



FCC CFR47 PART 15 SUBPART C

NFC

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+, NFC and WPT

MODEL NUMBER : SM-G973N

FCC ID: A3LSMG973KOR

REPORT NUMBER: 4788725709-E9V2

ISSUE DATE: JAN 17, 2019

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Testing
Laboratory

TL-637

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	01/07/19	Initial issue	Junwhan Lee
V2	01/17/19	Updated to address TCB's question	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
1.1. INTRODUCTION OF TEST DATA REUSE	5
1.2. DIFFERENCE	5
1.3. SPOT CHECK VERIFICATION DATA.....	5
1.4. REFERENCE DETAIL.....	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION.....	7
4.2. SAMPLE CALCULATION.....	7
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT.....	8
5.2. MAXIMUM E-FIELD STRENGTH.....	8
5.3. WORST-CASE CONFIGURATION AND MODE	8
5.4. DESCRIPTION OF TEST SETUP	9
6. TEST AND MEASUREMENT EQUIPMENT	12
7. 20dB BANDWIDTH	13
8. RADIATED EMISSION TEST RESULTS.....	14
8.1. LIMITS AND PROCEDURE	14
8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)	16
8.1.2. SPURIOUS EMISSION 0.09 TO 30 MHz.....	18
8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz	20
9. AC MAINS LINE CONDUCTED EMISSIONS.....	22
10. FREQUENCY STABILITY	31
11. SETUP PHOTOS	32

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+, NFC and WPT

MODEL NUMBER: SM-G973N

SERIAL NUMBER: R38KA0BE3PA, R38K8065W1D (CONDUCTED & RADIATED, Original); R39KA0LF5PR, R39KA0LETVN (RADIATED, Spotcheck);

DATE TESTED: NOV 28, 2018 - DEC 05, 2018; (Original)
DEC 07, 2018 (Spot check)

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMG973F DXX NFC (FCC CFR 47 Part 15C). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: A3LSMT973F, shares the same enclosure and circuit board as FCC ID: A3LSMG973F. The NFC antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMG973F remains representative of FCC ID: A3LSMG973KOR. The test data of FCC ID: A3LSMG973F being submitted for this application to cover NFC features.

1.3. SPOT CHECK VERIFICATION DATA

(Worst case of the radiated spurious and band edge emissions)

Mode	Test Item	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
				SM-G973F/DS Results	SM-G973N Results		
				FCC ID : A3LSMG973F	FCC ID : A3LSMG973N		
NFC	Fundamental	13.56 MHz	84.0 dBuV/m	19.73 dBuV/m	19.12 dBuV/m	-0.61 dB	Loop antenna Face on
	Emission	7.56735 MHz	29.5 dBuV/m	10.61 dBuV/m	12.71 dBuV/m	2.10 dB	Loop antenna Face off Noise floor level

Comparison of two models, upper deviation is within 3dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID	Type Grant/ Permissive Change	Reference Application	Folder Test/RF Exposure	Report Tittle / Section
DTS	A3LSMG973F	Grant	4788725460-E2	Test	FCC Report DTS(802.11b/g/n) WLAN / All sections
			4788725460-E3	Test	FCC Report DTS(802.11ax) WLAN / All sections
			4788725460-E6	Test	FCC Report BLE / All sections
NII	A3LSMG973F	Grant	4788725460-E4	Test	FCC Report UNII (802.11a/b/g/n/ac) WLAN / All sections
			4788725460-E5	Test	FCC Report UNII(802.11ax) WLAN / All sections
DSS	A3LSMG973F	Grant	4788725460-E7	Test	FCC Report BT / All sections
DXX	A3LSMG973F	Grant	4788725460-E8	Test	FCC Report ANT+ / All sections
			4788725460-E9	Test	FCC Report NFC / All sections
DCD	A3LSMG973F	Grant	4788725460-E10	Test	FCC Report WPT / All sections

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. ANSI C63.10-2013.
4. KDB 484596 D01 v01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+, NFC and WPT. This test report addresses the DXX (NFC) operational mode.

5.2. MAXIMUM E-FIELD STRENGTH

The testing was performed at 3 meter. The transmitter maximum E-field at 30m distance is 19.73 dBuV/m which convert from 3 meter data.

5.3. WORST-CASE CONFIGURATION AND MODE

The NFC function was tested at its' fundamental and only operational frequency of 13.56 MHz. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that the Z orientation was the worst-case orientation; therefore all final radiated testing was performed with the EUT in the Z orientation while generating continuous emissions.

The fundamental level of the EUT was investigated each type and bitrate. All test was performed worst case condition(type A and bit rate 106 kbps).

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA200	R37KB5B03T1SE3	N/A
Data Cable	SAMSUNG	EP-DG970BBE	N/A	N/A
Earphone	SAMSUNG	EO-IG955	N/A	N/A

I/O CABLE

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.1m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A


TEST SETUP

The EUT is a stand-alone device configured and tested in a worst-case setup.


Note: Worst case is using worst case orientation with AC charger attached to the EUT with NFC signal continuously transmitting.

SETUP DIAGRAM FOR TESTS

Radiated Emissions Below 30 MHz:

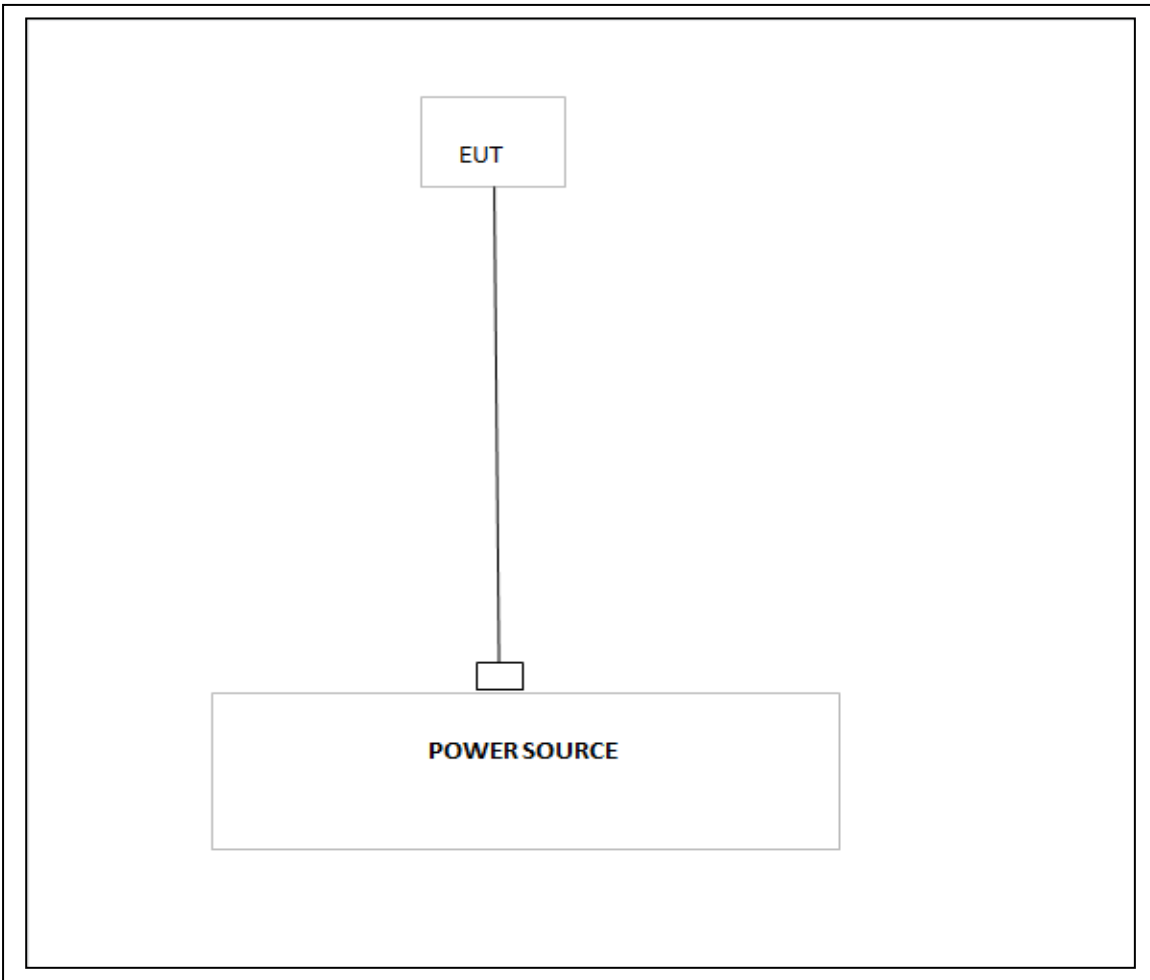

Radiated Emissions Above 30 MHz, AC Line Conducted Emissions:

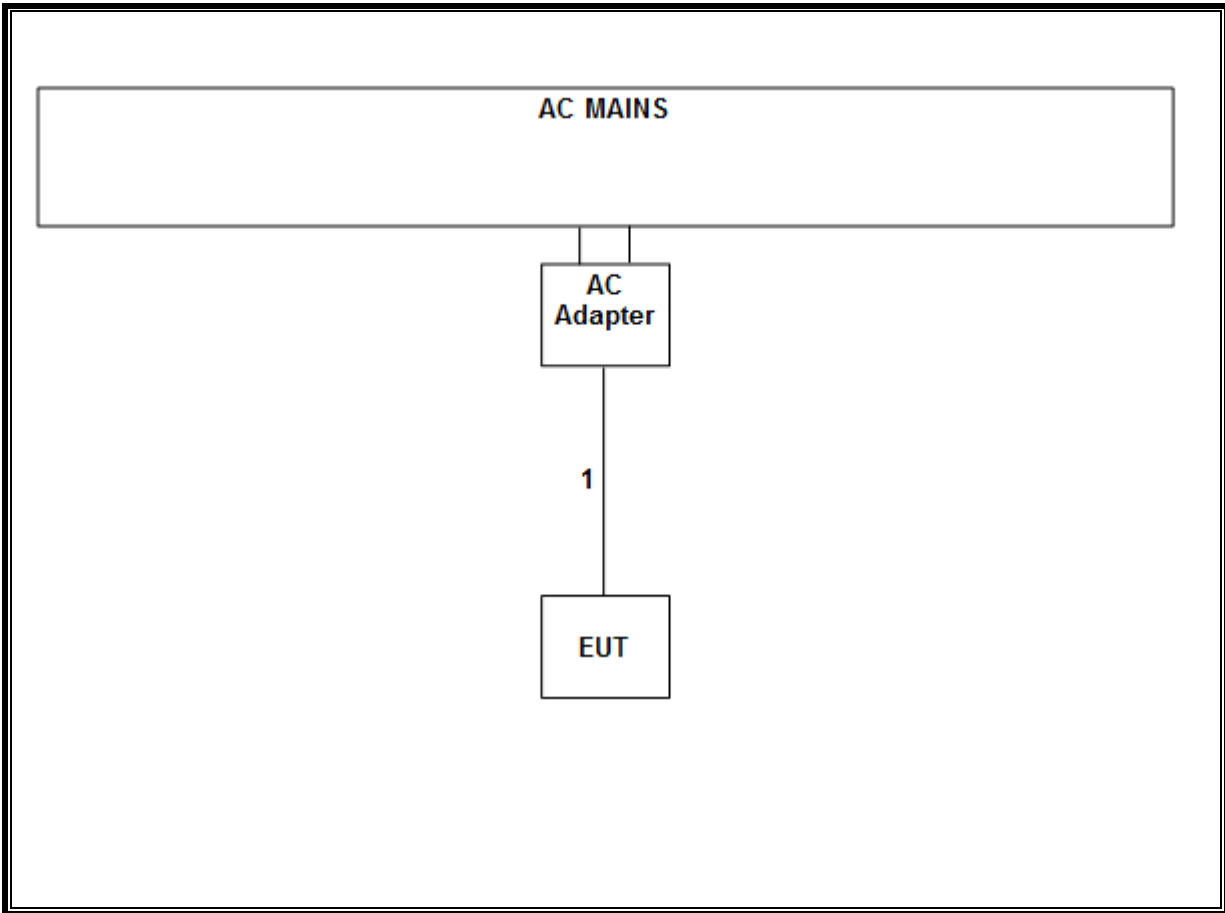

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-04-20
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-26-19
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-07-19
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-07-19
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-06-19
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-07-19
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-06-19
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY54200580	08-07-19
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-06-19
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-06-19
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-06-19
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-06-19
DC Power Supply	Agilent / HP	E3640A	MY54226395	08-06-19
Temperature Chamber	ESPEC	SH-642	93001109	08-06-19
LISN	R&S	ENV216	101837	08-06-19
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. 20dB BANDWIDTH

LIMITS

§15.215

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated

§15.225

Operation within the band 13.110 – 14.010MHz

TEST PROCEDURE

The spectrum analyzer connected receive antenna and the EUT placed on near the receive antenna. The RBW is set to 10KHz. The VBW is set to 3 times the RBW. The sweep time is coupled.

RESULTS

Frequency [MHz]	20dB Bandwidth [KHz]
13.56	435.90

20dB Bandwidth Plot



8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

§15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE


ANSI C63.10-2013

The EUT is an intentional radiator that incorporates a digital device. The highest fundamental frequency generated or used in the device is 13.56 MHz. The frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater (1000MHz)

RESULTS

No non-compliance noted:

8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)

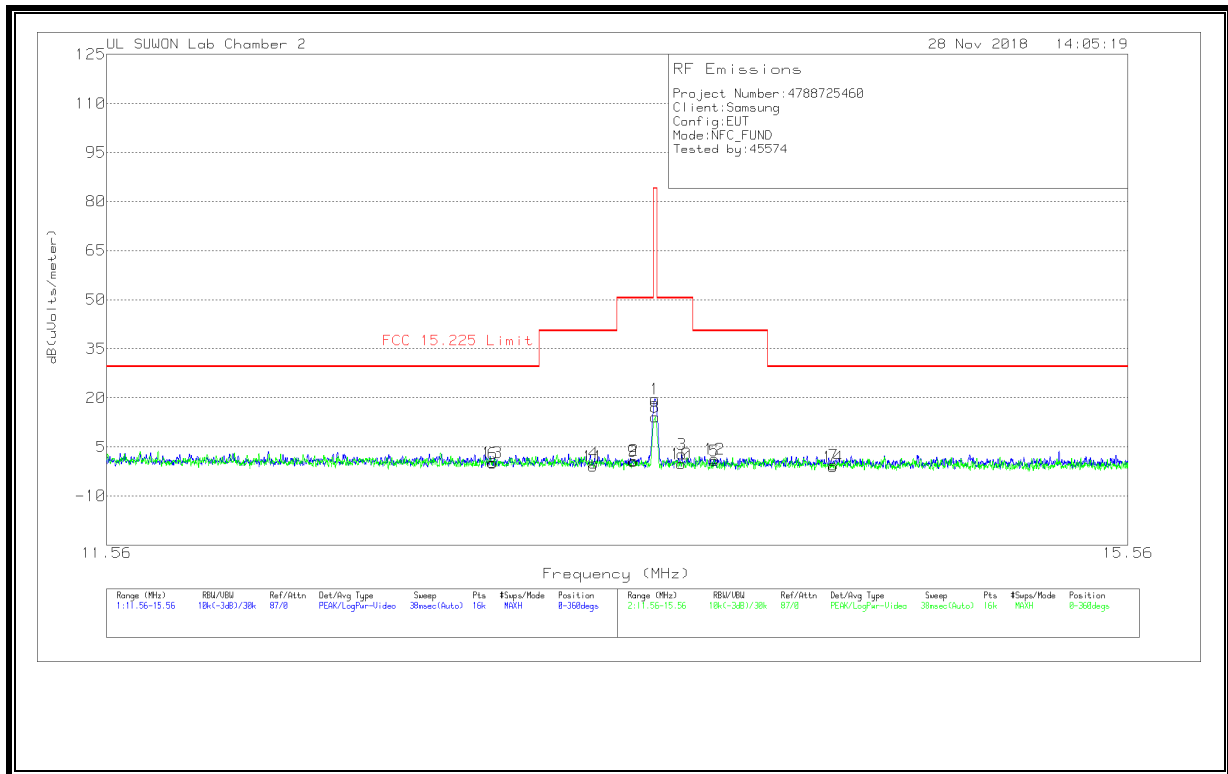

Trace Markers

[Face On]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
1	13.56	39.33	Pk	19.9	-40	.5	19.73	84	-64.27	0-360
2	13.4775	20.44	Pk	19.9	-40	.5	.84	50.5	-49.66	0-360
3	13.66625	22.3	Pk	19.9	-40	.6	2.8	50.5	-47.7	0-360
4	13.3205	19.64	Pk	19.9	-40	.5	.04	40.51	-40.47	0-360
5	13.798	20.33	Pk	19.8	-40	.6	.73	40.51	-39.78	0-360
6	12.93525	19.66	Pk	19.9	-40	.5	.06	29.54	-29.48	0-360
7	14.28375	19.1	Pk	19.8	-40	.6	-.5	29.54	-30.04	0-360


[Face Off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
8	13.56	33.64	Pk	19.9	-40	.5	14.04	84	-69.96	0-360
9	13.47525	20.12	Pk	19.9	-40	.5	.52	50.5	-49.98	0-360
10	13.66325	19.31	Pk	19.9	-40	.6	-.19	50.5	-50.69	0-360
11	13.319	18.75	Pk	19.9	-40	.5	-.85	40.51	-41.36	0-360
12	13.7965	20.92	Pk	19.8	-40	.6	1.32	40.51	-39.19	0-360
13	12.93225	19.76	Pk	19.9	-40	.5	.16	29.54	-29.38	0-360
14	14.281	18.47	Pk	19.8	-40	.6	-1.13	29.54	-30.67	0-360

Pk - Peak detector

Note : Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

8.1.2. SPURIOUS EMISSION 0.09 TO 30 MHz

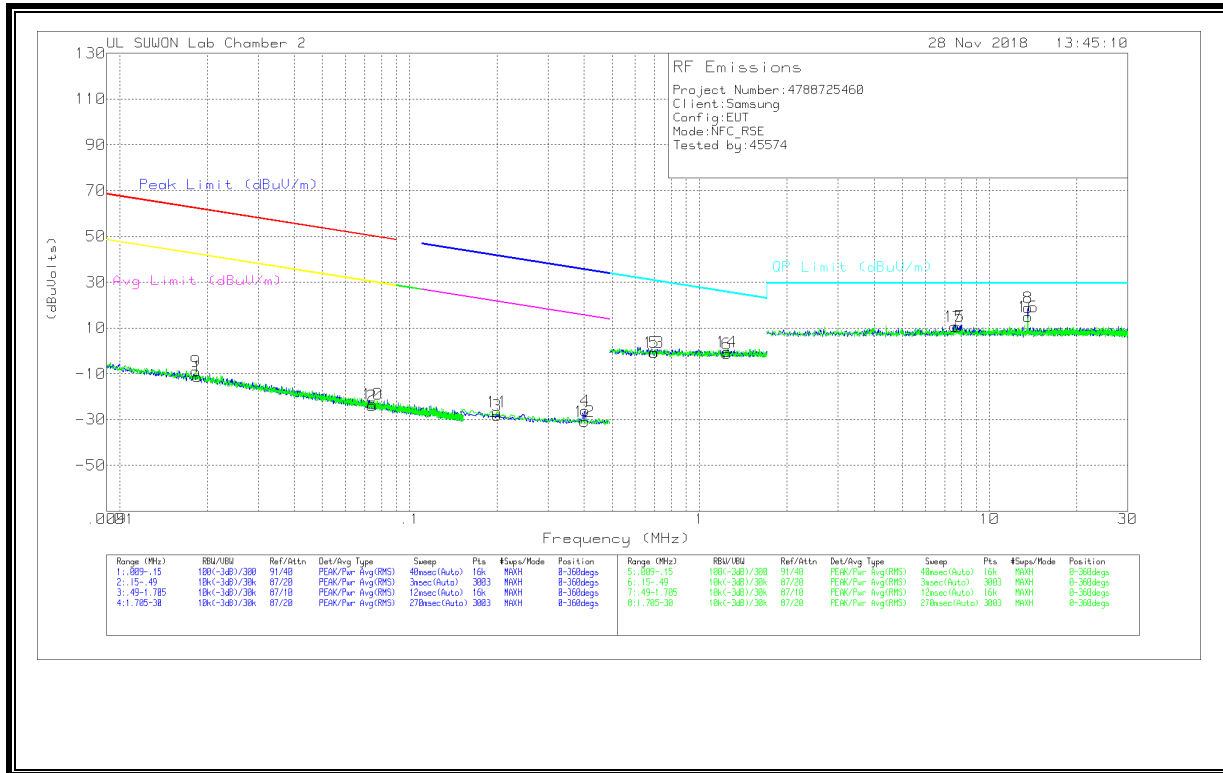

Trace Markers

[Face-On]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna	Cable Loss	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.01853	48.61	Pk	20	.1	-80	-11.29	62.23	-73.52	42.23	-53.52	-	-	-	-	0-360
2	.07406	36.04	Pk	19.8	.1	-80	-24.06	50.19	-74.25	30.19	-54.25	-	-	-	-	0-360

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna	Cable Loss	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
3	.19978	32.01	Pk	19.6	.1	-80	-28.29	41.61	-69.9	21.61	-49.9	0-360
4	.40272	34.29	Pk	19.6	.1	-80	-26.01	35.51	-61.52	15.51	-41.52	0-360

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading (dBuVolts)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
5	.69908	19.41	Pk	19.7	.1	-40	-.79	30.72	-31.51	0-360
6	1.24111	18.97	Pk	19.7	.2	-40	-1.13	25.75	-26.88	0-360
7	7.74643	30.09	Pk	19.9	.4	-40	10.39	29.5	-19.11	0-360

[Face-Off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna	Cable Loss	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
9	.01832	51	Pk	20	.1	-80	-8.9	62.33	-71.23	42.33	-51.23	-	-	-	-	0-360
10	.07441	36.88	Pk	19.8	.1	-80	-23.22	50.15	-73.37	30.15	-53.37	-	-	-	-	0-360


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna	Cable Loss	Dist Corr 300m	Corrected Reading (dBuVolts)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
11	.20068	33.68	Pk	19.6	.1	-80	-26.62	41.57	-68.19	21.57	-48.19	0-360
12	.40097	29.33	Pk	19.6	.1	-80	-30.97	35.54	-66.51	15.54	-46.51	0-360

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading (dBuVolts)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
13	.6955	19.55	Pk	19.7	.1	-40	-.65	30.77	-31.42	0-360
14	1.24073	19.62	Pk	19.7	.2	-40	-.48	25.75	-26.23	0-360
15	7.56735	30.31	Pk	19.9	.4	-40	10.61	29.5	-18.89	0-360

Pk - Peak detector

Note: The data for marker number 8 and 16 are the fundamental signal.
 Please refer to section 8.1.1 about the fundamental level.

8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz

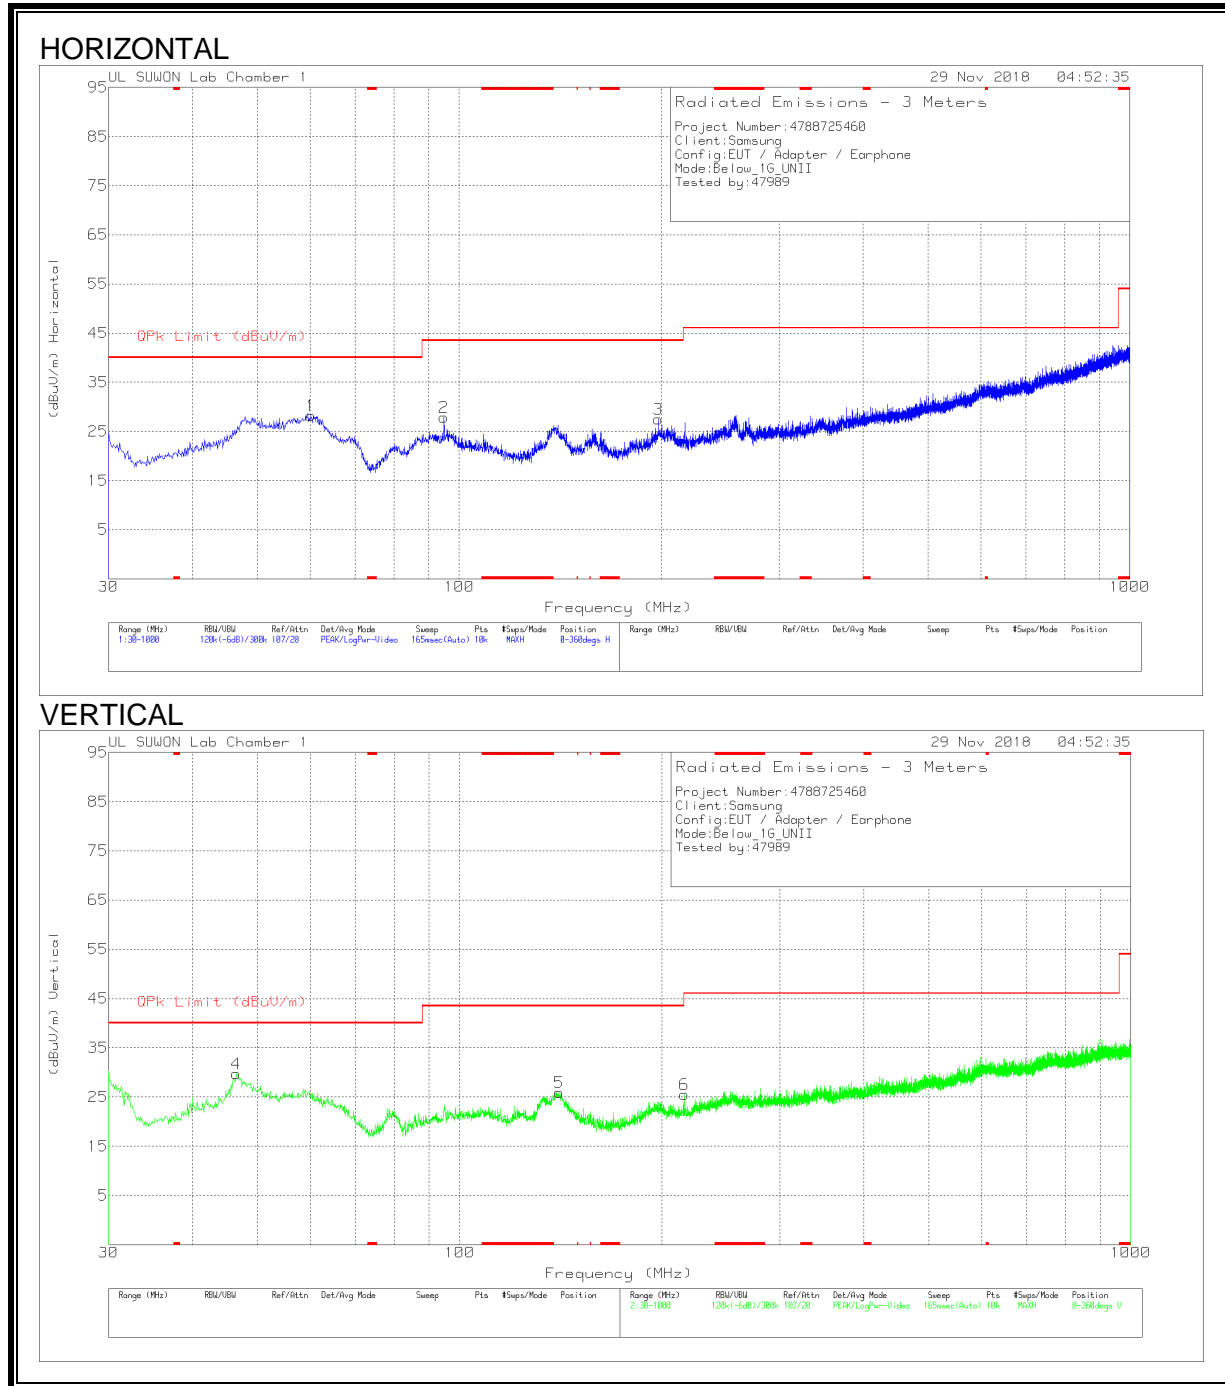

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_750	Below_1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	60.07	39.99	Pk	18.5	-30.3	28.19	40	-11.81	0-360	400	H
2	94.893	40.34	Pk	17.3	-29.8	27.84	43.52	-15.68	0-360	300	H
3	198.198	38.09	Pk	18	-28.6	27.49	43.52	-16.03	0-360	200	H
4	46.49	40.57	Pk	19.7	-30.5	29.77	40	-10.23	0-360	100	V
5	140.677	40.88	Pk	14.1	-29.1	25.88	43.52	-17.64	0-360	100	V
6	216.046	36.87	Pk	17.1	-28.4	25.57	46.02	-20.45	0-360	100	V

Pk - Peak detector

9. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:
 1. The lower limit shall apply at the transition frequencies
 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

WORST EMISSIONS(With Antenna)

LINE 1 PLOT

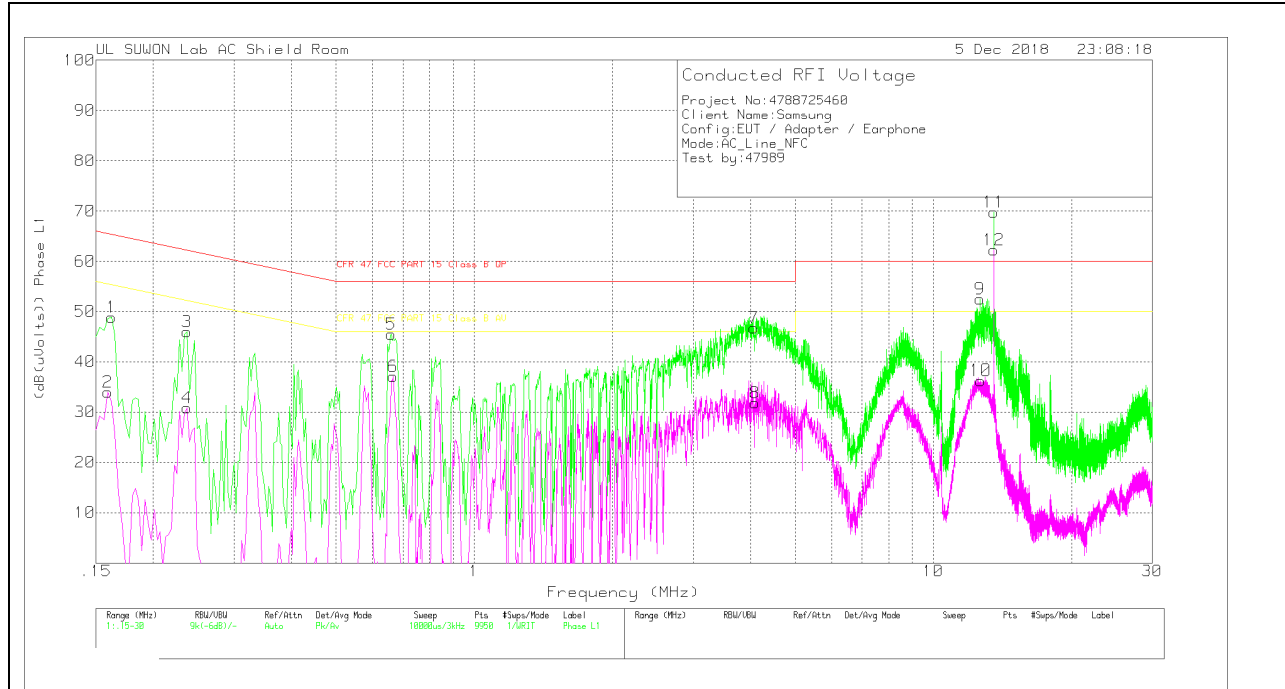

LINE 1 RESULTS

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	ENV216_101836_With excord_L1	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.162	38.81	Pk	10	.1	48.91	65.36	-16.45	-	-
2	.159	24.03	Av	9.9	.1	34.03	-	-	55.52	-21.49
3	.237	36.13	Pk	9.7	.2	46.03	62.2	-16.17	-	-
4	.237	20.99	Av	9.7	.2	30.89	-	-	52.2	-21.31
5	.66	35.34	Pk	9.9	.2	45.44	56	-10.56	-	-
6	.666	27.04	Av	9.9	.2	37.14	-	-	46	-8.86
7	4.071	36.59	Pk	9.8	.3	46.69	56	-9.31	-	-
8	4.092	21.8	Av	9.8	.3	31.9	-	-	46	-14.1
9	12.642	42.1	Pk	10.1	.3	52.5	60	-7.5	-	-
10	12.666	25.89	Av	10.1	.3	36.29	-	-	50	-13.71
11	13.56	59.21	Pk	10.1	.4	69.71	60	9.71	-	-
12	13.56	51.75	Av	10.1	.4	62.25	-	-	50	12.25

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	ENV216_101836_With excord_L1	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
4.07175	32.06	Qp	9.8	.3	42.16	56	-13.84	-	-
12.6422	33.08	Qp	10.1	.3	43.48	60	-16.52	-	-
13.5593	56.33	Qp	10.1	.4	66.83	60	6.83	-	-

Qp - Quasi-Peak detector

LINE 2 PLOT

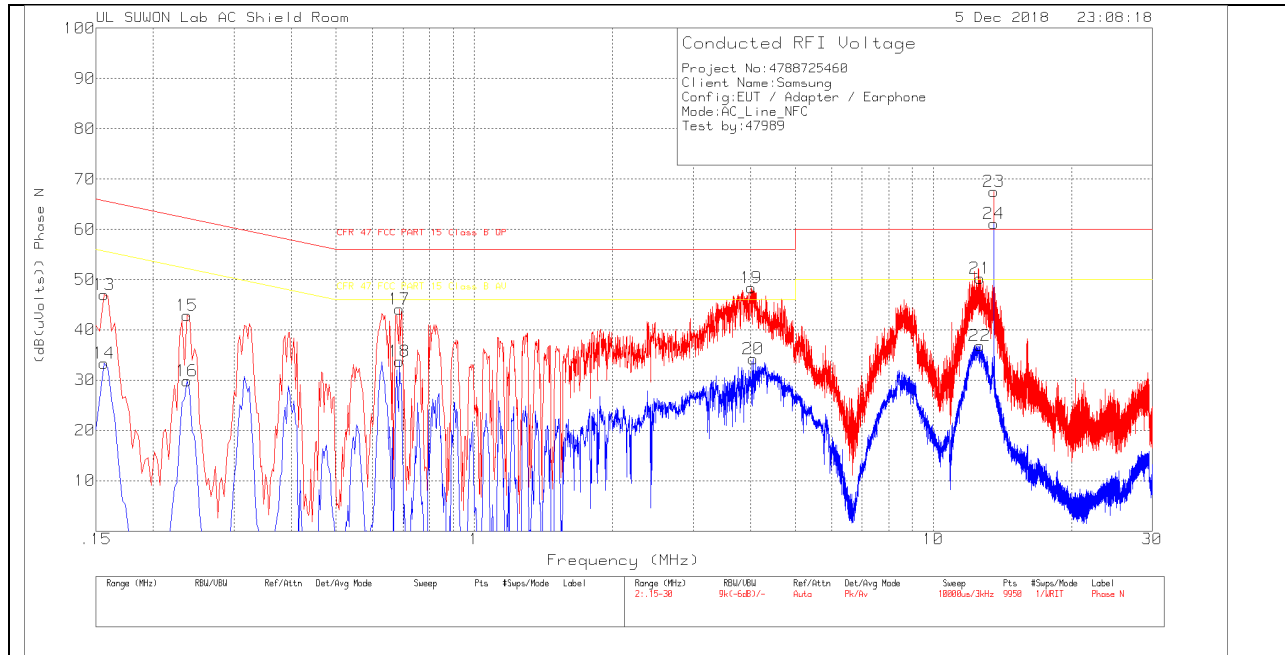

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	ENV216_101836_With ex-cord_N	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.156	37.04	Pk	9.8	.1	46.94	65.67	-18.73	-	-
14	.156	23.41	Av	9.8	.1	33.31	-	-	55.67	-22.36
15	.237	32.99	Pk	9.7	.2	42.89	62.2	-19.31	-	-
16	.237	19.92	Av	9.7	.2	29.82	-	-	52.2	-22.38
17	.687	34.02	Pk	9.9	.2	44.12	56	-11.88	-	-
18	.687	23.64	Av	9.9	.2	33.74	-	-	46	-12.26
19	4.02	38.21	Pk	9.8	.3	48.31	56	-7.69	-	-
20	4.056	24.18	Av	9.8	.3	34.28	-	-	46	-11.72
21	12.657	39.87	Pk	10.1	.3	50.27	60	-9.73	-	-
22	12.624	26.4	Av	10.1	.3	36.8	-	-	50	-13.2
23	13.56	56.96	Pk	10.2	.4	67.56	60	7.56	-	-
24	13.56	50.56	Av	10.2	.4	61.16	-	-	50	11.16

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions


Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	ENV216_101836_With ex-cord_N	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
4.01925	28.91	Qp	9.8	.3	39.01	56	-16.99	-	-
12.6578	28.73	Qp	10.1	.3	39.13	60	-20.87	-	-
13.5593	54.44	Qp	10.2	.4	65.04	60	5.04	-	-

Qp - Quasi-Peak detector

WORST EMISSIONS(Antenna Port Terminated)

LINE 1 PLOT

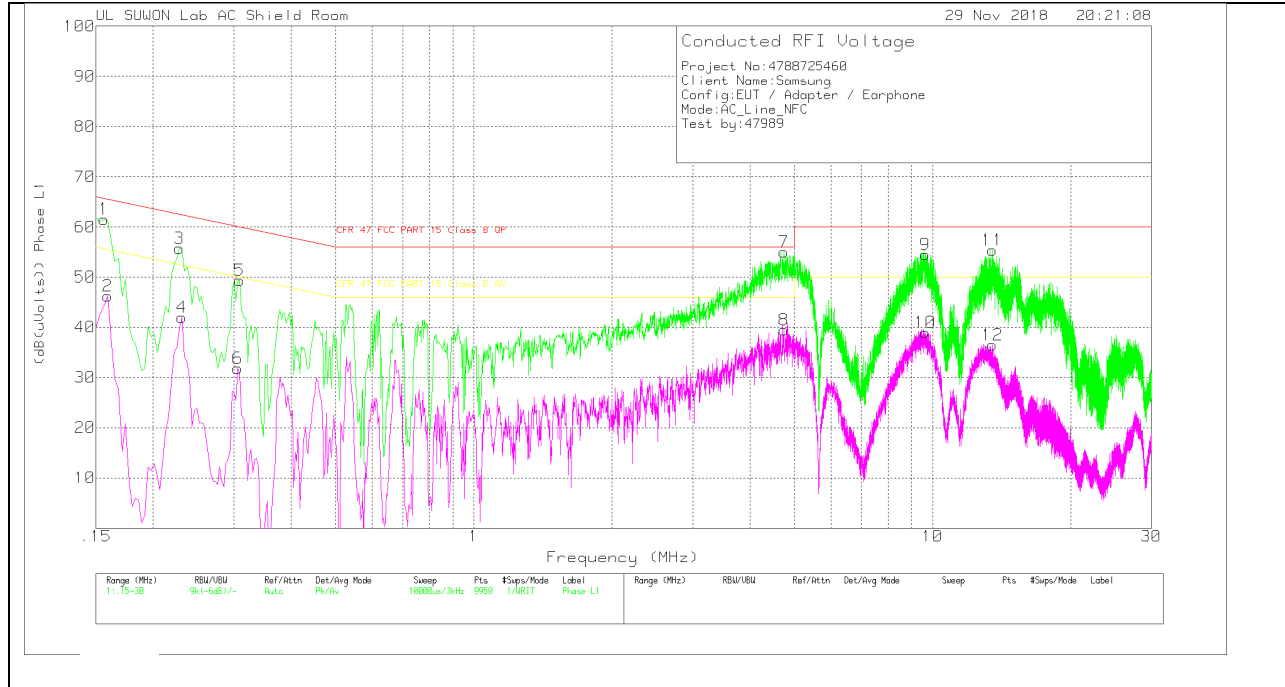

LINE 1 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	ENV216_101836_With ex-cord_N	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.156	45.8	Pk	9.8	.1	55.7	65.67	-9.97	-	-
14	.162	29.76	Av	9.9	.1	39.76	-	-	55.36	-15.6
15	.237	39.43	Pk	9.7	.2	49.33	62.2	-12.87	-	-
16	.237	22.51	Av	9.7	.2	32.41	-	-	52.2	-19.79
17	.324	32.48	Pk	9.8	.2	42.48	59.6	-17.12	-	-
18	.321	15.12	Av	9.8	.2	25.12	-	-	49.68	-24.56
19	4.629	44.47	Pk	9.8	.3	54.57	56	-1.43	-	-
20	4.65	26.39	Av	9.8	.3	36.49	-	-	46	-9.51
21	9.267	39.27	Pk	10	.4	49.67	60	-10.33	-	-
22	9.285	21.45	Av	10	.4	31.85	-	-	50	-18.15
23	13.407	40.7	Pk	10.2	.4	51.3	60	-8.7	-	-
24	13.389	23.44	Av	10.2	.4	34.04	-	-	50	-15.96

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	ENV216_101836_With ex-cord_N	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.15615	31.72	Qp	9.8	.1	41.62	65.67	-24.05	-	-
.23775	29.2	Qp	9.7	.2	39.1	62.17	-23.07	-	-
.32475	29.46	Qp	9.8	.2	39.46	59.58	-20.12	-	-
4.62975	33.15	Qp	9.8	.3	43.25	56	-12.75	-	-
9.26625	31.29	Qp	10	.4	41.69	60	-18.31	-	-
13.4078	33.72	Qp	10.2	.4	44.32	60	-15.68	-	-

Qp - Quasi-Peak detector

LINE 2 PLOT

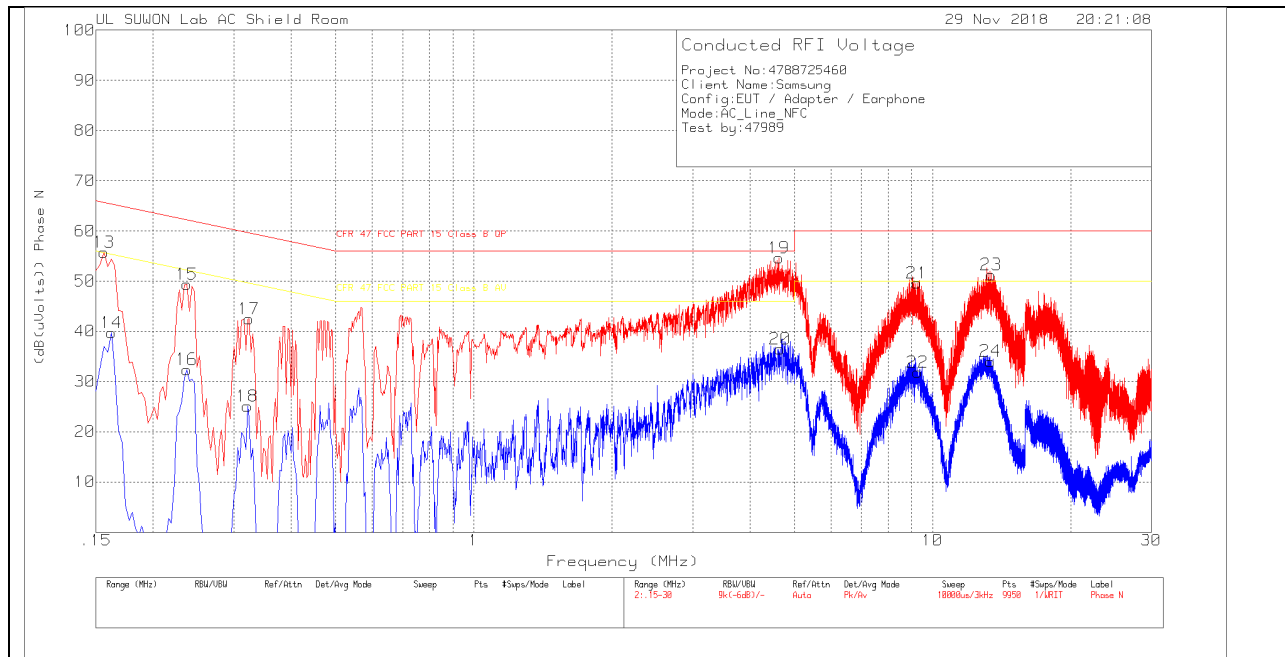

LINE 2 RESULTS

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	ENV216_101836_With ex-cord_L1	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.156	51.56	Pk	9.9	.1	61.56	65.67	-4.11	-	-
2	.159	36.23	Av	9.9	.1	46.23	-	-	55.52	-9.29
3	.228	45.69	Pk	9.8	.2	55.69	62.52	-6.83	-	-
4	.231	31.94	Av	9.8	.2	41.94	-	-	52.41	-10.47
5	.309	39.38	Pk	9.8	.2	49.38	60	-10.62	-	-
6	.306	21.89	Av	9.8	.2	31.89	-	-	50.08	-18.19
7	4.746	44.95	Pk	9.8	.3	55.05	56	-9.5	-	-
8	4.746	29.43	Av	9.8	.3	39.53	-	-	46	-6.47
9	9.633	44.09	Pk	10	.4	54.49	60	-5.51	-	-
10	9.654	28.61	Av	10	.4	39.01	-	-	50	-10.99
11	13.518	44.82	Pk	10.1	.4	55.32	60	-4.68	-	-
12	13.518	25.94	Av	10.1	.4	36.44	-	-	50	-13.56

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	ENV216_101836_With ex-cord_L1	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.15675	32.23	Qp	9.9	.1	42.23	65.63	-23.4	-	-
.22815	12.33	Qp	9.8	.2	22.33	62.52	-40.19	-	-
.30915	8.35	Qp	9.8	.2	18.35	59.99	-41.64	-	-
4.74525	34.51	Qp	9.8	.3	44.61	56	-11.39	-	-
9.63225	29.76	Qp	10	.4	40.16	60	-19.84	-	-
13.5182	34.85	Qp	10.1	.4	45.35	60	-14.65	-	-

Qp - Quasi-Peak detector

10. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST PROCEDURE

ANSI C63.10 §6.8

RESULTS

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.80	50	13.559997909	0.204	13.559997884	0.206	13.559997836	0.210	13.559997808	0.212	100
3.80	40	13.559997882	0.206	13.559997849	0.209	13.559997866	0.207	13.559997804	0.212	100
3.80	30	13.559998692	0.147	13.559998539	0.158	13.559998366	0.171	13.559998312	0.175	100
3.80	20	13.56000679	0	13.56000554	0.009	13.56000164	0.038	13.56000039	0.047	100
3.80	10	13.560001846	-0.086	13.560001771	-0.081	13.560001525	-0.062	13.560001145	-0.034	100
3.80	0	13.560002649	-0.145	13.560002541	-0.137	13.560002418	-0.128	13.560002176	-0.110	100
3.80	-10	13.560003891	-0.237	13.560003934	-0.240	13.560003982	-0.244	13.560003997	-0.245	100
3.80	-20	13.560003033	-0.174	13.560003099	-0.178	13.560003136	-0.181	13.560003189	-0.185	100
3.80	-30	13.560003014	-0.172	13.560003155	-0.183	13.560003291	-0.193	13.560003226	-0.188	100

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.80	20	13.56000679	0	13.56000554	0.009	13.56000164	0.038	13.56000039	0.047	100
4.30	20	13.560000705	-0.002	13.56000682	0.000	13.56000277	-0.008	13.56000115	0.042	100
3.60	20	13.560000782	-0.008	13.56000704	-0.002	13.56000245	-0.006	13.56000224	0.034	100

No non-compliance noted.