



CERTIFICATION TEST REPORT

Report Number. : 12563708-E1V4

Applicant : Samsung Electronics Co., Ltd.
129 Samsung-Ro, Yeongtong-Gu,
Suwon-Si, Gyeonggi-Do, 16677, Korea

Model : SM-G975F/DS and SM-G975F

FCC ID : A3LSMG975F

EUT Description : GSM/WCDMA/LTE phone with BT, DTS/UNII a/b/g/n/ac/11ax HE
20/40/80, ANT+ and NFC

Test Standard(s) : FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART F, H, L, and M
FCC CFR47 PART 90 SUBPART S

Date Of Issue:
JANUARY 30, 2019

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	1/15/2019	Initial Review	--
V2	1/25/2019	Removed previous Section 2; Updated Sections 1, 5.1, 5.2, 5.4, 6, 7.2, 7.3, 8, 9, 10, and 11	Steven Tran
V3	1/30/2019	Updated Section 5.2, 5.4, 5.5, and 9.2	Steven Tran
V4	1/30/2019	Updated Section 5.2, and 5.5	Steven Tran

TABLE OF CONTENTS

TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	8
2. TEST METHODOLOGY	9
3. FACILITIES AND ACCREDITATION	9
4. CALIBRATION AND UNCERTAINTY	10
4.1. MEASURING INSTRUMENT CALIBRATION.....	10
4.2. SAMPLE CALCULATION.....	10
4.3. MEASUREMENT UNCERTAINTY.....	10
5. EQUIPMENT UNDER TEST	11
5.1. DESCRIPTION OF EUT.....	11
5.2. MAXIMUM OUTPUT POWER.....	11
5.3. SOFTWARE AND FIRMWARE.....	19
5.4. MAXIMUM ANTENNA GAIN.....	19
5.5. WORST-CASE CONFIGURATION AND MODE.....	20
5.6. DESCRIPTION OF TEST SETUP.....	21
6. TEST AND MEASUREMENT EQUIPMENT	24
7. RF OUTPUT POWER VERIFICATION	25
7.1. GSM.....	25
7.1.1. GSM850.....	26
7.1.2. GSM1900.....	26
7.2. WCDMA.....	27
7.2.1. WCDMA BAND5.....	31
7.2.2. WCDMA BAND2.....	32
7.2.3. WCDMA BAND4.....	33
7.3. LTE.....	34
7.3.1. LTE 2.....	36
7.3.2. LTE 4.....	39
7.3.3. LTE 5.....	42
7.3.4. LTE 7.....	44
7.3.5. LTE 12.....	46
7.3.6. LTE 13.....	48



7.3.7.	LTE 17	49
7.3.8.	LTE 25	50
7.3.9.	LTE 26 (FCC PART 90S)	53
7.3.10.	LTE 26 (FCC PART 22)	56
7.3.11.	LTE 41 (FCC)	59
7.3.12.	LTE 66.....	61
8.	CONDUCTED TEST RESULTS	64
8.1.	OCCUPIED BANDWIDTH	64
8.1.1.	GSM.....	70
8.1.2.	WCDMA	71
8.1.3.	LTE BAND 2.....	72
8.1.4.	LTE BAND 4.....	74
8.1.5.	LTE BAND 5.....	76
8.1.6.	LTE BAND 7.....	78
8.1.7.	LTE BAND 12.....	80
8.1.8.	LTE BAND 13.....	82
8.1.9.	LTE BAND 17.....	83
8.1.10.	LTE BAND 25	84
8.1.11.	LTE BAND 26 (FCC PART 90S)	86
8.1.12.	LTE BAND 26 (FCC PART 22)	88
8.1.13.	LTE BAND 41	90
8.1.14.	LTE BAND 66	92
8.2.	BAND EDGE AND EMISSION MASK	94
8.2.1.	GSM850	96
8.2.2.	GSM1900	97
8.2.3.	WCDMA BAND5	98
8.2.4.	WCDMA BAND2	99
8.2.5.	WCDMA BAND4	100
8.2.6.	LTE BAND 2 BANDEDGE	101
8.2.7.	LTE BAND 4 BANDEDGE	113
8.2.8.	LTE BAND 5 BANDEDGE	125
8.2.9.	LTE BAND 7 ADJACENT CHANNEL POWER	133
8.2.10.	LTE BAND 12 BANDEDGE	141
8.2.11.	LTE BAND 13 BANDEDGE	149
8.2.12.	LTE BAND 17 BANDEDGE	152

8.2.13.	LTE BAND 25 BANDEDGE	156
8.2.14.	LTE BAND 26 EMISSION MASK (FCC PART 90S).....	168
8.2.15.	LTE BAND 26 BANDEDGE (FCC PART 22).....	176
8.2.16.	LTE BAND 41 ADJACENT CHANNEL POWER	185
8.2.17.	LTE BAND 66 BANDEDGE	193
8.3.	OUT OF BAND EMISSIONS	204
8.3.1.	GSM850.....	205
8.3.2.	GSM1900.....	207
8.3.3.	WCDMA BAND5	209
8.3.4.	WCDMA BAND2	211
8.3.5.	WCDMA BAND4	213
8.3.6.	LTE BAND 2.....	215
8.3.7.	LTE BAND 4.....	221
8.3.8.	LTE BAND 5.....	227
8.3.9.	LTE BAND 7.....	231
8.3.10.	LTE BAND 12	235
8.3.11.	LTE BAND 13	239
8.3.12.	LTE BAND 17	241
8.3.13.	LTE BAND 25	243
8.3.14.	LTE BAND 26	249
8.3.15.	LTE BAND 41	254
8.3.16.	LTE BAND 66	258
8.4.	FREQUENCY STABILITY	264
8.4.1.	GSM.....	265
8.4.2.	WCDMA	267
8.4.3.	LTE BAND 2.....	270
8.4.4.	LTE BAND 4.....	271
8.4.5.	LTE BAND 5.....	272
8.4.6.	LTE BAND 7.....	273
8.4.7.	LTE BAND 12.....	274
8.4.8.	LTE BAND 13.....	275
8.4.9.	LTE BAND 17.....	276
8.4.10.	LTE BAND 25	277
8.4.11.	LTE BAND 26 (FCC PART 90S).....	278
8.4.12.	LTE BAND 26 (FCC PART 22)	279

8.4.13.	LTE BAND 41 (FCC)	280
8.4.14.	LTE BAND 66	281
8.5.	PEAK TO AVERAGE RATIO	282
8.5.1.	GSM	283
8.5.2.	WCDMA	284
8.5.3.	LTE BAND 2	285
8.5.4.	LTE BAND 4	287
8.5.5.	LTE BAND 5	289
8.5.6.	LTE BAND 7	291
8.5.7.	LTE BAND 12	293
8.5.8.	LTE BAND 13	295
8.5.9.	LTE BAND 17	296
8.5.10.	LTE BAND 25	297
8.5.11.	LTE BAND 26 (FCC PART 90S)	299
8.5.12.	LTE BAND 26 (FCC PART 22)	301
8.5.13.	LTE BAND 41	303
8.5.14.	LTE BAND 66	305
9.	RADIATED TEST RESULTS	307
9.1.	EFFECTIVE RADIATED POWER ERP/EIRP	307
9.1.1.	GSM	315
9.1.2.	WCDMA	316
9.1.3.	LTE Band 2	317
9.1.4.	LTE Band 4	317
9.1.5.	LTE Band 5	318
9.1.6.	LTE Band 7	318
9.1.7.	LTE Band 12	319
9.1.8.	LTE Band 13	319
9.1.9.	LTE Band 17	320
9.1.10.	LTE Band 25	320
9.1.11.	LTE Band 26 (FCC PART 90S)	321
9.1.12.	LTE Band 26 (FCC PART 22)	321
9.1.13.	LTE Band 41	322
9.1.14.	LTE Band 66	322
9.2.	FIELD STRENGTH OF SPURIOUS RADIATION	323
9.2.1.	GSM	324

9.2.2.	WCDMA	328
9.2.3.	LTE BAND 2.....	334
9.2.4.	LTE BAND 4.....	336
9.2.5.	LTE BAND 5.....	338
9.2.6.	LTE BAND 7.....	340
9.2.7.	LTE BAND 12.....	342
9.2.8.	LTE BAND 13.....	344
9.2.9.	LTE BAND 17.....	346
9.2.10.	LTE BAND 25	348
9.2.11.	LTE BAND 26 Part 90S	350
9.2.12.	LTE BAND 26 Part 22.....	352
9.2.13.	LTE BAND 41	354
9.2.14.	LTE BAND 66	356
9.2.15.	SPOT CHECK DATA HARMONICS AND SPURIOUS EMISSIONS (CERAMIC)	358
10.	APPENDIX A: PRE-SCAN DATA FOR 15B RECEIVER MODE	370
10.1.	GSM850	370
10.1.1.	BELOW 1GHz.....	370
10.1.2.	ABOVE 1GHz	376
10.2.	WCDMA B5.....	382
10.2.1.	BELOW 1GHz.....	382
10.2.2.	ABOVE 1GHz	388
10.3.	LTE Band 5	394
10.3.1.	BELOW 1GHz.....	394
10.3.2.	ABOVE 1GHz	400
10.4.	LTE Band 12	406
10.4.1.	BELOW 1GHz.....	406
10.4.2.	ABOVE 1GHz	412
10.1.	LTE Band 13	418
10.1.1.	BELOW 1GHz.....	418
10.1.2.	ABOVE 1GHz	420
10.2.	LTE Band 26	422
10.2.1.	BELOW 1GHz.....	422
10.2.2.	ABOVE 1GHz	424
11.	SETUP PHOTOS.....	426

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	SAMSUNG ELECTRONICS CO., LTD. 129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI, GYEONGGI-DO, 16677, KOREA	
Model	SM-G975F/DS and SM-G975F	
FCC ID	A3LSMG975F	
EUT Description	GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC/11AX HE 20/40/80, ANT+ AND NFC	
Serial Number	R38KA0L98YA (Conducted); R38KA0L95XE, R38KA0L973P (Glass Radiated) R38KA092MAP. R38KA092LJB (Ceramic Radiated)	
Date Tested	OCTOBER 23, 2018 to JANUARY 25, 2019	
Applicable Standards	FCC CFR 47 PART 22H, 24E, 27F,H,L,M and 90S	
Test Results	Complies	
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.</p> <p>This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.</p>		
Approved & Released For UL Verification Services Inc. By:	Reviewed By:	
		
Dan Corona Operations Leader Consumer Technology Division UL Verification Services Inc.	Steven Tran Project Engineer Consumer Technology Division UL Verification Services Inc.	

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26:2015, ANSI C63.4:2014, TIA-603-E, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, Part 90, FCC KDB 971168 D01 v3r1.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd
<input checked="" type="checkbox"/> Chamber A (ISED:2324B-1)	<input type="checkbox"/> Chamber D (ISED:22541-1)	<input type="checkbox"/> Chamber I (ISED:2324A-5)
<input checked="" type="checkbox"/> Chamber B (ISED:2324B-2)	<input type="checkbox"/> Chamber E (ISED:22541-2)	<input type="checkbox"/> Chamber J (ISED:2324A-6)
<input type="checkbox"/> Chamber C (ISED:2324B-3)	<input type="checkbox"/> Chamber F (ISED:22541-3)	<input type="checkbox"/> Chamber K (ISED:2324A-1)
	<input type="checkbox"/> Chamber G (ISED:22541-4)	<input type="checkbox"/> Chamber L (ISED:2324A-3)
	<input type="checkbox"/> Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$
$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Final Voltage (dBuV)} = \text{Measured Voltage (dBuV)} + \text{Cable Loss (dB)} + \text{Limiter Factor (dB)} + \text{LISN Insertion Loss.}$$
$$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE phone with BT, DTS/UNII a/b/g/n/ac/11ax HE 20/40/80, ANT+ and NFC. The model SM-G975F was used for final testing and is representative of the test results in this report.

5.2. MAXIMUM OUTPUT POWER

ERP/EIRP LIMIT

FCC: §2.1046, §22.913, §24.232, §27.50, §90.635

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015/ TIA-603-E Clause 2.2.17
KDB 971168 D01 Section 5.6
KDB 412172 D01

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

The transmitter has a maximum average conducted and ERP / EIRP output powers as follows:

GSM MODES

Part 22 850MHz								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
824.2-848.8	GPRS	33.5	0.70	7.0	32.05	1.603	244.8	245KGXW
	EGPRS	27.0			25.55	0.359	236.5	237KG7W
Part 24 1900MHz								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1850.2-1909.8	GPRS	30.6	2.30	2.0	32.92	1.959	245.1	245KGXW
	EGPRS	26.0			28.30	0.676	239.06	239KG7W

WCDMA MODE

Part 22 Band 5								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
826.4-846.6	REL 99	24.4	0.70	7.0	22.95	0.197	4160	4M16F9W
	HSDPA	23.3			21.85	0.153	4170	4M17F9W
Part 24 Band 2								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1852.4-1907.6	REL 99	23.2	2.30	2.0	25.50	0.355	4170	4M17F9W
	HSDPA	23.2			25.50	0.355	4160	4M16F9W
Part 27 Band 4								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1712.4-1752.6	REL 99	22.9	1.20	1.0	24.10	0.257	4160	4M16F9W
	HSDPA	22.8			24.00	0.251	4160	4M16F9W

LTE BAND 2

Part 24								
EIRP Limit (W)		2.00						
Antenna Gain (dBi)		2.30						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	1850.7	1909.3	23.1	25.40	0.347	1080	1M08G7W
	16QAM			22.4	24.70	0.295	1090	1M09D7W
	64QAM			21.2	23.50	0.224		
3.0	QPSK	1851.5	1908.5	23.1	25.40	0.347	2690	2M69G7W
	16QAM			22.4	24.70	0.295	2690	2M69D7W
	64QAM			21.3	23.60	0.229		
5.0	QPSK	1852.5	1907.5	23.0	25.30	0.339	4510	4M51G7W
	16QAM			22.4	24.70	0.295	4510	4M51D7W
	64QAM			21.3	23.60	0.229		
10.0	QPSK	1855.0	1905.0	23.1	25.40	0.347	8960	8M96G7W
	16QAM			22.6	24.90	0.309	8970	8M97D7W
	64QAM			21.3	23.60	0.229		
15.0	QPSK	1857.5	1902.5	23.3	25.60	0.363	13430	13M4G7W
	16QAM			22.5	24.80	0.302	13420	13M4D7W
	64QAM			21.4	23.70	0.234		
20.0	QPSK	1860.0	1900.0	23.2	25.50	0.355	17890	17M9G7W
	16QAM			22.5	24.80	0.302	17910	17M9D7W
	64QAM			21.5	23.80	0.240		

LTE BAND 4

Part 27								
EIRP Limit (W)		1.00						
Antenna Gain (dBi)		1.20						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	1710.7	1754.3	23.7	24.90	0.309	1080	1M08G7W
	16QAM			22.9	24.10	0.257	1090	1M09D7W
	64QAM			21.9	23.10	0.204		
3.0	QPSK	1711.5	1753.5	23.7	24.90	0.309	2690	2M69G7W
	16QAM			23.0	24.20	0.263	2700	2M70D7W
	64QAM			21.8	23.00	0.200		
5.0	QPSK	1712.5	1752.5	23.6	24.80	0.302	4520	4M52G7W
	16QAM			22.9	24.10	0.257	4500	4M50D7W
	64QAM			22.0	23.20	0.209		
10.0	QPSK	1715.0	1750.0	23.7	24.90	0.309	8950	8M95G7W
	16QAM			23.0	24.20	0.263	8970	8M97D7W
	64QAM			21.9	23.10	0.204		
15.0	QPSK	1717.5	1747.5	23.7	24.90	0.309	13400	13M4G7W
	16QAM			23.0	24.20	0.263	13390	13M4D7W
	64QAM			22.0	23.20	0.209		
20.0	QPSK	1720.0	1745.0	23.7	24.90	0.309	17870	17M9G7W
	16QAM			23.2	24.40	0.275	17860	17M9D7W
	64QAM			22.0	23.20	0.209		

LTE BAND 5

Part 22H								
ERP Limit (W)		7.00						
Antenna Gain (dBi)		0.70						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	824.7	848.3	24.8	23.35	0.216	1080	1M08G7W
	16QAM			22.6	21.15	0.130	1090	1M09D7W
	64QAM			21.5	20.05	0.101		
3.0	QPSK	825.5	847.5	25.0	23.55	0.226	2690	2M69G7W
	16QAM			22.9	21.45	0.140	2690	2M69D7W
	64QAM			21.4	19.95	0.099		
5.0	QPSK	826.5	846.5	24.9	23.45	0.221	4520	4M52G7W
	16QAM			22.6	21.15	0.130	4510	4M51D7W
	64QAM			21.7	20.25	0.106		
10.0	QPSK	829.0	844.0	24.7	23.25	0.211	8950	8M95G7W
	16QAM			22.5	21.05	0.127	8950	8M95D7W
	64QAM			21.5	20.05	0.101		

LTE BAND 7

Part 27								
EIRP Limit (W)		2.00						
Antenna Gain (dBi)		-0.20						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
5.0	QPSK	2502.5	2567.5	24.9	24.70	0.295	4510	4M51G7W
	16QAM			22.5	22.30	0.170	4500	4M50D7W
	64QAM			21.7	21.50	0.141		
10.0	QPSK	2505.0	2565.0	24.0	23.80	0.240	8970	8M97G7W
	16QAM			22.7	22.50	0.178	8970	8M97D7W
	64QAM			21.5	21.30	0.135		
15.0	QPSK	2507.5	2562.5	25.0	24.80	0.302	13420	13M4G7W
	16QAM			22.7	22.50	0.178	13400	13M4D7W
	64QAM			21.6	21.40	0.138		
20.0	QPSK	2510.0	2560.0	24.7	24.50	0.282	17880	17M9G7W
	16QAM			22.6	22.40	0.174	17910	17M9D7W
	64QAM			21.6	21.40	0.138		

LTE BAND 12

Part 27									
ERP Limit (W)		3.00							
Antenna Gain (dBi)		-0.50							
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator	
1.4	QPSK	699.7	715.3	23.9	21.25	0.133	1090	1M09G7W	
	16QAM			23.3	20.65	0.116	1090	1M09D7W	
	64QAM			22.2	19.55	0.090			
3.0	QPSK	700.5	714.5	24.1	21.45	0.140	2690	2M69G7W	
	16QAM			23.5	20.85	0.122	2700	2M70D7W	
	64QAM			22.2	19.55	0.090			
5.0	QPSK	701.5	713.5	24.1	21.45	0.140	4490	4M49G7W	
	16QAM			23.3	20.65	0.116	4510	4M51D7W	
	64QAM			22.2	19.55	0.090			
10.0	QPSK	704.0	711.0	23.8	21.15	0.130	8960	8M96G7W	
	16QAM			23.2	20.55	0.114	8950	8M95D7W	
	64QAM			22.0	19.35	0.086			

LTE BAND 13

Part 27									
ERP Limit (W)		3.00							
Antenna Gain (dBi)		-1.50							
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator	
5.0	QPSK	779.5	784.5	23.9	20.25	0.106	4500	4M50G7W	
	16QAM			23.3	19.65	0.092	4510	4M51D7W	
	64QAM			23.2	19.55	0.090			
10.0	QPSK	782.0	782.0	23.8	20.15	0.104	8950	8M95G7W	
	16QAM			22.3	18.65	0.073	8960	8M96D7W	
	64QAM			22.2	18.55	0.072			

LTE BAND 17

Part 27									
ERP Limit (W)		3.00							
Antenna Gain (dBi)		-0.50							
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator	
5.0	QPSK	706.5	713.5	23.9	21.25	0.133	4510	4M51G7W	
	16QAM			22.5	19.85	0.097	4500	4M50D7W	
	64QAM			22.3	19.65	0.092			
10.0	QPSK	709.0	711.0	23.8	21.15	0.130	8960	8M96G7W	
	16QAM			22.6	19.95	0.099	8960	8M96D7W	
	64QAM			22.3	19.65	0.092			

LTE BAND 25

Part 24								
EIRP Limit (W)		2.00						
Antenna Gain (dBi)		2.30						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	1850.7	1914.3	23.5	25.80	0.380	1090	1M09G7W
	16QAM			22.8	25.10	0.324	1090	1M09D7W
	64QAM			21.4	23.70	0.234		
3.0	QPSK	1851.5	1913.5	23.5	25.80	0.380	2690	2M69G7W
	16QAM			22.9	25.20	0.331	2690	2M69D7W
	64QAM			21.4	23.70	0.234		
5.0	QPSK	1852.5	1912.5	23.5	25.80	0.380	4510	4M51G7W
	16QAM			22.7	25.00	0.316	4520	4M52D7W
	64QAM			21.5	23.80	0.240		
10.0	QPSK	1855.0	1910.0	23.6	25.90	0.389	8960	8M96G7W
	16QAM			22.8	25.10	0.324	8960	8M96D7W
	64QAM			21.5	23.80	0.240		
15.0	QPSK	1857.5	1907.5	23.7	26.00	0.398	13420	13M4G7W
	16QAM			22.8	25.10	0.324	13390	13M4D7W
	64QAM			21.6	23.90	0.245		
20.0	QPSK	1860.0	1905.0	23.7	26.00	0.398	17920	17M9G7W
	16QAM			22.9	25.20	0.331	17920	17M9D7W
	64QAM			21.7	24.00	0.251		

LTE BAND 26 (FCC Part 90S)

Part 90S								
ERP Limit (W)		100.00						
Antenna Gain (dBi)		0.80						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	814.7	823.3	24.0	22.65	0.184	1090	1M09G7W
	16QAM			23.5	22.15	0.164	1080	1M08D7W
	64QAM			22.2	20.85	0.122		
3.0	QPSK	815.5	822.5	24.0	22.65	0.184	2700	2M70G7W
	16QAM			23.1	21.75	0.150	2700	2M70D7W
	64QAM			22.0	20.65	0.116		
5.0	QPSK	816.5	821.5	24.0	22.65	0.184	4520	4M52G7W
	16QAM			23.2	21.85	0.153	4530	4M53D7W
	64QAM			22.0	20.65	0.116		
10.0	QPSK	819.0	819.0	23.9	22.55	0.180	8960	8M96G7W
	16QAM			23.3	21.95	0.157	8950	8M95D7W
	64QAM			22.1	20.75	0.119		
15.0	QPSK	821.5	821.5	24.2	22.85	0.193	13420	13M4G7W
	16QAM			23.2	21.85	0.153	13400	13M4D7W
	64QAM			21.8	20.45	0.111		

LTE BAND 26 (FCC Part 22)

Part 22								
ERP Limit (W)		7.00						
Antenna Gain (dBi)		0.70						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	824.7	848.3	24.0	22.55	0.180	1080	1M08G7W
	16QAM			23.3	21.85	0.153	1090	1M09D7W
	64QAM			22.4	20.95	0.124		
3.0	QPSK	825.5	847.5	23.9	22.45	0.176	2690	2M69G7W
	16QAM			23.3	21.85	0.153	2670	2M67D7W
	64QAM			22.4	20.95	0.124		
5.0	QPSK	826.5	846.5	23.9	22.45	0.176	4500	4M50G7W
	16QAM			23.4	21.95	0.157	4490	4M49D7W
	64QAM			22.1	20.65	0.116		
10.0	QPSK	829.0	844.0	23.9	22.45	0.176	8960	8M96G7W
	16QAM			23.3	21.85	0.153	8970	8M97D7W
	64QAM			22.1	20.65	0.116		
15.0	QPSK	831.5	841.5	24.0	22.55	0.180	13370	13M4G7W
	16QAM			23.5	22.05	0.160	13370	13M4D7W
	64QAM			22.2	20.75	0.119		

LTE BAND 41

Part 27								
EIRP Limit (W)		2.00						
Antenna Gain (dBi)		-1.40						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
5.0	QPSK	2498.5	2687.5	23.9	22.50	0.178	4510	4M51G7W
	16QAM			21.7	20.30	0.107	4500	4M50D7W
	64QAM			20.9	19.50	0.089		
10.0	QPSK	2501.0	2685.0	24.0	22.60	0.182	9000	9M00G7W
	16QAM			22.2	20.80	0.120	8930	8M93D7W
	64QAM			20.9	19.50	0.089		
15.0	QPSK	2503.5	2682.5	24.0	22.60	0.182	13410	13M4G7W
	16QAM			22.0	20.60	0.115	13380	13M4D7W
	64QAM			21.0	19.60	0.091		
20.0	QPSK	2506.0	2680.0	24.0	22.60	0.182	17860	17M9G7W
	16QAM			22.0	20.60	0.115	17900	17M9D7W
	64QAM			21.4	20.00	0.100		

LTE BAND 66

Part 27								
EIRP Limit (W)		1.00						
Antenna Gain (dBi)		1.20						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	1710.7	1779.3	23.2	24.40	0.275	1080	1M08G7W
	16QAM			22.4	23.60	0.229	1080	1M08D7W
	64QAM			21.5	22.70	0.186		
3.0	QPSK	1711.5	1778.5	23.2	24.40	0.275	2680	2M68G7W
	16QAM			22.4	23.60	0.229	2690	2M69D7W
	64QAM			21.3	22.50	0.178		
5.0	QPSK	1712.5	1777.5	23.2	24.40	0.275	4500	4M50G7W
	16QAM			22.3	23.50	0.224	4510	4M51D7W
	64QAM			21.4	22.60	0.182		
10.0	QPSK	1715.0	1775.0	23.1	24.30	0.269	8950	8M95G7W
	16QAM			22.4	23.60	0.229	8970	8M97D7W
	64QAM			21.3	22.50	0.178		
15.0	QPSK	1717.5	1772.5	23.2	24.40	0.275	13430	13M4G7W
	16QAM			22.6	23.80	0.240	13410	13M4D7W
	64QAM			21.5	22.70	0.186		
20.0	QPSK	1720.0	1770.0	23.2	24.40	0.275	17900	17M9G7W
	16QAM			22.7	23.90	0.245	17890	17M9D7W
	64QAM			21.3	22.50	0.178		

5.3. SOFTWARE AND FIRMWARE

The EUT firmware and software version installed during testing was G975F.001

5.4. MAXIMUM ANTENNA GAIN

Please see table below:

LTE Bands	Antenna Gain (dBi)
GSM850, 824-849MHz	0.7
GSM1900, 1850-1910MHz	2.3
WCDMA Band 2, 1850-1910 MHz	2.3
WCDMA Band 4, 1710-1755 MHz	1.2
WCDMA Band 5, 824-849 MHz	0.7
LTE BAND 2, 1850 - 1910 MHz	2.3
LTE BAND 4, 1710 - 1755 MHz	1.2
LTE BAND 5, 824 - 849 MHz	0.7
LTE BAND 7, 2500 - 2570 MHz	-0.2
LTE BAND 12, 699 - 716 MHz	-0.5
LTE BAND 13, 777 - 787 MHz	-1.5
LTE BAND 17, 704 - 716 MHz	-0.5
LTE BAND 25, 1850 - 1915 MHz	2.3
LTE BAND 26 (FCC PART 22), 824 - 849 MHz	0.7
LTE BAND 26 (FCC PART 90S), 814 - 824 MHz	0.8
LTE BAND 41 (FCC), 2496 - 2690 MHz	-1.4
LTE BAND 66, 1710 - 1780 MHz	1.2

Note: the antenna gain listed above is the highest between glass and ceramic samples.

5.5. WORST-CASE CONFIGURATION AND MODE

WORST-CASE CONFIGURATION AND MODE FOR FINAL TEST

This device may be formed with two different exterior materials: Glass and Ceramic. Glass model was set for full test and additional spot check verification was done with Ceramic model for radiated harmonic spurious as documented.

The EUT supports LTE Bands of:

Band 2, Band 4, Band 5, Band 7, Band 12, Band 13, Band 17, Band 25, Band 26, Band 38, Band 41 and Band 66.

The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM, and 64QAM modulations. All testing was performed using QPSK, and 16QAM modulations to represent the worst case.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, & Z, and it was determined that Y-Axis for 700MHz and 1880MHz, X-Axis for 800MHz, and X-Axis for 2500MHz with AC/DC Adapter and headset was worst-case orientation.

All radios that can be transmitted simultaneously have been evaluated for radiated for all possible combinations of transmission and found to be in compliance.

In addition, LTE Band 38[Single carrier] (Frequency range: 2570-2620 MHz) is covered by LTE Band 41 (Frequency range: 2496-2690 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

For the Part15B receiver mode (Appendix A):

For GSM850/LTE B5/WCDMA B5, the spurious emissions was investigated in three orthogonal orientations X, Y and Z in Low, Mid and High channels, it was determined that X orientation was the worst-case orientation.

LTE Band 12 /13, the spurious emission was investigated in three orthogonal orientations X, Y and Z in Low, Mid and High channels, it was determined that Y orientation in Mid channel was the worst-case configuration set for final test.

In addition, LTE Band 17 (Frequency range: 734-746 MHz) is covered by LTE Band 12 (Frequency range: 729-746 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 26, the spurious emission was investigated in three orthogonal orientations X, Y and Z in Low, Mid and High channels, it was determined that X orientation in Mid channel was the worst-case configuration set for final test.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	EP-TA300	R3KB5B01S1SE3	N/A
USB Data Caba	Samsung	N/A	N/A	N/A
Earphone	Samsung	N/A	N/A	N/A

I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RF Radiated Test)

I/O Cable List						
Cable No	Port	# of identic	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Earphone	1	USB	Un-shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	No


TEST SETUP

The EUT is continuously communicated to the call box during the tests

CONDUCTED TEST SETUP DIAGRAM

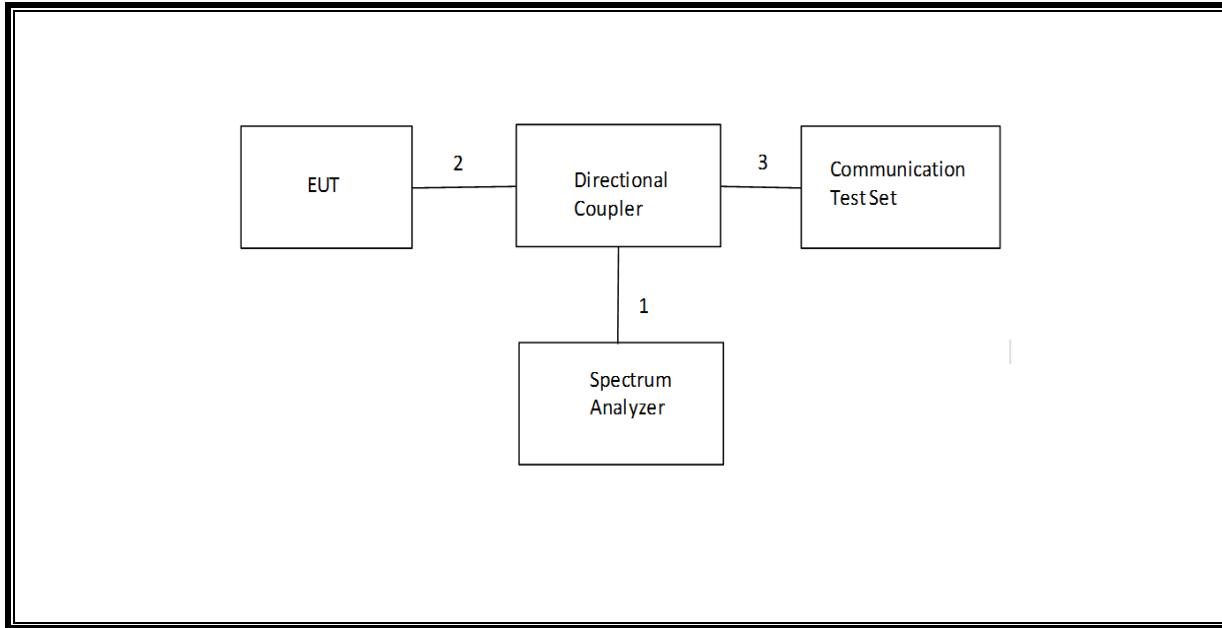

RADIATED TEST SETUP DIAGRAM

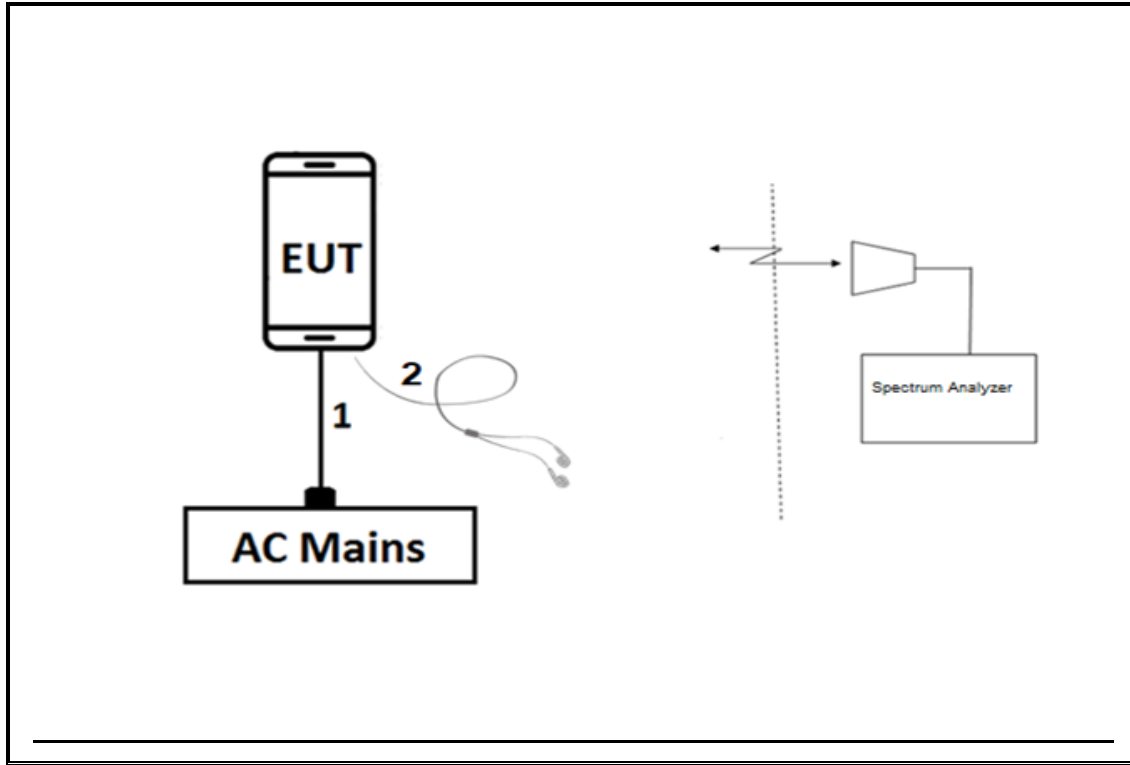

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Highpass Filter, 2.7 GHz	Micro-Circuits	H2G518G6	T772	07/05/19	07/05/18
Highpass Filter, 1 GHz	Micro-Tronics	HPM18129	T889	02/21/19	02/21/18
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM50114	T1852	07/16/19	07/16/18
Highpass Filter, 4GHz	Micro-Tronics	HPM13351	T1241	07/19/19	07/19/18
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T345	04/25/19	04/25/18
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T863	06/21/19	06/21/18
Antenna, Horn 18 - 26.5 GHz	ARA	MWH-1826/B	T477	06/16/2019	06/16/2018
RF Amplifier	MITEQ	AFS42-00101800-25-S-42	T1165	06/12/19	06/12/18
RF Amplifier	MITEQ	AFS42-00101800-25-S-42	T493	04/03/19	04/03/18
Directional Coupler	Mini-Circuits	ZUDC10-183+	T1136	06/18/19	06/18/18
Wideband Communication Test Set, Call Box	R&S	CMW500	T972	05/29/19	05/29/18
Wideband Communication Test Set, Call Box	R&S	CMW500	T1872	02/15/19	02/15/18
Wideband Communication Test Set, Call Box	R&S	CMW500	T949	02/21/19	02/21/18
Chamber, Environmental	Thermotron	SE-600-10-10	T80	02/22/19	02/22/18
Spectrum Analyzer	Agilent (Keysight) Technologies	E4446A	T146	07/18/19	07/18/18
Spectrum Analyzer	Agilent	CCS01178-1C	T200	09/11/19	09/11/18
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1450	02/05/19	02/05/18
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1466	04/16/19	04/16/18
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1454	01/08/19	01/08/18
DC power supply, 8 V @ 3 A or 15 V @ 2 A	Agilent / HP	E3610A	None	CNR	CNR
DC power supply 15V	Sprensen	XT15-4	T463	CNR	CNR
Power Meter	Keysight	N1911A	T1268	6/25/2019	6/25/2018
Power Meter Sensor	Keysight	N1911A	T1268	7/10/2019	7/10/2018

UL AUTOMATION SOFTWARE			
CLT Software	UL	UL RF	Ver 7.6, November 11, 2017
Power Measurement Software	UL	UL RF	Ver 2.2, June 2017

NOTES:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.