



CERTIFICATION TEST REPORT

Report Number. : 12563988-E1V2

Applicant : Samsung Electronics Co., Ltd.
129 Samsung-Ro, Yeongtong-Gu,
Suwon-Si, Gyeonggi-Do, 16677, Korea

Model : SM-G975N

FCC ID : A3LSMG975KOR

EUT Description : GSM/WCDMA/LTE phone with BT, DTS/UNII a/b/g/n/ac/11ax HE
20/40/80, ANT+ and NFC

Test Standard(s) : FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART F, H, L, and M
FCC CFR47 PART 90 SUBPART S

Date Of Issue:
JANUARY 31, 2019

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	1/30/2019	Initial Review	--
V2	1/31/2019	Updated Section 2.2	Dan Corona

TABLE OF CONTENTS

TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	8
2. INTRODUCTION OF TEST DATA REUSE	9
2.1. INTRODUCTION.....	9
2.2. DEVICES DIFFERENCES	9
2.3. SPOT CHECK VERIFICATION RESULTS SUMMARY	9
2.4. REFERENCE DETAIL.....	27
3. TEST METHODOLOGY	28
4. FACILITIES AND ACCREDITATION	28
5. CALIBRATION AND UNCERTAINTY	29
5.1. MEASURING INSTRUMENT CALIBRATION	29
5.2. SAMPLE CALCULATION.....	29
5.3. MEASUREMENT UNCERTAINTY	29
6. EQUIPMENT UNDER TEST	30
6.1. DESCRIPTION OF EUT.....	30
6.2. MAXIMUM OUTPUT POWER.....	30
6.3. SOFTWARE AND FIRMWARE	39
6.4. MAXIMUM ANTENNA GAIN	39
6.5. WORST-CASE CONFIGURATION AND MODE	40
6.6. DESCRIPTION OF TEST SETUP.....	41
7. TEST AND MEASUREMENT EQUIPMENT	44
8. RF OUTPUT POWER VERIFICATION	45
8.1. GSM	45
8.1.1. GSM850	46
8.1.2. GSM1900	46
8.2. WCDMA	47
8.2.1. WCDMA BAND5	51
8.2.2. WCDMA BAND2	52
8.2.3. WCDMA BAND4	53
8.3. LTE.....	54
8.3.1. LTE 2.....	56

8.3.2.	LTE 4.....	59
8.3.3.	LTE 5.....	62
8.3.4.	LTE 12.....	64
8.3.5.	LTE 13.....	66
8.3.6.	LTE 17.....	67
8.3.7.	LTE 25.....	68
8.3.8.	LTE 26 (FCC PART 90S).....	71
8.3.9.	LTE 26 (FCC PART 22).....	74
8.3.10.	LTE 41 (FCC).....	77
8.3.11.	LTE 66.....	79
9.	CONDUCTED TEST RESULTS.....	82
9.1.	OCCUPIED BANDWIDTH.....	82
9.1.1.	GSM.....	88
9.1.2.	WCDMA.....	89
9.1.3.	LTE BAND 2.....	90
9.1.4.	LTE BAND 4.....	92
9.1.5.	LTE BAND 5.....	94
9.1.6.	LTE BAND 12.....	96
9.1.7.	LTE BAND 13.....	98
9.1.8.	LTE BAND 17.....	99
9.1.9.	LTE BAND 25.....	100
9.1.10.	LTE BAND 26 (FCC PART 90S).....	102
9.1.11.	LTE BAND 26 (FCC PART 22).....	104
9.1.12.	LTE BAND 41.....	106
9.1.13.	LTE BAND 66.....	108
9.2.	BAND EDGE AND EMISSION MASK.....	110
9.2.1.	GSM850.....	112
9.2.2.	GSM1900.....	113
9.2.3.	WCDMA BAND5.....	114
9.2.4.	WCDMA BAND2.....	115
9.2.5.	WCDMA BAND4.....	116
9.2.6.	LTE BAND 2 BANDEDGE.....	117
9.2.7.	LTE BAND 4 BANDEDGE.....	129
9.2.8.	LTE BAND 5 BANDEDGE.....	141
9.2.9.	LTE BAND 12 BANDEDGE.....	149

9.2.10.	LTE BAND 13 BANDEDGE	157
9.2.11.	LTE BAND 17 BANDEDGE	160
9.2.12.	LTE BAND 25 BANDEDGE	164
9.2.13.	LTE BAND 26 EMISSION MASK (FCC PART 90S)	176
9.2.14.	LTE BAND 26 BANDEDGE (FCC PART 22)	184
9.2.15.	LTE BAND 41 ADJACENT CHANNEL POWER	193
9.2.16.	LTE BAND 66 BANDEDGE	201
9.3.	OUT OF BAND EMISSIONS	212
9.3.1.	GSM850	213
9.3.2.	GSM1900	215
9.3.3.	WCDMA BAND5	217
9.3.4.	WCDMA BAND2	219
9.3.5.	WCDMA BAND4	221
9.3.6.	LTE BAND 2.....	223
9.3.7.	LTE BAND 4.....	229
9.3.8.	LTE BAND 5.....	235
9.3.9.	LTE BAND 12.....	239
9.3.10.	LTE BAND 13	243
9.3.11.	LTE BAND 17	245
9.3.12.	LTE BAND 25	247
9.3.13.	LTE BAND 26	253
9.3.14.	LTE BAND 41	258
9.3.15.	LTE BAND 66	262
9.4.	FREQUENCY STABILITY	268
9.4.1.	GSM	269
9.4.2.	WCDMA	271
9.4.3.	LTE BAND 2.....	274
9.4.4.	LTE BAND 4.....	275
9.4.5.	LTE BAND 5.....	276
9.4.6.	LTE BAND 12.....	277
9.4.7.	LTE BAND 13.....	278
9.4.8.	LTE BAND 17.....	279
9.4.9.	LTE BAND 25.....	280
9.4.10.	LTE BAND 26 (FCC PART 90S)	281
9.4.11.	LTE BAND 26 (FCC PART 22).....	282

9.4.12.	LTE BAND 41 (FCC)	283
9.4.13.	LTE BAND 66	284
9.5.	PEAK TO AVERAGE RATIO	285
9.5.1.	GSM	286
9.5.2.	WCDMA	287
9.5.3.	LTE BAND 2	288
9.5.4.	LTE BAND 4	290
9.5.5.	LTE BAND 5	292
9.5.6.	LTE BAND 12	294
9.5.7.	LTE BAND 13	296
9.5.8.	LTE BAND 17	297
9.5.9.	LTE BAND 25	298
9.5.10.	LTE BAND 26 (FCC PART 90S)	300
9.5.11.	LTE BAND 26 (FCC PART 22)	302
9.5.12.	LTE BAND 41	304
9.5.13.	LTE BAND 66	306
10.	RADIATED TEST RESULTS	308
10.1.	EFFECTIVE RADIATED POWER ERP/EIRP	308
10.1.1.	GSM	316
10.1.2.	WCDMA	317
10.1.3.	LTE Band 2	318
10.1.4.	LTE Band 4	318
10.1.5.	LTE Band 5	319
10.1.6.	LTE Band 12	319
10.1.7.	LTE Band 13	320
10.1.8.	LTE Band 17	320
10.1.9.	LTE Band 25	321
10.1.10.	LTE Band 26 (FCC PART 90S)	322
10.1.11.	LTE Band 26 (FCC PART 22)	322
10.1.12.	LTE Band 41	323
10.1.13.	LTE Band 66	323
10.2.	FIELD STRENGTH OF SPURIOUS RADIATION	324
10.2.1.	GSM	325
10.2.2.	WCDMA	329
10.2.3.	LTE BAND 2	335

10.2.4.	LTE BAND 4	337
10.2.5.	LTE BAND 5	339
10.2.6.	LTE BAND 12	341
10.2.7.	LTE BAND 13	343
10.2.8.	LTE BAND 17	345
10.2.9.	LTE BAND 25	347
10.2.10.	LTE BAND 26 Part 90S	349
10.2.11.	LTE BAND 26 Part 22	351
10.2.12.	LTE BAND 41	353
10.2.13.	LTE BAND 66	355
10.2.14.	SPOT CHECK DATA HARMONICS AND SPURIOUS EMISSIONS (CERAMIC)	357
10.2.15.	SPOT CHECK DATA HARMONICS AND SPURIOUS EMISSIONS – SM-G975N (CERAMIC) 369	
11.	APPENDIX A: PRE-SCAN DATA FOR 15B RECEIVER MODE.....	382
11.1.	SM-G975N (GLASS).....	382
11.1.1.	LTE Band 12.....	382
11.1.2.	LTE Band 13.....	386
11.1.3.	LTE Band 26.....	390
11.1.	SM-G975N (CERAMIC)	394
11.1.1.	LTE Band 12.....	394
11.1.2.	LTE Band 13.....	398
11.1.3.	LTE Band 26.....	402
12.	SETUP PHOTOS.....	406

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	SAMSUNG ELECTRONICS CO., LTD. 129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI, GYEONGGI-DO, 16677, KOREA	
Model	SM-G975F/DS and SM-G975F	
FCC ID	A3LSMG975KOR	
EUT Description	GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC/11AX HE 20/40/80, ANT+ AND NFC	
Serial Number	R38KA0L98YA (Conducted); R38KA0L95XE, R38KA0L973P (Glass Radiated); R38KA092MAP. R38KA092LJB (Ceramic Radiated) – (ORIGINAL) R38KA092MAP. R38KA092LJB (SM-G975N Glass Radiated); R38KA092MAP. R38KA092LJB (SM-G975N Ceramic Radiated) - (SPOTCHECK)	
Date Tested	OCTOBER 23, 2018 to JANUARY 25, 2019 (ORIGINAL) DECEMBER 10, 2018 to JANUARY 25, 2019 (SPOTCHECK) JANUARY 29, 2019 (RX APPENDIX)	
Applicable Standards	FCC CFR 47 PART 22H, 24E, 27F,H,L,M and 90S	
Test Results	Complies	
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.</p> <p>This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.</p>		
Approved & Released For UL Verification Services Inc. By:	Reviewed By:	
		
Dan Corona Operations Leader Consumer Technology Division UL Verification Services Inc.	Steven Tran Project Engineer Consumer Technology Division UL Verification Services Inc.	

2. INTRODUCTION OF TEST DATA REUSE

2.1. INTRODUCTION

According to the manufacturer, FCC ID: A3LSMG975F and FCC ID: A3LSMG975KOR licensed radios are electrically identical. The FCC ID: A3LSMG975F test data shall remain representative of FCC ID: A3LSMG975KOR.

The applicant takes full responsibility that the test data as referenced in this section represents compliance for this FCC ID.

2.2. DIFFERENCE

Samsung Electronics Co. Ltd. declares that A3LSMG975KOR does not support LTE Band 7, Band 38 and LTE UL CA in USA.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMG975F remains representative of FCC ID: A3LSMG975KOR. The test data of FCC ID: A3LSMG975F being submitted for this application to cover WWAN features.

2.3. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device A3LSMG975KOR(Glass and Ceramic) for radiated harmonic spurious. The data from the application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the summary below.

Comparison of two models, upper deviation is within 3dB range and all tests are under FCC Technical Limits.

SPOT CHECK DATA – SM-G975N (GLASS)

A3LSMG970KOR SPOT CHECK RESULTS							
Technology	Mode	Test Item	Channel	Measured Frequency	Original Model	Spot check model	Delta (dB)
					SM-G975F (Glass)	SM-G975N (Glass)	
					A3LSMG970F	A3LSMG970KOR	
					Peak	Peak	
GSM	GPRS 850	RSE	High	1.698GHz	-47.04	-52.35	-5.31
	GPRS 1900	RSE	Mid	7.487GHz	-50.77	-57.02	-6.25
	EGPRS 850	RSE	High	3.298GHz	-56.18	-58.99	-2.81
	EGPRS 1900	RSE	Low	7.348GHz	-50.14	-57.24	-7.1
WCDMA	REL99 B5	RSE	Low	3.308GHz	-58.98	-59.4	-0.42
	REL99 B4	RSE	Mid	5.197GHz	-55.25	-56.17	-0.92
	REL99 B2	RSE	Mid	7.516GHz	-51.93	-54.4	-2.47
	HSDPA B5	RSE	Low	3.31GHz	-57.74	-59.48	-1.74
	HSDPA B4	RSE	Mid	5.198GHz	-56.07	-56.88	-0.81
	HSDPA B2	RSE	High	7.63GHz	-55.12	-54.04	1.08

A3LSMG975KOR SPOT CHECK RESULTS							
Technology	Mode	Test Item	Channel	Measured Frequency	Original Model	Spot check model	Delta (dB)
					SM-G975F (Glass)	SM-G975N (Glass)	
					A3LSMG970F	A3LSMG970KOR	
					Peak	Peak	
LTE 2	QPSK @ highest BW	RSE	Low	10.865GHz	-43.04	-53.43	-10.39
	16QAM @ highest BW	RSE	High	12.702GHz	-42.52	-48.18	-5.66
LTE 4	QPSK @ 20MHz BW	RSE	High	5.238GHz	-53.86	-53.72	0.14
	16QAM @ 20MHz BW	RSE			-55.38	-53.98	1.4
LTE 5	QPSK @ highest BW	RSE	Mid	6.28GHz	-49.95	-57.57	-7.62
	16QAM @ highest BW	RSE	Mid	3.33GHz	-54.65	-59.53	-4.88
LTE 12	QPSK @ highest BW	RSE	Mid	2.828GHz	-57.85	-58.61	-0.76
	16QAM @ highest BW	RSE	Low	2.817GHz	-58.88	-57.32	1.56
LTE 13	QPSK @ highest BW	RSE	Mid	3.129GHz	-57.06	-58.43	-1.37
	16QAM @ highest BW	RSE		3.13GHz	-59.58	-58.49	1.09
LTE 17	QPSK @ highest BW	RSE	Low	2.832GHz	-59.84	-57.56	2.28
	16QAM @ highest BW	RSE	Low	2.835GHz	-59.69	-59.23	0.46
LTE 25	QPSK @ highest BW	RSE	Low	7.401GHz	-43.33	-56.06	-12.73
	16QAM @ highest BW	RSE		7.396GHz	-46.03	-56.44	-10.41
LTE 26 (Part 90)	QPSK @ highest BW	RSE	Low	3.262GHz	-55.92	-55.26	0.66
	16QAM @ highest BW	RSE	Low	3.265GHz	-56.64	-56.76	-0.12
LTE 26 (Part 22)	QPSK @ highest BW	RSE	High	3.371GHz	-56.87	-57.47	-0.6
	16QAM @ highest BW	RSE	Mid	3.326GHz	-57.3	-58.21	-0.91

A3LSMG975KOR SPOT CHECK RESULTS							
Technology	Mode	Test Item	Channel	Measured Frequency	Original Model	Spot check model	Delta (dB)
					SM-G975F (Glass)	SM-G975N (Glass)	
					A3LSMG970F	A3LSMG970KOR	
					Peak	Peak	
LTE 41	QPSK @ highest BW	RSE	Low	10.005GHz	-44.41	-48.87	-4.46
	16QAM @ highest BW	RSE			-47.24	-51.78	-4.54
LTE 66	QPSK @ highest BW	RSE	High	7.082GHz	-55.85	-57.43	-1.58
	16QAM @ highest BW	RSE	High	7.084GHz	-55.18	-57.21	-2.03

HARMONICS AND SPURIOUS EMISSIONS

GSM

Company:	Samsung
Project #:	12563988
Date:	12/28/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	GPRS 850 High Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
848.8 MHz												
1	1.698	-58.13	Pk	29.5	-33.3	10	-51.93	-13	-38.93	0-360	149	H
2	1.698	-57.85	Pk	29.5	-33.3	9.3	-52.35	-13	-39.35	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	12/31/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	GPRS 1900 Mid Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1880 MHz												
1	7.487	-73.39	Pk	36.1	-26.9	7.4	-56.79	-13	-43.79	0-360	149	H
2	7.487	-73.62	Pk	36.1	-26.9	7.4	-57.02	-13	-44.02	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	12/28/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	EGPRS 850 High Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
848.8 MHz												
1	3.298	-70.59	Pk	32.9	-31.1	9.8	-58.99	-13	-45.99	0-360	149	H
2	3.298	-70.34	Pk	32.9	-31.1	9.9	-58.64	-13	-45.64	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	12/31/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	EGPRS 1900 Low Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1850.2 MHz												
1	7.348	-73.44	Pk	36	-27.3	7.5	-57.24	-13	-44.24	0-360	149	H
2	7.348	-73.2	Pk	36	-27.3	7.6	-56.9	-13	-43.9	0-360	149	V

WCDMA

Company:	Samsung
Project #:	12563988
Date:	12/28/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	REL 99 B5 Low Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
826.4 MHz												
1	3.308	-71	Pk	32.9	-30.9	9.6	-59.4	-13	-46.4	0-360	149	H
2	3.308	-71.1	Pk	32.9	-30.9	9.9	-59.2	-13	-46.2	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	12/27/18
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	REL 99 B4 Mid Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1732.6 MHz												
1	5.195	-70.99	Pk	34.7	-29.8	9.1	-56.99	-13	-43.99	0-360	149	H
2	5.196	-70.07	Pk	34.7	-29.8	9	-56.17	-13	-43.17	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	12/27/18
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	REL 99 B2 Mid Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1880 MHz												
1	7.518	-70.8	Pk	36.2	-27.3	7.5	-54.4	-13	-41.4	0-360	149	H
2	7.519	-69.26	Pk	36.2	-27.3	7.5	-52.86	-13	-39.86	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	12/28/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	HSDPA B5 Low Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
826.4 MHz												
1	3.331	-71.88	Pk	32.9	-31	8.8	-61.18	-13	-48.18	0-360	149	H
2	3.331	-70.48	Pk	32.9	-31	9.1	-59.48	-13	-46.48	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	12/27/18
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	HSDPA B4 Mid Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1732.6 MHz												
2	5.193	-70.58	Pk	34.7	-29.7	8.7	-56.88	-13	-43.88	0-360	149	V
1	5.203	-70.02	Pk	34.7	-29.8	9.3	-55.82	-13	-42.82	0-360	149	H

Company:	Samsung
Project #:	12563988
Date:	12/27/18
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	HSDPA B2 High Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1907.6 MHz												
1	7.634	-70.84	Pk	36.4	-27	7.4	-54.04	-13	-41.04	0-360	149	H
2	7.635	-67.5	Pk	36.4	-27	7.3	-50.8	-13	-37.8	0-360	149	V

LTE BAND 2

Company:	Samsung
Project #:	12563988
Date:	12/26/18
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	LTE 2 QPSK 20MHz Low Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LTE Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1860 MHz												
2	10.865	-75.94	Pk	38	-22.8	7.3	-53.44	-13	-40.44	0-360	149	V
1	10.866	-75.93	Pk	38	-22.8	7.3	-53.43	-13	-40.43	0-360	149	H

Company:	Samsung
Project #:	12563988
Date:	12/26/18
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	LTE 2 16QAM 20MHz High Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LTE Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1900 MHz												
2	12.702	-74.58	Pk	39.2	-22.1	9.3	-48.18	-13	-35.18	0-360	149	V
1	12.704	-75.09	Pk	39.2	-22.2	9.1	-48.99	-13	-35.99	0-360	149	H

LTE BAND 4

Company:	Samsung
Project #:	12563988
Date:	12/17/18
Test Engineer:	10649
Configuration:	EUT+ Support Equipment
Mode:	LTE 4 QPSK 20MHz High Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1745 MHz												
4	5.236	-72.24	Pk	34.2	-27	10.6	-54.44	-	-	0-360	149	H
3	5.237	-71.92	Pk	34.2	-27	11	-53.72	-	-	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	12/17/18
Test Engineer:	10649
Configuration:	EUT+ Support Equipment
Mode:	LTE 4 16QAM 20MHz High Channel
Chamber #:	Chamber A

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1745 MHz												
1	5.238	-72.18	Pk	34.3	-27.1	11	-53.98	-	-	0-360	149	V
2	5.239	-72.18	Pk	34.3	-27.1	11	-53.98	-	-	0-360	149	V

LTE BAND 5

Company:	Samsung
Project #:	12563988
Date:	12/26/18
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	LTE 5 QPSK 10MHz Mid Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LTE Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
836.5 MHz												
1	6.282	-71.55	Pk	35.6	-29.2	6.8	-58.35	-13	-45.35	0-360	149	H
2	6.282	-70.77	Pk	35.6	-29.2	6.8	-57.57	-13	-44.57	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	12/26/18
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	LTE 5 16QAM 10MHz Mid Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LTE Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
836.5 MHz												
2	3.33	-70.63	Pk	32.9	-31	9.2	-59.53	-13	-46.53	0-360	149	V
1	3.331	-69.64	Pk	32.9	-31	8.8	-58.94	-13	-45.94	0-360	149	H

LTE BAND 12

Company:	Samsung
Project #:	12563988
Date:	12/26/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 12 QPSK 10MHz Mid Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
707.5MHz												
1	2.828	-69.21	Pk	32.5	-31.8	9.9	-58.61	-13	-45.61	0-360	149	H
2	2.829	-69.57	Pk	32.5	-31.8	9.6	-59.27	-13	-46.27	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	12/26/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 12 16QAM 10MHz Low Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
704MHz												
1	2.817	-67.62	Pk	32.5	-31.8	9.6	-57.32	-13	-44.32	0-360	149	H
2	2.82	-69.06	Pk	32.5	-31.8	9.2	-59.16	-13	-46.16	0-360	149	V

LTE BAND 13

Company:	Samsung
Project #:	12563988
Date:	12/26/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 13 QPSK 5MHz Mid Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
782MHz												
2	3.129	-70.73	Pk	33.2	-30.9	10	-58.43	-13	-45.43	0-360	149	V
1	3.13	-69.9	Pk	33.2	-30.9	9.5	-58.1	-13	-45.1	0-360	149	H

Company:	Samsung
Project #:	12563988
Date:	12/26/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 13 16QAM 5MHz Mid Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
782MHz												
2	3.13	-70.79	Pk	33.2	-30.9	10	-58.49	-13	-45.49	0-360	149	V
1	3.131	-69.78	Pk	33.2	-30.9	9.5	-57.98	-13	-44.98	0-360	149	H

LTE BAND 17

Company:	Samsung
Project #:	12563988
Date:	12/26/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 17 QPSK 10MHz Low Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
709MHz												
1	3.832	-69.46	Pk	33.4	-30.8	9.3	-57.56	-13	-44.56	0-360	149	H
2	3.833	-70.3	Pk	33.4	-30.8	9.5	-58.2	-13	-45.2	0-360	149	V

Company:	Samsung
Project #:	12563708
Date:	12/20/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 17 16QAM 10MHz Low Channel
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
709MHz												
1	2.835	-69.33	Pk	32.5	-31.9	9.5	-59.23	-13	-46.23	0-360	149	H
2	2.837	-69.25	Pk	32.5	-32	9.2	-59.55	-13	-46.55	0-360	149	V

LTE BAND 25

Company:	Samsung
Project #:	12563988
Date:	12/27/18
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	LTE 25 QPSK 20MHz Low Channel
Chamber #:	Chamber B

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1882.5MHz												
2	7.398	-72.71	Pk	36.2	-27.2	7.5	-56.21	-13	-43.21	0-360	149	V
1	7.4	-72.16	Pk	36.2	-27.3	7.2	-56.06	-13	-43.06	0-360	149	H

Company:	Samsung
Project #:	12563988
Date:	12/27/18
Test Engineer:	19498
Configuration:	EUT+ Support Equipment
Mode:	LTE 25 16QAM 20MHz Low Channel
Chamber #:	Chamber B

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1882.5MHz												
1	7.396	-72.84	Pk	36.1	-27.1	7.4	-56.44	-13	-43.44	0-360	149	H
2	7.401	-70.92	Pk	36.2	-27.4	7.3	-54.82	-13	-41.82	0-360	149	V

LTE BAND 26 Part 90

Company:	Samsung
Project #:	12563988
Date:	1/24/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 26 QPSK 15MHz Low Channel
Chamber #:	Chamber B

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
821.5MHz												
1	3.262	-67.76	Pk	33	-30.9	10.4	-55.26	-13	-42.26	0-360	149	H
2	3.262	-69.96	Pk	33	-30.9	9.9	-57.96	-13	-44.96	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	1/24/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 26 16QAM 15MHz Low Channel
Chamber #:	Chamber B

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
821.5MHz												
2	3.264	-69.66	Pk	33	-30.8	9.7	-57.76	-13	-44.76	0-360	149	V
1	3.265	-69.16	Pk	33	-30.9	10.3	-56.76	-13	-43.76	0-360	149	H

LTE BAND 26 Part 22

Company:	Samsung
Project #:	12563988
Date:	12/27/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 26 QPSK 15MHz High Channel
Chamber #:	Chamber B

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
841.5MHz												
1	3.372	-69.56	Pk	32.9	-31	9.4	-58.26	-13	-45.26	0-360	149	H
2	3.372	-69.17	Pk	32.9	-31	9.8	-57.47	-13	-44.47	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	12/27/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 26 16QAM 15MHz Mid Channel
Chamber #:	Chamber B

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
836.5MHz												
2	3.319	-69.51	Pk	32.9	-31	9.4	-58.21	-13	-45.21	0-360	149	V
1	3.33	-68.9	Pk	32.9	-31	8.9	-58.1	-13	-45.1	0-360	149	H

LTE BAND 41

Company:	Samsung
Project #:	12563988
Date:	12/27/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 41 QPSK 10MHz Low Channel
Chamber #:	Chamber B

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2501MHz												
1	10.004	-70.57	Pk	37.4	-23.8	8.1	-48.87	-25	-23.87	0-360	149	H
2	10.004	-69.13	Pk	37.4	-23.8	8	-47.53	-25	-22.53	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	12/27/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 41 16QAM 10MHz Low Channel
Chamber #:	Chamber B

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2501MHz												
1	10.005	-73.38	Pk	37.4	-23.8	8	-51.78	-25	-26.78	0-360	149	H
2	10.008	-70.93	Pk	37.4	-23.8	8	-49.33	-25	-24.33	0-360	149	V

LTE BAND 66

Company:	Samsung
Project #:	12563988
Date:	12/21/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 66 QPSK 20MHz High Channel
Chamber #:	Chamber B

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1770MHz												
1	7.082	-73.13	Pk	36	-27.7	7.4	-57.43	-13	-44.43	0-360	149	H
2	7.082	-71.53	Pk	36	-27.7	7.4	-55.83	-13	-42.83	0-360	149	V

Company:	Samsung
Project #:	12563988
Date:	12/21/18
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	LTE 66 16QAM 20MHz High Channel
Chamber #:	Chamber B

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1770MHz												
1	7.084	-72.91	Pk	36	-27.8	7.5	-57.21	-13	-44.21	0-360	149	H
2	7.084	-72.22	Pk	36	-27.8	7.6	-56.42	-13	-43.42	0-360	149	V

2.4. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID	Type Grant/ Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title/Section
PCE	A3LSMG975F	Grant	12563708-E1	Test	FCC Report WWAN / All sections except Appendix A
DSS	A3LSMG975F	Grant	12563708-E2	Test	FCC Report BT / All sections
DTS	A3LSMG975F	Grant	12563708-E3	Test	FCC Report BLE / All sections
	A3LSMG975F	Grant	12563708-E4	Test	FCC Report DTS WLAN / All sections
NII	A3LSMG975F	Grant	12563708-E5	Test	FCC Report UNII WLAN / All sections except DFS
DXX	A3LSMG975F	Grant	12563708-E7	Test	FCC Report NFC / All sections
			12563708-E8	Test	FCC Report ANT+ / All sections
DCD	A3LSMG975F	Grant	12563708-E9	Test	FCC Report Wireless Charging / All sections

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26:2015, ANSI C63.4:2014, TIA-603-E, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, Part 90, FCC KDB 971168 D01 v3r1.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd
<input checked="" type="checkbox"/> Chamber A (ISED:2324B-1)	<input type="checkbox"/> Chamber D (ISED:22541-1)	<input type="checkbox"/> Chamber I (ISED:2324A-5)
<input checked="" type="checkbox"/> Chamber B (ISED:2324B-2)	<input type="checkbox"/> Chamber E (ISED:22541-2)	<input type="checkbox"/> Chamber J (ISED:2324A-6)
<input type="checkbox"/> Chamber C (ISED:2324B-3)	<input type="checkbox"/> Chamber F (ISED:22541-3)	<input type="checkbox"/> Chamber K (ISED:2324A-1)
	<input type="checkbox"/> Chamber G (ISED:22541-4)	<input type="checkbox"/> Chamber L (ISED:2324A-3)
	<input type="checkbox"/> Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$
$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Final Voltage (dBuV)} = \text{Measured Voltage (dBuV)} + \text{Cable Loss (dB)} + \text{Limiter Factor (dB)} + \text{LISN Insertion Loss.}$$
$$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$$

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE phone with BT, DTS/UNII a/b/g/n/ac/11ax HE 20/40/80, ANT+ and NFC. The model SM-G975F was used for final testing and is representative of the test results in this report.

6.2. MAXIMUM OUTPUT POWER

ERP/EIRP LIMIT

FCC: §2.1046, §22.913, §24.232, §27.50, §90.635

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015/ TIA-603-E Clause 2.2.17

KDB 971168 D01Section 5.6

KDB 412172 D01

$ERP/EIRP = P_{Meas} + GT - LC$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

The transmitter has a maximum average conducted and ERP / EIRP output powers as follows:

GSM MODES

Part 22 850MHz								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
824.2-848.8	GPRS	33.5	0.70	7.0	32.05	1.603	244.8	245KGXW
	EGPRS	27.0			25.55	0.359	236.5	237KG7W

Part 24 1900MHz								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1850.2-1909.8	GPRS	30.6	2.30	2.0	32.92	1.959	245.1	245KGXW
	EGPRS	26.0			28.30	0.676	239.06	239KG7W

WCDMA MODE

Part 22 Band 5								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
826.4-846.6	REL 99	24.4	0.70	7.0	22.95	0.197	4160	4M16F9W
	HSDPA	23.3			21.85	0.153	4170	4M17F9W

Part 24 Band 2								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1852.4-1907.6	REL 99	23.2	2.30	2.0	25.50	0.355	4170	4M17F9W
	HSDPA	23.2			25.50	0.355	4160	4M16F9W

Part 27 Band 4								
Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1712.4-1752.6	REL 99	22.9	1.20	1.0	24.10	0.257	4160	4M16F9W
	HSDPA	22.8			24.00	0.251	4160	4M16F9W

LTE BAND 2

Part 24								
EIRP Limit (W)		2.00						
Antenna Gain (dBi)		2.30						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	1850.7	1909.3	23.1	25.40	0.347	1080	1M08G7W
	16QAM			22.4	24.70	0.295	1090	1M09D7W
	64QAM			21.2	23.50	0.224		
3.0	QPSK	1851.5	1908.5	23.1	25.40	0.347	2690	2M69G7W
	16QAM			22.4	24.70	0.295	2690	2M69D7W
	64QAM			21.3	23.60	0.229		
5.0	QPSK	1852.5	1907.5	23.0	25.30	0.339	4510	4M51G7W
	16QAM			22.4	24.70	0.295	4510	4M51D7W
	64QAM			21.3	23.60	0.229		
10.0	QPSK	1855.0	1905.0	23.1	25.40	0.347	8960	8M96G7W
	16QAM			22.6	24.90	0.309	8970	8M97D7W
	64QAM			21.3	23.60	0.229		
15.0	QPSK	1857.5	1902.5	23.3	25.60	0.363	13430	13M4G7W
	16QAM			22.5	24.80	0.302	13420	13M4D7W
	64QAM			21.4	23.70	0.234		
20.0	QPSK	1860.0	1900.0	23.2	25.50	0.355	17890	17M9G7W
	16QAM			22.5	24.80	0.302	17910	17M9D7W
	64QAM			21.5	23.80	0.240		

LTE BAND 4

Part 27								
EIRP Limit (W)		1.00						
Antenna Gain (dBi)		1.20						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	1710.7	1754.3	23.7	24.90	0.309	1080	1M08G7W
	16QAM			22.9	24.10	0.257	1090	1M09D7W
	64QAM			21.9	23.10	0.204		
3.0	QPSK	1711.5	1753.5	23.7	24.90	0.309	2690	2M69G7W
	16QAM			23.0	24.20	0.263	2700	2M70D7W
	64QAM			21.8	23.00	0.200		
5.0	QPSK	1712.5	1752.5	23.6	24.80	0.302	4520	4M52G7W
	16QAM			22.9	24.10	0.257	4500	4M50D7W
	64QAM			22.0	23.20	0.209		
10.0	QPSK	1715.0	1750.0	23.7	24.90	0.309	8950	8M95G7W
	16QAM			23.0	24.20	0.263	8970	8M97D7W
	64QAM			21.9	23.10	0.204		
15.0	QPSK	1717.5	1747.5	23.7	24.90	0.309	13400	13M4G7W
	16QAM			23.0	24.20	0.263	13390	13M4D7W
	64QAM			22.0	23.20	0.209		
20.0	QPSK	1720.0	1745.0	23.7	24.90	0.309	17870	17M9G7W
	16QAM			23.2	24.40	0.275	17860	17M9D7W
	64QAM			22.0	23.20	0.209		

LTE BAND 5

Part 22H									
ERP Limit (W)		7.00							
Antenna Gain (dBi)		0.70							
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator	
1.4	QPSK	824.7	848.3	24.8	23.35	0.216	1080	1M08G7W	
	16QAM			22.6	21.15	0.130	1090	1M09D7W	
	64QAM			21.5	20.05	0.101			
3.0	QPSK	825.5	847.5	25.0	23.55	0.226	2690	2M69G7W	
	16QAM			22.9	21.45	0.140	2690	2M69D7W	
	64QAM			21.4	19.95	0.099			
5.0	QPSK	826.5	846.5	24.9	23.45	0.221	4520	4M52G7W	
	16QAM			22.6	21.15	0.130	4510	4M51D7W	
	64QAM			21.7	20.25	0.106			
10.0	QPSK	829.0	844.0	24.7	23.25	0.211	8950	8M95G7W	
	16QAM			22.5	21.05	0.127	8950	8M95D7W	
	64QAM			21.5	20.05	0.101			

LTE BAND 12

Part 27									
ERP Limit (W)		3.00							
Antenna Gain (dBi)		-0.50							
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator	
1.4	QPSK	699.7	715.3	23.9	21.25	0.133	1090	1M09G7W	
	16QAM			23.3	20.65	0.116	1090	1M09D7W	
	64QAM			22.2	19.55	0.090			
3.0	QPSK	700.5	714.5	24.1	21.45	0.140	2690	2M69G7W	
	16QAM			23.5	20.85	0.122	2700	2M70D7W	
	64QAM			22.2	19.55	0.090			
5.0	QPSK	701.5	713.5	24.1	21.45	0.140	4490	4M49G7W	
	16QAM			23.3	20.65	0.116	4510	4M51D7W	
	64QAM			22.2	19.55	0.090			
10.0	QPSK	704.0	711.0	23.8	21.15	0.130	8960	8M96G7W	
	16QAM			23.2	20.55	0.114	8950	8M95D7W	
	64QAM			22.0	19.35	0.086			

LTE BAND 13

Part 27								
ERP Limit (W)		3.00						
Antenna Gain (dBi)		-1.50						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator
5.0	QPSK	779.5	784.5	23.9	20.25	0.106	4500	4M50G7W
	16QAM			23.3	19.65	0.092	4510	4M51D7W
	64QAM			23.2	19.55	0.090		
10.0	QPSK	782.0	782.0	23.8	20.15	0.104	8950	8M95G7W
	16QAM			22.3	18.65	0.073	8960	8M96D7W
	64QAM			22.2	18.55	0.072		

LTE BAND 17

Part 27								
ERP Limit (W)		3.00						
Antenna Gain (dBi)		-0.50						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator
5.0	QPSK	706.5	713.5	23.9	21.25	0.133	4510	4M51G7W
	16QAM			22.5	19.85	0.097	4500	4M50D7W
	64QAM			22.3	19.65	0.092		
10.0	QPSK	709.0	711.0	23.8	21.15	0.130	8960	8M96G7W
	16QAM			22.6	19.95	0.099	8960	8M96D7W
	64QAM			22.3	19.65	0.092		

LTE BAND 25

Part 24								
EIRP Limit (W)		2.00						
Antenna Gain (dBi)		2.30						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	1850.7	1914.3	23.5	25.80	0.380	1090	1M09G7W
	16QAM			22.8	25.10	0.324	1090	1M09D7W
	64QAM			21.4	23.70	0.234		
3.0	QPSK	1851.5	1913.5	23.5	25.80	0.380	2690	2M69G7W
	16QAM			22.9	25.20	0.331	2690	2M69D7W
	64QAM			21.4	23.70	0.234		
5.0	QPSK	1852.5	1912.5	23.5	25.80	0.380	4510	4M51G7W
	16QAM			22.7	25.00	0.316	4520	4M52D7W
	64QAM			21.5	23.80	0.240		
10.0	QPSK	1855.0	1910.0	23.6	25.90	0.389	8960	8M96G7W
	16QAM			22.8	25.10	0.324	8960	8M96D7W
	64QAM			21.5	23.80	0.240		
15.0	QPSK	1857.5	1907.5	23.7	26.00	0.398	13420	13M4G7W
	16QAM			22.8	25.10	0.324	13390	13M4D7W
	64QAM			21.6	23.90	0.245		
20.0	QPSK	1860.0	1905.0	23.7	26.00	0.398	17920	17M9G7W
	16QAM			22.9	25.20	0.331	17920	17M9D7W
	64QAM			21.7	24.00	0.251		

LTE BAND 26 (FCC Part 90S)

Part 90S								
ERP Limit (W)		100.00						
Antenna Gain (dBi)		0.80						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	814.7	823.3	24.0	22.65	0.184	1090	1M09G7W
	16QAM			23.5	22.15	0.164	1080	1M08D7W
	64QAM			22.2	20.85	0.122		
3.0	QPSK	815.5	822.5	24.0	22.65	0.184	2700	2M70G7W
	16QAM			23.1	21.75	0.150	2700	2M70D7W
	64QAM			22.0	20.65	0.116		
5.0	QPSK	816.5	821.5	24.0	22.65	0.184	4520	4M52G7W
	16QAM			23.2	21.85	0.153	4530	4M53D7W
	64QAM			22.0	20.65	0.116		
10.0	QPSK	819.0	819.0	23.9	22.55	0.180	8960	8M96G7W
	16QAM			23.3	21.95	0.157	8950	8M95D7W
	64QAM			22.1	20.75	0.119		
15.0	QPSK	821.5	821.5	24.2	22.85	0.193	13420	13M4G7W
	16QAM			23.2	21.85	0.153	13400	13M4D7W
	64QAM			21.8	20.45	0.111		

LTE BAND 26 (FCC Part 22)

Part 22										
ERP Limit (W)		7.00								
Antenna Gain (dBi)		0.70								
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator		
1.4	QPSK	824.7	848.3	24.0	22.55	0.180	1080	1M08G7W		
	16QAM			23.3	21.85	0.153	1090	1M09D7W		
	64QAM			22.4	20.95	0.124				
3.0	QPSK	825.5	847.5	23.9	22.45	0.176	2690	2M69G7W		
	16QAM			23.3	21.85	0.153	2670	2M67D7W		
	64QAM			22.4	20.95	0.124				
5.0	QPSK	826.5	846.5	23.9	22.45	0.176	4500	4M50G7W		
	16QAM			23.4	21.95	0.157	4490	4M49D7W		
	64QAM			22.1	20.65	0.116				
10.0	QPSK	829.0	844.0	23.9	22.45	0.176	8960	8M96G7W		
	16QAM			23.3	21.85	0.153	8970	8M97D7W		
	64QAM			22.1	20.65	0.116				
15.0	QPSK	831.5	841.5	24.0	22.55	0.180	13370	13M4G7W		
	16QAM			23.5	22.05	0.160	13370	13M4D7W		
	64QAM			22.2	20.75	0.119				

LTE BAND 41

Part 27										
EIRP Limit (W)		2.00								
Antenna Gain (dBi)		-1.40								
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator		
5.0	QPSK	2498.5	2687.5	23.9	22.50	0.178	4510	4M51G7W		
	16QAM			21.7	20.30	0.107	4500	4M50D7W		
	64QAM			20.9	19.50	0.089				
10.0	QPSK	2501.0	2685.0	24.0	22.60	0.182	9000	9M00G7W		
	16QAM			22.2	20.80	0.120	8930	8M93D7W		
	64QAM			20.9	19.50	0.089				
15.0	QPSK	2503.5	2682.5	24.0	22.60	0.182	13410	13M4G7W		
	16QAM			22.0	20.60	0.115	13380	13M4D7W		
	64QAM			21.0	19.60	0.091				
20.0	QPSK	2506.0	2680.0	24.0	22.60	0.182	17860	17M9G7W		
	16QAM			22.0	20.60	0.115	17900	17M9D7W		
	64QAM			21.4	20.00	0.100				

LTE BAND 66

Part 27								
EIRP Limit (W)		1.00						
Antenna Gain (dBi)		1.20						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	1710.7	1779.3	23.2	24.40	0.275	1080	1M08G7W
	16QAM			22.4	23.60	0.229	1080	1M08D7W
	64QAM			21.5	22.70	0.186		
3.0	QPSK	1711.5	1778.5	23.2	24.40	0.275	2680	2M68G7W
	16QAM			22.4	23.60	0.229	2690	2M69D7W
	64QAM			21.3	22.50	0.178		
5.0	QPSK	1712.5	1777.5	23.2	24.40	0.275	4500	4M50G7W
	16QAM			22.3	23.50	0.224	4510	4M51D7W
	64QAM			21.4	22.60	0.182		
10.0	QPSK	1715.0	1775.0	23.1	24.30	0.269	8950	8M95G7W
	16QAM			22.4	23.60	0.229	8970	8M97D7W
	64QAM			21.3	22.50	0.178		
15.0	QPSK	1717.5	1772.5	23.2	24.40	0.275	13430	13M4G7W
	16QAM			22.6	23.80	0.240	13410	13M4D7W
	64QAM			21.5	22.70	0.186		
20.0	QPSK	1720.0	1770.0	23.2	24.40	0.275	17900	17M9G7W
	16QAM			22.7	23.90	0.245	17890	17M9D7W
	64QAM			21.3	22.50	0.178		

6.3. SOFTWARE AND FIRMWARE

The test utility software used during testing was G975F.001 (SM-G975F) and G975N.001(SM-G975N).

6.4. MAXIMUM ANTENNA GAIN

Please see table below:

LTE Bands	Antenna Gain (dBi)
GSM850, 824-849MHz	0.7
GSM1900, 1850-1910MHz	2.3
WCDMA Band 2, 1850-1910 MHz	2.3
WCDMA Band 4, 1710-1755 MHz	1.2
WCDMA Band 5, 824-849 MHz	0.7
LTE BAND 2, 1850 - 1910 MHz	2.3
LTE BAND 4, 1710 - 1755 MHz	1.2
LTE BAND 5, 824 - 849 MHz	0.7
LTE BAND 12, 699 - 716 MHz	-0.5
LTE BAND 13, 777 - 787 MHz	-1.5
LTE BAND 17, 704 - 716 MHz	-0.5
LTE BAND 25, 1850 - 1915 MHz	2.3
LTE BAND 26 (FCC PART 22), 824 - 849 MHz	0.7
LTE BAND 26 (FCC PART 90S), 814 - 824 MHz	0.8
LTE BAND 41 (FCC), 2496 - 2690 MHz	-1.4
LTE BAND 66, 1710 - 1780 MHz	1.2

Note: the antenna gain listed above is the highest between glass and ceramic samples.

6.5. WORST-CASE CONFIGURATION AND MODE

WORST-CASE CONFIGURATION AND MODE FOR FINAL TEST

This device may be formed with two different exterior materials: Glass and Ceramic. Glass model was set for full test and additional spot check verification was done with Ceramic model for radiated harmonic spurious and radiated band-edge as documented.

The EUT supports LTE Bands of:

Band 2, Band 4, Band 5, Band 12, Band 13, Band 17, Band 25, Band 26, Band 41 and Band 66.

The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM, and 64QAM modulations. All testing was performed using QPSK, and 16QAM modulations to represent the worst case.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, & Z, and it was determined that Y-Axis for 700MHz and 1880MHz, X-Axis for 800MHz, and X-Axis for 2500MHz with AC/DC Adapter and headset was worst-case orientation.

All radios that can be transmitted simultaneously have been evaluated for radiated for all possible combinations of transmission and found to be in compliance.

For the Part15B receiver mode (Appendix A):

LTE Band 26 (Frequency range: 859-894 MHz) cover GSM850, WCDMA B5, and LTE Band 5 due to overlapping frequency range. The middle channel was set to test and spurious emissions was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation.

For LTE B12 , the middle channel was set to test and the spurious emissions was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation.

For LTE B13 , the middle channel was set to test and the spurious emissions was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation.

In addition, LTE Band 17 (Frequency range: 734-746 MHz) is covered by LTE Band 12 (Frequency range: 729-746 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	EP-TA300	R3KB5B01S1SE3	N/A
USB Data Cabe	Samsung	N/A	N/A	N/A
Earphone	Samsung	N/A	N/A	N/A

I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RF Radiated Test)

I/O Cable List						
Cable No	Port	# of identic	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Earphone	1	USB	Un-shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	No


TEST SETUP

The EUT is continuously communicated to the call box during the tests

CONDUCTED TEST SETUP DIAGRAM

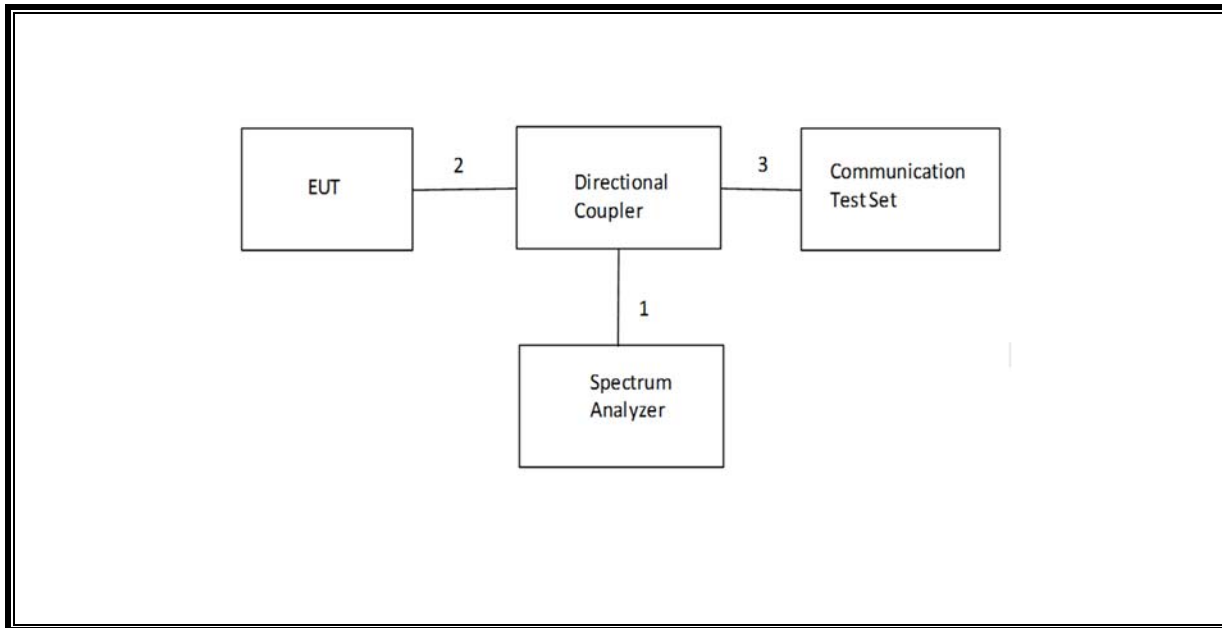

RADIATED TEST SETUP DIAGRAM

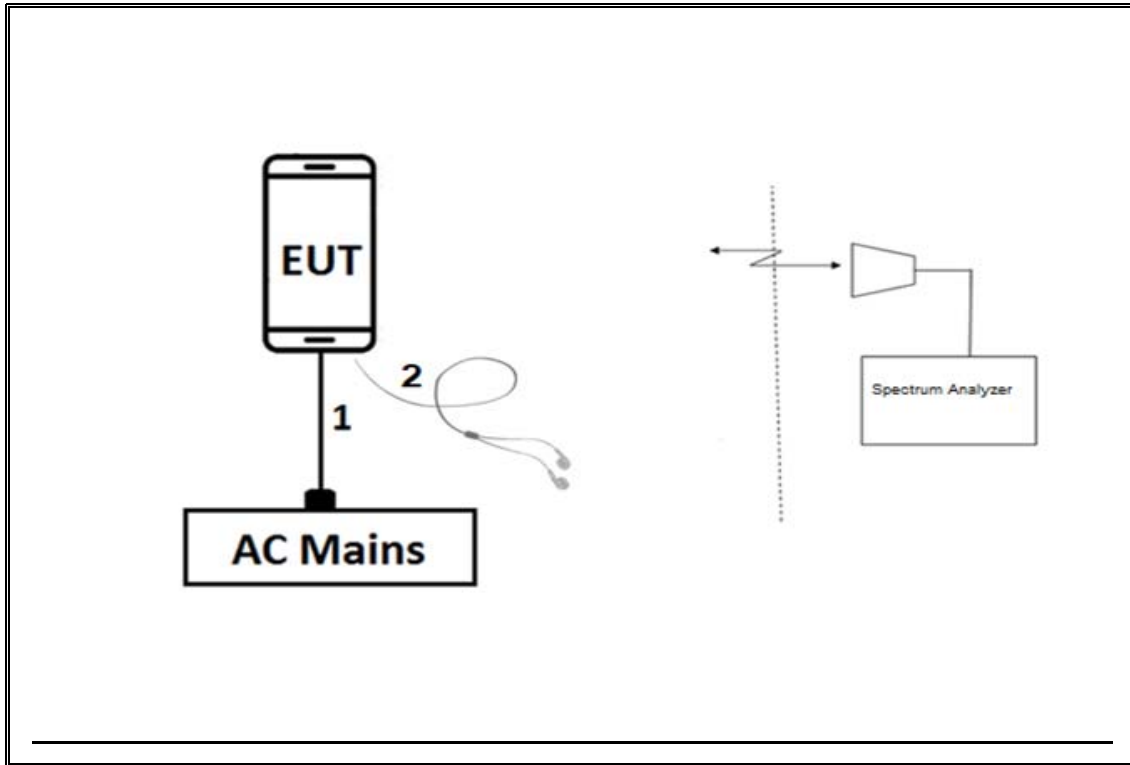

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Highpass Filter, 2.7 GHz	Micro-Circuits	H2G518G6	T772	07/05/19	07/05/18
Highpass Filter, 1 GHz	Micro-Tronics	HPM18129	T889	02/21/19	02/21/18
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM50114	T1852	07/16/19	07/16/18
Highpass Filter, 4GHz	Micro-Tronics	HPM13351	T1241	07/19/19	07/19/18
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T345	04/25/19	04/25/18
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T863	06/21/19	06/21/18
Antenna, Horn 18 - 26.5 GHz	ARA	MWH-1826/B	T477	06/16/2019	06/16/2018
RF Amplifier	MITEQ	AFS42-00101800-25-S-42	T1165	06/12/19	06/12/18
RF Amplifier	MITEQ	AFS42-00101800-25-S-42	T493	04/03/19	04/03/18
Directional Coupler	Mini-Circuits	ZUDC10-183+	T1136	06/18/19	06/18/18
Wideband Communication Test Set, Call Box	R&S	CMW500	T972	05/29/19	05/29/18
Wideband Communication Test Set, Call Box	R&S	CMW500	T1872	02/15/19	02/15/18
Wideband Communication Test Set, Call Box	R&S	CMW500	T949	02/21/19	02/21/18
Chamber, Environmental	Thermotron	SE-600-10-10	T80	02/22/19	02/22/18
Spectrum Analyzer	Agilent (Keysight) Technologies	E4446A	T146	07/18/19	07/18/18
Spectrum Analyzer	Agilent	CCS01178-1C	T200	09/11/19	09/11/18
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1450	02/05/19	02/05/18
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1466	04/16/19	04/16/18
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1454	01/08/19	01/08/18
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T908	01/29/20	01/29/19
DC power supply, 8 V @ 3 A or 15 V @ 2 A	Agilent / HP	E3610A	None	CNR	CNR
DC power supply 15V	Sprensen	XT15-4	T463	CNR	CNR
Power Meter	Keysight	N1911A	T1268	6/25/2019	6/25/2018
Power Meter Sensor	Keysight	N1911A	T1268	7/10/2019	7/10/2018

UL AUTOMATION SOFTWARE			
CLT Software	UL	UL RF	Ver 7.6, November 11, 2017
Power Measurement Software	UL	UL RF	Ver 2.2, June 2017

NOTES:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.