



CERTIFICATION TEST REPORT

Report Number. : 4789230288-E5V1

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-G981B/DS, SM-G981B

FCC ID : A3LSMG981B

EUT Description : GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+,
NFC and WPT

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

December 23, 2019

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



ACCREDITED

Testing Laboratory

TL-637

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	12/23/19	Initial issue	Hyunsik Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION.....	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY	7
4.4. DECISION RULE	7
5. EQUIPMENT UNDER TEST.....	8
5.1. DESCRIPTION OF EUT.....	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. WORST-CASE CONFIGURATION AND MODE	9
5.5. DESCRIPTION OF TEST SETUP	10
6. TEST AND MEASUREMENT EQUIPMENT	12
7. REFERENCE MEASUREMENT RESULTS.....	13
7.1. ON TIME AND DUTY CYCLE RESULTS.....	13
8. MEASUREMENT METHODS	14
9. SUMMARY TABLE	15
10. ANTENNA PORT TEST RESULTS.....	16
10.1. 6 dB BANDWIDTH.....	16
10.2. OUTPUT POWER.....	19
10.3. AVERAGE POWER.....	22
10.4. PSD	23
10.5. OUT-OF-BAND EMISSIONS	26
11. RADIATED TEST RESULTS.....	33
11.1. LIMITS AND PROCEDURE	33
11.2. TRANSMITTER ABOVE 1 GHz	35
11.2.1. 1Mbps MODE	35
11.2.2. 2Mbps MODE	45
11.3. WORST-CASE BELOW 1 GHz.....	55

12. AC POWER LINE CONDUCTED EMISSIONS57

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+, NFC and WPT
MODEL NUMBER: SM-G981B/DS, SM-G981B
SERIAL NUMBER: 397147485c1f7ece, 39989048ab1f7ece (CONDUCTED)
R3CMA0D84RA (RADIATED);
DATE TESTED: OCT 31, 2019 – NOV 11, 2019;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Hyunsik Yun
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/wp-content/uploads/2017/05/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.35 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.49 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.82 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.49 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+, NFC and WPT. This test report addresses the DTS (BLE) operational mode.

This report covers the Samsung models SM-G981B/DS and SM-G981B. These models are identical in hardware except SM-G981B has single SIM tray. With some pre-scan, model SM-G981B/DS was set for final test.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	1Mbps	Peak	7.462	5.57
		Average	6.785	4.77
	2Mbps	Peak	8.604	7.25
		Average	7.451	5.56

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of -3.80 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Note : All radiated and power line conducted tests were performed attached with travel adapter for the worst case condition mode.

Power verification

The Output Power of all data rate are all investigated, the 1Mbps(37 pkt) and 2Mbps(37 pkt) power is the worst case for symbol rate. All tests were performed in these two modes.

Symbol Rate [Ms/s]	Mode	Frequency [MHz]	Conducted Burst Avg [dBm]	Symbol Rate [Ms/s]	Mode	Frequency [MHz]	Conducted Burst Avg [dBm]
1	1Mbps (37 pkt)	2402	6.075	2	2Mbps (37 pkt)	2402	6.845
		2440	6.785			2440	7.451
		2480	5.720			2480	6.025
	1Mbps (255 pkt)	2402	5.868		2Mbps (255 pkt)	2402	6.761
		2440	6.553			2440	7.350
		2480	5.459			2480	5.964

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37M5WSB411SE3	N/A
Data Cable	SAMSUNG	EP-DG977	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software in hidden menu exercised the EUT to enable BLE mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

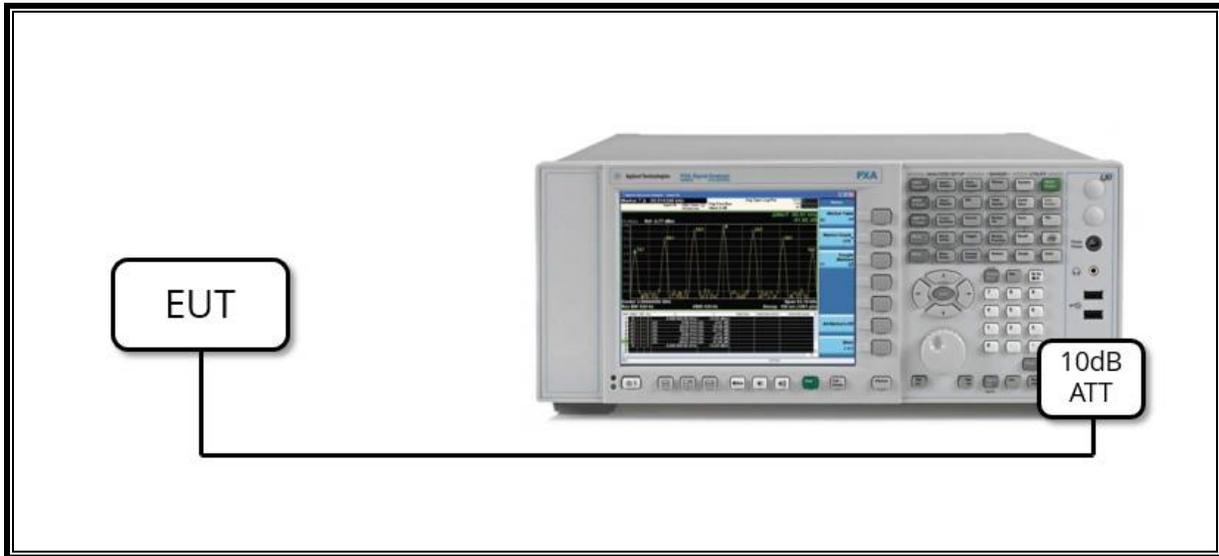

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

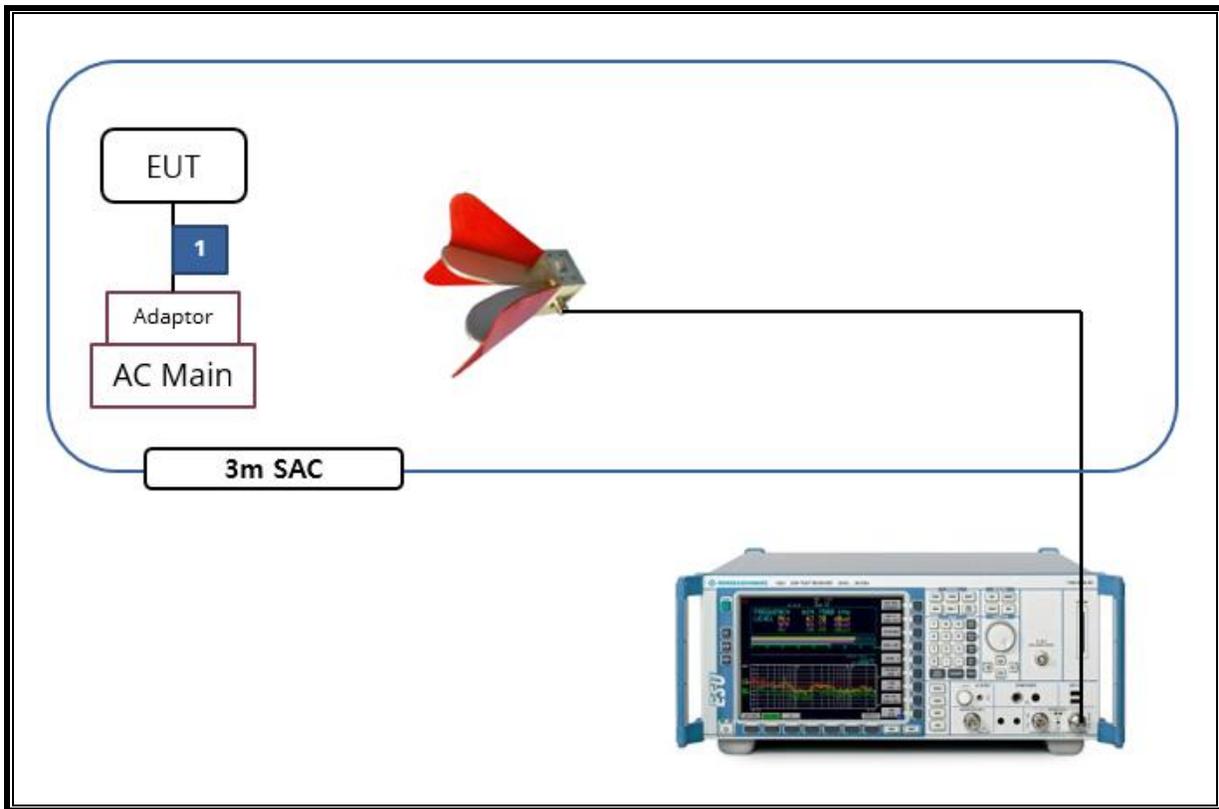

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-04-20
Antenna, Horn, 18 GHz	ETS	3115	00167211	08-04-20
Antenna, Horn, 18 GHz	ETS	3115	00161451	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168724	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168717	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00205959	08-04-20
Antenna, Horn, 40 GHz	ETS	3116C	00166155	08-14-20
Antenna, Horn, 40 GHz	ETS	3116C	00168645	10-02-21
Preamplifier	ETS	3116C-PA	00168841	08-08-20
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-05-20
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-05-20
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-05-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-06-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-06-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-06-20
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-06-20
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-06-20
Spectrum Analyzer, 43.5 GHz	R&S	FSW43	104089	08-06-20
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-09-20
Attenuator	PASTERNAK	PE7087-10	A001	08-08-20
Attenuator	PASTERNAK	PE7087-10	A008	08-08-20
Attenuator	PASTERNAK	PE7004-10	2	08-06-20
Attenuator	PASTERNAK	PE7087-10	A009	08-08-20
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-06-20
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-06-20
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-05-20
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-05-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-06-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-06-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-06-20
LISN	R&S	ENV-216	101837	08-09-20
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-02-21
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. REFERENCE MEASUREMENT RESULTS

7.1. ON TIME AND DUTY CYCLE RESULTS

LIMITS

None: for reporting purposes only.

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
2400MHz Bands						
BLE 1M	0.377	0.625	0.604	60.4%	2.19	2.650
BLE 2M	0.194	0.625	0.310	31.0%	5.09	5.168



8. MEASUREMENT METHODS

6 dB BW : KDB 558074 D01 v05r02, Section 8.2.

OUTPUT POWER : KDB 558074 D01 v05r02, Section 8.3.1.1

POWER SPECTRAL DENSITY : KDB 558074 D01 v05r02, Section 8.4.

Out-of-band Emissions (Conducted) : KDB 558074 D01 v05r02, Section 8.5.

Out-of-band Emissions in Non-restricted Bands: KDB 558074 D01 v05r02, Section 8.5.

Out-of-band Emissions in Restricted Bands : KDB 558074 D01 v05r02, Section 8.6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2

9. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.247 (a)(2)	Occupied Band width (6dB)	>500KHz	Conducted	Pass
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass
15.247 (b)(3)	TX conducted output power	<30dBm		Pass
15.247 (e)	PSD	<8dBm		Pass
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	Pass

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to section 11.8 in ANSI C63.10(2013): The transmitter output is connected to a spectrum analyzer with the RBW set to 100kHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS

- 1Mbps


Channel	Frequency [MHz]	6 dB Bandwidth [kHz]	Minumun Limit [kHz]
Low	2 402	663.65	500.00
Mid	2 440	673.21	500.00
High	2 480	679.93	500.00
Worst		663.65	500.00

- 2Mbps


Channel	Frequency [MHz]	6 dB Bandwidth [kHz]	Minumun Limit [kHz]
Low	2 402	1192.94	500.00
Mid	2 440	1210.39	500.00
High	2 480	1201.70	500.00
Worst		1192.94	500.00

6 dB BANDWIDTH PLOTS

- 1Mbps

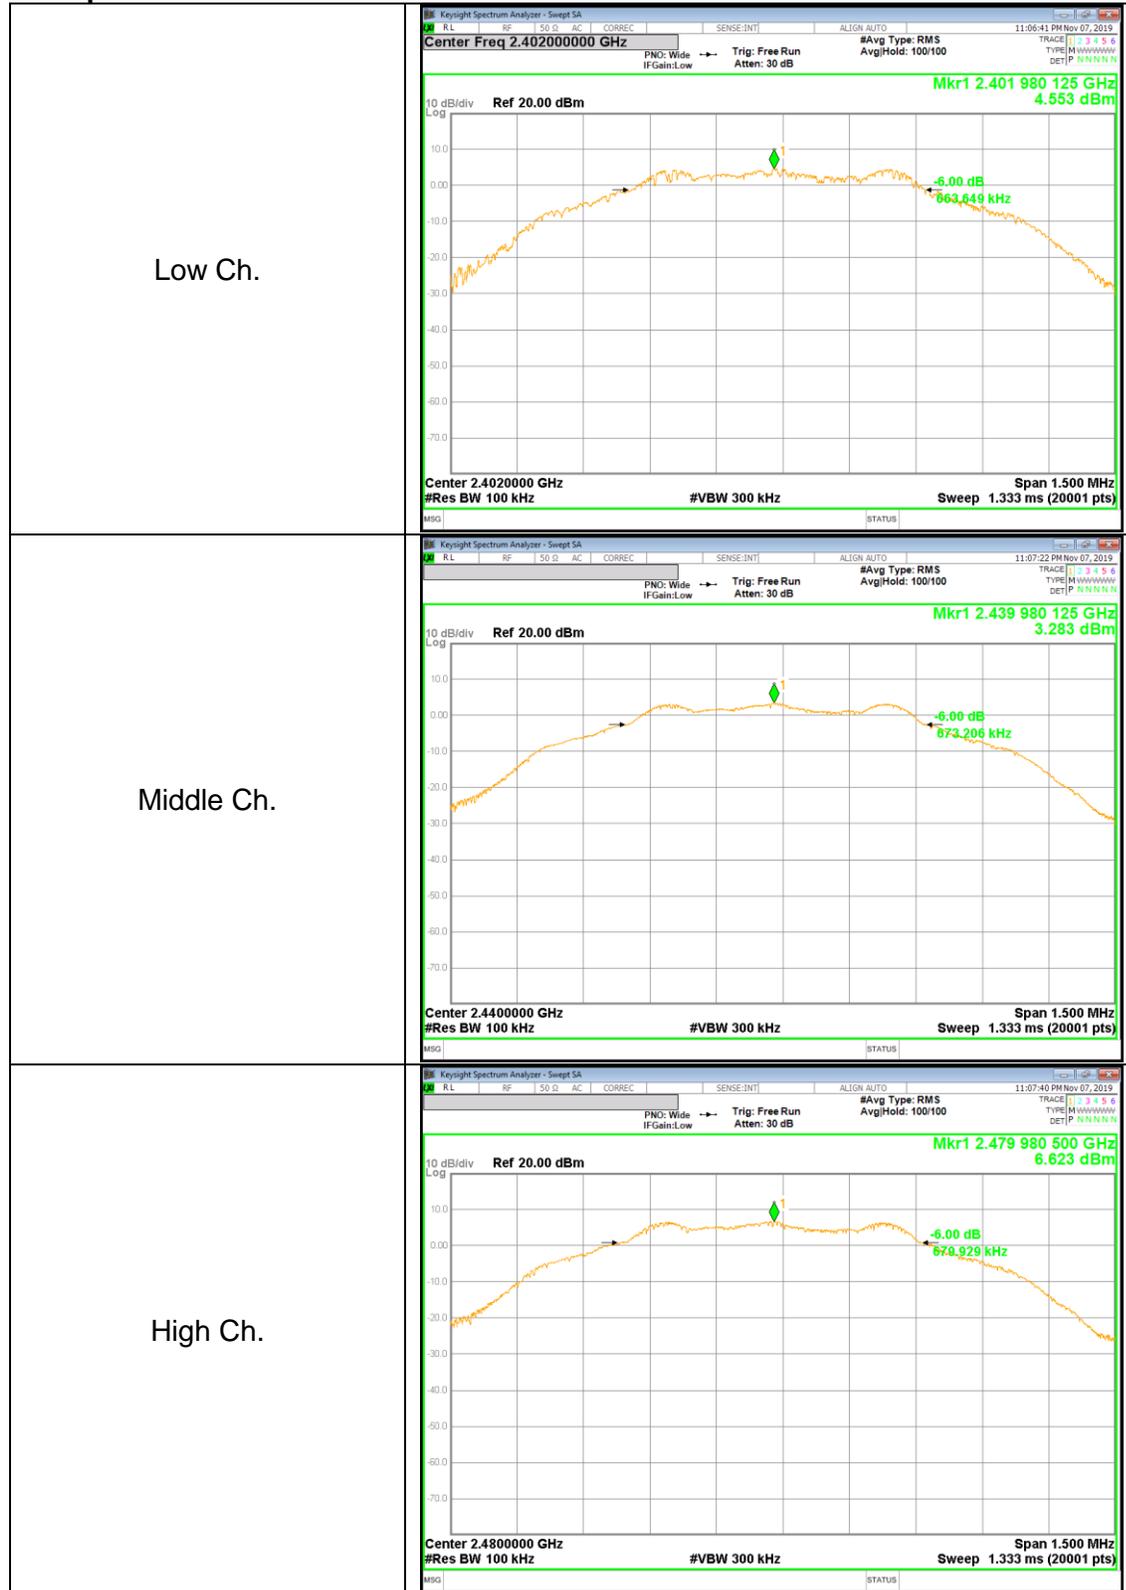

- 2Mbps

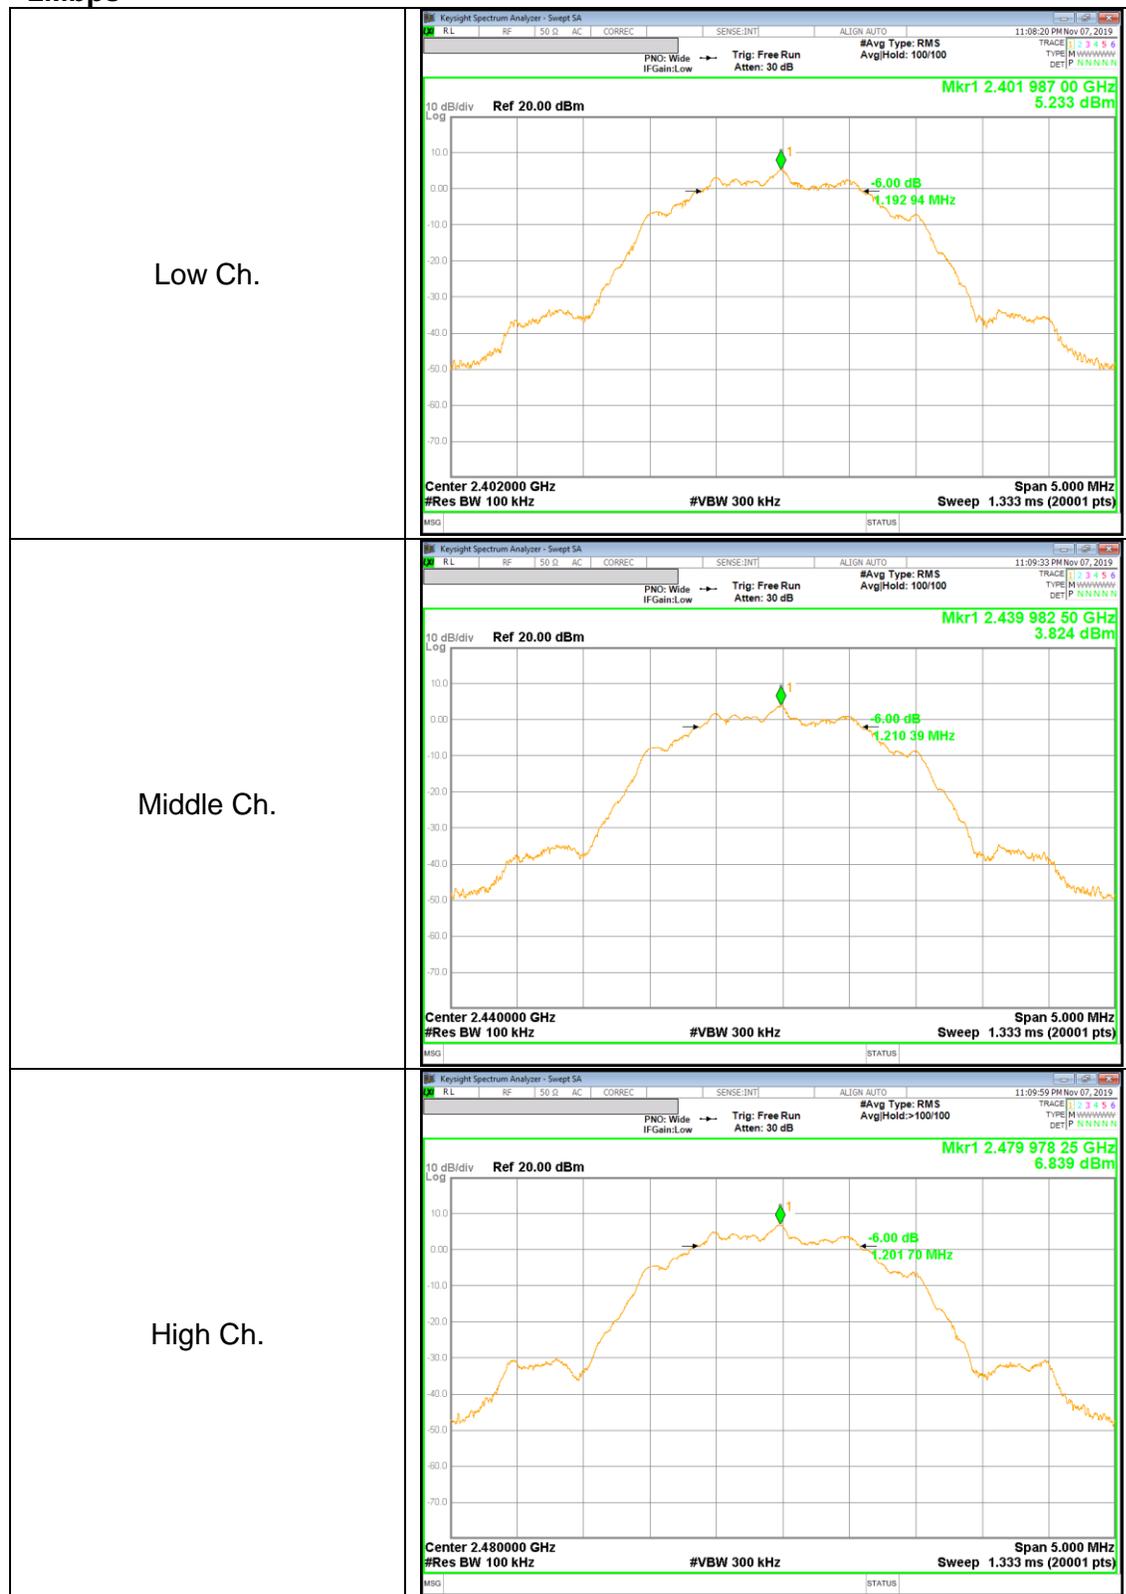

10.2. OUTPUT POWER

LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

Peak power is measured using ANSI C63.10(2013) under section 11.9.1.1 utilizing spectrum analyzer.

RESULTS

- 1Mbps


Channel	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin [dB]
Low	2 402	6.943	30.000	-23.057
Mid	2 440	7.462	30.000	-22.538
High	2 480	6.334	30.000	-23.666
Worst		7.462	30.000	-22.538

- 2Mbps


Channel	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin [dB]
Low	2 402	7.967	30.000	-22.033
Mid	2 440	8.604	30.000	-21.396
High	2 480	6.921	30.000	-23.079
Worst		8.604	30.000	-21.396

OUTPUT POWER PLOTS

- 1Mbps

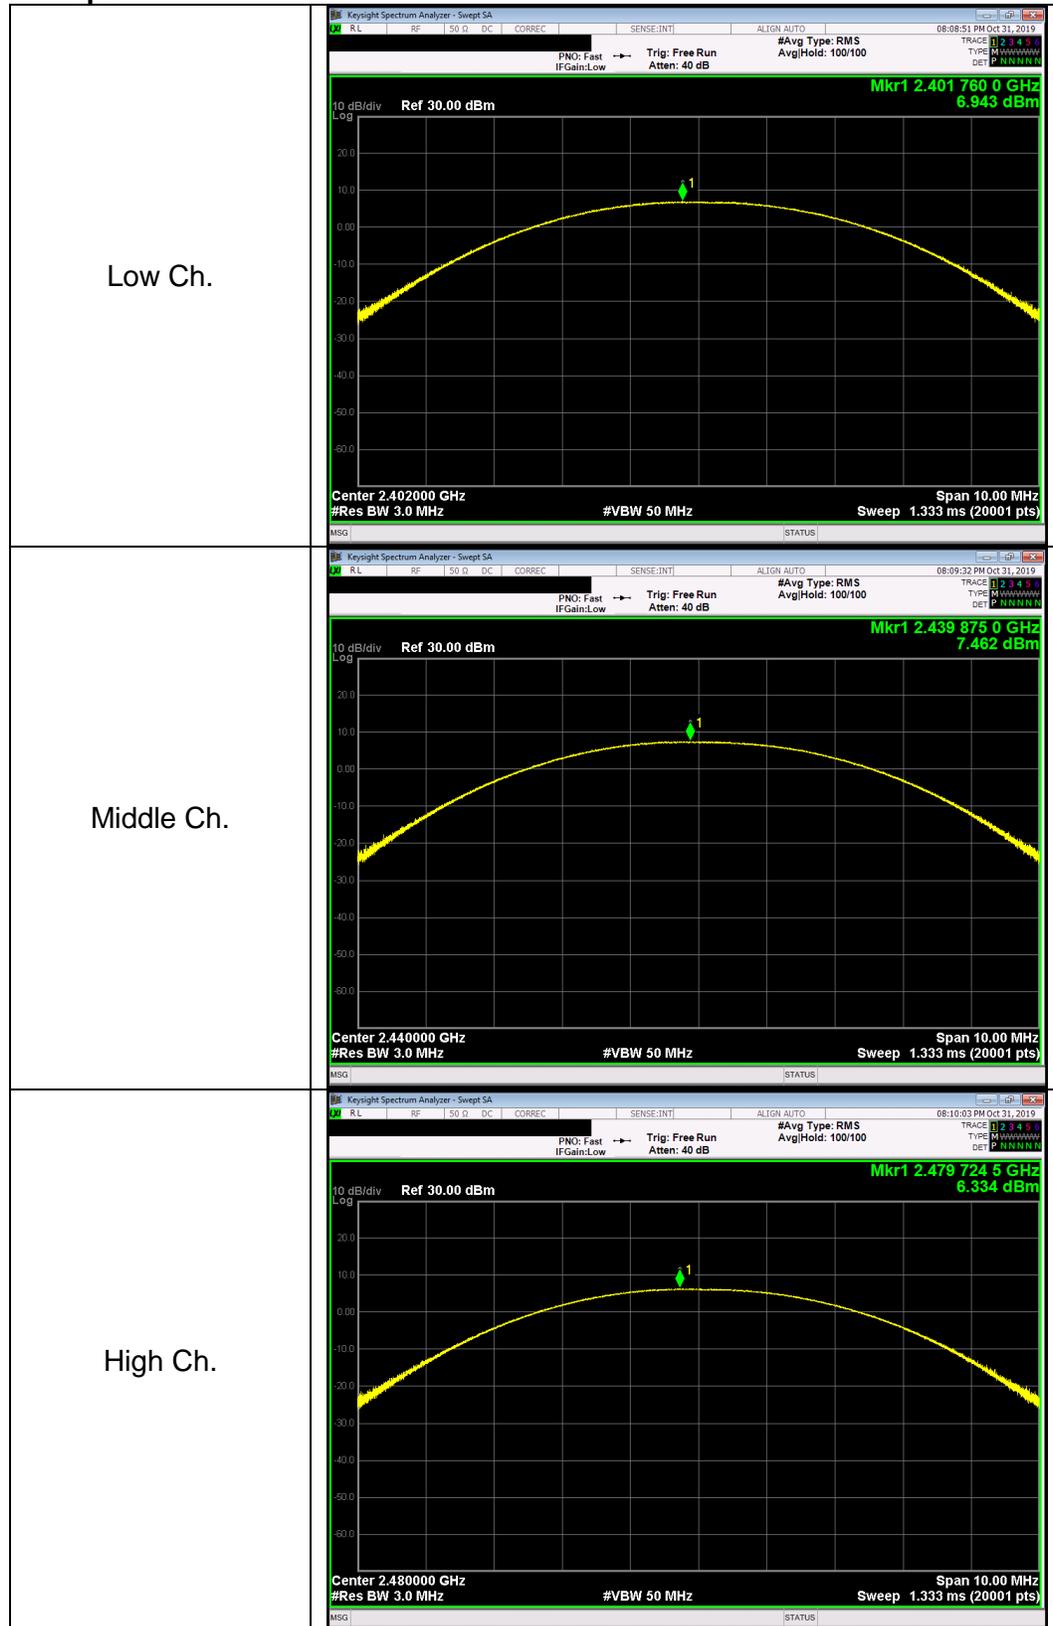

- 2Mbps

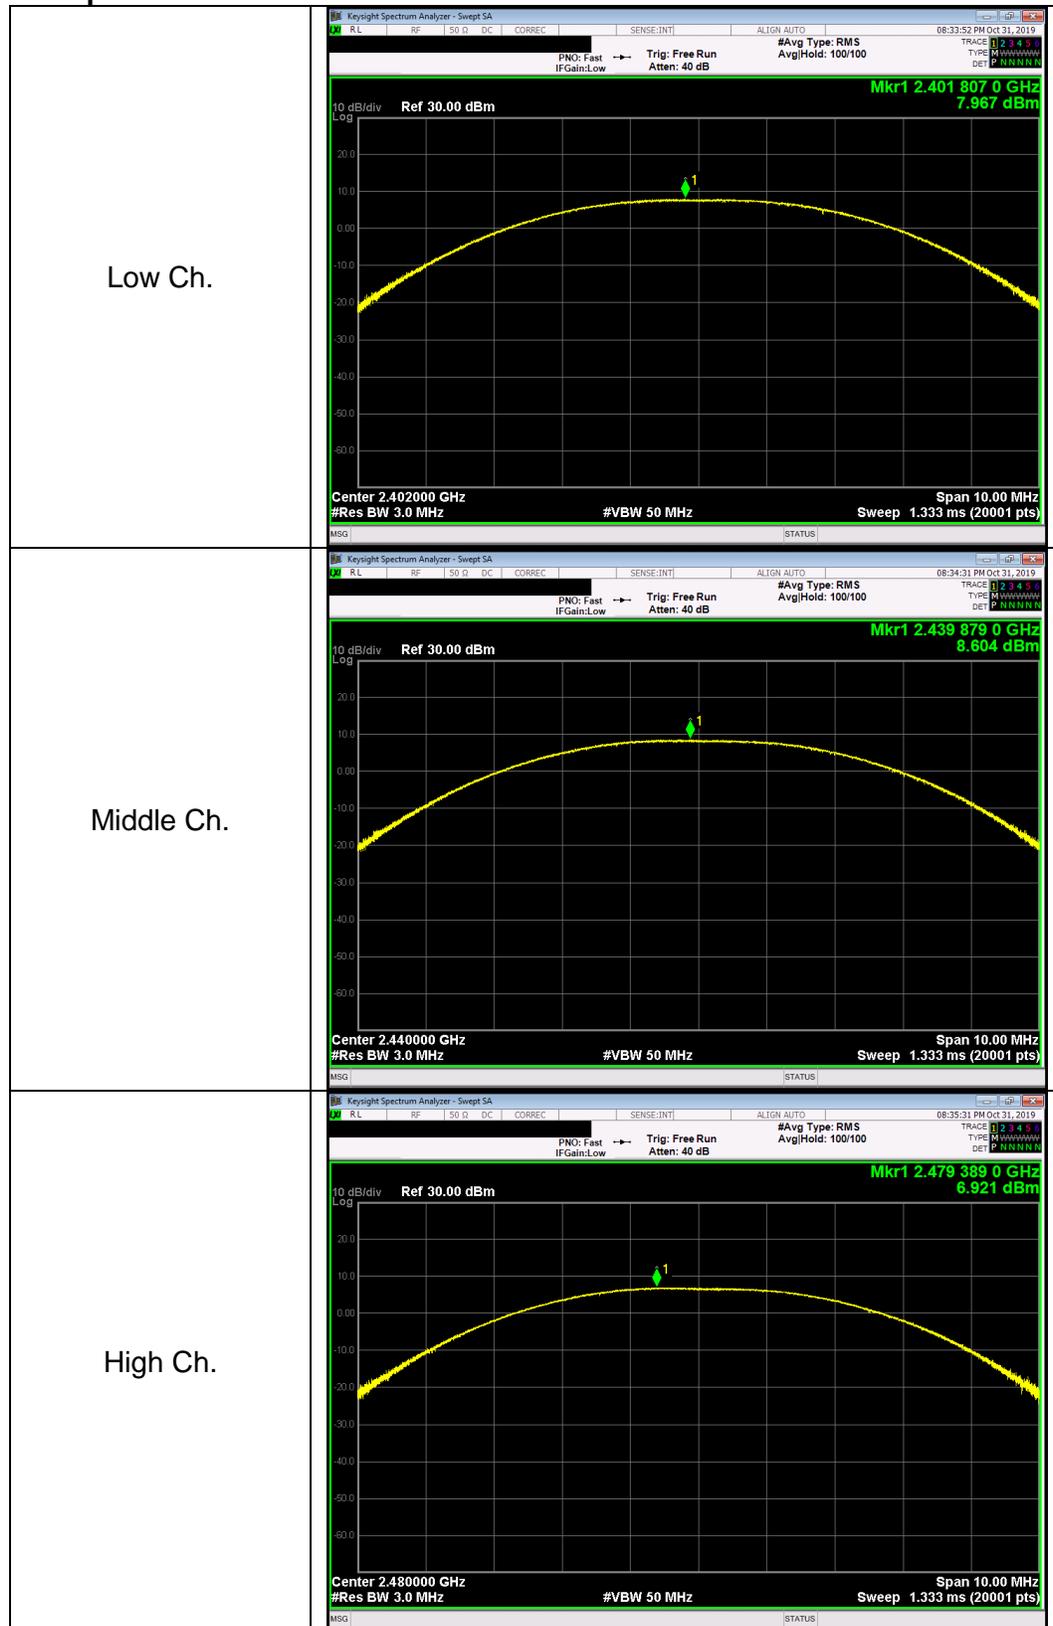

10.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power. The duty factor already has been added.

- 1Mbps

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2 402	6.075	4.050
Middle	2 440	6.785	4.770
High	2 480	5.720	3.732

- 2Mbps

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2 402	6.845	4.836
Middle	2 440	7.451	5.561
High	2 480	6.025	4.004

10.4. PSD

LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

Power Spectral Density was performed utilizing the ANSI C63.10 section 11.10.2 (Method PKPSD).

RESULTS

- 1Mbps


Channel	Frequency [MHz]	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Margin [dB]
Low	2 402	-9.71	8.00	-17.71
Mid	2 440	-8.62	8.00	-16.62
High	2 480	-9.84	8.00	-17.84

- 2Mbps


Channel	Frequency [MHz]	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Margin [dB]
Low	2 402	-11.08	8.00	-19.08
Mid	2 440	-10.12	8.00	-18.12
High	2 480	-11.71	8.00	-19.71

POWER SPECTRAL DENSITY PLOTS

- 1Mbps

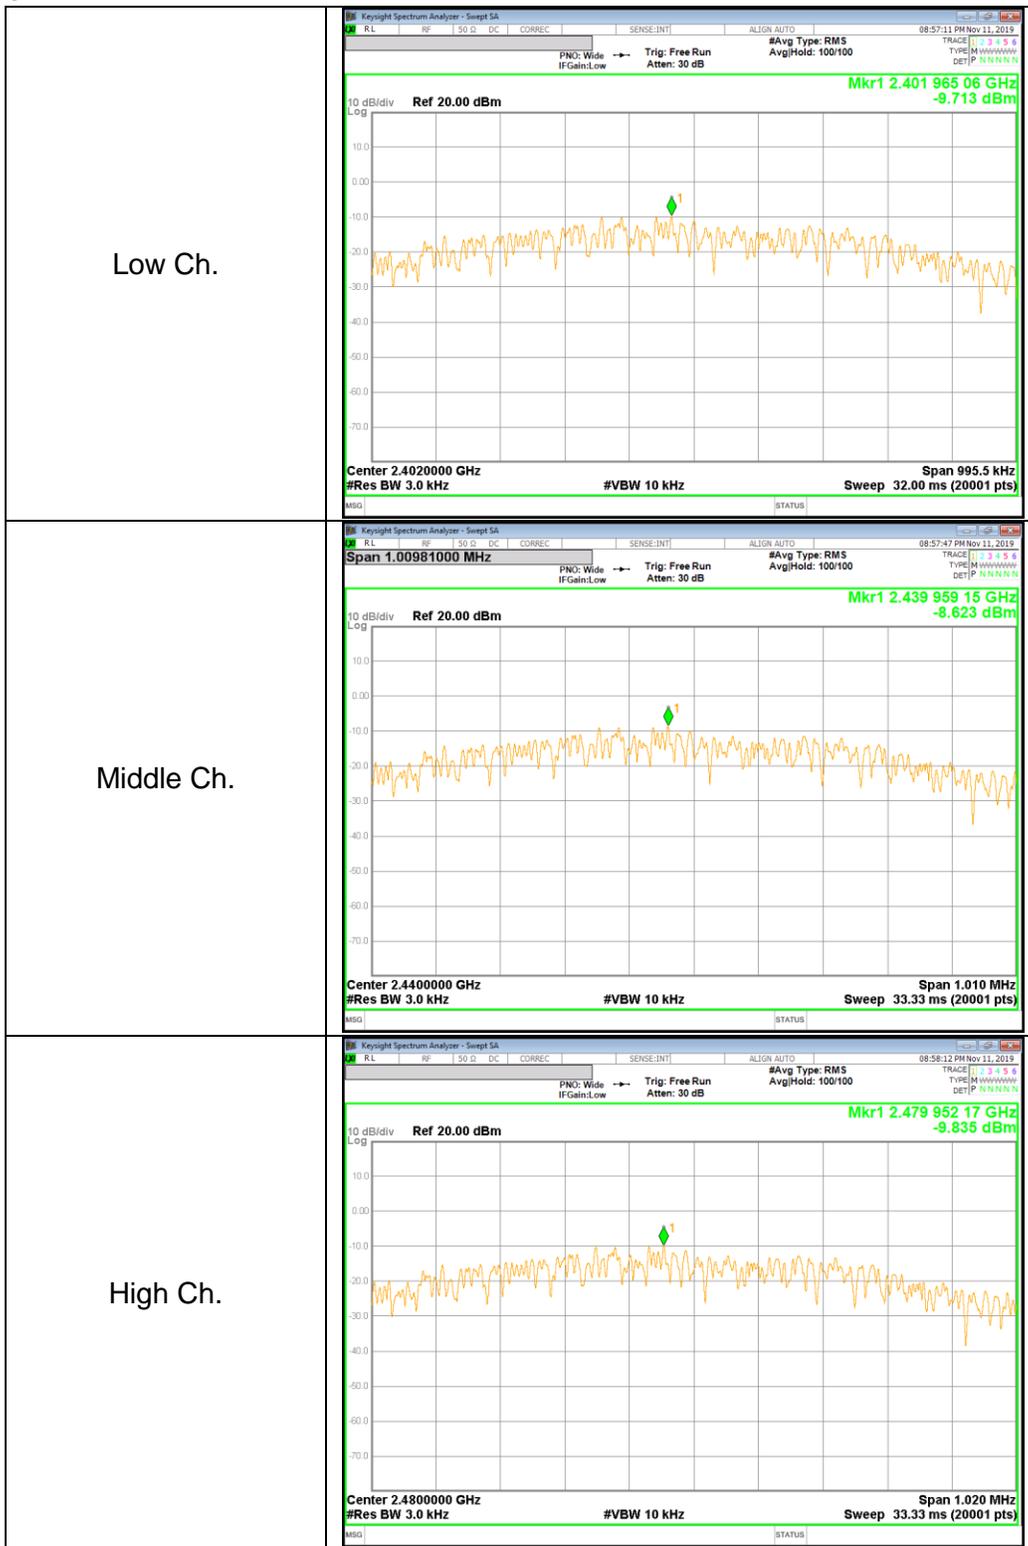

- 2Mbps

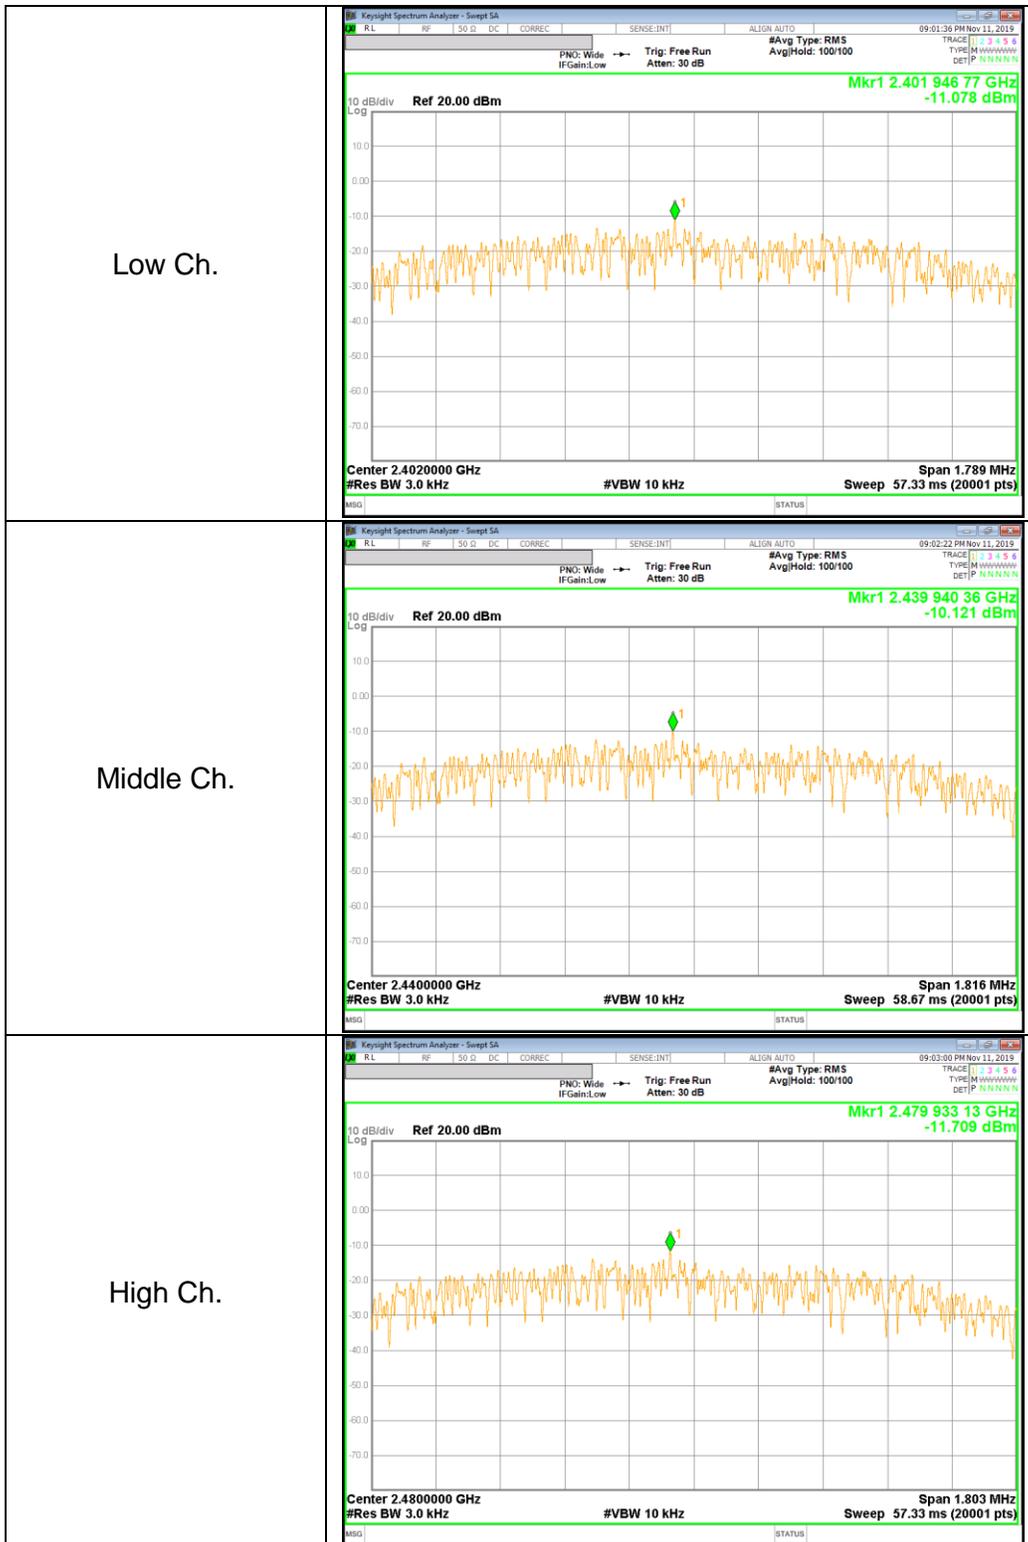

10.5. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.247 (d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.

RESULTS


BANDEDGE & SPURIOUS EMISSIONS, LOW CHANNEL (1Mbps)

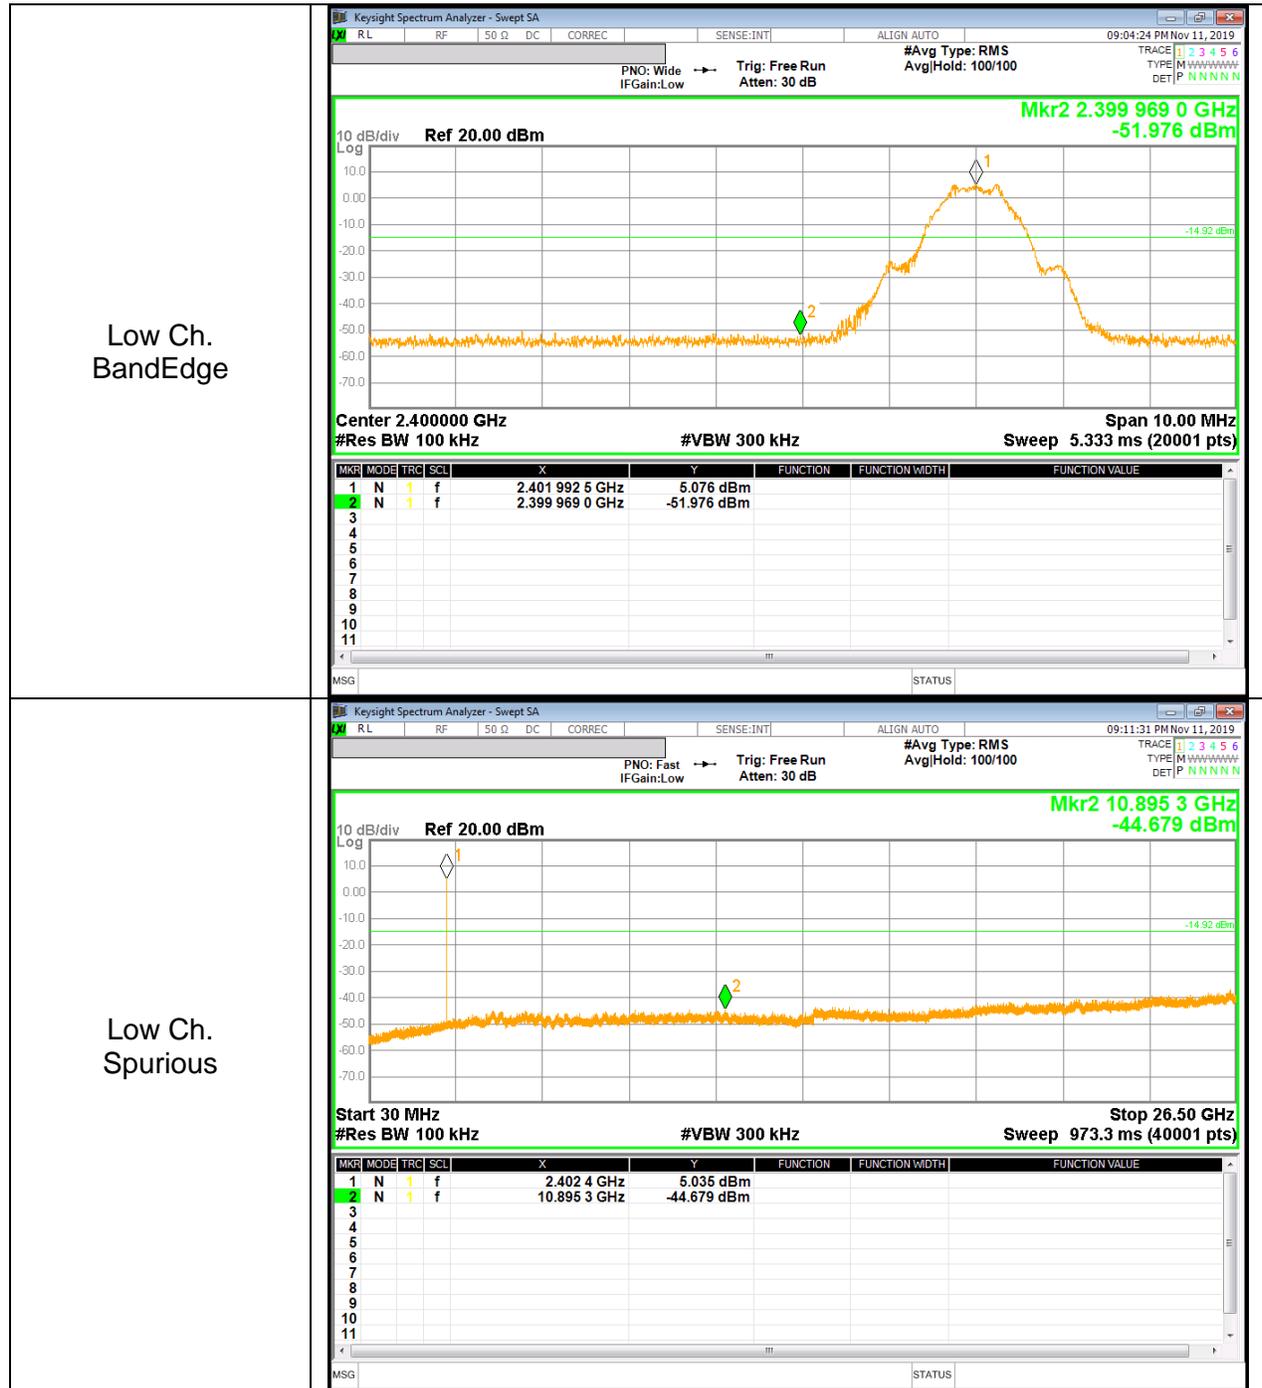


BANDEDGE & SPURIOUS EMISSIONS, MID CHANNEL (1Mbps)

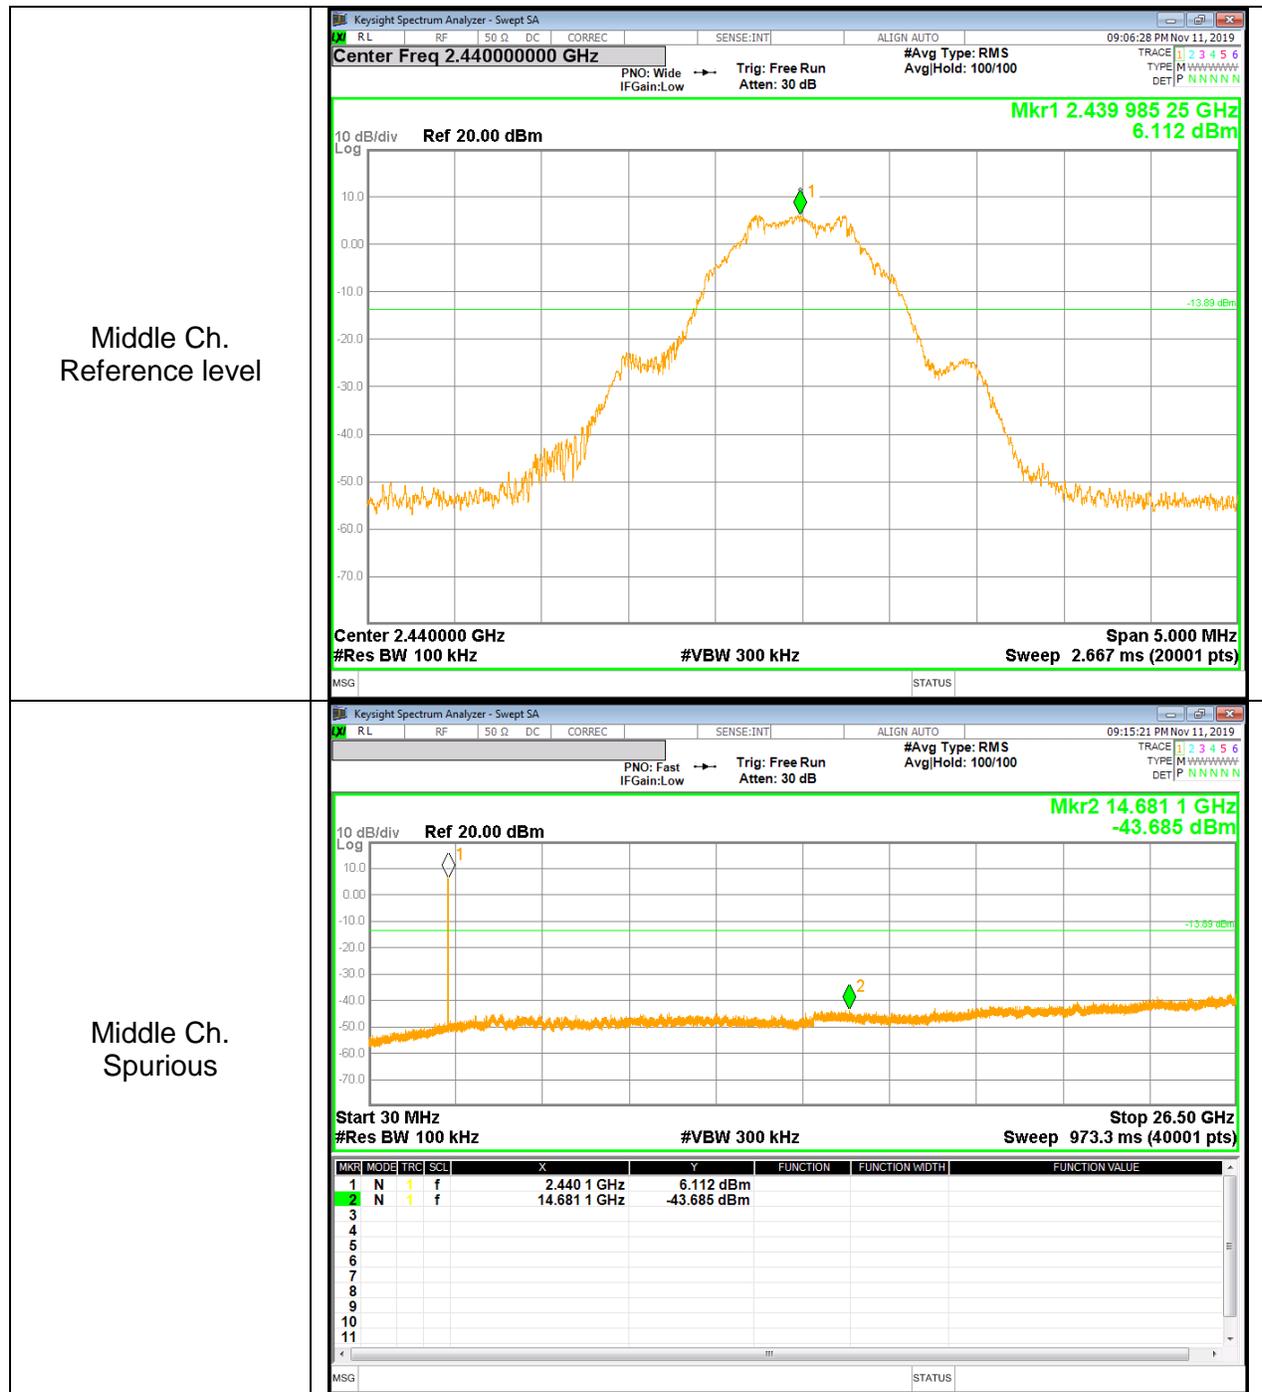


BANDEDGE & SPURIOUS EMISSIONS, HIGH CHANNEL (1Mbps)

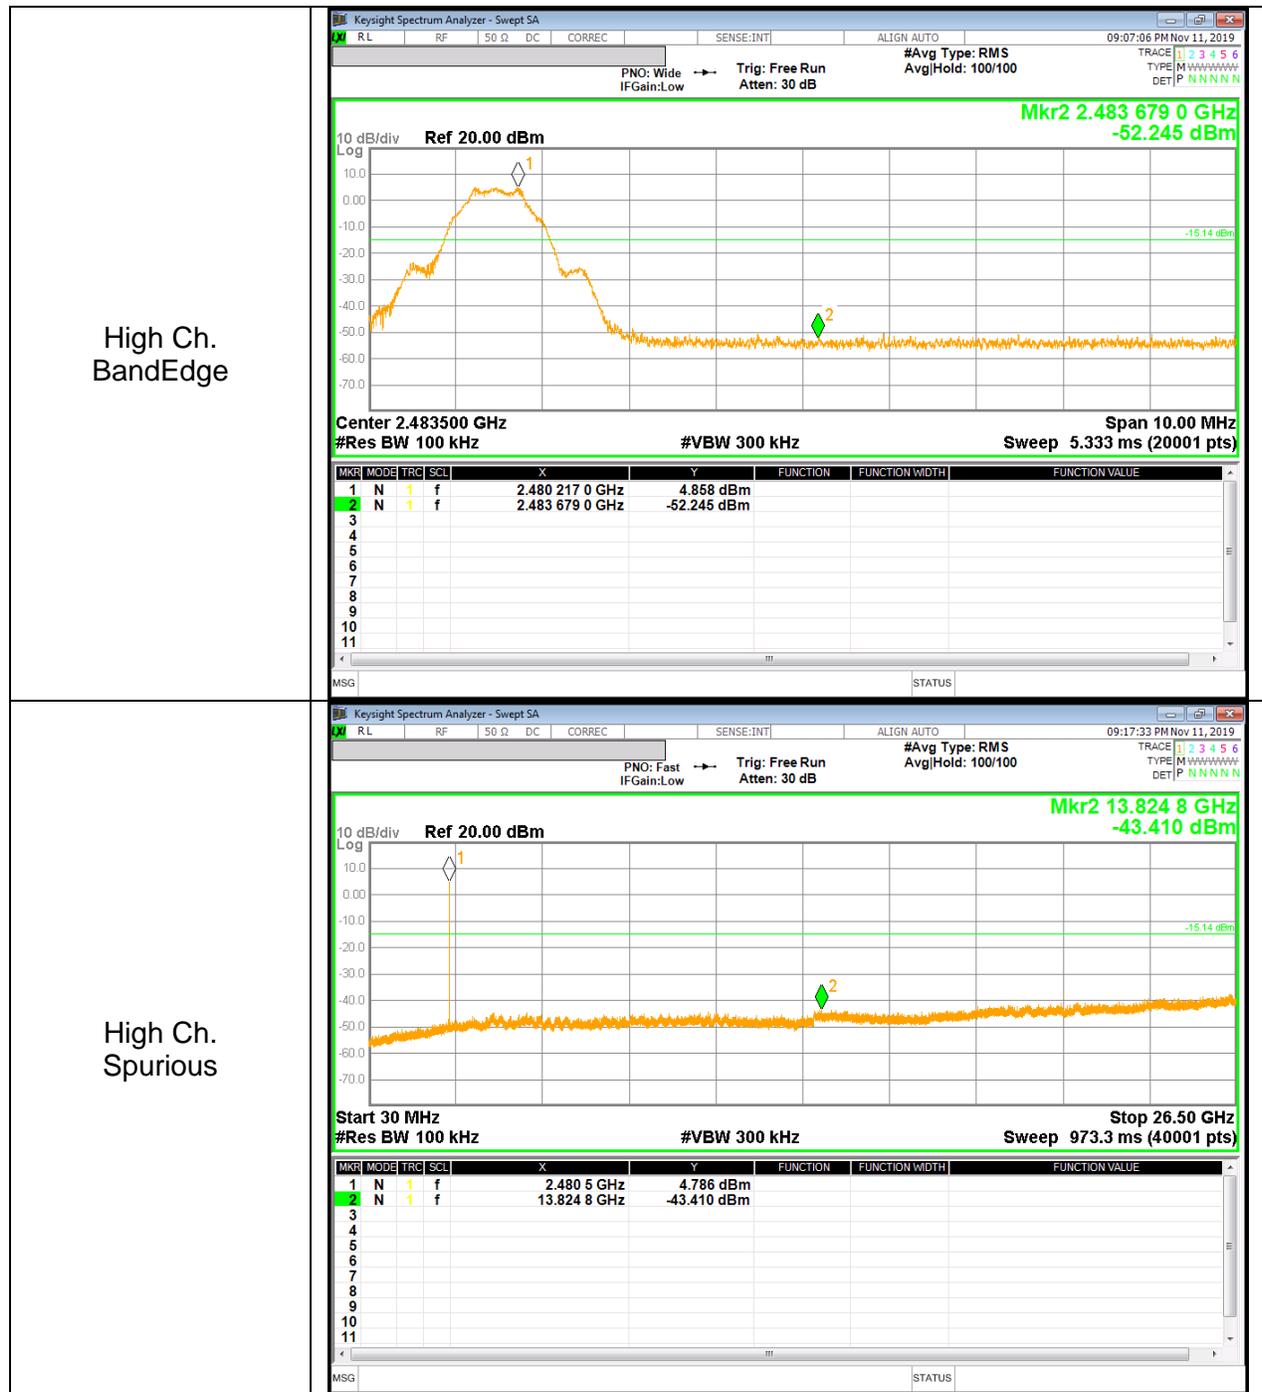


BANDEDGE & SPURIOUS EMISSIONS, LOW CHANNEL (2Mbps)

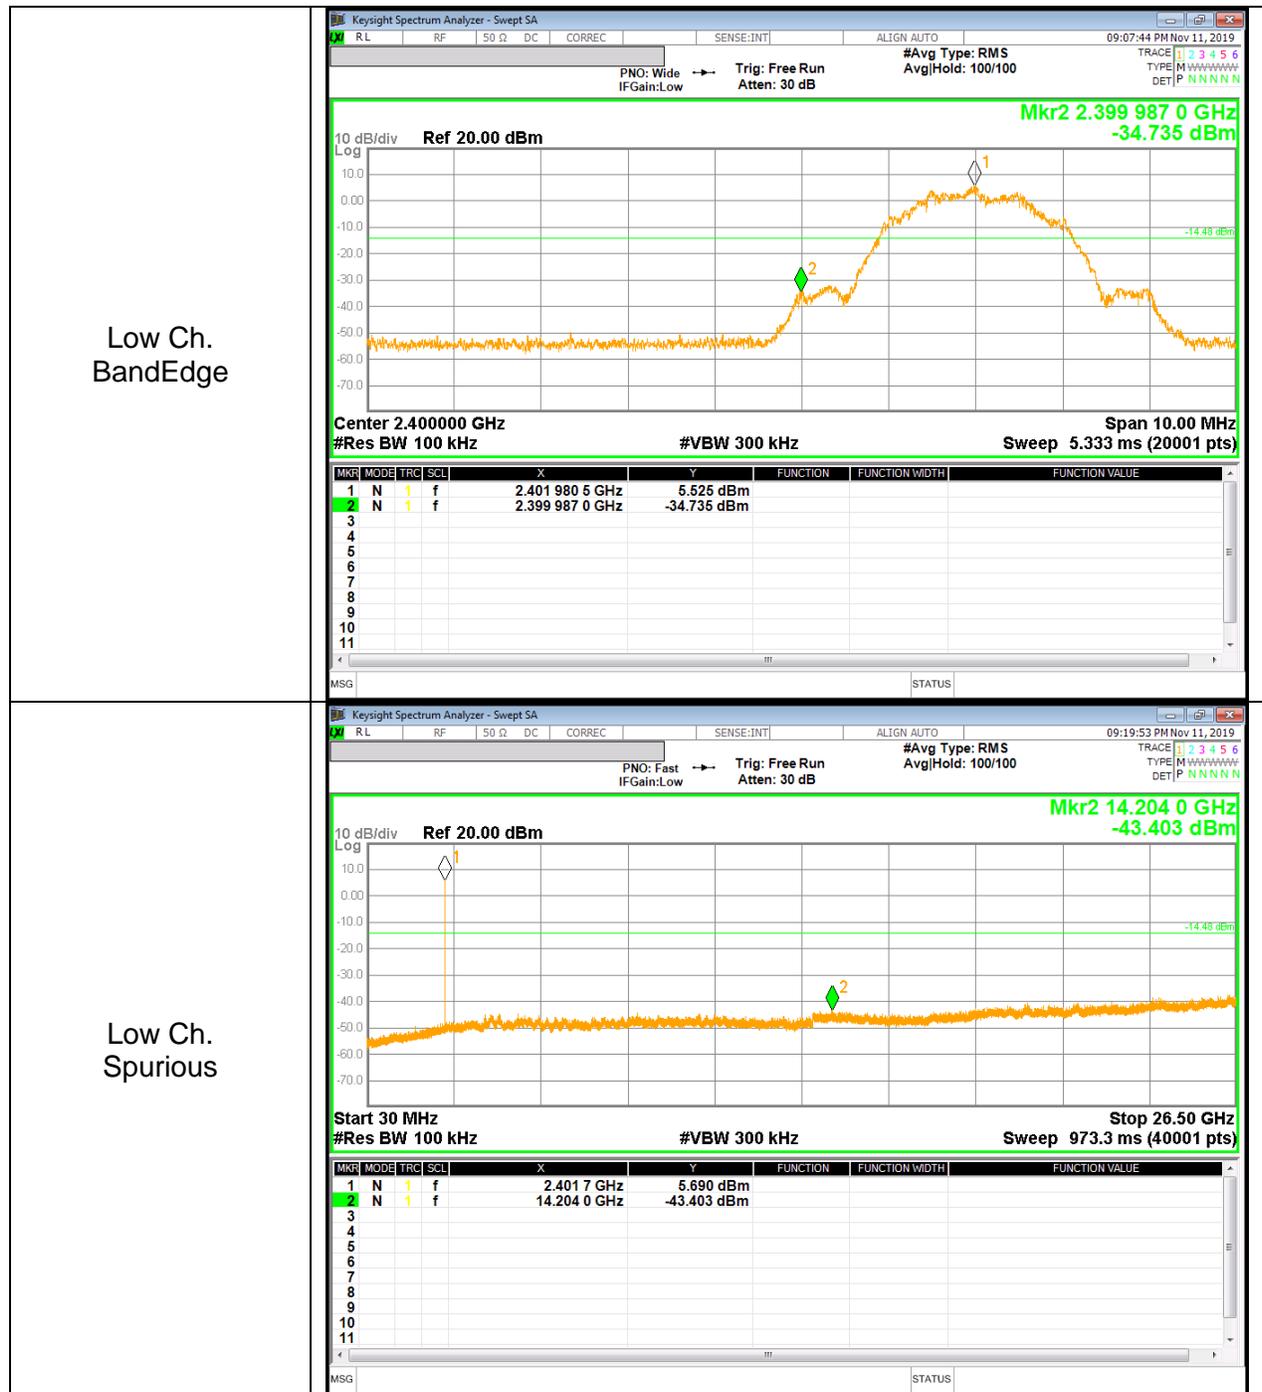

BANDEDGE & SPURIOUS EMISSIONS, MID CHANNEL (2Mbps)

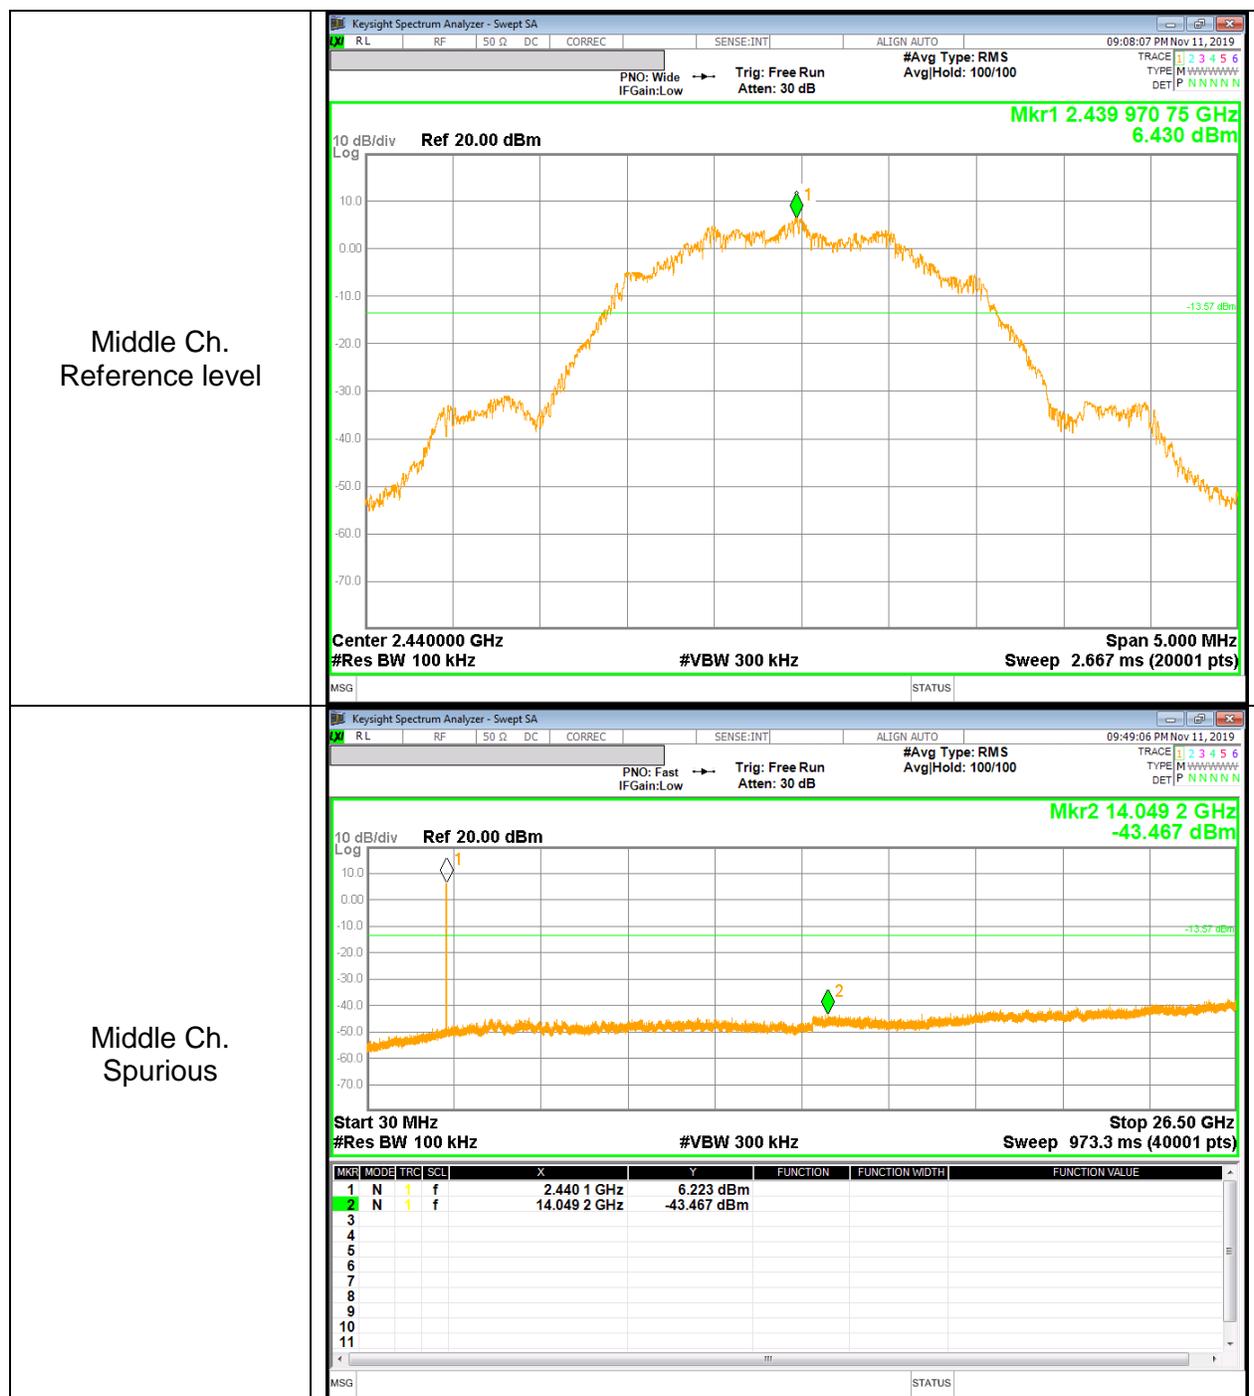

BANDEDGE & SPURIOUS EMISSIONS, HIGH CHANNEL (2Mbps)

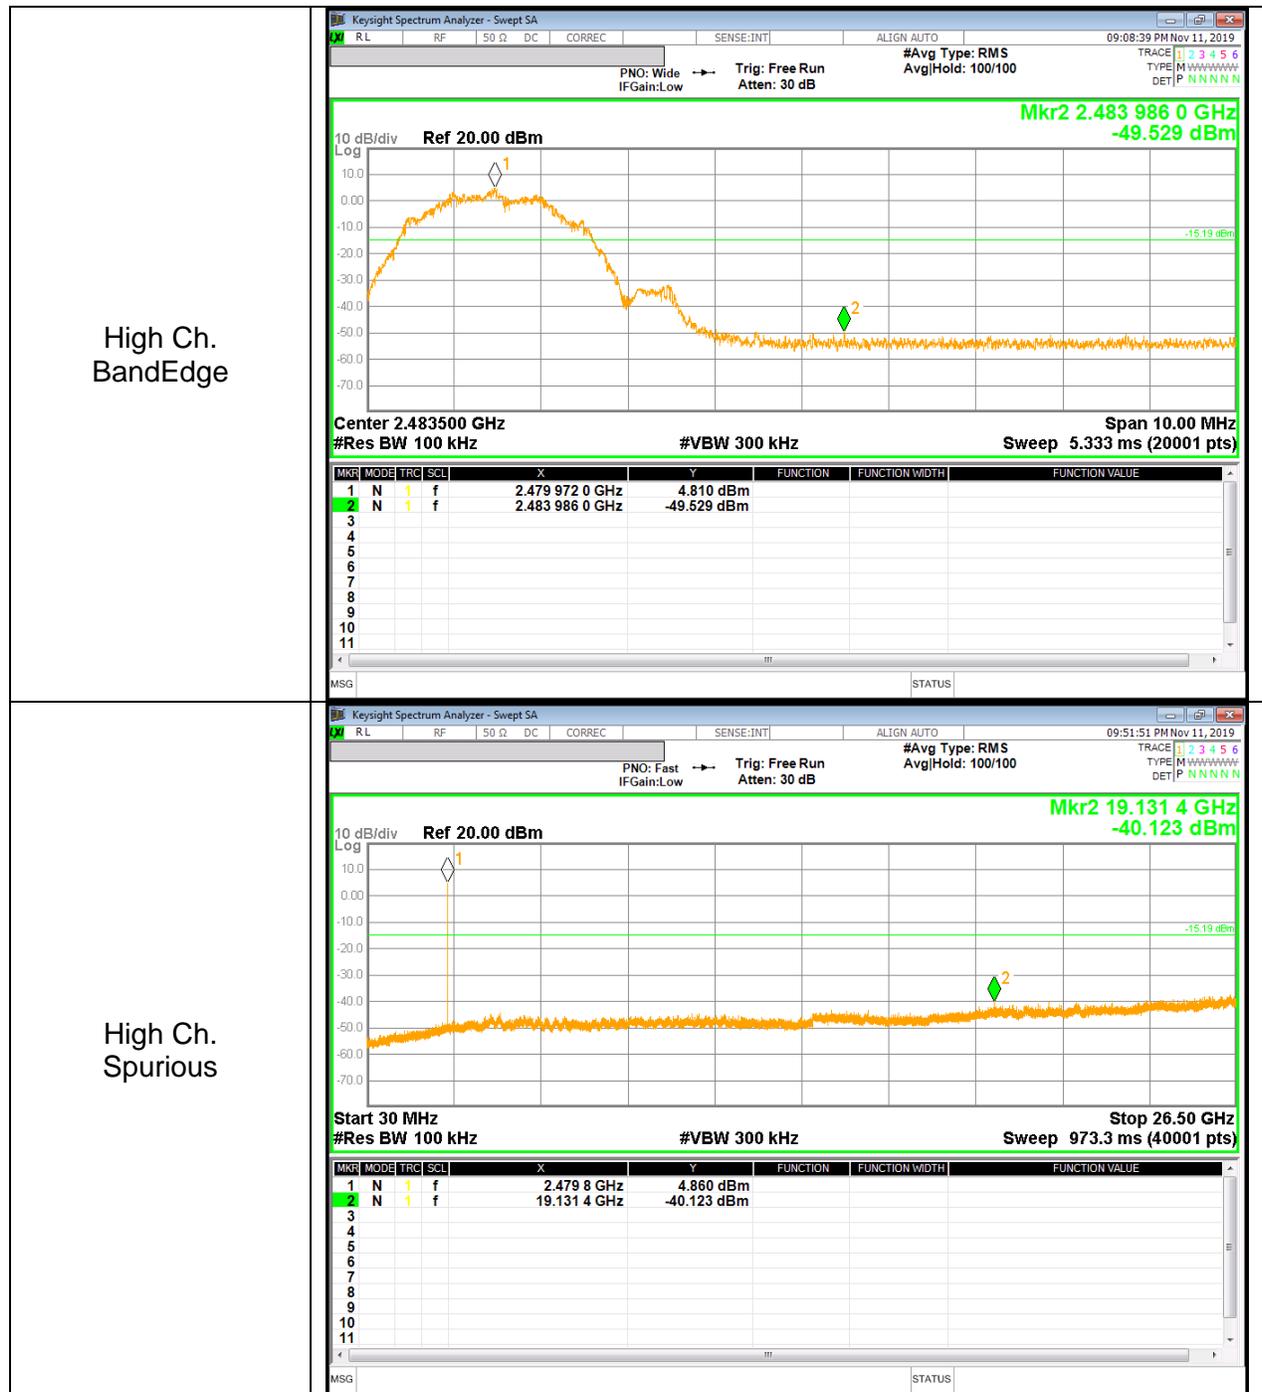

11. RADIATED TEST RESULTS

11.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. (Restricted bandedge, Final detection of spurious harmonic emissions) Duty cycle factor = $10 \log(1/x)$. For this sample: For 1Mbps, DCF = $10 \log(1/0.604) = 2.19 \text{ dB}$ (Spectrum Analyzer round it up to 2.19dB) and for 2Mbps, DCF = $10 \log(1/0.310) = 5.09 \text{ dB}$ (Spectrum Analyzer round it up to 5.10dB)

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

The spectrum from 1 GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.


Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open area test site.
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

11.2. TRANSMITTER ABOVE 1 GHz

11.2.1. 1Mbps MODE

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

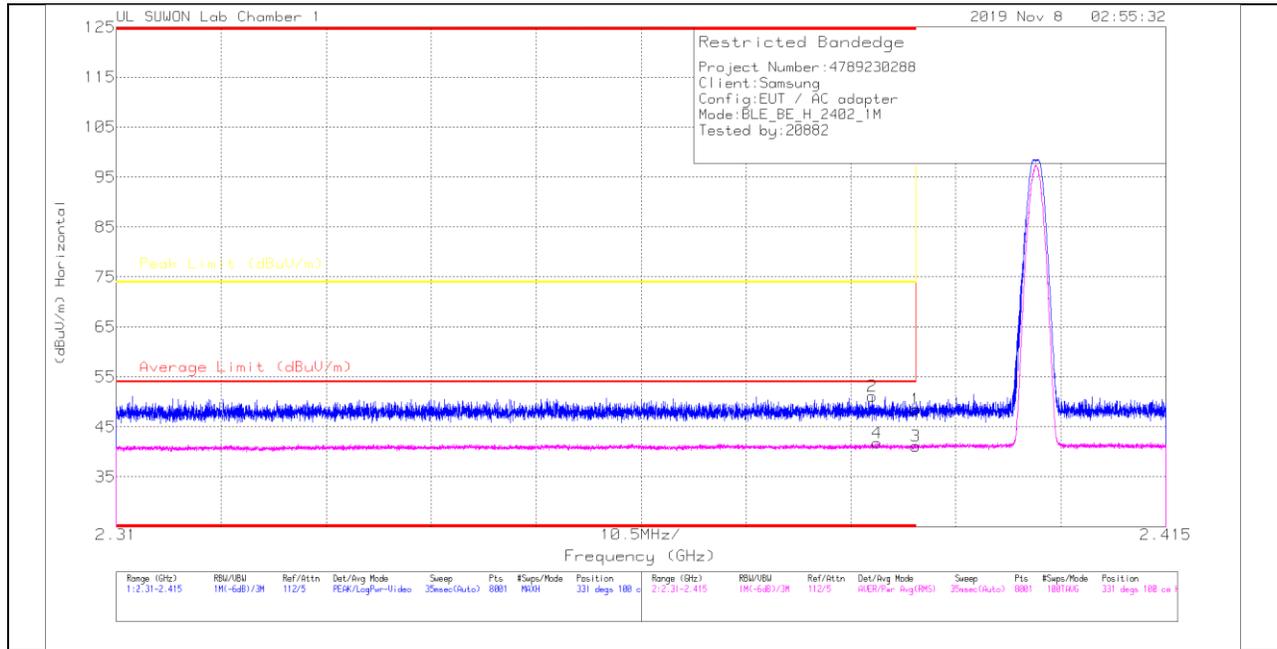


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.26	PK	31.7	-25.5	0	48.46	-	-	74	-25.54	331	100	H
2	* 2.3856	44.98	PK	31.7	-25.5	0	51.18	-	-	74	-22.82	331	100	H
3	* 2.39	32.81	RMS	31.7	-25.5	2.19	41.2	54	-12.8	-	-	331	100	H
4	* 2.38614	33.36	RMS	31.7	-25.5	2.19	41.75	54	-12.25	-	-	331	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

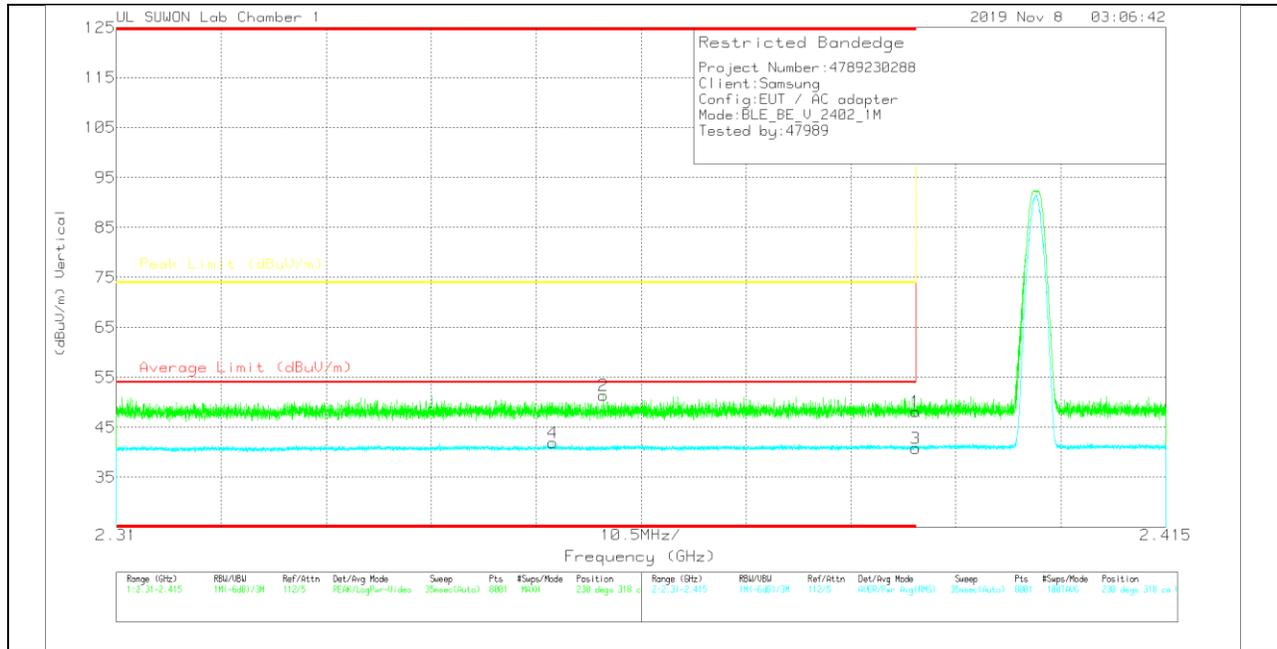

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.91	PK	31.7	-25.5	0	48.11	-	-	74	-25.89	230	318	V
2	* 2.35872	45.5	PK	31.6	-25.7	0	51.4	-	-	74	-22.6	230	318	V
3	* 2.39	32.45	RMS	31.7	-25.5	2.19	40.84	54	-13.16	-	-	230	318	V
4	* 2.35367	33.63	RMS	31.6	-25.5	2.19	41.82	54	-12.08	-	-	230	318	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

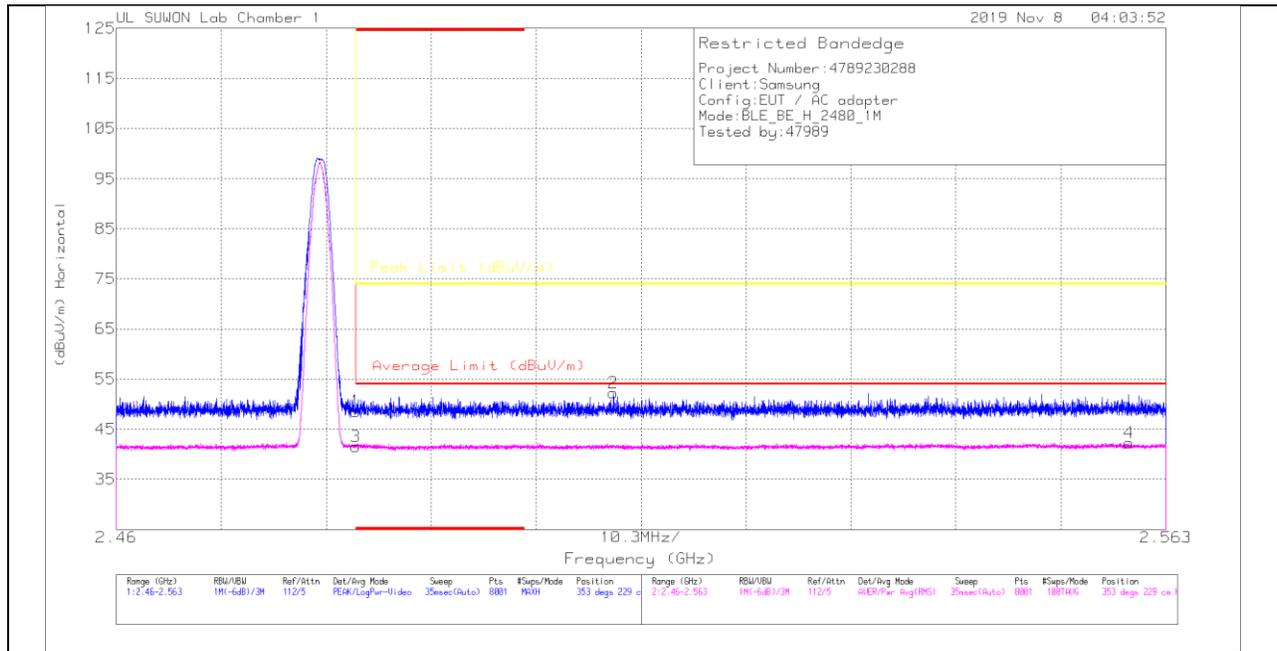


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	41.87	Pk	31.9	-25.2	0	48.57	-	-	74	-25.43	353	229	H
2	2.50877	45.32	Pk	32	-25.1	0	52.22	-	-	74	-21.78	353	229	H
3	* 2.48351	32.65	RMS	31.9	-25.2	2.19	41.54	54	-12.46	-	-	353	229	H
4	2.5594	33.22	RMS	32	-25.1	2.19	42.31	54	-11.69	-	-	353	229	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

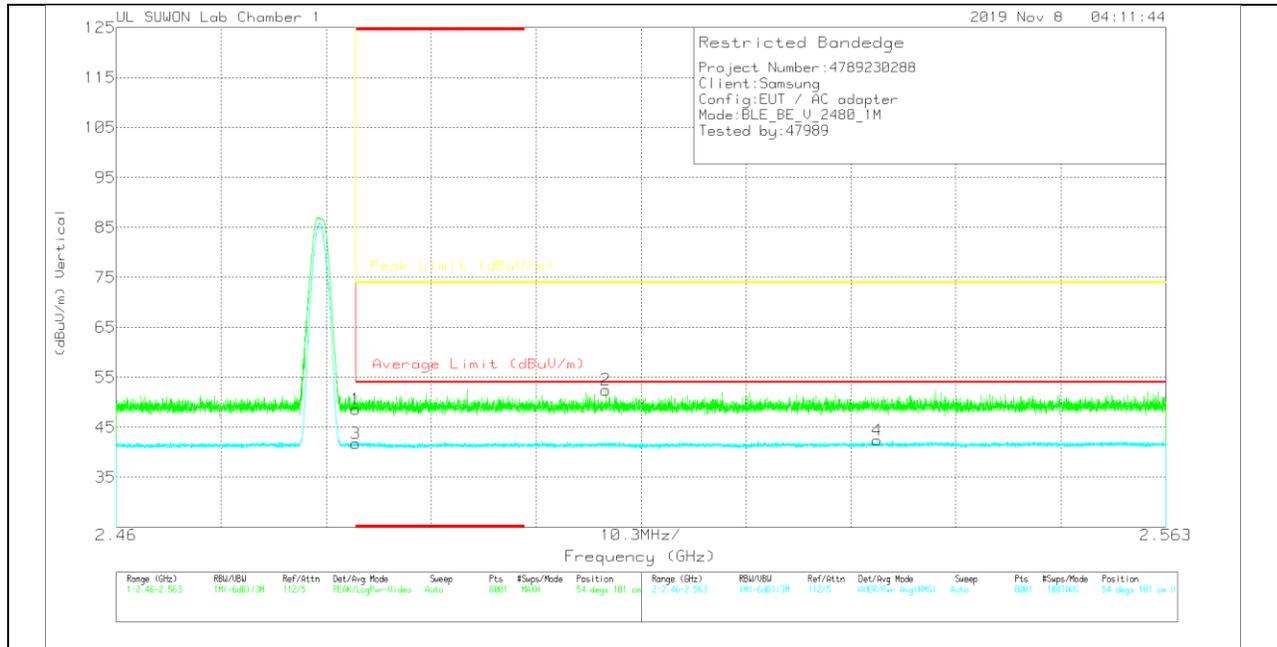

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	41.94	PK	31.9	-25.2	0	48.64	-	-	74	-25.36	54	101	V
2	2.50804	45.54	PK	32	-25.1	0	52.44	-	-	74	-21.56	54	101	V
3	* 2.48351	32.86	RMS	31.9	-25.2	2.19	41.75	54	-12.25	-	-	54	101	V
4	2.53466	33.39	RMS	32	-25.2	2.19	42.38	54	-11.62	-	-	54	101	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

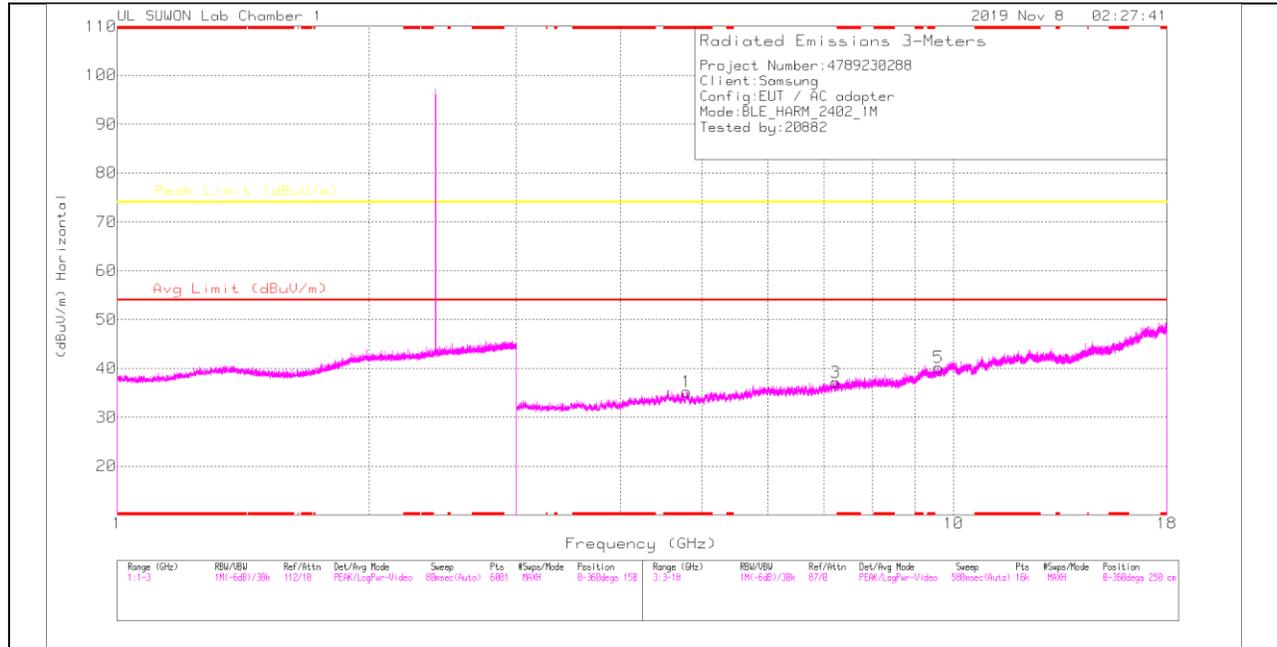

LOW CHANNEL VERTICAL

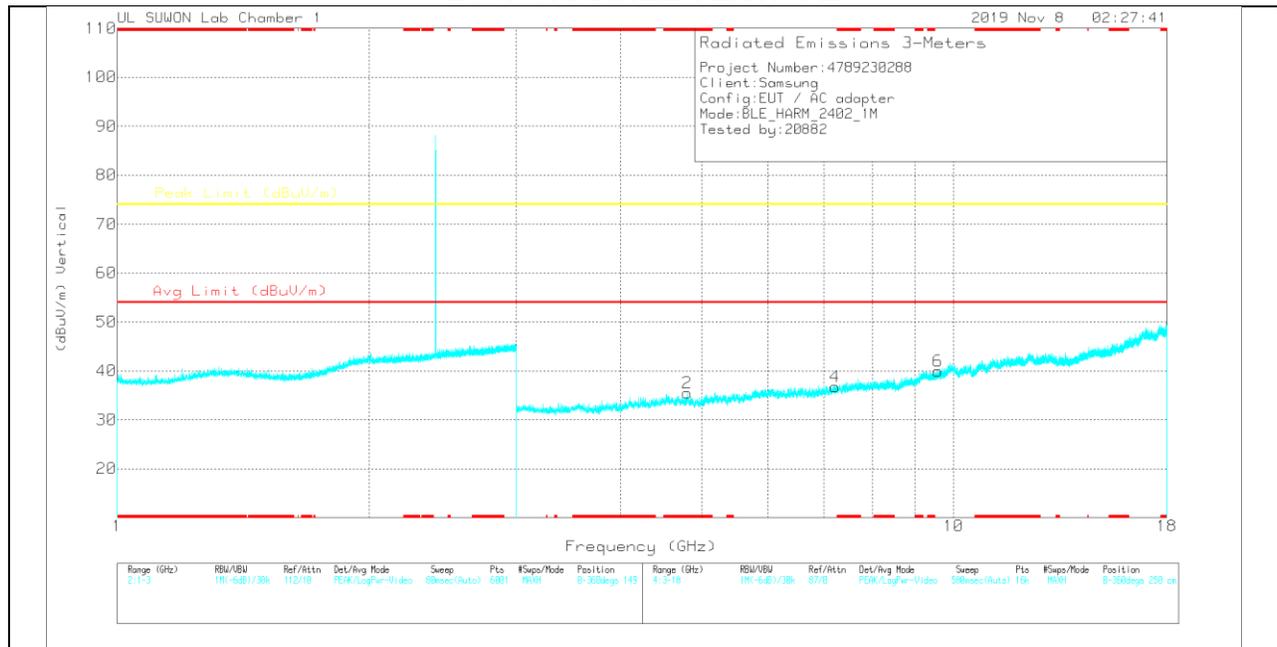

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.79801	32.67	PK	34.2	-31.6	0	35.27	-	-	74	-38.73	0-360	250	H
3	7.2288	28.99	PK	35.8	-27.7	0	37.09	-	-	74	-36.91	0-360	250	H
5	9.59396	26.4	PK	37	-23.2	0	40.2	-	-	74	-33.8	0-360	250	H
2	* 4.80364	32.83	PK	34.2	-31.5	0	35.53	-	-	74	-38.47	0-360	250	V
4	7.21286	28.87	PK	35.8	-27.9	0	36.77	-	-	74	-37.23	0-360	250	V
6	9.58459	26.4	PK	37	-23.4	0	40	-	-	74	-34	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.79651	41.09	PK2	34.2	-31.6	0	43.69	-	-	74	-30.31	0	100	H
* 4.79637	40.73	PK2	34.2	-31.6	0	43.33	-	-	74	-30.67	0	100	V
7.22826	36.73	PK2	35.8	-27.7	0	44.83	-	-	74	-29.17	0	100	H
7.2283	37.03	PK2	35.8	-27.7	0	45.13	-	-	74	-28.87	0	100	V
9.59314	35.33	PK2	37	-23.2	0	49.13	-	-	74	-24.87	0	100	H
9.59592	35.05	PK2	37	-23.2	0	48.85	-	-	74	-25.15	0	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

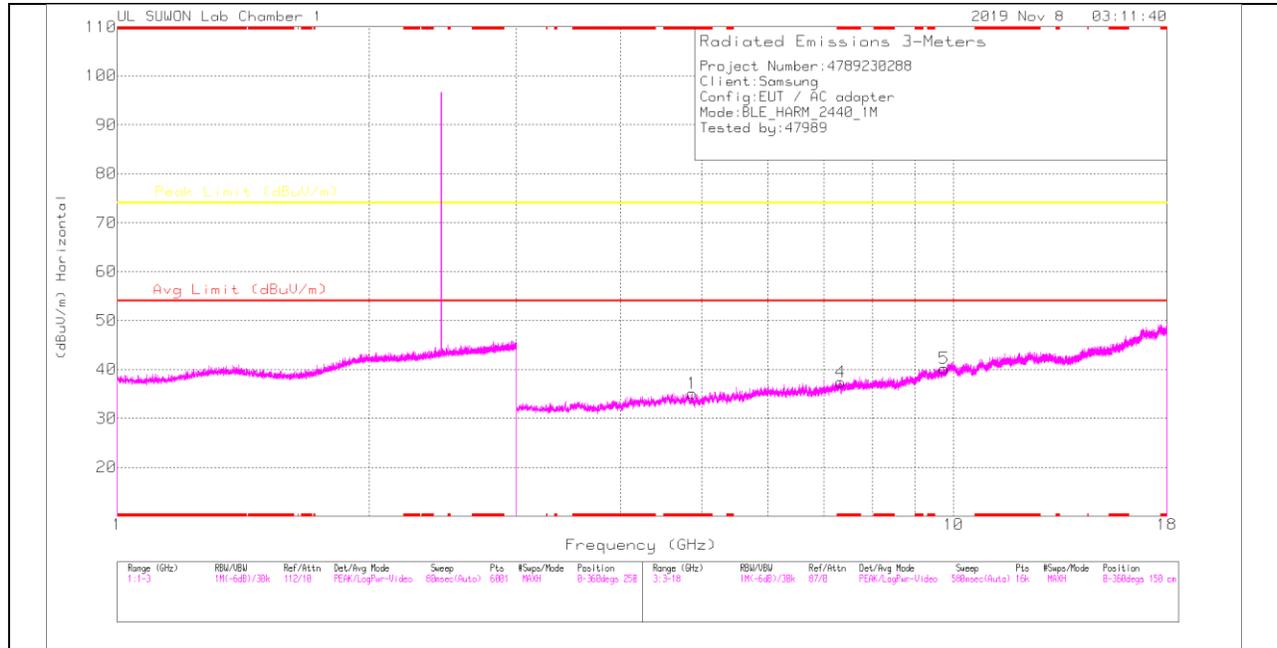

MID CHANNEL VERTICAL

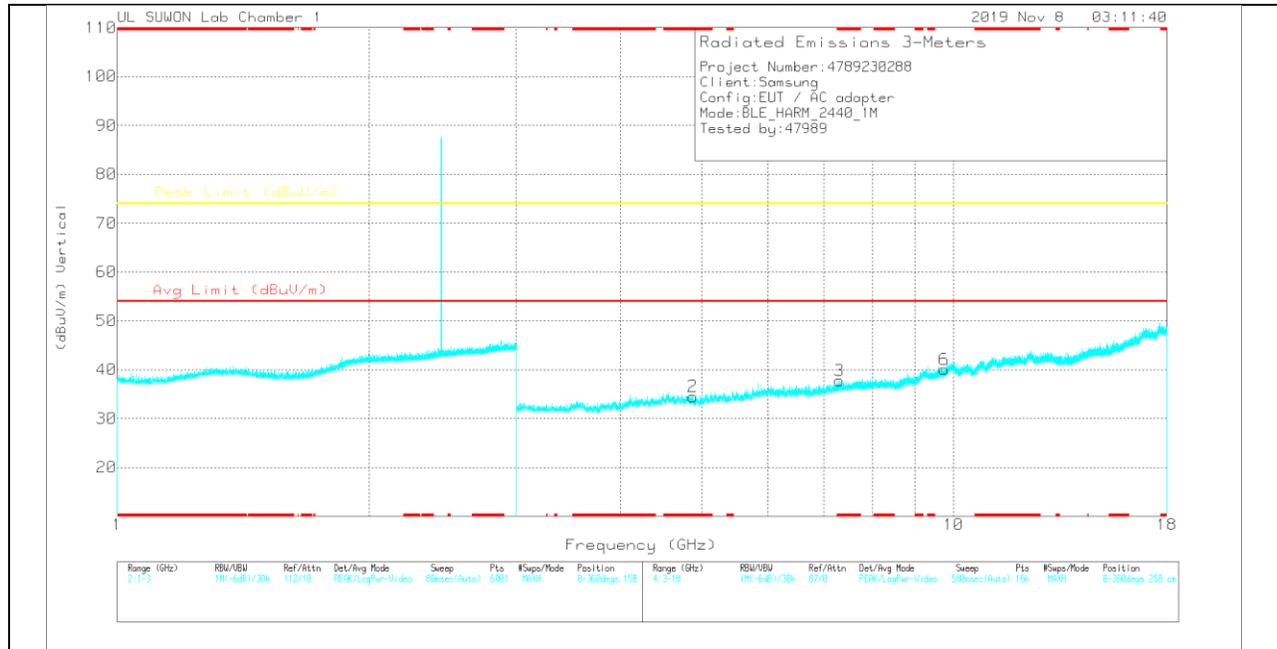

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.87394	32.45	Avg	34.2	-31.6	0	35.05	-	-	74	-38.95	0-360	150	H
4	* 7.32535	28.93	Avg	35.8	-27.3	0	37.43	-	-	74	-36.57	0-360	150	H
5	9.74864	26.77	Avg	37.2	-23.8	0	40.17	-	-	74	-33.83	0-360	250	H
2	* 4.87957	31.93	Avg	34.2	-31.6	0	34.53	-	-	74	-39.47	0-360	250	V
3	* 7.30473	29.63	Avg	35.8	-27.6	0	37.83	-	-	74	-36.17	0-360	150	V
6	9.7477	26.64	Avg	37.2	-23.8	0	40.04	-	-	74	-33.96	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak Detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.88146	40.88	PK2	34.2	-31.6	0	43.48	-	-	74	-30.52	360	100	H
* 4.87733	41.19	PK2	34.2	-31.5	0	43.89	-	-	74	-30.11	360	100	V
* 7.32076	37.56	PK2	35.8	-27.2	0	46.16	-	-	74	-27.84	360	100	H
* 7.32439	37.47	PK2	35.8	-27.3	0	45.97	-	-	74	-28.03	360	100	V
* 9.45956	35.14	PK2	36.8	-24.1	0	47.84	-	-	74	-26.16	360	100	H
* 9.4559	34.88	PK2	36.8	-24.2	0	47.48	-	-	74	-26.52	360	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

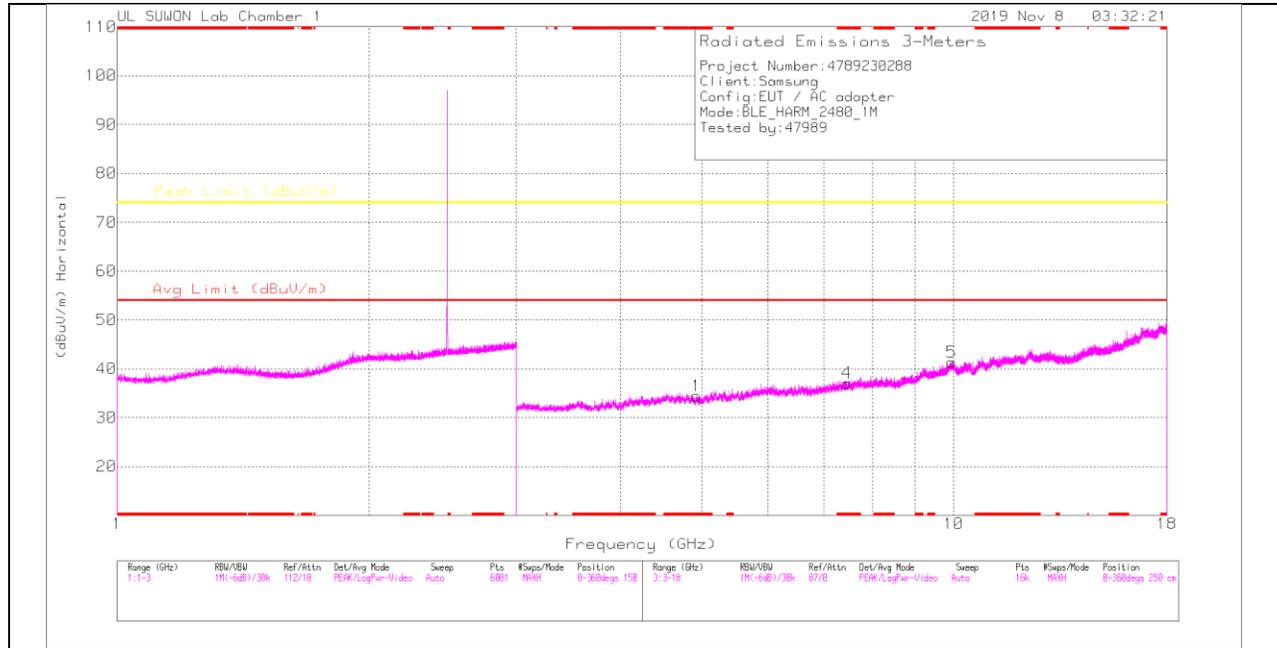

HIGH CHANNEL VERTICAL

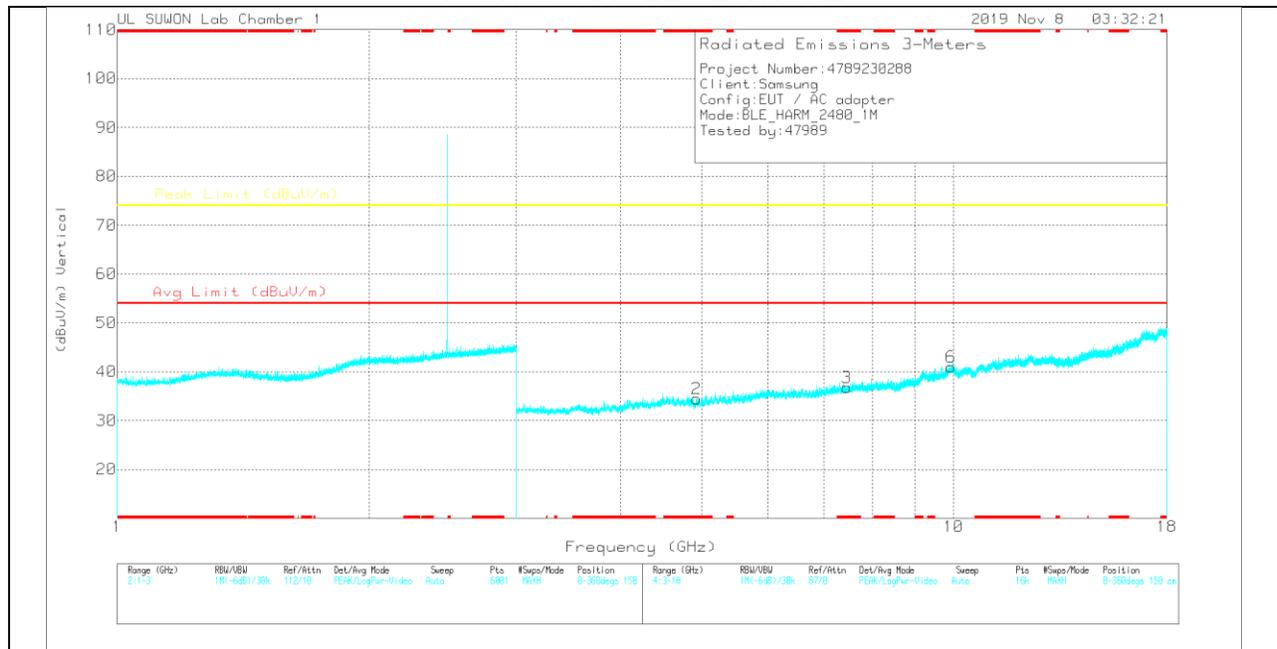

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.93019	31.88	PK	34.2	-31.6	0	34.48	-	-	74	-39.52	0-360	150	H
4	* 7.45284	28.28	PK	35.8	-27	0	37.08	-	-	74	-36.92	0-360	150	H
5	9.94831	25.39	PK	37.5	-21.5	0	41.39	-	-	74	-32.61	0-360	250	H
2	* 4.93113	31.95	PK	34.2	-31.7	0	34.45	-	-	74	-39.55	0-360	150	V
3	* 7.45284	27.99	PK	35.8	-27	0	36.79	-	-	74	-37.21	0-360	250	V
6	9.938	24.9	PK	37.5	-21.4	0	41	-	-	74	-33	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96041	40.18	PK2	34.2	-31.6	0	42.78	-	-	74	-31.22	360	100	H
* 4.96004	40.76	PK2	34.2	-31.6	0	43.36	-	-	74	-30.64	360	100	V
* 7.44298	37.06	PK2	35.8	-27.1	0	45.76	-	-	74	-28.24	360	100	H
* 7.43875	37.07	PK2	35.8	-27.1	0	45.77	-	-	74	-28.23	360	100	V
9.91926	33.38	PK2	37.5	-22	0	48.88	-	-	74	-25.12	360	100	H
9.92213	33.54	PK2	37.5	-22	0	49.04	-	-	74	-24.96	360	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.2.2. 2Mbps MODE

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

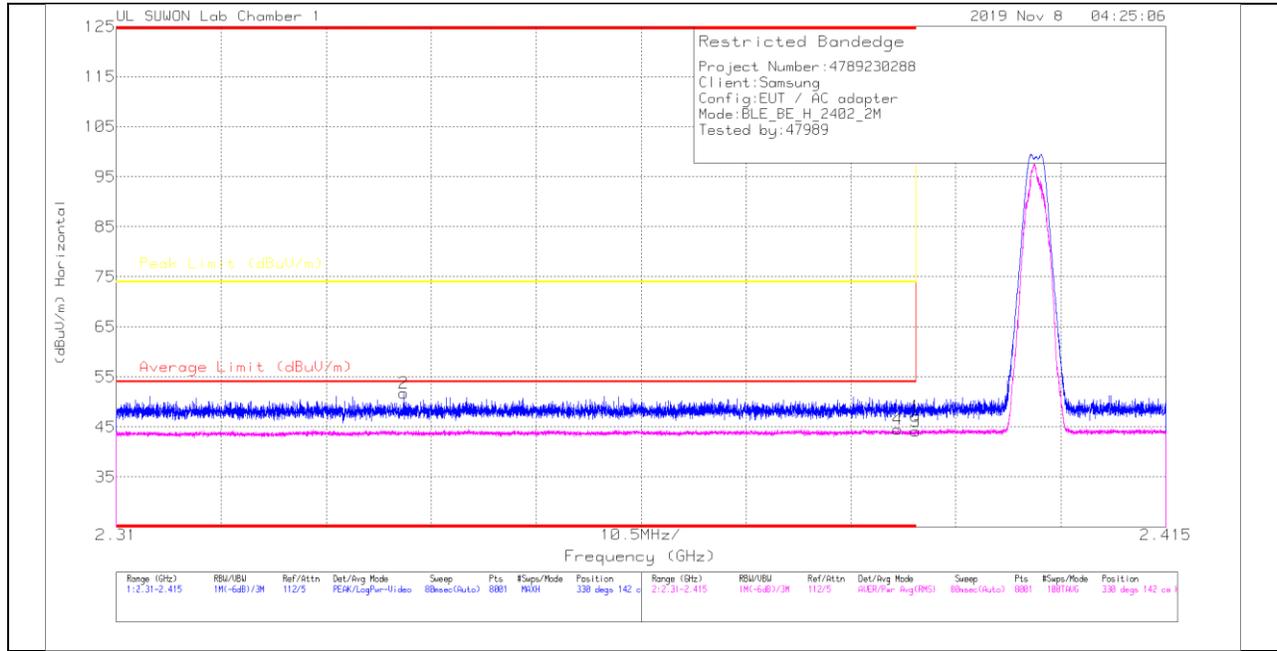


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.98	Pk	31.7	-25.5	0	47.18	-	-	74	-26.82	330	142	H
2	* 2.3877	45.8	Pk	31.5	-25.6	0	51.7	-	-	74	-22.3	330	142	H
3	* 2.39	32.82	RMS	31.7	-25.5	5.09	44.11	54	-9.89	-	-	330	142	H
4	* 2.3882	33.24	RMS	31.7	-25.5	5.09	44.53	54	-9.47	-	-	330	142	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

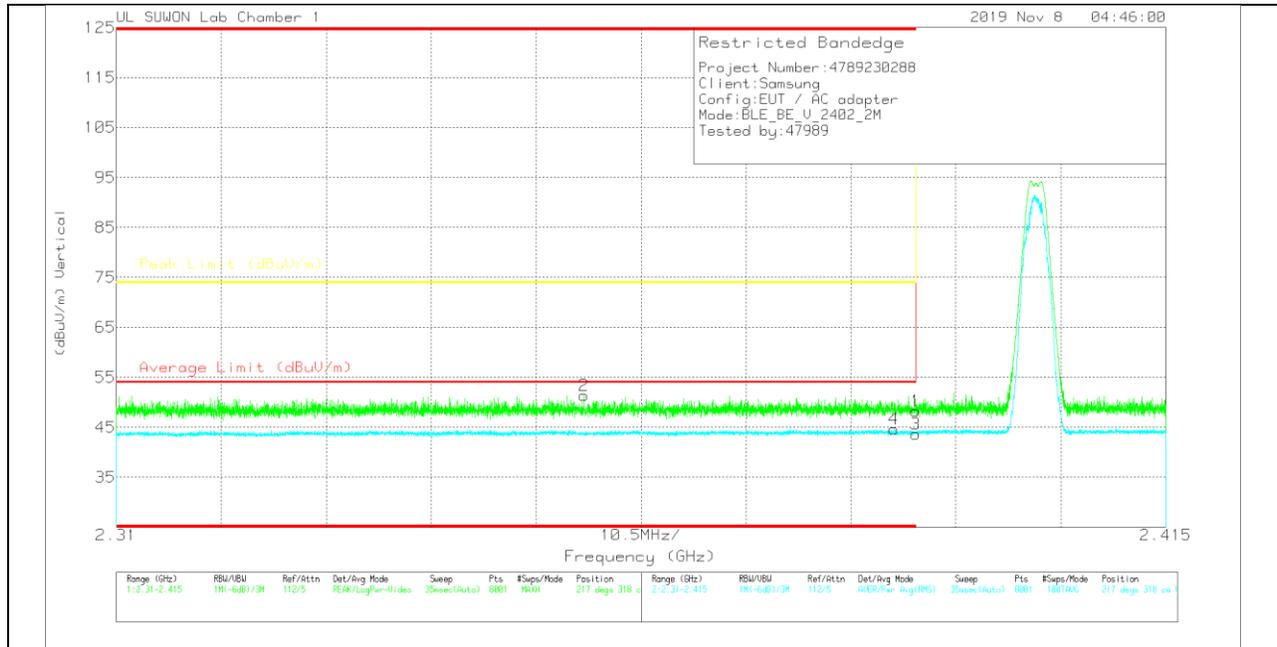

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.05	PK	31.7	-25.5	0	48.25	-	-	74	-25.75	217	318	V
2	* 2.35679	45.44	PK	31.6	-25.7	0	51.34	-	-	74	-22.66	217	318	V
3	* 2.39	32.39	RMS	31.7	-25.5	5.09	43.68	54	-10.32	-	-	217	318	V
4	* 2.38776	33.32	RMS	31.7	-25.5	5.09	44.61	54	-9.39	-	-	217	318	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

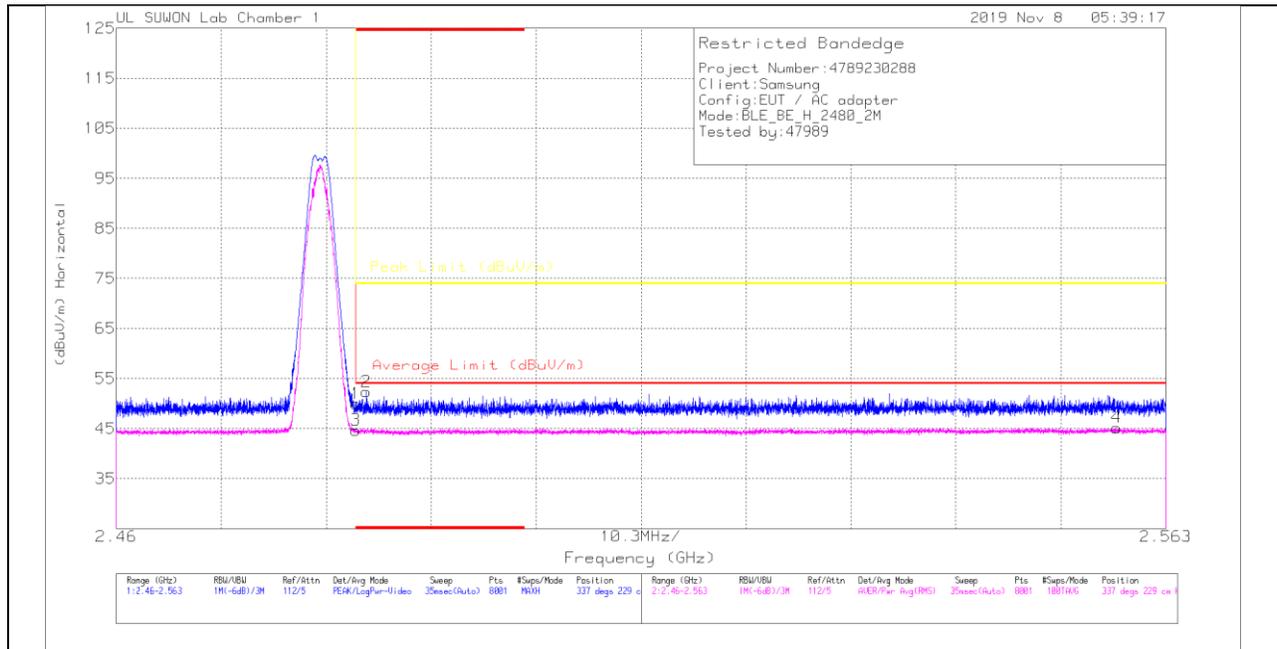


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.32	Pk	31.9	-25.2	0	50.02	-	-	74	-23.98	337	229	H
2	* 2.48455	45.72	Pk	31.9	-25.2	0	52.42	-	-	74	-21.58	337	229	H
3	* 2.48351	32.92	RMS	31.9	-25.2	5.09	44.71	54	-9.29	-	-	337	229	H
4	2.55817	33.12	RMS	32	-25	5.09	45.21	54	-8.79	-	-	337	229	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

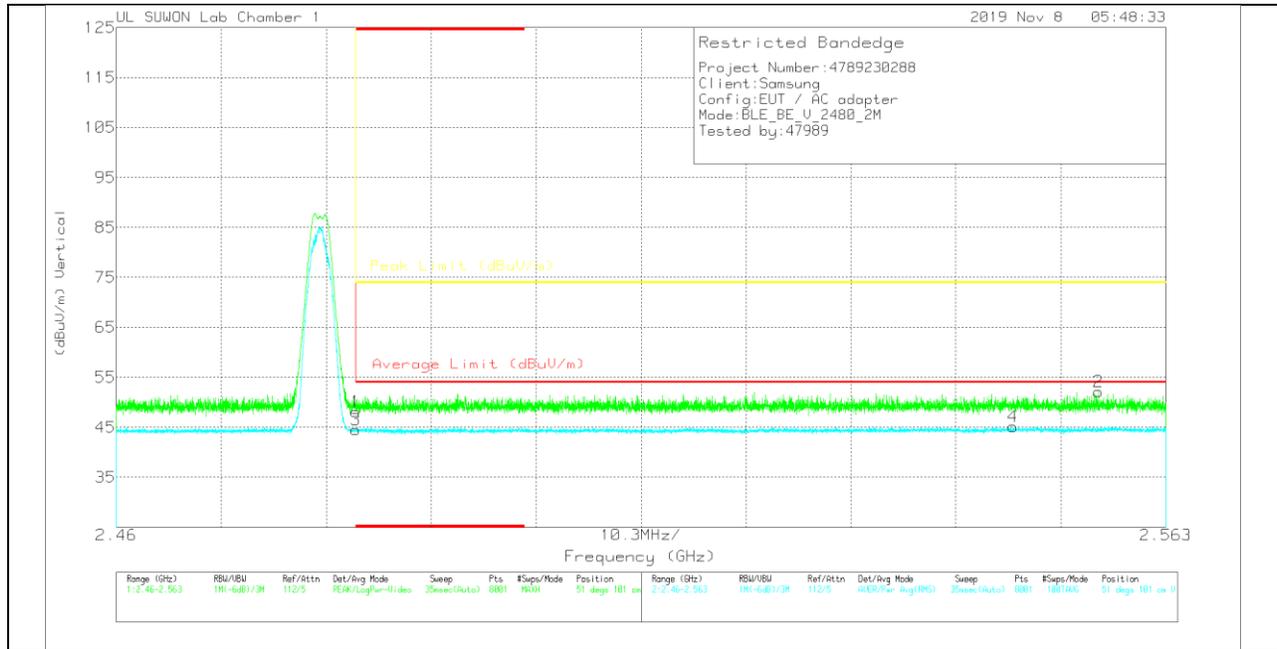

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	41.39	Pk	31.9	-25.2	0	46.09	-	-	74	-25.91	51	101	V
2	2.55637	45.21	Pk	32	-25.1	0	52.11	-	-	74	-21.89	51	101	V
3	* 2.48351	32.76	RMS	31.9	-25.2	5.09	44.55	54	-9.45	-	-	51	101	V
4	2.54803	33.21	RMS	32	-25.1	5.09	45.2	54	-8.8	-	-	51	101	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

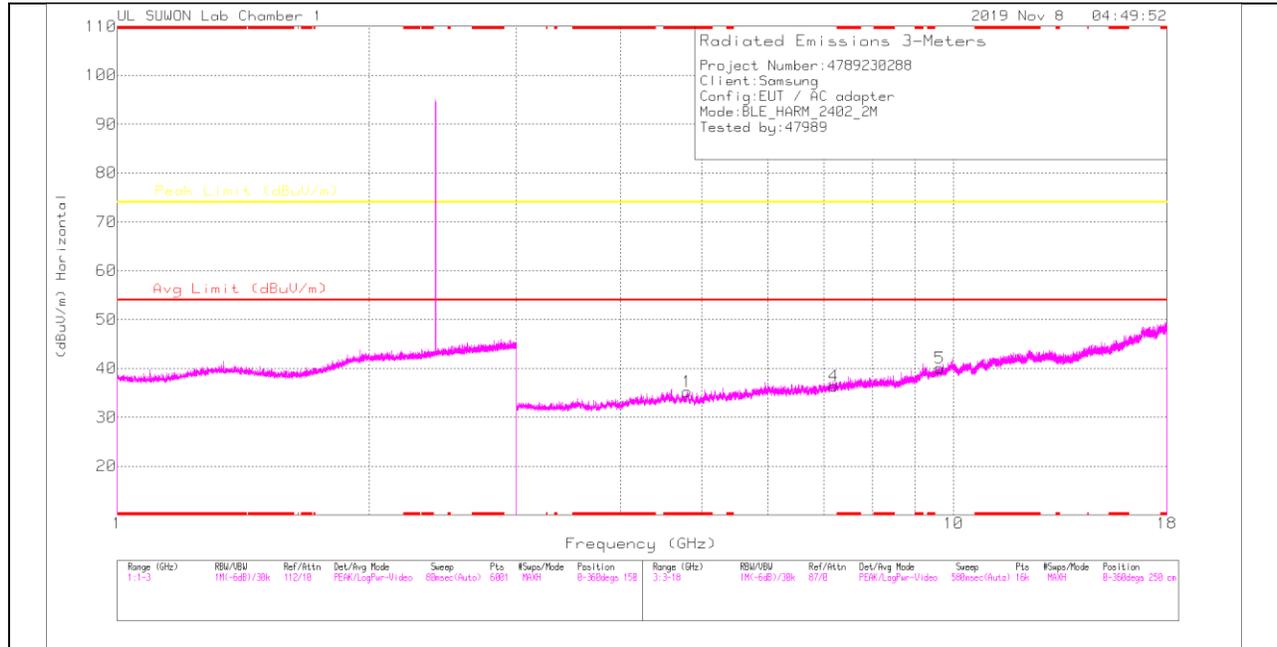

LOW CHANNEL VERTICAL

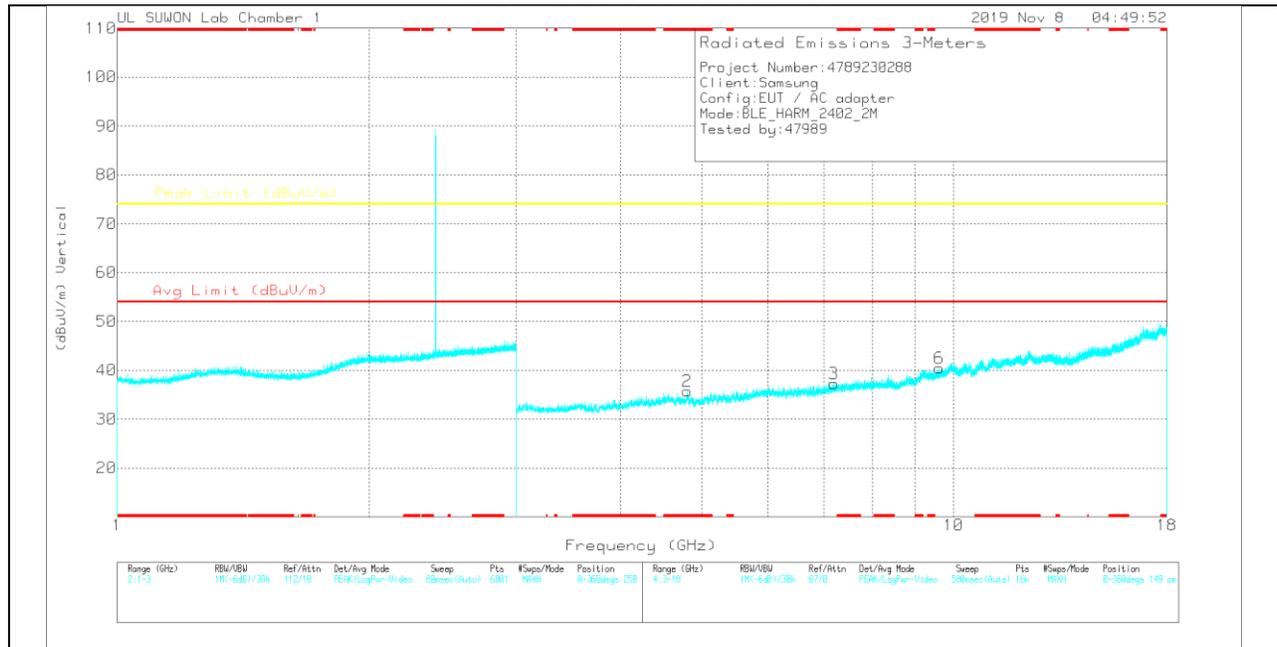

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.8027	32.68	PK	34.2	-31.6	0	35.28	-	-	74	-38.72	0-360	250	H
4	7.19692	28.41	PK	35.8	-27.8	0	36.41	-	-	74	-37.59	0-360	250	H
5	9.62865	26.23	PK	37	-23.1	0	40.13	-	-	74	-33.87	0-360	150	H
2	* 4.8027	33.15	PK	34.2	-31.6	0	35.75	-	-	74	-38.25	0-360	149	V
3	7.1913	29.23	PK	35.8	-27.8	0	37.23	-	-	74	-36.77	0-360	250	V
6	9.62021	26.5	PK	37	-23.1	0	40.4	-	-	74	-33.6	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.80481	41.63	PK2	34.2	-31.5	0	44.33	-	-	74	-29.67	360	100	H
* 4.80139	41.51	PK2	34.2	-31.6	0	44.11	-	-	74	-29.89	360	100	V
7.2019	37.77	PK2	35.8	-27.8	0	45.77	-	-	74	-28.23	360	100	H
7.20742	37.28	PK2	35.8	-27.8	0	45.28	-	-	74	-28.72	360	100	V
9.60752	35.62	PK2	37	-23.2	0	49.42	-	-	74	-24.58	360	100	H
9.6091	34.19	PK2	37	-23.2	0	47.99	-	-	74	-26.01	360	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

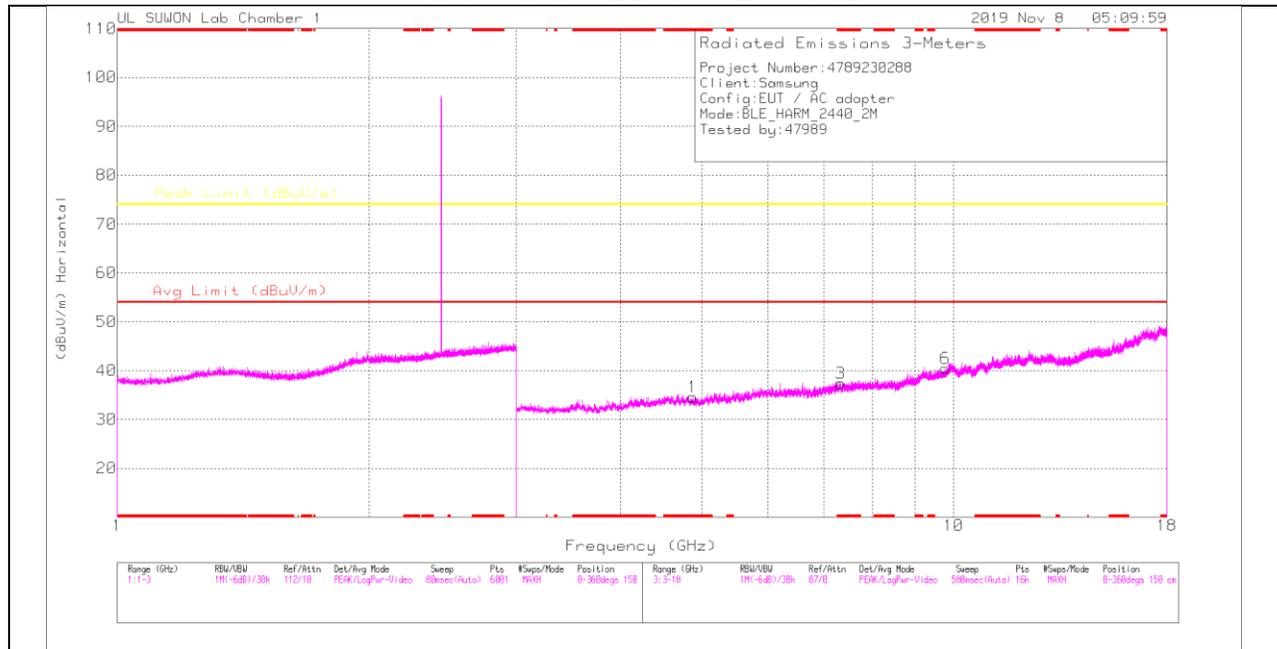

MID CHANNEL VERTICAL

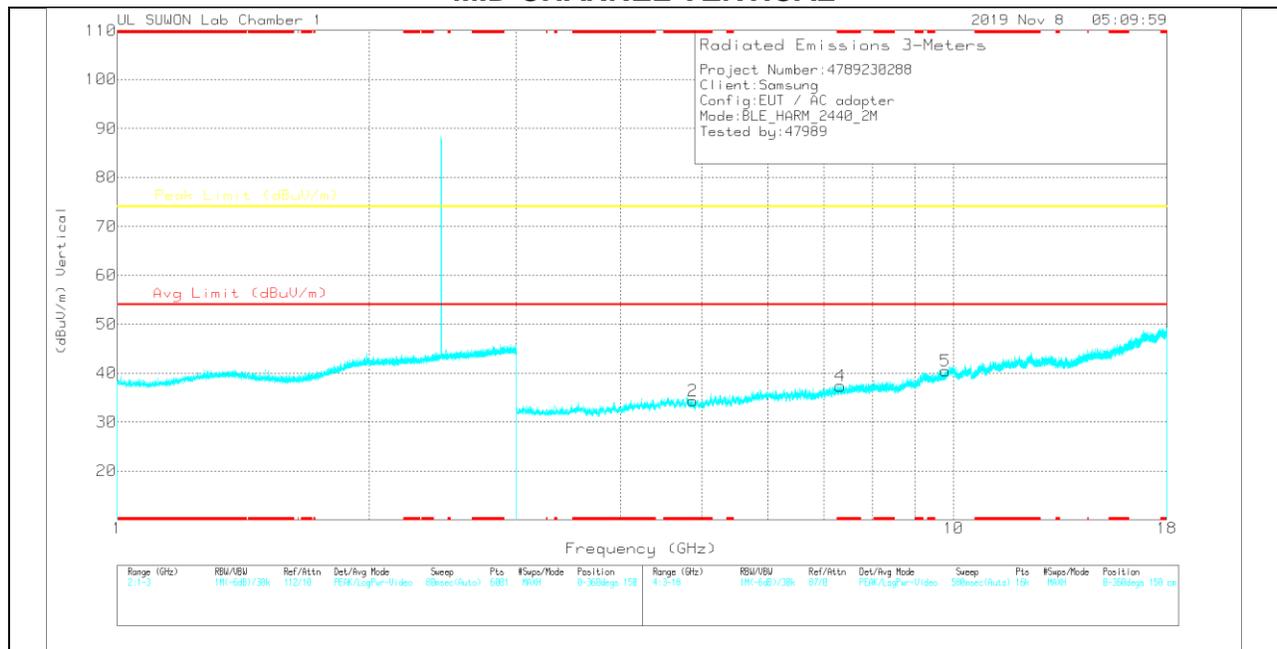

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.87863	32.02	PK	34.2	-31.6	0	34.62	-	-	74	-39.38	0-360	150	H
3	* 7.33473	29.01	PK	35.8	-27.4	0	37.41	-	-	74	-36.59	0-360	250	H
6	9.7777	27.01	PK	37.3	-23.9	0	40.41	-	-	74	-33.59	0-360	150	H
2	* 4.87863	31.75	PK	34.2	-31.6	0	34.35	-	-	74	-39.65	0-360	150	V
4	* 7.32442	28.84	PK	35.8	-27.3	0	37.34	-	-	74	-36.66	0-360	150	V
5	9.77582	27.02	PK	37.3	-23.9	0	40.42	-	-	74	-33.58	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak Detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.87577	41.06	PK2	34.2	-31.5	0	43.76	-	-	74	-30.24	360	100	H
* 4.88428	40.67	PK2	34.2	-31.6	0	43.27	-	-	74	-30.73	360	100	V
* 7.32	37.5	PK2	35.8	-27.2	0	46.1	-	-	74	-27.9	360	100	H
* 7.31813	38.05	PK2	35.8	-27.3	0	46.55	-	-	74	-27.45	360	100	V
9.76252	34.56	PK2	37.2	-23.9	0	47.86	-	-	74	-26.14	360	100	H
9.76174	34.92	PK2	37.2	-23.9	0	48.22	-	-	74	-25.78	360	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

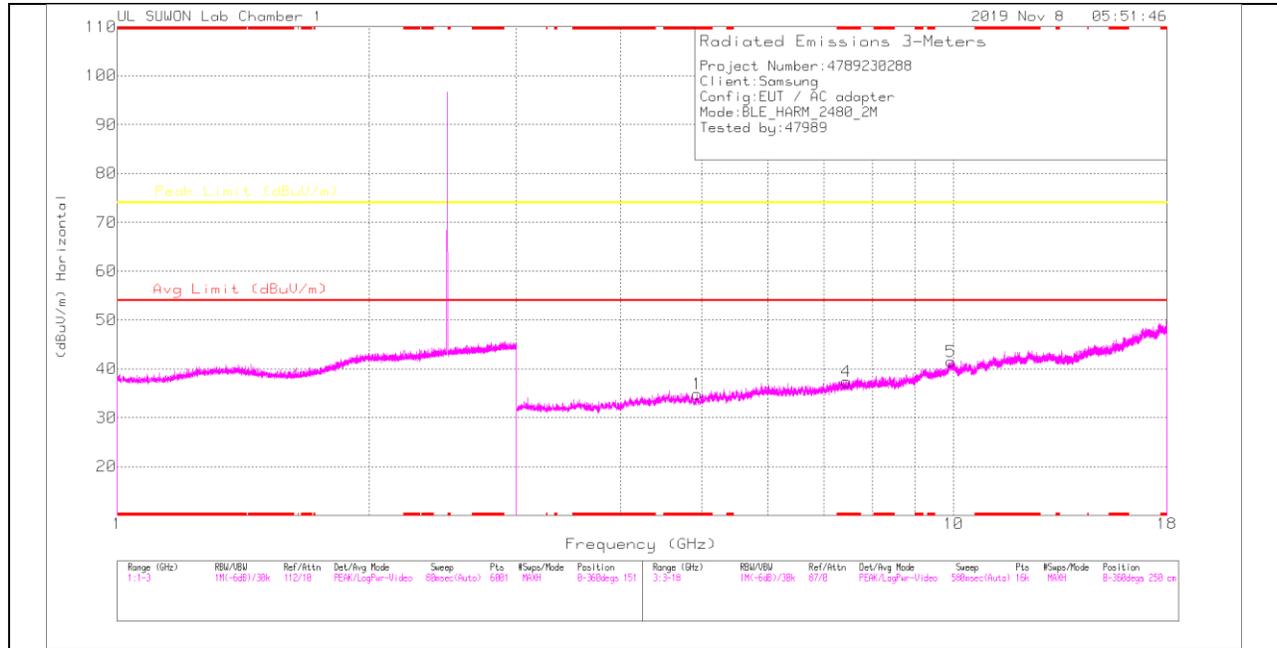

HIGH CHANNEL VERTICAL

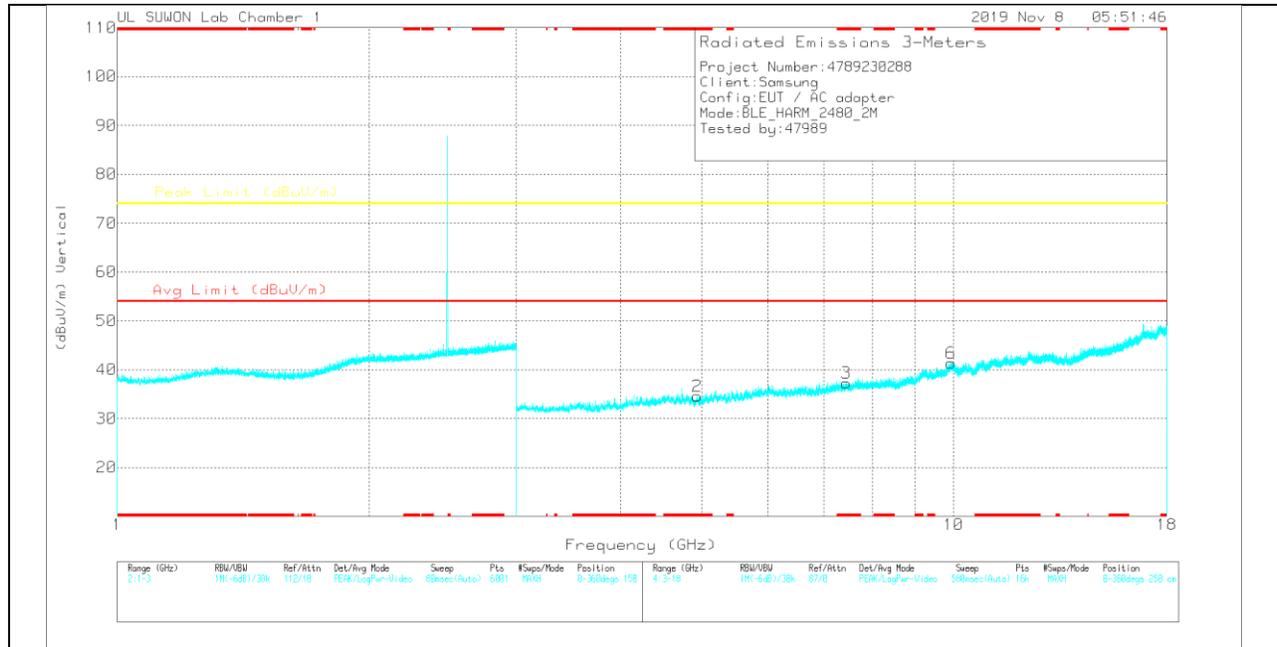

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.93957	32.23	PK	34.2	-31.6	0	34.83	-	-	74	-39.17	0-360	150	H
4	* 7.45003	28.61	PK	35.8	-27	0	37.41	-	-	74	-36.59	0-360	250	H
5	9.93238	25.48	PK	37.5	-21.5	0	41.48	-	-	74	-32.52	0-360	150	H
2	* 4.93488	32	PK	34.2	-31.6	0	34.6	-	-	74	-39.4	0-360	250	V
3	* 7.44535	28.45	PK	35.8	-27	0	37.25	-	-	74	-36.75	0-360	150	V
6	9.93613	25.31	PK	37.5	-21.5	0	41.31	-	-	74	-32.69	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.95641	40.27	PK2	34.2	-31.6	0	42.87	-	-	74	-31.13	0	100	H
* 4.95874	41.3	PK2	34.2	-31.6	0	43.9	-	-	74	-30.1	0	100	V
* 7.43686	37.03	PK2	35.8	-27.1	0	45.73	-	-	74	-28.27	0	100	H
* 7.43747	36.92	PK2	35.8	-27.1	0	45.62	-	-	74	-28.38	0	100	V
9.91553	33.49	PK2	37.5	-22.1	0	48.89	-	-	74	-25.11	0	100	H
9.91586	34.03	PK2	37.5	-22.1	0	49.43	-	-	74	-24.57	0	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).


11.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (1Mbps)

HORIZONTAL PLOT

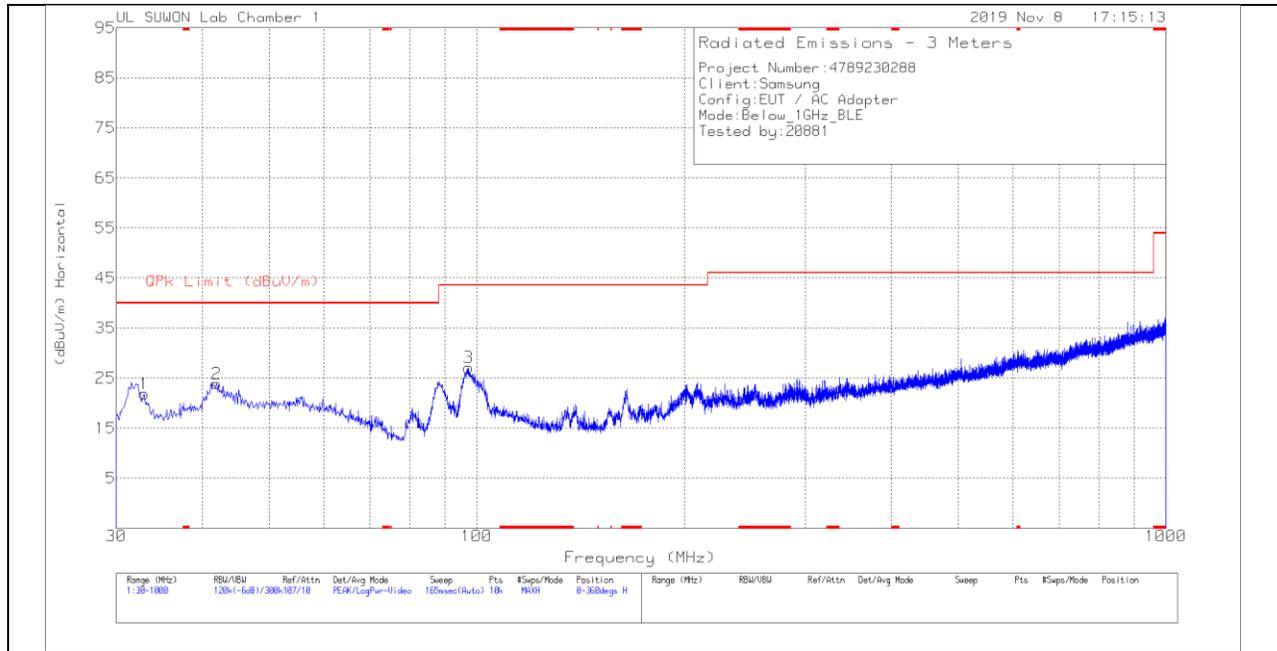

VERTICAL PLOT

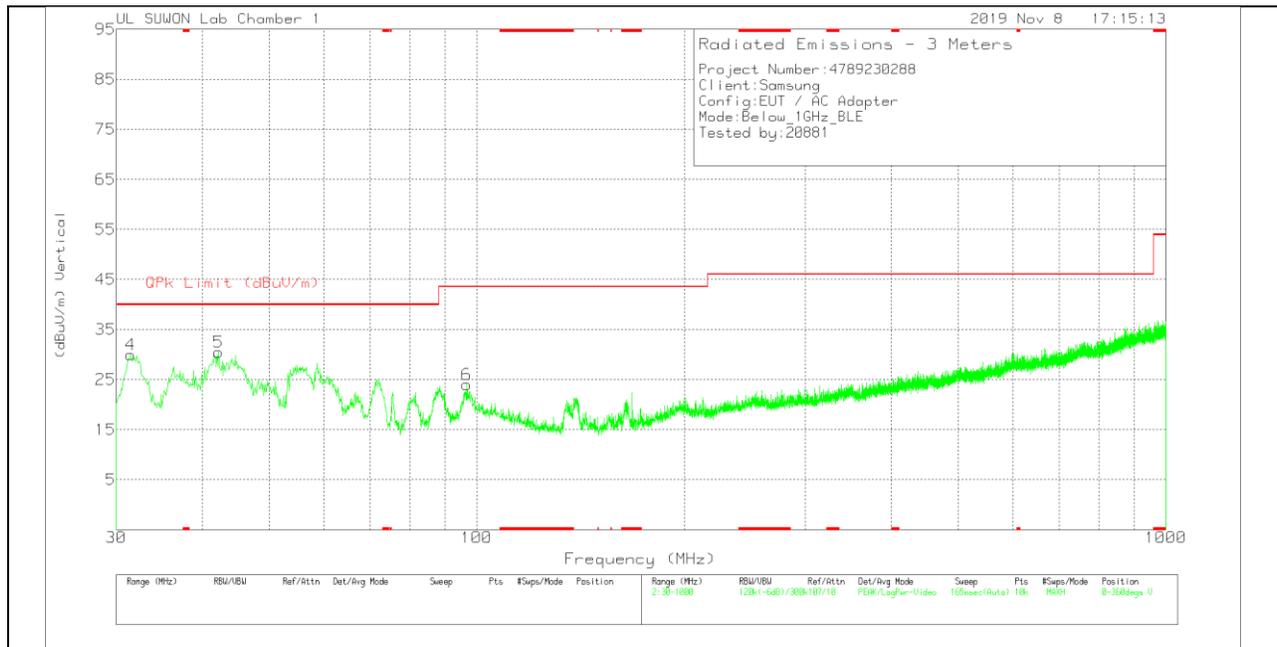

BELOW 1 GHz TABLE

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_750	Below_1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	32.91	36.16	Pk	15.7	-30	21.86	40	-18.14	0-360	300	H
2	41.931	34.56	Pk	19.1	-29.8	23.86	40	-16.14	0-360	300	H
3	97.415	38.08	Pk	17.7	-28.7	27.08	43.52	-16.44	0-360	300	H
4	31.455	44.17	Pk	15.7	-29.9	29.97	40	-10.03	0-360	100	V
5	42.222	40.84	Pk	19.2	-29.6	30.44	40	-9.56	0-360	100	V
6	96.639	35.31	Pk	17.5	-28.8	24.01	43.52	-19.51	0-360	100	V

Pk - Peak detector

12. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

WORST EMISSIONS (2Mbps)

LINE 1 PLOT

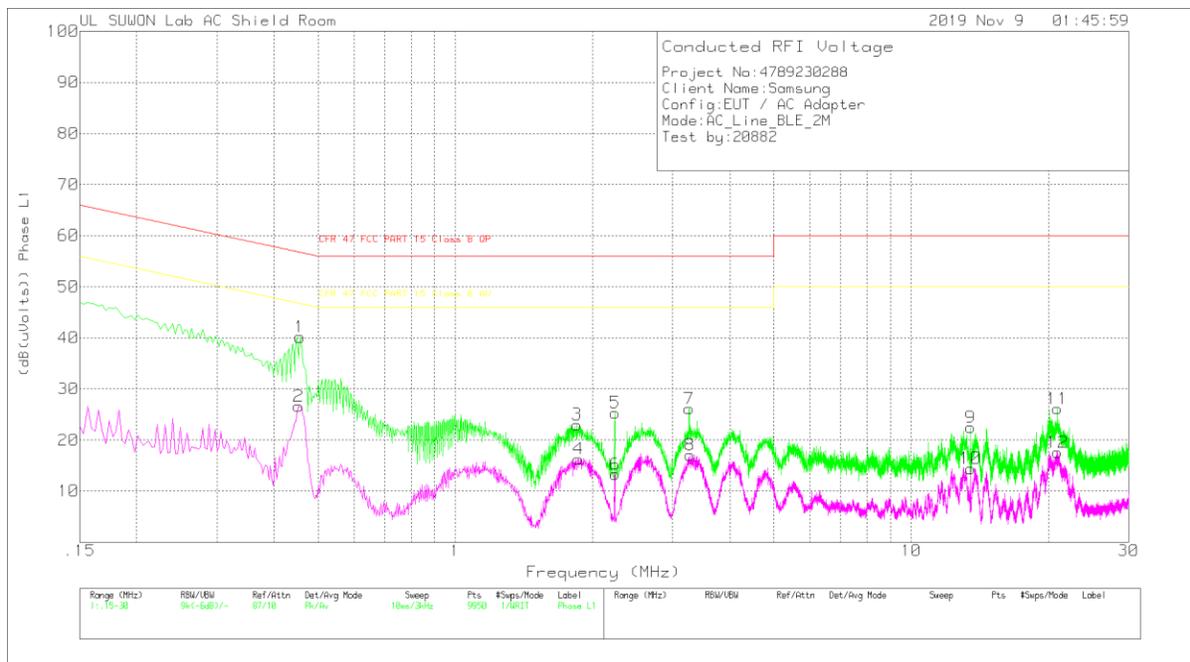

LINE 1 RESULTS


Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h Ex_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.456	30.06	Pk	9.9	.2	40.16	56.77	-16.61	-	-
2	.453	16.52	Av	9.9	.2	26.62	-	-	46.82	-20.2
3	1.848	12.91	Pk	9.8	.3	23.01	56	-32.99	-	-
4	1.863	6.19	Av	9.8	.3	16.29	-	-	46	-29.71
5	2.241	15.23	Pk	9.8	.3	25.33	56	-30.67	-	-
6	2.241	3.19	Av	9.8	.3	13.29	-	-	46	-32.71
7	3.258	16.02	Pk	9.8	.3	26.12	56	-29.88	-	-
8	3.276	6.96	Av	9.8	.3	17.06	-	-	46	-28.94
9	13.488	11.96	Pk	10.1	.4	22.46	60	-37.54	-	-
10	13.485	3.92	Av	10.1	.4	14.42	-	-	50	-35.58
11	20.94	15.42	Pk	10.3	.4	26.12	60	-33.88	-	-
12	20.946	6.85	Av	10.3	.4	17.55	-	-	50	-32.45

Pk - Peak detector
 Av - Average detection

LINE 2 PLOT

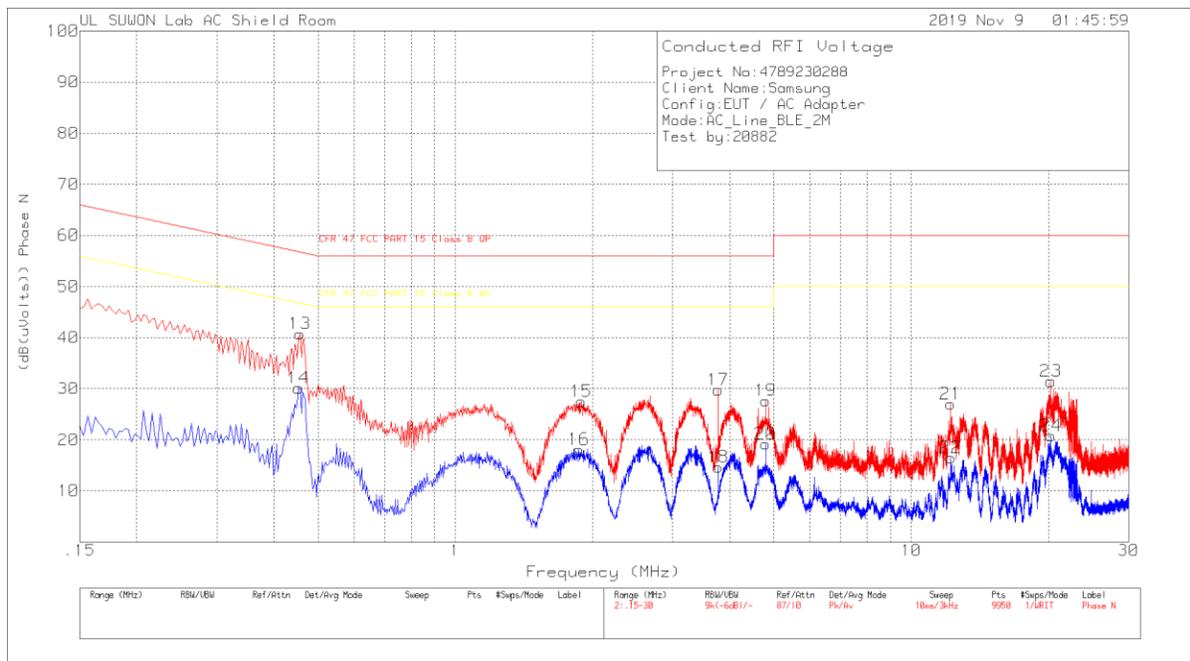

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.456	30.65	Pk	9.9	.2	40.75	56.77	-16.02	-	-
14	.453	20.03	Av	9.9	.2	30.13	-	-	46.82	-16.69
15	1.89	17.39	Pk	9.8	.3	27.49	56	-28.51	-	-
16	1.866	8	Av	9.8	.3	18.1	-	-	46	-27.9
17	3.771	19.66	Pk	9.8	.3	29.76	56	-26.24	-	-
18	3.771	4.59	Av	9.8	.3	14.69	-	-	46	-31.31
19	4.791	17.56	Pk	9.8	.3	27.66	56	-28.34	-	-
20	4.791	9.09	Av	9.8	.3	19.19	-	-	46	-26.81
21	12.207	16.71	Pk	10	.3	27.01	60	-32.99	-	-
22	12.216	6.23	Av	10	.3	16.53	-	-	50	-33.47
23	20.241	20.78	Pk	10.3	.4	31.48	60	-28.52	-	-
24	20.244	10.08	Av	10.3	.4	20.78	-	-	50	-29.22

Pk - Peak detector

Av - Average detection

END OF REPORT