



**FCC Part 1 Subpart I  
FCC Part 2 Subpart J**

**MPE EVALUATION REPORT**

**FOR**

**WPT (Wireless Power Transfer)**

**MODEL NUMBER: SM-G981B/DS, SM-G981B**

**FCC ID: A3LSMG981B**

**REPORT NUMBER: 4789230288-S2V1**

**ISSUE DATE: 12/24/2019**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.**  
**129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,**  
**GYEONGGI-DO, 16677, KOREA**

*Prepared by*

**UL Korea, Ltd.**

**26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea**

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory**  
**218 Maeyeong-ro, Yeongtong-gu,**  
**Suwon-si, Gyeonggi-do, 16675, Korea**  
**TEL: (031) 337-9902**  
**FAX: (031) 213-5433**



**Testing Laboratory**

**TL-637**

**Revision History**

Rev.	Date	Revisions	Revised By
V1	12/24/2019	Initial Issue	-

**Table of Contents**

- 1. Attestation of Test Results ..... 4**
- 2. TEST METHODOLOGY ..... 5**
- 3. Facilities and Accreditation ..... 5**
- 4. EQUIPMENT UNDER TEST ..... 5**
  - 4.1. DESCRIPTION OF EUT ..... 5
  - 4.2. WORST-CASE CONFIGURATION ..... 5
  - 4.3. KDB 680106 D01 v03 SECTION 5.b) EQUIPMENT APPROVAL CONSIDERATIONS ..... 6
  - 4.4. DESCRIPTION OF TEST SETUP ..... 6
- 5. TEST AND MEASUREMENT EQUIPMENT ..... 8**
- 6. Maximum PERMISSIBLE RF EXPOSURE ..... 9**
  - 6.1. FCC LIMITS AND SUMMARY ..... 9
    - 6.1.1. FCC LIMITS ..... 9
  - 6.2. TEST RESULTS ..... 10
    - 6.2.1. FCC RF EXPOSURE ..... 10
    - 6.2.2. FCC SUMMARY OF RESULTS ..... 12
- Appendixes ..... 13**
  - 4789230288-S2V1 FCC Report MPE\_App A\_Test Setup Photos ..... 13

## 1. Attestation of Test Results

Applicant Name	SAMSUNG ELECTRONICS CO.,LTD.	
FCC ID	A3LSMG981B	
Model Number	SM-G981B/DS, SM-G981B	
SERIAL Number	R3CM8106MBW	
Applicable Standards	FCC PART 1 SUBPART I FCC PART 2 SUBPART J KDB 680106 D01	
Date Tested	12/12/2019	
Test Results	Complies	
<p>UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.</p>		
Approved & Released By:	Prepared By:	
		
Justin Park Operations Leader UL Korea, Ltd. Suwon Laboratory	Seonggon Lee Laboratory Technician UL Korea, Ltd. Suwon Laboratory	

## 2. TEST METHODOLOGY

All calculations were made in accordance with FCC OET Bulletin 65 Edition 97-01.

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
Shield Room

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

## 4. EQUIPMENT UNDER TEST

### 4.1. DESCRIPTION OF EUT

The EUT has WPT (Wireless Power Transfer) feature which has inductive charging coil to charge phone or watch. The charging frequency is between 110 kHz to 148 kHz, and the maximum power consumption is 9.0 W in charging status.

### 4.2. WORST-CASE CONFIGURATION

Test configuration	Description
DUT to Phone test configuration 1	Charging from Phone to DUT
DUT to Phone test configuration 2	Charging from Phone to DUT (TA Charging from DUT)
DUT to Phone test configuration 3	Charging from Phone to DUT
DUT to Phone test configuration 4	Charging from Phone to DUT (TA Charging from DUT)
DUT to Watch test configuration 5	Charging from Watch to DUT
DUT to Watch test configuration 6	Charging from Watch to DUT (TA Charging from DUT)

#### Note:

Configuration 2, 4 and 6 were tested with the worst case of configuration 1, 3 and 5.

**4.3. KDB 680106 D01 v03 SECTION 5.b) EQUIPMENT APPROVAL CONSIDERATIONS**

Requirement	Device
(1) Power transfer frequency is less than 1 MHz.	Yes. Operating Frequency is between 110kHz to 148 kHz.
(2) Output power from each primary coil is less than or equal to 15 watts.	Yes. Maximum power is 9.0 Watts.
(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes.
(4) Client device is placed directly in contact with the transmitter.	Yes.
(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes.
(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes. The aggregate field at 15 cm from the device are 6.74 % of the FCC H field limit.

**4.4. DESCRIPTION OF TEST SETUP**

**SUPPORT EQUIPMENT & PERIPHERALS**

SUPPROT EQUIPMENT & PERIPHERALS LIST				
Description	Manufacturer	Model	Serial Numver	FCC ID
Phone	Samsung Electronics Co., Ltd.	SM-N975F	R38M504W9JN	A3LSMN975F
Watch	Samsung Electronics Co., Ltd.	SM-R820N	RFAM90G1V0H	A3LSMR820N
Charger	Samsung Electronics Co., Ltd.	EP-TA800	R37MOWSB411SE3	N/A
Data Cable	Samsung Electronics Co., Ltd.	EP-DN970	N/A	N/A

**TEST SETUP**


The following three modes are tested in test configurations;

Mode
Operating (SUPPORT Equipment, <10% Power Charging)
Operating (SUPPORT Equipment, 50~55% Power Charging)
Operating (SUPPORT Equipment, 90~95% Power Charging)


**MEASUREMENT TEST SETUP**

The measurement was taken using a probe placed 15 cm surrounding the device and 20 cm above the top surface of the EUT. Measurements were taken the top (charger below/above client) and all sides of the EUT per KDB680106 D01 v03 and RF Exposure Procedures (Wireless Power Transfer) in TCB Workshop October, 2018.


**DUT to phone test Configuration 1 & 2**

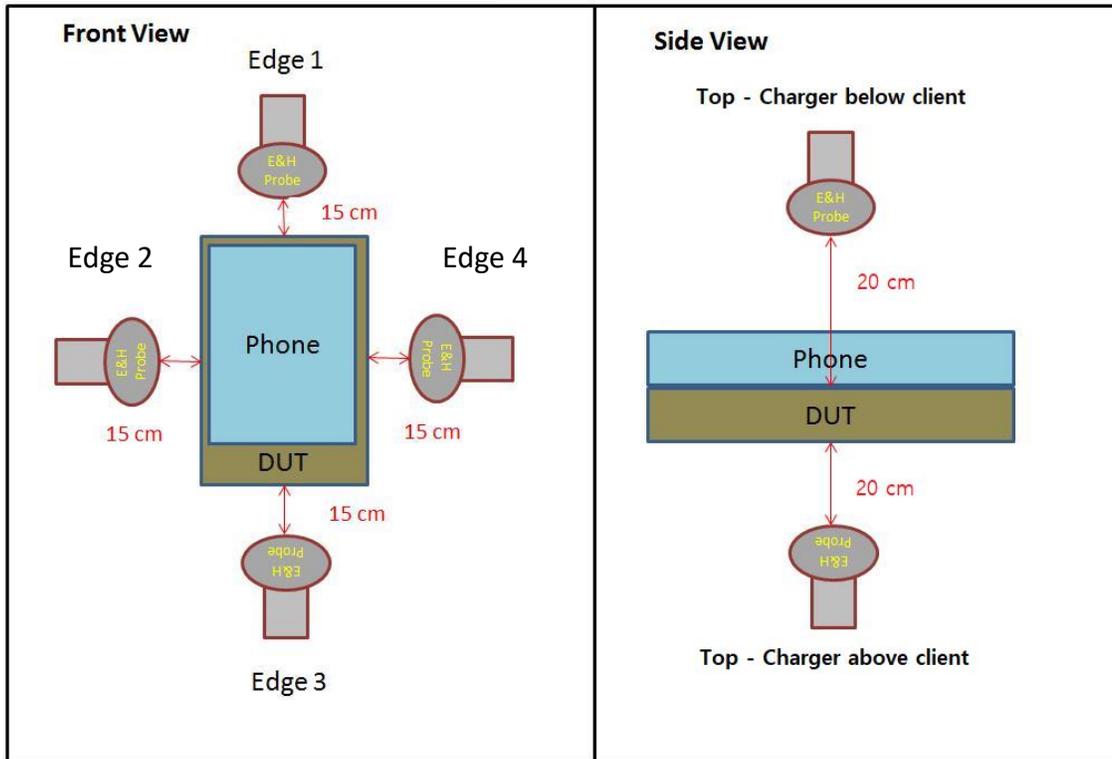

**DUT to phone test Configuration 3 & 4**

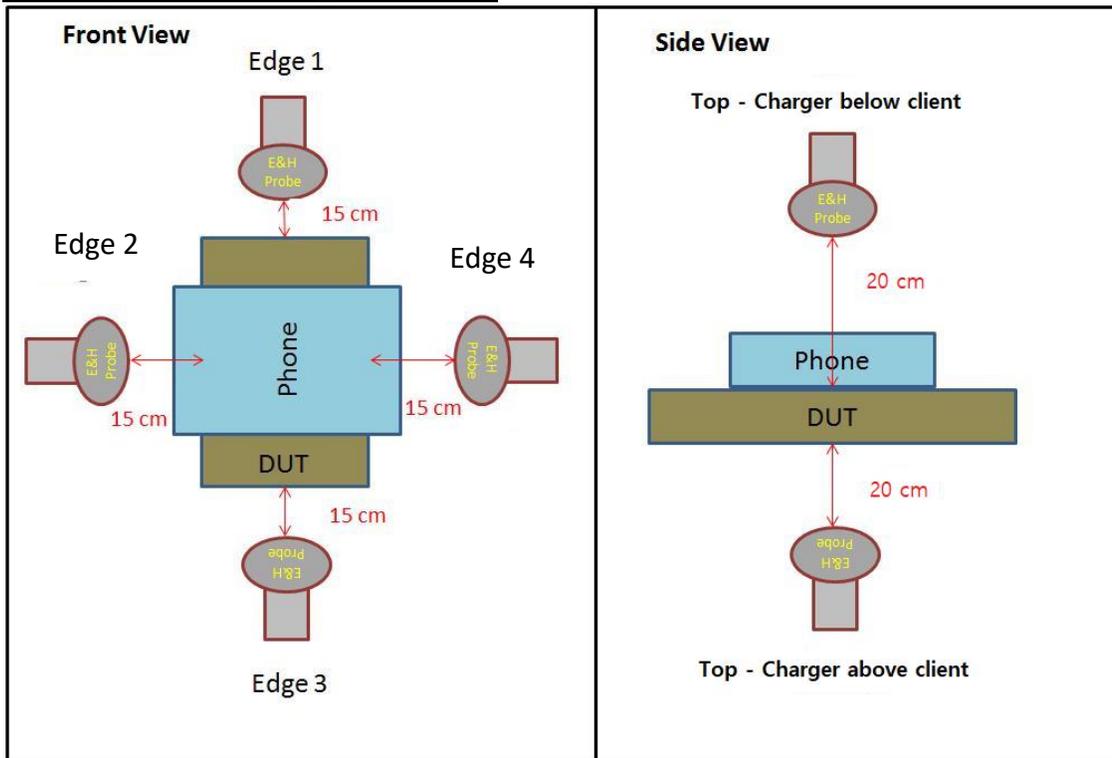

DUT to Watch test Configuration 5 & 6

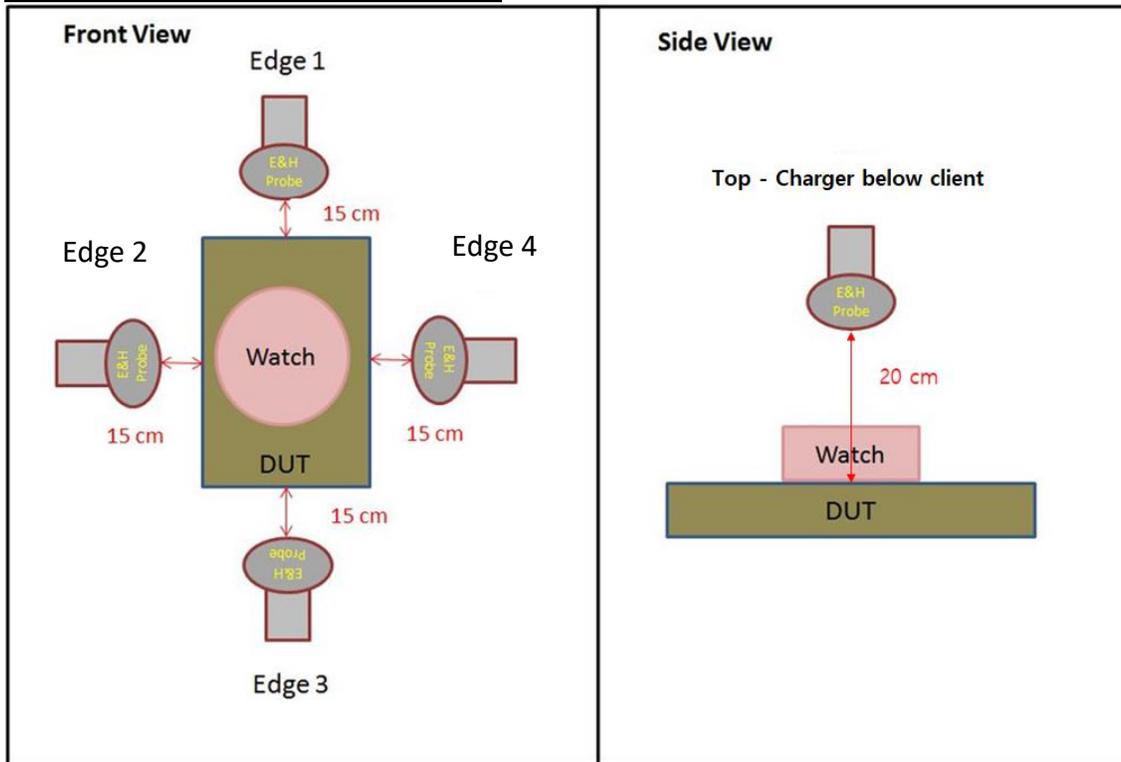

**5. TEST AND MEASUREMENT EQUIPMENT**

The following test and measurement equipment was used for the tests documented in this report;

Test Equipment List					
Description	Manufacturer	Model	Serial Numver	Cal Date	Cal Due
Electric and Magnetic Field Probe	Narda	EHP-200A	170WX80301	8-26-2019	8-26-2020

## 6. Maximum PERMISSIBLE RF EXPOSURE

### 6.1. FCC LIMITS AND SUMMARY

#### 6.1.1. FCC LIMITS

§ 1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of § 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## 6.2. TEST RESULTS

### 6.2.1. FCC RF EXPOSURE

#### H-FIELD MEASUREMENTS

Note: Peak measurement were performed. RMS values were calculated from the peak measurement. Please refer to the formula for calculating the RMS values: [Field Strength x  $\sqrt{\text{Duty Cycle}}$ ].

Additional test was performed in each Test mode by moving the probe surrounding the device to find the maximum exposure.

#### TEST results of DUT to phone test Configuration 1 & 2

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 1	Operating Real Product (Power <10% charging)	15 cm probe to edges of EUT and 20 cm probe to top surface of the EUT	Top - charger above client	1.63	0.051
			Top - charger below client		0.053
			Edge 1		0.051
			Edge 2		0.054
			Edge 3		0.053
			Edge 4		0.055
			max		0.061
	Operating Real Product (Power 50~55% charging)		Top - charger above client		0.053
			Top - charger below client		0.053
			Edge 1		0.051
			Edge 2		0.053
			Edge 3		0.051
			Edge 4		0.055
			max		0.059
	Operating Real Product (Power 90~95% charging)		Top - charger above client		0.053
			Top - charger below client		0.051
			Edge 1		0.058
			Edge 2		0.065
			Edge 3		0.051
			Edge 4		<b>0.066</b>
			max		0.066
Configuration 2	Operating Real Product (Power 90~95% charging)	Edge 4	0.053		
		max	0.053		

**TEST results of DUT to phone test Configuration 3 & 4**

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 3	Operating Real Product (Power <10% charging)	15 cm probe to edges of EUT and 20 cm probe to top surface of the EUT	Top - charger above client	1.63	0.051
			Top - charger below client		0.051
			Edge 1		0.051
			Edge 2		0.095
			Edge 3		0.052
			Edge 4		0.060
			max		0.100
	Operating Real Product (Power 50~55% charging)		Top - charger above client		0.053
			Top - charger below client		0.051
			Edge 1		0.051
			Edge 2		0.110
			Edge 3		0.051
			Edge 4		0.063
			max		<b>0.110</b>
	Operating Real Product (Power 90~95% charging)		Top - charger above client		0.051
			Top - charger below client		0.051
			Edge 1		0.051
			Edge 2		0.095
			Edge 3		0.051
			Edge 4		0.073
			max		0.096
Configuration 4	Operating Real Product (Power 50~55% charging)	Edge 2	0.095		
		max	0.095		

**TEST results of DUT to phone test Configuration 5 & 6**

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 5	Operating Real Product (Power <10% charging)	15 cm probe to edges of EUT and 20 cm probe to top surface of the EUT	Top - charger below client	1.63	0.060
			Edge 1		0.051
			Edge 2		0.051
			Edge 3		0.063
			Edge 4		0.051
			max		0.065
	Operating Real Product (Power 50~55% charging)		Top - charger below client		0.053
			Edge 1		0.053
			Edge 2		0.053
			Edge 3		0.066
			Edge 4		0.053
			max		<b>0.070</b>
	Operating Real Product (Power 90~95% charging)		Top - charger below client		0.054
			Edge 1		0.052
			Edge 2		0.051
			Edge 3		0.057
			Edge 4		0.052
			max		0.066
Configuration 6	Operating Real Product (Power 50~55% charging)	Edge 3	0.064		
		max	0.068		

**6.2.2. FCC SUMMARY OF RESULTS**

H-Field Limit		
FCC RF Exposure	Maximum meas data (A/m)	Percentage (%)
1.63	0.110	<b>6.74</b>

**Conclusion:**

H-Field result is less than 50% of the MPE limit.

## **Appendixes**

**Refer to separated files for the following appendixes.**

**4789230288-S2V1 FCC Report MPE\_App A\_Test Setup Photos**

**END OF REPORT**