



## SAR EVALUATION REPORT

**Applicant Name:**  
Samsung Electronics Co., Ltd.  
129, Samsung-ro, Maetan dong,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**  
02/10/20 - 03/17/20  
**Test Site/Location:**  
PCTEST, Columbia, MD, USA  
**Document Serial No.:**  
1M2001240012-01-R1.A3L

**FCC ID:** **A3LSMG986JPN**

**APPLICANT:** **SAMSUNG ELECTRONICS CO., LTD.**


**DUT Type:** Portable Handset  
**Application Type:** Certification  
**FCC Rule Part(s):** CFR §2.1093  
**Model:** SC-52A, SCG02, SM-G986DS

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)	10g Phablet (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.14	0.18	0.35	N/A
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	< 0.1	0.30	0.96	3.13
PCE	UMTS 850	826.40 - 846.60 MHz	0.18	0.23	0.46	N/A
PCE	LTE Band 12	699.7 - 715.3 MHz	0.11	0.18	0.23	N/A
PCE	LTE Band 13	779.5 - 784.5 MHz	0.17	0.23	0.36	N/A
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.18	0.19	0.42	N/A
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	0.16	0.71	1.22	3.15
PCE	LTE Band 41	2498.5 - 2687.5 MHz	0.10	0.37	1.07	3.00
DTS	2.4 GHz WLAN	2412 - 2472 MHz	0.57	0.13	0.39	N/A
NII	U-NII-1	5180 - 5240 MHz	N/A	N/A	N/A	N/A
NII	U-NII-2A	5260 - 5320 MHz	0.23	0.27	N/A	1.36
NII	U-NII-2C	5500 - 5720 MHz	0.24	0.26	N/A	1.17
NII	U-NII-3	5745 - 5825 MHz	0.25	0.35	0.55	N/A
DSS/DTS	Bluetooth	2402 - 2480 MHz	0.34	< 0.1	< 0.1	N/A
<b>Simultaneous SAR per KDB 690783 D01v01r03:</b>			1.05	1.56	1.59	3.80

Note: This revised test report (S/N: 1M2001240012-01-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.



This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.9 of this report; for North American frequency bands only.

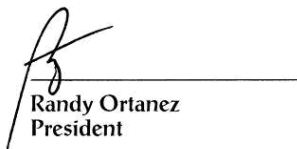I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

  
Randy Ortanez  
President






The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	Page 1 of 106	

# TABLE OF CONTENTS

1	DEVICE UNDER TEST .....	3
2	LTE INFORMATION .....	13
3	INTRODUCTION .....	14
4	DOSIMETRIC ASSESSMENT .....	15
5	DEFINITION OF REFERENCE POINTS.....	16
6	TEST CONFIGURATION POSITIONS.....	17
7	RF EXPOSURE LIMITS .....	21
8	FCC MEASUREMENT PROCEDURES.....	22
9	RF CONDUCTED POWERS .....	28
10	SYSTEM VERIFICATION.....	61
11	SAR DATA SUMMARY .....	66
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	84
13	SAR MEASUREMENT VARIABILITY .....	99
14	ADDITIONAL TESTING PER FCC GUIDANCE .....	100
15	EQUIPMENT LIST .....	102
16	MEASUREMENT UNCERTAINTIES.....	103
17	CONCLUSION.....	104
18	REFERENCES .....	105
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: SAR TISSUE SPECIFICATIONS		
APPENDIX D: SAR SYSTEM VALIDATION		
APPENDIX E: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX F: DOWNLINK LTE CA RF CONDUCTED POWERS		
APPENDIX G: POWER REDUCTION VERIFICATION		
APPENDIX H: 802.11ax RU SAR EXCLUSION		
APPENDIX I: PROBE AND DIPOLE CALIBRATION CERTIFICATES		

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT	 <b>Approved by:</b> Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	Page 2 of 106

# 1 DEVICE UNDER TEST

## 1.1 Device Overview




Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2472 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz
ANT+	Data	2402 - 2480 MHz
MST	Data	555 Hz - 8.33 kHz

## 1.2 Time-Averaging Algorithm for RF Exposure Compliance

The equipment under test (EUT) contains:

- Qualcomm® SM8250 modem supporting 2G/3G/4G WWAN technologies

Both of Qualcomm® SM8250 modem are enabled with Qualcomm® Smart Transmit feature. This feature performs time averaging algorithm in real time to control and manage transmitting power and ensure the time-averaged RF exposure is in compliance with FCC requirements all the time. Refer to Compliance Summary document for detailed description of Qualcomm® Smart Transmit feature (report SN could be found in Section 1.11 – Bibliography).

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 3 of 106

Note that WLAN operations are not enabled with Smart Transmit.

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of  $SAR_{design\_target}$ , below the predefined time-averaged power limit, for each characterized technology and band (see RF Exposure Part 0 Test Report, report SN could be found in Section 1.11 - Bibliography).

Smart Transmit allows the device to transmit at higher power instantaneously, as high as  $P_{max}$ , when needed, but enforces power limiting to maintain time-averaged transmit power to  $P_{limit}$ . Below table shows  $P_{limit}$  EFS settings and maximum tune up output power  $P_{max}$  configured for this EUT for various transmit conditions (Device State Index DSI). Note that the device uncertainty for WWAN is 1.0dB for this EUT.

Exposure Scenario:		Body-Worn	Phablet	Phablet	Head	Hotspot	Phablet	Maximum Tune-up Output Power*
Averaging Volume:		1g	10g	10g	1g	1g	10g	
Spacing:		15 mm	6, 8, 11 mm	0 mm	0 mm	10 mm	0 mm	
DSI:		0	0	1	2	3	4	
Technology/Band	Antenna	Plimit corresponding to 1mW/g ( $SAR_{design\_target}$ )						Pmax
GSM/GPRS/EDGE 850 MHz	A	31.2	31.2	29.6	32.3	29.6	29.6	24.8
GSM/GPRS/EDGE 1900 MHz	A	26.1	26.1	18.8	34.0	18.8	18.8	21.3
UMTS B5	A	30.5	30.5	26.8	31.4	26.8	26.8	23.0
LTE FDD B12	A	31.3	31.3	29.2	33.6	29.2	29.2	23.0
LTE FDD B13	A	30.4	30.4	27.4	31.7	27.4	27.4	23.0
LTE FDD B5	A	31.0	31.0	27.0	31.6	27.0	27.0	23.0
LTE FDD B4	A	25.0	25.0	19.5	31.6	19.5	19.5	22.5
LTE TDD B41	B	27.3	27.3	21.5	33.1	19.0	21.5	22.0

\*Note all  $P_{limit}$  EFS and maximum tune up output power  $P_{max}$  levels entered in above Table correspond to average power levels after accounting for duty cycle in the case of TDD modulation schemes (for e.g., GSM & LTE TDD).

\*Maximum tune up output power  $P_{max}$  is used to configure EUT during RF tune up procedure. The maximum allowed output power is equal to maximum Tune up output power + 1dB device design uncertainty.




The maximum time-averaged output power (dBm) for any 2G/3G/4G WWAN technology, band, and DSI = minimum of " $P_{limit}$  EFS" and "Maximum tune up output power  $P_{max}$ " + 1dB device uncertainty. SAR values in this report were scaled to this maximum time-averaged output power to determine compliance per KDB Publication 447498 D01v06.

The purpose of this report (Part 1 test) is to demonstrate that the EUT meets FCC SAR limits when transmitting in static transmission scenario at maximum allowable time-averaged power levels.

**Measurement Condition: All conducted power and SAR measurements in this report (Part 1 test) were performed by setting Reserve\_power\_margin (Smart Transmit EFS entry) to 0dB.**

### 1.3 Power Reduction for SAR

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 4 of 106

## 1.4 Nominal and Maximum Output Power Specifications




This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

### 1.4.1 2G/3G/4G Output Power

GSM/GPRS/EDGE 850										
Device State Index		Voice (in dBm)	Data - Burst Average GMSK (in dBm)				Data - Burst Average 8-PSK (in dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
All DSI	Max allowed power	33.0	33.0	32.0	30.0	28.0	27.5	25.5	23.5	22.5
	Nominal	32.0	32.0	31.0	29.0	27.0	26.5	24.5	22.5	21.5
GSM/GPRS/EDGE 1900										
Device State Index		Voice (in dBm)	Data - Burst Average GMSK (in dBm)				Data - Burst Average 8-PSK (in dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
DSI = 0 (Body-Worn or Phablet Max); DSI = 2 (Head)	Max allowed power	30.0	30.0	28.5	26.5	24.5	26.5	24.0	22.0	21.0
	Nominal	29.0	29.0	27.5	25.5	23.5	25.5	23.0	21.0	20.0
DSI = 3 (Hotspot)	Max allowed power	N/A	29.0	26.0	24.2	23.0	26.5	24.0	22.0	21.0
	Nominal	N/A	28.0	25.0	23.2	22.0	25.5	23.0	21.0	20.0
DSI = 1 (Phablet Reduced); DSI = 4 (Earjack)	Max allowed power	29.0	29.0	26.0	24.2	23.0	26.5	24.0	22.0	21.0
	Nominal	28.0	28.0	25.0	23.2	22.0	25.5	23.0	21.0	20.0

UMTS Band 5 (850 MHz)				
Device State Index		Modulated Average Output Power (in dBm)		
		3GPP WCDMA Rel 99	3GPP HSDPA Rel 5	3GPP HSUPA Rel 6
All DSI	Max allowed power	24.0	23.0	23.0
	Nominal	23.0	22.0	22.0

Mode / Band		Modulated Average Output Power (in dBm)			
		DSI = 0 (Body-Worn or Phablet Max)	DSI = 2 (Head)	DSI = 3 (Hotspot)	DSI = 1 (Phablet Reduced); DSI = 4 (Earjack)
LTE FDD Band 12	Max allowed power	24.0	24.0	24.0	24.0
	Nominal	23.0	23.0	23.0	23.0
LTE FDD Band 13	Max allowed power	24.0	24.0	24.0	24.0
	Nominal	23.0	23.0	23.0	23.0
LTE FDD Band 5	Max allowed power	24.0	24.0	24.0	24.0
	Nominal	23.0	23.0	23.0	23.0
LTE FDD Band 4	Max allowed power	23.5	23.5	20.5	20.5
	Nominal	22.5	22.5	19.5	19.5
LTE TDD Band 41	Max allowed power	25.0	25.0	22.0	24.5
	Nominal	24.0	24.0	21.0	23.5

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 5 of 106




## 1.4.2

## Maximum Bluetooth and SISO/MIMO WLAN Output Power

Note: Targets for 802.11ax RU operations can be found in Appendix H.

Mode	Band	IEEE 802.11 (in dBm)													
		SISO								MIMO					
		Antenna 1/ Antenna 2													
		b		g		n		ax (SU)		g (CDD + STBC)		n (CDD+STBC, SDM)		ax (SU) (CDD+STBC, SDM)	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.
2.4 GHz WIFI	2.45 GHz	19.0	18.0	18.0	17.0	18.0	17.0	17.0	16.0	21.0	20.0	21.0	20.0	17.0	16.0
		ch. 12: 13.0	12.0	ch. 11: 17.0	16.0	ch. 11: 17.0	16.0	ch. 11: 14.5	13.5	ch. 11: 20.0	19.0	ch. 11: 20.0	19.0	ch. 11: 14.5	13.5
		ch. 13: 4.0	3.0	ch. 12: 13.0	12.0	ch. 12: 13.0	12.0	ch. 12: 13.0	12.0	ch. 12: 13.0	12.0	ch. 12: 13.0	12.0	ch. 12: 13.0	12.0
		ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 13: 4.0	3.0

Mode	Band	IEEE 802.11 (in dBm)															
		SISO								MIMO							
		Antenna 1/ Antenna 2															
		a		n		ac		ax (SU)		a (CDD + STBC)		n (CDD+STBC, SDM)		ac (CDD+STBC, SDM)		ax (SU) (CDD+STBC, SDM)	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.
5 GHz WIFI (20MHz BW)	5200 MHz	18.0	17.0	18.0	17.0	18.0	17.0	16.0	15.0	21.0	20.0	21.0	20.0	21.0	20.0	16.0	15.0
		ch. 36: 16.5	15.5	ch. 36: 16.5	15.5	ch. 36: 16.5	15.5			ch. 36: 19.5	18.5	ch. 36: 19.5	18.5	ch. 36: 19.5	18.5		
	5300 MHz	18.0	17.0	18.0	17.0	18.0	17.0	16.0	15.0	21.0	20.0	21.0	20.0	21.0	20.0	16.0	15.0
		ch. 64: 16.5	15.5	ch. 64: 16.5	15.5	ch. 64: 16.5	15.5			ch. 64: 19.5	18.5	ch. 64: 19.5	18.5	ch. 64: 19.5	18.5		
	5500 MHz	18.0	17.0	18.0	17.0	18.0	17.0	16.0	15.0	21.0	20.0	21.0	20.0	21.0	20.0	16.0	15.0
		ch. 100: 16.5	15.5	ch. 100: 16.5	15.5	ch. 100: 16.5	15.5			ch. 100: 19.5	18.5	ch. 100: 19.5	18.5	ch. 100: 19.5	18.5		
	5800 MHz	18.0	17.0	18.0	17.0	18.0	17.0	16.0	15.0	21.0	20.0	21.0	20.0	21.0	20.0	16.0	15.0
5 GHz WIFI (40MHz BW)	5200 MHz			17.0	16.0	17.0	16.0	14.0	13.0			20.0	19.0	20.0	19.0	14.0	13.0
				ch. 38: 13.5	12.5	ch. 38: 13.5	12.5	ch. 38: 13.5	12.5			ch. 38: 16.5	15.5	ch. 38: 16.5	15.5	ch. 38: 13.5	12.5
	5300 MHz			17.0	16.0	17.0	16.0	14.0	13.0			20.0	19.0	20.0	19.0	14.0	13.0
				ch. 62: 13.5	12.5	ch. 62: 13.5	12.5					ch. 62: 16.5	15.5	ch. 62: 16.5	15.5		
	5500 MHz			17.0	16.0	17.0	16.0	14.0	13.0			20.0	19.0	20.0	19.0	14.0	13.0
				ch. 102: 15.0	14.0	ch. 102: 15.0	14.0					ch. 102: 18.0	17.0	ch. 102: 18.0	17.0		
	5800 MHz			17.0	16.0	17.0	16.0	14.0	13.0			20.0	19.0	20.0	19.0	14.0	13.0
5 GHz WIFI (80MHz BW)	5200 MHz					13.5	12.5	13.0	12.0					16.5	15.5	13.0	12.0
	5300 MHz					12.0	11.0	13.0	12.0					15.0	14.0	13.0	12.0
	5500 MHz					16.0	15.0	13.0	12.0					19.0	18.0	13.0	12.0
	5800 MHz					ch. 106: 13.0	12.0							ch. 106: 16.0	15.0		
						16.0	15.0	13.0	12.0					19.0	18.0	13.0	12.0

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 6 of 106

Mode / Band		Modulated Average (dBm)
Bluetooth	Maximum	15.0
	Nominal	14.0
Bluetooth EDR	Maximum	12.5
	Nominal	11.5
Bluetooth LE (2 Mbps)	Maximum	9.0
	Nominal	8.0
Bluetooth LE (1 Mbps, 125/500 Kbps)	Maximum	7.5
	Nominal	6.5

### 1.4.3 2.4 GHz Reduced WLAN Output Powers

Note: Targets for 802.11ax RU operations can be found in Appendix H

The below table is applicable in the following conditions:




- Head conditions
- Simultaneous conditions with 2.4 GHz WLAN and 5 GHz WLAN

Mode	Band	IEEE 802.11 (in dBm)													
		SISO								MIMO					
		Antenna 1/ Antenna 2													
		b		g		n		ax (SU)		g (CDD + STBC)		n (CDD+STBC, SDM)		ax (SU) (CDD+STBC, SDM)	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.
2.4 GHz WIFI	2.45 GHz	17.0	16.0	17.0	16.0	17.0	16.0	17.0	16.0	20.0	19.0	20.0	19.0	17.0	16.0
		ch. 12: 13.0	12.0	ch. 12: 13.0	12.0	ch. 12: 13.0	12.0	ch. 11: 14.5	13.5	ch. 12: 13.0	12.0	ch. 12: 13.0	12.0	ch. 11: 14.5	13.5
		ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 12: 13.0	12.0

The below table is applicable in the following conditions:

- Head conditions during simultaneous conditions with 2.4 GHz WLAN and 5 GHz WLAN

Mode	Band	IEEE 802.11 (in dBm)													
		SISO								MIMO					
		Antenna 1/ Antenna 2													
		b		g		n		ax (SU)		g (CDD + STBC)		n (CDD+STBC, SDM)		ax (SU) (CDD+STBC, SDM)	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.
2.4 GHz WIFI	2.45 GHz	14.0	13.0	14.0	13.0	14.0	13.0	14.0	13.0	17.0	16.0	17.0	16.0	17.0	16.0
		ch. 12: 13.0	12.0	ch. 12: 13.0	12.0	ch. 12: 13.0	12.0	ch. 12: 13.0	12.0	ch. 12: 13.0	12.0	ch. 12: 13.0	12.0	ch. 11: 14.5	13.5
		ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 13: 4.0	3.0	ch. 12: 13.0	12.0
														ch. 13: 4.0	3.0

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 7 of 106




## 1.4.4 5 GHz Reduced WLAN Output Powers

Note: Targets for 802.11ax RU operations can be found in Appendix H

The below table is applicable in the following conditions

- Head conditions
- Simultaneous conditions with 2.4 GHz WLAN and 5 GHz WLAN
- Head conditions during simultaneous conditions with 2.4 GHz WLAN and 5 GHz WLAN

Mode	Band	IEEE 802.11 (in dBm)															
		SISO								MIMO							
		Antenna 1/ Antenna 2															
		a		n		ac		ax (SU)		a (CDD + STBC)		n (CDD+STBC, SDM)		ac (CDD+STBC, SDM)		ax (SU) (CDD+STBC, SDM)	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.
5 GHz WIFI (20MHz BW)	5200 MHz	14.0	13.0	14.0	13.0	14.0	13.0	14.0	13.0	17.0	16.0	17.0	16.0	17.0	16.0	16.0	15.0
	5300 MHz	14.0	13.0	14.0	13.0	14.0	13.0	14.0	13.0	17.0	16.0	17.0	16.0	17.0	16.0	16.0	15.0
	5500 MHz	14.0	13.0	14.0	13.0	14.0	13.0	14.0	13.0	17.0	16.0	17.0	16.0	17.0	16.0	16.0	15.0
	5800 MHz	14.0	13.0	14.0	13.0	14.0	13.0	14.0	13.0	17.0	16.0	17.0	16.0	17.0	16.0	16.0	15.0
5 GHz WIFI (40MHz BW)	5200 MHz			14.0	13.0	14.0	13.0	14.0	13.0			17.0	16.0	17.0	16.0	14.0	13.0
				ch. 38: 13.5	12.5	ch. 38: 13.5	12.5	ch. 38: 13.5	12.5			ch. 38: 16.5	15.5	ch. 38: 16.5	15.5	ch. 38: 13.5	12.5
	5300 MHz			14.0	13.0	14.0	13.0	14.0	13.0			17.0	16.0	17.0	16.0	14.0	13.0
				ch. 62: 13.5	12.5	ch. 62: 13.5	12.5					ch. 62: 16.5	15.5	ch. 62: 16.5	15.5		
5 GHz WIFI (80MHz BW)	5500 MHz			14.0	13.0	14.0	13.0	14.0	13.0			17.0	16.0	17.0	16.0	14.0	13.0
				14.0	13.0	14.0	13.0	14.0	13.0			17.0	16.0	17.0	16.0	14.0	13.0
	5800 MHz			14.0	13.0	14.0	13.0	14.0	13.0			17.0	16.0	17.0	16.0	14.0	13.0
5 GHz WIFI (80MHz BW)	5200 MHz					13.5	12.5	13.0	12.0					16.5	15.5	13.0	12.0
	5300 MHz					12.0	11.0	13.0	12.0					15.0	14.0	13.0	12.0
	5500 MHz					14.0	13.0	13.0	12.0					17.0	16.0	13.0	12.0
	5800 MHz					ch. 106: 13.0	12.0							ch. 106: 16.0	15.0		
						14.0	13.0	13.0	12.0					17.0	16.0	13.0	12.0

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 8 of 106



## 1.5 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in APPENDIX E:. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”




**Table 1-1**  
**Device Edges/Sides for SAR Testing**

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 4 (AWS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 41	Yes	Yes	No	Yes	No	Yes
2.4 GHz WLAN Ant 1	Yes	Yes	Yes	No	No	Yes
2.4 GHz WLAN Ant 2	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN Ant 1	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN Ant 2	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN MIMO	Yes	Yes	Yes	No	No	Yes
Bluetooth	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR or phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-1, U-NII-2A, U-NII-2C operations are disabled.

## 1.6 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in APPENDIX E:.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 9 of 106

## 1.7 Simultaneous Transmission Capabilities




According to FCC KDB Publication 447498 D01v06, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

**Table 1-2**  
**Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	GSM voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
2	GSM voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
3	GSM voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	Yes	^Bluetooth Tethering is considered
4	GSM voice + 2.4 GHz Wi-Fi MIMO	Yes	Yes	N/A	Yes	
5	GSM voice + 5 GHz Wi-Fi MIMO	Yes	Yes	N/A	Yes	
6	GSM voice + 2.4 GHz Wi-Fi + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
7	GSM voice + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes^	Yes	N/A	Yes	^Bluetooth Tethering is considered
8	GSM voice + 2.4 GHz Wi-Fi MIMO + 5 GHz Wi-Fi MIMO	Yes	Yes	N/A	Yes	
9	GSM voice + 2.4 GHz Bluetooth + 5 GHz Wi-Fi MIMO	Yes^	Yes	N/A	Yes	^Bluetooth Tethering is considered
10	UMTS + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
11	UMTS + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
12	UMTS + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	Yes	^Bluetooth Tethering is considered
13	UMTS + 2.4 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
14	UMTS + 5 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
15	UMTS + 2.4 GHz Wi-Fi + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
16	UMTS + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes^	Yes	Yes^	Yes	^Bluetooth Tethering is considered
17	UMTS + 2.4 GHz Wi-Fi MIMO + 5 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
18	UMTS + 2.4 GHz Bluetooth + 5 GHz Wi-Fi MIMO	Yes^	Yes	Yes^	Yes	^Bluetooth Tethering is considered
19	LTE + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
20	LTE + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
21	LTE + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	Yes	^Bluetooth Tethering is considered
22	LTE + 2.4 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
23	LTE + 5 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
24	LTE + 2.4 GHz Wi-Fi + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
25	LTE + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes^	Yes	Yes^	Yes	^Bluetooth Tethering is considered
26	LTE + 2.4 GHz Wi-Fi MIMO + 5 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
27	LTE + 2.4 GHz Bluetooth + 5 GHz Wi-Fi MIMO	Yes^	Yes	Yes^	Yes	^Bluetooth Tethering is considered
28	GPRS/EDGE + 2.4 GHz Wi-Fi	N/A	N/A	Yes	Yes	
29	GPRS/EDGE + 5 GHz Wi-Fi	N/A	N/A	Yes	Yes	
30	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	N/A	Yes^	Yes	^Bluetooth Tethering is considered
31	GPRS/EDGE + 2.4 GHz Wi-Fi MIMO	N/A	N/A	Yes	Yes	
32	GPRS/EDGE + 5 GHz Wi-Fi MIMO	N/A	N/A	Yes	Yes	
33	GPRS/EDGE + 2.4 GHz Wi-Fi + 5 GHz Wi-Fi	N/A	N/A	Yes	Yes	
34	GPRS/EDGE + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	N/A	N/A	Yes^	Yes	^Bluetooth Tethering is considered
35	GPRS/EDGE + 2.4 GHz Wi-Fi MIMO + 5 GHz Wi-Fi MIMO	N/A	N/A	Yes	Yes	
36	GPRS/EDGE + 2.4 GHz Bluetooth + 5 GHz Wi-Fi MIMO	N/A	N/A	Yes^	Yes	^Bluetooth Tethering is considered

- 2.4 GHz WLAN and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
- 5 GHz Wireless Router is only supported for the U-NII-3 by S/W, therefore U-NII-1, U-NII-2A, and U-NII-2C were not evaluated for wireless router conditions.
- This device supports 2x2 MIMO Tx for WLAN 802.11a/g/n/ac/ax. 802.11a/g/n/ac/ax supports CDD and STBC and 802.11n/ac/ax additionally supports SDM. Each WLAN antenna can transmit independently or together when operating with MIMO.
- This device supports VOLTE.
- This device supports VOWIFI.
- This device supports Bluetooth Tethering.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 10 of 106

## 1.8 Miscellaneous SAR Test Considerations

### (A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WIFI, only 2.4 GHz and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

This device supports IEEE 802.11ax with the following features:

- a) Up to 80 MHz Bandwidth only for 5 GHz
- b) Up to 20 MHz Bandwidth only for 2.4 GHz
- c) No aggregate channel configurations
- d) 2 Tx antenna output
- e) Up to 1024 QAM is supported
- f) TDWR and Band gap channels are supported for 5 GHz
- g) MU-MIMO UL Operations are not supported

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-1, U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

Per April 2019 TCB Workshop Notes, SAR testing was not required for 802.11ax when applying the initial test configuration procedures of KDB 248227, with 802.11ax considered a higher order 802.11 mode.

### (B) Licensed Transmitter(s)




GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. The downlink carrier aggregation exclusion analysis can be found in Appendix F.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information).

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 11 of 106

This device supports downlink 4x4 MIMO operations for LTE Band 41. Per May 2017 TCB Workshop Notes, SAR for 4x4 DL MIMO was not needed since the maximum average output power in 4x4 DL MIMO mode was not more than 0.25 dB higher than the maximum output power with 4x4 DL MIMO inactive. Additionally, SAR for 4x4 MIMO Downlink Carrier Aggregation was not needed since the maximum average output power in 4x4 MIMO Downlink Carrier Aggregation mode was not more than 0.25 dB higher than the maximum output power with 4x4 MIMO Downlink and downlink carrier aggregation inactive.

This device supports LTE Carrier Aggregation (CA) for LTE Band 41, with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per 2017 Fall TCB Workshop Notes.

This device supports 64QAM on the uplink and 256QAM on the downlink for LTE Operations. Conducted powers for 64QAM uplink configurations were measured per Section 5.1 of FCC KDB Publication 941225D05v02r05. SAR was not required for 64QAM since the highest maximum output power for 64QAM and is  $\leq \frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$ W/kg, per Section 5.2.4 of FCC KDB Publication 941225 D05v02r05.

## 1.9 Guidance Applied




- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- FCC KDB Publication 616217 D04v01r02 (Proximity Sensor)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)
- April 2019 TCB Workshop Notes (IEEE 802.11ax, Dynamic Antenna Tuning)

## 1.10 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.



## 1.11 Bibliography

Report Type	Report Serial Number
RF Exposure Part 0 Test Report	1M2001240012-19-R1.A3L
RF Exposure Part 2 Test Report	1M2001240012-20-R1.A3L
RF Exposure Compliance Summary Report	1M2001240012-21-R1.A3L

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 12 of 106

## 2 LTE INFORMATION

LTE Information					
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 13: 5 MHz, 10 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)	715.3 (23173)	
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)	714.5 (23165)	
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)	713.5 (23155)	
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)	711 (23130)	
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)	784.5 (23255)	
LTE Band 13: 10 MHz	N/A		782 (23230)	N/A	
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)		836.5 (20525)	848.3 (20643)	
LTE Band 5 (Cell): 3 MHz	825.5 (20415)		836.5 (20525)	847.5 (20635)	
LTE Band 5 (Cell): 5 MHz	826.5 (20425)		836.5 (20525)	846.5 (20625)	
LTE Band 5 (Cell): 10 MHz	829 (20450)		836.5 (20525)	844 (20600)	
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)	1754.3 (20393)	
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)	1753.5 (20385)	
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)	1752.5 (20375)	
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)	1750 (20350)	
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)	1747.5 (20325)	
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)	1745 (20300)	
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	DL UE Cat 20, UL UE Cat 18				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 15. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 15 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WIFI Offloading, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 13 of 106

### 3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

#### 3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1**  
**SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$




**SAR is expressed in units of Watts per Kilogram (W/kg).**

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT	 <b>Approved by:</b> Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	Page 14 of 106




## 4 DOSIMETRIC ASSESSMENT

### 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.





**Figure 4-1**  
**Sample SAR Area Scan**

**Table 4-1**  
**Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04\***


Frequency	Maximum Area Scan Resolution (mm) ( $\Delta x_{\text{area}}, \Delta y_{\text{area}}$ )	Maximum Zoom Scan Resolution (mm) ( $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$ )	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

\*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 15 of 106	

### 5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 5-1**  
Close-Up Side view  
of ERP

### 5.2 HANDSET REFERENCE POINTS



Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

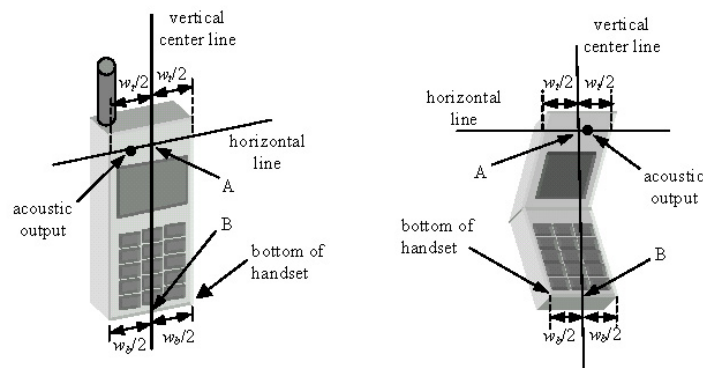

**Figure 5-2**  
Front, back and side view of SAM Twin Phantom



**Figure 5-3**  
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 16 of 106



## 6 TEST CONFIGURATION POSITIONS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

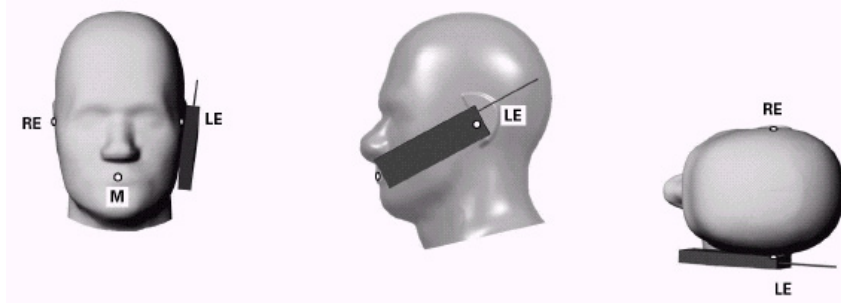





Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

### 6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 17 of 106



contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

## 6.6 Extremity Exposure Configurations




Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

## 6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 19 of 106

## 6.8 Phablet Configurations




For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna  $\leq 25$  mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR > 1.2 W/kg.

## 6.9 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a nonreduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included in Appendix G.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	Page 20 of 106	

## 7 RF EXPOSURE LIMITS

### 7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.




### 7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1**  
**SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
<b>Peak Spatial Average SAR</b> Head	1.6	8.0
<b>Whole Body SAR</b>	0.08	0.4
<b>Peak Spatial Average SAR</b> Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 21 of 106	

## 8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

### 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

### 8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is  $\leq 0.25$  dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is  $\leq 1.2$  W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

### 8.3 Procedures Used to Establish RF Signal for SAR




The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

### 8.4 SAR Measurement Conditions for UMTS

#### 8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT	 <b>Approved by:</b> Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	Page 22 of 106



## 8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

## 8.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH<sub>n</sub> configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH<sub>n</sub>, for the highest reported SAR configuration in 12.2 kbps RMC.

## 8.4.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

## 8.4.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

## 8.5 SAR Measurement Conditions for LTE




LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT	 <b>Approved by:</b> Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	Page 23 of 106

### 8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

### 8.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:




- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is  $< 0.8$  W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to  $\frac{1}{2}$  dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is  $< 1.45$  W/kg.

### 8.5.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

### 8.5.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for downlink only carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT	 <b>Approved by:</b> Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	Page 24 of 106



## 8.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

### 8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 8.6.2 U-NII-1 and U-NII-2A




For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is  $> 1.2$  W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is  $> 1.2$  W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

### 8.6.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 25 of 106

### 8.6.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n/ax OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.




### 8.6.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. Per April 2019 TCB Workshop guidance, 802.11ax was considered the highest order 802.11 mode. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

### 8.6.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.6.6). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.




FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT	 <b>Approved by:</b> Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	Page 26 of 106

### 8.6.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.6.9 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6$  W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: A3LSMG986JPN	 Proud to be part of 	SAR EVALUATION REPORT	 Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	Page 27 of 106

## 9 RF CONDUCTED POWERS



### 9.1 GSM Conducted Powers

Table 9-1  
Measured  $P_{max}$

Maximum Burst-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	32.49	32.50	31.30	29.21	27.16	26.56	25.24	22.91	22.18
	190	32.56	32.60	31.28	29.30	27.45	26.40	25.15	22.98	21.89
	251	32.35	32.40	31.08	29.05	27.20	26.24	24.96	22.83	21.70
GSM 1900	512	29.18	29.23	27.56	24.80	23.00	24.97	23.10	21.07	19.70
	661	29.40	29.60	27.67	25.05	23.22	25.24	23.15	21.01	19.98
	810	29.31	29.55	27.70	25.09	23.26	25.21	23.20	21.10	19.80

Calculated Maximum Frame-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	23.29	23.30	25.11	24.78	23.98	17.36	19.05	18.48	19.00
	190	23.36	23.40	25.09	24.87	24.27	17.20	18.96	18.55	18.71
	251	23.15	23.20	24.89	24.62	24.02	17.04	18.77	18.40	18.52
GSM 1900	512	19.98	20.03	21.37	20.37	19.82	15.77	16.91	16.64	16.52
	661	20.20	20.40	21.48	20.62	20.04	16.04	16.96	16.58	16.80
	810	20.11	20.35	21.51	20.66	20.08	16.01	17.01	16.67	16.62

GSM 850	Frame Avg.Targets:	22.80	22.80	24.81	24.57	23.82	17.30	18.31	18.07	18.32
GSM 1900		19.80	19.80	21.31	21.07	20.32	16.30	16.81	16.57	16.82

FCC ID: A3LSMG986JPN	 <div>Proud to be part of  element</div>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	Page 28 of 106	

**Table 9-2**  
**Measured  $P_{limit}$  for DSI = 3 (Hotspot mode), DSI = 1 (Phablet with grip sensor active) and/or DSI = 4 (Earjack active)**

Maximum Burst-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 1900	512	28.37	28.40	24.94	23.04	21.81	24.97	23.10	21.07	19.70
	661	28.54	28.64	25.13	23.30	22.18	25.24	23.15	21.01	19.98
	810	28.57	28.62	24.97	23.22	22.12	25.21	23.20	21.10	19.80

Calculated Maximum Frame-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 1900	512	19.17	19.20	18.75	18.61	18.63	15.77	16.91	16.64	16.52
	661	19.34	19.44	18.94	18.87	19.00	16.04	16.96	16.58	16.80
	810	19.37	19.42	18.78	18.79	18.94	16.01	17.01	16.67	16.62

GSM 1900	Frame Avg. Targets:	18.80	18.80	18.81	18.77	18.82	16.30	16.81	16.57	16.82
----------	---------------------	-------	-------	-------	-------	-------	-------	-------	-------	-------



Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8-PSK modulation do not have an impact on output power.

**GSM Class: B**  
**GPRS Multislot class: 33 (Max 4 Tx uplink slots)**  
**EDGE Multislot class: 33 (Max 4 Tx uplink slots)**  
**DTM Multislot Class: N/A**



**Figure 9-1**  
**Power Measurement Setup**

FCC ID: A3LSMG986JPN	 Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	Page 29 of 106	


## 9.2 UMTS Conducted Powers

**Table 9-3**  
**Measured  $P_{max}$**



3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	
99	WCDMA	12.2 kbps RMC	23.28	23.31	23.13	-
99		12.2 kbps AMR	23.26	23.31	23.14	-
6	HSDPA	Subtest 1	22.51	22.33	22.28	0
6		Subtest 2	22.61	22.32	22.30	0
6		Subtest 3	22.18	22.04	21.89	0.5
6		Subtest 4	22.19	22.01	21.89	0.5
6	HSUPA	Subtest 1	22.66	22.49	22.35	0
6		Subtest 2	20.64	20.53	20.39	2
6		Subtest 3	21.63	21.51	21.38	1
6		Subtest 4	20.64	20.52	20.35	2
6		Subtest 5	22.68	22.56	22.40	0

This device does not support DC-HSDPA.

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.



**Figure 9-2**  
**Power Measurement Setup**

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 30 of 106

## 9.3 LTE Conducted Powers



### 9.3.1

### LTE Band 12

Table 9-4  
LTE Band 12 Measured  $P_{max}$  for all DSI - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.41	0	0
	1	25	23.34		0
	1	49	23.27		0
	25	0	22.37	0-1	1
	25	12	22.49		1
	25	25	22.34		1
	50	0	22.33		1
16QAM	1	0	22.83	0-1	1
	1	25	22.74		1
	1	49	22.76		1
	25	0	21.30	0-2	2
	25	12	21.46		2
	25	25	21.27		2
	50	0	21.28		2
64QAM	1	0	21.73	0-2	2
	1	25	21.63		2
	1	49	21.68		2
	25	0	20.36	0-3	3
	25	12	20.54		3
	25	25	20.28		3
	50	0	20.30		3

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 31 of 106

**Table 9-5**  
**LTE Band 12 Measured  $P_{max}$  for all DSI - 5 MHz Bandwidth**

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.04	23.13	23.02	0	0
	1	12	23.13	23.12	23.06		0
	1	24	23.08	23.11	23.12		0
	12	0	22.21	22.20	22.23	0-1	1
	12	6	22.31	22.34	22.29		1
	12	13	22.25	22.27	22.28		1
	25	0	22.30	22.27	22.25		1
16QAM	1	0	22.31	22.12	22.49	0-1	1
	1	12	22.35	22.18	22.52		1
	1	24	22.33	22.17	22.47		1
	12	0	21.37	21.33	21.38	0-2	2
	12	6	21.40	21.42	21.42		2
	12	13	21.36	21.38	21.35		2
	25	0	21.32	21.28	21.21		2
64QAM	1	0	21.32	21.17	21.46	0-2	2
	1	12	21.32	21.21	21.50		2
	1	24	21.32	21.17	21.45		2
	12	0	20.34	20.30	20.34	0-3	3
	12	6	20.41	20.42	20.39		3
	12	13	20.33	20.36	20.36		3
	25	0	20.31	20.28	20.22		3

**Table 9-6**  
**LTE Band 12 Measured  $P_{max}$  for all DSI - 3 MHz Bandwidth**




LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.03	23.18	23.09	0	0
	1	7	23.01	23.16	23.08		0
	1	14	23.05	23.14	23.14		0
	8	0	22.24	22.24	22.22	0-1	1
	8	4	22.28	22.27	22.28		1
	8	7	22.29	22.28	22.24		1
	15	0	22.26	22.29	22.29		1
16QAM	1	0	22.78	22.70	22.81	0-1	1
	1	7	22.74	22.71	22.78		1
	1	14	22.80	22.75	22.80		1
	8	0	21.13	21.28	21.08	0-2	2
	8	4	21.16	21.35	21.12		2
	8	7	21.12	21.32	21.09		2
	15	0	21.30	21.33	21.28		2
64QAM	1	0	21.75	21.72	21.80	0-2	2
	1	7	21.72	21.66	21.73		2
	1	14	21.78	21.77	21.78		2
	8	0	20.12	20.28	20.09	0-3	3
	8	4	20.20	20.38	20.15		3
	8	7	20.13	20.33	20.10		3
	15	0	20.31	20.33	20.27		3

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 32 of 106	



**Table 9-7**  
**LTE Band 12 Measured  $P_{max}$  for all DSI -1.4 MHz Bandwidth**

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.98	23.15	23.08	0	0
	1	2	23.03	23.20	23.19		0
	1	5	23.05	23.26	23.17		0
	3	0	23.07	23.04	22.96		0
	3	2	23.11	23.09	23.05		0
	3	3	23.08	23.06	23.02		0
	6	0	22.20	22.22	22.15	0-1	1
16QAM	1	0	22.67	22.43	22.56	0-1	1
	1	2	22.78	22.52	22.70		1
	1	5	22.73	22.49	22.67		1
	3	0	22.24	22.11	22.31		1
	3	2	22.27	22.25	22.39		1
	3	3	22.27	22.20	22.36		1
	6	0	21.17	21.09	21.06	0-2	2
64QAM	1	0	21.66	21.45	21.58	0-2	2
	1	2	21.75	21.49	21.70		2
	1	5	21.68	21.51	21.59		2
	3	0	21.25	21.11	21.28		2
	3	2	21.28	21.25	21.39		2
	3	3	21.26	21.18	21.35		2
	6	0	20.19	20.09	20.06	0-3	3

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 33 of 106	

## 9.3.2

## LTE Band 13

Table 9-8  
LTE Band 13 Measured  $P_{max}$  for all DSI - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	<b>23.23</b>	0	0
	1	25	23.04		0
	1	49	23.12		0
	25	0	22.30	0-1	1
	25	12	<b>22.32</b>		1
	25	25	22.24		1
	50	0	22.22		1
16QAM	1	0	22.72	0-1	1
	1	25	22.79		1
	1	49	22.80		1
	25	0	21.42	0-2	2
	25	12	21.41		2
	25	25	21.21		2
	50	0	21.18		2
64QAM	1	0	21.46	0-2	2
	1	25	21.74		2
	1	49	21.45		2
	25	0	20.22	0-3	3
	25	12	20.36		3
	25	25	20.31		3
	50	0	20.21		3

FCC ID: A3LSMG986JPN



SAR EVALUATION REPORT



Approved by:  
Quality Manager

Document S/N:

Test Dates:

DUT Type:

1M2001240012-01-R1.A3L

02/10/20 - 03/17/20




Portable Handset

Page 34 of 106

**Table 9-9**  
**LTE Band 13 Measured  $P_{max}$  for all DSI - 5 MHz Bandwidth**

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.04	0	0
	1	12	23.11		0
	1	24	23.06		0
	12	0	22.33	0-1	1
	12	6	22.36		1
	12	13	22.30		1
	25	0	22.30		1
16QAM	1	0	22.46	0-1	1
	1	12	22.49		1
	1	24	22.39		1
	12	0	21.33	0-2	2
	12	6	21.38		2
	12	13	21.32		2
	25	0	21.35		2
64QAM	1	0	21.39	0-2	2
	1	12	21.46		2
	1	24	21.43		2
	12	0	20.36	0-3	3
	12	6	20.38		3
	12	13	20.34		3
	25	0	20.36		3

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 35 of 106	




### 9.3.3

### LTE Band 5 (Cell)

Table 9-10  
LTE Band 5 (Cell) Measured  $P_{max}$  for all DSI - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	<b>23.43</b>	0	0
	1	25	23.06		0
	1	49	23.17		0
	25	0	22.33	0-1	1
	25	12	<b>22.38</b>		1
	25	25	22.34		1
	50	0	22.33		1
16QAM	1	0	22.67	0-1	1
	1	25	22.72		1
	1	49	22.82		1
	25	0	21.33	0-2	2
	25	12	21.40		2
	25	25	21.33		2
	50	0	21.20		2
64QAM	1	0	21.83	0-2	2
	1	25	21.53		2
	1	49	21.30		2
	25	0	20.35	0-3	3
	25	12	20.47		3
	25	25	20.45		3
	50	0	20.30		3

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.




FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 36 of 106

**Table 9-11**  
**LTE Band 5 (Cell) Measured  $P_{max}$  for all DSI - 5 MHz Bandwidth**

LTE Band 5 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.17	23.14	22.92	0	0
	1	12	23.09	23.01	22.97		0
	1	24	23.08	23.01	22.98		0
	12	0	22.25	22.16	22.13	0-1	1
	12	6	22.30	22.27	22.27		1
	12	13	22.28	22.22	22.19		1
	25	0	22.29	22.24	22.19		1
16QAM	1	0	22.68	22.42	22.31	0-1	1
	1	12	22.77	22.41	22.47		1
	1	24	22.77	22.40	22.40		1
	12	0	21.30	21.23	21.15	0-2	2
	12	6	21.39	21.32	21.21		2
	12	13	21.33	21.29	21.19		2
	25	0	21.29	21.25	21.30		2
64QAM	1	0	21.68	21.37	21.33	0-2	2
	1	12	21.77	21.38	21.50		2
	1	24	21.76	21.38	21.40		2
	12	0	20.30	20.24	20.16	0-3	3
	12	6	20.41	20.30	20.25		3
	12	13	20.31	20.29	20.18		3
	25	0	20.30	20.26	20.32		3




**Table 9-12**  
**LTE Band 5 (Cell) Measured  $P_{max}$  for all DSI - 3 MHz Bandwidth**

LTE Band 5 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.11	23.08	23.04	0	0
	1	7	23.14	23.16	23.03		0
	1	14	23.18	23.13	23.08		0
	8	0	22.30	22.18	22.16	0-1	1
	8	4	22.30	22.23	22.22		1
	8	7	22.29	22.23	22.20		1
	15	0	22.29	22.23	22.13		1
16QAM	1	0	22.93	22.44	22.80	0-1	1
	1	7	22.92	22.45	22.80		1
	1	14	22.98	22.48	22.82		1
	8	0	21.28	21.13	21.12	0-2	2
	8	4	21.32	21.17	21.24		2
	8	7	21.27	21.15	21.17		2
	15	0	21.47	21.32	21.33		2
64QAM	1	0	21.89	21.38	21.78	0-2	2
	1	7	21.94	21.47	21.82		2
	1	14	21.97	21.50	21.85		2
	8	0	20.26	20.12	20.13	0-3	3
	8	4	20.32	20.20	20.21		3
	8	7	20.26	20.18	20.17		3
	15	0	20.48	20.29	20.34		3

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 37 of 106	

**Table 9-13**  
**LTE Band 5 (Cell) Measured  $P_{max}$  for all DSI -1.4 MHz Bandwidth**

LTE Band 5 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.11	23.06	23.05	0	0
	1	2	23.21	23.18	23.10		0
	1	5	23.17	23.11	23.03		0
	3	0	23.22	23.05	23.11		0
	3	2	23.21	23.14	23.14		0
	3	3	23.22	23.11	23.11		0
	6	0	22.24	22.19	22.13		0-1
16QAM	1	0	22.45	22.26	22.41	0-1	1
	1	2	22.57	22.44	22.45		1
	1	5	22.52	22.36	22.41		1
	3	0	22.16	22.29	22.07		1
	3	2	22.19	22.36	22.11		1
	3	3	22.17	22.35	22.09		1
	6	0	21.11	21.29	21.05		0-2
64QAM	1	0	21.42	21.35	21.40	0-2	2
	1	2	21.54	21.40	21.44		2
	1	5	21.51	21.39	21.38		2
	3	0	21.21	21.28	21.06		2
	3	2	21.21	21.40	21.14		2
	3	3	21.15	21.39	21.08		2
	6	0	20.14	20.30	20.02		0-3

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 38 of 106	

### 9.3.4




### LTE Band 4 (AWS)

Table 9-14

LTE Band 4 (AWS) Measured  $P_{max}$  for DSI = 2 (Head) or DSI = 0 (Body-worn, or Phablet with grip sensor not triggered) - 20 MHz Bandwidth

LTE Band 4 (AWS) 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20175 (1732.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	22.59	0	0
	1	50	<b>22.90</b>		0
	1	99	22.75		0
	50	0	21.89	0-1	1
	50	25	<b>22.02</b>		1
	50	50	22.01		1
	100	0	21.95		1
16QAM	1	0	21.80	0-1	1
	1	50	22.25		1
	1	99	22.11		1
	50	0	20.95	0-2	2
	50	25	20.99		2
	50	50	21.09		2
	100	0	20.99		2
64QAM	1	0	20.79	0-2	2
	1	50	21.19		2
	1	99	21.06		2
	50	0	19.94	0-3	3
	50	25	20.06		3
	50	50	20.11		3
	100	0	19.97		3

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 39 of 106

**Table 9-15**  
**LTE Band 4 (AWS) Measured  $P_{max}$  for DSI = 2 (Head) or DSI = 0 (Body-worn, or Phablet with grip sensor not triggered) - 15 MHz Bandwidth**

LTE Band 4 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.40	22.67	22.83	0	0
	1	36	22.71	22.98	23.01		0
	1	74	22.63	22.90	22.84		0
	36	0	21.89	22.01	22.09	0-1	1
	36	18	22.06	22.20	22.22		1
	36	37	22.05	22.17	22.18		1
	75	0	21.96	22.03	22.13		1
16QAM	1	0	21.82	22.07	22.05	0-1	1
	1	36	22.11	22.34	22.26		1
	1	74	22.04	22.22	22.13		1
	36	0	20.94	21.07	21.11	0-2	2
	36	18	21.16	21.28	21.29		2
	36	37	21.09	21.23	21.21		2
	75	0	21.00	21.11	21.15		2
64QAM	1	0	20.82	21.06	21.05	0-2	2
	1	36	21.11	21.35	21.25		2
	1	74	21.06	21.22	21.12		2
	36	0	19.92	20.11	20.13	0-3	3
	36	18	20.17	20.27	20.30		3
	36	37	20.14	20.22	20.22		3
	75	0	19.98	20.10	20.16		3

**Table 9-16**  
**LTE Band 4 (AWS) Measured  $P_{max}$  for DSI = 2 (Head) or DSI = 0 (Body-worn, or Phablet with grip sensor not triggered) - 10 MHz Bandwidth**

LTE Band 4 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.31	22.47	22.54	0	0
	1	25	22.59	22.77	22.84		0
	1	49	22.38	22.56	22.55		0
	25	0	21.63	21.81	21.82	0-1	1
	25	12	21.80	22.00	21.99		1
	25	25	21.70	21.89	21.85		1
	50	0	21.71	21.82	21.79		1
16QAM	1	0	22.02	21.83	22.26	0-1	1
	1	25	22.18	22.25	22.20		1
	1	49	22.01	21.94	22.34		1
	25	0	20.64	20.80	20.86	0-2	2
	25	12	20.83	20.97	21.02		2
	25	25	20.75	20.88	20.90		2
	50	0	20.75	20.83	20.83		2
64QAM	1	0	20.96	20.94	21.26	0-2	2
	1	25	21.20	21.26	21.25		2
	1	49	21.05	20.94	21.41		2
	25	0	19.65	19.80	19.82	0-3	3
	25	12	19.80	20.00	20.00		3
	25	25	19.72	19.86	19.91		3
	50	0	19.77	19.84	19.84		3



FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 40 of 106	



Table 9-17




LTE Band 4 (AWS) Measured  $P_{max}$  for DSI = 2 (Head) or DSI = 0 (Body-worn, or Phablet with grip sensor not triggered) - 5 MHz Bandwidth

LTE Band 4 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.43	22.70	22.76	0	0
	1	12	22.54	22.83	22.81		0
	1	24	22.44	22.70	22.64		0
	12	0	21.77	21.94	22.02	0-1	1
	12	6	21.79	21.99	22.01		1
	12	13	21.71	21.92	21.96		1
	25	0	21.75	21.94	21.95		1
16QAM	1	0	21.87	22.35	22.10	0-1	1
	1	12	21.96	22.43	22.12		1
	1	24	21.92	22.36	22.03		1
	12	0	20.77	20.95	21.04	0-2	2
	12	6	20.78	21.07	21.05		2
	12	13	20.71	21.00	20.95		2
	25	0	20.83	20.95	21.01		2
64QAM	1	0	20.91	21.33	21.09	0-2	2
	1	12	20.98	21.43	21.12		2
	1	24	20.93	21.34	21.02		2
	12	0	19.77	19.98	20.04	0-3	3
	12	6	19.79	20.06	20.05		3
	12	13	19.72	19.99	19.98		3
	25	0	19.83	19.95	19.97		3

Table 9-18

LTE Band 4 (AWS) Measured  $P_{max}$  for DSI = 2 (Head) or DSI = 0 (Body-worn, or Phablet with grip sensor not triggered) - 3 MHz Bandwidth

LTE Band 4 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.53	22.83	22.77	0	0
	1	7	22.58	22.84	22.78		0
	1	14	22.61	22.78	22.79		0
	8	0	21.78	21.96	21.95	0-1	1
	8	4	21.80	21.99	21.98		1
	8	7	21.76	21.91	21.95		1
	15	0	21.75	21.95	21.91		1
16QAM	1	0	21.97	22.26	22.37	0-1	1
	1	7	21.95	22.19	22.38		1
	1	14	21.99	22.17	22.39		1
	8	0	20.70	20.96	21.05	0-2	2
	8	4	20.71	20.99	21.13		2
	8	7	20.65	20.90	21.10		2
	15	0	20.80	21.08	21.02		2
64QAM	1	0	20.95	21.33	21.32	0-2	2
	1	7	20.93	21.27	21.38		2
	1	14	20.98	21.29	21.36		2
	8	0	19.73	19.97	20.06	0-3	3
	8	4	19.71	19.98	20.14		3
	8	7	19.65	19.90	20.10		3
	15	0	19.80	20.08	19.99		3

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 41 of 106

**Table 9-19**  
**LTE Band 4 (AWS) Measured  $P_{max}$  for DSI = 2 (Head) or DSI = 0 (Body-worn, or Phablet with grip sensor not triggered) -1.4 MHz Bandwidth**

LTE Band 4 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.52	22.73	22.79	0	0
	1	2	22.65	22.79	22.83		0
	1	5	22.60	22.71	22.74		0
	3	0	22.57	22.80	22.85		0
	3	2	22.61	22.84	22.87		0
	3	3	22.57	22.78	22.84		0
	6	0	21.70	21.92	21.96	0-1	1
16QAM	1	0	21.82	22.36	22.21	0-1	1
	1	2	21.93	22.37	22.23		1
	1	5	21.83	22.29	22.16		1
	3	0	21.83	22.06	21.81		1
	3	2	21.90	22.11	21.82		1
	3	3	21.87	22.05	21.76		1
	6	0	20.83	21.11	20.78	0-2	2
64QAM	1	0	20.79	21.02	21.18	0-2	2
	1	2	20.90	21.09	21.19		2
	1	5	20.85	21.00	21.15		2
	3	0	20.83	20.77	20.82		2
	3	2	20.89	20.81	20.86		2
	3	3	20.85	20.74	20.77		2
	6	0	19.84	19.83	19.78	0-3	3




FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 42 of 106	

Table 9-20

LTE Band 4 (AWS) Measured  $P_{limit}$  for DSI = 3 (Hotspot mode), DSI = 1 (Phablet with grip sensor active) and/or DSI = 4 (Earjack active) - 20 MHz Bandwidth

LTE Band 4 (AWS) 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20175 (1732.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	19.61	0	0
	1	50	<b>19.91</b>		0
	1	99	19.84		0
	50	0	19.84	0-1	0
	50	25	<b>20.04</b>		0
	50	50	20.02		0
	100	0	19.90		0
16QAM	1	0	20.01	0-1	0
	1	50	20.28		0
	1	99	20.12		0
	50	0	20.10	0-2	0
	50	25	20.14		0
	50	50	20.18		0
	100	0	20.08		0
64QAM	1	0	19.82	0-2	0
	1	50	20.07		0
	1	99	20.00		0
	50	0	19.88	0-3	0
	50	25	19.80		0
	50	50	20.10		0
	100	0	20.04		0

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.




FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 43 of 106

Table 9-21

LTE Band 4 (AWS) Measured  $P_{limit}$  for DSI = 3 (Hotspot mode), DSI = 1 (Phablet with grip sensor active) and/or DSI = 4 (Earjack active) - 15 MHz Bandwidth

LTE Band 4 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.82	19.80	19.90	0	0
	1	36	20.10	20.09	20.11		0
	1	74	19.93	19.88	19.90		0
	36	0	19.95	20.05	20.06	0-1	0
	36	18	20.13	20.18	20.18		0
	36	37	20.09	20.20	20.21		0
	75	0	20.06	20.05	20.04		0
16QAM	1	0	19.94	19.89	20.30	0-1	0
	1	36	20.15	20.25	20.41		0
	1	74	20.03	20.04	20.31		0
	36	0	19.96	20.07	20.13	0-2	0
	36	18	20.12	20.19	20.20		0
	36	37	20.12	20.23	20.20		0
	75	0	20.05	20.07	20.13		0
64QAM	1	0	20.32	20.02	19.76	0-2	0
	1	36	20.29	20.37	19.98		0
	1	74	20.30	20.21	19.90		0
	36	0	20.04	20.16	20.17	0-3	0
	36	18	20.18	20.25	20.25		0
	36	37	20.19	20.30	20.27		0
	75	0	20.12	20.06	20.18		0

Table 9-22

LTE Band 4 (AWS) Measured  $P_{limit}$  for DSI = 3 (Hotspot mode), DSI = 1 (Phablet with grip sensor active) and/or DSI = 4 (Earjack active) - 10 MHz Bandwidth

LTE Band 4 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.72	19.62	19.63	0	0
	1	25	19.68	19.85	19.90		0
	1	49	19.98	19.59	19.69		0
	25	0	20.02	19.89	19.92	0-1	0
	25	12	19.97	20.00	20.02		0
	25	25	19.81	19.92	19.93		0
	50	0	20.03	19.88	19.92		0
16QAM	1	0	20.11	20.06	19.72	0-1	0
	1	25	19.65	20.36	19.94		0
	1	49	19.96	20.08	19.63		0
	25	0	19.80	19.94	20.02	0-2	0
	25	12	20.03	20.04	20.07		0
	25	25	19.90	19.95	20.04		0
	50	0	19.81	19.93	19.87		0
64QAM	1	0	19.44	19.78	19.87	0-2	0
	1	25	19.98	19.83	20.32		0
	1	49	19.67	19.51	19.98		0
	25	0	19.82	19.98	19.96	0-3	0
	25	12	20.03	20.08	20.05		0
	25	25	19.95	20.04	19.99		0
	50	0	19.86	19.92	19.94		0

FCC ID: A3LSMG986JPN



## SAR EVALUATION REPORT



Approved by:  
Quality Manager

Document S/N:  
1M2001240012-01-R1.A3L

Test Dates:  
02/10/20 - 03/17/20

DUT Type:  
Portable Handset

Page 44 of 106

Table 9-23

LTE Band 4 (AWS) Measured  $P_{limit}$  for DSI = 3 (Hotspot mode), DSI = 1 (Phablet with grip sensor active) and/or DSI = 4 (Earjack active) - 5 MHz Bandwidth

LTE Band 4 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.66	19.85	19.73	0	0
	1	12	19.75	19.99	19.85		0
	1	24	19.88	19.92	19.75		0
	12	0	19.89	19.98	19.97	0-1	0
	12	6	19.94	20.00	20.10		0
	12	13	19.87	20.02	19.96		0
	25	0	19.90	19.97	20.04		0
16QAM	1	0	19.81	20.30	19.98	0-1	0
	1	12	19.94	20.27	20.10		0
	1	24	19.85	20.25	19.99		0
	12	0	19.96	20.07	20.08	0-2	0
	12	6	20.04	20.09	20.16		0
	12	13	19.94	20.08	20.06		0
	25	0	19.85	20.05	20.05		0
64QAM	1	0	20.17	20.16	20.01	0-2	0
	1	12	20.29	20.23	20.18		0
	1	24	20.22	20.07	20.09		0
	12	0	19.98	19.99	20.04	0-3	0
	12	6	20.02	20.05	20.12		0
	12	13	19.95	19.96	20.04		0
	25	0	19.93	20.03	20.01		0

Table 9-24

LTE Band 4 (AWS) Measured  $P_{limit}$  for DSI = 3 (Hotspot mode), DSI = 1 (Phablet with grip sensor active) and/or DSI = 4 (Earjack active) - 3 MHz Bandwidth

LTE Band 4 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.66	19.89	19.93	0	0
	1	7	19.66	19.87	19.88		0
	1	14	19.99	19.86	19.83		0
	8	0	19.86	19.95	20.06	0-1	0
	8	4	19.85	19.95	20.08		0
	8	7	19.85	19.97	20.01		0
	15	0	19.91	19.96	20.08		0
16QAM	1	0	19.61	20.31	20.07	0-1	0
	1	7	19.56	20.40	19.97		0
	1	14	20.12	20.32	19.89		0
	8	0	19.87	20.05	20.11	0-2	0
	8	4	19.89	20.06	20.05		0
	8	7	19.83	20.08	20.06		0
	15	0	19.85	19.98	20.13		0
64QAM	1	0	19.96	19.75	20.24	0-2	0
	1	7	20.00	19.80	20.23		0
	1	14	19.93	19.80	20.19		0
	8	0	19.88	20.03	20.12	0-3	0
	8	4	19.94	20.11	20.13		0
	8	7	19.88	20.10	20.09		0
	15	0	19.91	20.00	20.08		0

FCC ID: A3LSMG986JPN



SAR EVALUATION REPORT



Approved by:  
Quality Manager

Document S/N:  
1M2001240012-01-R1.A3L

Test Dates:  
02/10/20 - 03/17/20




DUT Type:  
Portable Handset

Page 45 of 106

Table 9-25

LTE Band 4 (AWS) Measured  $P_{limit}$  for DSI = 3 (Hotspot mode), DSI = 1 (Phablet with grip sensor active) and/or DSI = 4 (Earjack active) -1.4 MHz Bandwidth

LTE Band 4 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.60	19.75	19.88	0	0
	1	2	19.73	19.86	19.90		0
	1	5	19.65	19.75	19.81		0
	3	0	19.70	19.82	19.90		0
	3	2	19.74	19.94	19.91		0
	3	3	19.69	19.86	19.87		0
	6	0	19.74	19.87	19.94	0-1	0
16QAM	1	0	20.08	19.66	20.29	0-1	0
	1	2	20.19	19.74	20.39		0
	1	5	20.10	19.72	20.27		0
	3	0	20.05	19.97	20.24		0
	3	2	20.11	20.12	20.34		0
	3	3	20.03	20.05	20.25		0
	6	0	19.70	20.07	19.85	0-2	0
64QAM	1	0	20.09	20.04	20.17	0-2	0
	1	2	19.72	20.09	19.89		0
	1	5	19.58	20.09	19.74		0
	3	0	19.90	19.91	20.06		0
	3	2	19.98	20.03	20.10		0
	3	3	19.91	19.99	20.06		0
	6	0	20.12	20.03	20.26	0-3	0

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 46 of 106

### 9.3.5




### LTE Band 41

**Table 9-26**  
**LTE Band 41 Measured  $P_{max}$  for DSI = 2 (Head) or DSI = 0 (Body-worn, or Phablet with grip sensor not triggered) - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.54	23.67	23.57	23.74	23.44	0	0
	1	50	23.44	23.61	23.86	23.85	23.78		0
	1	99	23.44	23.66	23.54	23.36	23.66		0
	50	0	22.63	22.64	22.78	22.92	22.72	0-1	1
	50	25	22.54	22.79	22.97	22.96	22.94		1
	50	50	22.57	22.73	22.93	22.84	22.86		1
	100	0	22.53	22.70	22.87	22.91	22.87		1
16QAM	1	0	22.63	22.72	22.54	22.80	22.48	0-1	1
	1	50	22.47	22.59	22.92	22.94	22.93		1
	1	99	22.46	22.73	22.60	22.94	22.85		1
	50	0	21.61	21.73	21.78	21.95	21.74	0-2	2
	50	25	21.62	21.78	21.96	22.02	21.96		2
	50	50	21.54	21.75	21.89	21.81	21.93		2
	100	0	21.52	21.67	21.92	21.94	21.95		2
64QAM	1	0	21.33	21.37	21.19	21.40	21.11	0-2	2
	1	50	21.17	21.41	21.60	21.61	21.53		2
	1	99	21.13	21.38	21.27	21.12	21.45		2
	50	0	20.62	20.70	20.82	20.97	20.73	0-3	3
	50	25	20.63	20.87	20.97	21.01	20.98		3
	50	50	20.57	20.74	20.94	20.86	20.94		3
	100	0	20.51	20.69	20.91	20.90	20.84		3

**Table 9-27**  
**LTE Band 41 Measured  $P_{max}$  for DSI = 2 (Head) or DSI = 0 (Body-worn, or Phablet with grip sensor not triggered) - 15 MHz Bandwidth**

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.51	23.36	23.44	23.68	23.40	0	0
	1	36	23.55	23.60	23.56	23.90	23.62		0
	1	74	23.47	23.32	23.56	23.58	23.67		0
	36	0	22.62	22.51	22.64	22.82	22.65	0-1	1
	36	18	22.66	22.66	22.84	22.93	22.85		1
	36	37	22.62	22.59	22.79	22.82	22.86		1
	75	0	22.56	22.56	22.72	22.83	22.76		1
16QAM	1	0	22.46	22.78	22.67	22.53	22.80	0-1	1
	1	36	22.54	22.56	22.78	22.74	23.10		1
	1	74	22.48	22.26	22.76	22.45	22.96		1
	36	0	21.70	21.58	21.60	21.81	21.62	0-2	2
	36	18	21.71	21.72	21.77	21.97	21.80		2
	36	37	21.67	21.64	21.72	21.83	21.78		2
	75	0	21.59	21.60	21.75	21.85	21.80		2
64QAM	1	0	21.66	21.41	22.09	21.39	22.12	0-2	2
	1	36	21.69	21.70	22.27	21.62	22.33		2
	1	74	21.62	21.44	22.21	21.32	22.35		2
	36	0	20.68	20.54	20.65	20.88	20.65	0-3	3
	36	18	20.72	20.75	20.76	21.00	20.85		3
	36	37	20.69	20.62	20.79	20.91	20.83		3
	75	0	20.63	20.62	20.77	20.84	20.82		3

FCC ID: A3LSMG986JPN	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 47 of 106





**Table 9-28**  
**LTE Band 41 Measured  $P_{max}$  for DSI = 2 (Head) or DSI = 0 (Body-worn, or Phablet with grip sensor not triggered) - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.79	23.67	23.86	23.90	23.84	0	0
	1	25	23.89	23.96	24.19	24.05	24.19		0
	1	49	23.76	23.78	24.03	23.89	23.75		0
	25	0	22.99	22.89	23.12	23.19	23.13	0-1	1
	25	12	22.96	23.08	23.29	23.32	23.29		1
	25	25	23.00	22.96	23.17	23.24	23.16		1
	50	0	22.93	23.01	23.23	23.25	23.13		1
16QAM	1	0	22.68	22.53	22.77	23.22	22.73	0-1	1
	1	25	22.71	22.80	22.94	23.54	23.03		1
	1	49	22.76	22.64	22.85	23.27	22.87		1
	25	0	21.97	21.91	22.18	22.22	22.14	0-2	2
	25	12	21.97	22.06	22.29	22.33	22.23		2
	25	25	22.00	21.95	22.17	22.31	22.08		2
	50	0	21.93	21.98	22.22	22.28	22.06		2
64QAM	1	0	21.79	21.35	21.75	22.02	21.87	0-2	2
	1	25	21.85	21.66	22.12	22.00	22.12		2
	1	49	21.88	21.47	22.05	21.95	22.00		2
	25	0	20.76	20.72	20.91	20.88	20.93	0-3	3
	25	12	20.70	20.91	21.05	21.10	21.04		3
	25	25	20.70	20.80	20.96	20.95	20.84		3
	50	0	20.75	20.80	21.03	21.05	21.01		3

**Table 9-29**  
**LTE Band 41 Measured  $P_{max}$  for DSI = 2 (Head) or DSI = 0 (Body-worn, or Phablet with grip sensor not triggered) - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.54	23.30	23.59	23.65	23.58	0	0
	1	12	23.53	23.61	23.90	23.90	23.82		0
	1	24	23.56	23.34	23.67	23.52	23.62		0
	12	0	22.70	22.59	22.83	22.89	22.81	0-1	1
	12	6	22.75	22.77	22.99	23.02	22.96		1
	12	13	22.70	22.67	22.92	22.89	22.86		1
	25	0	22.64	22.68	22.94	22.94	22.88		1
16QAM	1	0	22.86	22.64	22.47	22.50	22.44	0-1	1
	1	12	22.82	22.93	22.73	22.70	22.71		1
	1	24	22.86	22.68	22.56	22.52	22.50		1
	12	0	21.76	21.65	21.84	21.82	21.79	0-2	2
	12	6	21.75	21.80	21.94	22.08	21.93		2
	12	13	21.75	21.77	21.87	21.87	21.84		2
	25	0	21.69	21.73	21.91	21.90	21.86		2
64QAM	1	0	21.65	21.55	21.31	21.54	21.21	0-2	2
	1	12	21.55	21.49	21.61	21.87	21.54		2
	1	24	21.49	21.32	21.45	21.37	21.32		2
	12	0	20.63	20.60	20.89	20.82	20.81	0-3	3
	12	6	20.65	20.75	21.05	20.96	20.96		3
	12	13	20.67	20.66	20.92	20.88	20.89		3
	25	0	20.66	20.74	20.89	20.90	20.91		3



FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 48 of 106

**Table 9-30**  
**LTE Band 41 Measured  $P_{limit}$  for DSI = 3 (Hotspot mode) - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	20.50	20.67	20.52	20.64	20.35	0	0
	1	50	20.44	20.65	20.83	20.80	20.67		0
	1	99	20.49	20.28	20.50	20.41	20.59		0
	50	0	20.60	20.88	20.75	20.88	20.64	0-1	0
	50	25	20.60	20.96	20.98	20.94	20.87		0
	50	50	20.53	20.77	20.85	20.78	20.86		0
	100	0	20.50	20.81	20.82	20.81	20.81		0
16QAM	1	0	20.62	20.76	20.53	20.76	20.45	0-1	0
	1	50	20.46	20.93	20.93	20.92	20.88		0
	1	99	20.43	20.43	20.60	20.42	20.76		0
	50	0	20.59	20.92	20.82	20.91	20.72	0-2	0
	50	25	20.62	20.97	20.97	21.00	20.93		0
	50	50	20.57	20.82	20.86	20.81	20.92		0
	100	0	20.53	20.92	20.91	20.92	20.89		0
64QAM	1	0	20.32	20.31	20.20	20.44	20.10	0-2	0
	1	50	20.28	20.58	20.57	20.66	20.52		0
	1	99	20.13	20.11	20.26	20.12	20.42		0
	50	0	20.69	20.95	20.85	20.95	20.78	0-3	0
	50	25	20.66	21.06	21.03	21.05	20.98		0
	50	50	20.58	20.86	20.97	20.85	20.98		0
	100	0	20.55	20.92	20.92	20.91	20.85		0

**Table 9-31**  
**LTE Band 41 Measured  $P_{limit}$  for DSI = 3 (Hotspot mode) - 15 MHz Bandwidth**

LTE Band 41 15 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	20.79	20.58	20.70	20.82	20.66	0	0	
	1	36	20.80	20.84	20.98	21.03	21.02		0-1	0
	1	74	20.71	20.53	20.81	20.73	20.92			0
	36	0	20.84	20.74	20.90	21.00	20.87	0		
	36	18	20.90	20.91	21.09	21.14	21.10	0		0
	36	37	20.86	20.81	21.06	21.06	21.08		0	
	75	0	20.81	20.79	21.00	21.04	20.98		0	
16QAM	1	0	20.72	20.46	20.66	20.77	20.57	0-1	0	
	1	36	20.75	20.68	20.98	20.96	20.92		0-2	0
	1	74	20.65	20.45	20.75	20.67	20.82			0
	36	0	20.88	20.78	20.97	21.02	20.91	0		0
	36	18	20.95	20.95	21.15	21.17	21.14			0
	36	37	20.90	20.85	21.15	21.09	21.11		0	
	75	0	20.81	20.82	21.02	21.05	21.02	0		
64QAM	1	0	20.86	20.23	20.80	20.59	20.43	0-2	0	
	1	36	20.92	20.57	21.14	20.81	20.88		0-3	0
	1	74	20.84	20.29	20.99	20.53	20.66			0
	36	0	20.88	20.79	20.92	21.08	20.99	0		
	36	18	20.95	20.95	21.16	21.24	21.15	0		
	36	37	20.89	20.87	21.11	21.12	21.17		0	
	75	0	20.86	20.79	21.03	21.05	21.00	0		

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 49 of 106

**Table 9-32**  
**LTE Band 41 Measured  $P_{limit}$  for DSI = 3 (Hotspot mode) - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	20.70	20.57	20.52	20.76	20.54	0	0	
	1	25	20.77	20.66	20.96	21.10	20.98		0-1	0
	1	49	20.75	20.64	20.69	20.60	20.85			0
	25	0	20.82	20.74	20.84	20.96	20.87	0		
	25	12	20.84	20.86	21.07	21.10	21.11	0		0
	25	25	20.81	20.85	21.02	20.97	21.10		0	
	50	0	20.78	20.77	20.96	20.97	21.03		0	
16QAM	1	0	20.42	20.59	20.23	20.66	20.49	0-1	0	
	1	25	20.47	20.63	20.70	20.91	20.73		0-2	0
	1	49	20.42	20.59	20.40	20.48	20.59			0
	25	0	20.85	20.78	20.90	21.07	20.91	0		0
	25	12	20.90	20.94	21.12	21.24	21.17			0
	25	25	20.85	20.89	21.05	21.07	21.12		0	
	50	0	20.77	20.81	21.00	21.06	21.05	0		
64QAM	1	0	20.82	20.94	20.55	20.66	20.58	0-2	0	
	1	25	20.83	20.79	21.02	20.56	21.08		0-3	0
	1	49	20.75	20.88	20.70	20.72	20.90			0
	25	0	20.88	20.73	20.89	20.98	20.94	0		
	25	12	20.91	20.85	21.10	21.12	21.17	0		0
	25	25	20.87	20.81	21.08	20.97	21.14		0	
	50	0	20.84	20.76	20.99	21.05	21.07		0	

**Table 9-33**  
**LTE Band 41 Measured  $P_{limit}$  for DSI = 3 (Hotspot mode) - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	20.69	20.68	20.46	20.79	20.54	0	0
	1	12	20.74	20.74	20.94	21.01	20.99		0
	1	24	20.68	20.69	20.65	20.51	20.83		0
	12	0	20.79	20.73	20.81	20.98	20.85	0-1	0
	12	6	20.81	20.87	21.07	21.10	21.08		0
	12	13	20.77	20.83	20.98	20.93	21.06		0
	25	0	20.72	20.73	20.92	20.99	20.99		0
16QAM	1	0	20.82	20.99	20.22	21.04	20.78	0-1	0
	1	12	20.89	21.07	20.70	21.30	21.27		0
	1	24	20.84	21.07	20.39	20.87	21.13		0
	12	0	20.80	20.84	20.82	21.08	20.96	0-2	0
	12	6	20.82	20.97	21.08	21.19	21.17		0
	12	13	20.78	20.92	21.00	21.05	21.15		0
	25	0	20.74	20.78	20.99	21.04	21.01		0
64QAM	1	0	20.81	20.76	20.53	20.79	20.53	0-2	0
	1	12	20.82	20.85	21.07	21.15	21.08		0
	1	24	20.72	20.84	20.75	20.65	20.95		0
	12	0	20.89	20.71	20.84	20.99	20.86	0-3	0
	12	6	20.93	20.85	21.07	21.13	21.12		0
	12	13	20.87	20.81	20.99	20.99	21.10		0
	25	0	20.75	20.78	20.97	21.08	21.08		0



FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 50 of 106

Table 9-34

LTE Band 41 Measured  $P_{limit}$  for DSI = 1 (Phablet with grip sensor active) and/or DSI = 4 (Earjack active) - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.03	23.12	23.00	23.30	22.90	0	0
	1	50	22.95	23.07	23.30	23.39	23.27		0
	1	99	22.97	23.01	22.99	22.91	23.11		0
	50	0	22.57	22.61	22.78	22.89	22.70	0-1	0.5
	50	25	22.56	22.60	22.93	23.01	22.92		0.5
	50	50	22.52	22.57	22.86	22.81	22.89		0.5
	100	0	22.50	22.60	22.85	22.89	22.88		0.5
16QAM	1	0	22.68	22.77	22.67	22.78	22.46	0-1	0.5
	1	50	22.55	22.71	22.97	22.97	22.86		0.5
	1	99	22.48	22.76	22.65	22.42	22.79		0.5
	50	0	21.60	21.71	21.81	22.02	21.70	0-2	1.5
	50	25	21.63	21.84	22.00	22.02	21.96		1.5
	50	50	21.58	21.79	21.94	21.86	21.93		1.5
	100	0	21.52	21.65	21.92	21.97	21.91		1.5
64QAM	1	0	21.32	21.21	21.23	21.38	21.10	0-2	1.5
	1	50	21.22	21.60	21.60	21.60	21.54		1.5
	1	99	21.19	21.28	21.19	21.11	21.41		1.5
	50	0	20.63	20.84	20.85	20.91	20.74	0-3	2.5
	50	25	20.65	21.00	21.05	21.06	20.95		2.5
	50	50	20.60	20.98	20.97	20.86	20.92		2.5
	100	0	20.56	20.91	20.91	20.87	20.85		2.5

Table 9-35

LTE Band 41 Measured  $P_{limit}$  for DSI = 1 (Phablet with grip sensor active) and/or DSI = 4 (Earjack active) - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.02	23.54	23.32	23.08	22.92	0	0
	1	36	23.11	23.62	23.31	23.37	23.31		0
	1	74	23.05	23.56	23.04	22.93	23.18		0
	36	0	22.65	22.59	22.68	22.82	22.68	0-1	0.5
	36	18	22.71	22.70	22.89	22.97	22.92		0.5
	36	37	22.65	22.66	22.85	22.82	22.90		0.5
	75	0	22.58	22.58	22.76	22.86	22.82		0.5
16QAM	1	0	22.73	22.21	22.53	22.87	22.64	0-1	0.5
	1	36	22.78	22.30	22.99	23.16	23.09		0.5
	1	74	22.71	22.30	22.70	22.67	22.95		0.5
	36	0	21.66	21.55	21.68	21.89	21.76	0-2	1.5
	36	18	21.72	21.68	21.92	22.08	22.00		1.5
	36	37	21.65	21.63	21.88	21.88	21.97		1.5
	75	0	21.61	21.57	21.85	21.87	21.85		1.5
64QAM	1	0	21.65	21.59	21.38	21.63	21.38	0-2	1.5
	1	36	21.65	21.69	21.93	21.98	21.93		1.5
	1	74	21.58	21.71	21.66	21.51	21.80		1.5
	36	0	20.71	20.57	20.79	20.81	20.67	0-3	2.5
	36	18	20.78	20.67	21.00	20.98	20.92		2.5
	36	37	20.71	20.65	20.94	20.82	20.91		2.5
	75	0	20.60	20.61	20.84	20.92	20.90		2.5

FCC ID: A3LSMG986JPN



SAR EVALUATION REPORT



Approved by:  
Quality Manager

Document S/N:

1M2001240012-01-R1.A3L

Test Dates:

02/10/20 - 03/17/20

DUT Type:

Portable Handset

Page 51 of 106

Table 9-36

LTE Band 41 Measured  $P_{limit}$  for DSI = 1 (Phablet with grip sensor active) and/or DSI = 4 (Earjack active) - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	22.96	23.42	23.30	23.02	22.83	0	0
	1	25	23.04	23.54	23.29	23.30	23.29		0
	1	49	22.97	23.52	23.27	22.85	23.17		0
	25	0	22.59	22.51	22.63	22.76	22.64	0-1	0.5
	25	12	22.65	22.63	22.84	22.91	22.87		0.5
	25	25	22.58	22.59	22.81	22.77	22.87		0.5
	50	0	22.53	22.52	22.75	22.82	22.80		0.5
16QAM	1	0	22.64	22.21	22.57	22.21	22.58	0-1	0.5
	1	25	22.69	22.25	23.02	22.57	23.05		0.5
	1	49	22.64	22.26	22.78	22.09	22.92		0.5
	25	0	21.62	21.49	21.69	21.78	21.68	0-2	1.5
	25	12	21.65	21.65	21.92	21.95	21.96		1.5
	25	25	21.65	21.59	21.85	21.77	21.91		1.5
	50	0	21.60	21.51	21.75	21.83	21.78		1.5
64QAM	1	0	21.63	21.50	21.32	21.56	21.31	0-2	1.5
	1	25	21.59	21.62	21.87	21.94	21.86		1.5
	1	49	21.53	21.61	21.57	21.48	21.73		1.5
	25	0	20.68	20.52	20.63	20.81	20.61	0-3	2.5
	25	12	20.74	20.63	20.89	20.95	20.88		2.5
	25	25	20.70	20.62	20.81	20.77	20.82		2.5
	50	0	20.57	20.53	20.83	20.83	20.81		2.5

Table 9-37

LTE Band 41 Measured  $P_{limit}$  for DSI = 1 (Phablet with grip sensor active) and/or DSI = 4 (Earjack active) - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.32	23.30	23.11	23.33	23.18	0	0
	1	12	23.38	23.36	23.57	23.63	23.59		0
	1	24	23.33	23.36	23.25	23.18	23.44		0
	12	0	22.41	22.36	22.43	22.57	22.44	0-1	0.5
	12	6	22.46	22.45	22.70	22.73	22.70		0.5
	12	13	22.38	22.41	22.61	22.56	22.67		0.5
	25	0	22.37	22.32	22.55	22.60	22.63		0.5
16QAM	1	0	22.58	22.45	22.40	22.49	22.48	0-1	0.5
	1	12	22.64	22.56	22.87	22.83	22.33		0.5
	1	24	22.56	22.55	22.55	22.36	22.18		0.5
	12	0	21.52	21.36	21.53	21.61	21.43	0-2	1.5
	12	6	21.52	21.49	21.74	21.73	21.71		1.5
	12	13	21.90	21.86	22.07	21.99	22.04		1.5
	25	0	21.79	21.78	21.97	22.09	21.99		1.5
64QAM	1	0	21.90	21.75	21.55	21.78	21.56	0-2	1.5
	1	12	21.87	21.86	22.07	22.15	22.11		1.5
	1	24	21.80	21.85	21.75	21.66	21.97		1.5
	12	0	20.83	20.83	20.85	21.08	20.86	0-3	2.5
	12	6	20.85	20.95	21.07	21.26	21.11		2.5
	12	13	20.83	20.92	21.02	21.08	21.07		2.5
	25	0	20.81	20.78	21.03	21.05	21.06		2.5

FCC ID: A3LSMG986JPN



SAR EVALUATION REPORT



Approved by:  
Quality Manager

Document S/N:  
1M2001240012-01-R1.A3L

Test Dates:  
02/10/20 - 03/17/20

DUT Type:  
Portable Handset

Page 52 of 106

### 9.3.6 LTE Uplink Carrier Aggregation Conducted Powers

Table 9-38

LTE Uplink Carrier Aggregation Measured  $P_{max}$  for DSI = 2 (Head) or DSI = 0 (Body-worn, or Phablet with grip sensor not triggered)

Combination	PCC								SCC						Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	40620	2593.0	QPSK	1	0	LTE B41	20	40422	2573.2	QPSK	1	99	24.35	23.57

Table 9-39

LTE Uplink Carrier Aggregation  $P_{limit}$  for DSI = 3 (Hotspot mode)

Combination	PCC								SCC						Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	39750	2506.0	QPSK	1	99	LTE B41	20	39948	2525.8	QPSK	1	0	21.07	20.49

Table 9-40

LTE Uplink Carrier Aggregation  $P_{limit}$  for DSI = 1 (Phablet with grip sensor active) and/or DSI = 4 (Earjack active)




Combination	PCC								SCC						Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	40620	2593.0	QPSK	1	0	LTE B41	20	40422	2573.2	QPSK	1	99	24.00	23.00

#### Notes:

1. This device supports uplink carrier aggregation for LTE CA\_41C with a maximum of two 20 MHz component carriers. For intraband contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when non-contiguous RB allocation is implemented. The conducted powers and MPR settings in this device are permanently implemented per the above 3GPP requirements.
2. Per FCC Guidance, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.



Figure 9-3  
Power Measurement Setup

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 53 of 106

## 9.4 WLAN Conducted Powers

**Table 9-41**  
**2.4 GHz WLAN Maximum Average RF Power – Ant 1**




2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ax SU
		Average	Average	Average	Average
2412	1	18.22	17.92	17.35	16.47
2437	6	18.42	17.54	17.36	16.31
2462	11	18.65	16.68	16.39	14.06

**Table 9-42**  
**2.4 GHz WLAN Maximum Average RF Power – Ant 2**

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ax SU
		Average	Average	Average	Average
2412	1	18.04	17.25	17.15	16.73
2437	6	18.56	17.96	17.96	16.70
2462	11	18.41	16.45	16.35	14.01

**Table 9-43**  
**5 GHz WLAN Maximum Average RF Power – Ant 1**



5GHz (20MHz) Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11a	802.11n	802.11ac	802.11ax SU
		Average	Average	Average	Average
5180	36	16.01	15.93	16.06	15.93
5200	40	17.64	17.76	17.61	15.99
5220	44	17.72	17.71	17.56	15.92
5240	48	17.67	17.66	17.51	15.97
5260	52	17.32	17.18	17.25	15.73
5280	56	17.96	17.96	17.94	15.59
5300	60	17.84	17.77	17.77	15.34
5320	64	16.14	16.12	16.16	15.97
5500	100	16.48	16.34	16.41	15.99
5520	104	17.97	17.95	17.98	15.76
5600	120	17.68	17.76	17.64	15.97
5620	124	17.61	17.71	17.63	15.88
5720	144	17.77	17.75	17.71	15.98
5745	149	17.98	17.35	17.29	15.48
5785	157	17.73	17.74	17.72	15.98
5825	165	17.74	17.84	17.77	15.97

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 54 of 106	



**Table 9-44**  
**5 GHz WLAN Maximum Average RF Power – Ant 2**

5GHz (20MHz) Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11a	802.11n	802.11ac	802.11ax SU
		Average	Average	Average	Average
5180	36	16.20	16.16	16.13	15.55
5200	40	17.25	17.21	17.36	15.54
5220	44	17.26	17.10	17.33	15.48
5240	48	17.25	17.16	17.39	15.49
5260	52	17.26	17.25	17.44	15.59
5280	56	17.35	17.37	17.36	15.68
5300	60	17.34	17.49	17.58	15.70
5320	64	16.31	16.24	16.24	15.69
5500	100	16.08	16.02	16.06	15.32
5520	104	17.77	17.81	17.78	15.97
5600	120	17.53	17.16	17.23	15.55
5620	124	17.26	17.01	17.35	15.44
5720	144	17.29	17.91	17.15	15.40
5745	149	17.13	17.36	17.34	15.55
5785	157	17.25	17.19	17.54	15.69
5825	165	16.98	17.96	17.21	15.42

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 55 of 106	

**Table 9-45**  
**5 GHz WLAN Maximum Average RF Power – MIMO**



5GHz (20MHz) 802.11n Conducted Power [dBm]				
Freq [MHz]	Channel	ANT1	ANT2	MIMO
5180	36	15.93	16.16	19.06
5200	40	17.76	17.21	20.50
5220	44	17.71	17.10	20.43
5240	48	17.66	17.16	20.43
5260	52	17.18	17.25	20.23
5280	56	17.96	17.37	20.69
5300	60	17.77	17.49	20.64
5320	64	16.12	16.24	19.19
5500	100	16.34	16.02	19.19
5520	104	17.95	17.81	20.89
5600	120	17.76	17.16	20.48
5620	124	17.71	17.01	20.38
5720	144	17.75	17.91	20.84
5745	149	17.35	17.36	20.37
5785	157	17.74	17.19	20.48
5825	165	17.84	17.96	20.91

**Table 9-46**  
**2.4 GHz WLAN Reduced Average RF Power – Ant 1**

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ax
		Average	Average	Average	Average
2412	1	16.61	16.55	16.31	16.47
2437	6	16.72	16.56	16.48	16.31
2462	11	16.95	16.68	16.39	14.06

**Table 9-47**  
**2.4 GHz WLAN Reduced Average RF Power – Ant 2**

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ax
		Average	Average	Average	Average
2412	1	16.36	15.80	15.68	16.73
2437	6	16.23	16.68	16.65	16.70
2462	11	16.15	16.45	16.35	14.01

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 56 of 106

**Table 9-48**  
**5 GHz WLAN Reduced Average RF Power – Ant 1**

5GHz (40MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11n	802.11ac	802.11ax
		Average	Average	Average
5190	38	13.02	13.05	13.33
5230	46	13.66	13.72	13.75
5270	54	13.92	13.89	13.53
5310	62	12.51	13.48	13.97



5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission
		802.11ac
		Average
5530	106	12.36
5610	122	13.32
5690	138	13.63
5775	155	13.24

**Table 9-49**  
**5 GHz WLAN Reduced Average RF Power – Ant 2**

5GHz (40MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11n	802.11ac	802.11ax
		Average	Average	Average
5190	38	13.09	13.13	13.42
5230	46	13.38	13.13	13.79
5270	54	13.78	13.93	13.58
5310	62	13.03	13.09	13.41

5GHz (80MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	IEEE Transmission
		802.11ac
		Average
5530	106	12.28
5610	122	13.31
5690	138	13.37
5775	155	13.58


FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 57 of 106

**Table 9-50**  
**Reduced Output Powers During Conditions with 2.4 GHz and 5 GHz WLAN**



5GHz (40MHz) 802.11n Conducted Power [dBm]			
Freq [MHz]	Channel	ANT1	ANT2
5190	38	13.02	13.09
5230	46	13.66	13.38
5270	54	13.92	13.78
5310	62	12.51	13.03
5GHz (80MHz) 802.11ac Conducted Power [dBm]			
Freq [MHz]	Channel	ANT1	ANT2
5530	106	12.36	12.28
5610	122	13.32	13.31
5690	138	13.63	13.37
5775	155	13.24	13.58

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

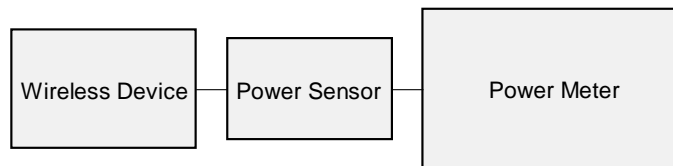- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.






**Figure 9-4**  
**Power Measurement Setup**

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 58 of 106	

## 9.5 Bluetooth Conducted Powers

Table 9-51  
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	12.53	17.902
2441	1.0	39	14.91	30.974
2480	1.0	78	13.49	22.325
2402	2.0	0	10.70	11.761
2441	2.0	39	12.16	16.436
2480	2.0	78	10.81	12.044
2402	3.0	0	10.42	11.011
2441	3.0	39	12.33	17.093
2480	3.0	78	10.84	12.134

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 59 of 106

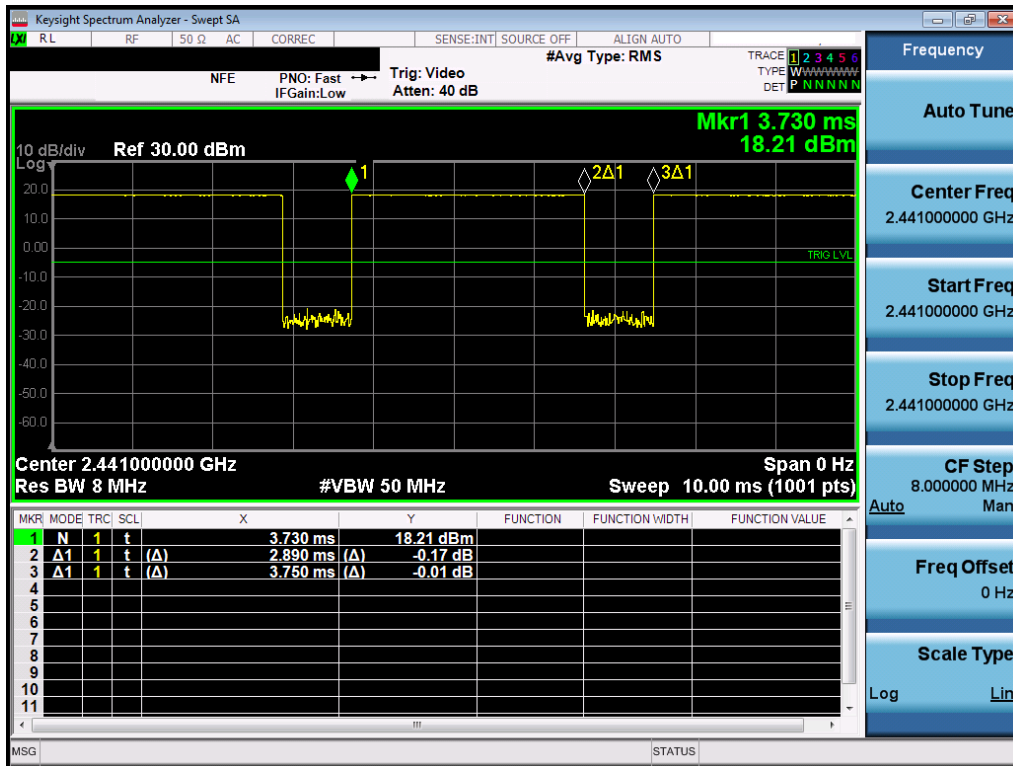


Figure 9-5  
Bluetooth Transmission Plot

Equation 9-1  
Bluetooth Duty Cycle Calculation

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.89\ ms}{3.75\ ms} * 100\% = 77.1\%$$

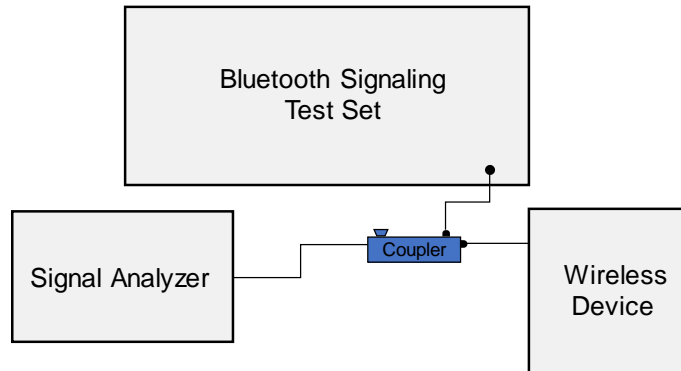




Figure 9-6  
Power Measurement Setup




FCC ID: A3LSMG986JPN	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 60 of 106

# 10 SYSTEM VERIFICATION

## 10.1 Tissue Verification

Table 10-1  
Head Measured Tissue Properties




Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
02/12/2020	750 Head	20.1	700	0.860	40.764	0.889	42.201	-3.26%	-3.41%
			710	0.863	40.731	0.890	42.149	-3.03%	-3.36%
			750	0.877	40.595	0.894	41.942	-1.90%	-3.21%
02/24/2020	750 Head	20.5	750	0.898	40.659	0.894	41.942	0.45%	-3.06%
			770	0.905	40.599	0.895	41.838	1.12%	-2.96%
			785	0.910	40.566	0.896	41.760	1.56%	-2.86%
02/12/2020	835 Head	20.1	820	0.902	40.395	0.899	41.578	0.33%	-2.85%
			835	0.908	40.342	0.900	41.500	0.89%	-2.79%
			850	0.913	40.292	0.916	41.500	-0.33%	-2.91%
02/17/2020	1750 Head	20.1	1710	1.336	39.964	1.348	40.142	-0.89%	-0.44%
			1720	1.342	39.947	1.354	40.126	-0.89%	-0.45%
			1745	1.358	39.898	1.368	40.087	-0.73%	-0.47%
			1750	1.361	39.889	1.371	40.079	-0.73%	-0.47%
			1770	1.374	39.854	1.383	40.047	-0.65%	-0.48%
02/11/2020	1900 Head	19.8	1790	1.386	39.827	1.394	40.016	-0.57%	-0.47%
			1850	1.408	38.144	1.400	40.000	0.57%	-4.64%
			1860	1.415	38.127	1.400	40.000	1.07%	-4.68%
			1880	1.429	38.096	1.400	40.000	2.07%	-4.76%
			1900	1.442	38.065	1.400	40.000	3.00%	-4.84%
			1905	1.445	38.057	1.400	40.000	3.21%	-4.86%
02/19/2020	2450 Head	20.9	1910	1.448	38.048	1.400	40.000	3.43%	-4.88%
			2400	1.804	38.052	1.756	39.289	2.73%	-3.15%
			2450	1.843	37.968	1.800	39.200	2.39%	-3.14%
02/24/2020	2450 Head	20.0	2500	1.884	37.875	1.855	39.136	1.56%	-3.22%
			2400	1.817	38.826	1.756	39.289	3.47%	-1.18%
			2450	1.857	38.723	1.800	39.200	3.17%	-1.22%
03/17/2020	2450 Head	23.0	2500	1.900	38.618	1.855	39.136	2.43%	-1.32%
			2550	1.895	37.389	1.909	39.073	-0.73%	-4.31%
			2560	1.903	37.379	1.920	39.060	-0.89%	-4.30%
02/14/2020	5200-5800 Head	21.6	2600	1.931	37.326	1.964	39.009	-1.68%	-4.31%
			5250	4.713	36.795	4.706	35.929	0.15%	2.41%
			5270	4.736	36.762	4.727	35.906	0.19%	2.38%
			5690	5.228	35.997	5.158	35.426	1.36%	1.61%
			5750	5.310	35.910	5.219	35.357	1.74%	1.56%
			5775	5.334	35.870	5.245	35.329	1.70%	1.53%

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 61 of 106



**Table 10-2**  
**Body Measured Tissue Properties**




Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
02/11/2020	750 Body	20.7	700	0.940	54.275	0.959	55.726	-1.98%	-2.60%
			710	0.943	54.264	0.960	55.687	-1.77%	-2.56%
			750	0.939	54.188	0.964	55.531	-0.52%	-2.42%
02/17/2020	750 Body	19.8	750	0.939	54.303	0.964	55.531	-2.59%	-2.21%
			770	0.947	54.236	0.965	55.453	-1.87%	-2.19%
			785	0.952	54.199	0.966	55.395	-1.45%	-2.16%
03/09/2020	750 Body	21.5	700	0.925	54.032	0.959	55.726	-3.55%	-3.04%
			710	0.929	53.976	0.960	55.687	-3.23%	-3.07%
			750	0.937	53.527	0.964	55.531	-2.80%	-3.61%
02/10/2020	835 Body	19.5	820	0.963	54.626	0.969	55.258	-0.62%	-1.14%
			835	0.969	54.593	0.970	55.200	-0.10%	-1.10%
			850	0.976	54.567	0.988	55.154	-1.21%	-1.06%
02/12/2020	835 Body	22.6	820	0.933	54.624	0.969	55.258	-3.72%	-1.15%
			835	0.949	54.487	0.970	55.200	-2.16%	-1.29%
			850	0.964	54.344	0.988	55.154	-2.43%	-1.47%
02/13/2020	835 Body	22.2	820	0.925	54.970	0.969	55.258	-4.54%	-0.52%
			835	0.941	54.852	0.970	55.200	-2.99%	-0.63%
			850	0.956	54.731	0.988	55.154	-3.24%	-0.77%
02/10/2020	1750 Body	20.5	1710	1.445	55.236	1.463	53.537	-1.23%	3.17%
			1720	1.457	55.198	1.469	53.511	-0.82%	3.15%
			1745	1.486	55.118	1.485	53.445	0.07%	3.13%
			1750	1.492	55.102	1.488	53.432	0.27%	3.13%
			1770	1.514	55.031	1.501	53.379	0.87%	3.09%
03/04/2020	1750 Body	20.7	1790	1.536	54.961	1.514	53.326	1.45%	3.07%
			1710	1.459	51.166	1.463	53.537	-0.27%	-4.43%
			1720	1.470	51.128	1.469	53.511	0.07%	-4.45%
			1745	1.500	51.022	1.485	53.445	1.01%	-4.53%
			1750	1.506	51.003	1.488	53.432	1.21%	-4.55%
02/19/2020	1900 Body	22.1	1770	1.529	50.930	1.501	53.379	1.87%	-4.59%
			1790	1.552	50.857	1.514	53.326	2.51%	-4.63%
			1850	1.501	52.406	1.520	53.300	-1.25%	-1.68%
			1860	1.512	52.370	1.520	53.300	-0.53%	-1.74%
			1880	1.534	52.297	1.520	53.300	0.92%	-1.88%
03/06/2020	1900 Body	23.3	1900	1.554	52.227	1.520	53.300	2.24%	-2.01%
			1905	1.560	52.211	1.520	53.300	2.63%	-2.04%
			1910	1.565	52.192	1.520	53.300	2.96%	-2.08%
			1850	1.497	53.357	1.520	53.300	-1.51%	0.11%
			1860	1.509	53.324	1.520	53.300	-0.72%	0.05%
03/09/2020	1900 Body	24.0	1880	1.532	53.260	1.520	53.300	0.79%	-0.08%
			1900	1.554	53.192	1.520	53.300	2.24%	-0.20%
			1905	1.560	53.172	1.520	53.300	2.63%	-0.24%
			1910	1.565	53.156	1.520	53.300	2.96%	-0.27%
			1850	1.503	53.234	1.520	53.300	-1.12%	-0.12%
02/24/2020	2450 Body	24.0	1860	1.515	53.205	1.520	53.300	-0.33%	-0.18%
			1880	1.538	53.140	1.520	53.300	1.18%	-0.30%
			1900	1.560	53.061	1.520	53.300	2.63%	-0.45%
			1905	1.566	53.041	1.520	53.300	3.03%	-0.49%
			1910	1.571	53.019	1.520	53.300	3.36%	-0.53%
02/28/2020	2450 Body	23.2	2400	1.921	53.203	1.902	52.767	1.00%	0.83%
			2450	1.988	53.017	1.950	52.700	1.95%	0.60%
			2500	2.058	52.838	2.021	52.636	1.83%	0.38%
			2400	1.972	51.871	1.902	52.767	3.68%	-1.70%
			2450	2.032	51.738	1.950	52.700	4.21%	-1.83%
03/09/2020	2450 Body	22.8	2500	2.090	51.596	2.021	52.636	3.41%	-1.98%
			2400	1.944	52.252	1.902	52.767	2.21%	-0.98%
			2450	2.014	52.082	1.950	52.700	3.28%	-1.17%
			2500	2.082	51.901	2.021	52.636	3.02%	-1.40%
			2510	2.097	51.865	2.035	52.623	3.05%	-1.44%
			2535	2.133	51.774	2.071	52.592	2.99%	-1.56%
			2550	2.155	51.721	2.092	52.573	3.01%	-1.62%
			2560	2.169	51.687	2.106	52.560	2.99%	-1.66%
			2600	2.224	51.535	2.163	52.509	2.82%	-1.85%
			2650	2.295	51.324	2.234	52.445	2.73%	-2.14%
			2680	2.339	51.209	2.277	52.407	2.72%	-2.29%
			2700	2.367	51.133	2.305	52.382	2.69%	-2.38%
03/12/2020	2450 Body	23.3	2450	1.993	52.545	1.950	52.700	2.21%	-0.29%
			2500	2.061	52.345	2.021	52.636	1.96%	-0.55%
			2510	2.074	52.310	2.035	52.623	1.92%	-0.59%
03/16/2020	2450 Body	22.5	2450	2.036	52.194	1.950	52.700	4.41%	-0.96%
			2500	2.096	52.032	2.021	52.636	3.71%	-1.15%
			2510	2.108	52.003	2.035	52.623	3.59%	-1.18%
			2535	2.138	51.942	2.071	52.592	3.24%	-1.24%
			2550	2.157	51.907	2.092	52.573	3.11%	-1.27%
			2560	2.169	51.881	2.106	52.560	2.99%	-1.29%
			2600	2.219	51.753	2.163	52.509	2.59%	-1.44%
			2650	2.279	51.607	2.234	52.445	2.01%	-1.60%
			2680	2.318	51.513	2.277	52.407	1.80%	-1.71%
			2700	2.343	51.443	2.305	52.382	1.65%	-1.79%

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 62 of 106	

**Table 10-3**  
**Body Measured Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
02/24/2020	5200-5800 Body	21.5	5180	5.416	47.364	5.276	49.041	2.65%	-3.42%
			5190	5.425	47.348	5.288	49.028	2.59%	-3.43%
			5200	5.438	47.319	5.299	49.014	2.62%	-3.46%
			5210	5.452	47.303	5.311	49.001	2.65%	-3.47%
			5220	5.460	47.288	5.323	48.987	2.57%	-3.47%
			5240	5.483	47.244	5.346	48.960	2.56%	-3.50%
			5250	5.501	47.219	5.358	48.947	2.67%	-3.53%
			5260	5.517	47.213	5.369	48.933	2.76%	-3.52%
			5270	5.530	47.205	5.381	48.919	2.77%	-3.50%
			5280	5.545	47.186	5.393	48.906	2.82%	-3.52%
			5290	5.559	47.166	5.404	48.892	2.87%	-3.53%
			5300	5.571	47.153	5.416	48.879	2.86%	-3.53%
			5310	5.583	47.136	5.428	48.865	2.86%	-3.54%
			5320	5.595	47.114	5.439	48.851	2.87%	-3.56%
			5500	5.834	46.811	5.650	48.607	3.26%	-3.69%
			5510	5.848	46.797	5.661	48.594	3.30%	-3.70%
			5520	5.860	46.790	5.673	48.580	3.30%	-3.68%
			5530	5.874	46.787	5.685	48.566	3.32%	-3.66%
			5540	5.886	46.762	5.696	48.553	3.34%	-3.69%
			5550	5.897	46.741	5.708	48.539	3.31%	-3.70%
			5560	5.909	46.714	5.720	48.526	3.30%	-3.73%
			5580	5.945	46.677	5.743	48.499	3.52%	-3.76%
			5600	5.976	46.635	5.766	48.471	3.64%	-3.79%
			5610	5.990	46.627	5.778	48.458	3.67%	-3.78%
			5620	6.005	46.611	5.790	48.444	3.71%	-3.78%
			5640	6.032	46.588	5.813	48.417	3.77%	-3.78%
			5660	6.056	46.560	5.837	48.390	3.75%	-3.78%
			5670	6.070	46.527	5.848	48.376	3.80%	-3.82%
			5680	6.081	46.496	5.860	48.363	3.77%	-3.86%
			5690	6.092	46.483	5.872	48.349	3.75%	-3.86%
			5700	6.106	46.467	5.883	48.336	3.79%	-3.87%
			5710	6.125	46.451	5.895	48.322	3.90%	-3.87%
			5720	6.144	46.428	5.907	48.309	4.01%	-3.89%
			5745	6.179	46.404	5.936	48.275	4.09%	-3.88%
			5750	6.183	46.403	5.942	48.268	4.06%	-3.86%
			5755	6.189	46.403	5.947	48.261	4.07%	-3.85%
			5765	6.203	46.399	5.959	48.248	4.09%	-3.83%
			5775	6.215	46.385	5.971	48.234	4.09%	-3.83%
			5785	6.230	46.364	5.982	48.220	4.15%	-3.85%
			5795	6.241	46.332	5.994	48.207	4.12%	-3.89%
			5800	6.249	46.321	6.000	48.200	4.15%	-3.90%
			5805	6.256	46.309	6.006	48.193	4.16%	-3.91%
			5825	6.287	46.269	6.029	48.166	4.28%	-3.94%
03/17/2020	5200-5800 Body	23.0	5750	6.210	46.477	5.942	48.268	4.51%	-3.71%
			5805	6.276	46.383	6.006	48.193	4.50%	-3.76%
			5825	6.295	46.355	6.029	48.166	4.41%	-3.76%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.




FCC ID: A3LSMG986JPN	 <small>Proud to be part of</small> 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	Page 63 of 106	

## 10.2 Test System Verification

Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.


**Table 10-4**  
**System Verification Results – 1g**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR <sub>1g</sub> (W/kg)	1 W Target SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation <sub>1g</sub> (%)
L	750	HEAD	02/12/2020	22.6	20.1	0.200	1003	7410	1.660	8.280	8.300	0.24%
L	750	HEAD	02/24/2020	21.6	20.0	0.200	1054	7410	1.720	8.290	8.600	3.74%
L	835	HEAD	02/12/2020	22.6	20.1	0.200	4d133	7410	2.000	9.430	10.000	6.04%
L	1750	HEAD	02/17/2020	22.7	20.1	0.100	1008	7410	3.810	36.200	38.100	5.25%
L	1900	HEAD	02/11/2020	19.6	19.8	0.100	5d080	7410	4.300	39.800	43.000	8.04%
M	2450	HEAD	02/19/2020	22.4	21.3	0.100	797	7570	5.400	52.700	54.000	2.47%
M	2450	HEAD	02/24/2020	21.0	20.0	0.100	797	7570	5.310	52.700	53.100	0.76%
E	2600	HEAD	03/17/2020	22.8	22.1	0.100	1064	3589	6.070	58.100	60.700	4.48%
H	5250	HEAD	02/14/2020	21.4	21.3	0.050	1057	7406	3.640	79.200	72.800	-8.08%
H	5750	HEAD	02/14/2020	21.4	21.3	0.050	1057	7406	3.710	80.500	74.200	-7.83%
P	750	BODY	02/11/2020	22.0	20.7	0.200	1054	7551	1.770	8.550	8.850	3.51%
P	750	BODY	02/17/2020	23.9	19.4	0.200	1003	7551	1.700	8.580	8.500	-0.93%
K	750	BODY	03/09/2020	23.0	21.5	0.200	1161	7547	1.690	8.430	8.450	0.24%
P	835	BODY	02/10/2020	20.1	19.5	0.200	4d132	7551	2.050	9.960	10.250	2.91%
G	835	BODY	02/12/2020	22.7	22.6	0.200	4d047	7409	2.040	9.470	10.200	7.71%
H	835	BODY	02/13/2020	22.3	22.2	0.200	4d047	7406	2.030	9.470	10.150	7.18%
I	1750	BODY	02/10/2020	21.5	20.5	0.100	1148	7357	3.810	37.700	38.100	1.06%
L	1750	BODY	03/04/2020	22.7	21.7	0.100	1150	7410	3.860	36.600	38.600	5.46%
P	1900	BODY	02/19/2020	23.5	22.1	0.100	5d148	7551	4.060	39.100	40.600	3.84%
J	1900	BODY	03/09/2020	22.7	23.4	0.100	5d080	7571	4.140	39.200	41.400	5.61%
P	2450	BODY	02/24/2020	21.9	22.3	0.100	719	7551	5.130	50.800	51.300	0.98%
K	2450	BODY	02/28/2020	23.0	23.2	0.100	797	7547	5.070	51.100	50.700	-0.78%
I	2450	BODY	03/09/2020	20.9	21.1	0.100	797	7357	5.110	51.100	51.100	0.00%
I	2450	BODY	03/12/2020	23.0	22.3	0.100	797	7357	5.230	51.100	52.300	2.35%
I	2600	BODY	03/09/2020	20.9	21.1	0.100	1004	7357	5.700	54.800	57.000	4.01%
G	5250	BODY	02/24/2020	23.7	22.2	0.050	1057	7409	3.790	75.900	75.800	-0.13%
G	5600	BODY	02/24/2020	23.7	22.2	0.050	1057	7409	4.010	79.900	80.200	0.38%
G	5750	BODY	02/24/2020	23.7	22.2	0.050	1057	7409	3.760	76.700	75.200	-1.96%
G	5750	BODY	03/17/2020	22.8	22.3	0.050	1237	7409	3.740	75.900	74.800	-1.45%

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset		Page 64 of 106

**Table 10-5**  
**System Verification Results – 10g**

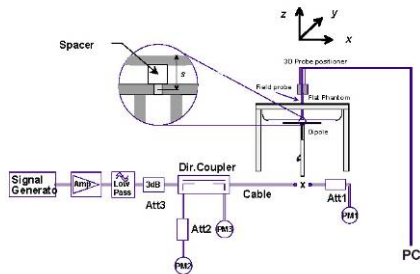


System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR <sub>10g</sub> (W/kg)	1 W Target SAR <sub>10g</sub> (W/kg)	1 W Normalized SAR <sub>10g</sub> (W/kg)	Deviation <sub>10g</sub> (%)
L	1750	BODY	03/04/2020	22.7	21.7	0.100	1150	7410	2.040	19.400	20.400	5.15%
J	1900	BODY	03/06/2020	21.7	21.4	0.100	5d149	7571	2.200	20.700	22.000	6.28%
K	2450	BODY	03/16/2020	23.2	22.5	0.100	797	7547	2.330	24.200	23.300	-3.72%
K	2600	BODY	03/16/2020	23.2	22.5	0.100	1004	7547	2.350	24.700	23.500	-4.86%
G	5250	BODY	02/24/2020	23.7	22.2	0.050	1057	7409	1.060	21.100	21.200	0.47%
G	5600	BODY	02/24/2020	23.7	22.2	0.050	1057	7409	1.110	22.300	22.200	-0.45%
G	5750	BODY	02/24/2020	23.7	22.2	0.050	1057	7409	1.030	21.200	20.600	-2.83%



**Figure 10-1**  
**System Verification Setup Diagram**



**Figure 10-2**  
**System Verification Setup Photo**

FCC ID: A3LSMG986JPN	 <small>Proud to be part of</small> 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 65 of 106

# 11 SAR DATA SUMMARY

## 11.1 Standalone Head SAR Data

Table 11-1  
GSM 850 Head SAR



MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.0	32.56	0.04	Right	Cheek	0441M	1:8.3	0.129	1.107	0.143	A1
836.60	190	GSM 850	GSM	33.0	32.56	0.07	Right	Tilt	0441M	1:8.3	0.063	1.107	0.070	
836.60	190	GSM 850	GSM	33.0	32.56	0.15	Left	Cheek	0441M	1:8.3	0.096	1.107	0.106	
836.60	190	GSM 850	GSM	33.0	32.56	0.04	Left	Tilt	0441M	1:8.3	0.056	1.107	0.062	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-2  
GSM 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.0	29.40	0.17	Right	Cheek	0441M	1:8.3	0.036	1.148	0.041	
1880.00	661	GSM 1900	GSM	30.0	29.40	0.13	Right	Tilt	0441M	1:8.3	0.036	1.148	0.041	
1880.00	661	GSM 1900	GSM	30.0	29.40	0.15	Left	Cheek	0441M	1:8.3	0.042	1.148	0.048	A2
1880.00	661	GSM 1900	GSM	30.0	29.40	0.17	Left	Tilt	0441M	1:8.3	0.034	1.148	0.039	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-3  
UMTS 850 Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Ant State	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	24.0	23.31	0.08	Right	Cheek	104	0441M	1:1	0.156	1.172	0.183	A3
836.60	4183	UMTS 850	RMC	24.0	23.31	-0.03	Right	Tilt	104	0441M	1:1	0.070	1.172	0.082	
836.60	4183	UMTS 850	RMC	24.0	23.31	0.12	Left	Cheek	104	0441M	1:1	0.111	1.172	0.130	
836.60	4183	UMTS 850	RMC	24.0	23.31	0.05	Left	Tilt	104	0441M	1:1	0.065	1.172	0.076	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 66 of 106

**Table 11-4**  
**LTE Band 12 Head SAR**




MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Ant State	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	24.0	23.41	-0.03	0	Right	Cheek	7	QPSK	1	0	0378M	1:1	0.087	1.146	0.100	
707.50	23095	Mid	LTE Band 12	10	23.0	22.49	0.19	1	Right	Cheek	7	QPSK	25	12	0378M	1:1	0.068	1.125	0.077	
707.50	23095	Mid	LTE Band 12	10	24.0	23.41	0.03	0	Right	Tilt	7	QPSK	1	0	0378M	1:1	0.037	1.146	0.042	
707.50	23095	Mid	LTE Band 12	10	23.0	22.49	-0.10	1	Right	Tilt	7	QPSK	25	12	0378M	1:1	0.030	1.125	0.034	
707.50	23095	Mid	LTE Band 12	10	24.0	23.41	0.18	0	Left	Cheek	7	QPSK	1	0	0378M	1:1	0.096	1.146	0.110	A4
707.50	23095	Mid	LTE Band 12	10	23.0	22.49	0.01	1	Left	Cheek	7	QPSK	25	12	0378M	1:1	0.072	1.125	0.081	
707.50	23095	Mid	LTE Band 12	10	24.0	23.41	0.02	0	Left	Tilt	7	QPSK	1	0	0378M	1:1	0.044	1.146	0.050	
707.50	23095	Mid	LTE Band 12	10	23.0	22.49	0.06	1	Left	Tilt	7	QPSK	25	12	0378M	1:1	0.041	1.125	0.046	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-5**  
**LTE Band 13 Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Ant State	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
																	(W/kg)		(W/kg)	
782.00	23230	Mid	LTE Band 13	10	24.0	23.23	-0.01	0	Right	Cheek	0	QPSK	1	0	0378M	1:1	0.144	1.194	0.172	A5
782.00	23230	Mid	LTE Band 13	10	23.0	22.32	-0.05	1	Right	Cheek	0	QPSK	25	12	0378M	1:1	0.102	1.169	0.119	
782.00	23230	Mid	LTE Band 13	10	24.0	23.23	0.13	0	Right	Tilt	0	QPSK	1	0	0378M	1:1	0.063	1.194	0.075	
782.00	23230	Mid	LTE Band 13	10	23.0	22.32	-0.07	1	Right	Tilt	0	QPSK	25	12	0378M	1:1	0.044	1.169	0.051	
782.00	23230	Mid	LTE Band 13	10	24.0	23.23	0.12	0	Left	Cheek	0	QPSK	1	0	0378M	1:1	0.090	1.194	0.107	
782.00	23230	Mid	LTE Band 13	10	23.0	22.32	0.04	1	Left	Cheek	0	QPSK	25	12	0378M	1:1	0.080	1.169	0.094	
782.00	23230	Mid	LTE Band 13	10	24.0	23.23	0.11	0	Left	Tilt	0	QPSK	1	0	0378M	1:1	0.054	1.194	0.064	
782.00	23230	Mid	LTE Band 13	10	23.0	22.32	0.03	1	Left	Tilt	0	QPSK	25	12	0378M	1:1	0.044	1.169	0.051	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-6**  
**LTE Band 5 (Cell) Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Ant State	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
																	(W/kg)		(W/kg)	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.43	0.08	0	Right	Cheek	0	QPSK	1	0	0378M	1:1	0.154	1.140	0.176	A6
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	22.38	-0.11	1	Right	Cheek	0	QPSK	25	12	0378M	1:1	0.118	1.153	0.136	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.43	-0.04	0	Right	Tilt	0	QPSK	1	0	0378M	1:1	0.074	1.140	0.084	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	22.38	0.03	1	Right	Tilt	0	QPSK	25	12	0378M	1:1	0.056	1.153	0.065	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.43	0.15	0	Left	Cheek	0	QPSK	1	0	0378M	1:1	0.097	1.140	0.111	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	22.38	0.13	1	Left	Cheek	0	QPSK	25	12	0378M	1:1	0.081	1.153	0.093	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.43	0.16	0	Left	Tilt	0	QPSK	1	0	0378M	1:1	0.064	1.140	0.073	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	22.38	0.07	1	Left	Tilt	0	QPSK	25	12	0378M	1:1	0.051	1.153	0.059	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Head											
Spatial Peak									1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population									averaged over 1 gram											

FCC ID: A3LSMG986JPN	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 67 of 106

**Table 11-7**  
**LTE Band 4 (AWS) Head SAR**



MEASUREMENT RESULTS																				
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Ant State	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
																	(W/kg)		(W/kg)	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.90	-0.17	0	Right	Cheek	24	QPSK	1	50	0378M	1:1	0.073	1.148	0.084	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.02	0.05	1	Right	Cheek	24	QPSK	50	25	0378M	1:1	0.055	1.117	0.061	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.90	0.01	0	Right	Tilt	24	QPSK	1	50	0378M	1:1	0.065	1.148	0.075	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.02	0.15	1	Right	Tilt	24	QPSK	50	25	0378M	1:1	0.053	1.117	0.059	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.90	0.10	0	Left	Cheek	24	QPSK	1	50	0378M	1:1	0.135	1.148	0.155	A7
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.02	0.19	1	Left	Cheek	24	QPSK	50	25	0378M	1:1	0.108	1.117	0.121	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.90	-0.15	0	Left	Tilt	24	QPSK	1	50	0378M	1:1	0.063	1.148	0.072	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.02	0.12	1	Left	Tilt	24	QPSK	50	25	0378M	1:1	0.049	1.117	0.055	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-8**  
**LTE Band 41 Head SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
		MHz	Ch.	(W/kg)														(W/kg)			
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	23.86	0.11	0	Right	Cheek	QPSK	1	50	1157M	1:1.58	0.042	1.300	0.055	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.0	22.97	0.13	1	Right	Cheek	QPSK	50	25	1157M	1:1.58	0.033	1.268	0.042	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	23.86	0.15	0	Right	Tilt	QPSK	1	50	1157M	1:1.58	0.046	1.300	0.060	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.0	22.97	0.18	1	Right	Tilt	QPSK	50	25	1157M	1:1.58	0.038	1.268	0.048	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	23.57	0.17	0	Left	Cheek	QPSK	1	0	1157M	1:1.58	0.067	1.390	0.093	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	23.86	0.15	0	Left	Cheek	QPSK	1	50	1157M	1:1.58	0.075	1.300	0.098	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.0	22.97	0.11	1	Left	Cheek	QPSK	50	25	1157M	1:1.58	0.060	1.268	0.076	
2 CC Uplink	PCC	2593.00	40620	Mid	LTE Band 41	20	25.0	24.35	-0.02	0	Left	Cheek	QPSK	1	0	1157M	1:1.58	0.077	1.161	0.089	A8
	SCC	2573.20	40422	Mid	LTE Band 41	20								1	99						
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	23.86	0.17	0	Left	Tilt	QPSK	1	50	1157M	1:1.58	0.026	1.300	0.034	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.0	22.97	0.15	1	Left	Tilt	QPSK	50	25	1157M	1:1.58	0.019	1.268	0.024	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-9**  
**DTS Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2462	11	802.11b	DSSS	22	17.0	16.95	-0.14	Right	Cheek	1	0899M	1	99.9	0.712	0.351	1.012	1.001	0.356	
2462	11	802.11b	DSSS	22	17.0	16.95	-0.18	Right	Tilt	1	0899M	1	99.9	1.938	0.560	1.012	1.001	0.567	A9
2462	11	802.11b	DSSS	22	17.0	16.95	0.15	Left	Cheek	1	0899M	1	99.9	0.428	-	1.012	1.001	-	
2462	11	802.11b	DSSS	22	17.0	16.95	0.09	Left	Tilt	1	0899M	1	99.9	0.661	-	1.012	1.001	-	
2412	1	802.11b	DSSS	22	17.0	16.36	0.19	Right	Cheek	2	0899M	1	99.9	0.020	-	1.159	1.001	-	
2412	1	802.11b	DSSS	22	17.0	16.36	0.16	Right	Tilt	2	0899M	1	99.9	0.031	0.016	1.159	1.001	0.019	
2412	1	802.11b	DSSS	22	17.0	16.36	0.11	Left	Cheek	2	0899M	1	99.9	0.017	-	1.159	1.001	-	
2412	1	802.11b	DSSS	22	17.0	16.36	0.05	Left	Tilt	2	0899M	1	99.9	0.028	-	1.159	1.001	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 68 of 106





**Table 11-10  
NII Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5270	54	802.11n	OFDM	40	14.0	13.92	0.14	Right	Cheek	1	0936M	13.5	97.3	0.379	-	1.019	1.028	-	
5270	54	802.11n	OFDM	40	14.0	13.92	0.18	Right	Tilt	1	0936M	13.5	97.3	0.511	0.222	1.019	1.028	0.233	A10
5270	54	802.11n	OFDM	40	14.0	13.92	-0.01	Left	Cheek	1	0936M	13.5	97.3	0.140	-	1.019	1.028	-	
5270	54	802.11n	OFDM	40	14.0	13.92	0.16	Left	Tilt	1	0936M	13.5	97.3	0.184	-	1.019	1.028	-	
5270	54	802.11n	OFDM	40	14.0	13.78	0.12	Right	Cheek	2	0936M	13.5	97.4	0.055	0.027	1.052	1.027	0.029	
5270	54	802.11n	OFDM	40	14.0	13.78	0.15	Right	Tilt	2	0936M	13.5	97.4	0.040	-	1.052	1.027	-	
5270	54	802.11n	OFDM	40	14.0	13.78	0.19	Left	Cheek	2	0936M	13.5	97.4	0.023	-	1.052	1.027	-	
5270	54	802.11n	OFDM	40	14.0	13.78	0.10	Left	Tilt	2	0936M	13.5	97.4	0.036	-	1.052	1.027	-	
5690	138	802.11ac	OFDM	80	14.0	13.63	0.12	Right	Cheek	1	0936M	29.3	94.7	0.330	-	1.089	1.056	-	
5690	138	802.11ac	OFDM	80	14.0	13.63	0.11	Right	Tilt	1	0936M	29.3	94.7	0.441	0.212	1.089	1.056	0.244	
5690	138	802.11ac	OFDM	80	14.0	13.63	0.13	Left	Cheek	1	0936M	29.3	94.7	0.157	-	1.089	1.056	-	
5690	138	802.11ac	OFDM	80	14.0	13.63	0.19	Left	Tilt	1	0936M	29.3	94.7	0.210	-	1.089	1.056	-	
5690	138	802.11ac	OFDM	80	14.0	13.37	0.10	Right	Cheek	2	0936M	29.3	94.7	0.054	0.013	1.156	1.056	0.016	
5690	138	802.11ac	OFDM	80	14.0	13.37	0.17	Right	Tilt	2	0936M	29.3	94.7	0.014	-	1.156	1.056	-	
5690	138	802.11ac	OFDM	80	14.0	13.37	-0.05	Left	Cheek	2	0936M	29.3	94.7	0.015	-	1.156	1.056	-	
5690	138	802.11ac	OFDM	80	14.0	13.37	-0.01	Left	Tilt	2	0936M	29.3	94.7	0.018	-	1.156	1.056	-	
5775	155	802.11ac	OFDM	80	14.0	13.24	0.11	Right	Cheek	1	0936M	29.3	94.7	0.394	-	1.191	1.056	-	
5775	155	802.11ac	OFDM	80	14.0	13.24	0.17	Right	Tilt	1	0936M	29.3	94.7	0.451	0.201	1.191	1.056	0.253	
5775	155	802.11ac	OFDM	80	14.0	13.24	0.15	Left	Cheek	1	0936M	29.3	94.7	0.169	-	1.191	1.056	-	
5775	155	802.11ac	OFDM	80	14.0	13.24	0.13	Left	Tilt	1	0936M	29.3	94.7	0.229	-	1.191	1.056	-	
5775	155	802.11ac	OFDM	80	14.0	13.58	0.01	Right	Cheek	2	0936M	29.3	94.7	0.027	0.007	1.102	1.056	0.008	
5775	155	802.11ac	OFDM	80	14.0	13.58	-0.02	Right	Tilt	2	0936M	29.3	94.7	0.016	-	1.102	1.056	-	
5775	155	802.11ac	OFDM	80	14.0	13.58	-0.05	Left	Cheek	2	0936M	29.3	94.7	0.021	-	1.102	1.056	-	
5775	155	802.11ac	OFDM	80	14.0	13.58	0.04	Left	Tilt	2	0936M	29.3	94.7	0.016	-	1.102	1.056	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-11  
DSS Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2441	39	Bluetooth	FHSS	15.0	14.91	0.04	Right	Cheek	0936M	1	77.1	0.212	1.021	1.297	0.281	
2441	39	Bluetooth	FHSS	15.0	14.91	-0.06	Right	Tilt	0936M	1	77.1	0.253	1.021	1.297	0.335	A11
2441	39	Bluetooth	FHSS	15.0	14.91	0.19	Left	Cheek	0936M	1	77.1	0.114	1.021	1.297	0.151	
2441	39	Bluetooth	FHSS	15.0	14.91	0.15	Left	Tilt	0936M	1	77.1	0.146	1.021	1.297	0.193	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 69 of 106

## 11.2 Standalone Body-Worn SAR Data

**Table 11-12**  
**GSM/UMTS Body-Worn SAR Data**



MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Ant State	Device Serial Number	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.											(W/kg)			
836.60	190	GSM 850	GSM	33.0	32.56	-0.01	15 mm	N/A	0588M	1:8.3	back	0.164	1.107	0.182	A12
1880.00	661	GSM 1900	GSM	30.0	29.40	-0.08	15 mm	N/A	0381M	1:8.3	back	0.258	1.148	0.296	A14
836.60	4183	UMTS 850	RMC	24.0	23.31	-0.05	15 mm	104	0381M	1:1	back	0.193	1.172	0.226	A16
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-13**  
**LTE Body-Worn SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Ant State	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	24.0	23.41	-0.06	0	7	0387M	QPSK	1	0	15 mm	back	1:1	0.160	1.146	0.183	A18
707.50	23095	Mid	LTE Band 12	10	23.0	22.49	0.00	1	7	0387M	QPSK	25	12	15 mm	back	1:1	0.131	1.125	0.147	
782.00	23230	Mid	LTE Band 13	10	24.0	23.23	0.01	0	0	0387M	QPSK	1	0	15 mm	back	1:1	0.191	1.194	0.228	A20
782.00	23230	Mid	LTE Band 13	10	23.0	22.32	0.00	1	0	0387M	QPSK	25	12	15 mm	back	1:1	0.156	1.169	0.182	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.43	-0.02	0	0	0387M	QPSK	1	0	15 mm	back	1:1	0.167	1.140	0.190	A22
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	22.38	-0.01	1	0	0387M	QPSK	25	12	15 mm	back	1:1	0.138	1.153	0.159	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.90	-0.03	0	62	0375M	QPSK	1	50	15 mm	back	1:1	0.616	1.148	0.707	A24
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.02	-0.02	1	62	0375M	QPSK	50	25	15 mm	back	1:1	0.507	1.117	0.566	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak										Body 1.6 W/kg (mW/g) averaged over 1 gram										
Uncontrolled Exposure/General Population																				

**Table 11-14**  
**LTE Band 41 Body-Worn SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		Mhz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	23.57	0.04	0	1157M	QPSK	1	0	15 mm	back	1:1.58	0.266	1.390	0.370	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	23.86	0.03	0	1157M	QPSK	1	50	15 mm	back	1:1.58	0.285	1.300	0.371	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.0	22.97	0.03	1	1157M	QPSK	50	25	15 mm	back	1:1.58	0.232	1.268	0.294	
2 CC Uplink	PCC	2593.00	40620	Mid	LTE Band 41	20	25.0	24.35	0.05	0	1157M	QPSK	1	0	15 mm	back	1:1.58	0.304	1.161	0.353	A26
	SCC	2573.20	40422	Mid	LTE Band 41	20							1	99							
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	Page 70 of 106	

**Table 11-15  
DTS Body-Worn SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2462	11	802.11b	DSSS	22	19.0	18.65	-0.05	15 mm	1	0899M	1	back	99.9	0.174	0.121	1.084	1.001	0.131	A28
2437	6	802.11b	DSSS	22	19.0	18.56	0.01	15 mm	2	0899M	1	back	99.9	0.123	0.095	1.107	1.001	0.105	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-16  
NII Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)		(W/kg)		
5280	56	802.11a	OFDM	20	18.0	17.96	0.19	15 mm	1	0936M	6	back	98.8	0.357	0.160	1.009	1.012	0.163	
5280	56	802.11a	OFDM	20	18.0	17.35	-0.08	15 mm	2	0936M	6	back	98.9	0.481	0.233	1.161	1.011	0.273	
5520	104	802.11a	OFDM	20	18.0	17.97	0.02	15 mm	1	0936M	6	back	98.8	0.316	0.148	1.007	1.012	0.151	
5520	104	802.11a	OFDM	20	18.0	17.77	0.09	15 mm	2	0936M	6	back	98.9	0.563	0.247	1.054	1.011	0.263	
5745	149	802.11a	OFDM	20	18.0	17.98	-0.01	15 mm	1	0936M	6	back	98.8	0.563	0.265	1.005	1.012	0.270	
5785	157	802.11a	OFDM	20	18.0	17.25	0.05	15 mm	2	0936M	6	back	98.9	0.675	0.287	1.189	1.011	0.345	A30
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-17  
DSS Body-Worn SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2441	39	Bluetooth	FHSS	15.0	14.91	0.14	15 mm	0936M	1	back	77.1	0.013	1.021	1.297	0.017	A32
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 71 of 106



## 11.3 Standalone Hotspot SAR Data

**Table 11-18**  
**GPRS/UMTS Hotspot SAR Data**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Ant State	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
836.60	190	GSM 850	GPRS	30.0	29.30	0.01	10 mm	N/A	0588M	3	1:2.76	back	0.301	1.175	0.354	A13
836.60	190	GSM 850	GPRS	30.0	29.30	-0.03	10 mm	N/A	0588M	3	1:2.76	front	0.207	1.175	0.243	
836.60	190	GSM 850	GPRS	30.0	29.30	0.18	10 mm	N/A	0588M	3	1:2.76	bottom	0.171	1.175	0.201	
836.60	190	GSM 850	GPRS	30.0	29.30	-0.15	10 mm	N/A	0588M	3	1:2.76	right	0.183	1.175	0.215	
836.60	190	GSM 850	GPRS	30.0	29.30	0.15	10 mm	N/A	0588M	3	1:2.76	left	0.070	1.175	0.082	
1880.00	661	GSM 1900	GPRS	23.0	22.18	-0.11	10 mm	N/A	0588M	4	1:2.076	back	0.288	1.208	0.348	
1880.00	661	GSM 1900	GPRS	23.0	22.18	0.10	10 mm	N/A	0588M	4	1:2.076	front	0.235	1.208	0.284	
1850.20	512	GSM 1900	GPRS	23.0	21.81	0.12	10 mm	N/A	0588M	4	1:2.076	bottom	0.554	1.315	0.729	
1880.00	661	GSM 1900	GPRS	23.0	22.18	-0.04	10 mm	N/A	0588M	4	1:2.076	bottom	0.762	1.208	0.920	
1909.80	810	GSM 1900	GPRS	23.0	22.12	0.00	10 mm	N/A	0588M	4	1:2.076	bottom	0.782	1.225	0.958	A15
1880.00	661	GSM 1900	GPRS	23.0	22.18	-0.13	10 mm	N/A	0588M	4	1:2.076	right	0.044	1.208	0.053	
1880.00	661	GSM 1900	GPRS	23.0	22.18	0.12	10 mm	N/A	0588M	4	1:2.076	left	0.037	1.208	0.045	
836.60	4183	UMTS 850	RMC	24.0	23.31	-0.07	10 mm	104	0381M	N/A	1:1	back	0.395	1.172	0.463	A17
836.60	4183	UMTS 850	RMC	24.0	23.31	0.00	10 mm	104	0381M	N/A	1:1	front	0.293	1.172	0.343	
836.60	4183	UMTS 850	RMC	24.0	23.31	0.02	10 mm	104	0381M	N/A	1:1	bottom	0.220	1.172	0.258	
836.60	4183	UMTS 850	RMC	24.0	23.31	0.01	10 mm	104	0381M	N/A	1:1	right	0.208	1.172	0.244	
836.60	4183	UMTS 850	RMC	24.0	23.31	0.00	10 mm	104	0381M	N/A	1:1	left	0.076	1.172	0.089	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-19**  
**LTE Band 12 Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Ant State	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
																	(W/kg)		(W/kg)	
MHz	Ch.																			
707.50	23095	Mid	LTE Band 12	10	24.0	23.41	-0.13	0	7	0464M	QPSK	1	0	10 mm	back	1:1	0.200	1.146	0.229	A19
707.50	23095	Mid	LTE Band 12	10	23.0	22.49	-0.05	1	7	0464M	QPSK	25	12	10 mm	back	1:1	0.180	1.125	0.203	
707.50	23095	Mid	LTE Band 12	10	24.0	23.41	0.01	0	7	0464M	QPSK	1	0	10 mm	front	1:1	0.185	1.146	0.212	
707.50	23095	Mid	LTE Band 12	10	23.0	22.49	-0.04	1	7	0464M	QPSK	25	12	10 mm	front	1:1	0.150	1.125	0.169	
707.50	23095	Mid	LTE Band 12	10	24.0	23.41	-0.02	0	7	0464M	QPSK	1	0	10 mm	bottom	1:1	0.115	1.146	0.132	
707.50	23095	Mid	LTE Band 12	10	23.0	22.49	-0.02	1	7	0464M	QPSK	25	12	10 mm	bottom	1:1	0.097	1.125	0.109	
707.50	23095	Mid	LTE Band 12	10	24.0	23.41	0.03	0	7	0464M	QPSK	1	0	10 mm	right	1:1	0.199	1.146	0.228	
707.50	23095	Mid	LTE Band 12	10	23.0	22.49	-0.06	1	7	0464M	QPSK	25	12	10 mm	right	1:1	0.162	1.125	0.182	
707.50	23095	Mid	LTE Band 12	10	24.0	23.41	-0.03	0	7	0464M	QPSK	1	0	10 mm	left	1:1	0.120	1.146	0.138	
707.50	23095	Mid	LTE Band 12	10	23.0	22.49	-0.03	1	7	0464M	QPSK	25	12	10 mm	left	1:1	0.096	1.125	0.108	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram												



FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 72 of 106

**Table 11-20**  
**LTE Band 13 Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Ant State	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	24.0	23.23	-0.07	0	0	0387M	QPSK	1	0	10 mm	back	1:1	0.298	1.194	0.356	A21
782.00	23230	Mid	LTE Band 13	10	23.0	22.32	-0.10	1	0	0387M	QPSK	25	12	10 mm	back	1:1	0.245	1.169	0.286	
782.00	23230	Mid	LTE Band 13	10	24.0	23.23	0.03	0	0	0387M	QPSK	1	0	10 mm	front	1:1	0.225	1.194	0.269	
782.00	23230	Mid	LTE Band 13	10	23.0	22.32	0.03	1	0	0387M	QPSK	25	12	10 mm	front	1:1	0.184	1.169	0.215	
782.00	23230	Mid	LTE Band 13	10	24.0	23.23	-0.10	0	0	0387M	QPSK	1	0	10 mm	bottom	1:1	0.177	1.194	0.211	
782.00	23230	Mid	LTE Band 13	10	23.0	22.32	-0.05	1	0	0387M	QPSK	25	12	10 mm	bottom	1:1	0.146	1.169	0.171	
782.00	23230	Mid	LTE Band 13	10	24.0	23.23	0.02	0	0	0387M	QPSK	1	0	10 mm	right	1:1	0.217	1.194	0.259	
782.00	23230	Mid	LTE Band 13	10	23.0	22.32	0.05	1	0	0387M	QPSK	25	12	10 mm	right	1:1	0.163	1.169	0.191	
782.00	23230	Mid	LTE Band 13	10	24.0	23.23	-0.13	0	0	0387M	QPSK	1	0	10 mm	left	1:1	0.103	1.194	0.123	
782.00	23230	Mid	LTE Band 13	10	23.0	22.32	0.03	1	0	0387M	QPSK	25	12	10 mm	left	1:1	0.083	1.169	0.097	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body 1.6 W/kg (mW/g) averaged over 1 gram												
Spatial Peak Uncontrolled Exposure/General Population																				

**Table 11-21**  
**LTE Band 5 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Ch.	Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Ant State	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz																	(W/kg)		(W/kg)	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.43	-0.09	0	0	0387M	QPSK	1	0	10 mm	back	1:1	0.364	1.140	0.415	A23
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	22.38	-0.11	1	0	0387M	QPSK	25	12	10 mm	back	1:1	0.304	1.153	0.351	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.43	0.01	0	0	0387M	QPSK	1	0	10 mm	front	1:1	0.250	1.140	0.285	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	22.38	0.01	1	0	0387M	QPSK	25	12	10 mm	front	1:1	0.210	1.153	0.242	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.43	-0.05	0	0	0387M	QPSK	1	0	10 mm	bottom	1:1	0.214	1.140	0.244	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	22.38	-0.05	1	0	0387M	QPSK	25	12	10 mm	bottom	1:1	0.179	1.153	0.206	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.43	0.03	0	0	0387M	QPSK	1	0	10 mm	right	1:1	0.192	1.140	0.219	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	22.38	-0.07	1	0	0387M	QPSK	25	12	10 mm	right	1:1	0.145	1.153	0.167	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.0	23.43	-0.19	0	0	0387M	QPSK	1	0	10 mm	left	1:1	0.087	1.140	0.099	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.0	22.38	0.03	1	0	0387M	QPSK	25	12	10 mm	left	1:1	0.058	1.153	0.067	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram												

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 73 of 106




**Table 11-22**  
**LTE Band 4 (AWS) Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Ant State	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.91	-0.04	0	62	0378M	QPSK	1	50	10 mm	back	1:1	0.621	1.146	0.712	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.04	-0.01	0	62	0378M	QPSK	50	25	10 mm	back	1:1	0.637	1.112	0.708	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.91	-0.06	0	62	0378M	QPSK	1	50	10 mm	front	1:1	0.506	1.146	0.580	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.04	-0.03	0	62	0378M	QPSK	50	25	10 mm	front	1:1	0.518	1.112	0.576	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.91	-0.09	0	62	0378M	QPSK	1	50	10 mm	bottom	1:1	1.060	1.146	1.215	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.04	0.00	0	62	0378M	QPSK	50	25	10 mm	bottom	1:1	1.080	1.112	1.201	A25
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.90	-0.02	0	62	0378M	QPSK	100	0	10 mm	bottom	1:1	1.050	1.148	1.205	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.91	-0.01	0	62	0378M	QPSK	1	50	10 mm	right	1:1	0.082	1.146	0.094	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.04	0.17	0	62	0378M	QPSK	50	25	10 mm	right	1:1	0.082	1.112	0.091	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.91	0.16	0	62	0378M	QPSK	1	50	10 mm	left	1:1	0.083	1.146	0.095	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.04	0.07	0	62	0378M	QPSK	50	25	10 mm	left	1:1	0.089	1.112	0.099	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.04	0.15	0	62	0378M	QPSK	50	25	10 mm	bottom	1:1	1.030	1.112	1.145	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body											
Spatial Peak									1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population									averaged over 1 gram											

Note: Blue entries represent variability measurements.

**Table 11-23**  
**LTE Band 41 Hotspot SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	22.0	20.83	0.00	0	1157M	QPSK	1	50	10 mm	back	1:1.58	0.225	1.309	0.295	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	22.0	20.98	0.06	0	1157M	QPSK	50	25	10 mm	back	1:1.58	0.230	1.265	0.291	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	22.0	20.83	0.01	0	1157M	QPSK	1	50	10 mm	front	1:1.58	0.189	1.309	0.247	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	22.0	20.98	0.10	0	1157M	QPSK	50	25	10 mm	front	1:1.58	0.196	1.265	0.248	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	22.0	20.50	-0.01	0	1157M	QPSK	1	0	10 mm	bottom	1:1.58	0.760	1.413	1.074	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	22.0	20.49	0.05	0	1157M	QPSK	1	99	10 mm	bottom	1:1.58	0.705	1.416	0.998	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	22.0	20.67	-0.02	0	1157M	QPSK	1	0	10 mm	bottom	1:1.58	0.676	1.358	0.918	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	22.0	20.83	-0.01	0	1157M	QPSK	1	50	10 mm	bottom	1:1.58	0.473	1.309	0.619	
1 CC Uplink	N/A	2636.50	41055	Mid-High	LTE Band 41	20	22.0	20.80	0.01	0	1157M	QPSK	1	50	10 mm	bottom	1:1.58	0.577	1.318	0.760	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	22.0	20.67	-0.02	0	1157M	QPSK	1	50	10 mm	bottom	1:1.58	0.657	1.358	0.892	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	22.0	20.60	0.07	0	1157M	QPSK	50	0	10 mm	bottom	1:1.58	0.761	1.380	1.050	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	22.0	20.96	-0.01	0	1157M	QPSK	50	25	10 mm	bottom	1:1.58	0.664	1.271	0.844	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	22.0	20.98	-0.01	0	1157M	QPSK	50	25	10 mm	bottom	1:1.58	0.483	1.265	0.611	
1 CC Uplink	N/A	2636.50	41055	Mid-High	LTE Band 41	20	22.0	20.94	0.00	0	1157M	QPSK	50	25	10 mm	bottom	1:1.58	0.592	1.276	0.755	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	22.0	20.87	0.02	0	1157M	QPSK	50	25	10 mm	bottom	1:1.58	0.688	1.297	0.892	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	22.0	20.82	-0.05	0	1157M	QPSK	100	0	10 mm	bottom	1:1.58	0.474	1.312	0.622	
2 CC Uplink	PCC	2506.00	39750	Low	LTE Band 41	20	22.0	21.07	-0.11	0	1157M	QPSK	1	99	10 mm	bottom	1:1.58	0.768	1.239	0.952	A27
	SCC	2525.80	39948	Low	LTE Band 41	20							1	0							
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	22.0	20.83	0.10	0	1157M	QPSK	1	50	10 mm	left	1:1.58	0.075	1.309	0.098	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	22.0	20.98	0.04	0	1157M	QPSK	50	25	10 mm	left	1:1.58	0.079	1.265	0.100	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																					
Spatial Peak										Body											
Uncontrolled Exposure/General Population										1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: A3LSMG986JPN	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 74 of 106



**Table 11-24**  
**WLAN Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2462	11	802.11b	DSSS	22	19.0	18.65	0.00	10 mm	1	0899M	1	back	99.9	0.294	0.205	1.084	1.001	0.222	
2462	11	802.11b	DSSS	22	19.0	18.65	0.02	10 mm	1	0899M	1	front	99.9	0.234	-	1.084	1.001	-	
2462	11	802.11b	DSSS	22	19.0	18.65	0.01	10 mm	1	0899M	1	top	99.9	0.578	0.357	1.084	1.001	0.387	A29
2462	11	802.11b	DSSS	22	19.0	18.65	0.02	10 mm	1	0899M	1	left	99.9	0.110	-	1.084	1.001	-	
2437	6	802.11b	DSSS	22	19.0	18.56	0.00	10 mm	2	0899M	1	back	99.9	0.280	0.237	1.107	1.001	0.263	
2437	6	802.11b	DSSS	22	19.0	18.56	0.16	10 mm	2	0899M	1	front	99.9	0.020	-	1.107	1.001	-	
2437	6	802.11b	DSSS	22	19.0	18.56	0.16	10 mm	2	0899M	1	top	99.9	0.043	-	1.107	1.001	-	
2437	6	802.11b	DSSS	22	19.0	18.56	0.08	10 mm	2	0899M	1	left	99.9	0.069	-	1.107	1.001	-	
5745	149	802.11a	OFDM	20	18.0	17.98	-0.19	10 mm	1	0936M	6	back	98.8	0.857	0.428	1.005	1.012	0.435	
5745	149	802.11a	OFDM	20	18.0	17.98	0.14	10 mm	1	0936M	6	front	98.8	0.282	-	1.005	1.012	-	
5745	149	802.11a	OFDM	20	18.0	17.98	0.18	10 mm	1	0936M	6	top	98.8	0.614	-	1.005	1.012	-	
5745	149	802.11a	OFDM	20	18.0	17.98	0.17	10 mm	1	0936M	6	left	98.8	1.222	0.503	1.005	1.012	0.512	
5785	157	802.11a	OFDM	20	18.0	17.25	0.06	10 mm	2	0936M	6	back	98.9	1.086	0.456	1.189	1.011	0.548	
5785	157	802.11a	OFDM	20	18.0	17.25	-0.14	10 mm	2	0936M	6	front	98.9	0.033	-	1.189	1.011	-	
5785	157	802.11a	OFDM	20	18.0	17.25	-0.17	10 mm	2	0936M	6	top	98.9	0.085	-	1.189	1.011	-	
5785	157	802.11a	OFDM	20	18.0	17.25	-0.16	10 mm	2	0936M	6	left	98.9	0.273	0.132	1.189	1.011	0.159	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

**Table 11-25**  
**WLAN MIMO Hotspot SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.															W/kg	(W/kg)			(W/kg)	
5745	149	802.11n	OFDM	20	18.0	17.35	18.0	17.36	0.16	10 mm	MIMO	0936M	13	back	98.7	1.140	0.524	1.161	1.013	0.616	
5785	157	802.11n	OFDM	20	18.0	17.74	18.0	17.19	0.15	10 mm	MIMO	0936M	13	back	98.7	1.334	0.582	1.205	1.013	0.710	
5825	165	802.11n	OFDM	20	18.0	17.84	18.0	17.96	0.11	10 mm	MIMO	0936M	13	back	98.7	1.375	0.620	1.038	1.013	0.652	A31
5825	165	802.11n	OFDM	20	18.0	17.84	18.0	17.96	0.13	10 mm	MIMO	0936M	13	front	98.7	0.314	-	1.038	1.013	-	
5825	165	802.11n	OFDM	20	18.0	17.84	18.0	17.96	0.17	10 mm	MIMO	0936M	13	top	98.7	0.667	-	1.038	1.013	-	
5825	165	802.11n	OFDM	20	18.0	17.84	18.0	17.96	0.12	10 mm	MIMO	0936M	13	left	98.7	1.216	0.514	1.038	1.013	0.540	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body											
Spatial Peak										1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population										averaged over 1 gram											

Note: To achieve the 21.0 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 18.0 dBm.

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 75 of 106




**Table 11-26**  
**WLAN Hotspot SAR for Conditions with 2.4 GHz and 5 GHz WLAN SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.															W/kg	(W/kg)			(W/kg)	
5775	155	802.11ac	OFDM	80	14.0	13.24	14.0	13.58	0.04	10 mm	MIMO	0936M	58.5	back	91.2	0.429	0.203	1.191	1.096	0.265	
5775	155	802.11ac	OFDM	80	14.0	13.24	14.0	13.58	-0.13	10 mm	MIMO	0936M	58.5	front	91.2	0.081	-	1.191	1.096	-	
5775	155	802.11ac	OFDM	80	14.0	13.24	14.0	13.58	-0.19	10 mm	MIMO	0936M	58.5	top	91.2	0.179	-	1.191	1.096	-	
5775	155	802.11ac	OFDM	80	14.0	13.24	14.0	13.58	0.14	10 mm	MIMO	0936M	58.5	left	91.2	0.358	-	1.191	1.096	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																					
Spatial Peak										Body											
Uncontrolled Exposure/General Population										1.6 W/kg (mW/g)											
										averaged over 1 gram											

Note: NII MIMO was additionally evaluated at the maximum allowed output power during operations with Simultaneous 2.4 GHz and 5 GHz WLAN. 2.4 GHz WIFI was not transmitting during the above evaluations.

**Table 11-27**  
**DSS Hotspot SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g) (W/kg)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.															
2441	39	Bluetooth	FHSS	15.0	14.91	0.13	10 mm	0936M	1	back	77.1	0.032	1.021	1.297	0.042	
2441	39	Bluetooth	FHSS	15.0	14.91	0.15	10 mm	0936M	1	front	77.1	0.017	1.021	1.297	0.023	
2441	39	Bluetooth	FHSS	15.0	14.91	0.10	10 mm	0936M	1	top	77.1	0.052	1.021	1.297	0.069	A33
2441	39	Bluetooth	FHSS	15.0	14.91	0.18	10 mm	0936M	1	left	77.1	0.012	1.021	1.297	0.016	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram						

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 76 of 106





## 11.4 Standalone Phablet SAR Data

Table 11-28  
GPRS Phablet SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GPRS	26.5	25.05	-0.08	8 mm	0381M	3	1:2.76	back	0.456	1.396	0.637	
1880.00	661	GSM 1900	GPRS	26.5	25.05	-0.11	6 mm	0381M	3	1:2.76	front	0.580	1.396	0.810	
1880.00	661	GSM 1900	GPRS	26.5	25.05	0.03	11 mm	0381M	3	1:2.76	bottom	0.489	1.396	0.683	
1880.00	661	GSM 1900	GPRS	26.5	25.05	-0.09	0 mm	0381M	3	1:2.76	right	0.153	1.396	0.214	
1880.00	661	GSM 1900	GPRS	26.5	25.05	0.00	0 mm	0381M	3	1:2.76	left	0.156	1.396	0.218	
1850.20	512	GSM 1900	GPRS	23.0	21.81	0.14	0 mm	0588M	4	1:2.076	back	1.670	1.315	2.196	
1880.00	661	GSM 1900	GPRS	23.0	22.18	-0.02	0 mm	0588M	4	1:2.076	back	1.830	1.208	2.211	
1909.80	810	GSM 1900	GPRS	23.0	22.12	0.03	0 mm	0588M	4	1:2.076	back	1.980	1.225	2.426	
1850.20	512	GSM 1900	GPRS	23.0	21.81	-0.07	0 mm	0588M	4	1:2.076	front	1.520	1.315	1.999	
1880.00	661	GSM 1900	GPRS	23.0	22.18	-0.07	0 mm	0588M	4	1:2.076	front	1.660	1.208	2.005	
1909.80	810	GSM 1900	GPRS	23.0	22.12	-0.09	0 mm	0588M	4	1:2.076	front	1.790	1.225	2.193	
1850.20	512	GSM 1900	GPRS	23.0	21.81	0.08	0 mm	0588M	4	1:2.076	bottom	2.350	1.315	3.090	
1880.00	661	GSM 1900	GPRS	23.0	22.18	0.03	0 mm	0588M	4	1:2.076	bottom	2.590	1.208	3.129	A34
1909.80	810	GSM 1900	GPRS	23.0	22.12	-0.12	0 mm	0588M	4	1:2.076	bottom	2.470	1.225	3.026	
1880.00	661	GSM 1900	GPRS	23.0	22.18	0.05	0 mm	0588M	4	1:2.076	bottom	2.540	1.208	3.068	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams								




Note: Blue entry represents variability measurement.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 77 of 106

**Table 11-29**  
**LTE B4 Phablet SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Ant State	Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
Mhz	Ch.															(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.90	-0.04	0	62	0375M	QPSK	1	50	8 mm	back	1:1	0.886	1.148	1.017	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.02	0.00	1	62	0375M	QPSK	50	25	8 mm	back	1:1	0.724	1.117	0.809	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.90	-0.09	0	62	0375M	QPSK	1	50	6 mm	front	1:1	0.947	1.148	1.087	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.02	-0.07	1	62	0375M	QPSK	50	25	6 mm	front	1:1	0.773	1.117	0.863	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.90	0.01	0	62	0375M	QPSK	1	50	11 mm	bottom	1:1	0.975	1.148	1.119	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.02	-0.01	1	62	0375M	QPSK	50	25	11 mm	bottom	1:1	0.792	1.117	0.885	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.90	0.04	0	62	0375M	QPSK	1	50	0 mm	right	1:1	0.355	1.148	0.408	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.02	0.02	1	62	0375M	QPSK	50	25	0 mm	right	1:1	0.292	1.117	0.326	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.90	-0.01	0	62	0375M	QPSK	1	50	0 mm	left	1:1	0.399	1.148	0.458	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	22.02	-0.01	1	62	0375M	QPSK	50	25	0 mm	left	1:1	0.322	1.117	0.360	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.91	0.01	0	62	0378M	QPSK	1	50	0 mm	back	1:1	1.870	1.146	2.143	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.04	0.01	0	62	0378M	QPSK	50	25	0 mm	back	1:1	1.930	1.112	2.146	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.90	0.02	0	62	0378M	QPSK	100	0	0 mm	back	1:1	1.890	1.148	2.170	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.91	-0.02	0	62	0378M	QPSK	1	50	0 mm	front	1:1	1.790	1.146	2.051	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.04	-0.05	0	62	0378M	QPSK	50	25	0 mm	front	1:1	1.850	1.112	2.057	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.90	-0.06	0	62	0378M	QPSK	100	0	0 mm	front	1:1	1.800	1.148	2.066	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.91	-0.14	0	62	0378M	QPSK	1	50	0 mm	bottom	1:1	2.680	1.146	3.071	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.04	-0.11	0	62	0378M	QPSK	50	25	0 mm	bottom	1:1	2.830	1.112	3.147	A35
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	19.90	-0.10	0	62	0378M	QPSK	100	0	0 mm	bottom	1:1	2.740	1.148	3.146	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	20.5	20.04	-0.15	0	62	0378M	QPSK	50	25	0 mm	bottom	1:1	2.790	1.112	3.102	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Phablet												
Spatial Peak								4.0 W/kg (mW/g)												
Uncontrolled Exposure/General Population								averaged over 10 grams												




Note: Blue entry represents variability measurement.

FCC ID: A3LSMG986JPN	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 78 of 106

**Table 11-30**  
**LTE B41 Phablet SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
		Mhz	Ch.	(W/kg)														(W/kg)			
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	23.86	0.04	0	1157M	QPSK	1	50	8 mm	back	1:1.58	0.305	1.300	0.397	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.0	22.97	0.02	1	1157M	QPSK	50	25	8 mm	back	1:1.58	0.250	1.268	0.317	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	23.86	0.16	0	1157M	QPSK	1	50	6 mm	front	1:1.58	0.437	1.300	0.568	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.0	22.97	-0.03	1	1157M	QPSK	50	25	6 mm	front	1:1.58	0.349	1.268	0.443	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	23.86	-0.19	0	1157M	QPSK	1	50	11 mm	bottom	1:1.58	0.524	1.300	0.681	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.0	22.97	0.06	1	1157M	QPSK	50	25	11 mm	bottom	1:1.58	0.414	1.268	0.525	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	25.0	23.86	-0.02	0	1157M	QPSK	1	50	0 mm	left	1:1.58	0.395	1.300	0.514	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.0	22.97	-0.04	1	1157M	QPSK	50	25	0 mm	left	1:1.58	0.325	1.268	0.412	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.5	23.03	-0.17	0	1157M	QPSK	1	0	0 mm	back	1:1.58	1.710	1.403	2.399	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	23.12	-0.14	0	1157M	QPSK	1	0	0 mm	back	1:1.58	1.620	1.374	2.226	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.5	23.30	-0.10	0	1157M	QPSK	1	50	0 mm	back	1:1.58	1.760	1.318	2.320	
1 CC Uplink	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.5	23.39	-0.12	0	1157M	QPSK	1	50	0 mm	back	1:1.58	1.890	1.291	2.440	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	24.5	23.27	-0.07	0	1157M	QPSK	1	50	0 mm	back	1:1.58	1.780	1.327	2.362	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	22.57	-0.17	0.5	1157M	QPSK	50	0	0 mm	back	1:1.58	1.390	1.390	1.932	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	24.0	22.61	-0.19	0.5	1157M	QPSK	50	0	0 mm	back	1:1.58	1.300	1.377	1.790	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.0	22.93	-0.10	0.5	1157M	QPSK	50	25	0 mm	back	1:1.58	1.700	1.279	2.174	
1 CC Uplink	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.0	23.01	-0.11	0.5	1157M	QPSK	50	25	0 mm	back	1:1.58	1.730	1.256	2.173	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	24.0	22.92	-0.08	0.5	1157M	QPSK	50	25	0 mm	back	1:1.58	1.640	1.282	2.102	
1 CC Uplink	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.0	22.89	-0.18	0.5	1157M	QPSK	100	0	0 mm	back	1:1.58	1.670	1.291	2.156	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.5	23.03	-0.04	0	1157M	QPSK	1	0	0 mm	front	1:1.58	1.200	1.403	1.684	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	23.12	-0.03	0	1157M	QPSK	1	0	0 mm	front	1:1.58	1.210	1.374	1.663	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.5	23.30	0.04	0	1157M	QPSK	1	50	0 mm	front	1:1.58	1.570	1.318	2.069	
1 CC Uplink	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.5	23.39	0.02	0	1157M	QPSK	1	50	0 mm	front	1:1.58	1.640	1.291	2.117	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	24.5	23.27	-0.01	0	1157M	QPSK	1	50	0 mm	front	1:1.58	1.610	1.327	2.136	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	22.57	-0.03	0.5	1157M	QPSK	50	0	0 mm	front	1:1.58	1.100	1.390	1.529	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	24.0	22.61	-0.07	0.5	1157M	QPSK	50	0	0 mm	front	1:1.58	1.100	1.377	1.515	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.0	22.93	0.06	0.5	1157M	QPSK	50	25	0 mm	front	1:1.58	1.450	1.279	1.855	
1 CC Uplink	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.0	23.01	-0.01	0.5	1157M	QPSK	50	25	0 mm	front	1:1.58	1.520	1.256	1.909	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	24.0	22.92	0.04	0.5	1157M	QPSK	50	25	0 mm	front	1:1.58	1.500	1.282	1.923	
1 CC Uplink	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.0	22.89	0.03	0.5	1157M	QPSK	100	0	0 mm	front	1:1.58	1.480	1.291	1.911	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.5	23.03	-0.19	0	1157M	QPSK	1	0	0 mm	bottom	1:1.58	1.640	1.403	2.301	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	24.5	23.12	-0.18	0	1157M	QPSK	1	0	0 mm	bottom	1:1.58	1.690	1.374	2.322	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.5	23.00	-0.12	0	1157M	QPSK	1	0	0 mm	bottom	1:1.58	2.090	1.413	2.953	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.5	23.30	-0.19	0	1157M	QPSK	1	50	0 mm	bottom	1:1.58	2.230	1.318	2.939	
1 CC Uplink	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.5	23.39	-0.16	0	1157M	QPSK	1	50	0 mm	bottom	1:1.58	2.200	1.291	2.840	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	24.5	23.27	-0.15	0	1157M	QPSK	1	50	0 mm	bottom	1:1.58	1.710	1.327	2.269	
1 CC Uplink	N/A	2506.00	39750	Low	LTE Band 41	20	24.0	22.57	-0.12	0.5	1157M	QPSK	50	0	0 mm	bottom	1:1.58	1.520	1.390	2.113	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	24.0	22.61	-0.19	0.5	1157M	QPSK	50	0	0 mm	bottom	1:1.58	1.510	1.377	2.079	
1 CC Uplink	N/A	2593.00	40620	Mid	LTE Band 41	20	24.0	22.93	-0.14	0.5	1157M	QPSK	50	25	0 mm	bottom	1:1.58	2.080	1.279	2.660	
1 CC Uplink	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.0	23.01	-0.14	0.5	1157M	QPSK	50	25	0 mm	bottom	1:1.58	2.170	1.256	2.726	
1 CC Uplink	N/A	2680.00	41490	High	LTE Band 41	20	24.0	22.92	-0.15	0.5	1157M	QPSK	50	25	0 mm	bottom	1:1.58	1.580	1.282	2.026	
1 CC Uplink	N/A	2636.50	41055	Mid-High	LTE Band 41	20	24.0	22.89	-0.16	0.5	1157M	QPSK	100	0	0 mm	bottom	1:1.58	2.120	1.291	2.737	
2 CC Uplink	PCC	2593.00	40620	Mid	LTE Band 41	20	24.5	24.00	-0.14	0	1157M	QPSK	1	0	0 mm	bottom	1:1.58	2.670	1.122	2.996	A36
	SCC	2573.20	40422	Mid	LTE Band 41	20							1	99							
2 CC Uplink	PCC	2593.00	40620	Mid	LTE Band 41	20	24.5	24.00	-0.11	0	1157M	QPSK	1	0	0 mm	bottom	1:1.58	2.630	1.122	2.951	
	SCC	2573.20	40422	Mid	LTE Band 41	20							1	99							
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population													Phablet 4.0 W/kg (mW/g) averaged over 10 grams								

Note: Blue entry represents variability measurement.

FCC ID: A3LSMG986JPN	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 79 of 106



**Table 11-31  
WLAN Phablet SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5280	56	802.11a	OFDM	20	18.0	17.96	0.04	0 mm	1	0936M	6	back	98.8	10.386	1.190	1.009	1.012	1.215	A37
5280	56	802.11a	OFDM	20	18.0	17.96	0.14	0 mm	1	0936M	6	front	98.8	4.732	-	1.009	1.012	-	
5280	56	802.11a	OFDM	20	18.0	17.96	0.17	0 mm	1	0936M	6	top	98.8	12.870	0.741	1.009	1.012	0.757	
5280	56	802.11a	OFDM	20	18.0	17.96	0.10	0 mm	1	0936M	6	left	98.8	12.754	-	1.009	1.012	-	
5280	56	802.11a	OFDM	20	18.0	17.35	0.08	0 mm	2	0936M	6	back	98.9	5.232	1.160	1.161	1.011	1.362	
5280	56	802.11a	OFDM	20	18.0	17.35	0.11	0 mm	2	0936M	6	front	98.9	0.325	-	1.161	1.011	-	
5280	56	802.11a	OFDM	20	18.0	17.35	0.14	0 mm	2	0936M	6	top	98.9	0.395	-	1.161	1.011	-	
5280	56	802.11a	OFDM	20	18.0	17.35	0.05	0 mm	2	0936M	6	left	98.9	2.747	0.241	1.161	1.011	0.283	
5520	104	802.11a	OFDM	20	18.0	17.97	0.15	0 mm	1	0936M	6	back	98.8	10.922	1.150	1.007	1.012	1.172	
5520	104	802.11a	OFDM	20	18.0	17.97	-0.15	0 mm	1	0936M	6	front	98.8	2.766	-	1.007	1.012	-	
5520	104	802.11a	OFDM	20	18.0	17.97	-0.08	0 mm	1	0936M	6	top	98.8	8.122	-	1.007	1.012	-	
5520	104	802.11a	OFDM	20	18.0	17.97	0.19	0 mm	1	0936M	6	left	98.8	17.159	1.110	1.007	1.012	1.131	
5520	104	802.11a	OFDM	20	18.0	17.77	0.14	0 mm	2	0936M	6	back	98.9	17.761	1.080	1.054	1.011	1.151	
5520	104	802.11a	OFDM	20	18.0	17.77	0.15	0 mm	2	0936M	6	front	98.9	0.250	-	1.054	1.011	-	
5520	104	802.11a	OFDM	20	18.0	17.77	0.18	0 mm	2	0936M	6	top	98.9	0.247	-	1.054	1.011	-	
5520	104	802.11a	OFDM	20	18.0	17.77	-0.12	0 mm	2	0936M	6	left	98.9	1.619	0.150	1.054	1.011	0.160	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Phablet 4.0 W/kg (mW/g) averaged over 10 grams											

**Table 11-32  
WLAN MIMO Phablet SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.															W/kg	(W/kg)			(W/kg)	
5280	56	802.11n	OFDM	20	18.0	17.96	18.0	17.37	-0.13	0 mm	MIMO	0936M	13	back	98.7	11.383	-	1.156	1.013	-	
5280	56	802.11n	OFDM	20	18.0	17.96	18.0	17.37	0.14	0 mm	MIMO	0936M	13	front	98.7	3.847	-	1.156	1.013	-	
5280	56	802.11n	OFDM	20	18.0	17.96	18.0	17.37	0.17	0 mm	MIMO	0936M	13	top	98.7	12.706	0.750	1.156	1.013	0.878	
5280	56	802.11n	OFDM	20	18.0	17.96	18.0	17.37	0.12	0 mm	MIMO	0936M	13	left	98.7	10.936	-	1.156	1.013	-	
5520	104	802.11n	OFDM	20	18.0	17.95	18.0	17.81	-0.07	0 mm	MIMO	0936M	13	back	98.7	11.420	-	1.045	1.013	-	
5520	104	802.11n	OFDM	20	18.0	17.95	18.0	17.81	0.15	0 mm	MIMO	0936M	13	front	98.7	2.577	-	1.045	1.013	-	
5520	104	802.11n	OFDM	20	18.0	17.95	18.0	17.81	0.19	0 mm	MIMO	0936M	13	top	98.7	13.125	0.677	1.045	1.013	0.717	
5520	104	802.11n	OFDM	20	18.0	17.95	18.0	17.81	0.12	0 mm	MIMO	0936M	13	left	98.7	13.777	1.070	1.045	1.013	1.133	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT											Phablet										
Spatial Peak											4.0 W/kg (mW/g)										
Uncontrolled Exposure/General Population											averaged over 10 grams										

Note: To achieve the 21.0 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 18.0 dBm.

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 80 of 106




## 11.5 SAR Test Notes

### General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was  $\leq 1.2$  W/kg, no additional body-worn SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg for 1g SAR or 2.0 W/kg for 10g SAR. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
10. Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is  $> 160$  mm and  $< 200$  mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR  $> 1.2$  W/kg.
11. This device supports dynamic antenna tuning for some bands. Per FCC Guidance, SAR was measured according to the normally required SAR measurement configurations with tuner active. The auto-tune state determined by the device was verified before and after each SAR measurement and is listed in tables above. Please see Section 14 for supplemental data.
12. This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.4. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.
13. Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds below.
14. The orange highlights throughout the report represents the highest SAR per FCC Equipment Class reflected on the FCC Grant.
15. Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information).
16. This device uses Qualcomm Smart Transmit for 2G/3G/4G operations to control and manage transmitting power in real time to ensure RF Exposure compliance. Per FCC Guidance, compliance for was assessed at the minimum of the time averaged power and the maximum output power for each band/mode/exposure condition (DSI).

### GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 81 of 106




- Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

#### UMTS Notes:

- UMTS mode was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
- Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

#### LTE Notes:

- LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.5.4.
- MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
- A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
- Per FCC KDB Publication 447498 D01v06, when the reported LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was  $> 0.6$  W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
- TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
- Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not  $> 0.25$  dB higher than the maximum output power when downlink carrier aggregation was inactive.
- For LTE Band 41, per FCC guidance, SAR was first measured with only a single carrier active in the uplink (carrier aggregation not active). For each exposure condition, the uplink CA scenario with two component carriers was additionally tested for the configuration with the highest SAR when carrier aggregation was not active. The SCC was configured with the closest available contiguous channel. The two component carriers were configured so the resource blocks are physically allocated side by side to achieve the maximum output power.




FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 82 of 106

#### WLAN Notes:

1. For held-to-ear, hotspot, and phablet operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n/ax) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.6.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 8.6.6 for more information.
4. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously. Please see Section 12 for complete analysis.
5. When the maximum reported 1g averaged SAR is  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg for 1g evaluations or all test channels were measured.
6. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.
7. When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

#### Bluetooth Notes

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 9.5 for the time domain plot and calculation for the duty factor of the device.
2. Head and Hotspot Bluetooth SAR were evaluated for BT BR tethering applications.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 83 of 106



## 12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

### 12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### 12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is  $\leq 1.6$  W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.




(\*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for the applicable exposure conditions was used for simultaneous transmission analysis.

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

### 12.3 Head SAR Simultaneous Transmission Analysis

**Table 12-1**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.143	0.567	0.019	0.710	0.162	0.729
	GSM 1900	0.048	0.567	0.019	0.615	0.067	0.634
	UMTS 850	0.183	0.567	0.019	0.750	0.202	<b>0.769</b>
	LTE Band 12	0.110	0.567	0.019	0.677	0.129	0.696
	LTE Band 13	0.172	0.567	0.019	0.739	0.191	0.758
	LTE Band 5 (Cell)	0.176	0.567	0.019	0.743	0.195	0.762
	LTE Band 4 (AWS)	0.155	0.567	0.019	0.722	0.174	0.741
	LTE Band 41	0.098	0.567	0.019	0.665	0.117	0.684

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 84 of 106






**Table 12-2**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	0.143	0.253	0.029	0.396	0.172	0.425
	GSM 1900	0.048	0.253	0.029	0.301	0.077	0.330
	UMTS 850	0.183	0.253	0.029	0.436	0.212	<b>0.465</b>
	LTE Band 12	0.110	0.253	0.029	0.363	0.139	0.392
	LTE Band 13	0.172	0.253	0.029	0.425	0.201	0.454
	LTE Band 5 (Cell)	0.176	0.253	0.029	0.429	0.205	0.458
	LTE Band 4 (AWS)	0.155	0.253	0.029	0.408	0.184	0.437
	LTE Band 41	0.098	0.253	0.029	0.351	0.127	0.380

**Table 12-3**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN MIMO and 5 GHz WLAN MIMO (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)
		1	2	3	4	5	1+2+3+4+5
Head SAR	GSM 850	0.143	0.567	0.019	0.253	0.029	1.011
	GSM 1900	0.048	0.567	0.019	0.253	0.029	0.916
	UMTS 850	0.183	0.567	0.019	0.253	0.029	<b>1.051</b>
	LTE Band 12	0.110	0.567	0.019	0.253	0.029	0.978
	LTE Band 13	0.172	0.567	0.019	0.253	0.029	1.040
	LTE Band 5 (Cell)	0.176	0.567	0.019	0.253	0.029	1.044
	LTE Band 4 (AWS)	0.155	0.567	0.019	0.253	0.029	1.023
	LTE Band 41	0.098	0.567	0.019	0.253	0.029	0.966



FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset		Page 85 of 106

**Table 12-4**  
**Simultaneous Transmission Scenario with Bluetooth (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM 850	0.143	0.335	0.478
	GSM 1900	0.048	0.335	0.383
	UMTS 850	0.183	0.335	<b>0.518</b>
	LTE Band 12	0.110	0.335	0.445
	LTE Band 13	0.172	0.335	0.507
	LTE Band 5 (Cell)	0.176	0.335	0.511
	LTE Band 4 (AWS)	0.155	0.335	0.490
	LTE Band 41	0.098	0.335	0.433

**Table 12-5**  
**Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)	
		1	2	3	1+2+3	
Head SAR	GSM 850	0.143	0.335	0.253	0.731	
	GSM 1900	0.048	0.335	0.253	0.636	
	UMTS 850	0.183	0.335	0.253	<b>0.771</b>	
	LTE Band 12	0.110	0.335	0.253	0.698	
	LTE Band 13	0.172	0.335	0.253	0.760	
	LTE Band 5 (Cell)	0.176	0.335	0.253	0.764	
	LTE Band 4 (AWS)	0.155	0.335	0.253	0.743	
	LTE Band 41	0.098	0.335	0.253	0.686	
Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	
		1	2	3	1+2+3	
Head SAR	GSM 850	0.143	0.335	0.029	0.507	
	GSM 1900	0.048	0.335	0.029	0.412	
	UMTS 850	0.183	0.335	0.029	<b>0.547</b>	
	LTE Band 12	0.110	0.335	0.029	0.474	
	LTE Band 13	0.172	0.335	0.029	0.536	
	LTE Band 5 (Cell)	0.176	0.335	0.029	0.540	
	LTE Band 4 (AWS)	0.155	0.335	0.029	0.519	
	LTE Band 41	0.098	0.335	0.029	0.462	
Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	1+2+3+4
Head SAR	GSM 850	0.143	0.335	0.253	0.029	0.760
	GSM 1900	0.048	0.335	0.253	0.029	0.665
	UMTS 850	0.183	0.335	0.253	0.029	<b>0.800</b>
	LTE Band 12	0.110	0.335	0.253	0.029	0.727
	LTE Band 13	0.172	0.335	0.253	0.029	0.789
	LTE Band 5 (Cell)	0.176	0.335	0.253	0.029	0.793
	LTE Band 4 (AWS)	0.155	0.335	0.253	0.029	0.772
	LTE Band 41	0.098	0.335	0.253	0.029	0.715

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 86 of 106	




## 12.4 Body-Worn Simultaneous Transmission Analysis

**Table 12-6**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	GSM 850	0.182	0.131	0.105	0.313	0.287	0.418
	GSM 1900	0.296	0.131	0.105	0.427	0.401	0.532
	UMTS 850	0.226	0.131	0.105	0.357	0.331	0.462
	LTE Band 12	0.183	0.131	0.105	0.314	0.288	0.419
	LTE Band 13	0.228	0.131	0.105	0.359	0.333	0.464
	LTE Band 5 (Cell)	0.190	0.131	0.105	0.321	0.295	0.426
	LTE Band 4 (AWS)	0.707	0.131	0.105	0.838	0.812	<b>0.943</b>
	LTE Band 41	0.371	0.131	0.105	0.502	0.476	0.607

**Table 12-7**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.5 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body-Worn	GSM 850	0.182	0.270	0.345	0.452	0.527	0.797
	GSM 1900	0.296	0.270	0.345	0.566	0.641	0.911
	UMTS 850	0.226	0.270	0.345	0.496	0.571	0.841
	LTE Band 12	0.183	0.270	0.345	0.453	0.528	0.798
	LTE Band 13	0.228	0.270	0.345	0.498	0.573	0.843
	LTE Band 5 (Cell)	0.190	0.270	0.345	0.460	0.535	0.805
	LTE Band 4 (AWS)	0.707	0.270	0.345	0.977	1.052	<b>1.322</b>
	LTE Band 41	0.371	0.270	0.345	0.641	0.716	0.986




FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 87 of 106	

**Table 12-8**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN MIMO and 5 GHz WLAN MIMO**  
**(Body-Worn at 1.5 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	5	1+2+3+4+5
Body-Worn	GSM 850	0.182	0.131	0.105	0.270	0.345	1.033
	GSM 1900	0.296	0.131	0.105	0.270	0.345	1.147
	UMTS 850	0.226	0.131	0.105	0.270	0.345	1.077
	LTE Band 12	0.183	0.131	0.105	0.270	0.345	1.034
	LTE Band 13	0.228	0.131	0.105	0.270	0.345	1.079
	LTE Band 5 (Cell)	0.190	0.131	0.105	0.270	0.345	1.041
	LTE Band 4 (AWS)	0.707	0.131	0.105	0.270	0.345	<b>1.558</b>
	LTE Band 41	0.371	0.131	0.105	0.270	0.345	1.222

**Table 12-9**  
**Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.5 cm)**



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM 850	0.182	0.017	0.199
	GSM 1900	0.296	0.017	0.313
	UMTS 850	0.226	0.017	0.243
	LTE Band 12	0.183	0.017	0.200
	LTE Band 13	0.228	0.017	0.245
	LTE Band 5 (Cell)	0.190	0.017	0.207
	LTE Band 4 (AWS)	0.707	0.017	<b>0.724</b>
	LTE Band 41	0.371	0.017	0.388

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 88 of 106	

**Table 12-10**  
**Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN (Body-Worn at 1.5 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body-Worn	GSM 850	0.182	0.017	0.270	0.469
	GSM 1900	0.296	0.017	0.270	0.583
	UMTS 850	0.226	0.017	0.270	0.513
	LTE Band 12	0.183	0.017	0.270	0.470
	LTE Band 13	0.228	0.017	0.270	0.515
	LTE Band 5 (Cell)	0.190	0.017	0.270	0.477
	LTE Band 4 (AWS)	0.707	0.017	0.270	<b>0.994</b>
	LTE Band 41	0.371	0.017	0.270	0.658
Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body-Worn	GSM 850	0.182	0.017	0.345	0.544
	GSM 1900	0.296	0.017	0.345	0.658
	UMTS 850	0.226	0.017	0.345	0.588
	LTE Band 12	0.183	0.017	0.345	0.545
	LTE Band 13	0.228	0.017	0.345	0.590
	LTE Band 5 (Cell)	0.190	0.017	0.345	0.552
	LTE Band 4 (AWS)	0.707	0.017	0.345	<b>1.069</b>
	LTE Band 41	0.371	0.017	0.345	0.733

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	1+2+3+4
Body-Worn	GSM 850	0.182	0.017	0.270	0.345	0.814
	GSM 1900	0.296	0.017	0.270	0.345	0.928
	UMTS 850	0.226	0.017	0.270	0.345	0.858
	LTE Band 12	0.183	0.017	0.270	0.345	0.815
	LTE Band 13	0.228	0.017	0.270	0.345	0.860
	LTE Band 5 (Cell)	0.190	0.017	0.270	0.345	0.822
	LTE Band 4 (AWS)	0.707	0.017	0.270	0.345	<b>1.339</b>
	LTE Band 41	0.371	0.017	0.270	0.345	1.003

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 89 of 106	

## 12.5 Hotspot SAR Simultaneous Transmission Analysis




**Table 12-11**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	0.354	0.387	0.263	0.741	0.617	1.004
	GPRS 1900	0.958	0.387	0.263	1.345	1.221	See Table Below
	UMTS 850	0.463	0.387	0.263	0.850	0.726	1.113
	LTE Band 12	0.229	0.387	0.263	0.616	0.492	0.879
	LTE Band 13	0.356	0.387	0.263	0.743	0.619	1.006
	LTE Band 5 (Cell)	0.415	0.387	0.263	0.802	0.678	1.065
	LTE Band 4 (AWS)	1.215	0.387	0.263	See Table Below	<b>1.478</b>	See Table Below
	LTE Band 41	1.074	0.387	0.263	1.461	1.337	See Table Below

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	0.348	0.222	0.263	0.833
	Front	0.284	0.387*	0.263*	0.934
	Top	-	0.387	0.263*	0.650
	Bottom	0.958	-	-	<b>0.958</b>
	Right	0.053	-	-	0.053
	Left	0.045	0.387*	0.263*	0.695

Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)	
		1	2	3	1+2	1+2+3
Hotspot SAR	Back	0.712	0.222	0.263	0.934	1.197
	Front	0.580	0.387*	0.263*	0.967	<b>1.230</b>
	Top	-	0.387	0.263*	0.387	0.650
	Bottom	1.215	-	-	1.215	1.215
	Right	0.094	-	-	0.094	0.094
	Left	0.099	0.387*	0.263*	0.486	0.749




Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	0.295	0.222	0.263	0.780
	Front	0.248	0.387*	0.263*	0.898
	Top	-	0.387	0.263*	0.650
	Bottom	1.074	-	-	<b>1.074</b>
	Right	0.100	0.387*	0.263*	0.750
	Left	0.100	0.387*	0.263*	0.750

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 90 of 106

**Table 12-12**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)	
		1	2	3	1+2	1+3
Hotspot SAR	GPRS 850	0.354	0.512	0.548	0.866	0.902
	GPRS 1900	0.958	0.512	0.548	1.470	1.506
	UMTS 850	0.463	0.512	0.548	0.975	1.011
	LTE Band 12	0.229	0.512	0.548	0.741	0.777
	LTE Band 13	0.356	0.512	0.548	0.868	0.904
	LTE Band 5 (Cell)	0.415	0.512	0.548	0.927	0.963
	LTE Band 4 (AWS)	1.215	0.512	0.548	See Table Below	See Table Below
	LTE Band 41	1.074	0.512	0.548	<b>1.586</b>	See Table Below




Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)	
		1	2	3	1+2	1+3
Hotspot SAR	Back	0.712	0.435	0.548	1.147	<b>1.260</b>
	Front	0.580	0.512*	0.548*	1.092	1.128
	Top	-	0.512*	0.548*	0.512	0.548
	Bottom	1.215	-	-	1.215	1.215
	Right	0.094	-	-	0.094	0.094
	Left	0.099	0.512	0.159	0.611	0.258
Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)	
		1	2	3	1+2	1+3
Hotspot SAR	Back	0.295	0.435	0.548	0.730	0.843
	Front	0.248	0.512*	0.548*	0.760	0.796
	Top	-	0.512*	0.548*	0.512	0.548
	Bottom	1.074	-	-	<b>1.074</b>	<b>1.074</b>
	Left	0.100	0.512	0.159	0.612	0.259

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 91 of 106	

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.354	0.710	1.064
	GPRS 1900	0.958	0.710	See Table Below
	UMTS 850	0.463	0.710	<b>1.173</b>
	LTE Band 12	0.229	0.710	0.939
	LTE Band 13	0.356	0.710	1.066
	LTE Band 5 (Cell)	0.415	0.710	1.125
	LTE Band 4 (AWS)	1.215	0.710	See Table Below
	LTE Band 41	1.074	0.710	See Table Below

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.348	0.710	<b>1.058</b>	Hotspot SAR	Back	0.712	0.710	<b>1.422</b>
	Front	0.284	0.710*	0.994		Front	0.580	0.710*	1.290
	Top	-	0.710*	0.710		Top	-	0.710*	0.710
	Bottom	0.958	-	0.958		Bottom	1.215	-	1.215
	Right	0.053	-	0.053		Right	0.094	-	0.094
	Left	0.045	0.540	0.585		Left	0.099	0.540	0.639

Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.295	0.710	1.005
	Front	0.248	0.710*	0.958
	Top	-	0.710*	0.710
	Bottom	1.074	-	<b>1.074</b>
	Left	0.100	0.540	0.640




FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 92 of 106



**Table 12-13**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN MIMO and 5 GHz WLAN MIMO**  
**(Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN MIMO at 16 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	1+2+3+4
Hotspot SAR	GPRS 850	0.354	0.387	0.263	0.265	1.269
	GPRS 1900	0.958	0.387	0.263	0.265	See Table Below
	UMTS 850	0.463	0.387	0.263	0.265	<b>1.378</b>
	LTE Band 12	0.229	0.387	0.263	0.265	1.144
	LTE Band 13	0.356	0.387	0.263	0.265	1.271
	LTE Band 5 (Cell)	0.415	0.387	0.263	0.265	1.330
	LTE Band 4 (AWS)	1.215	0.387	0.263	0.265	See Table Below
	LTE Band 41	1.074	0.387	0.263	0.265	See Table Below

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN MIMO at 16 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	1+2+3+4
Hotspot SAR	Back	0.348	0.222	0.263	0.265	1.098
	Front	0.284	0.387*	0.263*	0.265*	<b>1.199</b>
	Top	-	0.387	0.263*	0.265*	0.915
	Bottom	0.958	-	-	-	0.958
	Right	0.053	-	-	-	0.053
	Left	0.045	0.387*	0.263*	0.265*	0.960
Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN MIMO at 16 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	1+2+3+4
Hotspot SAR	Back	0.712	0.222	0.263	0.265	1.462
	Front	0.580	0.387*	0.263*	0.265*	<b>1.495</b>
	Top	-	0.387	0.263*	0.265*	0.915
	Bottom	1.215	-	-	-	1.215
	Right	0.094	-	-	-	0.094
	Left	0.099	0.387*	0.263*	0.265*	1.014
Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	5 GHz WLAN MIMO at 16 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	4	1+2+3+4
Hotspot SAR	Back	0.295	0.222	0.263	0.265	1.045
	Front	0.248	0.387*	0.263*	0.265*	<b>1.163</b>
	Top	-	0.387	0.263*	0.265*	0.915
	Bottom	1.074	-	-	-	1.074
	Right	-	-	-	-	-
	Left	0.100	0.387*	0.263*	0.265*	1.015

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 93 of 106	



**Table 12-14**  
**Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.354	0.069	0.423
	GPRS 1900	0.958	0.069	1.027
	UMTS 850	0.463	0.069	0.532
	LTE Band 12	0.229	0.069	0.298
	LTE Band 13	0.356	0.069	0.425
	LTE Band 5 (Cell)	0.415	0.069	0.484
	LTE Band 4 (AWS)	1.215	0.069	<b>1.284</b>
	LTE Band 41	1.074	0.069	1.143

**Table 12-15**  
**Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN (Hotspot at 1.0 cm)**




Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	GPRS 850	0.354	0.069	0.512	0.935
	GPRS 1900	0.958	0.069	0.512	<b>1.539</b>
	UMTS 850	0.463	0.069	0.512	1.044
	LTE Band 12	0.229	0.069	0.512	0.810
	LTE Band 13	0.356	0.069	0.512	0.937
	LTE Band 5 (Cell)	0.415	0.069	0.512	0.996
	LTE Band 4 (AWS)	1.215	0.069	0.512	See Table Below
	LTE Band 41	1.074	0.069	0.512	See Table Below

Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Hotspot SAR	Back	0.712	0.042	0.435	1.189	Hotspot SAR	Back	0.295	0.042	0.435	0.772
	Front	0.580	0.023	0.512*	1.115		Front	0.248	0.023	0.512*	0.783
	Top	-	0.069	0.512*	0.581		Top	-	0.069	0.512*	0.581
	Bottom	1.215	-	-	<b>1.215</b>		Bottom	1.074	-	-	<b>1.074</b>
	Right	0.094	-	-	0.094		Left	0.100	0.016	0.512	0.628
	Left	0.099	0.016	0.512	0.627						

FCC ID: A3LSMG986JPN	 <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 94 of 106

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	GPRS 850	0.354	0.069	0.548	0.971
	GPRS 1900	0.958	0.069	0.548	<b>1.575</b>
	UMTS 850	0.463	0.069	0.548	1.080
	LTE Band 12	0.229	0.069	0.548	0.846
	LTE Band 13	0.356	0.069	0.548	0.973
	LTE Band 5 (Cell)	0.415	0.069	0.548	1.032
	LTE Band 4 (AWS)	1.215	0.069	0.548	See Table Below
	LTE Band 41	1.074	0.069	0.548	See Table Below




Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	0.712	0.042	0.548	<b>1.302</b>
	Front	0.580	0.023	0.548*	1.151
	Top	-	0.069	0.548*	0.617
	Bottom	1.215	-	-	1.215
	Right	0.094	-	-	0.094
	Left	0.099	0.016	0.159	0.274
Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	0.295	0.042	0.548	0.885
	Front	0.248	0.023	0.548*	0.819
	Top	-	0.069	0.548*	0.617
	Bottom	1.074	-	-	<b>1.074</b>
	Right	0.100	0.016	0.159	0.275
	Left	0.100	0.016	0.159	0.275

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 95 of 106	

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	GPRS 850	0.354	0.069	0.710	1.133
	GPRS 1900	0.958	0.069	0.710	See Table Below
	UMTS 850	0.463	0.069	0.710	<b>1.242</b>
	LTE Band 12	0.229	0.069	0.710	1.008
	LTE Band 13	0.356	0.069	0.710	1.135
	LTE Band 5 (Cell)	0.415	0.069	0.710	1.194
	LTE Band 4 (AWS)	1.215	0.069	0.710	See Table Below
	LTE Band 41	1.074	0.069	0.710	See Table Below

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Hotspot SAR	Back	0.348	0.042	0.710	<b>1.100</b>	Hotspot SAR	Back	0.712	0.042	0.710	<b>1.464</b>
	Front	0.284	0.023	0.710*	1.017		Front	0.580	0.023	0.710*	1.313
	Top	-	0.069	0.710*	0.779		Top	-	0.069	0.710*	0.779
	Bottom	0.958	-	-	0.958		Bottom	1.215	-	-	1.215
	Right	0.053	-	-	0.053		Right	0.094	-	-	0.094
	Left	0.045	0.016	0.540	0.601		Left	0.099	0.016	0.540	0.655

Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	Bluetooth SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	0.295	0.042	0.710	1.047
	Front	0.248	0.023	0.710*	0.981
	Top	-	0.069	0.710*	0.779
	Bottom	1.074	-	-	<b>1.074</b>
	Left	0.100	0.016	0.540	0.656

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 96 of 106

## 12.6 Phablet Simultaneous Transmission Analysis

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required if wireless router 1g SAR (scaled to the maximum output power, including tolerance) < 1.2 W/kg. Therefore, no further analysis beyond the tables included in this section was required to determine that possible simultaneous transmission scenarios would not exceed the SAR limit.

For SAR summation, the highest reported SAR across all test distances was used as the most conservative evaluation for simultaneous transmission analysis for each device edge.



**Table 12-16**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Phablet)**

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)		Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)	
		1	2	3	1+2	1+3			1	2	3	1+2	1+3
Phablet SAR	Back	2.426	1.215	1.362	3.641	<b>3.788</b>	Phablet SAR	Back	2.170	1.215	1.362	3.385	<b>3.532</b>
	Front	2.193	1.215*	1.362*	3.408	3.555		Front	2.066	1.215*	1.362*	3.281	3.428
	Top	-	0.757	1.362*	0.757	1.362		Top	-	0.757	1.362*	0.757	1.362
	Bottom	3.129	-	-	3.129	3.129		Bottom	3.147	-	-	3.147	3.147
	Right	0.214	-	-	0.214	0.214		Right	0.408	-	-	0.408	0.408
	Left	0.218	1.131	0.283	1.349	0.501		Left	0.458	1.131	0.283	1.589	0.741

Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)	
		1	2	3	1+2	1+3
Phablet SAR	Back	2.440	1.215	1.362	3.655	<b>3.802</b>
	Front	2.136	1.215*	1.362*	3.351	3.498
	Top	-	0.757	1.362*	0.757	1.362
	Bottom	2.996	-	-	2.996	2.996
	Left	0.514	1.131	0.283	1.645	0.797




Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	$\Sigma$ SAR (W/kg)	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	$\Sigma$ SAR (W/kg)
		1	2	1+2			1	2	1+2
Phablet SAR	Back	2.426	1.133*	<b>3.559</b>	Phablet SAR	Back	2.170	1.133*	<b>3.303</b>
	Front	2.193	1.133*	3.326		Front	2.066	1.133*	3.199
	Top	-	0.878	0.878		Top	-	0.878	0.878
	Bottom	3.129	-	3.129		Bottom	3.147	-	3.147
	Right	0.214	-	0.214		Right	0.408	-	0.408
	Left	0.218	1.133	1.351		Left	0.458	1.133	1.591

Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	$\Sigma$ SAR (W/kg)
		1	2	1+2
Phablet SAR	Back	2.440	1.133*	<b>3.573</b>
	Front	2.136	1.133*	3.269
	Top	-	0.878	0.878
	Bottom	2.996	-	2.996
	Left	0.514	1.133	1.647

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of element	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 97 of 106

## 12.7 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 98 of 106

## 13 SAR MEASUREMENT VARIABILITY

### 13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

**Table 13-1**  
**Body SAR Measurement Variability Results**



BODY VARIABILITY RESULTS												
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)
1750	1732.50	20175	LTE Band 4 (AWS), 20 MHz Bandwidth	QPSK, 50 RB, 25 RB Offset	bottom	10 mm	1.080	1.030	1.05	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT						Body						
Spatial Peak						1.6 W/kg (mW/g)						
Uncontrolled Exposure/General Population						averaged over 1 gram						

**Table 13-2**  
**Phablet SAR Measurement Variability Results**

PHABLET VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	# of Time Slots	Side	Spacing	Measured SAR (10g)	1st Repeated SAR (10g)	Ratio	2nd Repeated SAR (10g)	Ratio	3rd Repeated SAR (10g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)			
1900	1880.00	661	GSM 1900	GPRS	4	bottom	0 mm	2.590	2.540	1.02	N/A	N/A	N/A	N/A
1750	1732.50	20175	LTE Band 4 (AWS), 20 MHz Bandwidth	QPSK, 50 RB, 25 RB Offset	N/A	bottom	0 mm	2.830	2.790	1.01	N/A	N/A	N/A	N/A
2600	PCC: 2593.00	40620	LTE Band 41 ULCA, 20 MHz Bandwidth	PCC: QPSK, 1 RB, 0 RB Offset	N/A	bottom	0 mm	2.670	2.630	1.02	N/A	N/A	N/A	N/A
	SCC: 2573.20	40422		SCC: QPSK, 1 RB, 99 RB Offset										
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Phablet							
Spatial Peak							4.0 W/kg (mW/g)							
Uncontrolled Exposure/General Population							averaged over 10 grams							

### 13.2 Measurement Uncertainty

The measured SAR was  $< 1.5$  W/kg for 1g and  $< 3.75$  W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 99 of 106

## 14 ADDITIONAL TESTING PER FCC GUIDANCE

### 14.1 Tuner Testing



Per April 2019 TCB Workshop Notes, the following test procedures were followed to demonstrate that the SAR results in Section 11 represented the appropriate SAR test conditions. For bands with dynamic tuning implemented, SAR was measured according to the required FCC SAR test procedures with the dynamic tuner active to allow the device to automatically tune to the antenna state for the respective RF exposure test configurations. Additional single point SAR time-sweep measurements were evaluated for other tuner states to determine that the other tuner configurations would result in equivalent or lower SAR values. The additional tuner hardware has no influence on the antenna characteristics, other than impedance matching.

To evaluate all the tuner states, the 120 tuner states were divided among the aggregate band, mode and exposure combinations. Single point time-sweep measurements were performed at the peak SAR location determined by the zoom scan of the configuration with the highest reported SAR for each combination. The tuner state was able to be established remotely so that the device was not moved for the entire series of single point SAR for the tuner states in each combination. The SAR probe remained stationary at the same position throughout the entire series of single point measurements for each combination. When the single point SAR or 1g SAR was > 1.2 W/kg for a particular band/mode/exposure condition, point SAR measurements were made for all 120 states.

The operational description contains more information about the design and implementation of the dynamic antenna tuning.

**Table 14-1**  
**Supplemental Head SAR Data**



Supplemental Head SAR Data									
UMTS B5		LTE B12		LTE B13		LTE B5		LTE B4	
RMC		QPSK, 10 MHz Bandwidth, 1 RB, 0 RB Offset		QPSK, 10 MHz Bandwidth, 1 RB, 0 RB Offset		QPSK, 10 MHz Bandwidth, 1 RB, 0 RB Offset		QPSK, 20 MHz Bandwidth, 1 RB, 50 RB Offset	
Test Position	Right Cheek	Test Position	Left Cheek	Test Position	Right Cheek	Test Position	Right Cheek	Test Position	Left Cheek
Frequency (MHz)	836.6	Frequency (MHz)	707.5	Frequency (MHz)	782.0	Frequency (MHz)	836.5	Frequency (MHz)	1732.5
Channel	4183	Channel	23095	Channel	23230	Channel	20525	Channel	20175
Measured 1g SAR (W/kg)	0.156	Measured 1g SAR (W/kg)	0.096	Measured 1g SAR (W/kg)	0.144	Measured 1g SAR (W/kg)	0.154	Measured 1g SAR (W/kg)	0.135
Average Value of Time Sweep (W/kg)		Average Value of Time Sweep (W/kg)		Average Value of Time Sweep (W/kg)		Average Value of Time Sweep (W/kg)		Average Value of Time Sweep (W/kg)	
Auto-tune (State 104)	0.199	Auto-tune (State 7)	0.113	Auto-tune (State 0)	0.184	Auto-tune (State 0)	0.185	Auto-tune (State 24)	0.200
Default (State 0)	0.203	Default (State 0)	0.048	Default (State 0)	0.187	Default (State 0)	0.187	Default (State 0)	0.102
State 0	0.203	State 0	0.048	State 0	0.187	State 0	0.187	State 0	0.102
State 1	0.183	State 5	0.089	State 13	0.174	State 2	0.159	State 18	0.128
State 17	0.197	State 7	0.113	State 18	0.185	State 7	0.103	State 22	0.180
State 32	0.118	State 9	0.075	State 23	0.086	State 15	0.174	State 24	0.204
State 41	0.101	State 21	0.012	State 25	0.036	State 26	0.173	State 28	0.080
State 52	0.193	State 34	0.104	State 30	0.123	State 35	0.058	State 40	0.010
State 63	0.057	State 47	0.086	State 44	0.070	State 39	0.120	State 50	0.008
State 72	0.105	State 59	0.018	State 56	0.186	State 48	0.032	State 58	0.118
State 87	0.105	State 68	0.040	State 65	0.165	State 55	0.175	State 76	0.044
State 104	0.201	State 70	0.030	State 78	0.116	State 61	0.096	State 79	0.007
State 105	0.191	State 81	0.081	State 95	0.143	State 67	0.153	State 84	0.007
State 113	0.193	State 90	0.007	State 103	0.019	State 71	0.122	State 92	0.010
State 116	0.197	State 99	0.006	State 112	0.182	State 74	0.057	State 101	0.032
State 118	0.130	State 107	0.053	State 117	0.158	State 80	0.084	State 115	0.007

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 100 of 106



**Table 14-2**  
**Supplemental Body SAR Data**

Supplemental Body SAR Data									
UMTS B5		LTE B12		LTE B13		LTE B5		LTE B4	
RMC		QPSK, 10 MHz Bandwidth, 1 RB, 0 RB Offset		QPSK, 10 MHz Bandwidth, 1 RB, 0 RB Offset		QPSK, 10 MHz Bandwidth, 1 RB 0 RB offset		QPSK, 20 MHz Bandwidth, 1 RB, 50 RB Offset	
Test Position	Back	Test Position	back	Test Position	back	Test Position	back	Test Position	Bottom
Spacing	10 mm	Spacing	10 mm	Spacing	10 mm	Spacing	10mm	Spacing	10 mm
Frequency (MHz)	836.6	Frequency (MHz)	707.5	Frequency (MHz)	782.0	Frequency (MHz)	836.5	Frequency (MHz)	1732.5
Channel	4183	Channel	23095	Channel	23230	Channel	20525	Channel	20175
Measured 1g SAR (W/kg)	0.395	Measured 1g SAR (W/kg)	0.200	Measured 1g SAR (W/kg)	0.298	Measured 1g SAR (W/kg)	0.364	Measured 1g SAR (W/kg)	1.060
Average Value of Time Sweep (W/kg)		Average Value of Time Sweep (W/kg)		Average Value of Time Sweep (W/kg)		Average Value of Time Sweep (W/kg)		Average Value of Time Sweep (W/kg)	
Auto-tune (State 104)	0.628	Auto-tune (State 7)	0.348	Auto-tune (State 0)	0.480	Auto-tune (State 0)	0.621	Auto-tune (State 62)	1.802
Default (State 0)	0.612	Default (State 0)	0.156	Default (State 0)	0.471	Default (State 0)	0.620	Default (State 0)	0.939
State 0	0.612	State 0	0.156	State 0	0.471	State 0	0.620	State 0	0.939
State 3	0.502	State 7	0.345	State 4	0.345	State 6	0.437	State 1	0.970
State 8	0.236	State 61	0.020	State 18	0.444	State 14	0.563	State 2	0.873
State 11	0.091	State 65	0.114	State 62	0.176	State 22	0.320	State 3	0.881
State 19	0.467	State 69	0.128	State 70	0.368	State 27	0.442	State 4	0.993
State 24	0.133	State 74	0.014	State 75	0.123	State 31	0.476	State 5	0.996
State 29	0.133	State 77	0.002	State 82	0.210	State 36	0.191	State 6	1.021
State 33	0.276	State 83	0.309	State 86	0.103	State 42	0.366	State 7	1.040
State 43	0.283	State 87	0.158	State 91	0.406	State 45	0.118	State 8	1.073
State 46	0.165	State 90	0.030	State 98	0.254	State 54	0.574	State 9	1.113
State 53	0.593	State 93	0.150	State 102	0.080	State 60	0.408	State 10	1.147
State 57	0.533	State 97	0.086	State 109	0.417	State 73	0.275	State 11	1.160
State 104	0.613	State 100	0.013	State 113	0.417	State 80	0.348	State 12	1.164
								State 13	0.956
								State 14	1.092
								State 15	1.075
								State 16	1.095
								State 17	1.139
								State 18	1.150
								State 19	1.258
								State 20	1.362
								State 21	1.507
								State 22	1.965
								State 23	1.782
								State 24	1.683
								State 25	1.254
								State 26	0.800
								State 27	0.823
								State 28	0.828
								State 29	0.827
								State 30	0.943
								State 31	0.851
								State 32	0.876
								State 33	0.894
								State 34	0.921
								State 35	0.947
								State 36	0.969
								State 37	0.985
								State 38	0.974
								State 39	0.129
								State 40	0.153
								State 41	0.154
								State 42	0.154
								State 43	0.155
								State 44	0.163
								State 45	0.168
								State 46	0.174
								State 47	0.177
								State 48	0.186
								State 49	0.189
								State 50	0.190
								State 51	0.184
								State 52	0.929
								State 53	1.034
								State 54	1.061
								State 55	1.082
								State 56	1.125
								State 57	1.143
								State 58	1.272
								State 59	1.381
								State 60	1.531
								State 61	1.735
								State 62	1.798
								State 63	1.701
								State 64	1.220
								State 65	0.141
								State 66	0.189
								State 67	0.194
								State 68	0.199
								State 69	0.211
								State 70	0.226
								State 71	0.265
								State 72	0.311
								State 73	0.374
								State 74	0.495
								State 75	0.580
								State 76	0.585
								State 77	0.367
								State 78	0.112
								State 79	0.130
								State 80	0.129
								State 81	0.129
								State 82	0.131
								State 83	0.138
								State 84	0.143
								State 85	0.148
								State 86	0.152
								State 87	0.159
								State 88	0.162
								State 89	0.163
								State 90	0.160
								State 91	0.120
								State 92	0.158
								State 93	0.162
								State 94	0.165
								State 95	0.175
								State 96	0.188
								State 97	0.221
								State 98	0.257
								State 99	0.316
								State 100	0.423
								State 101	0.503
								State 102	0.519
								State 103	0.325
								State 104	1.010
								State 105	1.017
								State 106	0.807
								State 107	0.129
								State 108	0.690
								State 109	0.138
								State 110	0.112
								State 111	0.119
								State 112	0.996
								State 113	1.011
								State 114	0.809
								State 115	0.130
								State 116	0.884
								State 117	0.138
								State 118	0.112
								State 119	0.119



FCC ID: A3LSMG986JPN				SAR EVALUATION REPORT				Approved by:	
Document S/N:		Test Dates:		DUT Type:				Quality Manager	
1M2001240012-01-R1.A3L		02/10/20 - 03/17/20		Portable Handset				Page 101 of 106	

# 15 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(BkHx-2 GHz) Spectrum Analyzer	N/A	N/A	N/A	3021400187
Agilent	E4432B	ESG-D Series Signal Generator	7/14/2019	Annual	7/14/2020	US40053896
Agilent	N9020A	MXA Signal Analyzer	4/20/2019	Annual	4/20/2020	US46470561
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46170464
Agilent	E5515C	Wireless Communications Test Set	6/26/2019	Annual	6/26/2020	MY50267125
Agilent	E5515C	Wireless Communications Test Set	5/22/2018	Biennial	5/22/2020	GB43193563
Agilent	N5182A	MWG Vector Signal Generator	6/27/2019	Annual	6/27/2020	US46240505
Agilent	8753ES	S-Parameter Network Analyzer	12/11/2019	Annual	12/11/2020	US39170122
Agilent	N5182A	MWG Vector Signal Generator	7/10/2019	Annual	7/10/2020	MY47420600
Agilent	E4438C	ESG Vector Signal Generator	3/8/2019	Biennial	3/8/2021	MY42092385
Agilent	E4438C	ESG Vector Signal Generator	3/11/2019	Biennial	3/11/2021	MY45090700
Agilent	8753ES	S-Parameter Network Analyzer	1/16/2020	Annual	1/16/2021	US39170118
Agilent	8753ES	S-Parameter Network Analyzer	8/26/2019	Annual	8/26/2020	MY40000670
Agilent	8753ES	S-Parameter Vector Network Analyzer	9/19/2019	Annual	9/19/2020	MY40003841
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433972
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433974
Anritsu	ML2495A	Power Meter	12/17/2019	Annual	12/17/2020	941001
Anritsu	MA24106A	USB Power Sensor	5/6/2019	Annual	5/6/2020	1231538
Anritsu	MA24106A	USB Power Sensor	5/22/2019	Annual	5/22/2020	1231535
Anritsu	MA24106A	USB Power Sensor	6/21/2019	Annual	6/21/2020	1244515
Anritsu	ML2496A	Power Meter	12/17/2019	Annual	12/17/2020	1138001
Anritsu	MA2411B	Pulse Power Sensor	6/11/2019	Annual	6/11/2020	1207364
Anritsu	MA2411B	Pulse Power Sensor	12/4/2019	Annual	12/4/2020	1126066
Anritsu	MT8820C	Radio Communication Analyzer	7/25/2019	Annual	7/25/2020	6201240328
Anritsu	MT8820C	Radio Communication Analyzer	3/29/2019	Annual	3/29/2020	6201300731
Anritsu	MT8821C	Radio Communication Analyzer	8/18/2019	Annual	8/18/2020	6201444418
Anritsu	MT8821C	Radio Communication Analyzer	3/18/2019	Annual	3/18/2020	6201444419
Anritsu	MT8862A	Wireless Connectivity Test Set	8/8/2019	Annual	8/8/2020	6263782395
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
Control Company	4352	Ultra Long Stem Thermometer	8/2/2018	Biennial	8/2/2020	181292054
Control Company	4352	Ultra Long Stem Thermometer	8/2/2018	Biennial	8/2/2020	181292061
Control Company	4040	Therm./ Clock/ Humidity Monitor	10/9/2018	Biennial	10/9/2020	181647811
Control Company	4040	Therm./ Clock/ Humidity Monitor	10/9/2018	Biennial	10/9/2020	181647802
Control Company	4040	Therm./ Clock/ Humidity Monitor	10/9/2018	Biennial	10/9/2020	181647812
Control Company	4352	Long Stem Thermometer	6/26/2019	Biennial	6/26/2021	192282745
Control Company	4352	Long Stem Thermometer	6/26/2019	Biennial	6/26/2021	192282753
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	N6705B	DC Power Analyzer	4/27/2019	Biennial	4/27/2021	MY53004059
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SUP-2400	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-250+	Low Pass Filter DC to 2500 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mitutoyo	CD-6°CSX	Digital Caliper	4/18/2018	Biennial	4/18/2020	13264165
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-53W2	Attenuator (3dB)	CBT	N/A	CBT	120
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2208-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	NC-100	Torque Wrench	5/23/2018	Biennial	5/23/2020	N/A
Pasternack	NC-100	Torque Wrench	11/7/2017	Biennial	11/7/2019	N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	8/26/2019	Annual	8/26/2020	100976
Rohde & Schwarz	CMW500	Radio Communication Tester	6/26/2019	Annual	6/26/2020	112347
Rohde & Schwarz	CMU200	Base Station Simulator	6/3/2019	Annual	6/3/2020	109892
SPEAG	EX30V4	SAR Probe	7/16/2019	Annual	7/16/2020	7410
SPEAG	EX30V4	SAR Probe	12/11/2019	Annual	12/11/2020	7570
SPEAG	EX30V4	SAR Probe	1/21/2020	Annual	1/21/2021	3589
SPEAG	EX30V4	SAR Probe	5/16/2019	Annual	5/16/2020	7406
SPEAG	EX30V4	SAR Probe	9/19/2019	Annual	9/19/2020	7551
SPEAG	EX30V4	SAR Probe	7/15/2019	Annual	7/15/2020	7547
SPEAG	EX30V4	SAR Probe	6/19/2019	Annual	6/19/2020	7409
SPEAG	EX30V4	SAR Probe	4/24/2019	Annual	4/24/2020	7357
SPEAG	EX30V4	SAR Probe	12/11/2019	Annual	12/11/2020	7571
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/11/2019	Annual	7/11/2020	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	12/18/2019	Annual	12/18/2020	859
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/13/2020	Annual	1/13/2021	1358
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/8/2019	Annual	5/8/2020	728
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/17/2019	Annual	9/17/2020	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/11/2019	Annual	7/11/2020	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/20/2019	Annual	6/20/2020	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/18/2019	Annual	4/18/2020	1407
SPEAG	DAE4	Data Acquisition Electronics	12/5/2019	Annual	12/5/2020	1533
SPEAG	D750V3	750 MHz SAR Dipole	1/15/2018	Triennial	1/15/2021	1003
SPEAG	D750V3	750 MHz Dipole	3/18/2019	Annual	3/18/2020	1054
SPEAG	D835V2	835 MHz SAR Dipole	10/19/2018	Biennial	10/19/2020	4033
SPEAG	D1750V2	1750 MHz SAR Dipole	5/23/2018	Biennial	5/23/2020	1008
SPEAG	D1900V2	1900 MHz SAR Dipole	10/23/2018	Biennial	10/23/2020	54080
SPEAG	D2450V2	2450 MHz SAR Dipole	9/11/2017	Triennial	9/11/2020	797
SPEAG	D2600V2	2600 MHz SAR Dipole	6/14/2019	Annual	6/14/2020	1064
SPEAG	D5GHzV2	5 GHz SAR Dipole	1/16/2018	Triennial	1/16/2021	1057
SPEAG	D750V3	750 MHz SAR Dipole	10/19/2018	Biennial	10/19/2020	1161
SPEAG	D835V2	835 MHz SAR Dipole	1/13/2020	Annual	1/13/2021	40132
SPEAG	D835V2	835 MHz SAR Dipole	3/13/2019	Annual	3/13/2020	46047
SPEAG	D1750V2	1750 MHz SAR Dipole	5/15/2019	Annual	5/15/2020	1448
SPEAG	D1750V2	1750 MHz SAR Dipole	10/22/2018	Biennial	10/22/2020	1150
SPEAG	D1900V2	1900 MHz SAR Dipole	2/21/2019	Biennial	2/21/2021	50148
SPEAG	D2450V2	2450 MHz SAR Dipole	8/14/2019	Annual	8/14/2020	719
SPEAG	D2600V2	2600 MHz SAR Dipole	4/11/2018	Biennial	4/11/2020	1004
SPEAG	D5GHzV2	5 GHz SAR Dipole	8/10/2018	Biennial	8/10/2020	1237
SPEAG	D1900V2	1900 MHz SAR Dipole	10/23/2018	Biennial	10/23/2020	5149
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/7/2019	Annual	5/7/2020	1070



Note:

1. CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.
2. Each equipment item is used solely within its respective calibration period

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 102 of 106

## 16 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> 1gm	c <sub>i</sub> 10 gms	1gm u <sub>i</sub> (± %)	10gms u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
<b>Test Sample Related</b>								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
<b>Phantom &amp; Tissue Parameters</b>								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
<b>Combined Standard Uncertainty (k=1)</b>	RSS					11.5	11.3	60
<b>Expanded Uncertainty</b> (95% CONFIDENCE LEVEL)	k=2					23.0	22.6	




FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset		Page 103 of 106

## 17 CONCLUSION

### 17.1 Measurement Conclusion




The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2001240012-01-R1.A3L	Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset		Page 104 of 106

## 18 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>	 <b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	Page 105 of 106

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>		<b>SAR EVALUATION REPORT</b> 		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2001240012-01-R1.A3L	<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset		Page 106 of 106	

## APPENDIX A: SAR TEST DATA

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0441M**

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.908 \text{ S/m}$ ;  $\epsilon_r = 40.337$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 02/12/2020; Ambient Temp: 22.6°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7410; ConvF(9.88, 9.88, 9.88) @ 836.6 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: GSM 850, Right Head, Cheek, Mid.ch**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.07 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.162 W/kg

**SAR(1 g) = 0.129 W/kg**

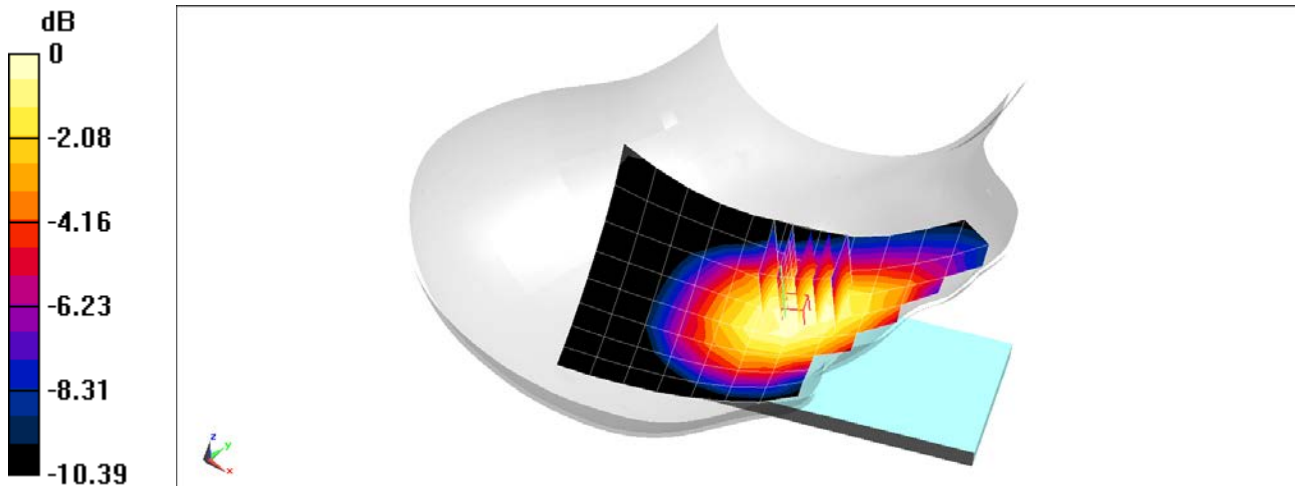

0 dB = 0.150 W/kg = -8.24 dBW/kg



# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0441M**

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 38.096$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 02/11/2020; Ambient Temp: 19.6°C; Tissue Temp: 19.8°C

Probe: EX3DV4 - SN7410; ConvF(8.11, 8.11, 8.11) @ 1880 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: GSM 1900, Left Head, Cheek, Mid.ch**


**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.308 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0640 W/kg

**SAR(1 g) = 0.042 W/kg**

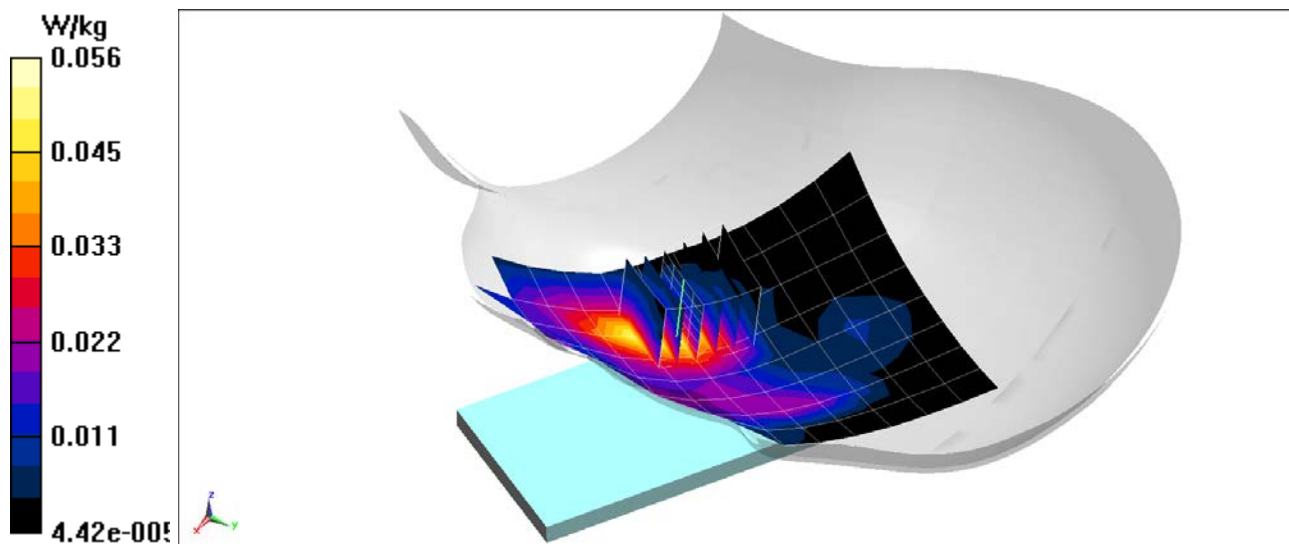

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0441M**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.908 \text{ S/m}$ ;  $\epsilon_r = 40.337$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 02/12/2020; Ambient Temp: 22.6°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7410; ConvF(9.88, 9.88, 9.88) @ 836.6 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 850, Right Head, Cheek, Mid.ch**



**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.27 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.203 W/kg

**SAR(1 g) = 0.156 W/kg**

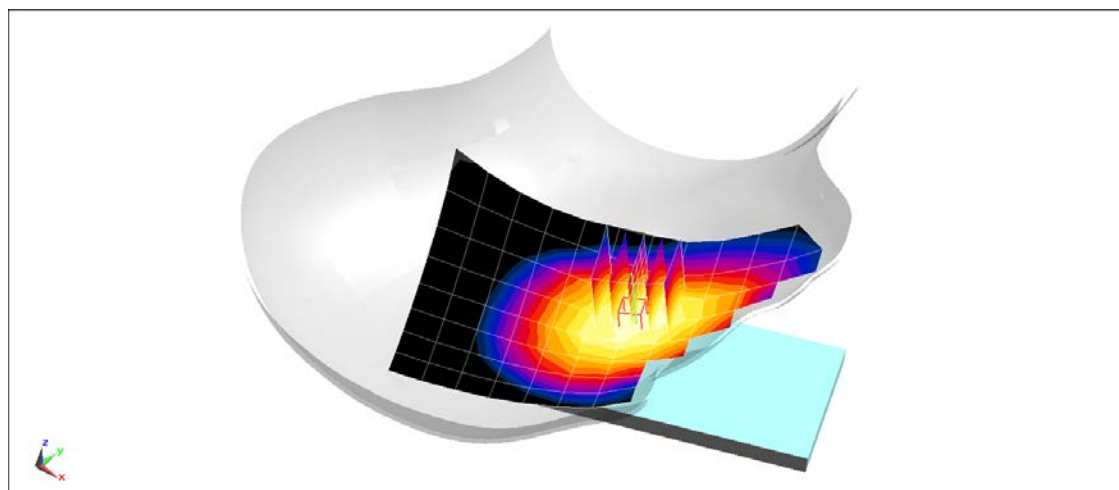

0 dB = 0.184 W/kg = -7.35 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0378M**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 707.5$  MHz;  $\sigma = 0.863$  S/m;  $\epsilon_r = 40.74$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Test Date: 02/12/2020; Ambient Temp: 22.6°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7410; ConvF(9.95, 9.95, 9.95) @ 707.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Left Head, Cheek, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.81 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.114 W/kg

**SAR(1 g) = 0.096 W/kg**

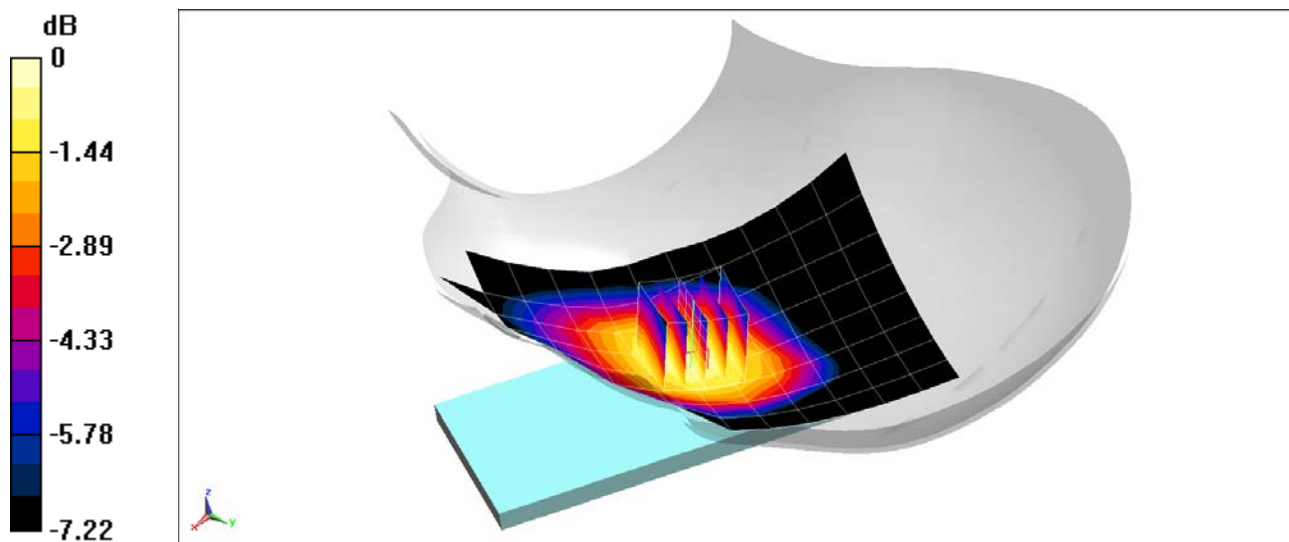

0 dB = 0.109 W/kg = -9.63 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0378M**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 40.573$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 02/24/2020; Ambient Temp: 21.6°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7410; ConvF(9.95, 9.95, 9.95) @ 782 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Right Head, Cheek, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.13 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.173 W/kg

**SAR(1 g) = 0.144 W/kg**

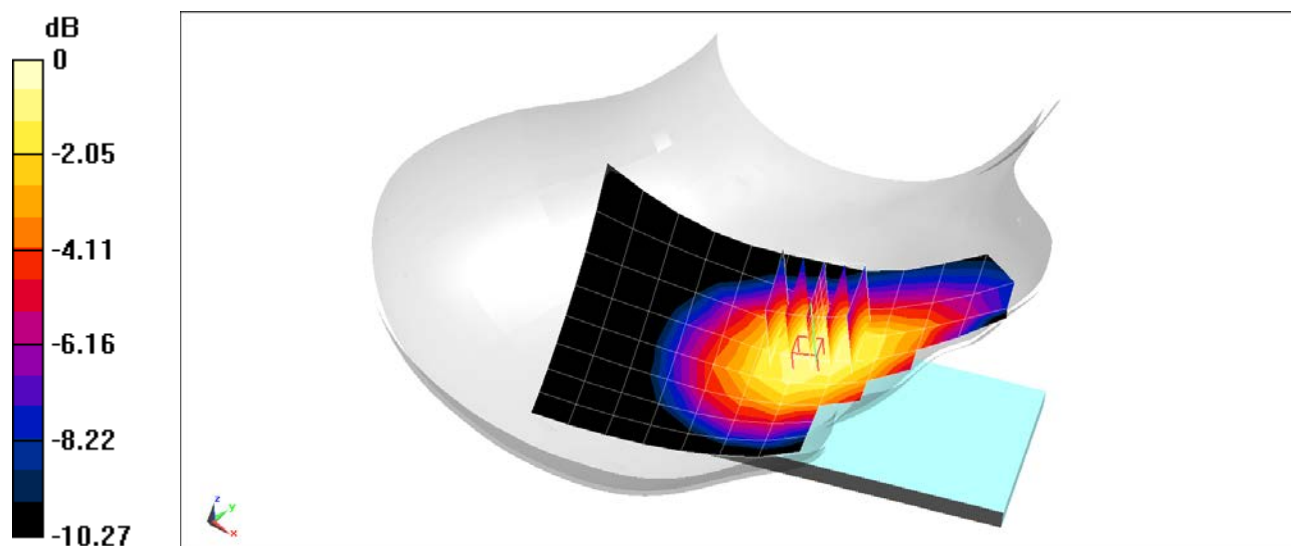

0 dB = 0.165 W/kg = -7.83 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0378M**

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$ ;  $\sigma = 0.908 \text{ S/m}$ ;  $\epsilon_r = 40.337$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 02/12/2020; Ambient Temp: 22.6°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7410; ConvF(9.88, 9.88, 9.88) @ 836.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 5 (Cell.), Right Head, Cheek, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.61 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.195 W/kg

**SAR(1 g) = 0.154 W/kg**

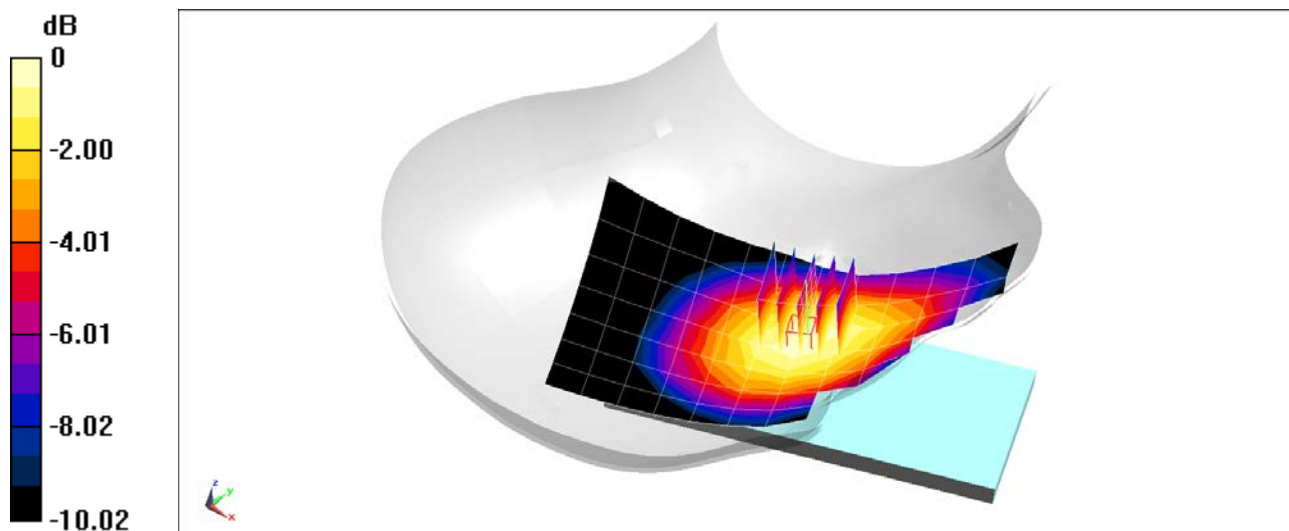

0 dB = 0.182 W/kg = -7.40 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0378M**

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used (interpolated):

$f = 1732.5$  MHz;  $\sigma = 1.35$  S/m;  $\epsilon_r = 39.923$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Test Date: 02/17/2020; Ambient Temp: 22.7°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7410; ConvF(8.46, 8.46, 8.46) @ 1732.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 4 (AWS), Left Head, Cheek, Mid.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.60 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.207 W/kg

**SAR(1 g) = 0.135 W/kg**

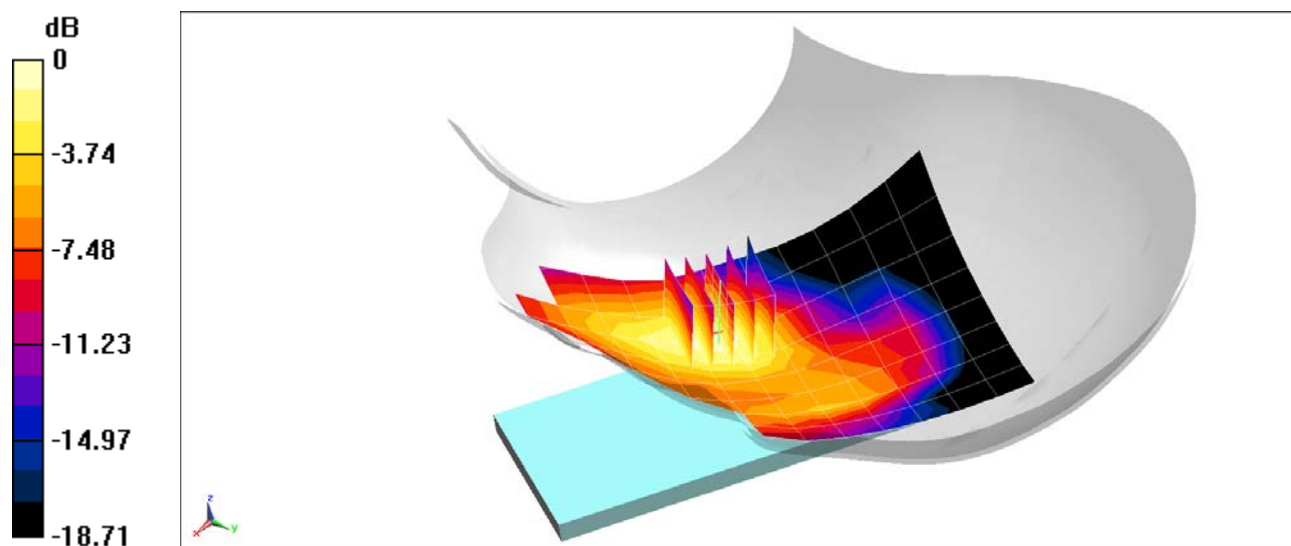

0 dB = 0.183 W/kg = -7.38 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 1157M**

Communication System: UID 0, LTE Band 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2593 \text{ MHz}$ ;  $\sigma = 1.926 \text{ S/m}$ ;  $\epsilon_r = 37.335$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 03/17/2020; Ambient Temp: 22.8°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2593 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41 ULCA, Left Head, Cheek,**  
**PCC: 20 MHz Bandwidth, Ch. 40620, QPSK, 1 RB, 0 RB Offset,**  
**SCC: 20 MHz Bandwidth, Ch. 40422, QPSK, 1 RB, 99 RB Offset**


**Area Scan (11x17x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.325 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.143 W/kg

**SAR(1 g) = 0.077 W/kg**

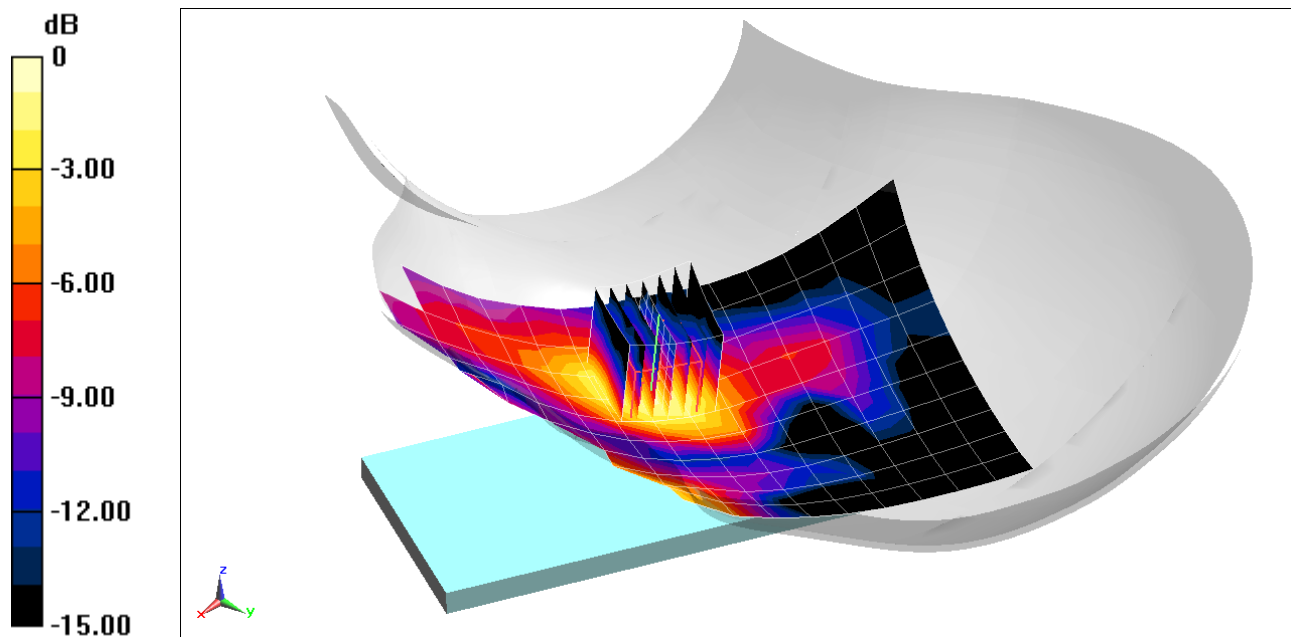

0 dB = 0.119 W/kg = -9.24 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0899M**

Communication System: UID 0, \_IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$ ;  $\sigma = 1.853 \text{ S/m}$ ;  $\epsilon_r = 37.946$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 02/19/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7570; ConvF(7.52, 7.52, 7.52) @ 2462 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11b Ant 1, 22 MHz Bandwidth,  
Right Head, Tilt, Ch 11, 1 Mbps**


**Area Scan (11x18x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.46 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.58 W/kg

**SAR(1 g) = 0.560 W/kg**

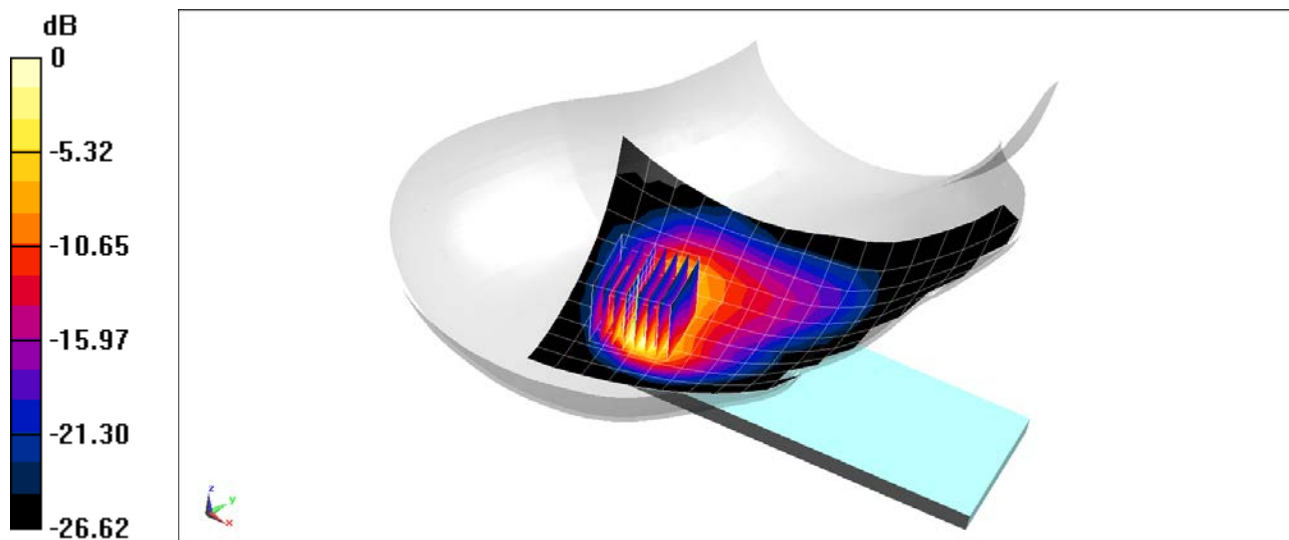

0 dB = 1.17 W/kg = 0.68 dBW/kg



# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0936M**

Communication System: UID 0, IEEE 802.11n; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5270$  MHz;  $\sigma = 4.736$  S/m;  $\epsilon_r = 36.762$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Test Date: 02/14/2020; Ambient Temp: 21.4°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7406; ConvF(5.54, 5.54, 5.54) @ 5270 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Right 20; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11n Ant 1, U-NII-2A, 40 MHz Bandwidth,  
Right Head, Tilt, Ch 54, 13.5 Mbps**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 2.524 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.222 W/kg**

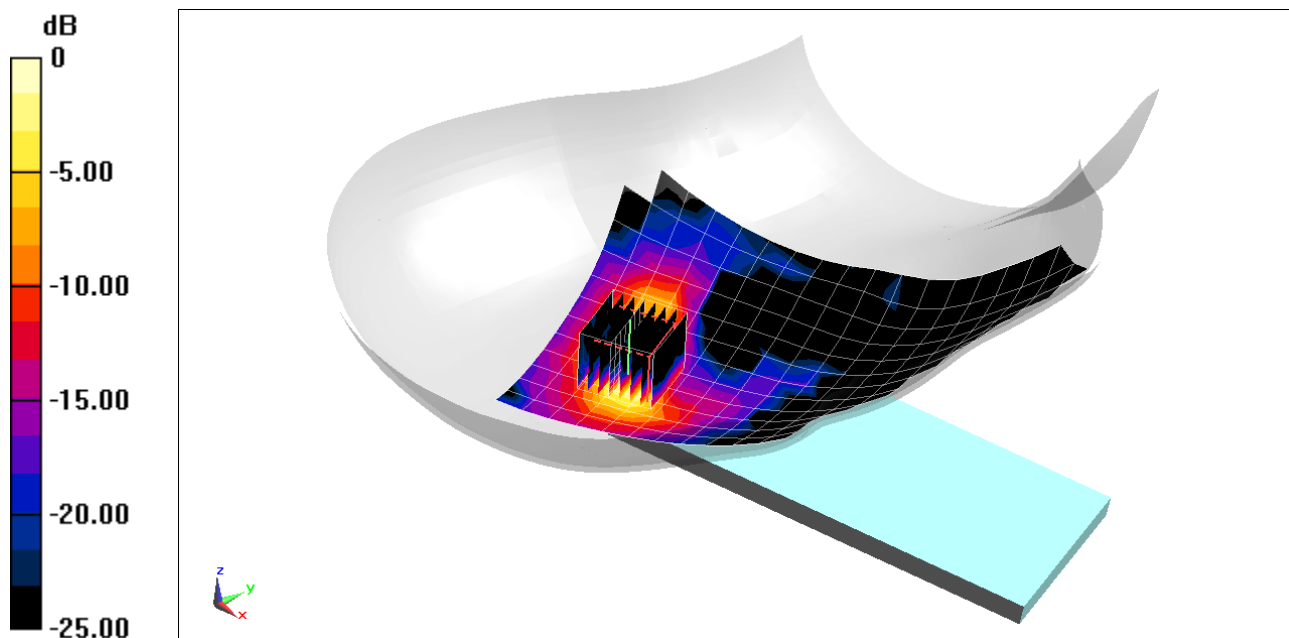

0 dB = 0.614 W/kg = -2.12 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0936M**

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.297

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$ ;  $\sigma = 1.85 \text{ S/m}$ ;  $\epsilon_r = 38.742$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 02/24/2020; Ambient Temp: 21.0°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7570; ConvF(7.52, 7.52, 7.52) @ 2441 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Bluetooth, Right Head, Tilt, Ch 39, 1 Mbps**


**Area Scan (11x17x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.81 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.670 W/kg

**SAR(1 g) = 0.253 W/kg**

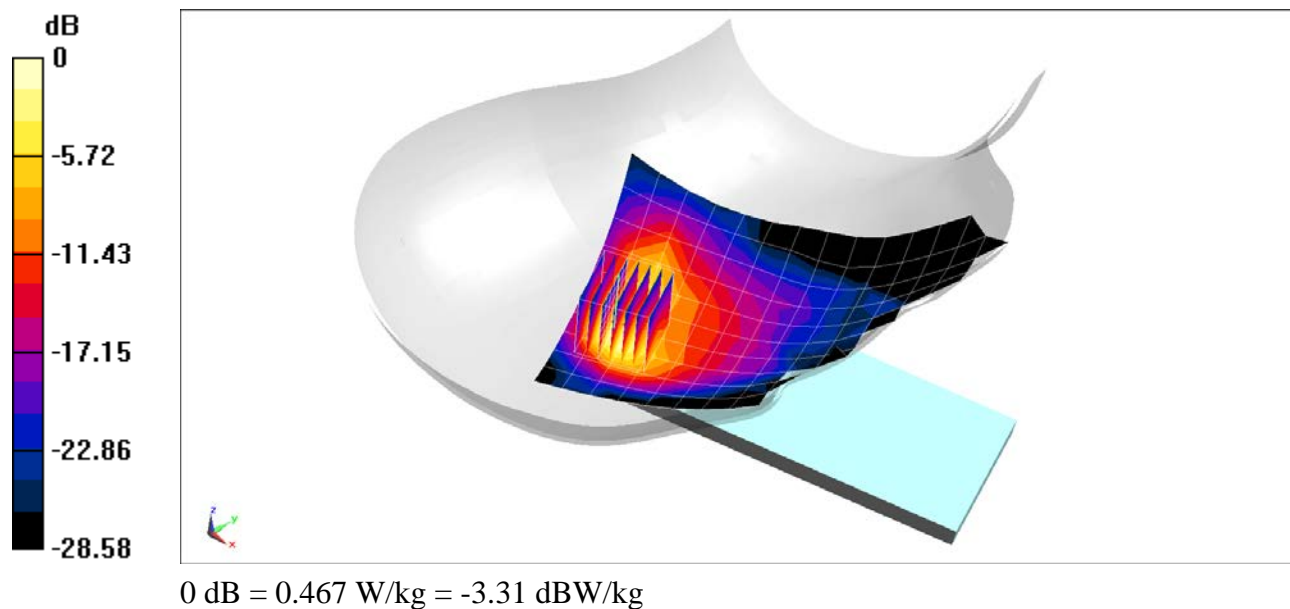

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0588M**

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.942 \text{ S/m}$ ;  $\epsilon_r = 54.839$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/13/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7406; ConvF(9.78, 9.78, 9.78) @ 836.6 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Right 20; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: GSM 850, Body SAR, Back side, Mid.ch**



**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.46 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.231 W/kg

**SAR(1 g) = 0.164 W/kg**

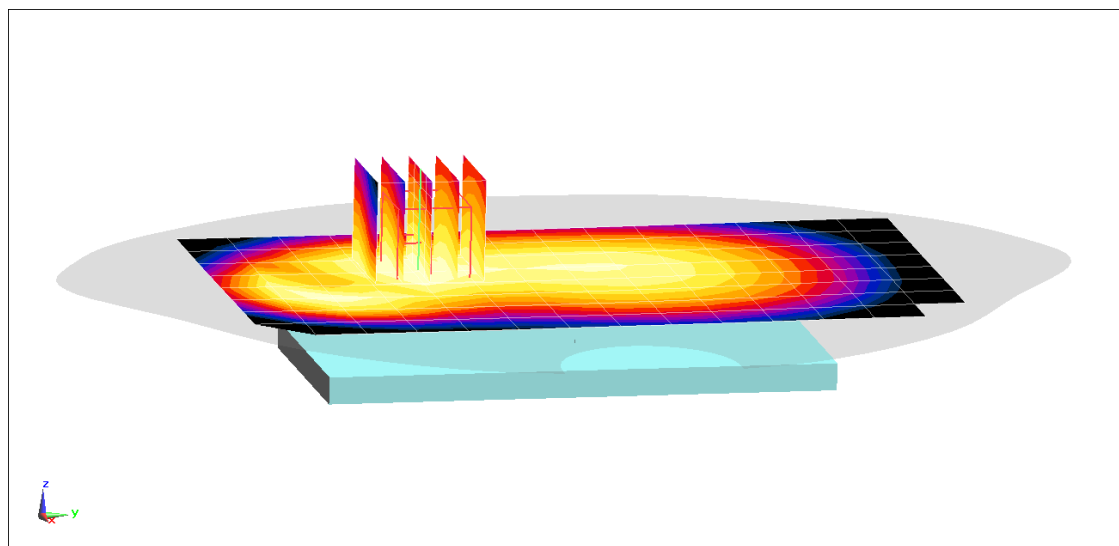

0 dB = 0.203 W/kg = -6.93 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0588M**

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.942 \text{ S/m}$ ;  $\epsilon_r = 54.839$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/13/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7406; ConvF(9.78, 9.78, 9.78) @ 836.6 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Right 20; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: GPRS 850, Body SAR, Back side, Mid.ch, 3 Tx Slots**



**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 18.21 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.531 W/kg

**SAR(1 g) = 0.301 W/kg**

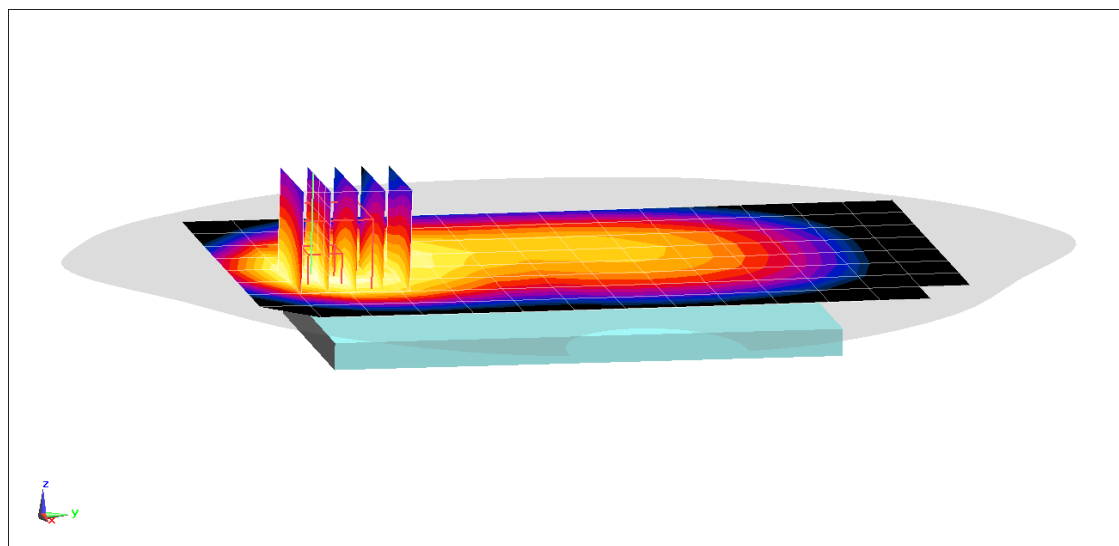

0 dB = 0.428 W/kg = -3.69 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0381M**

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.534 \text{ S/m}$ ;  $\epsilon_r = 52.297$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/19/2020; Ambient Temp: 23.5°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7551; ConvF(7.69, 7.69, 7.69) @ 1880 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: GSM 1900, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.71 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.433 W/kg

**SAR(1 g) = 0.258 W/kg**

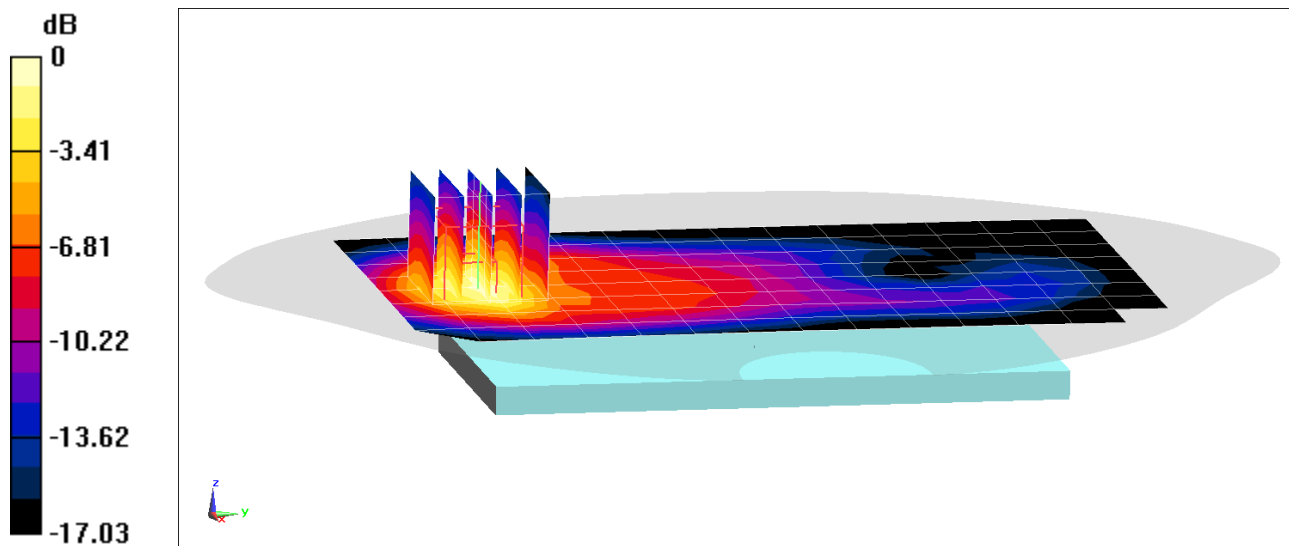

0 dB = 0.373 W/kg = -4.28 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0588M**

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.076

Medium: 1900 Body Medium parameters used:

$f = 1910$  MHz;  $\sigma = 1.571$  S/m;  $\epsilon_r = 53.019$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/09/2020; Ambient Temp: 22.7°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1909.8 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: GPRS 1900, Body SAR, Bottom Edge, High.ch, 4 Tx Slots**


**Area Scan (10x7x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.85 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.782 W/kg**

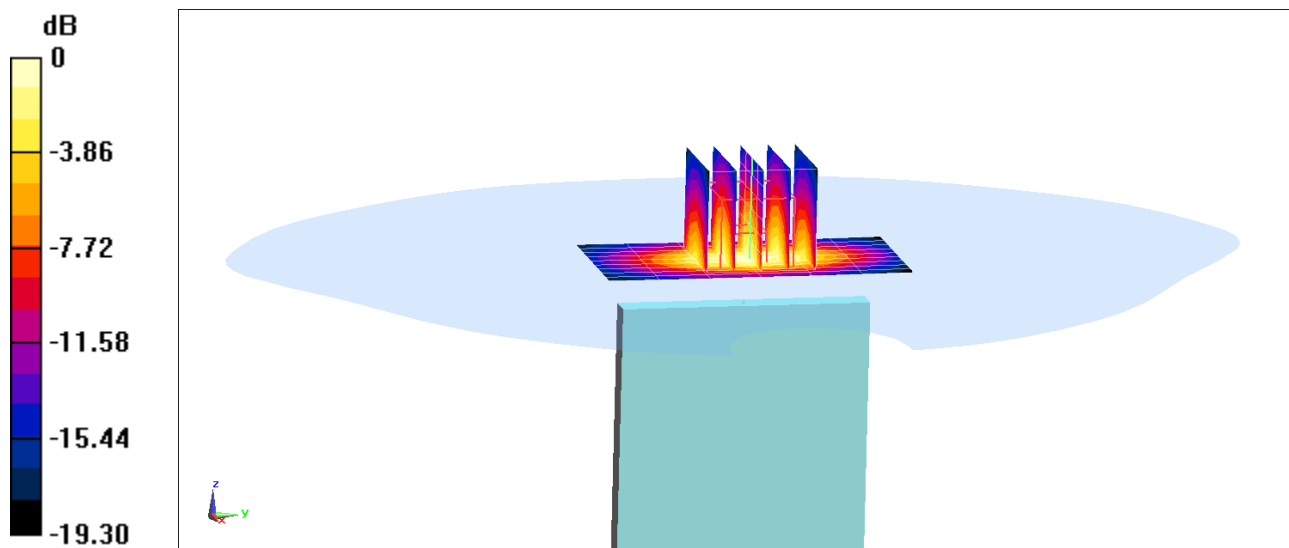

0 dB = 1.20 W/kg = 0.79 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0381M**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.97 \text{ S/m}$ ;  $\epsilon_r = 54.59$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/10/2020; Ambient Temp: 20.1°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 836.6 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 850, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 14.26 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.334 W/kg

**SAR(1 g) = 0.193 W/kg**

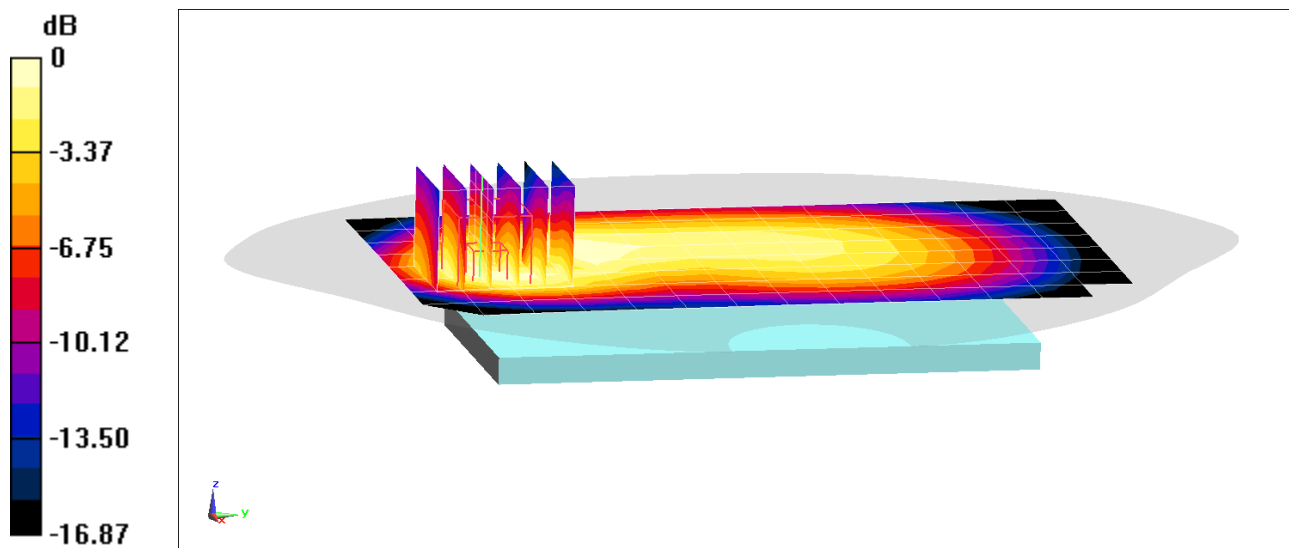

0 dB = 0.270 W/kg = -5.69 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0381M**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.97 \text{ S/m}$ ;  $\epsilon_r = 54.59$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/10/2020; Ambient Temp: 20.1°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 836.6 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 850, Body SAR, Back side, Mid.ch**



**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 20.36 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.720 W/kg

**SAR(1 g) = 0.395 W/kg**

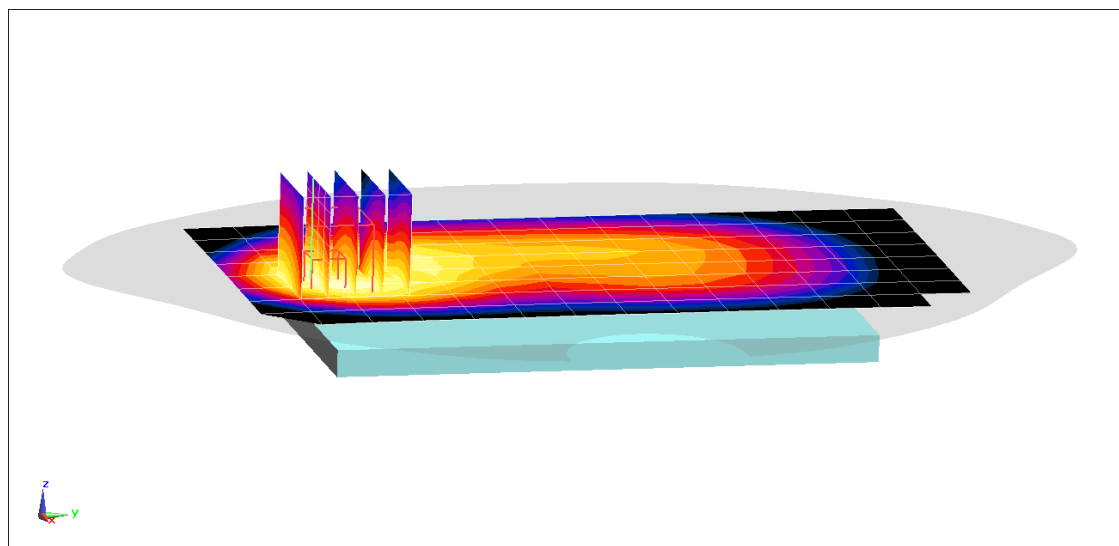

0 dB = 0.574 W/kg = -2.41 dBW/kg



# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0387M**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$ ;  $\sigma = 0.928 \text{ S/m}$ ;  $\epsilon_r = 53.99$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03/09/2020; Ambient Temp: 23.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7547; ConvF(9.81, 9.81, 9.81) @ 707.5 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.32 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.208 W/kg

**SAR(1 g) = 0.160 W/kg**

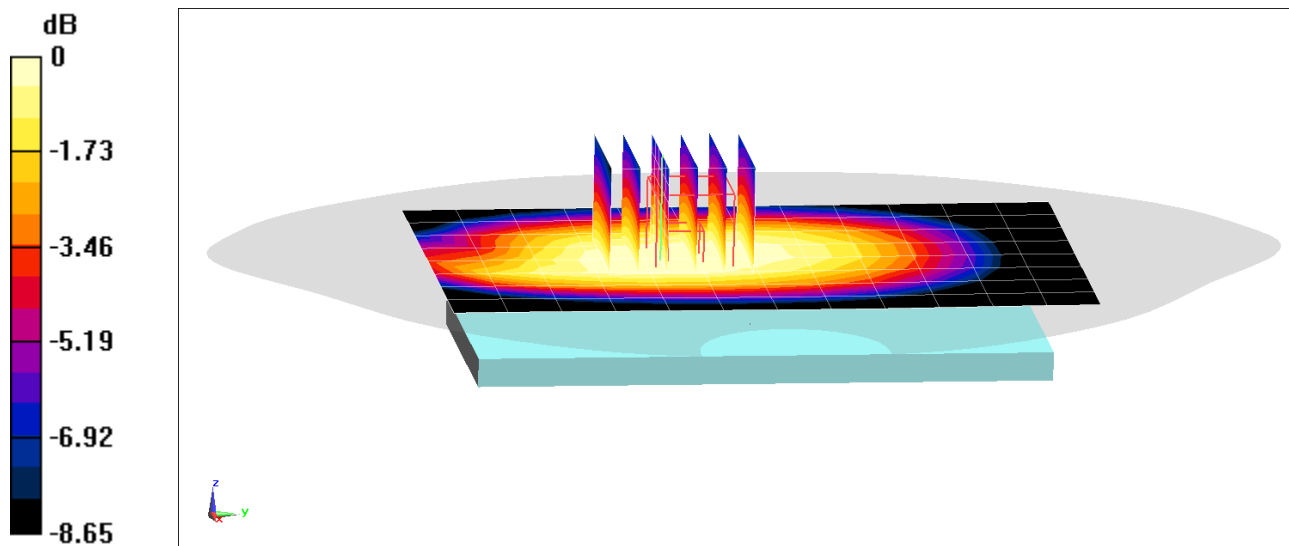

0 dB = 0.191 W/kg = -7.19 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0464M**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$ ;  $\sigma = 0.942 \text{ S/m}$ ;  $\epsilon_r = 54.266$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/11/2020; Ambient Temp: 22.0°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7551; ConvF(10.09, 10.09, 10.09) @ 707.5 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (8x10x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.97 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.373 W/kg

**SAR(1 g) = 0.200 W/kg**

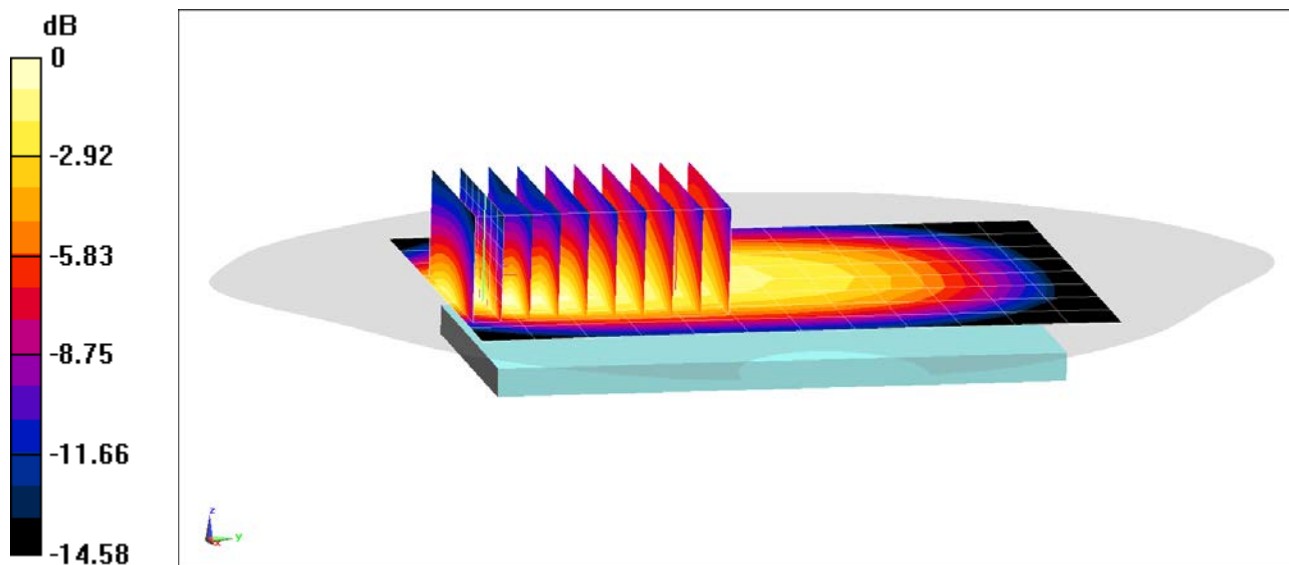

0 dB = 0.293 W/kg = -5.33 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0387M**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$ ;  $\sigma = 0.951 \text{ S/m}$ ;  $\epsilon_r = 54.207$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/17/2020; Ambient Temp: 23.9°C; Tissue Temp: 19.4°C

Probe: EX3DV4 - SN7551; ConvF(10.09, 10.09, 10.09) @ 782 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.36 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.255 W/kg

**SAR(1 g) = 0.191 W/kg**

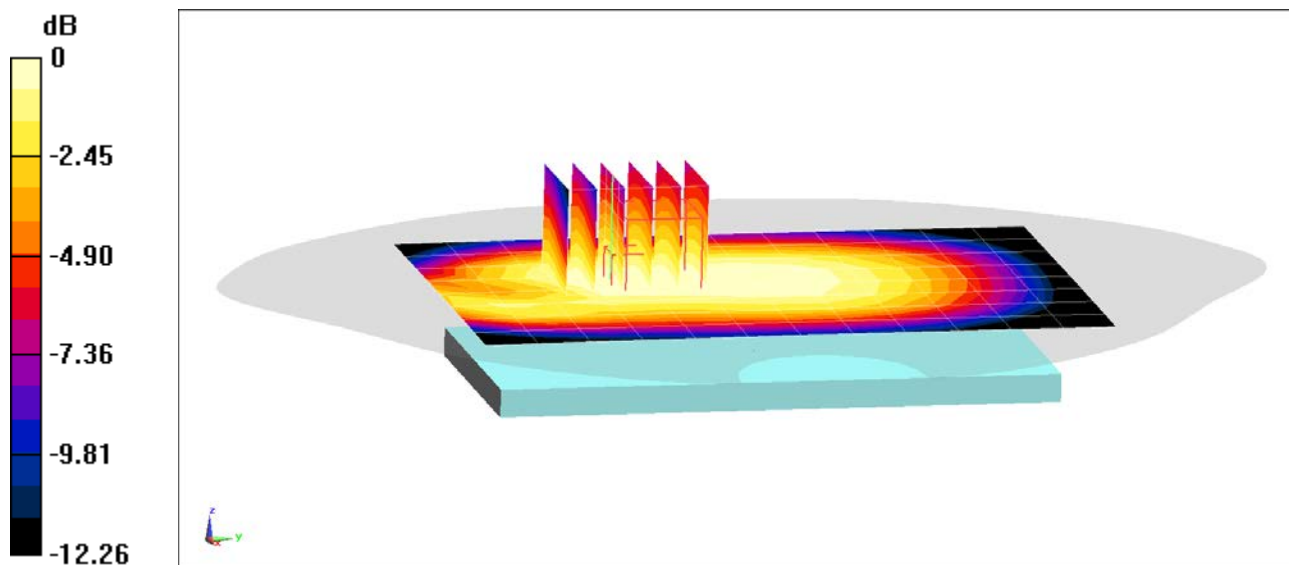

0 dB = 0.232 W/kg = -6.35 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0387M**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$ ;  $\sigma = 0.951 \text{ S/m}$ ;  $\epsilon_r = 54.207$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/17/2020; Ambient Temp: 23.9°C; Tissue Temp: 19.4°C

Probe: EX3DV4 - SN7551; ConvF(10.09, 10.09, 10.09) @ 782 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.66 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.553 W/kg

**SAR(1 g) = 0.298 W/kg**

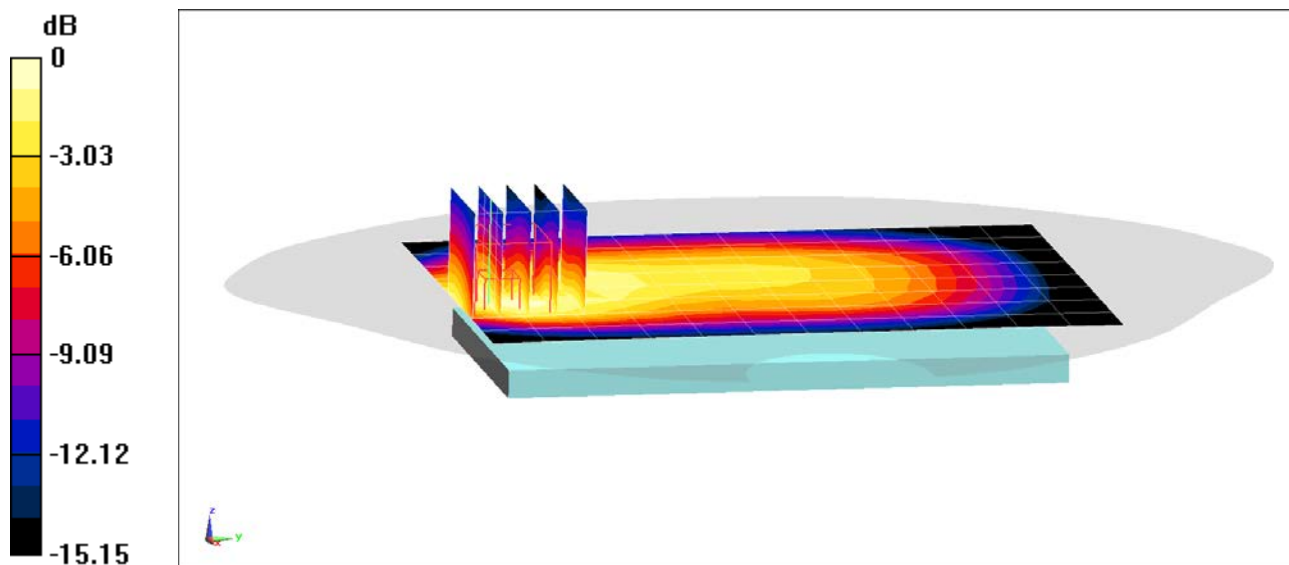

0 dB = 0.444 W/kg = -3.53 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0387M**

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$ ;  $\sigma = 0.95 \text{ S/m}$ ;  $\epsilon_r = 54.472$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/12/2020; Ambient Temp: 22.7°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7409; ConvF(9.74, 9.74, 9.74) @ 836.5 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.47 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.232 W/kg

**SAR(1 g) = 0.167 W/kg**

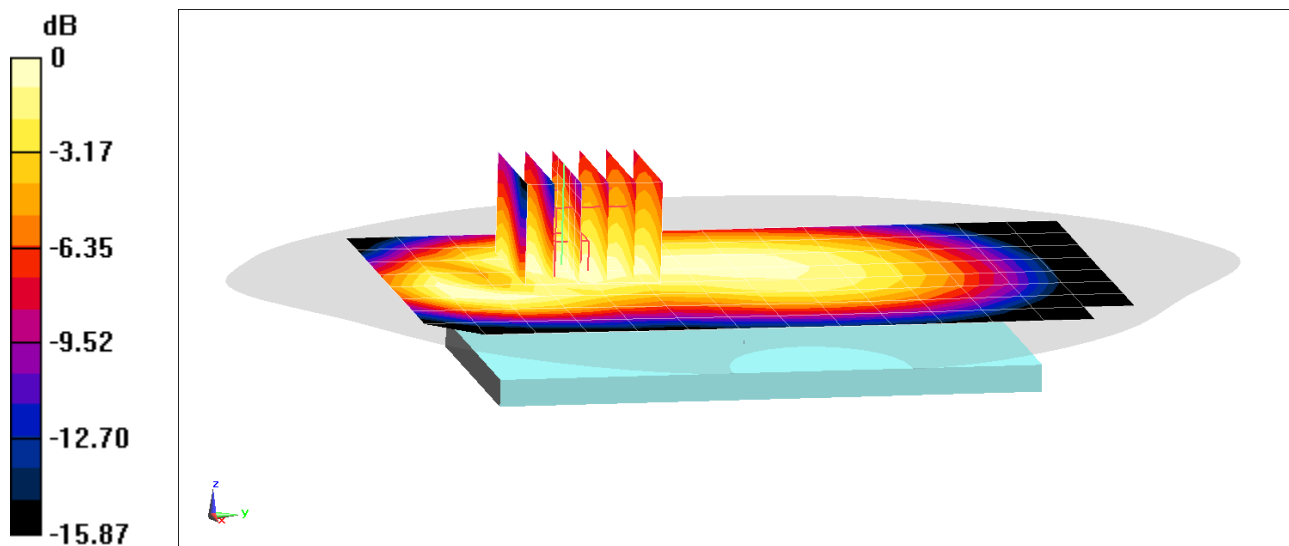

0 dB = 0.207 W/kg = -6.84 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0387M**

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.5$  MHz;  $\sigma = 0.95$  S/m;  $\epsilon_r = 54.472$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/12/2020; Ambient Temp: 22.7°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7409; ConvF(9.74, 9.74, 9.74) @ 836.5 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.64 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.658 W/kg

**SAR(1 g) = 0.364 W/kg**

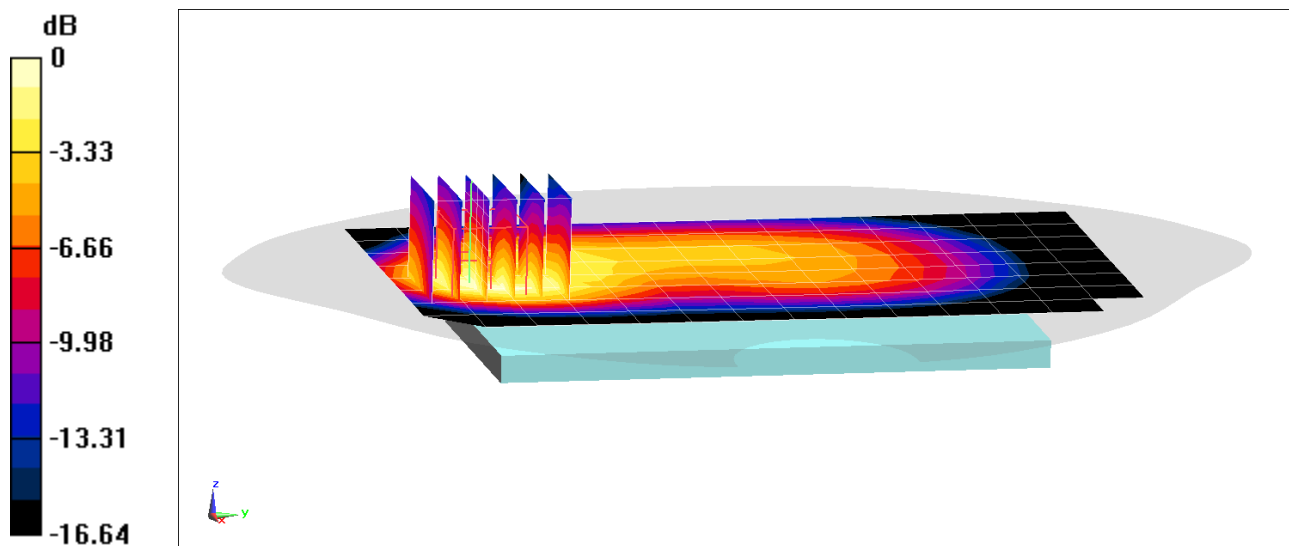

0 dB = 0.527 W/kg = -2.78 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0375M**

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.472 \text{ S/m}$ ;  $\epsilon_r = 55.158$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/10/2020; Ambient Temp: 21.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7357; ConvF(8.26, 8.26, 8.26) @ 1732.5 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.23 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.984 W/kg

**SAR(1 g) = 0.616 W/kg**

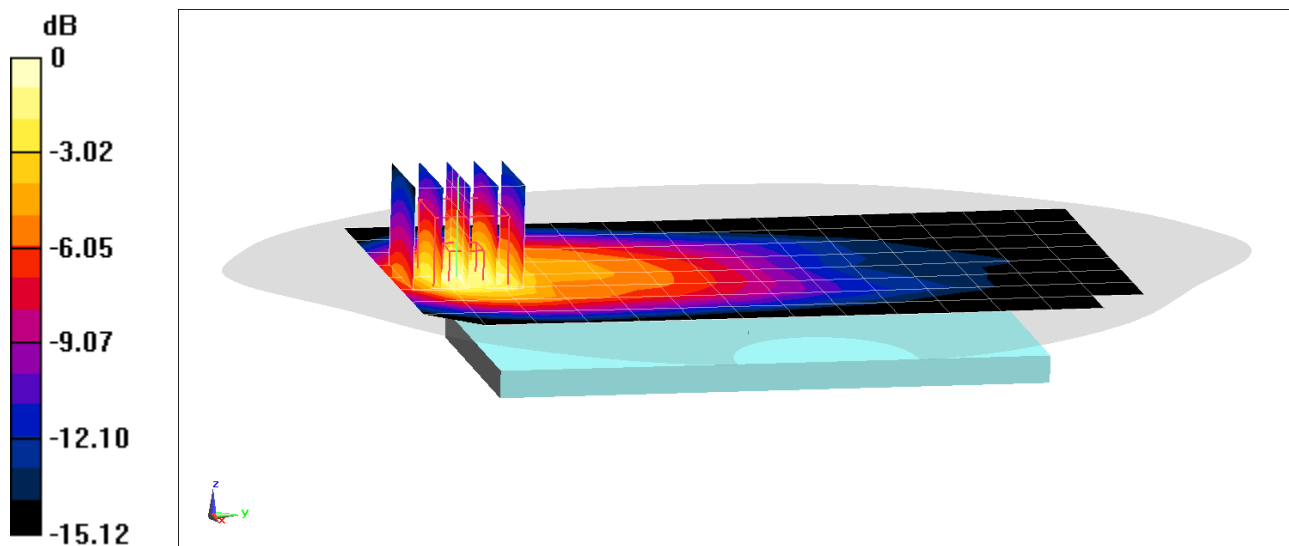

0 dB = 0.841 W/kg = -0.75 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0378M**

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5$  MHz;  $\sigma = 1.485$  S/m;  $\epsilon_r = 51.075$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/04/2020; Ambient Temp: 22.7°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(8.08, 8.08, 8.08) @ 1732.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 4 (AWS), Body SAR, Bottom Edge, Mid.ch,  
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset**


**Area Scan (10x8x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.62 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.88 W/kg

**SAR(1 g) = 1.08 W/kg**

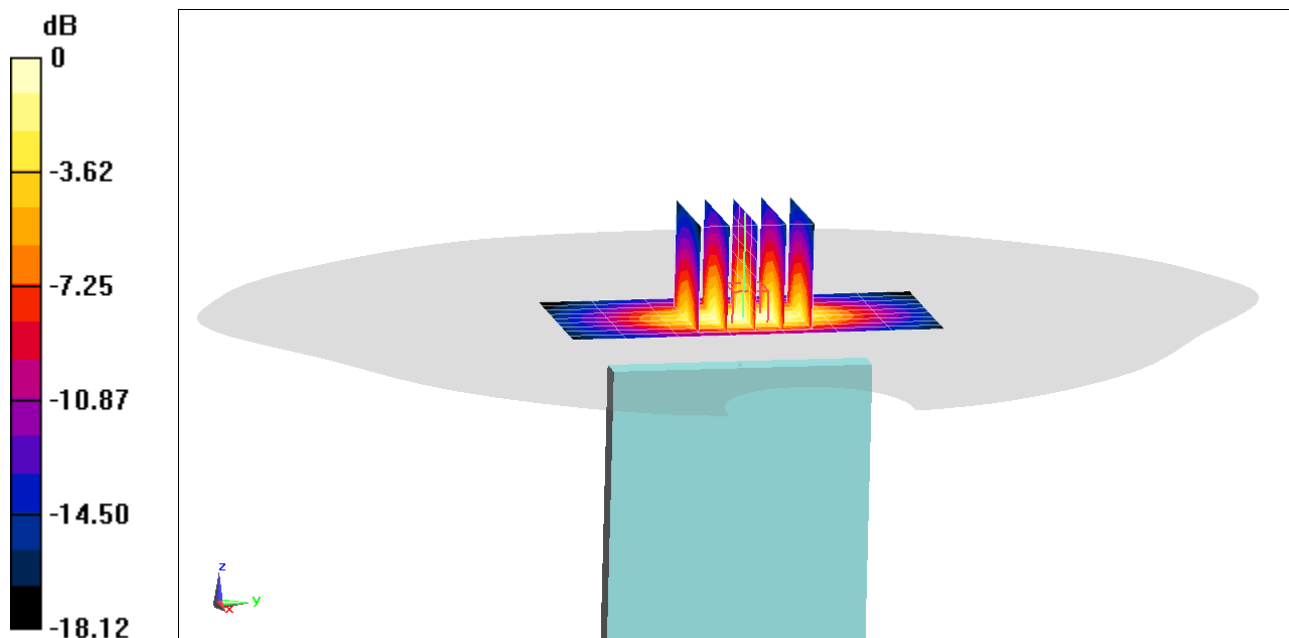

0 dB = 1.62 W/kg = 2.10 dBW/kg



# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 1157M**

Communication System: UID 0, LTE Band 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2593 \text{ MHz}$ ;  $\sigma = 2.215 \text{ S/m}$ ;  $\epsilon_r = 51.562$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03/09/2020; Ambient Temp: 20.9°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7357; ConvF(7.39, 7.39, 7.39) @ 2593 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41 ULCA, Body SAR, Back side,**  
**PCC: 20 MHz Bandwidth, Ch. 40620, QPSK, 1 RB, 0 RB Offset**  
**SCC: 20 MHz Bandwidth, Ch. 40422, QPSK, 1 RB, 99 RB Offset**


**Area Scan (11x16x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.19 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.575 W/kg

**SAR(1 g) = 0.304 W/kg**

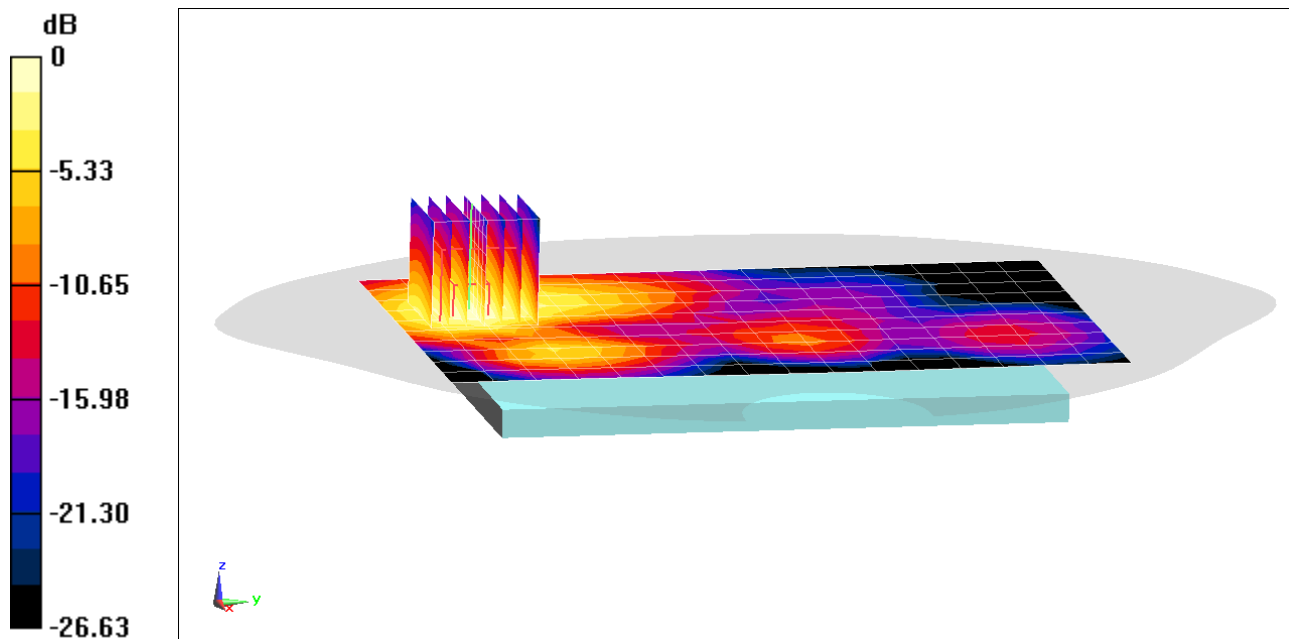

0 dB = 0.468 W/kg = -3.30 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 1157M**

Communication System: UID 0, LTE Band 41; Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2506 \text{ MHz}$ ;  $\sigma = 2.069 \text{ S/m}$ ;  $\epsilon_r = 52.324$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/12/2020; Ambient Temp: 23.0°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7357; ConvF(7.59, 7.59, 7.59) @ 2506 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41 ULCA, Body SAR, Bottom Edge,**  
**PCC: 20 MHz Bandwidth, Ch. 39750, QPSK, 1 RB, 99 RB Offset**  
**SCC: 20 MHz Bandwidth, Ch. 39948, QPSK, 1 RB, 0 RB Offset**


**Area Scan (11x10x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 20.79 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.55 W/kg

**SAR(1 g) = 0.768 W/kg**

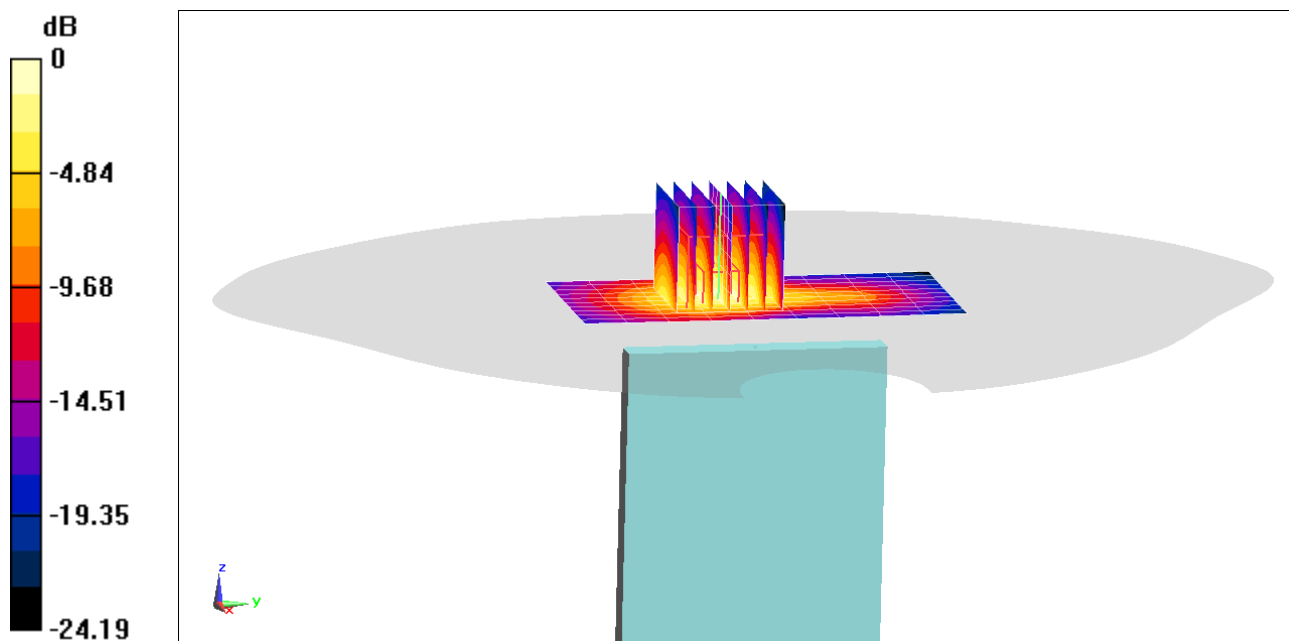

0 dB = 1.23 W/kg = 0.90 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0899M**

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$ ;  $\sigma = 2.005 \text{ S/m}$ ;  $\epsilon_r = 52.974$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/24/2020; Ambient Temp: 21.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF(7.41, 7.41, 7.41) @ 2462 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11b Ant 1, 22 MHz Bandwidth,  
Body SAR, Ch 11, 1 Mbps, Back Side**


**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.113 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.225 W/kg

**SAR(1 g) = 0.121 W/kg**

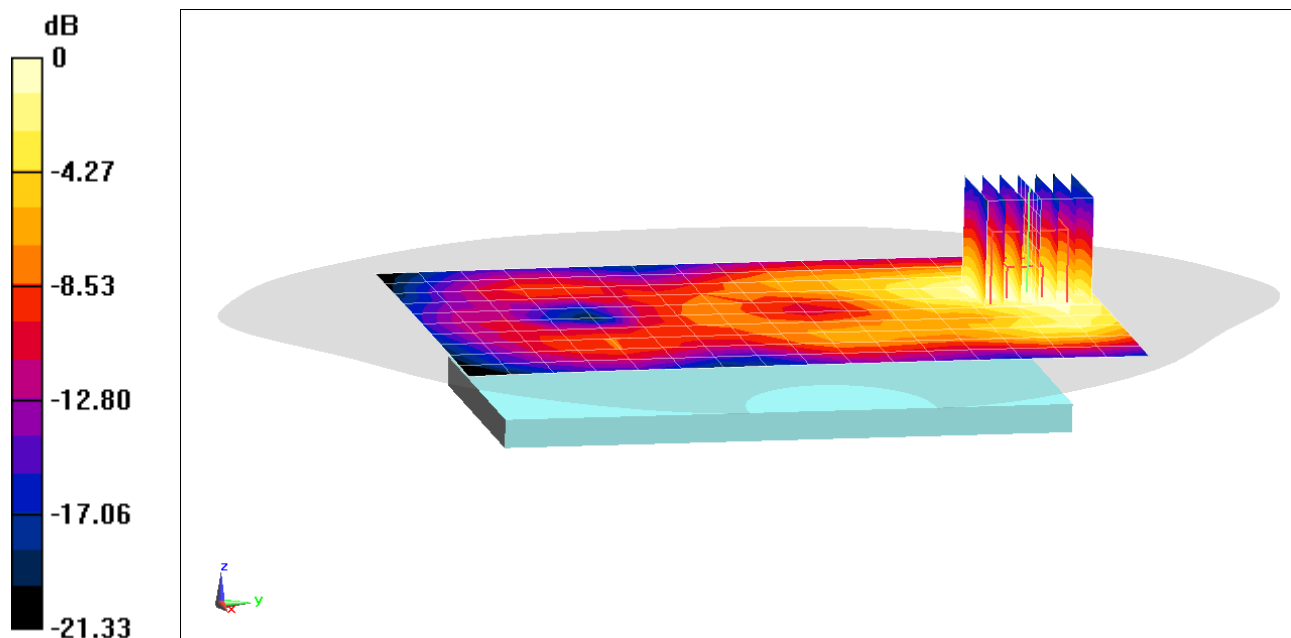

0 dB = 0.184 W/kg = -7.35 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0899M**

Communication System: UID 0, 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$ ;  $\sigma = 2.005 \text{ S/m}$ ;  $\epsilon_r = 52.974$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/24/2020; Ambient Temp: 21.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF(7.41, 7.41, 7.41) @ 2462 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11b Ant 1, 22 MHz Bandwidth,  
Body SAR, Ch 11, 1 Mbps, Top Edge**


**Area Scan (10x9x1):** Measurement grid: dx=5mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.11 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.719 W/kg

**SAR(1 g) = 0.357 W/kg**

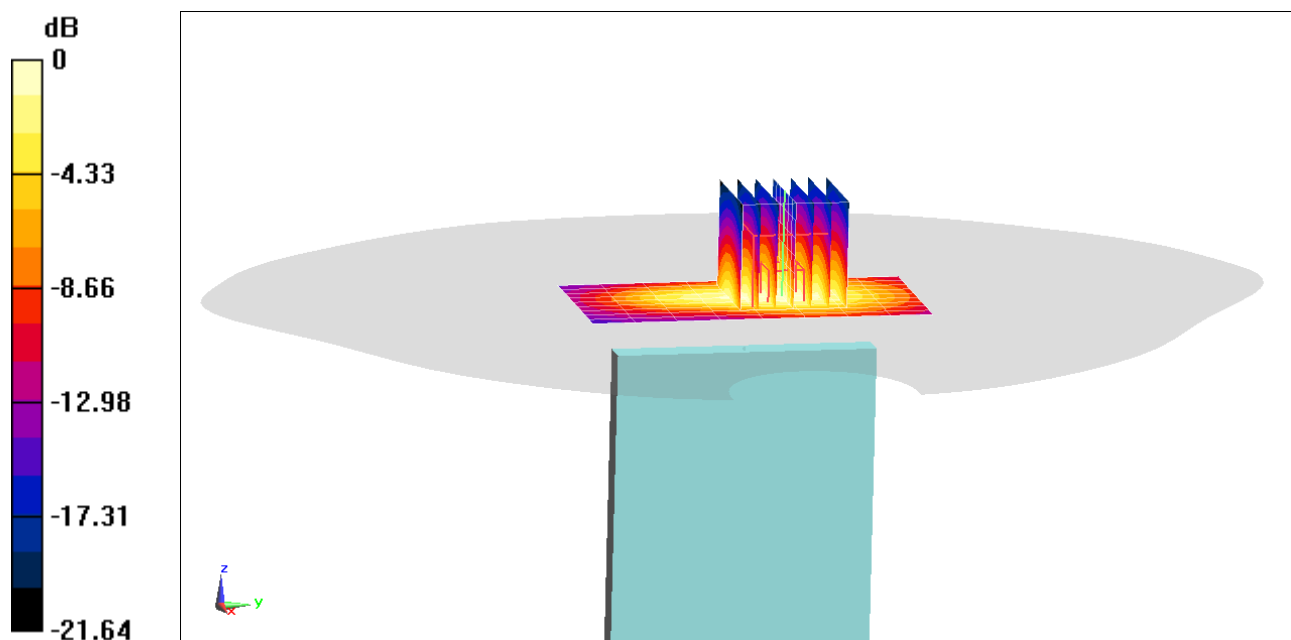

0 dB = 0.579 W/kg = -2.37 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0936M**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5785 \text{ MHz}$ ;  $\sigma = 6.23 \text{ S/m}$ ;  $\epsilon_r = 46.364$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/24/2020; Ambient Temp: 23.7°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7409; ConvF(4.23, 4.23, 4.23) @ 5785 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11a Ant 2, UNII-3, 20 MHz Bandwidth,  
Body SAR, Ch 157, 6 Mbps, Back Side**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x8)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 6.944 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.287 W/kg**

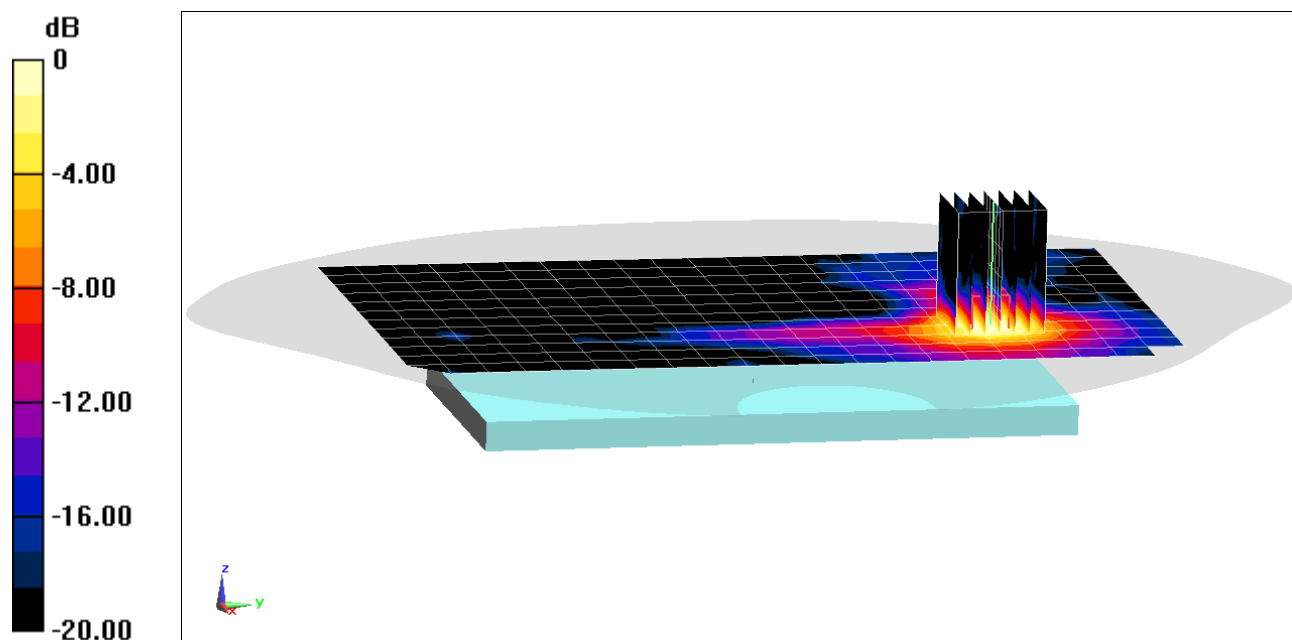

0 dB = 0.686 W/kg = -1.64 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0936M**

Communication System: UID 0, 802.11n 5.2-5.8 GHz Band; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body; Medium parameters used:

$f = 5825 \text{ MHz}$ ;  $\sigma = 6.295 \text{ S/m}$ ;  $\epsilon_r = 46.355$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/17/2020; Ambient Temp: 22.8°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7409; ConvF(4.23, 4.23, 4.23) @ 5825 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11n MIMO, UNII-3, 20 MHz Bandwidth,  
Body SAR, Ch 165, 13 Mbps, Back Side**


**Area Scan (13x22x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

**Zoom Scan (7x7x8)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Reference Value = 1.213 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.78 W/kg

**SAR(1 g) = 0.620 W/kg**

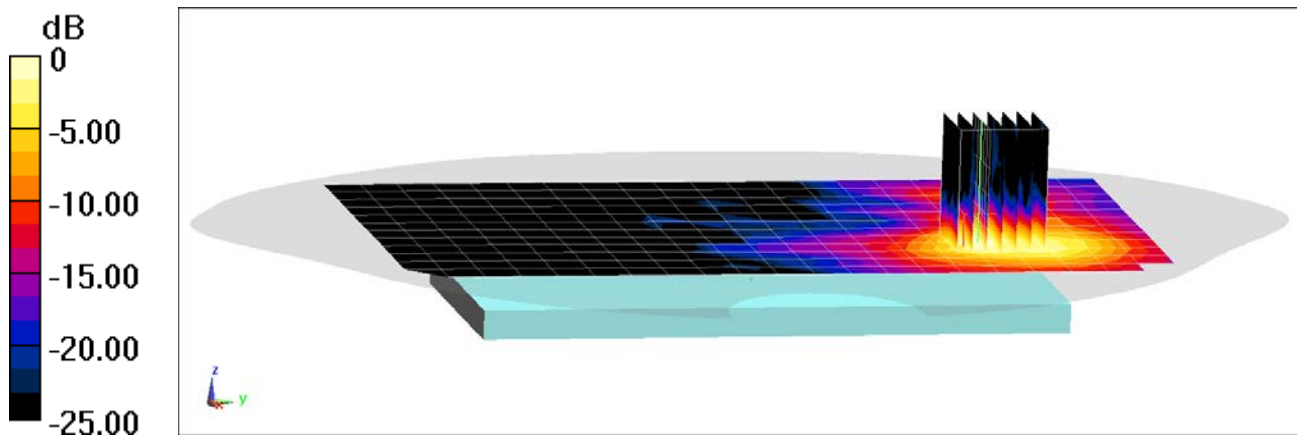

0 dB = 1.56 W/kg = 1.93 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0936M**

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.297

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2441$  MHz;  $\sigma = 2.021$  S/m;  $\epsilon_r = 51.762$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/28/2020; Ambient Temp: 23.0°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2441 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Bluetooth, Body SAR, Ch 39, 1 Mbps, Back Side**


**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (9x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.322 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0510 W/kg

**SAR(1 g) = 0.013 W/kg**

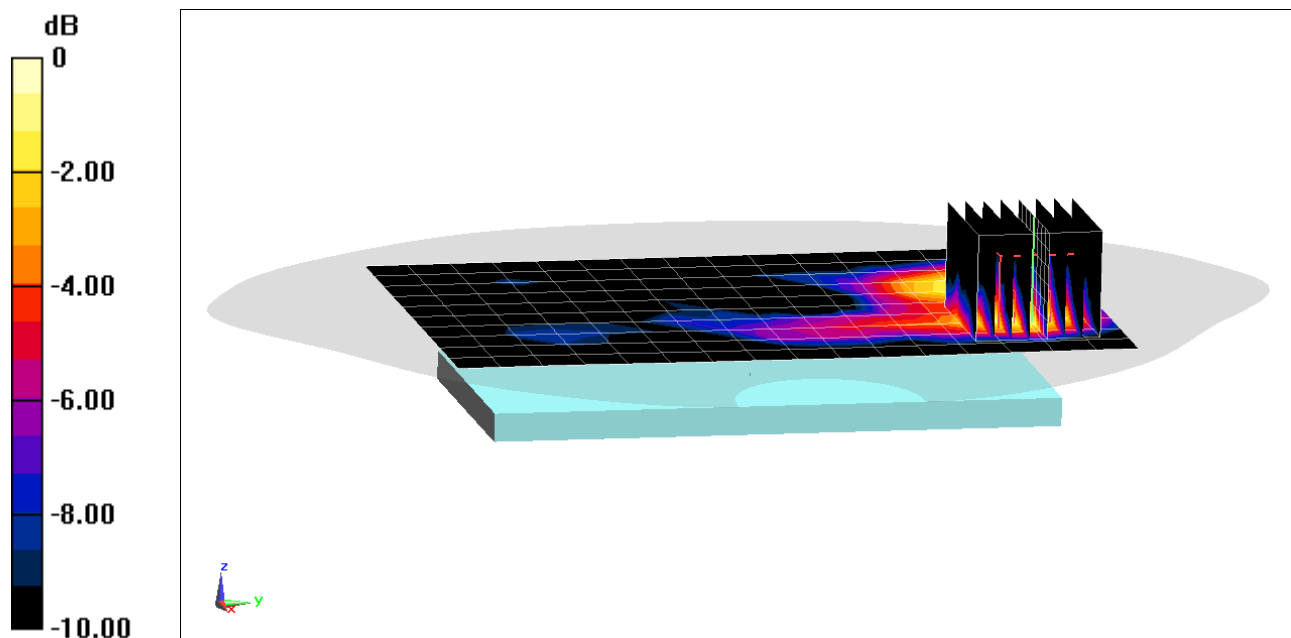

0 dB = 0.0210 W/kg = -16.78 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0936M**

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.297

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$ ;  $\sigma = 2.021 \text{ S/m}$ ;  $\epsilon_r = 51.762$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/28/2020; Ambient Temp: 23.0°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2441 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Bluetooth, Body SAR, Ch 39, 1 Mbps, Top Edge**


**Area Scan (10x11x1):** Measurement grid: dx=5mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.359 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.100 W/kg

**SAR(1 g) = 0.052 W/kg**

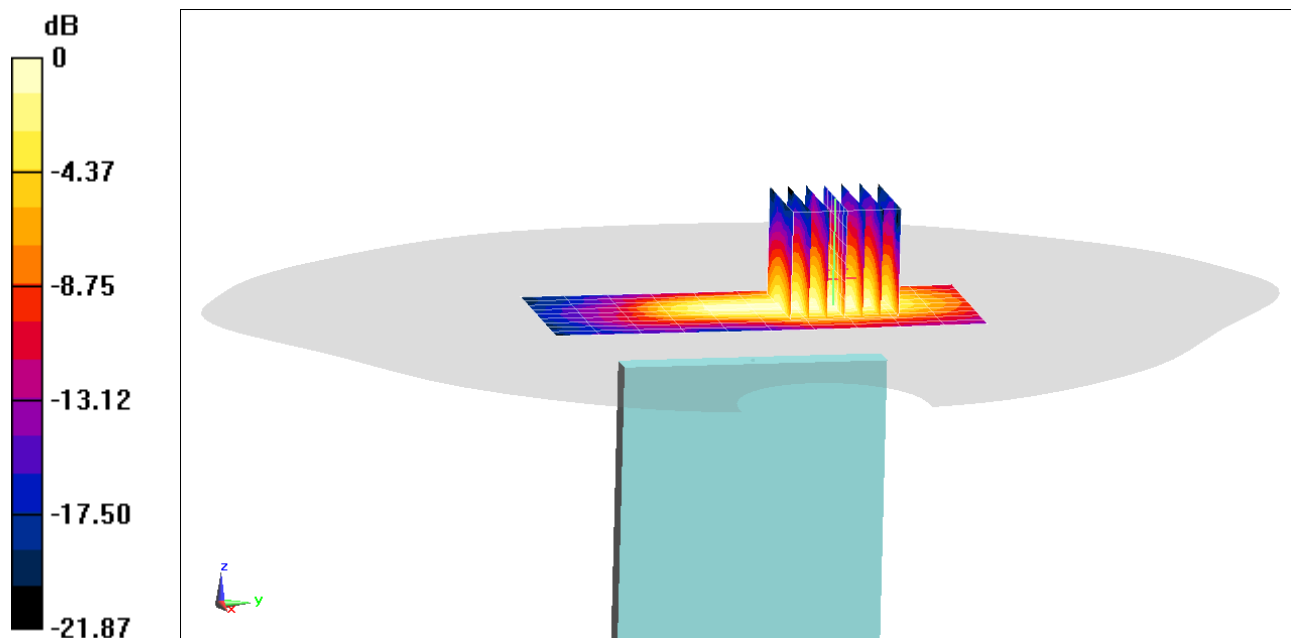

0 dB = 0.0820 W/kg = -10.86 dBW/kg



# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0588M**

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.076

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.532 \text{ S/m}$ ;  $\epsilon_r = 53.26$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03/06/2020; Ambient Temp: 21.7°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1880 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: GPRS 1900, Phablet SAR, Bottom Edge, Mid.ch, 4 Tx Slots**


**Area Scan (10x9x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (10x10x8)/Cube 0:** Measurement grid:  $dx=3.8\text{mm}$ ,  $dy=3.8\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Reference Value = 70.88 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 17.3 W/kg

**SAR(10 g) = 2.59 W/kg**

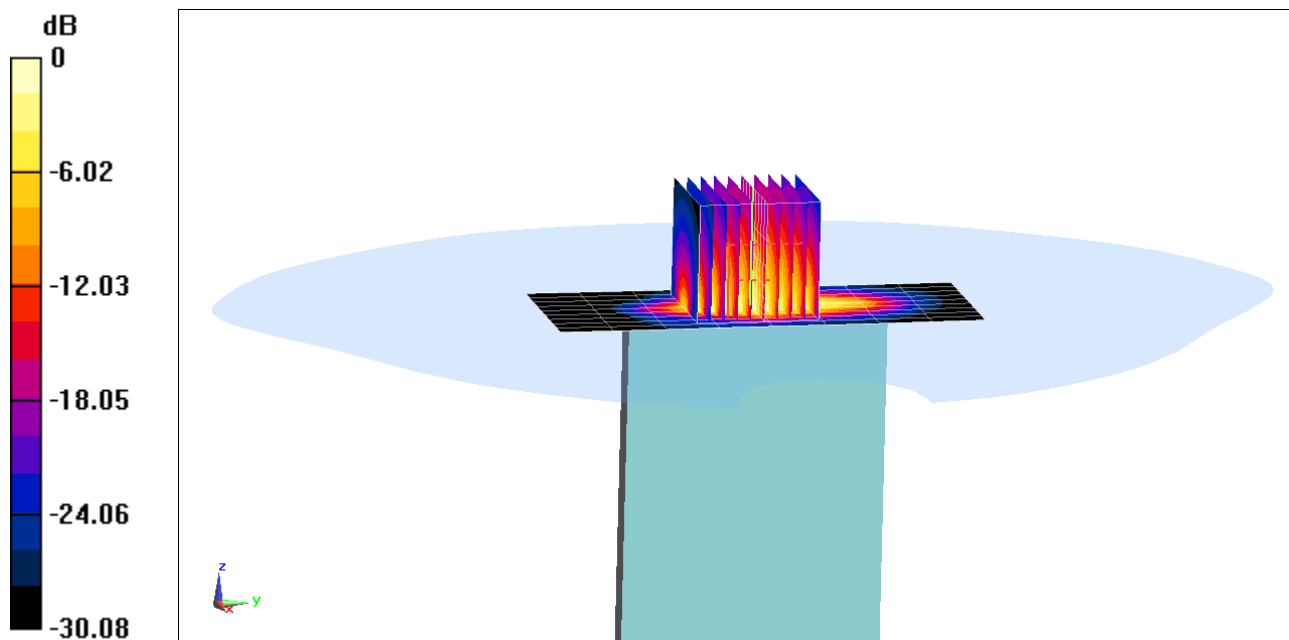

0 dB = 11.8 W/kg = 10.72 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0378M**

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5$  MHz;  $\sigma = 1.485$  S/m;  $\epsilon_r = 51.075$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03/04/2020; Ambient Temp: 22.7°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(8.08, 8.08, 8.08) @ 1732.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 4 (AWS), Phablet SAR, Bottom Edge, Mid.ch,  
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset**


**Area Scan (10x8x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (9x9x8)/Cube 0:** Measurement grid: dx=3.8mm, dy=3.8mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 73.71 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 18.3 W/kg

**SAR(10 g) = 2.83 W/kg**

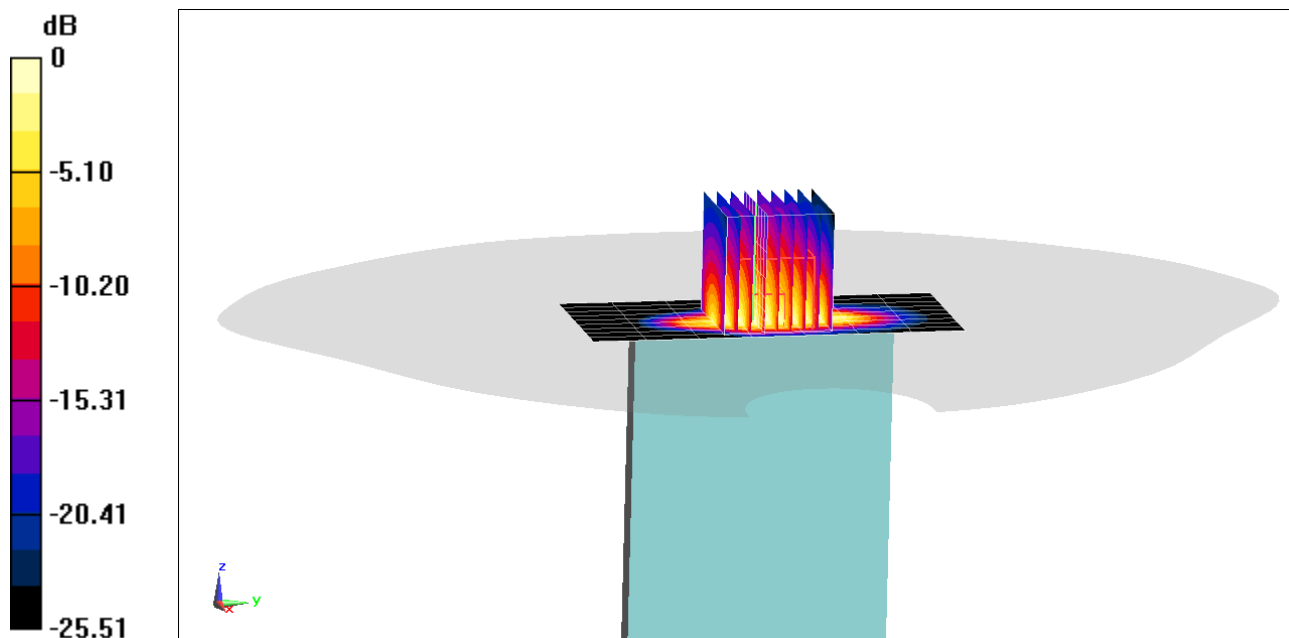

0 dB = 12.8 W/kg = 11.07 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 1157M**

Communication System: UID 0, LTE Band 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2593 \text{ MHz}$ ;  $\sigma = 2.21 \text{ S/m}$ ;  $\epsilon_r = 51.775$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03/16/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7547; ConvF(7.18, 7.18, 7.18) @ 2593 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41 ULCA, Phablet SAR, Bottom Edge,**  
**PCC: 20 MHz Bandwidth, Ch. 40620, QPSK, 1 RB, 0 RB Offset**  
**SCC: 20 MHz Bandwidth, Ch. 40422, QPSK, 1 RB, 99 RB Offset**


**Area Scan (11x10x1):** Measurement grid: dx=5mm, dy=12mm

**Zoom Scan (14x14x8)/Cube 0:** Measurement grid: dx=2.4mm, dy=2.4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 63.80 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 40.1 W/kg

**SAR(10 g) = 2.67 W/kg**

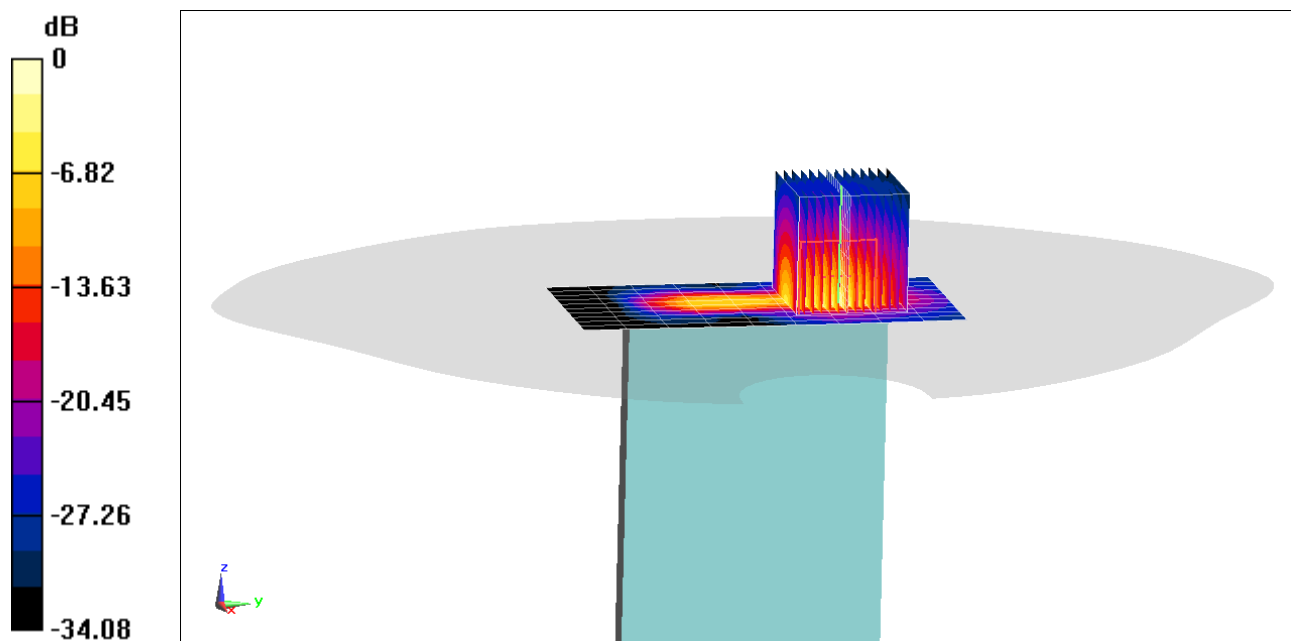

0 dB = 22.7 W/kg = 13.56 dBW/kg

# PCTEST

**DUT: A3LSMG986JPN; Type: Portable Handset; Serial: 0936M**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body; Medium parameters used:

$f = 5280 \text{ MHz}$ ;  $\sigma = 5.545 \text{ S/m}$ ;  $\epsilon_r = 47.186$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 02/24/2020; Ambient Temp: 23.7°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7409; ConvF(4.7, 4.7, 4.7) @ 5280 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11a Ant 1, U-NII-2A, 20 MHz Bandwidth,  
Phablet SAR, Ch 56, 6 Mbps, Back Side**


**Area Scan (13x22x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

**Zoom Scan (9x9x8)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Reference Value = 3.504 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 21.4 W/kg

**SAR(10 g) = 1.19 W/kg**

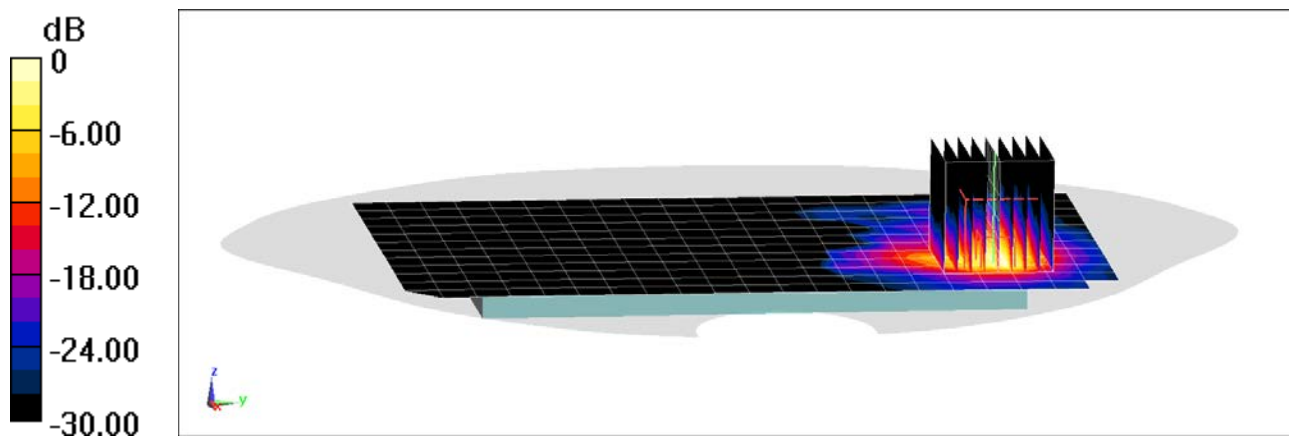

0 dB = 11.7 W/kg = 10.68 dBW/kg

## APPENDIX B: SYSTEM VERIFICATION

# PCTEST

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used:

$f = 750 \text{ MHz}$ ;  $\sigma = 0.877 \text{ S/m}$ ;  $\epsilon_r = 40.595$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/12/2020; Ambient Temp: 22.6°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7410; ConvF(9.95, 9.95, 9.95) @ 750 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 750 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.41 W/kg

**SAR(1 g) = 1.66 W/kg**

Deviation(1 g) = 0.24%

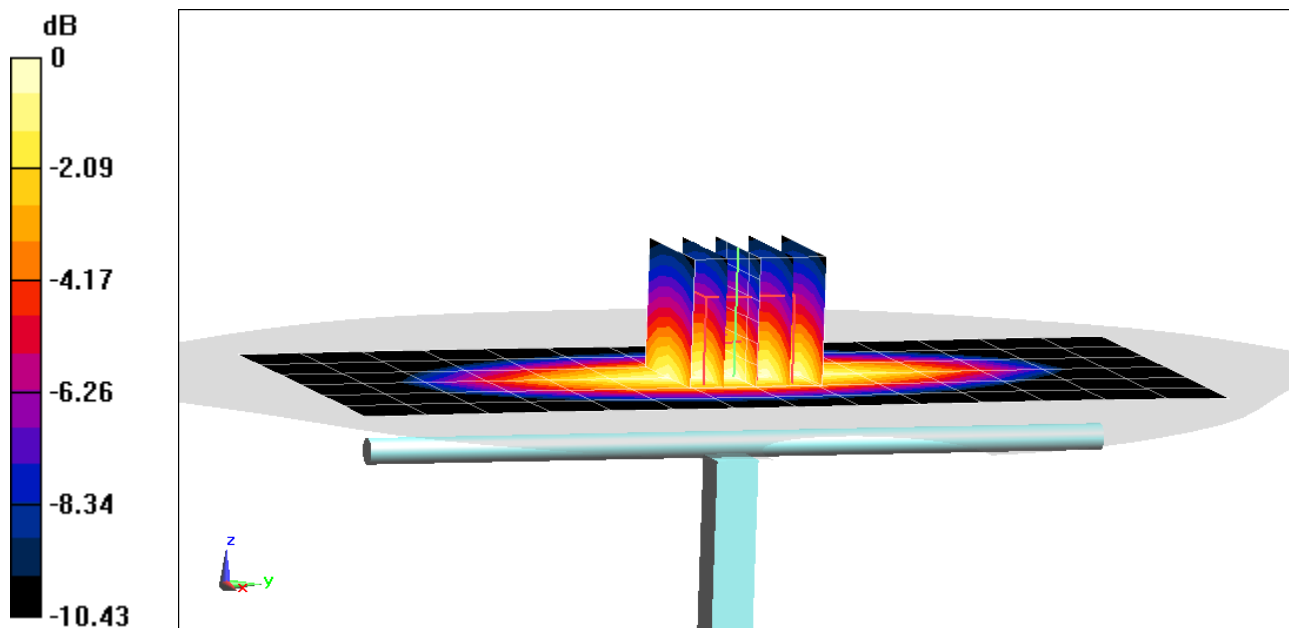

# PCTEST

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used:

$f = 750 \text{ MHz}$ ;  $\sigma = 0.898 \text{ S/m}$ ;  $\epsilon_r = 40.659$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/24/2020; Ambient Temp: 21.6°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7410; ConvF(9.95, 9.95, 9.95) @ 750 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## **750 MHz System Verification at 23.0 dBm (200 mW)**


**Area Scan (7x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.52 W/kg

**SAR(1 g) = 1.72 W/kg**

Deviation(1 g) = 3.74%

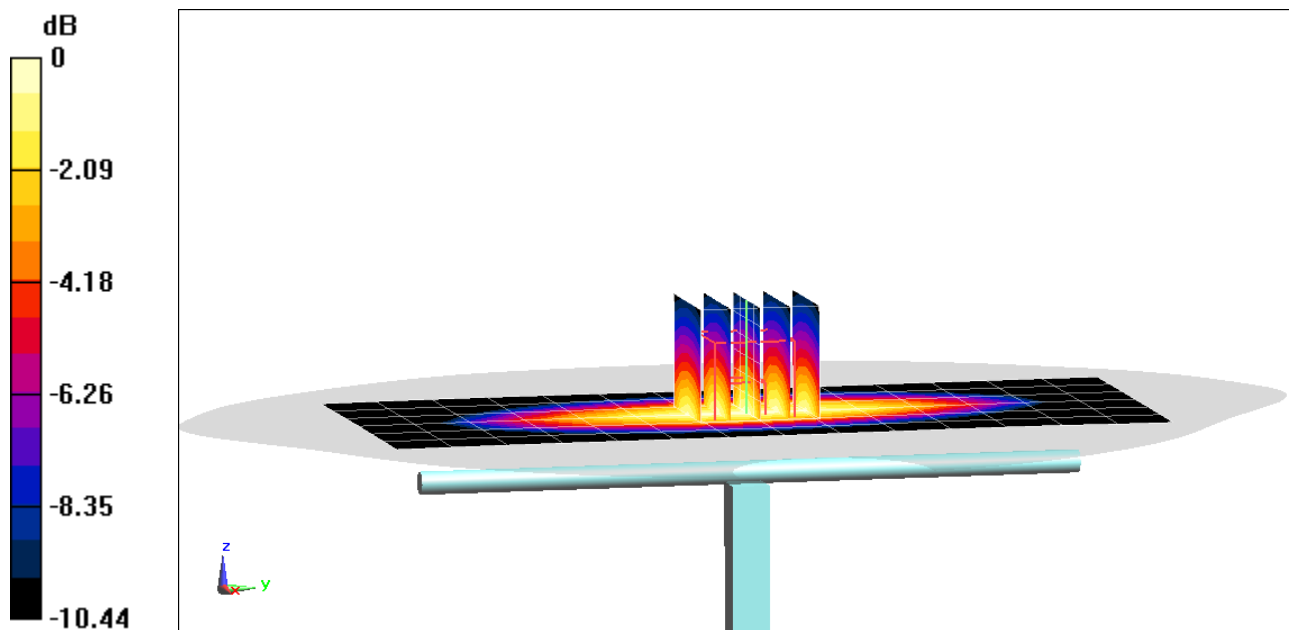

0 dB = 2.27 W/kg = 3.56 dBW/kg

# PCTEST

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.908 \text{ S/m}$ ;  $\epsilon_r = 40.342$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/12/2020; Ambient Temp: 22.6°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7410; ConvF(9.88, 9.88, 9.88) @ 835 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.06 W/kg

**SAR(1 g) = 2 W/kg**

Deviation(1 g) = 6.04%

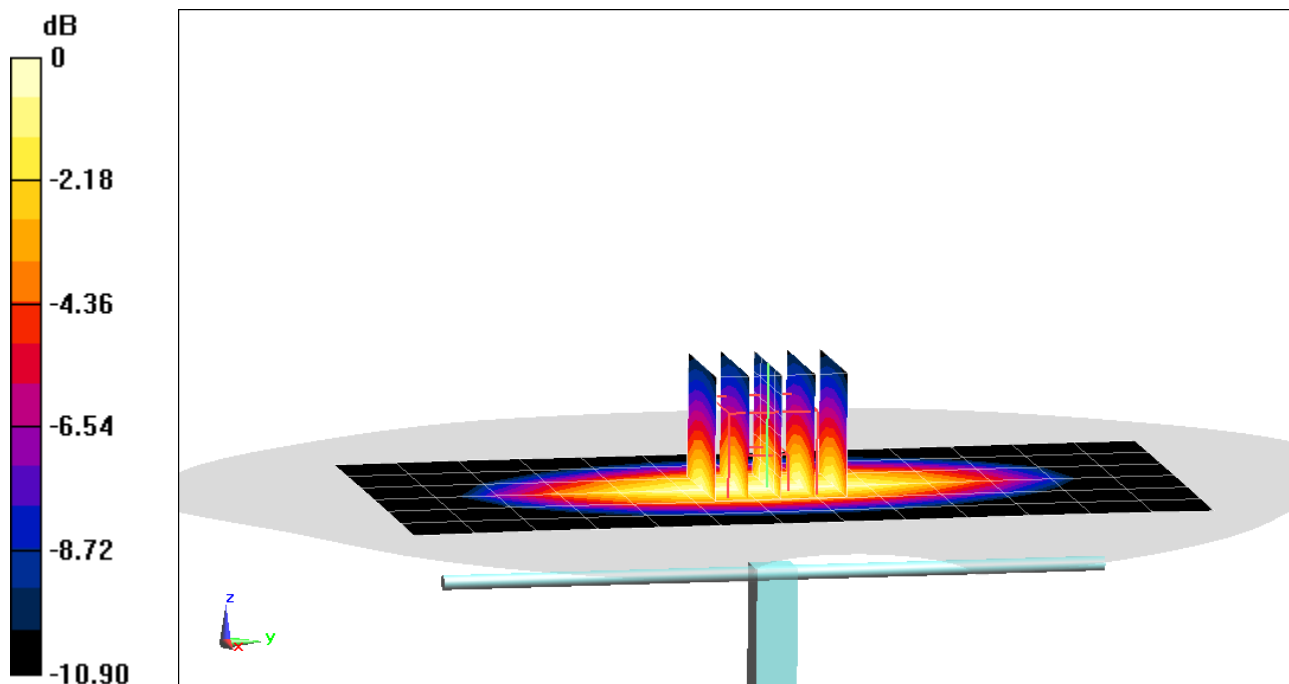

0 dB = 2.70 W/kg = 4.31 dBW/kg



# PCTEST

**DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.361 \text{ S/m}$ ;  $\epsilon_r = 39.889$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/17/2020; Ambient Temp: 22.7°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7410; ConvF(8.46, 8.46, 8.46) @ 1750 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.02 W/kg

**SAR(1 g) = 3.81 W/kg**

Deviation(1 g) = 5.25%

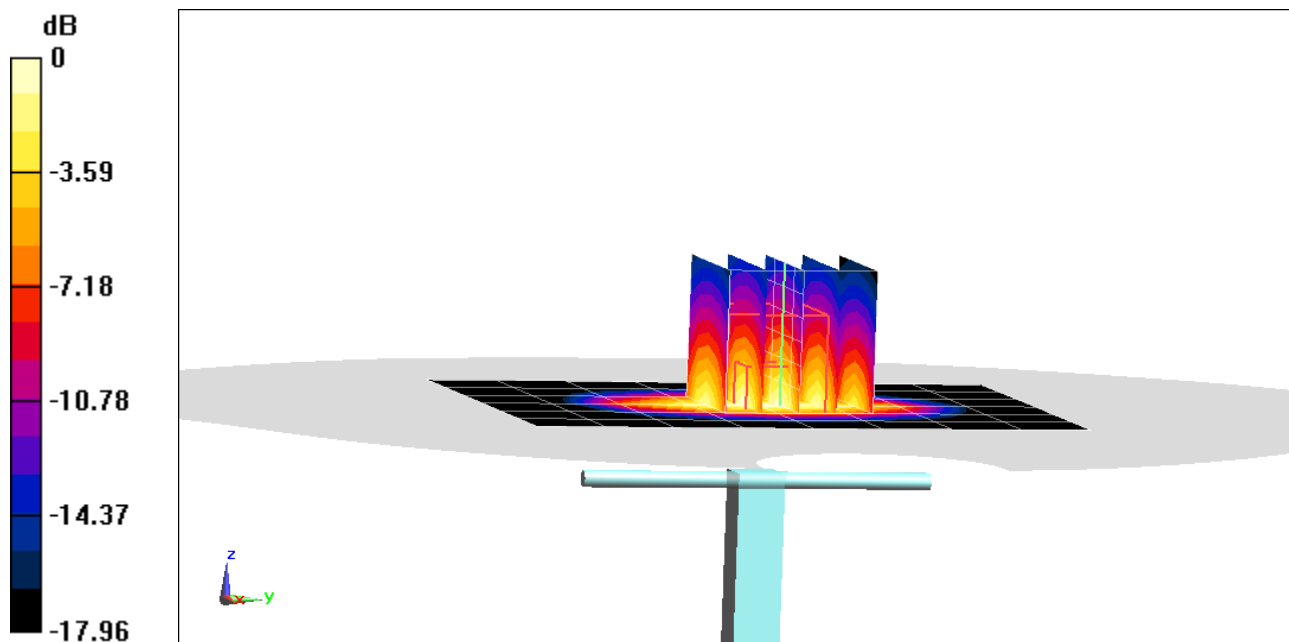

0 dB = 5.78 W/kg = 7.62 dBW/kg

# PCTEST

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.442 \text{ S/m}$ ;  $\epsilon_r = 38.065$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/11/2020; Ambient Temp: 19.6°C; Tissue Temp: 19.8°C

Probe: EX3DV4 - SN7410; ConvF(8.11, 8.11, 8.11) @ 1900 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 8.16 W/kg

**SAR(1 g) = 4.3 W/kg**

Deviation(1 g) = 8.04%

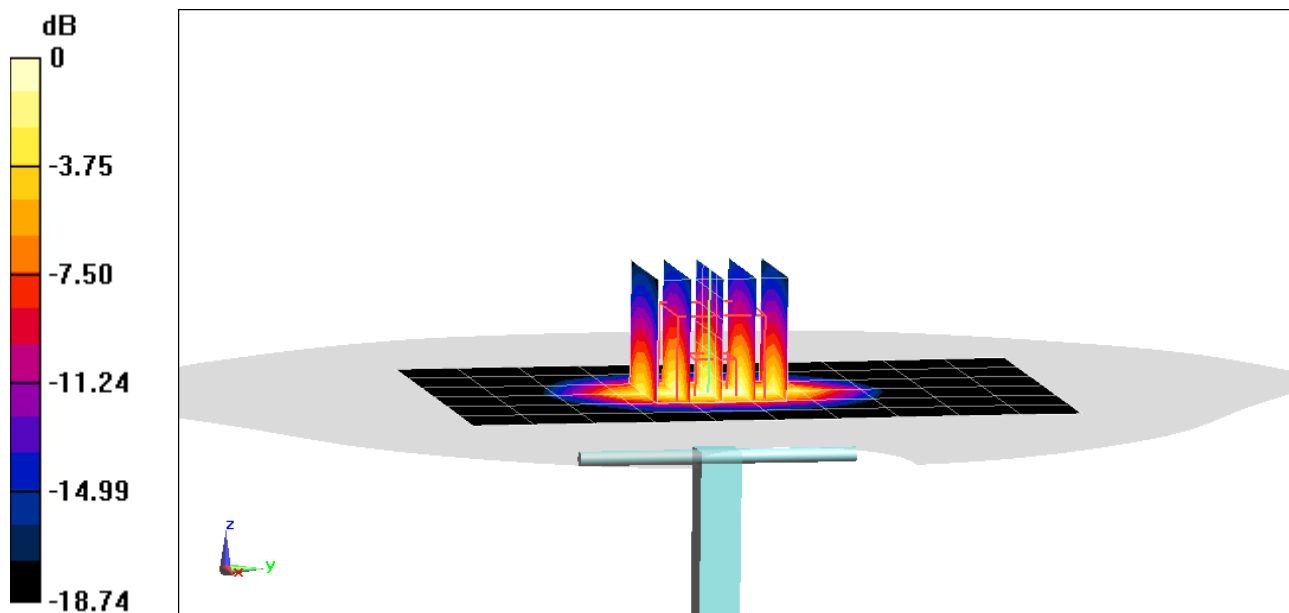

0 dB = 6.79 W/kg = 8.32 dBW/kg

# PCTEST

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.843 \text{ S/m}$ ;  $\epsilon_r = 37.968$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/19/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7570; ConvF(7.52, 7.52, 7.52) @ 2450 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## **2450 MHz System Verification at 20.0 dBm (100 mW)**


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.7 W/kg

**SAR(1 g) = 5.4 W/kg**

Deviation(1 g) = 2.47%

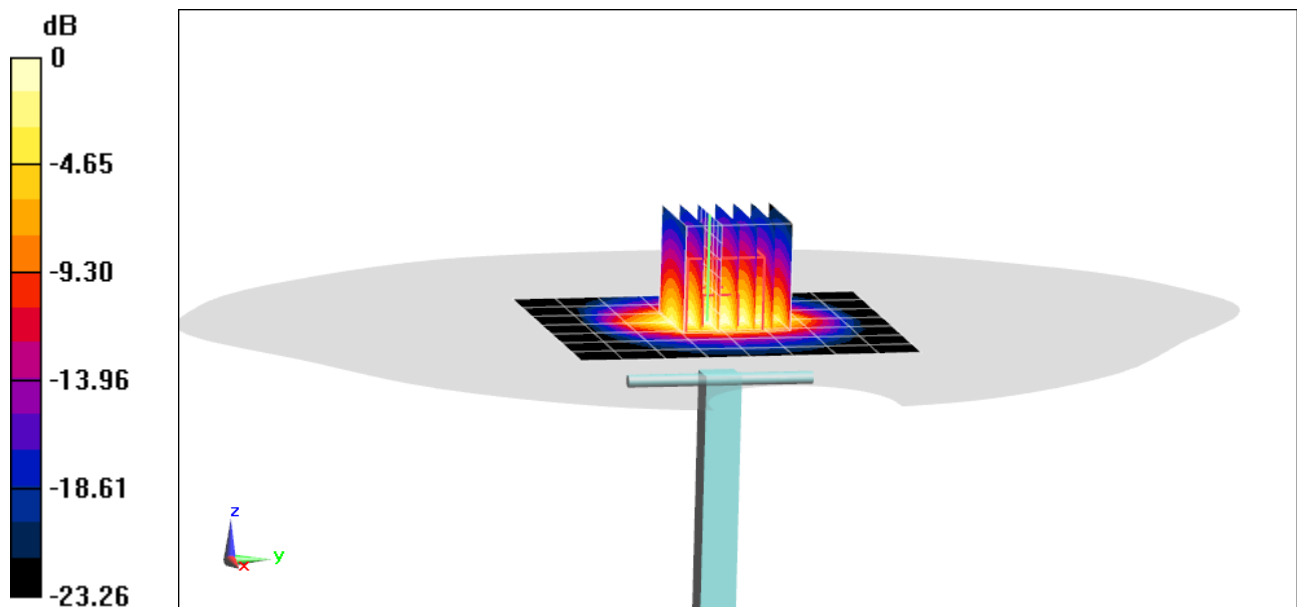

0 dB = 9.10 W/kg = 9.59 dBW/kg

# PCTEST

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.857 \text{ S/m}$ ;  $\epsilon_r = 38.723$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/24/2020; Ambient Temp: 21.0°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7570; ConvF(7.52, 7.52, 7.52) @ 2450 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## **2450 MHz System Verification at 20.0 dBm (100 mW)**


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.2 W/kg

**SAR(1 g) = 5.31 W/kg**

Deviation(1 g) = 0.76%

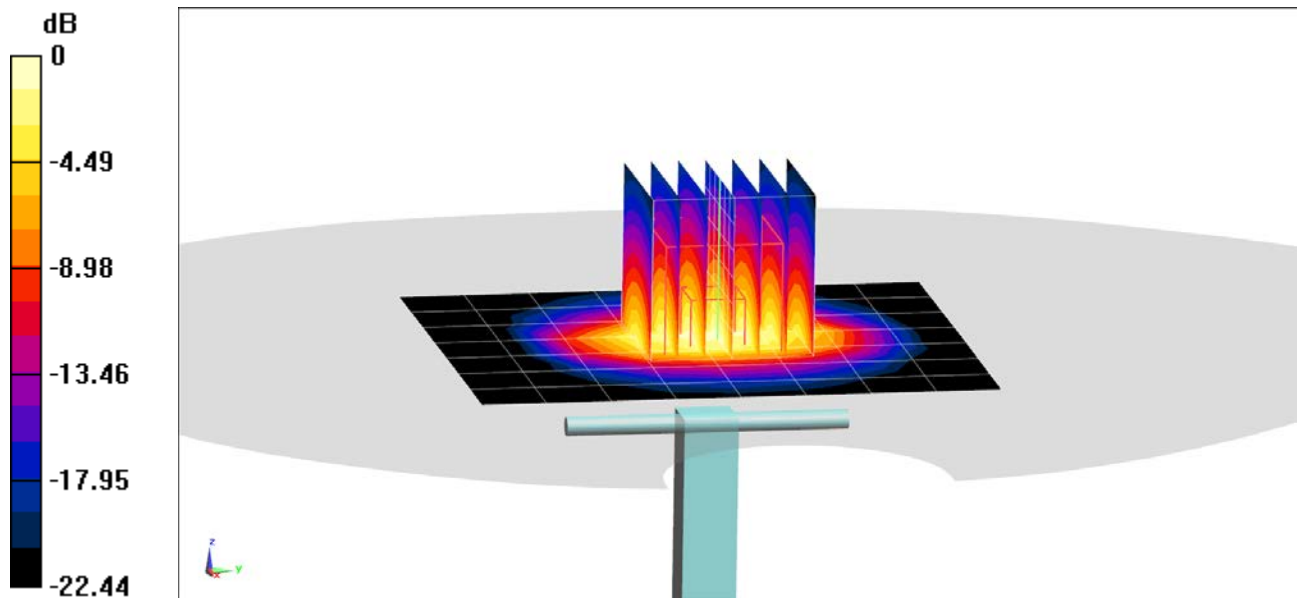

0 dB = 8.99 W/kg = 9.54 dBW/kg

# PCTEST

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1064**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2600 \text{ MHz}$ ;  $\sigma = 1.931 \text{ S/m}$ ;  $\epsilon_r = 37.326$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/17/2020; Ambient Temp: 22.8°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2600 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 2600 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 13.4 W/kg

**SAR(1 g) = 6.07 W/kg**

Deviation(1 g) = 4.48%

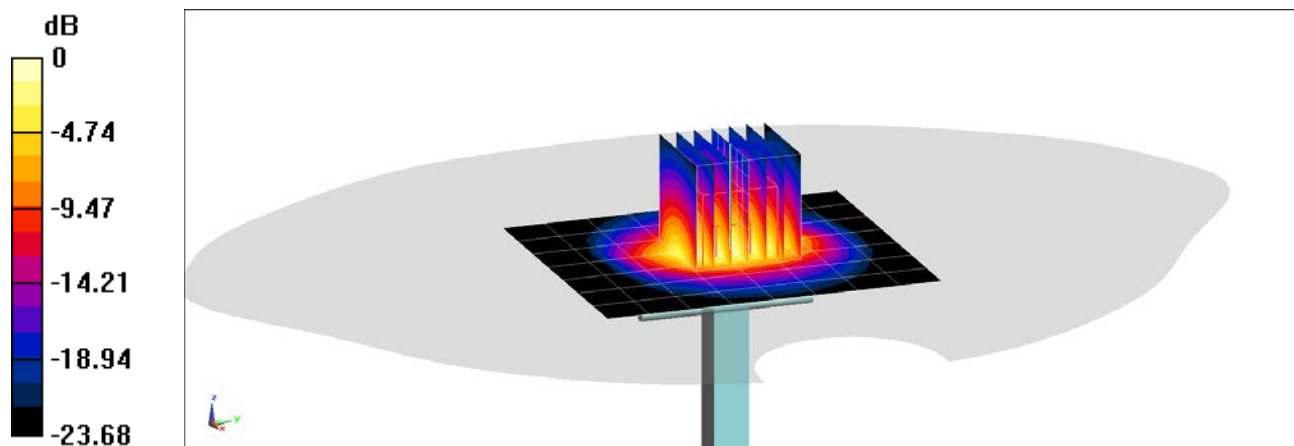

0 dB = 10.6 W/kg = 10.25 dBW/kg

# PCTEST

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head; Medium parameters used:

$f = 5250$  MHz;  $\sigma = 4.713$  S/m;  $\epsilon_r = 36.795$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/14/2020; Ambient Temp: 21.4°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7406; ConvF(5.54, 5.54, 5.54) @ 5250 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Right 20; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 5250 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.8 W/kg

**SAR(1 g) = 3.64 W/kg**

Deviation(1 g) = -8.08%

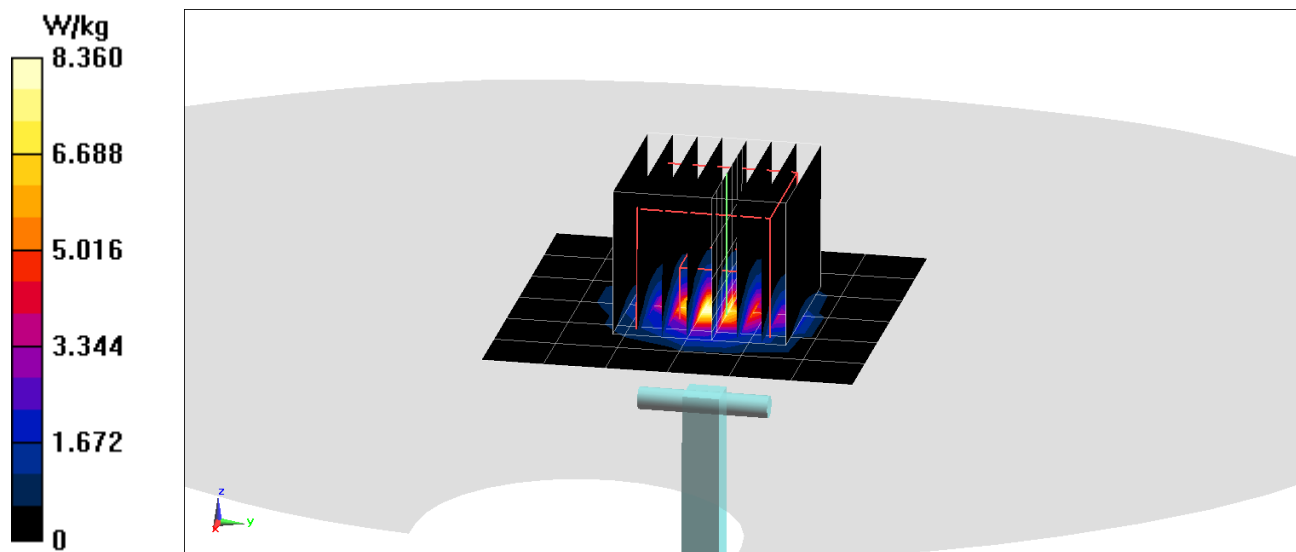

# PCTEST

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head; Medium parameters used:

$f = 5750 \text{ MHz}$ ;  $\sigma = 5.31 \text{ S/m}$ ;  $\epsilon_r = 35.91$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/14/2020; Ambient Temp: 21.4°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7406; ConvF(5.23, 5.23, 5.23) @ 5750 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Right 20; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## **5750 MHz System Verification at 17.0 dBm (50 mW)**


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.3 W/kg

**SAR(1 g) = 3.71 W/kg**

Deviation(1 g) = -7.83%

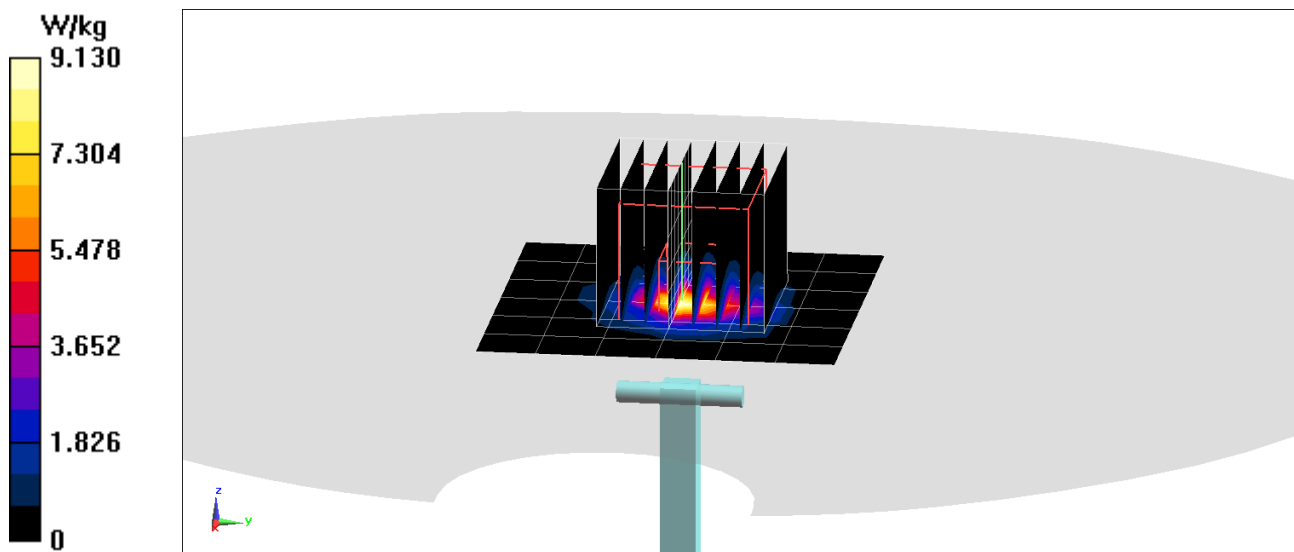

# PCTEST

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used:

$f = 750 \text{ MHz}$ ;  $\sigma = 0.959 \text{ S/m}$ ;  $\epsilon_r = 54.188$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/11/2020; Ambient Temp: 22.0°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7551; ConvF(10.09, 10.09, 10.09) @ 750 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## **750 MHz System Verification at 23.0 dBm (200 mW)**


**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.76 W/kg

**SAR(1 g) = 1.77 W/kg**

Deviation(1 g) = 3.51%

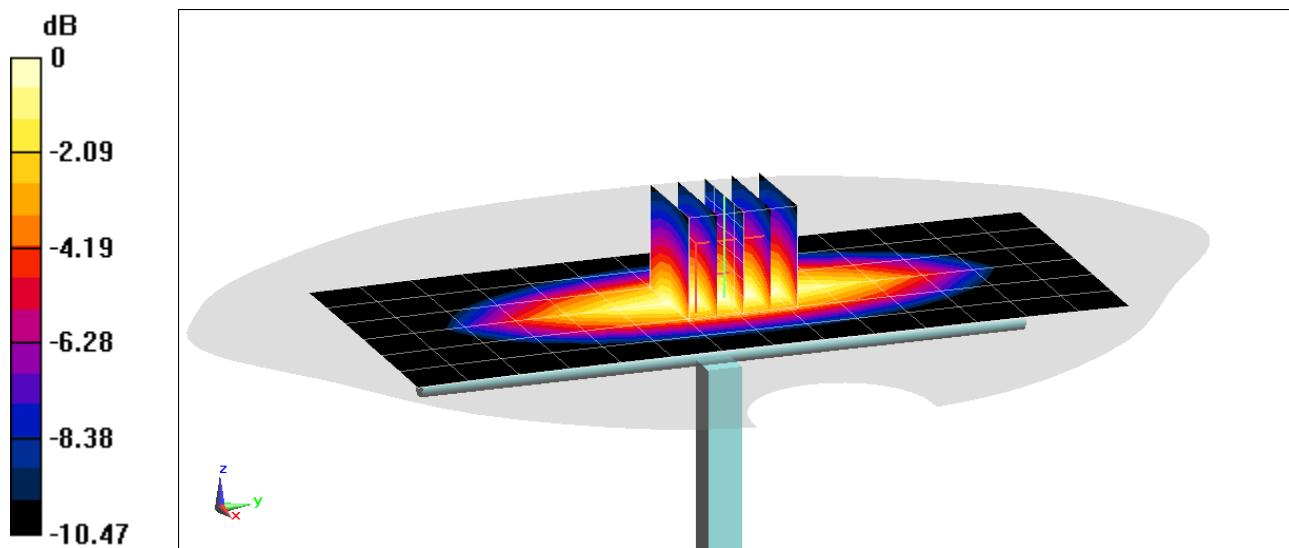

0 dB = 2.40 W/kg = 3.80 dBW/kg



# PCTEST

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used:

$f = 750 \text{ MHz}$ ;  $\sigma = 0.939 \text{ S/m}$ ;  $\epsilon_r = 54.303$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/17/2020; Ambient Temp: 23.9°C; Tissue Temp: 19.4°C

Probe: EX3DV4 - SN7551; ConvF(10.09, 10.09, 10.09) @ 750 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 750 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.65 W/kg

**SAR(1 g) = 1.7 W/kg**

Deviation(1 g) = -0.93%

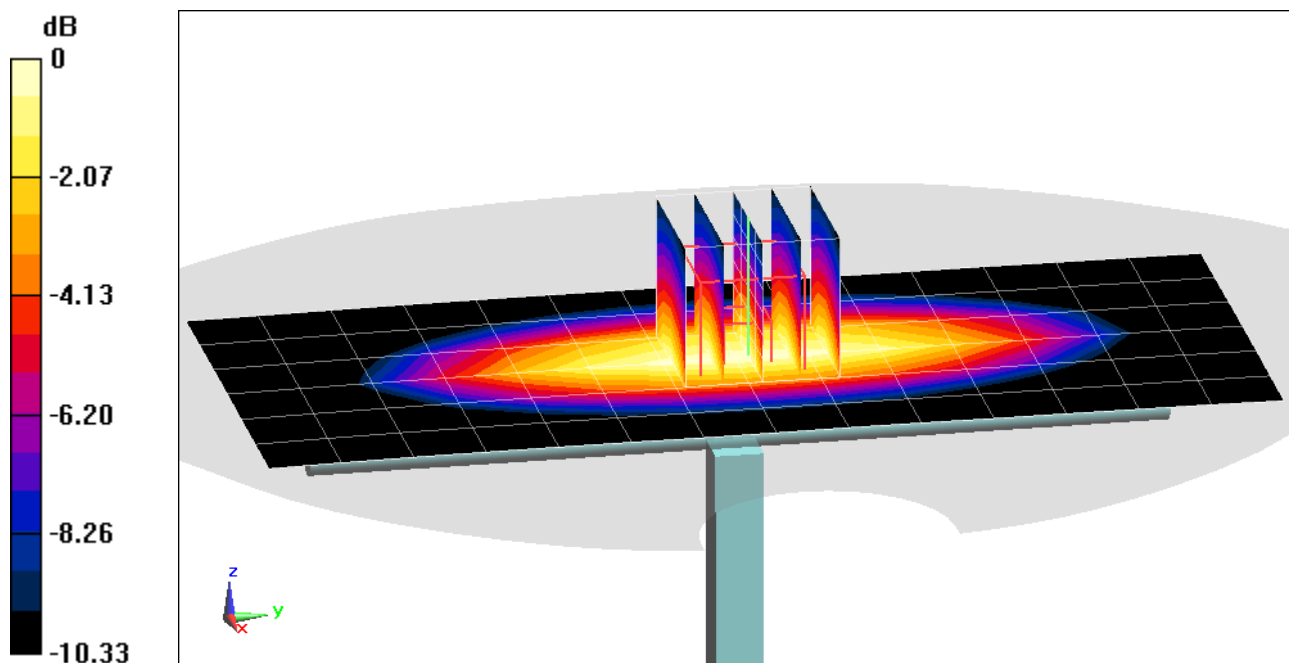

0 dB = 2.30 W/kg = 3.62 dBW/kg

# PCTEST

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used:

$f = 750 \text{ MHz}$ ;  $\sigma = 0.937 \text{ S/m}$ ;  $\epsilon_r = 53.527$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03/09/2020; Ambient Temp: 23.0°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7547; ConvF(9.81, 9.81, 9.81) @ 750 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 750 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.54 W/kg

**SAR(1 g) = 1.69 W/kg**

Deviation(1 g) = 0.24%

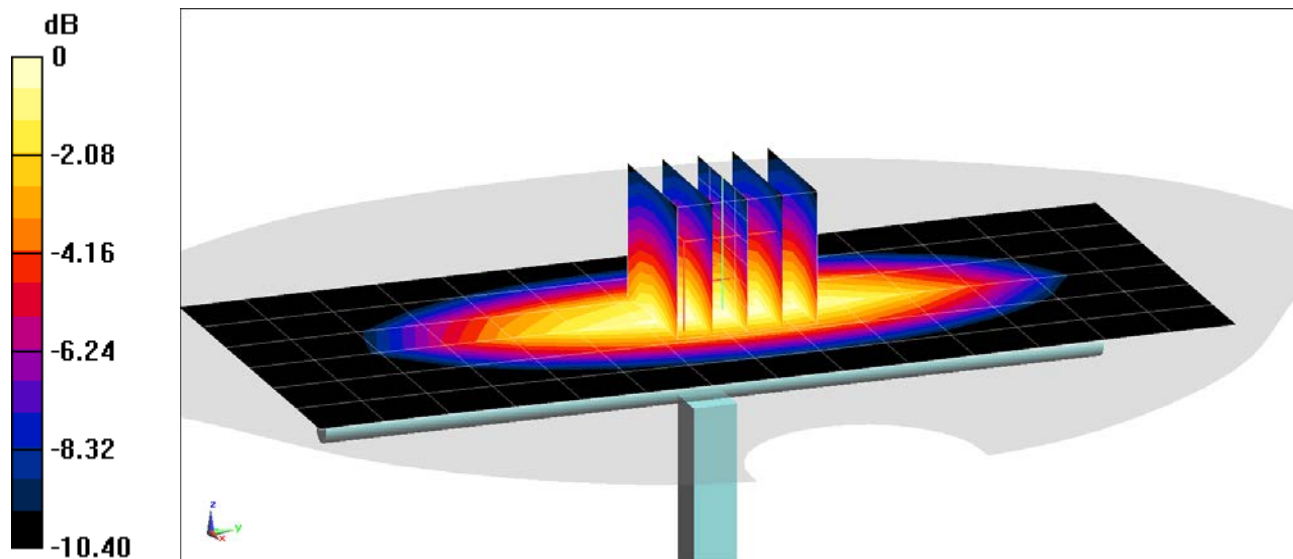

0 dB = 2.26 W/kg = 3.54 dBW/kg

# PCTEST

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.969 \text{ S/m}$ ;  $\epsilon_r = 54.593$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/10/2020; Ambient Temp: 20.1°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 835 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## **835 MHz System Verification at 23.0 dBm (200 mW)**


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 3.16 W/kg

**SAR(1 g) = 2.05 W/kg**

Deviation(1 g) = 2.91%

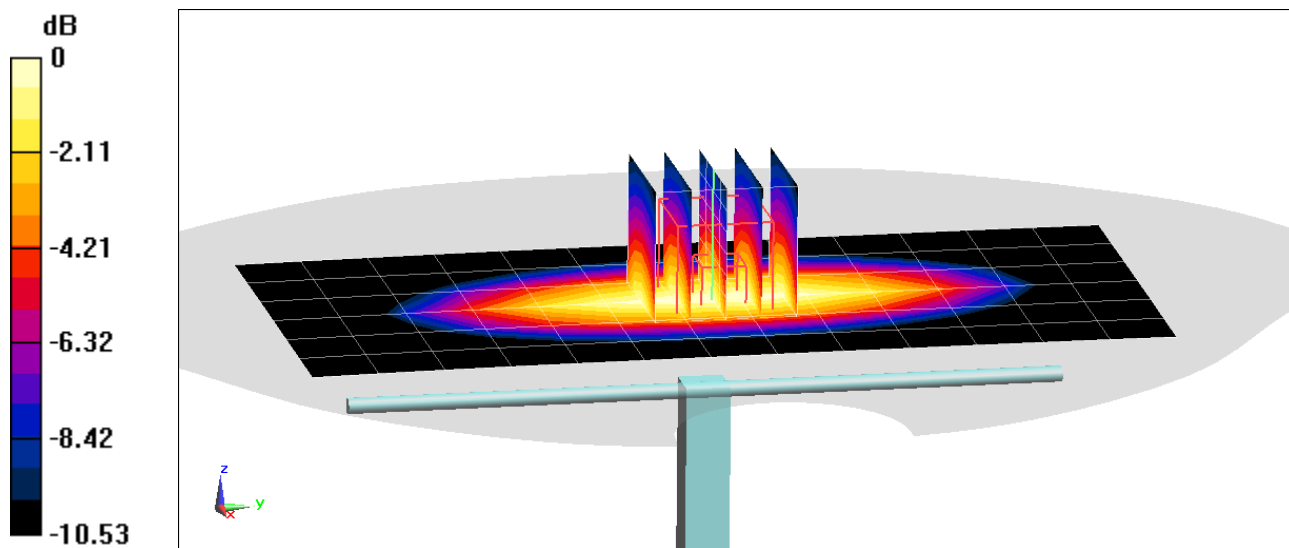

0 dB = 2.76 W/kg = 4.41 dBW/kg

# PCTEST

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.949 \text{ S/m}$ ;  $\epsilon_r = 54.487$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/12/2020; Ambient Temp: 22.7°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7409; ConvF(9.74, 9.74, 9.74) @ 835 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.16 W/kg

**SAR(1 g) = 2.04 W/kg**

Deviation(1 g) = 7.71%

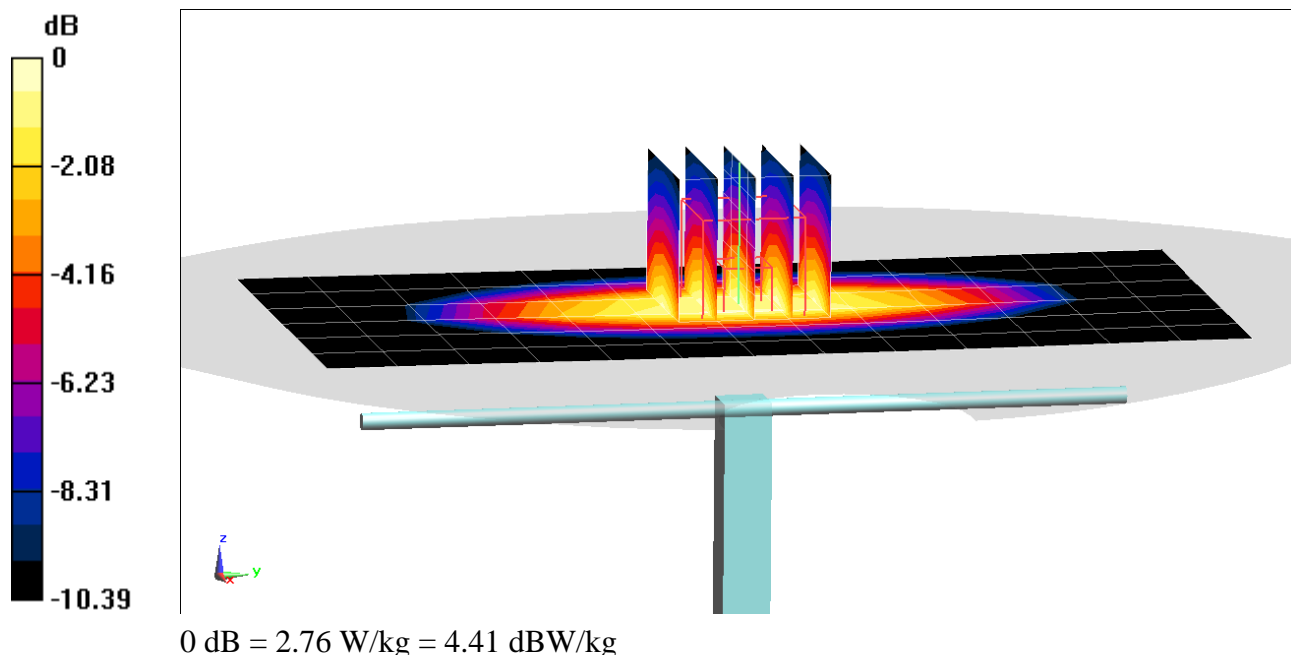

# PCTEST

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.941 \text{ S/m}$ ;  $\epsilon_r = 54.852$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 02/13/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7406; ConvF(9.78, 9.78, 9.78) @ 835 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Right 20; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## **835 MHz System Verification at 23.0 dBm (200 mW)**


**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.08 W/kg

**SAR(1 g) = 2.03 W/kg**

Deviation(1 g) = 7.18%

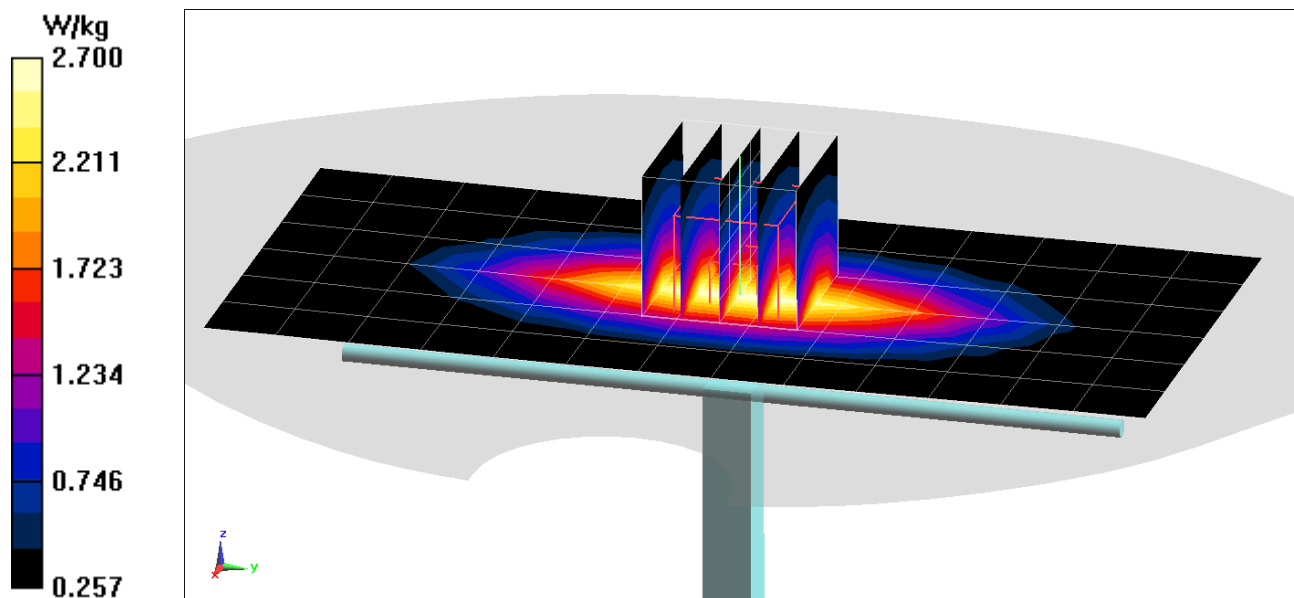

# PCTEST

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.492 \text{ S/m}$ ;  $\epsilon_r = 55.102$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/10/2020; Ambient Temp: 21.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7357; ConvF(8.26, 8.26, 8.26) @ 1750 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.91 W/kg

**SAR(1 g) = 3.81 W/kg**

Deviation(1 g) = 1.06%

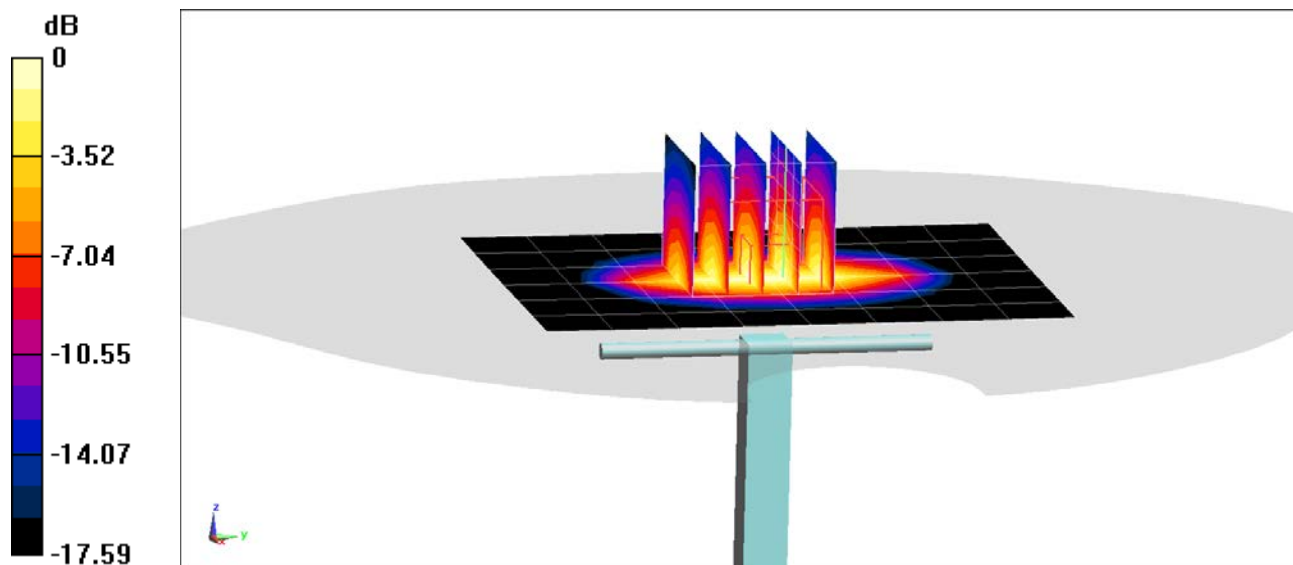

0 dB = 5.73 W/kg = 7.58 dBW/kg

# PCTEST

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.506 \text{ S/m}$ ;  $\epsilon_r = 51.003$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/04/2020; Ambient Temp: 22.7°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7410; ConvF(8.08, 8.08, 8.08) @ 1750 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.01 W/kg

**SAR(1 g) = 3.86 W/kg; SAR(10 g) = 2.04 W/kg**

Deviation(1 g) = 5.46%; Deviation(10 g) = 5.15%

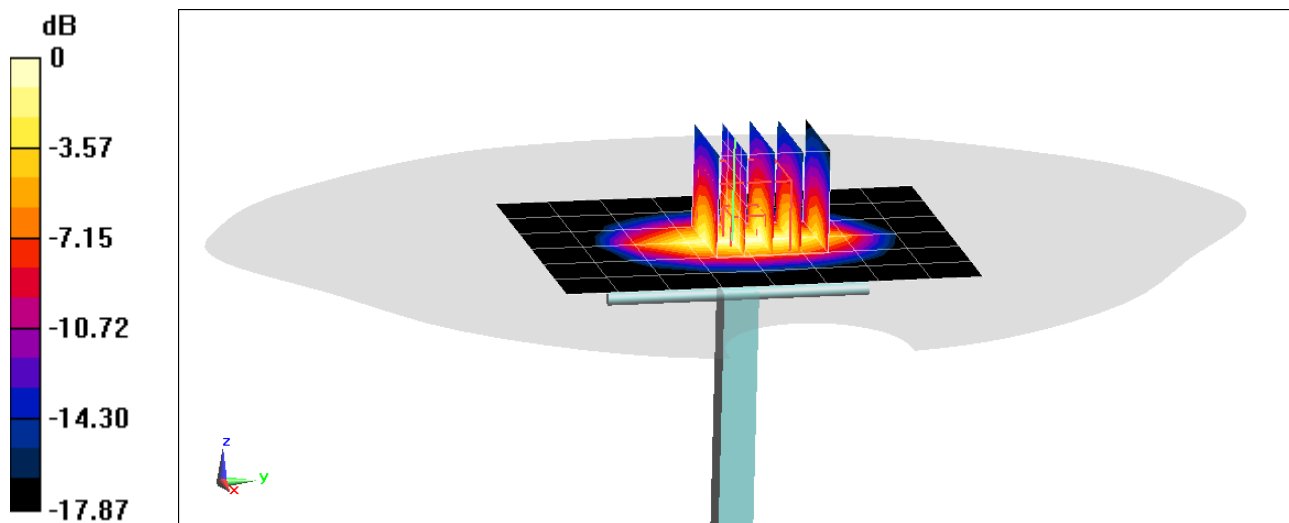

0 dB = 5.83 W/kg = 7.66 dBW/kg

# PCTEST

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.554 \text{ S/m}$ ;  $\epsilon_r = 52.227$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/19/2020; Ambient Temp: 23.5°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7551; ConvF(7.69, 7.69, 7.69) @ 1900 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.59 W/kg

**SAR(1 g) = 4.06 W/kg**

Deviation(1 g) = 3.84%

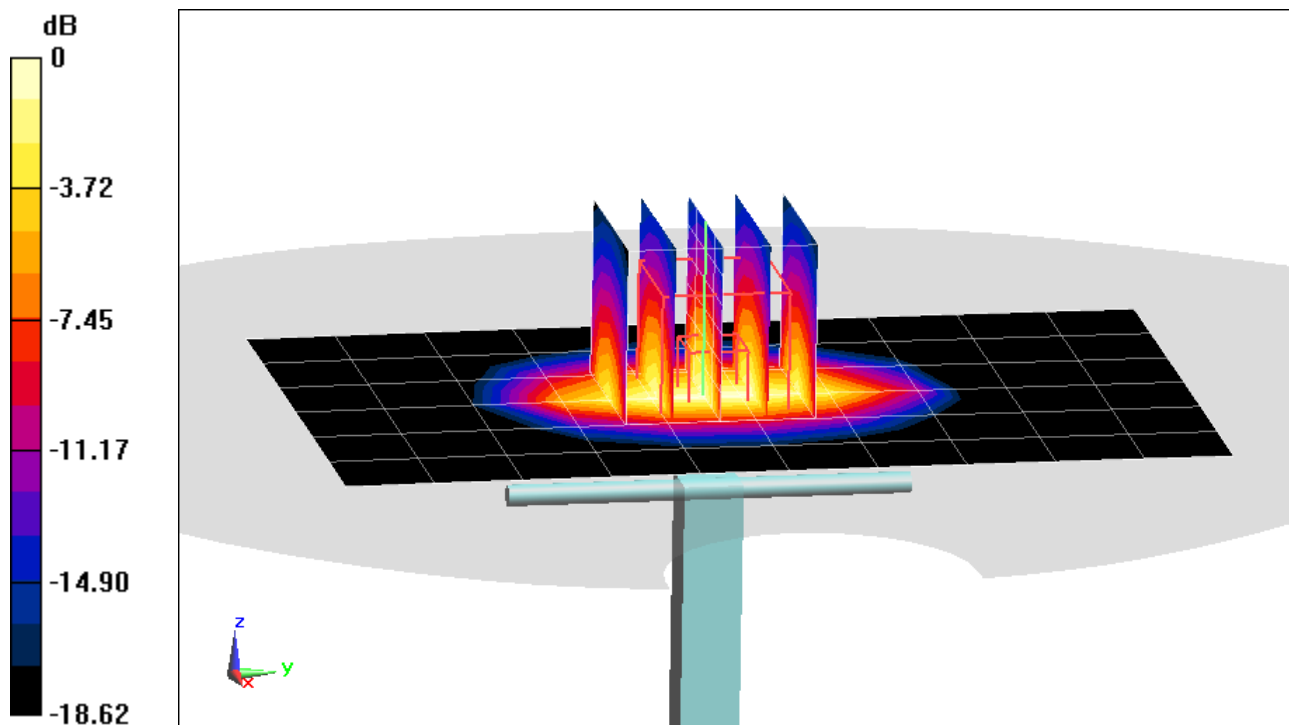

0 dB = 6.37 W/kg = 8.04 dBW/kg



# PCTEST

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.554 \text{ S/m}$ ;  $\epsilon_r = 53.192$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/06/2020; Ambient Temp: 21.7°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1900 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.95 W/kg

**SAR(10 g) = 2.2 W/kg**

Deviation(10 g) = 6.28%

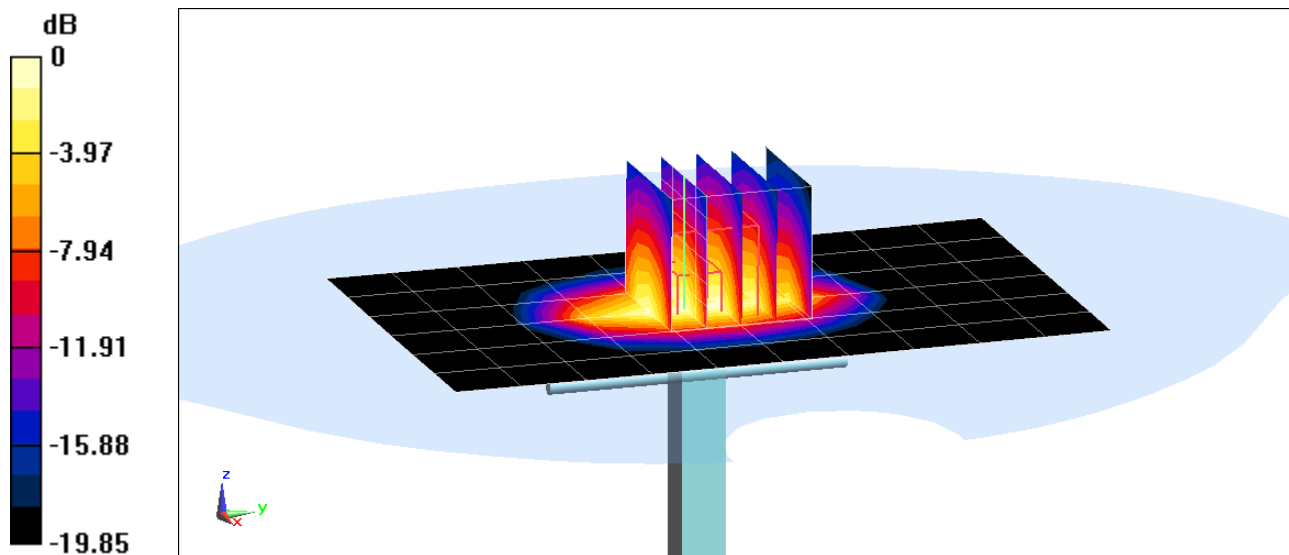

0 dB = 6.52 W/kg = 8.14 dBW/kg

# PCTEST

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.56 \text{ S/m}$ ;  $\epsilon_r = 53.061$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/09/2020; Ambient Temp: 22.7°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1900 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.56 W/kg

**SAR(1 g) = 4.14 W/kg**

Deviation(1 g) = 5.61%

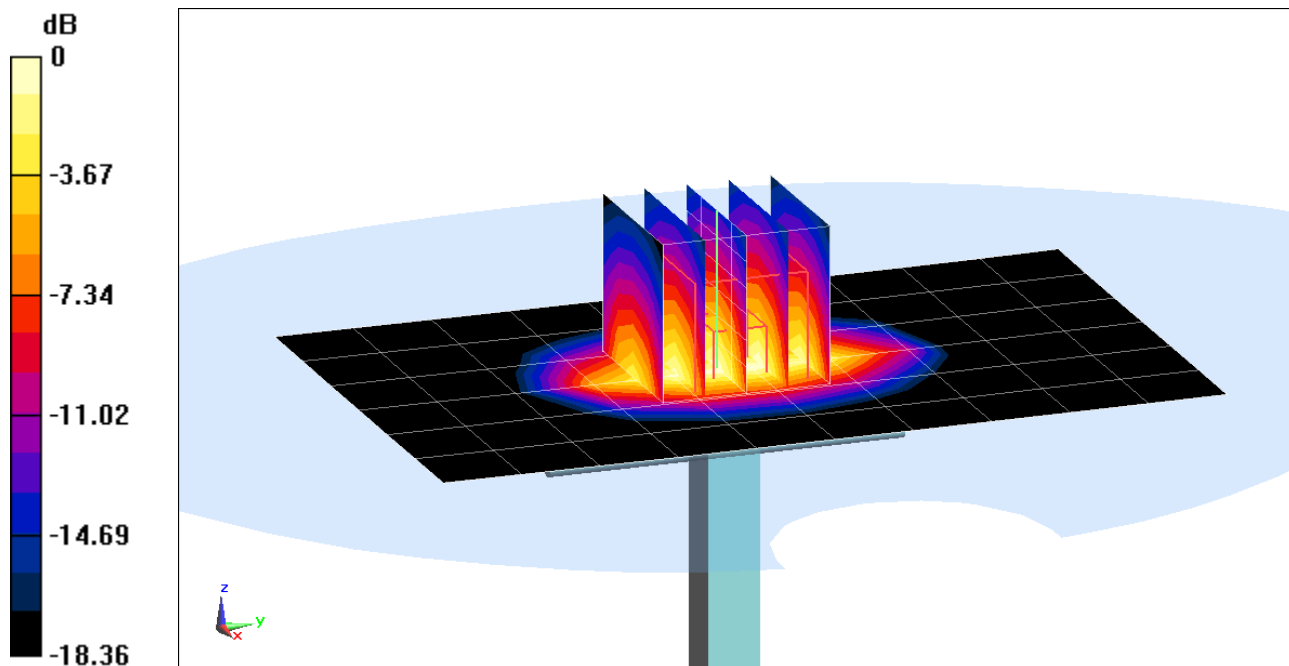

0 dB = 6.35 W/kg = 8.03 dBW/kg

# PCTEST

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.988 \text{ S/m}$ ;  $\epsilon_r = 53.017$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/24/2020; Ambient Temp: 21.9°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF(7.41, 7.41, 7.41) @ 2450 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.9 W/kg

**SAR(1 g) = 5.13 W/kg**

Deviation(1 g) = 0.98%

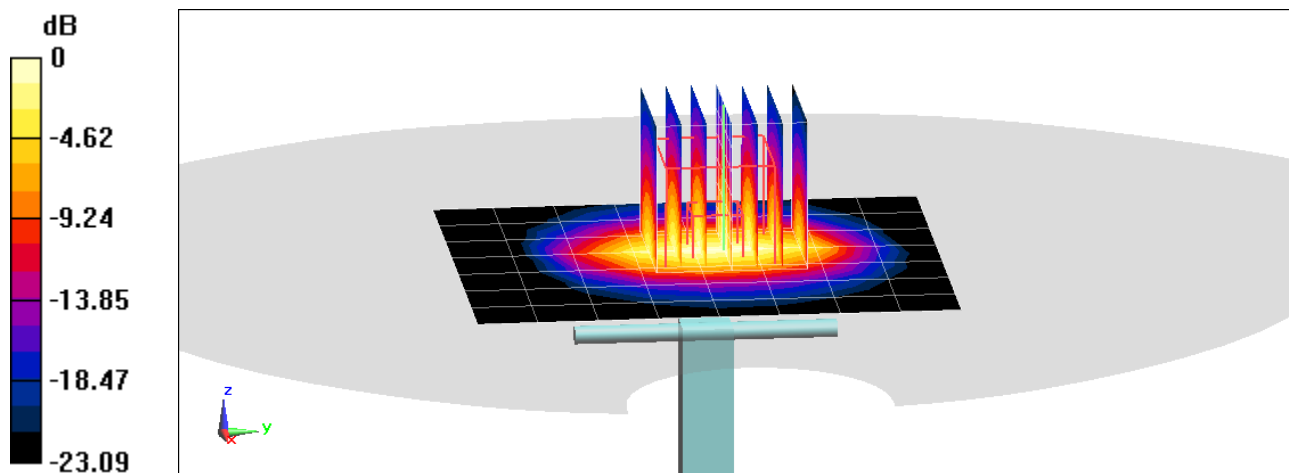

0 dB = 8.70 W/kg = 9.40 dBW/kg

# PCTEST

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 2.032 \text{ S/m}$ ;  $\epsilon_r = 51.738$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/28/2020; Ambient Temp: 23.0°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2450 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.4 W/kg

**SAR(1 g) = 5.07 W/kg**

Deviation(1 g) = -0.78%

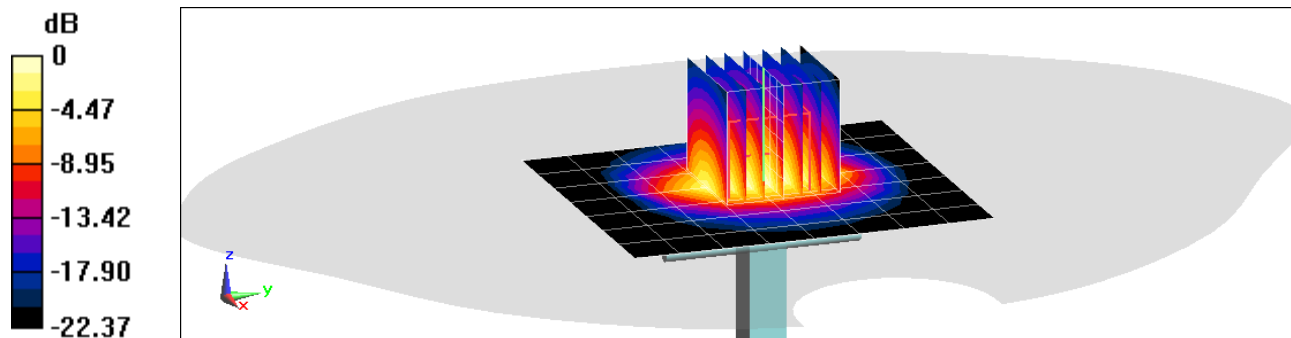

0 dB = 8.36 W/kg = 9.22 dBW/kg

# PCTEST

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 2.014 \text{ S/m}$ ;  $\epsilon_r = 52.082$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/09/2020; Ambient Temp: 20.9°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7357; ConvF(7.59, 7.59, 7.59) @ 2450 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.8 W/kg

**SAR(1 g) = 5.11 W/kg**

Deviation(1 g) = 0.00%

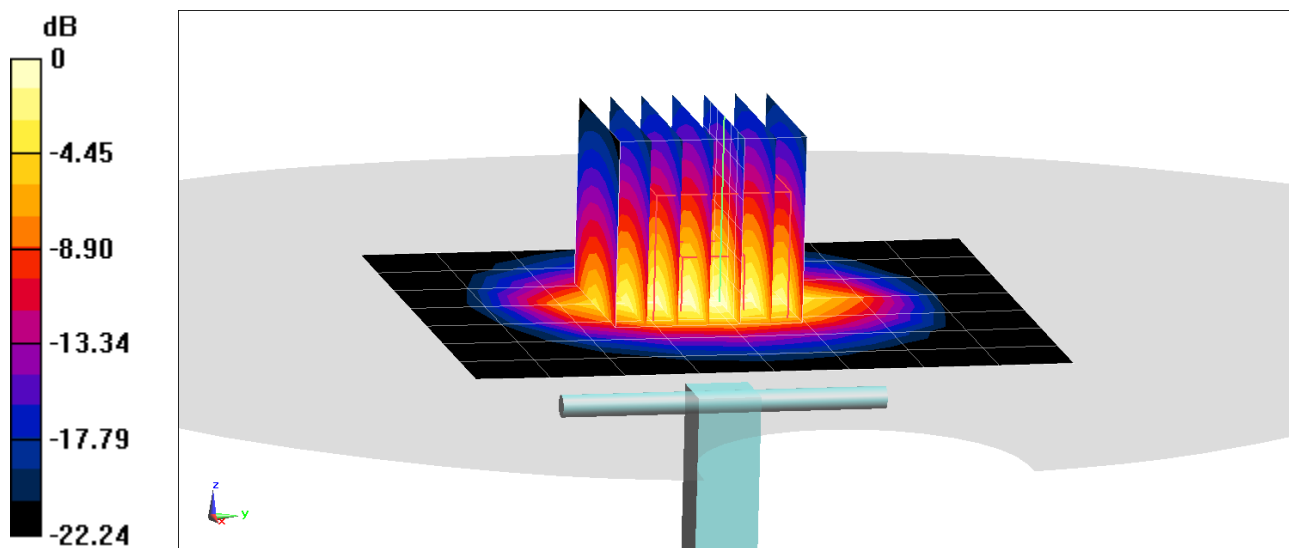

0 dB = 8.58 W/kg = 9.33 dBW/kg

# PCTEST

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.993 \text{ S/m}$ ;  $\epsilon_r = 52.545$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/12/2020; Ambient Temp: 23.0°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7357; ConvF(7.59, 7.59, 7.59) @ 2450 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.8 W/kg

**SAR(1 g) = 5.23 W/kg**

Deviation(1 g) = 2.35%

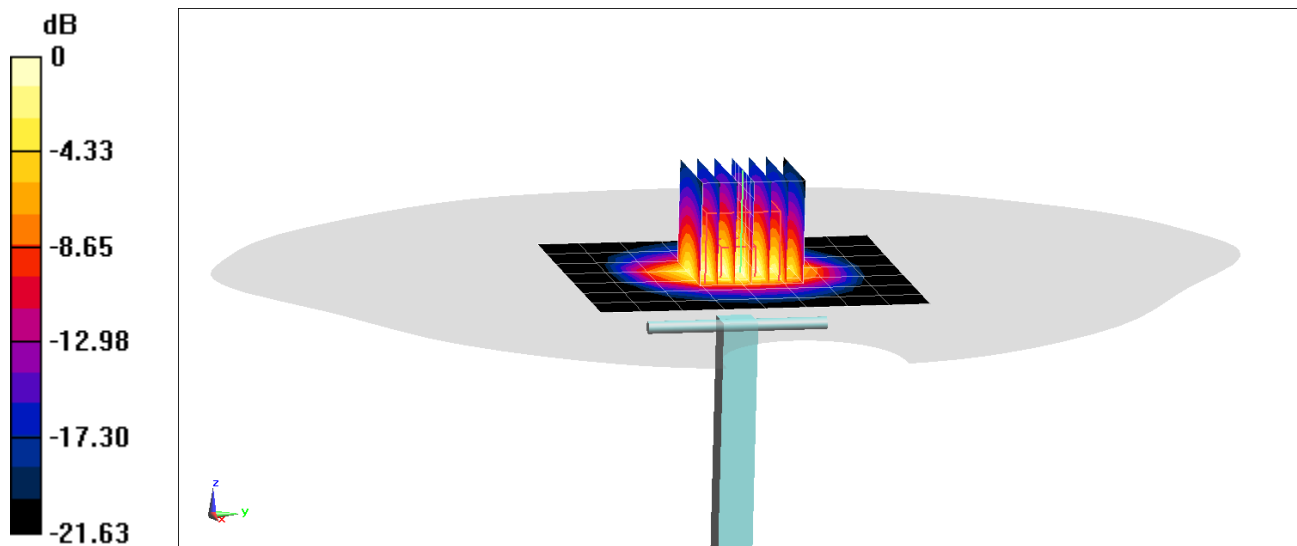

0 dB = 8.69 W/kg = 9.39 dBW/kg

# PCTEST

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$  MHz;  $\sigma = 2.036$  S/m;  $\epsilon_r = 52.194$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/16/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2450 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.4 W/kg

**SAR(10 g) = 2.33 W/kg**

Deviation(10 g) = -3.72%

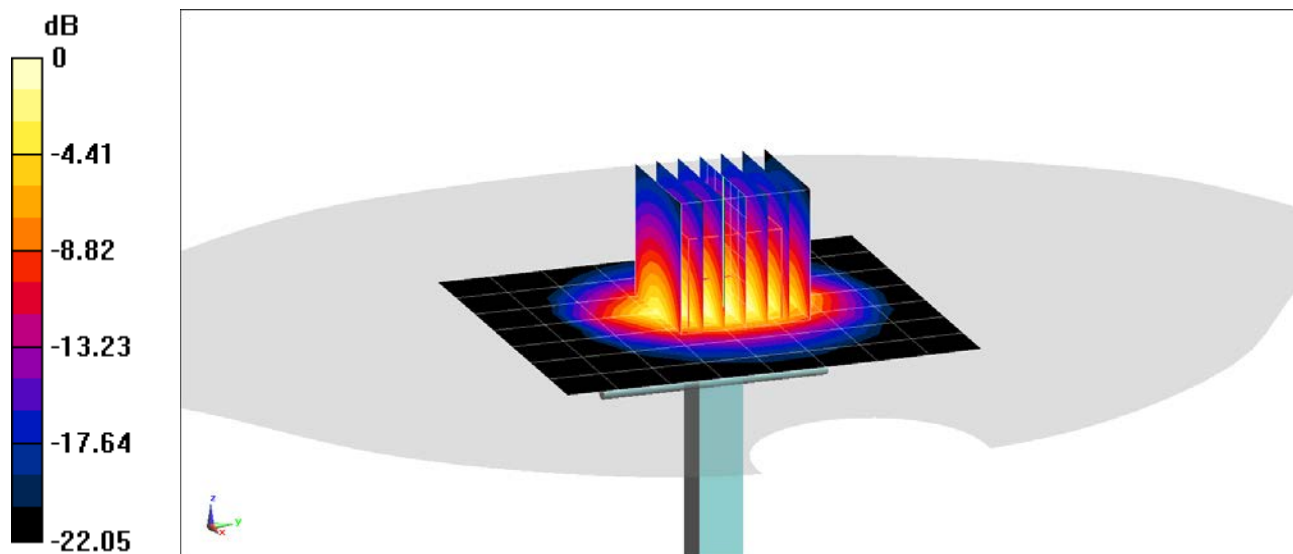

0 dB = 8.36 W/kg = 9.22 dBW/kg

# PCTEST

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600 \text{ MHz}$ ;  $\sigma = 2.224 \text{ S/m}$ ;  $\epsilon_r = 51.535$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/09/2020; Ambient Temp: 20.9°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7357; ConvF(7.39, 7.39, 7.39) @ 2600 MHz; Calibrated: 4/24/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/18/2019

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

## 2600 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 12.8 W/kg

**SAR(1 g) = 5.7 W/kg**

Deviation(1 g) = 4.01%

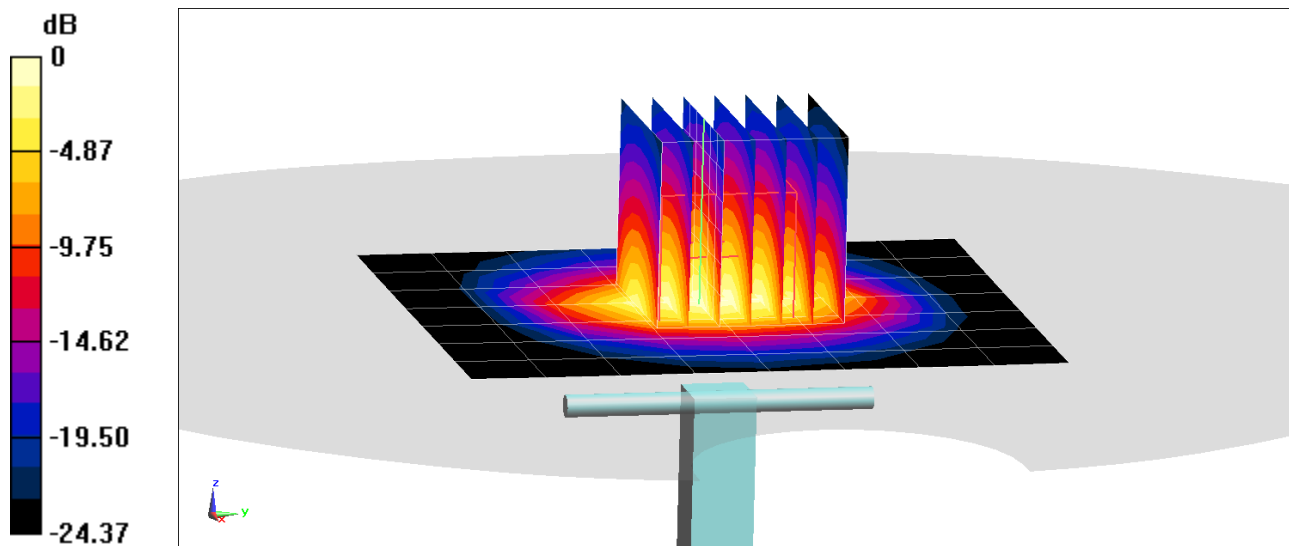



# PCTEST

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600$  MHz;  $\sigma = 2.219$  S/m;  $\epsilon_r = 51.753$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/16/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7547; ConvF(7.18, 7.18, 7.18) @ 2600 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 2600 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.3 W/kg

**SAR(10 g) = 2.35 W/kg**

Deviation(10 g) = -4.86%

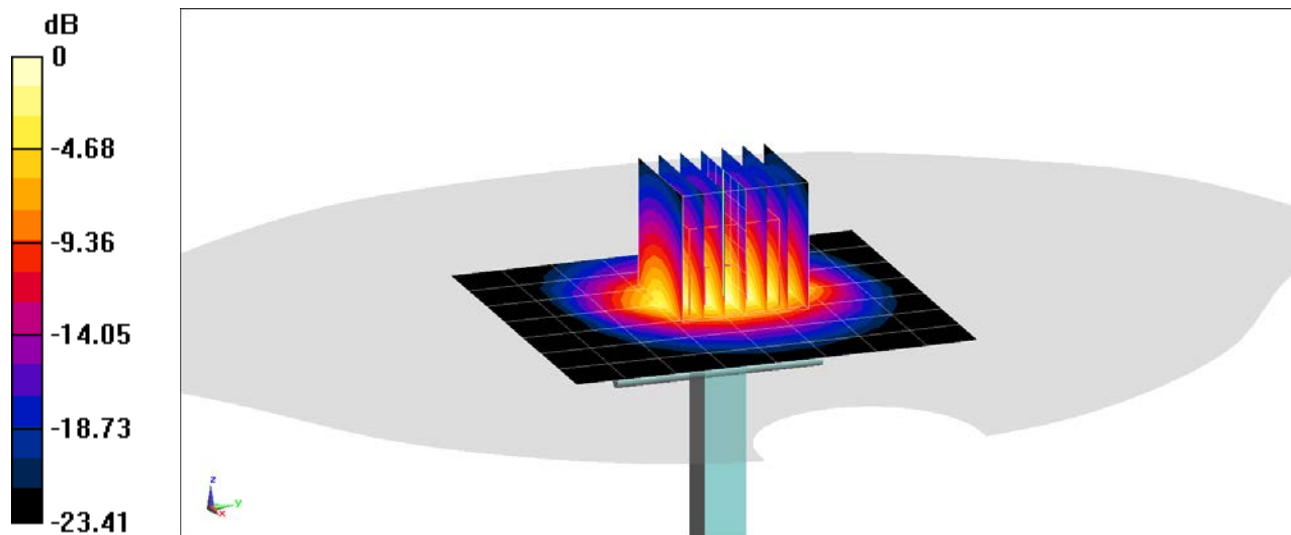

0 dB = 9.06 W/kg = 9.57 dBW/kg

# PCTEST

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5250$  MHz;  $\sigma = 5.501$  S/m;  $\epsilon_r = 47.219$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/24/2020; Ambient Temp: 23.7°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7409; ConvF(4.7, 4.7, 4.7) @ 5250 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 5250 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.2 W/kg

**SAR(1 g) = 3.79 W/kg; SAR(10 g) = 1.06 W/kg**

Deviation(1 g) = -0.13%; Deviation(10 g) = 0.47%

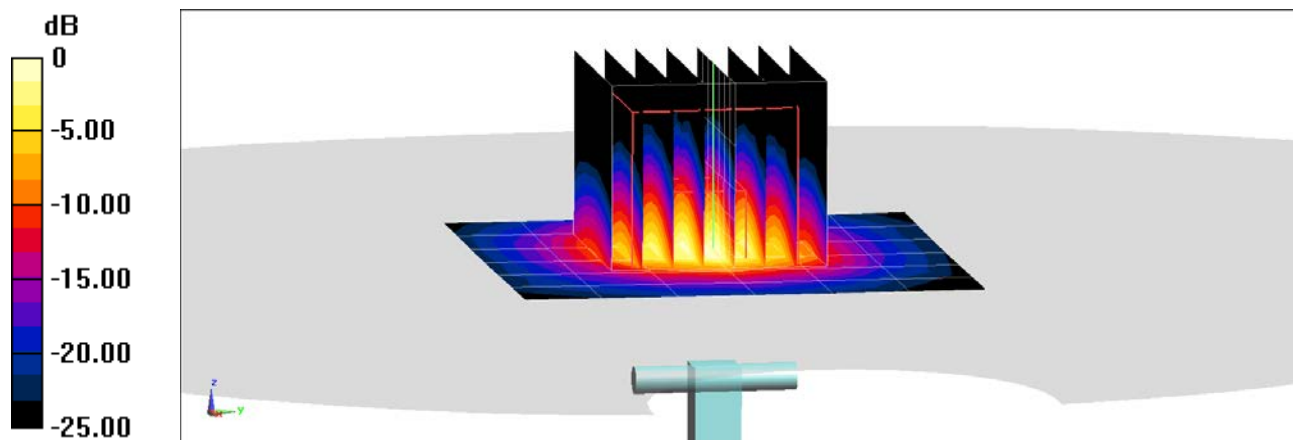

0 dB = 8.99 W/kg = 9.54 dBW/kg

# PCTEST

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5600$  MHz;  $\sigma = 5.976$  S/m;  $\epsilon_r = 46.635$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/24/2020; Ambient Temp: 23.7°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7409; ConvF(4.22, 4.22, 4.22) @ 5600 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## **5600 MHz System Verification at 17.0 dBm (50 mW)**


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.9 W/kg

**SAR(1 g) = 4.01 W/kg; SAR(10 g) = 1.11 W/kg**

Deviation(1 g) = 0.38%; Deviation(10 g) = -0.45%

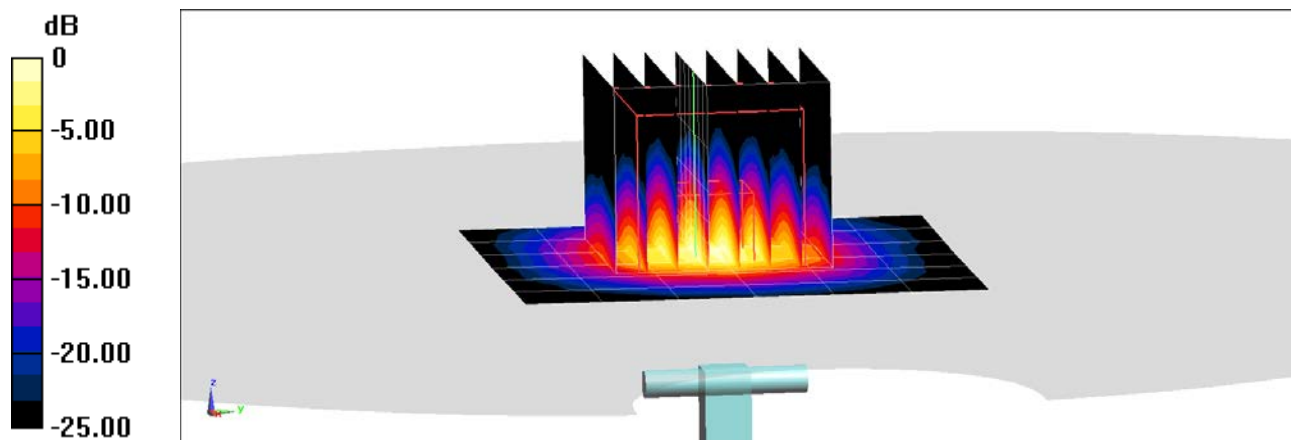

0 dB = 9.79 W/kg = 9.91 dBW/kg

# PCTEST

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1057**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5750$  MHz;  $\sigma = 6.183$  S/m;  $\epsilon_r = 46.403$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02/24/2020; Ambient Temp: 23.7°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7409; ConvF(4.23, 4.23, 4.23) @ 5750 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## **5750 MHz System Verification at 17.0 dBm (50 mW)**


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.6 W/kg

**SAR(1 g) = 3.76 W/kg; SAR(10 g) = 1.03 W/kg**

Deviation(1 g) = -1.96%; Deviation(10 g) = -2.83%

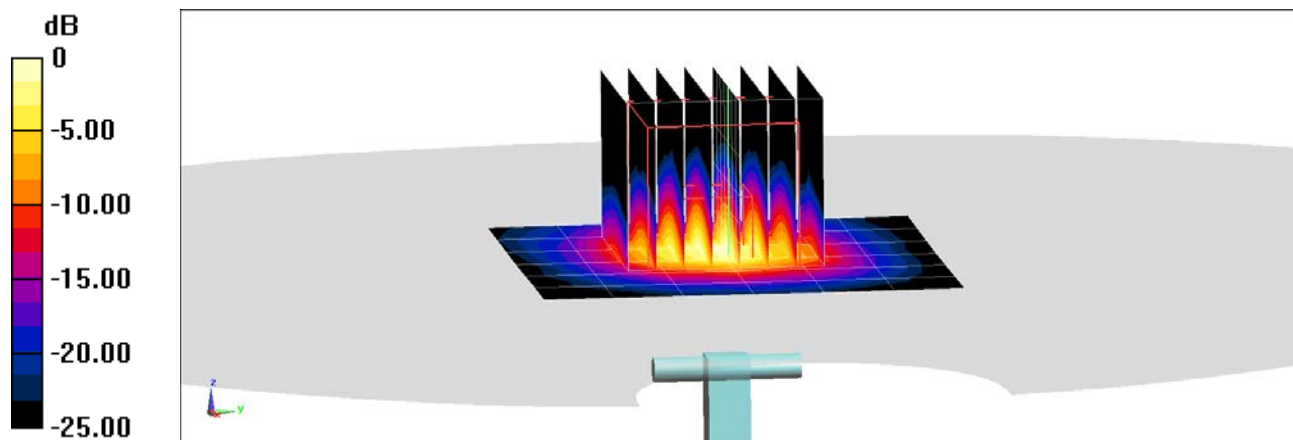

0 dB = 9.23 W/kg = 9.65 dBW/kg

# PCTEST

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body Medium parameters used:

$f = 5750 \text{ MHz}$ ;  $\sigma = 6.21 \text{ S/m}$ ;  $\epsilon_r = 46.477$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03/17/2020; Ambient Temp: 22.8°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7409; ConvF(4.23, 4.23, 4.23) @ 5750 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

## 5750 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.1 W/kg

**SAR(1 g) = 3.74 W/kg**

Deviation(1 g) = -1.45%

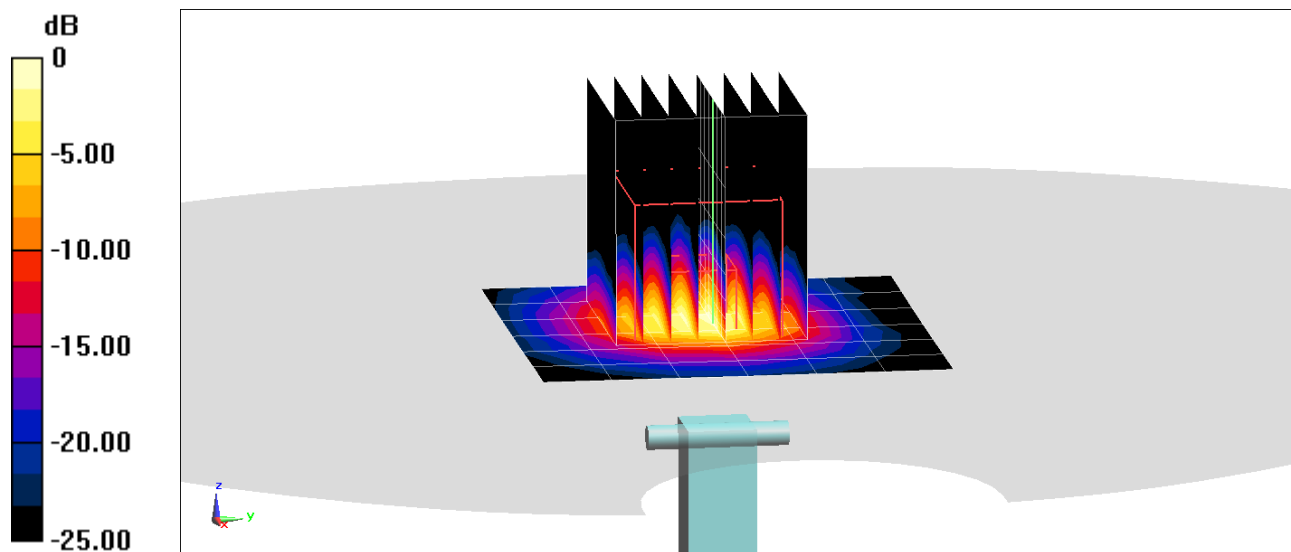

0 dB = 9.38 W/kg = 9.72 dBW/kg

## APPENDIX C: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity  $\epsilon'$  can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where  $Y$  is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively,  $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$ ,  $\omega$  is the angular frequency, and  $j = \sqrt{-1}$ .

### 3 Composition / Information on ingredients

#### 3.2 Mixtures

**Description:** Aqueous solution with surfactants and inhibitors

**Declarable, or hazardous components:**



CAS: 107-21-1 EINECS: 203-473-3 Reg.nr.: 01-2119456816-28-0000	<b>Ethanediol</b> STOT RE 2, H373; Acute Tox. 4, H302	>1.0-4.9%
CAS: 68608-26-4 EINECS: 271-781-5 Reg.nr.: 01-2119527859-22-0000	<b>Sodium petroleum sulfonate</b> Eye Irrit. 2, H319	< 2.9%
CAS: 107-41-5 EINECS: 203-489-0 Reg.nr.: 01-2119539582-35-0000	<b>Hexylene Glycol / 2-Methyl-pentane-2,4-diol</b> Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.9%
CAS: 68920-66-1 NLP: 500-236-9 Reg.nr.: 01-2119489407-26-0000	<b>Alkoxylated alcohol, &gt; C<sub>16</sub></b> Aquatic Chronic 2, H411; Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.0%

**Additional information:**

For the wording of the listed risk phrases refer to section 16.  
Not mentioned CAS-, EINECS- or registration numbers are to be regarded as Proprietary/Confidential.  
The specific chemical identity and/or exact percentage concentration of proprietary components is withheld as a trade secret.

**Figure C-1**

Note: Liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

<b>FCC ID:</b> A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset			<b>APPENDIX C:</b> Page 1 of 3

## Measurement Certificate / Material Test

Item Name **Body Tissue Simulating Liquid (MBBL600-6000V6)**  
 Product No. **SL AAM U16 BC (Batch: 181029-1)**  
 Manufacturer **SPEAG**

## Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

## Target Parameters

Target parameters as defined in the KDB 865664 compliance standard.

## Test Condition



Ambient Condition **22°C ; 30% humidity**  
 TSL Temperature **22°C**  
 Test Date **30-Oct-18**  
 Operator **CL**

## Additional Information

TSL Density  
 TSL Heat-capacity

## Results

f [MHz]	Measured			Target		Diff. to Target [%]	
	e'	e''	sigma	eps	sigma	Δ-eps	Δ-sigma
800	55.1	21.3	0.95	55.3	0.97	-0.4	-2.1
825	55.1	20.8	0.98	55.2	0.98	-0.3	-2.0
835	55.1	20.6	0.98	55.1	0.99	0.0	-2.5
850	55.1	20.4	0.98	55.2	0.99	-0.1	-3.0
900	55.0	19.7	0.98	55.0	1.05	0.0	-6.7
1400	54.2	15.6	1.22	54.1	1.28	0.2	-4.7
1450	54.1	15.4	1.24	54.0	1.30	0.2	-4.5
1500	54.1	15.3	1.27	53.9	1.33	0.3	-4.5
1550	54.0	15.1	1.30	53.9	1.36	0.2	-4.4
1600	53.9	15.0	1.33	53.8	1.39	0.2	-4.3
1625	53.9	14.9	1.35	53.8	1.41	0.3	-4.3
1640	53.9	14.9	1.36	53.7	1.42	0.3	-4.2
1650	53.8	14.9	1.36	53.7	1.43	0.2	-4.9
1700	53.8	14.8	1.40	53.6	1.46	0.4	-4.1
1750	53.7	14.7	1.43	53.4	1.49	0.5	-4.0
1800	53.7	14.6	1.46	53.3	1.52	0.8	-3.9
1810	53.7	14.6	1.47	53.3	1.52	0.8	-3.3
1825	53.7	14.6	1.48	53.3	1.52	0.8	-2.6
1850	53.6	14.5	1.50	53.3	1.52	0.6	-1.3
1900	53.5	14.5	1.53	53.3	1.52	0.4	0.7
1950	53.5	14.5	1.57	53.3	1.52	0.4	3.3
2000	53.4	14.4	1.60	53.3	1.52	0.2	5.3
2050	53.4	14.4	1.64	53.2	1.57	0.3	4.5
2100	53.3	14.4	1.68	53.2	1.62	0.2	3.7
2150	53.3	14.4	1.72	53.1	1.66	0.4	3.6
2200	53.2	14.4	1.76	53.0	1.71	0.3	2.9
2250	53.1	14.4	1.81	53.0	1.76	0.2	2.8
2300	53.1	14.4	1.85	52.9	1.81	0.4	2.2
2350	53.0	14.5	1.89	52.8	1.85	0.3	2.2
2400	52.9	14.5	1.94	52.8	1.90	0.2	2.1
2450	52.9	14.5	1.98	52.7	1.95	0.4	1.5
2500	52.8	14.6	2.03	52.6	2.02	0.3	0.5
2550	52.7	14.6	2.07	52.6	2.09	0.2	-1.0
2600	52.6	14.7	2.12	52.5	2.16	0.2	-1.9

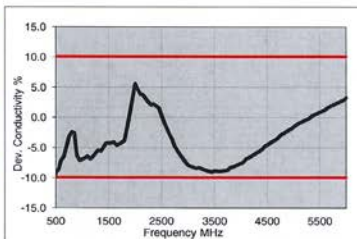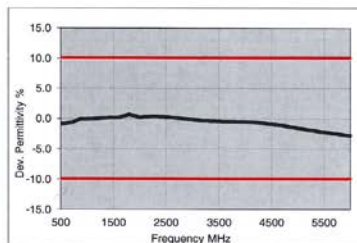



3500	51.1	15.5	3.02	51.3	3.31	-0.4	-8.8
3700	50.8	15.7	3.24	51.1	3.55	-0.5	-8.8
5200	48.1	18.2	5.27	49.0	5.30	-1.8	-0.6
5250	48.0	18.3	5.34	49.0	5.36	-1.9	-0.4
5300	47.9	18.4	5.41	48.9	5.42	-2.0	-0.2
5500	47.5	18.6	5.70	48.6	5.65	-2.2	0.8
5600	47.3	18.8	5.84	48.5	5.77	-2.3	1.3
5700	47.1	18.9	5.99	48.3	5.88	-2.5	1.8
5800	47.0	19.0	6.14	48.2	6.00	-2.6	2.3

TSL Dielectric Parameters

1

Figure C-2  
 600 – 5800 MHz Body Tissue Equivalent Matter

FCC ID: A3LSMG986JPN	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset			APPENDIX C: Page 2 of 3



## Measurement Certificate / Material Test

Item Name **Head Tissue Simulating Liquid (HBBL600-10000V6)**  
Product No. **SL AAH U16 BC (Batch: 181031-2)**  
Manufacturer **SPEAG**

## Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

## Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

## Test Condition



Ambient Condition **22°C ; 30% humidity**  
TSL Temperature **22°C**  
Test Date **31-Oct-18**  
Operator **CL**

## Additional Information

TSL Density  
TSL Heat-capacity



## Results

f [MHz]	Measured			Target		Diff.to Target [%]	
	e'	e''	sigma	eps	sigma	Δ-eps	Δ-sigma
800	43.8	20.5	0.91	41.7	0.90	5.1	1.4
825	43.8	20.1	0.92	41.6	0.91	5.3	1.5
835	43.8	19.9	0.93	41.5	0.91	5.4	2.0
850	43.7	19.7	0.93	41.5	0.92	5.3	1.5
900	43.5	18.9	0.95	41.5	0.97	4.8	-2.1
1400	42.5	15.0	1.17	40.6	1.18	4.7	-0.8
1450	42.5	14.8	1.19	40.5	1.20	4.9	-0.8
1600	42.2	14.3	1.27	40.3	1.28	4.7	-1.1
1625	42.2	14.2	1.29	40.3	1.30	4.8	-0.7
1640	42.2	14.2	1.30	40.3	1.31	4.8	-0.5
1650	42.1	14.2	1.30	40.2	1.31	4.6	-1.0
1700	42.1	14.0	1.33	40.2	1.34	4.8	-0.9
1750	42.0	13.9	1.36	40.1	1.37	4.8	-0.8
1800	41.9	13.9	1.39	40.0	1.40	4.7	-0.7
1810	41.9	13.8	1.40	40.0	1.40	4.7	0.0
1825	41.9	13.8	1.41	40.0	1.40	4.7	0.7
1850	41.8	13.8	1.42	40.0	1.40	4.5	1.4
1900	41.8	13.7	1.45	40.0	1.40	4.5	3.6
1950	41.7	13.7	1.48	40.0	1.40	4.3	5.7
2000	41.6	13.6	1.51	40.0	1.40	4.0	7.9
2050	41.6	13.6	1.55	39.9	1.44	4.2	7.3
2100	41.5	13.5	1.58	39.8	1.49	4.2	6.1
2150	41.4	13.5	1.62	39.7	1.53	4.2	5.7
2200	41.4	13.5	1.65	39.6	1.58	4.4	4.6
2250	41.3	13.5	1.69	39.6	1.62	4.4	4.2
2300	41.2	13.5	1.72	39.5	1.67	4.4	3.2
2350	41.1	13.5	1.76	39.4	1.71	4.4	2.9
2400	41.1	13.5	1.80	39.3	1.76	4.6	2.5
2450	41.0	13.5	1.84	39.2	1.80	4.6	2.2
2500	40.9	13.5	1.88	39.1	1.85	4.5	1.4
2550	40.8	13.5	1.92	39.1	1.91	4.4	0.6
2600	40.8	13.6	1.96	39.0	1.96	4.6	-0.2
3500	39.2	14.1	2.74	37.9	2.91	3.3	-5.8
3700	38.9	14.2	2.93	37.7	3.12	3.1	-6.1



5200	36.3	15.8	4.57	36.0	4.66	0.9	-1.7
5250	36.2	15.9	4.63	35.9	4.71	0.8	-1.6
5300	36.1	15.9	4.69	35.9	4.76	0.7	-1.4
5500	35.8	16.1	4.92	35.6	4.96	0.3	-0.9
5600	35.6	16.2	5.04	35.5	5.07	0.1	-0.6
5700	35.4	16.2	5.15	35.4	5.17	0.0	-0.3
5800	35.2	16.3	5.27	35.3	5.27	-0.2	0.0
6000	34.9	16.5	5.50	35.1	5.48	-0.6	0.5
6500	34.0	16.9	6.12	34.5	6.07	-1.4	0.9
7000	33.1	17.3	6.74	33.9	6.65	-2.3	1.3
7500	32.2	17.6	7.36	33.3	7.24	-3.2	1.6
8000	31.4	17.9	7.97	32.7	7.84	-4.1	1.7
8500	30.5	18.2	8.59	32.1	8.45	-5.0	1.6
9000	29.7	18.4	9.20	31.5	9.08	-5.9	1.3
9500	28.9	18.5	9.80	31.0	9.71	-6.8	0.9
10000	28.1	18.7	10.40	30.4	10.36	-7.6	0.4

Figure C-3  
600 – 5800 MHz Head Tissue Equivalent Matter

FCC ID: A3LSMG986JPN	 Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset			APPENDIX C: Page 3 of 3



## APPENDIX D: SAR SYSTEM VALIDATION

Per FCC KDB Publication 865664 D02v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.



**Table D-1**  
**SAR System Validation Summary – 1g**

SAR SYSTEM #	FREQ. [MHz]	DATE	PROBE SN	PROBE CAL. POINT	COND.	PERM.	CW VALIDATION			MOD. VALIDATION		
					( $\sigma$ )	( $\epsilon_r$ )	SENSITIVITY	PROBE LINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR
L	750	9/24/2019	7410	750	Head	0.878	42.471	PASS	PASS	PASS	N/A	N/A
L	835	9/24/2019	7410	835	Head	0.911	42.199	PASS	PASS	PASS	PASS	N/A
L	1750	9/24/2019	7410	1750	Head	1.351	40.190	PASS	PASS	PASS	N/A	N/A
L	1900	9/24/2019	7410	1900	Head	1.442	39.947	PASS	PASS	PASS	PASS	N/A
M	2450	2/17/2020	7570	2450	Head	1.837	38.340	PASS	PASS	PASS	OFDM/TDD	PASS
E	2600	2/5/2020	3589	2600	Head	1.933	38.635	PASS	PASS	PASS	TDD	PASS
H	5250	12/7/2019	7406	5250	Head	4.709	35.885	PASS	PASS	PASS	OFDM	N/A
H	5750	12/7/2019	7406	5750	Head	5.309	34.961	PASS	PASS	PASS	OFDM	N/A
P	750	9/26/2019	7551	750	Body	0.959	54.287	PASS	PASS	PASS	N/A	N/A
K	750	9/13/2019	7547	750	Body	0.961	55.740	PASS	PASS	PASS	N/A	N/A
P	835	9/26/2019	7551	835	Body	0.991	54.104	PASS	PASS	PASS	PASS	N/A
G	835	8/15/2019	7409	835	Body	0.994	52.588	PASS	PASS	PASS	PASS	N/A
H	835	1/6/2020	7406	835	Body	0.978	54.174	PASS	PASS	PASS	PASS	N/A
I	1750	5/21/2019	7357	1750	Body	1.442	55.384	PASS	PASS	PASS	N/A	N/A
L	1750	8/16/2019	7410	1750	Body	1.467	53.429	PASS	PASS	PASS	N/A	N/A
P	1900	10/8/2019	7551	1900	Body	1.542	51.760	PASS	PASS	PASS	PASS	N/A
J	1900	1/1/2020	7571	1900	Body	1.579	51.919	PASS	PASS	PASS	PASS	N/A
P	2450	9/27/2019	7551	2450	Body	2.027	52.000	PASS	PASS	PASS	OFDM/TDD	PASS
K	2450	9/6/2019	7547	2450	Body	1.996	51.898	PASS	PASS	PASS	OFDM/TDD	PASS
I	2450	5/16/2019	7357	2450	Body	2.014	53.910	PASS	PASS	PASS	OFDM/TDD	PASS
I	2600	5/15/2019	7357	2600	Body	2.162	53.620	PASS	PASS	PASS	TDD	PASS
G	5250	10/4/2019	7409	5250	Body	5.223	47.070	PASS	PASS	PASS	OFDM	N/A
G	5600	10/7/2019	7409	5600	Body	5.884	47.080	PASS	PASS	PASS	OFDM	N/A
G	5750	10/7/2019	7409	5750	Body	6.111	46.780	PASS	PASS	PASS	OFDM	N/A

**Table D-2**  
**SAR System Validation Summary – 10g**

SAR SYSTEM #	FREQ. [MHz]	DATE	PROBE SN	PROBE CAL. POINT	COND.	PERM.	CW VALIDATION			MOD. VALIDATION		
					( $\sigma$ )	( $\epsilon_r$ )	SENSITIVITY	PROBE LINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR
L	1750	8/16/2019	7410	1750	Body	1.467	53.429	PASS	PASS	PASS	N/A	N/A
J	1900	1/1/2020	7571	1900	Body	1.579	51.919	PASS	PASS	PASS	PASS	N/A
K	2450	9/6/2019	7547	2450	Body	1.996	51.898	PASS	PASS	PASS	OFDM/TDD	PASS
K	2600	9/5/2019	7547	2600	Body	2.716	52.040	PASS	PASS	PASS	TDD	PASS
G	5250	10/4/2019	7409	5250	Body	5.223	47.070	PASS	PASS	PASS	OFDM	N/A
G	5600	10/7/2019	7409	5600	Body	5.884	47.080	PASS	PASS	PASS	OFDM	N/A
G	5750	10/7/2019	7409	5750	Body	6.111	46.780	PASS	PASS	PASS	OFDM	N/A

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to FCC KDB Publication 865664 D01v01r04.

FCC ID: A3LSMG986JPN		SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	APPENDIX D: Page 1 of 1		

## APPENDIX F: DOWNLINK LTE CA RF CONDUCTED POWERS

## 1.1 LTE Downlink Only Carrier Aggregation Test Reduction Methodology

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number of component carriers (CCs) supported by the product implementation. Per April 2018 TCBC Workshop Notes, the following test reduction methodology was applied to determine the combinations required for conducted power measurements.

### LTE DLCA Test Reduction Methodology:

- The supported combinations were arranged by the number of component carriers in columns.
- Any limitations on the PCC or SCC for each combination were identified alongside the combination (e.g. CA\_2A-2A-4A-12A, but B12 can only be configured as a SCC).
- Power measurements were performed for "supersets" (LTE CA combinations with multiple components carriers) and any "subsets" (LTE CA combinations with fewer component carriers) that were not completely covered by the supersets.
- Only subsets that have the exact same components as a superset were excluded for measurement.
- When there were certain restrictions on component carriers that existed in the superset that were not applied for the subset, the subset configuration was additionally evaluated.
- Both inter-band and intra-band downlink carrier aggregation scenarios were considered.
- Downlink CA combinations for SISO and 4x4 Downlink MIMO operations were measured independently, per May 2017 TCBC Workshop notes.



Table 1 – Example of Exclusion Table for SISO Configurations

Table 1: AEC Projects										Table 2: Other Projects									
Index	AEC	Approved Cost (Million \$)	Actual Cost (Million \$)	Completion Status	Completely Covered by Measurement Support	Index	AEC	Approved Cost (Million \$)	Actual Cost (Million \$)	Completion Status	Completely Covered by Measurement Support	Index	Other	Approved Cost (Million \$)	Actual Cost (Million \$)	Completion Status	Completely Covered by Measurement Support		
001-01	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-01	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-01	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-02	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-02	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-02	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-03	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-03	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-03	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-04	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-04	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-04	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-05	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-05	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-05	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-06	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-06	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-06	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-07	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-07	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-07	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-08	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-08	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-08	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-09	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-09	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-09	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-10	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-10	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-10	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-11	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-11	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-11	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-12	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-12	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-12	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-13	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-13	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-13	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-14	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-14	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-14	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-15	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-15	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-15	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-16	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-16	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-16	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-17	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-17	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-17	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-18	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-18	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-18	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-19	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-19	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-19	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-20	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-20	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-20	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-21	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-21	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-21	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-22	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-22	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-22	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-23	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-23	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-23	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-24	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-24	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-24	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-25	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-25	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-25	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-26	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-26	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-26	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-27	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-27	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-27	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-28	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-28	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-28	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-29	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-29	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-29	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-30	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-30	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-30	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-31	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-31	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-31	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-32	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-32	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-32	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-33	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-33	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-33	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-34	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-34	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-34	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-35	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-35	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-35	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-36	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-36	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-36	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-37	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-37	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-37	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-38	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-38	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-38	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-39	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-39	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-39	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-40	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-40	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-40	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-41	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-41	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-41	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-42	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-42	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-42	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-43	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-43	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-43	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-44	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-44	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-44	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-45	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-45	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-45	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-46	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-46	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-46	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-47	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-47	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-47	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-48	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-48	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-48	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-49	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-49	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-49	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-50	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-50	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-50	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-51	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-51	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-51	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-52	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-52	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-52	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-53	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-53	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-53	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-54	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-54	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes	001-54	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes		
001-55	CA 24-24	5,135,135.20	5,135,135.20	100%	Yes	001-55	CA 24-24-04	5,135,135.20	5,135,135.20	100%	Yes</								

Table 2 – Example of Exclusion Table for 4x4 Downlink MIMO Configurations

Table 2: FCC 15.125 MHz Channel Bandwidths						Table 3: FCC 15.125 MHz Channel Bandwidths						Table 4: FCC 15.125 MHz Channel Bandwidths								
Index	ACC	Supported Channel Bandwidth [MHz]		Restriction	Completely Covered by Measurement Superset	Index	ACC	Supported Channel Bandwidth [MHz]			Restriction	Completely Covered by Measurement Superset	Index	ACC	Supported Channel Bandwidth [MHz]				Restriction	Completely Covered by Measurement Superset
		CC1	CC2					CC1	CC2	CC3					CC1	CC2	CC3	CC4		
ACC #M1	CA [2C]	5, 10, 15, 20	5, 10, 15, 20	ACC #M6		ACC #M1	CA [2A] 2A-4A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20			ACC #M1	CA [2A] 5B-66A	5, 10, 15, 20	5, 10	5, 10	5, 10, 15, 20	No	
ACC #M2	CA [2A] 2A	5, 10, 15, 20	5, 10, 15, 20	ACC #M1		ACC #M2	CA [2A] 5A	5, 10, 15, 20	5, 10, 15, 20	5, 10			ACC #M2	CA 2A-5B-[66A]	5, 10, 15, 20	5, 10	5, 10	5, 10, 15, 20	No	
ACC #M3	CA [2A] 12A	5, 10, 15, 20	5, 10, 15, 20	No		ACC #M3	CA [2A] 5A-12A	5, 10, 15, 20	5, 10, 15, 20	5, 10			ACC #M3	CA [2A] 5A-[66B]	5, 10, 15, 20	5, 10	5, 10, 15	5, 10, 15	No	
ACC #M4	CA [2A] 4A (2)	5, 10, 15, 20	5, 10, 15, 20	ACC #M1		ACC #M4	CA [2A] 2A-12A	5, 10, 15, 20	5, 10, 15, 20	5, 10			ACC #M4	CA 2A-5A-[66B]	5, 10, 15, 20	5, 10	5, 10, 15	5, 10, 15	No	
ACC #M5	CA [2A] 4A (2)	5, 10, 15, 20	5, 10, 15, 20	No		ACC #M5	CA [2A] 5A-30A	5, 10, 15, 20	5, 10, 15, 20	5, 10			ACC #M5	CA [2A] 5A-[66C]	5, 10, 15, 20	5, 10	5, 10, 15, 20	5, 10, 15, 20	No	
ACC #M6	CA [2A] 5A	5, 10, 15, 20	5, 10	ACC #M3		ACC #M6	CA [2C] 66A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20			ACC #M6	CA 2A-5A-[66C]	5, 10, 15, 20	5, 10	5, 10, 15, 20	5, 10, 15, 20	No	
ACC #M7	CA [2A] 2A (1)	5, 10, 15, 20	5, 10	ACC #M4		ACC #M7	CA [2C] 66B	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20										
ACC #M8	CA [2A] 13A	5, 10, 15, 20	5, 10	ACC #M4		ACC #M8	CA [2C] 66B (1)	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20										
ACC #M9	CA [2A] 17A	5, 10	5, 10	No		ACC #M9	CA [2A] 2A-66A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20										
ACC #M10	CA [2A] 29A (2)	5, 10, 15, 20	5, 10	B29 SEC Only		ACC #M10	CA 2A-26A-[66A]	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20										
ACC #M11	CA [2A] 12A (1)	5, 10, 15, 20	5, 10			ACC #M11	CA [2A] 2A-17A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20										
ACC #M12	CA [2A] 46A (2)	5, 10, 15, 20	5, 10, 15			ACC #M12	CA [2A] 4A-29A	5, 10, 15, 20	5, 10, 15, 20	5, 10			B29 SEC Only							
ACC #M13	CA 2A-[66A] (2)	5, 10, 15, 20	5, 10, 15, 20	ACC #M2		ACC #M13	CA [2A] 4A-71A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20										
ACC #M14	CA [2A] 66A (2)	5, 10, 15, 20	5, 10, 15, 20	No		ACC #M14	CA [2A] 5B	5, 10, 15, 20	5, 10	5, 10			ACC #M15							
ACC #M15	CA [2A] 71A	5, 10, 15, 20	5, 10, 15, 20	ACC #M1		ACC #M15	CA [2A] 5A-66A	5, 10, 15, 20	5, 10	5, 10, 15, 20										
ACC #M16	CA 5A-[66A]	5, 10	5, 10, 15, 20	ACC #M16		ACC #M16	CA 2A-5A-[66A]	5, 10, 15, 20	5, 10	5, 10, 15, 20										
ACC #M17	CA [2A] 66A (4)	5, 10	5, 10, 15, 20	ACC #M17		ACC #M17	CA 2A-12A-[66A]	5, 10, 15, 20	5, 10	5, 10, 15, 20										
ACC #M18	CA [2A] 16A	5, 10	5, 10, 15, 20	ACC #M18		ACC #M18	CA [2A] 13A-66A	5, 10, 15, 20	5, 10	5, 10, 15, 20										
ACC #M19	CA 30A-[66A]	5, 10, 15, 20	5, 10, 15, 20	ACC #M19		ACC #M19	CA 2A-13A-[66A]	5, 10, 15, 20	5, 10	5, 10, 15, 20										
ACC #M20	CA [66B]	5, 10, 15	5, 10, 15	ACC #M4		ACC #M20	CA 2A-30A-[66A]	5, 10, 15, 20	5, 10	5, 10, 15, 20										
ACC #M21	CA [66C]	5, 10, 15, 20	5, 10, 15, 20	ACC #M6		ACC #M21	CA [2A] 66B	5, 10, 15, 20	5, 10, 15	5, 10, 15			ACC #M3							
ACC #M22	CA [66A] 66A	5, 10, 15, 20	5, 10, 15, 20	ACC #M22		ACC #M22	CA 2A-[66B]	5, 10, 15, 20	5, 10, 15	5, 10, 15			ACC #M4							
ACC #M23	CA [66A] 66A	5, 10, 15, 20	5, 10, 15, 20	No		ACC #M23	CA [2A] 66B (1)	5, 10, 15, 20	5, 10	5, 10, 15										

Note: [CC] indicates component carrier with 4x4 DL MIMO antenna configuration

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Reviewed by: Quality Manager
<b>Test Dates:</b> 02/10/20 - 03/17/20	<b>DUT Type:</b> Portable Handset	APPENDIX F: Page 1 of 3		


## 1.2 LTE Downlink Only Carrier Aggregation Test Selection and Setup

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number component carriers (CCs) supported by the product implementation. For those configurations required by April 2018 TCBC Workshop Notes, conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.


Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the maximum average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive. All bands required for SAR testing per FCC KDB procedures were considered. Based on the measured maximum powers below, no additional SAR tests were required for DLCA SAR configurations.

General PCC and SCC configuration selection procedure

- PCC uplink channel, channel bandwidth, modulation and RB configurations were selected based on section C)3)b)ii) of KDB 941225 D05 V01r02. The downlink PCC channel was paired with the selected PCC uplink channel according to normal configurations without carrier aggregation.
- To maximize aggregated bandwidth, highest channel bandwidth available for that CA combination was selected for SCC. For inter-band CA, the SCC downlink channels were selected near the middle of their transmission bands. For contiguous intra-band CA, the downlink channel spacing between the component carriers was set to multiple of 300 kHz less than the nominal channel spacing defined in section 5.4.1A of 3GPP TS 36.521. For non-contiguous intra-band CA, the downlink channel spacing between the component carriers was set to be larger than the nominal channel spacing and provided maximum separation between the component carriers.
- All selected PCC and SCC(s) remained fully within the uplink/downlink transmission band of the respective component carrier.
- 



**Figure 1**  
**DL CA Power Measurement Setup**

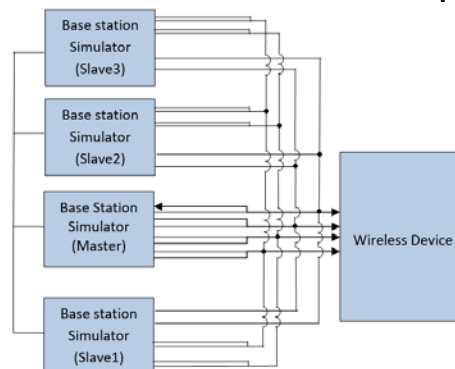

**Figure 2**  
**DL CA with DL 4x4 MIMO Power Measurement Setup**

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset			APPENDIX F: Page 2 of 3

## 1.3 Downlink Carrier Aggregation RF Conducted Powers

### 1.3.1 LTE Band 41 as PCC

Table 1  
Maximum Output Powers

Combination	PCC									SCC				Power	
	PCC Band	PCC BW [MHz]	PCC (UL) Channel	PCC (UL) Freq. [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C (1)	LTE B41	10	40620	2593	QPSK	1	25	40620	2593	LTE B41	20	40764	2607.4	23.92	24.19

## 1.4 DL CA with DL 4x4 MIMO RF Conduction Powers

This device supports downlink 4x4 MIMO operations for some LTE bands. Uplink transmission is limited to a single output stream. When carrier aggregation was applicable, the general test selection and setup procedures described in Section 1.2 were applied.

Per May 2017 TCB Workshop Notes, SAR for 4x4 DL MIMO was not needed since the maximum average output power in 4x4 DL MIMO mode was not more than 0.25 dB higher than the maximum output power with 4x4 DL MIMO inactive. Additionally, SAR for 4x4 MIMO Downlink Carrier Aggregation was not needed since the maximum average output power in 4x4 MIMO Downlink Carrier Aggregation mode was not more than 0.25 dB higher than the maximum output power with 4x4 MIMO Downlink and downlink carrier aggregation inactive.

### 1.4.1 LTE 4x4 MIMO DL Standalone Powers



Table 2  
Maximum Output Powers

LTE Band	Bandwidth [MHz]	Channel	Frequency [MHz]	Modulation	RB Size	RB Offset	4x4 DL MIMO Tx. Power [dBm]	Single Antenna Tx. Power [dBm]
41	10	40620	2593	QPSK	1	25	24.01	24.19

### 1.4.2 LTE Band 41 as PCC

Table 3  
Maximum Output Powers

Combination	PCC										SCC				DL Ant. Config.	Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	DL Ant. Config.	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]		LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA 41C1 (1)	LTE B41	10	40620	2593	QPSK	1	25	40620	2593	4x4	LTE B41	20	40764	2607.4	4x4	24.10	24.19

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of element	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 02/10/20 - 03/17/20	DUT Type: Portable Handset	APPENDIX F: Page 3 of 3		

## APPENDIX G POWER REDUCTION VERIFICATION

Per the May 2017 TCBC Workshop Notes, demonstration of proper functioning of the power reduction mechanisms is required to support the corresponding SAR configurations. The verification process was divided into two parts: (1) evaluation of output power levels for individual or multiple triggering mechanisms and (2) evaluation of the triggering distances for proximity-based sensors.

### G.1 Power Verification Procedure



The power verification was performed according to the following procedure:

1. A base station simulator was used to establish a conducted RF connection and the output power was monitored. The power measurements were confirmed to be within expected tolerances for all states before and after a power reduction mechanism was triggered. For licensed modes, the device state index as displayed on the device UI was recorded before and after the mechanism was triggered.
2. Step 1 was repeated for all relevant modes and frequency bands for the mechanism being investigated.
3. Steps 1 and 2 were repeated for all individual power reduction mechanisms and combinations thereof. For the licensed modes combination cases, one mechanism was switched to a 'triggered' state at a time; the device state index was confirmed to be corresponding to the 'triggered' state after each additional mechanism was activated.

### G.2 Distance Verification Procedure

The distance verification procedure was performed according to the following procedure:

1. A base station simulator was used to establish an RF connection and to monitor the power levels. The device being tested was placed below the relevant section of the phantom with the relevant side or edge of the device facing toward the phantom. For licensed modes, the device state index on the device UI was monitored to determine the triggering state.
2. The device was moved toward and away from the phantom to determine the distance at which the mechanism triggers and the output power is reduced, per KDB Publication 616217 D04v01r02 and FCC Guidance. Each applicable test position was evaluated. The distances were confirmed to be the same or larger (more conservative) than the minimum distances provided by the manufacturer.
3. Steps 1 and 2 were repeated for low, mid, and high bands, as appropriate (see note below Table G-2 for more details).
4. Steps 1 through 3 were repeated for all distance-based power reduction mechanisms.

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 02/10/20 – 03/17/20	DUT Type: Portable Handset			APPENDIX G: Page 1 of 3

### G.3 Main Antenna Verification Summary

**Table G-1**  
**Power Measurement Verification for Main Antenna**



Mechanism(s)		Mode/Band	Device State Index		
1st	2nd		Un-triggered (Max)	Mechanism #1 (Reduced)	Mechanism #2 (Reduced)
Hotspot On		GPRS 1900 1 Tx Slot	0	3	
Grip		GPRS 1900 1 Tx Slot	0	1	
Hotspot On	Grip	GPRS 1900 1 Tx Slot	0	3	3
Grip	Hotspot On	GPRS 1900 1 Tx Slot	0	1	3
Hotspot On		LTE FDD Band 4	0	3	
Grip		LTE FDD Band 4	0	1	
Hotspot On	Grip	LTE FDD Band 4	0	3	3
Grip	Hotspot On	LTE FDD Band 4	0	1	3
Hotspot On		LTE TDD Band 41	0	3	
Grip		LTE TDD Band 41	0	1	
Hotspot On	Grip	LTE TDD Band 41	0	3	3
Grip	Hotspot On	LTE TDD Band 41	0	1	3

\*Note: This device uses different Device State Indices (DSI) to configure different time averaged power levels based on certain exposure scenarios. For this device, DSI = 1 represents the case when the grip sensor is active, DSI=2 represents the case where the device is held to ear, and DSI = 3 represents the case when hotspot mode is active. DSI = 0 is configured at max power when the device cannot detect the use condition.

**Table G-2**  
**Distance Measurement Verification for Main Antenna**

Mechanism(s)	Test Condition	Band	Distance Measurements (mm)		Minimum Distance per Manufacturer (mm)
			Moving Toward	Moving Away	
Grip	Phablet - Back Side	Mid	11	13	9
Grip	Phablet - Back Side	High	11	13	9
Grip	Phablet - Front Side	Mid	9	11	7
Grip	Phablet - Front Side	High	9	11	7
Grip	Phablet - Bottom Edge	Mid	12	14	12
Grip	Phablet - Bottom Edge	High	12	14	12

\*Note: Mid band refers to: GSM1900, LTE B4; High band refers to: LTE B41

<b>FCC ID:</b> A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Dates:</b> 02/10/20 – 03/17/20	<b>DUT Type:</b> Portable Handset			<b>APPENDIX G:</b> Page 2 of 3

## G.4 WIFI Verification Summary

**Table G-3**  
**Power Measurement Verification WIFI – Antenna 1**



Mechanism(s)	Mode/Band	Conducted Power (dBm)	
1st		Un-triggered (Max)	Mechanism #1 (Reduced)
Held-to-Ear	802.11b	17.76	16.21
Held-to-Ear	802.11g	16.56	16.17
Held-to-Ear	802.11n (2.4GHz)	16.59	16.12
Held-to-Ear	802.11a	16.64	13.59
Held-to-Ear	802.11n (5GHz, 20MHz BW)	14.98	12.17
Held-to-Ear	802.11n (5GHz, 40MHz BW)	14.15	12.19
Held-to-Ear	802.11ac (20MHz BW)	16.84	13.99
Held-to-Ear	802.11ac (40MHz BW)	14.38	12.67
Held-to-Ear	802.11ac (80MHz BW)	12.76	12.18

\*Note: 802.11ax and MIMO WIFI modes were not evaluated due to equipment limitations.

**Table G-4**  
**Power Measurement Verification WIFI – Antenna 2**

Mechanism(s)	Mode/Band	Conducted Power (dBm)	
1st		Un-triggered (Max)	Mechanism #1 (Reduced)
Held-to-Ear	802.11b	18.86	16.99
Held-to-Ear	802.11g	17.81	16.79
Held-to-Ear	802.11n (2.4GHz)	17.19	16.97
Held-to-Ear	802.11a	17.00	13.87
Held-to-Ear	802.11n (5GHz, 20MHz BW)	17.29	13.99
Held-to-Ear	802.11n (5GHz, 40MHz BW)	15.36	12.80
Held-to-Ear	802.11ac (20MHz BW)	16.33	13.46
Held-to-Ear	802.11ac (40MHz BW)	15.12	12.59
Held-to-Ear	802.11ac (80MHz BW)	13.44	12.21

\*Note: 802.11ax and MIMO WIFI modes were not evaluated due to equipment limitations.

<b>FCC ID:</b> A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Dates:</b> 02/10/20 – 03/17/20	<b>DUT Type:</b> Portable Handset			<b>APPENDIX G:</b> Page 3 of 3

## APPENDIX H: IEEE 802.11AX RU SAR EXCLUSION

### 1.1 IEEE 802.11ax RU SAR Exclusion




To make the most efficient use of the additional available subcarriers (data tones), IEEE 802.11ax can utilize Orthogonal Frequency-Division Multiple Access (OFDMA) which divides the existing 802.11 channels into smaller subchannels called Resource Units (RUs). Possible RU sizes are: 26T, 52T, 106T, 242T, 484T and 996T.

Per April 2019 TCB Workshop Notes, 802.11ax was considered a higher order 802.11 mode when compared to a/b/g/n/ac to apply KDB Publication 248227 D01v02r02 for OFDM mode selection. Therefore, SAR tests were not required for 802.11ax based on the maximum allowed output powers of OFDM modes and the reported SAR values. Per FCC Guidance, maximum conducted powers were performed for each RU size to demonstrate that the output powers would not be higher than the other OFDM 802.11 modes.

### 1.2 IEEE 802.11ax RU Target Powers

#### 1.2.1 Maximum 802.11ax RU WLAN Output Power

Tones		SISO (ANT1/2) /in dBm				MIMO (ALL) /in dBm			
		2.4GHz	5GHz/20MHz	5GHz/40MHz	5GHz/80MHz	2.4GHz	5GHz/20MHz	5GHz/40MHz	5GHz/80MHz
26T	Maximum	14.0 ch. 12: 13.0 ch. 13: 4.0	11.0	11.0	11.0	14.0 ch. 12: 13.0 ch. 13: 4.0	11.0	11.0	11.0
	Nominal	13.0 ch. 12: 12.0 ch. 13: 3.0	10.0	10.0	10.0	13.0 ch. 12: 12.0 ch. 13: 3.0	10.0	10.0	10.0
52T	Maximum	15.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	13.0	12.0	11.0	15.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	13.0	12.0	11.0
	Nominal	14.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	12.0	11.0	10.0	14.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	12.0	11.0	10.0
106T	Maximum	16.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	15.0	13.0	12.0	16.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	15.0	13.0	12.0
	Nominal	15.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	14.0	12.0	11.0	15.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	14.0	12.0	11.0
242T	Maximum	17.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	16.0	14.0 ch. 38: 13.5	13.0	17.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	16.0	14.0 ch. 38: 13.5	13.0
	Nominal	16.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	15.0	13.0 ch. 38: 12.5	12.0	16.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	15.0	13.0 ch. 38: 12.5	12.0
484T	Maximum			14.0 ch. 38: 13.5	13.0			14.0 ch. 38: 13.5	13.0
	Nominal			13.0 ch. 38: 12.5	12.0			13.0 ch. 38: 12.5	12.0
996T	Maximum				13.0				13.0
	Nominal				12.0				12.0

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 02/10/20 – 03/17/20	DUT Type: Portable Handset			APPENDIX H: Page 1 of 9






## 1.2.2 Reduced 802.11ax RU WLAN Output Power – Table 1

Applicable for conditions:

- RCV Active
- Simultaneous conditions with 2.4 GHz WLAN and 5 GHz WLAN

Tones		SISO (ANT1/2) /in dBm				MIMO (ALL) /in dBm			
		2.4GHz	5GHz/20MHz	5GHz/40MHz	5GHz/80MHz	2.4GHz	5GHz/20MHz	5GHz/40MHz	5GHz/80MHz
26T	Maximum	14.0 ch. 12: 13.0 ch. 13: 4.0	11.0	11.0	11.0	14.0 ch. 12: 13.0 ch. 13: 4.0	11.0	11.0	11.0
	Nominal	13.0 ch. 12: 12.0 ch. 13: 3.0	10.0	10.0	10.0	13.0 ch. 12: 12.0 ch. 13: 3.0	10.0	10.0	10.0
52T	Maximum	15.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	13.0	12.0	11.0	15.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	13.0	12.0	11.0
	Nominal	14.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	12.0	11.0	10.0	14.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	12.0	11.0	10.0
106T	Maximum	16.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	14.0	13.0	12.0	16.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	15.0	13.0	12.0
	Nominal	15.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	13.0	12.0	11.0	15.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	14.0	12.0	11.0
242T	Maximum	17.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	14.0	14.0 ch. 38: 13.5	13.0	17.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	16.0	14.0 ch. 38: 13.5	13.0
	Nominal	16.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	13.0	13.0 ch. 38: 12.5	12.0	16.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	15.0	13.0 ch. 38: 12.5	12.0
484T	Maximum			14.0 ch. 38: 13.5	13.0			14.0 ch. 38: 13.5	13.0
	Nominal			13.0 ch. 38: 12.5	12.0			13.0 ch. 38: 12.5	12.0
996T	Maximum				13.0				13.0
	Nominal				12.0				12.0




FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of</small> 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 02/10/20 – 03/17/20	DUT Type: Portable Handset			APPENDIX H: Page 2 of 9

### 1.2.3 Reduced 802.11ax RU WLAN Output Power – Table 2

Applicable for conditions:

- RCV Active during simultaneous conditions with 2.4 GHz WLAN and 5 GHz WLAN

Tones		SISO (ANT1/2) /in dBm				MIMO (ALL) /in dBm			
		2.4GHz	5GHz/20MHz	5GHz/40MHz	5GHz/80MHz	2.4GHz	5GHz/20MHz	5GHz/40MHz	5GHz/80MHz
26T	Maximum	14.0 ch. 12: 13.0 ch. 13: 4.0	11.0	11.0	11.0	14.0 ch. 12: 13.0 ch. 13: 4.0	11.0	11.0	11.0
	Nominal	13.0 ch. 12: 12.0 ch. 13: 3.0	10.0	10.0	10.0	13.0 ch. 12: 12.0 ch. 13: 3.0	10.0	10.0	10.0
52T	Maximum	14.0 ch. 12: 13.0 ch. 13: 4.0	13.0	12.0	11.0	15.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	13.0	12.0	11.0
	Nominal	13.0 ch. 12: 12.0 ch. 13: 3.0	12.0	11.0	10.0	14.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	12.0	11.0	10.0
106T	Maximum	14.0 ch. 12: 13.0 ch. 13: 4.0	14.0	13.0	12.0	16.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	15.0	13.0	12.0
	Nominal	13.0 ch. 12: 12.0 ch. 13: 3.0	13.0	12.0	11.0	15.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	14.0	12.0	11.0
242T	Maximum	14.0 ch. 12: 13.0 ch. 13: 4.0	14.0	14.0 ch. 38: 13.5	13.0	17.0 ch. 11: 14.5 ch. 12: 13.0 ch. 13: 4.0	16.0	14.0 ch. 38: 13.5	13.0
	Nominal	13.0 ch. 12: 12.0 ch. 13: 3.0	13.0	13.0 ch. 38: 12.5	12.0	16.0 ch. 11: 13.5 ch. 12: 12.0 ch. 13: 3.0	15.0	13.0 ch. 38: 12.5	12.0
484T	Maximum			14.0 ch. 38: 13.5	13.0			14.0 ch. 38: 13.5	13.0
	Nominal			13.0 ch. 38: 12.5	12.0			13.0 ch. 38: 12.5	12.0
996T	Maximum				13.0				13.0
	Nominal				12.0				12.0

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of</small> 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 02/10/20 – 03/17/20	DUT Type: Portable Handset			APPENDIX H: Page 3 of 9




### 1.3 IEEE 802.11ax Measured Powers

Table 1  
Maximum 2.4 GHz 802.11ax RU Output Power – Ant 1

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)	Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	26T	0	13.40	2412	1	52T	37	14.76
			4	13.90				38	14.74
			8	13.12				40	14.49
2437	6	26T	0	13.46	2437	6	52T	37	14.75
			4	13.78				38	14.07
			8	13.53				40	14.06
2462	11	26T	0	13.79	2462	11	52T	37	14.20
			4	13.18				38	13.89
			8	13.06				40	13.89




  

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)	Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	106T	53	15.82	2412	1	242T	61	16.09
			54	15.59					
2437	6	106T	53	15.38	2437	6	242T	61	16.27
			54	15.17	2457	10	242T	61	16.46
2462	11	106T	53	14.06	2462	11	242T	61	14.48
			54	14.14					

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of</small> 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 02/10/20 – 03/17/20	DUT Type: Portable Handset			APPENDIX H: Page 4 of 9

**Table 2**  
**Maximum 2.4 GHz 802.11ax RU Output Power – Ant 2**

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)	Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	26T	0	13.51	2412	1	52T	37	14.24
			4	13.27				38	14.46
			8	13.12				40	14.30
2437	6	26T	0	13.92	2437	6	52T	37	14.79
			4	13.68				38	14.44
			8	13.61				40	14.29
2462	11	26T	0	13.39	2462	11	52T	37	14.47
			4	13.32				38	13.97
			8	13.54				40	13.88
Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)	Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers (dBm)
2412	1	106T	53	15.97	2412	1	242T	61	16.83
			54	15.50	2437	6	242T	61	16.73
2437	6	106T	53	15.46	2457	10	242T	61	16.77
			54	15.72	2462	11	242T	61	14.13
2462	11	106T	53	14.30					
			54	14.21					

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of</small> 	<b>SAR EVALUATION REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Dates:</b> 02/10/20 – 03/17/20	<b>DUT Type:</b> Portable Handset			APPENDIX H: Page 5 of 9




**Table 3**  
**Maximum 5 GHz 802.11ax RU Output Power – Ant 1**

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					0	4	8						37	39	40
	1	5180	36	26T	10.48	10.76	10.55		1	5180	36	52T	12.46	12.60	12.48
		5200	40	26T	10.41	10.65	10.40			5200	40	52T	12.36	12.53	12.41
		5240	48	26T	10.35	10.62	10.36			5240	48	52T	12.29	12.44	12.31
	2A	5260	52	26T	10.28	10.42	10.12		2A	5260	52	52T	12.38	12.41	12.31
		5280	56	26T	10.14	10.44	10.30			5280	56	52T	12.29	12.44	12.27
		5320	64	26T	10.27	10.52	10.26			5320	64	52T	12.43	12.47	12.32
	2C	5500	100	26T	10.34	10.60	10.37		2C	5500	100	52T	12.47	12.52	12.32
		5600	120	26T	10.77	10.97	10.64			5600	120	52T	12.58	12.75	12.59
		5720	144	26T	10.18	10.36	10.07			5720	144	52T	12.93	12.97	12.96
3	5745	149	26T	10.04	10.05	10.87	3	5745	149	52T	12.96	12.92	12.75		
	5785	157	26T	10.08	10.38	10.13		5785	157	52T	12.96	12.33	12.96		
	5825	165	26T	10.96	10.33	10.90		5825	165	52T	12.90	12.28	12.95		

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					53	54	N/A						61	N/A	N/A
	1	5180	36	106T	14.57	14.67			1	5180	36	242T	15.63		
		5200	40	106T	14.52	14.52				5200	40	242T	15.54		
		5240	48	106T	14.48	14.49				5240	48	242T	15.50		
	2A	5260	52	106T	14.56	14.39			2A	5260	52	242T	15.20		
		5280	56	106T	14.50	14.57				5280	56	242T	15.29		
		5320	64	106T	14.49	14.48				5320	64	242T	15.26		
	2C	5500	100	106T	14.50	14.45			2C	5500	100	242T	15.22		
		5600	120	106T	14.71	14.73				5600	120	242T	15.48		
		5720	144	106T	14.88	14.88				5720	144	242T	15.50		
3	5745	149	106T	14.94	14.84		3	5745	149	242T	15.76				
	5785	157	106T	14.99	14.95			5785	157	242T	15.96				
	5825	165	106T	14.91	14.90			5825	165	242T	15.82				




40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					0	8	17						37	40	44
	1	5190	38	26T	10.98	10.99	10.88		1	5190	38	52T	11.20	11.94	11.08
		5230	46	26T	10.90	10.98	10.76			5230	46	52T	11.08	11.99	11.95
		5270	54	26T	10.88	10.69	10.69			5270	54	52T	11.94	11.85	11.88
	2A	5310	62	26T	10.77	10.76	10.69		2A	5310	62	52T	11.97	11.79	11.85
		5510	102	26T	10.84	10.84	10.98			5510	102	52T	11.99	11.85	11.26
		5590	118	26T	10.98	10.97	10.98			5590	118	52T	11.17	11.95	11.16
	2C	5710	142	26T	10.42	10.41	10.45		2C	5710	142	52T	11.61	11.47	11.69
		5755	151	26T	10.51	10.47	10.66			5755	151	52T	11.76	11.53	11.74
		5795	159	26T	10.17	10.73	10.28			5795	159	52T	11.22	11.68	11.45

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					53	54	56						61	62	N/A
	1	5190	38	106T	12.35	12.98	12.26		1	5190	38	242T	13.16	13.42	
		5230	46	106T	12.33	12.91	12.13			5230	46	242T	13.37	13.31	
		5270	54	106T	12.20	12.74	12.19			5270	54	242T	13.32	13.35	
	2A	5310	62	106T	12.22	12.77	12.03		2A	5310	62	242T	13.35	13.25	
		5510	102	106T	12.24	12.79	12.42			5510	102	242T	13.45	13.72	
		5590	118	106T	12.34	12.91	12.36			5590	118	242T	13.64	13.62	
	2C	5710	142	106T	12.78	12.41	12.81		2C	5710	142	242T	13.97	13.96	
		5755	151	106T	12.92	12.42	12.93			5755	151	242T	13.91	13.99	
		5795	159	106T	12.52	12.53	12.74			5795	159	242T	13.73	13.94	

FCC ID: A3LSMG986JPN	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 02/10/20 – 03/17/20	DUT Type: Portable Handset			APPENDIX H: Page 6 of 9

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					65	N/A	N/A
1	1	5190	38	484T	13.26		
		5230	46	484T	13.18		
2A	2A	5270	54	484T	13.20		
		5310	62	484T	13.88		
2C	2C	5510	102	484T	13.40		
		5590	118	484T	13.39		
		5710	142	484T	13.70		
3	3	5755	151	484T	13.75		
		5795	159	484T	13.61		

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					0	18	36						37	44	52
	1	5210	42	26T	10.97	10.51	10.72		10.18	10.41	10.87				
2A	5290	58	26T	10.72	10.26	10.58	10.81	10.16	10.73						
2C	5530	106	26T	10.85	10.71	10.90	10.95	10.37	10.94						
	5610	122	26T	10.95	10.73	10.98	10.14	10.45	10.20						
	5690	138	26T	10.32	10.93	10.27	10.34	10.72	10.46						
3	5775	155	26T	10.34	10.95	10.76	10.53	10.98	10.81						
80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					53	56	60						61	62	64
	1	5210	42	106T	11.25	11.43	11.05		12.51	12.67	12.32				
2A	5290	58	106T	11.98	11.31	11.86	12.17	12.39	12.15						
2C	5530	106	106T	11.20	11.46	11.20	12.41	12.56	12.49						
	5610	122	106T	11.21	11.61	11.35	12.38	12.73	12.64						
	5690	138	106T	11.44	11.80	11.63	12.74	12.92	12.73						
3	5775	155	106T	11.63	11.96	11.82	12.86	12.97	12.83						
80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					65	66	N/A						67	N/A	N/A
	1	5210	42	484T	12.27	12.12			12.15						
2A	5290	58	484T	12.94	12.88		12.98								
2C	5530	106	484T	12.28	12.41		12.18								
	5610	122	484T	12.31	12.53		12.20								
	5690	138	484T	12.60	12.69		12.50								
3	5775	155	484T	12.57	12.73		12.61								

FCC ID: A3LSMG986JPN	 <b>PCTEST</b> <small>Proud to be part of</small> 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 02/10/20 – 03/17/20	DUT Type: Portable Handset	APPENDIX H: Page 7 of 9		




**Table 4**  
**Maximum 5 GHz 802.11ax RU Output Power – Ant 2**

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					0	4	8						37	39	40
	1	5180	36	26T	10.61	10.97	10.94		1	5180	36	52T	12.80	12.98	12.90
		5200	40	26T	10.59	10.85	10.72			5200	40	52T	12.87	12.94	12.92
		5240	48	26T	10.59	10.97	10.75			5240	48	52T	12.94	12.90	12.97
	2A	5260	52	26T	10.72	10.87	10.61		2A	5260	52	52T	12.04	12.17	12.02
		5280	56	26T	10.66	10.98	10.71			5280	56	52T	12.15	12.33	12.25
		5320	64	26T	10.93	10.96	10.78			5320	64	52T	12.34	12.48	12.33
	2C	5500	100	26T	10.47	10.61	10.42		2C	5500	100	52T	12.21	12.40	12.20
		5600	120	26T	10.92	10.93	10.49			5600	120	52T	12.70	12.65	12.46
		5720	144	26T	10.91	10.97	10.63			5720	144	52T	12.77	12.96	12.79
3	5745	149	26T	10.53	10.55	10.07	3	5745	149	52T	12.48	12.38	12.10		
	5785	157	26T	10.40	10.47	10.25		5785	157	52T	12.46	12.58	12.26		
	5825	165	26T	10.25	10.46	10.05		5825	165	52T	12.09	12.34	12.04		

20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			20MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					53	54	N/A						61	N/A	N/A
	1	5180	36	106T	14.90	14.95			1	5180	36	242T	15.91		
		5200	40	106T	14.03	14.11				5200	40	242T	15.94		
		5240	48	106T	14.13	14.14				5240	48	242T	15.93		
	2A	5260	52	106T	14.09	14.12			2A	5260	52	242T	15.11		
		5280	56	106T	14.21	14.17				5280	56	242T	15.26		
		5320	64	106T	14.36	14.32				5320	64	242T	15.35		
	2C	5500	100	106T	14.35	14.29			2C	5500	100	242T	15.38		
		5600	120	106T	14.72	14.52				5600	120	242T	15.57		
		5720	144	106T	14.80	14.68				5720	144	242T	15.73		
3	5745	149	106T	14.13	14.06		3	5745	149	242T	15.90				
	5785	157	106T	14.17	14.08			5785	157	242T	15.97				
	5825	165	106T	14.84	14.78			5825	165	242T	15.79				

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					0	8	17						37	40	44
	1	5190	38	26T	10.46	10.54	10.40		1	5190	38	52T	11.56	11.57	11.62
		5230	46	26T	10.47	10.57	10.45			5230	46	52T	11.61	11.48	11.61
		5270	54	26T	10.40	10.30	10.37			5270	54	52T	11.50	11.44	11.43
	2A	5310	62	26T	10.53	10.44	10.37		2A	5310	62	52T	11.62	11.52	11.43
		5510	102	26T	10.33	10.29	10.31			5510	102	52T	11.56	11.22	11.62
		5590	118	26T	10.41	10.40	10.25			5590	118	52T	11.59	11.28	11.39
	2C	5710	142	26T	10.40	10.18	10.17		2C	5710	142	52T	11.58	11.29	11.45
		5755	151	26T	10.94	10.80	10.87			5755	151	52T	11.70	11.68	11.84
		5795	159	26T	10.39	10.85	10.21			5795	159	52T	11.38	11.65	11.30

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					53	54	56						61	62	N/A
	1	5190	38	106T	12.93	12.61	12.81		1	5190	38	242T	13.25	13.29	
		5230	46	106T	12.90	12.54	12.85			5230	46	242T	13.86	13.65	
		5270	54	106T	12.78	12.32	12.79			5270	54	242T	13.80	13.70	
	2A	5310	62	106T	12.94	12.41	12.83		2A	5310	62	242T	13.96	13.69	
		5510	102	106T	12.64	12.29	12.80			5510	102	242T	13.67	13.97	
		5590	118	106T	12.72	12.23	12.64			5590	118	242T	13.65	13.59	
	2C	5710	142	106T	12.74	12.16	12.56		2C	5710	142	242T	13.74	13.55	
		5755	151	106T	12.37	12.85	12.23			5755	151	242T	13.91	13.96	
		5795	159	106T	12.91	12.69	12.63			5795	159	242T	13.79	13.82	




FCC ID: A3LSMG986JPN	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 02/10/20 – 03/17/20	DUT Type: Portable Handset	APPENDIX H: Page 8 of 9		

40MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index		
					65	N/A	N/A
1	1	5190	38	484T	13.05		
		5230	46	484T	13.68		
2A	2A	5270	54	484T	13.65		
		5310	62	484T	13.44		
2C	2C	5510	102	484T	13.51		
		5590	118	484T	13.32		
3	3	5710	142	484T	13.42		
		5755	151	484T	13.95		
		5795	159	484T	13.85		

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					0	18	36						37	44	52
	1	5210	42	26T	10.22	10.85	10.11		1	5210	42	52T	10.30	10.67	10.30
	2A	5290	58	26T	10.02	10.65	10.90		2A	5290	58	52T	10.14	10.55	10.10
2C	5530	106	26T	10.08	10.75	10.87	2C	5530	106	52T	10.17	10.25	10.06		
	5610	122	26T	10.03	10.52	10.78		5610	122	52T	10.14	10.26	10.97		
	5690	138	26T	10.11	10.52	10.72		5690	138	52T	10.29	10.34	10.96		
3	5775	155	26T	10.64	10.27	10.39	3	5775	155	52T	10.83	10.98	10.60		

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					53	56	60						61	62	64
	1	5210	42	106T	11.46	11.69	11.41		1	5210	42	242T	12.62	12.94	12.62
	2A	5290	58	106T	11.18	11.52	11.17		2A	5290	58	242T	12.51	12.76	12.47
2C	5530	106	106T	11.33	11.44	11.27	2C	5530	106	242T	12.45	12.61	12.48		
	5610	122	106T	11.25	11.42	11.11		5610	122	242T	12.42	12.55	12.36		
	5690	138	106T	11.39	11.39	11.14		5690	138	242T	12.39	12.42	12.40		
3	5775	155	106T	11.77	11.95	11.61	3	5775	155	242T	12.79	12.98	12.85		

80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)			80MHz BW	Band	Freq [MHz]	Channel	Tones	Avg Conducted Power (dBm)		
					RU Index								RU Index		
					65	66	N/A						67	N/A	N/A
	1	5210	42	484T	12.46	12.45			1	5210	42	996T	12.29		
	2A	5290	58	484T	12.22	12.36			2A	5290	58	996T	12.95		
2C	5530	106	484T	12.23	12.49		2C	5530	106	996T	12.76				
	5610	122	484T	12.23	12.32			5610	122	996T	12.65				
	5690	138	484T	12.33	12.45			5690	138	996T	12.66				
3	5775	155	484T	12.67	12.90		3	5775	155	996T	12.28				

FCC ID: A3LSMG986JPN	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 02/10/20 – 03/17/20	DUT Type: Portable Handset			APPENDIX H: Page 9 of 9