

FCC LTE REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

January 16, 2020

Address:

 129, Samsung-ro, Yeongtong-gu,
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:

 HCT CO., LTD.,
 74, Seoicheon-ro 578beon-gil, Majang-myeon,
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2001-FC028

FCC ID: A3LSMG988B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-G988B/DS
 Additional Model(s): SM-G988B
 EUT Type: Mobile Phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §90, §22, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band26 (1.4)	814.7 – 823.3	1M10G7D	QPSK	0.193	22.85
		1M10W7D	16QAM	0.160	22.05
		1M10W7D	64QAM	0.128	21.08
		1M10W7D	256QAM	0.066	18.20
LTE – Band26 (3)	815.5 – 822.5	2M71G7D	QPSK	0.191	22.82
		2M71W7D	16QAM	0.167	22.24
		2M72W7D	64QAM	0.125	20.96
		2M71W7D	256QAM	0.061	17.87
LTE – Band26 (5)	816.5 – 821.5	4M51G7D	QPSK	0.194	22.87
		4M51W7D	16QAM	0.163	22.11
		4M54W7D	64QAM	0.132	21.21
		4M53W7D	256QAM	0.064	18.03
LTE – Band26 (10)	819.0	9M01G7D	QPSK	0.195	22.91
		9M00W7D	16QAM	0.165	22.18
		8M99W7D	64QAM	0.132	21.19
		9M01W7D	256QAM	0.063	17.98
LTE – Band26 (15)	821.5	13M5G7D	QPSK	0.202	23.05
		13M4W7D	16QAM	0.172	22.36
		13M4W7D	64QAM	0.138	21.39
		13M5W7D	256QAM	0.067	18.29

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report prepared by : Kwon Jeong
 Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
 Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2001-FC028	January 16, 2020	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.(HCT Accreditation No.: KT197)

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. DESCRIPTION OF EUT	5
2.2. MEASURING INSTRUMENT CALIBRATION	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS.....	6
3.1 TEST PROCEDURE	6
3.2 CONDUCTED OUTPUT POWER	7
3.3 RADIATED POWER.....	8
3.4 RADIATED SPURIOUS EMISSIONS	9
3.5 OCCUPIED BANDWIDTH.	10
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	11
3.7 CHANNEL EDGE	12
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	13
3.9 WORST CASE(RADIATED TEST)	14
3.10 WORST CASE(CONDUCTED TEST)	15
4. LIST OF TEST EQUIPMENT	16
5. MEASUREMENT UNCERTAINTY	17
6. SUMMARY OF TEST RESULTS	18
7. SAMPLE CALCULATION	19
8. TEST DATA	21
8.1 CONDUCTED OUTPUT POWER	21
8.2 EFFECTIVE RADIATED POWER.....	26
8.3 RADIATED SPURIOUS EMISSIONS	28
8.4 OCCUPIED BANDWIDTH	33
8.5 CONDUCTED SPURIOUS EMISSIONS	34
8.6 CHANNEL EDGE.....	34
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	35
8.8 STADDLE CHANNEL	40
8.8.1 EFFECTIVE RADIATED POWER	40
8.8.2 RADIATED SPURIOUS EMISSIONS	41
8.8.3 CONDUCTED SPURIOUS EMISSIONS	43
8.8.4 CHANNEL EDGE(Part90)	43
8.8.5 BAND EDGE(Part22)	43
9. TEST PLOTS.....	44
10. TEST PLOTS (STRADDLE CHANNEL).....	93
11 ANNEX A_ TEST SETUP PHOTO	118

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG988B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§90, §22, §2
EUT Type:	Mobile Phone
Model(s):	SM-G988B/DS
Additional Model(s):	SM-G988B
Tx Frequency:	814.7 MHz – 823.3 MHz (LTE – Band 26 (1.4 MHz)) 815.5 MHz – 822.5 MHz (LTE – Band 26 (3 MHz)) 816.5 MHz – 821.5 MHz (LTE – Band 26 (5 MHz)) 819.0 MHz (LTE – Band 26 (10 MHz)) 821.5 MHz (LTE – Band 26 (15 MHz))
Date(s) of Tests:	November 18, 2019 ~ January 10, 2020

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac/ax (HT20/40/80), Bluetooth, BT LE, NFC, ANT+, Power Sharing.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 CONDUCTED OUTPUT POWER

Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

Test setup

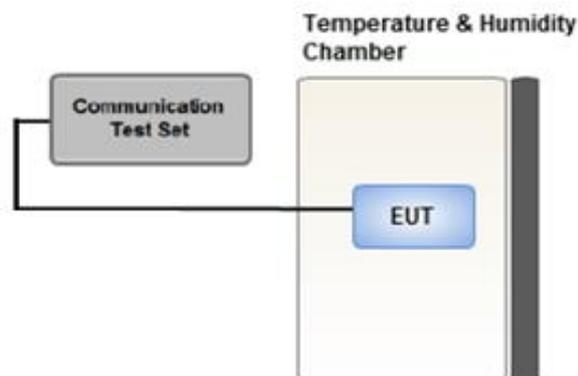

3.3 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.4 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.5 OCCUPIED BANDWIDTH.

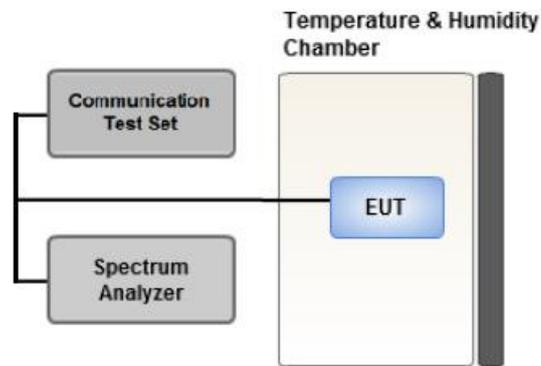

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

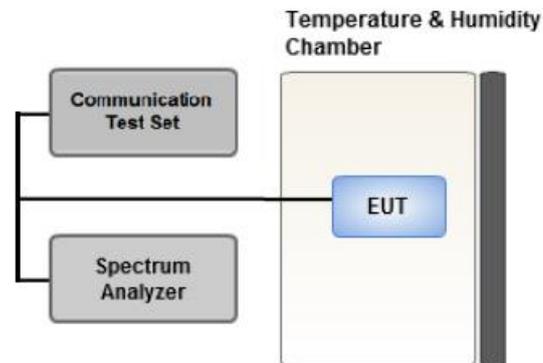

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 CHANNEL EDGE

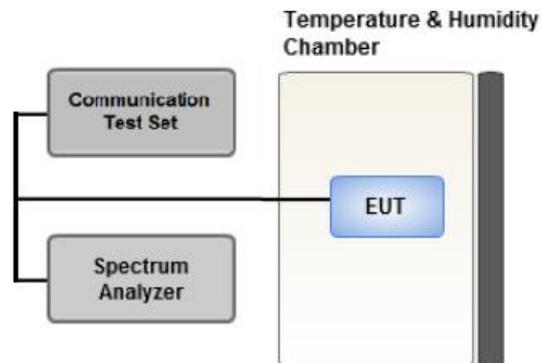

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW :
 - .- EA licensee's frequency block by up to and including 37.5 kHz : 300Hz
 - .- EA licensee's frequency block greater than 37.5 kHz : 100kHz
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

For 90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

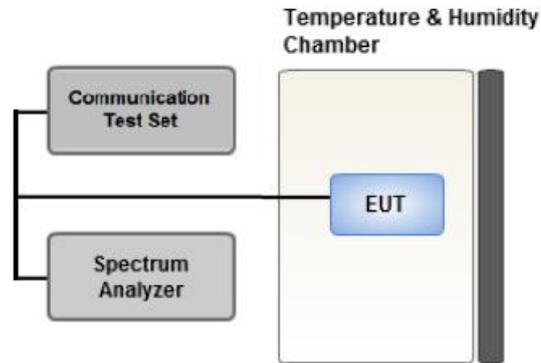

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
 - All modes of operation were investigated and the worst case configuration results are reported.
 - The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
 - All modes of operation were tested and the worst case results are reported.
 - Please refer to the table below.
 - SM-G988B/DS & additional models were tested and the worst case results are reported.
- (Worst case : SM-G988B/DS)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	X

3.10 WORST CASE(CONDUCTED TEST)

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

- SM-G988B/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-G988B/DS)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5	High	Full RB	0
	QPSK, 16QAM, 64QAM, 256QAM	10, 15	Mid	Full RB	0
Channel Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Mid	1	0
				1	49
		15	Mid	1	0
				1	74
1.4, 3, 5	Low, High	Full RB	0		
10, 15	Mid	Full RB	0		
Band Edge (Staddle Channel)	QPSK	1.4	Mid	1	5
		3	Mid	1	14
		5	Mid	1	24
		10	Mid	1	49
		15	Mid	1	74
		1.4, 3, 5, 10, 15	Mid	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5	Low, High	1	0
		10, 15	Mid	1	0

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	06/10/2019	Annual	06/10/2020
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	06/10/2019	Annual	06/10/2020
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	05/03/2019	Annual	05/03/2020
Agilent	E3632A/DC Power Supply	MY40004326	07/01/2019	Annual	07/01/2020
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000717	08/14/2019	Annual	08/14/2020
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	01/28/2019	Biennial	01/28/2021
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	05/08/2019	Annual	05/08/2020
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2019	Annual	06/04/2020
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2019	Annual	10/14/2020
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/27/2019	Annual	08/27/2020
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/09/2019	Annual	08/09/2020
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/30/2019	Annual	01/30/2020
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/15/2019	Annual	07/15/2020
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	05/17/2019	Annual	05/17/2020
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Channel Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §90.691	< 50 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5 kHz of Block Edge	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046 §90.635	< 100 Watts	PASS
Frequency stability / variation of ambient temperature	§2.1055, §90.213 §22.355	< 2.5 ppm	PASS

Note:

1. The same samples were used for SAR and EMC

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §90.691 §22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

64QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

256QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				814.7MHz		823.3MHz		
				dBm	W	dBm	W	
1.4	QPSK	1	0	22.70	0.186	22.75	0.188	100
		1	3	22.54	0.179	22.60	0.182	100
		1	5	22.59	0.182	22.69	0.186	100
		3	0	22.70	0.186	22.76	0.189	100
		3	1	22.80	0.191	22.80	0.191	100
		3	3	22.76	0.189	22.85	0.193	100
		6	0	21.75	0.150	21.77	0.150	100
	16QAM	1	0	21.87	0.154	21.90	0.155	100
		1	3	21.81	0.152	21.85	0.153	100
		1	5	21.94	0.156	21.94	0.156	100
		3	0	21.87	0.154	21.95	0.157	100
		3	1	21.97	0.157	22.05	0.160	100
		3	3	21.65	0.146	21.70	0.148	100
		6	0	20.84	0.121	20.89	0.123	100
	64QAM	1	0	20.98	0.125	21.08	0.128	100
		1	3	20.77	0.119	20.80	0.120	100
		1	5	20.88	0.122	20.93	0.124	100
		3	0	20.80	0.120	20.80	0.120	100
		3	1	20.68	0.117	20.70	0.117	100
		3	3	20.70	0.117	20.80	0.120	100
		6	0	19.82	0.096	19.87	0.097	100
	256QAM	1	0	18.16	0.065	18.20	0.066	100
		1	3	17.72	0.059	17.79	0.060	100
		1	5	17.73	0.059	17.73	0.059	100
		3	0	17.70	0.059	17.75	0.060	100
		3	1	17.83	0.061	17.93	0.062	100
		3	3	17.79	0.060	17.83	0.061	100
		6	0	18.05	0.064	18.14	0.065	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				815.5MHz		822.5MHz		
				dBm	W	dBm	W	
3	QPSK	1	0	22.72	0.187	22.77	0.189	100
		1	7	22.75	0.188	22.82	0.191	100
		1	14	22.75	0.188	22.76	0.189	100
		8	0	21.88	0.154	21.88	0.154	100
		8	3	21.79	0.151	21.85	0.153	100
		8	7	21.87	0.154	21.93	0.156	100
		15	0	21.90	0.155	21.92	0.156	100
	16QAM	1	0	21.93	0.156	22.01	0.159	100
		1	7	21.97	0.157	22.05	0.160	100
		1	14	22.14	0.164	22.24	0.167	100
		8	0	20.85	0.122	20.92	0.124	100
		8	3	20.85	0.122	20.92	0.123	100
		8	7	20.82	0.121	20.84	0.121	100
		15	0	20.82	0.121	20.89	0.123	100
	64QAM	1	0	20.92	0.124	20.93	0.124	100
		1	7	20.89	0.123	20.90	0.123	100
		1	14	20.91	0.123	20.96	0.125	100
		8	0	19.80	0.095	19.86	0.097	100
		8	3	19.78	0.095	19.79	0.095	100
		8	7	19.82	0.096	19.82	0.096	100
		15	0	19.83	0.096	19.88	0.097	100
	256QAM	1	0	17.75	0.060	17.83	0.061	100
		1	7	17.69	0.059	17.70	0.059	100
		1	14	17.80	0.060	17.87	0.061	100
		8	0	17.66	0.058	17.72	0.059	100
		8	3	17.72	0.059	17.73	0.059	100
		8	7	17.69	0.059	17.77	0.060	100
		15	0	17.75	0.060	17.81	0.060	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				816.5MHz		821.5MHz		
				dBm	W	dBm	W	
5	QPSK	1	0	22.81	0.191	22.86	0.193	100
		1	12	22.74	0.188	22.82	0.191	100
		1	24	22.84	0.192	22.87	0.194	100
		12	0	21.87	0.154	21.93	0.156	100
		12	6	21.91	0.155	22.01	0.159	100
		12	11	21.84	0.153	21.91	0.155	100
		25	0	21.85	0.153	21.87	0.154	100
	16QAM	1	0	22.09	0.162	22.09	0.162	100
		1	12	22.02	0.159	22.11	0.163	100
		1	24	21.99	0.158	22.09	0.162	100
		12	0	20.92	0.124	21.01	0.126	100
		12	6	20.88	0.122	20.93	0.124	100
		12	11	20.90	0.123	20.94	0.124	100
		25	0	20.83	0.121	20.91	0.123	100
	64QAM	1	0	20.98	0.125	21.04	0.127	100
		1	12	20.94	0.124	21.04	0.127	100
		1	24	21.11	0.129	21.21	0.132	100
		12	0	19.92	0.098	20.00	0.100	100
		12	6	19.84	0.096	19.88	0.097	100
		12	11	19.88	0.097	19.94	0.099	100
		25	0	19.88	0.097	19.96	0.099	100
	256QAM	1	0	17.86	0.061	17.91	0.062	100
		1	12	17.83	0.061	17.84	0.061	100
		1	24	17.98	0.063	18.03	0.064	100
		12	0	17.78	0.060	17.80	0.060	100
		12	6	17.82	0.061	17.88	0.061	100
		12	11	17.77	0.060	17.86	0.061	100
		25	0	17.77	0.060	17.79	0.060	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				819MHz		
				dBm	W	
10	QPSK	1	0	22.85	0.193	100
		1	24	22.79	0.190	100
		1	49	22.91	0.195	100
		25	0	21.88	0.154	100
		25	12	21.91	0.155	100
		25	24	21.91	0.155	100
		50	0	21.92	0.156	100
	16QAM	1	0	22.13	0.163	100
		1	24	21.96	0.157	100
		1	49	22.18	0.165	100
		25	0	20.91	0.123	100
		25	12	20.92	0.124	100
		25	24	20.96	0.125	100
		50	0	20.89	0.123	100
	64QAM	1	0	21.03	0.127	100
		1	24	21.16	0.131	100
		1	49	21.19	0.132	100
		25	0	19.93	0.098	100
		25	12	19.91	0.098	100
		25	24	19.90	0.098	100
		50	0	19.97	0.099	100
	256QAM	1	0	17.97	0.063	100
		1	24	17.76	0.060	100
		1	49	17.98	0.063	100
		25	0	17.82	0.061	100
		25	12	17.83	0.061	100
		25	24	17.86	0.061	100
		50	0	17.85	0.061	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				821.5MHz		
				dBm	W	
15	QPSK	1	0	22.95	0.197	100
		1	36	22.99	0.199	100
		1	74	23.05	0.202	100
		36	0	22.07	0.161	100
		36	18	22.18	0.165	100
		36	39	22.23	0.167	100
		75	0	22.21	0.166	100
	16QAM	1	0	22.36	0.172	100
		1	36	22.21	0.166	100
		1	74	22.27	0.169	100
		36	0	21.17	0.131	100
		36	18	21.12	0.130	100
		36	39	21.12	0.129	100
		75	0	21.14	0.130	100
	64QAM	1	0	21.39	0.138	100
		1	36	21.13	0.130	100
		1	74	21.28	0.134	100
		36	0	20.12	0.103	100
		36	18	20.19	0.105	100
		36	39	20.15	0.104	100
		75	0	20.05	0.101	100
	256QAM	1	0	18.29	0.067	100
		1	36	18.09	0.064	100
		1	74	18.15	0.065	100
		36	0	18.10	0.065	100
		36	18	18.11	0.065	100
		36	39	18.13	0.065	100
		75	0	18.10	0.065	100

8.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
814.7	LTE B26/ 1.4 MHz	QPSK	-33.86	29.69	-10.29	1.27	H	< 100	0.065	18.13
		16QAM	-34.64	28.91	-10.29	1.27	H		0.054	17.35
		64QAM	-35.75	27.80	-10.29	1.27	H		0.042	16.24
		256QAM	-38.77	24.78	-10.29	1.27	H		0.021	13.22
823.3		QPSK	-33.29	30.32	-10.25	1.28	H		0.076	18.79
		16QAM	-34.11	29.50	-10.25	1.28	H		0.063	17.97
		64QAM	-35.11	28.50	-10.25	1.28	H		0.050	16.97
		256QAM	-38.17	25.44	-10.25	1.28	H		0.025	13.91

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
815.5	LTE B26/ 3 MHz	QPSK	-33.83	29.72	-10.29	1.27	H	< 100	0.066	18.16
		16QAM	-34.56	28.99	-10.29	1.27	H		0.055	17.43
		64QAM	-35.69	27.86	-10.29	1.27	H		0.043	16.30
		256QAM	-38.75	24.80	-10.29	1.27	H		0.021	13.24
822.5		QPSK	-33.34	30.23	-10.26	1.28	H		0.074	18.69
		16QAM	-34.10	29.47	-10.26	1.28	H		0.062	17.93
		64QAM	-35.21	28.36	-10.26	1.28	H		0.048	16.82
		256QAM	-38.20	25.37	-10.26	1.28	H		0.024	13.83

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
816.5	LTE B26/ 5 MHz	QPSK	-33.78	29.79	-10.28	1.27	H	< 100	0.067	18.24
		16QAM	-34.54	29.03	-10.28	1.27	H		0.056	17.48
		64QAM	-35.67	27.90	-10.28	1.27	H		0.043	16.35
		256QAM	-38.72	24.85	-10.28	1.27	H		0.021	13.30
821.5		QPSK	-33.38	30.15	-10.26	1.28	H		0.073	18.61
		16QAM	-34.20	29.33	-10.26	1.28	H		0.060	17.79
		64QAM	-35.23	28.30	-10.26	1.28	H		0.047	16.76
		256QAM	-38.29	25.24	-10.26	1.28	H		0.023	13.70

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
819.0	LTE B26/ 10 MHz	QPSK	-33.76	29.77	-10.27	1.27	H	< 100	0.067	18.23
		16QAM	-34.58	28.95	-10.27	1.27	H		0.055	17.41
		64QAM	-35.63	27.90	-10.27	1.27	H		0.043	16.36
		256QAM	-38.66	24.87	-10.27	1.27	H		0.022	13.33

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
821.5	LTE B26/ 15 MHz	QPSK	-33.76	29.77	-10.26	1.28	H	< 7.00	0.067	18.23
		16QAM	-34.51	29.02	-10.26	1.28	H		0.056	17.48
		64QAM	-35.54	27.99	-10.26	1.28	H		0.044	16.45
		256QAM	-38.61	24.92	-10.26	1.28	H		0.022	13.38

Note

1. Limit: None (for reporting purposes only).

8.3 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 823.3 MHz
- ▣ MEASURED OUTPUT POWER: 20.94 dBm = 0.124 W
- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 33.94 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26697 (814.7)	1,629.40	-52.45	9.40	-63.04	1.82	H	-55.46	76.40
	2,444.10	-47.81	10.47	-52.61	2.27	H	-44.42	65.35
	3,258.80	-56.70	12.00	-58.21	2.66	H	-48.87	69.81
26783 (823.3)	1,646.60	-53.28	9.48	-63.98	1.83	H	-56.33	77.27
	2,469.90	-45.88	10.60	-50.92	2.28	H	-42.60	63.54
	3,293.20	-57.16	12.20	-58.87	2.69	H	-49.36	70.30

- ▣ OPERATING FREQUENCY: 822.5 MHz
- ▣ MEASURED OUTPUT POWER: 20.84 dBm = 0.121 W
- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10} (W) =$ 33.84 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26705 (815.5)	1,631.00	-53.18	9.40	-63.77	1.82	H	-56.19	77.04
	2,446.50	-48.98	10.47	-53.78	2.27	H	-45.59	66.43
	3,262.00	-58.10	12.00	-59.61	2.66	H	-50.27	71.12
26775 (822.5)	1,645.00	-52.88	9.48	-63.58	1.83	H	-55.93	76.78
	2,467.50	-45.68	10.60	-50.72	2.28	H	-42.40	63.24
	3,290.00	-57.77	12.20	-59.48	2.69	H	-49.97	70.81

- ▣ OPERATING FREQUENCY: 821.50 MHz
- ▣ MEASURED OUTPUT POWER: 20.76 dBm = 0.119 W
- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10} (W) =$ 33.76 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26715 (816.5)	1,633.00	-52.59	9.40	-63.18	1.82	H	-55.60	76.36
	2,449.50	-52.54	10.53	-57.50	2.27	H	-49.24	70.00
	3,266.00	-57.11	12.05	-58.58	2.67	H	-49.19	69.96
26765 (821.5)	1,643.00	-52.61	9.45	-63.23	1.83	H	-55.61	76.37
	2,464.50	-49.88	10.58	-54.76	2.28	H	-46.46	67.22
	3,286.00	-56.50	12.15	-58.30	2.69	H	-48.84	69.60

- ▣ OPERATING FREQUENCY: 819.00 MHz
- ▣ MEASURED OUTPUT POWER: 20.38 dBm = 0.109 W
- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 33.38 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26740 (819.0)	1638.00	-52.42	9.45	-63.04	1.83	H	-55.42	75.80
	2457.00	-52.86	10.55	-57.57	2.27	H	-49.29	69.68
	3276.00	-57.95	12.10	-59.61	2.68	H	-50.19	70.57

- ▣ OPERATING FREQUENCY: 821.50 MHz
- ▣ MEASURED OUTPUT POWER: 20.38 dBm = 0.109 W
- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10} (W) =$ 33.38 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26765 (821.5)	1643.00	-53.13	9.45	-63.75	1.83	H	-56.13	76.51
	2464.50	-54.46	10.58	-59.34	2.28	H	-51.04	71.42
	3286.00	-57.62	12.15	-59.42	2.69	H	-49.96	70.34

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 26	1.4 MHz	823.3	QPSK	6	0	1.0960
			16QAM			1.0991
			64QAM			1.1001
			256QAM			1.0976
	3 MHz	822.5	QPSK	15		2.7088
			16QAM			2.7135
			64QAM			2.7167
			256QAM			2.7111
	5 MHz	821.5	QPSK	25		4.5136
			16QAM			4.5123
			64QAM			4.5371
			256QAM			4.5304
	10 MHz	819.0	QPSK	50		9.0112
			16QAM			9.0027
			64QAM			8.9909
			256QAM			9.0067
	15 MHz	821.5	QPSK	75		13.478
			16QAM			13.422
			64QAM			13.444
			256QAM			13.450

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 45 ~ 64.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	814.7	3.6760	27.976	-67.369	-39.393	-13.00
		823.3	3.6795	27.976	-67.095	-39.119	
	3	815.5	3.7069	27.976	-67.192	-39.216	
		822.5	3.7015	27.976	-67.203	-39.227	
	5	816.5	3.6855	27.976	-67.526	-39.550	
		821.5	3.7139	27.976	-67.155	-39.179	
	10	819.0	3.7109	27.976	-67.242	-39.266	
	15	821.5	3.6750	27.976	-67.351	-39.375	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 85 ~ 92.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.6 CHANNEL EDGE

- Plots of the EUT's Band Edge are shown Page 65 ~ 84.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 814,700,000 Hz
- ▣ CHANNEL: 26697(1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	814 700 005	0.0	0.000 000	0.000
100%		-30	814 700 010	4.7	0.000 001	0.006
100%		-20	814 700 010	5.0	0.000 001	0.006
100%		-10	814 700 011	5.4	0.000 001	0.007
100%		0	814 700 014	8.7	0.000 001	0.011
100%		+10	814 700 001	-4.3	-0.000 001	-0.005
100%		+30	814 700 011	6.2	0.000 001	0.008
100%		+40	814 700 011	5.3	0.000 001	0.007
100%		+50	814 700 012	7.0	0.000 001	0.009
Batt. Endpoint		3.600	+20	814 700 001	-4.5	-0.000 001

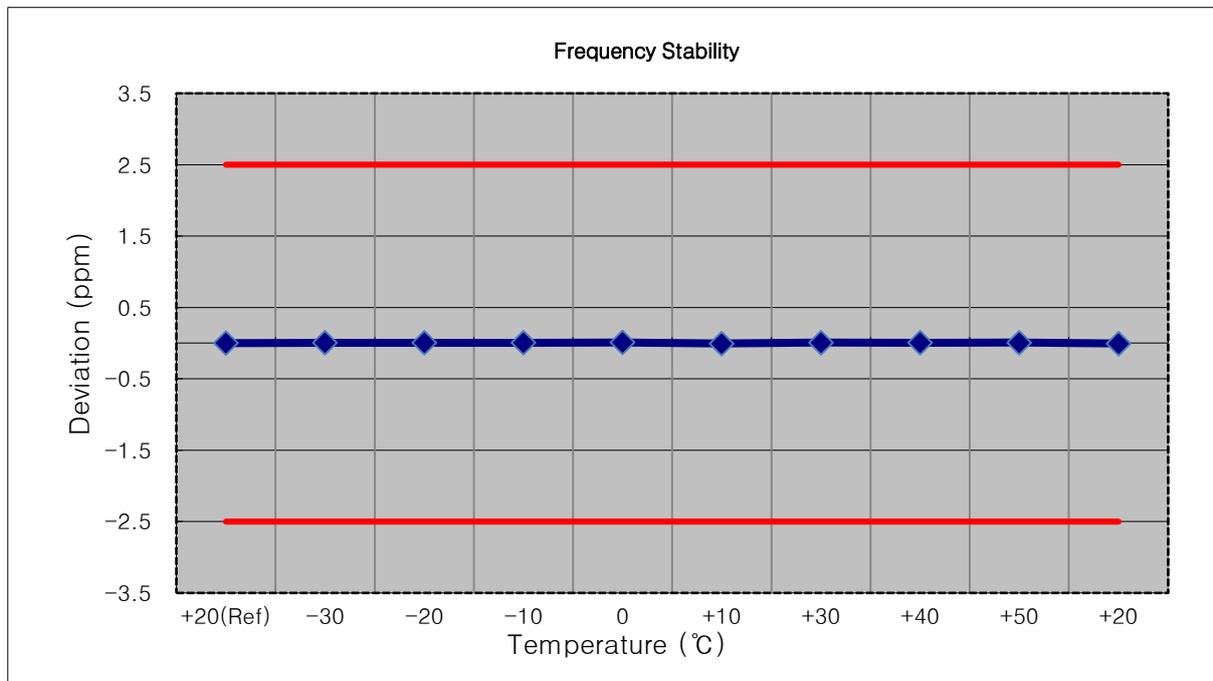


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 815,500,000 Hz
- ▣ CHANNEL: 26705(3 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	815 499 994	0.0	0.000 000	0.000
100%		-30	815 499 999	5.6	0.000 001	0.007
100%		-20	815 500 000	6.0	0.000 001	0.007
100%		-10	815 499 999	5.5	0.000 001	0.007
100%		0	815 499 987	-6.5	-0.000 001	-0.008
100%		+10	815 499 999	4.9	0.000 001	0.006
100%		+30	815 500 000	6.3	0.000 001	0.008
100%		+40	815 499 987	-6.9	-0.000 001	-0.008
100%		+50	815 500 000	6.4	0.000 001	0.008
Batt. Endpoint		3.600	+20	815 499 999	5.7	0.000 001

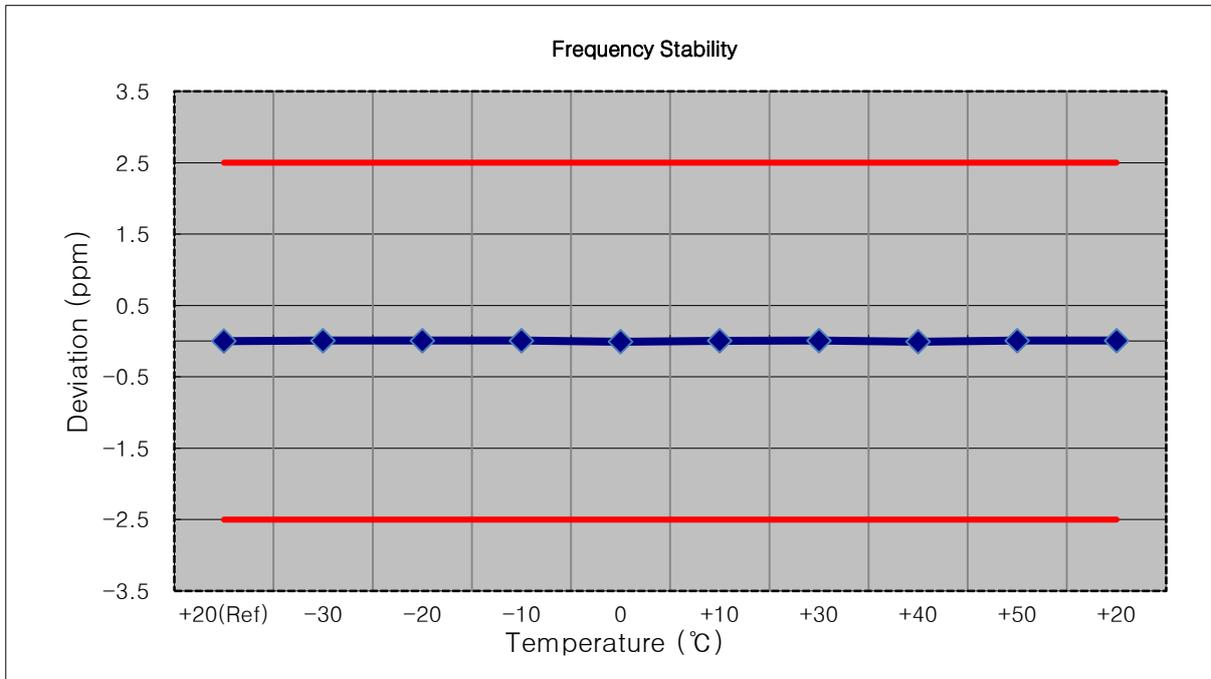


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 816.500.000 Hz
- ▣ CHANNEL: 26715(5MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	816 499 995	0.0	0.000 000	0.000
100%		-30	816 500 001	6.0	0.000 001	0.007
100%		-20	816 500 001	5.4	0.000 001	0.007
100%		-10	816 500 002	7.0	0.000 001	0.009
100%		0	816 500 000	4.3	0.000 001	0.005
100%		+10	816 500 000	4.6	0.000 001	0.006
100%		+30	816 500 000	5.0	0.000 001	0.006
100%		+40	816 500 001	5.9	0.000 001	0.007
100%		+50	816 500 002	6.4	0.000 001	0.008
Batt. Endpoint		3.600	+20	816 499 999	3.8	0.000 000

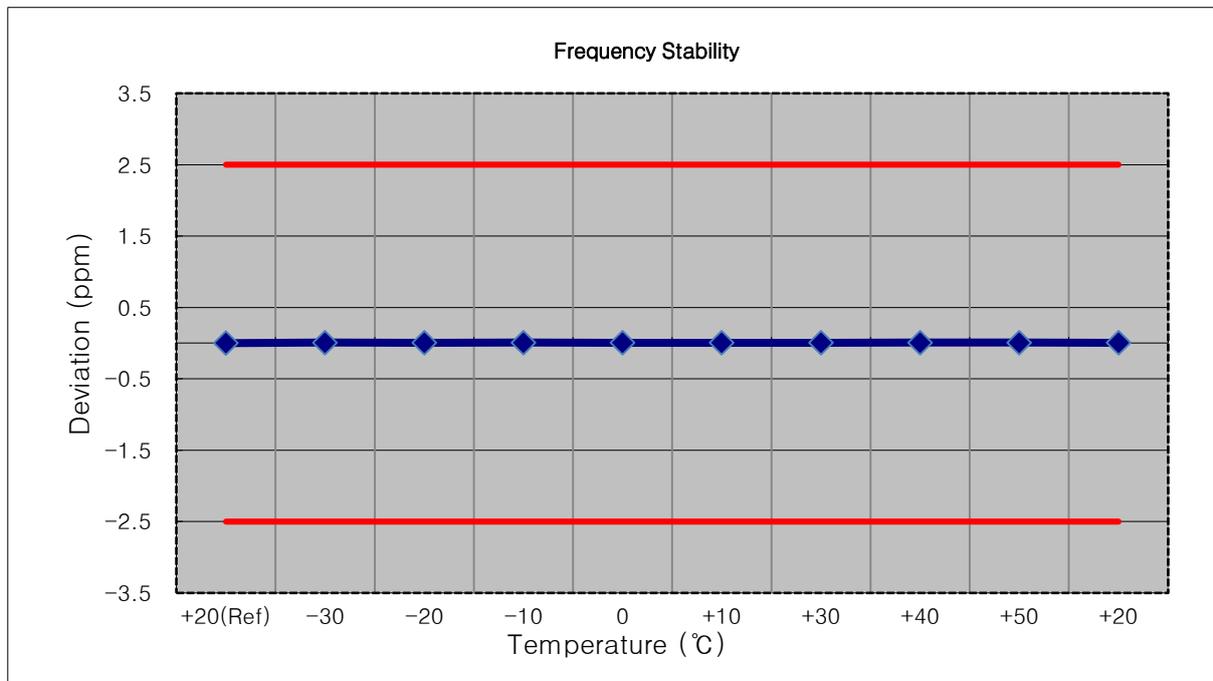


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 819.000.000 Hz
- ▣ CHANNEL: 26740(10 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	819 000 004	0.0	0.000 000	0.000
100%		-30	819 000 010	5.1	0.000 001	0.006
100%		-20	819 000 010	5.6	0.000 001	0.007
100%		-10	819 000 000	-4.1	-0.000 001	-0.005
100%		0	819 000 011	6.8	0.000 001	0.008
100%		+10	819 000 010	5.9	0.000 001	0.007
100%		+30	819 000 010	5.3	0.000 001	0.006
100%		+40	819 000 009	4.2	0.000 001	0.005
100%		+50	819 000 008	3.9	0.000 000	0.005
Batt. Endpoint		3.600	+20	819 000 009	4.9	0.000 001

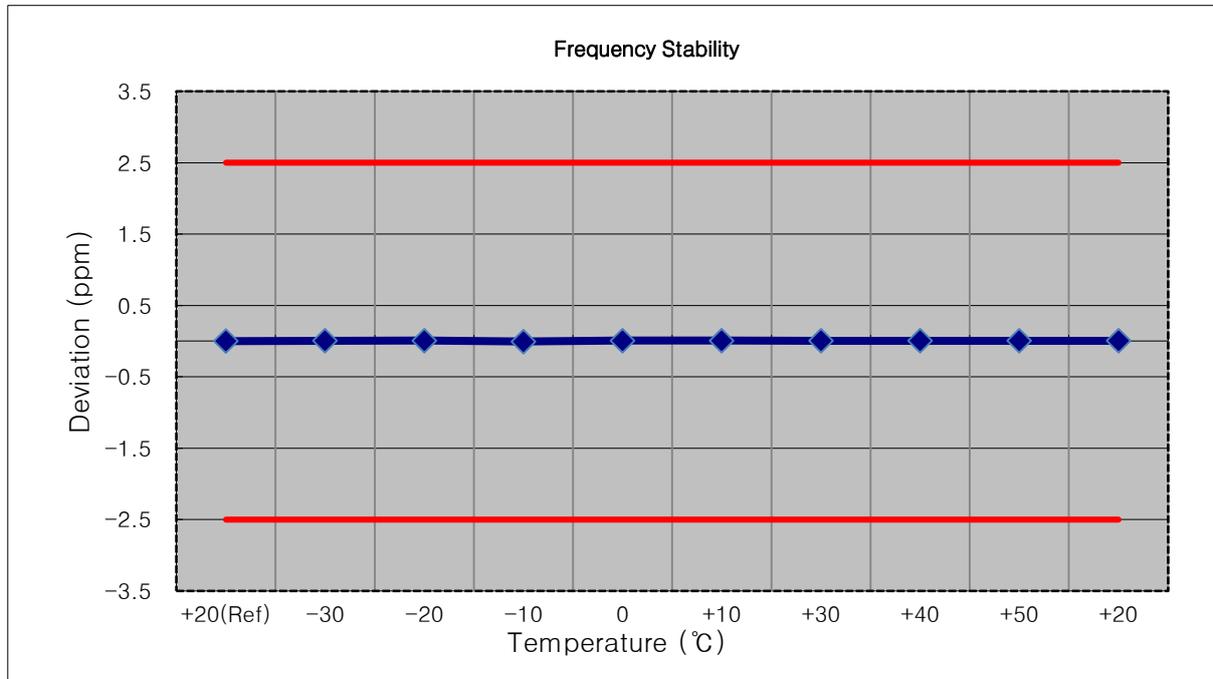

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 821,500,000 Hz
- ▣ CHANNEL: 26765(15 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	821 500 004	0.0	0.000 000	0.000
100%		-30	821 500 000	-4.2	-0.000 001	-0.005
100%		-20	821 500 010	5.3	0.000 001	0.006
100%		-10	821 500 009	4.9	0.000 001	0.006
100%		0	821 500 009	4.8	0.000 001	0.006
100%		+10	821 500 010	5.7	0.000 001	0.007
100%		+30	821 500 000	-4.2	-0.000 001	-0.005
100%		+40	821 500 010	5.3	0.000 001	0.006
100%		+50	821 500 010	6.1	0.000 001	0.007
Batt. Endpoint		3.600	+20	821 500 009	5.2	0.000 001

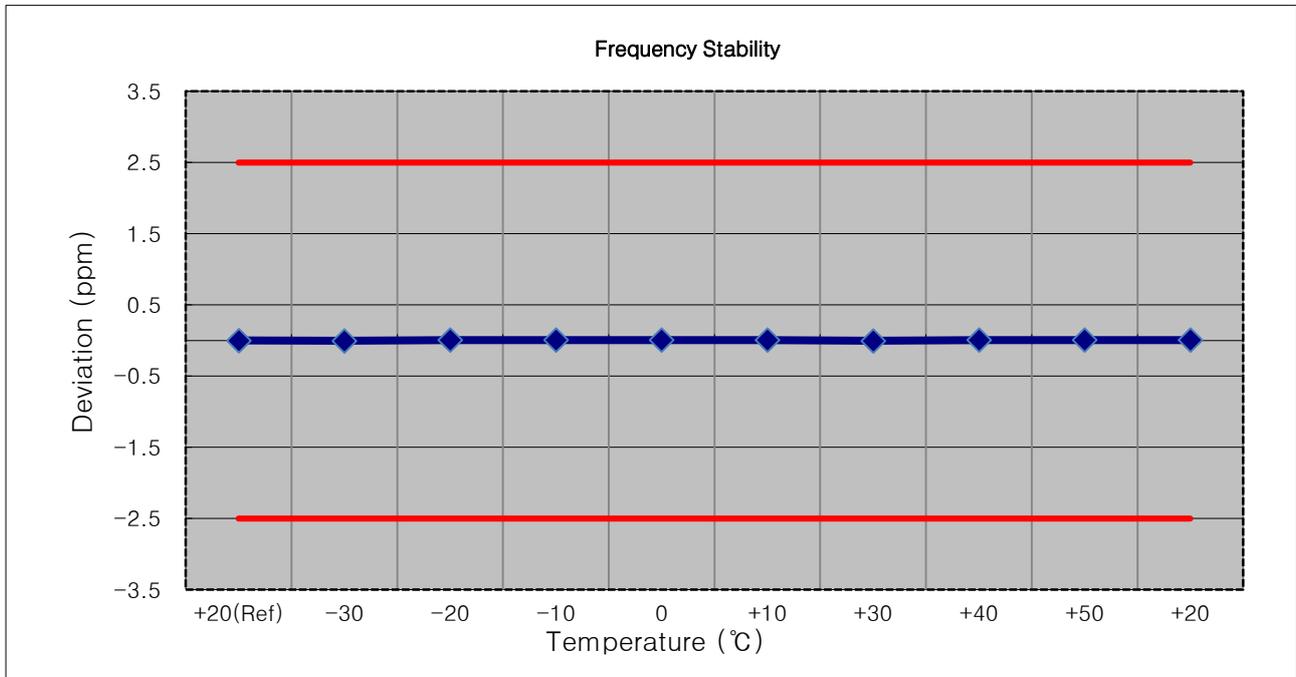

8.8 STADDLE CHANNEL

8.8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.0	LTE B26/ 1.4 MHz	QPSK	-33.39	30.22	-10.25	1.28	H	< 7.00	0.074	18.69
		16QAM	-34.19	29.42	-10.25	1.28	H		0.062	17.89
		64QAM	-35.23	28.38	-10.25	1.28	H		0.048	16.85
		256QAM	-38.14	25.47	-10.25	1.28	H		0.025	13.94

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.0	LTE B26/ 3 MHz	QPSK	-33.39	30.22	-10.25	1.28	H	< 7.00	0.074	18.69
		16QAM	-34.19	29.42	-10.25	1.28	H		0.062	17.89
		64QAM	-35.22	28.39	-10.25	1.28	H		0.049	16.86
		256QAM	-38.24	25.37	-10.25	1.28	H		0.024	13.84

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.0	LTE B26/ 5 MHz	QPSK	-33.35	30.26	-10.25	1.28	H	< 7.00	0.075	18.73
		16QAM	-34.14	29.47	-10.25	1.28	H		0.062	17.94
		64QAM	-35.26	28.35	-10.25	1.28	H		0.048	16.82
		256QAM	-38.23	25.38	-10.25	1.28	H		0.024	13.85

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
								W	W	dBm
824.0	LTE B26/ 10 MHz	QPSK	-33.41	30.20	-10.25	1.28	H	< 7.00	0.074	18.67
		16QAM	-34.26	29.35	-10.25	1.28	H		0.061	17.82
		64QAM	-35.28	28.33	-10.25	1.28	H		0.048	16.80
		256QAM	-38.34	25.27	-10.25	1.28	H		0.024	13.74

8.8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 824.00 MHz
- ▣ MEASURED OUTPUT POWER: 20.84 dBm = 0.121 W
- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 33.84 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26790 (824.0)	1,648.00	-53.35	9.50	-64.11	1.84	H	-56.45	77.30
	2,472.00	-44.75	10.60	-49.79	2.28	H	-41.47	62.31
	3,296.00	-57.97	12.25	-59.79	2.69	H	-50.23	71.08

- ▣ OPERATING FREQUENCY: 824.00 MHz
- ▣ MEASURED OUTPUT POWER: 20.84 dBm = 0.121 W
- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 33.84 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26790 (824.0)	1,648.00	-52.59	9.50	-63.35	1.84	H	-55.69	76.54
	2,472.00	-45.67	10.60	-50.71	2.28	H	-42.39	63.23
	3,296.00	-58.33	12.25	-60.15	2.69	H	-50.59	71.44

- ▣ OPERATING FREQUENCY: 824.00 MHz
- ▣ MEASURED OUTPUT POWER: 20.88 dBm = 0.122 W
- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 33.88 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26790 (824.0)	1,648.00	-52.31	9.50	-63.07	1.84	H	-55.41	76.30
	2,472.00	-48.99	10.60	-54.03	2.28	H	-45.71	66.59
	3,296.00	-57.49	12.25	-59.31	2.69	H	-49.75	70.64

- ▣ OPERATING FREQUENCY: 824.00 MHz
- ▣ MEASURED OUTPUT POWER: 20.82 dBm = 0.121 W
- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 33.82 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26790 (824.0)	1,648.00	-52.80	9.50	-63.56	1.84	H	-55.90	76.73
	2,472.00	-53.19	10.60	-58.23	2.28	H	-49.91	70.73
	3,296.00	-57.00	12.25	-58.82	2.69	H	-49.26	70.09

8.8.3 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	824.0	3.1945	27.976	-67.069	-39.093	-13.00
	3		3.7129	27.976	-67.435	-39.459	
	5		3.1840	27.976	-67.243	-39.267	
	10		3.6850	27.976	-66.929	-38.953	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 94 ~ 97.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131

8.8.4 CHANNEL EDGE(Part90)


- Test Channel : 26790(824.0MHz)
- Plots of the EUT's Band Edge are shown Page 98 ~ 109.

8.8.5 BAND EDGE(Part22)


- Test Channel : 26790(824.0MHz)
- Plots of the EUT's Band Edge are shown Page 110 ~ 117.

9. TEST PLOTS


BAND 26. Occupied Bandwidth Plot (1.4M BW Ch.26783 QPSK RB 6_0)

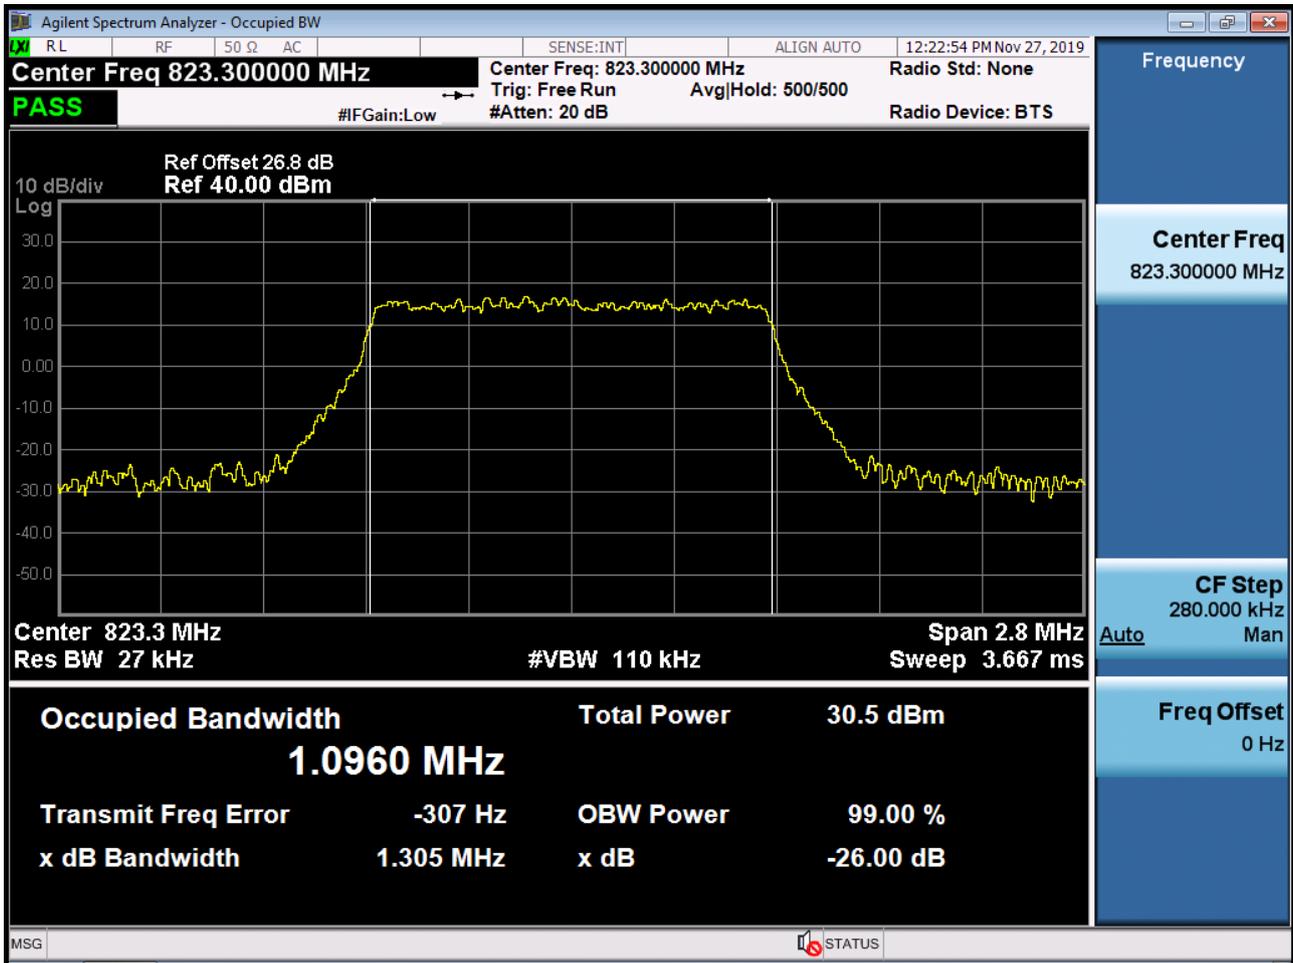


BAND 26. Occupied Bandwidth Plot (1.4M BW Ch.26783 16QAM RB 6_0)

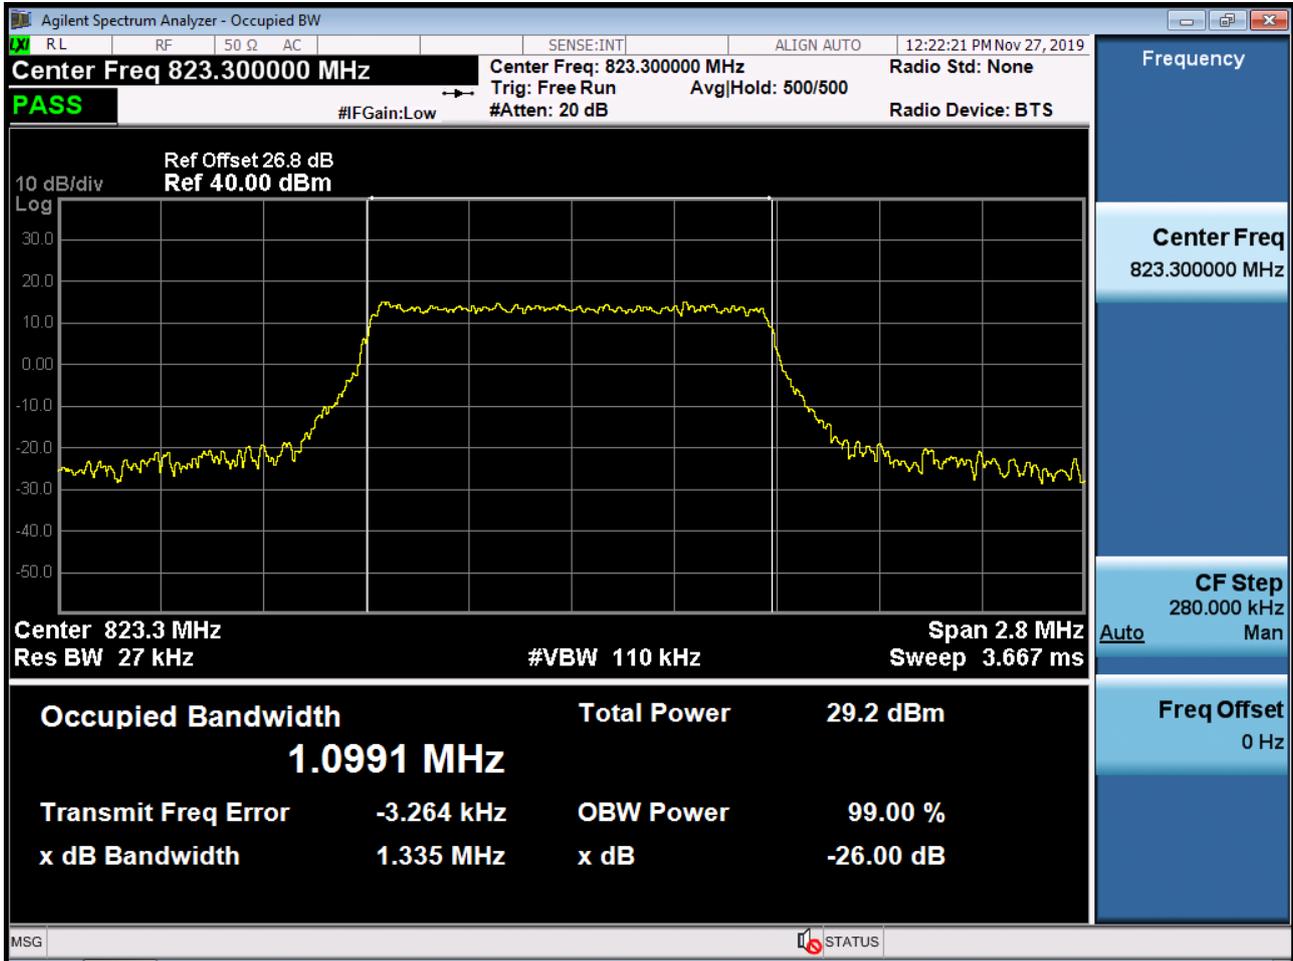


BAND 26. Occupied Bandwidth Plot (1.4M BW Ch.26783 64QAM RB 6_0)

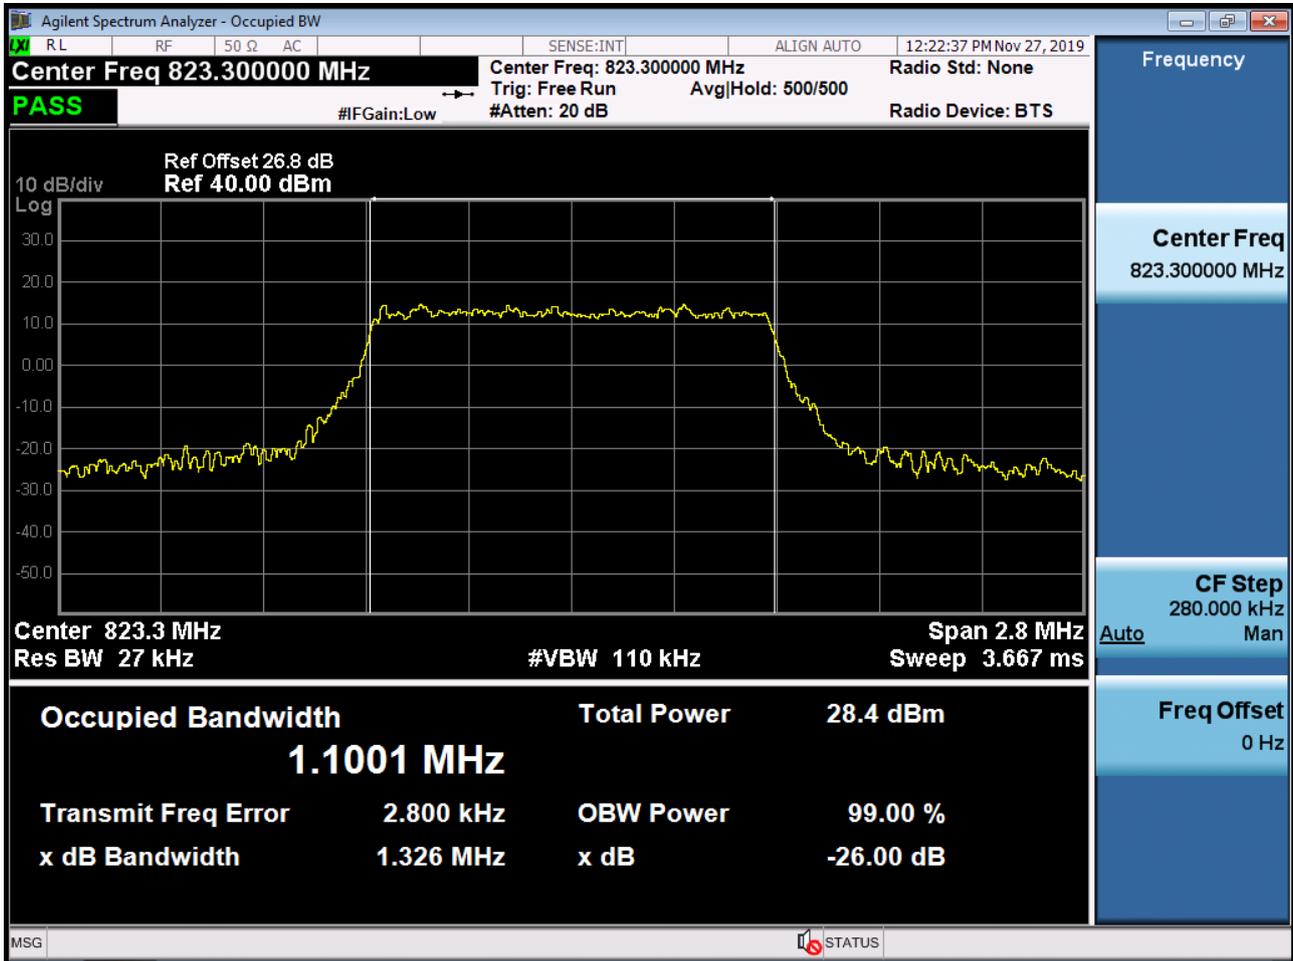


BAND 26. Occupied Bandwidth Plot (1.4M BW Ch.26783 256QAM RB 6_0)

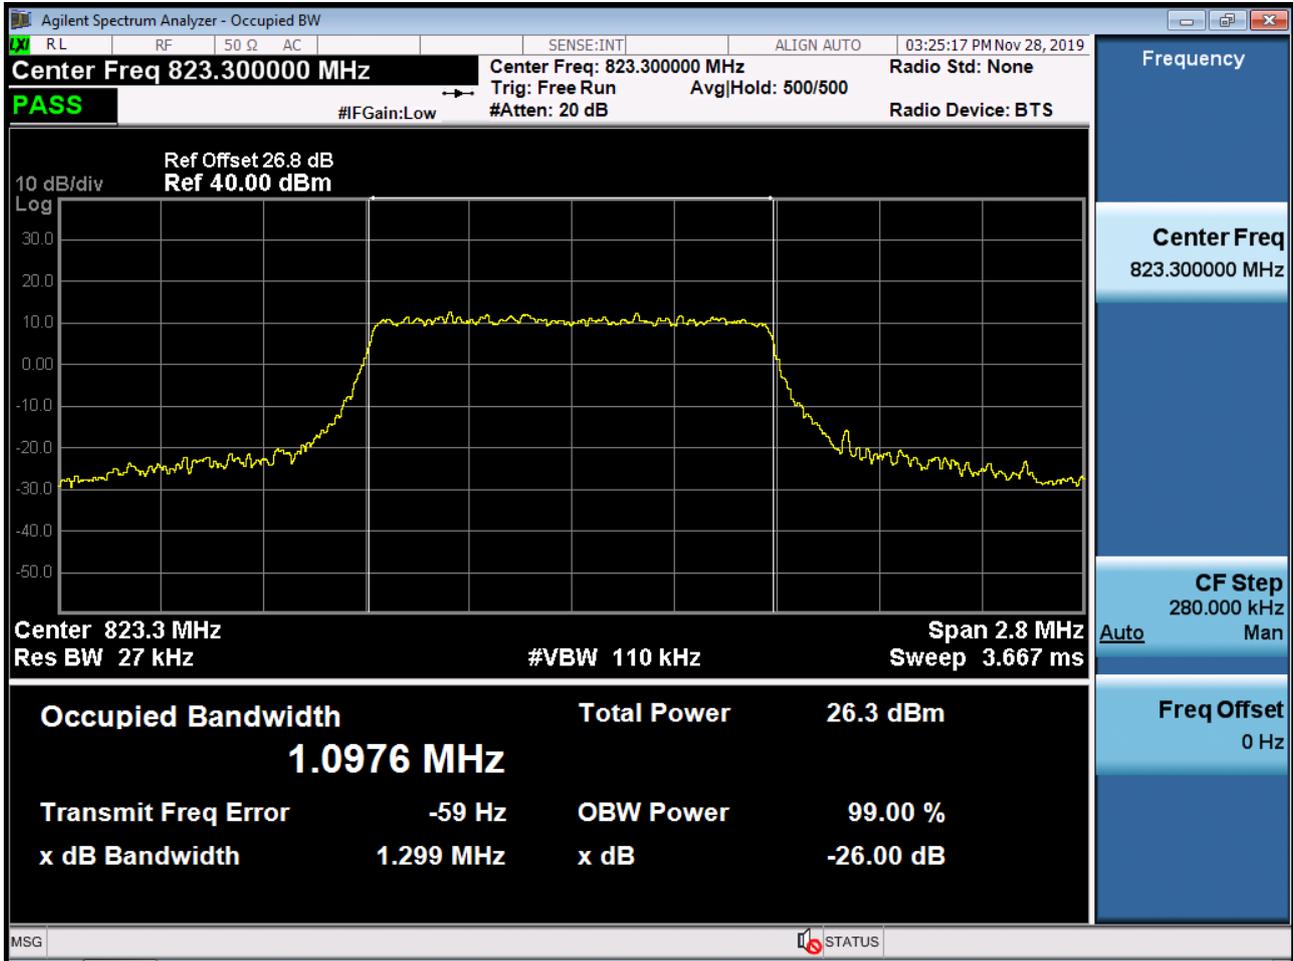


BAND 26. Occupied Bandwidth Plot (3M BW Ch.26775 QPSK RB 15_0)

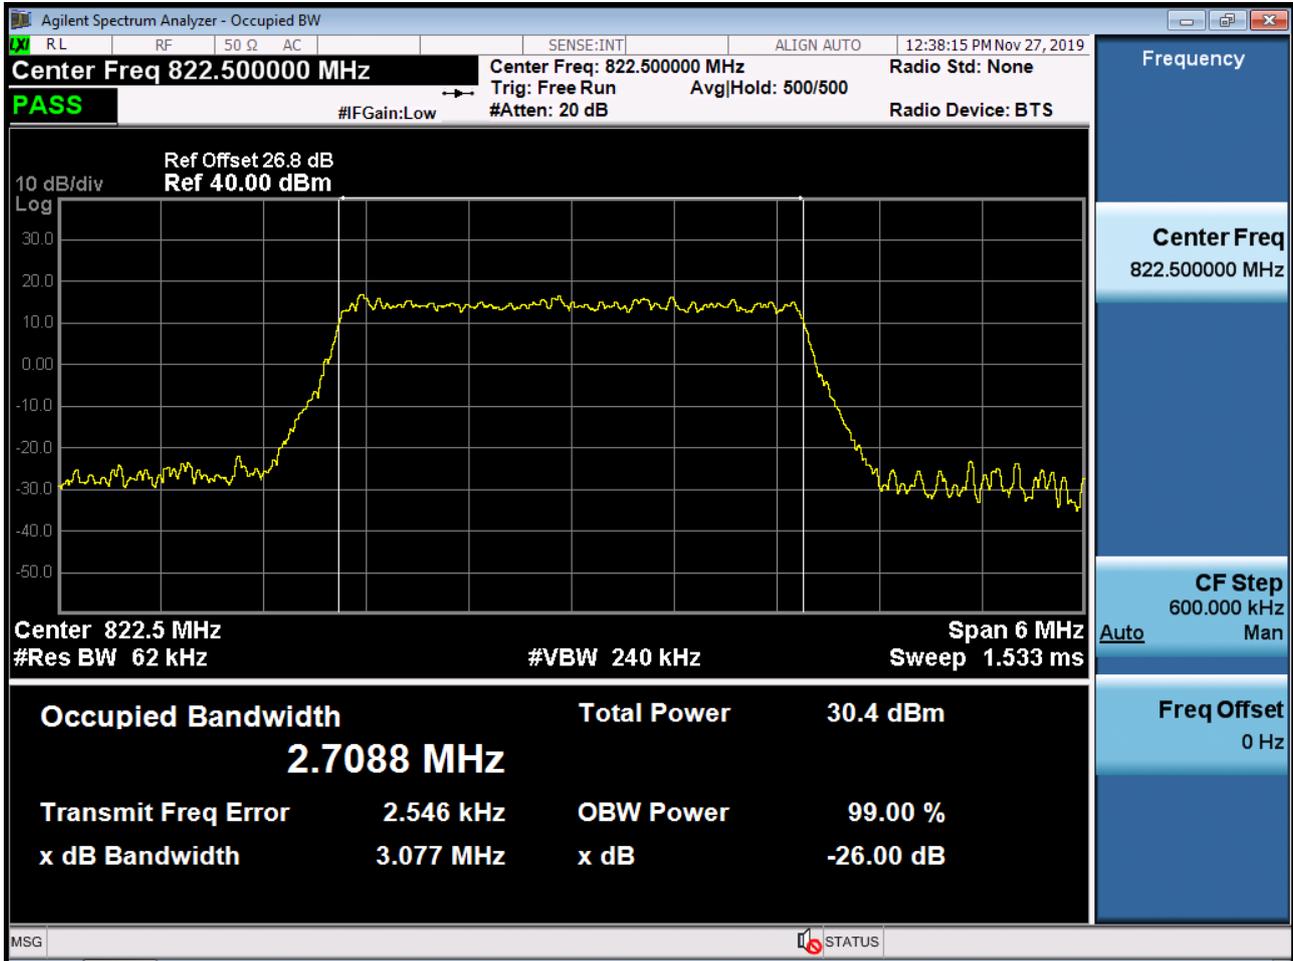


BAND 26. Occupied Bandwidth Plot (3M BW Ch.26775 16QAM RB 15_0)

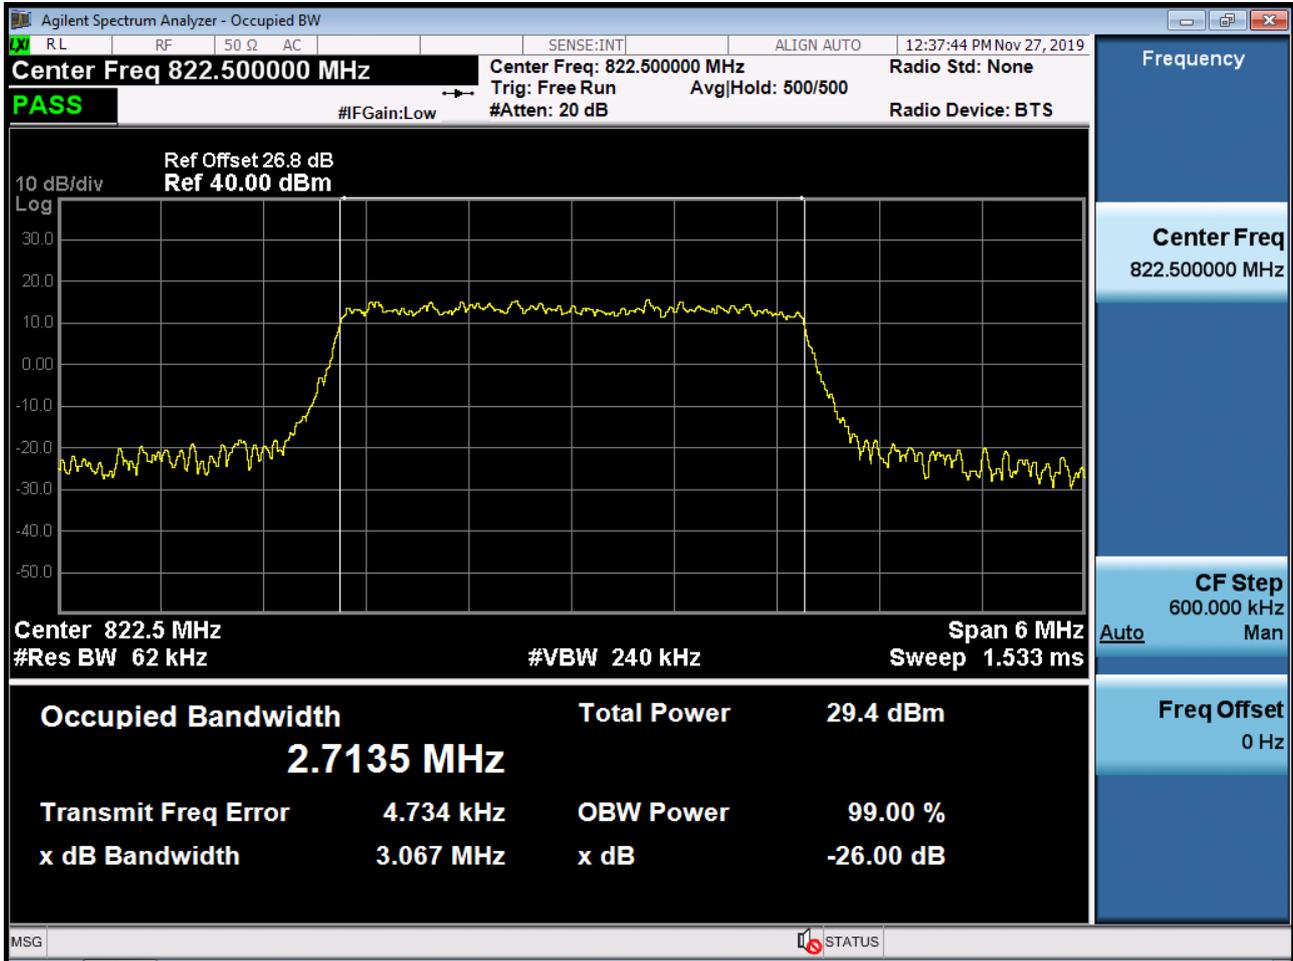


BAND 26. Occupied Bandwidth Plot (3M BW Ch.26775 64QAM RB 15_0)

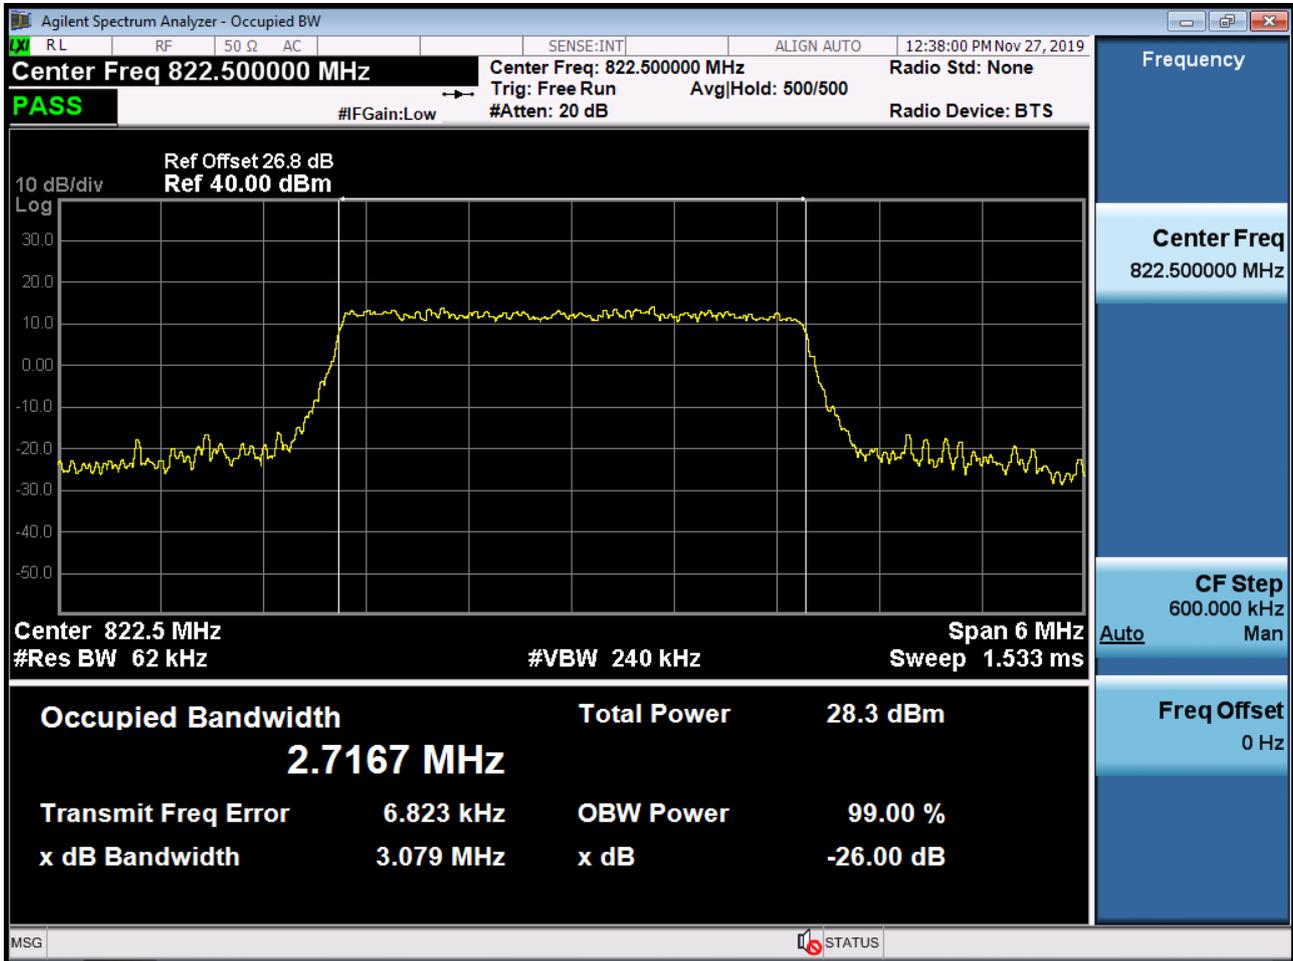


BAND 26. Occupied Bandwidth Plot (3M BW Ch.26775 256QAM RB 15_0)

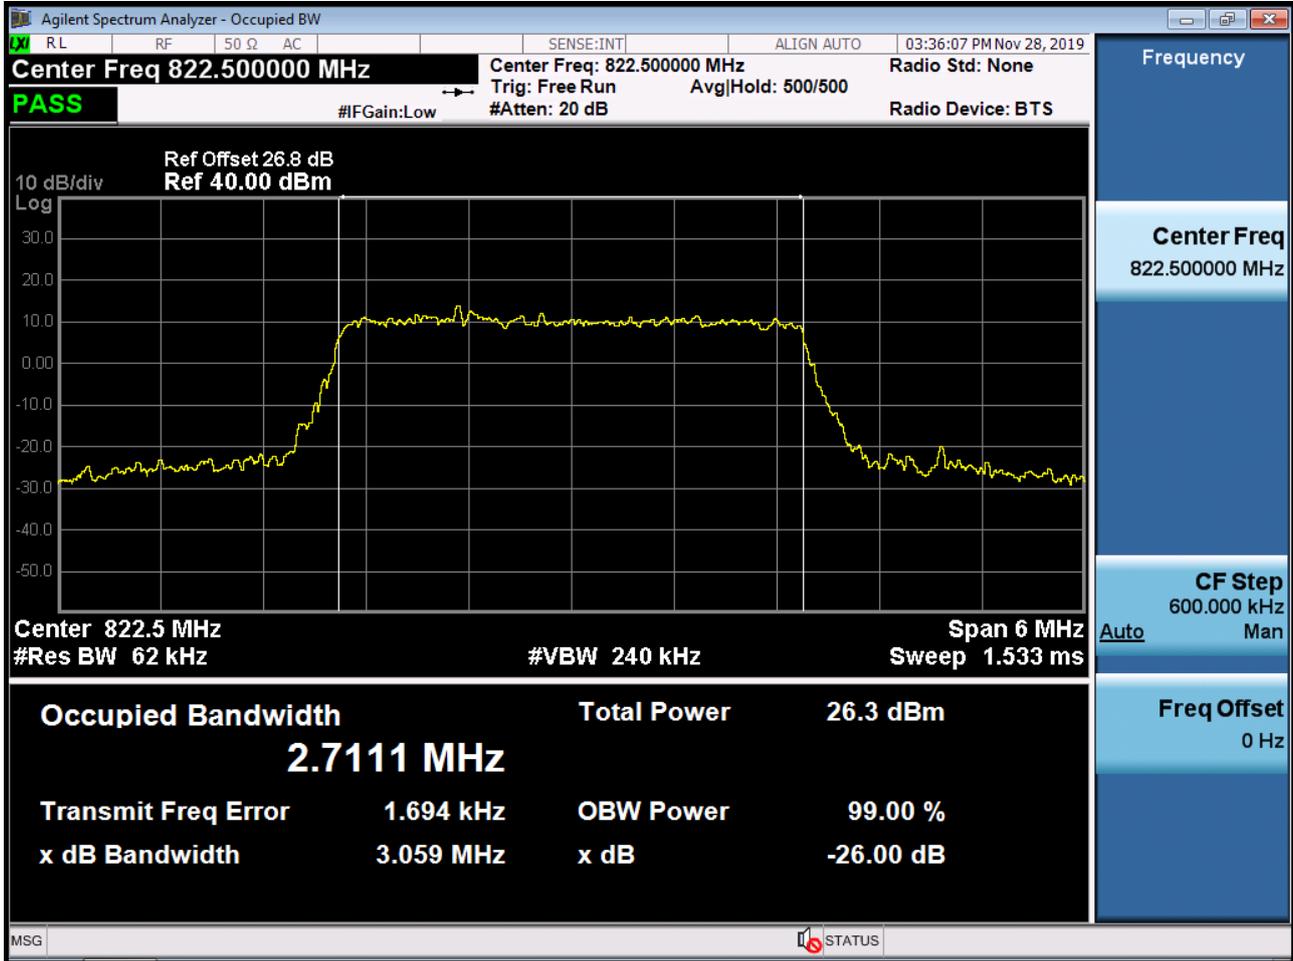


BAND 26. Occupied Bandwidth Plot (5M BW Ch.26765 QPSK RB 25_0)

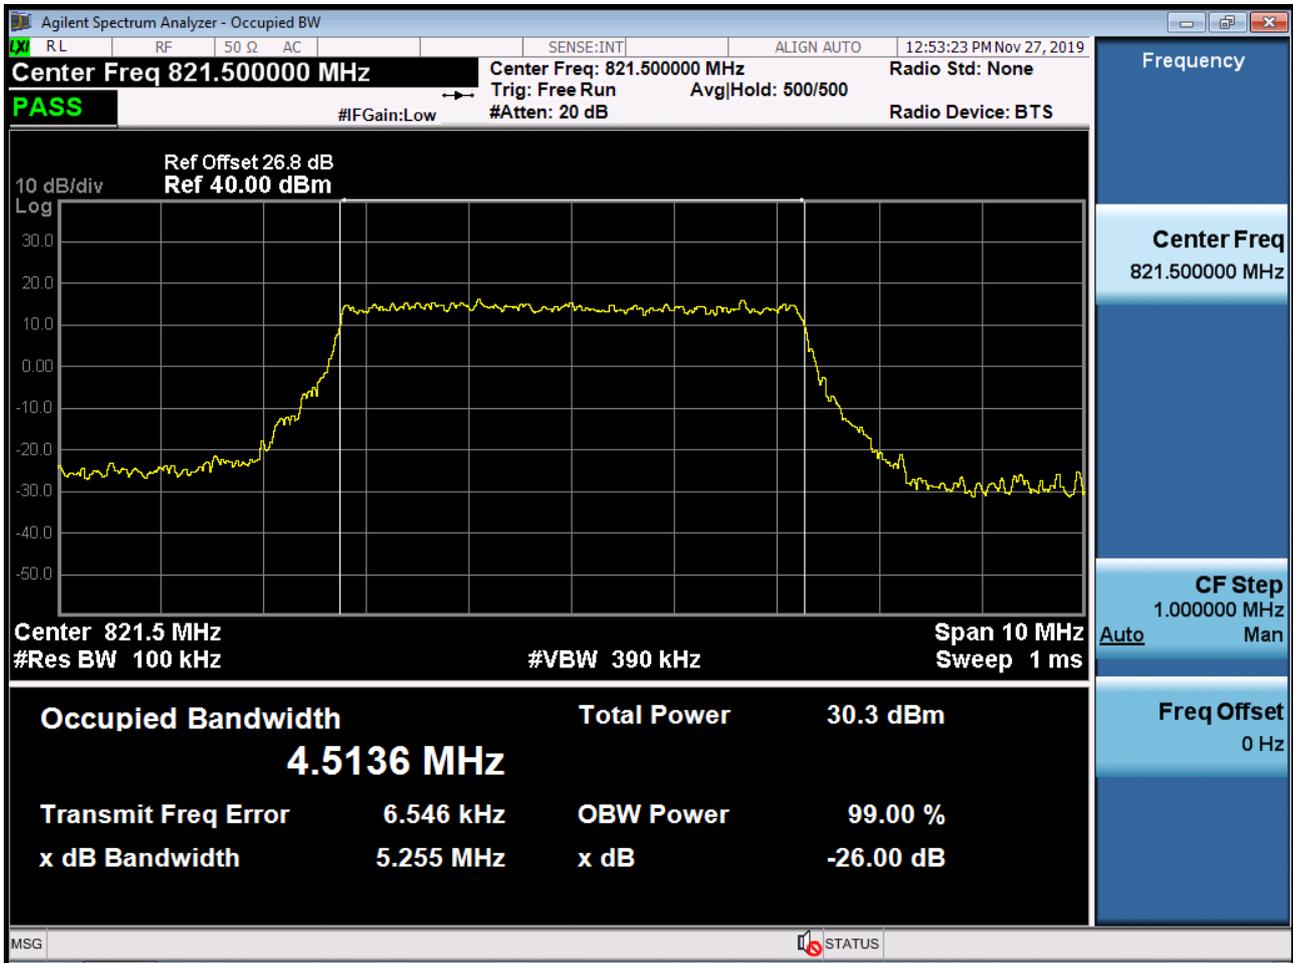


BAND 26. Occupied Bandwidth Plot (5M BW Ch.26765 16QAM RB 25_0)

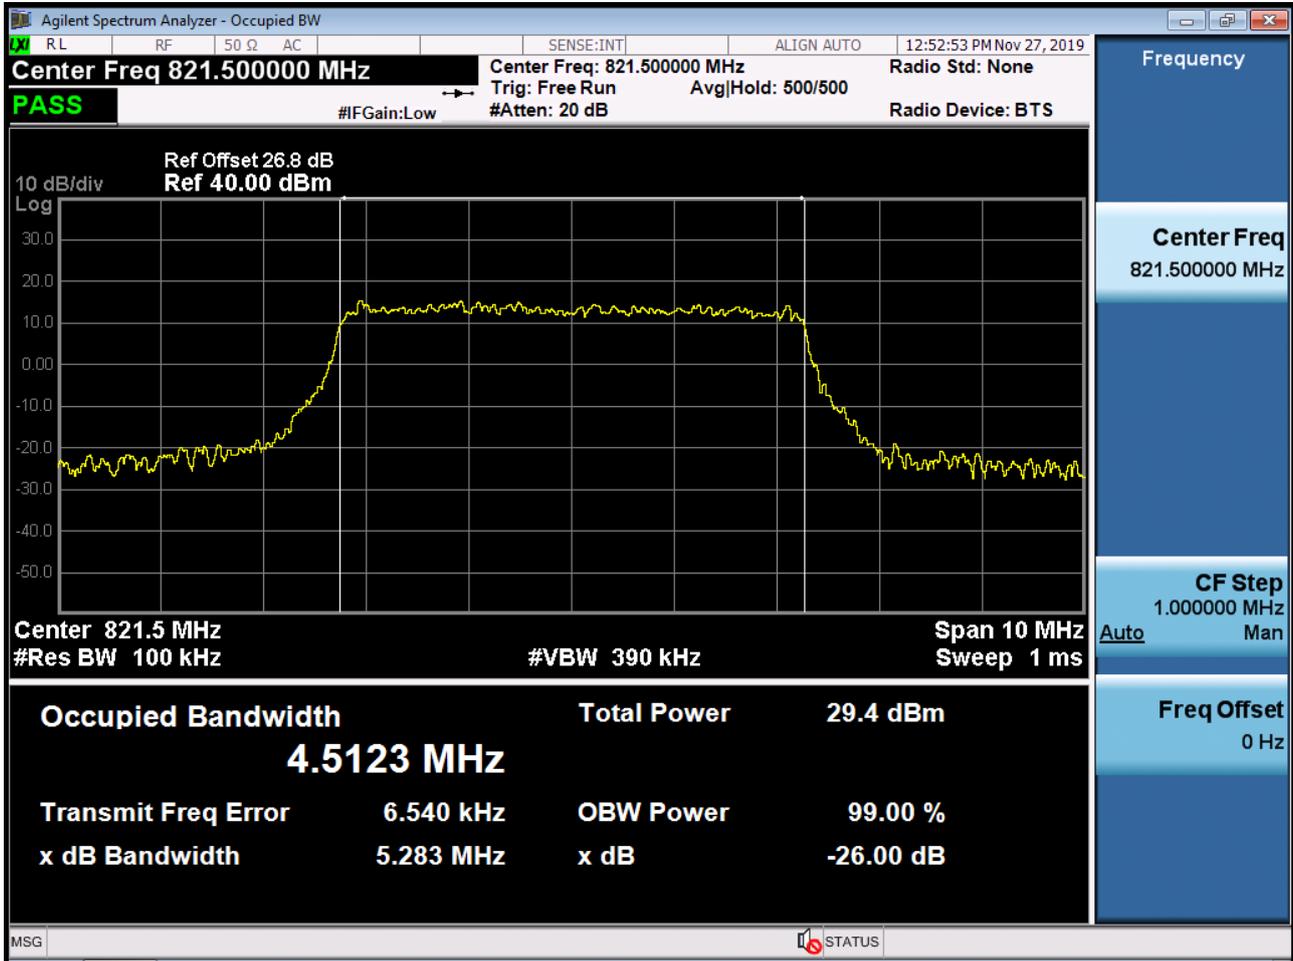


BAND 26. Occupied Bandwidth Plot (5M BW Ch.26765 64QAM RB 25_0)

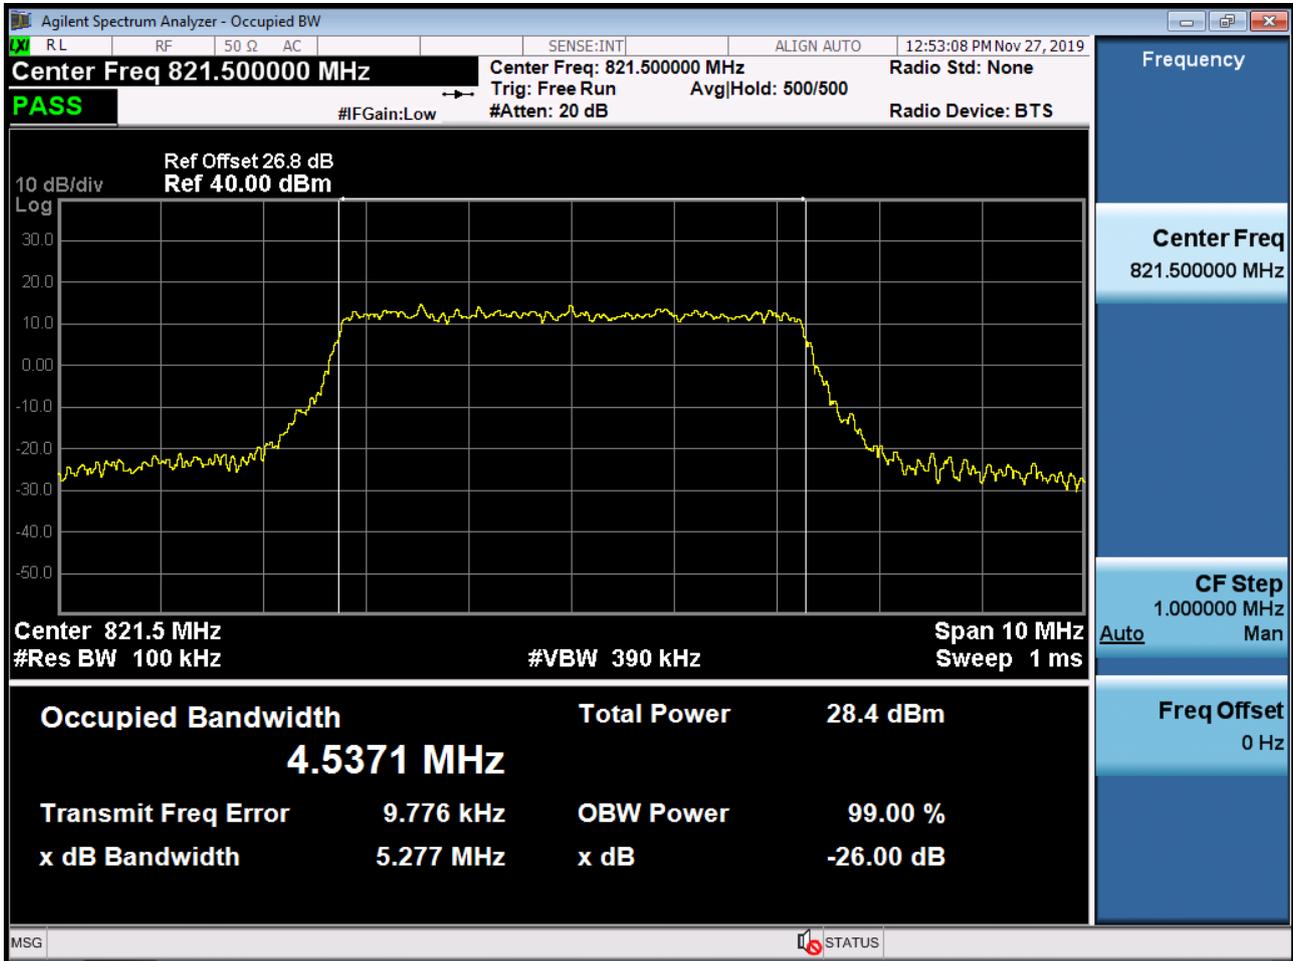


BAND 26. Occupied Bandwidth Plot (5M BW Ch.26765 256QAM RB 25_0)

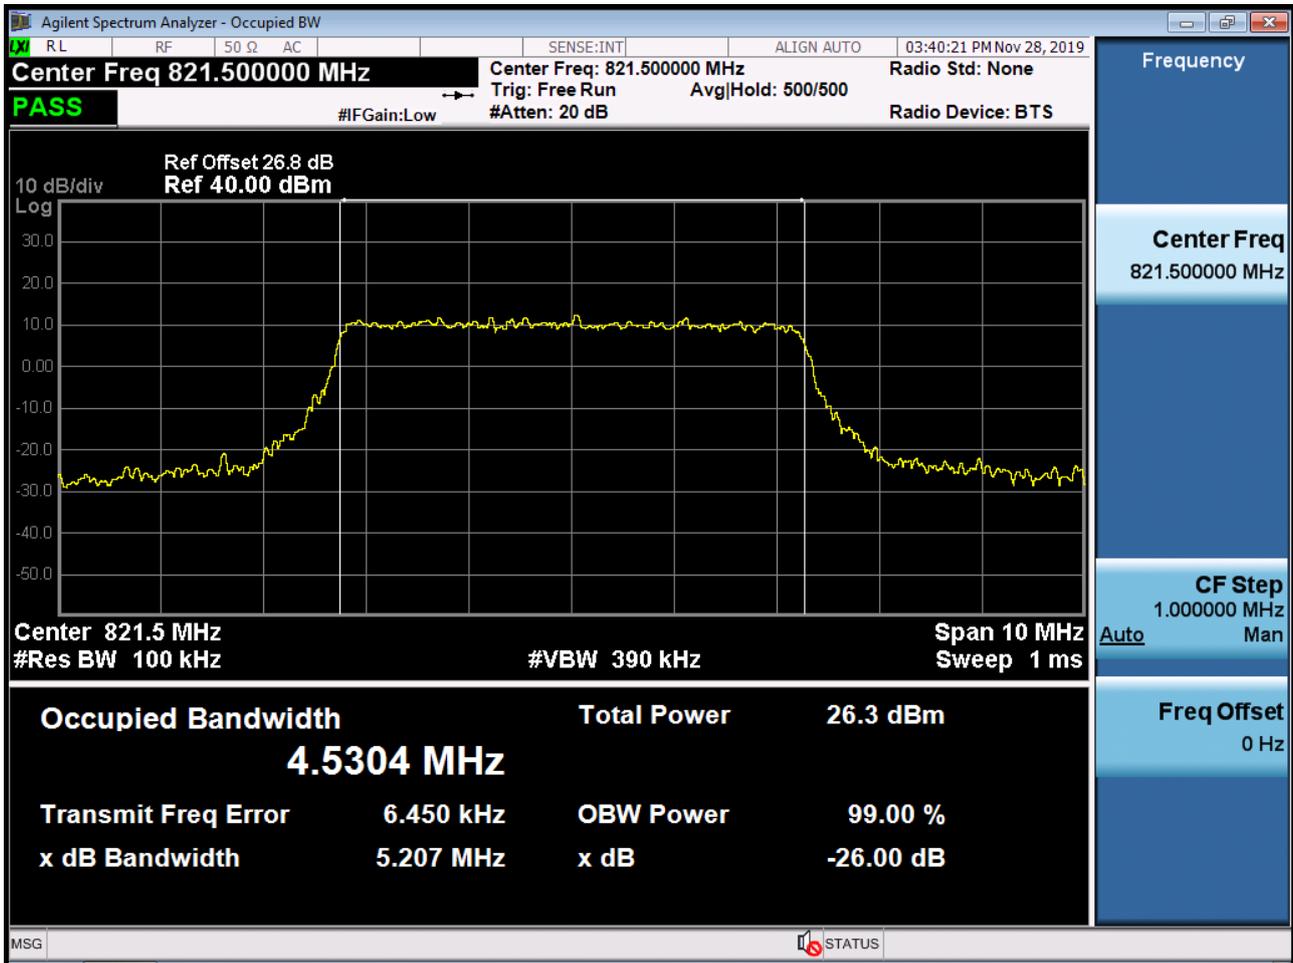


BAND 26. Occupied Bandwidth Plot (10M BW Ch.26740 QPSK RB 50_0)

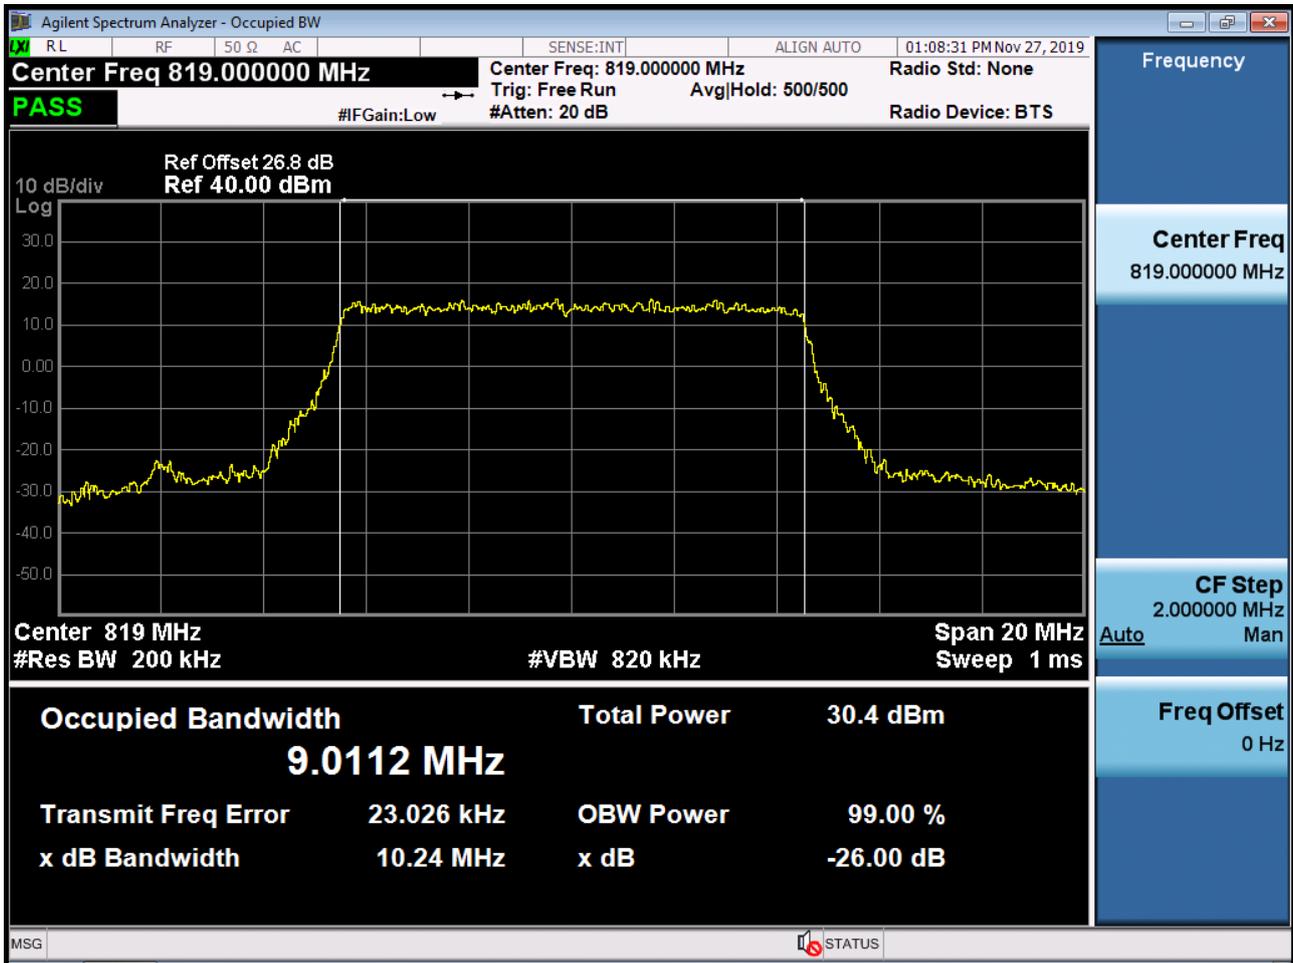


BAND 26. Occupied Bandwidth Plot (10M BW Ch.26740 16QAM RB 50_0)

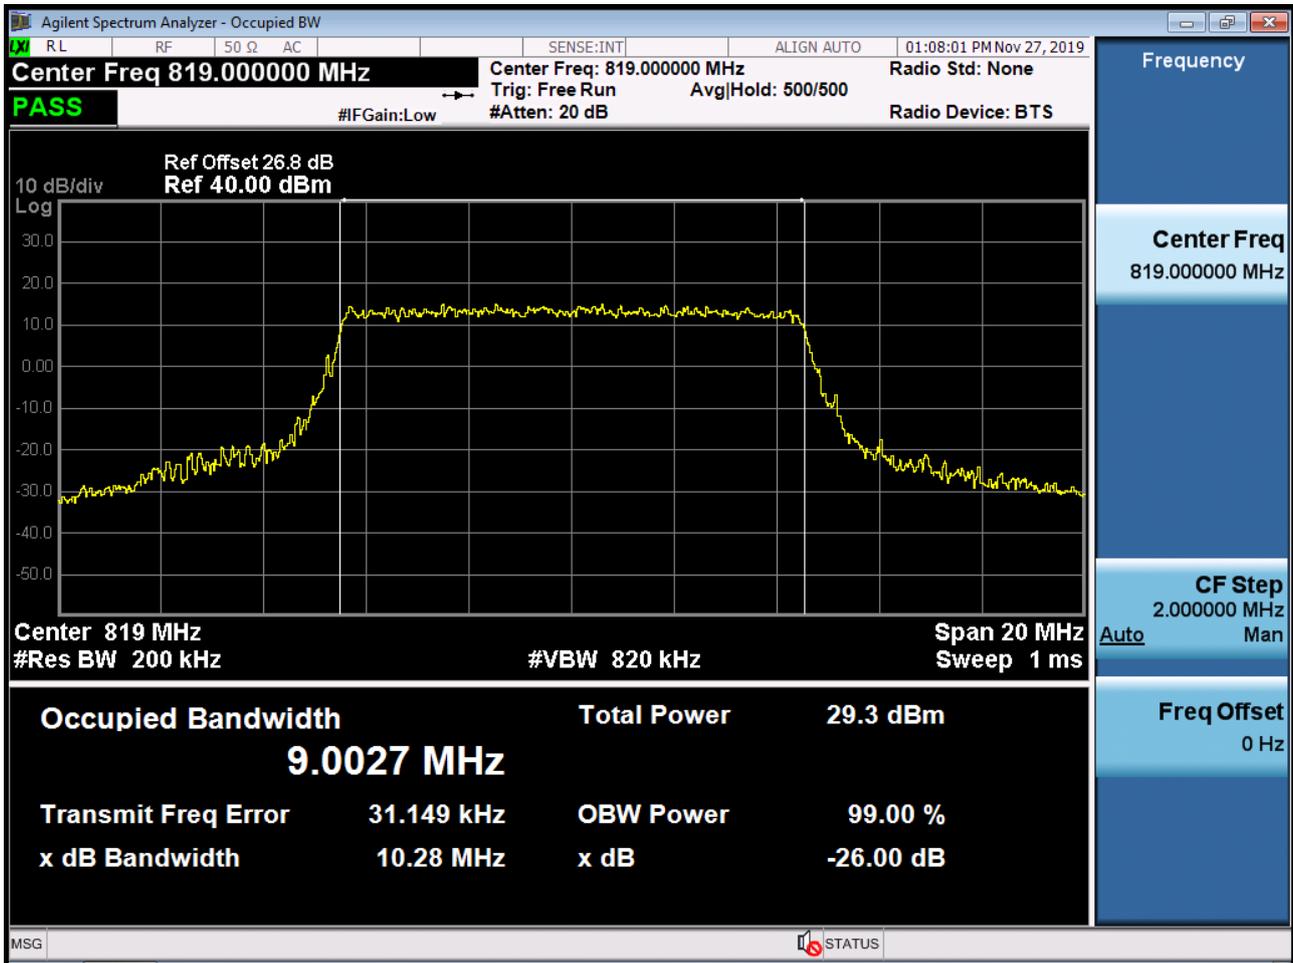


BAND 26. Occupied Bandwidth Plot (10M BW Ch.26740 64QAM RB 50_0)

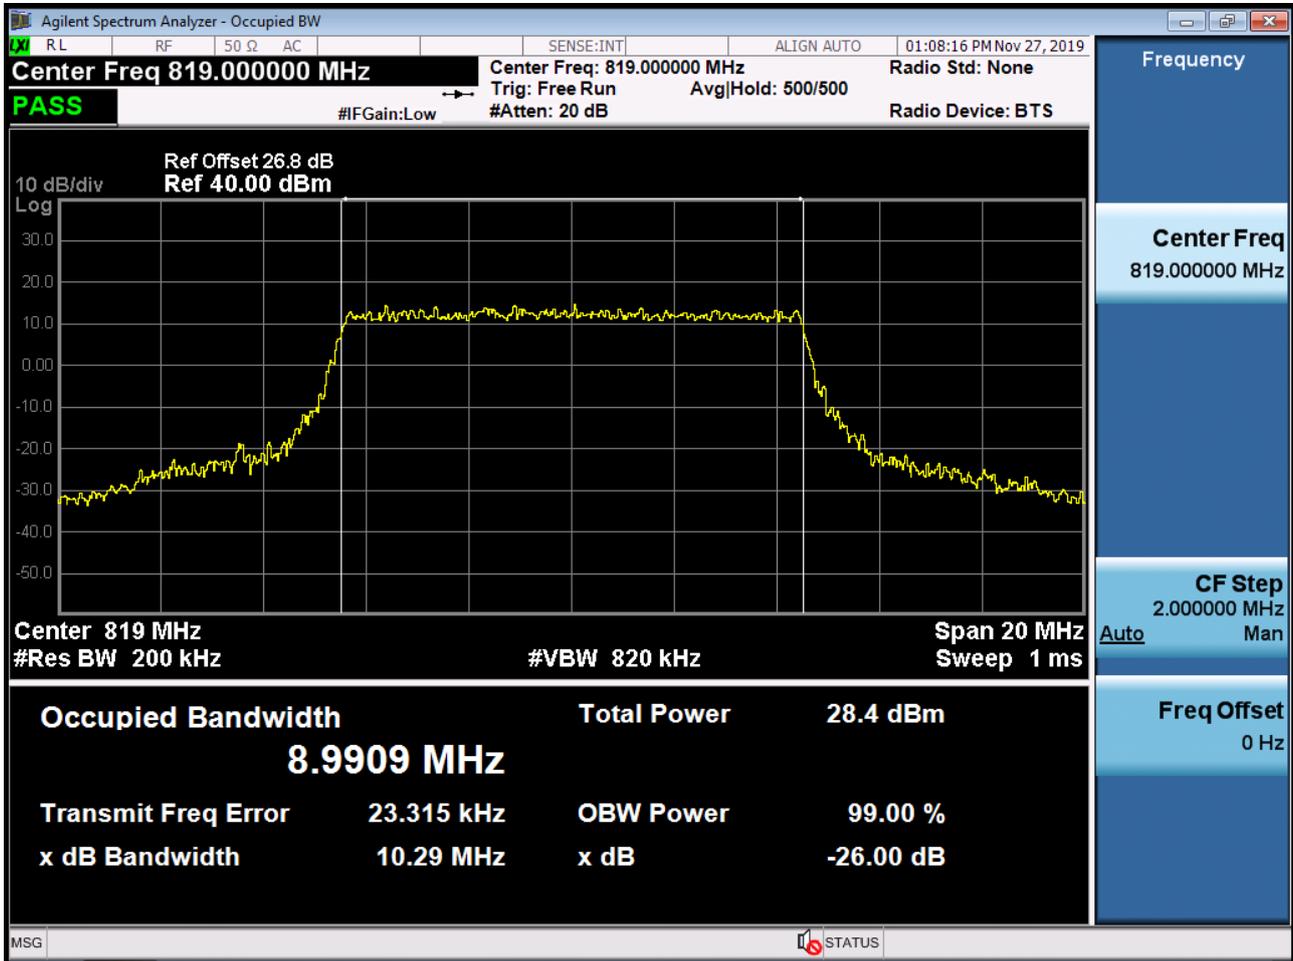


BAND 26. Occupied Bandwidth Plot (10M BW Ch.26740 256QAM RB 50_0)

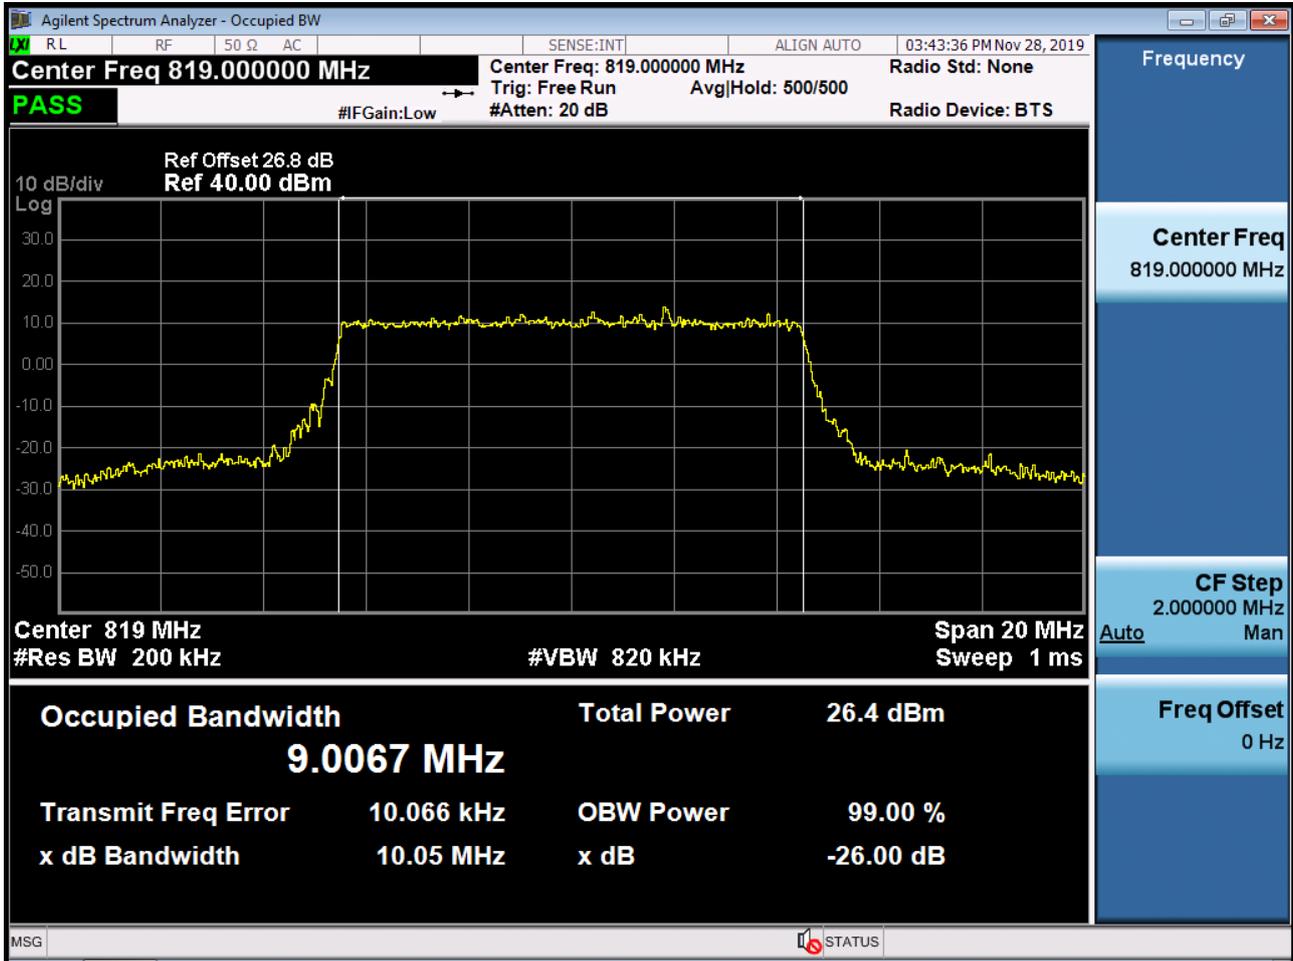


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26765 QPSK RB 75_0)

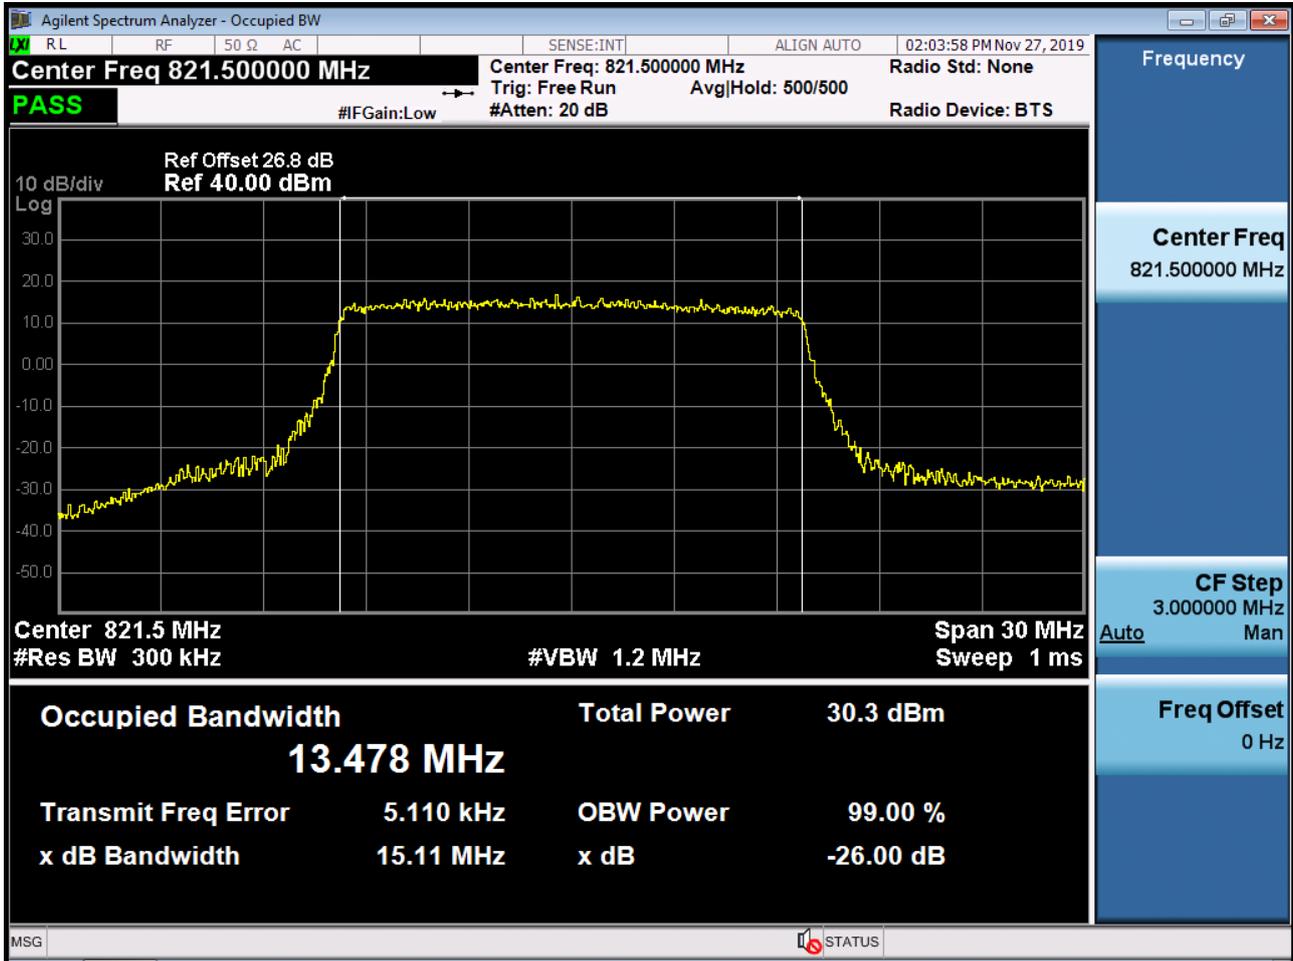


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26765 16QAM RB 75_0)

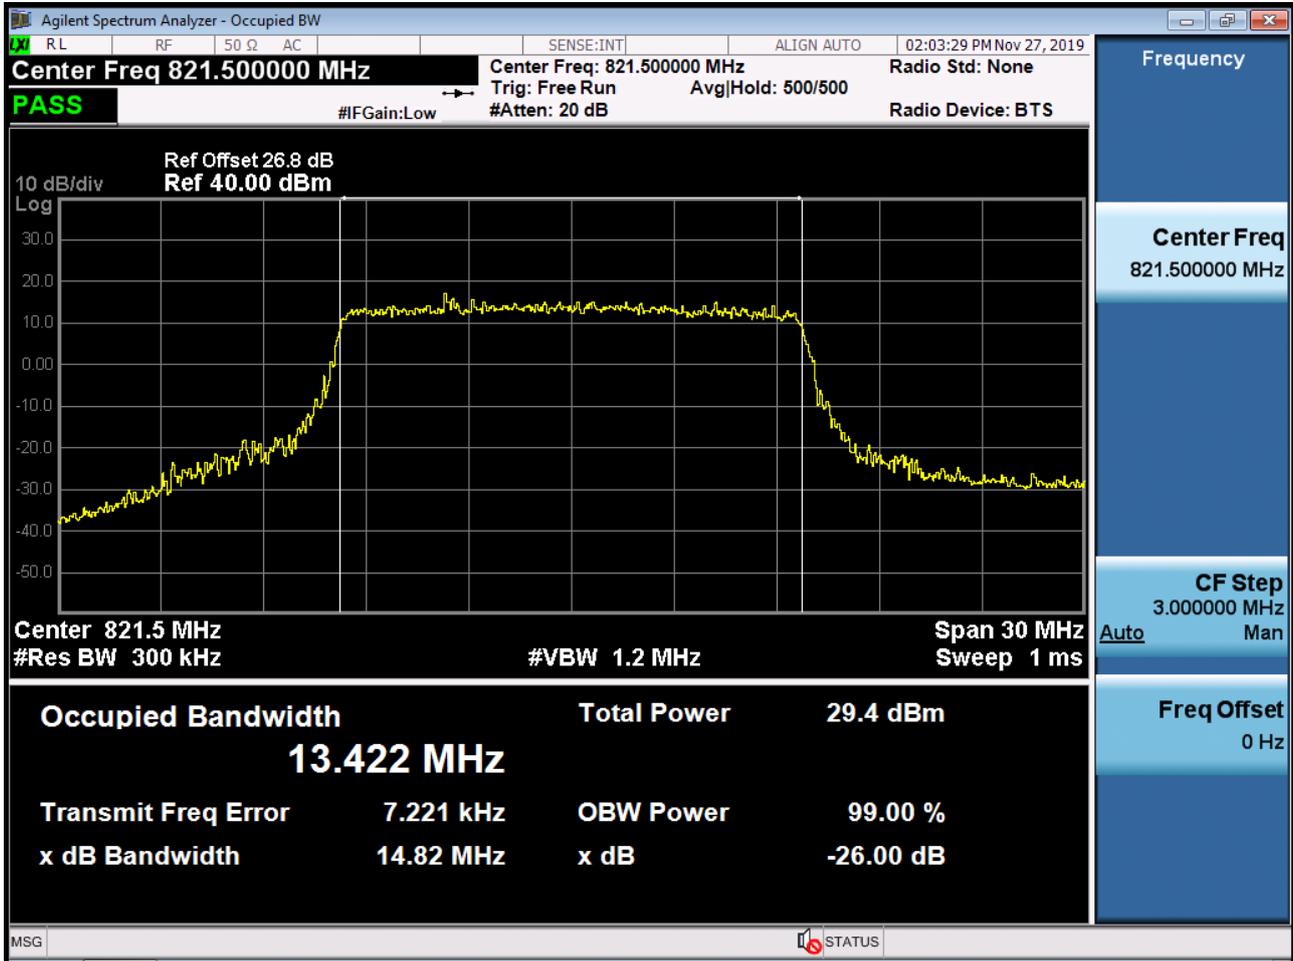


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26765 64QAM RB 75_0)

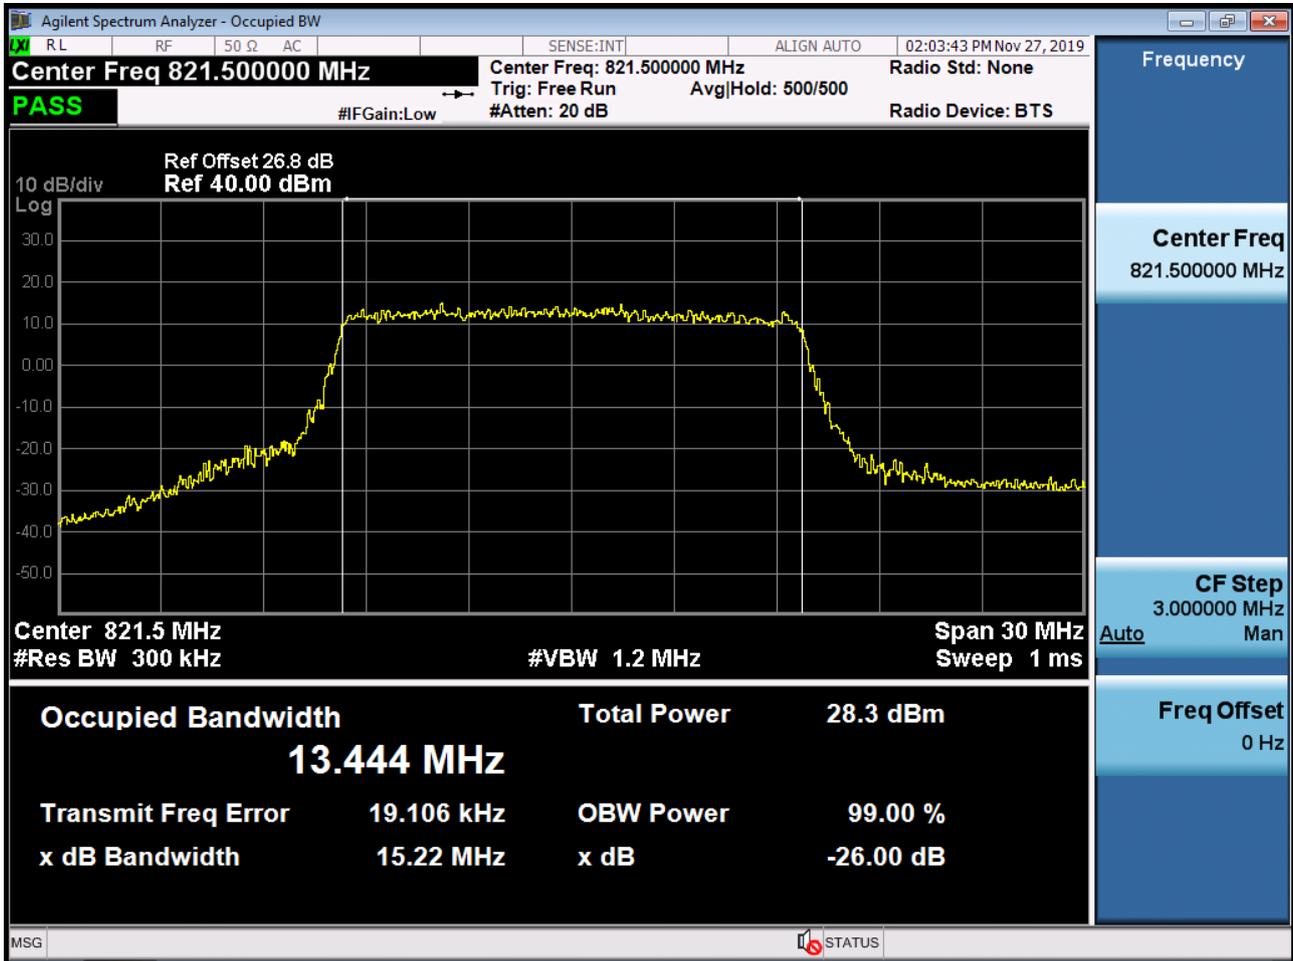


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26765 256QAM RB 75_0)

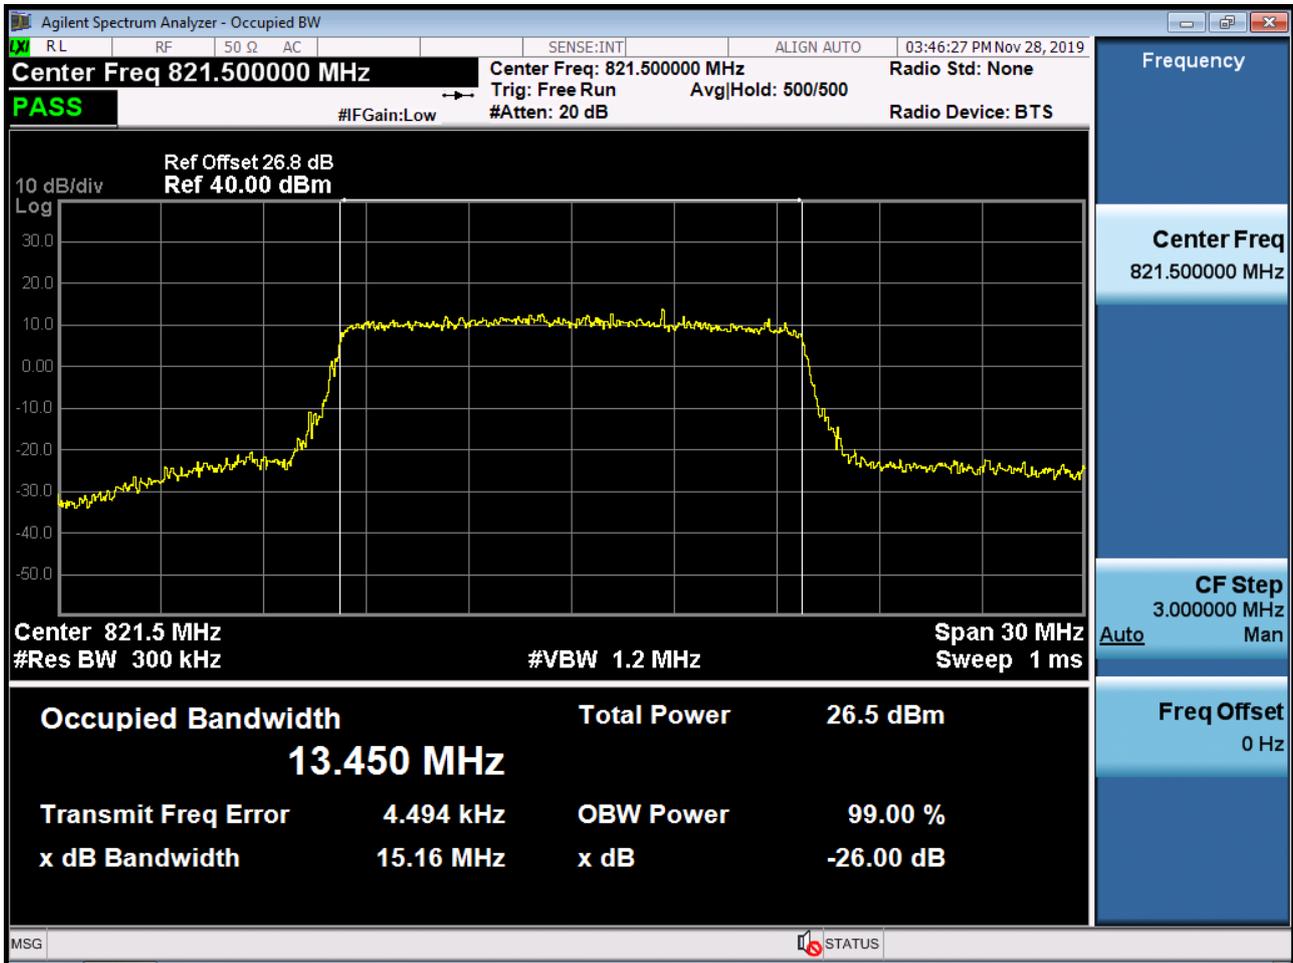


BAND 26. Lower Channel Edge Plot (1.4M BW Ch.26697 QPSK RB 1, Offset 0)

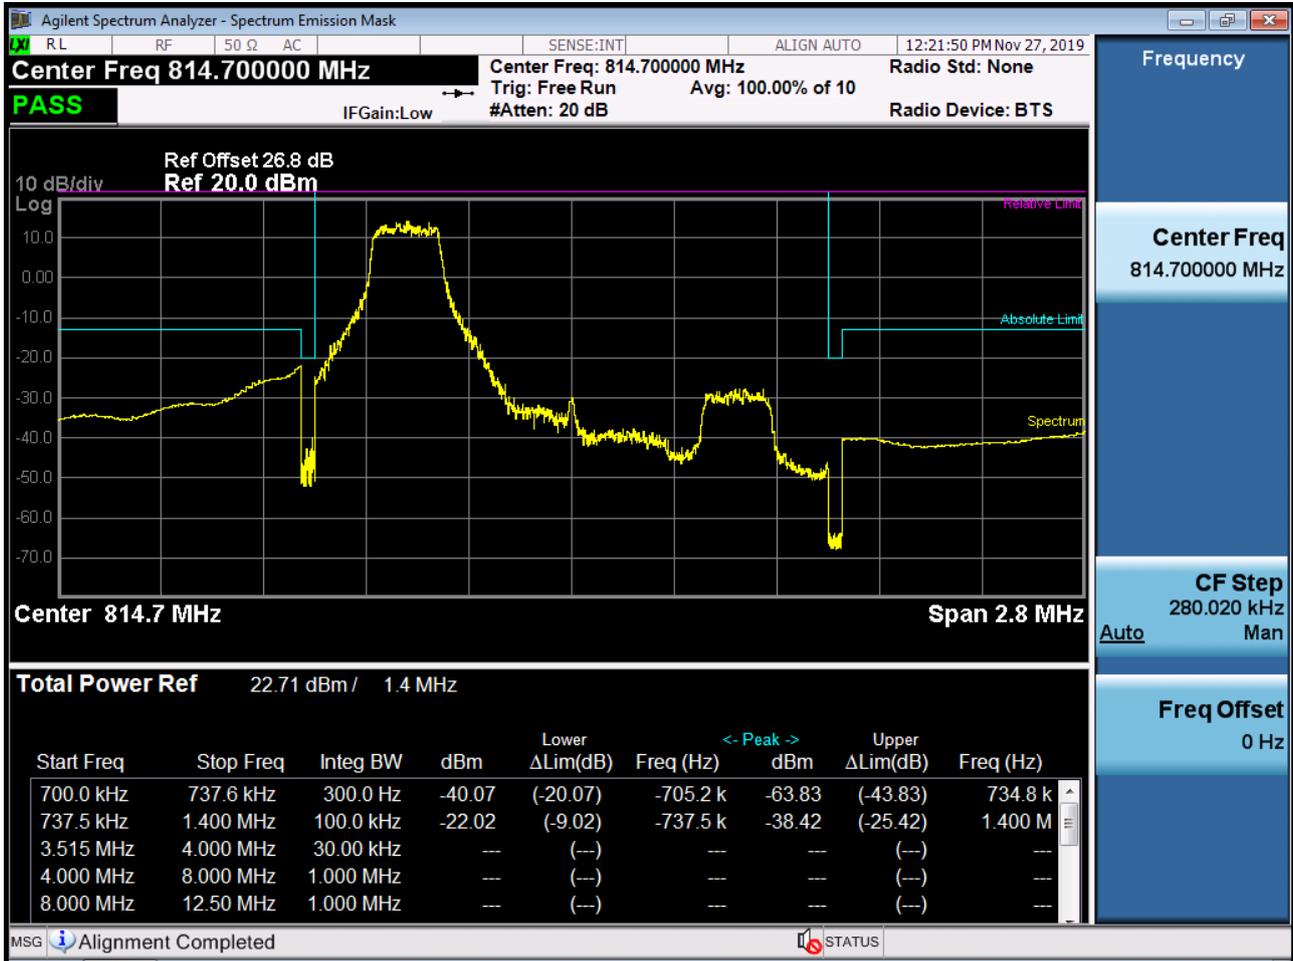


BAND 26. Lower Channel Edge Plot (1.4M BW Ch.26697 QPSK_RB6_Offset 0)

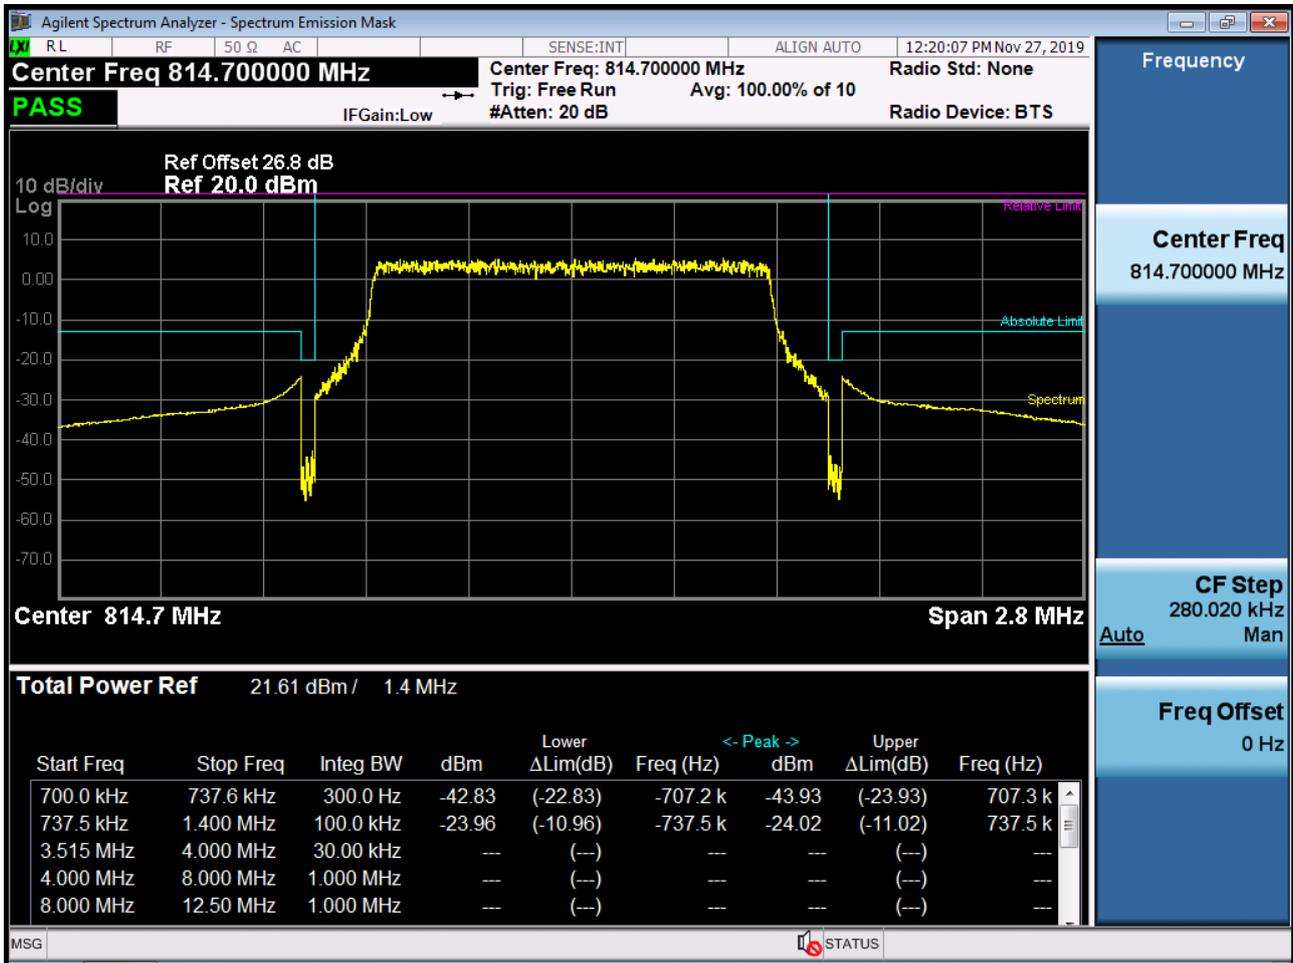


BAND 26. Lower Channel Edge Plot (3M BW Ch.26705 QPSK RB 1, Offset 0)

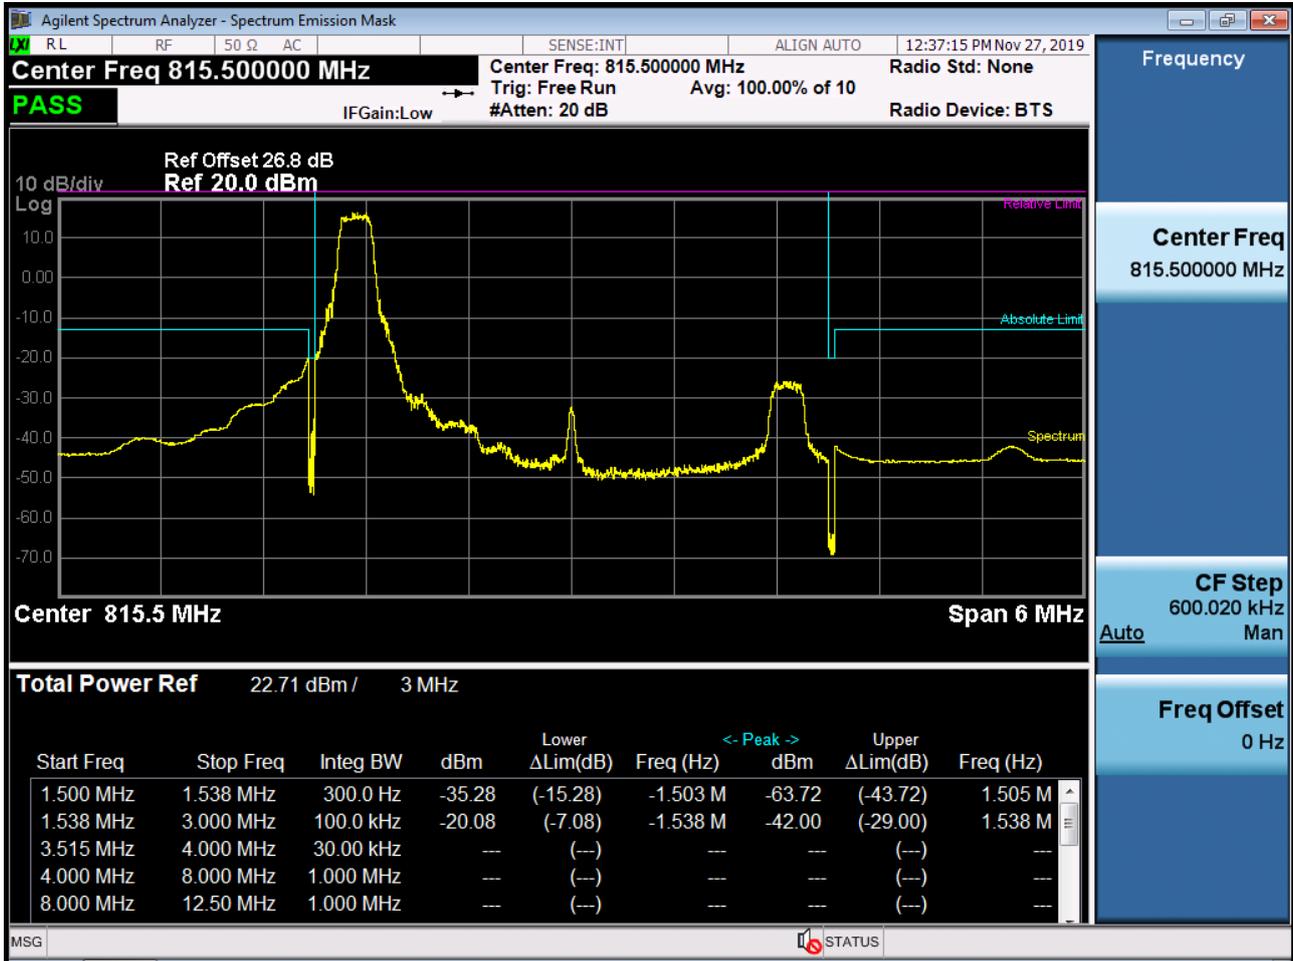


BAND 26. Lower Channel Edge Plot (3M BW Ch.26705 QPSK_RB15_Offset 0)

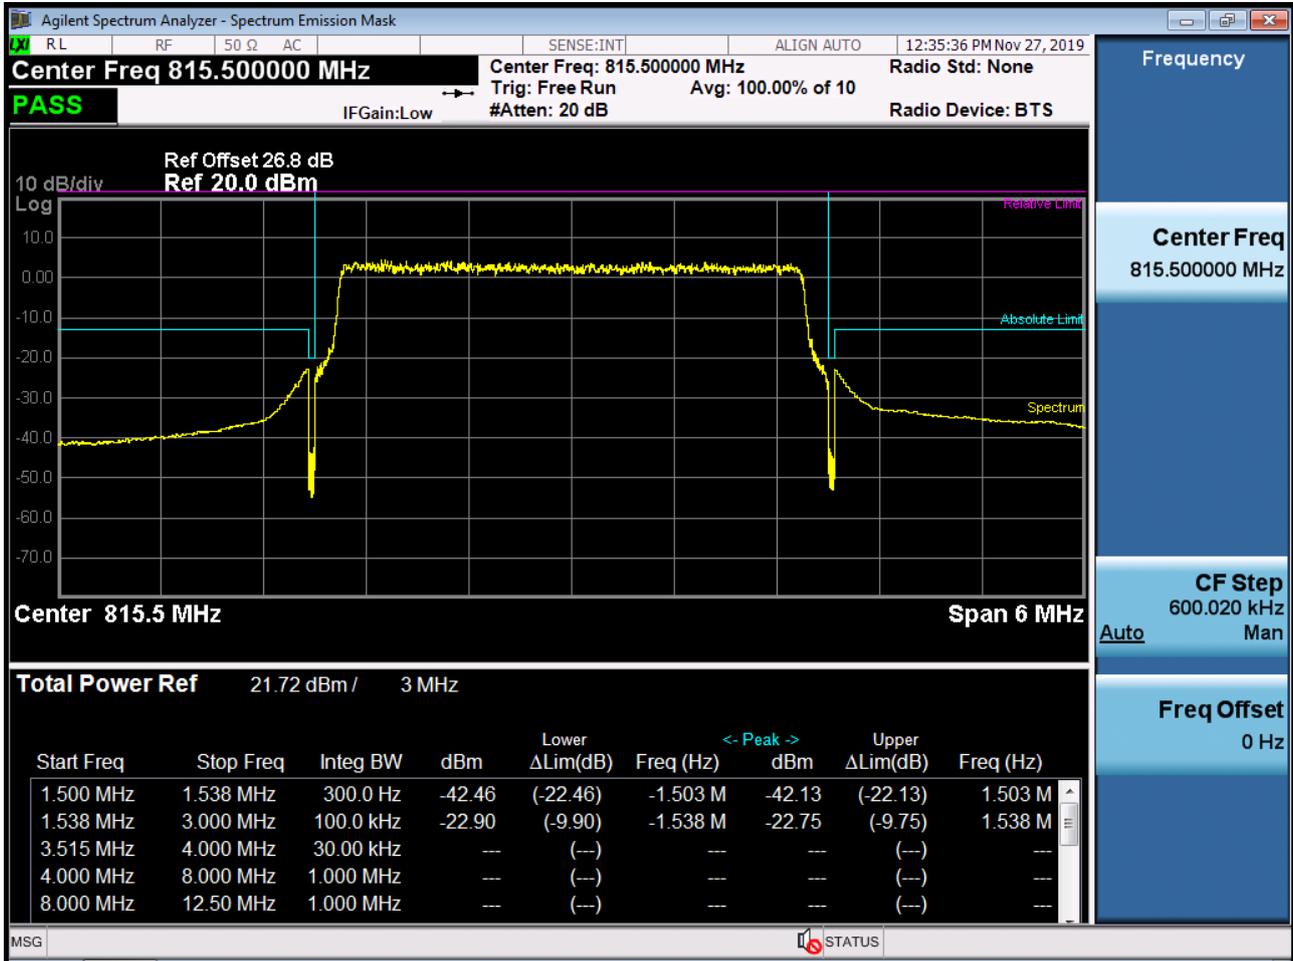


BAND 26. Lower Channel Edge Plot (5M BW Ch.26715 QPSK RB 1, Offset 0)

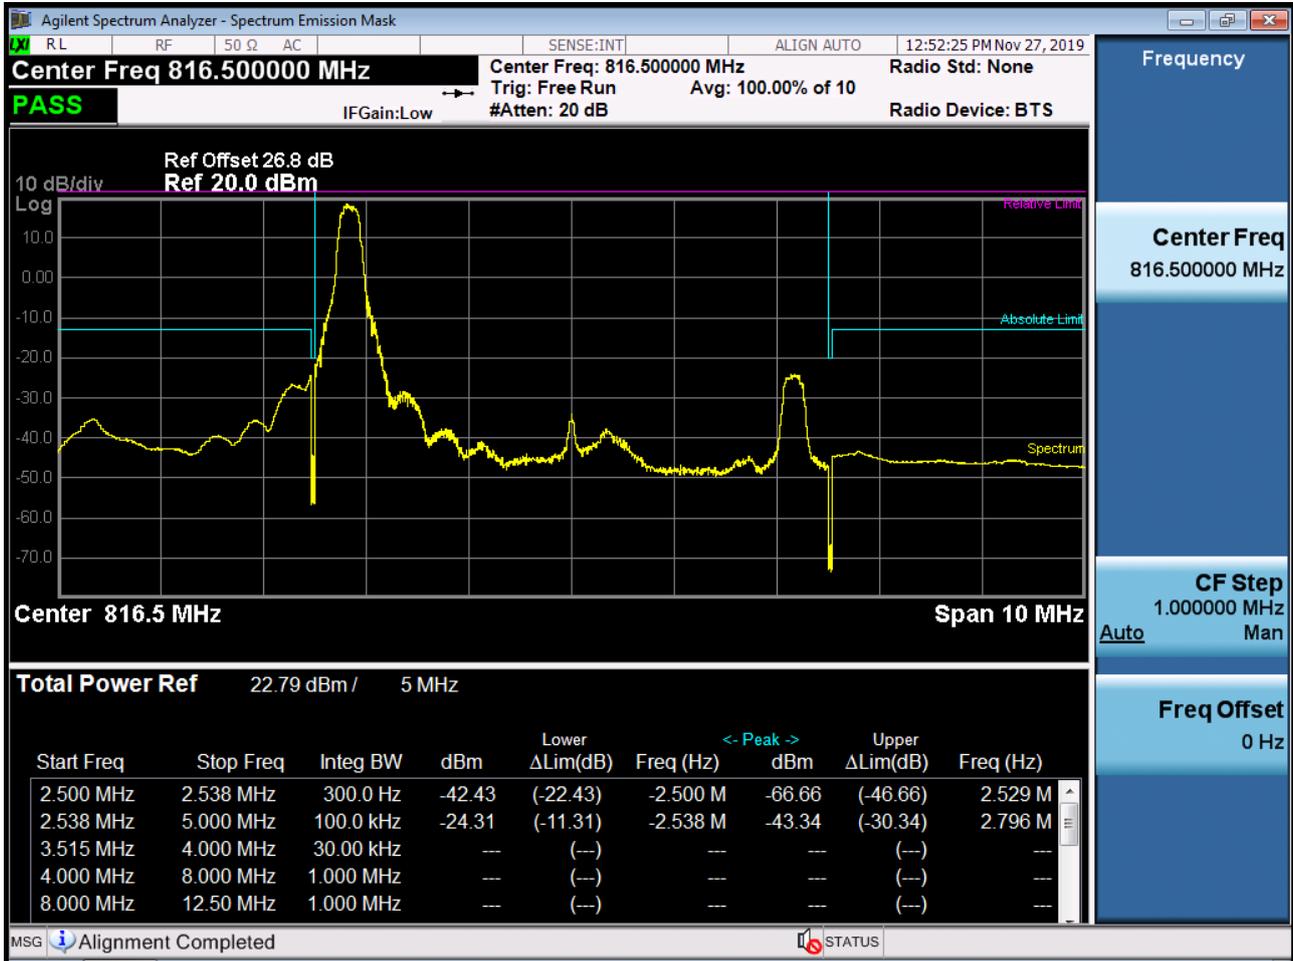


BAND 26. Lower Channel Edge Plot (5M BW Ch.26715 QPSK_RB25_Offset 0)

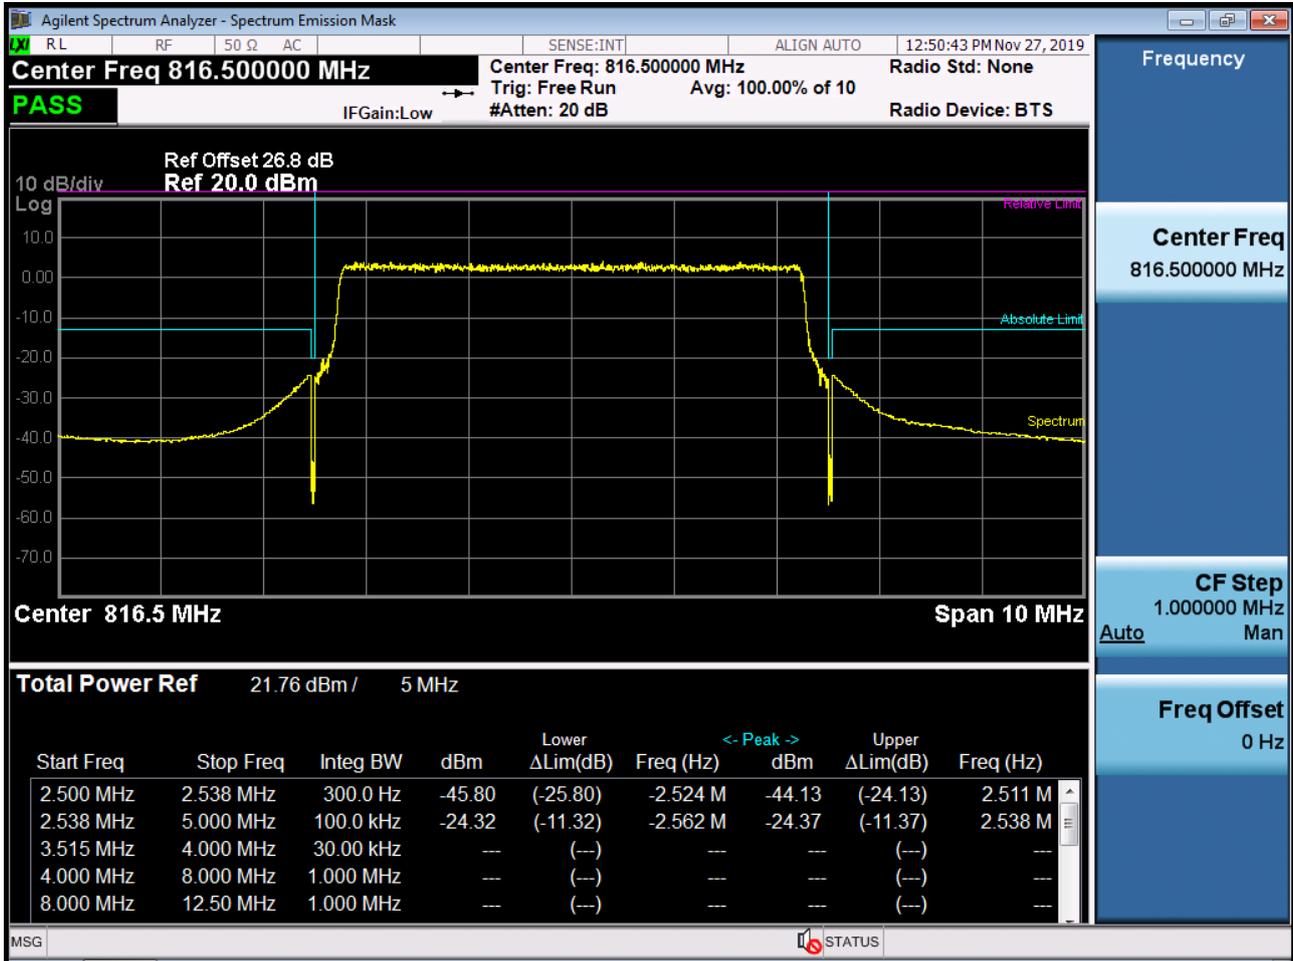


BAND 26. Low Channel Edge Plot (10M BW Ch.26740 QPSK RB 1, Offset 0)

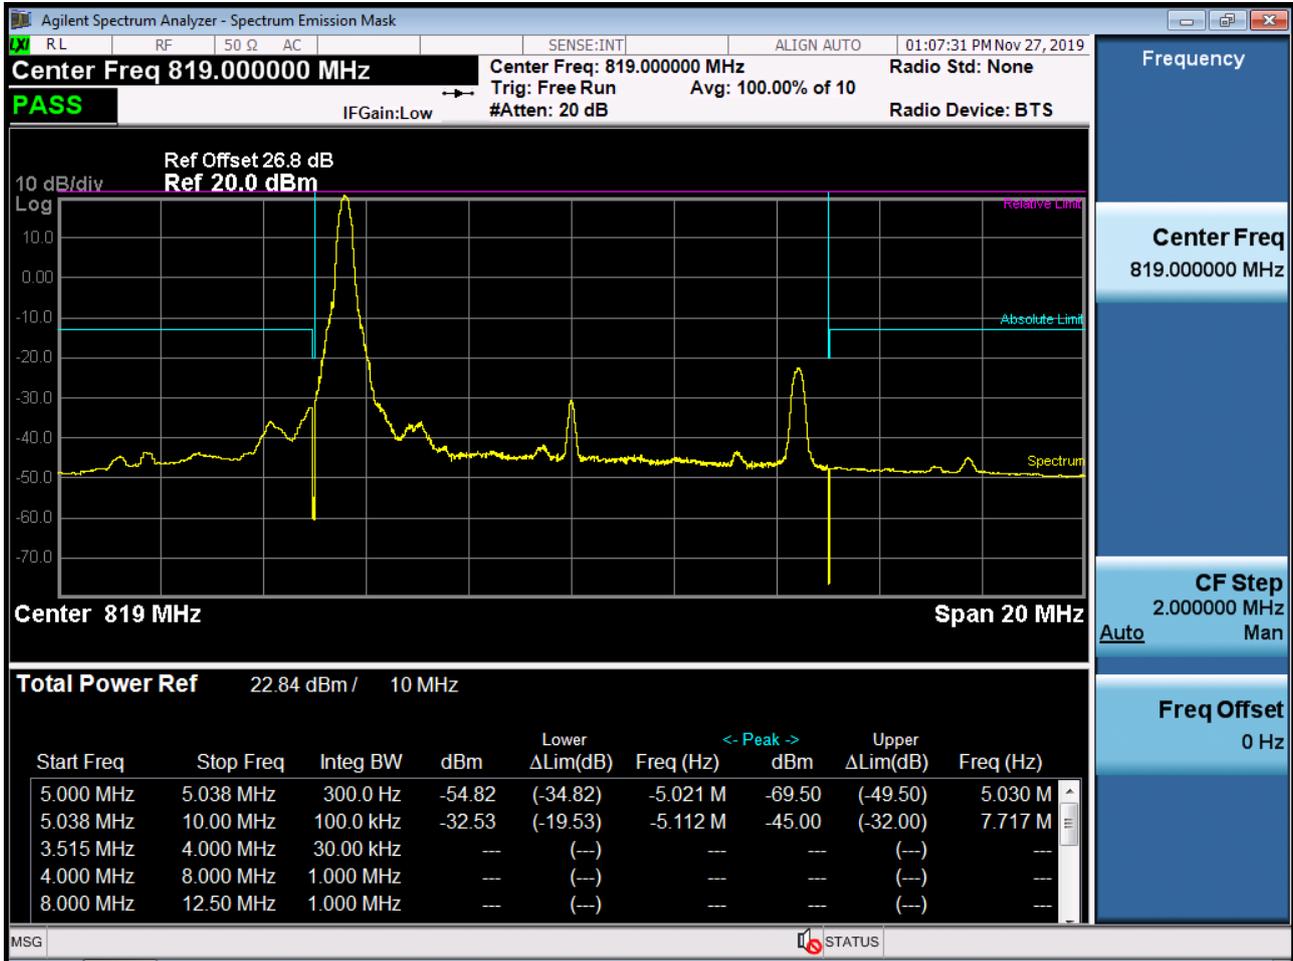


BAND 26. Low Channel Edge Plot (10M BW Ch.26740 QPSK_RB50_Offset 0)

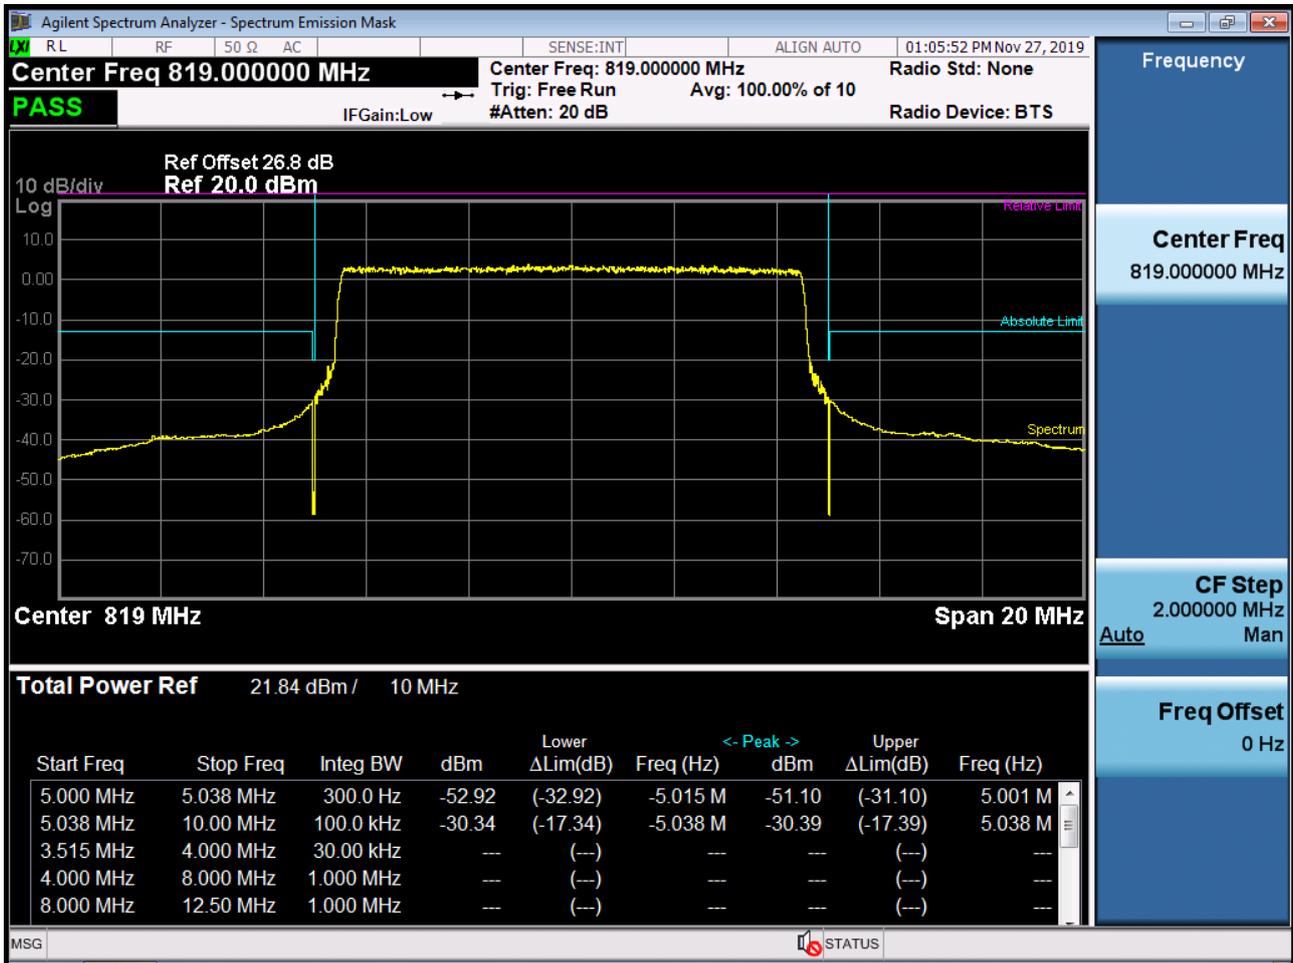


BAND 26. Low Channel Edge Plot (15M BW Ch.26765 QPSK RB 1, Offset 0)

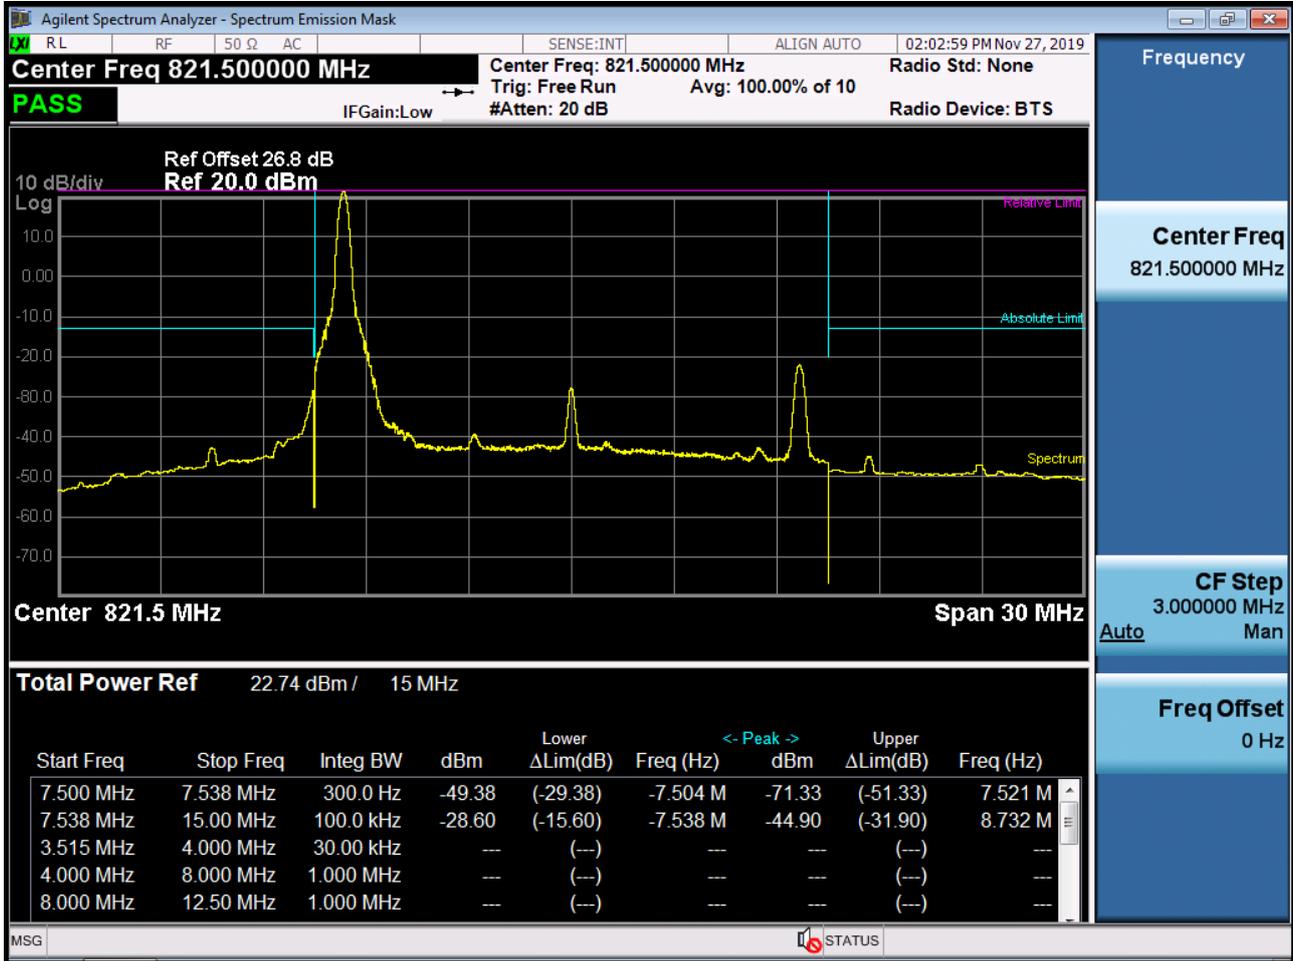

BAND 26. Low Channel Edge Plot (15M BW Ch.26765 QPSK RB 1, Offset74)

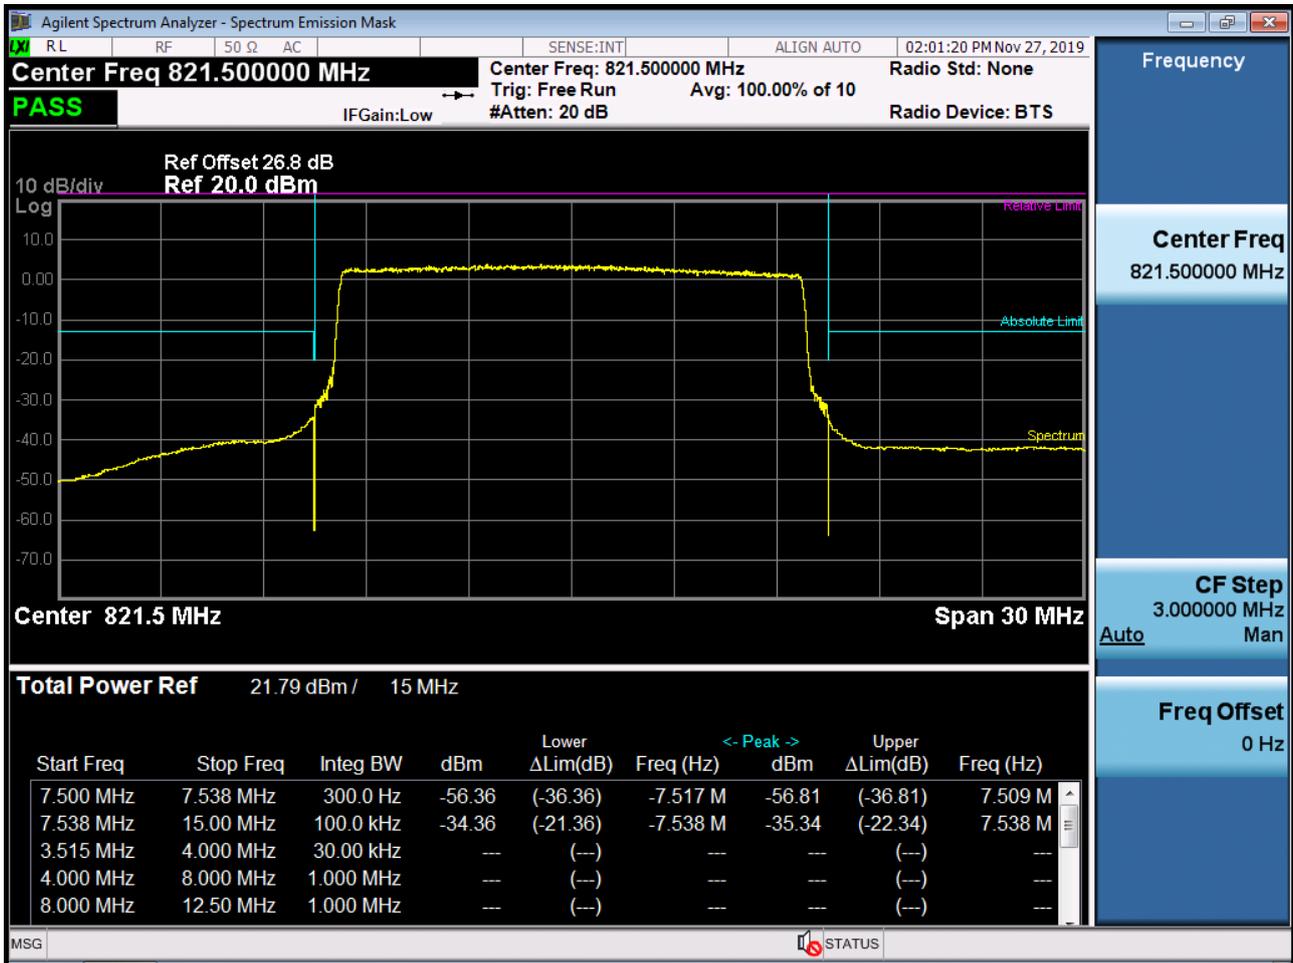


BAND 26. Mid Channel Edge Plot (15M BW Ch.26765 QPSK_RB75_Offset 0)

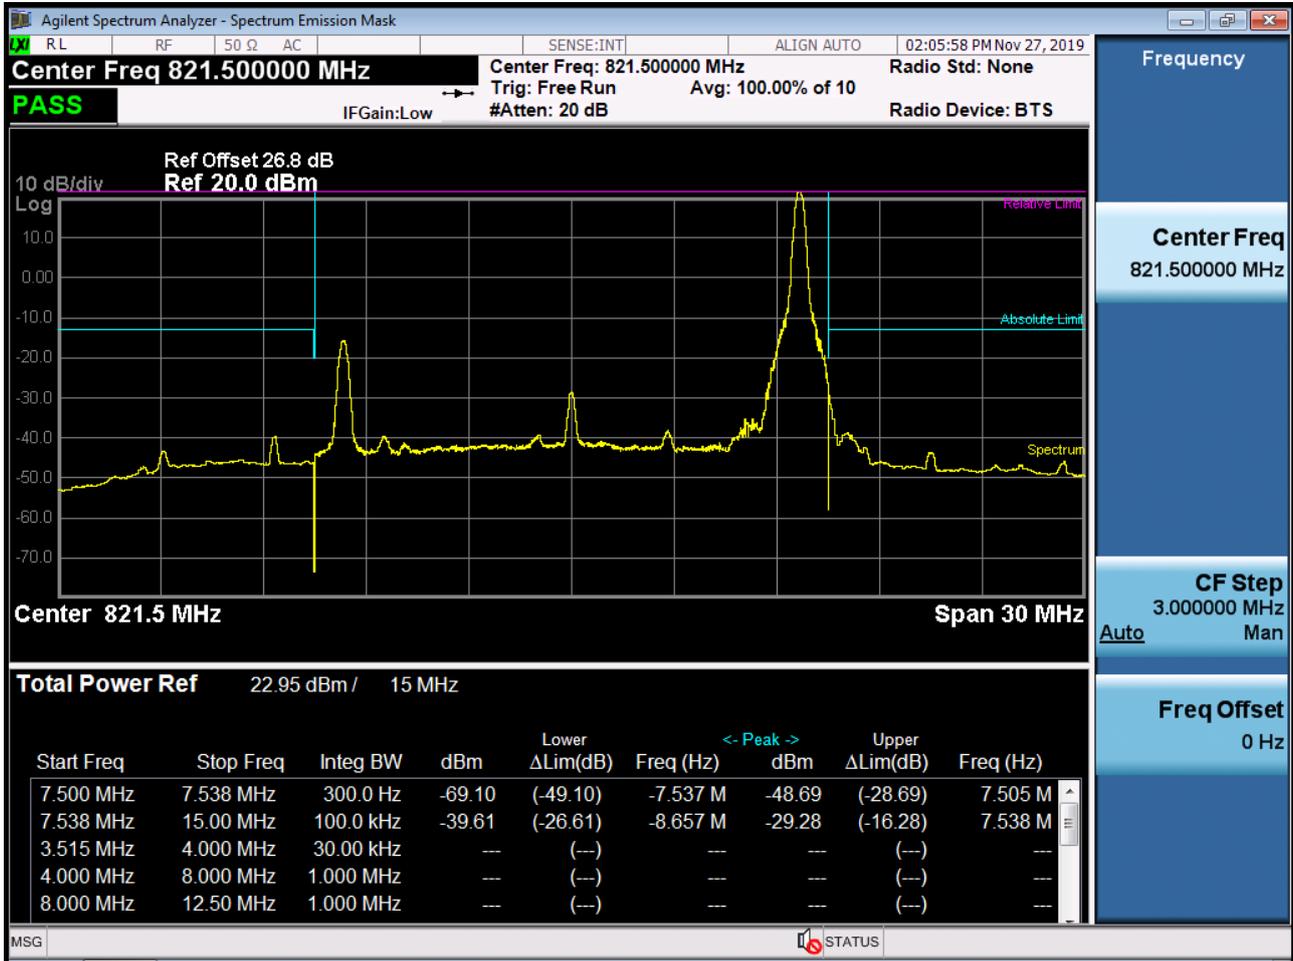


BAND 26. Mid Band Edge Plot (15M BW Ch.26765 QPSK RB 1, Offset74)-1




BAND 26. Mid Band Edge Plot (15M BW Ch.26765 QPSK_RB75_Offset 0)-2

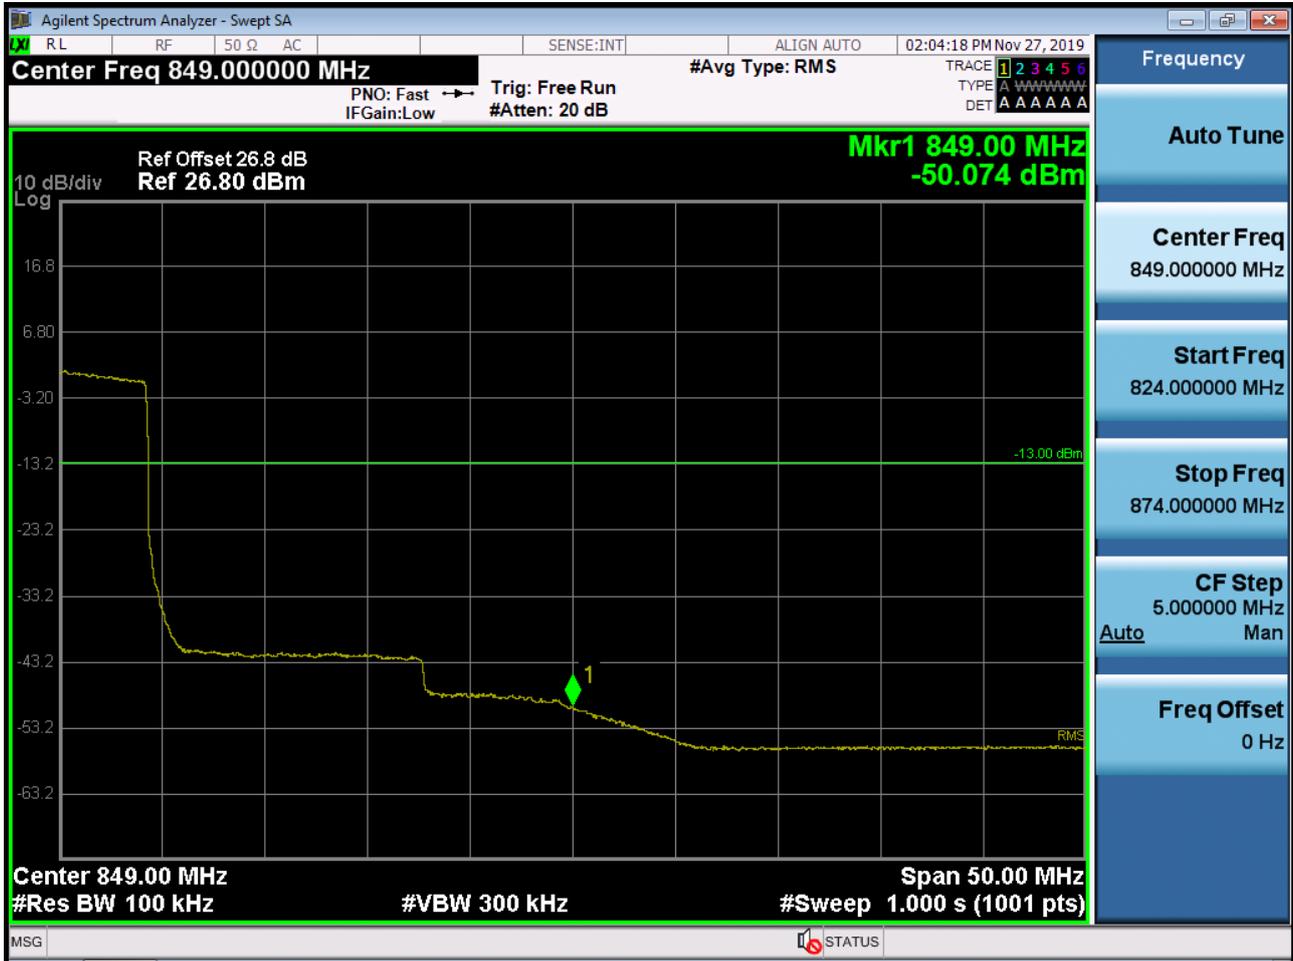


BAND 26. Upper Channel Edge Plot (1.4M BW Ch.26783 QPSK_RB1_Offset 5)

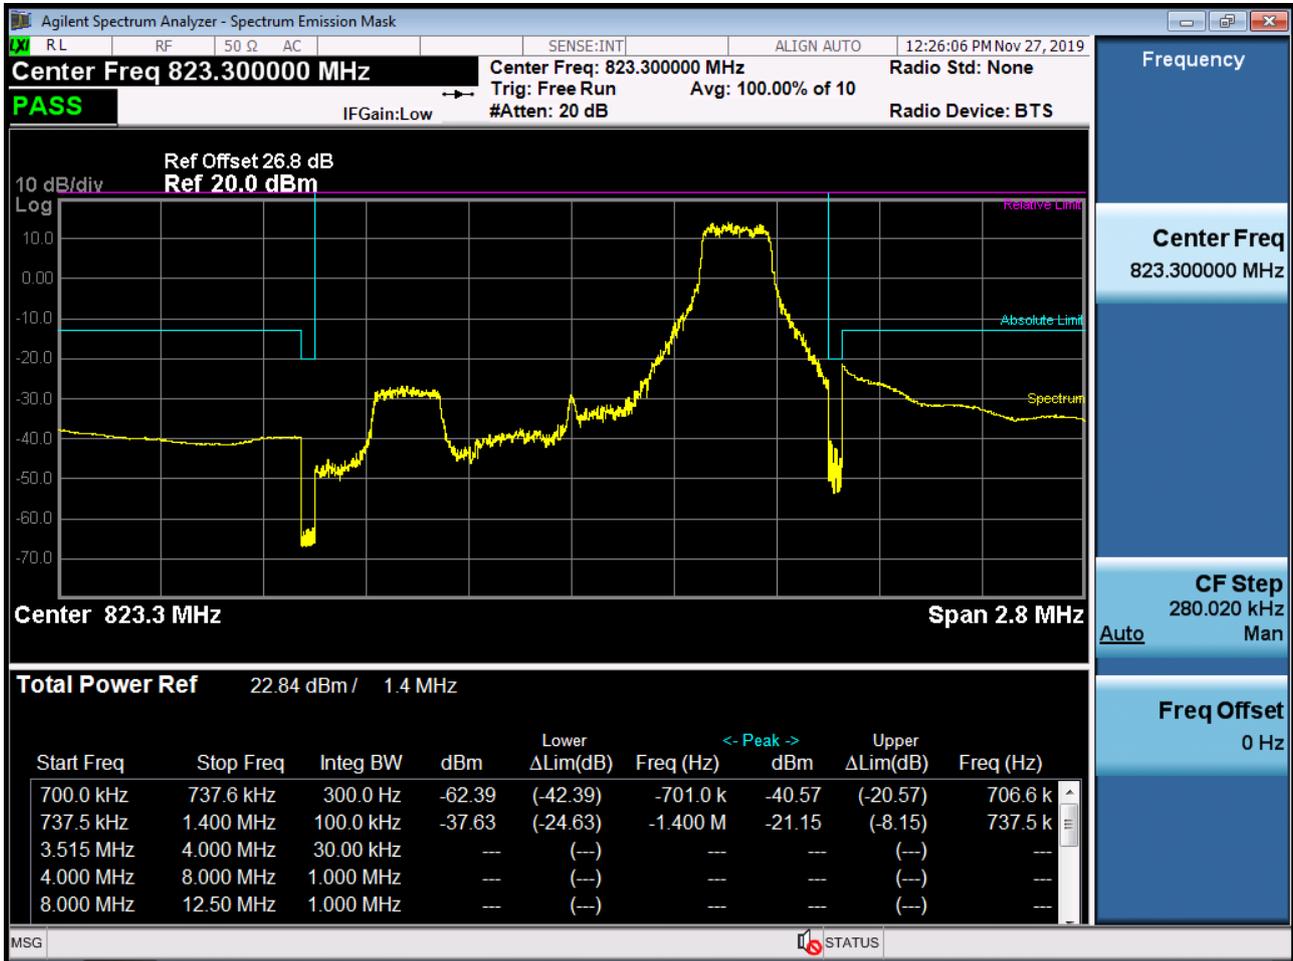


BAND 26. Upper Channel Edge Plot (1.4M BW Ch.26783 QPSK_RB6_Offset 0)

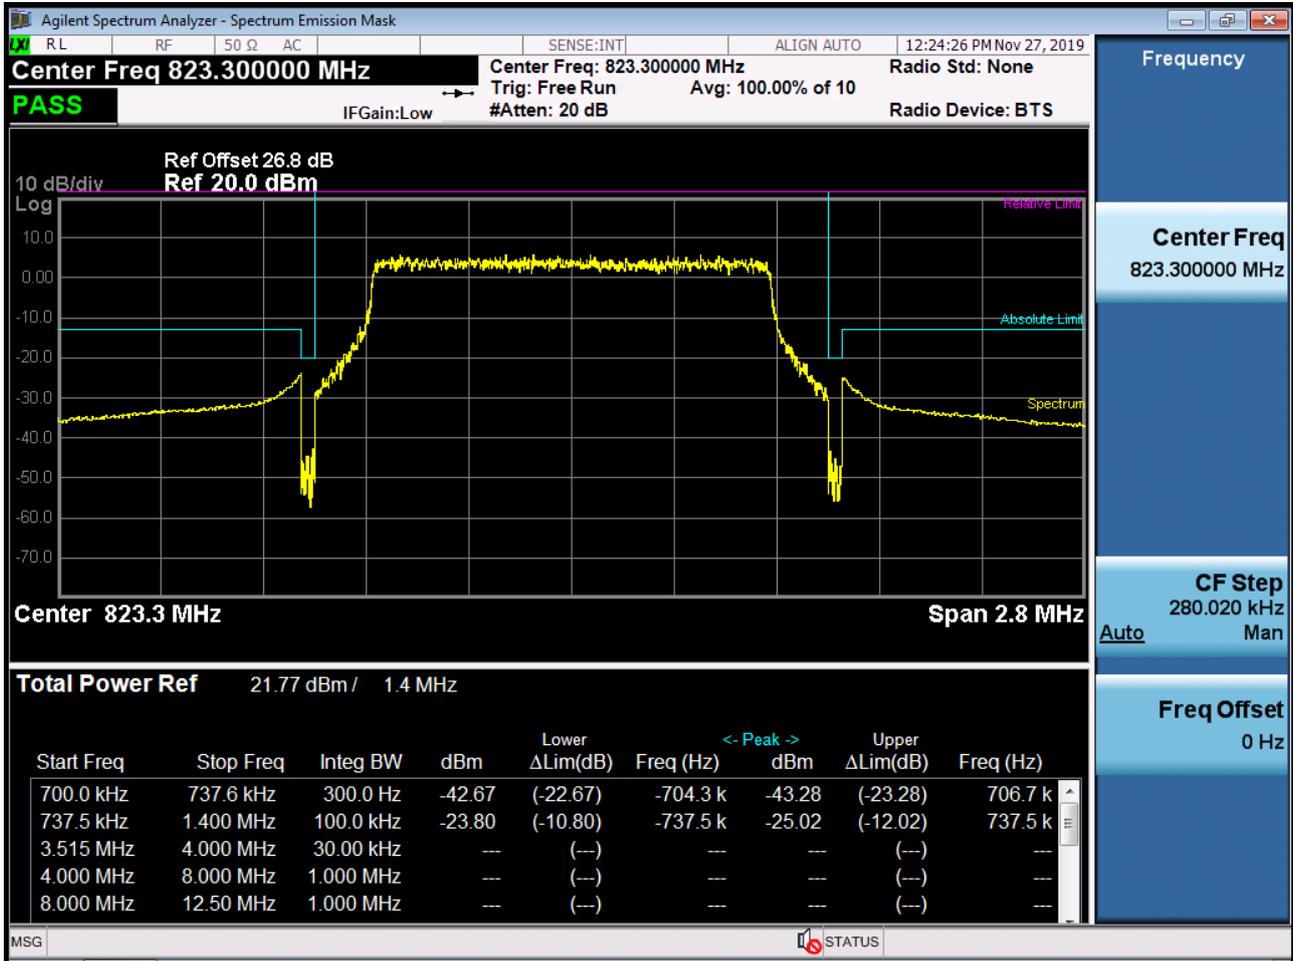


BAND 26. Upper Channel Edge Plot (3M BW Ch.26775 QPSK_RB1_Offset 14)

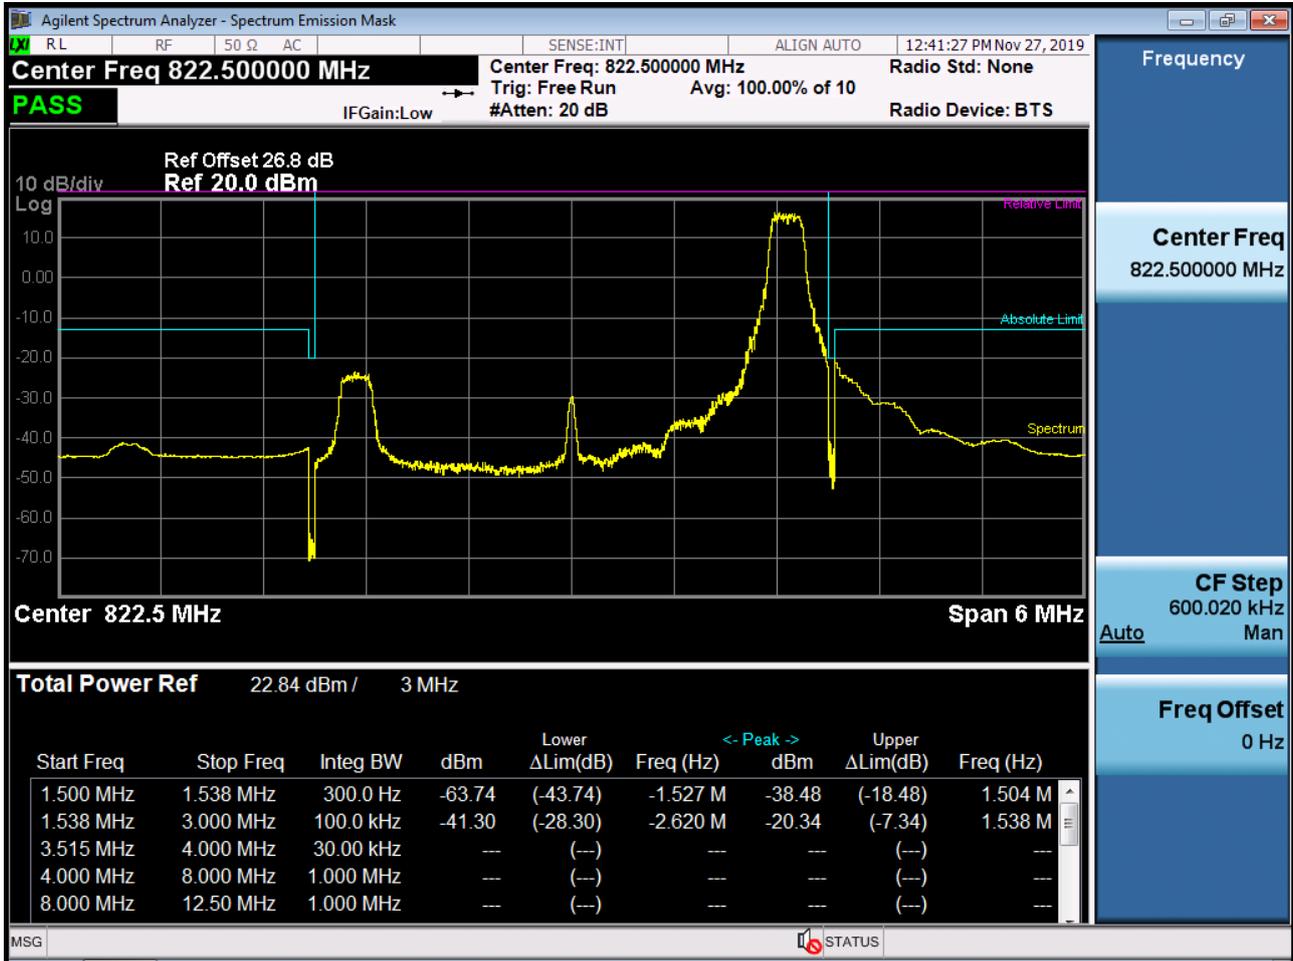


BAND 26. Upper Channel Edge Plot (3M BW Ch.26775 QPSK_RB15_Offset 0)

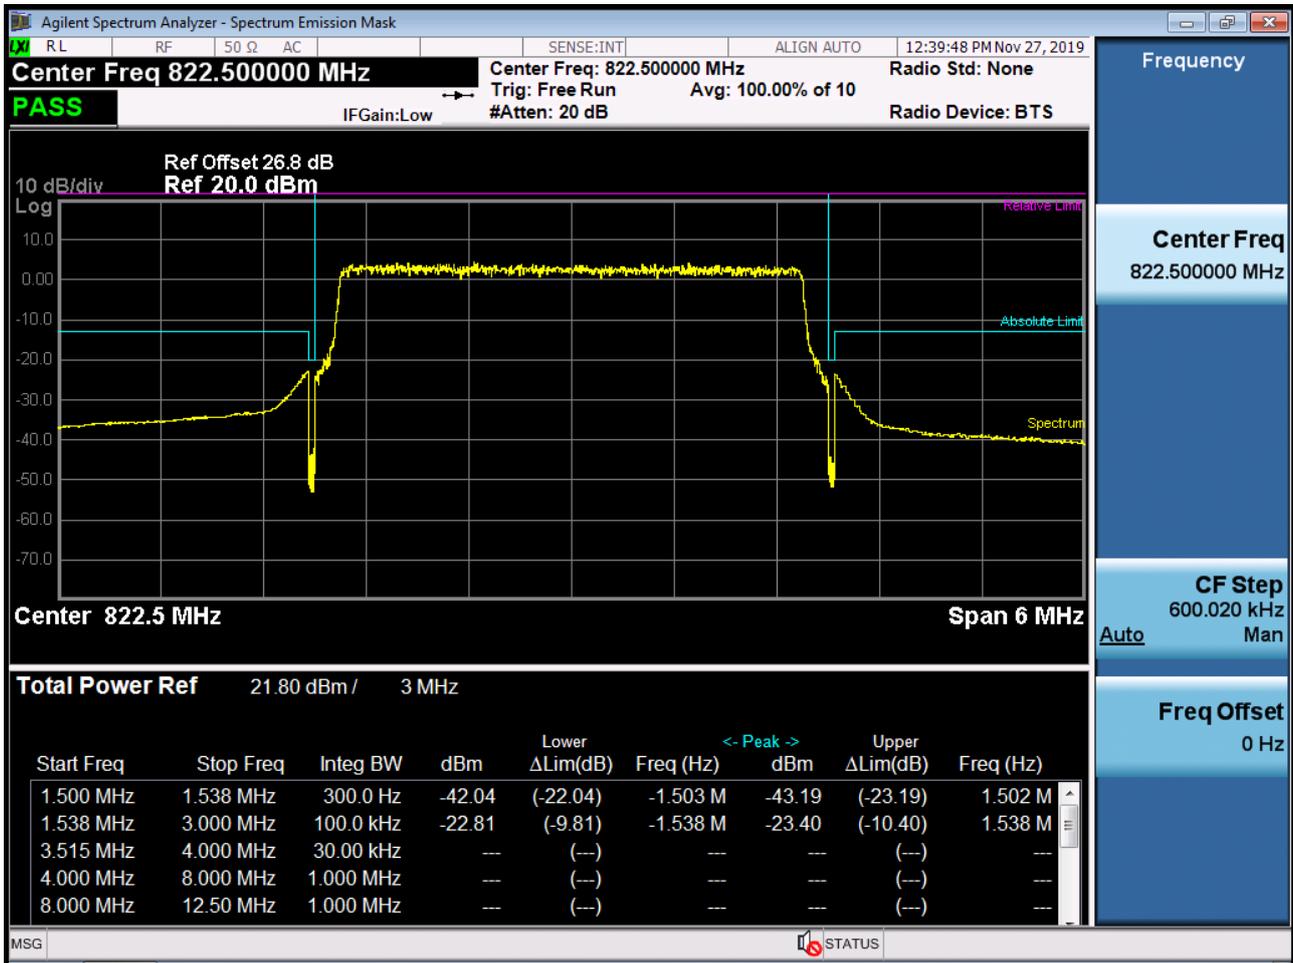


BAND 26. Upper Channel Edge Plot (5M BW Ch.26765 QPSK_RB1_Offset 24)

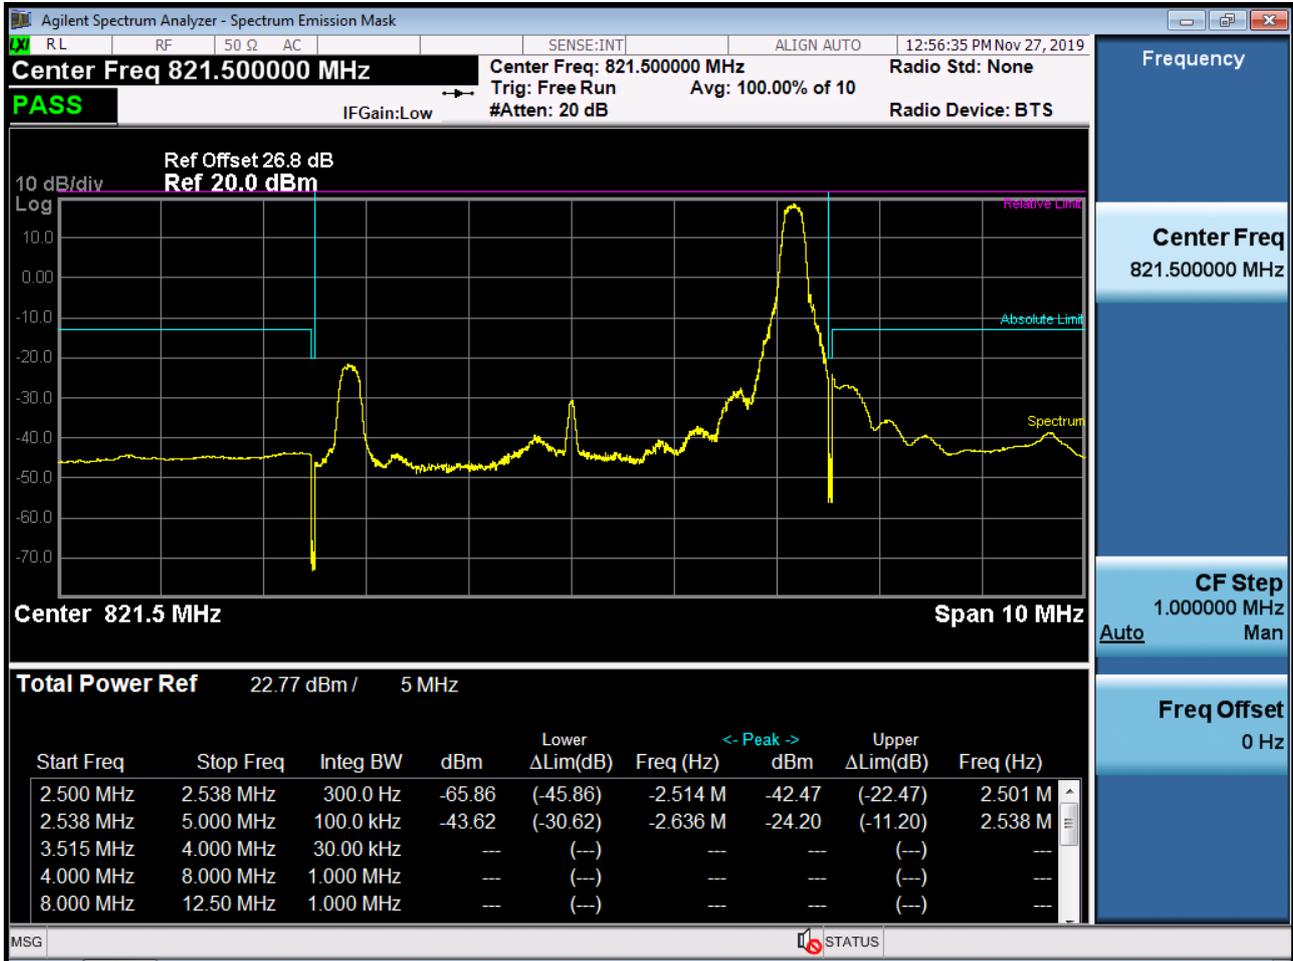


BAND 26. Upper Channel Edge Plot (5M BW Ch.26765 QPSK_RB25_Offset 0)

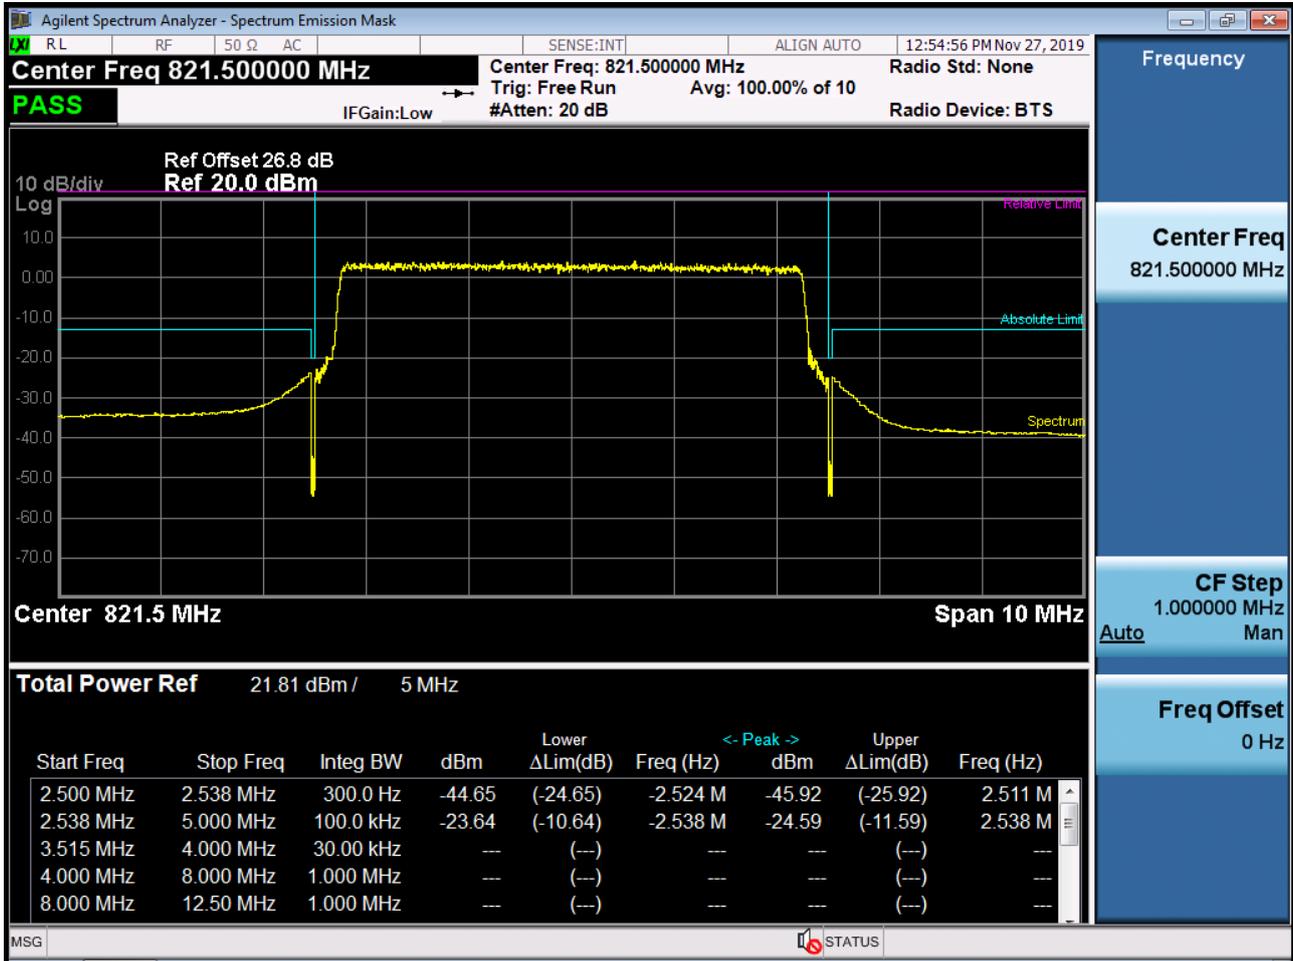


BAND 26. Mid Channel Edge Plot (10M BW Ch. 26740 QPSK_RB1_Offset 49)

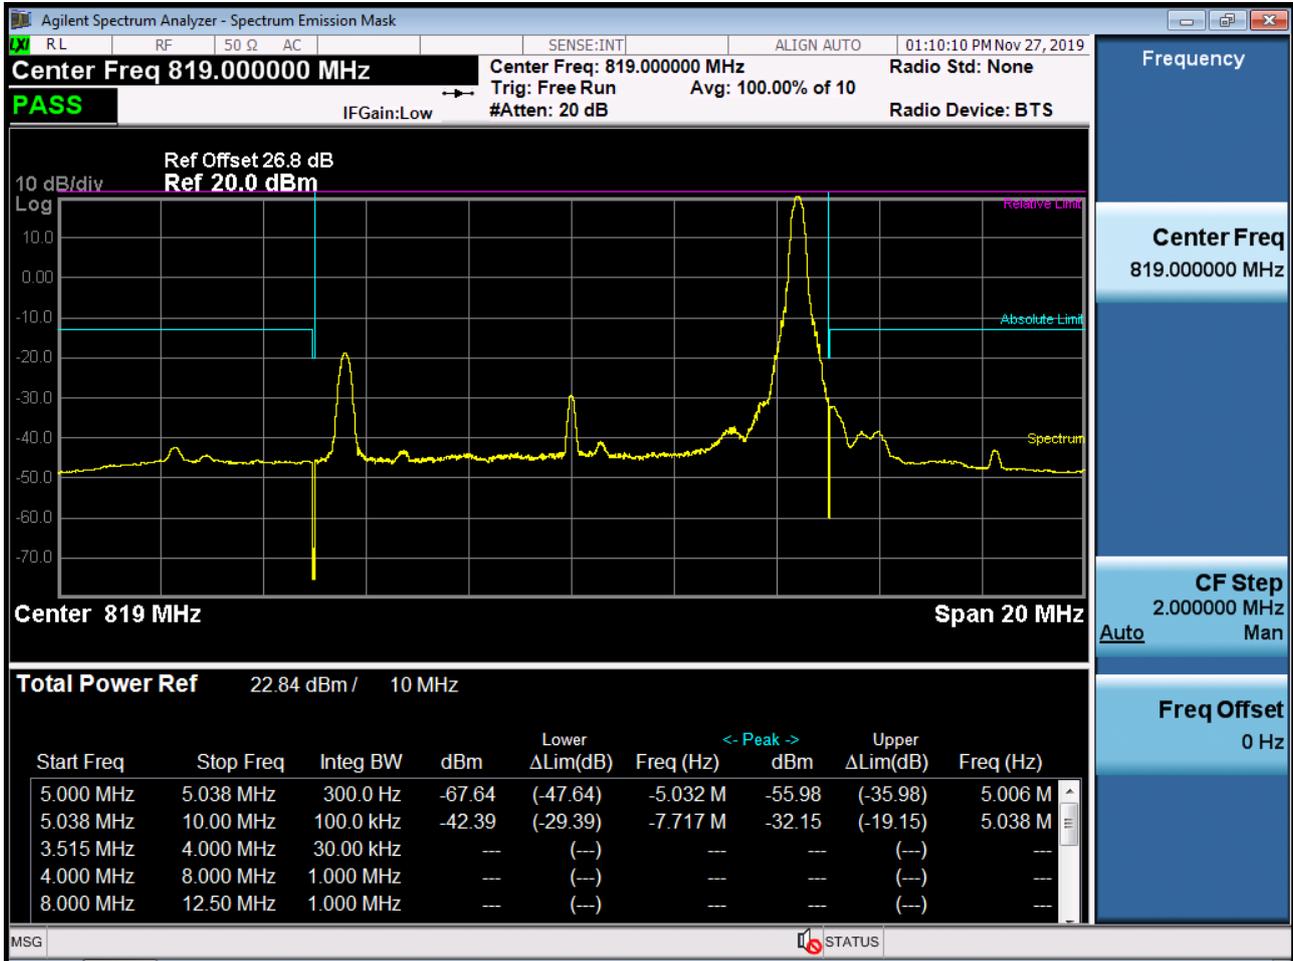


BAND 26. Conducted Spurious (26697 ch_1.4MHz_QPSK_RB 1_0)

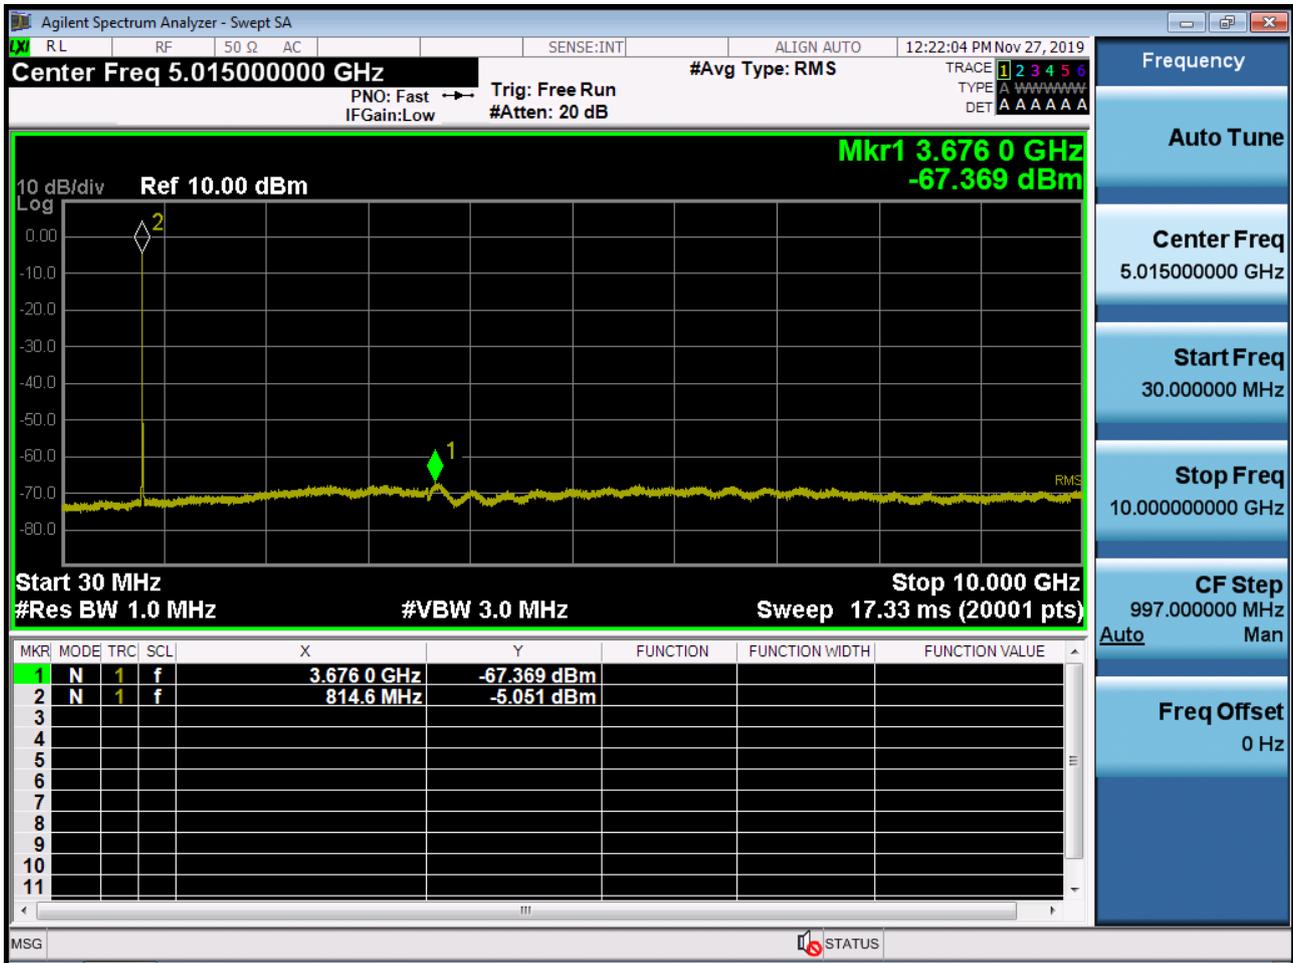


BAND 26. Conducted Spurious (26783 ch_1.4MHz_QPSK_RB 1_0)

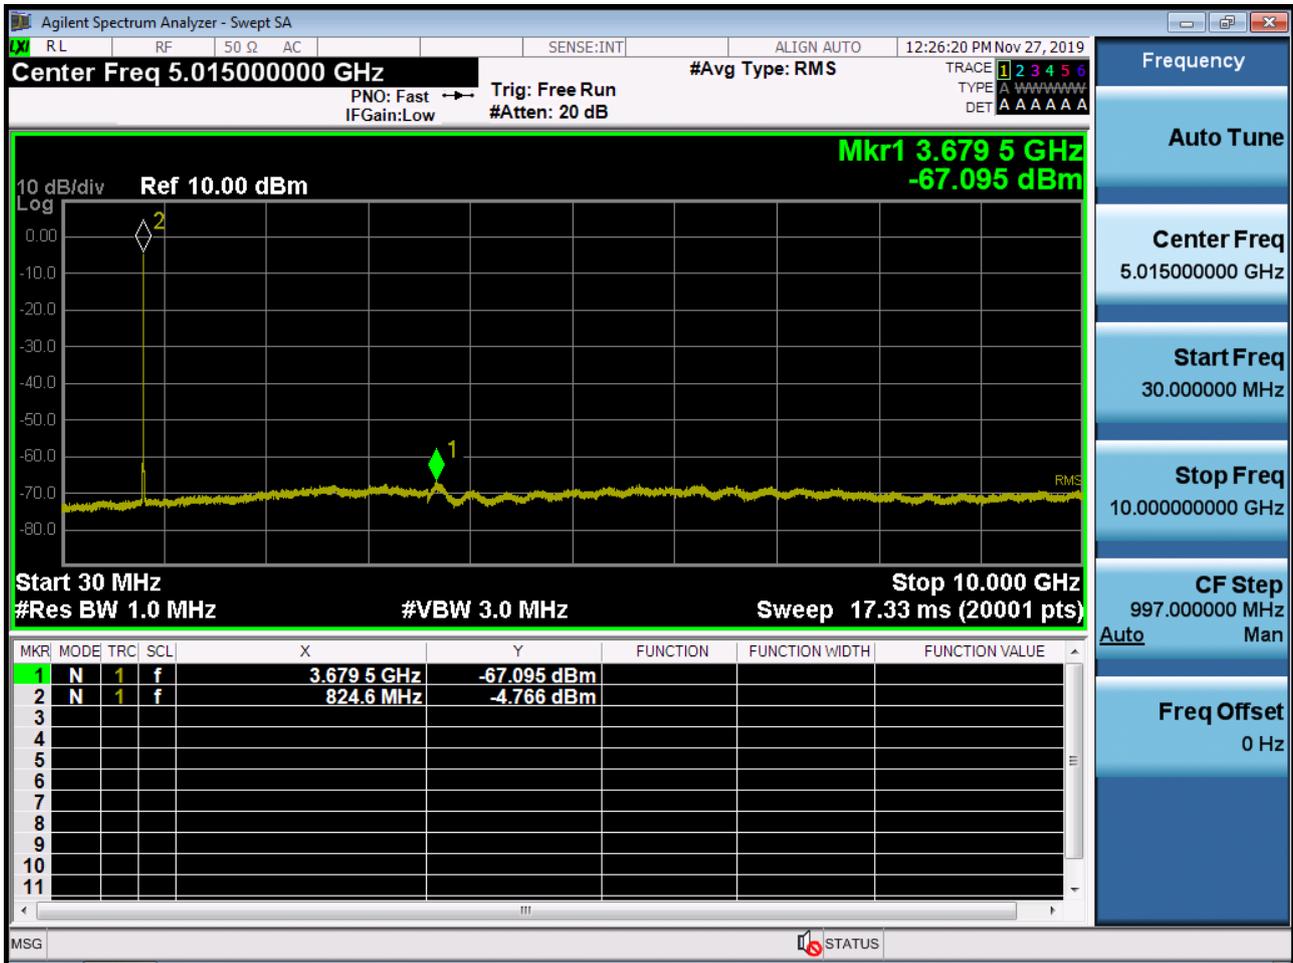


BAND 26. Conducted Spurious (26705 ch_3MHz_QPSK_RB 1_0)

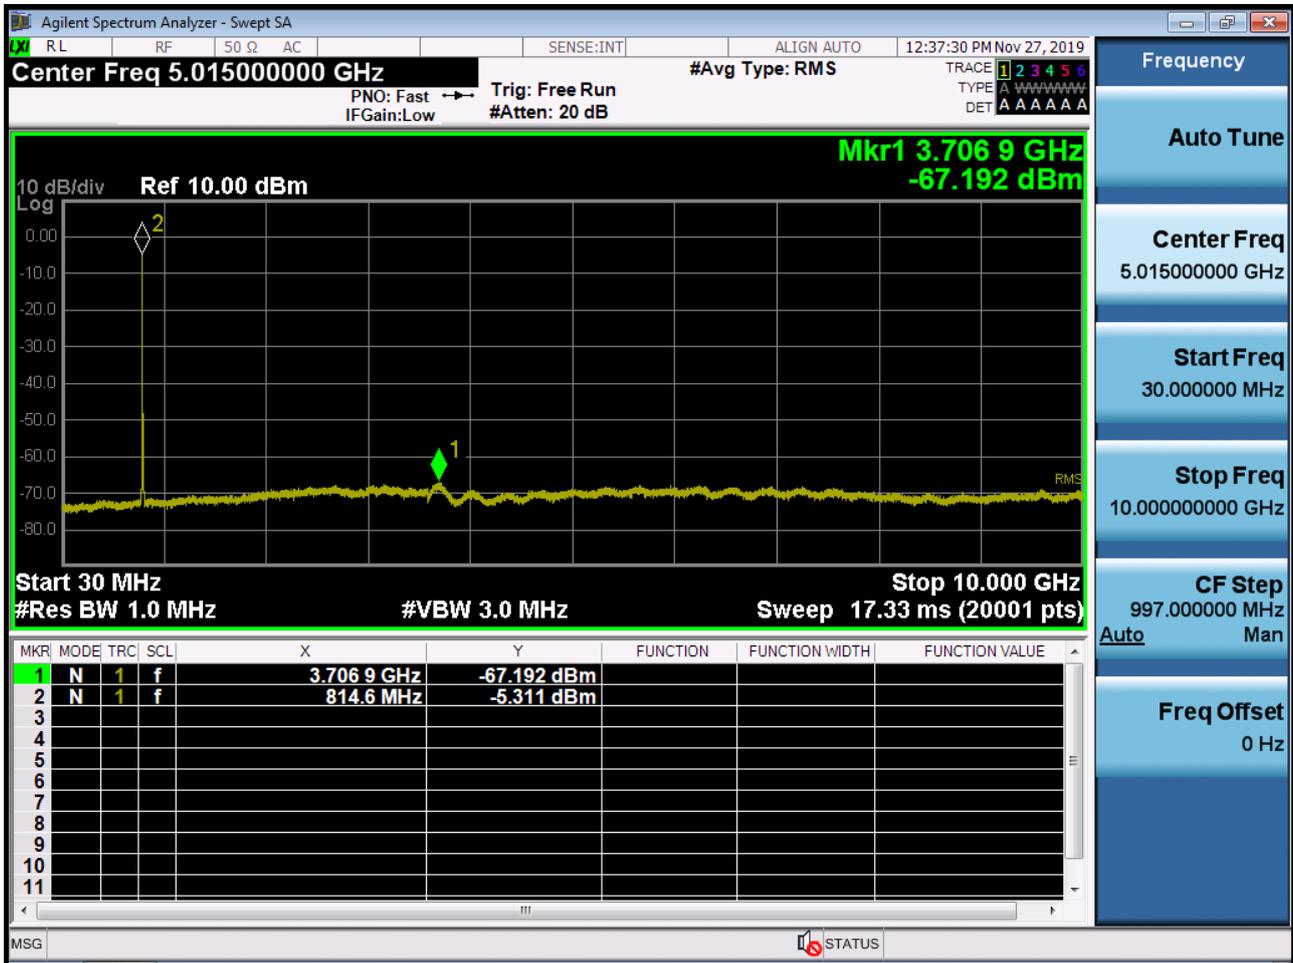


BAND 26. Conducted Spurious (26775 ch_3MHz_QPSK_RB 1_0)

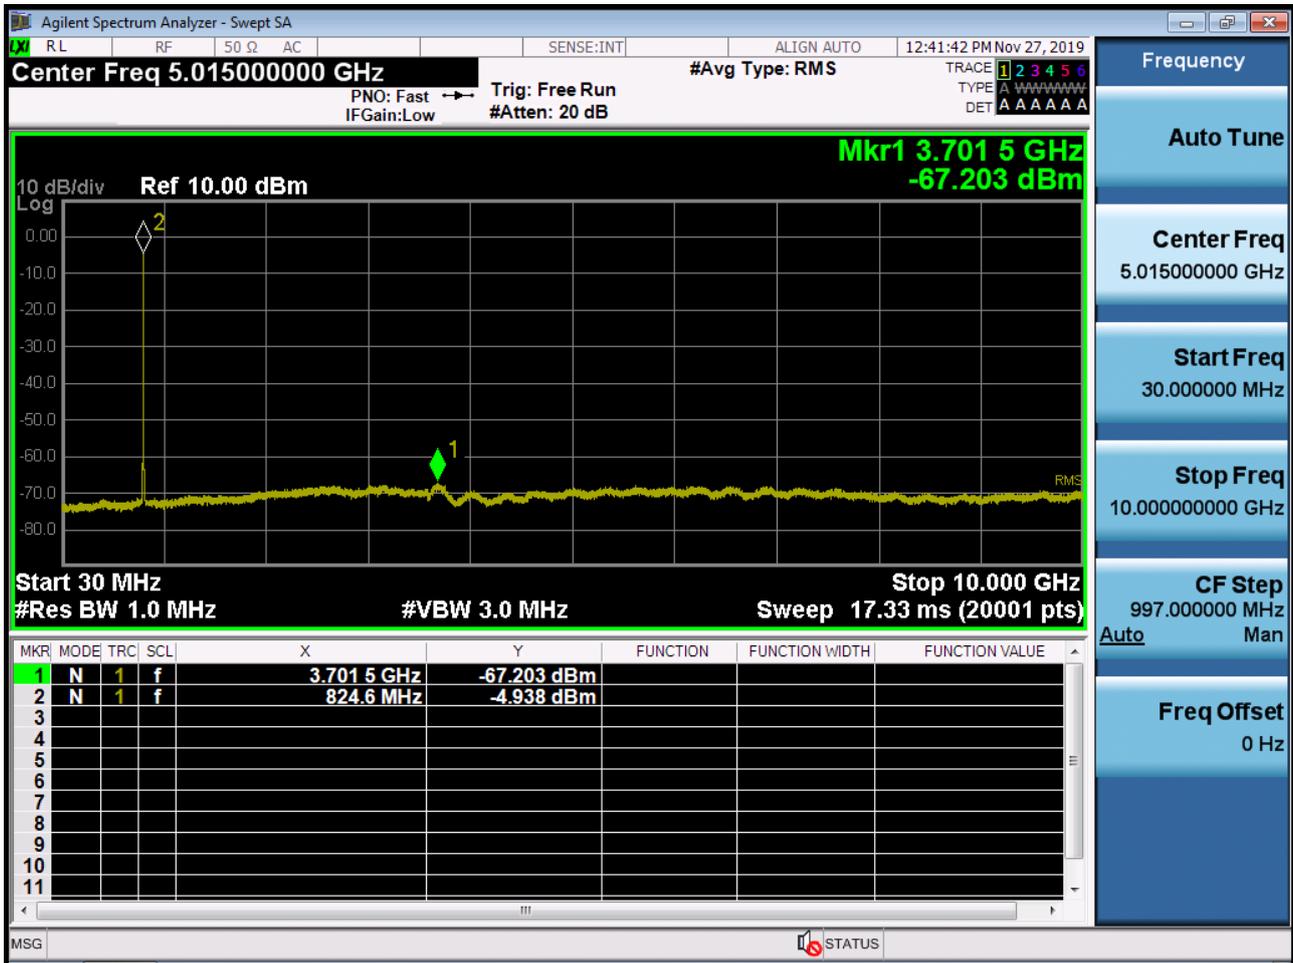


BAND 26. Conducted Spurious (26715 ch_5MHz_QPSK_RB 1_0)

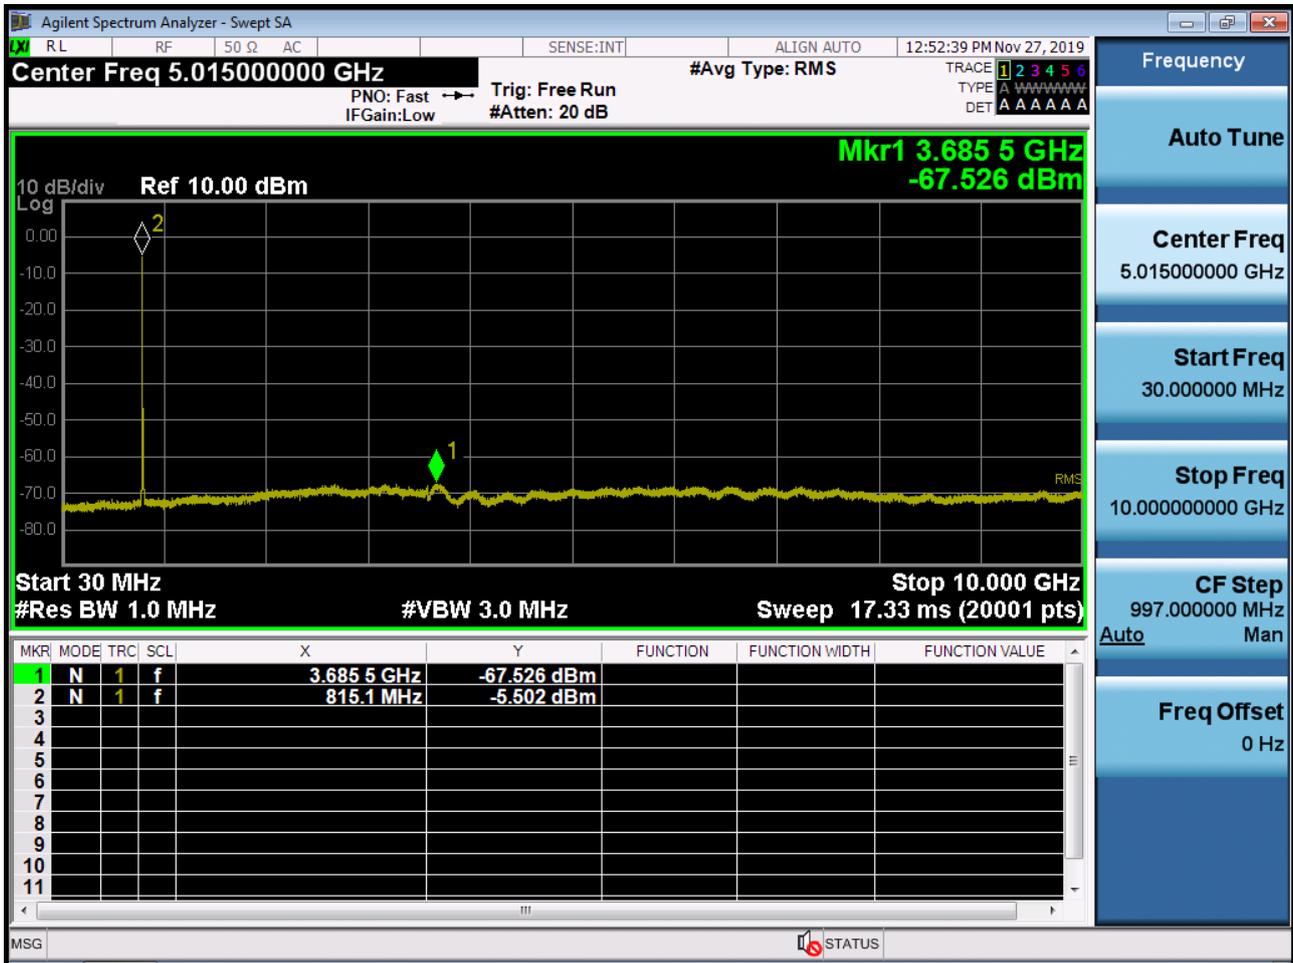


BAND 26. Conducted Spurious (26765 ch_5MHz_QPSK_RB 1_0)

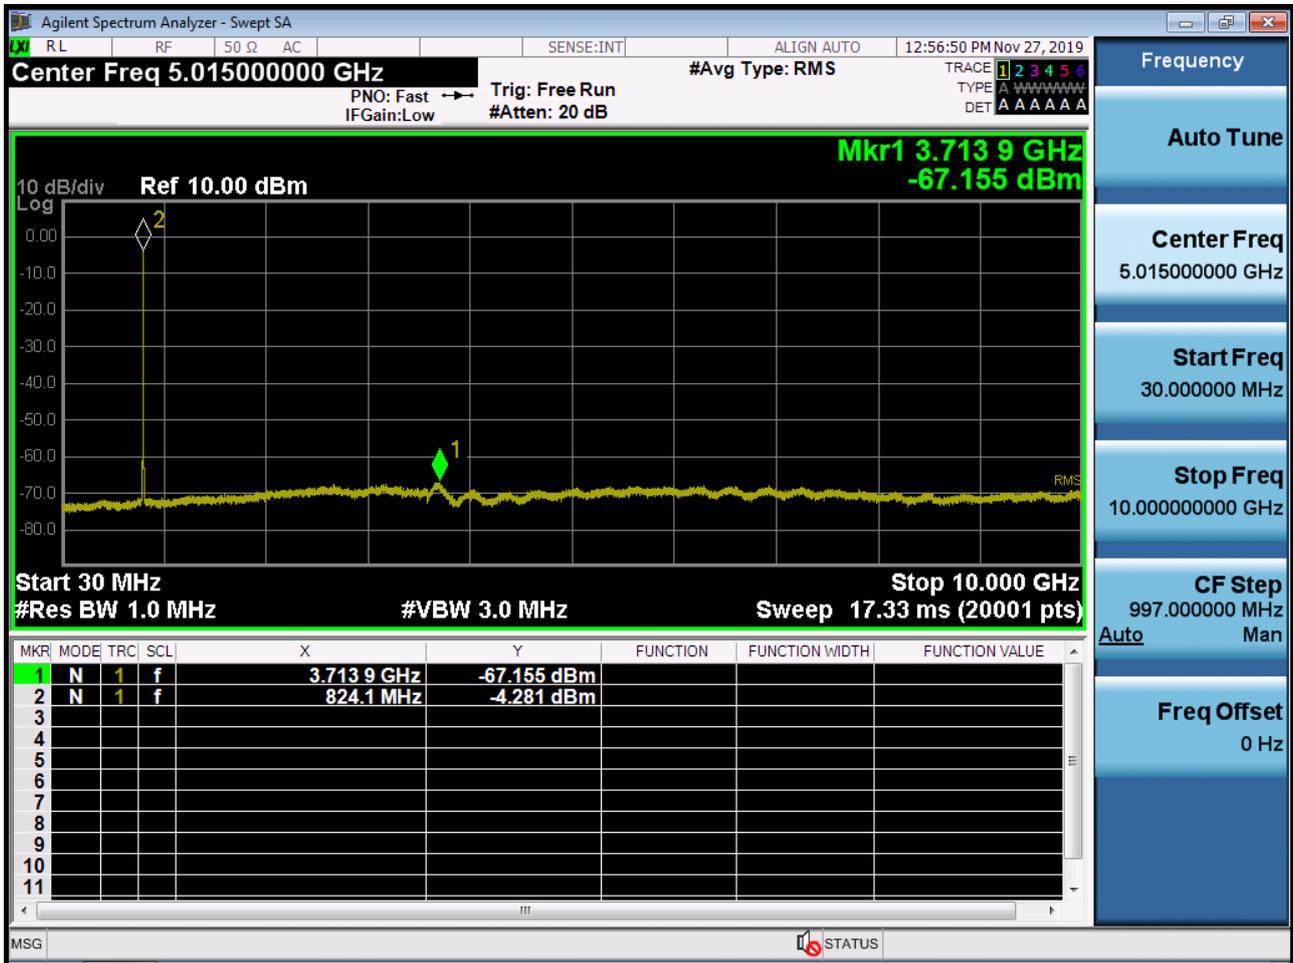

BAND 26. Conducted Spurious (26740 ch_10MHz_QPSK_RB 1_0)

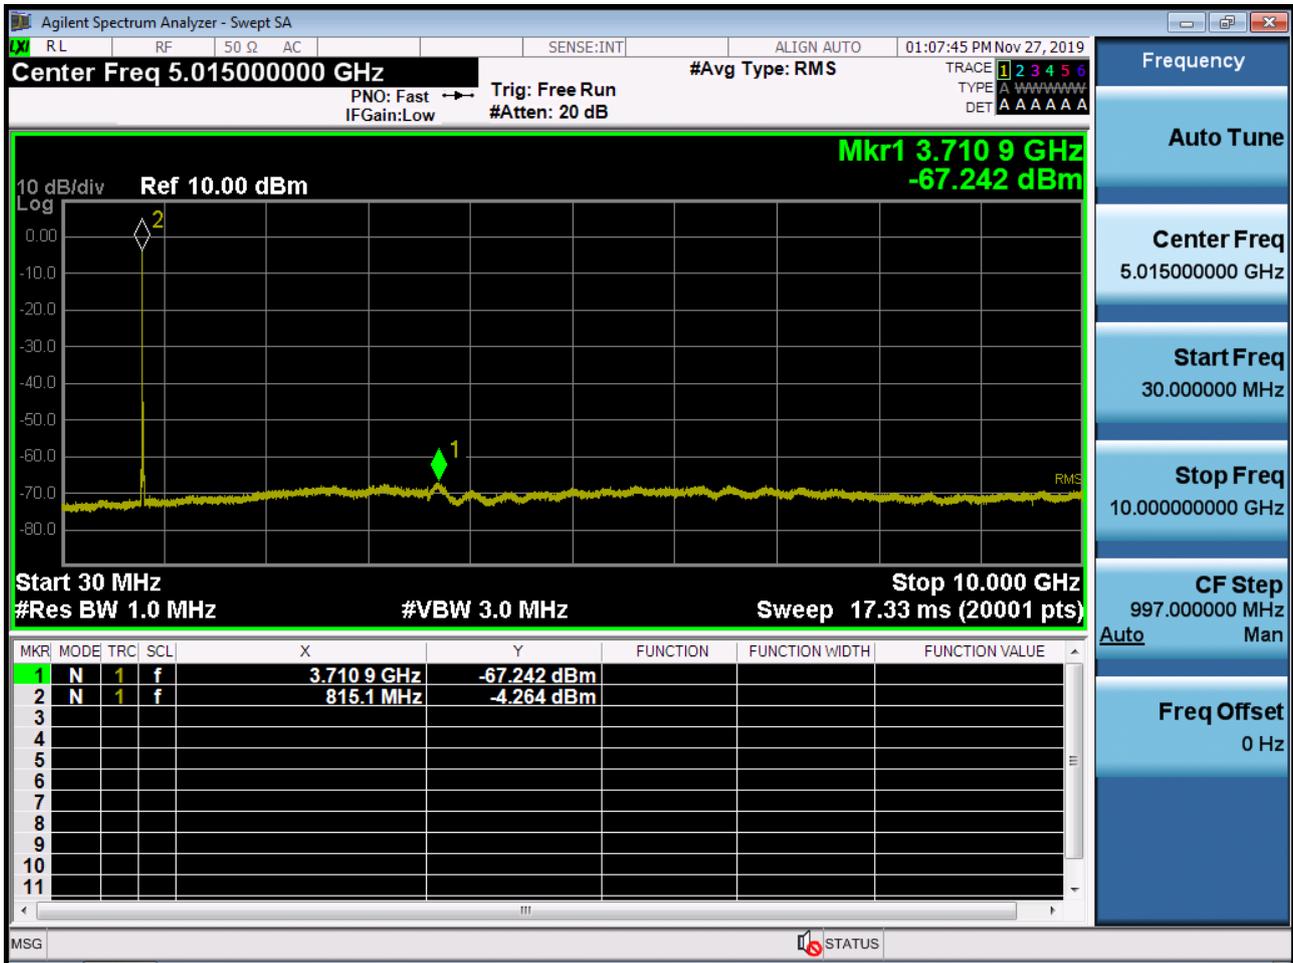


BAND 26. Conducted Spurious (26765 ch_15MHz_QPSK_RB 1_0)

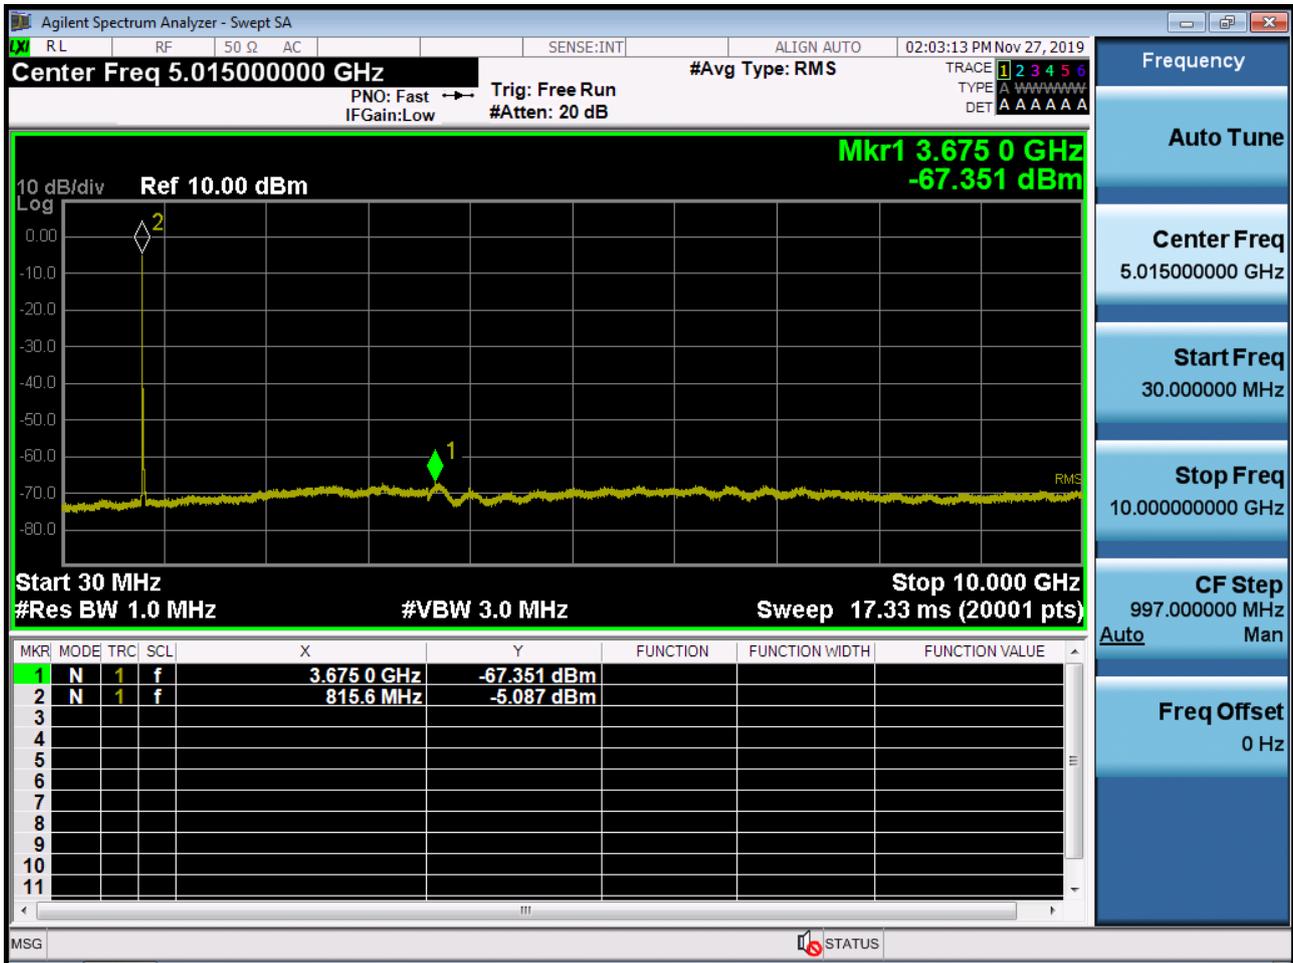


10. TEST PLOTS (STRADDLE CHANNEL)


BAND 26. Conducted Spurious (1.4MHz_QPSK_RB 1_0)

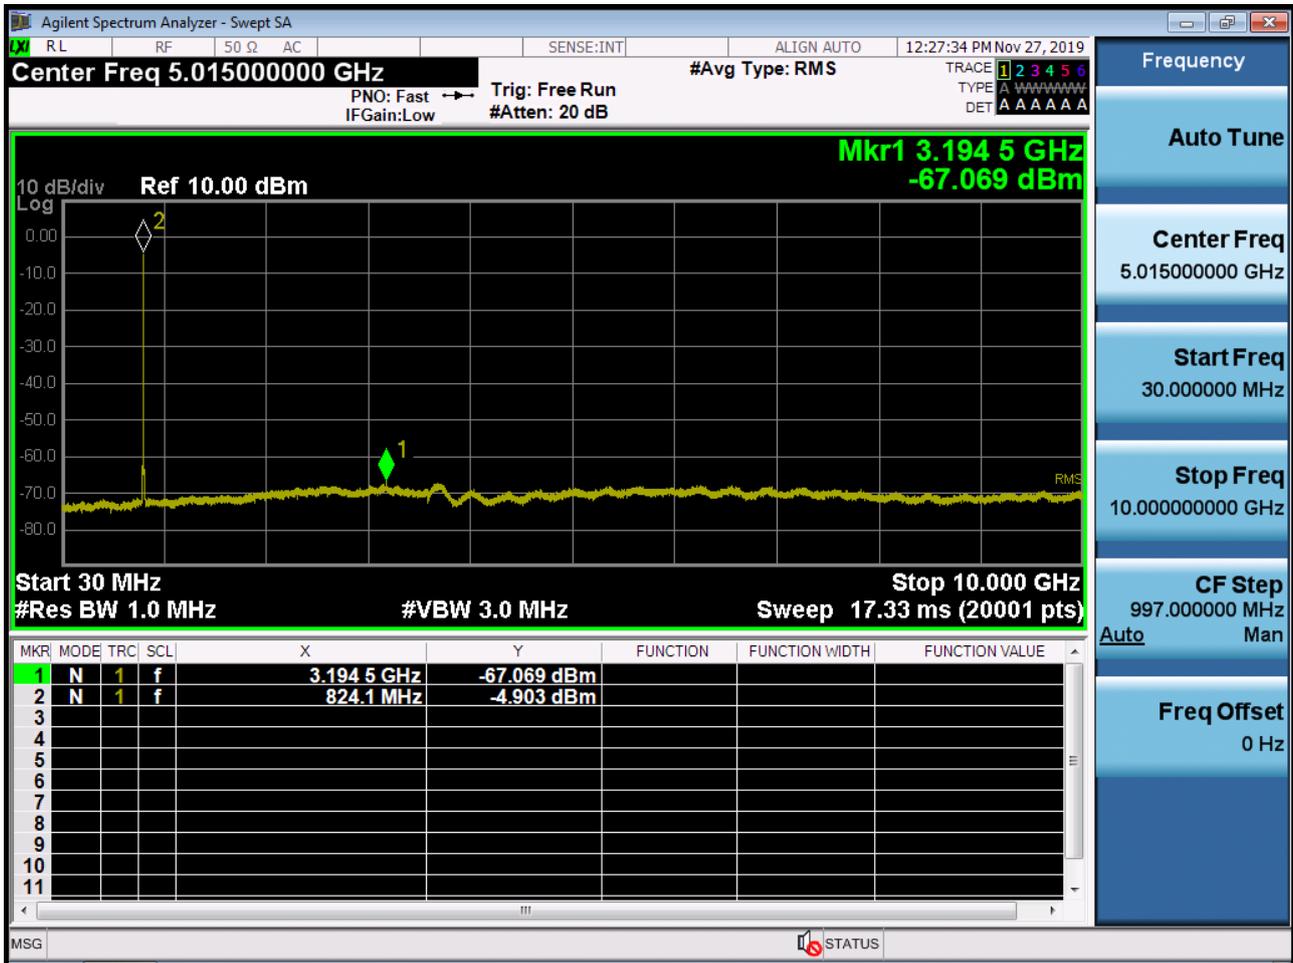


BAND 26. Conducted Spurious (3MHz_QPSK_RB 1_0)

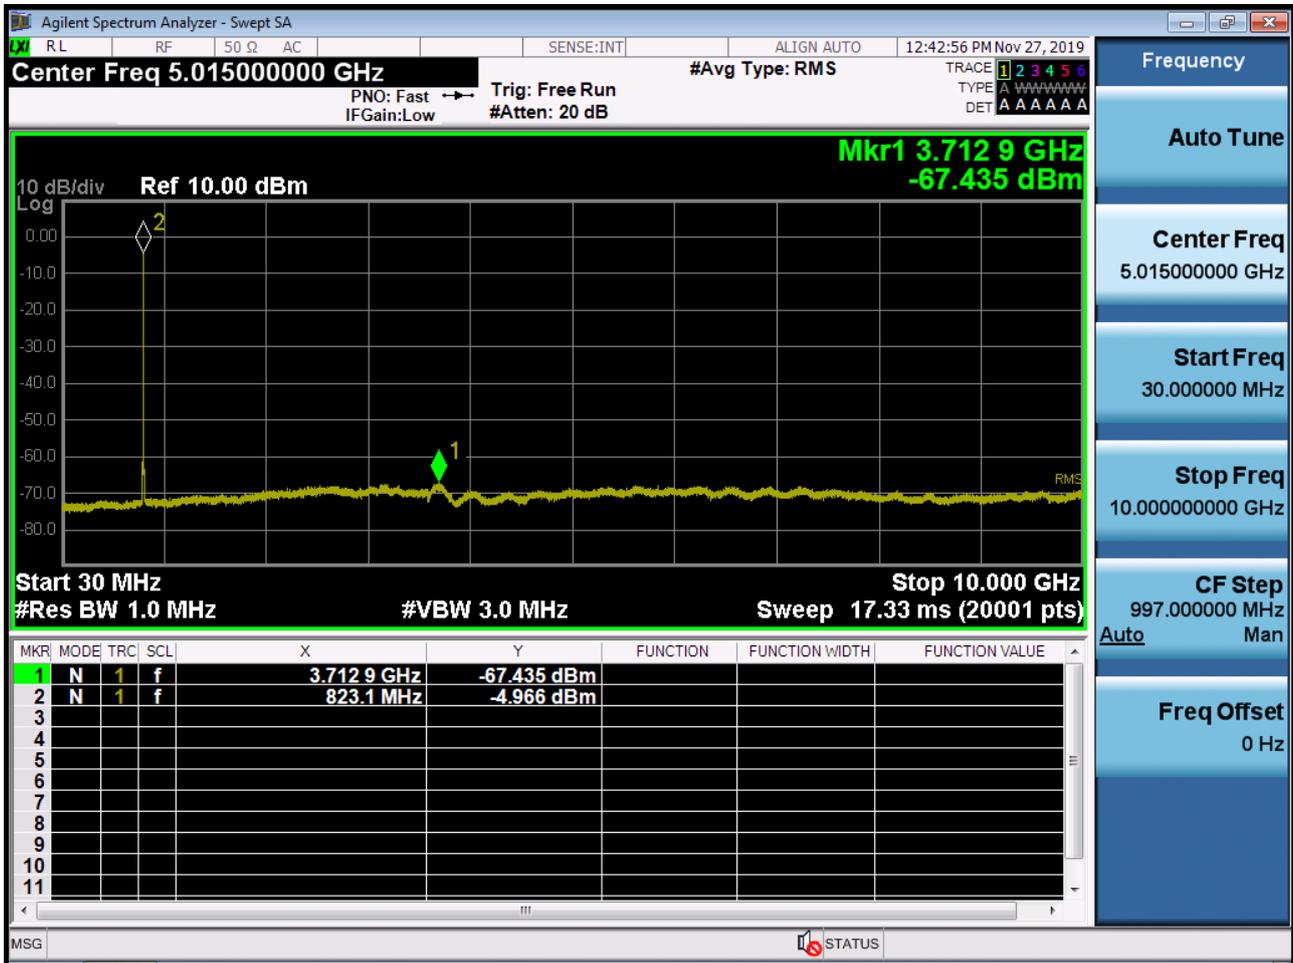


BAND 26. Conducted Spurious (5MHz_QPSK_RB 1_0)

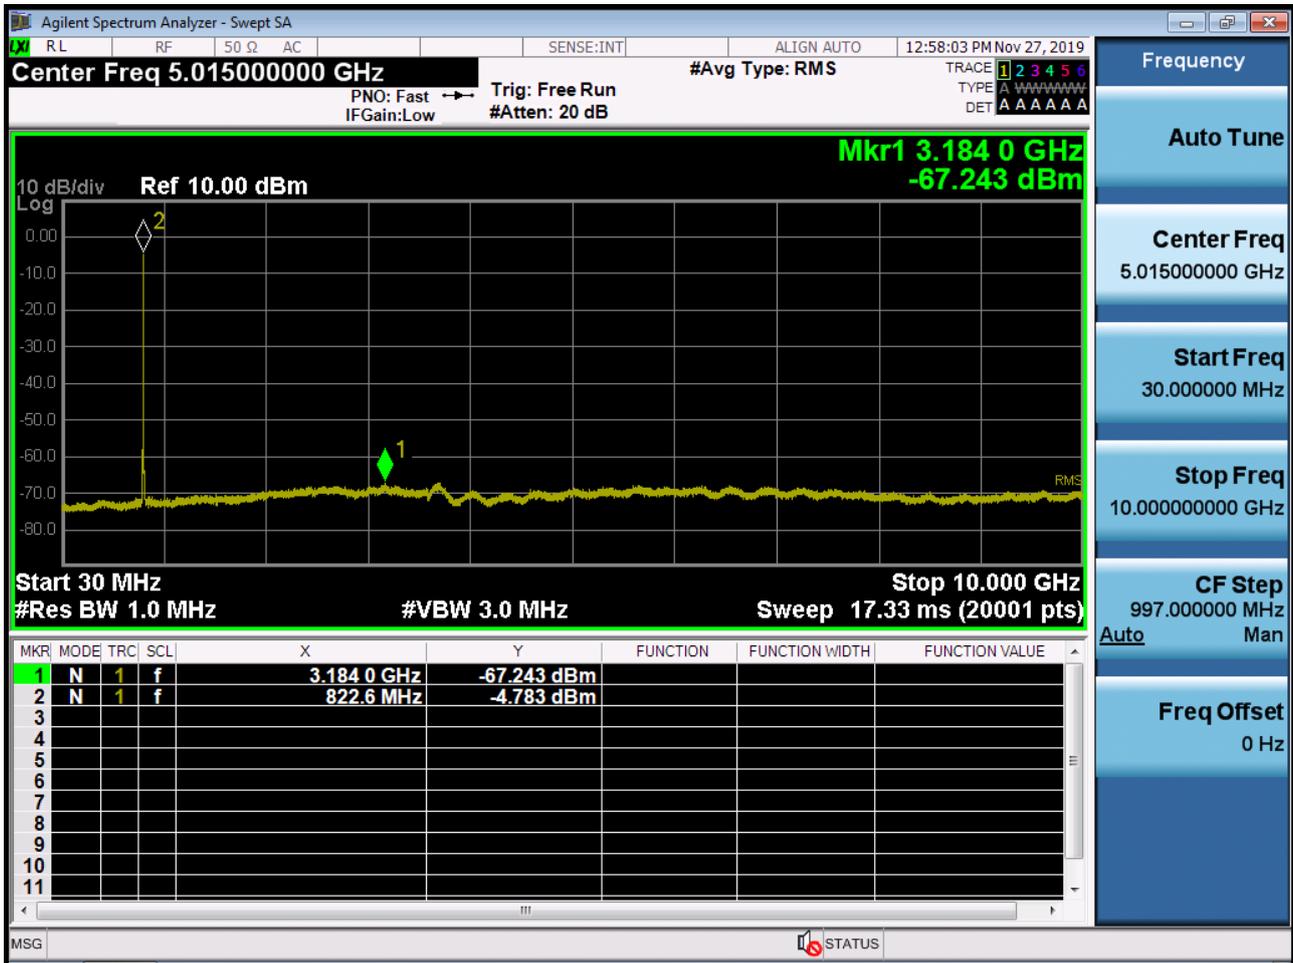


BAND 26. Conducted Spurious (10MHz_QPSK_RB 1_0)

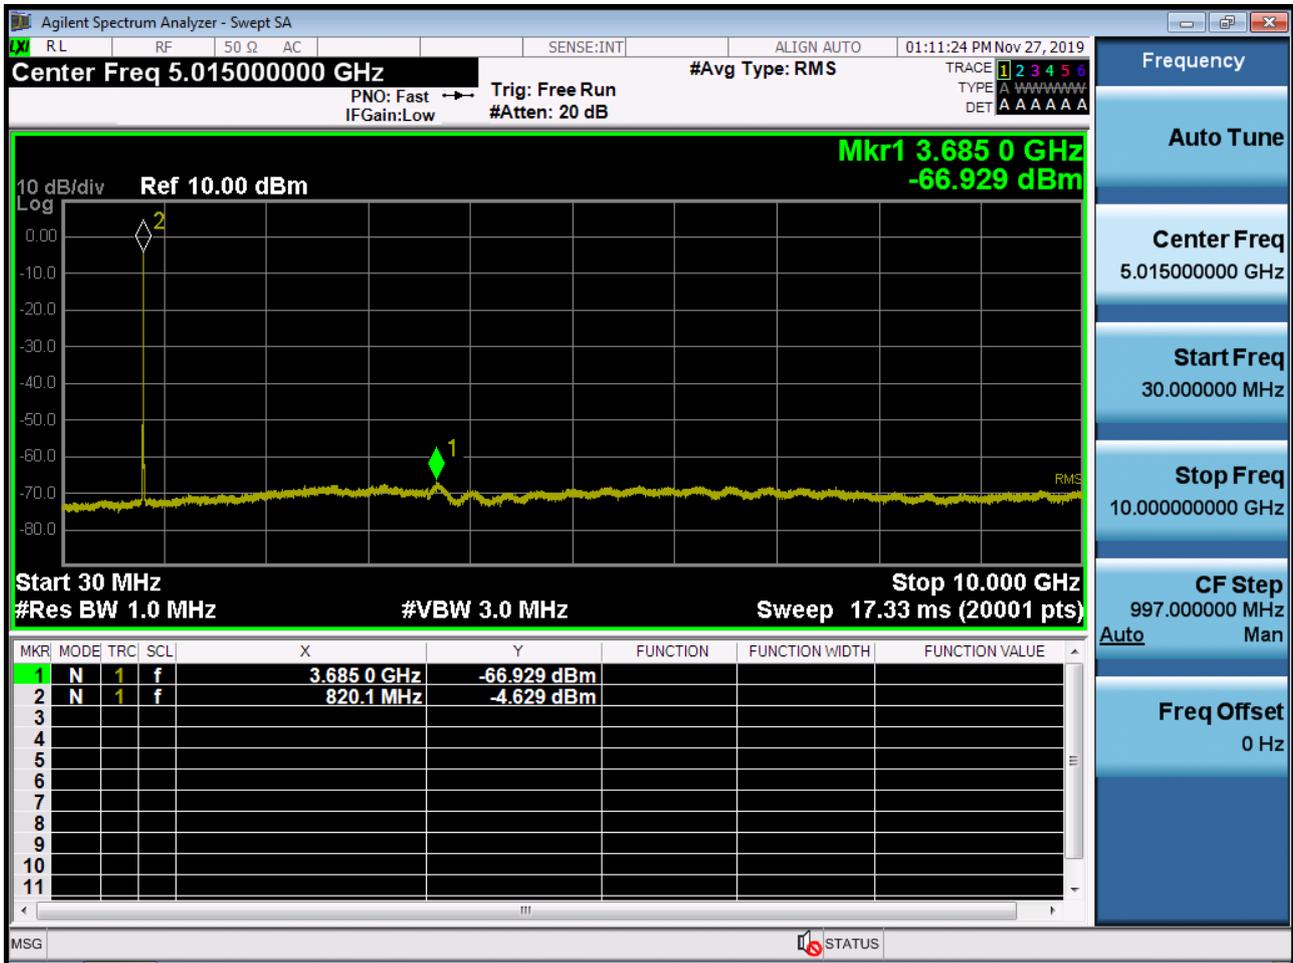


BAND 26. Channel Edge (1.4MHz_QPSK_RB 1_0)

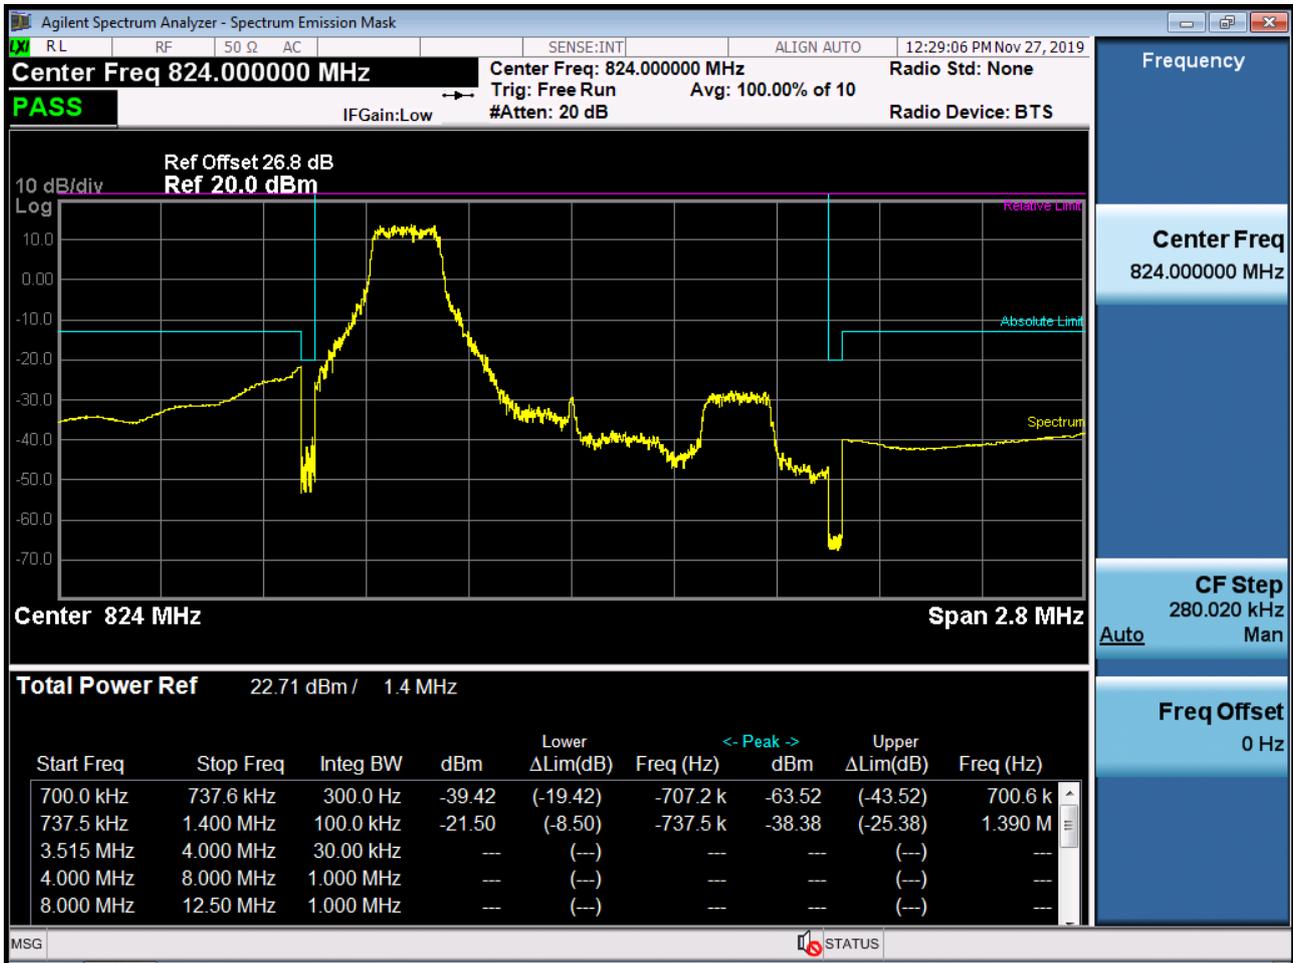


BAND 26. Channel Edge (1.4MHz_QPSK_RB 1_5)

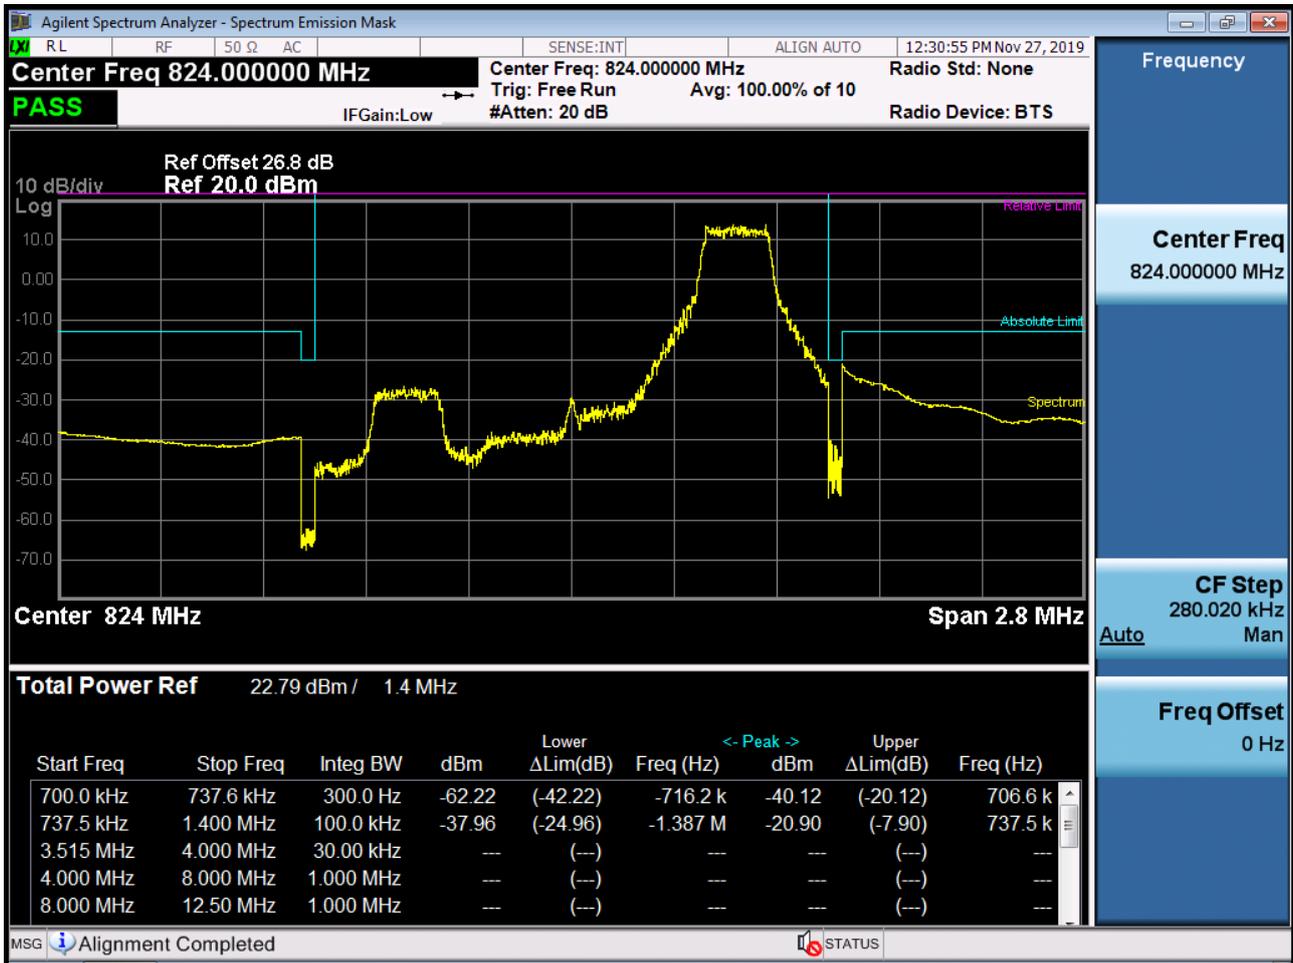


BAND 26. Channel Edge (1.4MHz_QPSK_Full RB)

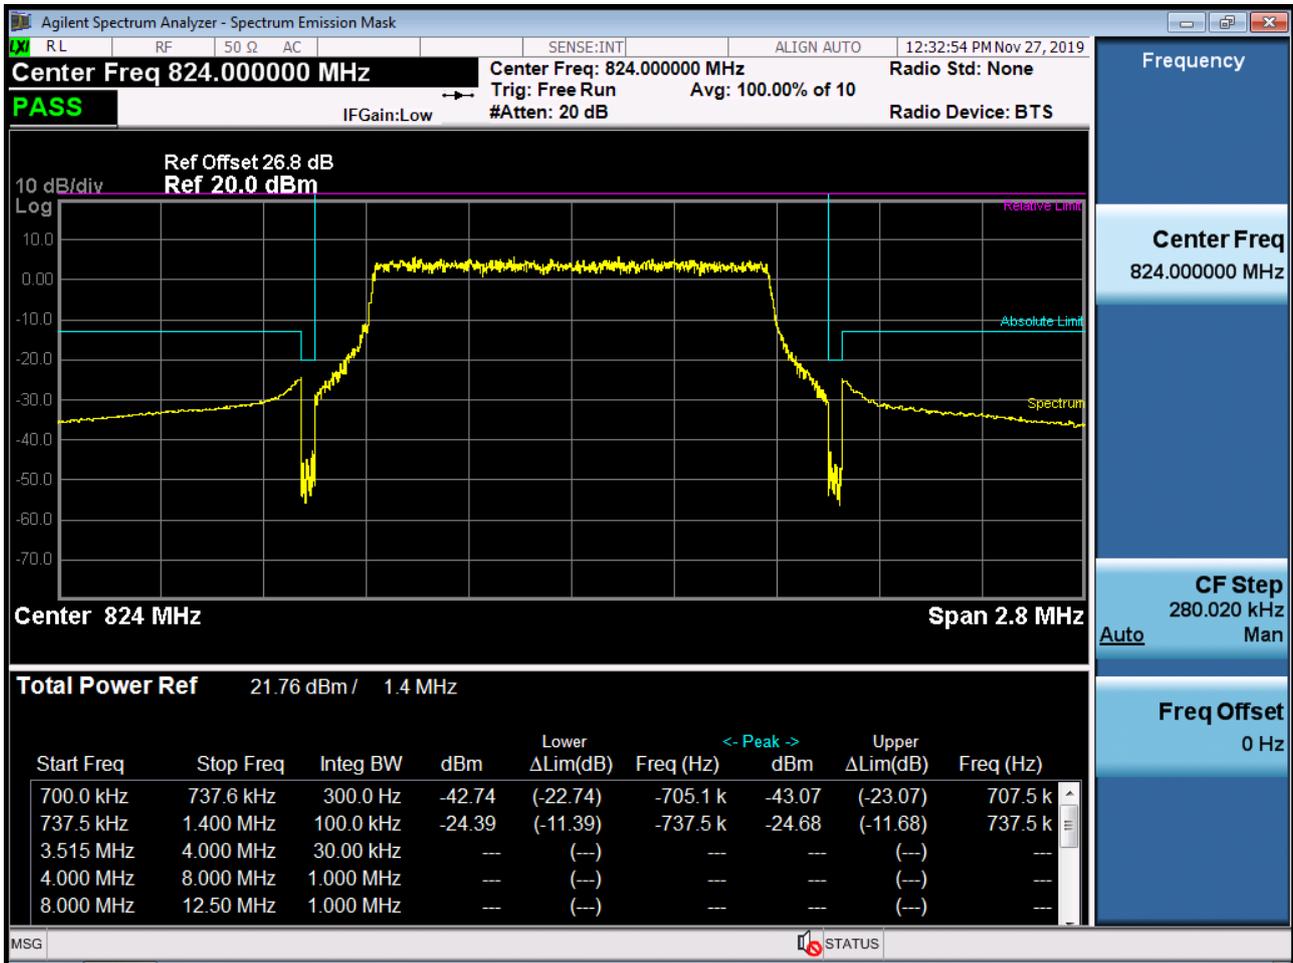


BAND 26. Channel Edge (3MHz_QPSK_RB 1_0)

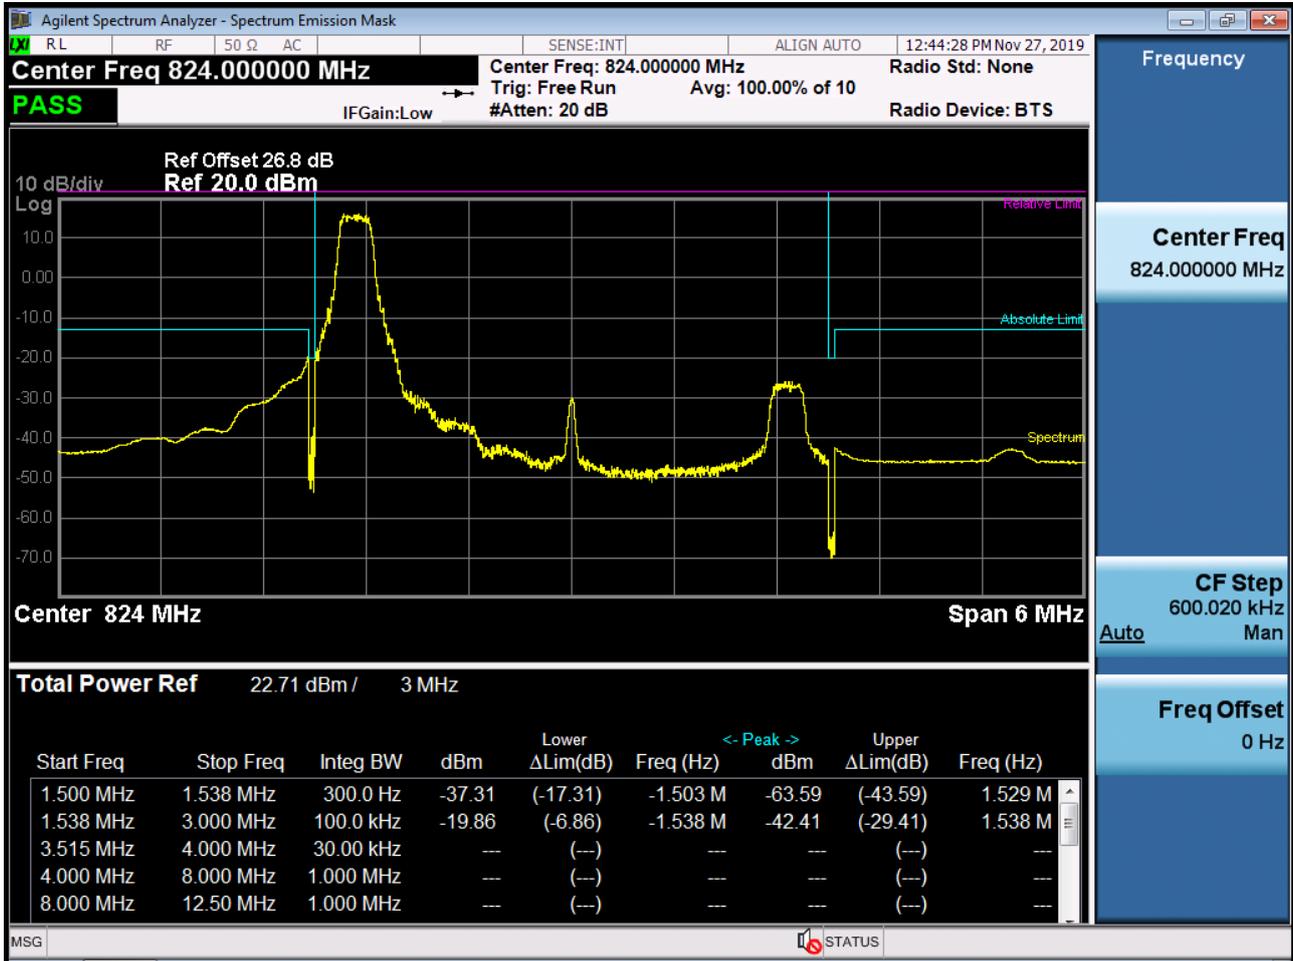


BAND 26. Channel Edge (3MHz_QPSK_RB 1_14)

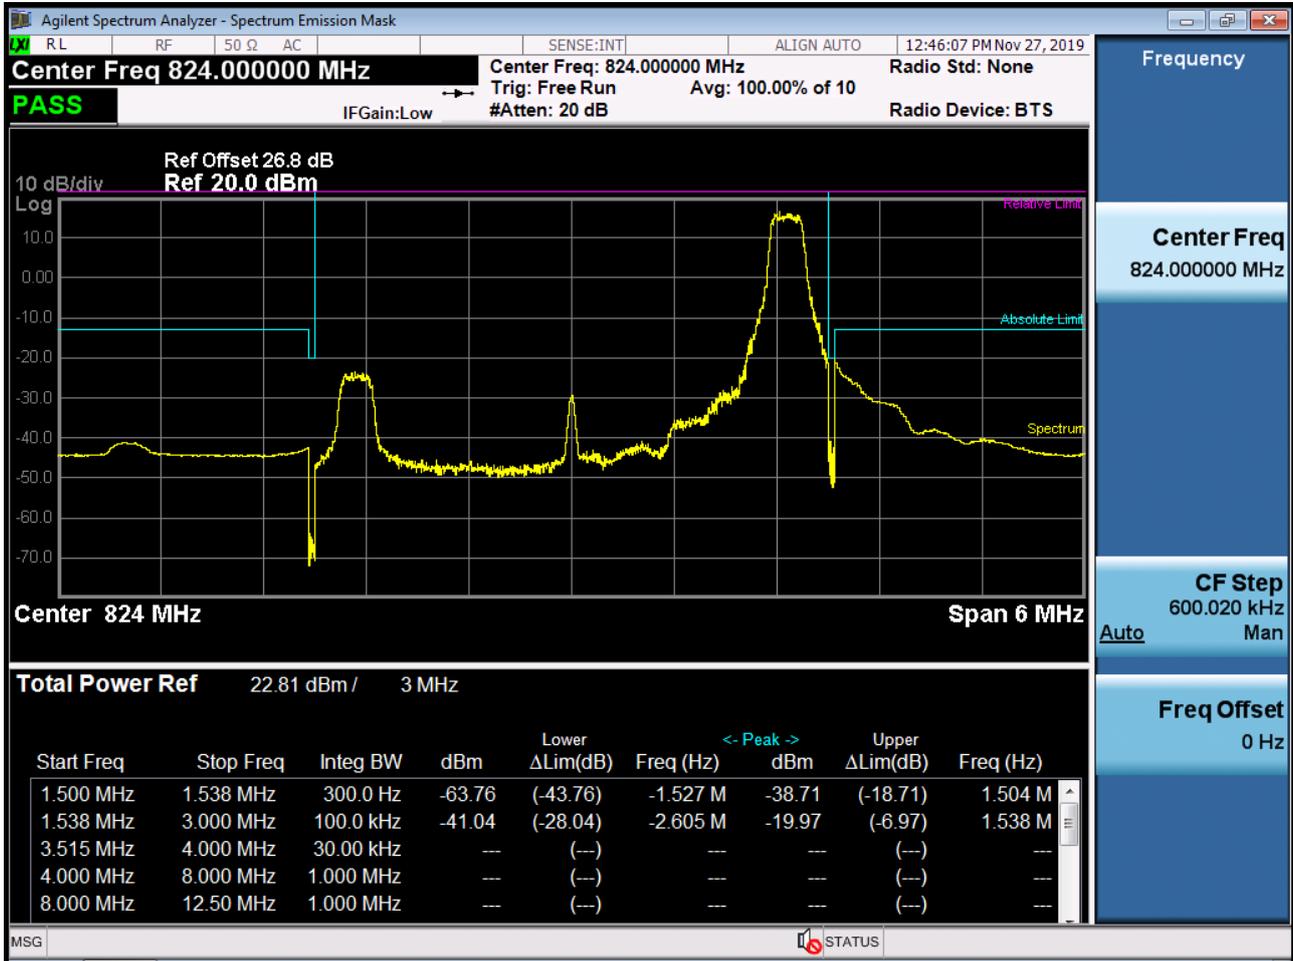


BAND 26. Channel Edge (3MHz_QPSK_Full RB)

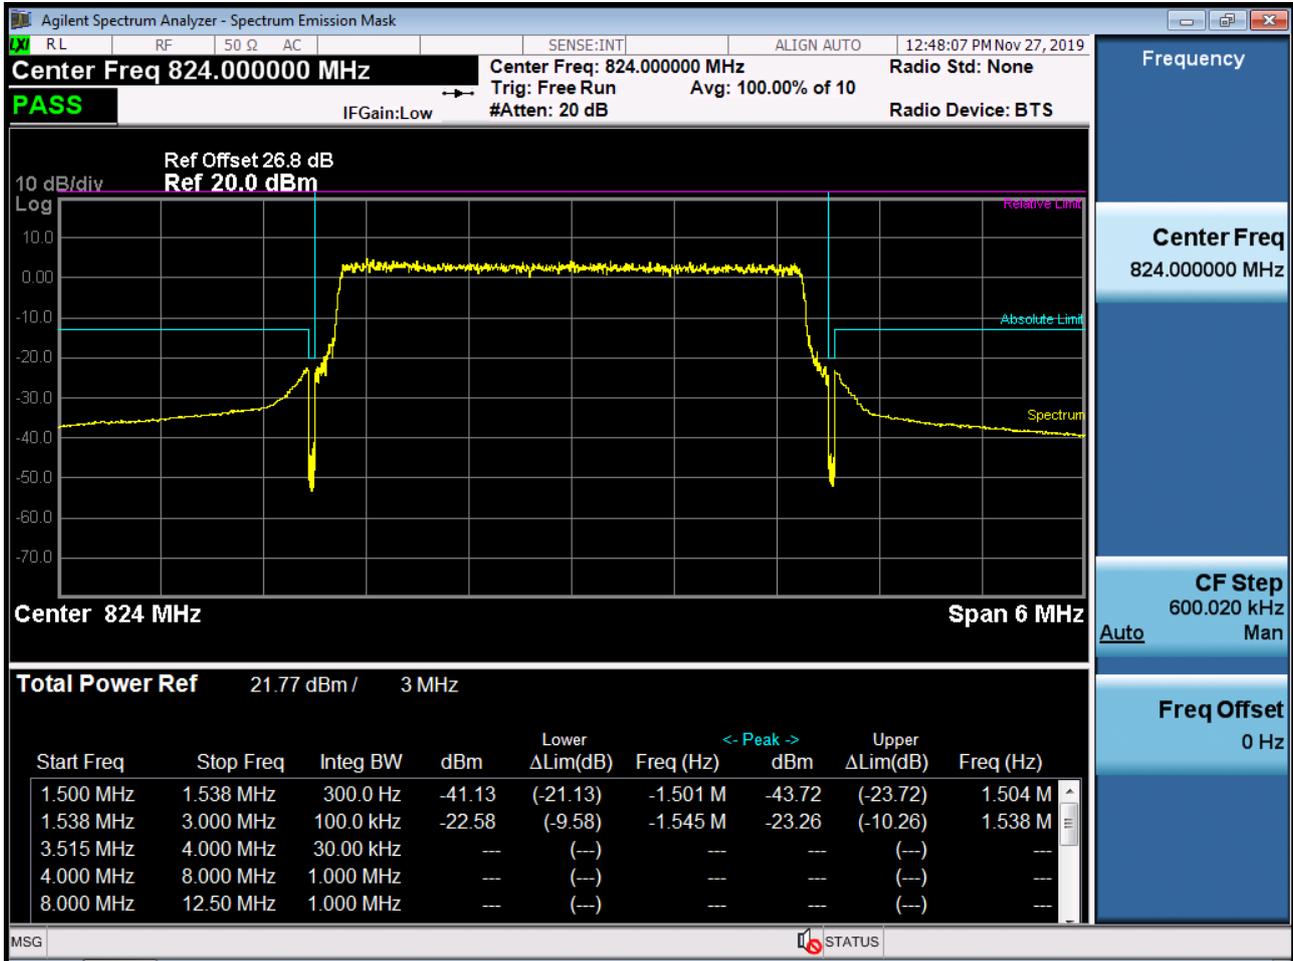


BAND 26. Channel Edge (5MHz_QPSK_RB 1_0)

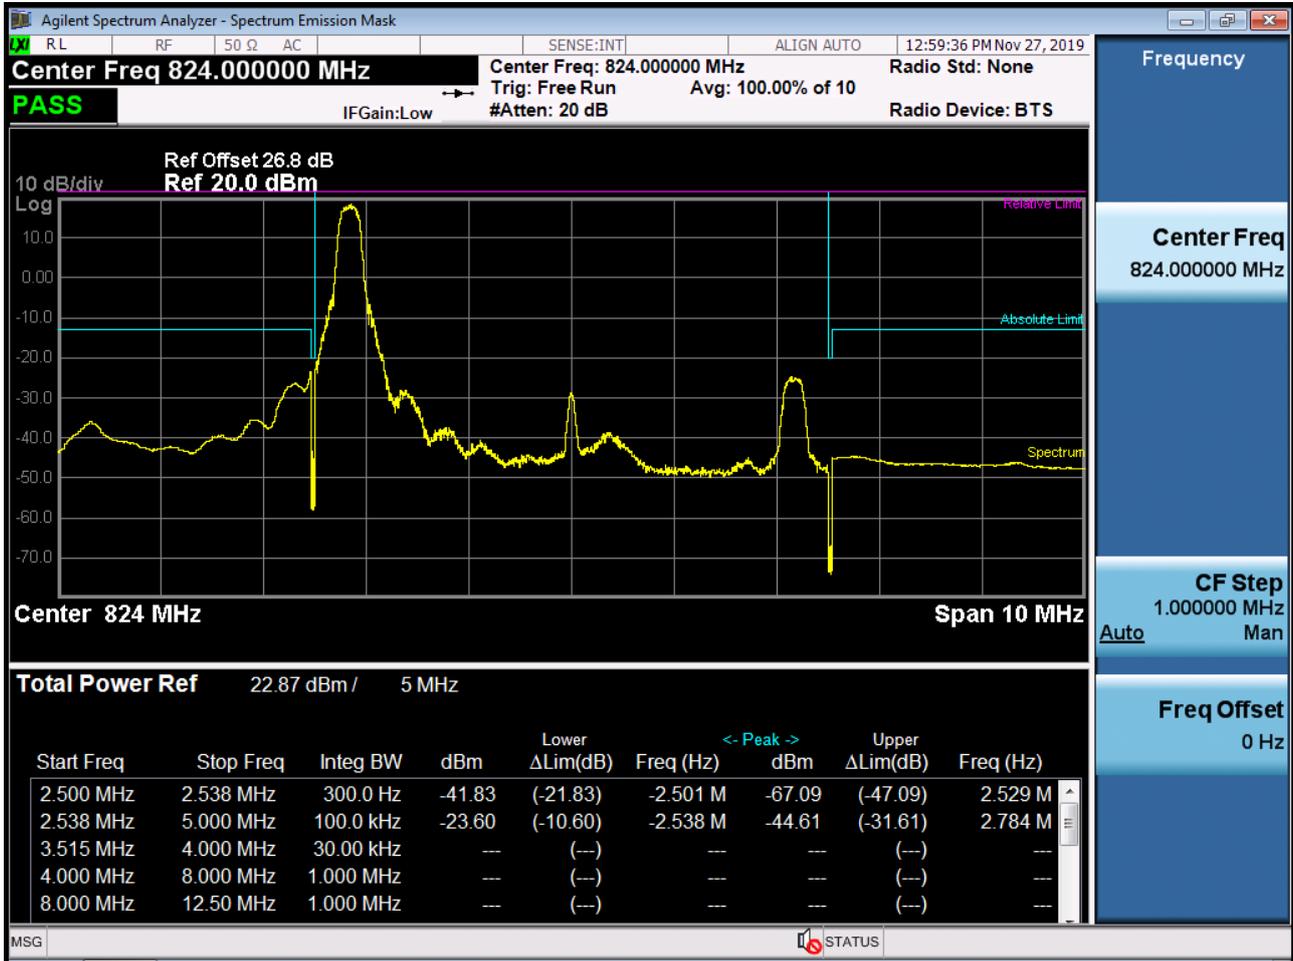


BAND 26. Channel Edge (5MHz_QPSK_RB 1_24)

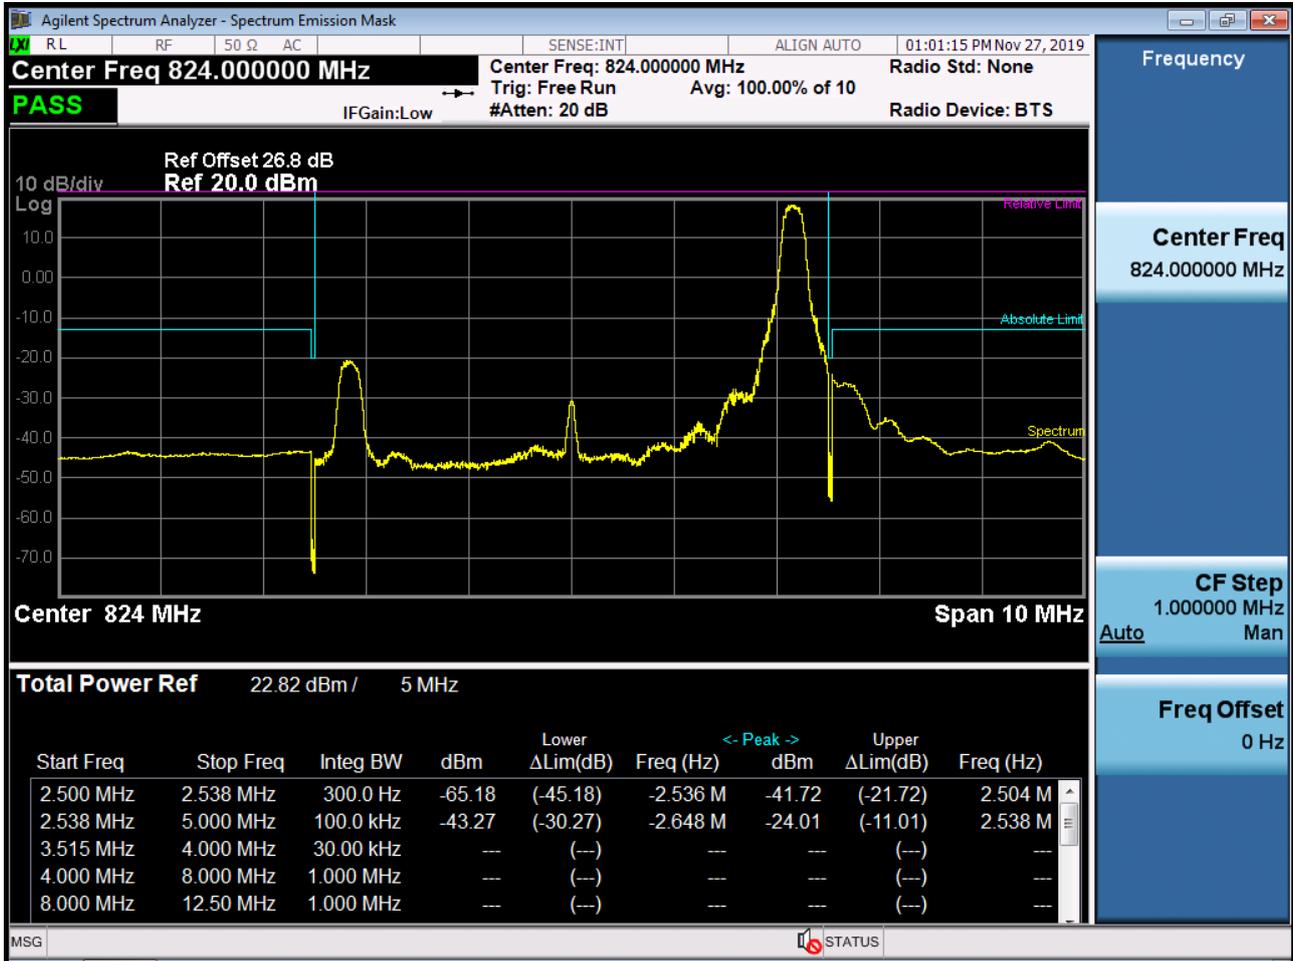


BAND 26. Channel Edge (5MHz_QPSK_Full RB)

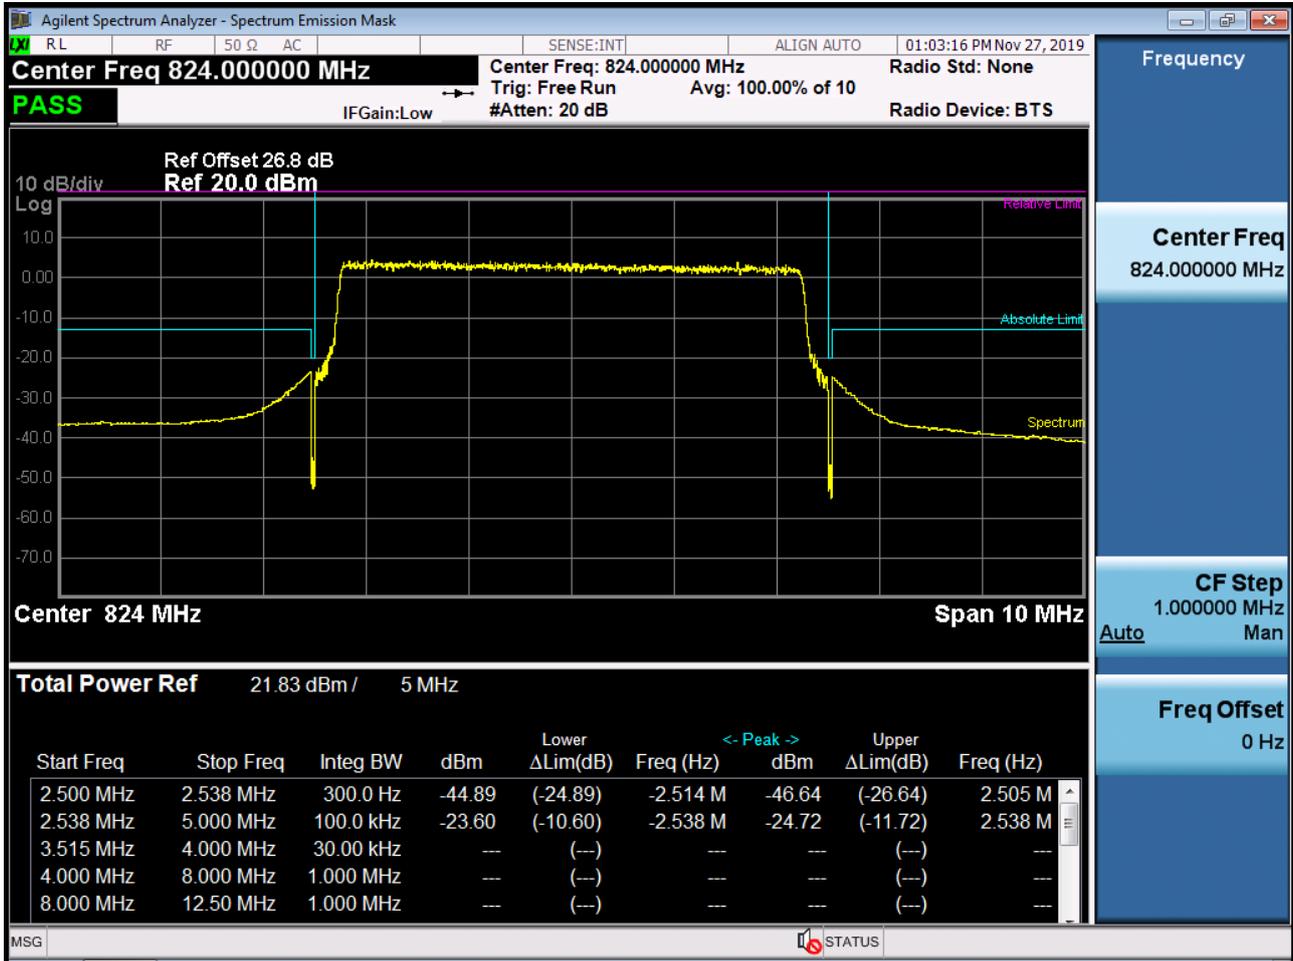


BAND 26. Channel Edge (10MHz_QPSK_RB 1_0)

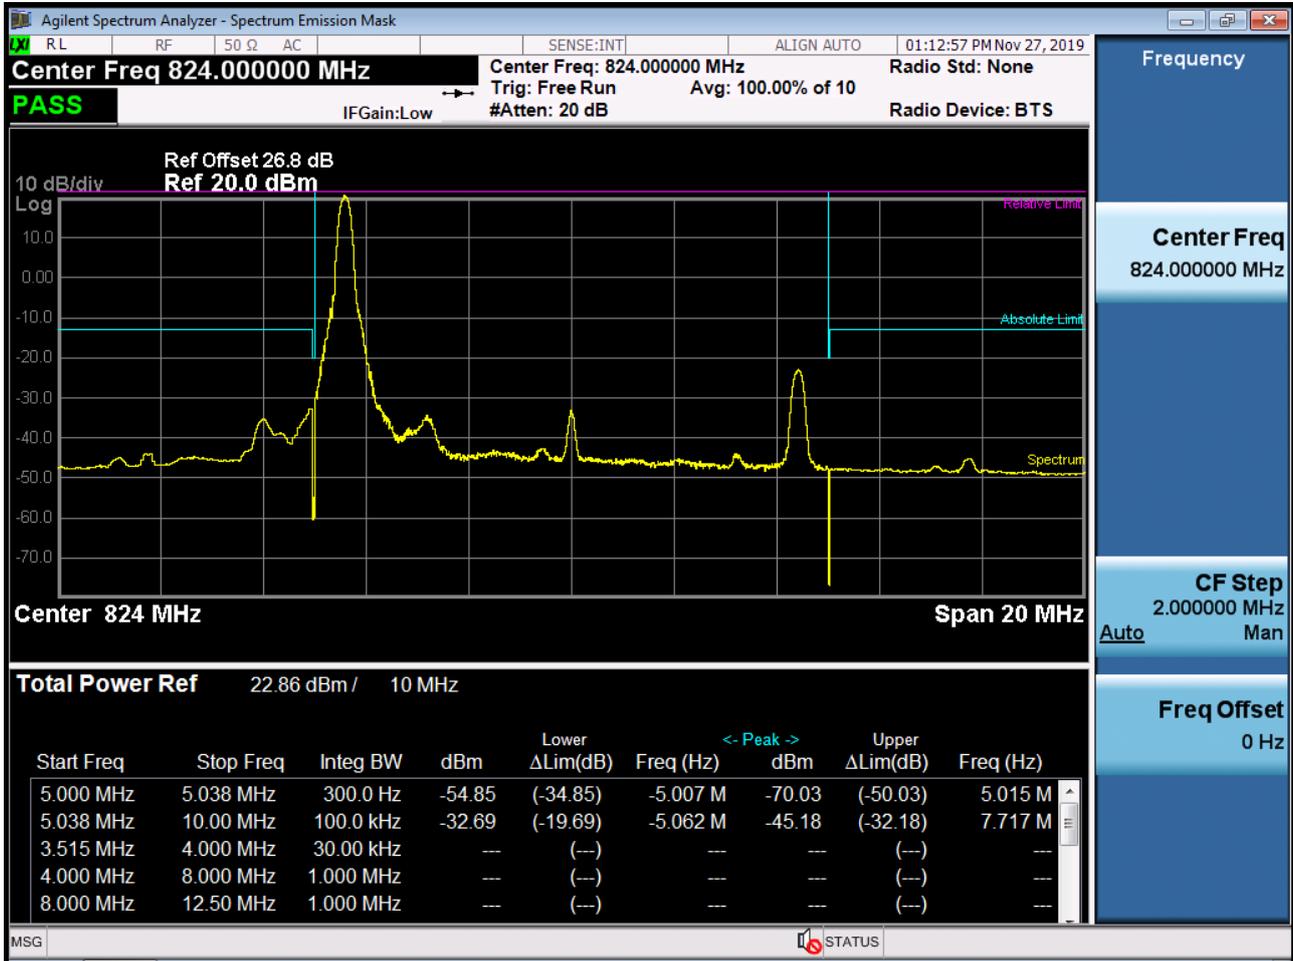

BAND 26. Channel Edge (10MHz_QPSK_RB 1_49)

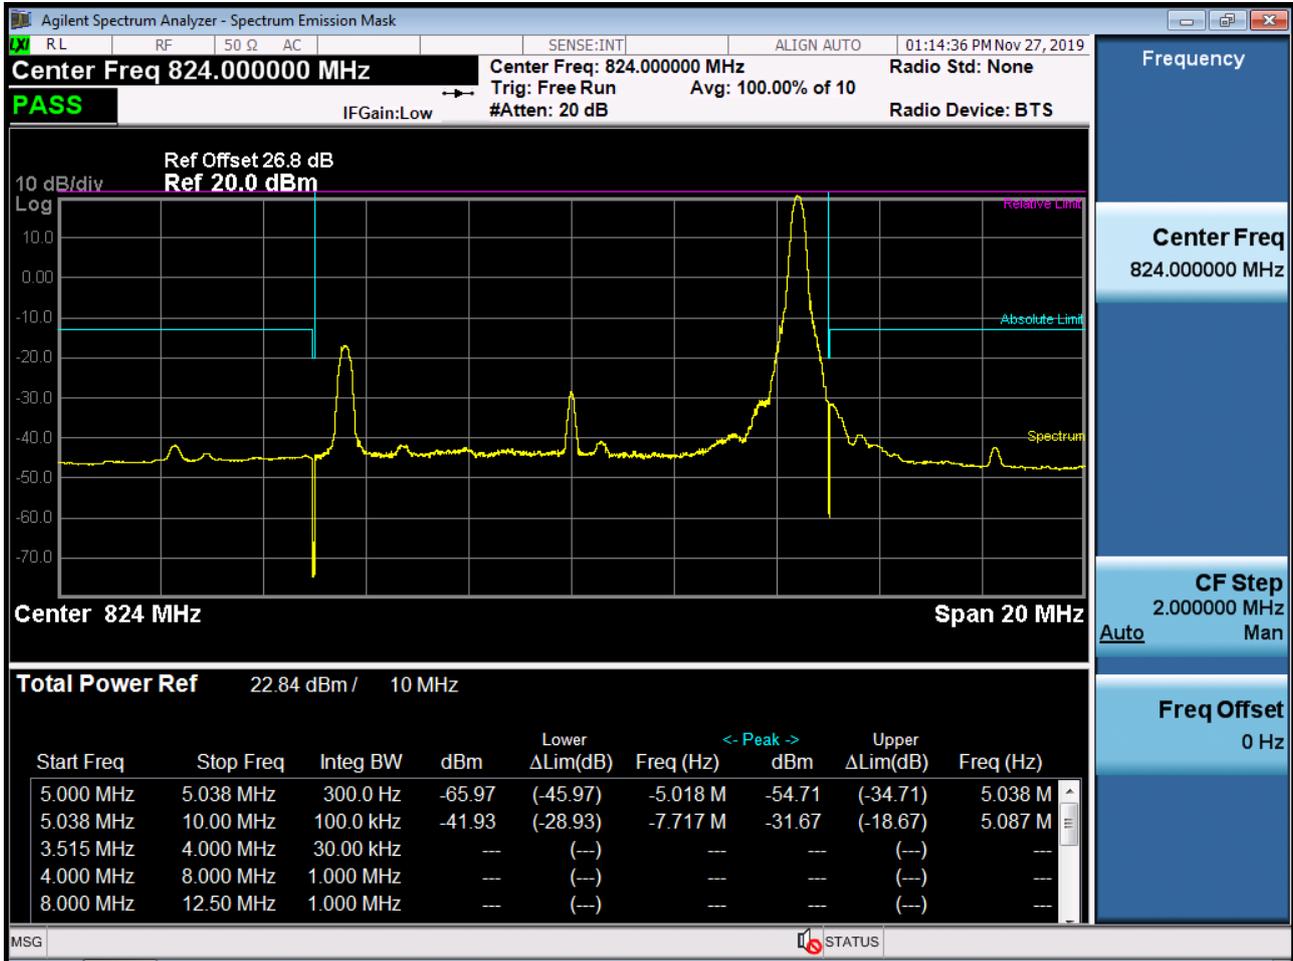


BAND 26. Channel Edge (10MHz_QPSK_Full RB)

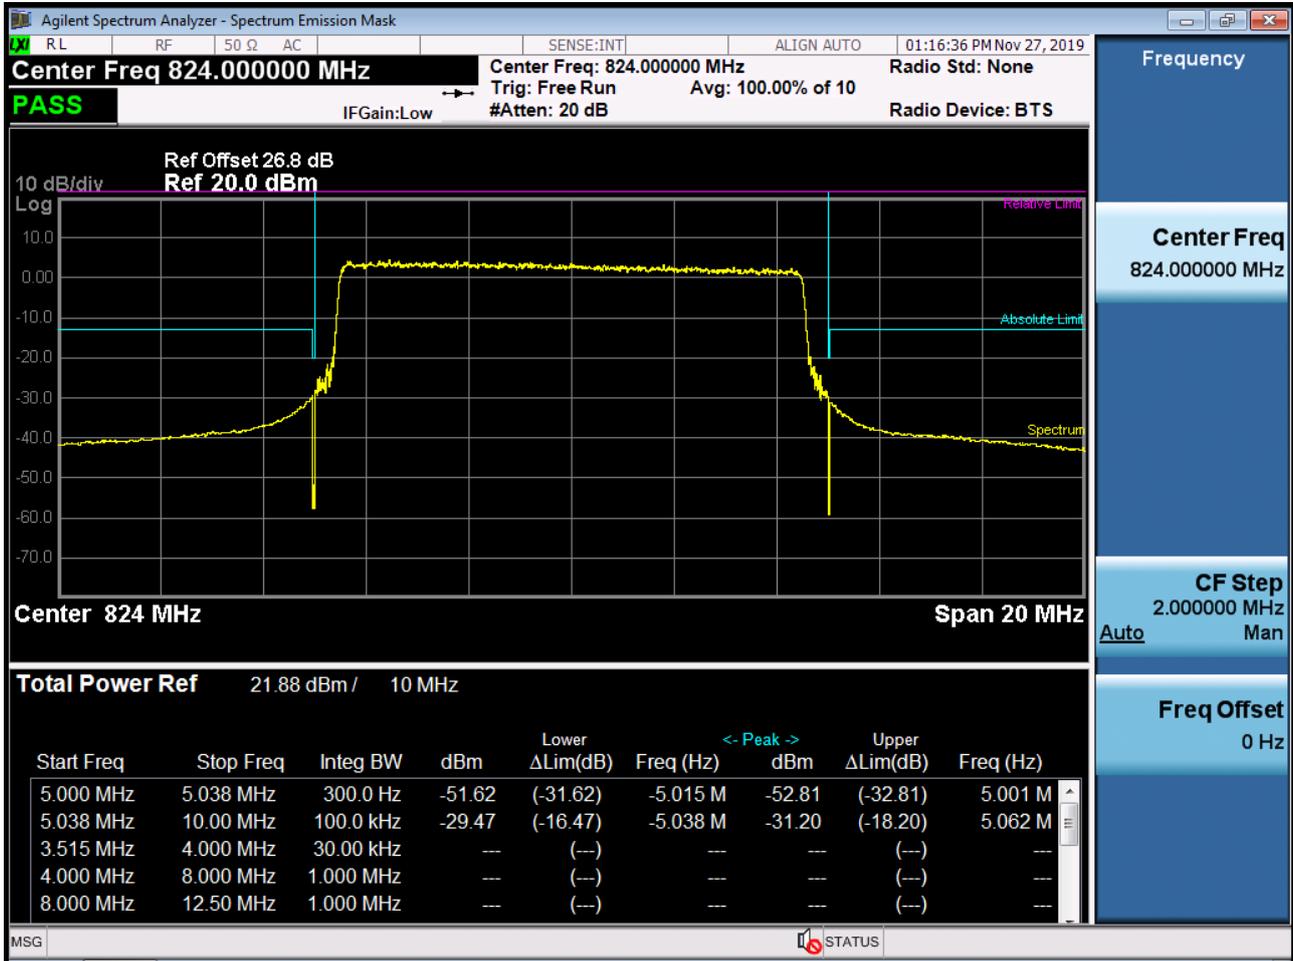


BAND 26. Band Edge (1.4MHz_QPSK_RB 1_5)




BAND 26. Band Edge (1.4MHz_QPSK_FullIRB)

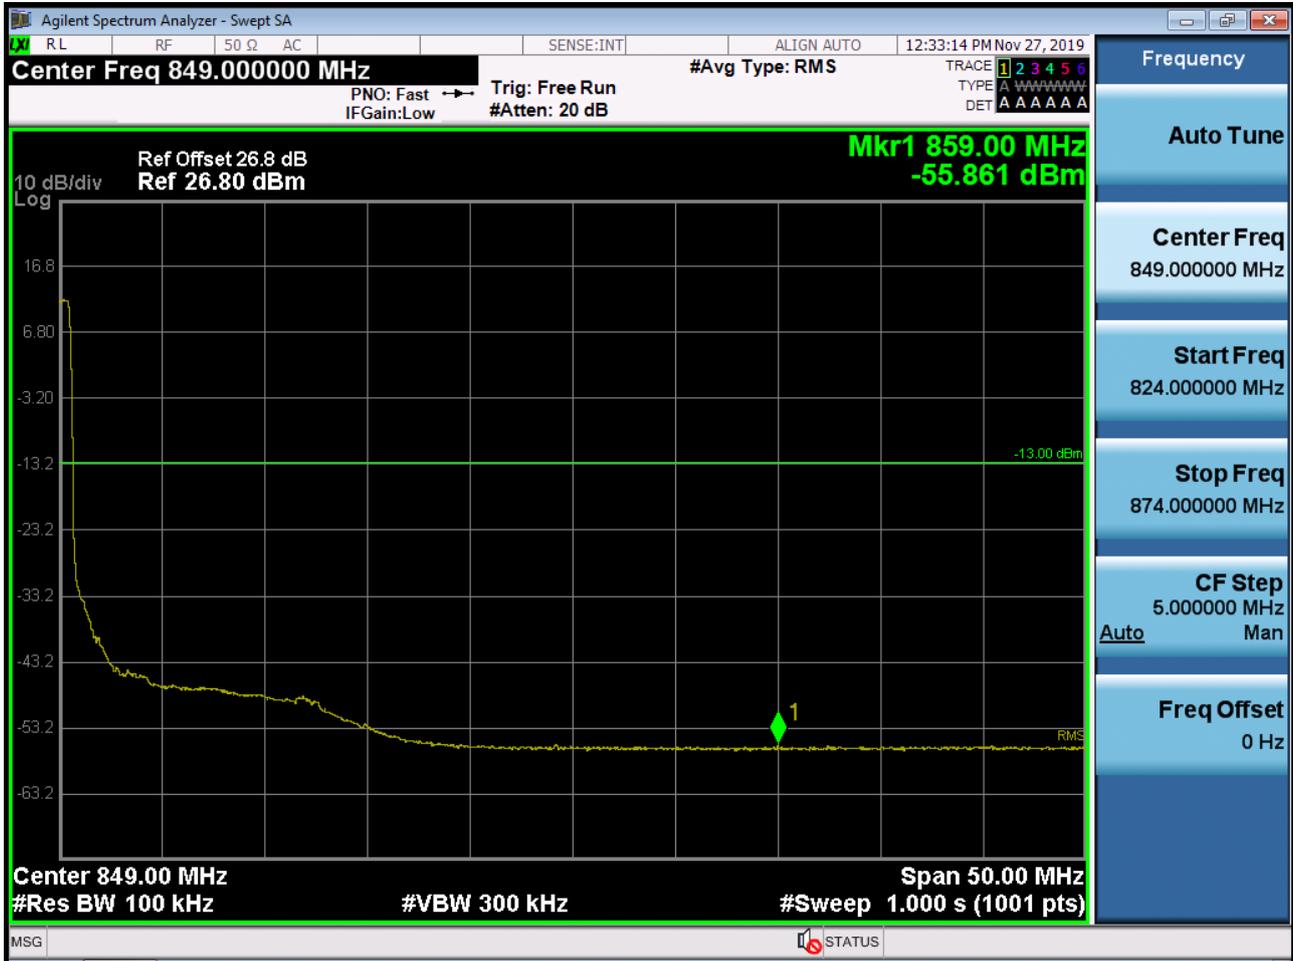

BAND 26. Band Edge (3MHz_QPSK_RB 1_14)

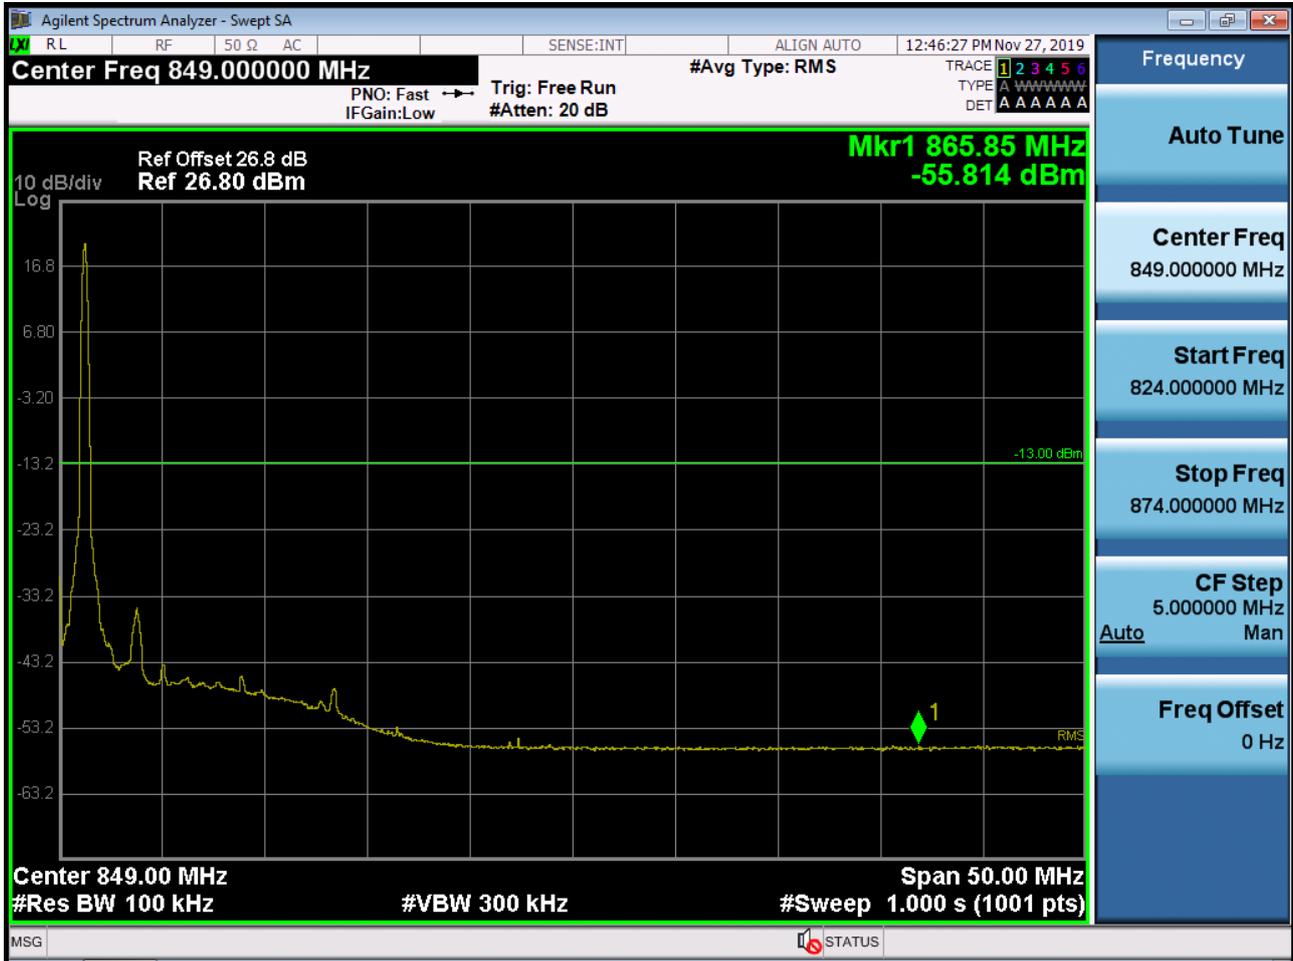


BAND 26. Band Edge (3MHz_QPSK_ Full RB)

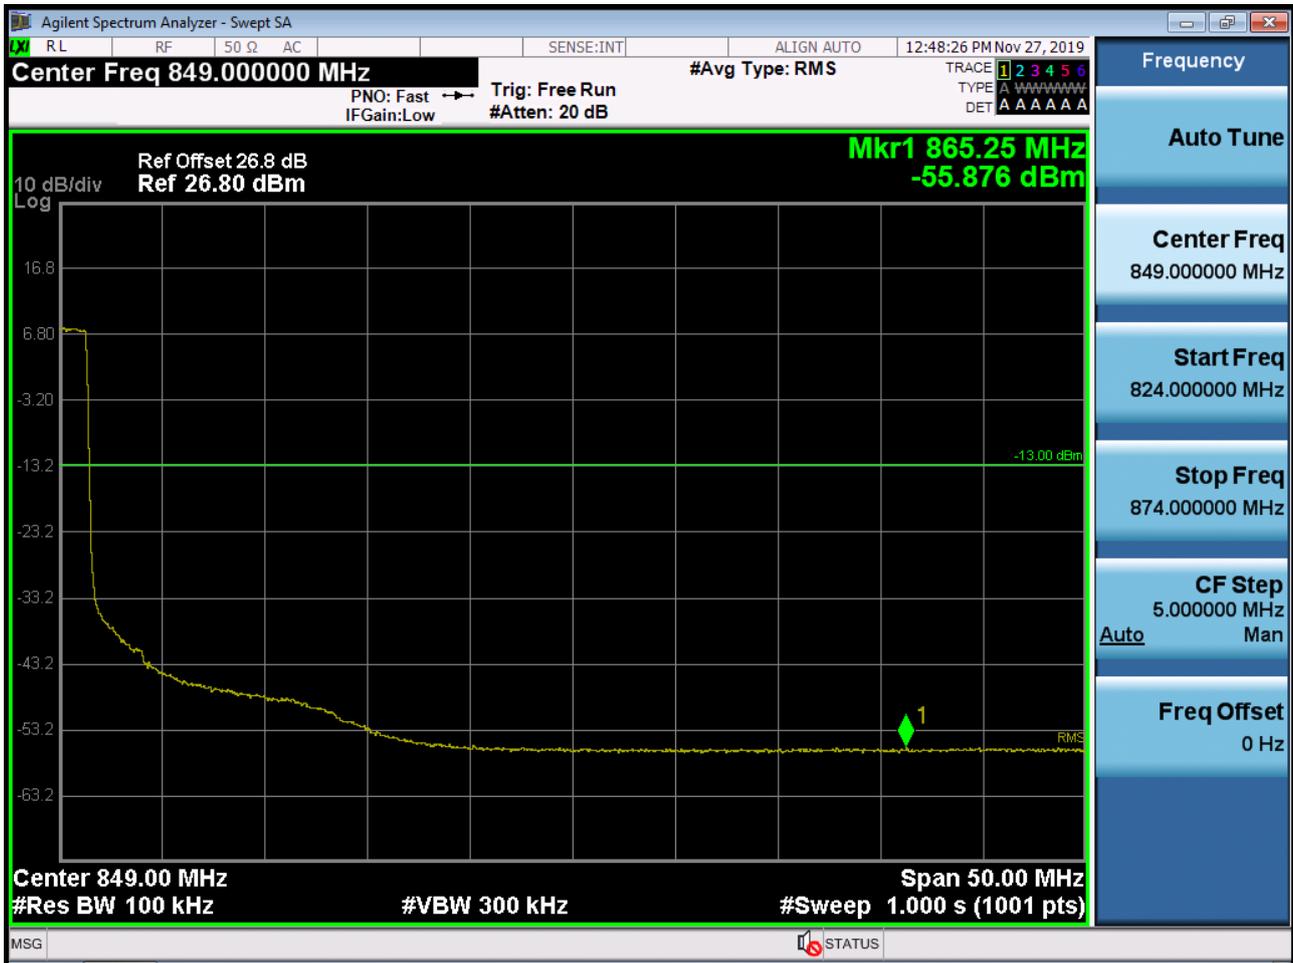

BAND 26. Band Edge (5MHz_QPSK_RB 1_24)



BAND 26. Band Edge (5MHz_QPSK_ Full RB)

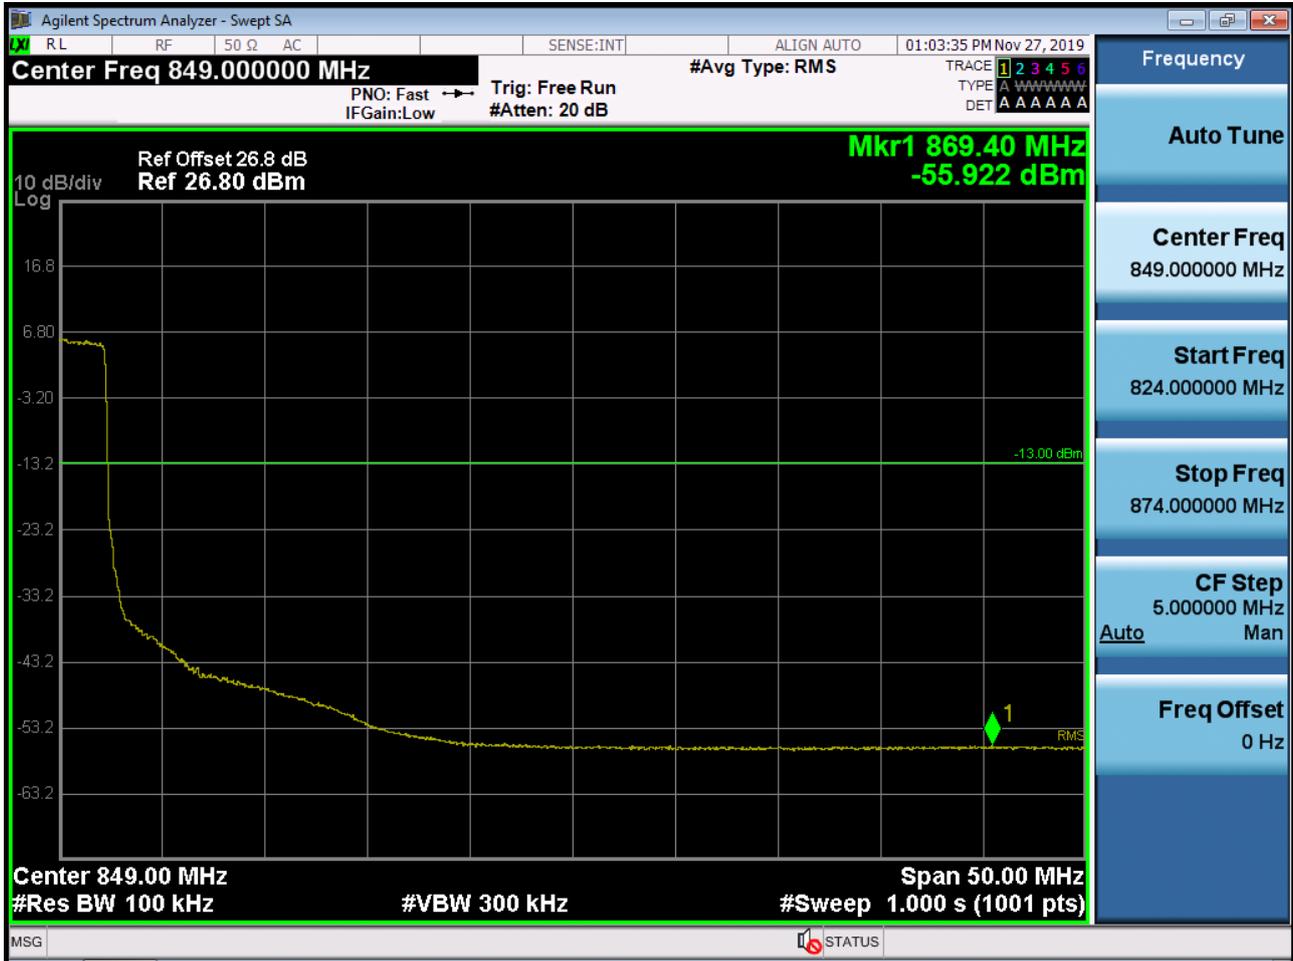

BAND 26. Band Edge (10MHz_QPSK_RB 1_49)



BAND 26. Band Edge (10MHz_QPSK_ Full RB)



11 ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2001-FC028-P