



PCTEST

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.pctest.com>



MEASUREMENT REPORT

FCC PART 15.407 / ISED RSS-247 UNII 802.11ax OFDMA

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
11/14/2019 - 1/31/2020
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M1911140187-09-R1.A3L

FCC ID:	A3LSMG988U
IC:	649E-SMG988U
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type:	Certification
Model:	SM-G988U
Additional Model(s):	SM-G988U1, SM-G988W
HVIN:	SM-G988W
EUT Type:	Portable Handset
Frequency Range:	5180 – 5825MHz
FCC Classification:	Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s):	Part 15 Subpart E (15.407)
ISED Specification:	RSS-247 Issue 2
Test Procedure(s):	ANSI C63.10-2013, KDB 789033 D02 v02r01, KDB 648474 D03 v01r04, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This revised Test Report (S/N: 1M1911140187-09-R1.A3L) supersedes and replaces the previously issued test report (S/N: 1M1911140187-09.A3L) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

Randy Ortanez
President




FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 1 of 270	


TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope.....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration.....	8
2.4	EMI Suppression Device(s)/Modifications.....	8
3.0	DESCRIPTION OF TESTS	9
3.1	Evaluation Procedure	9
3.2	Radiated Emissions.....	9
3.3	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS	10
5.0	MEASUREMENT UNCERTAINTY	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS	13
7.1	Summary.....	13
7.2	26dB Bandwidth Measurement – 802.11ax OFDMA.....	15
7.3	6dB Bandwidth Measurement – 802.11ax OFDMA.....	40
7.4	UNII Output Power Measurement – 802.11ax OFDMA.....	49
7.5	Maximum Power Spectral Density – 802.11ax OFDMA.....	69
7.6	Radiated Spurious Emission Measurements – Above 1GHz	191
7.6.1	SISO Antenna-1 Radiated Spurious Emission Measurements	194
7.6.2	SISO Antenna-2 Radiated Spurious Emission Measurements	212
7.6.3	MIMO Radiated Spurious Emission Measurements	230
7.6.4	SISO Antenna-1 Radiated Band Edge Measurements (20MHz BW).....	248
7.6.5	SISO Antenna-1 Radiated Band Edge Measurements (40MHz BW).....	250
7.6.6	SISO Antenna-1 Radiated Band Edge Measurements (80MHz BW).....	252
7.6.7	SISO Antenna-2 Radiated Band Edge Measurements (20MHz BW).....	254
7.6.8	SISO Antenna-2 Radiated Band Edge Measurements (40MHz BW).....	256
7.6.9	SISO Antenna-2 Radiated Band Edge Measurements (80MHz BW).....	258
7.6.10	MIMO Radiated Band Edge Measurements (20MHz BW).....	260
7.6.11	MIMO Radiated Band Edge Measurements (40MHz BW).....	262
7.6.12	MIMO Radiated Band Edge Measurements (80MHz BW).....	264
7.7	Radiated Spurious Emissions Measurements – Below 1GHz	266
8.0	CONCLUSION.....	270

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 2 of 270	



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	ANT1		ANT2		MIMO	
			Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1	20	5180 - 5240	59.429	17.74	57.016	17.56	59.888	17.77
2A		5260 - 5320	55.847	17.47	56.234	17.50	58.568	17.68
2C		5500 - 5720	52.360	17.19	56.885	17.55	59.949	17.78
3		5745 - 5825	61.235	17.87	61.518	17.89	60.582	17.82
1	40	5190 - 5230	46.026	16.63	45.814	16.61	49.456	16.94
2A		5270 - 5310	44.875	16.52	46.345	16.66	47.089	16.73
2C		5510 - 5710	44.978	16.53	44.361	16.47	48.500	16.86
3		5755 - 5795	49.431	16.94	49.317	16.93	48.373	16.85
1	80	5210	39.628	15.98	37.411	15.73	37.954	15.79
2A		5290	35.156	15.46	36.559	15.63	37.546	15.75
2C		5530 - 5690	39.628	15.98	35.727	15.53	37.376	15.73
3		5775	38.459	15.85	39.628	15.98	38.946	15.90

EUT Overview

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 3 of 270	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 4 of 270

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMG988U**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: 1763S, 0496M, 0275M, 0276M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (n71, n5, n66, n2, n41, n260, n261), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, ANT+, Wireless Power Transfer

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	120	5600	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11ax (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	118	5590	159	5795
				:	:		
				142	5710		

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 5 of 270	

Notes:

- 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Mode	Antenna	Bandwidth	Channel	Tone	Duty Cycle
		[MHz]			
802.11ax NII RU	1	20	36	26T	99.4
				52T	99.7
				106T	99.3
				242T	98.4
802.11ax NII RU	2	20	36	26T	99.5
				52T	99.7
				106T	99.3
				242T	98.4
802.11ax NII RU	MIMO CDD	20	36	26T	99.7
				52T	99.3
				106T	98.6
				242T	98.4
802.11ax NII RU	1	40	38	26T	99.4
				52T	99.7
				106T	99.3
				242T	98.2
				484T	98.3
802.11ax NII RU	2	40	38	26T	99.5
				52T	99.7
				106T	99.2
				242T	98.3
				484T	98.3
802.11ax NII RU	MIMO CDD	40	38	26T	99.7
				52T	99.4
				106T	98.5
				242T	98.3
				484T	98.3
802.11ax NII RU	1	80	42	26T	99.4
				52T	99.6
				106T	99.2
				242T	98.4
				484T	98.3
				996T	98.2
802.11ax NII RU	2	80	42	26T	99.4
				52T	99.7
				106T	99.2
				242T	98.3
				484T	98.3
				996T	98.2
802.11ax NII RU	MIMO CDD	80	42	26T	99.7
				52T	99.3
				106T	98.5
				242T	98.2
				484T	98.2
				996T	98.1

Table 2-4. Measured Duty Cycles

FCC ID: A3LSMG988U	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 6 of 270	

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		MIMO	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
5GHz	11ax (20MHz)	✓	✓	✓	✓	✓	✓
	11ax (40MHz)	✓	✓	✓	✓	✓	✓
	11ax (80MHz)	✓	✓	✓	✓	✓	✓

Table 2-5. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

3. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz (WLAN & BT) and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report. The BT + 5GHz case is not considered as worst case since the BT power is lower than the 2.4GHz WLAN power.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 7 of 270

Configuration 1: ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	1	36
Operating Frequency (MHz)	2412	5180
Data Rate (Mbps)	1	6
Mode	802.11b	802.11a

Table 2-6. Config-1 (ANT1 2.4GHz & ANT2 5GHz)

Configuration 2: ANT1 transmitting in 5GHz mode and ANT2 in 2.4GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	6	165
Operating Frequency (MHz)	2437	5825
Data Rate (Mbps)	1	6
Mode	802.11b	802.11a

Table 2-7. Config-2 (ANT1 5GHz & ANT2 2.4GHz)

Configuration 3: ANT1 and ANT2 both transmitting in 2.4GHz and 5GHz modes simultaneously

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	11	165
Operating Frequency (MHz)	2462	5825
Data Rate (Mbps)	6	6
Mode	802.11g	802.11a

Table 2-8. Config-3 (ANT1 MIMO & ANT2 MIMO)

2.3 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT placed on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 8 of 270	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 9 of 270	

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 10 of 270	

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 11 of 270

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-2	Conducted Cable Set (25GHz)	6/3/2019	Annual	6/3/2020	WL25-2
-	WL25-1	Conducted Cable Set (25GHz)	6/5/2019	Annual	6/5/2020	WL25-1
-	WL25-4	Conducted Cable Set (25GHz)	6/4/2019	Annual	6/4/2020	WL25-4
Agilent	N9030A	PXA Signal Analyzer (44GHz)	6/12/2019	Annual	6/12/2020	MY52350166
Agilent	N9020A	MXA Signal Analyzer	4/20/2019	Annual	4/20/2020	US46470561
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	6/7/2018	Triennial	6/7/2021	9203-2178
Emco	3160-09	Small Horn (18 - 26.5GHz)	8/9/2018	Biennial	8/9/2020	00135427
Emco	3160-10	Small Horn (26.5 - 40GHz)	8/9/2018	Biennial	8/9/2020	00130993
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	6/18/2018	Biennial	6/18/2020	114451
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	6/3/2019	Annual	6/3/2020	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	6/5/2019	Annual	6/5/2020	100342
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	5/6/2019	Annual	5/6/2020	103200
Seekonk	NC-100	Torque Wrench 8in-lb	5/9/2018	Biennial	5/9/2020	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 12 of 270

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMG988U
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	RSS-Gen [6.7]	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.407(e)	RSS-Gen [6.7]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED	PASS	Section 7.6
15.205, 15.407(b.1), (4), (5), (6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6, 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation," Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.1.
- 6) Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 13 of 270	



- 7) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
- 8) Only one RU index could be selected at a time so no contiguous or non-contiguous RU's were considered for testing.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 14 of 270

7.2 26dB Bandwidth Measurement – 802.11ax OFDMA

RSS-Gen [6.2]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

The 26dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.


FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 15 of 270

SISO Antenna-1 26 dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	26T	MCS0	18.84
	5200	40	ax (20MHz)	26T	MCS0	18.94
	5240	48	ax (20MHz)	26T	MCS0	18.98
	5190	38	ax (40MHz)	26T	MCS0	22.14
	5230	46	ax (40MHz)	26T	MCS0	21.91
	5210	42	ax (80MHz)	26T	MCS0	38.82
Band 2A	5260	52	ax (20MHz)	26T	MCS0	18.93
	5280	56	ax (20MHz)	26T	MCS0	19.37
	5320	64	ax (20MHz)	26T	MCS0	18.74
	5270	54	ax (40MHz)	26T	MCS0	22.63
	5310	62	ax (40MHz)	26T	MCS0	22.58
	5290	58	ax (80MHz)	26T	MCS0	38.97
Band 2C	5500	100	ax (20MHz)	26T	MCS0	18.83
	5600	120	ax (20MHz)	26T	MCS0	19.09
	5720	144	ax (20MHz)	26T	MCS0	19.19
	5510	102	ax (40MHz)	26T	MCS0	22.85
	5590	118	ax (40MHz)	26T	MCS0	22.05
	5710	142	ax (40MHz)	26T	MCS0	21.96
	5530	106	ax (80MHz)	26T	MCS0	39.25
	5610	122	ax (80MHz)	26T	MCS0	39.07
	5690	138	ax (80MHz)	26T	MCS0	39.04

Table 7-2. Conducted Bandwidth Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 16 of 270

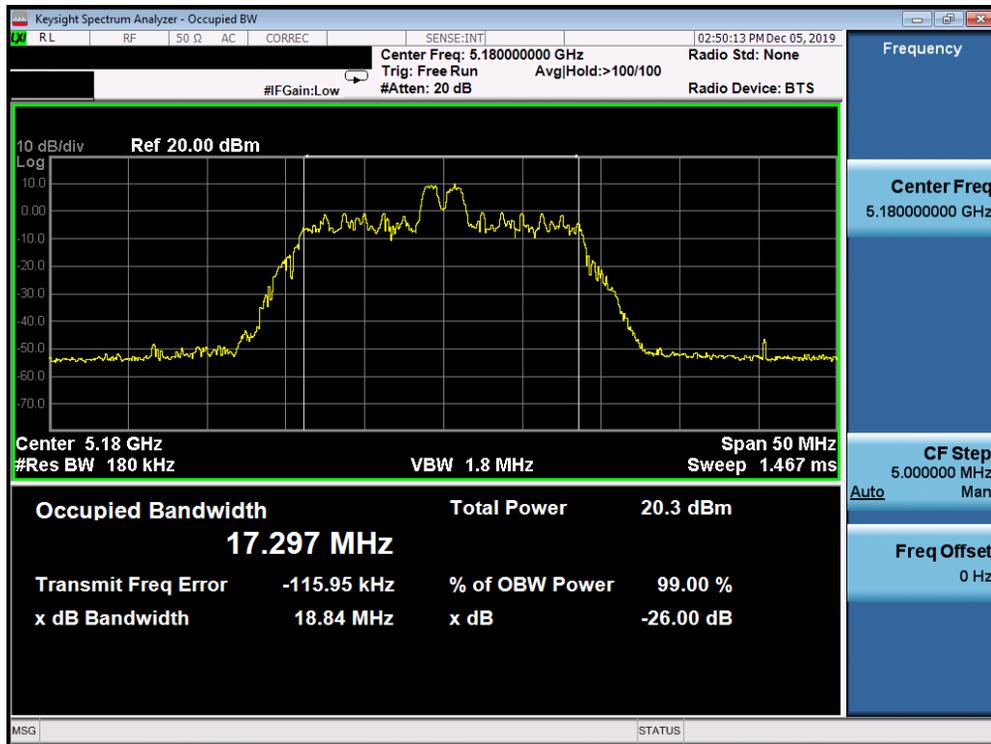


Plot 7-1. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 36)

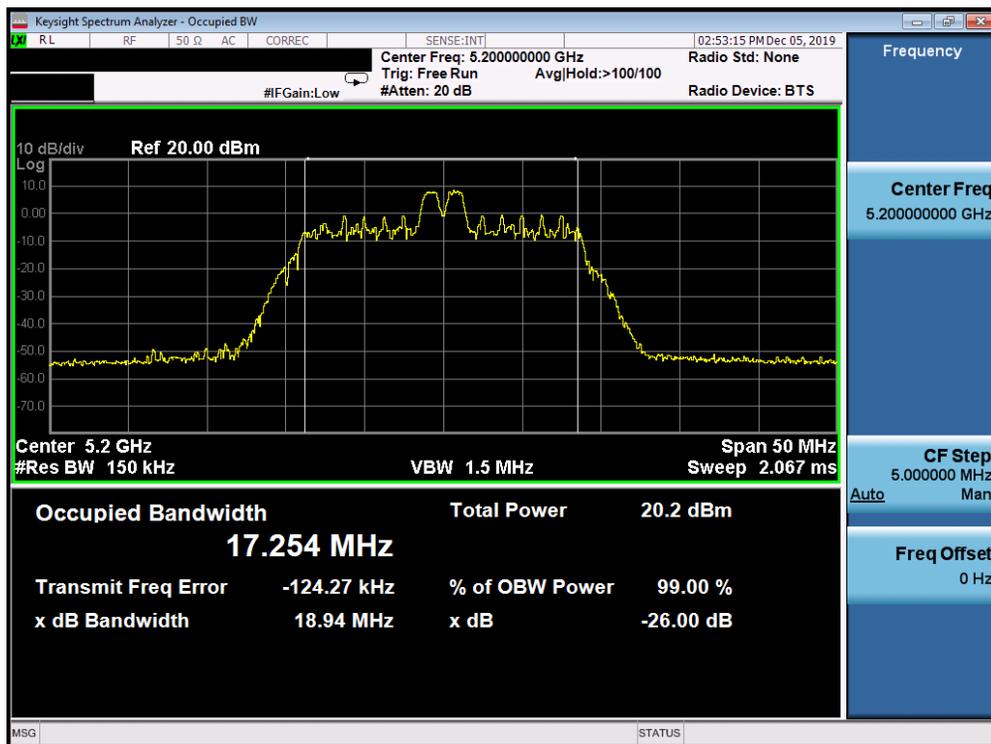


Plot 7-2. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 17 of 270

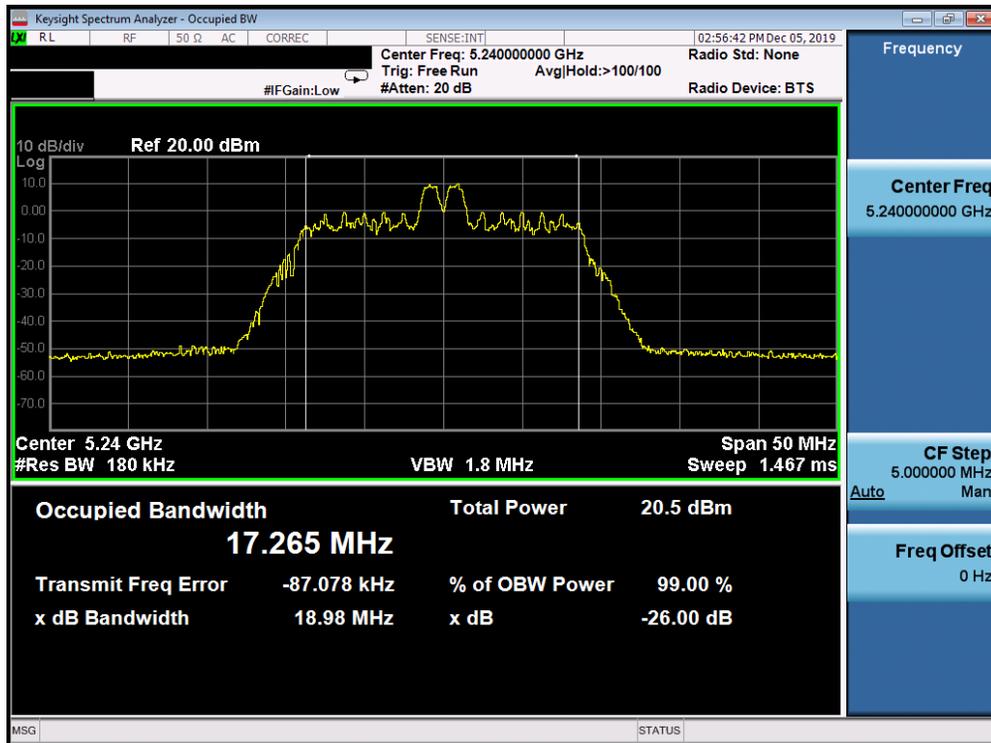


Plot 7-3. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 48)

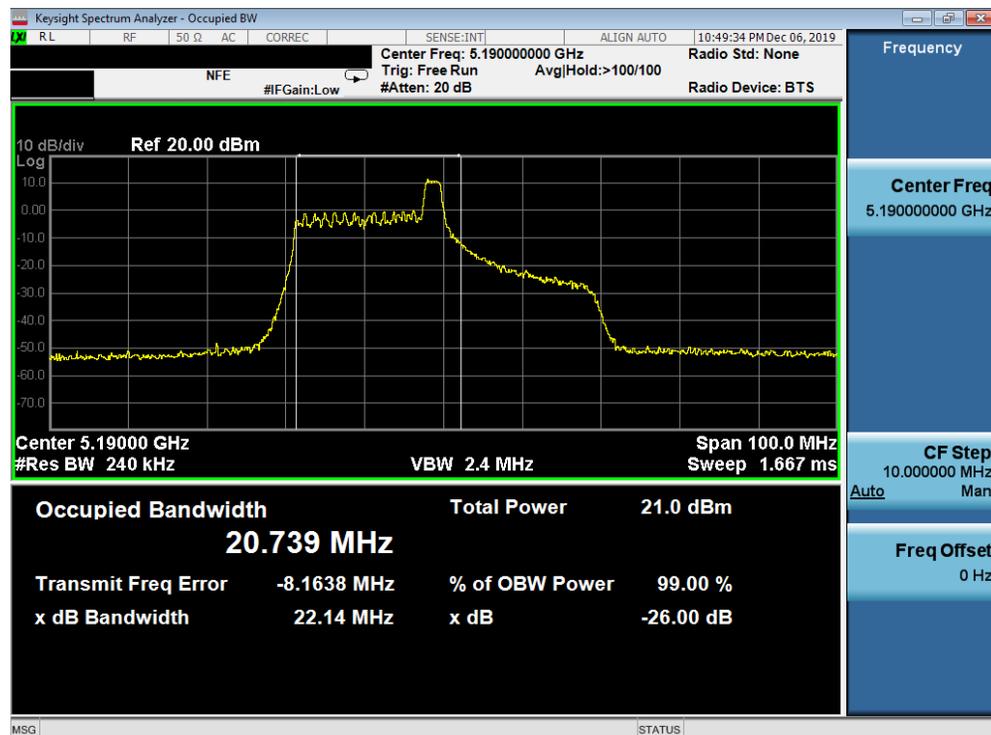


Plot 7-4. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 18 of 270

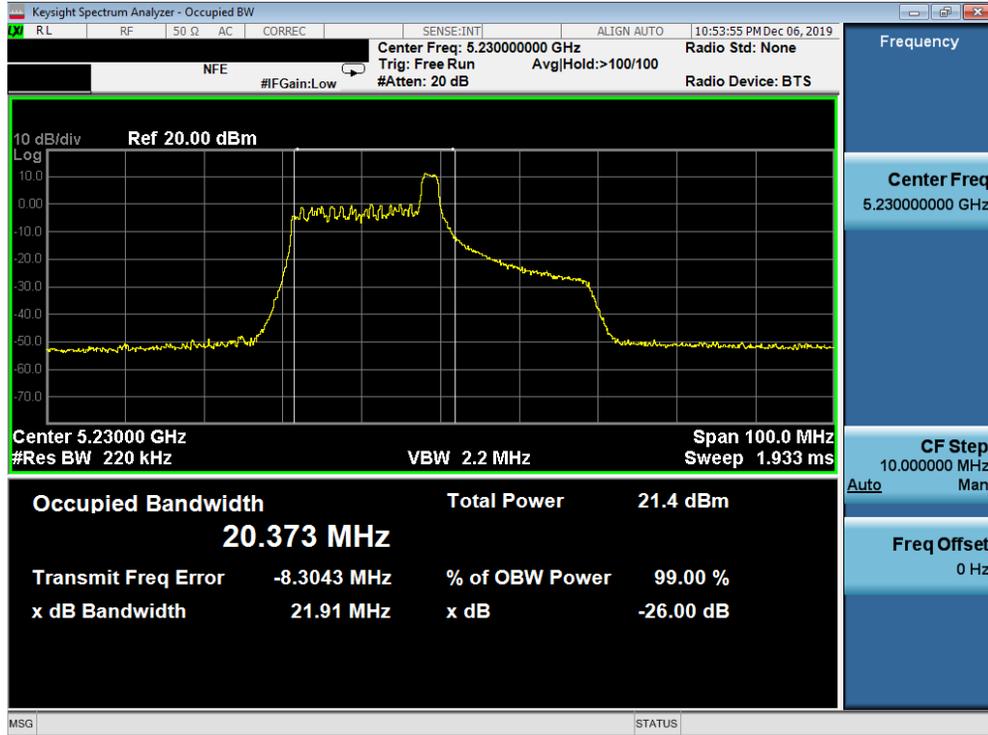


Plot 7-5. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 46)

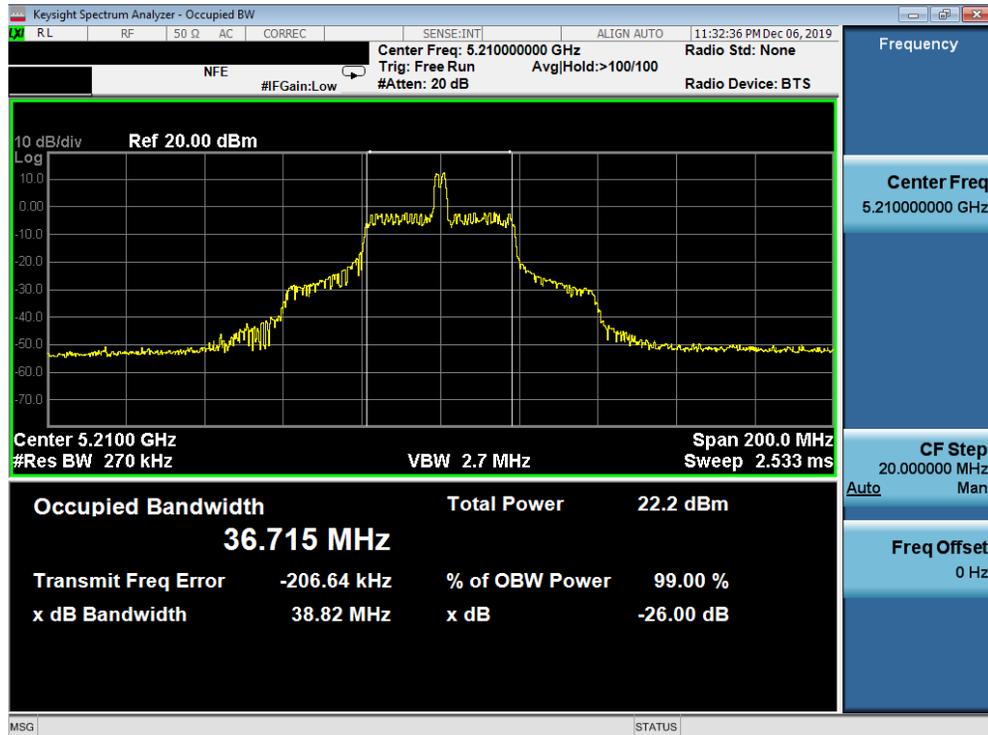


Plot 7-6. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 19 of 270

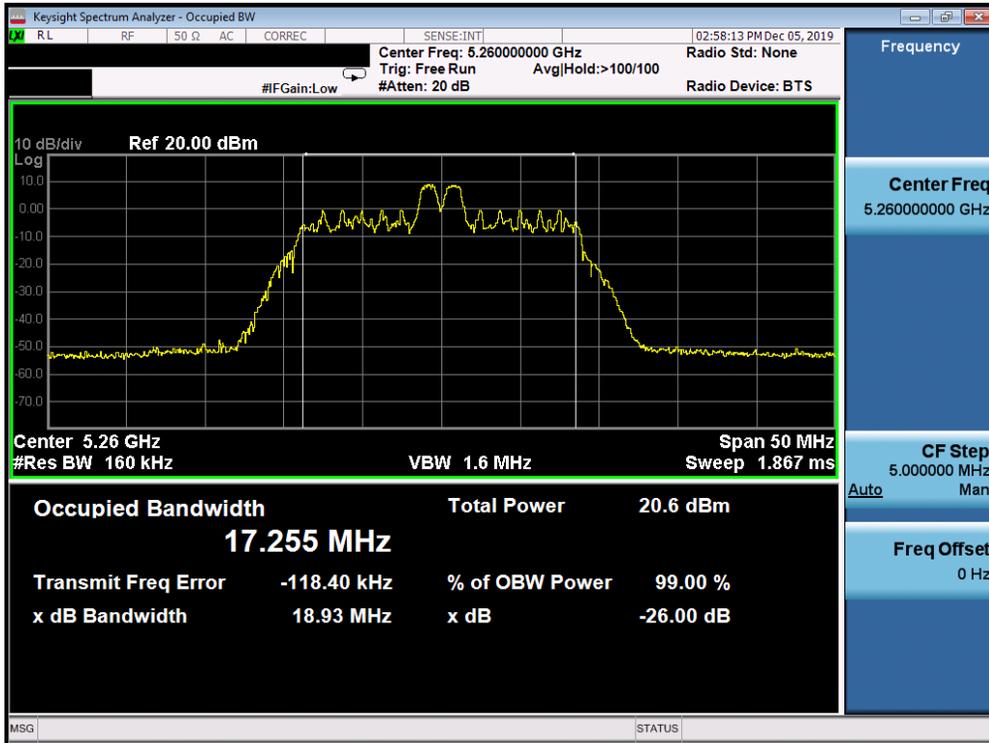


Plot 7-7. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 52)

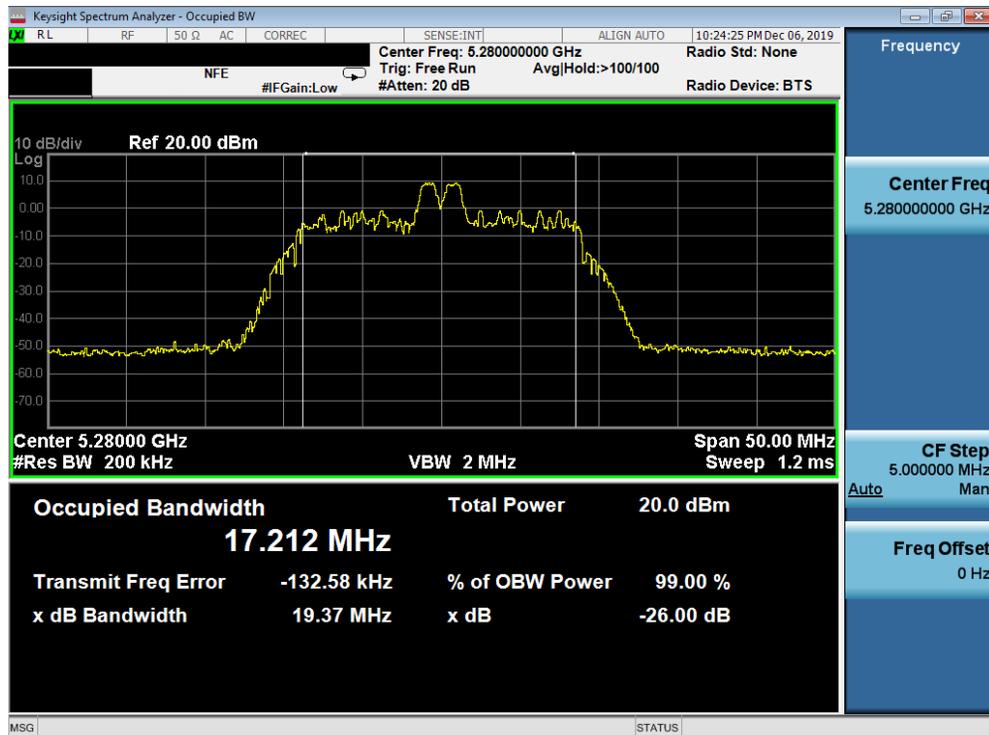


Plot 7-8. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 20 of 270

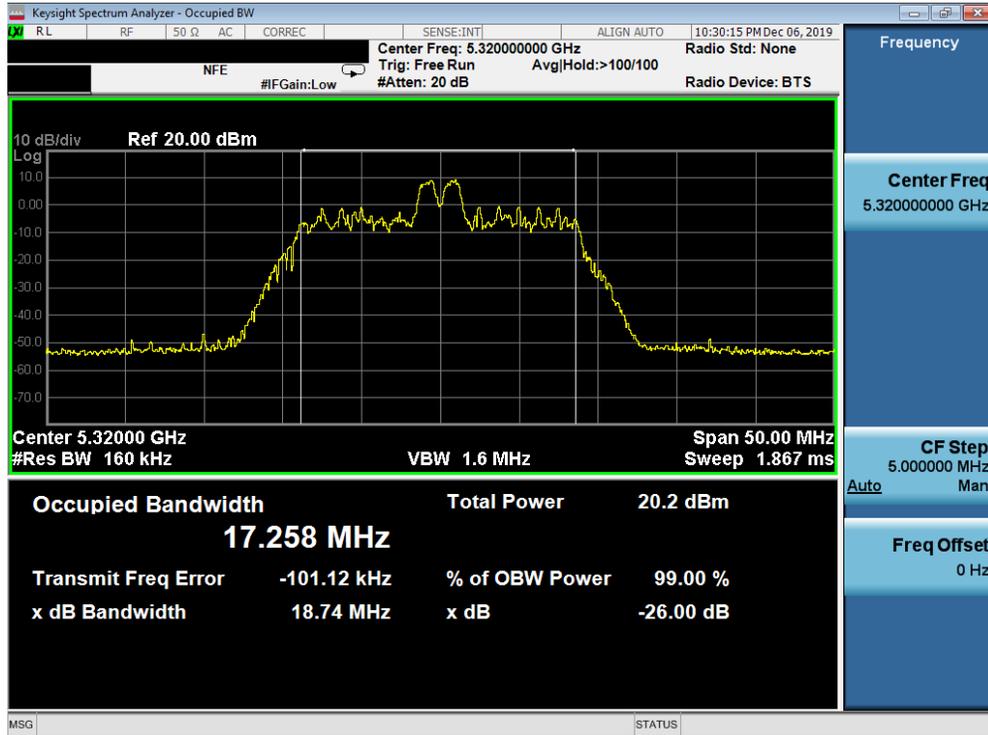


Plot 7-9. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 64)

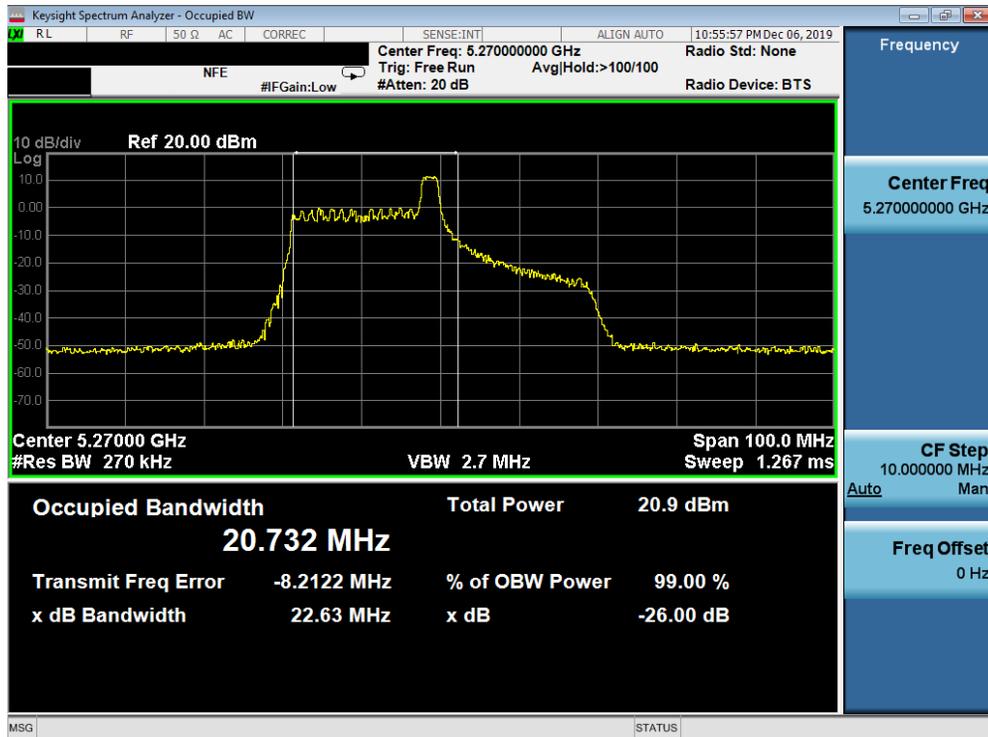


Plot 7-10. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 21 of 270

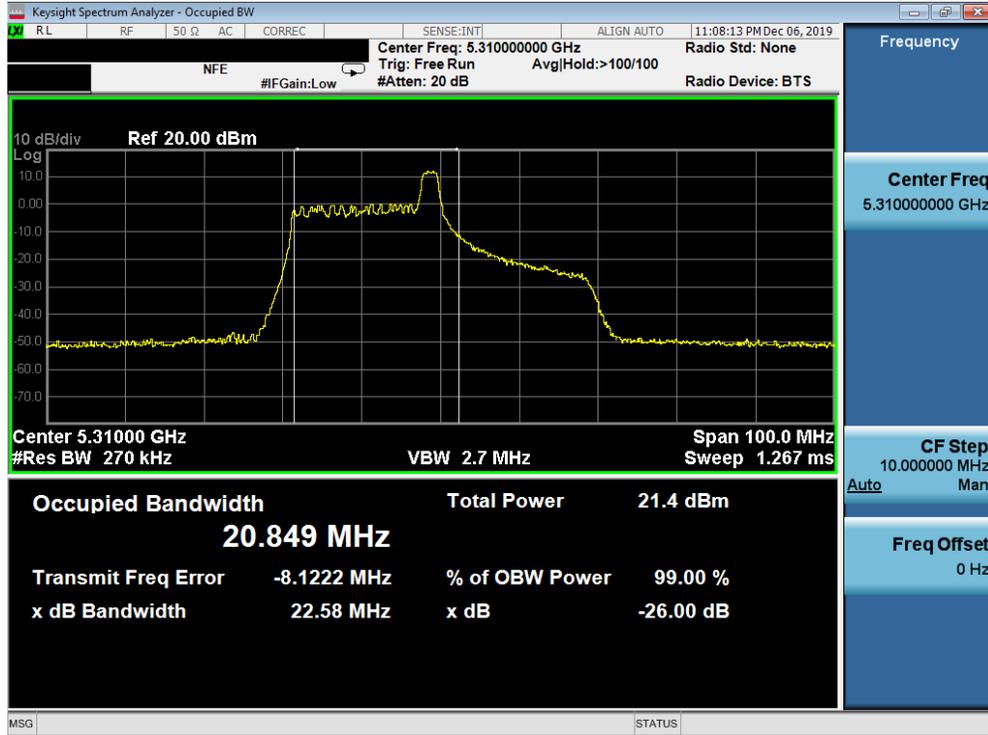


Plot 7-11. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 62)

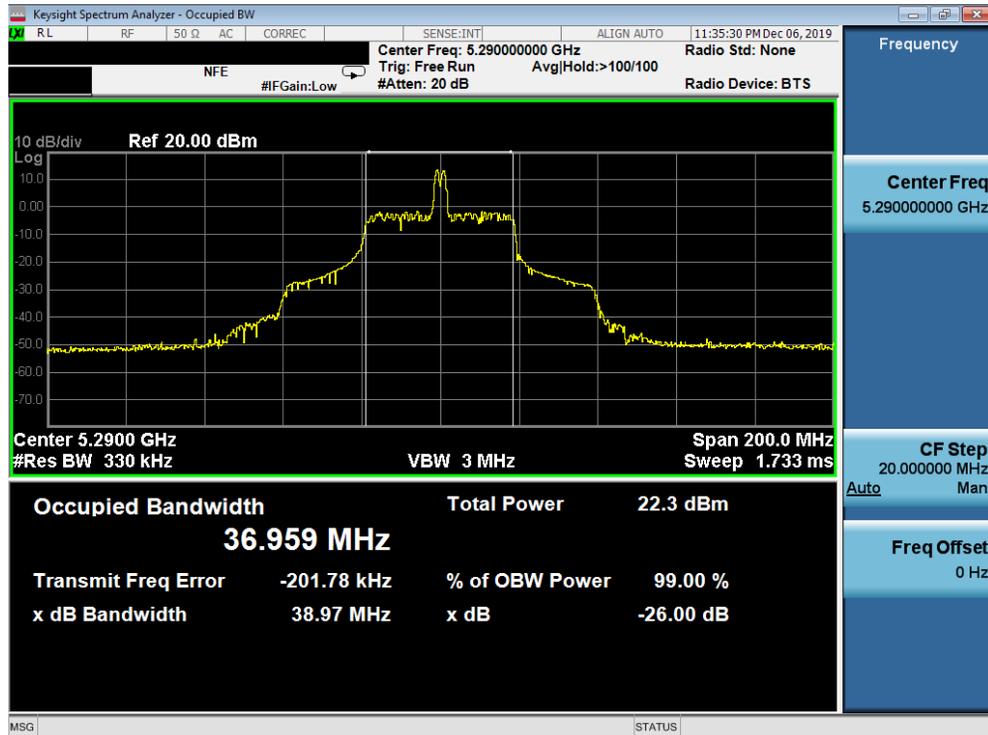


Plot 7-12. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 22 of 270

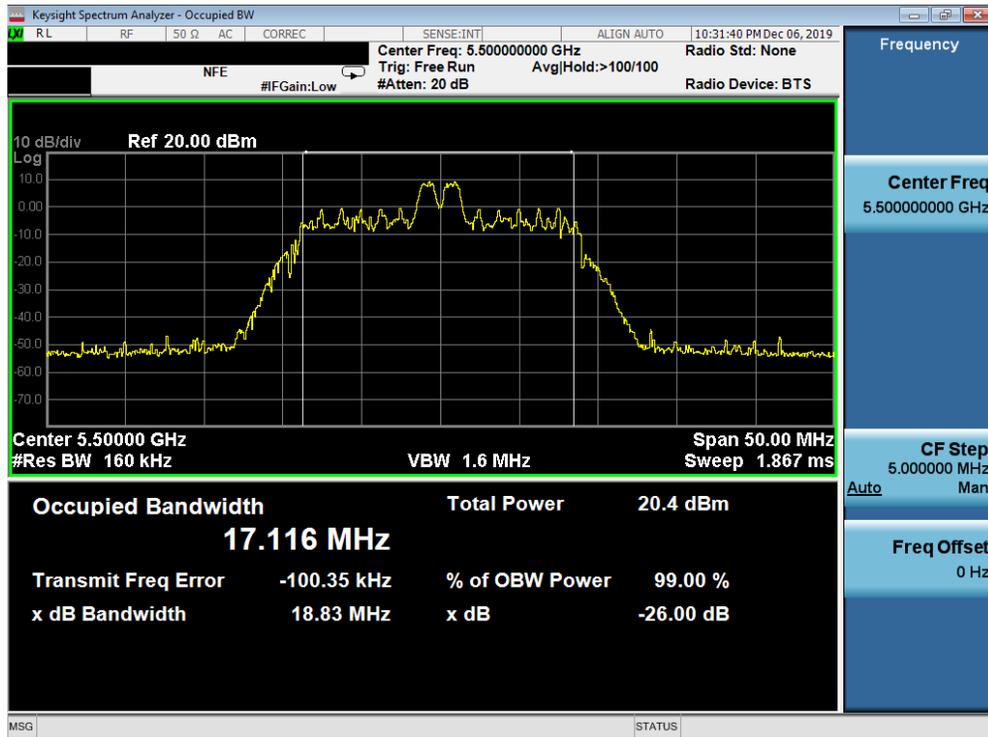


Plot 7-13. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 100)

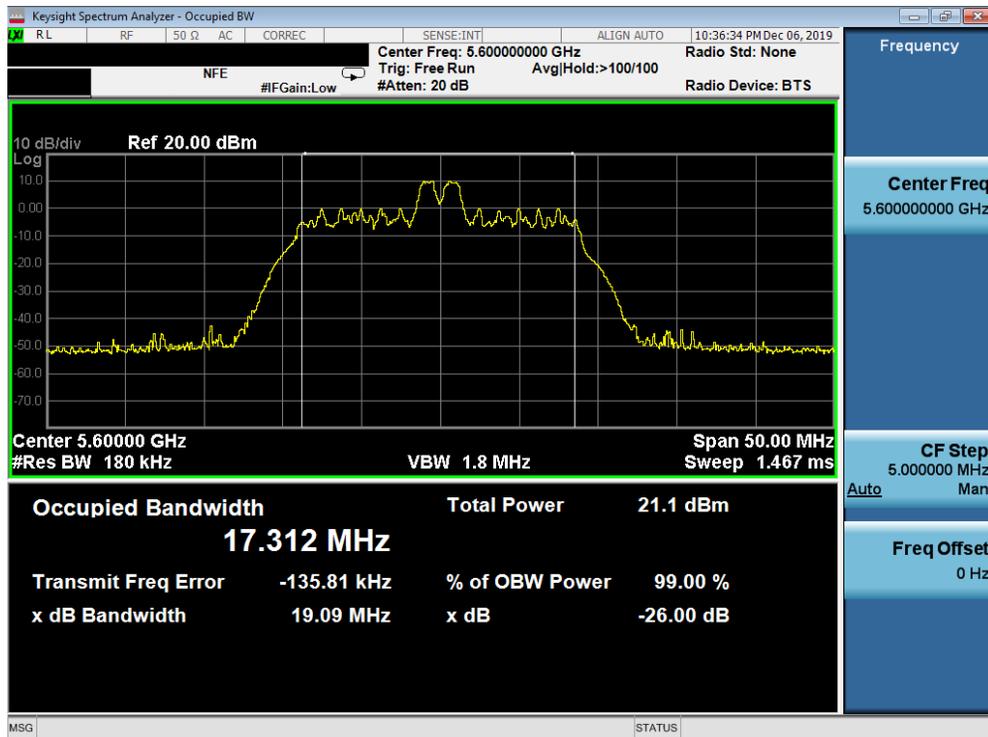


Plot 7-14. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 23 of 270

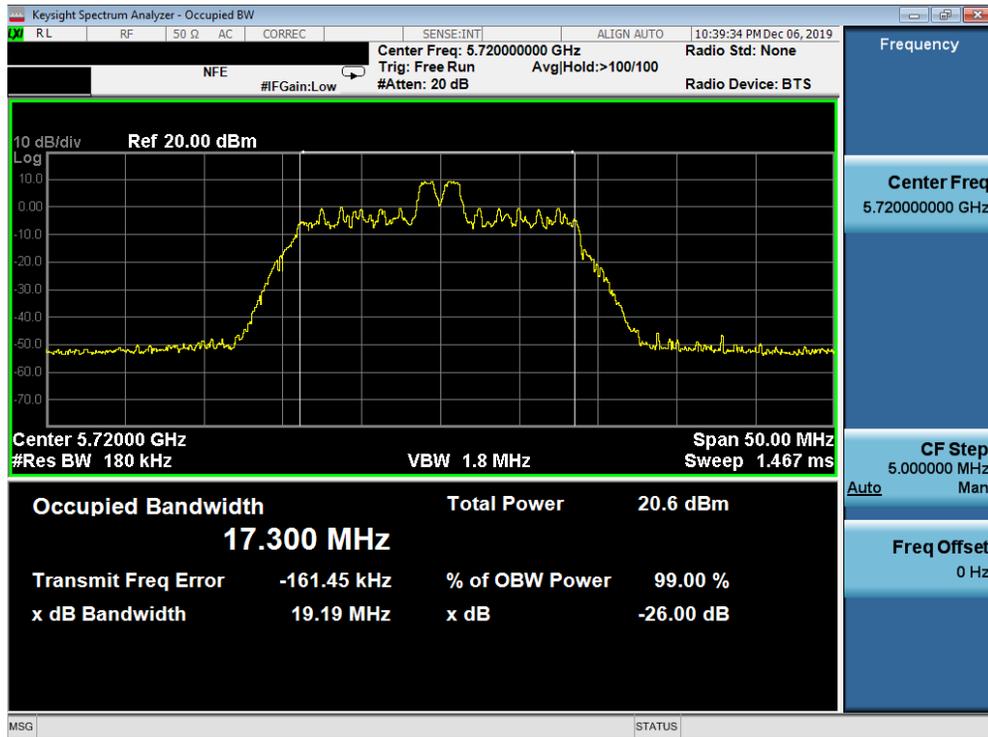

Plot 7-15. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 144)

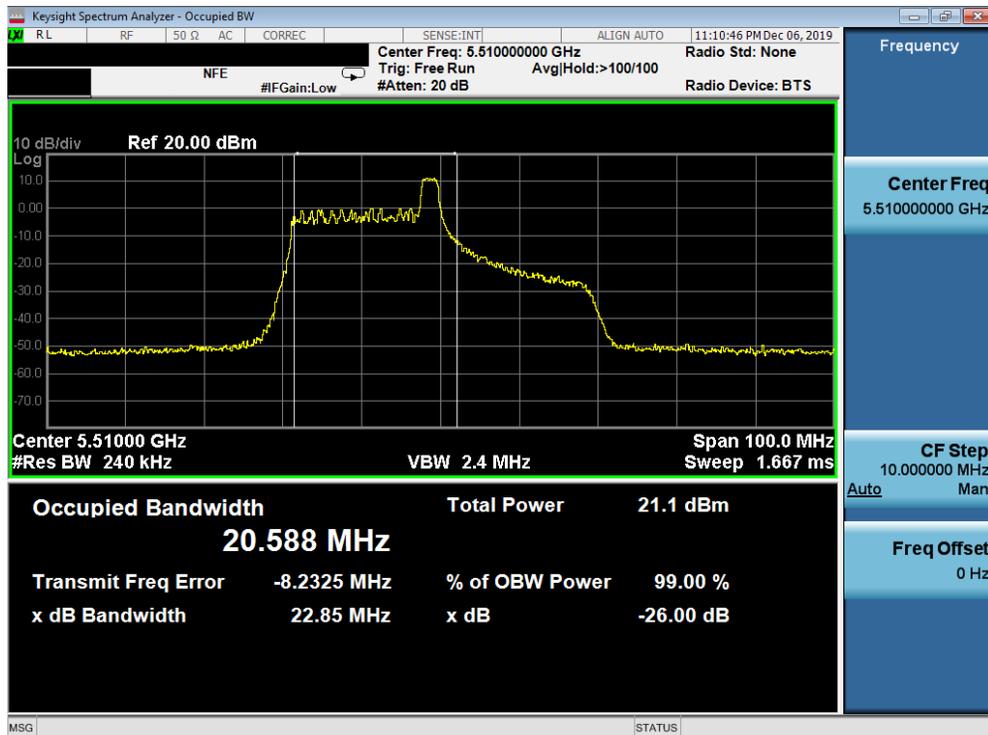


Plot 7-16. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 24 of 270




Plot 7-17. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

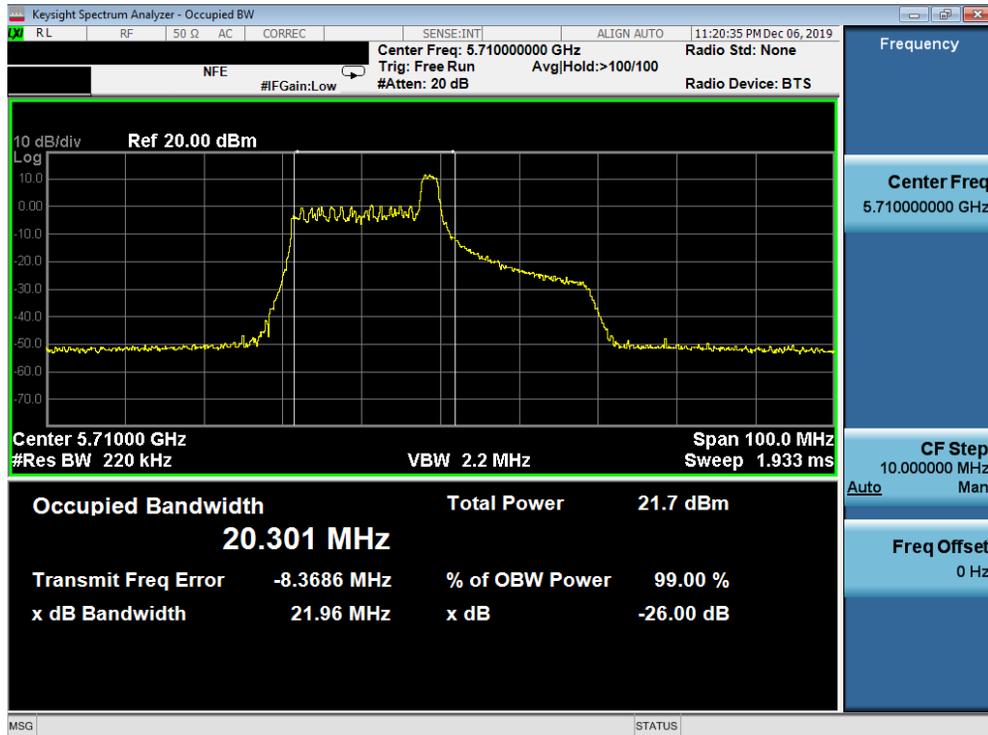


Plot 7-18. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 25 of 270

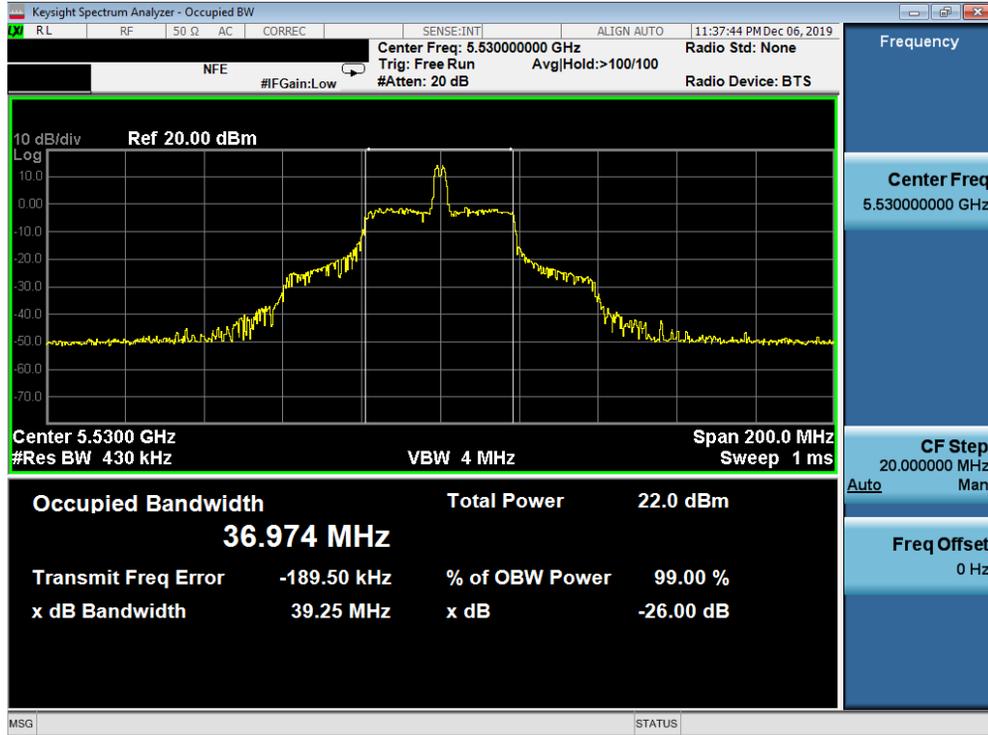


Plot 7-19. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 106)

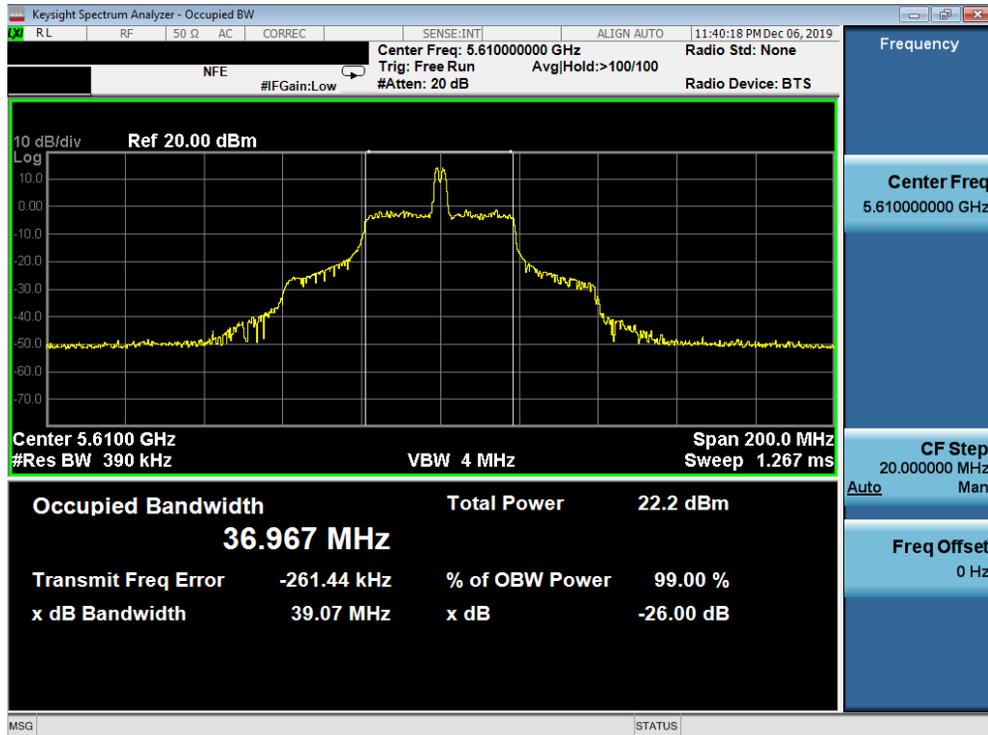

Plot 7-20. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 26 of 270

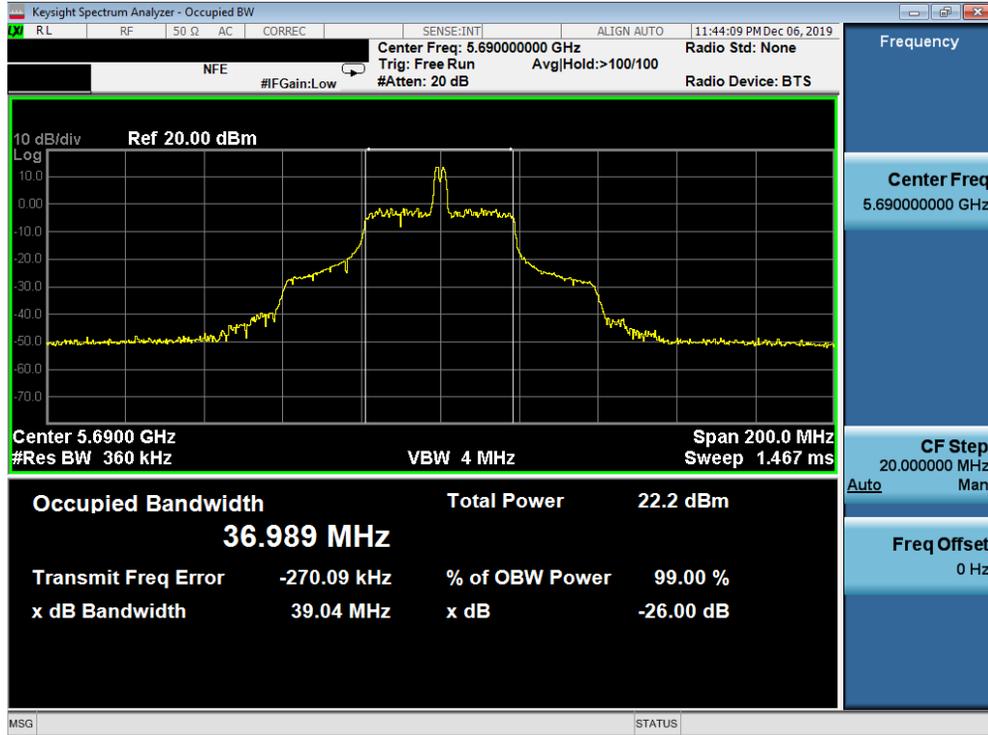

Plot 7-21. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 138)


FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 27 of 270

SISO Antenna-2 26dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	26T	MCS0	18.74
	5200	40	ax (20MHz)	26T	MCS0	19.01
	5240	48	ax (20MHz)	26T	MCS0	19.03
	5190	38	ax (40MHz)	26T	MCS0	22.45
	5230	46	ax (40MHz)	26T	MCS0	22.19
	5210	42	ax (80MHz)	26T	MCS0	38.95
Band 2A	5260	52	ax (20MHz)	26T	MCS0	19.11
	5280	56	ax (20MHz)	26T	MCS0	18.81
	5320	64	ax (20MHz)	26T	MCS0	19.00
	5270	54	ax (40MHz)	26T	MCS0	21.98
	5310	62	ax (40MHz)	26T	MCS0	22.50
	5290	58	ax (80MHz)	26T	MCS0	39.06
Band 2C	5500	100	ax (20MHz)	26T	MCS0	19.01
	5600	120	ax (20MHz)	26T	MCS0	18.69
	5720	144	ax (20MHz)	26T	MCS0	19.08
	5510	102	ax (40MHz)	26T	MCS0	22.37
	5590	118	ax (40MHz)	26T	MCS0	21.20
	5710	142	ax (40MHz)	26T	MCS0	22.48
	5530	106	ax (80MHz)	26T	MCS0	39.11
	5610	122	ax (80MHz)	26T	MCS0	39.45
	5690	138	ax (80MHz)	26T	MCS0	39.07

Table 7-3. Conducted Bandwidth Measurements SISO ANT2 (26 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 28 of 270

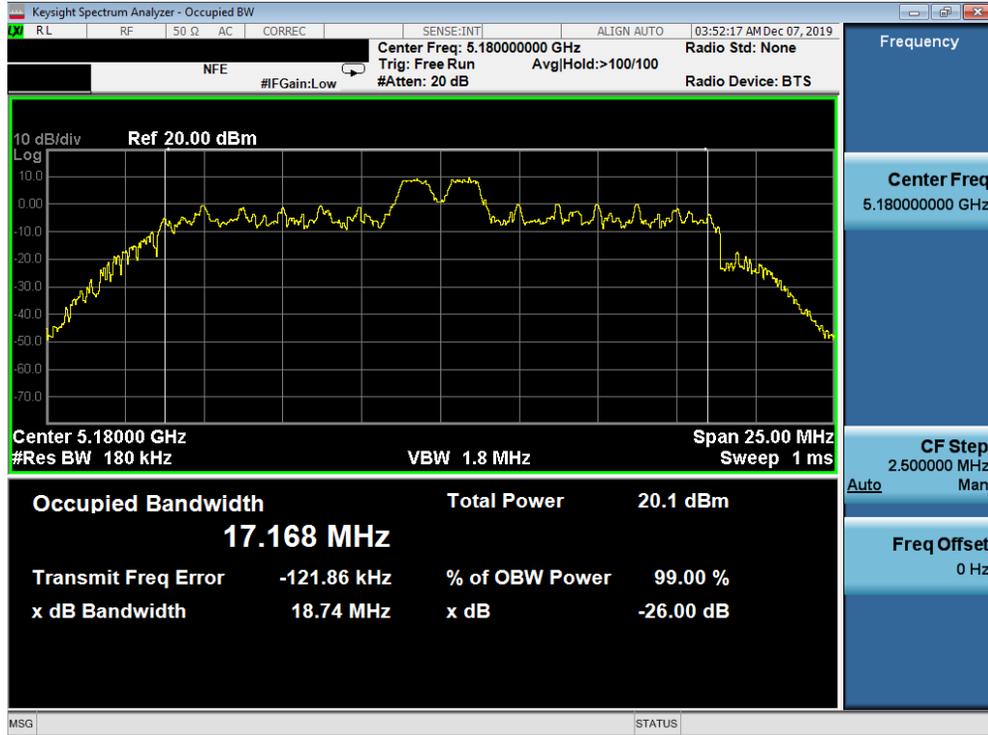


Plot 7-22. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 36)

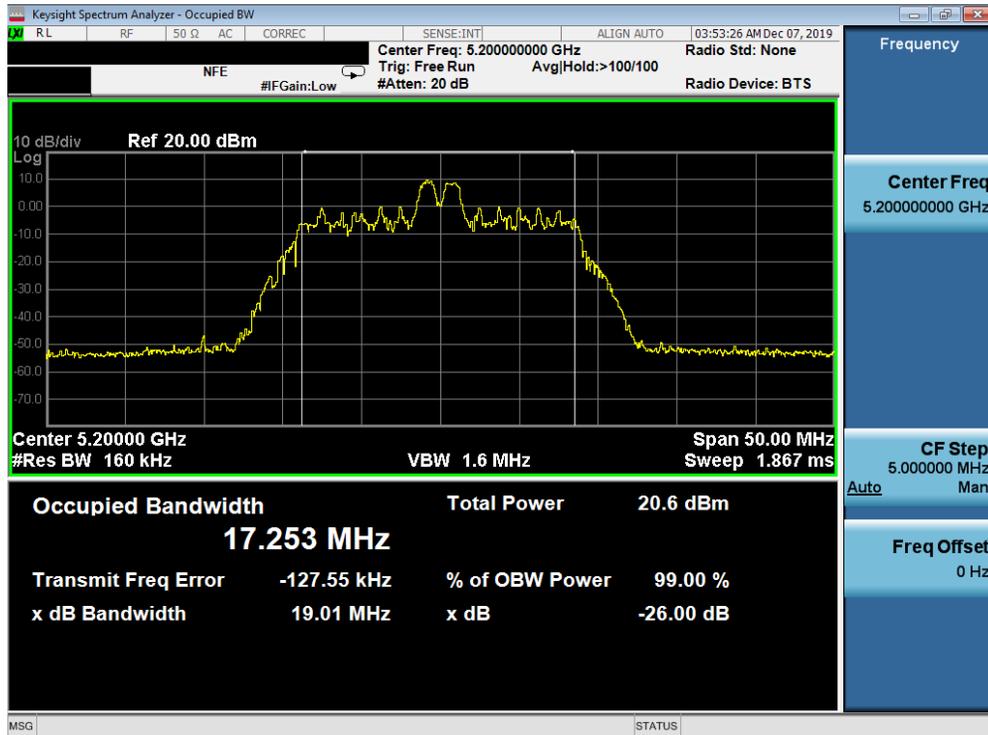

Plot 7-23. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 29 of 270

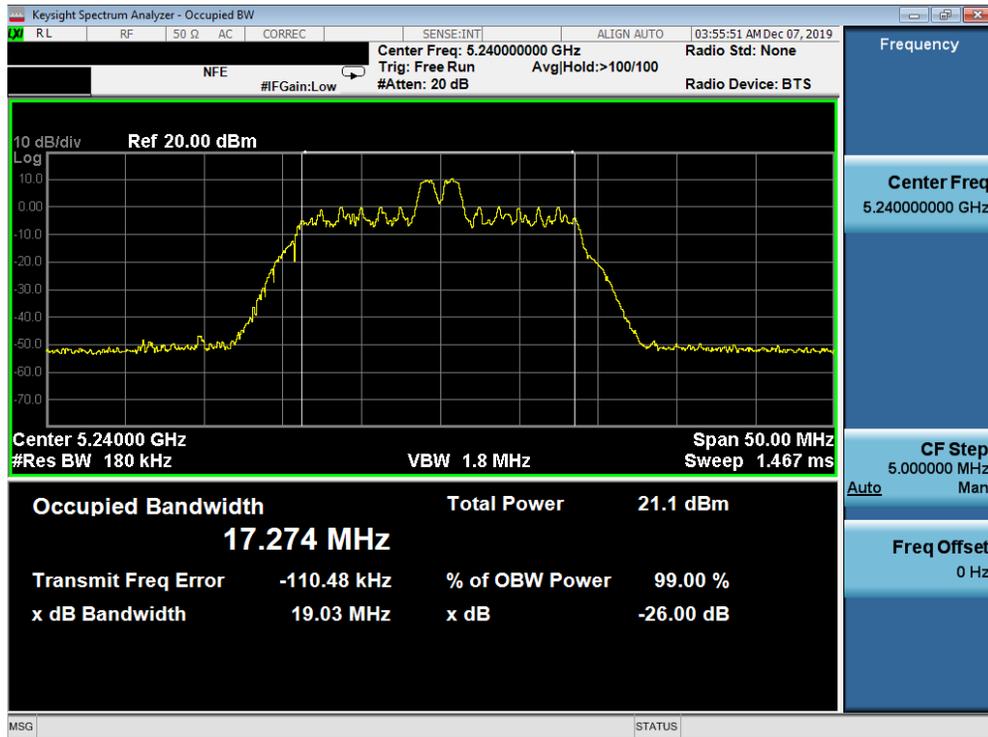


Plot 7-24. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 48)




Plot 7-25. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 30 of 270

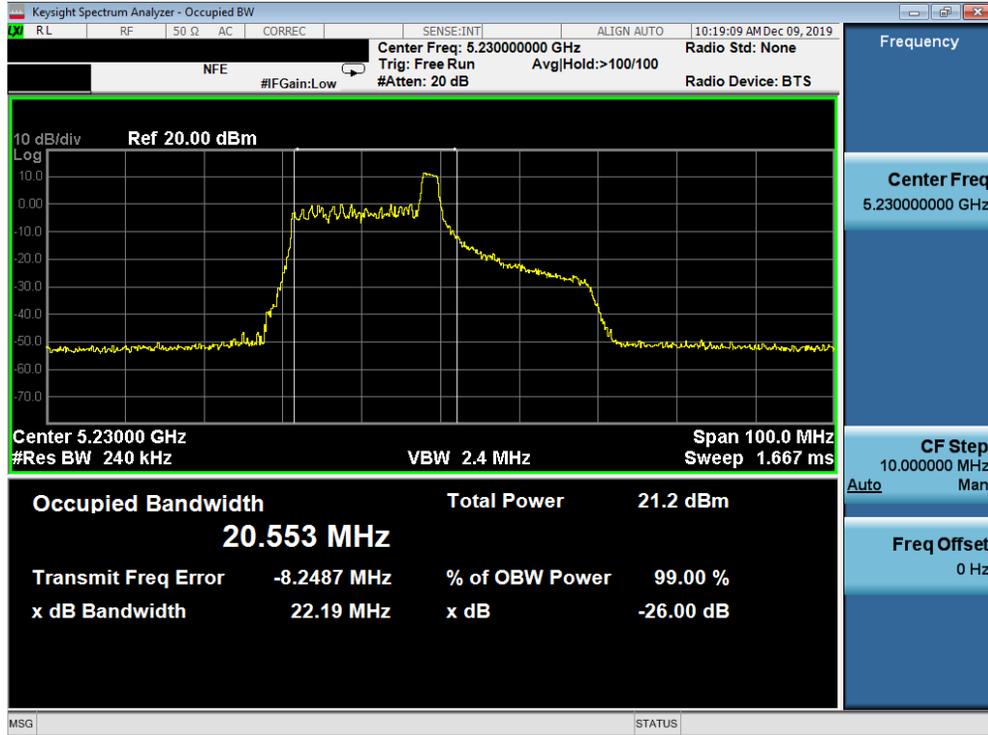


Plot 7-26. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 46)

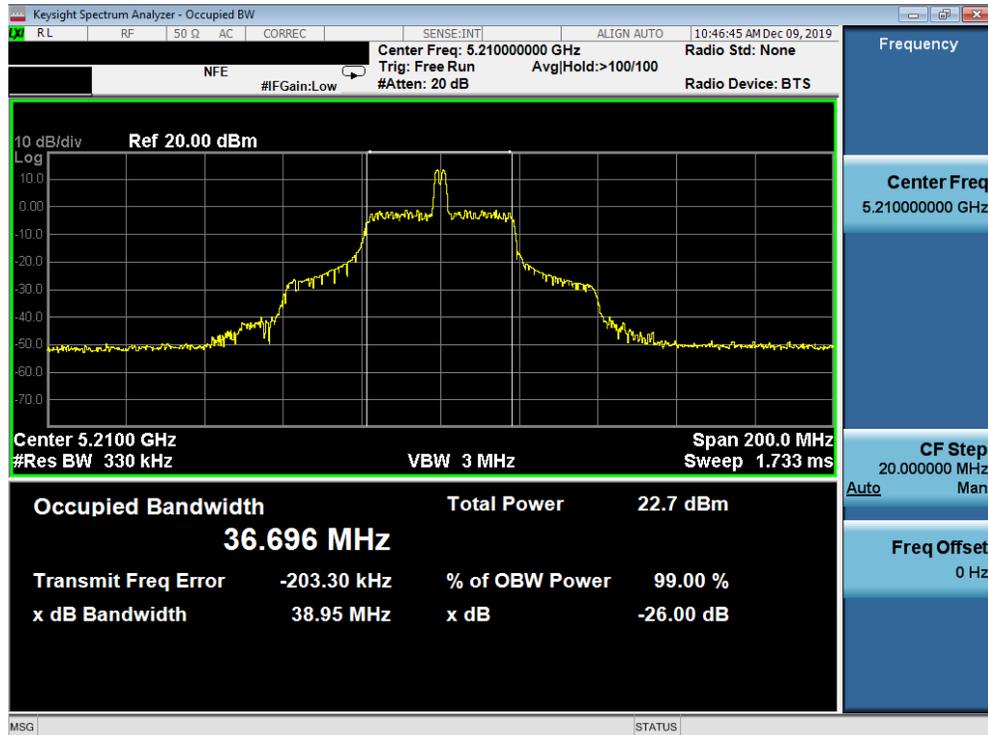


Plot 7-27. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 31 of 270

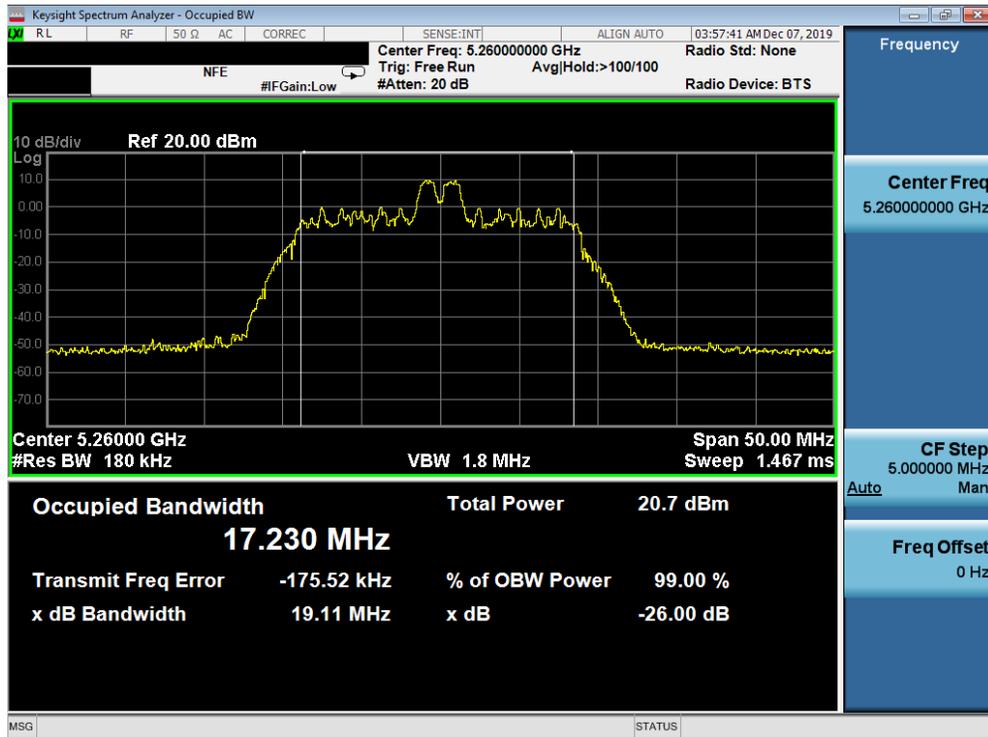


Plot 7-28. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 52)

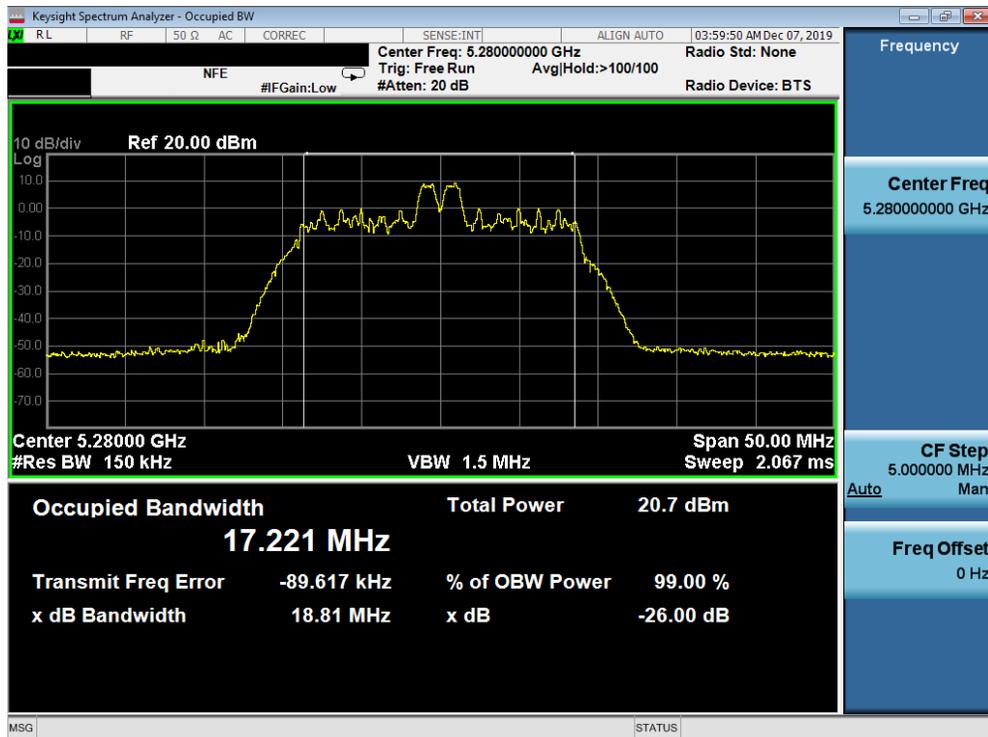


Plot 7-29. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 32 of 270

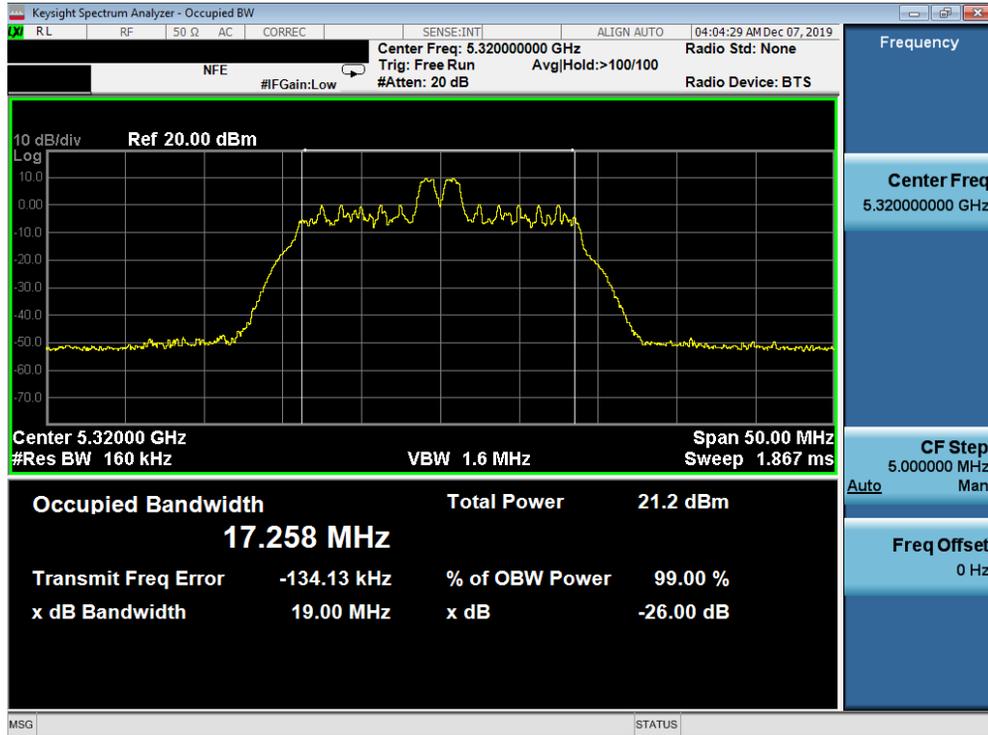

Plot 7-30. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 64)

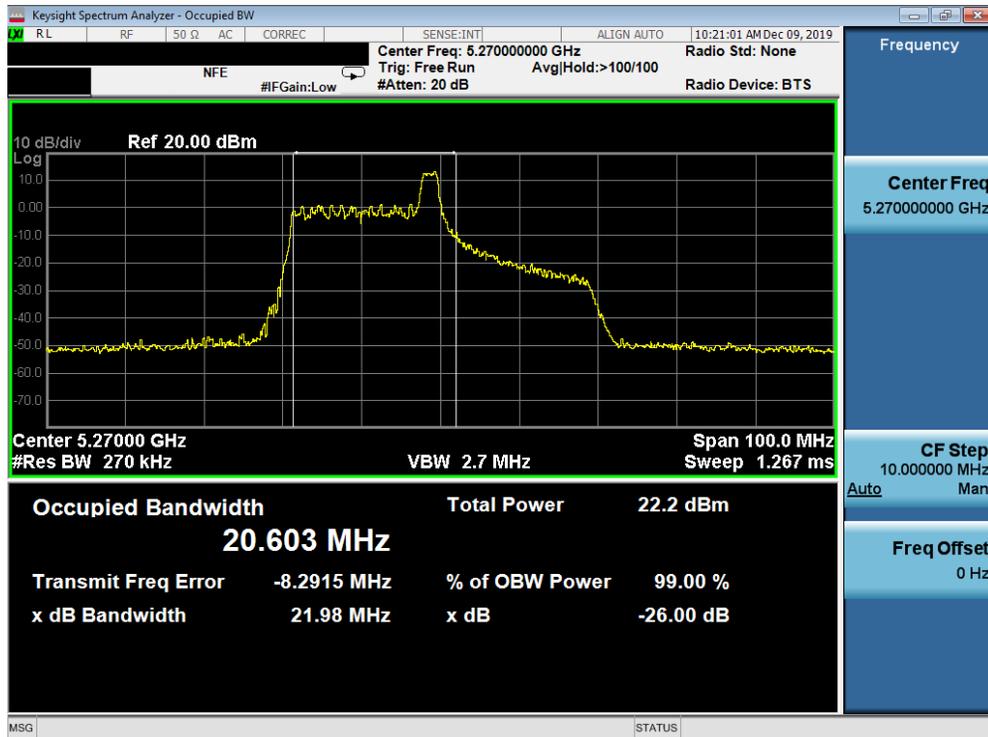


Plot 7-31. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 33 of 270




Plot 7-32. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 62)

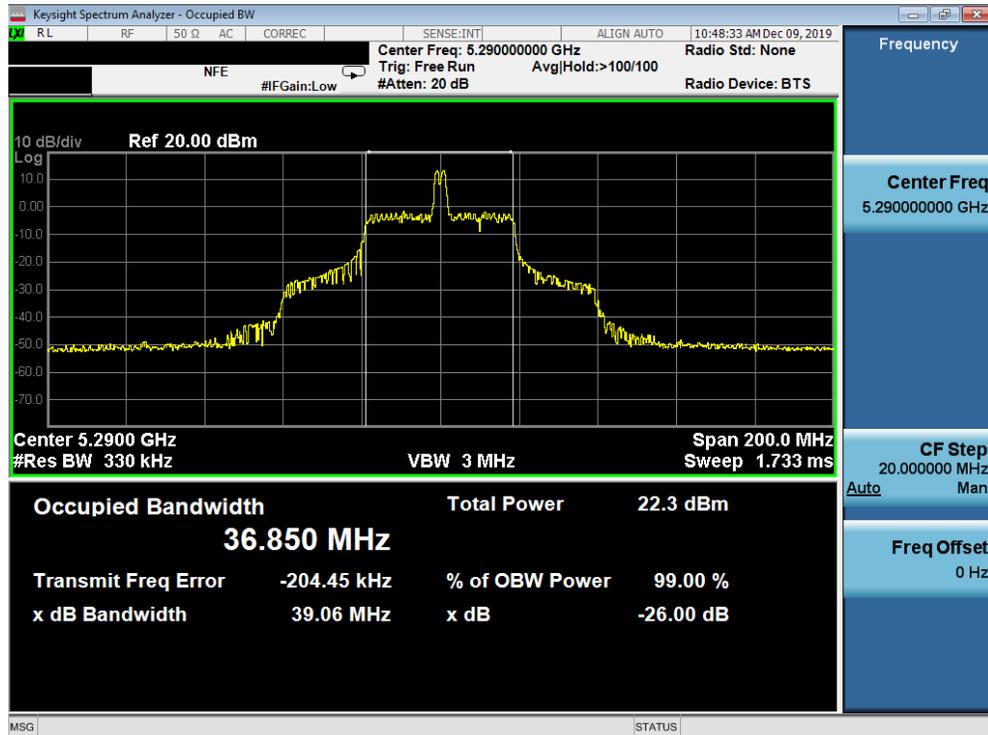


Plot 7-33. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 34 of 270

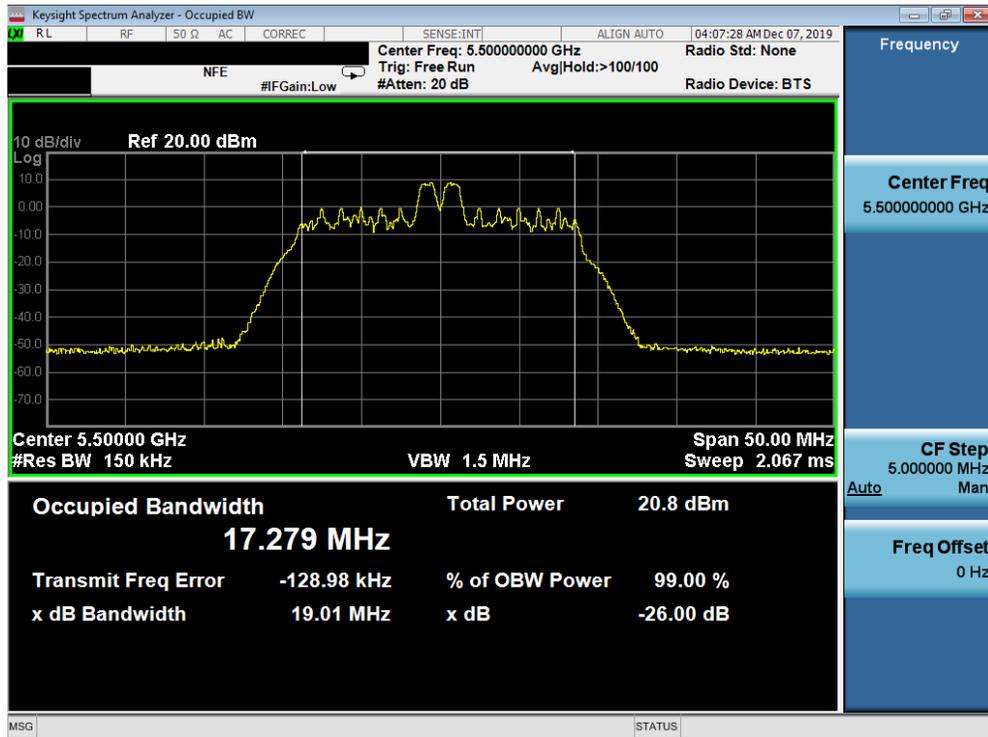


Plot 7-34. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 100)

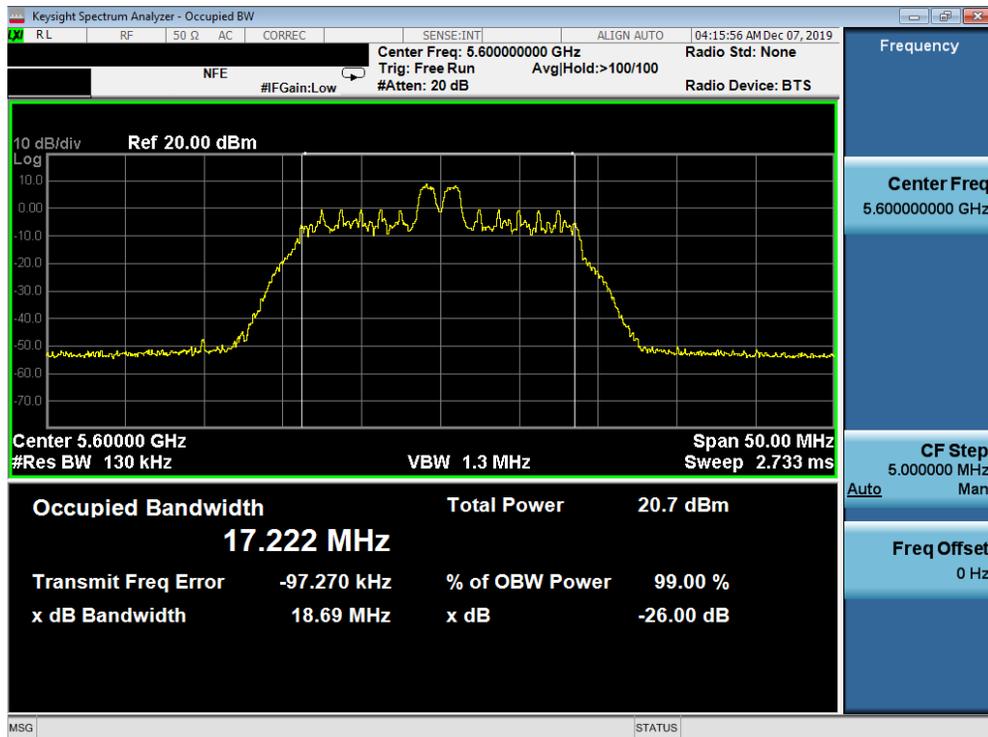


Plot 7-35. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 35 of 270

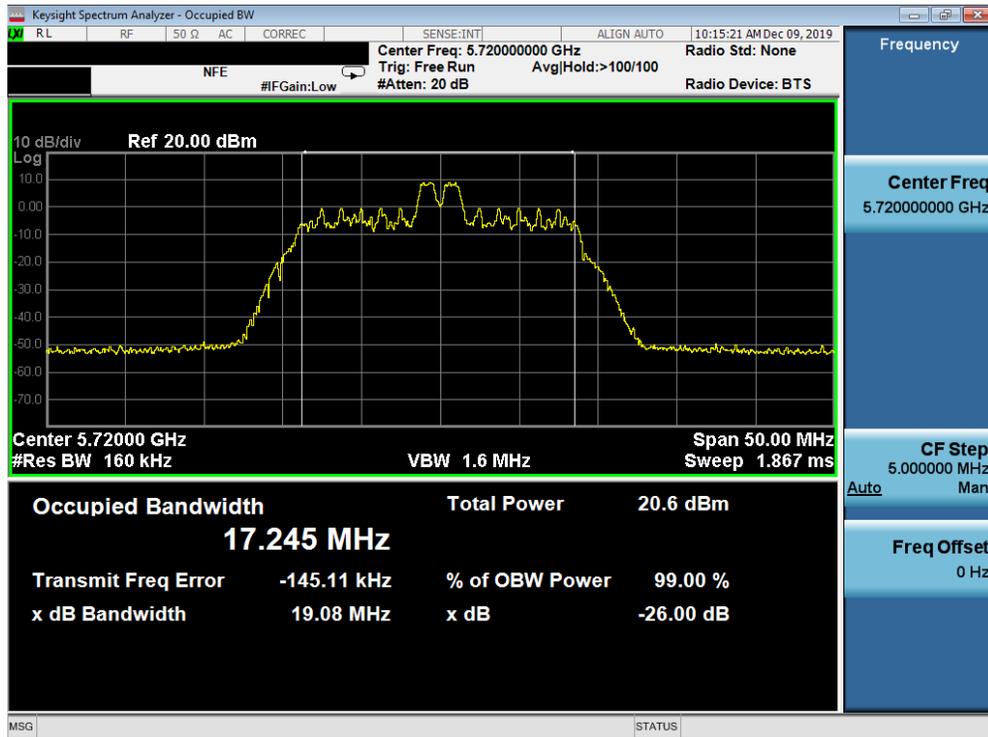


Plot 7-36. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 144)

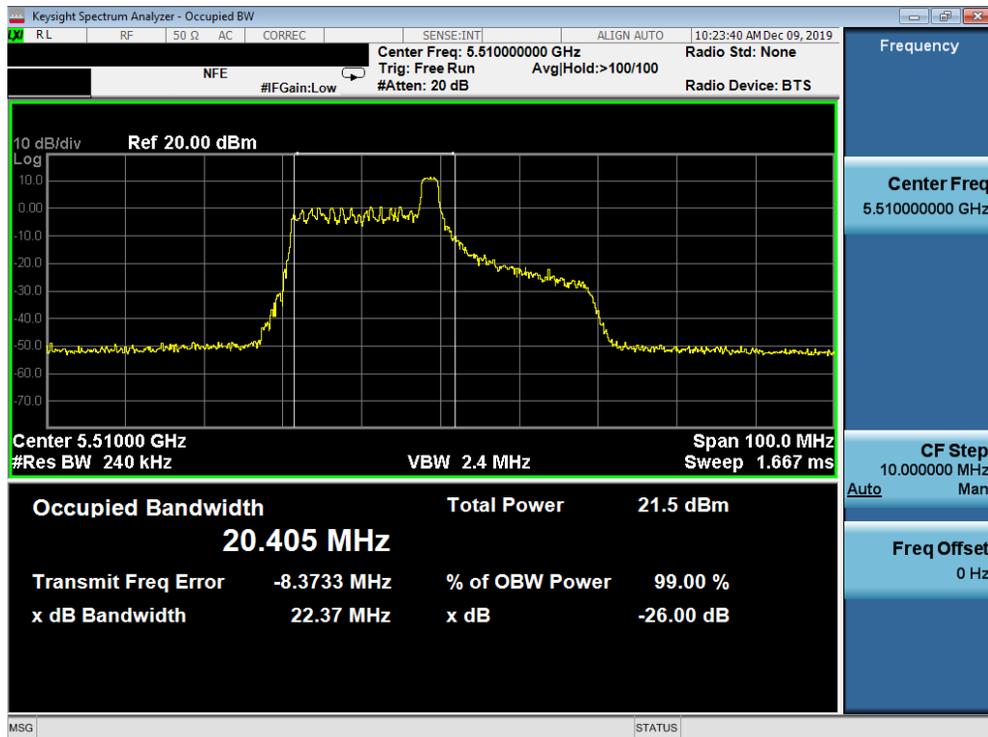


Plot 7-37. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 36 of 270

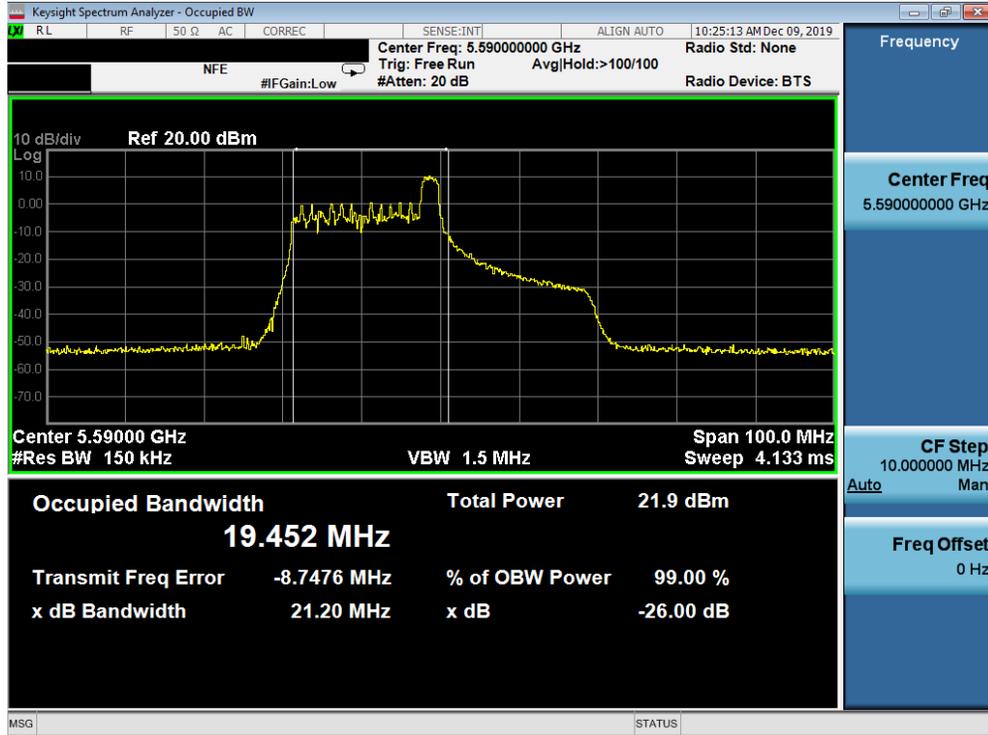


Plot 7-38. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

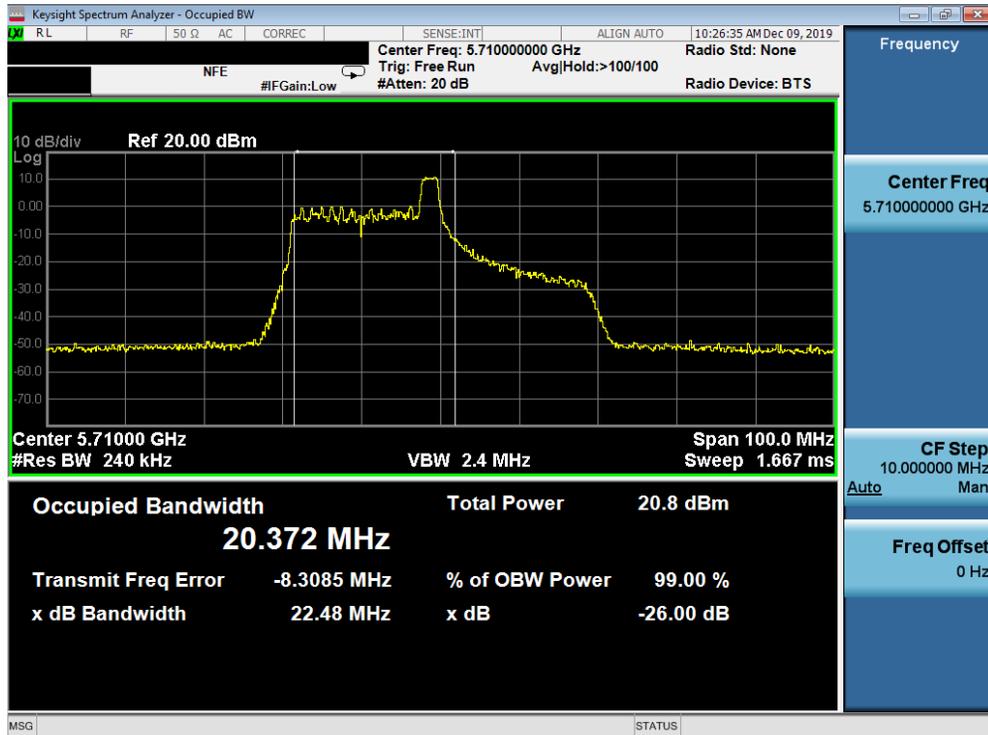


Plot 7-39. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 37 of 270

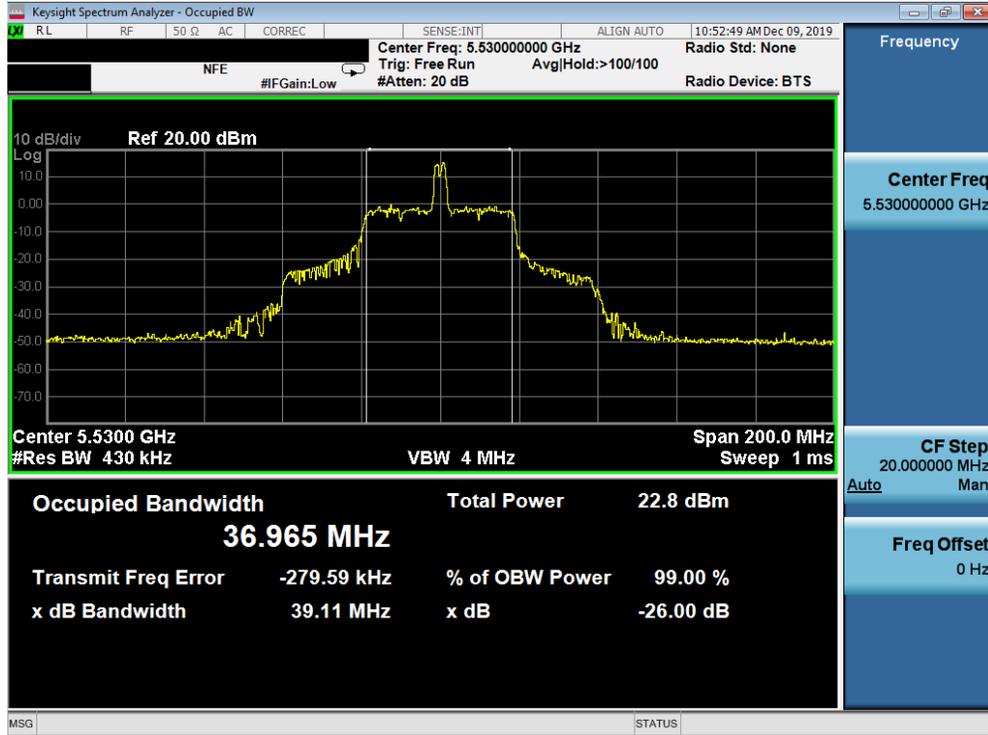


Plot 7-40. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 106)

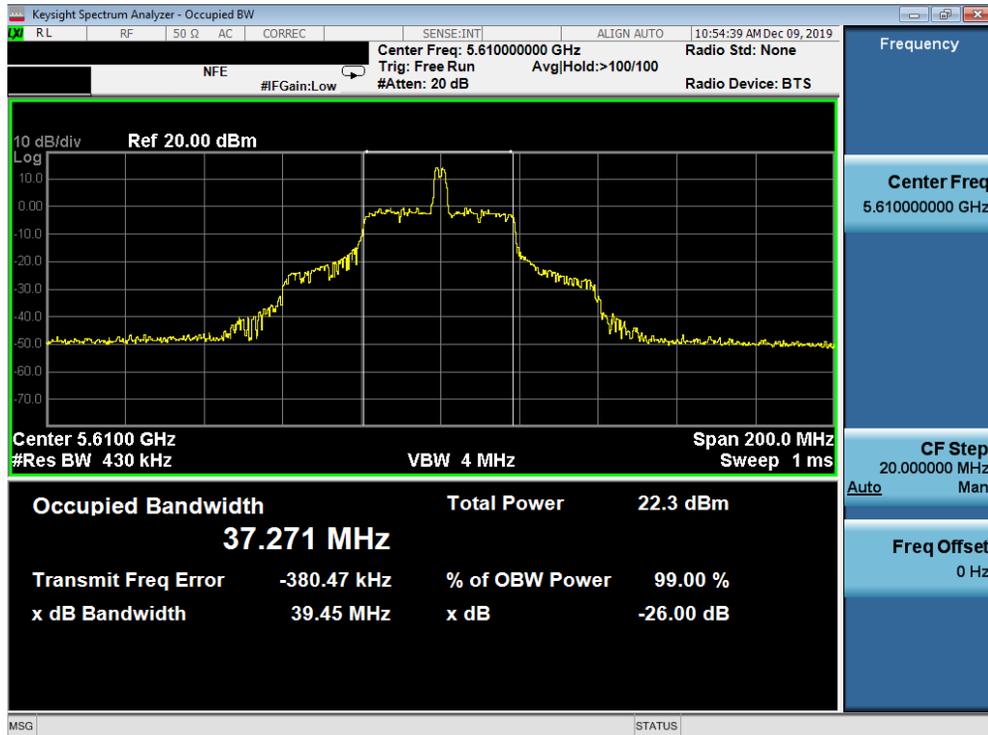

Plot 7-41. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 38 of 270

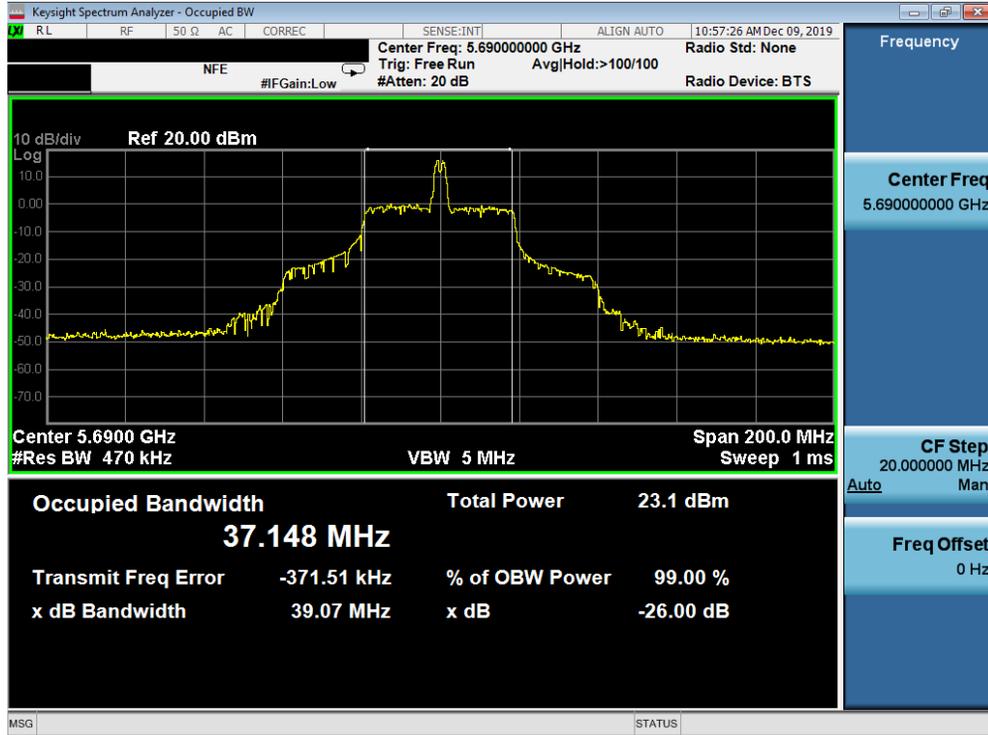

Plot 7-42. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 39 of 270

7.3 6dB Bandwidth Measurement – 802.11ax OFDMA §15.407 (e); RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be \geq 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


The 6dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 40 of 270

SISO Antenna-1 6 dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	ax (20MHz)	26T	MCS0	2.67
	5785	157	ax (20MHz)	26T	MCS0	2.71
	5825	165	ax (20MHz)	26T	MCS0	2.72
	5755	151	ax (40MHz)	26T	MCS0	2.18
	5795	159	ax (40MHz)	26T	MCS0	2.16
	5775	155	ax (80MHz)	26T	MCS0	2.88

Table 7-4. Conducted Bandwidth Measurements SISO ANT1 (26 Tones)

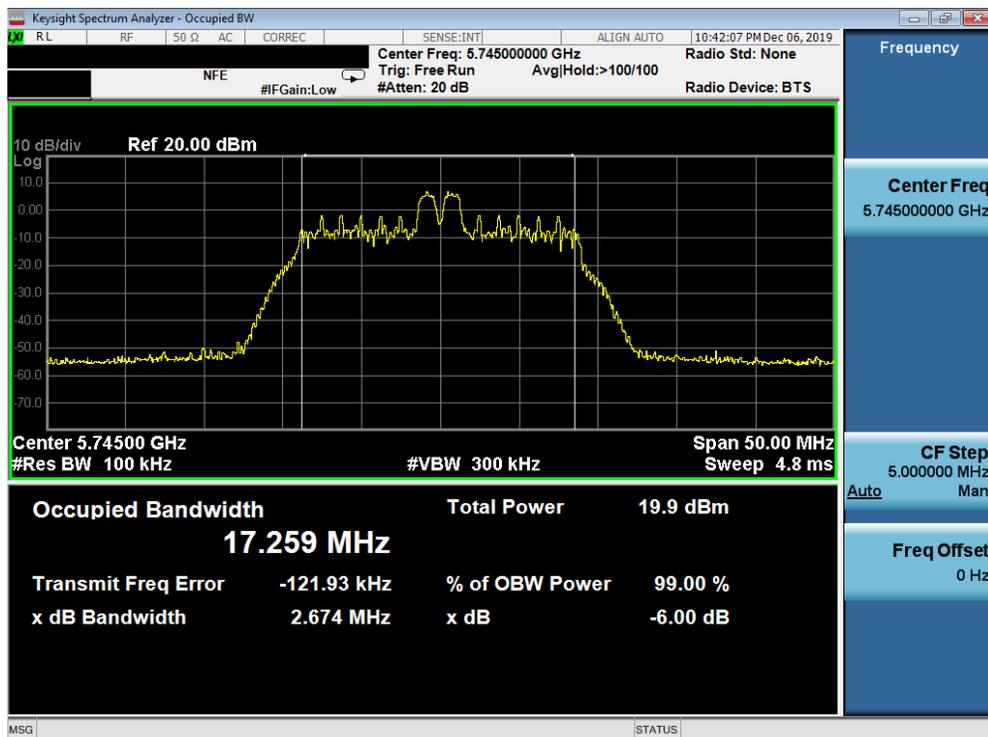


Plot 7-43. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 149)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 41 of 270

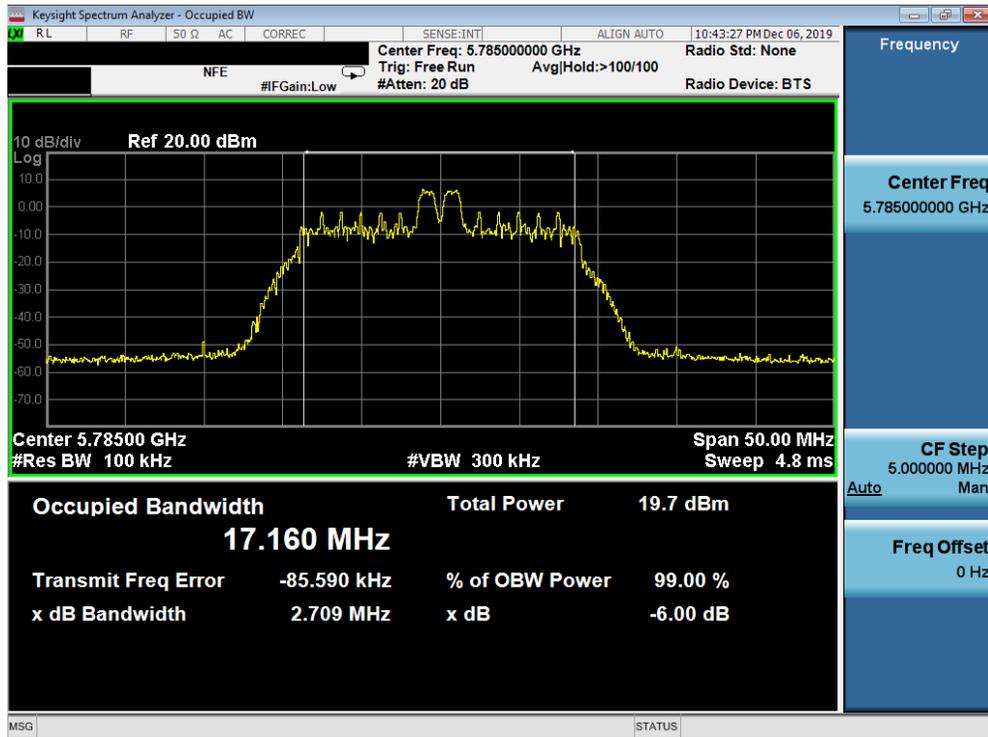

Plot 7-44. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

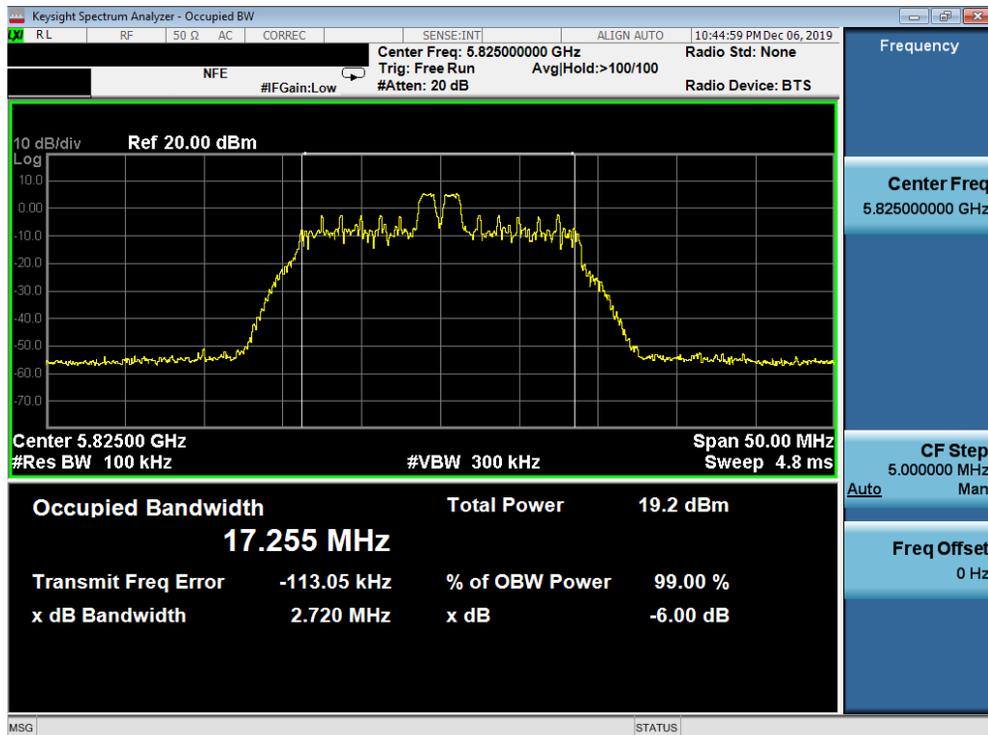


Plot 7-45. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 165)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 42 of 270




Plot 7-46. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

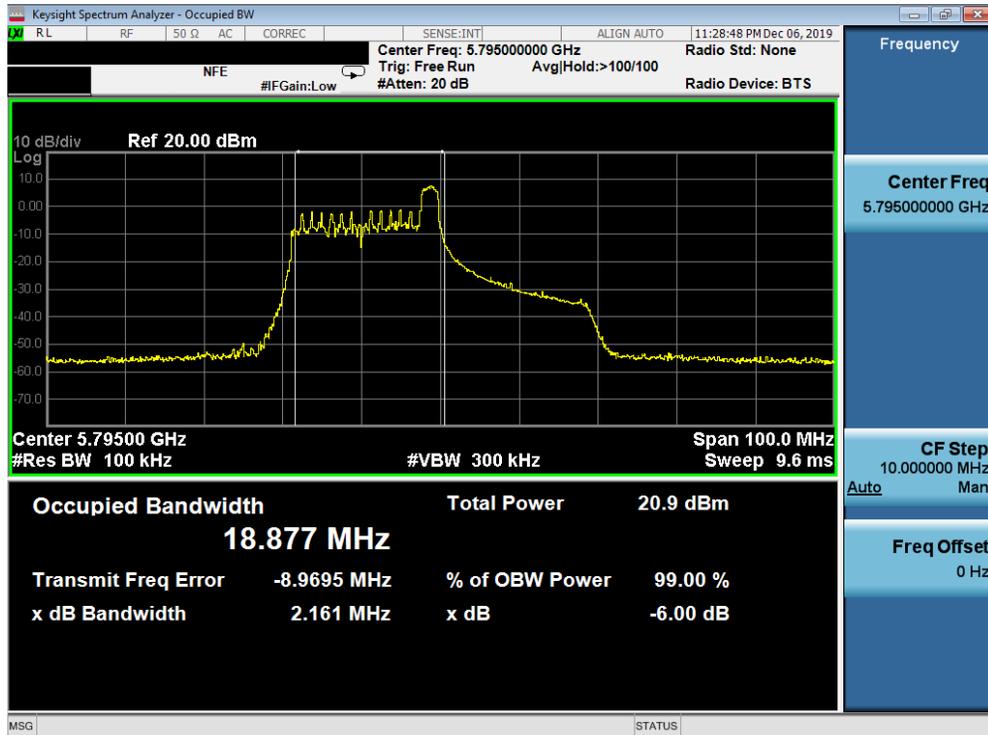

Plot 7-47. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 159)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 43 of 270

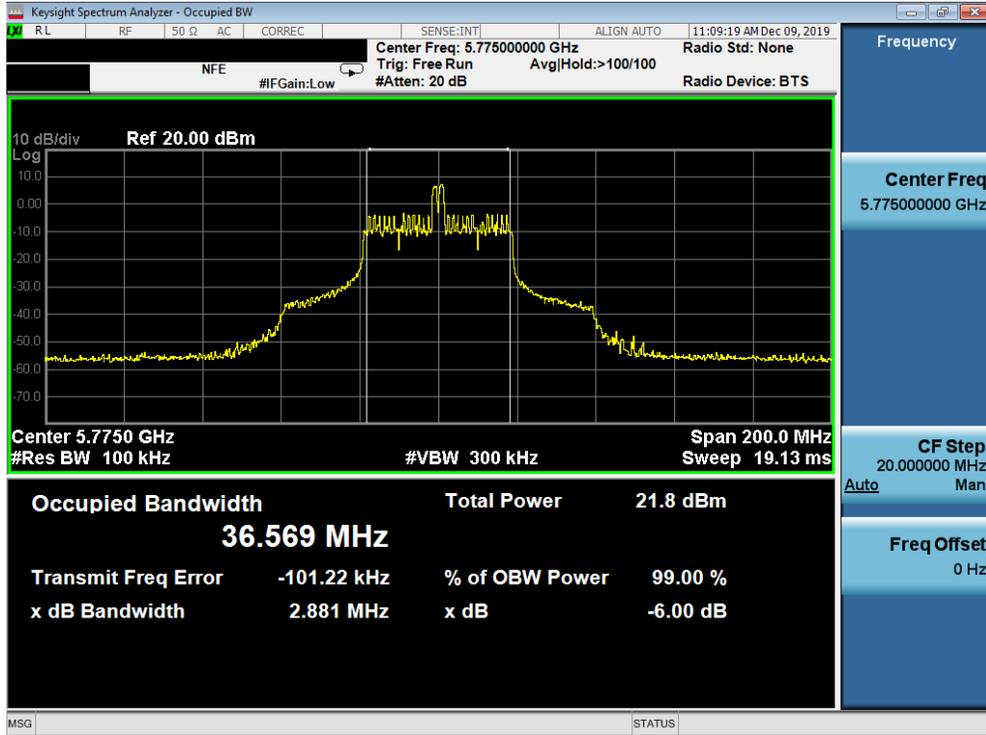


Plot 7-48. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 44 of 270

SISO Antenna-2 6dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	ax (20MHz)	26T	MCS0	2.73
	5785	157	ax (20MHz)	26T	MCS0	2.72
	5825	165	ax (20MHz)	26T	MCS0	2.71
	5755	151	ax (40MHz)	26T	MCS0	2.14
	5795	159	ax (40MHz)	26T	MCS0	2.18
	5775	155	ax (80MHz)	26T	MCS0	2.88

Table 7-5. Conducted Bandwidth Measurements SISO ANT2 (26 Tones)

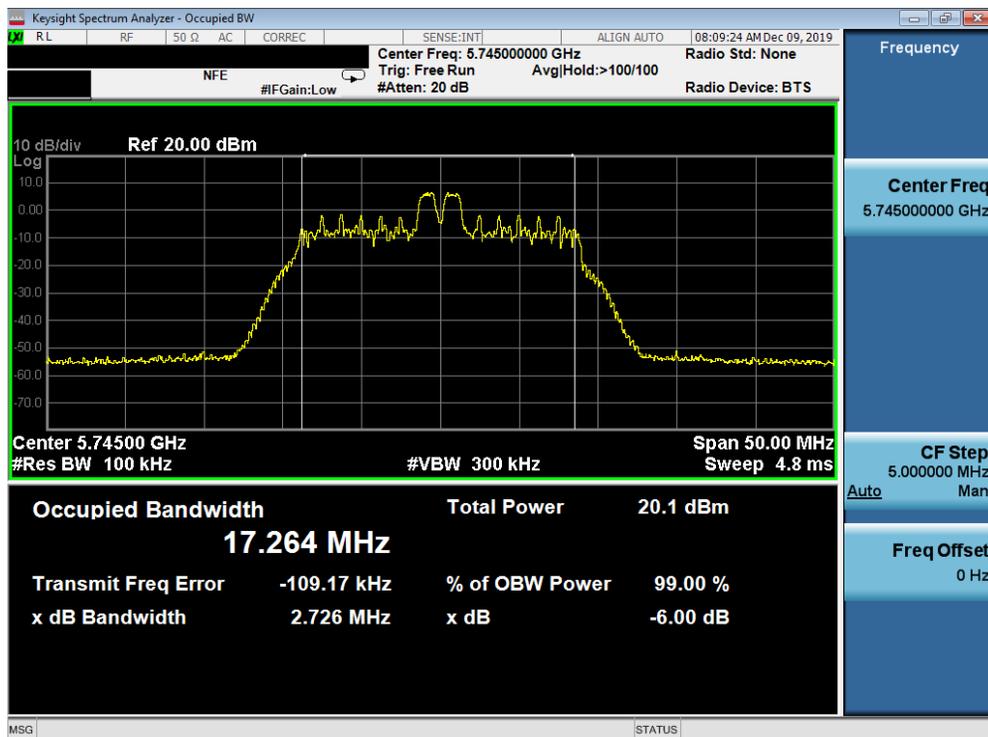


Plot 7-49. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 149)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 45 of 270

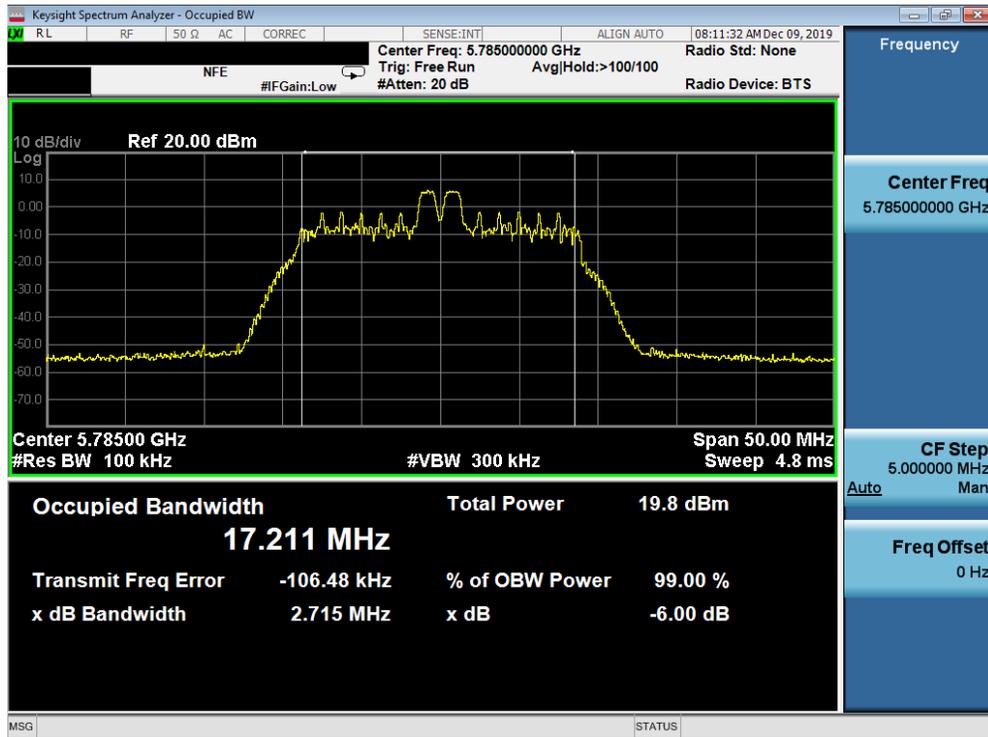

Plot 7-50. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

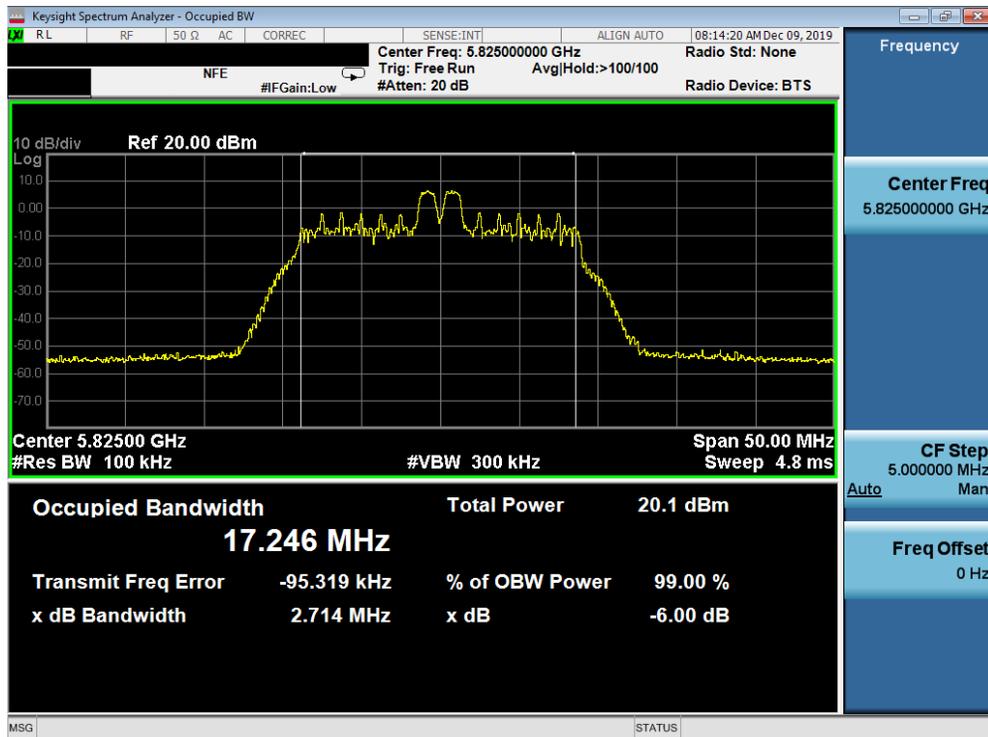


Plot 7-51. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 165)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 46 of 270




Plot 7-52. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

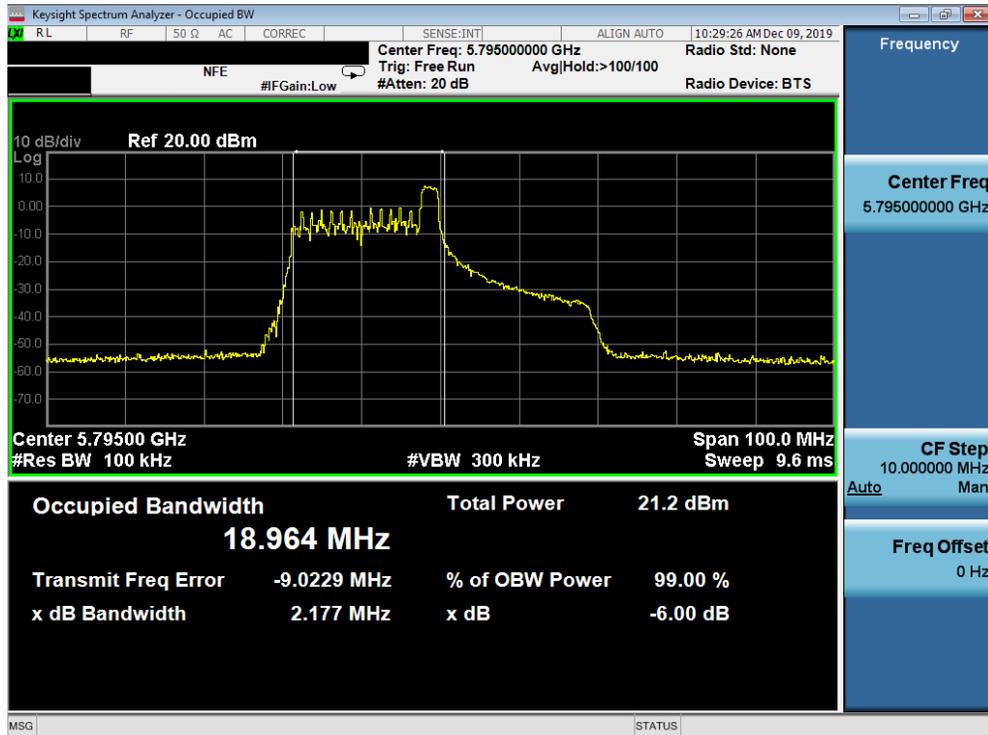

Plot 7-53. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 159)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 47 of 270

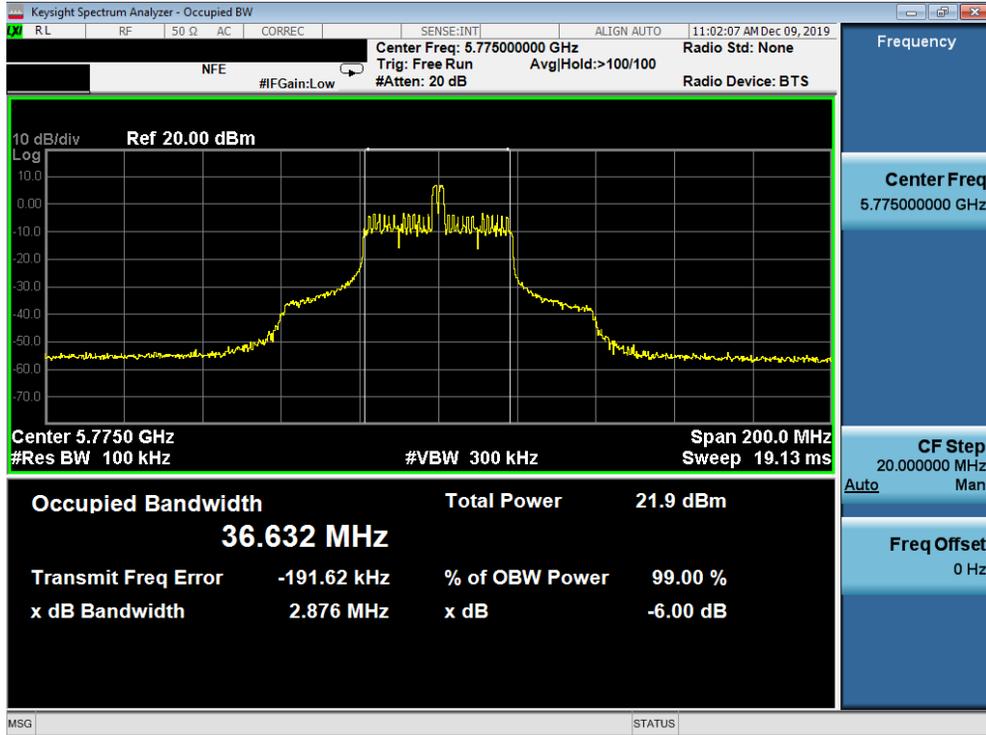

Plot 7-54. 6dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 48 of 270

7.4 UNII Output Power Measurement – 802.11ax OFDMA

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or $10 + 10 \log_{10}B$, dBm.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(31.57) = 25.99\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(21.77) = 24.38\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
 KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
 KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 49 of 270

SISO Antenna-1 Conducted Output Power Measurements (26 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0	4	8						
					5180	36	AVG						
5200	40	AVG	26T	10.42	10.77	10.69	23.98	-13.21	-7.40	3.37	22.39	-19.02	
5240	48	AVG	26T	10.54	10.90	10.92	23.98	-13.06	-8.60	2.32	22.39	-20.07	
5260	52	AVG	26T	10.62	10.89	10.65	23.47	-12.58	-8.60	2.29	29.47	-27.18	
5280	56	AVG	26T	10.61	10.89	10.82	23.47	-12.58	-8.60	2.29	29.47	-27.18	
5320	64	AVG	26T	10.73	10.98	10.68	23.47	-12.49	-8.60	2.38	29.47	-27.09	
5500	100	AVG	26T	10.84	10.15	10.89	22.80	-11.91	-9.10	1.79	28.80	-27.01	
5600	120	AVG	26T	10.91	10.39	10.88	22.80	-11.89	-9.10	1.81	28.80	-26.99	
5720	144	AVG	26T	10.88	10.24	10.86	22.80	-11.92	-6.70	4.18	28.80	-24.62	
5745	149	AVG	26T	10.58	10.73	10.48	30.00	-19.27	-6.70	4.03	-	-	
5785	157	AVG	26T	10.41	10.74	10.44	30.00	-19.26	-6.70	4.04	-	-	
5825	165	AVG	26T	10.03	10.25	10.02	30.00	-19.75	-5.90	4.35	-	-	

Table 7-6. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0	8	17						
					5190	38	AVG						
5230	46	AVG	26T	10.14	10.40	10.27	23.98	-13.58	-8.60	1.80	22.39	-20.59	
5270	54	AVG	26T	10.09	10.18	10.11	23.47	-13.29	-8.60	1.58	29.47	-27.89	
5310	62	AVG	26T	10.17	10.30	10.12	23.47	-13.17	-8.60	1.70	29.47	-27.77	
5510	102	AVG	26T	10.33	10.57	10.63	22.80	-12.17	-9.10	1.53	28.80	-27.27	
5590	118	AVG	26T	10.37	10.61	10.46	22.80	-12.19	-9.10	1.51	28.80	-27.29	
5710	142	AVG	26T	10.47	10.61	10.41	22.80	-12.19	-6.70	3.91	28.80	-24.89	
5755	151	AVG	26T	10.21	10.26	10.26	30.00	-19.74	-6.70	3.56	-	-	
5795	159	AVG	26T	10.48	10.98	10.34	30.00	-19.02	-5.90	5.08	-	-	

Table 7-7. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0	18	36						
					5210	42	AVG						
5290	58	AVG	26T	10.72	10.48	10.82	23.47	-12.65	-8.60	2.22	29.47	-27.25	
5530	106	AVG	26T	10.23	10.99	10.27	22.80	-11.81	-9.10	1.89	28.80	-26.91	
5610	122	AVG	26T	10.15	10.86	10.14	22.80	-11.94	-9.10	1.76	28.80	-27.04	
5690	138	AVG	26T	10.24	10.91	10.20	22.80	-11.89	-6.70	4.21	28.80	-24.59	
5775	155	AVG	26T	10.90	10.47	10.63	30.00	-19.10	-5.90	5.00	-	-	

Table 7-8. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 50 of 270

SISO Antenna-1 Conducted Output Power Measurements (52 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37	39	40						
					5180	36	AVG						
5200	40	AVG	52T	12.50	12.77	12.68	23.98	-11.21	-7.40	5.37	22.39	-17.02	
5240	48	AVG	52T	12.55	12.86	12.88	23.98	-11.10	-8.60	4.28	22.39	-18.11	
5260	52	AVG	52T	12.52	12.87	12.67	23.47	-10.60	-8.60	4.27	29.47	-25.20	
5280	56	AVG	52T	12.67	12.97	12.83	23.47	-10.50	-8.60	4.37	29.47	-25.10	
5320	64	AVG	52T	12.84	12.02	12.89	23.47	-10.58	-8.60	4.29	29.47	-25.18	
5500	100	AVG	52T	12.87	12.06	12.88	22.80	-9.92	-9.10	3.78	28.80	-25.02	
5600	120	AVG	52T	12.99	12.17	12.92	22.80	-9.81	-9.10	3.89	28.80	-24.91	
5720	144	AVG	52T	12.82	12.97	12.84	22.80	-9.83	-6.70	6.27	28.80	-22.53	
5745	149	AVG	52T	12.45	12.51	12.23	30.00	-17.49	-6.70	5.81	-	-	
5785	157	AVG	52T	12.22	12.56	12.28	30.00	-17.44	-6.70	5.86	-	-	
5825	165	AVG	52T	12.76	12.97	12.89	30.00	-17.03	-5.90	7.07	-	-	

Table 7-9. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37	40	44						
					5190	38	AVG						
5230	46	AVG	52T	12.17	12.24	12.31	23.98	-11.67	-8.60	3.71	22.39	-18.68	
5270	54	AVG	52T	12.32	12.23	12.37	23.47	-11.10	-8.60	3.77	29.47	-25.70	
5310	62	AVG	52T	12.34	12.29	12.34	23.47	-11.13	-8.60	3.74	29.47	-25.73	
5510	102	AVG	52T	12.47	12.34	12.74	22.80	-10.06	-9.10	3.64	28.80	-25.16	
5590	118	AVG	52T	12.50	12.31	12.56	22.80	-10.24	-9.10	3.46	28.80	-25.34	
5710	142	AVG	52T	12.48	12.40	12.40	22.80	-10.32	-6.70	5.78	28.80	-23.02	
5755	151	AVG	52T	12.17	12.98	12.18	30.00	-17.02	-6.70	6.28	-	-	
5795	159	AVG	52T	12.48	12.75	12.44	30.00	-17.25	-5.90	6.85	-	-	

Table 7-10. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37	44	52						
					5210	42	AVG						
5290	58	AVG	52T	12.76	12.47	12.89	23.47	-10.58	-8.60	4.29	29.47	-25.18	
5530	106	AVG	52T	12.30	12.57	12.29	22.80	-10.23	-9.10	3.47	28.80	-25.33	
5610	122	AVG	52T	12.24	12.50	12.24	22.80	-10.30	-9.10	3.40	28.80	-25.40	
5690	138	AVG	52T	12.25	12.62	12.13	22.80	-10.18	-6.70	5.92	28.80	-22.88	
5775	155	AVG	52T	12.71	12.26	12.53	30.00	-17.29	-5.90	6.81	-	-	

Table 7-11. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 51 of 270	

SISO Antenna-1 Conducted Output Power Measurements (106 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53	54						
					5180	36						
5200	40	AVG	106T	14.71	14.78	23.98	-9.20	-7.40	7.38	22.39	-15.01	
5240	48	AVG	106T	14.75	14.91	23.98	-9.07	-8.60	6.31	22.39	-16.08	
5260	52	AVG	106T	14.72	14.73	23.47	-8.74	-8.60	6.13	29.47	-23.34	
5280	56	AVG	106T	14.69	14.86	23.47	-8.61	-8.60	6.26	29.47	-23.21	
5320	64	AVG	106T	14.92	14.89	23.47	-8.55	-8.60	6.32	29.47	-23.15	
5500	100	AVG	106T	14.82	14.70	22.80	-7.98	-9.10	5.72	28.80	-23.08	
5600	120	AVG	106T	14.72	14.78	22.80	-8.02	-9.10	5.68	28.80	-23.12	
5720	144	AVG	106T	14.62	14.64	22.80	-8.16	-6.70	7.94	28.80	-20.86	
5745	149	AVG	106T	14.58	14.44	30.00	-15.42	-6.70	7.88	-	-	
5785	157	AVG	106T	14.45	14.42	30.00	-15.55	-6.70	7.75	-	-	
5825	165	AVG	106T	14.92	14.94	30.00	-15.06	-5.90	9.04	-	-	

Table 7-12. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53	54	56						
					5190	38	AVG						
5230	46	AVG	106T	14.38	14.23	14.47	23.98	-9.51	-8.60	5.87	22.39	-16.52	
5270	54	AVG	106T	14.43	14.05	14.38	23.47	-9.04	-8.60	5.83	29.47	-23.64	
5310	62	AVG	106T	14.44	14.10	14.32	23.47	-9.03	-8.60	5.84	29.47	-23.63	
5510	102	AVG	106T	14.29	14.17	14.67	22.80	-8.13	-9.10	5.57	28.80	-23.23	
5590	118	AVG	106T	14.35	14.17	14.42	22.80	-8.38	-9.10	5.32	28.80	-23.48	
5710	142	AVG	106T	14.36	14.07	14.36	22.80	-8.44	-6.70	7.66	28.80	-21.14	
5755	151	AVG	106T	14.24	14.79	14.23	30.00	-15.21	-6.70	8.09	-	-	
5795	159	AVG	106T	14.76	14.62	14.71	30.00	-15.24	-5.90	8.86	-	-	

Table 7-13. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53	56	60						
					5210	42	AVG						
5290	58	AVG	106T	14.84	14.28	14.87	23.47	-8.60	-8.60	6.27	29.47	-23.20	
5530	106	AVG	106T	14.07	14.25	14.03	22.80	-8.55	-9.10	5.15	28.80	-23.65	
5610	122	AVG	106T	14.01	14.24	14.01	22.80	-8.56	-9.10	5.14	28.80	-23.66	
5690	138	AVG	106T	14.99	14.21	14.92	22.80	-7.81	-6.70	8.29	28.80	-20.51	
5775	155	AVG	106T	14.91	14.18	14.71	30.00	-15.09	-5.90	9.01	-	-	

Table 7-14. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 52 of 270	

SISO Antenna-1 Conducted Output Power Measurements (242 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						61					
	5180	36	AVG	242T	14.75	23.98	-9.23	-7.40	7.35	22.39	-15.04
	5200	40	AVG	242T	17.63	23.98	-6.35	-7.40	10.23	22.39	-12.16
	5240	48	AVG	242T	17.74	23.98	-6.24	-8.60	9.14	22.39	-13.25
	5260	52	AVG	242T	17.37	23.47	-6.10	-8.60	8.77	29.47	-20.70
	5280	56	AVG	242T	17.47	23.47	-6.00	-8.60	8.87	29.47	-20.60
	5320	64	AVG	242T	13.42	23.47	-10.05	-8.60	4.82	29.47	-24.65
	5500	100	AVG	242T	16.46	22.80	-6.34	-9.10	7.36	28.80	-21.44
	5600	120	AVG	242T	17.19	22.80	-5.61	-9.10	8.09	28.80	-20.71
	5720	144	AVG	242T	17.07	22.80	-5.73	-6.70	10.37	28.80	-18.43
	5745	149	AVG	242T	17.20	30.00	-12.80	-6.70	10.50	-	-
	5785	157	AVG	242T	17.08	30.00	-12.92	-6.70	10.38	-	-
	5825	165	AVG	242T	17.87	30.00	-12.13	-5.90	11.97	-	-

Table 7-15. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
						61	62						
	5190	38	AVG	242T	16.44	16.47	23.98	-7.51	-7.40	9.07	22.39	-13.32	
	5230	46	AVG	242T	16.63	16.55	23.98	-7.35	-8.60	8.03	22.39	-14.36	
	5270	54	AVG	242T	16.44	16.52	23.47	-6.95	-8.60	7.92	29.47	-21.55	
	5310	62	AVG	242T	16.41	16.45	23.47	-7.02	-8.60	7.85	29.47	-21.62	
	5510	102	AVG	242T	16.38	16.53	22.80	-6.27	-9.10	7.43	28.80	-21.37	
	5590	118	AVG	242T	16.32	16.34	22.80	-6.46	-9.10	7.24	28.80	-21.56	
	5710	142	AVG	242T	16.23	16.25	22.80	-6.55	-6.70	9.55	28.80	-19.25	
	5755	151	AVG	242T	16.46	16.46	30.00	-13.54	-6.70	9.76	-	-	
	5795	159	AVG	242T	16.01	16.11	30.00	-13.89	-5.90	10.21	-	-	

Table 7-16. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						61	62	64					
	5210	42	AVG	242T	15.98	15.51	15.21	23.98	-8.00	-7.40	8.58	22.39	-13.81
	5290	58	AVG	242T	15.09	15.46	15.16	23.47	-8.01	-8.60	6.86	29.47	-22.61
	5530	106	AVG	242T	15.33	15.53	15.30	22.80	-7.27	-9.10	6.43	28.80	-22.37
	5610	122	AVG	242T	15.20	15.30	15.24	22.80	-7.50	-9.10	6.20	28.80	-22.60
	5690	138	AVG	242T	15.25	15.32	15.18	22.80	-7.48	-6.70	8.62	28.80	-20.18
	5775	155	AVG	242T	15.13	15.16	15.85	30.00	-14.15	-5.90	9.95	-	-

Table 7-17. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 53 of 270	

SISO Antenna-1 Conducted Output Power Measurements (484 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
						65						
	5190	38	AVG	484T	12.03	23.98	-11.95	-7.40	4.63	22.39	-17.76	
	5230	46	AVG	484T	16.40	23.98	-7.58	-8.60	7.80	22.39	-14.59	
	5270	54	AVG	484T	16.29	23.47	-7.18	-8.60	7.69	29.47	-21.78	
	5310	62	AVG	484T	12.14	23.47	-11.33	-8.60	3.54	29.47	-25.93	
	5510	102	AVG	484T	13.22	22.80	-9.58	-9.10	4.12	28.80	-24.68	
	5590	118	AVG	484T	16.29	22.80	-6.51	-9.10	7.19	28.80	-21.61	
	5710	142	AVG	484T	16.30	22.80	-6.50	-6.70	9.60	28.80	-19.20	
	5755	151	AVG	484T	16.20	30.00	-13.80	-6.70	9.50	-	-	
5795	159	AVG	484T	16.94	30.00	-13.06	-5.90	11.04	-	-		

Table 7-18. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					65	66						
					5210	42						
5290	58	AVG	484T	13.79	13.94	23.47	-9.53	-8.60	5.34	29.47	-24.13	
5530	106	AVG	484T	15.13	15.21	22.80	-7.59	-9.10	6.11	28.80	-22.69	
5610	122	AVG	484T	15.88	15.98	22.80	-6.82	-9.10	6.88	28.80	-21.92	
5690	138	AVG	484T	15.98	15.91	22.80	-6.82	-6.70	9.28	28.80	-19.52	
5775	155	AVG	484T	15.81	15.78	30.00	-14.19	-5.90	9.91	-	-	

Table 7-19. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 54 of 270	

SISO Antenna-1 Conducted Output Power Measurements (996 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						67					
	5210	42	AVG	996T	11.96	23.98	-12.02	-7.40	4.56	22.39	-17.83
	5290	58	AVG	996T	11.97	23.47	-11.50	-8.60	3.37	29.47	-26.10
	5530	106	AVG	996T	12.21	22.80	-10.59	-9.10	3.11	28.80	-25.69
	5610	122	AVG	996T	15.81	22.80	-6.99	-9.10	6.71	28.80	-22.09
	5690	138	AVG	996T	15.80	22.80	-7.00	-6.70	9.10	28.80	-19.70
	5775	155	AVG	996T	15.66	30.00	-14.34	-5.90	9.76	-	-

Table 7-20. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 55 of 270	

SISO Antenna-2 Conducted Output Power Measurements (26 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0	4	8						
					5180	36	AVG						
5200	40	AVG	26T	10.78	10.94	10.87	23.98	-13.04	-7.20	3.74	22.39	-18.65	
5240	48	AVG	26T	10.86	10.23	10.97	23.98	-13.01	-5.70	5.27	22.39	-17.12	
5260	52	AVG	26T	10.54	10.78	10.65	23.47	-12.69	-5.70	5.08	29.47	-24.39	
5280	56	AVG	26T	10.57	10.89	10.66	23.47	-12.58	-5.70	5.19	29.47	-24.28	
5320	64	AVG	26T	10.65	10.92	10.87	23.47	-12.55	-5.70	5.22	29.47	-24.25	
5500	100	AVG	26T	10.57	10.67	10.45	22.80	-12.13	-7.20	3.47	28.80	-25.33	
5600	120	AVG	26T	10.77	10.95	10.68	22.80	-11.85	-7.20	3.75	28.80	-25.05	
5720	144	AVG	26T	10.99	10.16	10.94	22.80	-11.81	-6.30	4.69	28.80	-24.11	
5745	149	AVG	26T	10.46	10.62	10.24	30.00	-19.38	-6.30	4.32	-	-	
5785	157	AVG	26T	10.42	10.67	10.34	30.00	-19.33	-6.30	4.37	-	-	
5825	165	AVG	26T	10.20	10.49	10.15	30.00	-19.51	-7.10	3.39	-	-	

Table 7-21. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0	8	17						
					5190	38	AVG						
5230	46	AVG	26T	10.08	10.38	10.27	23.98	-13.60	-5.70	4.68	22.39	-17.71	
5270	54	AVG	26T	10.84	10.95	10.92	23.47	-12.52	-5.70	5.25	29.47	-24.22	
5310	62	AVG	26T	10.93	10.91	10.80	23.47	-12.54	-5.70	5.23	29.47	-24.24	
5510	102	AVG	26T	10.88	10.73	10.93	22.80	-11.87	-7.20	3.73	28.80	-25.07	
5590	118	AVG	26T	10.93	10.83	10.70	22.80	-11.87	-7.20	3.73	28.80	-25.07	
5710	142	AVG	26T	10.30	10.14	10.26	22.80	-12.50	-6.30	4.00	28.80	-24.80	
5755	151	AVG	26T	10.77	10.61	10.78	30.00	-19.22	-6.30	4.48	-	-	
5795	159	AVG	26T	10.32	10.71	10.24	30.00	-19.29	-7.10	3.61	-	-	

Table 7-22. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0	18	36						
					5210	42	AVG						
5290	58	AVG	26T	10.71	10.47	10.85	23.47	-12.62	-5.70	5.15	29.47	-24.32	
5530	106	AVG	26T	10.94	10.35	10.79	22.80	-11.86	-7.20	3.74	28.80	-25.06	
5610	122	AVG	26T	10.84	10.40	10.78	22.80	-11.96	-7.20	3.64	28.80	-25.16	
5690	138	AVG	26T	10.98	10.60	10.90	22.80	-11.82	-6.30	4.68	28.80	-24.12	
5775	155	AVG	26T	10.56	10.32	10.57	30.00	-19.43	-7.10	3.47	-	-	

Table 7-23. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 56 of 270	

SISO Antenna-2 Conducted Output Power Measurements (52 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37	39	40						
					5180	36	AVG						
5200	40	AVG	52T	12.65	12.81	12.70	23.98	-11.17	-7.20	5.61	22.39	-16.78	
5240	48	AVG	52T	12.67	12.88	12.83	23.98	-11.10	-5.70	7.18	22.39	-15.21	
5260	52	AVG	52T	12.47	12.71	12.68	23.47	-10.76	-5.70	7.01	29.47	-22.46	
5280	56	AVG	52T	12.48	12.80	12.70	23.47	-10.67	-5.70	7.10	29.47	-22.37	
5320	64	AVG	52T	12.69	12.87	12.72	23.47	-10.60	-5.70	7.17	29.47	-22.30	
5500	100	AVG	52T	12.45	12.64	12.40	22.80	-10.16	-7.20	5.44	28.80	-23.36	
5600	120	AVG	52T	12.82	12.74	12.65	22.80	-9.98	-7.20	5.62	28.80	-23.18	
5720	144	AVG	52T	12.95	12.94	12.82	22.80	-9.85	-6.30	6.65	28.80	-22.15	
5745	149	AVG	52T	12.20	12.27	12.09	30.00	-17.73	-6.30	5.97	-	-	
5785	157	AVG	52T	12.32	12.42	12.12	30.00	-17.58	-6.30	6.12	-	-	
5825	165	AVG	52T	12.11	12.16	12.02	30.00	-17.84	-7.10	5.06	-	-	

Table 7-24. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37	40	44						
					5190	38	AVG						
5230	46	AVG	52T	12.23	12.30	12.32	23.98	-11.66	-5.70	6.62	22.39	-15.77	
5270	54	AVG	52T	12.02	12.84	12.01	23.47	-10.63	-5.70	7.14	29.47	-22.33	
5310	62	AVG	52T	12.08	12.97	12.07	23.47	-10.50	-5.70	7.27	29.47	-22.20	
5510	102	AVG	52T	12.06	12.82	12.10	22.80	-9.98	-7.20	5.62	28.80	-23.18	
5590	118	AVG	52T	12.07	12.73	12.02	22.80	-10.07	-7.20	5.53	28.80	-23.27	
5710	142	AVG	52T	12.34	12.98	12.33	22.80	-9.82	-6.30	6.68	28.80	-22.12	
5755	151	AVG	52T	12.93	12.60	12.80	30.00	-17.07	-6.30	6.63	-	-	
5795	159	AVG	52T	12.38	12.61	12.40	30.00	-17.39	-7.10	5.51	-	-	

Table 7-25. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37	44	52						
					5210	42	AVG						
5290	58	AVG	52T	12.94	12.38	12.97	23.47	-10.50	-5.70	7.27	29.47	-22.20	
5530	106	AVG	52T	12.91	12.17	12.78	22.80	-9.89	-7.20	5.71	28.80	-23.09	
5610	122	AVG	52T	12.82	12.14	12.81	22.80	-9.98	-7.20	5.62	28.80	-23.18	
5690	138	AVG	52T	12.98	12.33	12.92	22.80	-9.82	-6.30	6.68	28.80	-22.12	
5775	155	AVG	52T	12.69	12.86	12.57	30.00	-17.14	-7.10	5.76	-	-	

Table 7-26. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 57 of 270	

SISO Antenna-2 Conducted Output Power Measurements (106 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53	54						
					5180	36						
5200	40	AVG	106T	14.61	14.78	23.98	-9.20	-7.20	7.58	22.39	-14.81	
5240	48	AVG	106T	14.81	14.80	23.98	-9.17	-5.70	9.11	22.39	-13.28	
5260	52	AVG	106T	14.51	14.58	23.47	-8.89	-5.70	8.88	29.47	-20.59	
5280	56	AVG	106T	14.65	14.73	23.47	-8.74	-5.70	9.03	29.47	-20.44	
5320	64	AVG	106T	14.66	14.73	23.47	-8.74	-5.70	9.03	29.47	-20.44	
5500	100	AVG	106T	14.60	14.47	22.80	-8.20	-7.20	7.40	28.80	-21.40	
5600	120	AVG	106T	14.73	14.65	22.80	-8.07	-7.20	7.53	28.80	-21.27	
5720	144	AVG	106T	14.84	14.78	22.80	-7.96	-6.30	8.54	28.80	-20.26	
5745	149	AVG	106T	14.19	14.97	30.00	-15.03	-6.30	8.67	-	-	
5785	157	AVG	106T	14.15	14.05	30.00	-15.85	-6.30	7.85	-	-	
5825	165	AVG	106T	14.95	14.84	30.00	-15.05	-7.10	7.85	-	-	

Table 7-27. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53	54	56						
					5190	38	AVG						
5230	46	AVG	106T	14.48	14.28	14.55	23.98	-9.43	-5.70	8.85	22.39	-13.54	
5270	54	AVG	106T	14.28	14.87	14.27	23.47	-8.60	-5.70	9.17	29.47	-20.30	
5310	62	AVG	106T	14.38	14.95	14.31	23.47	-8.52	-5.70	9.25	29.47	-20.22	
5510	102	AVG	106T	14.25	14.71	14.25	22.80	-8.09	-7.20	7.51	28.80	-21.29	
5590	118	AVG	106T	14.26	14.67	14.80	22.80	-8.00	-7.20	7.60	28.80	-21.20	
5710	142	AVG	106T	14.54	14.93	14.56	22.80	-7.87	-6.30	8.63	28.80	-20.17	
5755	151	AVG	106T	14.96	14.30	14.90	30.00	-15.04	-6.30	8.66	-	-	
5795	159	AVG	106T	14.61	14.22	14.64	30.00	-15.36	-7.10	7.54	-	-	

Table 7-28. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53	56	60						
					5210	42	AVG						
5290	58	AVG	106T	14.03	14.43	14.11	23.47	-9.04	-5.70	8.73	29.47	-20.74	
5530	106	AVG	106T	14.04	14.24	14.04	22.80	-8.56	-7.20	7.04	28.80	-21.76	
5610	122	AVG	106T	14.15	14.27	14.12	22.80	-8.53	-7.20	7.07	28.80	-21.73	
5690	138	AVG	106T	14.31	14.41	14.19	22.80	-8.39	-6.30	8.11	28.80	-20.69	
5775	155	AVG	106T	14.67	14.88	14.77	30.00	-15.12	-7.10	7.78	-	-	

Table 7-29. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 58 of 270	

SISO Antenna-2 Conducted Output Power Measurements (242 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						61					
	5180	36	AVG	242T	14.96	23.98	-9.02	-7.20	7.76	22.39	-14.63
	5200	40	AVG	242T	17.56	23.98	-6.42	-7.20	10.36	22.39	-12.03
	5240	48	AVG	242T	17.55	23.98	-6.43	-5.70	11.85	22.39	-10.54
	5260	52	AVG	242T	17.42	23.47	-6.05	-5.70	11.72	29.47	-17.75
	5280	56	AVG	242T	17.50	23.47	-5.97	-5.70	11.80	29.47	-17.67
	5320	64	AVG	242T	13.41	23.47	-10.06	-5.70	7.71	29.47	-21.76
	5500	100	AVG	242T	16.04	22.80	-6.76	-7.20	8.84	28.80	-19.96
	5600	120	AVG	242T	17.43	22.80	-5.37	-7.20	10.23	28.80	-18.57
	5720	144	AVG	242T	17.55	22.80	-5.25	-6.30	11.25	28.80	-17.55
	5745	149	AVG	242T	17.66	30.00	-12.34	-6.30	11.36	-	-
	5785	157	AVG	242T	17.89	30.00	-12.11	-6.30	11.59	-	-
	5825	165	AVG	242T	17.68	30.00	-12.32	-7.10	10.58	-	-

Table 7-30. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						61	62					
	5190	38	AVG	242T	16.57	16.59	23.98	-7.39	-7.20	9.39	22.39	-13.00
	5230	46	AVG	242T	16.61	16.60	23.98	-7.37	-5.70	10.91	22.39	-11.48
	5270	54	AVG	242T	16.37	16.43	23.47	-7.04	-5.70	10.73	29.47	-18.74
	5310	62	AVG	242T	16.66	16.44	23.47	-6.81	-5.70	10.96	29.47	-18.51
	5510	102	AVG	242T	16.14	16.35	22.80	-6.45	-7.20	9.15	28.80	-19.65
	5590	118	AVG	242T	16.12	16.29	22.80	-6.51	-7.20	9.09	28.80	-19.71
	5710	142	AVG	242T	16.43	16.47	22.80	-6.33	-6.30	10.17	28.80	-18.63
	5755	151	AVG	242T	16.66	16.93	30.00	-13.07	-6.30	10.63	-	-
	5795	159	AVG	242T	16.56	16.65	30.00	-13.35	-7.10	9.55	-	-

Table 7-31. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						61	62	64					
	5210	42	AVG	242T	15.48	15.73	15.56	23.98	-8.25	-7.20	8.53	22.39	-13.86
	5290	58	AVG	242T	15.38	15.63	15.35	23.47	-7.84	-5.70	9.93	29.47	-19.54
	5530	106	AVG	242T	15.12	15.45	15.08	22.80	-7.35	-7.20	8.25	28.80	-20.55
	5610	122	AVG	242T	15.13	15.43	15.20	22.80	-7.37	-7.20	8.23	28.80	-20.57
	5690	138	AVG	242T	15.26	15.53	15.38	22.80	-7.27	-6.30	9.23	28.80	-19.57
	5775	155	AVG	242T	15.64	15.98	15.77	30.00	-14.02	-7.10	8.88	-	-

Table 7-32. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 59 of 270	

SISO Antenna-2 Conducted Output Power Measurements (484 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
						65						
	5190	38	AVG	484T	11.93	23.98	-12.05	-7.20	4.73	22.39	-17.66	
	5230	46	AVG	484T	16.57	23.98	-7.41	-5.70	10.87	22.39	-11.52	
	5270	54	AVG	484T	16.43	23.47	-7.04	-5.70	10.73	29.47	-18.74	
	5310	62	AVG	484T	12.16	23.47	-11.31	-5.70	6.46	29.47	-23.01	
	5510	102	AVG	484T	13.24	22.80	-9.56	-7.20	6.04	28.80	-22.76	
	5590	118	AVG	484T	16.14	22.80	-6.66	-7.20	8.94	28.80	-19.86	
	5710	142	AVG	484T	16.30	22.80	-6.50	-6.30	10.00	28.80	-18.80	
	5755	151	AVG	484T	16.70	30.00	-13.30	-6.30	10.40	-	-	
5795	159	AVG	484T	16.57	30.00	-13.43	-7.10	9.47	-	-		

Table 7-33. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					65	66						
	5210	42	AVG	484T	13.74	13.89	23.98	-10.09	-7.20	6.69	22.39	-15.70
5290	58	AVG	484T	13.83	13.96	23.47	-9.51	-5.70	8.26	29.47	-21.21	
5530	106	AVG	484T	15.10	15.25	22.80	-7.55	-7.20	8.05	28.80	-20.75	
5610	122	AVG	484T	15.04	15.21	22.80	-7.59	-7.20	8.01	28.80	-20.79	
5690	138	AVG	484T	15.23	15.37	22.80	-7.43	-6.30	9.07	28.80	-19.73	
5775	155	AVG	484T	15.68	15.86	30.00	-14.14	-7.10	8.76	-	-	

Table 7-34. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 60 of 270	

SISO Antenna-2 Conducted Output Power Measurements (996 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						67					
	5210	42	AVG	996T	12.07	23.98	-11.91	-7.20	4.87	22.39	-17.52
	5290	58	AVG	996T	11.98	23.47	-11.49	-5.70	6.28	29.47	-23.19
	5530	106	AVG	996T	12.23	22.80	-10.57	-7.20	5.03	28.80	-23.77
	5610	122	AVG	996T	15.42	22.80	-7.38	-7.20	8.22	28.80	-20.58
	5690	138	AVG	996T	15.50	22.80	-7.30	-6.30	9.20	28.80	-19.60
	5775	155	AVG	996T	15.92	30.00	-14.08	-7.10	8.82	-	-

Table 7-35. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 61 of 270	

MIMO Maximum Conducted Output Power Measurements (26 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0			4			8								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5180	36	AVG	26T	7.80	7.87	10.85	7.72	7.96	10.85	7.67	7.88	10.79	23.98	-13.13	-4.29	6.56	22.39	-15.83	
5200	40	AVG	26T	7.74	7.94	10.85	7.87	7.95	10.92	7.70	7.58	10.65	23.98	-13.06	-4.29	6.63	22.39	-15.76	
5240	48	AVG	26T	7.79	8.04	10.93	7.00	7.25	10.14	7.78	7.80	10.80	23.98	-13.05	-4.02	6.91	22.39	-15.48	
5260	52	AVG	26T	7.73	7.81	10.78	7.79	8.12	10.97	7.65	7.72	10.70	23.47	-12.50	-4.02	6.95	29.47	-22.52	
5280	56	AVG	26T	7.71	7.63	10.68	8.03	7.92	10.99	7.72	7.87	10.81	23.47	-12.48	-4.02	6.97	29.47	-22.50	
5320	64	AVG	26T	7.81	7.61	10.72	8.05	7.90	10.99	7.82	7.71	10.78	23.47	-12.48	-4.02	6.97	29.47	-22.50	
5500	100	AVG	26T	8.16	7.65	10.92	7.50	6.92	10.23	8.25	7.48	10.89	22.80	-11.88	-5.09	5.83	28.80	-22.97	
5600	120	AVG	26T	8.24	7.70	10.99	7.63	6.75	10.22	8.18	7.34	10.79	22.80	-11.81	-5.09	5.90	28.80	-22.90	
5720	144	AVG	26T	7.73	8.15	10.96	7.49	7.30	10.41	8.25	7.62	10.96	22.80	-11.84	-3.49	7.47	28.80	-21.33	
5745	149	AVG	26T	7.00	8.00	10.54	7.04	7.83	10.46	6.75	7.77	10.30	30.00	-19.46	-3.49	7.05	-	-	
5785	157	AVG	26T	6.71	7.77	10.28	7.09	8.28	10.74	6.42	7.63	10.08	30.00	-19.26	-3.49	7.25	-	-	
5825	165	AVG	26T	6.40	7.82	10.18	6.46	8.03	10.33	7.27	8.36	10.86	30.00	-19.14	-3.47	7.39	-	-	

Table 7-36. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0			8			17								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5190	38	AVG	26T	7.68	7.88	10.79	7.11	7.22	10.18	8.03	7.42	10.75	23.98	-13.19	-4.29	6.50	22.39	-15.89	
5230	46	AVG	26T	7.79	8.00	10.91	7.44	7.19	10.33	7.03	7.52	10.29	23.98	-13.07	-4.02	6.89	22.39	-15.50	
5270	54	AVG	26T	8.03	7.90	10.98	8.16	7.79	10.99	7.05	7.07	10.07	23.47	-12.48	-4.02	6.97	29.47	-22.50	
5310	62	AVG	26T	8.00	7.53	10.78	7.19	7.07	10.14	7.04	7.03	10.05	23.47	-12.69	-4.02	6.76	29.47	-22.71	
5510	102	AVG	26T	7.44	6.97	10.22	8.83	6.87	10.85	7.74	6.99	10.39	22.80	-11.95	-5.09	5.76	28.80	-23.04	
5590	118	AVG	26T	7.52	6.88	10.22	7.52	6.77	10.17	7.49	7.01	10.27	22.80	-12.53	-5.09	5.18	28.80	-23.62	
5710	142	AVG	26T	7.69	7.26	10.49	7.59	6.91	10.27	7.75	7.01	10.41	22.80	-12.31	-3.49	7.00	28.80	-21.80	
5755	151	AVG	26T	7.27	8.08	10.70	7.28	7.99	10.66	7.21	8.11	10.69	30.00	-19.30	-3.49	7.22	-	-	
5795	159	AVG	26T	6.59	7.74	10.21	6.95	8.32	10.70	6.56	7.78	10.22	30.00	-19.30	-3.47	7.23	-	-	

Table 7-37. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0			18			36								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5210	42	AVG	26T	7.31	7.61	10.47	7.26	7.73	10.51	7.53	8.02	10.79	23.98	-13.19	-4.29	6.50	22.39	-15.89	
5290	58	AVG	26T	7.57	7.68	10.64	6.98	7.40	10.21	7.92	7.89	10.92	23.47	-12.55	-4.02	6.90	29.47	-22.57	
5530	106	AVG	26T	8.13	7.72	10.94	7.82	7.39	10.62	8.16	7.78	10.98	22.80	-11.82	-5.09	5.90	28.80	-22.90	
5610	122	AVG	26T	8.24	7.51	10.90	7.78	7.30	10.56	8.14	7.78	10.97	22.80	-11.83	-5.09	5.89	28.80	-22.91	
5690	138	AVG	26T	7.46	6.71	10.11	7.89	7.48	10.70	7.27	6.96	10.13	22.80	-12.10	-3.49	7.21	28.80	-21.59	
5775	155	AVG	26T	6.71	7.79	10.29	7.26	8.45	10.91	6.66	7.80	10.28	30.00	-19.09	-3.47	7.44	-	-	

Table 7-38. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 62 of 270

MIMO Conducted Output Power Measurements (52 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37			39			40								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5180	36	AVG	52T	9.55	9.73	12.65	9.90	10.00	12.96	9.71	9.78	12.76	23.98	-11.02	-4.29	8.67	22.39	-13.72	
5200	40	AVG	52T	9.68	10.17	12.94	9.85	10.01	12.94	9.77	9.93	12.86	23.98	-11.04	-4.29	8.65	22.39	-13.74	
5240	48	AVG	52T	9.69	10.07	12.89	9.98	9.12	12.06	9.84	10.07	12.97	23.98	-11.01	-4.02	8.95	22.39	-13.44	
5260	52	AVG	52T	9.62	9.74	12.69	9.91	9.97	12.95	9.77	9.71	12.75	23.47	-10.52	-4.02	8.93	29.47	-20.54	
5280	56	AVG	52T	9.66	9.78	12.73	9.05	9.08	12.08	9.93	9.91	12.93	23.47	-10.54	-4.02	8.91	29.47	-20.56	
5320	64	AVG	52T	9.89	9.77	12.84	9.11	9.03	12.08	9.82	9.81	12.83	23.47	-10.63	-4.02	8.82	29.47	-20.65	
5500	100	AVG	52T	10.15	9.75	12.96	9.39	8.65	12.05	10.08	9.66	12.89	22.80	-9.84	-5.09	7.88	28.80	-20.92	
5600	120	AVG	52T	10.19	9.70	12.96	9.41	8.77	12.11	10.21	9.64	12.94	22.80	-9.84	-5.09	7.87	28.80	-20.93	
5720	144	AVG	52T	9.22	9.19	12.22	9.28	9.12	12.21	9.26	9.03	12.16	22.80	-10.58	-3.49	8.73	28.80	-20.07	
5745	149	AVG	52T	8.79	9.80	12.33	8.63	9.63	12.17	8.70	9.59	12.18	30.00	-17.67	-3.49	8.85	-	-	
5785	157	AVG	52T	8.61	9.70	12.20	8.88	9.81	12.38	8.38	9.63	12.06	30.00	-17.62	-3.49	8.89	-	-	
5825	165	AVG	52T	8.34	9.69	12.08	8.47	9.68	12.13	9.25	10.45	12.90	30.00	-17.10	-3.47	9.43	-	-	

Table 7-39. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37			40			44								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5190	38	AVG	52T	9.11	9.00	12.07	9.05	9.10	12.09	9.26	9.56	12.43	23.98	-11.55	-4.29	8.14	22.39	-14.25	
5230	46	AVG	52T	9.21	9.24	12.24	9.21	9.11	12.17	9.49	9.72	12.62	23.98	-11.36	-4.02	8.60	22.39	-13.79	
5270	54	AVG	52T	9.14	9.16	12.16	9.13	9.06	12.11	9.23	9.31	12.28	23.47	-11.19	-4.02	8.26	29.47	-21.21	
5310	62	AVG	52T	9.27	9.36	12.33	9.24	9.19	12.23	9.22	10.06	12.67	23.47	-10.80	-4.02	8.65	29.47	-20.82	
5510	102	AVG	52T	9.62	9.26	12.45	9.61	8.84	12.25	9.83	9.28	12.57	22.80	-10.23	-5.09	7.49	28.80	-21.31	
5590	118	AVG	52T	9.69	9.22	12.47	9.49	8.83	12.18	9.65	9.12	12.40	22.80	-10.33	-5.09	7.38	28.80	-21.42	
5710	142	AVG	52T	9.71	9.43	12.58	9.54	9.11	12.34	9.74	9.56	12.66	22.80	-10.14	-3.49	9.17	28.80	-19.63	
5755	151	AVG	52T	9.46	10.05	12.78	9.25	9.84	12.57	9.36	10.07	12.74	30.00	-17.22	-3.49	9.29	-	-	
5795	159	AVG	52T	8.81	9.88	12.39	8.99	10.12	12.60	8.53	9.87	12.26	30.00	-17.40	-3.47	9.13	-	-	

Table 7-40. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37			44			52								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5210	42	AVG	52T	9.00	9.01	12.02	9.37	9.58	12.49	9.16	9.39	12.29	23.98	-11.49	-4.29	8.20	22.39	-14.19	
5290	58	AVG	52T	9.31	9.07	12.20	9.33	9.41	12.38	9.01	9.07	12.05	23.47	-11.09	-4.02	8.36	29.47	-21.11	
5530	106	AVG	52T	9.36	9.05	12.22	9.77	9.24	12.52	9.48	8.94	12.23	22.80	-10.28	-5.09	7.44	28.80	-21.36	
5610	122	AVG	52T	9.28	9.04	12.17	9.86	9.24	12.57	9.47	9.04	12.27	22.80	-10.23	-5.09	7.48	28.80	-21.32	
5690	138	AVG	52T	9.56	9.17	12.38	9.76	9.26	12.53	9.43	9.15	12.30	22.80	-10.27	-3.49	9.04	28.80	-19.76	
5775	155	AVG	52T	8.96	9.85	12.44	9.25	10.08	12.70	8.88	9.91	12.44	30.00	-17.30	-3.47	9.23	-	-	

Table 7-41. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 63 of 270

MIMO Conducted Output Power Measurements (106 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53			54								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5180	36	AVG	106T	11.45	11.76	14.62	11.70	11.97	14.85	23.98	-9.13	-4.29	10.56	22.39	-11.83	
5200	40	AVG	106T	11.71	11.88	14.81	11.74	11.87	14.82	23.98	-9.16	-4.29	10.53	22.39	-11.86	
5240	48	AVG	106T	11.67	12.04	14.87	11.79	12.08	14.95	23.98	-9.03	-4.02	10.93	22.39	-11.46	
5260	52	AVG	106T	11.56	11.84	14.71	11.61	11.80	14.72	23.47	-8.75	-4.02	10.70	29.47	-18.77	
5280	56	AVG	106T	11.74	11.84	14.80	11.80	11.98	14.90	23.47	-8.57	-4.02	10.88	29.47	-18.59	
5320	64	AVG	106T	11.66	11.84	14.76	12.08	11.87	14.99	23.47	-8.48	-4.02	10.97	29.47	-18.50	
5500	100	AVG	106T	11.94	11.69	14.83	11.86	11.73	14.81	22.80	-7.97	-5.09	9.74	28.80	-19.06	
5600	120	AVG	106T	12.06	11.88	14.98	12.01	11.76	14.90	22.80	-7.82	-5.09	9.89	28.80	-18.91	
5720	144	AVG	106T	11.91	12.03	14.98	11.93	11.99	14.97	22.80	-7.82	-3.49	11.49	28.80	-17.31	
5745	149	AVG	106T	10.69	11.80	14.29	10.64	11.51	14.11	30.00	-15.71	-3.49	10.80	-	-	
5785	157	AVG	106T	10.59	11.67	14.17	10.63	11.59	14.15	30.00	-15.83	-3.49	10.69	-	-	
5825	165	AVG	106T	10.32	11.60	14.01	10.99	12.41	14.77	30.00	-15.23	-3.47	11.30	-	-	

Table 7-42. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53			54			56								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5190	38	AVG	106T	11.31	11.51	14.42	11.76	11.40	14.59	11.39	11.73	14.57	23.98	-9.39	-4.29	10.30	22.39	-12.09	
5230	46	AVG	106T	11.42	11.48	14.46	11.25	11.28	14.28	11.46	11.89	14.69	23.98	-9.29	-4.02	10.67	22.39	-11.72	
5270	54	AVG	106T	11.39	11.36	14.39	11.07	11.06	14.08	11.43	11.51	14.48	23.47	-8.99	-4.02	10.46	29.47	-19.01	
5310	62	AVG	106T	11.53	11.53	14.54	11.17	11.14	14.16	11.51	11.56	14.55	23.47	-8.92	-4.02	10.53	29.47	-18.94	
5510	102	AVG	106T	11.56	11.27	14.43	11.35	10.92	14.15	11.82	11.57	14.71	22.80	-8.09	-5.09	9.62	28.80	-19.18	
5590	118	AVG	106T	11.64	11.45	14.56	11.15	10.85	14.01	11.56	11.55	14.57	22.80	-8.23	-5.09	9.48	28.80	-19.32	
5710	142	AVG	106T	11.64	11.73	14.70	11.39	11.20	14.31	11.62	11.69	14.67	22.80	-8.10	-3.49	11.21	28.80	-17.59	
5755	151	AVG	106T	11.44	12.31	14.91	11.12	11.79	14.48	11.40	12.19	14.82	30.00	-15.09	-3.49	11.42	-	-	
5795	159	AVG	106T	10.97	12.00	14.53	10.84	11.89	14.41	11.00	12.01	14.54	30.00	-15.46	-3.47	11.08	-	-	

Table 7-43. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53			56			60								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5210	42	AVG	106T	11.02	11.19	14.12	11.49	11.72	14.62	11.17	11.60	14.40	23.98	-9.36	-4.29	10.33	22.39	-12.06	
5290	58	AVG	106T	11.06	11.08	14.08	11.46	11.50	14.49	11.30	11.20	14.26	23.47	-8.98	-4.02	10.47	29.47	-19.00	
5530	106	AVG	106T	11.37	11.23	14.31	11.66	11.50	14.59	11.44	11.23	14.35	22.80	-8.21	-5.09	9.50	28.80	-19.30	
5610	122	AVG	106T	11.34	11.14	14.25	11.82	11.34	14.60	11.48	11.23	14.37	22.80	-8.20	-5.09	9.51	28.80	-19.29	
5690	138	AVG	106T	11.39	11.23	14.32	11.58	11.45	14.53	11.31	11.53	14.43	22.80	-8.27	-3.49	11.04	28.80	-17.76	
5775	155	AVG	106T	11.05	11.91	14.51	11.40	12.05	14.75	10.90	11.98	14.48	30.00	-15.25	-3.47	11.28	-	-	

Table 7-44. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 64 of 270	

MIMO Conducted Output Power Measurements (242 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					61								
					ANT1	ANT2	MIMO						
5180	36	AVG	242T	11.20	11.24	14.23	23.98	-9.75	-4.29	9.94	22.39	-12.45	
5200	40	AVG	242T	14.47	14.74	17.62	23.98	-6.36	-4.29	13.33	22.39	-9.06	
5240	48	AVG	242T	14.49	15.02	17.77	23.98	-6.21	-4.02	13.75	22.39	-8.64	
5260	52	AVG	242T	14.50	14.82	17.67	23.47	-5.80	-4.02	13.65	29.47	-15.82	
5280	56	AVG	242T	14.56	14.77	17.68	23.47	-5.79	-4.02	13.66	29.47	-15.81	
5320	64	AVG	242T	10.66	10.21	13.45	23.47	-10.02	-4.02	9.43	29.47	-20.04	
5500	100	AVG	242T	13.42	13.16	16.30	22.80	-6.50	-5.09	11.21	28.80	-17.59	
5600	120	AVG	242T	14.52	14.65	17.60	22.80	-5.20	-5.09	12.51	28.80	-16.29	
5720	144	AVG	242T	14.36	15.14	17.78	22.80	-5.02	-3.49	14.29	28.80	-14.51	
5745	149	AVG	242T	14.29	15.28	17.82	30.00	-12.18	-3.49	14.34	-	-	
5785	157	AVG	242T	14.17	15.33	17.80	30.00	-12.20	-3.49	14.31	-	-	
5825	165	AVG	242T	14.00	15.28	17.70	30.00	-12.30	-3.47	14.23	-	-	

Table 7-45. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					61			62								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5190	38	AVG	242T	13.63	13.84	16.75	13.52	14.07	16.81	23.98	-7.17	-4.29	12.52	22.39	-9.87	
5230	46	AVG	242T	13.74	13.83	16.80	13.68	14.17	16.94	23.98	-7.04	-4.02	12.92	22.39	-9.47	
5270	54	AVG	242T	13.48	13.57	16.54	13.58	13.78	16.69	23.47	-6.78	-4.02	12.67	29.47	-16.80	
5310	62	AVG	242T	13.53	13.90	16.73	13.52	13.78	16.66	23.47	-6.74	-4.02	12.71	29.47	-16.76	
5510	102	AVG	242T	13.60	13.66	16.64	13.98	13.71	16.86	22.80	-5.94	-5.09	11.77	28.80	-17.03	
5590	118	AVG	242T	13.72	13.48	16.61	13.72	13.74	16.74	22.80	-6.06	-5.09	11.65	28.80	-17.15	
5710	142	AVG	242T	13.70	13.60	16.66	13.65	13.88	16.78	22.80	-6.02	-3.49	13.29	28.80	-15.51	
5755	151	AVG	242T	13.36	14.16	16.79	13.45	14.19	16.85	30.00	-13.15	-3.49	13.36	-	-	
5795	159	AVG	242T	13.09	14.20	16.69	13.21	14.25	16.77	30.00	-13.23	-3.47	13.30	-	-	

Table 7-46. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index												Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					61			62			64											
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO									
5210	42	AVG	242T	12.40	12.53	15.48	12.64	12.92	15.79	12.40	12.83	15.63	23.98	-8.19	-4.29	11.50	22.39	-10.89				
5290	58	AVG	242T	12.39	12.36	15.39	12.68	12.79	15.75	12.39	12.43	15.42	23.47	-7.72	-4.02	11.73	29.47	-17.74				
5530	106	AVG	242T	12.57	12.31	15.45	12.83	12.58	15.72	12.66	12.58	15.63	22.80	-7.08	-5.09	10.63	28.80	-18.17				
5610	122	AVG	242T	12.57	12.32	15.46	12.79	12.64	15.73	12.52	12.61	15.58	22.80	-7.07	-5.09	10.64	28.80	-18.16				
5690	138	AVG	242T	12.63	12.32	15.49	12.78	12.56	15.68	12.55	12.65	15.61	22.80	-7.12	-3.49	12.19	28.80	-16.61				
5775	155	AVG	242T	12.21	12.94	15.60	12.41	13.33	15.90	12.04	13.14	15.64	30.00	-14.10	-3.47	12.44	-	-				

Table 7-47. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset			Page 65 of 270

MIMO Conducted Output Power Measurements (484 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					65								
					ANT1	ANT2	MIMO						
	5190	38	AVG	484T	8.86	9.12	12.00	23.98	-11.98	-4.29	7.71	22.39	-14.68
	5230	46	AVG	484T	13.38	13.65	16.53	23.98	-7.45	-4.02	12.51	22.39	-9.88
	5270	54	AVG	484T	13.49	13.78	16.65	23.47	-6.82	-4.02	12.63	29.47	-16.84
	5310	62	AVG	484T	9.08	8.89	12.00	23.47	-11.47	-4.02	7.98	29.47	-21.49
	5510	102	AVG	484T	10.49	9.84	13.19	22.80	-9.61	-5.09	8.10	28.80	-20.70
	5590	118	AVG	484T	13.53	13.49	16.52	22.80	-6.28	-5.09	11.43	28.80	-17.37
	5710	142	AVG	484T	13.52	13.60	16.57	22.80	-6.23	-3.49	13.08	28.80	-15.72
	5755	151	AVG	484T	13.13	14.14	16.67	30.00	-13.33	-3.49	13.19	-	-
	5795	159	AVG	484T	12.86	14.14	16.56	30.00	-13.44	-3.47	13.09	-	-

Table 7-48. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					65			66								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
	5210	42	AVG	484T	10.96	10.99	13.99	10.95	10.98	13.98	23.98	-9.99	-4.29	9.70	22.39	-12.69
	5290	58	AVG	484T	10.92	10.89	13.92	10.92	11.01	13.98	23.47	-9.49	-4.02	9.96	29.47	-19.51
	5530	106	AVG	484T	12.39	12.37	15.39	12.68	12.45	15.58	22.80	-7.22	-5.09	10.49	28.80	-18.31
	5610	122	AVG	484T	12.38	12.21	15.31	12.54	12.43	15.50	22.80	-7.30	-5.09	10.41	28.80	-18.39
	5690	138	AVG	484T	12.34	12.36	15.36	12.39	12.49	15.45	22.80	-7.35	-3.49	11.96	28.80	-16.84
	5775	155	AVG	484T	12.02	12.88	15.48	11.87	13.12	15.55	30.00	-14.45	-3.47	12.08	-	-

Table 7-49. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 66 of 270	

MIMO Conducted Output Power Measurements (996 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					67								
					ANT1	ANT2	MIMO						
	5210	42	AVG	996T	9.15	9.01	12.09	23.98	-11.89	-4.29	7.80	22.39	-14.59
	5290	58	AVG	996T	8.91	8.19	11.58	23.47	-11.89	-4.02	7.56	29.47	-21.91
	5530	106	AVG	996T	9.37	9.31	12.35	22.80	-10.45	-5.09	7.26	28.80	-21.54
	5610	122	AVG	996T	12.27	12.66	15.48	22.80	-7.32	-5.09	10.39	28.80	-18.41
	5690	138	AVG	996T	12.21	12.87	15.56	22.80	-7.24	-3.49	12.08	28.80	-16.72
	5775	155	AVG	996T	11.88	13.25	15.63	30.00	-14.37	-3.47	12.16	-	-

Table 7-50. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset			Page 67 of 270



Note:

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

Sample MIMO Calculation:

Assuming the average conducted output power was measured to be 16.45 dBm for Antenna-1 and 15.82 dBm for Antenna-2.

Antenna 1 + Antenna 2 = MIMO

$$(16.45 \text{ dBm} + 15.82 \text{ dBm}) = (44.16 \text{ mW} + 38.19 \text{ mW}) = 82.35 \text{ mW} = 19.16 \text{ dBm}$$

Sample e.i.r.p. Calculation:

Assuming the average MIMO conducted power was calculated to be 19.16 dBm with directional gain of -4.29 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$19.16 \text{ dBm} + -4.29 \text{ dBi} = 14.87 \text{ dBm}$$

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 68 of 270

7.5 Maximum Power Spectral Density – 802.11ax OFDMA
§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
 KDB 789033 D02 v02r01 – Section F
 ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique
 KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times$ (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

The power spectral density for each channel was measured with the RU index showing the highest conducted power

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 69 of 270

SISO Antenna-1 Power Spectral Density Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26T	MCS0	6.80	11.0	-4.21
	5200	40	ax (20MHz)	26T	MCS0	6.73	11.0	-4.27
	5240	48	ax (20MHz)	26T	MCS0	6.76	11.0	-4.25
	5190	38	ax (40MHz)	26T	MCS0	8.17	11.0	-2.83
	5230	46	ax (40MHz)	26T	MCS0	8.73	11.0	-2.27
	5210	42	ax (80MHz)	26T	MCS0	7.34	11.0	-3.66
Band 2A	5260	52	ax (20MHz)	26T	MCS0	7.05	11.0	-3.95
	5280	56	ax (20MHz)	26T	MCS0	6.50	11.0	-4.50
	5320	64	ax (20MHz)	26T	MCS0	6.78	11.0	-4.22
	5270	54	ax (40MHz)	26T	MCS0	7.90	11.0	-3.10
	5310	62	ax (40MHz)	26T	MCS0	8.09	11.0	-2.91
	5290	58	ax (80MHz)	26T	MCS0	7.10	11.0	-3.90
Band 2C	5500	100	ax (20MHz)	26T	MCS0	6.92	11.0	-4.08
	5600	120	ax (20MHz)	26T	MCS0	7.25	11.0	-3.75
	5720	144	ax (20MHz)	26T	MCS0	6.99	11.0	-4.01
	5510	102	ax (40MHz)	26T	MCS0	8.68	11.0	-2.32
	5590	118	ax (40MHz)	26T	MCS0	6.72	11.0	-4.28
	5710	142	ax (40MHz)	26T	MCS0	6.47	11.0	-4.53
	5530	106	ax (80MHz)	26T	MCS0	7.04	11.0	-3.96
	5610	122	ax (80MHz)	26T	MCS0	6.90	11.0	-4.10
	5690	138	ax (80MHz)	26T	MCS0	5.69	11.0	-5.31

Table 7-51. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements SISO ANT1 (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26T	MCS0	6.80	-7.52	-0.73	10.0	-10.73
	5200	40	ax (20MHz)	26T	MCS0	6.73	-7.40	-0.67	10.0	-10.67
	5240	48	ax (20MHz)	26T	MCS0	6.76	-8.60	-1.85	10.0	-11.85
	5190	38	ax (40MHz)	26T	MCS0	8.17	-7.40	0.77	10.0	-9.23
	5230	46	ax (40MHz)	26T	MCS0	8.73	-8.60	0.13	10.0	-9.87
	5210	42	ax (80MHz)	26T	MCS0	7.34	-7.40	-0.06	10.0	-10.06

Table 7-52. Band 1 e.i.r.p. Conducted Power Spectral Density Measurements (ISED 26 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 70 of 270	

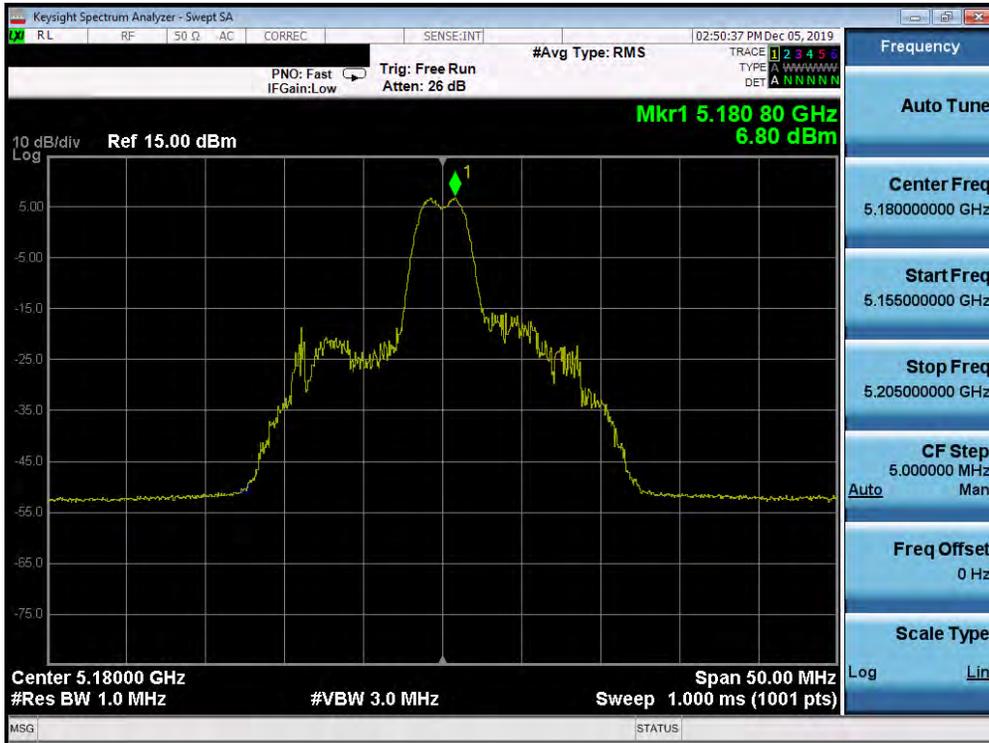


Plot 7-55. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 36)

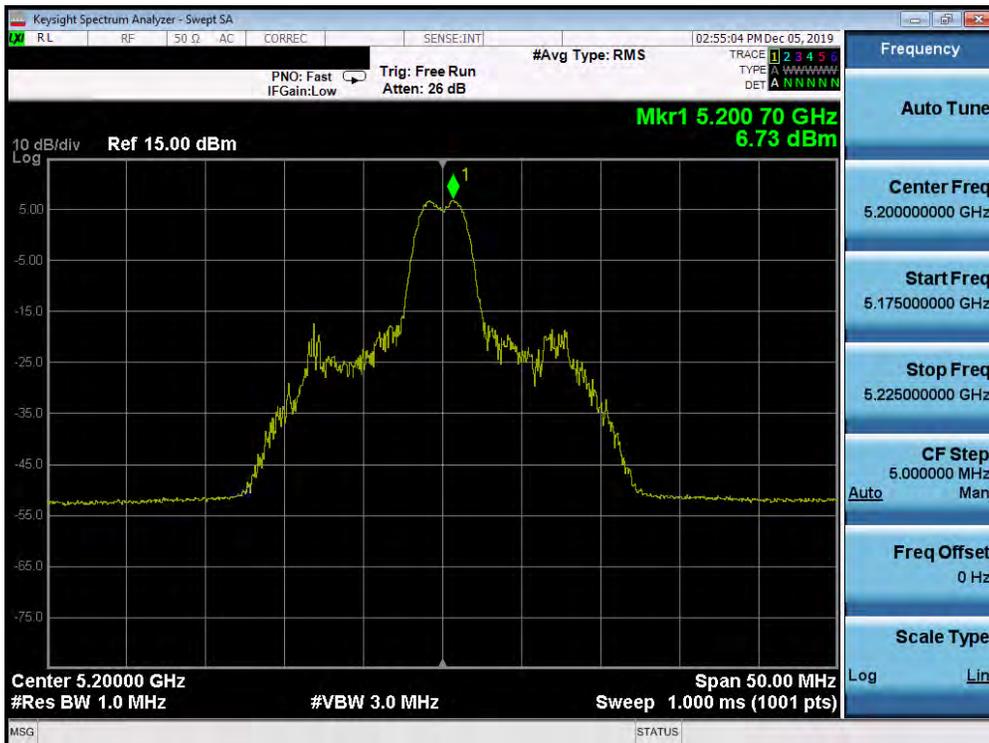


Plot 7-56. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 71 of 270

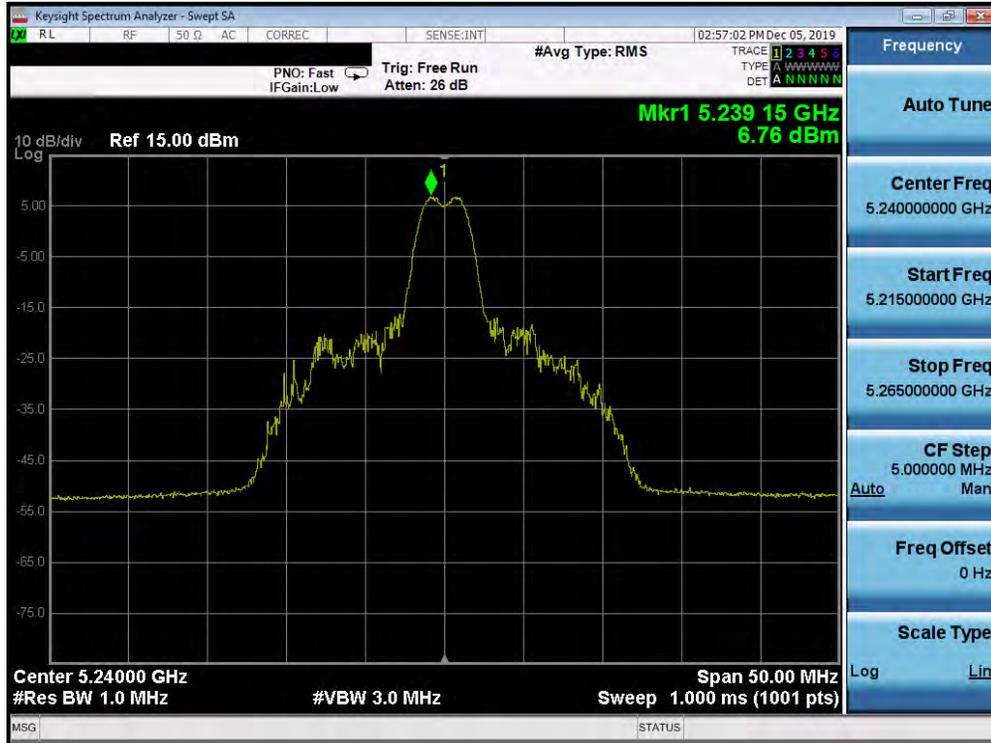


Plot 7-57. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 48)

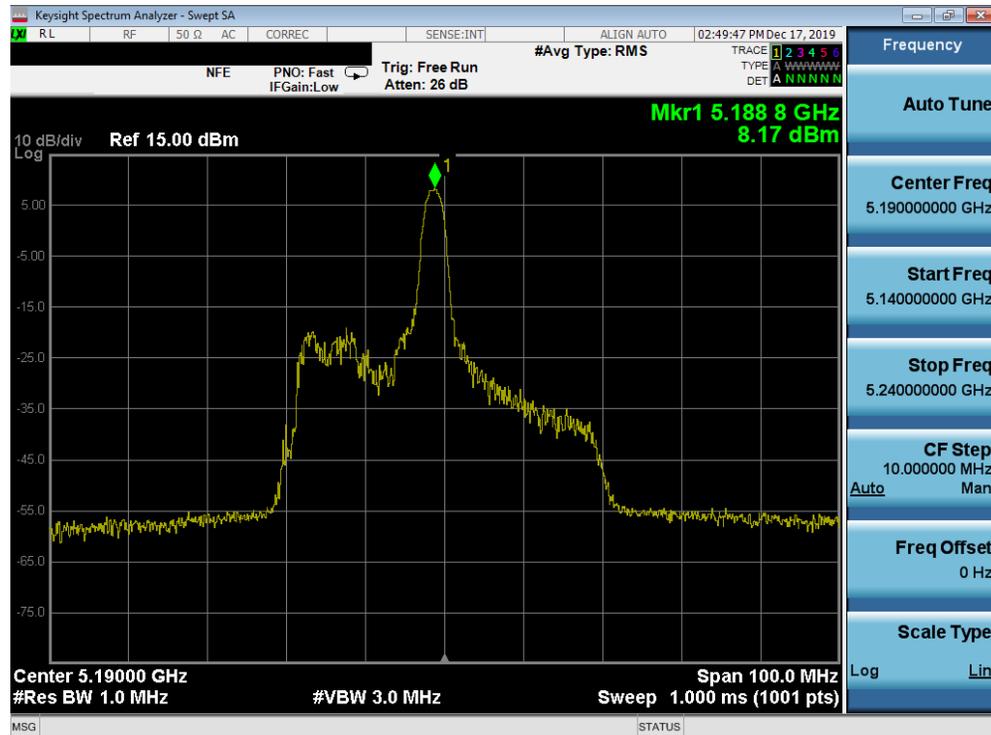

Plot 7-58. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 72 of 270

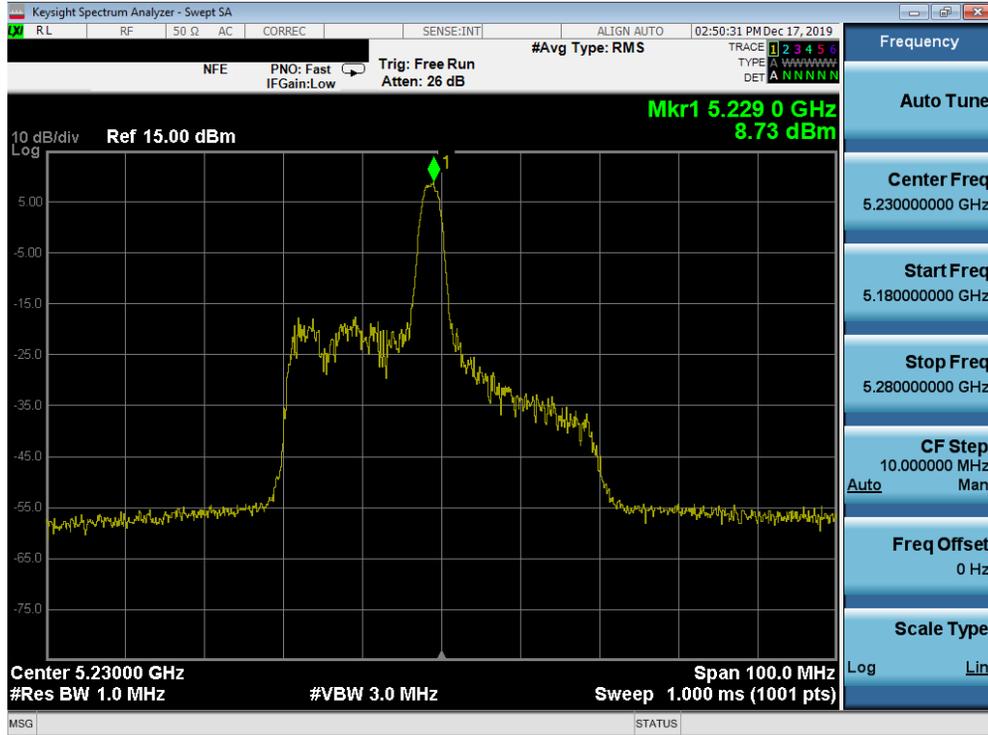


Plot 7-59. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 46)




Plot 7-60. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 73 of 270

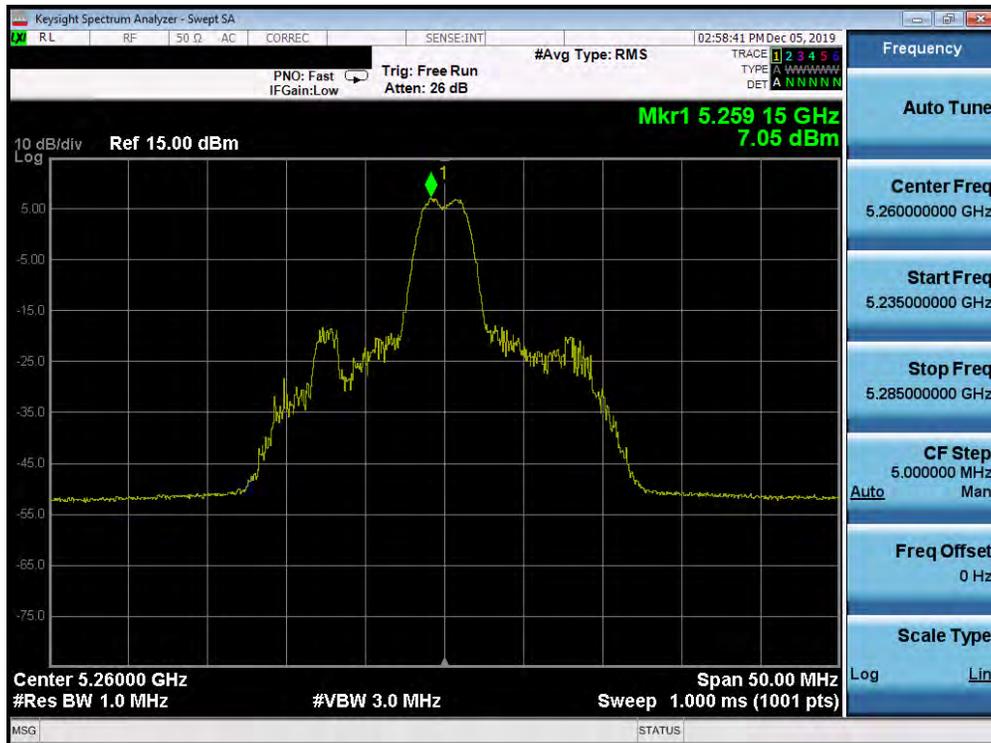


Plot 7-61. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 52)

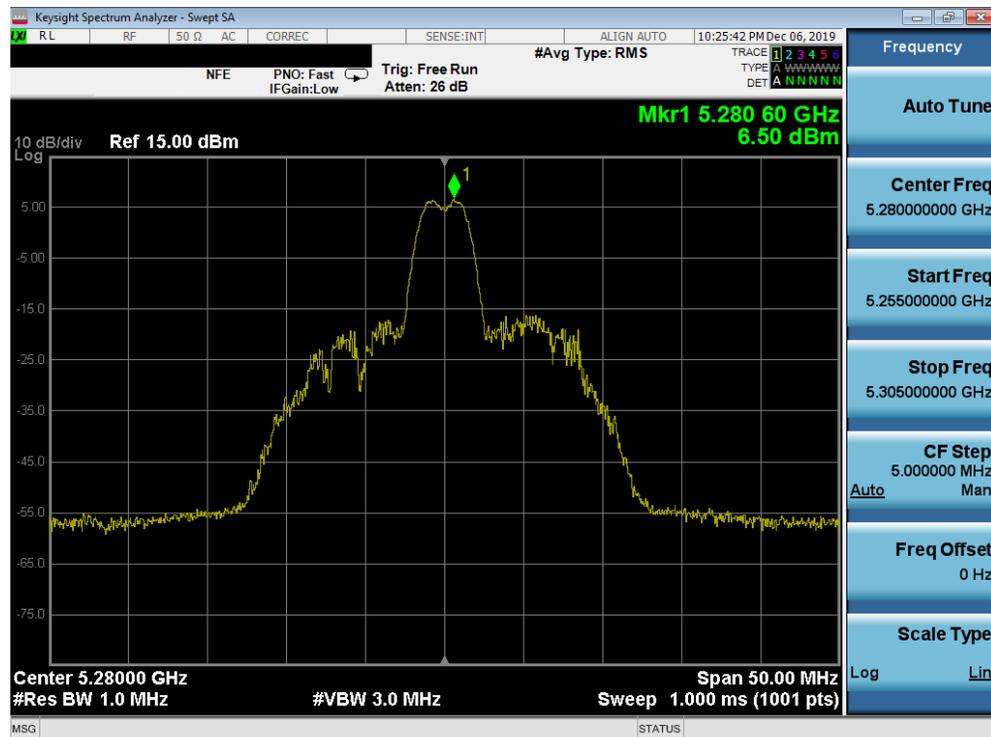

Plot 7-62. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 74 of 270

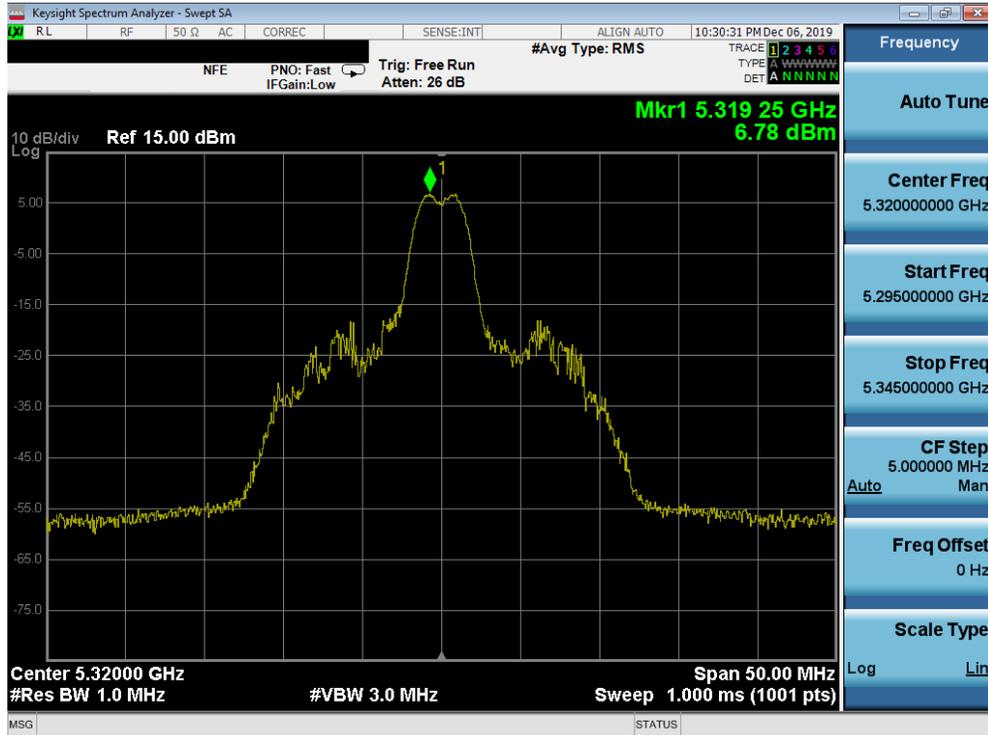


Plot 7-63. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 64)




Plot 7-64. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 75 of 270

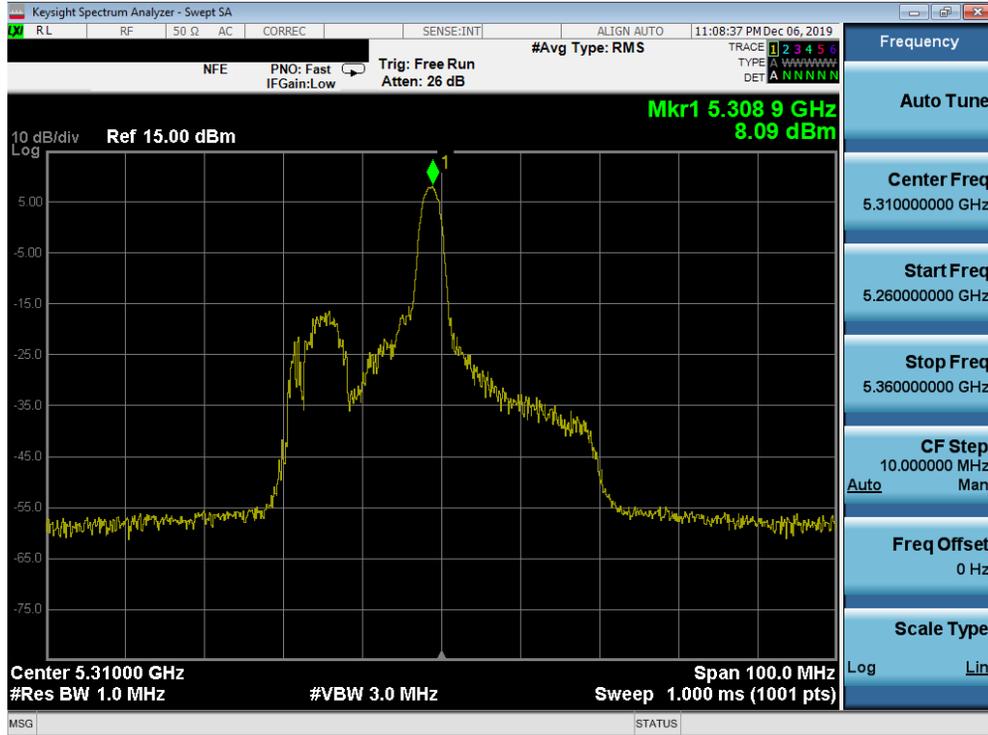


Plot 7-65. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 62)

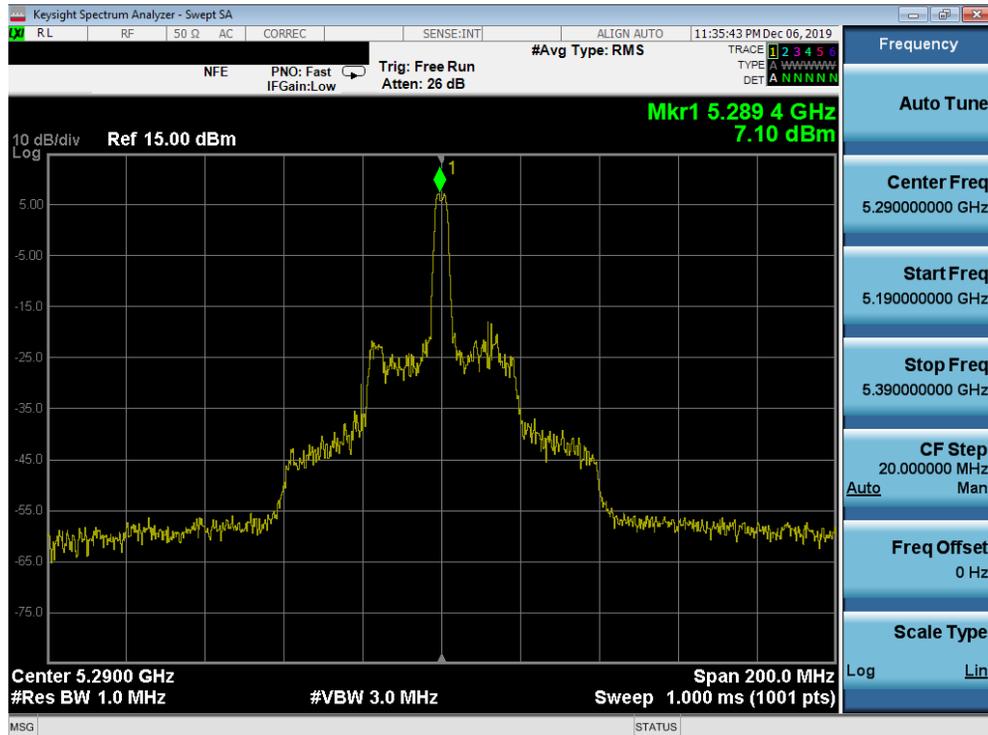


Plot 7-66. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 76 of 270

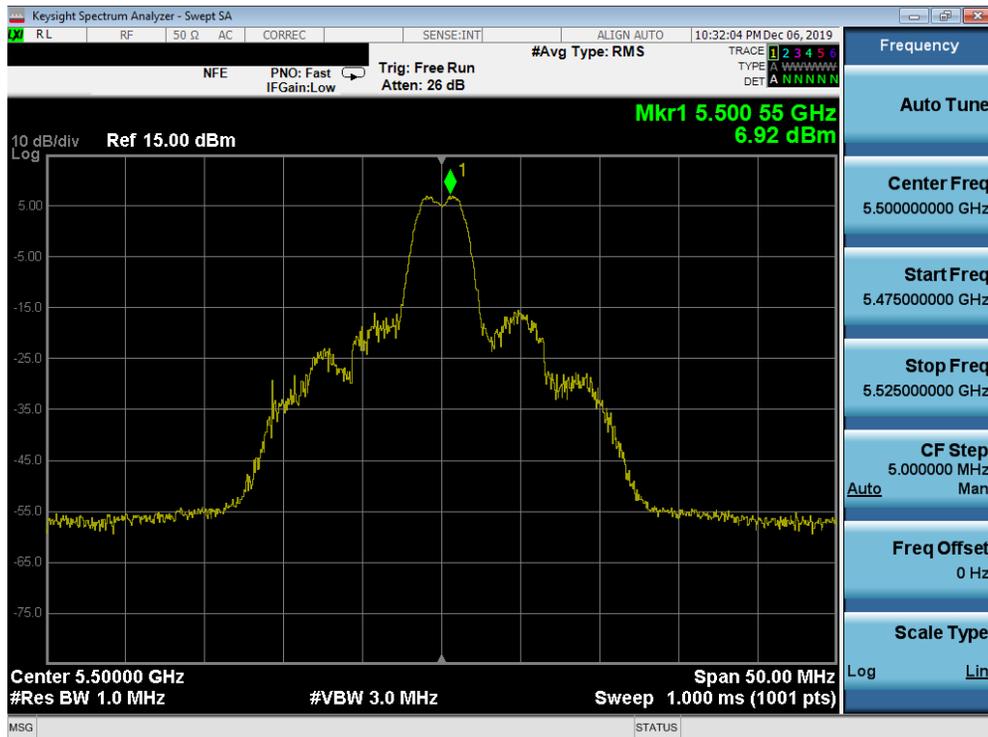


Plot 7-67. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 100)

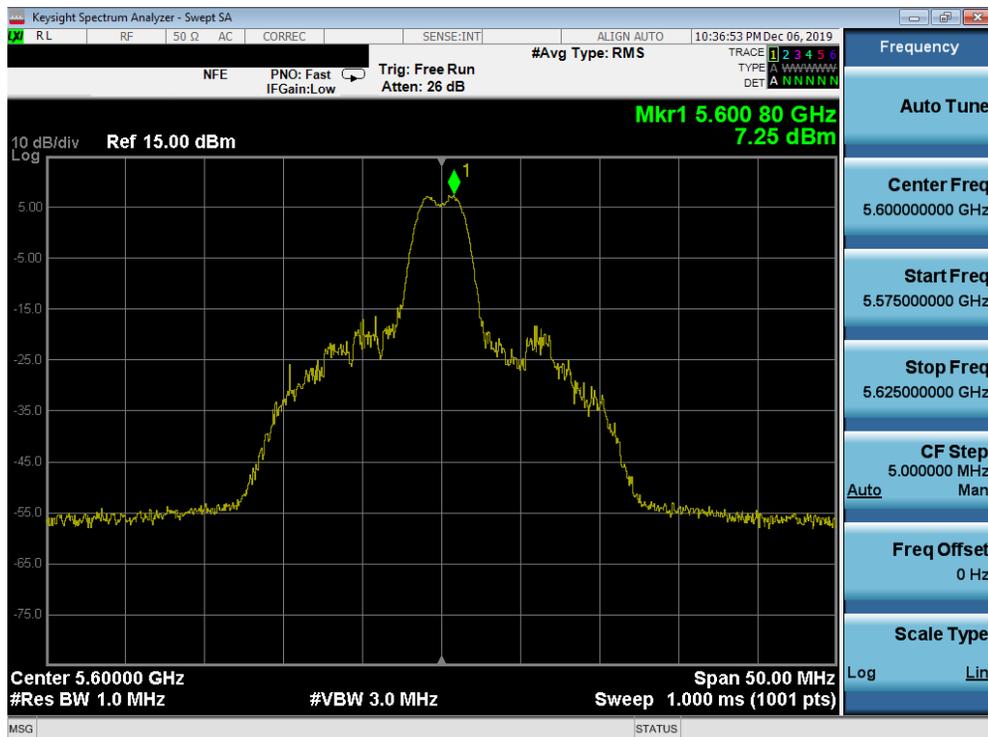

Plot 7-68. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 77 of 270

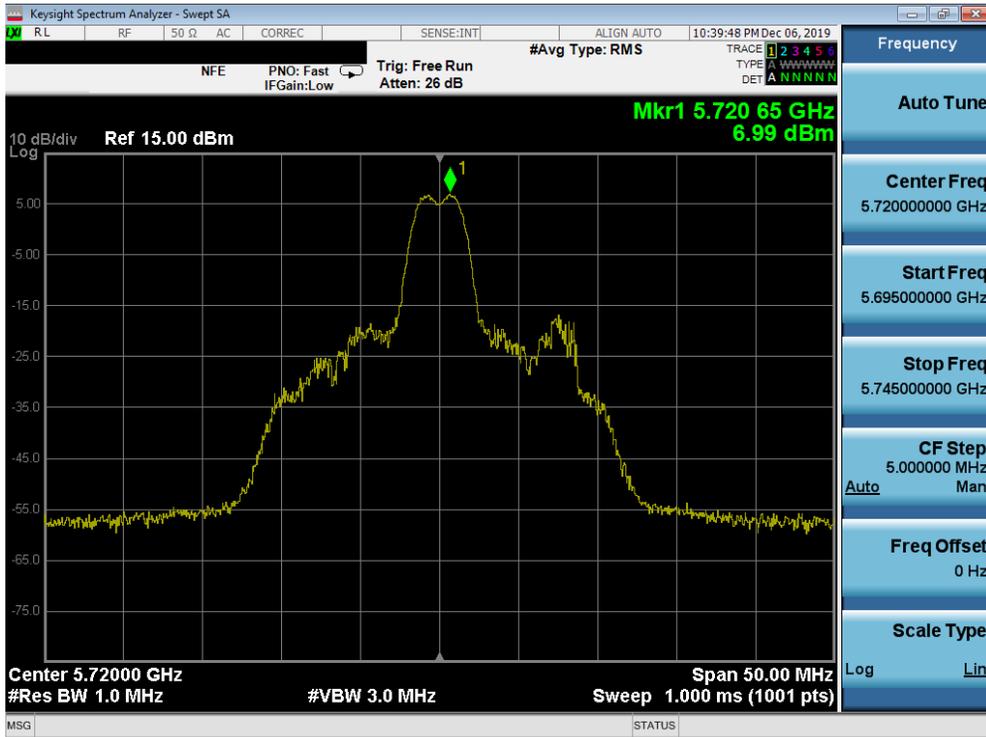


Plot 7-69. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 144)




Plot 7-70. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 78 of 270

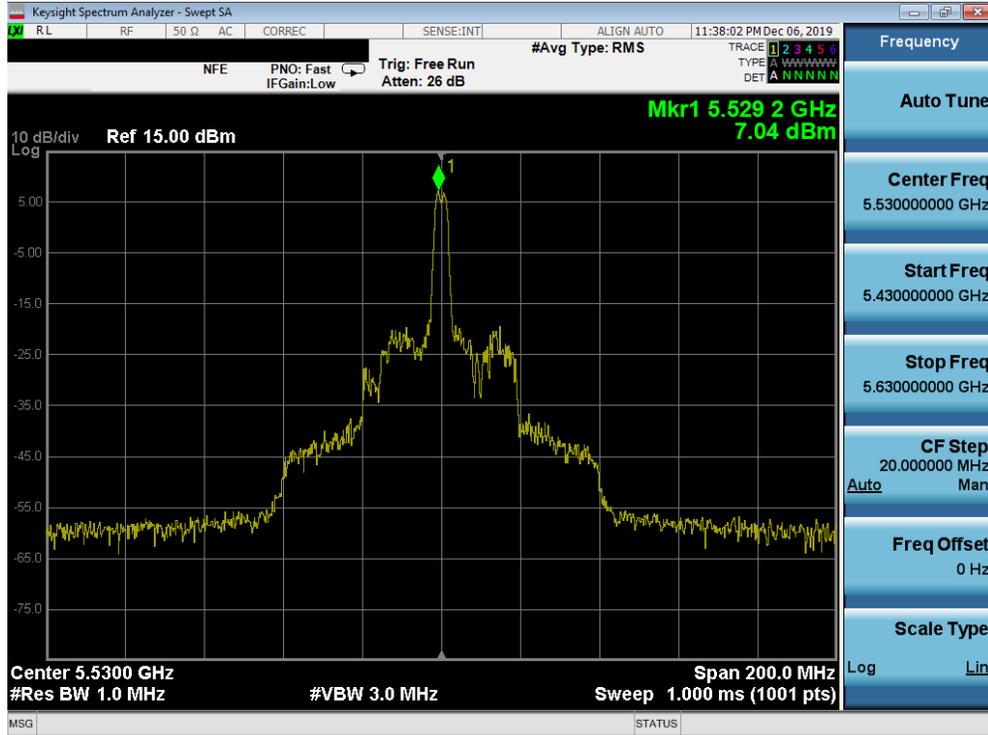

Plot 7-73. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 106)

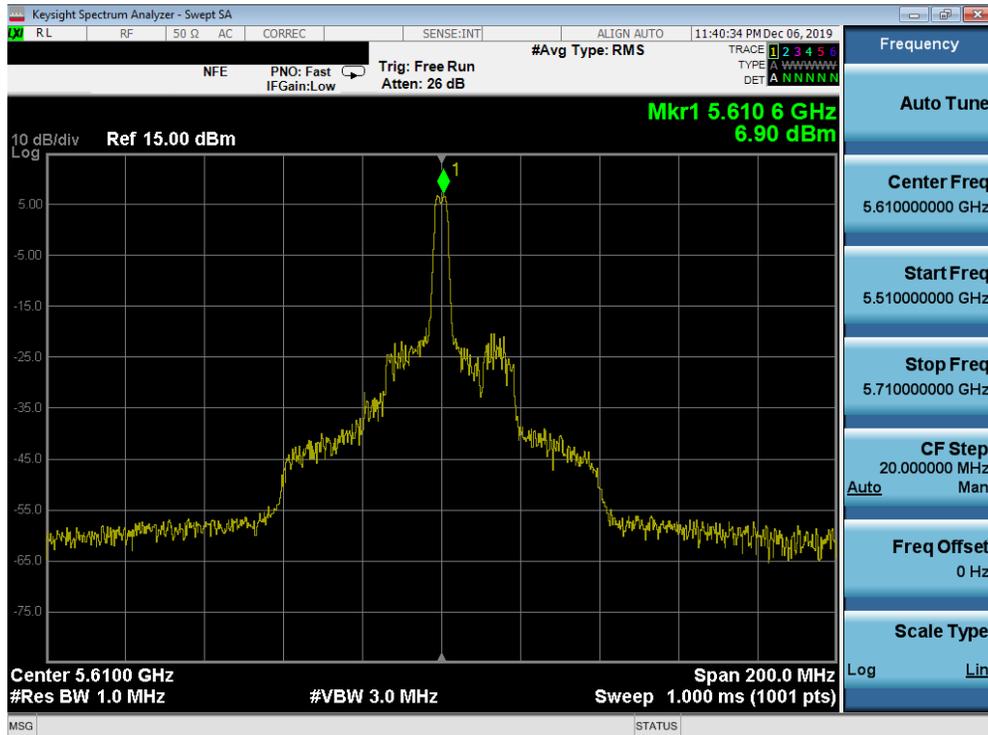

Plot 7-74. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 80 of 270




Plot 7-75. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 81 of 270


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density	Margin [dB]
Band 3	5745	149	ax (20MHz)	26T	MCS0	4.35	30.00	-25.65
	5785	157	ax (20MHz)	26T	MCS0	4.45	30.00	-25.55
	5825	165	ax (20MHz)	26T	MCS0	3.88	30.00	-26.12
	5755	151	ax (40MHz)	26T	MCS0	5.07	30.00	-24.93
	5795	159	ax (40MHz)	26T	MCS0	4.82	30.00	-25.18
	5775	155	ax (80MHz)	26T	MCS0	7.48	30.00	-22.52

Table 7-53. Band 3 Conducted Power Spectral Density Measurements SISO ANT1 (26 Tones)

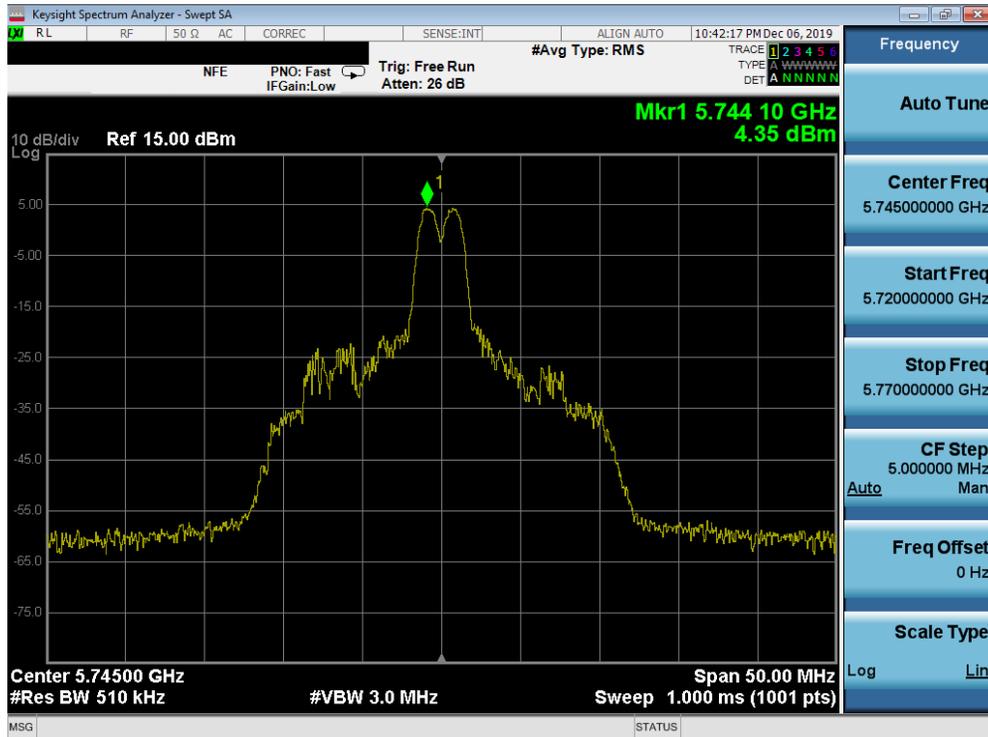


Plot 7-76. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 149)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 82 of 270

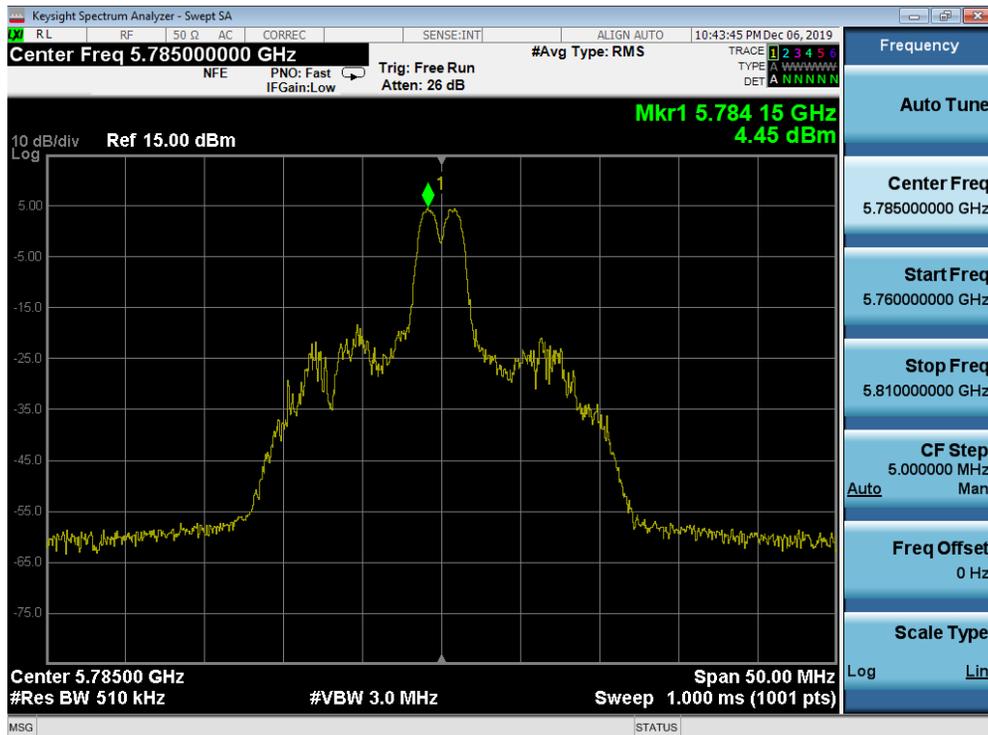


Plot 7-77. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

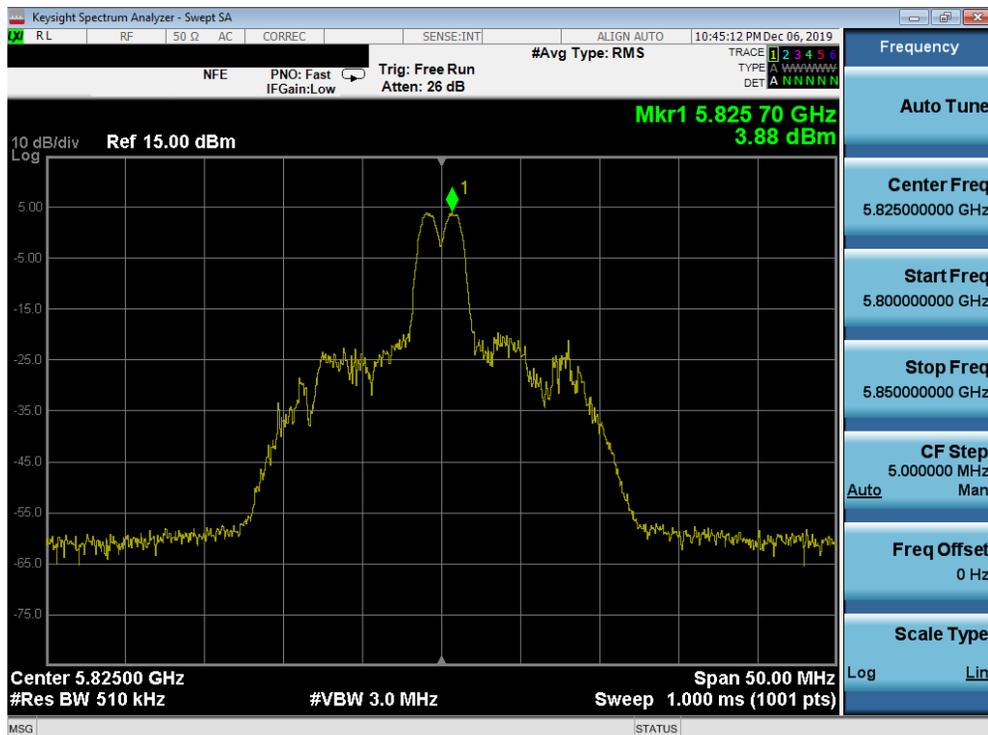


Plot 7-78. Power Spectral Density Plot SISO ANT1 (20 MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 165)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 83 of 270

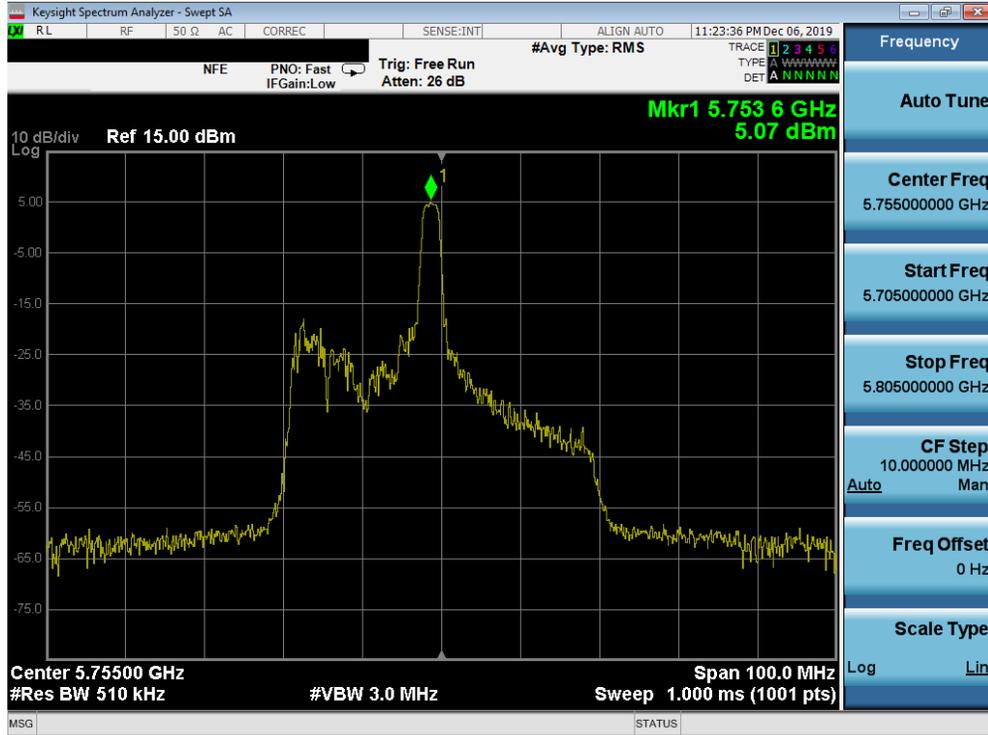


Plot 7-79. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

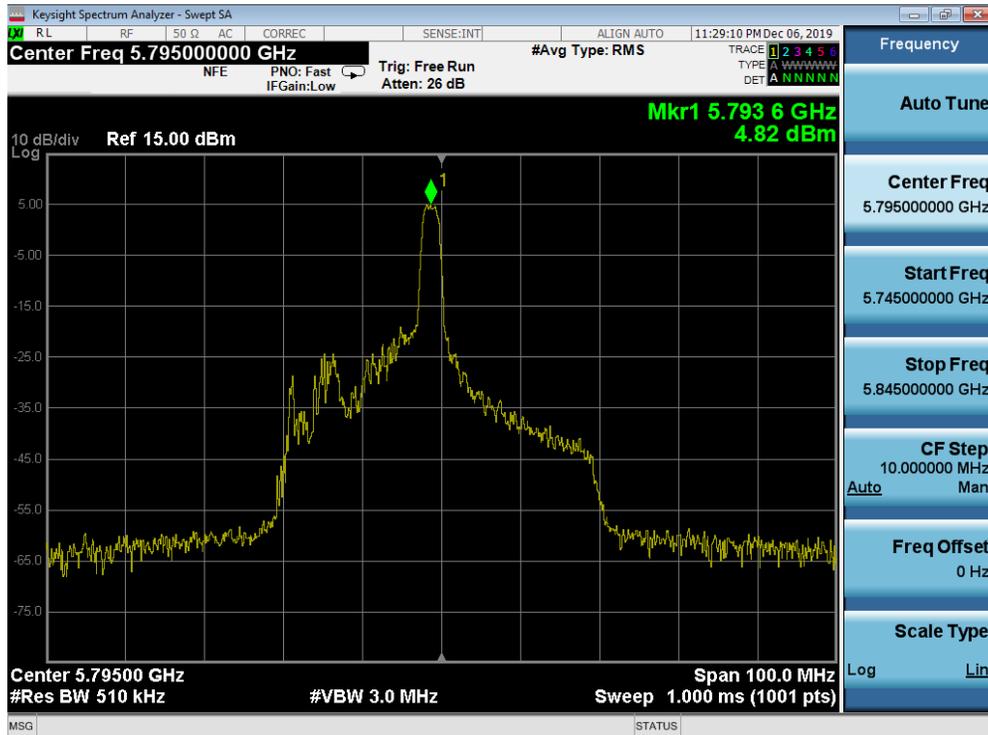

Plot 7-80. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 159)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 84 of 270

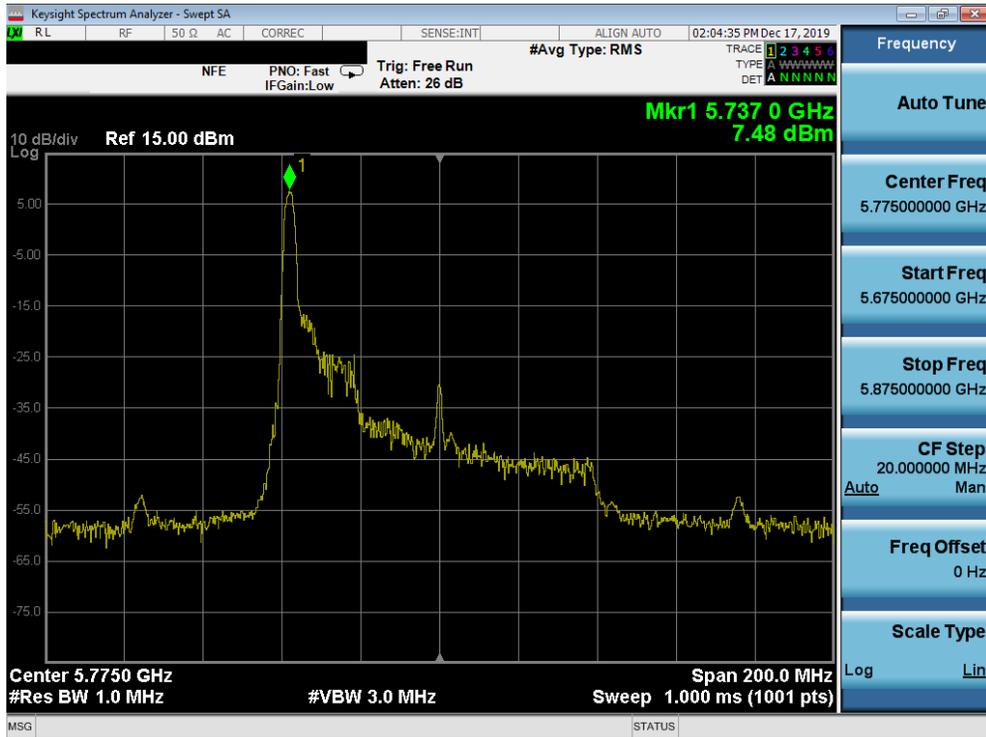

Plot 7-81. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 85 of 270

SISO Antenna-1 Power Spectral Density Measurements (Full Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	242T	MCS0	5.21	11.0	-5.79
	5200	40	ax (20MHz)	242T	MCS0	5.22	11.0	-5.78
	5240	48	ax (20MHz)	242T	MCS0	5.19	11.0	-5.81
	5190	38	ax (40MHz)	484T	MCS0	-5.42	11.0	-16.42
	5230	46	ax (40MHz)	484T	MCS0	0.47	11.0	-10.53
	5210	42	ax (80MHz)	996T	MCS0	-2.45	11.0	-13.45
Band 2A	5260	52	ax (20MHz)	242T	MCS0	4.95	11.0	-6.05
	5280	56	ax (20MHz)	242T	MCS0	4.81	11.0	-6.19
	5320	64	ax (20MHz)	242T	MCS0	4.93	11.0	-6.07
	5270	54	ax (40MHz)	484T	MCS0	0.65	11.0	-10.35
	5310	62	ax (40MHz)	484T	MCS0	-4.86	11.0	-15.86
	5290	58	ax (80MHz)	996T	MCS0	-2.30	11.0	-13.30
Band 2C	5500	100	ax (20MHz)	242T	MCS0	4.66	11.0	-6.34
	5600	120	ax (20MHz)	242T	MCS0	4.95	11.0	-6.05
	5720	144	ax (20MHz)	242T	MCS0	4.74	11.0	-6.26
	5510	102	ax (40MHz)	484T	MCS0	-4.36	11.0	-15.36
	5590	118	ax (40MHz)	484T	MCS0	0.66	11.0	-10.34
	5710	142	ax (40MHz)	484T	MCS0	-0.02	11.0	-11.02
	5530	106	ax (80MHz)	996T	MCS0	-2.19	11.0	-13.19
	5610	122	ax (80MHz)	996T	MCS0	-2.43	11.0	-13.43
	5690	138	ax (80MHz)	996T	MCS0	-5.20	11.0	-16.20

Table 7-54. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements SISO ANT1 (Full Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	242T	MCS0	5.21	-7.52	-2.31	10.0	-12.31
	5200	40	ax (20MHz)	242T	MCS0	5.22	-7.40	-2.18	10.0	-12.18
	5240	48	ax (20MHz)	242T	MCS0	5.19	-8.60	-3.41	10.0	-13.41
	5190	38	ax (40MHz)	484T	MCS0	-5.42	-7.40	-12.82	10.0	-22.82
	5230	46	ax (40MHz)	484T	MCS0	0.47	-8.60	-8.13	10.0	-18.13
	5210	42	ax (80MHz)	996T	MCS0	-2.45	-7.40	-9.85	10.0	-19.85

Table 7-55. Band 1 e.i.r.p. Conducted Power Spectral Density Measurements (ISED Full Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 86 of 270	

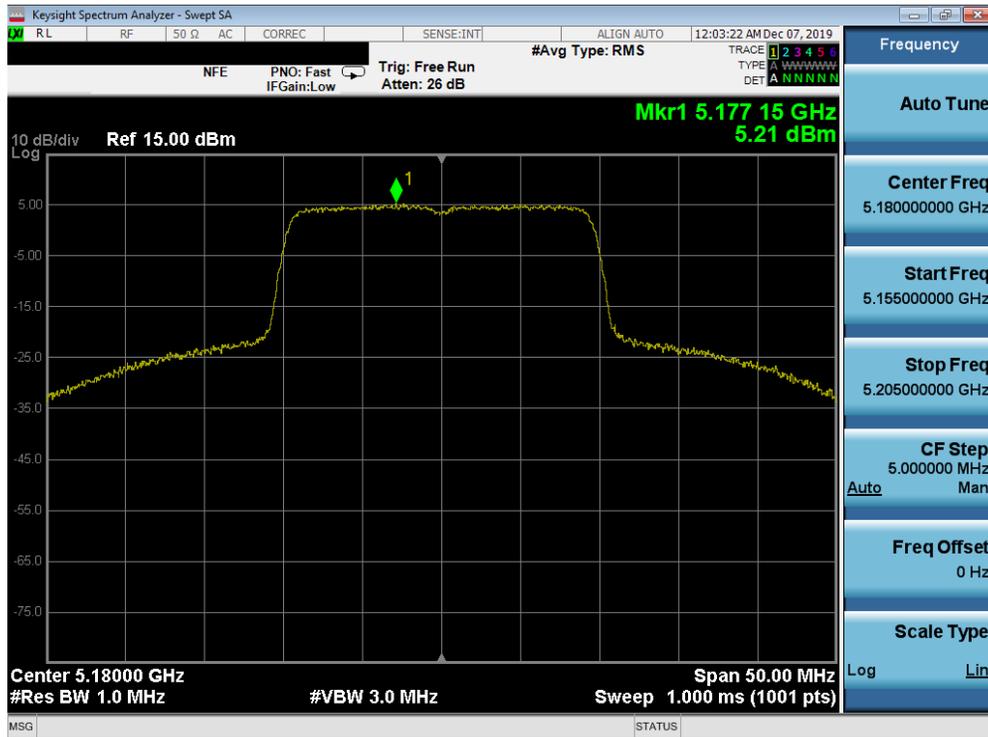


Plot 7-82. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 1) – Ch. 36)

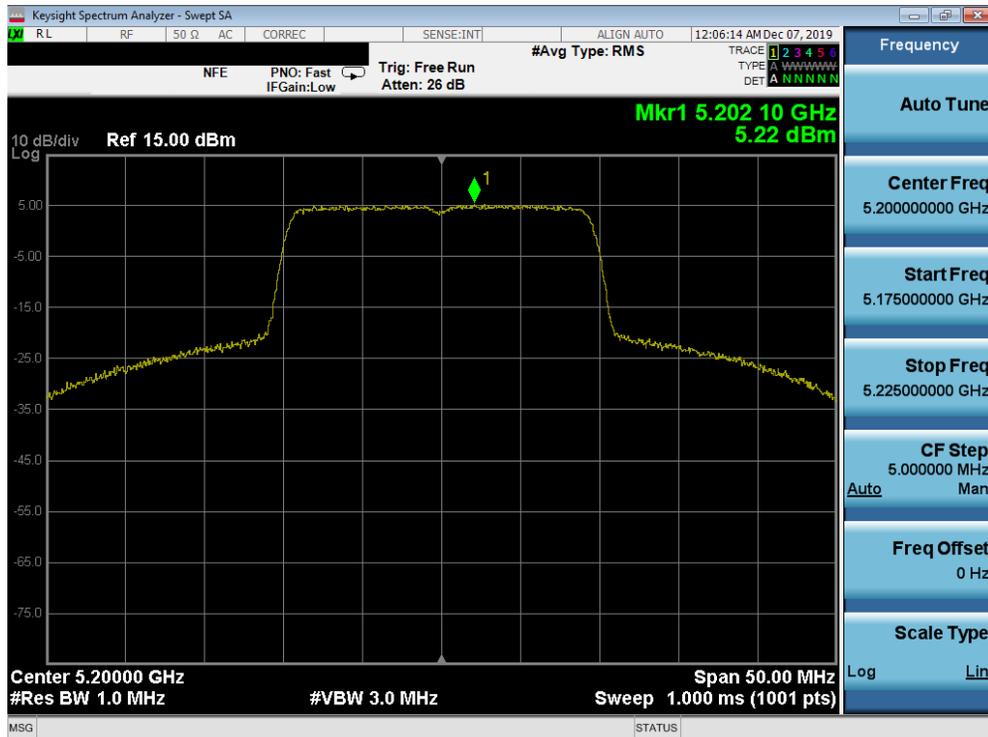


Plot 7-83. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 87 of 270

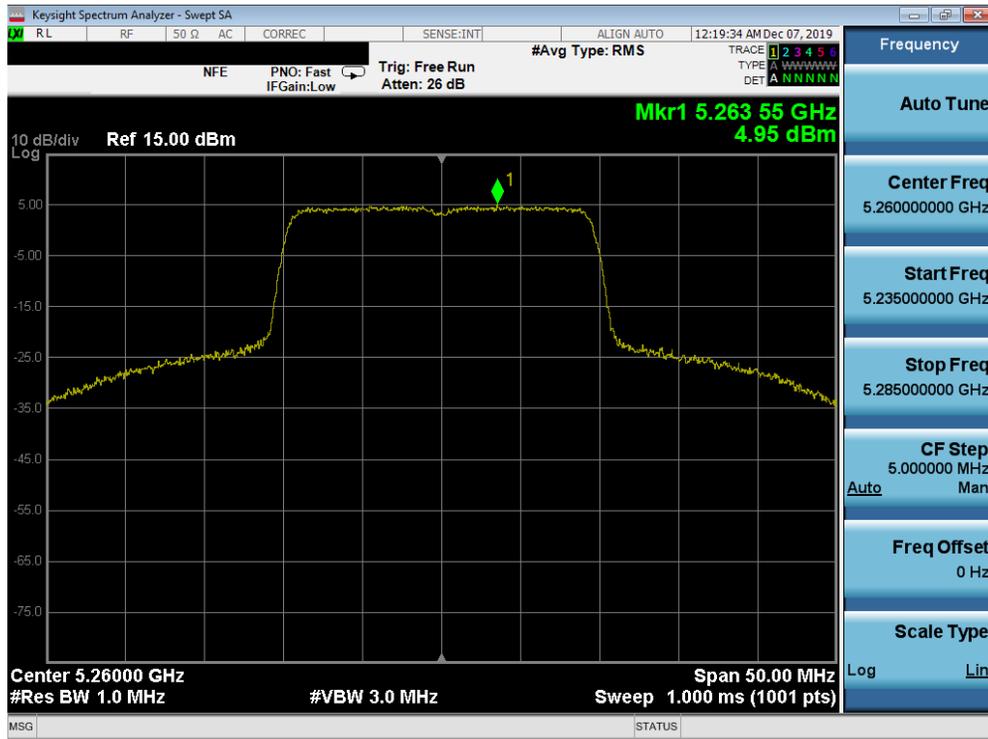


Plot 7-88. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 52)

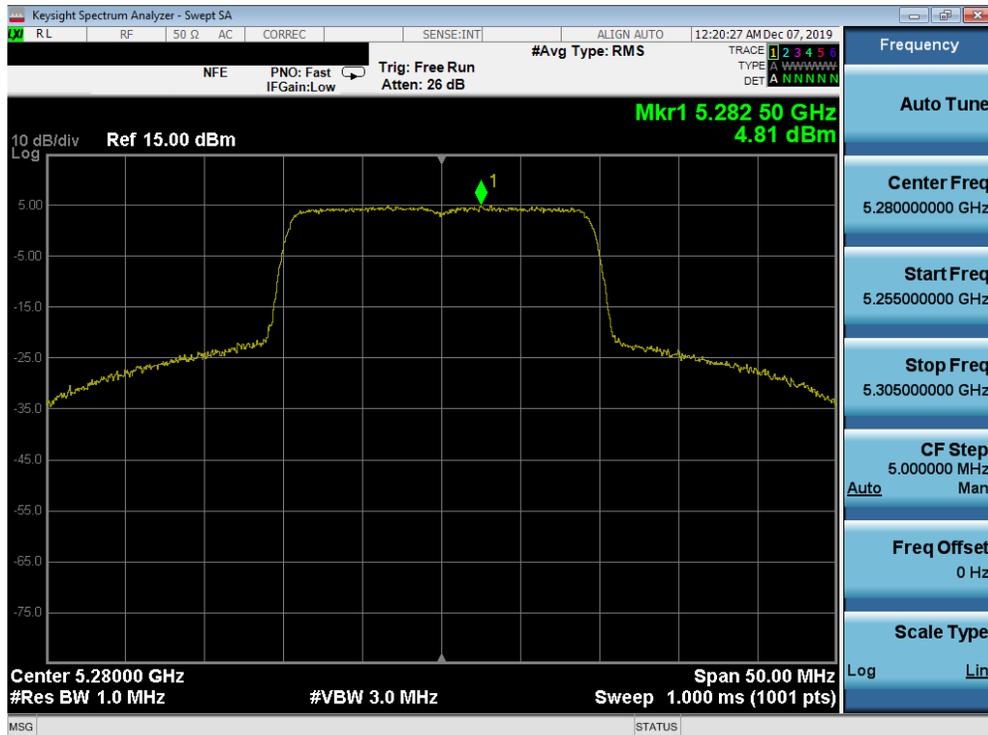

Plot 7-89. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 90 of 270

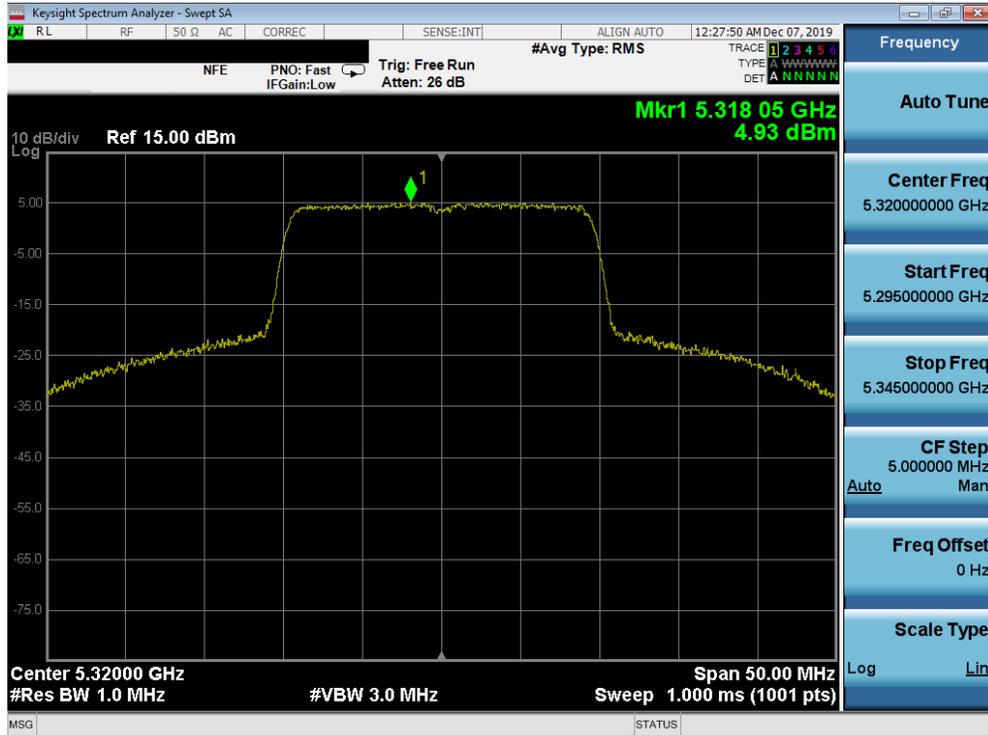


Plot 7-90. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 64)




Plot 7-91. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 91 of 270

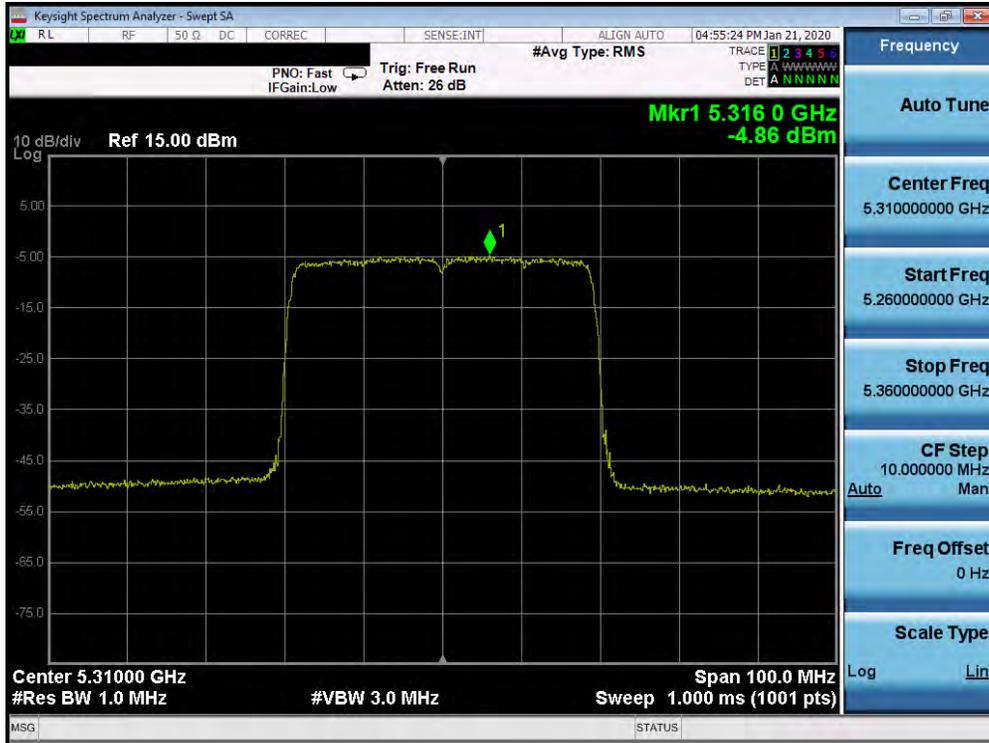


Plot 7-92. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 62)

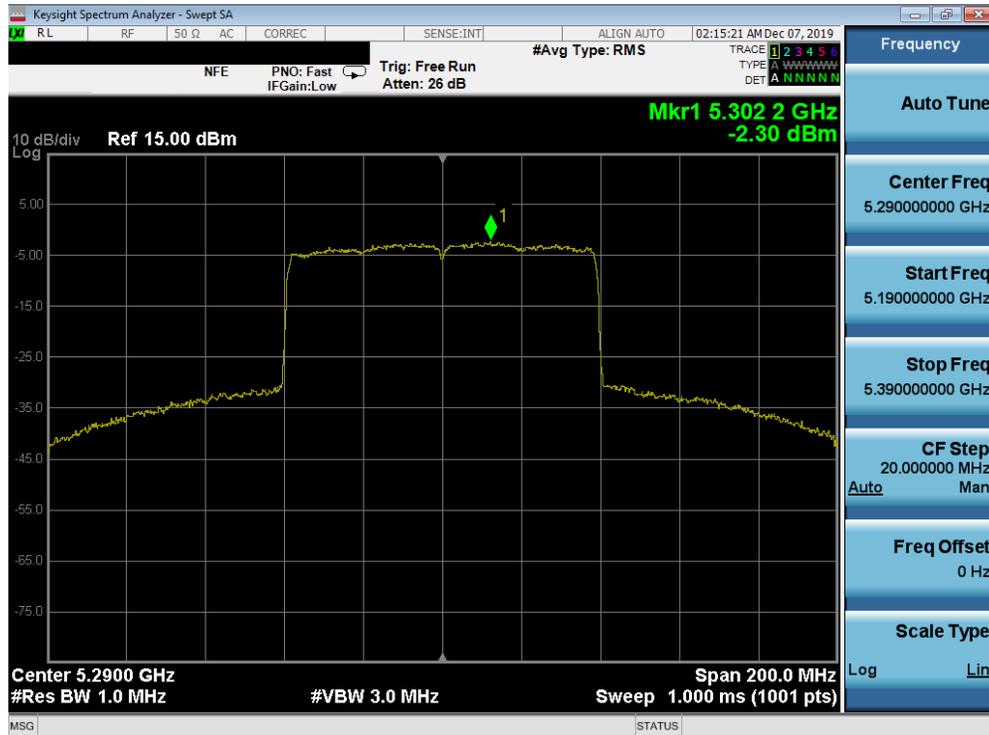


Plot 7-93. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – Full Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 92 of 270

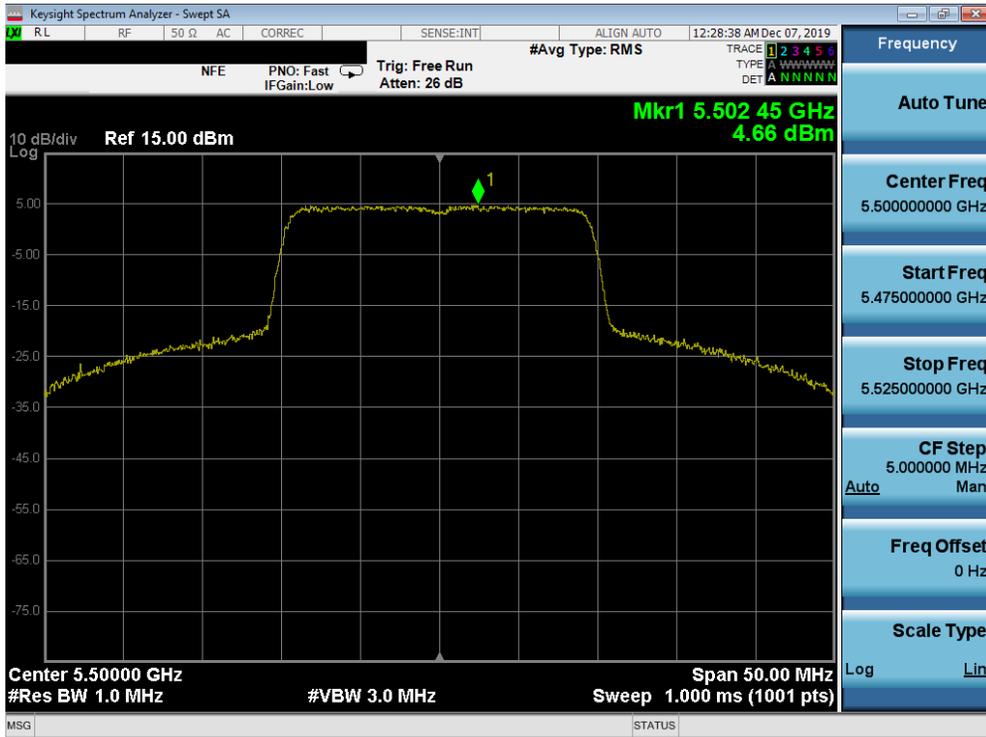


Plot 7-94. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 100)

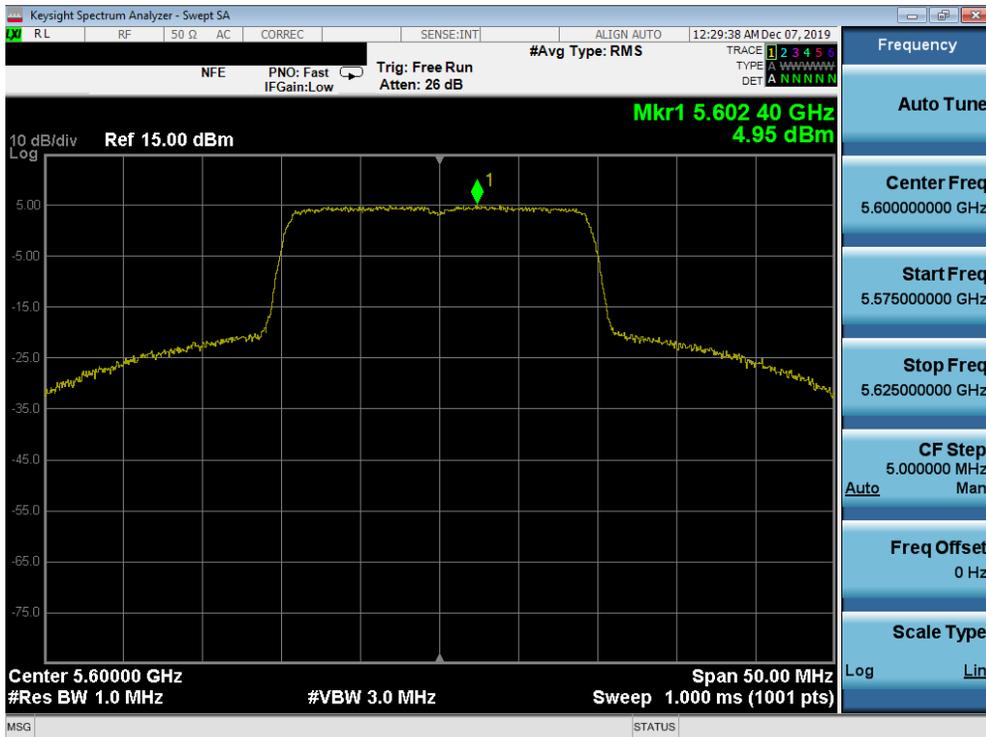


Plot 7-95. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 93 of 270

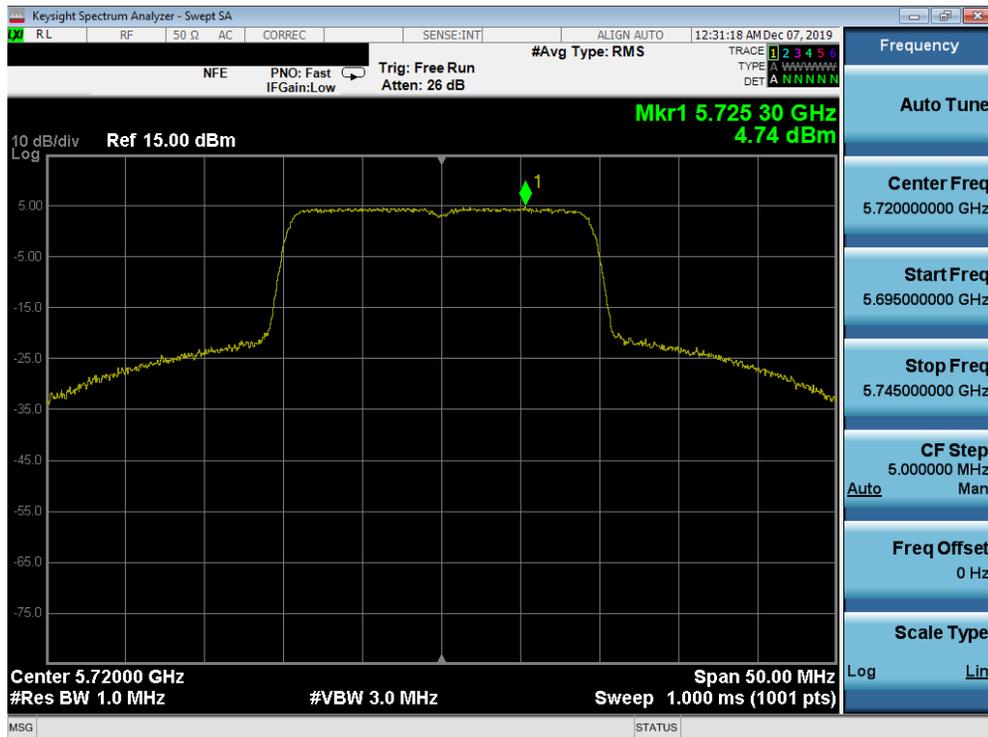


Plot 7-96. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 144)

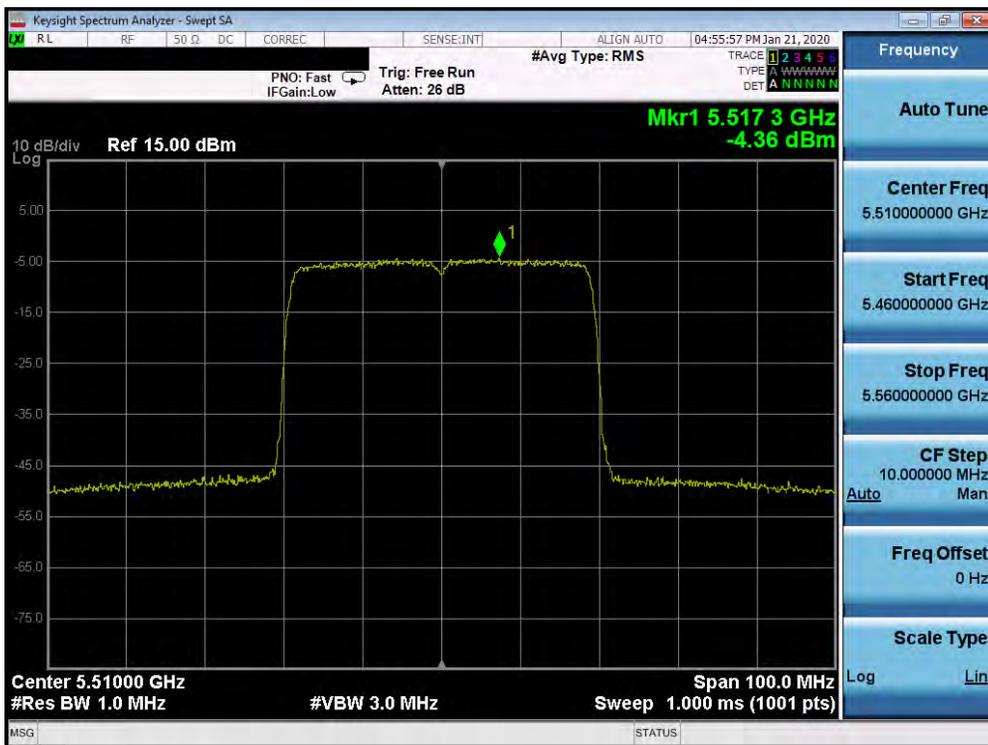


Plot 7-97. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 94 of 270

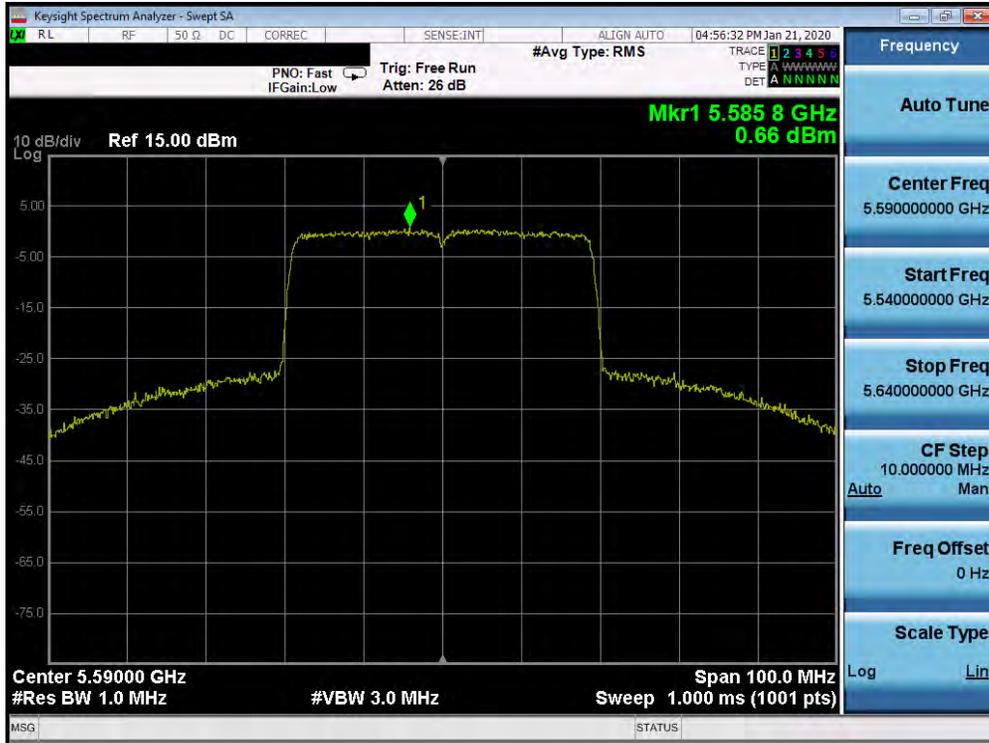


Plot 7-98. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 118)

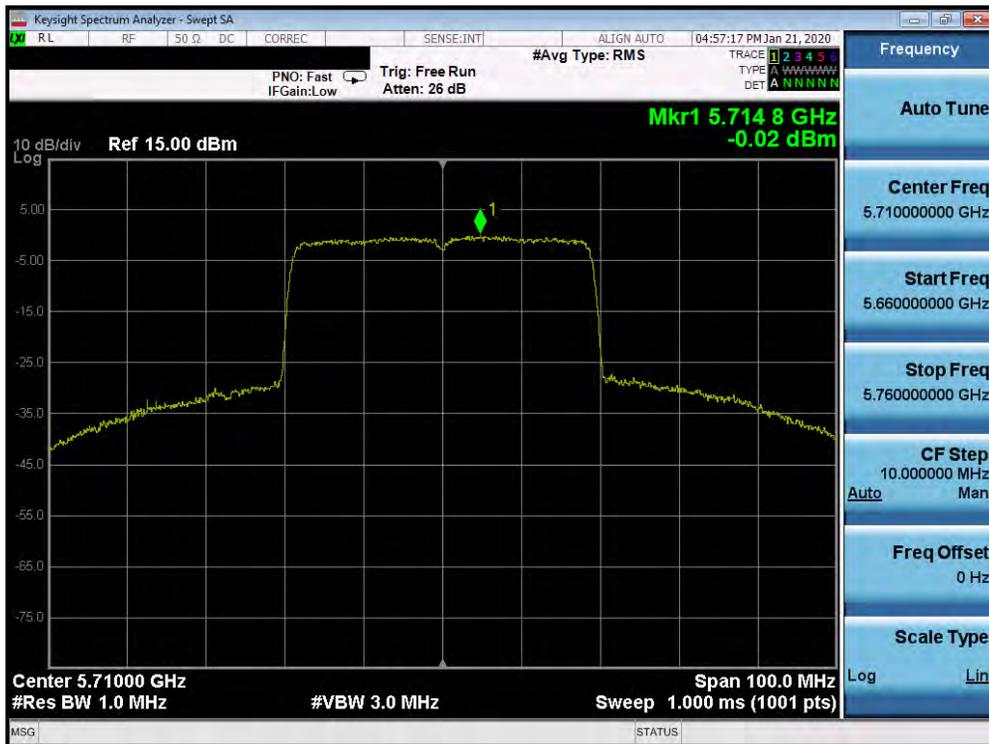


Plot 7-99. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 95 of 270

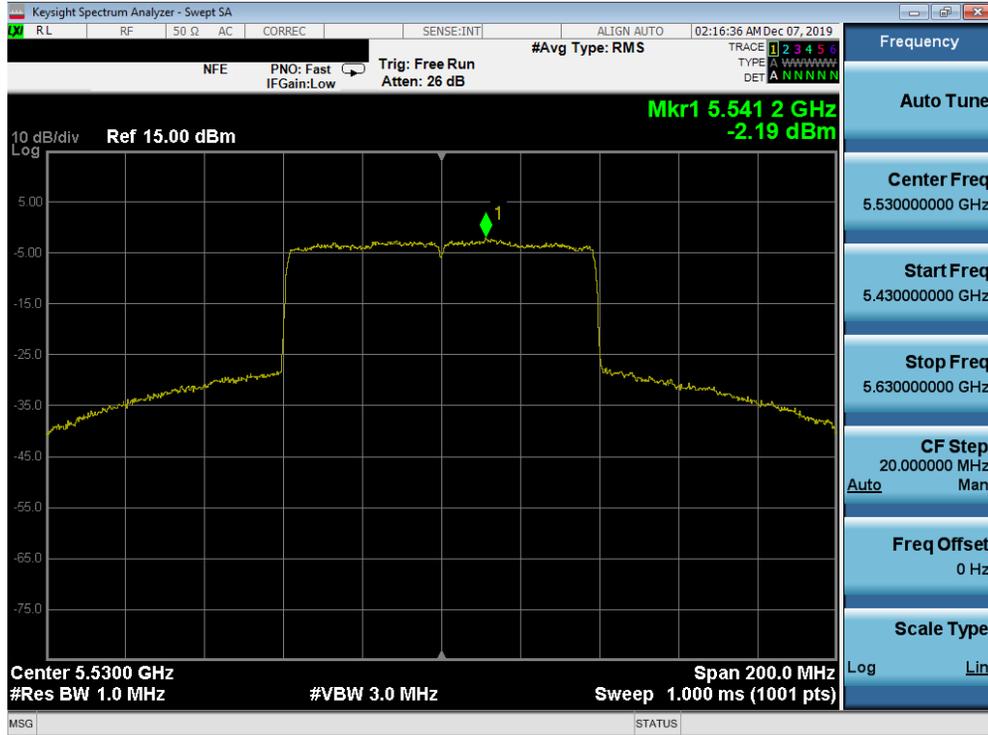

Plot 7-100. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 106)

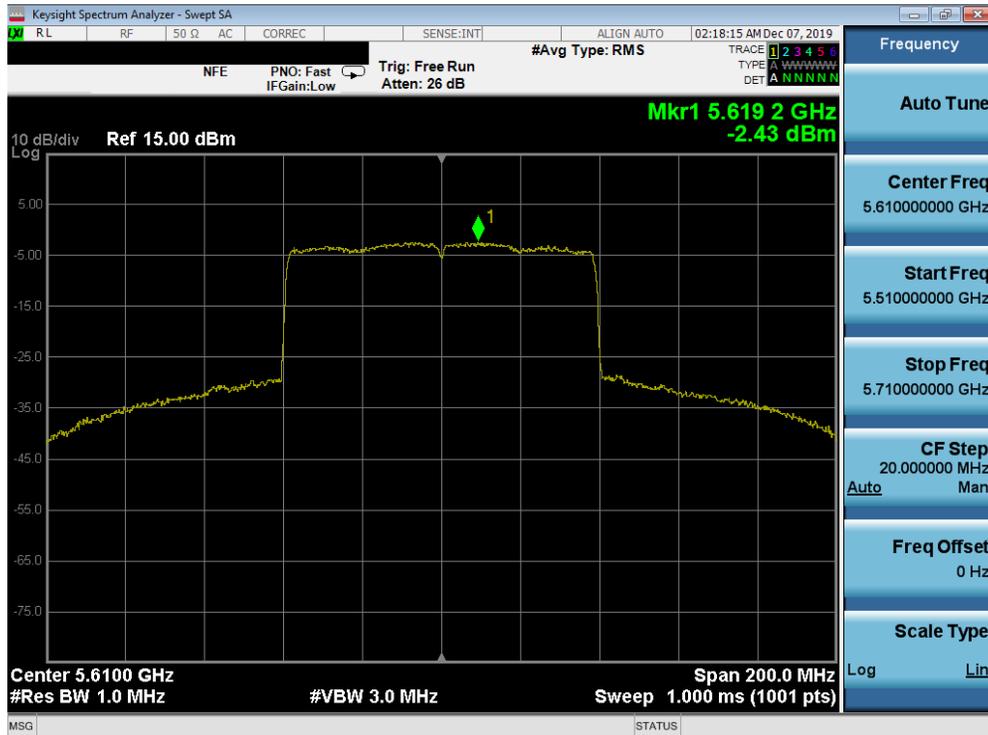

Plot 7-101. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 96 of 270




Plot 7-102. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – Full Tones (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 97 of 270

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density	Margin [dB]
Band 3	5745	149	ax (20MHz)	242T	MCS0	1.77	30.00	-28.23
	5785	157	ax (20MHz)	242T	MCS0	2.00	30.00	-28.00
	5825	165	ax (20MHz)	242T	MCS0	2.18	30.00	-27.83
	5755	151	ax (40MHz)	484T	MCS0	-2.56	30.00	-32.56
	5795	159	ax (40MHz)	484T	MCS0	-1.79	30.00	-31.79
	5775	155	ax (80MHz)	996T	MCS0	-2.94	30.00	-32.94

Table 7-56. Band 3 Conducted Power Spectral Density Measurements SISO ANT1 (Full Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset			Page 98 of 270

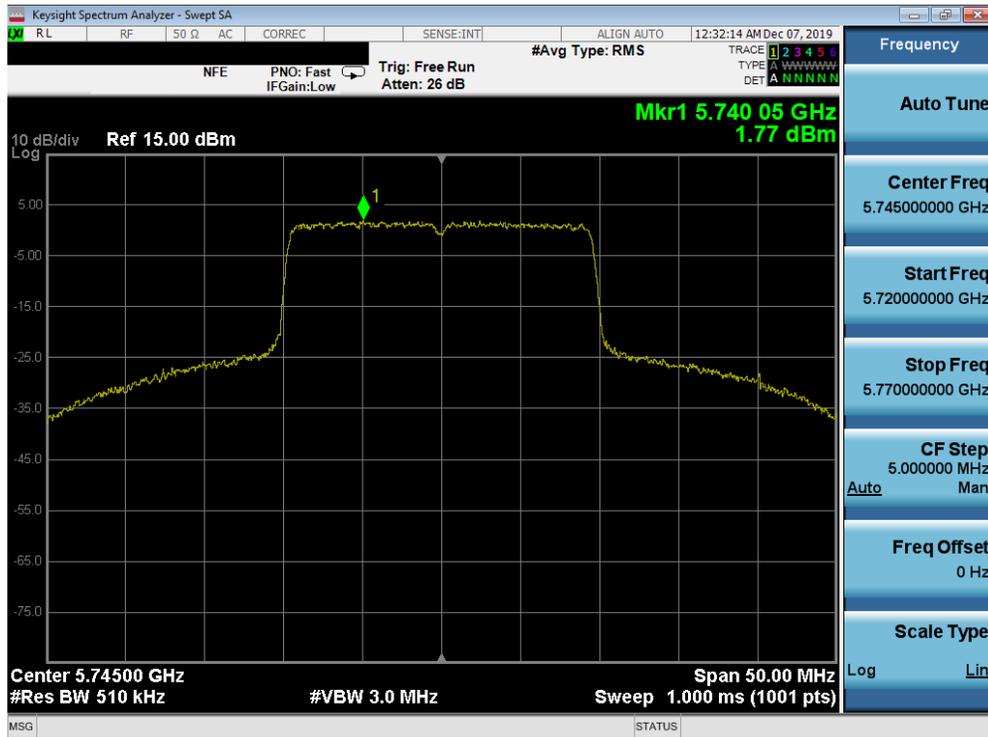


Plot 7-103. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 149)




Plot 7-104. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 99 of 270

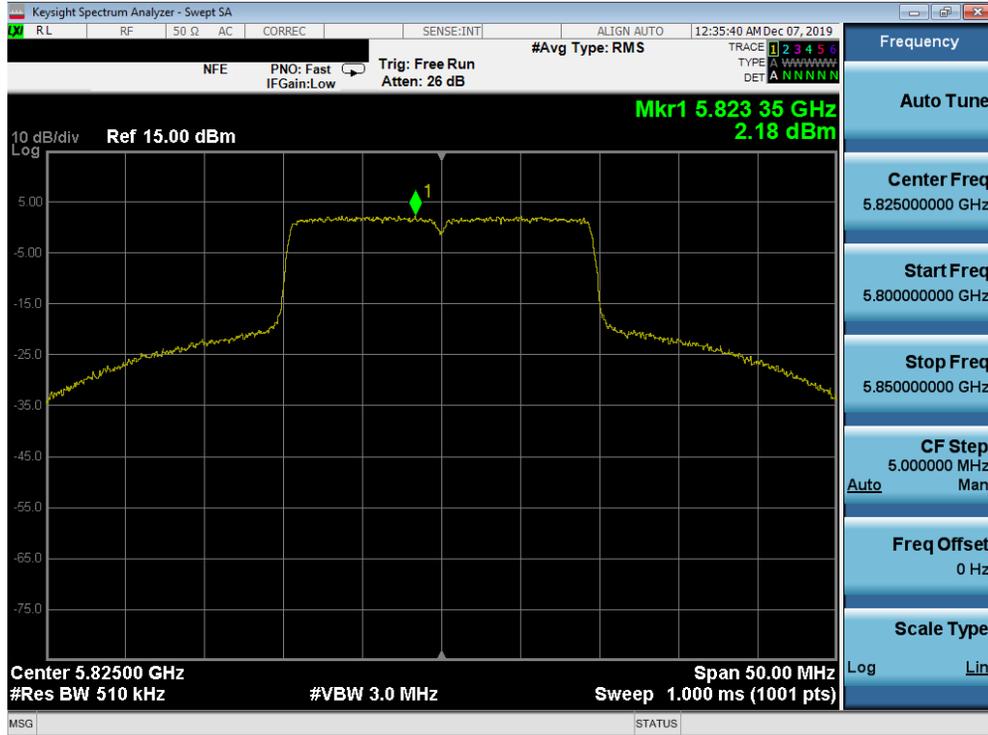


Plot 7-105. Power Spectral Density Plot SISO ANT1 (20 MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 165)

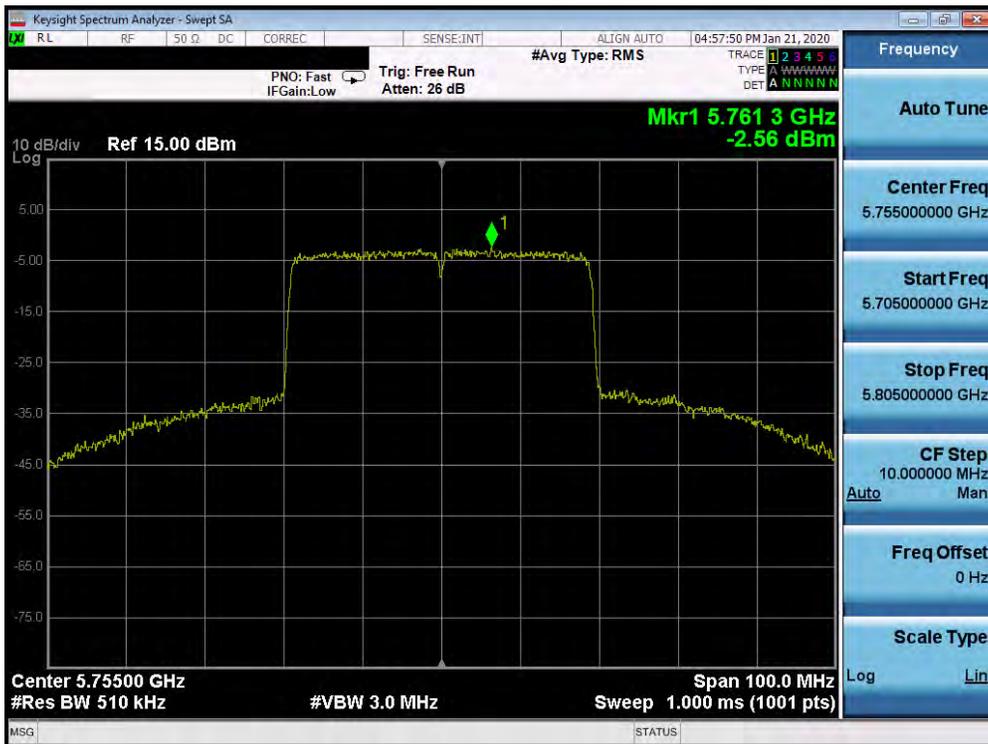


Plot 7-106. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 151)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 100 of 270

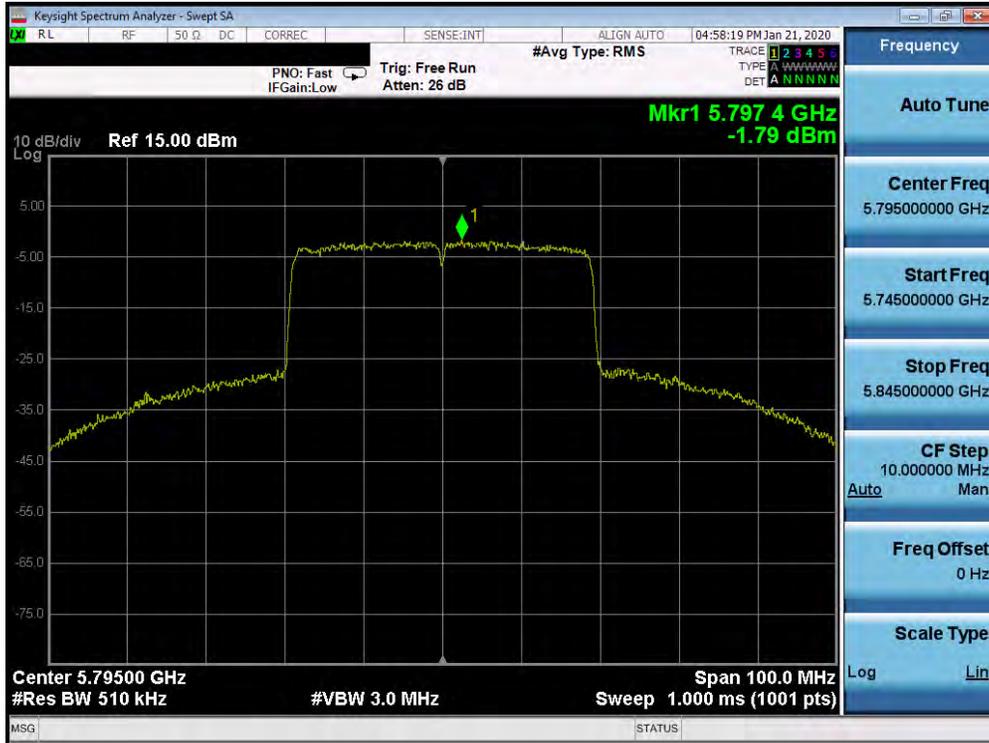

Plot 7-107. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 159)

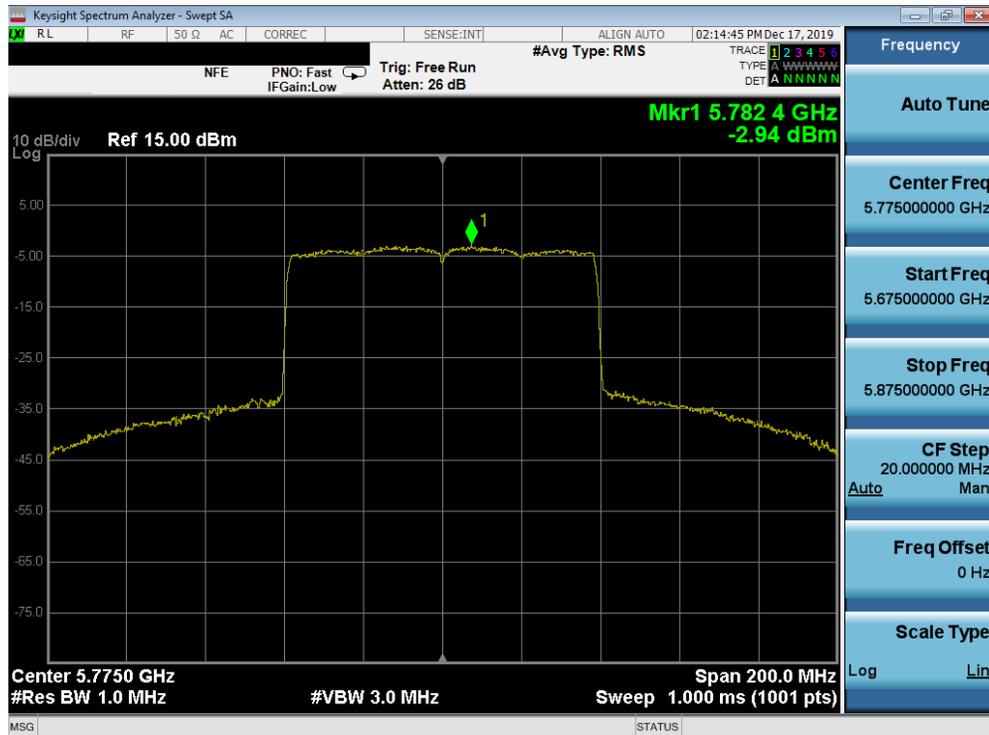

Plot 7-108. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – Full Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 101 of 270

SISO Antenna-2 Power Spectral Density Measurements (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26T	MCS0	7.42	11.0	-3.58
	5200	40	ax (20MHz)	26T	MCS0	7.27	11.0	-3.73
	5240	48	ax (20MHz)	26T	MCS0	7.27	11.0	-3.73
	5190	38	ax (40MHz)	26T	MCS0	8.54	11.0	-2.46
	5230	46	ax (40MHz)	26T	MCS0	9.07	11.0	-1.93
	5210	42	ax (80MHz)	26T	MCS0	7.52	11.0	-3.48
Band 2A	5260	52	ax (20MHz)	26T	MCS0	6.83	11.0	-4.17
	5280	56	ax (20MHz)	26T	MCS0	6.99	11.0	-4.01
	5320	64	ax (20MHz)	26T	MCS0	7.34	11.0	-3.66
	5270	54	ax (40MHz)	26T	MCS0	8.26	11.0	-2.74
	5310	62	ax (40MHz)	26T	MCS0	8.17	11.0	-2.83
	5290	58	ax (80MHz)	26T	MCS0	7.78	11.0	-3.22
Band 2C	5500	100	ax (20MHz)	26T	MCS0	6.91	11.0	-4.09
	5600	120	ax (20MHz)	26T	MCS0	6.89	11.0	-4.11
	5720	144	ax (20MHz)	26T	MCS0	7.13	11.0	-3.87
	5510	102	ax (40MHz)	26T	MCS0	8.37	11.0	-2.63
	5590	118	ax (40MHz)	26T	MCS0	9.45	11.0	-1.56
	5710	142	ax (40MHz)	26T	MCS0	8.04	11.0	-2.96
	5530	106	ax (80MHz)	26T	MCS0	7.56	11.0	-3.44
	5610	122	ax (80MHz)	26T	MCS0	7.39	11.0	-3.62
	5690	138	ax (80MHz)	26T	MCS0	5.80	11.0	-5.20

Table 7-57. Conducted Power Spectral Density Measurements SISO ANT2 (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26T	MCS0	7.42	-7.20	0.22	10.0	-9.78
	5200	40	ax (20MHz)	26T	MCS0	7.27	-7.20	0.07	10.0	-9.93
	5240	48	ax (20MHz)	26T	MCS0	7.27	-5.70	1.57	10.0	-8.43
	5190	38	ax (40MHz)	26T	MCS0	8.54	-7.20	1.34	10.0	-8.66
	5230	46	ax (40MHz)	26T	MCS0	9.07	-5.70	3.37	10.0	-6.63
	5210	42	ax (80MHz)	26T	MCS0	7.52	-7.20	0.32	10.0	-9.68

Table 7-58. Band 1 e.i.r.p. Conducted Power Spectral Density Measurements (ISED 26 Tones)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 102 of 270	




Plot 7-109. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 36)

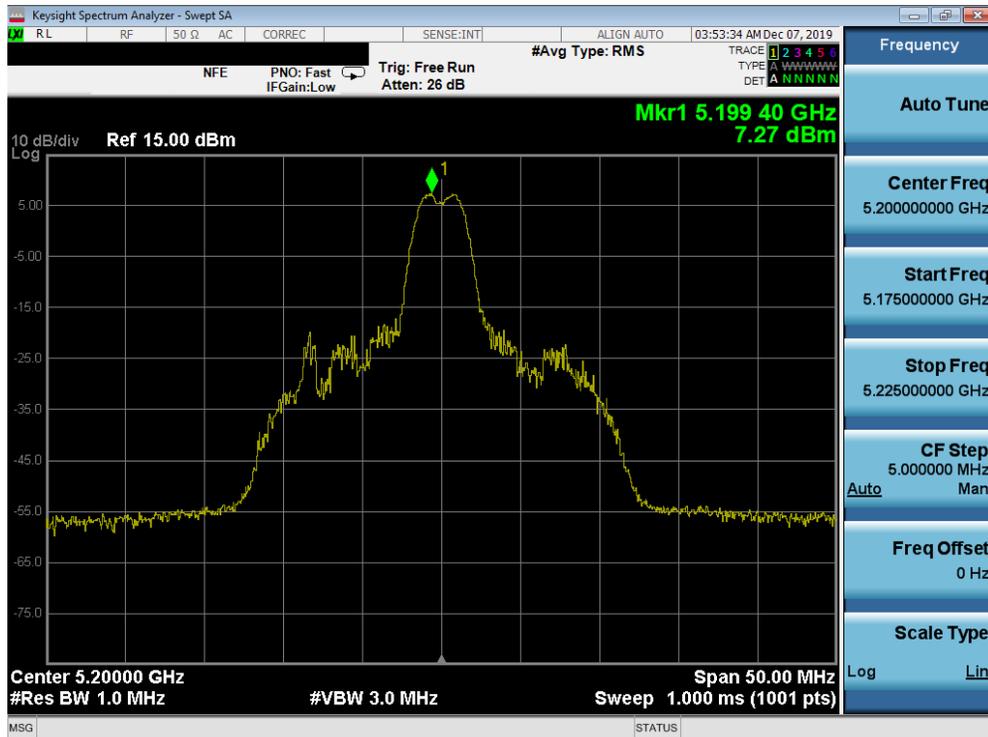


Plot 7-110. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 103 of 270

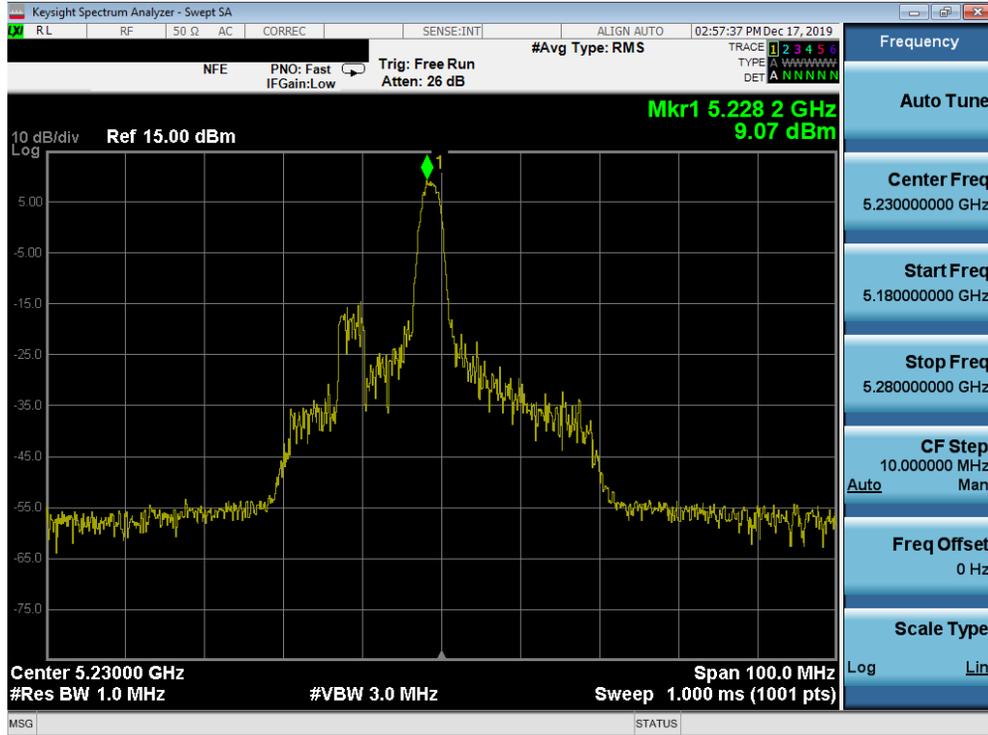


Plot 7-113. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 46)

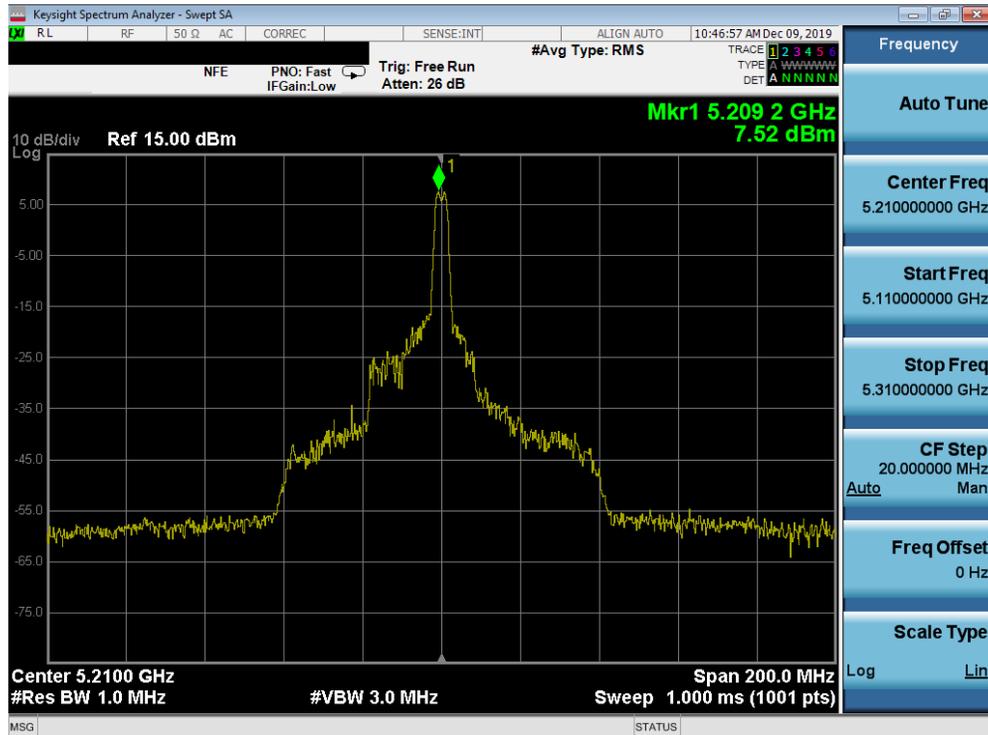

Plot 7-114. Power Spectral Density Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 105 of 270

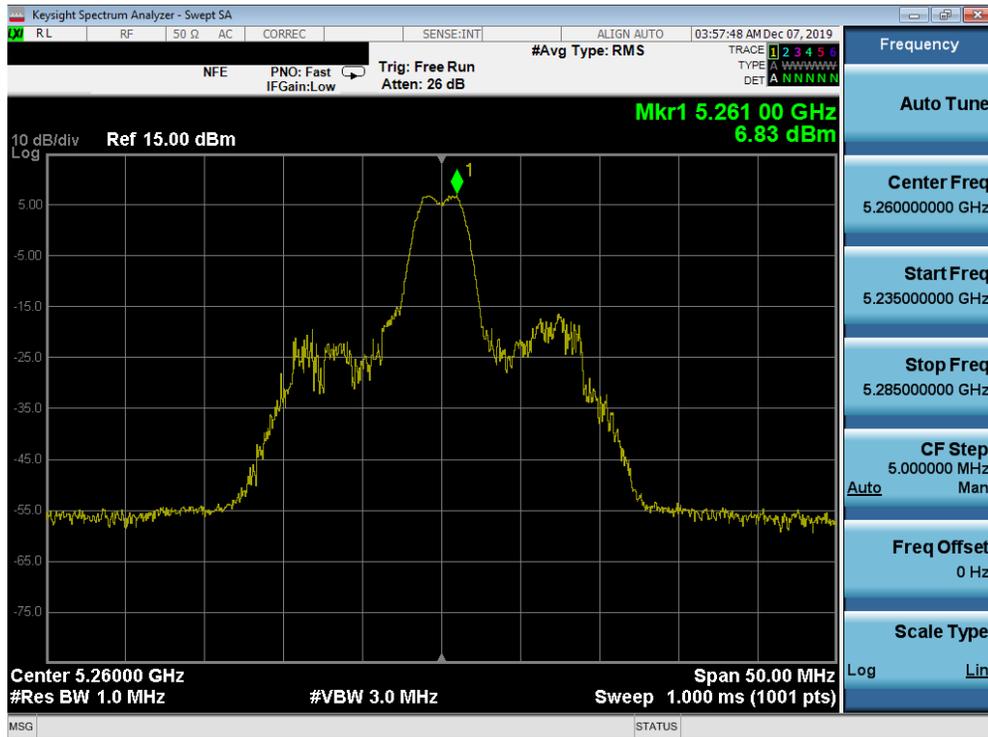


Plot 7-115. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 52)




Plot 7-116. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 106 of 270

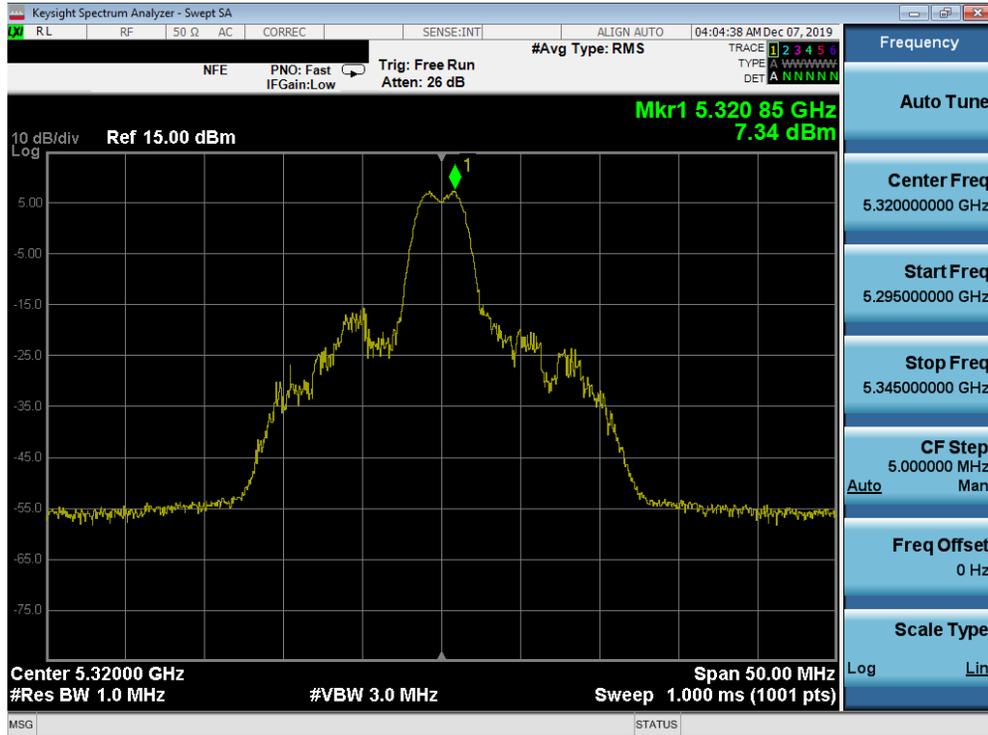


Plot 7-117. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 64)

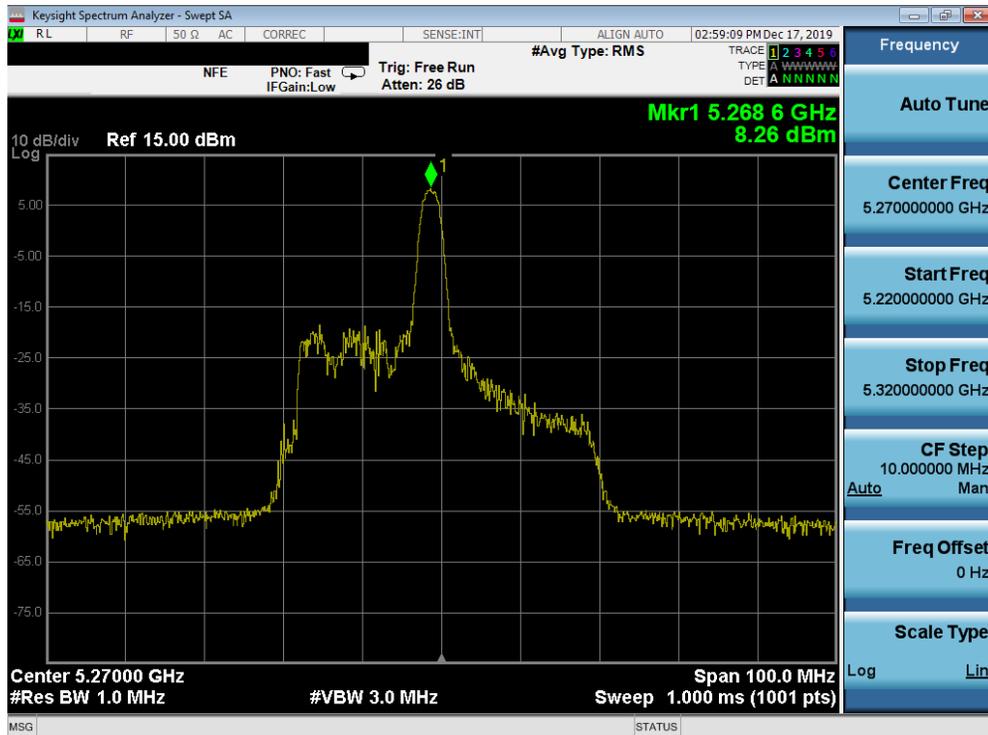


Plot 7-118. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 107 of 270

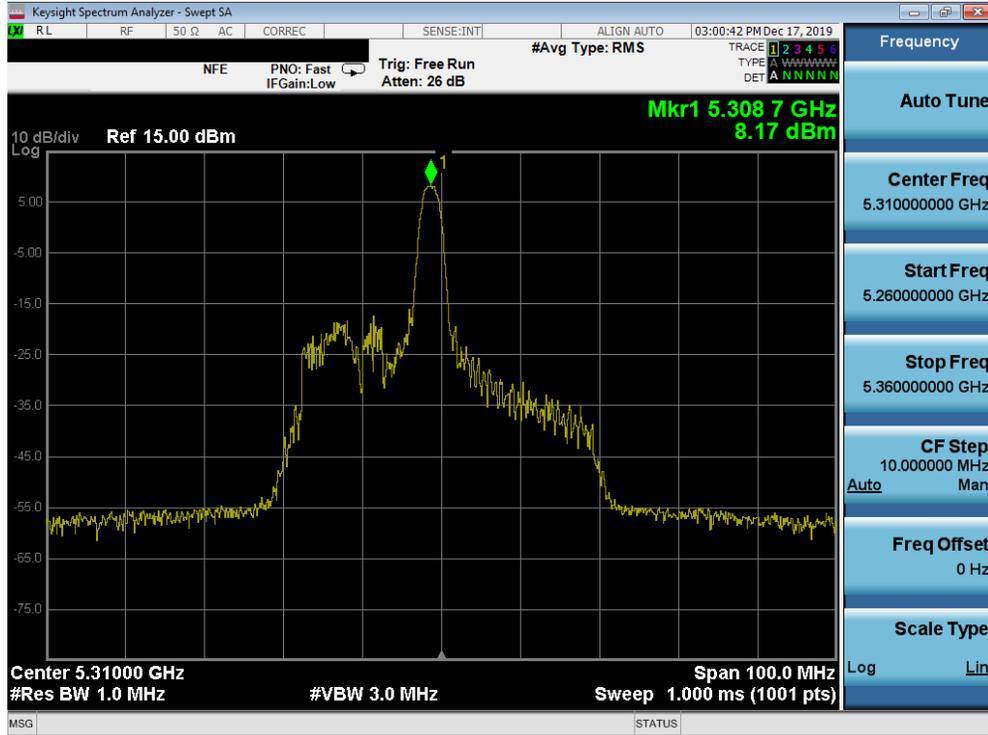


Plot 7-119. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 62)

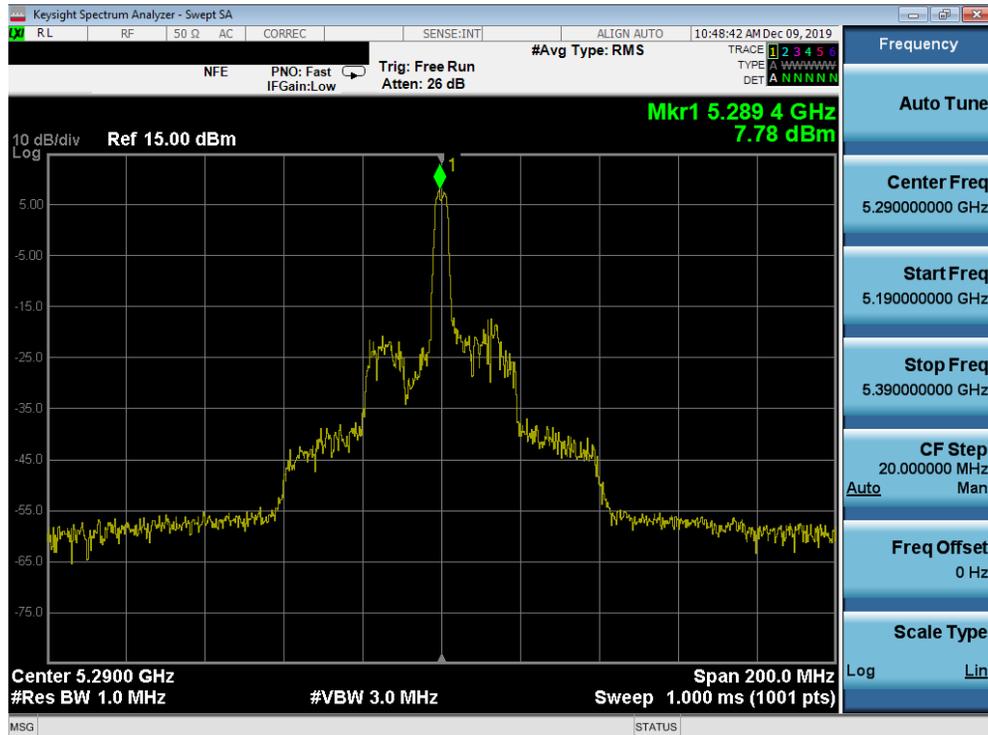


Plot 7-120. Power Spectral Density Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 108 of 270

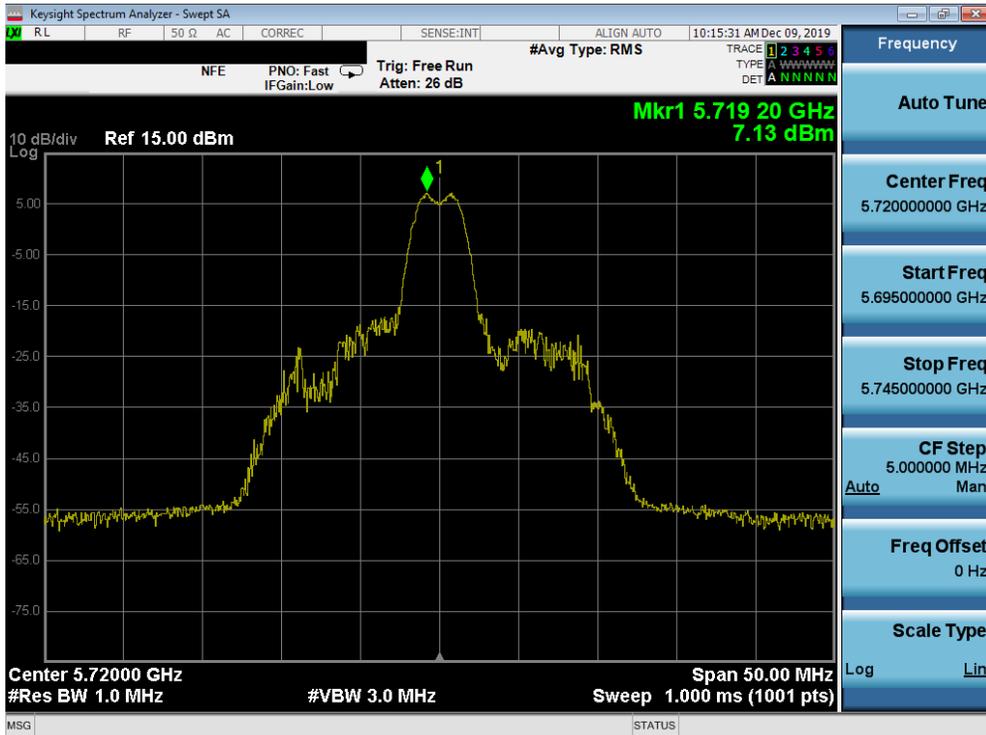


Plot 7-123. Power Spectral Density Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 144)

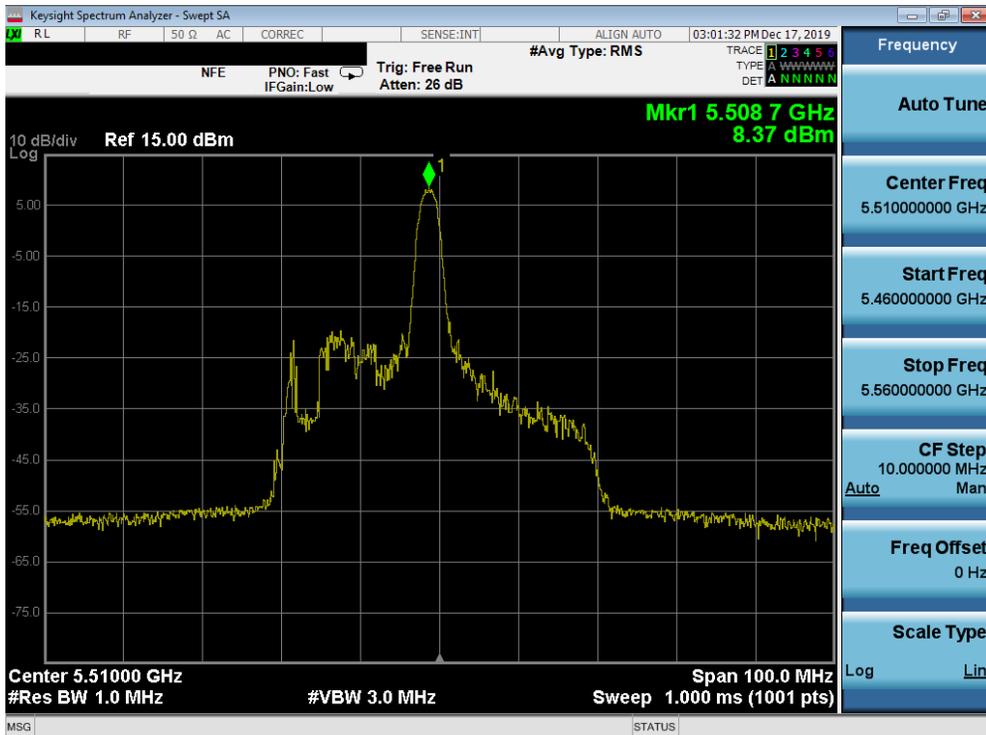


Plot 7-124. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 110 of 270

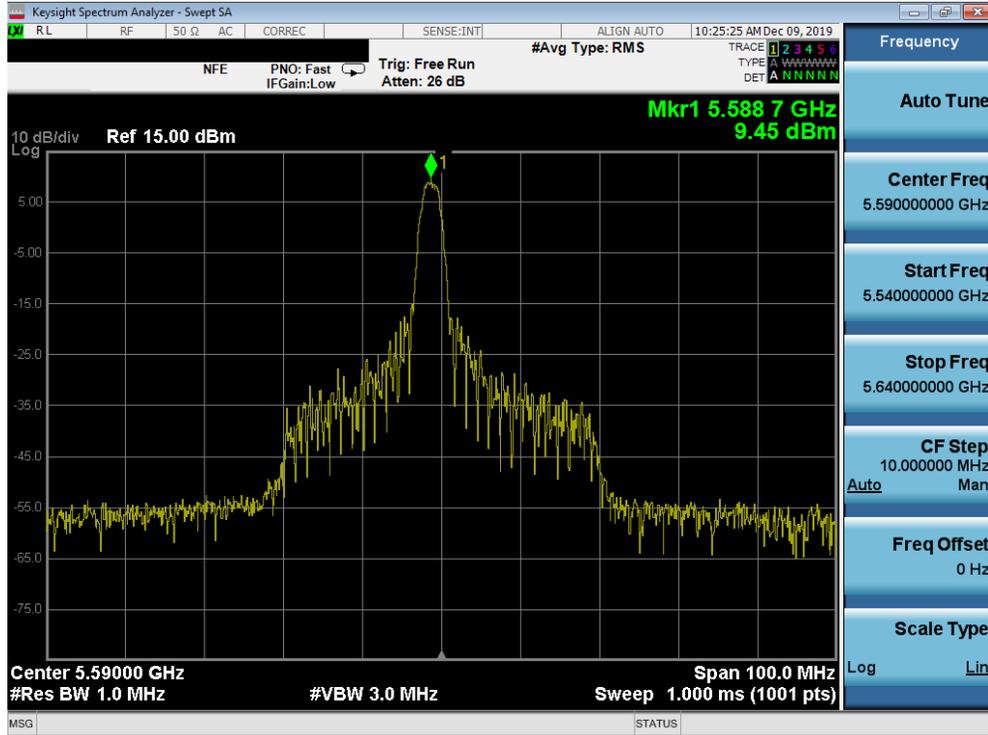

Plot 7-125. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

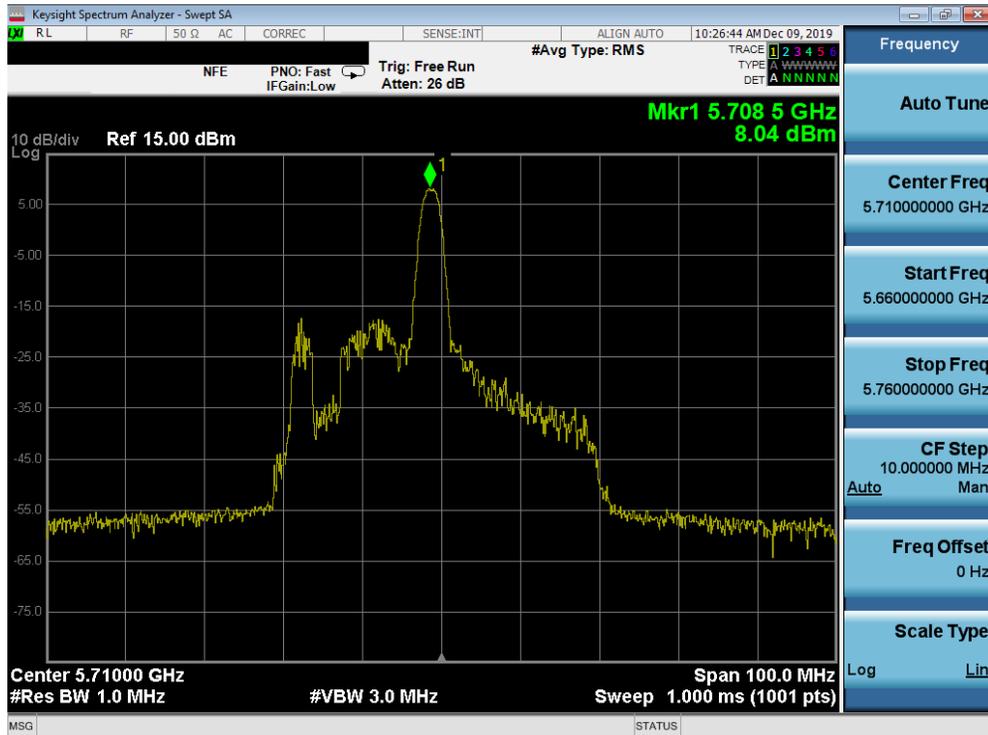

Plot 7-126. Power Spectral Density Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-09-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 111 of 270