



PCTEST

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.pctest.com>



MEASUREMENT REPORT Part 96 LTE

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
11/14/2019 - 1/31/2020
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M1911140187-05-R1.A3L

FCC ID:	A3LSMG988U
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SM-G988U
Additional Models: SM-G988U1, SM-G988W
EUT Type: Portable Handset
FCC Classification: Citizens Band End User Devices (CBE)
FCC Rule Part(s): 96
Test Procedure(s): ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 648474 D03 v01r04, KDB 940660 D01 v02, WINNF-TS-0122 V1.0.0

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This revised Test Report (S/N: 1M1911140187-05-R1.A3L) supersedes and replaces the previously issued test report (S/N: 1M1911140187-05.A3L) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

Randy Ortanez
President




FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 1 of 85

TABLE OF CONTENTS


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Measurement Procedure.....	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	10
7.1	Summary	10
7.2	Occupied Bandwidth	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal	29
7.4	Band Edge Emissions at Antenna Terminal	39
7.5	Additional Maximum Power Reduction (A-MPR).....	46
7.6	Uplink Carrier Aggregation	48
7.7	Radiated Power (EIRP)	63
7.8	Radiated Spurious Emissions Measurements.....	67
7.9	Uplink Carrier Aggregation Radiated Measurements	72
7.10	Frequency Stability / Temperature Variation	77
7.11	End User Device Additional Requirement (CBSD Protocol).....	80
8.0	CONCLUSION.....	85

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 2 of 85



MEASUREMENT REPORT

FCC Part 96



Mode	FCC Rule Part	Tx Frequency (MHz)	EIRP		Emission Designator	Modulation
			Max. Power (W)	Max. Power (dBm)		
LTE Band 48	96	3552.5 - 3697.5	0.103	20.13	4M51G7D	QPSK
LTE Band 48	96	3552.5 - 3697.5	0.097	19.85	4M52W7D	16QAM
LTE Band 48	96	3552.5 - 3697.5	0.079	18.98	4M53W7D	64QAM
LTE Band 48	96	3552.5 - 3697.5	0.047	16.73	4M49W7D	256QAM
LTE Band 48	96	3555 - 3695	0.105	20.20	8M86G7D	QPSK
LTE Band 48	96	3555 - 3695	0.094	19.73	8M78W7D	16QAM
LTE Band 48	96	3555 - 3695	0.065	18.14	8M80W7D	64QAM
LTE Band 48	96	3555 - 3695	0.037	15.63	8M68W7D	256QAM
LTE Band 48	96	3557.5 - 3692.5	0.100	20.01	13M5G7D	QPSK
LTE Band 48	96	3557.5 - 3692.5	0.087	19.40	13M5W7D	16QAM
LTE Band 48	96	3557.5 - 3692.5	0.069	18.39	13M5W7D	64QAM
LTE Band 48	96	3557.5 - 3692.5	0.041	16.14	13M5W7D	256QAM
LTE Band 48	96	3560 - 3690	0.121	20.81	17M9G7D	QPSK
LTE Band 48	96	3560 - 3690	0.097	19.86	17M9W7D	16QAM
LTE Band 48	96	3560 - 3690	0.081	19.11	18M0W7D	64QAM
LTE Band 48	96	3560 - 3690	0.048	16.79	18M0W7D	256QAM
LTE Band 48	96	3552.5 - 3697.5	0.135	21.30	23M0G7D	QPSK
LTE Band 48	96	3552.5 - 3697.5	0.134	21.28	23M0W7D	16QAM
LTE Band 48	96	3552.5 - 3697.5	0.127	21.03	23M0W7D	64QAM
LTE Band 48	96	3552.5 - 3697.5	0.104	20.15	22M3W7D	256QAM
LTE Band 48	96	3555 - 3695	0.141	21.49	27M9G7D	QPSK
LTE Band 48	96	3555 - 3695	0.115	20.59	27M8W7D	16QAM
LTE Band 48	96	3555 - 3695	0.079	18.97	27M8W7D	64QAM
LTE Band 48	96	3555 - 3695	0.083	19.17	26M8W7D	256QAM
LTE Band 48	96	3557.5 - 3692.5	0.128	21.08	32M6G7D	QPSK
LTE Band 48	96	3557.5 - 3692.5	0.109	20.36	32M7W7D	16QAM
LTE Band 48	96	3557.5 - 3692.5	0.102	20.09	32M8W7D	64QAM
LTE Band 48	96	3557.5 - 3692.5	0.098	19.89	31M4W7D	256QAM
LTE Band 48	96	3560 - 3690	0.145	21.61	37M7G7D	QPSK
LTE Band 48	96	3560 - 3690	0.144	21.57	37M7W7D	16QAM
LTE Band 48	96	3560 - 3690	0.090	19.54	37M6W7D	64QAM
LTE Band 48	96	3560 - 3690	0.070	18.46	37M2W7D	256QAM

EUT Overview (LTE B48)

Note: EIRP levels shown in the table above are measured over the full channel bandwidth. These values will appear on the Grant of Authorization.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 3 of 85	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is a CBRS Alliance (OnGo) Approved Test Lab
- PCTEST is a WinnForum Approved Test Lab
- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for CBRS Alliance Certification Test Plan and WinnForum Conformance and Performance Test Technical Standard.
- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 4 of 85	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMG988U**. The test data contained in this report pertains only to the emissions due to the EUT's LTE Band 48 operation in the CBR5 band. Per FCC Part 96, this device is evaluated under Citizens Band End User Devices (CBE).

Test Device Serial No.: 1766S, 1307S, 1332S, 1332S, 0643M, 1203M, 1203M, 1768S, 0669M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (n71, n5, n66, n2, n41, n260, n261), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, ANT+, Wireless Power Transfer

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT placed on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 5 of 85	

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi]$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss} [dB]$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -40dBm/MHz for End User Devices.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 6 of 85	

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 7 of 85	

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	6/4/2019	Annual	6/4/2020	LTx1
-	LTx2	Licensed Transmitter Cable Set	10/30/2019	Annual	10/30/2020	LTx2
Agilent	N9020A	MXA Signal Analyzer	4/20/2019	Annual	4/20/2020	US46470561
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	5/10/2019	Annual	5/10/2020	441112
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/9/2018	Biennial	8/9/2020	135427
Mini-Circuits	PWR-SEN-4RMS	USB Power Sensor	4/20/2019	Annual	4/20/2020	11210140001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Rohde & Schwarz	CMW500	Radio Communication Tester	8/26/2019	Annual	8/26/2020	100976
Rohde & Schwarz	CMW500	Radio Communication Tester	6/26/2019	Annual	6/26/2020	112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	6/5/2019	Annual	6/5/2020	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/11/2019	Annual	7/11/2020	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/8/2019	Annual	7/8/2020	102133
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	1/31/2019	Annual	1/31/2020	100040
Sunol	DRH-118	Horn Antenna (1-18 GHz)	8/27/2019	Biennial	8/27/2021	A042511
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 8 of 85	

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (7250 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 9 of 85	

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMG988U
 FCC Classification: Citizens Band End User Devices (CBE)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1046	Transmitter Conducted Output Power	N/A			See RF Exposure Report
2.1051 96.41(e)(ii)	Out of Band Emissions	-13 dBm/MHz at frequencies within 0-B MHz of channel edge (where B is the bandwidth of the assigned channel) -25 dBm/MHz at frequencies greater than B MHz above and below channel edge -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz			Section 7.3, 7.4
2.1046	Additional Maximum Power Reduction (A-MPR)	N/A			Section 7.5
2.1055	Frequency Stability	Fundamental emissions stay within authorized frequency block			Section 7.10
96.47	End User Device Additional Requirements (CBSD Protocol)	End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation. An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.			Section 7.11
96.41(e)	Uplink Carrier Aggregation	>43 + 10log(P[Watts]) at Band Edge and for all out-of-band emissions			Section 7.6

Table 7-1. Summary of Conducted Test Results

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 10 of 85	

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
96.41(b)	Equivalent Isotropic Radiated Power (EIRP)	23 dBm/10MHz	RADIATED	PASS	Section 7.7
2.1053 96.41(e)	Undesirable Emissions	-40 dBm/MHz			Section 7.8
96.41(e)	Uplink Carrier Aggregation	Undesirable emissions must meet the limits detailed in 27.53(m)			Section 7.9

Table 7-2. Summary of Radiated Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "LTE Automation," Version 5.1.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 11 of 85	

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

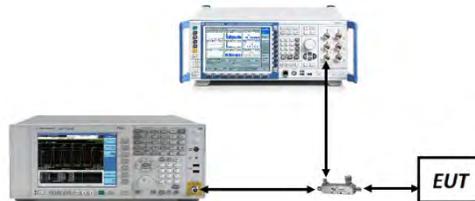



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 12 of 85

LTE Band 48

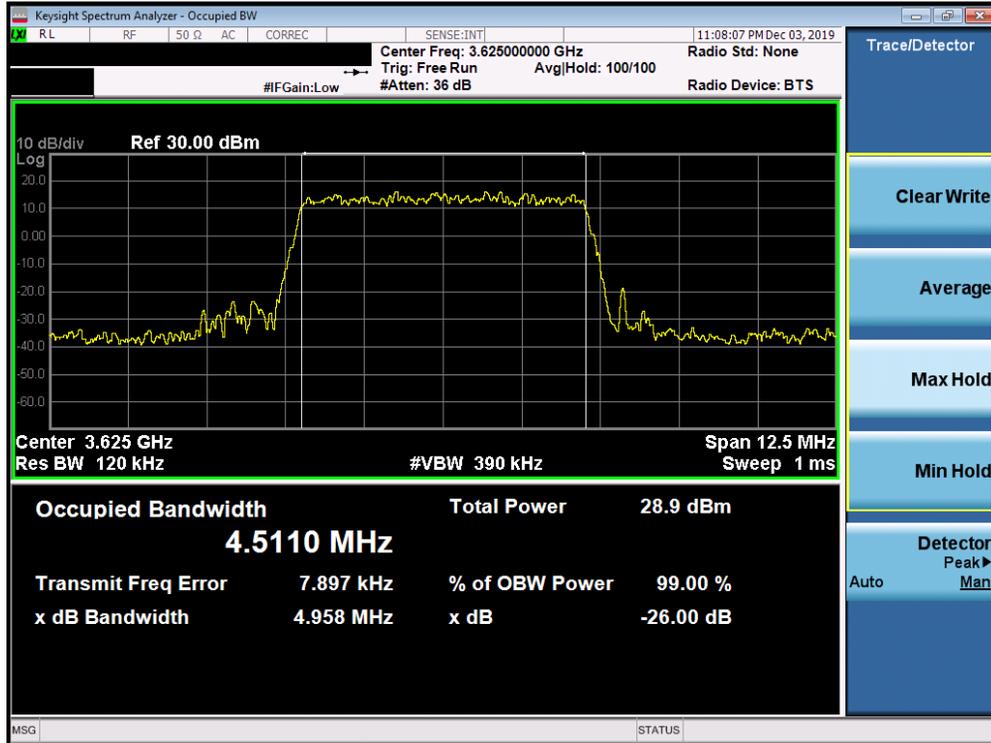


Plot 7-1. Occupied Bandwidth Plot (LTE Band 48 - 5.0MHz QPSK - Full RB Configuration)

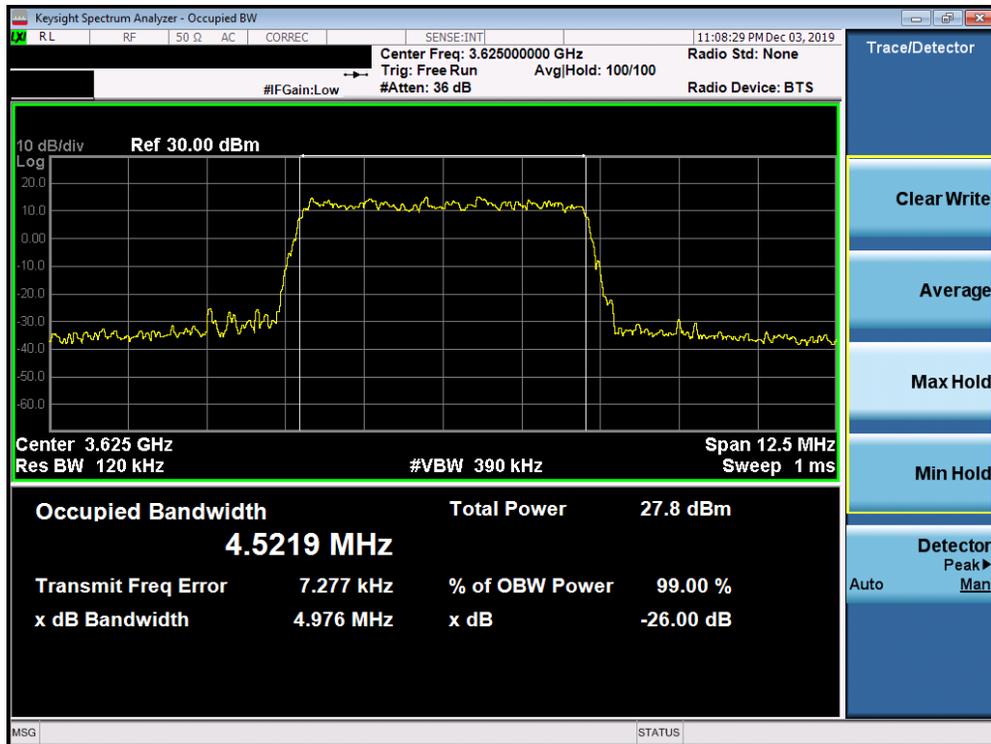


Plot 7-2. Occupied Bandwidth Plot (LTE Band 48 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 13 of 85

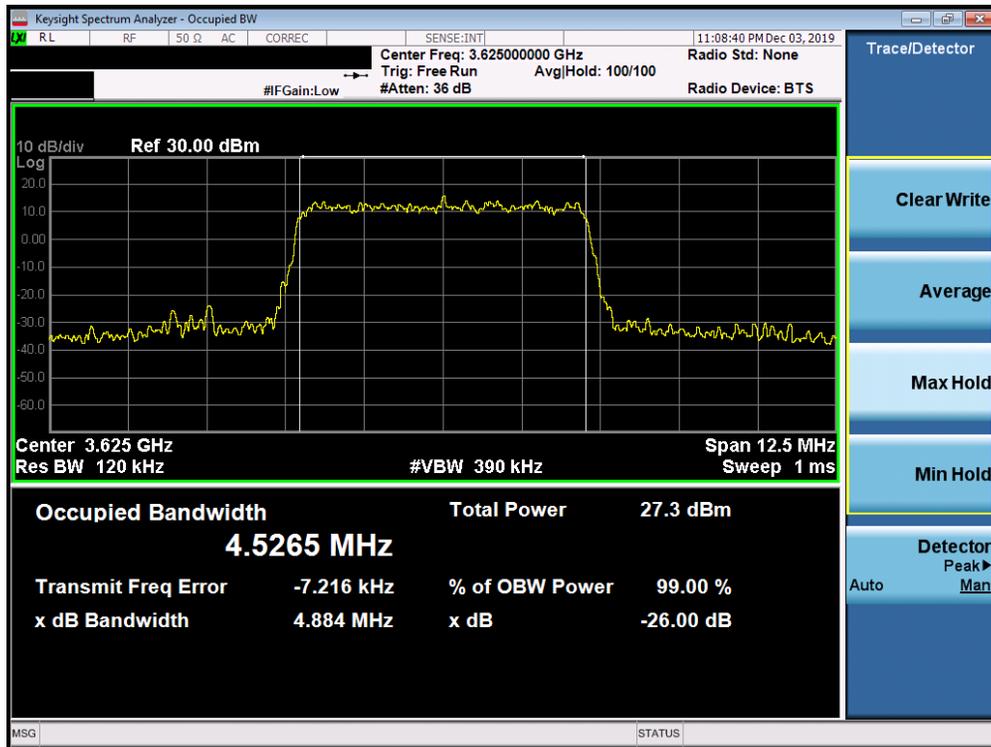


Plot 7-3. Occupied Bandwidth Plot (LTE Band 48 - 5.0MHz 64-QAM - Full RB Configuration)

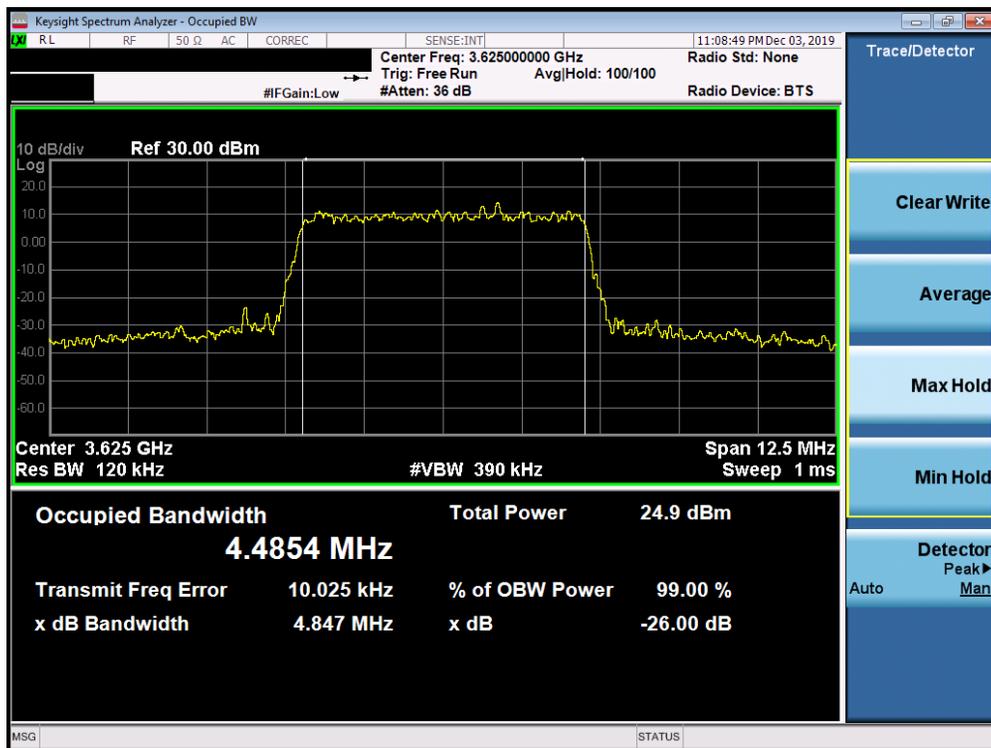


Plot 7-4. Occupied Bandwidth Plot (LTE Band 48 - 5.0MHz -256QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 14 of 85

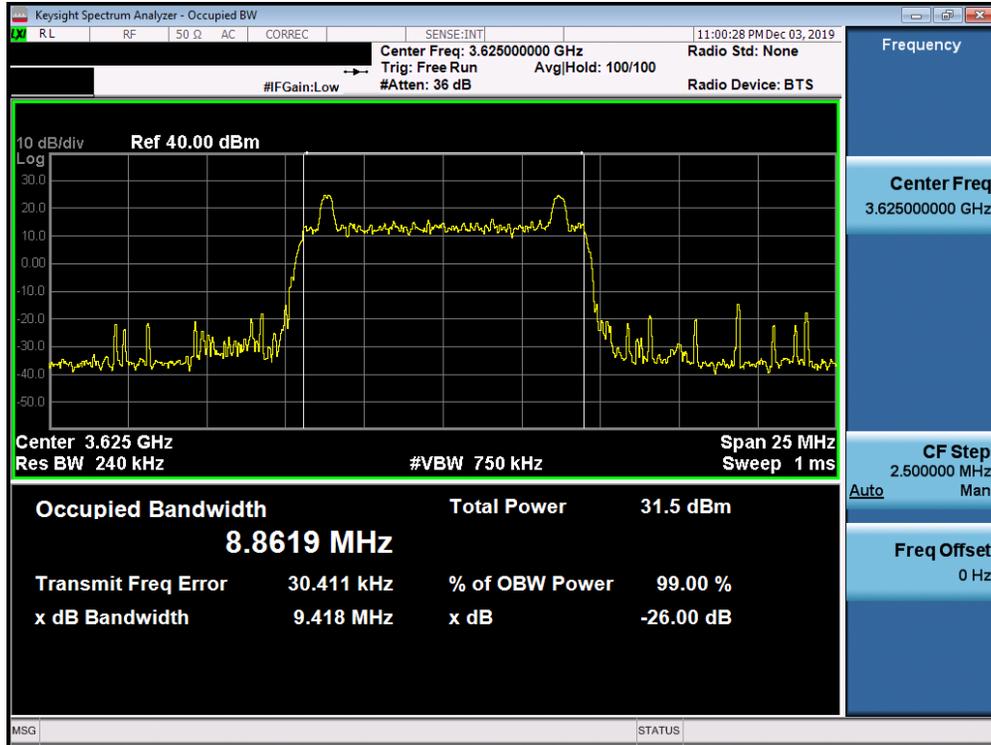


Plot 7-5. Occupied Bandwidth Plot (LTE Band 48 - 10.0MHz QPSK - Full RB Configuration)

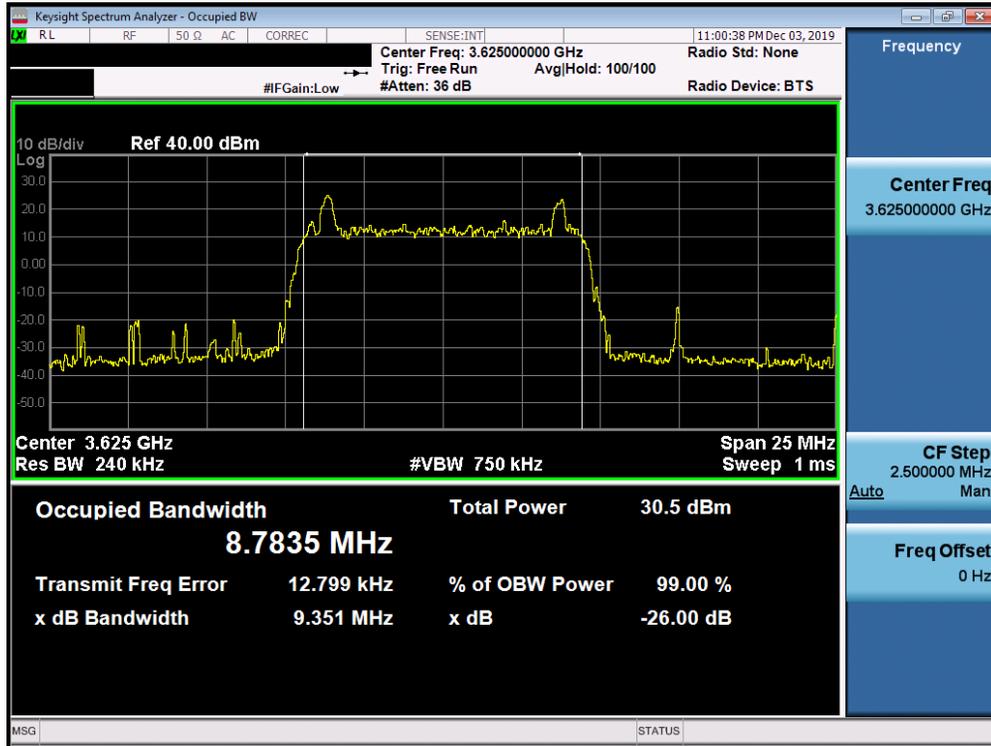


Plot 7-6. Occupied Bandwidth Plot (LTE Band 48 - 10.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 15 of 85

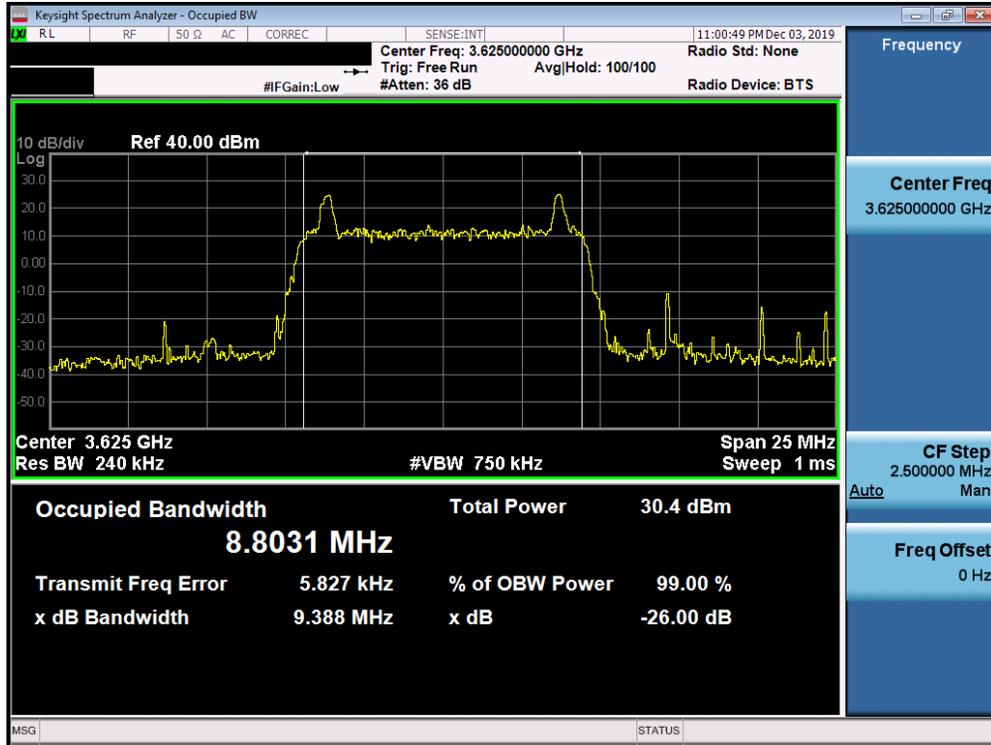


Plot 7-7. Occupied Bandwidth Plot (LTE Band 48 - 10.0MHz 64-QAM - Full RB Configuration)

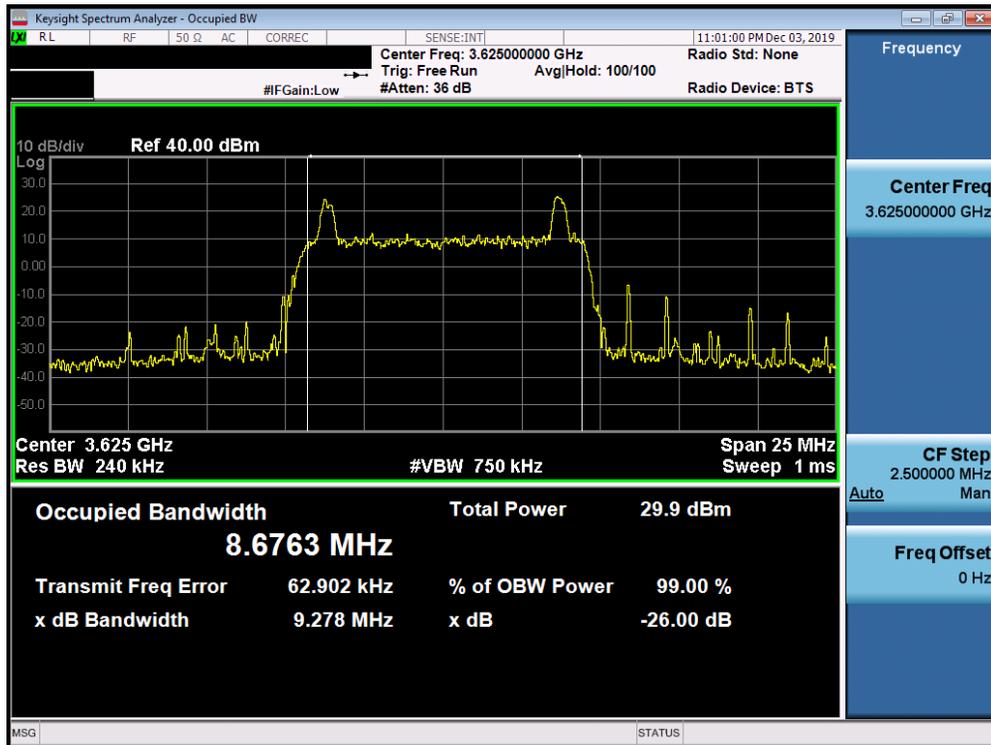


Plot 7-8. Occupied Bandwidth Plot (LTE Band 48 - 10.0MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 16 of 85

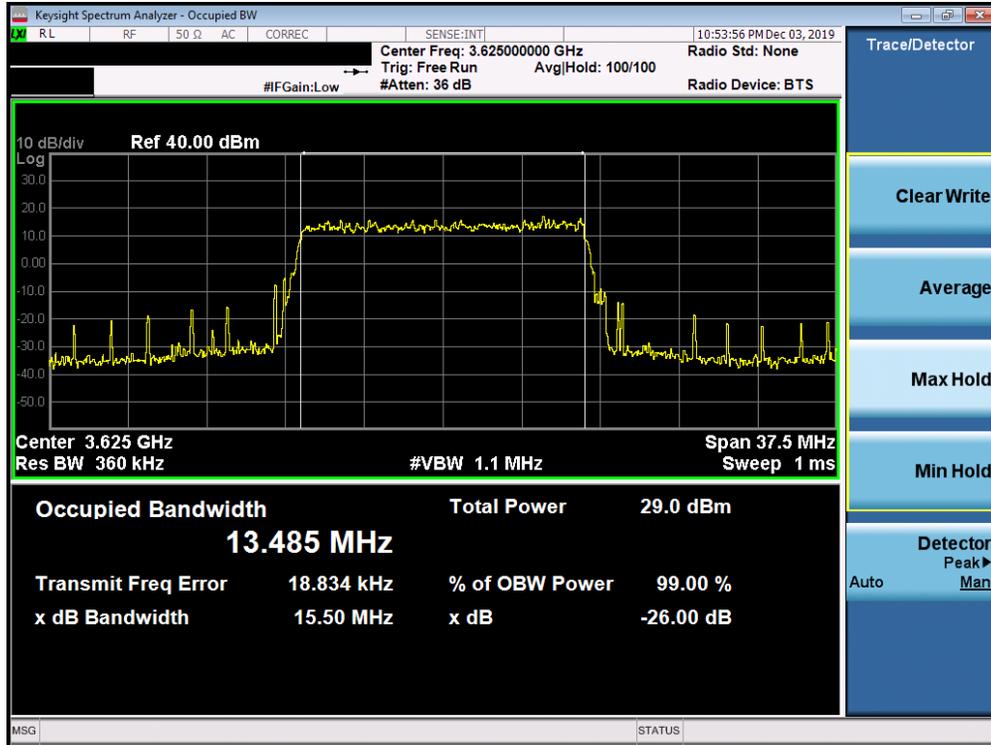


Plot 7-9. Occupied Bandwidth Plot (LTE Band 48 - 15.0MHz QPSK - Full RB Configuration)

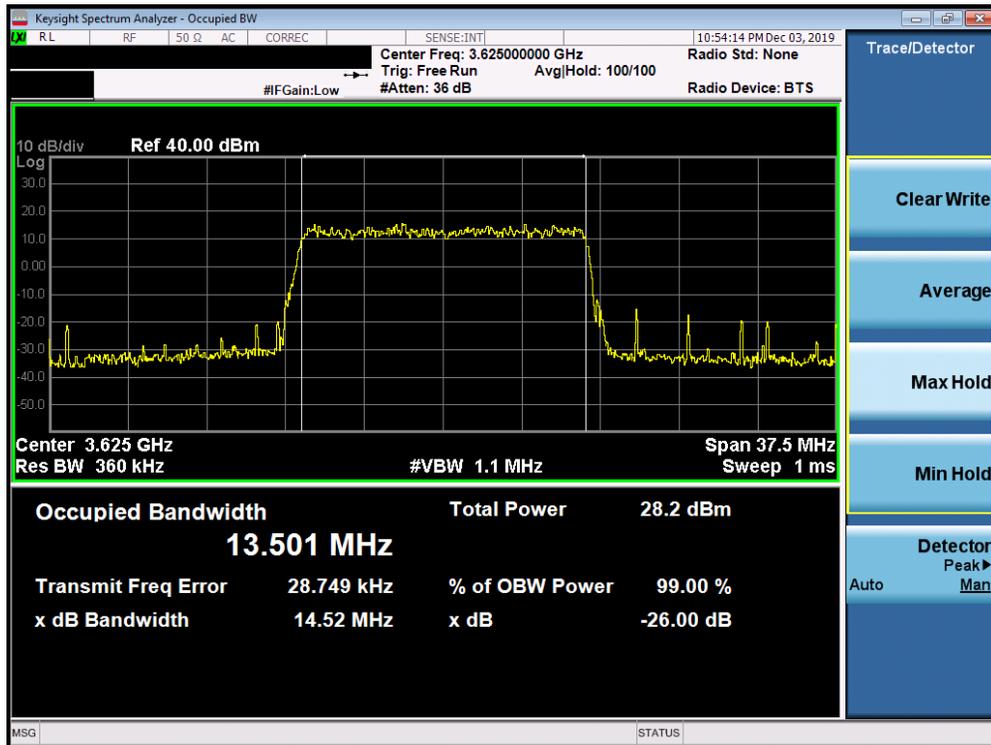


Plot 7-10. Occupied Bandwidth Plot (LTE Band 48 - 15.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 17 of 85

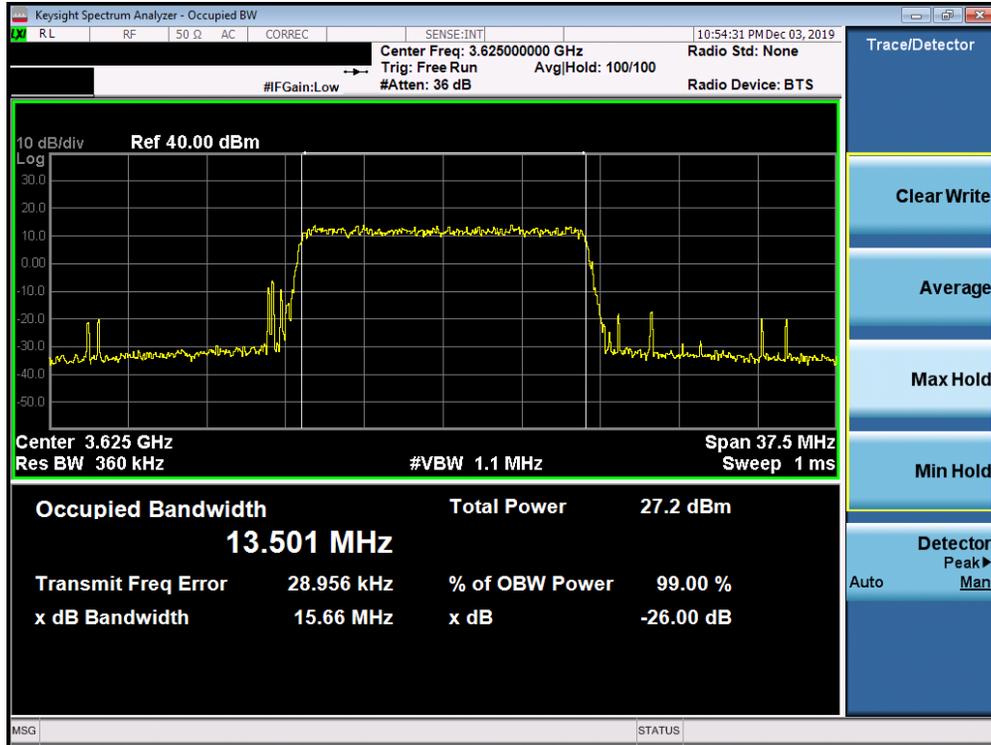


Plot 7-11. Occupied Bandwidth Plot (LTE Band 48 - 15.0MHz 64-QAM - Full RB Configuration)

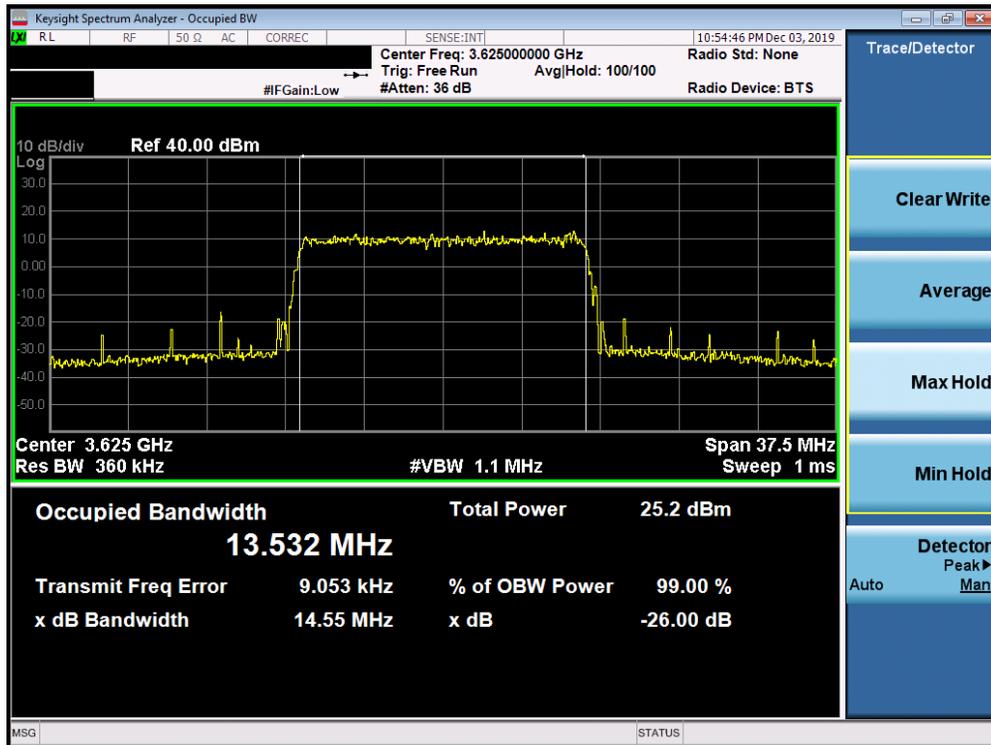


Plot 7-12. Occupied Bandwidth Plot (LTE Band 48 - 15.0MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 18 of 85

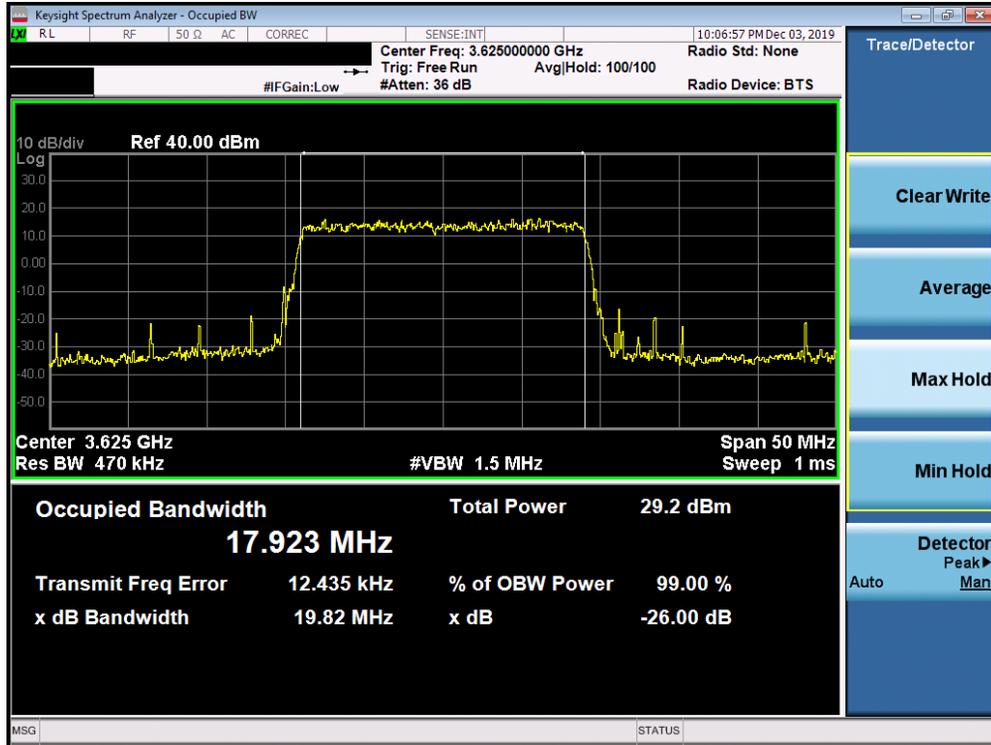


Plot 7-13. Occupied Bandwidth Plot (LTE Band 48 - 20.0MHz QPSK - Full RB Configuration)

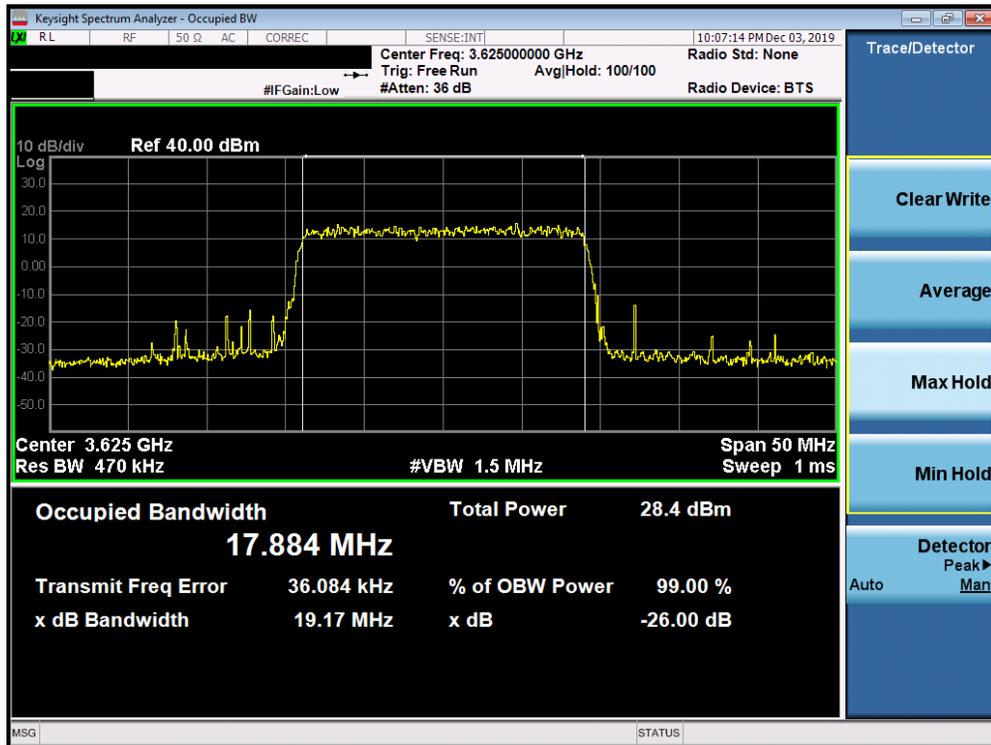


Plot 7-14. Occupied Bandwidth Plot (LTE Band 48 - 20.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 19 of 85

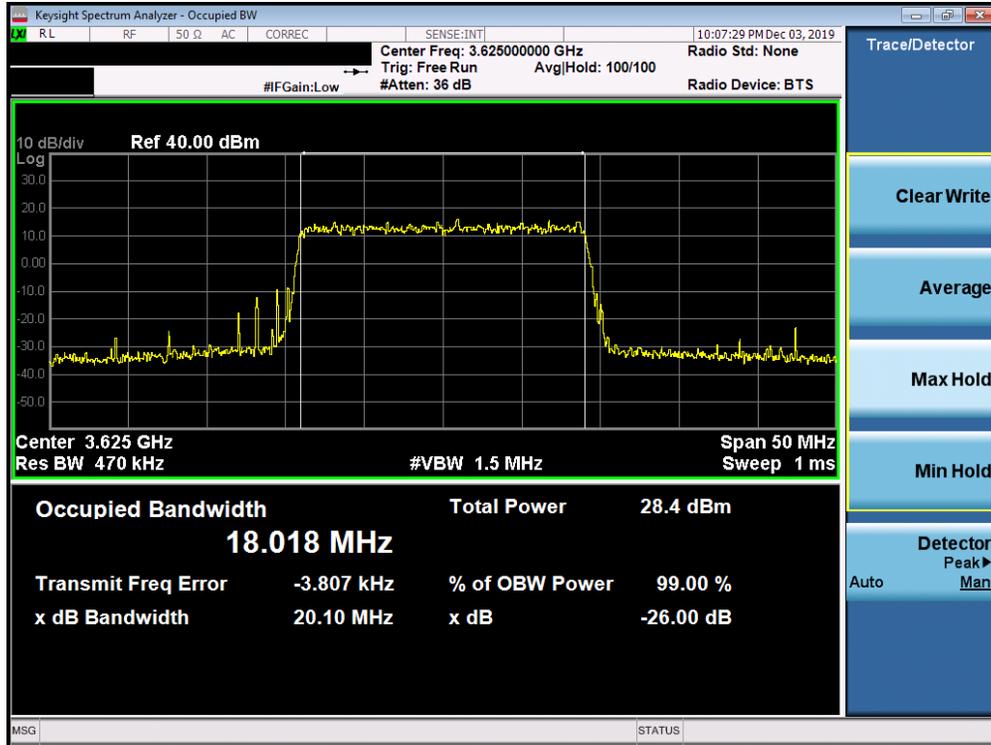


Plot 7-15. Occupied Bandwidth Plot (LTE Band 48 - 20.0MHz 64-QAM - Full RB Configuration)

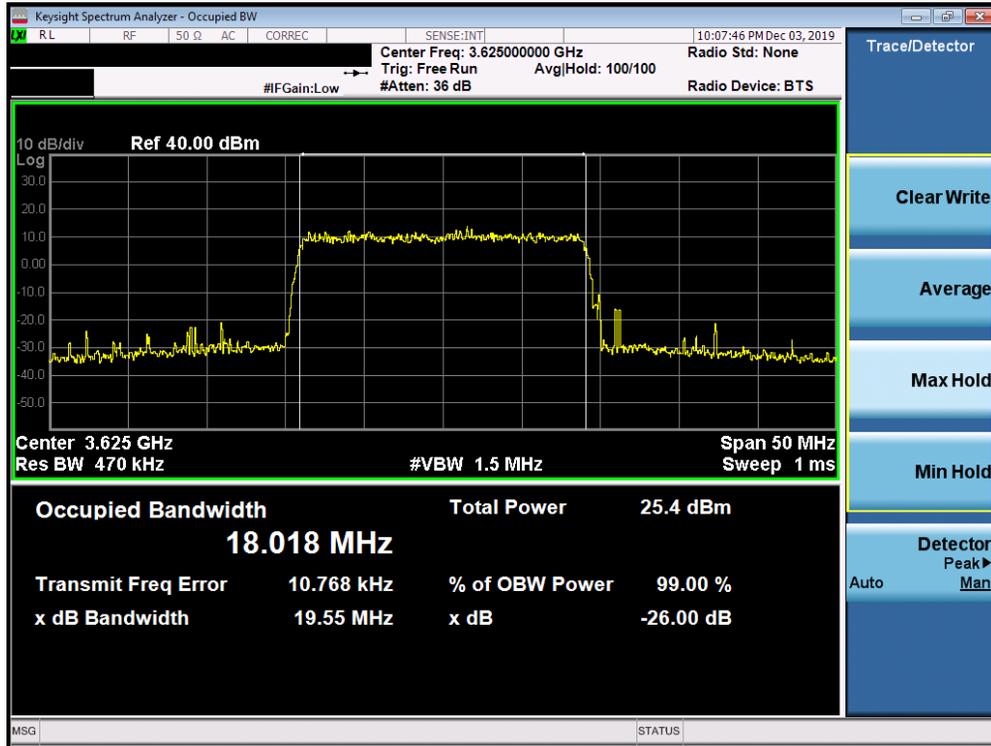


Plot 7-16. Occupied Bandwidth Plot (LTE Band 48 - 20.0MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 20 of 85

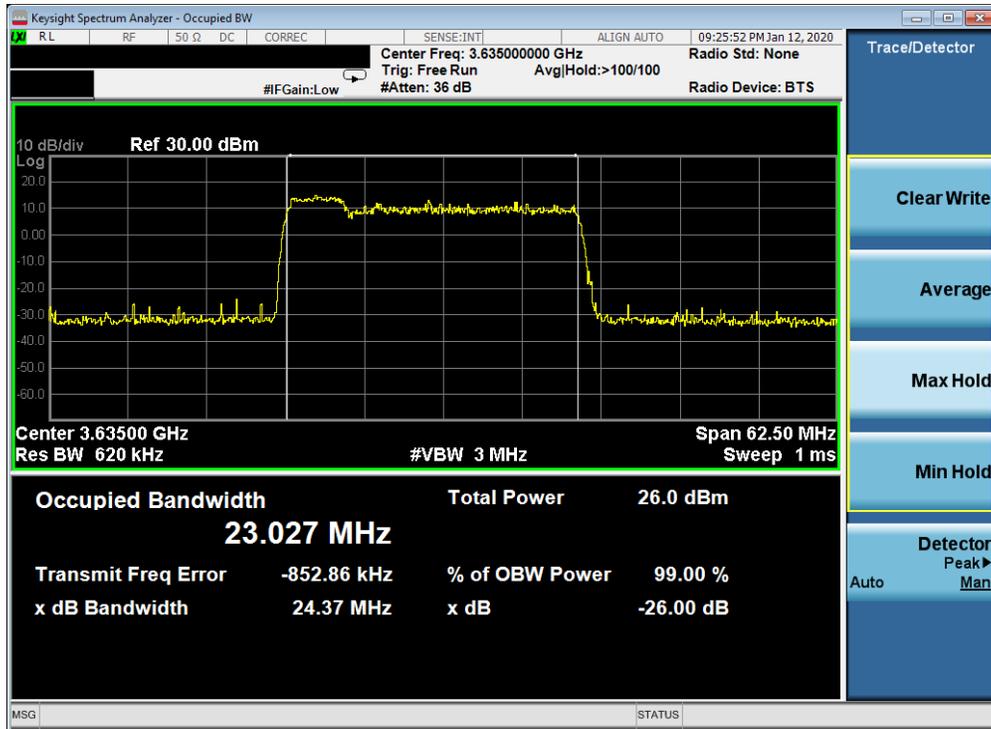


Plot 7-17. Occupied Bandwidth Plot (LTE Band 48 - 25.0MHz QPSK - Full RB Configuration)

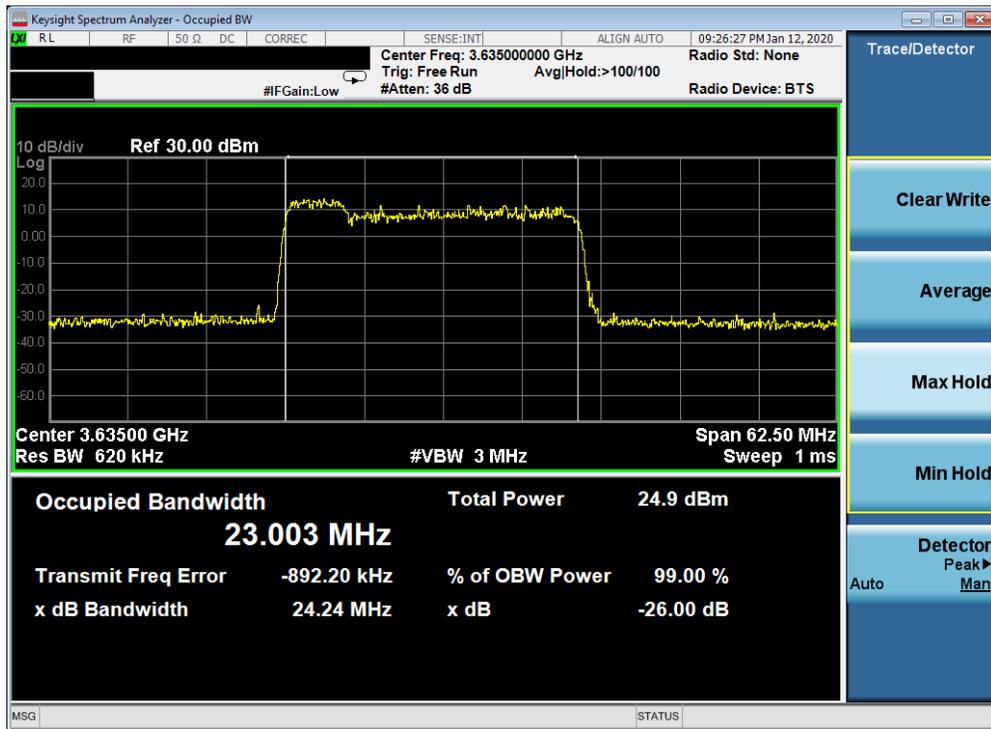

Plot 7-18. Occupied Bandwidth Plot (LTE Band 48 - 25.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 21 of 85

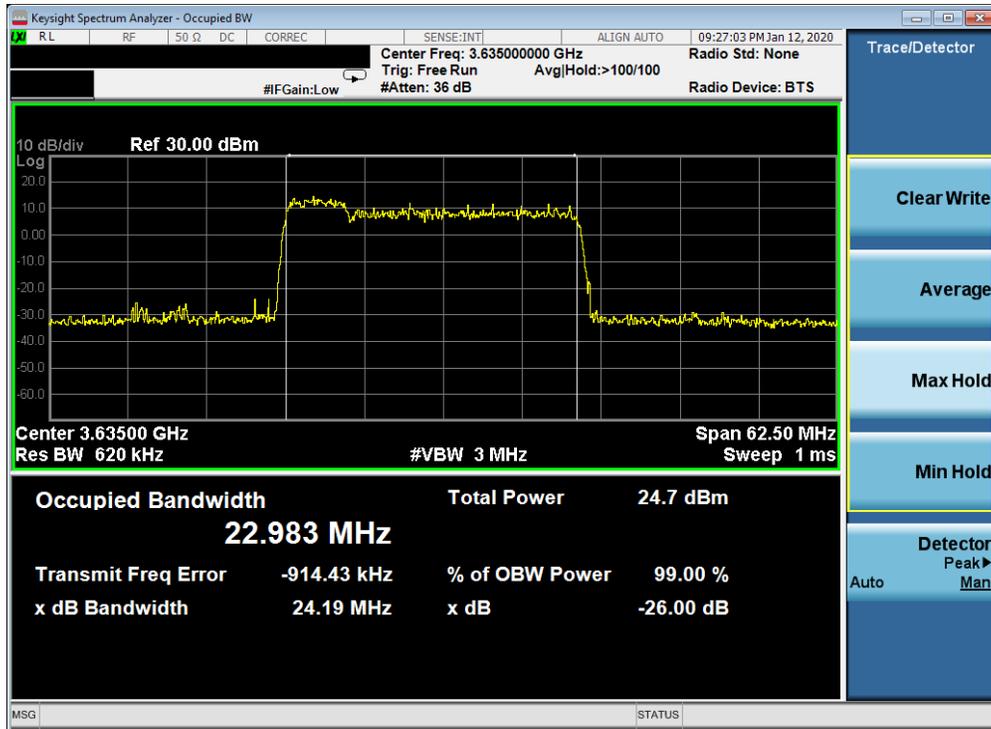


Plot 7-19. Occupied Bandwidth Plot (LTE Band 48 - 25.0MHz 64-QAM - Full RB Configuration)




Plot 7-20. Occupied Bandwidth Plot (LTE Band 48 - 25.0MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 22 of 85

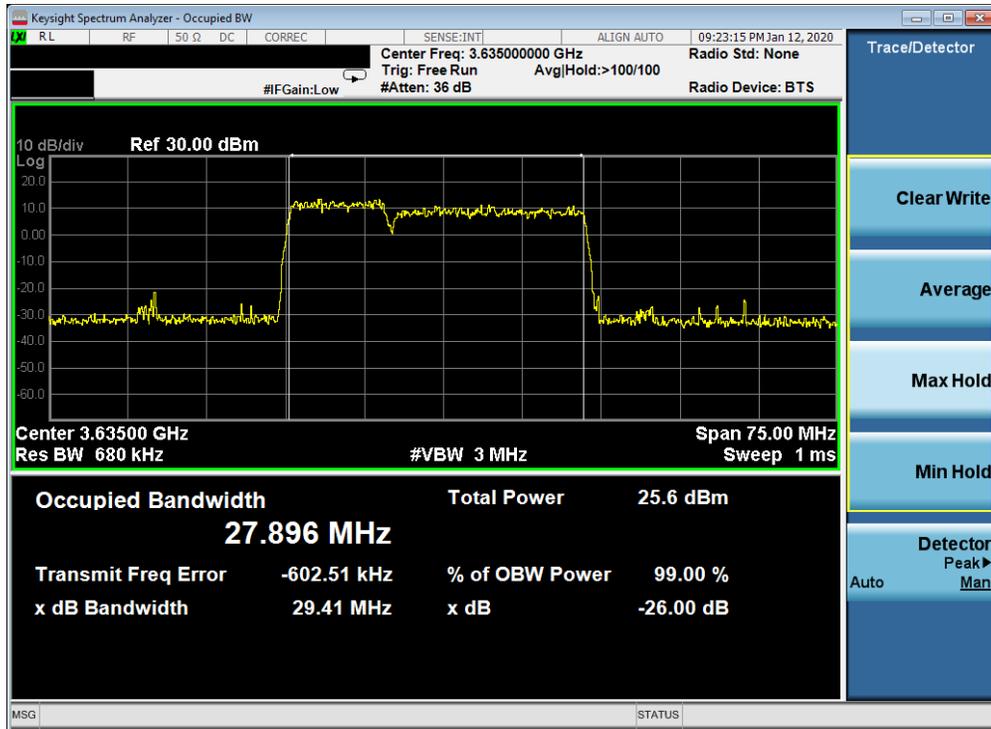


Plot 7-21. Occupied Bandwidth Plot (LTE Band 48 - 30.0MHz QPSK - Full RB Configuration)

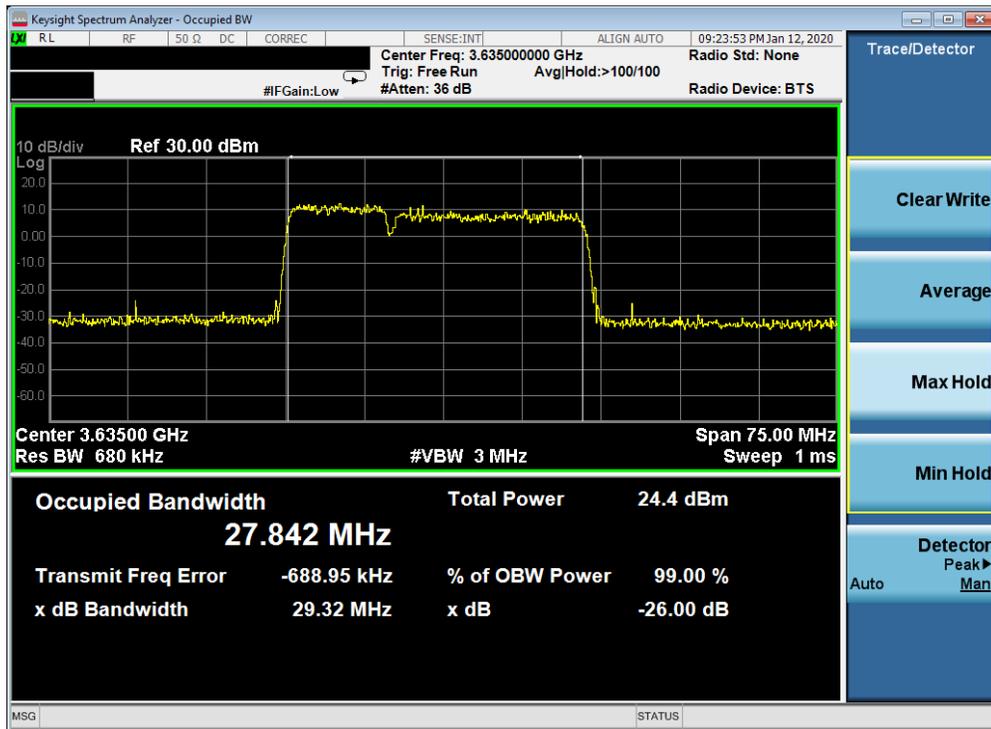

Plot 7-22. Occupied Bandwidth Plot (LTE Band 48 - 30.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 23 of 85

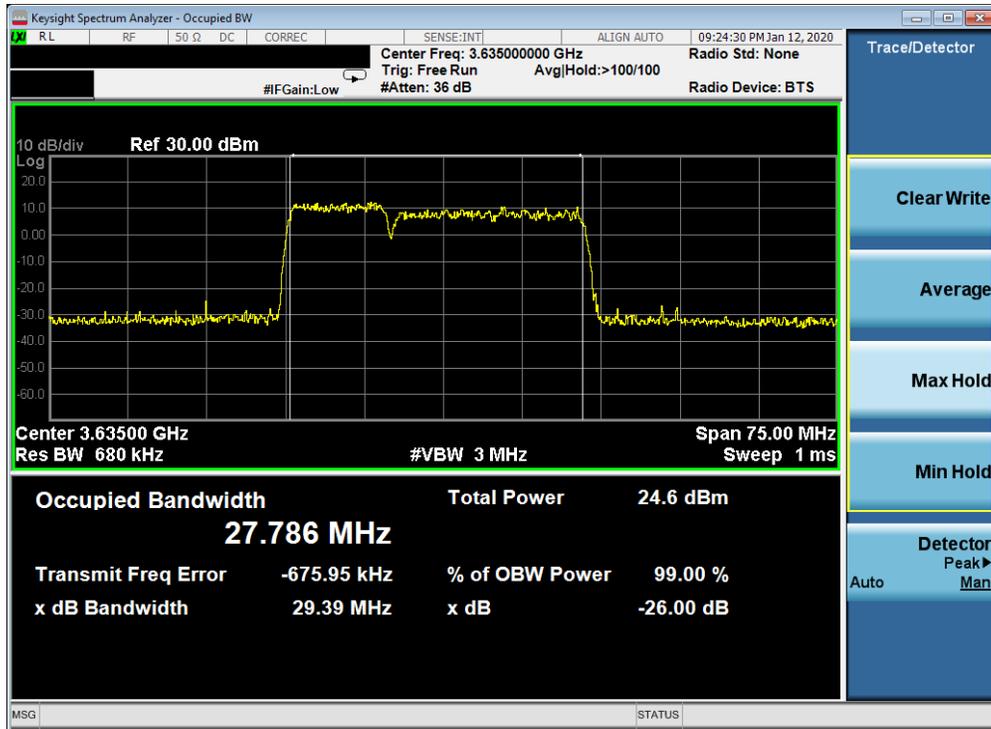


Plot 7-23. Occupied Bandwidth Plot (LTE Band 48 - 30.0MHz 64-QAM - Full RB Configuration)




Plot 7-24. Occupied Bandwidth Plot (LTE Band 48 - 30.0MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 24 of 85

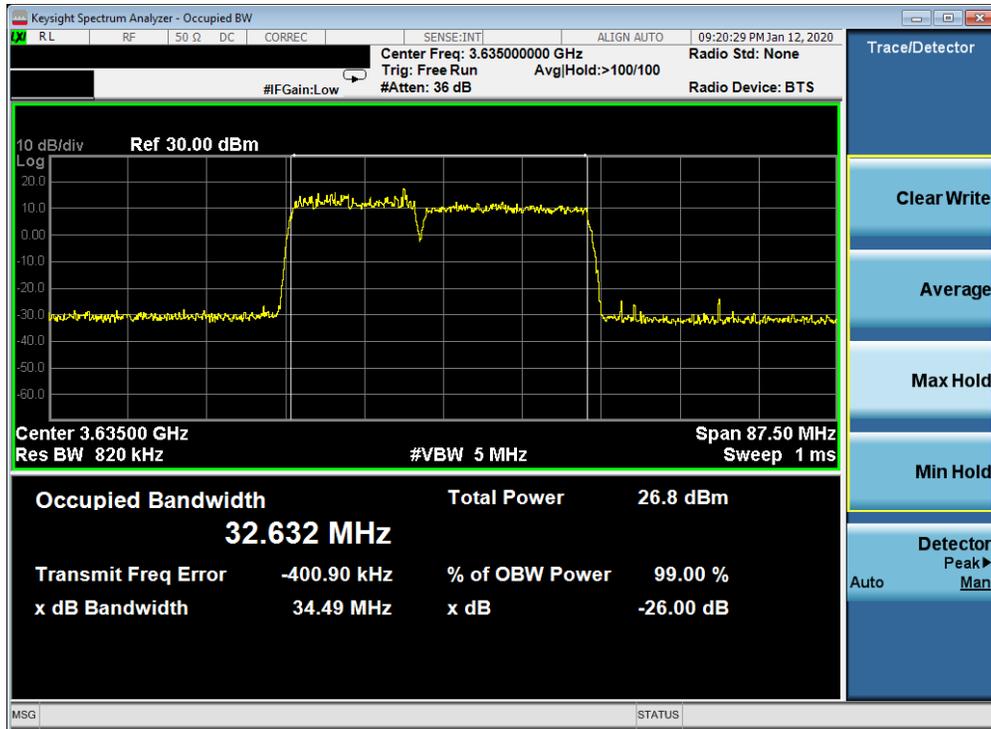


Plot 7-25. Occupied Bandwidth Plot (LTE Band 48 - 35.0MHz QPSK - Full RB Configuration)

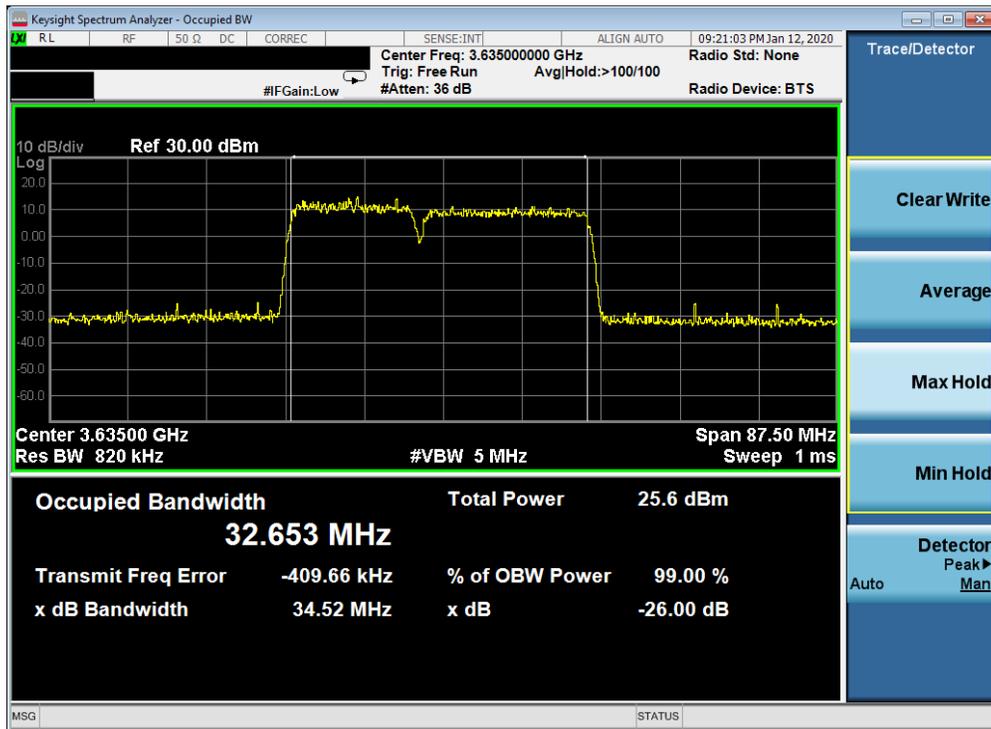


Plot 7-26. Occupied Bandwidth Plot (LTE Band 48 - 35.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 25 of 85

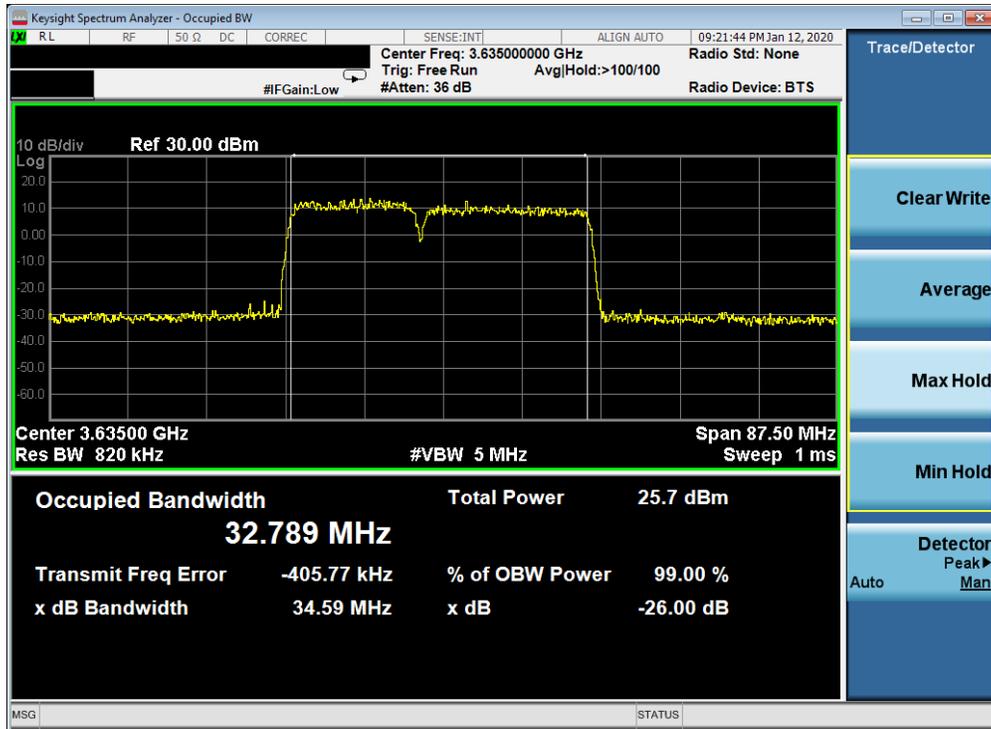


Plot 7-27. Occupied Bandwidth Plot (LTE Band 48 - 35.0MHz 64-QAM - Full RB Configuration)

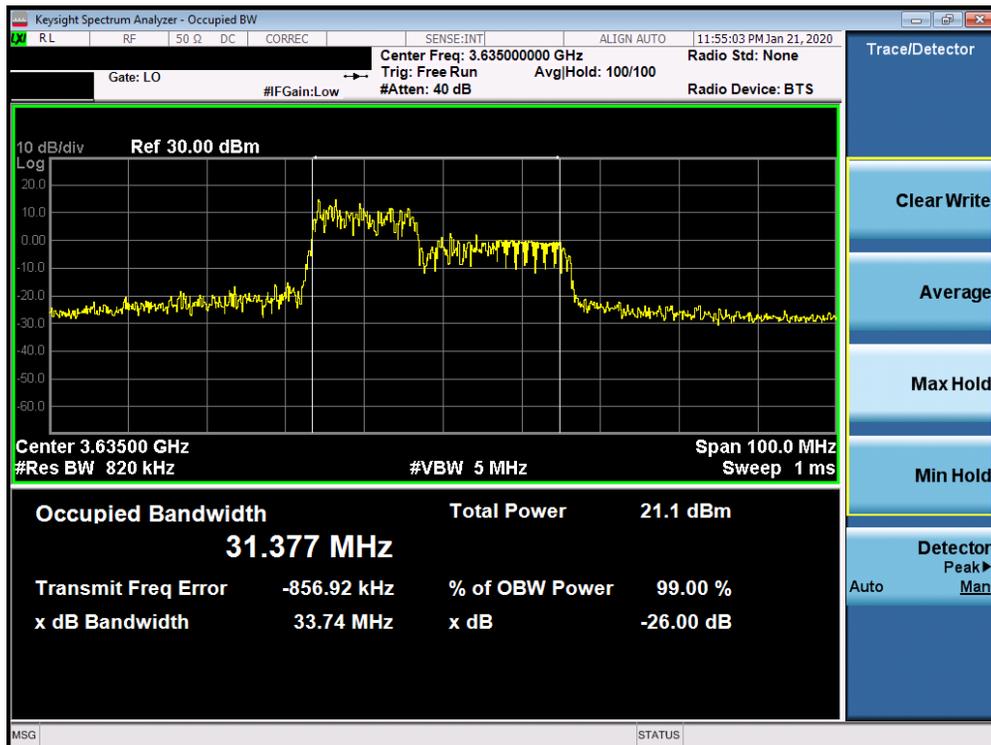


Plot 7-28. Occupied Bandwidth Plot (LTE Band 48 - 35.0MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 26 of 85

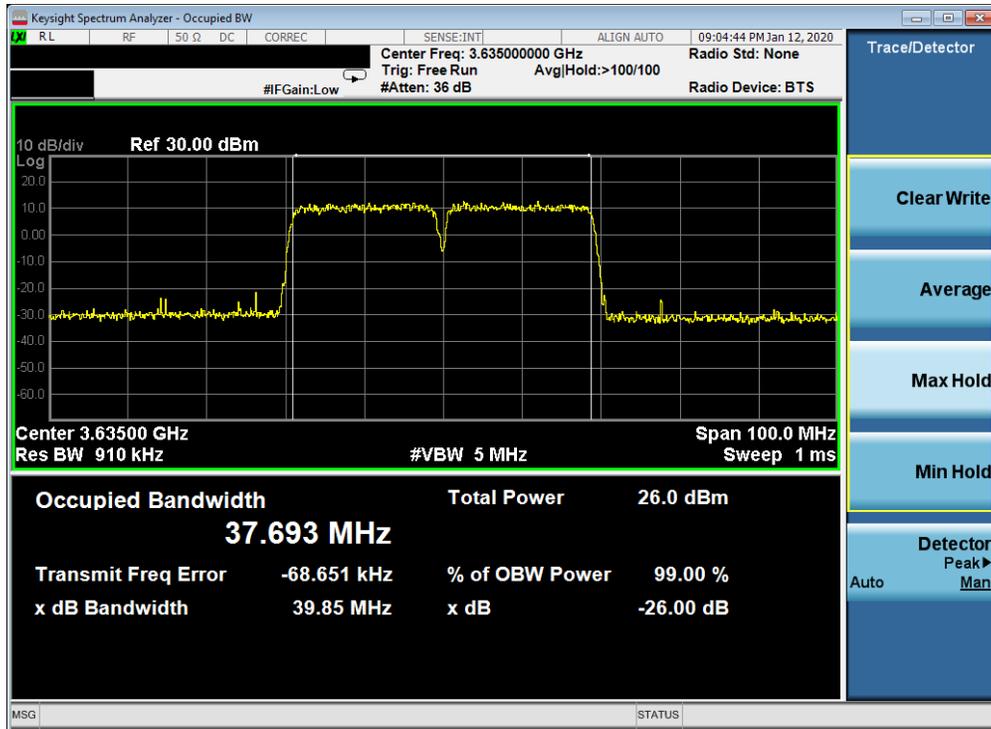


Plot 7-29. Occupied Bandwidth Plot (LTE Band 48 - 40.0MHz QPSK - Full RB Configuration)

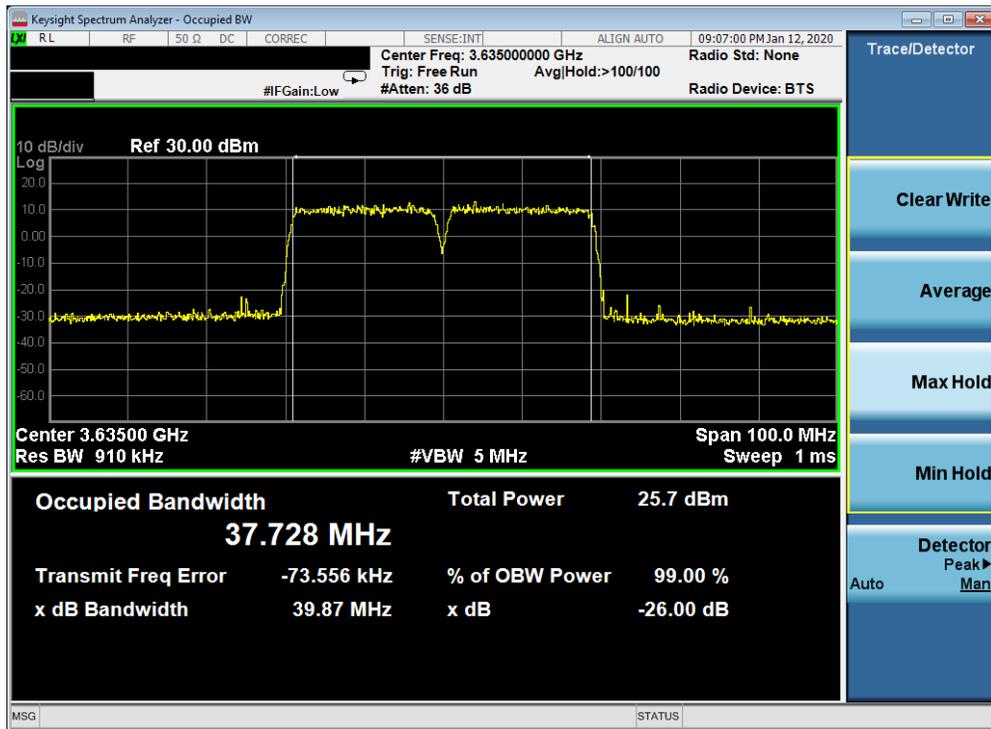


Plot 7-30. Occupied Bandwidth Plot (LTE Band 48 - 40.0MHz 16-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 27 of 85

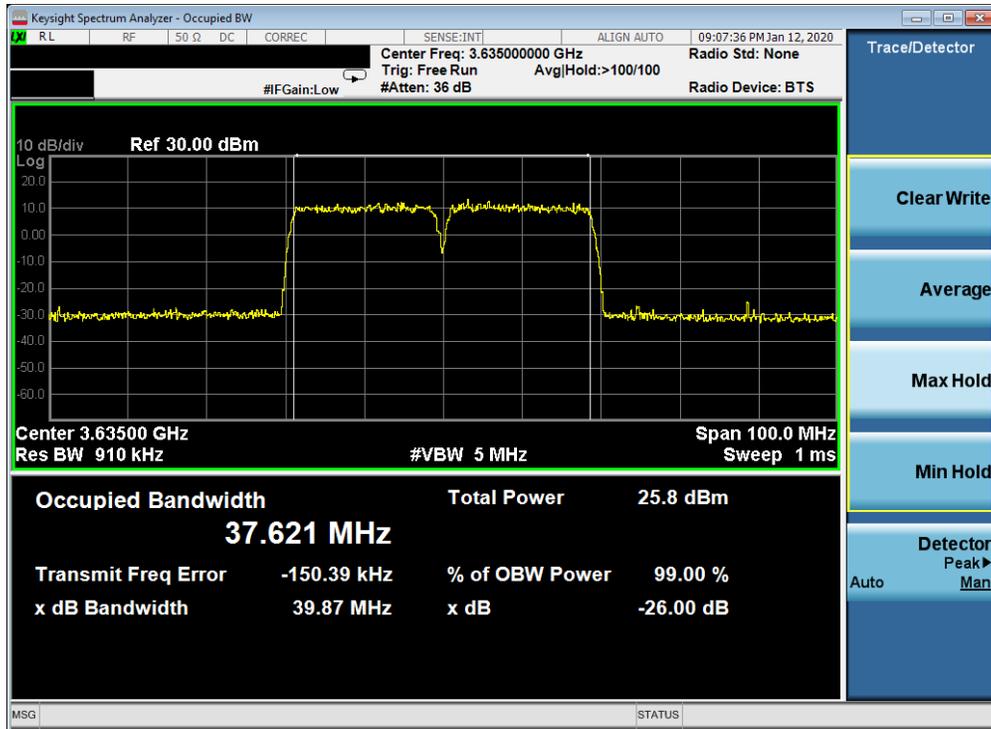

Plot 7-31. Occupied Bandwidth Plot (LTE Band 48 - 40.0MHz 64-QAM - Full RB Configuration)

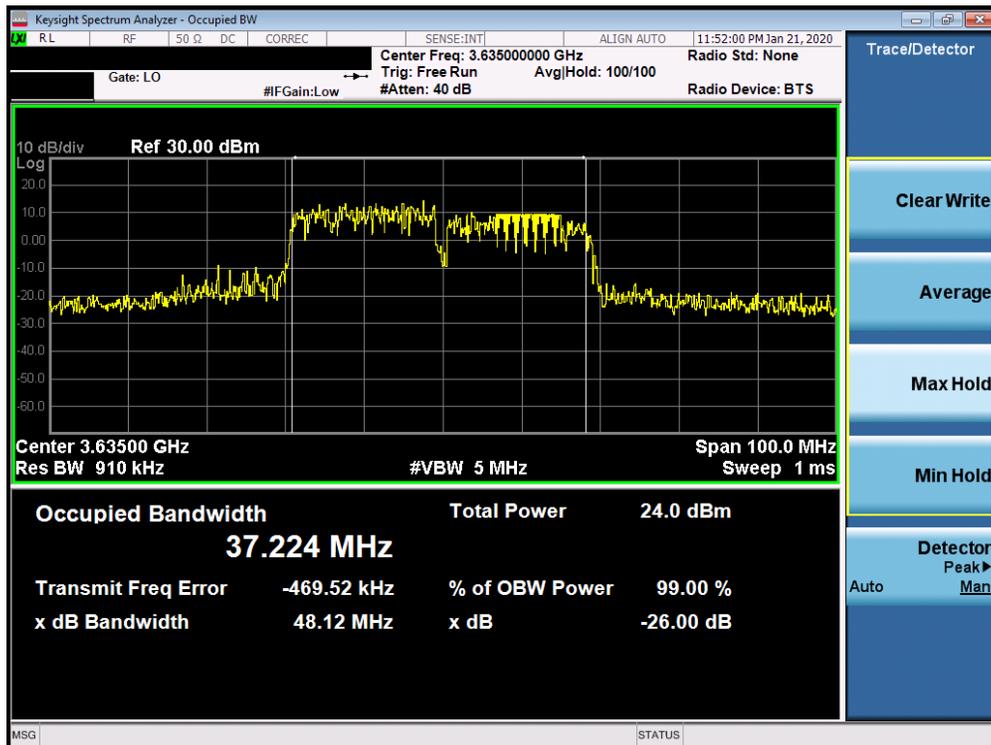

Plot 7-32. Occupied Bandwidth Plot (LTE Band 48 - 40.0MHz 256-QAM - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 28 of 85

7.3 Spurious and Harmonic Emissions at Antenna Terminal §2.1051 §96.41(e)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/Mhz.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = Max Hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

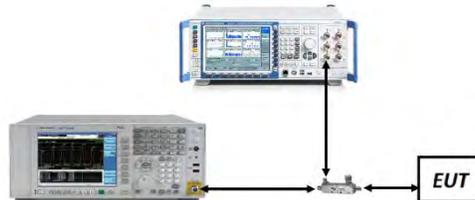



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 29 of 85	

LTE Band 48

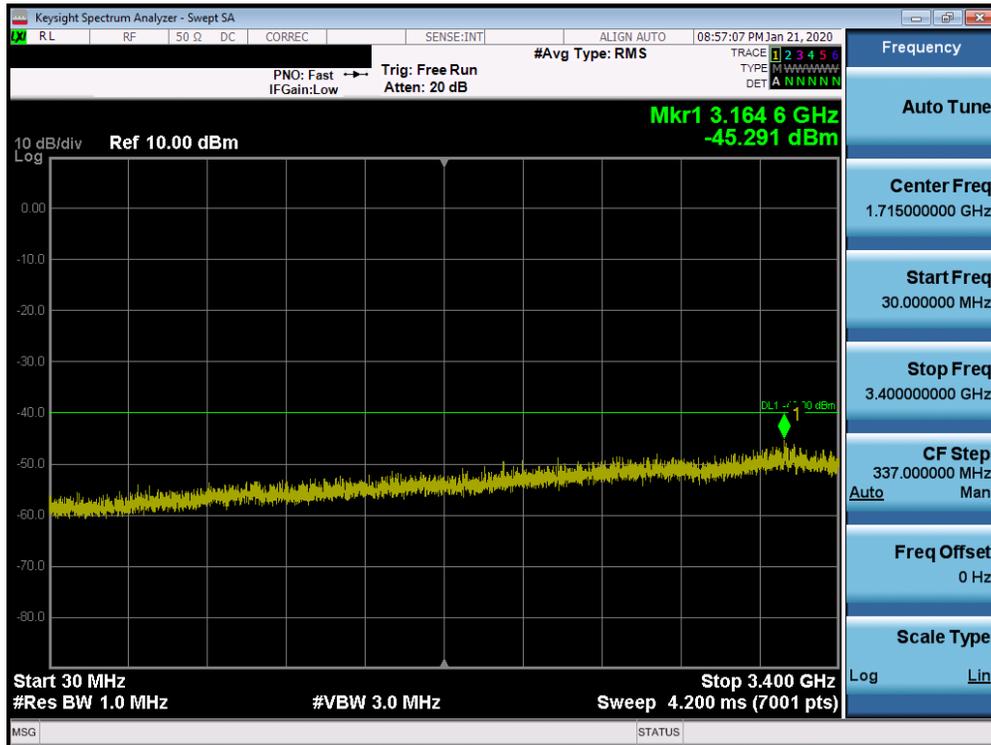


Plot 7-33. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

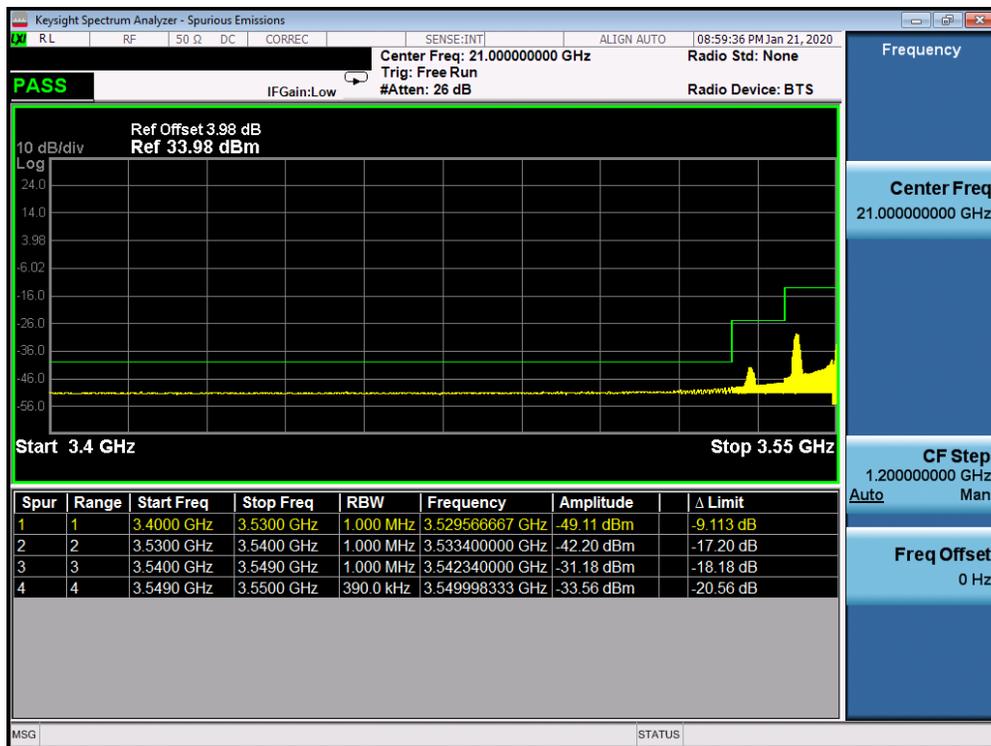


Plot 7-34. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 30 of 85

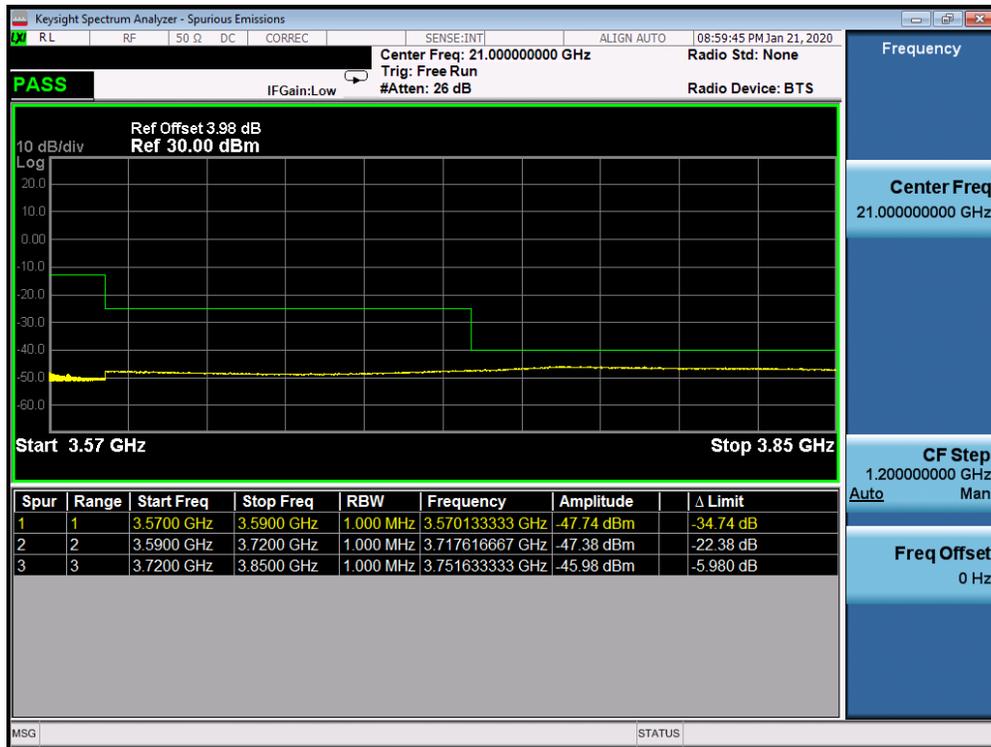


Plot 7-35. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

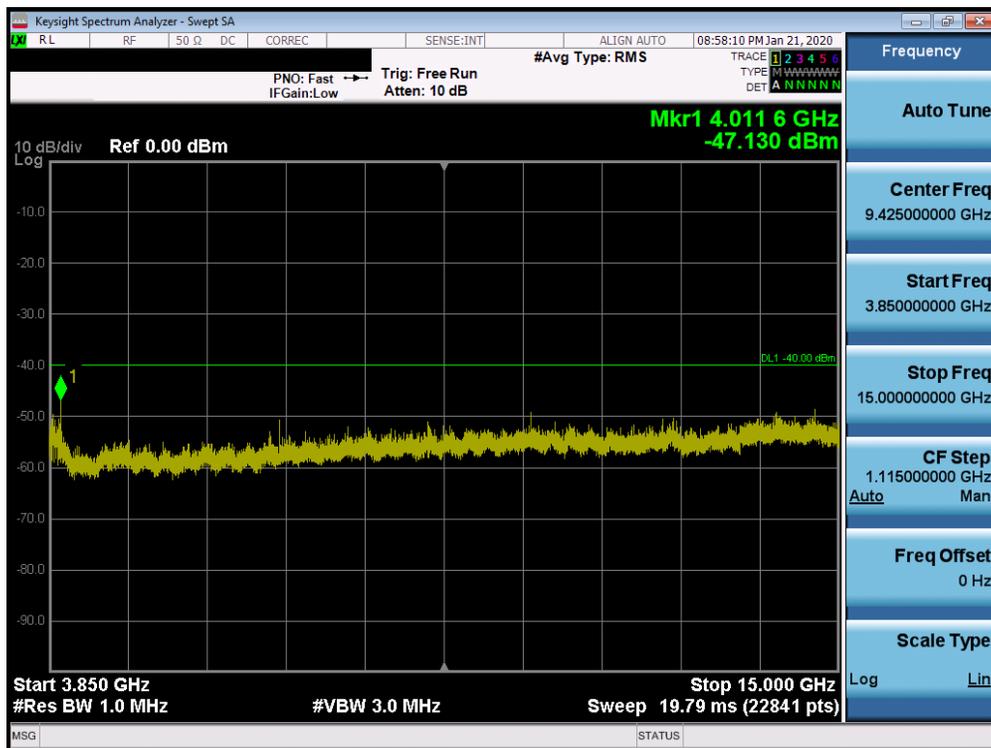


Plot 7-36. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 31 of 85

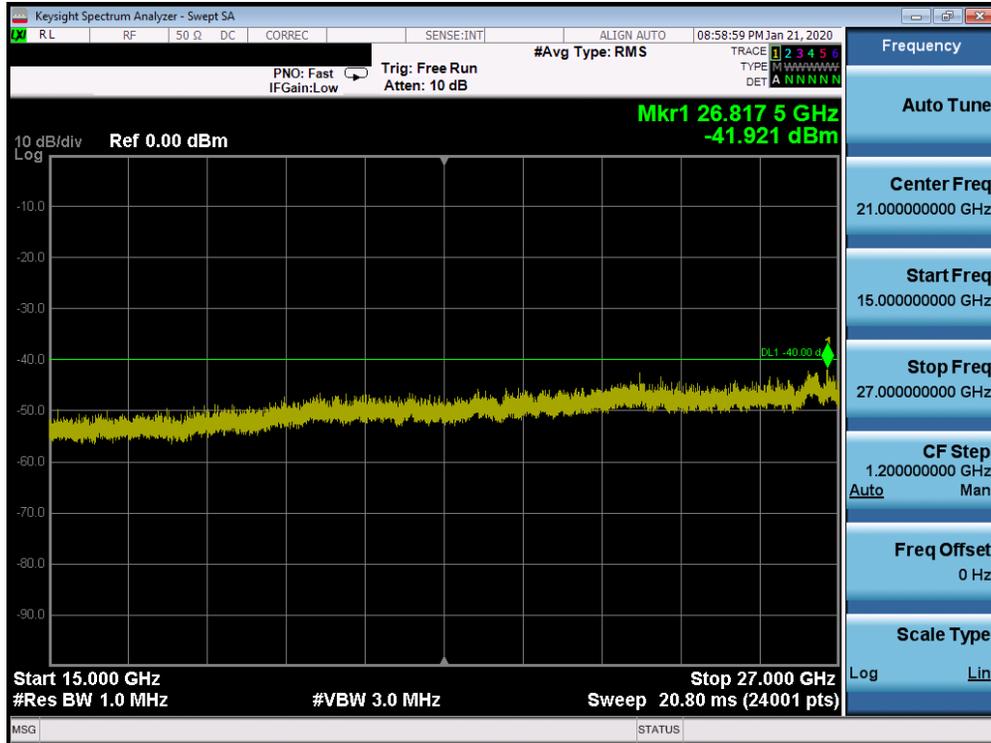


Plot 7-37. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

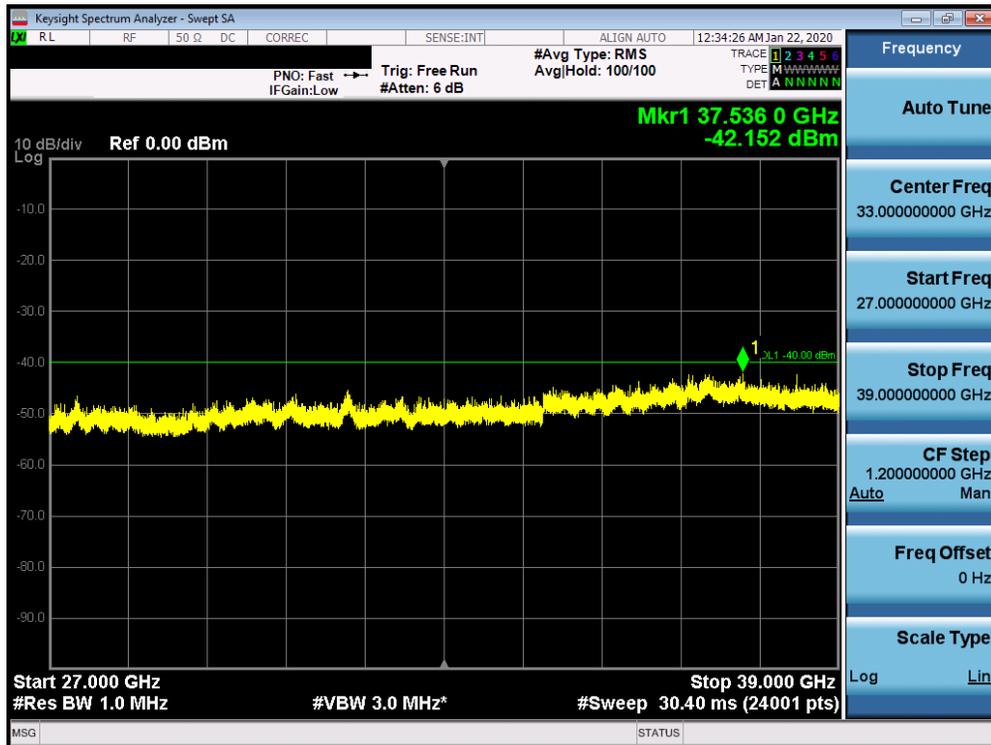


Plot 7-38. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 32 of 85

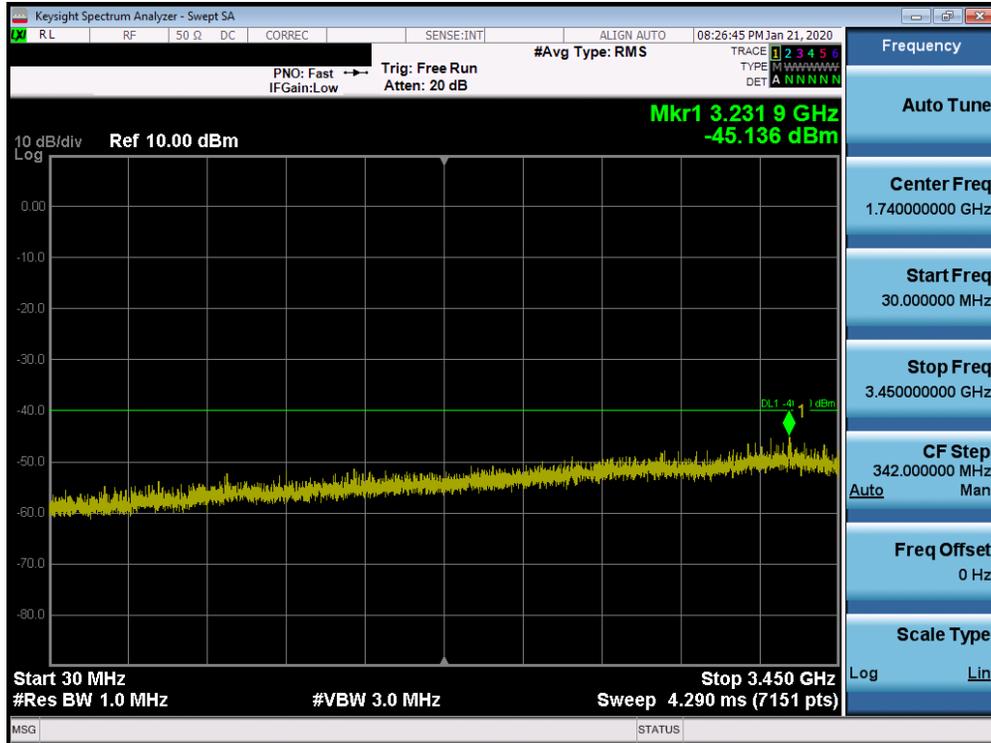


Plot 7-39. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

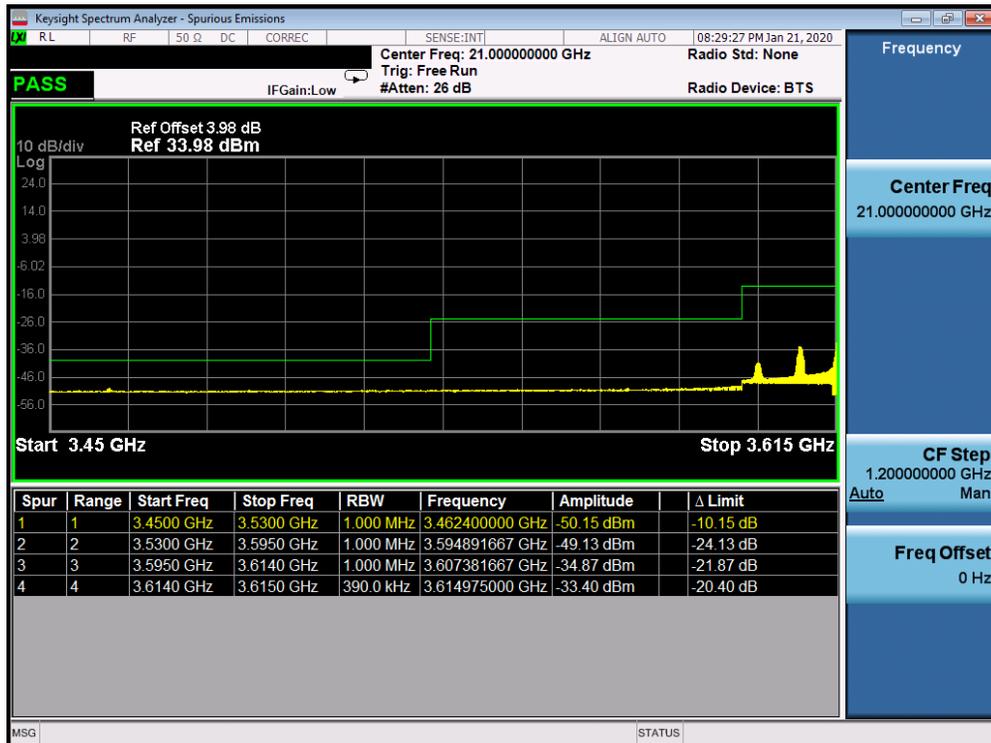


Plot 7-40. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 33 of 85

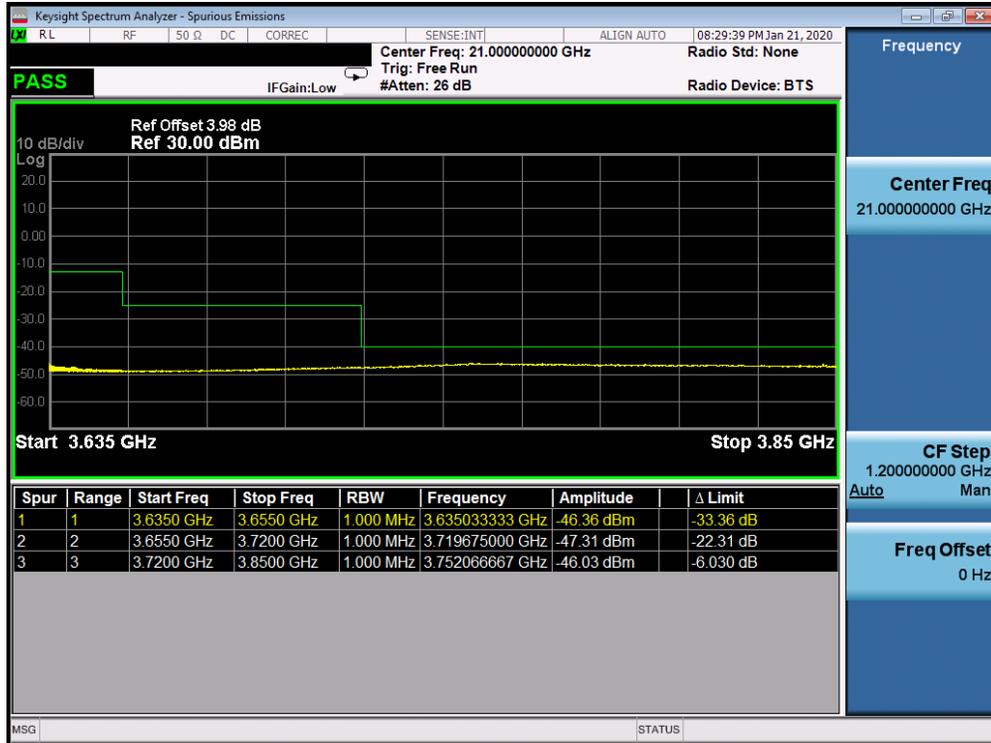


Plot 7-41. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

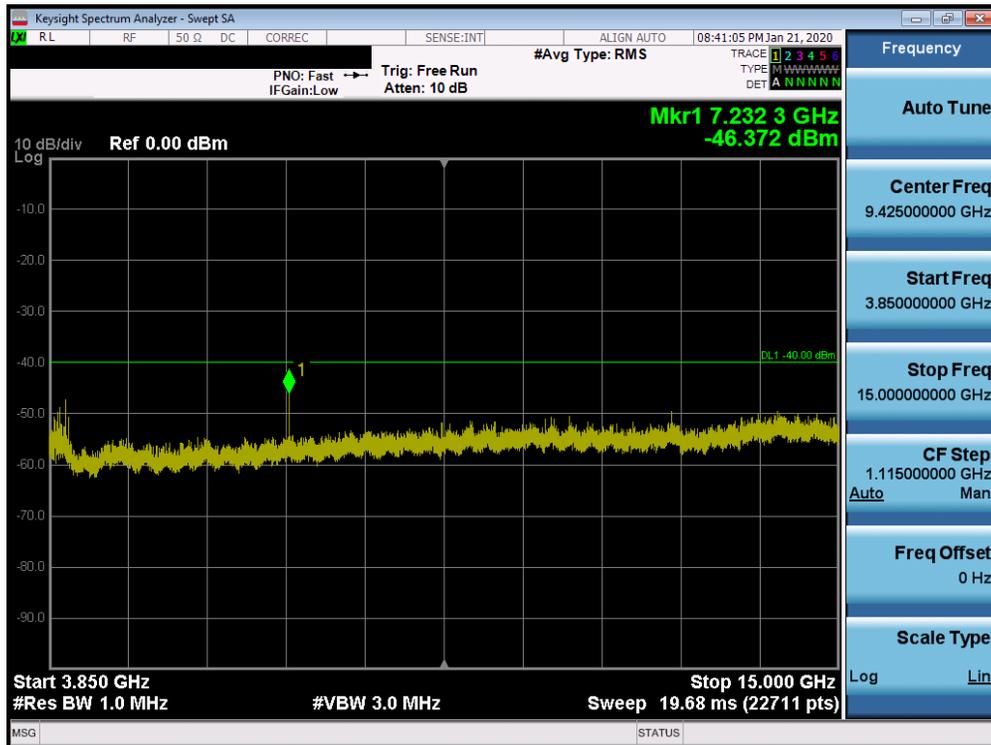


Plot 7-42. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 34 of 85

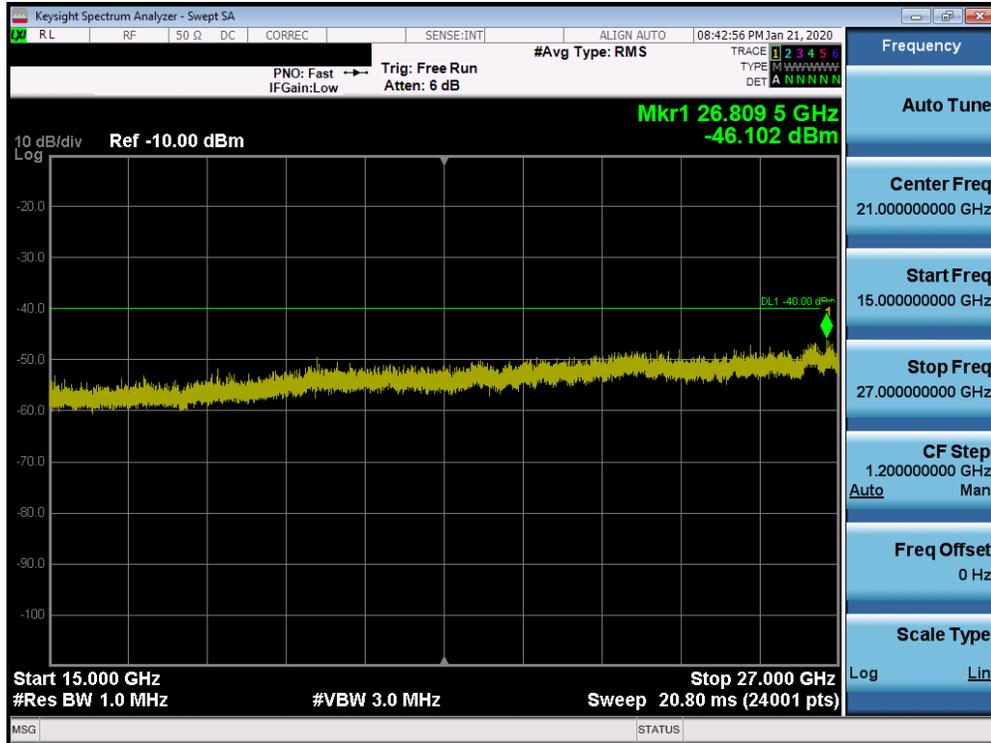


Plot 7-43. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

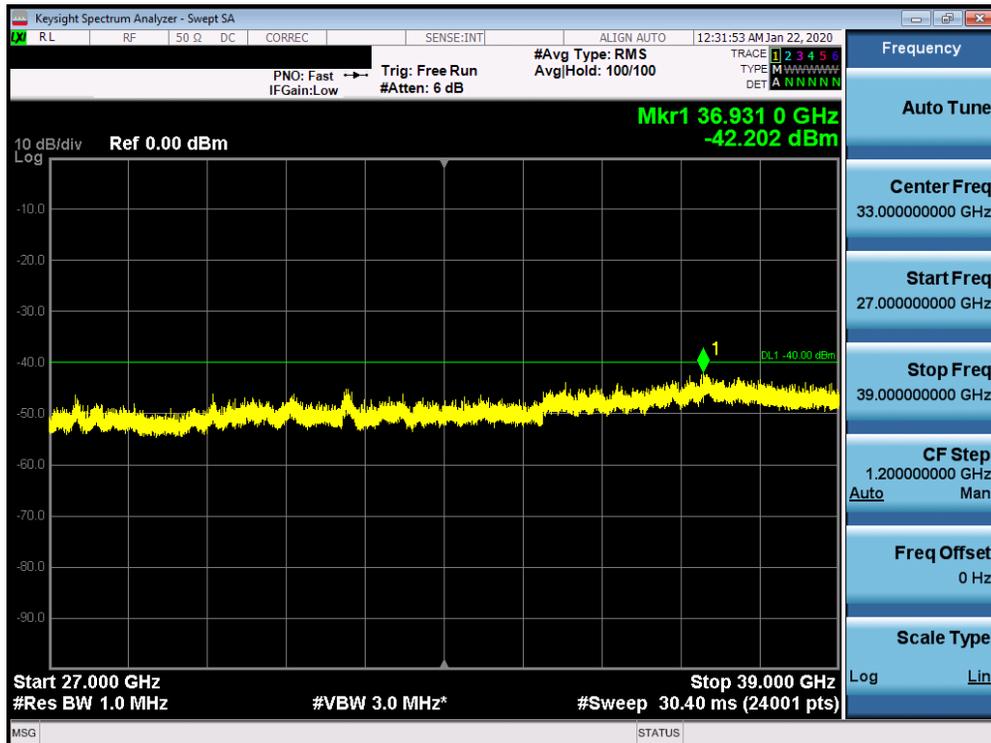


Plot 7-44. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 35 of 85

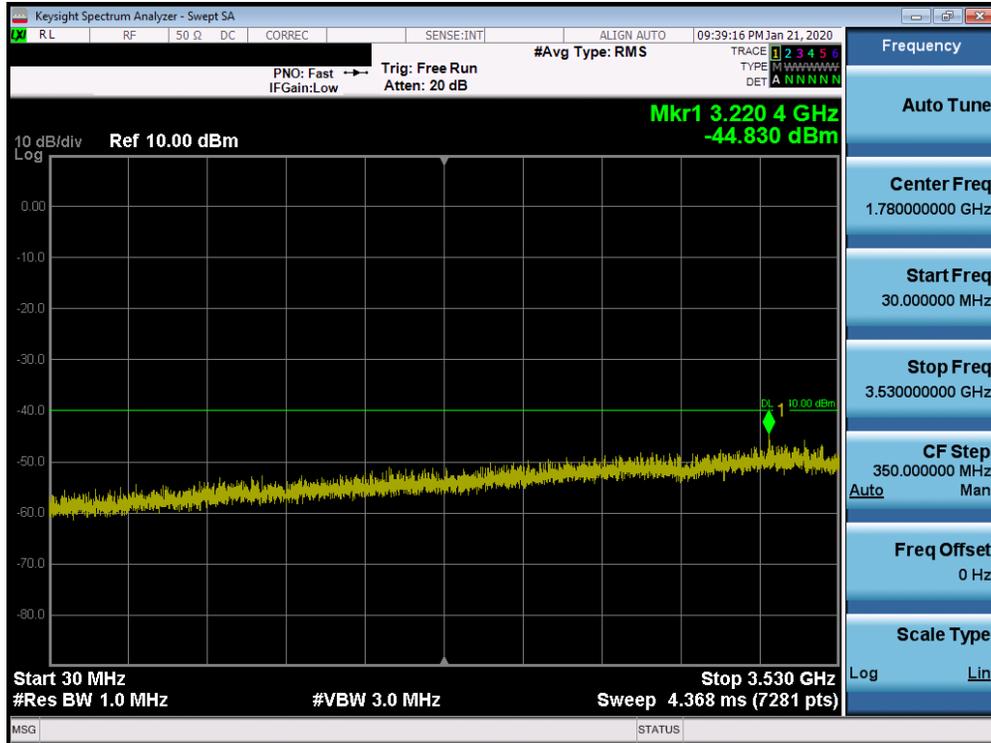


Plot 7-45. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99- High Channel)

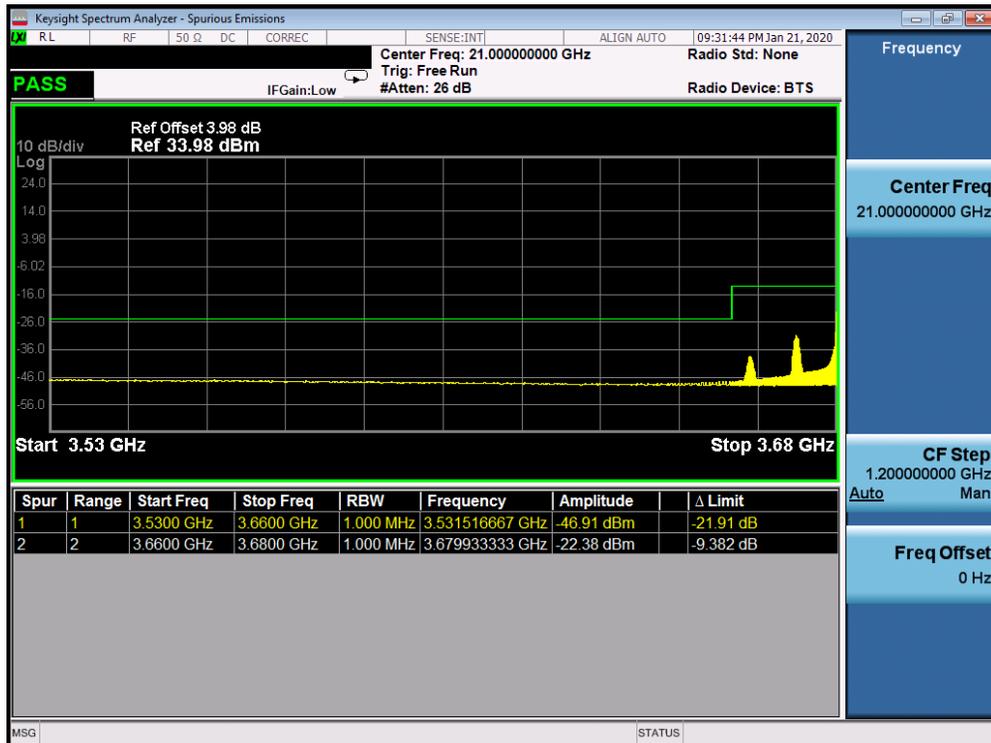


Plot 7-46. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99- High Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 36 of 85

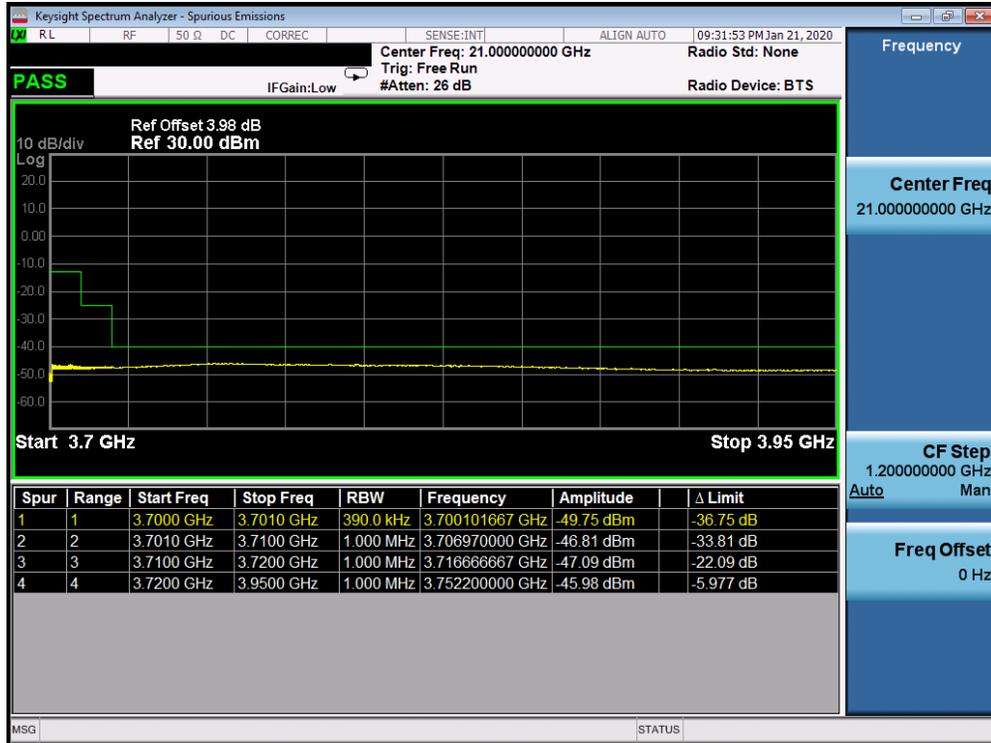


Plot 7-47. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99 - High Channel)

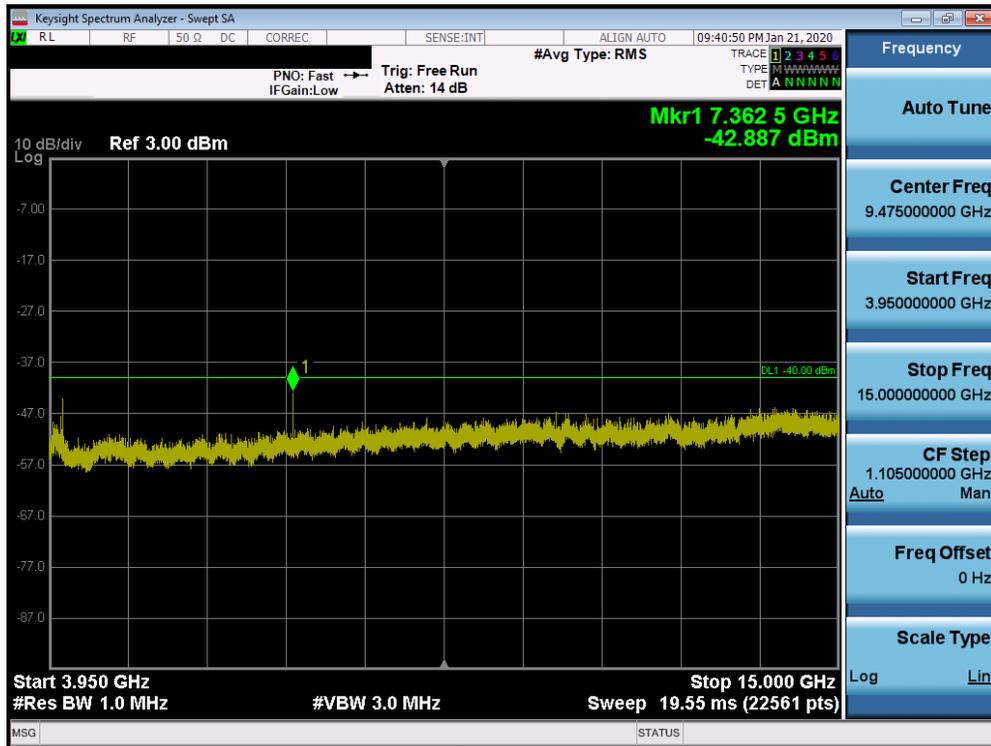


Plot 7-48. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99- High Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 37 of 85

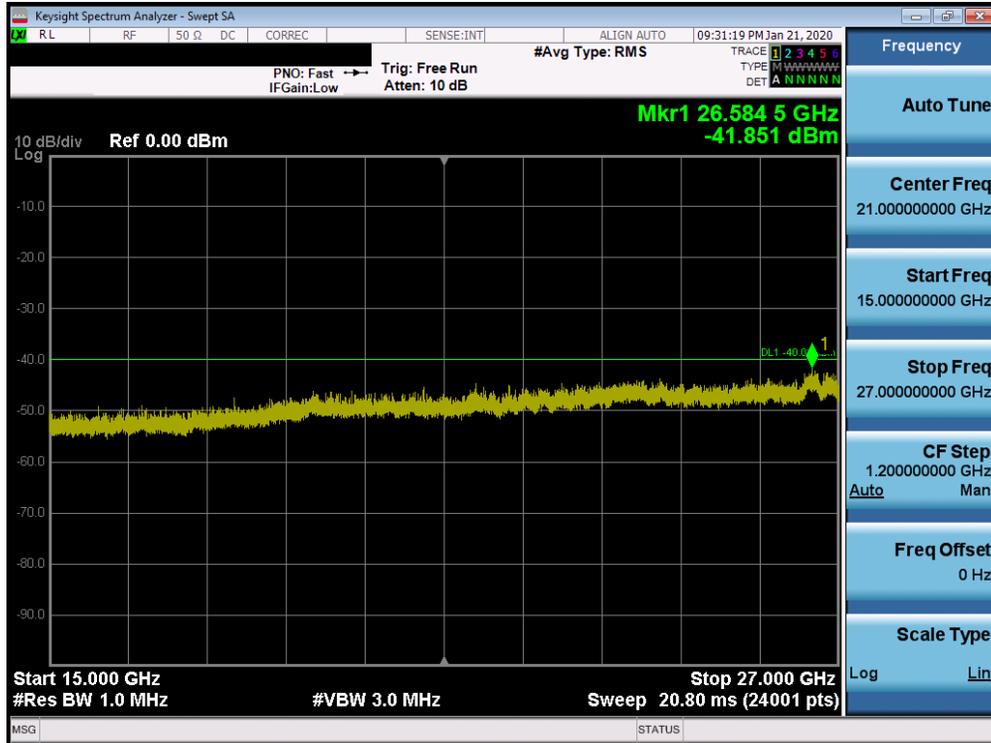

Plot 7-49. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99- High Channel)

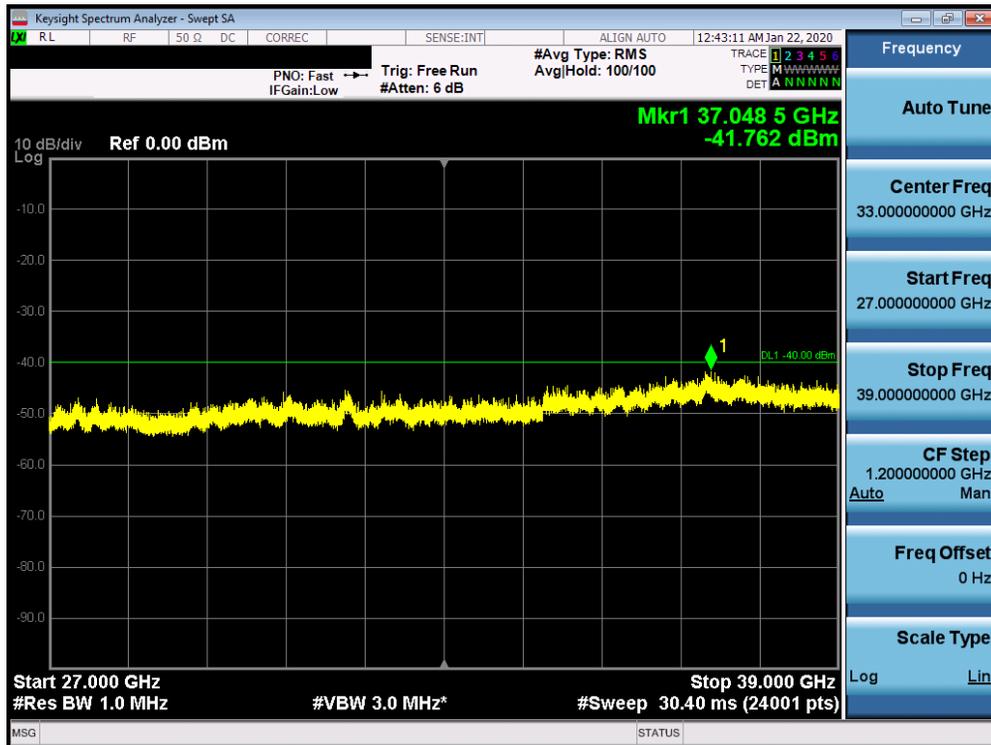

Plot 7-50. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99 - High Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 38 of 85

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §96.41(e)(ii)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B MHz (where B is the bandwidth in MHz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B MHz below the lower CBSD-assigned channel edge. At all frequencies greater than B MHz above the upper CBSD assigned channel edge and less than B MHz below the lower CBSD-assigned channel edge, the conducted power of any end user device emission shall not exceed -25 dBm/MHz. The conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

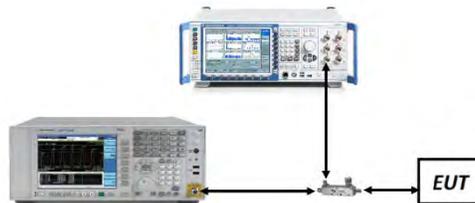



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 39 of 85

LTE Band 48

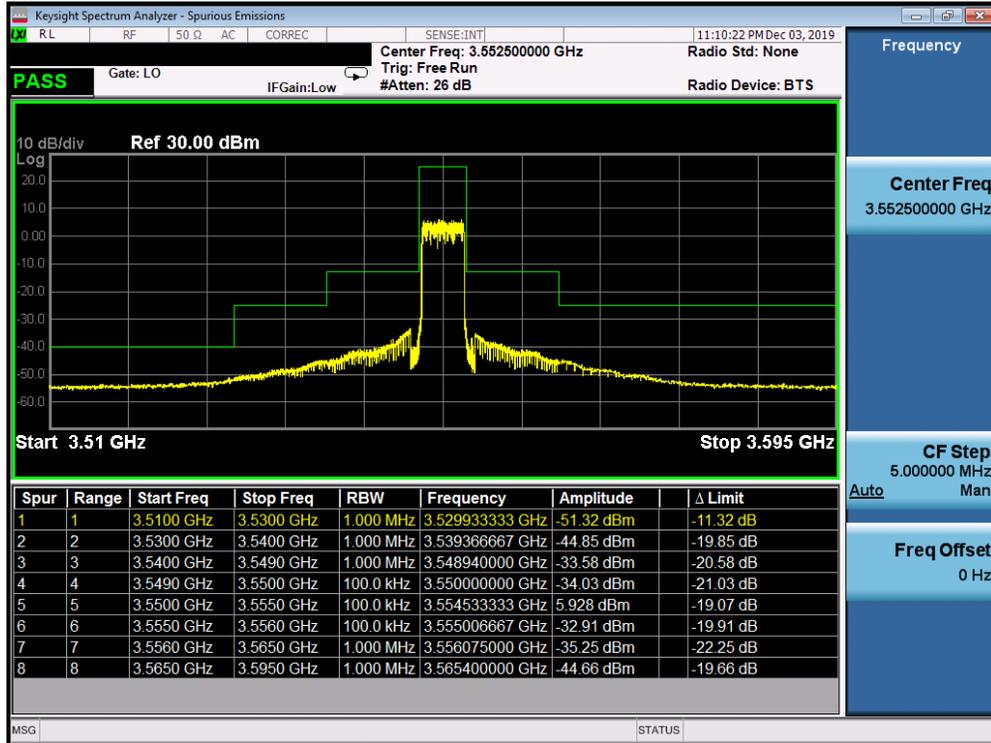


Plot 7-51. Lower ACP Plot (LTE Band 48 - 5.0MHz QPSK - Full RB Configuration)

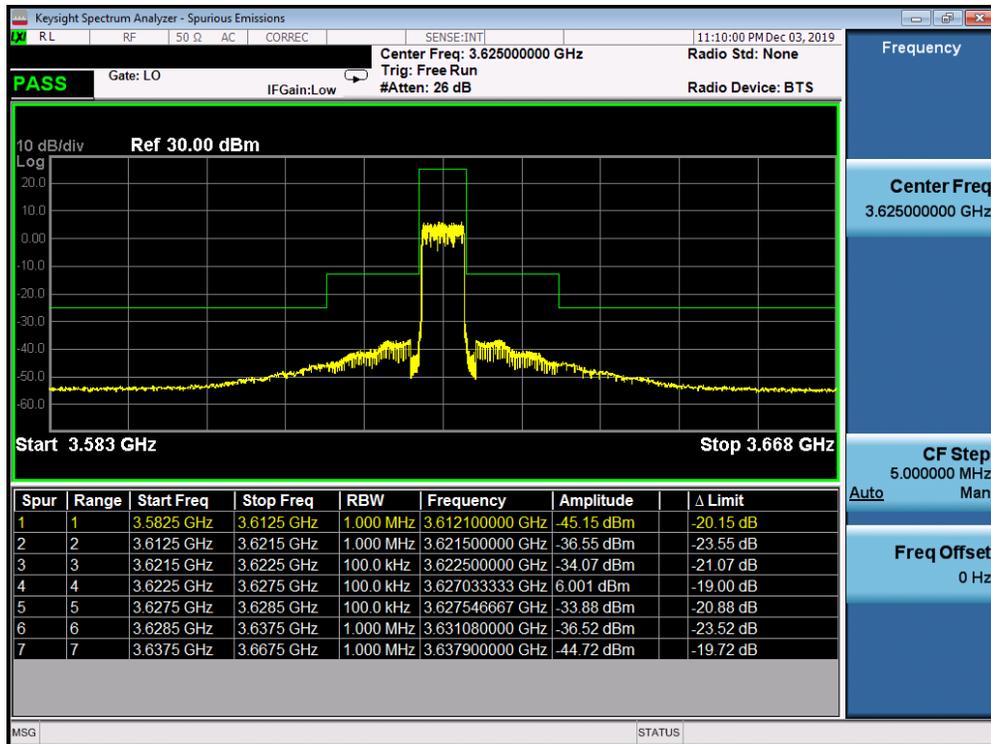


Plot 7-52. Mid ACP Plot (LTE Band 48 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 40 of 85

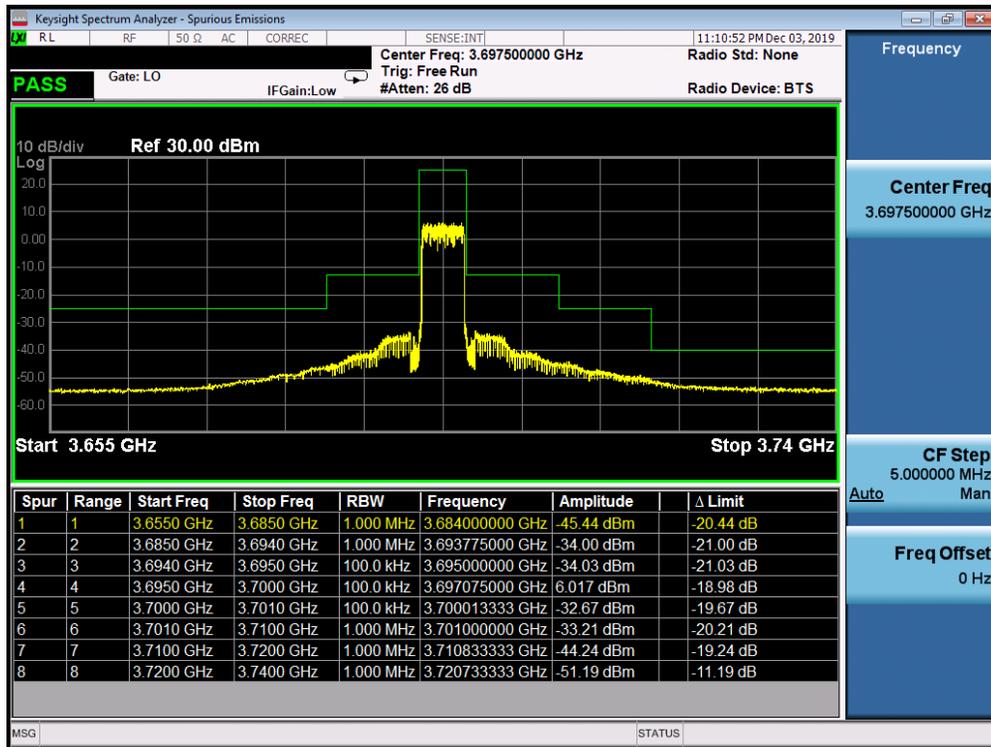


Plot 7-53. Upper ACP Plot (LTE Band 48 - 5.0MHz QPSK - Full RB Configuration)

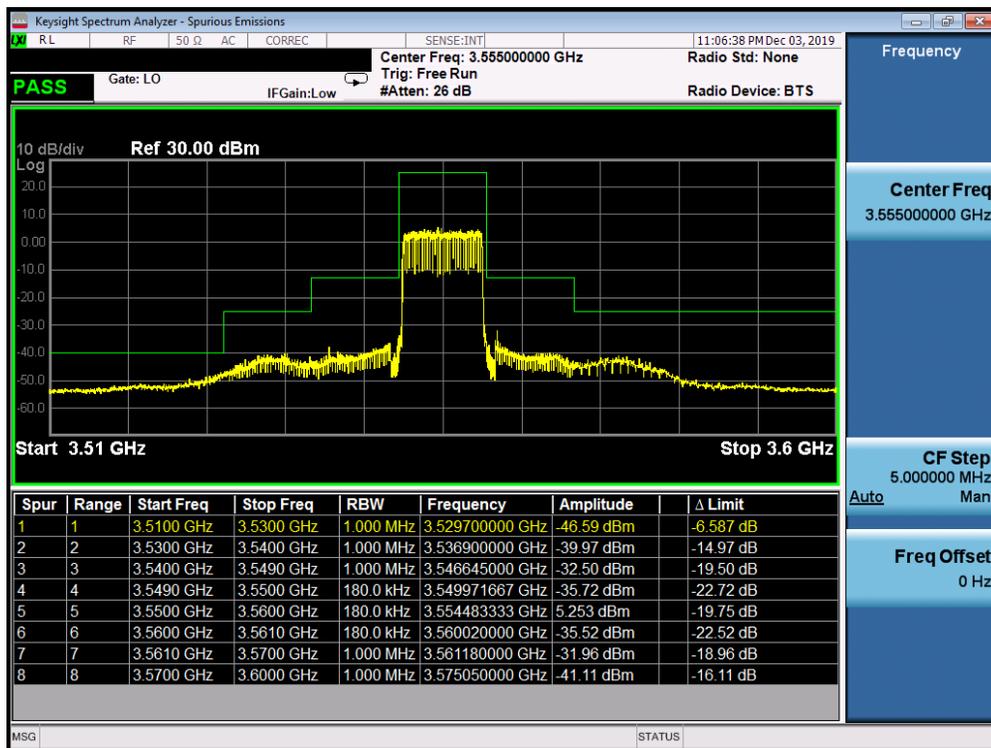


Plot 7-54. Lower ACP Plot (LTE Band 48 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 41 of 85

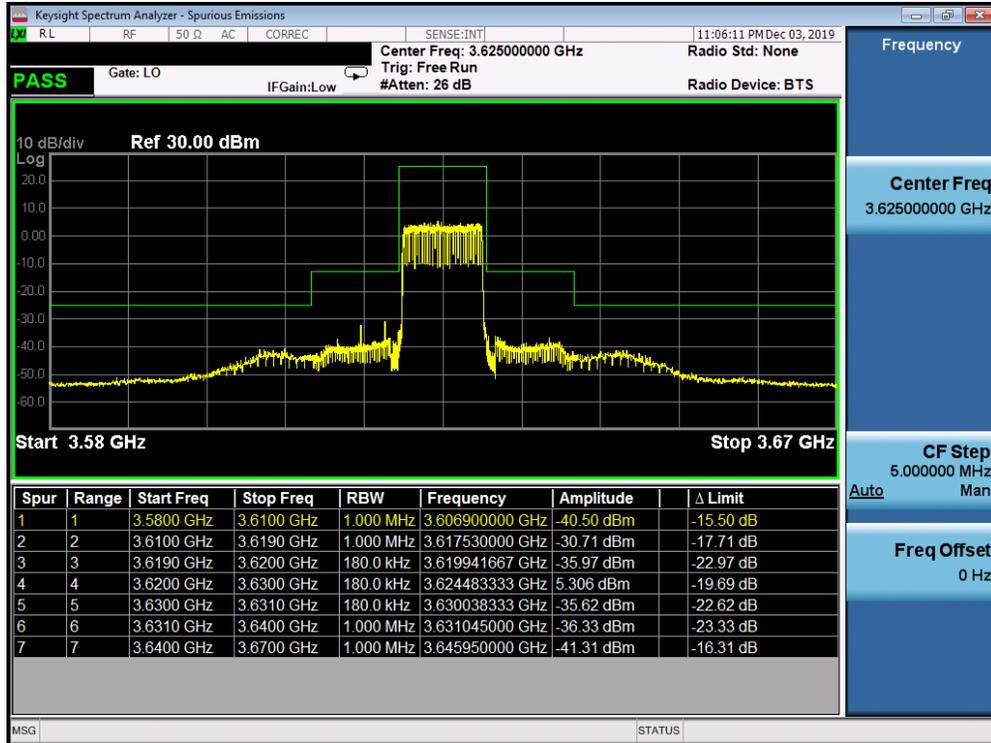


Plot 7-55. Mid ACP Plot (LTE Band 48 - 10.0MHz QPSK - Full RB Configuration)

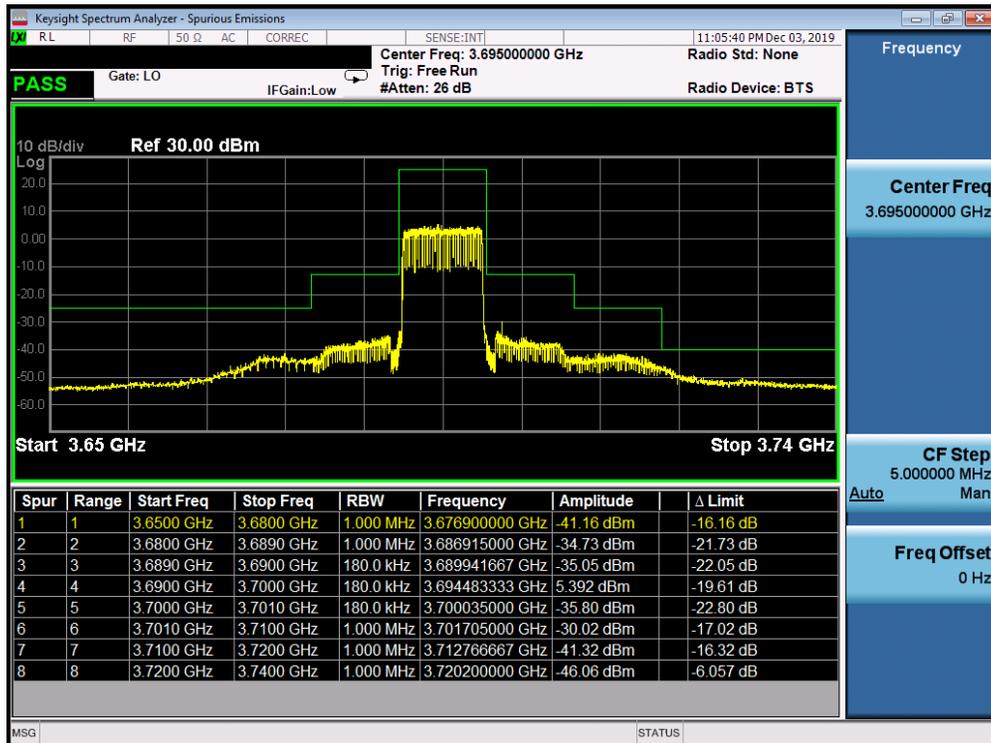


Plot 7-56. Upper ACP Plot (LTE Band 48 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 42 of 85

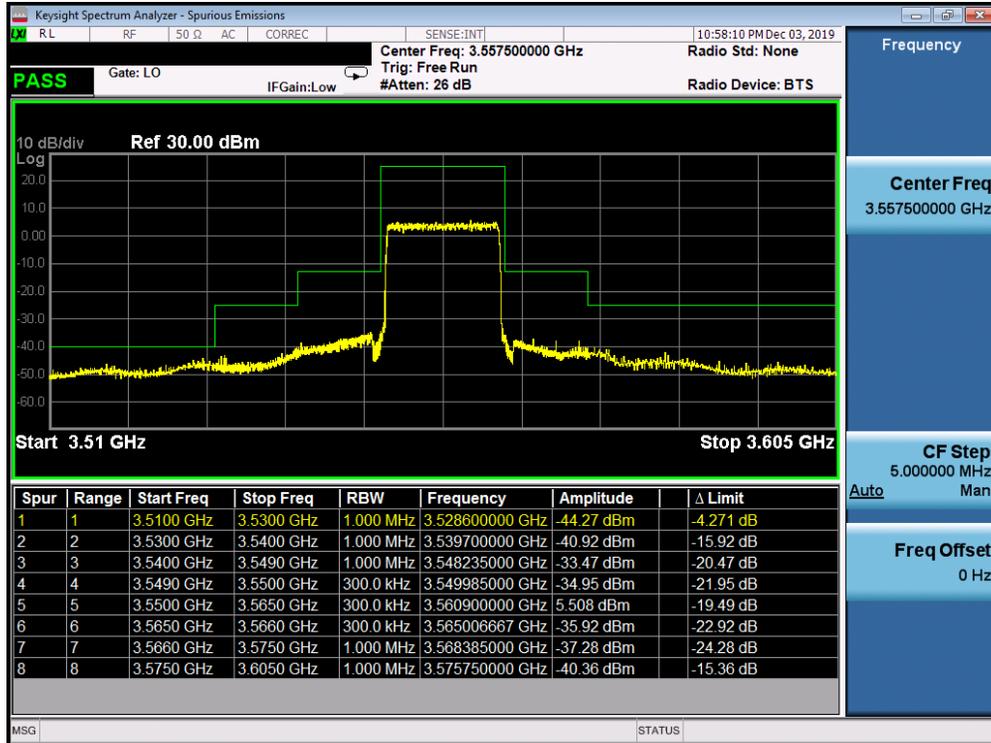


Plot 7-57. Lower ACP Plot (LTE Band 48 - 15.0MHz QPSK - Full RB Configuration)

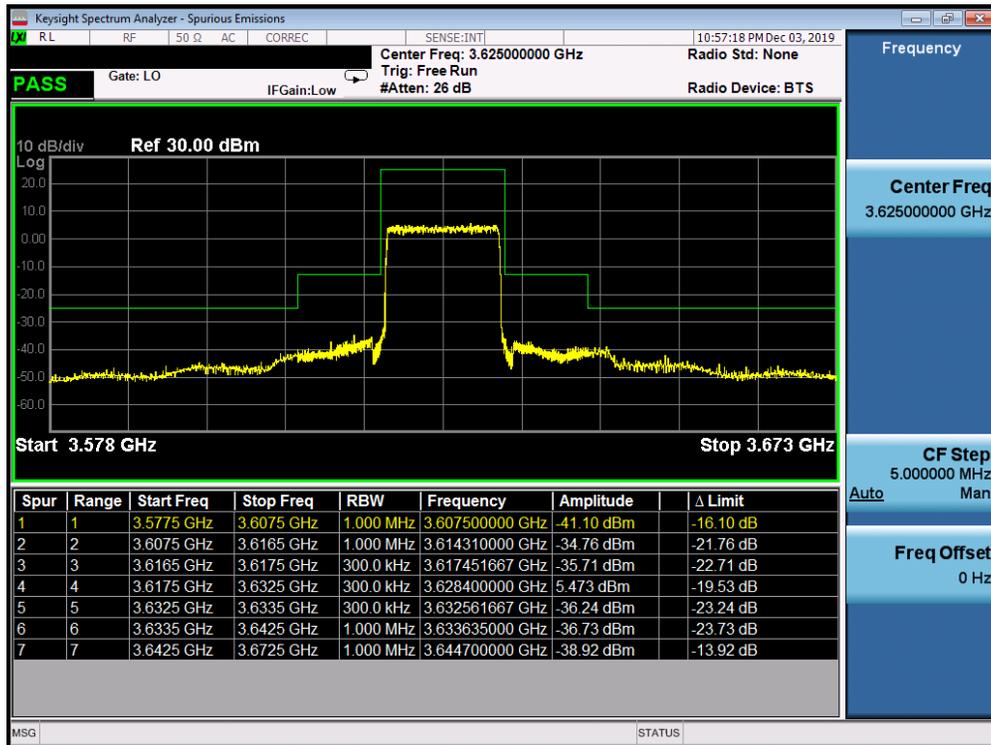


Plot 7-58. Mid ACP Plot (LTE Band 48 - 15.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 43 of 85

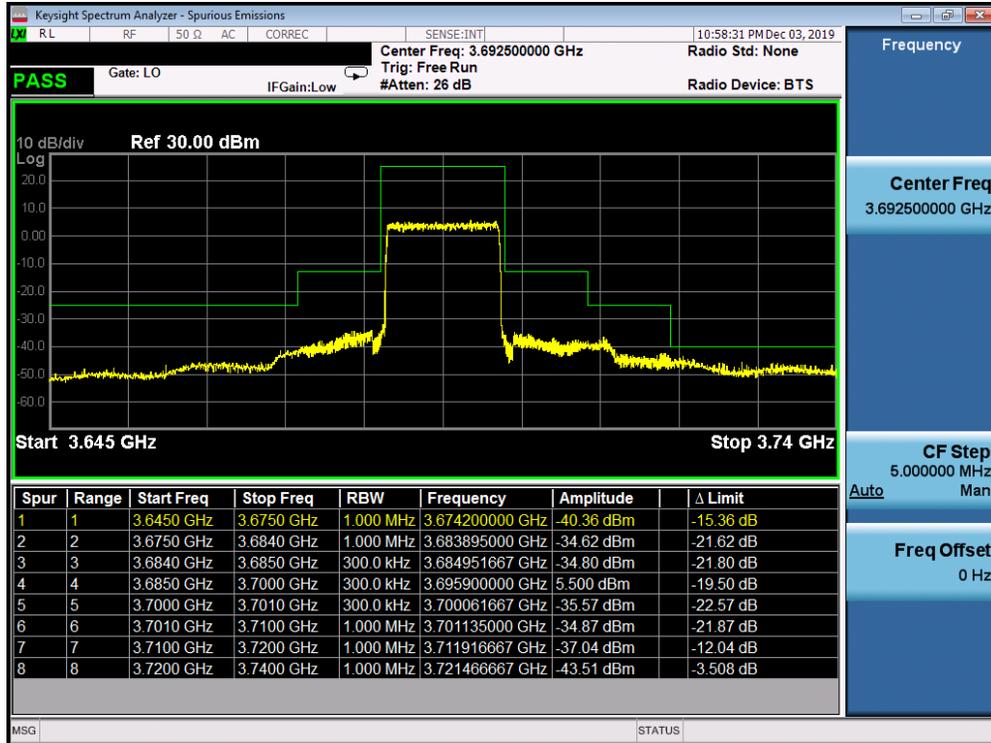


Plot 7-59. Upper ACP Plot (LTE Band 48 - 15.0MHz QPSK - Full RB Configuration)

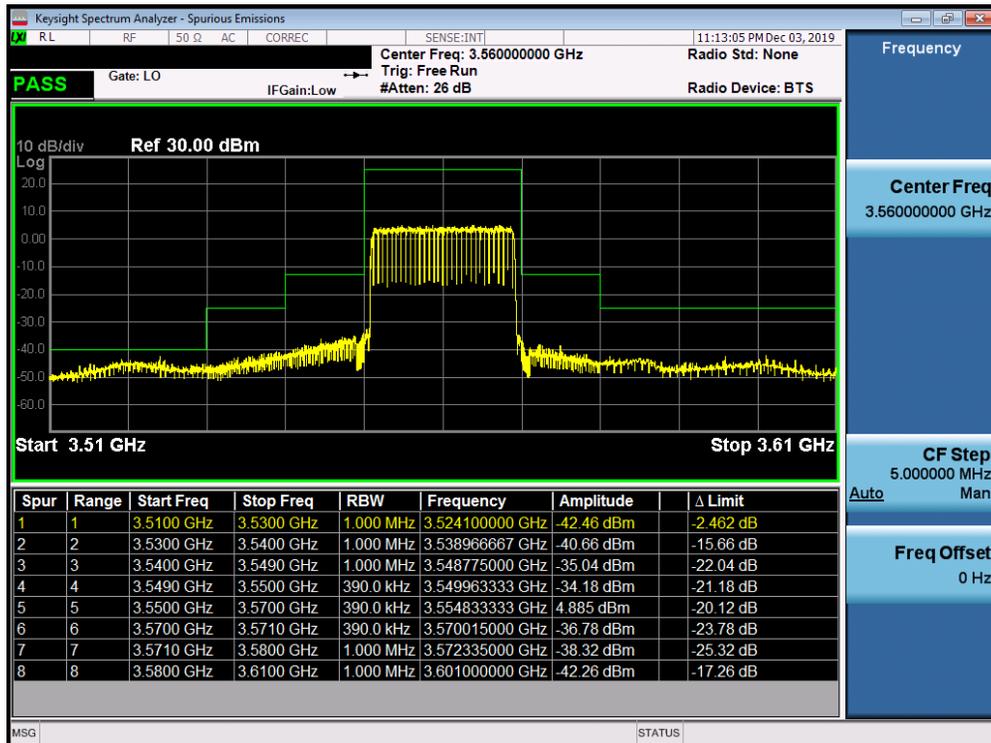


Plot 7-60. Lower ACP Plot (LTE Band 48 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 44 of 85

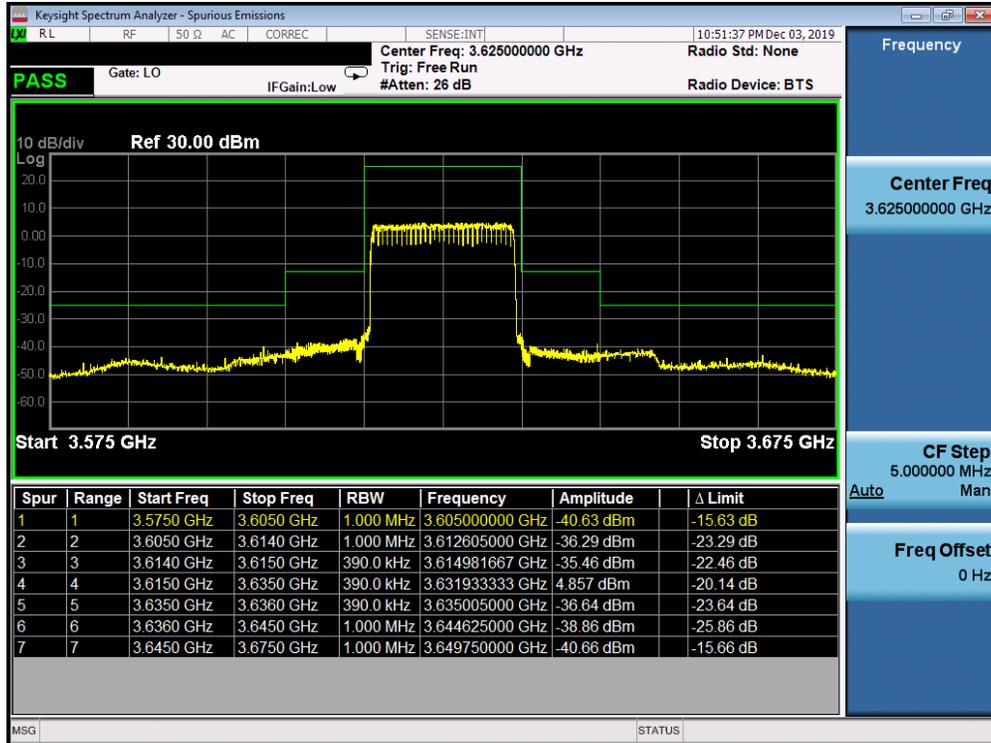

Plot 7-61. Mid ACP Plot (LTE Band 48 - 20.0MHz QPSK - Full RB Configuration)

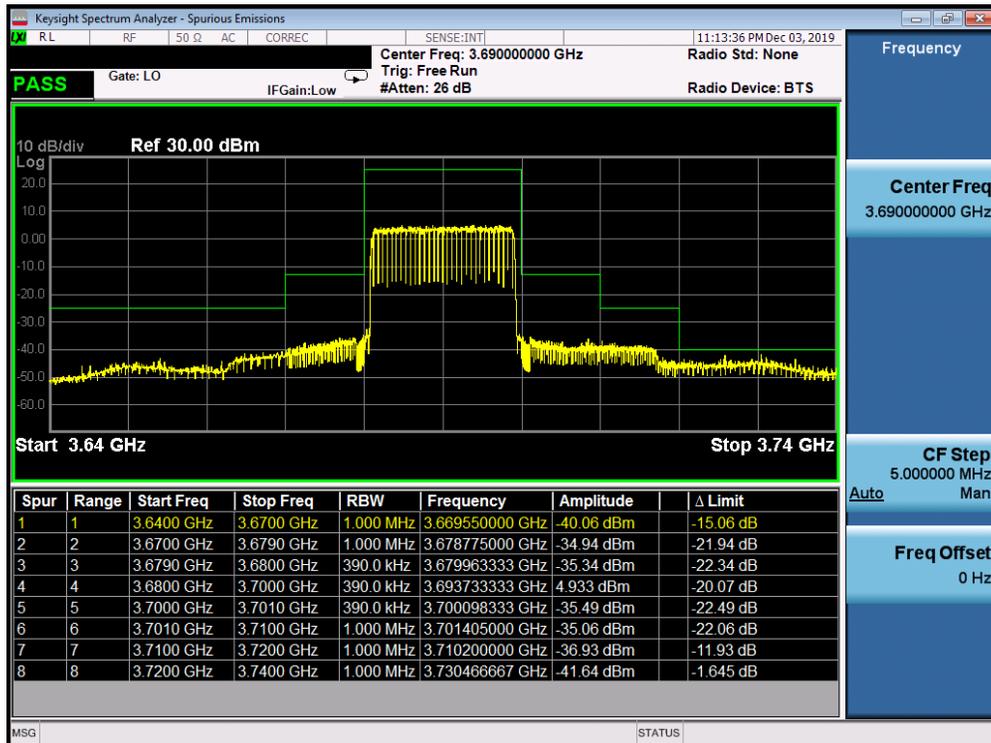

Plot 7-62. Upper ACP Plot (LTE Band 48 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 45 of 85

7.5 Additional Maximum Power Reduction (A-MPR) §2.1046

Test Overview

A-MPR is implemented in this device per the A-MPR specification in 3GPP TS 36.101. The conducted powers are shown herein to cover the different A-MPR levels specified in the standard. Measurement equipment was set up with triggering/gating on the spectrum analyzer such that powers were measured only during the on-time of the signal.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.2.2

Test Settings

1. Span = 2 x OBW to 3 x OBW
2. RBW = 1% to 5% of the OBW
3. Number of measurement points in sweep $\geq 2 \times \text{span} / \text{RBW}$
4. Sweep = auto-couple (less than transmission burst duration)
5. Detector = RMS (power)
6. Trigger was set to enable power measurements only on full power bursts
7. Trace was allowed to stabilize
8. Spectrum analyzer's "Channel Power" function was used to compute the power by integrating the spectrum across the OBW of the signal

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

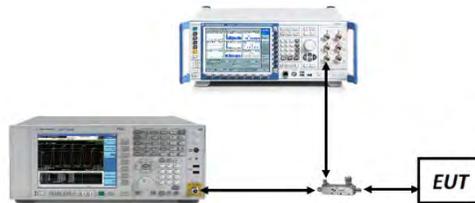


Figure 7-4. Test Instrument & Measurement Setup

Test Notes

1. A-MPR was only applied for test purposes to the 2CC case since the 1CC case was compliant for all testing at max power.
2. A-MPR was verified to comply with the "CA_NS_10" specification in the 3GPP TS 36.101 standard by setting the MCC to a U.S. code and the MNC to a U.S. carrier supporting LTE B48 operation.
3. 256-QAM modulation is not supported when operating in A-MPR mode.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 46 of 85

Test Case	NS	MCC	MNC	Channel BW [MHz]	PCC Channel Frequency [MHz]	SCC Channel Frequency [MHz]	Modulation	PCC RB Size	PCC RB Offset	SCC RB Size	SCC RB Offset	MPR [dB]	Maximum Target Output Power (dBm)	A-MPR [dB]	A-MPR Measured Power [dBm]	
1	NS_01	310	910	20 + 20	3560	3579.8	QPSK	100	0	100	0	0	22.50	≤ 11	13.17	
							16-QAM	100	0	100	0	≤ 1	21.50		13.05	
							64-QAM	100	0	100	0	≤ 2	20.50		13.14	
2				20 + 20	3560	3579.8	QPSK	1	99	1	0	0	0	22.50	≤ 11	19.65
							16-QAM	1	99	1	0	≤ 1	21.50	20.69		
							64-QAM	1	99	1	0	≤ 2	20.50	18.65		
4				20 + 20	3605.1	3624.9	QPSK	100	0	100	0	0	0	22.50	≤ 4.5	18.73
							16-QAM	100	0	100	0	≤ 1	21.50	18.84		
							64-QAM	100	0	100	0	≤ 2	20.50	18.72		
5				20 + 20	3605.1	3624.9	QPSK	1	99	1	0	0	0	22.50	≤ 4.5	22.52
							16-QAM	1	99	1	0	≤ 1	21.50	22.90		
							64-QAM	1	99	1	0	≤ 2	20.50	21.63		
7	20 + 20	3667.1	3689.9	QPSK	100	0	100	0	0	0	22.50	≤ 11	11.60			
				16-QAM	100	0	100	0	≤ 1	21.50	11.61					
				64-QAM	100	0	100	0	≤ 2	20.50	11.23					
8	20 + 20	3667.1	3689.9	QPSK	1	0	1	99	0	0	22.50	≤ 11	11.63			
				16-QAM	1	0	1	99	≤ 1	21.50	13.38					
				64-QAM	1	0	1	99	≤ 2	20.50	12.61					

Table 7-3. A-MPR Conducted Power Measurements

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 47 of 85	

7.6 Uplink Carrier Aggregation

§96.41(e)

Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0-B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B MHz below the lower CBSD assigned channel edge, the conducted power of any emission shall not exceed -25 dBm/MHz.

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-5. Test Instrument & Measurement Setup

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 48 of 85

Test Notes

1. Conducted power and spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device. The worst case (highest) powers were found while operating with QPSK modulation, as shown in Table 7-4 and 7-5 below, with both carriers set to transmit using 1RB.

2. Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's authorized frequency channel, a resolution bandwidth of no less than one percent of the fundamental emission bandwidth may be employed.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 49 of 85


Uplink CA Configuration 48C

PCC						SCC						ULCA Tx.Power (dBm)
Channel	Frequency [MHz]	BW [MHz]	Mod.	RB Size	RB Offset	Channel	Frequency [MHz]	BW [MHz]	Mod.	RB Size	RB Offset	
55340	3560.0	20	QPSK	100	0	55538	3579.8	20	QPSK	100	0	20.37
55340	3560.0	20	16-QAM	100	0	55538	3579.8	20	16-QAM	100	0	19.86
55340	3560.0	20	64-QAM	100	0	55538	3579.8	20	64-QAM	100	0	19.72
55340	3560.0	20	256-QAM	100	0	55538	3579.8	20	256-QAM	100	0	17.26

Table 7-4. Conducted Powers (B48 with 20MHz BW for all modulations)


PCC						SCC						ULCA Tx.Power (dBm)
Channel	Frequency [MHz]	BW [MHz]	Mod.	RB Size	RB Offset	Channel	Frequency [MHz]	BW [MHz]	Mod.	RB Size	RB Offset	
55340	3560.0	20	QPSK	1	99	55538	3579.8	20	QPSK	1	0	23.32
55990	3625.0	20	QPSK	1	99	56188	3644.8	20	QPSK	1	0	22.49
56640	3690.0	20	QPSK	1	0	56442	3670.2	20	QPSK	1	99	22.78

Table 7-5. Conducted Powers (B48 – PCC/SCC: RB Size 1)

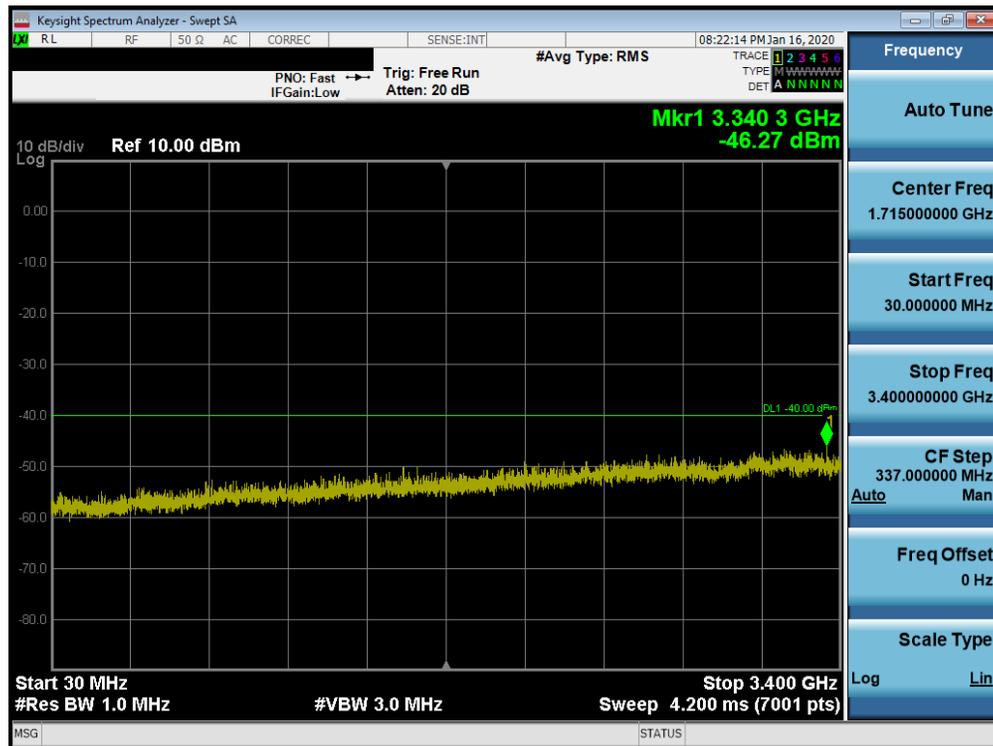

Plot 7-63. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Low Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 50 of 85

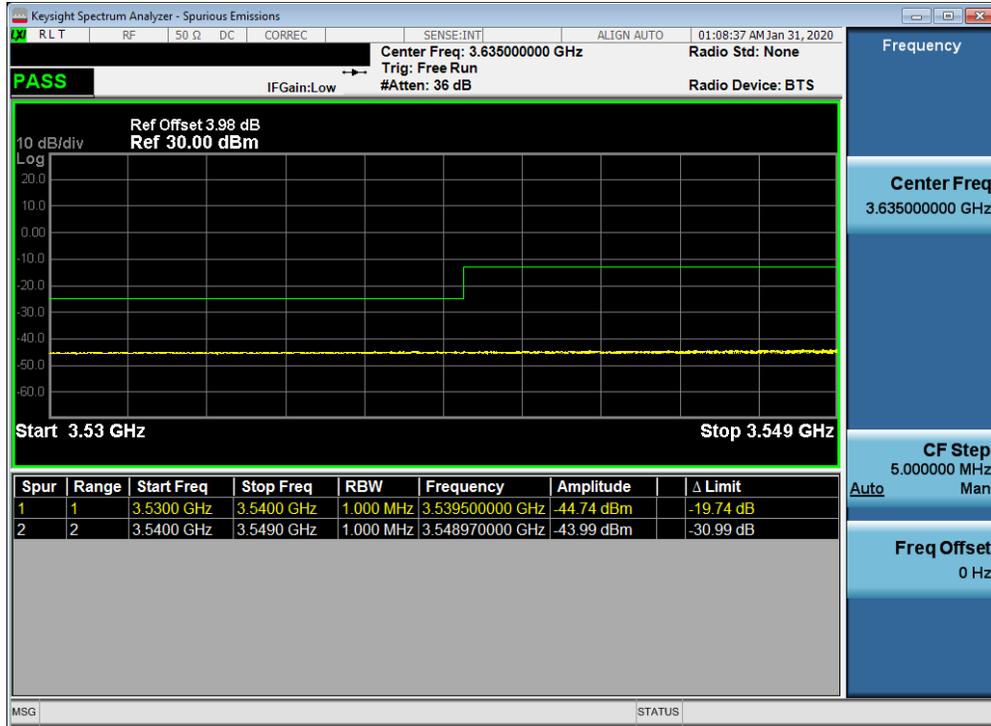


Plot 7-64. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Low Channel)




Plot 7-65. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Low Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 51 of 85

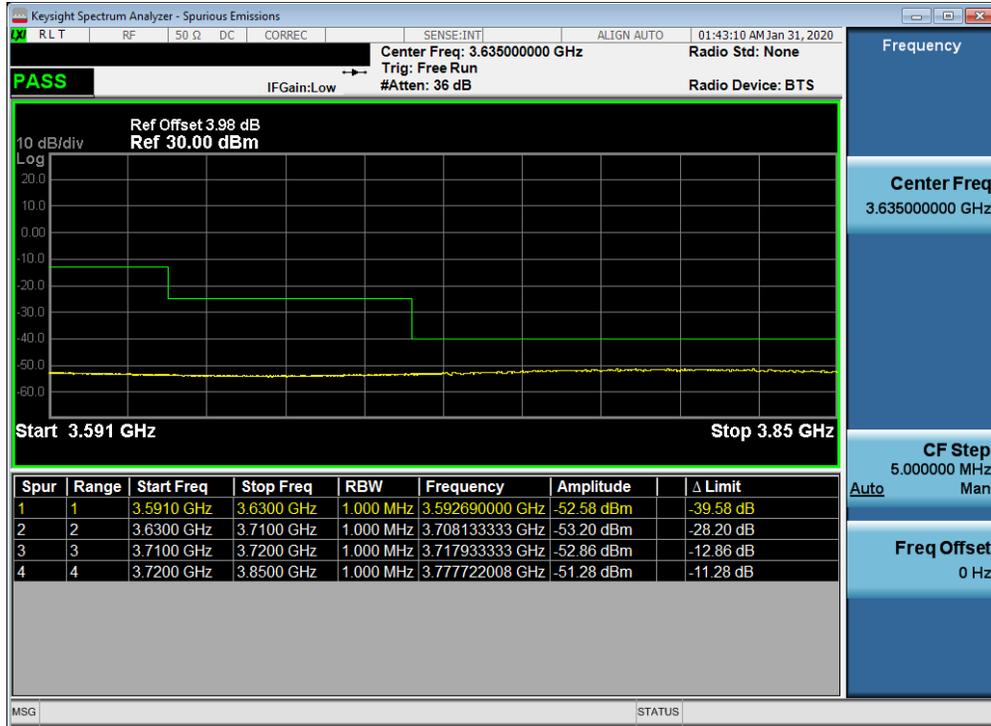


Plot 7-66. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Low Channel)

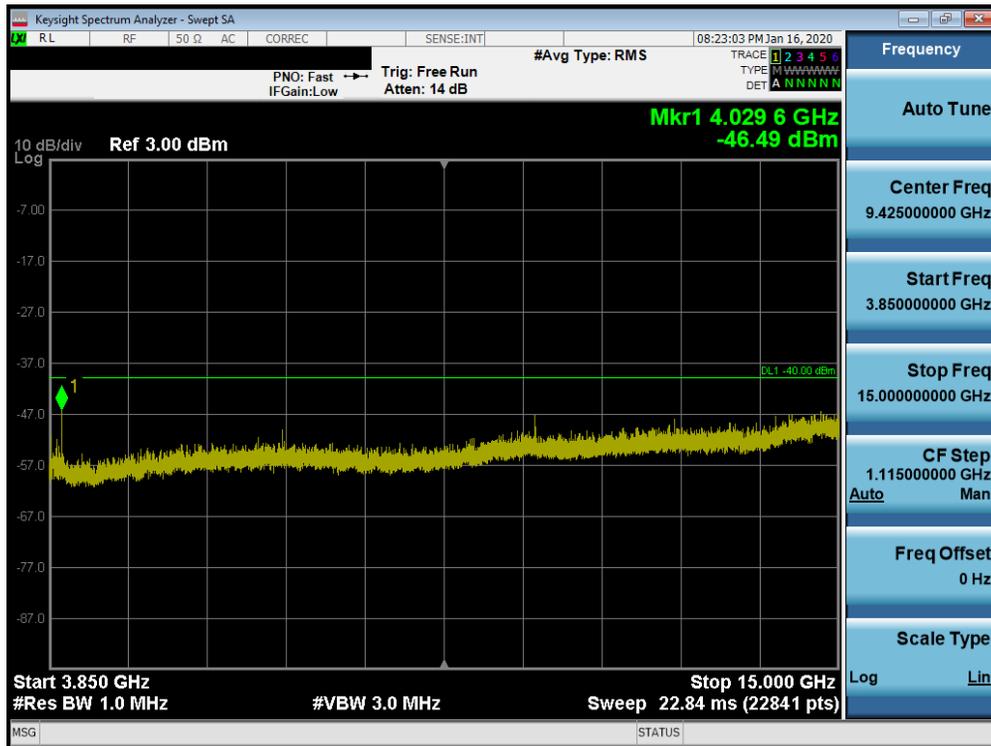


Plot 7-67. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Low Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 52 of 85

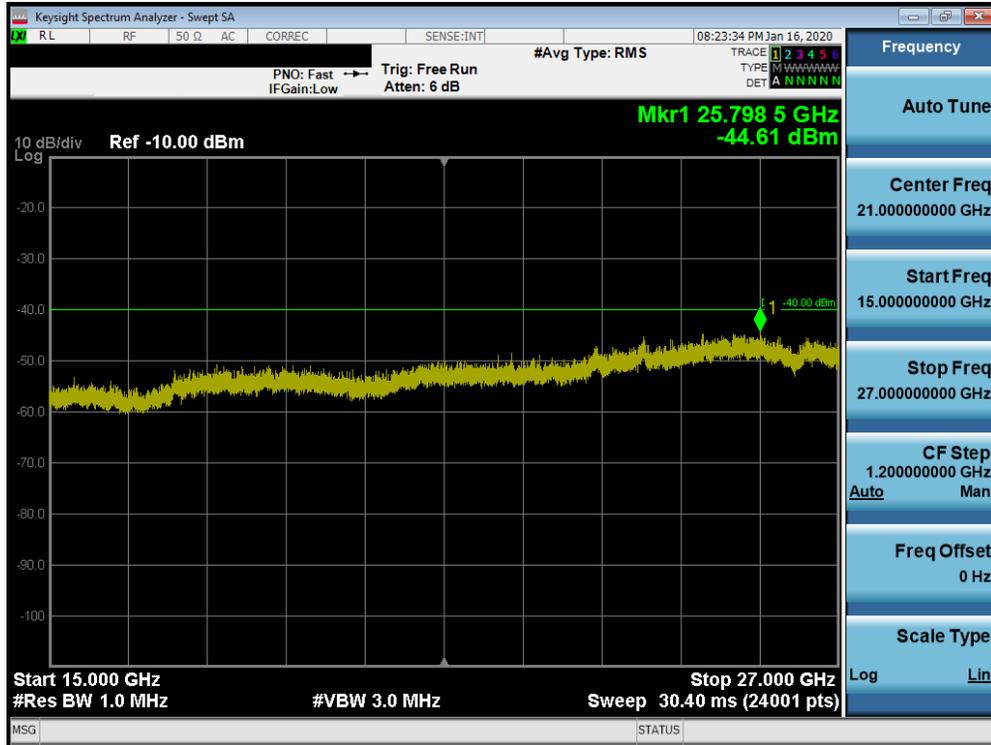


Plot 7-68. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Low Channel)

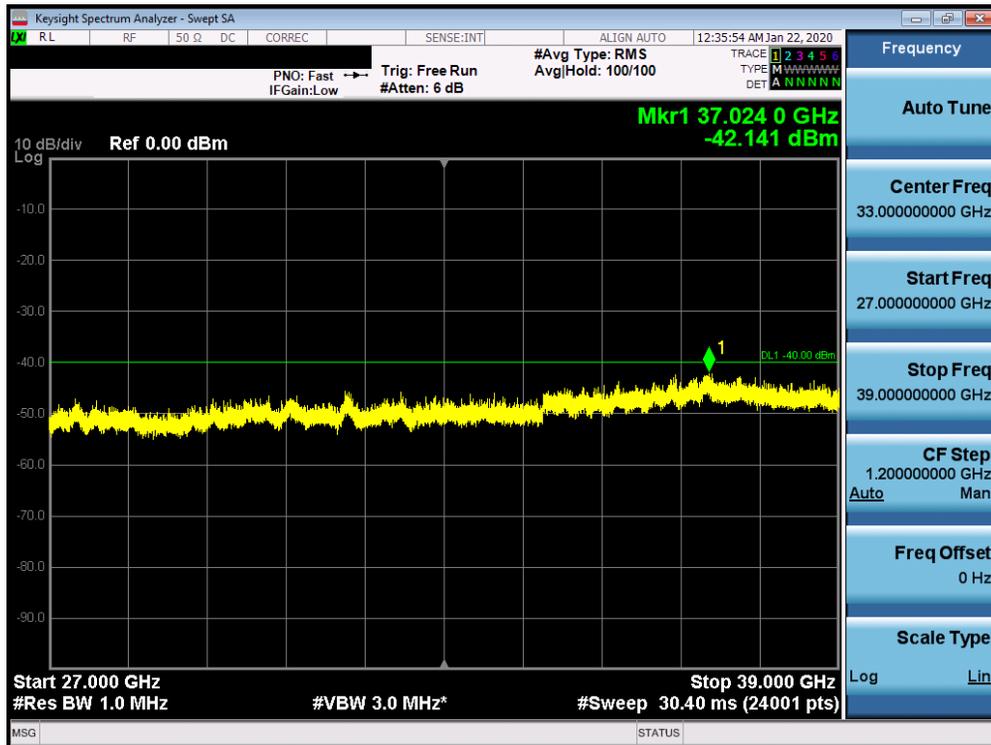


Plot 7-69. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Low Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 53 of 85

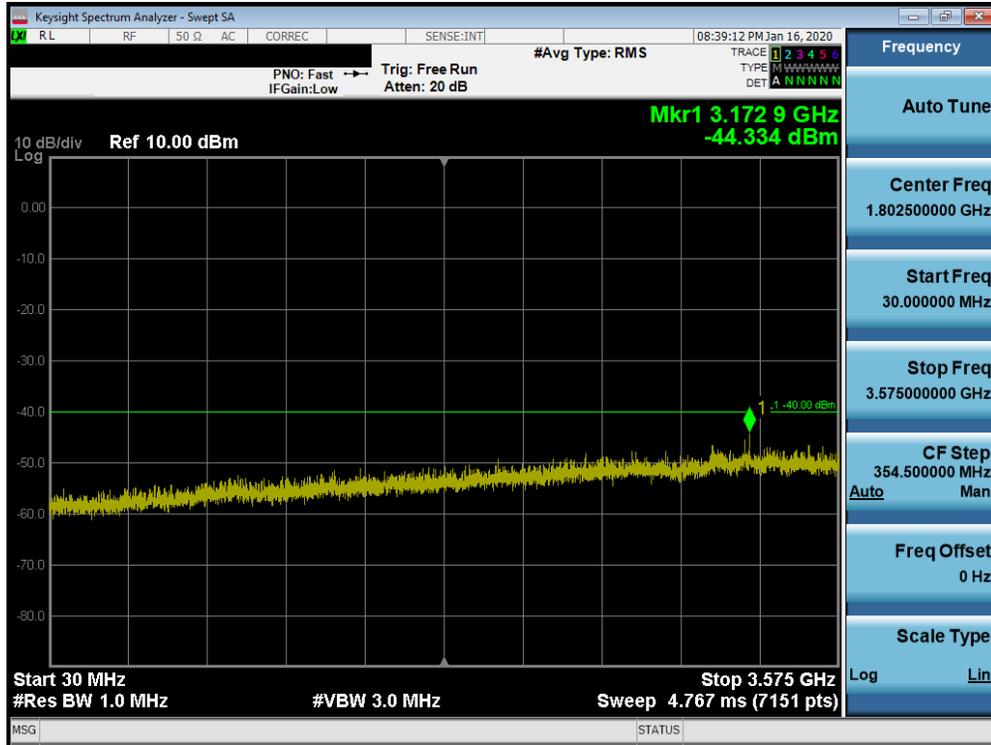

Plot 7-70. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Mid Channel)

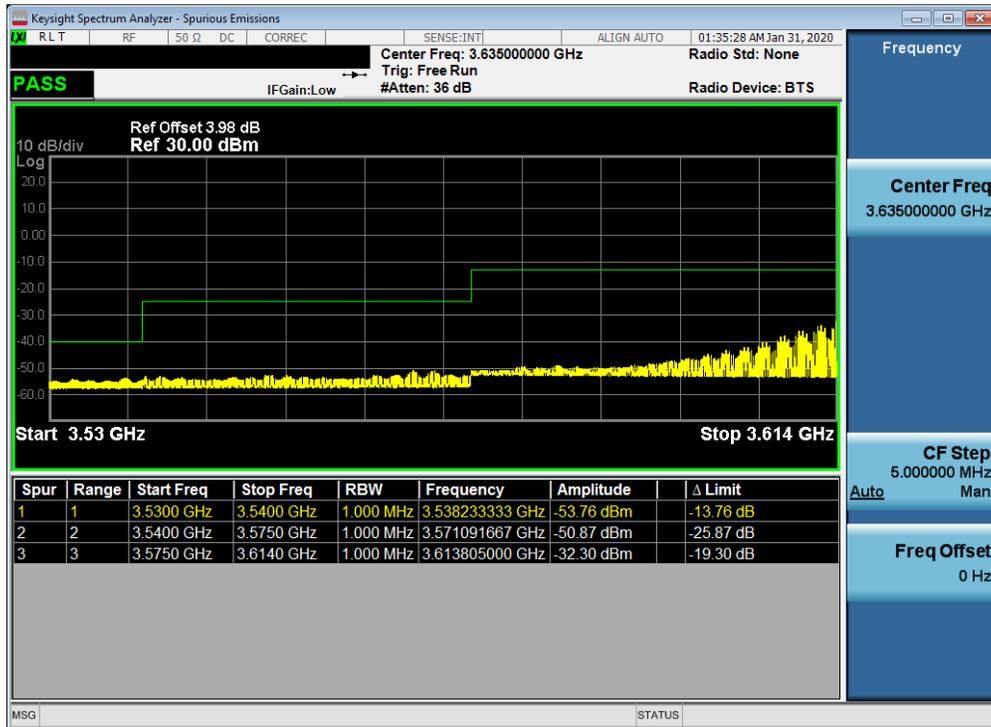


Plot 7-71. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Mid Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 54 of 85




Plot 7-72. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Mid Channel)

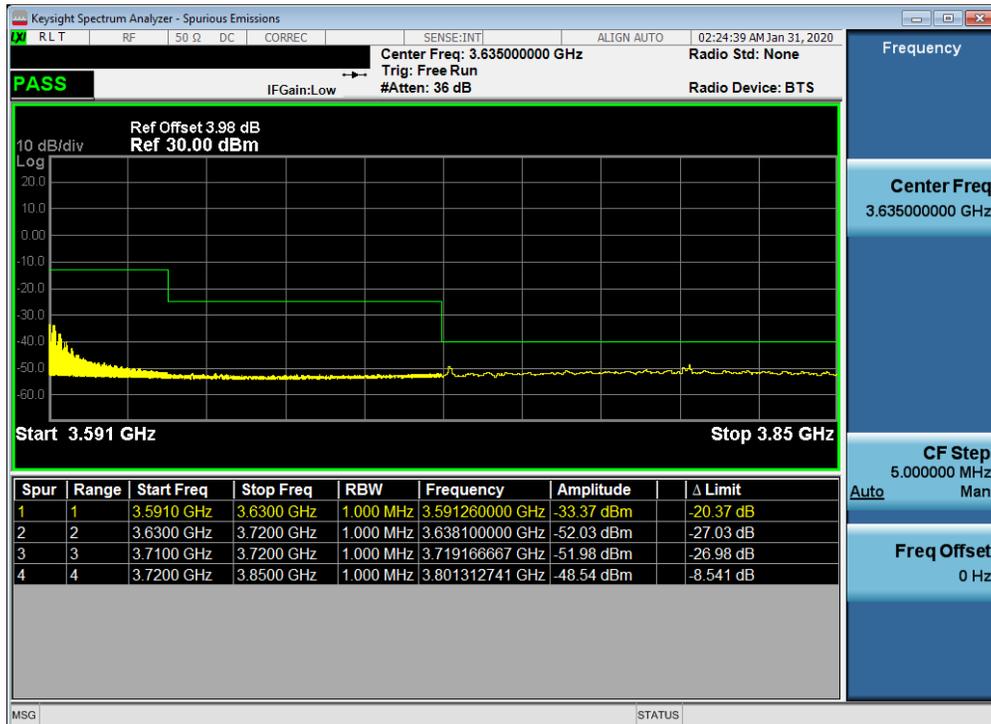


Plot 7-73. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Mid Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 55 of 85

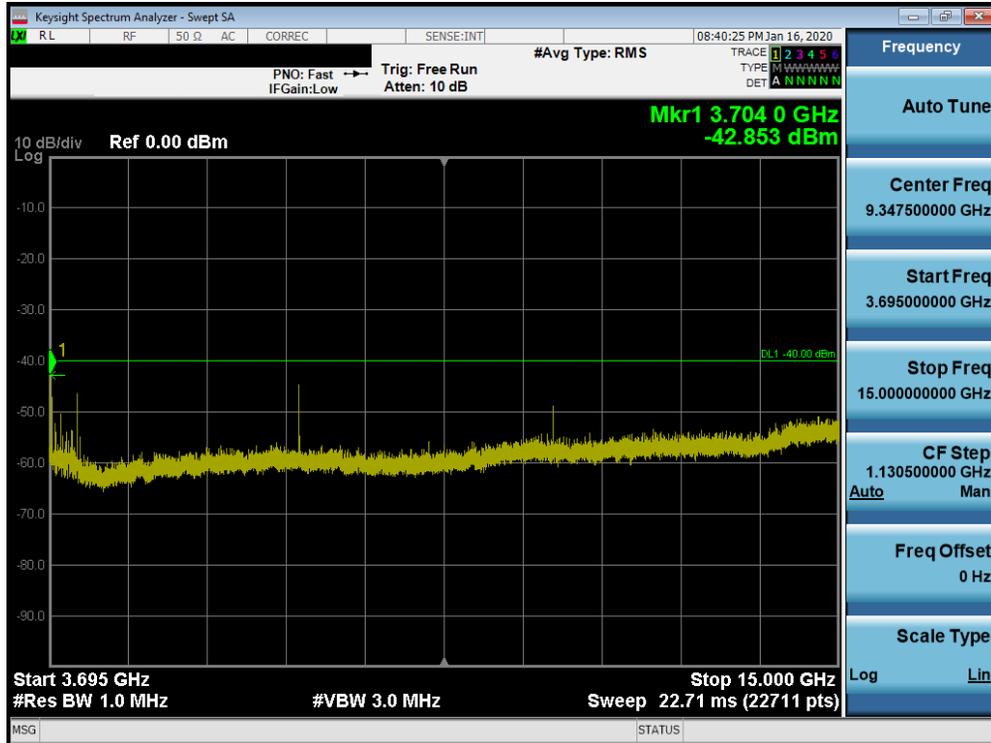


Plot 7-74. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Mid Channel)

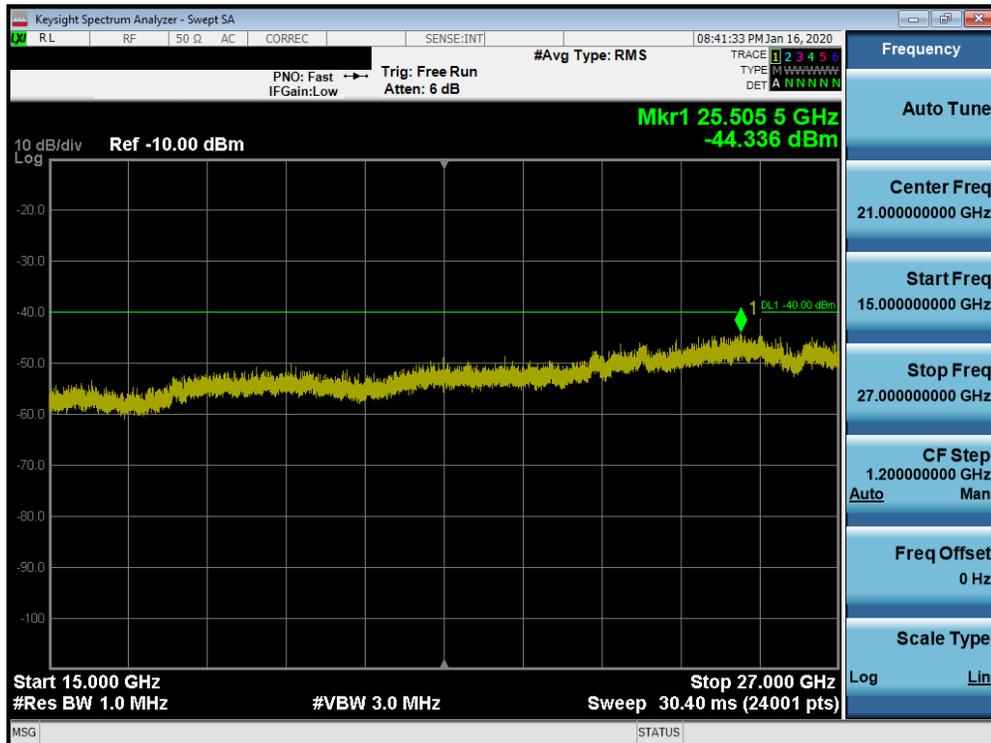


Plot 7-75. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Mid Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 56 of 85

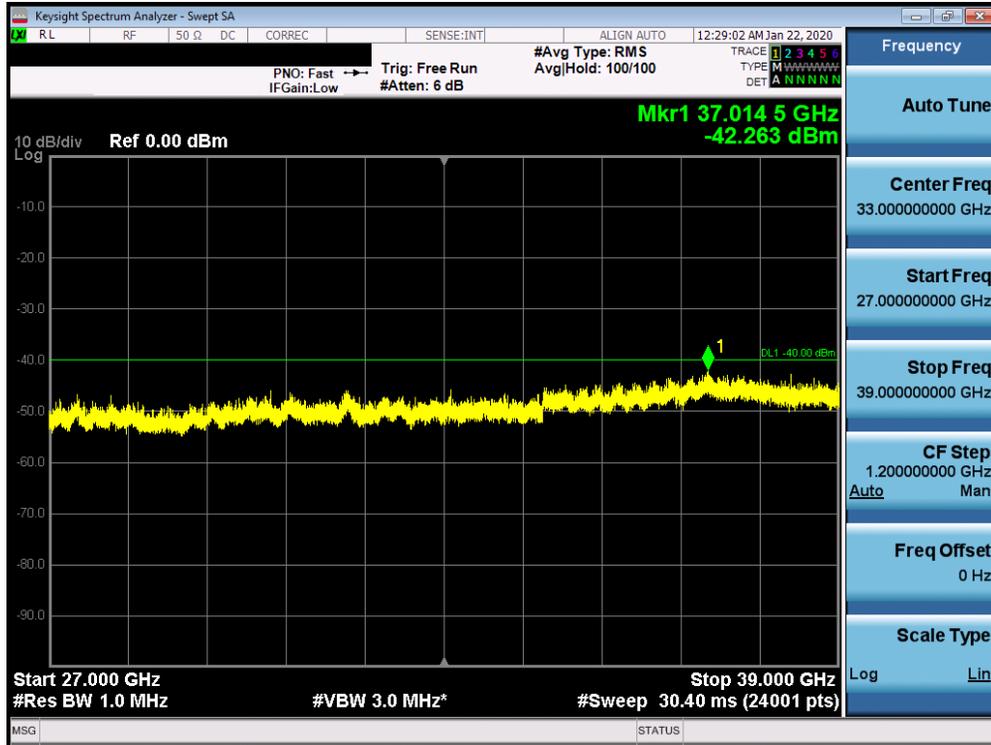


Plot 7-76. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/99 SCC 1/0 - Mid Channel)

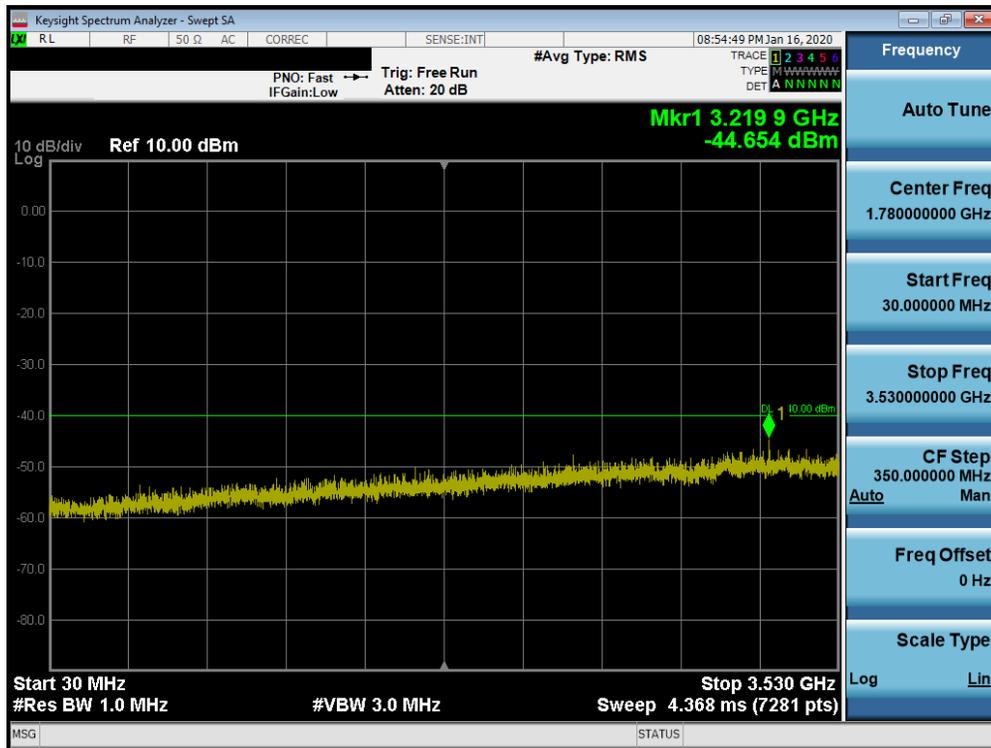

Plot 7-77. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/0 SCC 1/99 - High Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 57 of 85

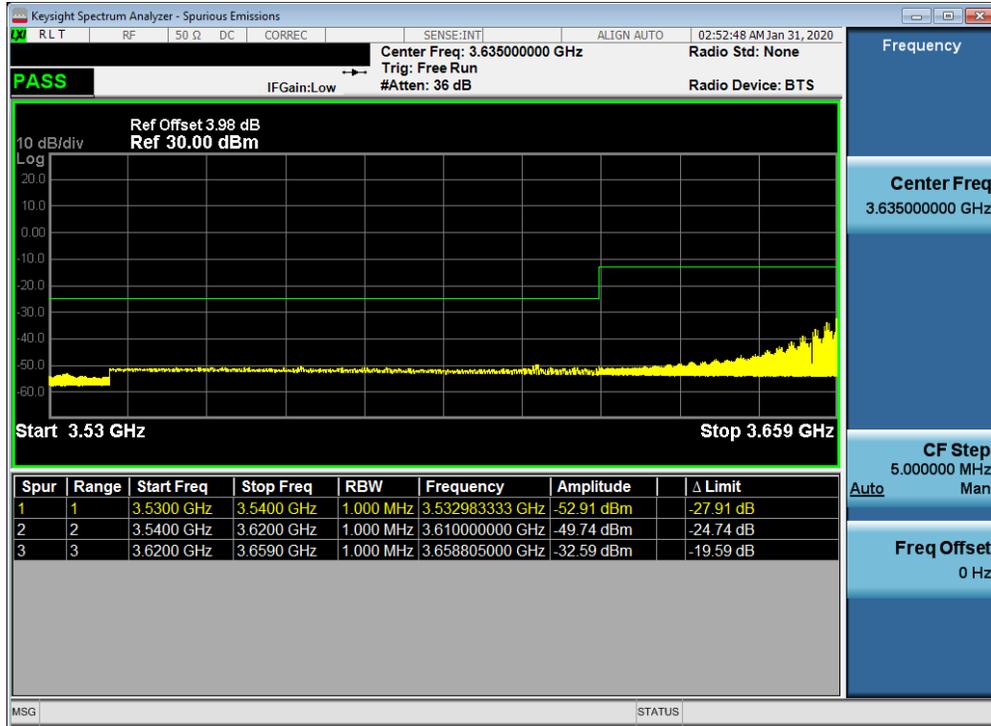


Plot 7-78. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/0 SCC 1/99 - High Channel)




Plot 7-79. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/0 SCC 1/99 - High Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 58 of 85

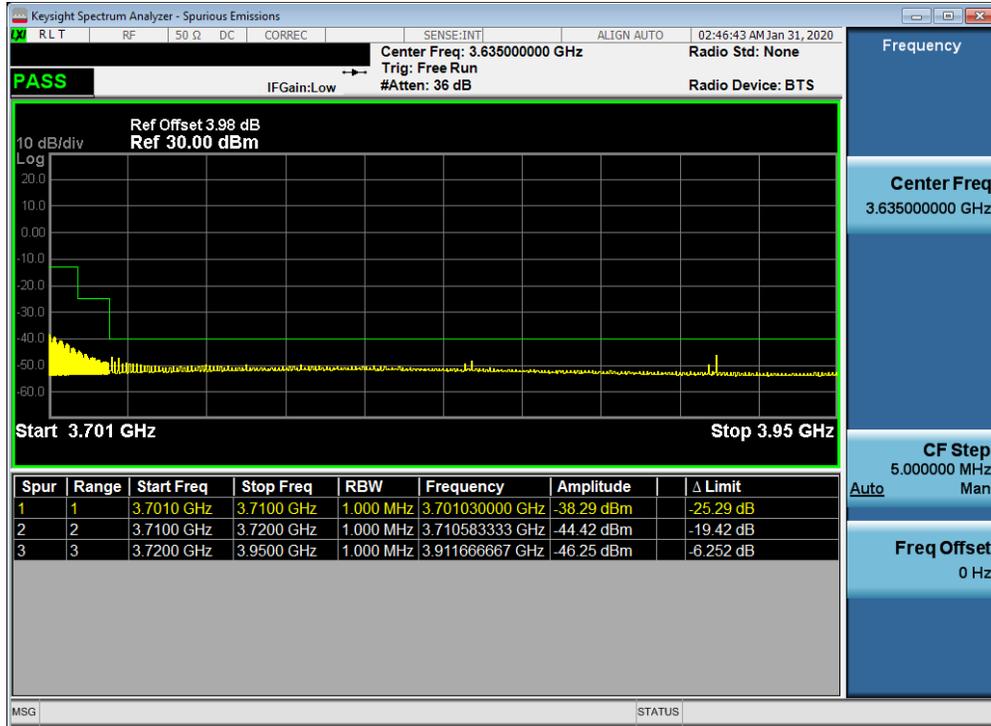

Plot 7-80. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/0 SCC 1/99 - High Channel)

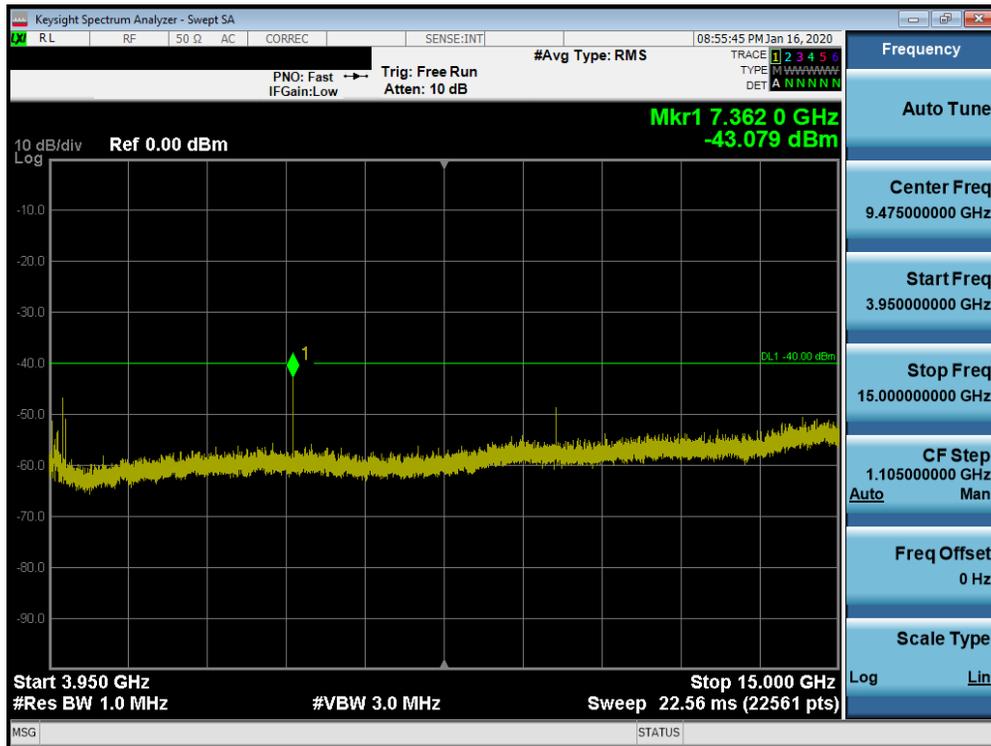


Plot 7-81. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK - PCC 1/0 SCC 1/99 - High Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 59 of 85




Plot 7-82. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK – PCC 1/0 SCC 1/99 - High Channel)

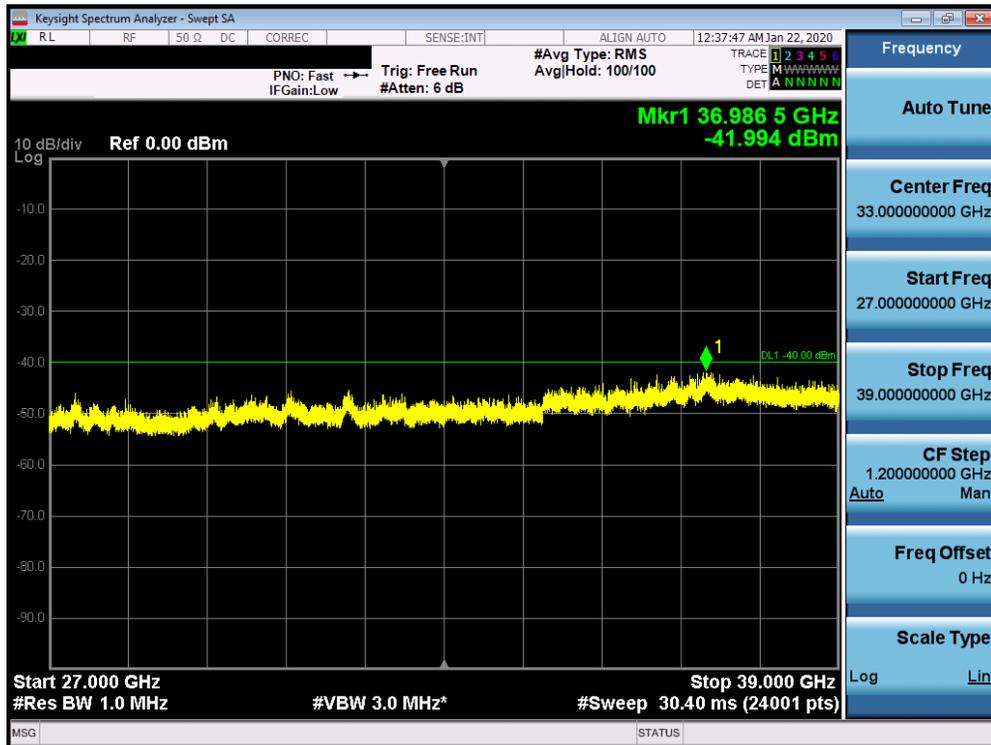


Plot 7-83. Conducted Spurious Plot (LTE Band 48 - 20.0MHz QPSK – PCC 1/0 SCC 1/99 - High Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 60 of 85

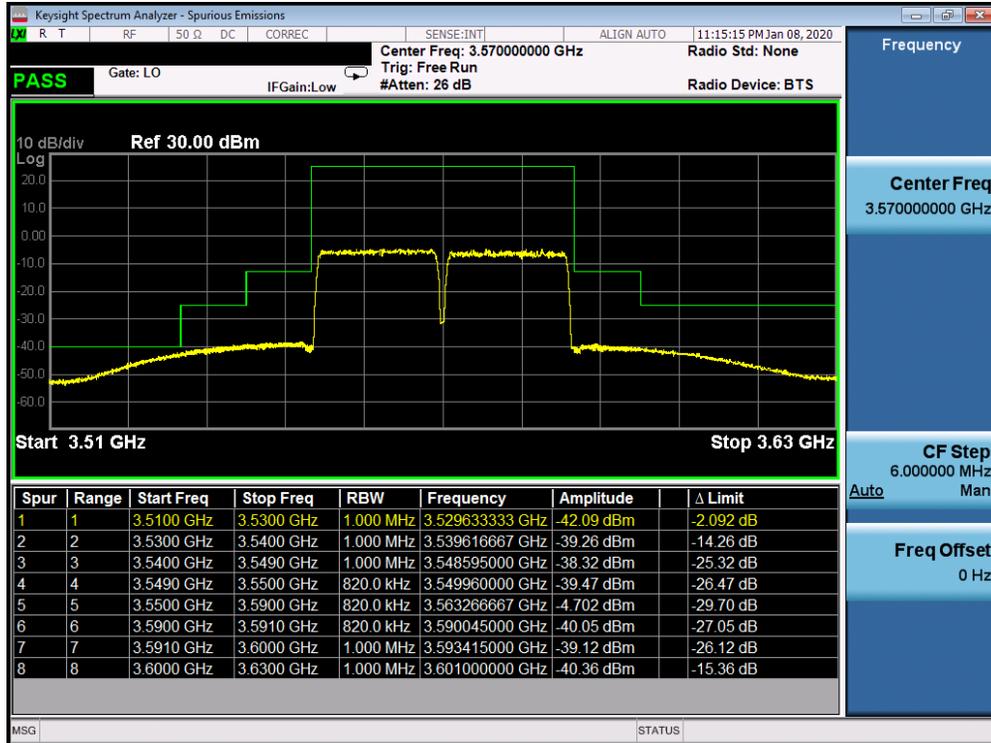


Plot 7-84. Lower Band Edge Plot (Band 48 QPSK – PCC:20 MHz SCC:20 MHz – Full RB)

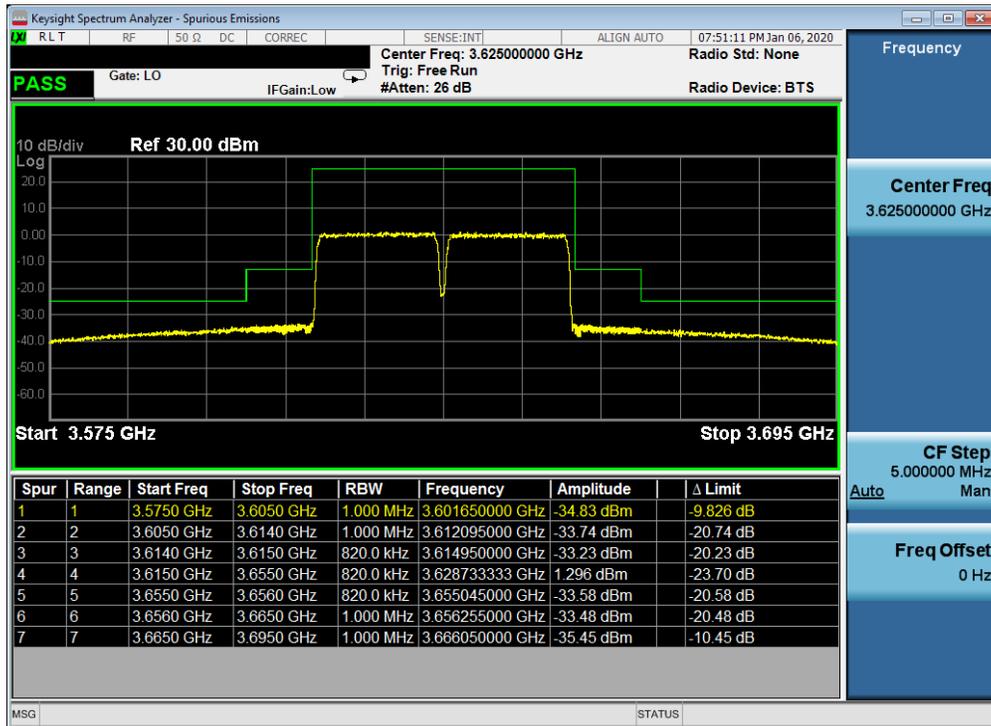

Plot 7-85. Mid Band Edge Plot (Band 48 QPSK – PCC:20 MHz SCC:20 MHz – Full RB)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 61 of 85

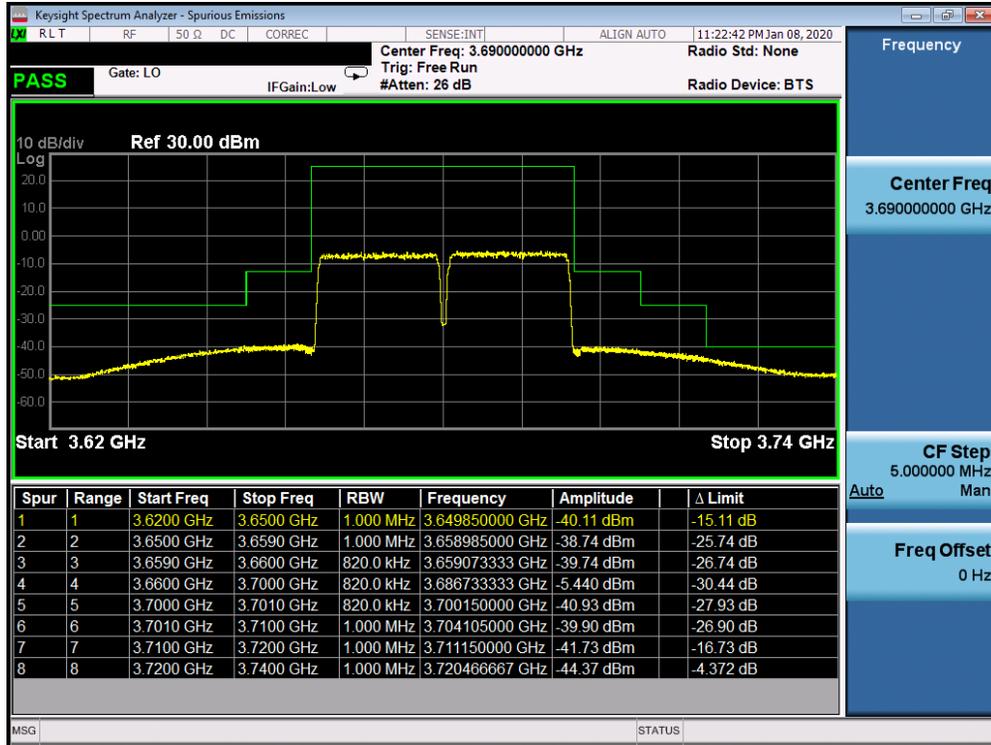

Plot 7-86. Upper Band Edge Plot (Band 48 QPSK – PCC:20 MHz SCC:20 MHz – Full RB)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 62 of 85

7.7 Radiated Power (EIRP)
§96.41(b)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points ≥ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”.
8. The integration bandwidth was set equal to 10MHz.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 63 of 85

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

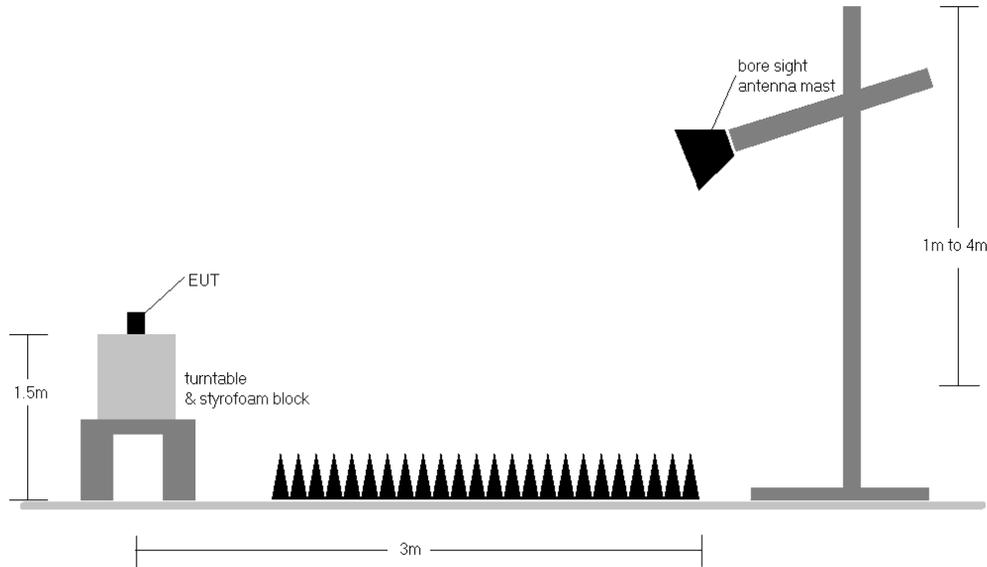


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 64 of 85	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
3552.50	5	QPSK	H	100	265	1 / 0	13.00	7.13	20.13	0.103	23.00	-2.87
3625.00	5	QPSK	H	105	277	1 / 0	12.05	6.85	18.90	0.078	23.00	-4.10
3697.50	5	QPSK	H	100	265	1 / 0	11.48	6.26	17.74	0.059	23.00	-5.26
3552.50	5	16-QAM	H	100	265	1 / 0	12.72	7.13	19.85	0.097	23.00	-3.15
3552.50	5	64-QAM	H	100	265	1 / 24	11.85	7.13	18.98	0.079	23.00	-4.02
3552.50	5	256-QAM	H	100	265	1 / 0	9.60	7.13	16.73	0.047	23.00	-6.27
3555.00	10	QPSK	H	108	269	1 / 0	13.07	7.13	20.20	0.105	23.00	-2.80
3625.00	10	QPSK	H	107	280	1 / 0	11.82	6.85	18.67	0.074	23.00	-4.33
3695.00	10	QPSK	H	100	266	1 / 0	11.38	6.26	17.64	0.058	23.00	-5.36
3555.00	10	16-QAM	H	108	269	1 / 0	12.60	7.13	19.73	0.094	23.00	-3.27
3555.00	10	64-QAM	H	108	269	1 / 49	11.01	7.13	18.14	0.065	23.00	-4.86
3555.00	10	256-QAM	H	108	269	1 / 0	8.50	7.13	15.63	0.037	23.00	-7.37
3557.50	15	QPSK	H	111	268	1 / 0	12.88	7.13	20.01	0.100	23.00	-2.99
3625.00	15	QPSK	H	101	273	1 / 0	11.69	6.85	18.54	0.071	23.00	-4.46
3692.50	15	QPSK	H	100	268	1 / 0	11.30	6.26	17.56	0.057	23.00	-5.44
3557.50	15	16-QAM	H	111	268	1 / 0	12.27	7.13	19.40	0.087	23.00	-3.60
3557.50	15	64-QAM	H	111	268	1 / 74	11.26	7.13	18.39	0.069	23.00	-4.61
3557.50	15	256-QAM	H	111	268	1 / 0	9.01	7.13	16.14	0.041	23.00	-6.86
3560.00	20	QPSK	H	104	269	1 / 0	13.68	7.13	20.81	0.121	23.00	-2.19
3625.00	20	QPSK	H	100	276	1 / 0	12.29	6.85	19.14	0.082	23.00	-3.86
3690.00	20	QPSK	H	100	271	1 / 0	13.09	6.26	19.35	0.086	23.00	-3.65
3560.00	20	16-QAM	H	104	269	1 / 0	12.73	7.13	19.86	0.097	23.00	-3.14
3560.00	20	64-QAM	H	104	269	1 / 99	11.98	7.13	19.11	0.081	23.00	-3.89
3560.00	20	256-QAM	H	104	269	1 / 0	9.66	7.13	16.79	0.048	23.00	-6.21
3560.00	20	QPSK	V	109	262	1 / 0	12.75	7.21	19.96	0.099	23.00	-3.04
3560.00	20 (WCP)	QPSK	H	262	26	1 / 0	6.78	7.13	13.91	0.025	23.00	-9.09

Table 7-6. EIRP Data (Band 48)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M191140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 65 of 85	

PCC Frequency [MHz]	PCC Channel Bandwidth [MHz]	SCC Frequency [MHz]	SCC Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	PCC RB Size/Offset	SCC RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
3560.00	20	3571.70	5	QPSK	H	102	153	1 / 24	1 / 0	14.17	7.13	21.30	0.135	23.00	-1.70
3625.00	20	3636.70	5	QPSK	H	115	163	1 / 24	1 / 0	14.33	6.85	21.18	0.131	23.00	-1.82
3697.50	20	3678.30	5	QPSK	H	103	158	1 / 0	1 / 24	14.04	6.26	20.30	0.107	23.00	-2.70
3560.00	20	3571.70	5	16-QAM	H	102	153	1 / 24	1 / 0	14.15	7.13	21.28	0.134	23.00	-1.72
3560.00	20	3571.70	5	64-QAM	H	102	153	1 / 24	1 / 0	13.90	7.13	21.03	0.127	23.00	-1.97
3560.00	20	3571.70	5	256-QAM	H	102	153	1 / 24	1 / 0	13.02	7.13	20.15	0.104	23.00	-2.85
3560.00	20	3574.40	10	QPSK	H	148	157	1 / 49	1 / 0	14.36	7.13	21.49	0.141	23.00	-1.51
3625.00	20	3639.40	10	QPSK	H	146	164	1 / 49	1 / 0	12.99	6.85	19.84	0.096	23.00	-3.16
3695.00	20	3675.60	10	QPSK	H	139	162	1 / 0	1 / 49	12.21	6.26	18.47	0.070	23.00	-4.53
3560.00	20	3574.40	10	16-QAM	H	148	157	1 / 49	1 / 0	13.46	7.13	20.59	0.115	23.00	-2.41
3560.00	20	3574.40	10	64-QAM	H	148	157	1 / 49	1 / 0	11.84	7.13	18.97	0.079	23.00	-4.03
3560.00	20	3574.40	10	256-QAM	H	148	157	1 / 49	1 / 0	12.04	7.13	19.17	0.083	23.00	-3.83
3560.00	20	3577.10	15	QPSK	H	115	144	1 / 74	1 / 0	13.95	7.13	21.08	0.128	23.00	-1.92
3625.00	20	3642.10	15	QPSK	H	109	152	1 / 74	1 / 0	13.83	6.85	20.68	0.117	23.00	-2.32
3692.50	20	3672.90	15	QPSK	H	121	154	75 / 0	75 / 0	13.54	6.26	19.80	0.096	23.00	-3.20
3560.00	20	3577.10	15	16-QAM	H	115	144	1 / 74	1 / 0	13.23	7.13	20.36	0.109	23.00	-2.64
3560.00	20	3577.10	15	64-QAM	H	115	144	1 / 74	1 / 0	12.96	7.13	20.09	0.102	23.00	-2.91
3560.00	20	3577.10	15	256-QAM	H	115	144	1 / 74	1 / 0	12.76	7.13	19.89	0.098	23.00	-3.11
3560.00	20	3579.80	20	QPSK	H	104	147	1 / 99	1 / 0	14.48	7.13	21.61	0.145	23.00	-1.39
3560.00	20	3579.80	20	16-QAM	H	104	147	1 / 99	1 / 0	14.44	7.13	21.57	0.144	23.00	-1.43
3560.00	20	3579.80	20	64-QAM	H	104	147	1 / 99	1 / 0	12.41	7.13	19.54	0.090	23.00	-3.46
3560.00	20	3579.80	20	256-QAM	H	104	147	1 / 99	1 / 0	11.33	7.13	18.46	0.070	23.00	-4.54
3560.00	20	3579.80	20	3579.80	V	101	266	1 / 99	1 / 0	12.88	7.21	20.09	0.102	23.00	-2.91
3560.00	20 (WCP)	3579.80	20 (WCP)	3579.80	H	161	346	1 / 99	1 / 0	9.69	7.13	16.82	0.048	23.00	-6.18

Table 7-7. EIRP Data (Band 48 ULCA)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 66 of 85	

7.8 Radiated Spurious Emissions Measurements

§2.1053 §96.41(e)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Max Hold (In cases where the level is within 2dB of the limit, the final measurement is taken using triggering/gating and trace averaging.)
7. The trace was allowed to stabilize

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 67 of 85

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

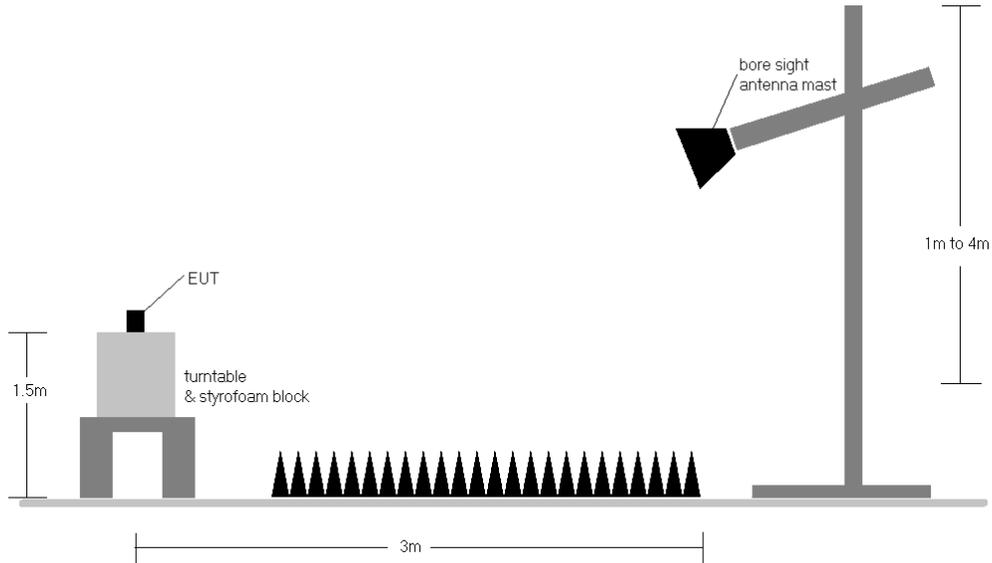



Figure 7-7. Test Instrument & Measurement Setup

Test Notes


- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 68 of 85	

LTE Band 48

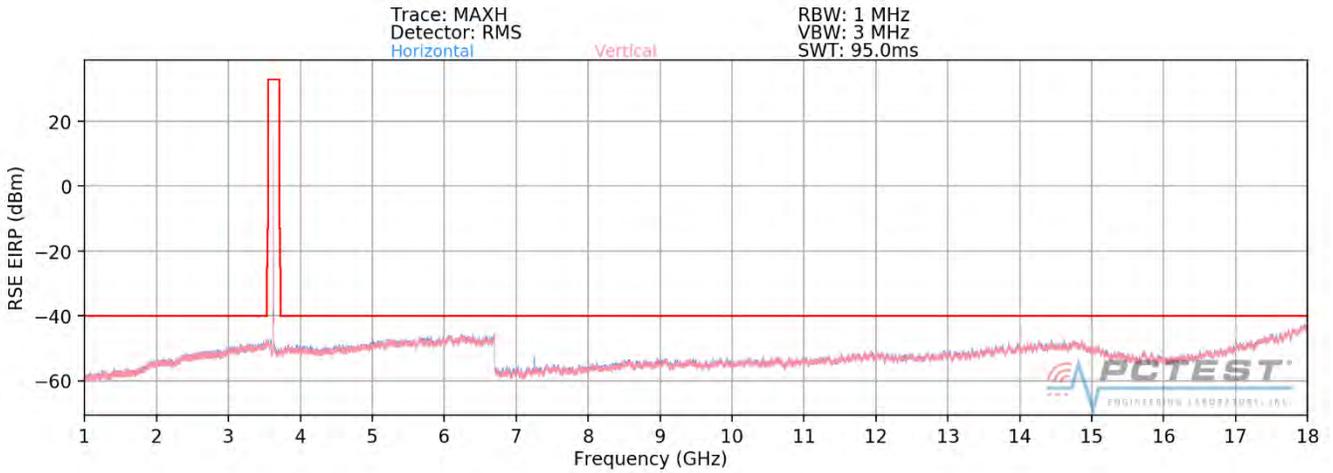

Plot 7-87. Radiated Spurious Plot 1 - 18GHz (Band 48)

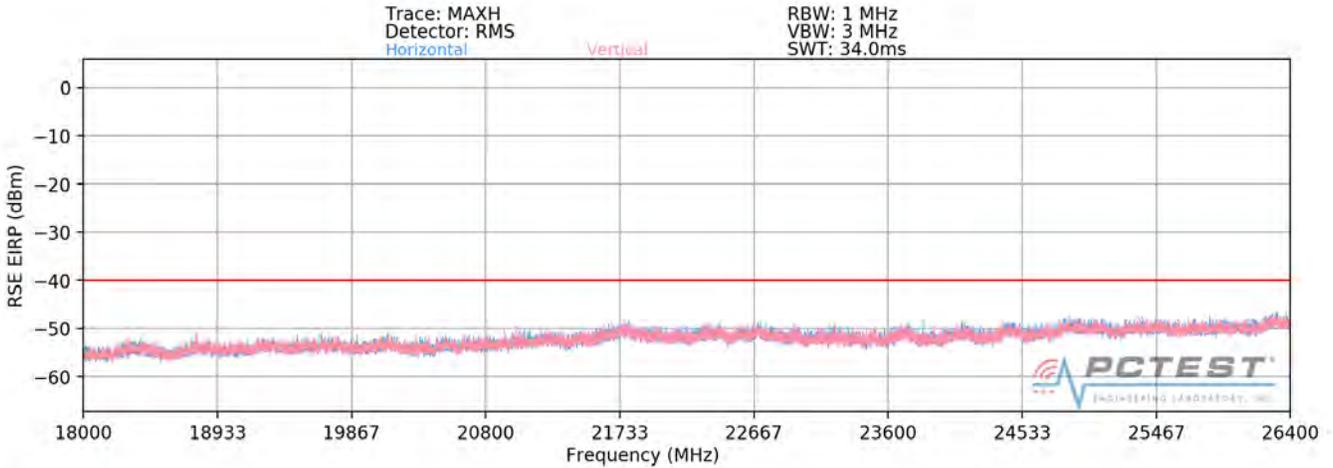

Plot 7-88. Radiated Spurious Plot 18 - 26.5GHz (Band 48)

FCC ID: A3LSMG988U	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 69 of 85

OPERATING FREQUENCY: 3560.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -40 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
7120.00	V	133	25	-63.64	9.18	-54.46	-14.5
10680.00	V	114	280	-64.24	9.48	-54.76	-14.8
14240.00	V	-	-	-61.13	8.58	-52.55	-12.5
17800.00	V	-	-	-53.87	7.74	-46.13	-6.1

Table 7-8. Radiated Spurious Data (Band 48 – Low Channel)

OPERATING FREQUENCY: 3625.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -40 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
7250.00	V	315	18	-53.94	9.14	-44.80	-4.8
10875.00	V	122	75	-64.41	9.31	-55.10	-15.1
14500.00	V	291	60	-58.92	8.46	-50.46	-10.5

Table 7-9. Radiated Spurious Data (Band 48 – Mid Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 70 of 85	

OPERATING FREQUENCY: 3690.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -40 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
7380.00	V	230	348	-63.32	9.27	-54.05	-14.0
11070.00	V	259	15	-61.63	9.41	-52.22	-12.2
14760.00	V	-	-	-59.68	8.61	-51.07	-11.1

Table 7-10. Radiated Spurious Data (Band 48 – High Channel)

OPERATING FREQUENCY: 3625.00 MHz
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -40 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
7250.00	V	168	321	-57.74	9.14	-48.60	-8.6
10875.00	V	191	300	-60.59	9.31	-51.28	-11.3
14500.00	V	-	-	-54.98	8.46	-46.52	-6.5

Table 7-11. Radiated Spurious Data with WCP (Band 48 – Mid Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 71 of 85	

7.9 Uplink Carrier Aggregation Radiated Measurements

§2.1053, §96.41(e)

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v02r02 – Section 5.8

ANSI/TIA- 603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. No. of sweep points \geq 2 x span / RBW
4. Detector = RMS
5. Trace mode = trace average for continuous emissions, max hold for pulse emissions
6. The trace was allowed to stabilize

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 72 of 85

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

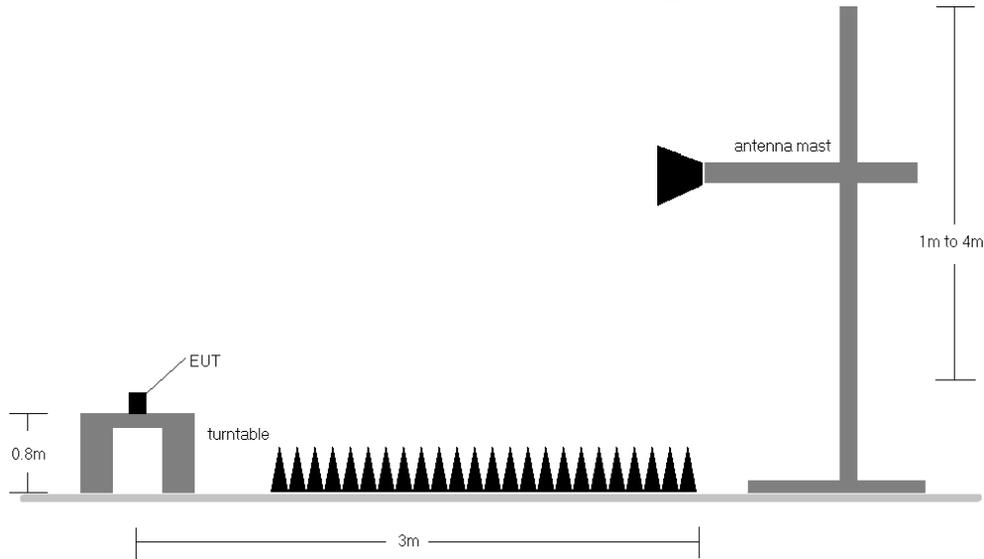



Figure 7-8. Test Instrument & Measurement Setup

Test Notes


- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) Radiated spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. The worst case (highest) emissions were found while operating with QPSK modulation with both carriers set to transmit using 1RB.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) No significant emissions were found as a result of two uplink carriers operating contiguously.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 73 of 85


ULCA Band 48

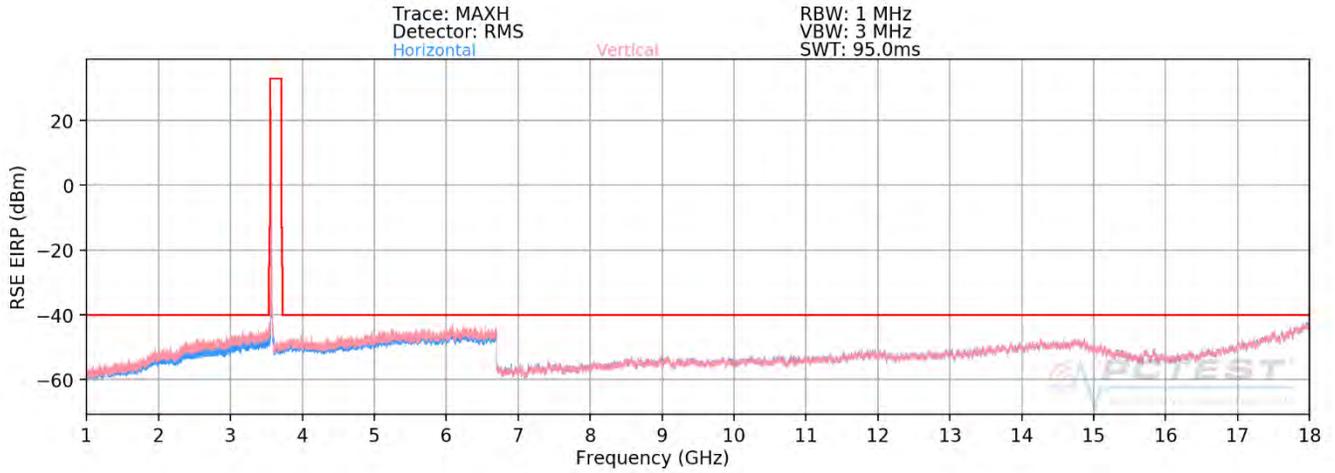

Plot 7-89. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 48) Low Channel – PCC/SCC: 1RB)

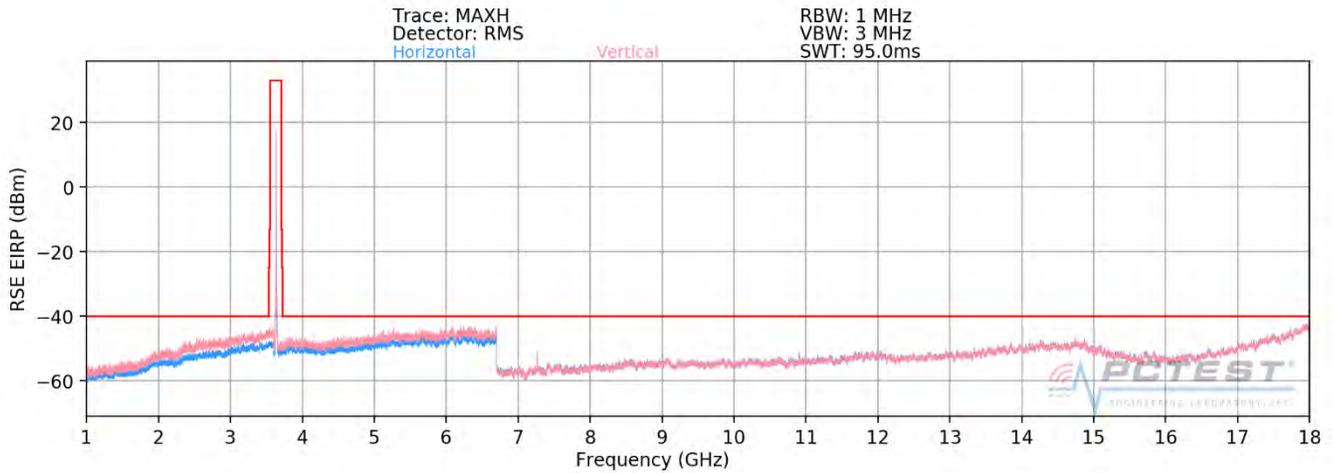


Plot 7-90. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 48) Mid Channel – PCC/SCC: 1RB)

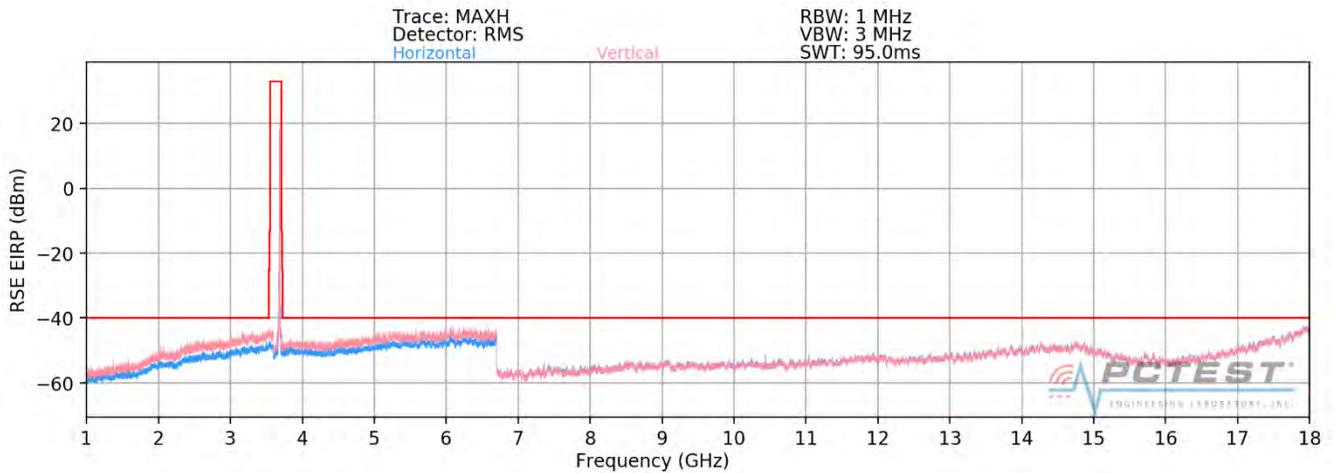

Plot 7-91. Radiated Spurious Plot 1GHz - 18GHz (ULCA Band 48) High Channel – PCC/SCC: 1RB)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 74 of 85

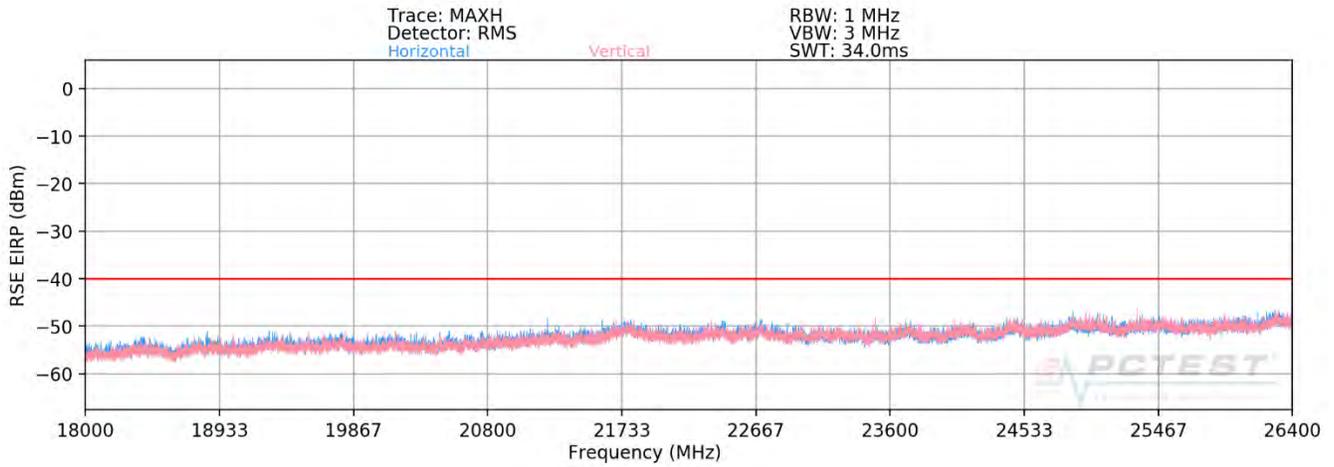

Plot 7-92. Radiated Spurious Plot 18GHz – 26.5GHz (ULCA Band 48)

OPERATING FREQUENCY (PCC): 3560.00 MHz
 OPERATING FREQUENCY (SCC): 3579.80 MHz
 CHANNEL (PCC): 55340
 CHANNEL (SCC): 55538
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -40 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turtable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
7120.00	V	113	19	-60.88	8.63	-52.25	-12.3
10680.00	V	128	269	-59.44	9.41	-50.03	-10.0
14240.00	V	370	0	-58.37	8.82	-49.55	-9.5

Table 7-12. Radiated Spurious Data (ULCA 48) PCC: RB 1 Offset 99, SCC: RB 1 Offset 0 – Low Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 75 of 85	



OPERATING FREQUENCY (PCC): 3625.00 MHz
 OPERATING FREQUENCY (SCC): 3644.80 MHz
 CHANNEL (PCC): 55990
 CHANNEL (SCC): 56188
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -40 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
7250.00	V	381	20	-60.50	8.41	-52.09	-12.1
10875.00	V	114	5	-60.40	9.27	-51.13	-11.1
14500.00	V	-	-	-60.36	8.84	-51.52	-11.5

Table 7-13. Radiated Spurious Data (ULCA 48) PCC: RB 1 Offset 99, SCC: RB 1 Offset 0 – Mid Channel)

OPERATING FREQUENCY (PCC): 3690.00 MHz
 OPERATING FREQUENCY (SCC): 3670.20 MHz
 CHANNEL (PCC): 56640
 CHANNEL (SCC): 56442
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -40 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
7380.00	V	121	10	-63.07	8.41	-54.66	-14.7
11070.00	V	111	17	-60.07	9.31	-50.76	-10.8
14760.00	V	-	-	-60.01	8.72	-51.29	-11.3

Table 7-14. Radiated Spurious Data (ULCA 48) PCC: RB 1 Offset 0, SCC: RB 1 Offset 99 – High Channel)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 76 of 85	

7.10 Frequency Stability / Temperature Variation

§2.1055

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 96, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 77 of 85	

LTE Band 48 Frequency Stability Measurements

OPERATING FREQUENCY: 3,625,000,000 Hz
 REFERENCE VOLTAGE: 4.30 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.30	- 30	3,625,000,016	16	0.0000004
100 %		- 20	3,624,999,894	-106	-0.0000029
100 %		- 10	3,624,999,727	-273	-0.0000075
100 %		0	3,624,999,999	-1	0.0000000
100 %		+ 10	3,625,000,000	0	0.0000000
100 %		+ 20	3,625,000,019	19	0.0000005
100 %		+ 30	3,625,000,009	9	0.0000002
100 %		+ 40	3,625,000,078	78	0.0000022
100 %		+ 50	3,624,999,745	-255	-0.0000070
BATT. ENDPOINT	2.76	+ 20	3,624,999,848	-152	-0.0000042

Table 7-15. Frequency Stability Data (LTE Band 48)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 78 of 85	

LTE Band 48 Frequency Stability Measurements

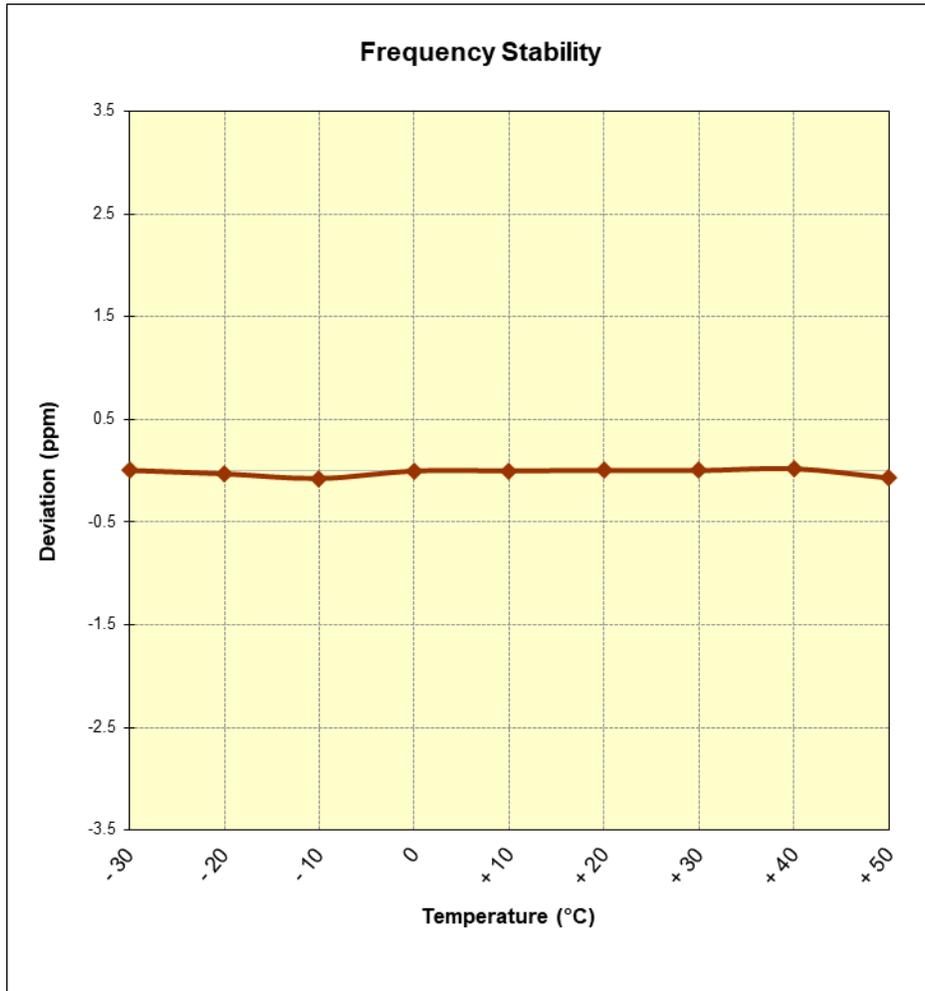


Figure 7-9. Frequency Stability Graph (LTE Band 48)

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M191140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 79 of 85	

7.11 End User Device Additional Requirement (CBSD Protocol)
§96.47

Test Overview and Limit

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified CBSD (Ruckus FCC ID: S9GQ910US00) as a companion device to show compliance with Part 96.47.

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

Test Procedure Used

KDB 940660 D01 v02, WINNF-TS-0122 V1.0.0.

Test Setup/Method

The EUT was connected via an RF cable to a certified CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRs CBSD Test Specification.


1. Run#1:
 - a. Setup WINNF.PT.C.HBT.1 with 3615MHz – 3635MHz.
 - b. Enable AP service from Ruckus Cloud management.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.
2. Run#2:
 - a. Setup WINNF.PT.C.HBT.1 with 3660MHz – 3680MHz.
 - b. Enable AP service from Ruckus Cloud management.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.

Test Notes


The EUT is an End User Device.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset	Page 80 of 85	

Run#1:

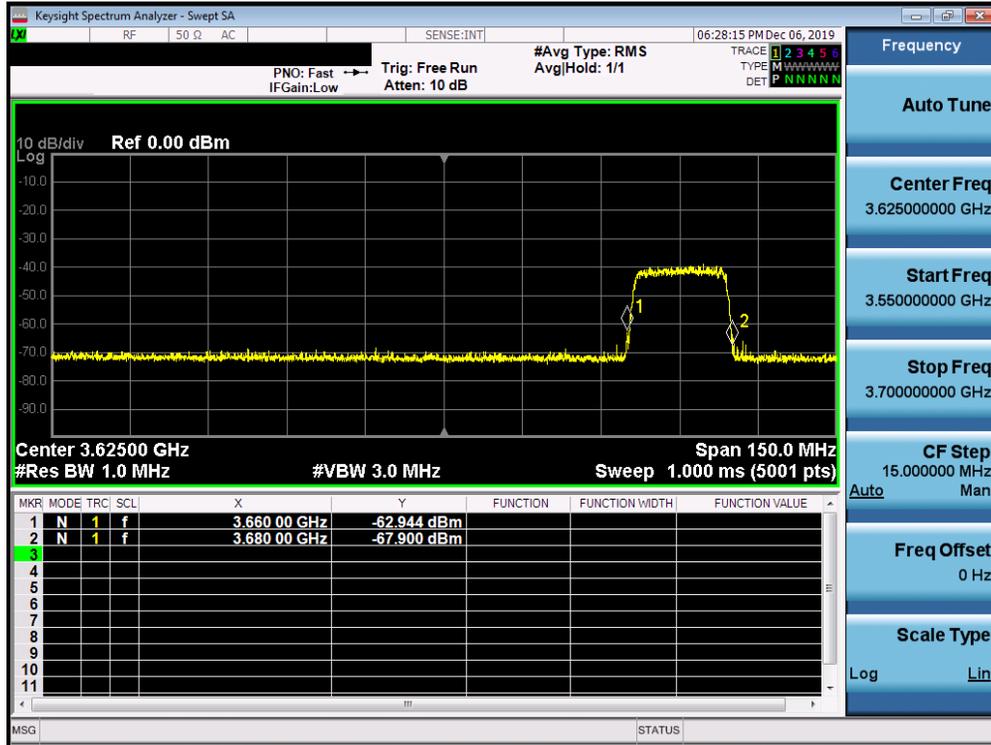

Plot 7-93. Run#1 End User Device Frequency of Operations

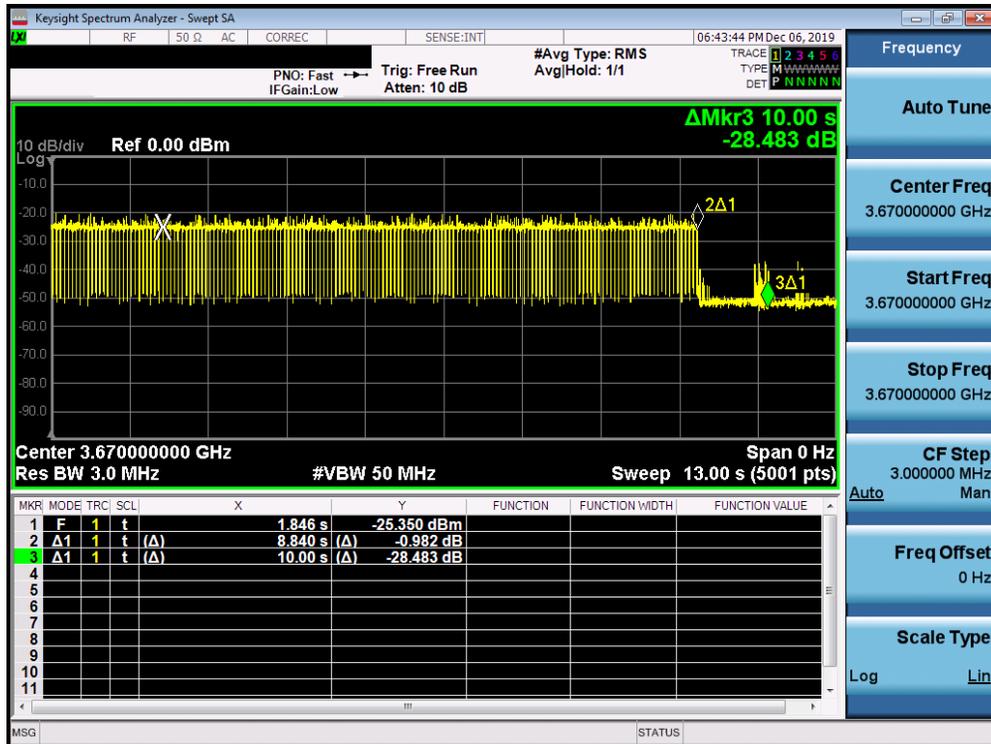

Plot 7-94. Run#1 End User Device Discontinues Operations within 10s

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 81 of 85




Note:


- Marker 1: CBSD sends instructions to discontinue LTE operations.
- Marker 2: EUT discontinues operation.
- Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 82 of 85

Run#2:

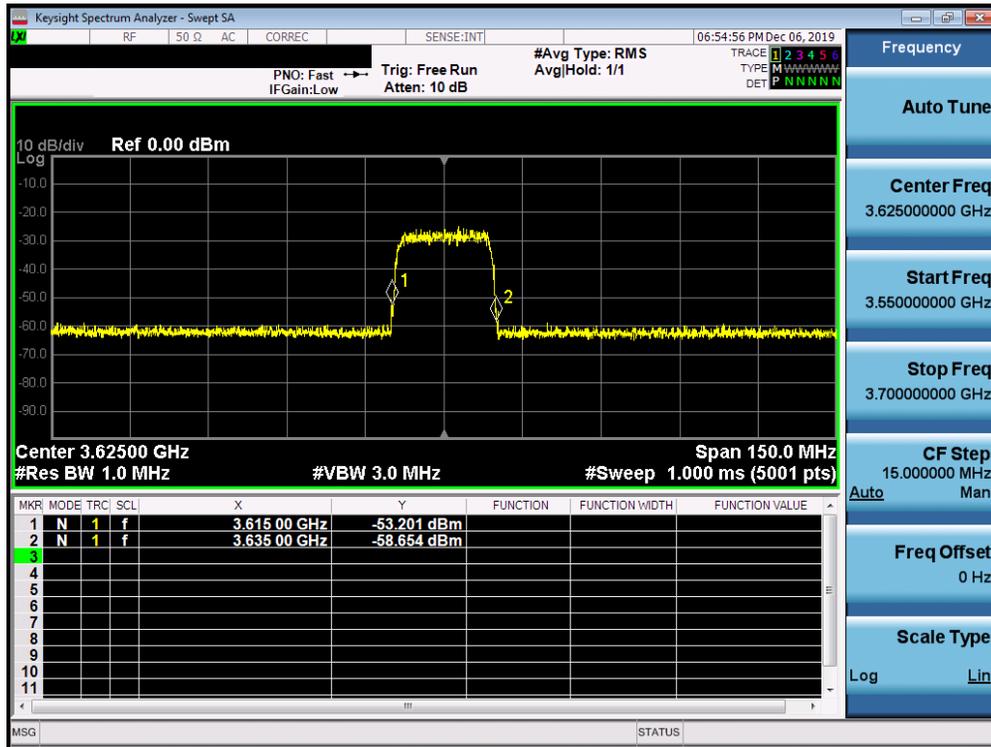

Plot 7-95. Run#2 End User Device Frequency of Operations

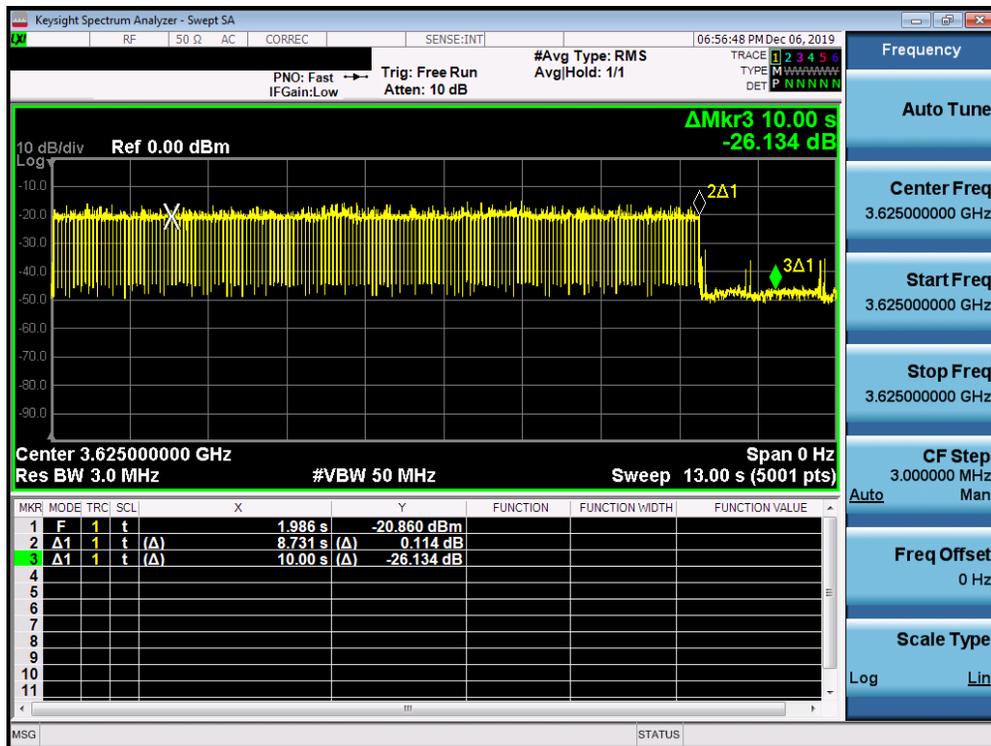

Plot 7-96. Run#2 End User Device Discontinues Operations within 10s

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 83 of 85



Note:

- Marker 1: CBSD sends instructions to discontinue LTE operations.
- Marker 2: EUT discontinues operation.
- Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 84 of 85

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMG988U** complies with all of the End User Device requirements of Part 96 of the FCC Rules for LTE operation only.

FCC ID: A3LSMG988U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911140187-05-R1.A3L	Test Dates: 11/14/2019 - 1/31/2020	EUT Type: Portable Handset		Page 85 of 85