

FCC LTE REPORT

Certification

Applicant Name:
 SAMSUNG Electronics Co., Ltd.

Date of Issue:
 June 17, 2022

Address:
 129, Samsung-ro, Yeongtong-gu,
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
 HCT CO., LTD.,
 74, Seoicheon-ro 578beon-gil, Majang-myeon,
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2206-FC020

FCC ID: A3LSMG990B2

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-G990B2/DS
 Additional Model(s): SM-G990B2
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §90, §22, §2

| Mode (MHz) | Tx Frequency (MHz) | Emission Designator | Modulation | Conducted Output Power | |
|--------------------|--------------------|---------------------|------------|------------------------|------------------|
| | | | | Max. Power (W) | Max. Power (dBm) |
| LTE – Band26 (1.4) | 814.7 – 824.0 | 1M09G7D | QPSK | 0.229 | 23.60 |
| | | 1M09W7D | 16QAM | 0.204 | 23.10 |
| | | 1M09W7D | 64QAM | 0.155 | 21.89 |
| | | 1M09W7D | 256QAM | 0.076 | 18.82 |
| LTE – Band26 (3) | 815.5 – 824.0 | 2M71G7D | QPSK | 0.245 | 23.90 |
| | | 2M70W7D | 16QAM | 0.213 | 23.28 |
| | | 2M70W7D | 64QAM | 0.161 | 22.06 |
| | | 2M70W7D | 256QAM | 0.076 | 18.80 |
| LTE – Band26 (5) | 816.5 – 824.0 | 4M50G7D | QPSK | 0.242 | 23.83 |
| | | 4M48W7D | 16QAM | 0.217 | 23.37 |
| | | 4M50W7D | 64QAM | 0.161 | 22.08 |
| | | 4M50W7D | 256QAM | 0.079 | 19.00 |
| LTE – Band26 (10) | 819.0 – 824.0 | 8M97G7D | QPSK | 0.230 | 23.61 |
| | | 8M96W7D | 16QAM | 0.216 | 23.34 |
| | | 9M96W7D | 64QAM | 0.157 | 21.95 |
| | | 8M99W7D | 256QAM | 0.076 | 18.79 |
| LTE – Band26 (15) | 821.5 | 13M5G7D | QPSK | 0.236 | 23.72 |
| | | 13M5W7D | 16QAM | 0.223 | 23.48 |
| | | 13M4W7D | 64QAM | 0.160 | 22.03 |
| | | 13M5W7D | 256QAM | 0.078 | 18.94 |

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report No.: HCT-RF-2206-FC020

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

| TEST REPORT NO. | DATE | DESCRIPTION |
|-------------------|---------------|-------------------------|
| HCT-RF-2206-FC020 | June 17, 2022 | - First Approval Report |

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

| | |
|--|-----|
| REVIEWED BY | 2 |
| 1. GENERAL INFORMATION | 5 |
| 2. INTRODUCTION | 6 |
| 2.1. DESCRIPTION OF EUT..... | 6 |
| 2.2. MEASURING INSTRUMENT CALIBRATION | 6 |
| 2.3. TEST FACILITY | 6 |
| 3. DESCRIPTION OF TESTS..... | 7 |
| 3.1 TEST PROCEDURE | 7 |
| 3.2 CONDUCTED OUTPUT POWER..... | 8 |
| 3.3 RADIATED POWER..... | 9 |
| 3.4 RADIATED SPURIOUS EMISSIONS | 10 |
| 3.5 OCCUPIED BANDWIDTH. | 11 |
| 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL | 12 |
| 3.7 CHANNEL EDGE..... | 13 |
| 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE | 14 |
| 3.9 WORST CASE(RADIATED TEST) | 15 |
| 3.10 WORST CASE(CONDUCTED TEST) | 16 |
| 4. LIST OF TEST EQUIPMENT | 17 |
| 5. MEASUREMENT UNCERTAINTY | 18 |
| 6. SUMMARY OF TEST RESULTS | 19 |
| 7. SAMPLE CALCULATION | 20 |
| 8. TEST DATA | 22 |
| 8.1 CONDUCTED OUTPUT POWER..... | 22 |
| 8.2 EFFECTIVE RADIATED POWER..... | 27 |
| 8.3 RADIATED SPURIOUS EMISSIONS | 29 |
| 8.4 OCCUPIED BANDWIDTH | 30 |
| 8.5 CONDUCTED SPURIOUS EMISSIONS | 31 |
| 8.6 CHANNEL EDGE..... | 31 |
| 8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE | 32 |
| 8.8 STADDLE CHANNEL | 37 |
| 8.8.1 CONDUCTED OUTPUT POWER..... | 37 |
| 8.8.2 EFFECTIVE RADIATED POWER | 41 |
| 8.8.3 RADIATED SPURIOUS EMISSIONS | 42 |
| 8.8.4 CONDUCTED SPURIOUS EMISSIONS | 43 |
| 8.8.5 CHANNEL EDGE(Part90) | 43 |
| 8.8.6 BAND EDGE(Part22) | 43 |
| 9. TEST PLOTS..... | 44 |
| 10. TEST PLOTS (STRADDLE CHANNEL)..... | 93 |
| 11 ANNEX A_ TEST SETUP PHOTO | 118 |

MEASUREMENT REPORT

1. GENERAL INFORMATION

| | |
|-----------------------------|---|
| Applicant Name: | SAMSUNG Electronics Co., Ltd. |
| Address: | 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea |
| FCC ID: | A3LSMG990B2 |
| Application Type: | Certification |
| FCC Classification: | PCS Licensed Transmitter Held to Ear (PCE) |
| FCC Rule Part(s): | §90, §22, §2 |
| EUT Type: | Mobile phone |
| Model(s): | SM-G990B2/DS |
| Additional Model(s): | SM-G990B2 |
| Tx Frequency: | 814.7 MHz – 823.3 MHz (LTE – Band 26 (1.4 MHz)) 815.5 MHz – 822.5 MHz (LTE – Band 26 (3 MHz)) 816.5 MHz – 821.5 MHz (LTE – Band 26 (5 MHz)) 819.0 MHz (LTE – Band 26 (10 MHz)) 821.5 MHz (LTE – Band 26 (15 MHz)) |
| Date(s) of Tests: | May 26, 2022~ June 09, 2022 |
| Serial number: | Radiated: R3CT40C5N2R Conducted: R3CT40C5GEE |

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80), Bluetooth, BT LE, NFC, WPT.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

| Test Description | Test Procedure Used |
|---|---|
| Occupied Bandwidth | - KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4 |
| Channel Edge | - KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 |
| Spurious and Harmonic Emissions at Antenna Terminal | - KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 |
| Conducted Output Power | - KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2 |
| Frequency stability | - ANSI C63.26-2015 – Section 5.6 |
| Effective Radiated Power/ Effective Isotropic Radiated Power | - KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17 |
| Radiated Spurious and Harmonic Emissions | - KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12 |

3.2 CONDUCTED OUTPUT POWER

Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

Test setup

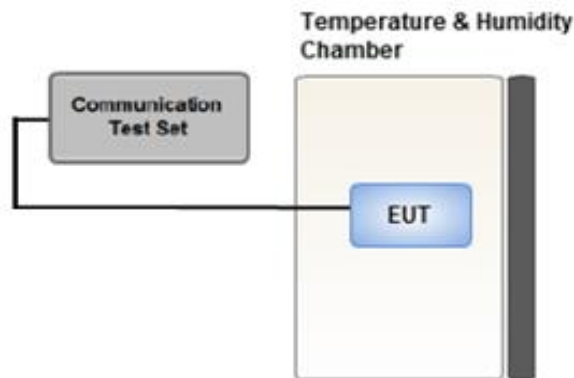

3.3 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.4 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.5 OCCUPIED BANDWIDTH.

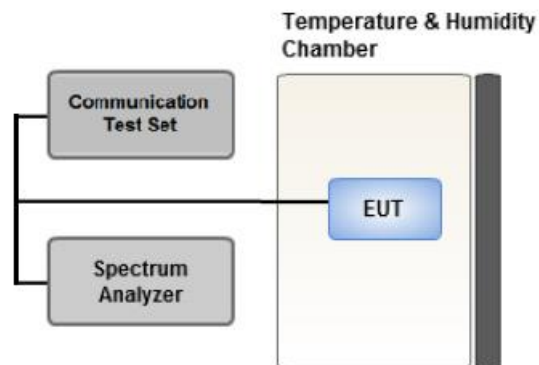

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL



Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 CHANNEL EDGE



Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW :
 - .- EA licensee's frequency block by up to and including 37.5 kHz : 300 Hz
 - .- EA licensee's frequency block greater than 37.5 kHz : 100 kHz
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

For 90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz}/ \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

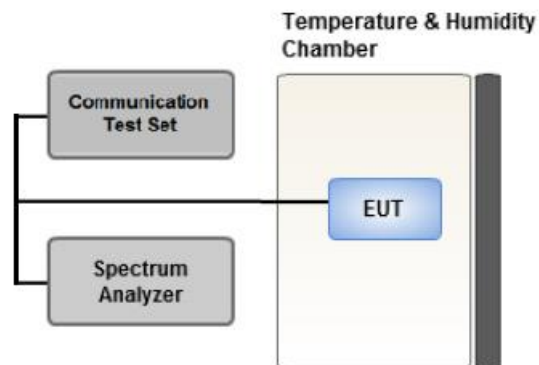

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
 Mode : Stand alone, Simultaneous transmission scenarios
 Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 3 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- All modes of operation were tested and the worst case results are reported.
- Please refer to the table below.
- SM-G990B2/DS & additional models were tested and the worst case results are reported.
 (Worst case : SM-G990B2/DS)

[Worst case]

| Test Description | Modulation | RB size | RB offset | Axis |
|---|-------------------------------------|---------|-----------|------|
| Effective Radiated Power | QPSK, 16QAM, 64QAM, 256QAM | 1 | 0 | Y |
| Radiated Spurious and Harmonic Emissions | QPSK | 1 | 0 | X |

3.10 WORST CASE(CONDUCTED TEST)

-Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

- SM-G990B2/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-G990B2/DS)

[Worst case]

| Test Description | Modulation | Bandwidth (MHz) | Frequency | RB size | RB offset |
|---|----------------------------|-----------------|-----------|---------|-----------|
| Occupied Bandwidth | QPSK, 16QAM, 64QAM, 256QAM | 1.4, 3, 5 | High | Full RB | 0 |
| | QPSK, 16QAM, 64QAM, 256QAM | 10, 15 | Mid | Full RB | 0 |
| Channel Edge | QPSK | 1.4 | Low | 1 | 0 |
| | | | High | 1 | 5 |
| | | 3 | Low | 1 | 0 |
| | | | High | 1 | 14 |
| | | 5 | Low | 1 | 0 |
| | | | High | 1 | 24 |
| | | 10 | Mid | 1 | 0 |
| | | | | 1 | 49 |
| | | 15 | Mid | 1 | 0 |
| | | | | 1 | 74 |
| 1.4, 3, 5 | Low, High | Full RB | 0 | | |
| 10, 15 | Mid | Full RB | 0 | | |
| Band Edge (Staddle Channel) | QPSK | 1.4 | Mid | 1 | 5 |
| | | 3 | Mid | 1 | 14 |
| | | 5 | Mid | 1 | 24 |
| | | 10 | Mid | 1 | 49 |
| | | 1.4, 3, 5 10 | Mid | Full RB | 0 |
| Spurious and Harmonic Emissions at Antenna Terminal | QPSK | 1.4, 3, 5 | Low, High | 1 | 0 |
| | | 10, 15 | Mid | 1 | 0 |

4. LIST OF TEST EQUIPMENT

| Equipment | Model | Manufacturer | Serial No. | Due to Calibration | Calibration Interval |
|--|----------------------------|------------------|-------------|--------------------|----------------------|
| H.P.F | FBSR-02B(WHK1.2/15 G-10EF) | T&M SYSTEM | - | 02/18/2023 | Annual |
| H.P.F | FBSR-02B(WHK3.3/18 G-10EF) | T&M SYSTEM | - | 02/18/2023 | Annual |
| Power Splitter(DC ~ 26.5 GHz) | 11667B | Hewlett Packard | 11275 | 03/11/2023 | Annual |
| DC Power Supply | E3632A | Agilent | MY40010147 | 06/28/2022 | Annual |
| Dipole Antenna | UHAP | Schwarzbeck | 557 | 04/05/2023 | Biennial |
| Dipole Antenna | UHAP | Schwarzbeck | 558 | 04/05/2023 | Biennial |
| Chamber | SU-642 | ESPEC | 93008124 | 03/04/2023 | Annual |
| Horn Antenna(1 ~ 18 GHz) | BBHA 9120D | Schwarzbeck | 147 | 08/30/2022 | Biennial |
| Horn Antenna(1 ~ 18 GHz) | BBHA 9120D | Schwarzbeck | 9120D-1298 | 09/15/2023 | Biennial |
| Horn Antenna(15 ~ 40 GHz) | BBHA 9170 | Schwarzbeck | BBHA9170342 | 10/13/2022 | Biennial |
| Horn Antenna(15 ~ 40 GHz) | BBHA 9170 | Schwarzbeck | BBHA9170124 | 04/12/2023 | Biennial |
| Signal Analyzer(10 Hz ~ 26.5 GHz) | N9020A | Agilent | MY52090906 | 05/02/2023 | Annual |
| ATTENUATOR(20 dB) | 8493C | Hewlett Packard | 17280 | 05/18/2023 | Annual |
| Spectrum Analyzer(10 Hz ~ 40 GHz) | FSV40 | REOHDE & SCHWARZ | 100931 | 09/29/2022 | Annual |
| Base Station | 8960 (E5515C) | Agilent | MY48360800 | 08/18/2022 | Annual |
| Loop Antenna(9 kHz ~ 30 MHz) | FMZB1513 | Schwarzbeck | 1513-333 | 03/17/2024 | Biennial |
| Bilog Antenna | VULB9160 | Schwarzbeck | 3150 | 03/03/2023 | Biennial |
| Hybrid Antenna | VULB9168 | Schwarzbeck | 760 | 02/22/2023 | Biennial |
| Wideband Radio Communication Tester | MT8821C | Anritsu Corp. | 6262116770 | 07/12/2022 | Annual |
| Wideband Radio Communication Tester | MT8820C | Anritsu Corp. | 6200863156 | 12/29/2022 | Annual |
| SIGNAL GENERATOR (100 kHz ~ 40 GHz) | SMB100A | REOHDE & SCHWARZ | 177633 | 07/05/2022 | Annual |
| Signal Analyzer(5 Hz ~ 40.0 GHz) | N9030B | KEYSIGHT | MY55480167 | 05/30/2023 | Annual |
| FCC LTE Mobile Conducted RF Automation Test Software | - | HCT CO., LTD., | - | - | - |

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter | Expanded Uncertainty (\pm dB) |
|--|--|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 2.00 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (9 kHz ~ 30 MHz) | 4.40 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (30 MHz ~ 1 GHz) | 5.74 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (1 GHz ~ 18 GHz) | 5.51 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (18 GHz ~ 40 GHz) | 5.92 (Confidence level about 95 %, $k=2$) |
| Radiated Disturbance (Above 40 GHz) | 5.48 (Confidence level about 95 %, $k=2$) |

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

| Test Description | FCC Part Section(s) | Test Limit | Test Result |
|---|--------------------------------|--|-------------|
| Occupied Bandwidth | §2.1049 | N/A | PASS |
| Channel Edge / Spurious and Harmonic Emissions at Antenna Terminal. | §2.1051, §90.691 | < 50 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5 kHz of Block Edge | PASS |
| Band Edge / Spurious and Harmonic Emissions at Antenna Terminal. | §2.1051, §22.917(a) | < 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions | PASS |
| Conducted Output Power | §2.1046 §90.635 | < 100 Watts | PASS |
| Frequency stability / variation of ambient temperature | §2.1055, §90.213 §22.355 | < 2.5 ppm | PASS |

6.2 Test Condition : Radiated Test

| Test Description | FCC Part Section(s) | Test Limit | Test Result |
|--|-----------------------------------|---|-------------|
| Effective Radiated Power | §22.913(a)(5) | < 7 Watts max. ERP (Only 15 MHz B.W) | PASS |
| Radiated Spurious and Harmonic Emissions | §2.1053, §90.691 §22.917(a) | < 43 + 10log10 (P[Watts]) for all out-of band emissions | PASS |

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

| Ch./ Freq. | | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol. | ERP | |
|------------|------------|----------------------|------------------------|-----------------|------|------|-------|-------|
| channel | Freq.(MHz) | | | | | | W | dBm |
| 128 | 824.20 | -21.37 | 38.40 | -10.61 | 0.95 | H | 0.483 | 26.84 |

$$ERP = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

| Ch./ Freq. | | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBi) | C.L | Pol. | EIRP | |
|------------|------------|----------------------|------------------------|-----------------|------|------|-------|-------|
| channel | Freq.(MHz) | | | | | | W | dBm |
| 20175 | 1,732.50 | -15.75 | 18.45 | 9.90 | 1.76 | H | 0.456 | 26.59 |

$$EIRP = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 CONDUCTED OUTPUT POWER

| Band Width | Modulation | RB Size | RB Offset | Max. output power(dBm) | | | | Limit (W) |
|------------|------------|---------|-----------|------------------------|-------|-----------|-------|-----------|
| | | | | 814.7 MHz | | 823.3 MHz | | |
| | | | | dBm | W | dBm | W | |
| 1.4 | QPSK | 1 | 0 | 23.40 | 0.219 | 23.51 | 0.224 | 100 |
| | | 1 | 3 | 23.53 | 0.225 | 23.60 | 0.229 | 100 |
| | | 1 | 5 | 23.39 | 0.218 | 23.48 | 0.223 | 100 |
| | | 3 | 0 | 23.46 | 0.222 | 23.52 | 0.225 | 100 |
| | | 3 | 1 | 23.49 | 0.223 | 23.55 | 0.226 | 100 |
| | | 3 | 3 | 23.48 | 0.223 | 23.54 | 0.226 | 100 |
| | | 6 | 0 | 22.60 | 0.182 | 22.73 | 0.187 | 100 |
| | 16QAM | 1 | 0 | 22.60 | 0.182 | 22.75 | 0.188 | 100 |
| | | 1 | 3 | 22.86 | 0.193 | 23.10 | 0.204 | 100 |
| | | 1 | 5 | 22.81 | 0.191 | 23.08 | 0.203 | 100 |
| | | 3 | 0 | 22.81 | 0.191 | 22.88 | 0.194 | 100 |
| | | 3 | 1 | 22.65 | 0.184 | 22.95 | 0.197 | 100 |
| | | 3 | 3 | 22.62 | 0.183 | 22.86 | 0.193 | 100 |
| | | 6 | 0 | 21.66 | 0.147 | 21.78 | 0.151 | 100 |
| | 64QAM | 1 | 0 | 21.64 | 0.146 | 21.77 | 0.150 | 100 |
| | | 1 | 3 | 21.70 | 0.148 | 21.87 | 0.154 | 100 |
| | | 1 | 5 | 21.71 | 0.148 | 21.89 | 0.155 | 100 |
| | | 3 | 0 | 21.64 | 0.146 | 21.75 | 0.150 | 100 |
| | | 3 | 1 | 21.70 | 0.148 | 21.79 | 0.151 | 100 |
| | | 3 | 3 | 21.70 | 0.148 | 21.83 | 0.152 | 100 |
| | | 6 | 0 | 20.62 | 0.115 | 20.69 | 0.117 | 100 |
| | 256QAM | 1 | 0 | 18.65 | 0.073 | 18.72 | 0.074 | 100 |
| | | 1 | 3 | 18.62 | 0.073 | 18.80 | 0.076 | 100 |
| | | 1 | 5 | 18.65 | 0.073 | 18.75 | 0.075 | 100 |
| | | 3 | 0 | 18.65 | 0.073 | 18.76 | 0.075 | 100 |
| | | 3 | 1 | 18.70 | 0.074 | 18.73 | 0.075 | 100 |
| | | 3 | 3 | 18.72 | 0.074 | 18.82 | 0.076 | 100 |
| | | 6 | 0 | 18.57 | 0.072 | 18.63 | 0.073 | 100 |

| Band Width | Modulation | RB Size | RB Offset | Max. output power(dBm) | | | | Limit (W) |
|------------|------------|---------|-----------|------------------------|-------|-----------|-------|-----------|
| | | | | 815.5 MHz | | 822.5 MHz | | |
| | | | | dBm | W | dBm | W | |
| 3 | QPSK | 1 | 0 | 23.51 | 0.224 | 23.80 | 0.240 | 100 |
| | | 1 | 7 | 23.40 | 0.219 | 23.90 | 0.245 | 100 |
| | | 1 | 14 | 23.50 | 0.224 | 23.77 | 0.238 | 100 |
| | | 8 | 0 | 22.71 | 0.187 | 22.85 | 0.193 | 100 |
| | | 8 | 3 | 22.62 | 0.183 | 22.88 | 0.194 | 100 |
| | | 8 | 7 | 22.60 | 0.182 | 22.90 | 0.195 | 100 |
| | | 15 | 0 | 22.65 | 0.184 | 22.82 | 0.191 | 100 |
| | 16QAM | 1 | 0 | 22.96 | 0.198 | 23.28 | 0.213 | 100 |
| | | 1 | 7 | 22.84 | 0.192 | 23.19 | 0.208 | 100 |
| | | 1 | 14 | 22.88 | 0.194 | 23.16 | 0.207 | 100 |
| | | 8 | 0 | 21.71 | 0.148 | 21.90 | 0.155 | 100 |
| | | 8 | 3 | 21.80 | 0.151 | 21.96 | 0.157 | 100 |
| | | 8 | 7 | 21.74 | 0.149 | 21.98 | 0.158 | 100 |
| | | 15 | 0 | 21.67 | 0.147 | 21.89 | 0.155 | 100 |
| | 64QAM | 1 | 0 | 22.06 | 0.161 | 21.87 | 0.154 | 100 |
| | | 1 | 7 | 21.74 | 0.149 | 22.01 | 0.159 | 100 |
| | | 1 | 14 | 21.73 | 0.149 | 22.06 | 0.161 | 100 |
| | | 8 | 0 | 20.66 | 0.116 | 20.47 | 0.111 | 100 |
| | | 8 | 3 | 20.73 | 0.118 | 20.75 | 0.119 | 100 |
| | | 8 | 7 | 20.67 | 0.117 | 20.27 | 0.106 | 100 |
| | | 15 | 0 | 20.69 | 0.117 | 20.09 | 0.102 | 100 |
| | 256QAM | 1 | 0 | 18.74 | 0.075 | 18.65 | 0.073 | 100 |
| | | 1 | 7 | 18.80 | 0.076 | 18.74 | 0.075 | 100 |
| | | 1 | 14 | 18.71 | 0.074 | 18.79 | 0.076 | 100 |
| | | 8 | 0 | 18.66 | 0.073 | 18.64 | 0.073 | 100 |
| | | 8 | 3 | 18.74 | 0.075 | 18.67 | 0.074 | 100 |
| | | 8 | 7 | 18.71 | 0.074 | 18.68 | 0.074 | 100 |
| | | 15 | 0 | 18.69 | 0.074 | 18.62 | 0.073 | 100 |

| Band Width | Modulation | RB Size | RB Offset | Max. output power(dBm) | | | | Limit (W) |
|------------|------------|---------|-----------|------------------------|-------|-----------|-------|-----------|
| | | | | 816.5 MHz | | 821.5 MHz | | |
| | | | | dBm | W | dBm | W | |
| 5 | QPSK | 1 | 0 | 23.41 | 0.219 | 23.66 | 0.232 | 100 |
| | | 1 | 12 | 23.42 | 0.220 | 23.77 | 0.238 | 100 |
| | | 1 | 24 | 23.48 | 0.223 | 23.83 | 0.242 | 100 |
| | | 12 | 0 | 22.60 | 0.182 | 22.89 | 0.195 | 100 |
| | | 12 | 6 | 22.70 | 0.186 | 22.90 | 0.195 | 100 |
| | | 12 | 11 | 22.68 | 0.185 | 22.91 | 0.195 | 100 |
| | | 25 | 0 | 22.61 | 0.182 | 22.80 | 0.191 | 100 |
| | 16QAM | 1 | 0 | 22.69 | 0.186 | 23.27 | 0.212 | 100 |
| | | 1 | 12 | 22.90 | 0.195 | 23.19 | 0.208 | 100 |
| | | 1 | 24 | 22.80 | 0.191 | 23.37 | 0.217 | 100 |
| | | 12 | 0 | 21.67 | 0.147 | 21.94 | 0.156 | 100 |
| | | 12 | 6 | 21.75 | 0.150 | 21.97 | 0.157 | 100 |
| | | 12 | 11 | 21.71 | 0.148 | 22.00 | 0.158 | 100 |
| | | 25 | 0 | 21.65 | 0.146 | 21.84 | 0.153 | 100 |
| | 64QAM | 1 | 0 | 21.89 | 0.155 | 22.00 | 0.158 | 100 |
| | | 1 | 12 | 21.78 | 0.151 | 22.08 | 0.161 | 100 |
| | | 1 | 24 | 21.76 | 0.150 | 22.07 | 0.161 | 100 |
| | | 12 | 0 | 20.64 | 0.116 | 20.86 | 0.122 | 100 |
| | | 12 | 6 | 20.73 | 0.118 | 20.94 | 0.124 | 100 |
| | | 12 | 11 | 20.71 | 0.118 | 21.00 | 0.126 | 100 |
| | | 25 | 0 | 20.64 | 0.116 | 20.82 | 0.121 | 100 |
| | 256QAM | 1 | 0 | 18.63 | 0.073 | 18.79 | 0.076 | 100 |
| | | 1 | 12 | 18.61 | 0.073 | 19.00 | 0.079 | 100 |
| | | 1 | 24 | 18.72 | 0.074 | 18.97 | 0.079 | 100 |
| | | 12 | 0 | 18.53 | 0.071 | 18.80 | 0.076 | 100 |
| | | 12 | 6 | 18.66 | 0.073 | 18.91 | 0.078 | 100 |
| | | 12 | 11 | 18.67 | 0.074 | 18.90 | 0.078 | 100 |
| | | 25 | 0 | 18.59 | 0.072 | 18.83 | 0.076 | 100 |

| Band Width | Modulation | RB Size | RB Offset | Max. output power(dBm) | | Limit (W) |
|------------|------------|---------|-----------|------------------------|-------|-----------|
| | | | | 819 MHz | | |
| | | | | dBm | W | |
| 10 | QPSK | 1 | 0 | 23.61 | 0.230 | 100 |
| | | 1 | 24 | 23.45 | 0.221 | 100 |
| | | 1 | 49 | 23.43 | 0.220 | 100 |
| | | 25 | 0 | 22.53 | 0.179 | 100 |
| | | 25 | 12 | 22.70 | 0.186 | 100 |
| | | 25 | 24 | 22.69 | 0.186 | 100 |
| | | 50 | 0 | 22.65 | 0.184 | 100 |
| | 16QAM | 1 | 0 | 23.03 | 0.201 | 100 |
| | | 1 | 24 | 23.28 | 0.213 | 100 |
| | | 1 | 49 | 23.34 | 0.216 | 100 |
| | | 25 | 0 | 21.56 | 0.143 | 100 |
| | | 25 | 12 | 21.71 | 0.148 | 100 |
| | | 25 | 24 | 21.72 | 0.149 | 100 |
| | | 50 | 0 | 21.69 | 0.148 | 100 |
| | 64QAM | 1 | 0 | 21.95 | 0.157 | 100 |
| | | 1 | 24 | 21.79 | 0.151 | 100 |
| | | 1 | 49 | 21.91 | 0.155 | 100 |
| | | 25 | 0 | 20.58 | 0.114 | 100 |
| | | 25 | 12 | 20.87 | 0.122 | 100 |
| | | 25 | 24 | 20.63 | 0.116 | 100 |
| | | 50 | 0 | 20.70 | 0.117 | 100 |
| | 256QAM | 1 | 0 | 18.39 | 0.069 | 100 |
| | | 1 | 24 | 18.79 | 0.076 | 100 |
| | | 1 | 49 | 18.57 | 0.072 | 100 |
| | | 25 | 0 | 18.50 | 0.071 | 100 |
| | | 25 | 12 | 18.75 | 0.075 | 100 |
| | | 25 | 24 | 18.61 | 0.073 | 100 |
| | | 50 | 0 | 18.62 | 0.073 | 100 |

| Band Width | Modulation | RB Size | RB Offset | Max. output power(dBm) | | Limit (W) |
|------------|------------|---------|-----------|------------------------|-------|-----------|
| | | | | 821.5 MHz | | |
| | | | | dBm | W | |
| 15 | QPSK | 1 | 0 | 23.70 | 0.234 | 100 |
| | | 1 | 36 | 23.61 | 0.230 | 100 |
| | | 1 | 74 | 23.72 | 0.236 | 100 |
| | | 36 | 0 | 22.64 | 0.184 | 100 |
| | | 36 | 18 | 22.72 | 0.187 | 100 |
| | | 36 | 39 | 22.78 | 0.190 | 100 |
| | | 75 | 0 | 22.70 | 0.186 | 100 |
| | 16QAM | 1 | 0 | 23.45 | 0.221 | 100 |
| | | 1 | 36 | 23.48 | 0.223 | 100 |
| | | 1 | 74 | 23.44 | 0.221 | 100 |
| | | 36 | 0 | 21.60 | 0.145 | 100 |
| | | 36 | 18 | 21.71 | 0.148 | 100 |
| | | 36 | 39 | 21.83 | 0.152 | 100 |
| | | 75 | 0 | 21.70 | 0.148 | 100 |
| | 64QAM | 1 | 0 | 21.94 | 0.156 | 100 |
| | | 1 | 36 | 22.03 | 0.160 | 100 |
| | | 1 | 74 | 22.01 | 0.159 | 100 |
| | | 36 | 0 | 20.70 | 0.117 | 100 |
| | | 36 | 18 | 20.84 | 0.121 | 100 |
| | | 36 | 39 | 20.85 | 0.122 | 100 |
| | | 75 | 0 | 20.63 | 0.116 | 100 |
| | 256QAM | 1 | 0 | 18.33 | 0.068 | 100 |
| | | 1 | 36 | 18.94 | 0.078 | 100 |
| | | 1 | 74 | 18.91 | 0.078 | 100 |
| | | 36 | 0 | 18.54 | 0.071 | 100 |
| | | 36 | 18 | 18.73 | 0.075 | 100 |
| | | 36 | 39 | 18.81 | 0.076 | 100 |
| | | 75 | 0 | 18.74 | 0.075 | 100 |

8.2 EFFECTIVE RADIATED POWER

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit | ERP | |
|------------|---------------------|------------|----------------------|------------------------|-----------------|------|-----|-------|-------|-------|
| | | | | | | | | | W | W |
| 814.7 | LTE B26/ 1.4 MHz | QPSK | -31.62 | 30.92 | -10.29 | 1.38 | V | < 100 | 0.084 | 19.25 |
| | | 16QAM | -32.32 | 30.22 | -10.29 | 1.38 | V | | 0.072 | 18.55 |
| | | 64QAM | -33.29 | 29.25 | -10.29 | 1.38 | V | | 0.057 | 17.58 |
| | | 256QAM | -36.38 | 26.16 | -10.29 | 1.38 | V | | 0.028 | 14.49 |
| 823.3 | | QPSK | -31.69 | 31.36 | -10.25 | 1.39 | V | | 0.094 | 19.72 |
| | | 16QAM | -32.34 | 30.71 | -10.25 | 1.39 | V | | 0.081 | 19.07 |
| | | 64QAM | -33.46 | 29.59 | -10.25 | 1.39 | V | | 0.062 | 17.95 |
| | | 256QAM | -36.50 | 26.55 | -10.25 | 1.39 | V | | 0.031 | 14.91 |

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit | ERP | |
|------------|-------------------|------------|----------------------|------------------------|-----------------|------|-----|-------|-------|-------|
| | | | | | | | | | W | W |
| 815.5 | LTE B26/ 3 MHz | QPSK | -31.66 | 30.92 | -10.29 | 1.39 | V | < 100 | 0.084 | 19.25 |
| | | 16QAM | -32.22 | 30.36 | -10.29 | 1.39 | V | | 0.074 | 18.69 |
| | | 64QAM | -33.25 | 29.33 | -10.29 | 1.39 | V | | 0.058 | 17.66 |
| | | 256QAM | -36.38 | 26.20 | -10.29 | 1.39 | V | | 0.028 | 14.53 |
| 822.5 | | QPSK | -31.60 | 31.51 | -10.26 | 1.39 | V | | 0.097 | 19.87 |
| | | 16QAM | -32.14 | 30.97 | -10.26 | 1.39 | V | | 0.086 | 19.33 |
| | | 64QAM | -33.28 | 29.83 | -10.26 | 1.39 | V | | 0.066 | 18.19 |
| | | 256QAM | -36.42 | 26.69 | -10.26 | 1.39 | V | | 0.032 | 15.05 |

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit | ERP | |
|------------|-------------------|------------|----------------------|------------------------|-----------------|------|-----|-------|-------|-------|
| | | | | | | | | | W | W |
| 816.5 | LTE B26/ 5 MHz | QPSK | -31.80 | 30.89 | -10.28 | 1.39 | V | < 100 | 0.084 | 19.22 |
| | | 16QAM | -32.32 | 30.37 | -10.28 | 1.39 | V | | 0.074 | 18.70 |
| | | 64QAM | -33.39 | 29.30 | -10.28 | 1.39 | V | | 0.058 | 17.63 |
| | | 256QAM | -36.53 | 26.16 | -10.28 | 1.39 | V | | 0.028 | 14.49 |
| 821.5 | | QPSK | -31.86 | 31.18 | -10.26 | 1.39 | V | | 0.090 | 19.53 |
| | | 16QAM | -32.38 | 30.66 | -10.26 | 1.39 | V | | 0.080 | 19.01 |
| | | 64QAM | -33.48 | 29.56 | -10.26 | 1.39 | V | | 0.062 | 17.91 |
| | | 256QAM | -36.73 | 26.31 | -10.26 | 1.39 | V | | 0.029 | 14.66 |

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit | ERP | |
|------------|--------------------|------------|----------------------|------------------------|-----------------|------|-----|-------|-------|-------|
| | | | | | | | | | W | W |
| 819.0 | LTE B26/ 10 MHz | QPSK | -31.53 | 31.35 | -10.27 | 1.39 | V | < 100 | 0.093 | 19.69 |
| | | 16QAM | -31.80 | 31.08 | -10.27 | 1.39 | V | | 0.087 | 19.42 |
| | | 64QAM | -33.18 | 29.70 | -10.27 | 1.39 | V | | 0.064 | 18.04 |
| | | 256QAM | -36.63 | 26.25 | -10.27 | 1.39 | V | | 0.029 | 14.59 |

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit | ERP | |
|------------|--------------------|------------|----------------------|------------------------|-----------------|------|-----|--------|-------|-------|
| | | | | | | | | | W | W |
| 821.5 | LTE B26/ 15 MHz | QPSK | -31.57 | 31.47 | -10.26 | 1.39 | V | < 7.00 | 0.096 | 19.82 |
| | | 16QAM | -32.03 | 31.01 | -10.26 | 1.39 | V | | 0.086 | 19.36 |
| | | 64QAM | -33.26 | 29.78 | -10.26 | 1.39 | V | | 0.065 | 18.13 |
| | | 256QAM | -36.57 | 26.47 | -10.26 | 1.39 | V | | 0.030 | 14.82 |

Note

1. Limit: None (for reporting purposes only)

8.3 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | Result (dBm) | Limit |
|------------------|------------|----------------------|-----------------|------------------------|------|-----|--------------|--------|
| 26705 (815.5) | 1 631.00 | -52.69 | 9.50 | -62.65 | 1.98 | V | -55.13 | -13.00 |
| | 2 446.50 | -40.59 | 10.28 | -45.07 | 2.47 | H | -37.25 | -13.00 |
| | 3 262.00 | -57.46 | 11.86 | -58.67 | 2.88 | V | -49.69 | -13.00 |
| 26775 (822.5) | 1 645.00 | -52.48 | 9.65 | -62.83 | 1.99 | V | -55.16 | -13.00 |
| | 2 467.50 | -37.32 | 10.46 | -41.97 | 2.47 | H | -33.98 | -13.00 |
| | 3 290.00 | -57.42 | 12.04 | -58.82 | 2.88 | V | -49.66 | -13.00 |

8.4 OCCUPIED BANDWIDTH

| Band | Band Width | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Data (MHz) |
|---------|------------|-----------------|------------|---------------------|-----------------------|------------|
| Band 26 | 1.4 MHz | 823.3 | QPSK | 6 | 0 | 1.0927 |
| | | | 16QAM | | | 1.0904 |
| | | | 64QAM | | | 1.0932 |
| | | | 256QAM | | | 1.0876 |
| | 3 MHz | 822.5 | QPSK | 15 | | 2.7093 |
| | | | 16QAM | | | 2.7009 |
| | | | 64QAM | | | 2.7016 |
| | | | 256QAM | | | 2.6961 |
| | 5 MHz | 821.5 | QPSK | 25 | | 4.5033 |
| | | | 16QAM | | | 4.4831 |
| | | | 64QAM | | | 4.4999 |
| | | | 256QAM | | | 4.5011 |
| | 10 MHz | 819.0 | QPSK | 50 | | 8.9654 |
| | | | 16QAM | | | 8.9597 |
| | | | 64QAM | | | 8.9568 |
| | | | 256QAM | | | 8.9847 |
| | 15 MHz | 821.5 | QPSK | 75 | | 13.466 |
| | | | 16QAM | | | 13.458 |
| | | | 64QAM | | | 13.429 |
| | | | 256QAM | | | 13.472 |

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 45 ~ 64.

8.5 CONDUCTED SPURIOUS EMISSIONS

| Band | Band Width (MHz) | Frequency (MHz) | Frequency of Maximum Harmonic (GHz) | Factor (dB) | Measurement Maximum Data (dBm) | Result (dBm) | Limit (dBm) |
|------|------------------|-----------------|-------------------------------------|-------------|--------------------------------|--------------|-------------|
| 26 | 1.4 | 814.7 | 3.7089 | 27.976 | -66.827 | -38.851 | -13.00 |
| | | 823.3 | 3.7039 | 27.976 | -67.064 | -39.088 | |
| | 3 | 815.5 | 3.6880 | 27.976 | -67.087 | -39.111 | |
| | | 822.5 | 3.7044 | 27.976 | -66.976 | -39.000 | |
| | 5 | 816.5 | 3.6710 | 27.976 | -66.870 | -38.894 | |
| | | 821.5 | 3.6945 | 27.976 | -67.094 | -39.118 | |
| | 10 | 819.0 | 3.7015 | 27.976 | -66.836 | -38.860 | |
| | 15 | 821.5 | 3.7154 | 27.976 | -67.336 | -39.360 | |

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 85 ~ 92.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Ext. Attenuator + Power Splitter

| Frequency Range (GHz) | Factor [dB] |
|-----------------------|-------------|
| 0.03 – 1 | 25.270 |
| 1 – 5 | 27.976 |
| 5 – 10 | 28.591 |
| 10 – 15 | 29.116 |
| 15 – 20 | 29.489 |
| Above 20(26.5) | 30.131 |


8.6 CHANNEL EDGE

- Plots of the EUT's Band Edge are shown Page 65 ~ 84.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 814,700,000 Hz
- ▣ CHANNEL: 26697(1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm |
|----------------|-------------|------------|----------------|----------------------|---------------|-----------|
| 100 % | 4.200 | +20(Ref) | 814 699 993 | 0.0 | 0.000 000 | 0.000 |
| 100 % | | -30 | 814 699 986 | -6.5 | -0.000 001 | -0.008 |
| 100 % | | -20 | 814 700 000 | 7.0 | 0.000 001 | 0.009 |
| 100 % | | -10 | 814 699 987 | -6.3 | -0.000 001 | -0.008 |
| 100 % | | 0 | 814 699 998 | 4.7 | 0.000 001 | 0.006 |
| 100 % | | +10 | 814 699 995 | 2.2 | 0.000 000 | 0.003 |
| 100 % | | +30 | 814 699 990 | -3.3 | 0.000 000 | -0.004 |
| 100 % | | +40 | 814 699 988 | -4.7 | -0.000 001 | -0.006 |
| 100 % | | +50 | 814 699 989 | -3.5 | 0.000 000 | -0.004 |
| Batt. Endpoint | | 3.650 | +20 | 814 699 990 | -3.0 | 0.000 000 |

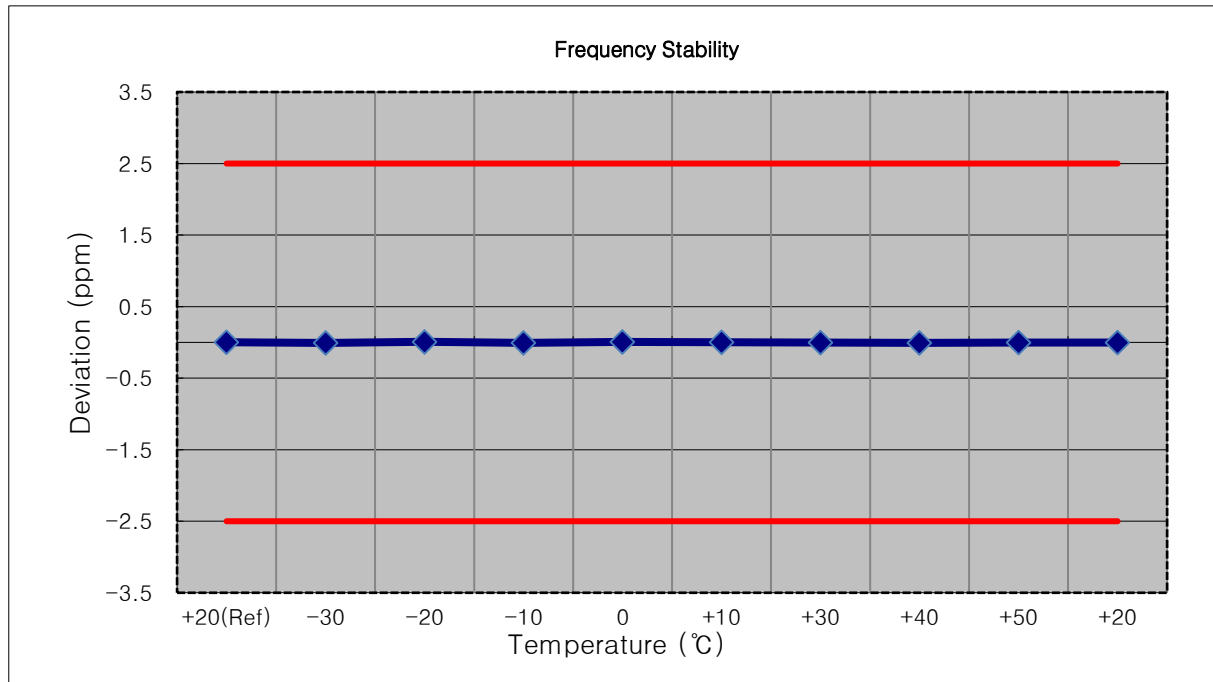


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 815,500,000 Hz
- ▣ CHANNEL: 26705(3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm |
|----------------|-------------|------------|----------------|----------------------|---------------|------------|
| 100 % | 4.200 | +20(Ref) | 815 499 989 | 0.0 | 0.000 000 | 0.000 |
| 100 % | | -30 | 815 499 980 | -9.1 | -0.000 001 | -0.011 |
| 100 % | | -20 | 815 499 982 | -7.1 | -0.000 001 | -0.009 |
| 100 % | | -10 | 815 499 983 | -6.9 | -0.000 001 | -0.008 |
| 100 % | | 0 | 815 499 994 | 4.8 | 0.000 001 | 0.006 |
| 100 % | | +10 | 815 499 975 | -14.6 | -0.000 002 | -0.018 |
| 100 % | | +30 | 815 499 975 | -14.8 | -0.000 002 | -0.018 |
| 100 % | | +40 | 815 499 973 | -16.1 | -0.000 002 | -0.020 |
| 100 % | | +50 | 815 500 004 | 14.8 | 0.000 002 | 0.018 |
| Batt. Endpoint | | 3.650 | +20 | 815 499 977 | -12.3 | -0.000 002 |

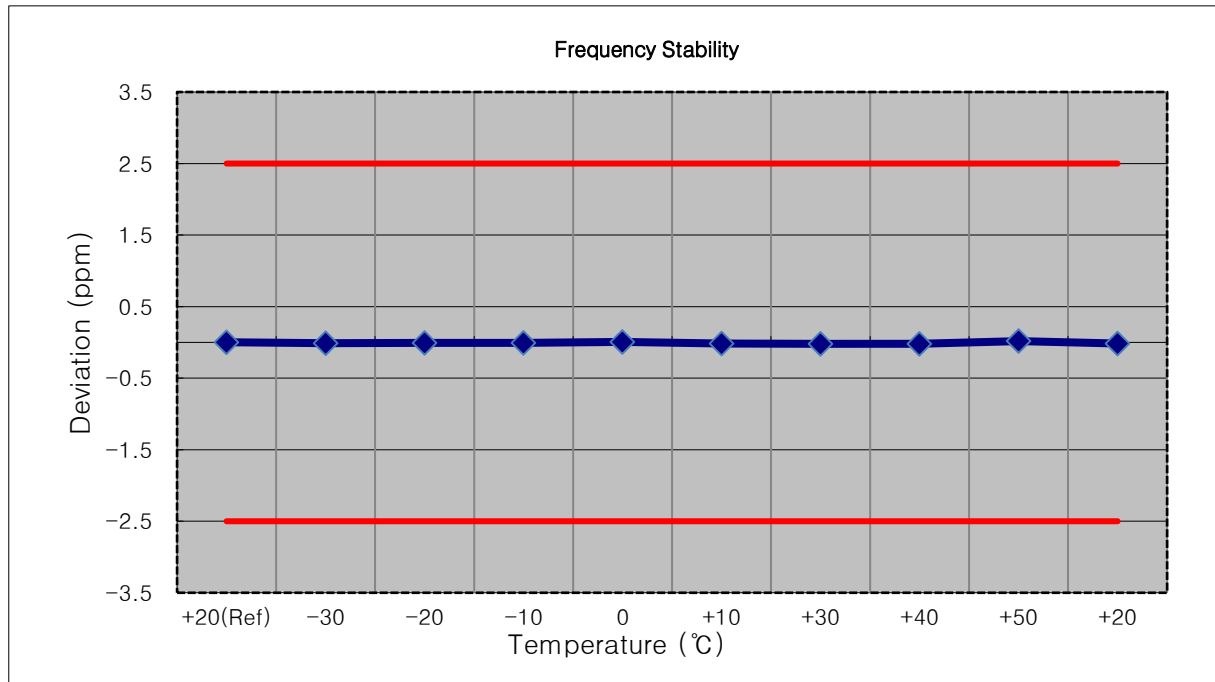


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 816,500,000 Hz
- ▣ CHANNEL: 26715(5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm |
|----------------|-------------|------------|----------------|----------------------|---------------|------------|
| 100 % | 4.200 | +20(Ref) | 816 499 997 | 0.0 | 0.000 000 | 0.000 |
| 100 % | | -30 | 816 499 994 | -3.6 | 0.000 000 | -0.004 |
| 100 % | | -20 | 816 499 995 | -2.7 | 0.000 000 | -0.003 |
| 100 % | | -10 | 816 499 999 | 1.8 | 0.000 000 | 0.002 |
| 100 % | | 0 | 816 500 001 | 3.9 | 0.000 000 | 0.005 |
| 100 % | | +10 | 816 499 988 | -8.9 | -0.000 001 | -0.011 |
| 100 % | | +30 | 816 499 989 | -8.2 | -0.000 001 | -0.010 |
| 100 % | | +40 | 816 499 989 | -8.0 | -0.000 001 | -0.010 |
| 100 % | | +50 | 816 499 991 | -6.5 | -0.000 001 | -0.008 |
| Batt. Endpoint | | 3.650 | +20 | 816 499 992 | -5.3 | -0.000 001 |

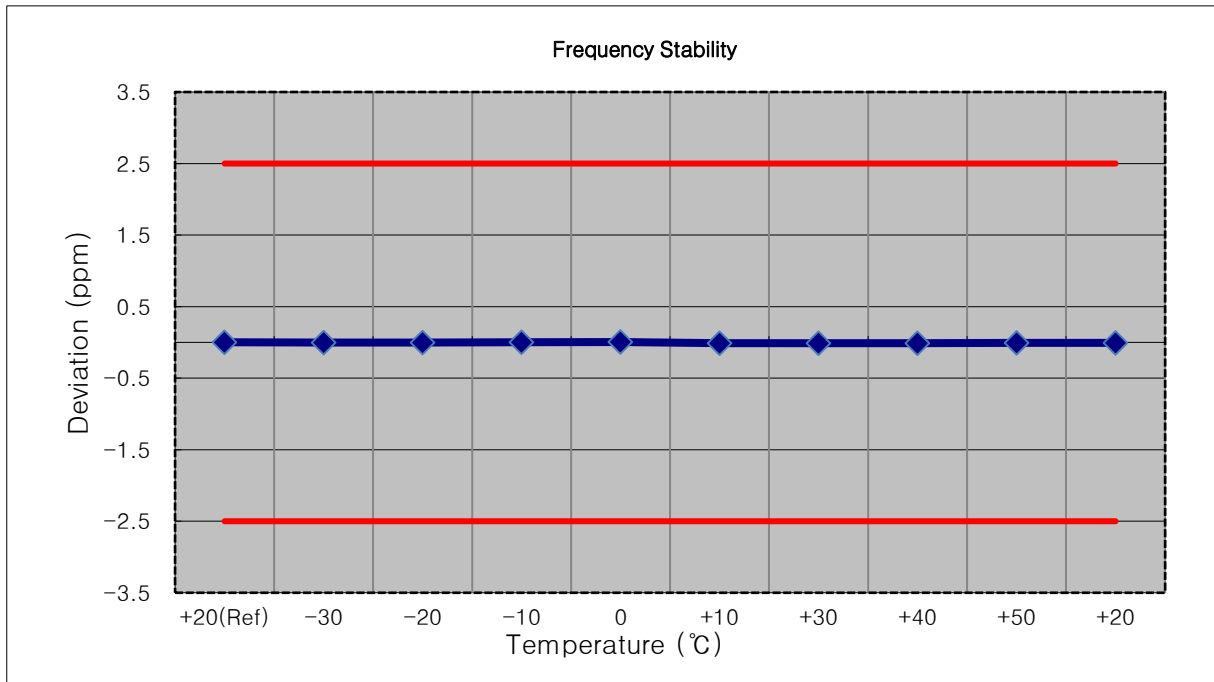


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 819,000,000 Hz
- ▣ CHANNEL: 26740(10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm |
|----------------|-------------|------------|----------------|----------------------|---------------|------------|
| 100 % | 4.200 | +20(Ref) | 818 999 989 | 0.0 | 0.000 000 | 0.000 |
| 100 % | | -30 | 818 999 980 | -9.5 | -0.000 001 | -0.012 |
| 100 % | | -20 | 818 999 978 | -10.9 | -0.000 001 | -0.013 |
| 100 % | | -10 | 818 999 980 | -9.2 | -0.000 001 | -0.011 |
| 100 % | | 0 | 818 999 983 | -6.7 | -0.000 001 | -0.008 |
| 100 % | | +10 | 818 999 983 | -6.4 | -0.000 001 | -0.008 |
| 100 % | | +30 | 818 999 984 | -5.0 | -0.000 001 | -0.006 |
| 100 % | | +40 | 818 999 985 | -4.6 | -0.000 001 | -0.006 |
| 100 % | | +50 | 818 999 976 | -13.1 | -0.000 002 | -0.016 |
| Batt. Endpoint | | 3.650 | +20 | 818 999 984 | -5.2 | -0.000 001 |

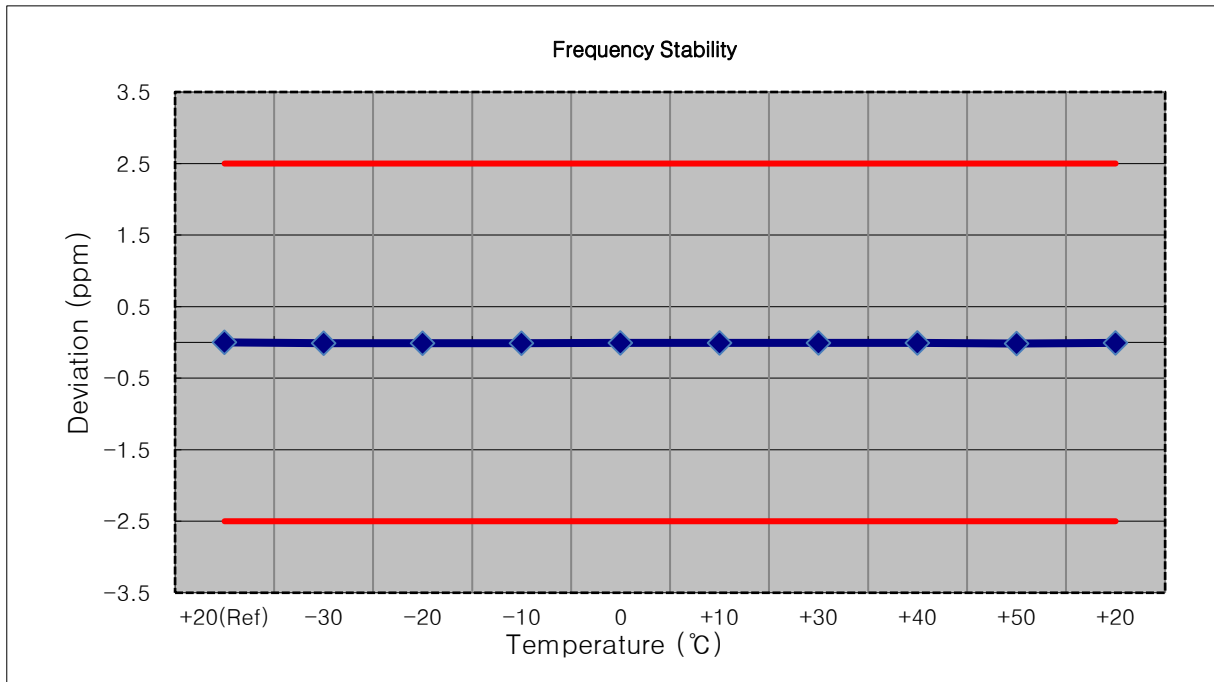

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 821,500,000 Hz
- ▣ CHANNEL: 26765(15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

| Voltage (%) | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm |
|----------------|-------------|------------|----------------|----------------------|---------------|------------|
| 100 % | 4.200 | +20(Ref) | 821 499 993 | 0.0 | 0.000 000 | 0.000 |
| 100 % | | -30 | 821 499 987 | -6.0 | -0.000 001 | -0.007 |
| 100 % | | -20 | 821 499 985 | -7.5 | -0.000 001 | -0.009 |
| 100 % | | -10 | 821 499 987 | -6.4 | -0.000 001 | -0.008 |
| 100 % | | 0 | 821 499 987 | -5.5 | -0.000 001 | -0.007 |
| 100 % | | +10 | 821 499 989 | -3.6 | 0.000 000 | -0.004 |
| 100 % | | +30 | 821 499 989 | -3.8 | 0.000 000 | -0.005 |
| 100 % | | +40 | 821 499 988 | -4.6 | -0.000 001 | -0.006 |
| 100 % | | +50 | 821 499 989 | -3.7 | 0.000 000 | -0.005 |
| Batt. Endpoint | | 3.650 | +20 | 821 499 983 | -9.5 | -0.000 001 |

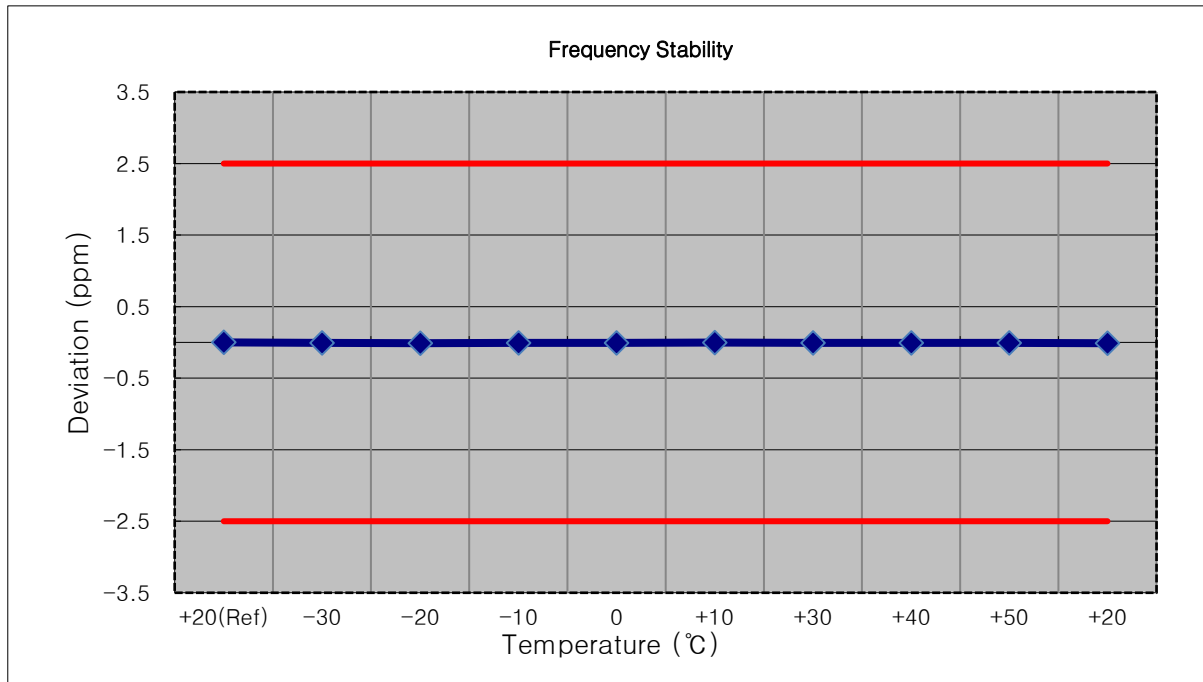

8.8 STADDLE CHANNEL

8.8.1 CONDUCTED OUTPUT POWER

| Band Width | Modulation | RB Size | RB Offset | Max. output power(dBm) | | Limit (W) |
|------------|------------|---------|-----------|------------------------|-------|-----------|
| | | | | 824 MHz | | |
| | | | | dBm | W | |
| 1.4 | QPSK | 1 | 0 | 23.38 | 0.218 | 100 |
| | | 1 | 3 | 23.51 | 0.224 | 100 |
| | | 1 | 5 | 23.37 | 0.217 | 100 |
| | | 3 | 0 | 23.44 | 0.221 | 100 |
| | | 3 | 1 | 23.47 | 0.222 | 100 |
| | | 3 | 3 | 23.46 | 0.222 | 100 |
| | | 6 | 0 | 22.58 | 0.181 | 100 |
| | 16QAM | 1 | 0 | 22.58 | 0.181 | 100 |
| | | 1 | 3 | 22.85 | 0.193 | 100 |
| | | 1 | 5 | 22.80 | 0.191 | 100 |
| | | 3 | 0 | 22.80 | 0.191 | 100 |
| | | 3 | 1 | 22.64 | 0.184 | 100 |
| | | 3 | 3 | 22.60 | 0.182 | 100 |
| | | 6 | 0 | 21.64 | 0.146 | 100 |
| | 64QAM | 1 | 0 | 21.62 | 0.145 | 100 |
| | | 1 | 3 | 21.68 | 0.147 | 100 |
| | | 1 | 5 | 21.70 | 0.148 | 100 |
| | | 3 | 0 | 21.61 | 0.145 | 100 |
| | | 3 | 1 | 21.68 | 0.147 | 100 |
| | | 3 | 3 | 21.69 | 0.148 | 100 |
| | | 6 | 0 | 20.60 | 0.115 | 100 |
| | 256QAM | 1 | 0 | 18.63 | 0.073 | 100 |
| | | 1 | 3 | 18.60 | 0.072 | 100 |
| | | 1 | 5 | 18.62 | 0.073 | 100 |
| | | 3 | 0 | 18.63 | 0.073 | 100 |
| | | 3 | 1 | 18.68 | 0.074 | 100 |
| | | 3 | 3 | 18.70 | 0.074 | 100 |
| | | 6 | 0 | 18.55 | 0.072 | 100 |

| Band Width | Modulation | RB Size | RB Offset | Max. output power(dBm) | | Limit (W) |
|------------|------------|---------|-----------|------------------------|-------|-----------|
| | | | | 824 MHz | | |
| | | | | dBm | W | |
| 3 | QPSK | 1 | 0 | 23.49 | 0.223 | 100 |
| | | 1 | 7 | 23.38 | 0.218 | 100 |
| | | 1 | 14 | 23.48 | 0.223 | 100 |
| | | 8 | 0 | 22.68 | 0.185 | 100 |
| | | 8 | 3 | 22.60 | 0.182 | 100 |
| | | 8 | 7 | 22.58 | 0.181 | 100 |
| | | 15 | 0 | 22.63 | 0.183 | 100 |
| | 16QAM | 1 | 0 | 22.95 | 0.197 | 100 |
| | | 1 | 7 | 22.83 | 0.192 | 100 |
| | | 1 | 14 | 22.87 | 0.194 | 100 |
| | | 8 | 0 | 21.70 | 0.148 | 100 |
| | | 8 | 3 | 21.78 | 0.151 | 100 |
| | | 8 | 7 | 21.72 | 0.149 | 100 |
| | | 15 | 0 | 21.65 | 0.146 | 100 |
| | 64QAM | 1 | 0 | 22.04 | 0.160 | 100 |
| | | 1 | 7 | 21.72 | 0.149 | 100 |
| | | 1 | 14 | 21.71 | 0.148 | 100 |
| | | 8 | 0 | 20.64 | 0.116 | 100 |
| | | 8 | 3 | 20.71 | 0.118 | 100 |
| | | 8 | 7 | 20.65 | 0.116 | 100 |
| | | 15 | 0 | 20.67 | 0.117 | 100 |
| | 256QAM | 1 | 0 | 18.72 | 0.074 | 100 |
| | | 1 | 7 | 18.78 | 0.076 | 100 |
| | | 1 | 14 | 18.70 | 0.074 | 100 |
| | | 8 | 0 | 18.64 | 0.073 | 100 |
| | | 8 | 3 | 18.72 | 0.074 | 100 |
| | | 8 | 7 | 18.69 | 0.074 | 100 |
| | | 15 | 0 | 18.67 | 0.074 | 100 |

| Band Width | Modulation | RB Size | RB Offset | Max. output power(dBm) | | Limit (W) |
|------------|------------|---------|-----------|------------------------|-------|-----------|
| | | | | 824 MHz | | |
| | | | | dBm | W | |
| 5 | QPSK | 1 | 0 | 23.39 | 0.218 | 100 |
| | | 1 | 12 | 23.40 | 0.219 | 100 |
| | | 1 | 24 | 23.46 | 0.222 | 100 |
| | | 12 | 0 | 22.58 | 0.181 | 100 |
| | | 12 | 6 | 22.67 | 0.185 | 100 |
| | | 12 | 11 | 22.65 | 0.184 | 100 |
| | | 25 | 0 | 22.60 | 0.182 | 100 |
| | 16QAM | 1 | 0 | 22.67 | 0.185 | 100 |
| | | 1 | 12 | 22.88 | 0.194 | 100 |
| | | 1 | 24 | 22.78 | 0.190 | 100 |
| | | 12 | 0 | 21.65 | 0.146 | 100 |
| | | 12 | 6 | 21.73 | 0.149 | 100 |
| | | 12 | 11 | 21.70 | 0.148 | 100 |
| | | 25 | 0 | 21.63 | 0.146 | 100 |
| | 64QAM | 1 | 0 | 21.88 | 0.154 | 100 |
| | | 1 | 12 | 21.77 | 0.150 | 100 |
| | | 1 | 24 | 21.74 | 0.149 | 100 |
| | | 12 | 0 | 20.62 | 0.115 | 100 |
| | | 12 | 6 | 20.71 | 0.118 | 100 |
| | | 12 | 11 | 20.69 | 0.117 | 100 |
| | | 25 | 0 | 20.62 | 0.115 | 100 |
| | 256QAM | 1 | 0 | 18.61 | 0.073 | 100 |
| | | 1 | 12 | 18.60 | 0.072 | 100 |
| | | 1 | 24 | 18.70 | 0.074 | 100 |
| | | 12 | 0 | 18.51 | 0.071 | 100 |
| | | 12 | 6 | 18.64 | 0.073 | 100 |
| | | 12 | 11 | 18.65 | 0.073 | 100 |
| | | 25 | 0 | 18.57 | 0.072 | 100 |

| Band Width | Modulation | RB Size | RB Offset | Max. output power(dBm) | | Limit (W) |
|------------|------------|---------|-----------|------------------------|-------|-----------|
| | | | | 824 MHz | | |
| | | | | dBm | W | |
| 10 | QPSK | 1 | 0 | 23.57 | 0.228 | 100 |
| | | 1 | 24 | 23.41 | 0.219 | 100 |
| | | 1 | 49 | 23.40 | 0.219 | 100 |
| | | 25 | 0 | 22.50 | 0.178 | 100 |
| | | 25 | 12 | 22.66 | 0.185 | 100 |
| | | 25 | 24 | 22.65 | 0.184 | 100 |
| | | 50 | 0 | 22.62 | 0.183 | 100 |
| | 16QAM | 1 | 0 | 23.00 | 0.200 | 100 |
| | | 1 | 24 | 23.21 | 0.209 | 100 |
| | | 1 | 49 | 23.31 | 0.214 | 100 |
| | | 25 | 0 | 21.50 | 0.141 | 100 |
| | | 25 | 12 | 21.67 | 0.147 | 100 |
| | | 25 | 24 | 21.67 | 0.147 | 100 |
| | | 50 | 0 | 21.65 | 0.146 | 100 |
| | 64QAM | 1 | 0 | 21.90 | 0.155 | 100 |
| | | 1 | 24 | 21.75 | 0.150 | 100 |
| | | 1 | 49 | 21.87 | 0.154 | 100 |
| | | 25 | 0 | 20.54 | 0.113 | 100 |
| | | 25 | 12 | 20.83 | 0.121 | 100 |
| | | 25 | 24 | 20.58 | 0.114 | 100 |
| | | 50 | 0 | 20.65 | 0.116 | 100 |
| | 256QAM | 1 | 0 | 18.33 | 0.068 | 100 |
| | | 1 | 24 | 18.75 | 0.075 | 100 |
| | | 1 | 49 | 18.53 | 0.071 | 100 |
| | | 25 | 0 | 18.44 | 0.070 | 100 |
| | | 25 | 12 | 18.70 | 0.074 | 100 |
| | | 25 | 24 | 18.57 | 0.072 | 100 |
| | | 50 | 0 | 18.58 | 0.072 | 100 |

8.8.2 EFFECTIVE RADIATED POWER

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit W | ERP | |
|------------|---------------------|------------|----------------------|------------------------|-----------------|------|-----|---------|-------|-------|
| | | | | | | | | | W | dBm |
| 824.0 | LTE B26/ 1.4 MHz | QPSK | -31.64 | 31.29 | -10.25 | 1.39 | V | < 7.00 | 0.092 | 19.65 |
| | | 16QAM | -32.31 | 30.62 | -10.25 | 1.39 | V | | 0.079 | 18.98 |
| | | 64QAM | -33.36 | 29.57 | -10.25 | 1.39 | V | | 0.062 | 17.93 |
| | | 256QAM | -36.40 | 26.53 | -10.25 | 1.39 | V | | 0.031 | 14.89 |

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit W | ERP | |
|------------|-------------------|------------|----------------------|------------------------|-----------------|------|-----|---------|-------|-------|
| | | | | | | | | | W | dBm |
| 824.0 | LTE B26/ 3 MHz | QPSK | -31.63 | 31.30 | -10.25 | 1.39 | V | < 7.00 | 0.092 | 19.66 |
| | | 16QAM | -32.19 | 30.74 | -10.25 | 1.39 | V | | 0.081 | 19.10 |
| | | 64QAM | -33.34 | 29.59 | -10.25 | 1.39 | V | | 0.062 | 17.95 |
| | | 256QAM | -36.47 | 26.46 | -10.25 | 1.39 | V | | 0.030 | 14.82 |

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit W | ERP | |
|------------|-------------------|------------|----------------------|------------------------|-----------------|------|-----|---------|-------|-------|
| | | | | | | | | | W | dBm |
| 824.0 | LTE B26/ 5 MHz | QPSK | -31.67 | 31.26 | -10.25 | 1.39 | V | < 7.00 | 0.092 | 19.62 |
| | | 16QAM | -32.19 | 30.74 | -10.25 | 1.39 | V | | 0.081 | 19.10 |
| | | 64QAM | -33.30 | 29.63 | -10.25 | 1.39 | V | | 0.063 | 17.99 |
| | | 256QAM | -36.55 | 26.38 | -10.25 | 1.39 | V | | 0.030 | 14.74 |

| Freq (MHz) | Bandwidth | Modulation | Measured Level (dBm) | Substitute Level (dBm) | Ant. Gain (dBd) | C.L | Pol | Limit W | ERP | |
|------------|--------------------|------------|----------------------|------------------------|-----------------|------|-----|---------|-------|-------|
| | | | | | | | | | W | dBm |
| 824.0 | LTE B26/ 10 MHz | QPSK | -31.52 | 31.41 | -10.25 | 1.39 | V | < 7.00 | 0.095 | 19.77 |
| | | 16QAM | -32.07 | 30.86 | -10.25 | 1.39 | V | | 0.084 | 19.22 |
| | | 64QAM | -33.25 | 29.68 | -10.25 | 1.39 | V | | 0.064 | 18.04 |
| | | 256QAM | -36.64 | 26.29 | -10.25 | 1.39 | V | | 0.029 | 14.65 |

8.8.3 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters

| Ch | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L | Pol | Result (dBm) | Limit |
|------------------|------------|----------------------|-----------------|------------------------|------|-----|--------------|--------|
| 26790 (824.0) | 1 648.00 | -52.35 | 9.70 | -62.67 | 1.99 | H | -54.96 | -13.00 |
| | 2 472.00 | -35.36 | 10.46 | -40.01 | 2.47 | V | -32.02 | -13.00 |
| | 3 296.00 | -57.72 | 12.07 | -59.21 | 2.89 | H | -50.02 | -13.00 |

8.8.4 CONDUCTED SPURIOUS EMISSIONS

| Band | Band Width (MHz) | Frequency (MHz) | Frequency of Maximum Harmonic (GHz) | Factor (dB) | Measurement Maximum Data (dBm) | Result (dBm) | Limit (dBm) |
|------|------------------|-----------------|-------------------------------------|-------------|--------------------------------|--------------|-------------|
| 26 | 1.4 | 824.0 | 3.6770 | 27.976 | -67.113 | -39.137 | -13.00 |
| | 3 | | 3.6830 | 27.976 | -67.135 | -39.159 | |
| | 5 | | 3.6865 | 27.976 | -67.081 | -39.105 | |
| | 10 | | 3.6855 | 27.976 | -66.909 | -38.933 | |

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 94 ~ 97.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

| Frequency Range (GHz) | Factor [dB] |
|-----------------------|-------------|
| 0.03 – 1 | 25.270 |
| 1 – 5 | 27.976 |
| 5 – 10 | 28.591 |
| 10 – 15 | 29.116 |
| 15 – 20 | 29.489 |
| Above 20(26.5) | 30.131 |

8.8.5 CHANNEL EDGE(Part90)

- Test Channel : 26790(824.0MHz)

Plots of the EUT's Band Edge are shown Page 98 ~ 109.


8.8.6 BAND EDGE(Part22)

- Test Channel : 26790(824.0 MHz)


- Plots of the EUT's Band Edge are shown Page 110 ~ 117.

9. TEST PLOTS


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 QPSK RB 6_0)

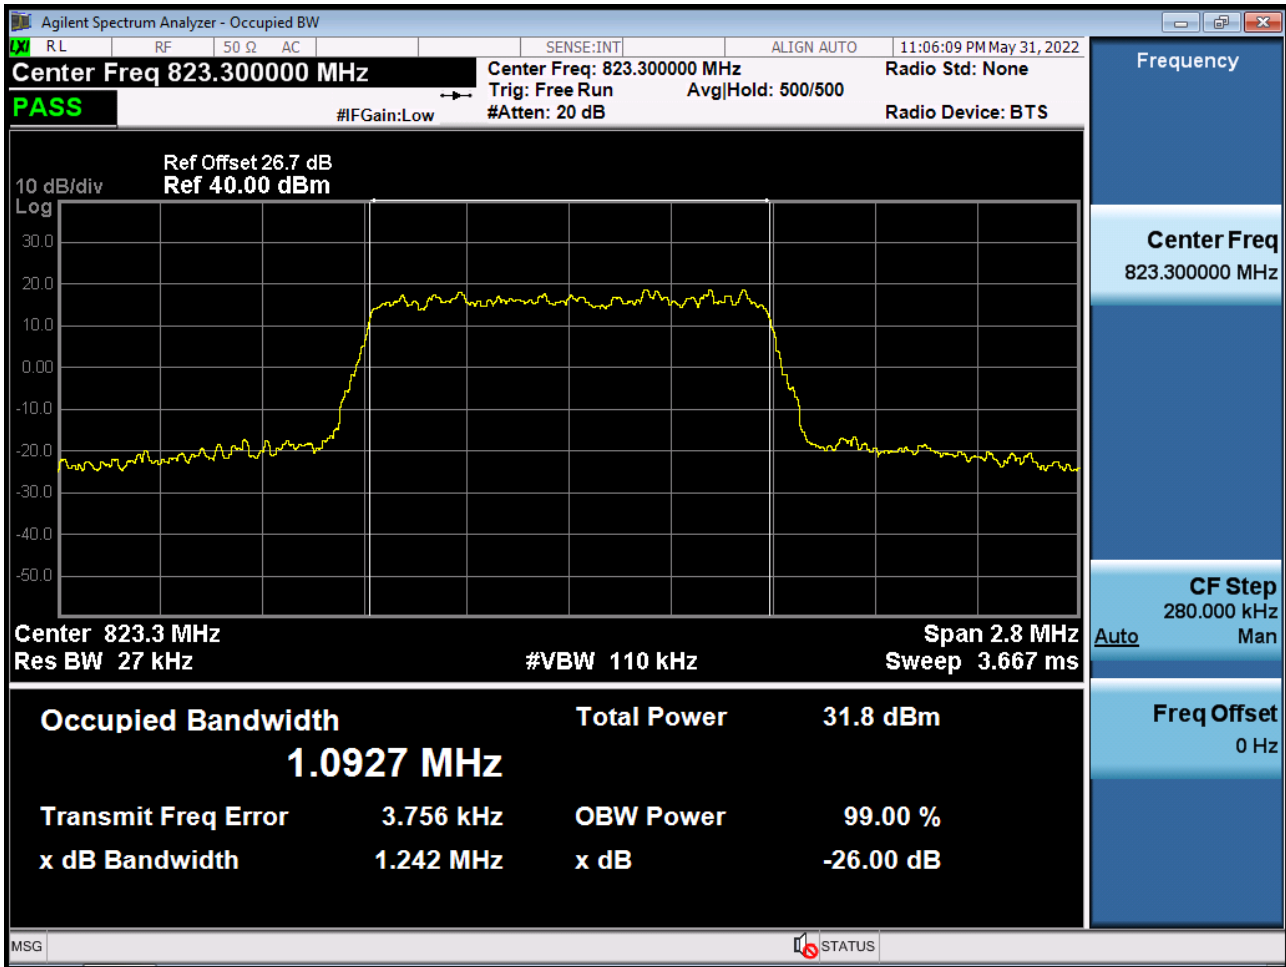


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 16QAM RB 6_0)

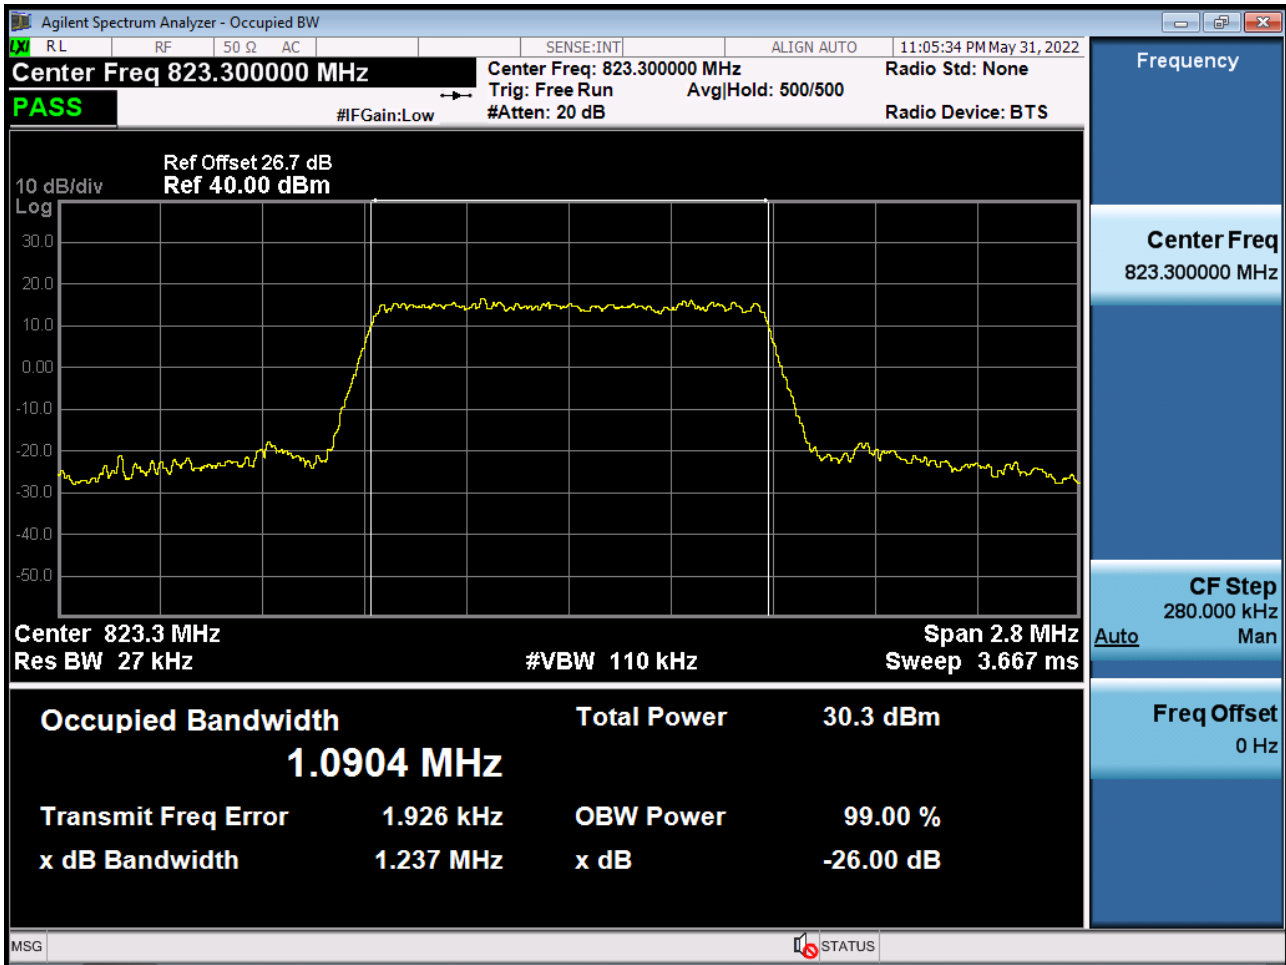


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 64QAM RB 6_0)

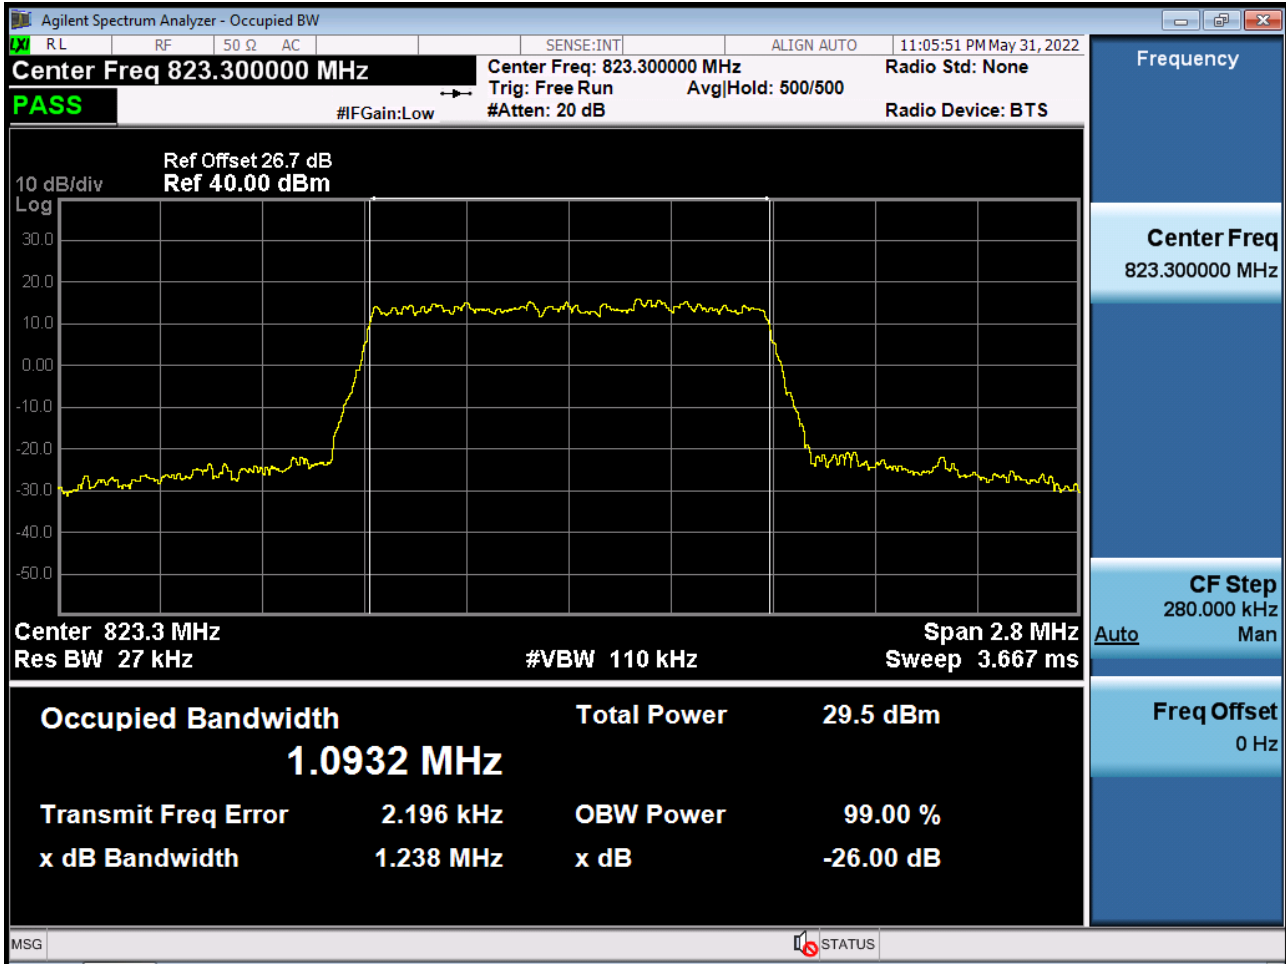


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 256QAM RB 6_0)

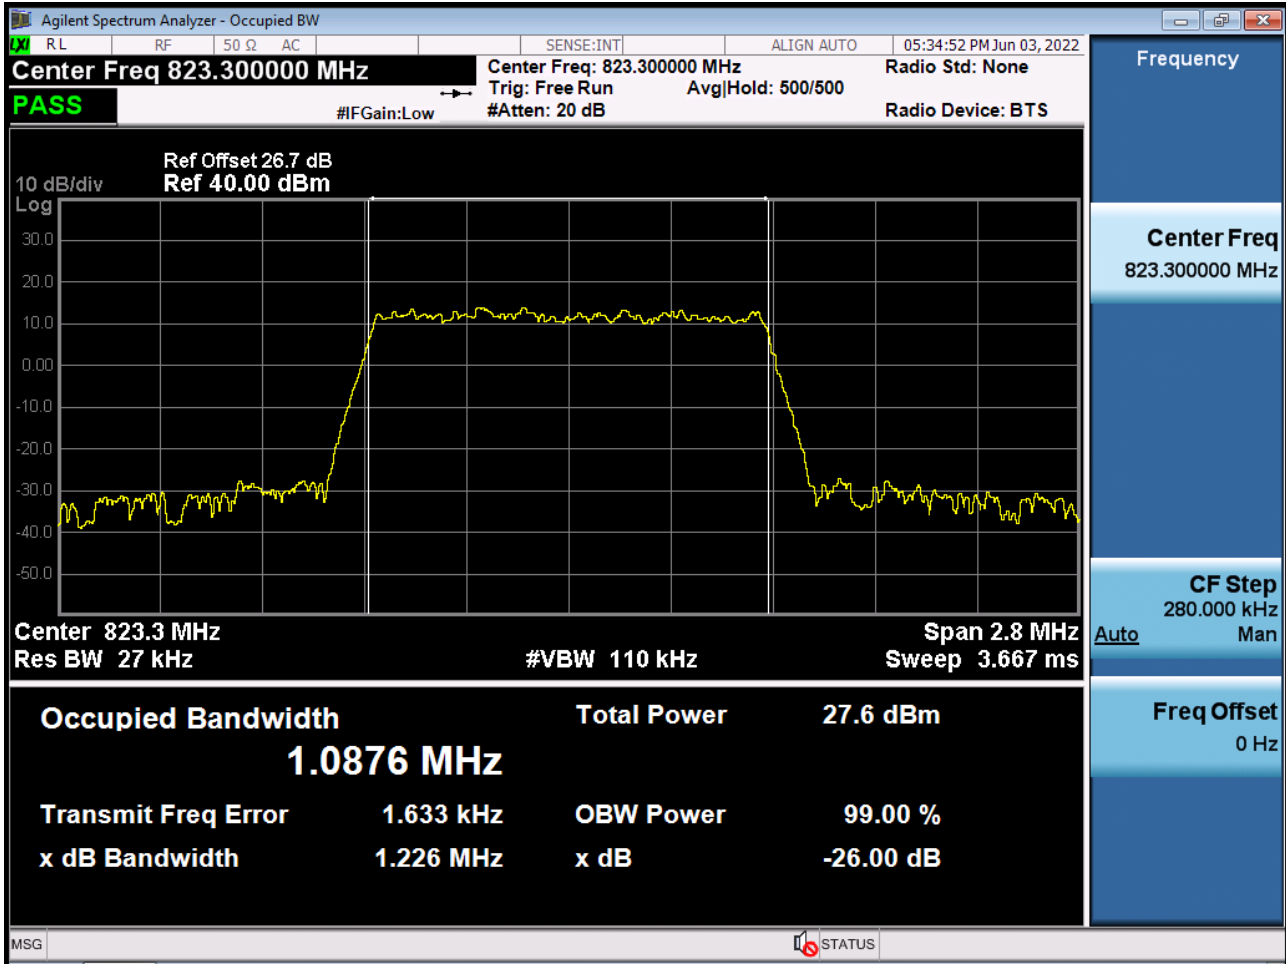


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 QPSK RB 15_0)

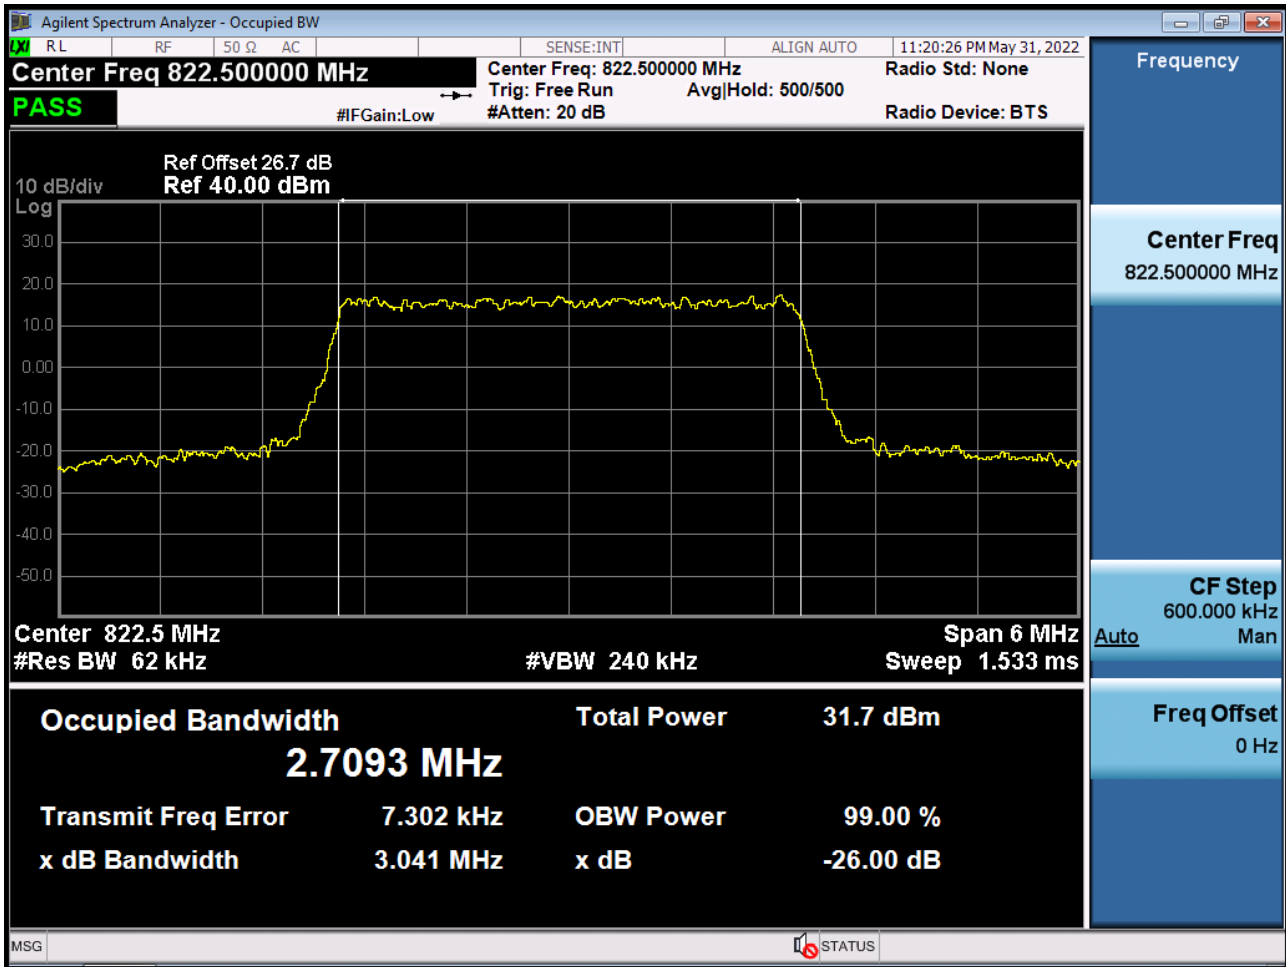


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 16QAM RB 15_0)

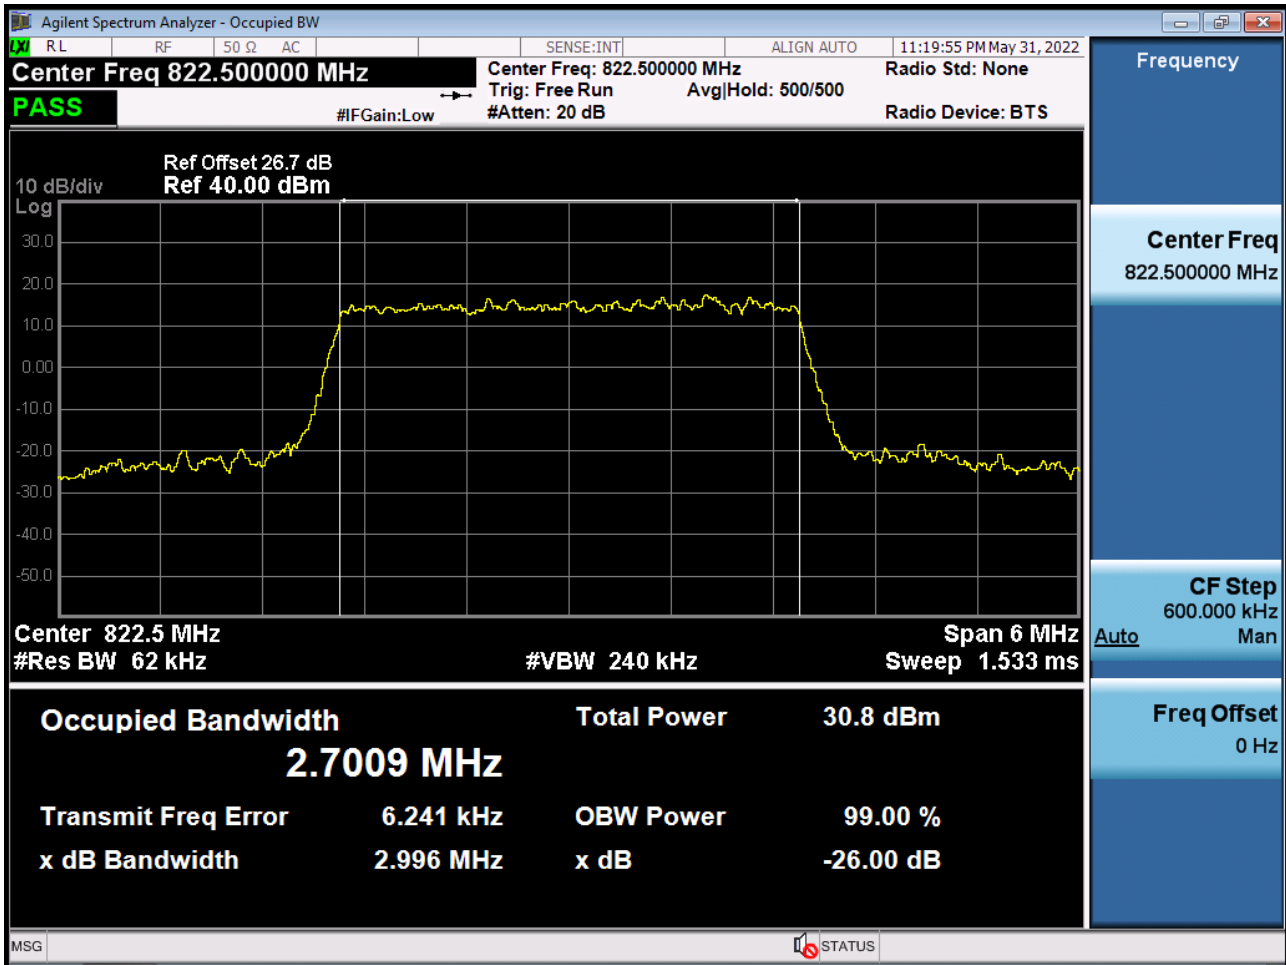


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 64QAM RB 15_0)

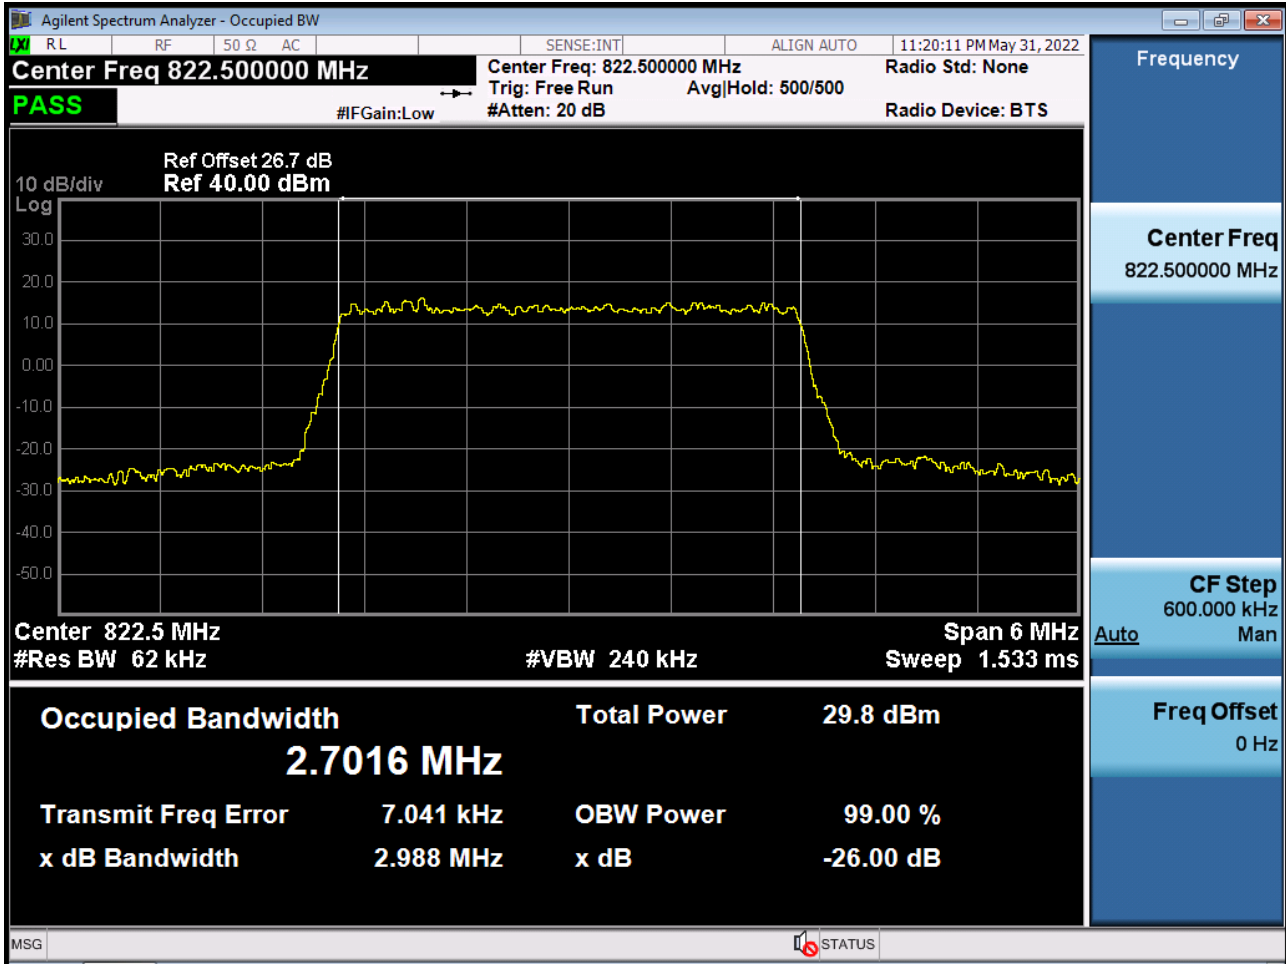


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 256QAM RB 15_0)

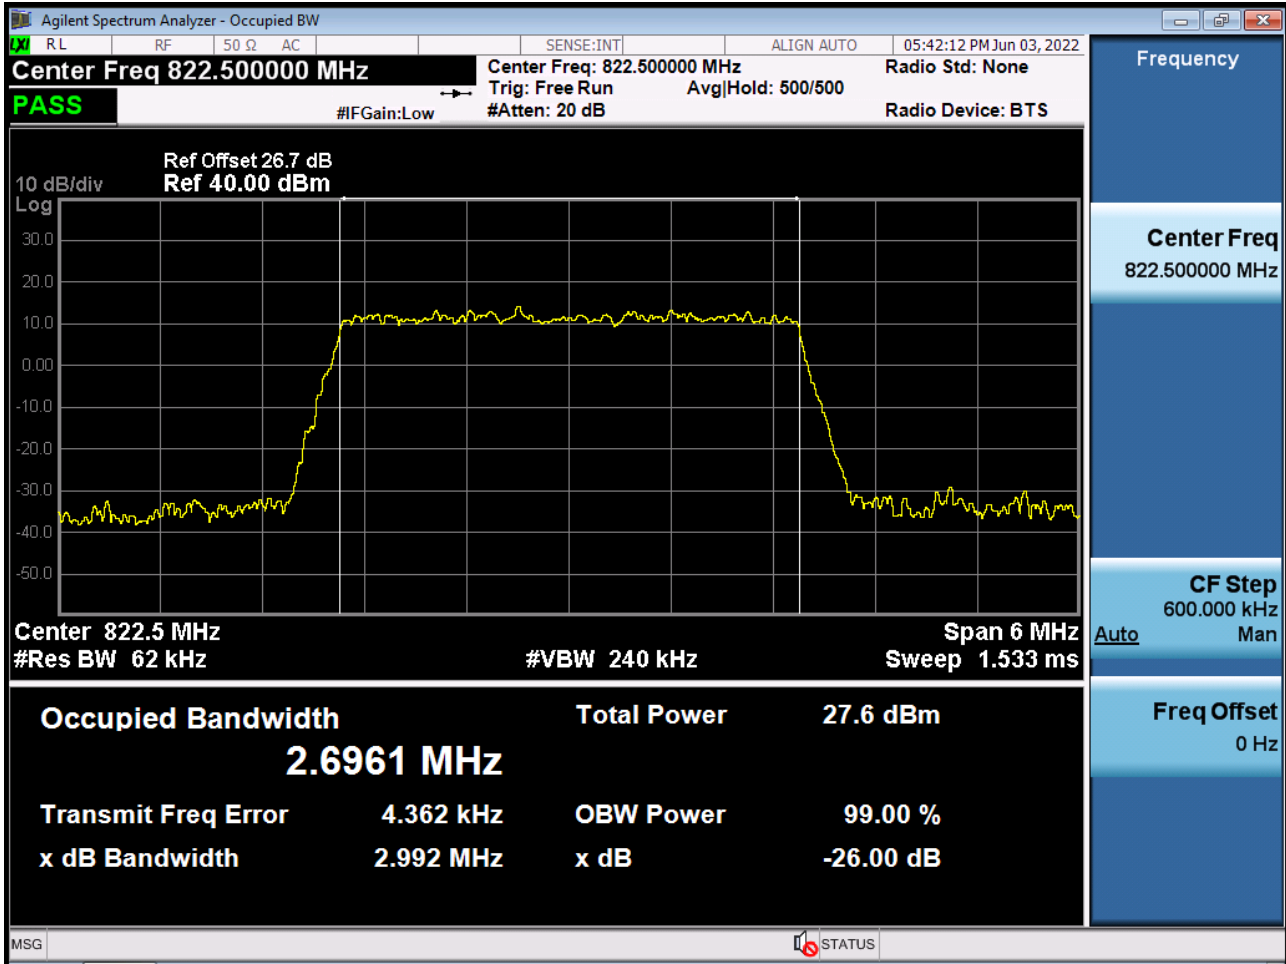


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 QPSK RB 25_0)

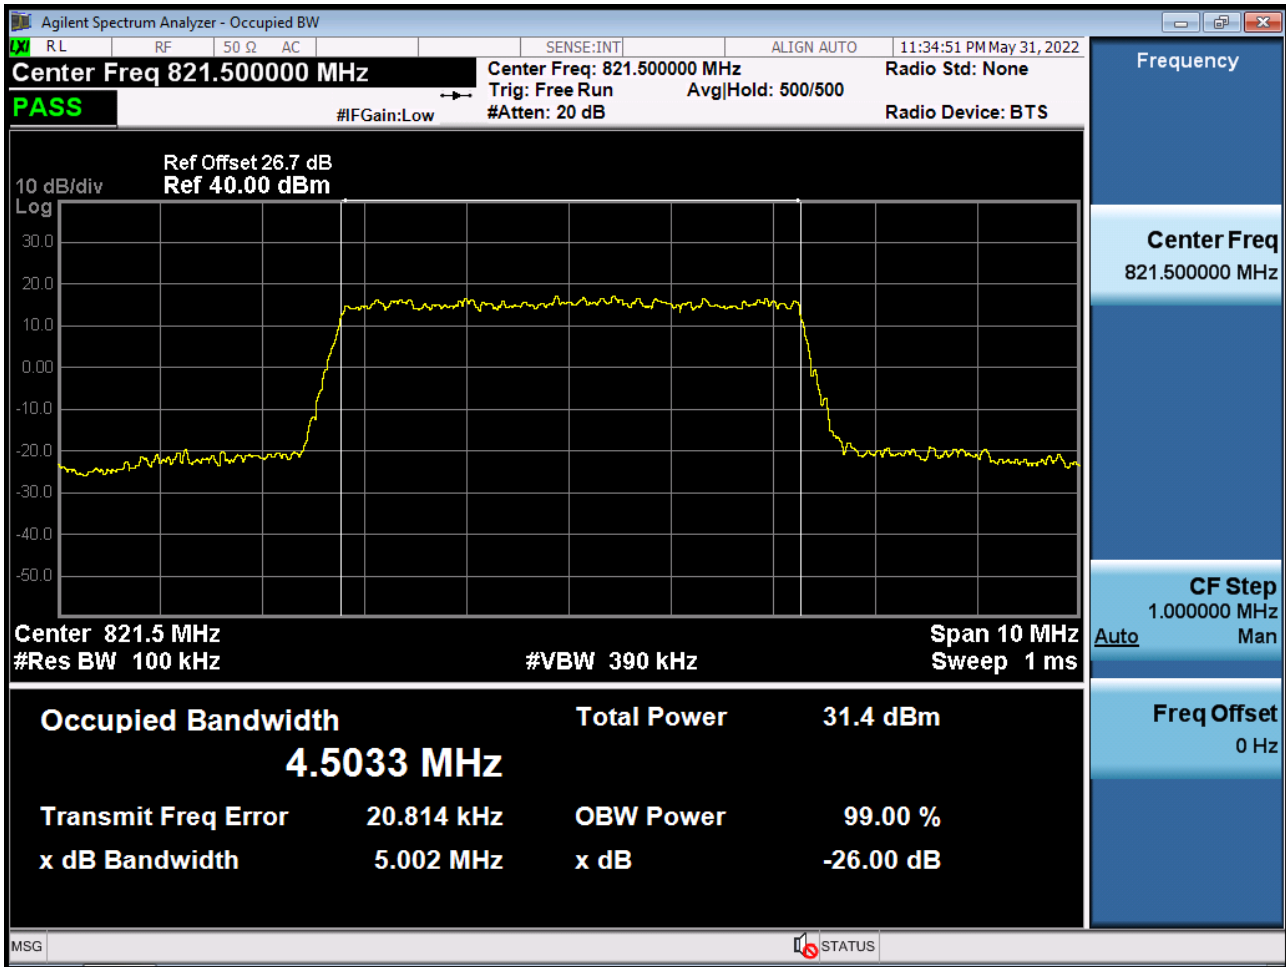


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 16QAM RB 25_0)

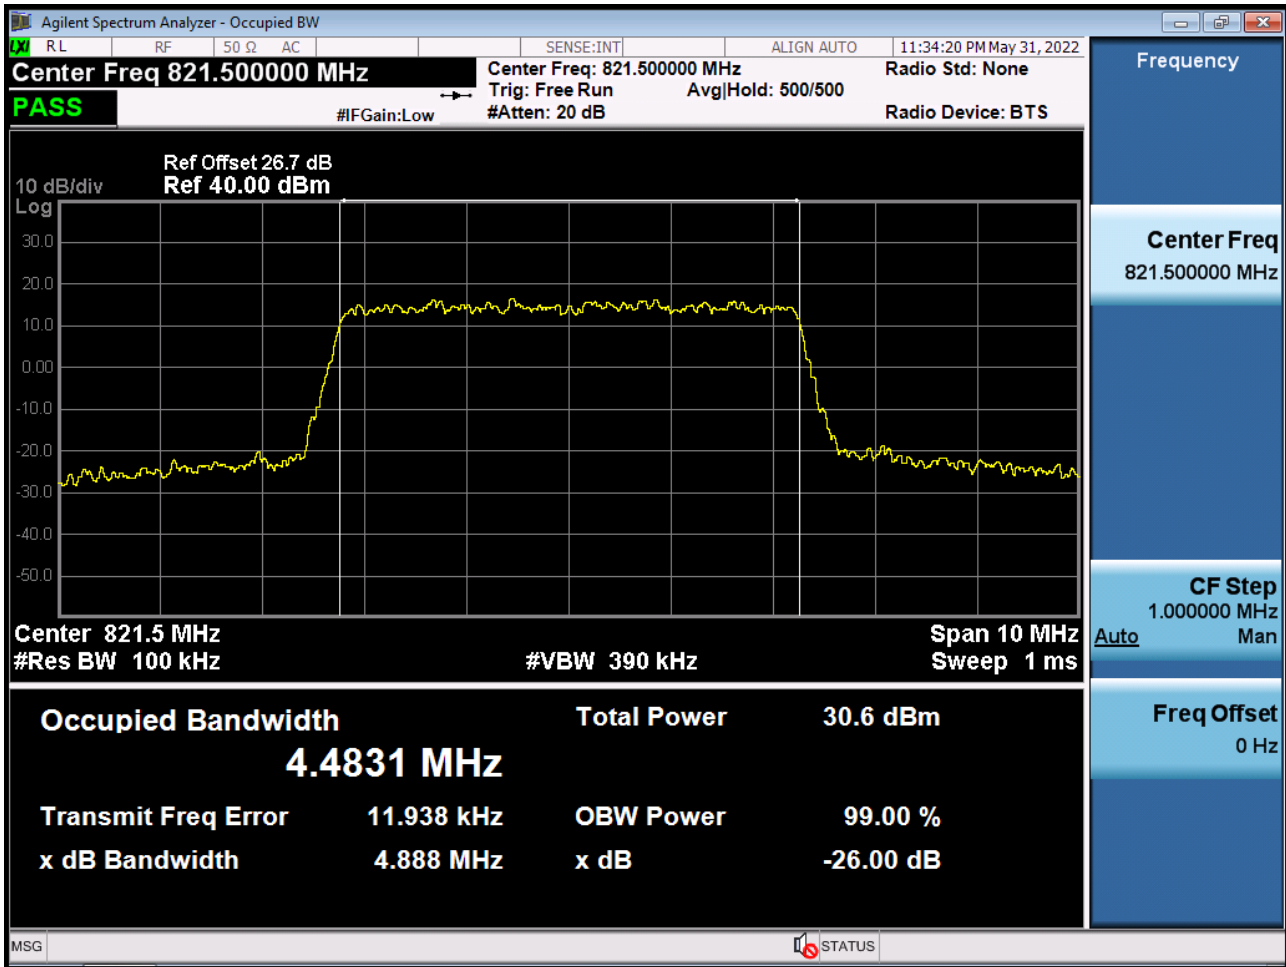


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 64QAM RB 25_0)

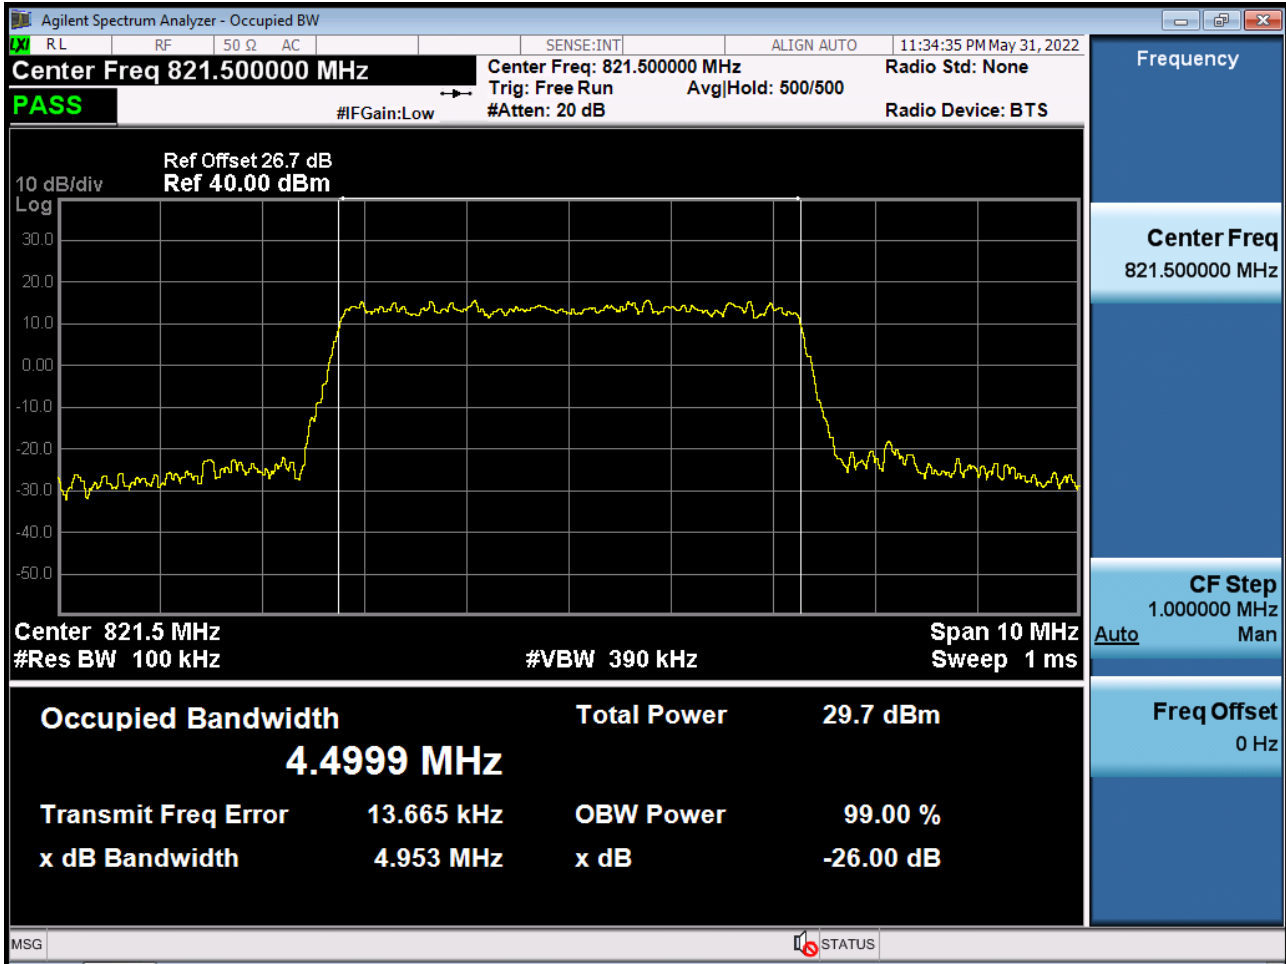


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 256QAM RB 25_0)

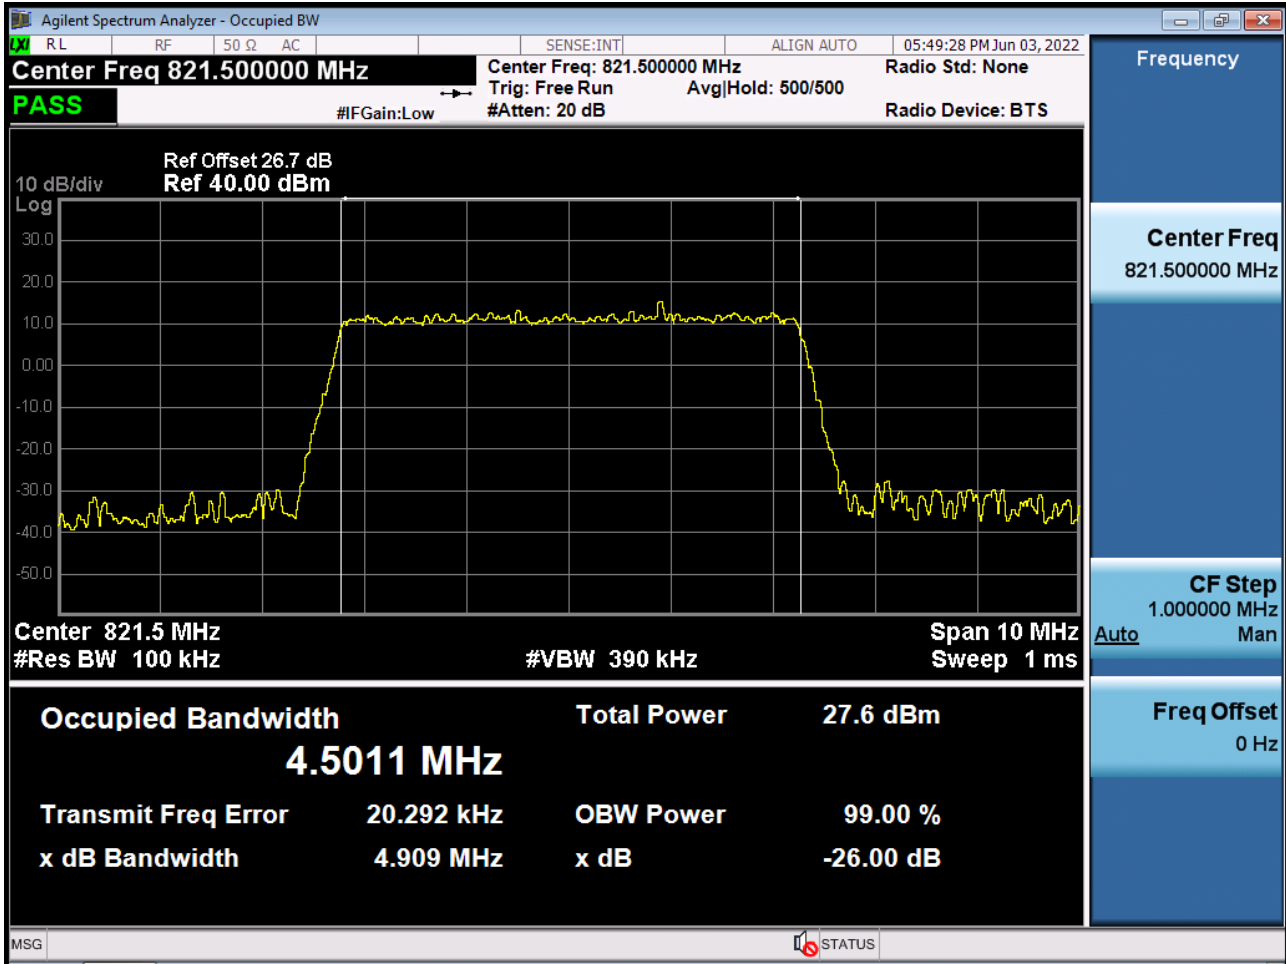


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 QPSK RB 50_0)

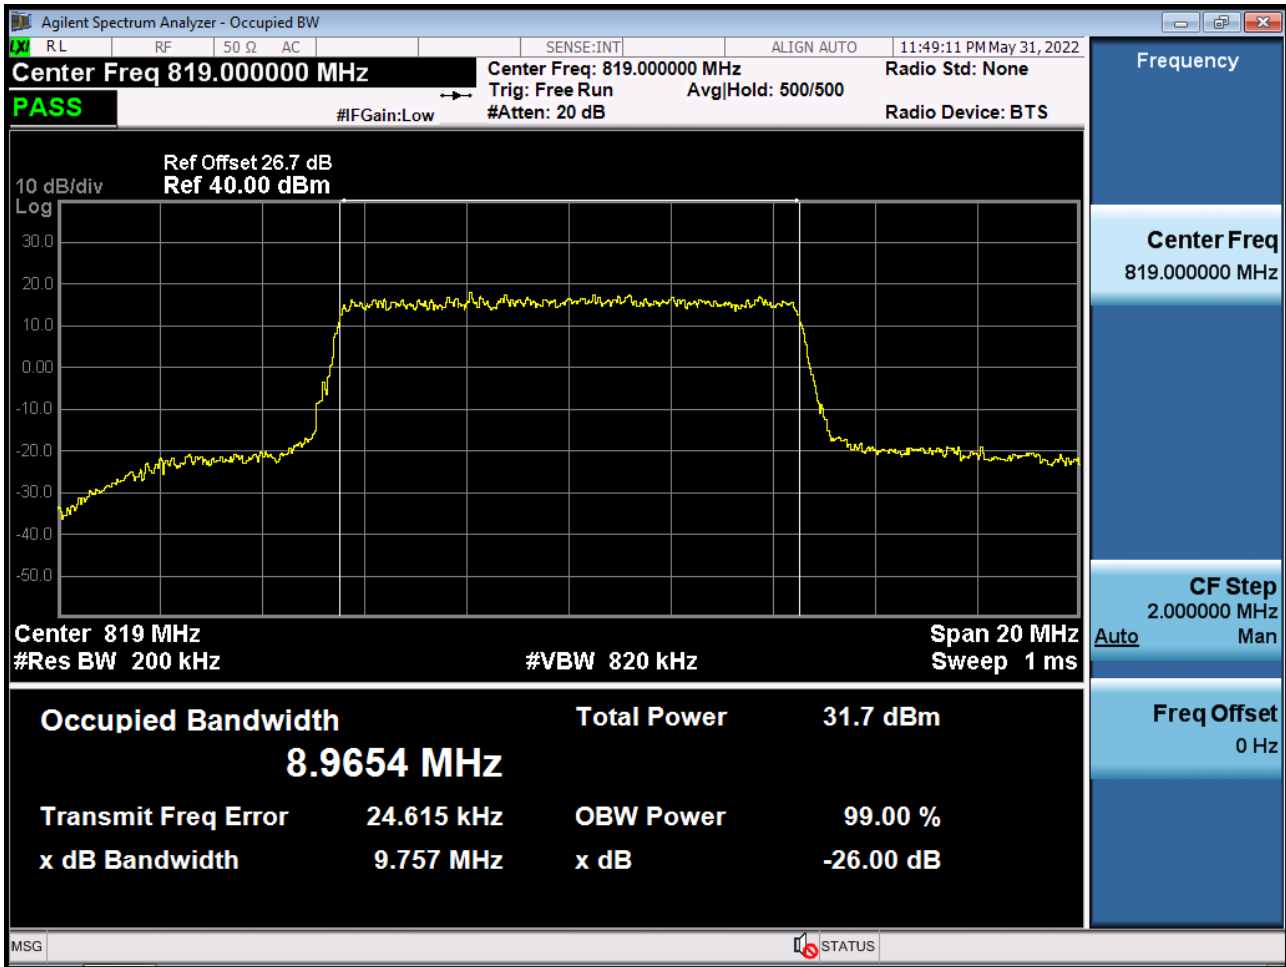


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 16QAM RB 50_0)

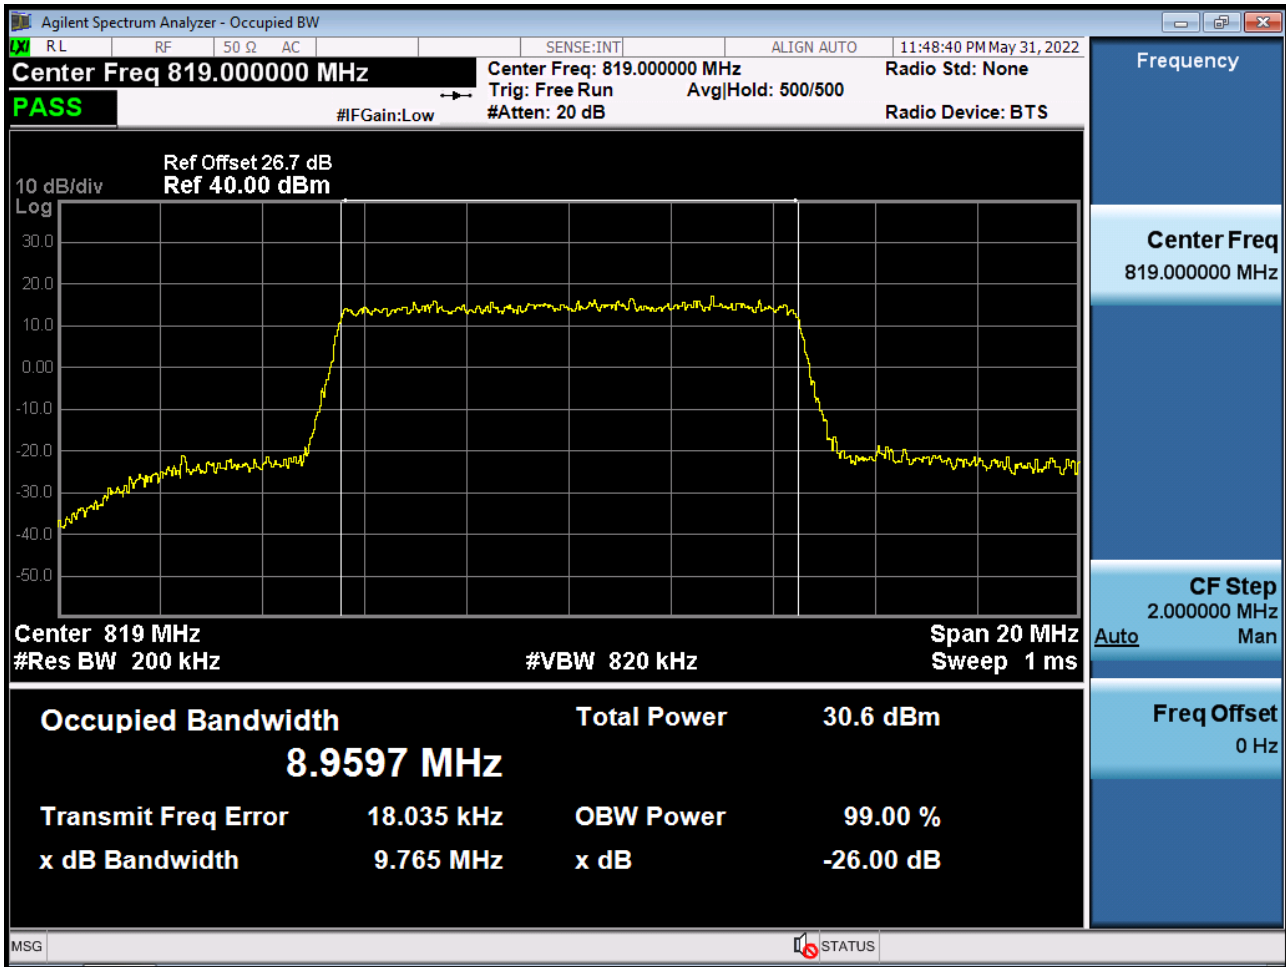


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 64QAM RB 50_0)

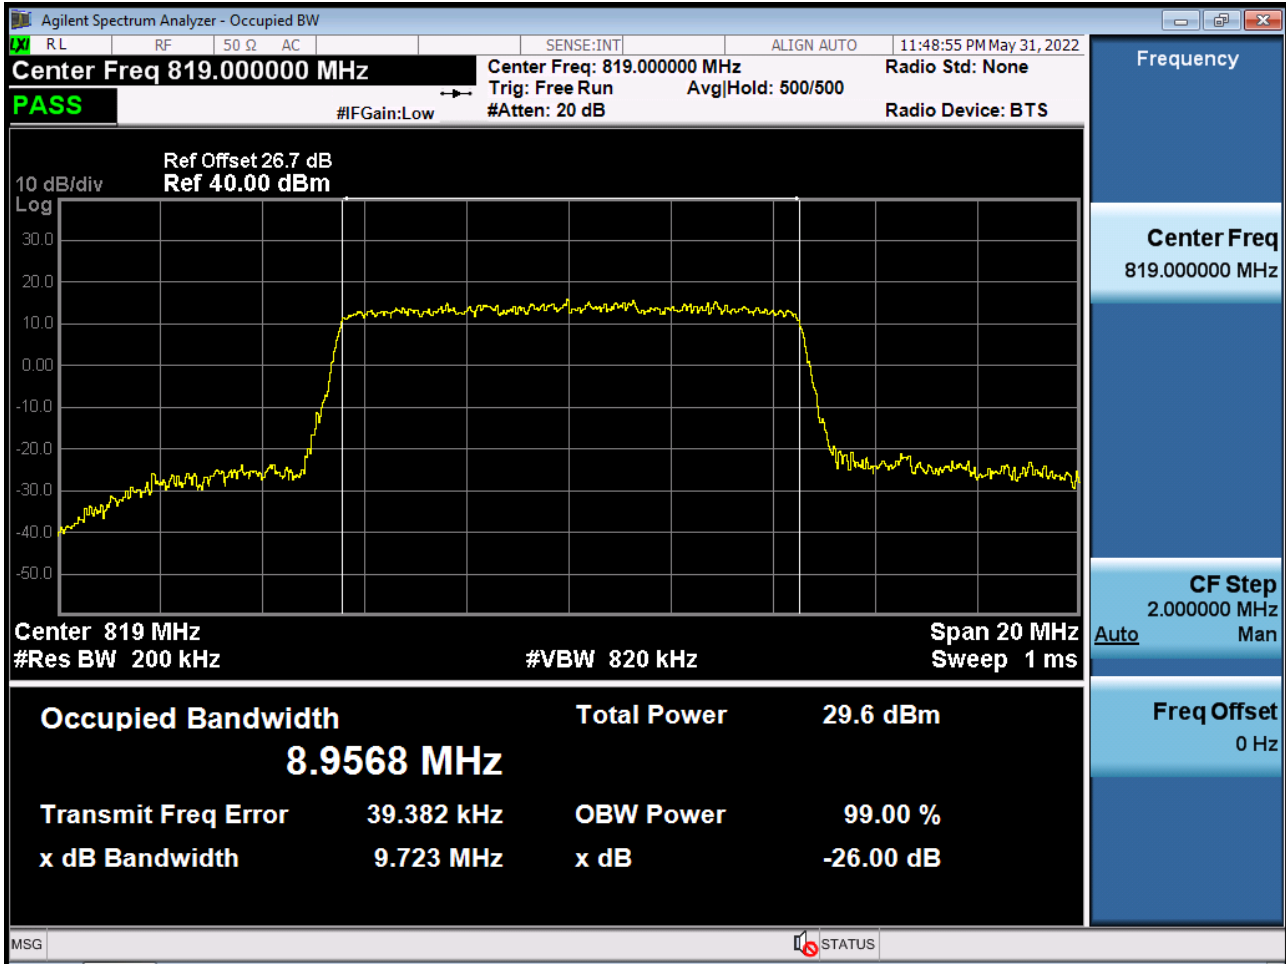


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 256QAM RB 50_0)

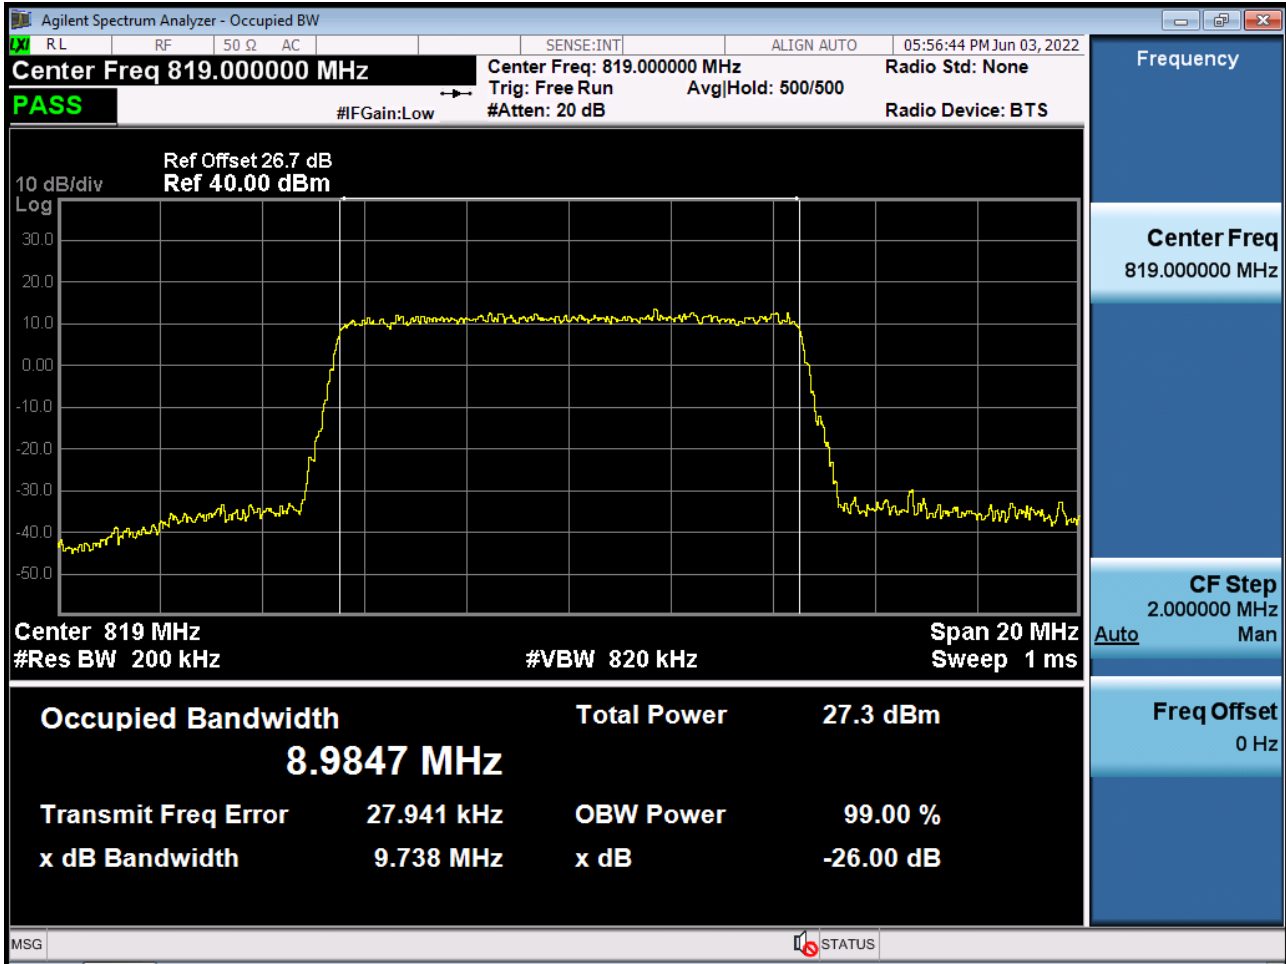


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 QPSK RB 75_0)

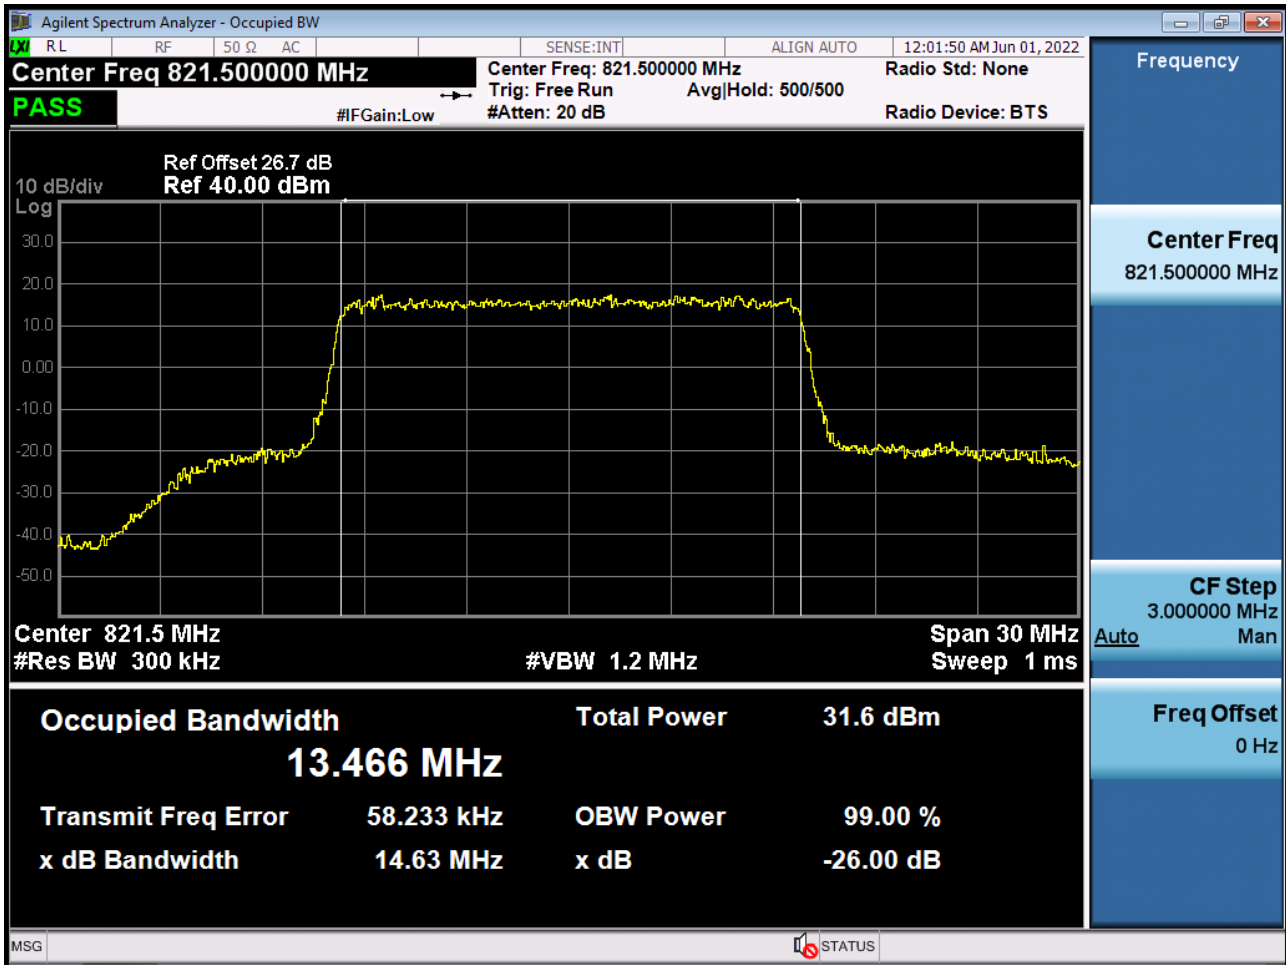


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 16QAM RB 75_0)

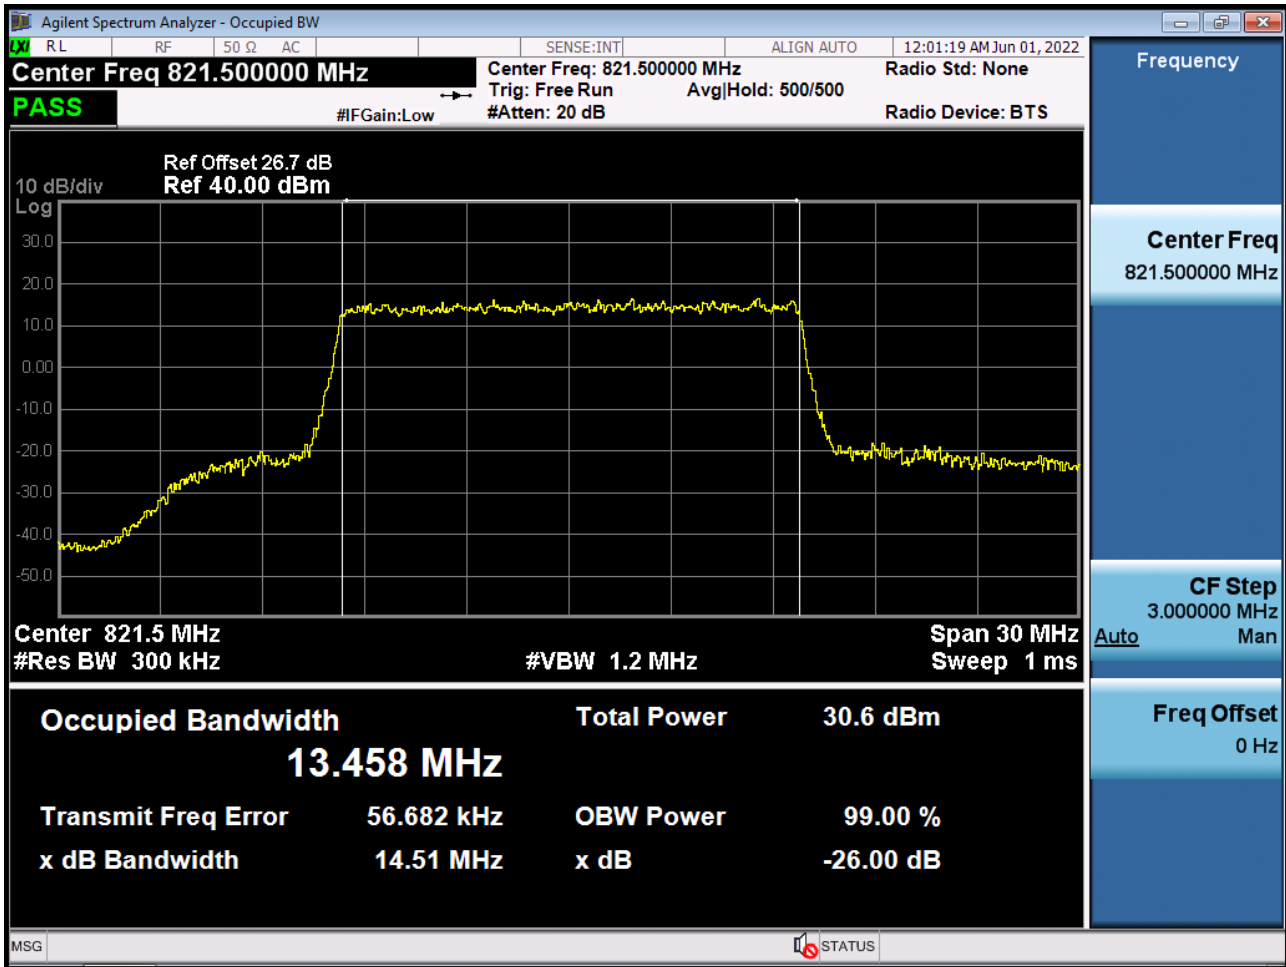


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 64QAM RB 75_0)

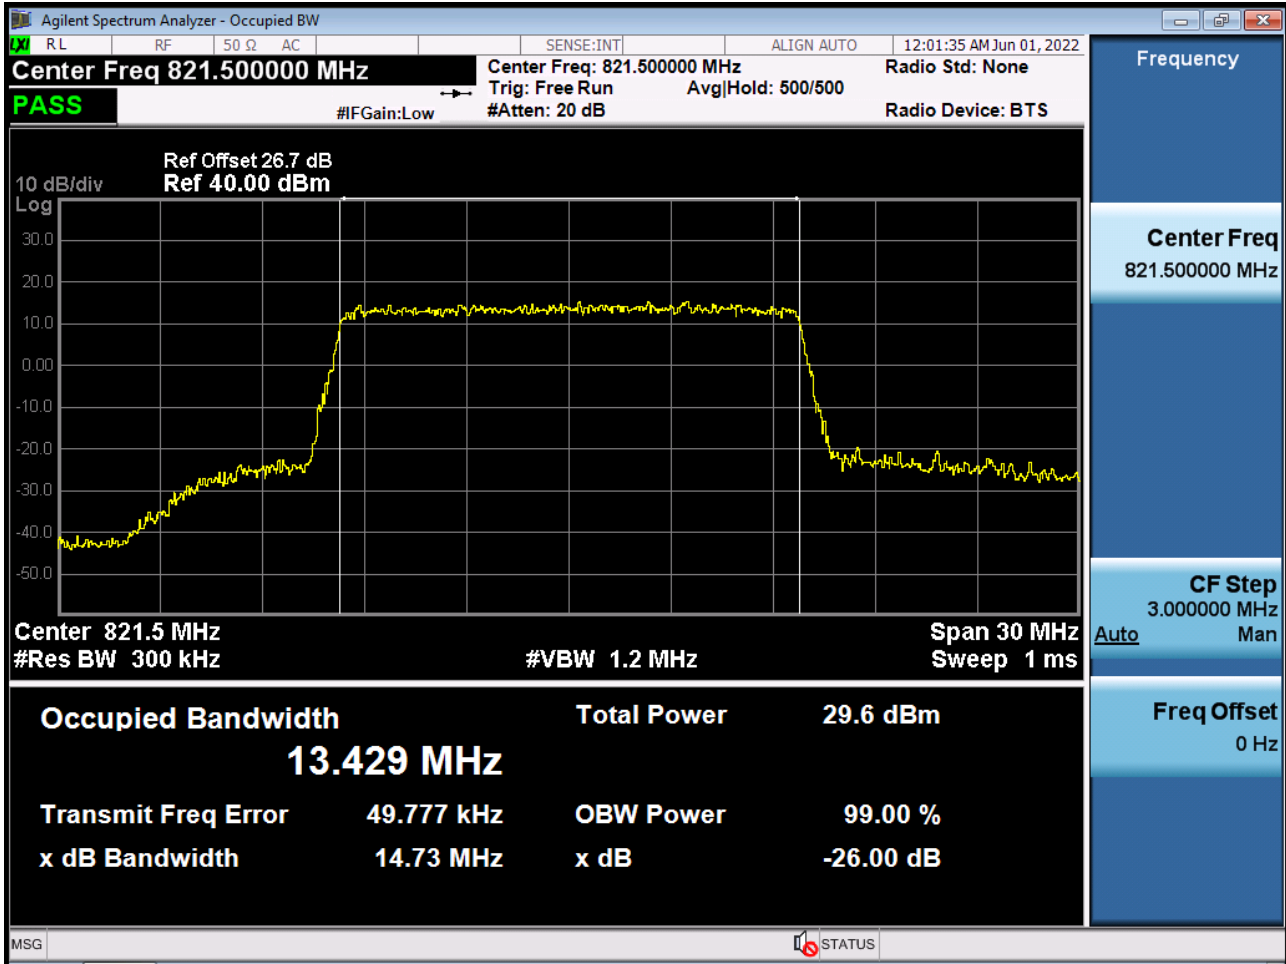


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 256QAM RB 75_0)

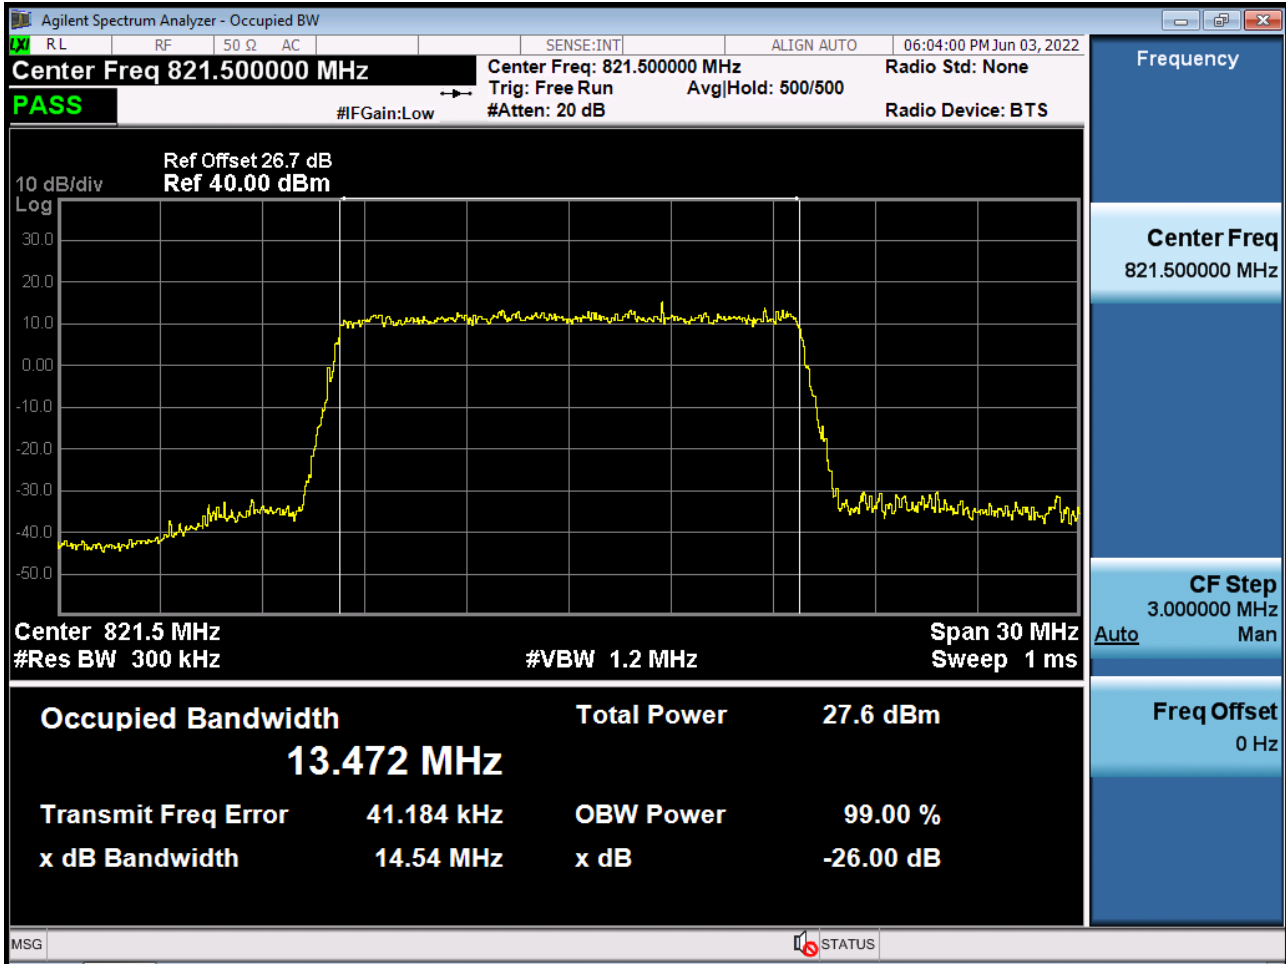


BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK RB 1, Offset 0)

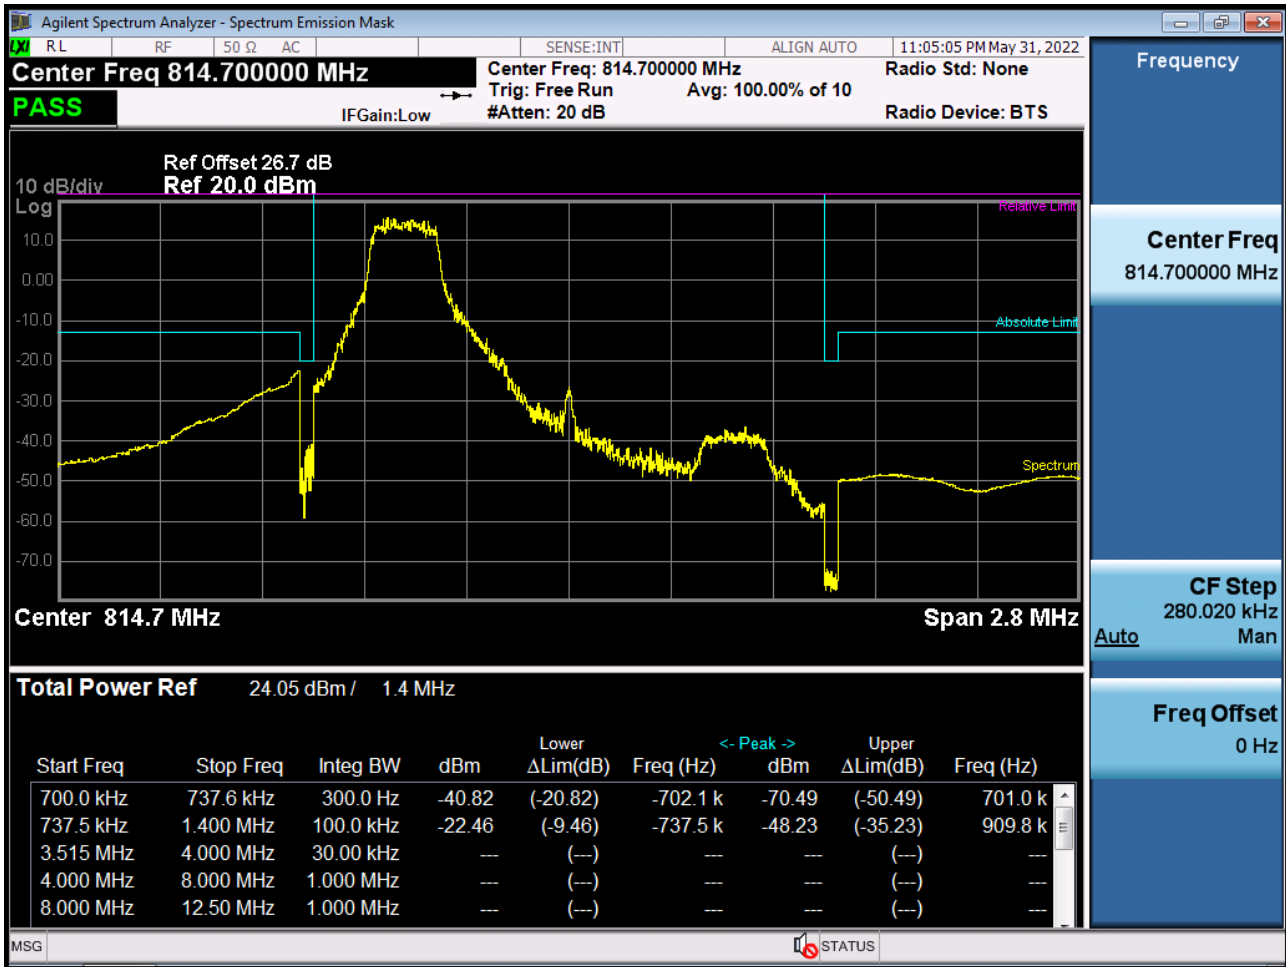


BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK_RB6_Offset 0)

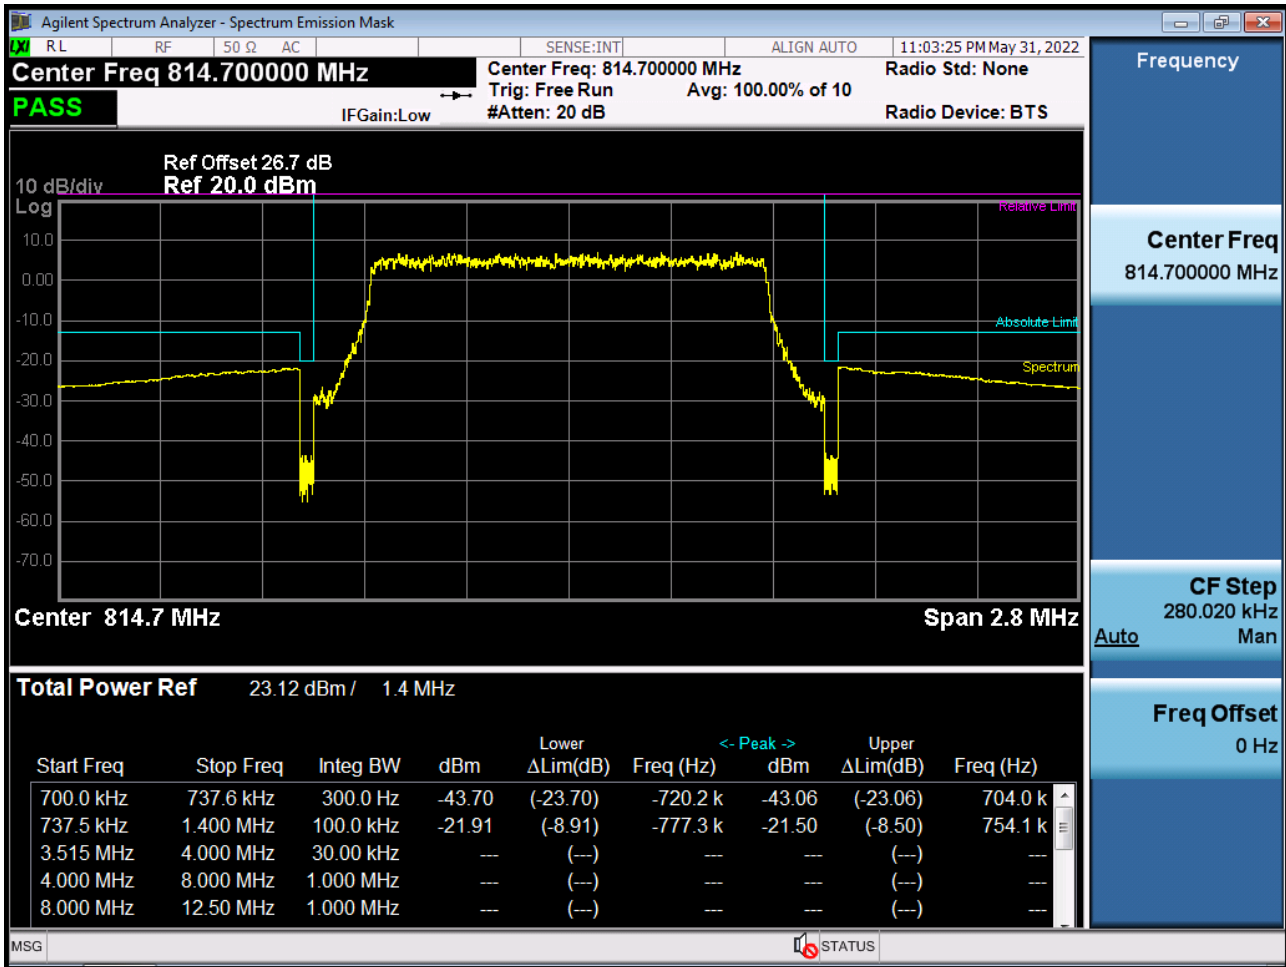


BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK RB 1, Offset 0)

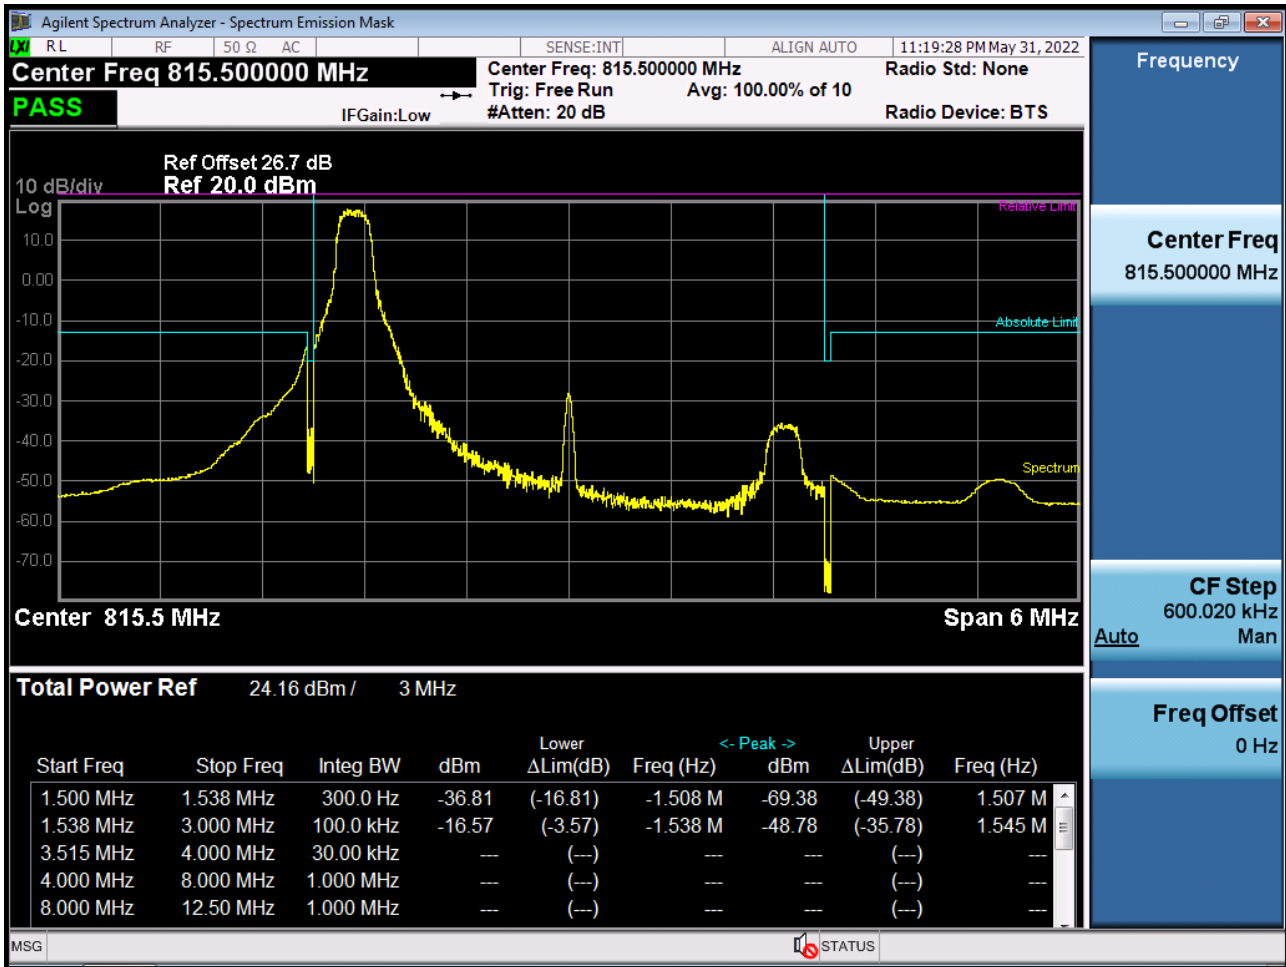


BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK_RB15_Offset 0)

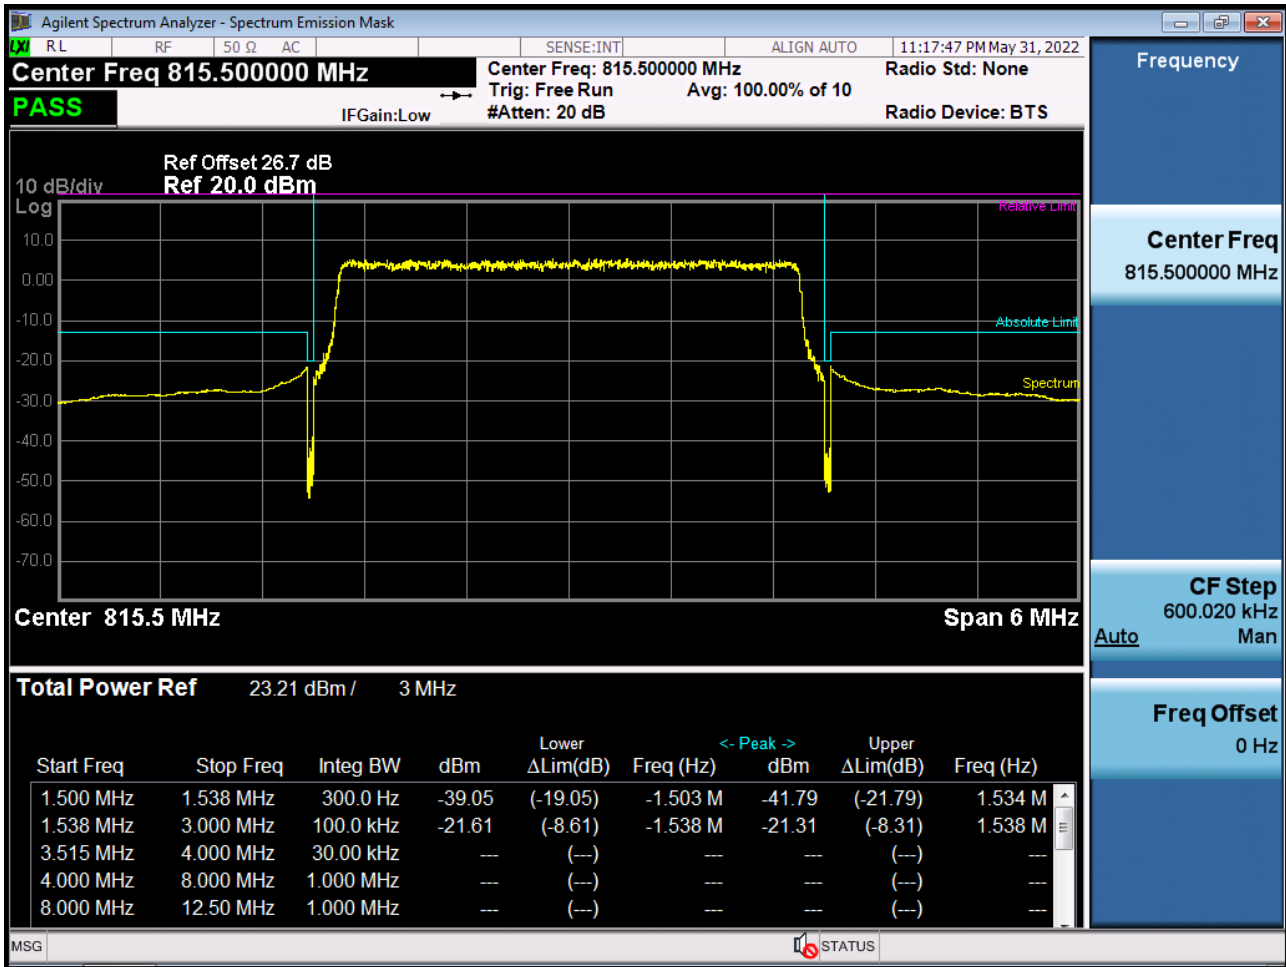


BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK RB 1, Offset 0)

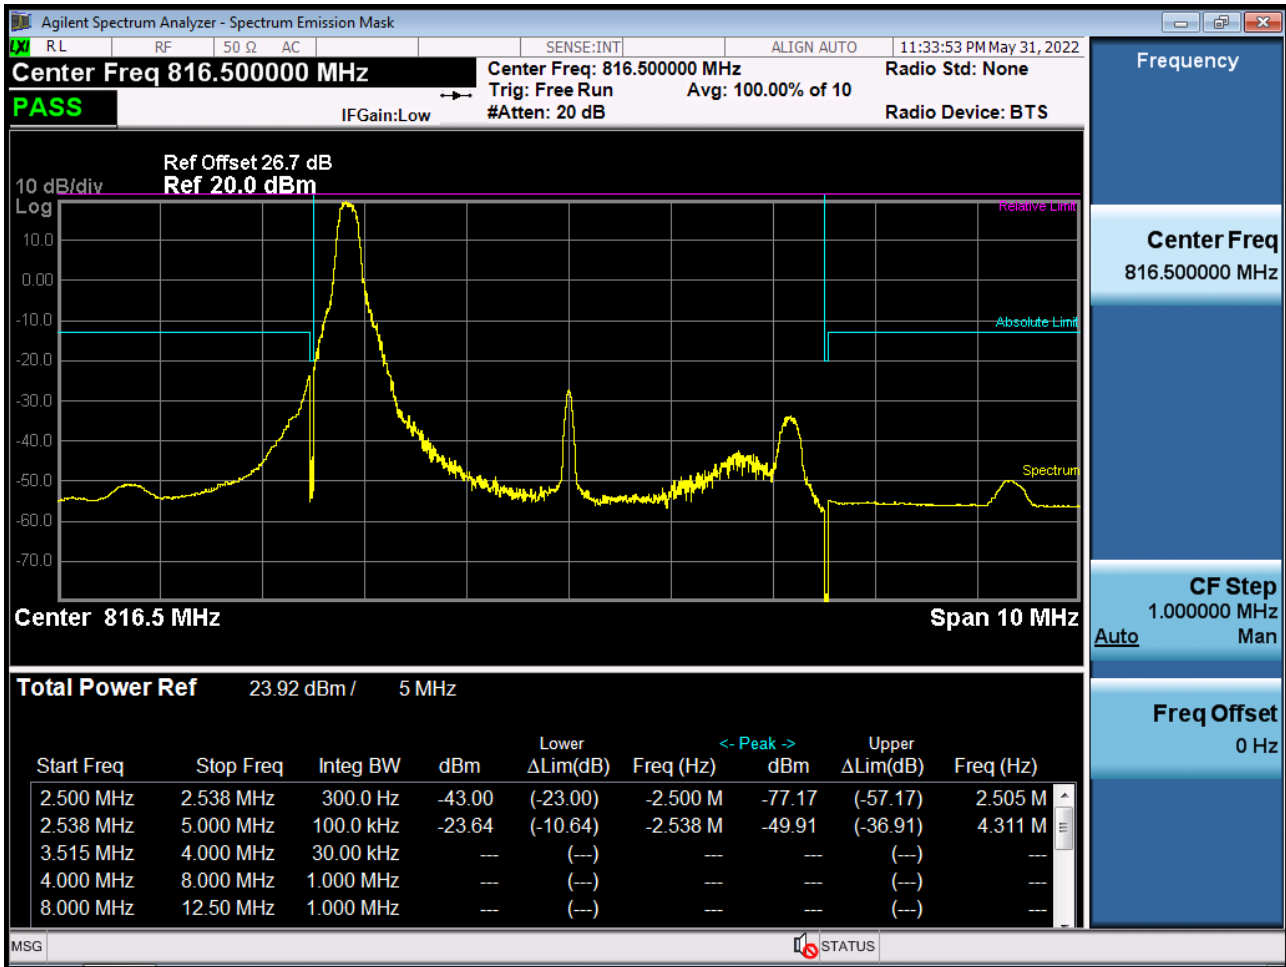


BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK_RB25_Offset 0)

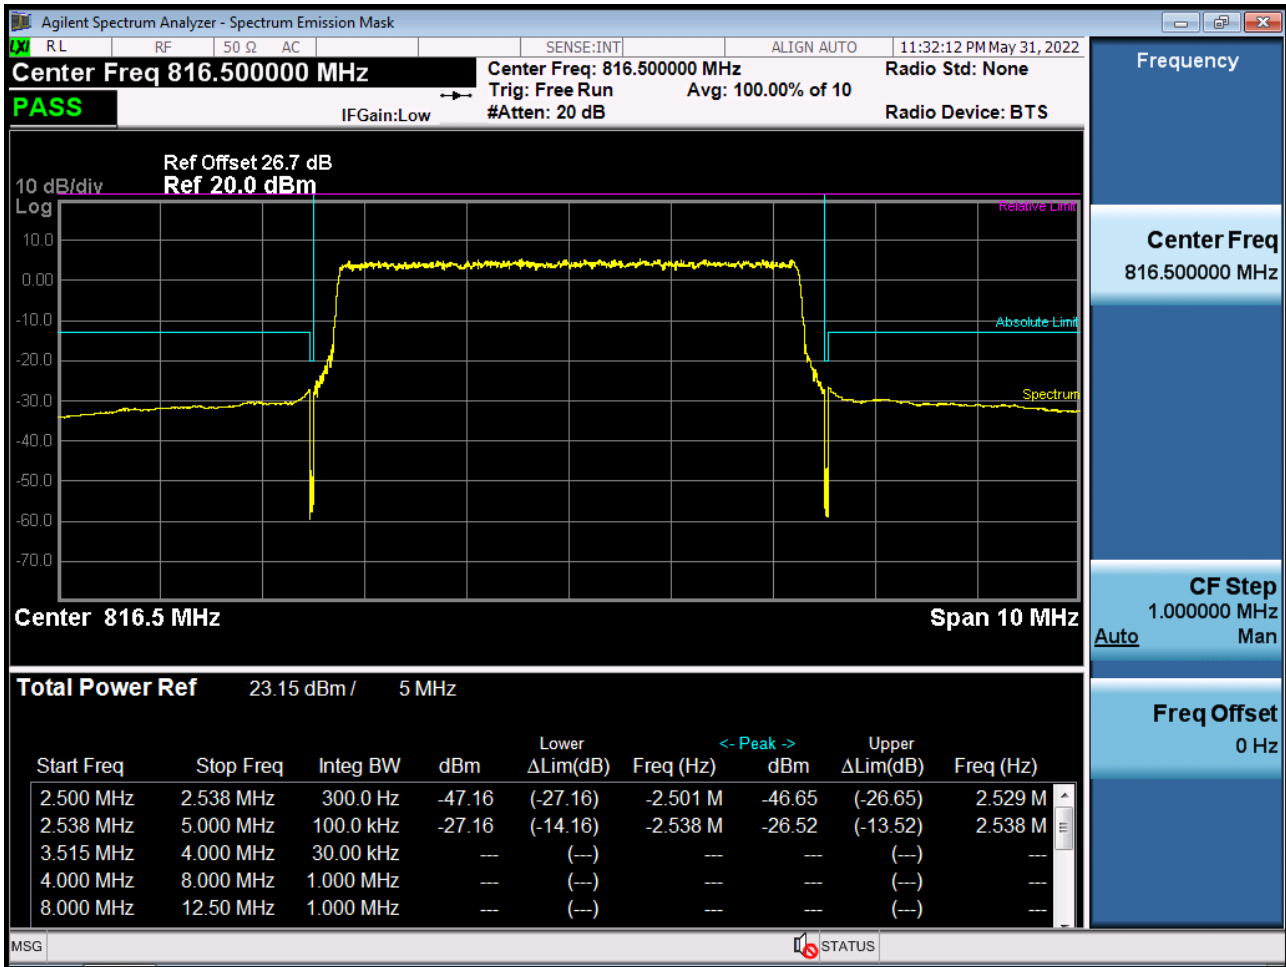


BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK RB 1, Offset 0)

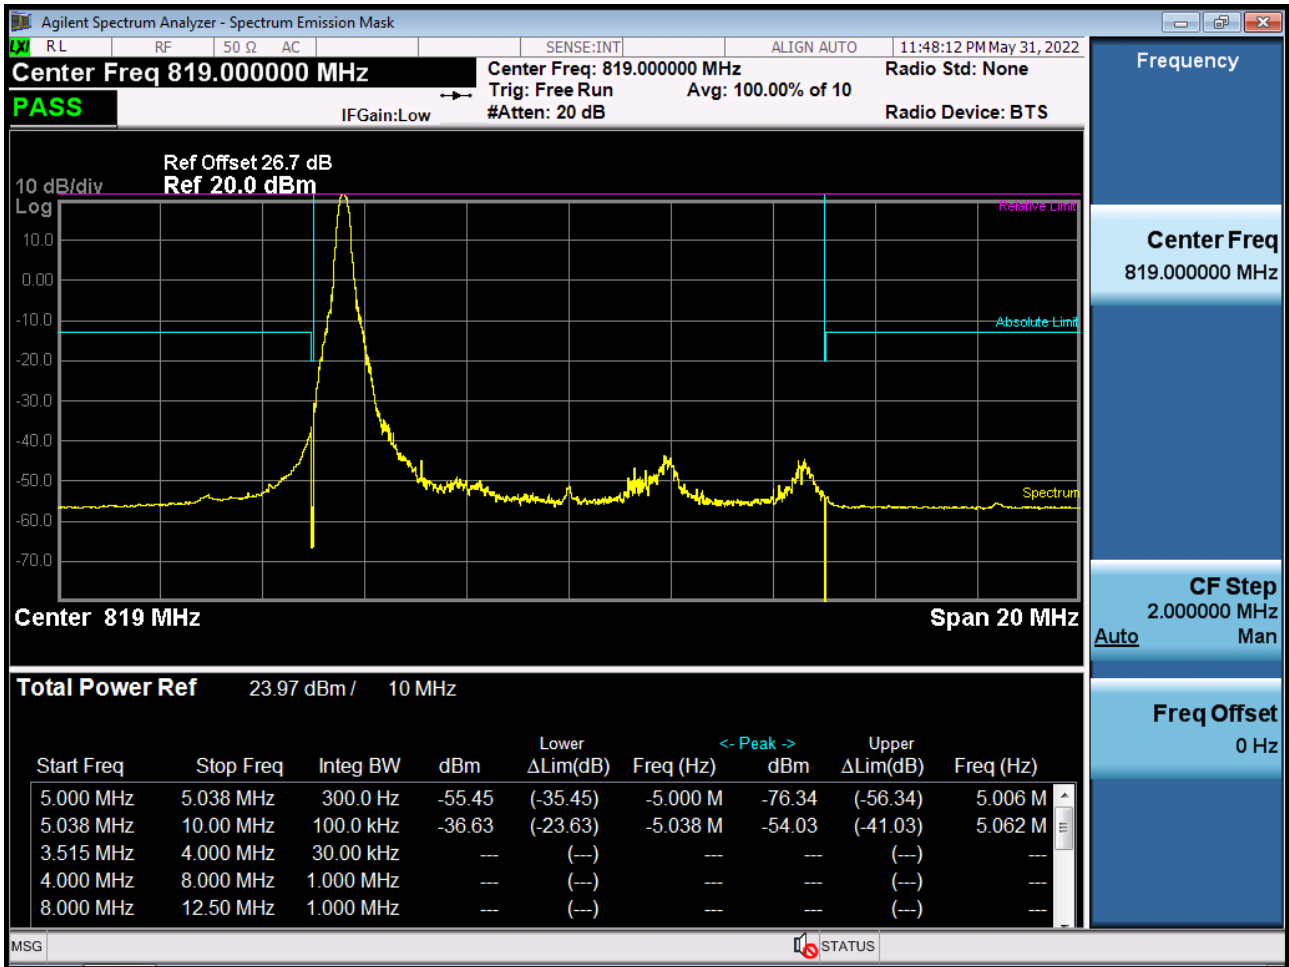


BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK_RB50_Offset 0)

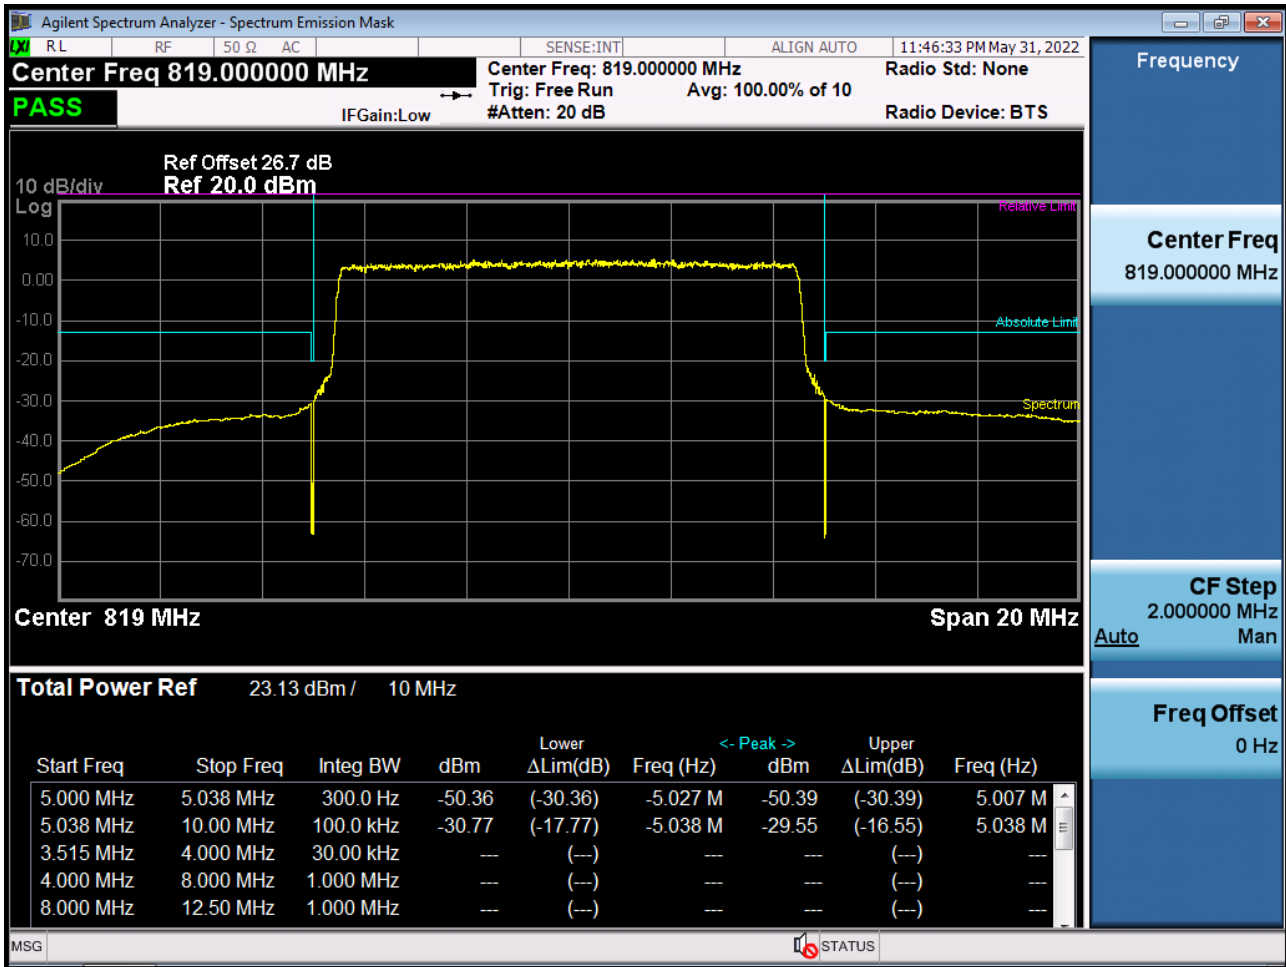


BAND 26. Mid Channel Edge Plot (10 M BW Ch. 26740 QPSK_RB1_Offset 49)

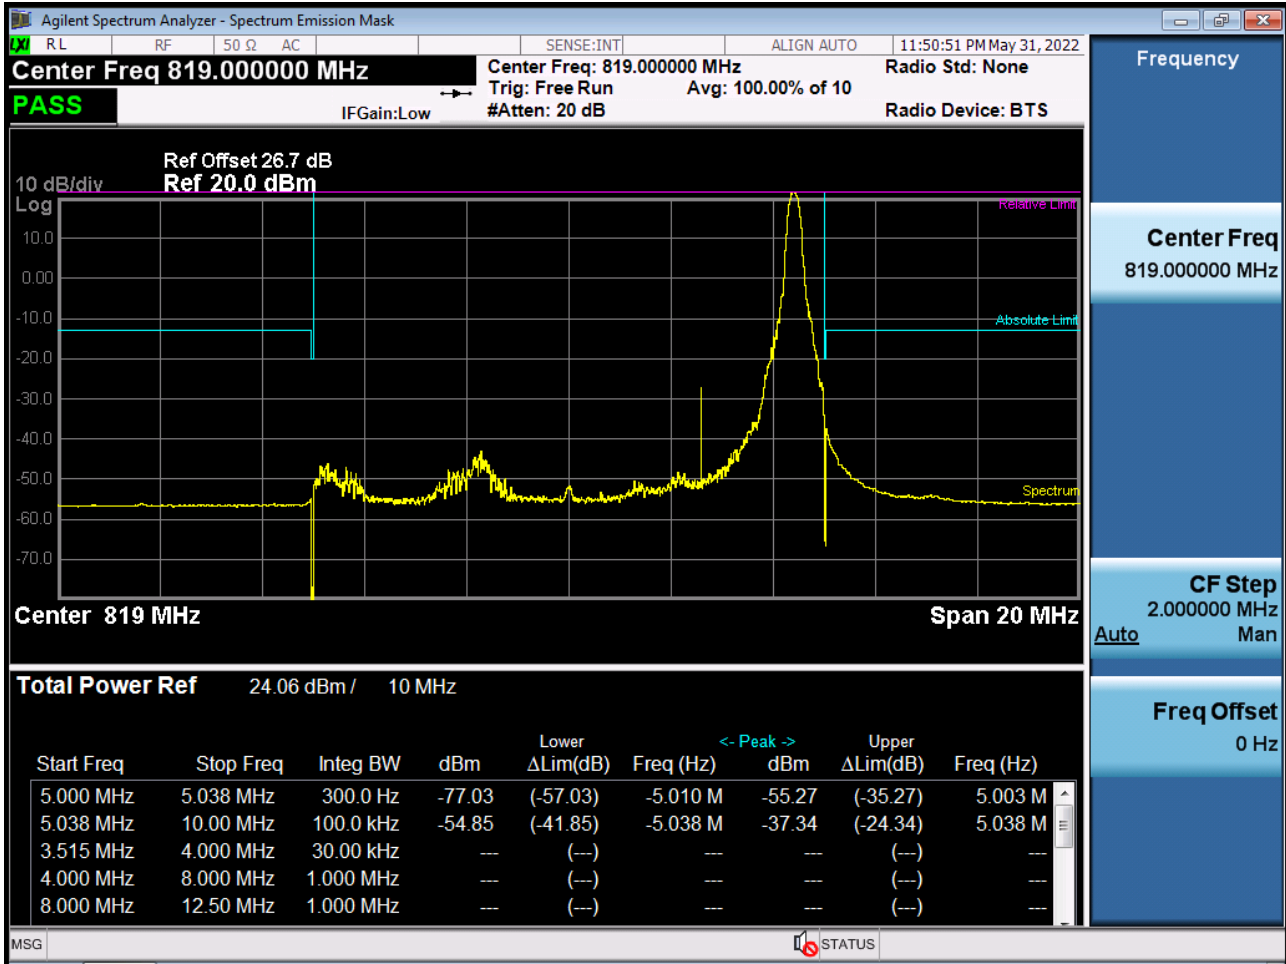


BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset 0)

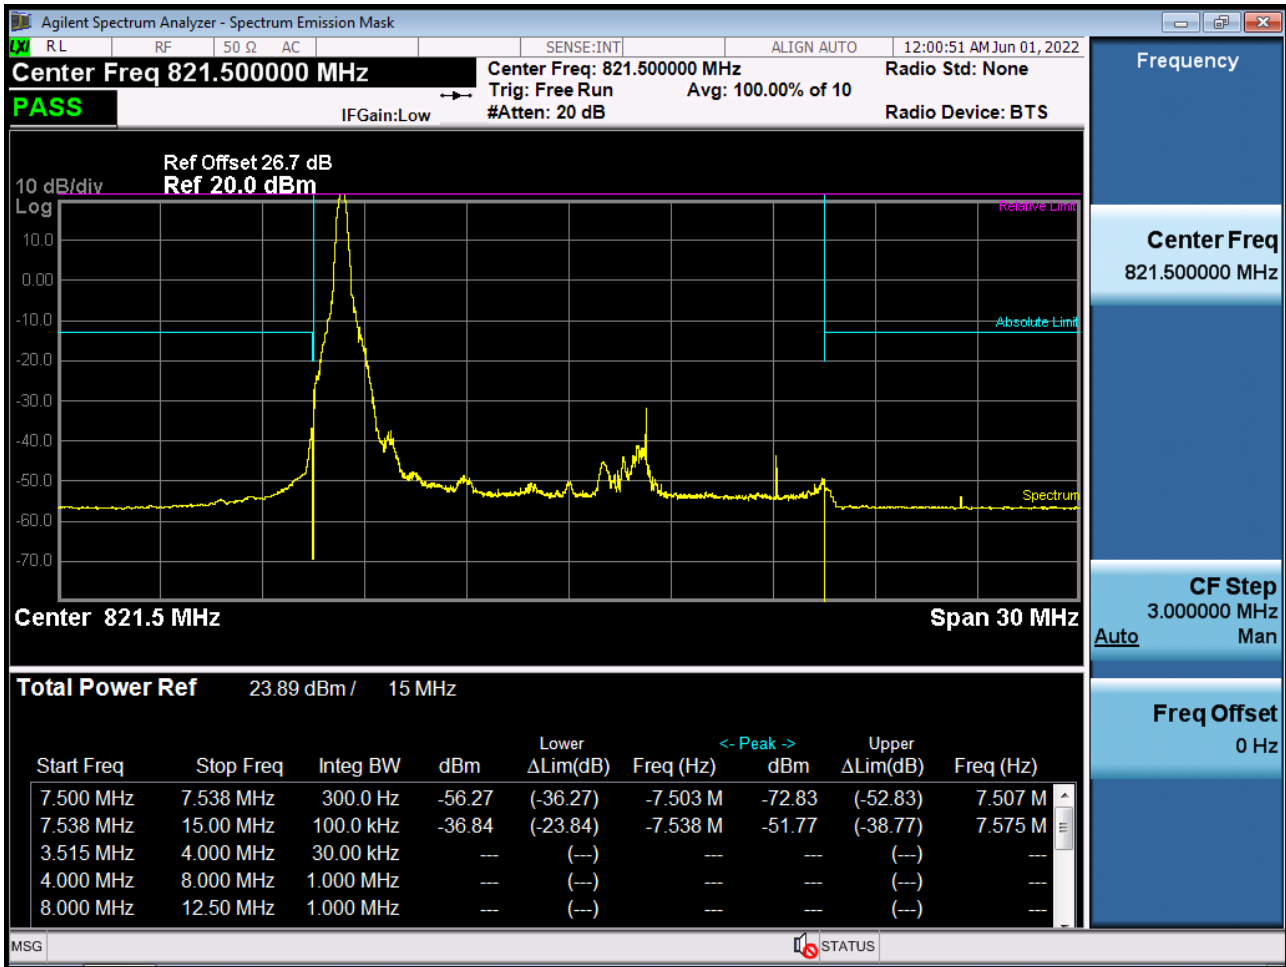

BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 75, Offset0)

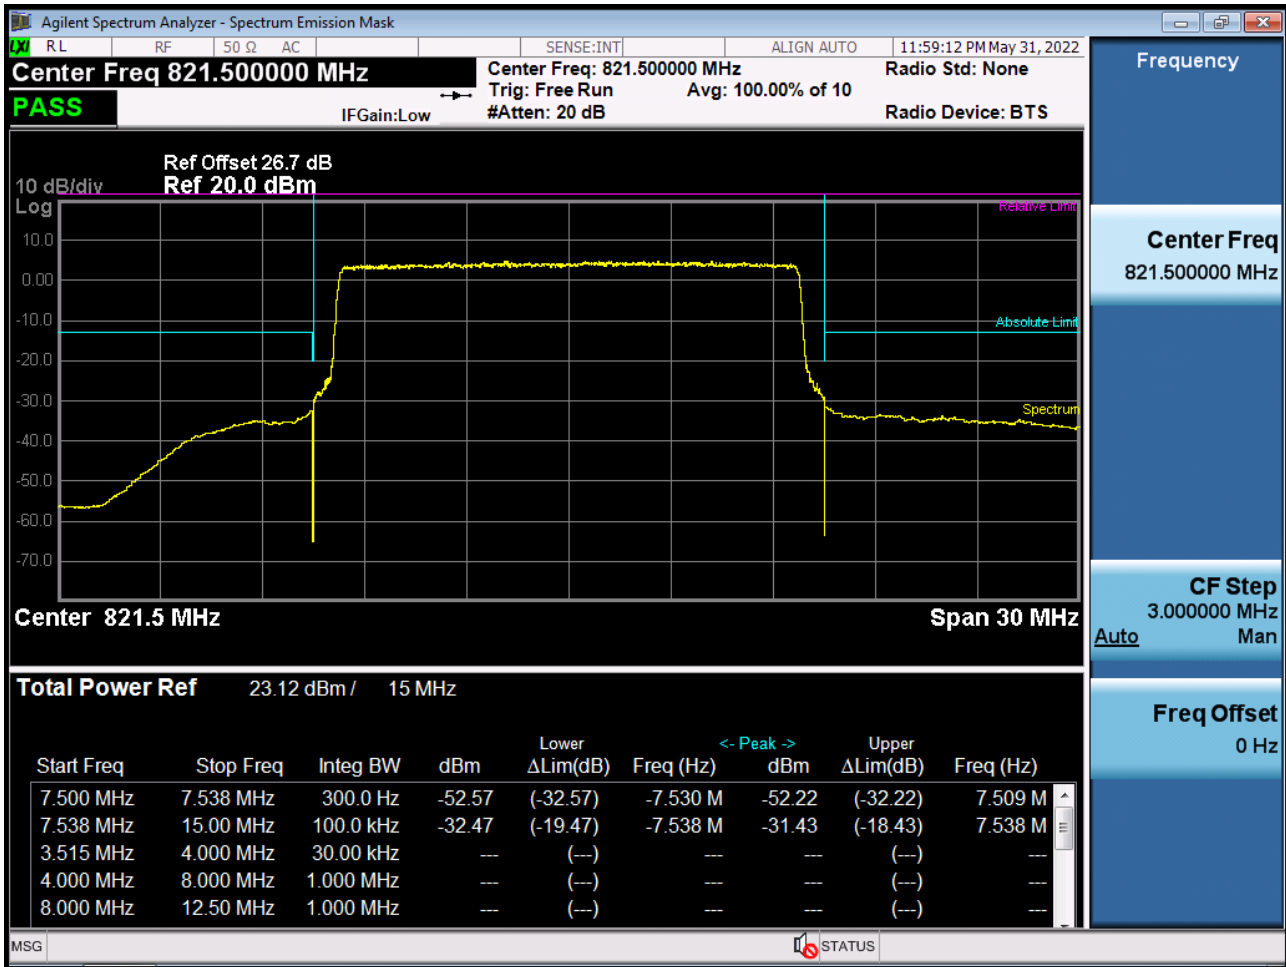

BAND 26. Mid Channel Edge Plot (15 M BW Ch.26765 QPSK_RB1_Offset 74)

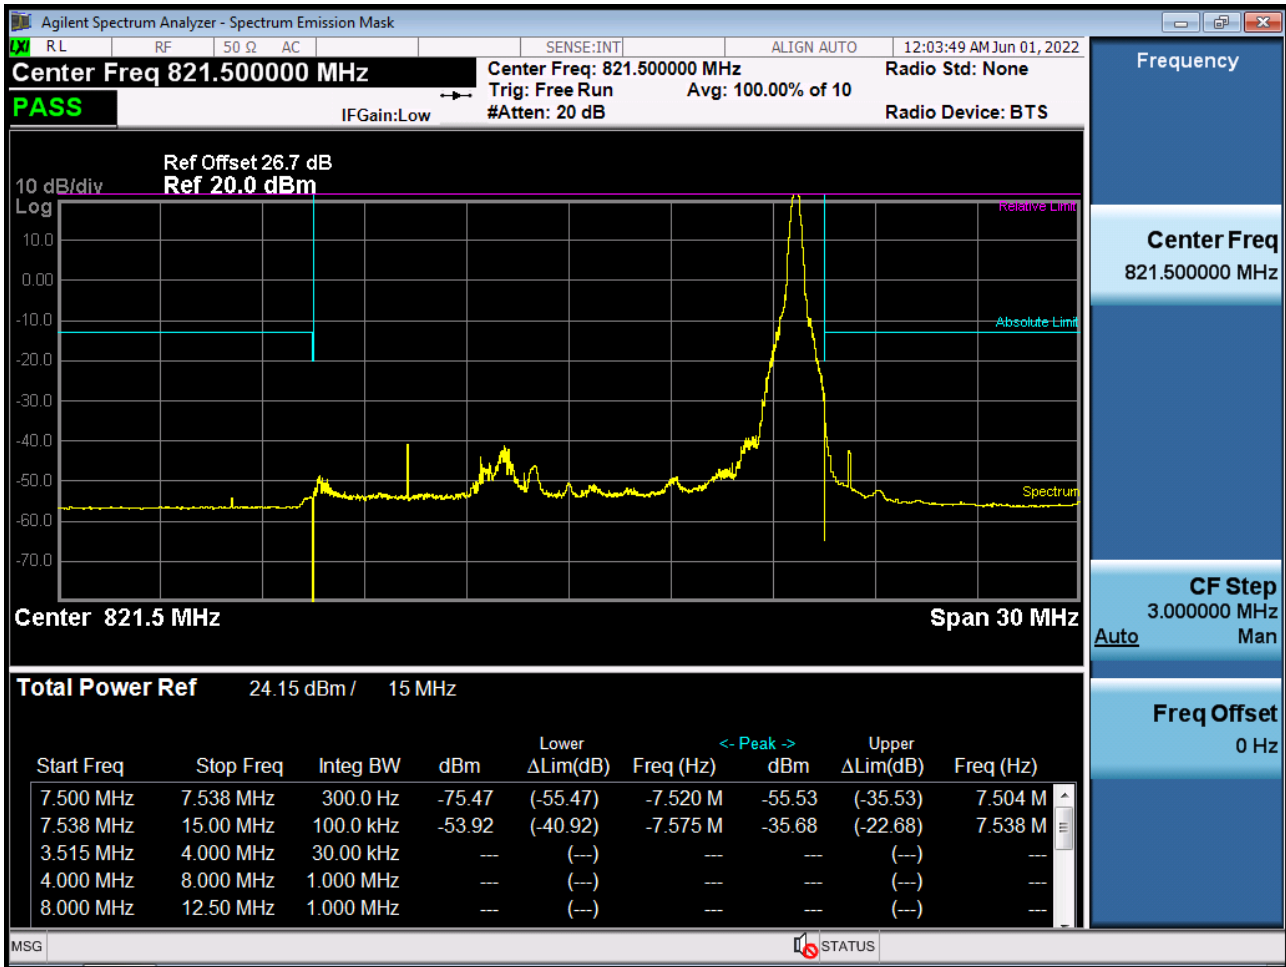


BAND 26. Mid Band Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset74)




BAND 26. Mid Band Edge Plot (15 M BW Ch.26765 QPSK_RB75_Offset 0)




BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK_RB1_Offset 5)

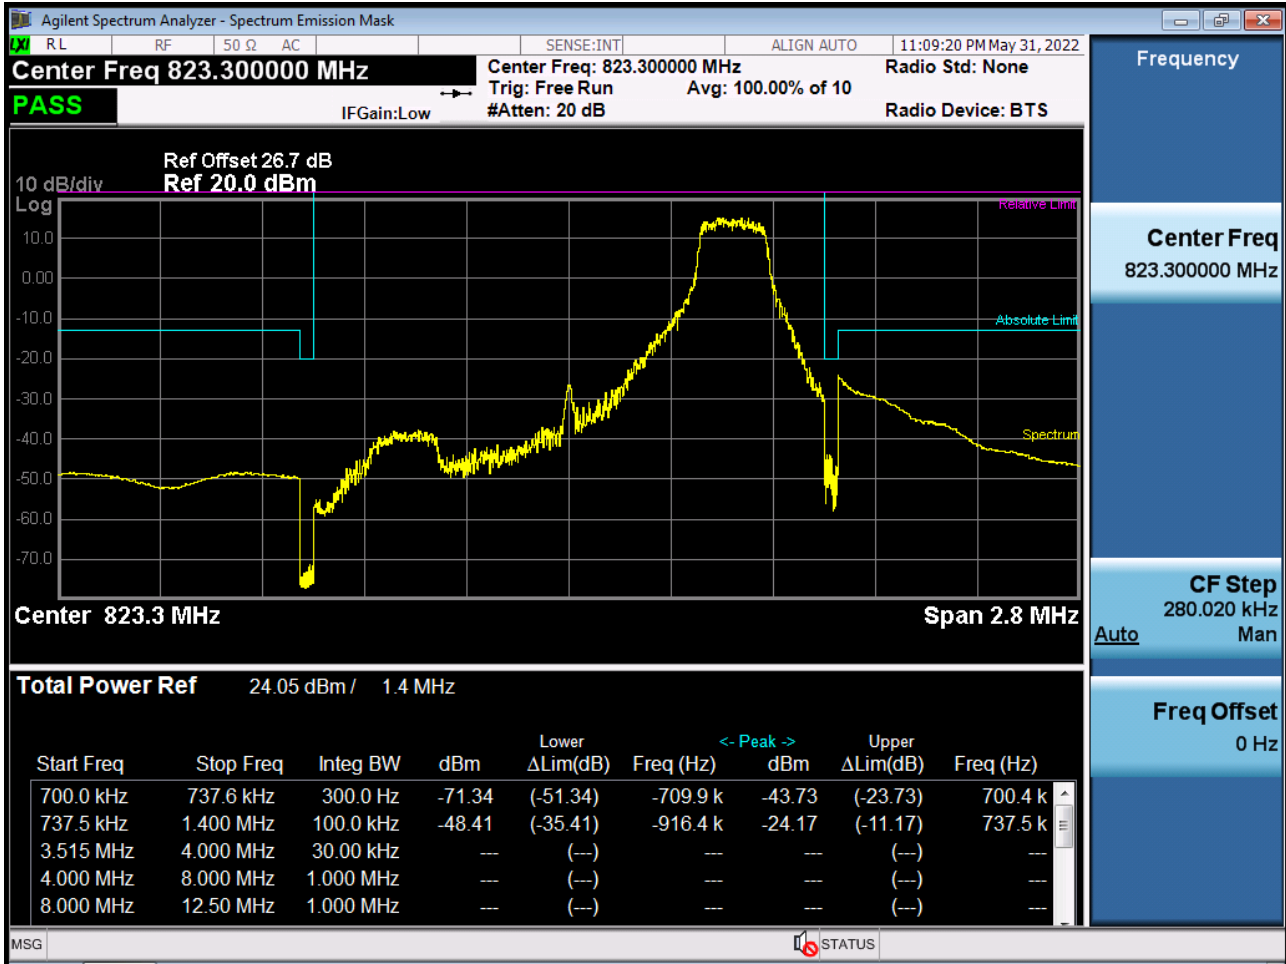


BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK_RB6_Offset 0)

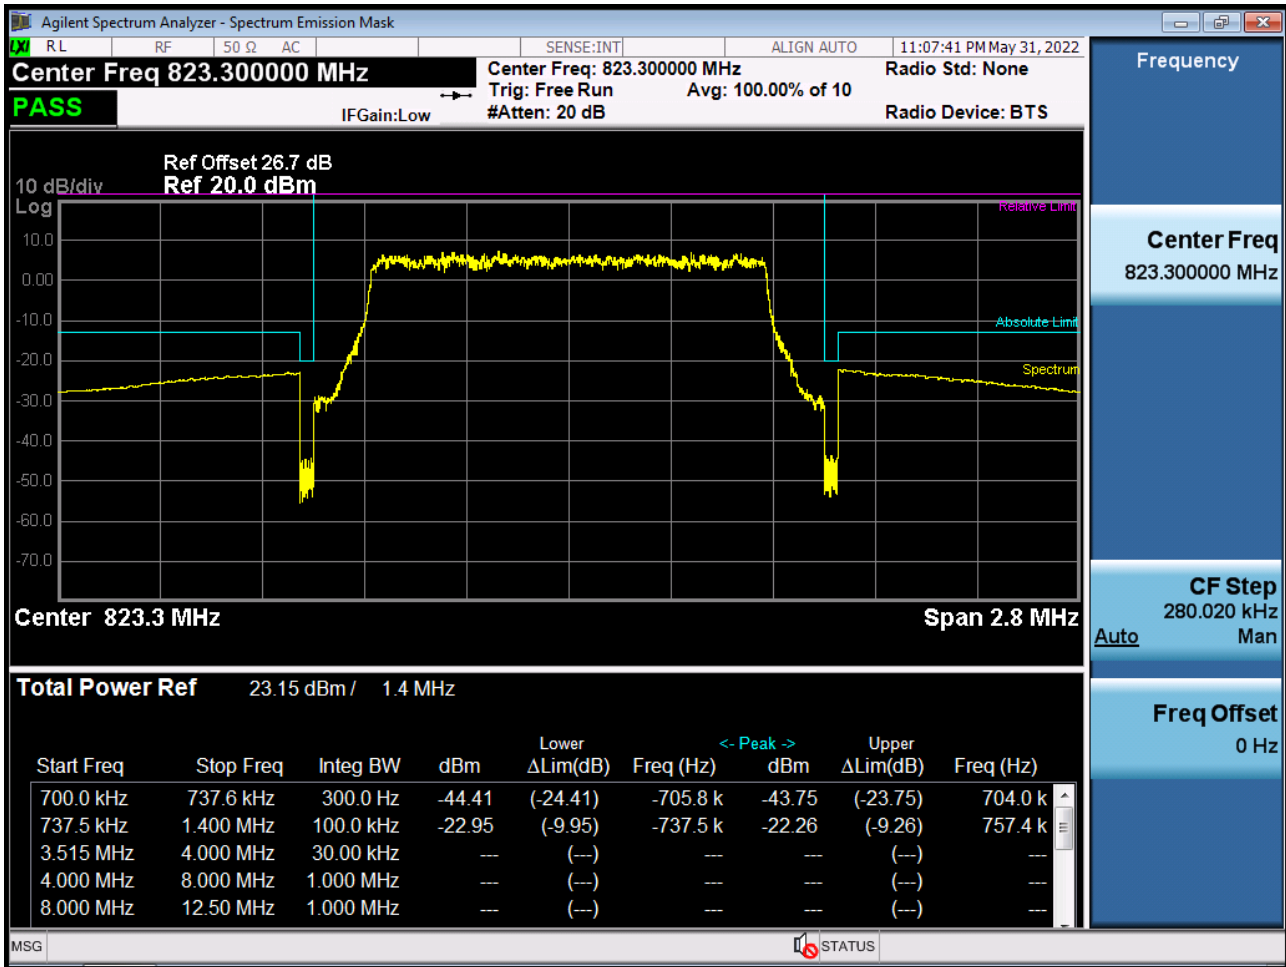


BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK_RB1_Offset 14)

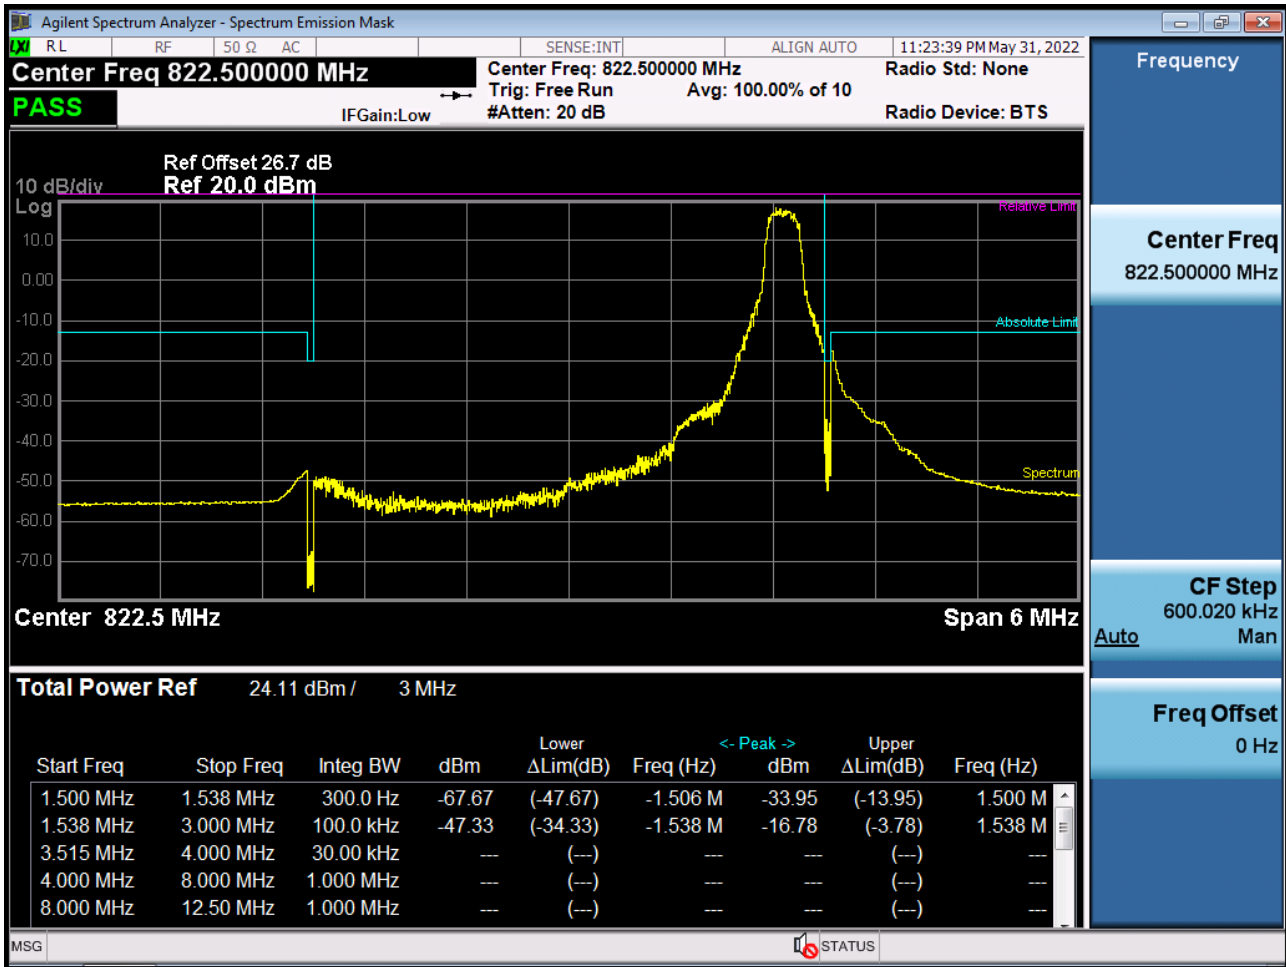


BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK_RB15_Offset 0)

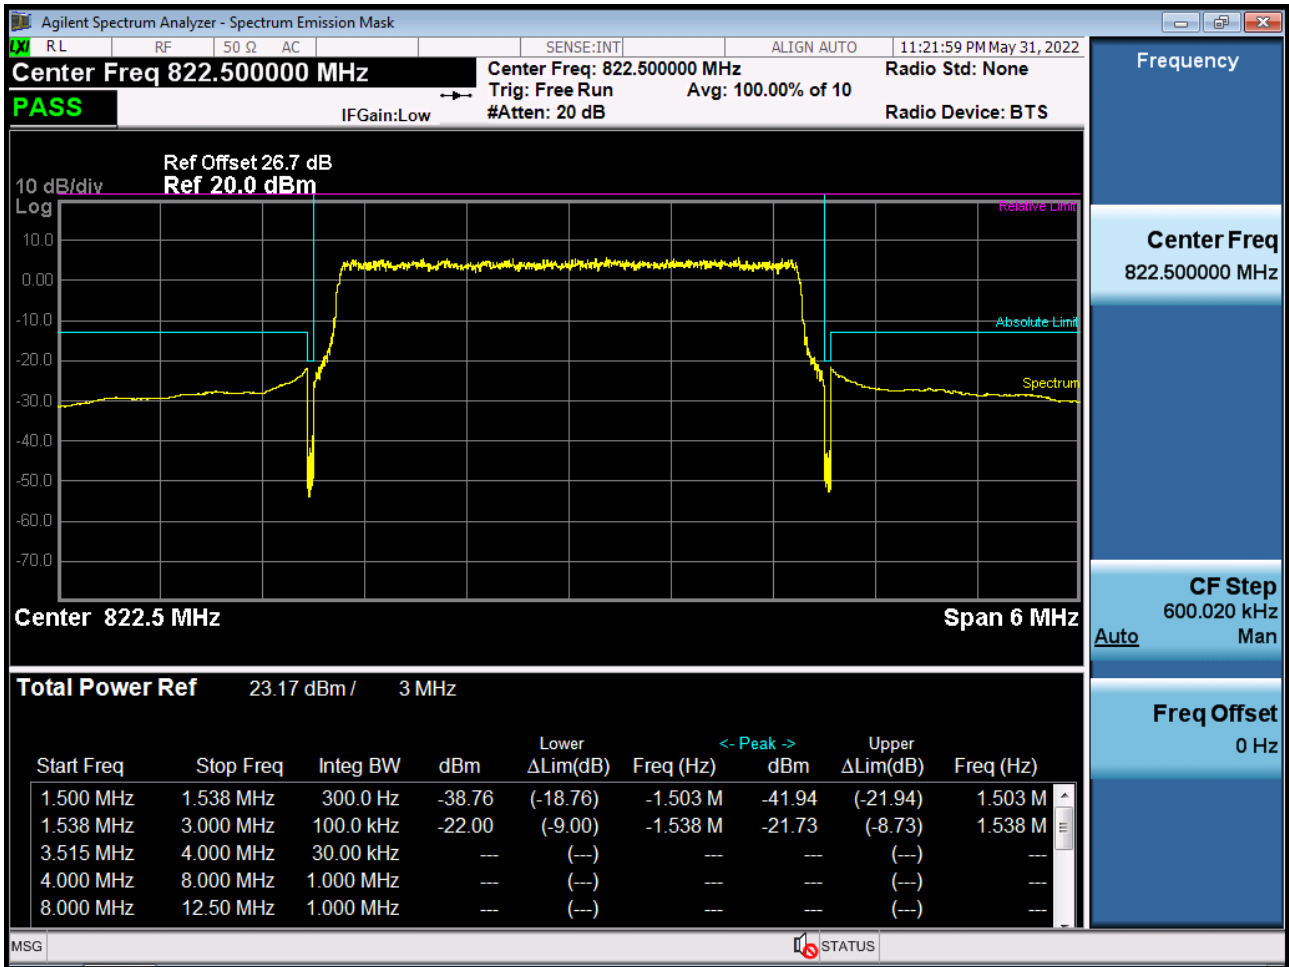


BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK_RB1_Offset 24)

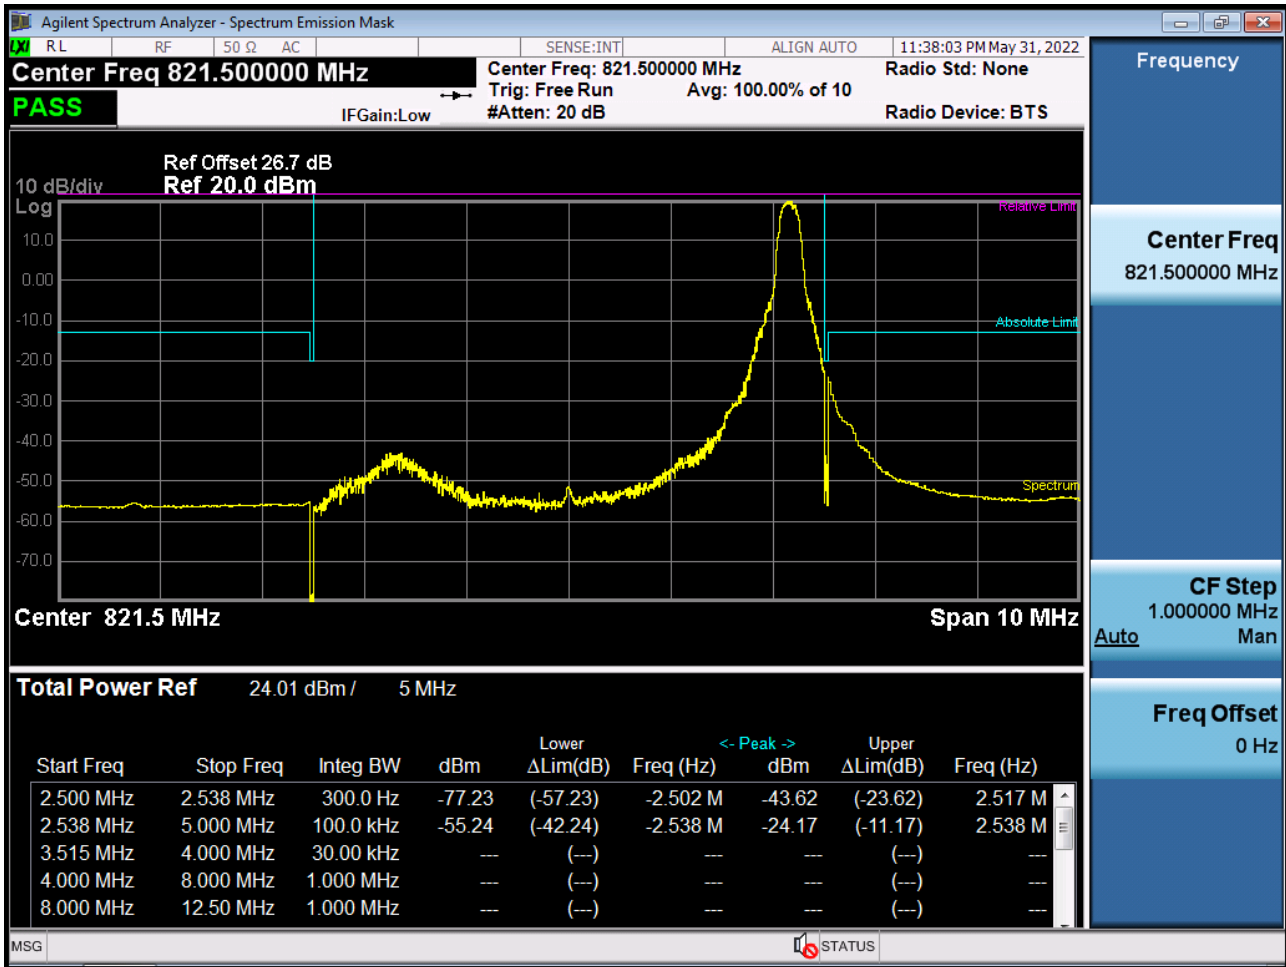


BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK_RB25_Offset 0)

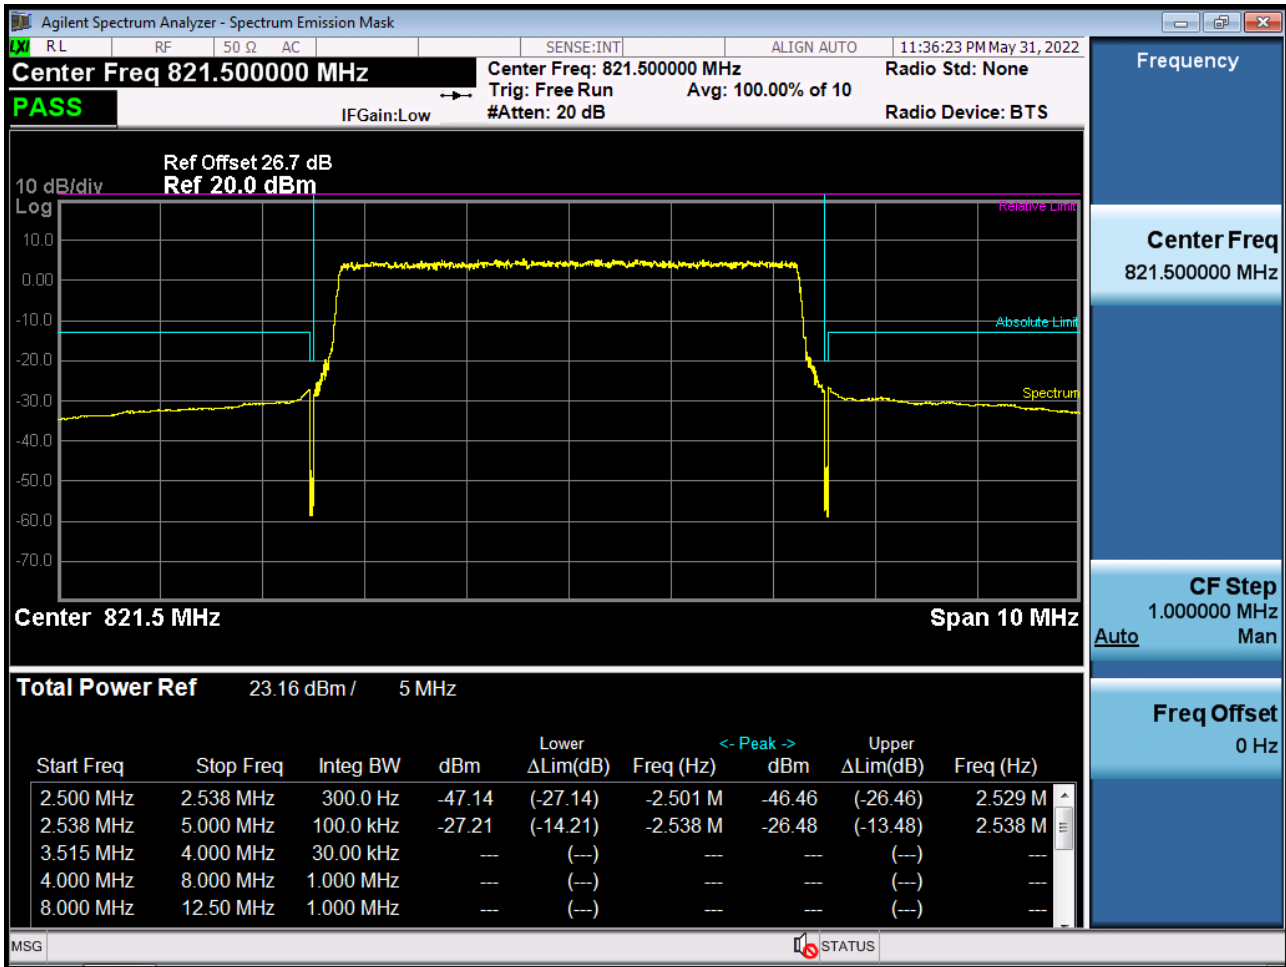


BAND 26. Conducted Spurious (26697 ch_1.4 MHz_QPSK_RB 1_0)

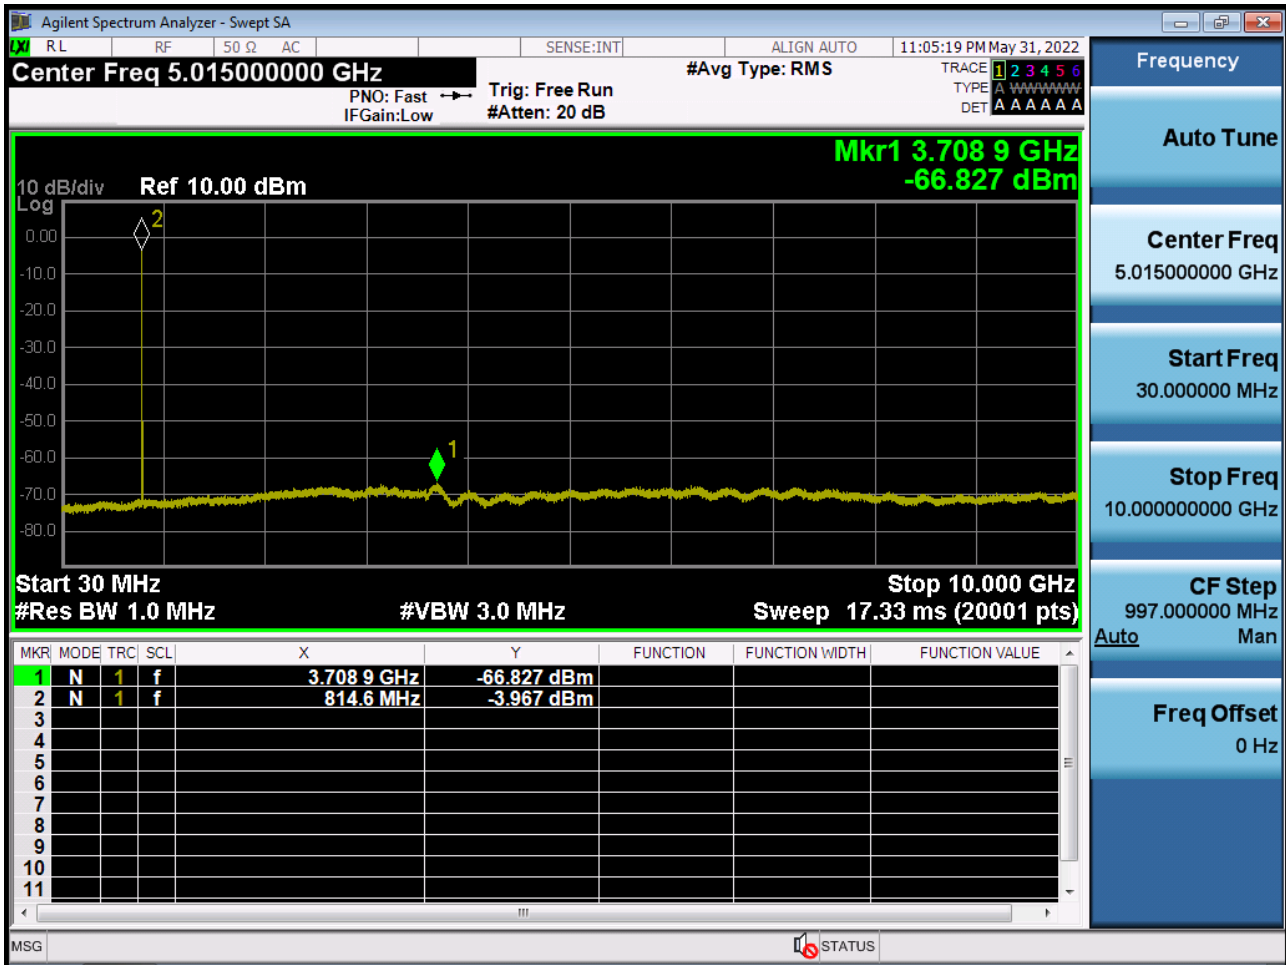


BAND 26. Conducted Spurious (26783 ch_1.4 MHz_QPSK_RB 1_0)

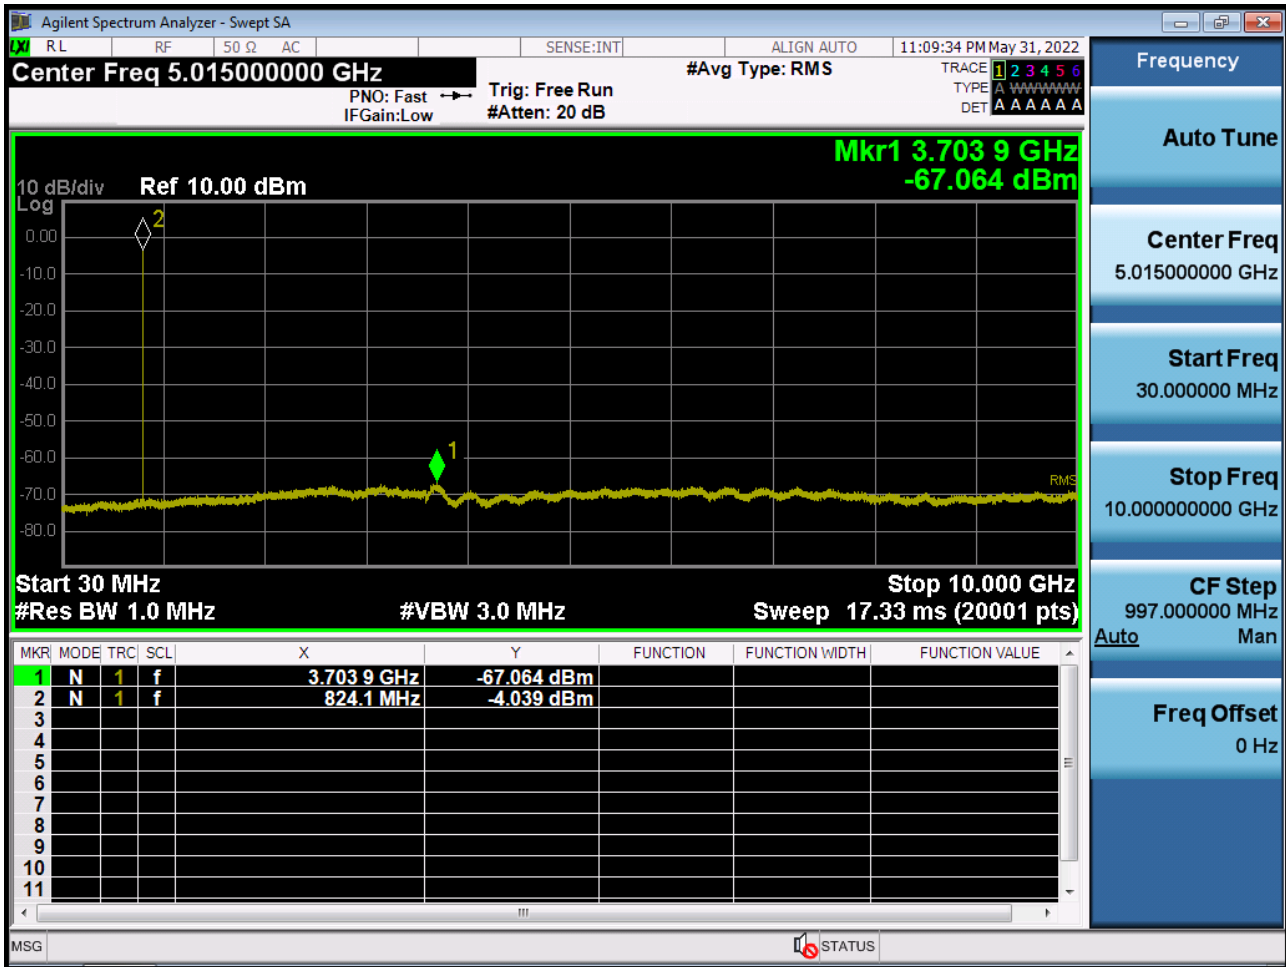


BAND 26. Conducted Spurious (26705 ch_3 MHz_QPSK_RB 1_0)

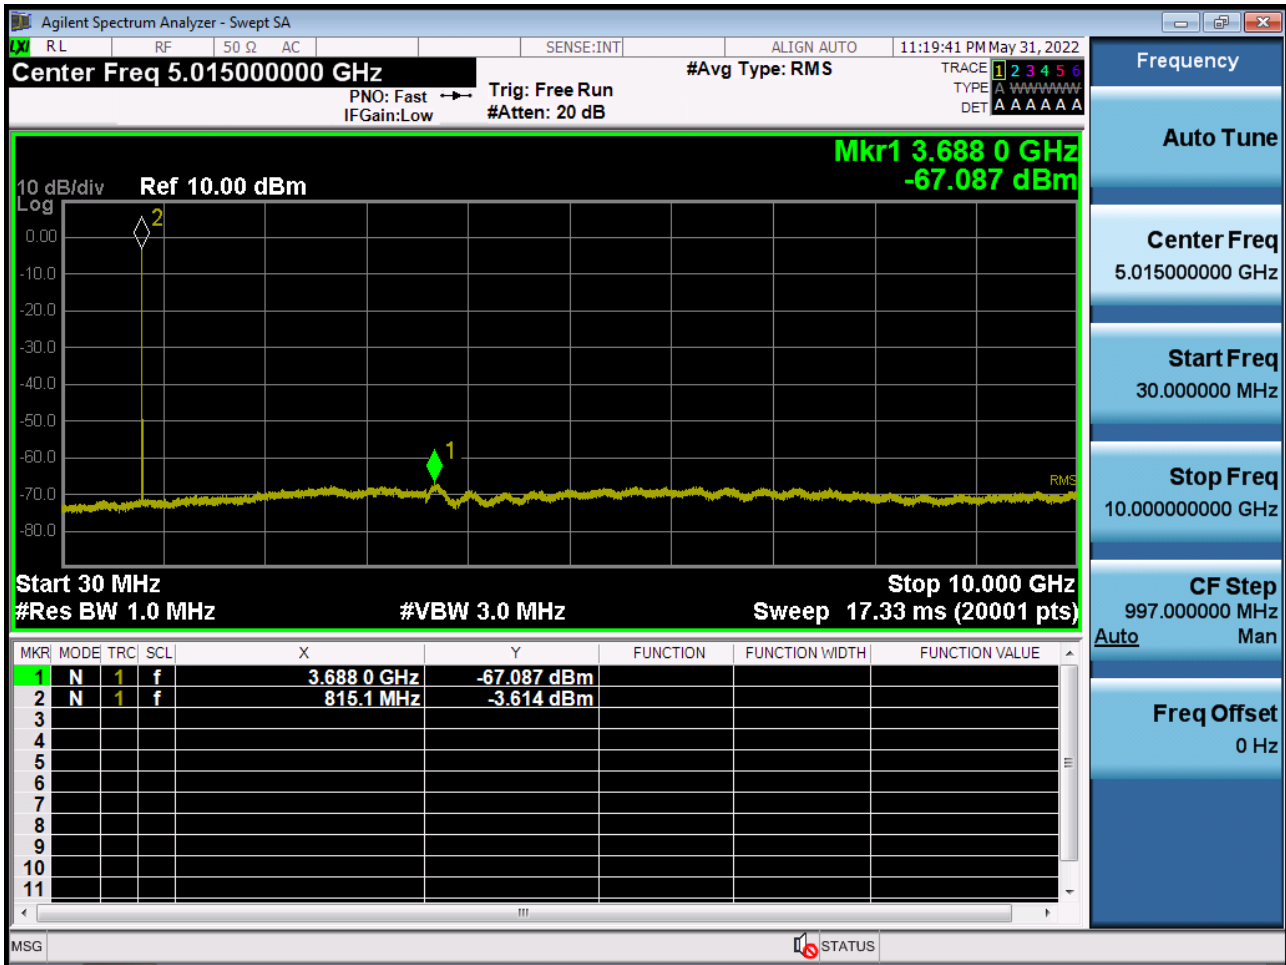


BAND 26. Conducted Spurious (26775 ch_3 MHz_QPSK_RB 1_0)

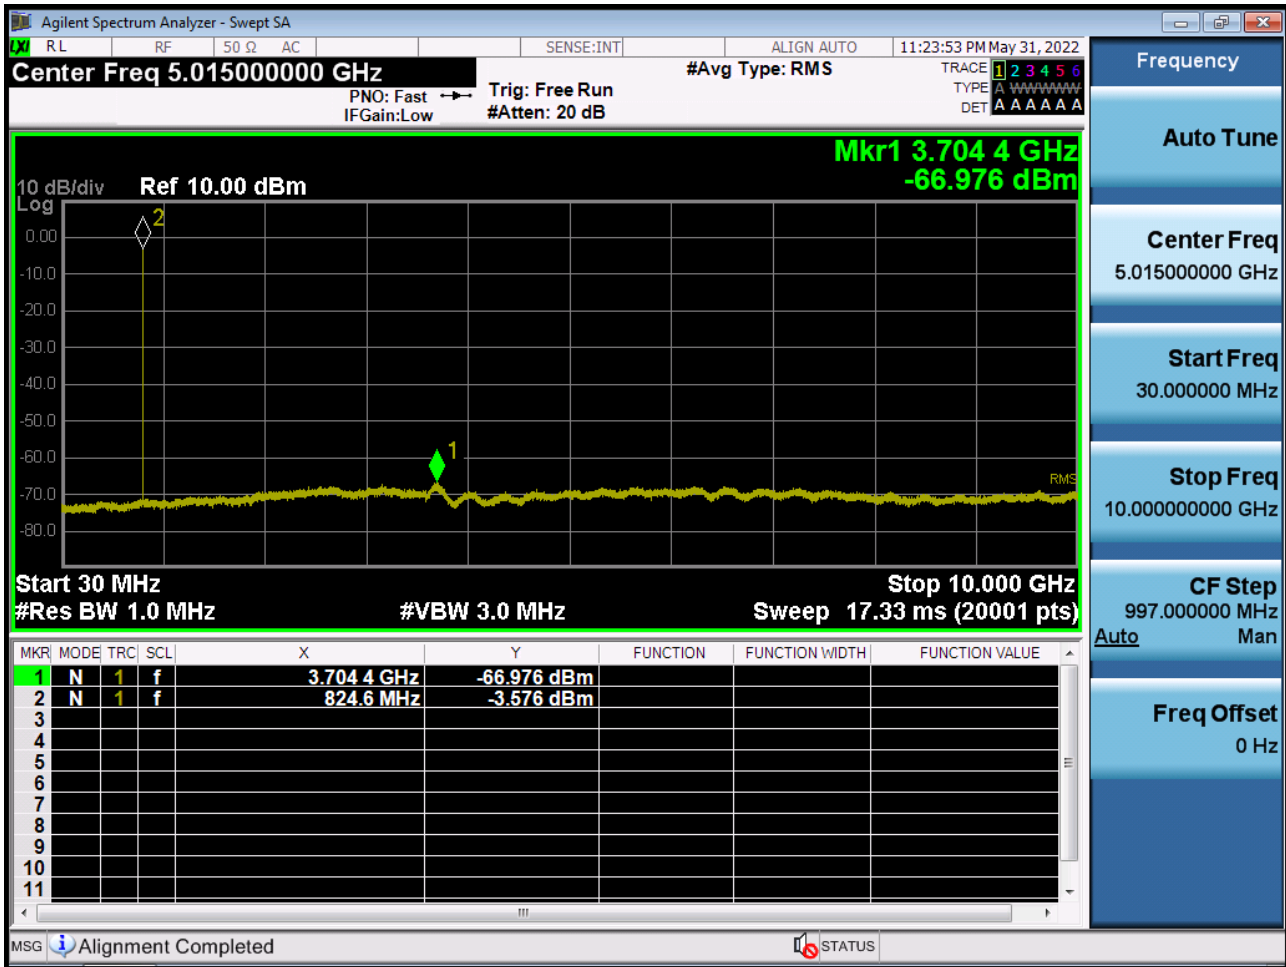


BAND 26. Conducted Spurious (26715 ch_5 MHz_QPSK_RB 1_0)

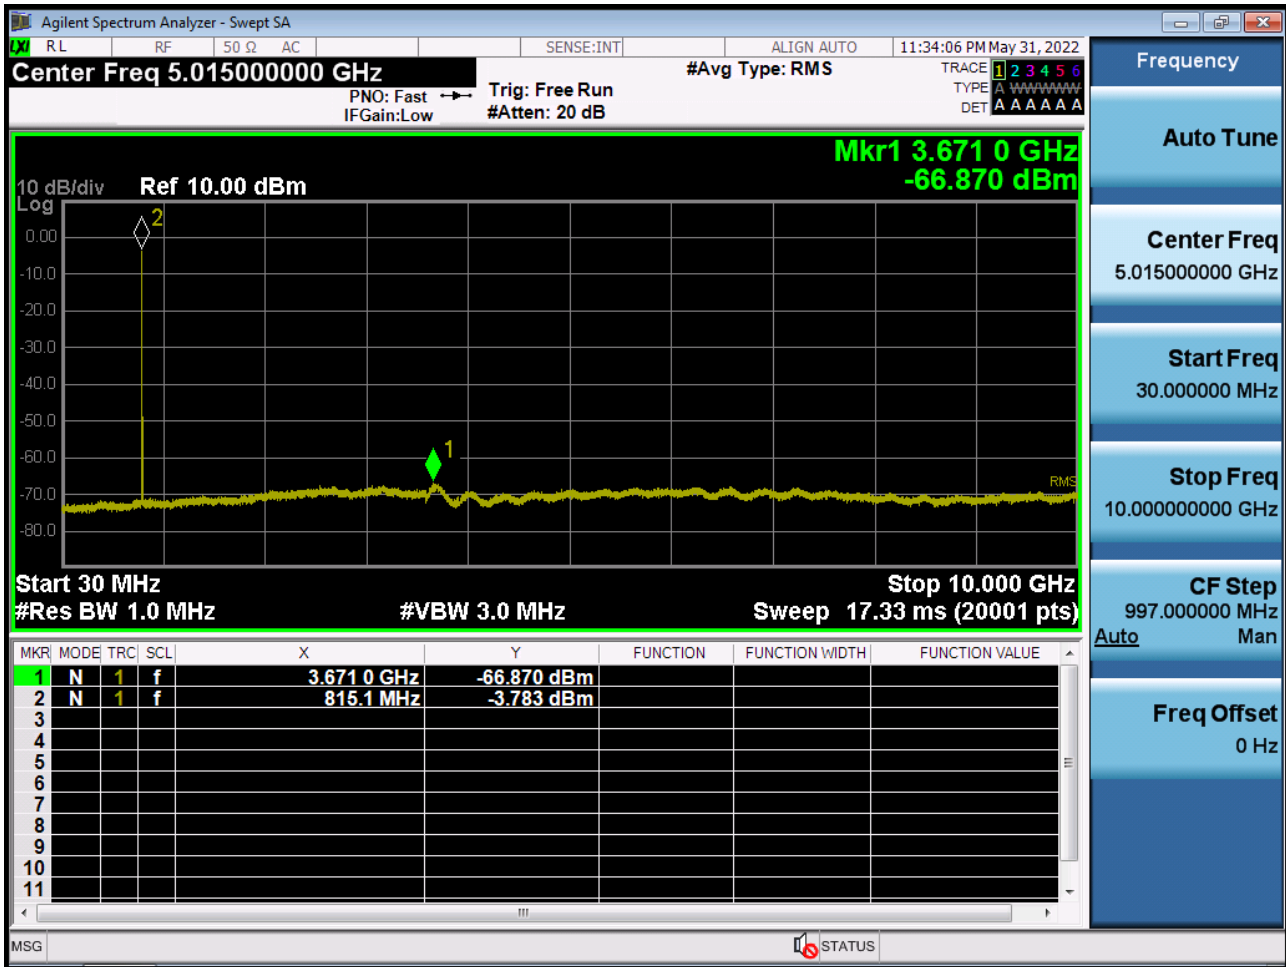


BAND 26. Conducted Spurious (26765 ch_5 MHz_QPSK_RB 1_0)

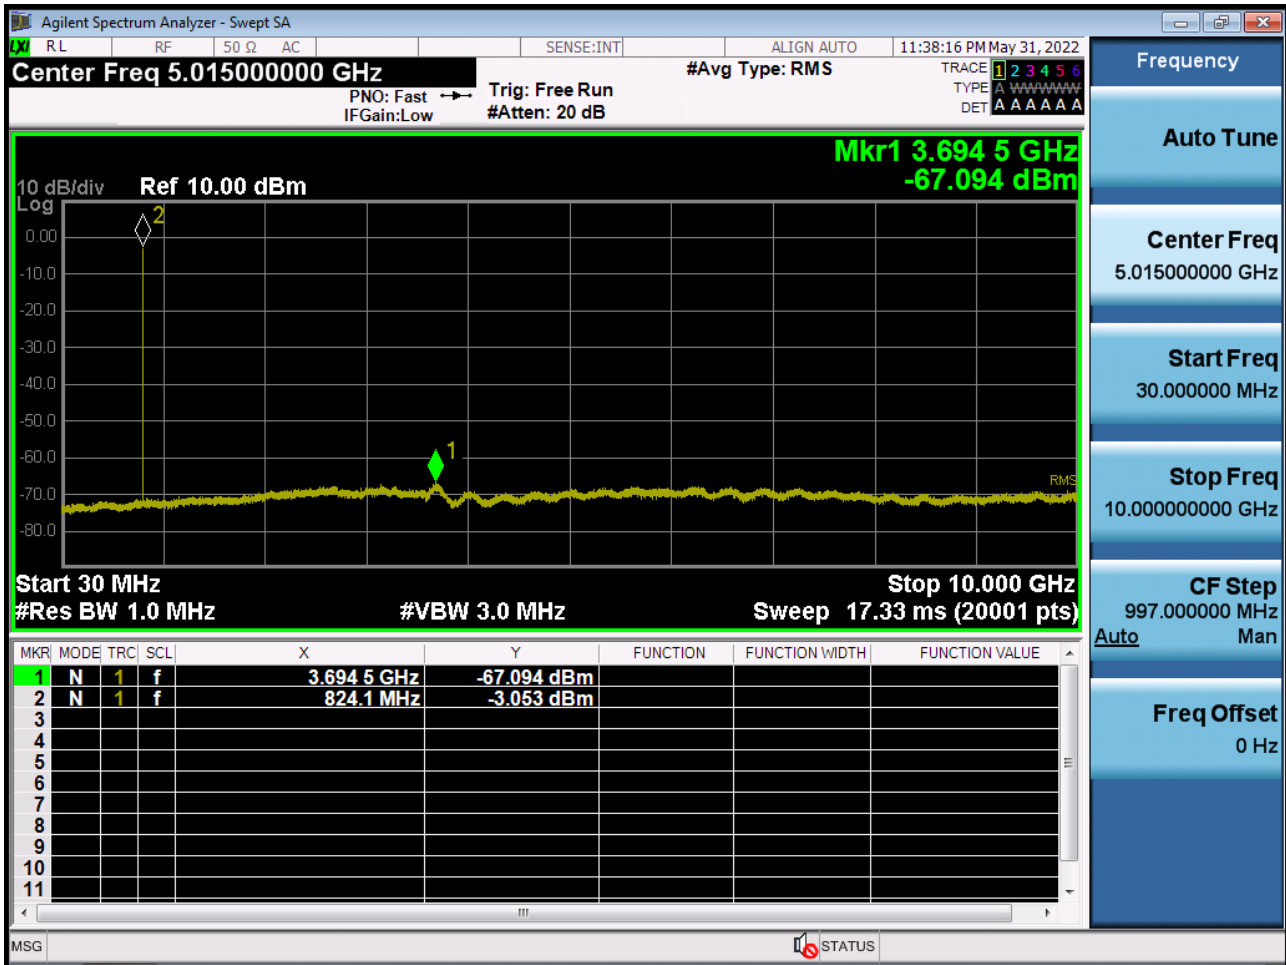

BAND 26. Conducted Spurious (26740 ch_10 MHz_QPSK_RB 1_0)

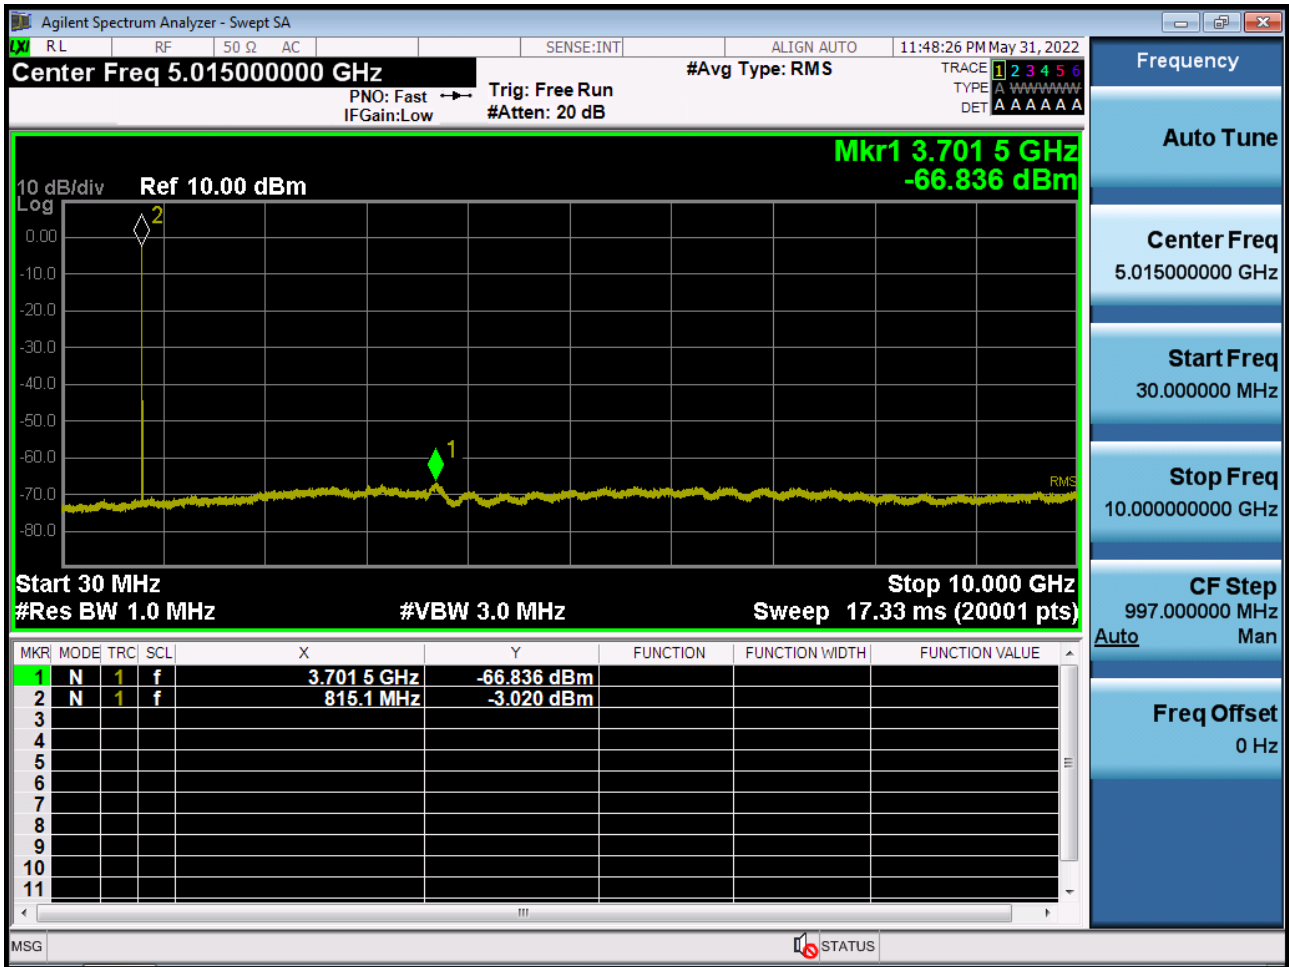


BAND 26. Conducted Spurious (26765 ch_15 MHz_QPSK_RB 1_0)

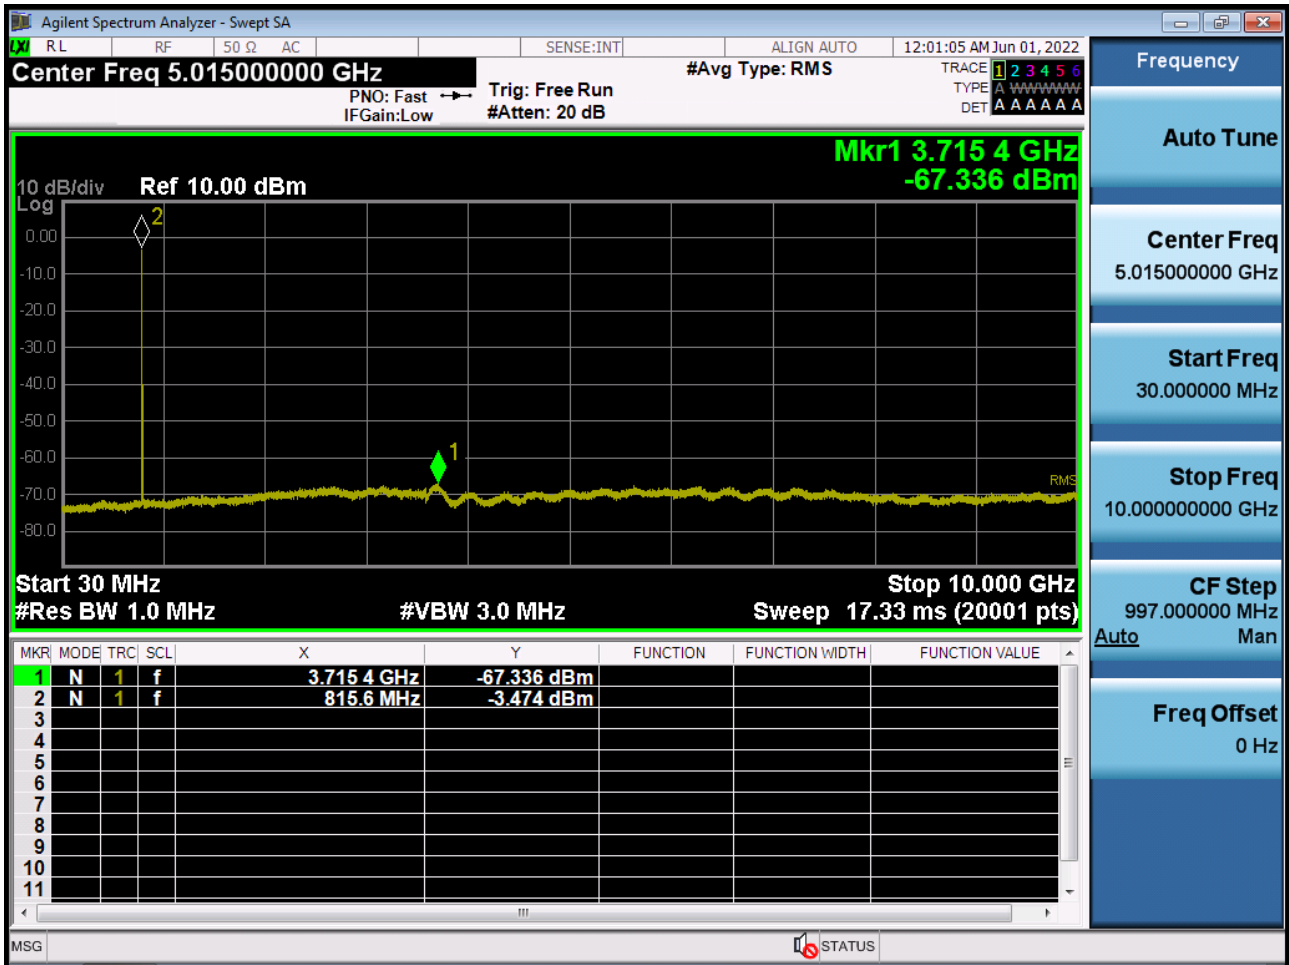


10. TEST PLOTS (STRADDLE CHANNEL)


BAND 26. Conducted Spurious (1.4 MHz_QPSK_RB 1_0)

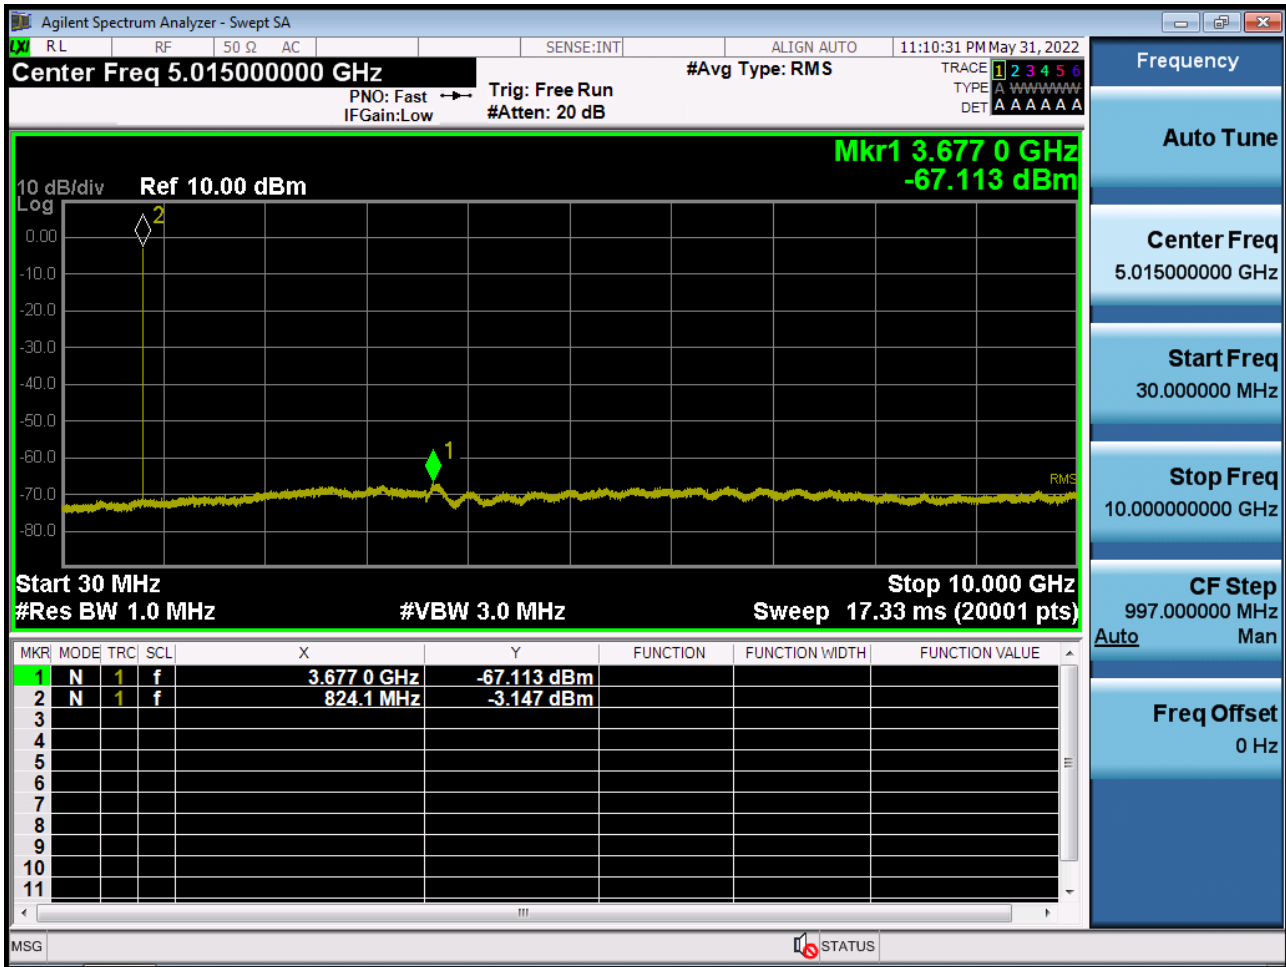


BAND 26. Conducted Spurious (3 MHz_QPSK_RB 1_0)

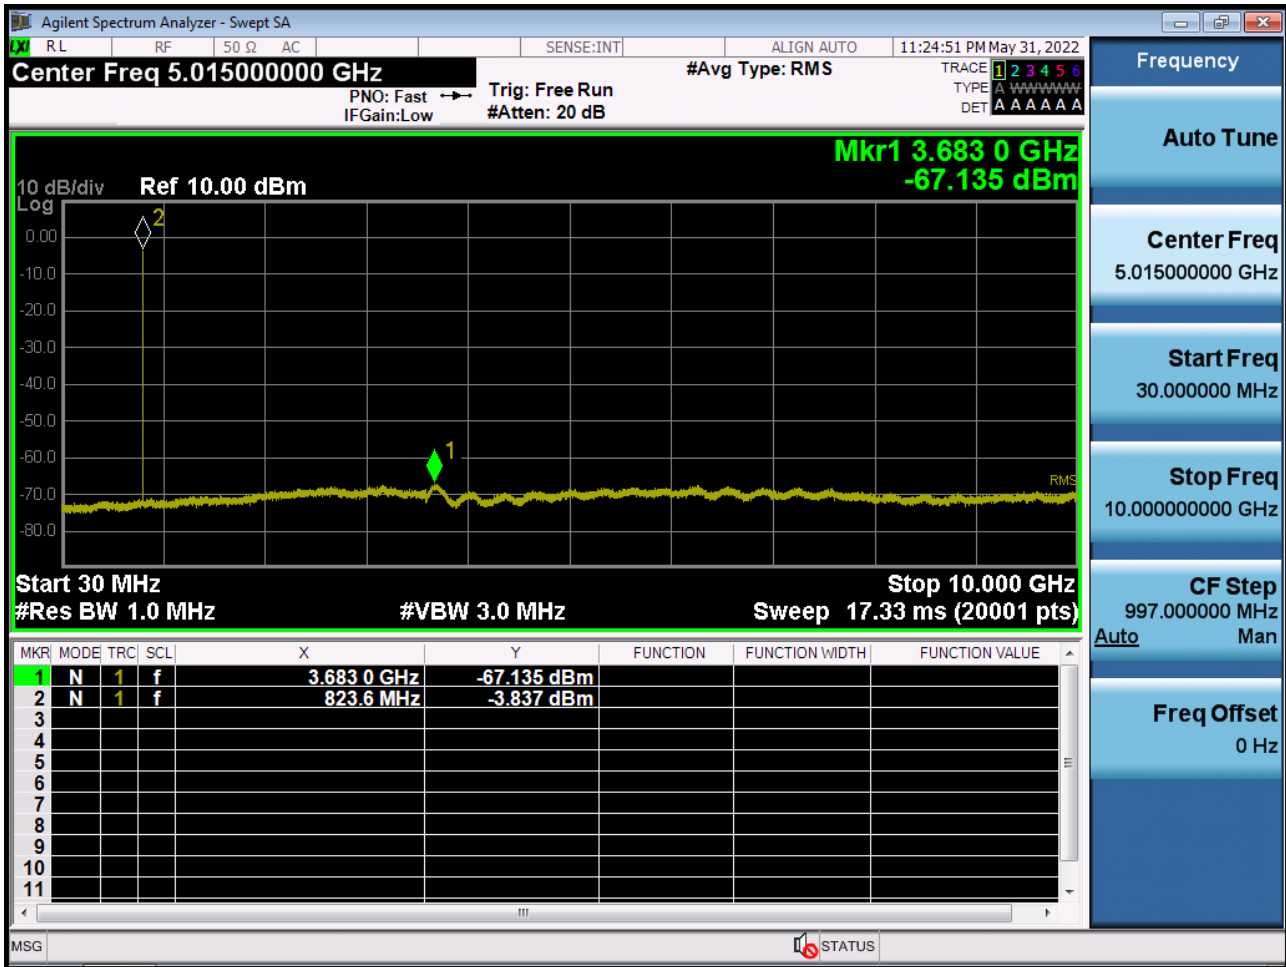


BAND 26. Conducted Spurious (5 MHz_QPSK_RB 1_0)

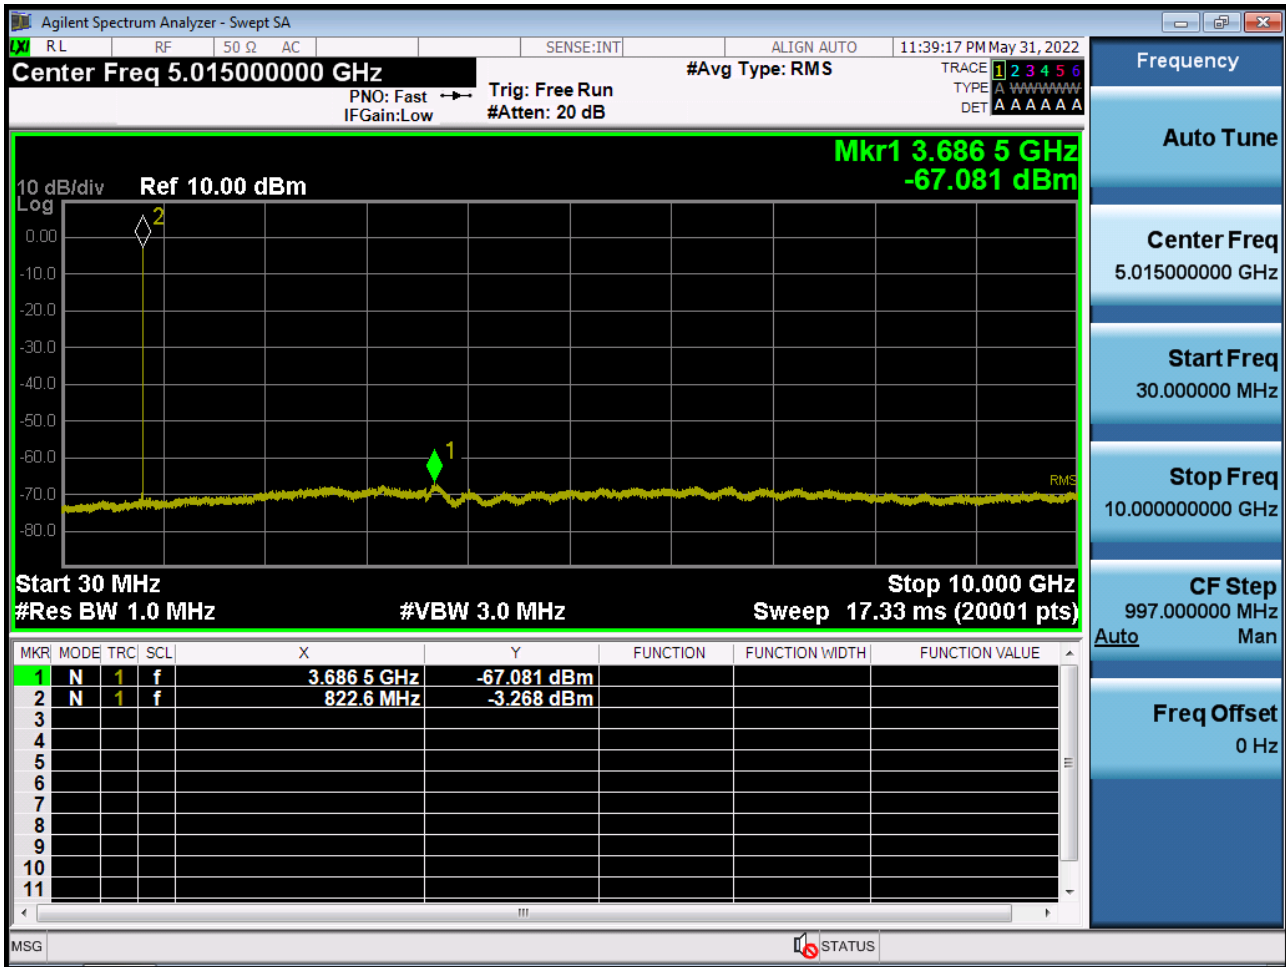


BAND 26. Conducted Spurious (10 MHz_QPSK_RB 1_0)

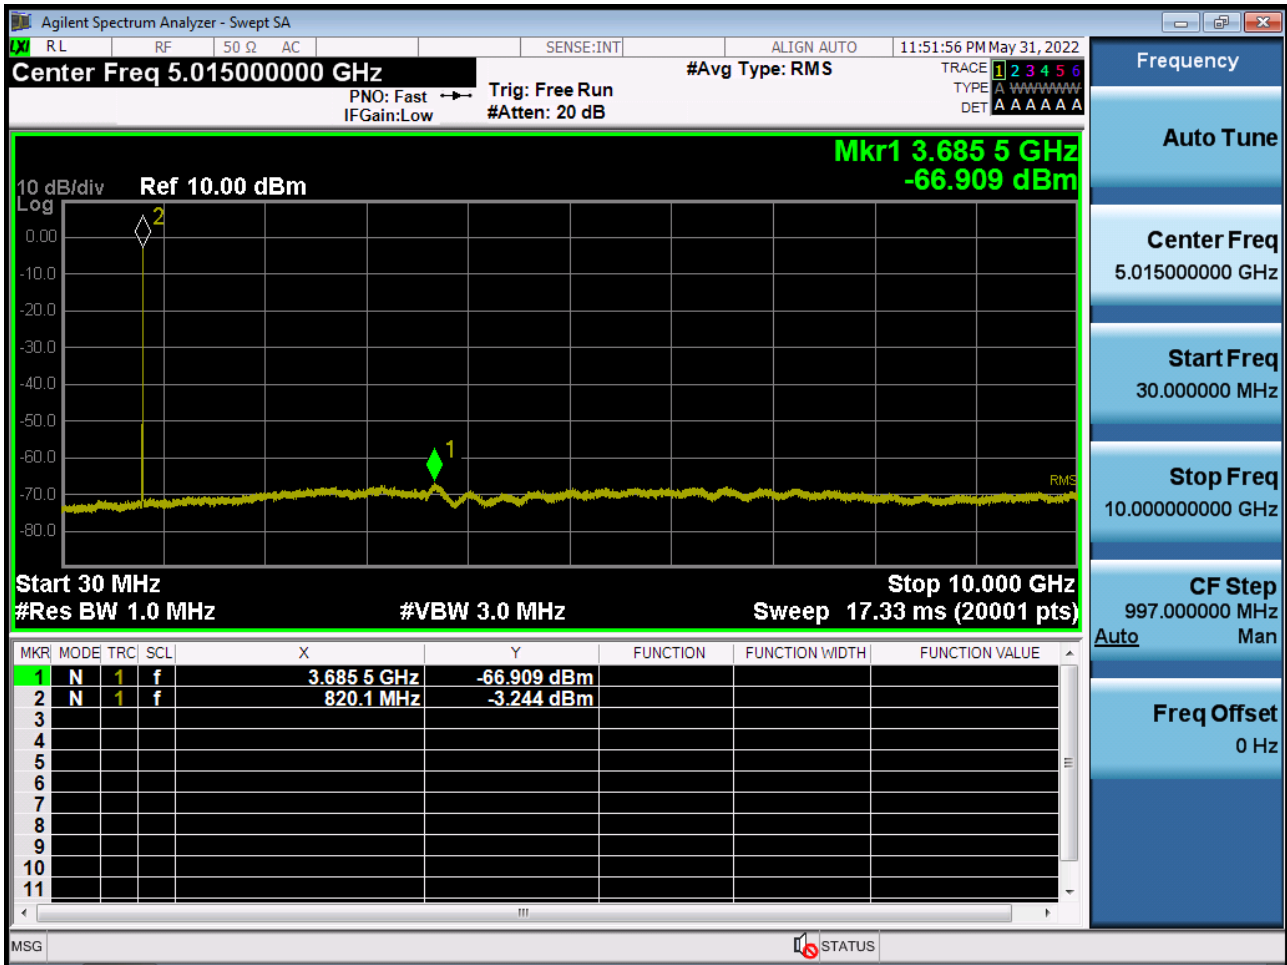


BAND 26. Channel Edge (1.4 MHz_QPSK_RB 1_0)

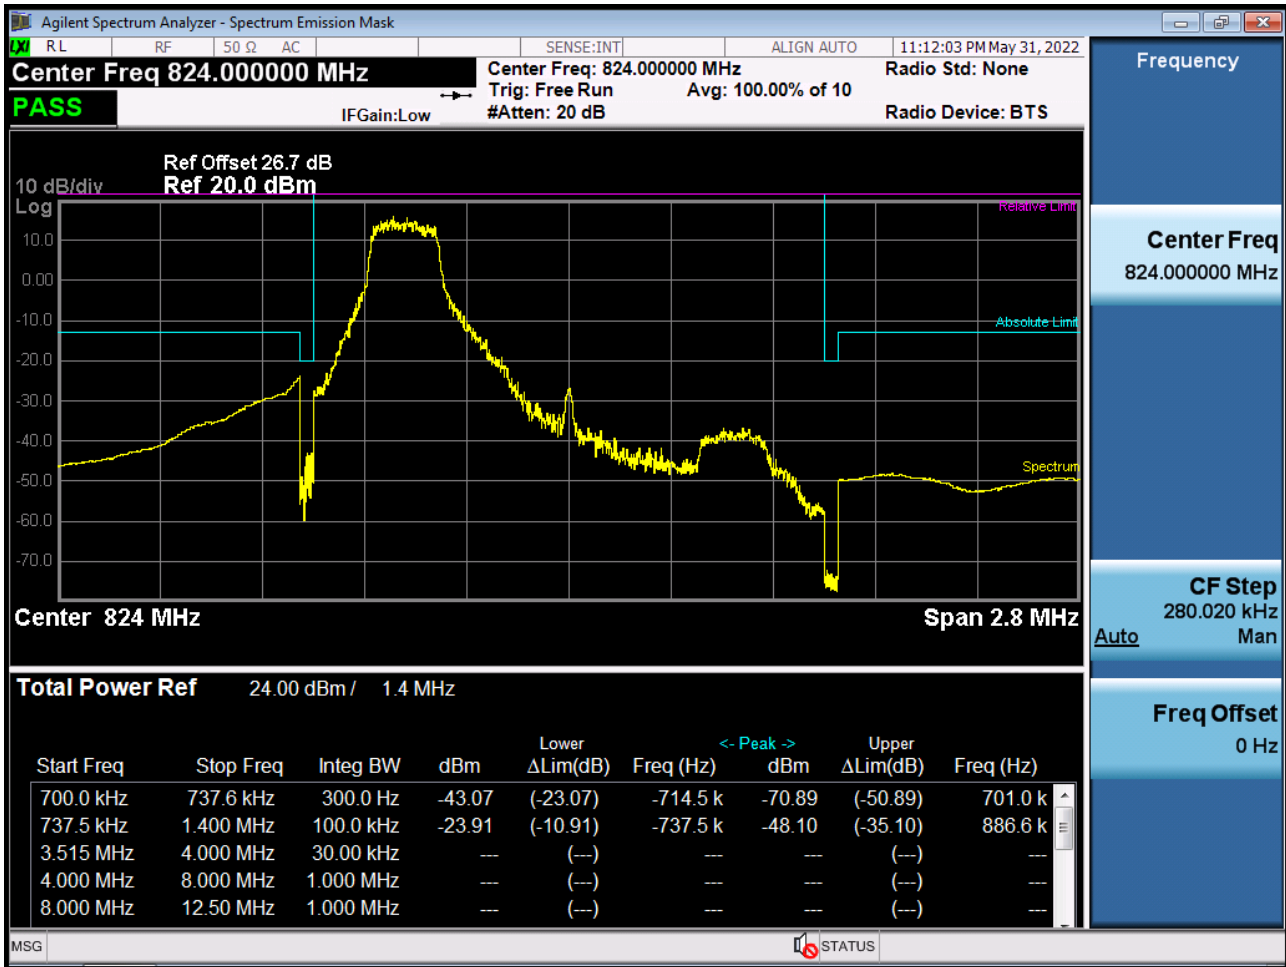


BAND 26. Channel Edge (1.4 MHz_QPSK_RB 1_5)

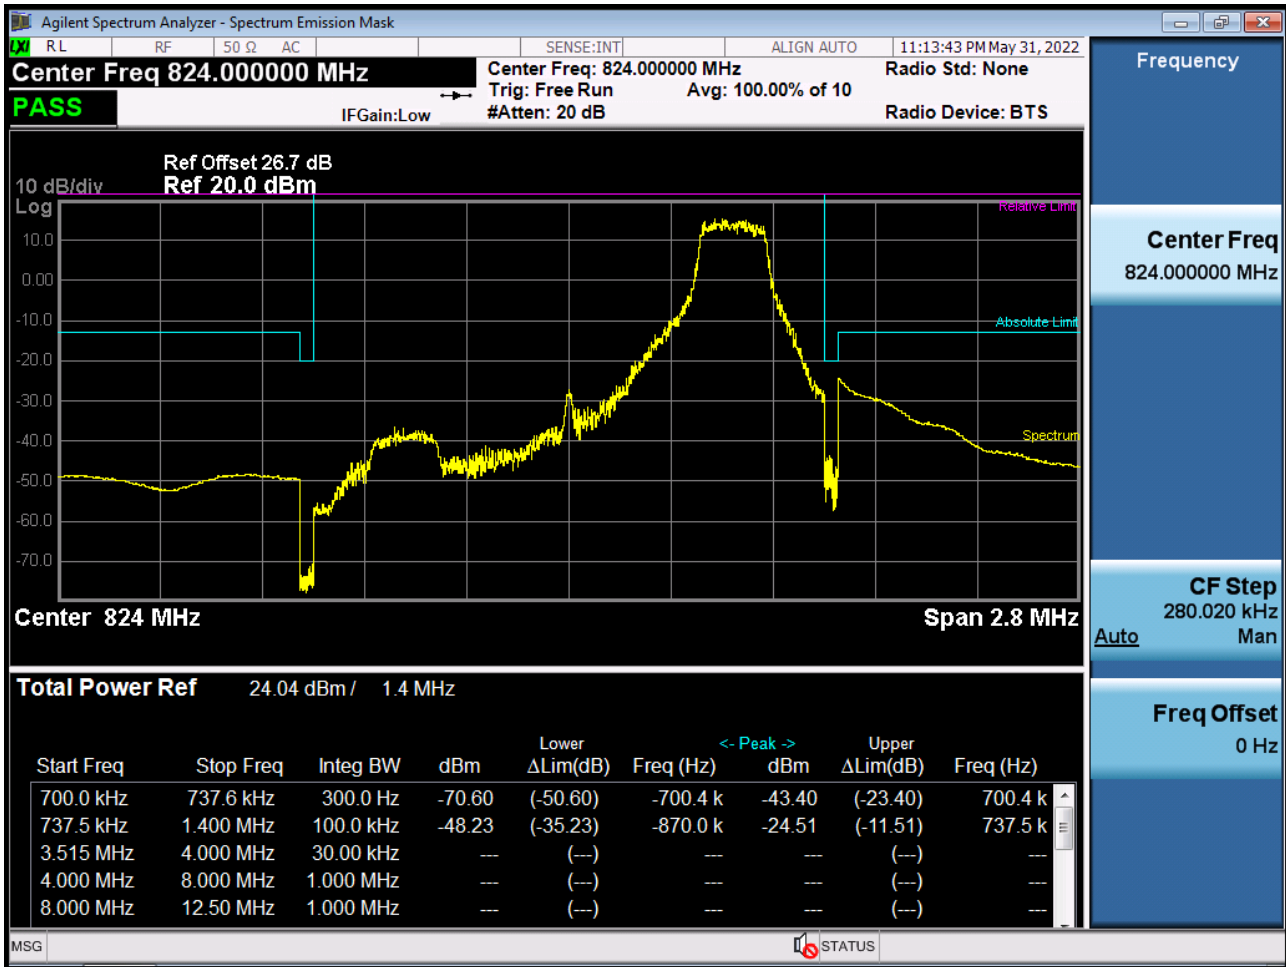


BAND 26. Channel Edge (1.4 MHz_QPSK_Full RB)

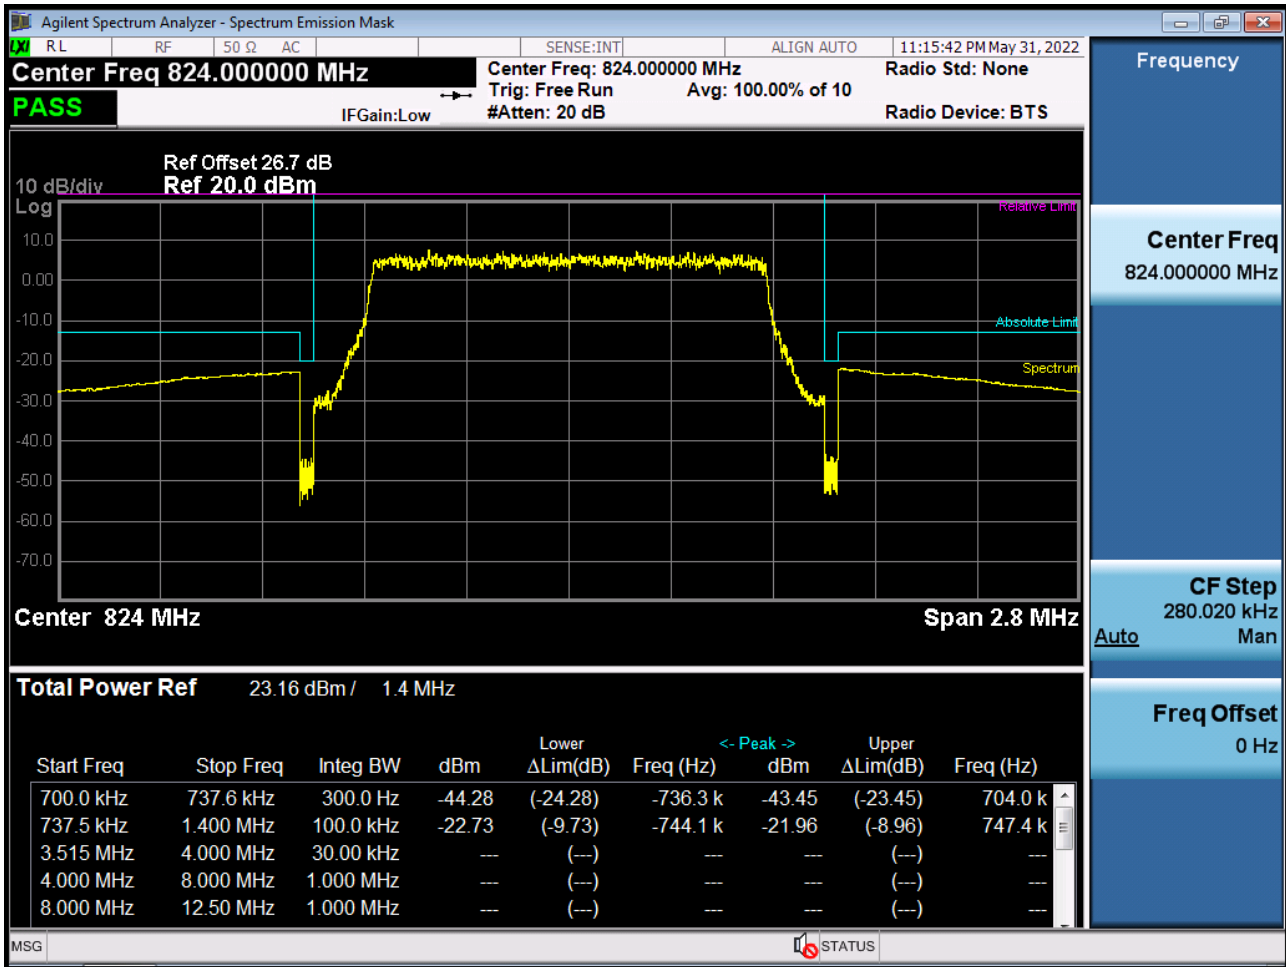


BAND 26. Channel Edge (3 MHz_QPSK_RB 1_0)

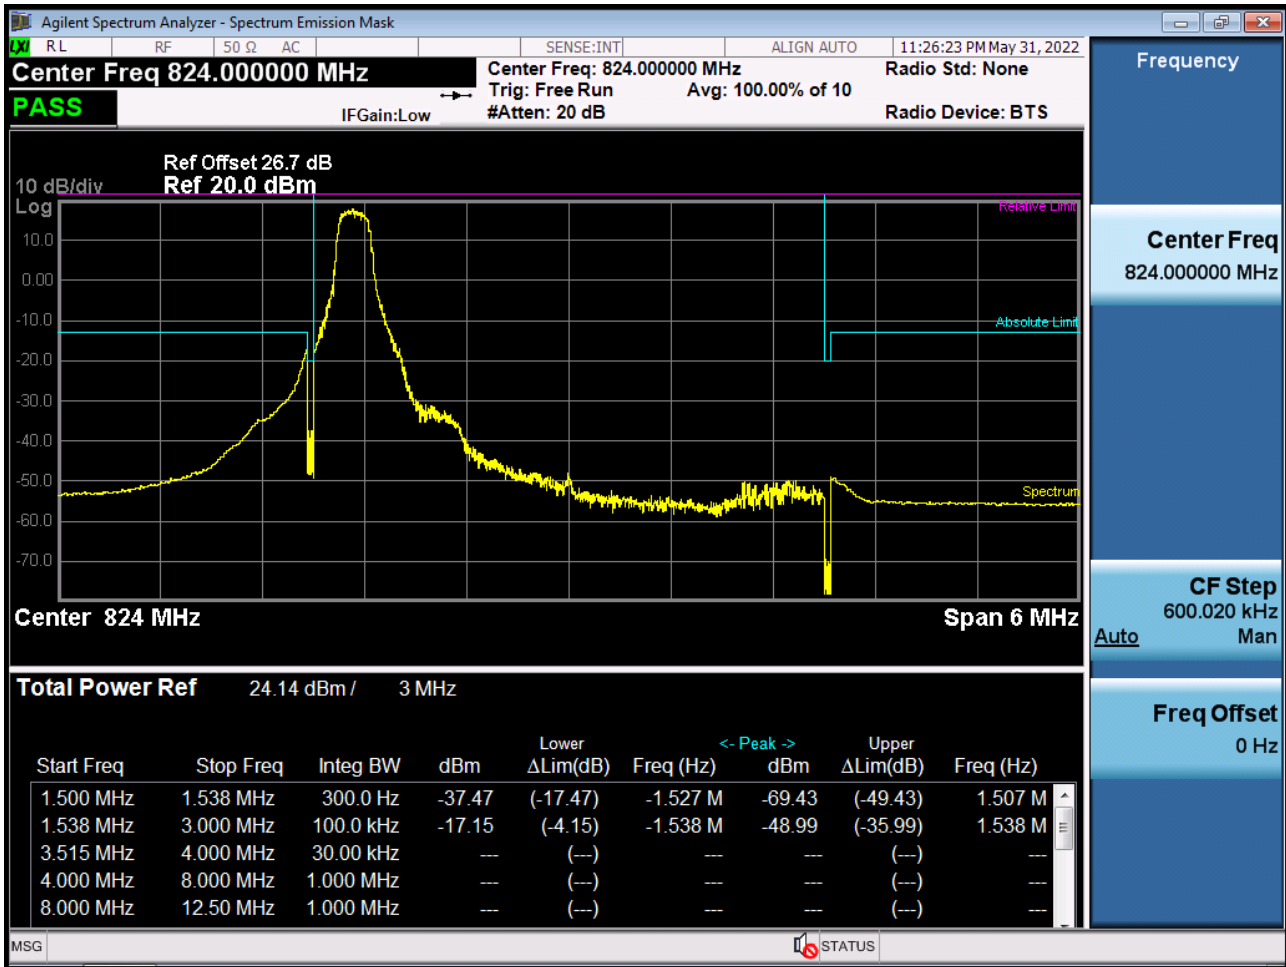


BAND 26. Channel Edge (3 MHz_QPSK_RB 1_14)

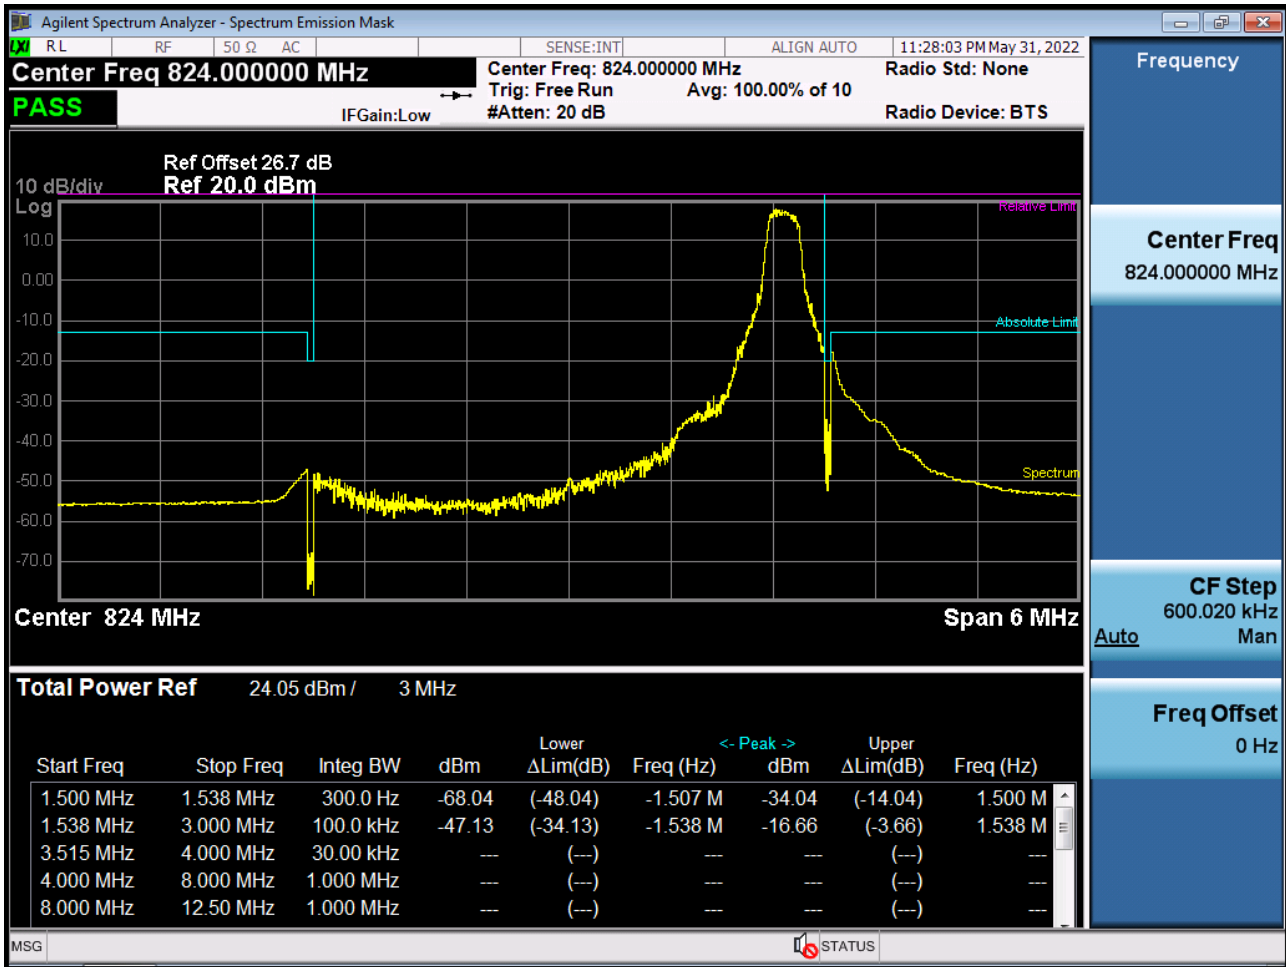


BAND 26. Channel Edge (3 MHz_QPSK_Full RB)

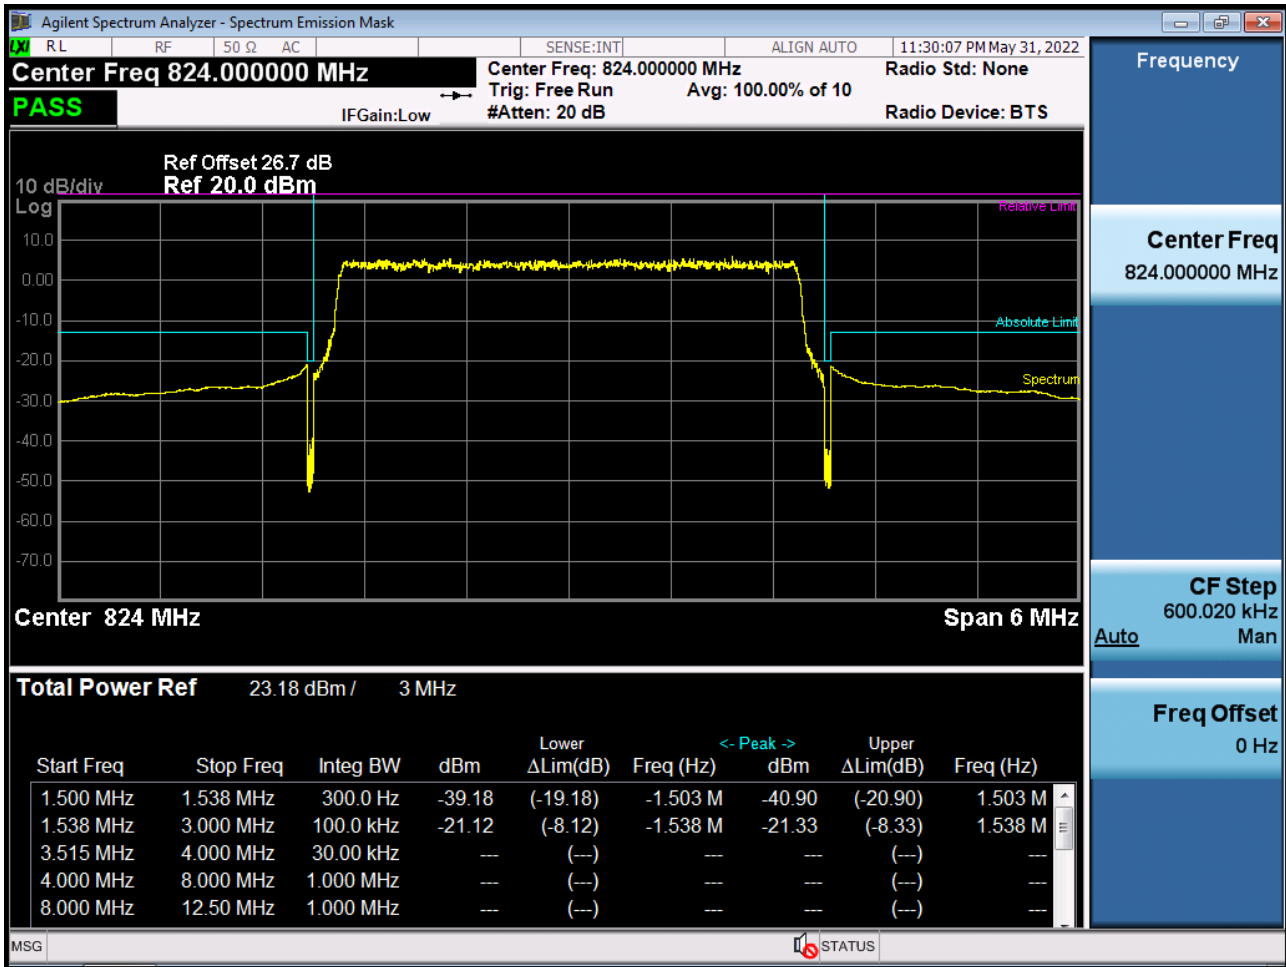


BAND 26. Channel Edge (5 MHz_QPSK_RB 1_0)

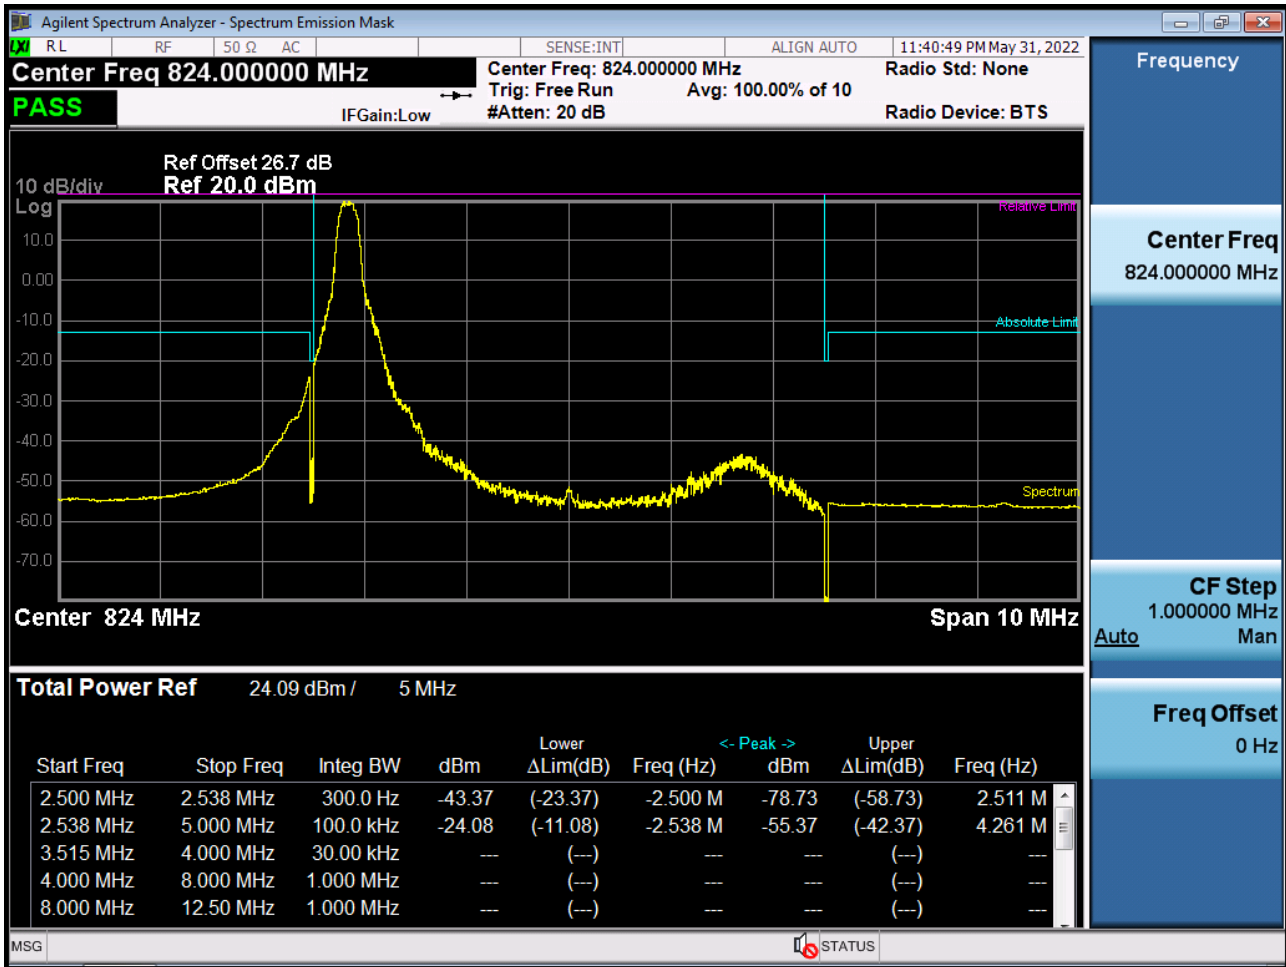


BAND 26. Channel Edge (5 MHz_QPSK_RB 1_24)

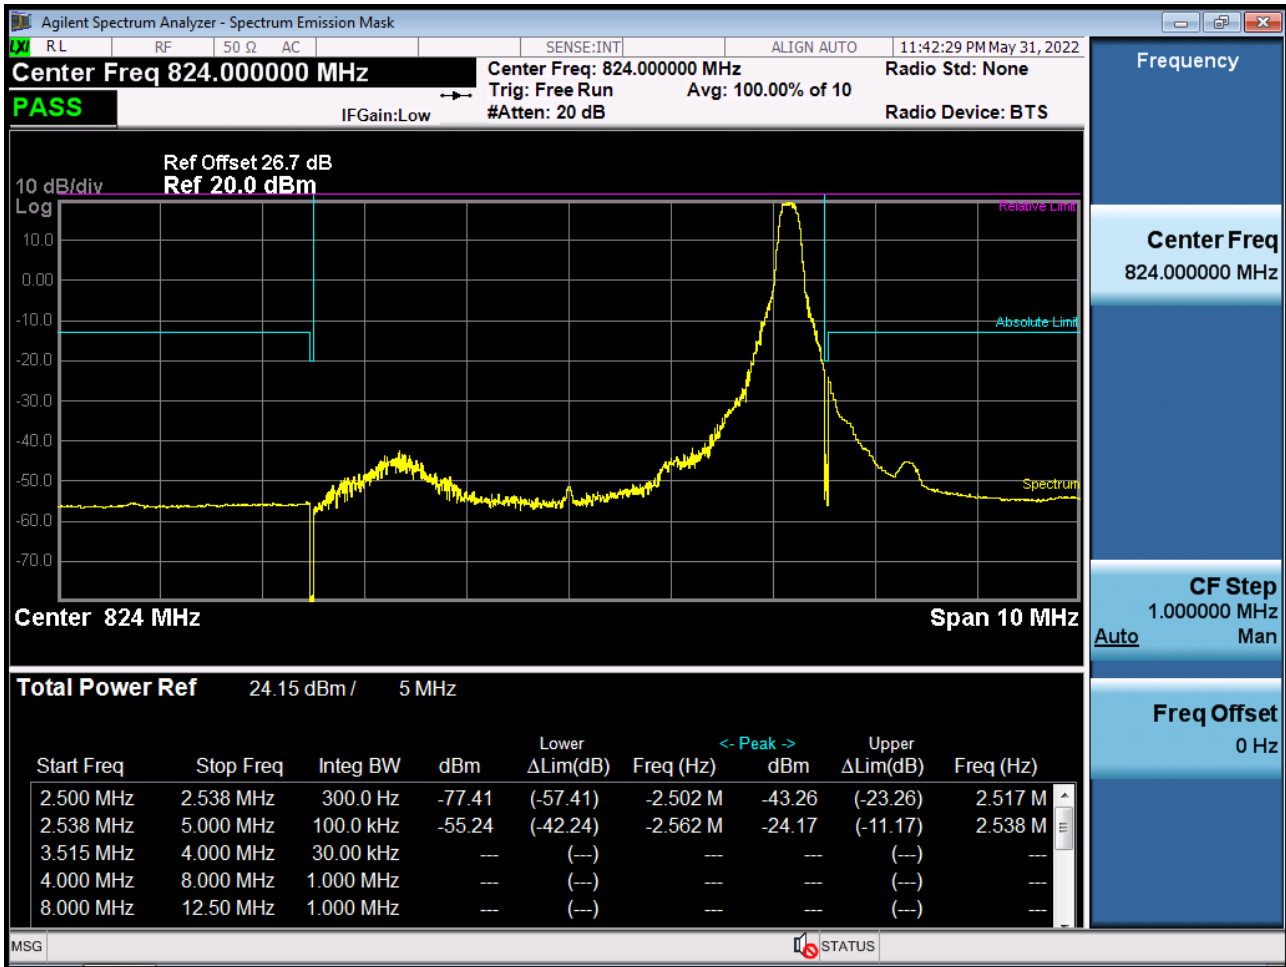


BAND 26. Channel Edge (5 MHz_QPSK_Full RB)

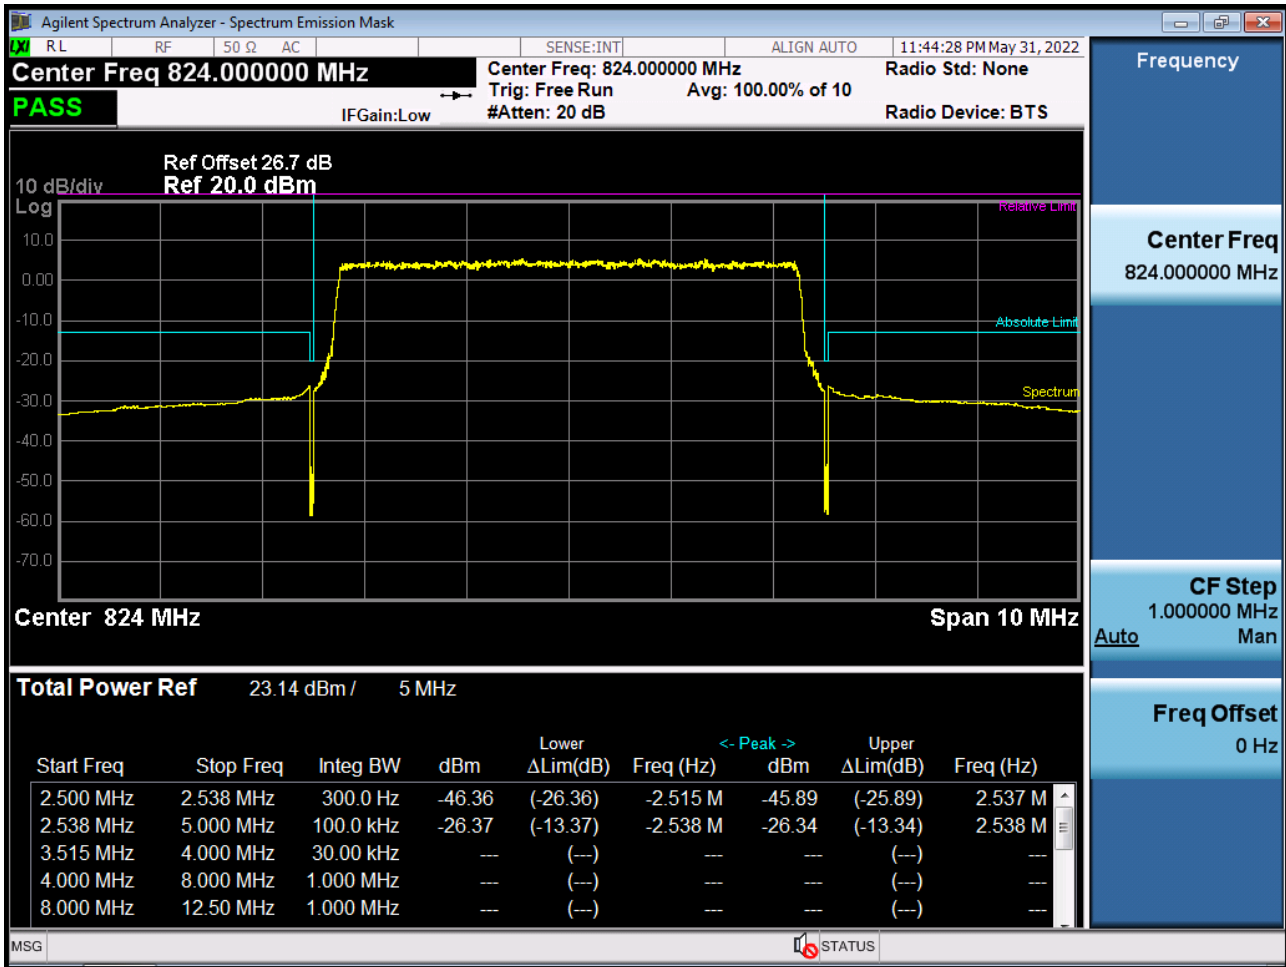


BAND 26. Channel Edge (10 MHz_QPSK_RB 1_0)

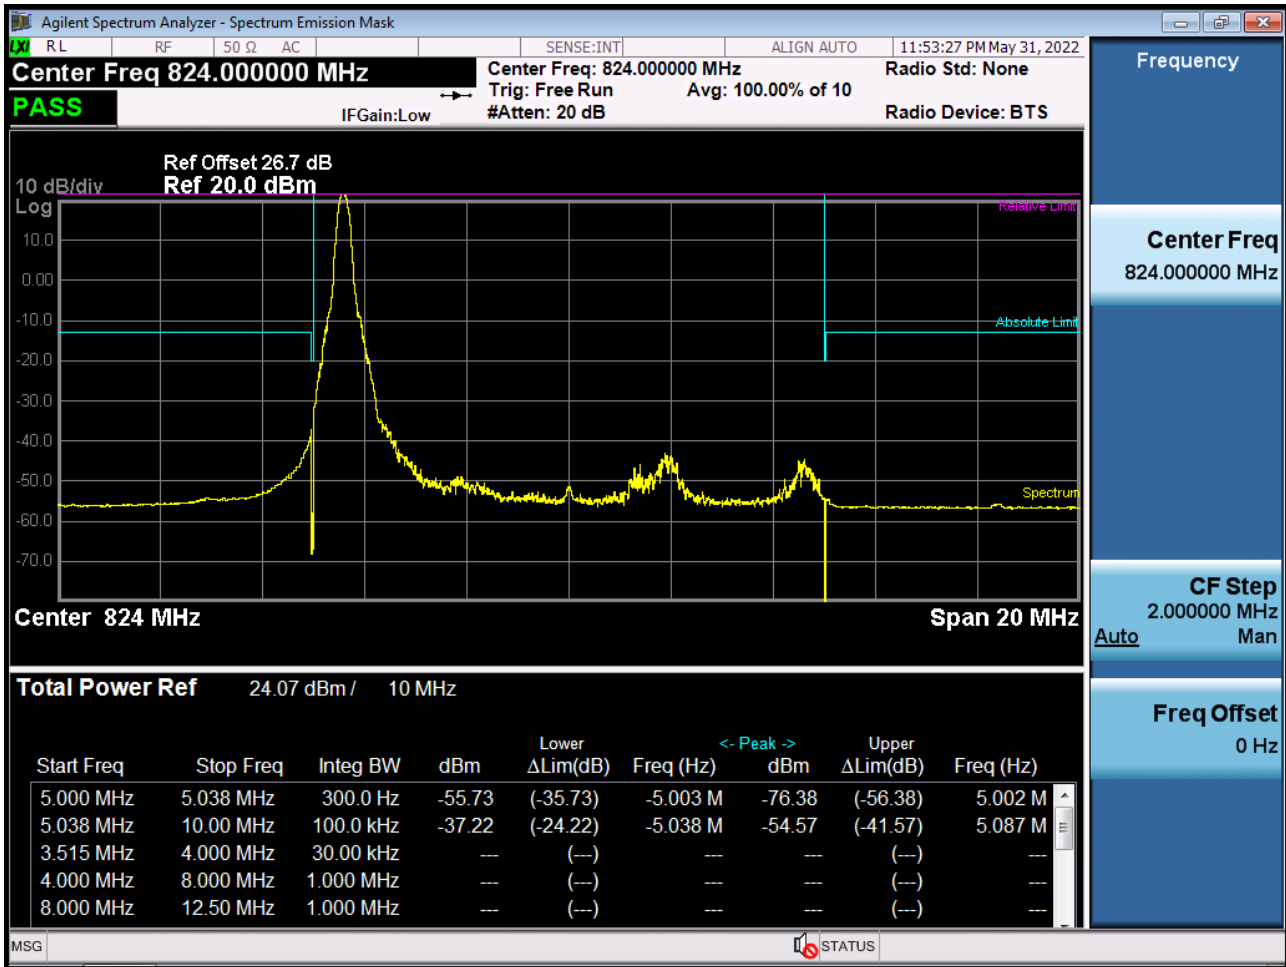


BAND 26. Channel Edge (10 MHz_QPSK_RB 1_49)

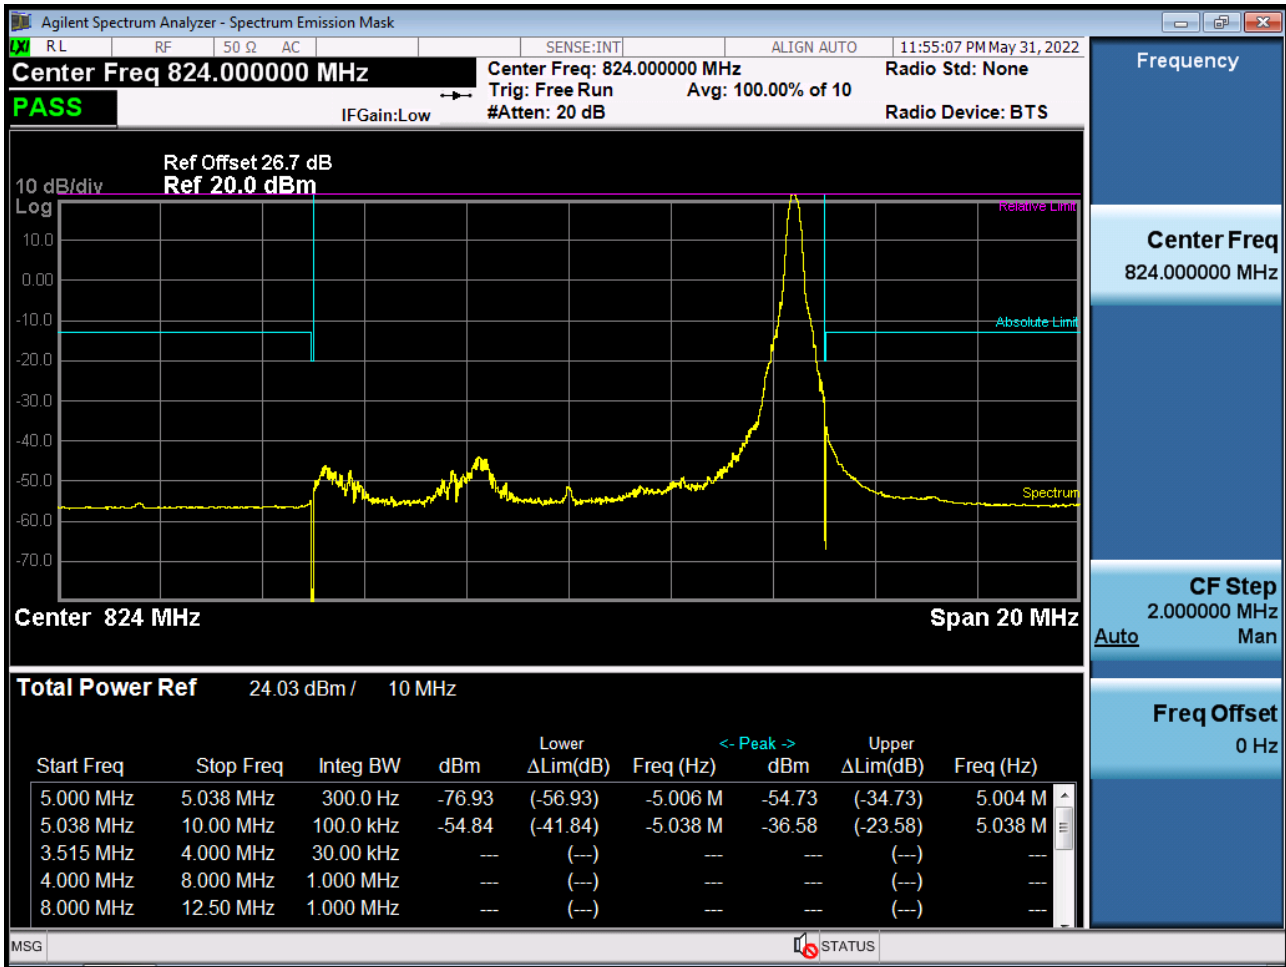


BAND 26. Channel Edge (10 MHz_QPSK_Full RB)

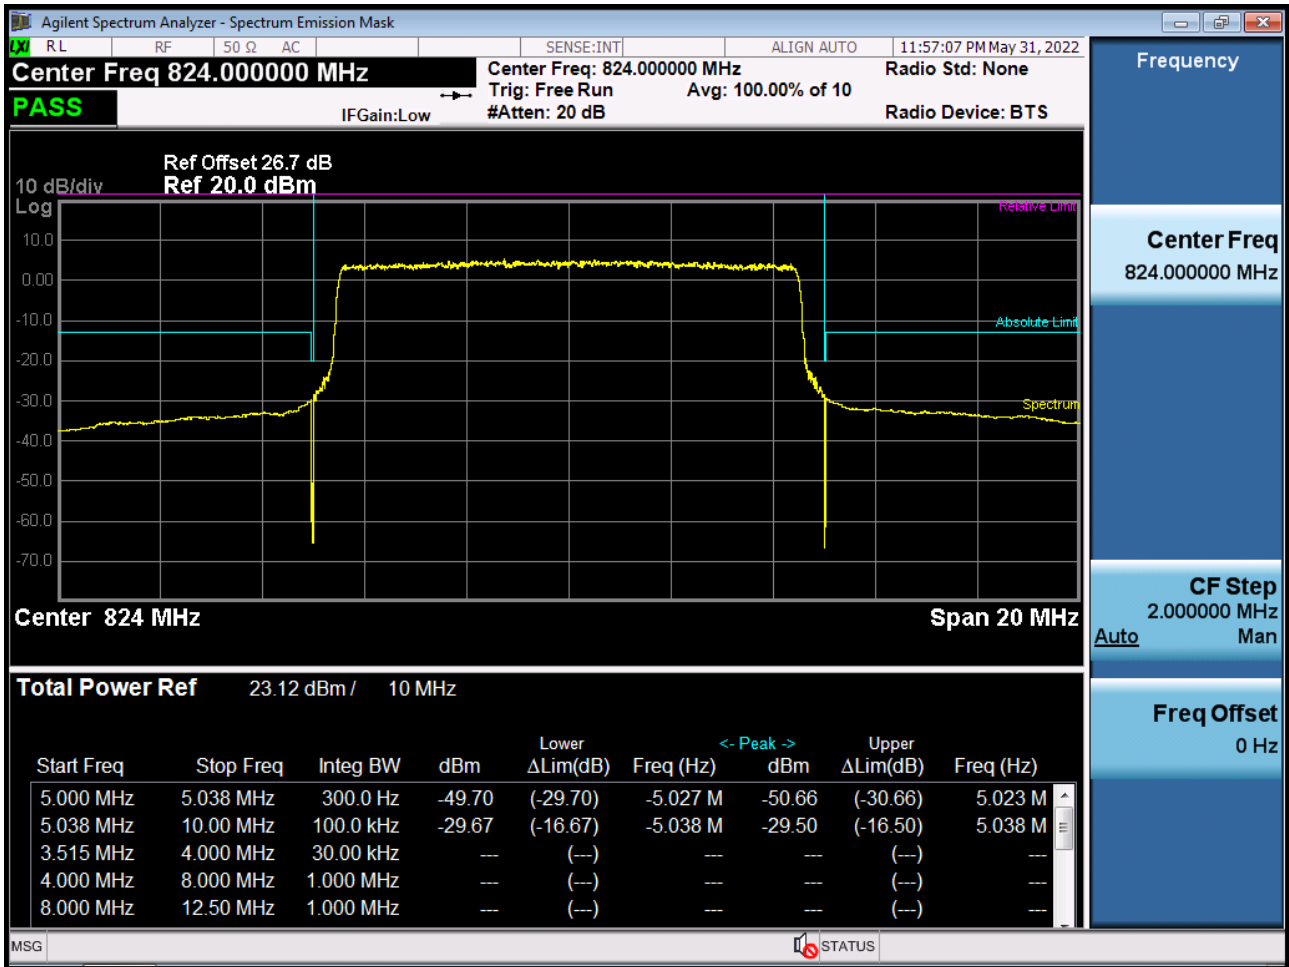


BAND 26. Band Edge (1.4 MHz_QPSK_RB 1_5)

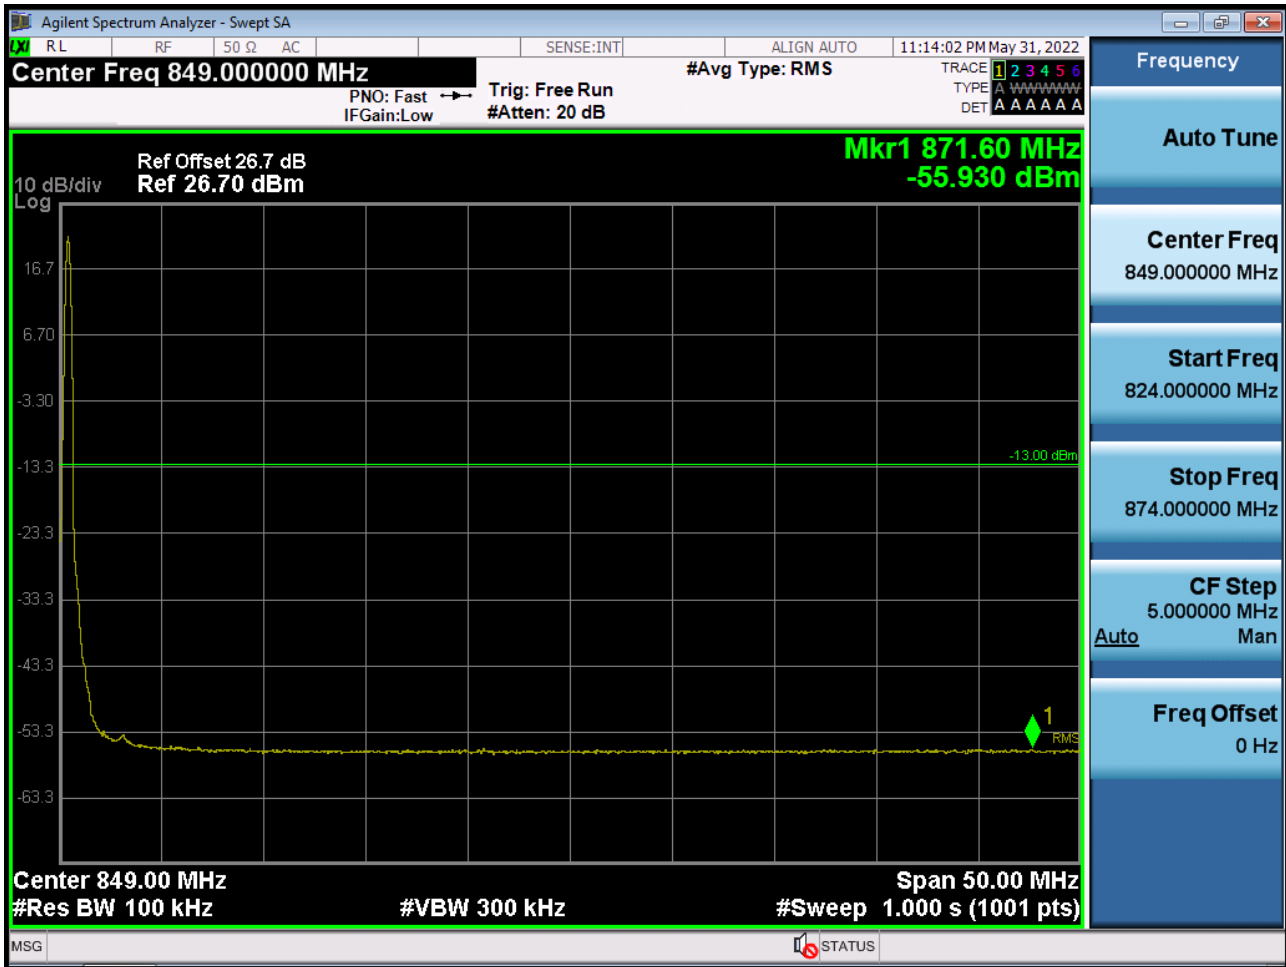

BAND 26. Band Edge (1.4 MHz_QPSK_FullIRB)

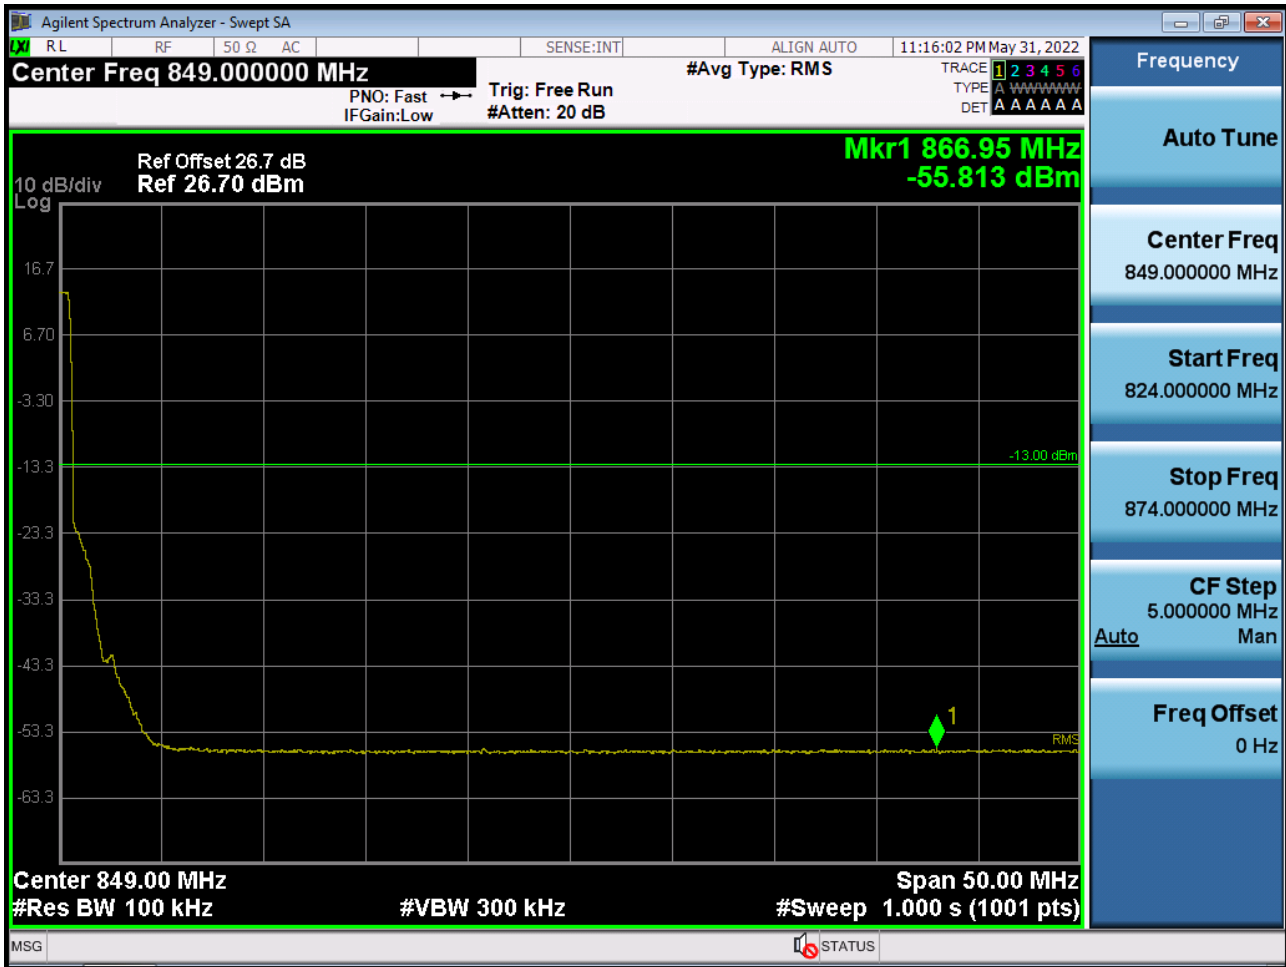


BAND 26. Band Edge (3 MHz_QPSK_RB 1_14)

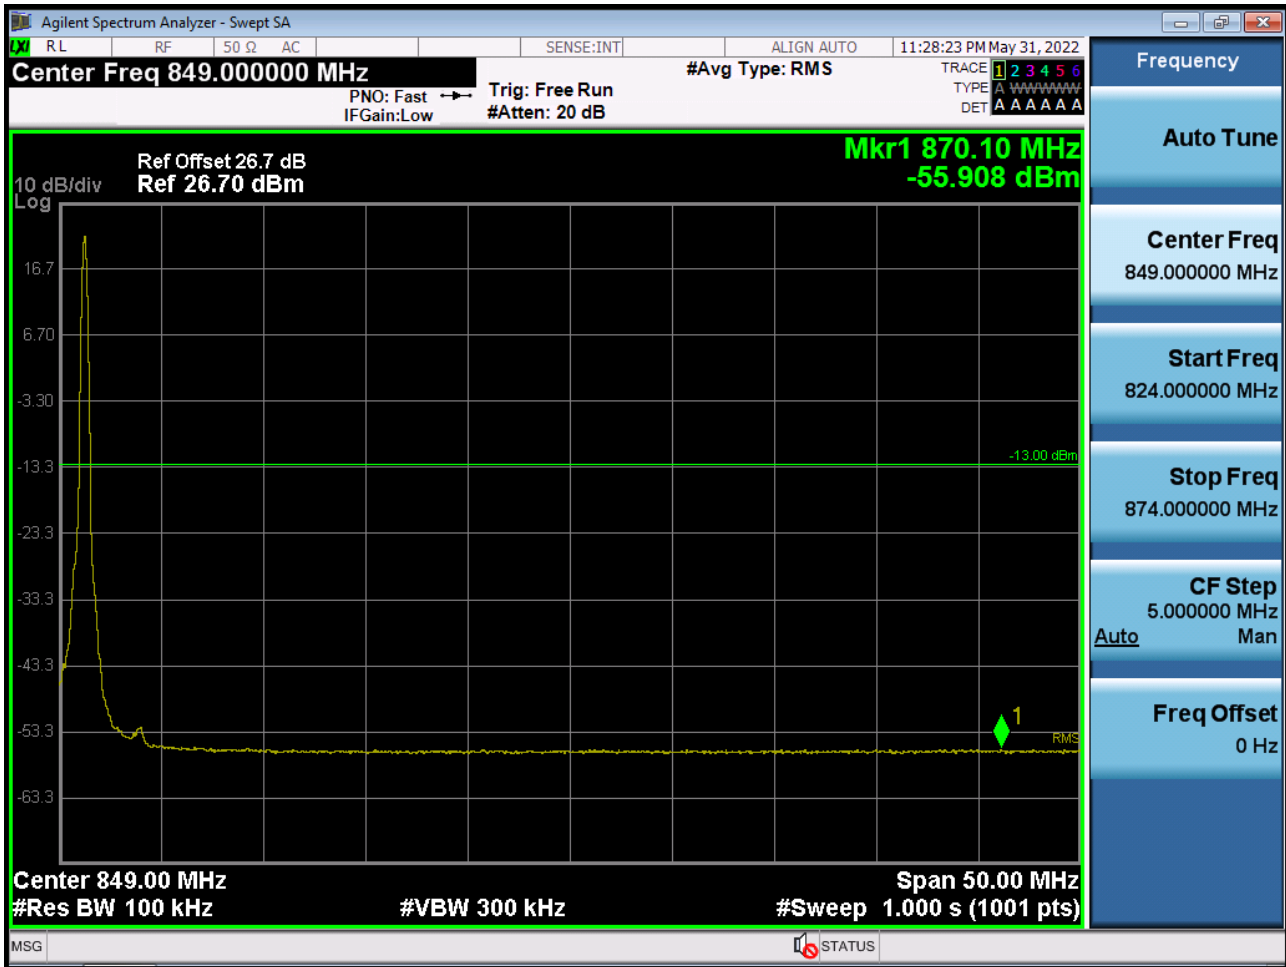

BAND 26. Band Edge (3 MHz_QPSK_ Full RB)



BAND 26. Band Edge (5 MHz_QPSK_RB 1_24)

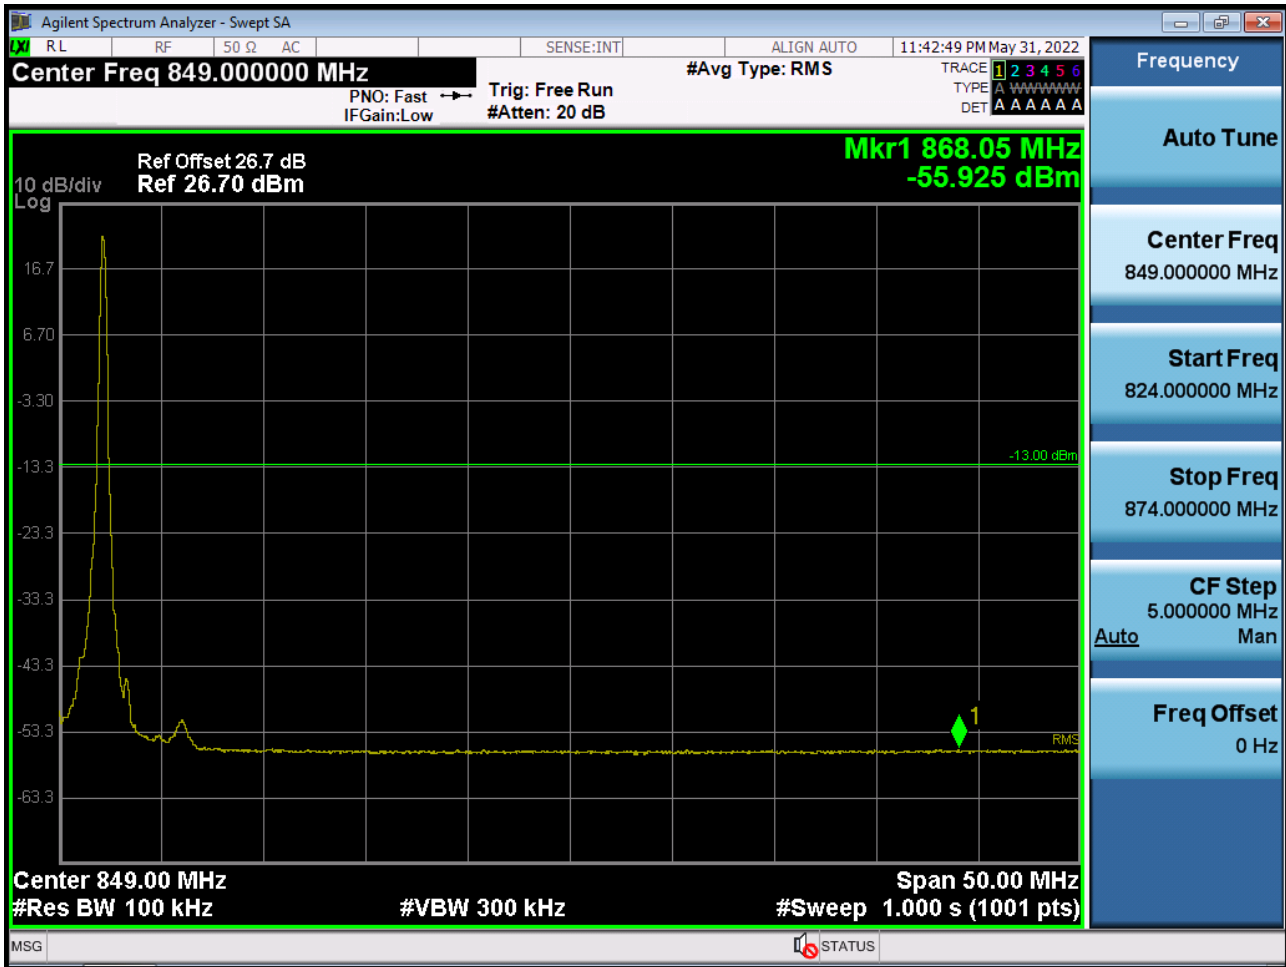

BAND 26. Band Edge (5 MHz_QPSK_ Full RB)



BAND 26. Band Edge (10 MHz_QPSK_RB 1_49)



BAND 26. Band Edge (10 MHz_QPSK_ Full RB)



11 ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

| No. | Description |
|-----|---------------------|
| 1 | HCT-RF-2206-FC020-P |