

FCC DTS REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Date of Issue:
June 15, 2021

Test Site/Location:
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2105-FC040-R1

FCC ID:	A3LSMG990U
----------------	-------------------

APPLICANT:	SAMSUNG Electronics Co., Ltd.
-------------------	--------------------------------------

Model:	SM-G990U
Additional Model:	SM-G990U1/DS, SM-G990U1
EUT Type:	Mobile Phone
Average Output Power:	802.11ax(HE20) SUM (MIMO Ant 1 + MIMO Ant 2): 16.35 dBm
Frequency Range:	2 412 MHz ~ 2 462 MHz
Modulation type:	OFDMA
FCC Classification:	Digital Transmission System(DTS)
FCC Rule Part(s):	Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2105-FC040-R1

REVIEWED BY



Report prepared by : Jeong Ho Kim
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2105-FC040	May 26, 2021	- First Approval Report
HCT-RF-2105-FC040-R1	June 15, 2021	- Added the Additional Model.

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. TEST METHODOLOGY	8
EUT CONFIGURATION	8
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	8
3. INSTRUMENT CALIBRATION.....	9
4. FACILITIES AND ACCREDITATIONS	9
FACILITIES	9
EQUIPMENT	9
5. ANTENNA REQUIREMENTS	10
6. MEASUREMENT UNCERTAINTY	10
7. DESCRIPTION OF TESTS.....	11
8. SUMMARY TEST OF RESULTS	28
9. TEST RESULT	29
9.1 DUTY CYCLE.....	29
9.2 6dB BANDWIDTH.....	32
9.3 OUTPUT POWER	35
9.4 POWER SPECTRAL DENSITY	37
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	40
9.6 RADIATED SPURIOUS EMISSIONS	45
9.7 RADIATED RESTRICTED BAND EDGES	56
10. LIST OF TEST EQUIPMENT	62
11. ANNEX A_ TEST SETUP PHOTO	64

1. EUT DESCRIPTION

Model	SM-G990U	
Additional Model	SM-G990U1/DS, SM-G990U1	
EUT Type	Mobile Phone	
Power Supply	DC 3.88 V	
Frequency Range	2 412 MHz ~ 2 462 MHz	
Max. RF Output Power SUM (MIMO Ant 1 + MIMO Ant 2)	<u>Peak Power</u> (For information only)	24.49 dBm
	<u>Average Power</u>	16.35 dBm
Modulation Type	OFDMA	
Number of Channels	11 Channels	
Date(s) of Tests	April 01, 2021 ~ May 26, 2021	
Serial number	Radiated: UDE0597M Conducted: UDJ0410M	

ANTENNA CONFIGURATIONS

1. The device employs MIMO technology. Below are the possible configurations

Configurations	SISO		SDM	CDD
	Ant1	Ant2	Ant1 + Ant2	Ant1 + Ant2
802.11ax(HE20)	X	X	O	O

Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz WiFi	2.4 GHz WiFi	5GHz WiFi	5GHz WiFi
	Ant.1	Ant.2	Ant.1	Ant.2
2.4 GHz WiFi + 5GHz WiFi MIMO	On		On	On
2.4 GHz WiFi + 5GHz WiFi MIMO		On	On	On
2.4 GHz WiFi MIMO + 5GHz WiFi MIMO	On	On	On	On

Non-DBS	5GHz WiFi	5GHz WiFi	Bluetooth
	Ant.1	Ant.2	Ant.1
5GHz WiFi MIMO + Bluetooth	On	On	On

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) f) (ii)

Directional gain =

$$\bullet \quad \text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Ant Gain (dBi)		N _{ANT} / N _{ss}	Directional Gain (dBi)
Ant.1	-4.6		
Ant.2	-8.5	SDM : -4.60	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

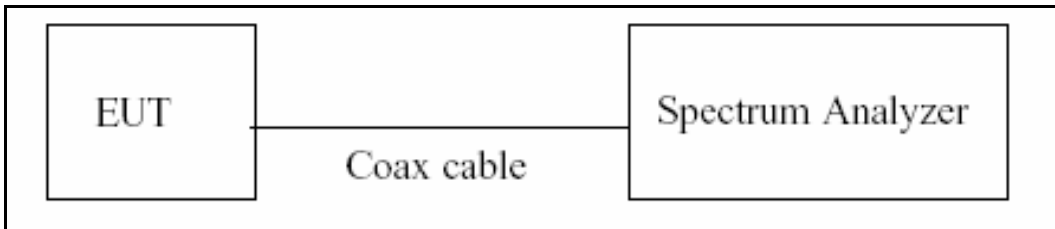

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration

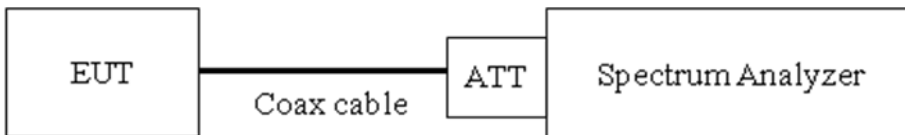

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration

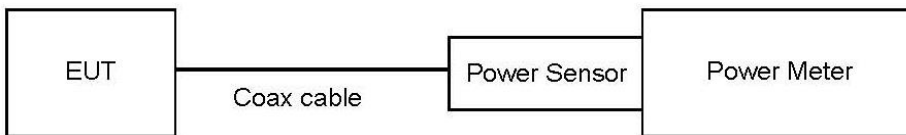

Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3kHz BW.

Test Configuration

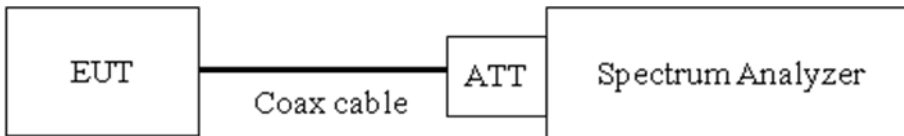

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98%

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration

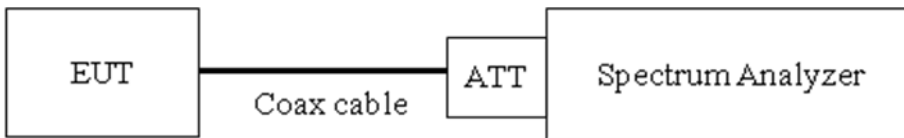

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.04
100	20.09
200	20.13
300	20.19
400	20.22
500	20.23
600	20.23
700	20.25
800	20.27
900	20.29
1000	20.31
2000	20.46
2400	20.52
2480	20.52
2500	20.52
3000	20.57
4000	20.67
5000	20.75
5150	20.77
5850	20.82
6000	20.82
7000	20.91
8000	20.98
9000	21.05
10000	21.12
11000	21.16
12000	21.24
13000	21.32
14000	21.30
15000	21.32
16000	21.37
17000	21.41
18000	21.47
19000	21.50
20000	21.56
21000	21.77
22000	21.74
23000	21.94
24000	21.77
25000	21.80
26000	21.80

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(20dB) + Cable loss (1ea)


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

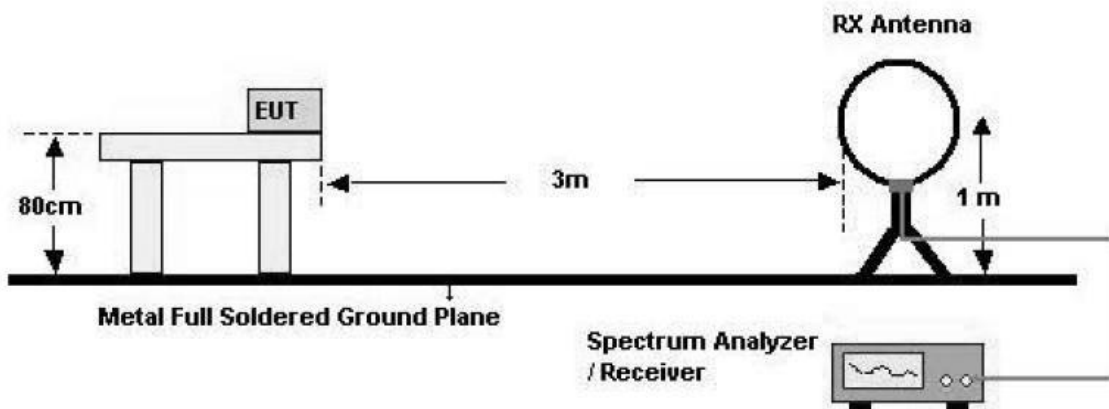

30 MHz - 1 GHz

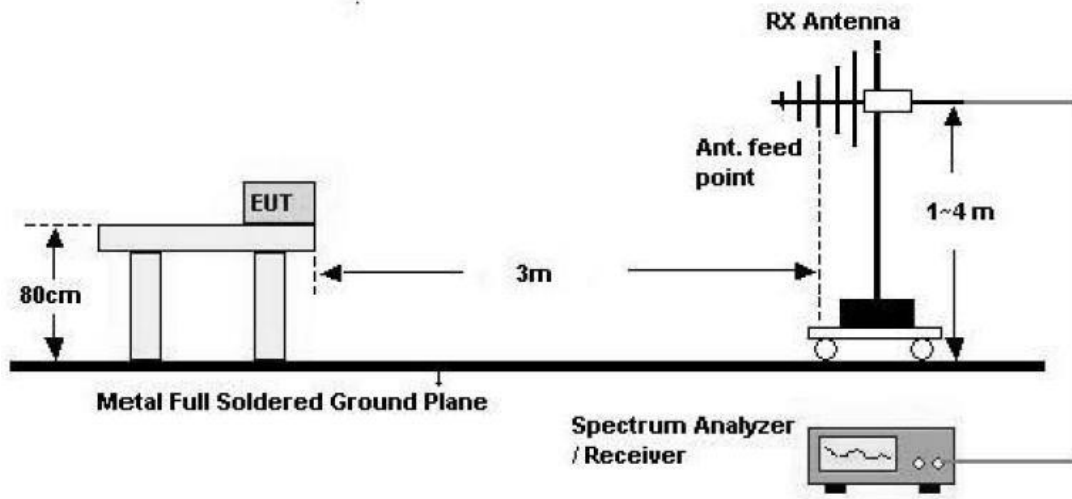

Above 1 GHz

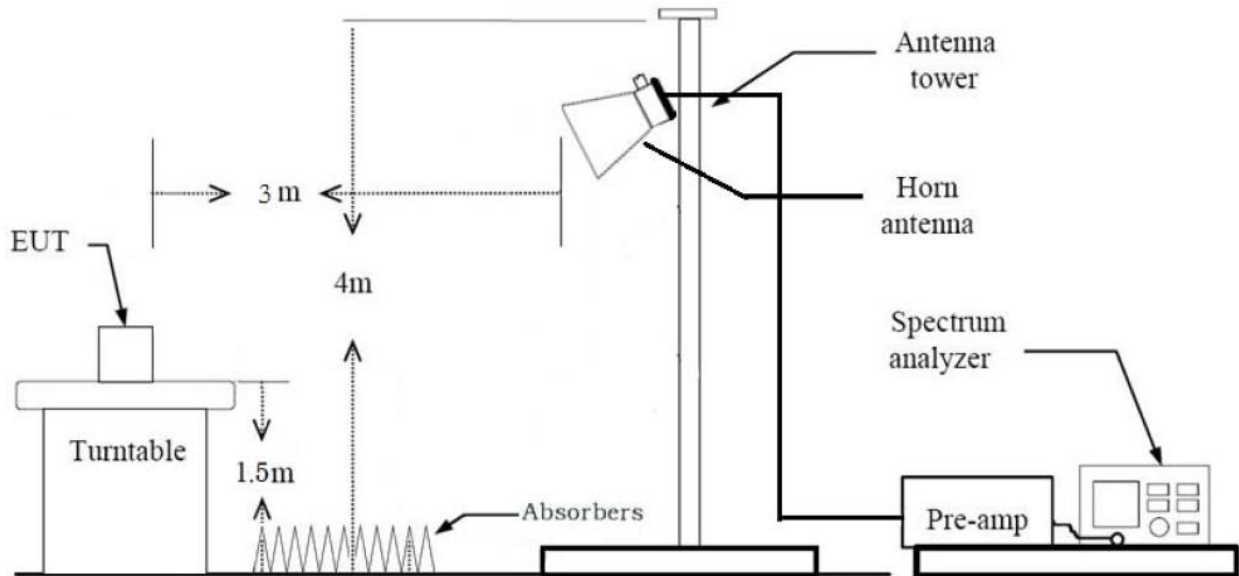

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
- ※ In general, (1) is used mainly
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak

- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

11. Total(Measurement Type : Peak)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $< 98\%$)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)} \\ + \text{Duty Cycle Factor}$$

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98%,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle \geq 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Test RU offset for Tones

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	26	0~8	0	4	8
	52	37~40	37	38	40
	106	53~54	53	-	54
	242	61	-	61	-

7.9. Worst case configuration and mode

Conducted test

1. All data rate of operation were investigated and the worst case results are reported.

(Worst case : MCS0)

2. Bandedge (Conducted)

: All Mode(Channel, Tone, RU Offset) of operation were investigated and the worst case configuration results are reported

Tone	Channel	RU Index
26	1, 11	0, 8
52	1, 11	37, 40
106	1, 11	53, 54
242	1, 11	61

3. SM-G990U, SM-G990U1/DS, SM-G990U1 were tested and the worst case results are reported.

(Worst case : SM-G990U)

Radiated test

1. Full RU(Resource Unit) mode and SU(Single Unit) mode have no difference in physical waveform.

This Report has been described only Full RU(Resource Unit) mode with worst output power

2. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone + External accessories(Earphone, etc)

- Worstcase : Stand alone

3. EUT Axis

- Radiated Spurious Emissions : Y

- Radiated Restricted Band Edge : X

4. All data rate of operation were investigated and the worst case results are reported.

(Worst case : MCS0)

5. All Antenna of operation were investigated and the worst case results are reported

- Mode : Ant1+Ant2(SDM), Ant1+Ant2(CDD)

- Worstcase : Ant1+Ant2(CDD)

6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.

- Position : Horizontal, Vertical, Parallel to the ground plane

7. All mode(Tone, RU Offset) of operation were investigated and the worst case configuration results are reported

Test	Tone	RU Offset
RSE	Worst case : 26 T	RU 4
	Additional Tone : 52, 106, 242 T	52 T : ch 1 (RU 38), ch 6 (RU 40), ch 11 (RU 38) 106 T : ch 1 (RU 54), ch 6 (RU 54), ch 11 (RU 53) 106 T : RU 61
Bandedge	Worst case : 242 T	61
	Additional Tone : 26, 52, 106 T, SU	Low Edge: 0, 37, 53 High Edge: 8, 40, 54

8. SM-G990U, SM-G990U1/DS, SM-G990U1 were tested and the worst case results are reported.
(Worst case : SM-G990U)

Radiated test(DBS)

1. Please refer to the SM-G990U[DTS] Test Report.
2. SM-G990U, SM-G990U1/DS, SM-G990U1 were tested and the worst case results are reported.
(Worst case : SM-G990U)

AC Power line Conducted Emissions

1. Please refer to the SM-G990U[DTS] Test Report.
2. SM-G990U, SM-G990U1/DS, SM-G990U1 were tested and the worst case results are reported.
(Worst case : SM-G990U)

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS (Note1)
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

Note:

1. Please refer to the SM-G990U[DTS] Test Report.

9. TEST RESULT

9.1 DUTY CYCLE


Mode	Tone (T)	Data Rate	On Time (ms)	Total Time (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11ax (HE20)	26	MCS0	5.221	5.324	0.981	0.08
		MCS1	2.650	2.751	0.963	0.16
		MCS2	1.789	1.890	0.946	0.24
		MCS3	1.358	1.462	0.929	0.32
		MCS4	0.932	1.034	0.902	0.45
		MCS5	0.717	0.818	0.876	0.57
		MCS6	0.643	0.745	0.864	0.64
		MCS7	0.593	0.694	0.854	0.69
		MCS8	0.504	0.605	0.833	0.80
		MCS9	0.464	0.565	0.821	0.86
	52	MCS0	2.650	2.751	0.963	0.16
		MCS1	1.358	1.459	0.931	0.31
		MCS2	0.932	1.034	0.902	0.45
		MCS3	0.717	0.818	0.876	0.57
		MCS4	0.504	0.605	0.833	0.80
		MCS5	0.395	0.497	0.796	0.99
		MCS6	0.360	0.461	0.780	1.08
		MCS7	0.334	0.436	0.767	1.15
		MCS8	0.289	0.390	0.740	1.31
		MCS9	0.271	0.372	0.728	1.38
	106	MCS0	1.284	1.386	0.927	0.33
		MCS1	0.679	0.780	0.870	0.60
		MCS2	0.479	0.580	0.825	0.83
		MCS3	0.377	0.479	0.788	1.03
		MCS4	0.276	0.377	0.732	1.36
		MCS5	0.228	0.329	0.692	1.60
		MCS6	0.208	0.309	0.672	1.73
		MCS7	0.200	0.301	0.664	1.78
		MCS8	0.177	0.279	0.636	1.96
		MCS9	0.167	0.266	0.629	2.02

Mode	Tone (T)	Data Rate	On Time (ms)	Total Time (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11ax (HE20)	242	MCS0	0.600	0.702	0.856	0.68
		MCS1	0.337	0.438	0.769	1.14
		MCS2	0.248	0.350	0.710	1.49
		MCS3	0.205	0.307	0.669	1.74
		MCS4	0.165	0.266	0.619	2.08
		MCS5	0.142	0.241	0.589	2.30
		MCS6	0.137	0.238	0.574	2.41
		MCS7	0.127	0.228	0.556	2.55
		MCS8	0.124	0.223	0.557	2.54
		MCS9	0.117	0.218	0.535	2.72
802.11ax(SU)	BW 20	MCS0	0.588	0.689	0.853	0.69
		MCS1	0.329	0.431	0.765	1.17
		MCS2	0.243	0.345	0.706	1.51
		MCS3	0.200	0.301	0.664	1.78
		MCS4	0.160	0.261	0.612	2.13
		MCS5	0.137	0.236	0.581	2.36
		MCS6	0.132	0.231	0.571	2.43
		MCS7	0.122	0.220	0.552	2.58
		MCS8	0.119	0.218	0.547	2.62
		MCS9	0.111	0.210	0.530	2.76

Test Plots

Note:

In order to simplify the report, attached plots were only the most lowest datarate.

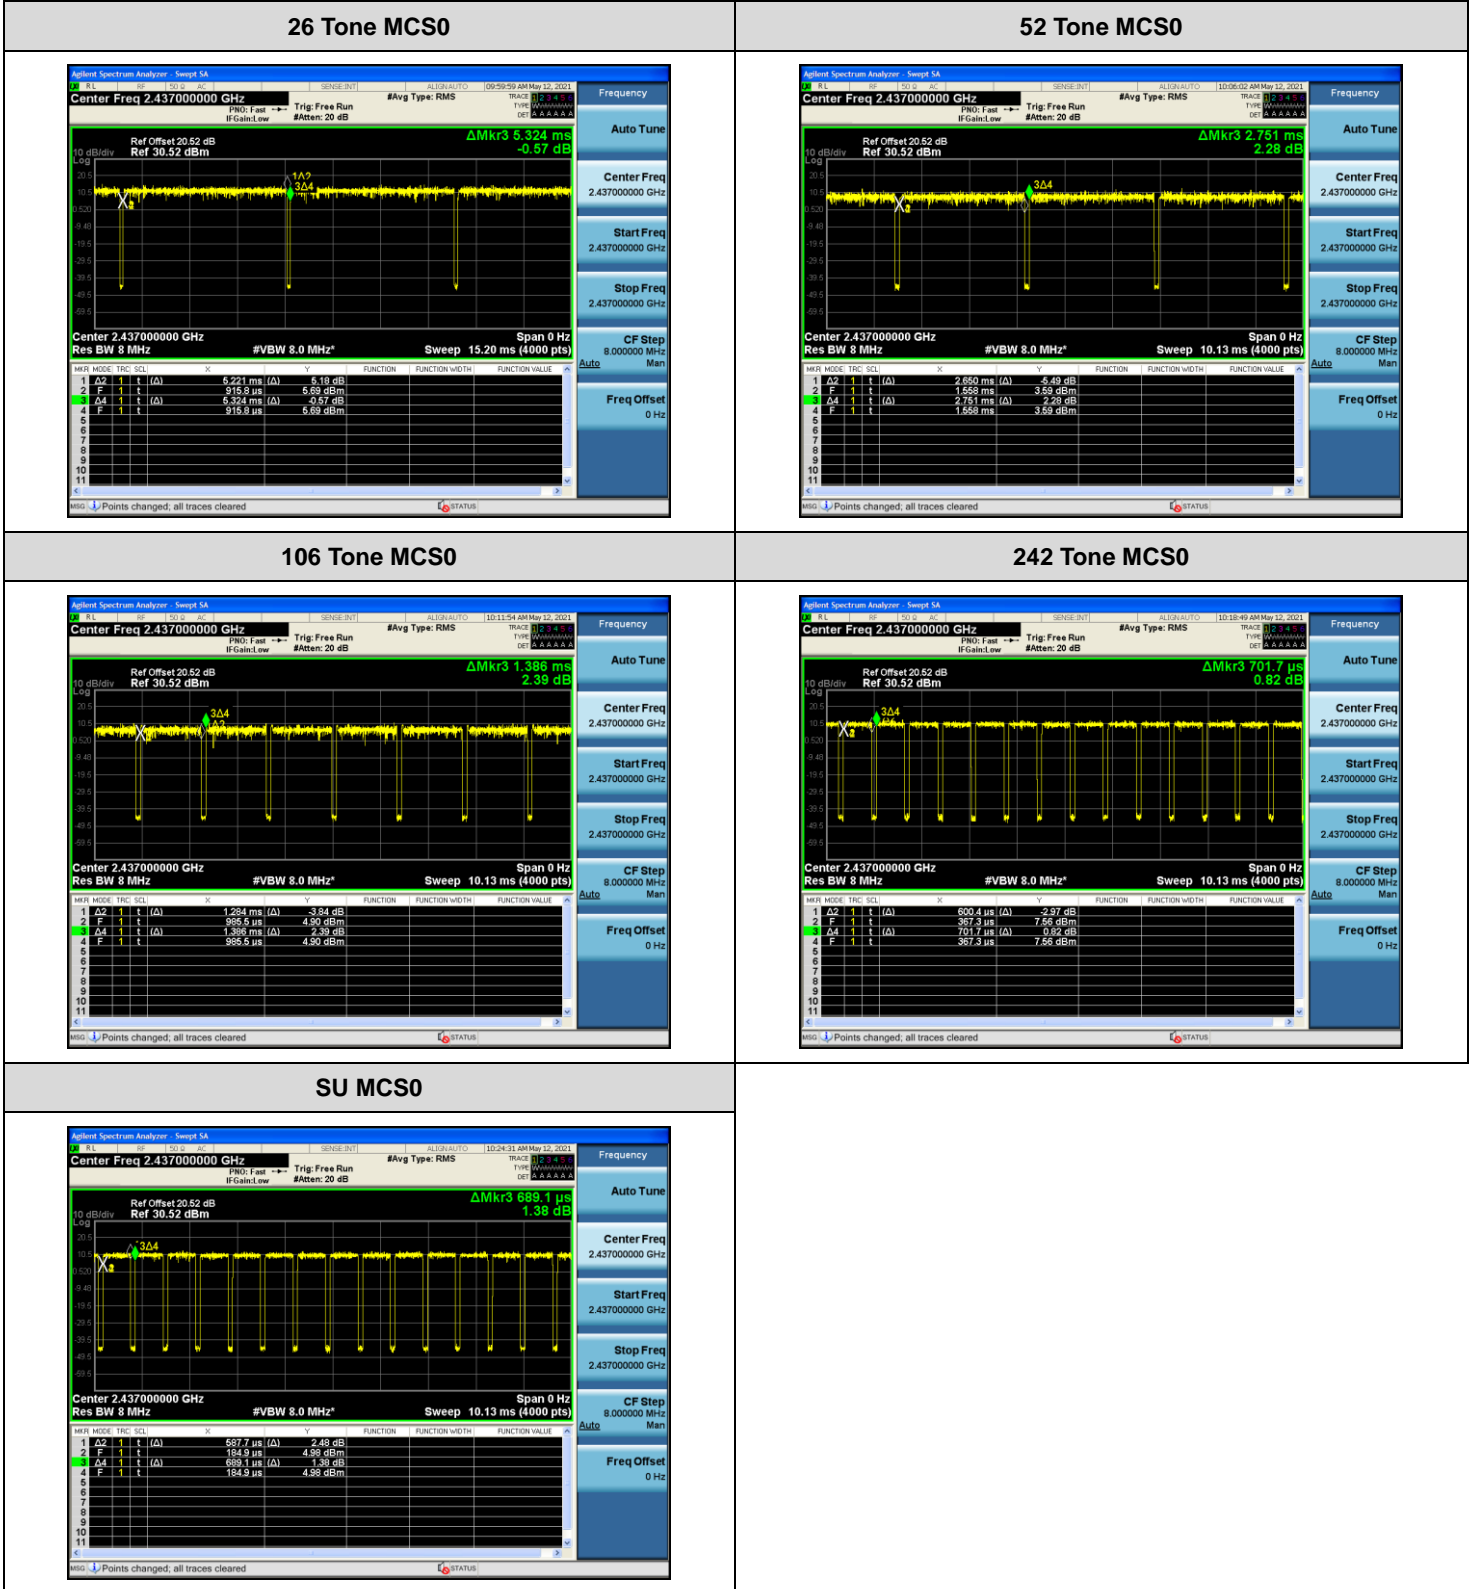

9.2 6dB BANDWIDTH

[ANT1]

BW	Frequency [MHz]	Channel No.	RU Index	6dB BW (MHz)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	2.096	16.97	17.17	-	-
			Mid	2.682	10.37	-	19.01	16.64
			High	2.064	8.288	17.14	-	-
	2437	6	Low	2.109	17.07	17.19	-	-
			Mid	2.708	11.63	-	19.00	17.56
			High	2.080	8.276	17.19	-	-
	2462	11	Low	2.091	12.06	17.17	-	-
			Mid	2.677	6.642	-	19.09	17.34
			High	2.096	17.00	17.16	-	-

Limit : > 500kHz

[ANT2]

BW	Frequency [MHz]	Channel No.	RU Index	6dB BW (MHz)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	2.088	10.81	17.15	-	-
			Mid	2.677	8.78	-	19.04	17.93
			High	2.062	17.06	17.17	-	-
	2437	6	Low	2.087	17.08	17.18	-	-
			Mid	2.697	9.155	-	19.05	18.15
			High	2.124	8.252	17.18	-	-
	2462	11	Low	2.114	5.773	17.17	-	-
			Mid	2.705	6.667	-	19.07	18.04
			High	2.094	17.05	17.14	-	-


Limit : > 500kHz

Test Plots


Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

[ANT1]

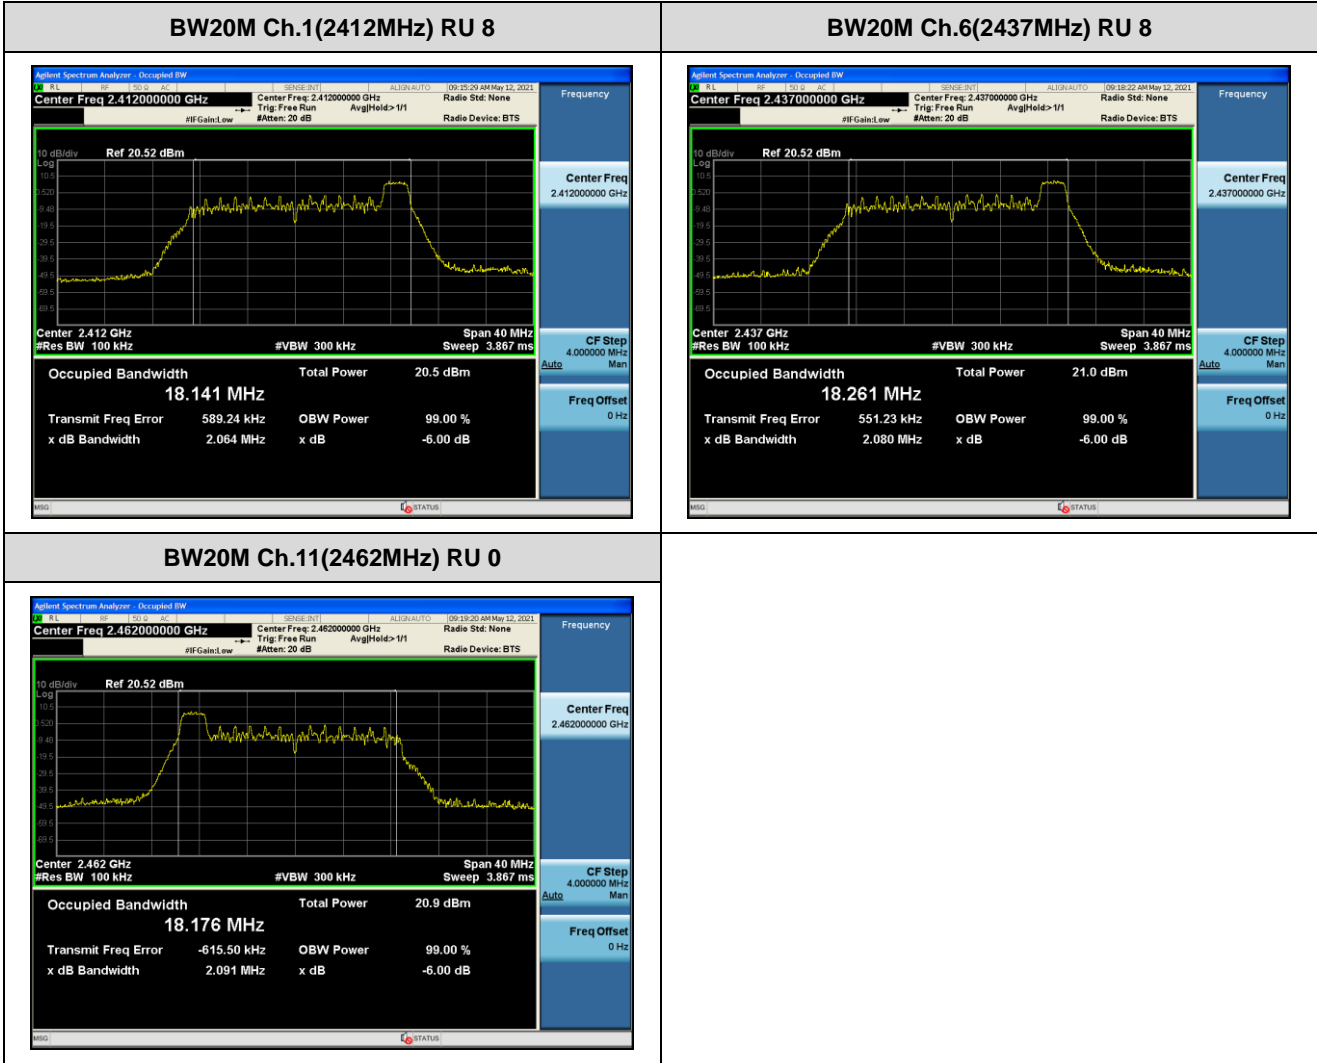

[ANT2]

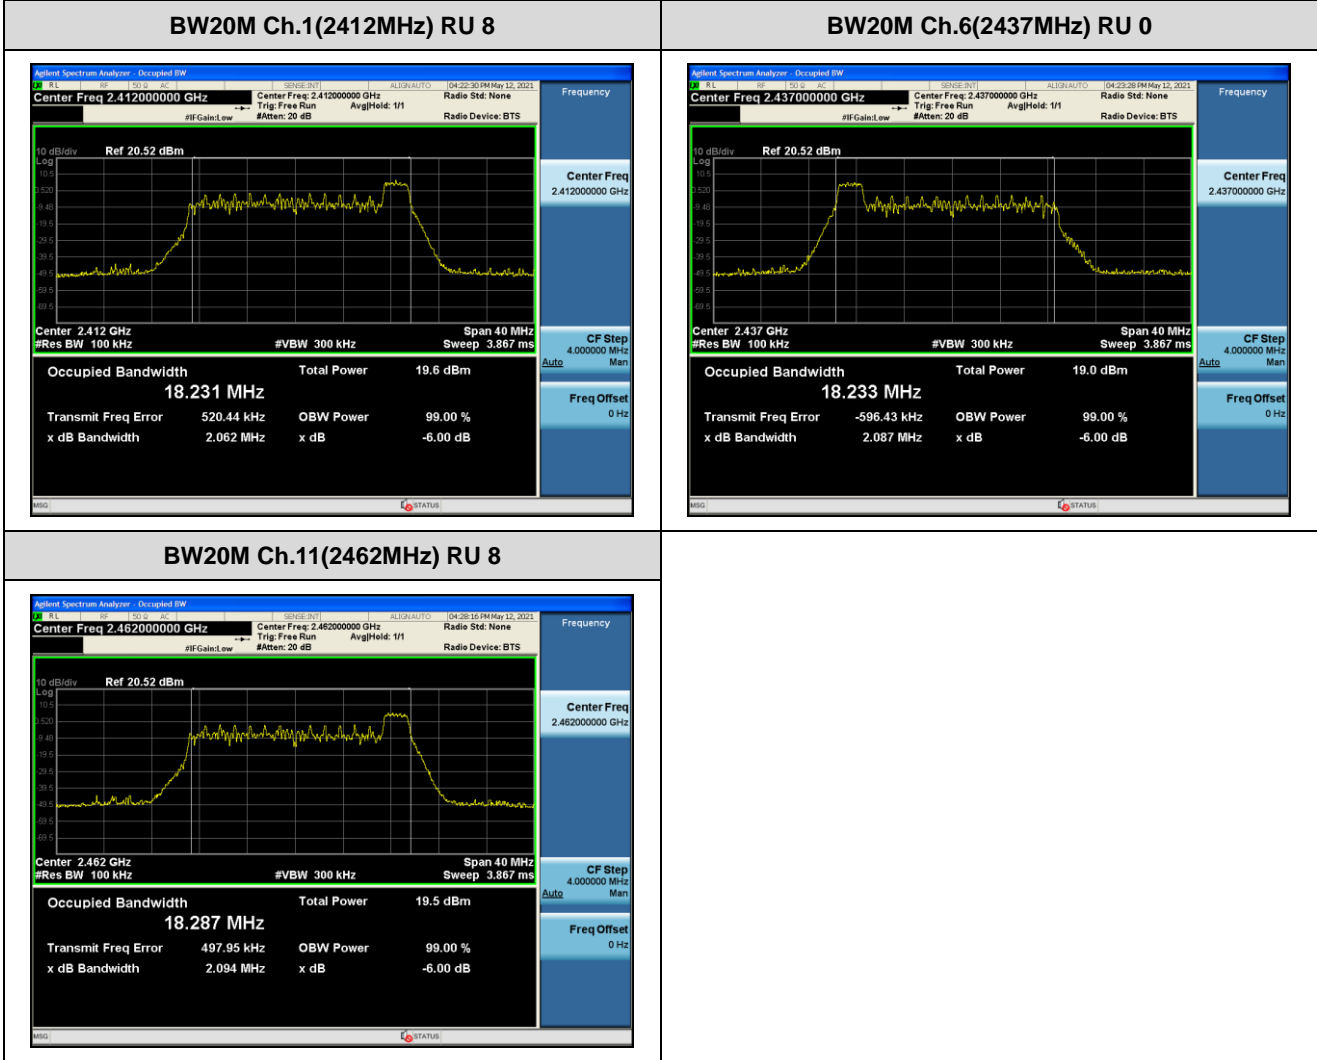

9.3 OUTPUT POWER

Power Level Setting

802.11ax Mode	Frequency [MHz]	Channel No.	26 T	52T	106T	242 T	SU
Low	2 412	1	11	11	12.5	12.5	12.5
Mid	2 437	6	11	11	12.5	12.5	12.5
High	2 462	11	11	11	12.5	12.5	12.5

Peak Power

1. Power Meter offset = Attenuator loss(20dB) + Cable loss
 2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
- So, 20.52 dB is offset for 2.4 GHz Band.

[SUM (MIMO Ant 1 + MIMO Ant 2)]

1. Total peak power for MIMO= $10\text{LOG}((10^{\text{MIMO Ant1 Total power /10}})+(10^{\text{MIMO Ant2 Total power /10}}))$

BW	Frequency [MHz]	Channel No.	RU Index	SUM Peak Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	21.79	21.65	23.98	-	-
			Mid	22.43	22.18	-	23.09	22.95
			High	21.78	21.77	24.09	-	-
	2437	6	Low	21.74	21.50	23.93	-	-
			Mid	22.27	21.98	-	23.07	22.94
			High	22.21	22.18	24.49	-	-
	2462	11	Low	22.32	22.08	24.16	-	-
			Mid	22.44	22.41	-	23.00	22.71
			High	21.50	21.73	23.67	-	-

Limit : 30dBm

Average Power

1. Power Meter offset = Attenuator loss + Cable loss
 2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
- So, 20.52 dB is offset for 2.4 GHz Band

[SUM (MIMO Ant 1 + MIMO Ant 2)]

1. Total average power for MIMO= $10\text{LOG}((10^{\text{Ant1 Total power /10}})+(10^{\text{Ant2 Total power /10}}))$

BW	Frequency [MHz]	Channel No.	RU Index	SUM Average Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	13.10	13.42	15.79	-	-
			Mid	14.49	14.33	-	15.87	15.74
			High	13.39	13.56	15.95	-	-
	2437	6	Low	13.14	13.27	15.65	-	-
			Mid	14.27	13.98	-	15.96	15.83
			High	13.87	14.08	16.35	-	-
	2462	11	Low	13.97	14.13	16.19	-	-
			Mid	14.34	14.58	-	15.71	15.70
			High	12.84	13.29	15.44	-	-

Limit : 30dBm

9.4 POWER SPECTRAL DENSITY

Note :

1. Spectrum reading values are not plot data.
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. 20.52 dB is offset for 2.4 GHz Band.
4. Total PSD = Reading Value + Duty Cycle Factor

[SUM (MIMO Ant 1 + MIMO Ant 2)]

BW	Frequency [MHz]	Channel No.	RU Index	SUM Total PSD (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	-4.031	-6.649	-6.888	-	-
			Mid	-2.722	-5.670	-	-9.980	-8.731
			High	-3.664	-6.730	-7.272	-	-
	2437	6	Low	-3.904	-7.047	-7.563	-	-
			Mid	-2.816	-6.289	-	-9.515	-9.108
			High	-3.194	-6.123	-6.944	-	-
	2462	11	Low	-3.070	-6.075	-7.286	-	-
			Mid	-2.767	-5.575	-	-9.858	-9.384
			High	-4.394	-6.854	-7.567	-	-


Limit : 8dBm

Test Plots


Note:

1. In order to simplify the report, attached plots were only the worstcase PSD channel.
2. Total PSD(dBm) = Reading Value + Duty Cycle Factor


[SUM (MIMO Ant 1 + MIMO Ant 2)]

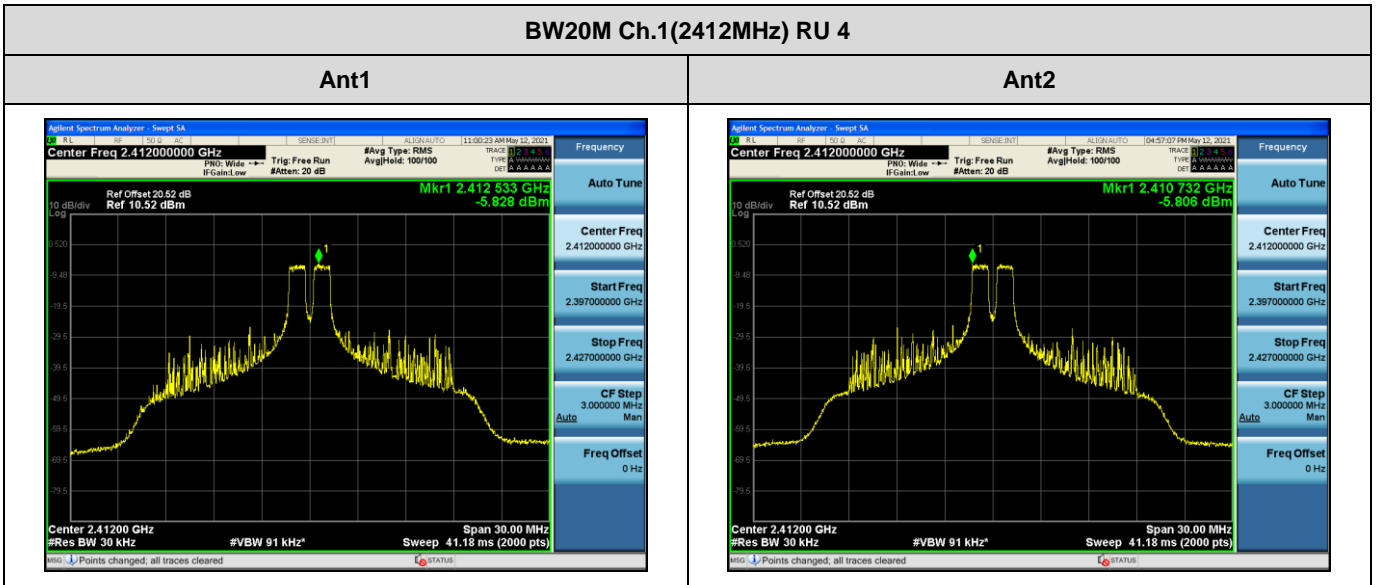

SUM PSD (dBm)	Duty Cycle Factor (dB)	Total SUM PSD (dBm)
-2.807	0.085	-2.722

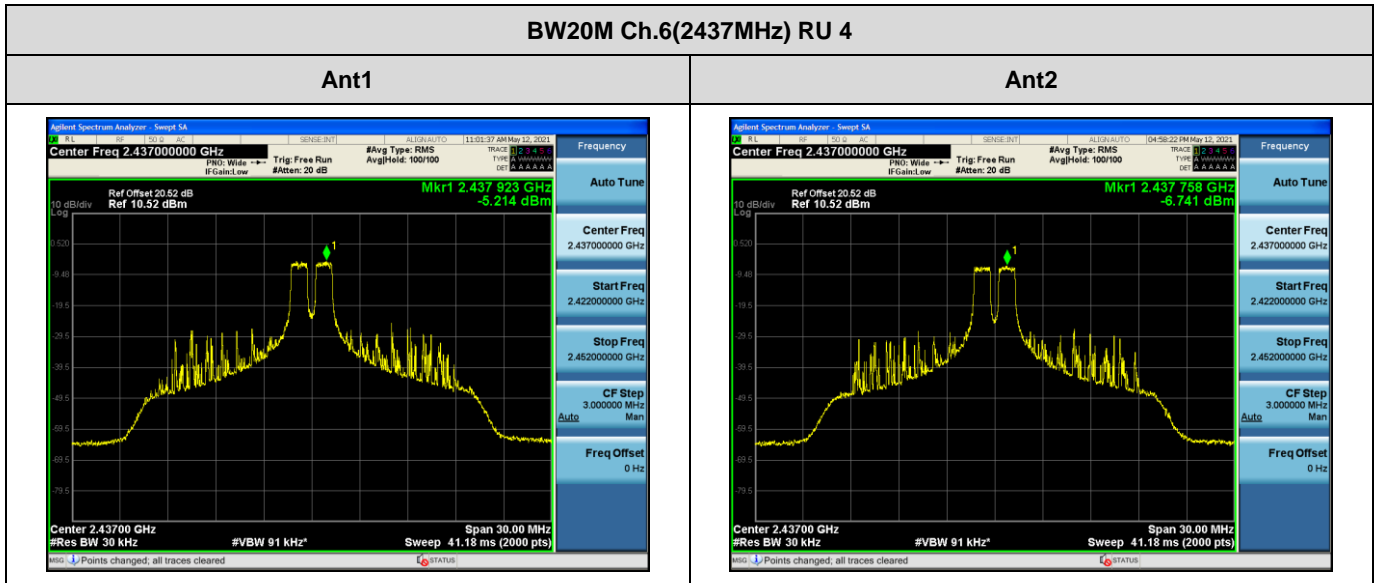

SUM PSD (dBm)	Duty Cycle Factor (dB)	Total SUM PSD (dBm)
-2.901	0.085	-2.816

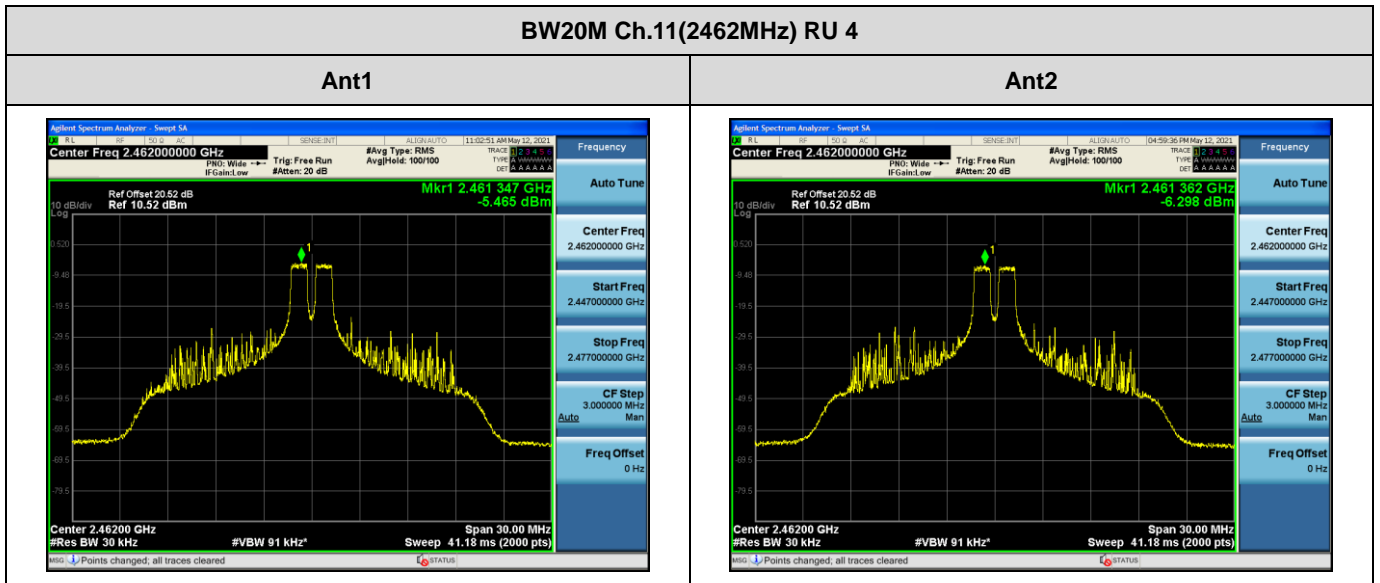

SUM PSD (dBm)	Duty Cycle Factor (dB)	Total SUM PSD (dBm)
-2.852	0.085	-2.767

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Band Edge

[MIMO Ant1]

BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)		
					26 T	52 T	106 T
HE20	2412	1	Low	Lowest Bandedge	46.121	45.508	43.154
	2462	11	High	Highest Bandedge	56.233	54.314	52.164

Limit : 30 dBc

BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)	
					242 T	SU
HE20	2412	1	Mid	Lowest Bandedge	38.882	42.046
	2462	11		Highest Bandedge	46.154	49.694

Limit : 30 dBc

[MIMO Ant2]

BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)		
					26 T	52 T	106 T
HE20	2412	1	Low	Lowest Bandedge	46.850	45.201	42.028
	2462	11	High	Highest Bandedge	55.719	52.563	50.497

Limit : 30 dBc

BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)	
					242 T	SU
HE20	2412	1	Mid	Lowest Bandedge	38.170	40.258
	2462	11		Highest Bandedge	45.071	47.509


Limit : 30 dBc

Test Plots


Note:

In order to simplify the report, attached plots were only the worst case.

[MIMO Ant1]

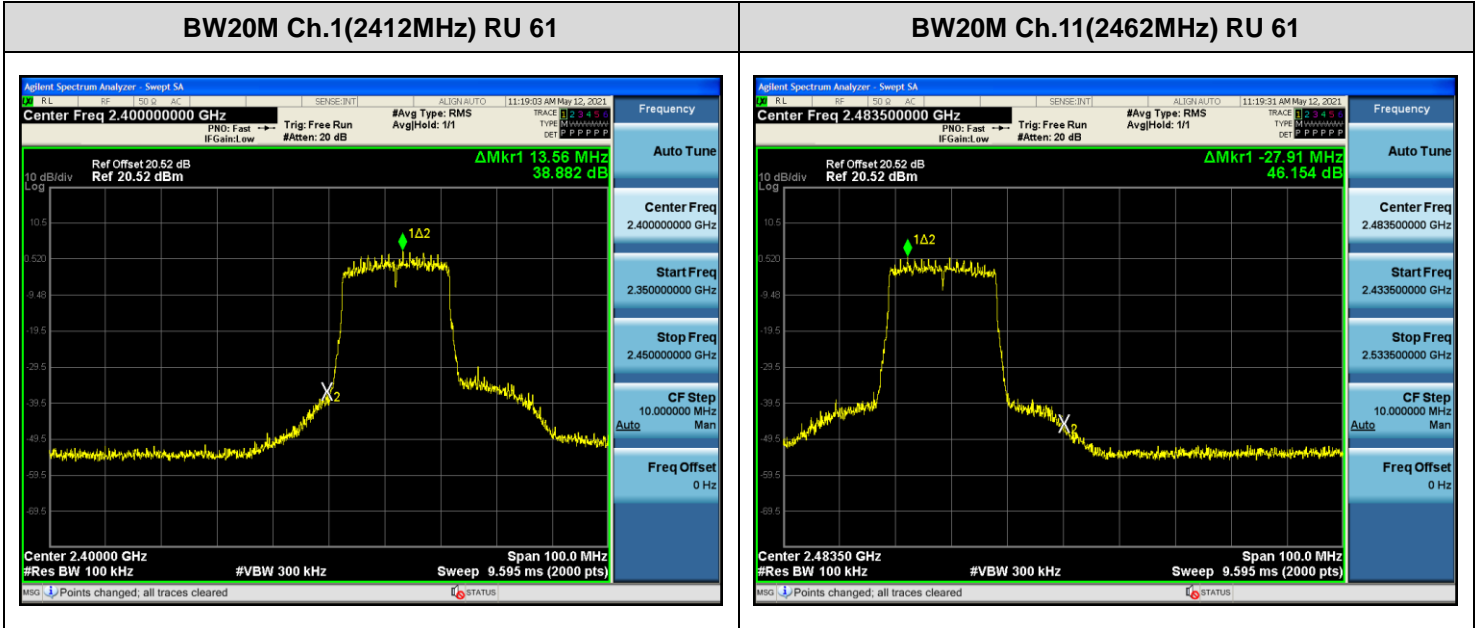

[MIMO Ant2]

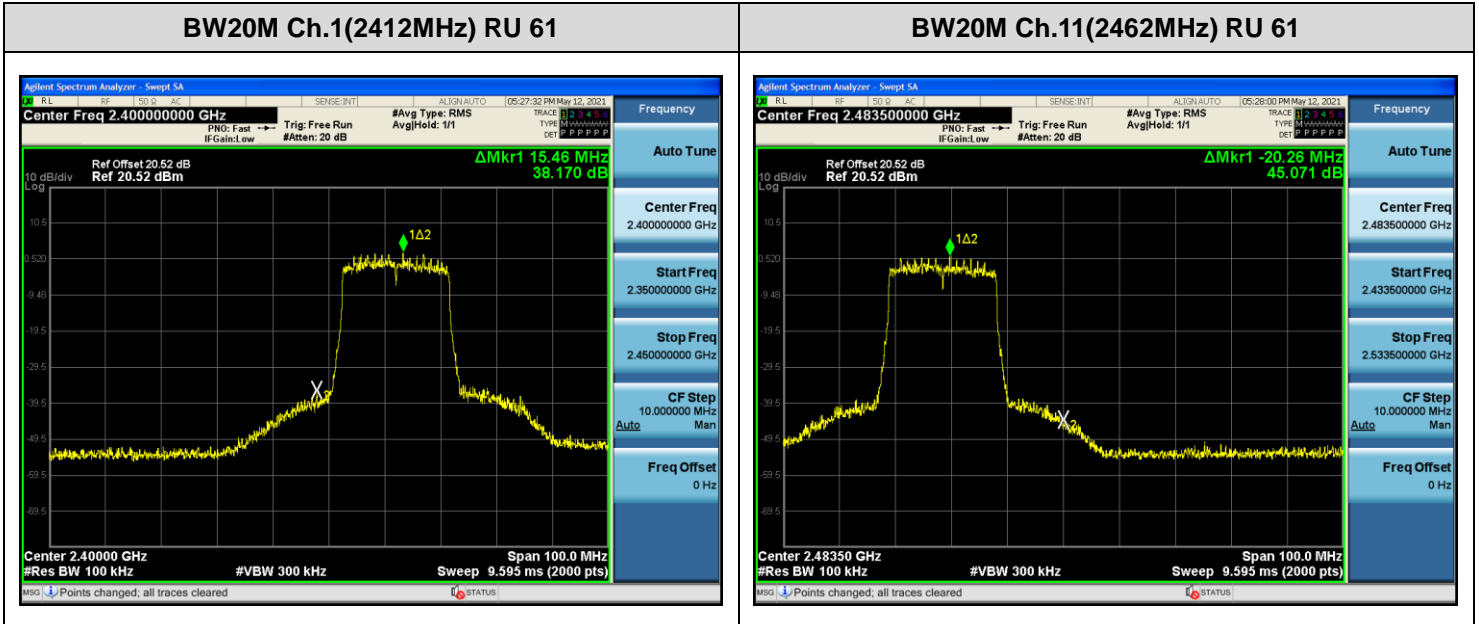

Conducted Spurious Emissions

[MIMO ANT1]

BW	Frequency [MHz]	Channel No.	RU Index	Result (dB)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	40.470	38.685	40.784	-	-
			Mid	42.118	39.731	-	38.572	36.600
			High	43.144	40.715	37.439	-	-
	2437	6	Low	41.475	39.076	39.912	-	-
			Mid	42.071	40.290	-	38.017	38.120
			High	41.667	40.783	39.698	-	-
	2462	11	Low	41.788	39.722	38.978	-	-
			Mid	42.784	40.508	-	37.449	37.804
			High	42.644	39.912	39.000	-	-

Limit : 30 dBc

[MIMO ANT2]


BW	Frequency [MHz]	Channel No.	RU Index	Result (dB)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	42.874	39.460	41.355	-	-
			Mid	39.693	40.333	-	38.343	38.048
			High	41.088	38.069	37.446	-	-
	2437	6	Low	39.674	37.618	37.396	-	-
			Mid	40.917	39.759	-	39.321	37.112
			High	41.749	38.342	38.853	-	-
	2462	11	Low	41.778	40.741	39.514	-	-
			Mid	41.307	40.675	-	38.009	37.364
			High	40.873	38.540	38.653	-	-

Limit : 30 dBc

Test Plots

Note:

In order to simplify the report, attached plots were only the worst case.

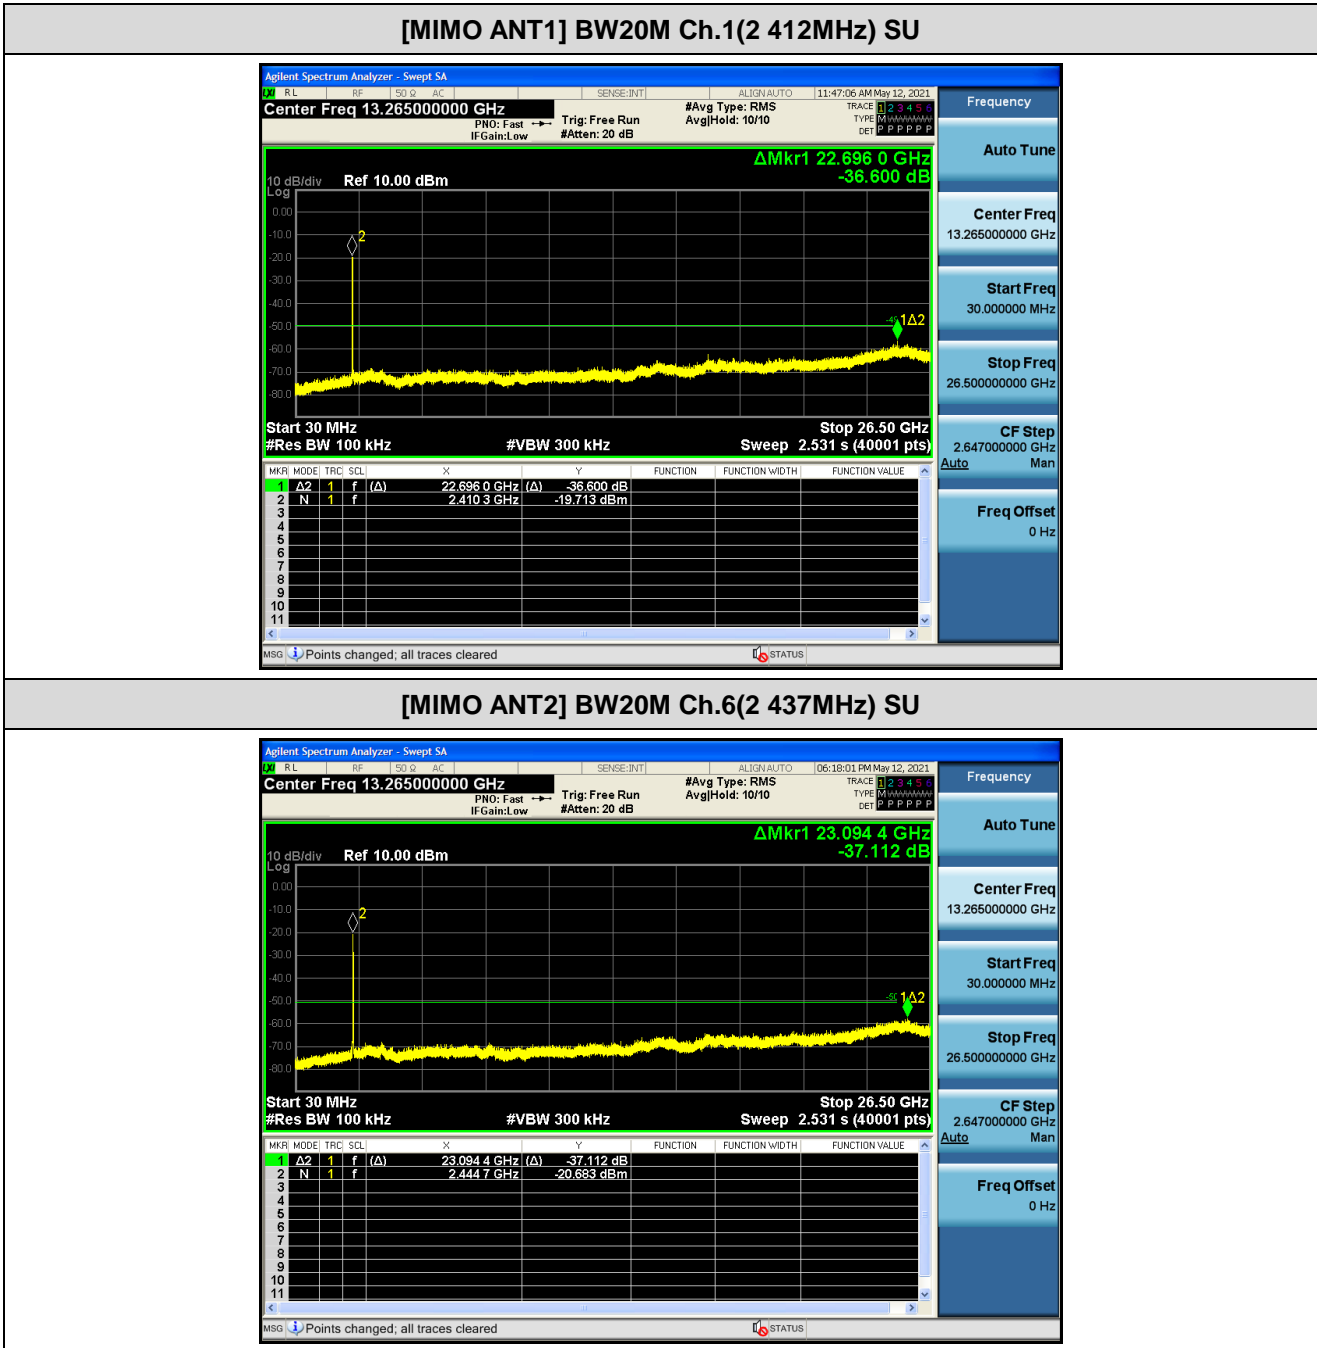

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

[MIMO]

1. 26 Tone

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch
RU offset	4

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	51.49	0.00	4.11	V	55.60	73.98	18.38	PK
4824	35.50	0.08	4.11	V	39.69	53.98	14.29	AV
7236	38.24	0.00	12.15	V	50.39	73.98	23.59	PK
7236	25.57	0.08	12.15	V	37.80	53.98	16.18	AV
4824	50.21	0.00	4.11	H	54.32	73.98	19.66	PK
4824	35.33	0.08	4.11	H	39.52	53.98	14.46	AV
7236	38.11	0.00	12.15	H	50.26	73.98	23.72	PK
7236	25.44	0.08	12.15	H	37.67	53.98	16.31	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch
RU offset	4

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	52.75	0.00	4.00	V	56.75	73.98	17.23	PK
4874	37.74	0.08	4.00	V	41.82	53.98	12.16	AV
7311	37.87	0.00	12.39	V	50.26	73.98	23.72	PK
7311	25.86	0.08	12.39	V	38.33	53.98	15.65	AV
4874	51.04	0.00	4.00	H	55.04	73.98	18.94	PK
4874	35.47	0.08	4.00	H	39.55	53.98	14.43	AV
7311	38.07	0.00	12.39	H	50.46	73.98	23.52	PK
7311	25.93	0.08	12.39	H	38.40	53.98	15.58	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2462
 Channel No.: 11 Ch
 RU offset: 4

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	54.57	0.00	4.29	V	58.86	73.98	15.12	PK
4924	39.37	0.08	4.29	V	43.74	53.98	10.24	AV
7386	38.51	0.00	12.44	V	50.95	73.98	23.03	PK
7386	25.86	0.08	12.44	V	38.38	53.98	15.60	AV
4924	53.74	0.00	4.29	H	58.03	73.98	15.95	PK
4924	38.50	0.08	4.29	H	42.87	53.98	11.11	AV
7386	37.78	0.00	12.44	H	50.22	73.98	23.76	PK
7386	25.90	0.08	12.44	H	38.42	53.98	15.56	AV

2. 52 Tone

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch
RU offset	38

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	51.72	0.00	4.11	V	55.83	73.98	18.15	PK
4824	35.71	0.16	4.11	V	39.98	53.98	14.00	AV
7236	37.68	0.00	12.15	V	49.83	73.98	24.15	PK
7236	25.62	0.16	12.15	V	37.93	53.98	16.05	AV
4824	50.06	0.00	4.11	H	54.17	73.98	19.81	PK
4824	34.74	0.16	4.11	H	39.01	53.98	14.97	AV
7236	37.05	0.00	12.15	H	49.20	73.98	24.78	PK
7236	25.46	0.16	12.15	H	37.77	53.98	16.21	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch
RU offset	40

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	52.03	0.00	4.00	V	56.03	73.98	17.95	PK
4874	36.08	0.16	4.00	V	40.24	53.98	13.74	AV
7311	37.91	0.00	12.39	V	50.30	73.98	23.68	PK
7311	25.87	0.16	12.39	V	38.42	53.98	15.56	AV
4874	51.15	0.00	4.00	H	55.15	73.98	18.83	PK
4874	34.90	0.16	4.00	H	39.06	53.98	14.92	AV
7311	38.26	0.00	12.39	H	50.65	73.98	23.33	PK
7311	25.94	0.16	12.39	H	38.49	53.98	15.49	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch
RU offset	38

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	53.98	0.00	4.29	V	58.27	73.98	15.71	PK
4924	38.58	0.16	4.29	V	43.03	53.98	10.95	AV
7386	38.74	0.00	12.44	V	51.18	73.98	22.80	PK
7386	25.94	0.16	12.44	V	38.54	53.98	15.44	AV
4924	52.84	0.00	4.29	H	57.13	73.98	16.85	PK
4924	37.96	0.16	4.29	H	42.41	53.98	11.57	AV
7386	38.25	0.00	12.44	H	50.69	73.98	23.29	PK
7386	25.88	0.16	12.44	H	38.48	53.98	15.50	AV

3. 106 Tone

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch
RU offset	54

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	49.84	0.00	4.11	V	53.95	73.98	20.03	PK
4824	35.12	0.33	4.11	V	39.56	53.98	14.42	AV
7236	37.54	0.00	12.15	V	49.69	73.98	24.29	PK
7236	25.76	0.33	12.15	V	38.24	53.98	15.74	AV
4824	50.74	0.00	4.11	H	54.85	73.98	19.13	PK
4824	35.31	0.33	4.11	H	39.75	53.98	14.23	AV
7236	37.72	0.00	12.15	H	49.87	73.98	24.11	PK
7236	25.87	0.33	12.15	H	38.35	53.98	15.63	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch
RU offset	54

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	50.45	0.00	4.00	V	54.45	73.98	19.53	PK
4874	37.08	0.33	4.00	V	41.41	53.98	12.57	AV
7311	38.20	0.00	12.39	V	50.59	73.98	23.39	PK
7311	26.10	0.33	12.39	V	38.82	53.98	15.16	AV
4874	50.90	0.00	4.00	H	54.90	73.98	19.08	PK
4874	37.24	0.33	4.00	H	41.57	53.98	12.41	AV
7311	38.47	0.00	12.39	H	50.86	73.98	23.12	PK
7311	26.25	0.33	12.39	H	38.97	53.98	15.01	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2462
 Channel No.: 11 Ch
 RU offset: 53

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	52.88	0.00	4.29	V	57.17	73.98	16.81	PK
4924	37.94	0.33	4.29	V	42.56	53.98	11.42	AV
7386	37.94	0.00	12.44	V	50.38	73.98	23.60	PK
7386	26.03	0.33	12.44	V	38.80	53.98	15.18	AV
4924	53.09	0.00	4.29	H	57.38	73.98	16.60	PK
4924	38.47	0.33	4.29	H	43.09	53.98	10.89	AV
7386	38.15	0.00	12.44	H	50.59	73.98	23.39	PK
7386	26.27	0.33	12.44	H	39.04	53.98	14.94	AV

4. 242 Tone

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch
RU offset	61

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	50.15	0.00	4.11	V	54.26	73.98	19.72	PK
4824	35.04	0.68	4.11	V	39.83	53.98	14.15	AV
7236	37.78	0.00	12.15	V	49.93	73.98	24.05	PK
7236	25.56	0.68	12.15	V	38.39	53.98	15.59	AV
4824	49.70	0.00	4.11	H	53.81	73.98	20.17	PK
4824	34.85	0.68	4.11	H	39.64	53.98	14.34	AV
7236	37.93	0.00	12.15	H	50.08	73.98	23.90	PK
7236	25.75	0.68	12.15	H	38.58	53.98	15.40	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch
RU offset	61

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	50.54	0.00	4.00	V	54.54	73.98	19.44	PK
4874	35.91	0.68	4.00	V	40.59	53.98	13.39	AV
7311	38.46	0.00	12.39	V	50.85	73.98	23.13	PK
7311	26.22	0.68	12.39	V	39.29	53.98	14.69	AV
4874	50.25	0.00	4.00	H	54.25	73.98	19.73	PK
4874	35.97	0.68	4.00	H	40.65	53.98	13.33	AV
7311	38.47	0.00	12.39	H	50.86	73.98	23.12	PK
7311	26.28	0.68	12.39	H	39.35	53.98	14.63	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch
RU offset	61


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	51.28	0.00	4.29	V	55.57	73.98	18.41	PK
4924	36.43	0.68	4.29	V	41.40	53.98	12.58	AV
7386	38.10	0.00	12.44	V	50.54	73.98	23.44	PK
7386	25.85	0.68	12.44	V	38.97	53.98	15.01	AV
4924	49.96	0.00	4.29	H	54.25	73.98	19.73	PK
4924	35.44	0.68	4.29	H	40.41	53.98	13.57	AV
7386	38.34	0.00	12.44	H	50.78	73.98	23.20	PK
7386	25.96	0.68	12.44	H	39.08	53.98	14.90	AV

▣ Test Plots


[MIMO]

(26 Tone RU 4) – Y-V

Radiated Spurious Emissions plot – Average Reading (802.11ax(HE20), Ch.11 2nd Harmonic)

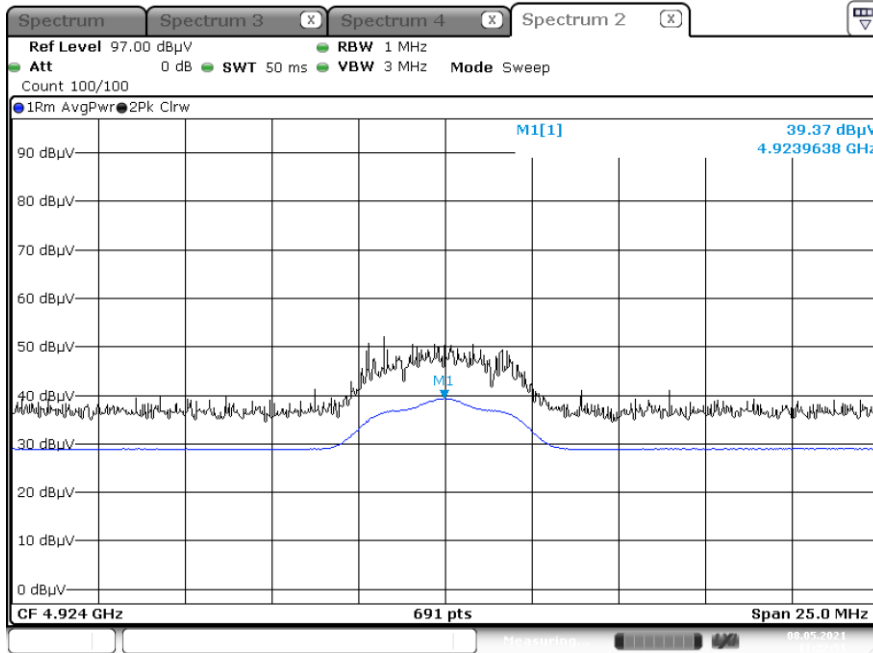


Radiated Spurious Emissions plot – Peak Reading (802.11ax(HE20), Ch.11 2nd Harmonic)

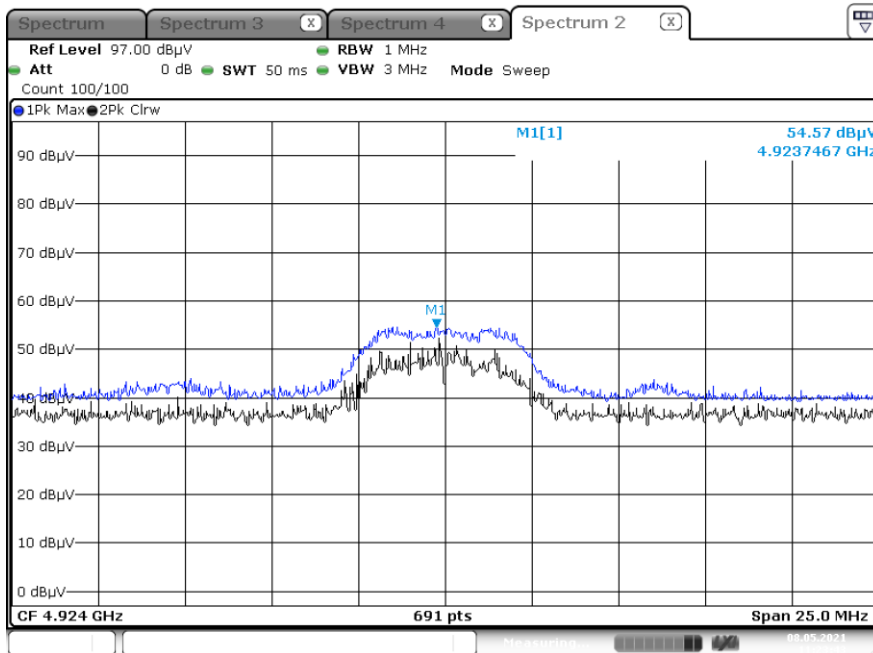


(242 Tone RU 61) – Y-V

Radiated Spurious Emissions plot – Average Reading (802.11ax(HE20), Ch.11 2nd Harmonic)

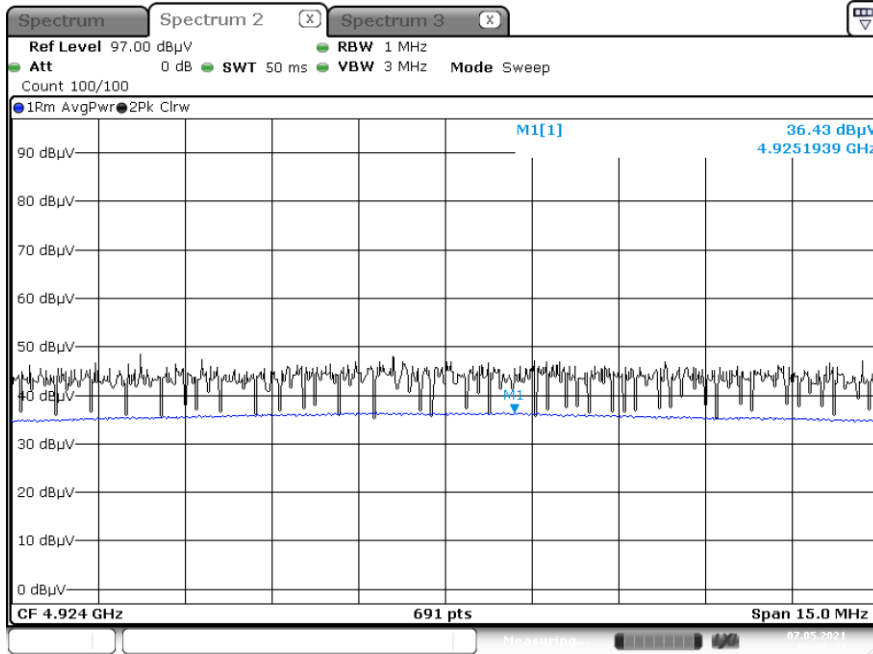

Radiated Spurious Emissions plot – Peak Reading (802.11ax(HE20), Ch.11 2nd Harmonic)

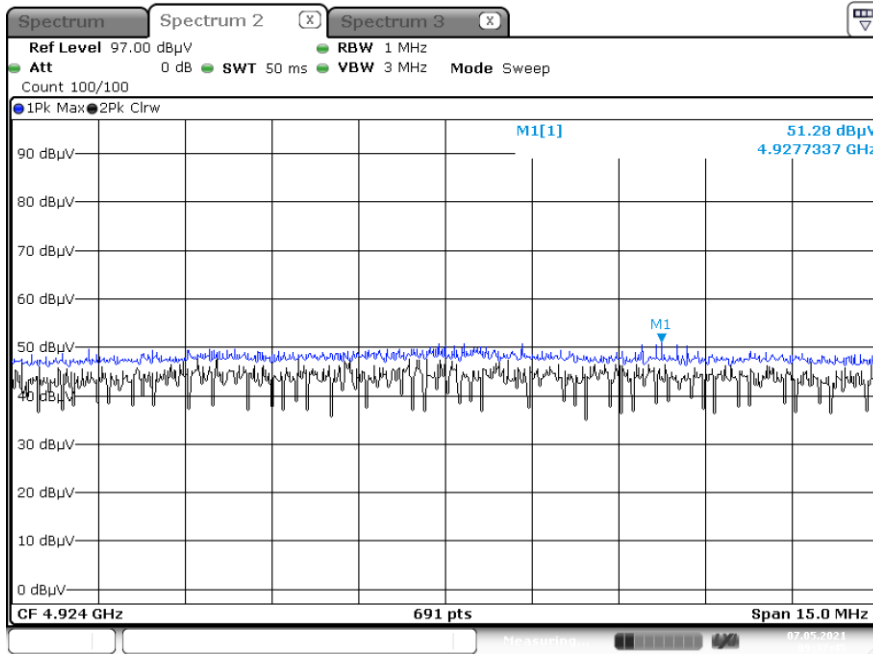

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

[MIMO]

1. 26 Tone

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.+ATT -A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	48.57	0.00	6.32	H	54.89	73.98	19.09	PK
2390.0	36.07	0.08	6.32	H	42.47	53.98	11.51	AV
2390.0	47.33	0.00	6.32	V	53.65	73.98	20.33	PK
2390.0	35.56	0.08	6.32	V	41.96	53.98	12.02	AV
2483.5	50.59	0.00	6.78	H	57.37	73.98	16.61	PK
2483.5	36.31	0.08	6.78	H	43.17	53.98	10.81	AV
2483.5	49.81	0.00	6.78	V	56.59	73.98	17.39	PK
2483.5	35.39	0.08	6.78	V	42.25	53.98	11.73	AV

2. 52 Tone

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.+ATT -A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	47.76	0.00	6.32	H	54.08	73.98	19.90	PK
2390.0	36.18	0.16	6.32	H	42.66	53.98	11.32	AV
2390.0	46.78	0.00	6.32	V	53.10	73.98	20.88	PK
2390.0	36.01	0.16	6.32	V	42.49	53.98	11.49	AV
2483.5	49.23	0.00	6.78	H	56.01	73.98	17.97	PK
2483.5	36.62	0.16	6.78	H	43.56	53.98	10.42	AV
2483.5	47.59	0.00	6.78	V	54.37	73.98	19.61	PK
2483.5	35.89	0.16	6.78	V	42.83	53.98	11.15	AV

3. 106 Tone

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.+ATT -A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	51.74	0.00	6.32	H	58.06	73.98	15.92	PK
2390.0	36.95	0.33	6.32	H	43.60	53.98	10.38	AV
2390.0	49.30	0.00	6.32	V	55.62	73.98	18.36	PK
2390.0	35.84	0.33	6.32	V	42.49	53.98	11.49	AV
2483.5	55.56	0.00	6.78	H	62.34	73.98	11.64	PK
2483.5	38.61	0.33	6.78	H	45.72	53.98	8.26	AV
2483.5	54.13	0.00	6.78	V	60.91	73.98	13.07	PK
2483.5	37.39	0.33	6.78	V	44.50	53.98	9.48	AV

4. 242 Tone

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz, 2457 MHz
 Channel No.: 01 Ch, 10 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.+ATT -A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	61.53	0.00	6.32	H	67.85	73.98	6.13	PK
2390.0	42.45	0.68	6.32	H	49.45	53.98	4.53	AV
2390.0	59.23	0.00	6.32	V	65.55	73.98	8.43	PK
2390.0	41.67	0.68	6.32	V	48.67	53.98	5.31	AV
2483.5	60.57	0.00	6.78	H	67.35	73.98	6.63	PK
2483.5	40.52	0.68	6.78	H	47.98	53.98	6.00	AV
2483.5	59.11	0.00	6.78	V	65.89	73.98	8.09	PK
2483.5	39.58	0.68	6.78	V	47.04	53.98	6.94	AV

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2462 MHz
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.+ATT -A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	63.42	0.00	6.78	H	70.20	73.98	3.78	PK
2483.5	62.92	0.00	6.78	V	69.70	73.98	4.28	PK
2483.5#(2484)	43.82	0.68	6.78	H	51.28	53.98	2.72	AV
2483.5#(2485)	42.41	0.68	6.78	H	49.87	53.98	4.13	AV
2485.5~2500	40.84	0.68	6.78	H	48.30	53.98	5.70	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)

5. 242 Tone SU

Operation Mode: 802.11ax(HE20)
 Transfer MCS Index: 0
 Operating Frequency: 2462 MHz
 Channel No.: 11 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.+ATT -A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	64.22	0.00	6.78	H	71.00	73.98	2.98	PK
2483.5	63.24	0.00	6.78	V	70.02	73.98	3.96	PK
2483.5#(2484)	43.25	0.69	6.78	H	50.72	53.98	3.26	AV
2483.5#(2485)	41.59	0.69	6.78	H	49.06	53.98	4.92	AV
2485.5~2500	41.08	0.69	6.78	H	48.55	53.98	5.43	AV

Note : integration method Used (ANSI C63.10 Section11.13.3)


■ Test Plots (242 Tone) X-H

[MIMO]

Radiated Restricted Band Edges plot – Peak Reading (802.11ax(HE20) Ch.11) RU 61

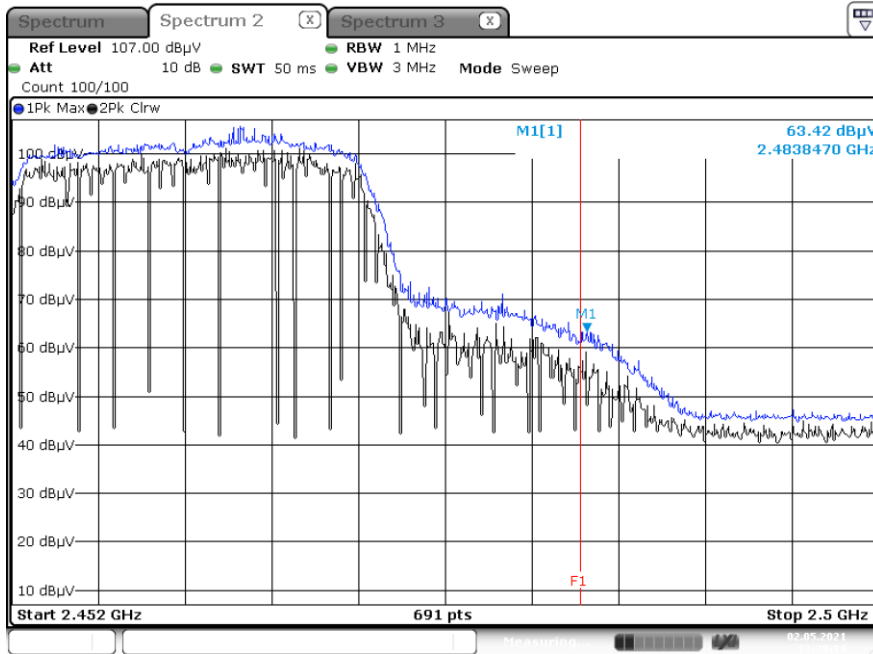


Radiated Restricted Band Edges plot – Peak Reading (802.11ax(HE20) Ch.11) RU 61

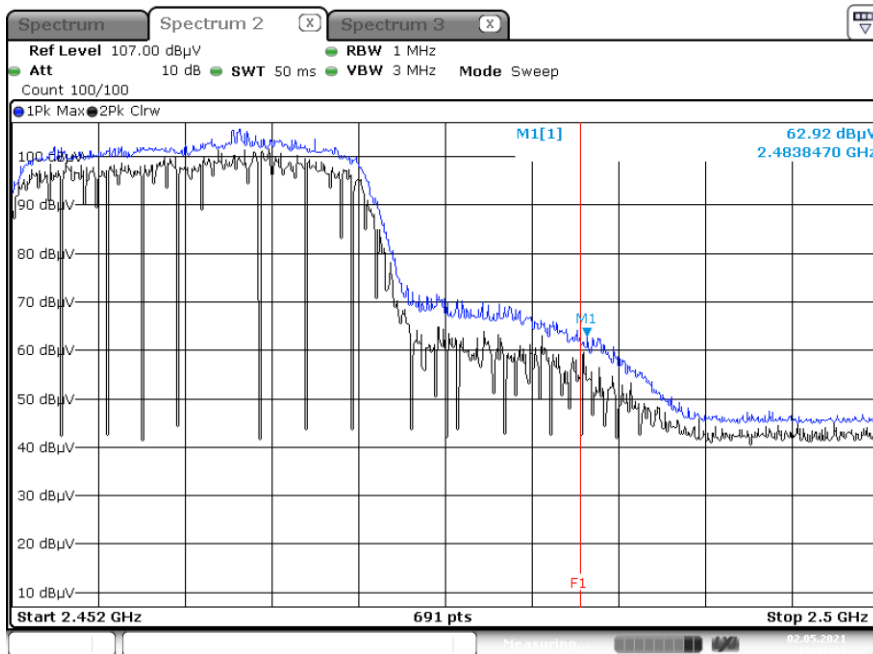


Radiated Restricted Band Edges plot – Average Reading (802.11ax(HE20) Ch.11) RU 61

Integration method Used_2 484 MHz

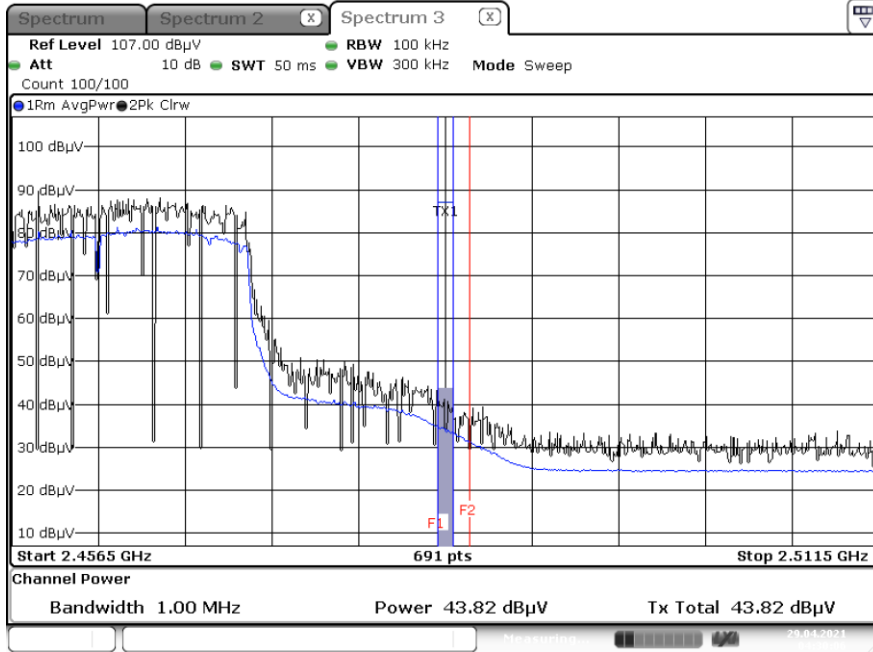


Radiated Restricted Band Edges plot – Average Reading (802.11ax(HE20) Ch.11) RU 61

Integration method Used_2 485 MHz

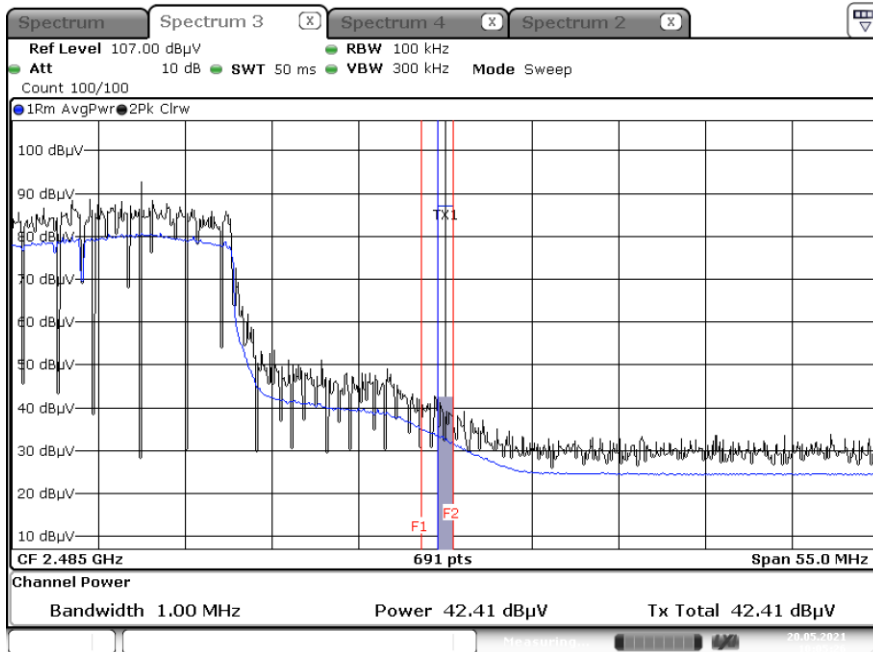

Radiated Restricted Band Edges plot – Average Reading (802.11ax(HE20) Ch.11) RU 61

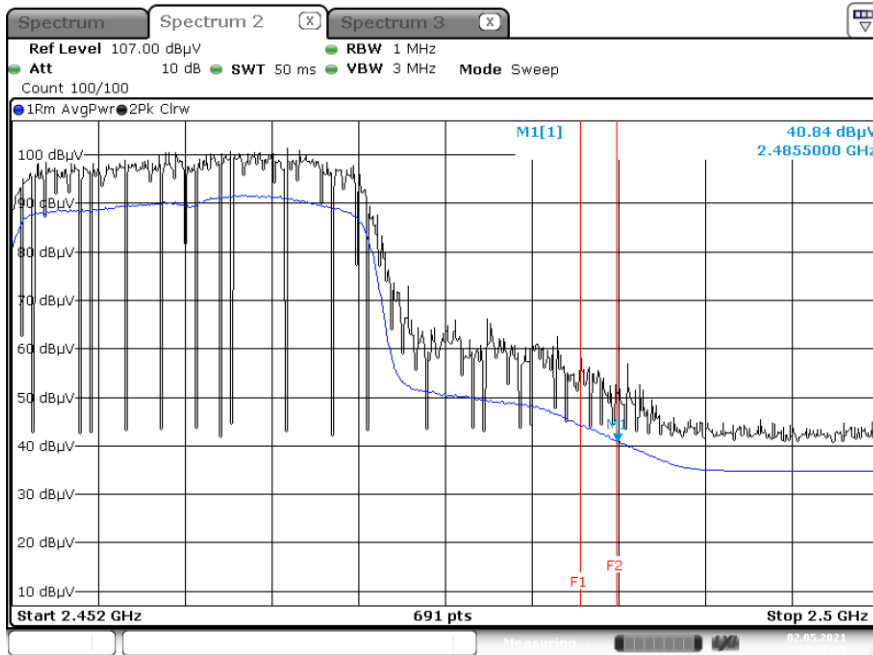

Note:

Plot of worst case are only reported.

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/04/2020	Annual	102245
Rohde & Schwarz	ESR / EMI Test Receiver	09/16/2020	Annual	101910
ESPEC	SU-642 / Temperature Chamber	07/30/2020	Annual	0093000718
Agilent	N9020A / Signal Analyzer	05/03/2021	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	03/09/2021	Annual	MY49432108
Agilent	N1911A / Power Meter	04/08/2021	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/08/2021	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/10/2020	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	02/09/2021	Annual	10545
HP	E3632A / DC Power Supply	09/16/2020	Annual	MY40004427
HP	8493C / Attenuator(10 dB)(DC-26.5 GHz)	06/26/2020	Annual	07560
HP	8493C / Attenuator(10 dB)(DC-26.5 GHz)	07/03/2020	Annual	08285
Rohde & Schwarz	18N-20dB / Attenuator(20 dB)	03/08/2021	Annual	8
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
TNM system	FBSM-01B / Amp & Filter Bank Switch Controller	N/A	N/A	N/A
Schwarzbeck	Loop Antenna	03/19/2020	Biennial	1513-333
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/02/2019	Biennial	01039
Schwarzbeck	BBHA 9120D / Horn Antenna	08/01/2019	Biennial	9120D-1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	02/11/2020	Biennial	BBHA9170124
Rohde & Schwarz	FSV(10 Hz ~ 40 GHz) / Spectrum Analyzer	05/14/2021	Annual	101055
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/06/2021	Annual	2
Wainwright Instruments	WRCJV12-4900-5100-5900-6100-50SS	06/24/2021	Annual	5
Wainwright Instruments	WRCJV12-4900-5100-5900-6100-50SS	06/24/2021	Annual	6
CERNEX	CBL18265035 / Power Amplifier	12/04/2020	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2021	Annual	25956
TNM system	FBSM-05B / HPF(3~18GHz) + LNA1(1~18GHz)	01/20/2021	Annual	F6
TNM system	FBSM-05B / ATT(10dB) + LNA1(1~18GHz)	01/20/2021	Annual	None
TNM system	FBSM-05B / ATT(3dB) + LNA1(1~18GHz)	01/20/2021	Annual	None
TNM system	FBSM-05B / LNA1(1~18GHz)	01/20/2021	Annual	25540
TNM system	FBSM-05B / HPF(7~18GHz) + LNA2(6~18GHz)	01/20/2021	Annual	28550
TNM system	FBSM-05B / Thru(30MHz ~ 18GHz)	01/20/2021	Annual	None
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/08/2021	Annual	1
Weinschel	2-3 / Attenuator (3 dB)	10/07/2020	Annual	BR0617
H+S	5910-N-50-010 / Attenuator(10 dB)	10/28/2020	Annual	None
Rohde & Schwarz	ESCI / Test Receiver	06/10/2020	Annual	100584

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2105-FC040-P