

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
June 15, 2021

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2105-FC023-R1

FCC ID: A3LSMG990U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-G990U
 Additional Model(s): SM-G990U1/DS, SM-G990U1
 EUT Type: Mobile Phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §90, §22, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band26 (1.4)	814.7 – 823.3	1M10G7D	QPSK	0.258	24.11
		1M09W7D	16QAM	0.223	23.48
		1M10W7D	64QAM	0.172	22.35
		1M09W7D	256QAM	0.085	19.29
LTE – Band26 (3)	815.5 – 822.5	2M72G7D	QPSK	0.259	24.14
		2M71W7D	16QAM	0.218	23.39
		2M70W7D	64QAM	0.172	22.36
		2M70W7D	256QAM	0.086	19.32
LTE – Band26 (5)	816.5 – 821.5	4M49G7D	QPSK	0.256	24.08
		4M50W7D	16QAM	0.216	23.35
		4M51W7D	64QAM	0.167	22.23
		4M51W7D	256QAM	0.086	19.35
LTE – Band26 (10)	819.0	8M95G7D	QPSK	0.253	24.03
		8M97W7D	16QAM	0.231	23.64
		8M95W7D	64QAM	0.174	22.40
		8M97W7D	256QAM	0.084	19.26
LTE – Band26 (15)	821.5	13M5G7D	QPSK	0.251	24.00
		13M4W7D	16QAM	0.225	23.53
		13M5W7D	64QAM	0.174	22.40
		13M5W7D	256QAM	0.083	19.20

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2105-FC023-R1

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2105-FC023	May 26, 2021	- First Approval Report
HCT-RF-2105-FC023-R1	June 15, 2021	- Revised the Additional model(s). (SM-G990U1 added)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT.....	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 CONDUCTED OUTPUT POWER.....	8
3.3 RADIATED POWER.....	9
3.4 RADIATED SPURIOUS EMISSIONS	10
3.5 OCCUPIED BANDWIDTH.	11
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	12
3.7 CHANNEL EDGE.....	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	14
3.9 WORST CASE(RADIATED TEST)	15
3.10 WORST CASE(CONDUCTED TEST)	16
4. LIST OF TEST EQUIPMENT	17
5. MEASUREMENT UNCERTAINTY	18
6. SUMMARY OF TEST RESULTS	19
7. SAMPLE CALCULATION	20
8. TEST DATA	22
8.1 CONDUCTED OUTPUT POWER.....	22
8.2 EFFECTIVE RADIATED POWER.....	27
8.3 RADIATED SPURIOUS EMISSIONS	29
8.4 OCCUPIED BANDWIDTH	30
8.5 CONDUCTED SPURIOUS EMISSIONS	31
8.6 CHANNEL EDGE.....	31
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	32
8.8 STADDLE CHANNEL	37
8.8.1 CONDUCTED OUTPUT POWER.....	37
8.8.2 EFFECTIVE RADIATED POWER	41
8.8.3 RADIATED SPURIOUS EMISSIONS	42
8.8.4 CONDUCTED SPURIOUS EMISSIONS	43
8.8.5 CHANNEL EDGE(Part90)	43
8.8.6 BAND EDGE(Part22)	43
9. TEST PLOTS.....	44
10. TEST PLOTS (STRADDLE CHANNEL).....	93
11 ANNEX A_ TEST SETUP PHOTO	118

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG990U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§90, §22, §2
EUT Type:	Mobile Phone
Model(s):	SM-G990U
Additional Model(s):	SM-G990U1/DS, SM-G990U1
Tx Frequency:	814.7 MHz – 823.3 MHz (LTE – Band 26 (1.4 MHz)) 815.5 MHz – 822.5 MHz (LTE – Band 26 (3 MHz)) 816.5 MHz – 821.5 MHz (LTE – Band 26 (5 MHz)) 819.0 MHz (LTE – Band 26 (10 MHz)) 821.5 MHz (LTE – Band 26 (15 MHz))
Date(s) of Tests:	April 19, 2021 ~ May 18, 2021
Serial number:	Radiated: R3CR315S6MD Conducted: R3CR3117FBH

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS, CDMA(BC0, 1, 10) and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (HT20/40/80), Bluetooth, BT LE, NFC, WPT, mmWave(n260/261).

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 CONDUCTED OUTPUT POWER

Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

Test setup

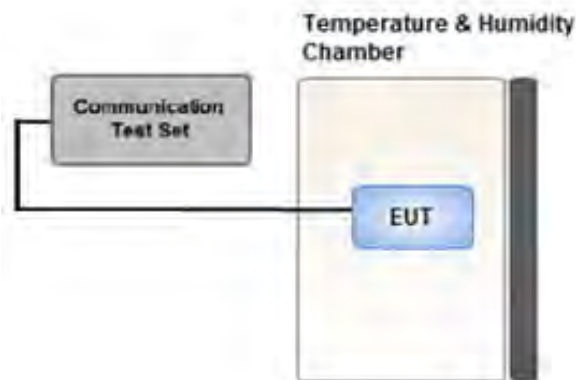

3.3 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.4 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.5 OCCUPIED BANDWIDTH.

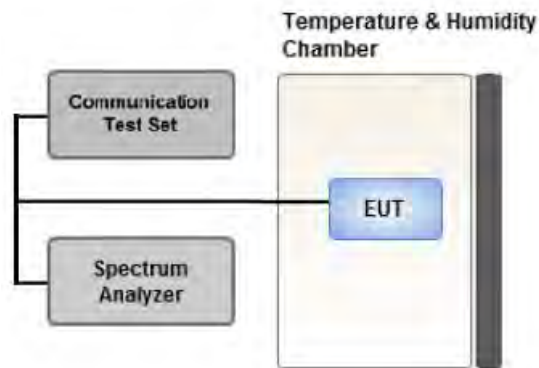

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

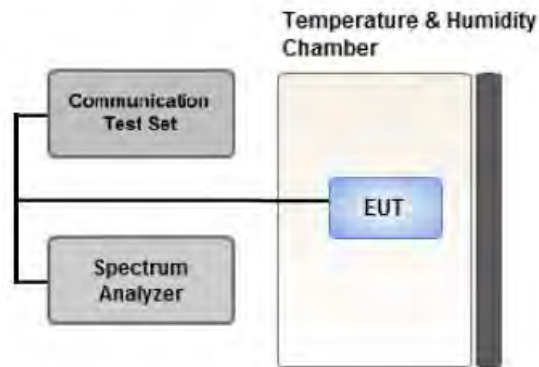

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 CHANNEL EDGE

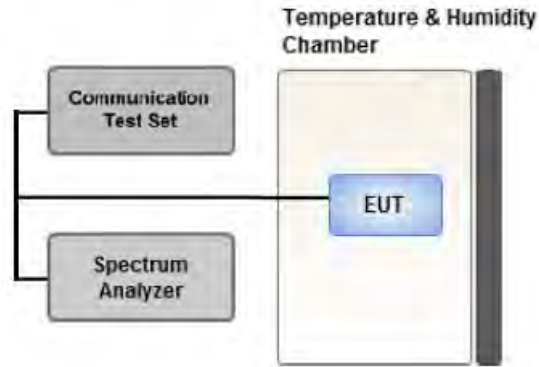

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW :
 - .- EA licensee's frequency block by up to and including 37.5 kHz : 300Hz
 - .- EA licensee's frequency block greater than 37.5 kHz : 100kHz
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

For 90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

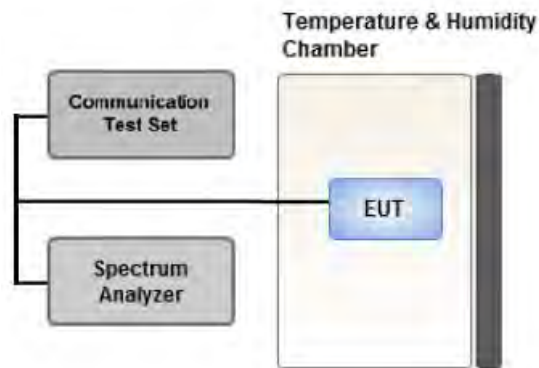

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
 - All modes of operation were investigated and the worst case configuration results are reported. (In the case of radiated spurious emissions, only the B.W result that confirmed the maximum radiated power was reported.)
 - The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
 - All modes of operation were tested and the worst case results are reported.
 - Please refer to the table below.
 - SM-G990U & additional models were tested and the worst case results are reported.
- (Worst case : SM-G990U)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	Y
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- SM-G990U & additional models were tested and the worst case results are reported.

(Worst case : SM-G990U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5	High	Full RB	0
	QPSK, 16QAM, 64QAM, 256QAM	10, 15	Mid	Full RB	0
Channel Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Mid	1	0
				1	49
		15	Mid	1	0
				1	74
1.4, 3, 5	Low, High	Full RB	0		
10, 15	Mid	Full RB	0		
Band Edge (Staddle Channel)	QPSK	1.4	Mid	1	5
		3	Mid	1	14
		5	Mid	1	24
		10	Mid	1	49
		15	Mid	1	74
		1.4, 3, 5, 10, 15	Mid	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5	Low, High	1	0
		10, 15	Mid	1	0

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	03/02/2021	Annual	03/02/2022
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	03/02/2021	Annual	03/02/2022
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/07/2021	Annual	04/07/2022
Hewlett Packard	E3632A/DC Power Supply	MY40004427	09/16/2020	Annual	09/16/2021
Schwarzbeck	UHAP/ Dipole Antenna	557	04/05/2021	Biennial	04/05/2023
Schwarzbeck	UHAP/ Dipole Antenna	558	04/05/2021	Biennial	04/05/2023
ESPEC	SU-642 / Chamber	93008124	03/15/2021	Annual	03/15/2022
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	10/13/2020	Biennial	10/13/2022
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY50200093	11/17/2020	Annual	11/17/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2020	Annual	06/04/2021
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2020	Annual	10/14/2021
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/26/2020	Annual	08/26/2021
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-333	03/19/2020	Biennial	03/19/2022
Schwarzbeck	VULB9160/ Bilog Antenna	3150	03/03/2021	Biennial	03/03/2023
Schwarzbeck	VULB9168/ Hybrid Antenna	760	02/22/2021	Biennial	02/22/2023
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6262116770	07/22/2020	Annual	07/22/2021
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/07/2021	Annual	01/07/2022
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/13/2020	Annual	07/13/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/04/2020	Annual	06/04/2021
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Channel Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §90.691	< 50 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5 kHz of Block Edge	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046 §90.635	< 100 Watts	PASS
Frequency stability / variation of ambient temperature	§2.1055, §90.213 §22.355	< 2.5 ppm	PASS

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §90.691 §22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				814.7MHz		823.3MHz		
				dBm	W	dBm	W	
1.4	QPSK	1	0	23.86	0.243	24.03	0.253	100
		1	3	24.02	0.252	24.11	0.258	100
		1	5	23.98	0.250	24.00	0.251	100
		3	0	23.89	0.245	23.95	0.248	100
		3	1	23.96	0.249	24.00	0.251	100
		3	3	23.91	0.246	24.00	0.251	100
		6	0	23.02	0.200	23.06	0.202	100
	16QAM	1	0	23.03	0.201	23.32	0.215	100
		1	3	23.40	0.219	23.48	0.223	100
		1	5	23.07	0.203	23.15	0.207	100
		3	0	23.08	0.203	23.17	0.207	100
		3	1	23.11	0.205	23.10	0.204	100
		3	3	23.01	0.200	23.22	0.210	100
		6	0	22.03	0.160	22.07	0.161	100
	64QAM	1	0	22.23	0.167	22.04	0.160	100
		1	3	22.22	0.167	22.35	0.172	100
		1	5	22.11	0.163	22.17	0.165	100
		3	0	22.01	0.159	22.01	0.159	100
		3	1	22.18	0.165	22.25	0.168	100
		3	3	22.11	0.163	22.26	0.168	100
		6	0	20.98	0.125	21.17	0.131	100
	256QAM	1	0	19.02	0.080	19.29	0.085	100
		1	3	19.21	0.083	19.26	0.084	100
		1	5	19.00	0.079	19.20	0.083	100
		3	0	19.14	0.082	19.16	0.082	100
		3	1	19.18	0.083	19.28	0.085	100
		3	3	19.11	0.081	19.19	0.083	100
		6	0	18.99	0.079	19.10	0.081	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				815.5MHz		822.5MHz		
				dBm	W	dBm	W	
3	QPSK	1	0	23.88	0.244	23.95	0.248	100
		1	7	23.93	0.247	23.94	0.248	100
		1	14	23.97	0.249	24.14	0.259	100
		8	0	23.13	0.206	23.15	0.207	100
		8	3	23.12	0.205	23.11	0.205	100
		8	7	23.10	0.204	23.21	0.209	100
		15	0	23.08	0.203	23.15	0.207	100
	16QAM	1	0	23.39	0.218	23.30	0.214	100
		1	7	23.31	0.214	23.33	0.215	100
		1	14	23.16	0.207	23.22	0.210	100
		8	0	22.11	0.163	22.12	0.163	100
		8	3	22.16	0.164	22.18	0.165	100
		8	7	22.15	0.164	22.23	0.167	100
		15	0	22.10	0.162	22.10	0.162	100
	64QAM	1	0	22.09	0.162	22.19	0.166	100
		1	7	22.15	0.164	22.28	0.169	100
		1	14	22.12	0.163	22.36	0.172	100
		8	0	21.14	0.130	21.09	0.129	100
		8	3	21.21	0.132	21.15	0.130	100
		8	7	21.09	0.129	21.25	0.133	100
		15	0	21.09	0.129	21.09	0.129	100
	256QAM	1	0	19.28	0.085	19.29	0.085	100
		1	7	19.17	0.083	19.27	0.085	100
		1	14	19.14	0.082	19.32	0.086	100
		8	0	19.08	0.081	19.10	0.081	100
		8	3	19.19	0.083	19.22	0.084	100
		8	7	19.15	0.082	19.25	0.084	100
		15	0	19.12	0.082	19.13	0.082	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				816.5MHz		821.5MHz		
				dBm	W	dBm	W	
5	QPSK	1	0	23.82	0.241	23.90	0.245	100
		1	12	23.93	0.247	23.96	0.249	100
		1	24	24.00	0.251	24.08	0.256	100
		12	0	23.11	0.205	23.13	0.206	100
		12	6	23.10	0.204	23.15	0.207	100
		12	11	23.11	0.205	23.17	0.207	100
		25	0	23.11	0.205	23.11	0.205	100
	16QAM	1	0	23.18	0.208	23.20	0.209	100
		1	12	23.26	0.212	23.30	0.214	100
		1	24	23.33	0.215	23.35	0.216	100
		12	0	22.16	0.164	22.19	0.166	100
		12	6	22.21	0.166	22.24	0.167	100
		12	11	22.15	0.164	22.17	0.165	100
		25	0	22.14	0.164	22.18	0.165	100
	64QAM	1	0	22.01	0.159	22.03	0.160	100
		1	12	22.17	0.165	22.19	0.166	100
		1	24	22.20	0.166	22.23	0.167	100
		12	0	21.14	0.130	21.17	0.131	100
		12	6	21.14	0.130	21.17	0.131	100
		12	11	21.17	0.131	21.20	0.132	100
		25	0	21.12	0.129	21.15	0.130	100
	256QAM	1	0	19.27	0.085	19.30	0.085	100
		1	12	19.31	0.085	19.33	0.086	100
		1	24	19.30	0.085	19.35	0.086	100
		12	0	19.11	0.081	19.14	0.082	100
		12	6	19.19	0.083	19.22	0.084	100
		12	11	19.21	0.083	19.24	0.084	100
		25	0	19.13	0.082	19.18	0.083	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				819MHz		
				dBm	W	
10	QPSK	1	0	24.03	0.253	100
		1	24	23.85	0.243	100
		1	49	24.01	0.252	100
		25	0	23.00	0.200	100
		25	12	23.20	0.209	100
		25	24	23.15	0.207	100
		50	0	23.05	0.202	100
	16QAM	1	0	23.58	0.228	100
		1	24	23.55	0.226	100
		1	49	23.64	0.231	100
		25	0	21.93	0.156	100
		25	12	22.25	0.168	100
		25	24	22.17	0.165	100
		50	0	22.10	0.162	100
	64QAM	1	0	22.00	0.158	100
		1	24	22.30	0.170	100
		1	49	22.40	0.174	100
		25	0	21.02	0.126	100
		25	12	21.30	0.135	100
		25	24	21.19	0.132	100
		50	0	21.08	0.128	100
	256QAM	1	0	19.00	0.079	100
		1	24	19.22	0.084	100
		1	49	19.07	0.081	100
		25	0	19.01	0.080	100
		25	12	19.26	0.084	100
		25	24	19.18	0.083	100
		50	0	19.18	0.083	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				821.5MHz		
				dBm	W	
15	QPSK	1	0	24.00	0.251	100
		1	36	23.91	0.246	100
		1	74	23.92	0.247	100
		36	0	23.01	0.200	100
		36	18	23.09	0.204	100
		36	39	23.14	0.206	100
		75	0	23.05	0.202	100
	16QAM	1	0	23.40	0.219	100
		1	36	23.43	0.220	100
		1	74	23.53	0.225	100
		36	0	22.04	0.160	100
		36	18	22.13	0.163	100
		36	39	22.12	0.163	100
		75	0	22.13	0.163	100
	64QAM	1	0	22.17	0.165	100
		1	36	22.25	0.168	100
		1	74	22.40	0.174	100
		36	0	21.10	0.129	100
		36	18	21.06	0.128	100
		36	39	21.11	0.129	100
		75	0	21.00	0.126	100
	256QAM	1	0	19.04	0.080	100
		1	36	19.19	0.083	100
		1	74	19.20	0.083	100
		36	0	19.05	0.080	100
		36	18	19.10	0.081	100
		36	39	19.11	0.081	100
		75	0	19.07	0.081	100

8.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
814.7	LTE B26/ 1.4 MHz	QPSK	-31.78	31.47	-10.43	1.39	V	< 100	0.092	19.65
		16QAM	-32.43	30.82	-10.43	1.39	V		0.079	19.00
		64QAM	-33.38	29.87	-10.43	1.39	V		0.064	18.05
		256QAM	-36.51	26.74	-10.43	1.39	V		0.031	14.92
823.3		QPSK	-31.76	31.82	-10.42	1.39	V		0.100	20.01
		16QAM	-32.35	31.23	-10.42	1.39	V		0.087	19.42
		64QAM	-33.46	30.12	-10.42	1.39	V		0.068	18.31
		256QAM	-36.46	27.12	-10.42	1.39	V		0.034	15.31

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
815.5	LTE B26/ 3 MHz	QPSK	-31.69	31.56	-10.43	1.39	V	< 100	0.094	19.74
		16QAM	-32.35	30.90	-10.43	1.39	V		0.081	19.08
		64QAM	-33.31	29.94	-10.43	1.39	V		0.065	18.12
		256QAM	-36.45	26.80	-10.43	1.39	V		0.031	14.98
822.5		QPSK	-31.99	31.52	-10.42	1.39	V		0.094	19.71
		16QAM	-32.60	30.91	-10.42	1.39	V		0.081	19.10
		64QAM	-33.73	29.78	-10.42	1.39	V		0.063	17.97
		256QAM	-36.78	26.73	-10.42	1.39	V		0.031	14.92

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
816.5	LTE B26/ 5 MHz	QPSK	-31.90	31.36	-10.43	1.39	V	< 100	0.090	19.54
		16QAM	-32.45	30.81	-10.43	1.39	V		0.079	18.99
		64QAM	-33.48	29.78	-10.43	1.39	V		0.062	17.96
		256QAM	-36.63	26.63	-10.43	1.39	V		0.030	14.81
821.5		QPSK	-31.87	31.59	-10.42	1.39	V		0.095	19.78
		16QAM	-32.45	31.01	-10.42	1.39	V		0.083	19.20
		64QAM	-33.54	29.92	-10.42	1.39	V		0.065	18.11
		256QAM	-36.69	26.77	-10.42	1.39	V		0.031	14.96

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
819.0	LTE B26/ 10 MHz	QPSK	-31.78	31.57	-10.43	1.39	V	< 100	0.094	19.75
		16QAM	-32.18	31.17	-10.43	1.39	V		0.086	19.35
		64QAM	-33.52	29.83	-10.43	1.39	V		0.063	18.01
		256QAM	-36.95	26.40	-10.43	1.39	V		0.029	14.58

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
821.5	LTE B26/ 15 MHz	QPSK	-31.81	31.65	-10.42	1.39	V	< 7.00	0.096	19.84
		16QAM	-31.98	31.48	-10.42	1.39	V		0.093	19.67
		64QAM	-33.53	29.93	-10.42	1.39	V		0.065	18.12
		256QAM	-36.86	26.60	-10.42	1.39	V		0.030	14.79

Note

1. Limit: None (for reporting purposes only)

8.3 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26697 (814.7)	1 629.40	-52.94	9.40	-62.37	1.98	H	-54.95	-13.00
	2 444.10	-53.61	10.47	-57.34	2.47	V	-49.34	-13.00
	3 258.80	-58.45	12.00	-59.10	2.88	V	-49.98	-13.00
26783 (823.3)	1 646.60	-53.03	9.48	-62.71	1.99	V	-55.22	-13.00
	2 469.90	-49.73	10.60	-53.86	2.47	H	-45.73	-13.00
	3 293.20	-57.27	12.20	-58.39	2.88	V	-49.07	-13.00

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 26	1.4 MHz	823.3	QPSK	6	0	1.0994
			16QAM			1.0904
			64QAM			1.0961
			256QAM			1.0862
	3 MHz	822.5	QPSK	15		2.7155
			16QAM			2.7077
			64QAM			2.6980
			256QAM			2.7029
	5 MHz	821.5	QPSK	25		4.4864
			16QAM			4.5037
			64QAM			4.5101
			256QAM			4.5107
	10 MHz	819.0	QPSK	50		8.9504
			16QAM			8.9713
			64QAM			8.9511
			256QAM			8.9664
	15 MHz	821.5	QPSK	75		13.455
			16QAM			13.441
			64QAM			13.456
			256QAM			13.451

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 45 ~ 64.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	814.7	3.7179	27.976	-67.341	-39.365	-13.00
		823.3	3.6775	27.976	-67.259	-39.283	
	3	815.5	3.6920	27.976	-67.245	-39.269	
		822.5	3.6810	27.976	-67.298	-39.322	
	5	816.5	3.6795	27.976	-67.358	-39.382	
		821.5	3.7094	27.976	-66.882	-38.906	
	10	819.0	3.7124	27.976	-67.214	-39.238	
	15	821.5	3.6735	27.976	-67.222	-39.246	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 85 ~ 92.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.6 CHANNEL EDGE

- Plots of the EUT's Band Edge are shown Page 65 ~ 84.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 814,700,000 Hz
- ▣ CHANNEL: 26697(1.4MHz)
- ▣ REFERENCE VOLTAGE: 3.88 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.880	+20(Ref)	814 700 006	0.0	0.000 000	0.000
100%		-30	814 699 995	-11.5	-0.000 001	-0.014
100%		-20	814 700 012	5.9	0.000 001	0.007
100%		-10	814 699 997	-9.2	-0.000 001	-0.011
100%		0	814 699 994	-11.9	-0.000 001	-0.015
100%		+10	814 699 992	-13.9	-0.000 002	-0.017
100%		+30	814 699 996	-10.1	-0.000 001	-0.012
100%		+40	814 699 999	-7.4	-0.000 001	-0.009
100%		+50	814 699 990	-15.8	-0.000 002	-0.019
Batt. Endpoint		3.650	+20	814 699 997	-9.5	-0.000 001

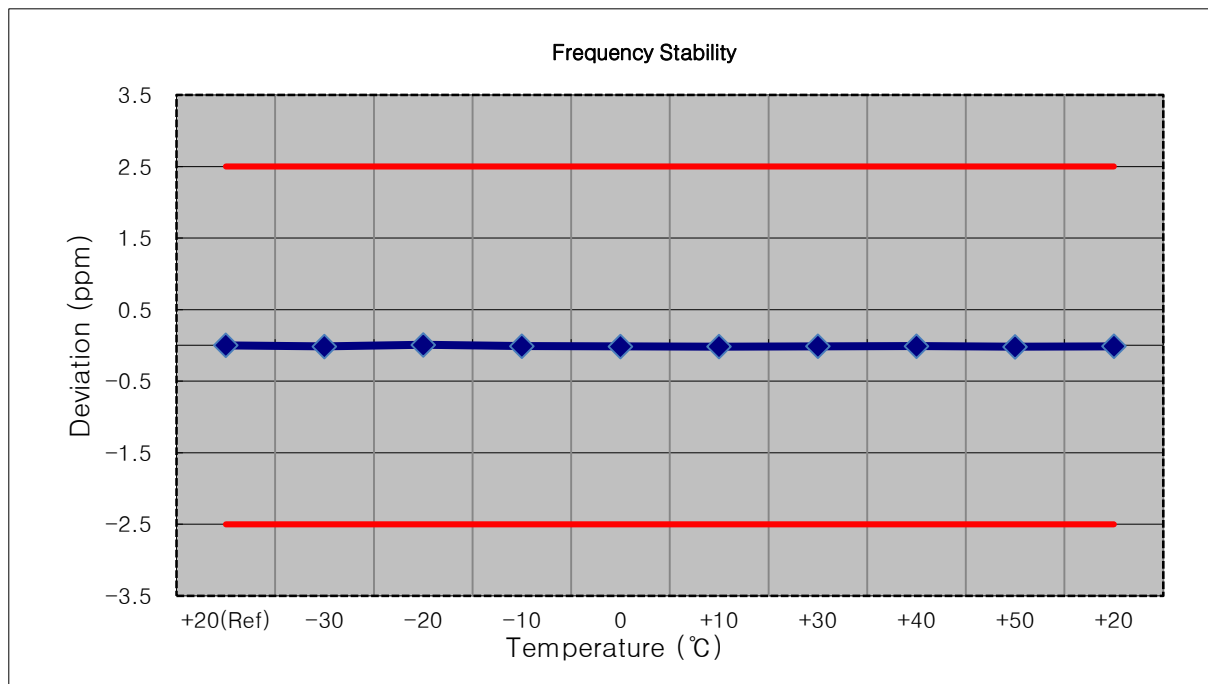


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 815,500,000 Hz
- ▣ CHANNEL: 26705(3MHz)
- ▣ REFERENCE VOLTAGE: 3.88 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.880	+20(Ref)	815 499 992	0.0	0.000 000	0.000
100%		-30	815 499 983	-9.7	-0.000 001	-0.012
100%		-20	815 499 983	-9.3	-0.000 001	-0.011
100%		-10	815 500 006	13.4	0.000 002	0.016
100%		0	815 499 981	-11.0	-0.000 001	-0.013
100%		+10	815 499 976	-16.8	-0.000 002	-0.021
100%		+30	815 499 975	-17.8	-0.000 002	-0.022
100%		+40	815 499 983	-9.8	-0.000 001	-0.012
100%		+50	815 499 976	-16.7	-0.000 002	-0.020
Batt. Endpoint		3.650	+20	815 499 986	-6.5	-0.000 001

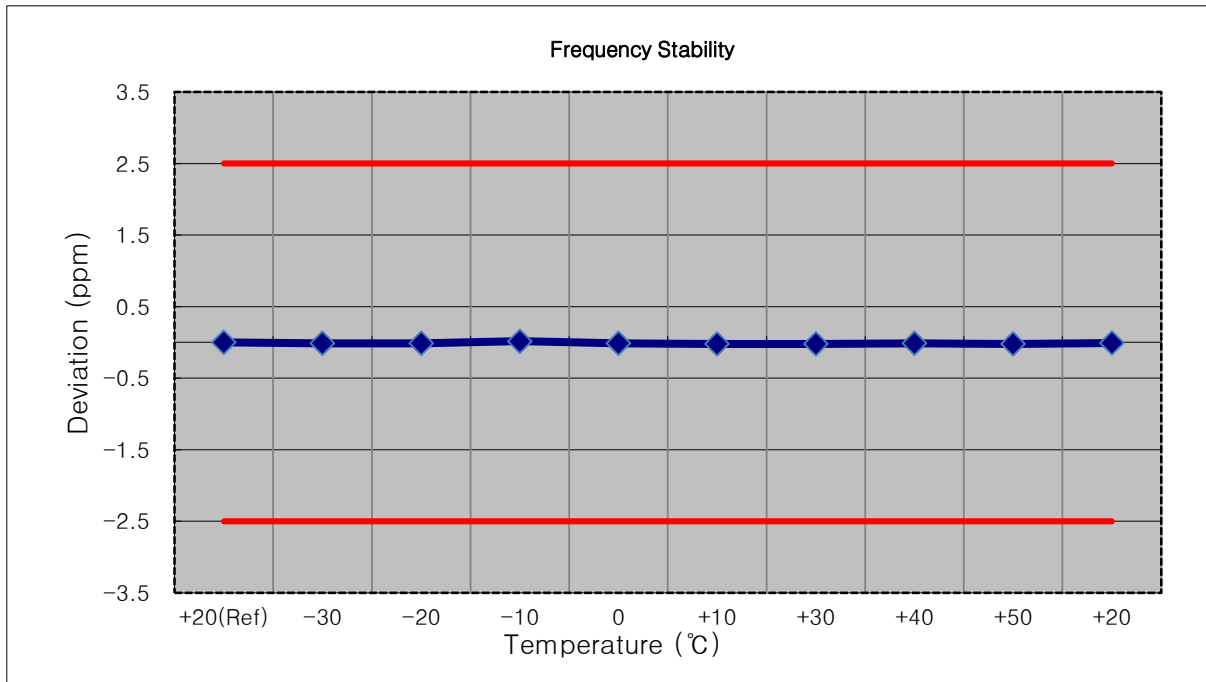


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 816,500,000 Hz
- ▣ CHANNEL: 26715(5MHz)
- ▣ REFERENCE VOLTAGE: 3.88 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.880	+20(Ref)	816 499 991	0.0	0.000 000	0.000
100%		-30	816 499 984	-6.4	-0.000 001	-0.008
100%		-20	816 499 982	-9.1	-0.000 001	-0.011
100%		-10	816 499 983	-8.0	-0.000 001	-0.010
100%		0	816 499 988	-2.8	0.000 000	-0.003
100%		+10	816 499 980	-10.9	-0.000 001	-0.013
100%		+30	816 499 982	-8.5	-0.000 001	-0.010
100%		+40	816 499 982	-8.4	-0.000 001	-0.010
100%		+50	816 500 003	12.4	0.000 002	0.015
Batt. Endpoint		3.650	+20	816 499 986	-4.8	-0.000 001

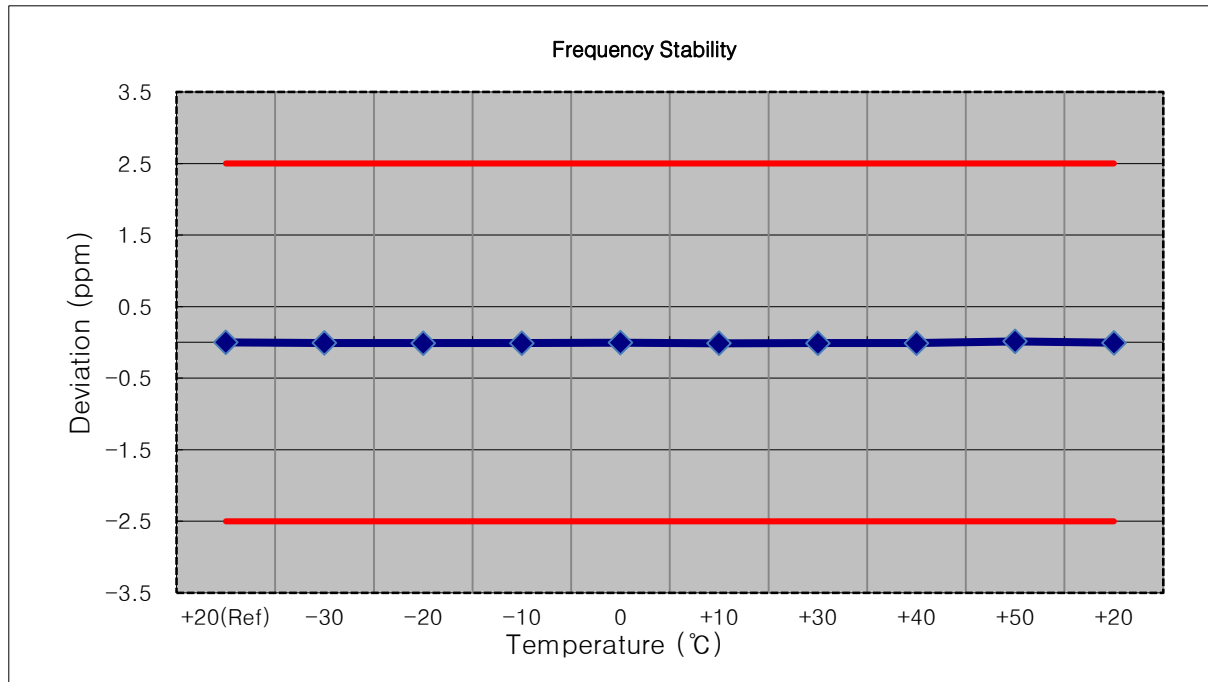


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 819,000,000 Hz
- ▣ CHANNEL: 26740(10 MHz)
- ▣ REFERENCE VOLTAGE: 3.88 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.880	+20(Ref)	818 999 993	0.0	0.000 000	0.000
100%		-30	818 999 983	-10.3	-0.000 001	-0.013
100%		-20	818 999 987	-5.8	-0.000 001	-0.007
100%		-10	818 999 983	-10.2	-0.000 001	-0.012
100%		0	818 999 983	-9.9	-0.000 001	-0.012
100%		+10	818 999 985	-8.5	-0.000 001	-0.010
100%		+30	818 999 983	-9.6	-0.000 001	-0.012
100%		+40	818 999 984	-8.9	-0.000 001	-0.011
100%		+50	818 999 984	-9.4	-0.000 001	-0.011
Batt. Endpoint		3.650	+20	818 999 985	-8.5	-0.000 001

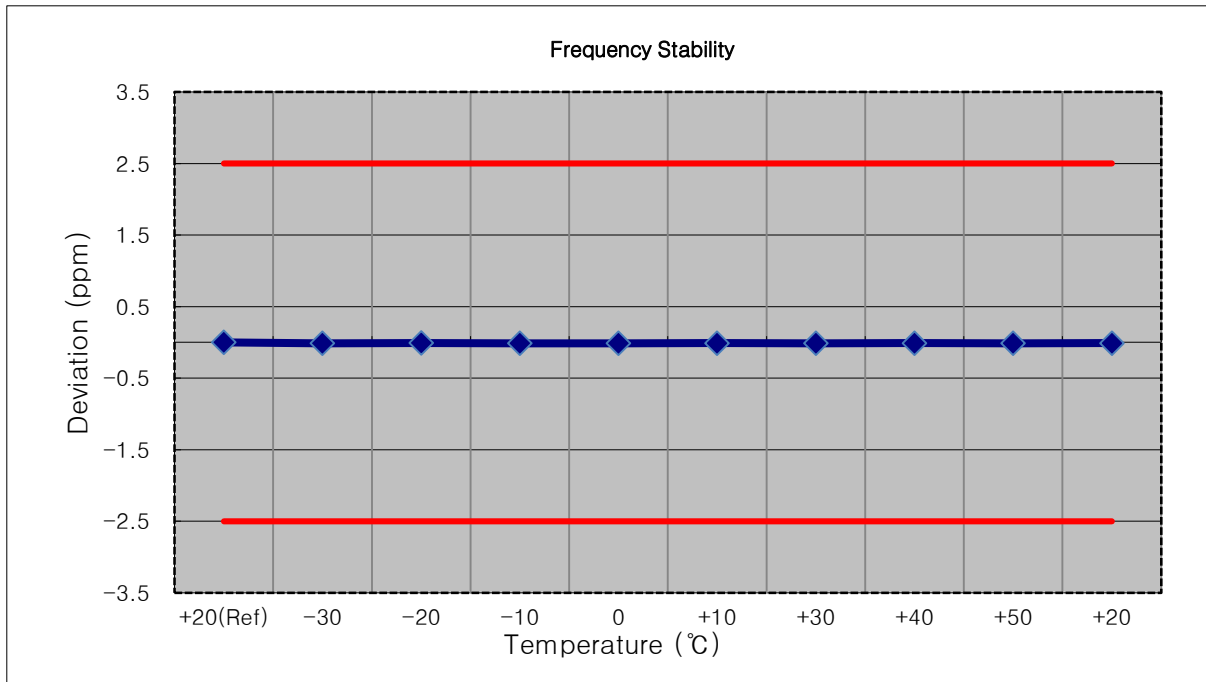

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 821,500,000 Hz
- ▣ CHANNEL: 26765(15 MHz)
- ▣ REFERENCE VOLTAGE: 3.88 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.880	+20(Ref)	821 499 993	0.0	0.000 000	0.000
100%		-30	821 499 981	-12.7	-0.000 002	-0.015
100%		-20	821 499 988	-5.9	-0.000 001	-0.007
100%		-10	821 499 981	-12.2	-0.000 001	-0.015
100%		0	821 499 986	-7.4	-0.000 001	-0.009
100%		+10	821 499 987	-6.3	-0.000 001	-0.008
100%		+30	821 499 985	-8.5	-0.000 001	-0.010
100%		+40	821 499 982	-11.4	-0.000 001	-0.014
100%		+50	821 499 989	-4.7	-0.000 001	-0.006
Batt. Endpoint		3.650	+20	821 499 987	-6.1	-0.000 001

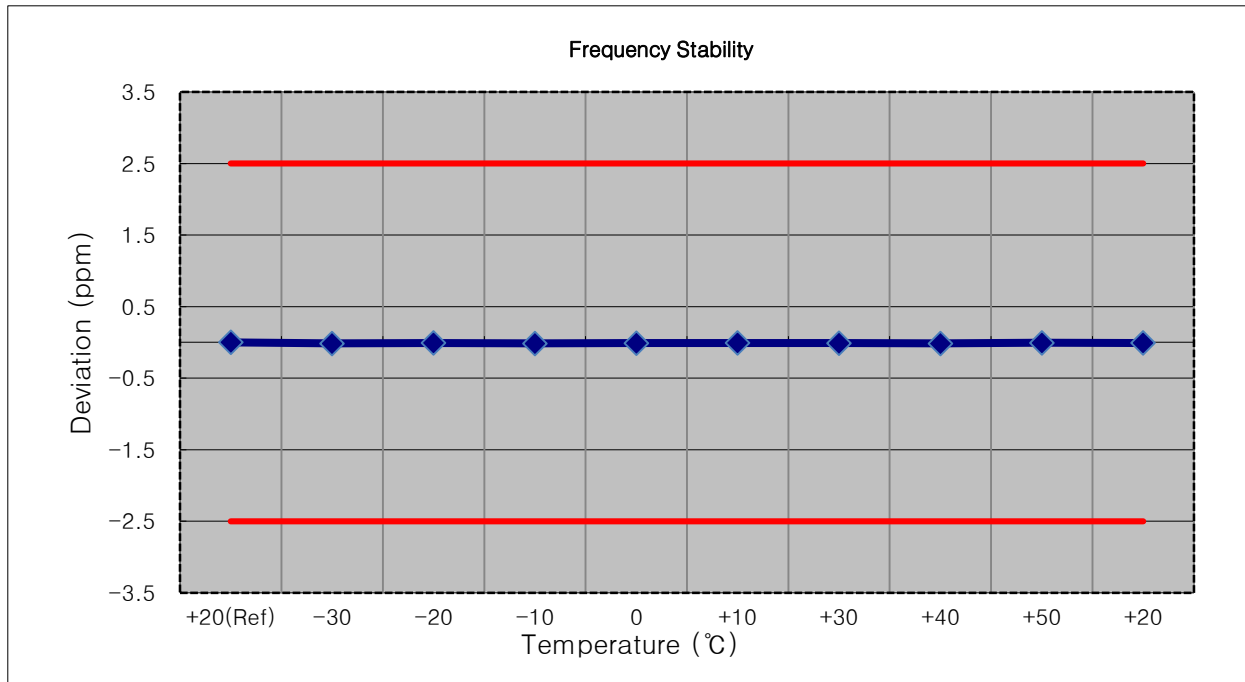

8.8 STADDLE CHANNEL

8.8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824MHz		
				dBm	W	
1.4	QPSK	1	0	24.06	0.255	100
		1	3	24.15	0.260	100
		1	5	24.03	0.253	100
		3	0	23.97	0.249	100
		3	1	24.03	0.253	100
		3	3	24.03	0.253	100
		6	0	23.08	0.203	100
	16QAM	1	0	23.35	0.216	100
		1	3	23.50	0.224	100
		1	5	23.15	0.207	100
		3	0	23.20	0.209	100
		3	1	23.13	0.206	100
		3	3	23.25	0.211	100
		6	0	22.10	0.162	100
	64QAM	1	0	22.07	0.161	100
		1	3	22.38	0.173	100
		1	5	22.20	0.166	100
		3	0	22.03	0.160	100
		3	1	22.28	0.169	100
		3	3	22.29	0.169	100
		6	0	21.10	0.129	100
	256QAM	1	0	19.31	0.085	100
		1	3	19.28	0.085	100
		1	5	19.22	0.084	100
		3	0	19.19	0.083	100
		3	1	19.31	0.085	100
		3	3	19.21	0.083	100
		6	0	19.11	0.081	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824MHz		
				dBm	W	
3	QPSK	1	0	24.00	0.251	100
		1	7	23.97	0.249	100
		1	14	24.15	0.260	100
		8	0	23.16	0.207	100
		8	3	23.14	0.206	100
		8	7	23.22	0.210	100
		15	0	23.18	0.208	100
	16QAM	1	0	23.33	0.215	100
		1	7	23.36	0.217	100
		1	14	23.27	0.212	100
		8	0	22.11	0.162	100
		8	3	22.20	0.166	100
		8	7	22.26	0.168	100
		15	0	22.13	0.163	100
	64QAM	1	0	22.20	0.166	100
		1	7	22.30	0.170	100
		1	14	22.38	0.173	100
		8	0	21.11	0.129	100
		8	3	21.18	0.131	100
		8	7	21.29	0.135	100
		15	0	21.13	0.130	100
	256QAM	1	0	19.31	0.085	100
		1	7	19.30	0.085	100
		1	14	19.35	0.086	100
		8	0	19.15	0.082	100
		8	3	19.22	0.084	100
		8	7	19.25	0.084	100
		15	0	19.16	0.082	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824MHz		
				dBm	W	
5	QPSK	1	0	24.05	0.254	100
		1	12	24.03	0.253	100
		1	24	24.08	0.256	100
		12	0	23.14	0.206	100
		12	6	23.28	0.213	100
		12	11	23.20	0.209	100
		25	0	23.08	0.203	100
	16QAM	1	0	23.44	0.221	100
		1	12	23.51	0.224	100
		1	24	23.41	0.219	100
		12	0	22.18	0.165	100
		12	6	22.25	0.168	100
		12	11	22.25	0.168	100
		25	0	22.14	0.164	100
	64QAM	1	0	22.48	0.177	100
		1	12	22.28	0.169	100
		1	24	22.40	0.174	100
		12	0	21.15	0.130	100
		12	6	21.19	0.132	100
		12	11	21.20	0.132	100
		25	0	21.23	0.133	100
	256QAM	1	0	19.25	0.084	100
		1	12	19.23	0.084	100
		1	24	19.24	0.084	100
		12	0	19.20	0.083	100
		12	6	19.23	0.084	100
		12	11	19.22	0.084	100
		25	0	19.11	0.081	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824MHz		
				dBm	W	
10	QPSK	1	0	24.18	0.262	100
		1	24	24.05	0.254	100
		1	49	24.08	0.256	100
		25	0	23.10	0.204	100
		25	12	23.11	0.205	100
		25	24	23.18	0.208	100
		50	0	23.09	0.204	100
	16QAM	1	0	23.60	0.229	100
		1	24	23.60	0.229	100
		1	49	23.48	0.223	100
		25	0	21.96	0.157	100
		25	12	22.13	0.163	100
		25	24	22.21	0.166	100
		50	0	22.05	0.160	100
	64QAM	1	0	22.22	0.167	100
		1	24	22.28	0.169	100
		1	49	22.45	0.176	100
		25	0	21.11	0.129	100
		25	12	21.22	0.132	100
		25	24	21.22	0.132	100
		50	0	21.03	0.127	100
	256QAM	1	0	19.22	0.084	100
		1	24	19.41	0.087	100
		1	49	19.24	0.084	100
		25	0	19.06	0.081	100
		25	12	19.15	0.082	100
		25	24	19.18	0.083	100
		50	0	19.06	0.081	100

8.8.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.0	LTE B26/ 1.4 MHz	QPSK	-31.72	31.85	-10.42	1.39	V	< 7.00	0.101	20.04
		16QAM	-32.34	31.23	-10.42	1.39	V		0.087	19.42
		64QAM	-33.44	30.13	-10.42	1.39	V		0.068	18.32
		256QAM	-36.47	27.10	-10.42	1.39	V		0.034	15.29

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.0	LTE B26/ 3 MHz	QPSK	-31.64	31.93	-10.42	1.39	V	< 7.00	0.103	20.12
		16QAM	-32.23	31.34	-10.42	1.39	V		0.090	19.53
		64QAM	-33.37	30.20	-10.42	1.39	V		0.069	18.39
		256QAM	-36.42	27.15	-10.42	1.39	V		0.034	15.34

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.0	LTE B26/ 5 MHz	QPSK	-31.67	31.90	-10.42	1.39	V	< 7.00	0.102	20.09
		16QAM	-32.29	31.28	-10.42	1.39	V		0.088	19.47
		64QAM	-33.37	30.20	-10.42	1.39	V		0.069	18.39
		256QAM	-36.50	27.07	-10.42	1.39	V		0.034	15.26

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.0	LTE B26/ 10 MHz	QPSK	-31.59	31.98	-10.42	1.39	V	< 7.00	0.104	20.17
		16QAM	-32.05	31.52	-10.42	1.39	V		0.093	19.71
		64QAM	-33.34	30.23	-10.42	1.39	V		0.069	18.42
		256QAM	-36.70	26.87	-10.42	1.39	V		0.032	15.06

8.8.3 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26790 (824.0)	1 648.00	-53.37	9.50	-62.98	1.99	H	-55.47	-13.00
	2 472.00	-49.79	10.60	-53.92	2.47	H	-45.79	-13.00
	3 296.00	-58.91	12.25	-59.99	2.89	V	-50.63	-13.00

8.8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	824.0	3.7089	27.976	-67.262	-39.286	-13.00
	3		3.6765	27.976	-66.831	-38.855	
	5		3.7010	27.976	-67.191	-39.215	
	10		3.6860	27.976	-67.517	-39.541	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 94 ~ 97.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131

8.8.5 CHANNEL EDGE(Part90)

- Test Channel : 26790(824.0MHz)

Plots of the EUT's Band Edge are shown Page 98 ~ 109.


8.8.6 BAND EDGE(Part22)

- Test Channel : 26790(824.0MHz)


- Plots of the EUT's Band Edge are shown Page 110 ~ 117.

9. TEST PLOTS


BAND 26. Occupied Bandwidth Plot (1.4M BW Ch.26783 QPSK RB 6_0)

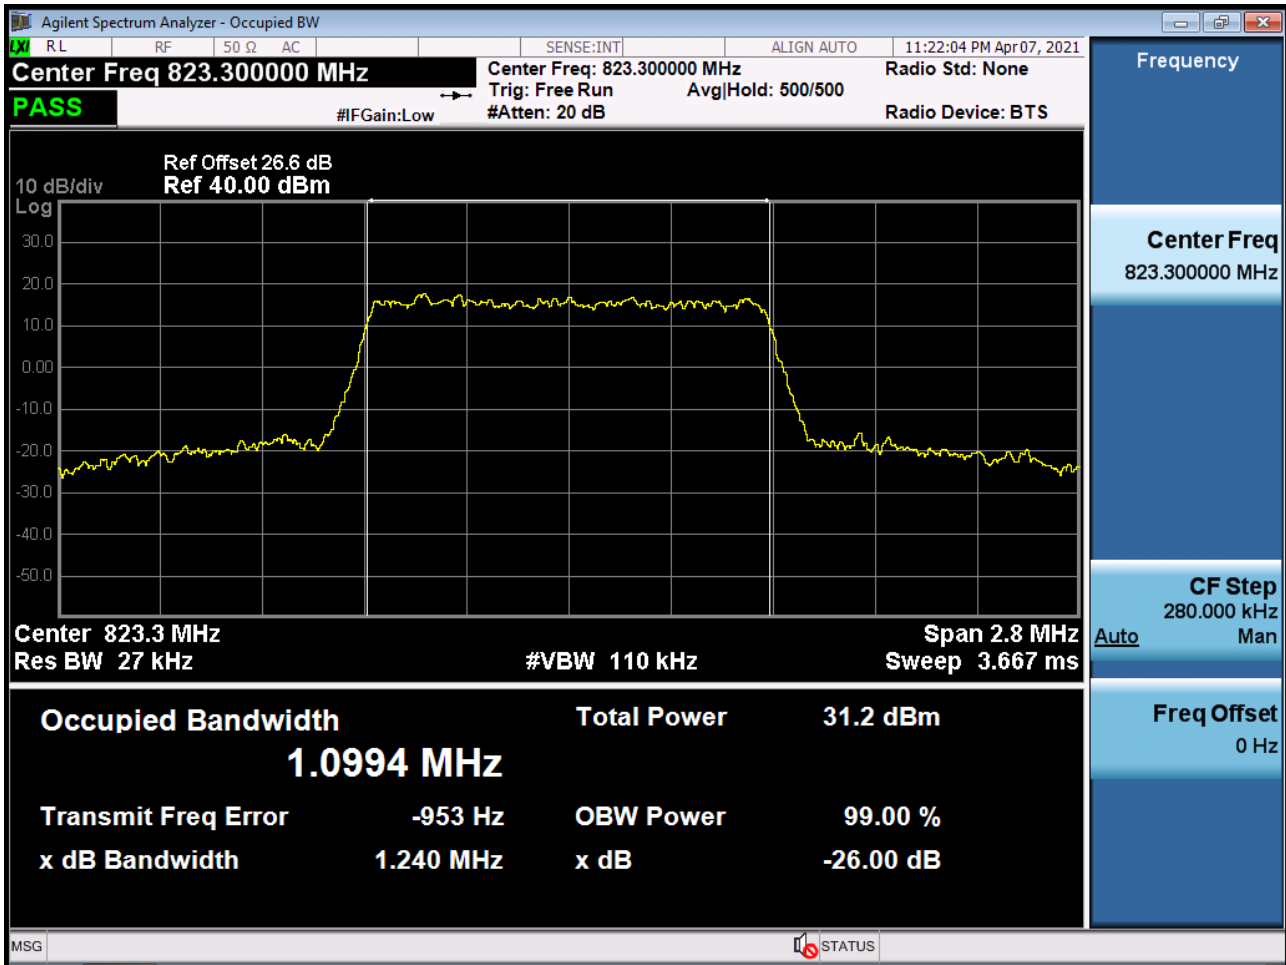


BAND 26. Occupied Bandwidth Plot (1.4M BW Ch.26783 16QAM RB 6_0)

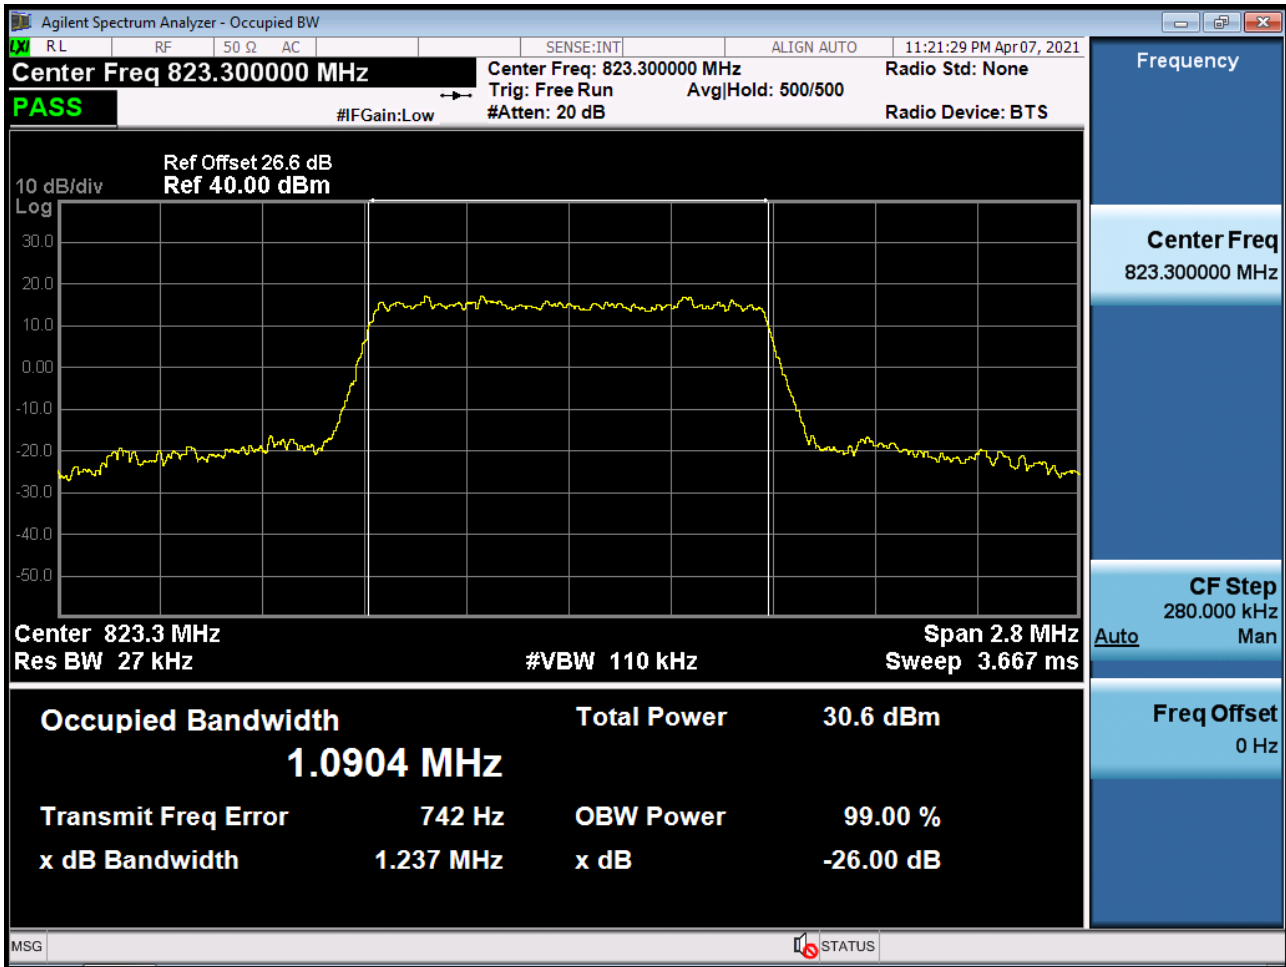


BAND 26. Occupied Bandwidth Plot (1.4M BW Ch.26783 64QAM RB 6_0)

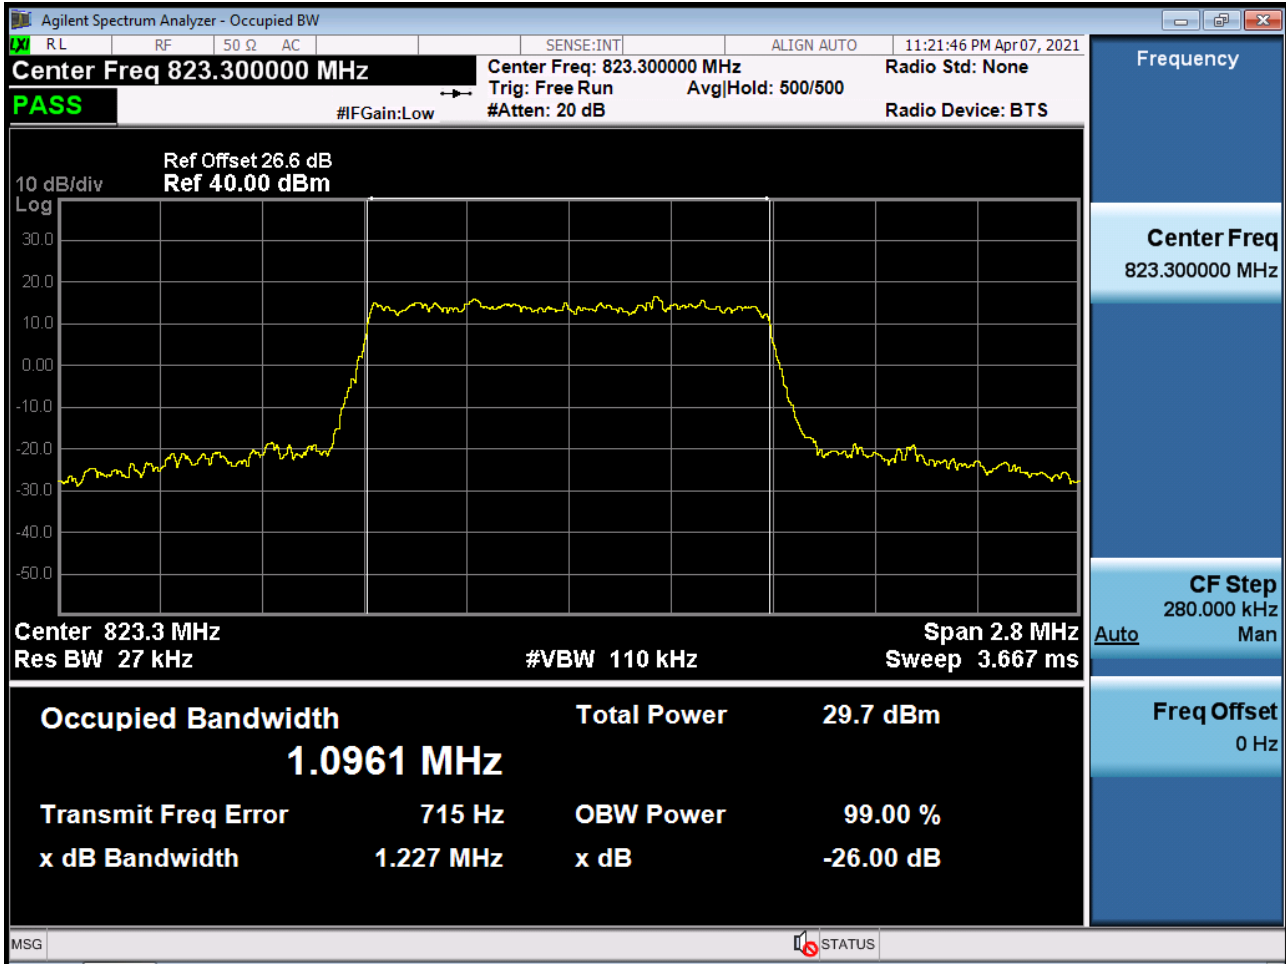


BAND 26. Occupied Bandwidth Plot (1.4M BW Ch.26783 256QAM RB 6_0)

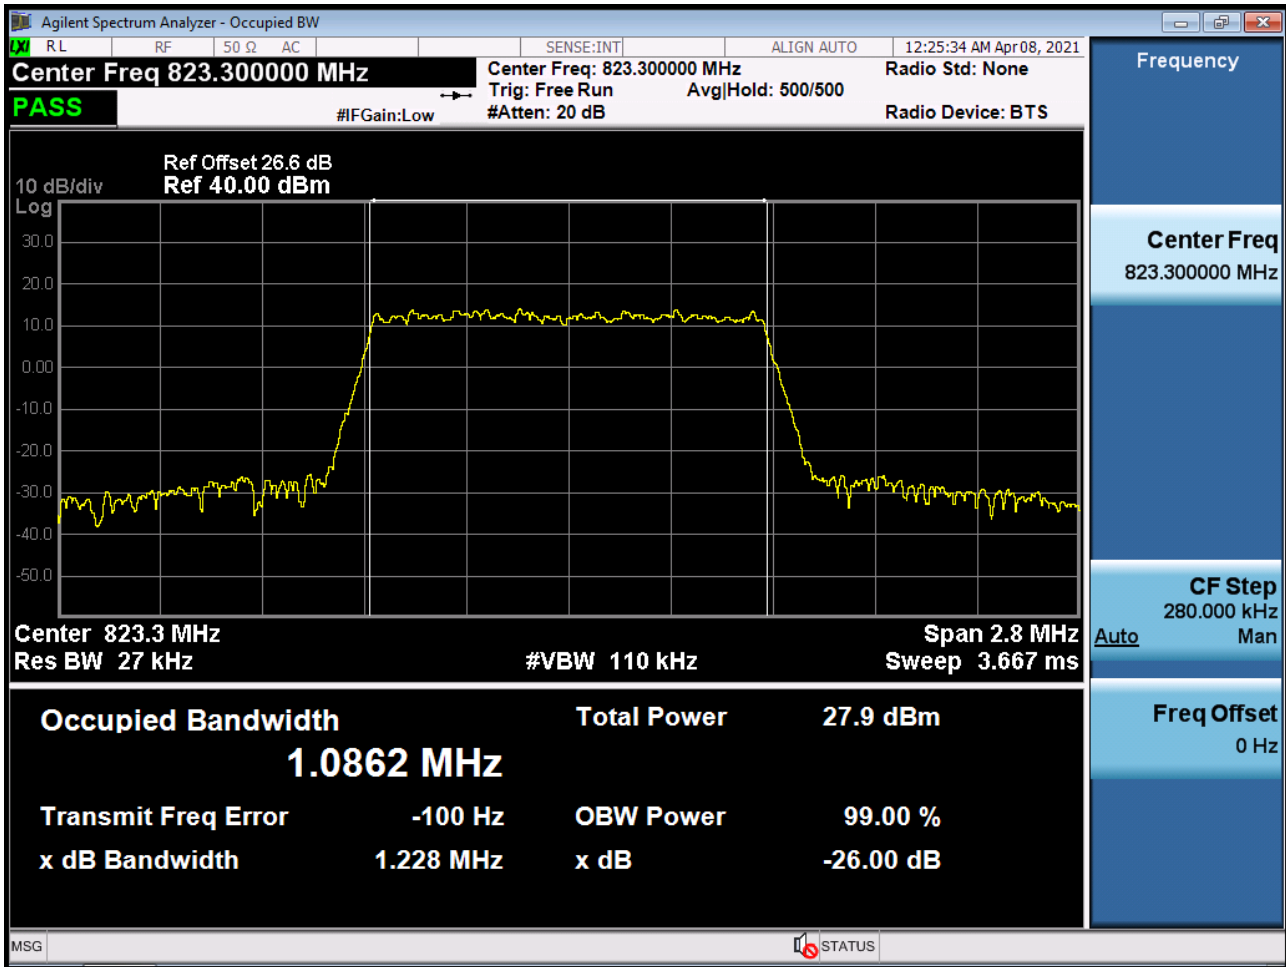


BAND 26. Occupied Bandwidth Plot (3M BW Ch.26775 QPSK RB 15_0)

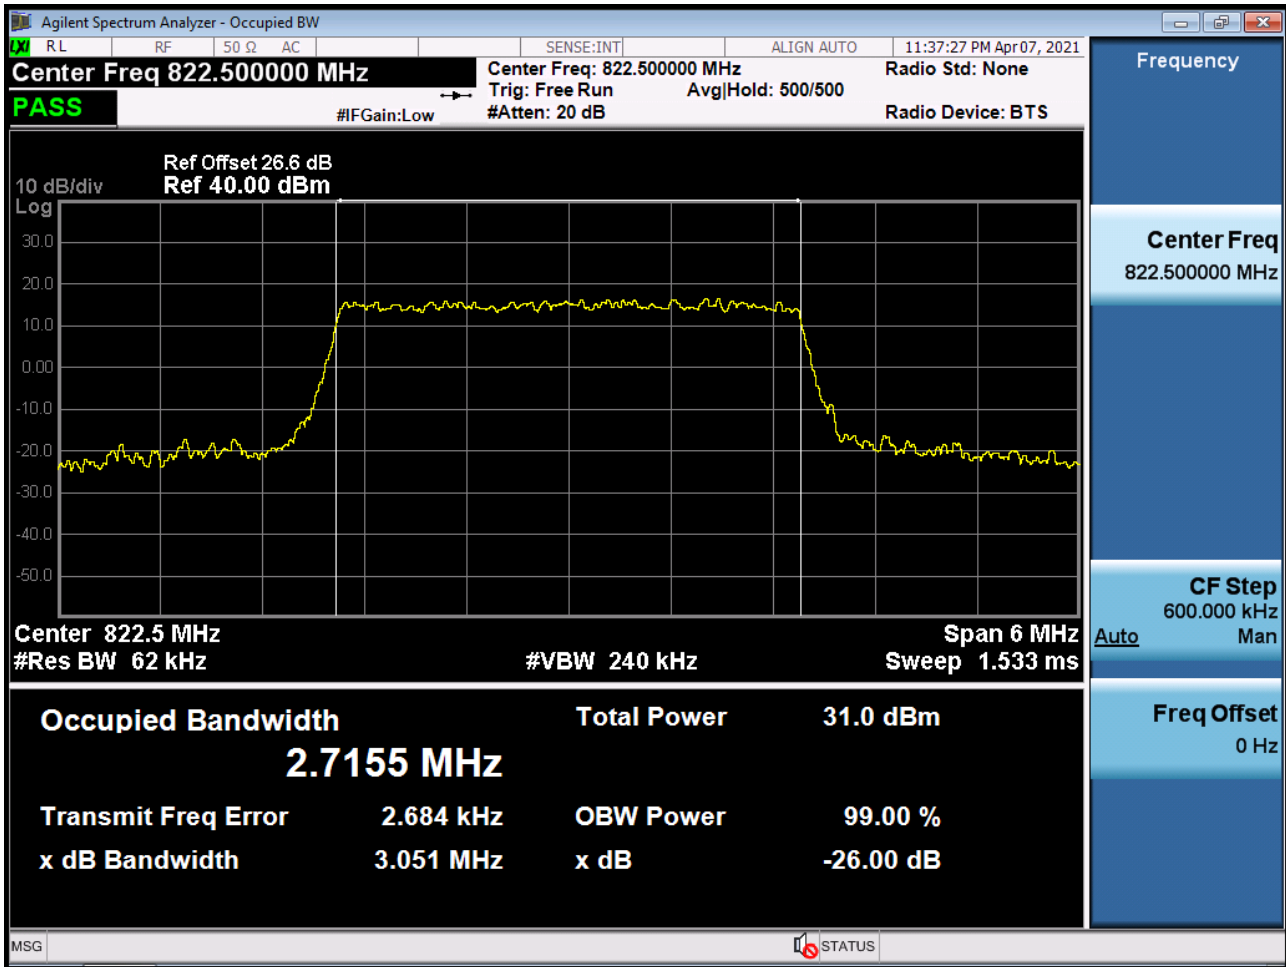


BAND 26. Occupied Bandwidth Plot (3M BW Ch.26775 16QAM RB 15_0)

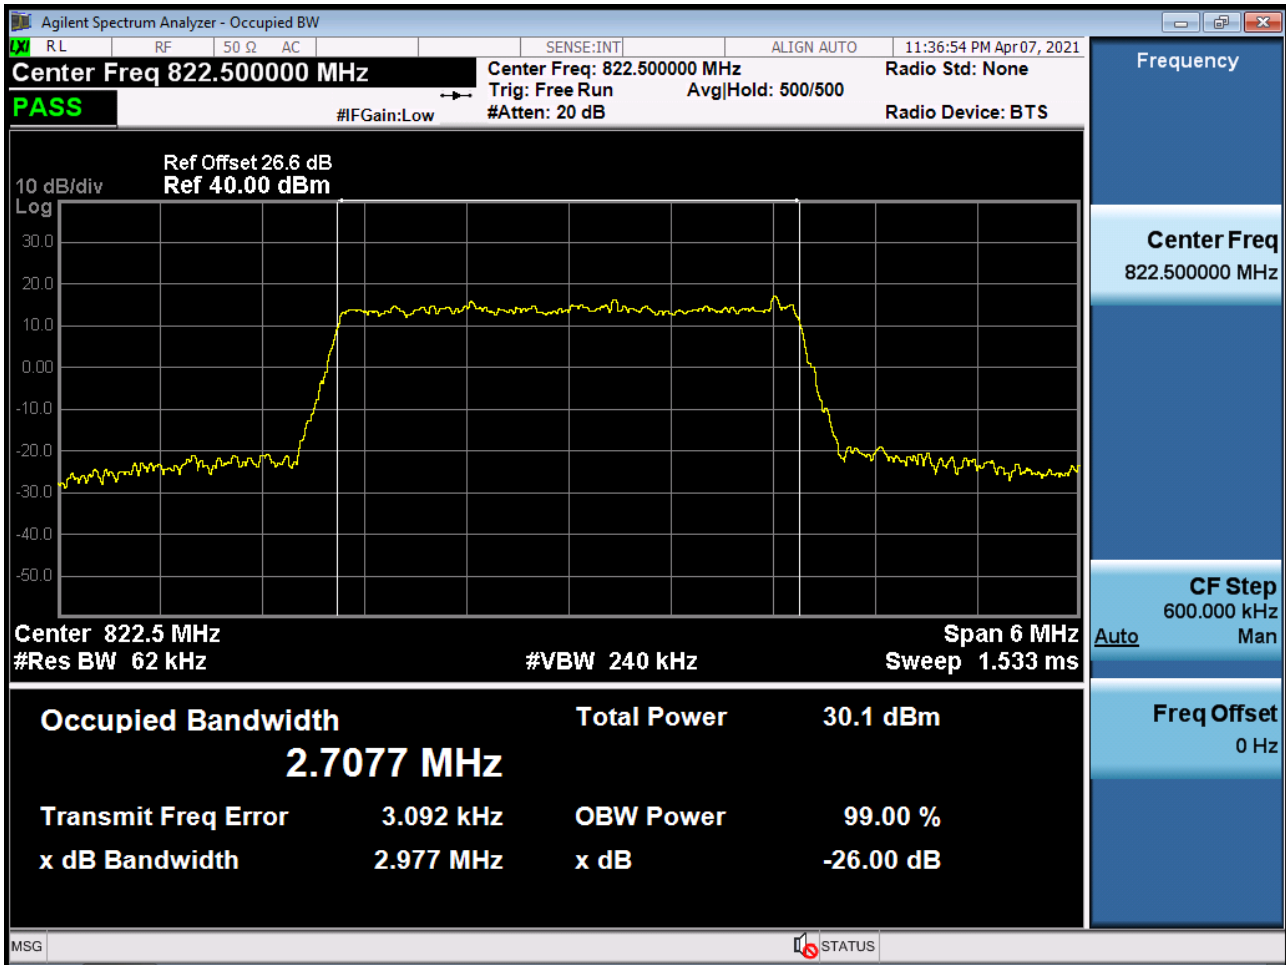


BAND 26. Occupied Bandwidth Plot (3M BW Ch.26775 64QAM RB 15_0)

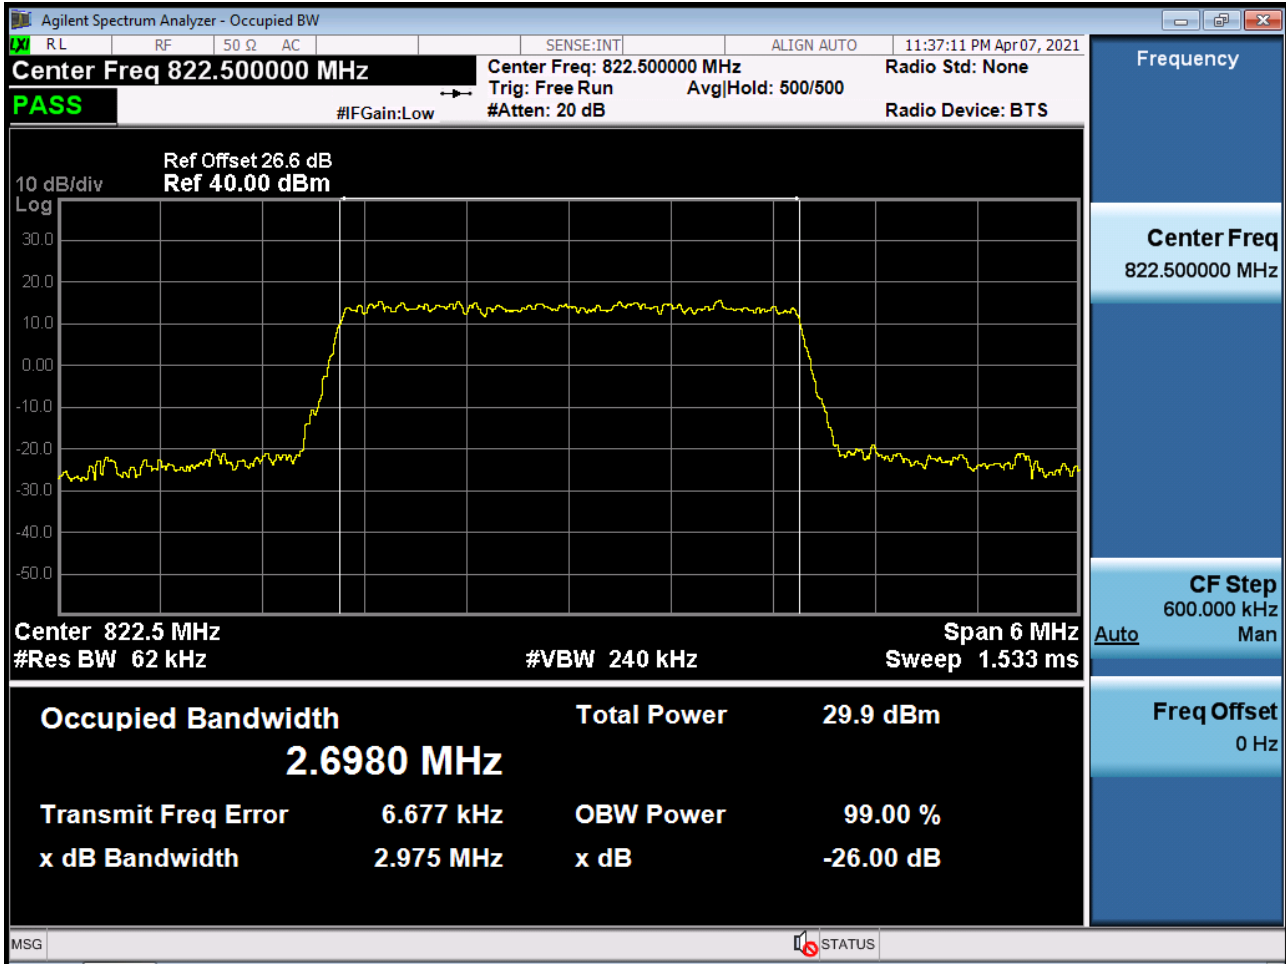


BAND 26. Occupied Bandwidth Plot (3M BW Ch.26775 256QAM RB 15_0)

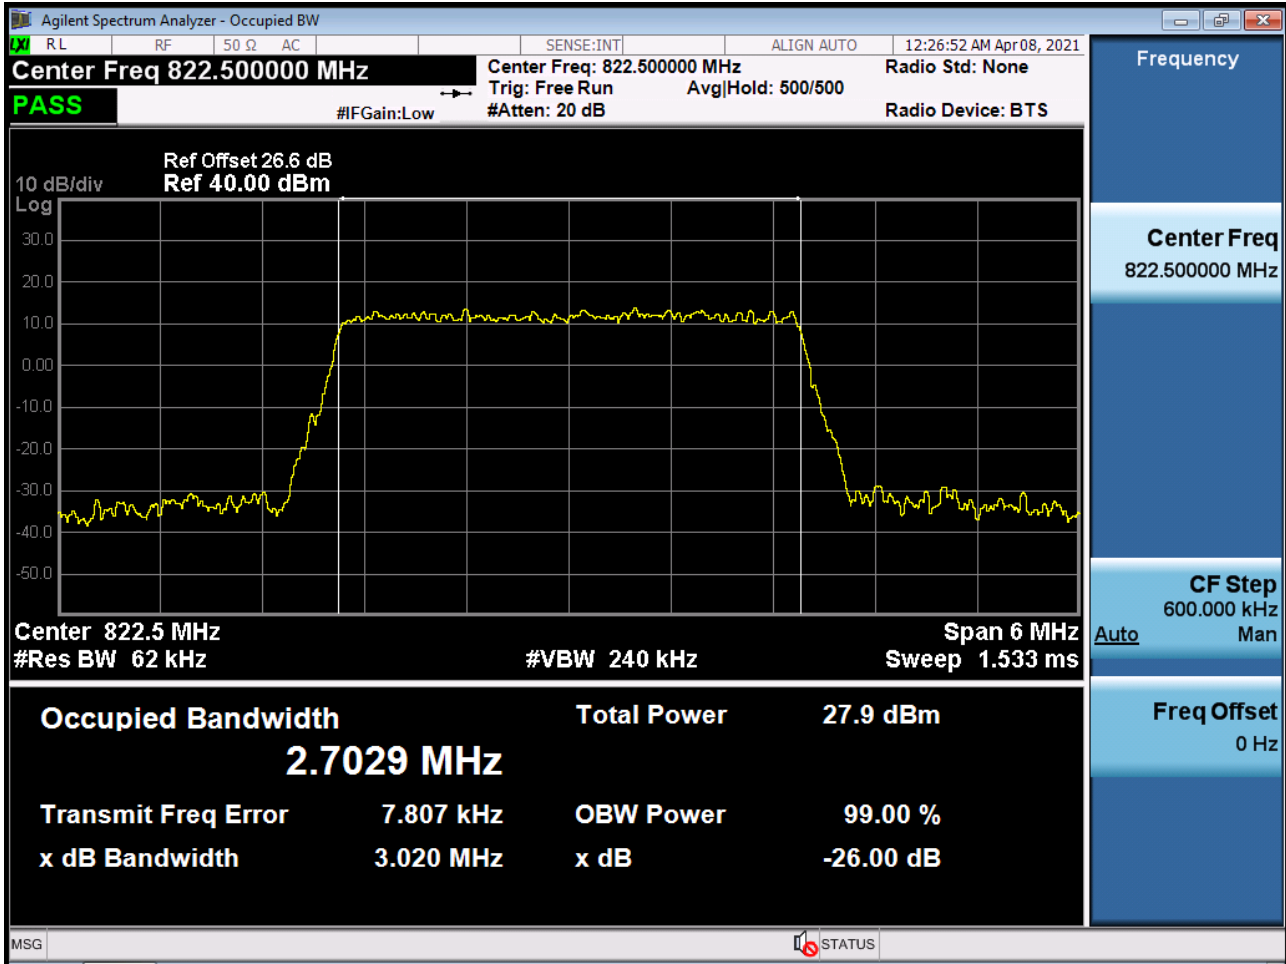


BAND 26. Occupied Bandwidth Plot (5M BW Ch.26765 QPSK RB 25_0)

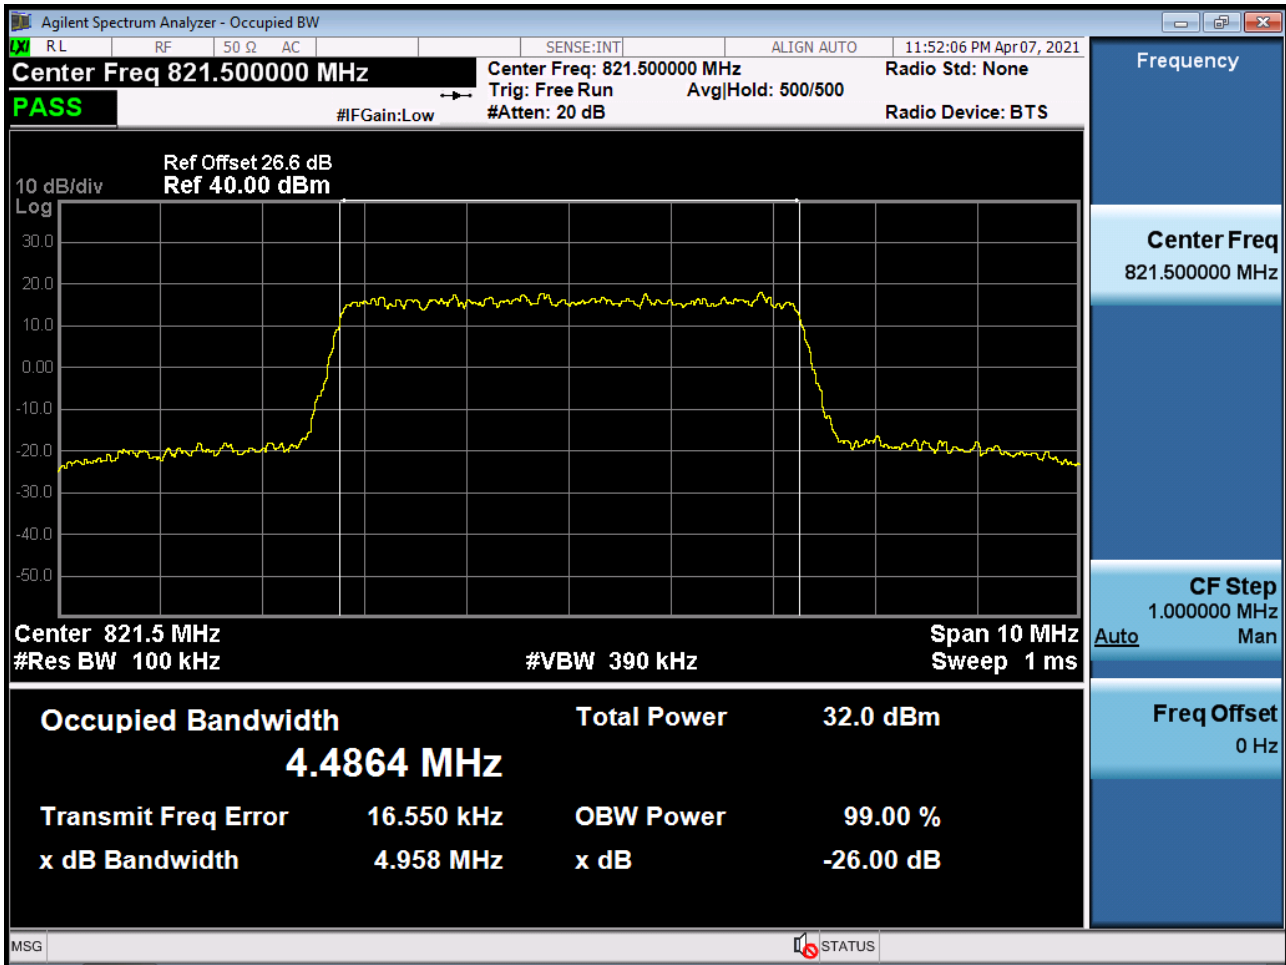


BAND 26. Occupied Bandwidth Plot (5M BW Ch.26765 16QAM RB 25_0)

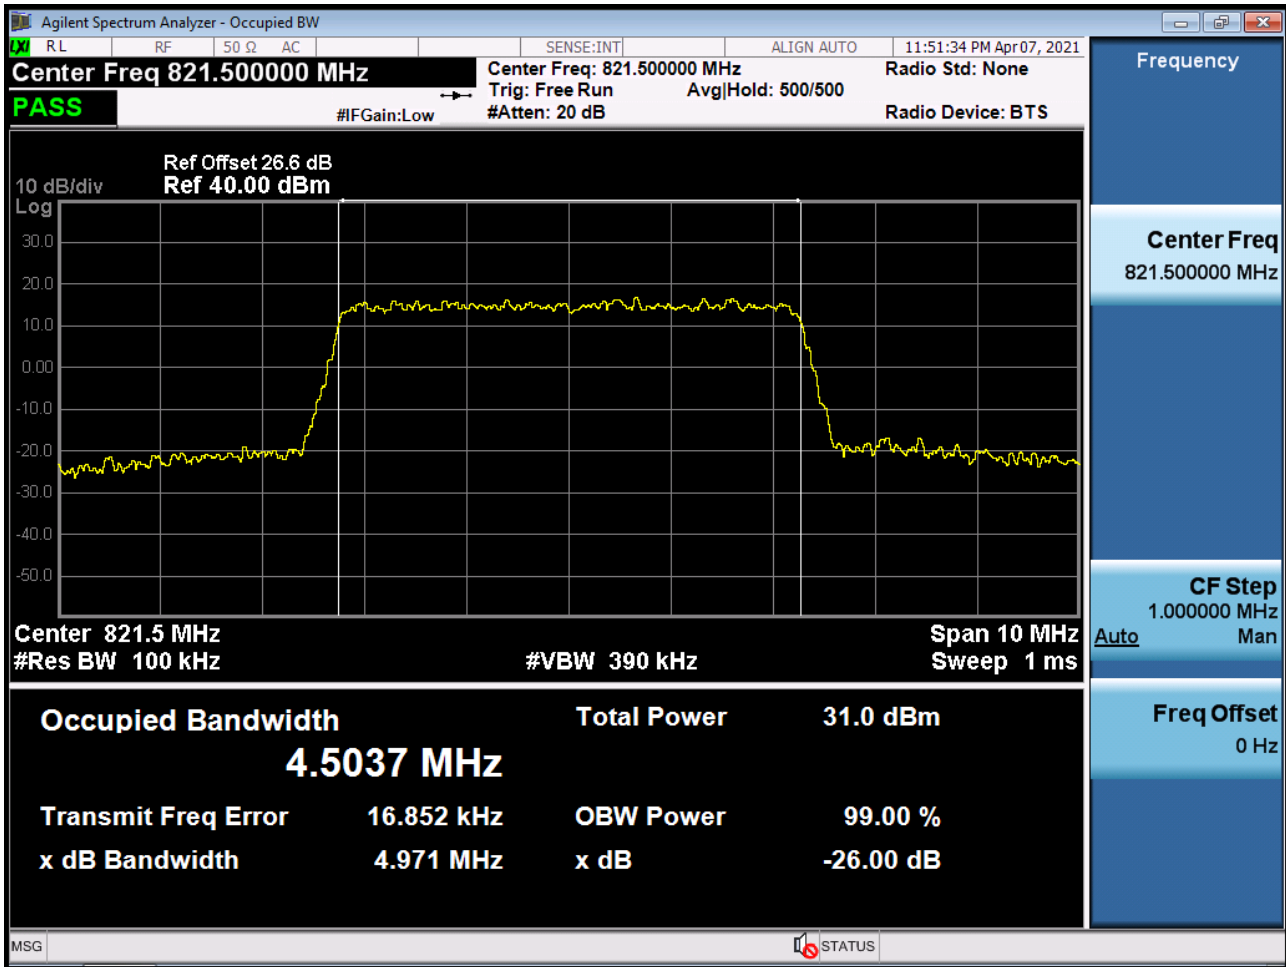


BAND 26. Occupied Bandwidth Plot (5M BW Ch.26765 64QAM RB 25_0)

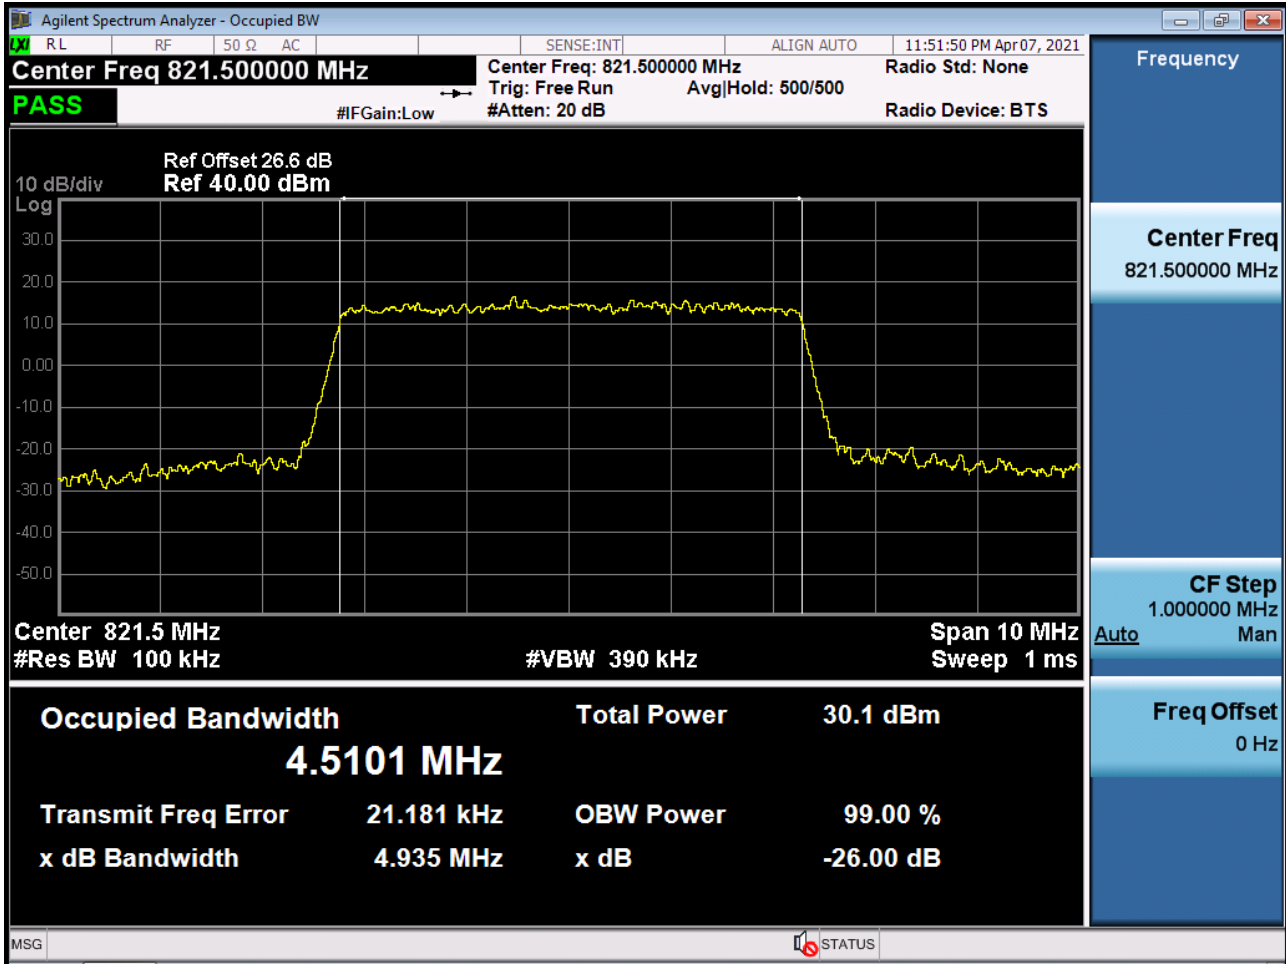


BAND 26. Occupied Bandwidth Plot (5M BW Ch.26765 256QAM RB 25_0)

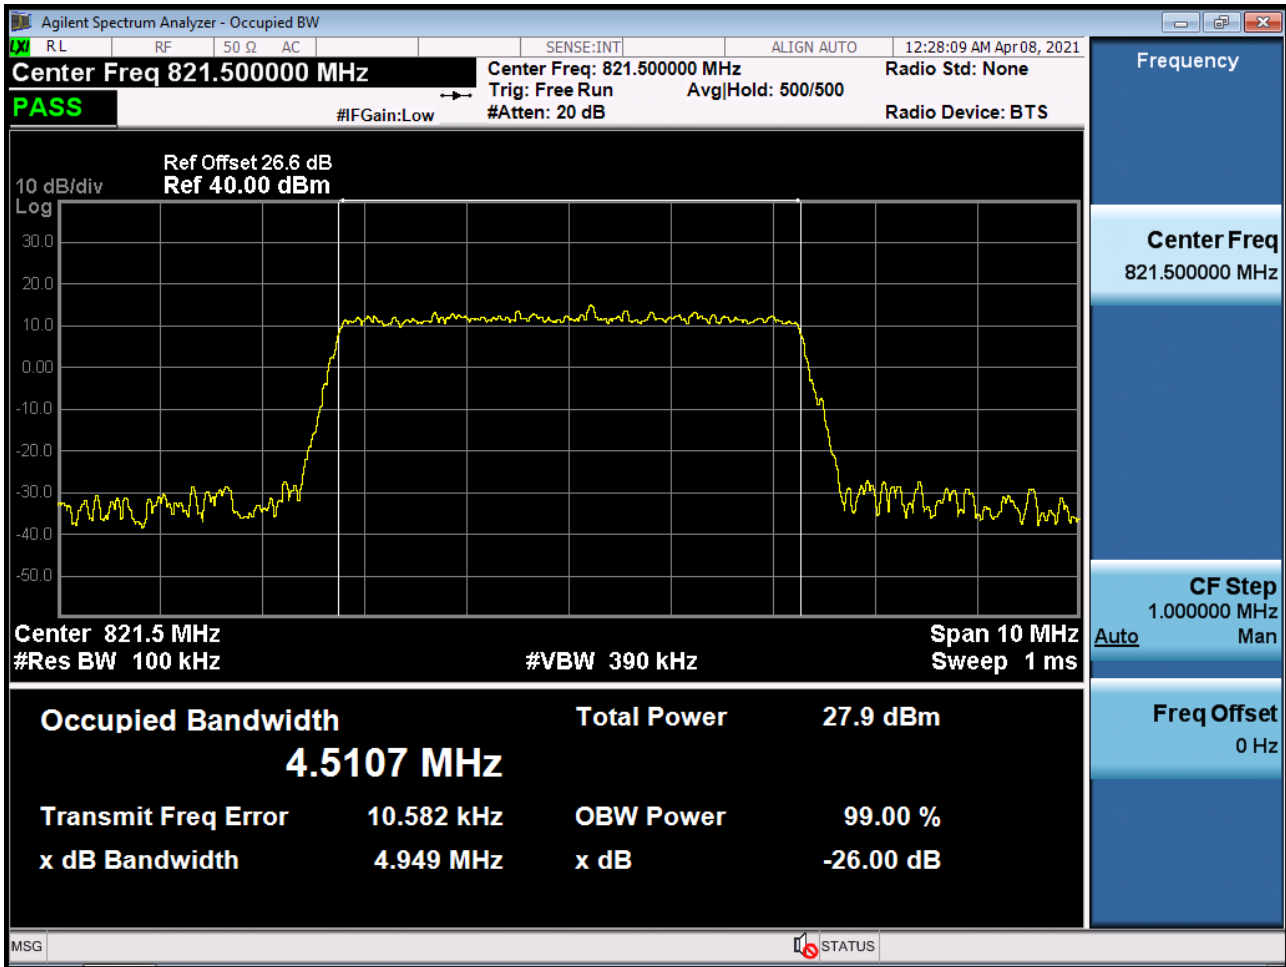


BAND 26. Occupied Bandwidth Plot (10M BW Ch.26740 QPSK RB 50_0)

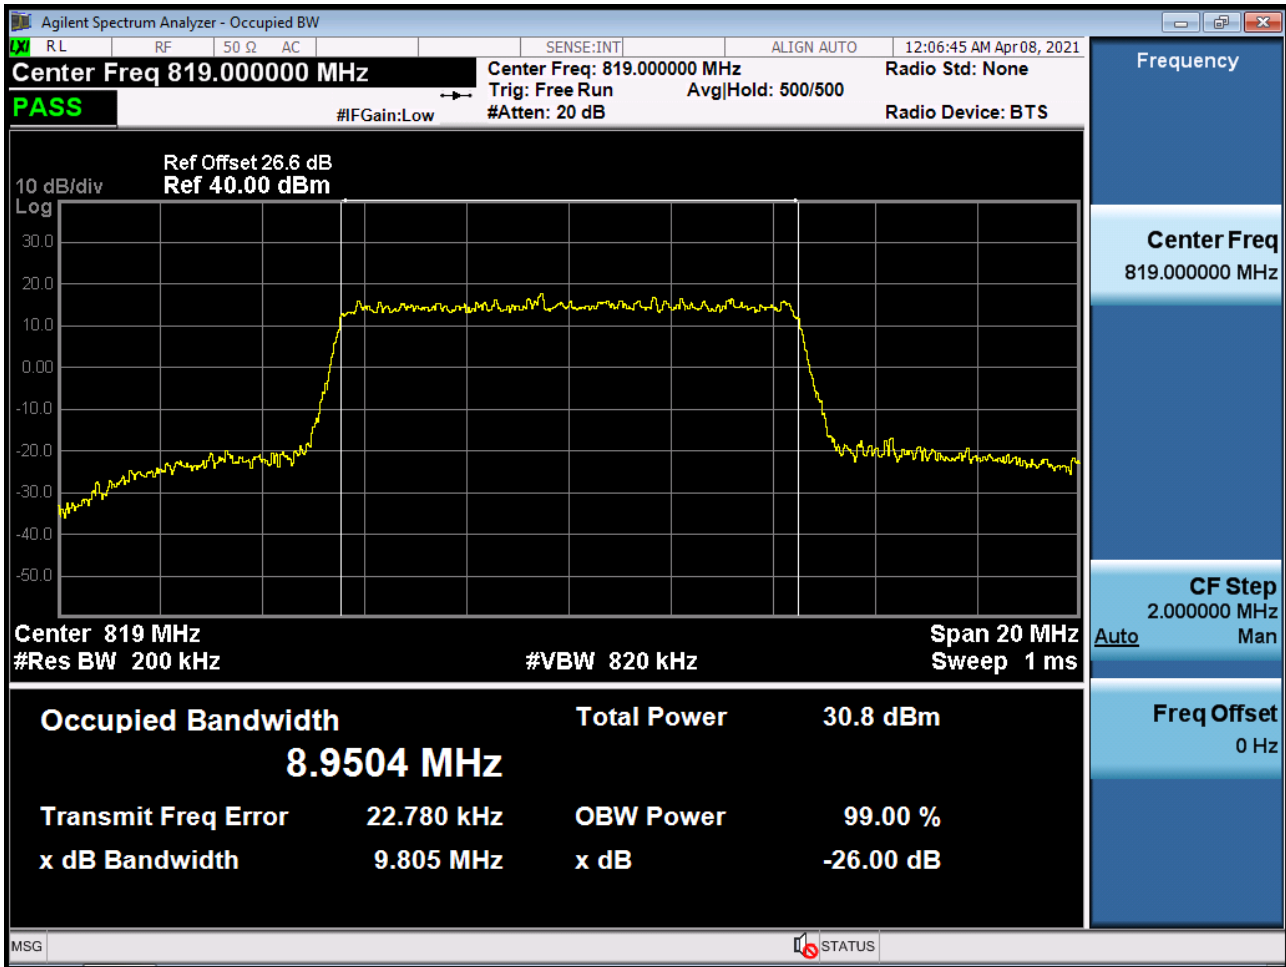


BAND 26. Occupied Bandwidth Plot (10M BW Ch.26740 16QAM RB 50_0)

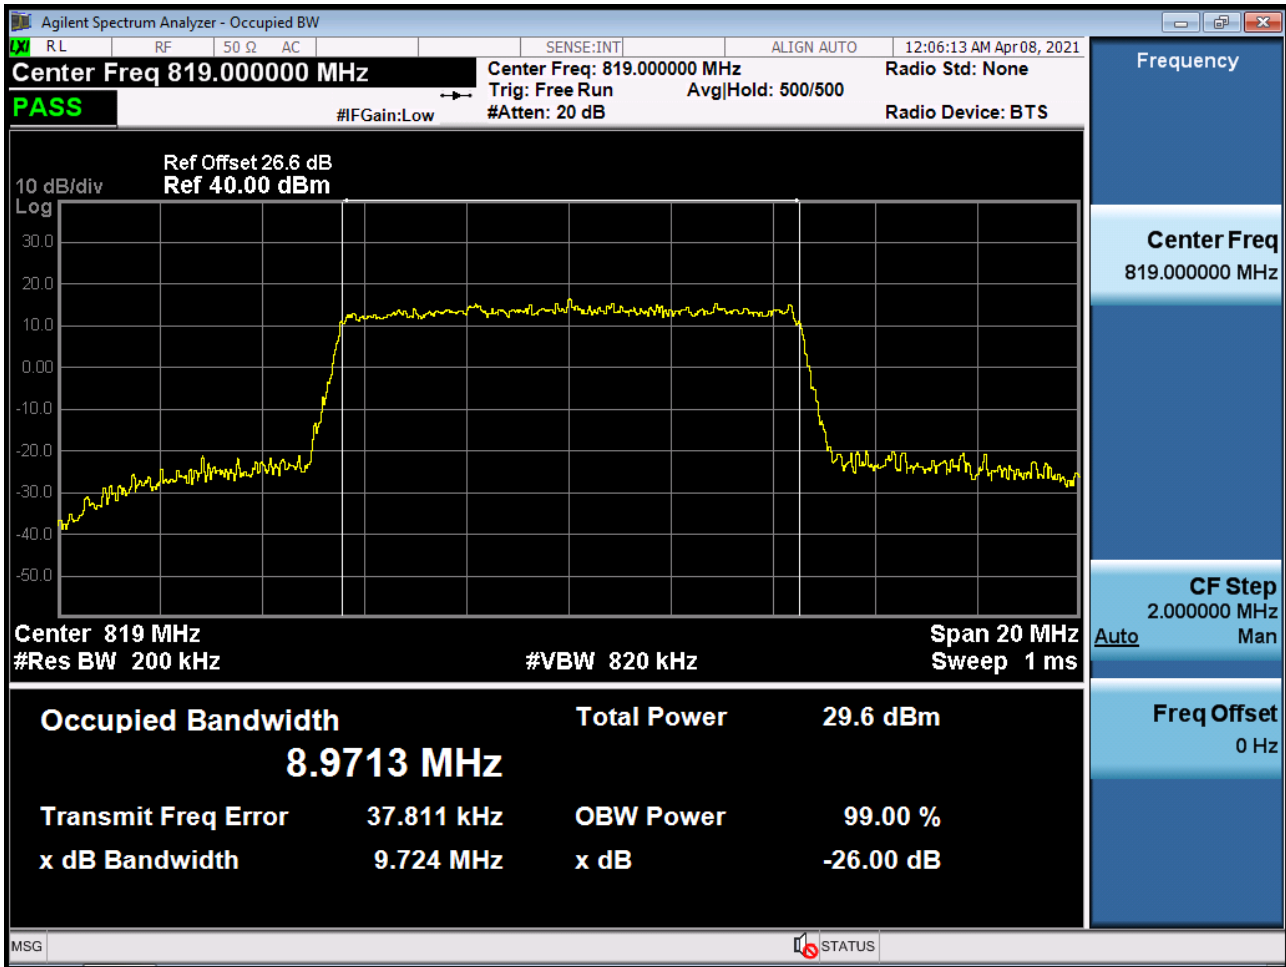


BAND 26. Occupied Bandwidth Plot (10M BW Ch.26740 64QAM RB 50_0)

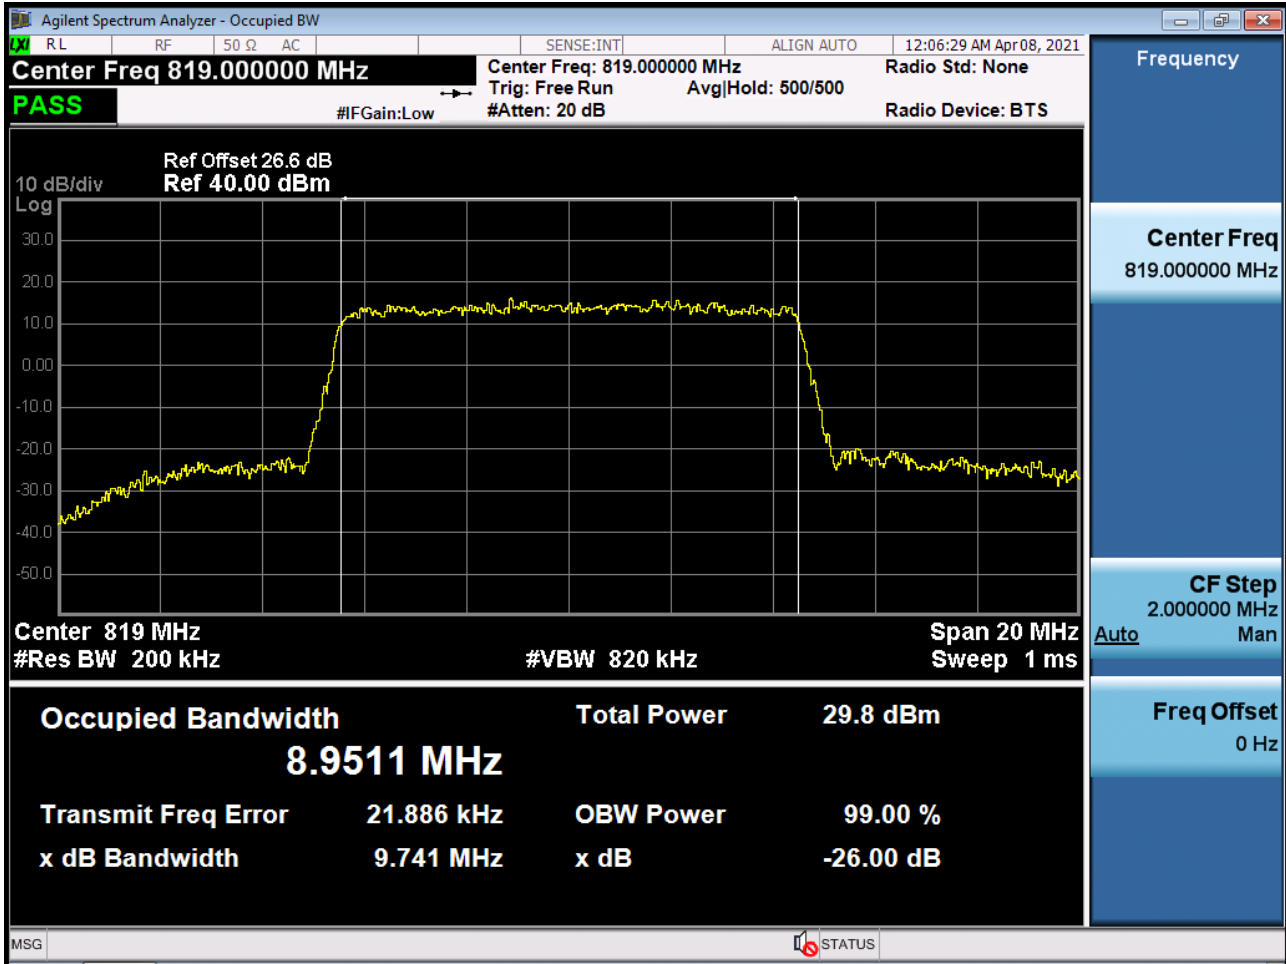


BAND 26. Occupied Bandwidth Plot (10M BW Ch.26740 256QAM RB 50_0)

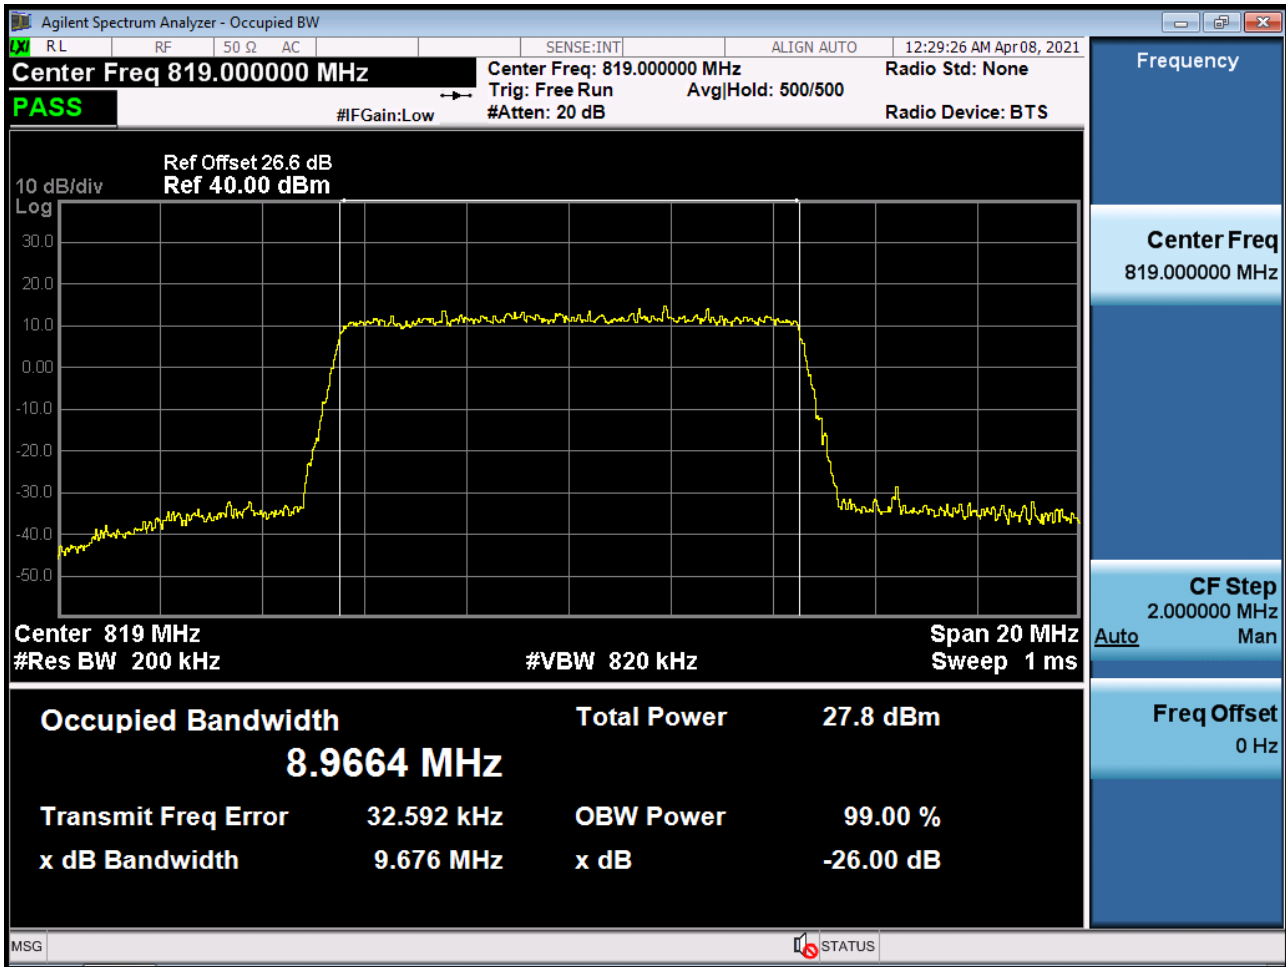


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26765 QPSK RB 75_0)

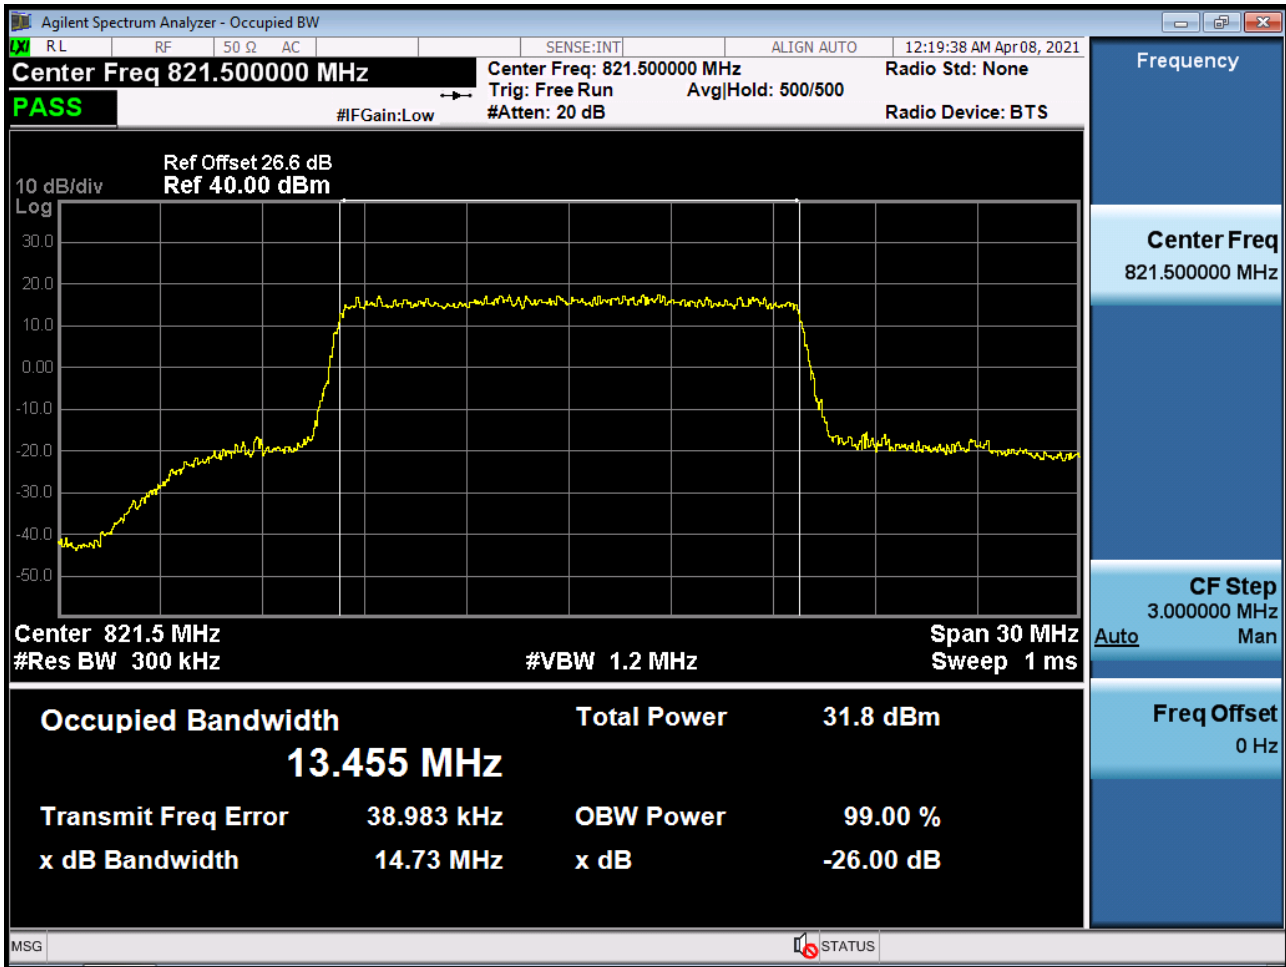


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26765 16QAM RB 75_0)

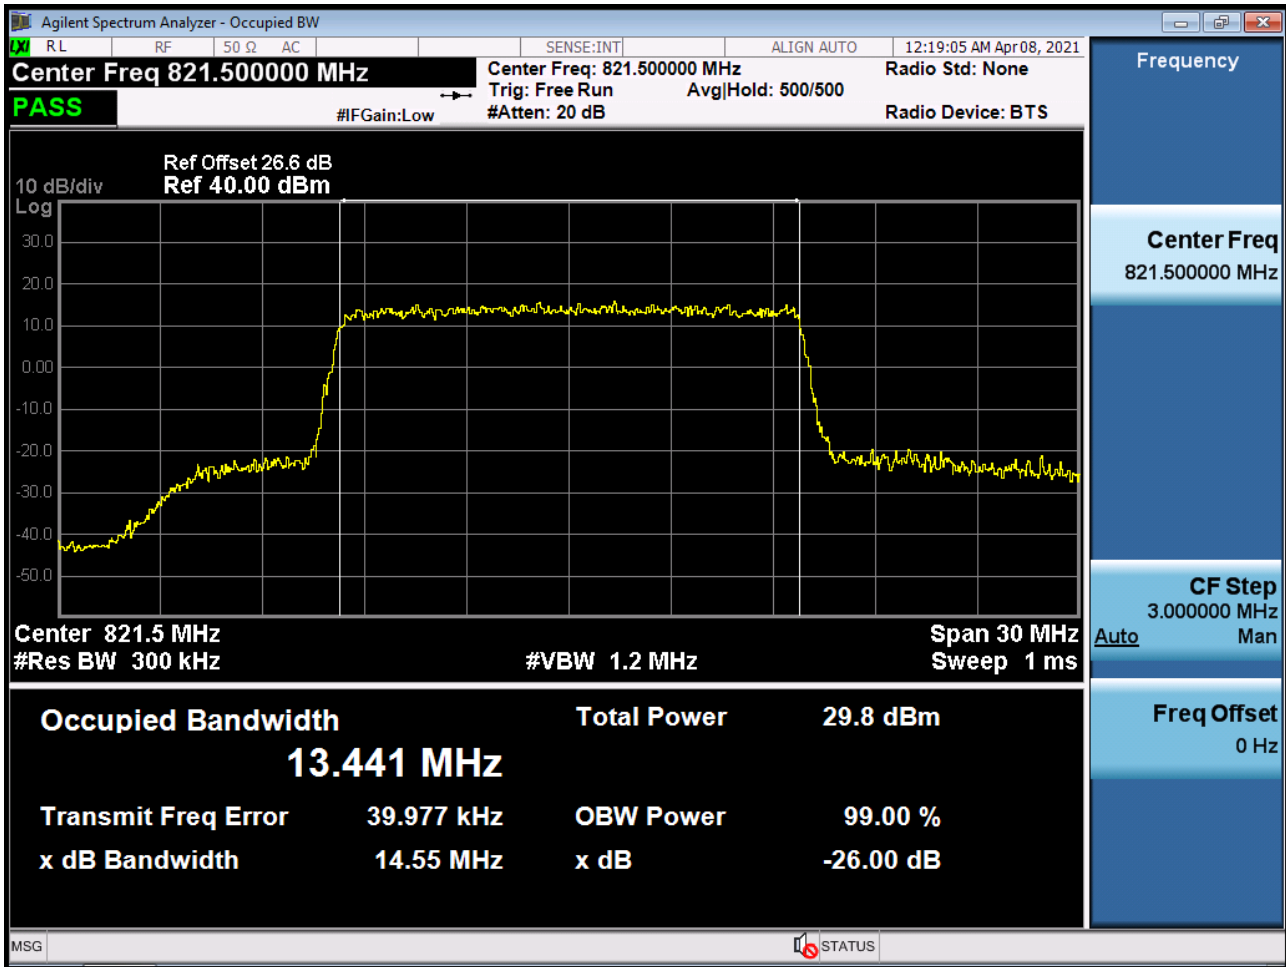


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26765 64QAM RB 75_0)

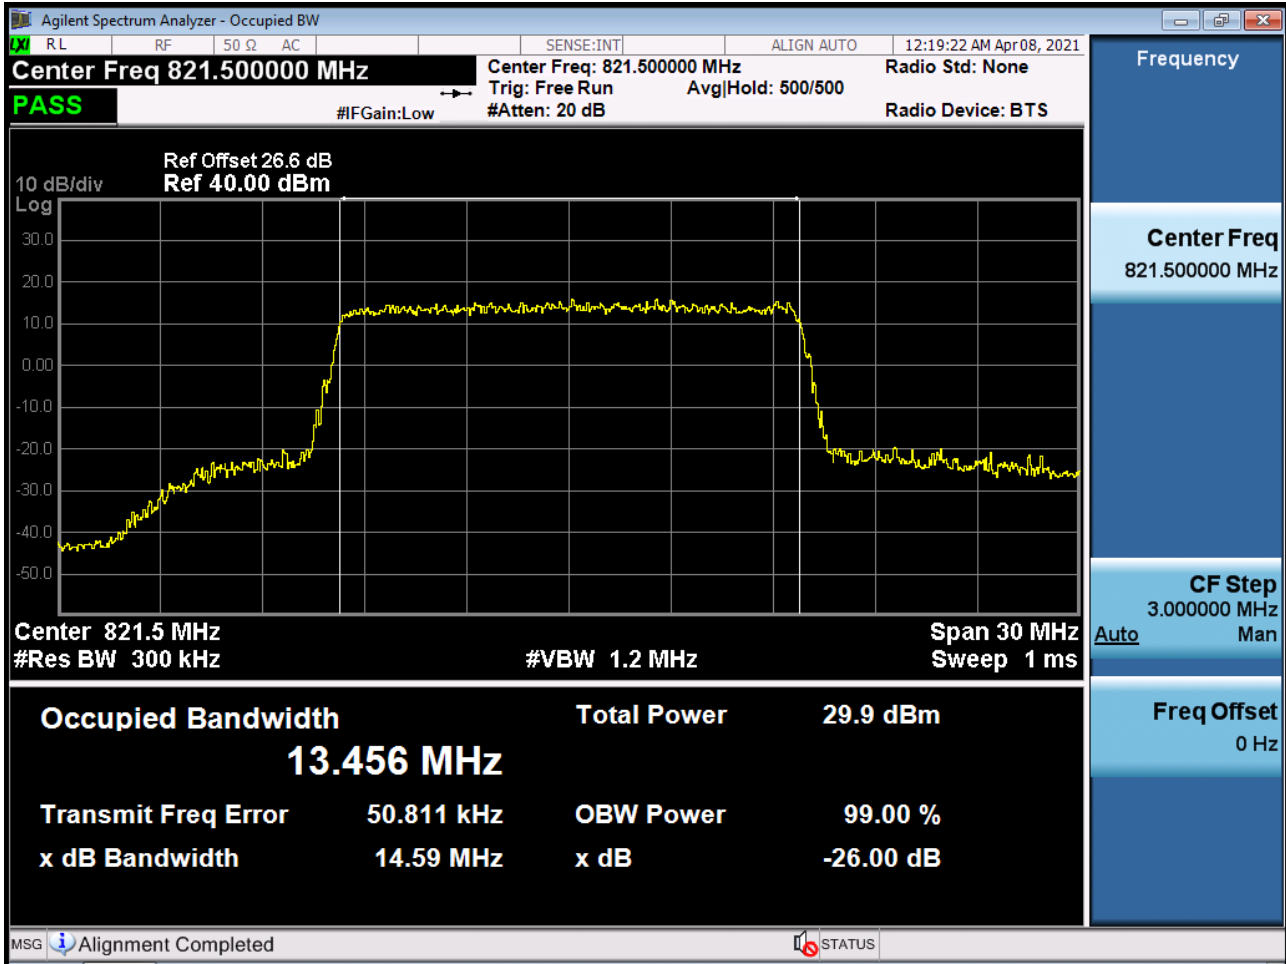


BAND 26. Occupied Bandwidth Plot (15M BW Ch.26765 256QAM RB 75_0)

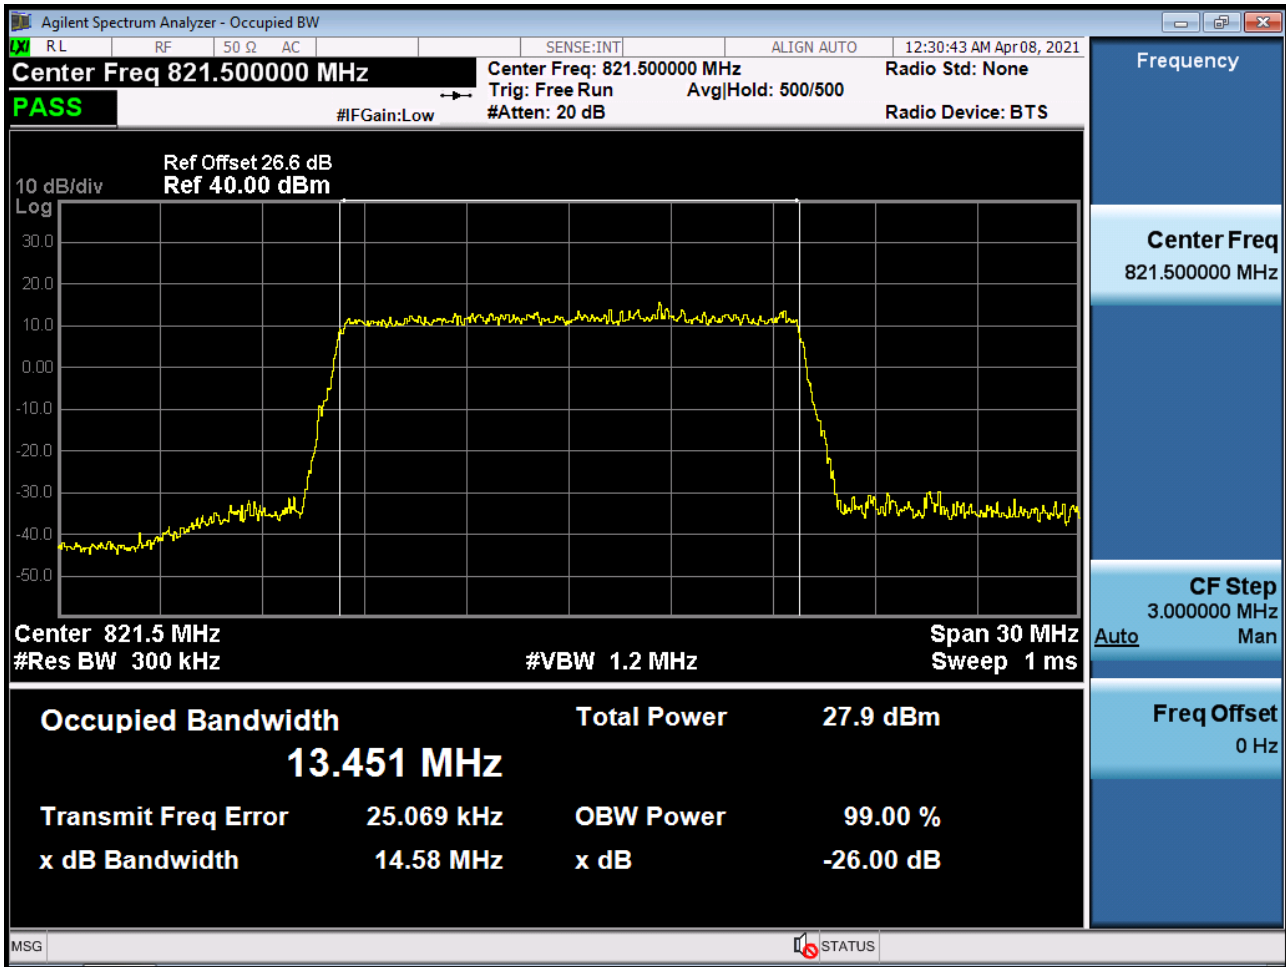


BAND 26. Lower Channel Edge Plot (1.4M BW Ch.26697 QPSK RB 1, Offset 0)

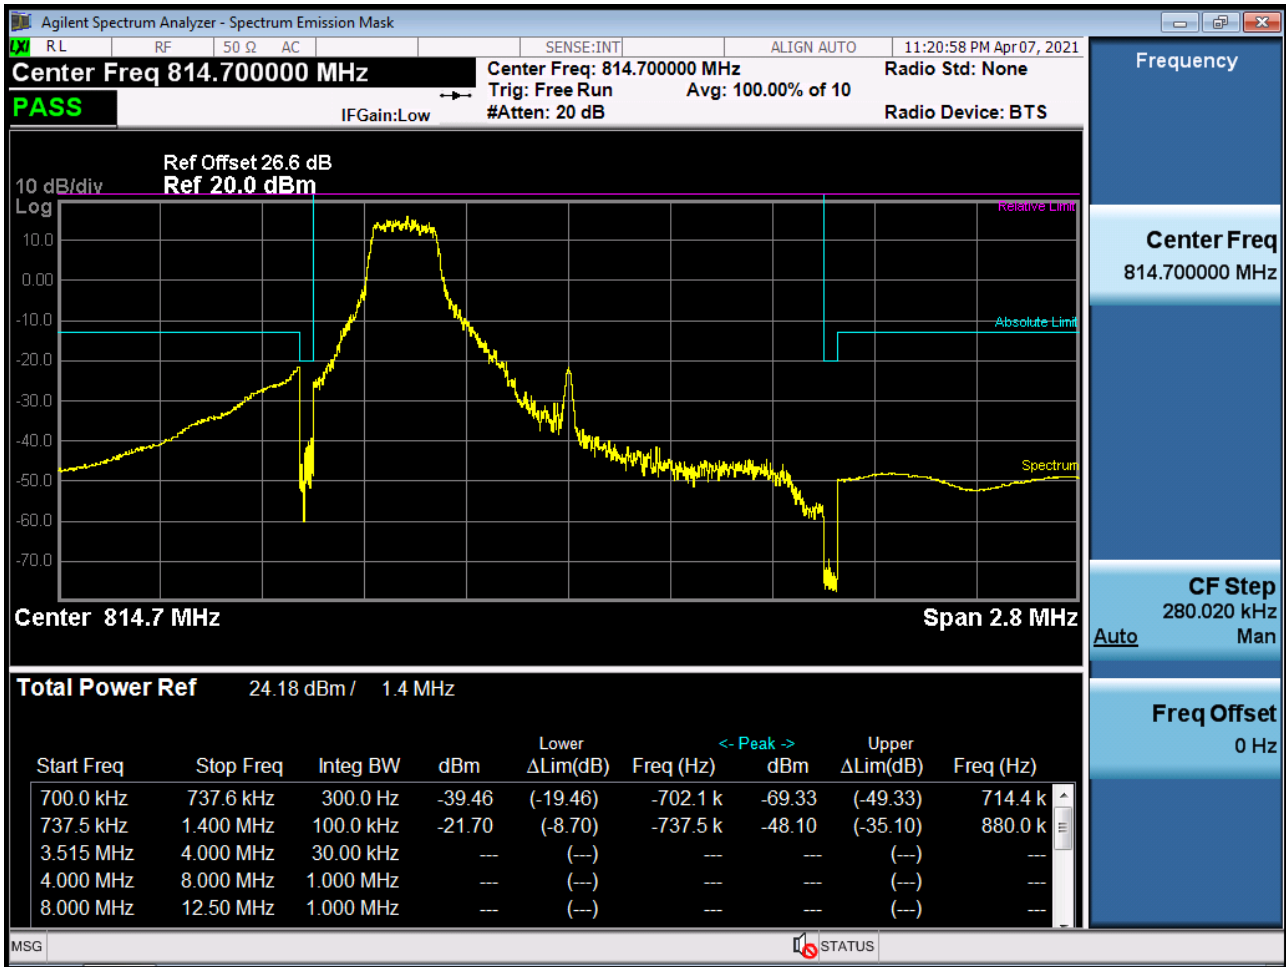


BAND 26. Lower Channel Edge Plot (1.4M BW Ch.26697 QPSK_RB6_Offset 0)

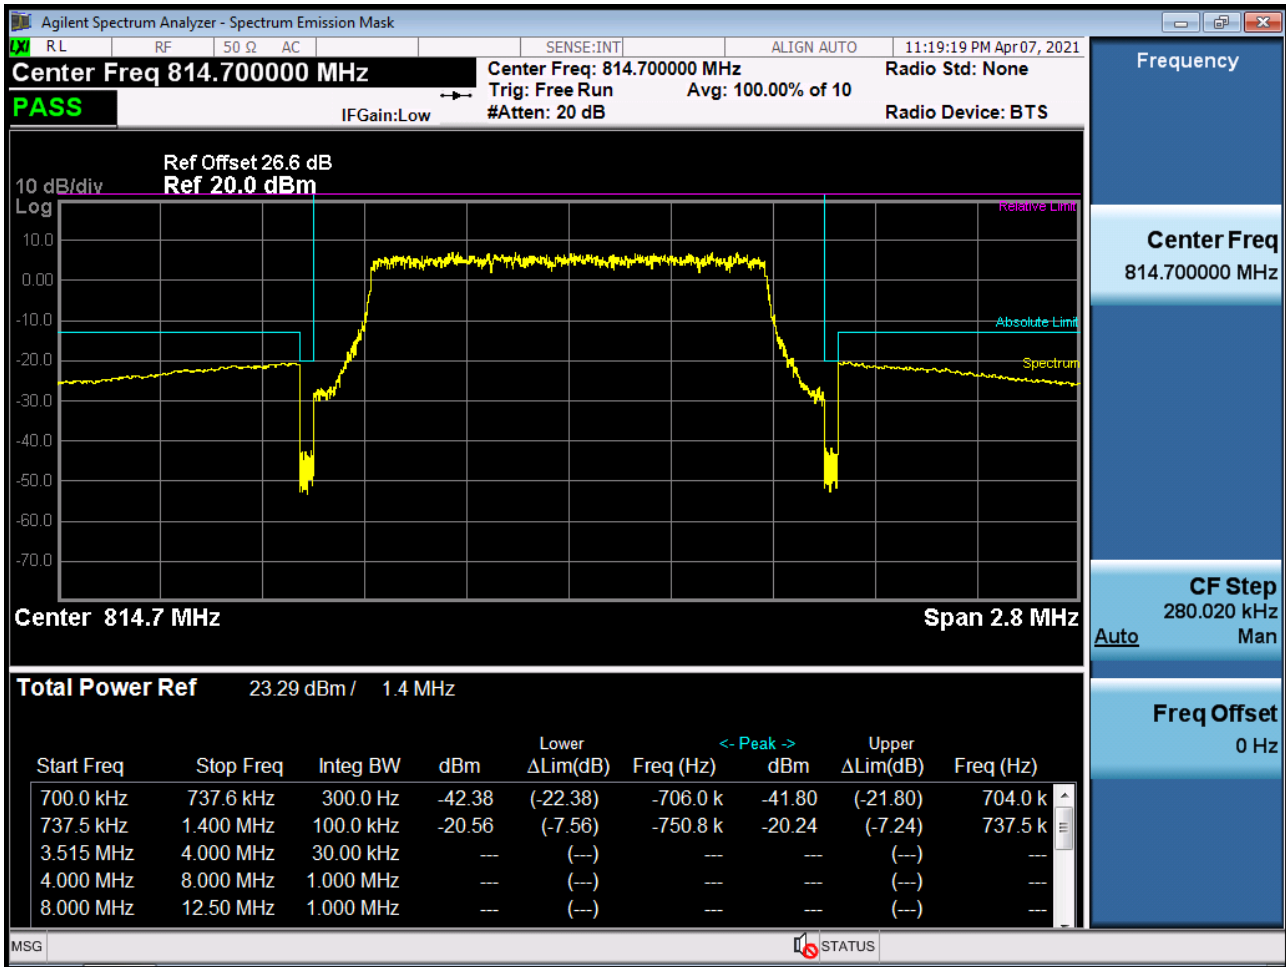


BAND 26. Lower Channel Edge Plot (3M BW Ch.26705 QPSK RB 1, Offset 0)

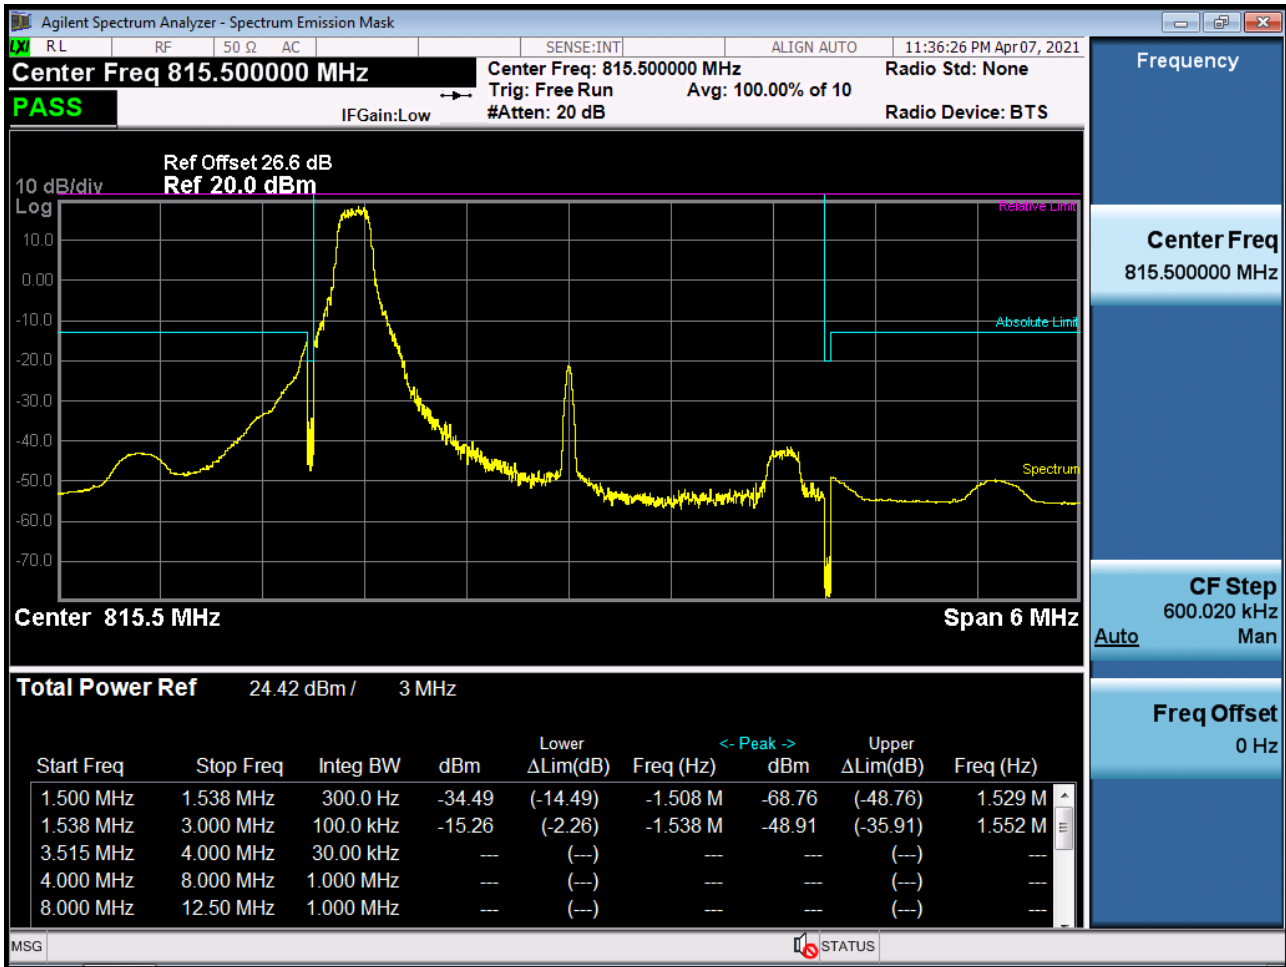


BAND 26. Lower Channel Edge Plot (3M BW Ch.26705 QPSK_RB15_Offset 0)

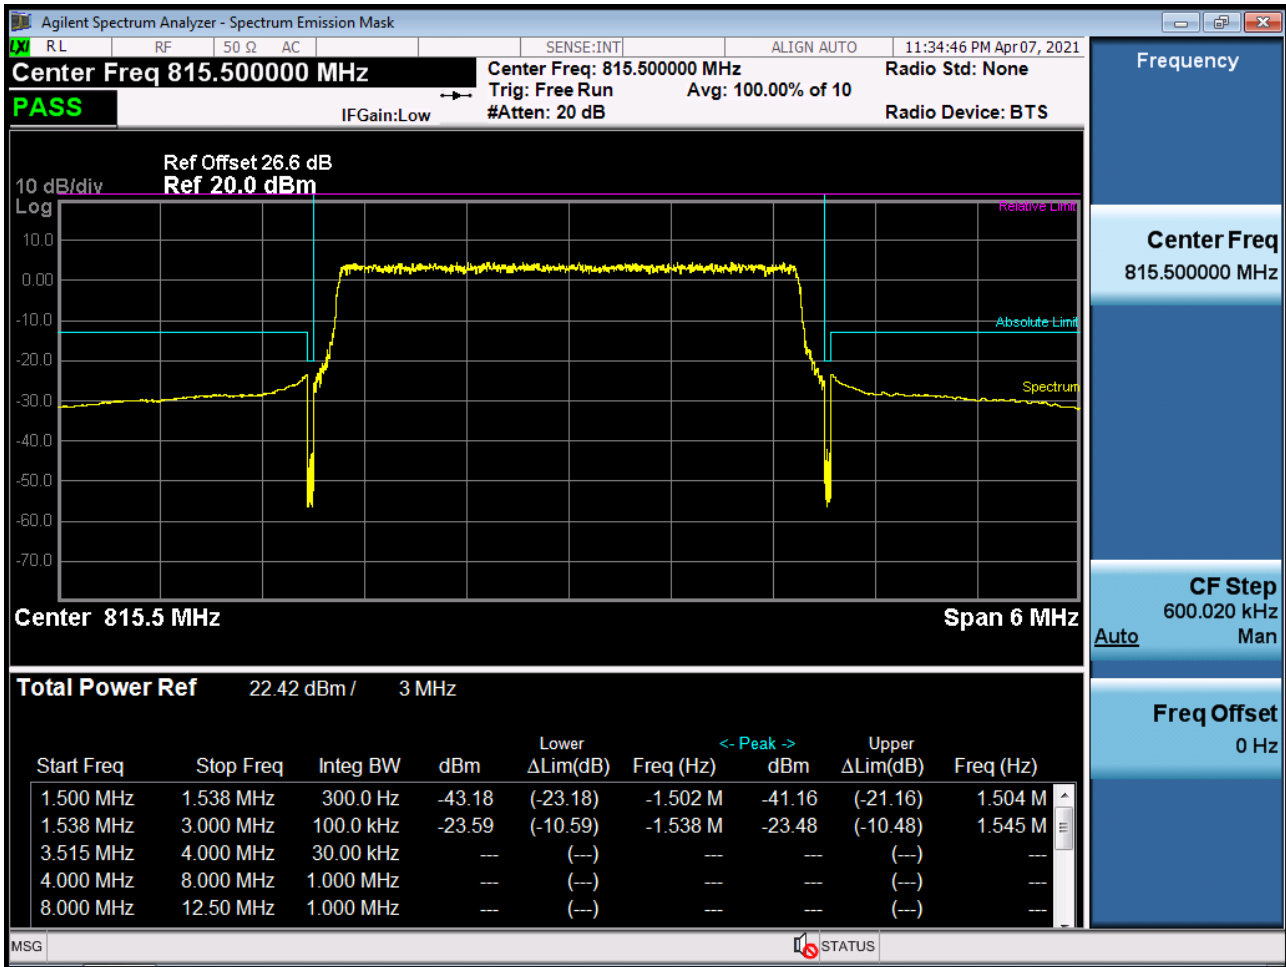


BAND 26. Lower Channel Edge Plot (5M BW Ch.26715 QPSK RB 1, Offset 0)

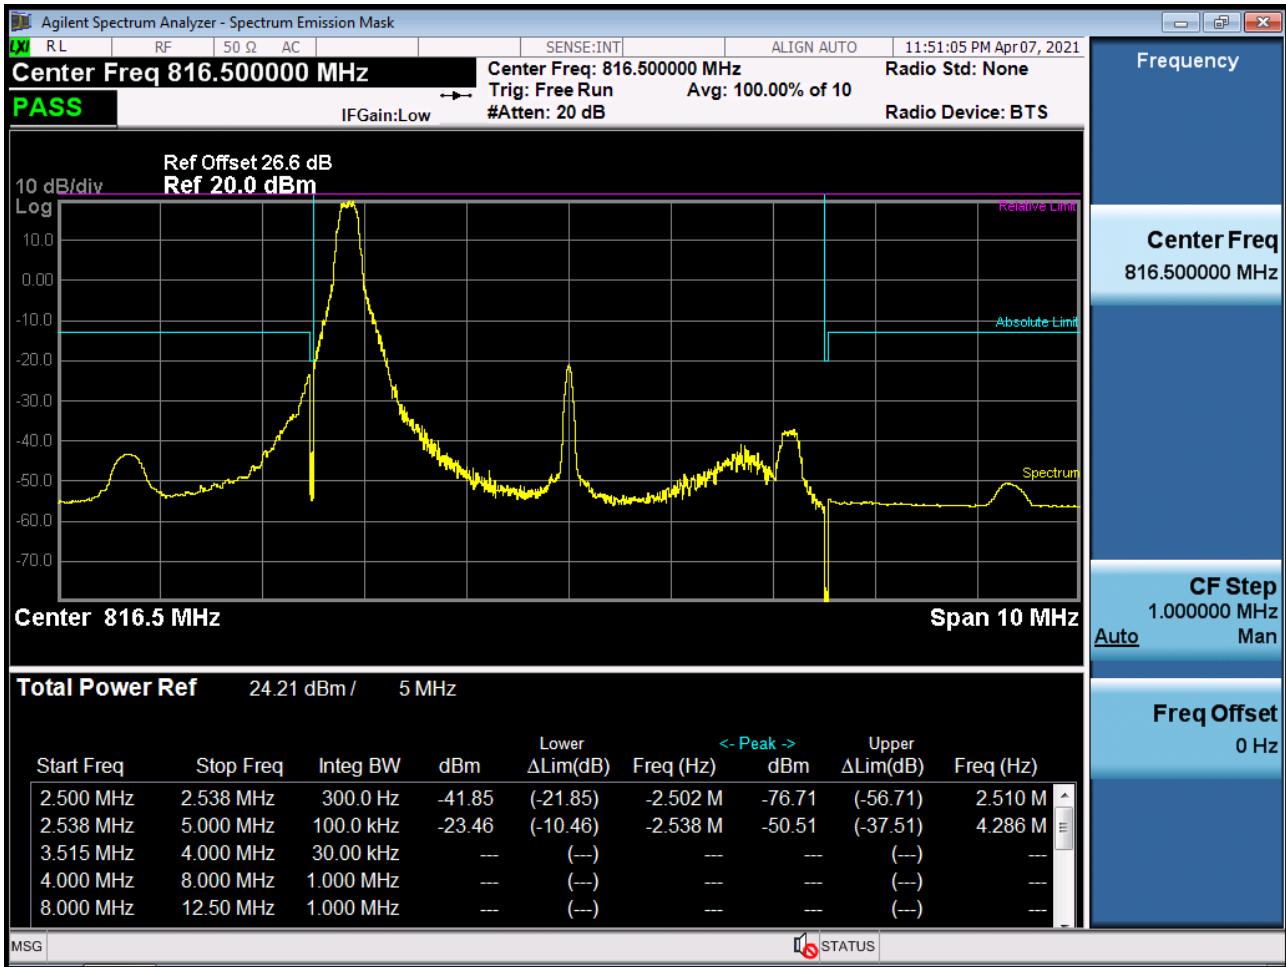


BAND 26. Lower Channel Edge Plot (5M BW Ch.26715 QPSK_RB25_Offset 0)

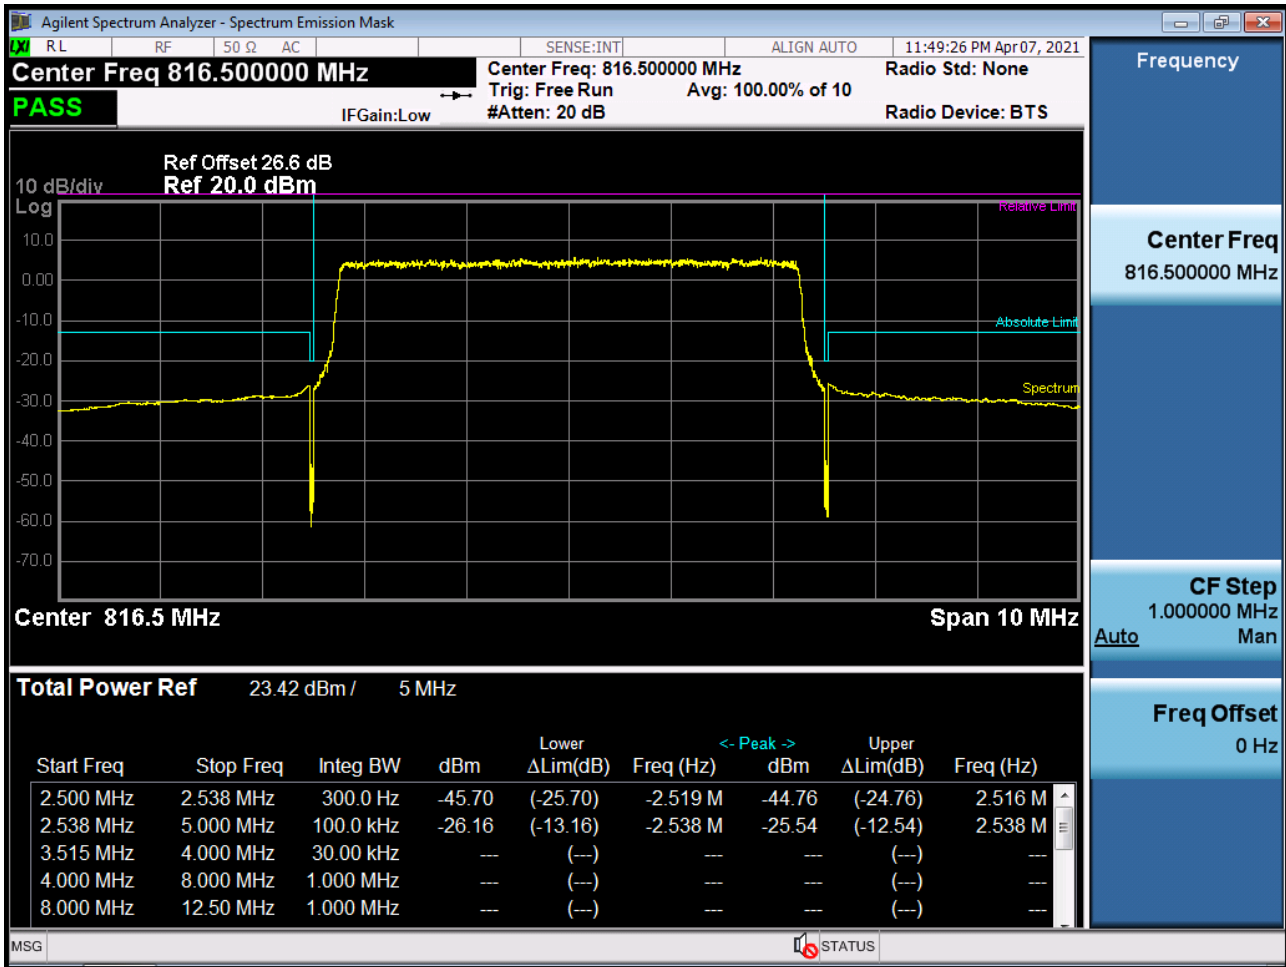


BAND 26. Low Channel Edge Plot (10M BW Ch.26740 QPSK RB 1, Offset 0)

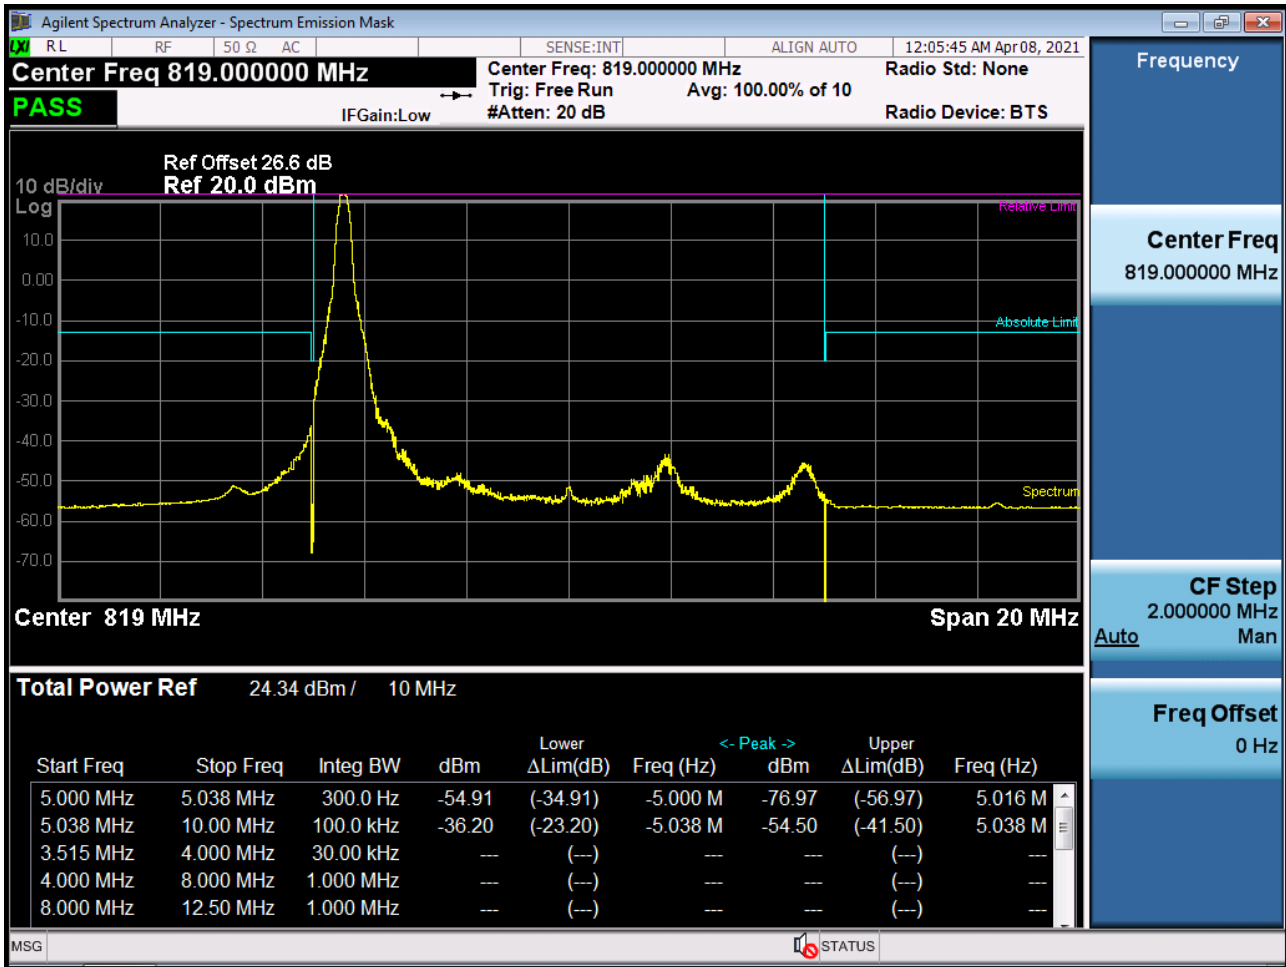


BAND 26. Low Channel Edge Plot (10M BW Ch.26740 QPSK_RB50_Offset 0)

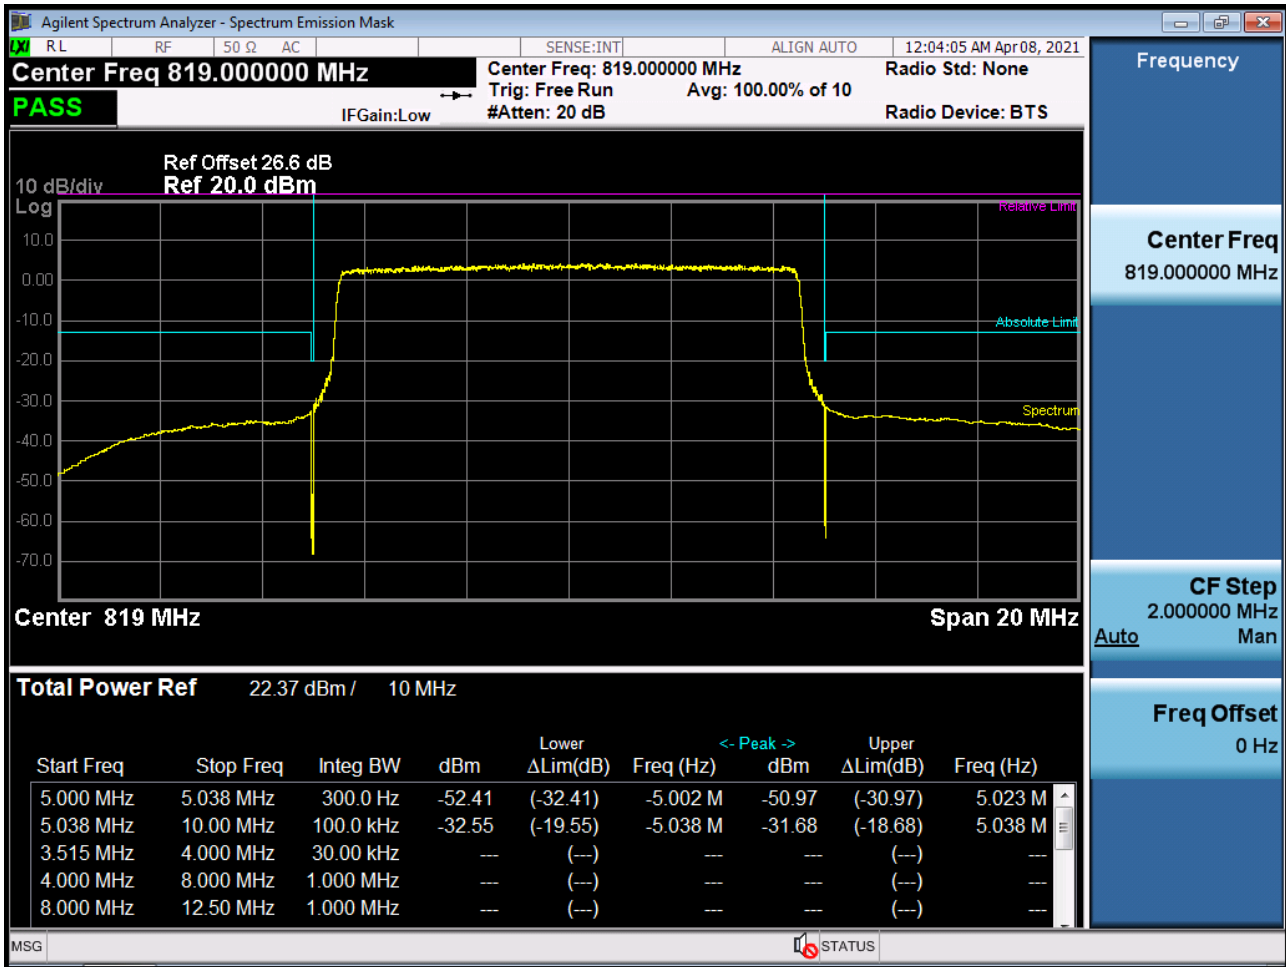


BAND 26. Mid Channel Edge Plot (10M BW Ch. 26740 QPSK_RB1_Offset 49)

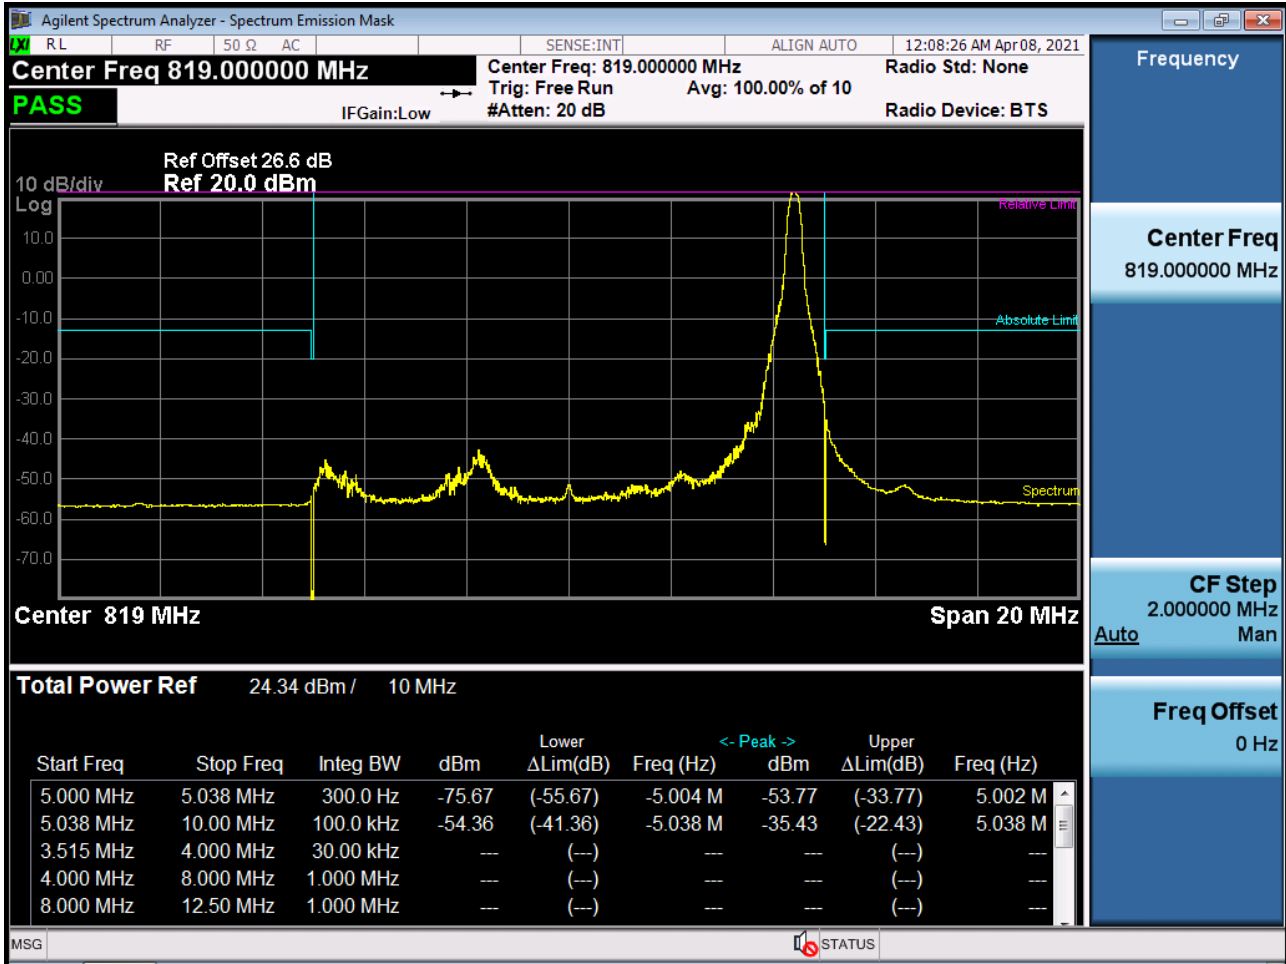


BAND 26. Low Channel Edge Plot (15M BW Ch.26765 QPSK RB 1, Offset 0)

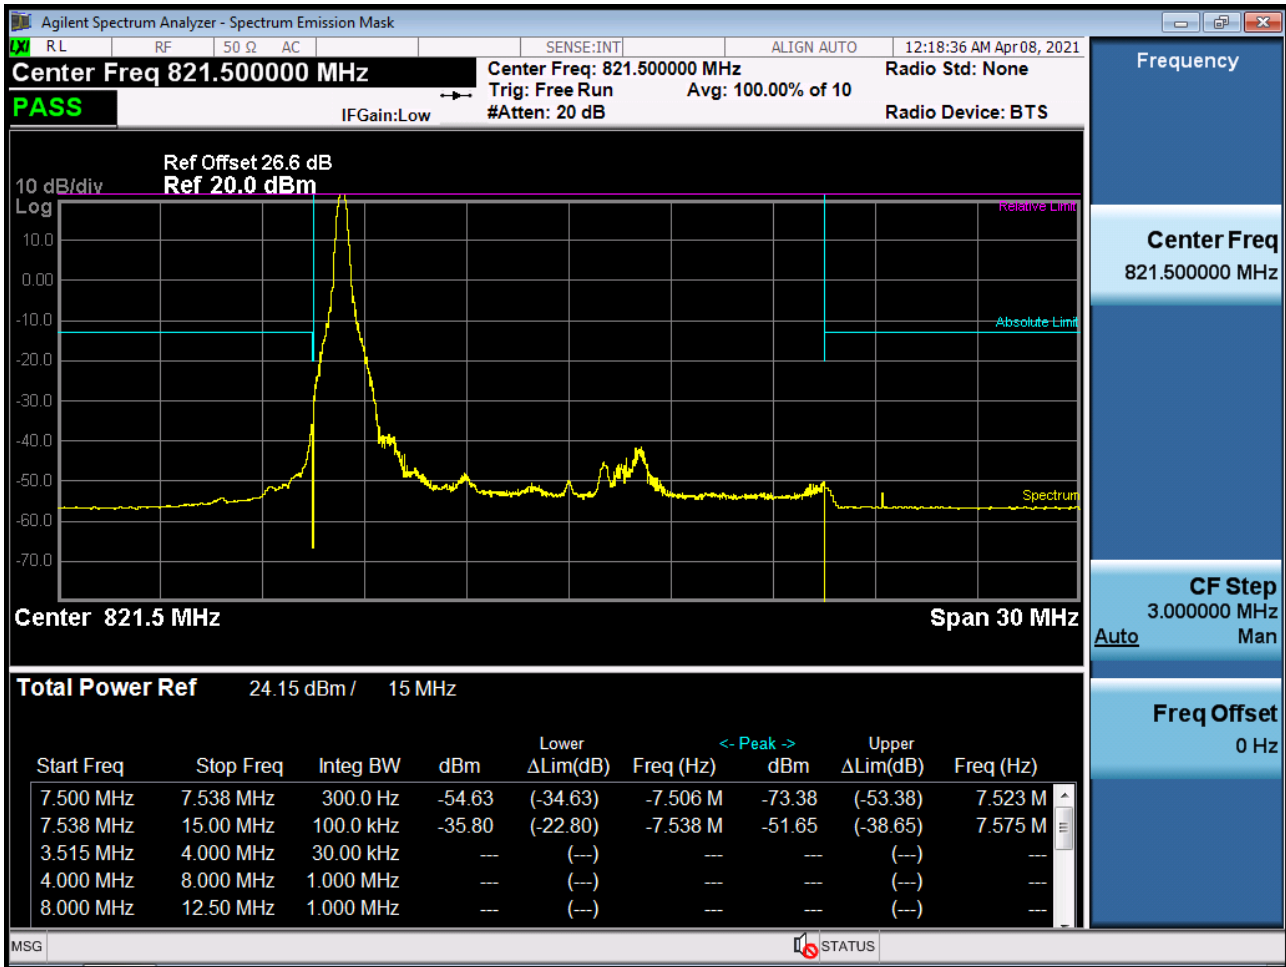


BAND 26. Low Channel Edge Plot (15M BW Ch.26765 QPSK RB 75, Offset0)

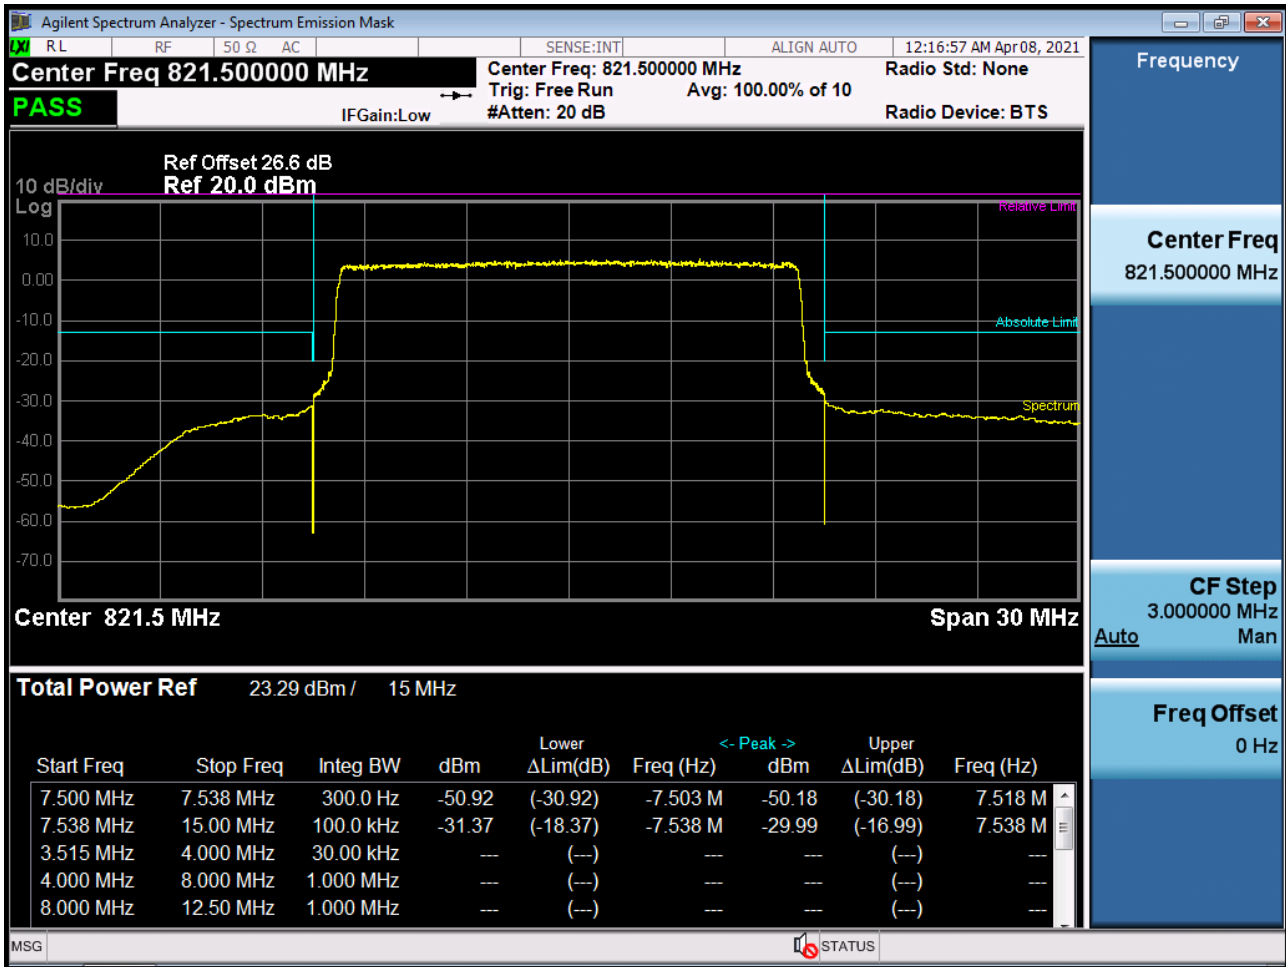

BAND 26. Mid Channel Edge Plot (15M BW Ch.26765 QPSK_RB1_Offset 74)

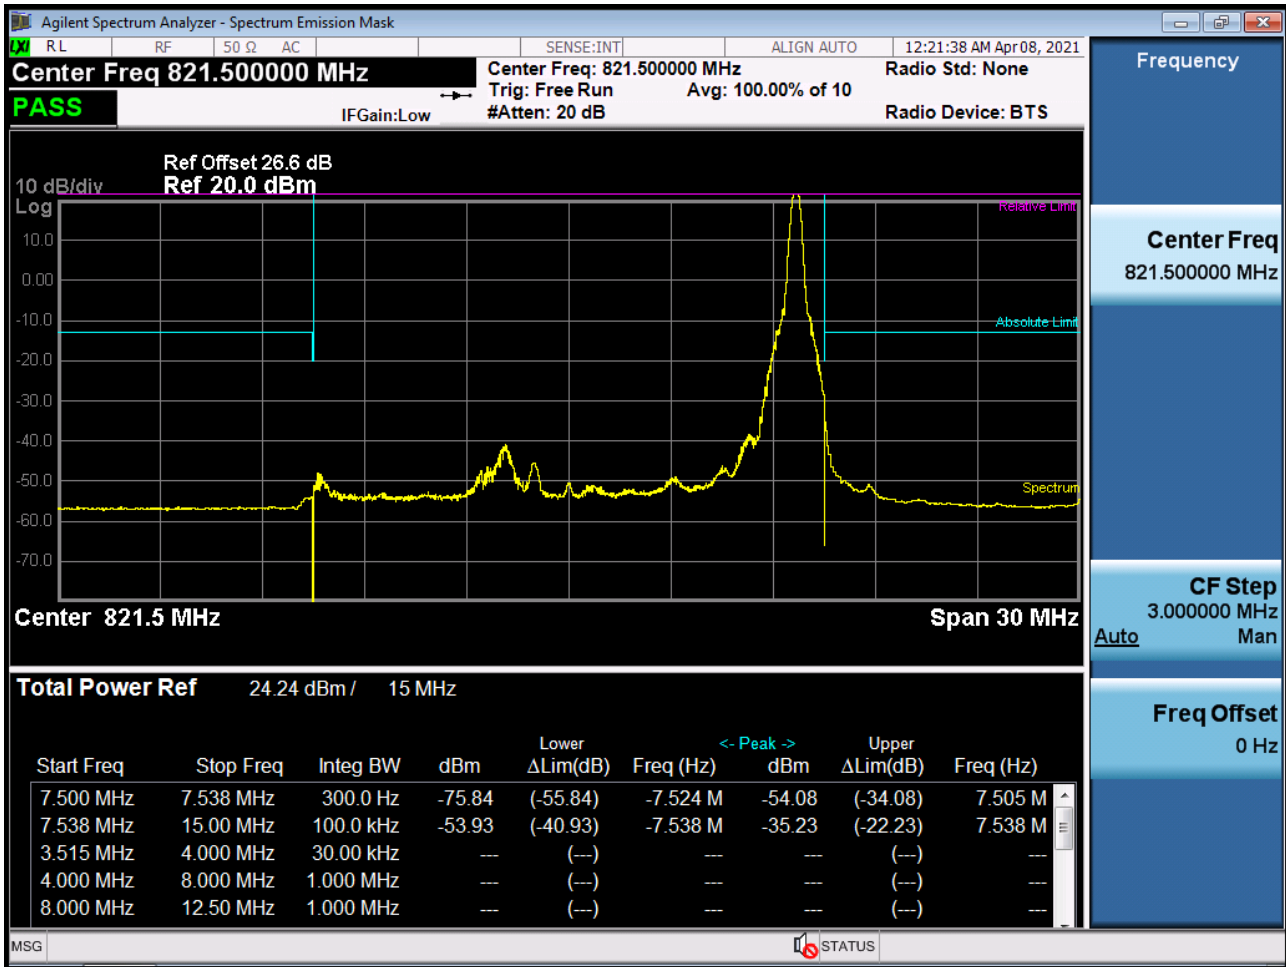


BAND 26. Mid Band Edge Plot (15M BW Ch.26765 QPSK RB 1, Offset74)

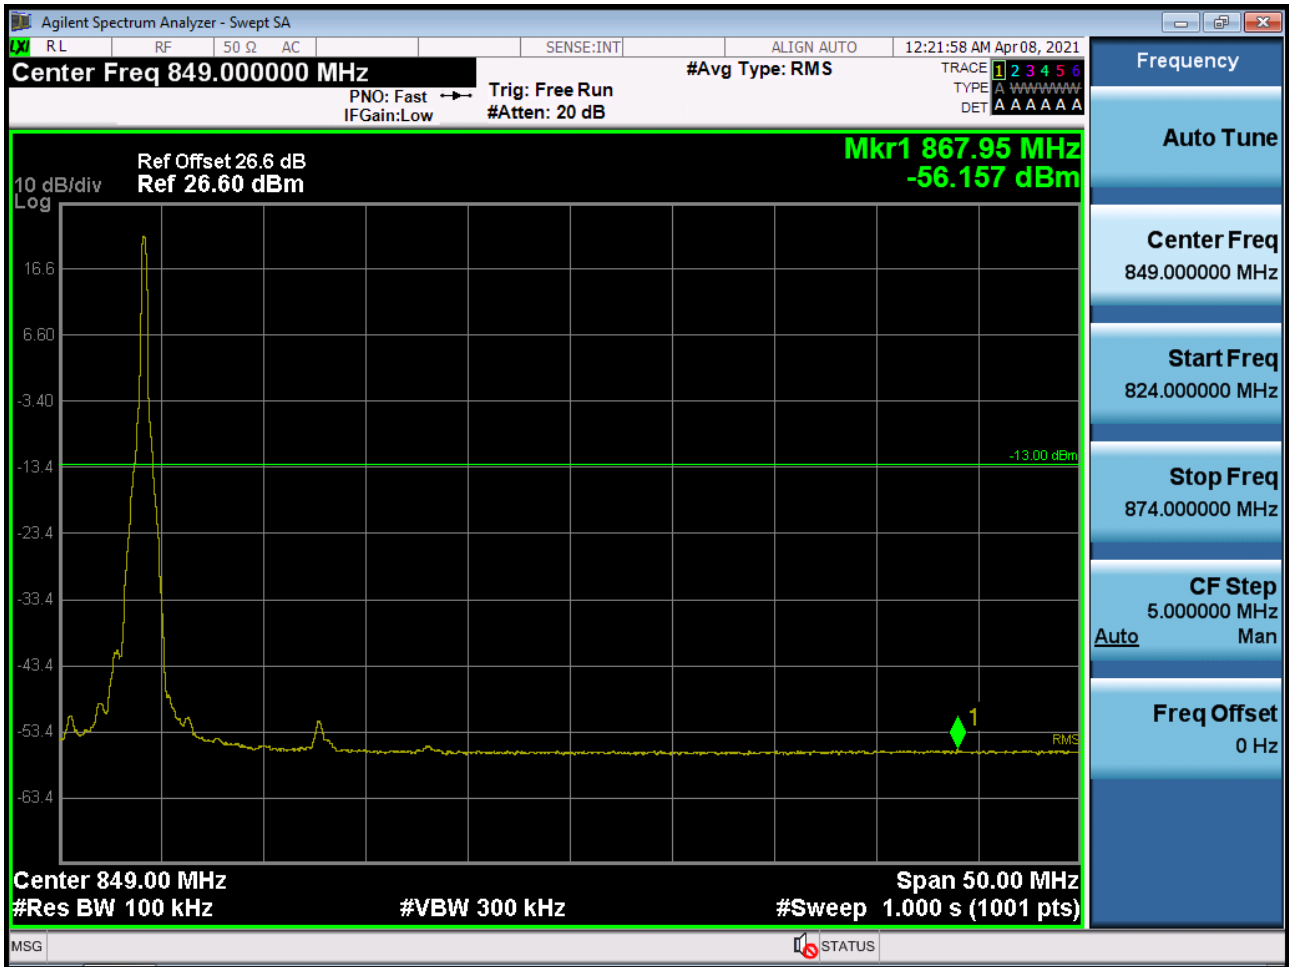


BAND 26. Mid Band Edge Plot (15M BW Ch.26765 QPSK_RB75_Offset 0)




BAND 26. Upper Channel Edge Plot (1.4M BW Ch.26783 QPSK_RB1_Offset 5)

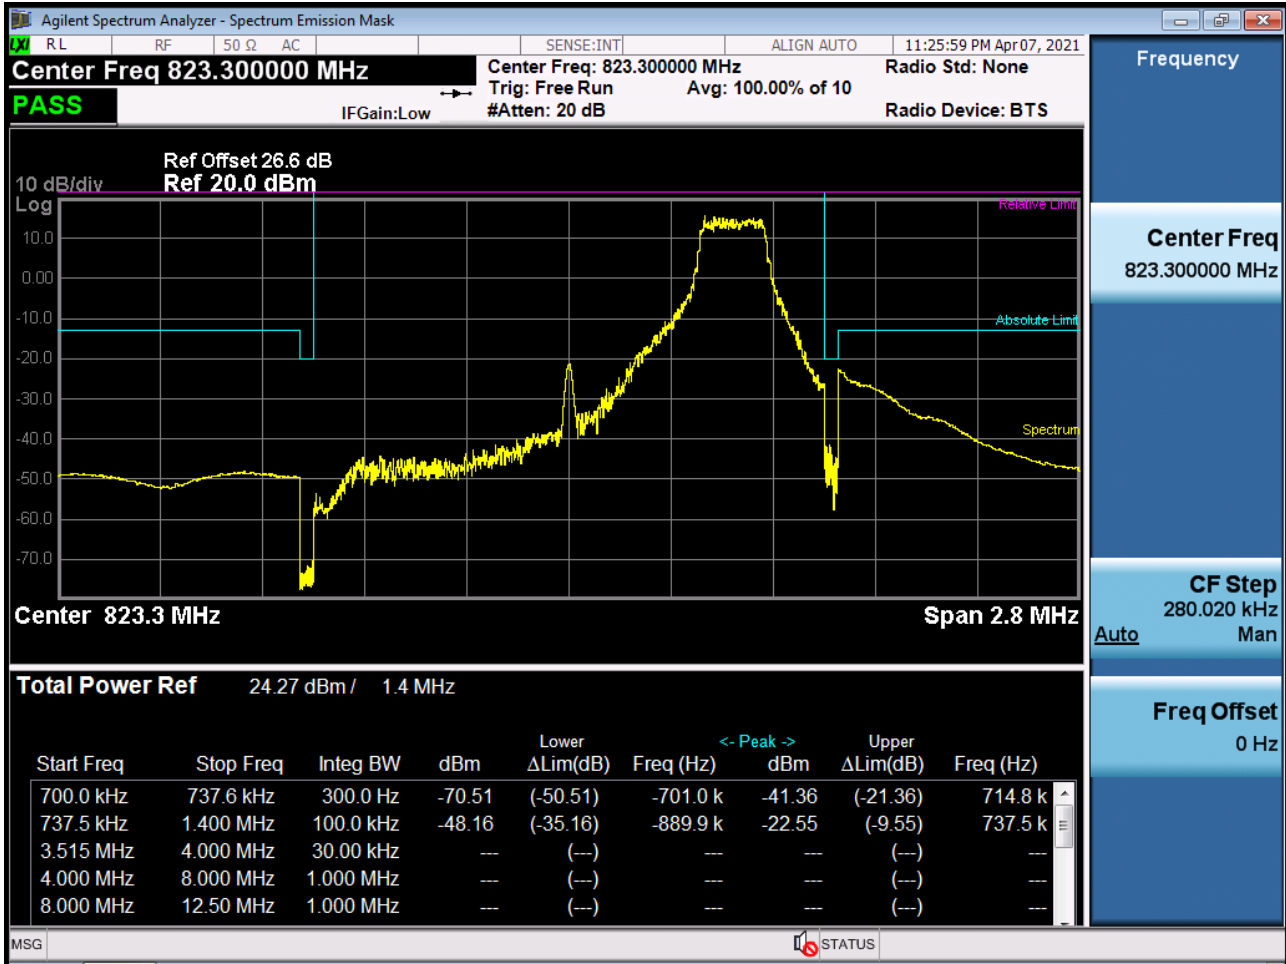


BAND 26. Upper Channel Edge Plot (1.4M BW Ch.26783 QPSK_RB6_Offset 0)

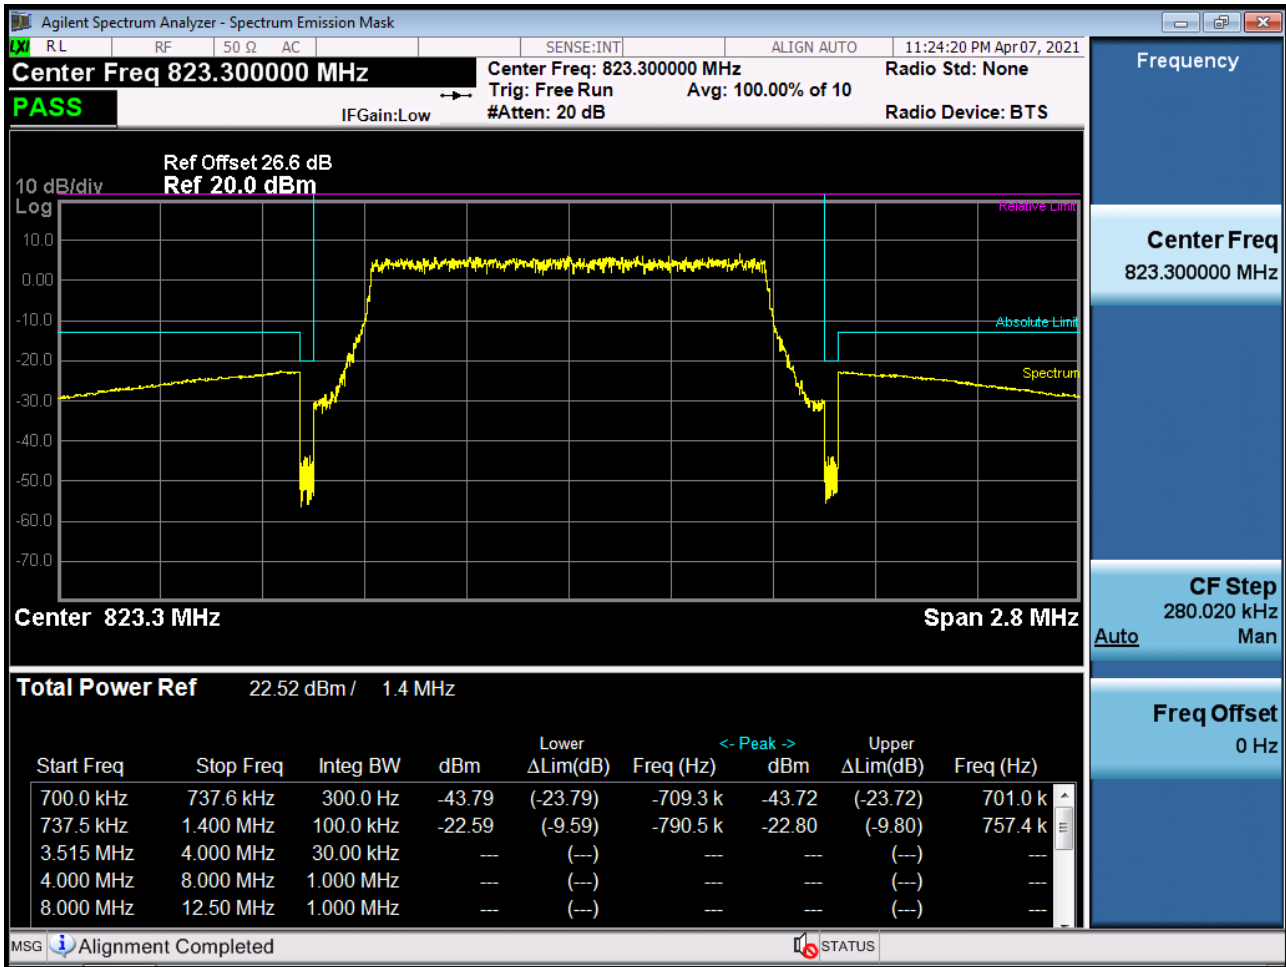


BAND 26. Upper Channel Edge Plot (3M BW Ch.26775 QPSK_RB1_Offset 14)

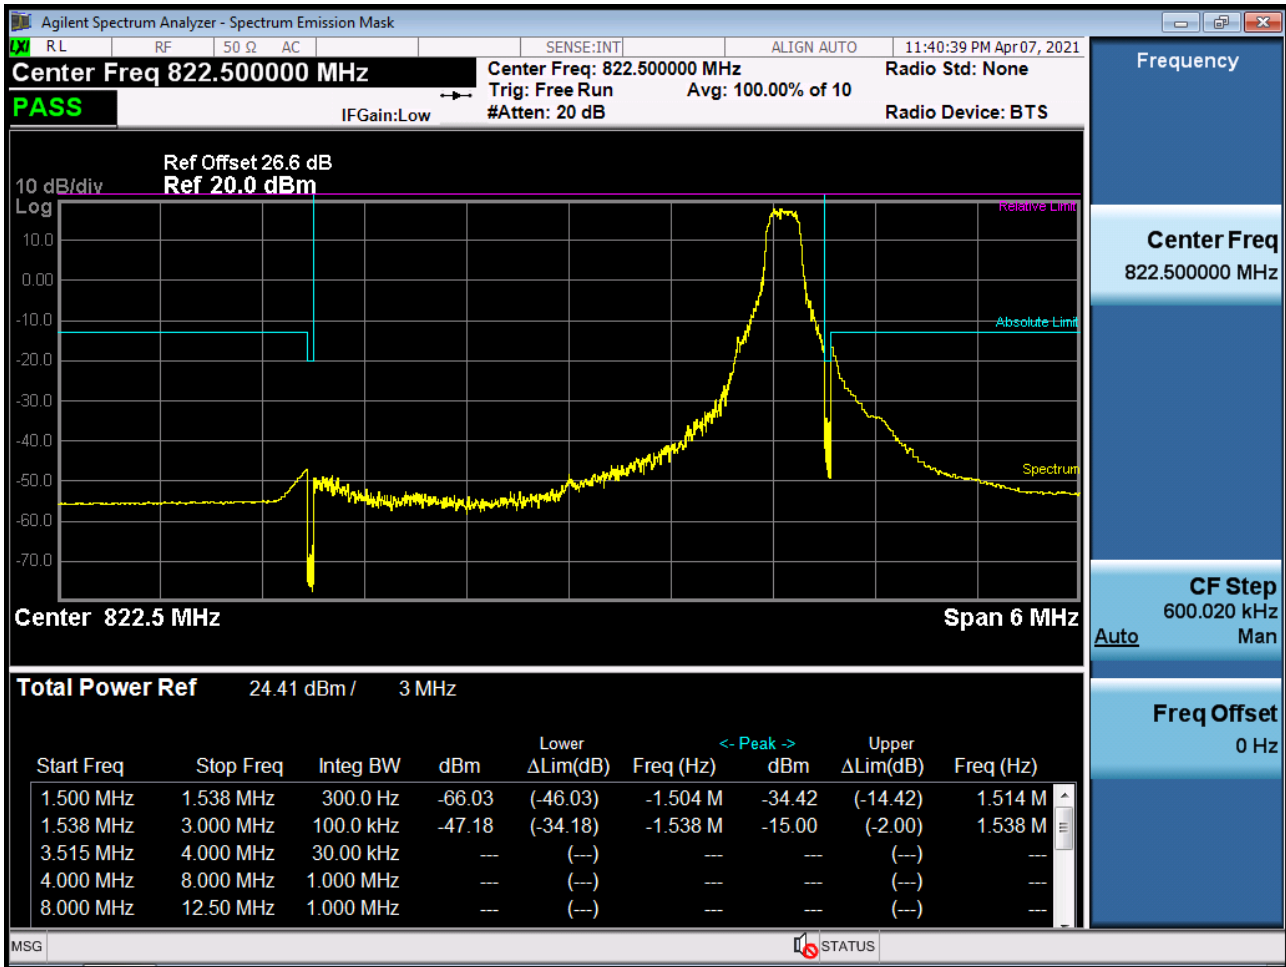


BAND 26. Upper Channel Edge Plot (3M BW Ch.26775 QPSK_RB15_Offset 0)

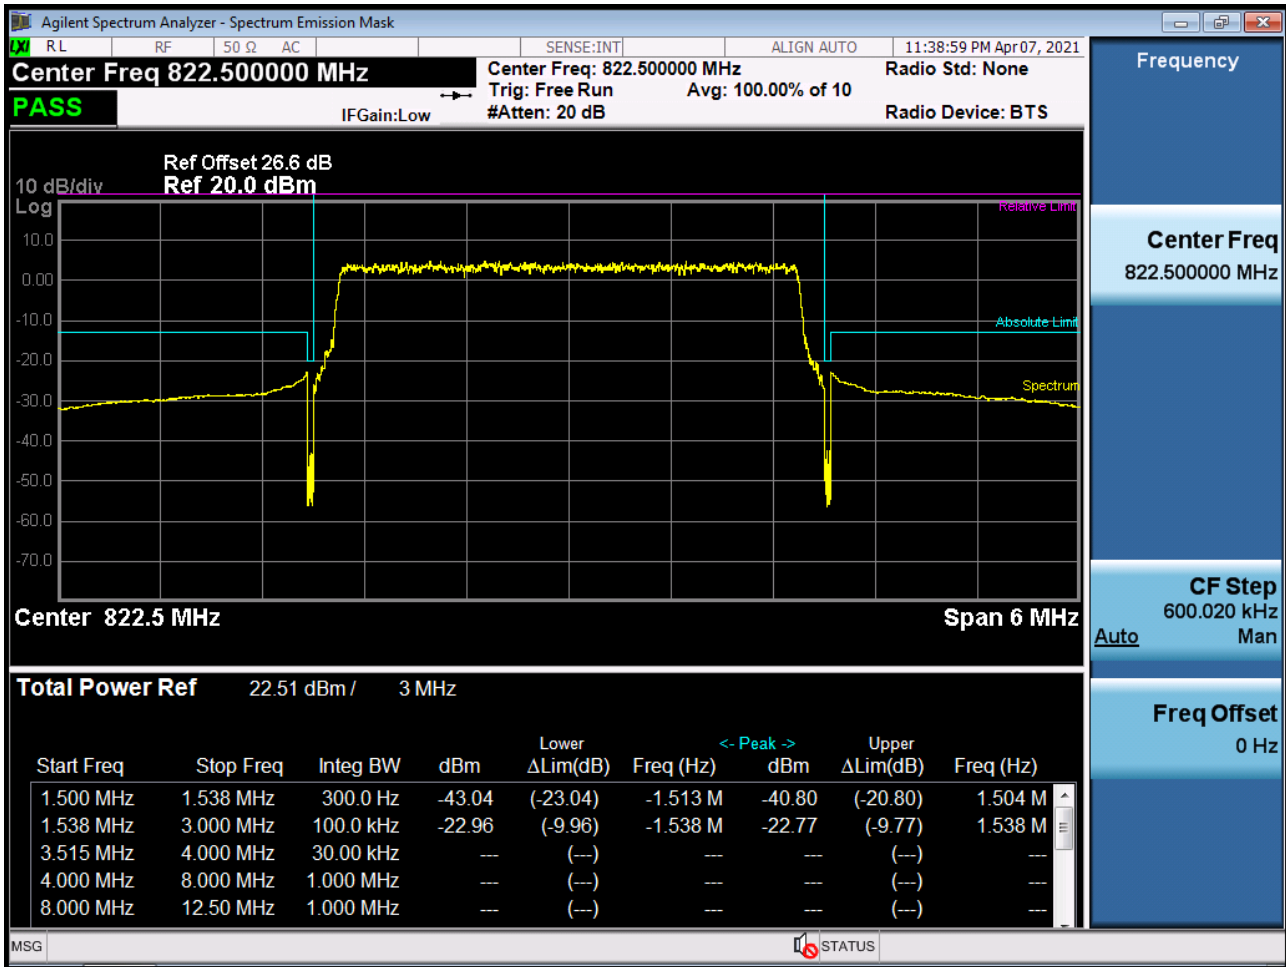


BAND 26. Upper Channel Edge Plot (5M BW Ch.26765 QPSK_RB1_Offset 24)

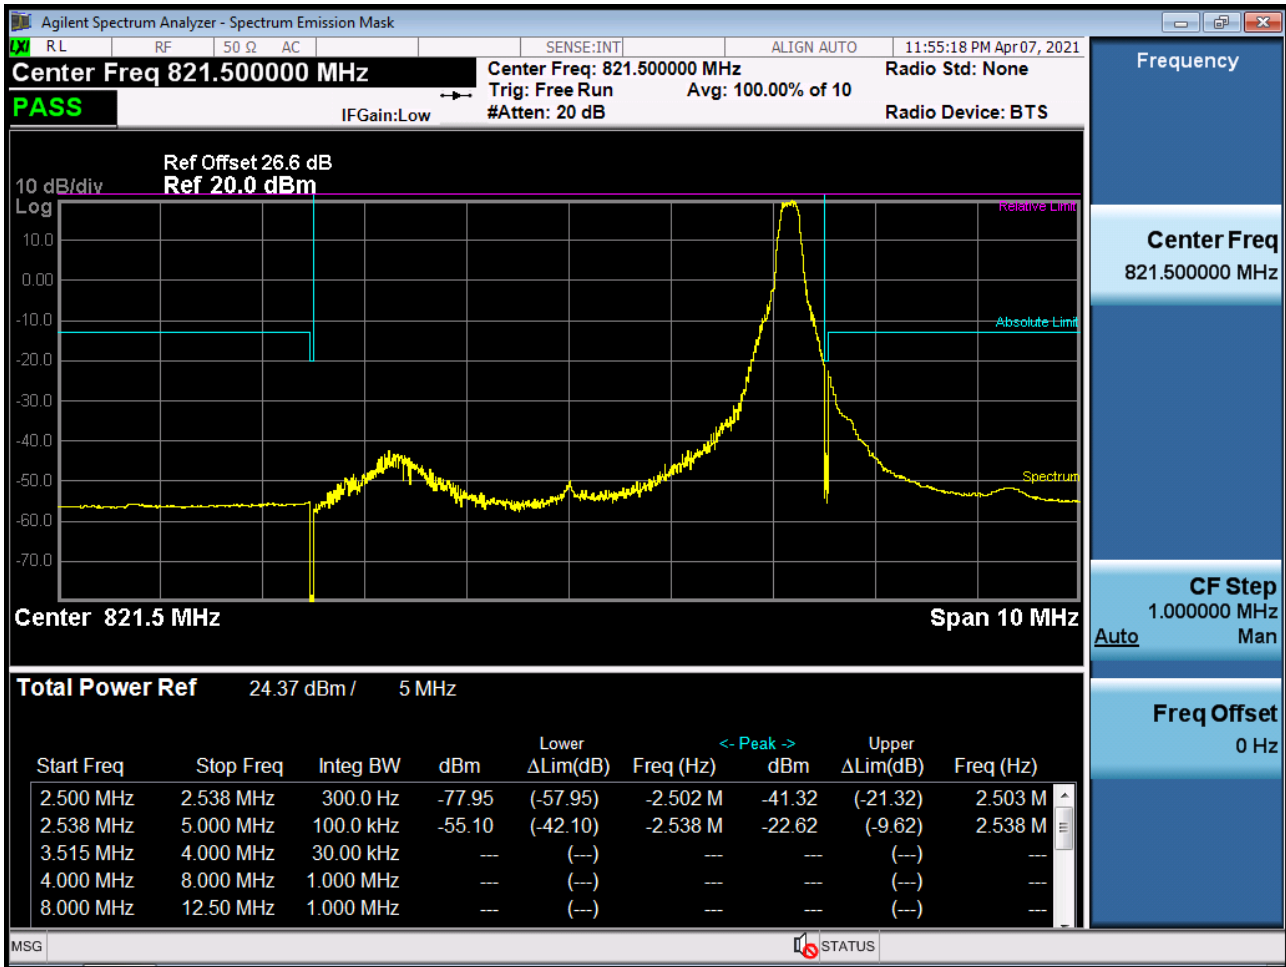


BAND 26. Upper Channel Edge Plot (5M BW Ch.26765 QPSK_RB25_Offset 0)

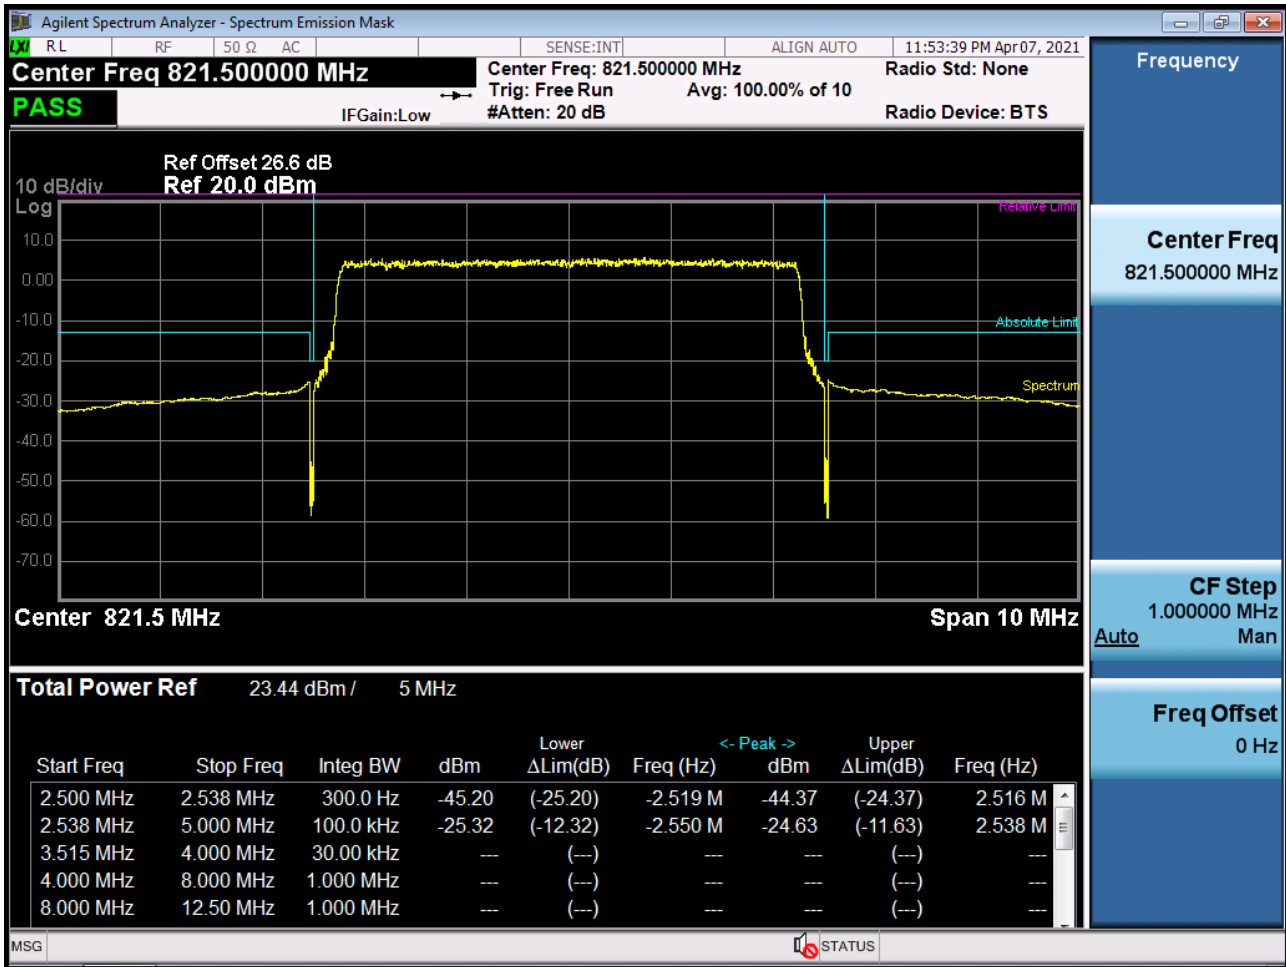


BAND 26. Conducted Spurious (26697 ch_1.4MHz_QPSK_RB 1_0)

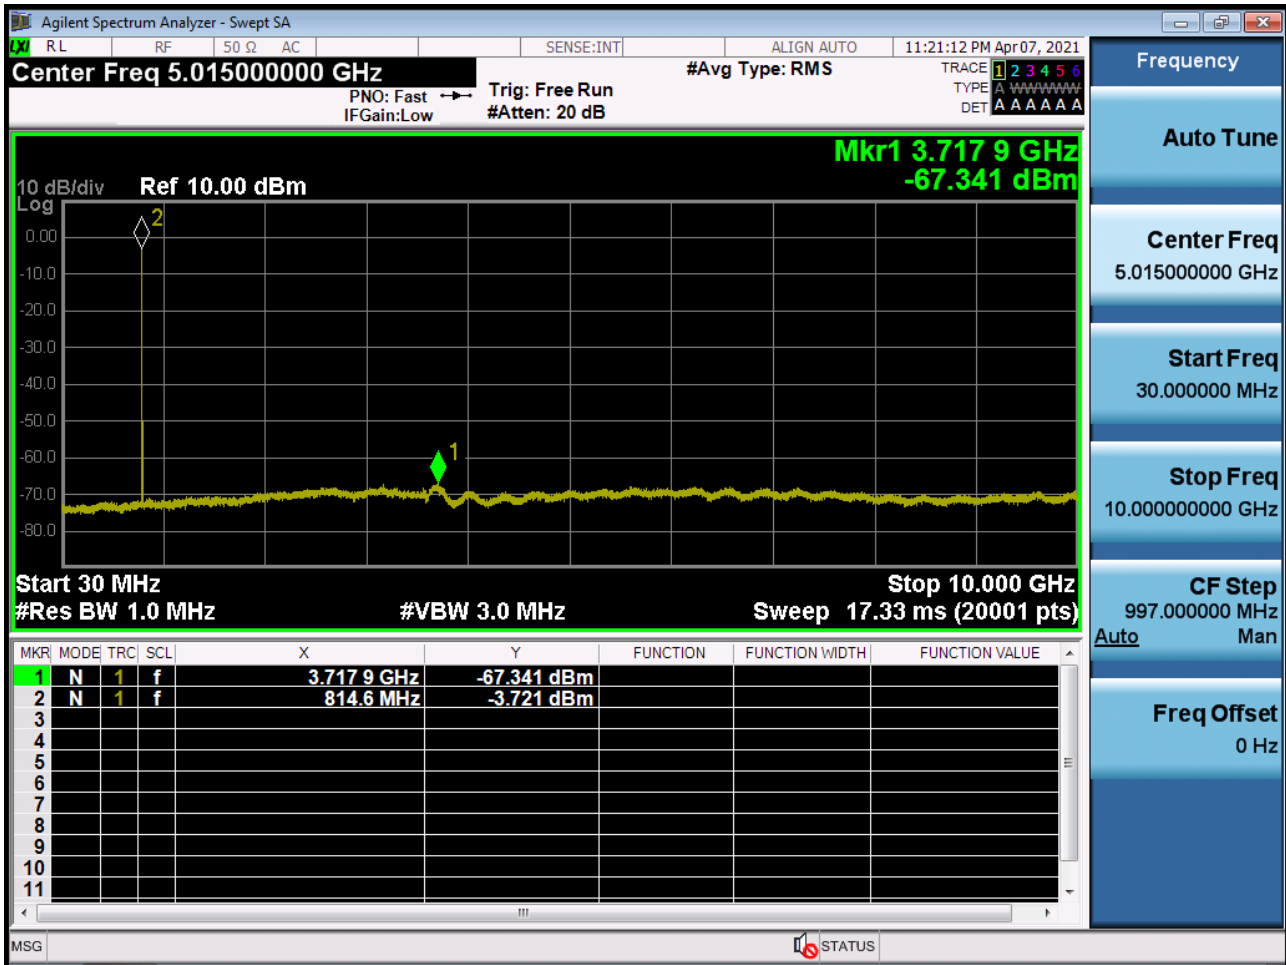


BAND 26. Conducted Spurious (26783 ch_1.4MHz_QPSK_RB 1_0)

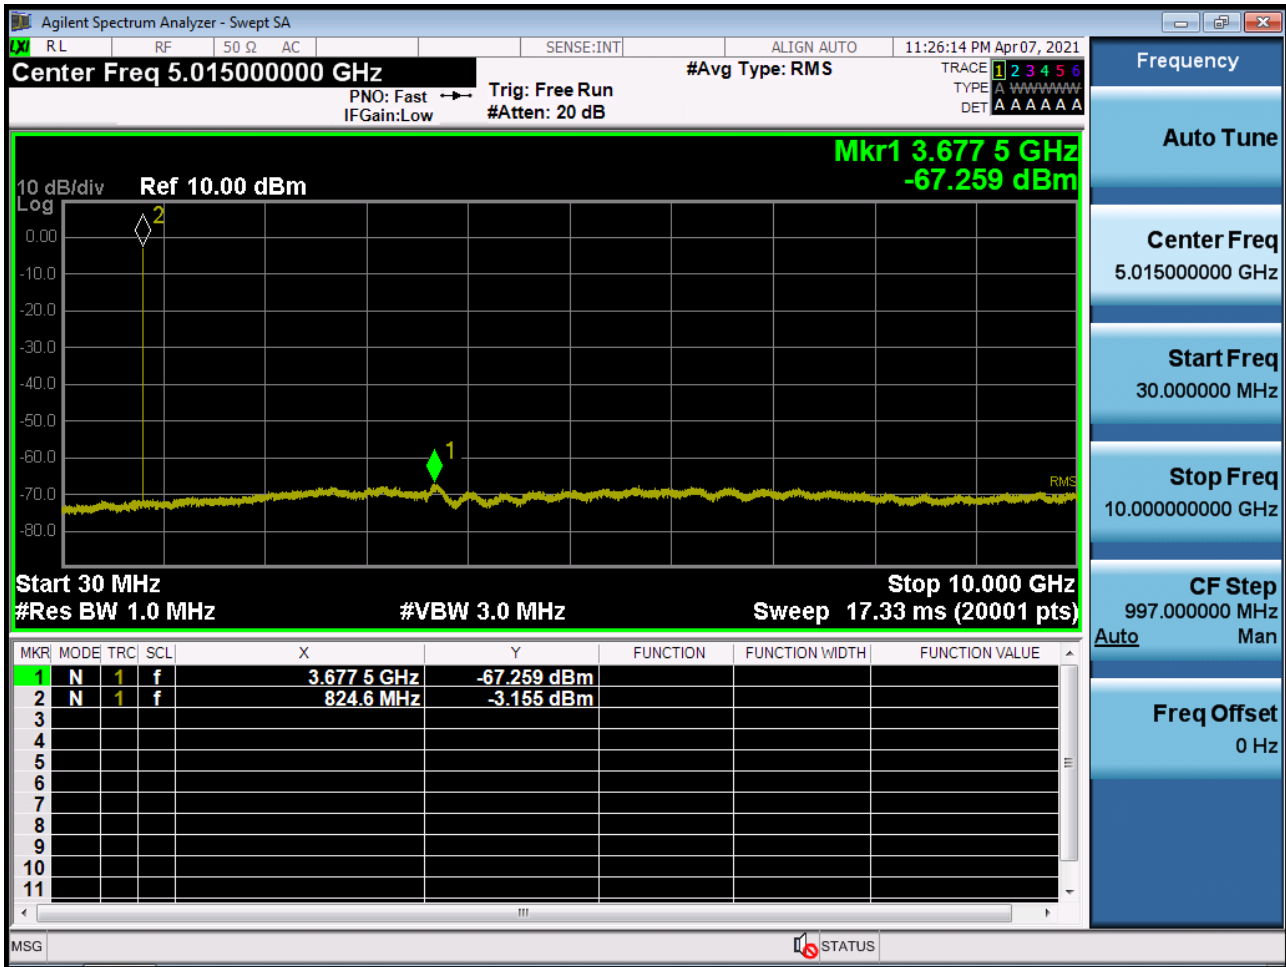


BAND 26. Conducted Spurious (26705 ch_3MHz_QPSK_RB 1_0)

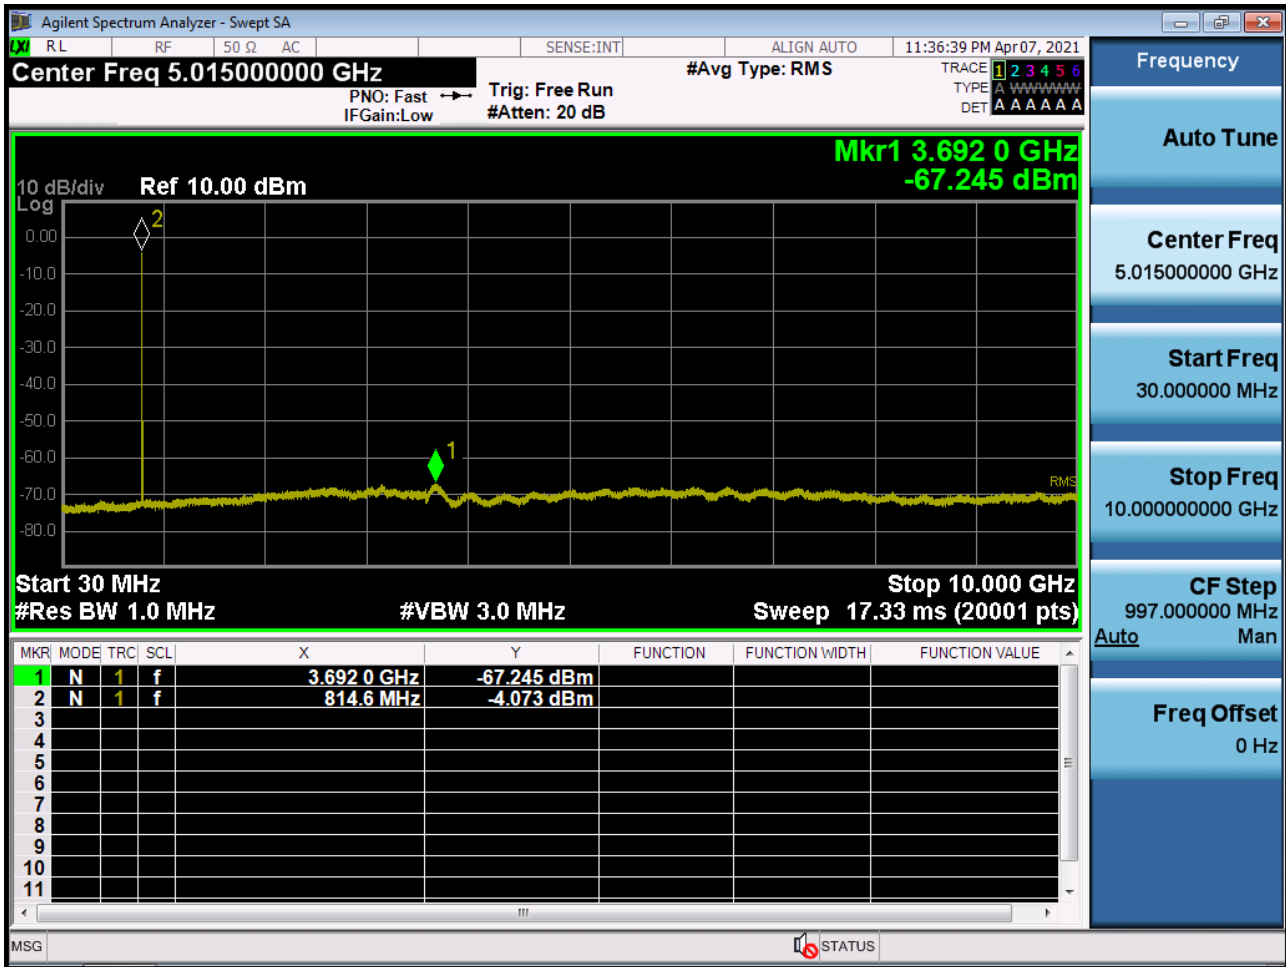


BAND 26. Conducted Spurious (26775 ch_3MHz_QPSK_RB 1_0)

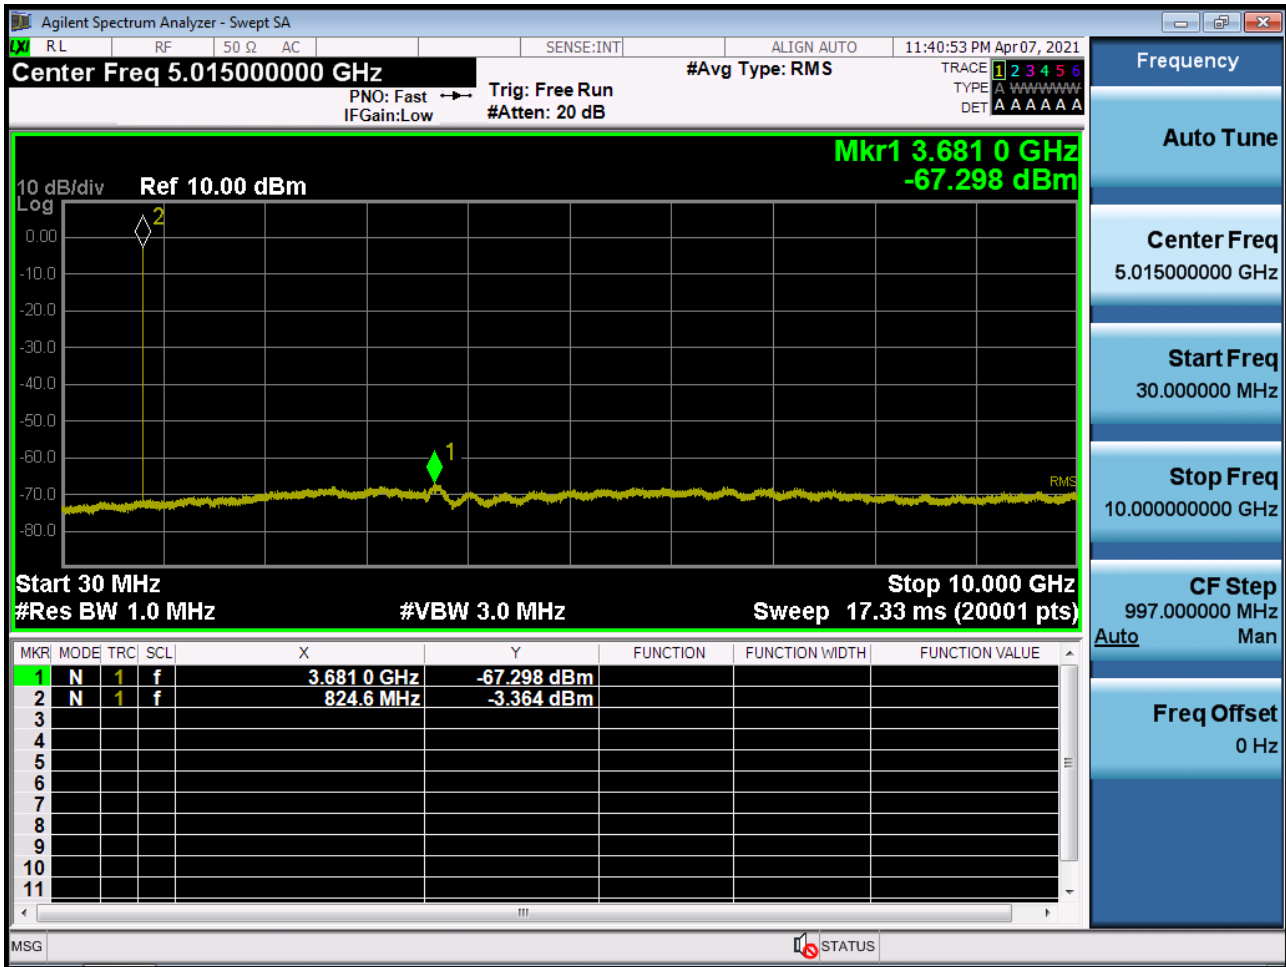


BAND 26. Conducted Spurious (26715 ch_5MHz_QPSK_RB 1_0)

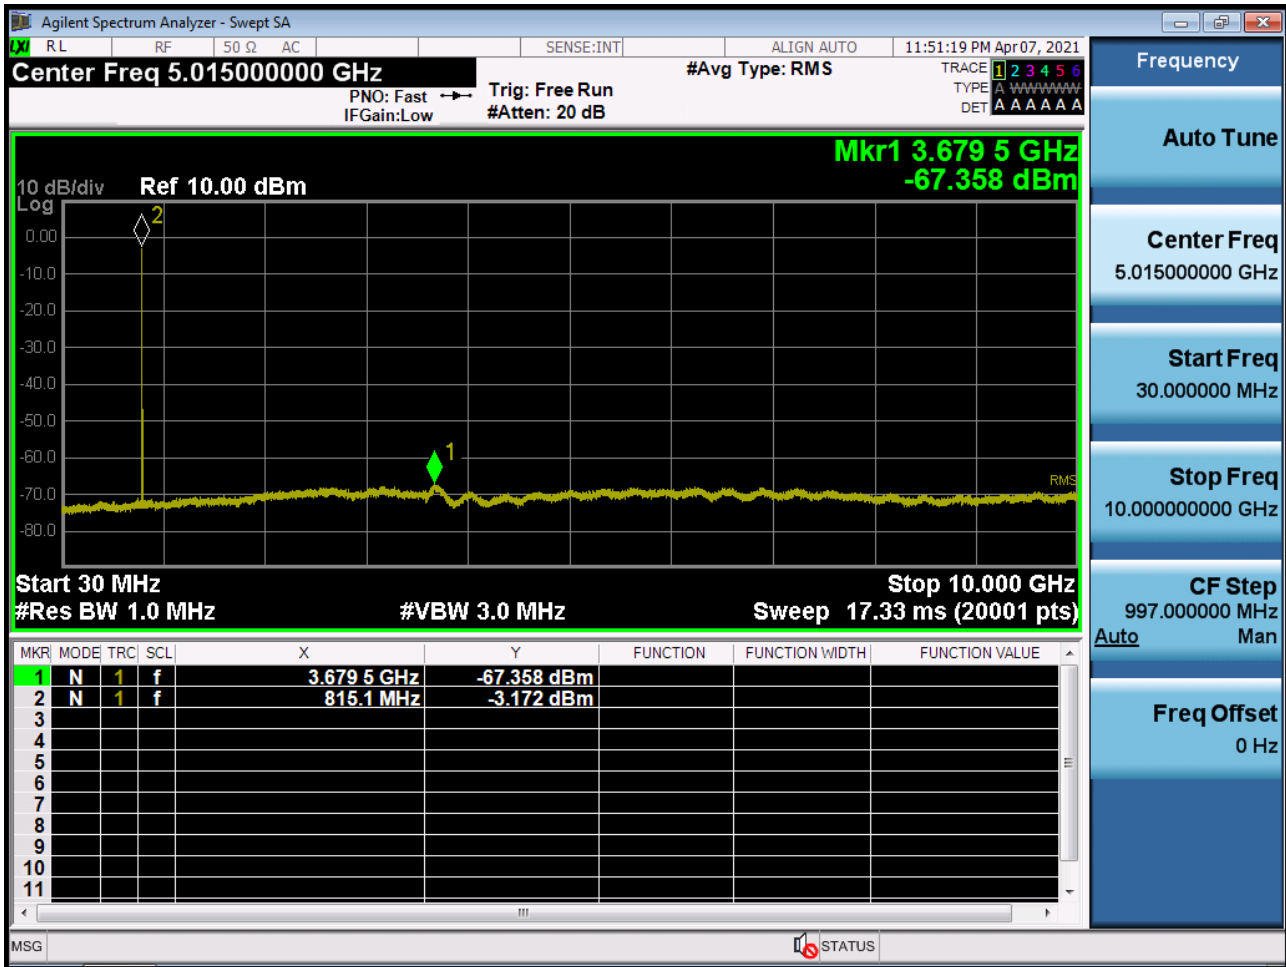


BAND 26. Conducted Spurious (26765 ch_5MHz_QPSK_RB 1_0)

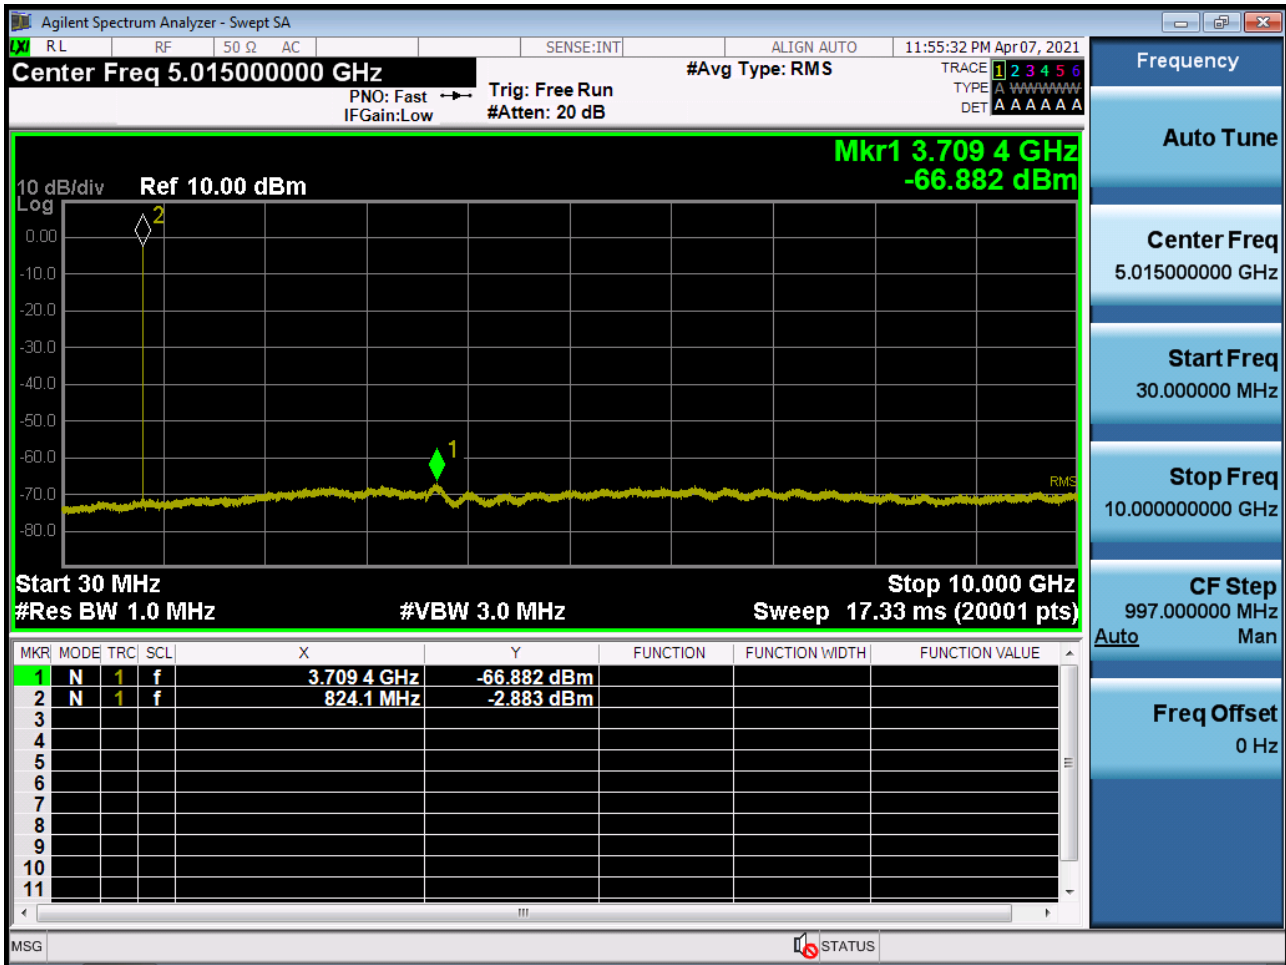

BAND 26. Conducted Spurious (26740 ch_10MHz_QPSK_RB 1_0)

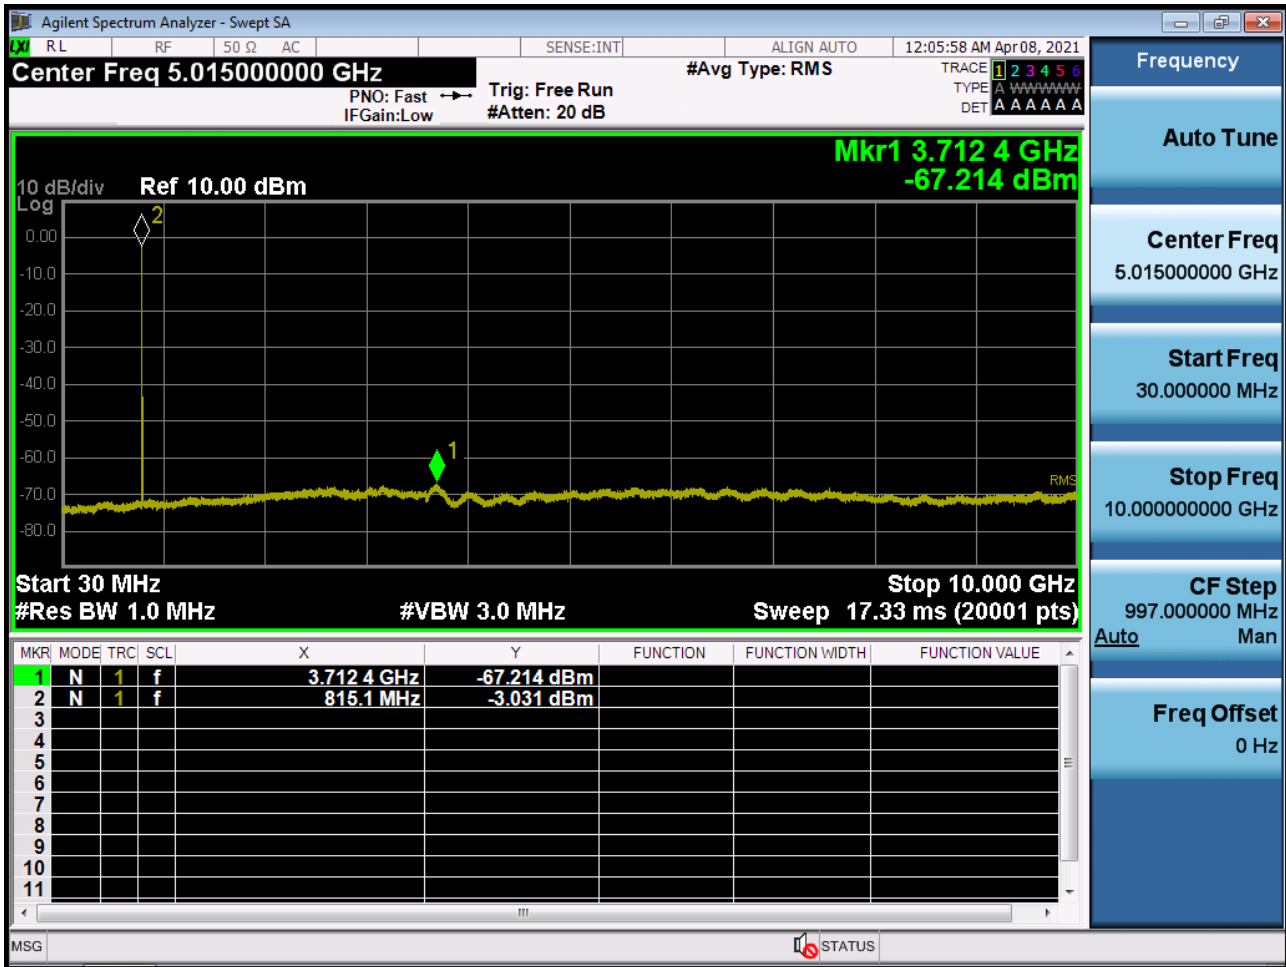


BAND 26. Conducted Spurious (26765 ch_15MHz_QPSK_RB 1_0)

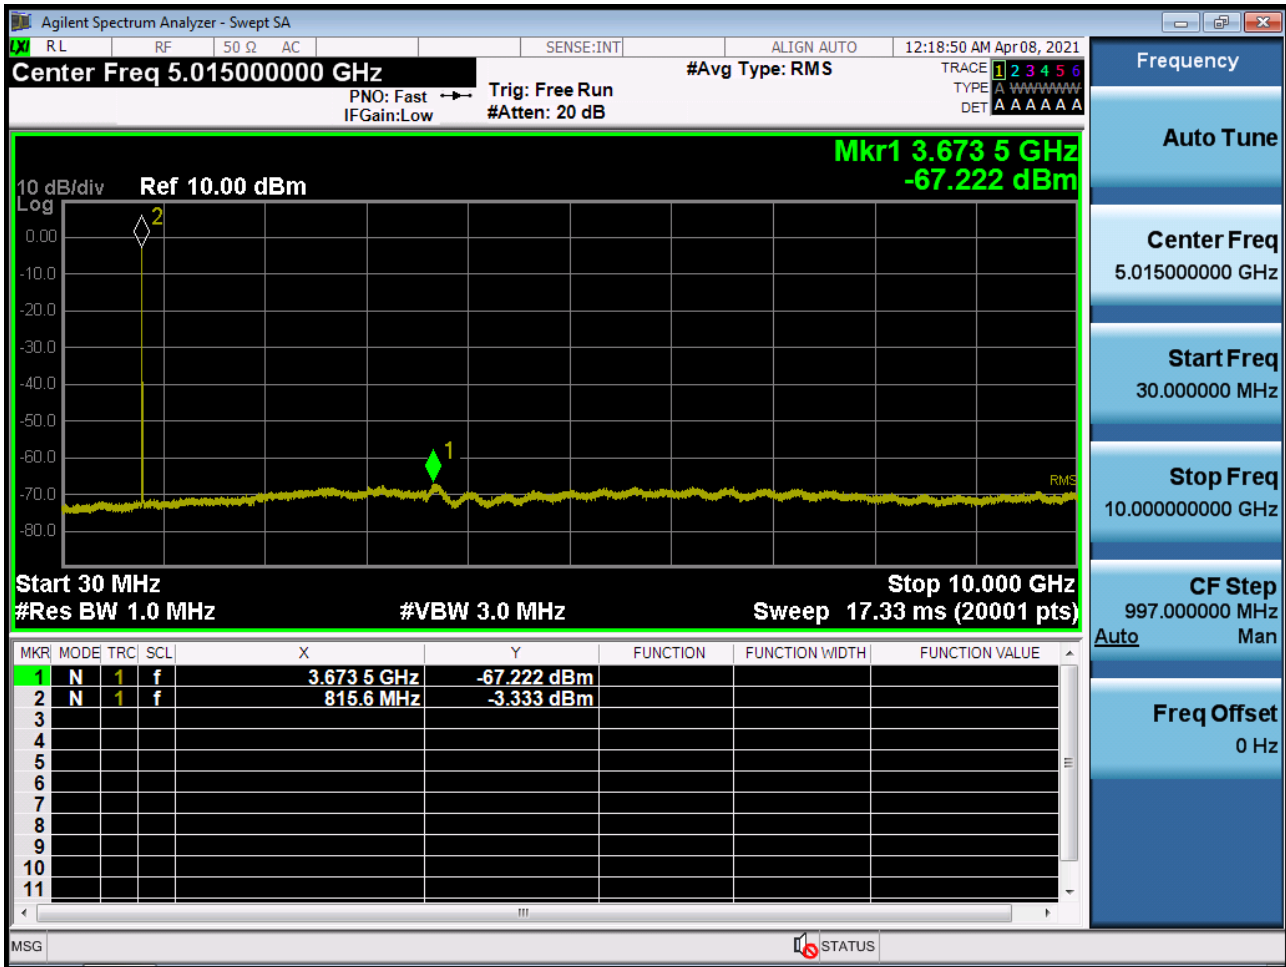


10. TEST PLOTS (STRADDLE CHANNEL)


BAND 26. Conducted Spurious (1.4MHz_QPSK_RB 1_0)

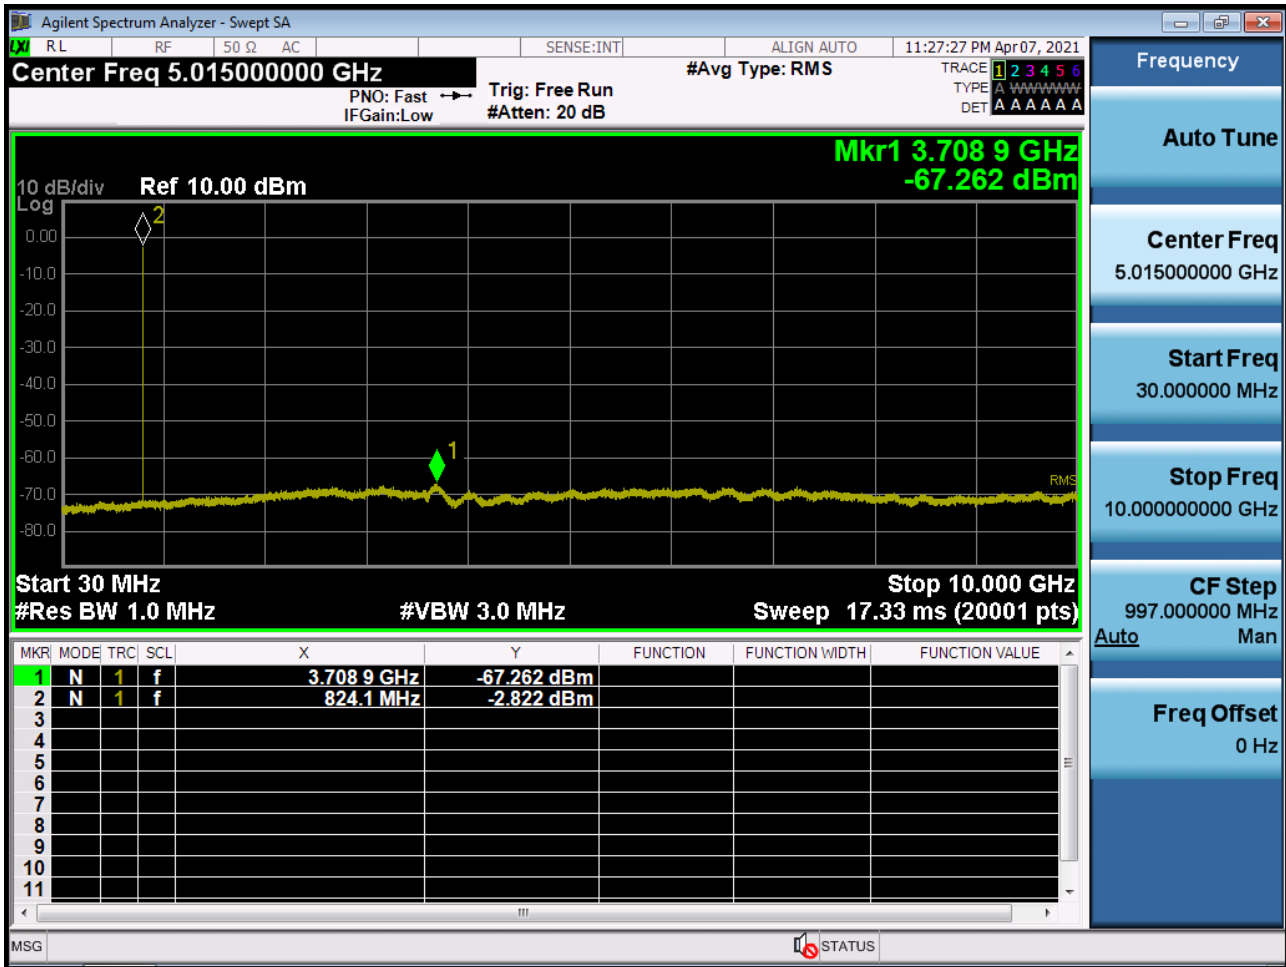


BAND 26. Conducted Spurious (3MHz_QPSK_RB 1_0)

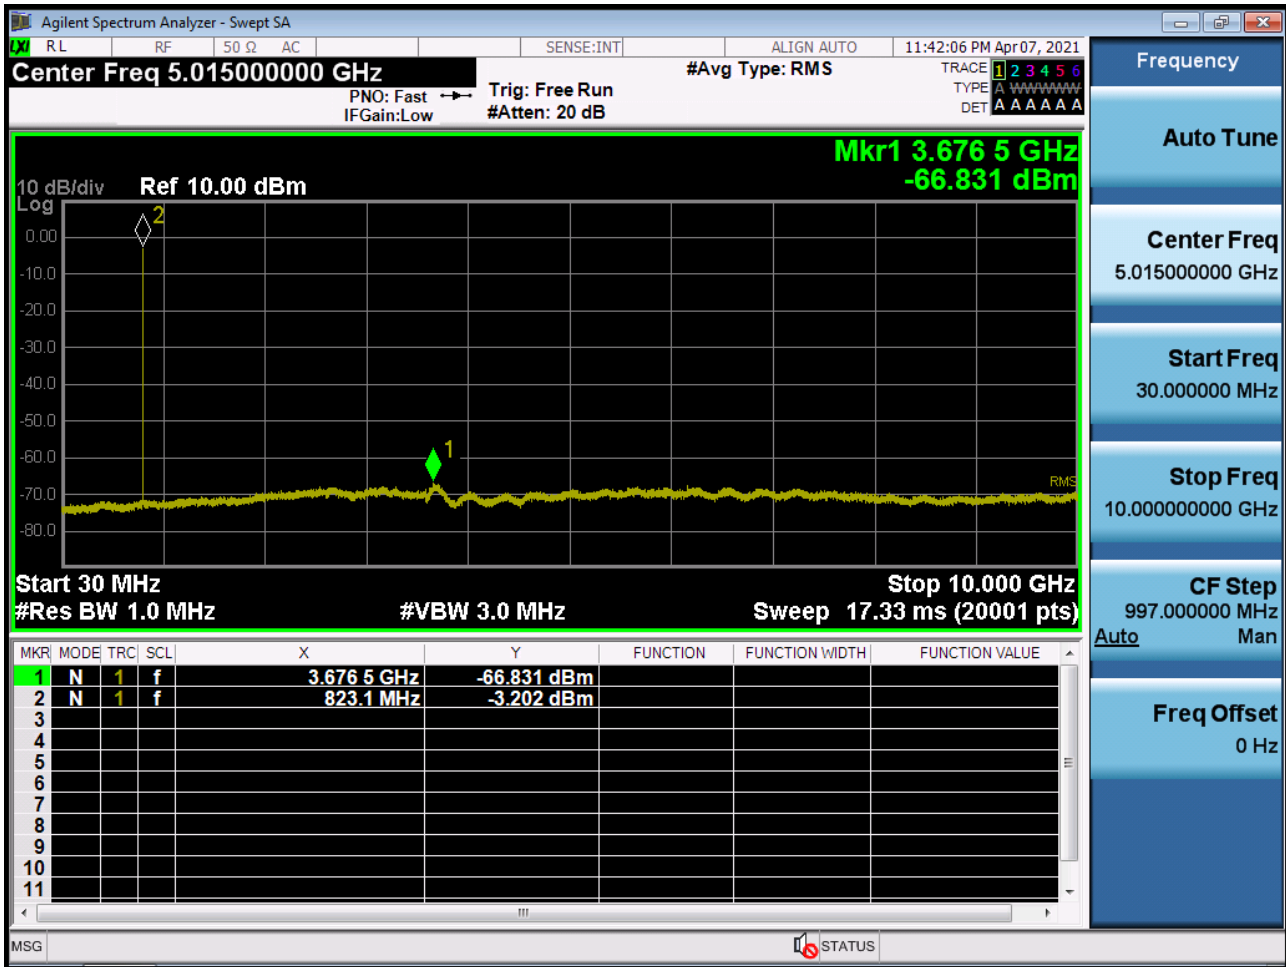


BAND 26. Conducted Spurious (5MHz_QPSK_RB 1_0)

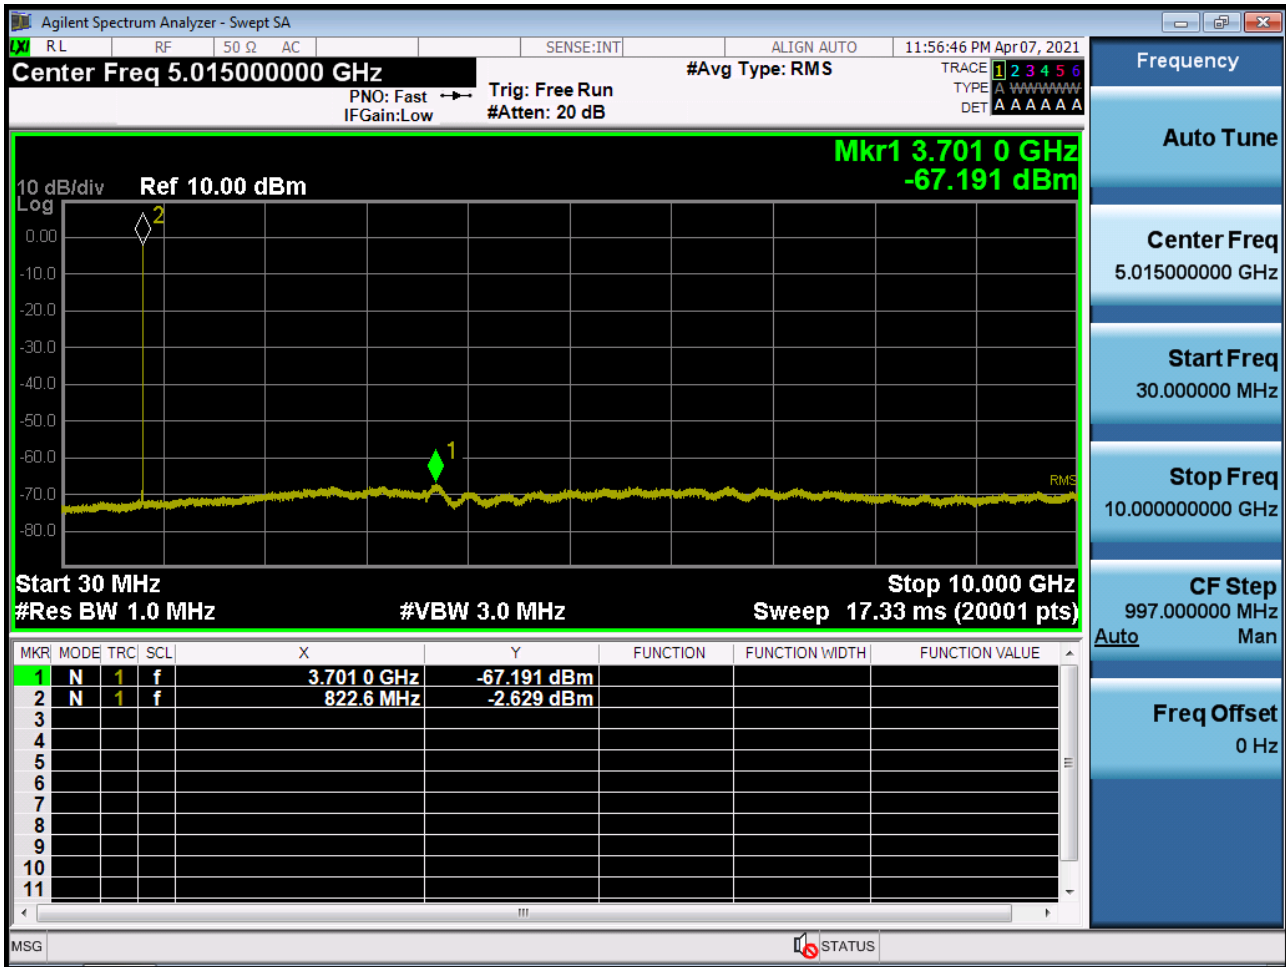


BAND 26. Conducted Spurious (10MHz_QPSK_RB 1_0)

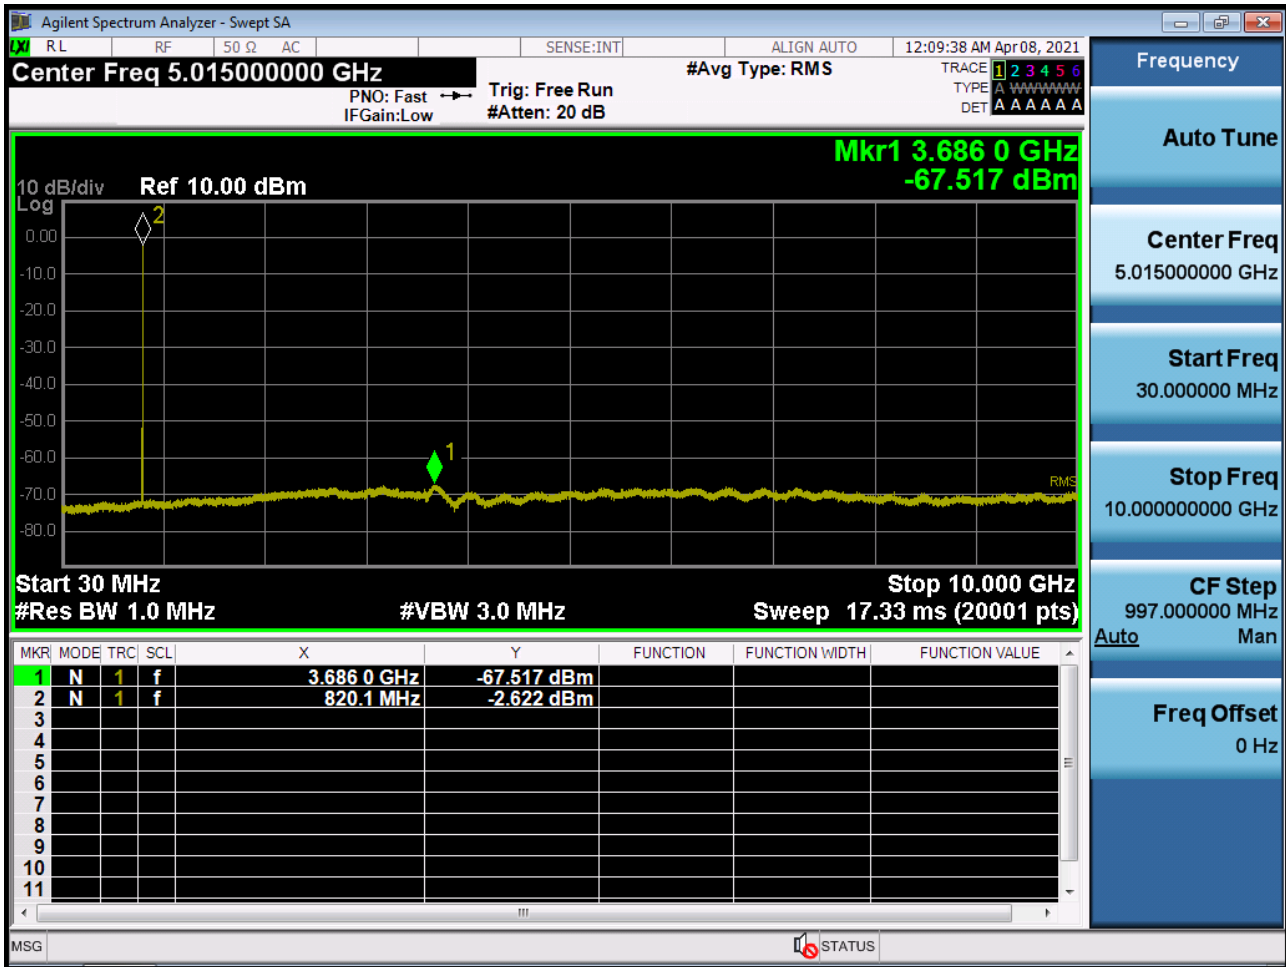


BAND 26. Channel Edge (1.4MHz_QPSK_RB 1_0)

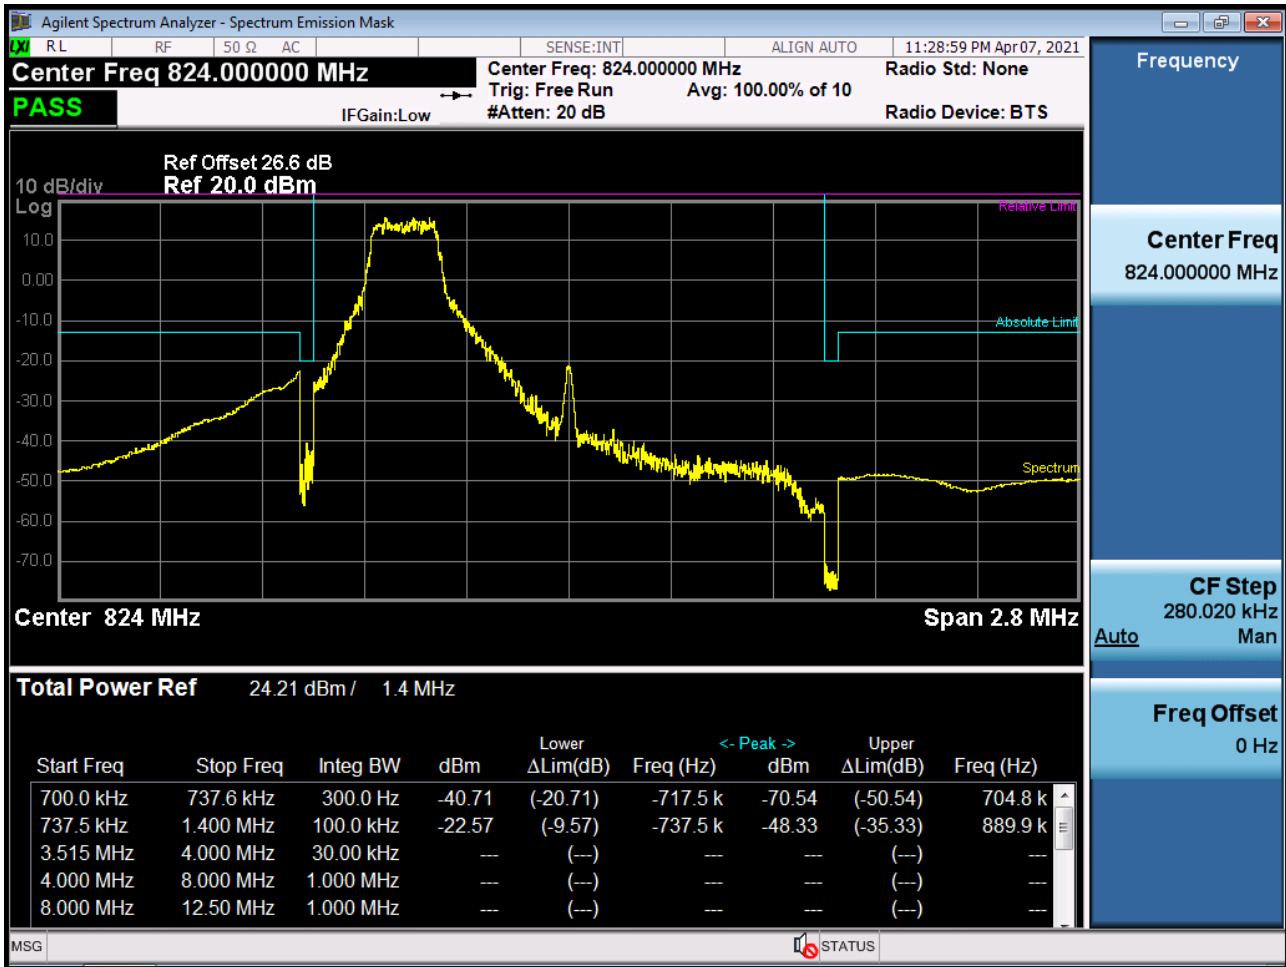


BAND 26. Channel Edge (1.4MHz_QPSK_RB 1_5)

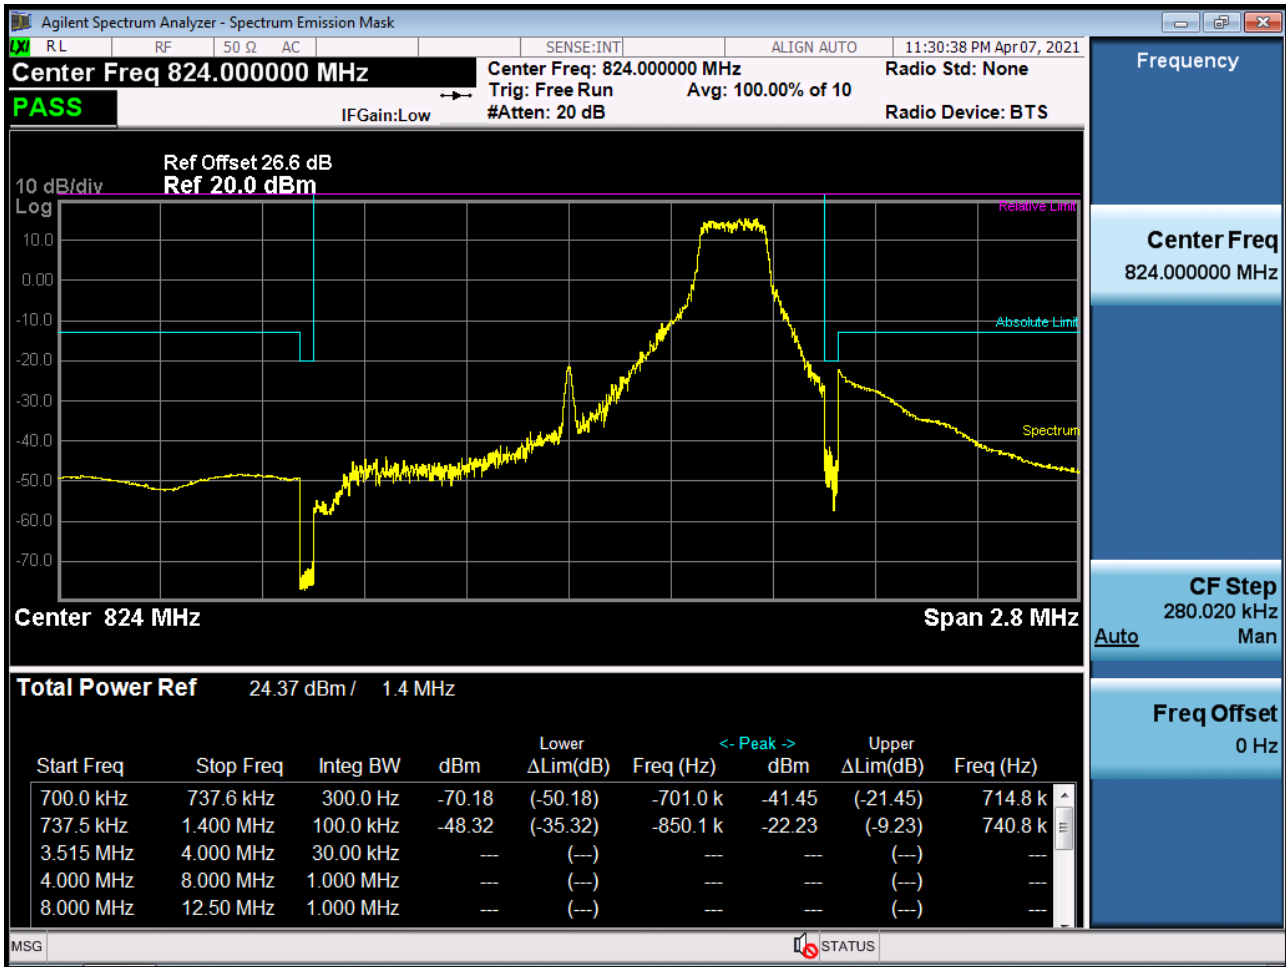


BAND 26. Channel Edge (1.4MHz_QPSK_Full RB)

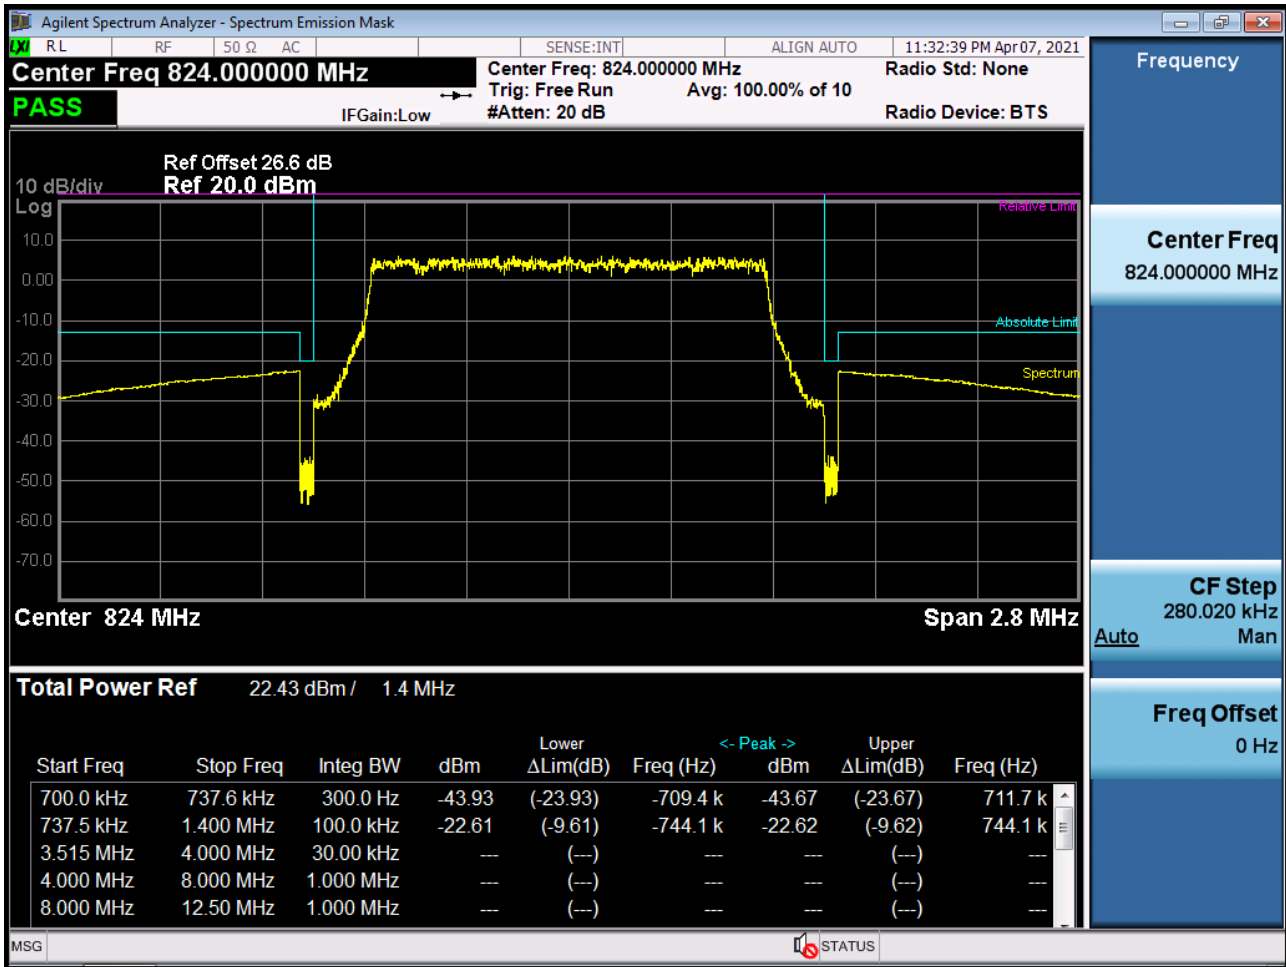


BAND 26. Channel Edge (3MHz_QPSK_RB 1_0)

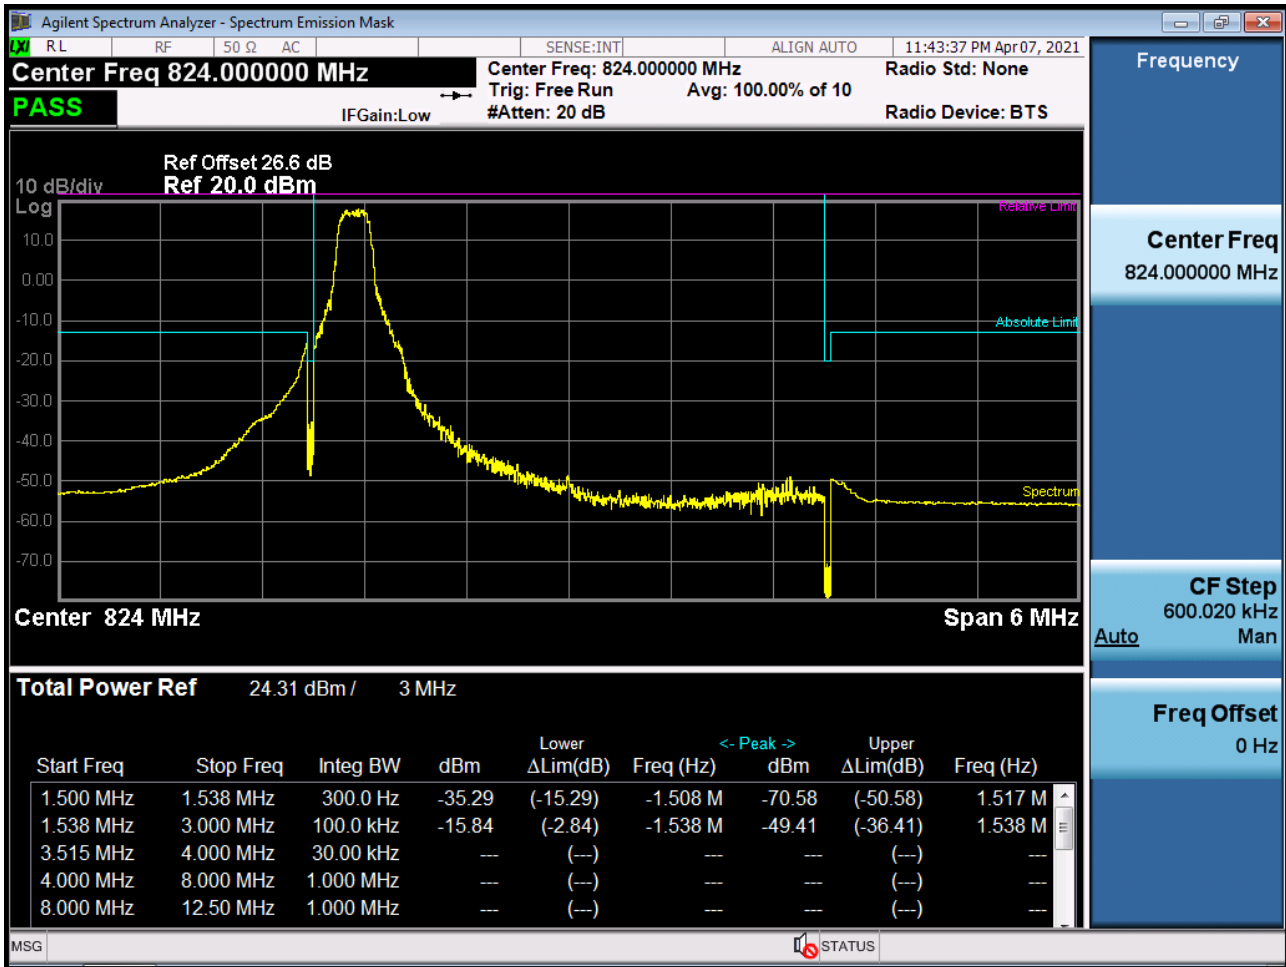


BAND 26. Channel Edge (3MHz_QPSK_RB 1_14)

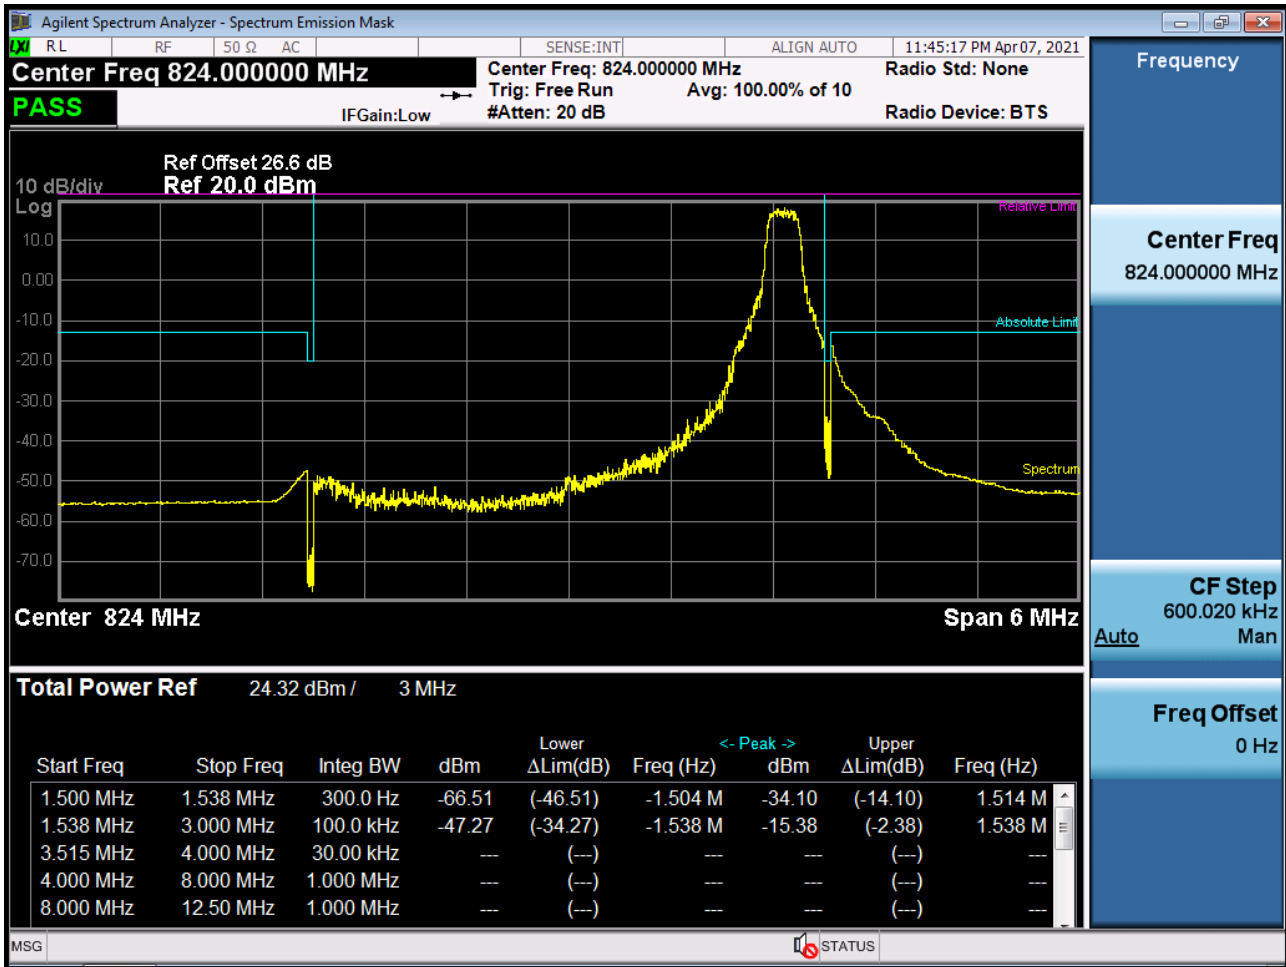


BAND 26. Channel Edge (3MHz_QPSK_Full RB)

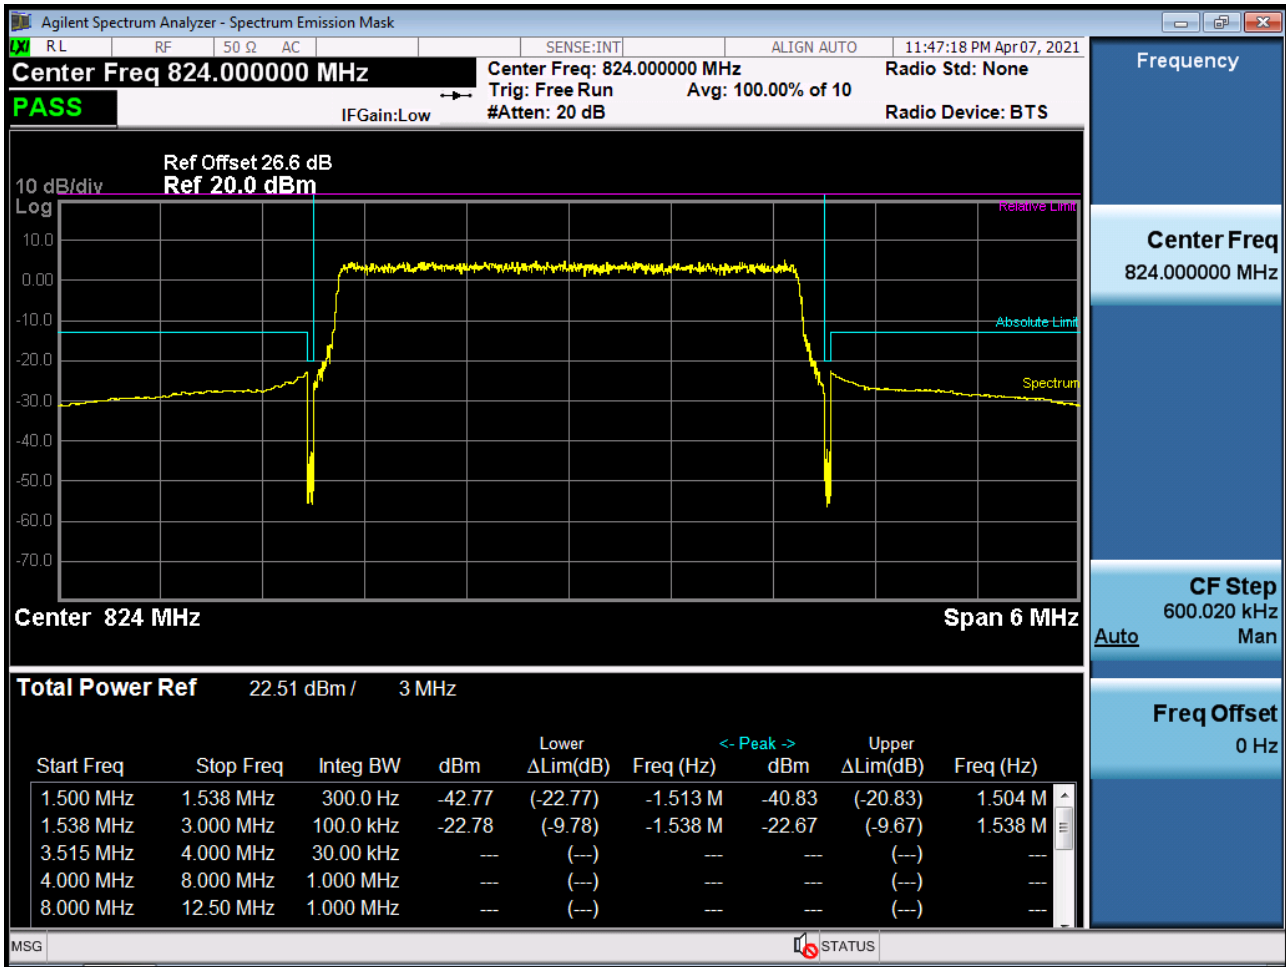


BAND 26. Channel Edge (5MHz_QPSK_RB 1_0)

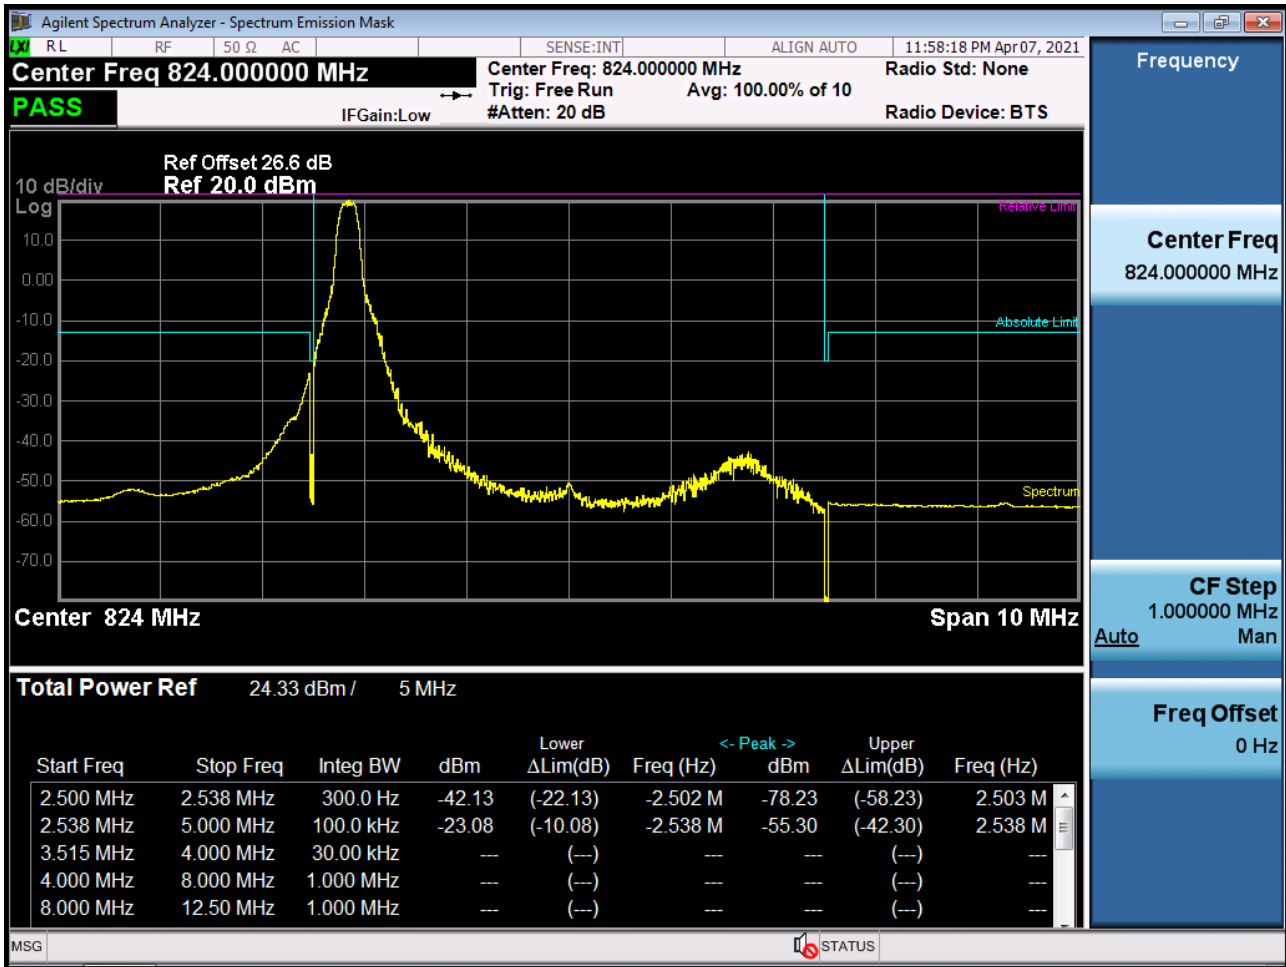


BAND 26. Channel Edge (5MHz_QPSK_RB 1_24)

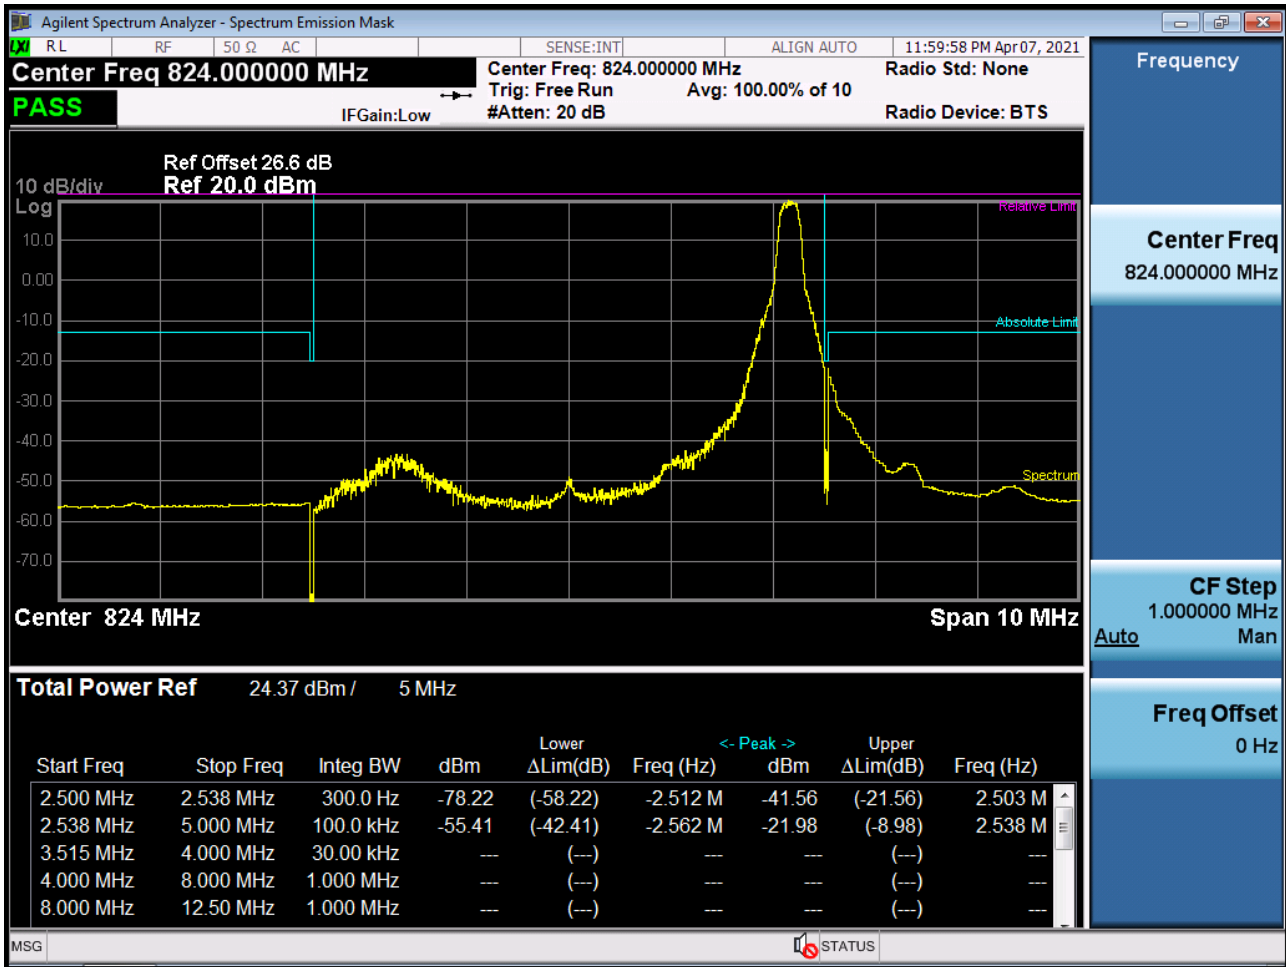


BAND 26. Channel Edge (5MHz_QPSK_Full RB)

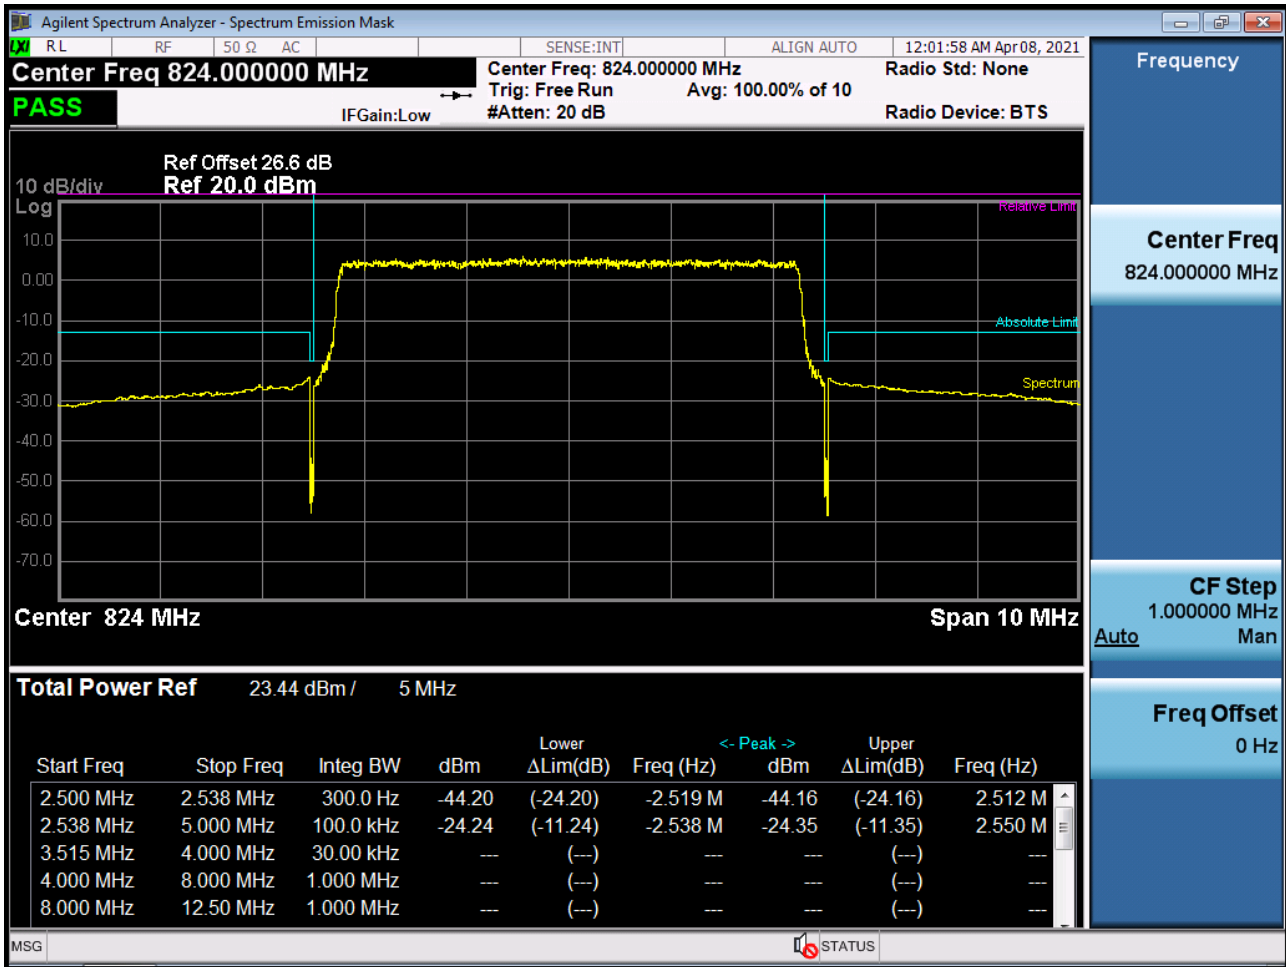


BAND 26. Channel Edge (10MHz_QPSK_RB 1_0)

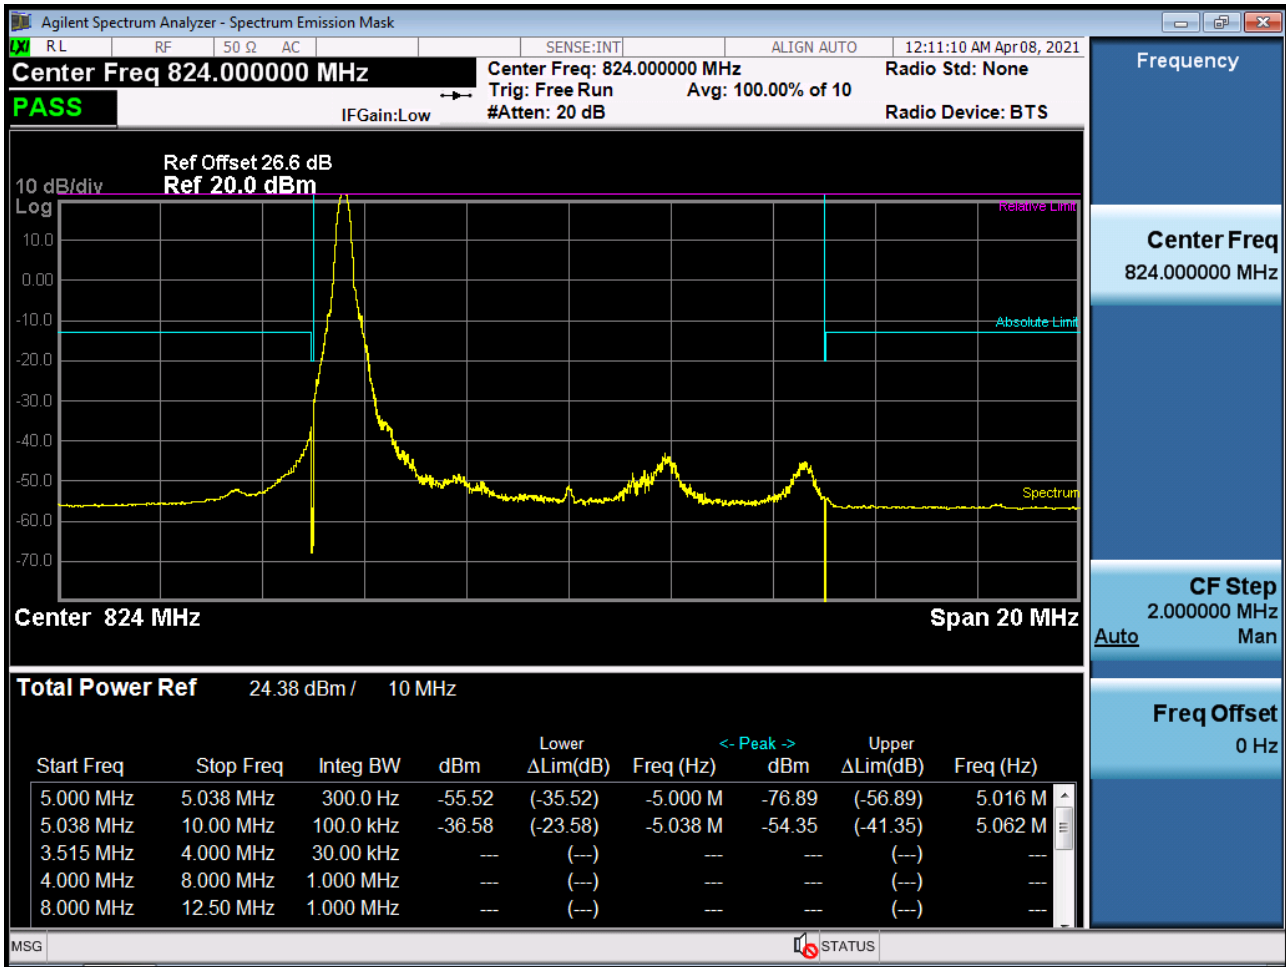


BAND 26. Channel Edge (10MHz_QPSK_RB 1_49)

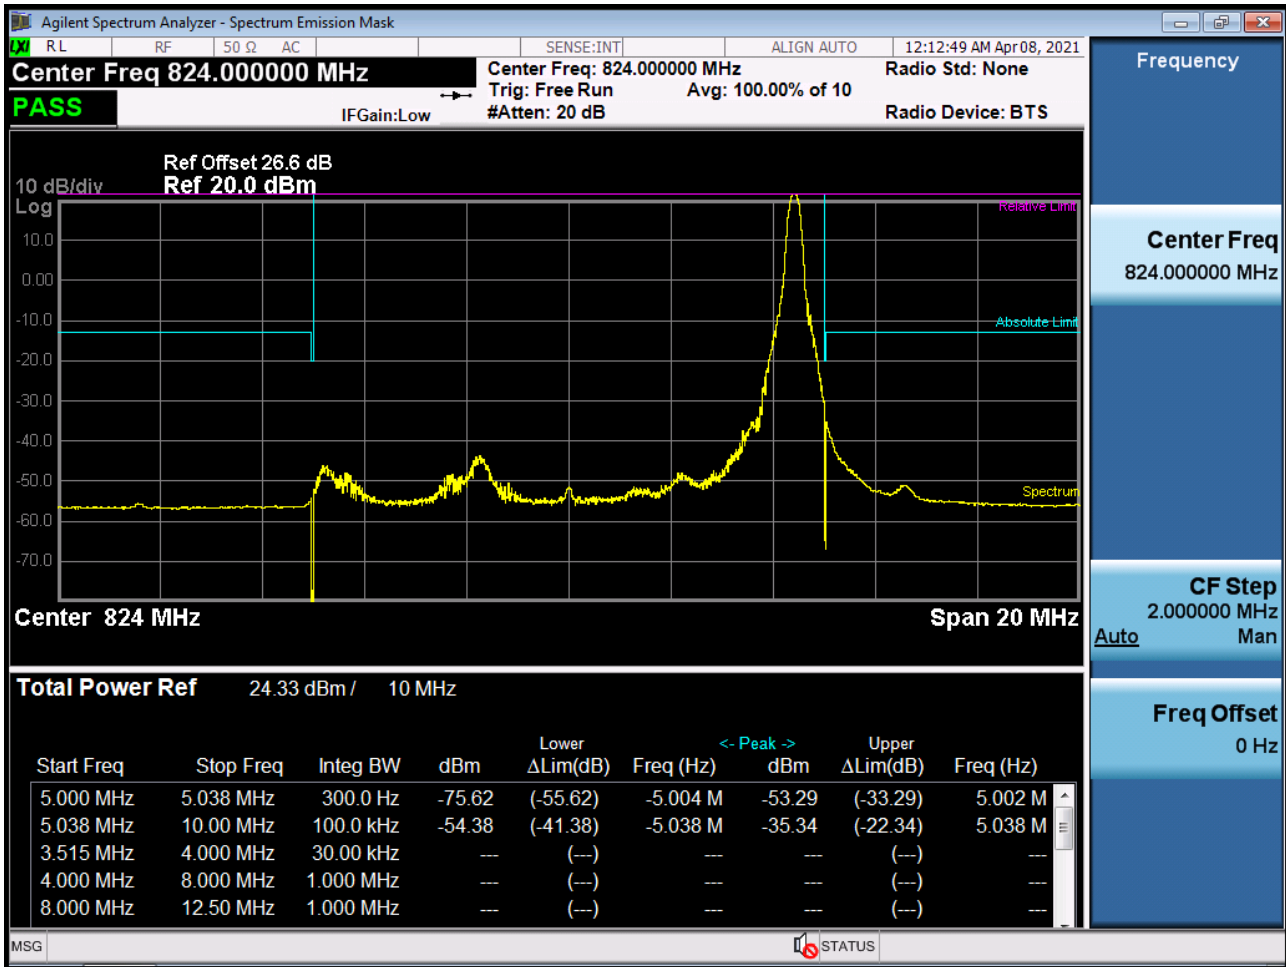


BAND 26. Channel Edge (10MHz_QPSK_Full RB)

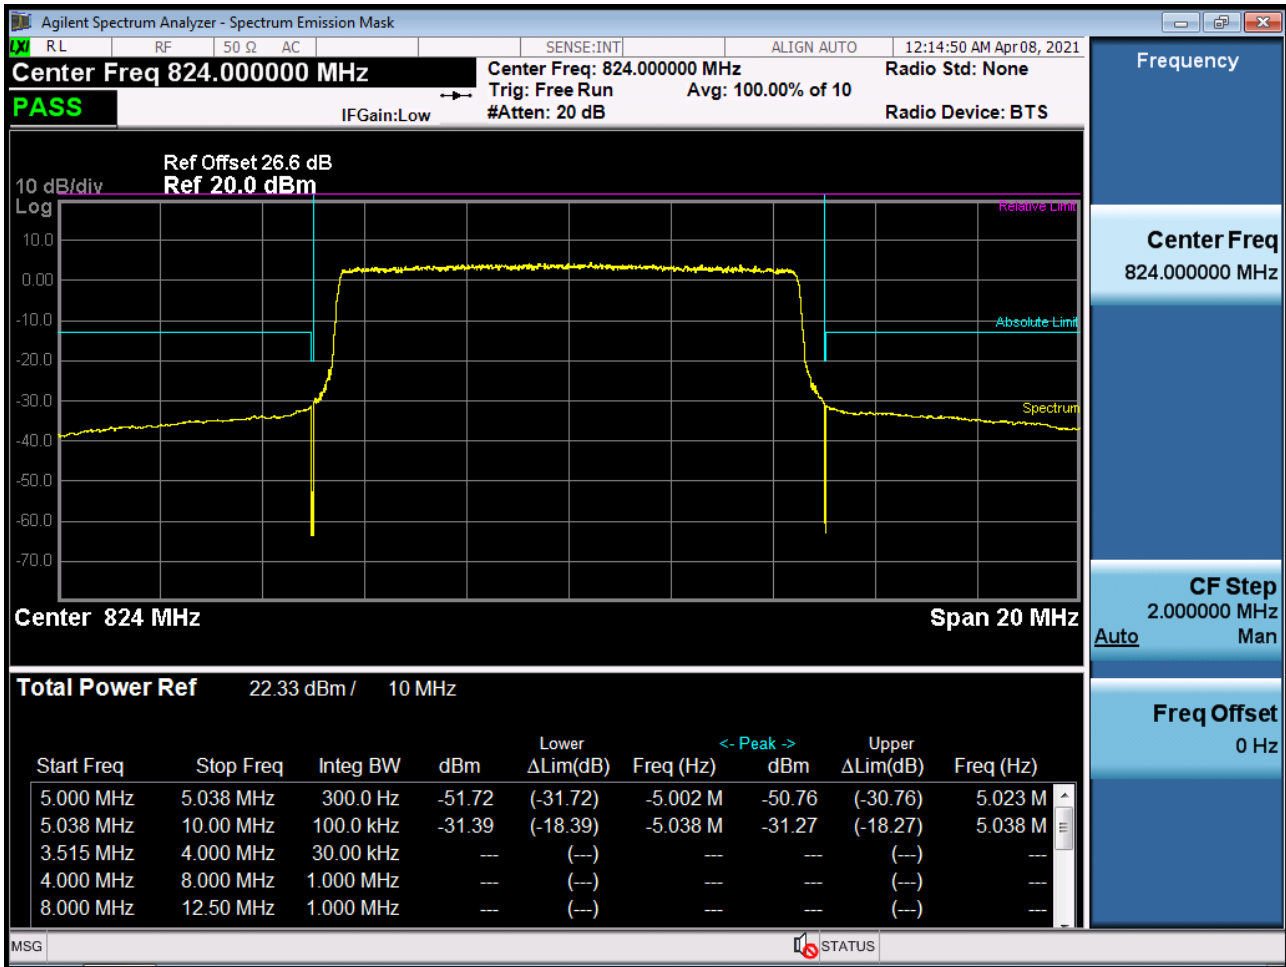


BAND 26. Band Edge (1.4MHz_QPSK_RB 1_5)

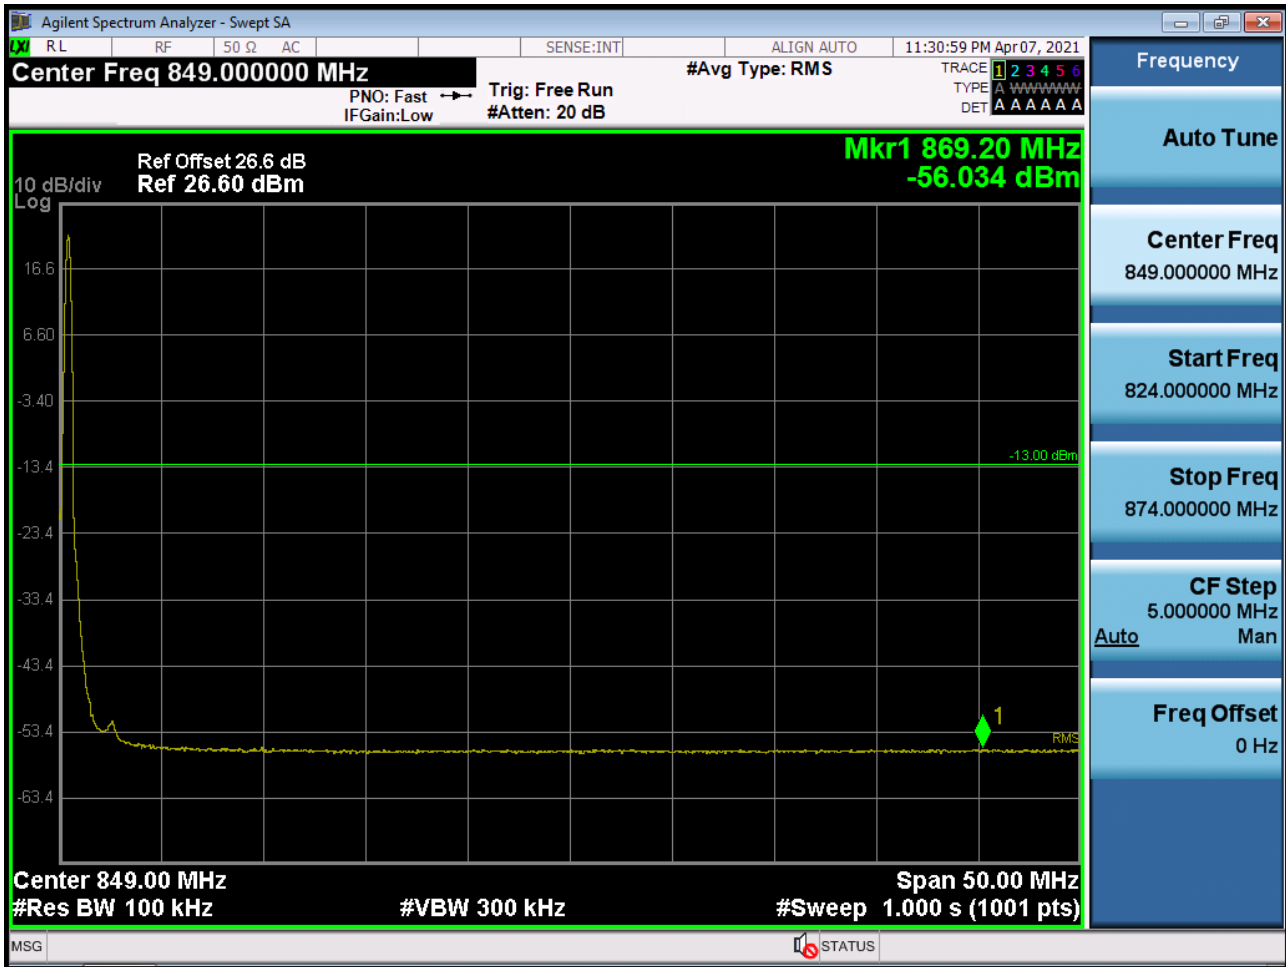

BAND 26. Band Edge (1.4MHz_QPSK_FullIRB)

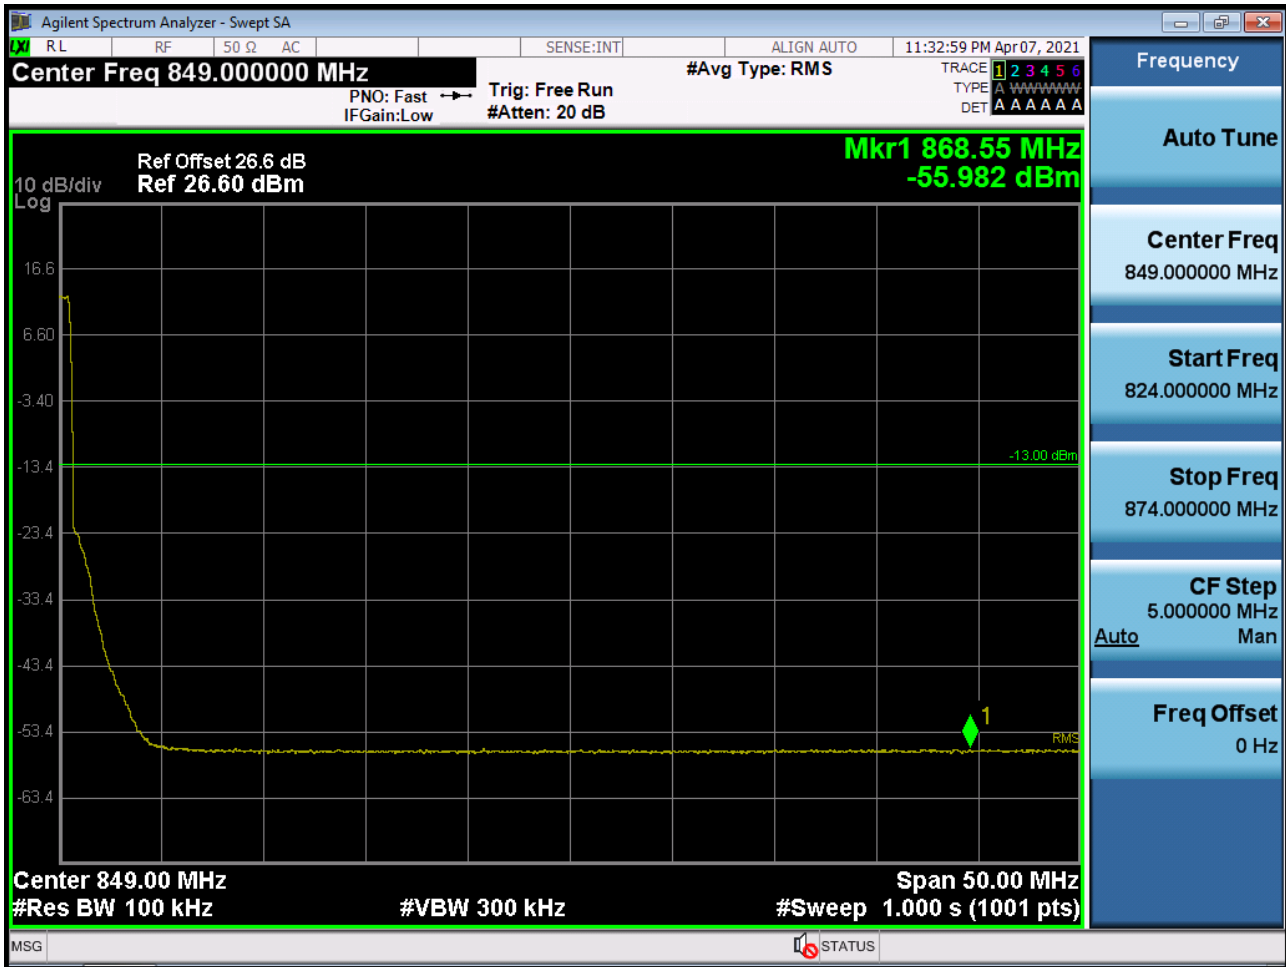


BAND 26. Band Edge (3MHz_QPSK_RB 1_14)

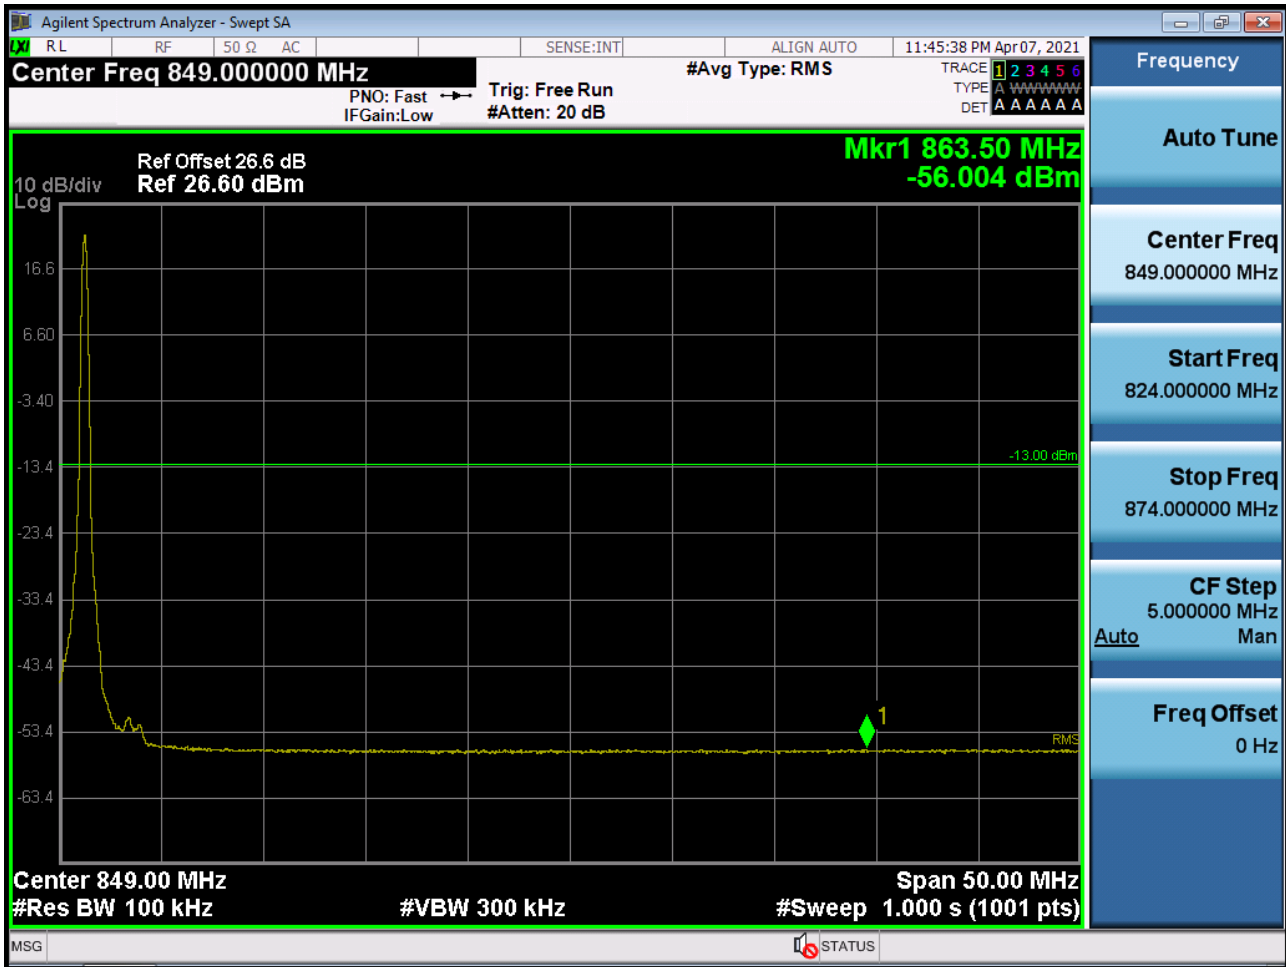

BAND 26. Band Edge (3MHz_QPSK_ Full RB)




BAND 26. Band Edge (5MHz_QPSK_RB 1_24)

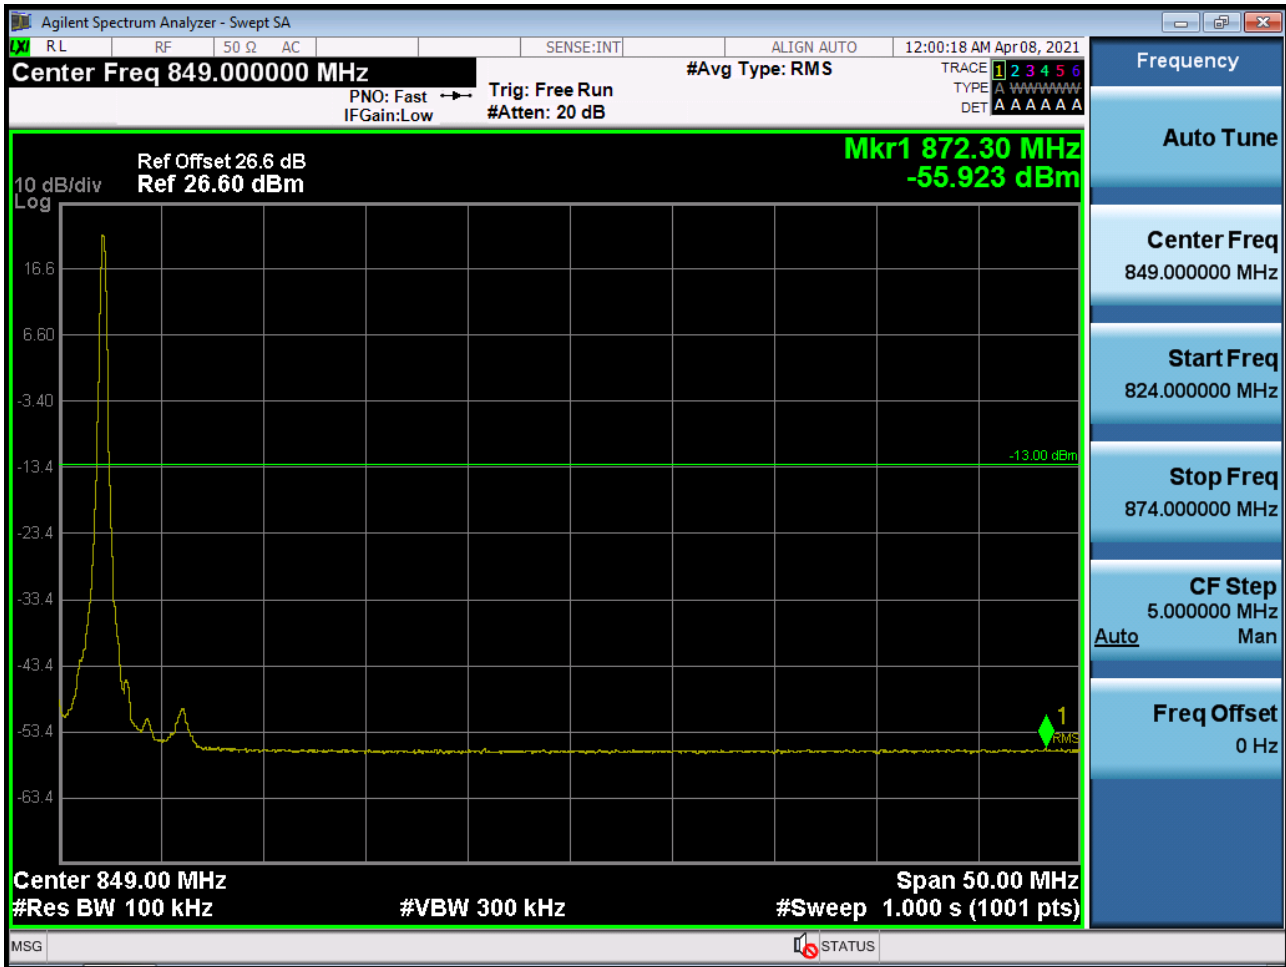

BAND 26. Band Edge (5MHz_QPSK_ Full RB)



BAND 26. Band Edge (10MHz_QPSK_RB 1_49)

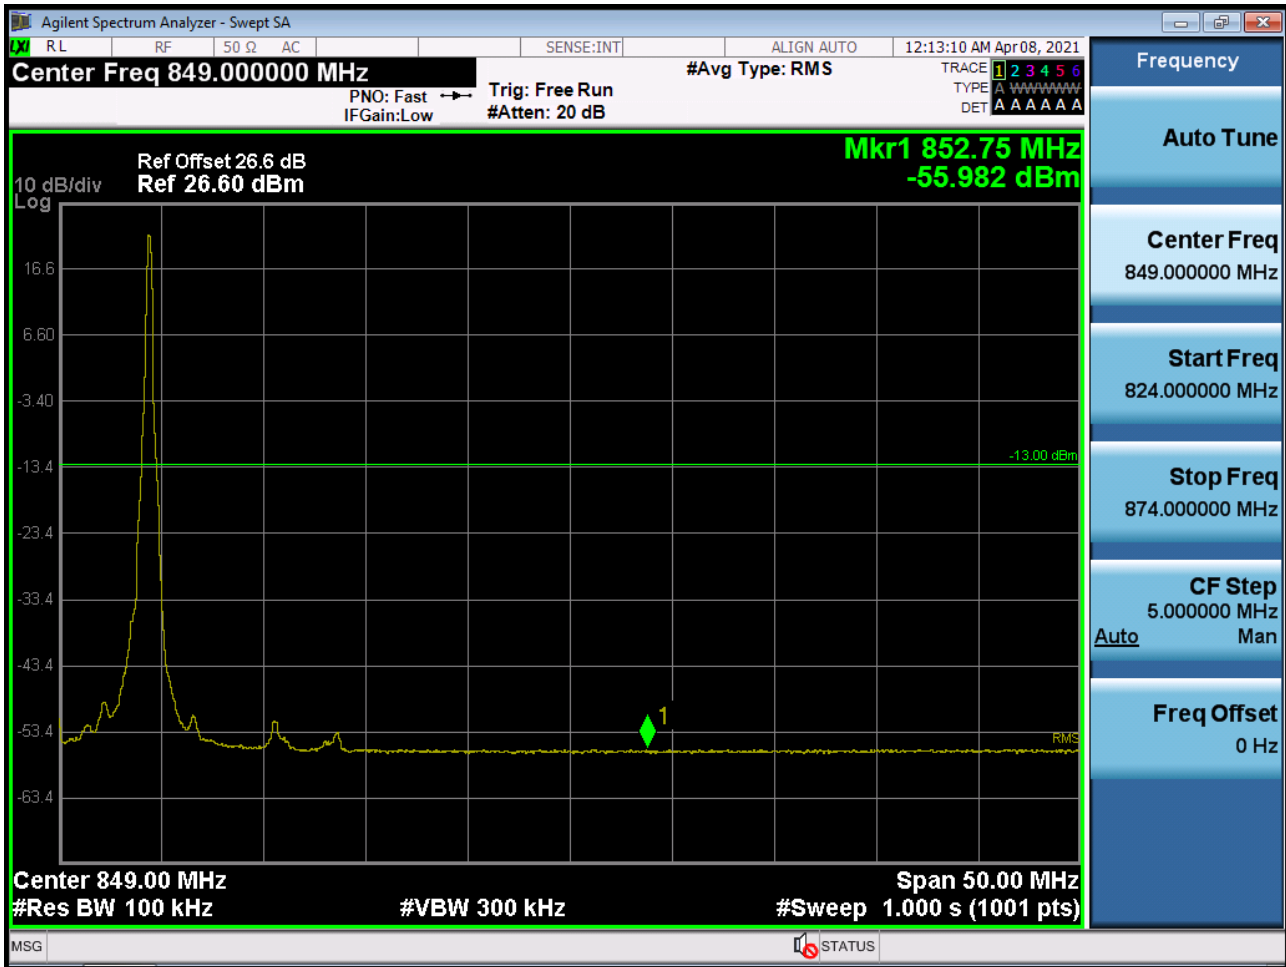

BAND 26. Band Edge (10MHz_QPSK_ Full RB)



11 ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2105-FC023-P