

# HAC T-COIL Test Report

**Applicant Name:**  
**SAMSUNG Electronics Co., Ltd.**  
129, Samsung-ro, Yeongtong-gu, Suwon-Si, Gyeonggi-do,  
16677 Rep. of Korea

**Date of Issue:** Jun. 15, 2021  
**Test Report No.:** HCT-SR-2105-FC005-R2  
**Test Site:** HCT CO., LTD.

**FCC ID**

**A3LSMG990U**

|                               |                                      |
|-------------------------------|--------------------------------------|
| <b>Equipment Type:</b>        | <b>Mobile Phone</b>                  |
| <b>Application Type</b>       | <b>Certification</b>                 |
| <b>FCC Rule Part(s):</b>      | <b>CFR §20.19 , ANSI C63.19-2011</b> |
| <b>Model Name:</b>            | <b>SM-G990U</b>                      |
| <b>Additional Model Name:</b> | <b>SM-G990U1/DS, SM-G990U1</b>       |
| <b>Date of Test:</b>          | <b>04/19/2021 ~ 05/12/2021</b>       |

**C63.19-2011**  
**HAC Category**

**T3 (T-COIL CATEGORY)**

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and had been tested in accordance with the specified measurement procedures. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Tested By**



**Hui-Jun, Yun**  
**Test Engineer**  
**SAR Team**  
**Certification Division**

**Reviewed By**



**Yun-jeang, Heo**  
**Technical Manager**  
**SAR Team**  
**Certification Division**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

**REVISION HISTORY**

The revision history for this test report is shown in table.

| <b>Revision No.</b> | <b>Date of Issue</b> | <b>Description</b>         |
|---------------------|----------------------|----------------------------|
| 0                   | May. 26, 2021        | Initial Release            |
| 1                   | Jun. 08, 2021        | Revised Section 3.1        |
| 2                   | Jun. 15, 2021        | Add Additional Model Name. |

This test results were applied only to the test methods required by the standard.

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

## Table of Contents

|  |     |
|--|-----|
| 1. Test Regulations .....                                | 4   |
| 2. ATTESTATION OF TEST RESULT OF DEVICE UNDER TEST ..... | 5   |
| 3. DEVICE UNDER TEST DESCRIPTION.....                    | 6   |
| 4. Test Methodology .....                                | 7   |
| 5. Measuring Instrument Calibraion .....                 | 8   |
| 6. Measurement Uncertainty.....                          | 9   |
| 7. Test Procedures for all Technologies .....            | 10  |
| 8. Audio Level and Gain Measurements.....                | 14  |
| 9 T-coil Measurement Criteria .....                      | 16  |
| 10. Device Under Test.....                               | 18  |
| 11. Air Interfaces and Operating Mode .....              | 19  |
| 12. HAC (T-coil) Test Results .....                      | 19  |
| Attachment 1. HAC T-COIL Test Plots .....                | 41  |
| Attachment 2. HAC T-Coil Probe Certificates .....        | 238 |

## 1. Test Regulations

The tests were performed according to the following regulations:

|               |   |
|---------------|---|
| Test Standard | FCC 47 CFR §20.19 ANSI C63.19-2011  |
| Test Method   | <ul style="list-style-type: none"><li>• FCC CFR47 Part 20.19</li><li>• ANSI C63.19 2011-version</li><li>• FCC KDB 285076 D01 HAC Guidance v05r01</li><li>• FCC KDB 285076 D02 T Coil testing v03r01</li><li>• FCC KDB 285076 D03 HAC FAQ v01r04</li></ul> |

## 2. ATTESTATION OF TEST RESULT OF DEVICE UNDER TEST

| Test Laboratory |  |
|-----------------|--|
| Company Name:   | HCT Co., LTD   |
| Address:        | 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of Korea |
| Telephone:      | +82 31 645 6300  |
| Fax.:           | +82 31 645 6401  |

| Attestation of SAR test result |                               |
|--------------------------------|-------------------------------|
| Applicant Name:                | SAMSUNG Electronics Co., Ltd. |
| Model:                         | SM-G990U                      |
| Additional Model Name:         | SM-G990U1/DS, SM-G990U1       |
| EUT Type:                      | Mobile Phone                  |
| Application Type:              | Certification                 |

### 2.1 Test Methodology

The Tests document in this report were performed in accordance with ANSI C63.19-2011 method of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids, FCC published KDB 285076 D01 HAC Guidance v05r01, FCC published KDB 285076 D02 HAC T-Coil Testing v03r01, FCC Published KDB285076 D03 HAC FAQ v01r04 and TCB Workshop updates .

### 3. DEVICE UNDER TEST DESCRIPTION

#### 3.1 DUT specification

| Device Wireless specification overview |                |                             |
|--|----------------|-----------------------------|
| Band & Mode                            | Operating Mode | Tx Frequency                |
| CDMA/EVDO BC10                         | Voice / Data   | 817.90 MHz ~ 823.10 MHz     |
| CDMA/EVDO BC0                          | Voice / Data   | 824.70 MHz ~ 848.31 MHz     |
| CDMA/EVDO BC1                          | Voice / Data   | 1 851.25 MHz ~ 1 908.75 MHz |
| GSM850                                 | Voice / Data   | 824.2 MHz ~ 848.8 MHz       |
| GSM1900                                | Voice / Data   | 1 850.2 MHz ~ 1 909.8 MHz   |
| UMTS 850                               | Voice / Data   | 826.4 MHz ~ 846.6 MHz       |
| UMTS 1700                              | Voice / Data   | 1 712.4 MHz ~ 1 752.6 MHz   |
| UMTS 1900                              | Voice / Data   | 1 852.4 MHz ~ 1 907.6 MHz   |
| LTE Band 2 (PCS)                       | Voice / Data   | 1 850.7 MHz ~ 1 909.3 MHz   |
| LTE Band 4 (AWS)                       | Voice / Data   | 1 710.7 MHz ~ 1 754.3 MHz   |
| LTE Band 5 (Cell)                      | Voice / Data   | 824.7 MHz ~ 848.3 MHz       |
| LTE Band 7                             | Voice / Data   | 2 502.5 MHz ~ 2 567.5 MHz   |
| LTE Band 12                            | Voice / Data   | 699.7 MHz ~ 715.3 MHz       |
| LTE Band 13                            | Voice / Data   | 779.5 MHz ~ 784.5 MHz       |
| LTE Band 14                            | Voice / Data   | 790.5 MHz ~ 795.5 MHz       |
| LTE Band 25                            | Voice / Data   | 1 850.7 MHz ~ 1 914.3 MHz   |
| LTE Band 26                            | Voice / Data   | 814.7 MHz ~ 848.3 MHz       |
| LTE Band 30                            | Voice / Data   | 2 307.5 MHz ~ 2 312.5 MHz   |
| LTE TDD Band 38                        | Voice / Data   | 2 572.5 MHz ~ 2 617.5 MHz   |
| LTE TDD Band 40                        | Voice / Data   | 2 302.5 MHz ~ 2 397.5 MHz   |
| LTE TDD Band 41                        | Voice / Data   | 2 498.5 MHz ~ 2 687.5 MHz   |
| LTE TDD Band 48                        | Voice / Data   | 3 552.5 MHz ~ 3 697.5 MHz   |
| LTE Band 66 (AWS)                      | Voice / Data   | 1 710.7 MHz ~ 1 779.3 MHz   |
| LTE Band 71                            | Voice / Data   | 665.5 MHz ~ 695.5 MHz       |
| NR Band n2 (PCS)                       | Data           | 1 852.5 MHz ~ 1 907.5 MHz   |
| NR Band n5 (Cell)                      | Data           | 826.5 MHz ~ 846.5 MHz       |
| NR Band n12                            | Data           | 701.5 MHz ~ 713.5 MHz       |
| NR Band n25                            | Data           | 1852.5 MHz ~ 1912.5 MHz     |
| NR Band n30                            | Data           | 2 307.5 MHz ~ 2 312.5 MHz   |
| NR Band n41                            | Data           | 2 506.02 MHz ~ 2 679.99 MHz |
| NR Band n66                            | Data           | 1 712.5 MHz ~ 1 777.5 MHz   |
| NR Band n71                            | Data           | 665.5 MHz - 695.5 MHz       |
| NR Band n77                            | Data           | 3 710 MHz ~ 3 969.99 MHz    |
| NR Band n260                           | Data           | 37000 - 40000 MHz           |
| NR Band n261                           | Data           | 27500 - 28350 MHz           |
| U-NII-1                                | Voice / Data   | 5 180 MHz ~ 5 240 MHz       |
| U-NII-2A                               | Voice / Data   | 5 260 MHz ~ 5 320 MHz       |
| U-NII-2C                               | Voice / Data   | 5 500 MHz ~ 5 720 MHz       |
| U-NII-3                                | Voice / Data   | 5 745 MHz ~ 5 825 MHz       |
| 2.4 GHz WLAN                           | Voice / Data   | 2 412 MHz ~ 2 462 MHz       |
| Bluetooth / LE 5.0                     | Data           | 2 402 MHz ~ 2 480 MHz       |
| NFC                                    | Data           | 13.56 MHz                   |

## 4. Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.19-2011 Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids and FCC published procedure

KDB 285076 D01 HAC Guidance v05r01

KDB 285076 D03 HAC FAQ v01r04

TCB workshop updates

KDB 285076 D02 T-Coil testing v03r01

## 5. Measuring Instrument Calibraion

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations and is traceable to recognized national standards.

| Name of Equipment            | Manufacturer  | Type/Model | Serial No.   | Cal. Due Date |
|------------------------------|---------------|------------|--------------|---------------|
| ABM Probe                    | SPEAG         | AM1DV3     | 3050         | 11/27/2021    |
| ABM Probe                    | SPEAG         | AM1DV3     | 3049         | 05/26/2021    |
| Data Acquisition Electronics | SPEAG         | DAE4       | 1417         | 02/22/2022    |
| Data Acquisition Electronics | SPEAG         | DAE4       | 1225         | 08/07/2021    |
| DAC                          | Sound Devices | USBPre 2   | HB1318341009 | N/A           |
| Radio Communication Tester   | R & S         | CMW 500    | 167916       | 10/20/2021    |
| Radio Communication Tester   | R & S         | CMW 500    | 127521       | 05/04/2022    |
| Radio Communication Tester   | Anritsu       | MT8821C    | 6262044720   | 12/22/2021    |
| Radio Communication Tester   | Anritsu       | MT8000A    | 6262036812   | 12/22/2021    |



## 6. Measurement Uncertainty

### Measurement Uncertainty for Audio Band Magnetic Measurement

| Error Description   | Uncertainty values (±%) | Probe Dist. | Div. | C <sub>i</sub> ABM1 | C <sub>i</sub> ABM2 | Std. Unc.  |             |
|---|-------------------------|-------------|------|---------------------|---------------------|------------|-------------|
|   |                         |             |      |                     |                     | ABM1 (±%)  | ABM2 (±%)   |
| <b>Probe Sensitivity</b>  |                         |             |      |                     |                     |            |             |
| ReFereNce Level   | 3.00                    | N           | 1    | 1                   | 1                   | 3.00       | 3.00        |
| AMCC Geometry   | 0.40                    | R           | 1.73 | 1                   | 1                   | 0.23       | 0.23        |
| AMCC Current  | 1.00                    | R           | 1.73 | 1                   | 1                   | 0.58       | 0.58        |
| Porbe Positioning during Calibr.  | 0.10                    | R           | 1.73 | 1                   | 1                   | 0.06       | 0.06        |
| Noise Contribution  | 0.70                    | R           | 1.73 | 0.0143              | 1                   | 0.01       | 0.40        |
| Frequency Slope   | 5.90                    | R           | 1.73 | 0.1                 | 1                   | 0.34       | 3.41        |
| <b>Probe System</b>   |                         |             |      |                     |                     |            |             |
| Repeatability / Drift   | 1.00                    | R           | 1.73 | 1                   | 1                   | 0.58       | 0.58        |
| Linearity / Dynamic Range   | 0.60                    | R           | 1.73 | 1                   | 1                   | 0.35       | 0.35        |
| Acoustic Noise  | 1.00                    | R           | 1.73 | 0.1                 | 1                   | 0.06       | 0.58        |
| Probe Angle   | 2.30                    | R           | 1.73 | 1                   | 1                   | 1.33       | 1.33        |
| Spectral Processing   | 0.90                    | R           | 1.73 | 1                   | 1                   | 0.52       | 0.52        |
| Integration Time  | 0.60                    | N           | 1.00 | 1                   | 5                   | 0.60       | 3.00        |
| Field Disturbation  | 0.20                    | R           | 1.73 | 1                   | 1                   | 0.12       | 0.12        |
| <b>Test Signal</b>  |                         |             |      |                     |                     |            |             |
| Ref. Signal Spectral Response   | 0.60                    | R           | 1.73 | 0                   | 1                   | 0.00       | 0.35        |
| <b>Positioning</b>  |                         |             |      |                     |                     |            |             |
| Probe Positioning   | 1.90                    | R           | 1.73 | 1                   | 1                   | 1.10       | 1.10        |
| Phantom Thickness   | 0.90                    | R           | 1.73 | 1                   | 1                   | 0.52       | 0.52        |
| DUT Positioning   | 1.90                    | R           | 1.73 | 1                   | 1                   | 1.10       | 1.10        |
| <b>External Contributions</b>   |                         |             |      |                     |                     |            |             |
| RF Interference   | 0.00                    | R           | 1.73 | 1                   | 0.3                 | 0.00       | 0.00        |
| Test Signal Variation   | 2.00                    | R           | 1.73 | 1                   | 1                   | 1.2        | 1.2         |
| <b>Combined Std. Uncertainty (ABM field)</b>  |                         |             |      |                     |                     | <b>4.1</b> | <b>6.1</b>  |
| <b>Expanded Std. Uncertainty (%)</b>  |                         |             |      |                     |                     | <b>8.1</b> | <b>12.3</b> |
| Notes for table<br>N - Nomal<br>R - Rectangular<br>Div. - Divisor used to obtain standard uncertainty |                         |             |      |                     |                     |            |             |

## 7. Test Procedures for all Technologies

### 7.1 General Procedures C63.19-2011, Section 7

ANSI C63.19-2011, Section 7

This document describes the procedures used to measure the ABM (T-Coil) performance of the WD.

In addition to measuring the absolute signal levels, the A-weighted magnitude of the unintended signal shall also be determined. In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal must be made at the same location for all measurement positions. In addition, the RF field strength at each measurement location must be at or below that required for the assigned category.

Measurements shall not include undesired properties from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load may be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there may still be RF leakage from the WD, which may interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 7.1. If the device display can be turned off during a phone call then that may be done during the measurement as well.

Measurements shall be performed at two locations specified in A.3, with the correct probe orientation for a particular location, in a multistage sequence by first measuring the field intensity of the desired T-Coil signal (ABM1) that is useful to a hearing aid T-Coil. The undesired magnetic components (ABM2) must be measured at the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired ABM signals must be calculated. For the perpendicular field location, only the ABM1 frequency response shall be determined in a third measurement stage. The flow chart in Figure 7.3 illustrates this three-stage, two orientation process.

The following steps summarize the basic test flow for determining ABM1 and ABM2. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of ABM1.

A validation of the test setup and instrumentation may be performed using a TMFS or Helmholtz coil. Measure the emissions and confirm that they are within the specified tolerance.

Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non- radiating load as shown in Figure 7.1 or Figure 7.2. Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in 7.3.1.

The drive level to the WD is set such that the reference input level specified in Table 7.1 is input to the base station simulator (or manufacturer's test mode equivalent) in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at  $f = 1$  kHz. Either a sine wave at 1025 Hz or a voice- like signal, band-limited to the 1 kHz 1/3 octave, as defined in 7.4.2, shall be used for the reference audio signal.

If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used.

The same drive level will be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.

Determine the magnetic measurement locations for the WD device (A.3), if not already specified by the manufacturer, as described in 7.4.4.1.1 and 7.4.4.2.

At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at  $f_i$ ) as described in 7.4.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency ( $f_i$ ) shall be centered in each 1/3 octave band maintaining the same drive level as determined in item c) and the reading taken for that band.

Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input-output comparison using simulated speech.


The full-band integrated or half-band integrated probe output, as specified in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.)

All measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal ON and OFF with the probe measuring the same location. If the scanning method is used the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criteria in 7.3.1.

At the measurement location for each orientation, measure and record the undesired broadband audio magnetic signal (ABM2) as specified in 7.4.4.4 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality).

Obtain the data from the postprocessor, SEMCAD, and determine the category that properly classifies the signal quality based on Table 8.5.

**Test Setup Diagram**

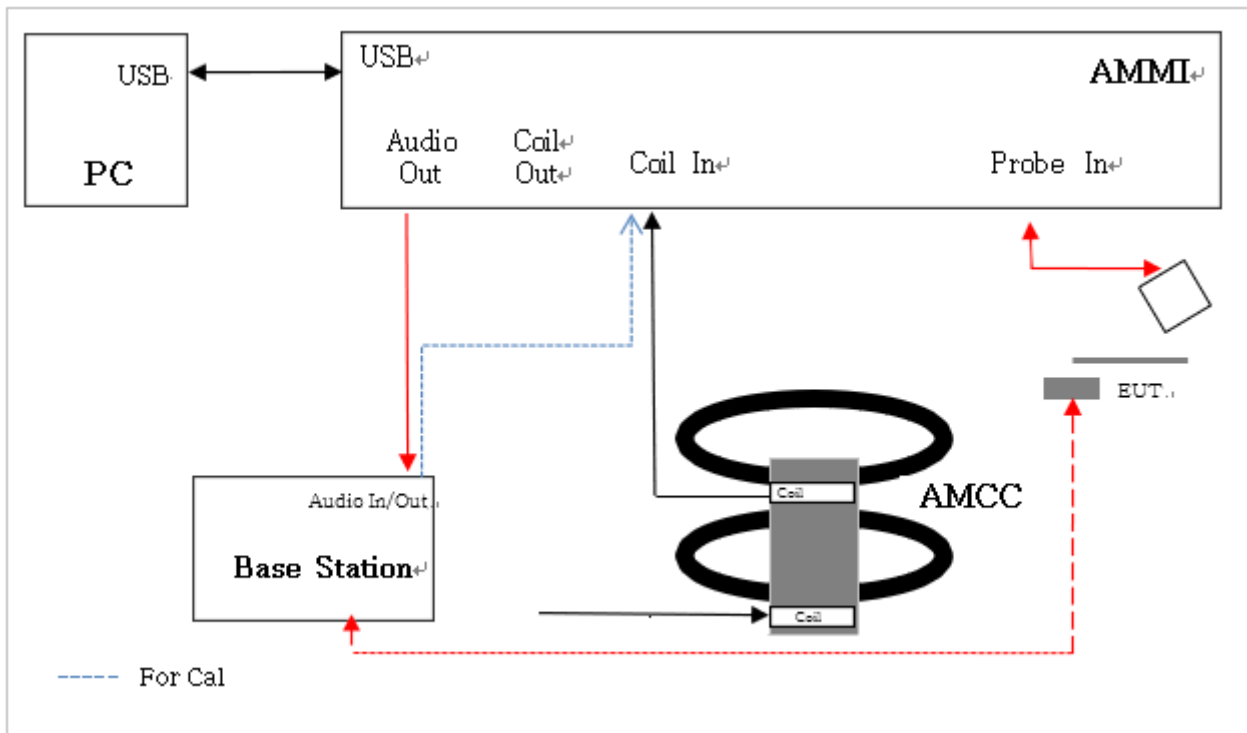

**7.2 VoWiFi – For PAG REUSE**

This device supports Wi-Fi calling (aka Voice over Wi-Fi or VoWiFi) which is an extended feature of the carriers CMRS service to offload VoLTE calls onto local area networks over WI-FI via the internet and subject to HAC assessment for phones with a HAC rating. HAC assessment for this feature is subject to Pre Approval Guidance.

The set up for VoWiFi uses the Base station as described in section 7.1 with the exception that the reference audio level is set at -20dBm0. The reference level is calibrated using the standard call box calibration procedures with the exception of the -20dBm0 reference level being used (refer to section 8.4).


An investigation was performed to determine worst case codec, bit rate and air interface configuration (refer to sections 12.5 and 12.6).

### 7.3 Over the Top(OTT) – For PAG REUSE

This device supports VoIP via a preinstalled application that uses the **Google Duo** service, using **OPUS** as its only codec (refer to §11 for air interface details and §12.7 for codec bit rates). VoIP capabilities require HAC assessment when voice calls are supported over the cellular data connection via pre-installed VoIP applications and the assessment is subject to Pre-Approval Guidance procedures.


The equipment is set up as shown below with a support device used to originate the call using the IP transport. The support device connects to the cloud-based **Google Duo** service via Wi-Fi access point and router, or RJ45. The DUT connects to the VoIP service via a cellular/unlicensed air interface to the call box and an Ethernet connection from call box to Internet. The various codec bit rate and air interface configurations are evaluated to determine the worst-case configuration (refer to §12.7).

#### Test Setup configuration for OTT calls

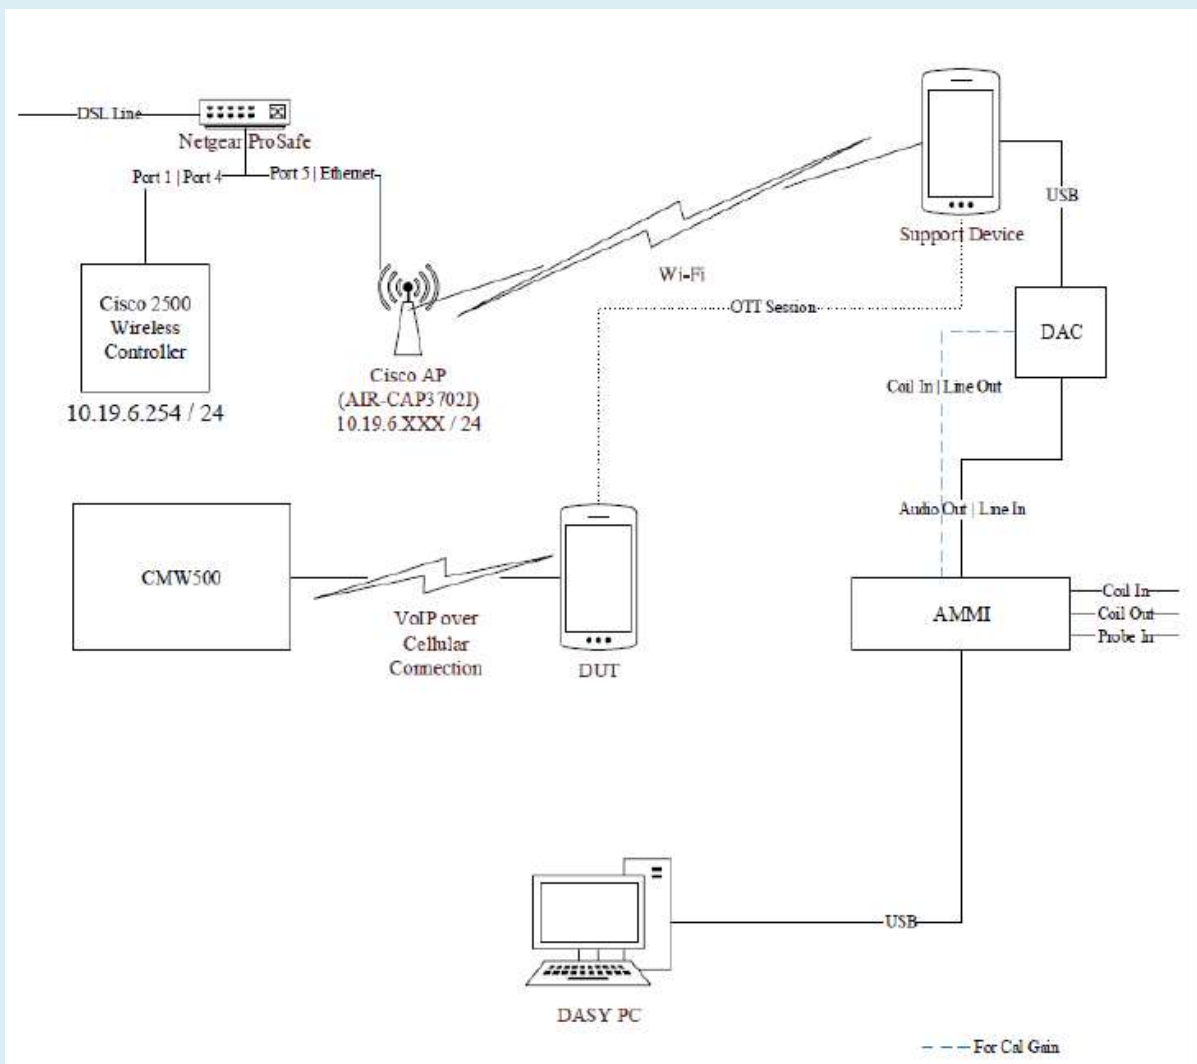

For the OTT call, the calibrated audio card within the CMW500 cannot be used so the AMMI is connected to an external Digital-Analog Converter (DAC) and the DAC is connected to the Support Device via USB. The test signal is sent from the DASY PC to the AMMI, from the AMMI to the DAC, from the DAC to the Support Device, and, via the VoIP call, to the DUT.

As this test set up uses an external DAC between the AMMI's audio output and support device, the appropriate gain factor for the OTT call needs be determined. This is done by connecting the DAC between the AMMI Audio output and Coil input as shown below.

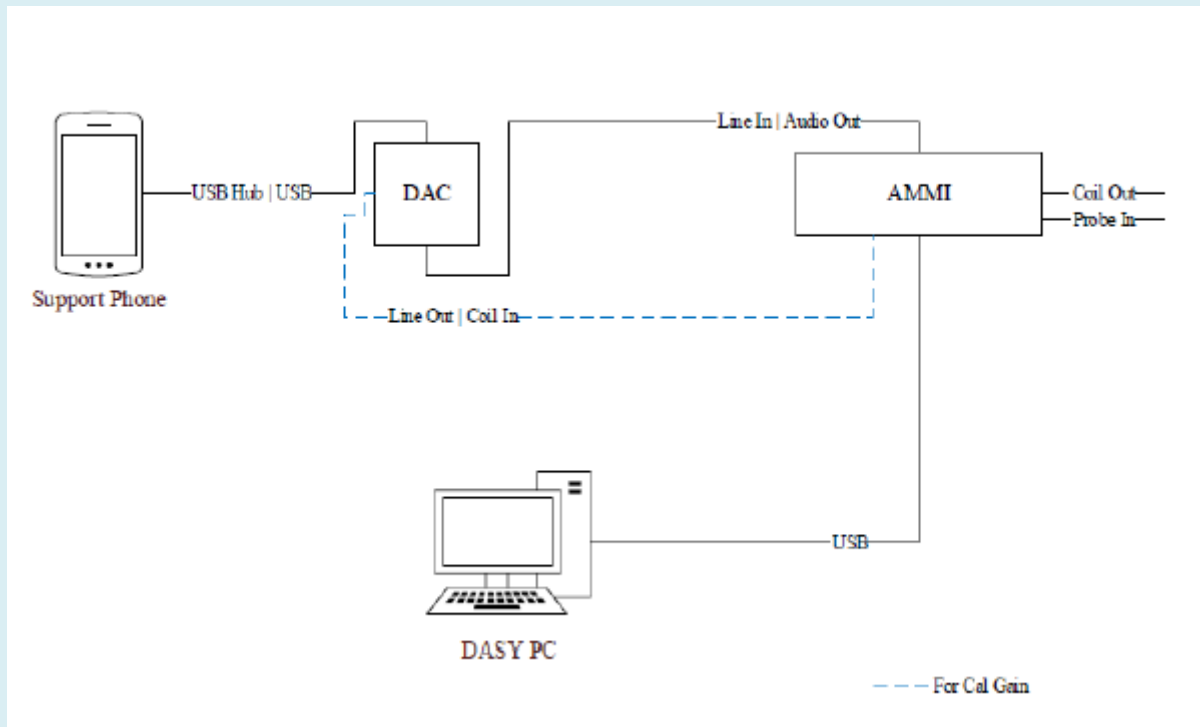

Using the metering function on the DAC, the DAC gain is adjusted until the volume reaches 0 dBFS (3.14 dBm0 based on TIA/EIA 810-A). SPEAG's "TN-LK-05042018-C-T-Coil\_Levels" document (Appendix E) steps E through H are then followed to determine the adjusted gain values as detailed in §8.5 so that the reference level is set to 23.14dB below full scale, i.e. at -20dBm0. A verification of the DAC's output is performed prior to testing.

## 8. Audio Level and Gain Measurements

### 8.1 GSM

Refer to the below table for the gains used to measure GSM.

| Signal Type       | Audio Level<br>[dBm] | Gain<br>[dB] | Gain<br>[linear] |
|-------------------|----------------------|--------------|------------------|
| Voice 1 kHz       | -16                  | 27.94        | 24.93            |
| Voice 300 - 3 kHz | -19                  | 34.65        | 53.58            |

### 8.2 W-CDMA

Refer to the below table for the gains used to measure W-CDMA.

| Signal Type       | Audio Level<br>[dBm] | Gain<br>[dB] | Gain<br>[linear] |
|-------------------|----------------------|--------------|------------------|
| Voice 1 kHz       | -16                  | 27.96        | 24.96            |
| Voice 300 - 3 kHz | -19                  | 34.67        | 53.6             |

### 8.3 CDMA

Refer to the below table for the gains used to measure GSM.

| Signal Type       | Audio Level<br>[dBm] | Gain<br>[dB] | Gain<br>[linear] |
|-------------------|----------------------|--------------|------------------|
| Voice 1 kHz       | -18                  | 25.86        | 19.60            |
| Voice 300 - 3 kHz | -19                  | 34.57        | 53.07            |

### 8.4 VOLTE

Refer to the below table for the gains used to measure VoLTE.

The following software/firmware was used to simulate the VoLTE server for testing:

| Firmware          | License Keys                              | Software Name   |
|-------------------|---|---|
| V3.7.30 for LTE   | KS500<br>KS550                            | LTE FDD R8 SIG BASIC<br>LTE TDD R8 SIG BASIC  |
| V3.7.20 for Audio | KA100<br>KA150<br>KAA20<br>KM050<br>KS104 | IP APPL ENABLING IPv4<br>IP APPL ENABLING IPv6<br>IP APPL IMS BASIC<br>DATA APPL MEAS<br>EVS SPEECH CODEC |

#### FDD

| Signal Type       | Audio Level<br>[dBm] | Gain<br>[dB] | Gain<br>[linear] |
|-------------------|----------------------|--------------|------------------|
| Voice 1 kHz       | -16                  | 27.94        | 24.93            |
| Voice 300 - 3 kHz | -19                  | 34.65        | 53.58            |

#### TDD

| Signal Type       | Audio Level<br>[dBm] | Gain<br>[dB] | Gain<br>[linear] |
|-------------------|----------------------|--------------|------------------|
| Voice 1 kHz       | -16                  | 27.91        | 24.80            |
| Voice 300 - 3 kHz | -19                  | 34.62        | 53.29            |

## 8.5 VoWi-Fi

Refer to the below table for the gains used to measure VoWi-Fi.

| Firmware          | License Keys | Software Name         |
|-------------------|--------------|-----------------------|
| V3.7.40 for WLAN  | KS650        | WLAN A/B/G SIG BASIC  |
|                   | KS651        | WLAN N SIG BASIC      |
|                   | KS656        | WLAN IEEE 802.11ac    |
|                   | KS657        | WLAN IEEE 802.11ax    |
| V3.7.20 for Audio | KA100        | IP APPL ENABLING IPv4 |
|                   | KA150        | IP APPL ENABLING IPv4 |
|                   | KAA20        | IP APPL IMS BASIC     |
|                   | KM050        | DATA APPL MEAS        |
|                   | KS104        | EVS SPEECH CODEC      |
|                   |              |                       |

| Signal Type       | Audio Level<br>[dBm] | Gain<br>[dB] | Gain<br>[linear] |
|-------------------|----------------------|--------------|------------------|
| Voice 1 kHz       | -20                  | 23.88        | 15.58            |
| Voice 300 - 3 kHz | -20                  | 33.59        | 47.36            |

## 8.6 Over the Top(OTT) – For PAG REUSE

For EDGE, HSPA, LTE and Wi-Fi the linear gain levels listed below were used. The results below are based on a reference input level of -20 dBm.

To calibrate the DAC (refer §7.3), three. Way audio files (sine wave, 1kHz voice, and 300 to 3 kHz voice) are sent from the DASY5 PC to the AMMI, then to the DAC. The Helmholtz resonator measures the field strength, which represents the AMMI to DAC input sensitivity. After determining the input sensitivity, the adjusted linear gain values can then be calculated.


| Signal Type     | Audio Level<br>[dBm] | Gain<br>[dB] | Gain<br>[linear] |
|-----------------|----------------------|--------------|------------------|
| Voice 1 kHz     | -20                  | 25.75        | 19.32            |
| Voice 300-3 kHz | -20                  | 35.46        | 58.8             |

## 9 T-coil Measurement Criteria

### 9.1 Frequency Responses


The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve, over the frequency range 300 Hz to 3000 Hz.

Figure 8.1 and Figure 8.2 provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been **corrected from the raw readings.**

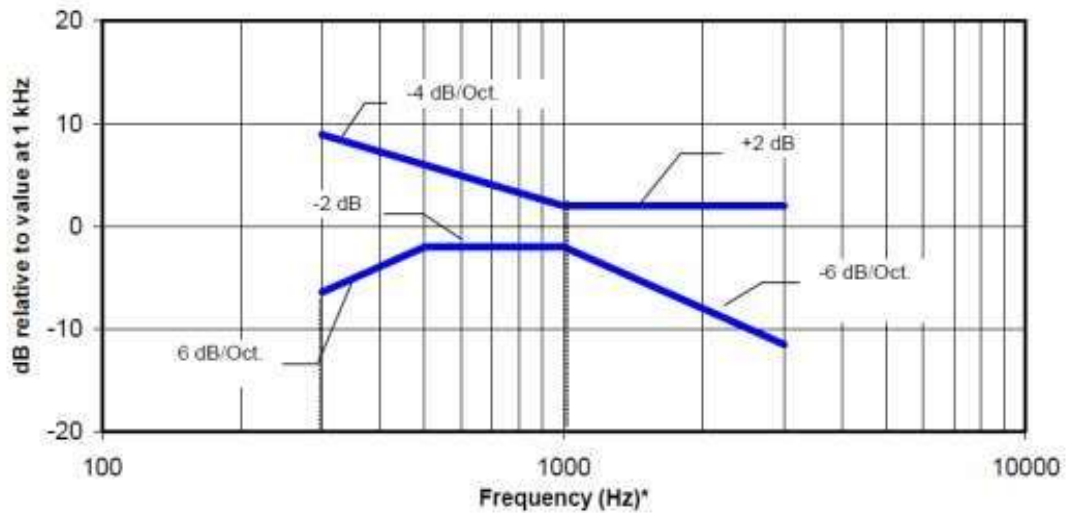

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Figure 8.1—Magnetic field frequency response for WDs with field strength  $\leq -15$  dB (A/m) at 1 kHz**

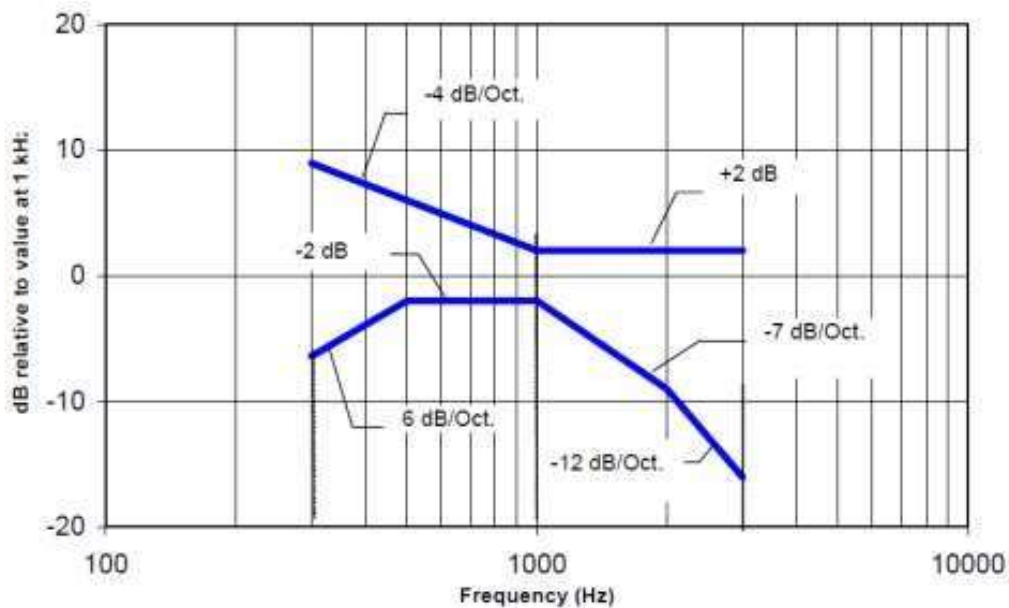

NOTE—The frequency response is between 300 Hz and 3000 Hz.

**Figure 8.2—Magnetic field frequency response for WDs with a field that exceeds  $-15$  dB(A/m) at 1 kHz**



**9.2 Signal to Noise**


This specifies the signal-to-noise quality requirement for the intended T-Coil signal from a WD. The worst signal to noise of the two T-Coil signal measurements, as determined in Clause 7, shall be used to determine the T-Coil mode category per Table 8.5.

Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criterion that can be measured is the RF immunity in T-Coil Mode. This is measured using the same procedure as for the audio coupling mode and at the same levels as specified in 6.4.

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

Table 8.5- T-Coil signal-to-noise categories

Measurement locations and reference plane to be used for the T-coil measurements.

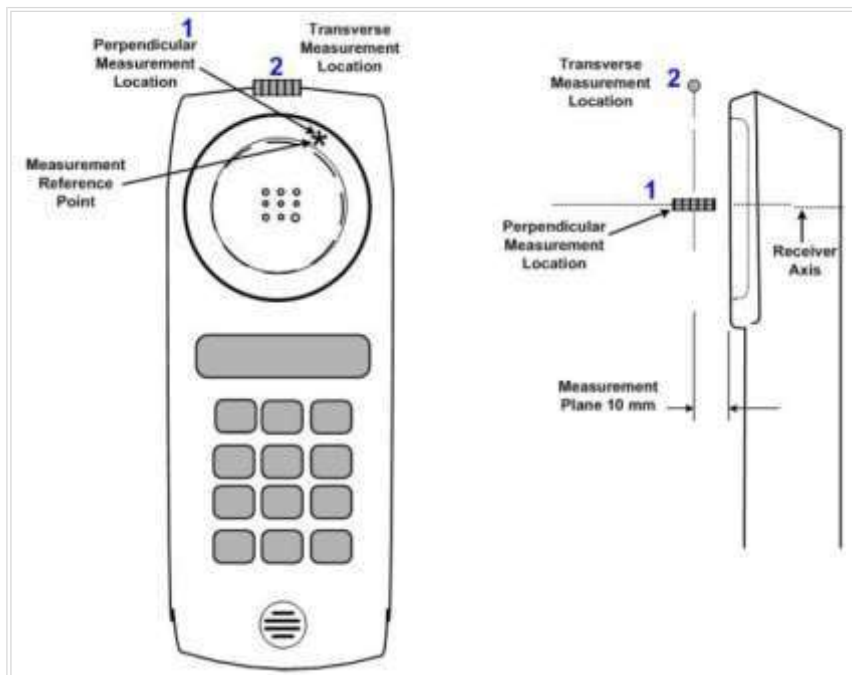

## 10. Device Under Test

|                                |                                 |             |
|--------------------------------|---------------------------------|-------------|
| <b>Normal operation</b>        | Held to head                    |             |
| <b>Back Cover</b>              | The Back Cover is not removable |             |
| <b>Test sample information</b> | S/N                             | Notes       |
|                                | UDG0121M                        | T-coil Test |
|                                | UDG0114M                        | T-coil Test |
|                                | UDG0229M                        | T-coil Test |

## 11. Air Interfaces and Operating Mode

| Air Interface   | Bands (MHz)     | Type | C63.19 Tested      | Simultaneous Transmitter   | Audio Codecs Evaluated                              |
|---|-----------------|------|--------------------|--|---|
| GSM   | 850             | VO   | Yes                | Wi-Fi, BT  | EFR   |
|   | 1900            |      |                    |  |   |
|   | GPRS/EDGE       | VD   | Yes <sup>3</sup>   | Wi-Fi, BT  | OPUS <sup>2</sup>                                   |
| W-CDMA (UMTS)   | 850             | VO   | Yes                | Wi-Fi, BT  | AMR-NB & AMR-WB                                     |
|   | 1700            |      |                    |  |   |
|   | 1900            |      |                    |  |   |
|   | HSPA            | VD   | Yes <sup>3</sup>   | Wi-Fi, BT  | OPUS <sup>2</sup>                                   |
| CDMA  | 800             | VO   | Yes                | Wi-Fi, BT  | EVRC-B & 8k-EVRC                                    |
|   | 850             | VO   | Yes                | Wi-Fi, BT  |   |
|   | 1900            | VO   | Yes                | Wi-Fi, BT  |   |
|   | 1xEVDO          | VD   | Yes <sup>3</sup>   | Wi-Fi, BT  | OPUS <sup>2</sup>                                   |
| LTE - FDD   | 680(B71)        | VD   | Yes <sup>1,3</sup> | Wi-Fi, BT  | AMR-NB, AMR- WB, EVS-NB, EVS-WB & OPUS <sup>2</sup> |
|   | 700 (B12/13/14) |      |                    |  |   |
|   | 850 (B5/26)     |      |                    |  |   |
|   | 1700 (B4/66)    |      |                    |  |   |
|   | 1900 (B2/25)    |      |                    |  |   |
|   | 2300 (B30)      |      |                    |  |   |
|   | 2500 (B7)       |      |                    |  |   |
| LTE – TDD   | 2600 (B41)      | VD   | Yes <sup>1,3</sup> | Wi-Fi, BT  | AMR-NB, AMR- WB, EVS-NB, EVS-WB & OPUS <sup>2</sup> |
|   | 3600 (B48)      |      |                    |  |   |
|   | 2600 (B38)      |      |                    |  |   |
|   | 2300 (B40)      |      |                    |  |   |
| NR -FDD   | 700(B12)        | VD   | Yes <sup>4</sup>   | Wi-Fi, BT  | OPUS <sup>2</sup>                                   |
|   | 680(B71)        |      |                    |  |   |
|   | 850(B5)         |      |                    |  |   |
|   | 1700(B66)       |      |                    |  |   |
|   | 1900(B2, B25)   |      |                    |  |   |
|   | 2300(B30)       |      |                    |  |   |
| NR -TDD   | 2600(B41)       | VD   | Yes <sup>4</sup>   | Wi-Fi, BT  | OPUS <sup>2</sup>                                   |
|   | 3800(B77)       |      | Yes <sup>4</sup>   |  |   |
|   | 28000 (n261)    |      | No <sup>5</sup>    |  |   |
|   | 39000 (n260)    |      | No <sup>5</sup>    |  |   |
| Wi-Fi   | 2450            | VD   | Yes <sup>3</sup>   | WWAN, Wifi 5GHz  | AMR-NB, AMR- WB, EVS-NB, EVS-WB & OPUS <sup>2</sup> |
|   | 5200 (U-NII-1)  |      |                    | WWAN and BT  |   |
|   | 5300 (U-NII-2A) |      |                    |  |   |
|   | 5500 (U-NII-2C) |      |                    |  |   |
|   | 5800 (U-NII-3)  |      |                    |  |   |
| BT  | 2450            | DT   | NA                 | WWAN and Wifi 5GHz   | N/A   |
| Type:<br>VO: Legacy Cellular Voice Service<br>DT: Digital Transport only (no voice)<br>CMRS: Commercial Mobile Radio Service<br>VD: IP Voice service over Digital Transport |                 |      |                    | Note:<br>1. Ref Lev in accordance with the July 2012 VoLTE interpretation<br>2. Ref Lev -20 dBm0<br>3. For PAG REUSE<br>4. NR was evaluated using an interim procedure outlined section 12.9.1<br>5. n260,n261 are currently outside the scope of ANSI C63.19 and FCC HAC regulations.<br>This DUT dose not support VOMmWave for n260,n261 |   |

## 12. HAC (T-coil) Test Results

### 12.1 Codec Investigation

An investigation between the various codec configurations (Low/High bit rates for Narrowband, Wideband) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed on one band of each CDMA, GSM, W-CDMA, LTE FDD/TDD.

The highlighted results below were determined to be the worst case codec configuration(s) for CDMA,GSM, W- CDMA and LTE.

| Codec Investigation |                 |         |                 |                          |
|---------------------|-----------------|---------|-----------------|--------------------------|
| Codec State         | AMR-NB (kbit/s) |         | Orientation     | Band/ Channel            |
|                     | EVRC-B          | 8k-EVRC |                 |                          |
| ABM1 (dB/m)         | 2.68            | 0.39    | z (Axial)       | CDMA/EVDO BC0<br>CH. 384 |
| ABM2 (dBA/m)        | -44.84          | -50.33  |                 |                          |
| S+N/N (dB)          | 47.52           | 50.73   |                 |                          |
| Freq. Resposne (dB) | 1.60            | 1.76    |                 |                          |
| ABM1 (dB/m)         | -7.82           | -4.47   | y (Transversal) |                          |
| ABM2 (dBA/m)        | -51.61          | -48.59  |                 |                          |
| S+N/N (dB)          | <b>43.79</b>    | 44.12   |                 |                          |

| Codec Investigation |                 |        |                 |                   |
|---------------------|-----------------|--------|-----------------|-------------------|
| Codec State         | AMR-NB (kbit/s) |        | Orientation     | Band/ Channel     |
|                     | FR V1           | HR V1  |                 |                   |
| ABM1 (dB/m)         | 1.87            | 2.36   | z (Axial)       | GSM 850<br>CH.190 |
| ABM2 (dBA/m)        | -32.23          | -32.97 |                 |                   |
| S+N/N (dB)          | 34.09           | 35.33  |                 |                   |
| Freq. Resposne (dB) | 1.51            | 2.00   |                 |                   |
| ABM1 (dB/m)         | -3.74           | -3.32  | y (Transversal) |                   |
| ABM2 (dBA/m)        | -33.83          | -35.32 |                 |                   |
| S+N/N (dB)          | <b>30.09</b>    | 32.00  |                 |                   |

| Codec Investigation |                 |        |        |                 |        |        |                 |                                    |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|-----------------|------------------------------------|
| Codec State         | AMR-NB (kbit/s) |        |        | AMR-WB (kbit/s) |        |        | Orientation     | Band/ Bandwidth/<br>Channel        |
|                     | 4.75            | 7.4    | 12.2   | 6.6             | 15.85  | 23.85  |                 |                                    |
| ABM1 (dB/m)         | 7.00            | -5.02  | 2.79   | 0.18            | 6.74   | 0.69   | z (Axial)       | WCDMA<br>Band II Rel.99<br>CH.9400 |
| ABM2 (dBA/m)        | -26.72          | -38.56 | -30.42 | -31.32          | -24.89 | -32.63 |                 |                                    |
| S+N/N (dB)          | 33.72           | 33.54  | 33.21  | 31.51           | 31.63  | 33.32  |                 |                                    |
| Freq. Resposne (dB) | 1.33            | 1.68   | 1.54   | 1.46            | 1.35   | 1.66   |                 |                                    |
| ABM1 (dB/m)         | -4.69           | -3.81  | -3.74  | 2.30            | 4.69   | -5.52  | y (Transversal) |                                    |
| ABM2 (dBA/m)        | -38.31          | -37.32 | -36.88 | -29.19          | -26.87 | -38.64 |                 |                                    |
| S+N/N (dB)          | 33.62           | 33.51  | 33.14  | <b>31.50</b>    | 31.56  | 33.12  |                 |                                    |

| Codec Investigation |                 |        |        |                 |        |        |                 |  |  |  |  |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|-----------------|--|--|--|--|
| Codec State         | AMR-NB (kbit/s) |        |        | AMR-WB (kbit/s) |        |        | Orientation     | Band/ Bandwidth/ Channel                                 |  |  |  |
|                     | 4.75            | 7.4    | 12.2   | 6.6             | 15.85  | 23.85  |                 |  |  |  |  |
| ABM1 (dB/m)         | 6.25            | 3.45   | 3.70   | 9.97            | 11.87  | 11.91  | z (Axial)       | LTE Band 25<br>CH.26365<br>20 Mhz BW<br>QPSK 1RB 0offset |  |  |  |
| ABM2 (dBA/m)        | -30.95          | -33.75 | -33.01 | -49.49          | -49.69 | -49.82 |                 |  |  |  |  |
| S+N/N (dB)          | 37.19           | 37.20  | 36.71  | 59.46           | 61.56  | 61.73  |                 |  |  |  |  |
| Freq. Resposne(dB)  | 1.49            | 1.48   | 1.45   | 1.05            | 1.15   | 1.19   |                 |  |  |  |  |
| ABM1 (dB/m)         | -4.59           | -1.56  | -0.84  | 0.86            | 1.90   | 1.98   | y (Transversal) |  |  | LTE Band 25<br>CH.26365<br>20 Mhz BW<br>QPSK 1RB 0offset |  |
| ABM2 (dBA/m)        | -41.70          | -38.60 | -37.34 | -52.89          | -52.67 | -52.89 |                 |  |  |  |  |
| S+N/N (dB)          | 37.11           | 37.04  | 36.50  | 53.74           | 54.57  | 54.87  |                 |  |  |  |  |

| Codec Investigation |                 |        |        |                 |        |        |                  |        |        |                 |   |  |   |  |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|------------------|--------|--------|-----------------|---|--|---|--|
| Codec State         | EVS-NB (kbit/s) |        |        | EVS-WB (kbit/s) |        |        | EVS-SWB (kbit/s) |        |        | Orientation     | Band/ BandWidth/ Channel                                    |  |   |  |
|                     | 5.9             | 13.2   | 24.4   | 5.9             | 24.4   | 128    | 9.6              | 24.4   | 128    |                 |   |  |   |  |
| ABM1 (dB/m)         | 2.87            | 4.52   | 4.47   | 9.23            | 1.56   | 4.66   | 0.30             | 3.00   | 0.64   | z (Axial))      | LTE Band 25<br>CH.26365<br>20 Mhz BW<br>QPSK 1RB<br>0offset |  |   |  |
| ABM2 (dBA/m)        | -33.66          | -31.92 | -31.96 | -24.96          | -34.09 | -30.32 | -34.73           | -32.11 | -33.98 |                 |   |  |   |  |
| S+N/N (dB)          | 36.53           | 36.44  | 36.43  | 34.19           | 35.65  | 34.98  | 35.03            | 35.11  | 34.62  |                 |   |  |   |  |
| Freq.Resposne(dB)   | 1.67            | 1.61   | 1.57   | 1.48            | 1.48   | 1.43   | 1.16             | 1.20   | 1.23   |                 |   |  |   |  |
| ABM1 (dB/m)         | -9.23           | -2.10  | -0.84  | -0.08           | 1.16   | 3.39   | -3.27            | -2.23  | -6.58  | y (Transversal) |   |  | LTE Band 25<br>CH.26365<br>20 Mhz BW<br>QPSK 1RB<br>0offset |  |
| ABM2 (dBA/m)        | -45.46          | -38.38 | -37.21 | -34.16          | -34.44 | -31.48 | -38.31           | -37.15 | -40.95 |                 |   |  |   |  |
| S+N/N (dB)          | 36.23           | 36.28  | 36.37  | <b>34.08</b>    | 35.60  | 34.88  | 35.04            | 34.92  | 34.37  |                 |   |  |   |  |

| Codec Investigation |                 |        |        |                 |        |        |                 |  |  |  |  |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|-----------------|--|--|--|--|
| Codec State         | AMR-NB (kbit/s) |        |        | AMR-WB (kbit/s) |        |        | Orientation     | Band/ Bandwidth/ Channel                                 |  |  |  |
|                     | 4.75            | 7.4    | 12.2   | 6.6             | 15.85  | 23.85  |                 |  |  |  |  |
| ABM1 (dB/m)         | 1.59            | 2.22   | 2.39   | 7.29            | 8.23   | 9.53   | z (Axial)       | LTE Band 41<br>CH.40620<br>20 Mhz BW<br>QPSK 1RB 0offset |  |  |  |
| ABM2 (dBA/m)        | -31.02          | -30.20 | -29.72 | -23.29          | -22.81 | -21.46 |                 |  |  |  |  |
| S+N/N (dB)          | 32.61           | 32.42  | 32.11  | 30.58           | 31.04  | 30.99  |                 |  |  |  |  |
| Freq. Resposne(dB)  | 1.34            | 1.34   | 1.20   | 1.88            | 1.41   | 1.38   |                 |  |  |  |  |
| ABM1 (dB/m)         | -1.57           | -1.39  | -0.99  | 3.73            | 4.61   | 4.70   | y (Transversal) |  |  | LTE Band 41<br>CH.40620<br>20 Mhz BW<br>QPSK 1RB 0offset |  |
| ABM2 (dBA/m)        | -33.55          | -33.46 | -32.95 | -26.67          | -26.46 | -26.27 |                 |  |  |  |  |
| S+N/N (dB)          | 31.98           | 32.07  | 31.96  | 30.40           | 31.07  | 30.97  |                 |  |  |  |  |

| Codec Investigation |                 |        |        |                 |        |        |                  |        |        |                 |   |  |   |  |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|------------------|--------|--------|-----------------|---|--|---|--|
| Codec State         | EVS-NB (kbit/s) |        |        | EVS-WB (kbit/s) |        |        | EVS-SWB (kbit/s) |        |        | Orientation     | Band/ BandWidth/ Channel                                    |  |   |  |
|                     | 5.9             | 13.2   | 24.4   | 5.9             | 24.4   | 128    | 9.6              | 24.4   | 128    |                 |   |  |   |  |
| ABM1 (dB/m)         | -0.75           | 3.81   | 3.81   | -0.56           | 8.51   | 8.60   | 2.90             | 3.92   | 3.03   | z (Axial))      | LTE Band 41<br>CH.40620<br>20 Mhz BW<br>QPSK 1RB<br>0offset |  |   |  |
| ABM2 (dBA/m)        | -28.49          | -27.21 | -28.14 | -28.35          | -22.84 | -22.26 | -28.15           | -26.65 | -26.94 |                 |   |  |   |  |
| S+N/N (dB)          | 27.74           | 31.02  | 31.95  | 27.79           | 31.34  | 30.86  | 31.05            | 30.57  | 29.98  |                 |   |  |   |  |
| Freq.Resposne(dB)   | 1.41            | 1.48   | 1.55   | 1.69            | 1.42   | 1.38   | 1.10             | 1.24   | 1.25   |                 |   |  |   |  |
| ABM1 (dB/m)         | -3.89           | -1.03  | -0.96  | -12.73          | 2.81   | 5.01   | 0.22             | 0.43   | 0.45   | y (Transversal) |   |  | LTE Band 41<br>CH.40620<br>20 Mhz BW<br>QPSK 1RB<br>0offset |  |
| ABM2 (dBA/m)        | -34.20          | -31.81 | -32.66 | -37.54          | -28.42 | -25.66 | -30.04           | -29.81 | -29.29 |                 |   |  |   |  |
| S+N/N (dB)          | 30.31           | 30.78  | 31.70  | <b>24.81</b>    | 31.23  | 30.67  | 30.26            | 30.24  | 29.74  |                 |   |  |   |  |

## 12.2 TDD Configuration

### LTE TDD Uplink-Downlink Configuration Investigation for VoLTE over IMS

An investigation was performed to determine the worst-case Uplink-Downlink configuration for VoLTE over IMS T-Coil testing. The effects of UL-DL configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length  $T_f = 307200 \cdot T_s = 10$  ms, where  $T_s$  is a number of time units equal to  $1/(15000 \times 2048)$  seconds. Additionally, each radio frame consists of 10 subframes, each of length  $30720 \cdot T_s = 1$  ms, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is  $2192 \cdot T_s$  which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

Uplink-Downlink Configurations for Type 2 Frame Structures

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number |   |   |   |   |   |   |   |   |   | Calculated Transmission Duty Cycle (%) |
|-------------------------------|---|-----------------|---|---|---|---|---|---|---|---|---|--|
|                               |   | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |  |
| 0                             | 5 ms  | D               | S | U | U | U | D | S | U | U | U | 61.4%                                  |
| 1                             | 5 ms  | D               | S | U | U | D | D | S | U | U | D | 41.4%                                  |
| 2                             | 5 ms  | D               | S | U | D | D | D | S | U | D | D | 21.4%                                  |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D | 30.7%                                  |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D | 20.7%                                  |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D | 10.7%                                  |
| 6                             | 5 ms  | D               | S | U | U | U | D | S | U | U | D | 51.4%                                  |

### Power Class 3 Uplink-Downlink Configuration Investigation

VoLTE over IMS was evaluated with the following radio configuration → channel 40620, 20MHz BW, QPSK, 1RB, 0Offset. all configurations (0-6) are supported. The configuration which resulted in the worst z (Axial), y(Transversal) SNR was used for full testing. Uplink-Downlink configuration 0 was used as the worst-case configuration for VoLTE over IMS T-Coil testing. See table below for the SNR comparison between each Uplink-Downlink configuration:

VoLTE over IMS SNNR by UL-DL Configuration

| Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | UL-DL Configuration | ABM1 [dB(A/m)] | ABM2 [dB(A/m)] | Orientation        | Freq. Response (dB) | SNR [dB]     |
|-----------------|---------|-----------------|------------|---------|-----------|---------------------|----------------|----------------|--------------------|---------------------|--------------|
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 0                   | -0.56          | -28.35         | z<br>(Axial)       | 1.69                | 27.79        |
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 1                   | 3.29           | -22.78         |                    | 1.55                | 26.07        |
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 2                   | 1.04           | -26.10         |                    | 1.56                | 27.14        |
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 3                   | -0.60          | -27.22         |                    | 1.40                | 26.61        |
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 4                   | -6.19          | -31.34         |                    | 1.40                | 25.15        |
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 5                   | 1.48           | -24.79         |                    | 1.39                | 26.27        |
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 6                   | 3.62           | -25.00         |                    | 1.69                | 28.61        |
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 0                   | -12.73         | -37.54         | y<br>(Transversal) |                     | <b>24.81</b> |
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 1                   | -2.39          | -27.44         |                    |                     | 25.04        |
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 2                   | -0.76          | -27.03         |                    |                     | 26.27        |
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 3                   | -3.29          | -29.56         |                    |                     | 26.28        |
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 4                   | -11.24         | -36.95         |                    |                     | 25.71        |
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 5                   | -2.62          | -31.31         |                    |                     | 28.70        |
| 2593.0          | 40620   | 20              | QPSK       | 100     | 0         | 6                   | 0.36           | -27.91         |                    | 28.27               |              |

Per the investigations above, UL-DL Configuration 0 was used to evaluate VoLTE over IMS

## 12.3 Air Interface Investigation

Use the worst-case codec test and document a limited set of bands/modulations/channels/bandwidth.

Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations.

### GSM / W-CDMA / CDMA (UMTS)

| Mode  | Ch. Freq.             | Orientation    | ABM1 dB (A/m) | ABM2 dB (A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABMSNR (dB)  | T-Rating | Plot No. |
|---|-----------------------|----------------|---------------|---------------|-----------------------|---------------------|--------------|----------|----------|
| GSM 850<br>Voice Coder Speech Codec:<br>FR V1       | CH.190<br>836.6 MHz   | z(Axial)       | 1.87          | -32.23        | -55.61                | 1.51                | 34.09        | T4       | 1/ 2     |
|   |                       | y(Transversal) | -3.74         | -33.83        | -55.73                |                     | 30.09        | T4       | 3        |
| GSM 1900<br>Voice Coder Speech Codec:<br>FR V1      | CH.512<br>1850.2 MHz  | z(Axial)       | 2.12          | -28.25        | -55.61                | 1.65                | 30.37        | T4       |          |
|   |                       | y(Transversal) | -1.11         | -26.76        | -55.73                |                     | 25.65        | T3       |          |
|   | CH.661<br>1880.0 MHz  | z(Axial)       | 2.18          | -28.49        | -55.61                | 1.61                | 30.67        | T4       | 4/ 5     |
|   |                       | y(Transversal) | -1.01         | -25.97        | -55.73                |                     | <b>24.96</b> | T3       | 6        |
| CH.810<br>1909.8 MHz                                | z(Axial)              | 1.41           | -31.14        | -55.61        | 1.55                  | 32.55               | T4           |          |          |
|   | y(Transversal)        | -4.05          | -29.61        | -55.73        |                       | 25.56               | T3           |          |          |
| W-CDMA Band II<br>Voice AMR WB<br>Codec:6.6 kbit/s  | CH.9400<br>1880.0 MHz | z(Axial)       | 0.18          | -31.32        | -55.84                | 1.46                | 31.51        | T4       | 7/ 8     |
|   |                       | y(Transversal) | 2.30          | -29.19        | -55.93                |                     | 31.50        | T4       | 9        |
| W-CDMA Band IV<br>Voice AMR WB<br>Codec: 6.6 kbit/s | CH.1312<br>1712.4 MHz | z(Axial)       | 5.66          | -25.79        | -55.84                | 1.54                | 31.45        | T4       |          |
|   |                       | y(Transversal) | 1.58          | -29.72        | -55.93                |                     | 31.30        | T4       |          |
|   | CH.1412<br>1732.4 MHz | z(Axial)       | 5.01          | -26.46        | -55.84                | 1.48                | 31.47        | T4       | 10/11    |
|   |                       | y(Transversal) | -8.21         | -39.48        | -55.93                |                     | <b>31.27</b> | T4       | 12       |
| CH.1512<br>1752.6 MHz                               | z(Axial)              | 7.18           | -24.38        | -55.84        | 1.90                  | 31.55               | T4           |          |          |
|   | y(Transversal)        | 1.24           | -30.12        | -55.93        |                       | 31.37               | T4           |          |          |
| W-CDMA Band V<br>Voice AMR WB<br>Codec: 6.6 kbit/s  | CH.4183<br>836.6 MHz  | z(Axial)       | 6.18          | -25.16        | -55.84                | 1.65                | 31.34        | T4       | 13/14    |
|   |                       | y(Transversal) | 4.56          | -26.83        | -55.93                |                     | 31.39        | T4       | 15       |
| CDMA BC0<br>EVRC-B 1/1                              | CH. 384<br>836.52 MHz | z(Axial)       | 2.68          | -44.84        | -54.65                | 1.60                | 47.52        | T4       | 16/17    |
|   |                       | y(Transversal) | -7.82         | -51.61        | -55.25                |                     | 43.79        | T4       | 18       |
| CDMA BC1<br>EVRC-B 1/1                              | CH. 600<br>1880 MHz   | z(Axial)       | 0.34          | -45.75        | -54.65                | 1.43                | 46.09        | T4       | 19/20    |
|   |                       | y(Transversal) | -5.85         | -49.19        | -55.25                |                     | 43.34        | T4       | 21       |
| CDMA BC10<br>EVRC-B 1/1                             | CH. 450<br>817.25 MHz | z(Axial)       | 2.82          | -47.86        | -54.65                | 1.57                | 50.68        | T4       |          |
|   |                       | y(Transversal) | -7.88         | -50.63        | -55.25                |                     | 42.74        | T4       |          |
|   | CH. 560<br>820 MHz    | z(Axial)       | 1.35          | -48.70        | -54.65                | 1.52                | 50.05        | T4       |          |
|   |                       | y(Transversal) | -7.93         | -50.31        | -55.25                |                     | 42.39        | T4       |          |
| CH. 670<br>822.75 MHz                               | z(Axial)              | 0.77           | -48.31        | -54.65        | 1.51                  | 49.09               | T4           |          |          |
|   | y(Transversal)        | -7.92          | -49.84        | -55.25        |                       | 41.92               | T4           |          |          |
| CDMA BC10<br>EVRC-B 3/3                             | CH. 670<br>822.75 MHz | z(Axial)       | 1.47          | -48.48        | -54.65                | 1.58                | 49.95        | T4       | 22/23    |
|   |                       | y(Transversal) | -5.57         | -47.36        | -55.25                |                     | <b>41.79</b> | T4       | 24       |
| CDMA BC10<br>EVRC-B 4/3                             | CH. 670<br>822.75 MHz | z(Axial)       | 0.58          | -48.35        | -54.65                | 1.56                | 48.94        | T4       |          |
|   |                       | y(Transversal) | -8.02         | -50.03        | -55.25                |                     | 42.01        | T4       |          |

Air Interface Investigation(Contiued)

LTE-FDD

| Mode:  | Ch. Freq.              | BW      | BW/ Modulation | RB Config.     | Orientation    | ABM1 dB(A/m)   | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |  |
|--|------------------------|---------|----------------|----------------|----------------|----------------|--------------|-----------------------|---------------------|--------------|----------|----------|--|
| LTE Band 25 Voice<br>EVS-WB Codec:<br>5.9 kbit/s | CH.26365<br>1882.5 MHz | 20 MHz  | QPSK           | 1/0            | z(Axial)       | 9.23           | -24.96       | -55.74                | 1.28                | 34.19        | T4       |          |  |
|  |                        |         |                |                | y(Transversal) | -0.08          | -34.16       | -55.89                |                     | 34.08        | T4       |          |  |
|  |                        |         |                | 1/49           | z(Axial)       | 8.92           | -25.49       | -55.74                | 1.59                | 34.41        | T4       |          |  |
|  |                        |         |                |                | y(Transversal) | -0.76          | -33.96       | -55.89                |                     | 33.21        | T4       |          |  |
|  |                        |         |                | 1/99           | z(Axial)       | 3.32           | -31.08       | -55.74                | 1.47                | 34.40        | T4       |          |  |
|  |                        |         |                |                | y(Transversal) | -9.95          | -43.68       | -55.89                |                     | 33.74        | T4       |          |  |
|  |                        |         |                | 50/0           | z(Axial)       | 0.42           | -33.64       | -55.74                | 1.43                | 34.06        | T4       |          |  |
|  |                        |         |                |                | y(Transversal) | 2.78           | -31.56       | -55.89                |                     | 34.34        | T4       |          |  |
|  |                        |         |                | 50/25          | z(Axial)       | 4.18           | -29.53       | -55.74                | 1.51                | 33.71        | T4       |          |  |
|  |                        |         |                |                | y(Transversal) | -0.24          | -33.72       | -55.89                |                     | 33.48        | T4       |          |  |
|  |                        |         |                | 50/49          | z(Axial)       | 7.92           | -25.78       | -55.74                | 1.34                | 33.71        | T4       |          |  |
|  |                        |         |                |                | y(Transversal) | -3.56          | -37.22       | -55.89                |                     | 33.66        | T4       |          |  |
|  |                        |         |                | 100/0          | z(Axial)       | -7.01          | -40.78       | -55.74                | 1.34                | 33.78        | T4       |          |  |
|  |                        |         |                |                | y(Transversal) | -12.31         | -46.32       | -55.89                |                     | 34.00        | T4       |          |  |
|  |                        |         |                | 16QAM          | 1/49           | z(Axial)       | 3.16         | -28.68                | -55.74              | 1.69         | 31.84    | T4       |  |
|  |                        |         |                |                |                | y(Transversal) | -0.99        | -35.05                | -55.89              |              | 34.05    | T4       |  |
|  |                        |         |                | 64QAM          | 1/49           | z(Axial)       | 3.27         | -31.22                | -55.74              | 1.37         | 34.48    | T4       |  |
|  |                        |         |                |                |                | y(Transversal) | -9.21        | -42.52                | -55.89              |              | 33.31    | T4       |  |
|  |                        | 256QAM  | 1/49           | z(Axial)       | 4.53           | -28.63         | -55.74       | 1.40                  | 33.17               | T4           |          |          |  |
|  |                        |         |                | y(Transversal) | 2.97           | -30.80         | -55.89       |                       | 33.77               | T4           |          |          |  |
|  |                        | 15 MHz  | 16QAM          | 1/36           | z(Axial)       | 6.85           | -26.86       | -55.74                | 1.49                | 33.72        | T4       |          |  |
|  |                        |         |                |                | y(Transversal) | 1.66           | -32.29       | -55.89                |                     | 33.95        | T4       |          |  |
|  |                        | 10 MHz  | 16QAM          | 1/24           | z(Axial)       | 9.09           | -24.82       | -55.74                | 1.42                | 33.91        | T4       |          |  |
|  |                        |         |                |                | y(Transversal) | 0.09           | -33.82       | -55.89                |                     | 33.91        | T4       |          |  |
|  |                        | 5 MHz   | 16QAM          | 1/12           | z(Axial)       | -0.26          | -30.63       | -55.74                | 1.71                | 30.37        | T4       | 25/ 26   |  |
|  |                        |         |                |                | y(Transversal) | -2.47          | -32.78       | -55.89                |                     | <b>30.31</b> | T4       | 27       |  |
|  |                        | 3 MHz   | 16QAM          | 1/7            | z(Axial)       | 3.17           | -30.83       | -55.74                | 1.67                | 34.00        | T4       |          |  |
|  |                        |         |                |                | y(Transversal) | -3.57          | -37.58       | -55.89                |                     | 34.01        | T4       |          |  |
|  |                        | 1.4 MHz | 16QAM          | 1/3            | z(Axial)       | 5.62           | -26.84       | -55.74                | 1.45                | 32.46        | T4       |          |  |
|  |                        |         |                |                | y(Transversal) | -2.04          | -36.40       | -55.89                |                     | 34.36        | T4       |          |  |



**Air Interface Investigation(Contiued)**

**LTE-FDD**

| Mode  | Ch. Freq.              | Band width | BW/ Mode | RB Config. | Orientation    | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |
|---|------------------------|------------|----------|------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------|
| LTE Band 7 Voice<br>EVS WB Codec: 5.9 kbit/s  | CH.21100<br>2535 MHz   | 5 MHz      | 16QAM    | 1/12       | z(Axial)       | 1.32         | -31.67       | -55.74                | 1.54                | 32.98        | T4       | 28/ 29   |
|   |                        |            |          |            | y(Transversal) | -0.16        | -34.03       | -55.89                |                     | 33.87        | T4       | 30       |
| LTE Band 12 Voice<br>EVS WB Codec: 5.9 kbit/s | CH.23095<br>707.5 MHz  | 5 MHz      | 16QAM    | 1/12       | z(Axial)       | 8.80         | -25.57       | -55.74                | 1.60                | 34.37        | T4       | 31/ 32   |
|   |                        |            |          |            | y(Transversal) | -0.31        | -34.46       | -55.89                |                     | 34.15        | T4       | 33       |
| LTE Band 13 Voice<br>EVS WB Codec: 5.9 kbit/s | CH.23230<br>782 MHz    | 5 MHz      | 16QAM    | 1/12       | z(Axial)       | 11.40        | -22.80       | -55.74                | 1.33                | 34.21        | T4       | 34/ 35   |
|   |                        |            |          |            | y(Transversal) | -4.29        | -37.96       | -55.89                |                     | 33.67        | T4       | 36       |
| LTE Band 14 Voice<br>EVS WB Codec: 5.9 kbit/s | CH.23330<br>793 MHz    | 5 MHz      | 16QAM    | 1/12       | z(Axial)       | -2.80        | -35.50       | -55.74                | 1.61                | 32.70        | T4       | 37/ 38   |
|   |                        |            |          |            | y(Transversal) | 2.89         | -30.87       | -55.89                |                     | 33.77        | T4       | 39       |
| LTE Band 26 Voice<br>EVS WB Codec: 5.9 kbit/s | CH.26865<br>831.5 MHz  | 5 MHz      | 16QAM    | 1/12       | z(Axial)       | -0.32        | -34.62       | -55.74                | 1.58                | 34.30        | T4       | 40/ 41   |
|   |                        |            |          |            | y(Transversal) | 1.39         | -32.37       | -55.89                |                     | 33.76        | T4       | 42       |
| LTE Band 30 Voice<br>EVS WB Codec: 5.9 kbit/s | CH.27710<br>2310 MHz   | 5 MHz      | 16QAM    | 1/12       | z(Axial)       | 10.62        | -23.19       | -55.74                | 1.50                | 33.81        | T4       | 43/ 44   |
|   |                        |            |          |            | y(Transversal) | 1.27         | -31.64       | -55.89                |                     | 32.92        | T4       | 45       |
| LTE Band 66 Voice<br>EVS WB Codec: 5.9 kbit/s | CH.132322<br>1745 MHz  | 5 MHz      | 16QAM    | 1/12       | z(Axial)       | 4.46         | -30.51       | -55.74                | 1.69                | 34.97        | T4       | 46/ 47   |
|   |                        |            |          |            | y(Transversal) | -1.26        | -35.91       | -55.89                |                     | 34.66        | T4       | 48       |
| LTE Band 71 Voice<br>EVS WB Codec: 5.9 kbit/s | CH.133322<br>683 MHz   | 5 MHz      | 16QAM    | 1/12       | z(Axial)       | -0.28        | -33.11       | -55.74                | 1.47                | 32.83        | T4       | 49/ 50   |
|   |                        |            |          |            | y(Transversal) | -1.33        | -34.57       | -55.89                |                     | 33.24        | T4       | 51       |
| LTE Band 25 Voice<br>EVS WB Codec: 5.9 kbit/s | CH.26065<br>1852.5 MHz | 5 MHz      | 16QAM    | 1/12       | z(Axial)       | 7.10         | -27.37       | -55.74                | 1.50                | 34.47        | T4       |          |
|   |                        |            |          |            | y(Transversal) | -3.60        | -36.50       | -55.89                |                     | 32.90        | T4       |          |
|   | CH.26665<br>1912.5 MHz | 5 MHz      | 16QAM    | 1/12       | z(Axial)       | 0.24         | -33.31       | -55.74                | 1.54                | 33.55        | T4       |          |
|   |                        |            |          |            | y(Transversal) | -0.83        | -34.73       | -55.89                |                     | 33.90        | T4       |          |

Air Interface Investigation(Contiued)

LTE-TDD

| Mode  | Ch. Freq.            | BW             | BW/ Modulation | RB Config.     | Orientation    | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |
|---|----------------------|----------------|----------------|----------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------|
| LTE Band 41<br>Voice EVS-WB<br>Codec: 5.9kbit/s | CH.40620<br>2593 MHz | 20 MHz         | QPSK           | 1/0            | z(Axial)       | -0.56        | -28.35       | -55.80                | 1.69                | 27.79        | T3       | 52/ 53   |
|   |                      |                |                |                | y(Transversal) | -12.73       | -37.54       | -55.91                |                     | 24.81        | T3       | 54       |
|   |                      |                |                | 1/49           | z(Axial)       | 0.81         | -24.93       | -55.80                | 1.55                | 25.74        | T3       |          |
|   |                      |                |                |                | y(Transversal) | -0.38        | -26.28       | -55.91                |                     | 25.90        | T3       |          |
|   |                      |                |                | 1/99           | z(Axial)       | -0.25        | -27.03       | -55.80                | 1.56                | 26.78        | T3       |          |
|   |                      |                |                |                | y(Transversal) | 0.51         | -25.79       | -55.91                |                     | 26.30        | T3       |          |
|   |                      |                |                | 50/0           | z(Axial)       | 2.33         | -23.55       | -55.80                | 1.27                | 25.88        | T3       |          |
|   |                      |                |                |                | y(Transversal) | -1.60        | -28.61       | -55.91                |                     | 27.00        | T3       |          |
|   |                      |                |                | 50/25          | z(Axial)       | -3.70        | -30.29       | -55.80                | 1.48                | 26.58        | T3       |          |
|   |                      |                |                |                | y(Transversal) | 0.51         | -26.07       | -55.91                |                     | 26.58        | T3       |          |
|   |                      |                |                | 50/49          | z(Axial)       | 2.24         | -23.25       | -55.80                | 1.56                | 25.49        | T3       |          |
|   |                      |                |                |                | y(Transversal) | -2.09        | -28.53       | -55.91                |                     | 26.44        | T3       |          |
|   |                      |                |                | 100/0          | z(Axial)       | 2.94         | -23.54       | -55.80                | 1.61                | 26.48        | T3       |          |
|   |                      |                |                |                | y(Transversal) | -4.04        | -32.93       | -55.91                |                     | 28.89        | T3       |          |
|   |                      | 16QAM          | 1/0            | z(Axial)       | -2.49          | -28.36       | -55.76       | 1.56                  | 25.87               | T3           |          |          |
|   |                      |                |                | y(Transversal) | -3.31          | -29.20       | -55.82       |                       | 25.88               | T3           |          |          |
|   |                      | 64QAM          | 1/0            | z(Axial)       | 2.69           | -24.95       | -55.76       | 1.70                  | 27.64               | T3           |          |          |
|   |                      |                |                | y(Transversal) | -1.75          | -29.19       | -55.82       |                       | 27.44               | T3           |          |          |
|   |                      | 256QAM         | 1/0            | z(Axial)       | 1.11           | -26.21       | -55.76       | 1.60                  | 27.33               | T3           |          |          |
|   |                      |                |                | y(Transversal) | -10.71         | -39.58       | -55.82       |                       | 28.87               | T3           |          |          |
|   |                      | 15 MHz         | QPSK           | 1/0            | z(Axial)       | 3.66         | -22.77       | -55.76                | 1.41                | 26.43        | T3       |          |
|   |                      | y(Transversal) |                |                | -2.94          | -29.53       | -55.82       |                       | 26.59               | T3           |          |          |
|   |                      | 10 MHz         |                | 1/0            | z(Axial)       | -4.56        | -31.56       | -55.76                | 1.57                | 27.00        | T3       |          |
|   |                      |                |                |                | y(Transversal) | -4.52        | -31.63       | -55.82                |                     | 27.11        | T3       |          |
| 5 MHz   | 1/0                  | z(Axial)       |                | 2.20           | -24.22         | -55.76       | 1.57         | 26.42                 | T3                  |              |          |          |
|   |                      | y(Transversal) |                | 0.43           | -26.59         | -55.82       |              | 27.02                 | T3                  |              |          |          |

| Mode   | Ch. Freq.              | BW     | BW/ Modulation | RB Config. | Orientation    | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |
|--|------------------------|--------|----------------|------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------|
| LTE Band 38 Voice<br>EVS-WB Codec: 5.9kbit/s       | CH.38000<br>2595 MHz   | 20 MHz | QPSK           | 1/0        | z(Axial)       | 3.72         | -24.54       | -55.76                | 1.58                | 28.25        | T3       | 55/ 56   |
|  |                        |        |                |            | y(Transversal) | -0.46        | -27.86       | -55.82                |                     | 27.40        | T3       | 57       |
| LTE Band 40 Voice Lower<br>EVS-WB Codec: 5.9kbit/s | CH.38750<br>2310 MHz   | 10 MHz | QPSK           | 1/0        | z(Axial)       | 2.49         | -24.60       | -55.76                | 1.46                | 27.09        | T3       | 58/ 59   |
|  |                        |        |                |            | y(Transversal) | -8.77        | -36.97       | -55.82                |                     | 28.20        | T3       | 60       |
| LTE Band 40 Voice Upper<br>EVS-WB Codec: 5.9kbit/s | CH.39200<br>2355 MHz   |        |                |            | z(Axial)       | -0.19        | -27.35       | -55.76                | 1.39                | 27.16        | T3       |          |
|  |                        |        |                |            | y(Transversal) | -0.23        | -27.78       | -55.82                |                     | 27.54        | T3       |          |
| LTE Band 48 Voice<br>EVS-WB Codec: 5.9kbit/s       | CH.55990<br>3625 MHz   | 20 MHz | QPSK           | 1/0        | z(Axial)       | 1.12         | -24.11       | -55.76                | 1.66                | 25.23        | T3       | 61/ 62   |
|  |                        |        |                |            | y(Transversal) | -0.64        | -25.80       | -55.82                |                     | 25.16        | T3       | 63       |
| LTE Band 41 Voice<br>EVS-WB Codec: 5.9kbit/s       | CH.39750<br>2506 MHz   | 20 MHz | QPSK           | 1/0        | z(Axial)       | -5.08        | -31.48       | -55.76                | 1.82                | 26.40        | T3       |          |
|  |                        |        |                |            | y(Transversal) | 0.57         | -26.48       | -55.82                |                     | 27.05        | T3       |          |
|  | z(Axial)               |        |                |            | -1.29          | -27.73       | -55.76       | 1.72                  | 26.44               | T3           |          |          |
|  | y(Transversal)         |        |                |            | -12.30         | -39.09       | -55.82       |                       | 26.79               | T3           |          |          |
|  | z(Axial)               |        |                |            | 2.78           | -25.29       | -55.76       | 1.54                  | 28.07               | T3           |          |          |
|  | y(Transversal)         |        |                |            | -1.63          | -32.25       | -55.82       |                       | 30.63               | T4           |          |          |
|  | CH.41055<br>2636.5 MHz |        |                |            | z(Axial)       | 2.52         | -25.07       | -55.76                | 1.26                | 27.59        | T3       |          |
|  |                        |        |                |            | y(Transversal) | 0.32         | -26.72       | -55.82                |                     | 27.04        | T3       |          |
|  | CH.41490<br>2680 MHz   |        |                |            | z(Axial)       |              |              |                       |                     |              |          |          |
|  |                        |        |                |            | y(Transversal) |              |              |                       |                     |              |          |          |

## 12.4 VoWi-Fi Codec Investigation

An investigation between the various codec configurations (Low/High bit rates for Narrowband, Wideband) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed for each Wi-Fi 2.4 GHz and 5 GHz.

The highlighted results below were determined to be the worst case codec configuration(s) for Wi-Fi 2.4 GHz and 5 GHz.

| Codec Investigation |                 |        |        |                 |        |        |                 |   |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|-----------------|---|
| Codec State         | AMR-NB (kbit/s) |        |        | AMR-WB (kbit/s) |        |        | Orientation     | Band/ Bandwidth/<br>Channel             |
|                     | 4.75            | 7.4    | 12.2   | 6.6             | 15.85  | 23.85  |                 |   |
| ABM1 (dB/m)         | -0.15           | 2.11   | 0.26   | 7.18            | 8.03   | 7.96   | z (Axial)       | 802.11b CH.6<br>2437 MHz DSSS<br>1 Mbps |
| ABM2 (dBA/m)        | -36.37          | -33.91 | -35.42 | -45.27          | -45.27 | -45.02 |                 |   |
| S+N/N (dB)          | 36.22           | 36.01  | 35.68  | 52.45           | 53.30  | 52.98  |                 |   |
| Freq. Resposne(dB)  | 1.17            | 1.41   | 1.23   | 1.86            | 1.80   | 1.69   |                 |   |
| ABM1 (dB/m)         | -5.15           | -8.97  | -5.99  | 0.28            | 1.15   | 1.10   | y (Transversal) |   |
| ABM2 (dBA/m)        | -39.01          | -43.15 | -40.22 | -44.30          | -44.16 | -44.21 |                 |   |
| S+N/N (dB)          | 33.86           | 34.18  | 34.22  | 44.57           | 45.31  | 45.32  |                 |   |

| Codec Investigation |                 |        |        |                 |        |        |                  |        |        |                 |   |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|------------------|--------|--------|-----------------|---|
| Codec State         | EVS-NB (kbit/s) |        |        | EVS-WB (kbit/s) |        |        | EVS-SWB (kbit/s) |        |        | Orientation     | Band/<br>BandWidth/<br>Channel          |
|                     | 5.9             | 13.2   | 24.4   | 5.9             | 24.4   | 128    | 9.6              | 24.4   | 128    |                 |   |
| ABM1 (dB/m)         | -3.73           | 0.58   | 0.71   | -2.51           | 5.95   | 8.48   | 1.80             | 3.62   | 3.58   | z (Axial)       | 802.11b CH.6<br>2437 MHz DSSS<br>1 Mbps |
| ABM2 (dBA/m)        | -32.38          | -30.37 | -31.32 | -29.55          | -28.29 | -26.04 | -32.43           | -31.13 | -31.34 |                 |   |
| S+N/N (dB)          | 28.65           | 30.95  | 32.03  | 27.04           | 34.25  | 34.51  | 34.23            | 34.75  | 34.92  |                 |   |
| Freq.Resposne(dB)   | 2.00            | 1.87   | 1.94   | 2.00            | 1.72   | 1.66   | 1.20             | 1.24   | 1.18   |                 |   |
| ABM1 (dB/m)         | -14.74          | -8.56  | -8.63  | -8.79           | 0.56   | -0.01  | -3.06            | -3.76  | -3.00  | y (Transversal) |   |
| ABM2 (dBA/m)        | -41.32          | -39.58 | -39.94 | -38.27          | -33.31 | -34.18 | -36.94           | -37.34 | -37.19 |                 |   |
| S+N/N (dB)          | <b>26.58</b>    | 31.02  | 31.31  | 29.47           | 33.88  | 34.17  | 33.88            | 33.58  | 34.19  |                 |   |

| Codec Investigation |                 |        |        |                 |        |        |                 |  |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|-----------------|--|
| Codec State         | AMR-NB (kbit/s) |        |        | AMR-WB (kbit/s) |        |        | Orientation     | Band/ Bandwidth/ Channel                 |
|                     | 4.75            | 7.4    | 12.2   | 6.6             | 15.85  | 23.85  |                 |  |
| ABM1 (dB/m)         | 0.43            | 0.77   | 1.57   | 7.85            | 9.10   | 9.17   | z (Axial)       | 802.11a CH.40<br>5200 MHz BPSK<br>6 Mbps |
| ABM2 (dBA/m)        | -33.46          | -33.43 | -32.30 | -48.06          | -48.02 | -48.26 |                 |  |
| S+N/N (dB)          | 33.89           | 34.19  | 33.87  | 55.91           | 57.12  | 57.43  |                 |  |
| Freq. Resposne(dB)  | 1.42            | 1.51   | 1.25   | 1.41            | 1.43   | 1.40   |                 |  |
| ABM1 (dB/m)         | -7.61           | -4.25  | -3.54  | -1.85           | 2.17   | -1.05  | y (Transversal) |  |
| ABM2 (dBA/m)        | -41.02          | -37.49 | -36.93 | -49.66          | -46.71 | -49.89 |                 |  |
| S+N/N (dB)          | 33.41           | 33.24  | 33.39  | 47.81           | 48.88  | 48.84  |                 |  |

| Codec Investigation |                 |        |        |                 |        |        |                  |        |        |                 |  |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|------------------|--------|--------|-----------------|--|
| Codec State         | EVS-NB (kbit/s) |        |        | EVS-WB (kbit/s) |        |        | EVS-SWB (kbit/s) |        |        | Orientation     | Band/ BandWidth/ Channel                 |
|                     | 5.9             | 13.2   | 24.4   | 5.9             | 24.4   | 128    | 9.6              | 24.4   | 128    |                 |  |
| ABM1 (dB/m)         | -6.03           | 4.27   | 1.05   | -2.07           | 6.64   | 5.17   | 5.21             | 3.98   | 2.38   | z (Axial))      | 802.11a CH.40<br>5200 MHz BPSK<br>6 Mbps |
| ABM2 (dBA/m)        | -33.47          | -27.10 | -31.36 | -28.95          | -27.67 | -29.18 | -29.23           | -31.37 | -32.91 |                 |  |
| S+N/N (dB)          | 27.44           | 31.37  | 32.41  | <b>26.89</b>    | 34.32  | 34.36  | 34.44            | 35.34  | 35.29  |                 |  |
| Freq.Resposne(dB)   | 1.79            | 2.00   | 2.00   | 1.79            | 1.71   | 1.68   | 1.15             | 1.22   | 1.11   |                 |  |
| ABM1 (dB/m)         | -5.50           | -2.98  | -2.91  | -6.25           | 3.39   | 3.13   | -0.99            | -9.15  | -4.33  | y (Transversal) |  |
| ABM2 (dBA/m)        | -34.04          | -33.90 | -34.84 | -34.72          | -30.74 | -31.24 | -35.49           | -43.89 | -39.54 |                 |  |
| S+N/N (dB)          | 28.54           | 30.92  | 31.93  | 28.47           | 34.12  | 34.37  | 34.50            | 34.74  | 35.21  |                 |  |

### 12.5 VoWi-Fi Antennas Investigation

EVS-NB 5.9 kbit/s was the worst case bit-rates for 802.11b, 802.11a. The secondary antenna was investigated to determine which antennas yields a worse SNNR. The worst case codec and bit-rate from Antenna 1 was used to determine Antenna 2's exclusion. Since Antenna 2 yielded a better SNNR than Antenna 1, all subsequent measurements were measured using Antenna 1.

| Antenna        | Mode                                   | Ch. Freq.     | BW     | BW /Modulation | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T- Rating |
|----------------|--|---------------|--------|----------------|-------------|--------------|--------------|-----------------------|---------------------|--------------|-----------|
| WiFi Ant 1     | 802.11b Voice EVS-NB Codec: 5.9 kbit/s | CH.6 2437 MHz | 20 MHz | DSSS 1 Mbps    | z(Axial)    | -3.73        | -32.38       | -54.75                | 2.00                | 28.65        | T3        |
| y(Transversal) |  |               |        |                | -14.74      | -41.32       | -55.43       | <b>26.58</b>          | T3                  |              |           |
| WiFi Ant 2     |  |               |        |                | z(Axial)    | -7.40        | -34.81       | -54.75                | 1.91                | 27.41        | T3        |
| y(Transversal) |  |               |        |                | -10.51      | -37.47       | -55.43       |                       | 27.32               | T3           |           |

## 12.6 VoWi-Fi Air Interface Investigation

Using the data from §9.4, further testing was performed on the remaining 802.11 modes. The objective of these measurements is to ensure that changing the modulation, bandwidth, and data rate, whilst using the worst case codec configuration measured in §9.4, yields no unexpected variations.

| Moe  | Ch. Freq.        | BW             | BW/ Modeulation      | Orientation    | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |
|--|------------------|----------------|----------------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------|
| 802.11b<br>Voice EVS-NB<br>Codec: 5.9 kbit/s       | CH.6<br>2437 MHz | 20 MHz         | DSSS<br>1 Mbps       | z(Axial)       | -3.73        | -32.38       | -54.55                | 2.00                | 28.65        | T3       |          |
|  |                  |                |                      | y(Transversal) | -14.74       | -41.32       | -55.12                |                     | 26.58        | T3       |          |
|  |                  |                | CCK<br>5.5 Mbps      | z(Axial)       | -3.81        | -30.00       | -54.55                | 1.92                | <b>26.18</b> | T3       | 64/65    |
|  |                  |                |                      | y(Transversal) | -13.74       | -40.94       | -55.12                |                     | 27.20        | T3       | 66       |
|  | CCK<br>11 Mbps   |                | z(Axial)             | 2.11           | -27.49       | -54.55       | 1.81                  | 29.60               | T3           |          |          |
|  |                  |                | y(Transversal)       | -8.01          | -34.99       | -55.12       |                       | 26.98               | T3           |          |          |
|  | CH.1<br>2412 MHz |                | CCK<br>5.5 Mbps      | z(Axial)       | 0.01         | -29.54       | -54.55                | 1.58                | 29.55        | T3       |          |
|  |                  |                |                      | y(Transversal) | -11.22       | -40.33       | -55.12                |                     | 29.11        | T3       |          |
| CH.11<br>2462 MHz                                  | CCK<br>5.5 Mbps  | z(Axial)       | -3.44                | -31.10         | -54.55       | 1.75         | 27.66                 | T3                  |              |          |          |
|  |                  | y(Transversal) | -6.24                | -33.89         | -55.12       |              | 27.65                 | T3                  |              |          |          |
| 802.11g<br>Voice EVS-NB<br>Codec: 5.9 kbit/s       | CH.6<br>2437 MHz | 20 MHz         | QPSK<br>18 Mbps      | z(Axial)       | -8.65        | -35.11       | -54.55                | 1.57                | 26.46        | T3       |          |
|  |                  |                |                      | y(Transversal) | -7.68        | -36.31       | -55.12                |                     | 28.63        | T3       |          |
| 802.11n HT20<br>Voice EVS-NB<br>Codec: 5.9 kbit/s  | CH.6<br>2437 MHz | 20 MHz         | MCS 3<br>26 Mbps     | z(Axial)       | -5.73        | -34.17       | -54.55                | 1.80                | 28.44        | T3       |          |
|  |                  |                |                      | y(Transversal) | -8.35        | -36.78       | -55.12                |                     | 28.43        | T3       |          |
| 802.11ax HE20<br>Voice EVS-NB<br>Codec: 5.9 kbit/s | CH.6<br>2437 MHz | 20 MHz         | MCS 11<br>143.4 Mbps | z(Axial)       | -0.85        | -28.15       | -54.55                | 1.54                | 27.30        | T3       |          |
|  |                  |                |                      | y(Transversal) | -8.96        | -38.69       | -55.12                |                     | 29.73        | T3       |          |

**VoWi-Fi Air Interface Investigation (Continued)**

| Mode  | Ch. Freq.         | BW     | BW /Modulation     | Orientation    | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |
|---|-------------------|--------|--------------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------|
| 802.11a<br>Voice<br>EVS-WB<br>Codec:<br>5.9kbit/s           | CH.40<br>5200 MHz | 20 MHz | BPSK<br>6 Mbps     | z(Axial)       | -2.07        | -28.95       | -54.66                | 1.79                | 26.89        | T3       |          |
|   |                   |        |                    | y(Transversal) | -6.25        | -34.72       | -55.23                |                     | 28.47        | T3       |          |
|   |                   |        | QPSK<br>18 Mbps    | z(Axial)       | -6.97        | -33.03       | -54.66                | 1.43                | <b>26.06</b> | T3       | 67/68    |
|   |                   |        |                    | y(Transversal) | -11.10       | -39.25       | -55.23                |                     | 28.15        | T3       | 69       |
|   |                   |        | 64QAM<br>54 Mbps   | z(Axial)       | 2.38         | -25.53       | -54.66                | 2.00                | 27.91        | T3       |          |
|   |                   |        |                    | y(Transversal) | -9.32        | -39.26       | -55.23                |                     | 29.94        | T3       |          |
| 802.11n<br>HT20<br>Voice<br>EVS-WB<br>Codec:<br>5.9kbit/s   | CH.40<br>5200 MHz | 20 MHz | MCS 0<br>6.5 Mbps  | z(Axial)       | -13.30       | -41.50       | -54.66                | 1.34                | 28.21        | T3       |          |
|   |                   |        |                    | y(Transversal) | -7.54        | -35.52       | -55.23                |                     | 27.98        | T3       |          |
|   |                   |        | MCS 3<br>26 Mbps   | z(Axial)       | 4.61         | -23.56       | -54.66                | 1.49                | 28.16        | T3       |          |
|   |                   |        |                    | y(Transversal) | -6.15        | -32.94       | -55.23                |                     | 26.78        | T3       |          |
|   |                   |        | MCS 7<br>65 Mbps   | z(Axial)       | -7.14        | -36.44       | -54.66                | 1.89                | 29.30        | T3       |          |
|   |                   |        |                    | y(Transversal) | -6.62        | -34.48       | -55.23                |                     | 27.86        | T3       |          |
| 802.11n<br>HT40<br>Voice<br>EVS-WB<br>Codec:<br>5.9kbit/s   | CH.38<br>5190 MHz | 40 MHz | MCS 0<br>13.5 Mbps | z(Axial)       | -2.75        | -33.93       | -54.66                | 1.35                | 31.18        | T4       |          |
|   |                   |        |                    | y(Transversal) | -7.10        | -35.48       | -55.23                |                     | 28.37        | T3       |          |
|   |                   |        | MCS 3<br>54 Mbps   | z(Axial)       | -14.32       | -42.41       | -54.66                | 1.44                | 28.08        | T3       |          |
|   |                   |        |                    | y(Transversal) | -7.56        | -35.61       | -55.23                |                     | 28.05        | T3       |          |
|   |                   |        | MCS 7<br>135 Mbps  | z(Axial)       | -6.70        | -40.72       | -54.66                | 1.49                | 34.03        | T4       |          |
|   |                   |        |                    | y(Transversal) | -2.27        | -35.99       | -55.23                |                     | 33.72        | T4       |          |
| 802.11ac<br>VHT20<br>Voice<br>EVS-WB<br>Codec:<br>5.9kbit/s | CH.40<br>5200 MHz | 20 MHz | MCS 0<br>6.5 Mbps  | z(Axial)       | -8.54        | -36.80       | -54.66                | 1.40                | 28.26        | T3       |          |
|   |                   |        |                    | y(Transversal) | -12.39       | -42.05       | -55.23                |                     | 29.66        | T3       |          |
|   |                   |        | MCS 4<br>39 Mbps   | z(Axial)       | 1.67         | -25.54       | -54.66                | 1.30                | 27.21        | T3       |          |
|   |                   |        |                    | y(Transversal) | -3.26        | -32.31       | -55.23                |                     | 29.04        | T3       |          |
|   |                   |        | MCS 8<br>78 Mbps   | z(Axial)       | -6.72        | -35.89       | -54.66                | 1.39                | 29.17        | T3       |          |
|   |                   |        |                    | y(Transversal) | -5.45        | -33.61       | -55.23                |                     | 28.15        | T3       |          |
| 802.11ac<br>VHT40<br>Voice<br>EVS-WB<br>Codec:<br>5.9kbit/s | CH.38<br>5190 MHz | 40 MHz | MCS 0<br>13.5 Mbps | z(Axial)       | -7.02        | -35.30       | -54.02                | 1.29                | 28.27        | T3       |          |
|   |                   |        |                    | y(Transversal) | -9.54        | -37.68       | -54.39                |                     | 28.14        | T3       |          |
|   |                   |        | MCS 4<br>81 Mbps   | z(Axial)       | -3.35        | -31.03       | -54.02                | 1.43                | 27.69        | T3       |          |
|   |                   |        |                    | y(Transversal) | -9.54        | -37.61       | -54.39                |                     | 28.07        | T3       |          |
|   |                   |        | MCS 9<br>180 Mbps  | z(Axial)       | -8.49        | -36.80       | -54.02                | 1.79                | 28.30        | T3       |          |
|   |                   |        |                    | y(Transversal) | -8.10        | -35.96       | -54.39                |                     | 27.86        | T3       |          |
| 802.11ac<br>VHT80<br>Voice<br>EVS-WB<br>Codec:<br>5.9kbit/s | CH.42<br>5210 MHz | 80 MHz | MCS 0<br>29.3 Mbps | z(Axial)       | 2.59         | -26.40       | -54.02                | 1.85                | 28.98        | T3       |          |
|   |                   |        |                    | y(Transversal) | -5.86        | -35.09       | -54.39                |                     | 29.22        | T3       |          |
|   |                   |        | MCS 4<br>175.5Mbps | z(Axial)       | -8.45        | -36.62       | -54.02                | 1.38                | 28.17        | T3       |          |
|   |                   |        |                    | y(Transversal) | -12.51       | -41.65       | -54.39                |                     | 29.14        | T3       |          |
|   |                   |        | MCS 9<br>390 Mbps  | z(Axial)       | -8.35        | -37.37       | -54.02                | 1.84                | 29.02        | T3       |          |
|   |                   |        |                    | y(Transversal) | -12.99       | -41.46       | -54.39                |                     | 28.47        | T3       |          |

| Mode   | Ch. Freq.          | BW     | BW /Modulation      | Orientation    | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |
|--|--------------------|--------|---------------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------|
| 802.11ax<br>HE20<br>Voice<br>EVS-WB<br>Codec:<br>5.9kbit/s | CH.40<br>5200 MHz  | 20 MHz | MCS 0<br>8.6 Mbps   | z(Axial)       | -3.01        | -31.89       | -54.02                | 1.95                | 28.88        | T3       |          |
|  |                    |        |                     | y(Transversal) | -5.30        | -35.54       | -54.39                |                     | 30.24        | T4       |          |
|  |                    |        | MCS 6<br>77.4 Mbps  | z(Axial)       | 1.07         | -27.41       | -54.02                | 1.81                | 28.48        | T3       |          |
|  |                    |        |                     | y(Transversal) | -6.40        | -35.50       | -54.39                |                     | 29.10        | T3       |          |
| MCS 11<br>143.4 Mbps                                       | z(Axial)           | 3.73   | -26.87              | -54.02         | 1.99         | 30.59        | T4                    |                     |              |          |          |
|  | y(Transversal)     | -6.82  | -35.14              | -54.39         |              | 28.31        | T3                    |                     |              |          |          |
| 802.11ax<br>HE40<br>Voice<br>EVS-WB<br>Codec:<br>5.9kbit/s | CH.38<br>5190 MHz  | 40 MHz | MCS 0<br>17.2 Mbps  | z(Axial)       | -1.88        | -28.01       | -54.02                | 2.00                | 26.13        | T3       |          |
|  |                    |        |                     | y(Transversal) | -13.24       | -40.16       | -54.39                |                     | 26.92        | T3       |          |
|  |                    |        | MCS 6<br>154.9Mbps  | z(Axial)       | -6.23        | -34.58       | -54.02                | 1.95                | 28.35        | T3       |          |
|  |                    |        |                     | y(Transversal) | -11.37       | -39.49       | -54.39                |                     | 28.12        | T3       |          |
| MCS 11<br>286.8Mbps  | z(Axial)           | -5.95  | -32.41              | -54.02         | 2.00         | 26.46        | T3                    |                     |              |          |          |
|  | y(Transversal)     | -11.24 | -40.09              | -54.39         |              | 28.85        | T3                    |                     |              |          |          |
| 802.11ax<br>HE80<br>Voice<br>EVS-WB<br>Codec:<br>5.9kbit/s | CH.42<br>5210 MHz  | 80 MHz | MCS 0<br>36.05 Mbps | z(Axial)       | 2.00         | -28.66       | -54.54                | 1.87                | 30.65        | T4       |          |
|  |                    |        |                     | y(Transversal) | -8.18        | -37.87       | -55.15                |                     | 29.69        | T3       |          |
|  |                    |        | MCS 6<br>324.3Mbps  | z(Axial)       | 0.36         | -28.90       | -54.54                | 1.99                | 29.26        | T3       |          |
|  |                    |        |                     | y(Transversal) | -3.64        | -33.93       | -55.15                |                     | 30.29        | T4       |          |
| MCS 11<br>600.5Mbps  | z(Axial)           | 3.16   | -25.89              | -54.54         | 1.86         | 29.05        | T3                    |                     |              |          |          |
|  | y(Transversal)     | -10.12 | -39.33              | -55.15         |              | 29.21        | T3                    |                     |              |          |          |
| 802.11a<br>Voice<br>EVS-WB<br>Codec: 5.9kbit/s             | CH.36<br>5180 MHz  | 20 MHz | QPSK<br>18 Mbps     | z(Axial)       | -3.86        | -32.27       | -54.54                | 1.97                | 28.41        | T3       | 70/71    |
|  |                    |        |                     | y(Transversal) | -2.05        | -33.70       | -55.15                |                     | 31.65        | T4       | 72       |
| 802.11a<br>Voice<br>EVS-WB<br>Codec: 5.9kbit/s             | CH.48<br>5240 MHz  | 20 MHz | QPSK<br>18 Mbps     | z(Axial)       | -6.39        | -34.78       | -54.54                | 2.00                | 28.39        | T3       | 73/74    |
|  |                    |        |                     | y(Transversal) | -6.61        | -35.66       | -55.15                |                     | 29.05        | T3       | 75       |
| 802.11a<br>Voice<br>EVS-WB<br>Codec: 5.9kbit/s             | CH.60<br>5300 MHz  | 20 MHz | QPSK<br>18 Mbps     | z(Axial)       | 0.22         | -29.11       | -54.54                | 2.00                | 29.33        | T3       | 76/77    |
|  |                    |        |                     | y(Transversal) | -8.23        | -36.68       | -55.15                |                     | 28.45        | T3       | 78       |
| 802.11a<br>Voice<br>EVS-WB<br>Codec: 5.9kbit/s             | CH.120<br>5600 MHz | 20 MHz | QPSK<br>18 Mbps     | z(Axial)       | -2.32        | -32.16       | -54.54                | 2.00                | 29.84        | T3       | 79/80    |
|  |                    |        |                     | y(Transversal) | -11.21       | -40.01       | -55.15                |                     | 28.79        | T3       | 81       |
| 802.11a<br>Voice<br>EVS-WB<br>Codec: 5.9kbit/s             | CH.157<br>5785 MHz | 20 MHz | QPSK<br>18 Mbps     | z(Axial)       | -12.54       | -40.66       | -54.54                | 1.75                | 28.11        | T3       | 82/83    |
|  |                    |        |                     | y(Transversal) | -6.27        | -34.34       | -55.15                |                     | 28.07        | T3       | 84       |



## 12.7 OTT Codec Investigation

The DUT's nested OTT application supports range of codec bit rate 6 – 64 kbit/s, thus an investigation between the various codec configurations (6/64 as Low/High bit rates) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each service type.

The table below compares the varying codec configurations.

| Codec Investigation |                         |        |              |                |   |
|---------------------|-------------------------|--------|--------------|----------------|---|
| Codec State         | codec bit rate (kbit/s) |        |              | Orientation    | Band/ BandWidth/ Channel                                      |
|                     | 6                       | 40     | 75           |                |   |
| ABM1 (dB/m)         | 6.93                    | 7.25   | 4.58         | z (Axial)      | GSM 1900<br>EDGE 2 slots<br>CH.661<br>1880 MHz                |
| ABM2 (dBA/m)        | -36.66                  | -33.43 | -36.49       |                |   |
| S+N/N (dB)          | 43.59                   | 40.68  | 41.07        |                |   |
| Freq.Resposne (dB)  | 1.13                    | 1.21   | 1.29         |                |   |
| ABM1 (dB/m)         | 2.63                    | -0.34  | -1.59        | y(Transversal) |   |
| ABM2 (dBA/m)        | -32.45                  | -36.35 | -38.68       |                |   |
| S+N/N (dB)          | <b>35.08</b>            | 36.01  | 37.09        |                |   |
| ABM1 (dB/m)         | 3.97                    | 4.04   | 6.84         | z (Axial)      |   |
| ABM2 (dBA/m)        | -47.47                  | -45.25 | -41.11       |                |   |
| S+N/N (dB)          | 51.44                   | 49.29  | 47.96        |                |   |
| Freq.Resposne (dB)  | 1.21                    | 1.31   | 1.32         |                |   |
| ABM1 (dB/m)         | 2.63                    | 0.09   | 0.14         | y(Transversal) |   |
| ABM2 (dBA/m)        | -46.23                  | -47.62 | -46.30       |                |   |
| S+N/N (dB)          | 48.86                   | 47.71  | <b>46.44</b> |                |   |
| ABM1 (dB/m)         | 3.85                    | 6.29   | 5.83         | z (Axial)      | LTE Band 25<br>5 MHz 16QAM 1RB12offset<br>CH.26365 1882.5 MHz |
| ABM2 (dBA/m)        | -45.01                  | -42.11 | -41.45       |                |   |
| S+N/N (dB)          | 48.86                   | 48.39  | 47.29        |                |   |
| Freq.Resposne (dB)  | 1.35                    | 1.26   | 1.24         |                |   |
| ABM1 (dB/m)         | -1.28                   | 2.39   | 1.78         | y(Transversal) |   |
| ABM2 (dBA/m)        | -49.14                  | -43.57 | -43.17       |                |   |
| S+N/N (dB)          | 47.86                   | 45.96  | <b>44.95</b> |                |   |

| Codec Investigation |                         |        |              |                |  |
|---------------------|-------------------------|--------|--------------|----------------|--|
| Codec State         | codec bit rate (kbit/s) |        |              | Orientation    | Band/ BandWidth/ Channel                                   |
|                     | 6                       | 40     | 75           |                |  |
| ABM1 (dB/m)         | 6.55                    | 6.48   | 6.75         | z (Axial)      | LTE Band 41<br>20 MHz QPSK 1RB0offset<br>CH.40620 2593 MHz |
| ABM2 (dBA/m)        | -41.20                  | -40.27 | -39.59       |                |  |
| S+N/N (dB)          | 47.74                   | 46.74  | 46.34        |                |  |
| Freq.Resposne (dB)  | 1.10                    | 1.19   | 1.28         |                |  |
| ABM1 (dB/m)         | 2.35                    | 2.87   | 2.82         | y(Transversal) |  |
| ABM2 (dBA/m)        | -40.49                  | -40.52 | -39.77       |                |  |
| S+N/N (dB)          | 42.85                   | 43.39  | <b>42.59</b> |                |  |
| ABM1 (dB/m)         | 9.94                    | 7.36   | 10.15        | z (Axial)      |  |
| ABM2 (dBA/m)        | -44.99                  | -44.64 | -40.54       |                |  |
| S+N/N (dB)          | 54.93                   | 52.01  | 50.69        |                |  |
| Freq.Resposne (dB)  | 1.06                    | 1.30   | 1.29         |                |  |
| ABM1 (dB/m)         | -1.97                   | 1.72   | 1.48         | y(Transversal) |  |
| ABM2 (dBA/m)        | -50.97                  | -46.86 | -46.29       |                |  |
| S+N/N (dB)          | 48.99                   | 48.58  | <b>47.77</b> |                |  |
| ABM1 (dB/m)         | 10.61                   | 10.64  | 10.56        | z (Axial)      | 802.11b CH.6<br>2437 MHz<br>5.5 Mbps                       |
| ABM2 (dBA/m)        | -40.29                  | -39.35 | -38.57       |                |  |
| S+N/N (dB)          | 50.90                   | 49.99  | 49.12        |                |  |
| Freq.Resposne (dB)  | 1.12                    | 1.31   | 1.38         |                |  |
| ABM1 (dB/m)         | 1.36                    | 1.49   | 1.75         | y(Transversal) |  |
| ABM2 (dBA/m)        | -44.34                  | -44.67 | -44.02       |                |  |
| S+N/N (dB)          | <b>45.69</b>            | 46.16  | 45.77        |                |  |
| ABM1 (dB/m)         | 9.92                    | 10.40  | 10.39        | z (Axial)      |  |
| ABM2 (dBA/m)        | -44.13                  | -41.48 | -40.40       |                |  |
| S+N/N (dB)          | 54.05                   | 51.87  | 50.80        |                |  |
| Freq.Resposne (dB)  | 1.24                    | 1.29   | 1.26         |                |  |
| ABM1 (dB/m)         | 1.15                    | 1.53   | -1.27        | y(Transversal) |  |
| ABM2 (dBA/m)        | -47.13                  | -46.26 | -48.74       |                |  |
| S+N/N (dB)          | 48.27                   | 47.80  | <b>47.47</b> |                |  |

## 12.8 OTT Air Interface Investigation

| Mode  | Ch. Freq.              | BW    | BW/ Mode | RB Config. | Orientation    | ABM1 dB(A/m)   | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |  |
|---|------------------------|-------|----------|------------|----------------|----------------|--------------|-----------------------|---------------------|--------------|----------|----------|--|
| GSM850<br>EDGE 2 slots Duo<br>Codec: 6 kbit/s           | CH.190<br>836.6 MHz    |       |          |            | z(Axial)       | 6.87           | -36.59       | -55.74                | 1.28                | 43.46        | T4       | 85/ 86   |  |
|   |                        |       |          |            | y(Transversal) | 1.79           | -38.23       | -55.81                |                     | 40.02        | T4       | 87       |  |
| GSM1900<br>EDGE 2 slots Duo<br>Codec: 6 kbit/s          | CH.512<br>1850.2 MHz   |       |          |            | z(Axial)       | 6.99           | -35.39       | -55.74                | 1.90                | 42.38        | T4       |          |  |
|   |                        |       |          |            | y(Transversal) | 2.13           | -31.69       | -55.81                |                     | 33.82        | T4       |          |  |
|   | CH.661<br>1880.0 MHz   |       |          |            |                | z(Axial)       | 6.93         | -36.66                | -55.74              | 1.13         | 43.59    | T4       |  |
|   |                        |       |          |            |                | y(Transversal) | 2.63         | -32.45                | -55.81              |              | 35.08    | T4       |  |
| CH.810<br>1909.8 MHz                                    |                        |       |          |            | z(Axial)       | 6.87           | -34.34       | -55.74                | 1.35                | 41.21        | T4       | 88/ 89   |  |
|   |                        |       |          |            | y(Transversal) | -1.70          | -35.15       | -55.81                |                     | <b>33.45</b> | T4       | 90       |  |
| WCDMA Band II<br>HSUPA subtest1 Duo<br>Codec: 75 kbit/s | CH.9400<br>1880.0 MHz  |       |          |            | z(Axial)       | 3.17           | -46.94       | -55.74                | 1.32                | 50.11        | T4       | 91/ 92   |  |
|   |                        |       |          |            | y(Transversal) | 0.10           | -48.65       | -55.81                |                     | 48.75        | T4       | 93       |  |
| WCDMA Band IV<br>HSUPA subtest1 Duo<br>Codec: 75 kbit/s | CH.1412<br>1732.4 MHz  |       |          |            | z(Axial)       | 6.84           | -41.11       | -55.74                | 1.32                | 47.96        | T4       | 94/ 95   |  |
|   |                        |       |          |            | y(Transversal) | 0.14           | -46.30       | -55.81                |                     | 46.44        | T4       | 96       |  |
| WCDMA Band V<br>HSUPA subtest1 Duo<br>Codec: 75 kbit/s  | CH.4183<br>836.6 MHz   |       |          |            | z(Axial)       | 4.03           | -46.73       | -55.74                | 1.30                | 50.77        | T4       | 97/ 98   |  |
|   |                        |       |          |            | y(Transversal) | -0.13          | -48.52       | -55.81                |                     | 48.39        | T4       | 99       |  |
| LTE Band 2<br>Google Duo<br>Codec: 75 kbit/s            | CH. 18900<br>1880 MHz  | 5 MHz | 16QAM    | 1/12       | z(Axial)       | 4.60           | -42.25       | -55.83                | 1.23                | 46.85        | T4       | 100/ 101 |  |
|   |                        |       |          |            | y(Transversal) | 1.91           | -43.10       | -55.85                |                     | 45.01        | T4       | 102      |  |
| LTE Band 4<br>Google Duo<br>Codec: 75 kbit/s            | CH.20175<br>1732.5 MHz | 5 MHz | 16QAM    | 1/12       | z(Axial)       | 5.90           | -41.80       | -55.83                | 1.26                | 47.70        | T4       | 103/ 104 |  |
|   |                        |       |          |            | y(Transversal) | 1.73           | -43.59       | -55.85                |                     | 45.31        | T4       | 105      |  |
| LTE Band 5<br>Google Duo<br>Codec: 75 kbit/s            | CH.20525<br>836.5 MHz  | 5 MHz | 16QAM    | 1/12       | z(Axial)       | 5.89           | -41.54       | -55.83                | 1.25                | 47.43        | T4       | 106/ 107 |  |
|   |                        |       |          |            | y(Transversal) | 1.94           | -43.92       | -55.85                |                     | 45.86        | T4       | 108      |  |
| LTE Band 7<br>Google Duo<br>Codec: 75 kbit/s            | CH.21100<br>2535 MHz   | 5 MHz | 16QAM    | 1/12       | z(Axial)       | 5.77           | -41.25       | -55.83                | 1.25                | 47.02        | T4       | 109/ 110 |  |
|   |                        |       |          |            | y(Transversal) | 1.92           | -42.50       | -55.85                |                     | 44.42        | T4       | 111      |  |
| LTE Band 12<br>Google Duo<br>Codec: 75 kbit/s           | CH.23095<br>707.5 MHz  | 5 MHz | 16QAM    | 1/12       | z(Axial)       | 4.70           | -42.53       | -55.83                | 1.25                | 47.23        | T4       | 112/ 113 |  |
|   |                        |       |          |            | y(Transversal) | 1.90           | -44.00       | -55.85                |                     | 45.90        | T4       | 114      |  |
| LTE Band 13<br>Google Duo<br>Codec: 75 kbit/s           | CH.23255<br>784.5 MHz  | 5 MHz | 16QAM    | 1/12       | z(Axial)       | 6.05           | -40.66       | -55.83                | 1.25                | 46.70        | T4       | 115/ 116 |  |
|   |                        |       |          |            | y(Transversal) | 2.15           | -42.88       | -55.85                |                     | 45.03        | T4       | 117      |  |
| LTE Band 14<br>Google Duo<br>Codec: 75 kbit/s           | CH.23330<br>793 MHz    | 5 MHz | 16QAM    | 1/12       | z(Axial)       | 5.94           | -41.28       | -55.83                | 1.27                | 47.21        | T4       | 118/ 119 |  |
|   |                        |       |          |            | y(Transversal) | 1.83           | -43.35       | -55.85                |                     | 45.18        | T4       | 120      |  |
| LTE Band 25<br>Google Duo<br>Codec: 75 kbit/s           | CH.26365<br>1882.5 MHz | 5 MHz | 16QAM    | 1/12       | z(Axial)       | 5.83           | -41.45       | -55.83                | 1.24                | 47.29        | T4       | 121/ 122 |  |
|   |                        |       |          |            | y(Transversal) | 1.78           | -43.17       | -55.85                |                     | 44.95        | T4       | 123      |  |
| LTE Band 26<br>Google Duo<br>Codec: 75 kbit/s           | CH.26865<br>831.5 MHz  | 5 MHz | 16QAM    | 1/12       | z(Axial)       | 3.61           | -43.65       | -55.83                | 1.22                | 47.26        | T4       | 124/ 125 |  |
|   |                        |       |          |            | y(Transversal) | 2.11           | -43.75       | -55.85                |                     | 45.86        | T4       | 126      |  |
| LTE Band 30<br>Google Duo<br>Codec: 75 kbit/s           | CH.27710<br>2310 MHz   | 5 MHz | 16QAM    | 1/12       | z(Axial)       | 5.76           | -40.86       | -55.83                | 1.23                | 46.62        | T4       | 127/ 128 |  |
|   |                        |       |          |            | y(Transversal) | 1.85           | -42.17       | -55.85                |                     | 44.02        | T4       | 129      |  |
| LTE Band 66<br>Google Duo<br>Codec: 75 kbit/s           | CH.132322<br>1745 MHz  | 5 MHz | 16QAM    | 1/12       | z(Axial)       | 6.39           | -41.13       | -55.83                | 1.24                | 47.52        | T4       | 130/ 131 |  |
|   |                        |       |          |            | y(Transversal) | 2.42           | -43.11       | -55.85                |                     | 45.53        | T4       | 132      |  |
| LTE Band 71<br>Google Duo<br>Codec: 75 kbit/s           | CH.133297<br>680.5 MHz | 5 MHz | 16QAM    | 1/12       | z(Axial)       | 6.49           | -40.66       | -55.83                | 1.26                | 47.15        | T4       | 133/ 134 |  |
|   |                        |       |          |            | y(Transversal) | 2.29           | -42.75       | -55.85                |                     | 45.04        | T4       | 135      |  |

| Mode:   | Ch./ Freq.             | BW/ Data Rate | BW/ Modulation | RB Config. | Orientation    | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR(dB) | T-Rating | Plot No. |
|---|------------------------|---------------|----------------|------------|----------------|--------------|--------------|-----------------------|---------------------|-------------|----------|----------|
| LTE Band 38<br>Google Duo<br>Codec: 75 kbit/s           | CH.38000<br>2595 MHz   | 20 MHz        | QPSK           | 1/0        | z(Axial)       | 6.44         | -39.25       | -55.80                | 1.24                | 45.69       | T4       | 136/ 137 |
|   |                        |               |                |            | y(Transversal) | 2.77         | -38.80       | -55.93                |                     | 41.57       | T4       | 138      |
| LTE Band 40<br>Google Duo<br>Codec: 75 kbit/s           | CH.38750<br>2310 MHz   | 10 MHz        | QPSK           | 1/0        | z(Axial)       | 6.57         | -39.15       | -55.80                | 1.23                | 45.71       | T4       | 139/ 140 |
|   |                        |               |                |            | y(Transversal) | 2.60         | -39.36       | -55.93                |                     | 41.96       | T4       | 141      |
| LTE Band 40<br>Google Duo<br>Codec: 75 kbit/s           | CH.39200<br>2355 MHz   | 10 MHz        | QPSK           | 1/0        | z(Axial)       | 6.67         | -39.56       | -55.80                | 1.25                | 46.23       | T4       | 142/ 143 |
|   |                        |               |                |            | y(Transversal) | 2.52         | -39.66       | -55.93                |                     | 42.18       | T4       | 144      |
| LTE Band 41<br>Google Duo<br>Codec: 75 kbit/s           | CH.41055<br>2636.5 MHz | 20 MHz        | QPSK           | 1/0        | z(Axial)       | 6.75         | -39.59       | -55.80                | 1.28                | 46.34       | T4       | 145/ 146 |
|   |                        |               |                |            | y(Transversal) | 2.82         | -39.77       | -55.93                |                     | 42.59       | T4       | 147      |
| LTE Band 48<br>Google Duo<br>Codec: 75 kbit/s           | CH.55990<br>3626 MHz   | 20 MHz        | QPSK           | 1/0        | z(Axial)       | 8.34         | -36.18       | -55.80                | 1.29                | 44.52       | T4       | 148/ 149 |
|   |                        |               |                |            | y(Transversal) | 1.13         | -34.72       | -55.93                |                     | 35.84       | T4       | 150      |
| Wi-Fi 2.4 GHz 802.11b<br>Google Duo<br>Codec: 6 kbit/s  | CH.6<br>2437 MHz       | 20 MHz        | 5.5 Mbps       |            | z(Axial)       | 10.61        | -40.29       | -55.79                | 1.12                | 50.90       | T4       | 151/ 152 |
|   |                        |               |                |            | y(Transversal) | 1.36         | -44.34       | -55.88                |                     | 45.69       | T4       | 153      |
| U-NII 5.2 GHz 802.11a<br>Google Duo<br>Codec: 75 kbit/s | CH.40<br>5200 MHz      | 20 MHz        | 18 Mbps        |            | z(Axial)       | 10.39        | -40.40       | -55.79                | 1.26                | 50.80       | T4       | 154/155  |
|   |                        |               |                |            | y(Transversal) | -1.27        | -48.74       | -55.88                |                     | 47.47       | T4       | 156      |
| U-NII 5.3 GHz 802.11a<br>Google Duo<br>Codec: 75 kbit/s | CH.60<br>5300 MHz      | 20 MHz        | 18 Mbps        |            | z(Axial)       | 11.97        | -39.07       | -55.79                | 1.35                | 51.04       | T4       | 157/158  |
|   |                        |               |                |            | y(Transversal) | -2.04        | -48.80       | -55.88                |                     | 46.76       | T4       | 159      |
| U-NII 5.6 GHz 802.11a<br>Google Duo<br>Codec: 75 kbit/s | CH.120<br>5600 MHz     | 20 MHz        | 18 Mbps        |            | z(Axial)       | 7.80         | -41.20       | -55.79                | 1.22                | 49.00       | T4       | 160/161  |
|   |                        |               |                |            | y(Transversal) | 0.39         | -46.02       | -55.88                |                     | 46.42       | T4       | 162      |
| U-NII 5.8 GHz 802.11a<br>Google Duo<br>Codec: 75 kbit/s | CH.157<br>5785 MHz     | 20 MHz        | 18 Mbps        |            | z(Axial)       | 10.86        | -39.52       | -55.79                | 1.25                | 50.38       | T4       | 163/164  |
|   |                        |               |                |            | y(Transversal) | 1.17         | -46.71       | -55.88                |                     | 47.89       | T4       | 165      |
| EVDO BC0 Rev.A<br>Google Duo<br>Codec: 75 kbit/s        | CH.384<br>836.52 MHz   |               |                |            | z(Axial)       | 8.54         | -42.01       | -55.79                | 1.32                | 50.55       | T4       | 166/167  |
|   |                        |               |                |            | y(Transversal) | -1.65        | -49.43       | -55.88                |                     | 47.78       | T4       | 168      |
| EVDO BC1 Rev.A<br>Google Duo<br>Codec: 75 kbit/s        | CH.600<br>1880 MHz     |               |                |            | z(Axial)       | 10.07        | -40.35       | -55.79                | 1.27                | 50.43       | T4       | 169/170  |
|   |                        |               |                |            | y(Transversal) | -1.30        | -48.70       | -55.88                |                     | 47.40       | T4       | 171      |
| EVDO BC10 Rev.A<br>Google Duo<br>Codec: 75 kbit/s       | CH.670<br>822.75 MHz   |               |                |            | z(Axial)       | 10.15        | -40.54       | -55.79                | 1.29                | 50.69       | T4       | 172/173  |
|   |                        |               |                |            | y(Transversal) | 1.48         | -46.29       | -55.88                |                     | 47.77       | T4       | 174      |

## 12.9 Radio Configuration for OTT VoIP (NR)

An investigation was performed to determine the waveform, modulation, and RB configuration to be used for testing. Due to equipment limitations, the worst-case ABM1 from OTT VoIP was used with the ABM2 measured for each NR radio configuration. DFTs-OFDM 64QAM, 80RB, 0 offset was determined to be the worst-case configuration for the handset and will be used for full testing. Frequency Response measurements were not possible due to equipment limitations

An investigation was performed to determine the worst-case NR band to be used for OTT VoIP testing. NR n71 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different NR bands

### 12.9.1 Interim Procedure for evaluation OTT VoIP(NR)

The following procedure is used to evaluate OTT VoIP (NR) given equipment limitations.

- a. This procedure is applicable for OTT VoIP (NR) voice calls that use the same protocol, codec(s), and reference level as OTT VoIP (LTE) (i.e. -20dBm0).
- b. Establish the ABM1NR value by using the ABM1LTE magnetic intensity for an LTE call using a correlating LTE band through existing procedures and test equipment.
- c. Establish an ABM2NR value using factory test mode (FTM) to simulate a NR connection for the desired NR band and channel under test.
- d. The following information is documented in Section 9:
  1. ABM2LTE and ABM2NR for respective tests.
  2. Calculate SNNR:
    - i.  $ABM1 = ABM1_{LTE}$
    - ii.  $ABM2 = ABM2_{NR}$
    - iii.  $SNNR_{NR} = [ABM1_{LTE} - ABM2_{NR}] - 3dB$
  - A 3dB margin is built in to ensure conservative results with this interim procedure.

The above is only applicable for OTT VoIP scenarios, this device does not support VoNR over IMS.

The manufacturer has confirmed the handset as designed is expected to exhibit similar audio intensity levels between an OTT VoIP call placed over a 4G LTE and a 5G Sub-6GHz data connection.

NR-FDD

| Mode        | Ch. Freq.             | BW             | Waveform  | BW/ Modulation | RB Config.     | Orientation    | ABM1 dB(A/m)   | ABM2 dB(A/m)   | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | ABM SNRNR -3dB(dB) | T- Rating | Plot No. |       |     |  |
|-------------|-----------------------|----------------|-----------|----------------|----------------|----------------|----------------|----------------|-----------------------|---------------------|--------------|--------------------|-----------|----------|-------|-----|--|
| NR Band n66 | CH.349000<br>1745 MHz | 40 MHz         | DFTs-OFDM | QPSK           | 1/1            | z(Axial)       | 6.39           | -45.36         | -54.74                |                     | 51.75        | 48.75              | T4        |          |       |     |  |
|             |                       |                |           |                |                | y(Transversal) | 2.42           | -48.02         | -55.23                |                     | 50.44        | 47.44              | T4        |          |       |     |  |
|             |                       |                |           |                | 1/107          | z(Axial)       | 6.39           | -49.24         | -54.74                |                     | 55.63        | 52.63              | T4        |          |       |     |  |
|             |                       |                |           |                |                | y(Transversal) | 2.42           | -48.41         | -55.23                |                     | 50.83        | 47.83              | T4        |          |       |     |  |
|             |                       |                |           |                | 1/214          | z(Axial)       | 6.39           | -47.12         | -54.74                |                     | 53.51        | 50.51              | T4        |          |       |     |  |
|             |                       |                |           |                |                | y(Transversal) | 2.42           | -47.32         | -55.23                |                     | 49.74        | 46.74              | T4        |          |       |     |  |
|             |                       |                |           |                | 108/0          | z(Axial)       | 6.39           | -46.15         | -54.74                |                     | 52.54        | 49.54              | T4        |          |       |     |  |
|             |                       |                |           |                |                | y(Transversal) | 2.42           | -47.21         | -55.23                |                     | 49.63        | 46.63              | T4        |          |       |     |  |
|             |                       |                |           |                | 108/54         | z(Axial)       | 6.39           | -47.89         | -54.74                |                     | 54.28        | 51.28              | T4        |          |       |     |  |
|             |                       |                |           |                |                | y(Transversal) | 2.42           | -46.89         | -55.23                |                     | 49.31        | 46.31              | T4        |          |       |     |  |
|             |                       |                |           |                | 108/108        | z(Axial)       | 6.39           | -48.28         | -54.74                |                     | 54.67        | 51.67              | T4        |          |       |     |  |
|             |                       |                |           |                |                | y(Transversal) | 2.42           | -47.54         | -55.23                |                     | 49.96        | 46.96              | T4        |          |       |     |  |
|             |                       |                |           |                | 216/0          | z(Axial)       | 6.39           | -48.82         | -54.74                |                     | 55.21        | 52.21              | T4        |          |       |     |  |
|             |                       |                |           |                |                | y(Transversal) | 2.42           | -46.24         | -55.23                |                     | 48.66        | 45.66              | T4        |          |       |     |  |
|             |                       |                |           |                | BPSK           | 216/0          | z(Axial)       | 6.39           | -46.69                | -54.74              |              | 53.08              | 50.08     | T4       |       |     |  |
|             |                       |                |           |                |                |                | y(Transversal) | 2.42           | -46.55                | -55.23              |              | 48.97              | 45.97     | T4       |       |     |  |
|             |                       |                |           |                | 16QAM          | 216/0          | z(Axial)       | 6.39           | -46.33                | -54.74              |              | 52.72              | 49.72     | T4       |       |     |  |
|             |                       |                |           |                |                |                | y(Transversal) | 2.42           | -48.83                | -55.23              |              | 51.25              | 48.25     | T4       |       |     |  |
|             |                       |                |           |                | 64QAM          | 216/0          | z(Axial)       | 6.39           | -47.06                | -54.74              |              | 53.45              | 50.45     | T4       |       |     |  |
|             |                       |                |           |                |                |                | y(Transversal) | 2.42           | -48.74                | -55.23              |              | 51.16              | 48.16     | T4       |       |     |  |
|             |                       |                | 256QAM    | 216/0          | z(Axial)       | 6.39           | -44.82         | -54.74         |                       | 51.21               | 48.21        | T4                 |           |          |       |     |  |
|             |                       |                |           |                | y(Transversal) | 2.42           | -48.34         | -55.23         |                       | 50.76               | 47.76        | T4                 |           |          |       |     |  |
|             |                       |                | CP-OFDM   |                |                | QPSK           | 1/1            | z(Axial)       | 6.39                  | -43.64              | -54.74       |                    | 50.03     | 47.03    | T4    |     |  |
|             |                       |                |           |                |                |                |                | y(Transversal) | 2.42                  | -46.01              | -55.23       |                    | 48.43     | 45.43    | T4    |     |  |
|             |                       |                |           |                |                |                | 1/107          | z(Axial)       | 6.39                  | -47.19              | -54.74       |                    | 53.58     | 50.58    | T4    |     |  |
|             |                       |                |           |                |                |                |                | y(Transversal) | 2.42                  | -45.93              | -55.23       |                    | 48.35     | 45.35    | T4    |     |  |
|             |                       |                |           |                |                |                | 1/214          | z(Axial)       | 6.39                  | -46.85              | -54.74       |                    | 53.24     | 50.24    | T4    |     |  |
|             |                       |                |           |                |                |                |                | y(Transversal) | 2.42                  | -45.92              | -55.23       |                    | 48.34     | 45.34    | T4    |     |  |
|             |                       |                |           |                |                |                | 108/0          | z(Axial)       | 6.39                  | -44.22              | -54.74       |                    | 50.61     | 47.61    | T4    | 175 |  |
|             |                       |                |           |                |                |                |                | y(Transversal) | 2.42                  | -45.58              | -55.23       |                    | 48.00     | 45.00    | T4    | 176 |  |
|             |                       |                |           |                |                |                | 108/54         | z(Axial)       | 6.39                  | -48.45              | -54.74       |                    | 54.84     | 51.84    | T4    |     |  |
|             |                       |                |           |                |                |                |                | y(Transversal) | 2.42                  | -45.71              | -55.23       |                    | 48.13     | 45.13    | T4    |     |  |
|             |                       |                |           |                |                |                | 108/108        | z(Axial)       | 6.39                  | -50.17              | -54.74       |                    | 56.56     | 53.56    | T4    |     |  |
|             |                       |                |           |                |                |                |                | y(Transversal) | 2.42                  | -46.36              | -55.23       |                    | 48.78     | 45.78    | T4    |     |  |
|             |                       |                |           |                |                |                | 216/0          | z(Axial)       | 6.39                  | -50.33              | -54.74       |                    | 56.72     | 53.72    | T4    |     |  |
|             |                       |                |           |                |                |                |                | y(Transversal) | 2.42                  | -45.88              | -55.23       |                    | 48.30     | 45.30    | T4    |     |  |
|             |                       |                |           |                |                |                | 16QAM          | 108/0          | z(Axial)              | 6.39                | -48.93       | -54.74             |           | 55.32    | 52.32 | T4  |  |
|             |                       |                |           |                |                |                |                |                | y(Transversal)        | 2.42                | -48.11       | -55.23             |           | 50.53    | 47.53 | T4  |  |
|             |                       |                |           |                |                |                | 64QAM          | 108/0          | z(Axial)              | 6.39                | -46.69       | -54.74             |           | 53.08    | 50.08 | T4  |  |
|             |                       |                |           |                |                |                |                |                | y(Transversal)        | 2.42                | -47.80       | -55.23             |           | 50.22    | 47.22 | T4  |  |
| 256QAM      | 108/0                 | z(Axial)       |           |                |                |                | 6.39           | -46.05         | -54.74                |                     | 52.44        | 49.44              | T4        |          |       |     |  |
|             |                       | y(Transversal) |           |                |                |                | 2.42           | -48.20         | -55.23                |                     | 50.62        | 47.62              | T4        |          |       |     |  |

| Mode             | Ch. Freq.               | BW             | Waveform | BW/ Modulation | RB Config. | Orientation    | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | ABM SNRNR -3dB(dB) | T-Rating | Plot No. |
|------------------|-------------------------|----------------|----------|----------------|------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|--------------------|----------|----------|
| NR Band n66      | CH.349000<br>1745 MHz   | 30 MHz         | CP-OFDM  | QPSK           | 80/0       | z(Axial)       | 6.39         | -46.9        | -54.74                |                     | 53.29        | 50.29              | T4       |          |
|                  |                         |                |          |                |            | y(Transversal) | 2.42         | -48.2        | -55.23                |                     | 50.62        | 47.62              | T4       |          |
|                  |                         | 20 MHz         |          |                | 53/0       | z(Axial)       | 6.39         | -47.53       | -54.74                |                     | 53.92        | 50.92              | T4       |          |
|                  |                         |                |          |                |            | y(Transversal) | 2.42         | -47.42       | -55.23                |                     | 49.84        | 46.84              | T4       |          |
|                  |                         | 15 MHz         |          |                | 40/0       | z(Axial)       | 6.39         | -45.70       | -54.74                |                     | 52.09        | 49.09              | T4       |          |
|                  |                         |                |          |                |            | y(Transversal) | 2.42         | -48.36       | -55.23                |                     | 50.78        | 47.78              | T4       |          |
|                  |                         | 10 MHz         |          |                | 26/0       | z(Axial)       | 6.39         | -44.42       | -54.74                |                     | 50.81        | 47.81              | T4       |          |
|                  |                         |                |          |                |            | y(Transversal) | 2.42         | -48.35       | -55.23                |                     | 50.77        | 47.77              | T4       |          |
| 5 MHz            | 13/0                    | z(Axial)       | 6.39     | -41.77         | -54.74     |                | 48.16        | 45.16        | T4                    |                     |              |                    |          |          |
|                  |                         | y(Transversal) | 2.42     | -47.44         | -55.23     |                | 49.86        | 46.86        | T4                    |                     |              |                    |          |          |
| NR Band n2       | CH.376000<br>1880 MHz   | 20 MHz         | CP-OFDM  | QPSK           | 53/0       | z(Axial)       | 4.6          | -49.19       | -54.74                |                     | 53.79        | 50.79              | T4       | 177      |
|                  |                         |                |          |                |            | y(Transversal) | 1.91         | -48.06       | -55.23                |                     | 49.97        | 46.97              | T4       | 178      |
| NR Band n5       | CH.167300<br>836.5 MHz  | 20 MHz         | CP-OFDM  | QPSK           | 53/0       | z(Axial)       | 5.89         | -46.61       | -54.74                |                     | 52.5         | 49.5               | T4       | 179      |
|                  |                         |                |          |                |            | y(Transversal) | 1.94         | -47.80       | -55.23                |                     | 49.74        | 46.74              | T4       | 180      |
| NR Band n12      | CH.141500<br>707.5 MHz  | 15 MHz         | CP-OFDM  | QPSK           | 40/0       | z(Axial)       | 4.7          | -51.72       | -54.74                |                     | 56.42        | 53.42              | T4       | 181      |
|                  |                         |                |          |                |            | y(Transversal) | 1.9          | -50.21       | -55.23                |                     | 52.11        | 49.11              | T4       | 182      |
| NR Band n25      | CH.376500<br>1882.5 MHz | 40 MHz         | CP-OFDM  | QPSK           | 108/0      | z(Axial)       | 5.83         | -49.40       | -54.74                |                     | 55.23        | 52.23              | T4       | 183      |
|                  |                         |                |          |                |            | y(Transversal) | 1.78         | -49.75       | -55.23                |                     | 51.53        | 48.53              | T4       | 184      |
| NR Band n30      | CH.462000<br>2310 MHz   | 10 MHz         | CP-OFDM  | QPSK           | 26/0       | z(Axial)       | 5.76         | -46.72       | -54.74                |                     | 52.48        | 49.48              | T4       | 185      |
|                  |                         |                |          |                |            | y(Transversal) | 1.85         | -47.83       | -55.23                |                     | 49.68        | 46.68              | T4       | 186      |
| NR Band n71      | CH.136100<br>680.5 MHz  | 20 MHz         | CP-OFDM  | QPSK           | 53/0       | z(Axial)       | 6.49         | -43.76       | -54.74                |                     | 50.25        | 47.25              | T4       | 187      |
|                  |                         |                |          |                |            | y(Transversal) | 2.29         | -48.95       | -55.23                |                     | 51.24        | 48.24              | T4       | 188      |
| NR Band n66 Low  | CH.346000<br>1730 MHz   | 40 MHz         | CP-OFDM  | QPSK           | 108/0      | z(Axial)       | 6.39         | -45.43       | -54.74                |                     | 51.82        | 50.79              | T4       | 189      |
|                  |                         |                |          |                |            | y(Transversal) | 2.42         | -47.23       | -55.23                |                     | 49.65        | 46.65              | T4       | 190      |
| NR Band n66 High | CH.352000<br>1760 MHz   | 40 MHz         | CP-OFDM  | QPSK           | 108/0      | z(Axial)       | 6.39         | -44.85       | -54.74                |                     | 51.24        | 48.24              | T4       | 191      |
|                  |                         |                |          |                |            | y(Transversal) | 2.42         | -47.28       | -55.23                |                     | 49.70        | 46.70              | T4       | 192      |



NR-TDD

| Mode        | Ch. Freq.                | BW      | Waceform | BW/ Modulation | RB Config. | Orientation    | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | ABM SNRNR -3dB(dB) | T-Rating | Plot No. |
|-------------|--------------------------|---------|----------|----------------|------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|--------------------|----------|----------|
| NR Band n77 | CH.650000<br>3750 MHz    | 100 MHz | CP-OFDM  | QPSK           | 137/0      | z(Axial)       | 6.75         | -41.61       | -54.74                |                     | 48.36        | 45.36              | T4       |          |
|             |                          |         |          |                |            | y(Transversal) | 2.82         | -47.22       | -55.23                |                     | 50.04        | 47.04              | T4       |          |
|             |                          | 90 MHz  |          |                | 123/0      | z(Axial)       | 6.75         | -45.05       | -54.74                |                     | 51.80        | 48.80              | T4       |          |
|             |                          |         |          |                |            | y(Transversal) | 2.82         | -47.78       | -55.23                |                     | 50.60        | 47.60              | T4       |          |
|             |                          | 80 MHz  |          |                | 109/0      | z(Axial)       | 6.75         | -46.89       | -54.74                |                     | 53.64        | 50.64              | T4       |          |
|             |                          |         |          |                |            | y(Transversal) | 2.82         | -47.43       | -55.23                |                     | 50.25        | 47.25              | T4       |          |
|             |                          | 60 MHz  |          |                | 81/0       | z(Axial)       | 6.75         | -47.08       | -54.74                |                     | 53.83        | 50.83              | T4       |          |
|             |                          |         |          |                |            | y(Transversal) | 2.82         | -49.10       | -55.23                |                     | 51.92        | 48.92              | T4       |          |
|             |                          | 50 MHz  |          |                | 67/0       | z(Axial)       | 6.75         | -39.33       | -54.74                |                     | 46.08        | 43.08              | T4       |          |
|             |                          |         |          |                |            | y(Transversal) | 2.82         | -48.46       | -55.23                |                     | 51.28        | 48.28              | T4       |          |
|             |                          | 40 MHz  |          |                | 53/0       | z(Axial)       | 6.75         | -38.27       | -54.74                |                     | 45.02        | 42.02              | T4       |          |
|             |                          |         |          |                |            | y(Transversal) | 2.82         | -48.35       | -55.23                |                     | 51.17        | 48.17              | T4       |          |
|             |                          | 30 MHz  |          |                | 39/0       | z(Axial)       | 6.75         | -45.05       | -54.74                |                     | 51.80        | 48.80              | T4       |          |
|             |                          |         |          |                |            | y(Transversal) | 2.82         | -47.78       | -55.23                |                     | 50.60        | 47.60              | T4       |          |
|             |                          | 20 MHz  |          |                | 26/0       | z(Axial)       | 6.75         | -37.39       | -54.74                |                     | <b>44.14</b> | <b>41.14</b>       | T4       | 193      |
|             |                          |         |          |                |            | y(Transversal) | 2.82         | -47.93       | -55.23                |                     | 50.75        | 47.75              | T4       | 194      |
| NR Band n41 | CH.518598<br>2592.99 MHz | 20 MHz  | CP-OFDM  | QPSK           | 26/0       | z(Axial)       | 6.75         | -36.81       | -54.74                |                     | <b>43.56</b> | <b>40.56</b>       | T4       | 195      |
|             |                          |         |          |                |            | y(Transversal) | 2.82         | -48.25       | -55.23                |                     | 51.07        | 48.07              | T4       | 196      |
| NR Band n41 | CH.509202<br>2546.01 MHz | 20 MHz  | CP-OFDM  | QPSK           | 26/0       | z(Axial)       | 6.75         | -45.38       | -54.74                |                     | 52.13        | 49.13              | T4       |          |
|             |                          |         |          |                |            | y(Transversal) | 2.82         | -46.76       | -55.23                |                     | 49.58        | 46.58              | T4       |          |
| NR Band n41 | CH.513900<br>2569.5 MHz  | 20 MHz  | CP-OFDM  | QPSK           | 26/0       | z(Axial)       | 6.75         | -43.34       | -54.74                |                     | 50.09        | 47.09              | T4       |          |
|             |                          |         |          |                |            | y(Transversal) | 2.82         | -45.41       | -55.23                |                     | 48.23        | 45.23              | T4       |          |
| NR Band n41 | CH.523302<br>2616.51 MHz | 20 MHz  | CP-OFDM  | QPSK           | 26/0       | z(Axial)       | 6.75         | -40.05       | -54.74                |                     | 46.80        | 43.80              | T4       |          |
|             |                          |         |          |                |            | y(Transversal) | 2.82         | -48.21       | -55.23                |                     | 51.03        | 48.03              | T4       |          |
| NR Band n41 | CH.528000<br>2640 MHz    | 20 MHz  | CP-OFDM  | QPSK           | 26/0       | z(Axial)       | 6.75         | -44.09       | -54.74                |                     | 50.84        | 47.84              | T4       |          |
|             |                          |         |          |                |            | y(Transversal) | 2.82         | -46.46       | -55.23                |                     | 49.28        | 46.28              | T4       |          |



## Attachment 1. HAC T-COIL Test Plots

**Plot No.1**

**GSM850 FR V1 190ch z(axial)**

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
 Output Gain: 24.93  
 Measure Window Start: 300ms  
 Measure Window Length: 1000ms  
 BWC applied: 0.15 dB  
 Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 1.87 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 12.5, -8.3, 3.7 mm

**Cursor:**

ABM2 = -32.23 dBA/m  
 Location: 12.5, -8.3, 3.7 mm

**Cursor:**

ABM1/ABM2 = 34.09 dB  
 ABM1 comp = 1.87 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 12.5, -8.3, 3.7 mm

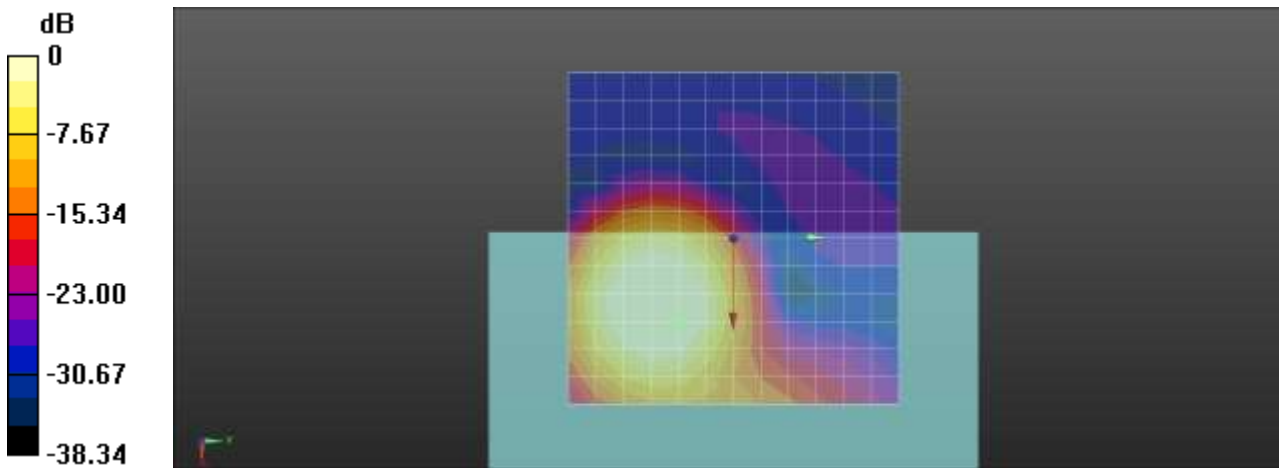

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.2**

**GSM850 190ch FR V1 190ch Freq. Response**

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav

Output Gain: 53.58

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.51 dB

BWC Factor = 9.47 dB

Location: 12.2, -9.2, 3.7 mm

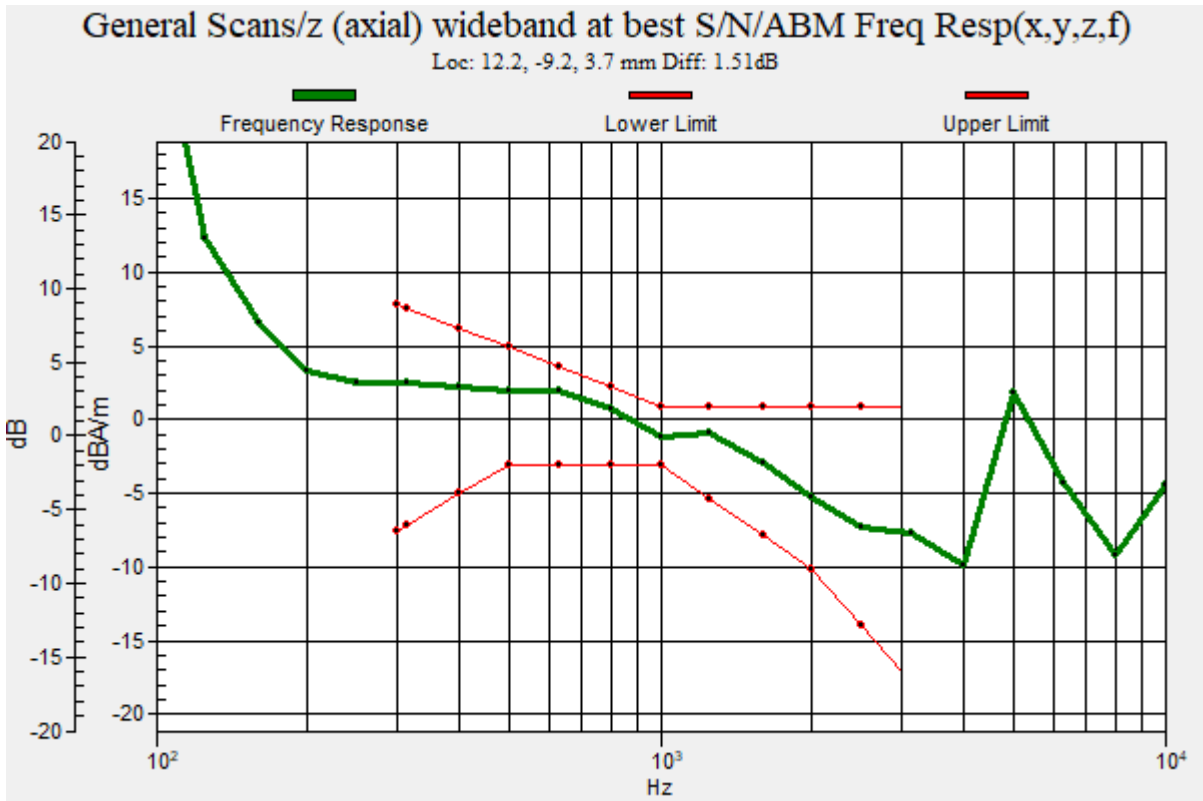

**Plot No.3**

**GSM850 190ch FR V1 190ch y(transversal)**

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -3.74 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, 0, 3.7 mm

**Cursor:**

ABM2 = -33.83 dBA/m

Location: 8.3, 0, 3.7 mm


**Cursor:**

ABM1/ABM2 = 30.09 dB

ABM1 comp = -3.74 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, 0, 3.7 mm

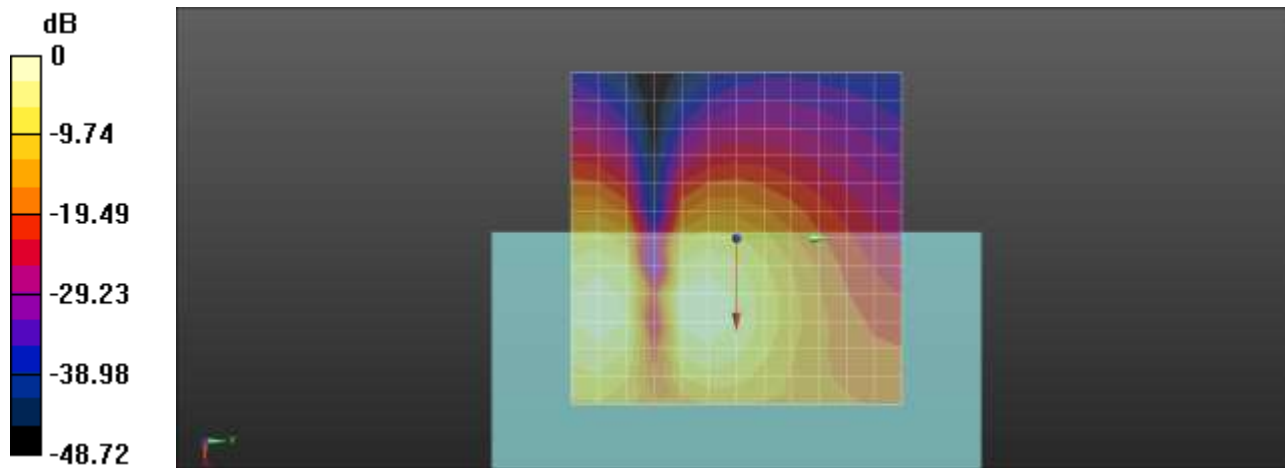

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.4**

**GSM1900 FR V1 661ch z(axial)**

Communication System: UID 0, GSM 1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
 Output Gain: 24.93  
 Measure Window Start: 300ms  
 Measure Window Length: 1000ms  
 BWC applied: 0.15 dB  
 Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 2.18 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -28.49 dBA/m  
 Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM1/ABM2 = 30.67 dB  
 ABM1 comp = 2.18 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 8.3, -12.5, 3.7 mm

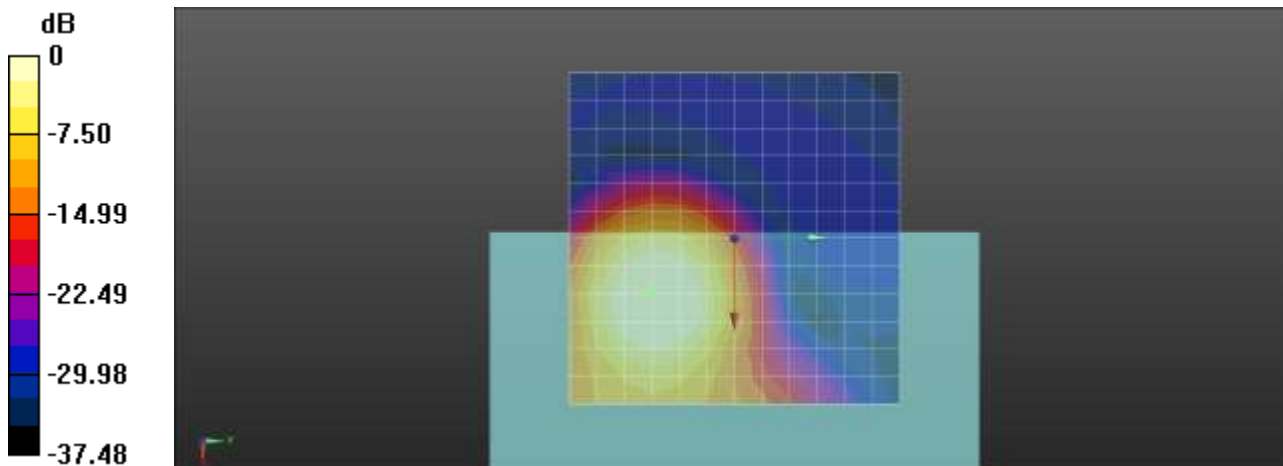

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.5**

**GSM1900 FR V1 661ch Freq. Response**


Communication System: UID 0, GSM 1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 53.58  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.61 dB  
 BWC Factor = 9.47 dB  
 Location: 8.2, -11.6, 3.7 mm

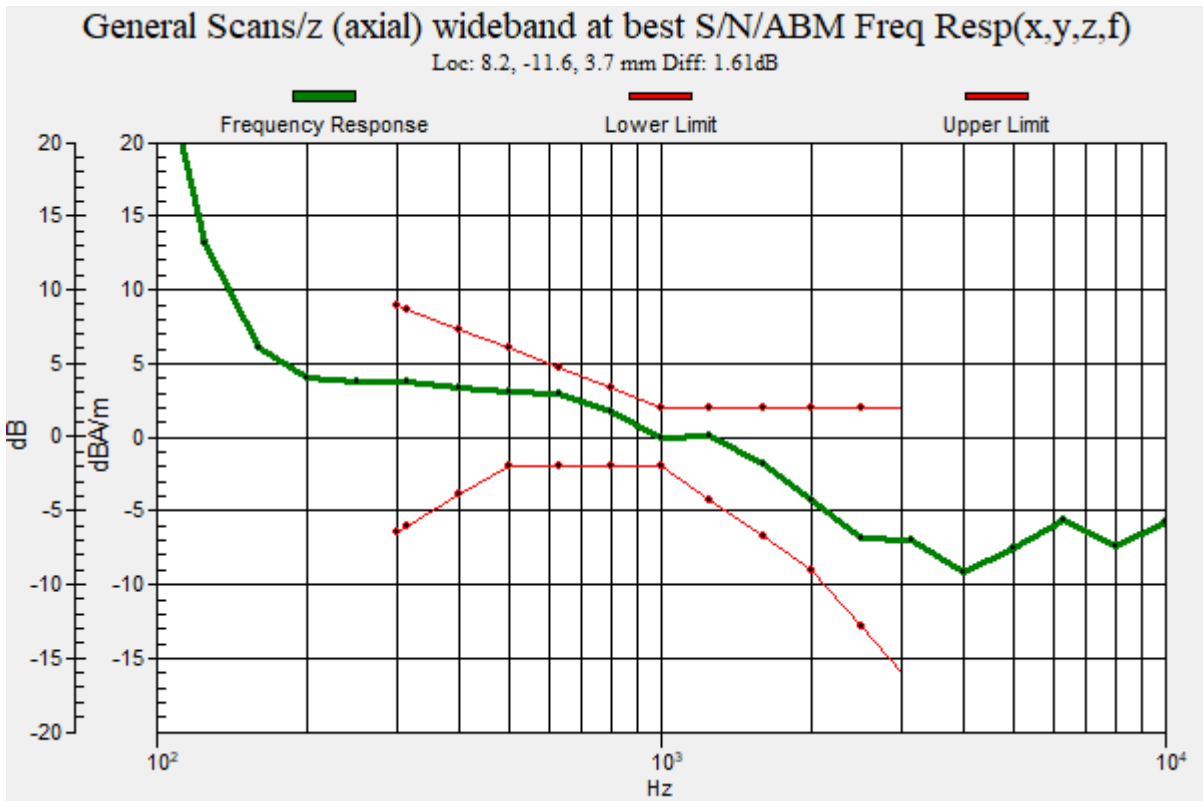

**Plot No.6**

**GSM1900 FR V1 661ch y(transversal)**

Communication System: UID 0, GSM 1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -1.01 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -20.8, 3.7 mm

**Cursor:**

ABM2 = -25.97 dBA/m

Location: 8.3, -20.8, 3.7 mm


**Cursor:**

ABM1/ABM2 = 24.96 dB

ABM1 comp = -1.01 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -20.8, 3.7 mm

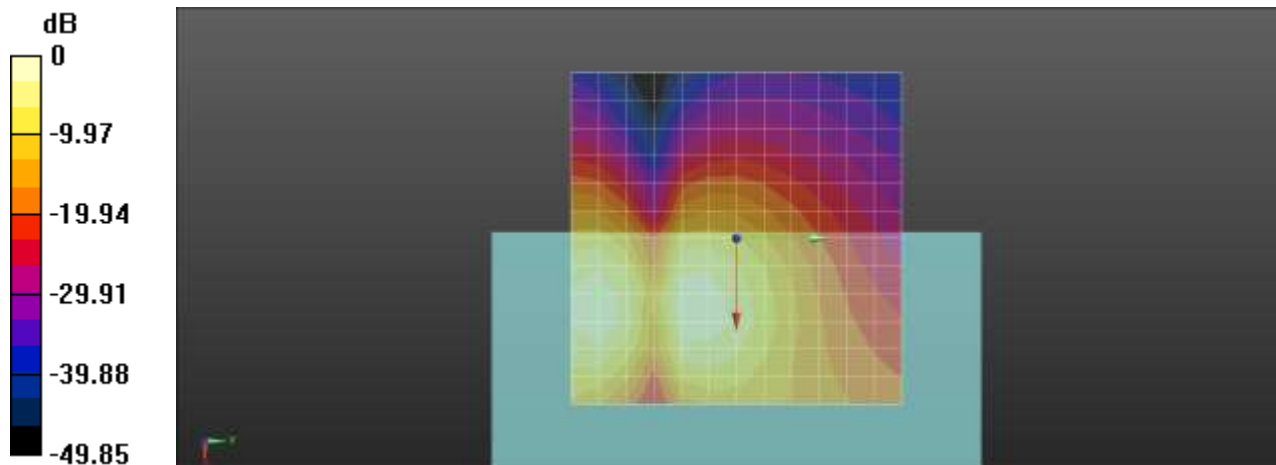

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.7**

**WCDMA Band 2 9400ch AMR WB 6\_6 z(axial)**

Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
 Output Gain: 24.96  
 Measure Window Start: 300ms  
 Measure Window Length: 1000ms  
 BWC applied: 0.15 dB  
 Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 0.18 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 0, -16.7, 3.7 mm

**Cursor:**

ABM2 = -31.32 dBA/m  
 Location: 0, -16.7, 3.7 mm

**Cursor:**

ABM1/ABM2 = 31.51 dB  
 ABM1 comp = 0.18 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 0, -16.7, 3.7 mm

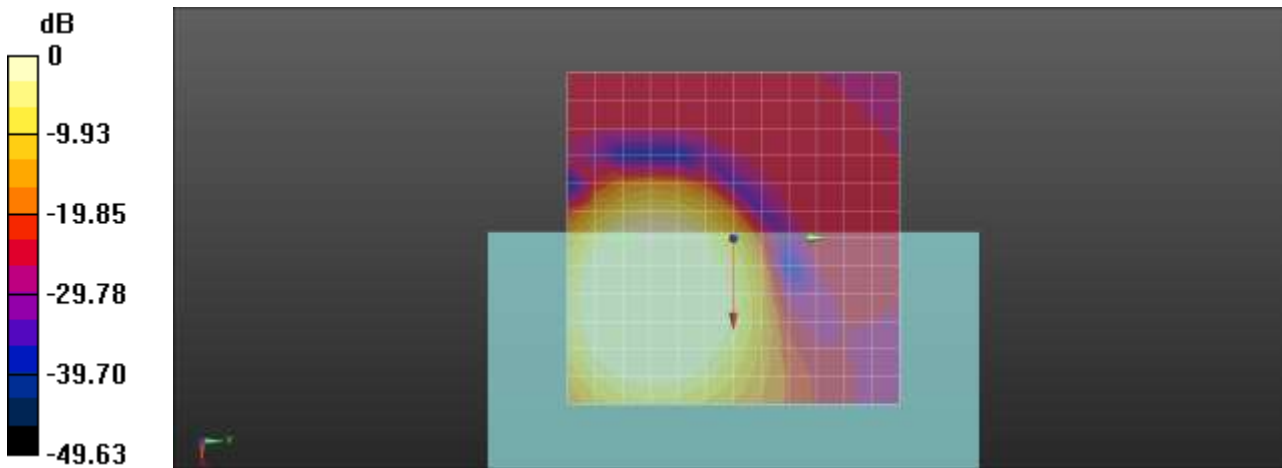

0 dB = 1.000 A/m = 0.00 dBA/m



**Plot No.8**

**WCDMA Band 2 9400ch AMR WB 6\_6 Freq. Response**

Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav

Output Gain: 53.6

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.46 dB

BWC Factor = 9.47 dB

Location: -2.8, -1.6, 3.7 mm

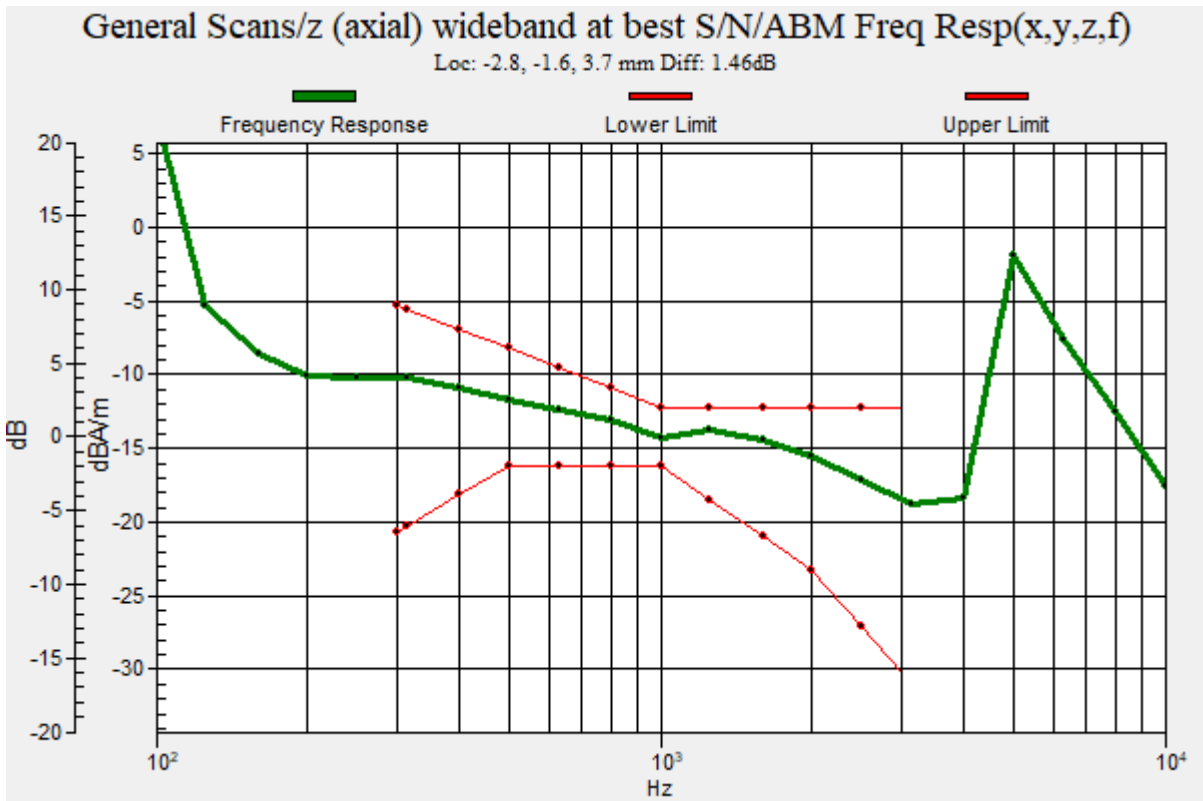

**Plot No.9**

**WCDMA Band 2 9400ch AMR WB 6\_6 y(transversal)**

Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
 Output Gain: 24.96  
 Measure Window Start: 300ms  
 Measure Window Length: 1000ms  
 BWC applied: 0.15 dB  
 Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 2.30 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 8.3, -16.7, 3.7 mm

**Cursor:**

ABM2 = -29.19 dBA/m  
 Location: 8.3, -16.7, 3.7 mm

**Cursor:**

ABM1/ABM2 = 31.50 dB  
 ABM1 comp = 2.30 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 8.3, -16.7, 3.7 mm

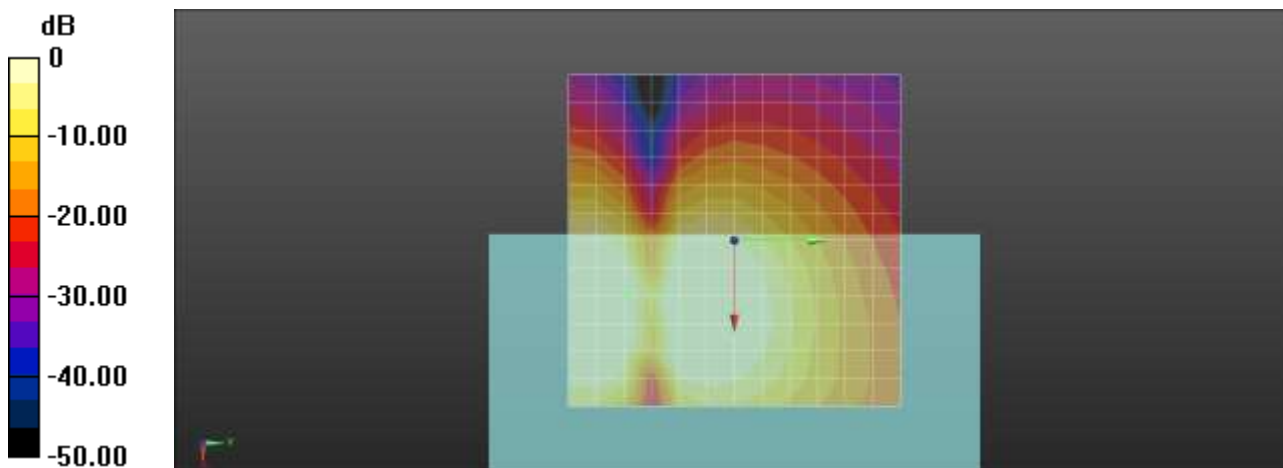

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.10**

**WCDMA Band 4 1412ch AMR WB 6\_6 z(axial)**

Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.96

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 5.01 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -16.7, 3.7 mm

**Cursor:**

ABM2 = -26.46 dBA/m

Location: 12.5, -16.7, 3.7 mm


**Cursor:**

ABM1/ABM2 = 31.47 dB

ABM1 comp = 5.01 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -16.7, 3.7 mm

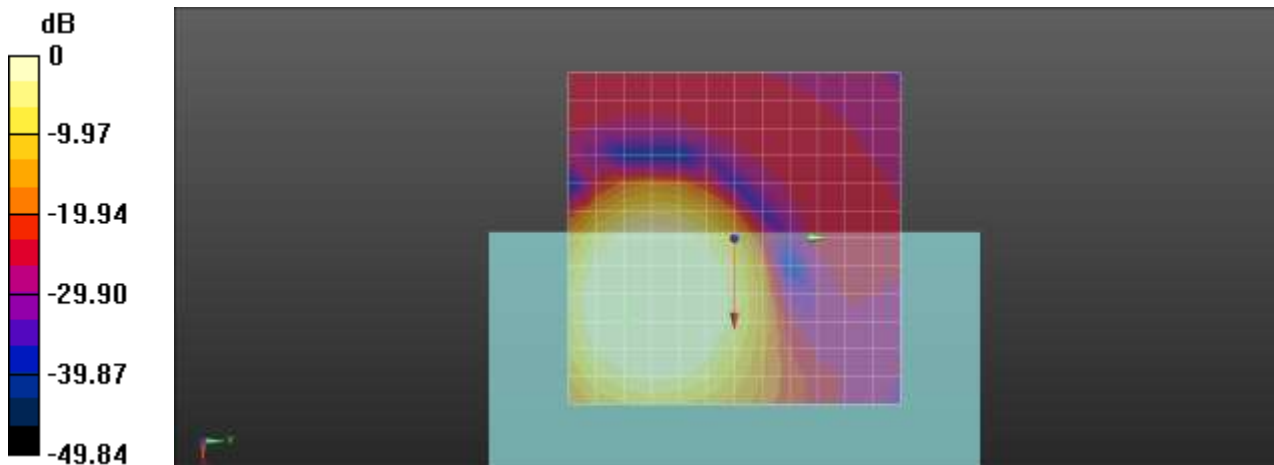

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.11**

**WCDMA Band 4 1412ch AMR WB 6\_6 Freq. Response**


Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 53.6  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.48 dB  
 BWC Factor = 9.47 dB  
 Location: 12.6, -16.7, 3.7 mm

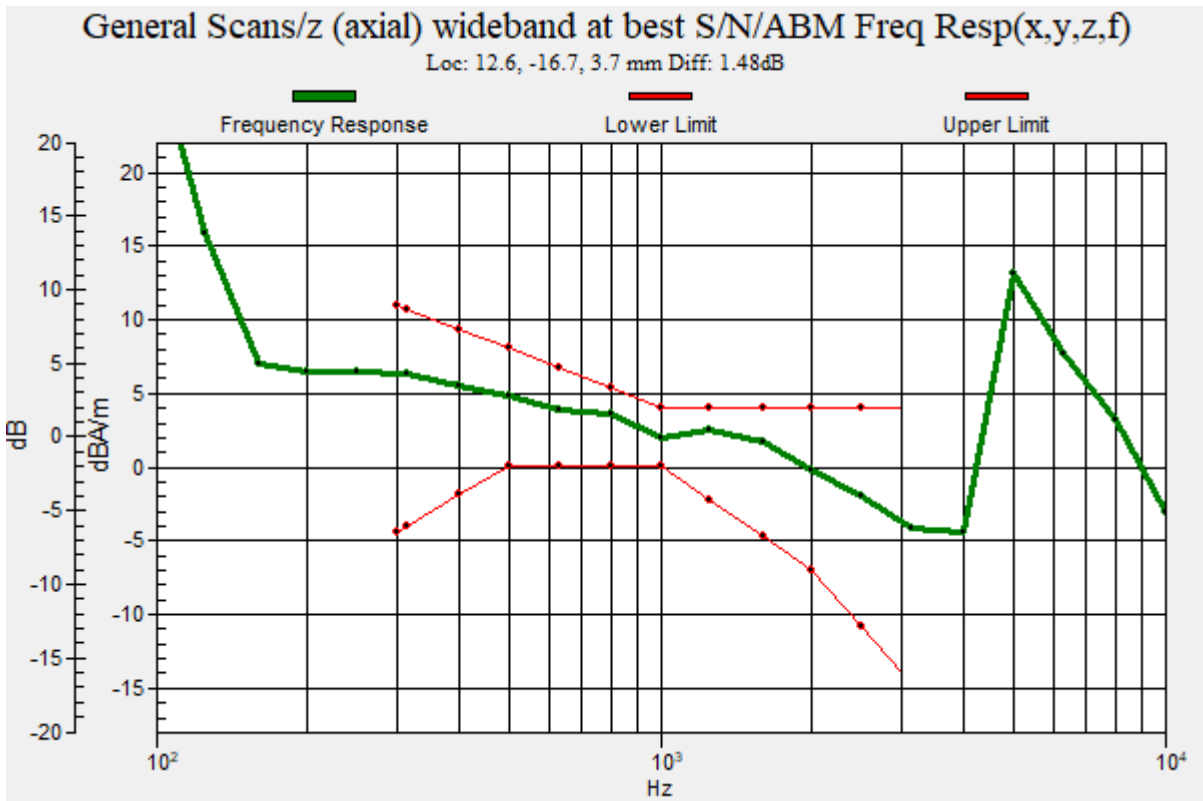

**Plot No.12**

**WCDMA Band 4 1412ch AMR WB 6\_6 y(transversal)**

Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.96

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -8.21 dBA/m

BWC Factor = 0.15 dB

Location: -4.2, 0, 3.7 mm

**Cursor:**

ABM2 = -39.48 dBA/m

Location: -4.2, 0, 3.7 mm


**Cursor:**

ABM1/ABM2 = 31.27 dB

ABM1 comp = -8.21 dBA/m

BWC Factor = 0.15 dB

Location: -4.2, 0, 3.7 mm

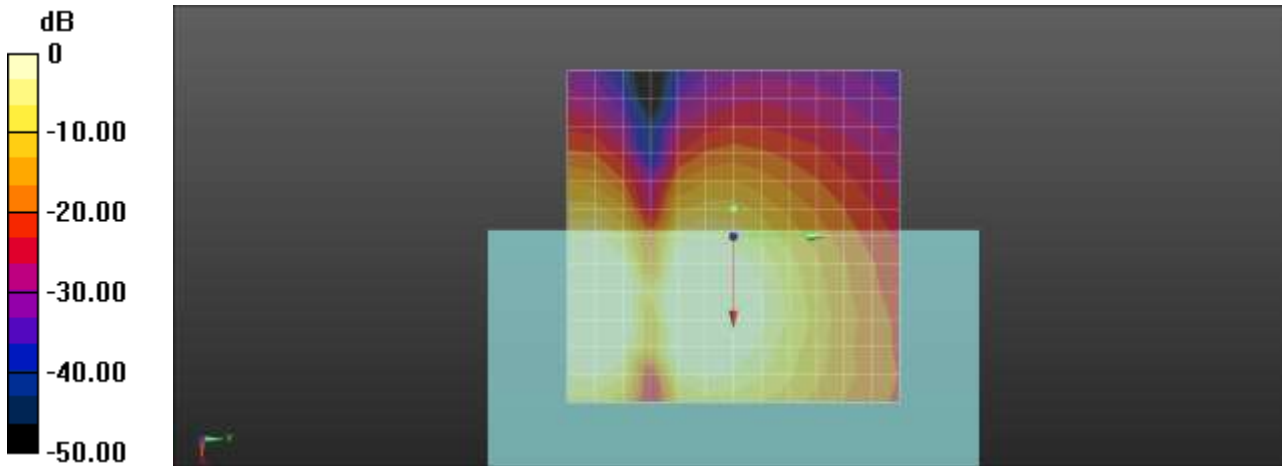

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.13**

**WCDMA Band 5 4183ch AMR WB 6\_6 z(axial)**

Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
 Output Gain: 24.96  
 Measure Window Start: 300ms  
 Measure Window Length: 1000ms  
 BWC applied: 0.15 dB  
 Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 6.18 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 12.5, -8.3, 3.7 mm

**Cursor:**

ABM2 = -25.16 dBA/m  
 Location: 12.5, -8.3, 3.7 mm

**Cursor:**

ABM1/ABM2 = 31.34 dB  
 ABM1 comp = 6.18 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 12.5, -8.3, 3.7 mm

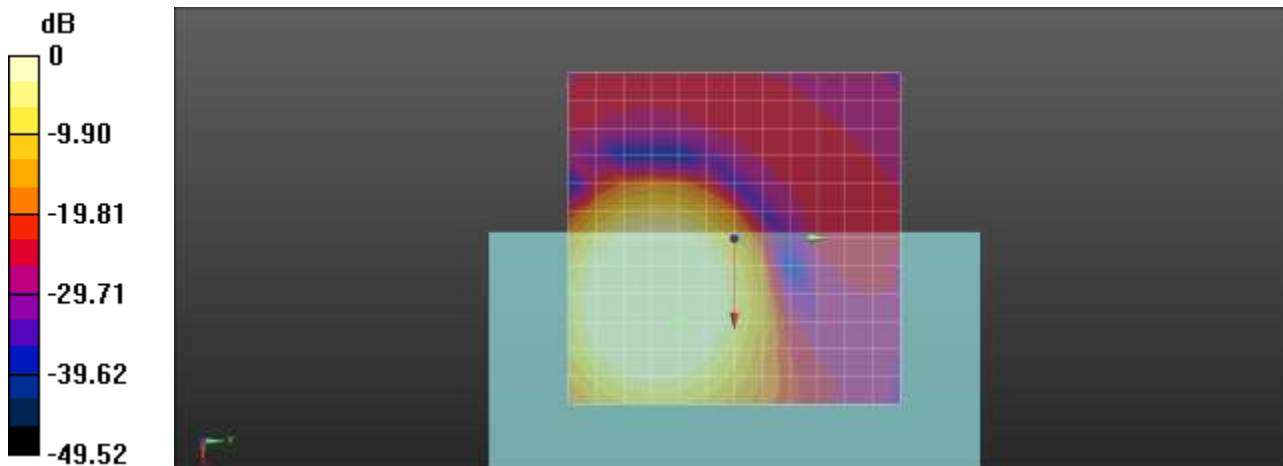

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.14**

**WCDMA Band 5 4183ch AMR WB 6\_6 Freq. Response**

Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav

Output Gain: 53.6

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.65 dB

BWC Factor = 9.47 dB

Location: 12.5, -8.4, 3.7 mm

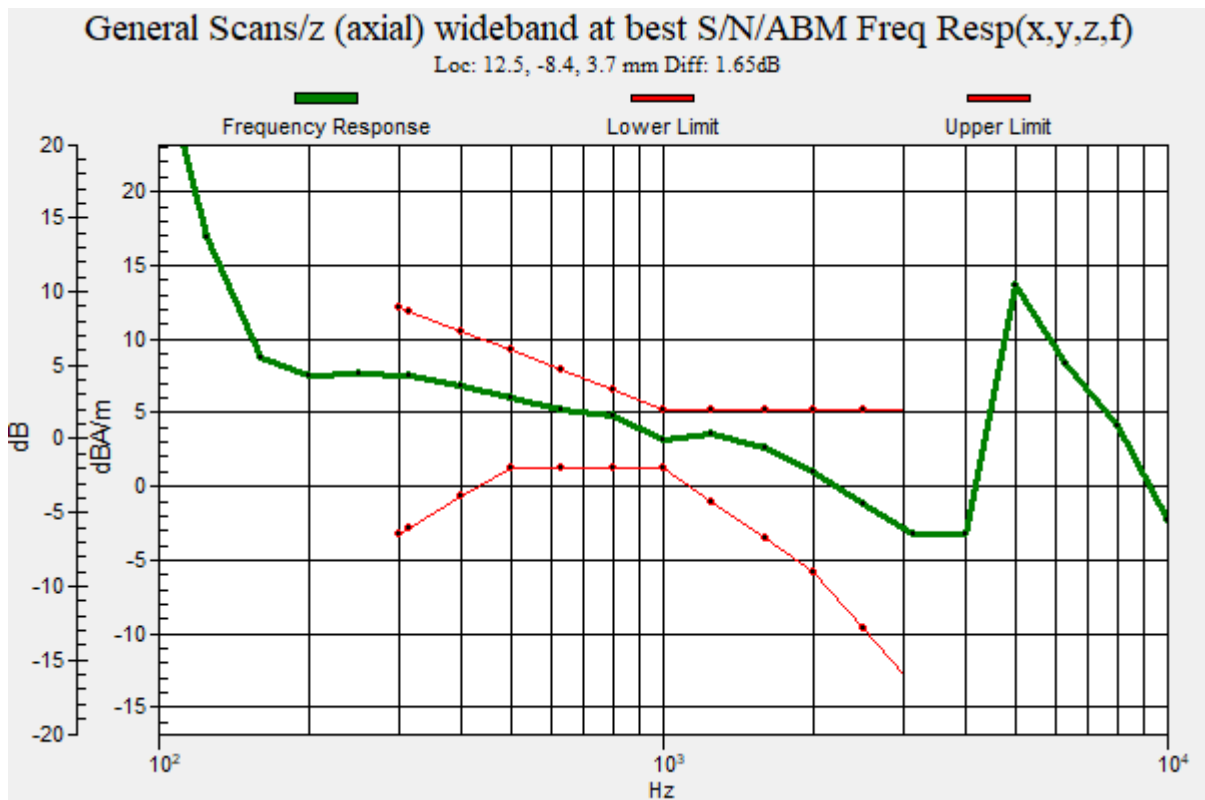

**Plot No.15**

**WCDMA Band 5 4183ch AMR WB 6\_6 y(transversal)**

Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.96

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 4.56 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -20.8, 3.7 mm

**Cursor:**

ABM2 = -26.83 dBA/m

Location: 12.5, -20.8, 3.7 mm


**Cursor:**

ABM1/ABM2 = 31.39 dB

ABM1 comp = 4.56 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -20.8, 3.7 mm

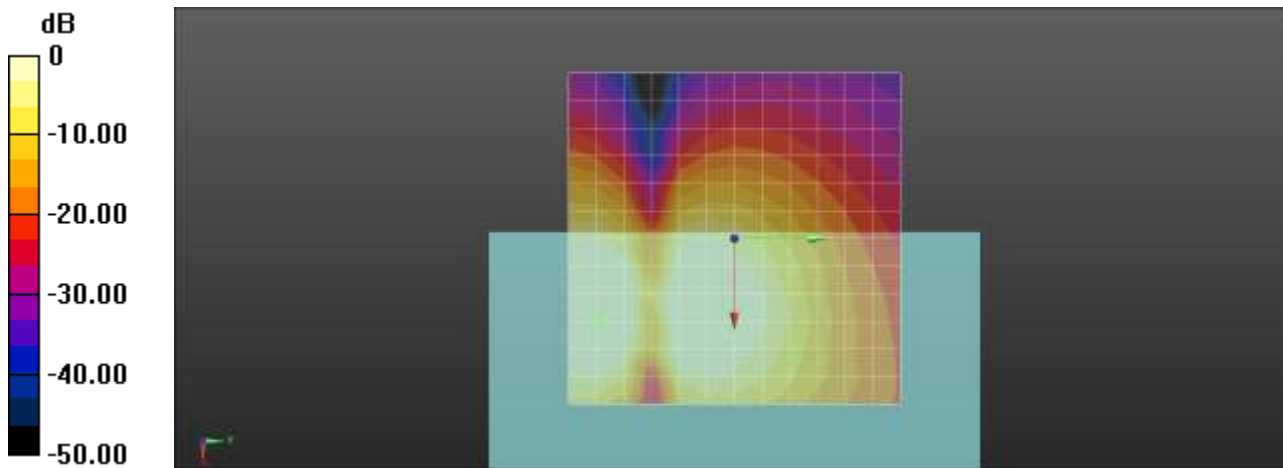

0 dB = 1.000 A/m = 0.00 dBA/m



**Plot No.16**  
**CDMA BC0 EVRC-B 1/1 384ch z(axial)**

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.6  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 2.68 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -44.84 dBA/m  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM1/ABM2 = 47.52 dB  
ABM1 comp = 2.68 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

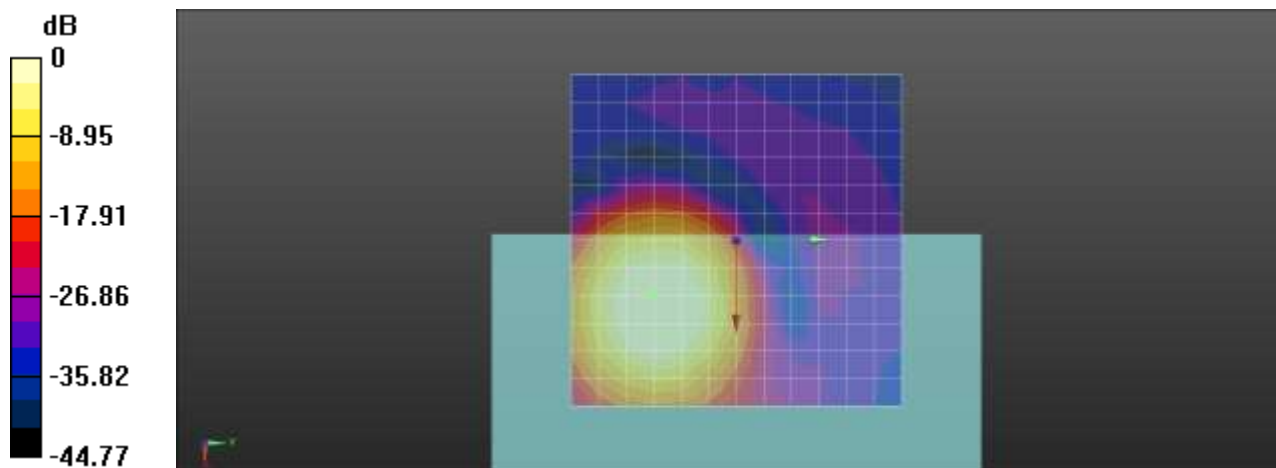

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.17**  
**CDMA BC0 EVRC-B 1/1 384ch Freq.Response**

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 53.07  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.60 dB  
BWC Factor = 9.47 dB  
Location: 8.7, -11.4, 3.7 mm

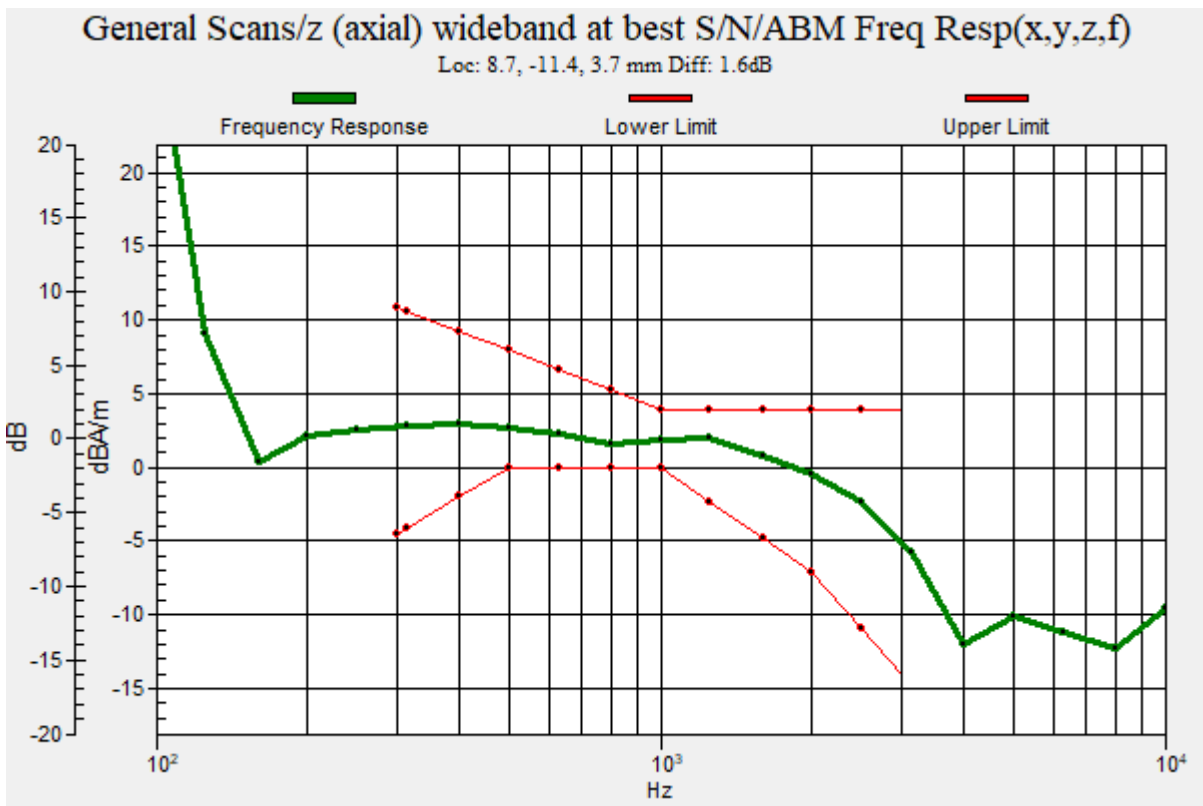

**Plot No.18**  
**CDMA BC0 EVRC-B 1/1 384ch y(transversal)**

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.6  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -7.82 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, 0, 3.7 mm

**Cursor:**

ABM2 = -51.61 dBA/m  
Location: 4.2, 0, 3.7 mm

**Cursor:**

ABM1/ABM2 = 43.79 dB  
ABM1 comp = -7.82 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, 0, 3.7 mm

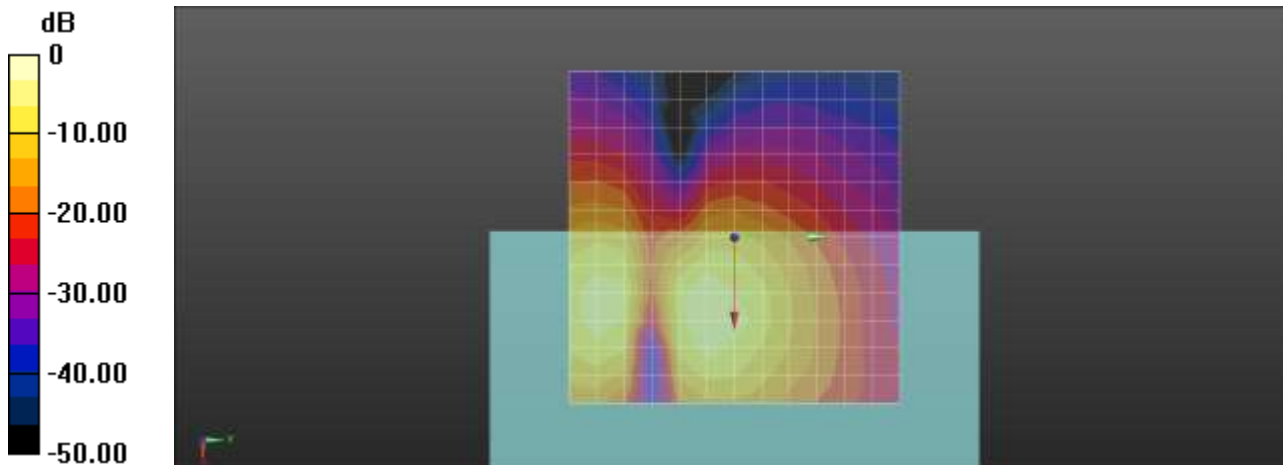

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.19**

**CDMA BC1 EVRC-B 1/1 600ch z(axial)**

Communication System: UID 0, CDMA BC1 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.6

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 0.34 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -16.7, 3.7 mm

**Cursor:**

ABM2 = -45.75 dBA/m

Location: 8.3, -16.7, 3.7 mm


**Cursor:**

ABM1/ABM2 = 46.09 dB

ABM1 comp = 0.34 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -16.7, 3.7 mm

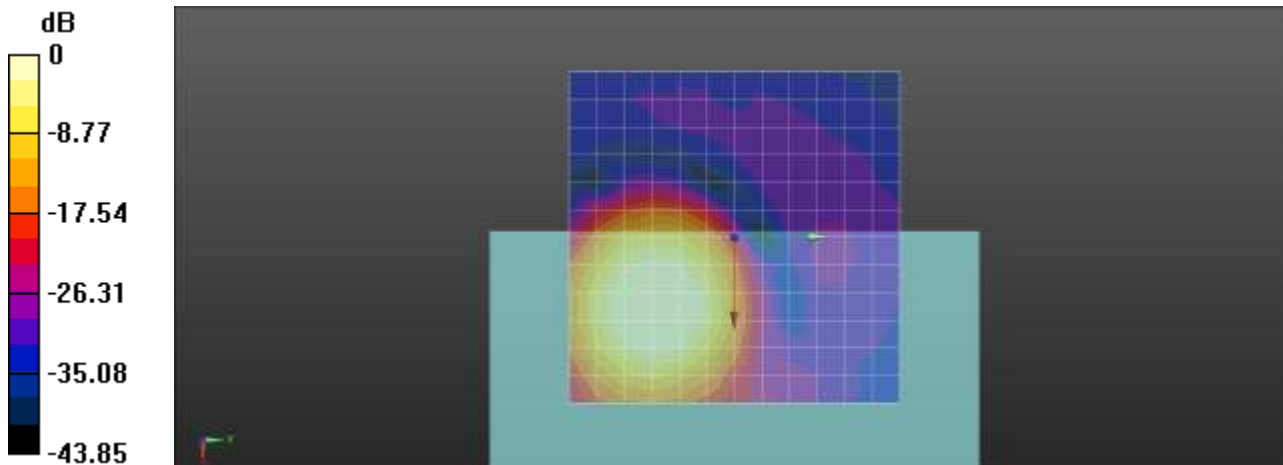

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.20**  
**CDMA BC1 EVRC-B 1/1 600ch Freq. Response**

Communication System: UID 0, CDMA BC1 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 53.07  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.43 dB  
BWC Factor = 9.47 dB  
Location: 8.5, -16.6, 3.7 mm

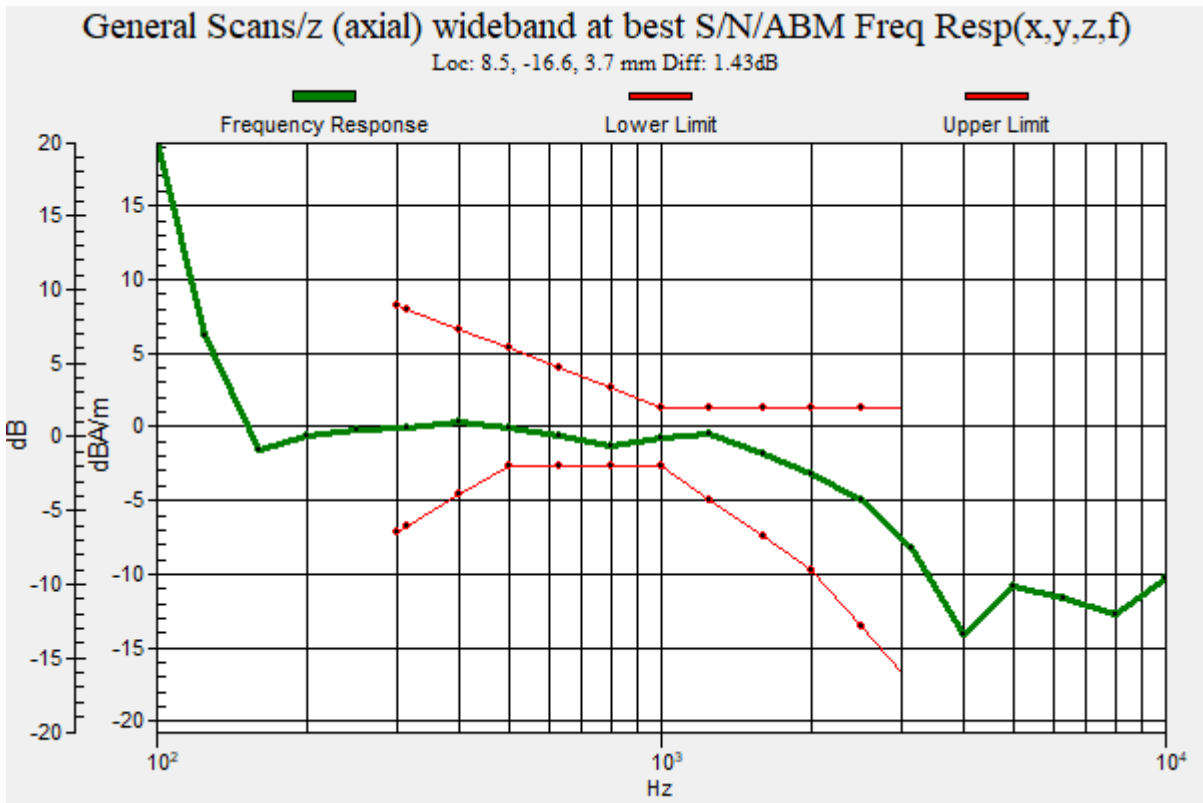

**Plot No.21**

**CDMA BC1 EVRC-B 1/1 600ch y(transversal)**

Communication System: UID 0, CDMA BC1 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.6  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -5.85 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, 0, 3.7 mm

**Cursor:**

ABM2 = -49.19 dBA/m  
Location: 8.3, 0, 3.7 mm

**Cursor:**

ABM1/ABM2 = 43.34 dB  
ABM1 comp = -5.85 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, 0, 3.7 mm

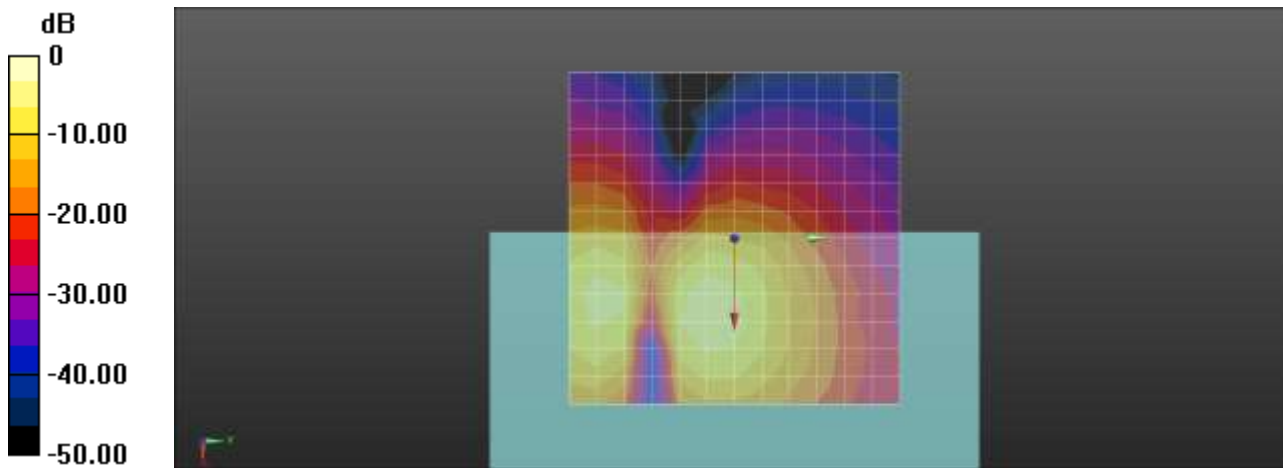

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.22**

**CDMA BC10 EVRC-B 3/3 670ch z(axial)**

Communication System: UID 0, BC10 (0); Frequency: 822.75 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.6  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 1.47 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -48.48 dBA/m  
Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM1/ABM2 = 49.95 dB  
ABM1 comp = 1.47 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -8.3, 3.7 mm

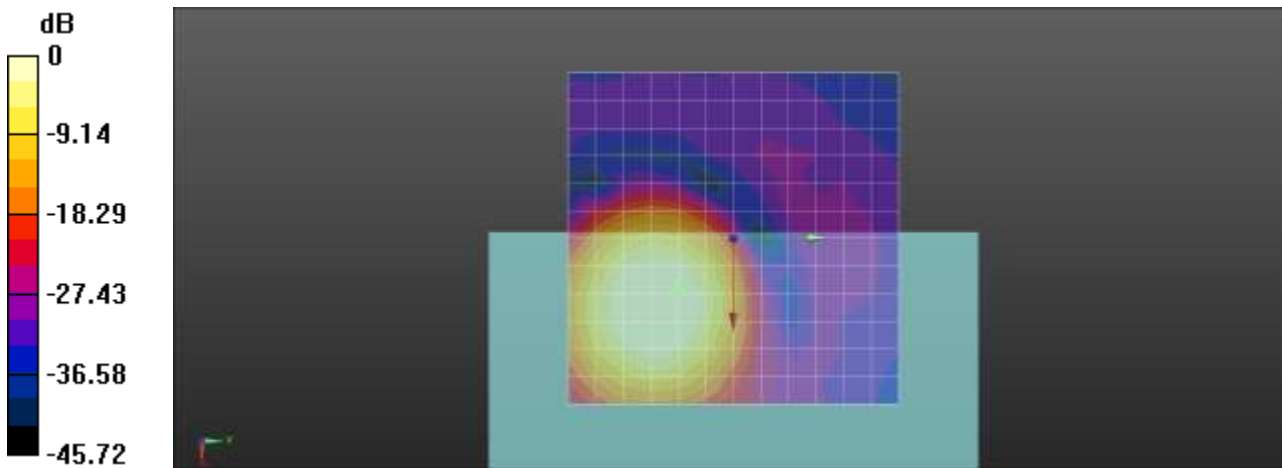

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.23**  
**CDMA BC10 EVRC-B 3/3 670ch Freq. Response**

Communication System: UID 0, BC10 (0); Frequency: 822.75 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 53.07  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.58 dB  
BWC Factor = 9.47 dB  
Location: 8.3, -8.2, 3.7 mm

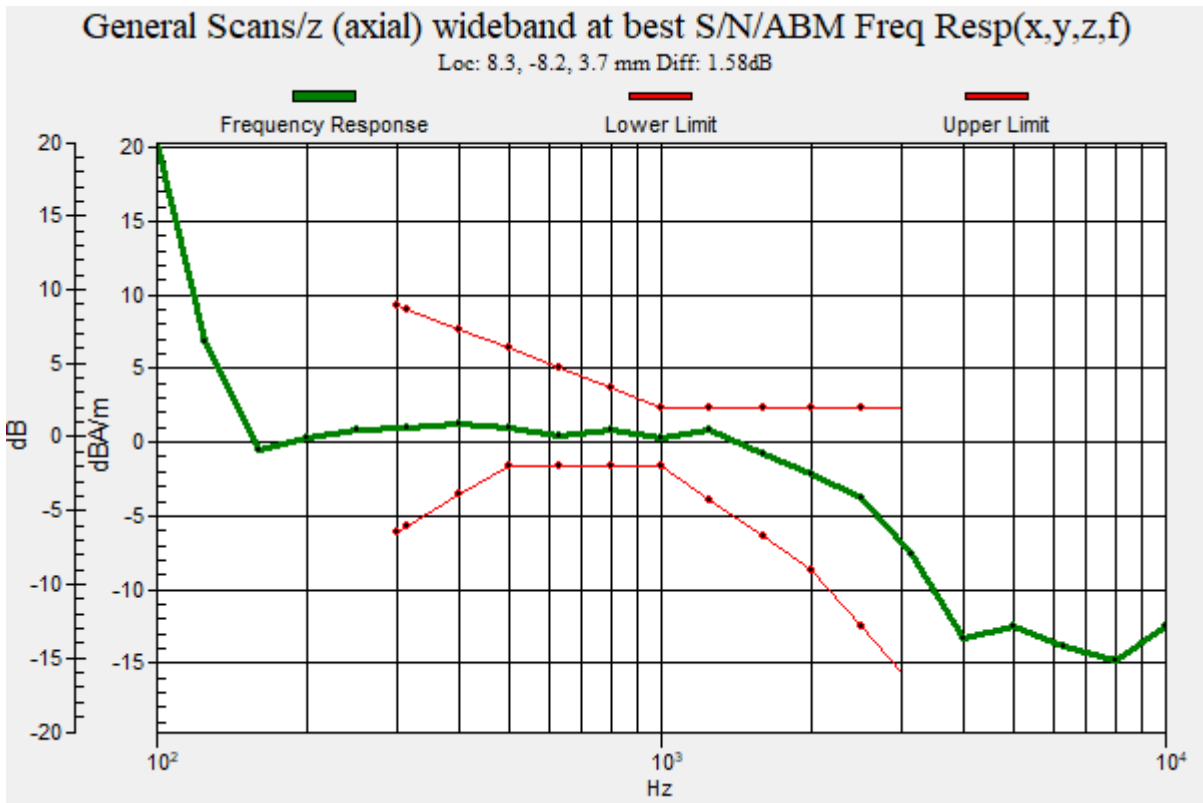



**Plot No.24**  
**CDMA BC10 EVRC-B 3/3 670ch y(transversal)**

Communication System: UID 0, BC10 (0); Frequency: 822.75 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.6  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -5.57 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, 0, 3.7 mm

**Cursor:**

ABM2 = -47.36 dBA/m  
Location: 8.3, 0, 3.7 mm

**Cursor:**

ABM1/ABM2 = 41.79 dB  
ABM1 comp = -5.57 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, 0, 3.7 mm

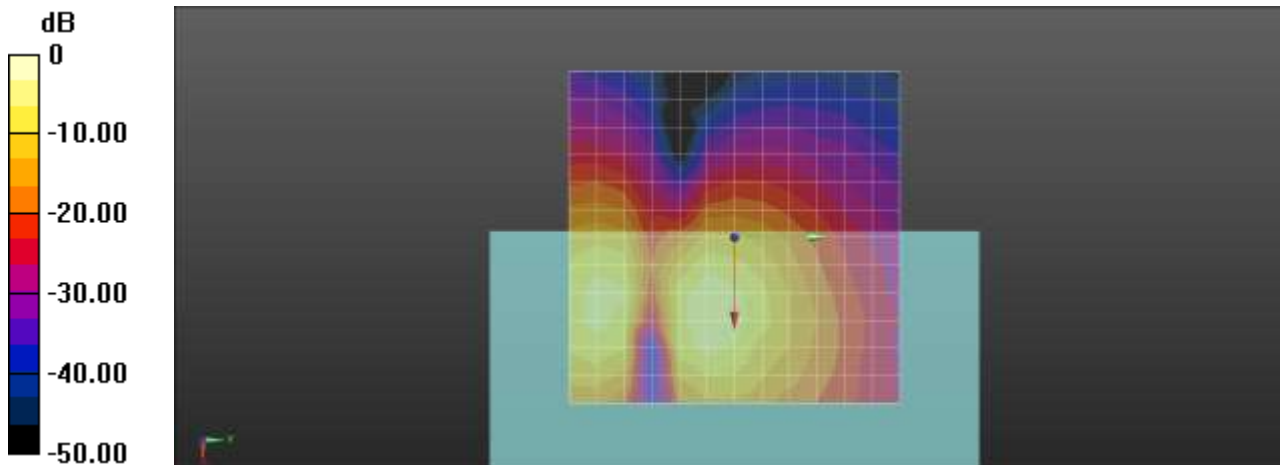

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.25**

**LTE 25 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 26365ch z(axial)**

Communication System: UID 0, LTE Band 25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -0.26 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -20.8, 3.7 mm

**Cursor:**

ABM2 = -30.63 dBA/m

Location: 8.3, -20.8, 3.7 mm


**Cursor:**

ABM1/ABM2 = 30.37 dB

ABM1 comp = -0.26 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -20.8, 3.7 mm

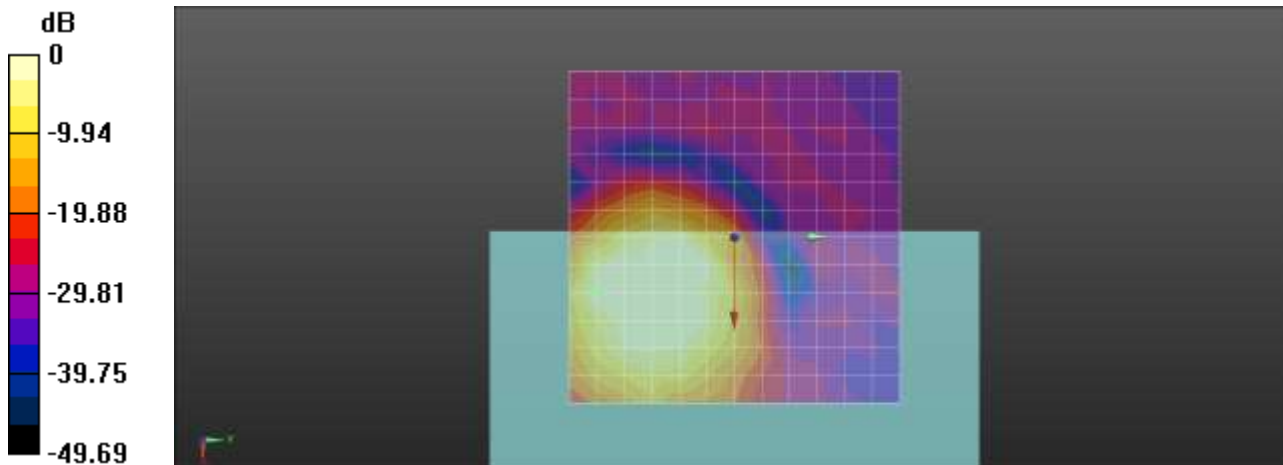

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.26**

**LTE 25 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 26365ch Freq.Response**

Communication System: UID 0, LTE Band 25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 53.58  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.71 dB  
 BWC Factor = 9.47 dB  
 Location: 7.5, -20.9, 3.7 mm

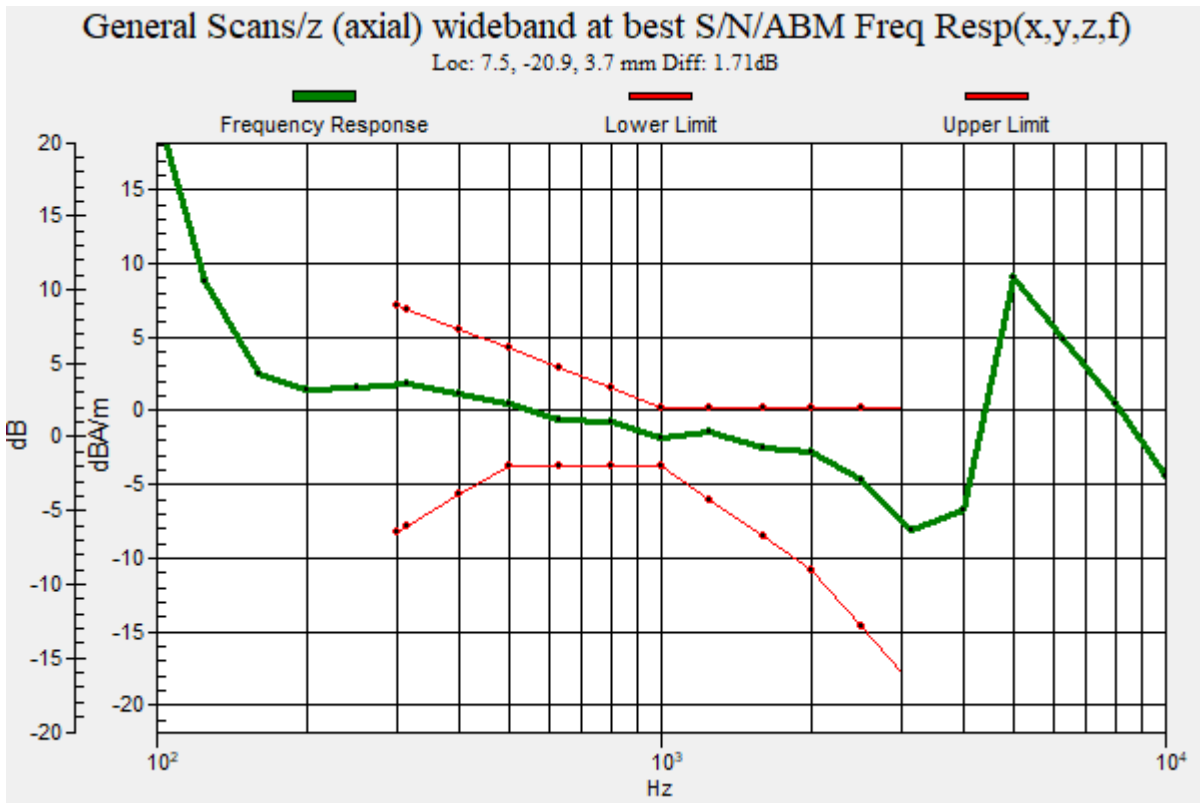

**Plot No.27**

**LTE 25 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 26365ch y(transversal)**

Communication System: UID 0, LTE Band 25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -2.47 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, 0, 3.7 mm

**Cursor:**

ABM2 = -32.78 dBA/m

Location: 4.2, 0, 3.7 mm


**Cursor:**

ABM1/ABM2 = 30.31 dB

ABM1 comp = -2.47 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, 0, 3.7 mm

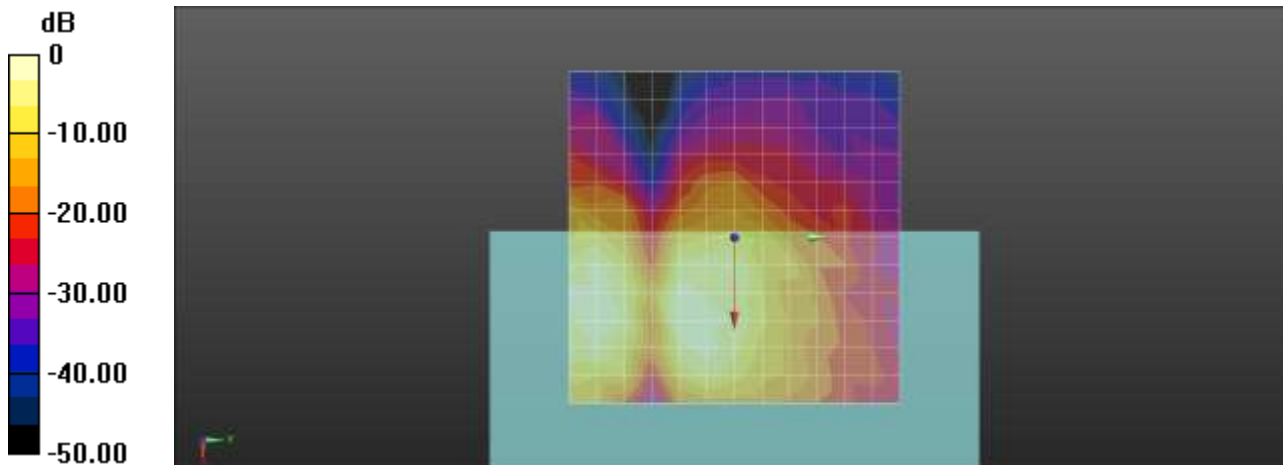

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.28**

**LTE 7 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 21100ch z(axial)**

Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 1.32 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -20.8, 3.7 mm

**Cursor:**

ABM2 = -31.67 dBA/m

Location: 12.5, -20.8, 3.7 mm


**Cursor:**

ABM1/ABM2 = 32.98 dB

ABM1 comp = 1.32 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -20.8, 3.7 mm

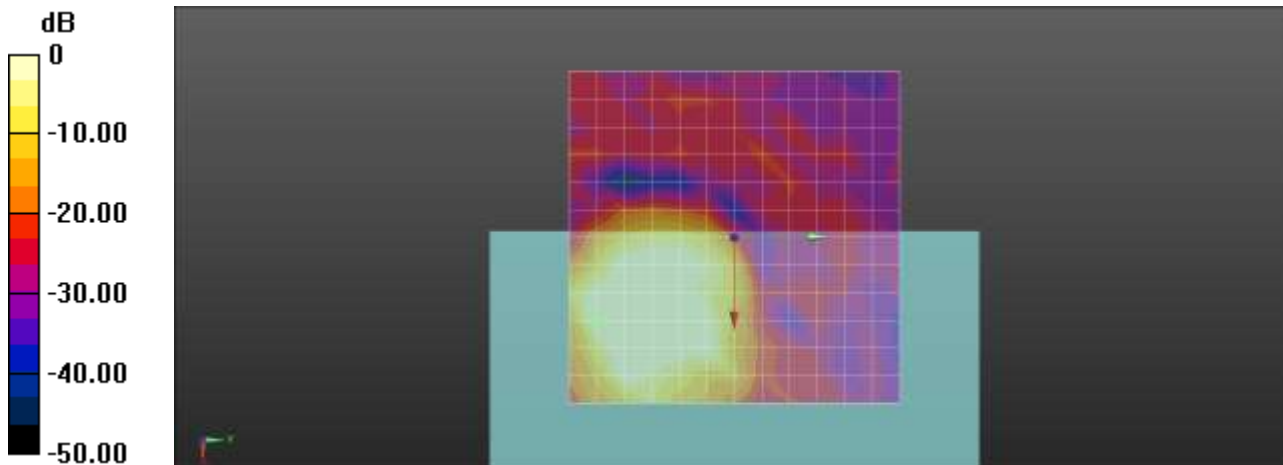

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.29**

**LTE 7 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 21100ch Freq.Response**

Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 53.58  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.54 dB  
 BWC Factor = 9.47 dB  
 Location: 12, -20.7, 3.7 mm

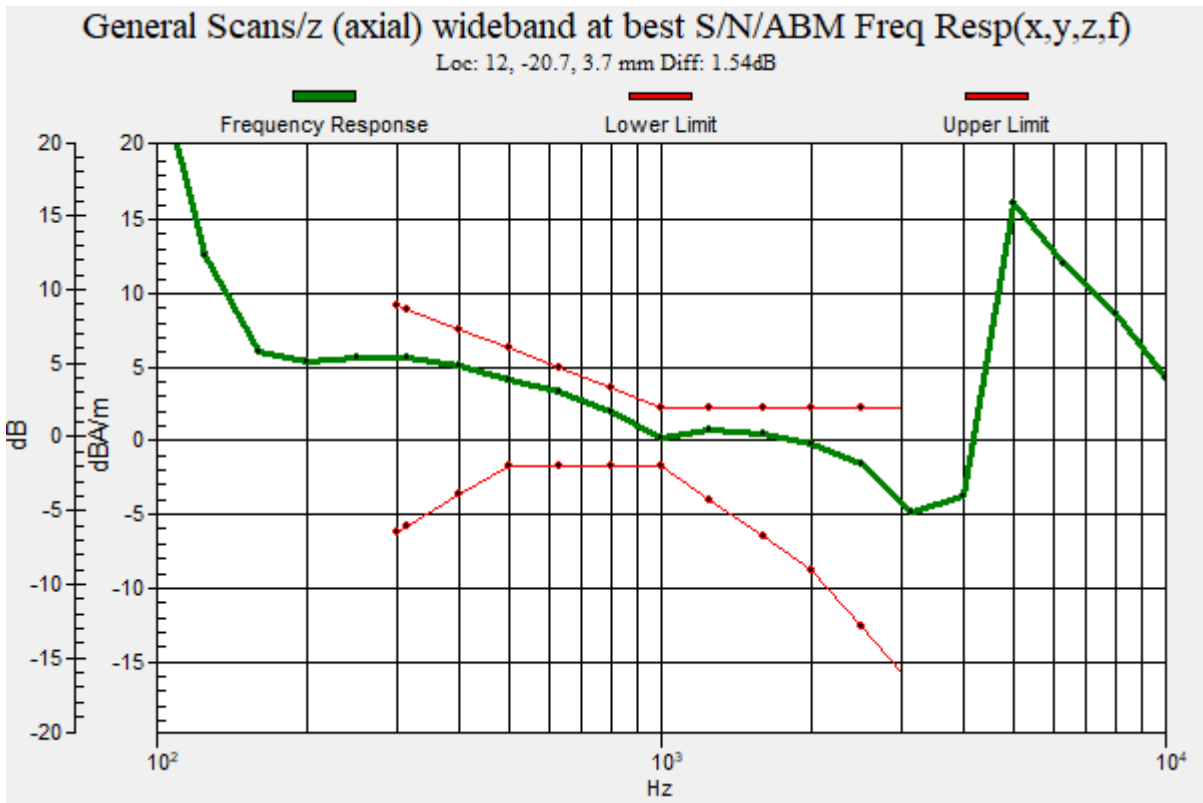

**Plot No.30**

**LTE 7 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 21100ch y(transversal)**

Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
 Output Gain: 24.93  
 Measure Window Start: 300ms  
 Measure Window Length: 1000ms  
 BWC applied: 0.15 dB  
 Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -0.16 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 4.2, -20.8, 3.7 mm

**Cursor:**

ABM2 = -34.03 dBA/m  
 Location: 4.2, -20.8, 3.7 mm

**Cursor:**

ABM1/ABM2 = 33.87 dB  
 ABM1 comp = -0.16 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 4.2, -20.8, 3.7 mm

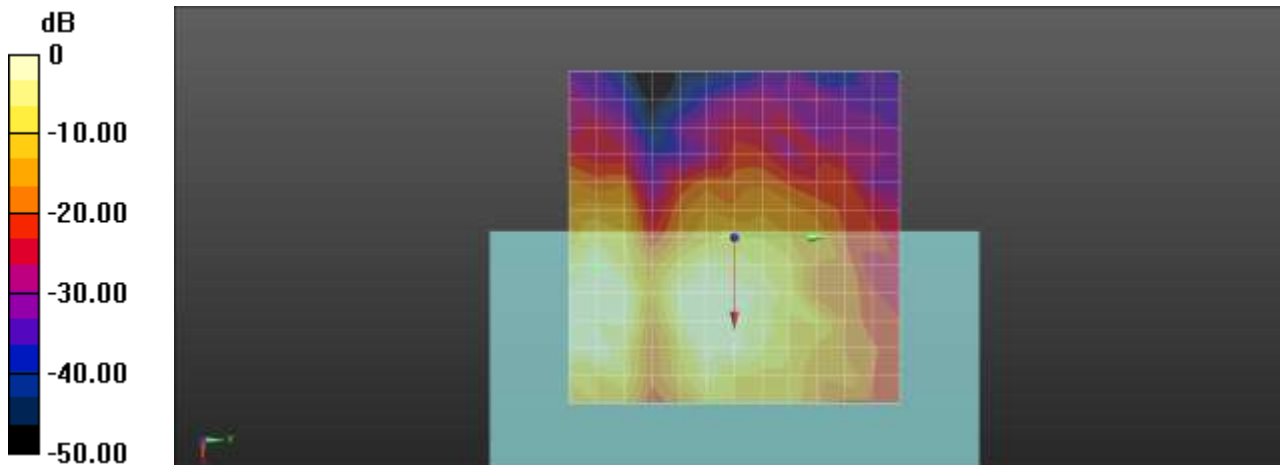

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.31**

**LTE 12 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 23095ch z(axial)**

Communication System: UID 0, LTE Band12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 8.80 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -25.57 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 34.37 dB

ABM1 comp = 8.80 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

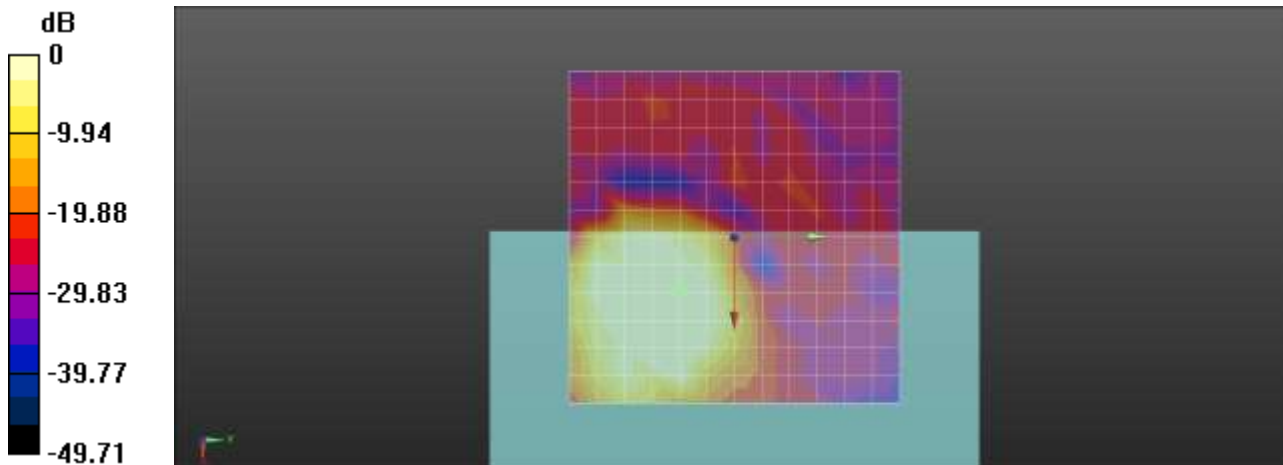

0 dB = 1.000 A/m = 0.00 dBA/m



**Plot No.32**

**LTE 12 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 23095ch Freq.Response**


Communication System: UID 0, LTE Band12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 53.58  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.46 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.60 dB  
 BWC Factor = 9.46 dB  
 Location: 8.5, -8.1, 3.7 mm

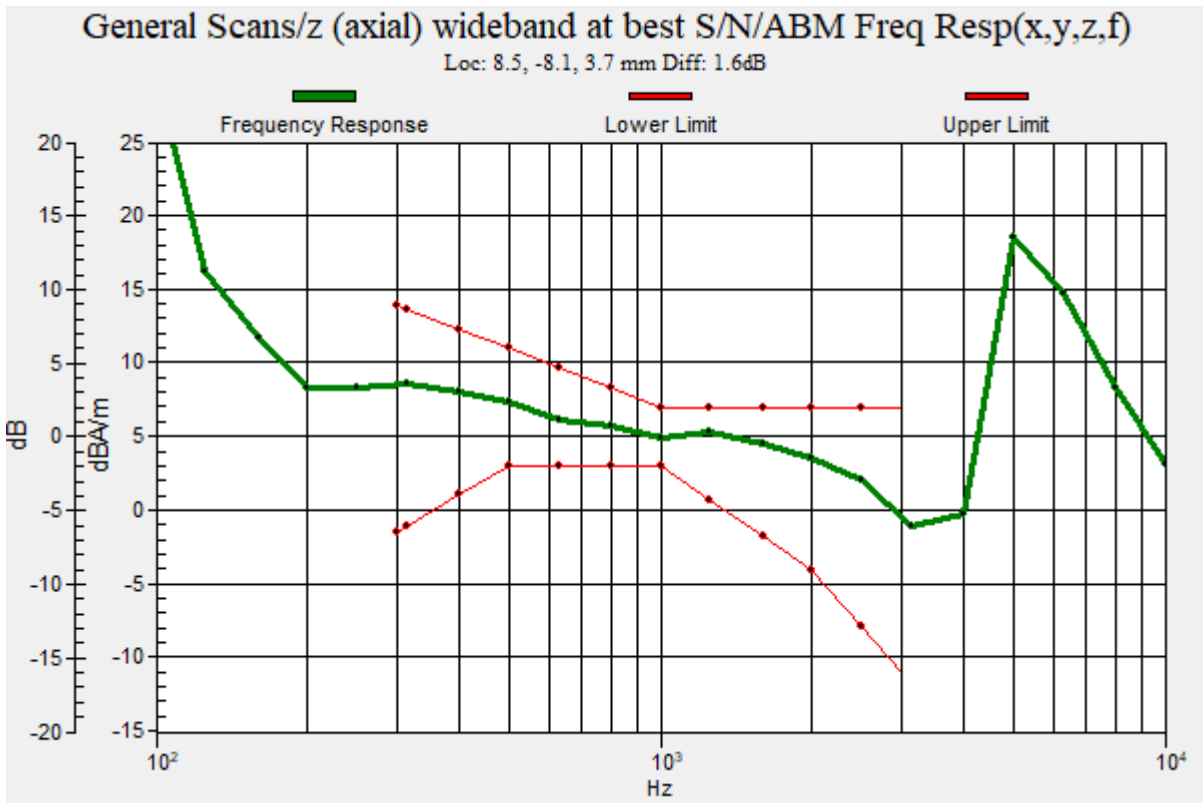

**Plot No.33**

**LTE 12 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 23095ch y(transversal)**

Communication System: UID 0, LTE Band12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -0.31 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, 0, 3.7 mm

**Cursor:**

ABM2 = -34.46 dBA/m

Location: 4.2, 0, 3.7 mm


**Cursor:**

ABM1/ABM2 = 34.15 dB

ABM1 comp = -0.31 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, 0, 3.7 mm

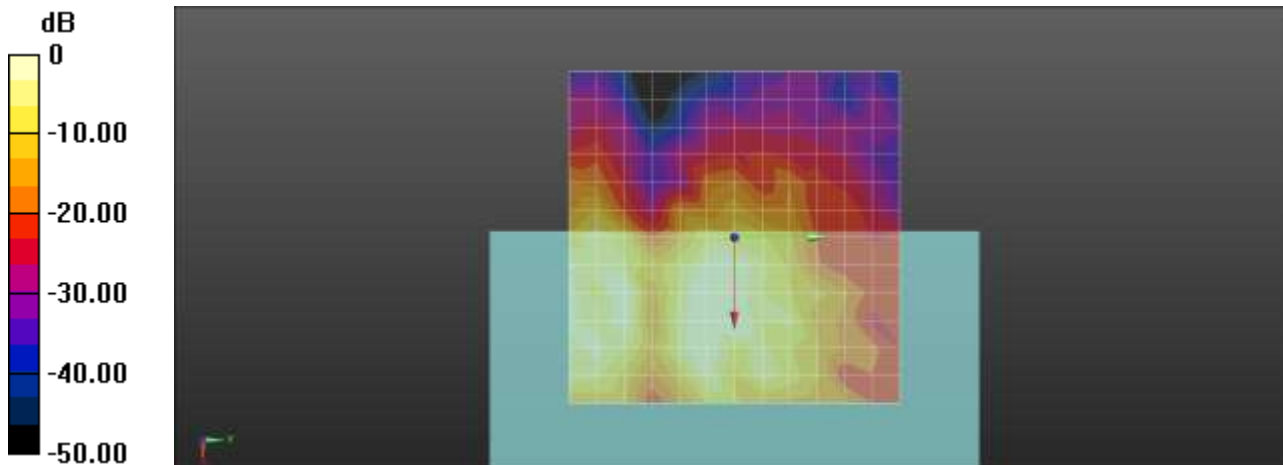

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.34**

**LTE 13 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 23230ch z(axial)**

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 11.40 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -12.5, 3.7 mm

**Cursor:**

ABM2 = -22.80 dBA/m

Location: 12.5, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 34.21 dB

ABM1 comp = 11.40 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -12.5, 3.7 mm

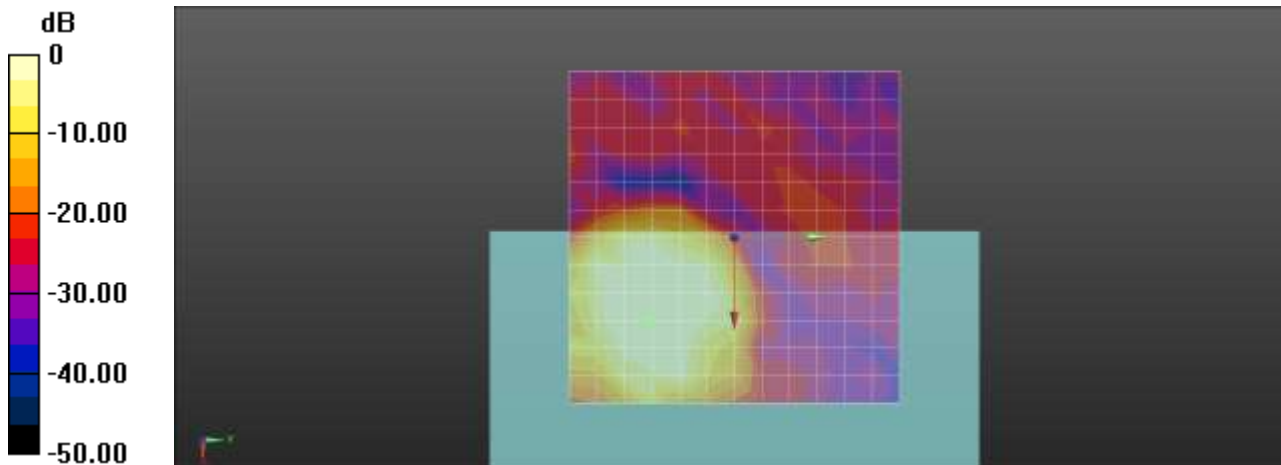

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.35**

**LTE 13 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 23230ch Freq.Response**

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 53.58  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.33 dB  
 BWC Factor = 9.47 dB  
 Location: 12.9, -12.6, 3.7 mm

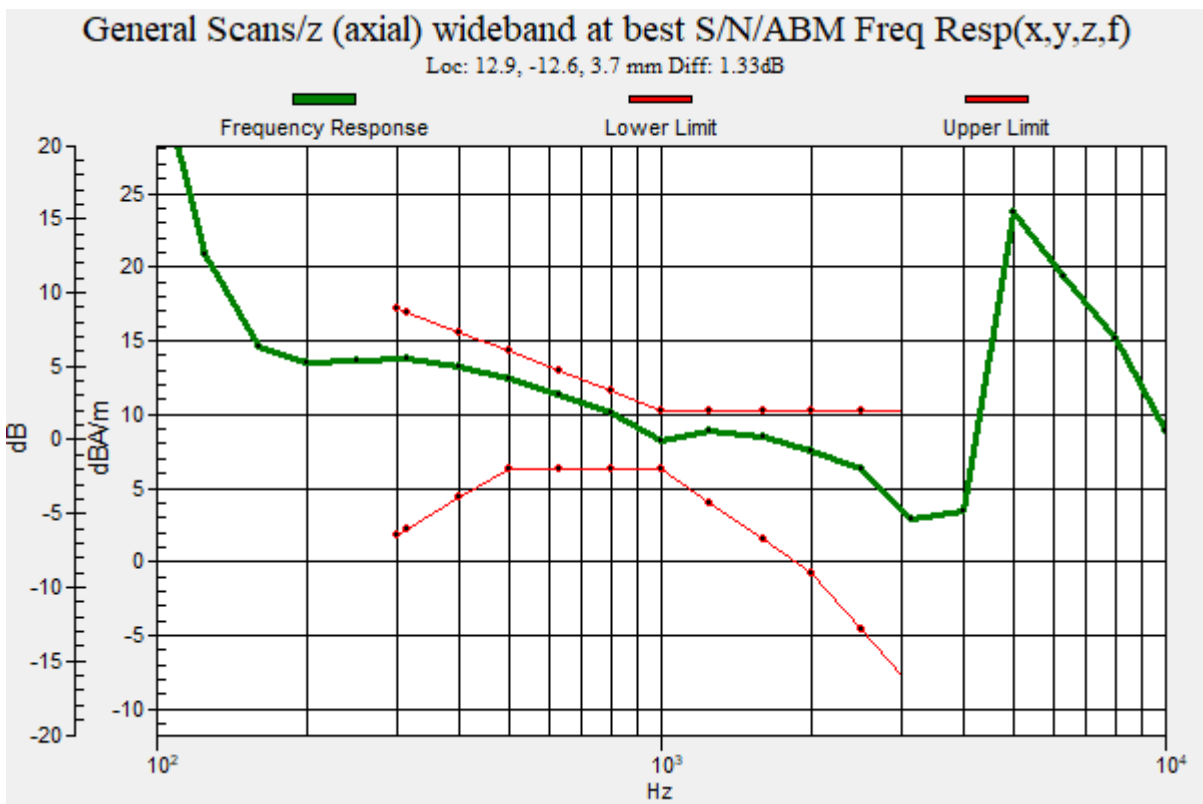

**Plot No.36**

**LTE 13 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 23230ch y(transversal)**

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
 Output Gain: 24.93  
 Measure Window Start: 300ms  
 Measure Window Length: 1000ms  
 BWC applied: 0.15 dB  
 Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -4.29 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 0, 0, 3.7 mm

**Cursor:**

ABM2 = -37.96 dBA/m  
 Location: 0, 0, 3.7 mm

**Cursor:**

ABM1/ABM2 = 33.67 dB  
 ABM1 comp = -4.29 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 0, 0, 3.7 mm

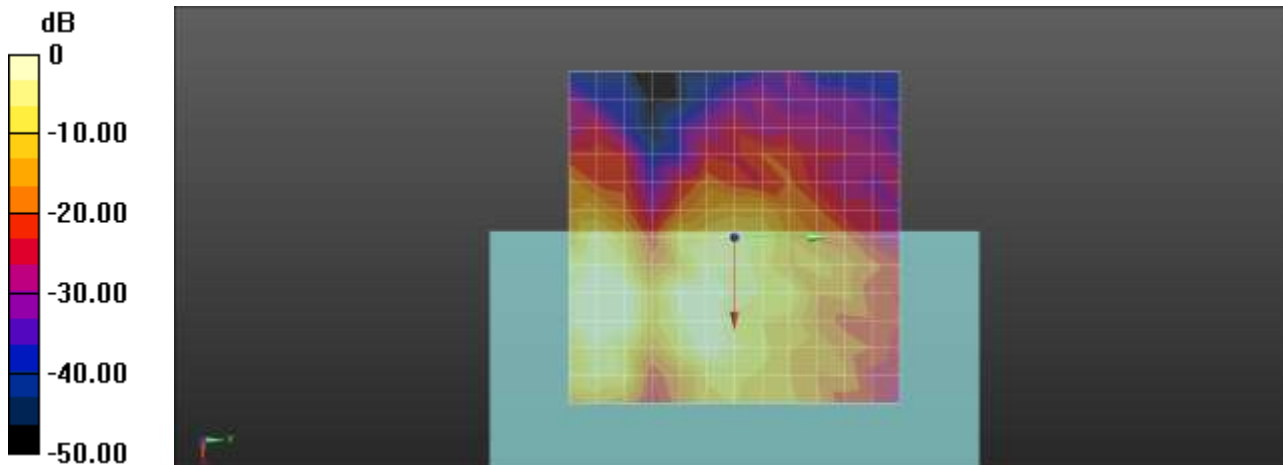

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.37**

**LTE 14 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 23330ch z(axial)**

Communication System: UID 0, LTE Band 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -2.80 dBA/m

BWC Factor = 0.15 dB

Location: 0, -16.7, 3.7 mm

**Cursor:**

ABM2 = -35.50 dBA/m

Location: 0, -16.7, 3.7 mm


**Cursor:**

ABM1/ABM2 = 32.70 dB

ABM1 comp = -2.80 dBA/m

BWC Factor = 0.15 dB

Location: 0, -16.7, 3.7 mm

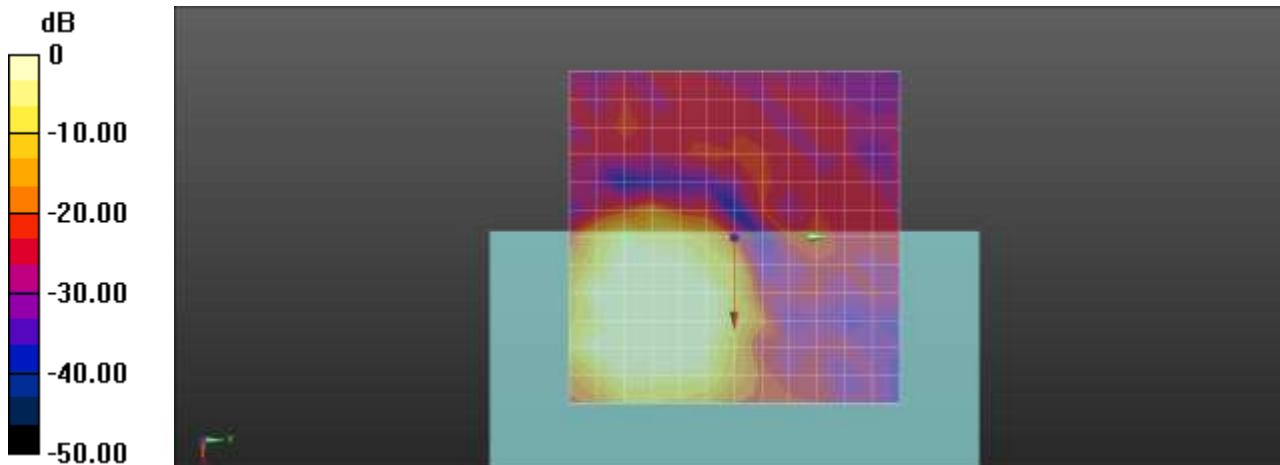

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.38**

**LTE 14 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 23330ch Freq.Response**

Communication System: UID 0, LTE Band 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 53.58  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.61 dB  
 BWC Factor = 9.47 dB  
 Location: 0.4, -16.8, 3.7 mm

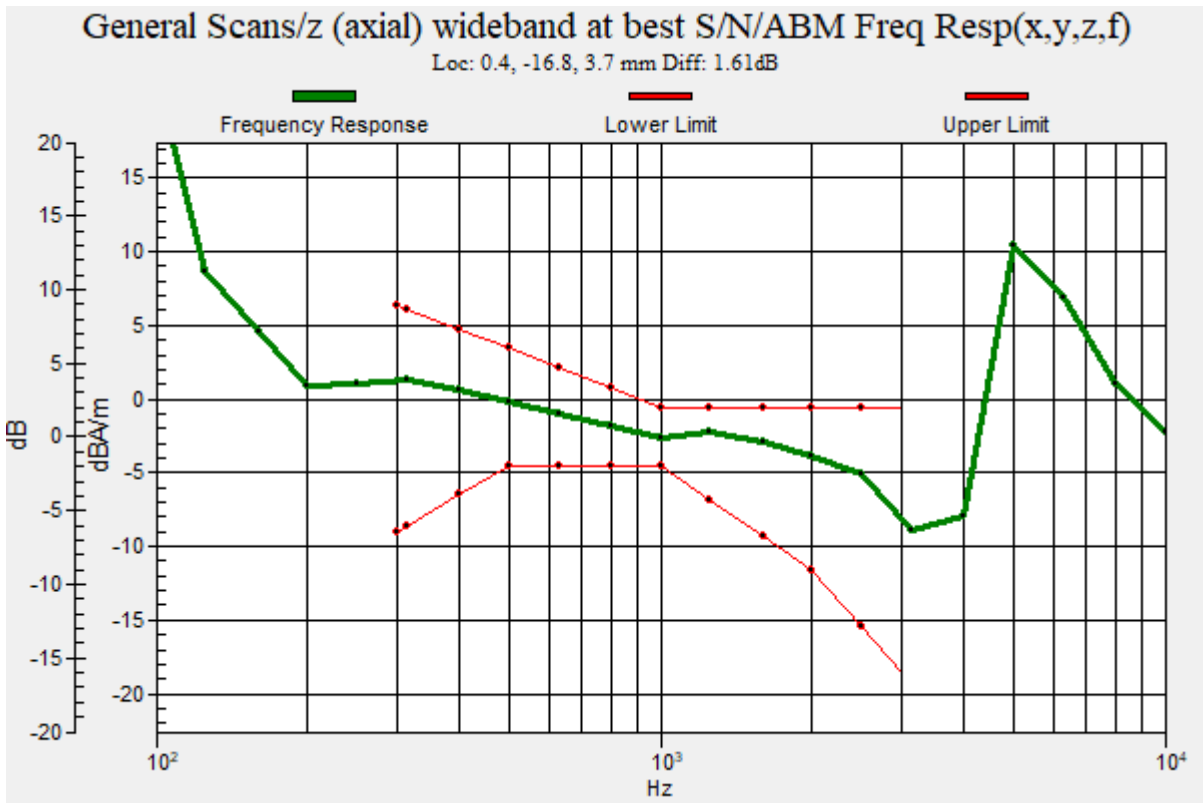

**Plot No.39**

**LTE 14 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 23330ch y(transversal)**

Communication System: UID 0, LTE Band 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 2.89 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -4.2, 3.7 mm

**Cursor:**

ABM2 = -30.87 dBA/m

Location: 8.3, -4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 33.77 dB

ABM1 comp = 2.89 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -4.2, 3.7 mm

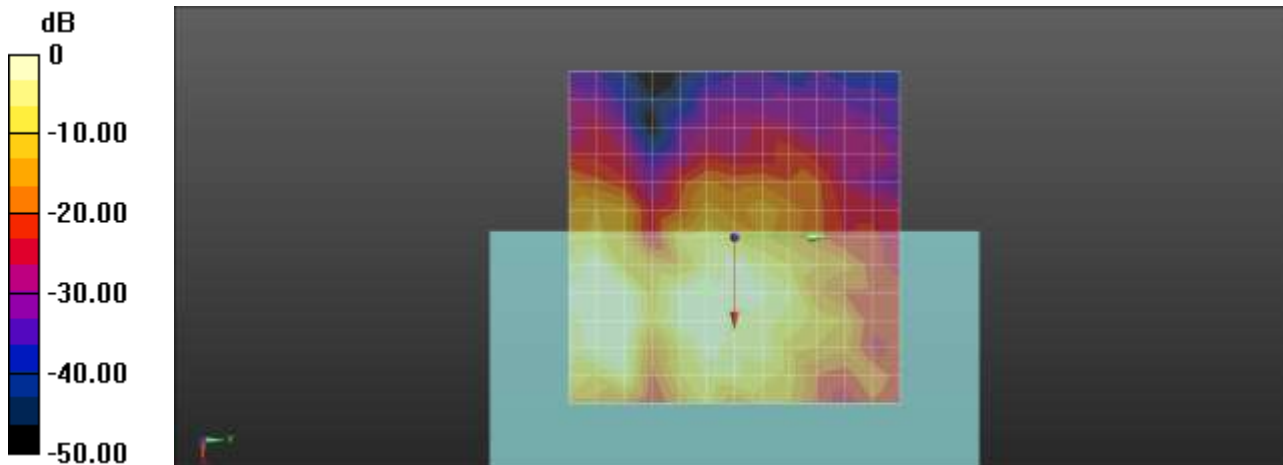

0 dB = 1.000 A/m = 0.00 dBA/m



**Plot No.40**

**LTE 26 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 26865ch z(axial)**

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -0.32 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -4.2, 3.7 mm

**Cursor:**

ABM2 = -34.62 dBA/m

Location: 4.2, -4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 34.30 dB

ABM1 comp = -0.32 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -4.2, 3.7 mm

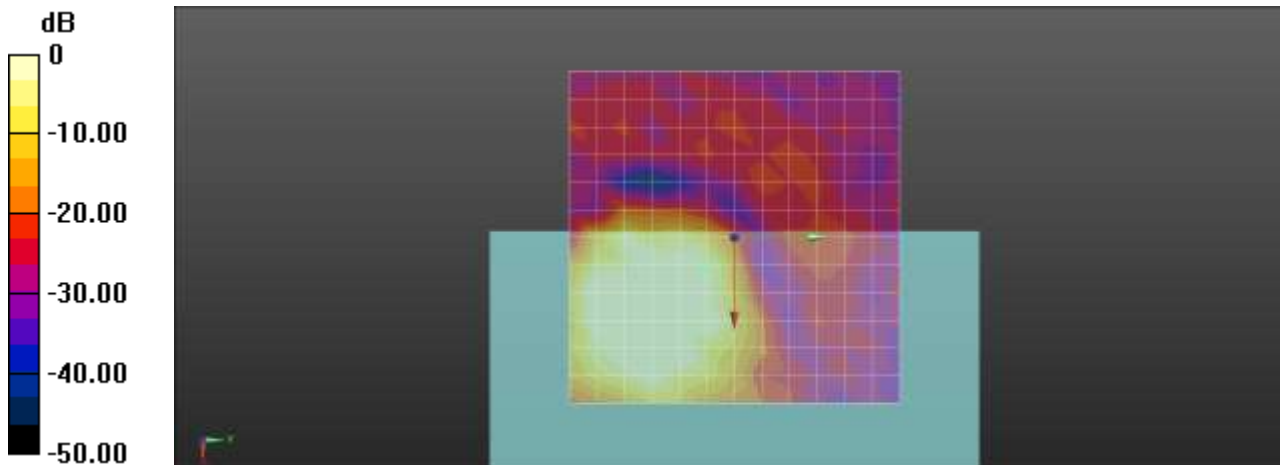

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.41**

**LTE 26 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset Freq.Response**


Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 53.58  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.46 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.58 dB  
BWC Factor = 9.46 dB  
Location: 4, -4, 3.7 mm

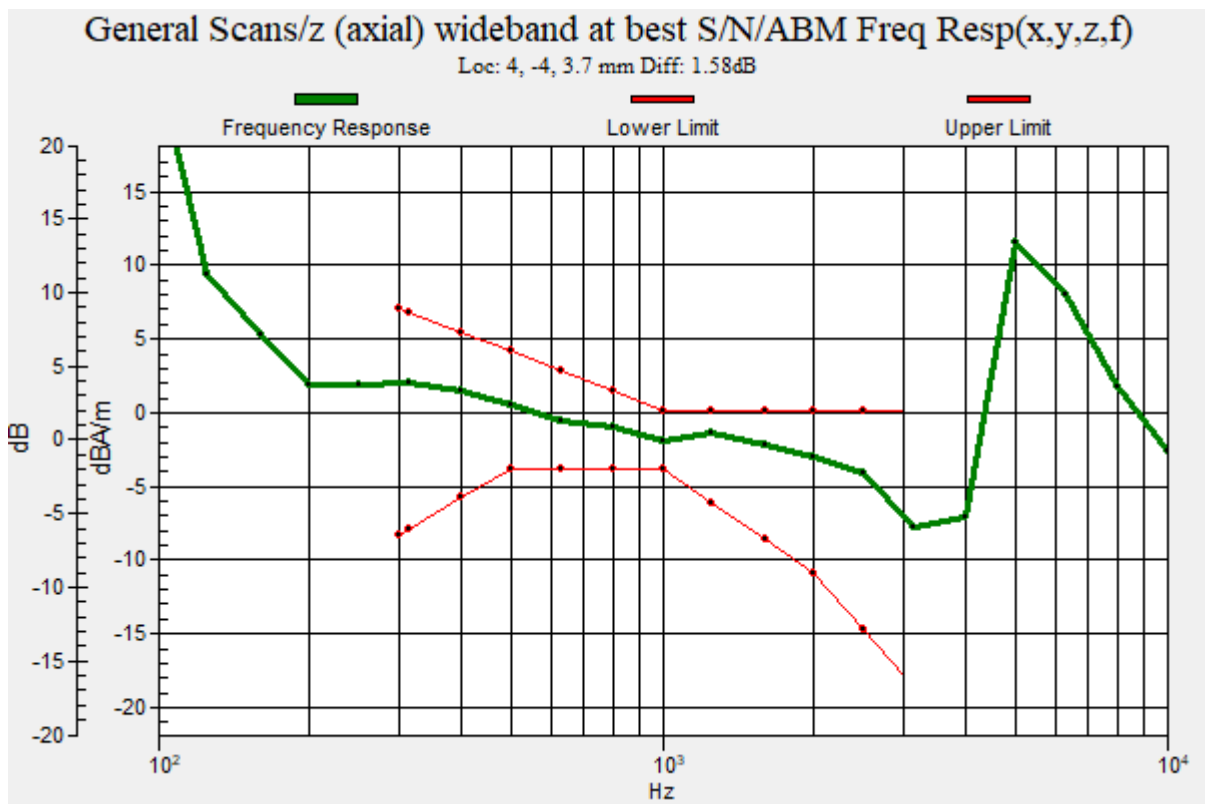

**Plot No.42**

**LTE 26 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 26865ch y(transversal)**

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 1.39 dBA/m

BWC Factor = 0.15 dB

Location: 16.7, -4.2, 3.7 mm

**Cursor:**

ABM2 = -32.37 dBA/m

Location: 16.7, -4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 33.76 dB

ABM1 comp = 1.39 dBA/m

BWC Factor = 0.15 dB

Location: 16.7, -4.2, 3.7 mm

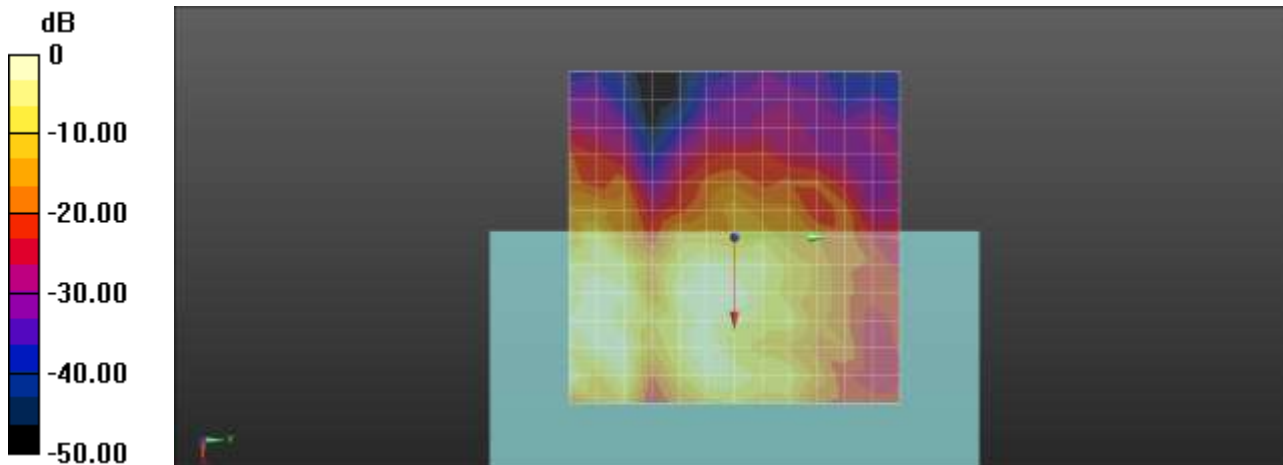

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.43**

**LTE 30 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 27710ch z(axial)**

Communication System: UID 0, LTE Band30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 10.62 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -23.19 dBA/m

Location: 8.3, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 33.81 dB

ABM1 comp = 10.62 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

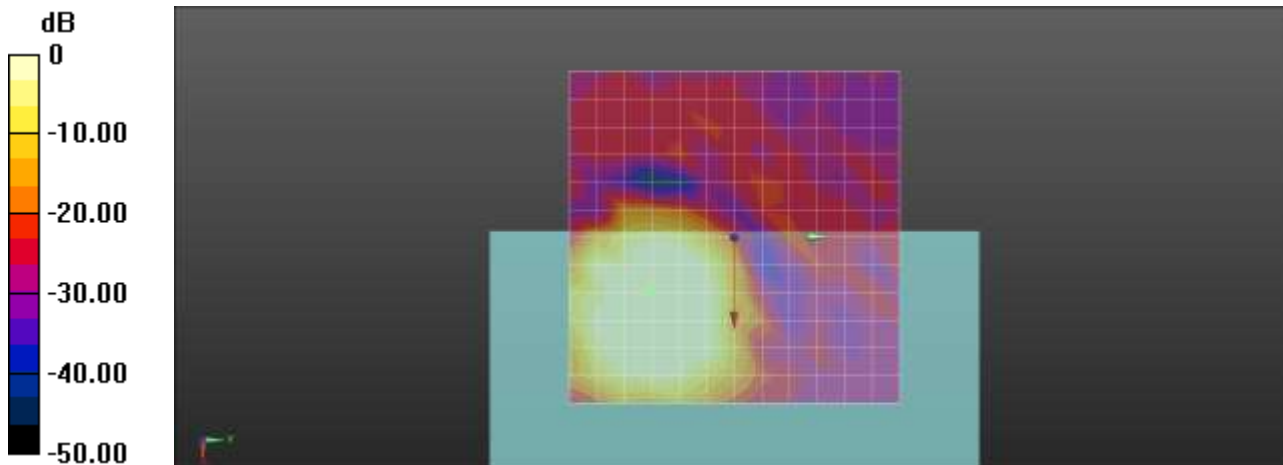

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.44**

**LTE 30 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 27710ch Freq.Response**

Communication System: UID 0, LTE Band30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 53.58  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.46 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.50 dB  
 BWC Factor = 9.46 dB  
 Location: 10.3, -12.4, 3.7 mm

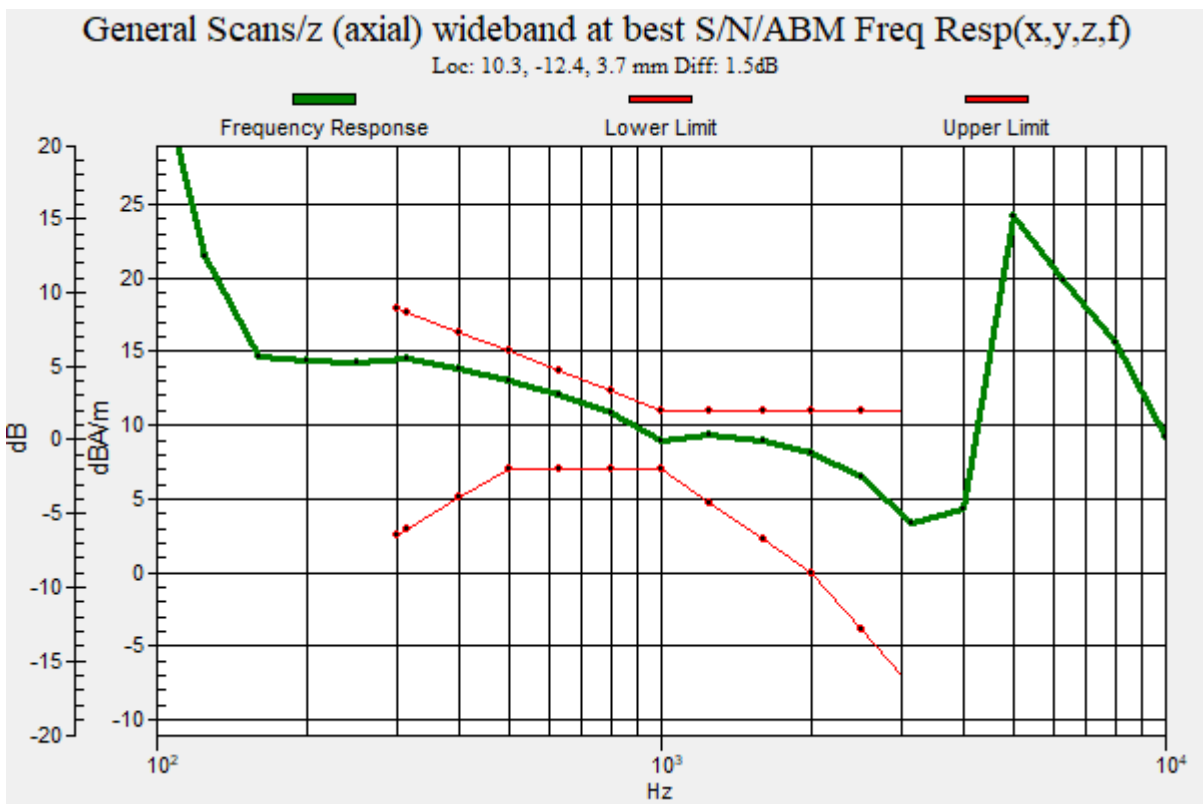

**Plot No.45**

**LTE 30 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 27710ch y(transversal)**

Communication System: UID 0, LTE Band30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 1.27 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, 0, 3.7 mm

**Cursor:**

ABM2 = -31.64 dBA/m

Location: 12.5, 0, 3.7 mm


**Cursor:**

ABM1/ABM2 = 32.92 dB

ABM1 comp = 1.27 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, 0, 3.7 mm

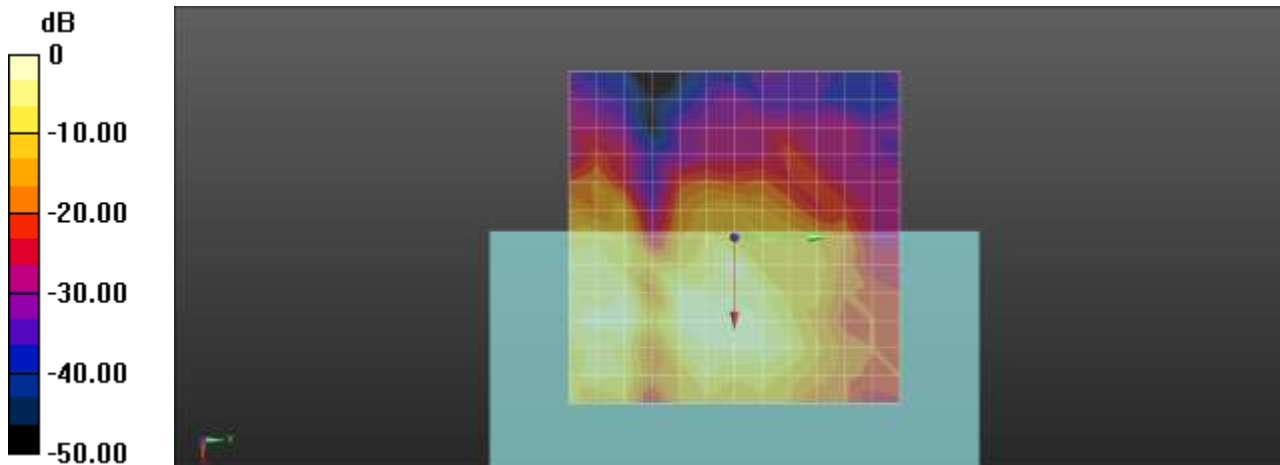

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.46**

**LTE 66 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 132322ch z(axial)**

Communication System: UID 0, LTE Band66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 4.46 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -30.51 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 34.97 dB

ABM1 comp = 4.46 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

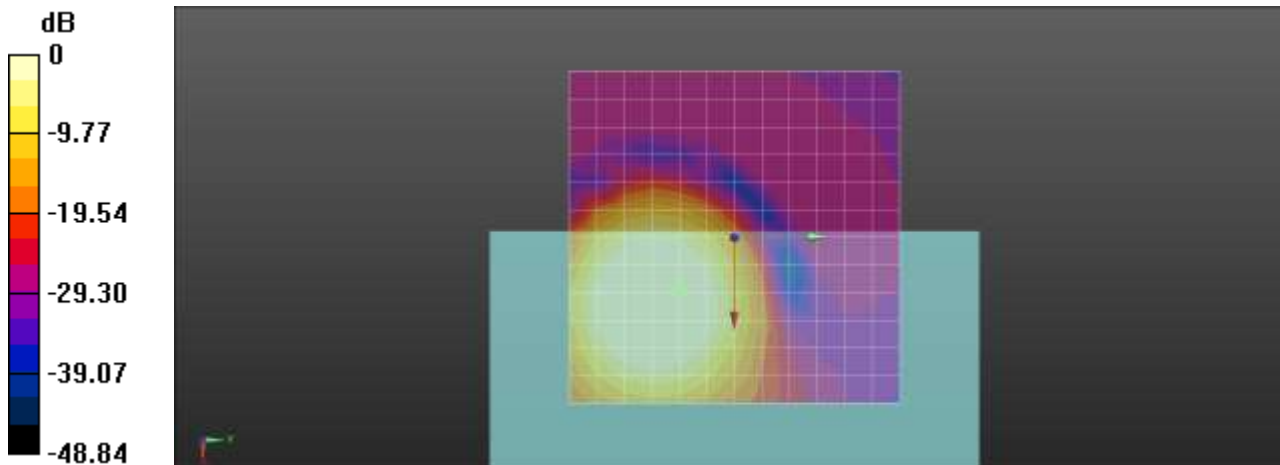

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.47**

**LTE 66 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 132322ch Freq.Response**

Communication System: UID 0, LTE Band66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 53.58  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.69 dB  
 BWC Factor = 9.47 dB  
 Location: 8.4, -9.6, 3.7 mm

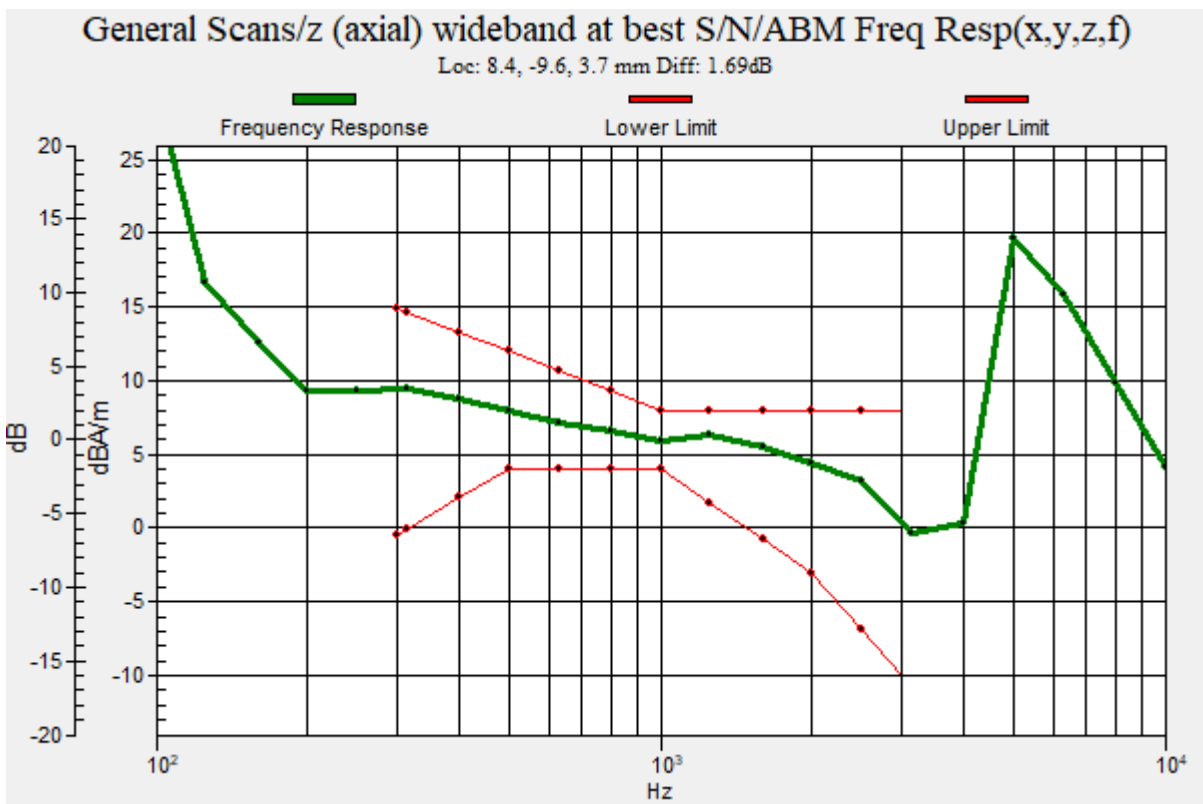



**Plot No.48**

**LTE 66 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 132322ch y(transversal)**

Communication System: UID 0, LTE Band66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
 Output Gain: 24.93  
 Measure Window Start: 300ms  
 Measure Window Length: 1000ms  
 BWC applied: 0.15 dB  
 Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -1.26 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 4.2, -4.2, 3.7 mm

**Cursor:**

ABM2 = -35.91 dBA/m  
 Location: 4.2, -4.2, 3.7 mm

**Cursor:**

ABM1/ABM2 = 34.66 dB  
 ABM1 comp = -1.26 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 4.2, -4.2, 3.7 mm

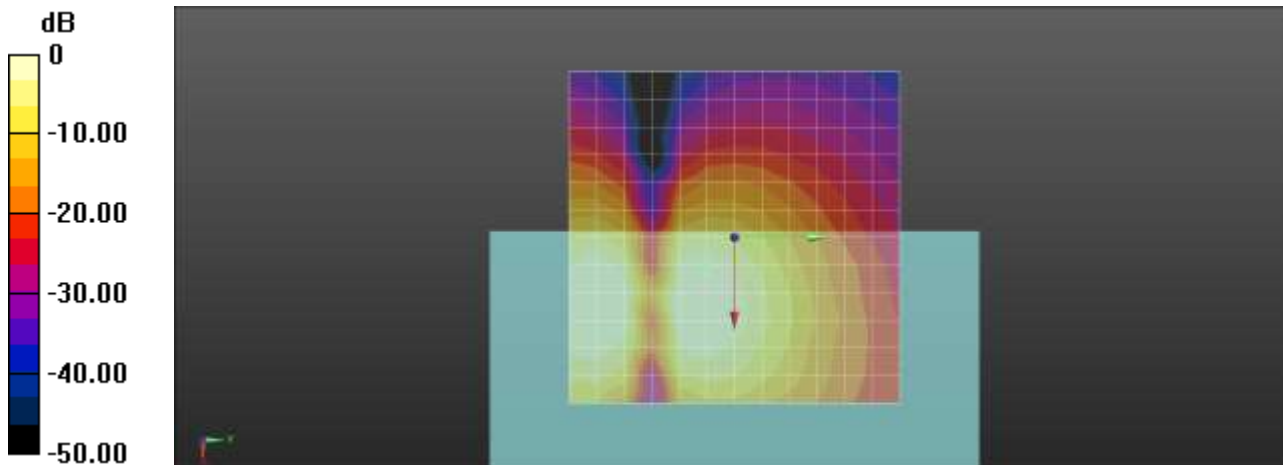

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.49**

**LTE 71 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 133322ch z(axial)**

Communication System: UID 0, LTE Band 71 (0); Frequency: 683 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -0.28 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -20.8, 3.7 mm

**Cursor:**

ABM2 = -33.11 dBA/m

Location: 12.5, -20.8, 3.7 mm


**Cursor:**

ABM1/ABM2 = 32.83 dB

ABM1 comp = -0.28 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -20.8, 3.7 mm

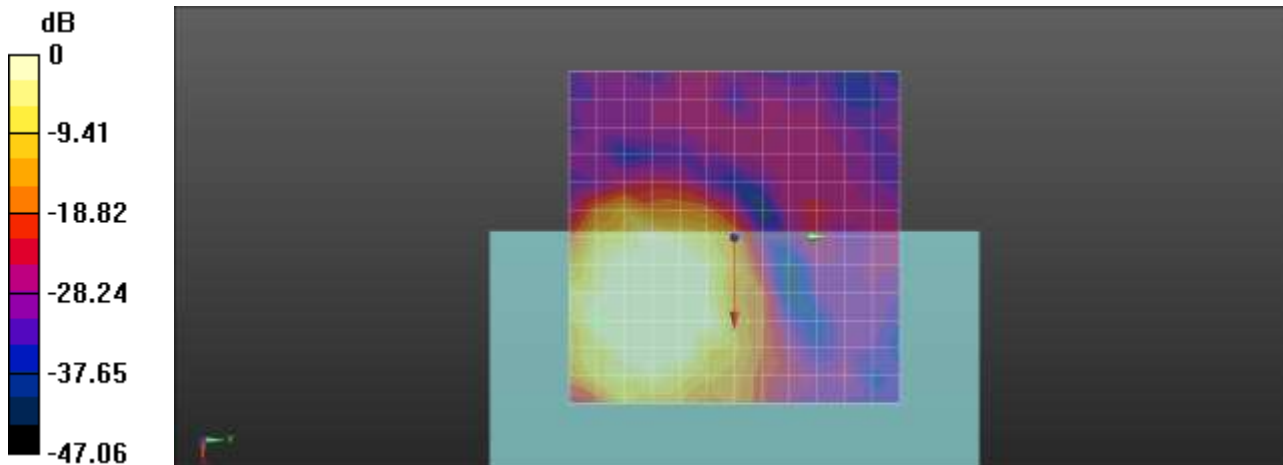

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.50**

**LTE 71 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 133322ch Freq.Response**

Communication System: UID 0, LTE Band 71 (0); Frequency: 683 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 53.58  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.47 dB  
 BWC Factor = 9.47 dB  
 Location: 4.6, -8.2, 3.7 mm

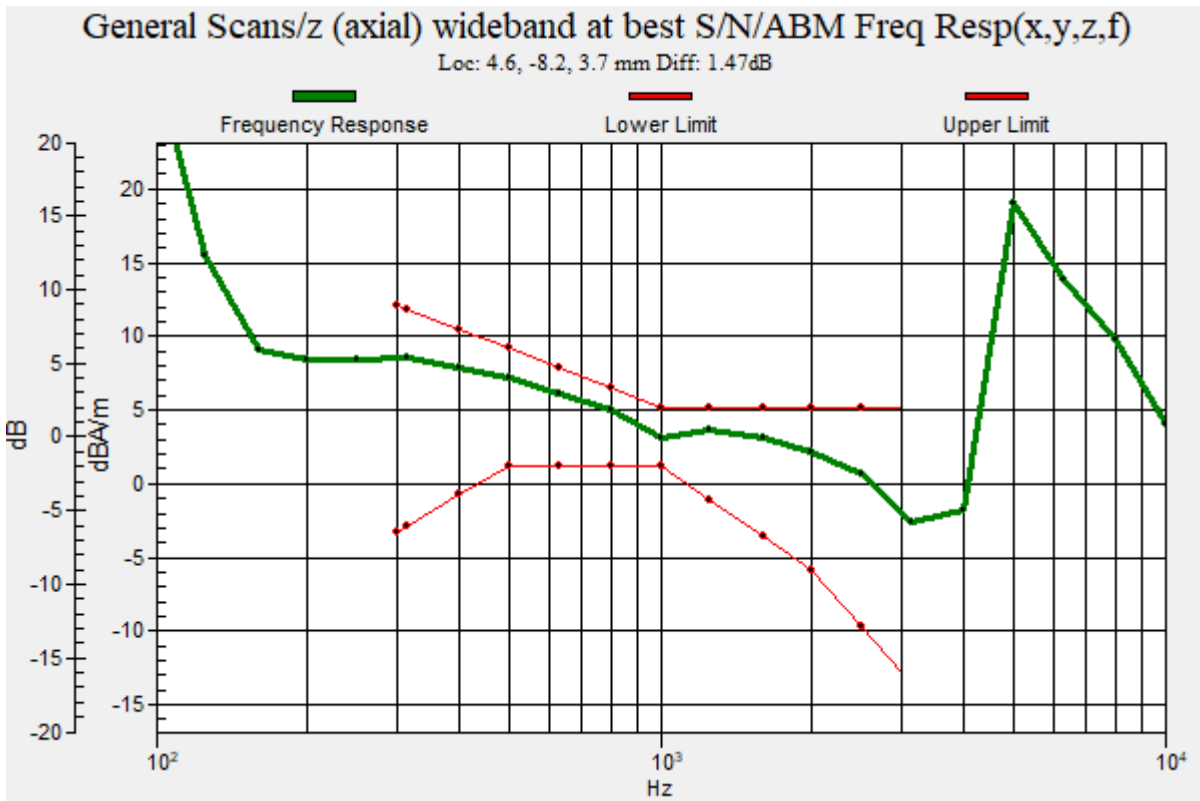

**Plot No.51**

**LTE 71 16QAM EVS WB 5.9bitrate 5MHz 1RB 12offset 133322ch y(transversal)**

Communication System: UID 0, LTE Band 71 (0); Frequency: 683 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.93

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -1.33 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -25, 3.7 mm

**Cursor:**

ABM2 = -34.57 dBA/m

Location: 4.2, -25, 3.7 mm


**Cursor:**

ABM1/ABM2 = 33.24 dB

ABM1 comp = -1.33 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -25, 3.7 mm

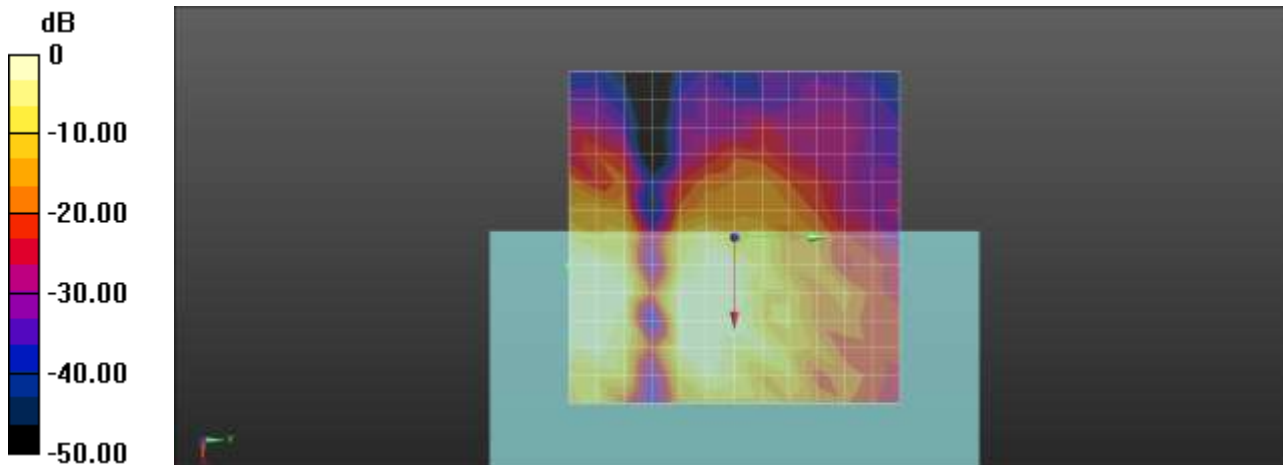

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.52**

**LTE 41 QPSK EVS WB 5\_9bitrate 20MHz 1RB 0offset 40620ch z(axial)**

Communication System: UID 0, LTE Band 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58016

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.8

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -0.56 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -4.2, 3.7 mm

**Cursor:**

ABM2 = -28.35 dBA/m

Location: 4.2, -4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 27.79 dB

ABM1 comp = -0.56 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -4.2, 3.7 mm

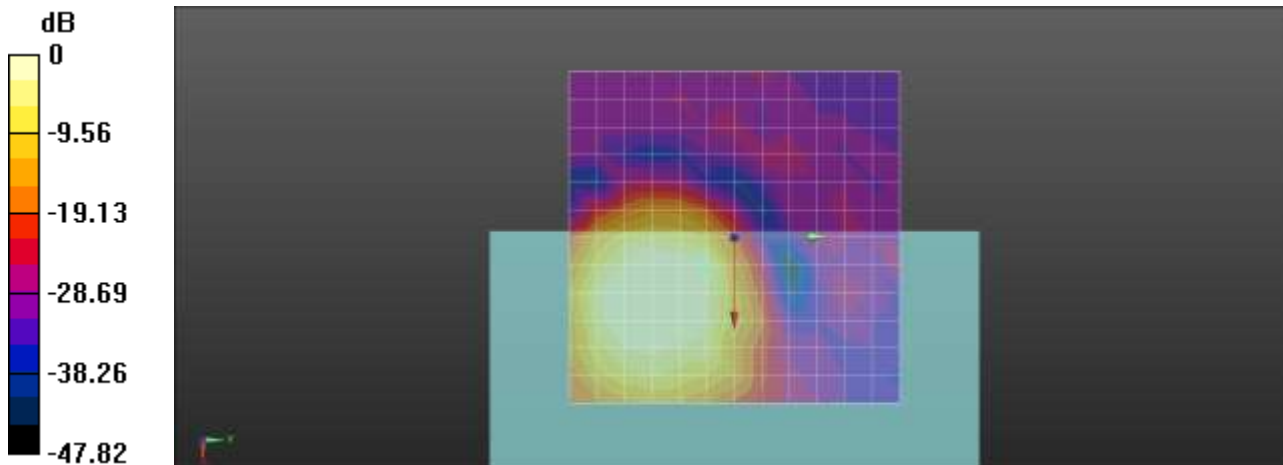

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.53**

**LTE 41 QPSK EVS WB 5\_9bitrate 20MHz 1RB 0offset 40620ch Freq.Response**

Communication System: UID 0, LTE Band 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav

Output Gain: 53.29

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.69 dB

BWC Factor = 9.47 dB

Location: 4.3, -4.5, 3.7 mm

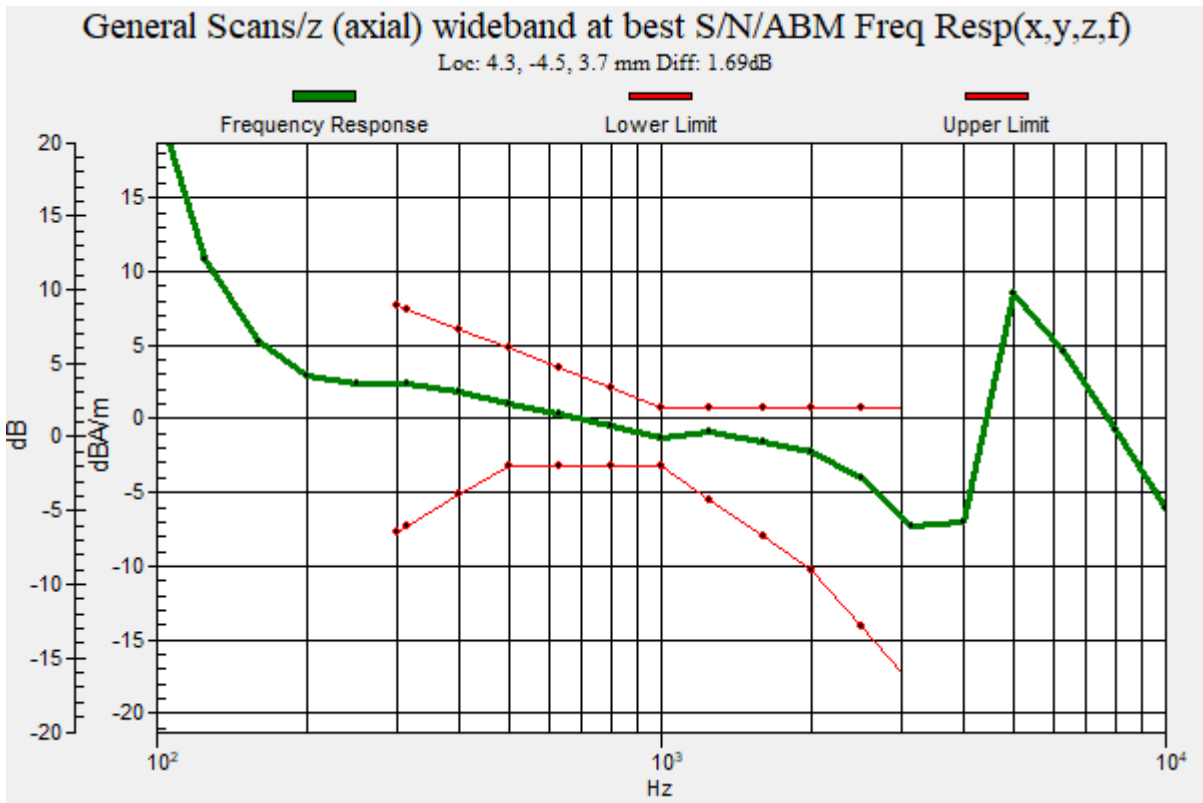

**Plot No.54**

**LTE 41 QPSK EVS WB 5\_9bitrate 20MHz 1RB 0offset 40620ch y(transversal)**

Communication System: UID 0, LTE Band 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58016  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.8

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -12.73 dBA/m

BWC Factor = 0.15 dB

Location: -4.2, -20.8, 3.7 mm

**Cursor:**

ABM2 = -37.54 dBA/m

Location: -4.2, -20.8, 3.7 mm


**Cursor:**

ABM1/ABM2 = 24.81 dB

ABM1 comp = -12.73 dBA/m

BWC Factor = 0.15 dB

Location: -4.2, -20.8, 3.7 mm

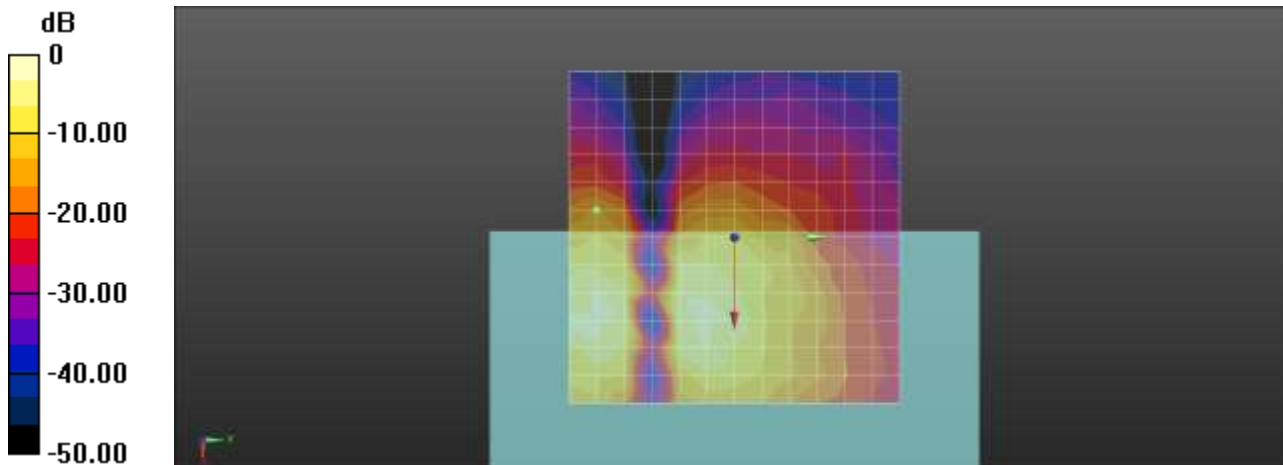

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.55**

**LTE 38 QPSK EVS WB 5\_9bitrate 20MHz 1RB 0offset 38000ch 6 6 z(axial)**

Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58016  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.8

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 3.72 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -16.7, 3.7 mm

**Cursor:**

ABM2 = -24.54 dBA/m

Location: 8.3, -16.7, 3.7 mm


**Cursor:**

ABM1/ABM2 = 28.25 dB

ABM1 comp = 3.72 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -16.7, 3.7 mm

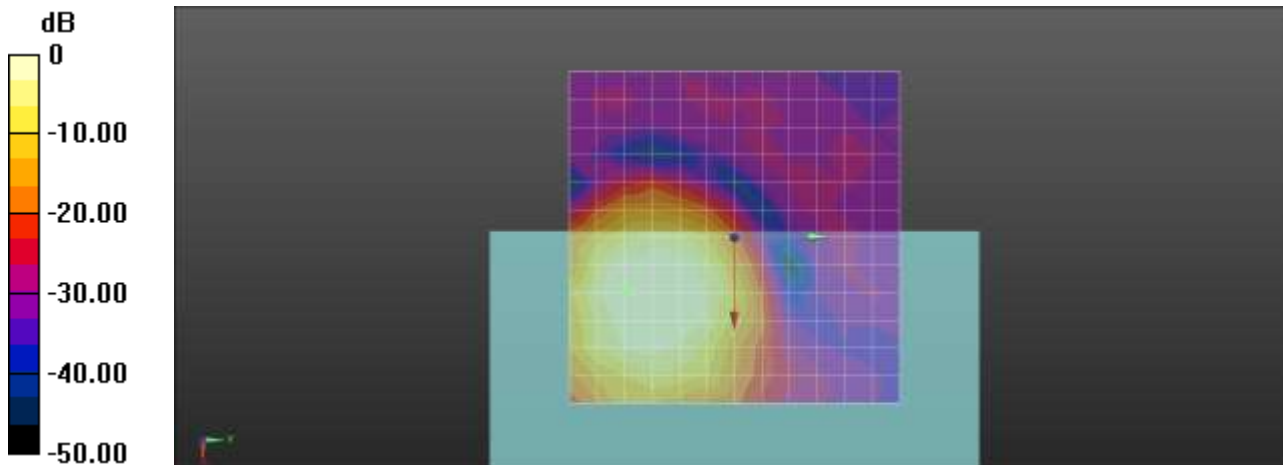

0 dB = 1.000 A/m = 0.00 dBA/m



**Plot No.56**

**LTE 38 QPSK EVS WB 5\_9bitrate 20MHz 1RB 0offset 38000ch 6 6 Freq.Response**

Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 53.29  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.58 dB  
 BWC Factor = 9.47 dB  
 Location: 8, -16.5, 3.7 mm

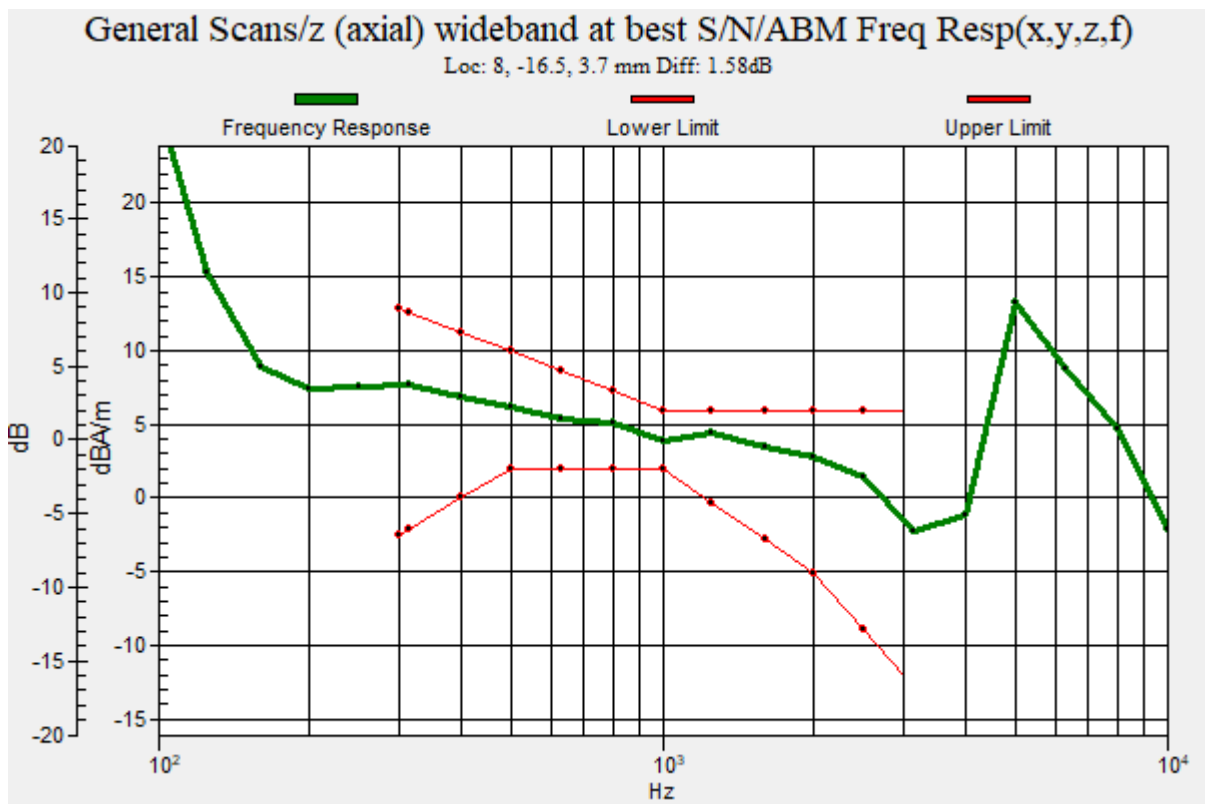

**Plot No.57**

**LTE 38 QPSK EVS WB 5\_9bitrate 20MHz 1RB 0offset 38000ch 6 6 y(transversal)**

Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.8

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -0.46 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -16.7, 3.7 mm

**Cursor:**

ABM2 = -27.86 dBA/m

Location: 12.5, -16.7, 3.7 mm



**Cursor:**

ABM1/ABM2 = 27.40 dB

ABM1 comp = -0.46 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -16.7, 3.7 mm

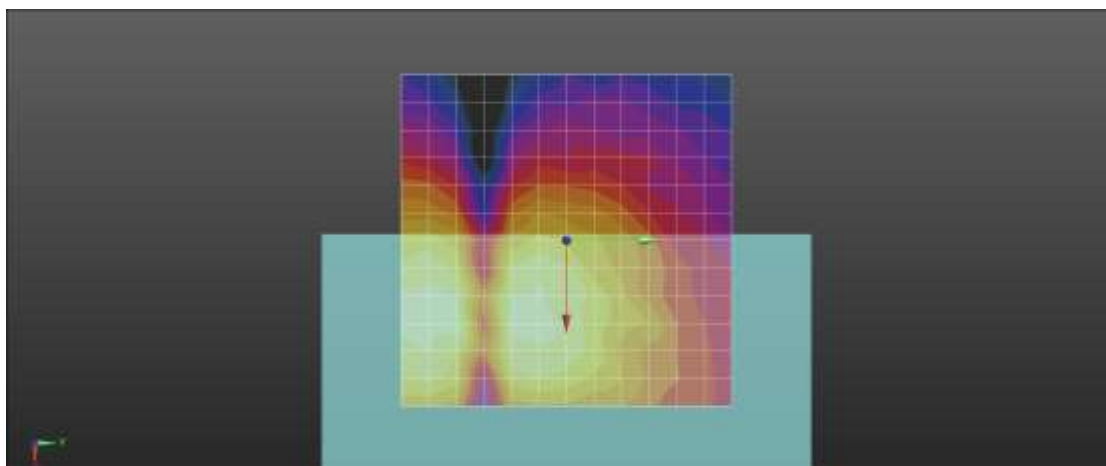

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.58**

**LTE 40 QPSK EVS WB 5\_9bitrate 20MHz 1RB 0offset 38750ch 6 6 z(axial)**

Communication System: UID 0, LTE Band40 (0); Frequency: 2310 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.8

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 2.49 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -24.60 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 27.09 dB

ABM1 comp = 2.49 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

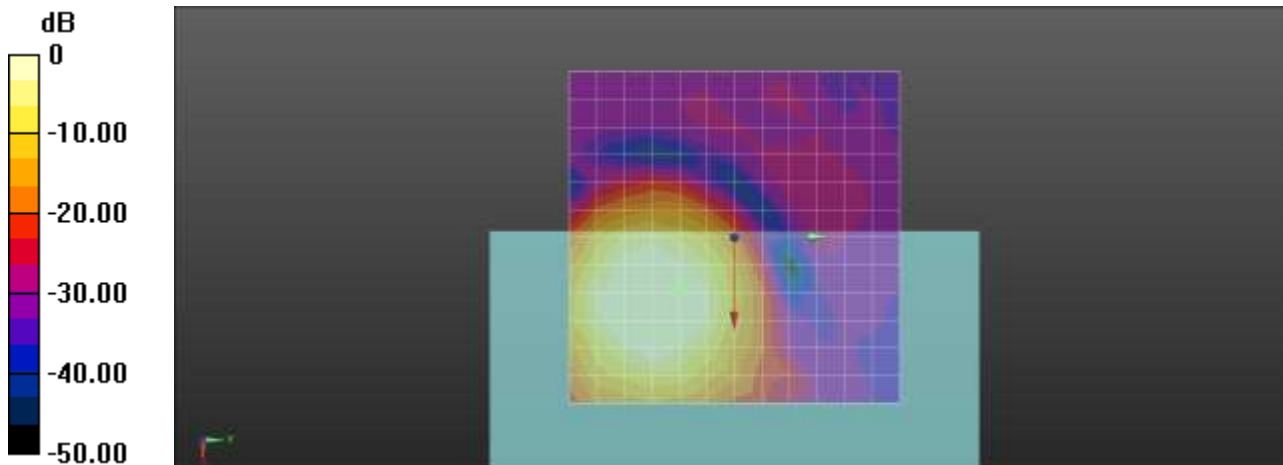

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.59**

**LTE 40 QPSK EVS WB 5\_9bitrate 20MHz 1RB 0offset 38750ch 6 6 Freq.Response**

Communication System: UID 0, LTE Band40 (0); Frequency: 2310 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav

Output Gain: 53.29

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.46 dB

BWC Factor = 9.47 dB

Location: 9.7, -8.2, 3.7 mm

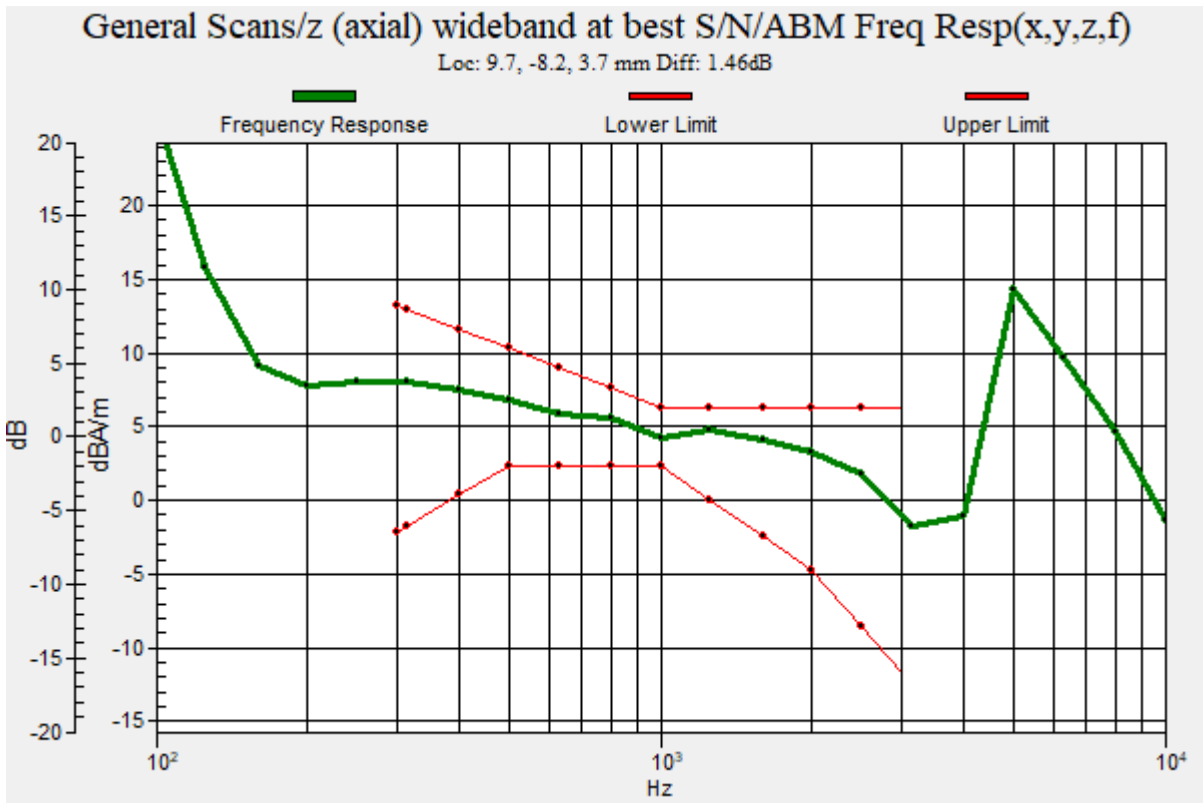

**Plot No.60**

**LTE 40 QPSK EVS WB 5\_9bitrate 20MHz 1RB 0offset 38750ch 6 6 y(transversal)**

Communication System: UID 0, LTE Band40 (0); Frequency: 2310 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.8

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -8.77 dBA/m

BWC Factor = 0.15 dB

Location: 0, 4.2, 3.7 mm

**Cursor:**

ABM2 = -36.97 dBA/m

Location: 0, 4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 28.20 dB

ABM1 comp = -8.77 dBA/m

BWC Factor = 0.15 dB

Location: 0, 4.2, 3.7 mm

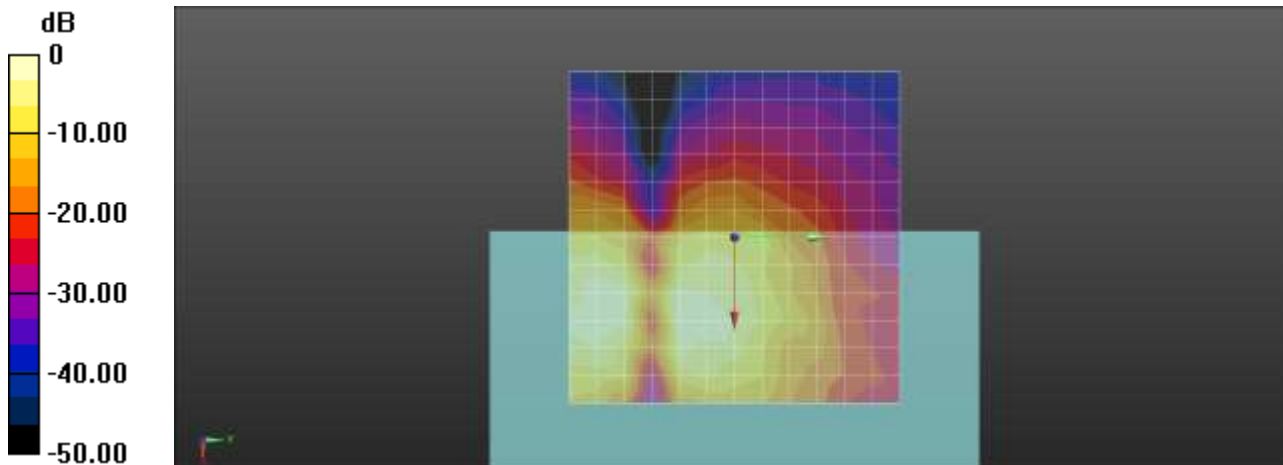

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.61**

**LTE 48 QPSK EVS WB 5\_9bitrate 20MHz 1RB 0offset 55990ch 6 6 z(axial)**

Communication System: UID 0, LTE 48 (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58016  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.8

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 1.12 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -24.11 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 25.23 dB

ABM1 comp = 1.12 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

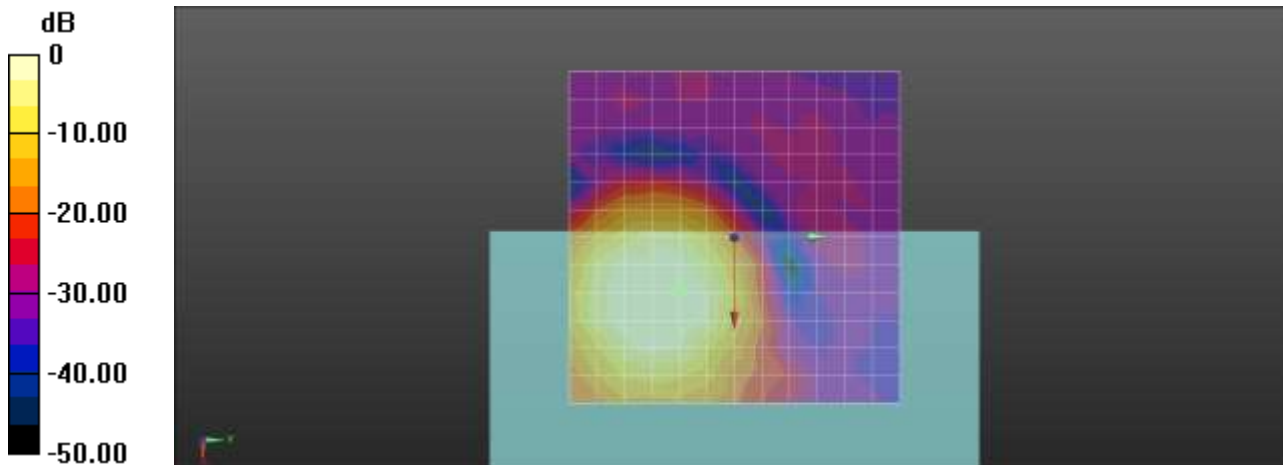

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.62**

**LTE 48 QPSK EVS WB 5\_9bitrate 20MHz 1RB 0offset 55990ch 6 6 Freq.Response**


Communication System: UID 0, LTE 48 (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 53.29  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.66 dB  
 BWC Factor = 9.47 dB  
 Location: 10.5, -4.8, 3.7 mm

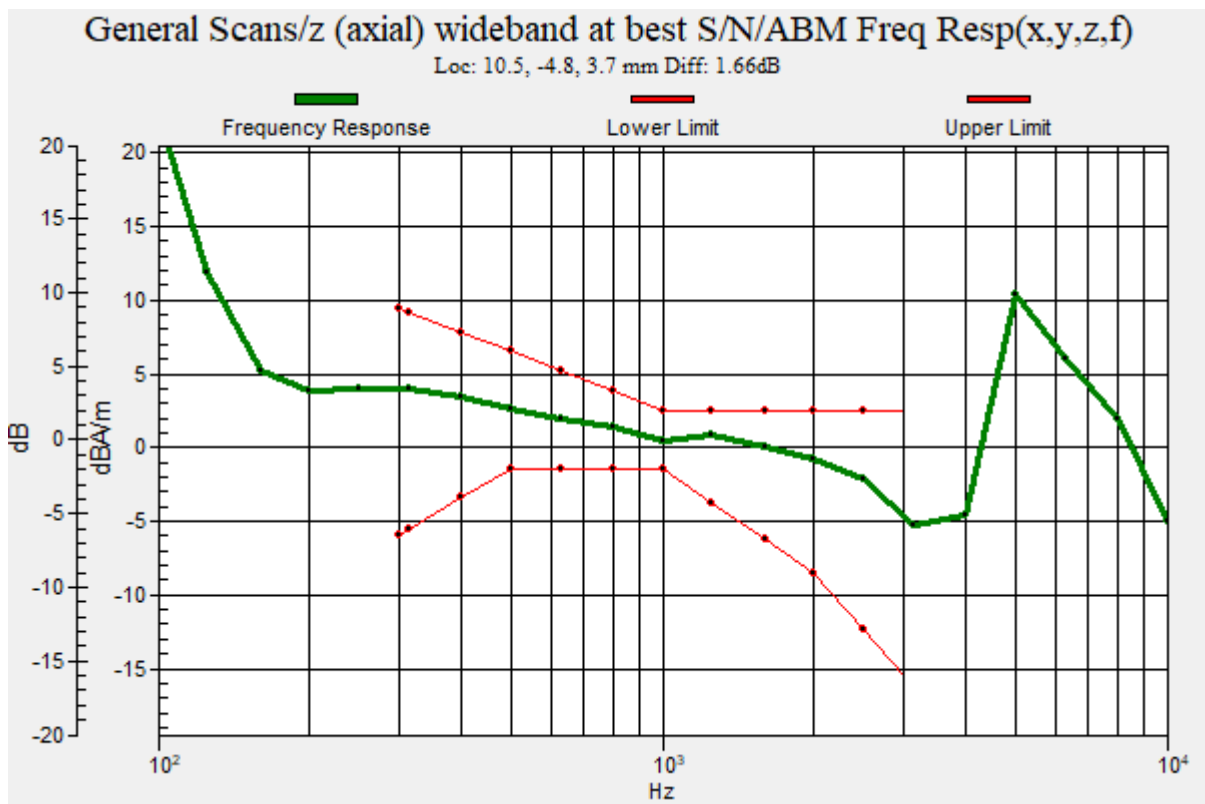

**Plot No.63**

**LTE 48 QPSK EVS WB 5\_9bitrate 20MHz 1RB 0offset 55990ch 6 6 y(transversal)**

Communication System: UID 0, LTE 48 (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 24.8

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -0.64 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -4.2, 3.7 mm

**Cursor:**

ABM2 = -25.80 dBA/m

Location: 8.3, -4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 25.16 dB

ABM1 comp = -0.64 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -4.2, 3.7 mm

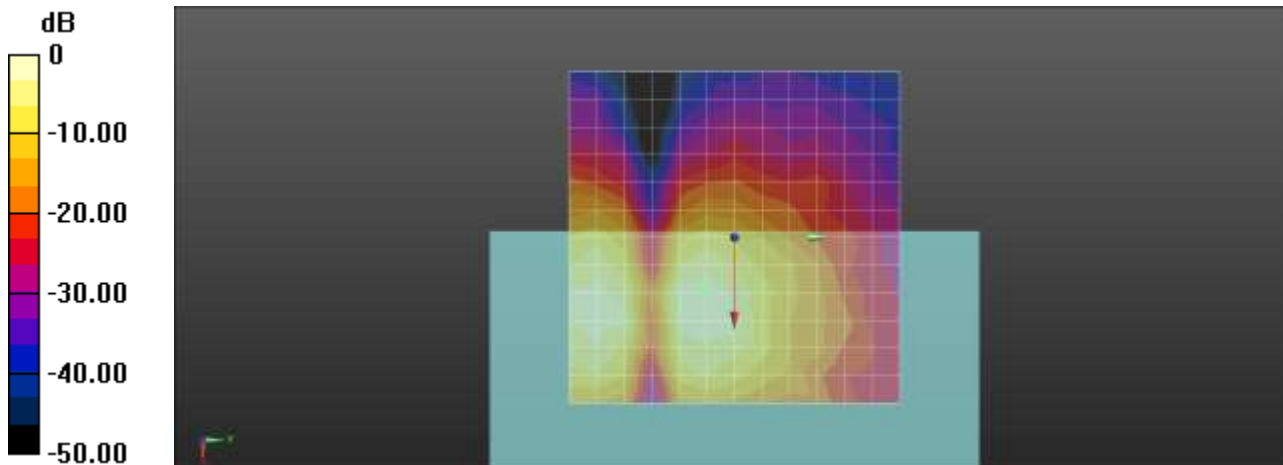

0 dB = 1.000 A/m = 0.00 dBA/m



**Plot No.64**

**802\_11b 5.5Mbps 6ch EVS NB 5\_9 z(axial)**

Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.58

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -3.81 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, -16.7, 3.7 mm

**Cursor:**

ABM2 = -30.00 dBA/m

Location: 8.3, -16.7, 3.7 mm


**Cursor:**

ABM1/ABM2 = 26.18 dB

ABM1 comp = -3.81 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, -16.7, 3.7 mm

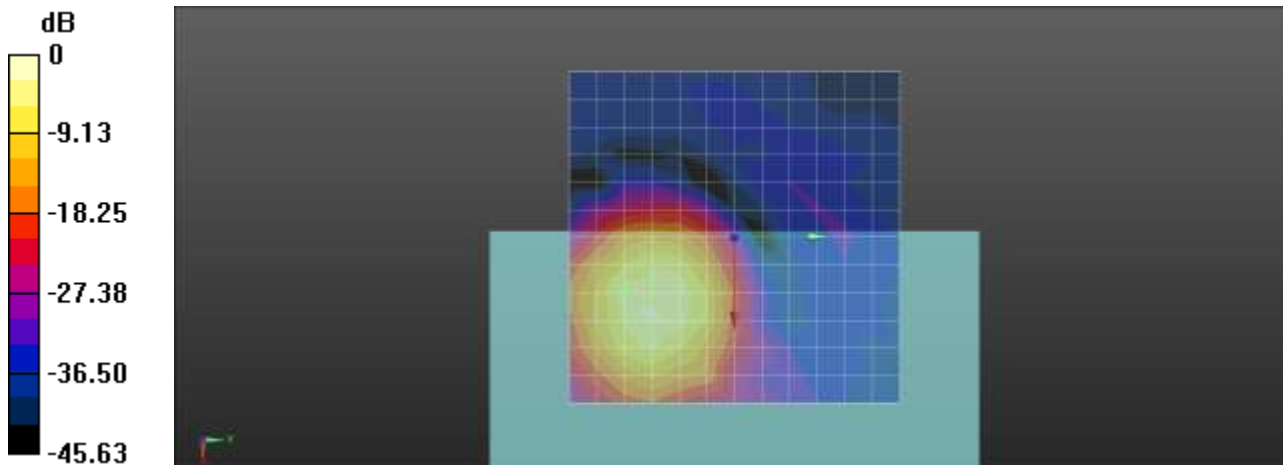

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.65**  
**802\_11b 5.5Mbps 6ch EVS NB 5\_9 Freq.Response**

Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 47.36  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.48 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.92 dB  
BWC Factor = 9.48 dB  
Location: 8.3, -16.6, 3.7 mm

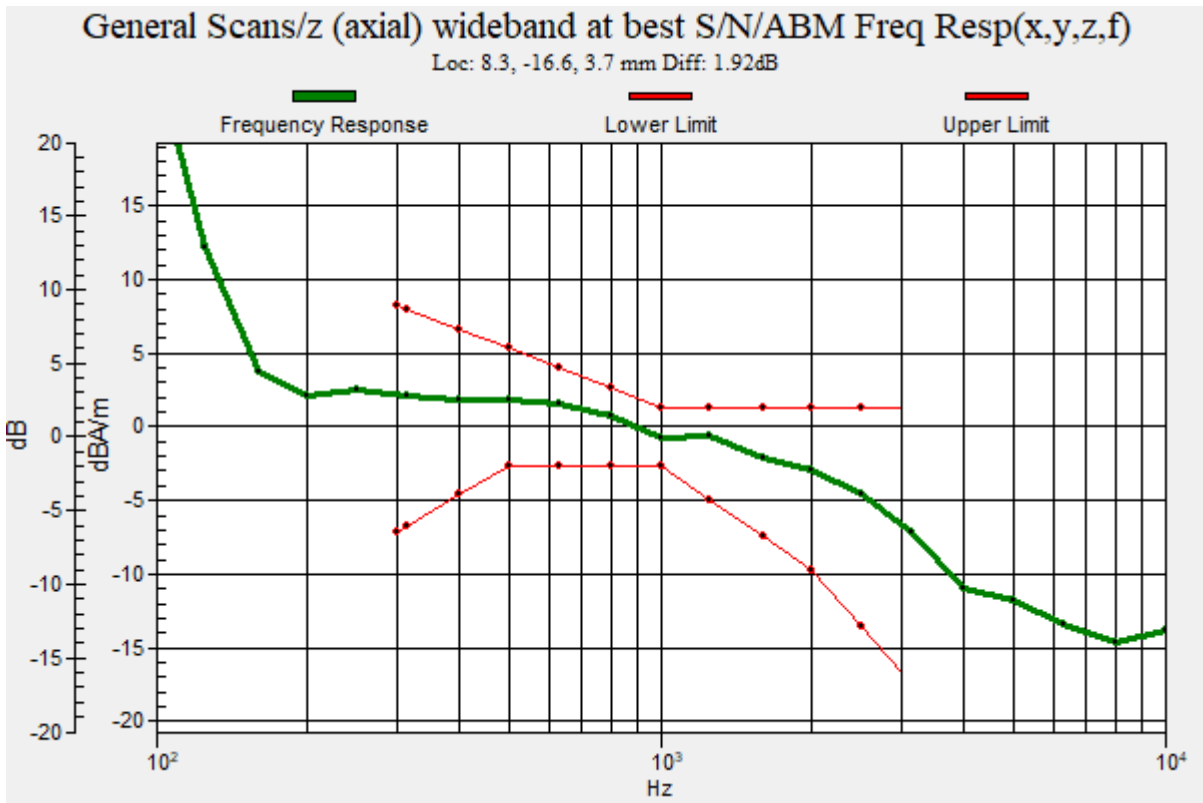

**Plot No.66**

**802\_11b 5.5Mbps 6ch EVS NB 5\_9 y(transversal)**

Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.58

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -13.74 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, 4.2, 3.7 mm

**Cursor:**

ABM2 = -40.94 dBA/m

Location: 4.2, 4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 27.20 dB

ABM1 comp = -13.74 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, 4.2, 3.7 mm

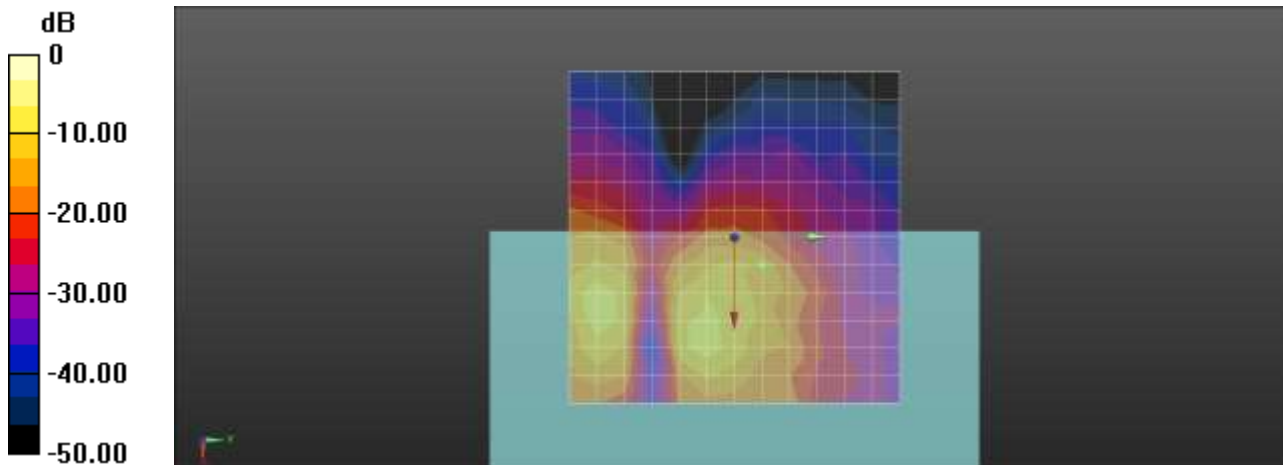

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.67**

**802\_11a QPSK 18Mbps 40ch EVS WB 5\_9 z(axial)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.58

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -6.97 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, -4.2, 3.7 mm

**Cursor:**

ABM2 = -33.03 dBA/m

Location: 4.2, -4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 26.06 dB

ABM1 comp = -6.97 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, -4.2, 3.7 mm

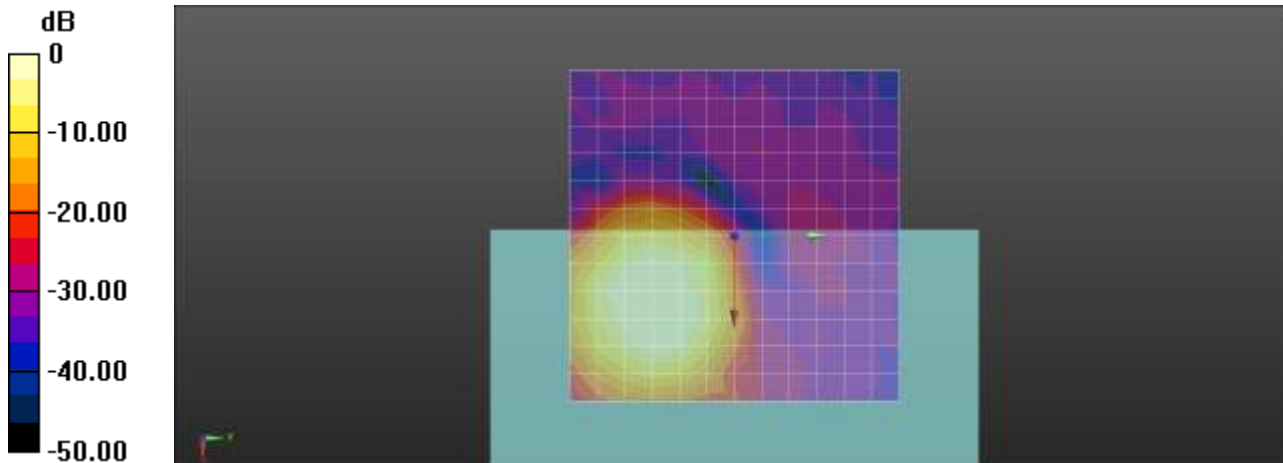

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.68**  
**802\_11a QPSK 18Mbps 40ch EVS WB 5\_9 Freq.Response**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 47.36  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.48 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.43 dB  
BWC Factor = 9.48 dB  
Location: 4.1, -4.5, 3.7 mm

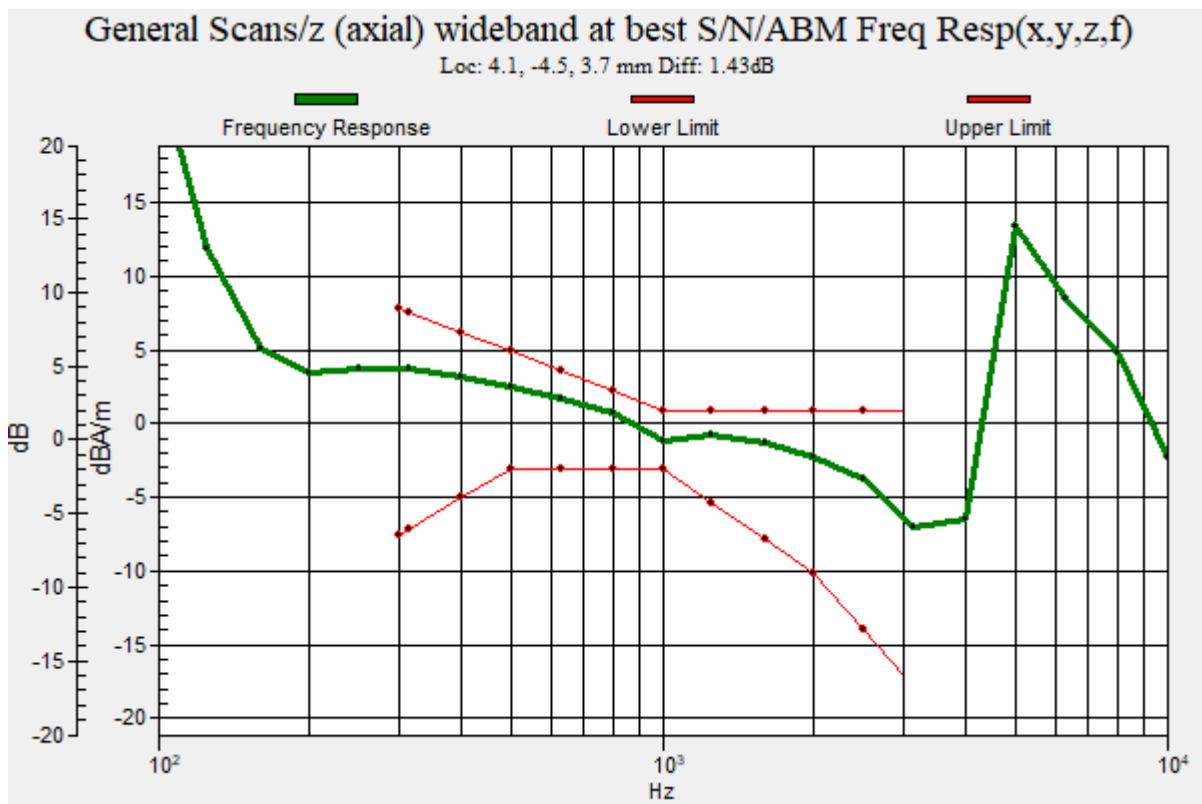

**Plot No.69**

**802\_11a QPSK 18Mbps 40ch EVS WB 5\_9 y(transversal)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
 Output Gain: 15.58  
 Measure Window Start: 300ms  
 Measure Window Length: 1000ms  
 BWC applied: 0.16 dB  
 Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -11.10 dBA/m  
 BWC Factor = 0.16 dB  
 Location: 0, 0, 3.7 mm

**Cursor:**

ABM2 = -39.25 dBA/m  
 Location: 0, 0, 3.7 mm

**Cursor:**

ABM1/ABM2 = 28.15 dB  
 ABM1 comp = -11.10 dBA/m  
 BWC Factor = 0.16 dB  
 Location: 0, 0, 3.7 mm

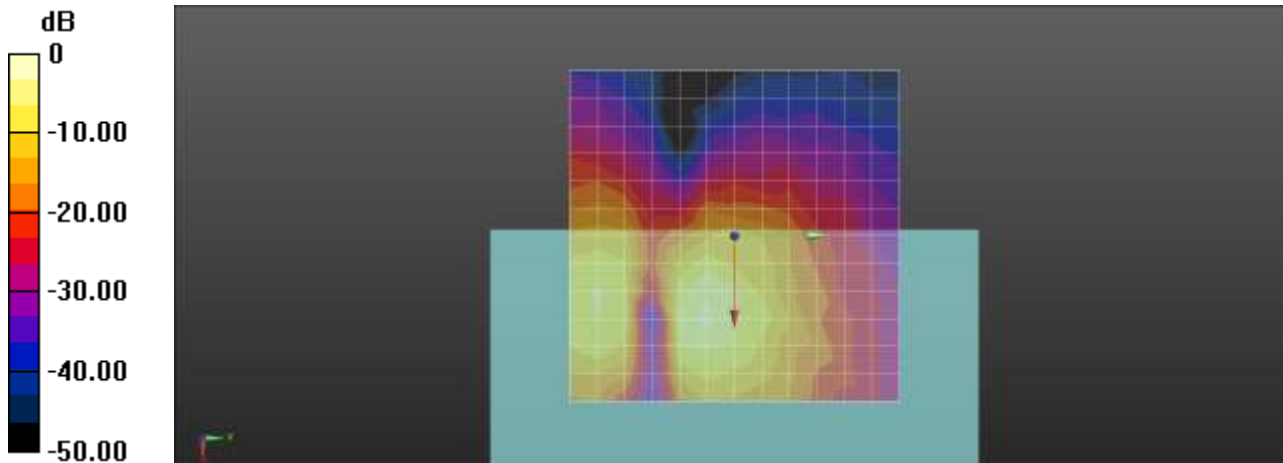

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.70**

**802\_11a QPSK 18Mbps 36ch EVS WB 5\_9 z(axial)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5180 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.58

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -3.86 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -4.2, 3.7 mm

**Cursor:**

ABM2 = -32.27 dBA/m

Location: 12.5, -4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 28.41 dB

ABM1 comp = -3.86 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -4.2, 3.7 mm

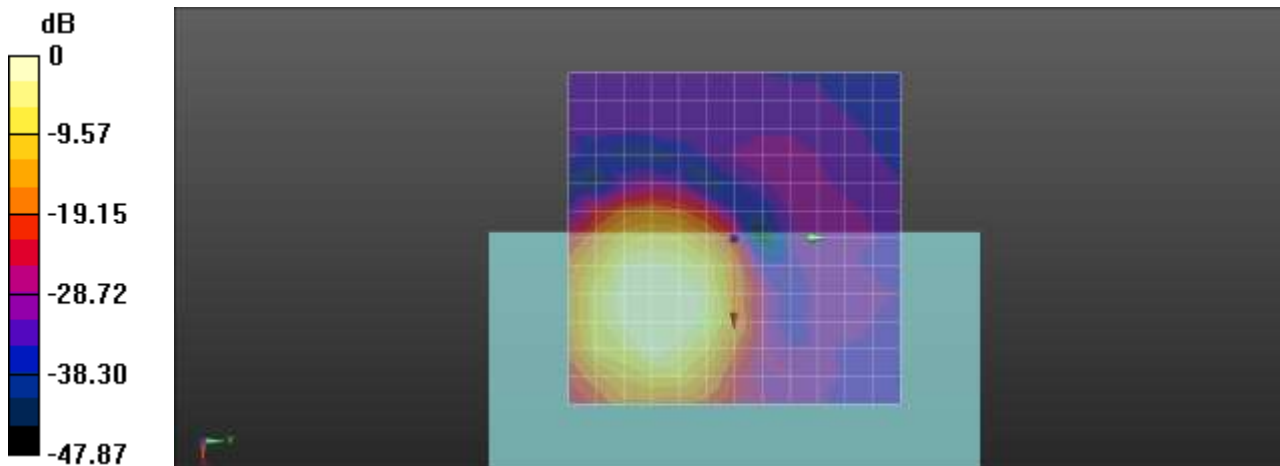

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.71**  
**802\_11a QPSK 18Mbps 36ch EVS WB 5\_9 Freq.Response**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5180 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 47.36  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.97 dB  
BWC Factor = 9.47 dB  
Location: 11.2, -4.4, 3.7 mm

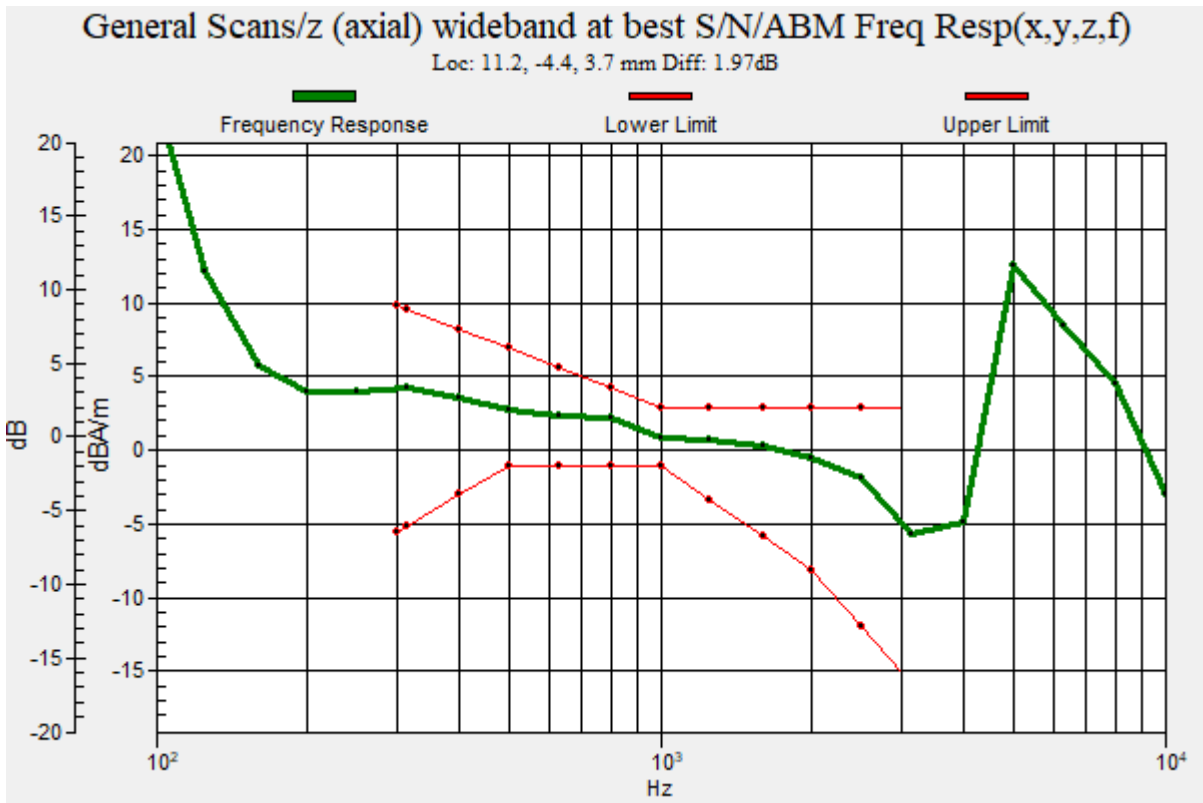



**Plot No.72**

**802\_11a QPSK 18Mbps 36ch EVS WB 5\_9 y(transversal)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5180 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.58

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -2.05 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, 0, 3.7 mm

**Cursor:**

ABM2 = -33.70 dBA/m

Location: 8.3, 0, 3.7 mm


**Cursor:**

ABM1/ABM2 = 31.65 dB

ABM1 comp = -2.05 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, 0, 3.7 mm

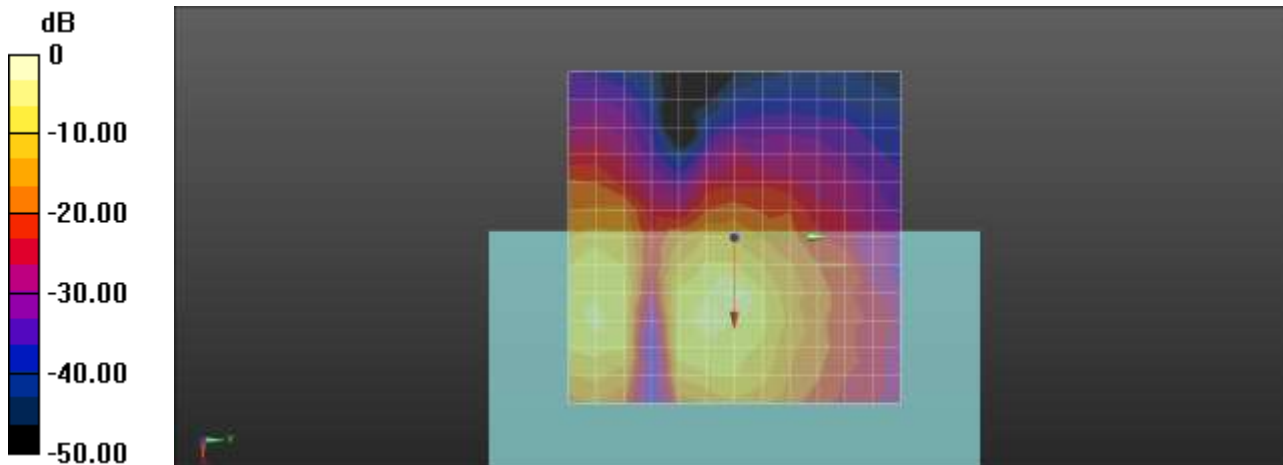

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.73**

**802\_11a QPSK 18Mbps 48ch EVS WB 5\_9 z(axial)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.58

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -6.39 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, -20.8, 3.7 mm

**Cursor:**

ABM2 = -34.78 dBA/m

Location: 16.7, -20.8, 3.7 mm


**Cursor:**

ABM1/ABM2 = 28.39 dB

ABM1 comp = -6.39 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, -20.8, 3.7 mm

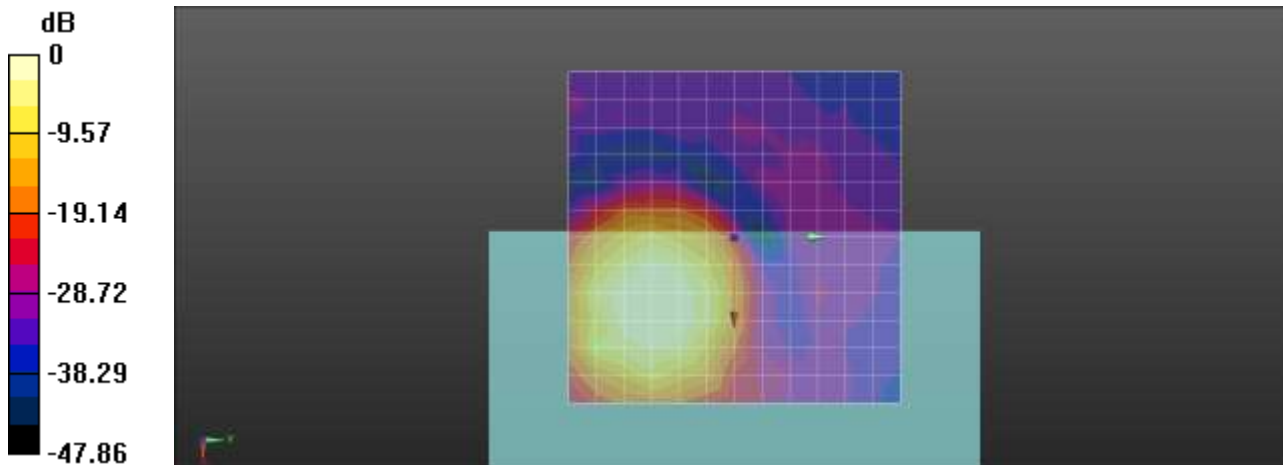

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.74**  
**802\_11a QPSK 18Mbps 48ch EVS WB 5\_9 Freq.Response**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 47.36  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 2.00 dB  
BWC Factor = 9.47 dB  
Location: 16.2, -20.8, 3.7 mm

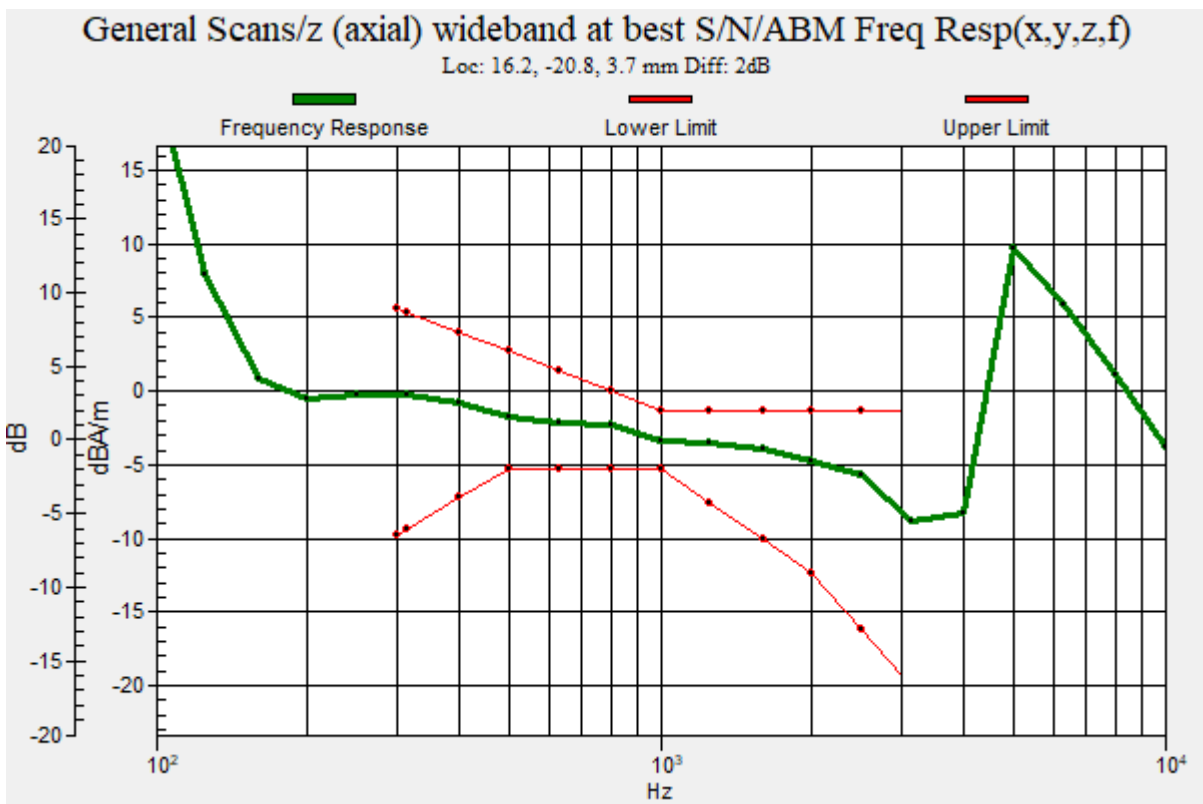

**Plot No.75**

**802\_11a QPSK 18Mbps 48ch EVS WB 5\_9 y(transversal)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.58

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -6.61 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, -20.8, 3.7 mm

**Cursor:**

ABM2 = -35.66 dBA/m

Location: 4.2, -20.8, 3.7 mm


**Cursor:**

ABM1/ABM2 = 29.05 dB

ABM1 comp = -6.61 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, -20.8, 3.7 mm

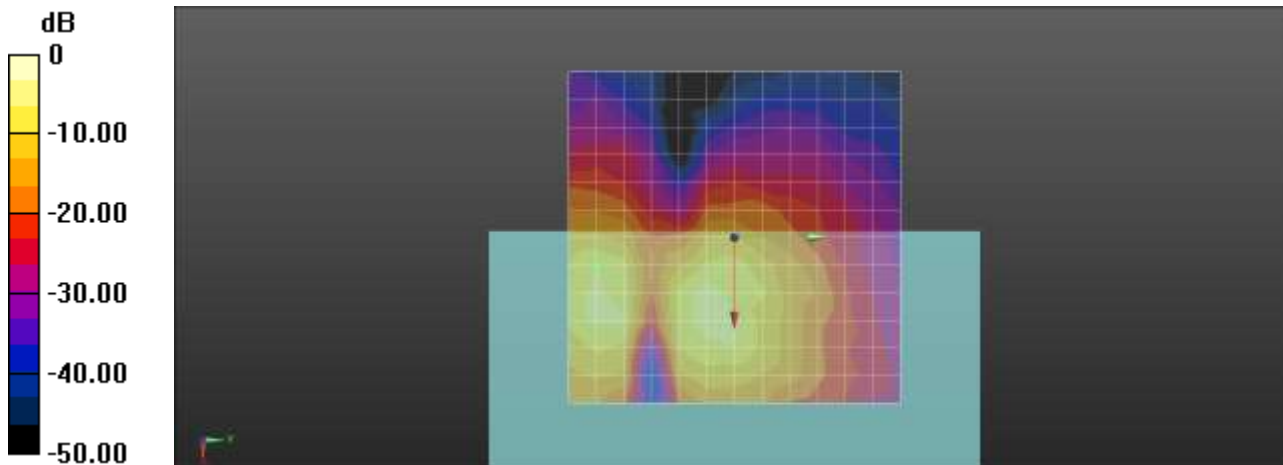

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.76**

**802\_11a QPSK 18Mbps 60ch EVS WB 5\_9 z(axial)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5300 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.58

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 0.22 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, -12.5, 3.7 mm

**Cursor:**

ABM2 = -29.11 dBA/m

Location: 4.2, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 29.33 dB

ABM1 comp = 0.22 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, -12.5, 3.7 mm

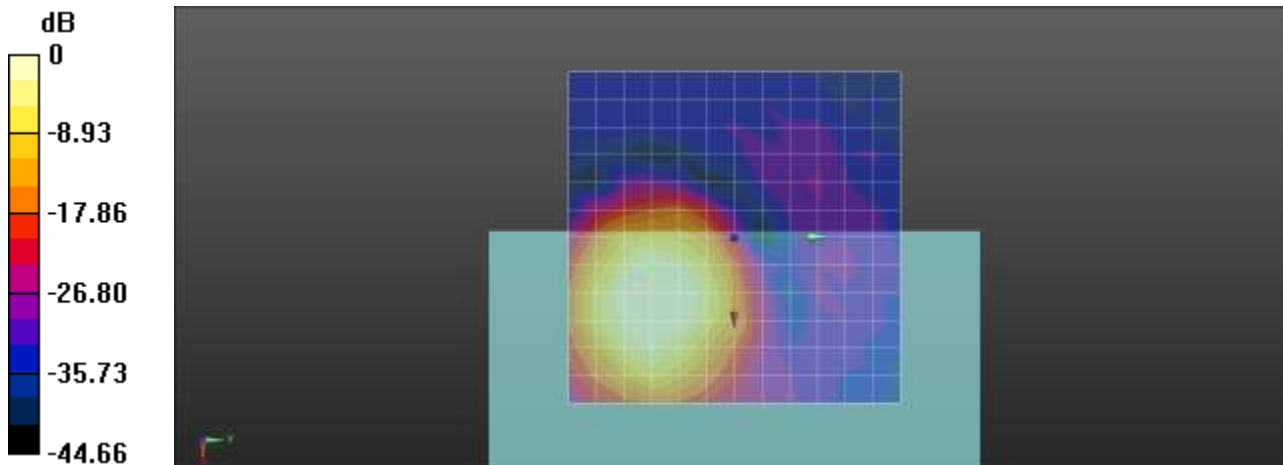

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.77**  
**802\_11a QPSK 18Mbps 60ch EVS WB 5\_9 Freq.Response**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5300 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 47.36  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 2.00 dB  
BWC Factor = 9.47 dB  
Location: 5, -12.4, 3.7 mm

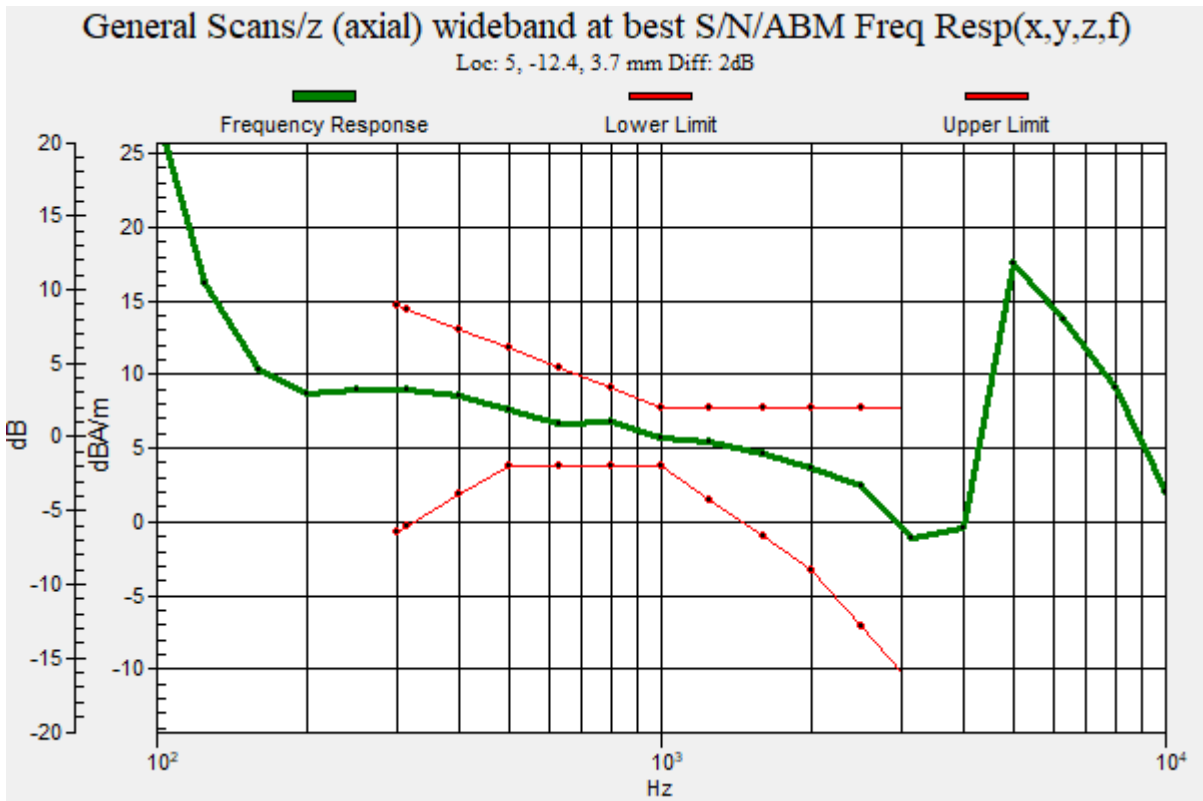

**Plot No.78**

**802\_11a QPSK 18Mbps 60ch EVS WB 5\_9 y(transversal)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5300 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.58

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -8.23 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, 0, 3.7 mm

**Cursor:**

ABM2 = -36.68 dBA/m

Location: 4.2, 0, 3.7 mm


**Cursor:**

ABM1/ABM2 = 28.45 dB

ABM1 comp = -8.23 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, 0, 3.7 mm

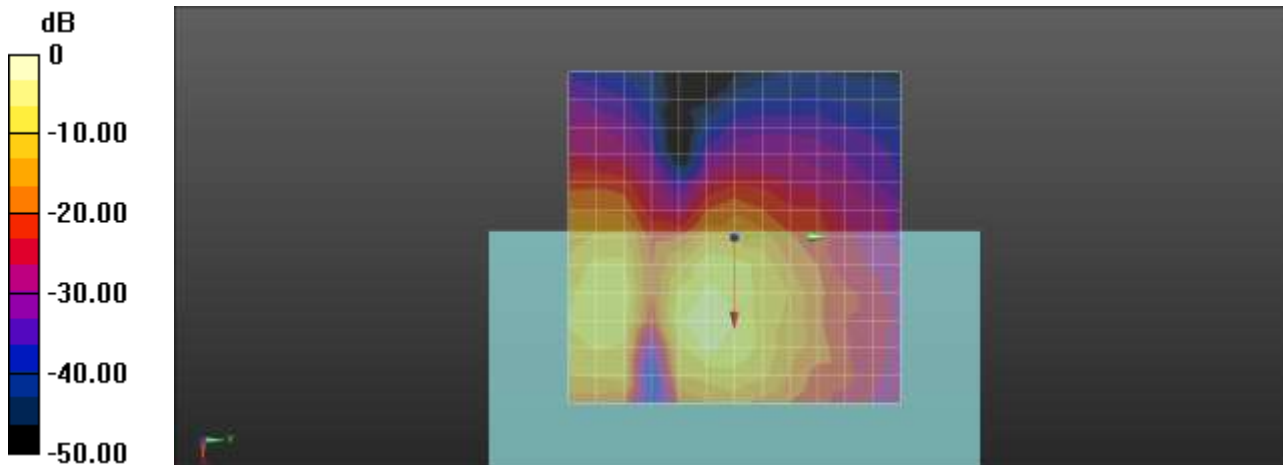

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.79**

**802\_11a QPSK 18Mbps 120ch EVS WB 5\_9 z(axial)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5600 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.58

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -2.32 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -4.2, 3.7 mm

**Cursor:**

ABM2 = -32.16 dBA/m

Location: 12.5, -4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 29.84 dB

ABM1 comp = -2.32 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -4.2, 3.7 mm

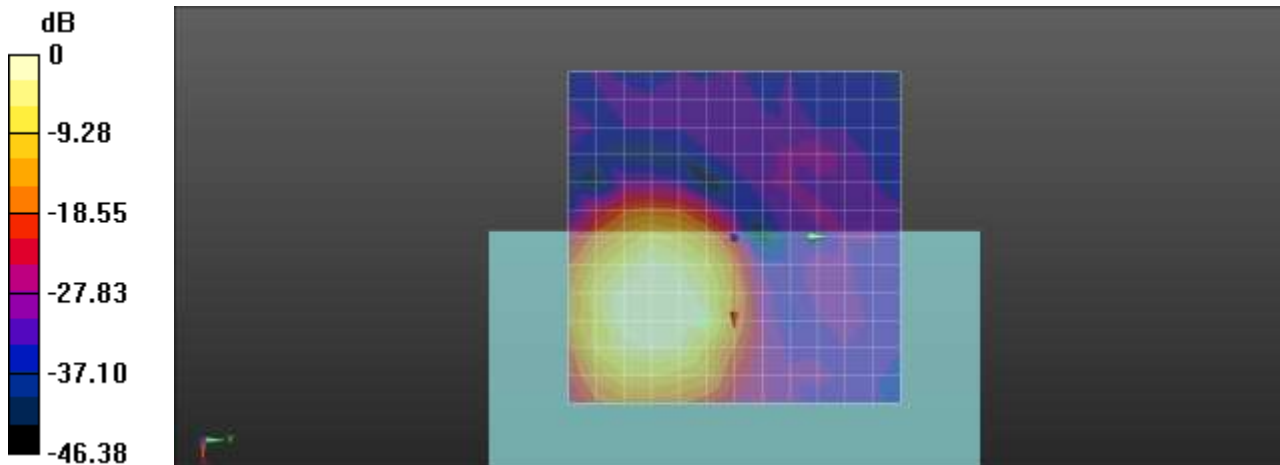

0 dB = 1.000 A/m = 0.00 dBA/m




**Plot No.80**  
**802\_11a QPSK 18Mbps 120ch EVS WB 5\_9 Freq.Response**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5600 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 47.36  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 2.00 dB  
BWC Factor = 9.47 dB  
Location: 12.2, -4.3, 3.7 mm

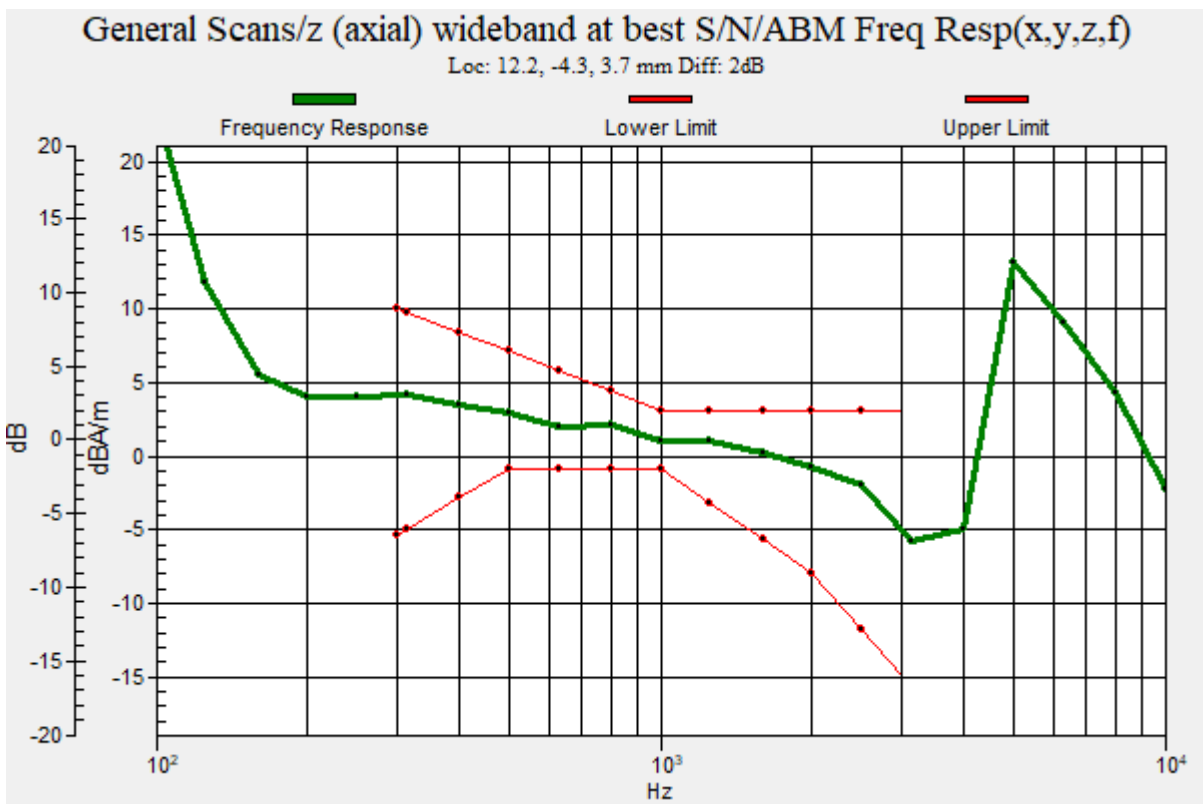

**Plot No.81**  
**802\_11a QPSK 18Mbps 120ch EVS WB 5\_9 y(transversal)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5600 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 15.58  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.16 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -11.21 dBA/m  
BWC Factor = 0.16 dB  
Location: 0, -16.7, 3.7 mm

**Cursor:**

ABM2 = -40.01 dBA/m  
Location: 0, -16.7, 3.7 mm

**Cursor:**

ABM1/ABM2 = 28.79 dB  
ABM1 comp = -11.21 dBA/m  
BWC Factor = 0.16 dB  
Location: 0, -16.7, 3.7 mm

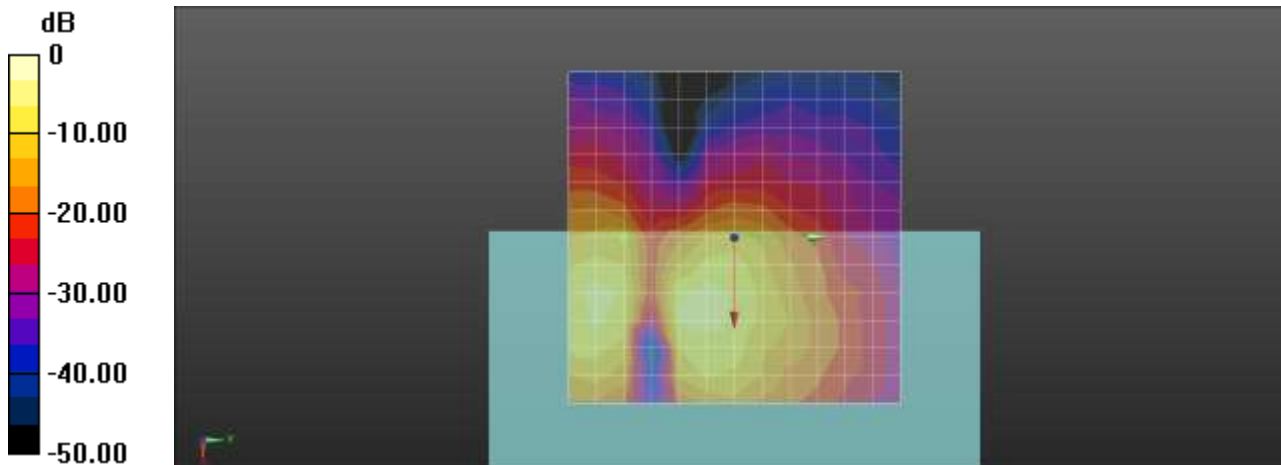

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.82**

**802\_11a QPSK 18Mbps 157ch EVS WB 5\_9 z(axial)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 15.58

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -12.54 dBA/m

BWC Factor = 0.16 dB

Location: 0, -4.2, 3.7 mm

**Cursor:**

ABM2 = -40.66 dBA/m

Location: 0, -4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 28.11 dB

ABM1 comp = -12.54 dBA/m

BWC Factor = 0.16 dB

Location: 0, -4.2, 3.7 mm

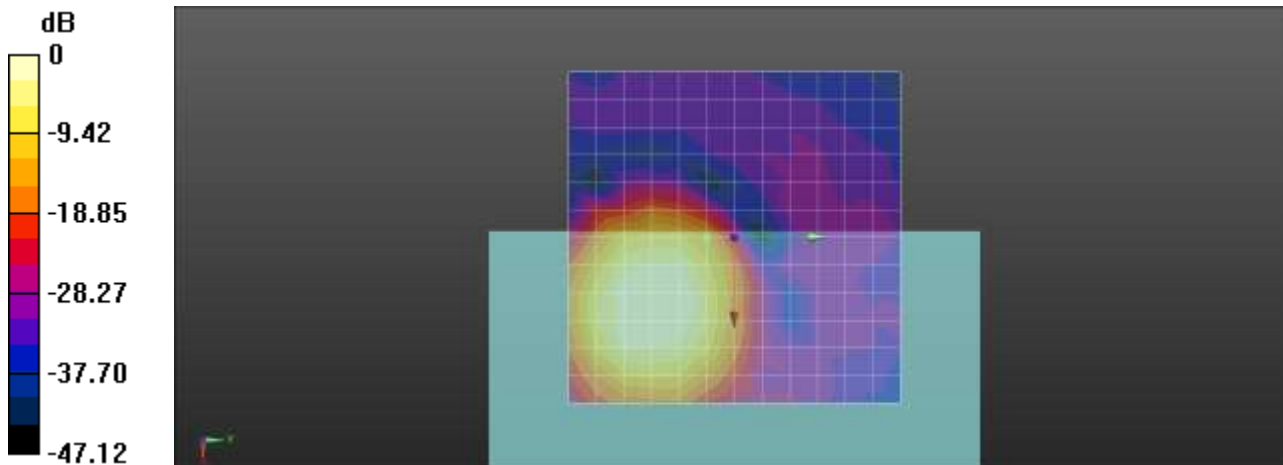

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.83**  
**802\_11a QPSK 18Mbps 157ch EVS WB 5\_9 Freq.Response**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 47.36  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.75 dB  
BWC Factor = 9.47 dB  
Location: 0.6, -5.5, 3.7 mm

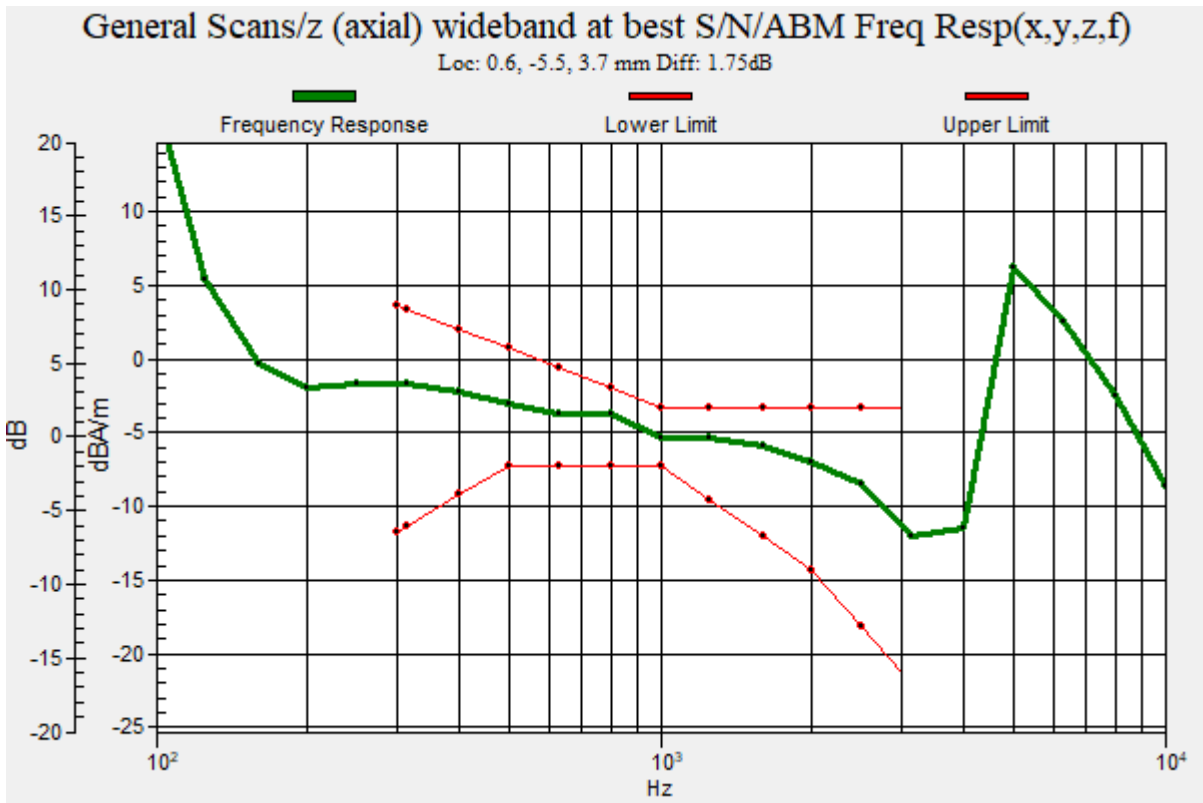

**Plot No.84**  
**802\_11a QPSK 18Mbps 157ch EVS WB 5\_9 y(transversal)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 15.58  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.16 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -6.27 dBA/m  
BWC Factor = 0.16 dB  
Location: 12.5, -8.3, 3.7 mm

**Cursor:**

ABM2 = -34.34 dBA/m  
Location: 12.5, -8.3, 3.7 mm

**Cursor:**

ABM1/ABM2 = 28.07 dB  
ABM1 comp = -6.27 dBA/m  
BWC Factor = 0.16 dB  
Location: 12.5, -8.3, 3.7 mm

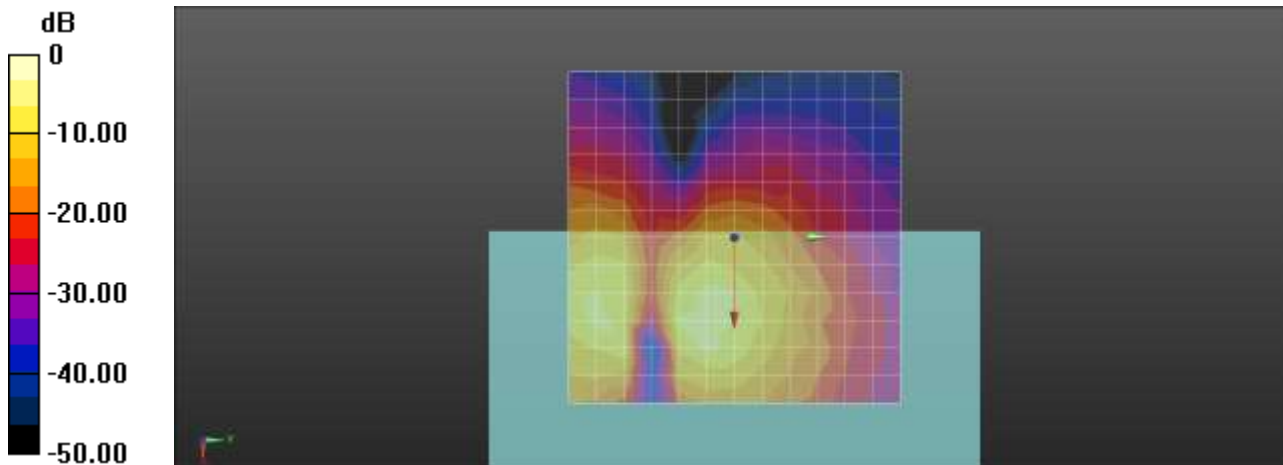

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.85**

**GSM850 Edge 2Tx 190ch Bitrate 6 z(axial)**

Communication System: UID 0, GSM850 GPRS 2TX (0); Frequency: 836.6 MHz;Duty Cycle: 1:4.14954  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 3000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 6.87 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -16.7, 3.7 mm

**Cursor:**

ABM2 = -36.59 dBA/m

Location: 12.5, -16.7, 3.7 mm


**Cursor:**

ABM1/ABM2 = 43.46 dB

ABM1 comp = 6.87 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -16.7, 3.7 mm

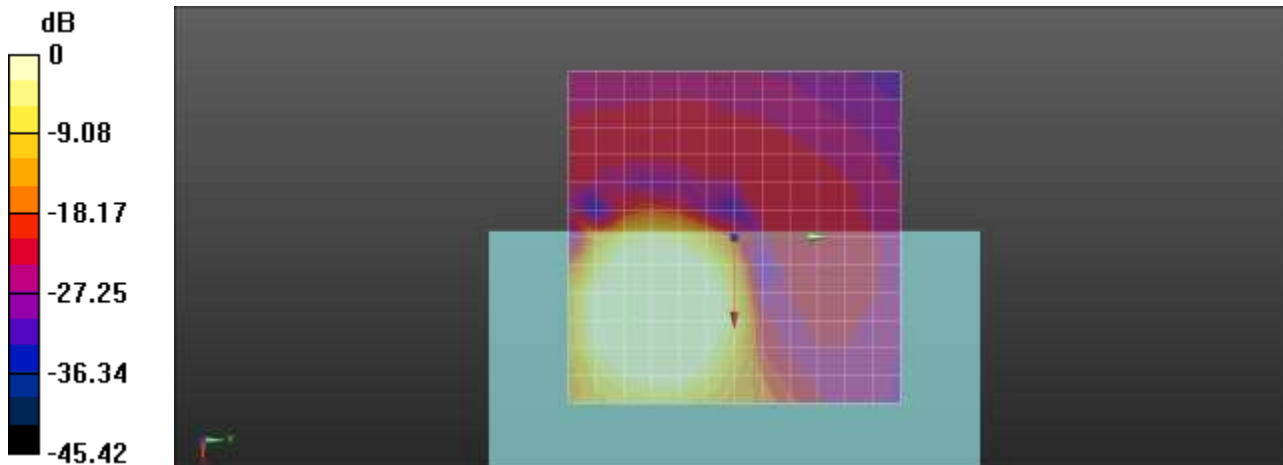

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.86**  
**GSM850 Edge 2Tx 190ch Bitrate 6 Freq.Response**

Communication System: UID 0, GSM850 GPRS 2TX (0); Frequency: 836.6 MHz;Duty Cycle: 1:4.14954  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.28 dB  
BWC Factor = 9.47 dB  
Location: 12.4, -16.4, 3.7 mm

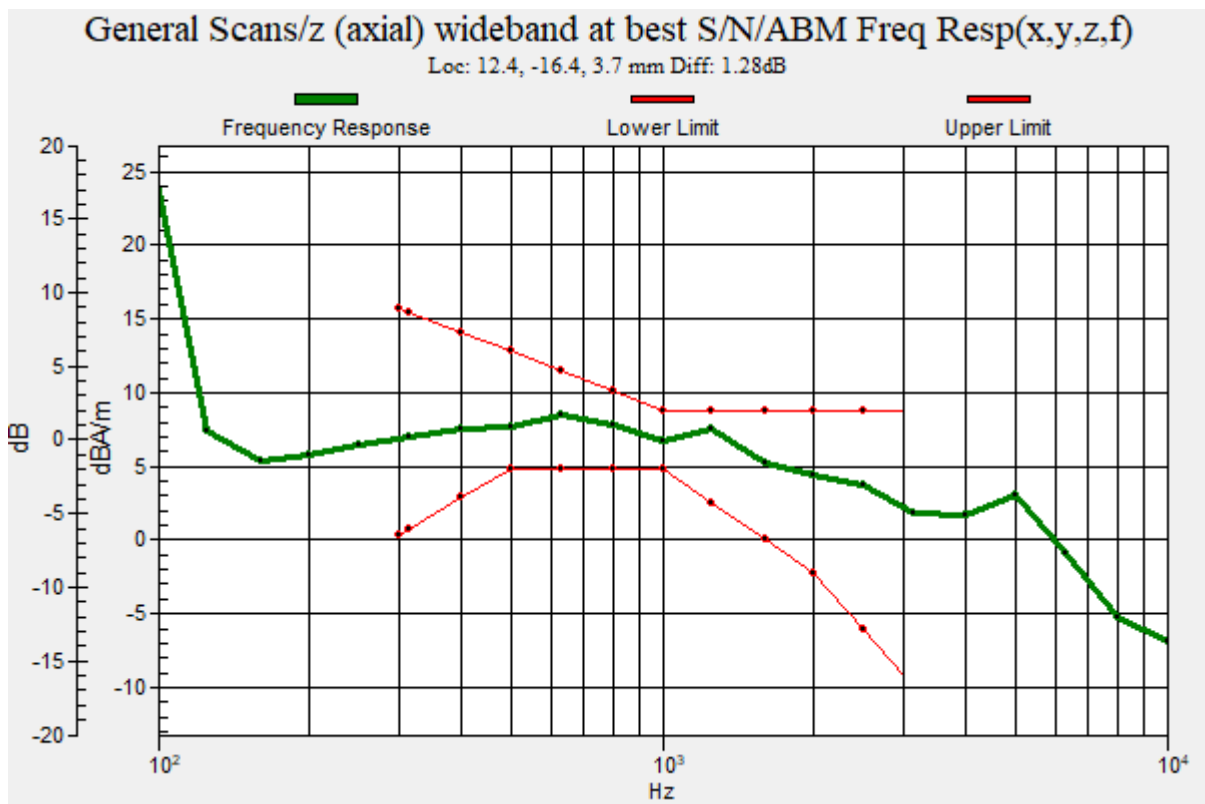

**Plot No.87**  
**GSM850 Edge 2Tx 190ch Bitrate 6 y(transversal)**

Communication System: UID 0, GSM850 GPRS 2TX (0); Frequency: 836.6 MHz;Duty Cycle: 1:4.14954  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:


- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 3000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM1 comp = 1.79 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -4.2, 3.7 mm

**Cursor:**  
ABM2 = -38.23 dBA/m  
Location: 8.3, -4.2, 3.7 mm

**Cursor:**  
ABM1/ABM2 = 40.02 dB  
ABM1 comp = 1.79 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -4.2, 3.7 mm

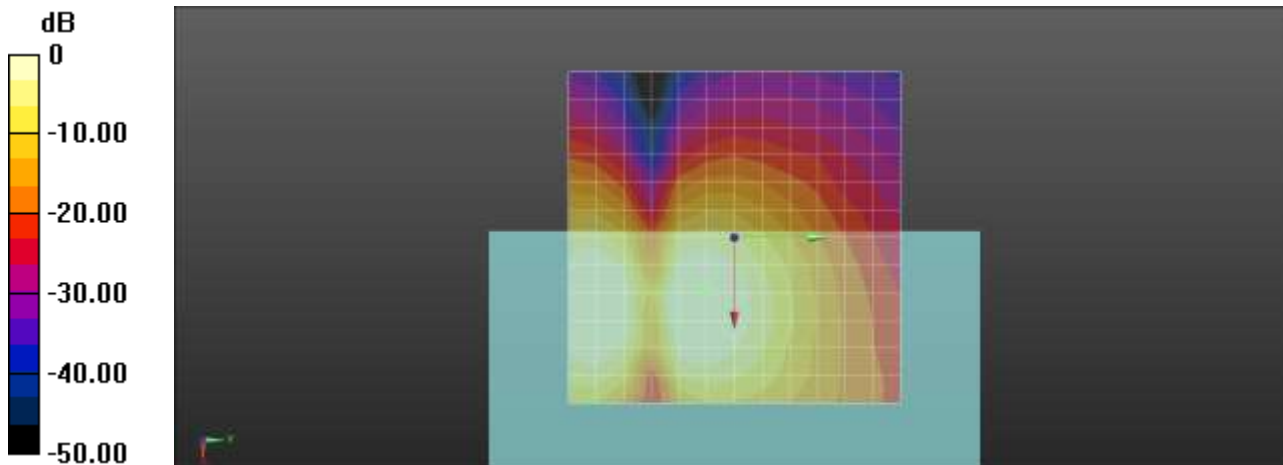

0 dB = 1.000 A/m = 0.00 dBA/m



**Plot No.88**  
**GSM1900 Edge 2Tx 810ch Bitrate 6 z(axial)**

Communication System: UID 0, GSM 1900 2TX (0); Frequency: 1909.8 MHz;Duty Cycle: 1:4.14954  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 3000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 6.87 dBA/m  
BWC Factor = 0.15 dB  
Location: 12.5, -16.7, 3.7 mm

**Cursor:**

ABM2 = -34.34 dBA/m  
Location: 12.5, -16.7, 3.7 mm

**Cursor:**

ABM1/ABM2 = 41.21 dB  
ABM1 comp = 6.87 dBA/m  
BWC Factor = 0.15 dB  
Location: 12.5, -16.7, 3.7 mm

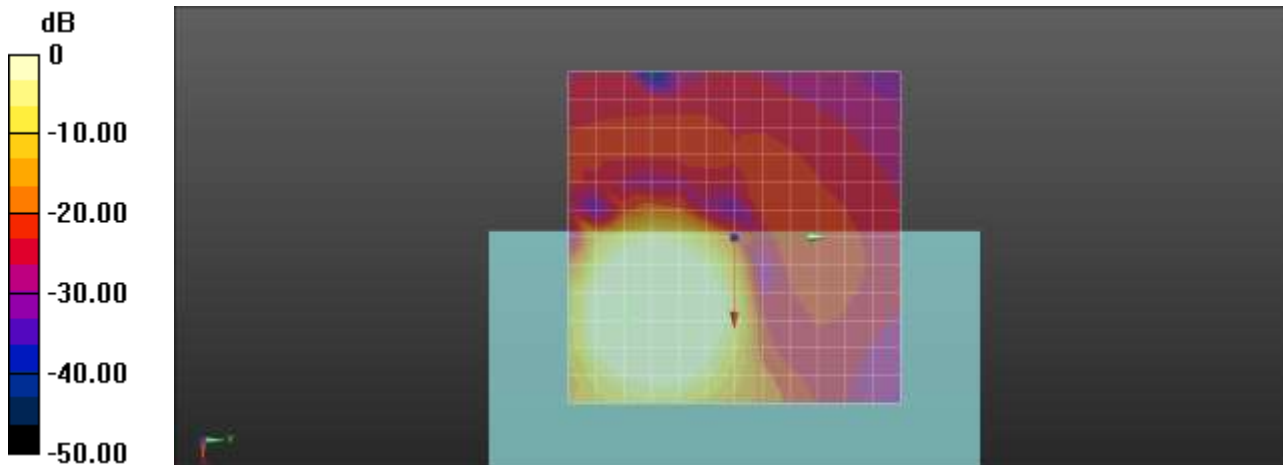

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.89**  
**GSM1900 Edge 2Tx 810ch Bitrate 6 Freq.Response**

Communication System: UID 0, GSM 1900 2TX (0); Frequency: 1909.8 MHz;Duty Cycle: 1:4.14954  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.35 dB  
BWC Factor = 9.47 dB  
Location: 12.3, -16.3, 3.7 mm

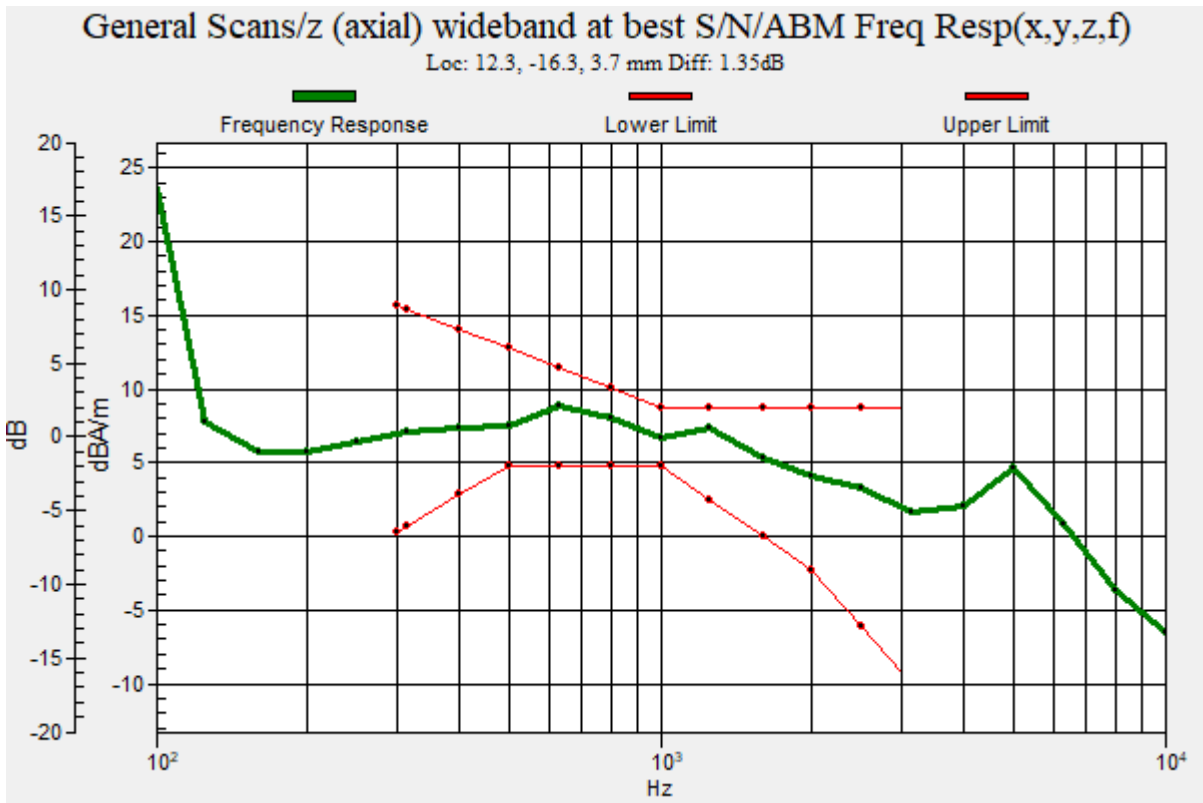

**Plot No.90**

**GSM1900 Edge 2Tx 810ch Bitrate 6 y(transversal)**

Communication System: UID 0, GSM 1900 2TX (0); Frequency: 1909.8 MHz;Duty Cycle: 1:4.14954  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 3000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = -1.70 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -8.3, 3.7 mm

**Cursor:**

ABM2 = -35.15 dBA/m

Location: 4.2, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 33.45 dB

ABM1 comp = -1.70 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -8.3, 3.7 mm

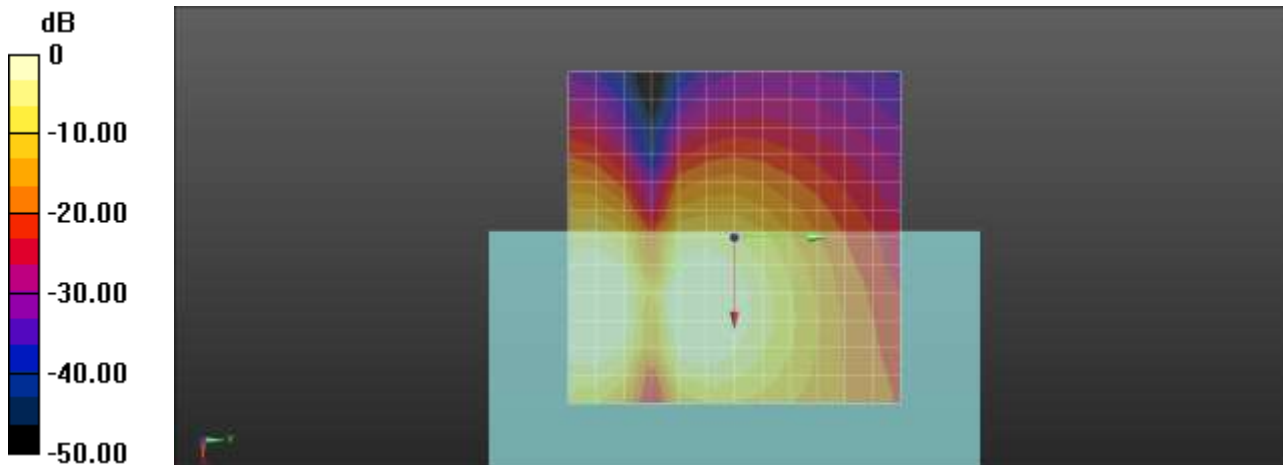

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.91**  
**WCDMA Band 2 9400ch Bitrate 75 z(axial)**

Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 3.17 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -8.3, 3.7 mm

**Cursor:**

ABM2 = -46.94 dBA/m  
Location: 4.2, -8.3, 3.7 mm

**Cursor:**

ABM1/ABM2 = 50.11 dB  
ABM1 comp = 3.17 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -8.3, 3.7 mm

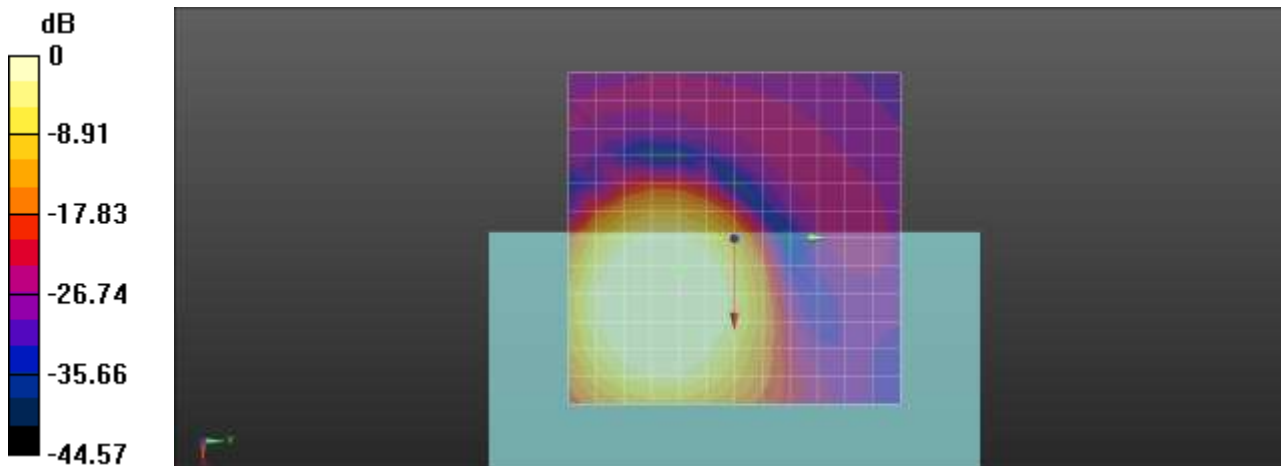

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.92**  
**WCDMA Band 2 9400ch Bitrate 75 Freq.Response**

Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.32 dB  
BWC Factor = 9.47 dB  
Location: 5.8, -8.7, 3.7 mm

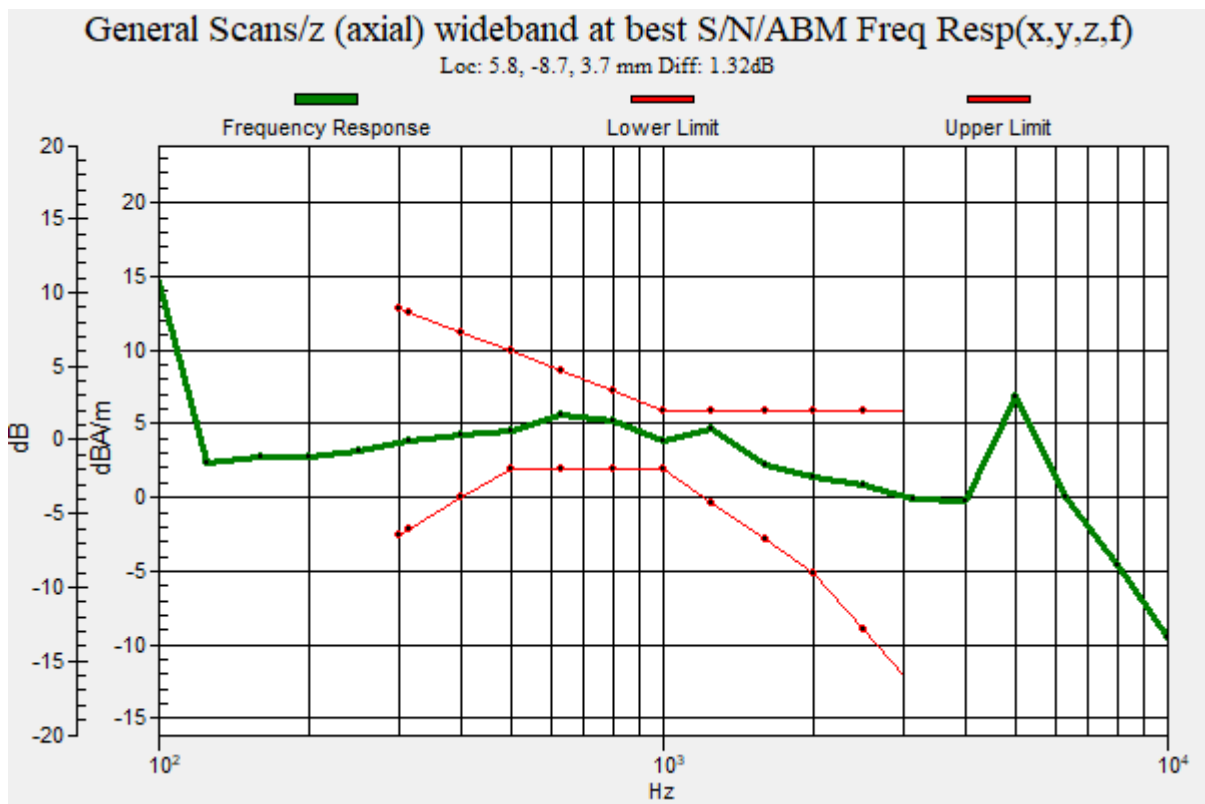

**Plot No.93**

**WCDMA Band 2 9400ch Bitrate 75 y(transversal)**

Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 0.10 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -20.8, 3.7 mm

**Cursor:**

ABM2 = -48.65 dBA/m

Location: 4.2, -20.8, 3.7 mm


**Cursor:**

ABM1/ABM2 = 48.75 dB

ABM1 comp = 0.10 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -20.8, 3.7 mm

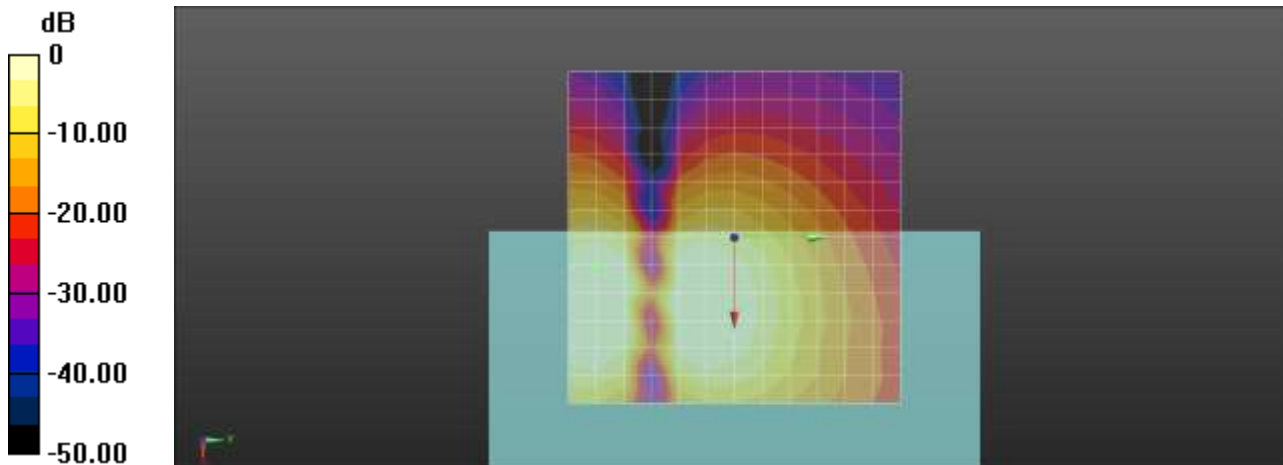

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.94**  
**WCDMA Band 4 1412ch Bitrate 75 z(axial)**

Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:


- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM1 comp = 6.84 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**  
ABM2 = -41.11 dBA/m  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**  
ABM1/ABM2 = 47.96 dB  
ABM1 comp = 6.84 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

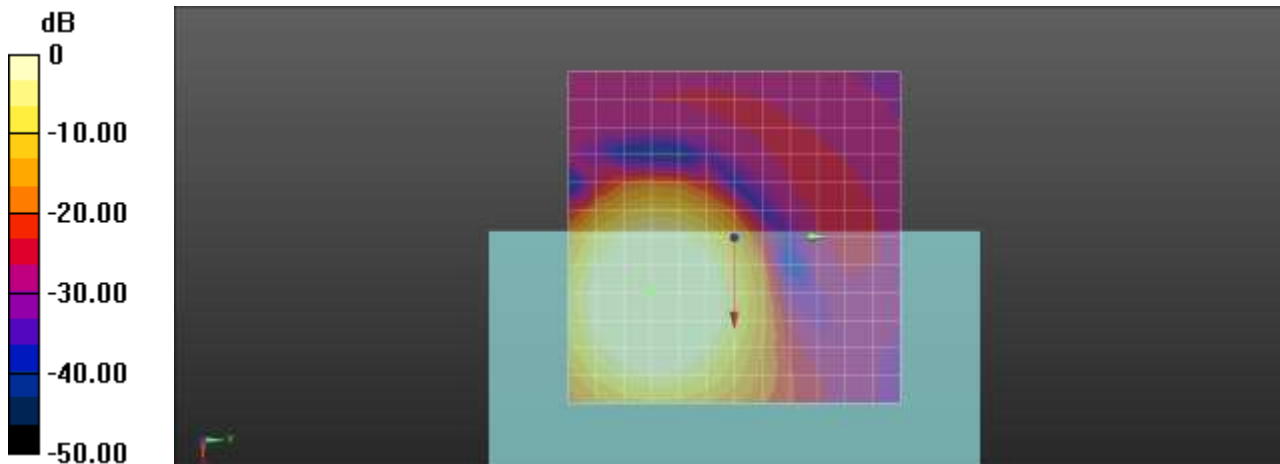

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.95**  
**WCDMA Band 4 1412ch Bitrate 75 Freq.Response**

Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.32 dB  
BWC Factor = 9.47 dB  
Location: 7.6, -12.2, 3.7 mm

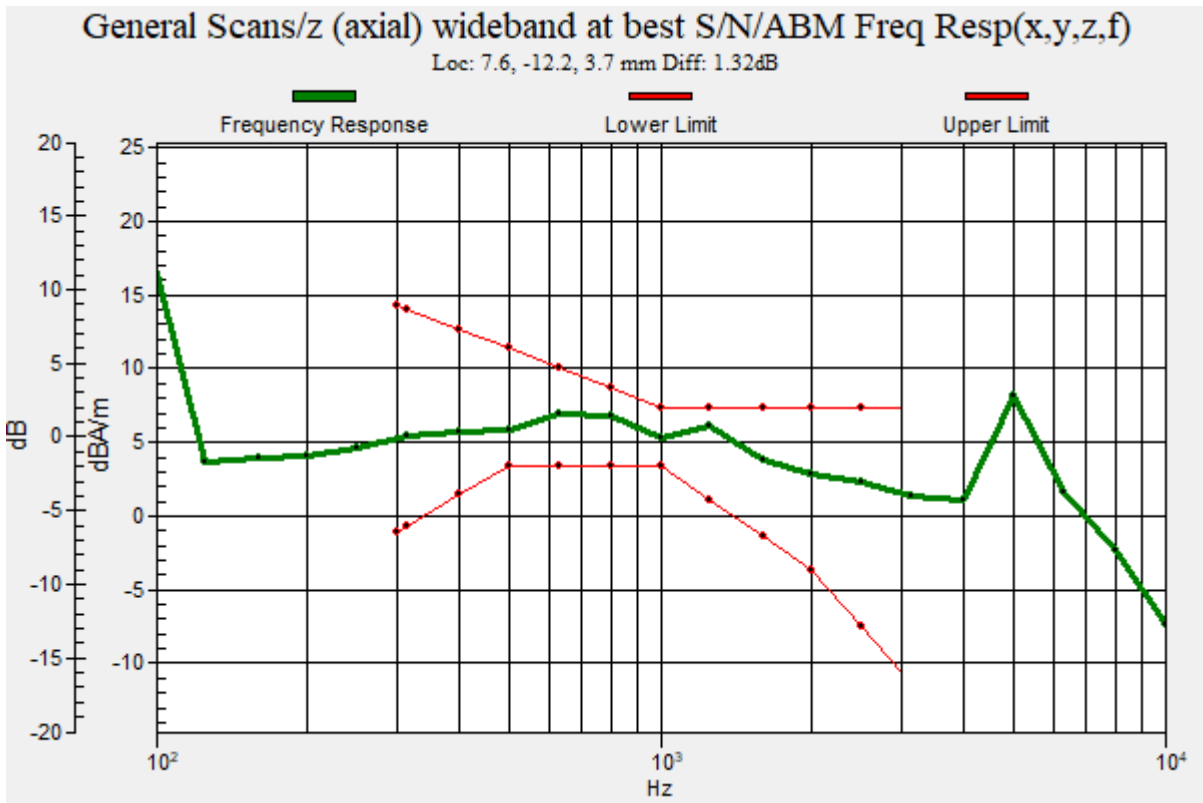



**Plot No.96**  
**WCDMA Band 4 1412ch Bitrate 75 y(transversal)**

Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 0.14 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -20.8, 3.7 mm

**Cursor:**

ABM2 = -46.30 dBA/m  
Location: 4.2, -20.8, 3.7 mm

**Cursor:**

ABM1/ABM2 = 46.44 dB  
ABM1 comp = 0.14 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -20.8, 3.7 mm

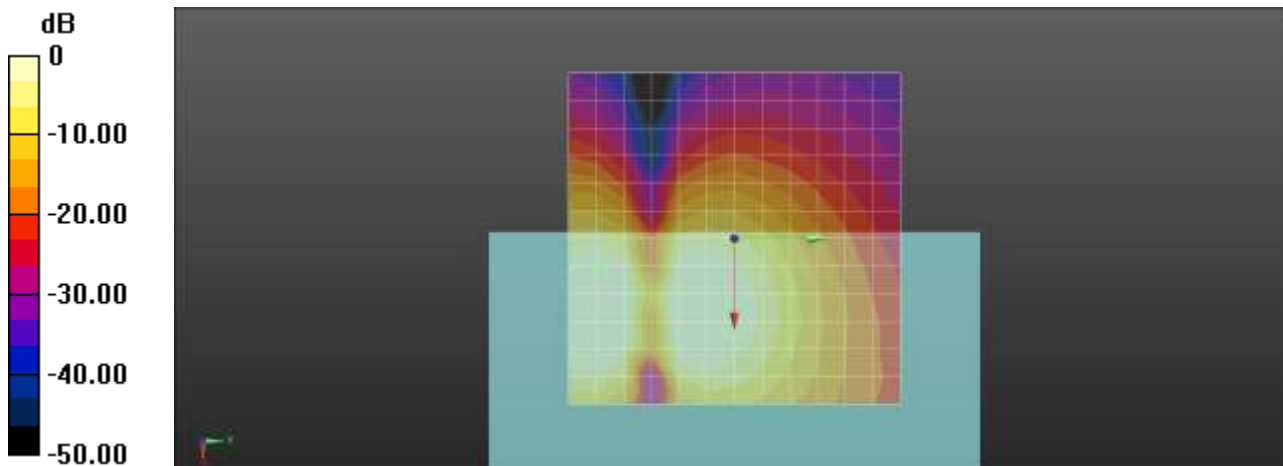

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.97**

**WCDMA Band 5 4183ch Bitrate 75 z(axial)**

Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 4.03 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -12.5, 3.7 mm

**Cursor:**

ABM2 = -46.73 dBA/m

Location: 4.2, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 50.77 dB

ABM1 comp = 4.03 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -12.5, 3.7 mm

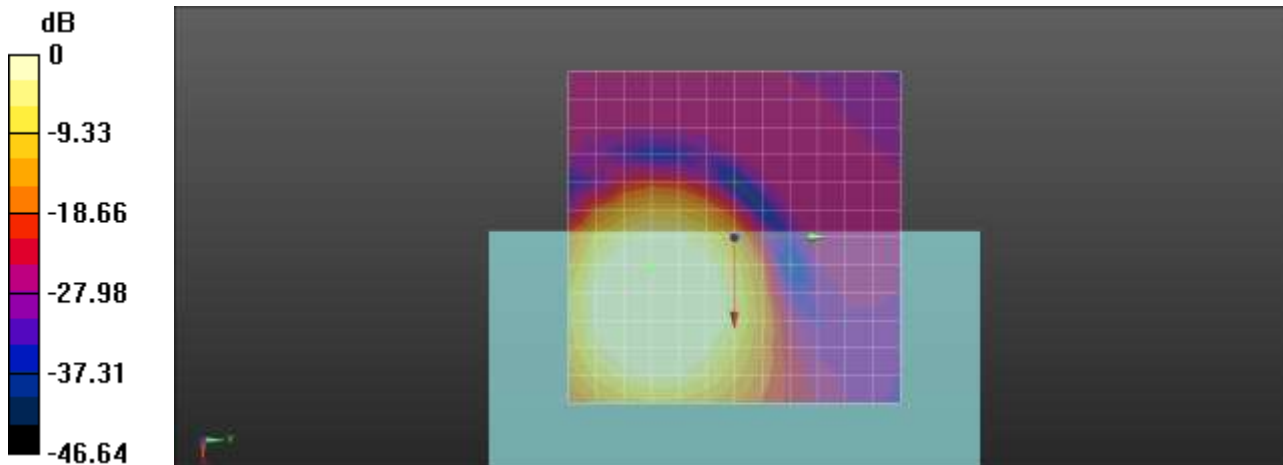

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.98**  
**WCDMA Band 5 4183ch Bitrate 75 Freq.Response**

Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.30 dB  
BWC Factor = 9.47 dB  
Location: 4.7, -11.6, 3.7 mm

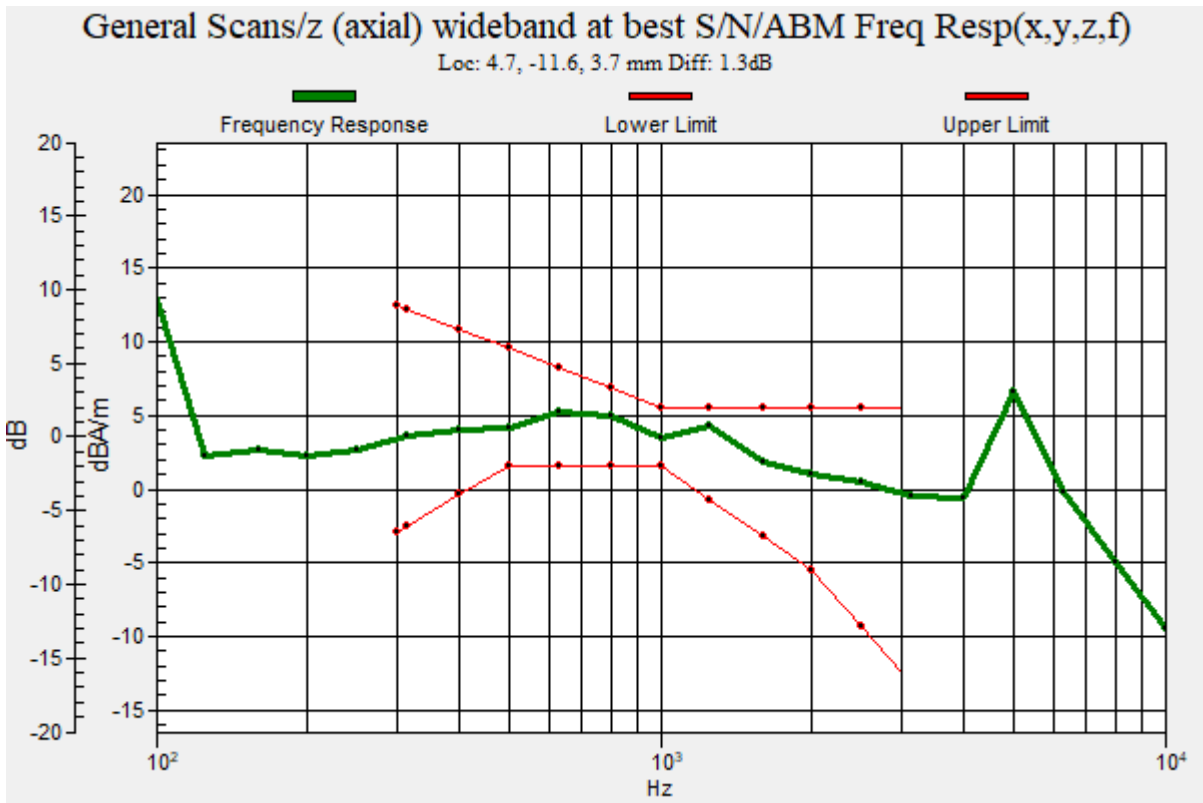

**Plot No.99**

**WCDMA Band 5 4183ch Bitrate 75 y(transversal)**

Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -0.13 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -20.8, 3.7 mm

**Cursor:**

ABM2 = -48.52 dBA/m  
Location: 4.2, -20.8, 3.7 mm

**Cursor:**

ABM1/ABM2 = 48.39 dB  
ABM1 comp = -0.13 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -20.8, 3.7 mm

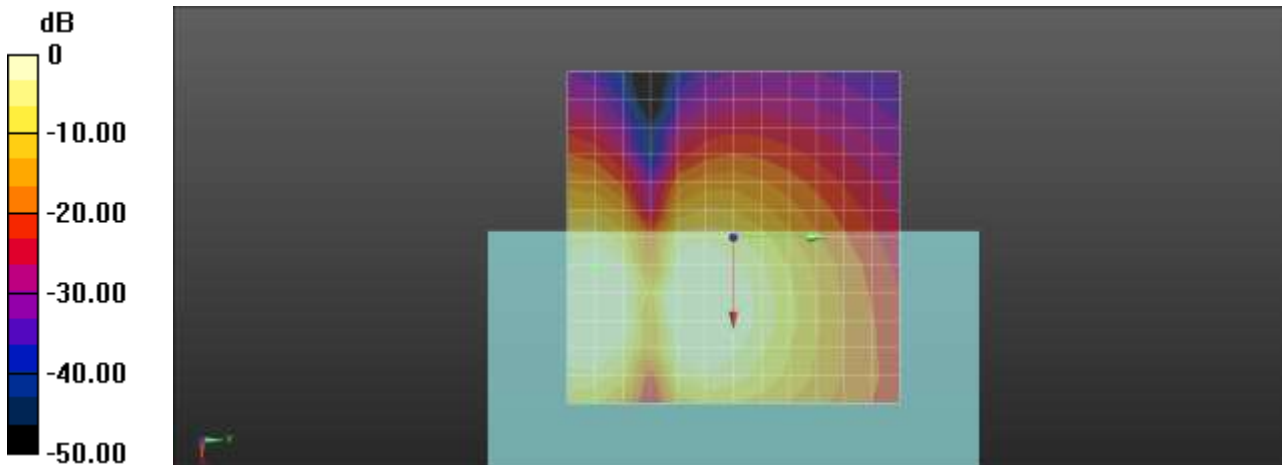

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.100**

**LTE 2 16QAM 5MHz 1RB 12offset 18900ch Bit rate 75 z(axial)**

Communication System: UID 0, LTE Band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 4.60 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -42.25 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 46.85 dB

ABM1 comp = 4.60 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

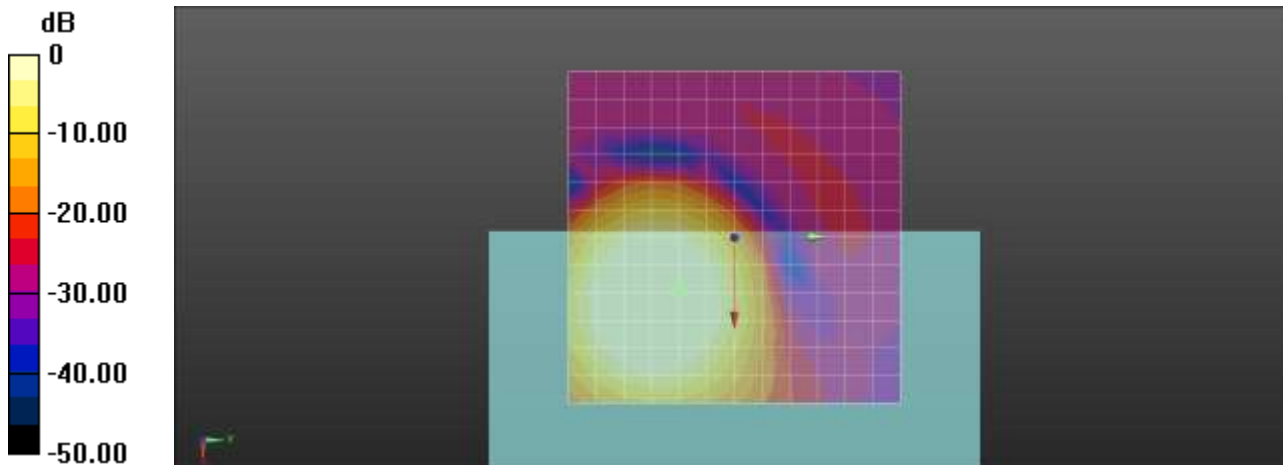

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.101**

**LTE 2 16QAM 5MHz 1RB 12offset 18900ch Bit rate 75 Freq.Response**

Communication System: UID 0, LTE Band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav

Output Gain: 58.8

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.23 dB

BWC Factor = 9.47 dB

Location: 8.4, -9.2, 3.7 mm

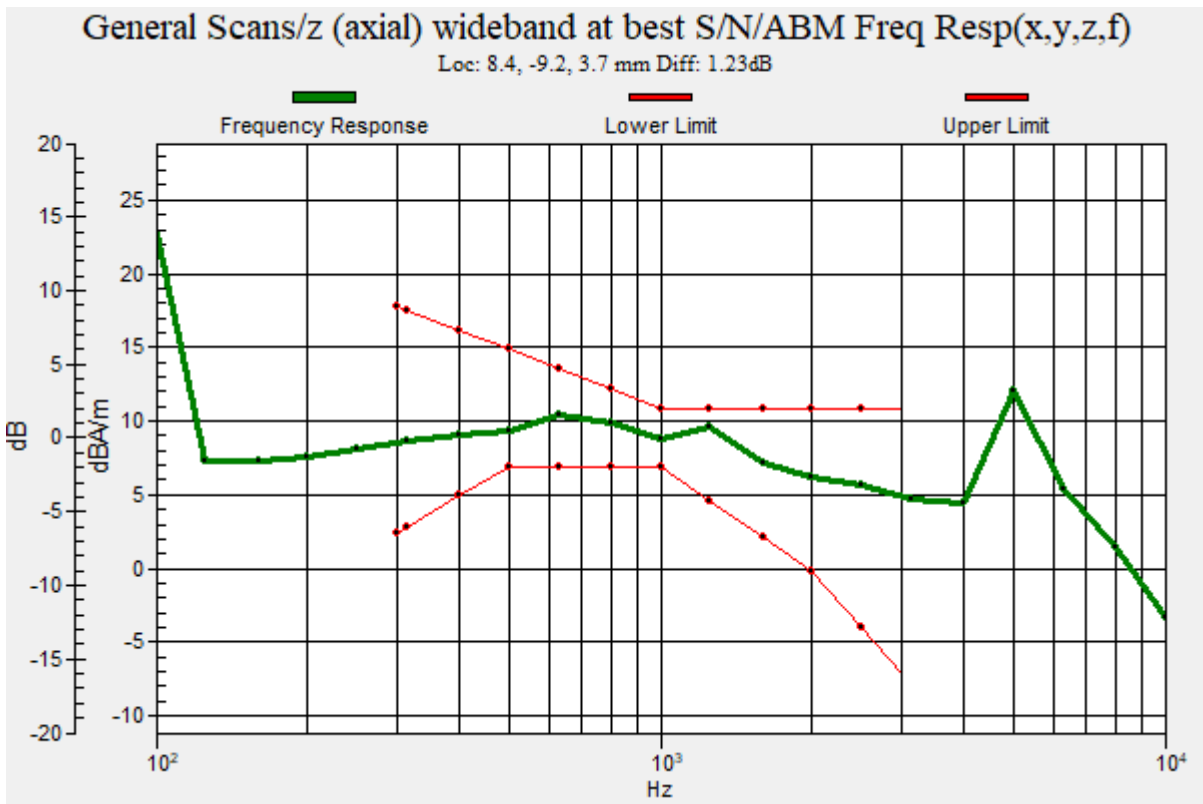

**Plot No.102**

**LTE 2 16QAM 5MHz 1RB 12offset 18900ch Bit rate 75y(transversal)**

Communication System: UID 0, LTE Band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 1.91 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -43.10 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 45.01 dB

ABM1 comp = 1.91 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

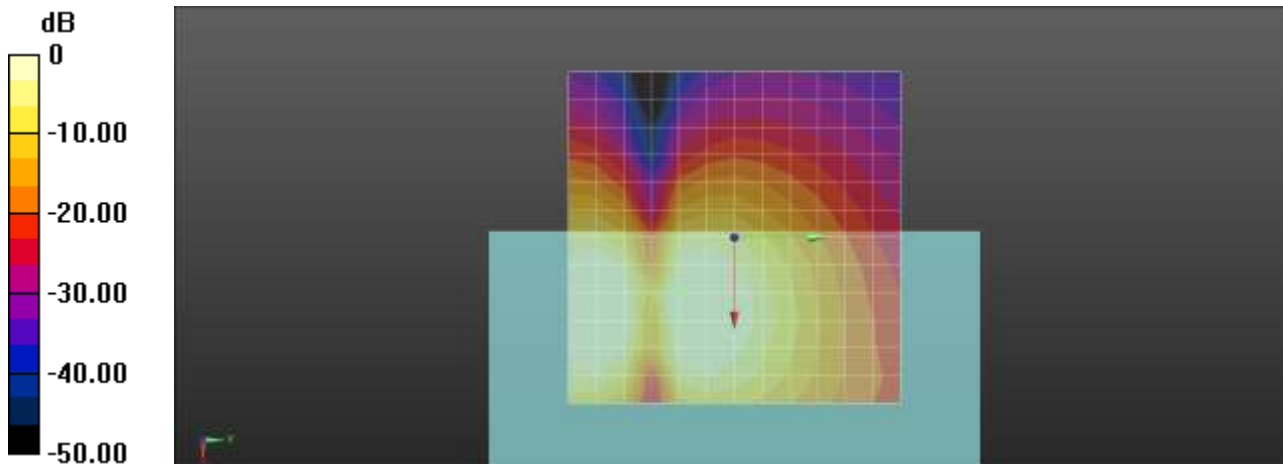

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.103**

**LTE 4 16QAM 5MHz 1RB 12offset 20175ch Bit rate 75 z(axial)**

Communication System: UID 0, LTE Band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 5.90 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -41.80 dBA/m

Location: 8.3, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 47.70 dB

ABM1 comp = 5.90 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

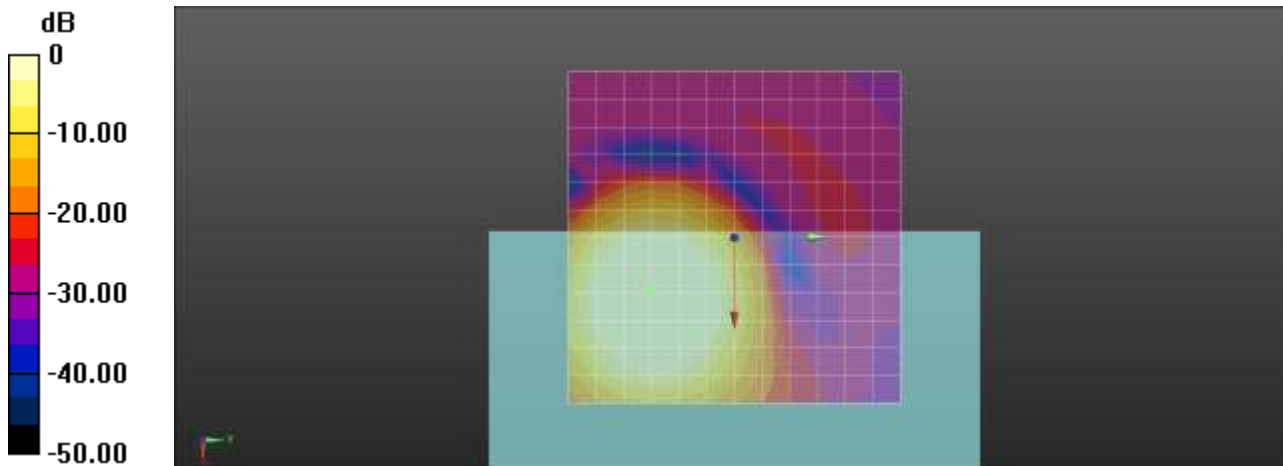

0 dB = 1.000 A/m = 0.00 dBA/m



**Plot No.104**

**LTE 4 16QAM 5MHz 1RB 12offset 20175ch Bit rate 75 Freq.Response**

Communication System: UID 0, LTE Band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav

Output Gain: 58.8

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.26 dB

BWC Factor = 9.47 dB

Location: 8, -12.1, 3.7 mm

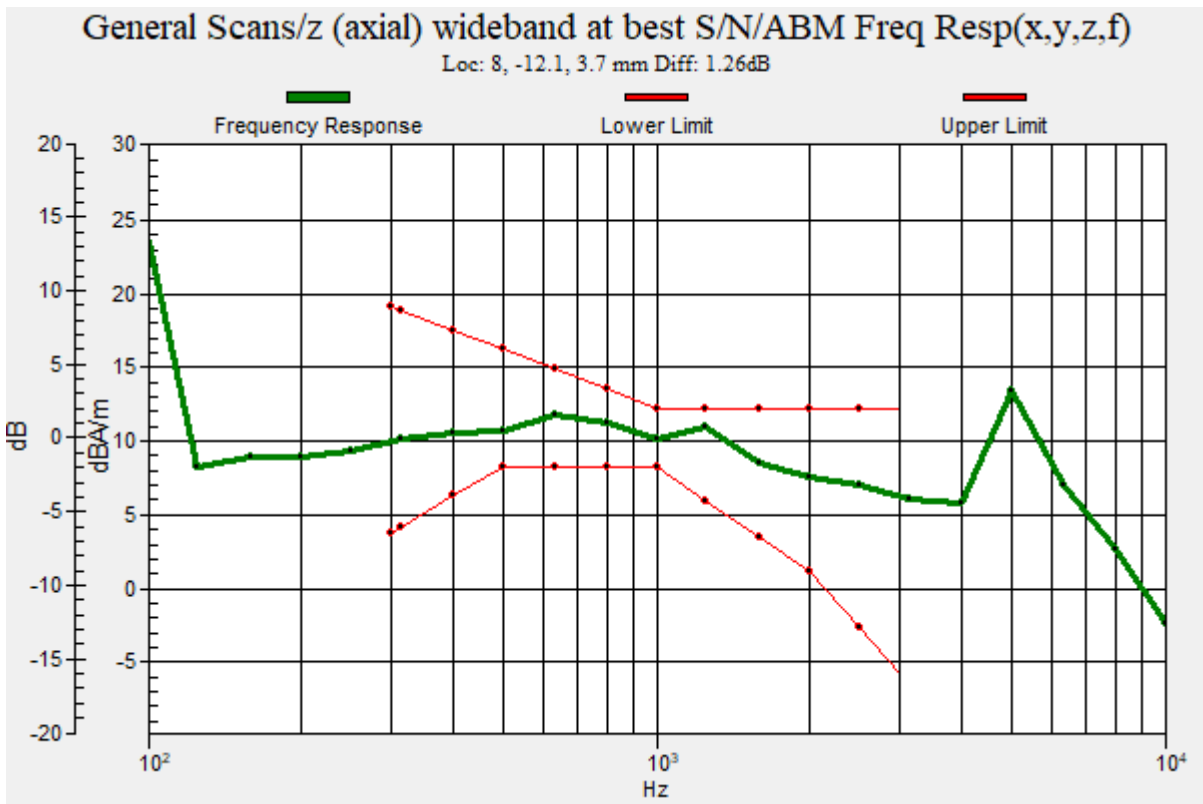

**Plot No.105**  
**LTE 4 16QAM 5MHz 1RB 12offset 20175ch Bit rate 75 y(transversal)**

Communication System: UID 0, LTE Band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 1.73 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -43.59 dBA/m  
Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM1/ABM2 = 45.31 dB  
ABM1 comp = 1.73 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -8.3, 3.7 mm

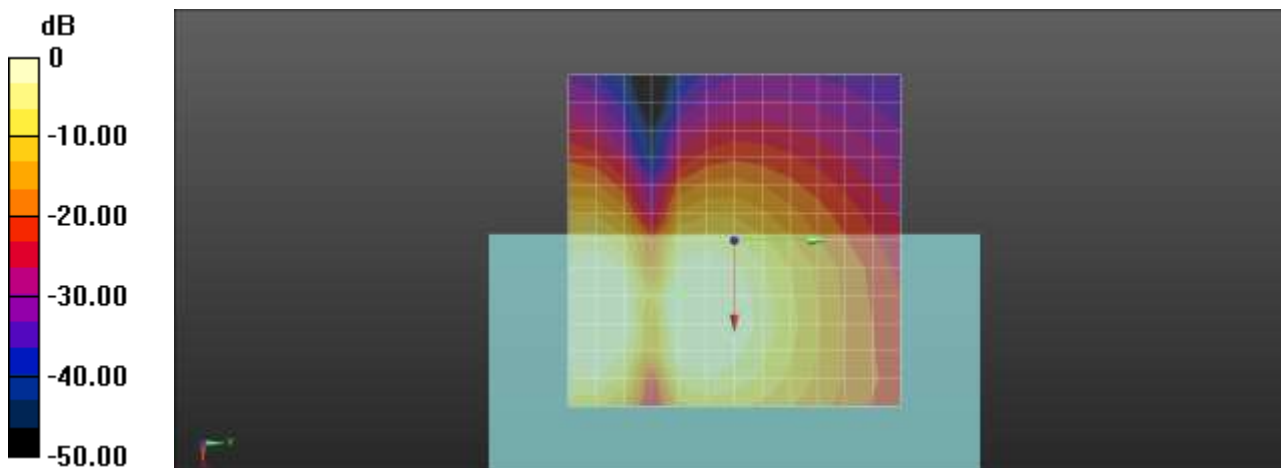

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.106**

**LTE 5 16QAM 5MHz 1RB 12offset 20525ch Bit rate 75 z(axial)**

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 5.89 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -41.54 dBA/m

Location: 8.3, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 47.43 dB

ABM1 comp = 5.89 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

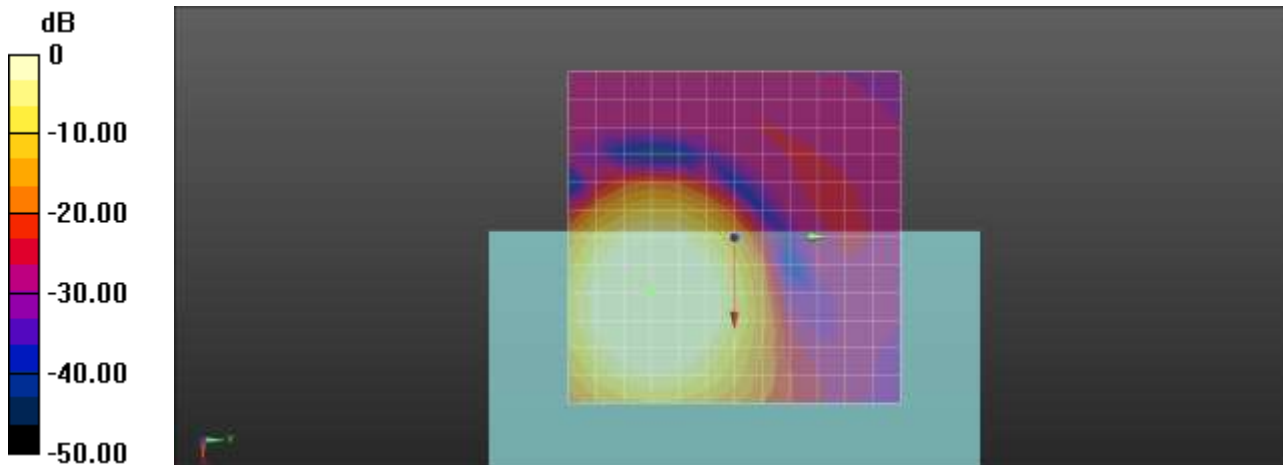

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.107**

**LTE 5 16QAM 5MHz 1RB 12offset 20525ch Bit rate 75 Freq.Response**

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav

Output Gain: 58.8

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.25 dB

BWC Factor = 9.47 dB

Location: 6.7, -12.2, 3.7 mm

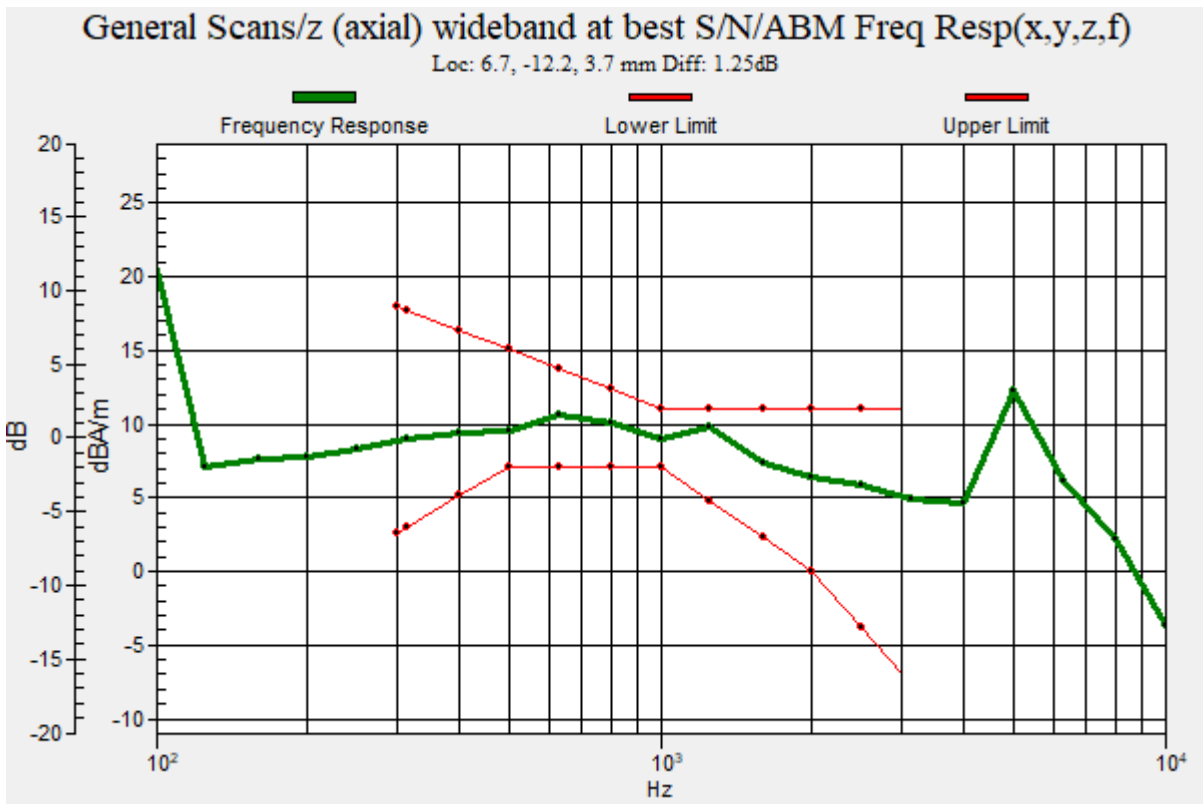

**Plot No.108**

**LTE 5 16QAM 5MHz 1RB 12offset 20525ch Bit rate 75 y(transversal)**

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 1.94 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -43.92 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 45.86 dB

ABM1 comp = 1.94 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

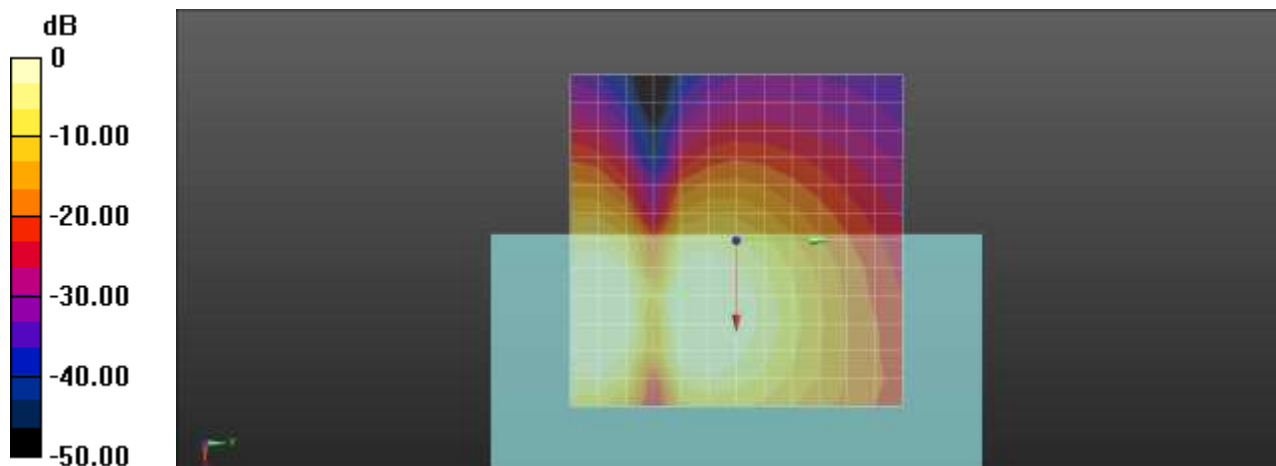

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.109**

**LTE 7 16QAM 5MHz 1RB 12offset 21100ch Bit rate 75 z(axial)**

Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 5.77 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -41.25 dBA/m

Location: 8.3, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 47.02 dB

ABM1 comp = 5.77 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

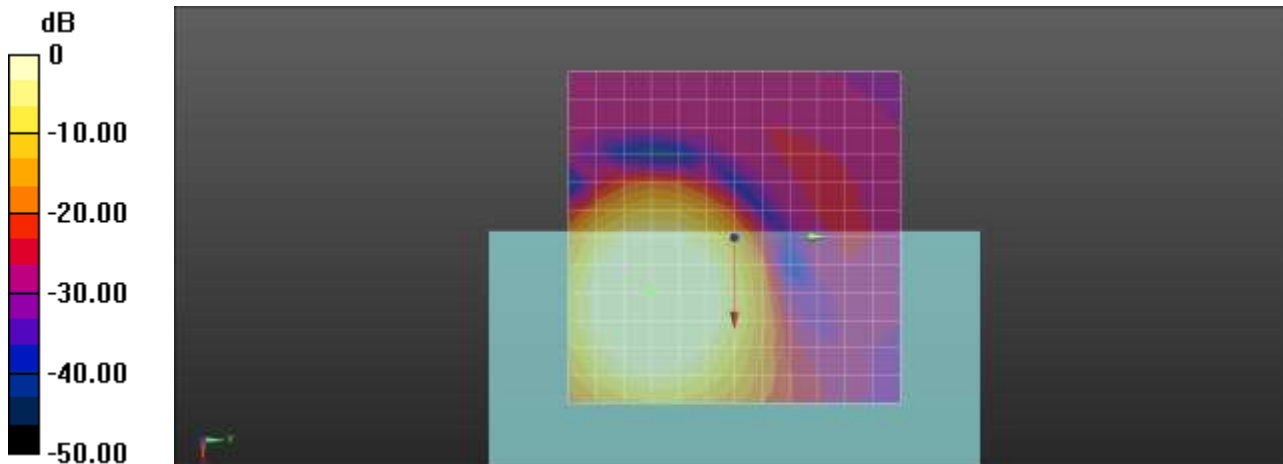

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.110**

**LTE 7 16QAM 5MHz 1RB 12offset 21100ch Bit rate 75 Freq.Response**

Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav

Output Gain: 58.8

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.25 dB

BWC Factor = 9.47 dB

Location: 8.3, -12.5, 3.7 mm

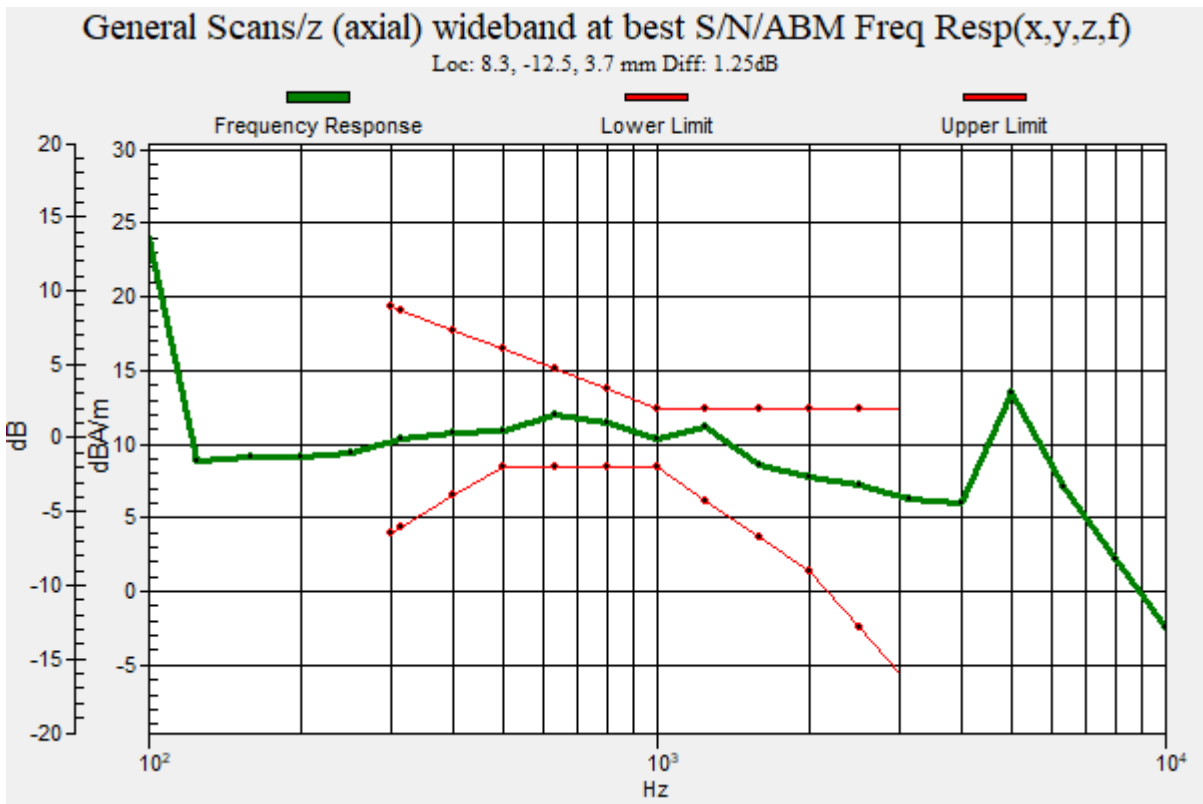

**Plot No.111**

**LTE 7 16QAM 5MHz 1RB 12offset 21100ch Bit rate 75 y(transversal)**

Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 1.92 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -42.50 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 44.42 dB

ABM1 comp = 1.92 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

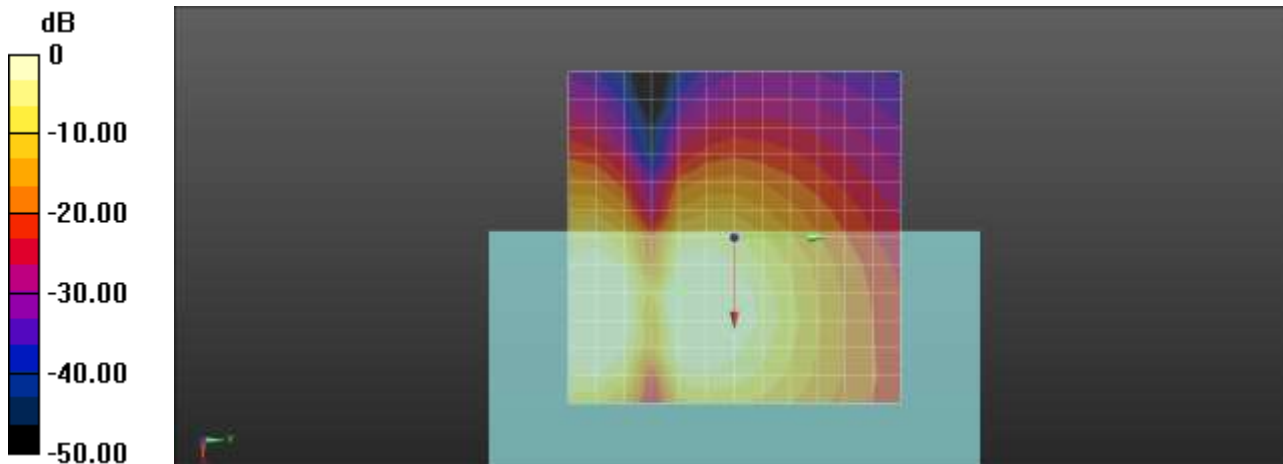

0 dB = 1.000 A/m = 0.00 dBA/m



**Plot No.112**  
**LTE 12 16QAM 5MHz 1RB 12offset 23095ch Bit rate 75 z(axial)**

Communication System: UID 0, LTE Band12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:


- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM1 comp = 4.70 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -8.3, 3.7 mm

**Cursor:**  
ABM2 = -42.53 dBA/m  
Location: 8.3, -8.3, 3.7 mm

**Cursor:**  
ABM1/ABM2 = 47.23 dB  
ABM1 comp = 4.70 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -8.3, 3.7 mm

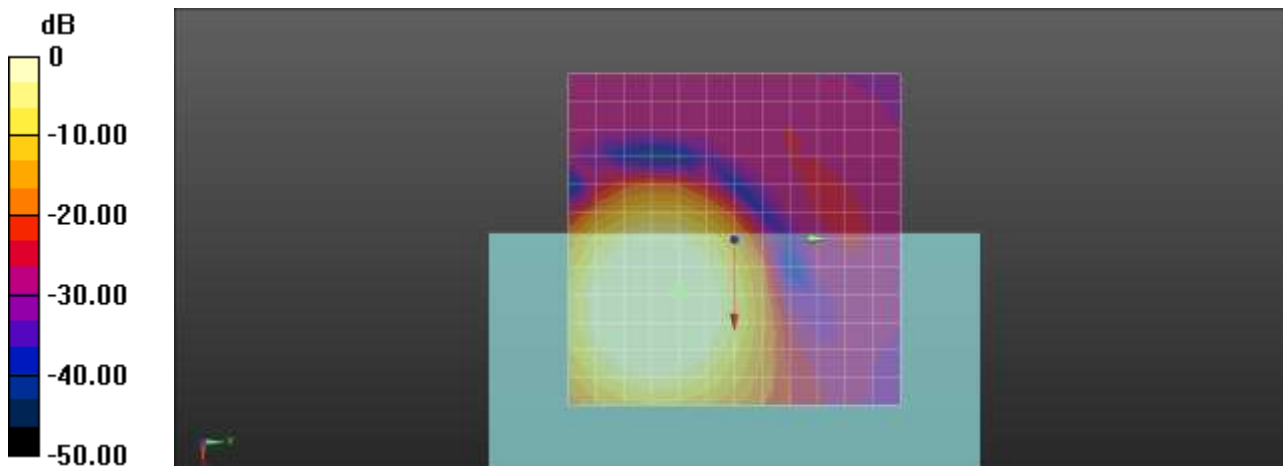

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.113**  
**LTE 12 16QAM 5MHz 1RB 12offset 23095ch Bit rate 75 Freq.Response**

Communication System: UID 0, LTE Band12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.25 dB  
BWC Factor = 9.47 dB  
Location: 7.5, -9.5, 3.7 mm

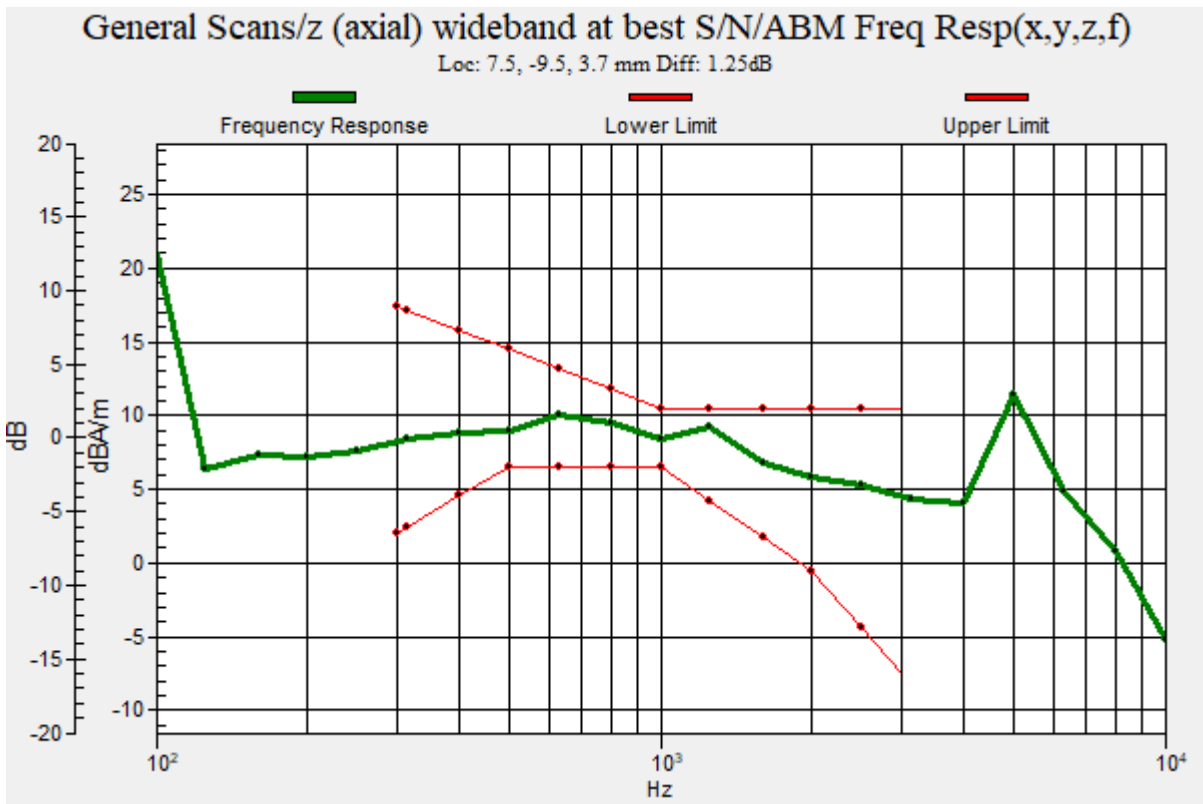

**Plot No.114**

**LTE 12 16QAM 5MHz 1RB 12offset 23095ch Bit rate 75 y(transversal)**

Communication System: UID 0, LTE Band12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 1.90 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -44.00 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 45.90 dB

ABM1 comp = 1.90 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

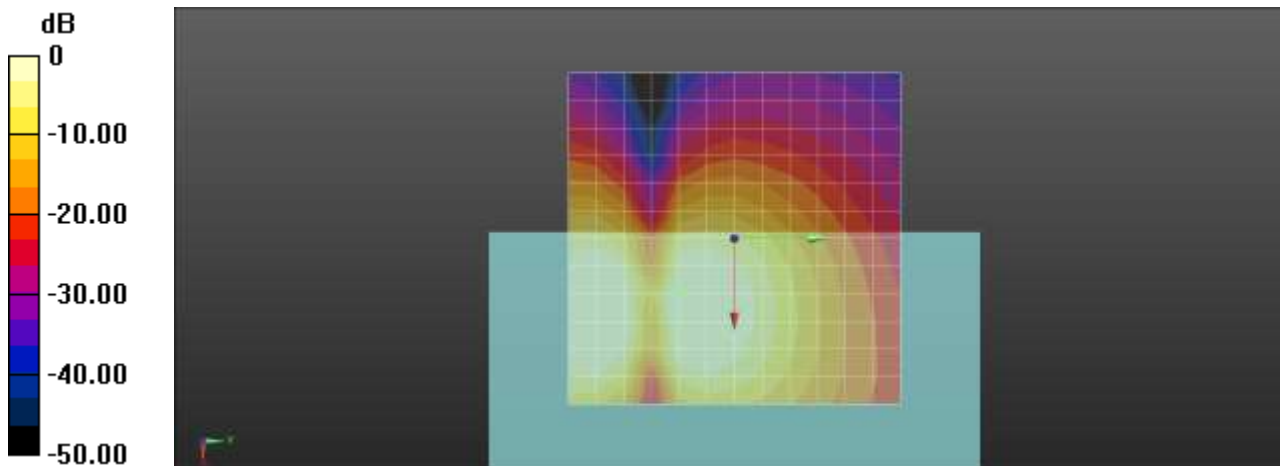

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.115**

**LTE 13 16QAM 5MHz 1RB 12offset 23230ch Bit rate 75 z(axial)**

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 6.05 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -40.66 dBA/m

Location: 8.3, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 46.70 dB

ABM1 comp = 6.05 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

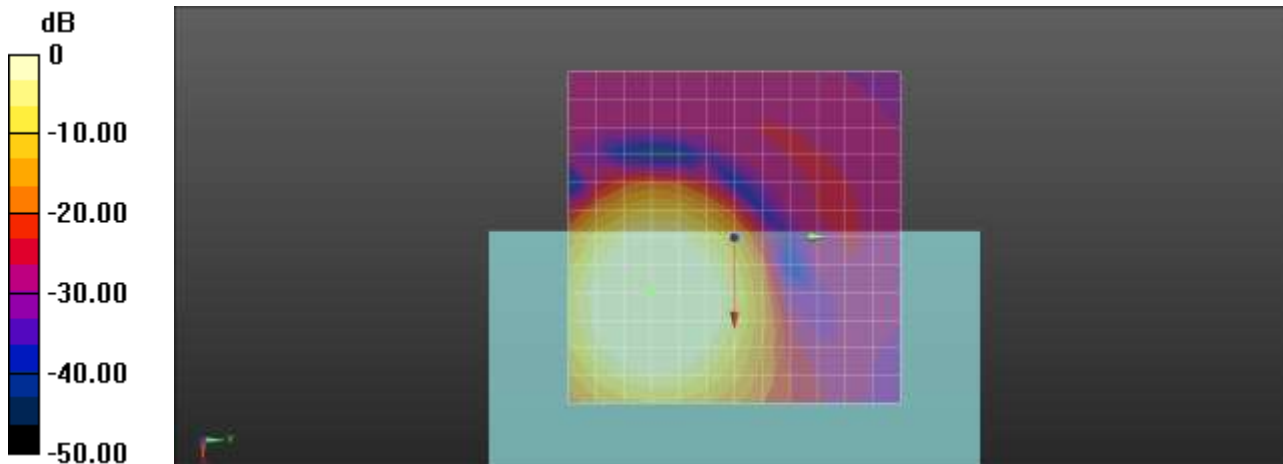

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.116**  
**LTE 13 16QAM 5MHz 1RB 12offset 23230ch Bit rate 75 Freq.Response**

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.25 dB  
BWC Factor = 9.47 dB  
Location: 8.2, -12.2, 3.7 mm

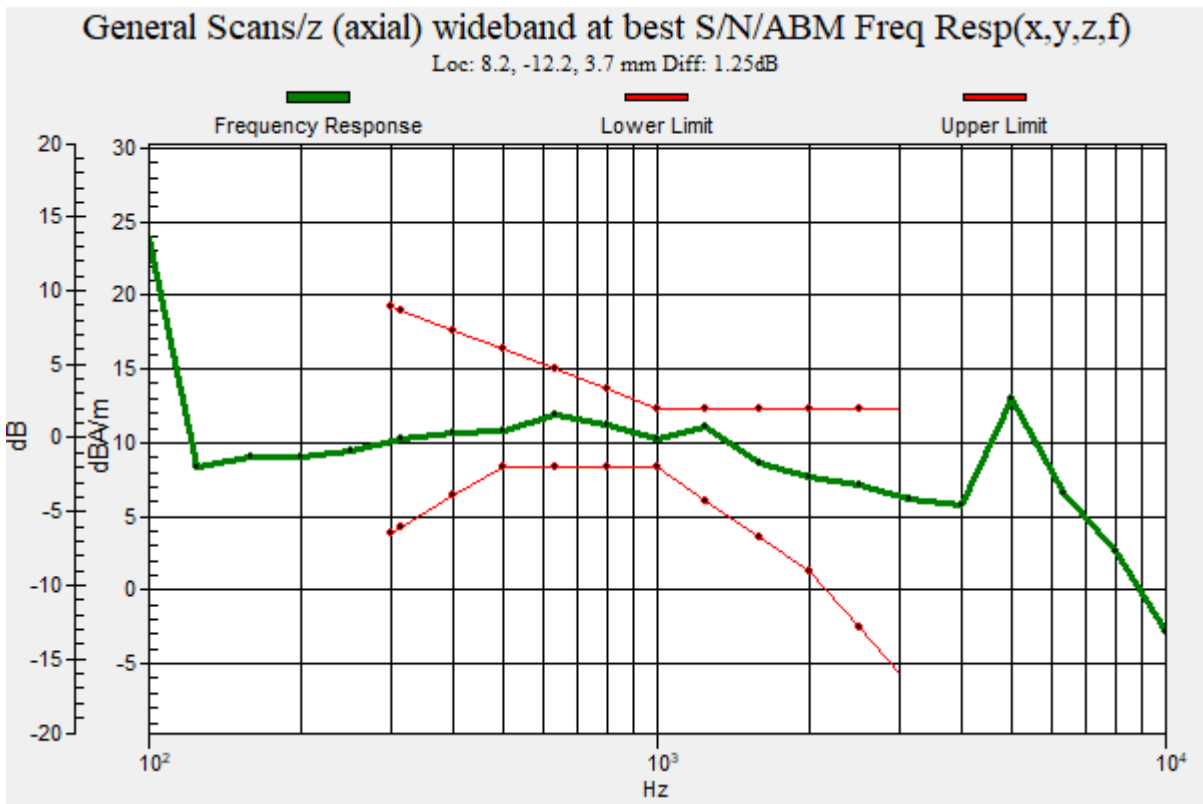

**Plot No.117**  
**LTE 13 16QAM 5MHz 1RB 12offset Bit rate 75 y(transversal)**

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:


- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM1 comp = 2.15 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -8.3, 3.7 mm

**Cursor:**  
ABM2 = -42.88 dBA/m  
Location: 8.3, -8.3, 3.7 mm

**Cursor:**  
ABM1/ABM2 = 45.03 dB  
ABM1 comp = 2.15 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -8.3, 3.7 mm

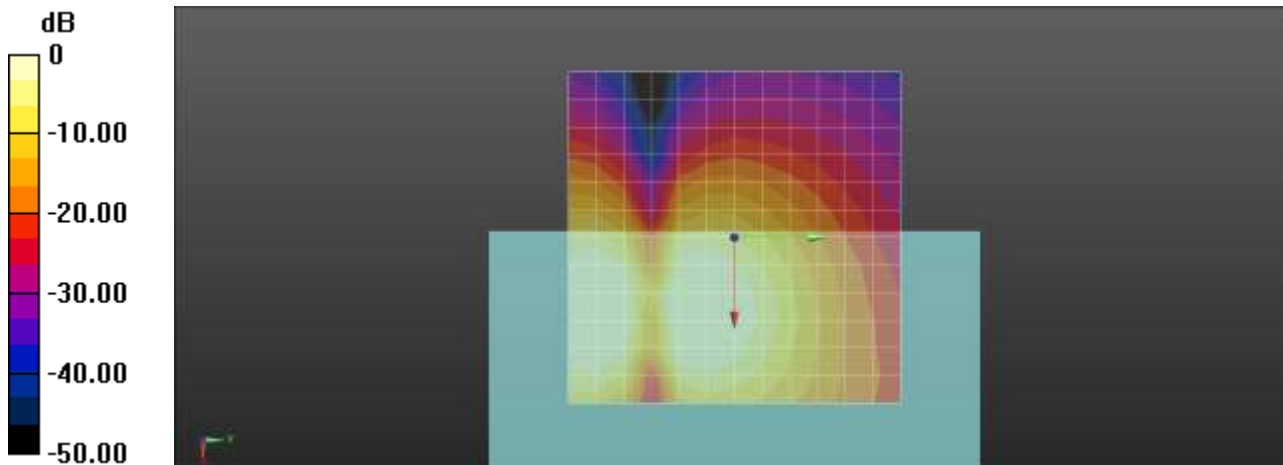

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.118**  
**LTE 14 16QAM 5MHz 1RB 12offset 23330ch Bit rate 75 z(axial)**

Communication System: UID 0, LTE Band 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:


- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM1 comp = 5.94 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**  
ABM2 = -41.28 dBA/m  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**  
ABM1/ABM2 = 47.21 dB  
ABM1 comp = 5.94 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

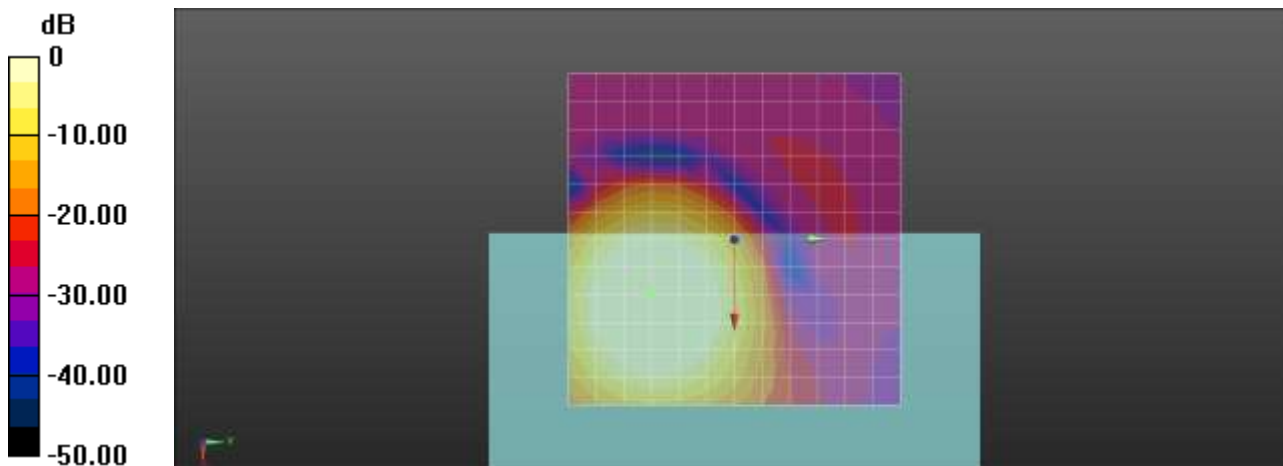

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.119**

**LTE 14 16QAM 5MHz 1RB 12offset 23330ch Bit rate 75 Freq.Response**

Communication System: UID 0, LTE Band 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 58.8  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.27 dB  
 BWC Factor = 9.47 dB  
 Location: 8, -11.7, 3.7 mm

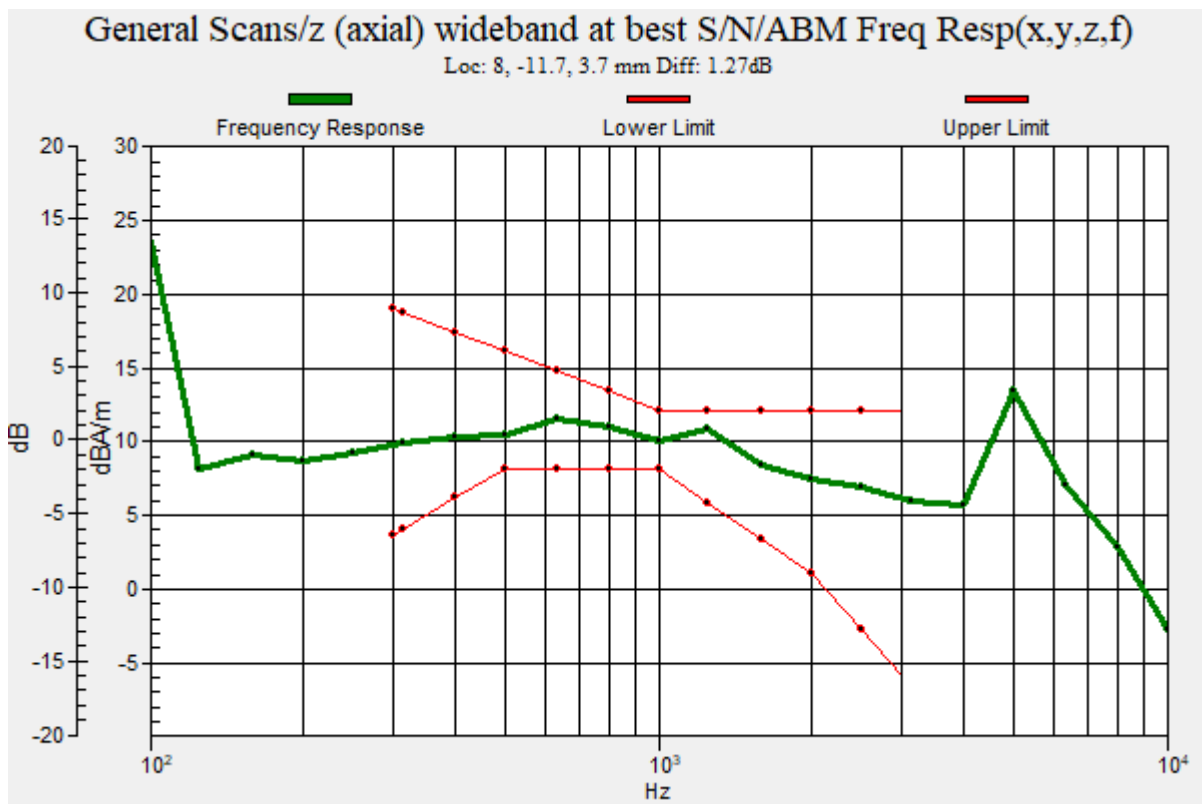



**Plot No.120**

**LTE 14 16QAM 5MHz 1RB 12offset 23330ch Bit rate 75 y(transversal)**

Communication System: UID 0, LTE Band 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 1.83 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -43.35 dBA/m

Location: 8.3, -8.3, 3.7 mm



**Cursor:**

ABM1/ABM2 = 45.18 dB

ABM1 comp = 1.83 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

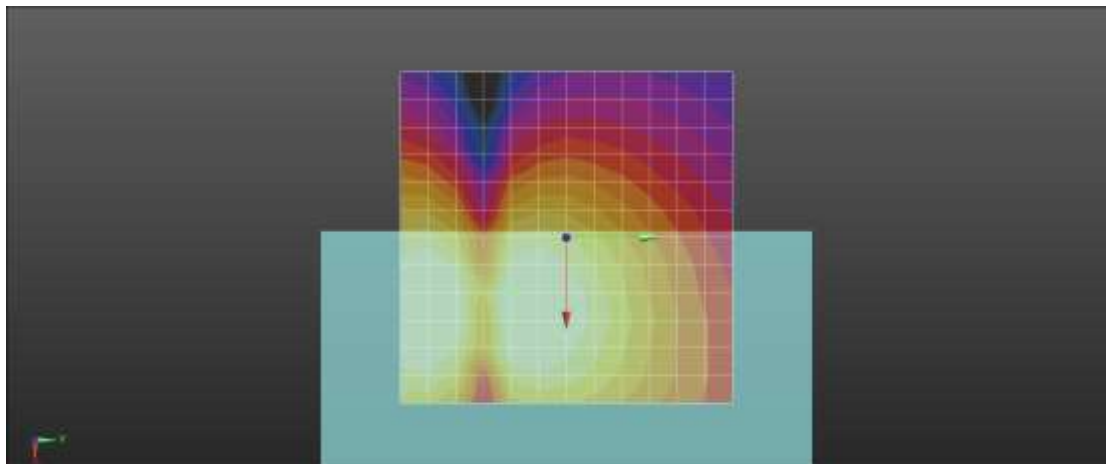

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.121**

**LTE 25 16QAM 5MHz 1RB 12offset 26365ch Bitrate 75 z(axial)**

Communication System: UID 0, LTE Band 25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 5.83 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -41.45 dBA/m

Location: 8.3, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 47.29 dB

ABM1 comp = 5.83 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

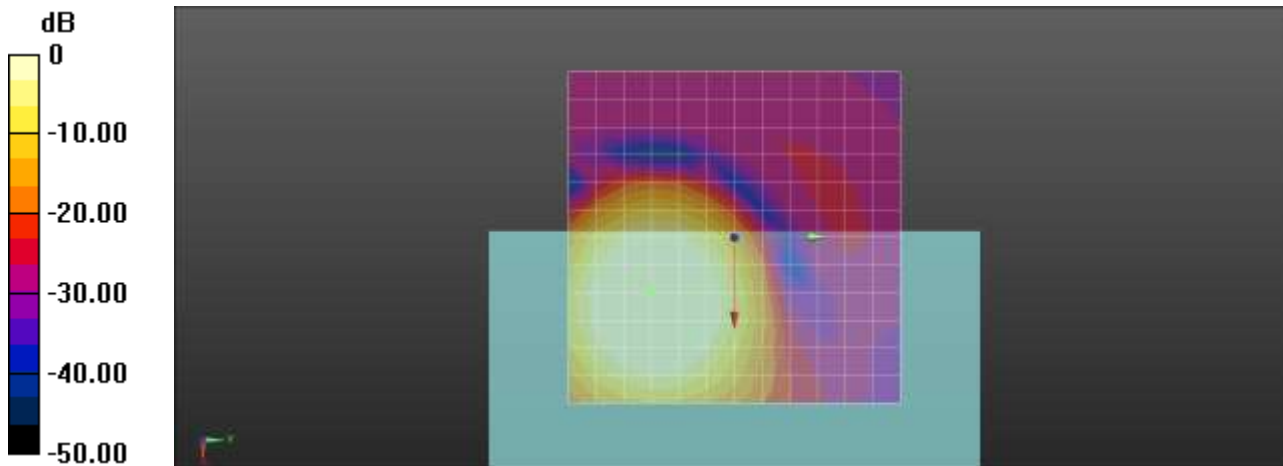

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.122**

**LTE 25 16QAM 5MHz 1RB 12offset 26365ch Bitrate 75 Freq.Response**

Communication System: UID 0, LTE Band 25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 58.8  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.24 dB  
 BWC Factor = 9.47 dB  
 Location: 8.2, -11.4, 3.7 mm

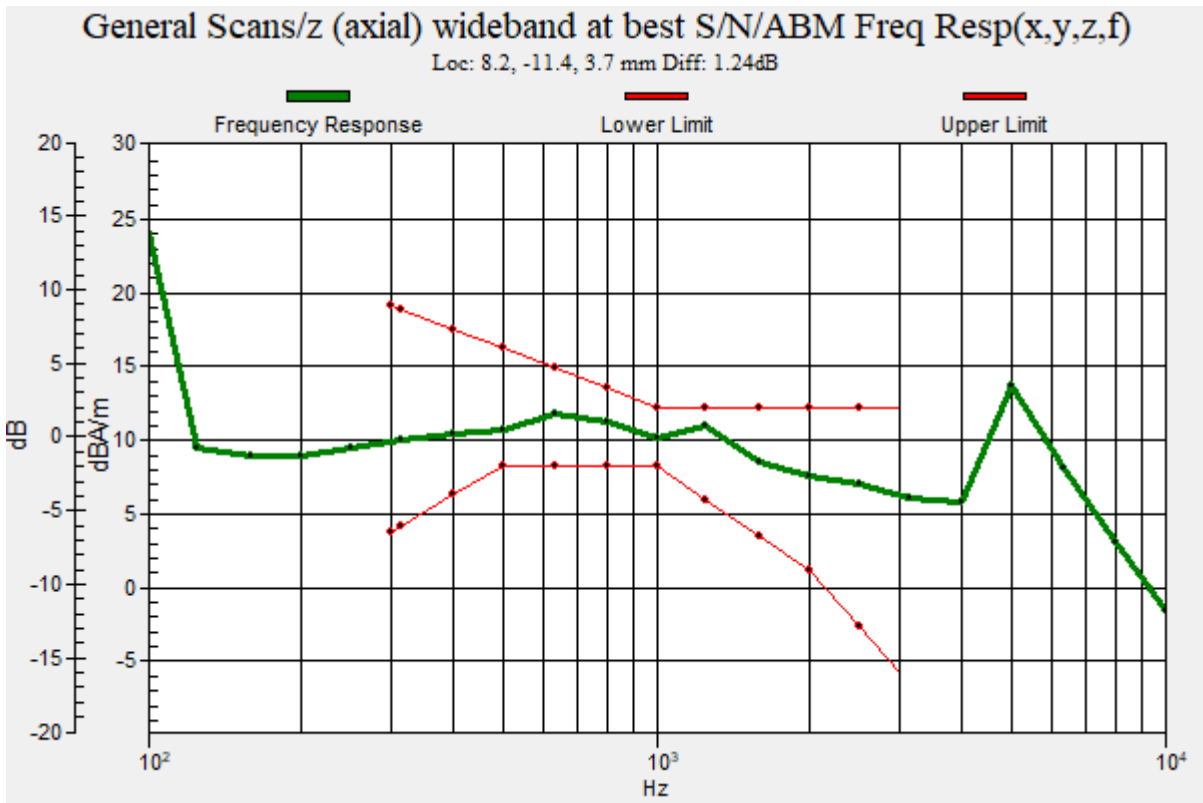

**Plot No.123**

**LTE 25 16QAM 5MHz 1RB 12offset 26365ch Bitrate 75 y(transversal)**

Communication System: UID 0, LTE Band 25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 1.78 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -43.17 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 44.95 dB

ABM1 comp = 1.78 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

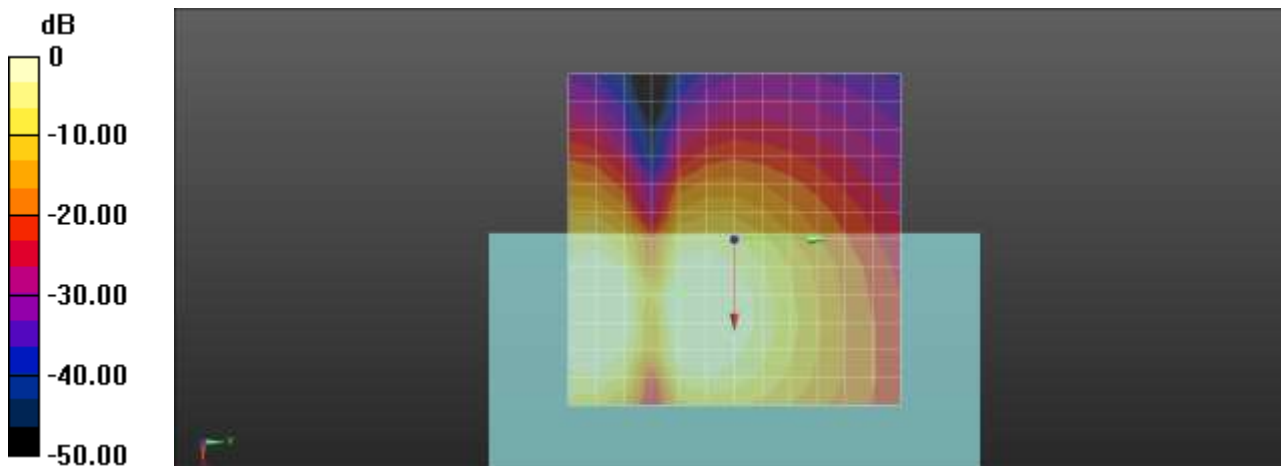

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.124**

**LTE 26 16QAM 5MHz 1RB 12offset t 26865ch Bit rate 75 z(axial)**

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 3.61 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -12.5, 3.7 mm

**Cursor:**

ABM2 = -43.65 dBA/m

Location: 4.2, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 47.26 dB

ABM1 comp = 3.61 dBA/m

BWC Factor = 0.15 dB

Location: 4.2, -12.5, 3.7 mm

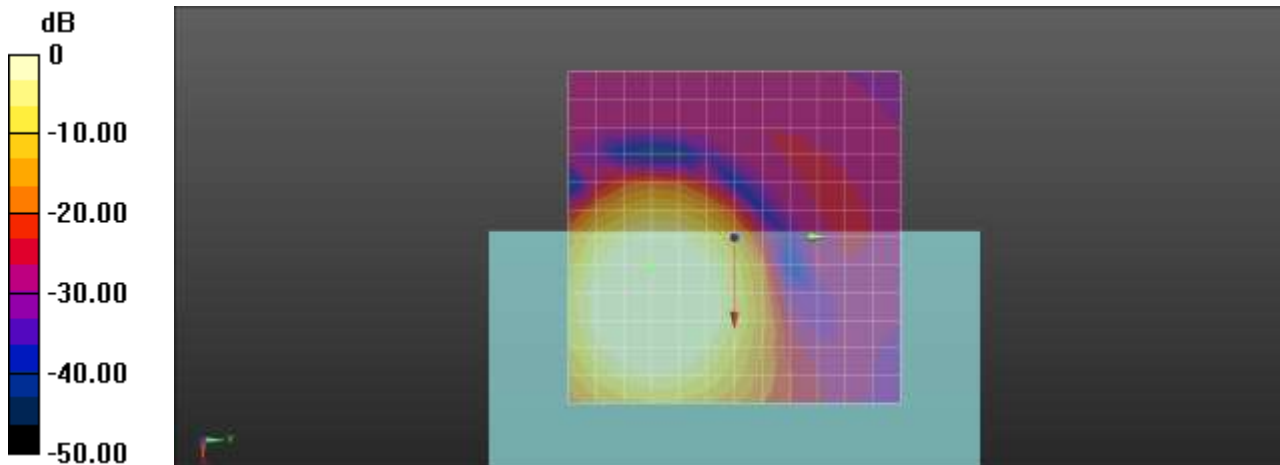

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.125**  
**LTE 26 16QAM 5MHz 1RB 12offset 26865ch Bit rate 75 Freq.Response**

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.22 dB  
BWC Factor = 9.47 dB  
Location: 6.5, -9.3, 3.7 mm

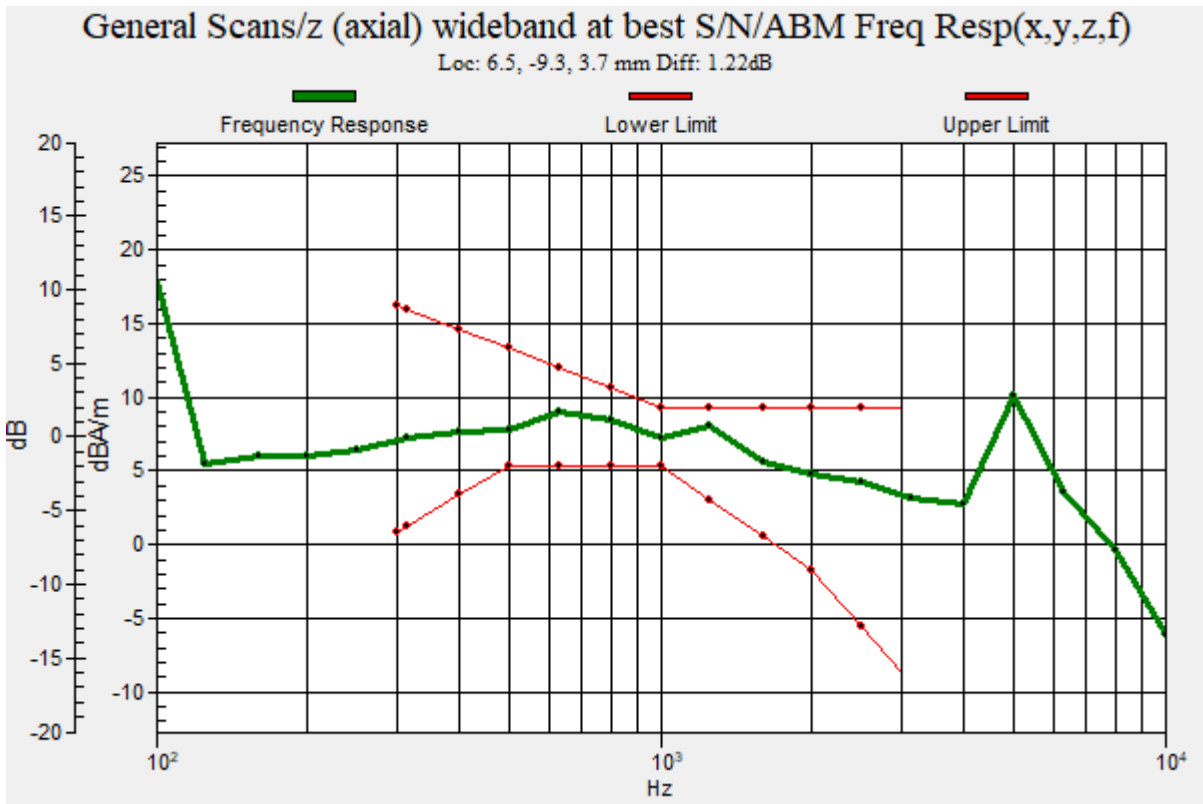

**Plot No.126**

**LTE 26 16QAM 5MHz 1RB 12offset 26865ch Bit rate 75 y(transversal)**

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 2.11 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -43.75 dBA/m

Location: 8.3, -8.3, 3.7 mm



**Cursor:**

ABM1/ABM2 = 45.86 dB

ABM1 comp = 2.11 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

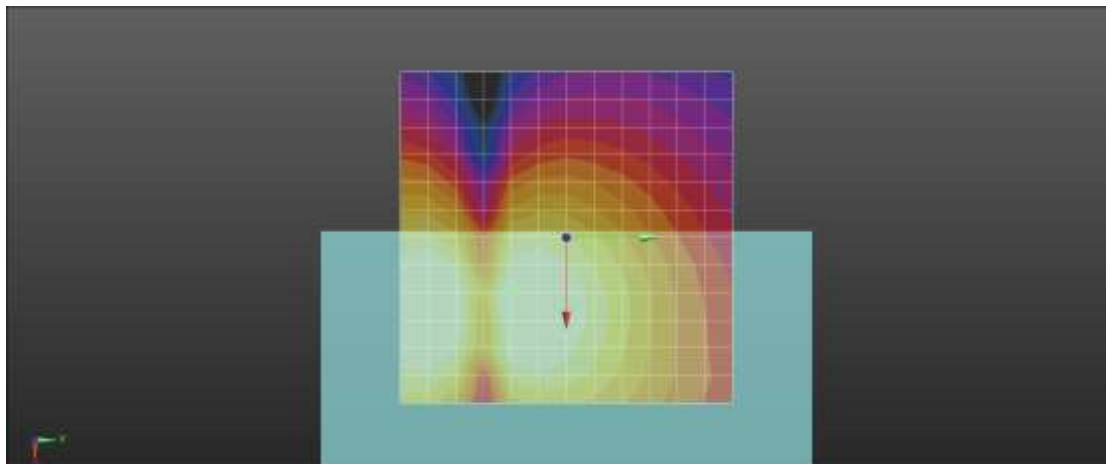

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.127**

**LTE 30 16QAM 5MHz 1RB 12offset 27710ch Bit rate 75 z(axial)**

Communication System: UID 0, LTE Band30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 5.76 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -40.86 dBA/m

Location: 8.3, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 46.62 dB

ABM1 comp = 5.76 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

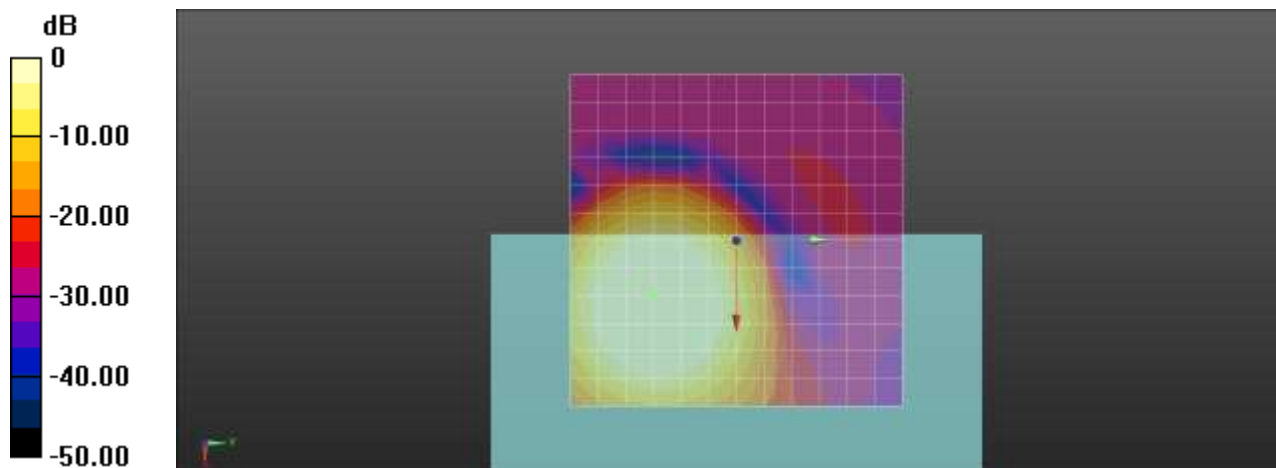

0 dB = 1.000 A/m = 0.00 dBA/m




**Plot No.128**  
**LTE 30 16QAM 5MHz 1RB 12offset 27710ch Bit rate 75 Freq.Response**

Communication System: UID 0, LTE Band30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.23 dB  
BWC Factor = 9.47 dB  
Location: 8.8, -11.2, 3.7 mm

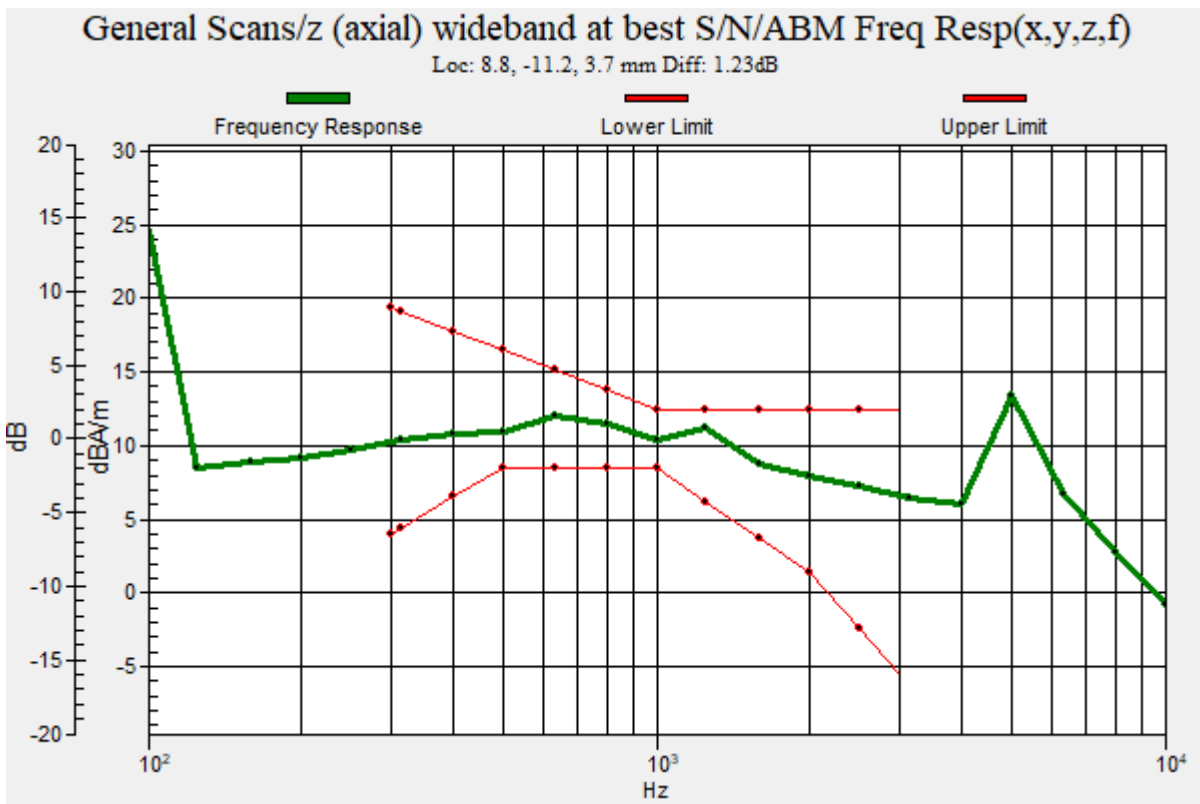

**Plot No.129**

**LTE 30 16QAM 5MHz 1RB 12offset 27710ch Bit rate 75-1 y(transversal)**

Communication System: UID 0, LTE Band30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
 Output Gain: 19.32  
 Measure Window Start: 300ms  
 Measure Window Length: 1000ms  
 BWC applied: 0.15 dB  
 Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 1.85 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -42.17 dBA/m  
 Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM1/ABM2 = 44.02 dB  
 ABM1 comp = 1.85 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 8.3, -8.3, 3.7 mm

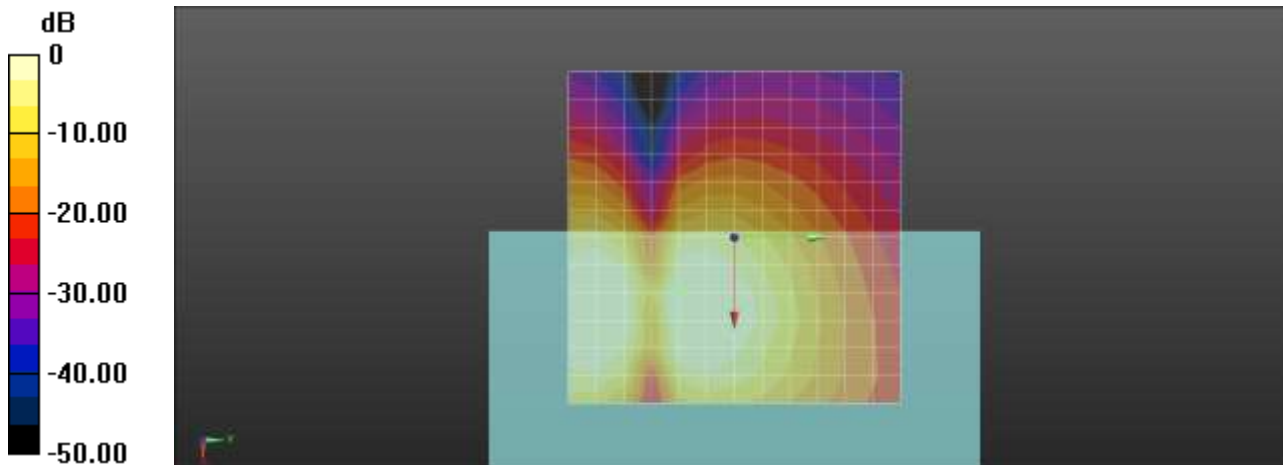

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.130**

**LTE 66 16QAM 5MHz 1RB 12offset 132322ch Bit rate 75 z(axial)**

Communication System: UID 0, LTE Band66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 6.39 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -41.13 dBA/m

Location: 8.3, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 47.52 dB

ABM1 comp = 6.39 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

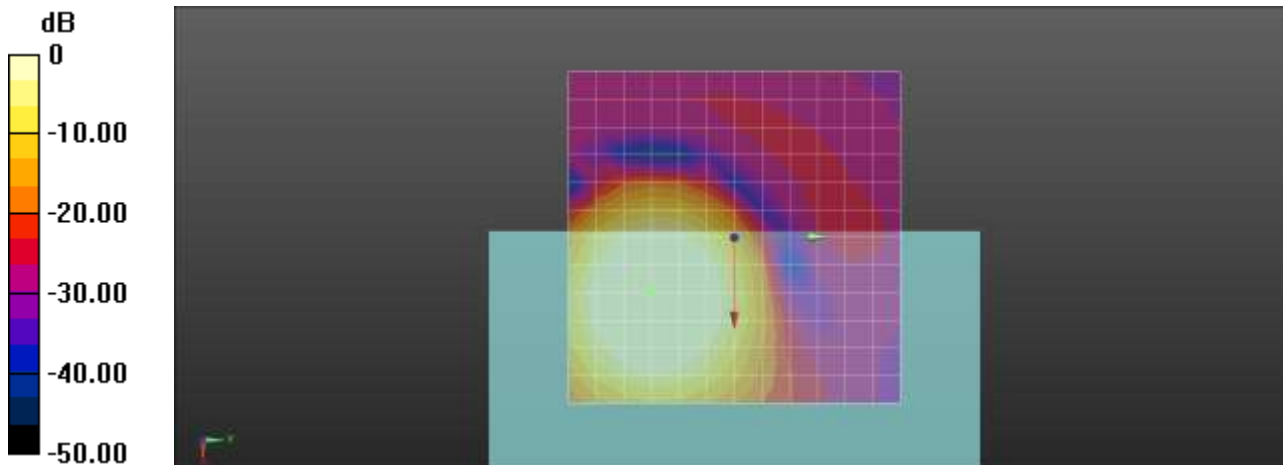

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.131**

**LTE 66 16QAM 5MHz 1RB 12offset 132322ch Bit rate 75 Freq.Response**

Communication System: UID 0, LTE Band66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 58.8  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.24 dB  
 BWC Factor = 9.47 dB  
 Location: 8, -12.3, 3.7 mm

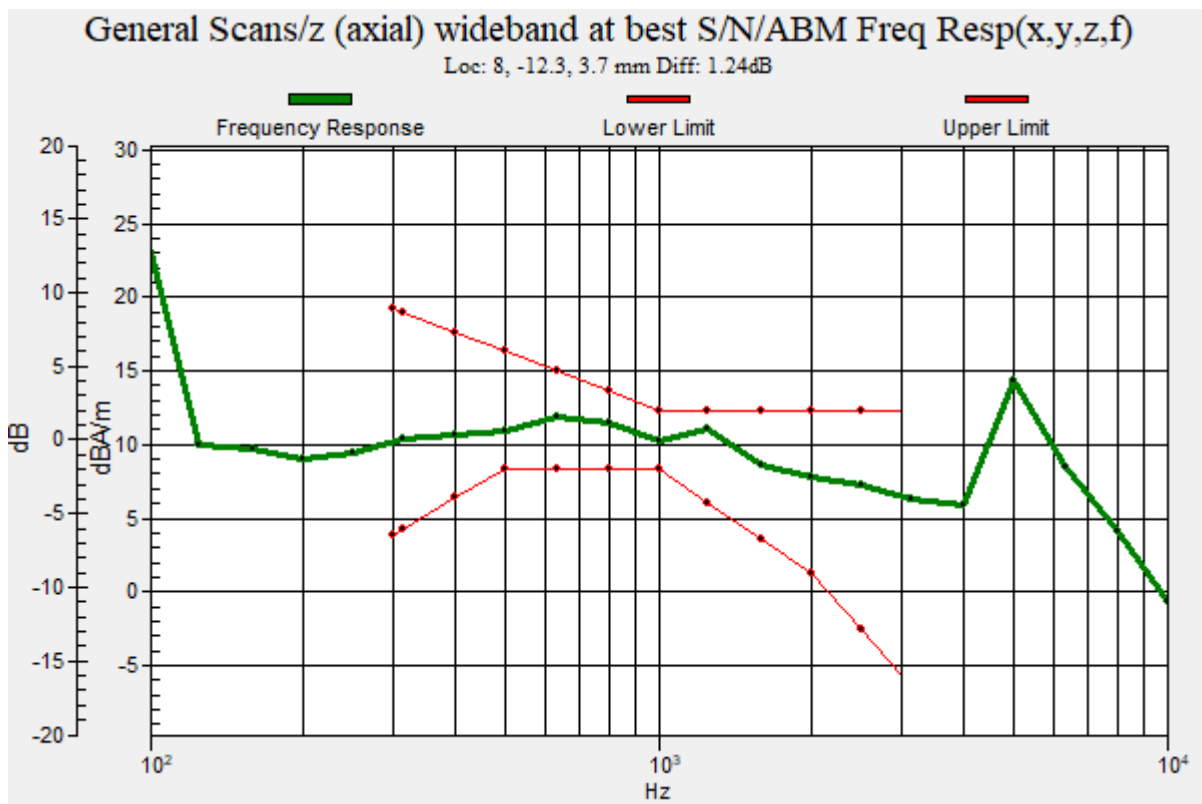

**Plot No.132**

**LTE 66 16QAM 5MHz 1RB 12offset 132322ch Bit rate 75 y(transversal)**

Communication System: UID 0, LTE Band66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 2.42 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -43.11 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 45.53 dB

ABM1 comp = 2.42 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

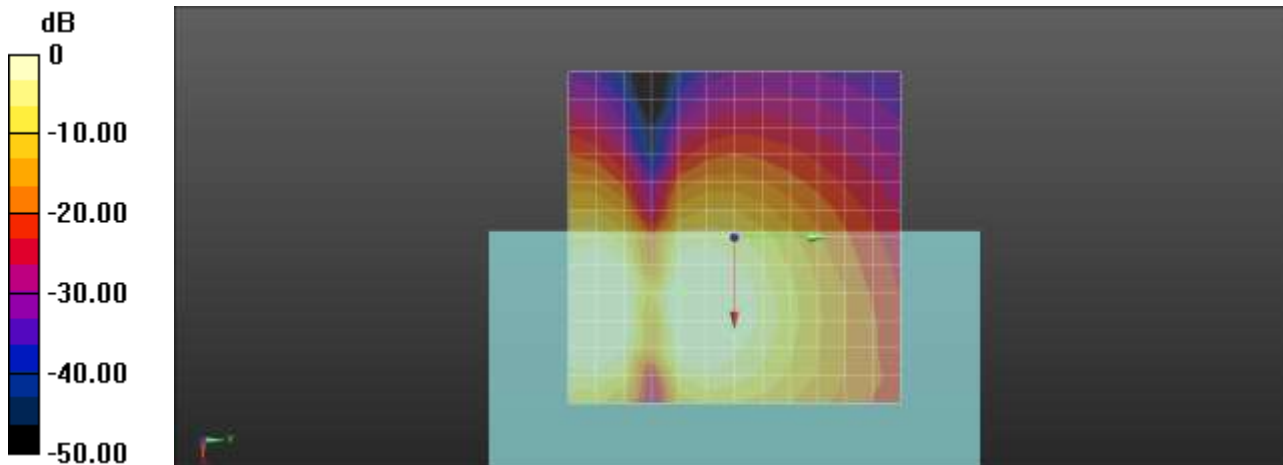

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.133**

**LTE 71 16QAM 5MHz 1RB 12offset 133322ch Bit rate 75 z(axial)**

Communication System: UID 0, LTE Band 71 (0); Frequency: 683 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 6.49 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -40.66 dBA/m

Location: 8.3, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 47.15 dB

ABM1 comp = 6.49 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

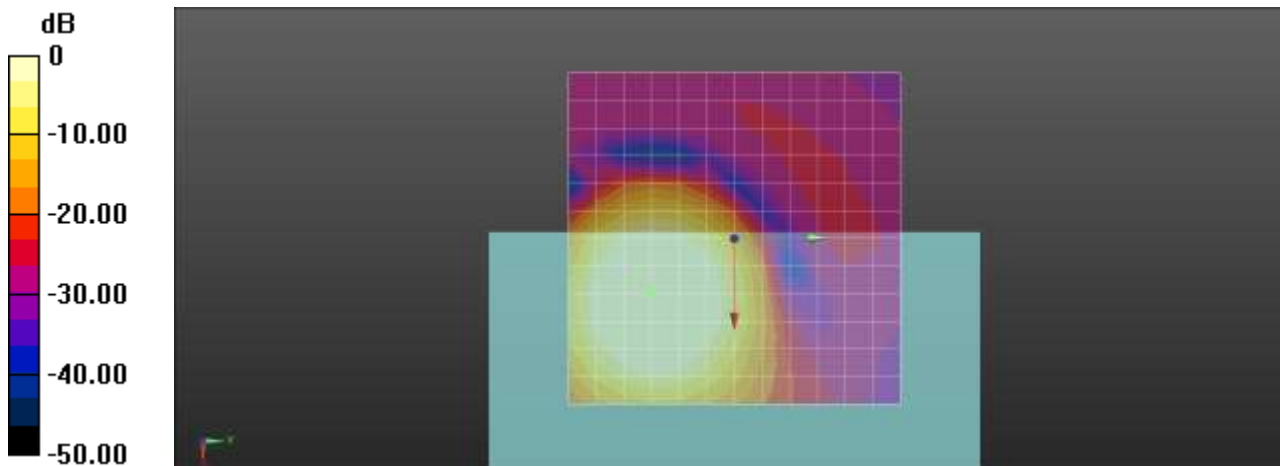

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.134**

**LTE 71 16QAM 5MHz 1RB 12offset 133322ch Bit rate 75 Freq.Response**

Communication System: UID 0, LTE Band 71 (0); Frequency: 683 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 58.8  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.26 dB  
 BWC Factor = 9.47 dB  
 Location: 7.7, -11.8, 3.7 mm

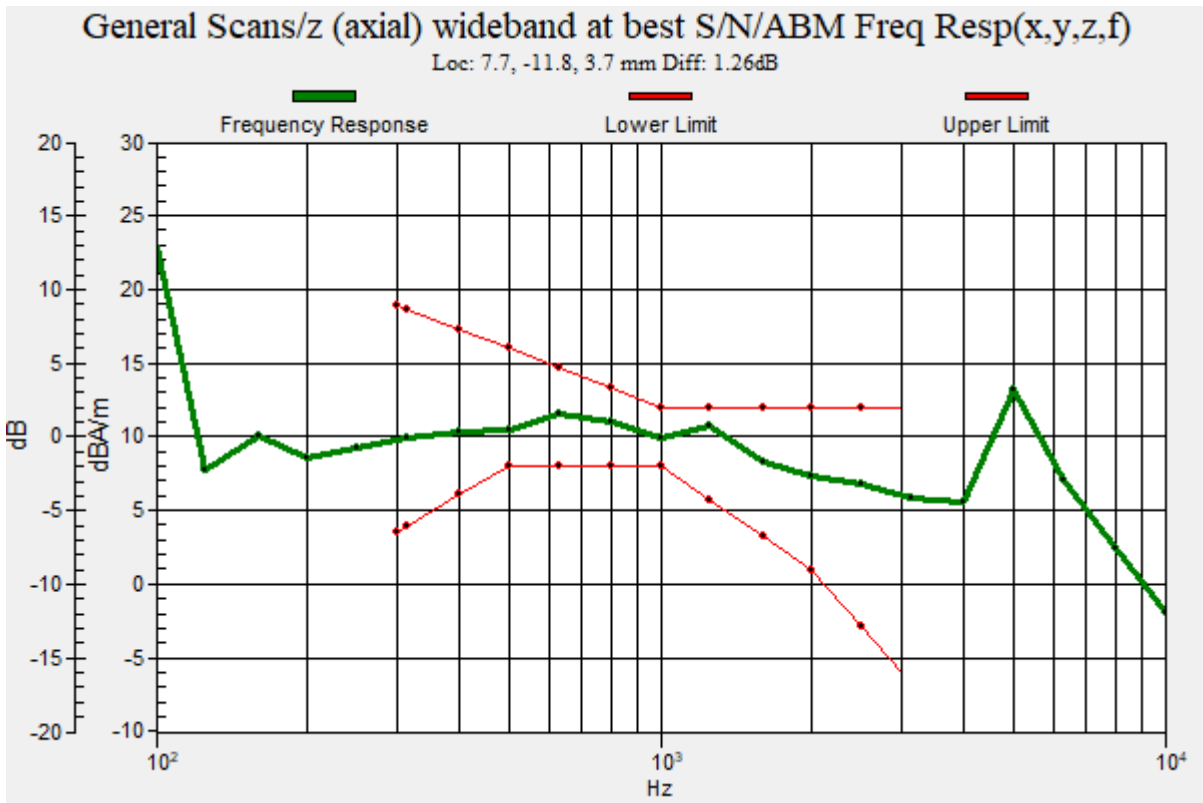

**Plot No.135**

**LTE 71 16QAM 5MHz 1RB 12offset 133322ch Bit rate 75 y(transversal)**

Communication System: UID 0, LTE Band 71 (0); Frequency: 683 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 2.29 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -42.75 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 45.04 dB

ABM1 comp = 2.29 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

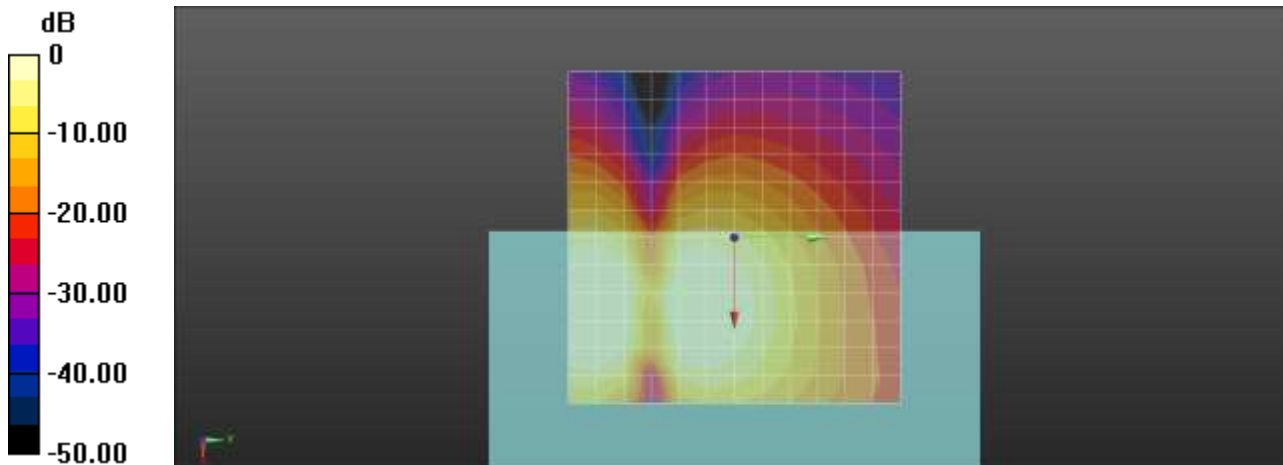

0 dB = 1.000 A/m = 0.00 dBA/m



**Plot No.136**

**LTE 38 QPSK 20MHz 1RB 0offset 38000ch 6 6 Bit rate 75 z(axial)**

Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
 Output Gain: 19.32  
 Measure Window Start: 300ms  
 Measure Window Length: 1000ms  
 BWC applied: 0.15 dB  
 Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 6.44 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -39.25 dBA/m  
 Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM1/ABM2 = 45.69 dB  
 ABM1 comp = 6.44 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 8.3, -12.5, 3.7 mm

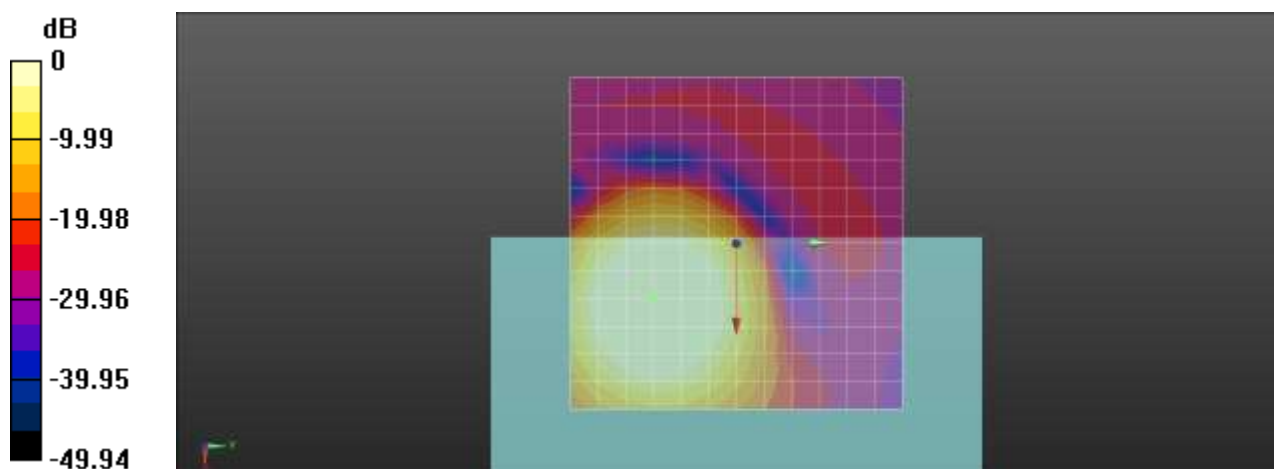

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.137**

**LTE 38 QPSK 20MHz 1RB 0offset 38000ch 6 6 Bit rate 75Freq.Response**

Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav

Output Gain: 58.8

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.24 dB

BWC Factor = 9.47 dB

Location: 8.3, -11.8, 3.7 mm

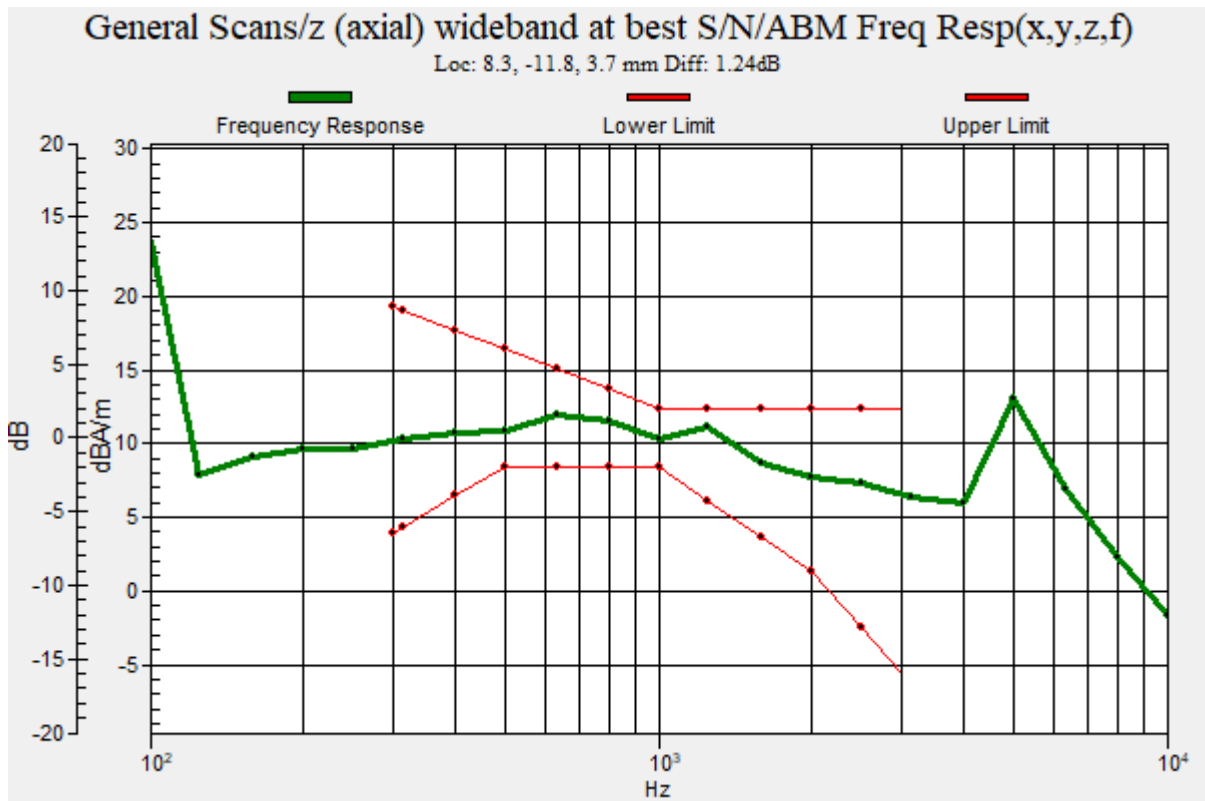

**Plot No.138**

**LTE 38 QPSK 20MHz 1RB 0offset 38000ch 6 6 Bit rate 75 y(transversal)**

Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58016  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 2.77 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -38.80 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 41.57 dB

ABM1 comp = 2.77 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

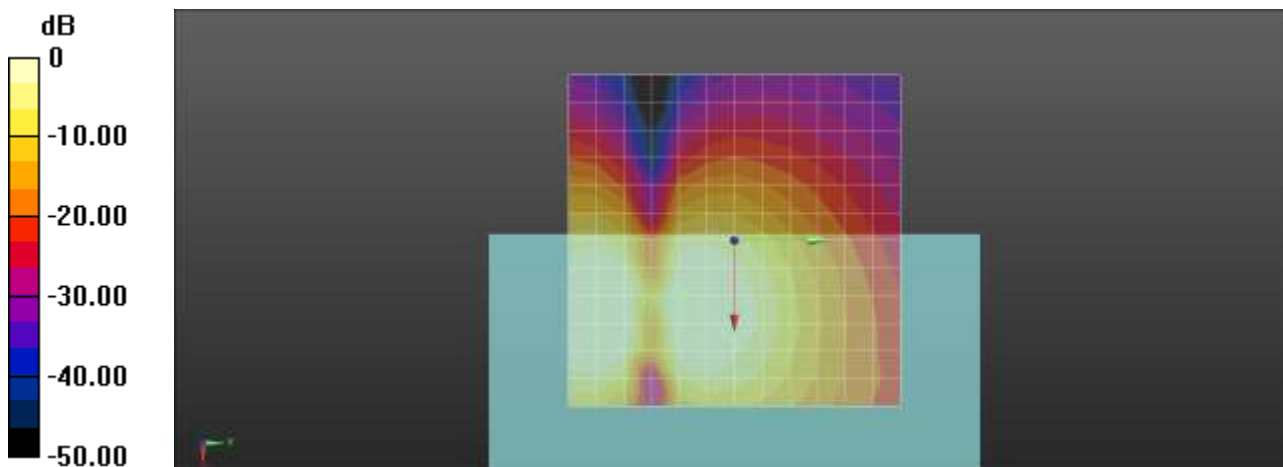

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.139**

**LTE 40 QPSK 10MHz 1RB 0offset 38750ch 6 6 Bit rate 75 Lower Band z(axial)**

Communication System: UID 0, LTE40 (0); Frequency: 2310 MHz;Duty Cycle: 1:1.58016

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 6.57 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -39.15 dBA/m

Location: 8.3, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 45.71 dB

ABM1 comp = 6.57 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

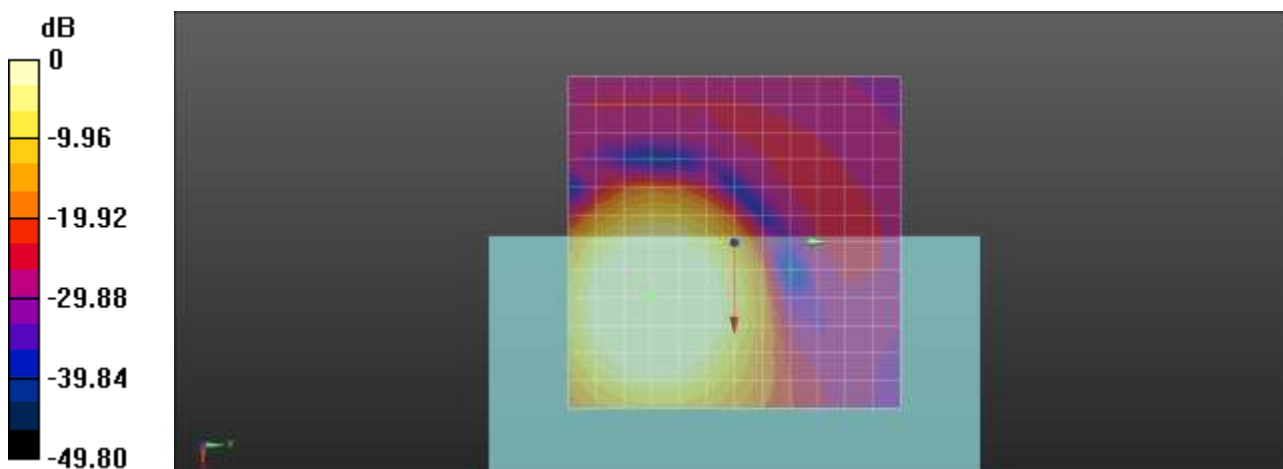

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.140**

**LTE 40 QPSK 10MHz 1RB Offset 38750ch 6 6 Bit rate 75 Lower Band Freq.Response**

Communication System: UID 0, LTE40 (0); Frequency: 2310 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav

Output Gain: 58.8

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.23 dB

BWC Factor = 9.47 dB

Location: 8.3, -11.8, 3.7 mm

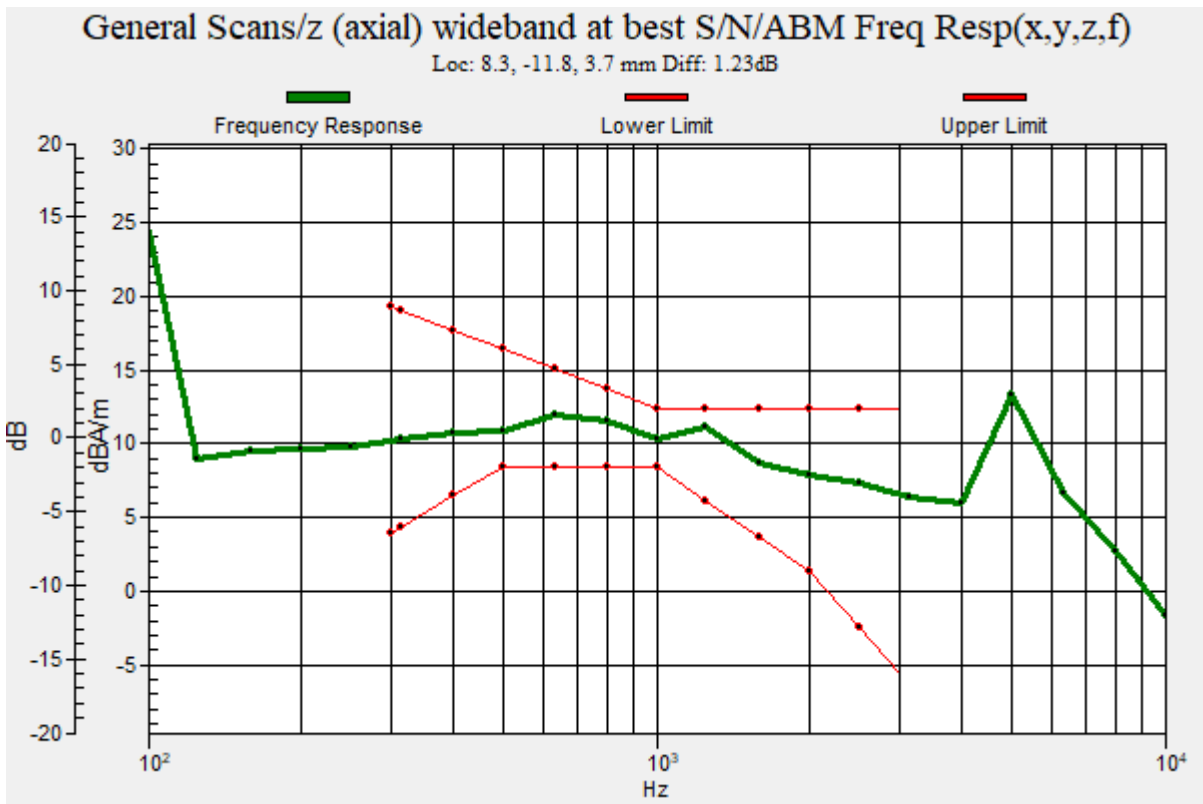

**Plot No.141**

**LTE 40 QPSK 10MHz 1RB 0offset 38750ch 6 6 Bit rate 75 Lower Band y(transversal)**

Communication System: UID 0, LTE40 (0); Frequency: 2310 MHz;Duty Cycle: 1:1.58016

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 2.60 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -39.36 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 41.96 dB

ABM1 comp = 2.60 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

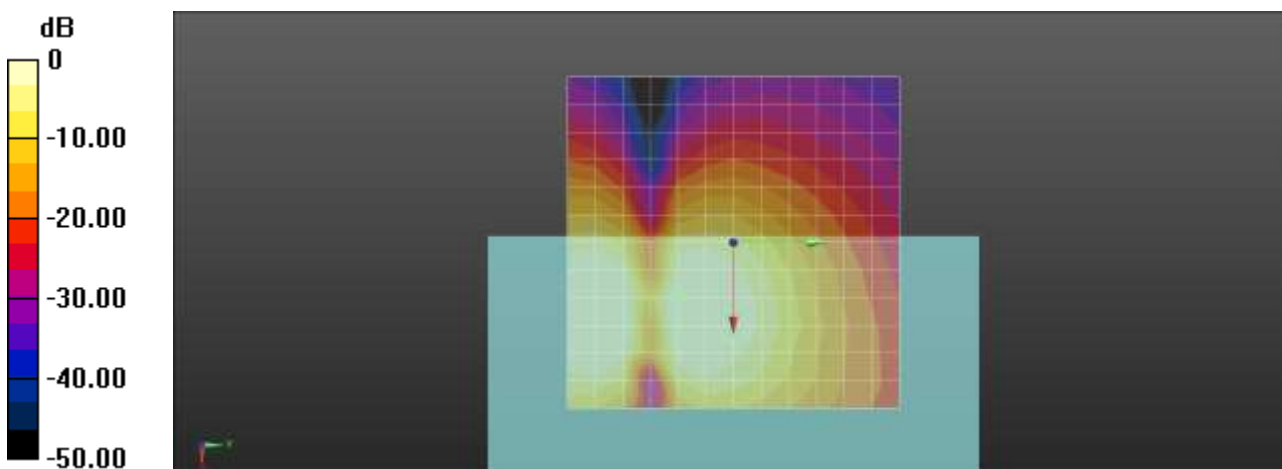

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.142**

**LTE 40 QPSK 10MHz 1RB 0offset 39200ch 6 6 Bit rate 75 Upper Band z(axial)**

Communication System: UID 0, LTE40 (0); Frequency: 2355 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 6.67 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -39.56 dBA/m

Location: 8.3, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 46.23 dB

ABM1 comp = 6.67 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

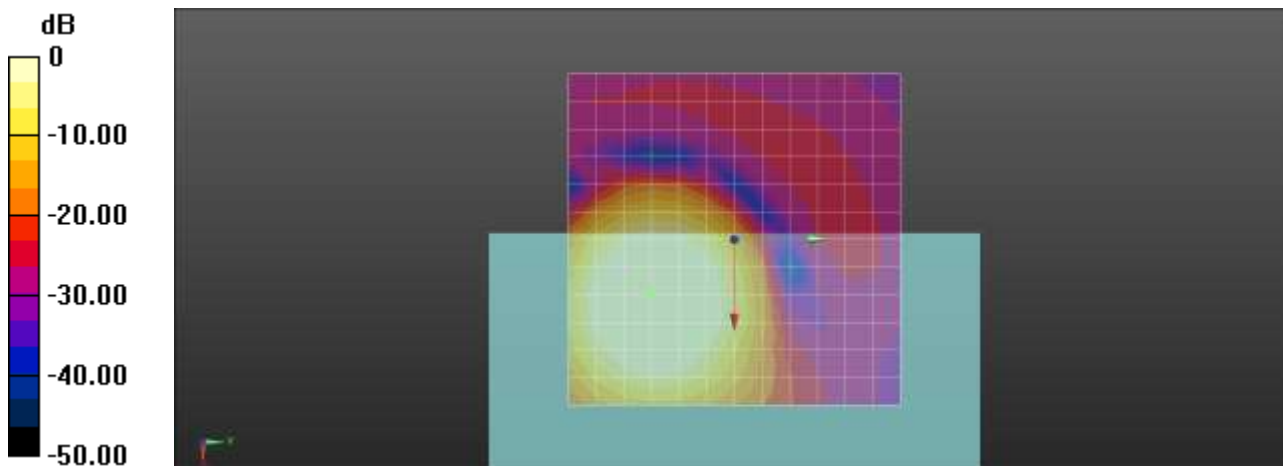

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.143**

**LTE 40 QPSK 10MHz 1RB 0offset 39200ch 6 6 Bit rate 75 Upper Band Freq.Response**

Communication System: UID 0, LTE40 (0); Frequency: 2355 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section


**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 58.8  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.25 dB  
 BWC Factor = 9.47 dB  
 Location: 8.3, -11.9, 3.7 mm

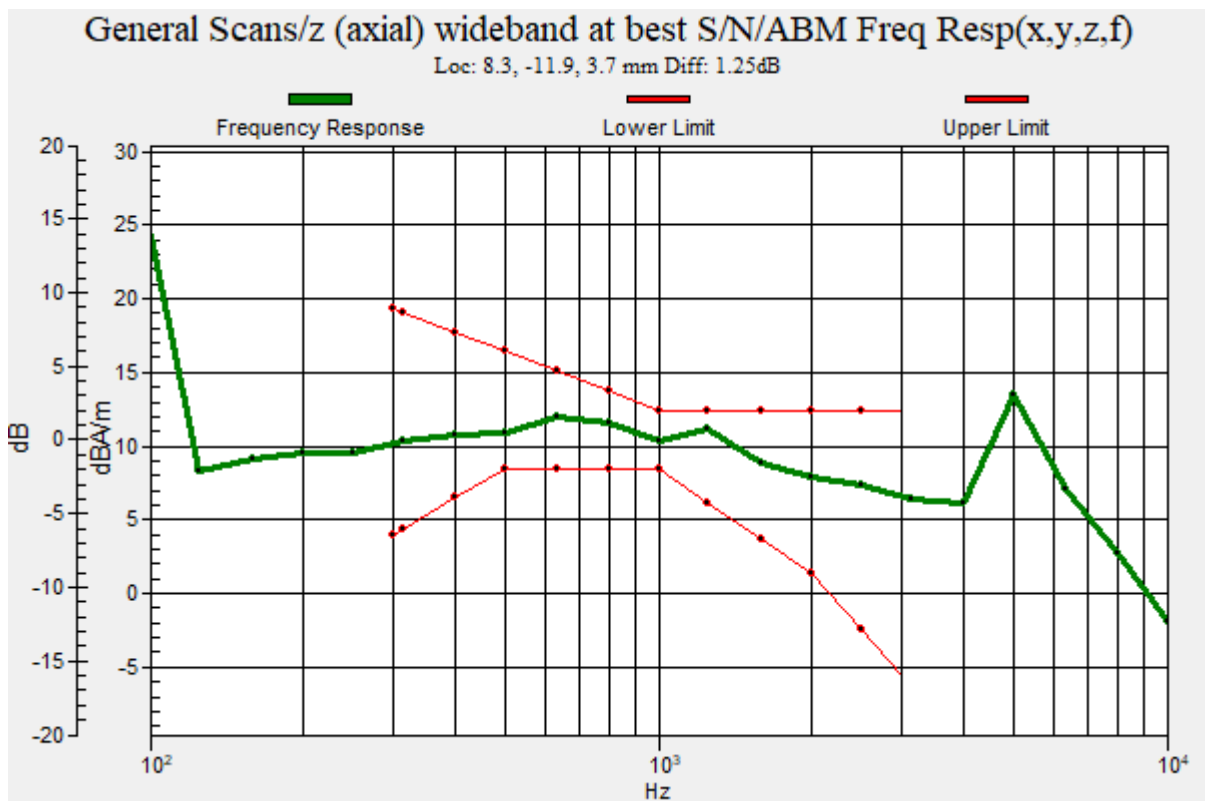



**Plot No.144**

**LTE 40 QPSK 10MHz 1RB 0offset et 39200ch 6 6 Bit rate 75 Upper Band y(transversal)**

Communication System: UID 0, LTE40 (0); Frequency: 2355 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 2.52 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -39.66 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 42.18 dB

ABM1 comp = 2.52 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

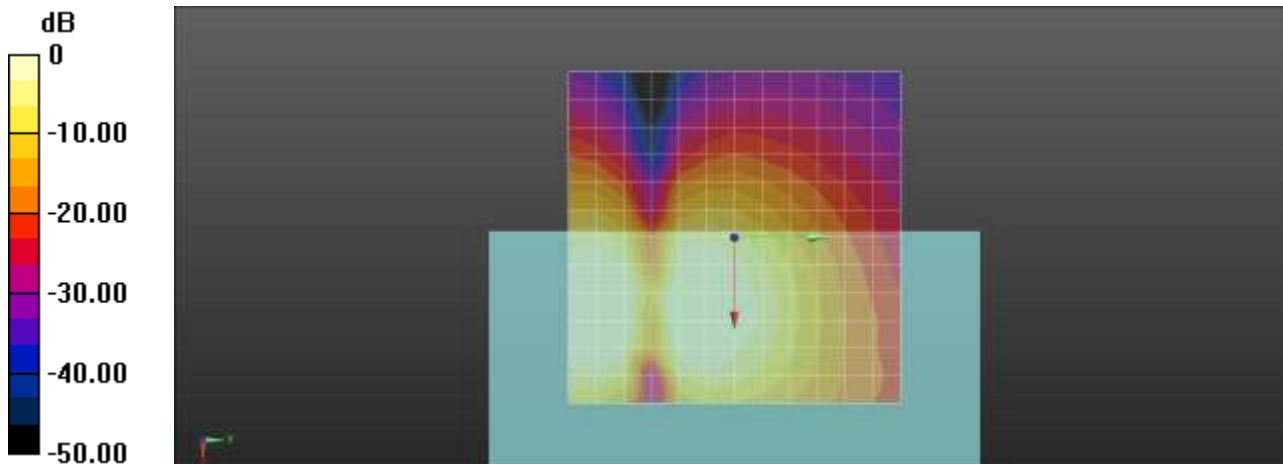

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.145**

**LTE 41 QPSK 20MHz 1RB 0offset 40620ch 6 6 Bit rate 75 z(axial)**

Communication System: UID 0, LTE Band 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58016  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 6.75 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -39.59 dBA/m  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM1/ABM2 = 46.34 dB  
ABM1 comp = 6.75 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

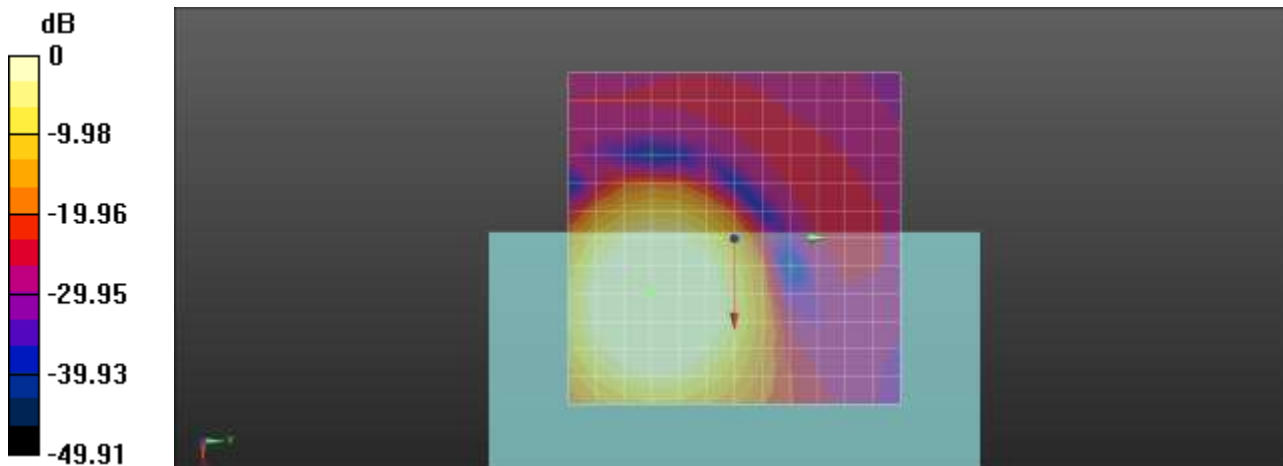

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.146**

**LTE 41 QPSK 20MHz 1RB 0offset 40620ch 6 6 Bit rate 75 Freq.Response**


Communication System: UID 0, LTE Band 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
 Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
 Output Gain: 58.8  
 Measure Window Start: 300ms  
 Measure Window Length: 51000ms  
 BWC applied: 9.47 dB  
 Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.28 dB  
 BWC Factor = 9.47 dB  
 Location: 8.3, -11.8, 3.7 mm

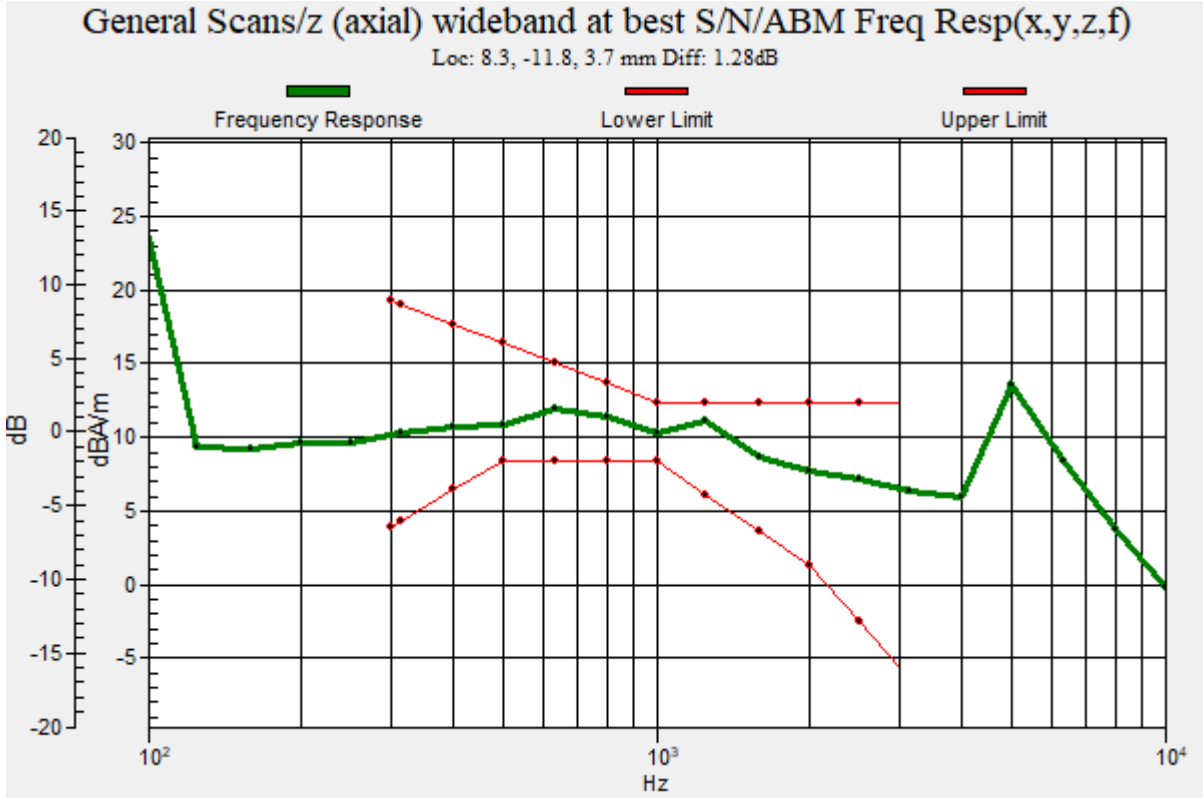

**Plot No.147**

**LTE 41 QPSK 20MHz 1RB 0offset 40620ch 6 6 Bit rate 75 y(transversal)**

Communication System: UID 0, LTE Band 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58016

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 2.82 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -39.77 dBA/m

Location: 8.3, -8.3, 3.7 mm


**Cursor:**

ABM1/ABM2 = 42.59 dB

ABM1 comp = 2.82 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -8.3, 3.7 mm

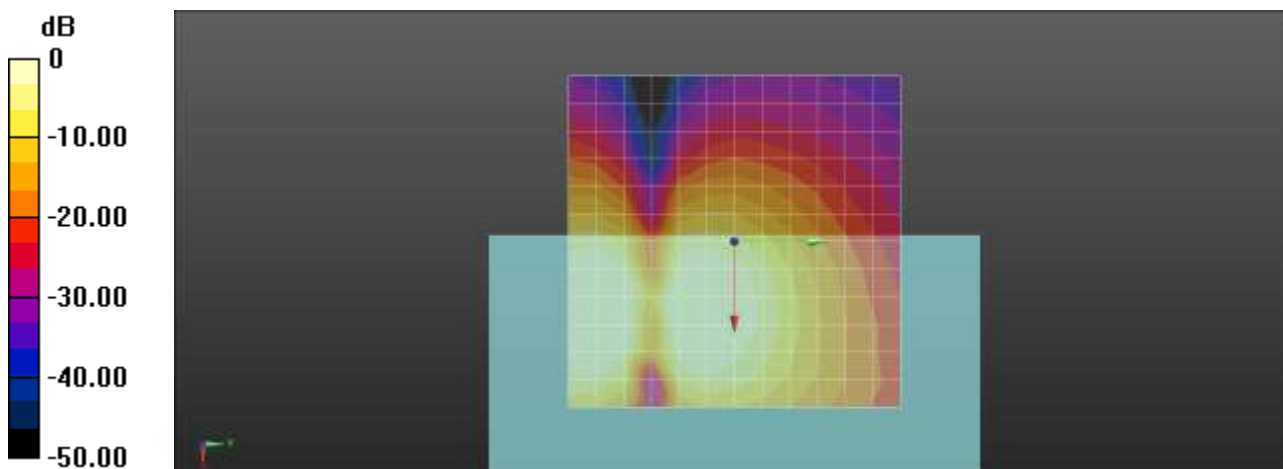

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.148**

**LTE 48 QPSK 20MHz 1RB 0offset 55990ch 6 6 Bit rate 75 z(axial)**

Communication System: UID 0, LTE 48 (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58016

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 8.34 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -16.7, 3.7 mm

**Cursor:**

ABM2 = -36.18 dBA/m

Location: 12.5, -16.7, 3.7 mm


**Cursor:**

ABM1/ABM2 = 44.52 dB

ABM1 comp = 8.34 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -16.7, 3.7 mm

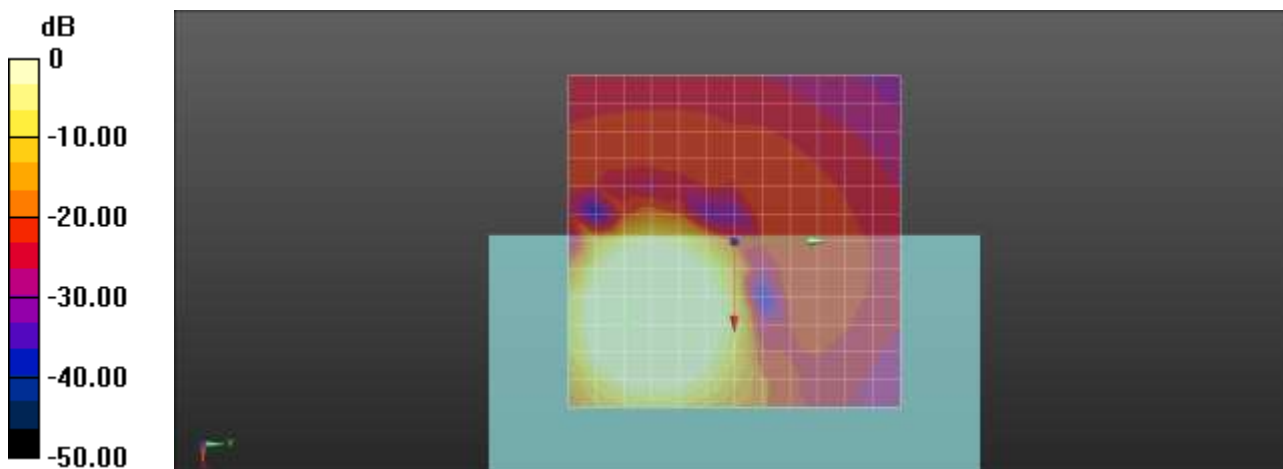

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.149**

**LTE 48 QPSK 20MHz 1RB 0offset 55990ch 6 6 Bit rate 75 Freq.Response\**

Communication System: UID 0, LTE 48 (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58016

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best**

**S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav

Output Gain: 58.8

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**

Diff = 1.29 dB

BWC Factor = 9.47 dB

Location: 12.4, -16.4, 3.7 mm

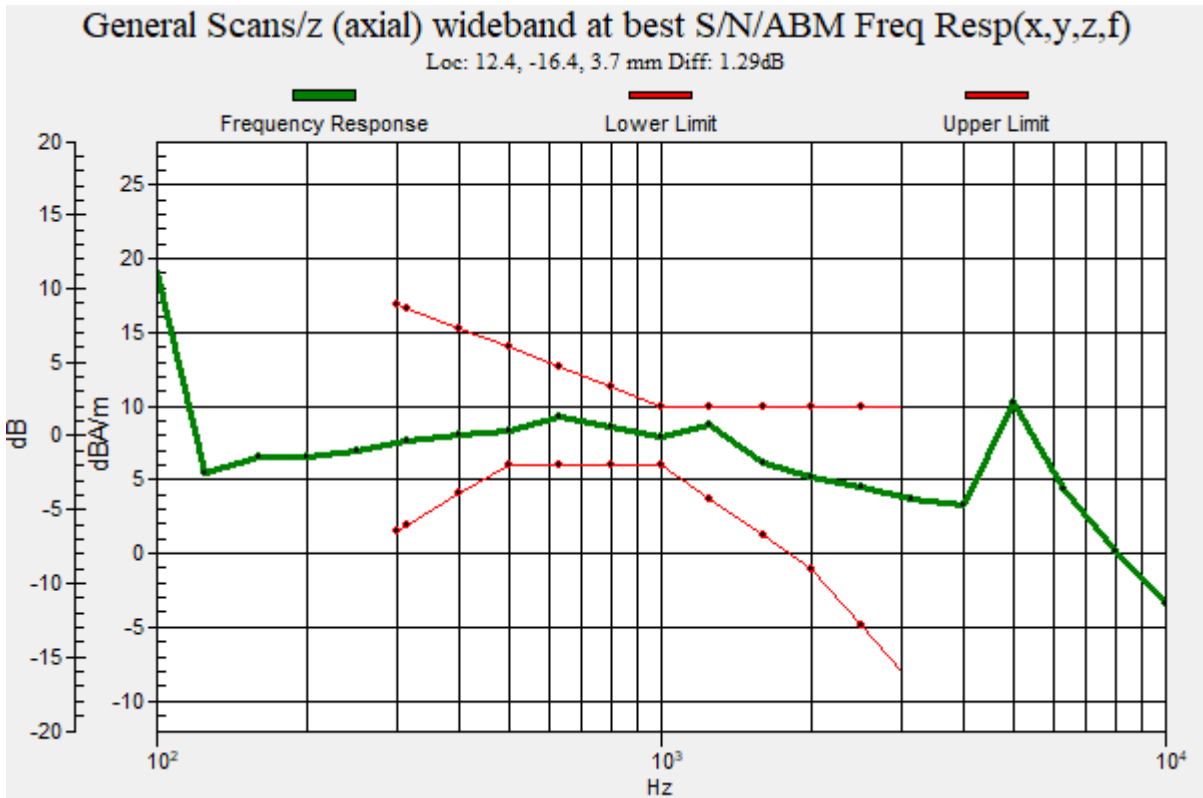

**Plot No.150**

**LTE 48 QPSK 20MHz 1RB 0offset 55990ch 6 6 Bit rate 75 y(transversal)**

Communication System: UID 0, LTE 48 (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58016  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 1.13 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -4.2, 3.7 mm

**Cursor:**

ABM2 = -34.72 dBA/m

Location: 8.3, -4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 35.84 dB

ABM1 comp = 1.13 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -4.2, 3.7 mm

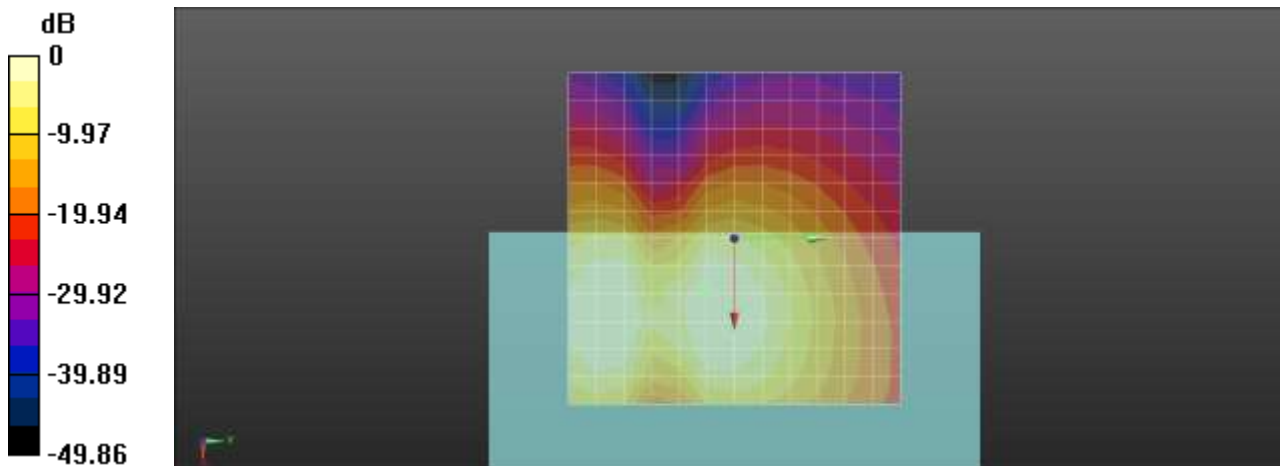

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.151**

**802.11b 5.5.Mpbs 6ch Bit rate 6 z(axial)**

Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
 Output Gain: 19.32  
 Measure Window Start: 300ms  
 Measure Window Length: 1000ms  
 BWC applied: 0.15 dB  
 Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 10.61 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 12.5, -12.5, 3.7 mm

**Cursor:**

ABM2 = -40.29 dBA/m  
 Location: 12.5, -12.5, 3.7 mm

**Cursor:**

ABM1/ABM2 = 50.90 dB  
 ABM1 comp = 10.61 dBA/m  
 BWC Factor = 0.15 dB  
 Location: 12.5, -12.5, 3.7 mm

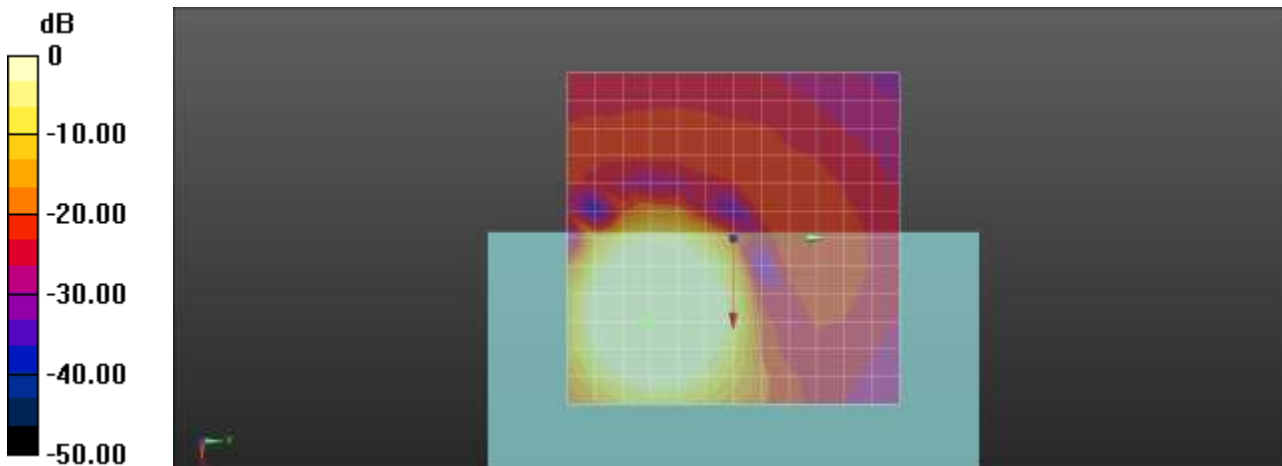

0 dB = 1.000 A/m = 0.00 dBA/m




**Plot No.152**  
**802.11b 5.5.Mpbs 6ch Bit rate 6 Freq.Response**

Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.12 dB  
BWC Factor = 9.47 dB  
Location: 12.2, -12.6, 3.7 mm

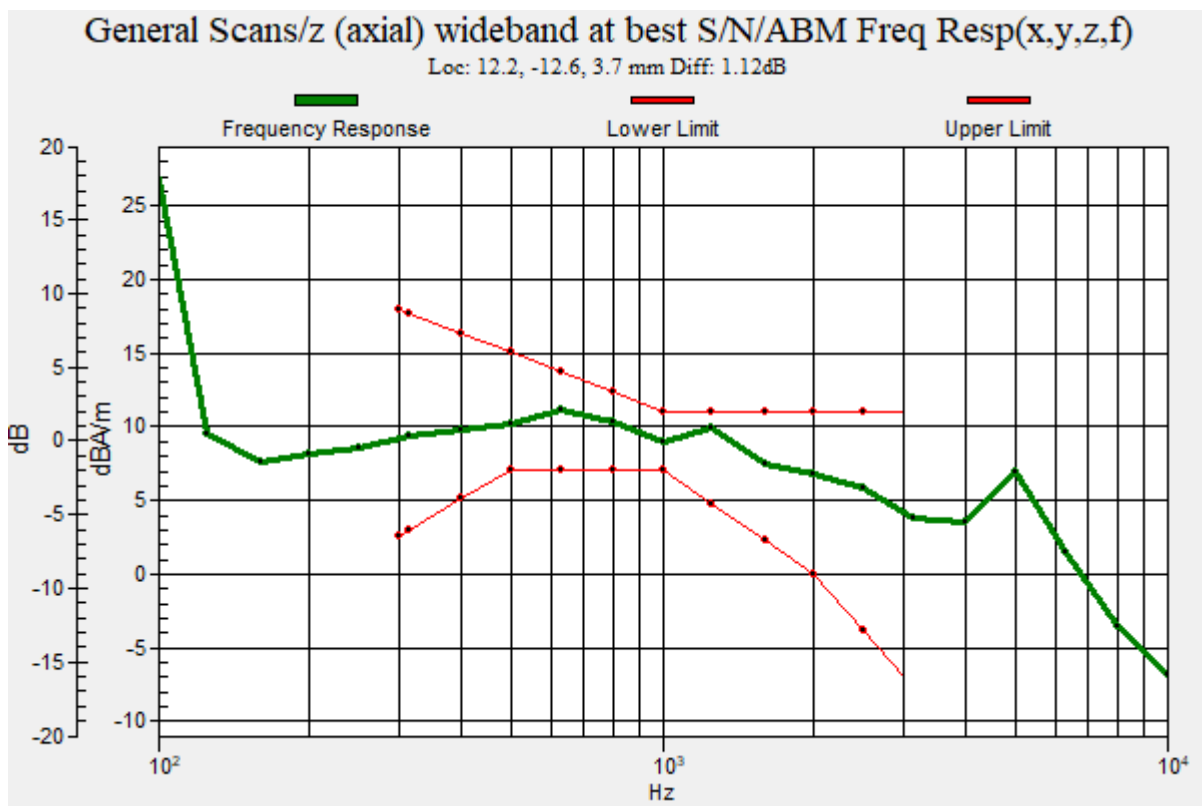

**Plot No.153**

**802.11b 5.5.Mpbs 6ch Bit rate 6 y(trnaversal)**

Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 1.36 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -4.2, 3.7 mm

**Cursor:**

ABM2 = -44.34 dBA/m

Location: 8.3, -4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 45.69 dB

ABM1 comp = 1.36 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -4.2, 3.7 mm

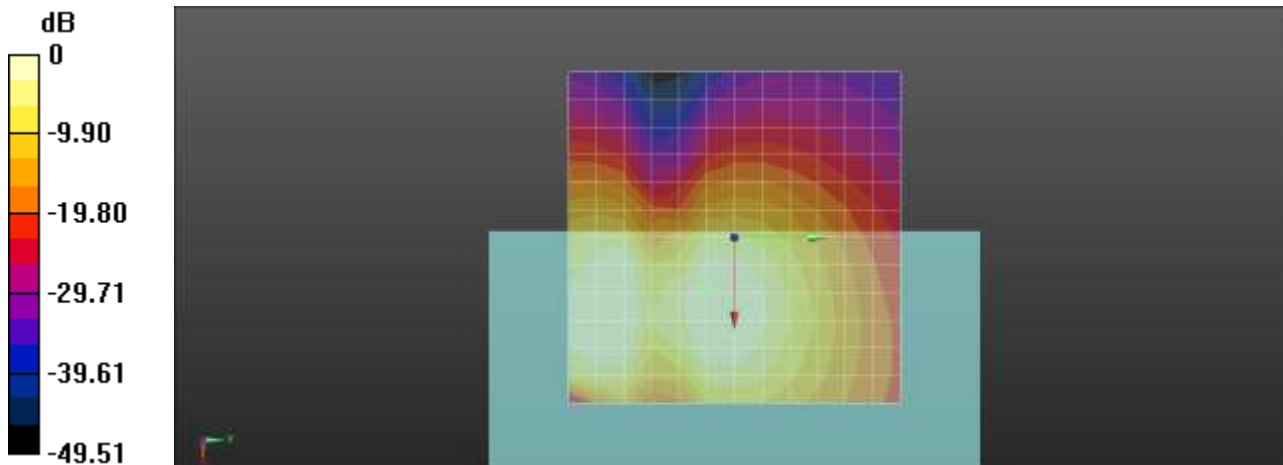

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.154**  
**802.11a 18Mbps 40ch Bit rate 75 z(axial)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:


- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM1 comp = 10.39 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**  
ABM2 = -40.40 dBA/m  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**  
ABM1/ABM2 = 50.80 dB  
ABM1 comp = 10.39 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

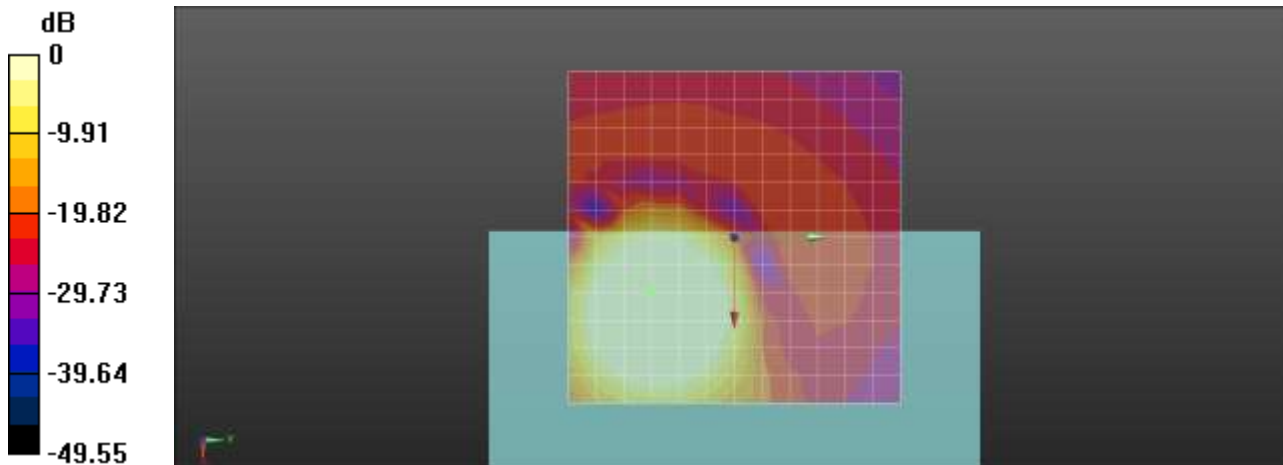

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.155**  
**802.11a 18Mbps 40ch Bit rate 75 Freq.Response**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.26 dB  
BWC Factor = 9.47 dB  
Location: 10.6, -12.1, 3.7 mm

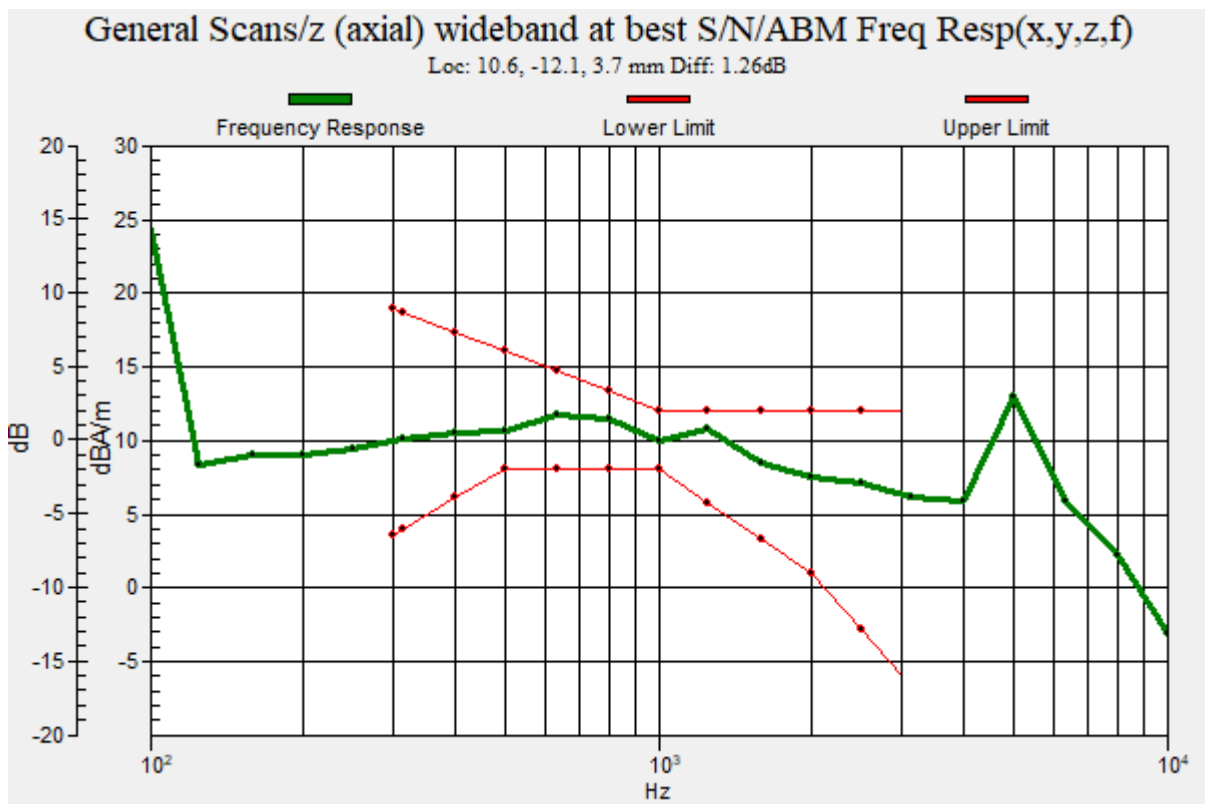

**Plot No.156**  
**802.11a 18Mbps 40ch Bit rate 75 y(transversal)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -1.27 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -4.2, 3.7 mm

**Cursor:**

ABM2 = -48.74 dBA/m  
Location: 4.2, -4.2, 3.7 mm

**Cursor:**

ABM1/ABM2 = 47.47 dB  
ABM1 comp = -1.27 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -4.2, 3.7 mm

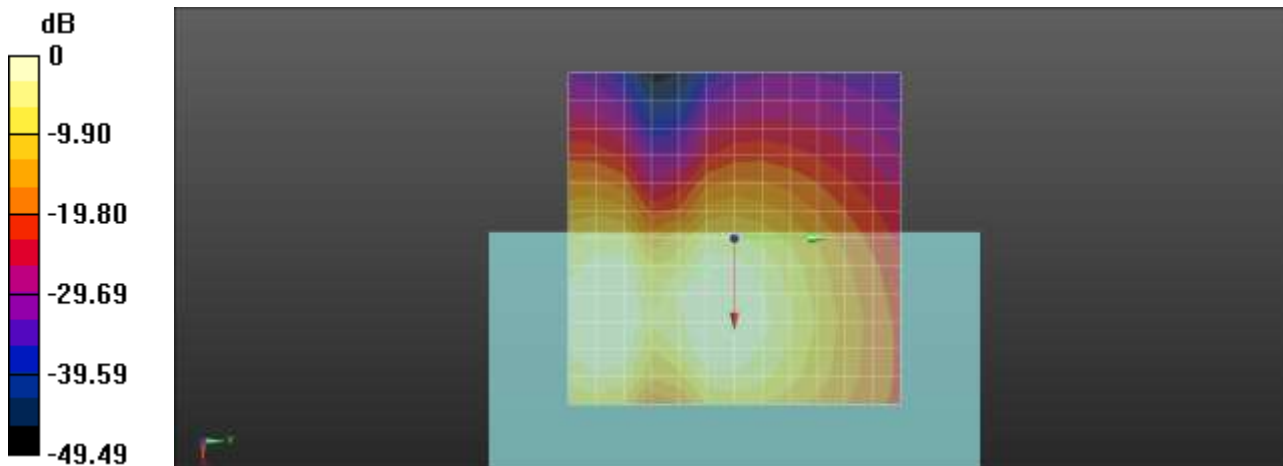

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.157**

**802.11a 18Mbps 60ch Bit rate 75 z(axial)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5300 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 11.97 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, -12.5, 3.7 mm

**Cursor:**

ABM2 = -39.07 dBA/m

Location: 12.5, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 51.04 dB

ABM1 comp = 11.97 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, -12.5, 3.7 mm

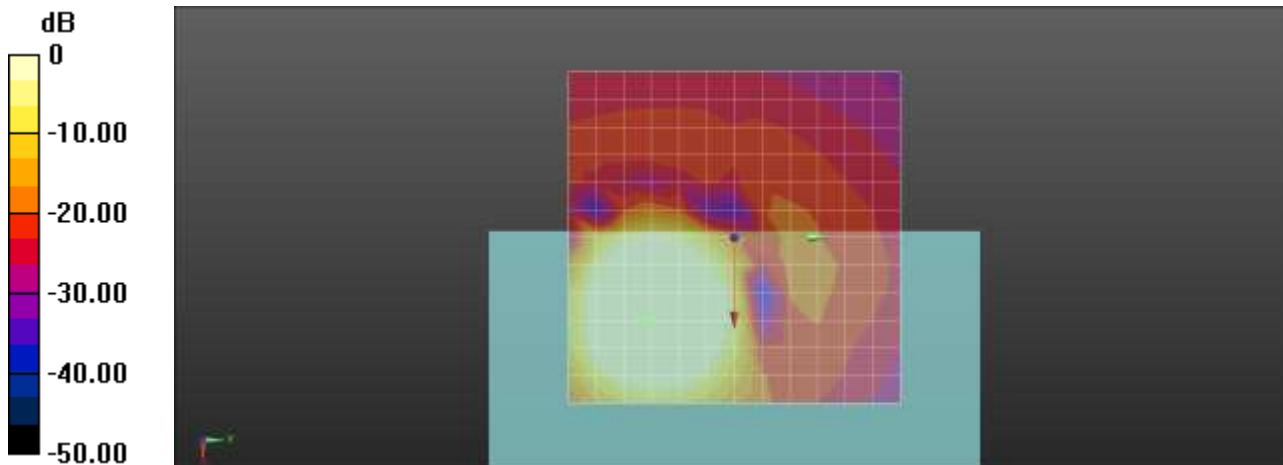

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.158**  
**802.11a 18Mbps 60ch Bit rate 75 Freq.Response**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5300 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.49 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.35 dB  
BWC Factor = 9.49 dB  
Location: 10.8, -12.2, 3.7 mm

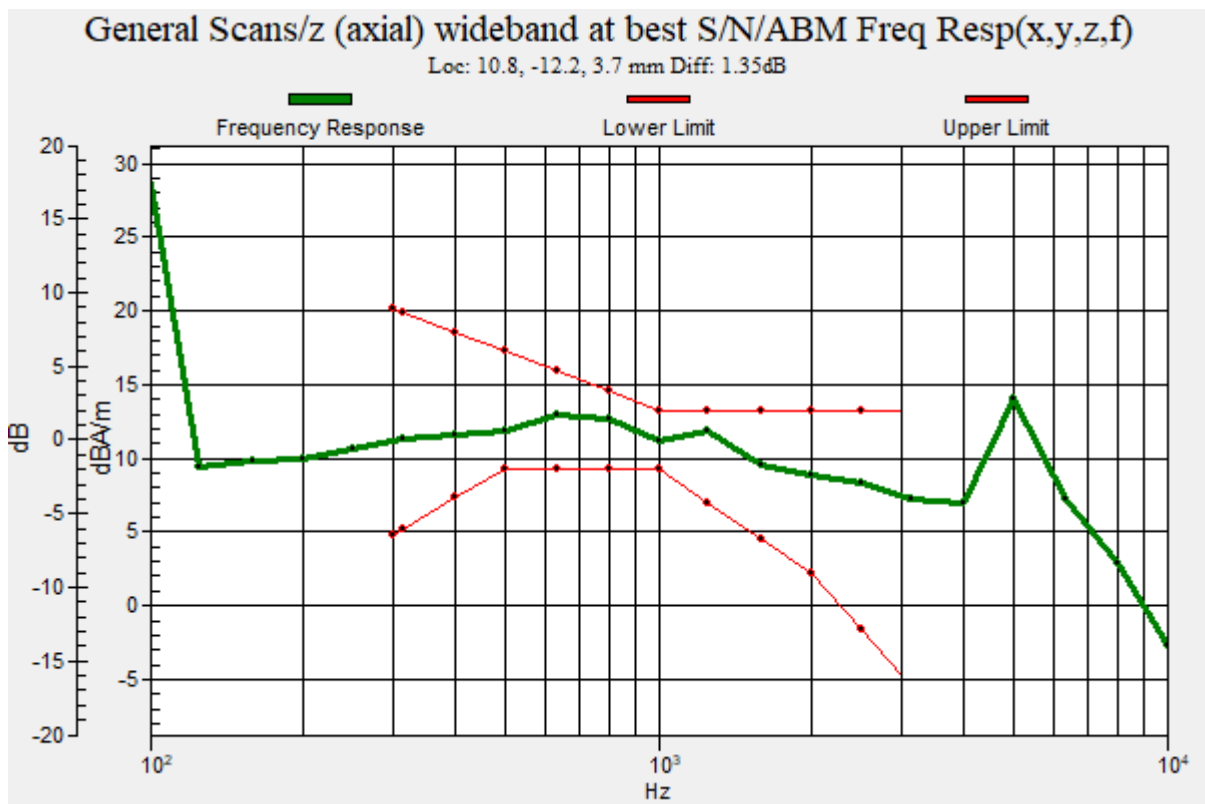

**Plot No.159**  
**802.11a 18Mbps 60ch Bit rate 75 y(transversal)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5300 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.17 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -2.04 dBA/m  
BWC Factor = 0.17 dB  
Location: 4.2, 0, 3.7 mm

**Cursor:**

ABM2 = -48.80 dBA/m  
Location: 4.2, 0, 3.7 mm

**Cursor:**

ABM1/ABM2 = 46.76 dB  
ABM1 comp = -2.04 dBA/m  
BWC Factor = 0.17 dB  
Location: 4.2, 0, 3.7 mm

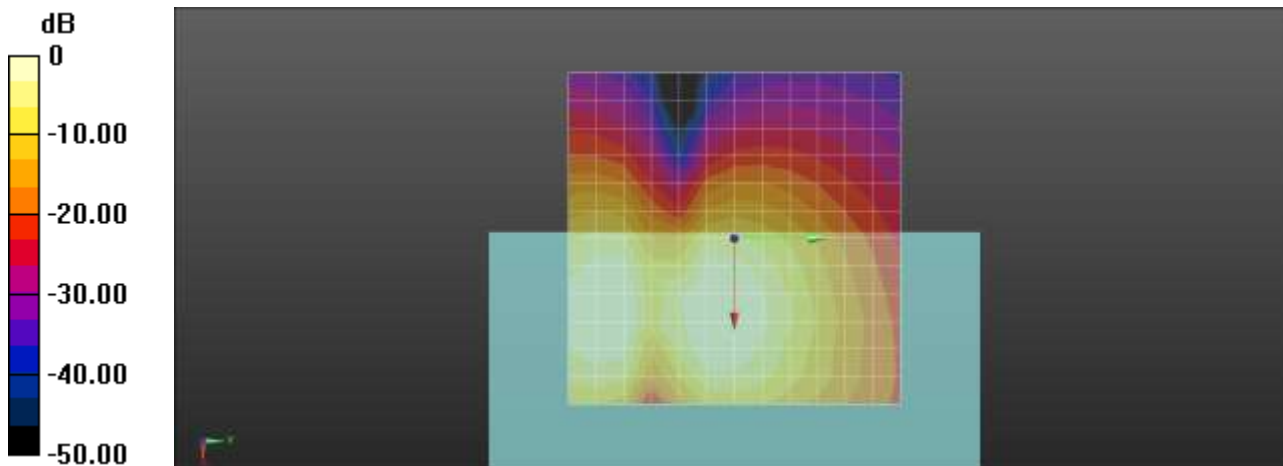

0 dB = 1.000 A/m = 0.00 dBA/m



**Plot No.160**

**802.11a 18Mbps 120ch Bit rate 75 z(axial)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5600 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 3000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 7.80 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -16.7, 3.7 mm

**Cursor:**

ABM2 = -41.20 dBA/m

Location: 12.5, -16.7, 3.7 mm


**Cursor:**

ABM1/ABM2 = 49.00 dB

ABM1 comp = 7.80 dBA/m

BWC Factor = 0.15 dB

Location: 12.5, -16.7, 3.7 mm

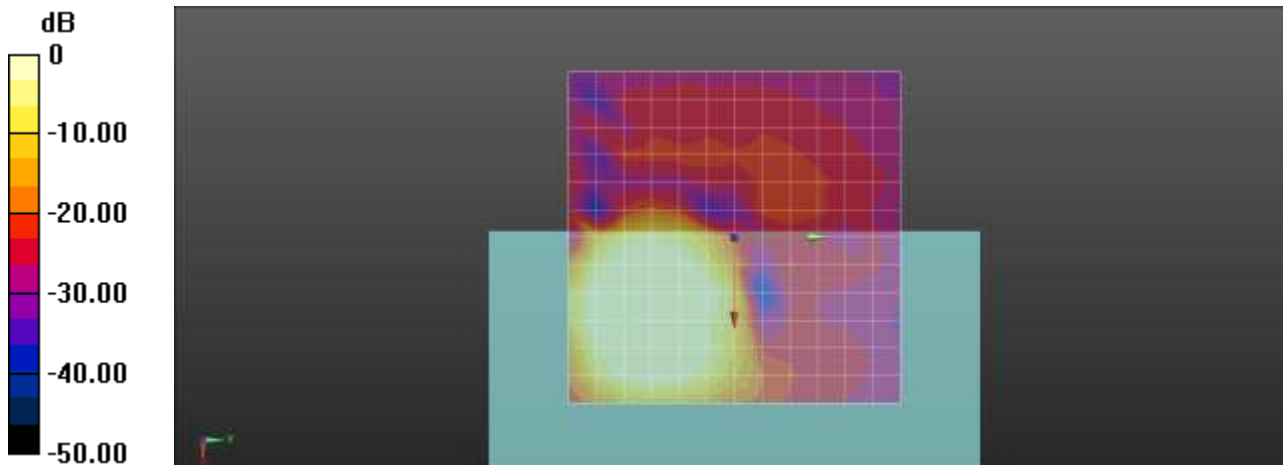

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.161**  
**802.11a 18Mbps 120ch Bit rate 75 Freq.Response**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5600 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.22 dB  
BWC Factor = 9.47 dB  
Location: 11.2, -16.2, 3.7 mm

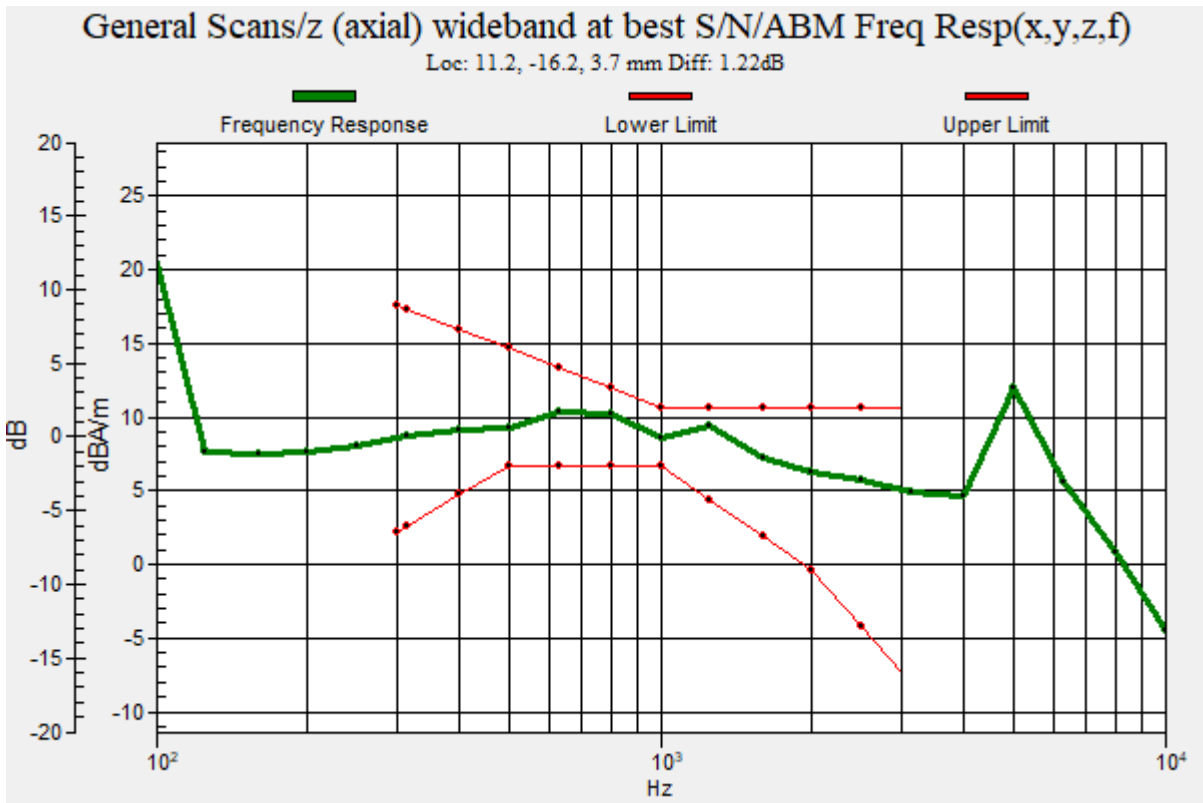

**Plot No.162**

**802.11a 18Mbps 120ch Bit rate 75 y(transversal)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5600 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 3000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 0.39 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -4.2, 3.7 mm

**Cursor:**

ABM2 = -46.02 dBA/m

Location: 8.3, -4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 46.42 dB

ABM1 comp = 0.39 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -4.2, 3.7 mm

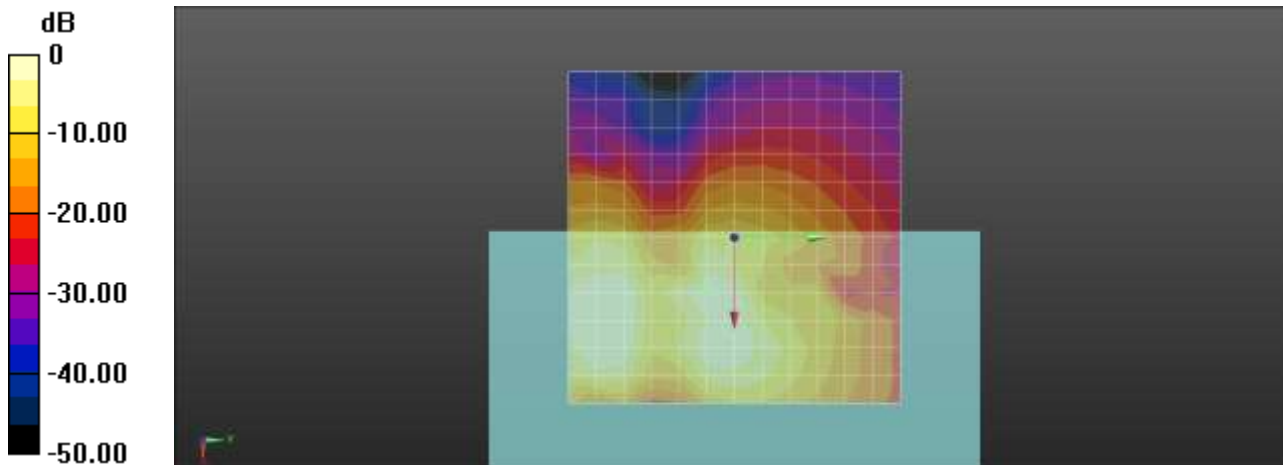

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.163**

**802.11a 18Mbps 157ch Bit rate 75 z(axial)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 10.86 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -39.52 dBA/m

Location: 8.3, -12.5, 3.7 mm


**Cursor:**

ABM1/ABM2 = 50.38 dB

ABM1 comp = 10.86 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -12.5, 3.7 mm

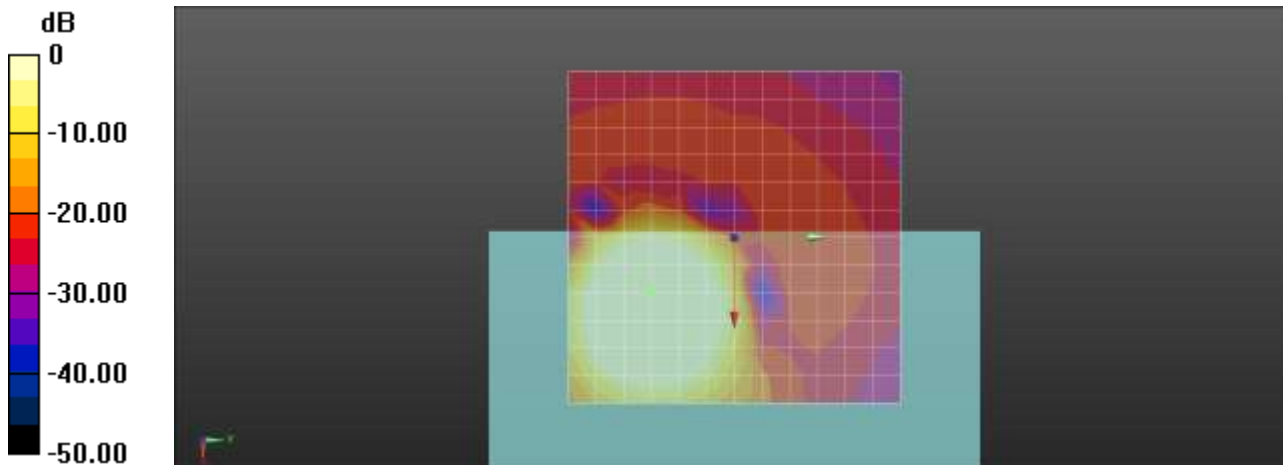

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.164**  
**802.11a 18Mbps 157ch Bit rate 75 Freq.Response**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.25 dB  
BWC Factor = 9.47 dB  
Location: 10.6, -13.6, 3.7 mm

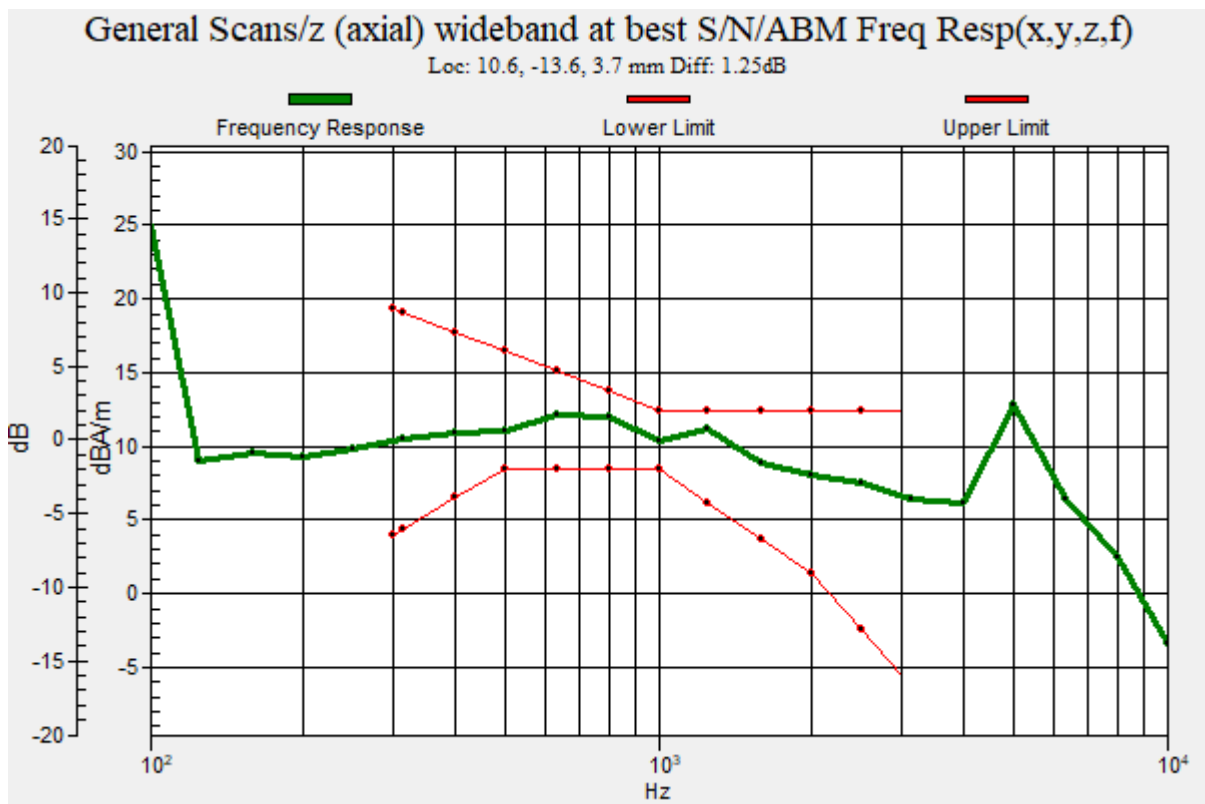

**Plot No.165**

**802.11a 18Mbps 157ch Bit rate 75 y(transversal)**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM1 comp = 1.17 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -4.2, 3.7 mm

**Cursor:**

ABM2 = -46.71 dBA/m

Location: 8.3, -4.2, 3.7 mm


**Cursor:**

ABM1/ABM2 = 47.89 dB

ABM1 comp = 1.17 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, -4.2, 3.7 mm

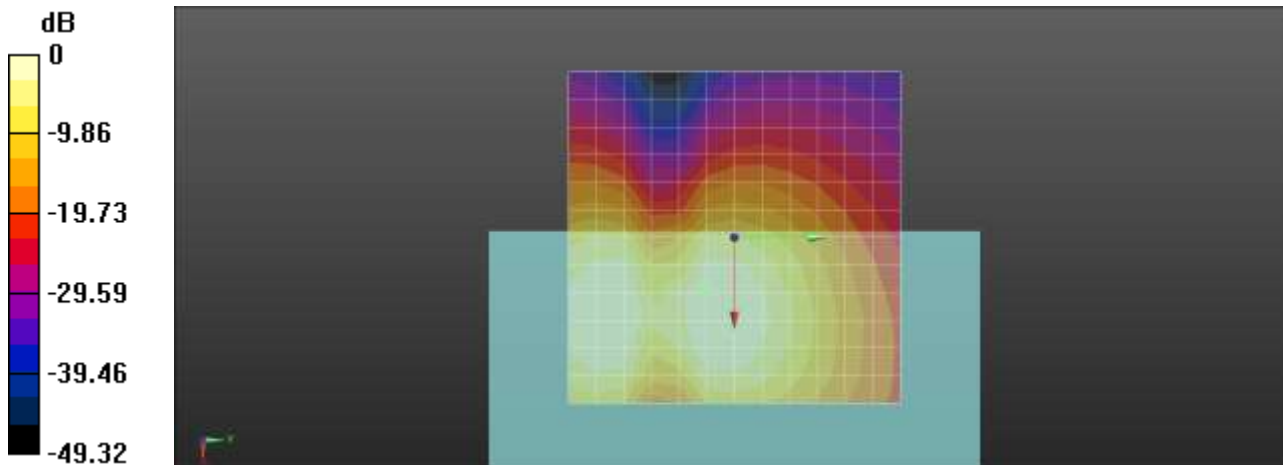

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.166**  
**EVDO BC0 Rev.A 384ch Bit rate 75 z(axial)**

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 8.54 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM2 = -42.01 dBA/m  
Location: 8.3, -8.3, 3.7 mm

**Cursor:**

ABM1/ABM2 = 50.55 dB  
ABM1 comp = 8.54 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -8.3, 3.7 mm

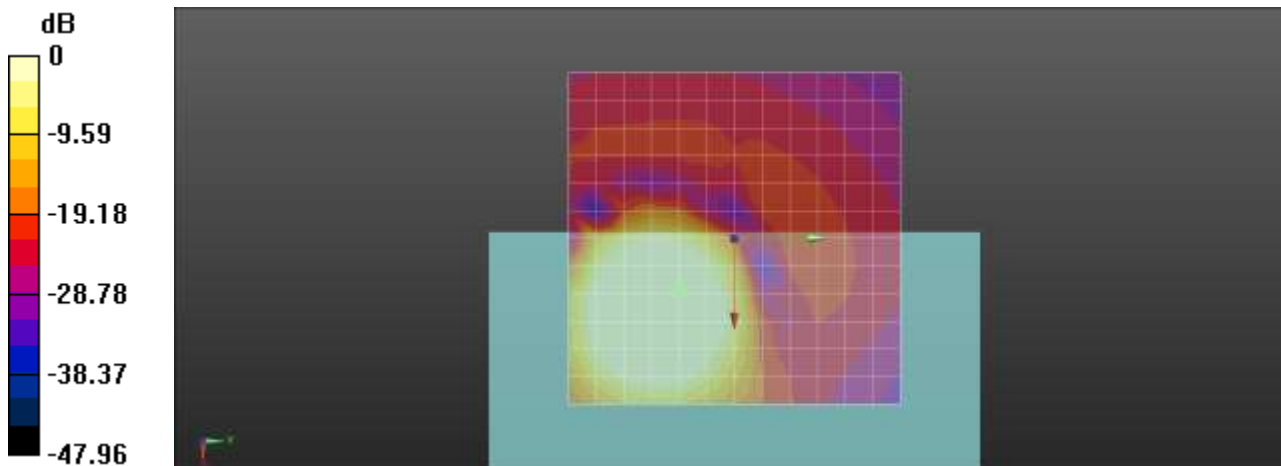

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.167**  
**EVDO BC0 Rev.A 384ch Bit rate 75 Freq.Response**

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.32 dB  
BWC Factor = 9.47 dB  
Location: 9.5, -15.7, 3.7 mm

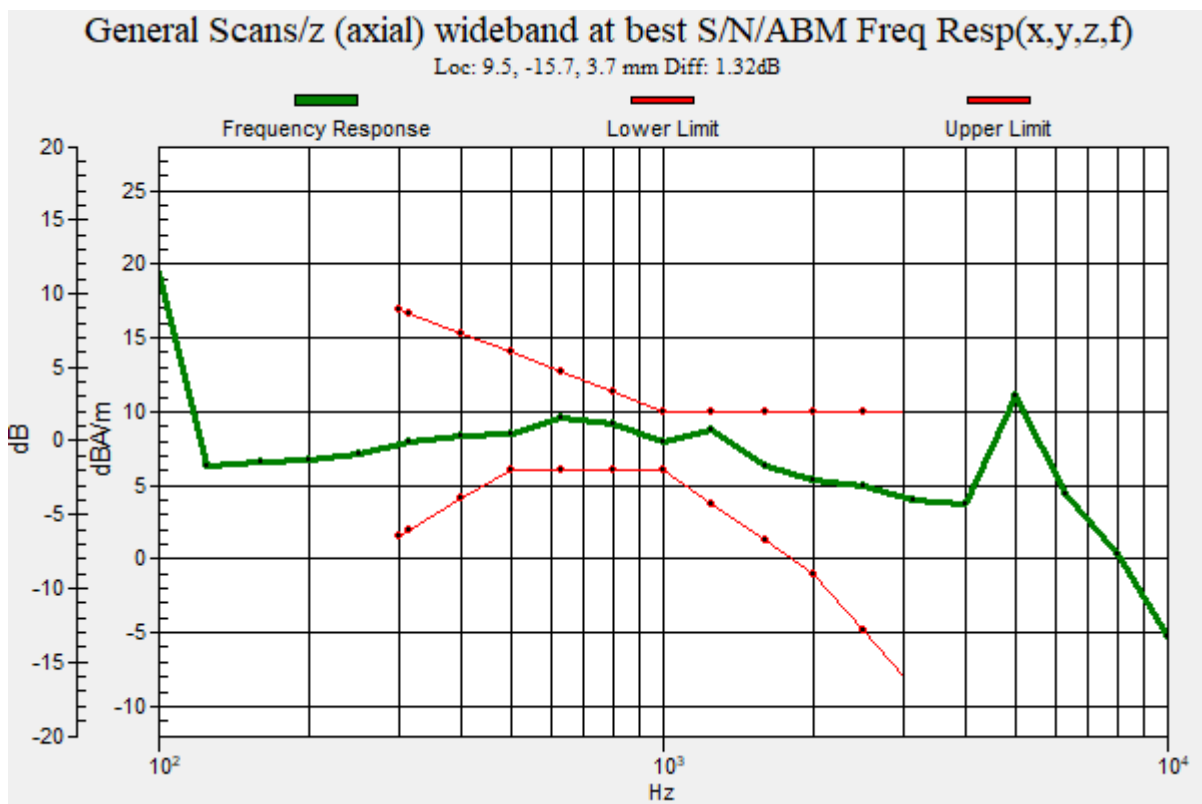



**Plot No.168**  
**EVDO BC0 Rev.A 384ch Bit rate 75 y(transversal)**

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -1.65 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -20.8, 3.7 mm

**Cursor:**

ABM2 = -49.43 dBA/m  
Location: 4.2, -20.8, 3.7 mm

**Cursor:**

ABM1/ABM2 = 47.78 dB  
ABM1 comp = -1.65 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -20.8, 3.7 mm

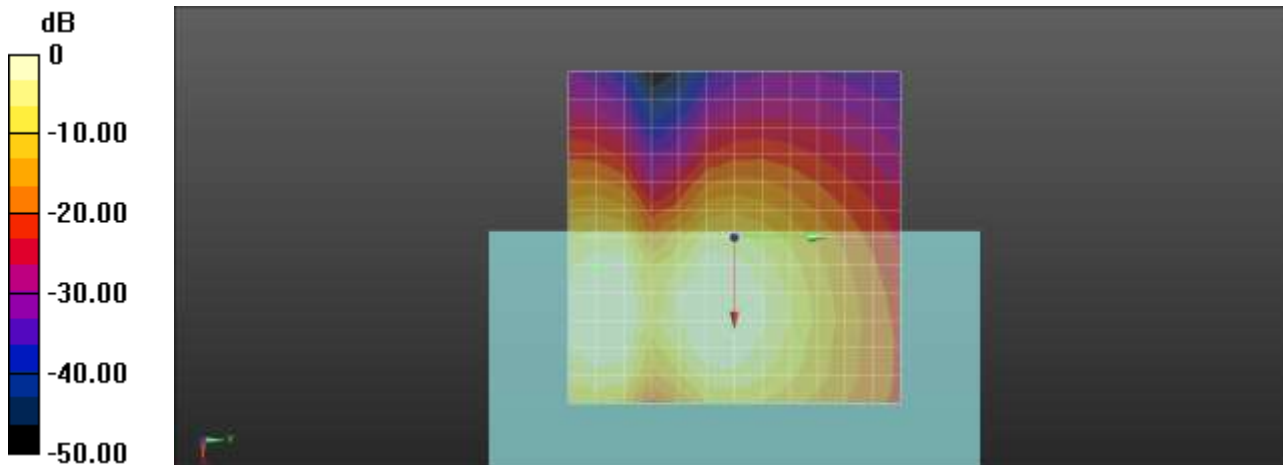

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.169**  
**EVDO BC1 Rev.A 600ch Bit rate 75 z(axial)**

Communication System: UID 0, CDMA BC1 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 10.07 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -40.35 dBA/m  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM1/ABM2 = 50.43 dB  
ABM1 comp = 10.07 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

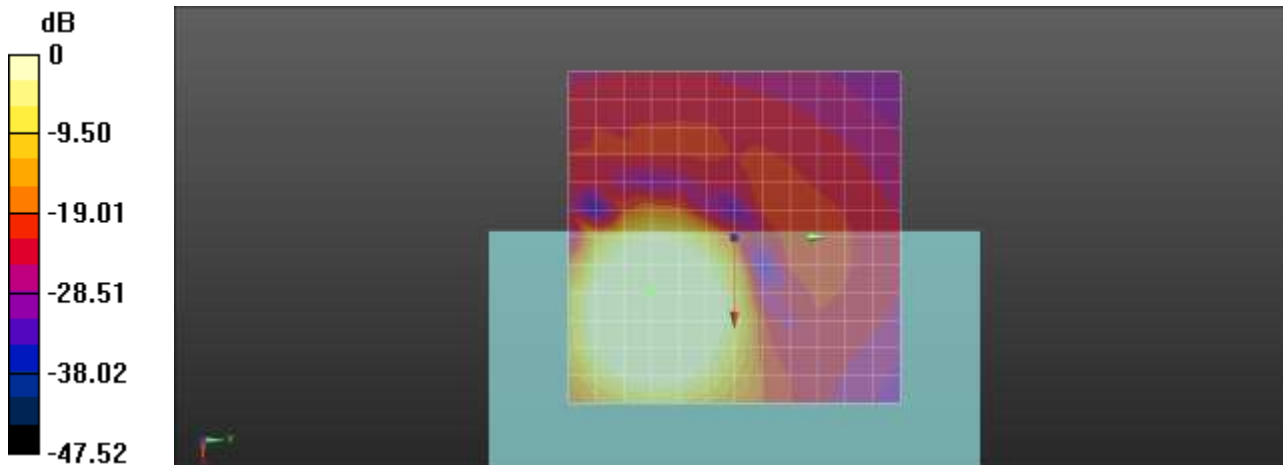

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.170**  
**EVDO BC1 Rev.A 600ch Bit rate 75 Freq.Response**

Communication System: UID 0, CDMA BC1 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.27 dB  
BWC Factor = 9.47 dB  
Location: 9.9, -11, 3.7 mm

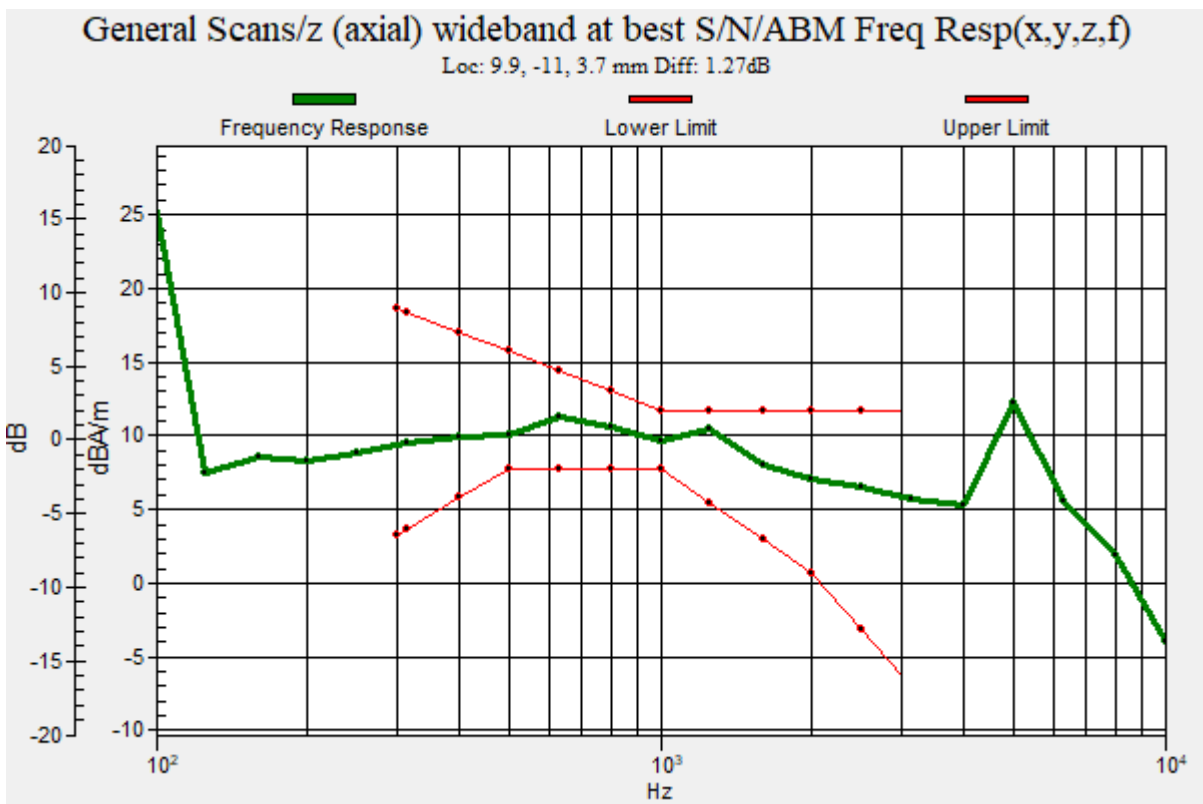

**Plot No.171**  
**EVDO BC1 Rev.A 600ch Bit rate 75 y(transversal)**

Communication System: UID 0, CDMA BC1 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = -1.30 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -4.2, 3.7 mm

**Cursor:**

ABM2 = -48.70 dBA/m  
Location: 4.2, -4.2, 3.7 mm

**Cursor:**

ABM1/ABM2 = 47.40 dB  
ABM1 comp = -1.30 dBA/m  
BWC Factor = 0.15 dB  
Location: 4.2, -4.2, 3.7 mm

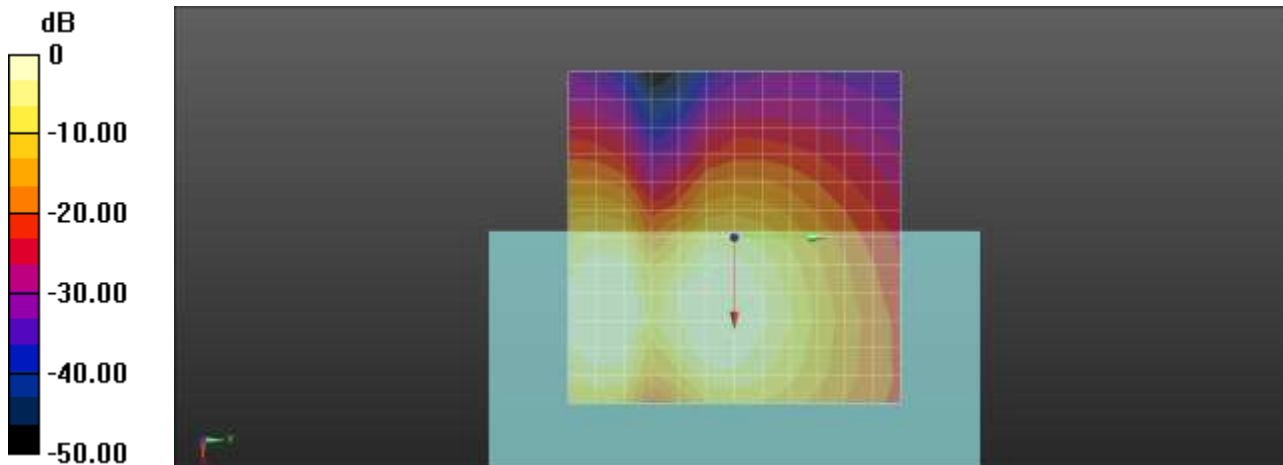

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.172**  
**EVDO BC10 Rev.A 560ch Bit rate 75 z(axial)**

Communication System: UID 0, BC10 (0); Frequency: 822.75 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 10.15 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM2 = -40.54 dBA/m  
Location: 8.3, -12.5, 3.7 mm

**Cursor:**

ABM1/ABM2 = 50.69 dB  
ABM1 comp = 10.15 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -12.5, 3.7 mm

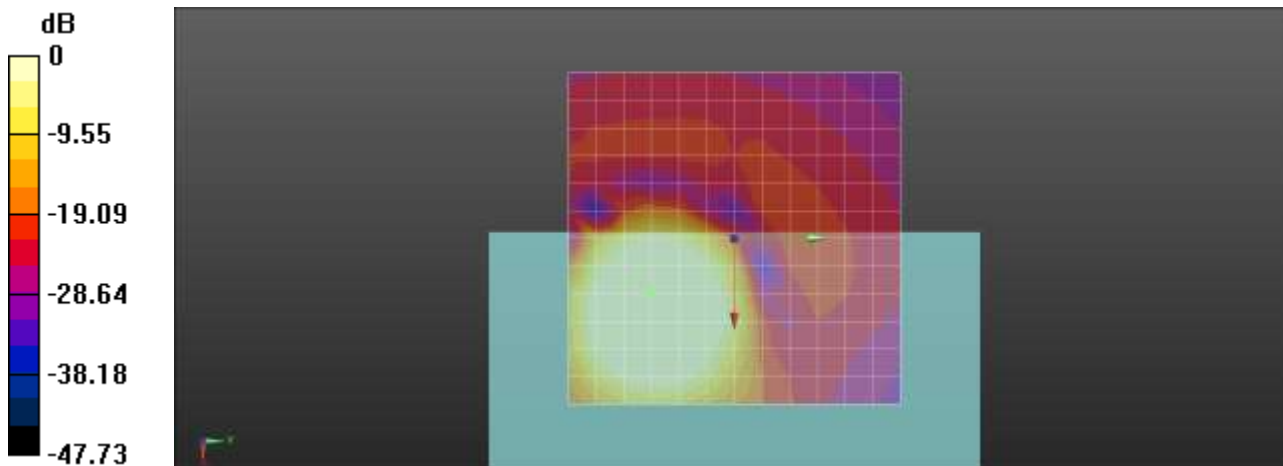

0 dB = 1.000 A/m = 0.00 dBA/m


**Plot No.173**  
**EVDO BC10 Rev.A 560ch Bit rate 75 Freq.Response**

Communication System: UID 0, BC10 (0); Frequency: 822.75 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_Normal\_51s new.wav  
Output Gain: 58.8  
Measure Window Start: 300ms  
Measure Window Length: 51000ms  
BWC applied: 9.47 dB  
Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB  |
| Category T2 | 10 dB to 20 dB   |
| Category T3 | 20 dB to 30 dB   |
| Category T4 | > 30 dB  |

**Cursor:**  
Diff = 1.29 dB  
BWC Factor = 9.47 dB  
Location: 10.2, -10.9, 3.7 mm

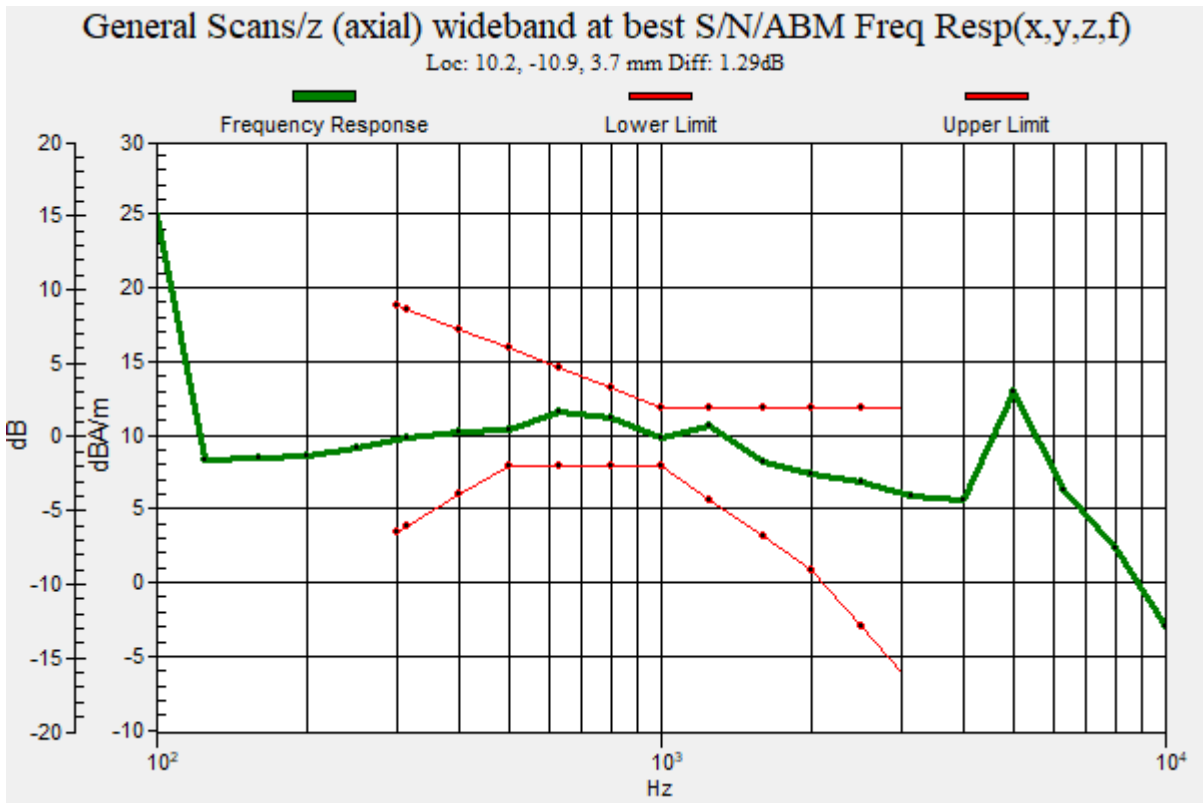

**Plot No.174**  
**EVDO BC10 560ch Bit rate 75 y(transversal)**

Communication System: UID 0, BC10 (0); Frequency: 822.75 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3049; ; Calibrated: 2020-05-26
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1417; Calibrated: 2021-02-22
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**


ABM1 comp = 1.48 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -4.2, 3.7 mm

**Cursor:**

ABM2 = -46.29 dBA/m  
Location: 8.3, -4.2, 3.7 mm

**Cursor:**

ABM1/ABM2 = 47.77 dB  
ABM1 comp = 1.48 dBA/m  
BWC Factor = 0.15 dB  
Location: 8.3, -4.2, 3.7 mm

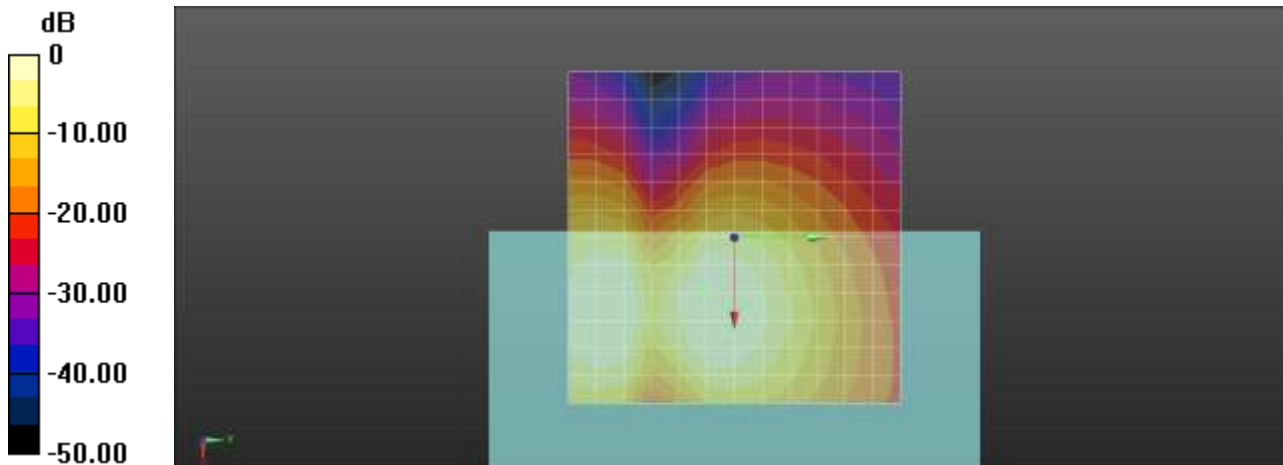

0 dB = 1.000 A/m = 0.00 dBA/m

**Plot No.175**  
**NR Band 66 CP-OFDM QPSK 40MHz 108RB 0offset 349000ch z(axial)**


Communication System: UID 0, NR Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM = -44.22 dBA/m  
Location: 8.3, -12.5, 3.7 mm

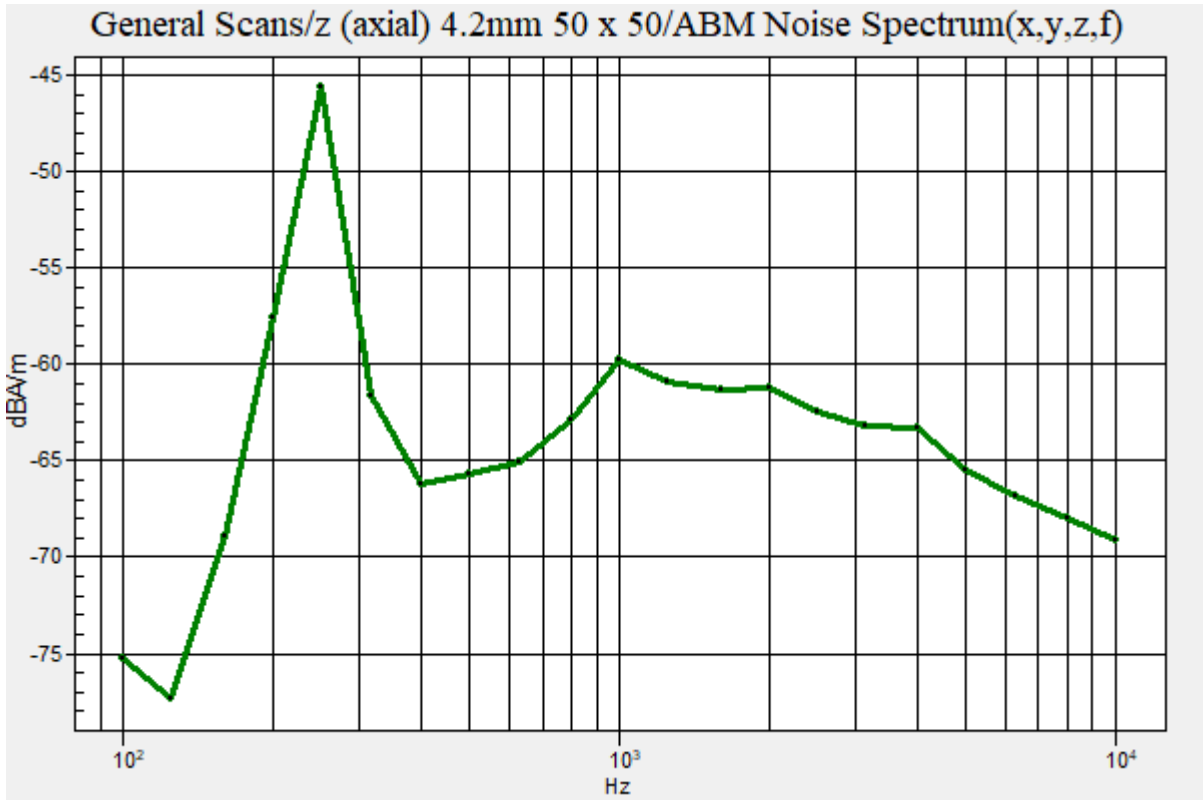



**Plot No.176**

**NR Band 66 CP-OFDM QPSK 40MHz 108RB 0offset 349000ch y(transversal)**

Communication System: UID 0, NR Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -45.58 dBA/m

Location: 8.3, -8.3, 3.7 mm

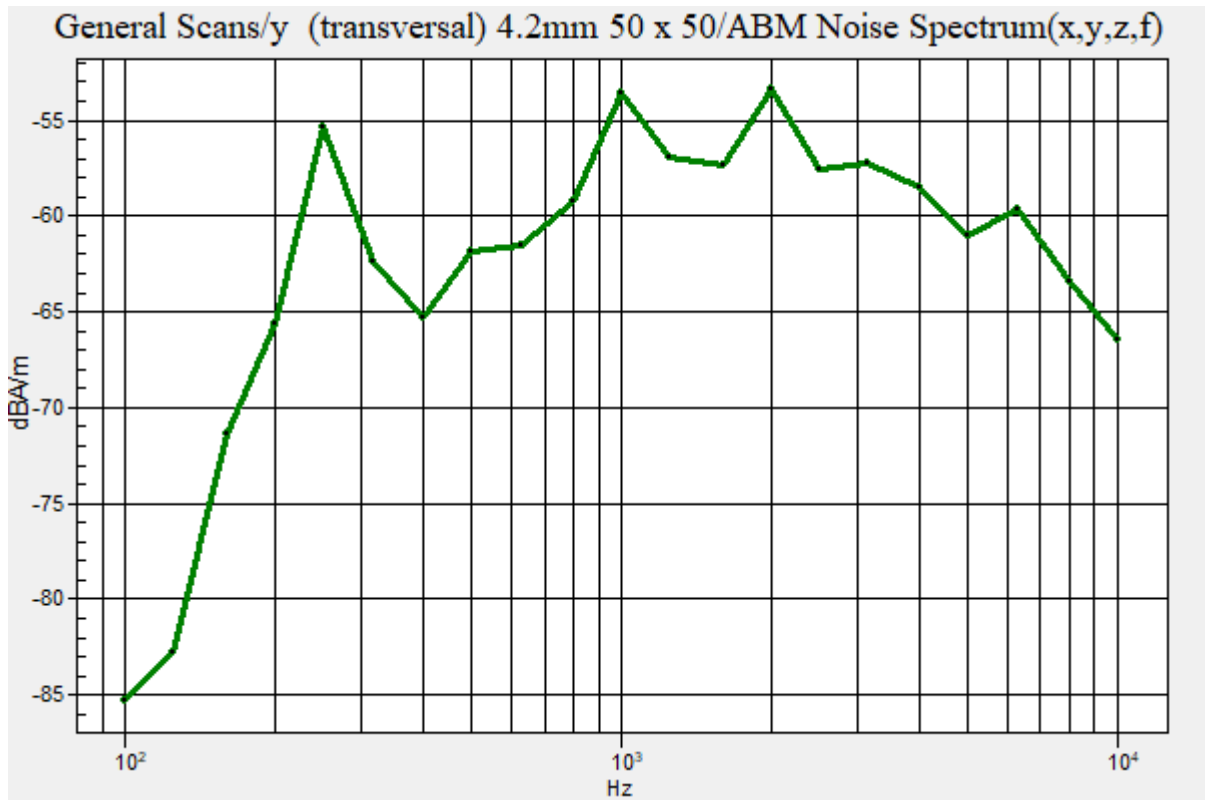

**Plot No.177**

**NR Band 2 CP-OFDM QPSK 20MHz 53RB 0offset 376000ch z(axial)**

Communication System: UID 0, NR Band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -49.19 dBA/m

Location: 8.3, -8.3, 3.7 mm

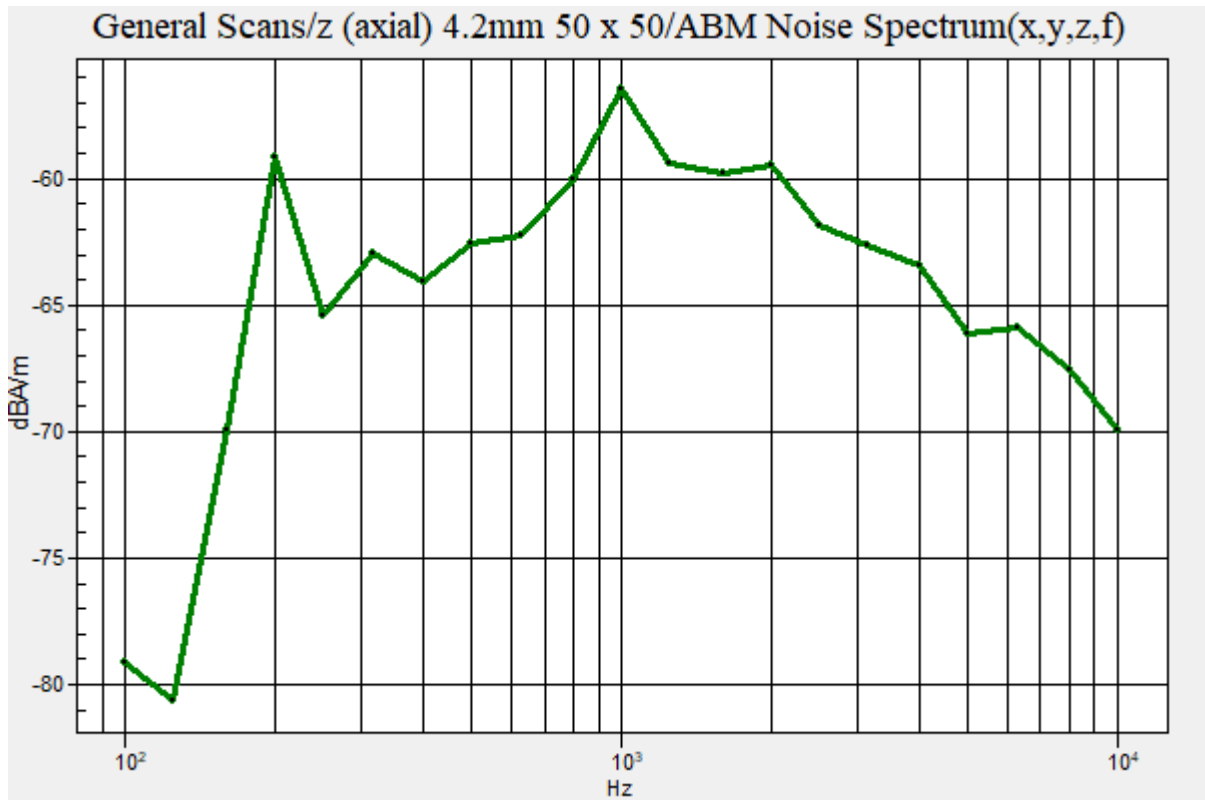

**Plot No.178**

**NR Band 2 CP-OFDM QPSK 20MHz 53RB 0offset 376000ch y(transversal)**

Communication System: UID 0, NR Band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -48.06 dBA/m

Location: 8.3, -8.3, 3.7 mm

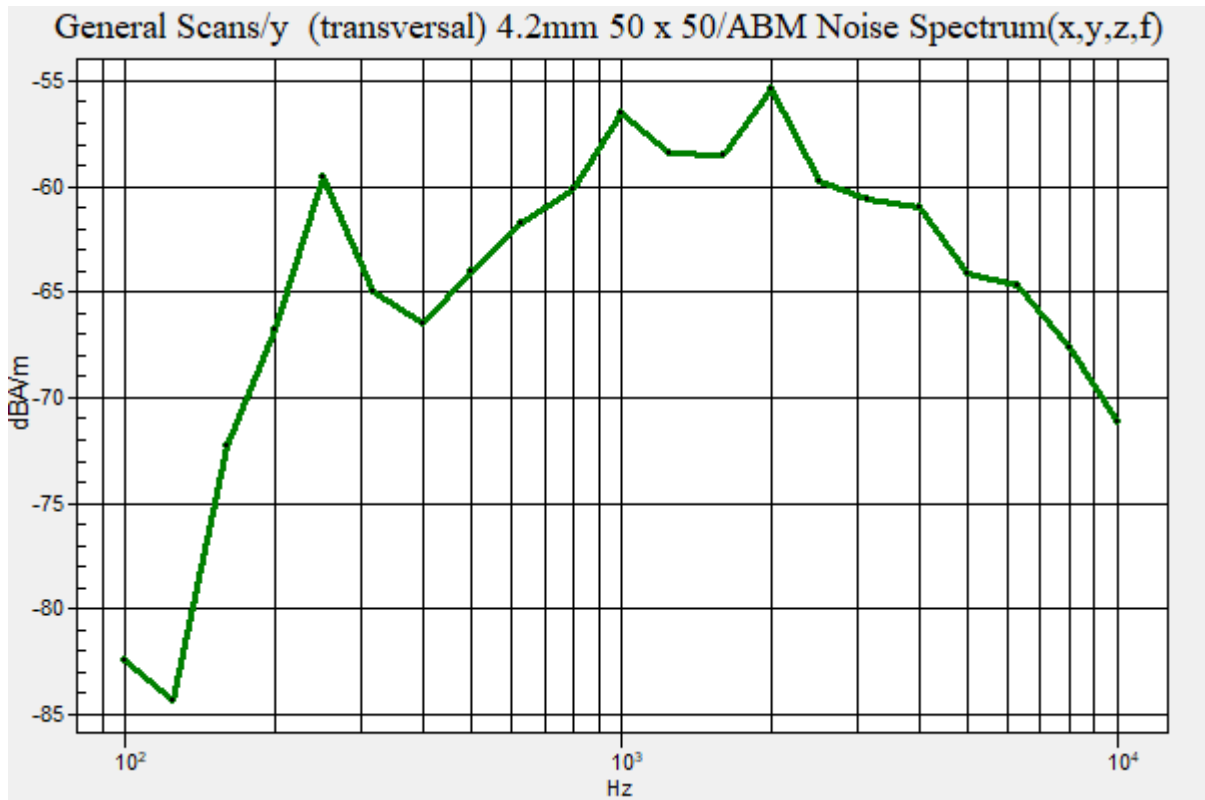

**Plot No.179**

**NR Band 5 CP-OFDM QPSK 20MHz 53RB 0offset 167300ch z(axial)**

Communication System: UID 0, NR Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -46.61 dBA/m

Location: 8.3, -12.5, 3.7 mm

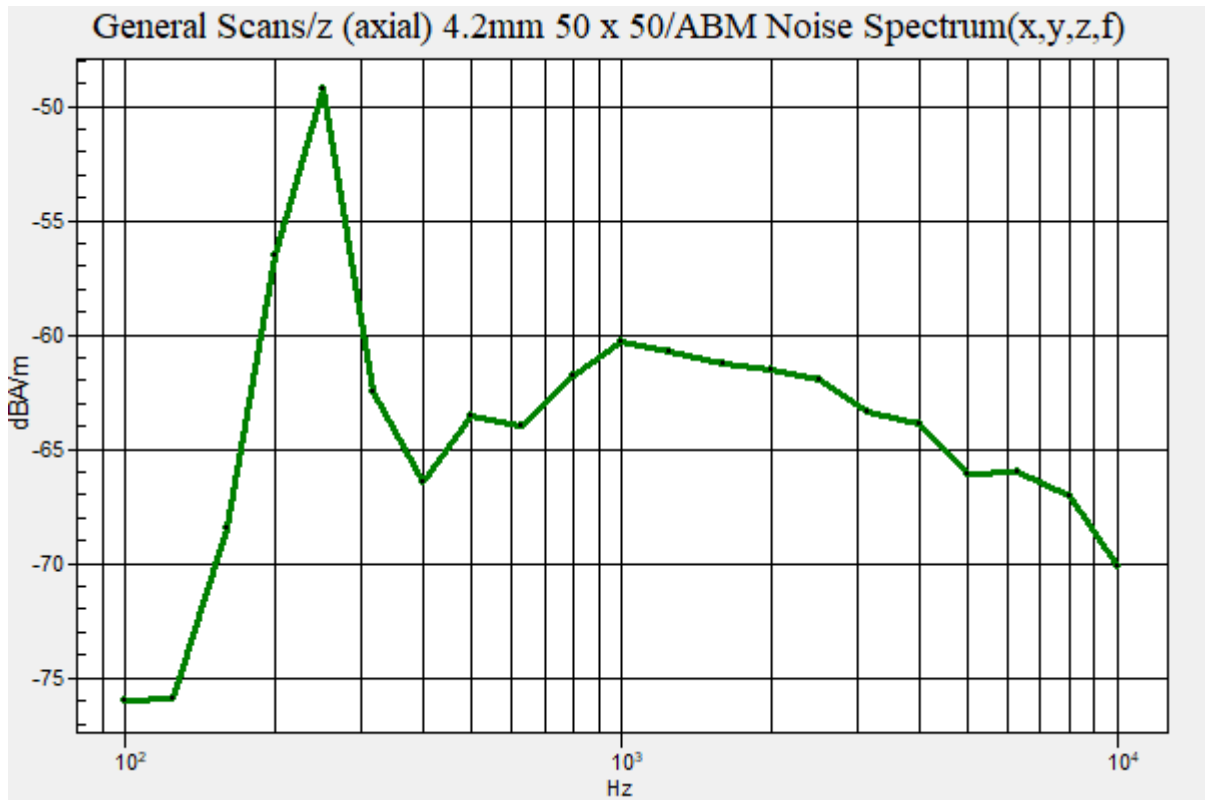

**Plot No.180**

**NR Band 5 CP-OFDM QPSK 20MHz 53RB 0offset 167300ch y(transversal)**

Communication System: UID 0, NR Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -47.80 dBA/m

Location: 8.3, -8.3, 3.7 mm

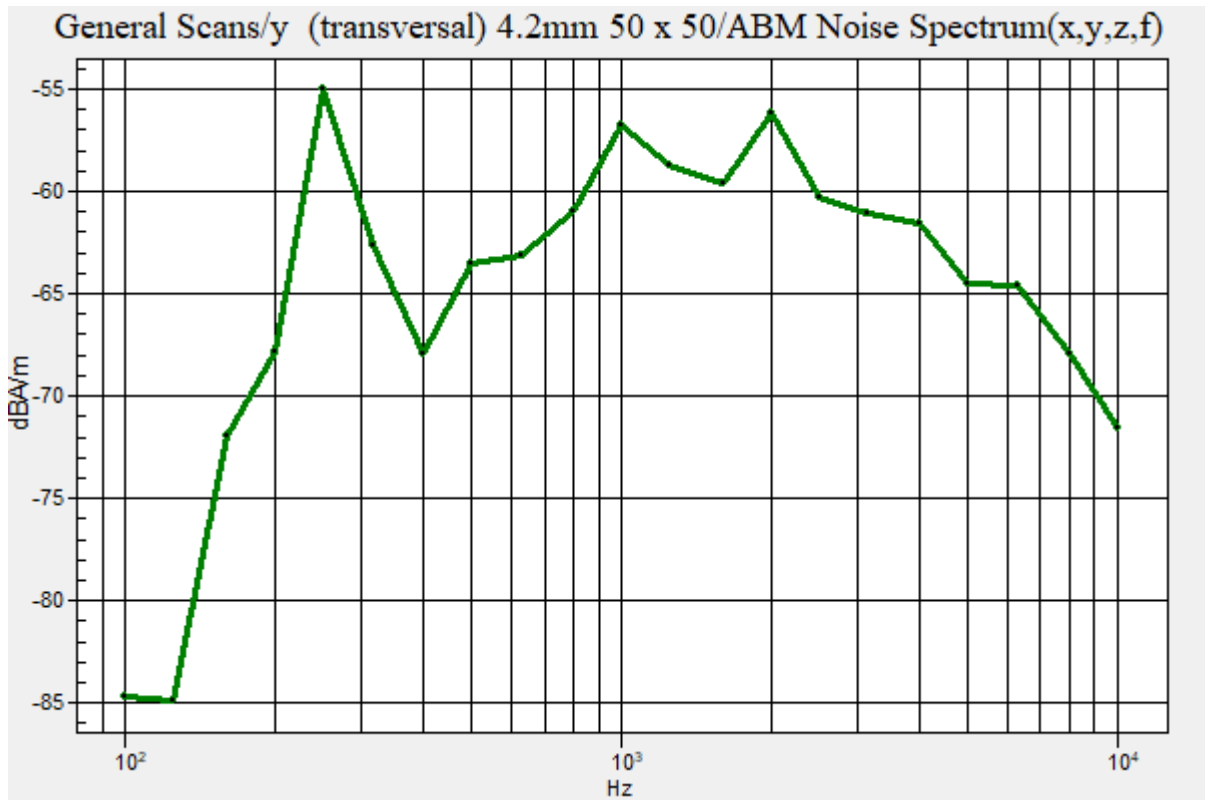

**Plot No.181**  
**NR Band 12 CP-OFDM QPSK 15MHz 40RB 0offset 141500ch z(axial)**


Communication System: UID 0, NR Band 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM = -51.72 dBA/m  
Location: 8.3, -8.3, 3.7 mm

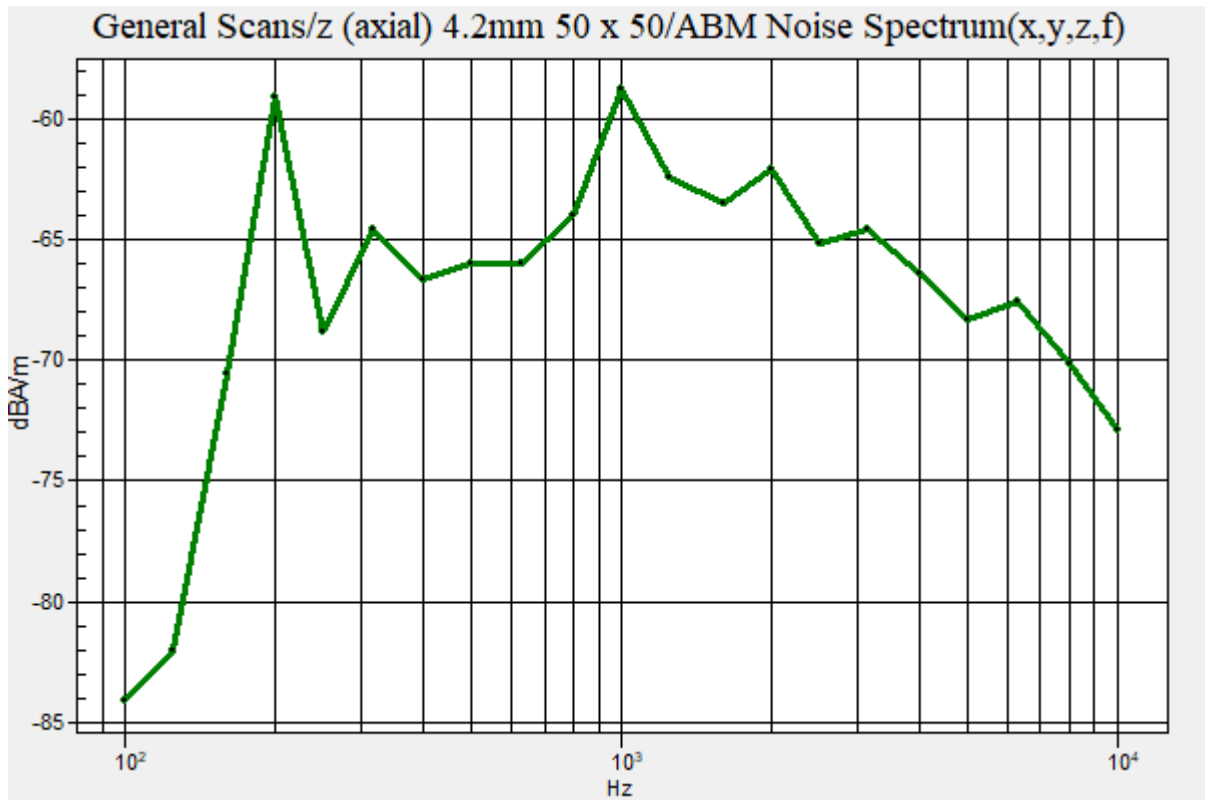

**Plot No.182**

**NR Band 12 CP-OFDM QPSK 15MHz 40RB 0offset 141500ch y(transversal)**

Communication System: UID 0, NR Band 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -50.21 dBA/m

Location: 8.3, -8.3, 3.7 mm

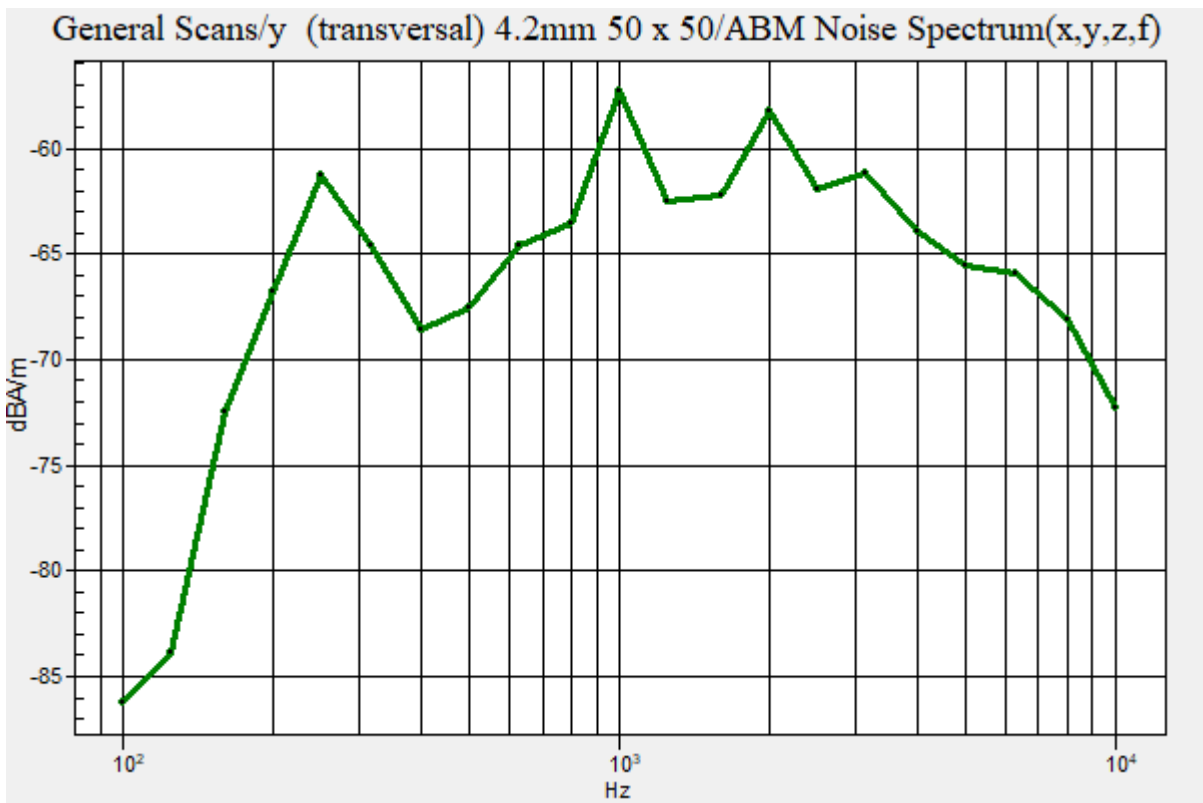

**Plot No.183**

**NR Band 25 CP-OFDM QPSK 40MHz 108RB 0offset 376500ch z(axial)**

Communication System: UID 0, NR n25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -49.40 dBA/m

Location: 8.3, -12.5, 3.7 mm

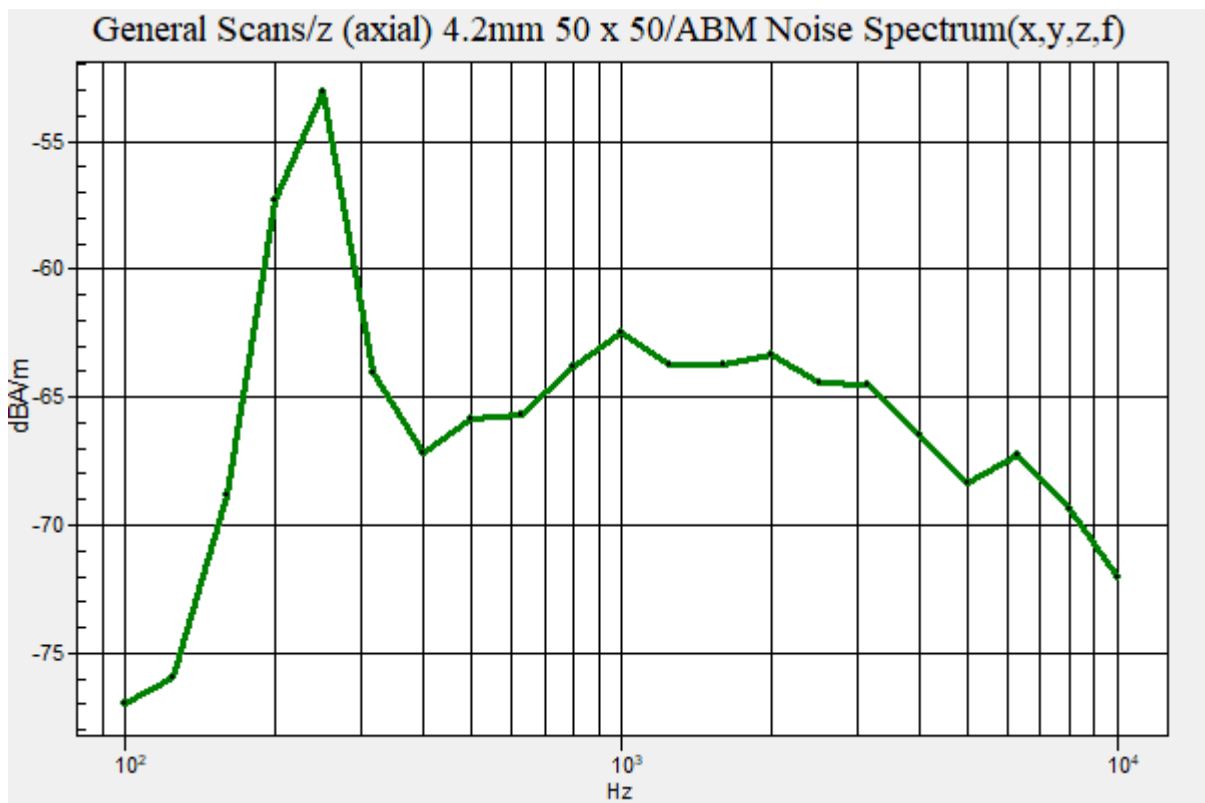



**Plot No.184**

**NR Band 25 CP-OFDM QPSK 40MHz 108RB 0offset 376500ch y(transversal)**

Communication System: UID 0, NR n25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -49.75 dBA/m

Location: 8.3, -8.3, 3.7 mm

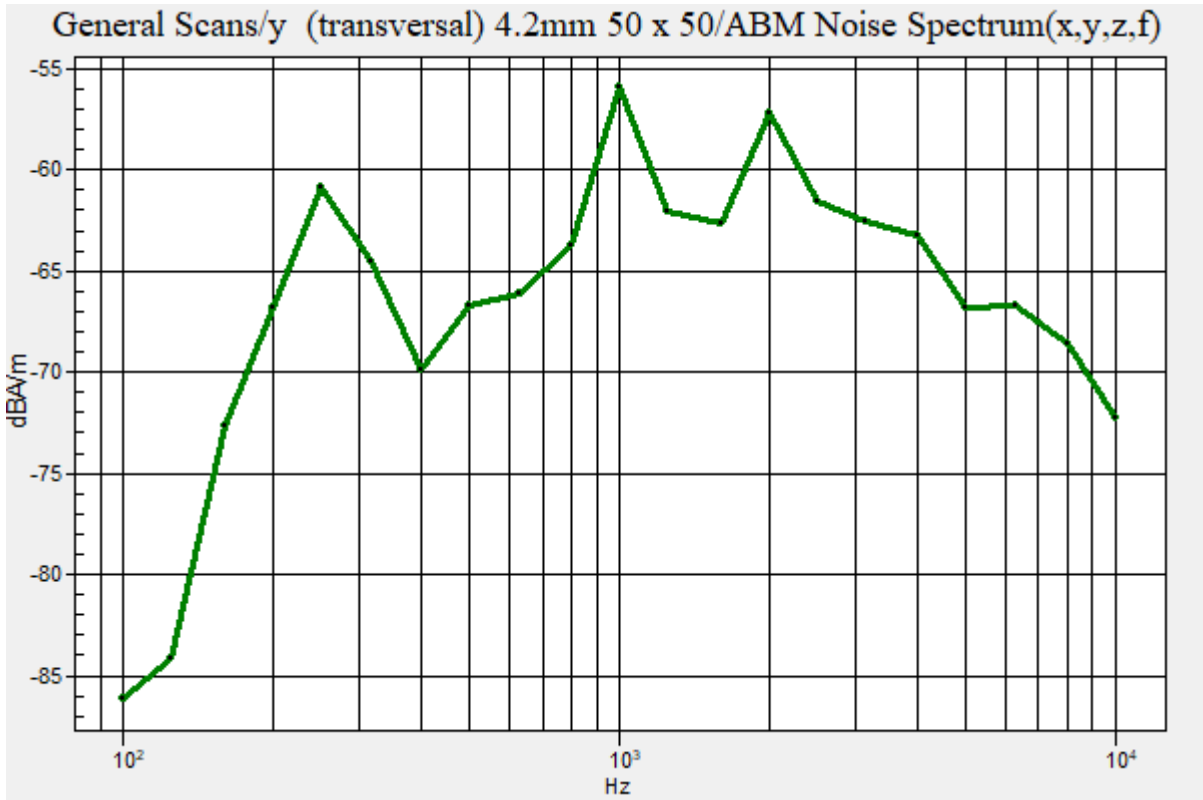

**Plot No.185**  
**NR Band 30 CP-OFDM QPSK 10MHz 26RB 0offset 462000ch z(axial)**


Communication System: UID 0, NR n30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM = -46.72 dBA/m  
Location: 8.3, -12.5, 3.7 mm

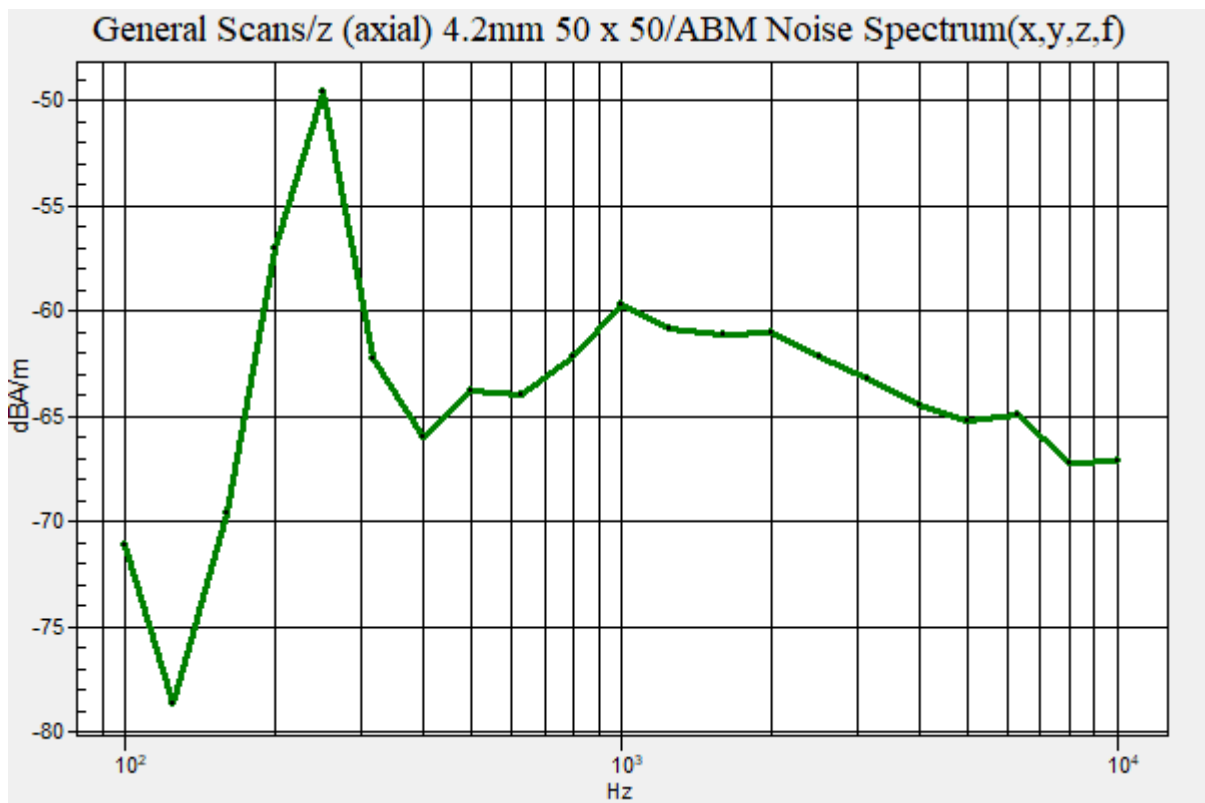

**Plot No.186**

**NR Band 30 CP-OFDM QPSK 10MHz 26RB 0offset 462000ch y(transversal)**

Communication System: UID 0, NR n30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -47.83 dBA/m

Location: 8.3, -8.3, 3.7 mm

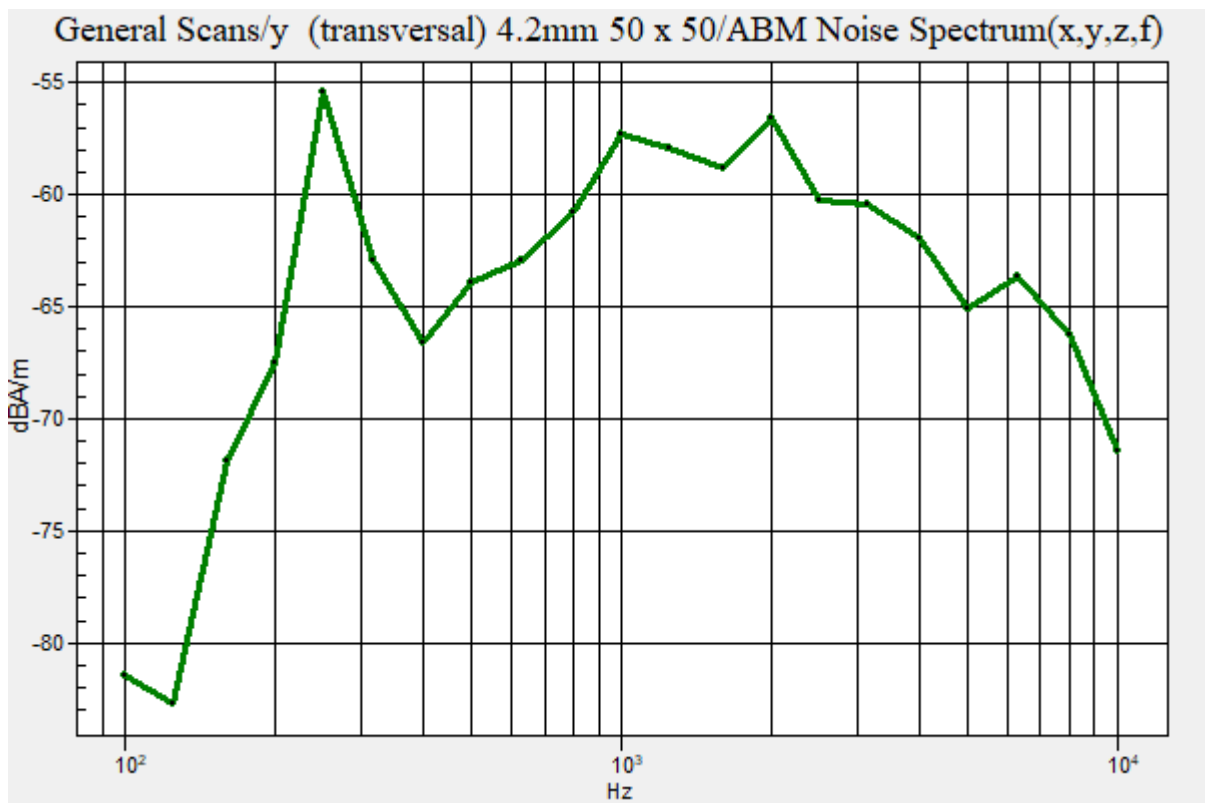

**Plot No.187**  
**NR Band 71 CP-OFDM QPSK 20MHz 53RB 0offset 136100ch z(axial)**


Communication System: UID 0, NR Band 71 (0); Frequency: 680.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM = -43.76 dBA/m  
Location: 8.3, -12.5, 3.7 mm

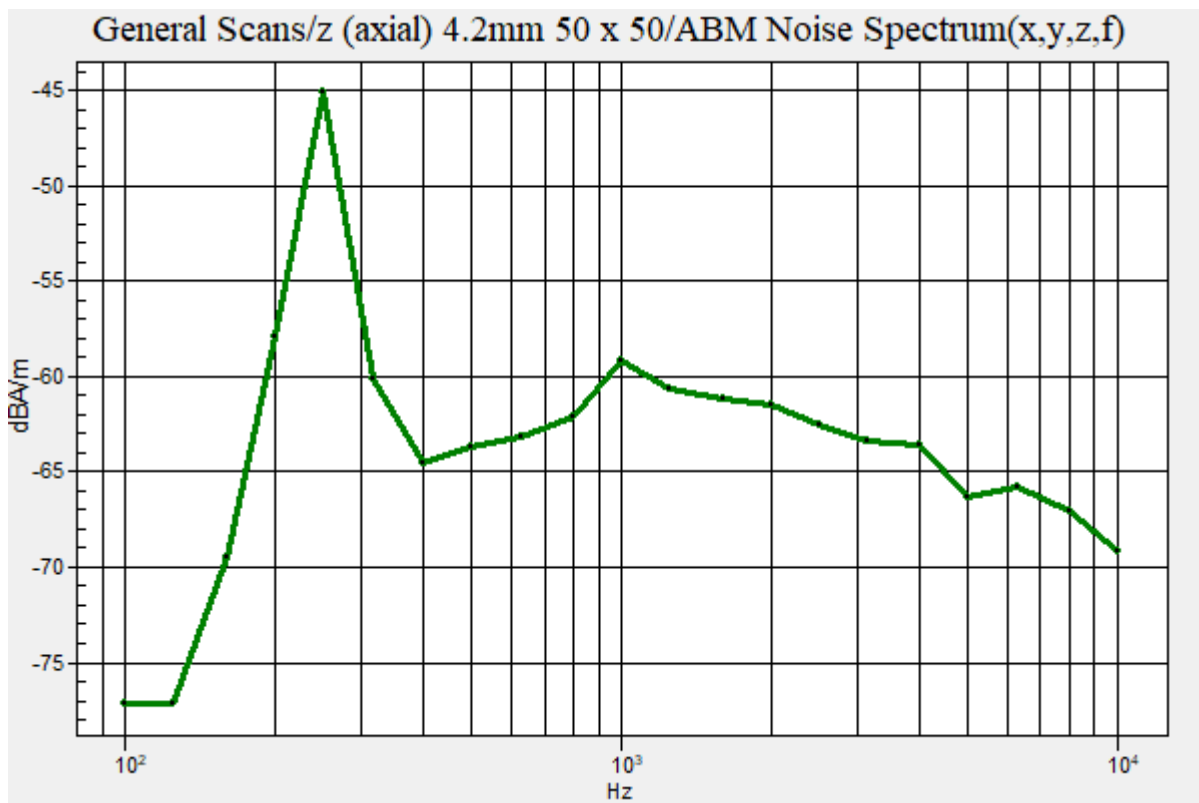

**Plot No.188**  
**NR Band 71 CP-OFDM QPSK 20MHz 53RB 0offset 136100ch y(transversal)**


Communication System: UID 0, NR Band 71 (0); Frequency: 680.5 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM = -48.95 dBA/m  
Location: 8.3, -8.3, 3.7 mm

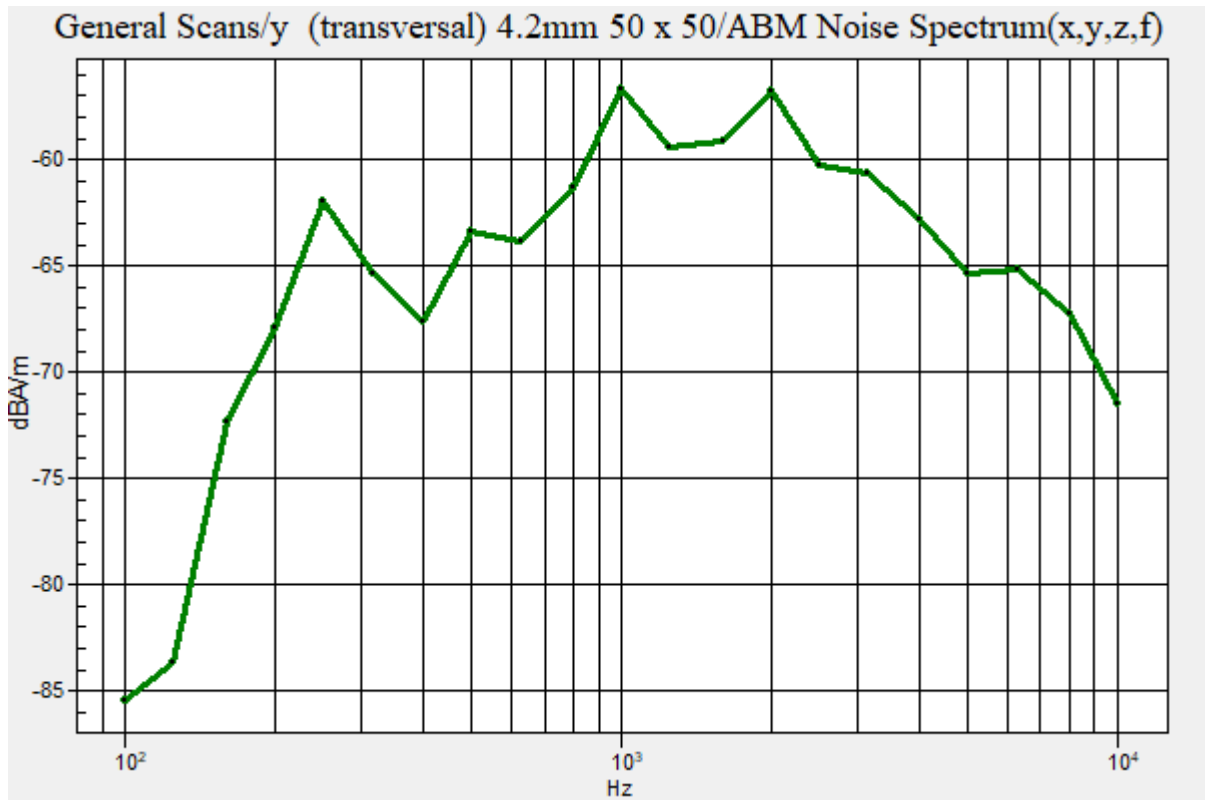

**Plot No.189**  
**NR Band 66 CP-OFDM QPSK 40MHz 108RB 0offset 346000ch z(axial)**


Communication System: UID 0, NR Band 66 (0); Frequency: 1730 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM = -45.43 dBA/m  
Location: 8.3, -12.5, 3.7 mm

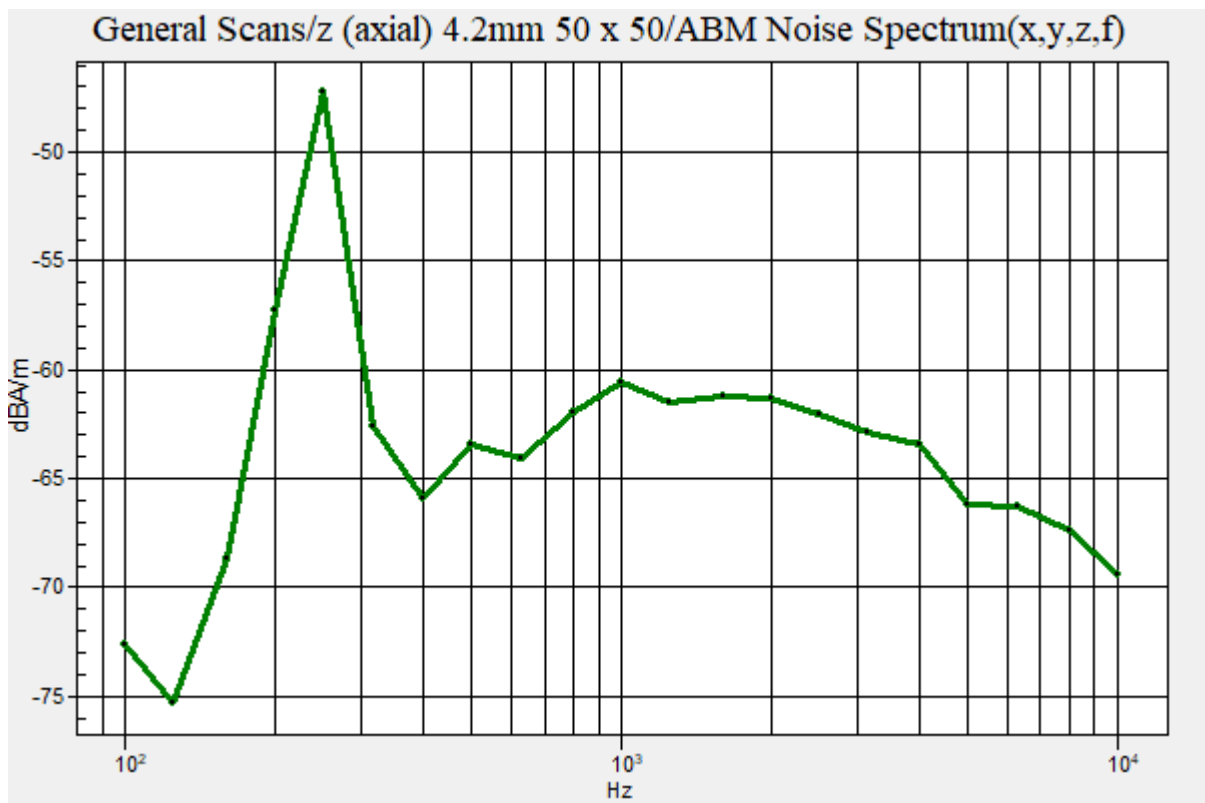

**Plot No.190**

**NR Band 66 CP-OFDM QPSK 40MHz 108RB 0offset 346000ch y(transversal)**

Communication System: UID 0, NR Band 66 (0); Frequency: 1730 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -47.23 dBA/m

Location: 8.3, -8.3, 3.7 mm

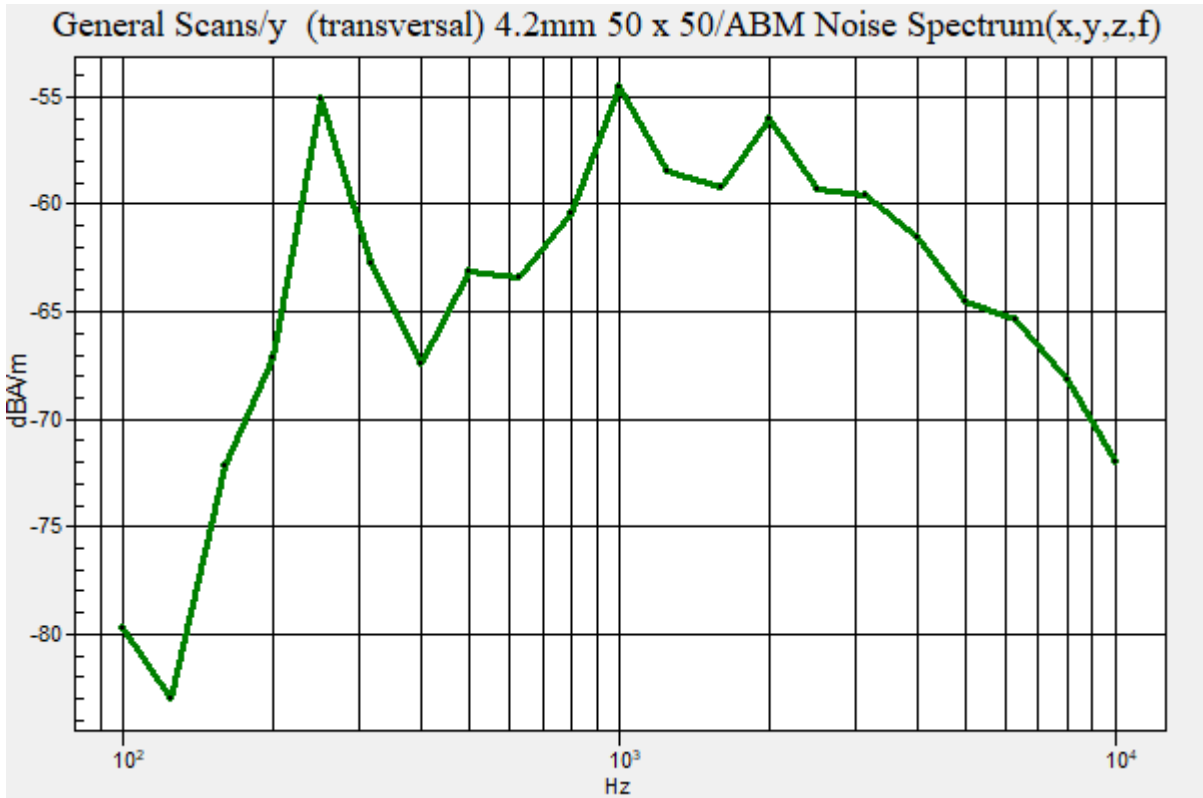

**Plot No.191**

**NR Band 66 CP-OFDM QPSK 40MHz 108RB 0offset 352000ch z(axial)**

Communication System: UID 0, NR Band 66 (0); Frequency: 1760 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x**

**50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -44.85 dBA/m

Location: 8.3, -12.5, 3.7 mm

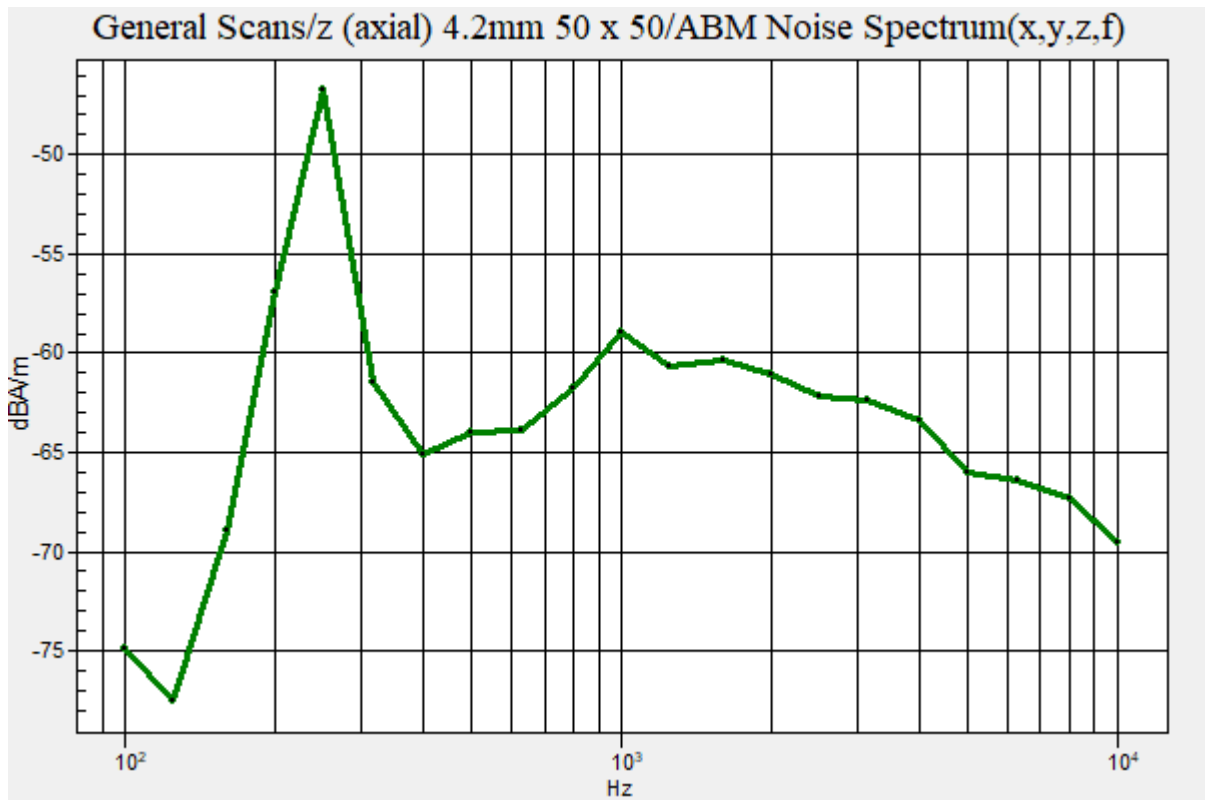



**Plot No.192**

**NR Band 66 CP-OFDM QPSK 40MHz 108RB 0offset 352000ch y(transversal)**

Communication System: UID 0, NR Band 66 (0); Frequency: 1760 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -47.28 dBA/m

Location: 8.3, -8.3, 3.7 mm

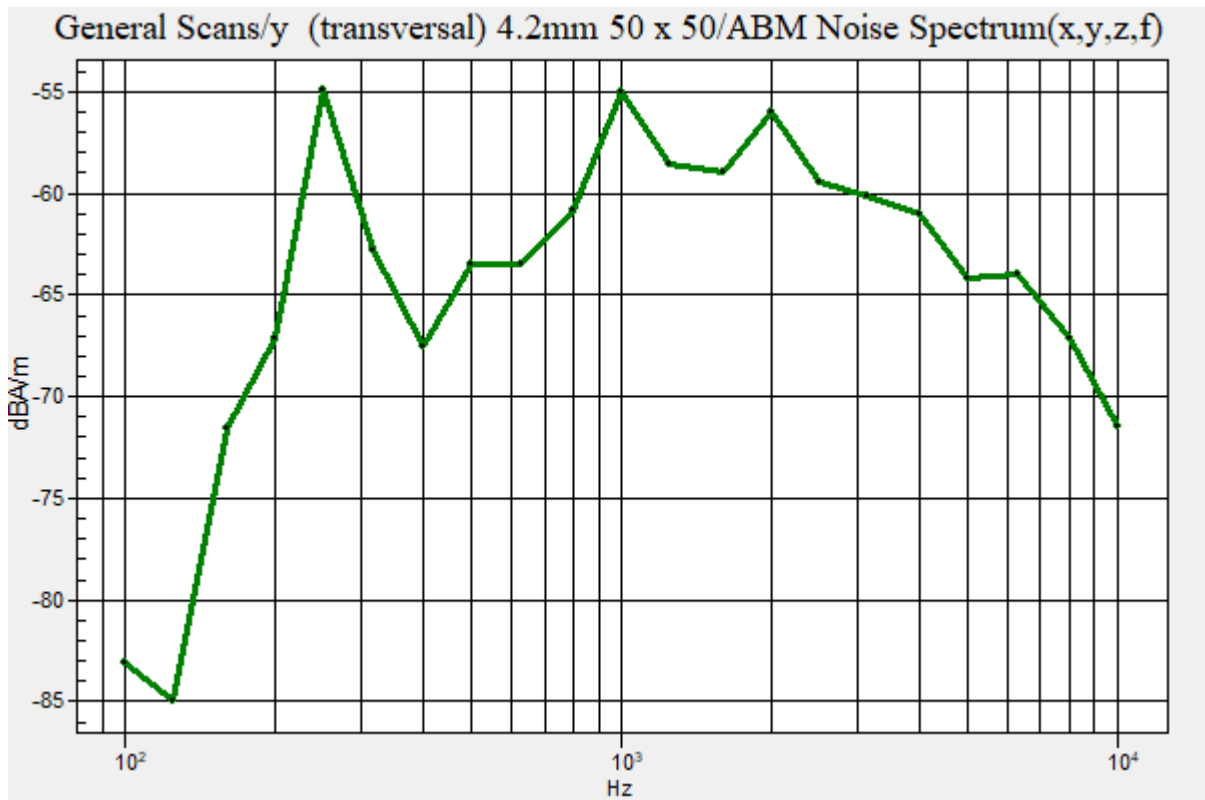

**Plot No.193**  
**NR Band 77 CP-OFDM QPSK 20MHz 26RB 0offset 650000ch z(axial)**


Communication System: UID 0, NR Band 77 (0); Frequency: 3750 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM = -37.39 dBA/m  
Location: 8.3, -12.5, 3.7 mm

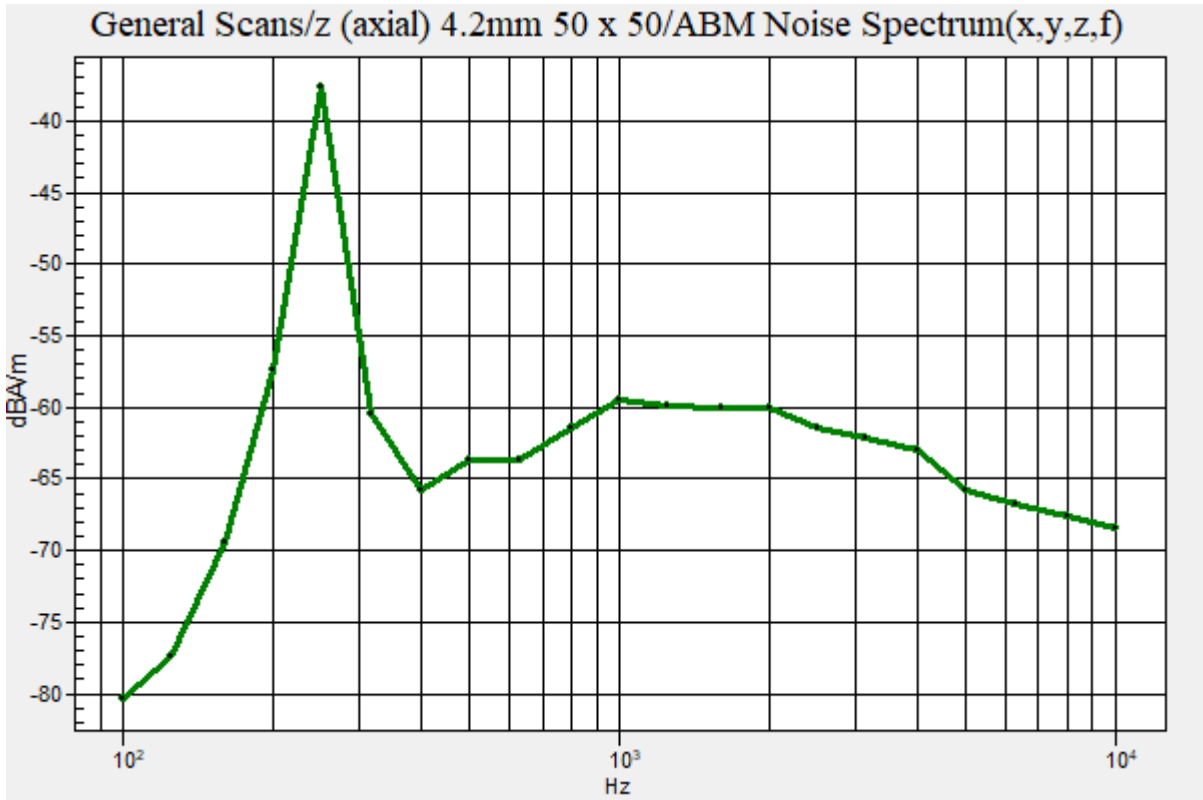

**Plot No.194**

**NR Band 77 CP-OFDM QPSK 20MHz 26RB 0offset 650000ch y(transversal)**

Communication System: UID 0, NR Band 77 (0); Frequency: 3750 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -47.93 dBA/m

Location: 8.3, -8.3, 3.7 mm

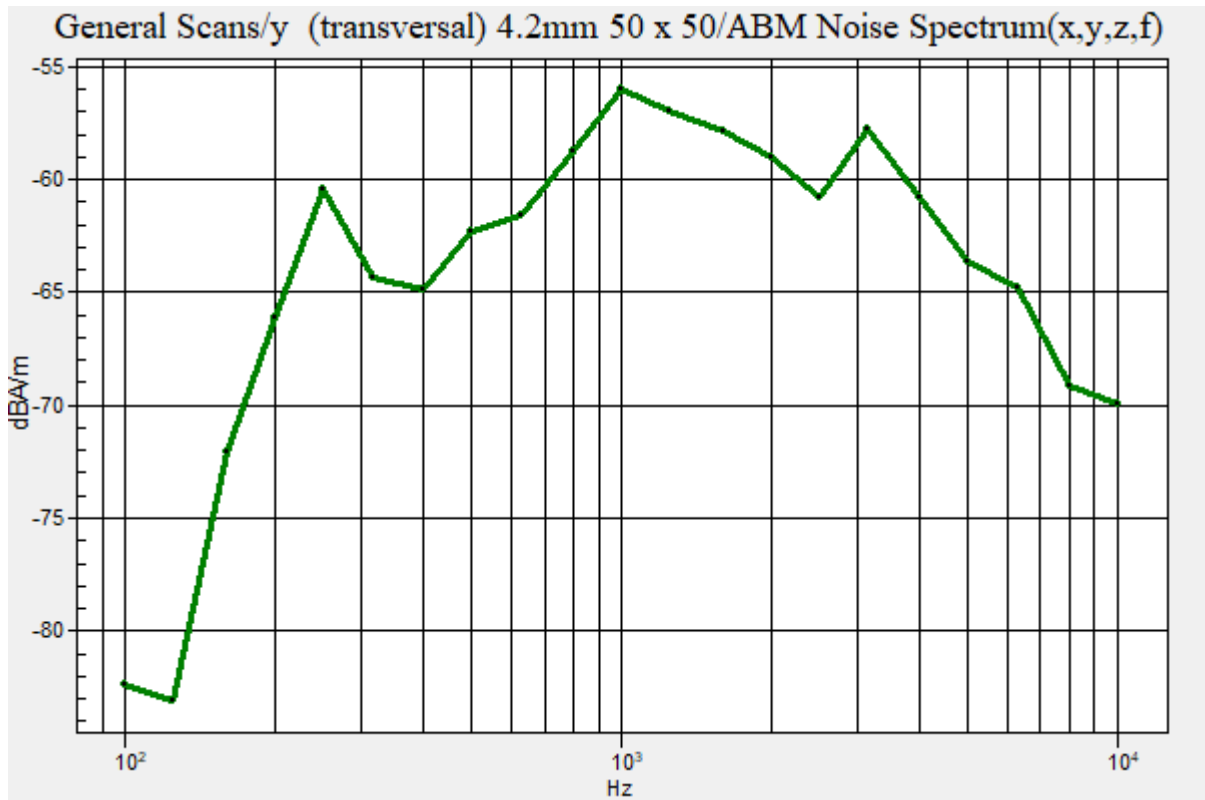

**Plot No.195**  
**NR Band 41 CP-OFDM QPSK 20MHz 26RB 0offset 518598ch z(axial)**


Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:1  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 19.32  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
Device Reference Point: 0, 0, -6.3 mm

**Cursor:**  
ABM = -36.81 dBA/m  
Location: 8.3, -12.5, 3.7 mm

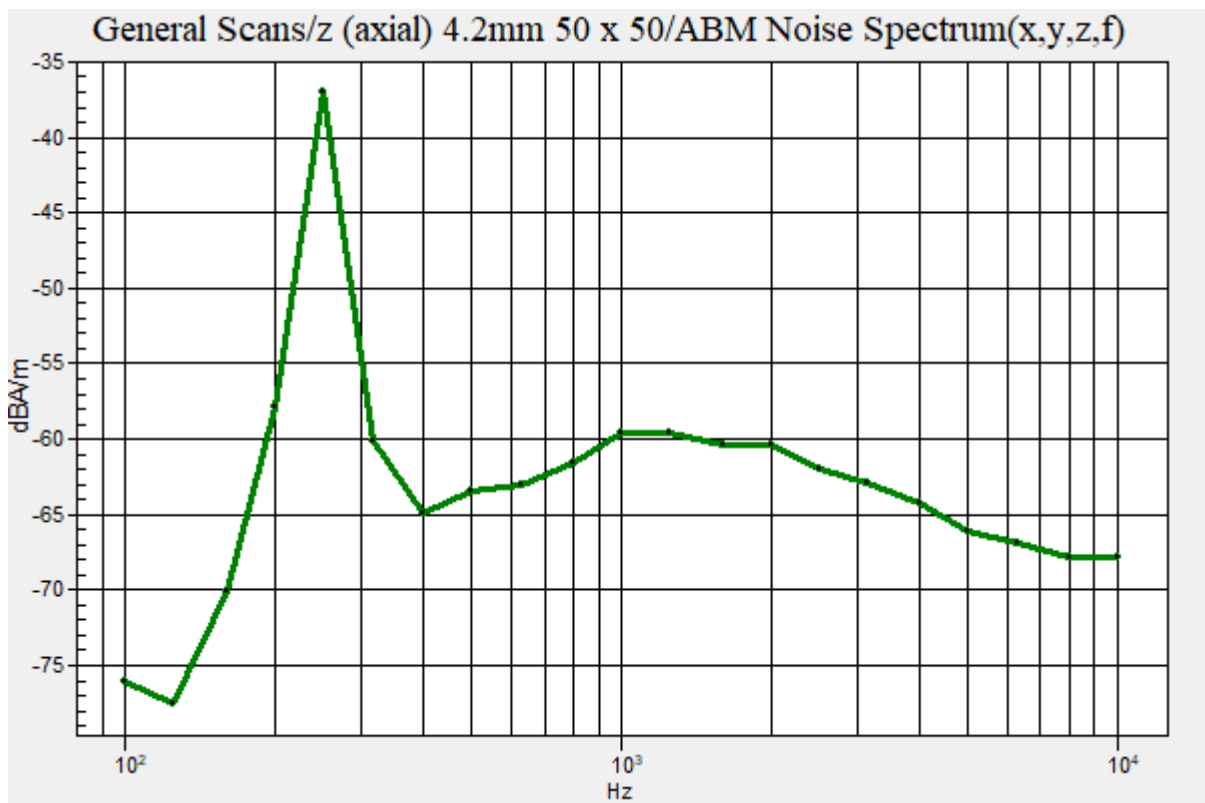

**Plot No.196**

**NR Band 41 CP-OFDM QPSK 20MHz 26RB 0offset 518598ch y(transversal)**

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050; ; Calibrated: 2020-11-27
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (3)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50**

**x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 19.32

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

**Cursor:**

ABM = -48.25 dBA/m

Location: 8.3, -8.3, 3.7 mm

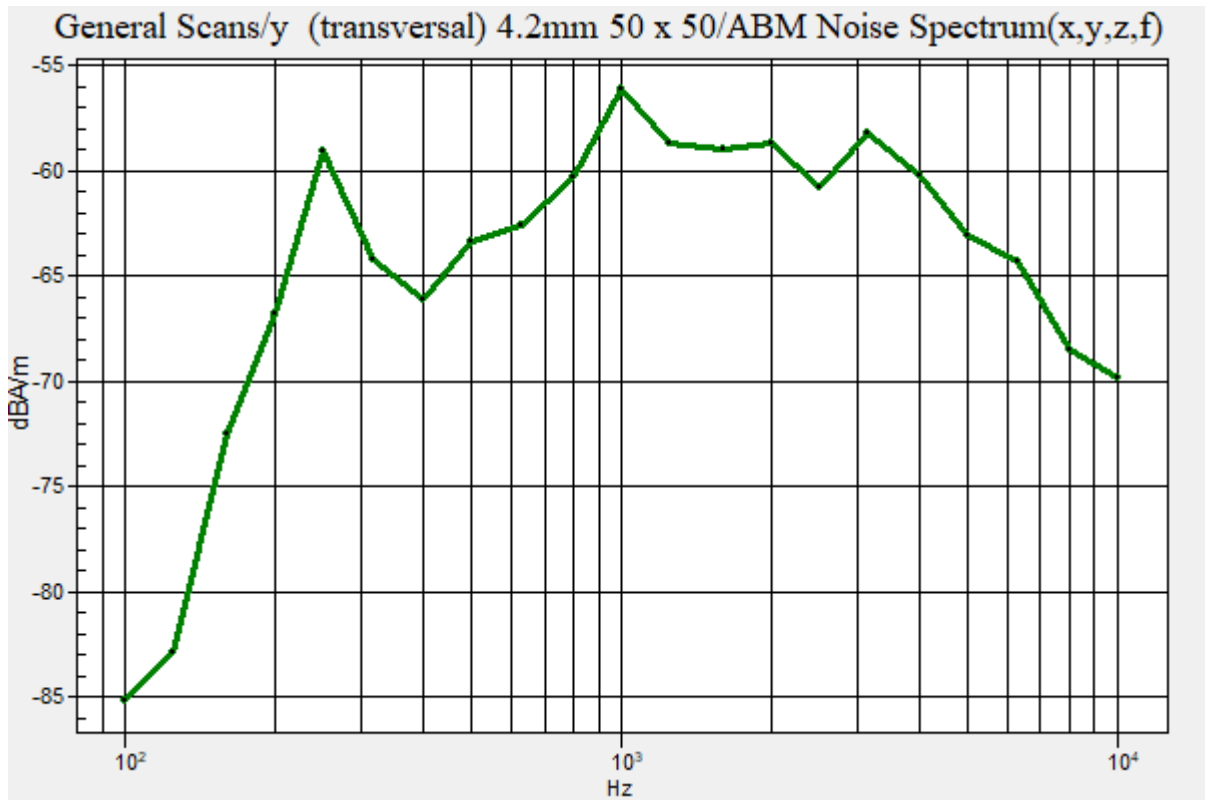

## Attachment 2. HAC T-Coil Probe Certificates

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **HCT (Dymstec)**

Certificate No: **AM1DV3-3049\_May20**

| CALIBRATION CERTIFICATE   |  |  |                                 |   |     |     |   |                    |                    |       |             |            |     |             |             |
|---|--|--|---------------------------------|---|-----|-----|---|--------------------|--------------------|-------|-------------|------------|-----|-------------|-------------|
| Object  | AM1DV3 - SN: 3049  |  |                                 |   |     |     |   |                    |                    |       |             |            |     |             |             |
| Calibration procedure(s)  | QA CAL-24.v4<br>Calibration procedure for AM1D magnetic field probes and TMFS in the audio range |  |                                 |   |     |     |   |                    |                    |       |             |            |     |             |             |
| Calibration date:   | May 26, 2020   | <table border="1"> <tr> <td>결</td> <td>담당자</td> <td>확인자</td> </tr> <tr> <td>제</td> <td><i>[Signature]</i></td> <td><i>[Signature]</i></td> </tr> <tr> <td>직원/성명</td> <td>SW 12.01.19</td> <td>KS 1.12.19</td> </tr> <tr> <td>일 자</td> <td>2020. 6. 16</td> <td>2020. 6. 16</td> </tr> </table> |                                 | 결 | 담당자 | 확인자 | 제 | <i>[Signature]</i> | <i>[Signature]</i> | 직원/성명 | SW 12.01.19 | KS 1.12.19 | 일 자 | 2020. 6. 16 | 2020. 6. 16 |
| 결   | 담당자  | 확인자  |                                 |   |     |     |   |                    |                    |       |             |            |     |             |             |
| 제   | <i>[Signature]</i>   | <i>[Signature]</i>   |                                 |   |     |     |   |                    |                    |       |             |            |     |             |             |
| 직원/성명   | SW 12.01.19  | KS 1.12.19   |                                 |   |     |     |   |                    |                    |       |             |            |     |             |             |
| 일 자   | 2020. 6. 16  | 2020. 6. 16  |                                 |   |     |     |   |                    |                    |       |             |            |     |             |             |
| This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).<br>The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. |  |  |                                 |   |     |     |   |                    |                    |       |             |            |     |             |             |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.  |  |  |                                 |   |     |     |   |                    |                    |       |             |            |     |             |             |
| Calibration Equipment used (M&TE critical for calibration)  |  |  |                                 |   |     |     |   |                    |                    |       |             |            |     |             |             |
| Primary Standards   | ID #   | Cal Date (Certificate No.)   | Scheduled Calibration           |   |     |     |   |                    |                    |       |             |            |     |             |             |
| Keithley Multimeter Type 2001   | SN: 0810278  | 03-Sep-19 (No. 25949)  | Sep-20                          |   |     |     |   |                    |                    |       |             |            |     |             |             |
| Reference Probe AM1DV2  | SN: 1008   | 10-Dec-19 (No. AM1DV2-1008_Dec19)  | Dec-20                          |   |     |     |   |                    |                    |       |             |            |     |             |             |
| DAE4  | SN: 781  | 27-Dec-19 (No. DAE4-781_Dec19)   | Dec-20                          |   |     |     |   |                    |                    |       |             |            |     |             |             |
| Secondary Standards   | ID #   | Check Date (in house)  | Scheduled Check                 |   |     |     |   |                    |                    |       |             |            |     |             |             |
| AMCC  | SN: 1050   | 01-Oct-13 (in house check Oct-17)  | Oct-20                          |   |     |     |   |                    |                    |       |             |            |     |             |             |
| AMMI Audio Measuring Instrument   | SN: 1062   | 26-Sep-12 (in house check Oct-17)  | Oct-20                          |   |     |     |   |                    |                    |       |             |            |     |             |             |
| Calibrated by:  | Name<br>Leif Klysner   | Function<br>Laboratory Technician  | Signature<br><i>[Signature]</i> |   |     |     |   |                    |                    |       |             |            |     |             |             |
| Approved by:  | Name<br>Katja Pokovic  | Function<br>Technical Manager  | Signature<br><i>[Signature]</i> |   |     |     |   |                    |                    |       |             |            |     |             |             |
|   |  |  | Issued: May 27, 2020            |   |     |     |   |                    |                    |       |             |            |     |             |             |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.   |  |  |                                 |   |     |     |   |                    |                    |       |             |            |     |             |             |



**References**

- [1] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2011  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [3] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

**Description of the AM1D probe**

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1+2]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1+2] without additional shielding.

**Handling of the item**

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

**Methods Applied and Interpretation of Parameters**

- *Coordinate System:* The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [3], with the tip pointing to "southwest" orientation.
- *Functional Test:* The functional test preceding calibration includes test of Noise level RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected. Frequency response verification from 100 Hz to 10 kHz.
- *Connector Rotation:* The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- *Sensor Angle:* The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.
- *Sensitivity:* With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.



**AM1D probe identification and configuration data**

|           |   |
|-----------|---|
| Item      | <b>AM1DV3</b> Audio Magnetic 1D Field Probe |
| Type No   | SP AM1 001 BA                               |
| Serial No | <b>3049</b>                                 |

|                    |                                    |
|--------------------|------------------------------------|
| Overall length     | 296 mm                             |
| Tip diameter       | 6.0 mm (at the tip)                |
| Sensor offset      | 3.0 mm (centre of sensor from tip) |
| Internal Amplifier | 20 dB                              |

|                       |  |
|-----------------------|--|
| Manufacturer / Origin | Schmid & Partner Engineering AG, Zurich, Switzerland |
|-----------------------|--|

**Calibration data**

|                          |                  |                        |                 |
|--------------------------|------------------|------------------------|-----------------|
| Connector rotation angle | (in DASY system) | <b>279.8 °</b>         | +/- 3.6 ° (k=2) |
| Sensor angle             | (in DASY system) | <b>-0.49 °</b>         | +/- 0.5 ° (k=2) |
| Sensitivity at 1 kHz     | (in DASY system) | <b>0.00746 V/(A/m)</b> | +/- 2.2 % (k=2) |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **HCT (Dymstec)**

Certificate No: **AM1DV3-3050\_Nov20**

| CALIBRATION CERTIFICATE   |  | 검                                 | 담당자                   | 파인자          |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
|---|--|-----------------------------------|-----------------------|--------------|-------------------|------|----------------------------|-----------------------|-------------------------------|-------------|-----------------------|--------|------------------------|----------|-----------------------------------|--------|------|---------|--------------------------------|--------|---------------------|------|-----------------------|-----------------|------|----------|-----------------------------------|--------|---------------------------------|----------|-----------------------------------|--------|
| Object  | AM1DV3 - SN: 3050  | 제                                 | 76                    | 76           |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
| Calibration procedure(s)  | QA CAL-24.v4<br>Calibration procedure for AM1D magnetic field probes and TMFS in the audio range | 40/20                             | 52 / 12.09            | 67 / 12.09   |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
| Calibration date:   | November 27, 2020  | 일                                 | 2020 / 12.09          | 2020 / 12.09 |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
| <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).<br/>The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Kelthley Multimeter Type 2001</td> <td>SN: 0810278</td> <td>07-Sep-20 (No. 28647)</td> <td>Sep-21</td> </tr> <tr> <td>Reference Probe AM1DV2</td> <td>SN: 1008</td> <td>10-Dec-19 (No. AM1DV2-1008_Dec19)</td> <td>Dec-20</td> </tr> <tr> <td>DAE4</td> <td>SN: 781</td> <td>27-Dec-19 (No. DAE4-781_Dec19)</td> <td>Dec-20</td> </tr> </tbody> </table><br><table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>AMCC</td> <td>SN: 1050</td> <td>01-Oct-13 (in house check Oct-20)</td> <td>Oct-23</td> </tr> <tr> <td>AMMI Audio Measuring Instrument</td> <td>SN: 1062</td> <td>26-Sep-12 (in house check Oct-20)</td> <td>Oct-23</td> </tr> </tbody> </table> |  |                                   |                       |              | Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration | Kelthley Multimeter Type 2001 | SN: 0810278 | 07-Sep-20 (No. 28647) | Sep-21 | Reference Probe AM1DV2 | SN: 1008 | 10-Dec-19 (No. AM1DV2-1008_Dec19) | Dec-20 | DAE4 | SN: 781 | 27-Dec-19 (No. DAE4-781_Dec19) | Dec-20 | Secondary Standards | ID # | Check Date (in house) | Scheduled Check | AMCC | SN: 1050 | 01-Oct-13 (in house check Oct-20) | Oct-23 | AMMI Audio Measuring Instrument | SN: 1062 | 26-Sep-12 (in house check Oct-20) | Oct-23 |
| Primary Standards   | ID #   | Cal Date (Certificate No.)        | Scheduled Calibration |              |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
| Kelthley Multimeter Type 2001   | SN: 0810278  | 07-Sep-20 (No. 28647)             | Sep-21                |              |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
| Reference Probe AM1DV2  | SN: 1008   | 10-Dec-19 (No. AM1DV2-1008_Dec19) | Dec-20                |              |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
| DAE4  | SN: 781  | 27-Dec-19 (No. DAE4-781_Dec19)    | Dec-20                |              |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
| Secondary Standards   | ID #   | Check Date (in house)             | Scheduled Check       |              |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
| AMCC  | SN: 1050   | 01-Oct-13 (in house check Oct-20) | Oct-23                |              |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
| AMMI Audio Measuring Instrument   | SN: 1062   | 26-Sep-12 (in house check Oct-20) | Oct-23                |              |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
| Calibrated by:  | Name<br>Jeton Kastrioti  | Function<br>Laboratory Technician | Signature<br>         |              |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
| Approved by:  | Name<br>Katja Pekoivic   | Function<br>Technical Manager     | Signature<br>         |              |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
| Issued: November 26, 2020   |  |                                   |                       |              |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.   |  |                                   |                       |              |                   |      |                            |                       |                               |             |                       |        |                        |          |                                   |        |      |         |                                |        |                     |      |                       |                 |      |          |                                   |        |                                 |          |                                   |        |

## References

- [1] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2011  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [3] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

## Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1+2]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1+2] without additional shielding.

## Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

## Methods Applied and Interpretation of Parameters

- *Coordinate System:* The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [3], with the tip pointing to "southwest" orientation.
- *Functional Test:* The functional test preceding calibration includes test of Noise level RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected. Frequency response verification from 100 Hz to 10 kHz.
- *Connector Rotation:* The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- *Sensor Angle:* The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.
- *Sensitivity:* With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.

**AM1D probe identification and configuration data**

|           |   |
|-----------|---|
| Item      | <b>AM1DV3</b> Audio Magnetic 1D Field Probe |
| Type No   | SP AM1 001 BA                               |
| Serial No | <b>3050</b>                                 |

|                    |                                    |
|--------------------|------------------------------------|
| Overall length     | 296 mm                             |
| Tip diameter       | 6.0 mm (at the tip)                |
| Sensor offset      | 3.0 mm (centre of sensor from tip) |
| Internal Amplifier | 20 dB                              |

|                       |  |
|-----------------------|--|
| Manufacturer / Origin | Schmid & Partner Engineering AG, Zurich, Switzerland |
|-----------------------|--|

**Calibration data**

|                          |                  |                        |                 |
|--------------------------|------------------|------------------------|-----------------|
| Connector rotation angle | (in DASY system) | <b>212.4 °</b>         | +/- 3.6 ° (k=2) |
| Sensor angle             | (in DASY system) | <b>0.11 °</b>          | +/- 0.5 ° (k=2) |
| Sensitivity at 1 kHz     | (in DASY system) | <b>0.00752 V/(A/m)</b> | +/- 2.2 % (k=2) |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.