

FCC 2G3G REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
May 20, 2022

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2205-FC019-R2

FCC ID: A3LSMG990U2

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-G990U2
 Additional Model(s): SM-G990U3/DS
 EUT Type: Mobile Phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §22, §24, §27, §2, §90

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	248KGXW	0.745	28.72
GSM850 EDGE			252KG7W	0.201	23.04
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M18F9W	0.115	20.59
CDMA Secondary800	817.9 – 823.1	862.9 – 868.1	1M28F9W	0.103	20.12
CDMA 850	824.70– 848.31	869.70– 893.31	1M28F9W	0.099	19.97
Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	250KGXW	0.733	28.65
GSM1900 EDGE			251KG7W	0.223	23.48
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M16F9W	0.210	23.23
WCDMA1700	1712.4 – 1752.6	2112.4 – 2152.6	4M17F9W	0.259	24.13
CDMA PCS	1851.25– 1 908.75	1 931.25– 1 988.75	1M27F9W	0.233	23.68
Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
CDMA Secondary800	817.9 – 823.1	862.9 – 868.1	1M28F9W	0.267	24.26

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report No.: HCT-RF-2205-FC019-R2

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2205-FC019	May 13, 2022	- First Approval Report
HCT-RF-2205-FC019-R1	May 19, 2022	- Revised the Section 3.1. (Page 7.) - Revised the Section 3.11. (Page 18.)
HCT-RF-2205-FC019-R2	May 20, 2022	- Revised the Section 8.1. (Page 25. Power Added test.)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 CONDUCTED OUTPUT POWER	8
3.3 RADIATED POWER.....	9
3.4 RADIATED SPURIOUS EMISSIONS	10
3.5 PEAK- TO- AVERAGE RATIO.....	11
3.6 OCCUPIED BANDWIDTH.	13
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	14
3.8 BAND EDGE	15
3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.10 WORST CASE(CONDUCTED TEST)	17
3.11 WORST CASE(RADIATED TEST)	18
4. LIST OF TEST EQUIPMENT	20
5. MEASUREMENT UNCERTAINTY	21
6. SUMMARY OF TEST RESULTS	22
7. SAMPLE CALCULATION	23
8. TEST DATA	25
8.1 CONDUCTED OUTPUT POWER	25
8.2 EFFECTIVE RADIATED POWER.....	26
8.3 EQUIVALENT ISOTROPIC RADIATED POWER.....	27
8.4 RADIATED SPURIOUS EMISSIONS	28
8.5 PEAK-TO-AVERAGE RATIO.....	36
8.6 OCCUPIED BANDWIDTH	37
8.7 CONDUCTED SPURIOUS EMISSIONS	39
8.8 BAND EDGE	40
8.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	41
9. TEST PLOTS.....	57
10. ANNEX A_ TEST SETUP PHOTO.....	162

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG990U2
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§22, §24, §27, §2, §90
EUT Type:	Mobile Phone
Model(s):	SM-G990U2
Additional Model(s):	SM-G990U3/DS
Tx Frequency:	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900) 1 852.4 - 1 907.6 MHz (WCDMA1900) 1 712.4 - 1 752.6 MHz (WCDMA1700) 824.70 - 848.31 MHz (CDMA BC0) 1 851.25 - 1 908.75 MHz (PCS CDMA BC1) 817.90 - 823.10 MHz (Secondary CDMA BC10)
Rx Frequency:	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900) 1 932.4 - 1 987.6 MHz (WCDMA1900) 2 112.4 - 2 152.6 MHz (WCDMA1700) 869.70 - 893.31 MHz (CDMA BC0) 1 931.25 - 1 988.75 MHz (PCS CDMA BC1) 862.90 - 868.10 MHz (Secondary CDMA BC10)
Date(s) of Tests:	April 05, 2022 ~ May 02, 2022
Serial number:	Radiated: R3CT30Q0QPV Conducted: R3CT30Q0S3A (CDMA BC0), R3CT30Q0SAV

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS, CDMA(BC0, 1, 10) and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80), Bluetooth, BT LE, NFC, AIT, WPT, mmWave(n260/261).

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 – Section 5.2.4 - ANSI C63.26-2015 – Section 5.2.1 & 5.2.4.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 CONDUCTED OUTPUT POWER

Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

Test setup

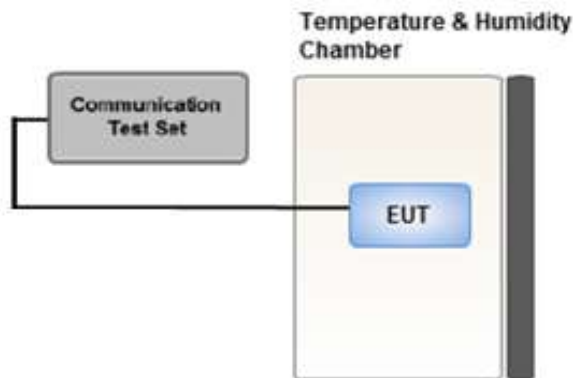

3.3 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.4 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test dat
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.5 PEAK- TO- AVERAGE RATIO

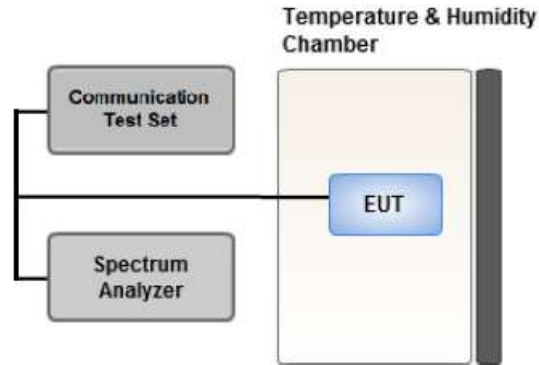

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \times \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \times \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25%.

3.6 OCCUPIED BANDWIDTH.

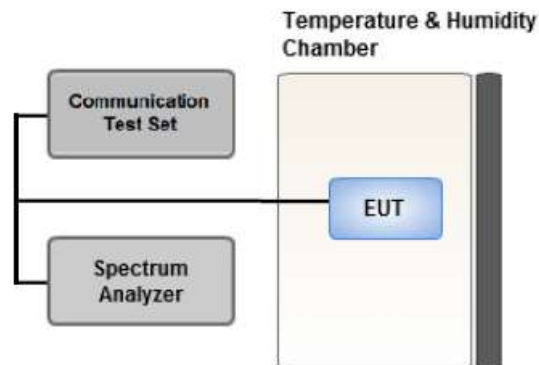

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

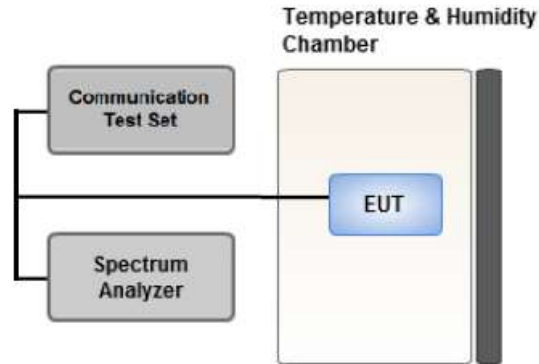

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings(GSM)

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.8 BAND EDGE

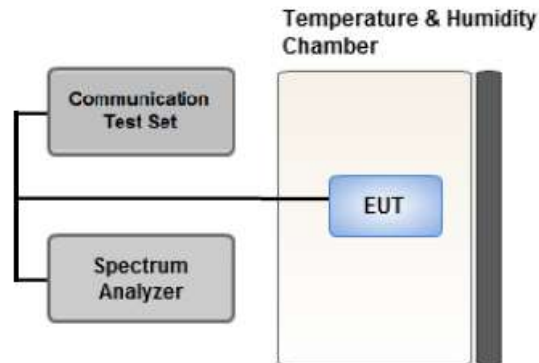

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \times \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

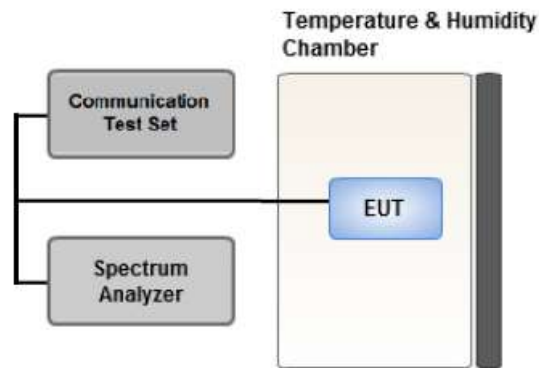

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20°C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- SM-G990U2 & additional models were tested and the worst case results are reported.

(Worst case : SM-G990U2)

[Worst case]

Test Description	Modulation	Test Channel
Occupied Bandwidth	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC) CDMA : RC3/SO55	Low, Mid, High
Band Edge	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC) CDMA : RC3/SO55	Low, High
Spurious and Harmonic Emissions at Antenna Terminal	GSM : Voice WCDMA : QPSK(RMC) CDMA : RC3/SO55	Low, Mid, High

[Test Channel]

	UplinkChannel							
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)	CDMA (BC 0)	CDMA (BC 1)	CDMA (BC 10)
Low	128	512	9262	1312	4132	1013	25	476
Mid	190	661	9400	1412	4183	384	600	580
High	251	810	9538	1513	4233	777	1175	684

3.11 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
Mode : Stand alone, Simultaneous transmission scenarios
Worst case : Stand alone
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- SM-G990U2 & additional models were tested and the worst case results are reported.
(Worst case : SM-G990U2)

[Worst case_3G]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : X WCDMA B4 : Z WCDMA B5 : Y	Low, Mid, High
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Z WCDMA B4 : Z WCDMA B5 : X	Low, Mid, High

[Worst case_2G]

Test Description	Mod	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	Voice	GSM850 : Y GSM1900 : X	Low, Mid, High
	EDGE(1 TX Slot)	GSM850 : Y GSM1900 : X	GSM 850 : Low GSM1900 : Low
Radiated Spurious and Harmonic Emissions	Voice	GSM850 : X GSM1900 : Y	Low, Mid, High

[Worst case_CDMA]

Test Description	Modulation	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	RC3/SO55	CDMA BC0 : X CDMA BC1 : X CDMA BC10 : Y	Low, Mid, High
Radiated Spurious and Harmonic Emissions	RC3/SO55	CDMA BC0 : X CDMA BC1 : Z CDMA BC10 : X	Low, Mid, High

[Test Channel]

	UplinkChannel								
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)	CDMA (BC 0)	CDMA (BC 1)	CDMA (BC 10)	
Low	128	512	9262	1312	4132	1013	25	476	
Mid	190	661	9400	1412	4183	384	600	580	
High	251	810	9538	1513	4233	777	1175	684	

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6200863156	12/29/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a), §24.238(a), §27.53(h), §90.691	< 43 + 10 x log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046, §90.635	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d), §27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, §90.213, § 22.355	< 2.5 ppm	PASS
	§24.235, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Equivalent Isotropic Radiated Power	§24.232(c), §27.50(d)(4)	< 2 Watts max. EIRP < 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a), §27.53(h), §90.691	< 43 + 10 x log ₁₀ (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 CONDUCTED OUTPUT POWER

Channel	SO2	SO2	SO55	SO55	TDSO SO32	1xEvDO REV.0	1xEvDO REV.0	1xEvDO REV.A	1xEvDO REV.A
	RC1/1	RC3/3	RC1/1	RC3/3	RC3/3	FTAP	RTAP	FETAP	FETAP
	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)
476	24.26	24.15	24.13	24.18	24.17	23.55	23.61	23.54	23.58
580	24.24	24.14	24.10	24.15	24.19	23.58	23.59	23.56	23.55
684	24.23	24.16	24.21	24.19	24.15	23.57	23.57	23.58	23.53

8.2 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)							W	W
GSM850	128	824.2	-22.57	40.35	-10.25	1.39	V	< 7.00	0.745	28.72
	190	836.6	-23.54	39.50	-10.19	1.41	V		0.617	27.90
	251	848.8	-23.97	39.37	-10.14	1.42	V		0.604	27.81
EDGE	128	824.2	-28.74	34.81	-10.38	1.39	V		0.201	23.04

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)							W	W
WCDMA850	4132	826.4	-30.78	32.22	-10.23	1.40	V	< 7.00	0.115	20.59
	4183	836.6	-31.44	31.60	-10.19	1.41	V		0.100	20.00
	4233	846.6	-32.00	31.18	-10.15	1.42	V		0.092	19.61

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)							W	W
CDMA Secondary 800	476	817.9	-31.08	31.67	-10.27	1.39	V	< 100	0.100	20.01
	580	820.5	-31.23	31.66	-10.26	1.39	V		0.100	20.01
	684	823.1	-31.29	31.76	-10.25	1.39	V		0.103	20.12

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)							W	W
CDMA850	1013	824.7	-31.44	31.61	-10.24	1.40	H	< 7.00	0.099	19.97
	384	836.5	-31.54	31.48	-10.20	1.41	H		0.097	19.87
	777	848.3	-32.26	30.90	-10.14	1.42	H		0.086	19.34

8.3 EQUIVALENT ISOTROPIC RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)							W	W
GSM1900	512	1850.2	-13.29	20.36	10.40	2.11	H	< 2.00	0.733	28.65
	661	1880.0	-13.96	20.12	10.40	2.15	H		0.687	28.37
	810	1909.8	-14.14	20.16	10.40	2.15	H		0.693	28.41
EDGE	661	1880.0	-18.46	15.19	10.40	2.11	H		0.223	23.48

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)							W	W
WCDMA1900	9262	1852.4	-18.71	14.94	10.40	2.11	H	< 2.00	0.210	23.23
	9400	1880.0	-19.35	14.73	10.40	2.15	H		0.199	22.98
	9538	1907.6	-20.08	14.22	10.40	2.15	H		0.176	22.47

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)							W	W
WCDMA1700	1312	1712.4	-17.46	16.14	10.04	2.05	V	< 1.00	0.259	24.13
	1412	1732.4	-18.18	15.30	10.12	2.05	V		0.217	23.37
	1513	1752.6	-18.14	15.37	10.20	2.06	V		0.225	23.51

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)							W	W
CDMA PCS	25	1851.3	-18.80	14.85	10.40	2.11	H	< 2.00	0.206	23.14
	600	1880.0	-18.65	15.43	10.40	2.15	H		0.233	23.68
	1175	1908.8	-19.45	14.85	10.40	2.15	H		0.204	23.10

8.4 RADIATED SPURIOUS EMISSIONS

▣ MODULATION SIGNAL: GSM850

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute Level</u> [dBm]	C.L	Pol.	Result (dBm)	Limit
128 (824.2)	1 648.40	-51.39	9.70	-61.71	1.99	H	-54.00	-13.00
	2 472.60	-36.52	10.46	-41.17	2.47	H	-33.18	-13.00
	3 296.80	-57.74	12.07	-59.22	2.89	H	-50.03	-13.00
	4 121.00	-57.42	12.56	-55.94	3.26	V	-46.64	-13.00
	4 945.20	-59.41	12.70	-53.94	3.59	H	-44.83	-13.00
190 (836.6)	1 673.20	-49.21	9.82	-59.72	2.01	V	-51.91	-13.00
	2 509.80	-37.13	10.70	-41.43	2.50	H	-33.23	-13.00
	3 346.40	-57.75	12.37	-59.41	2.92	H	-49.96	-13.00
	4 183.00	-57.85	12.62	-56.34	3.29	H	-47.01	-13.00
	5 019.60	-58.27	12.56	-52.46	3.60	H	-43.50	-13.00
251 (848.8)	1 697.60	-52.66	10.00	-62.75	2.04	H	-54.79	-13.00
	2 546.40	-38.13	10.70	-42.04	2.52	H	-33.86	-13.00
	3 395.20	-57.60	12.58	-59.35	2.94	V	-49.71	-13.00
	4 244.00	-58.21	12.79	-56.09	3.31	H	-46.61	-13.00
	5 092.80	-58.55	12.26	-51.52	3.66	V	-42.92	-13.00

▣ MODULATION SIGNAL: GSM1900

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level [dBm]</u>	Ant. Gain (dBi)	<u>Substitute Level [dBm]</u>	C.L	Pol.	Result (dBm)	Limit
512 (1850.2)	3 700.40	-54.78	12.30	-59.37	3.08	H	-50.15	-13.00
	5 550.60	-56.01	13.00	-54.02	3.81	V	-44.83	-13.00
	7 400.80	-55.96	10.80	-45.71	4.44	H	-39.35	-13.00
	9 251.00	-57.81	10.50	-41.59	5.06	H	-36.15	-13.00
	11 101.20	-58.64	11.10	-39.92	5.62	V	-34.44	-13.00
661 (1880.0)	3 760.00	-53.05	12.32	-57.37	3.10	V	-48.15	-13.00
	5 640.00	-55.39	13.10	-53.20	3.85	H	-43.95	-13.00
	7 520.00	-56.68	10.84	-45.83	4.46	H	-39.45	-13.00
	9 400.00	-58.67	10.50	-42.27	5.07	H	-36.84	-13.00
	11 280.00	-58.26	11.24	-39.57	5.70	H	-34.03	-13.00
810 (1909.8)	3 819.60	-52.58	12.40	-57.27	3.14	H	-48.01	-13.00
	5 729.40	-56.37	13.04	-55.54	3.69	H	-46.19	-13.00
	7 639.20	-57.25	11.26	-46.54	4.47	V	-39.75	-13.00
	9 549.00	-57.95	11.00	-41.99	5.15	V	-36.14	-13.00
	11 458.80	-59.59	10.90	-38.53	5.74	H	-33.37	-13.00

▣ MODULATION SIGNAL: WCDMA850

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
4,132 (826.4)	1 652.80	-52.30	9.70	-62.62	1.99	V	-54.91	-13.00
	2 479.20	-51.50	10.54	-56.28	2.48	H	-48.22	-13.00
	3 305.60	-57.60	12.13	-59.02	2.90	V	-49.78	-13.00
	4 132.00	-57.79	12.54	-56.40	3.27	H	-47.13	-13.00
	4 958.40	-58.25	12.68	-52.97	3.60	H	-43.89	-13.00
4,183 (836.6)	1 673.20	-51.61	9.82	-62.12	2.01	H	-54.31	-13.00
	2 509.80	-52.32	10.70	-56.62	2.50	H	-48.42	-13.00
	3 346.40	-57.84	12.37	-59.50	2.92	V	-50.05	-13.00
	4 183.00	-57.38	3.29	-46.54	3.29	V	-46.54	-13.00
	5 019.60	-57.96	12.56	-52.15	3.60	V	-43.19	-13.00
4,233 (846.6)	1 693.20	-51.97	9.94	-62.38	2.03	H	-54.47	-13.00
	2 539.80	-52.77	10.70	-56.85	2.51	V	-48.66	-13.00
	3 386.40	-56.22	12.54	-57.89	2.94	V	-48.28	-13.00
	4 233.00	-57.83	12.76	-55.72	3.31	V	-46.27	-13.00
	5 079.60	-58.68	12.32	-52.19	3.66	V	-43.53	-13.00

▣ MODULATION SIGNAL: WCDMA1900

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
9262 (1852.4)	3 704.80	-54.22	12.30	-58.09	3.80	V	-49.59	-13.00
	5 557.20	-55.29	13.20	-53.50	3.82	H	-44.12	-13.00
	7 409.60	-55.85	10.80	-45.36	4.45	V	-39.01	-13.00
	9 262.00	-57.20	10.48	-41.05	5.05	V	-35.62	-13.00
	11 114.40	-57.88	11.13	-39.28	5.63	H	-33.78	-13.00
9400 (1880.0)	3 760.00	-54.04	12.32	-58.36	3.10	V	-49.14	-13.00
	5 640.00	-54.88	13.10	-52.69	3.85	H	-43.44	-13.00
	7 520.00	-55.81	10.84	-44.96	4.46	V	-38.58	-13.00
	9 400.00	-57.25	10.50	-40.85	5.07	H	-35.42	-13.00
	11 280.00	-56.75	11.24	-38.06	5.70	V	-32.52	-13.00
9538 (1907.6)	3 815.20	-54.44	12.40	-59.21	3.14	V	-49.95	-13.00
	5 722.80	-56.27	13.06	-53.24	3.88	H	-44.06	-13.00
	7 630.40	-56.12	11.22	-45.28	4.48	H	-38.54	-13.00
	9 538.00	-57.79	10.96	-42.03	5.12	V	-36.19	-13.00
	11 445.60	-58.25	11.19	-37.76	5.73	H	-32.30	-13.00

▣ MODULATION SIGNAL: WCDMA1700

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level [dBm]</u>	Ant. Gain (dBi)	<u>Substitute Level [dBm]</u>	C.L	Pol.	Result (dBm)	Limit
1312 (1712.4)	3 424.80	-53.21	12.55	-59.89	2.95	V	-50.29	-13.00
	5 137.20	-55.33	12.28	-52.48	3.66	V	-43.86	-13.00
	6 849.60	-55.15	12.00	-48.22	4.25	V	-40.47	-13.00
	8 562.00	-57.50	11.48	-44.76	4.81	V	-38.09	-13.00
	10 274.40	-57.64	11.50	-40.86	5.41	V	-34.76	-13.00
1412 (1732.4)	3 464.80	-53.72	12.47	-60.06	2.97	V	-50.56	-13.00
	5 197.20	-55.75	12.50	-54.30	3.70	H	-45.50	-13.00
	6 929.60	-55.30	11.78	-47.50	4.28	V	-40.00	-13.00
	8 662.00	-57.33	11.16	-43.85	4.85	V	-37.54	-13.00
	10 394.40	-57.69	11.40	-41.29	5.40	H	-35.28	-13.00
1513 (1752.6)	3 505.20	-54.02	12.40	-60.18	2.98	V	-50.76	-13.00
	5 257.80	-55.56	12.84	-54.62	3.71	H	-45.49	-13.00
	7 010.40	-55.39	11.34	-46.91	4.32	V	-39.89	-13.00
	8 763.00	-57.38	10.90	-42.94	4.87	H	-36.91	-13.00
	10 515.60	-56.90	11.20	-39.21	5.44	H	-33.45	-13.00

▣ MODULATION SIGNAL: CDMA Secondary800

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level [dBm]</u>	Ant. Gain (dBi)	<u>Substitute Level [dBm]</u>	C.L	Pol.	Result (dBm)	Limit
476 (817.9)	1 635.80	-52.57	9.55	-62.74	1.98	V	-55.17	-13.00
	2 453.70	-50.07	10.30	-54.46	2.46	H	-46.62	-13.00
	3 271.60	-57.35	11.92	-58.79	2.88	H	-49.75	-13.00
580 (820.5)	1 641.00	-52.24	9.60	-62.62	1.98	V	-55.00	-13.00
	2 461.50	-48.99	10.38	-53.66	2.46	H	-45.74	-13.00
	3 282.00	-57.45	11.98	-59.18	2.88	V	-50.08	-13.00
684 (823.1)	1 646.20	-52.01	9.65	-62.36	1.99	V	-54.69	-13.00
	2 469.30	-50.45	10.46	-55.10	2.47	H	-47.11	-13.00
	3 292.40	-56.38	12.04	-57.78	2.88	H	-48.62	-13.00

▣ MODULATION SIGNAL: CDMA850

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute Level</u> [dBm]	C.L	Pol.	Result (dBm)	Limit
1013 (824.7)	1 649.40	-48.69	9.70	-59.01	1.99	H	-51.30	-13.00
	2 474.10	-49.77	10.50	-54.48	2.48	V	-46.46	-13.00
	3 298.80	-53.20	12.10	-54.76	2.89	V	-45.55	-13.00
384 (836.5)	1 673.00	-47.95	9.82	-58.46	2.01	V	-50.65	-13.00
	2 509.50	-50.04	10.70	-54.34	2.50	H	-46.14	-13.00
	3 346.00	-53.23	12.37	-54.89	2.92	H	-45.44	-13.00
777 (848.3)	1 696.60	-48.35	9.97	-58.60	2.04	V	-50.66	-13.00
	2 544.90	-50.97	10.70	-54.88	2.52	H	-46.70	-13.00
	3 393.20	-54.08	12.56	-55.49	2.94	H	-45.87	-13.00

▣ MODULATION SIGNAL: CDMA PCS

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
25 (1851.3)	3 702.60	-50.09	12.30	-54.68	3.08	V	-45.46	-13.00
	5 553.90	-51.40	13.00	-49.41	3.81	V	-40.22	-13.00
	7 405.20	-51.62	10.80	-41.25	4.45	H	-34.89	-13.00
600 (1880.0)	3 760.00	-50.13	12.32	-54.45	3.10	V	-45.23	-13.00
	5 640.00	-51.03	13.10	-48.84	3.85	H	-39.59	-13.00
	7 520.00	-52.12	10.84	-41.27	4.46	H	-34.89	-13.00
1175 (1908.8)	3 817.60	-49.39	12.40	-54.08	3.14	H	-44.82	-13.00
	5 726.40	-50.24	13.05	-47.38	3.88	V	-38.20	-13.00
	7 635.20	-52.00	11.24	-41.22	4.48	H	-34.46	-13.00

8.5 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{PK} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{PK} - P _{Avg} (dB)	Limit (dB)	Pass / Fail
				Tx _{Total} (ms)	Tx _{On} (ms)	Factor (dB)			
GSM1900	661	30.106	20.32	4.616	0.5475	9.26	0.53	13	Pass
GSM1900 EDGE	661	28.295	15.48	4.616	0.5475	9.26	3.56		
WCDMA1900	9400	CCDF Procedure					2.89		
WCDMA1700	1412						2.90		
CDMA PCS	600						4.28		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 78 ~ 86.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$$P.A.R.(dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \text{ (} P_{Avg} = \text{Average Power} + \text{Duty cycle Factor)}$$

$$\text{Duty cycle Factor} = 10 \times \log (1/X), X = Tx_{On} / Tx_{Total}$$

8.6 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	244.59
	190	836.60	246.07
	251	848.80	247.92
GSM850 EDGE	128	824.20	251.38
	190	836.60	240.43
	251	848.80	251.65
GSM1900	512	1,850.20	242.11
	661	1,880.00	249.62
	810	1,909.80	241.75
GSM1900 EDGE	512	1,850.20	243.45
	661	1,880.00	243.35
	810	1,909.80	250.94
WCDMA850	4132	826.40	4.1753
	4183	836.60	4.1460
	4233	846.60	4.1692
WCDMA1900	9262	1852.40	4.1503
	9400	1880.00	4.1537
	9538	1907.60	4.1640
WCDMA1700	1312	1712.40	4.1606
	1412	1732.40	4.1495
	1513	1752.60	4.1671

Band	Channel	Frequency(MHz)	Data (CDMA : MHz)
CDMA Secondary800	476	817.9	1.2780
	580	820.5	1.2777
	684	823.1	1.2751
CDMA850	1013	824.7	1.2771
	384	836.5	1.2718
	777	848.3	1.2771
CDMA PCS	25	1851.3	1.2741
	600	1880.0	1.2699
	1175	1908.8	1.2693

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 58 ~ 77.

8.7 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	(dBm)
GSM850	128	3.7084	27.976	-57.242	-29.266	-13.00
	190	3.2149	27.976	-57.222	-29.246	
	251	7.2553	28.591	-57.725	-29.134	
GSM1900	512	18.8945	29.489	-52.453	-22.964	
	661	18.9020	29.489	-52.865	-23.376	
	810	18.8402	29.489	-52.432	-22.943	
WCDMA850	4132	2.4766	27.976	-75.720	-47.744	
	4183	2.5075	27.976	-76.306	-48.330	
	4233	2.5429	27.976	-76.210	-48.234	
WCDMA1900	9262	18.9105	29.489	-72.446	-42.957	
	9400	18.9285	29.489	-72.494	-43.005	
	9538	18.9167	29.489	-72.544	-43.055	
WCDMA1700	1312	1.7877	27.976	-71.918	-43.942	
	1412	18.9447	29.489	-72.419	-42.930	
	1513	18.9270	29.489	-72.517	-43.028	
CDMA Secondary800	476	2.4552	27.976	-74.132	-46.156	
	580	2.4627	27.976	-73.226	-45.250	
	684	2.4702	27.976	-73.280	-45.304	
CDMA850	1013	2.4741	27.976	-74.086	-46.110	
	384	2.5110	27.976	-72.364	-44.388	
	777	2.5464	27.976	-72.595	-44.619	
CDMA PCS	25	18.9382	29.489	-72.180	-42.691	
	600	18.9190	29.489	-72.504	-43.015	
	1175	18.9022	29.489	-72.562	-43.073	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 134 ~ 161.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.8 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 87 ~ 133.

8.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: GSM850
- ▣ OPERATING FREQUENCY: 836.600.000 Hz
- ▣ CHANNEL: 190
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 600 020	0.0	0.000 000	0.0000
100 %		-30	836 600 030	10.4	0.000 001	0.0124
100 %		-20	836 600 033	13.7	0.000 002	0.0164
100 %		-10	836 600 031	10.8	0.000 001	0.0129
100 %		0	836 600 033	13.3	0.000 002	0.0159
100 %		+10	836 600 033	13.3	0.000 002	0.0159
100 %		+30	836 600 034	14.7	0.000 002	0.0175
100 %		+40	836 600 035	15.0	0.000 002	0.0180
100 %		+50	836 600 026	5.8	0.000 001	0.0070
Batt. Endpoint		3.650	+20	836 600 029	9.0	0.000 001

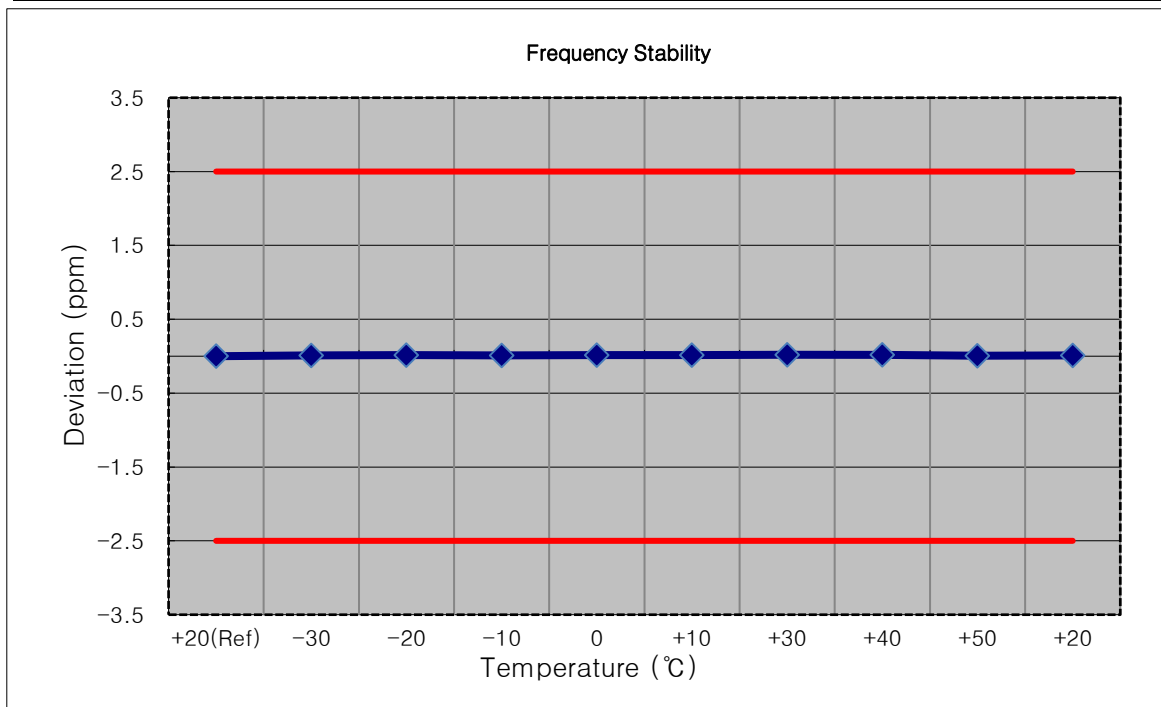


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1850,200,000 Hz
- ▣ CHANNEL: 512
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1850 200 027	0.0	0.000 000	0.0000
100 %		-30	1850 200 053	26.6	0.000 001	0.0144
100 %		-20	1850 200 038	11.0	0.000 001	0.0060
100 %		-10	1850 200 041	14.0	0.000 001	0.0076
100 %		0	1850 200 050	23.5	0.000 001	0.0127
100 %		+10	1850 200 047	19.8	0.000 001	0.0107
100 %		+30	1850 200 047	20.0	0.000 001	0.0108
100 %		+40	1850 200 049	22.6	0.000 001	0.0122
100 %		+50	1850 200 050	23.5	0.000 001	0.0127
Batt. Endpoint	3.650	+20	1850 200 053	26.6	0.000 001	0.0144

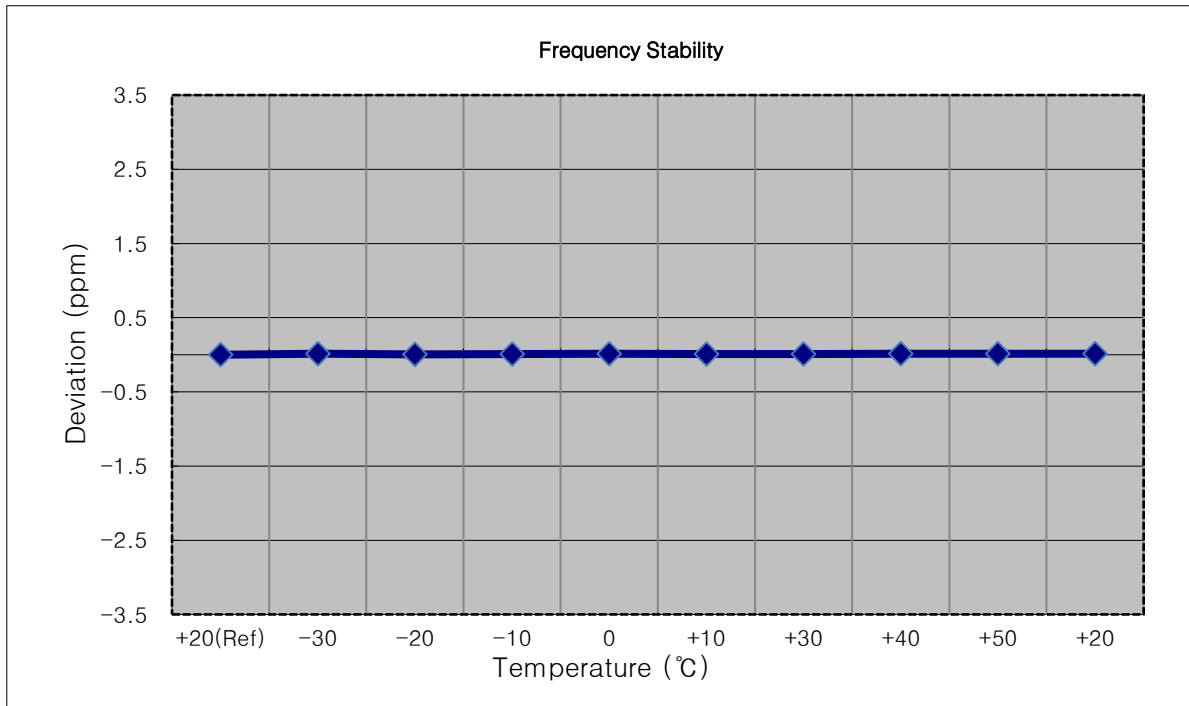


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 661
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 036	0.0	0.000 000	0.000
100 %		-30	1880 000 052	15.9	0.000 001	0.008
100 %		-20	1880 000 053	17.5	0.000 001	0.009
100 %		-10	1880 000 054	18.3	0.000 001	0.010
100 %		0	1880 000 053	17.7	0.000 001	0.009
100 %		+10	1880 000 059	23.3	0.000 001	0.012
100 %		+30	1880 000 064	28.0	0.000 001	0.015
100 %		+40	1880 000 066	30.1	0.000 002	0.016
100 %		+50	1880 000 067	31.5	0.000 002	0.017
Batt. Endpoint	3.650	+20	1880 000 069	32.9	0.000 002	0.018

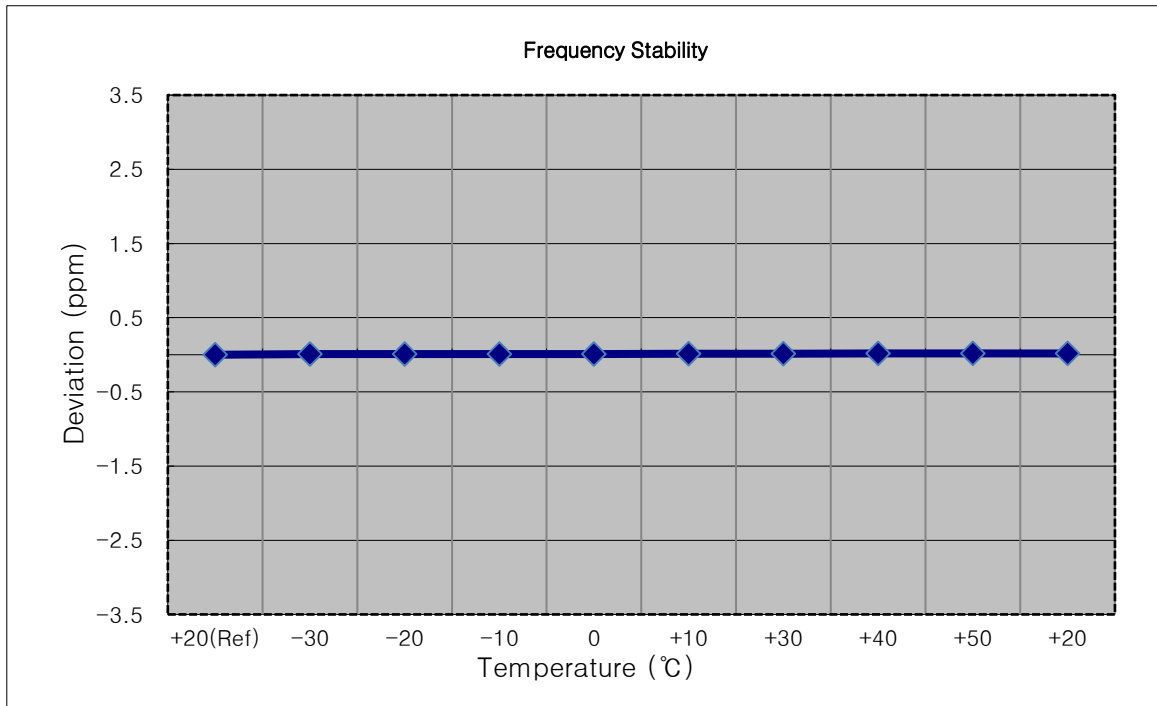


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1909,800,000 Hz
- ▣ CHANNEL: 810
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1909 799 989	0.0	0.000 000	0.000
100 %		-30	1909 800 014	25.1	0.000 001	0.013
100 %		-20	1909 799 979	-10.2	-0.000 001	-0.005
100 %		-10	1909 800 000	11.0	0.000 001	0.006
100 %		0	1909 799 999	10.7	0.000 001	0.006
100 %		+10	1909 799 998	9.5	0.000 000	0.005
100 %		+30	1909 799 979	-10.1	-0.000 001	-0.005
100 %		+40	1909 800 000	11.4	0.000 001	0.006
100 %		+50	1909 799 979	-9.8	-0.000 001	-0.005
Batt. Endpoint		3.650	+20	1909 799 980	-8.4	0.000 000

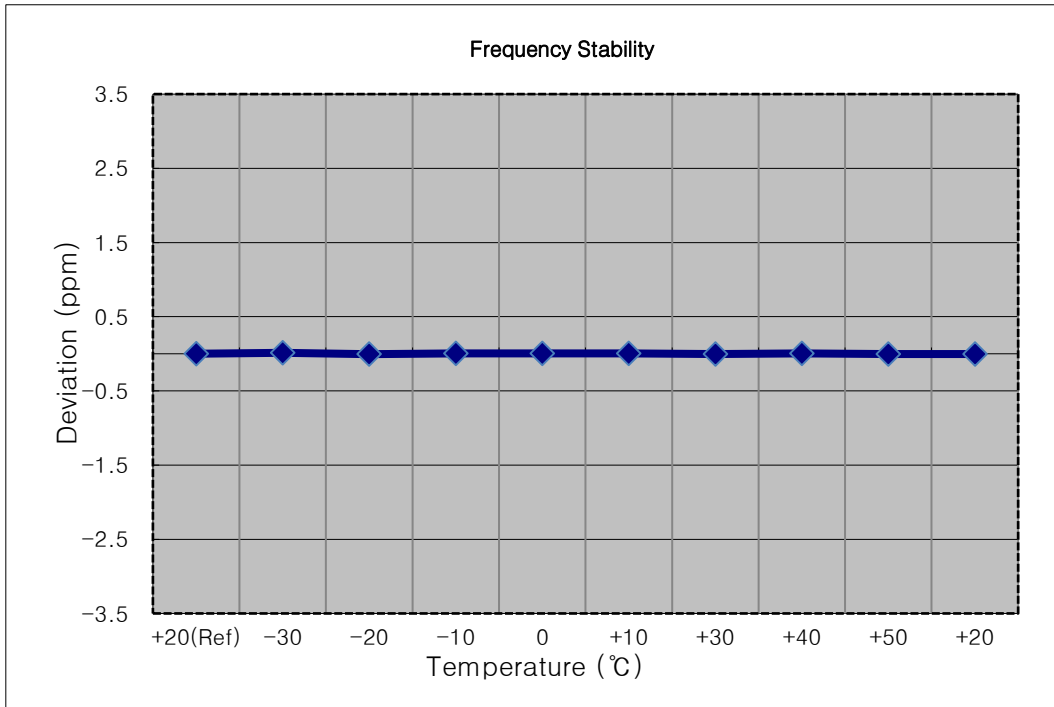


- ▣ Mode: WCDMA850
- ▣ OPERATING FREQUENCY: 836.600.000 Hz
- ▣ CHANNEL: 4183
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 599 997	0.0	0.000 000	0.0000
100 %		-30	836 599 998	0.9	0.000 000	0.0011
100 %		-20	836 599 999	1.6	0.000 000	0.0020
100 %		-10	836 599 999	2.2	0.000 000	0.0027
100 %		0	836 600 000	2.3	0.000 000	0.0027
100 %		+10	836 600 000	2.7	0.000 000	0.0033
100 %		+30	836 599 996	-1.7	0.000 000	-0.0020
100 %		+40	836 600 000	2.4	0.000 000	0.0029
100 %		+50	836 600 000	2.4	0.000 000	0.0028
Batt. Endpoint		3.650	+20	836 600 000	2.4	0.000 000

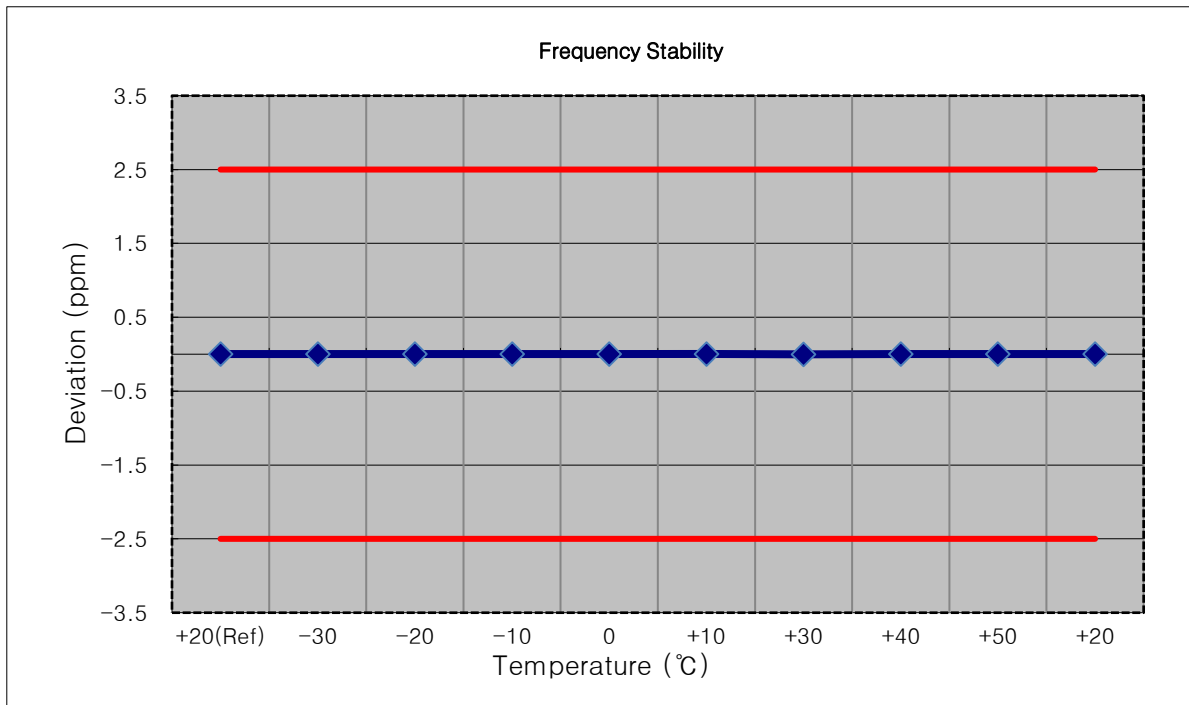


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,852,400,000 Hz
- ▣ CHANNEL: 9262
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1852 400 019	0.0	0.000 000	0.0000
100 %		-30	1852 400 038	19.4	0.000 001	0.0105
100 %		-20	1852 400 037	18.5	0.000 001	0.0100
100 %		-10	1852 400 037	18.5	0.000 001	0.0100
100 %		0	1852 400 037	18.6	0.000 001	0.0100
100 %		+10	1852 400 038	19.0	0.000 001	0.0102
100 %		+30	1852 400 036	17.5	0.000 001	0.0094
100 %		+40	1852 400 038	18.9	0.000 001	0.0102
100 %		+50	1852 400 037	18.1	0.000 001	0.0098
Batt. Endpoint	3.650	+20	1852 400 037	18.3	0.000 001	0.0099

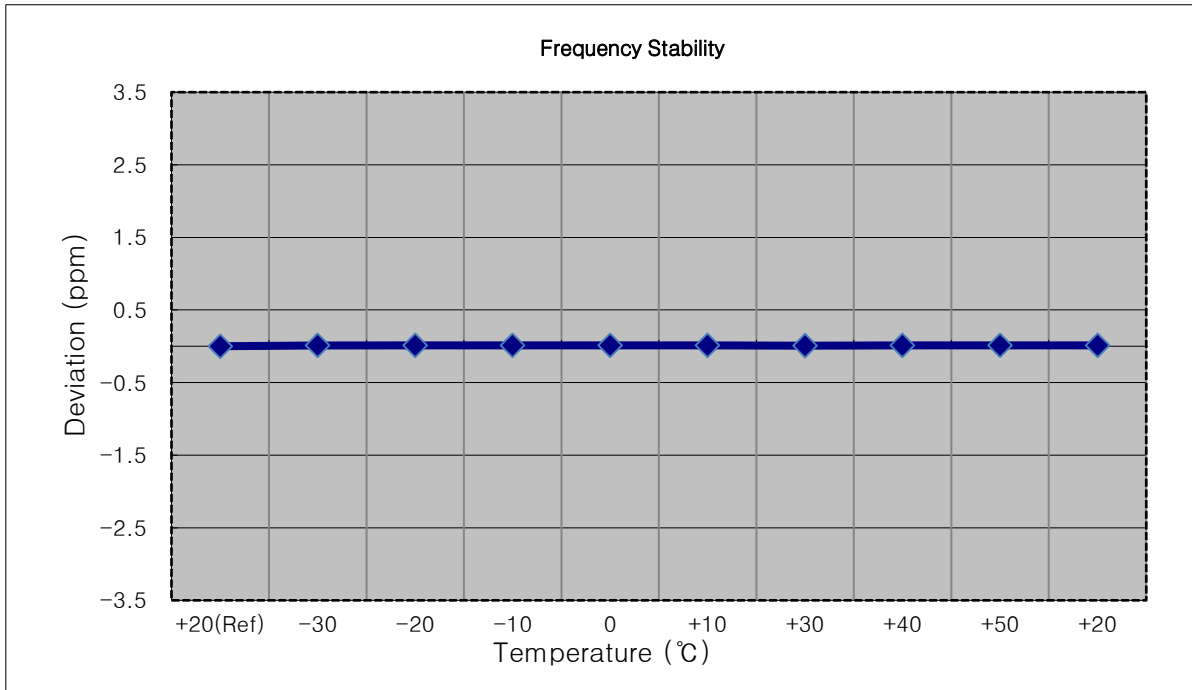


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,880,000,000 Hz
- ▣ CHANNEL: 9400
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 015	0.0	0.000 000	0.0000
100 %		-30	1880 000 030	15.2	0.000 001	0.0081
100 %		-20	1880 000 030	15.3	0.000 001	0.0081
100 %		-10	1880 000 029	14.5	0.000 001	0.0077
100 %		0	1880 000 029	14.6	0.000 001	0.0078
100 %		+10	1880 000 030	15.1	0.000 001	0.0080
100 %		+30	1880 000 030	15.0	0.000 001	0.0080
100 %		+40	1880 000 029	14.7	0.000 001	0.0078
100 %		+50	1880 000 029	14.3	0.000 001	0.0076
Batt. Endpoint		3.650	+20	1880 000 030	15.2	0.000 001

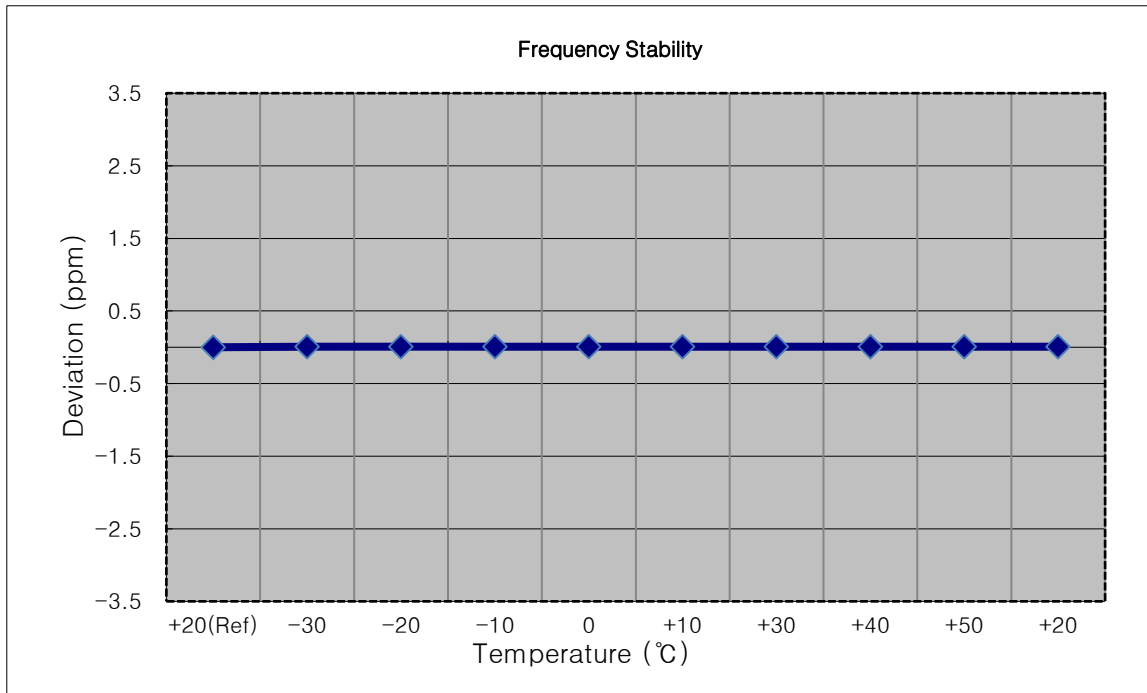


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,907,600,000 Hz
- ▣ CHANNEL: 9538
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1907 600 012	0.0	0.000 000	0.0000
100 %		-30	1907 600 025	13.1	0.000 001	0.0069
100 %		-20	1907 600 024	12.5	0.000 001	0.0065
100 %		-10	1907 600 024	12.0	0.000 001	0.0063
100 %		0	1907 600 022	10.3	0.000 001	0.0054
100 %		+10	1907 600 022	11.0	0.000 001	0.0058
100 %		+30	1907 600 023	11.3	0.000 001	0.0059
100 %		+40	1907 600 022	10.7	0.000 001	0.0056
100 %		+50	1907 600 024	12.0	0.000 001	0.0063
Batt. Endpoint		3.650	+20	1907 600 022	10.7	0.000 001

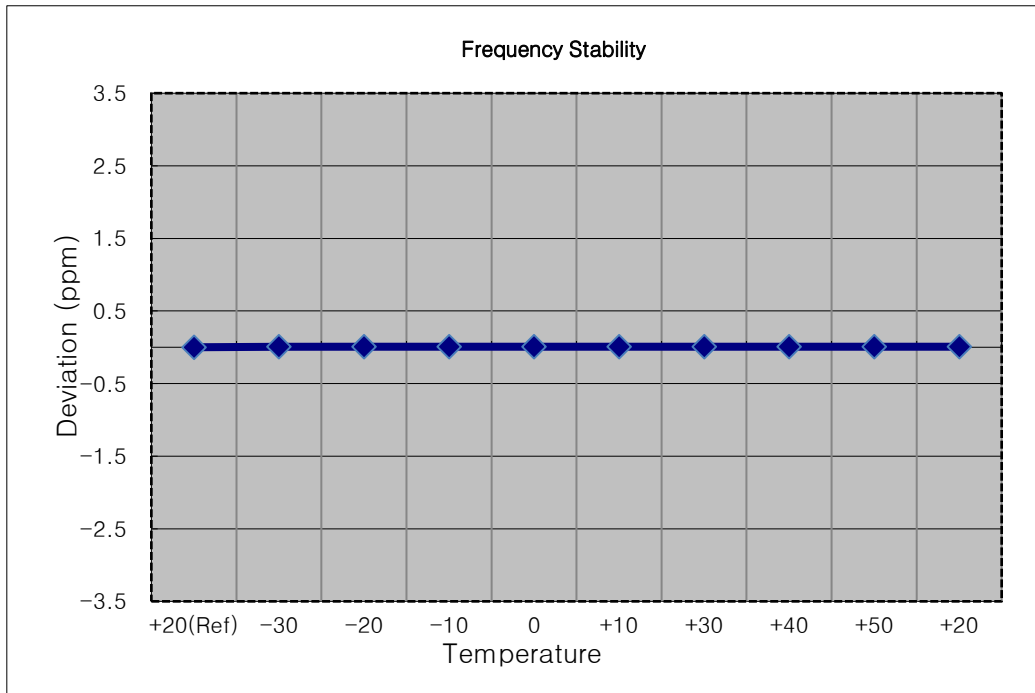


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,712,400,000 Hz
- ▣ CHANNEL: 1312
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1712 400 019	0.0	0.000 000	0.0000
100 %		-30	1712 400 038	18.9	0.000 001	0.0110
100 %		-20	1712 400 037	18.2	0.000 001	0.0106
100 %		-10	1712 400 037	18.5	0.000 001	0.0108
100 %		0	1712 400 038	19.4	0.000 001	0.0113
100 %		+10	1712 400 037	18.7	0.000 001	0.0109
100 %		+30	1712 400 038	19.1	0.000 001	0.0111
100 %		+40	1712 400 038	19.1	0.000 001	0.0111
100 %		+50	1712 400 037	18.0	0.000 001	0.0105
Batt. Endpoint		3.650	+20	1712 400 038	19.2	0.000 001

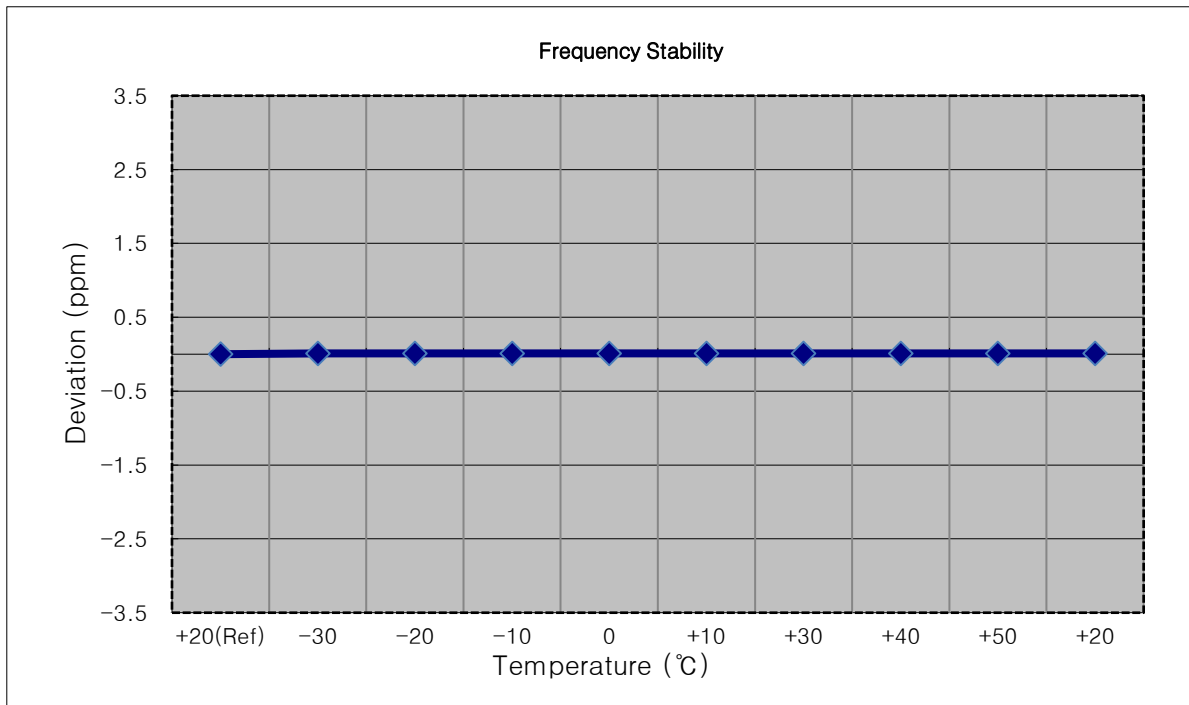


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,732,400,000 Hz
- ▣ CHANNEL: 1412
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 400 010	0.0	0.000 000	0.0000
100 %		-30	1732 400 017	7.6	0.000 000	0.0044
100 %		-20	1732 400 017	7.1	0.000 000	0.0041
100 %		-10	1732 400 017	7.8	0.000 000	0.0045
100 %		0	1732 400 019	9.7	0.000 001	0.0056
100 %		+10	1732 400 017	7.4	0.000 000	0.0043
100 %		+30	1732 400 017	7.9	0.000 000	0.0046
100 %		+40	1732 400 017	7.0	0.000 000	0.0041
100 %		+50	1732 400 016	6.8	0.000 000	0.0039
Batt. Endpoint		3.650	+20	1732 400 019	9.4	0.000 001

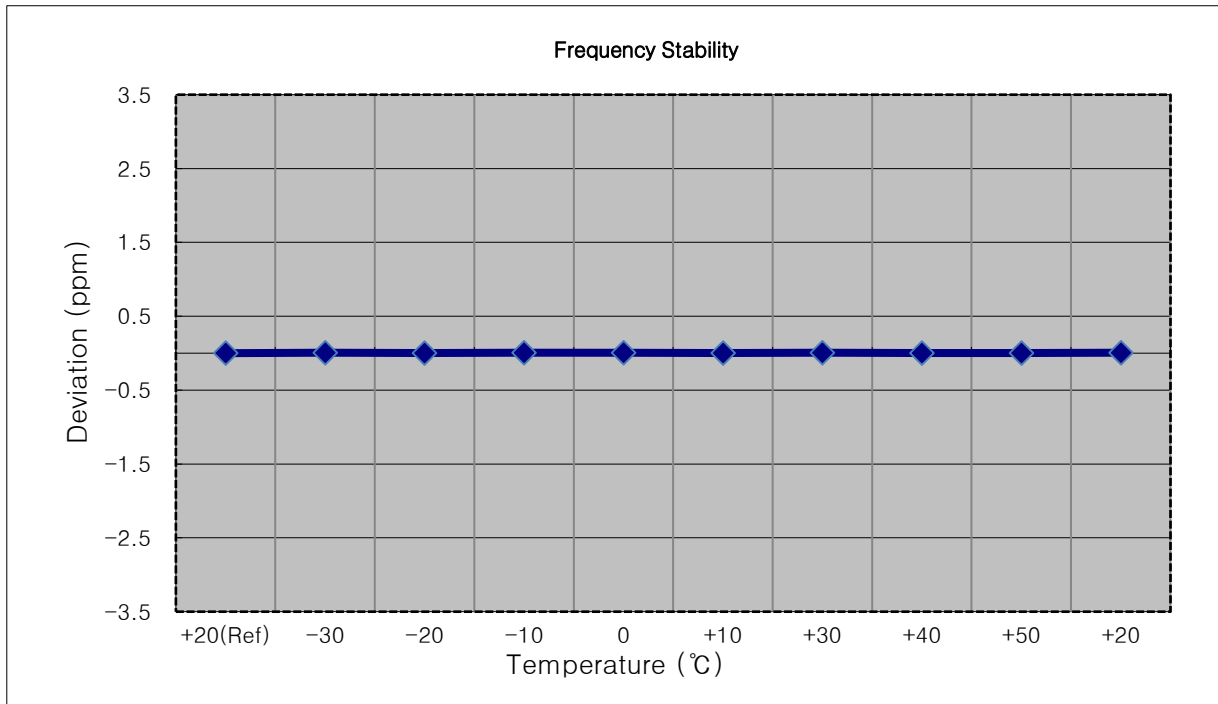


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,752,600,000 Hz
- ▣ CHANNEL: 1513
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1752 599 989	0.0	0.000 000	0.0000
100 %		-30	1752 599 977	-11.4	-0.000 001	-0.0065
100 %		-20	1752 599 978	-10.7	-0.000 001	-0.0061
100 %		-10	1752 599 978	-11.1	-0.000 001	-0.0064
100 %		0	1752 599 978	-10.8	-0.000 001	-0.0062
100 %		+10	1752 599 978	-11.1	-0.000 001	-0.0063
100 %		+30	1752 599 978	-10.5	-0.000 001	-0.0060
100 %		+40	1752 599 976	-12.2	-0.000 001	-0.0070
100 %		+50	1752 599 977	-11.3	-0.000 001	-0.0065
Batt. Endpoint	3.650	+20	1752 599 979	-9.9	-0.000 001	-0.0057

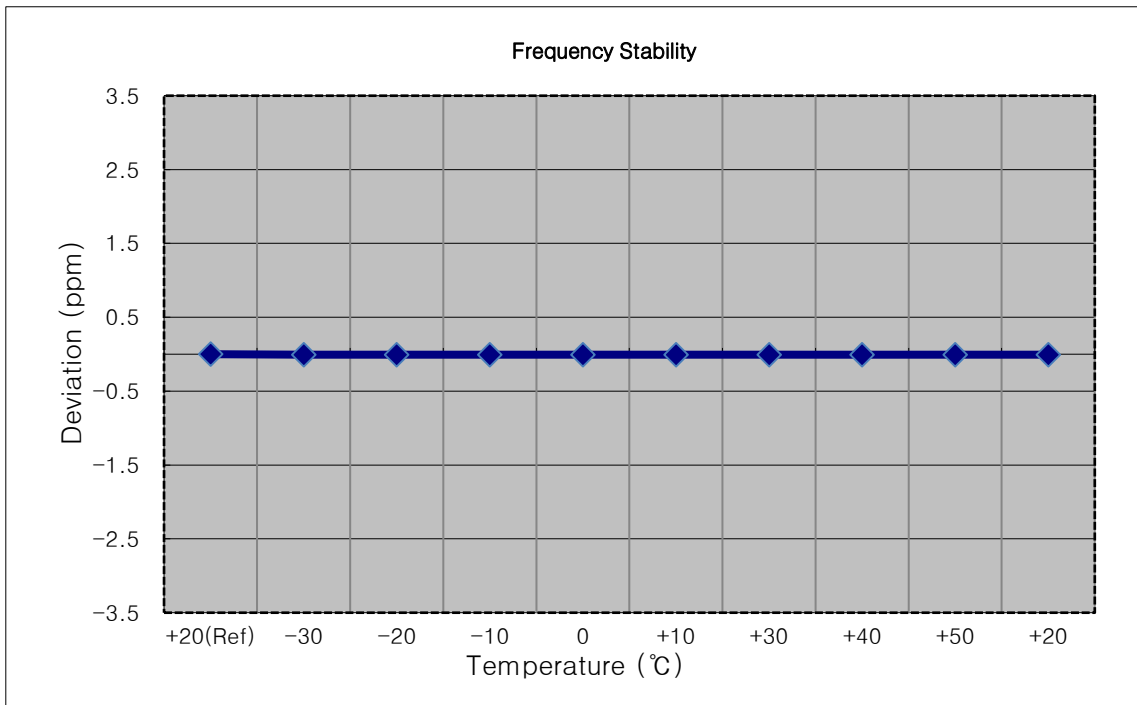


- ▣ Mode: CDMA850
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 384
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 520 015	0.0	0.000 000	0.0000
100 %		-30	836 520 029	13.6	0.000 002	0.0162
100 %		-20	836 520 033	17.4	0.000 002	0.0208
100 %		-10	836 520 025	10.1	0.000 001	0.0120
100 %		0	836 520 008	-7.4	-0.000 001	-0.0089
100 %		+10	836 519 992	-22.8	-0.000 003	-0.0273
100 %		+30	836 520 000	-15.1	-0.000 002	-0.0180
100 %		+40	836 520 000	-14.9	-0.000 002	-0.0178
100 %		+50	836 519 993	-22.6	-0.000 003	-0.0270
Batt. Endpoint		3.650	+20	836 519 999	-16.2	-0.000 002

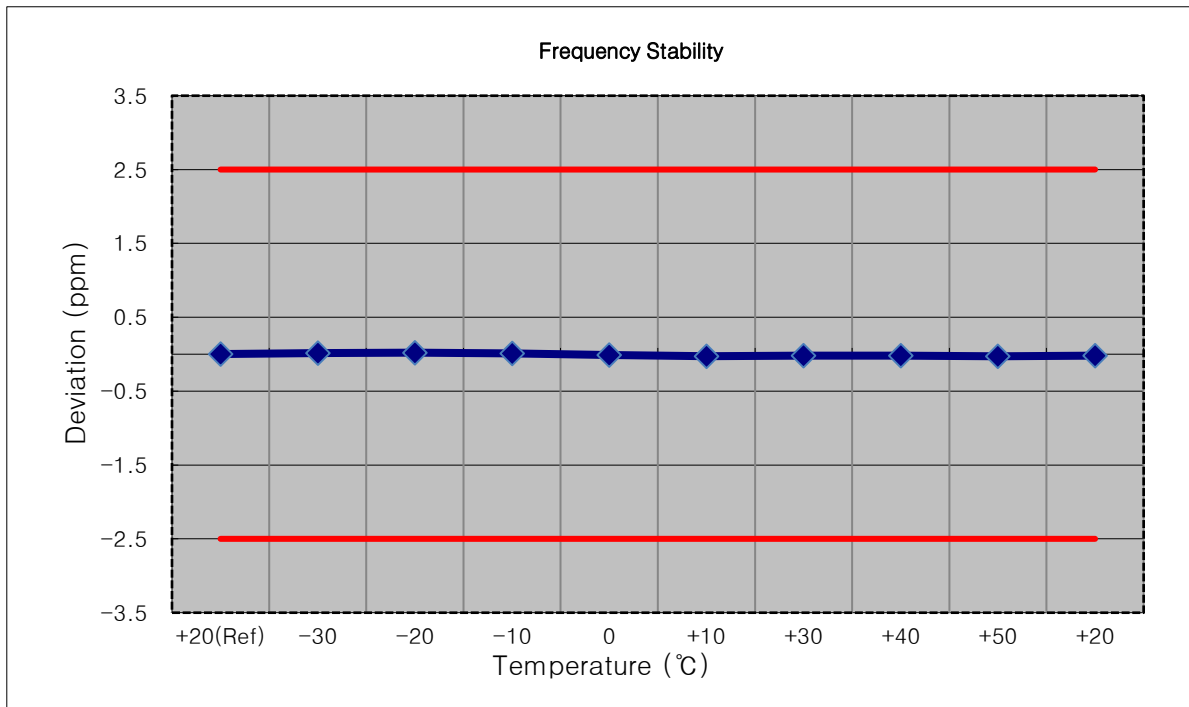


- ▣ Mode: CDMA Secondary800
- ▣ OPERATING FREQUENCY: 820,500,000 Hz
- ▣ CHANNEL: 580
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	820 499 986	0.0	0.000 000	0.0000
100 %		-30	820 499 965	-20.8	-0.000 003	-0.0254
100 %		-20	820 499 968	-18.1	-0.000 002	-0.0221
100 %		-10	820 499 966	-20.5	-0.000 002	-0.0249
100 %		0	820 499 999	12.8	0.000 002	0.0156
100 %		+10	820 499 999	12.6	0.000 002	0.0153
100 %		+30	820 499 999	12.9	0.000 002	0.0157
100 %		+40	820 499 998	12.3	0.000 002	0.0150
100 %		+50	820 500 001	14.6	0.000 002	0.0178
Batt. Endpoint		3.650	+20	820 499 997	10.7	0.000 001

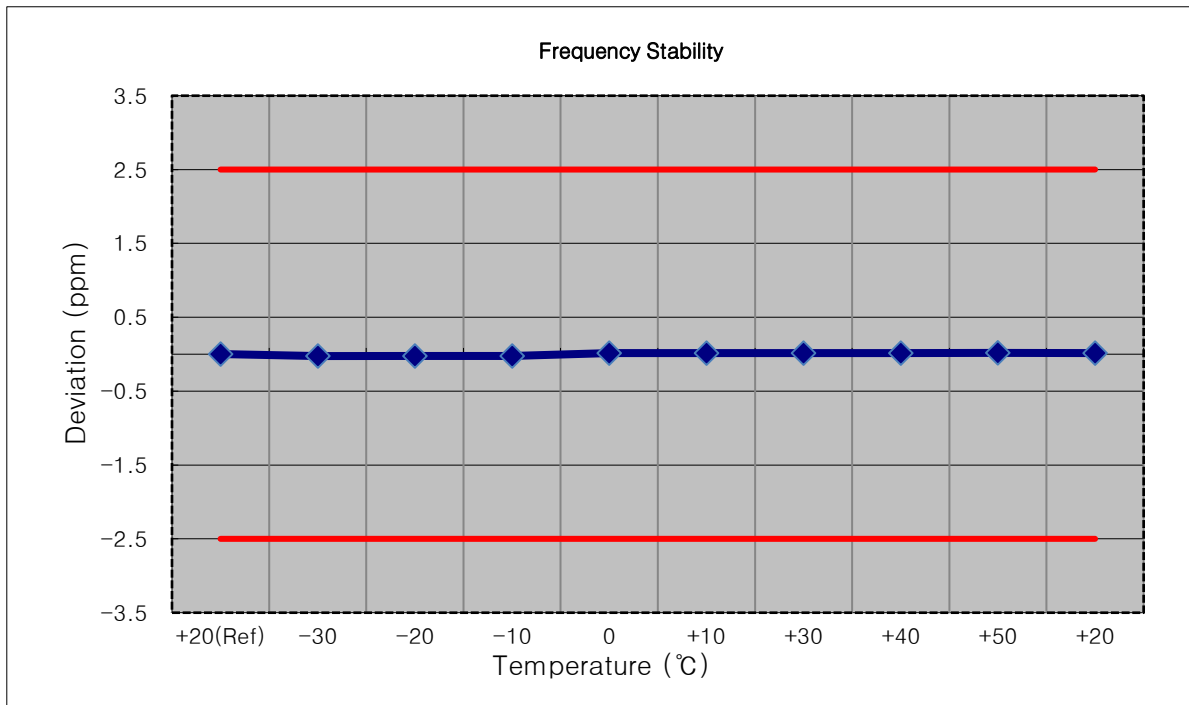


- ▣ Mode: CDMA PCS
- ▣ OPERATING FREQUENCY: 1,851,250,000 Hz
- ▣ CHANNEL: 25
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1851 249 982	0.0	0.000 000	0.0000
100 %		-30	1851 249 961	-21.0	-0.000 001	-0.0113
100 %		-20	1851 249 965	-17.3	-0.000 001	-0.0093
100 %		-10	1851 249 968	-13.4	-0.000 001	-0.0072
100 %		0	1851 249 964	-18.0	-0.000 001	-0.0097
100 %		+10	1851 249 963	-18.4	-0.000 001	-0.0099
100 %		+30	1851 249 965	-16.8	-0.000 001	-0.0091
100 %		+40	1851 249 995	13.5	0.000 001	0.0073
100 %		+50	1851 249 970	-12.0	-0.000 001	-0.0065
Batt. Endpoint		3.650	+20	1851 249 961	-20.4	-0.000 001

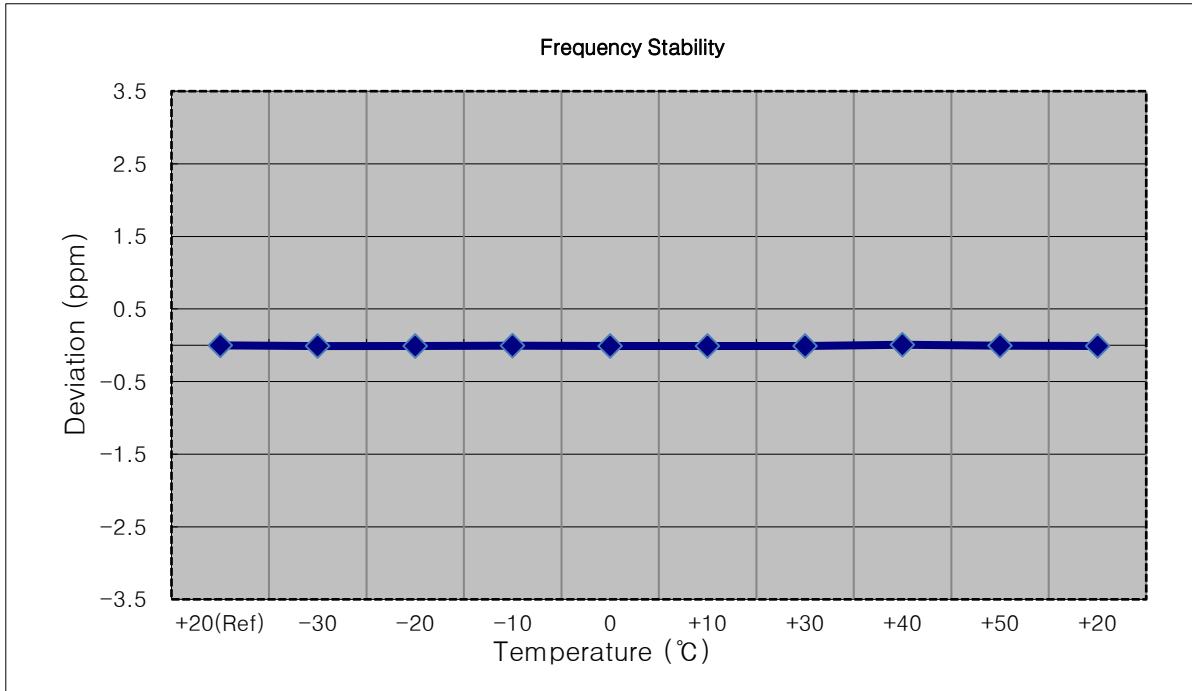


- ▣ Mode: CDMA PCS
- ▣ OPERATING FREQUENCY: 1,880,000,000 Hz
- ▣ CHANNEL: 600
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 008	0.0	0.000 000	0.0000
100 %		-30	1879 999 992	-15.7	-0.000 001	-0.0083
100 %		-20	1880 000 018	10.4	0.000 001	0.0055
100 %		-10	1880 000 022	13.6	0.000 001	0.0072
100 %		0	1880 000 030	21.7	0.000 001	0.0116
100 %		+10	1880 000 024	15.7	0.000 001	0.0083
100 %		+30	1880 000 030	22.2	0.000 001	0.0118
100 %		+40	1880 000 024	15.9	0.000 001	0.0085
100 %		+50	1880 000 035	26.5	0.000 001	0.0141
Batt. Endpoint		3.650	+20	1880 000 027	19.4	0.000 001

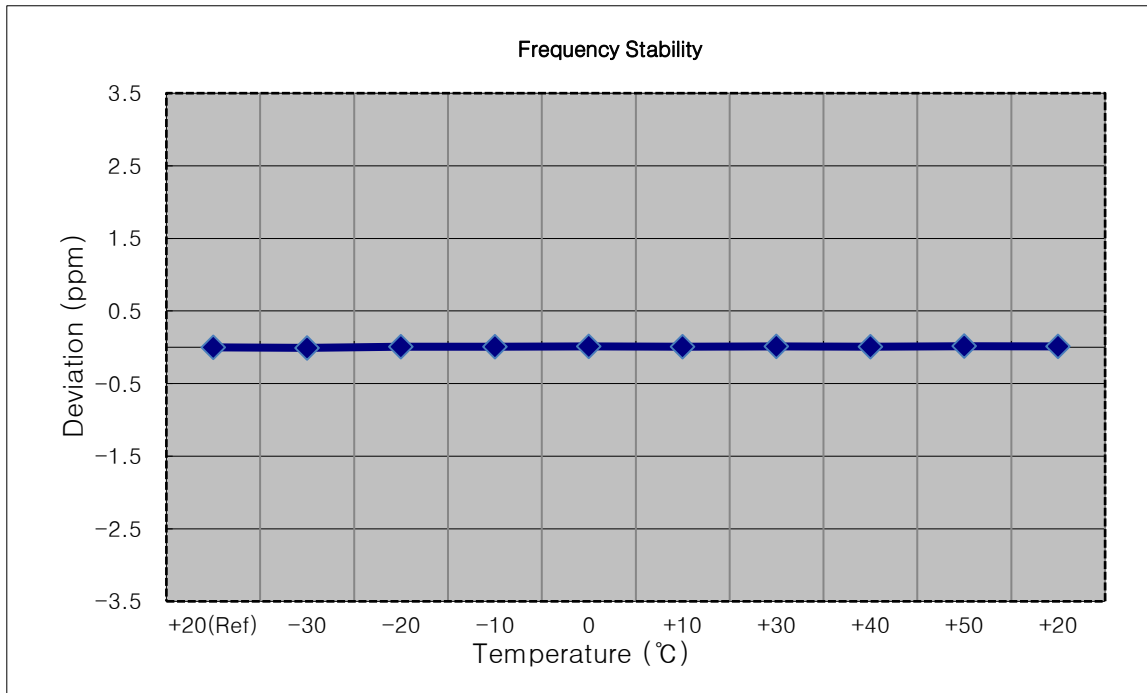


- ▣ Mode: CDMA PCS
- ▣ OPERATING FREQUENCY: 1,908,750,000 Hz
- ▣ CHANNEL: 1175
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1908 749 985	0.0	0.000 000	0.0000
100 %		-30	1908 749 971	-14.3	-0.000 001	-0.0075
100 %		-20	1908 749 968	-16.7	-0.000 001	-0.0088
100 %		-10	1908 749 964	-21.1	-0.000 001	-0.0110
100 %		0	1908 749 964	-21.1	-0.000 001	-0.0110
100 %		+10	1908 749 967	-18.1	-0.000 001	-0.0095
100 %		+30	1908 749 969	-16.2	-0.000 001	-0.0085
100 %		+40	1908 749 963	-21.6	-0.000 001	-0.0113
100 %		+50	1908 749 971	-13.6	-0.000 001	-0.0071
Batt. Endpoint	3.650	+20	1908 749 965	-20.5	-0.000 001	-0.0108

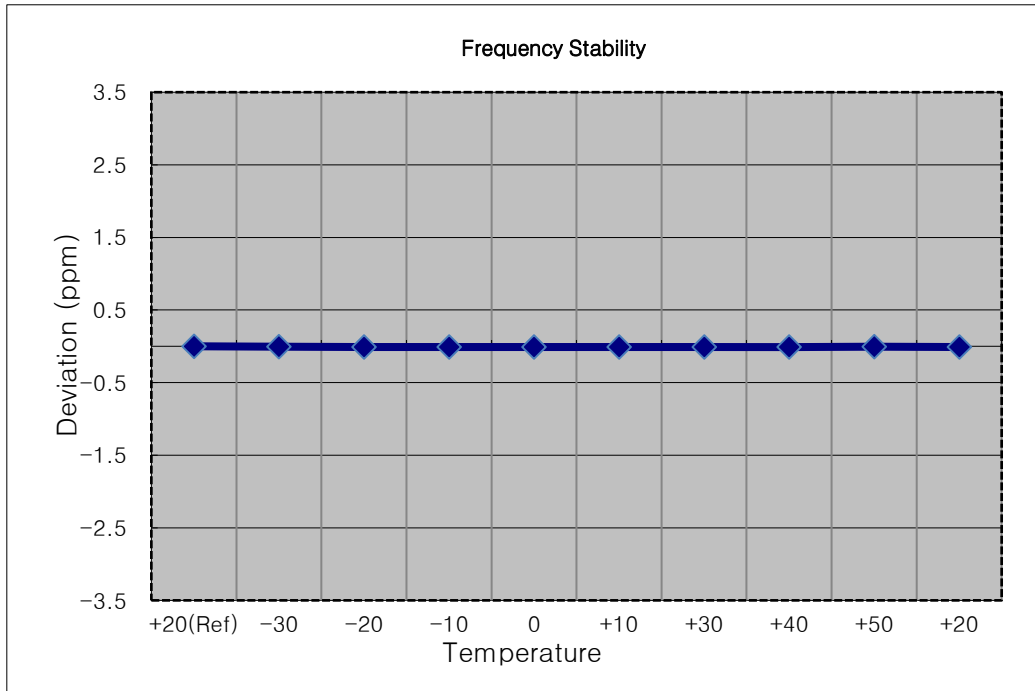


9. TEST PLOTS


■ GSM850 MODE (128 CH.) Occupied Bandwidth

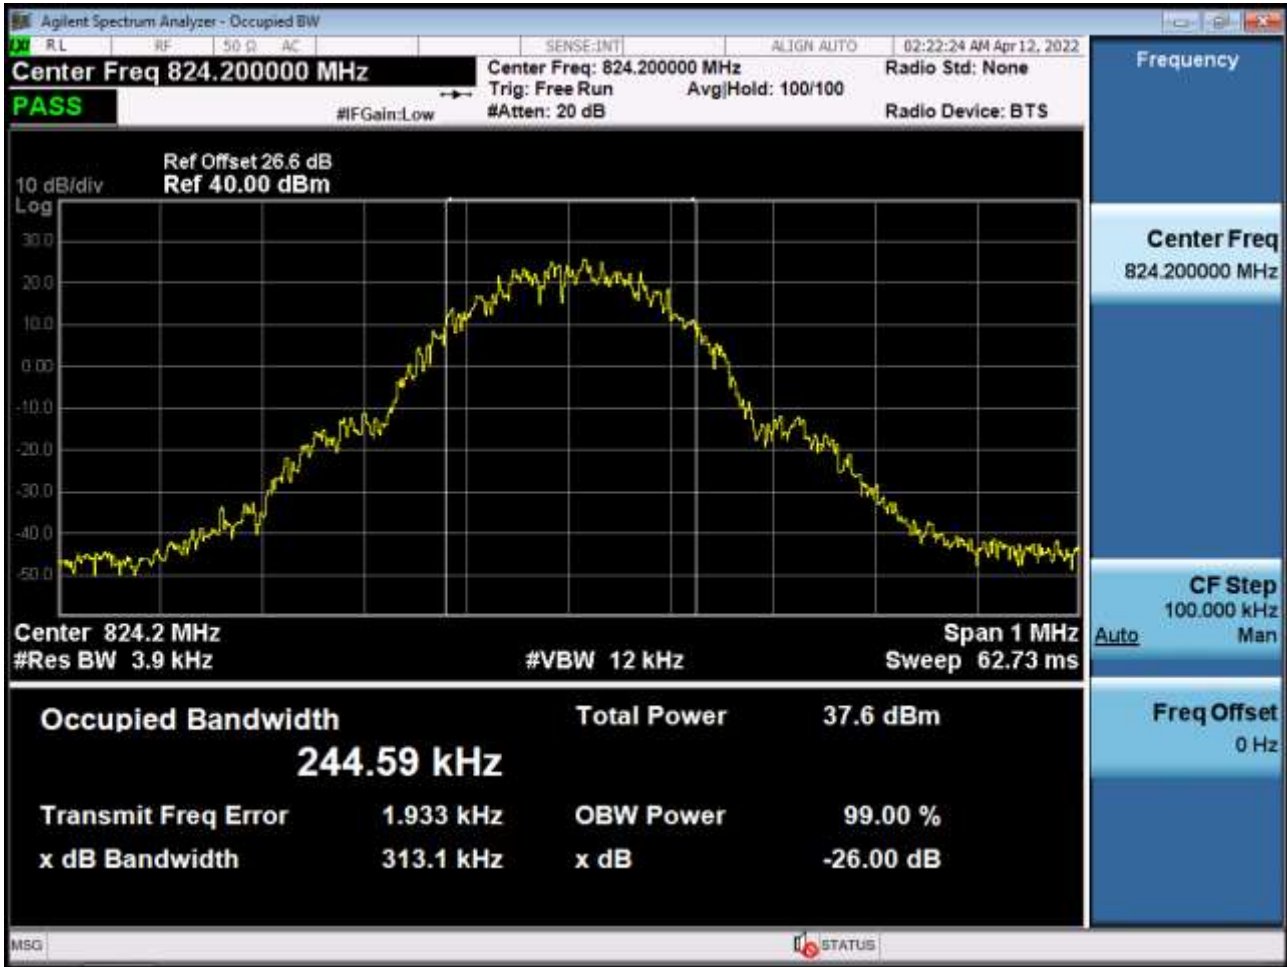


■ GSM850 MODE (190 CH.) Occupied Bandwidth

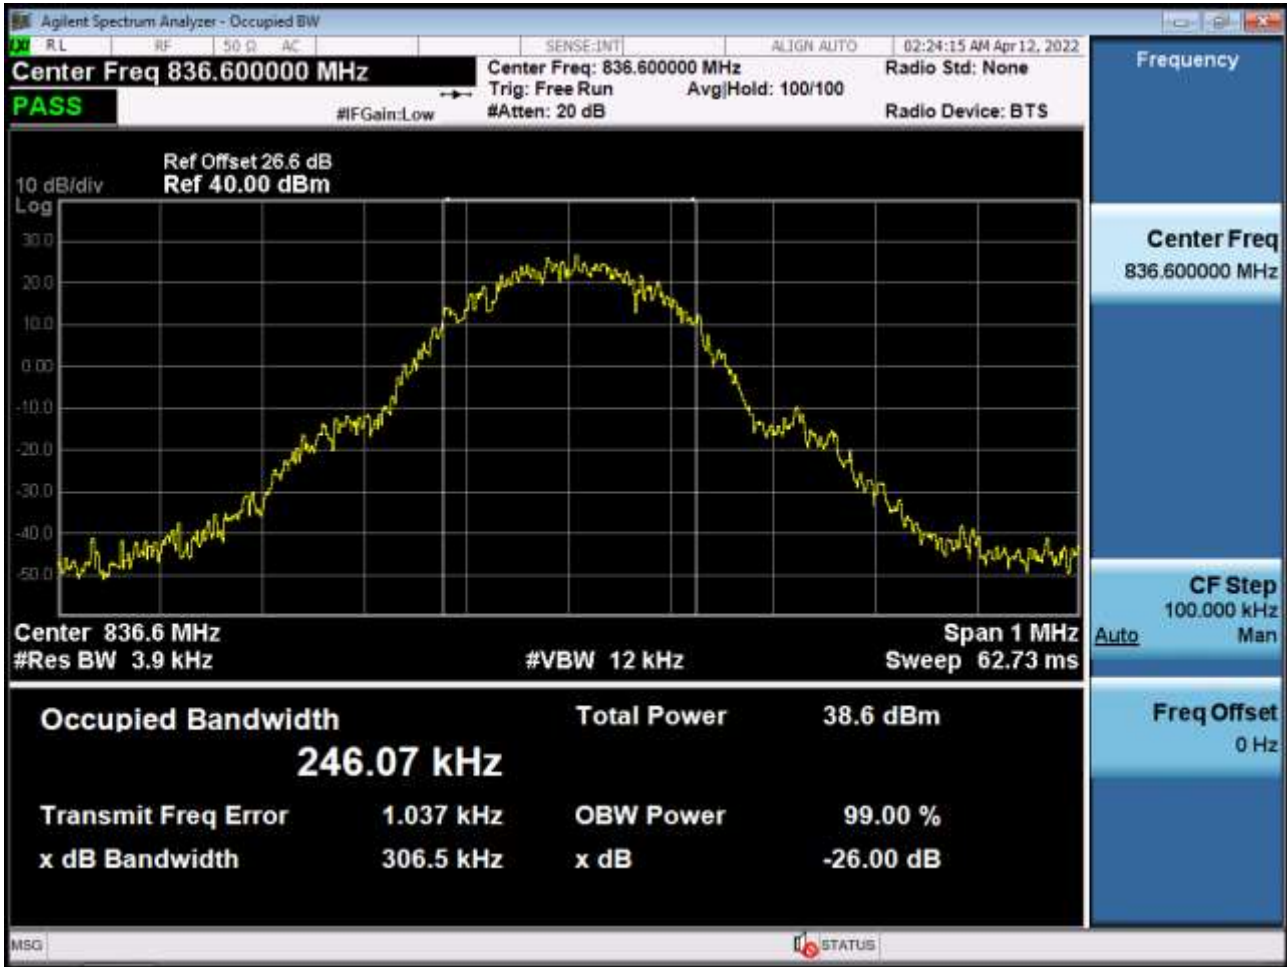


■ GSM850 MODE (251 CH.) Occupied Bandwidth

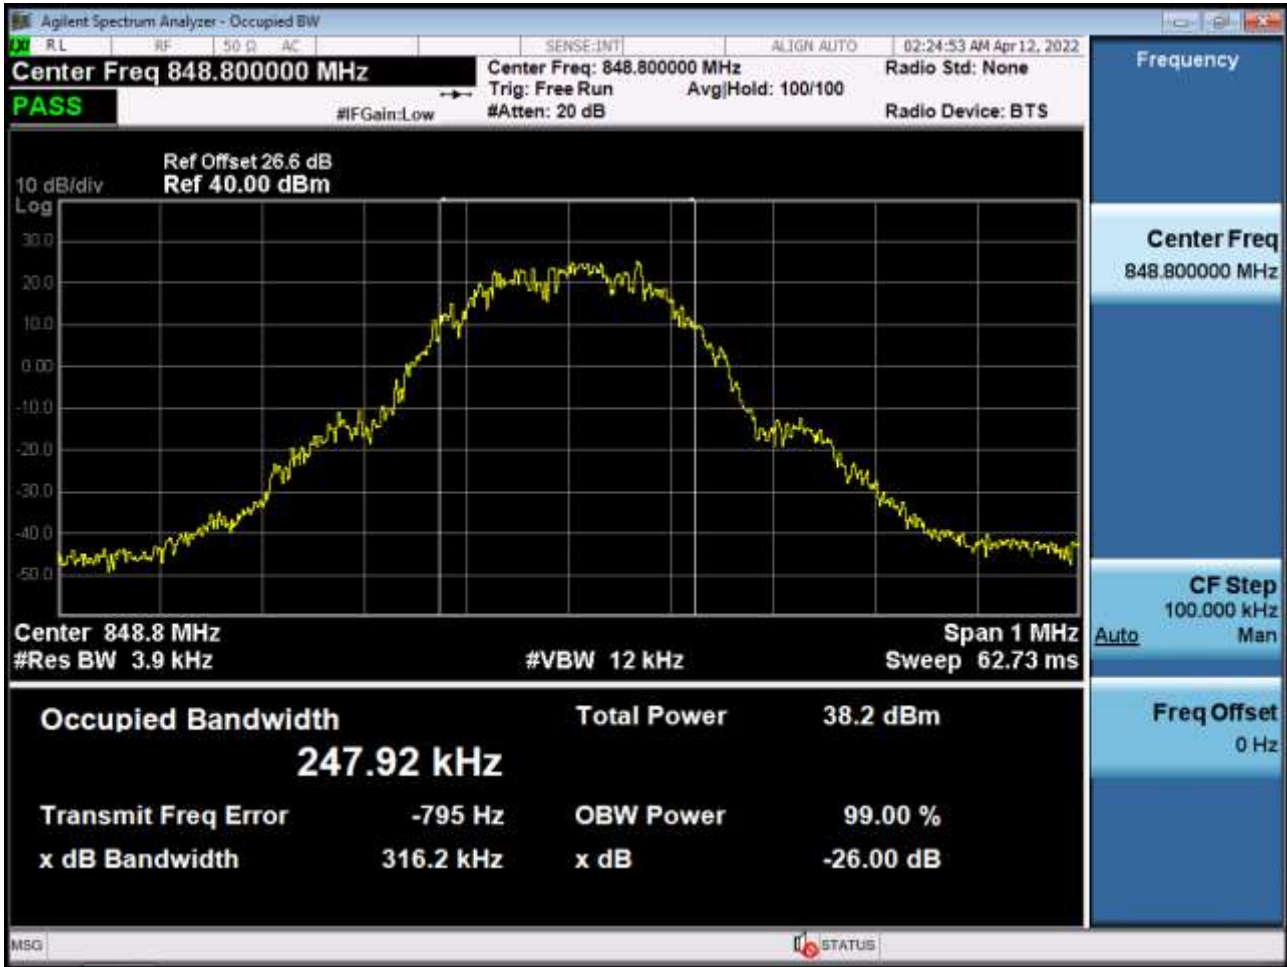


■ GSM850 EDGE (251 CH.) Occupied Bandwidth

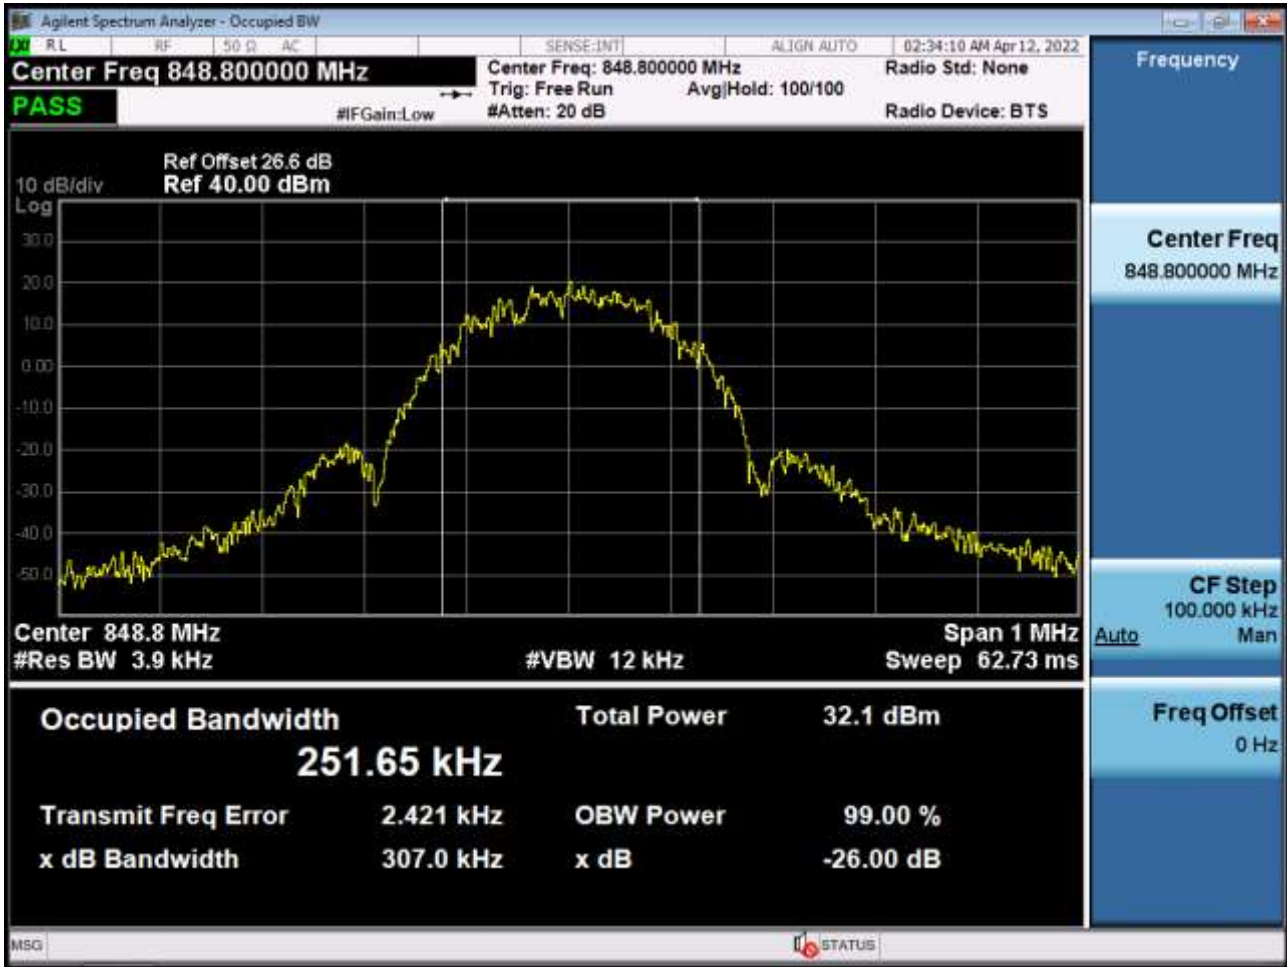


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

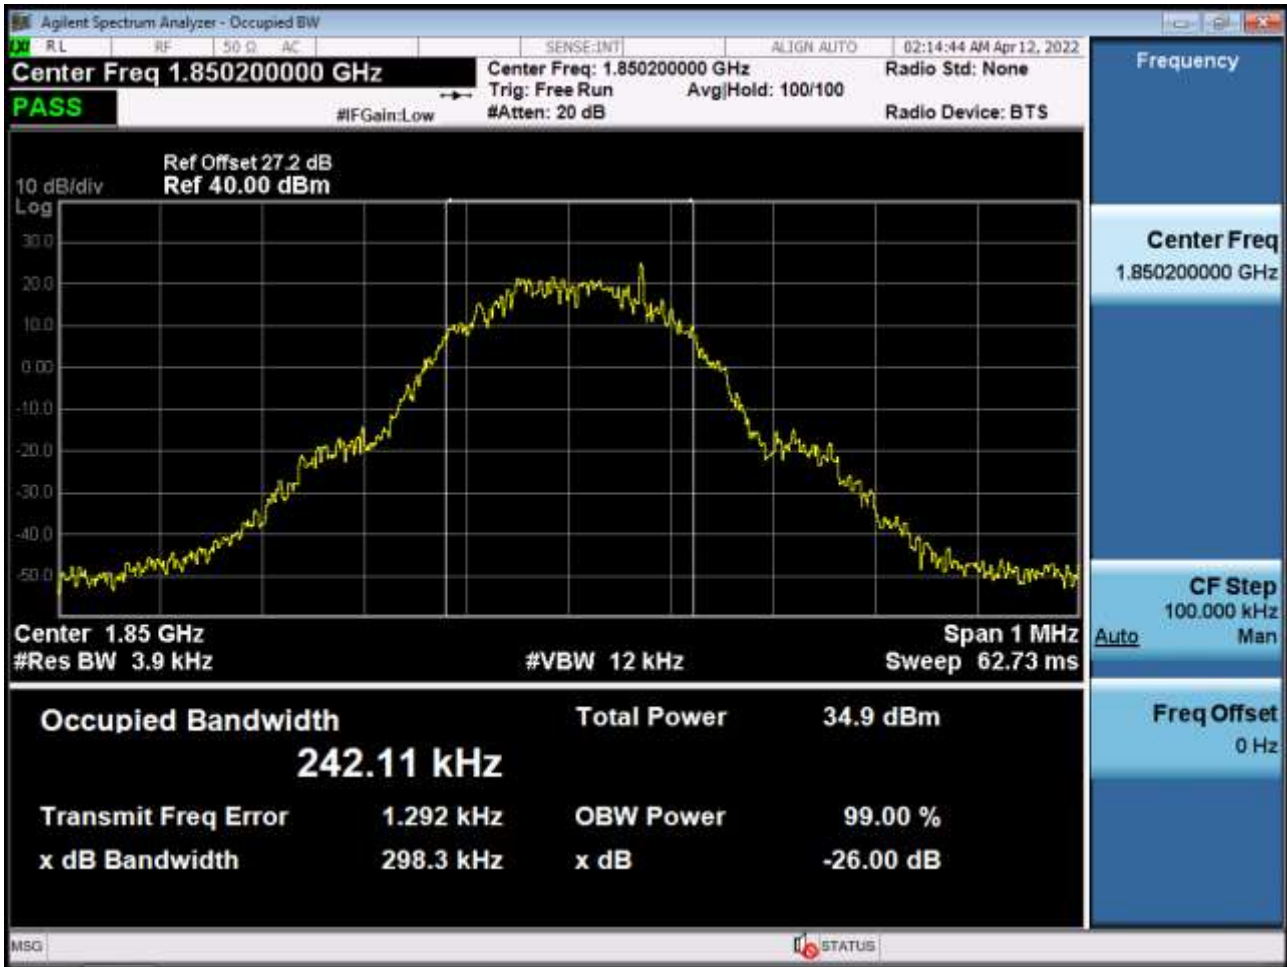


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

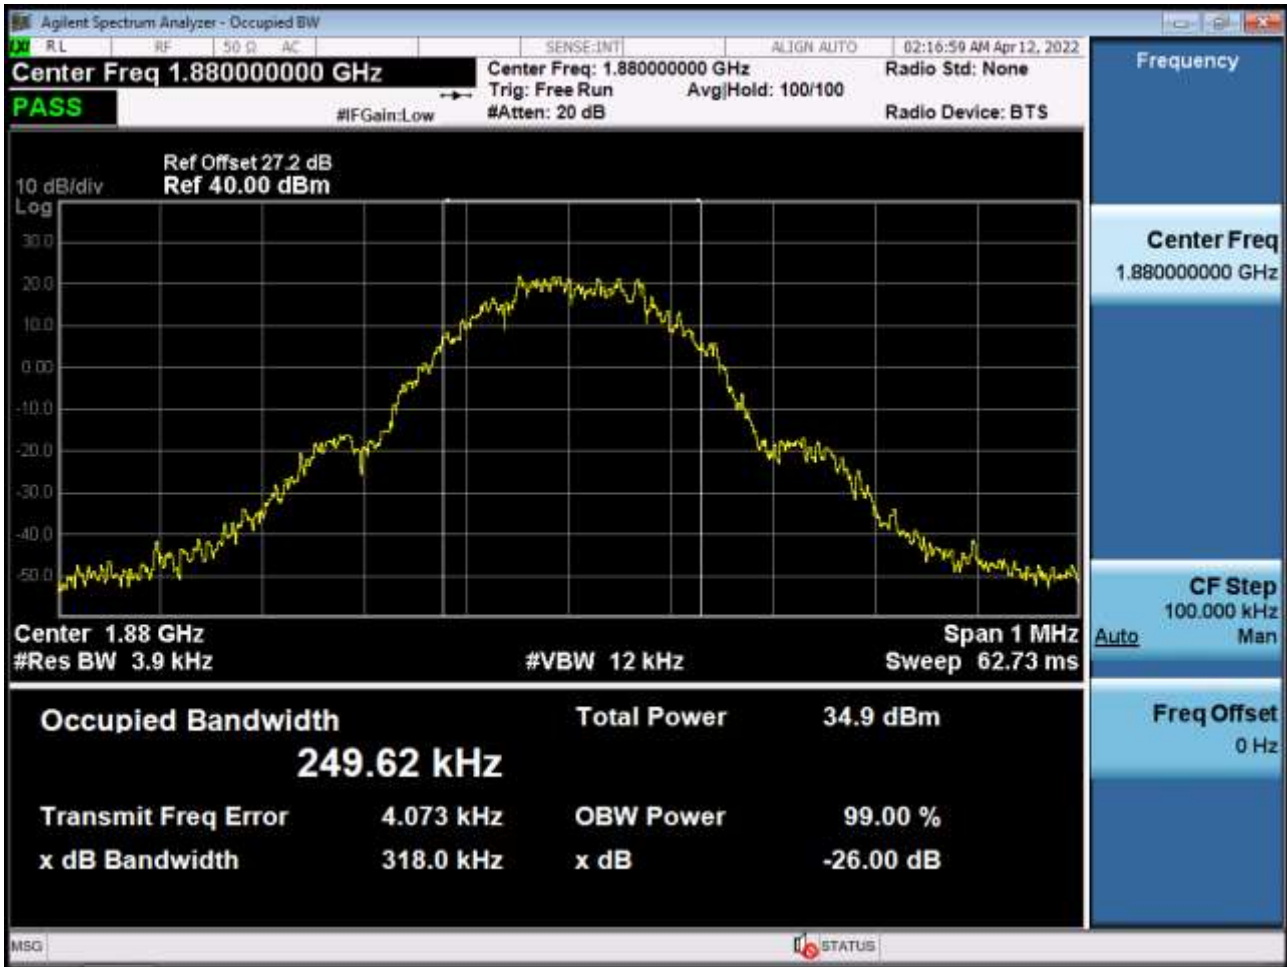


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

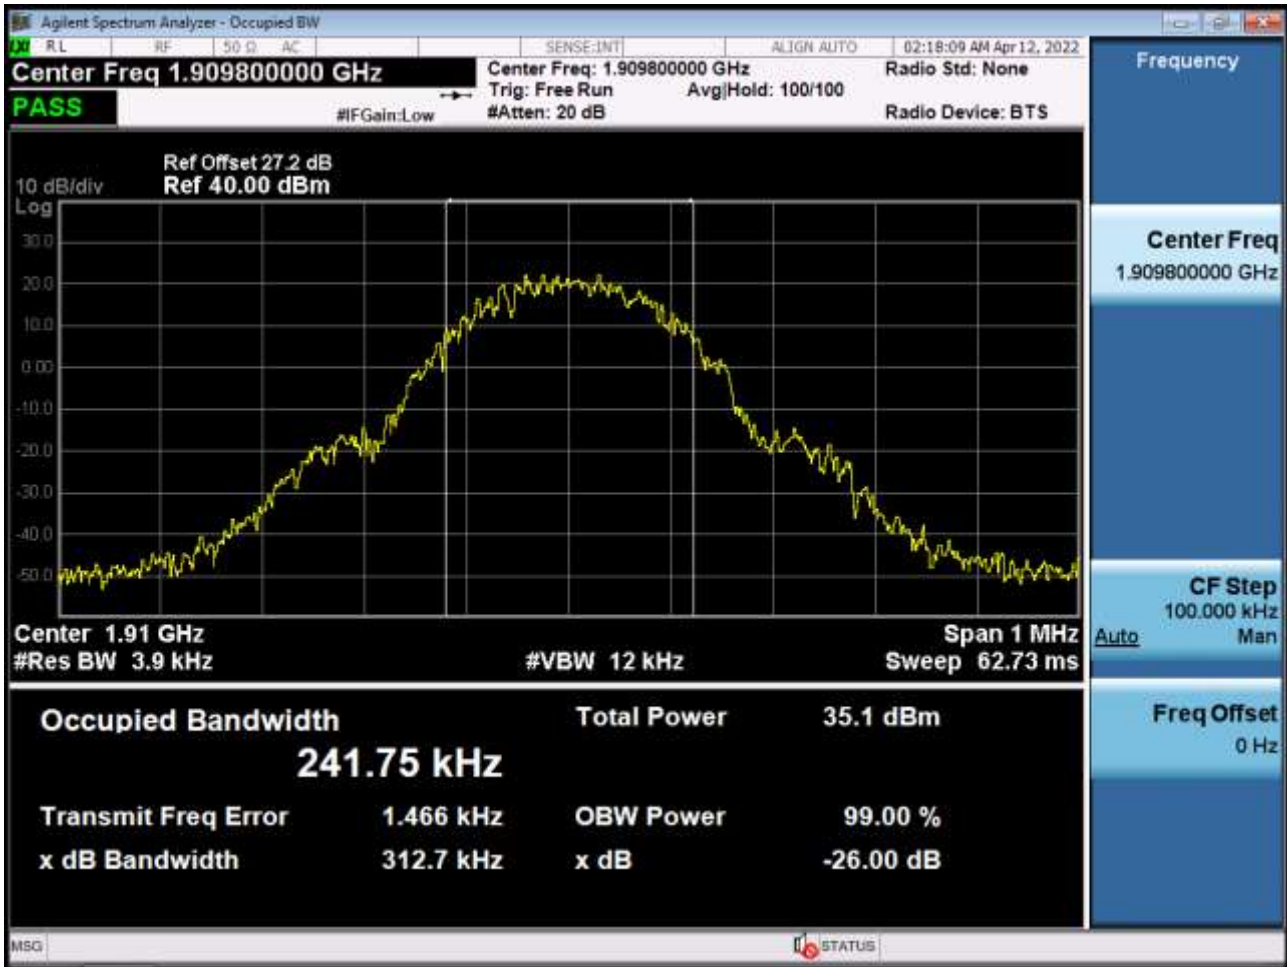


■ GSM1900 EDGE (810 CH.) Occupied Bandwidth

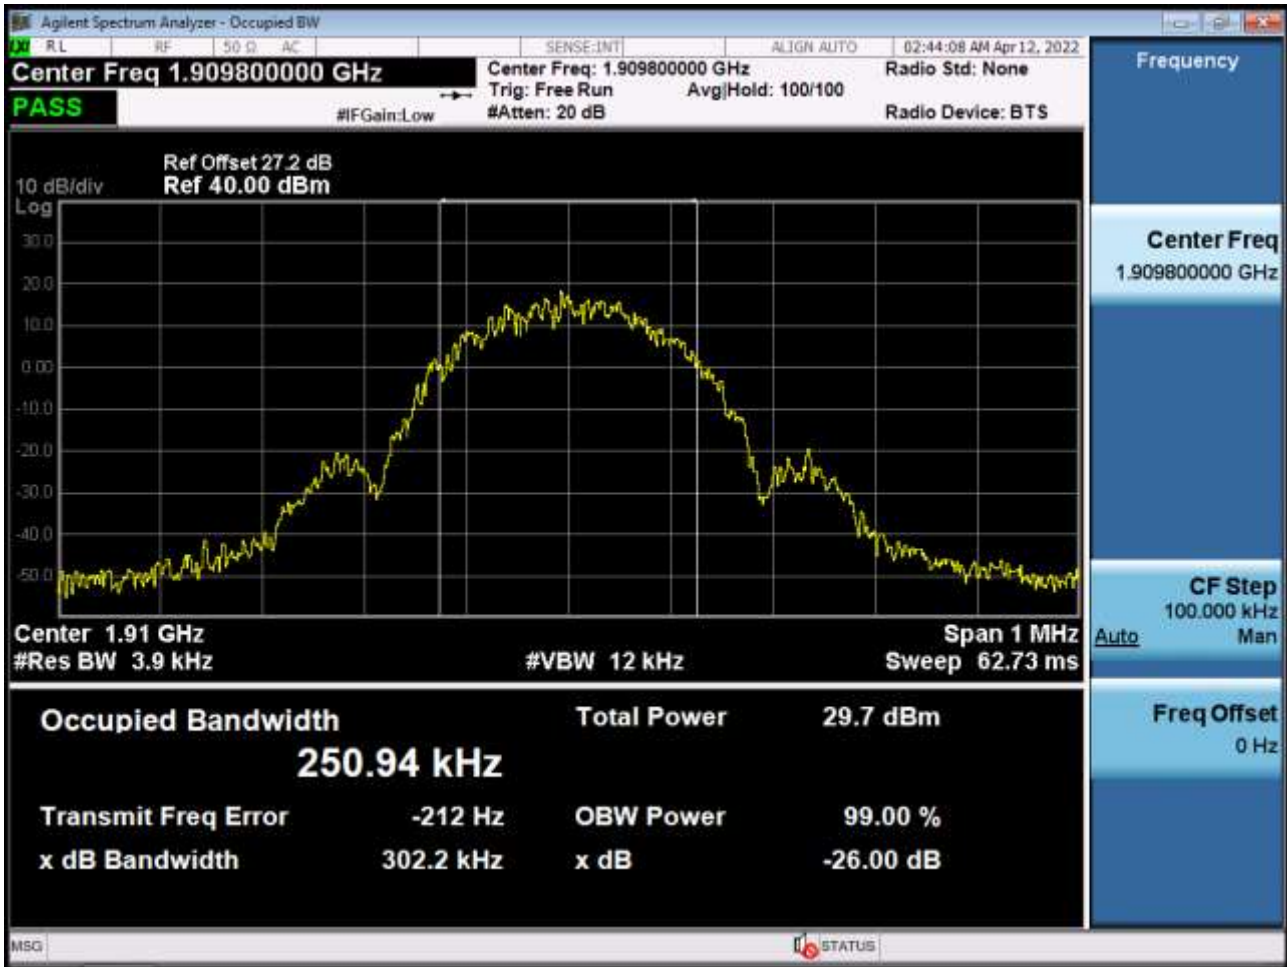


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

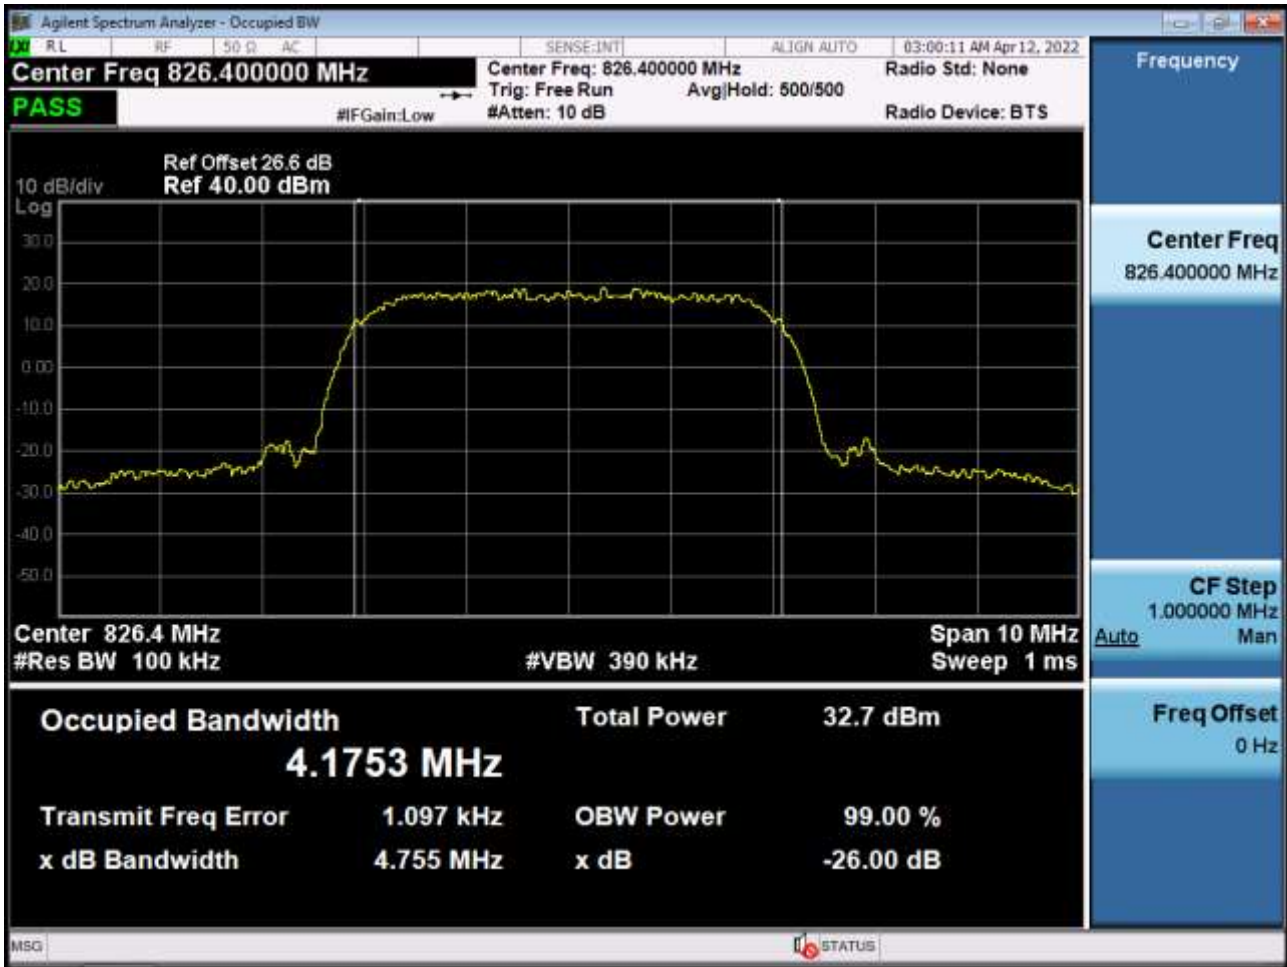


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

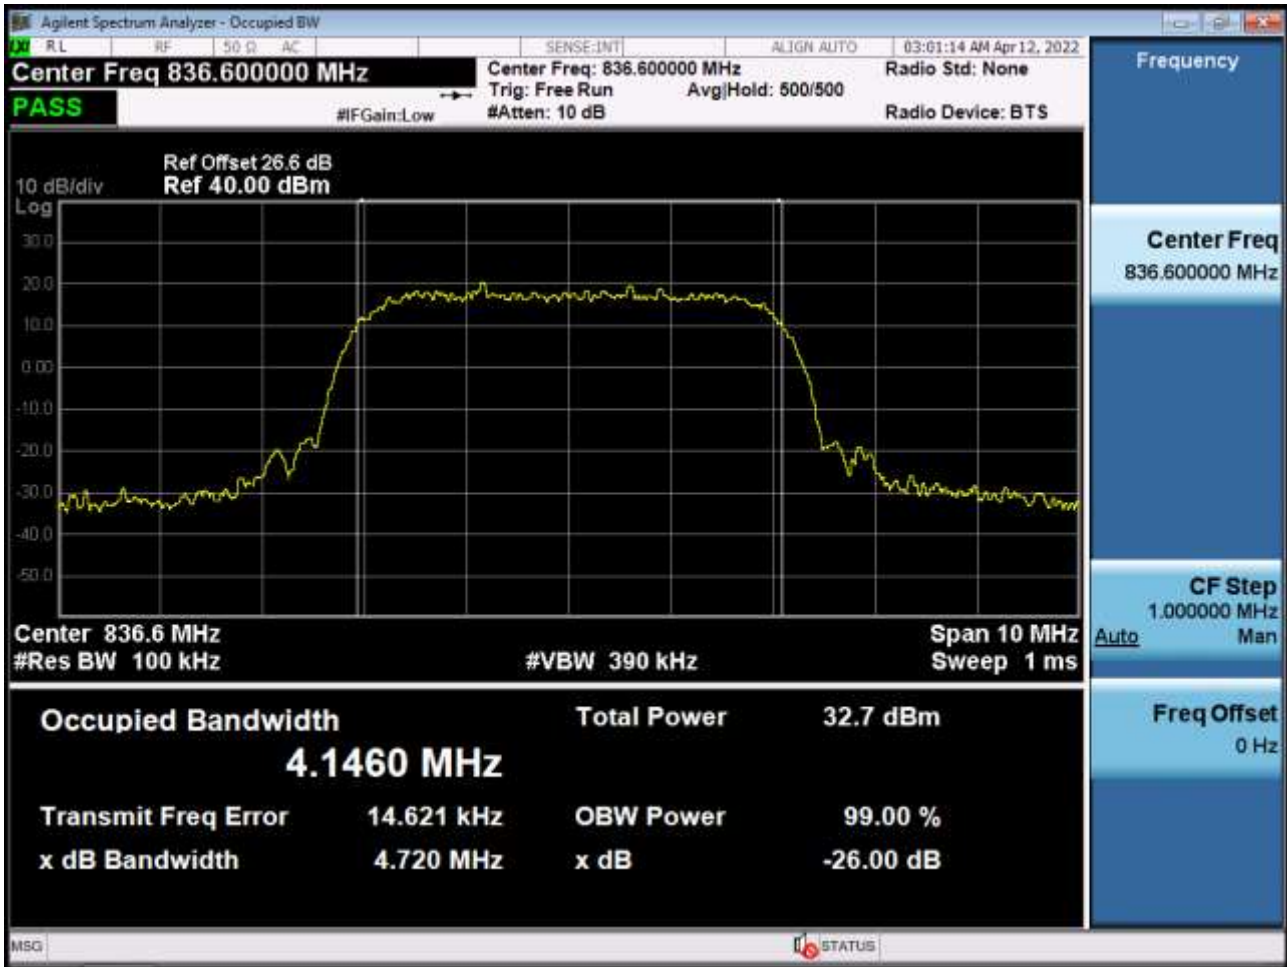


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

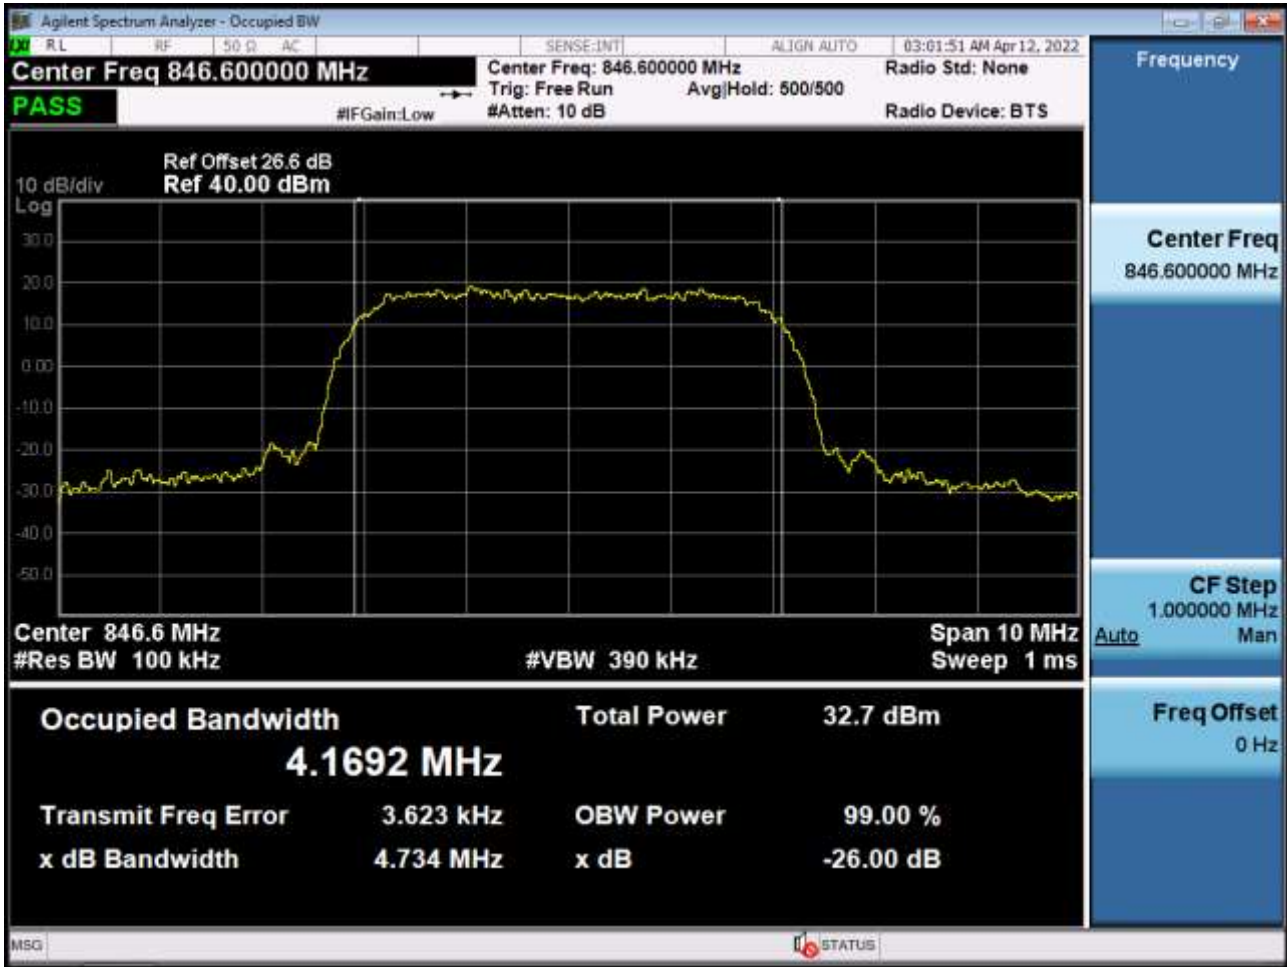


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

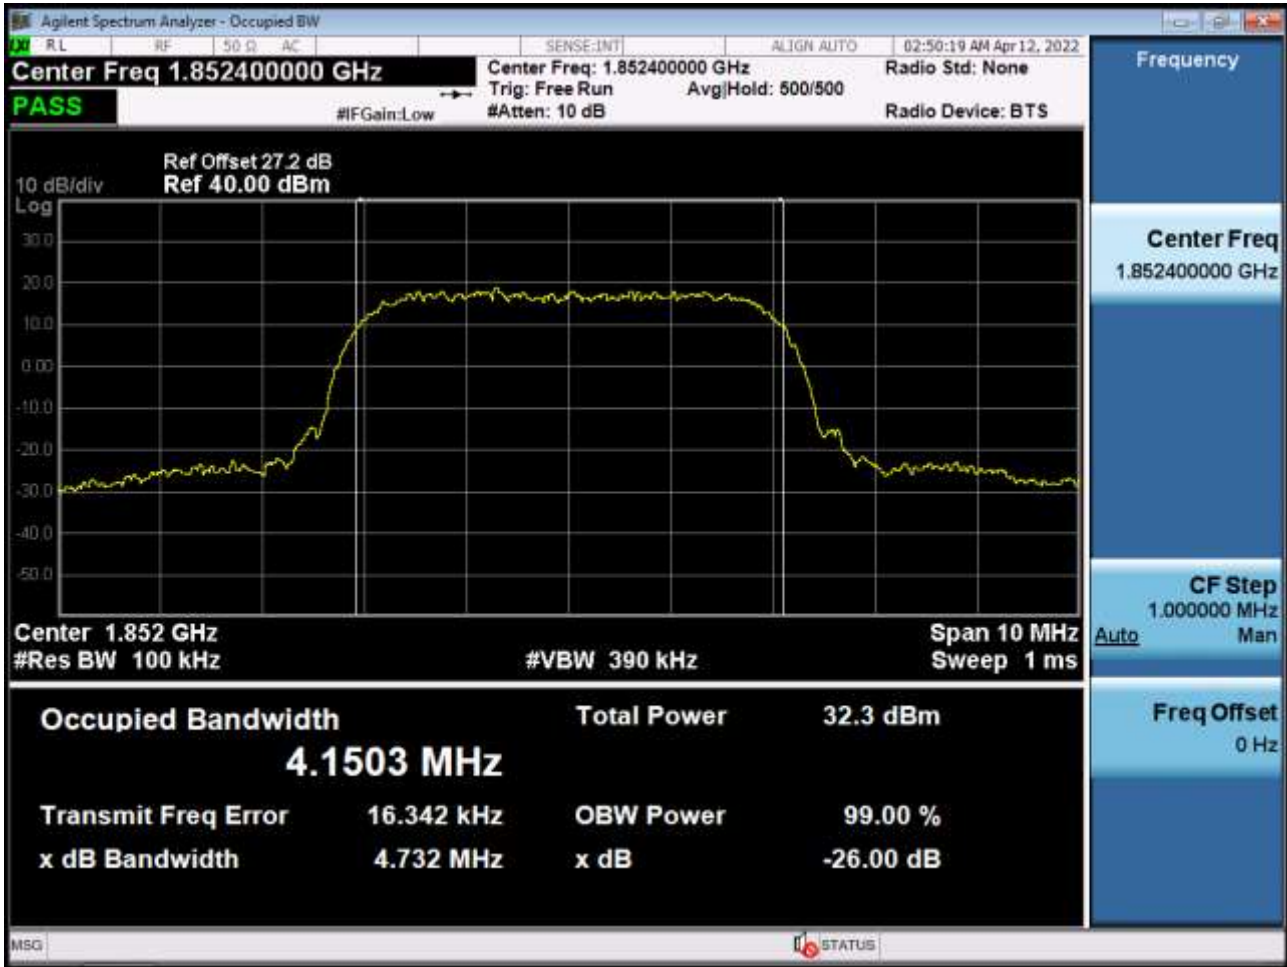


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

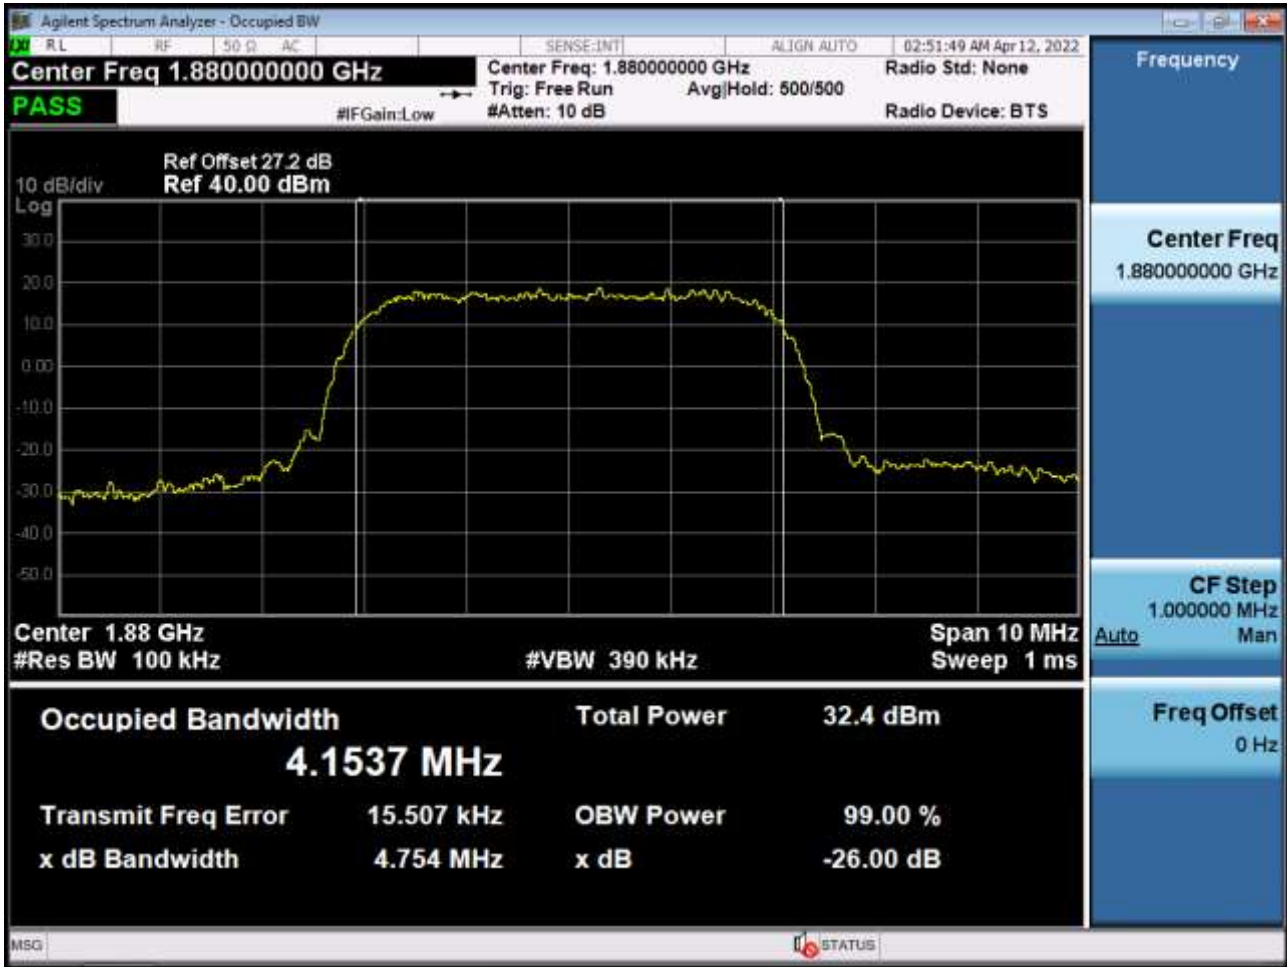


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

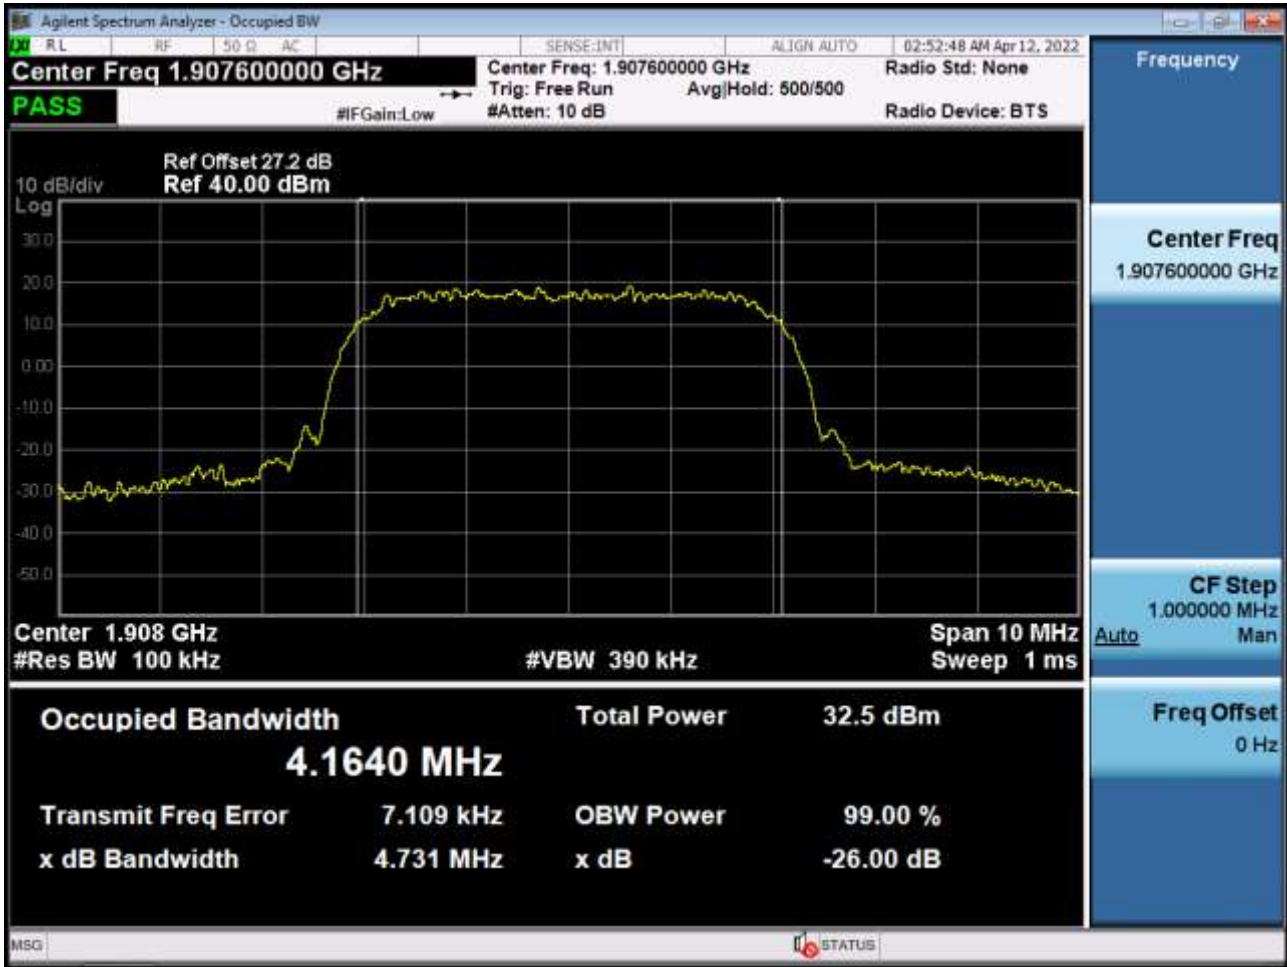


■ WCDMA1700 MODE (1312 CH.) Occupied Bandwidth

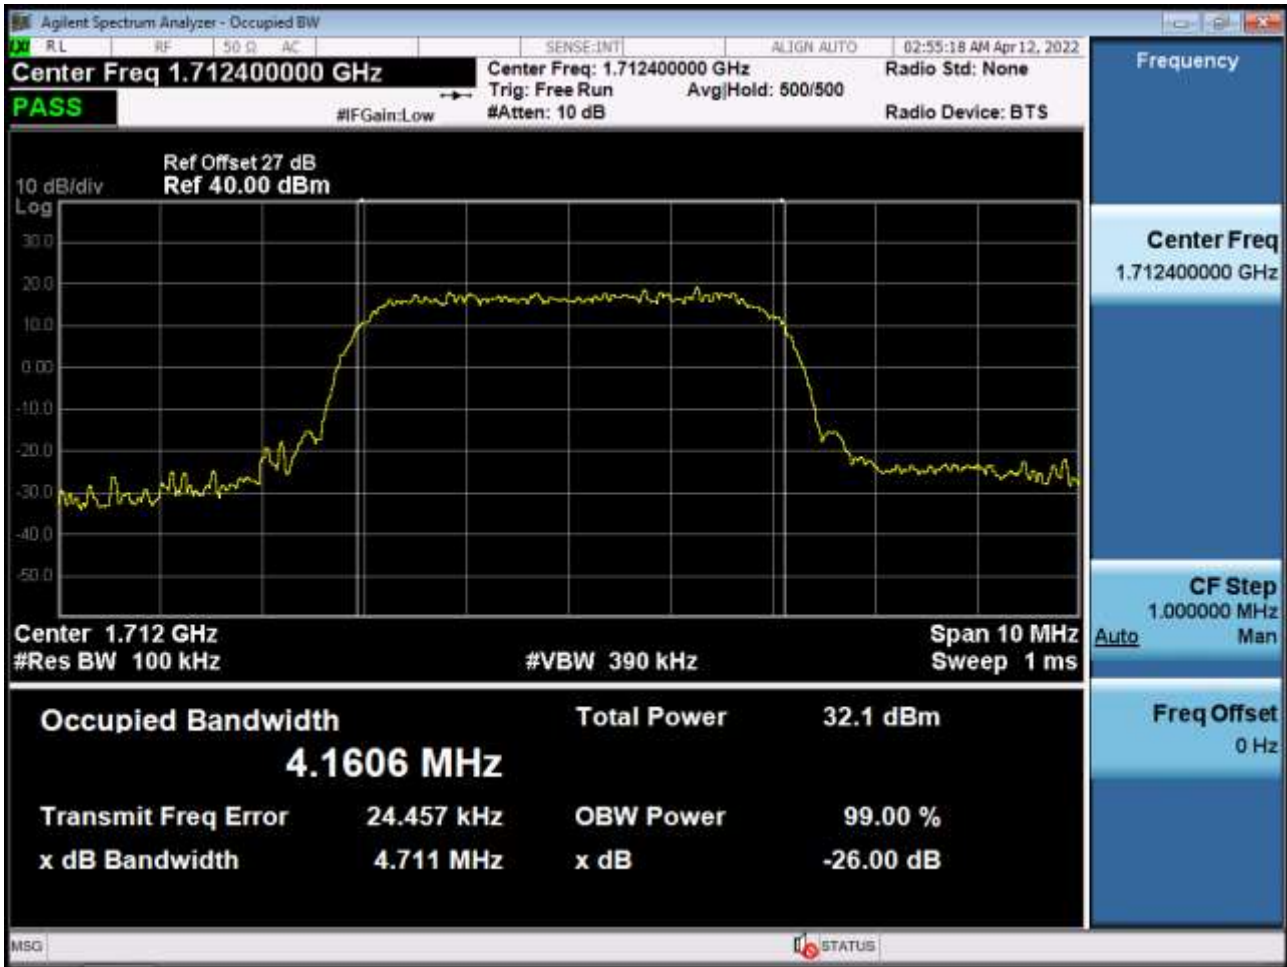


■ WCDMA1700 MODE (1412 CH.) Occupied Bandwidth

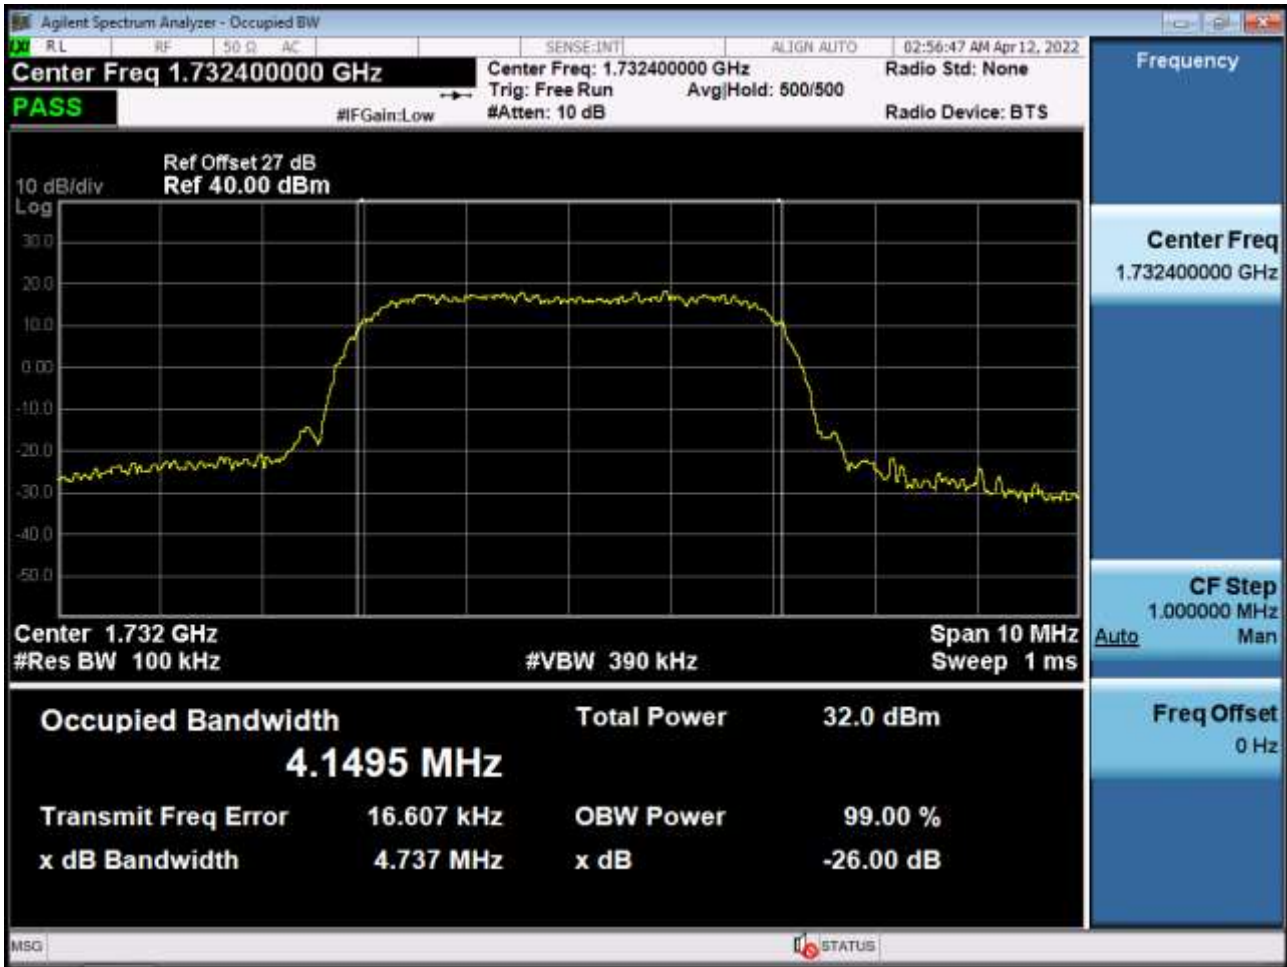


■ WCDMA1700 MODE (1513 CH.) Occupied Bandwidth

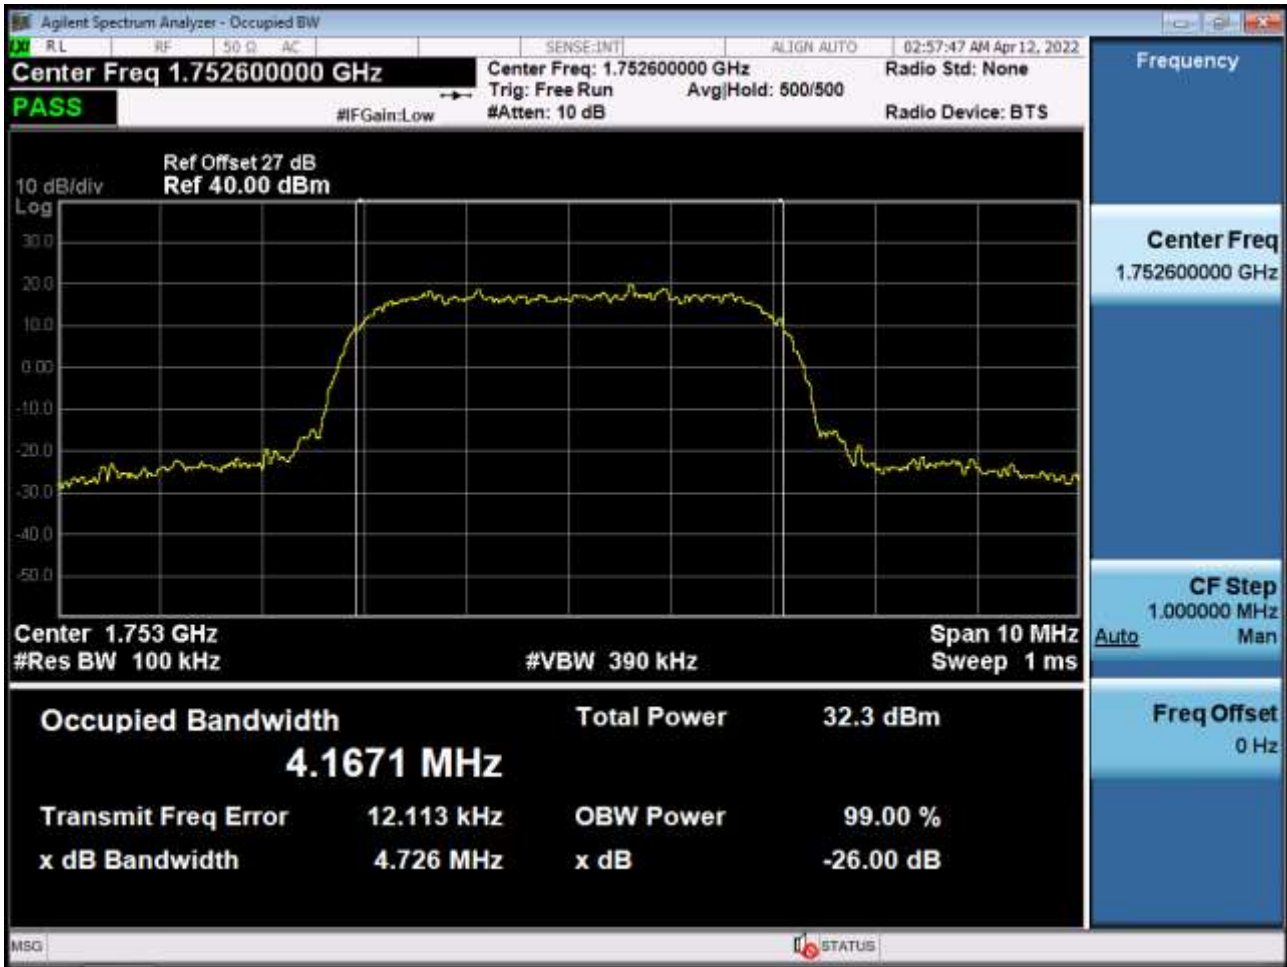


■ Secondary800_BC10 MODE (476 CH.) Occupied Bandwidth

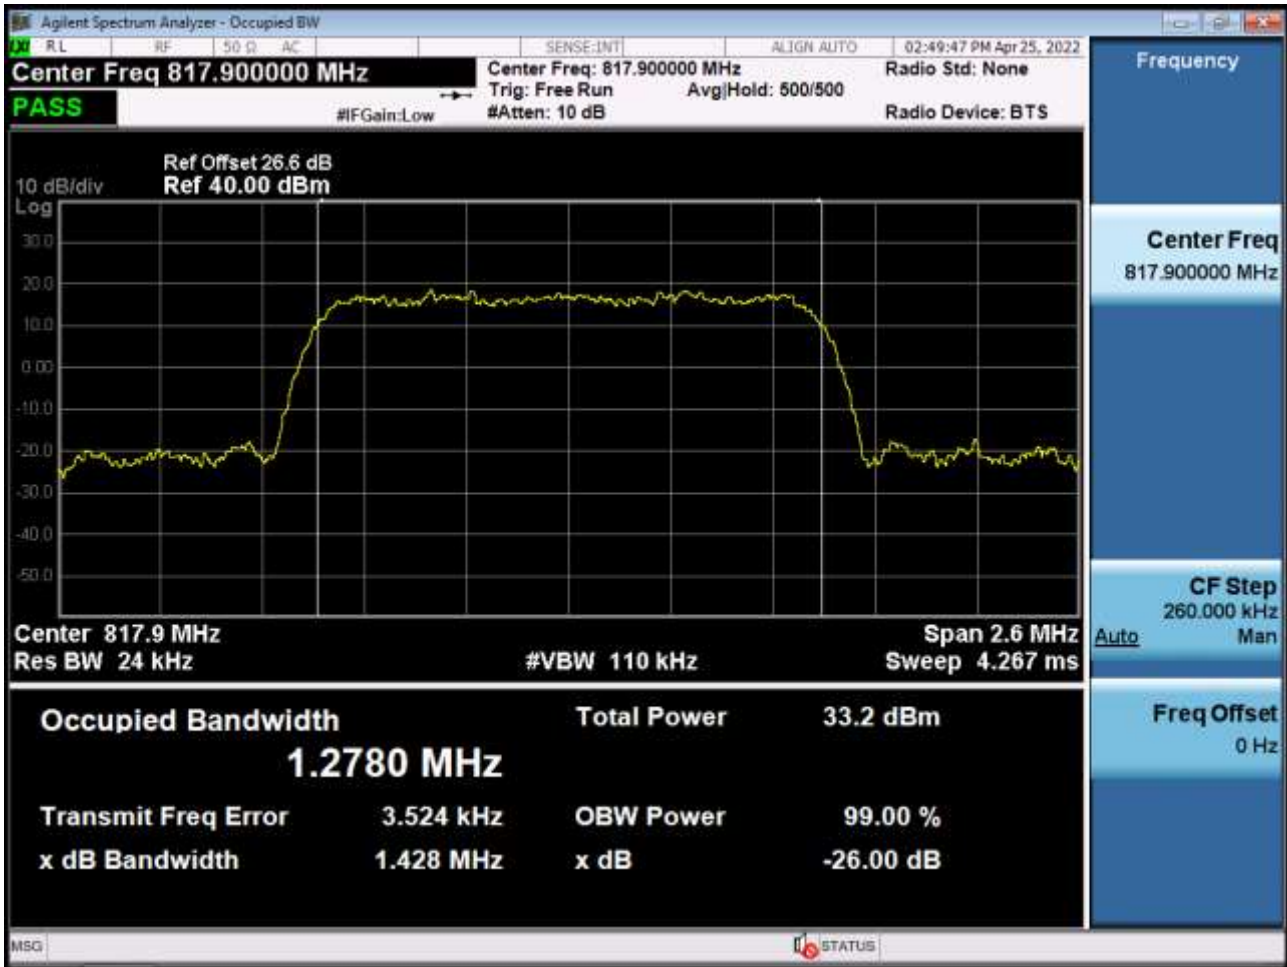


■ CDMA850_BC0 MODE (1013 CH.) Occupied Bandwidth

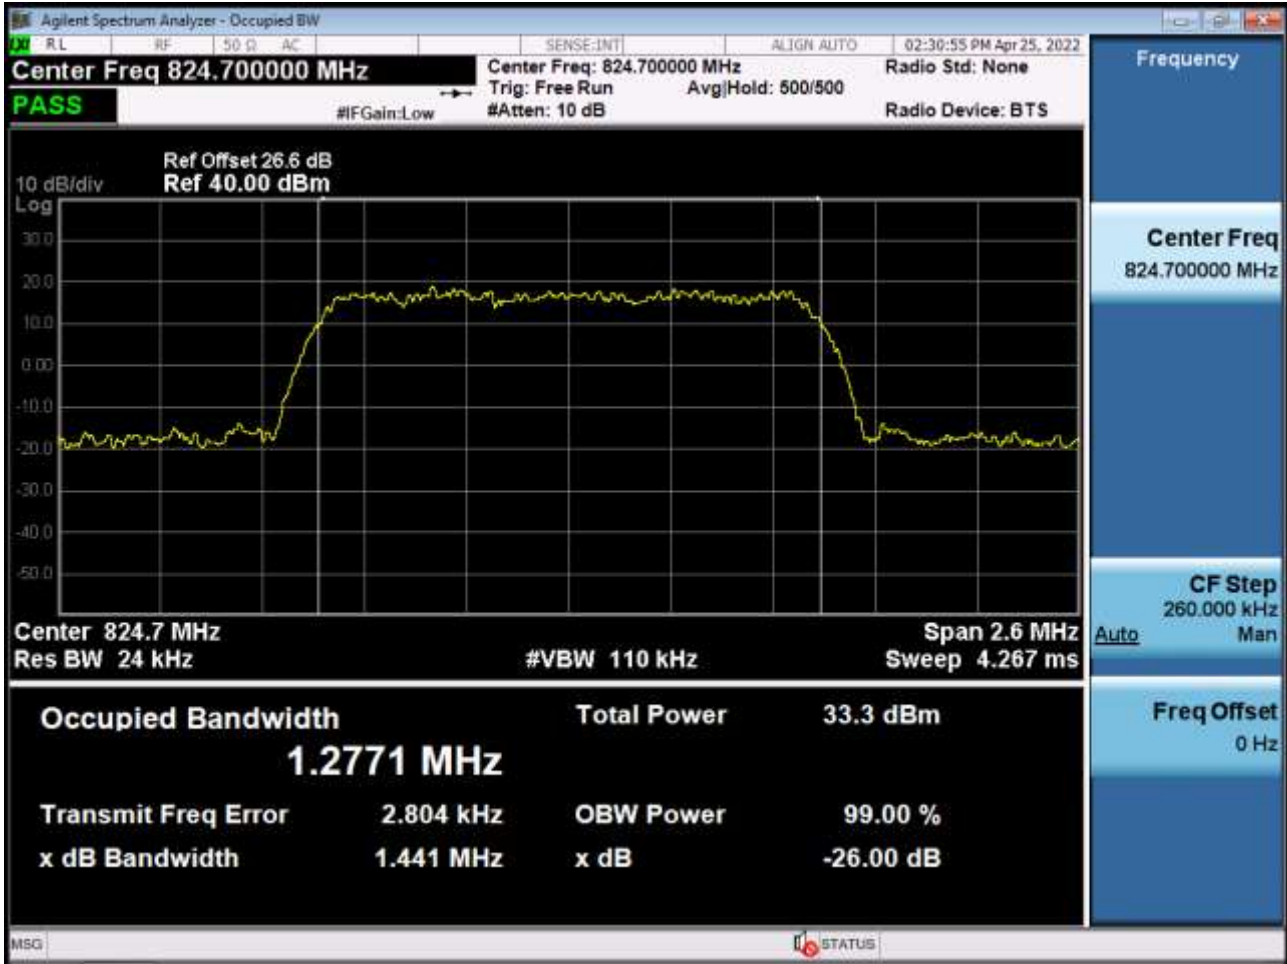


■ PCS CDMA MODE (25 CH.) Occupied Bandwidth

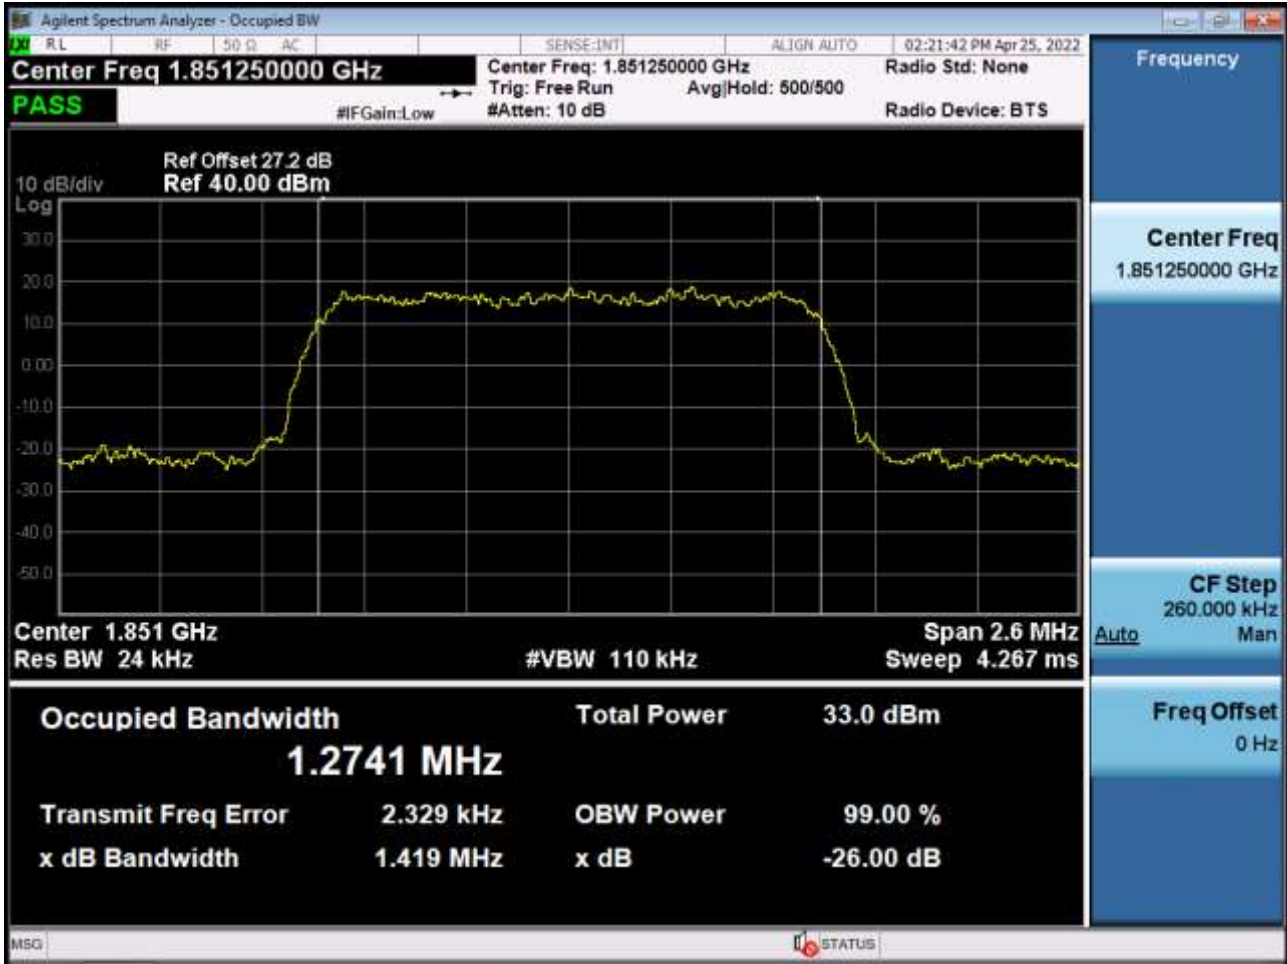


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{pk}

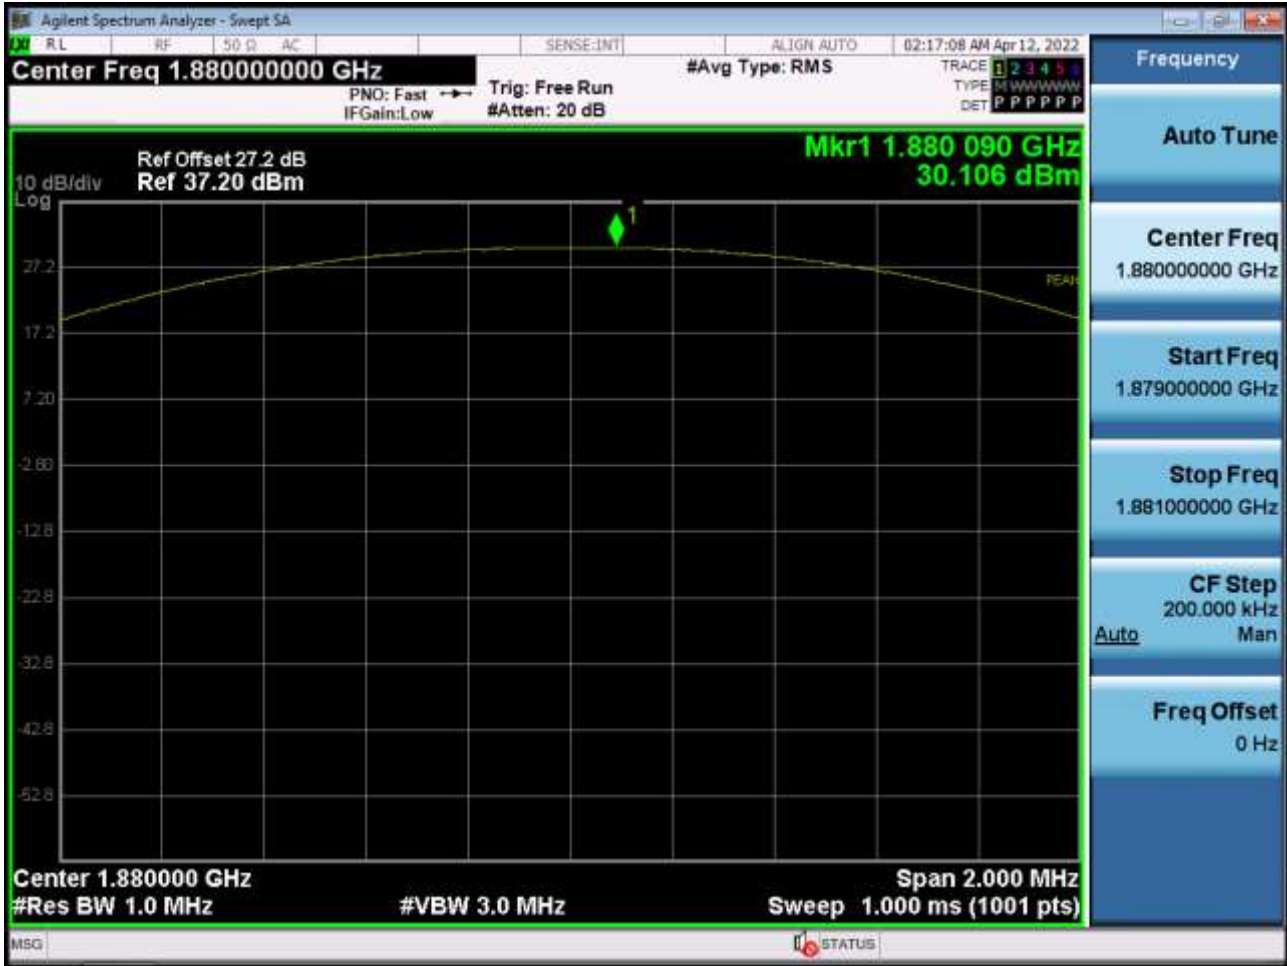


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

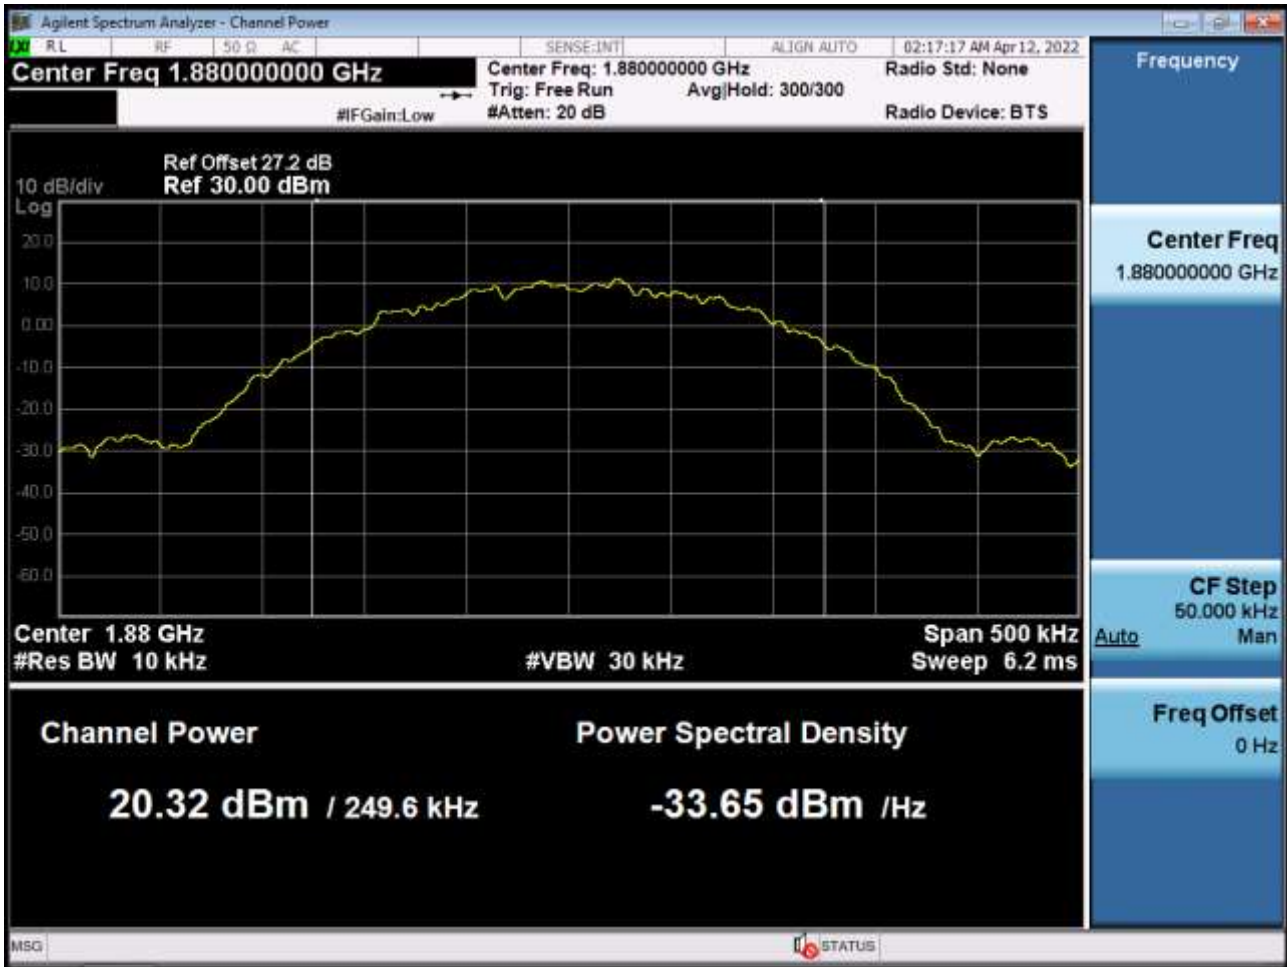


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio Duty

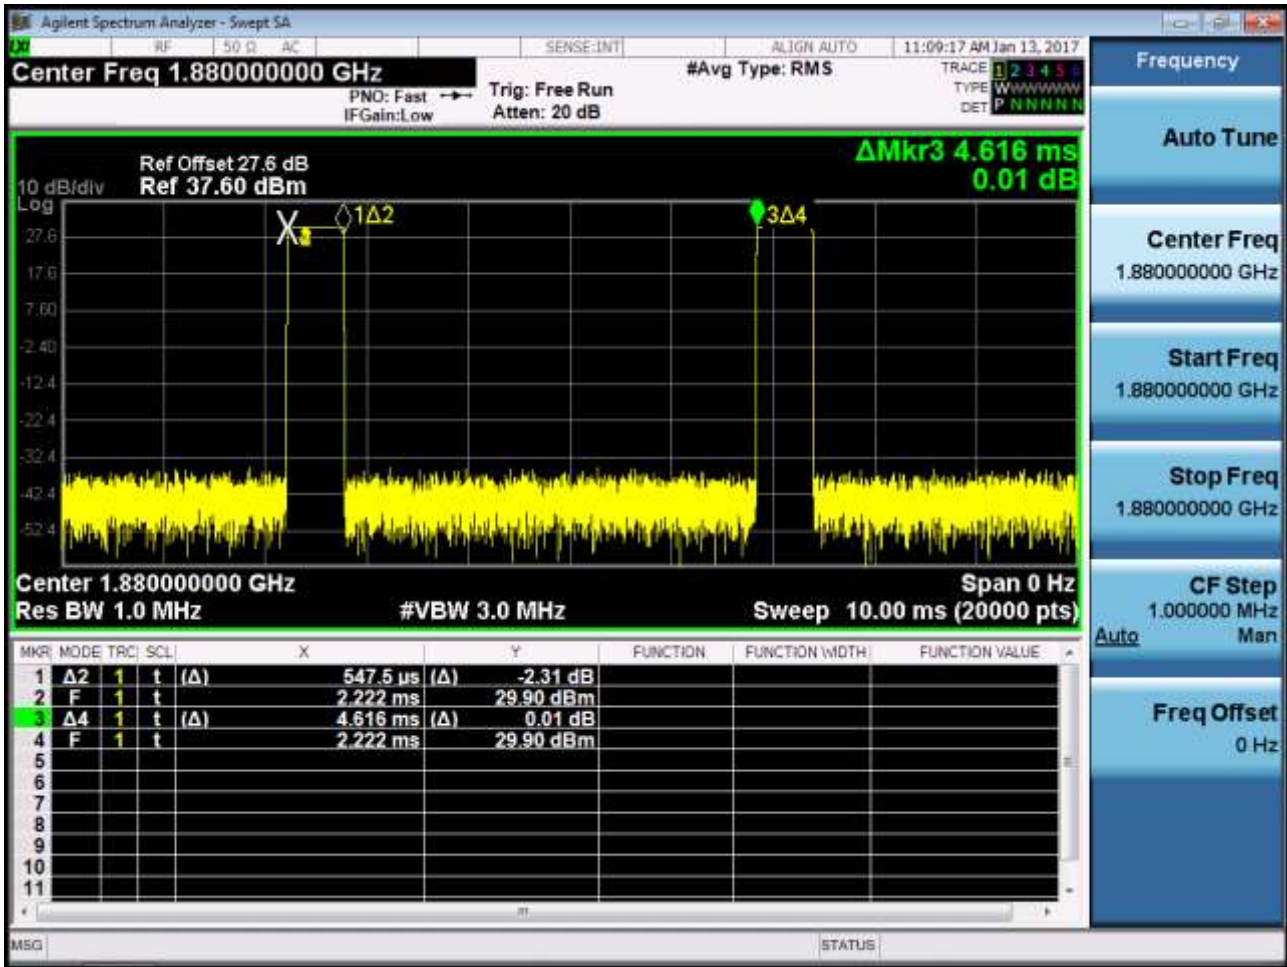

■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio Duty

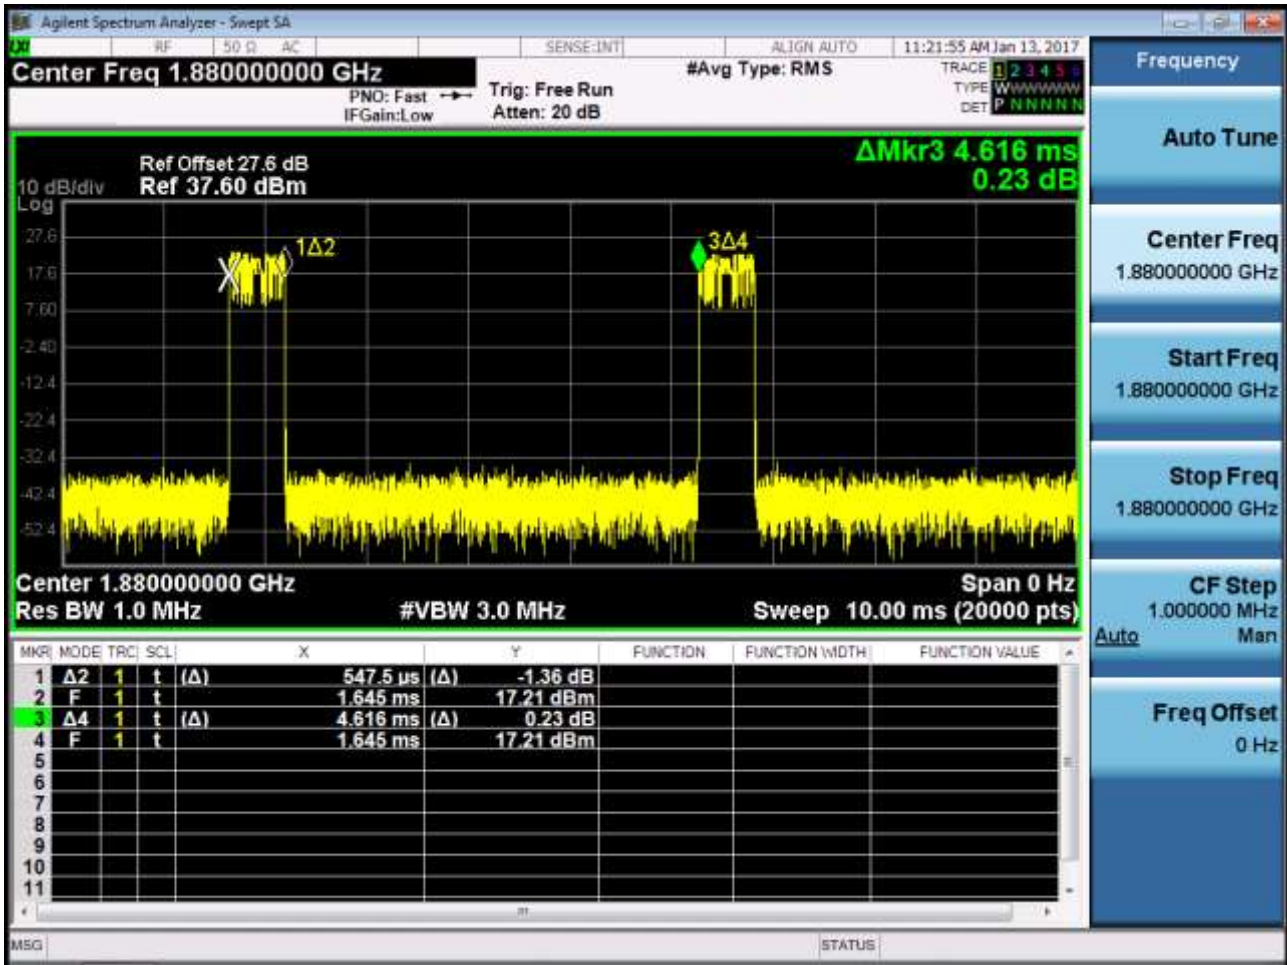


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{PK}

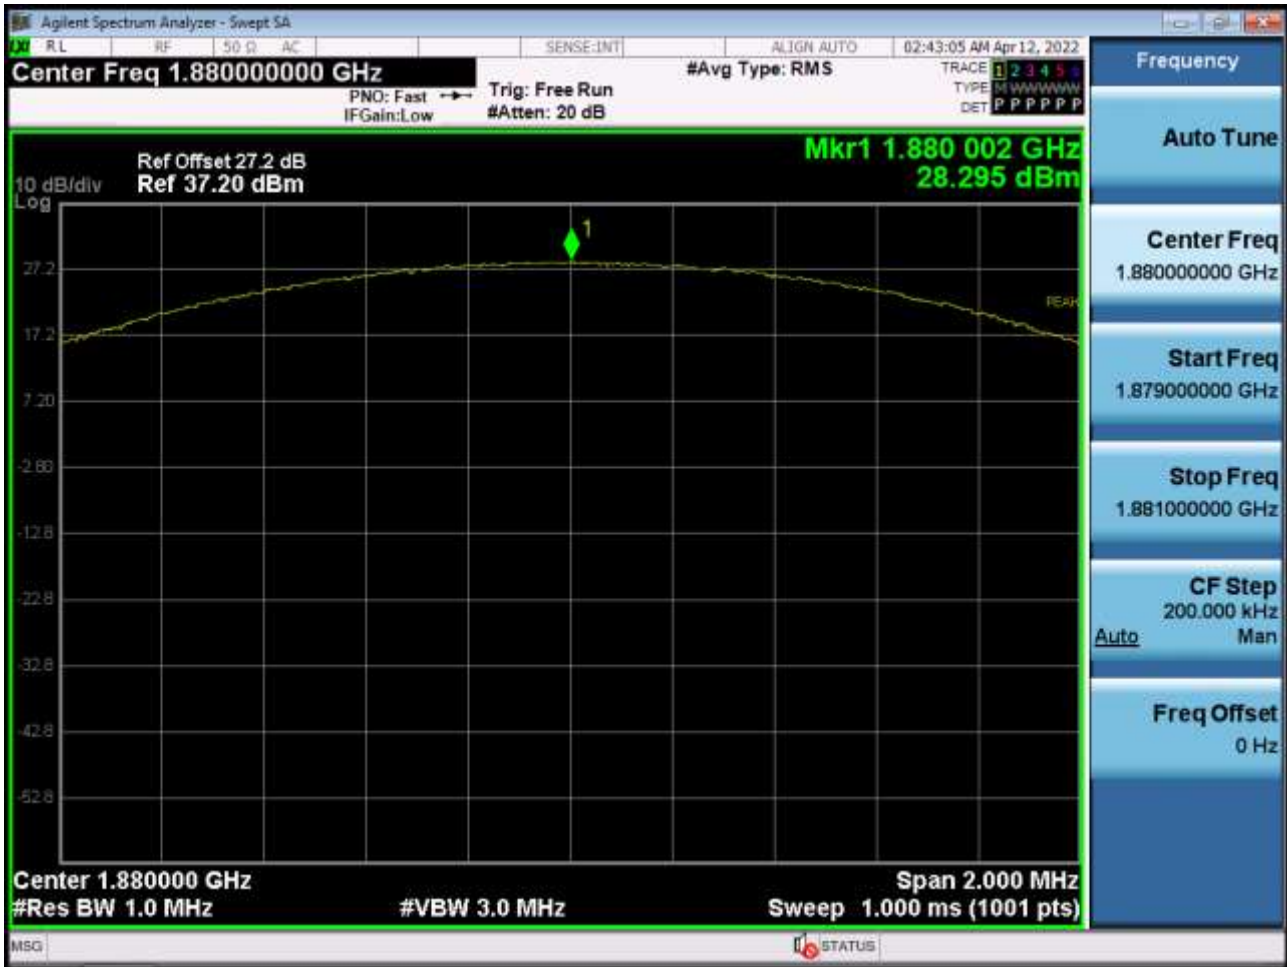


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{AVG}




■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

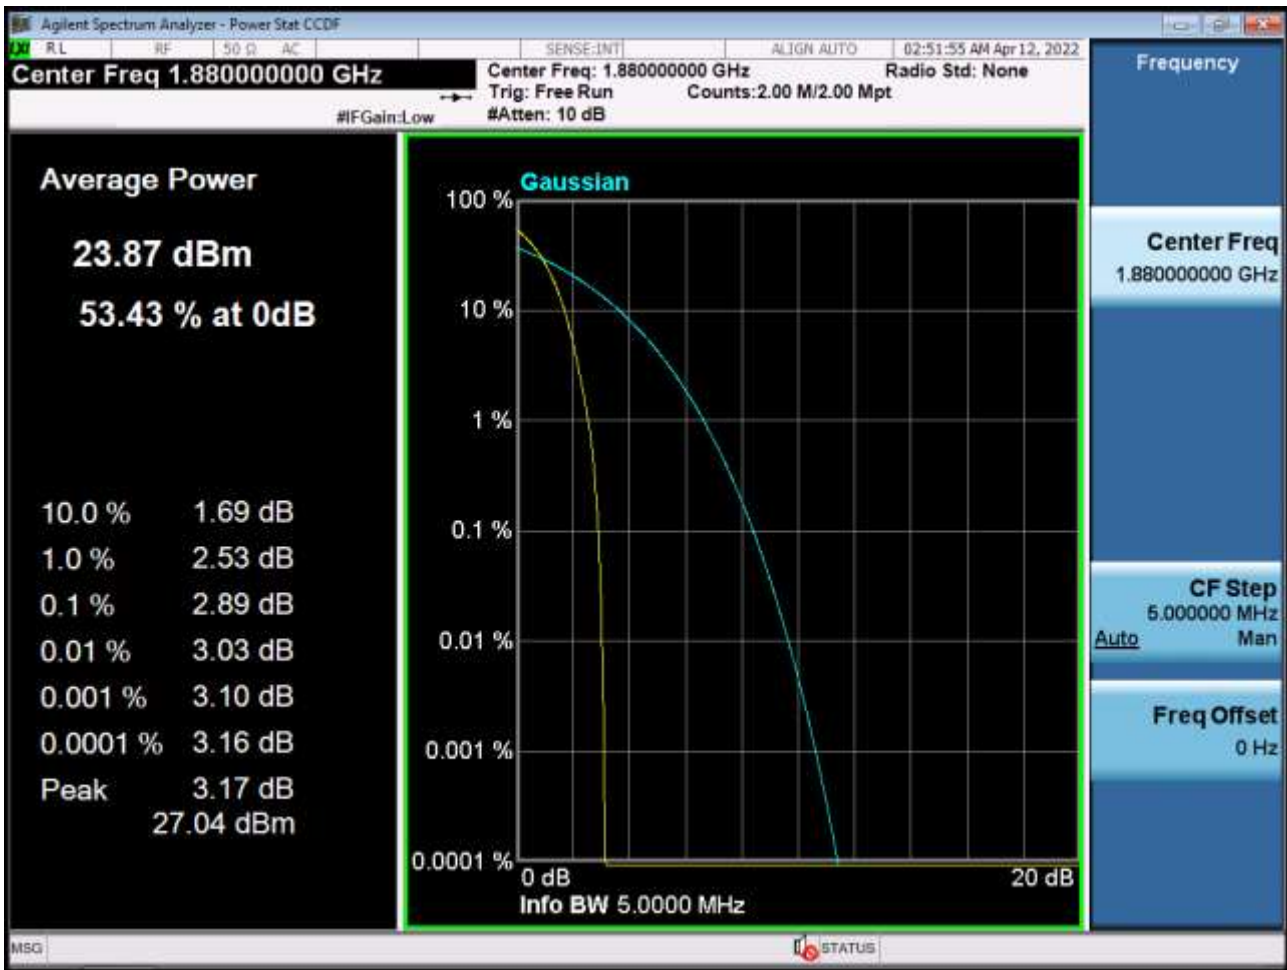


■ WCDMA1700 MODE (1412 CH.) Peak-to-Average Ratio

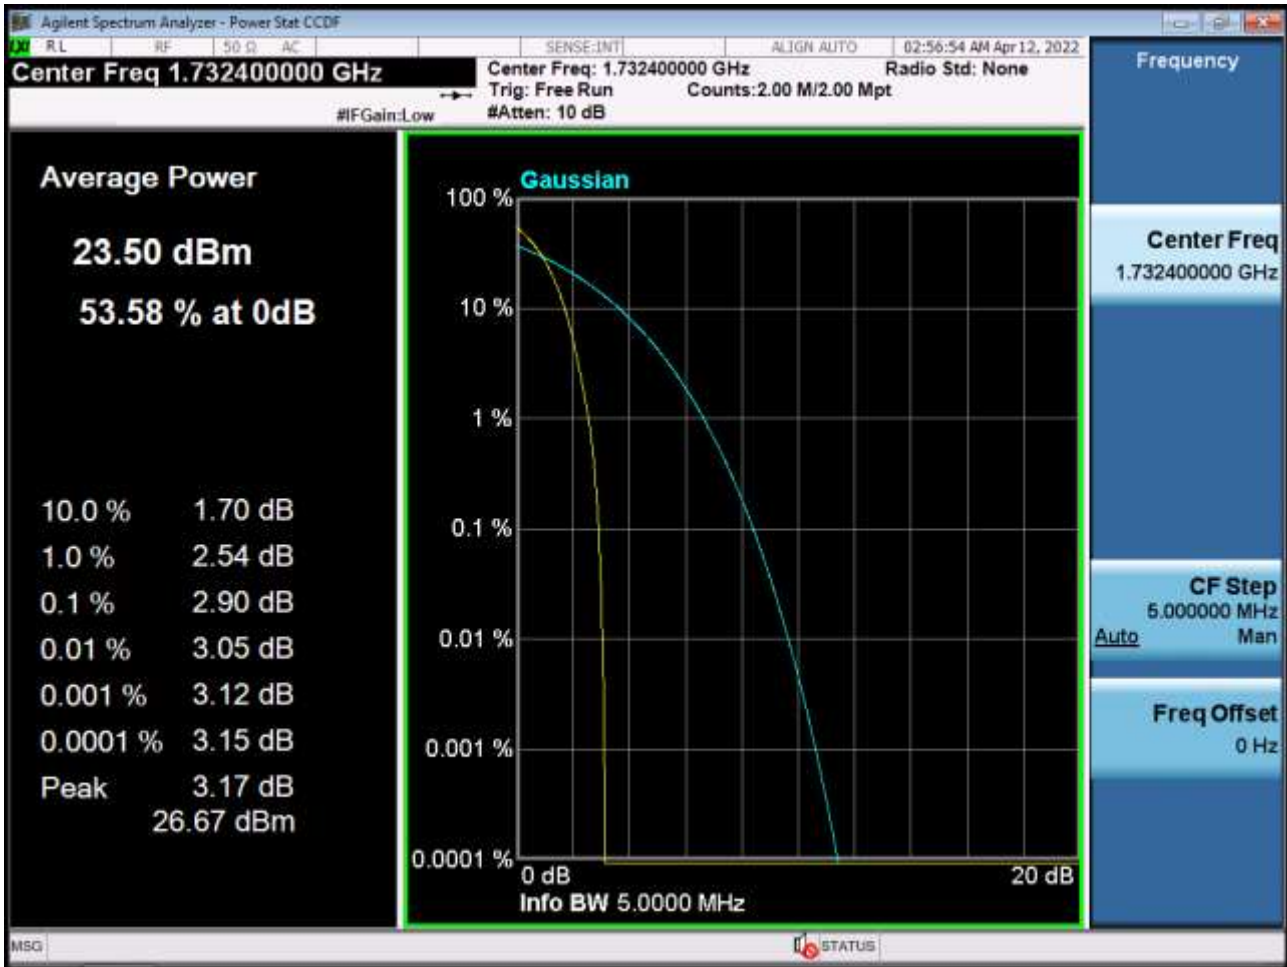


■ PCS CDMA MODE (600 CH.) Peak-to-Average Ratio

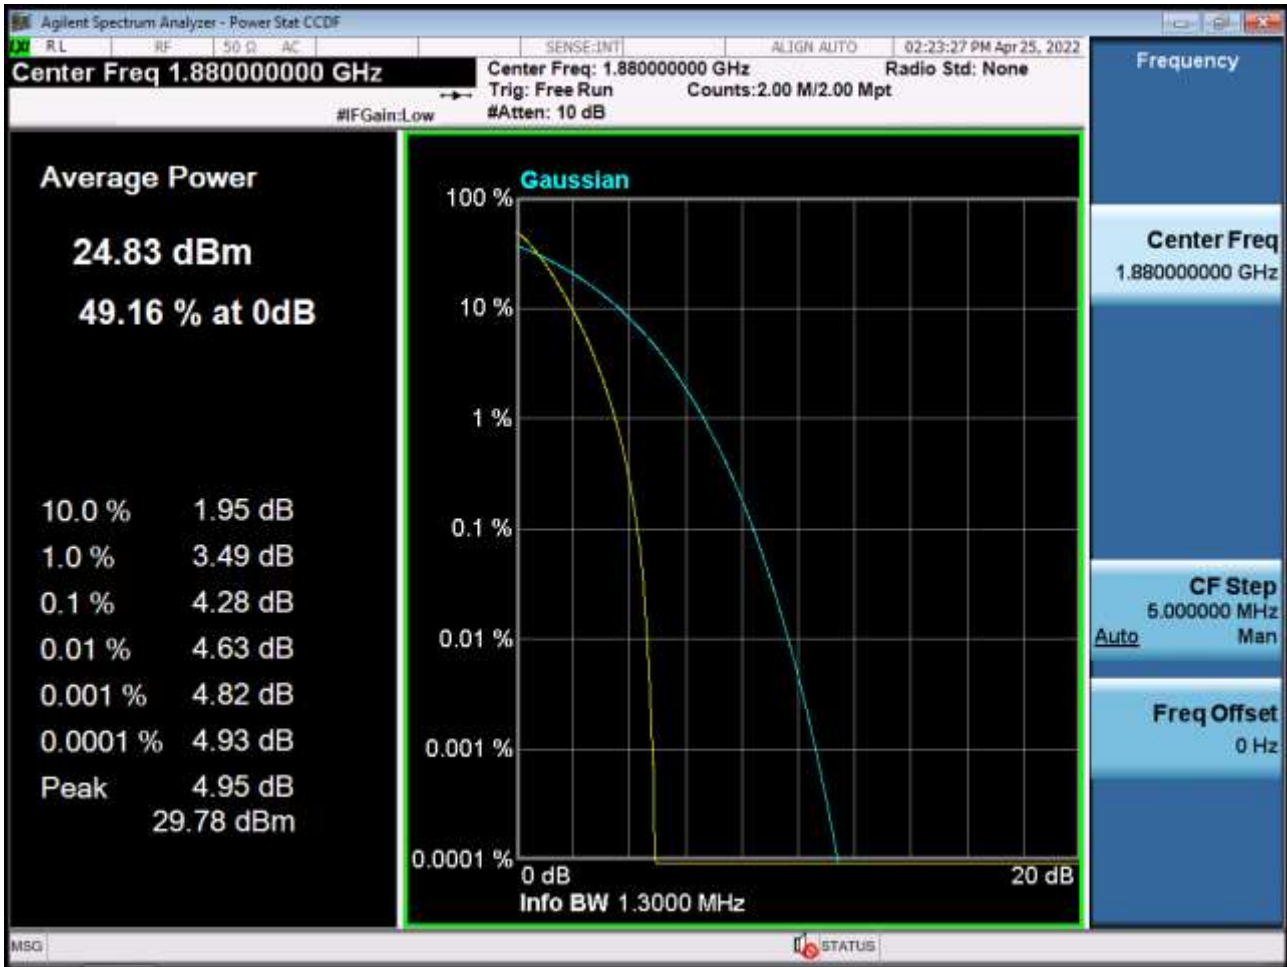

■ GSM850 MODE (128 CH.) Block Edge 1

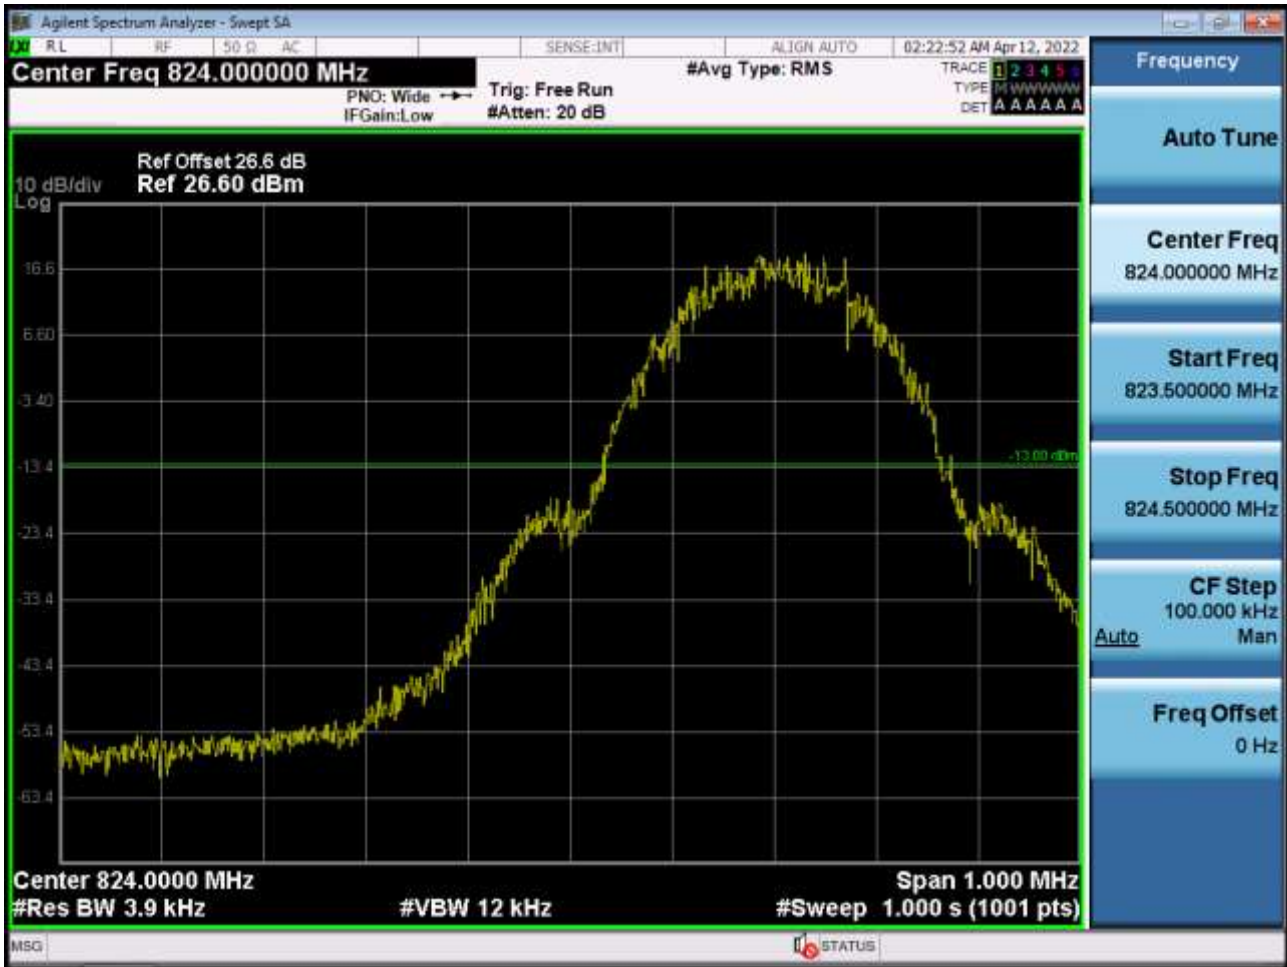


■ GSM850 MODE (128 CH.) Block Edge 2

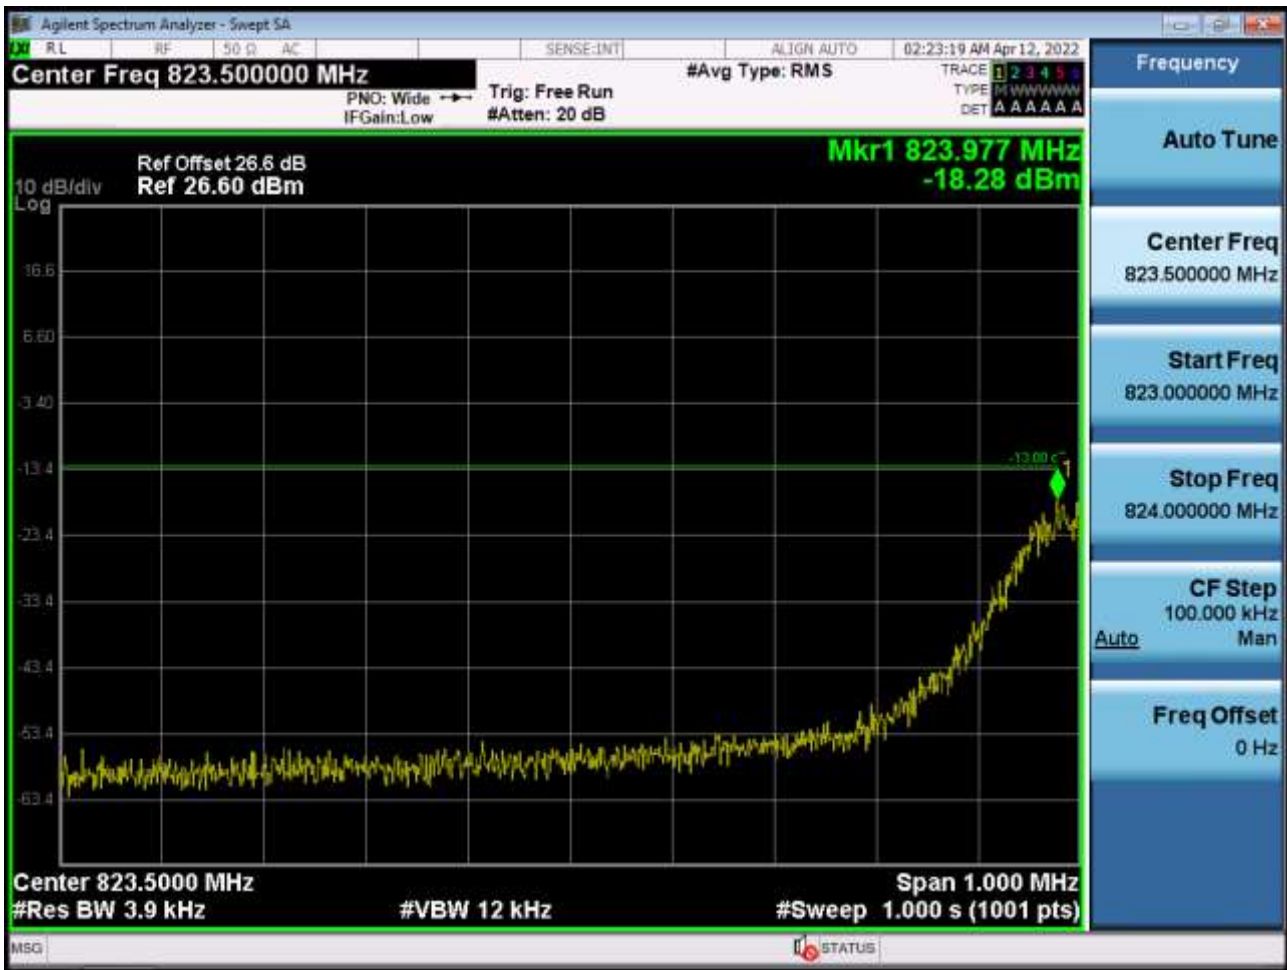


■ GSM850 MODE (128 CH.) Block Edge 3



■ GSM850 MODE (251 CH.) Block Edge 1

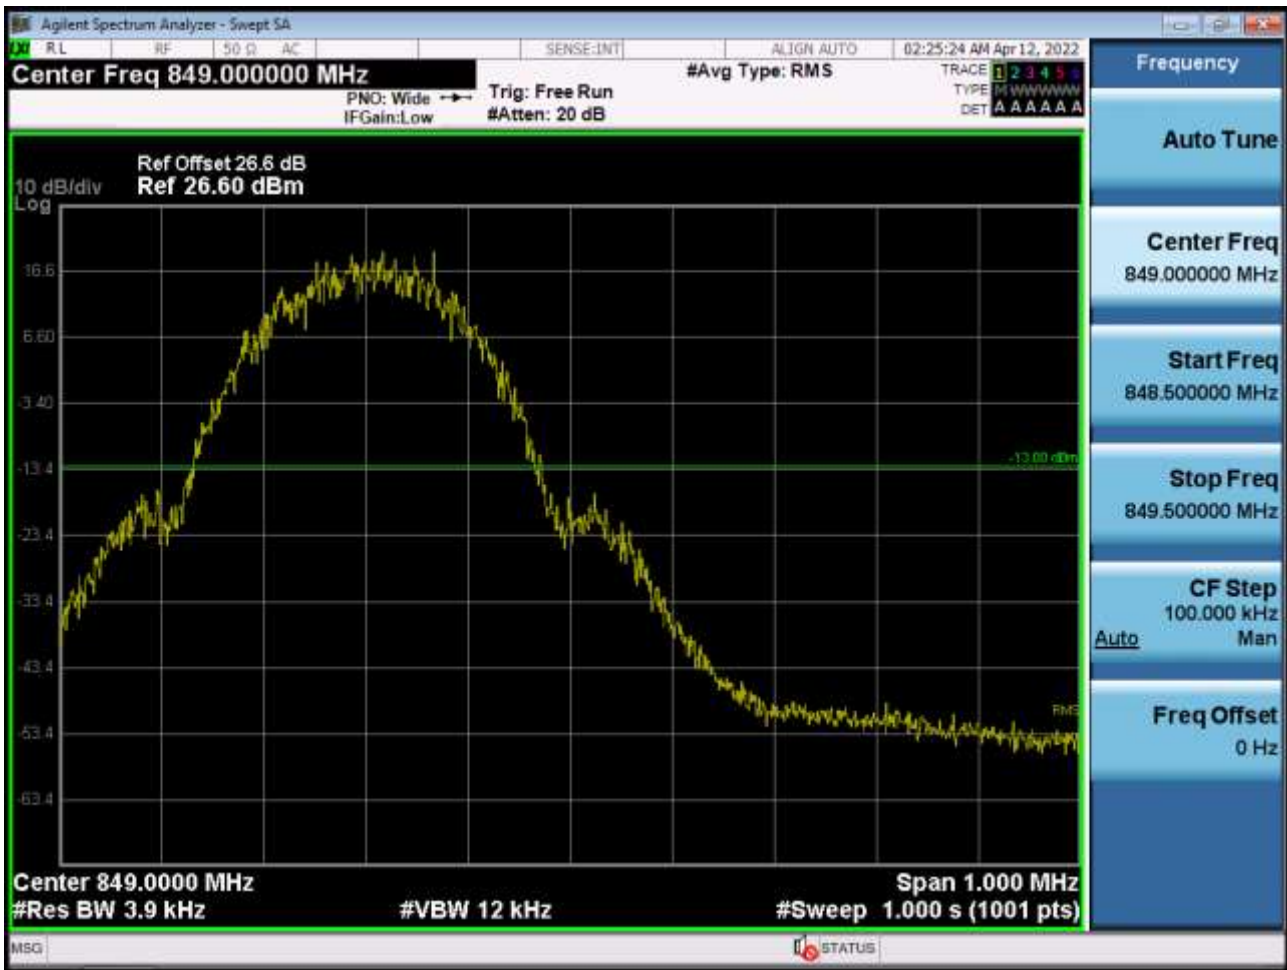


■ GSM850 MODE (251 CH.) Block Edge 2

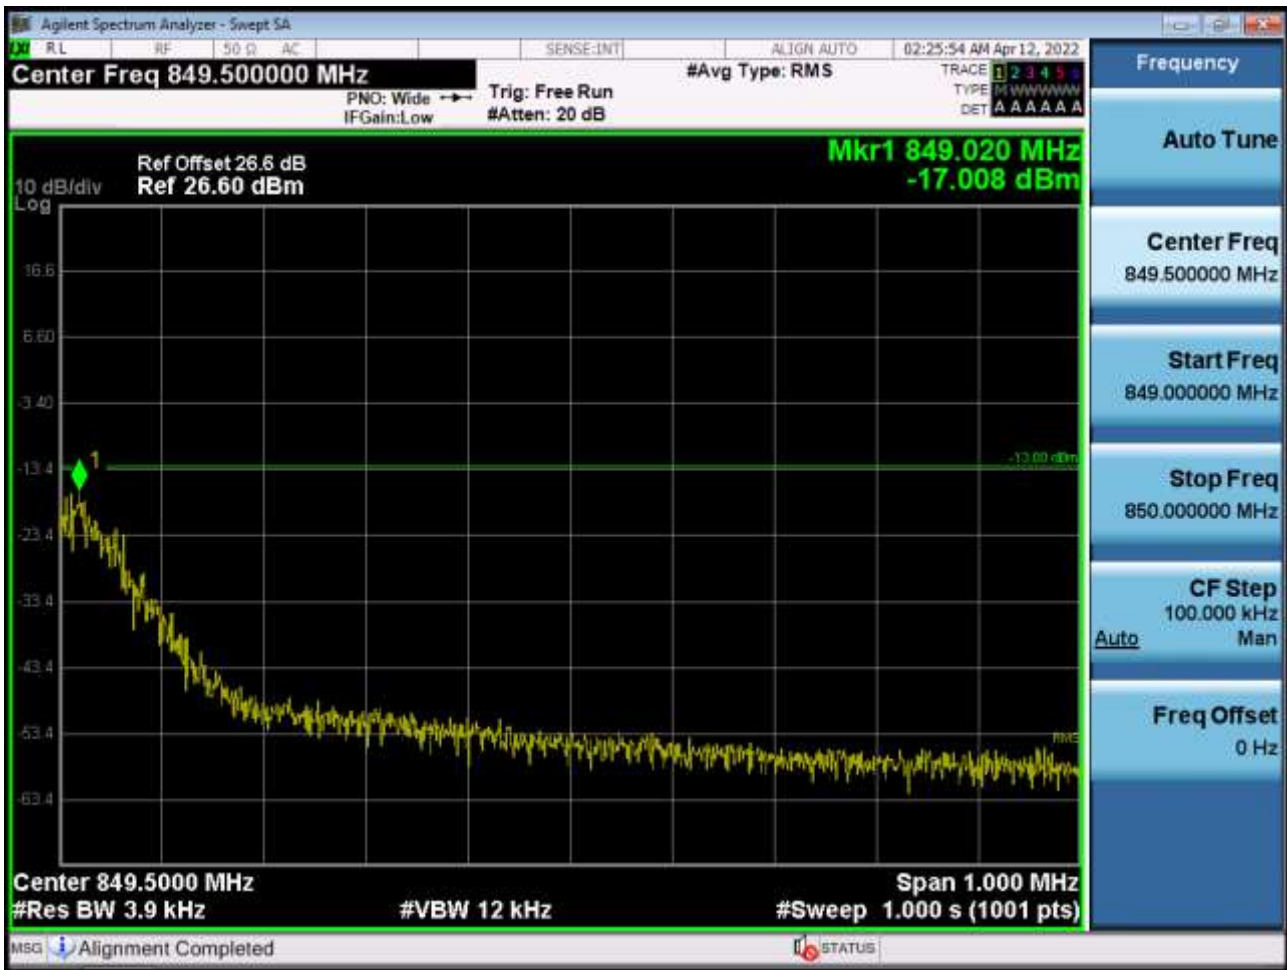


■ GSM850 MODE (251 CH.) Block Edge 3



■ EDGE MODE (128 CH.) Block Edge 1

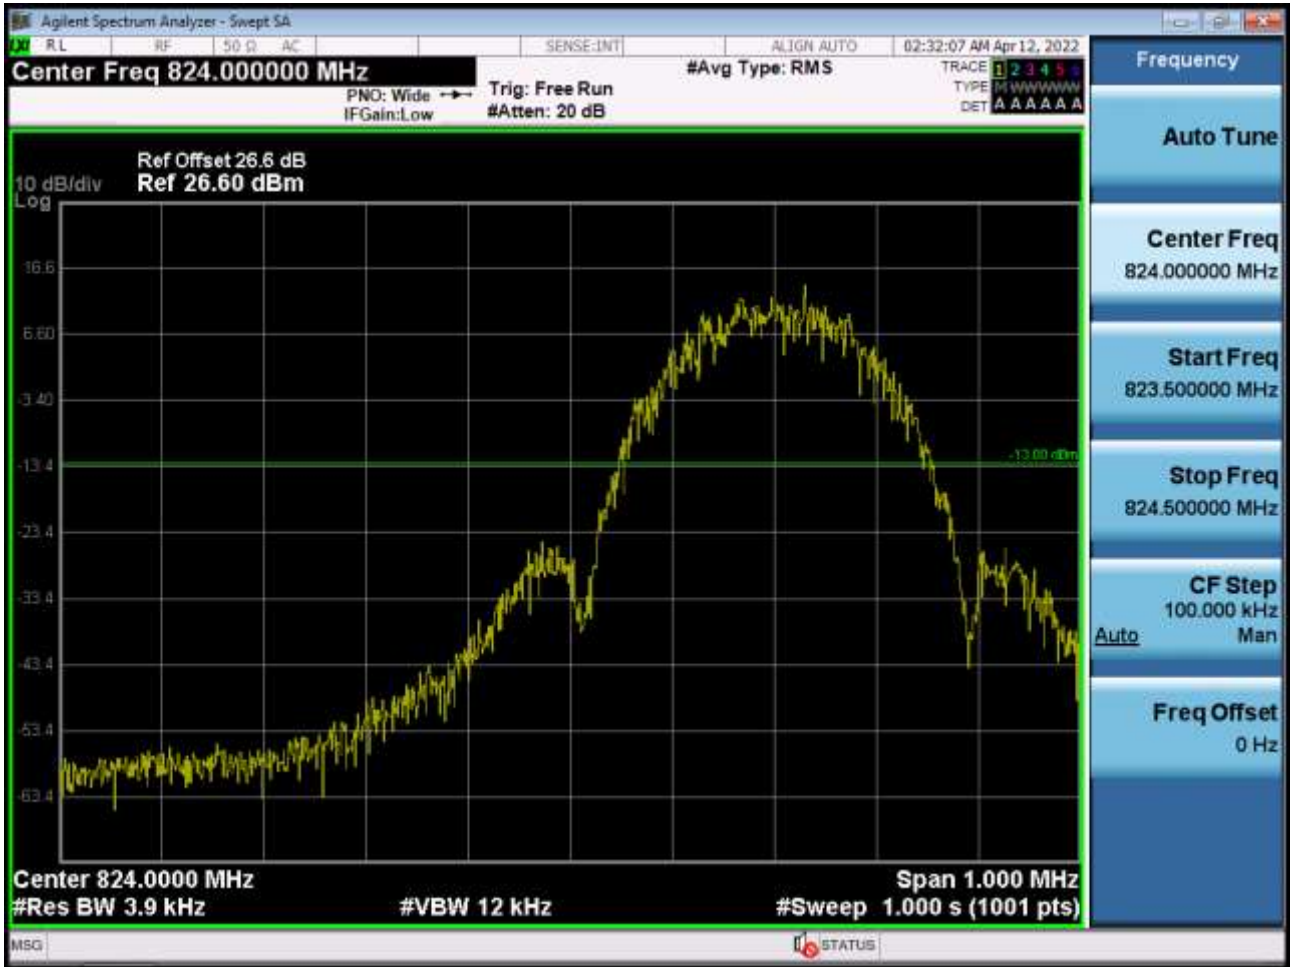

■ EDGE MODE (128 CH.) Block Edge 2

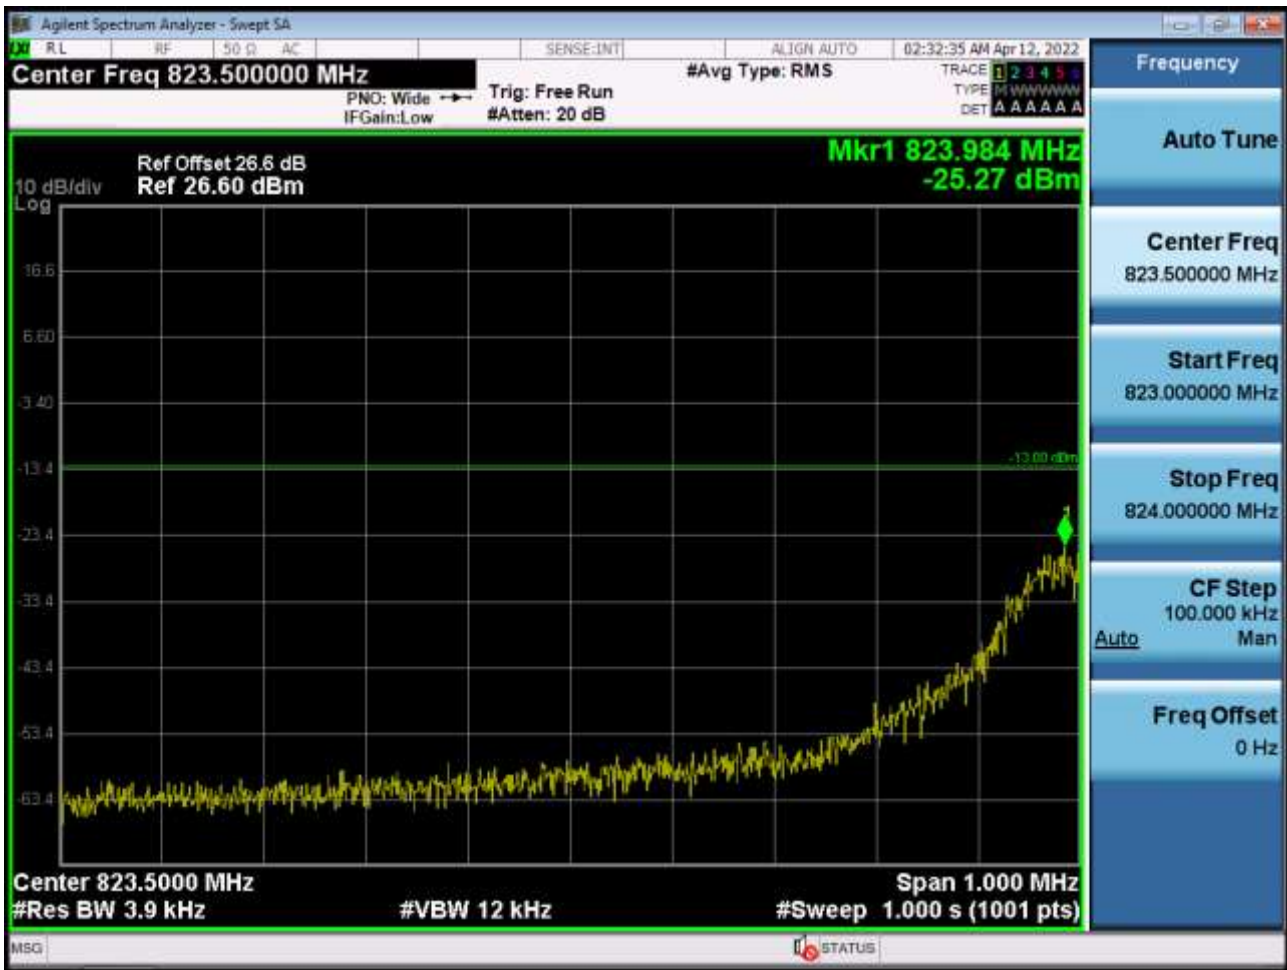


■ EDGE MODE (128 CH.) Block Edge 3



■ EDGE MODE (251 CH.) Block Edge 1




■ EDGE MODE (251 CH.) Block Edge 2

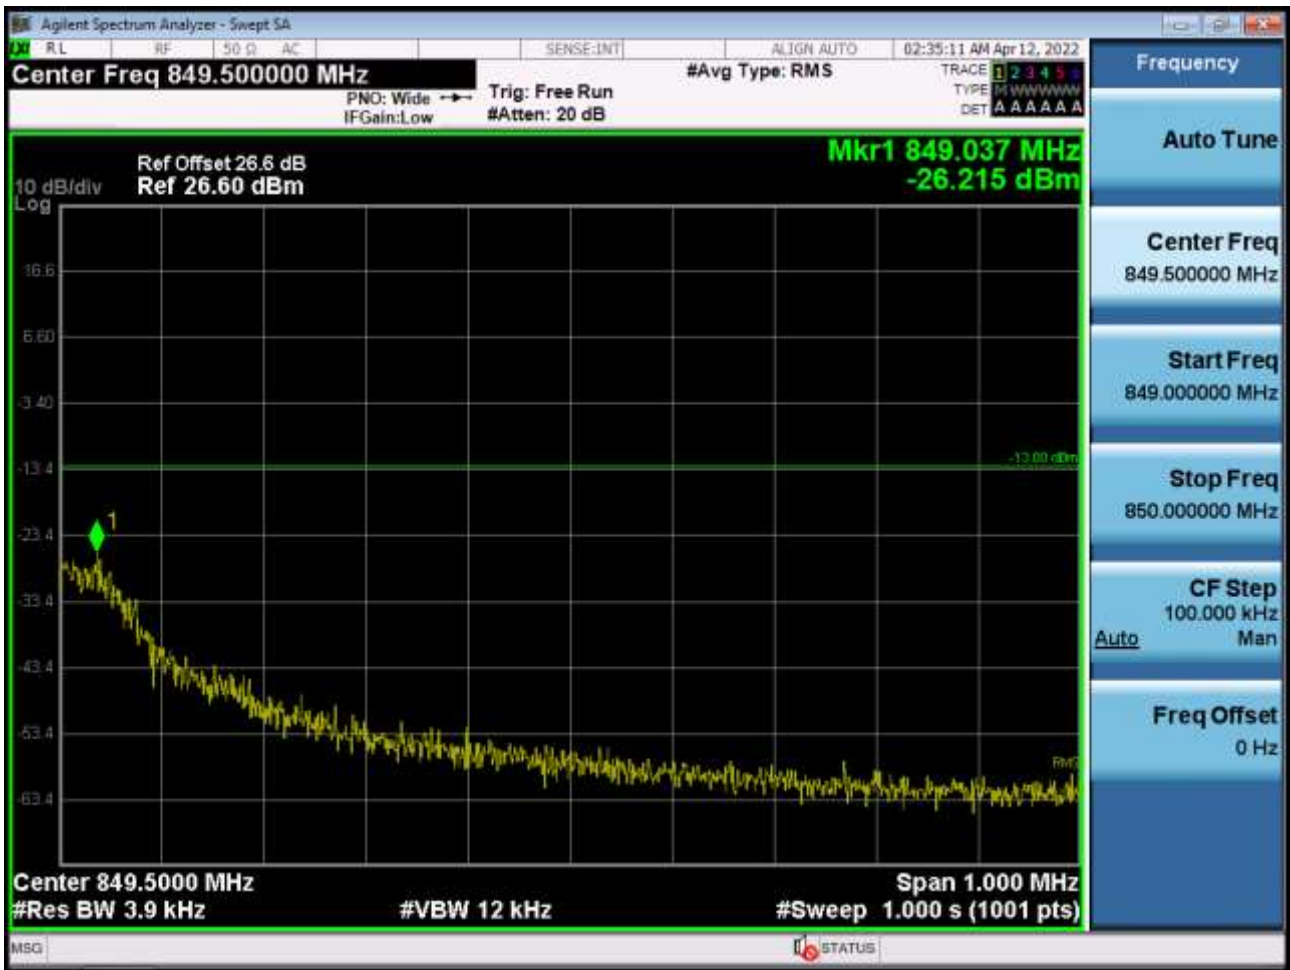


■ EDGE MODE (251 CH.) Block Edge 3



■ GSM1900 MODE (512 CH.) Block Edge 1

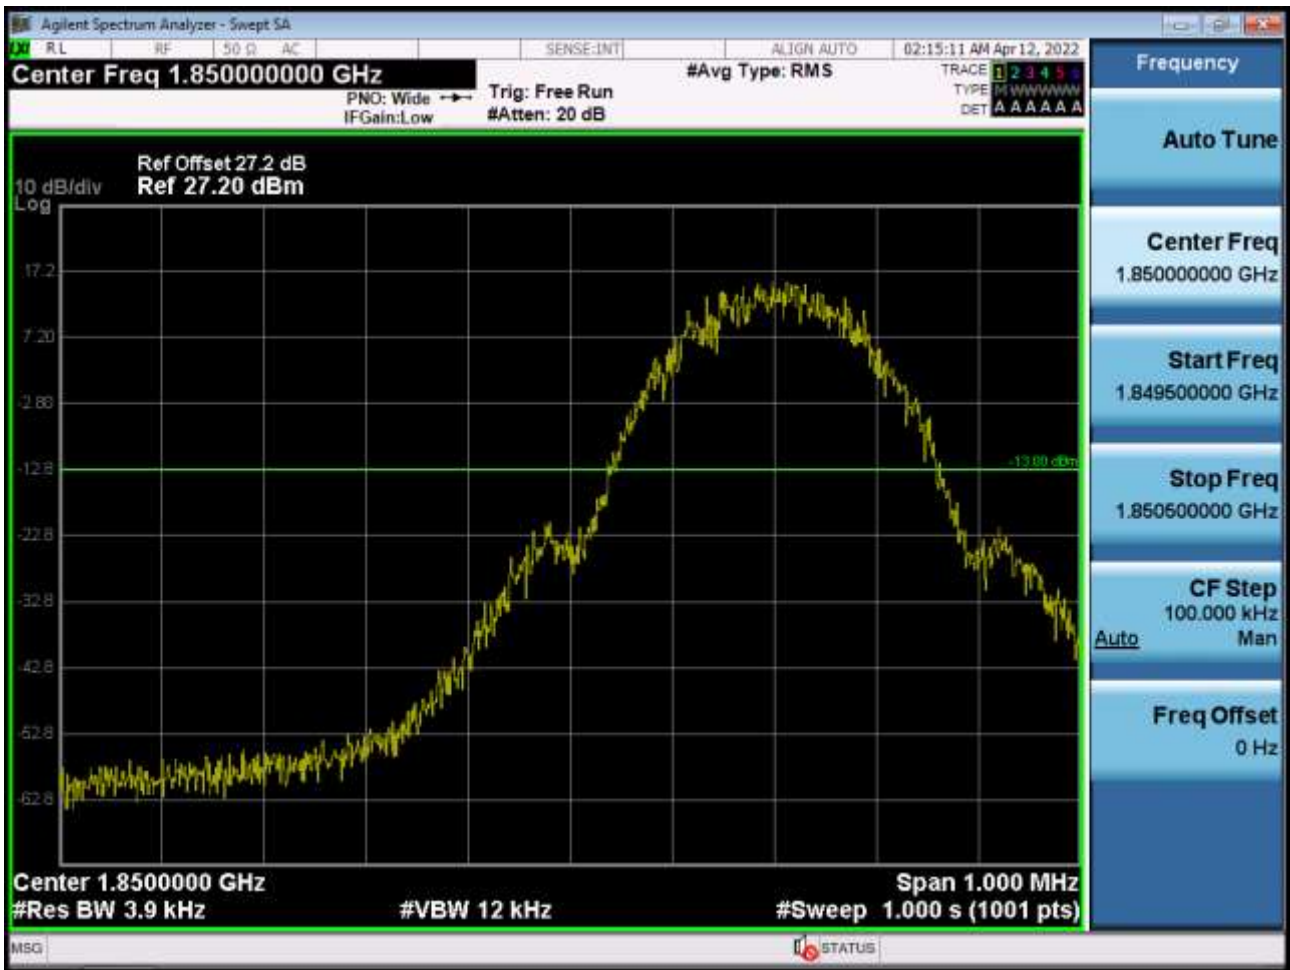

■ GSM1900 MODE (512 CH.) Block Edge 2

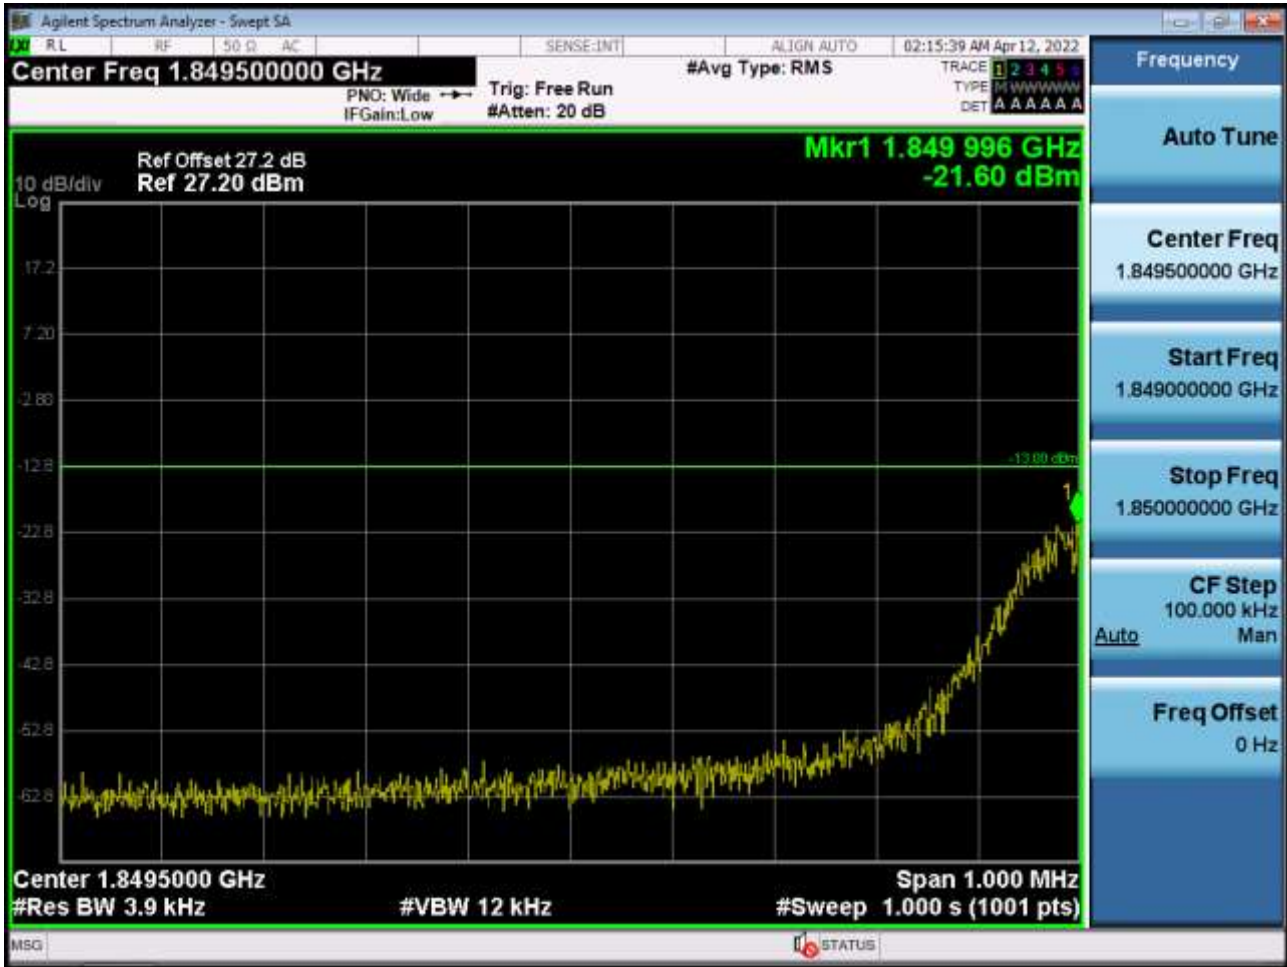

■ GSM1900 MODE (512 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -49.53 dBm + 10 dB = -39.53 dBm

■ GSM1900 MODE (810 CH.) Block Edge 1



■ GSM1900 MODE (810 CH.) Block Edge 2

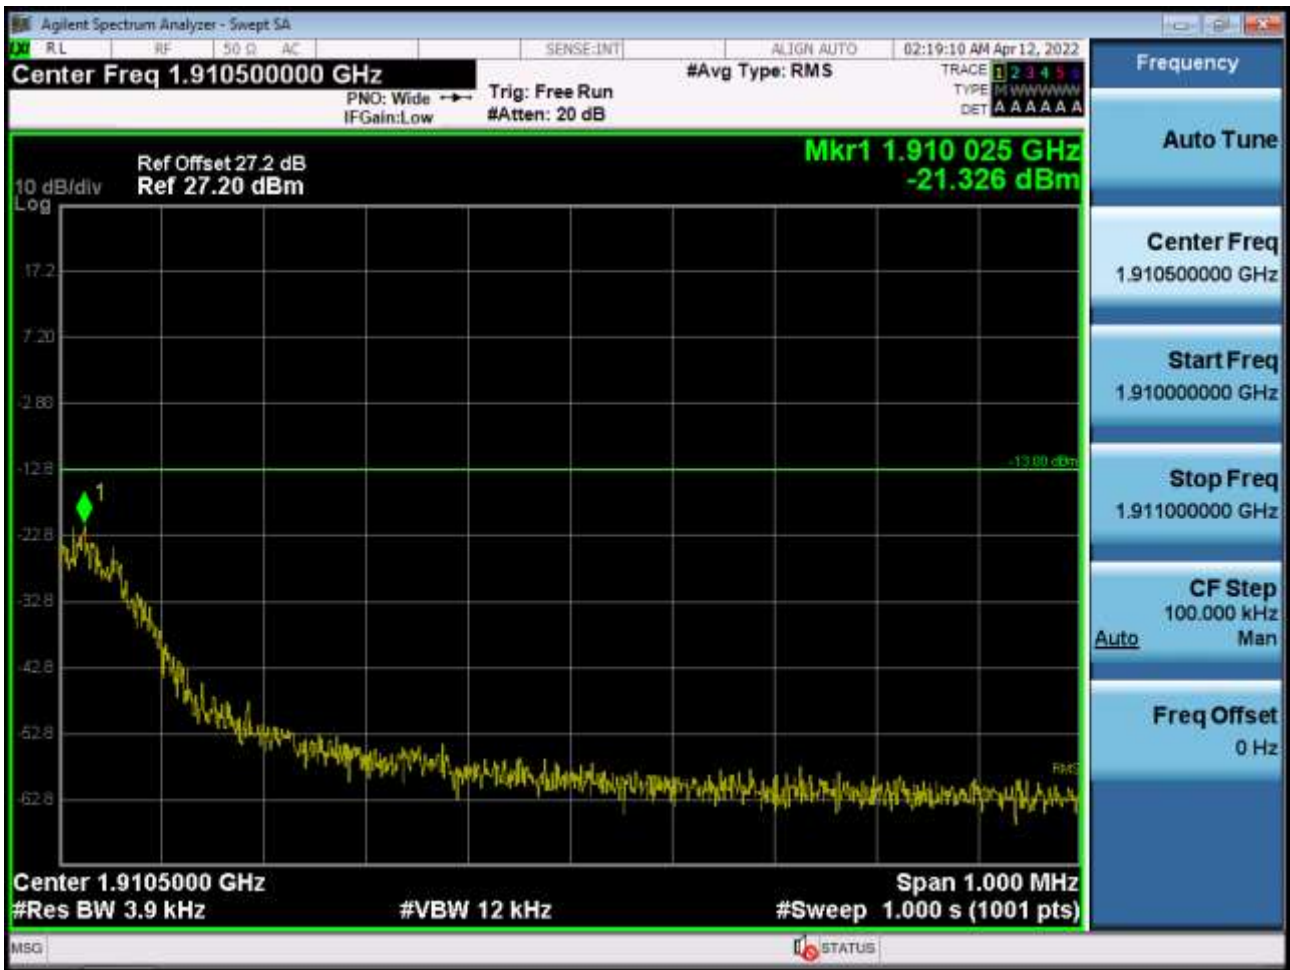


■ GSM1900 MODE (810 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -48.873 dBm + 10 dB = -39.872 dBm

■ EDGE MODE (512 CH.) Block Edge 1

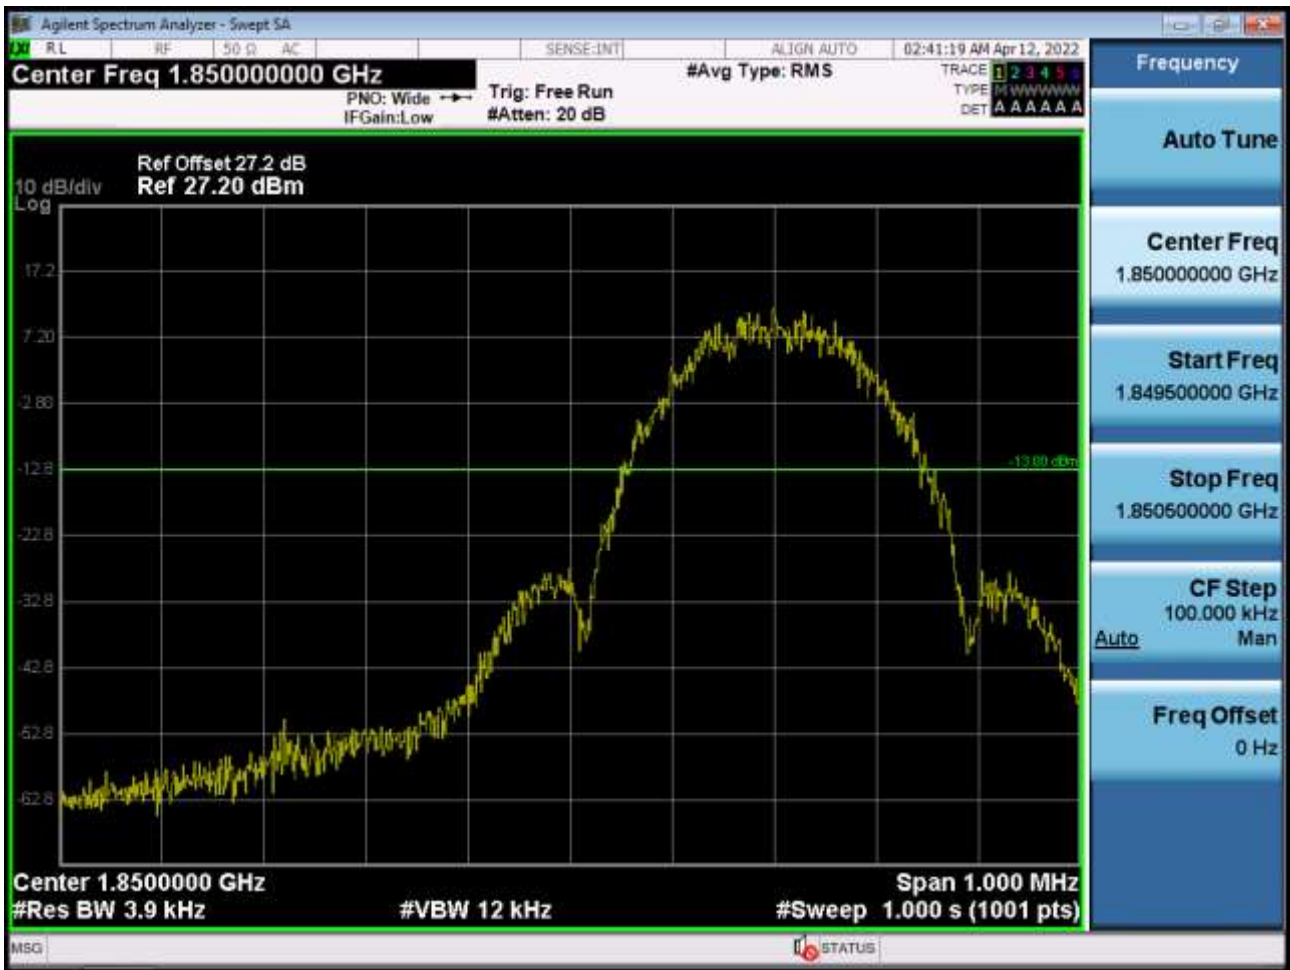

■ EDGE MODE (512 CH.) Block Edge 2

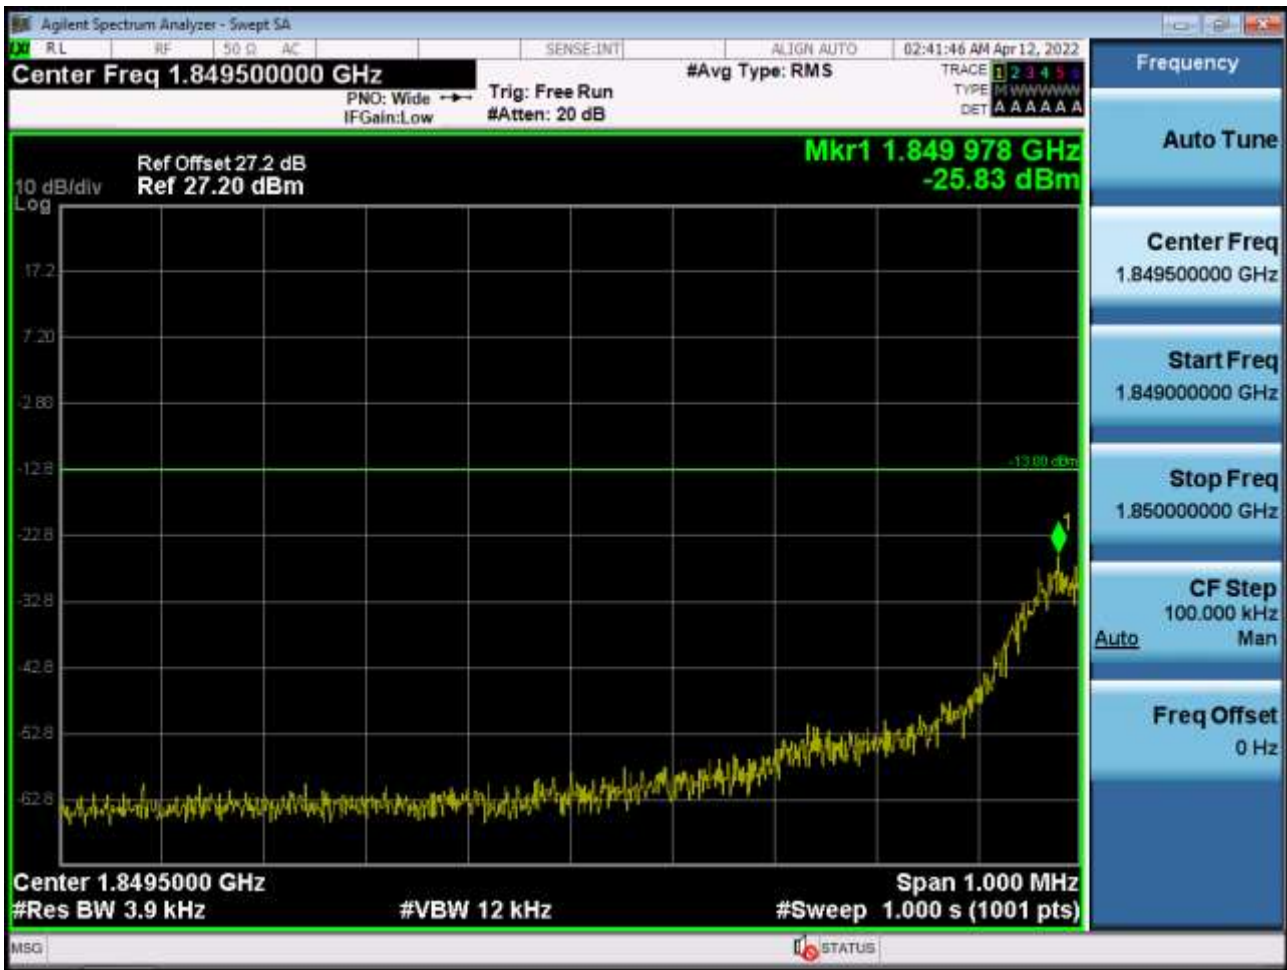

■ EDGE MODE (512 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -50.63 dBm + 10 dB = -40.63 dBm

■ EDGE MODE (810 CH.) Block Edge 1



■ EDGE MODE (810 CH.) Block Edge 2

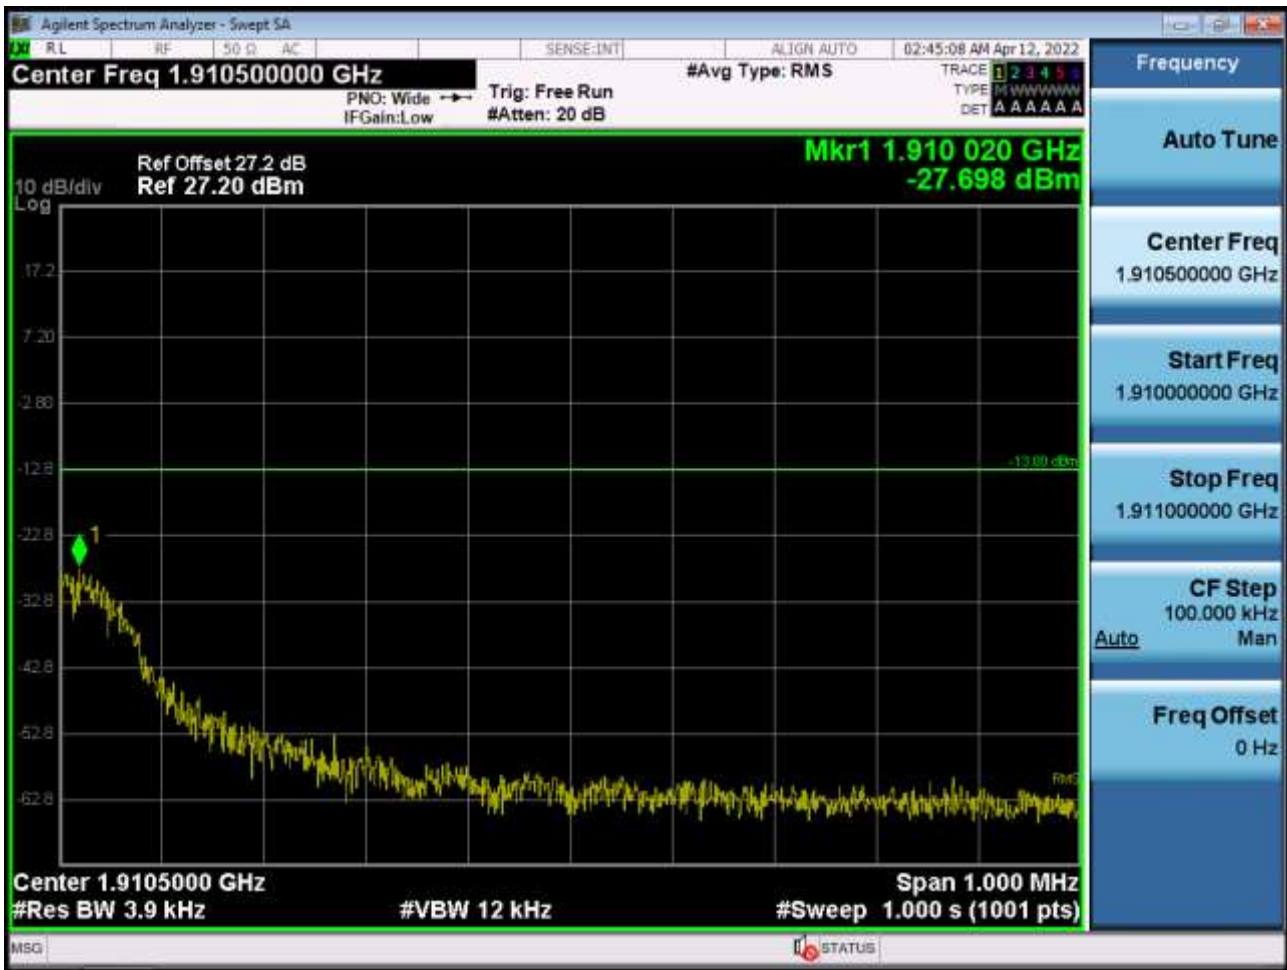

■ EDGE MODE (810 CH.) Block Edge 3



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -50.058 dBm + 10 dB = -40.058 dBm

■ WCDMA850 MODE (4132 CH.) Block Edge



■ WCDMA850 MODE (4132 CH.) – 4 MHz Span



■ WCDMA850MODE (4233 CH.) Block Edge



■ WCDMA850MODE (4233 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9262 CH.) Block Edge



■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9538 CH.) Block Edge



■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span



■ WCDMA1700 MODE (1312 CH.) Block Edge



■ WCDMA1700 MODE (1312 CH.) – 4 MHz Span




■ WCDMA1700 MODE (1513 CH.) Block Edge



■ WCDMA1700 MODE (1513 CH.) – 4 MHz Span



■ CDMA Secondary800 MODE (476 CH.) Block Edge

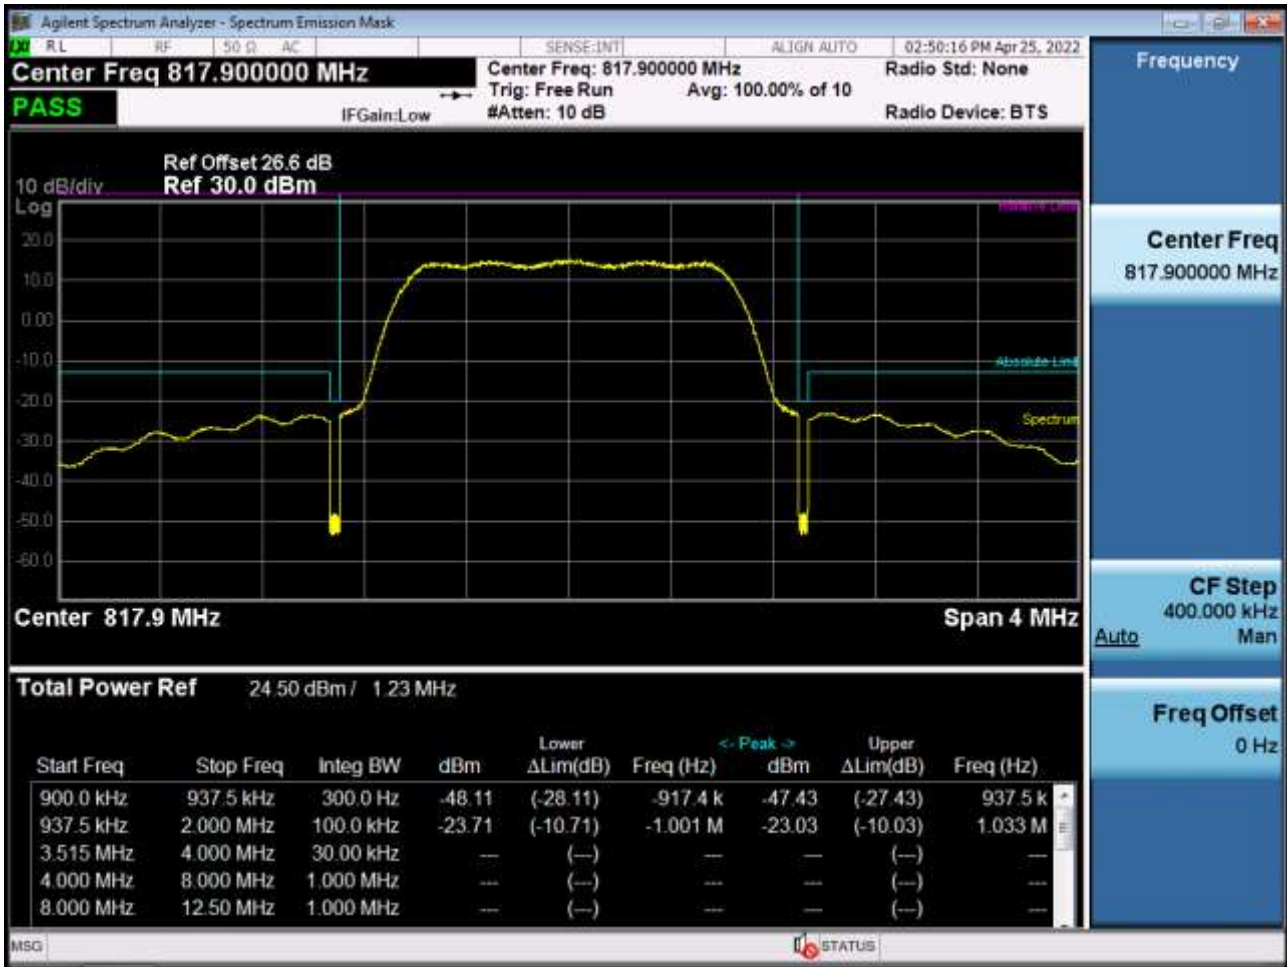

■ CDMA Secondary800 MODE (684 CH.) Block Edge



■ CDMA850 MODE (1013 CH.) Block Edge



■ CDMA850 MODE (1013 CH.) 4 MHz Span



■ CDMA850 MODE (777 CH.) Block Edge_1



■ CDMA850 MODE (777 CH.) Block Edge_2



■ CDMA850 MODE (777 CH.) 4 MHz Span



■ CDMA PCS MODE (25 CH.) Block Edge pan



■ CDMA PCS MODE (25 CH.) 4 MHz Span




■ CDMA PCS MODE (1175 CH.) Block Edge




■ CDMA PCS MODE (1175 CH.) 4 MHz Span




■ GSM850 MODE (128 CH.) Conducted Spurious Emissions

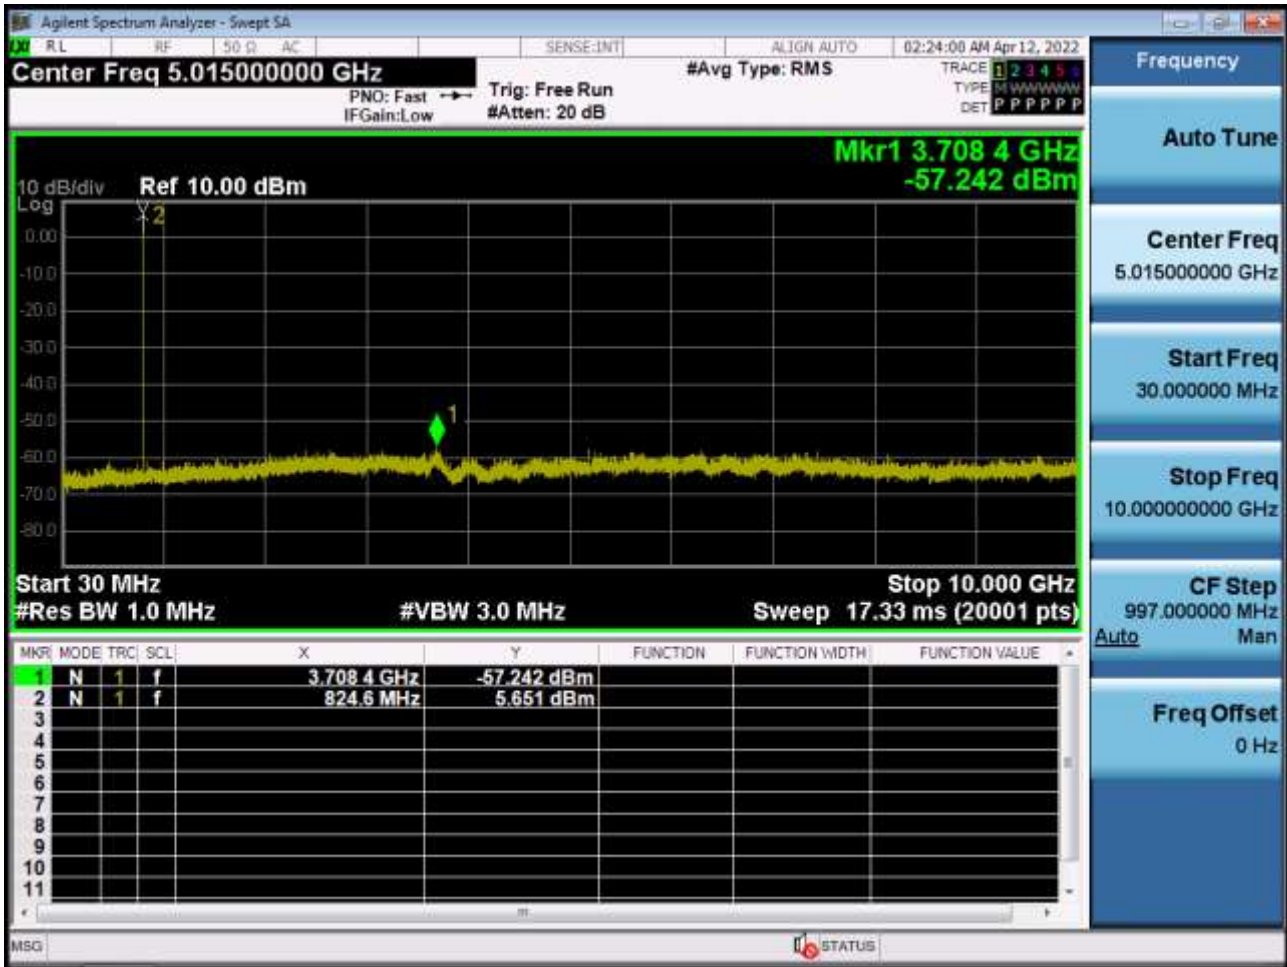


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions

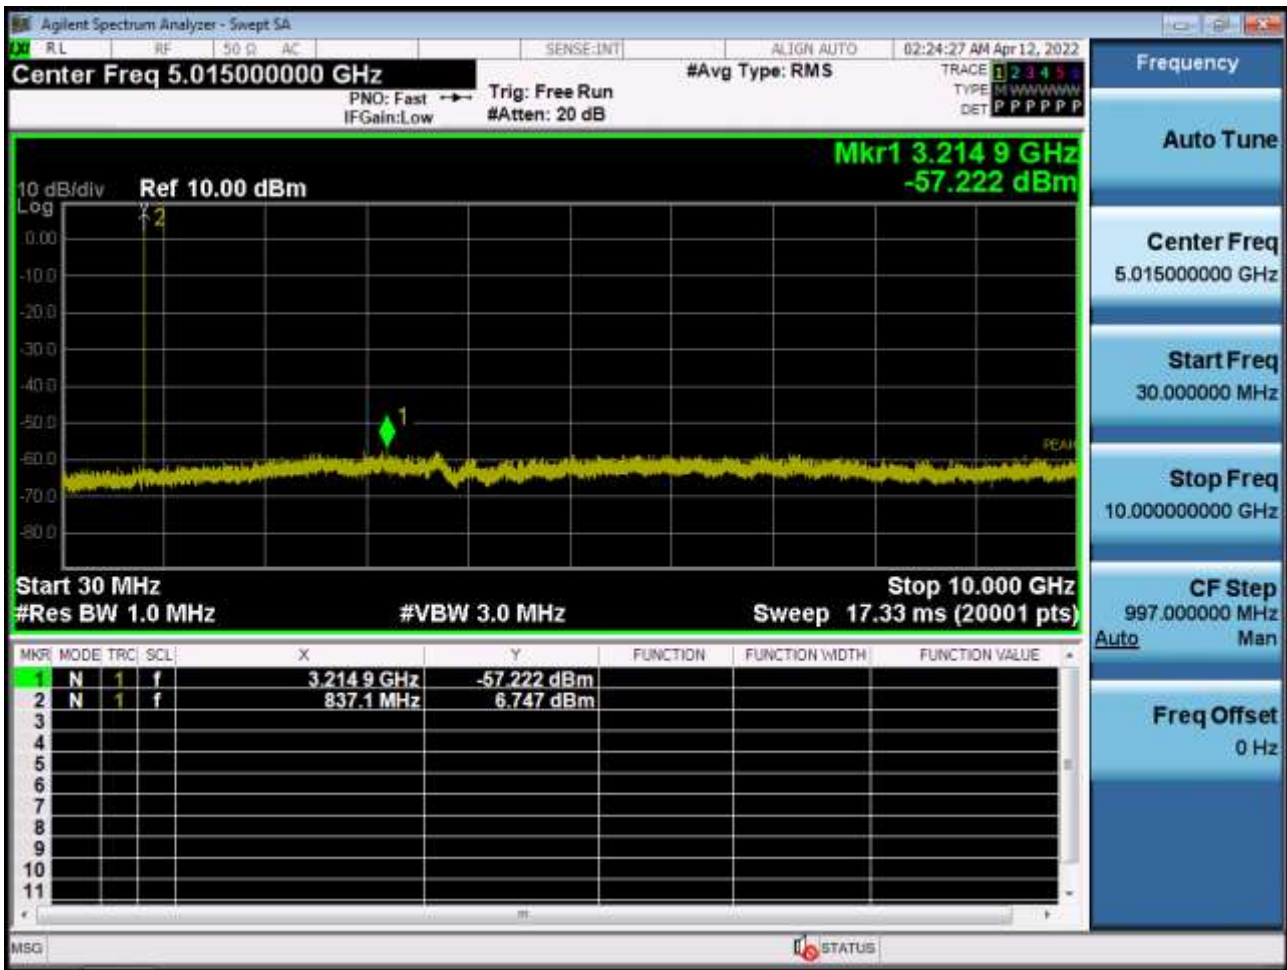


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions

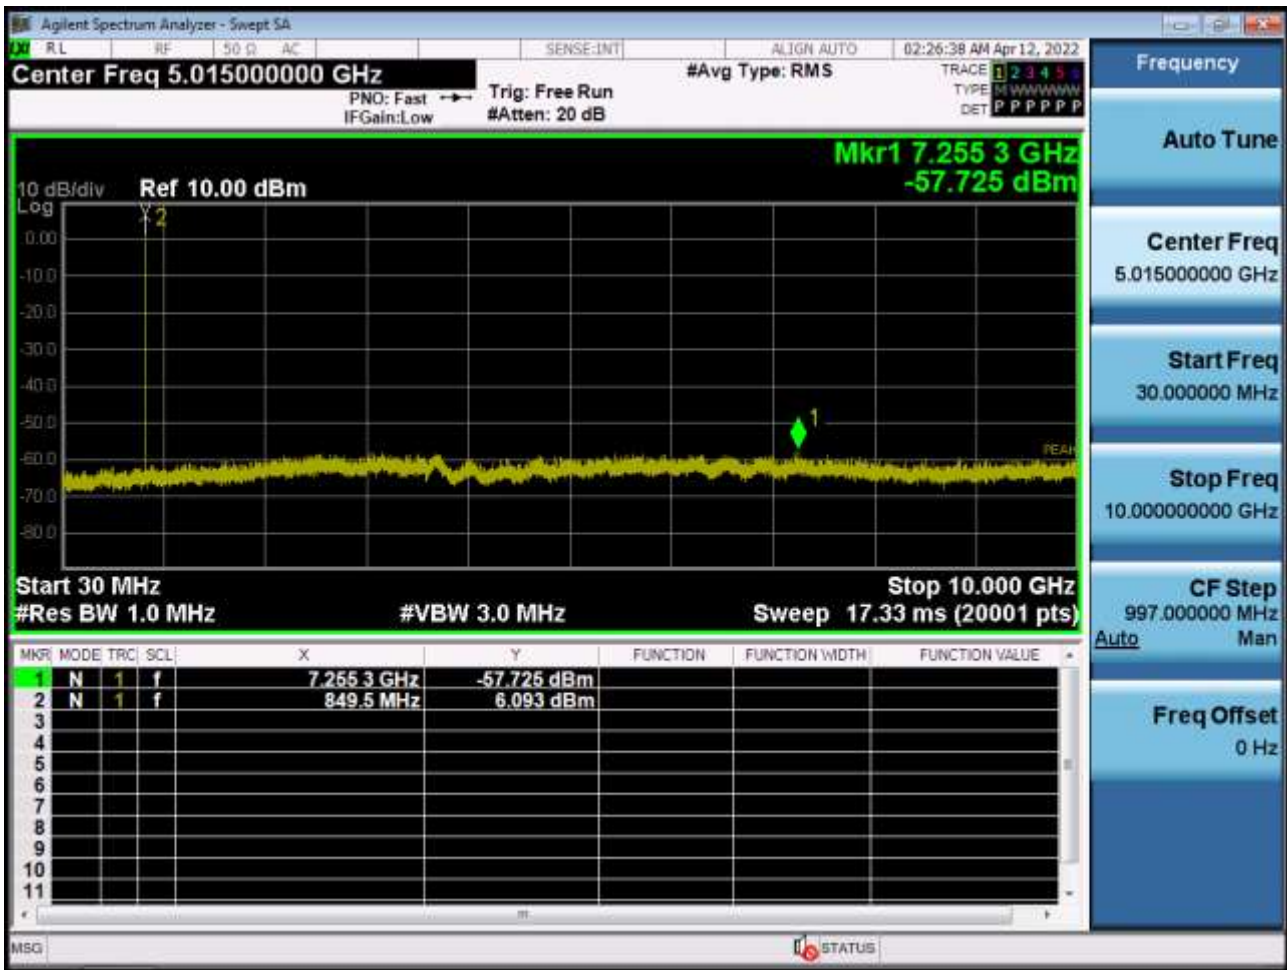


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

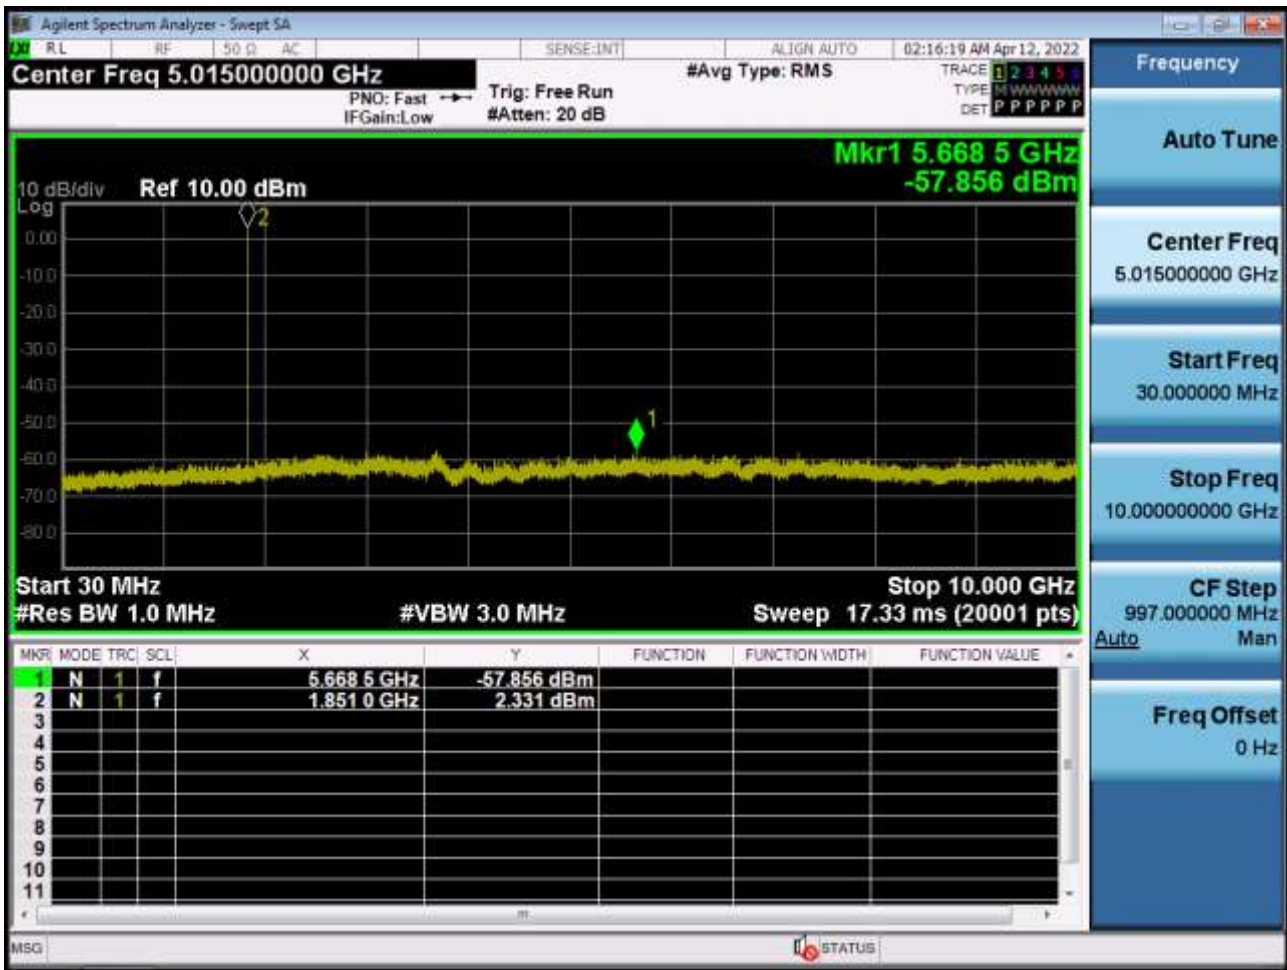


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

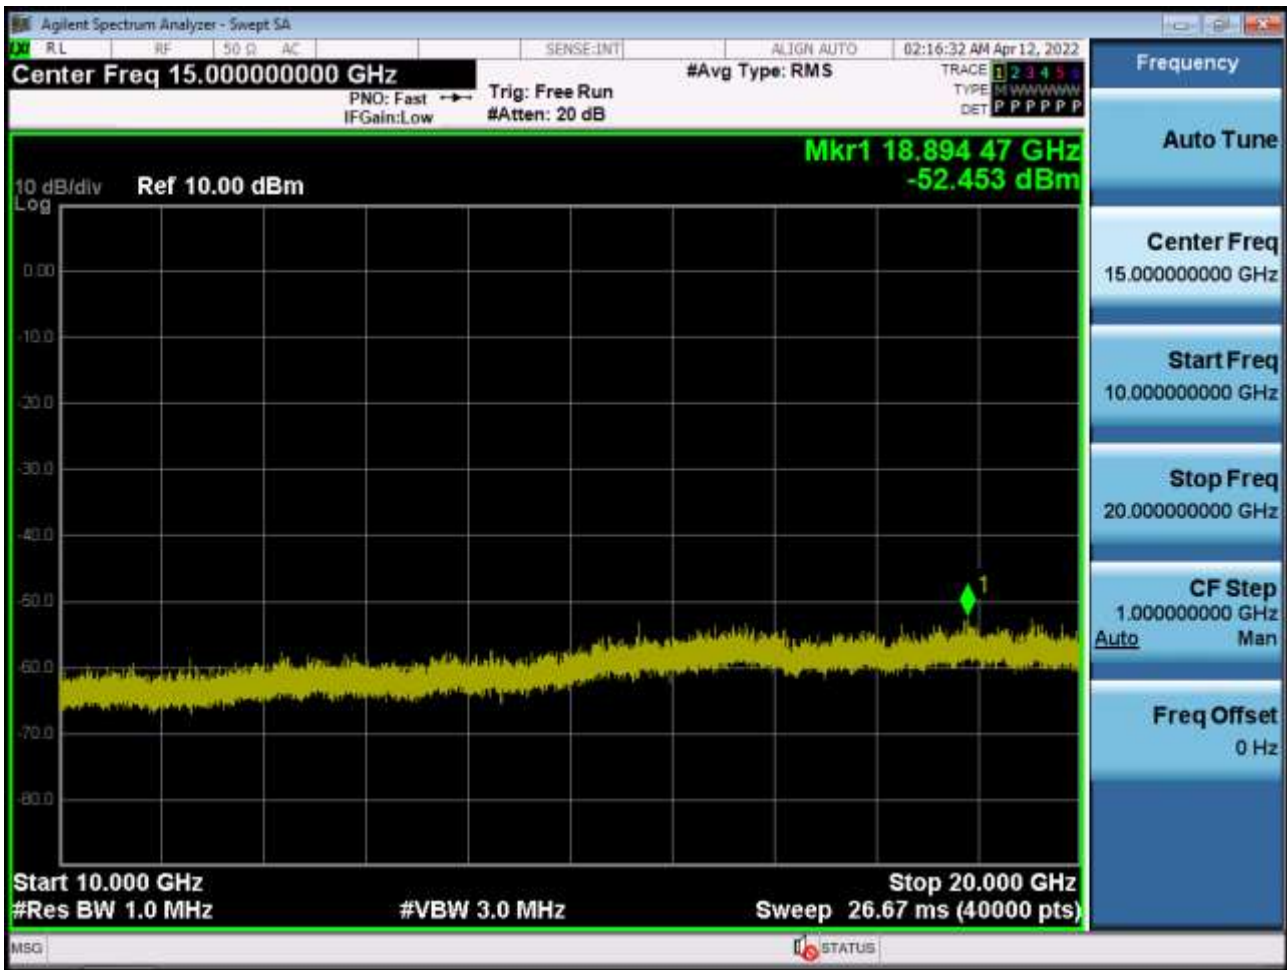


■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

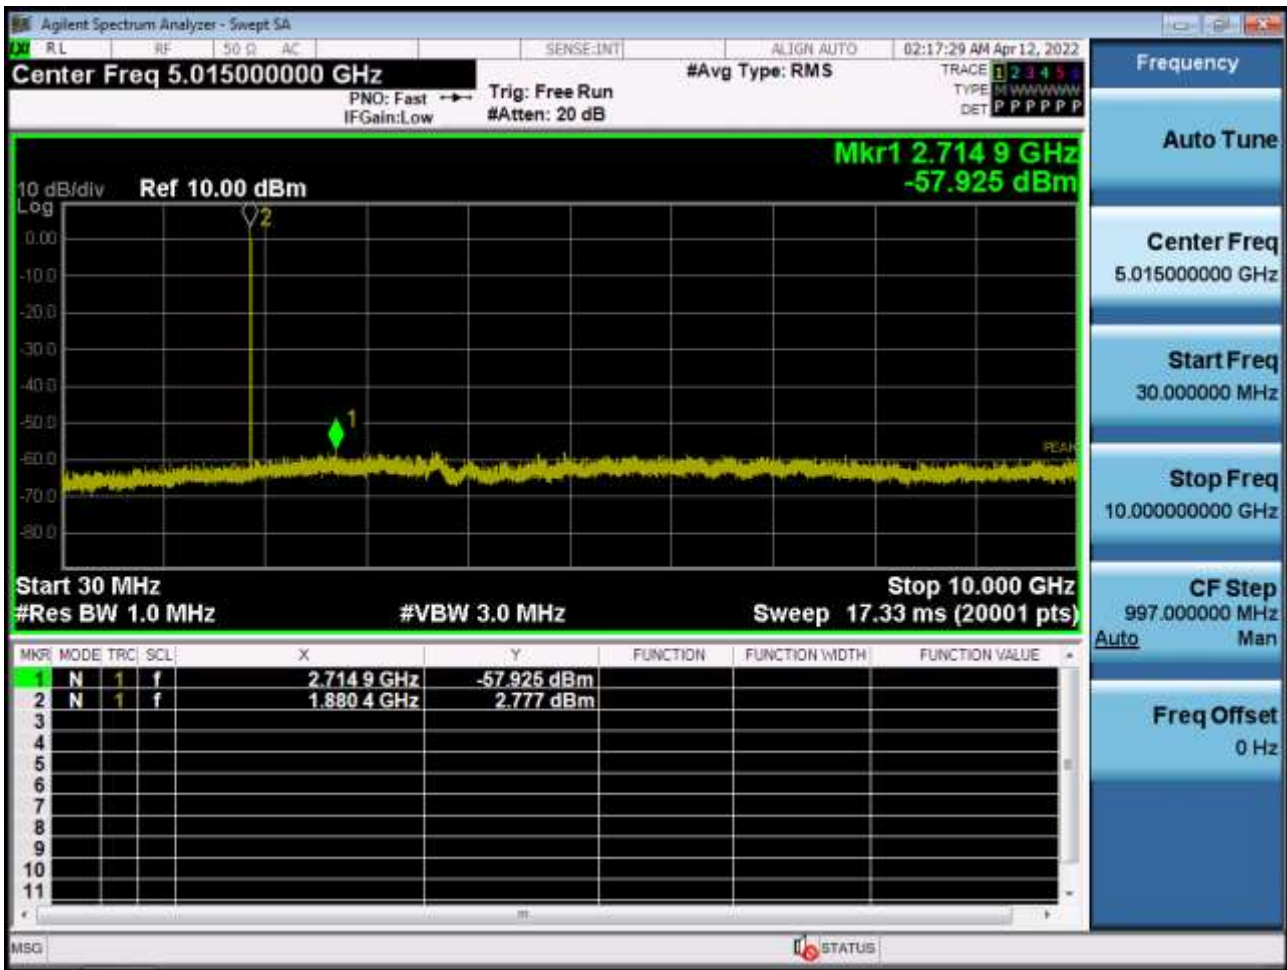


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

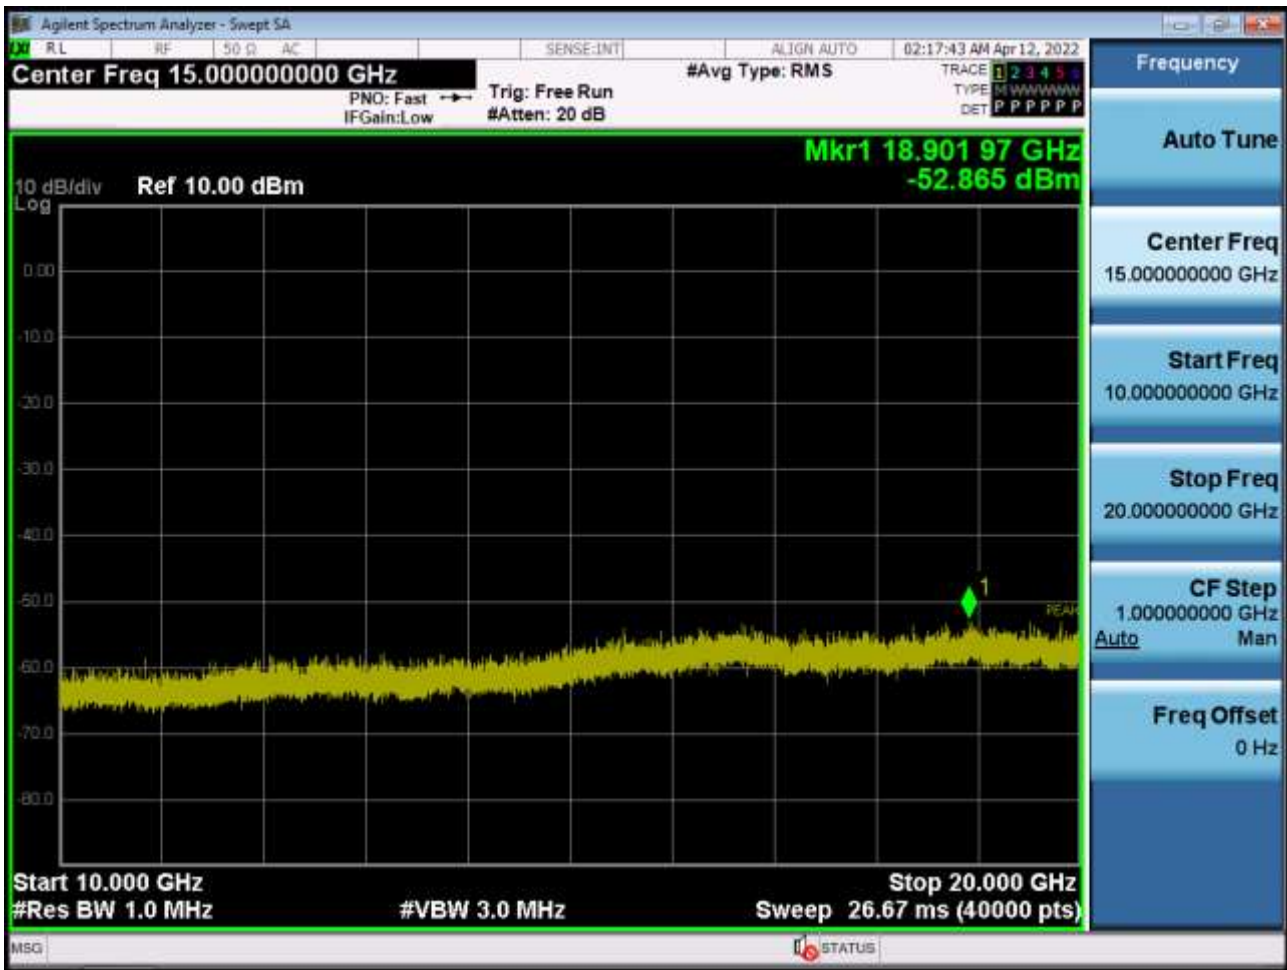


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

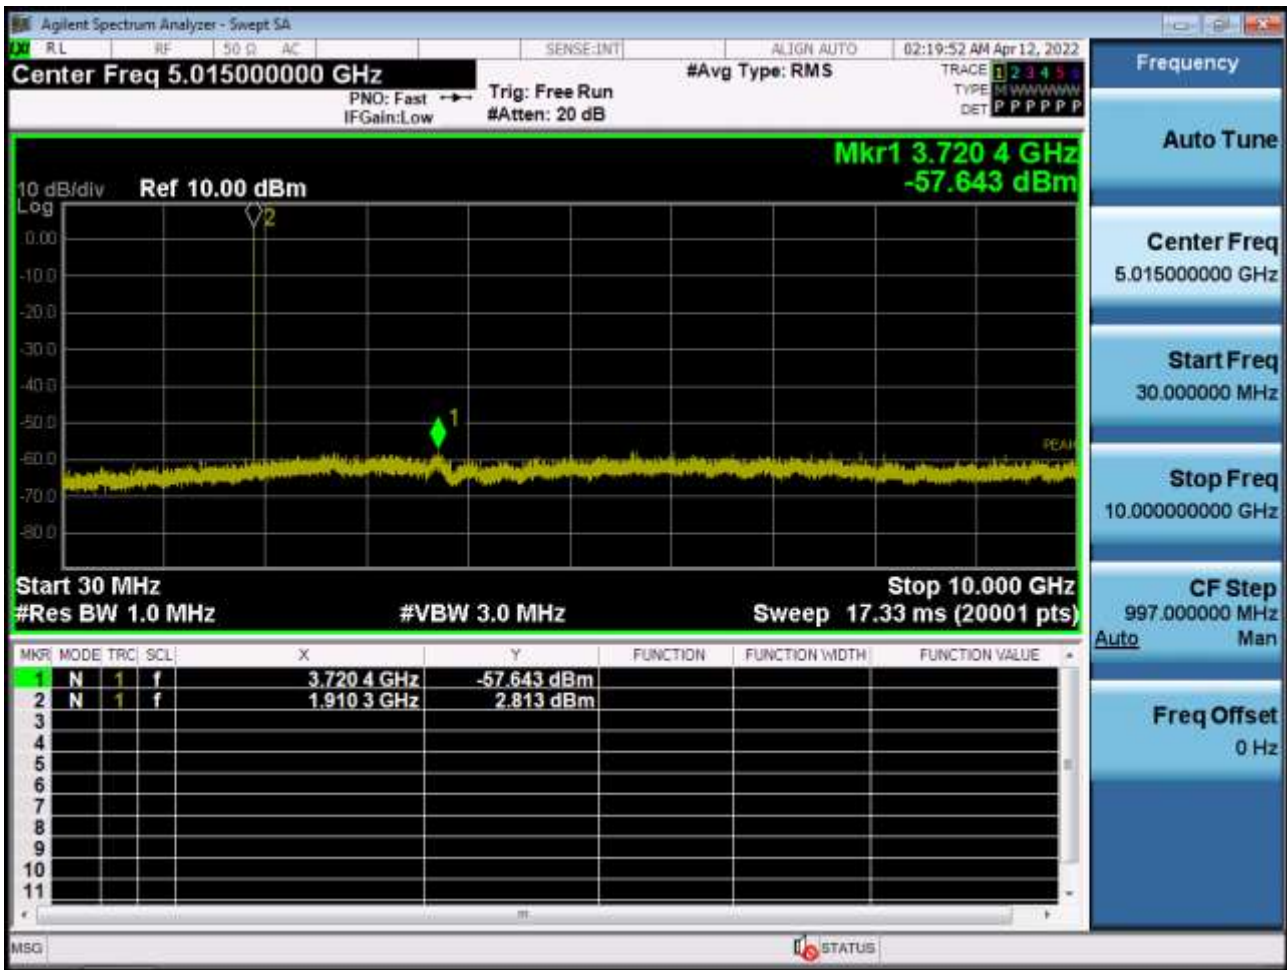


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

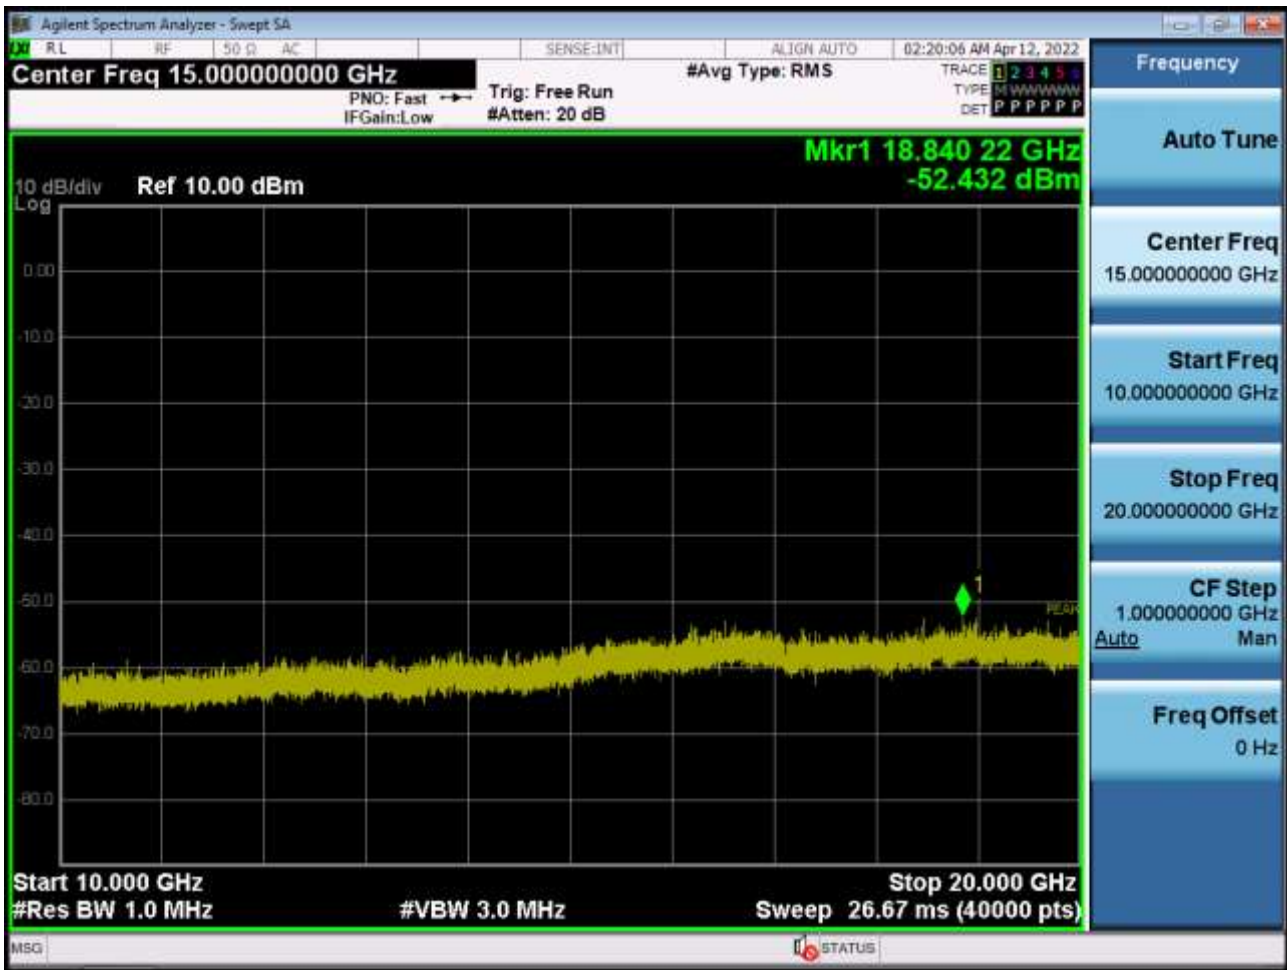


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

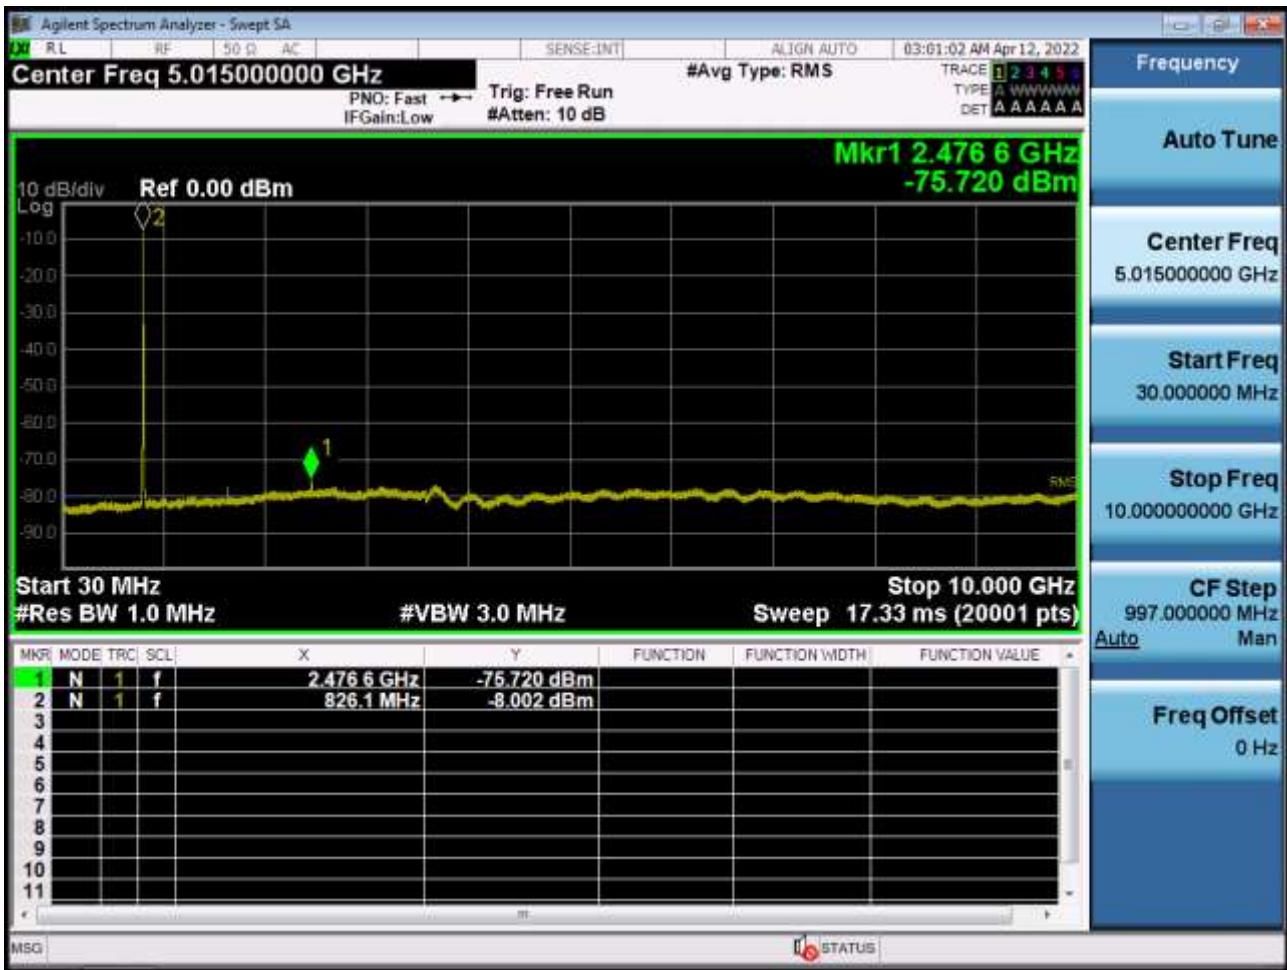


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

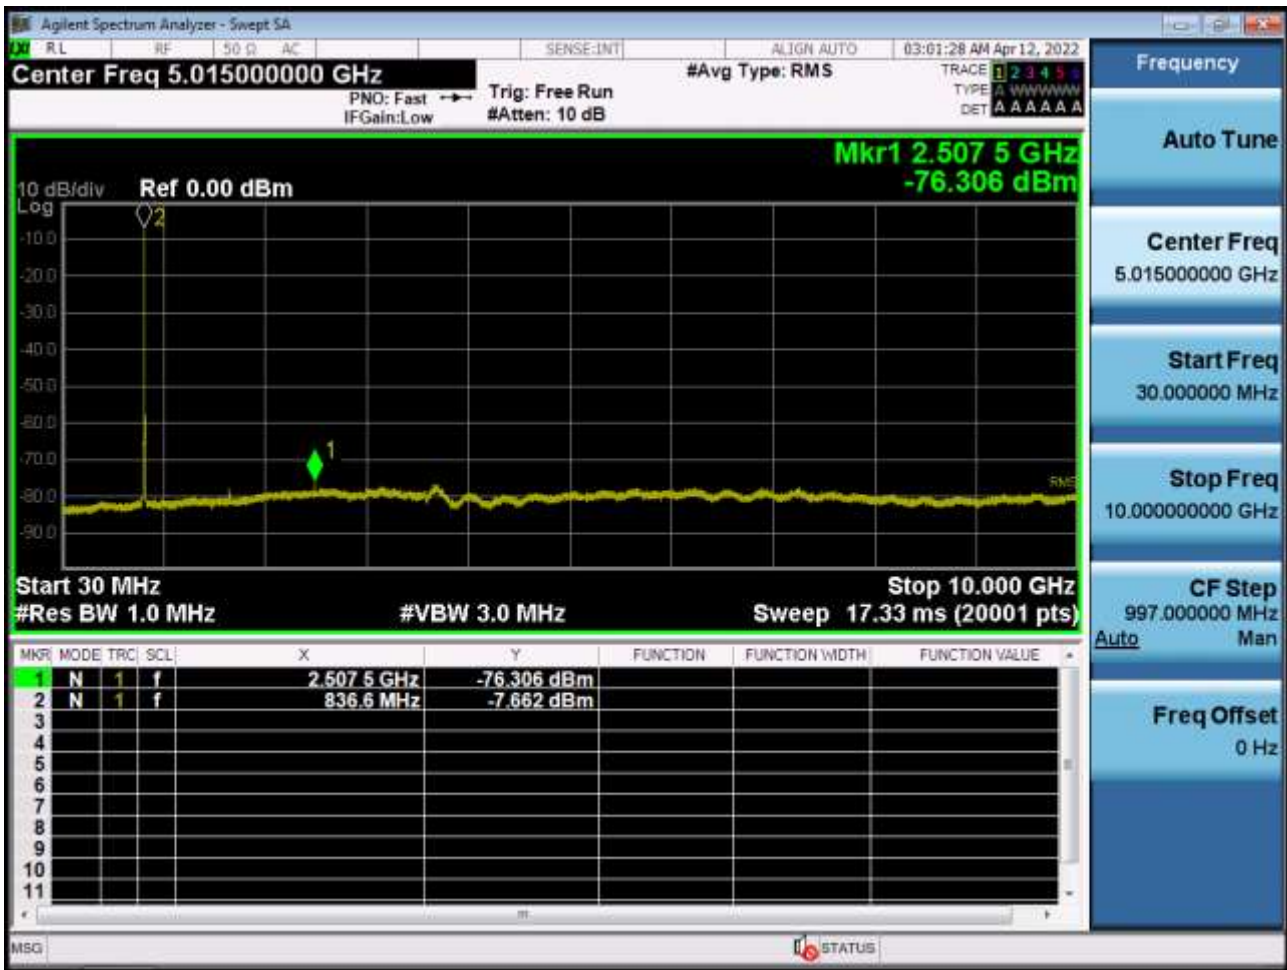

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions

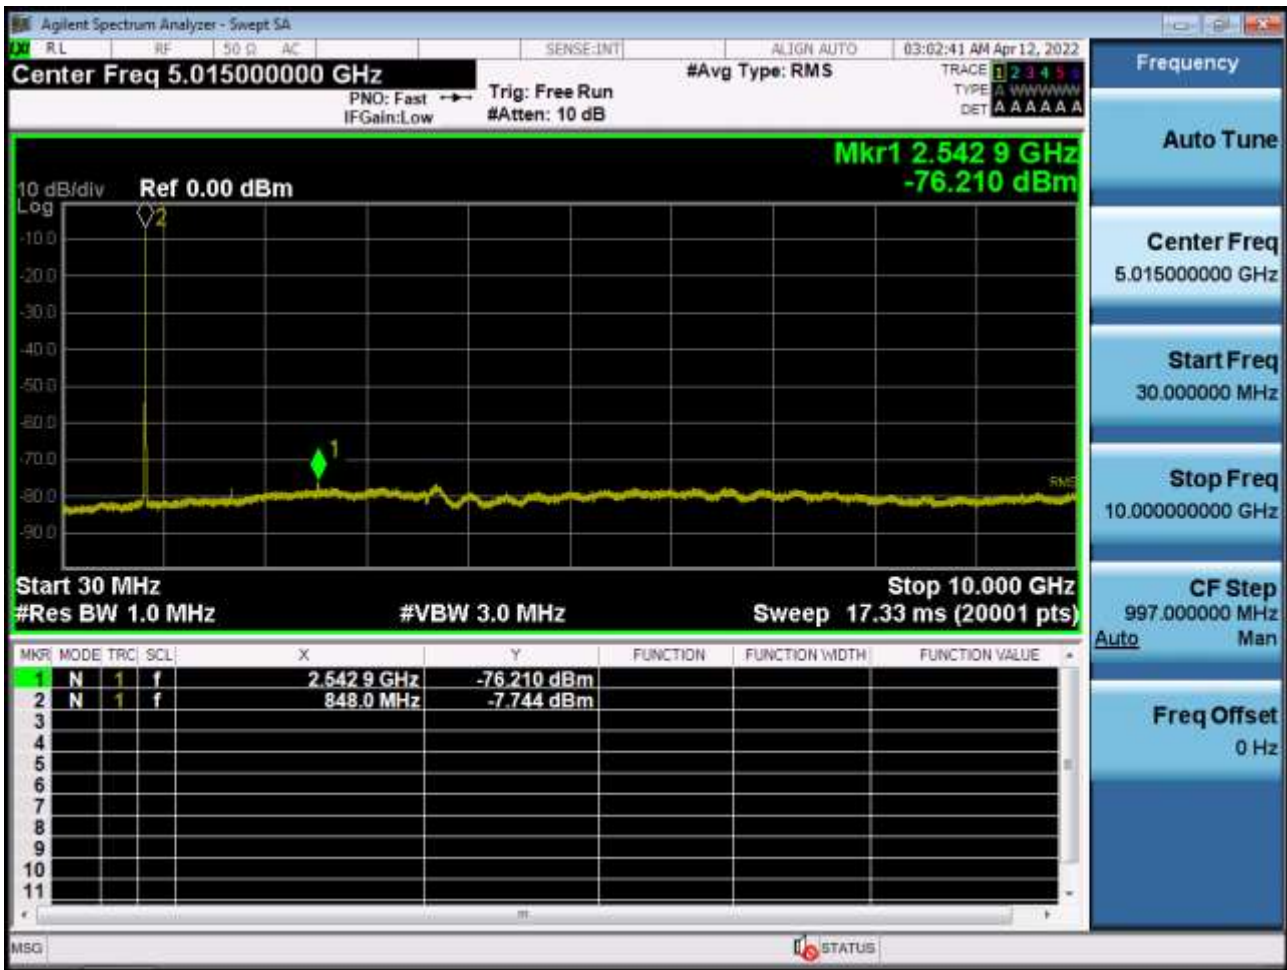


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

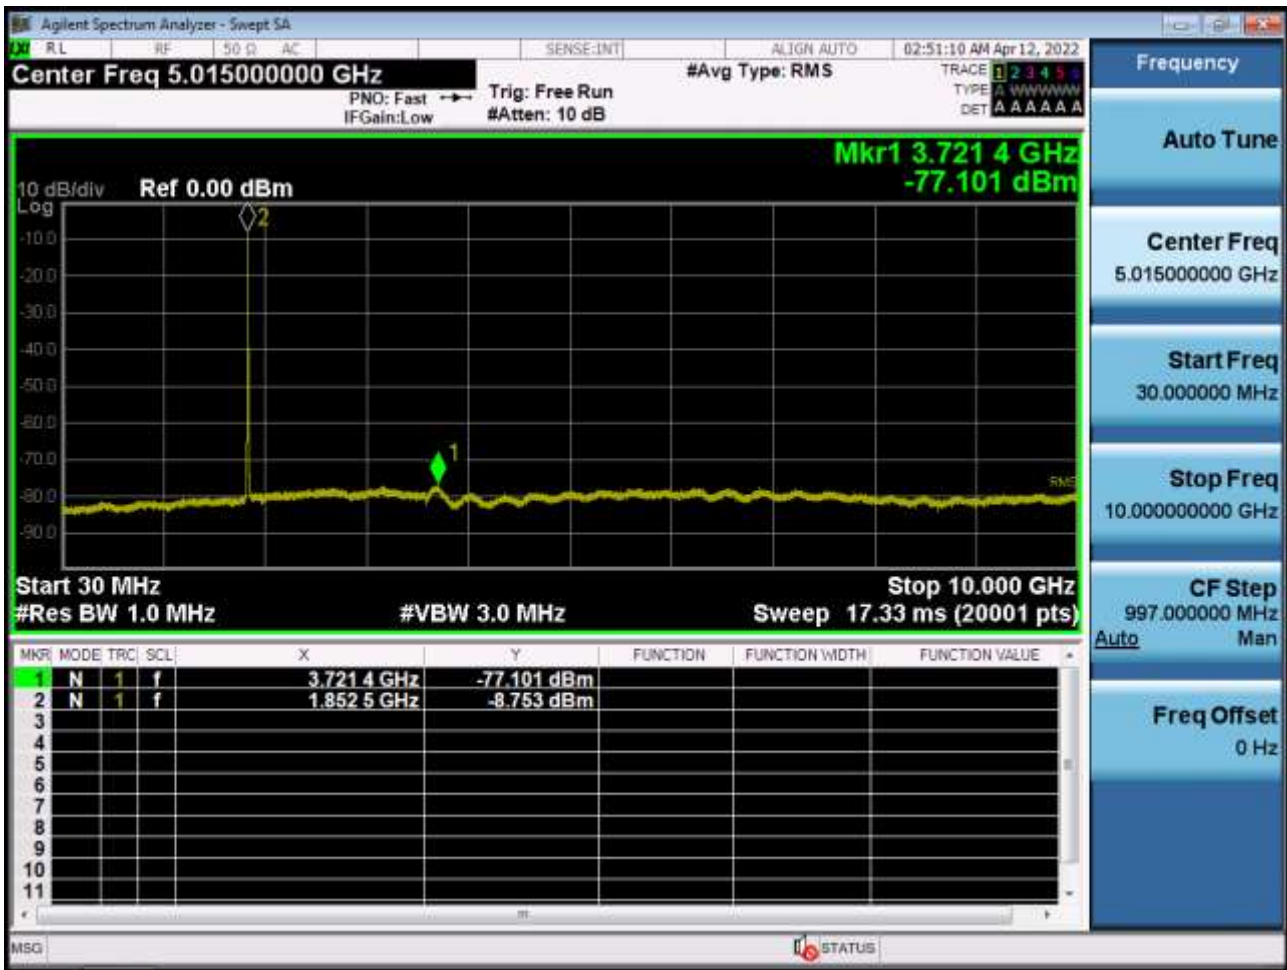

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2




■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

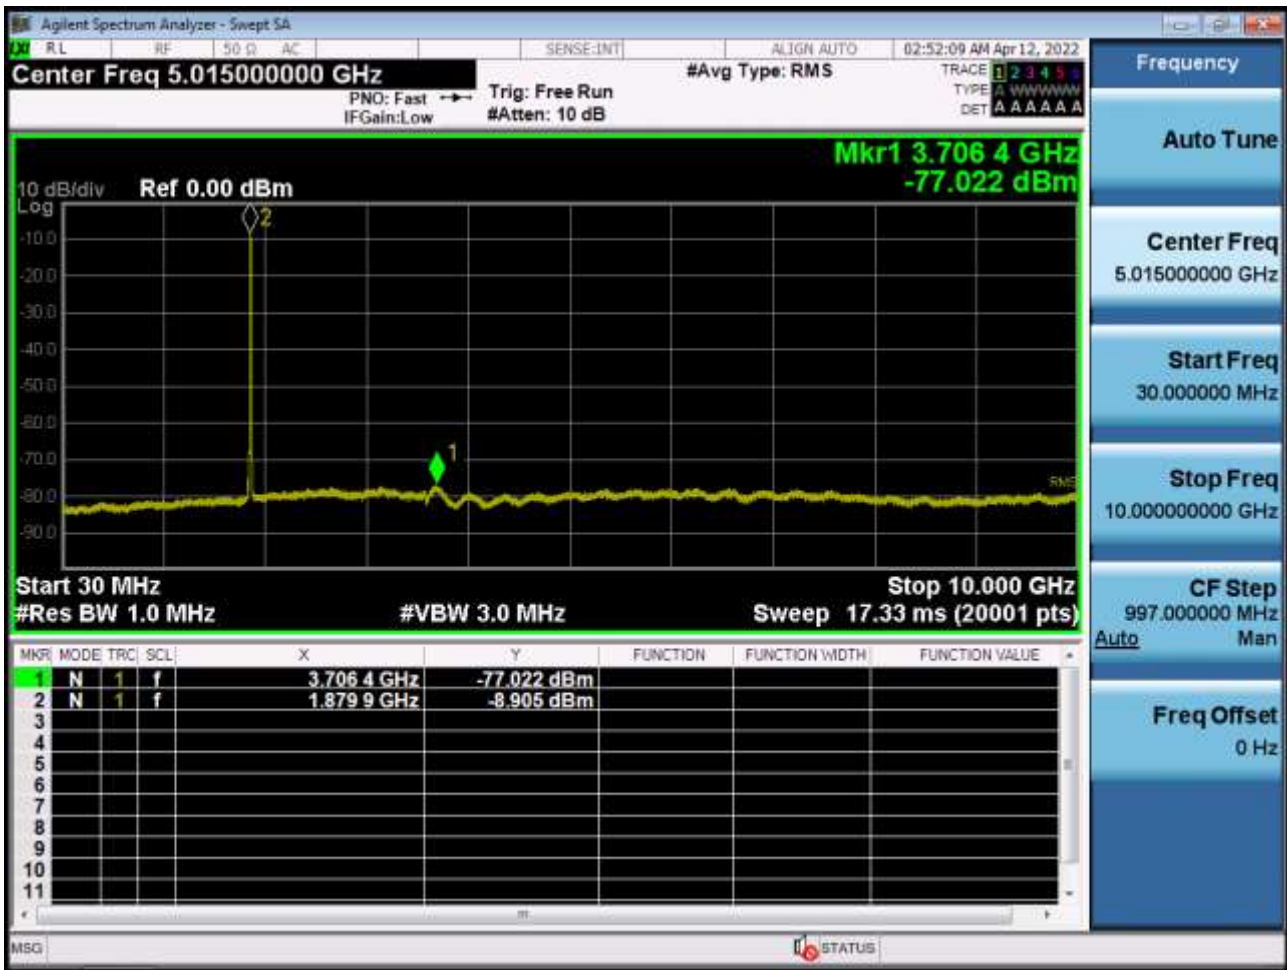

■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2




■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

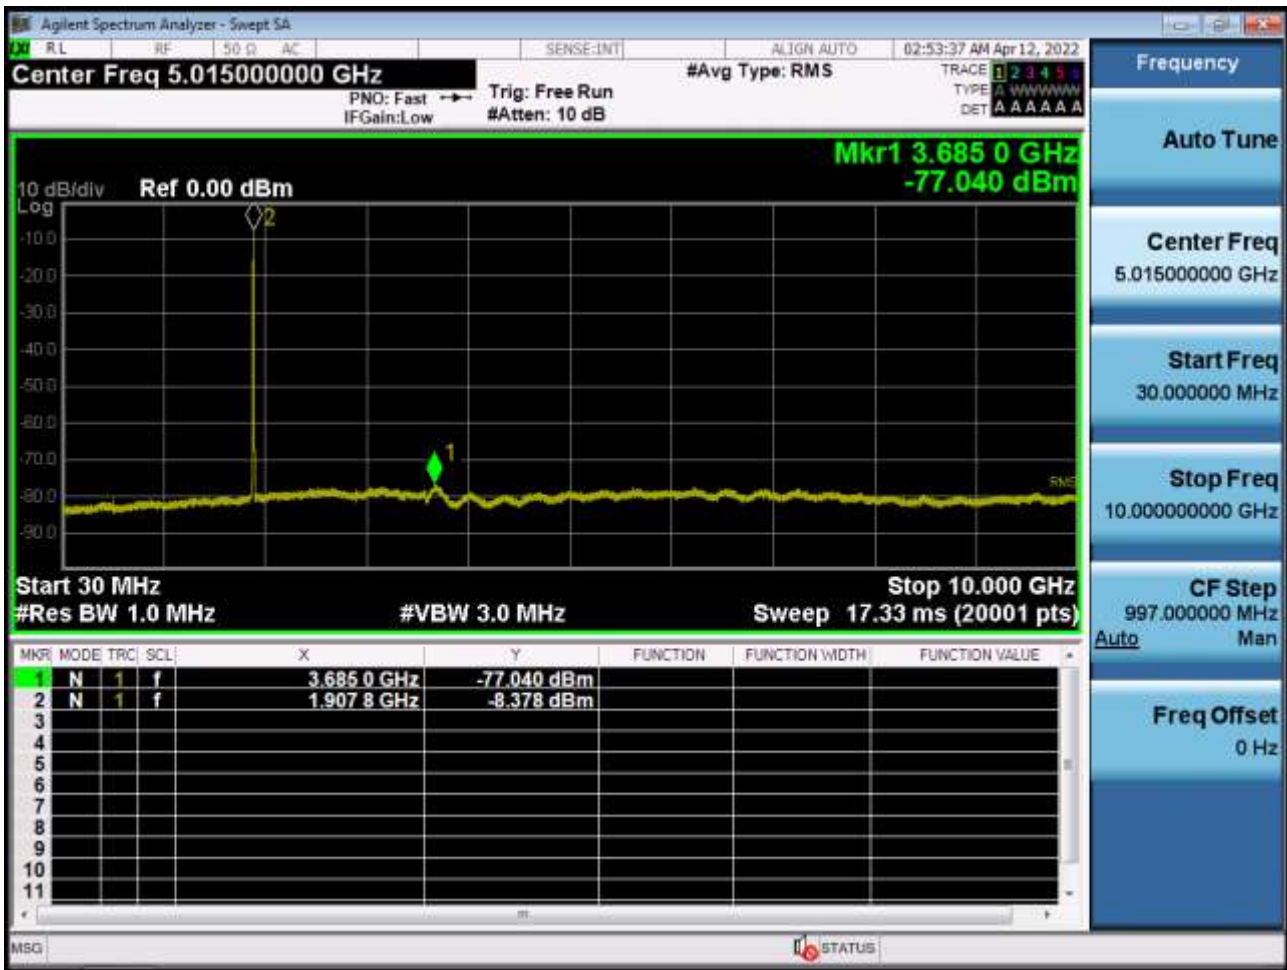


■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2




■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions1

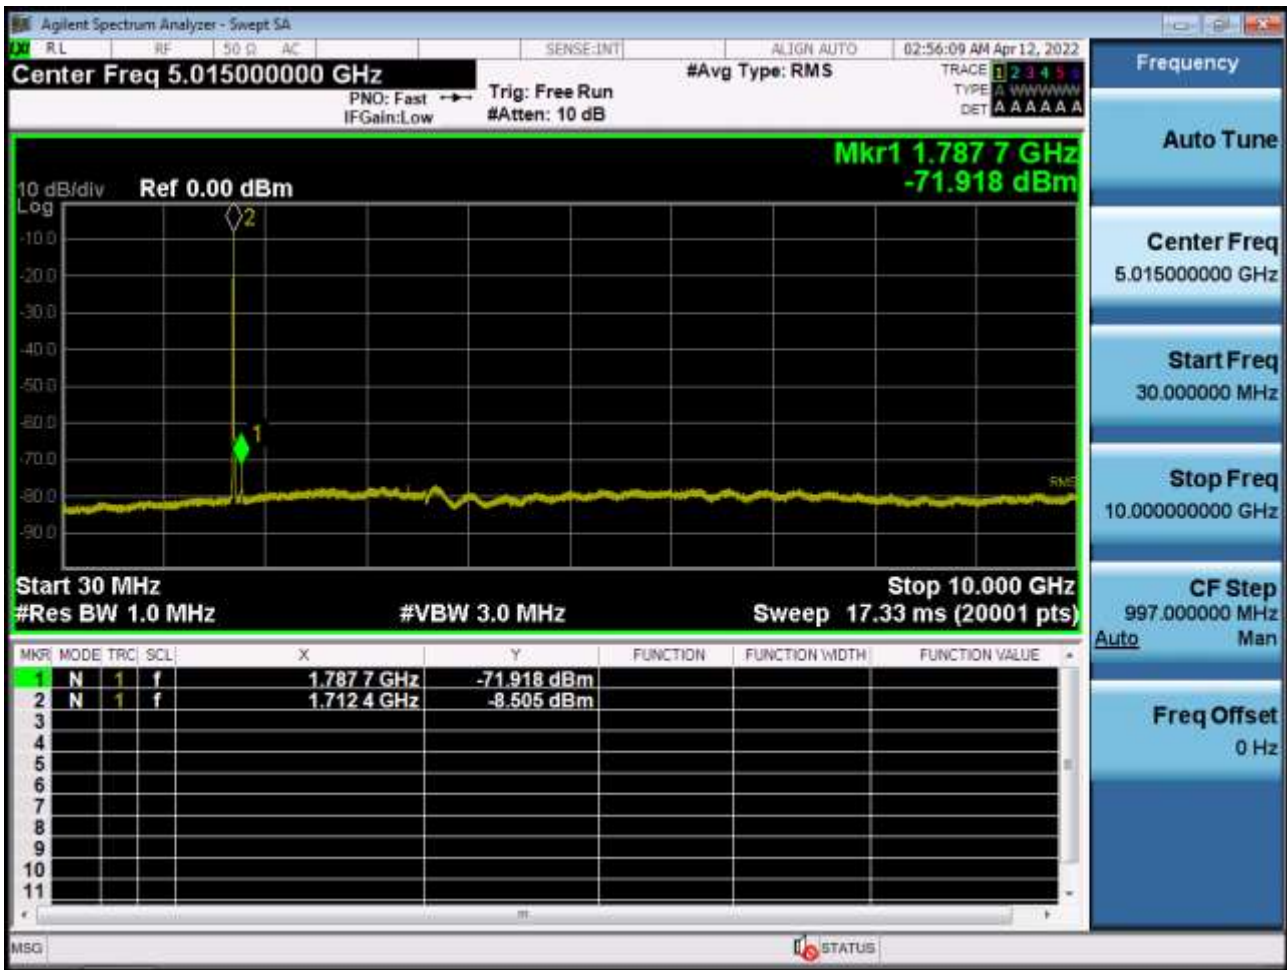

■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions2

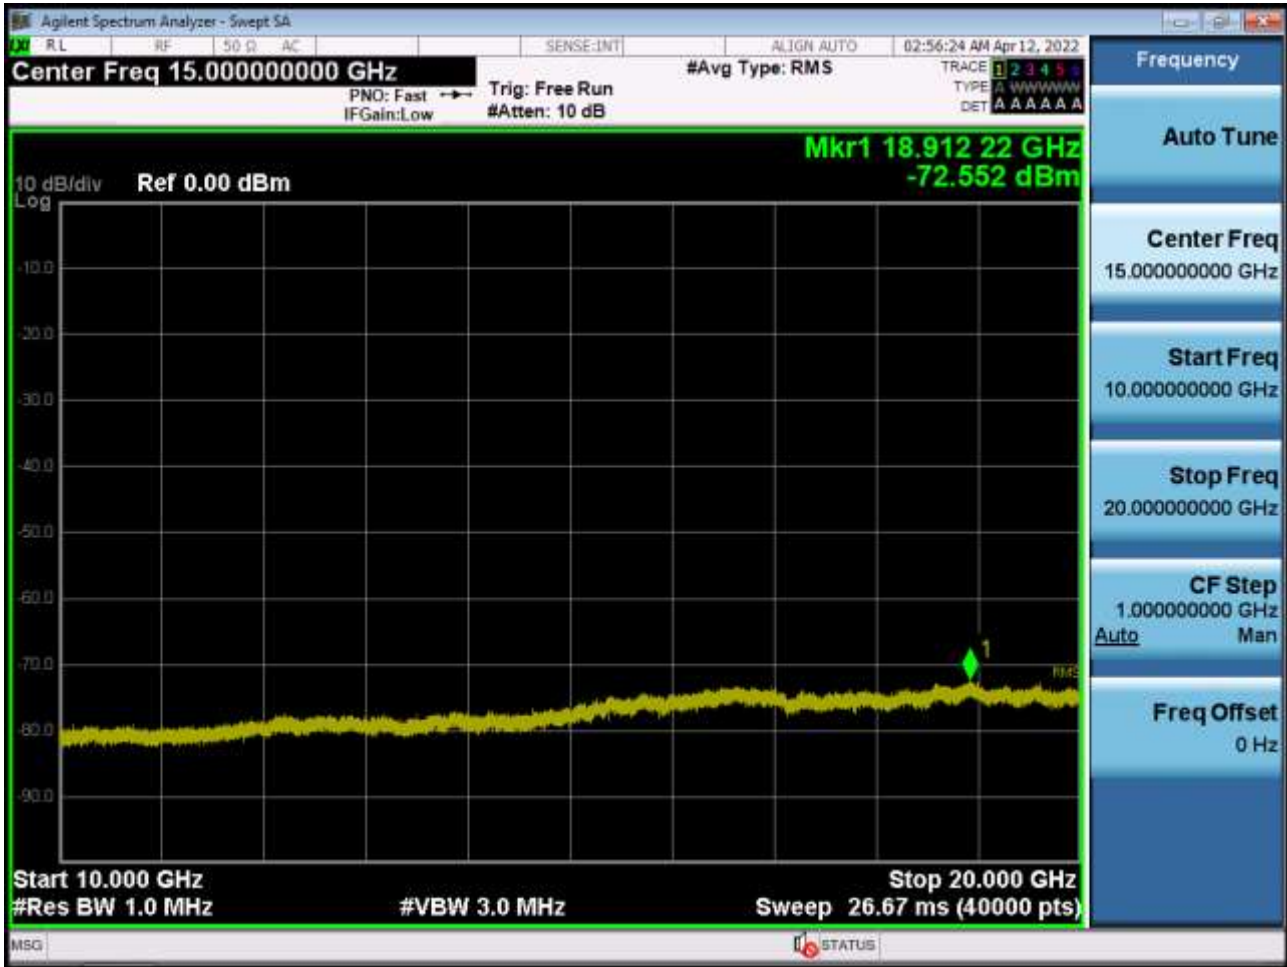


■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions1

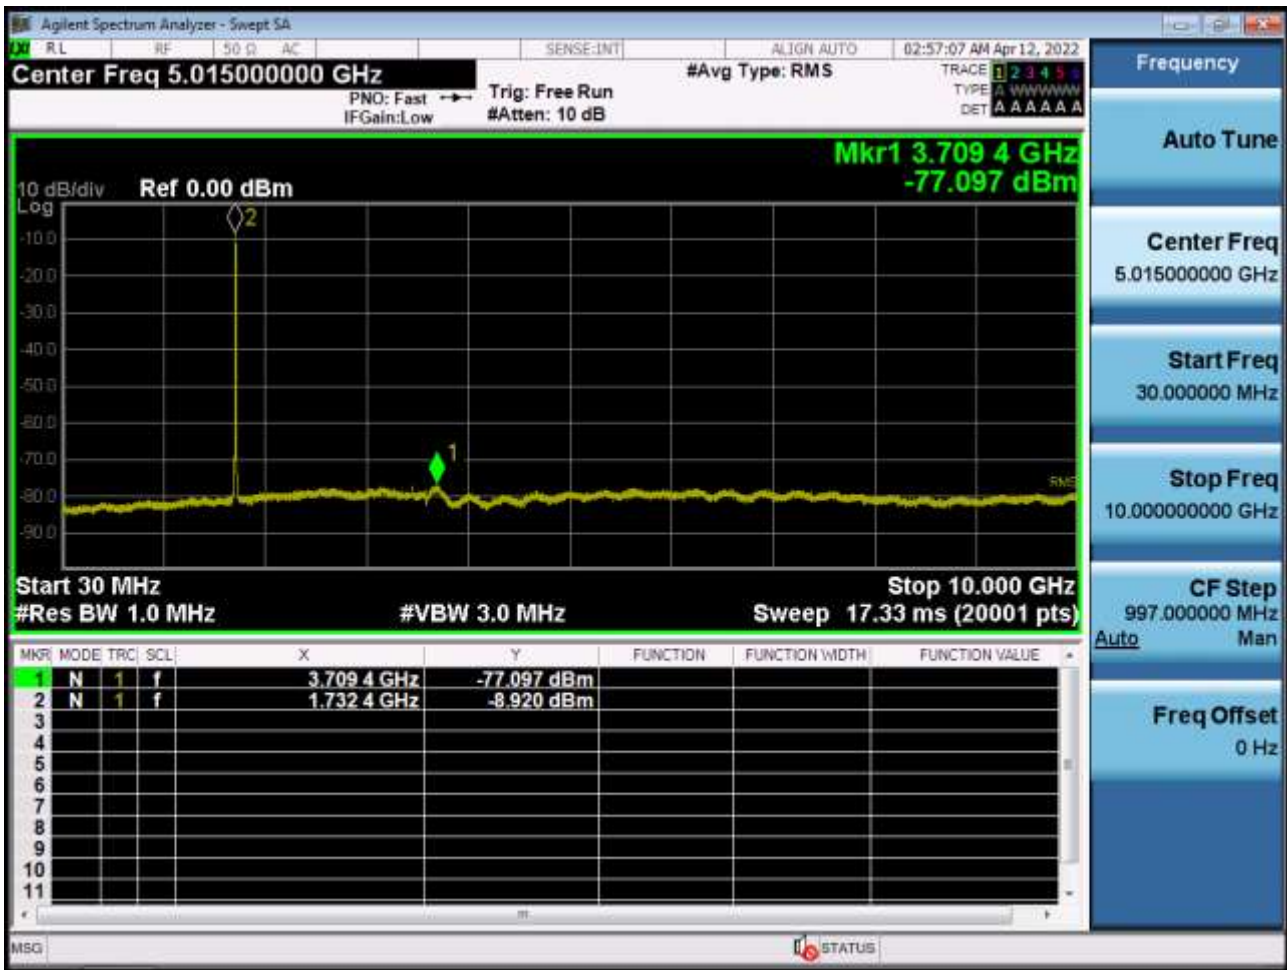

■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions2




■ WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions1

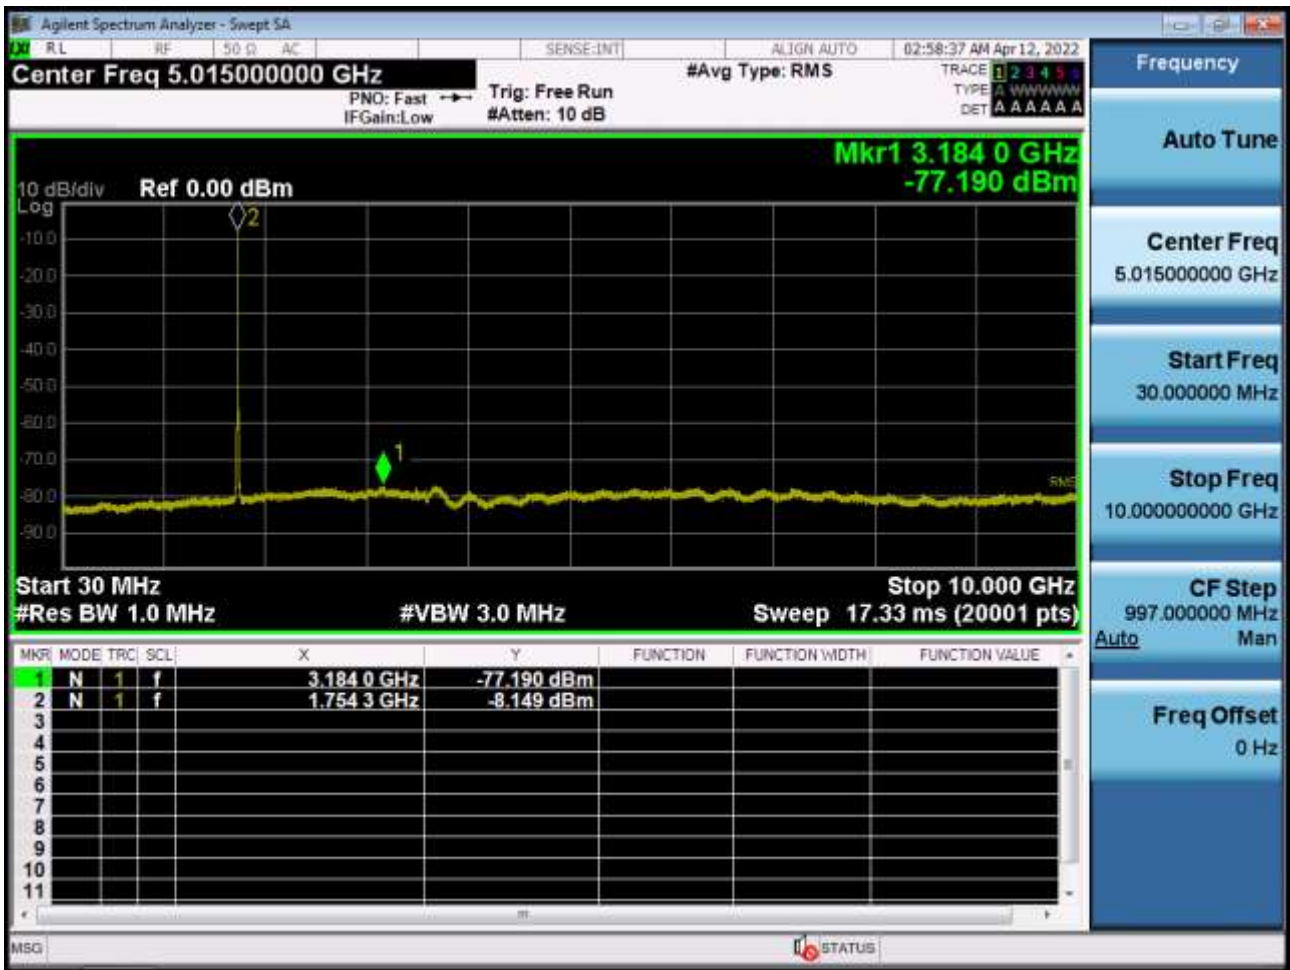


■ WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions2




■ CDMA Secondary800 MODE (476 CH.) Conducted Spurious Emissions1

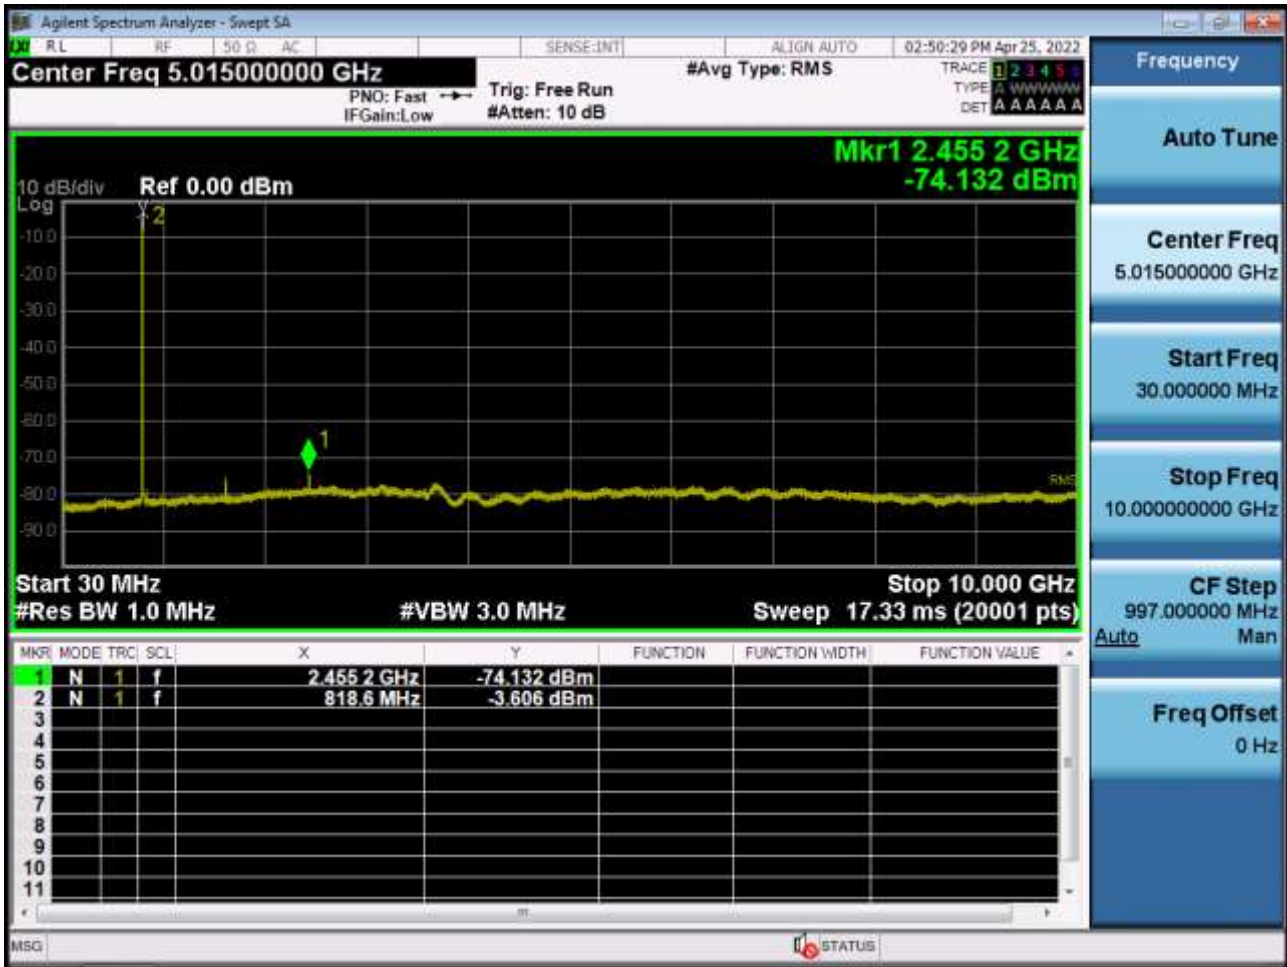

■ CDMA850 MODE (1013 CH.) Conducted Spurious Emissions1

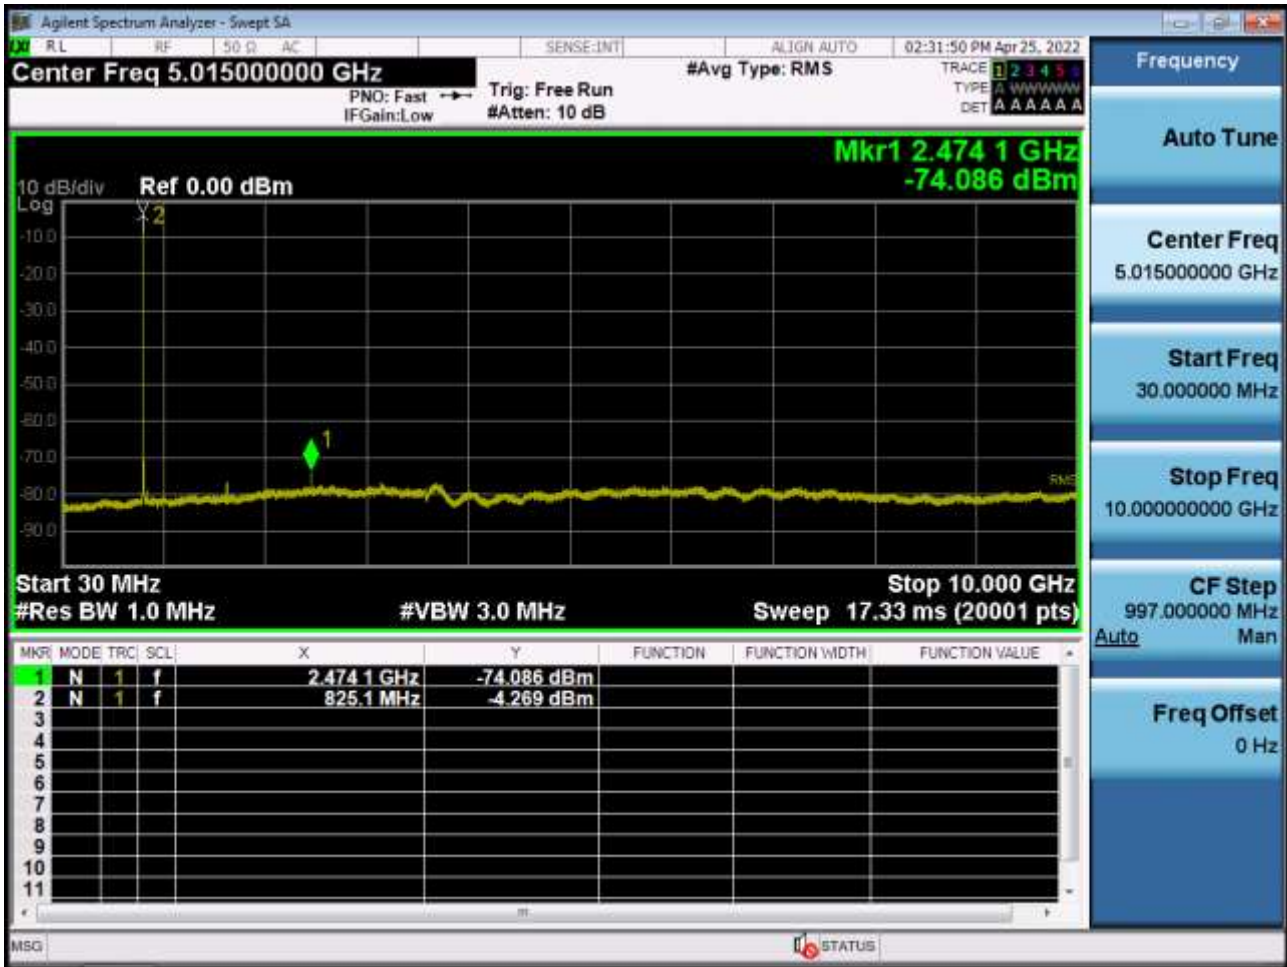

■ CDMA PCS MODE (25 CH.) Conducted Spurious Emissions1

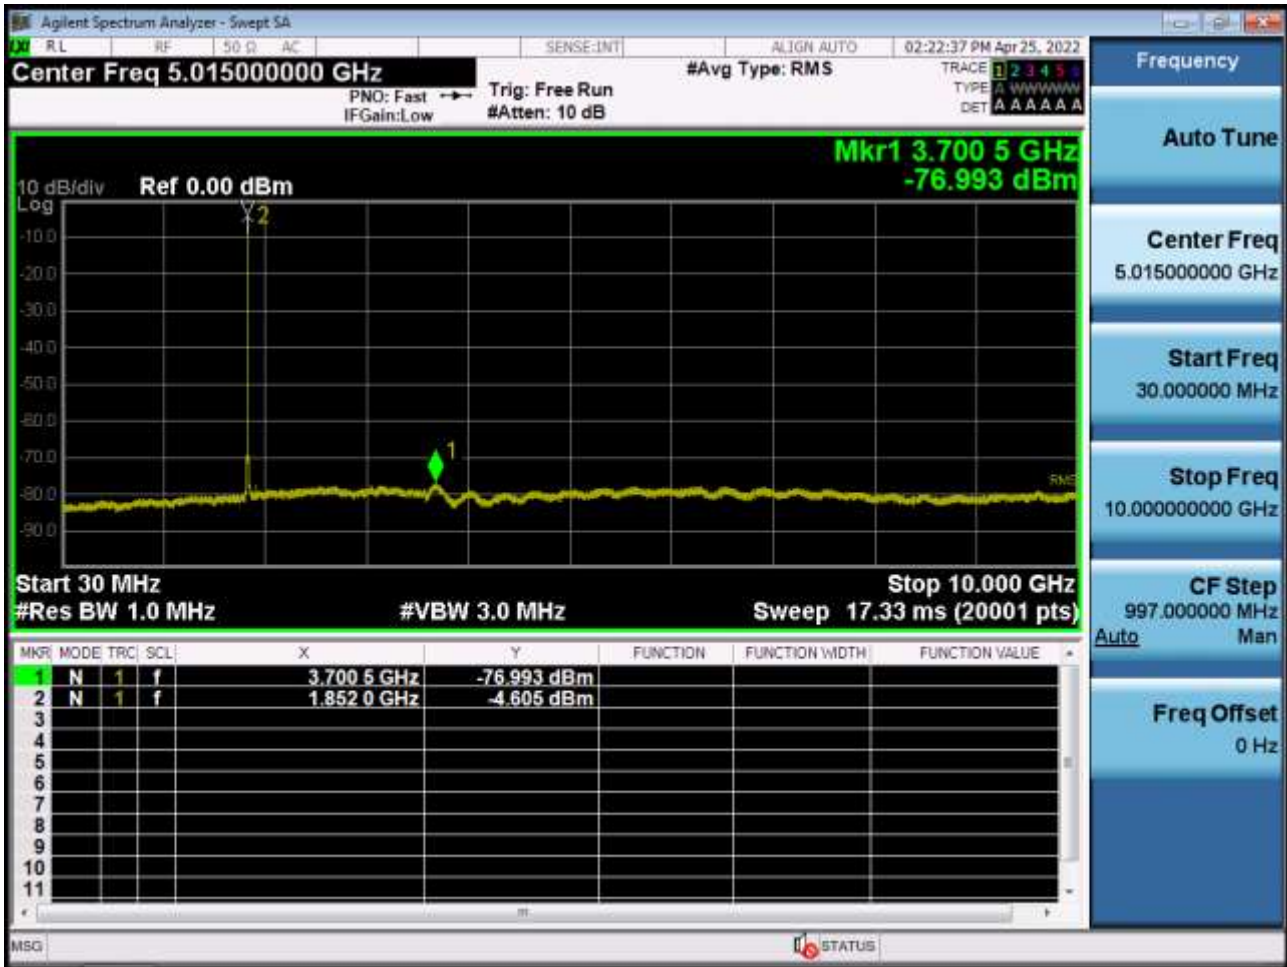

■ CDMA PCS MODE (25 CH.) Conducted Spurious Emissions2



10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2205-FC019-P