

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
May 19, 2022

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-2205-FC030-R1

FCC ID: A3LSMG990U2

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-G990U2
 Additional Model(s): SM-G990U3/DS
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §27, §2

	Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
					Max. Power (W)	Max. Power (dBm)
Power Class 3	LTE – Band 41/38 (5)	2498.5 – 2687.5	4M49G7D	QPSK	0.158	21.99
			4M50W7D	16QAM	0.131	21.18
			4M51W7D	64QAM	0.102	20.09
			4M50W7D	256QAM	0.052	17.14
	LTE – Band 41/38 (10)	2501.0 – 2685.0	8M97G7D	QPSK	0.160	22.05
			8M98W7D	16QAM	0.131	21.18
			8M96W7D	64QAM	0.102	20.07
			8M97W7D	256QAM	0.053	17.28
	LTE – Band 41/38 (15)	2503.5 – 2682.5	13M4G7D	QPSK	0.170	22.30
			13M5W7D	16QAM	0.138	21.39
			13M4W7D	64QAM	0.109	20.36
			13M5W7D	256QAM	0.057	17.53
	LTE – Band 41/38 (20)	2506.0 – 2680.0	18M0G7D	QPSK	0.166	22.19
			17M9W7D	16QAM	0.134	21.26
			17M9W7D	64QAM	0.106	20.24
			17M9W7D	256QAM	0.044	16.47
Power Class 2	LTE – Band 41 (5)	2498.5 – 2687.5	4M50G7D	QPSK	0.269	24.29
			4M50W7D	16QAM	0.226	23.55
			4M49W7D	64QAM	0.164	22.14
			4M50W7D	256QAM	0.088	19.43
	LTE – Band 41 (10)	2501.0 – 2685.0	8M96G7D	QPSK	0.280	24.47
			8M99W7D	16QAM	0.233	23.68
			8M97W7D	64QAM	0.175	22.44
			8M95W7D	256QAM	0.092	19.63
	LTE – Band 41 (15)	2503.5 – 2682.5	13M5G7D	QPSK	0.301	24.78
			13M5W7D	16QAM	0.240	23.80
			13M4W7D	64QAM	0.177	22.48
			13M4W7D	256QAM	0.100	19.99
	LTE – Band 41 (20)	2506.0 – 2680.0	17M9G7D	QPSK	0.290	24.62
			17M9W7D	16QAM	0.237	23.74
			17M9W7D	64QAM	0.156	21.92
			17M9W7D	256QAM	0.098	19.91

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2205-FC030-R1

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2205-FC030	May 13, 2022	- First Approval Report
HCT-RF-2205-FC030-R1	May 19, 2022	- Revised the Section 3.9. (Page 18.)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER.....	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH.	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	14
3.7 CHANNEL EDGE.....	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
3.9 WORST CASE(RADIATED TEST)	18
3.10 WORST CASE(CONDUCTED TEST)	20
4. LIST OF TEST EQUIPMENT	21
5. MEASUREMENT UNCERTAINTY	22
6. SUMMARY OF TEST RESULTS	23
7. SAMPLE CALCULATION	24
8. TEST DATA	26
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	26
8.1.1 Power Class 3	26
8.1.2 Power Class 2	30
8.2 RADIATED SPURIOUS EMISSIONS	32
8.2.1 Power Class 3	32
8.2.2 Power Class 2	36
8.3 PEAK-TO-AVERAGE RATIO.....	40
8.3.1 Power Class 3	40
8.3.2 Power Class 2	41
8.4 OCCUPIED BANDWIDTH	42
8.4.1 Power Class 3	42
8.4.2 Power Class 2	43
8.5 CONDUCTED SPURIOUS EMISSIONS	44
8.5.1 Power Class 3	44
8.5.2 Power Class 2	45

8.6 CHANNEL EDGE	46
8.6.1 Power Class 3	46
8.6.2 Power Class 2	48
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	49
8.7.1 Power Class 3	49
8.7.2 Power Class 2	65
9. TEST PLOTS.....	77
10. ANNEX A_ TEST SETUP PHOTO.....	270

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG990U2
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile Phone
Model(s):	SM-G990U2
Additional Model(s):	SM-G990U3/DS
Tx Frequency:	2498.5 – 2687.5 : 5 MHz 2501.0 – 2685.0 : 10 MHz 2503.5 – 2682.5 : 15 MHz 2506.0 – 2680.0 : 20 MHz
Date(s) of Tests:	April 05, 2022 ~ May 12, 2022
Serial number:	Radiated: R3CT30Q0QPV Conducted: R3CT30Q0SAV

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS, CDMA(BC0, 1, 10) and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80), Bluetooth, BT LE, NFC, AIT, WPT, mmWave(n260/261).

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed NormalHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dB})}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and NormalHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

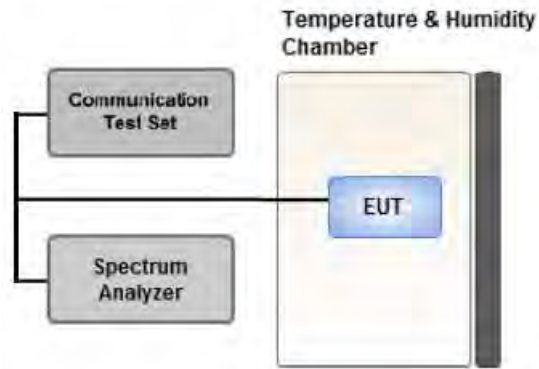

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{PK} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{PK} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.


1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:

Set $\geq [10 \times$ (number of points in sweep) \times (transmission period)] for single sweep
(automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25%.

3.5 OCCUPIED BANDWIDTH.

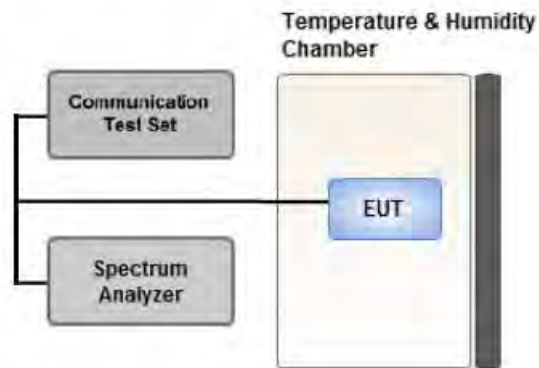

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

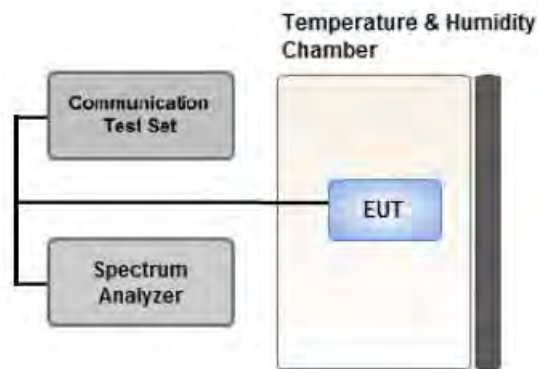

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 CHANNEL EDGE

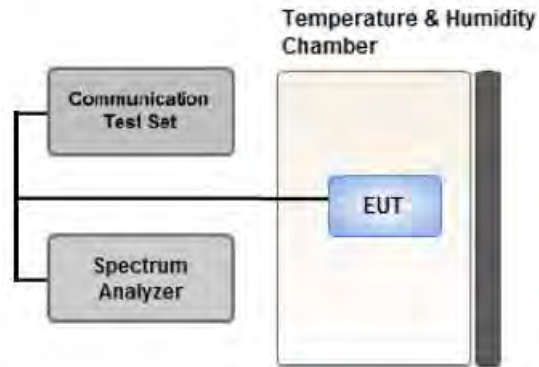

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1MHz of the channel edge the RBW should be 2% of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

1. The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2. $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3. $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz.
5. $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
6. X is the greater of 6MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

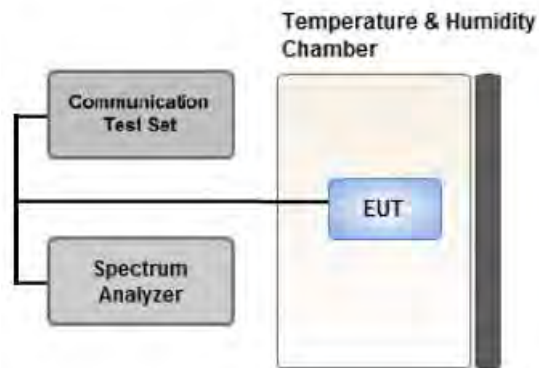

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
 Mode : Stand alone, Simultaneous transmission scenarios
 Worst case : Stand alone
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- LTE Band 41 power class 3(5 M/10 M/15 M/20 M) overlaps the entire frequency range of LTE Band 38(5 M/10 M/15 M/20 M) and they have the same Tune-up power.
 Therefore, test data provided in this report covers Band38 as well as Band 41 power class 3.
- Please refer to the table below.
- SM-G990U2 & additional models were tested and the worst case results are reported.
 (Worst case : SM-G990U2)

[power class3 Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	5	Low, Mid	1	0	Y
			High	1	24	
		10	Low, Mid	1	0	
			High	1	49	
		15	Low, Mid	1	0	
			High	1	74	
		20	Low, Mid	1	0	
			High	1	99	
Radiated Spurious and Harmonic Emissions	QPSK	5	Low, Mid	1	0	Y
			High	1	24	
		10	Low, Mid	1	0	
			High	1	49	
		15	Low, Mid	1	0	
			High	1	74	
		20	Low, Mid	1	0	
			High	1	99	

[power class2 Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	5	Low	1	13	Y
			Mid	1	0	
			High	1	24	
		10	Low	1	25	
			Mid	1	0	
			High	1	49	
		15	Low	1	38	
			Mid	1	0	
			High	1	74	
		20	Low	1	50	
			Mid	1	0	
			High	1	99	
Radiated Spurious and Harmonic Emissions	QPSK	5	Low	1	13	Y
			Mid	1	0	
			High	1	24	
		10	Low	1	25	
			Mid	1	0	
			High	1	49	
		15	Low	1	38	
			Mid	1	0	
			High	1	74	
		20	Low	1	50	
			Mid	1	0	
			High	1	99	

3.10 WORST CASE(CONDUCTED TEST)

- LTE Band 41 power class 3(5 M/10 M/15 M/20 M) overlaps the entire frequency range of LTE Band 38(5 M/10 M/15 M/20 M) and they have the same Tune-up power.

Therefore, test data provided in this report covers Band38 as well as Band 41 power class 3.

- All modes of operation were investigated and the worst case configuration results are reported.

- SM-G990U2 & additional models were tested and the worst case results are reported.

(Worst case : SM-G990U2)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Channel Edge	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		5, 10, 15, 20	Low, Mid, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6200863156	12/29/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	<ul style="list-style-type: none"> ■ $< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges ■ $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges ■ $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges ■ $< 43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz 	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}])$	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
40620	2593.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

8.1.1 Power Class 3

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2498.5	LTE B41/38 5 MHz	QPSK	-24.48	12.42	10.70	2.49	H	< 2.00	0.116	20.63	
		16-QAM	-25.33	11.57	10.70	2.49	H		0.095	19.78	
		64-QAM	-26.53	10.37	10.70	2.49	H		0.072	18.58	
		256-QAM	-29.48	7.42	10.70	2.49	H		0.037	15.63	
2502.5		QPSK	-24.58	12.32	10.70	2.49	H		0.113	20.53	
		16-QAM	-25.33	11.57	10.70	2.49	H		0.095	19.78	
		64-QAM	-26.38	10.52	10.70	2.49	H		0.075	18.73	
		256-QAM	-29.51	7.39	10.70	2.49	H		0.036	15.60	
2593.0		QPSK	-23.76	13.56	10.62	2.53	H		0.146	21.65	
		16-QAM	-24.89	12.43	10.62	2.53	H		0.113	20.52	
		64-QAM	-25.93	11.39	10.62	2.53	H		0.089	19.48	
		256-QAM	-28.88	8.44	10.62	2.53	H		0.045	16.53	
2687.5		QPSK	-23.50	13.80	10.78	2.59	H		0.158	21.99	
		16-QAM	-24.31	12.99	10.78	2.59	H		0.131	21.18	
		64-QAM	-25.40	11.90	10.78	2.59	H		0.102	20.09	
		256-QAM	-28.35	8.95	10.78	2.59	H		0.052	17.14	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2501.0	LTE B41/38 10 MHz	QPSK	-24.61	12.29	10.70	2.49	H	< 2.00	0.112	20.50
		16-QAM	-25.50	11.40	10.70	2.49	H		0.091	19.61
		64-QAM	-26.54	10.36	10.70	2.49	H		0.072	18.57
		256-QAM	-29.69	7.21	10.70	2.49	H		0.035	15.42
2505.0		QPSK	-24.48	12.48	10.70	2.50	H		0.117	20.68
		16-QAM	-25.23	11.73	10.70	2.50	H		0.099	19.93
		64-QAM	-26.39	10.57	10.70	2.50	H		0.075	18.77
		256-QAM	-29.60	7.36	10.70	2.50	H		0.036	15.56
2593.0		QPSK	-24.13	13.19	10.62	2.53	H		0.134	21.28
		16-QAM	-24.99	12.33	10.62	2.53	H		0.110	20.42
		64-QAM	-26.10	11.22	10.62	2.53	H		0.085	19.31
		256-QAM	-29.00	8.32	10.62	2.53	H		0.044	16.41
2685.0		QPSK	-23.64	13.86	10.77	2.58	H		0.160	22.05
		16-QAM	-24.51	12.99	10.77	2.58	H		0.131	21.18
		64-QAM	-25.62	11.88	10.77	2.58	H		0.102	20.07
		256-QAM	-28.41	9.09	10.77	2.58	H		0.053	17.28

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2503.5	LTE B41/38 15 MHz	QPSK	-24.72	12.18	10.70	2.49	H	< 2.00	0.109	20.39
		16-QAM	-25.68	11.22	10.70	2.49	H		0.088	19.43
		64-QAM	-26.65	10.25	10.70	2.49	H		0.070	18.46
		256-QAM	-29.64	7.26	10.70	2.49	H		0.035	15.47
2507.5		QPSK	-24.38	12.64	10.70	2.50	H		0.121	20.84
		16-QAM	-25.19	11.83	10.70	2.50	H		0.101	20.03
		64-QAM	-26.21	10.81	10.70	2.50	H		0.080	19.01
		256-QAM	-29.29	7.73	10.70	2.50	H		0.039	15.93
2593.0		QPSK	-24.15	13.17	10.62	2.53	H		0.134	21.26
		16-QAM	-25.11	12.21	10.62	2.53	H		0.107	20.30
		64-QAM	-26.04	11.28	10.62	2.53	H		0.087	19.37
		256-QAM	-28.94	8.38	10.62	2.53	H		0.044	16.47
2682.5		QPSK	-23.58	14.11	10.76	2.57	H		0.170	22.30
		16-QAM	-24.49	13.20	10.76	2.57	H		0.138	21.39
		64-QAM	-25.52	12.17	10.76	2.57	H		0.109	20.36
		256-QAM	-28.35	9.34	10.76	2.57	H		0.057	17.53

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2506.0	LTE B41/38 20 MHz	QPSK	-24.84	12.12	10.70	2.50	H	< 2.00	0.108	20.32
		16-QAM	-25.74	11.22	10.70	2.50	H		0.088	19.42
		64-QAM	-26.66	10.30	10.70	2.50	H		0.071	18.50
		256-QAM	-29.85	7.11	10.70	2.50	H		0.034	15.31
2510.0		QPSK	-24.45	12.57	10.70	2.50	H		0.119	20.77
		16-QAM	-25.13	11.89	10.70	2.50	H		0.102	20.09
		64-QAM	-26.24	10.78	10.70	2.50	H		0.079	18.98
		256-QAM	-29.48	7.54	10.70	2.50	H		0.038	15.74
2593.0		QPSK	-24.18	13.14	10.62	2.53	H		0.133	21.23
		16-QAM	-25.12	12.20	10.62	2.53	H		0.107	20.29
		64-QAM	-26.12	11.20	10.62	2.53	H		0.085	19.29
		256-QAM	-28.94	8.38	10.62	2.53	H		0.044	16.47
2680.0		QPSK	-23.69	14.00	10.76	2.57	H		0.166	22.19
		16-QAM	-24.62	13.07	10.76	2.57	H		0.134	21.26
		64-QAM	-25.64	12.05	10.76	2.57	H		0.106	20.24
		256-QAM	-32.44	5.25	10.76	2.57	H		0.022	13.44

8.1.2 Power Class 2

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2498.5	LTE B41/ 5 MHz	QPSK	-21.44	15.46	10.70	2.49	H	< 2.00	0.233	23.67	
		16-QAM	-22.21	14.69	10.70	2.49	H		0.195	22.90	
		64-QAM	-24.11	12.79	10.70	2.49	H		0.126	21.00	
		256-QAM	-26.21	10.69	10.70	2.49	H		0.078	18.90	
2593.0		QPSK	-21.78	15.54	10.62	2.53	H		0.231	23.63	
		16-QAM	-22.51	14.81	10.62	2.53	H		0.195	22.90	
		64-QAM	-23.69	13.63	10.62	2.53	H		0.149	21.72	
		256-QAM	-26.58	10.74	10.62	2.53	H		0.076	18.83	
2687.5		QPSK	-21.20	16.10	10.78	2.59	H		0.269	24.29	
		16-QAM	-21.94	15.36	10.78	2.59	H		0.226	23.55	
		64-QAM	-23.35	13.95	10.78	2.59	H		0.164	22.14	
		256-QAM	-26.06	11.24	10.78	2.59	H		0.088	19.43	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2501.0	LTE B41/ 10 MHz	QPSK	-21.34	15.56	10.70	2.49	H	< 2.00	0.238	23.77	
		16-QAM	-22.15	14.75	10.70	2.49	H		0.198	22.96	
		64-QAM	-24.01	12.89	10.70	2.49	H		0.129	21.10	
		256-QAM	-26.14	10.76	10.70	2.49	H		0.079	18.97	
2593.0		QPSK	-21.80	15.52	10.62	2.53	H		0.230	23.61	
		16-QAM	-22.30	15.02	10.62	2.53	H		0.205	23.11	
		64-QAM	-23.83	13.49	10.62	2.53	H		0.144	21.58	
		256-QAM	-26.64	10.68	10.62	2.53	H		0.075	18.77	
2685.0		QPSK	-21.22	16.28	10.77	2.58	H		0.280	24.47	
		16-QAM	-22.01	15.49	10.77	2.58	H		0.233	23.68	
		64-QAM	-23.25	14.25	10.77	2.58	H		0.175	22.44	
		256-QAM	-26.06	11.44	10.77	2.58	H		0.092	19.63	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2503.5	LTE B41/ 15 MHz	QPSK	-21.54	15.36	10.70	2.49	H	< 2.00	0.227	23.57	
		16-QAM	-22.39	14.51	10.70	2.49	H		0.187	22.72	
		64-QAM	-24.29	12.61	10.70	2.49	H		0.121	20.82	
		256-QAM	-25.97	10.93	10.70	2.49	H		0.082	19.14	
2593.0		QPSK	-21.77	15.55	10.62	2.53	H		0.231	23.64	
		16-QAM	-22.64	14.68	10.62	2.53	H		0.189	22.77	
		64-QAM	-23.76	13.56	10.62	2.53	H		0.146	21.65	
		256-QAM	-26.59	10.73	10.62	2.53	H		0.076	18.82	
2682.5		QPSK	-21.10	16.59	10.76	2.57	H		0.301	24.78	
		16-QAM	-22.08	15.61	10.76	2.57	H		0.240	23.80	
		64-QAM	-23.40	14.29	10.76	2.57	H		0.177	22.48	
		256-QAM	-25.89	11.80	10.76	2.57	H		0.100	19.99	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2506.0	LTE B41/ 20 MHz	QPSK	-21.67	15.29	10.70	2.50	H	< 2.00	0.224	23.49	
		16-QAM	-22.46	14.50	10.70	2.50	H		0.186	22.70	
		64-QAM	-24.27	12.69	10.70	2.50	H		0.123	20.89	
		256-QAM	-25.98	10.98	10.70	2.50	H		0.083	19.18	
2593.0		QPSK	-21.74	15.58	10.62	2.53	H		0.233	23.67	
		16-QAM	-22.64	14.68	10.62	2.53	H		0.189	22.77	
		64-QAM	-23.71	13.61	10.62	2.53	H		0.148	21.70	
		256-QAM	-26.47	10.85	10.62	2.53	H		0.078	18.94	
2680.0		QPSK	-21.26	16.43	10.76	2.57	H		0.290	24.62	
		16-QAM	-22.14	15.55	10.76	2.57	H		0.237	23.74	
		64-QAM	-23.96	13.73	10.76	2.57	H		0.156	21.92	
		256-QAM	-25.97	11.72	10.76	2.57	H		0.098	19.91	

8.2 RADIATED SPURIOUS EMISSIONS

8.2.1 Power Class 3

- ▣ OPERATING FREQUENCY : 2687.5 MHz
- ▣ MEASURED OUTPUT POWER: 21.99 dBm = 0.158 W
- ▣ MODE: LTE B41/38
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 46.99 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39675 (2498.5)	4 997.00	-48.61	12.60	-58.05	3.61	V	-49.06	71.06
	7 495.50	-47.79	10.80	-48.62	4.47	H	-42.29	64.28
	9 994.00	-53.97	11.19	-49.62	5.27	V	-43.70	65.69
	14 991.00	-49.83	11.46	-39.82	6.69	H	-35.05	57.05
39715 (2502.5)	5 005.00	-47.59	12.59	-57.18	3.60	V	-48.19	68.72
	7 507.50	-50.89	10.82	-51.76	4.48	H	-45.42	65.94
	10 010.00	-49.96	11.22	-45.46	5.27	H	-39.51	60.04
	15 015.00	-53.89	11.56	-43.48	6.67	H	-38.59	59.11
40620 (2593.0)	5 186.00	-53.19	12.44	-61.71	3.70	V	-52.96	74.95
	7 779.00	-43.37	11.40	-44.20	4.54	V	-37.34	59.34
	10 372.00	-55.42	11.40	-50.37	5.45	V	-44.42	66.42
	15 558.00	-51.10	14.92	-42.78	6.80	H	-34.66	56.66
41565 (2687.5)	5 375.00	-50.26	13.00	-59.40	3.78	H	-50.18	72.17
	8 062.50	-37.74	10.80	-36.19	4.61	H	-30.00	52.00
	10 750.00	-45.46	11.20	-40.31	5.54	V	-34.65	56.64
	16 125.00	-49.69	15.95	-40.47	6.94	H	-31.46	53.45

- ▣ OPERATING FREQUENCY : 2685.0 MHz
- ▣ MEASURED OUTPUT POWER: 22.05 dBm = 0.160 W
- ▣ MODE: LTE B41/38
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 47.05 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39700 (2501.0)	5 002.00	-49.19	12.60	-58.63	3.61	V	-49.64	71.69
	7 503.00	-46.60	10.80	-47.54	4.47	H	-41.21	63.26
	10 004.00	-53.43	11.21	-48.97	5.27	H	-43.02	65.07
	15 006.00	-50.90	10.52	-39.65	6.67	H	-35.80	57.84
39740 (2505.0)	5 010.00	-46.30	12.58	-56.05	3.59	V	-47.06	67.74
	7 515.00	-54.70	10.83	-55.41	4.47	H	-49.05	69.73
	10 020.00	-50.59	11.24	-46.12	5.27	H	-40.15	60.83
	15 030.00	-52.95	11.62	-42.62	6.66	H	-37.66	58.34
40620 (2593.0)	5 186.00	-52.59	12.44	-61.11	3.70	H	-52.36	74.41
	7 779.00	-41.90	11.40	-42.73	4.54	V	-35.87	57.92
	10 372.00	-56.28	11.40	-51.23	5.45	V	-45.28	67.33
	15 558.00	-51.49	14.92	-43.17	6.80	H	-35.05	57.10
41540 (2685.0)	5 370.00	-49.69	13.00	-58.81	3.77	H	-49.58	71.63
	8 055.00	-38.44	10.80	-36.92	4.61	H	-30.72	52.77
	10 740.00	-46.42	11.22	-41.71	5.52	H	-36.01	58.06
	16 110.00	-50.00	15.92	-41.04	6.94	H	-32.06	54.11

- ▣ OPERATING FREQUENCY : 2682.5 MHz
- ▣ MEASURED OUTPUT POWER: 22.30 dBm = 0.170 W
- ▣ MODE: LTE B41/38
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 47.30 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39725 (2503.5)	5 007.00	-48.81	12.58	-58.56	3.59	V	-49.57	71.87
	7 510.50	-40.89	10.82	-41.76	4.48	H	-35.42	57.72
	10 014.00	-47.11	11.23	-42.63	5.27	V	-36.67	58.97
	15 021.00	-51.47	11.58	-40.94	6.67	H	-36.03	58.33
39765 (2507.5)	5 015.00	-45.80	12.57	-55.69	3.60	V	-46.72	67.56
	7 522.50	-55.88	10.84	-56.44	4.46	H	-50.06	70.90
	10 030.00	-50.86	11.26	-46.55	5.29	V	-40.58	61.42
	15 045.00	-53.87	11.68	-44.11	6.68	H	-39.11	59.95
40620 (2593.0)	5 186.00	-52.80	12.44	-61.32	3.70	V	-52.57	74.87
	7 779.00	-40.63	11.40	-41.46	4.54	V	-34.60	56.90
	10 372.00	-56.17	11.40	-51.12	5.45	H	-45.17	67.47
	15 558.00	-52.48	14.92	-44.16	6.80	H	-36.04	58.34
41515 (2682.5)	5 365.00	-49.98	13.00	-59.16	3.77	V	-49.93	72.23
	8 047.50	-38.05	10.80	-36.56	4.60	V	-30.36	52.66
	10 730.00	-44.17	11.24	-39.93	5.50	H	-34.19	56.49
	16 095.00	-53.44	15.89	-44.85	6.95	H	-35.91	58.21

- ▣ OPERATING FREQUENCY : 2680.0 MHz
- ▣ MEASURED OUTPUT POWER: 22.19 dBm = 0.166 W
- ▣ MODE: LTE B41/38
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 47.19 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39750 (2506.0)	5 012.00	-50.58	12.58	-60.33	3.59	V	-51.34	73.53
	7 518.00	-47.38	10.84	-47.94	4.46	H	-41.56	63.75
	10 024.00	-53.23	11.25	-48.84	5.28	H	-42.87	65.06
	15 036.00	-54.21	11.64	-44.14	6.67	V	-39.17	61.36
39790 (2510.0)	5 020.00	-46.07	12.56	-56.12	3.60	V	-47.16	67.93
	7 530.00	-55.61	10.86	-55.75	4.45	H	-49.34	70.11
	10 040.00	-49.00	11.28	-44.90	5.32	H	-38.94	59.71
	15 060.00	-56.04	11.72	-46.19	6.69	V	-41.16	61.93
40620 (2593.0)	5 186.00	-53.83	12.44	-62.35	3.70	V	-53.60	75.79
	7 779.00	-44.35	11.40	-45.18	4.54	H	-38.32	60.51
	10 372.00	-56.48	11.40	-51.43	5.45	H	-45.48	67.67
	15 558.00	-51.68	14.92	-43.36	6.80	H	-35.24	57.43
41490 (2680.0)	5 360.00	-49.96	13.00	-59.20	3.76	H	-49.96	72.15
	8 040.00	-39.90	10.80	-38.42	4.59	V	-32.21	54.40
	10 720.00	-45.19	11.26	-41.21	5.50	V	-35.45	57.64
	16 080.00	-50.24	15.86	-41.41	6.95	H	-32.50	54.69

8.2.2 Power Class 2

- ▣ OPERATING FREQUENCY : 2687.5 MHz
- ▣ MEASURED OUTPUT POWER: 24.29 dBm = 0.269 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 49.29 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39675 (2498.5)	4 997.00	-46.84	12.60	-56.28	3.61	H	-47.29	71.59
	7 495.50	-40.28	10.80	-41.11	4.47	H	-34.78	59.07
	9 994.00	-50.23	11.19	-45.88	5.27	V	-39.96	64.25
	14 991.00	-50.85	11.46	-40.84	6.69	H	-36.07	60.37
40620 (2593.0)	5 186.00	-51.96	12.44	-60.48	3.70	V	-51.73	76.02
	7 779.00	-46.19	11.40	-47.02	4.54	V	-40.16	64.46
	10 372.00	-50.07	11.40	-45.02	5.45	V	-39.07	63.37
	15 558.00	-51.75	14.92	-43.43	6.80	H	-35.31	59.61
41565 (2687.5)	5 375.00	-49.51	13.00	-58.65	3.78	H	-49.43	73.72
	8 062.50	-37.48	10.80	-35.93	4.61	H	-29.74	54.04
	10 750.00	-47.22	11.20	-42.07	5.54	H	-36.41	60.70
	16 125.00	-50.00	15.95	-40.78	6.94	H	-31.77	56.06

- ▣ OPERATING FREQUENCY : 2685.0 MHz
- ▣ MEASURED OUTPUT POWER: 24.47 dBm = 0.280 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 49.47 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39700 (2501.0)	5 002.00	-47.81	12.60	-57.25	3.61	V	-48.26	72.73
	7 503.00	-41.75	10.80	-42.69	4.47	V	-36.36	60.83
	10 004.00	-48.49	11.21	-44.03	5.27	V	-38.08	62.55
	15 006.00	-49.62	10.52	-38.37	6.67	V	-34.52	58.98
40620 (2593.0)	5 186.00	-51.40	12.44	-59.92	3.70	V	-51.17	75.64
	7 779.00	-43.32	11.40	-44.15	4.54	H	-37.29	61.76
	10 372.00	-52.89	11.40	-47.84	5.45	H	-41.89	66.36
	15 558.00	-48.65	14.92	-40.33	6.80	H	-32.21	56.68
41540 (2685.0)	5 370.00	-46.92	13.00	-56.04	3.77	H	-46.81	71.28
	8 055.00	-41.43	10.80	-39.91	4.61	H	-33.71	58.18
	10 740.00	-46.30	11.22	-41.59	5.52	H	-35.89	60.36
	16 110.00	-49.57	15.92	-40.61	6.94	H	-31.63	56.10

- ▣ OPERATING FREQUENCY : 2682.5 MHz
- ▣ MEASURED OUTPUT POWER: 24.78 dBm = 0.301 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 49.78 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39725 (2503.5)	5 007.00	-47.28	12.58	-57.03	3.59	V	-48.04	72.82
	7 510.50	-42.73	10.82	-43.60	4.48	V	-37.26	62.04
	10 014.00	-48.56	11.23	-44.08	5.27	V	-38.12	62.90
	15 021.00	-49.90	11.58	-39.37	6.67	V	-34.46	59.24
40620 (2593.0)	5 186.00	-51.98	12.44	-60.50	3.70	V	-51.75	76.53
	7 779.00	-43.55	11.40	-44.38	4.54	H	-37.52	62.30
	10 372.00	-51.57	11.40	-46.52	5.45	V	-40.57	65.35
	15 558.00	-48.17	14.92	-39.85	6.80	H	-31.73	56.51
41515 (2682.5)	5 365.00	-48.68	13.00	-57.86	3.77	H	-48.63	73.41
	8 047.50	-40.42	10.80	-38.93	4.60	H	-32.73	57.51
	10 730.00	-46.45	11.24	-42.21	5.50	V	-36.47	61.25
	16 095.00	-48.72	15.89	-40.13	6.95	H	-31.19	55.97

- ▣ OPERATING FREQUENCY : 2680.0 MHz
- ▣ MEASURED OUTPUT POWER: 24.62 dBm = 0.290 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 49.62 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39750 (2506.0)	5 012.00	-46.99	12.58	-56.74	3.59	V	-47.75	72.37
	7 518.00	-43.72	10.84	-44.28	4.46	V	-37.90	62.52
	10 024.00	-49.28	11.25	-44.89	5.28	V	-38.92	63.54
	15 036.00	-50.54	11.64	-40.47	6.67	V	-35.50	60.12
40620 (2593.0)	5 186.00	-46.08	12.44	-54.60	3.70	V	-45.85	70.47
	7 779.00	-41.24	11.40	-42.07	4.54	H	-35.21	59.83
	10 372.00	-54.32	11.40	-49.27	5.45	V	-43.32	67.94
	15 558.00	-48.50	14.92	-40.18	6.80	H	-32.06	56.68
41490 (2680.0)	5 360.00	-50.45	13.00	-59.69	3.76	H	-50.45	75.07
	8 040.00	-39.58	10.80	-38.10	4.59	H	-31.89	56.51
	10 720.00	-46.20	11.26	-42.22	5.50	H	-36.46	61.08
	13 400.00	-54.75	12.70	-46.16	6.18	V	-39.64	64.26
	16 080.00	-49.26	15.86	-40.43	6.95	H	-31.52	56.14

8.3 PEAK-TO-AVERAGE RATIO

8.3.1 Power Class 3

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
41/38	5 MHz	2593.0	QPSK	25	0	5.15
			16-QAM			6.38
			64-QAM			6.95
			256-QAM			7.01
	10 MHz		QPSK	50		5.11
			16-QAM			6.28
			64-QAM			7.32
			256-QAM			7.17
	15 MHz		QPSK	75		5.07
			16-QAM			5.99
			64-QAM			7.08
			256-QAM			7.36
	20 MHz		QPSK	100		5.08
			16-QAM			5.95
			64-QAM			6.73
			256-QAM			6.88

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 110 ~ 125.

8.3.2 Power Class 2

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
41	5 MHz	2593.0	QPSK	25	0	5.27
			16-QAM			6.64
			64-QAM			7.14
			256-QAM			7.10
	10 MHz		QPSK	50		5.34
			16-QAM			6.58
			64-QAM			6.74
			256-QAM			7.33
	15 MHz		QPSK	75		5.27
			16-QAM			5.89
			64-QAM			6.76
			256-QAM			7.10
	20 MHz		QPSK	100		5.26
			16-QAM			6.13
			64-QAM			6.73
			256-QAM			6.74

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 126 ~ 141.

8.4 OCCUPIED BANDWIDTH

8.4.1 Power Class 3

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
41/38	5 MHz	2593.0	QPSK	25	0	4.4935
			16-QAM			4.5011
			64-QAM			4.5060
			256-QAM			4.4981
	10 MHz		QPSK	50		8.9714
			16-QAM			8.9781
			64-QAM			8.9644
			256-QAM			8.9724
	15 MHz		QPSK	75		13.426
			16-QAM			13.465
			64-QAM			13.386
			256-QAM			13.464
	20 MHz		QPSK	100		17.968
			16-QAM			17.904
			64-QAM			17.891
			256-QAM			17.888

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 78 ~ 93.

8.4.2 Power Class 2

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
41	5 MHz	2593.0	QPSK	25	0	4.5043
			16-QAM			4.5024
			64-QAM			4.4938
			256-QAM			4.4949
	10 MHz		QPSK	50		8.9639
			16-QAM			8.9932
			64-QAM			8.9725
			256-QAM			8.9527
	15 MHz		QPSK	75		13.450
			16-QAM			13.458
			64-QAM			13.442
			256-QAM			13.432
	20 MHz		QPSK	100		17.920
			16-QAM			17.898
			64-QAM			17.884
			256-QAM			17.887

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 94 ~ 109.

8.5 CONDUCTED SPURIOUS EMISSIONS

8.5.1 Power Class 3

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
41/38	5	2498.5	26.3429	34.110	-76.522	-42.412	-25.00
		2502.5	5.0005	32.570	-77.577	-45.007	
		2593.0	26.1041	34.110	-76.342	-42.232	
		2687.5	26.1674	34.110	-76.153	-42.043	
	10	2501.0	26.1241	34.110	-76.512	-42.402	
		2505.0	5.0010	32.570	-77.387	-44.817	
		2593.0	26.1466	34.110	-76.110	-42.000	
		2685.0	26.1674	34.110	-76.756	-42.646	
	15	2503.5	26.1287	34.110	-76.700	-42.590	
		2507.5	5.0015	32.570	-78.362	-45.792	
		2593.0	26.1576	34.110	-76.683	-42.573	
		2682.5	26.1330	34.110	-76.689	-42.579	
	20	2506.0	26.1253	34.110	-76.713	-42.603	
		2510.0	5.0020	32.570	-77.699	-45.129	
		2593.0	26.1049	34.110	-76.658	-42.548	
		2680.0	26.1457	34.110	-76.191	-42.081	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 214 ~ 245.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Duty Cycle factor already applied on the factor.

- Duty Cycle factor(dB) = 3.979

- Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter

- Result(dBm) = Measurement Maximum Data (dBm) + Factor

Frequency Range (GHz)	Factor [dB]
0.03 – 1	29.249
1 – 5	31.955
5 – 10	32.570
10 – 15	33.095
15 – 20	33.468
Above 20	34.110

8.5.2 Power Class 2

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
41	5	2498.5	26.1389	34.110	-76.589	-42.479	-25.00
		2593.0	26.1636	34.110	-76.463	-42.353	
		2687.5	26.1491	34.110	-76.467	-42.357	
	10	2501.0	26.2163	34.110	-76.657	-42.547	
		2593.0	26.1972	34.110	-76.724	-42.614	
		2685.0	26.1462	34.110	-76.545	-42.435	
	15	2503.5	25.9362	34.110	-76.656	-42.546	
		2593.0	26.1513	34.110	-76.478	-42.368	
		2682.5	26.1207	34.110	-76.431	-42.321	
	20	2506.0	26.1423	34.110	-76.643	-42.533	
		2593.0	26.1496	34.110	-76.083	-41.973	
		2680.0	26.1355	34.110	-76.534	-42.424	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 246 ~ 269.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Duty Cycle factor already applied on the factor.
 - Duty Cycle factor(dB) = 3.979
 - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
 - Result(dBm) = Measurement Maximum Data (dBm) + Factor

Frequency Range (GHz)	Factor [dB]
0.03 – 1	29.249
1 – 5	31.955
5 – 10	32.570
10 – 15	33.095
15 – 20	33.468
Above 20	34.110

8.6 CHANNEL EDGE

8.6.1 Power Class 3

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Lower
5 MHz	2498.5	QPSK	25/0	-27.24	-27.00	-24.24	-25.29	-32.41	-31.11	-32.46
10 MHz	2501.0	QPSK	50/0	-28.74	-28.51	-25.56	-25.49	-31.76	-30.72	-33.36
15 MHz	2503.5	QPSK	75/0	-29.88	-29.81	-27.08	-27.21	-32.25	-31.05	-36.06
20 MHz	2506.0	QPSK	100/0	-31.67	-31.76	-29.75	-30.13	-33.83	-33.26	-36.86
Limit				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Lower
5 MHz	2502.5	QPSK	25/0	-23.70	-27.15	-27.24	-24.29	-37.78	-30.25	-31.98
10 MHz	2505.0	QPSK	50/0	-23.78	-29.51	-29.82	-25.33	-37.27	-31.67	-34.82
15 MHz	2507.5	QPSK	75/0	-25.89	-29.04	-28.63	-26.58	-31.51	-30.34	-32.93
20 MHz	2510.0	QPSK	100/0	-28.78	-29.98	-31.27	-29.34	-34.10	-31.62	-35.47
Limit				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-27.63	-27.08	-25.17	-26.20
	2687.5	QPSK	25	0	-26.65	-26.43	-21.86	-22.23
10 MHz	2593.0	QPSK	50	0	-28.39	-28.62	-25.04	-25.94
	2685.0	QPSK	50	0	-27.61	-27.53	-22.48	-22.84
15 MHz	2593.0	QPSK	75	0	-29.98	-30.58	-28.49	-29.07
	2682.5	QPSK	75	0	-27.57	-27.40	-23.62	-23.90
20 MHz	2593.0	QPSK	100	0	-31.60	-31.94	-30.39	-31.89
	2680.0	QPSK	100	0	-27.01	-28.32	-24.23	-25.87
Limit					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-30.76	-30.89	-32.96	-32.45
	2687.5	QPSK	25	0	-36.46	-34.81	-36.44	-35.44
10 MHz	2593.0	QPSK	50	0	-30.10	-29.51	-32.90	-32.98
	2685.0	QPSK	50	0	-29.61	-27.95	-38.08	-36.60
15 MHz	2593.0	QPSK	75	0	-31.85	-31.81	-36.10	-35.61
	2682.5	QPSK	75	0	-28.54	-26.80	-39.11	-38.27
20 MHz	2593.0	QPSK	100	0	-33.46	-33.81	-37.78	-36.98
	2680.0	QPSK	100	0	-28.31	-28.12	-39.11	-40.15
Limit					-13.0		-25.0	

Note:

1. C.E = Channel Edge
2. X = X is the greater of 6 MHz or the actual emission bandwidth.
3. X = 6 MHz(5 MHz Bandwidth), 10 MHz(10 MHz Bandwidth), 15 MHz(15 MHz Bandwidth), 20 MHz(20 MHz Bandwidth)
4. Plots of the EUT's Channel Edge are shown Page 142 ~ 185. (1RB & Full RB)

8.6.2 Power Class 2

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Lower
5 MHz	2498.5	QPSK	25/0	-27.23	-26.90	-24.67	-24.95	-32.12	-31.11	-32.31
10 MHz	2501.0	QPSK	50/0	-27.67	-27.69	-24.12	-25.06	-30.90	-29.95	-33.66
15 MHz	2503.5	QPSK	75/0	-32.93	-32.82	-30.51	-31.06	-35.28	-34.20	-37.61
20 MHz	2506.0	QPSK	100/0	-33.88	-33.74	-32.12	-31.93	-35.45	-34.79	-37.25
Limit				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-24.27	-24.45	-20.52	-21.79
	2687.5	QPSK	25	0	-23.08	-23.03	-18.06	-18.91
10 MHz	2593.0	QPSK	50	0	-26.14	-26.47	-21.63	-22.56
	2685.0	QPSK	50	0	-23.78	-22.90	-18.84	-18.84
15 MHz	2593.0	QPSK	75	0	-27.15	-27.36	-23.62	-23.76
	2682.5	QPSK	75	0	-23.81	-23.78	-19.87	-20.21
20 MHz	2593.0	QPSK	100	0	-27.61	-28.10	-25.14	-26.25
	2680.0	QPSK	100	0	-23.06	-23.95	-20.44	-21.95
Limit					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-32.36	-32.02	-33.32	-33.09
	2687.5	QPSK	25	0	-27.77	-26.13	-29.37	-29.28
10 MHz	2593.0	QPSK	50	0	-28.83	-28.46	-35.00	-34.79
	2685.0	QPSK	50	0	-24.97	-25.13	-30.22	-29.40
15 MHz	2593.0	QPSK	75	0	-27.91	-27.73	-37.53	-37.18
	2682.5	QPSK	75	0	-23.94	-24.11	-31.51	-31.47
20 MHz	2593.0	QPSK	100	0	-28.89	-28.85	-38.61	-37.08
	2680.0	QPSK	100	0	-23.63	-24.98	-32.28	-34.16
Limit					-13.0		-25.0	

Note:


1. C.E = Channel Edge
2. X = X is the greater of 6MHz or the actual emission bandwidth.
3. X = 6 MHz(5 MHz Bandwidth), 10 MHz(10 MHz Bandwidth), 15 MHz(15 MHz Bandwidth), 20 MHz(20 MHz Bandwidth)
4. Plots of the EUT's Channel Edge are shown Page 186 ~ 213. (1RB & Full RB)

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

8.7.1 Power Class 3


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2498,500,000 Hz
- ▣ BANDWIDTH: 39675 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2498 500 007	0.0	0.000 000	0.000
100 %		-30	2498 499 992	-14.3	-0.000 001	-0.006
100 %		-20	2498 499 994	-12.5	-0.000 001	-0.005
100 %		-10	2498 499 990	-16.6	-0.000 001	-0.007
100 %		0	2498 499 995	-11.3	0.000 000	-0.005
100 %		+10	2498 500 002	-4.8	0.000 000	-0.002
100 %		+30	2498 500 010	3.9	0.000 000	0.002
100 %		+40	2498 500 013	6.1	0.000 000	0.002
100 %		+50	2498 500 013	6.3	0.000 000	0.003
Batt. Endpoint		3.650	+20	2498 499 994	-12.3	0.000 000

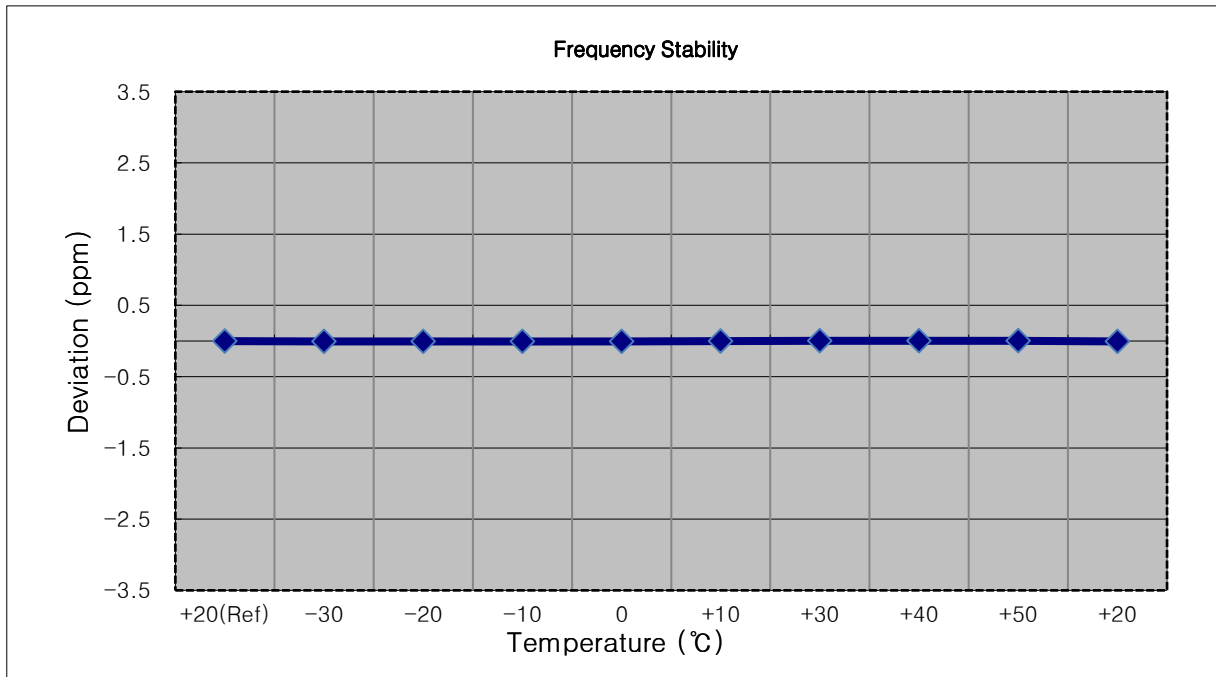


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2501,000,000 Hz
- ▣ BANDWIDTH: 39700 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2500 999 984	0.0	0.000 000	0.000
100 %		-30	2500 999 992	8.4	0.000 000	0.003
100 %		-20	2500 999 981	-3.0	0.000 000	-0.001
100 %		-10	2500 999 997	12.9	0.000 001	0.005
100 %		0	2500 999 997	13.4	0.000 001	0.005
100 %		+10	2500 999 988	3.8	0.000 000	0.002
100 %		+30	2500 999 991	6.5	0.000 000	0.003
100 %		+40	2500 999 966	-18.4	-0.000 001	-0.007
100 %		+50	2500 999 965	-18.6	-0.000 001	-0.007
Batt. Endpoint	3.650	+20	2500 999 973	-10.9	0.000 000	-0.004

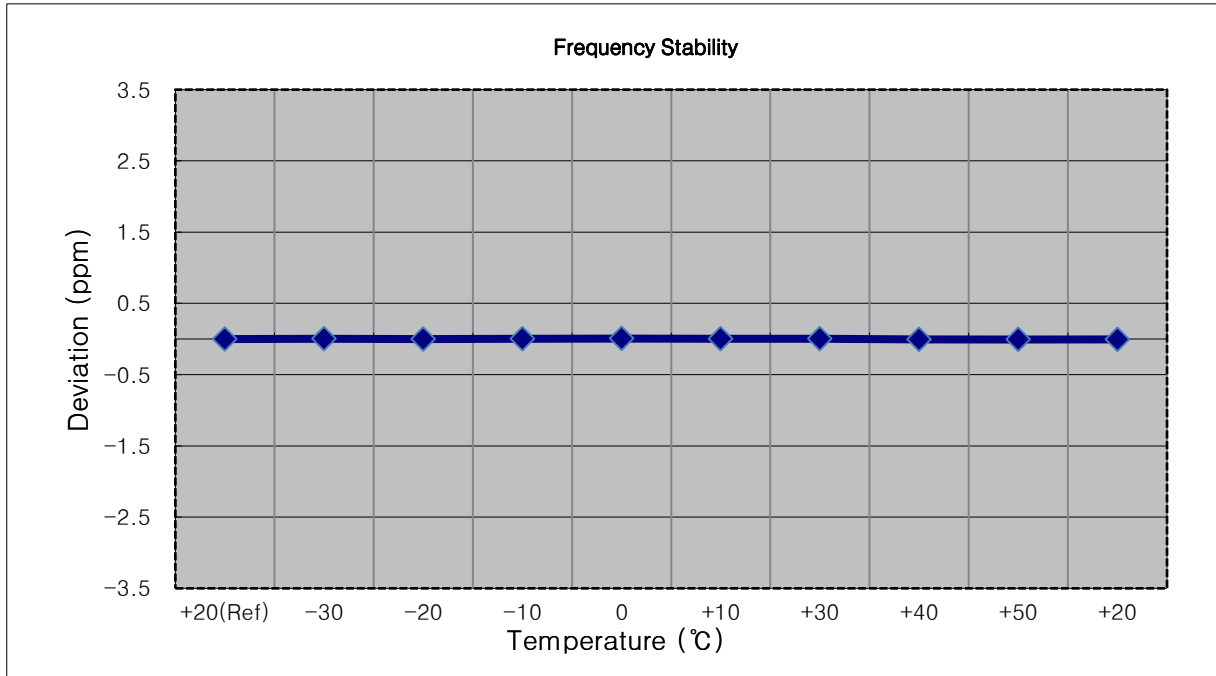


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2503,500,000 Hz
- ▣ BANDWIDTH: 39725 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2503 500 007	0.0	0.000 000	0.000
100 %		-30	2503 500 002	-5.1	0.000 000	-0.002
100 %		-20	2503 500 010	3.0	0.000 000	0.001
100 %		-10	2503 500 010	2.8	0.000 000	0.001
100 %		0	2503 500 011	4.5	0.000 000	0.002
100 %		+10	2503 500 002	-4.7	0.000 000	-0.002
100 %		+30	2503 499 999	-7.3	0.000 000	-0.003
100 %		+40	2503 500 019	12.3	0.000 000	0.005
100 %		+50	2503 500 020	13.3	0.000 001	0.005
Batt. Endpoint	3.650	+20	2503 500 020	13.1	0.000 001	0.005

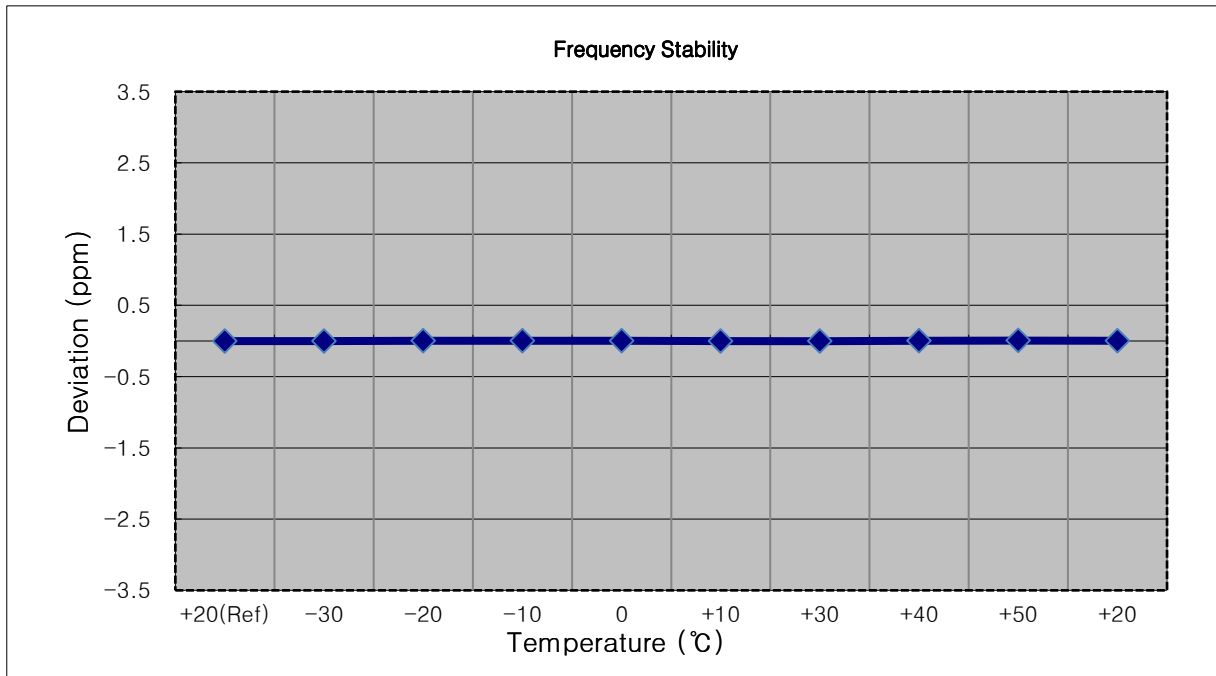


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2506,000,000 Hz
- ▣ BANDWIDTH: 39750 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2505 999 987	0.0	0.000 000	0.000
100 %		-30	2505 999 977	-9.9	0.000 000	-0.004
100 %		-20	2505 999 999	12.2	0.000 000	0.005
100 %		-10	2506 000 000	13.5	0.000 001	0.005
100 %		0	2506 000 001	14.0	0.000 001	0.006
100 %		+10	2505 999 999	12.5	0.000 000	0.005
100 %		+30	2505 999 980	-6.9	0.000 000	-0.003
100 %		+40	2506 000 006	19.7	0.000 001	0.008
100 %		+50	2505 999 978	-8.6	0.000 000	-0.003
Batt. Endpoint		3.650	+20	2505 999 997	10.4	0.000 000

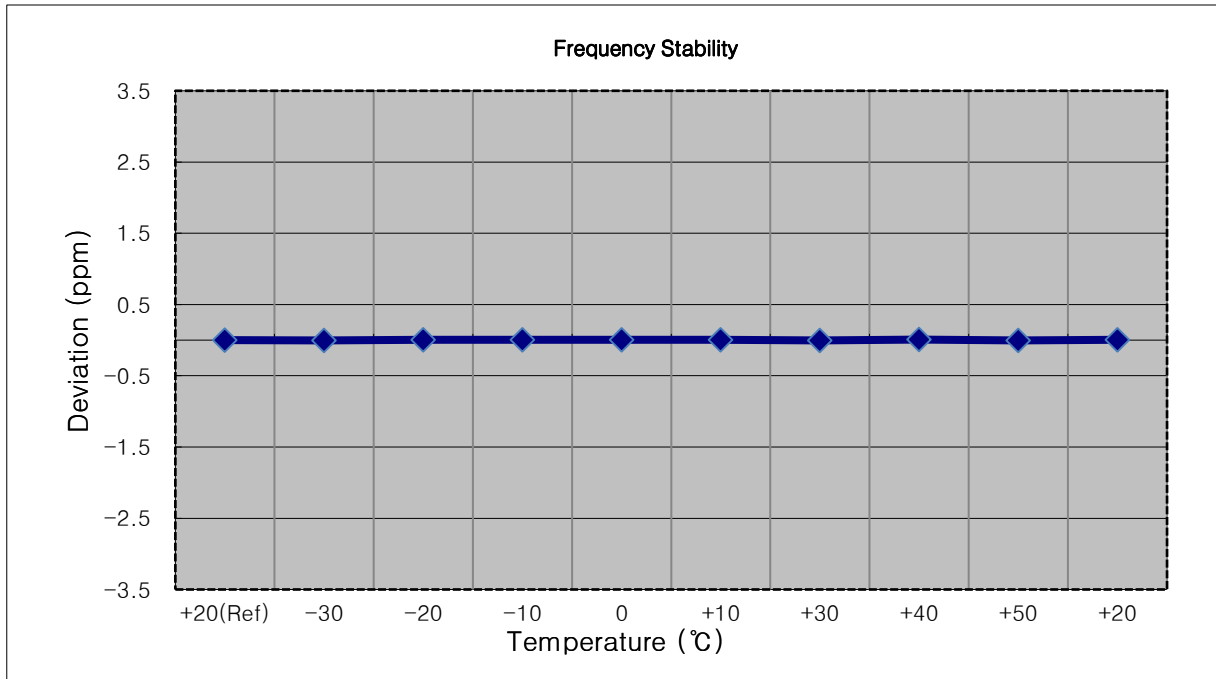


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2502,500,000 Hz
- ▣ BANDWIDTH: 39715 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2502 500 002	0.0	0.000 000	0.000
100 %		-30	2502 500 004	2.2	0.000 000	0.001
100 %		-20	2502 500 004	2.6	0.000 000	0.001
100 %		-10	2502 499 998	-4.3	0.000 000	-0.002
100 %		0	2502 499 996	-5.5	0.000 000	-0.002
100 %		+10	2502 499 999	-2.8	0.000 000	-0.001
100 %		+30	2502 500 009	7.0	0.000 000	0.003
100 %		+40	2502 500 011	9.6	0.000 000	0.004
100 %		+50	2502 500 009	7.4	0.000 000	0.003
Batt. Endpoint		3.650	+20	2502 500 016	14.1	0.000 001

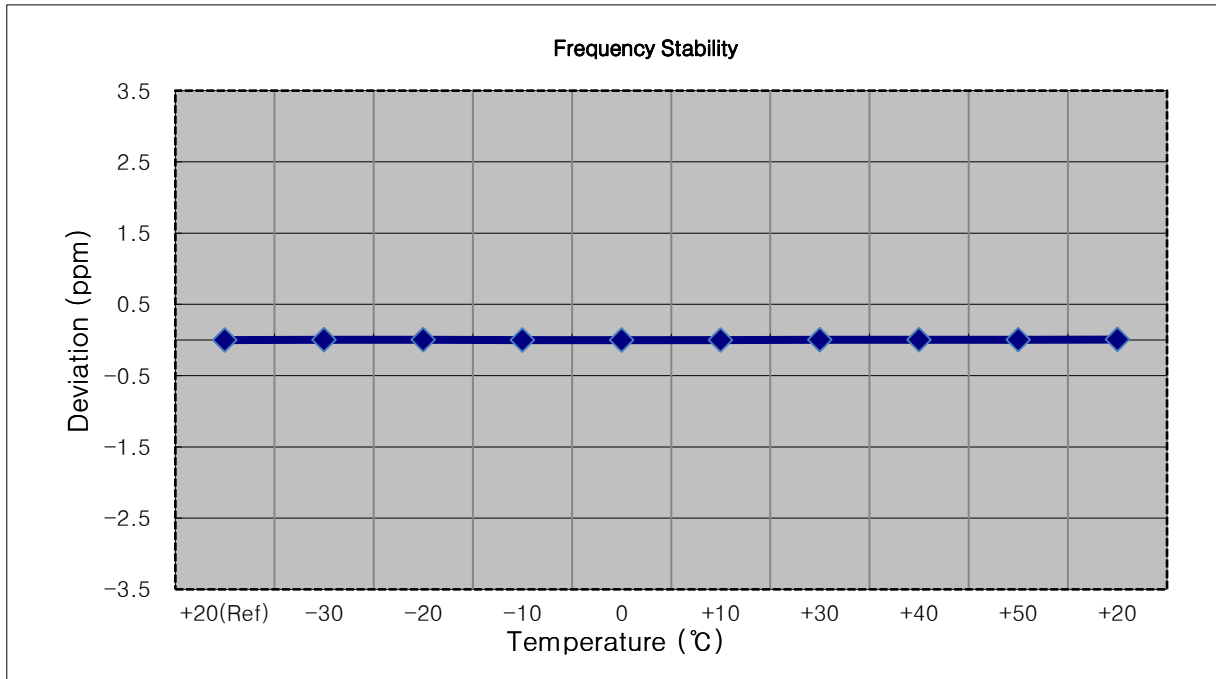


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2505,000,000 Hz
- ▣ BANDWIDTH: 39740 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2504 999 990	0.0	0.000 000	0.000
100 %		-30	2504 999 979	-10.9	0.000 000	-0.004
100 %		-20	2505 000 001	11.1	0.000 000	0.004
100 %		-10	2504 999 980	-9.9	0.000 000	-0.004
100 %		0	2504 999 996	6.2	0.000 000	0.002
100 %		+10	2504 999 997	6.6	0.000 000	0.003
100 %		+30	2504 999 978	-12.3	0.000 000	-0.005
100 %		+40	2504 999 977	-12.8	-0.000 001	-0.005
100 %		+50	2504 999 984	-5.9	0.000 000	-0.002
Batt. Endpoint	3.650	+20	2504 999 978	-12.4	0.000 000	-0.005

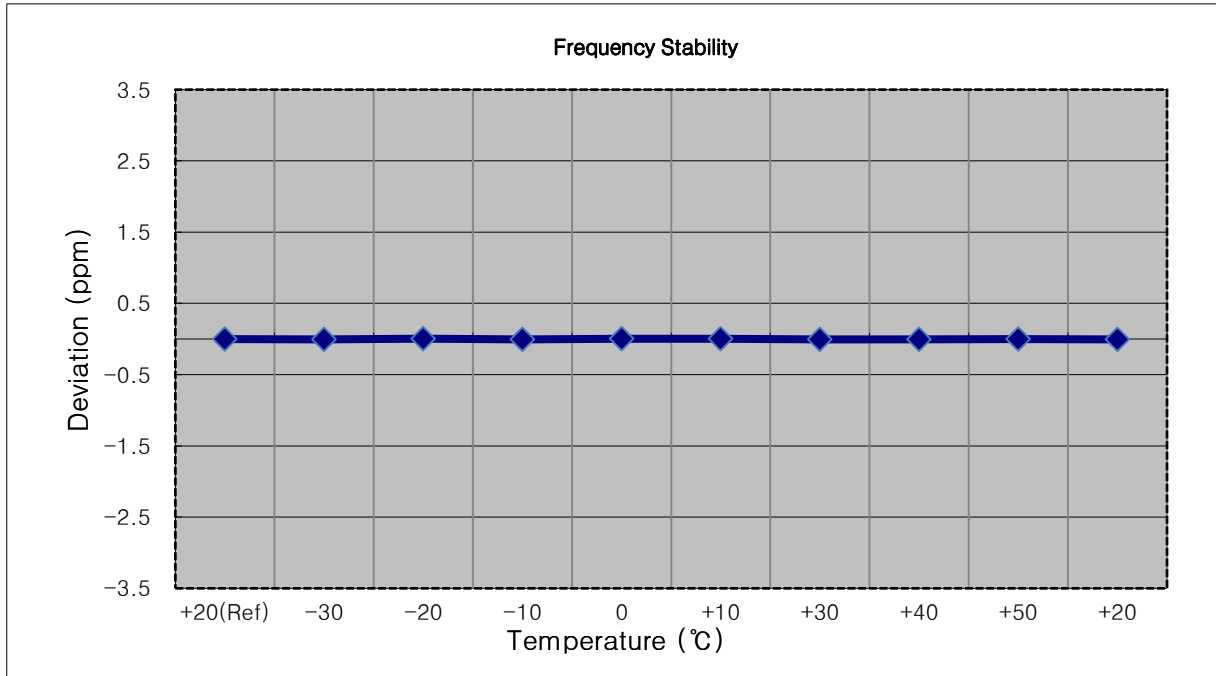


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2507,500,000 Hz
- ▣ BANDWIDTH: 39765 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2507 499 993	0.0	0.000 000	0.000
100 %		-30	2507 499 987	-6.1	0.000 000	-0.002
100 %		-20	2507 499 987	-5.7	0.000 000	-0.002
100 %		-10	2507 500 002	9.2	0.000 000	0.004
100 %		0	2507 499 985	-7.6	0.000 000	-0.003
100 %		+10	2507 499 983	-9.5	0.000 000	-0.004
100 %		+30	2507 499 985	-7.4	0.000 000	-0.003
100 %		+40	2507 499 980	-12.3	0.000 000	-0.005
100 %		+50	2507 499 998	5.0	0.000 000	0.002
Batt. Endpoint	3.650	+20	2507 500 004	10.9	0.000 000	0.004

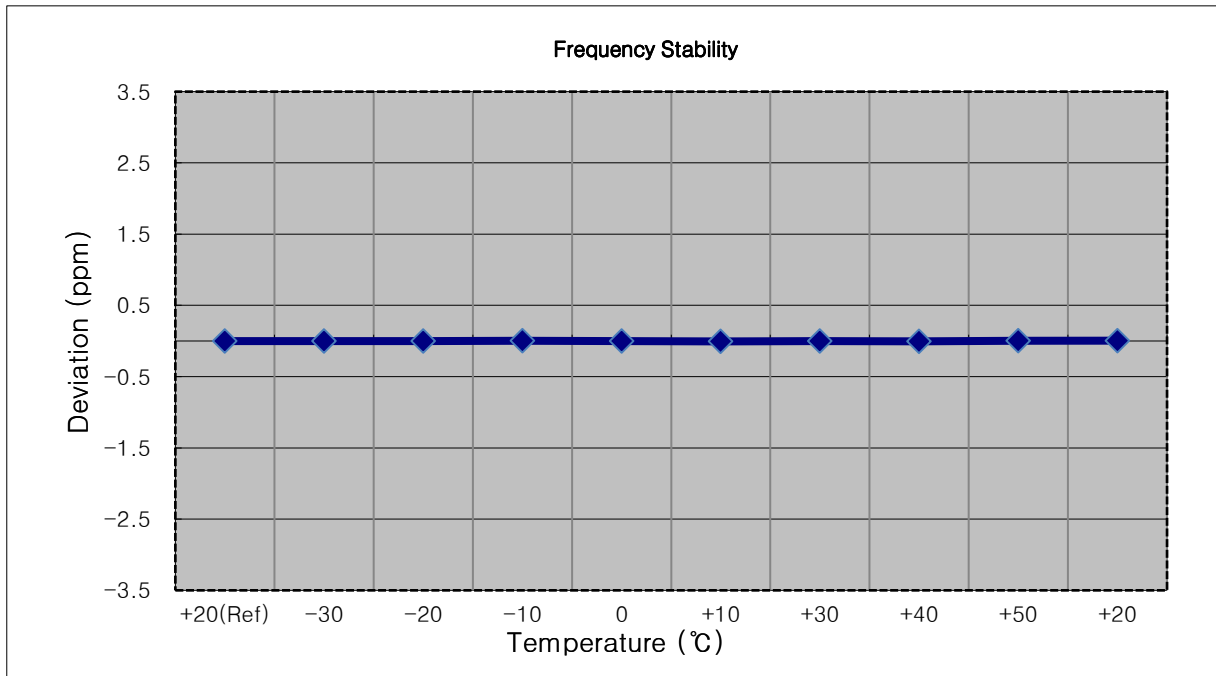


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2510,000,000 Hz
- ▣ BANDWIDTH: 39790 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2509 999 995	0.0	0.000 000	0.000
100 %		-30	2509 999 989	-5.8	0.000 000	-0.002
100 %		-20	2509 999 985	-9.3	0.000 000	-0.004
100 %		-10	2509 999 986	-8.5	0.000 000	-0.003
100 %		0	2509 999 984	-10.8	0.000 000	-0.004
100 %		+10	2510 000 004	9.7	0.000 000	0.004
100 %		+30	2510 000 002	7.5	0.000 000	0.003
100 %		+40	2509 999 993	-1.7	0.000 000	-0.001
100 %		+50	2510 000 000	5.8	0.000 000	0.002
Batt. Endpoint	3.650	+20	2509 999 991	-3.7	0.000 000	-0.001

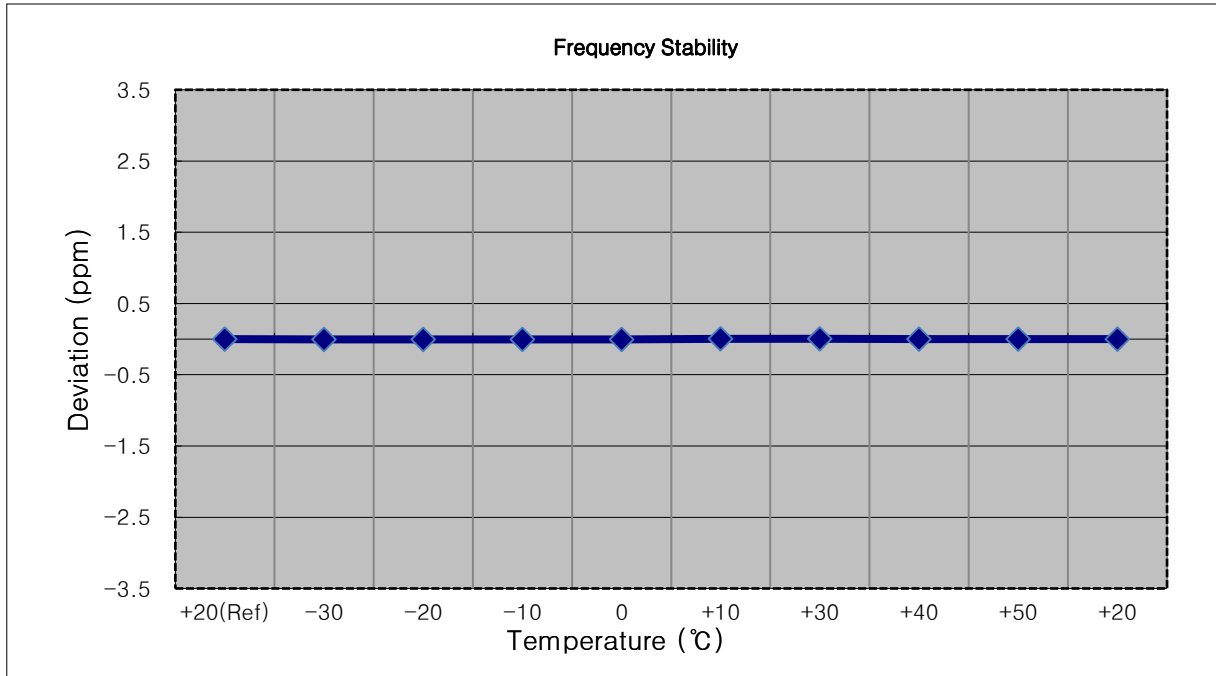


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2592 999 989	0.0	0.000 000	0.000
100 %		-30	2592 999 996	6.7	0.000 000	0.003
100 %		-20	2592 999 969	-20.5	-0.000 001	-0.008
100 %		-10	2592 999 969	-20.8	-0.000 001	-0.008
100 %		0	2592 999 981	-8.1	0.000 000	-0.003
100 %		+10	2592 999 976	-13.2	-0.000 001	-0.005
100 %		+30	2592 999 976	-13.0	-0.000 001	-0.005
100 %		+40	2592 999 970	-19.0	-0.000 001	-0.007
100 %		+50	2592 999 972	-17.9	-0.000 001	-0.007
Batt. Endpoint		3.650	+20	2592 999 967	-22.4	-0.000 001

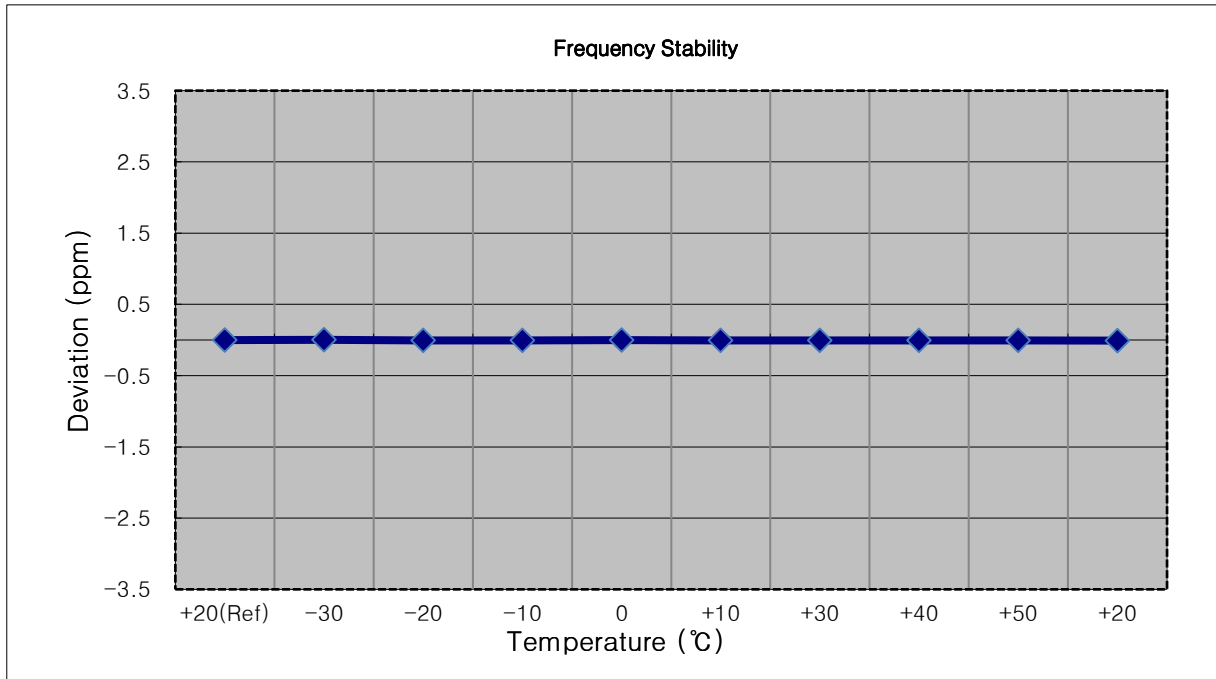


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2592 999 983	0.0	0.000 000	0.000
100 %		-30	2592 999 970	-12.7	0.000 000	-0.005
100 %		-20	2592 999 962	-21.1	-0.000 001	-0.008
100 %		-10	2592 999 970	-12.8	0.000 000	-0.005
100 %		0	2592 999 979	-4.6	0.000 000	-0.002
100 %		+10	2592 999 967	-16.2	-0.000 001	-0.006
100 %		+30	2592 999 974	-9.5	0.000 000	-0.004
100 %		+40	2592 999 970	-12.9	0.000 000	-0.005
100 %		+50	2592 999 988	5.1	0.000 000	0.002
Batt. Endpoint	3.650	+20	2592 999 965	-18.2	-0.000 001	-0.007

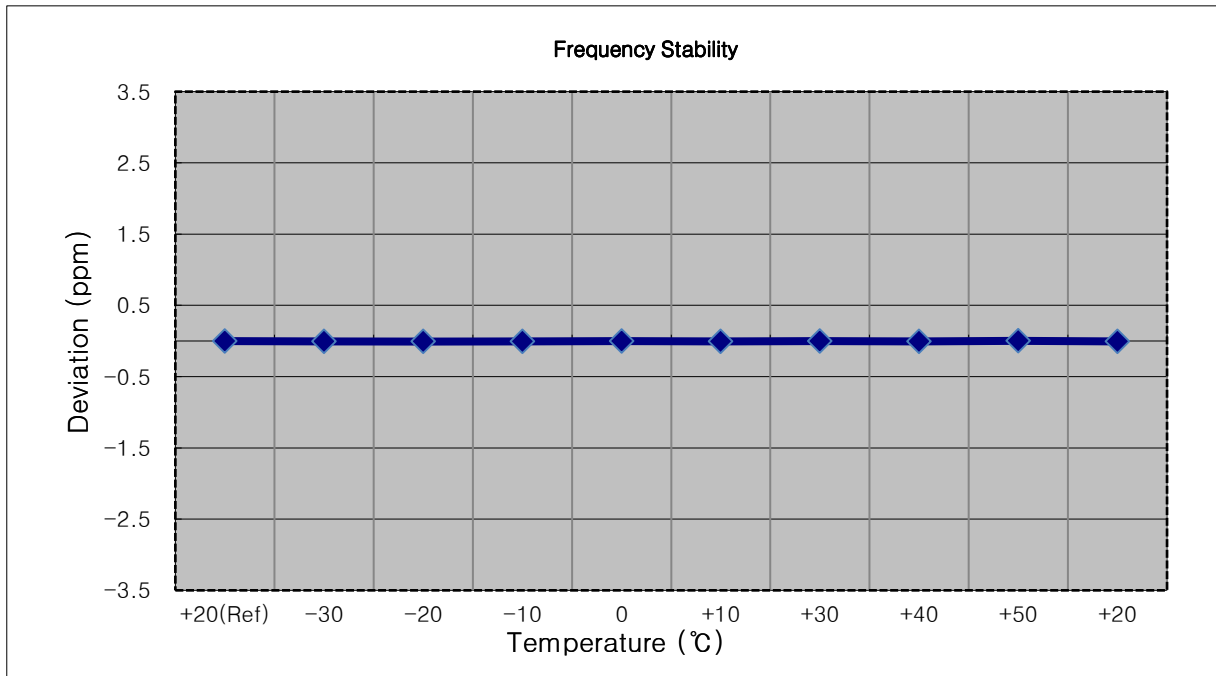


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2592 999 987	0.0	0.000 000	0.000
100 %		-30	2592 999 978	-8.5	0.000 000	-0.003
100 %		-20	2592 999 975	-11.4	0.000 000	-0.004
100 %		-10	2592 999 979	-7.9	0.000 000	-0.003
100 %		0	2592 999 975	-12.0	0.000 000	-0.005
100 %		+10	2592 999 963	-23.7	-0.000 001	-0.009
100 %		+30	2592 999 977	-9.2	0.000 000	-0.004
100 %		+40	2593 000 000	13.5	0.000 001	0.005
100 %		+50	2592 999 972	-14.6	-0.000 001	-0.006
Batt. Endpoint	3.650	+20	2592 999 976	-11.0	0.000 000	-0.004

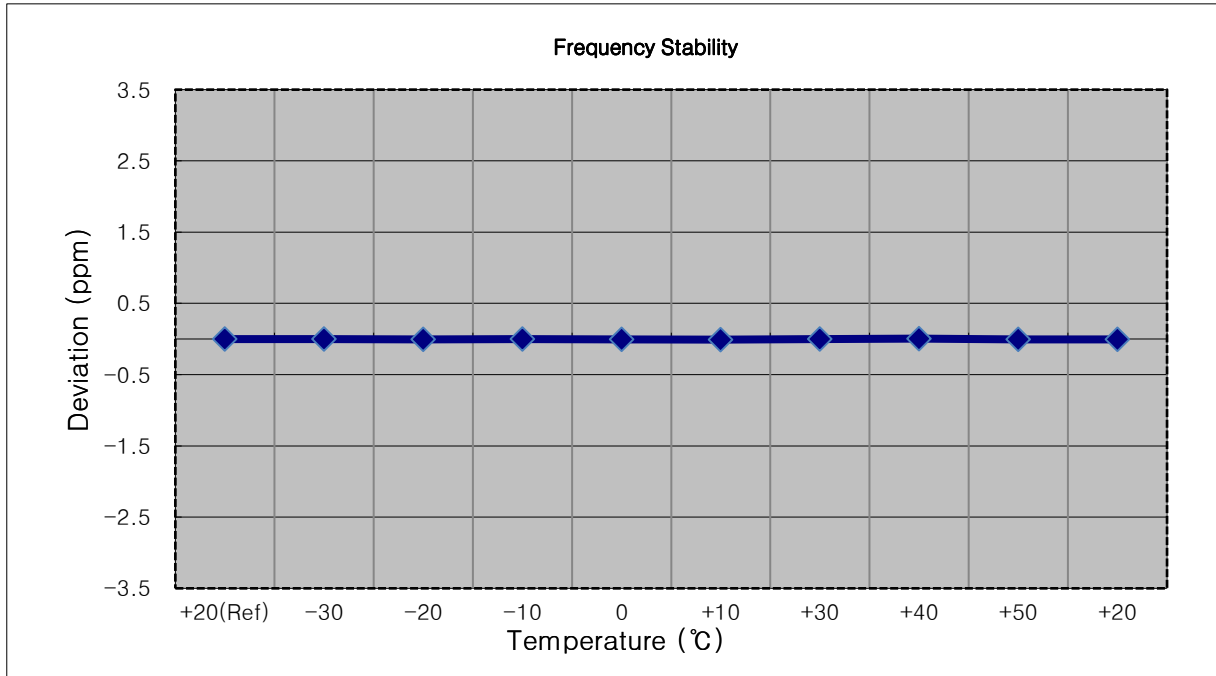


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2592 999 991	0.0	0.000 000	0.000
100 %		-30	2593 000 005	14.1	0.000 001	0.005
100 %		-20	2592 999 973	-18.1	-0.000 001	-0.007
100 %		-10	2592 999 982	-9.4	0.000 000	-0.004
100 %		0	2592 999 990	-1.2	0.000 000	0.000
100 %		+10	2592 999 975	-16.5	-0.000 001	-0.006
100 %		+30	2593 000 010	18.6	0.000 001	0.007
100 %		+40	2592 999 989	-2.6	0.000 000	-0.001
100 %		+50	2592 999 982	-9.3	0.000 000	-0.004
Batt. Endpoint	3.650	+20	2592 999 982	-9.1	0.000 000	-0.004

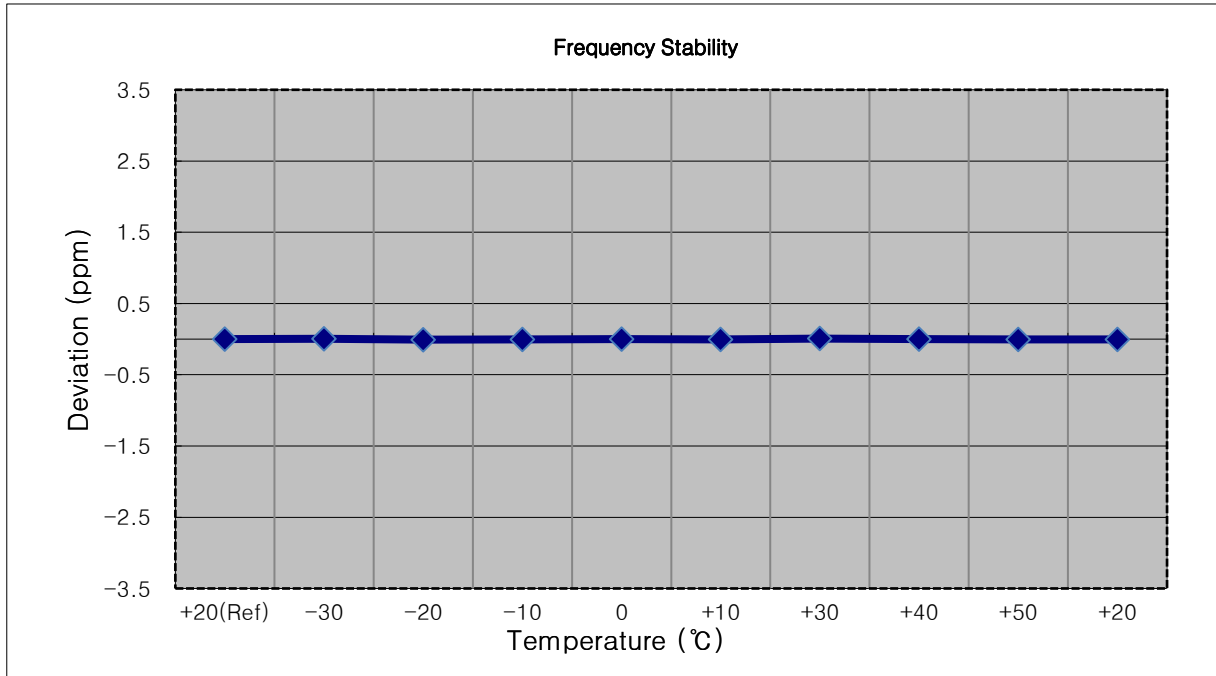


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2687,500,000 Hz
- ▣ BANDWIDTH: 41565 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2687 499 969	0.0	0.000 000	0.000
100 %		-30	2687 499 944	-25.1	-0.000 001	-0.009
100 %		-20	2687 499 945	-24.4	-0.000 001	-0.009
100 %		-10	2687 499 948	-21.6	-0.000 001	-0.008
100 %		0	2687 499 953	-16.8	-0.000 001	-0.006
100 %		+10	2687 499 945	-24.3	-0.000 001	-0.009
100 %		+30	2687 499 955	-14.1	-0.000 001	-0.005
100 %		+40	2687 499 950	-19.7	-0.000 001	-0.007
100 %		+50	2687 499 948	-21.5	-0.000 001	-0.008
Batt. Endpoint		3.650	+20	2687 499 953	-16.7	-0.000 001

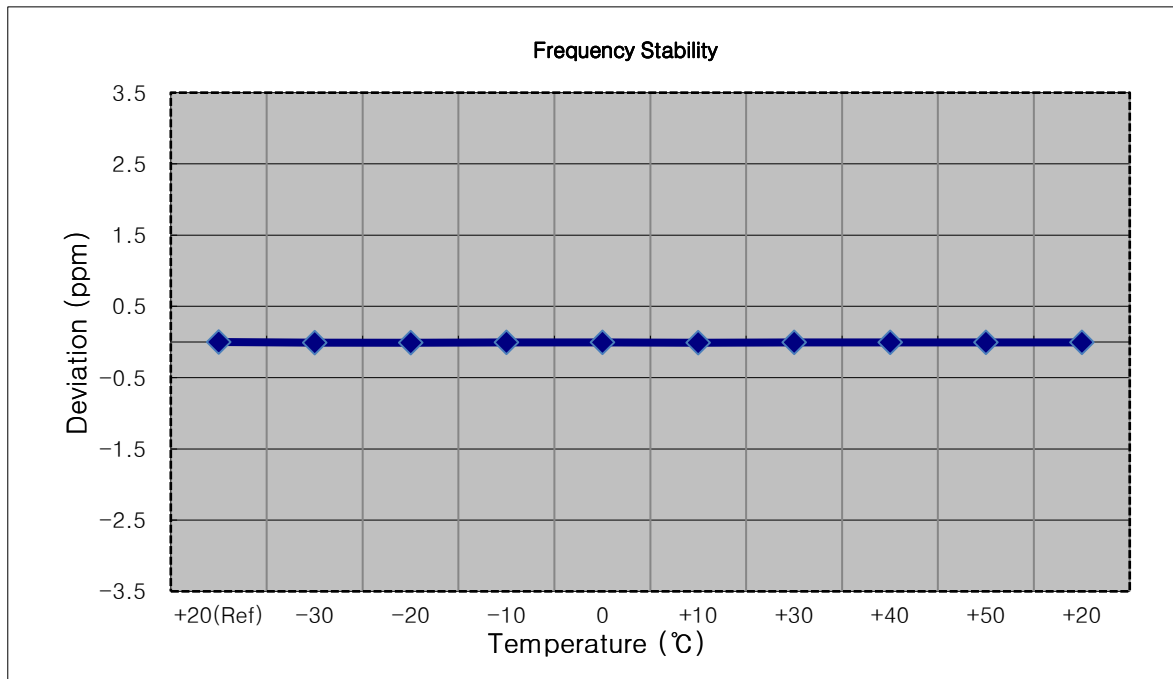


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2685,000,000 Hz
- ▣ BANDWIDTH: 41540 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2684 999 984	0.0	0.000 000	0.000
100 %		-30	2684 999 967	-17.0	-0.000 001	-0.006
100 %		-20	2684 999 966	-18.0	-0.000 001	-0.007
100 %		-10	2684 999 968	-15.8	-0.000 001	-0.006
100 %		0	2684 999 971	-12.6	0.000 000	-0.005
100 %		+10	2684 999 995	11.3	0.000 000	0.004
100 %		+30	2684 999 978	-5.6	0.000 000	-0.002
100 %		+40	2684 999 974	-10.2	0.000 000	-0.004
100 %		+50	2684 999 980	-4.2	0.000 000	-0.002
Batt. Endpoint	3.650	+20	2684 999 976	-8.1	0.000 000	-0.003

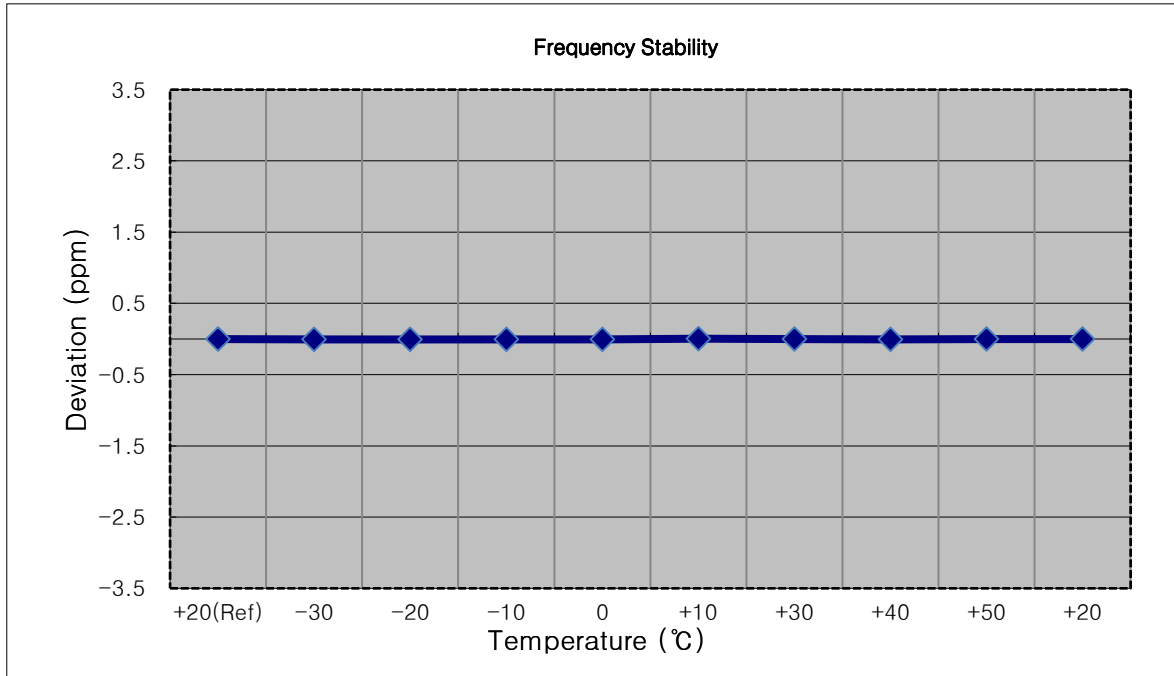


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2682,500,000 Hz
- ▣ BANDWIDTH: 41515 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2682 499 985	0.0	0.000 000	0.000
100 %		-30	2682 499 963	-21.2	-0.000 001	-0.008
100 %		-20	2682 499 979	-5.6	0.000 000	-0.002
100 %		-10	2682 499 973	-11.1	0.000 000	-0.004
100 %		0	2682 499 968	-17.0	-0.000 001	-0.006
100 %		+10	2682 499 960	-24.2	-0.000 001	-0.009
100 %		+30	2682 499 966	-18.8	-0.000 001	-0.007
100 %		+40	2682 499 975	-9.2	0.000 000	-0.003
100 %		+50	2682 499 979	-5.5	0.000 000	-0.002
Batt. Endpoint	3.650	+20	2682 499 977	-7.1	0.000 000	-0.003

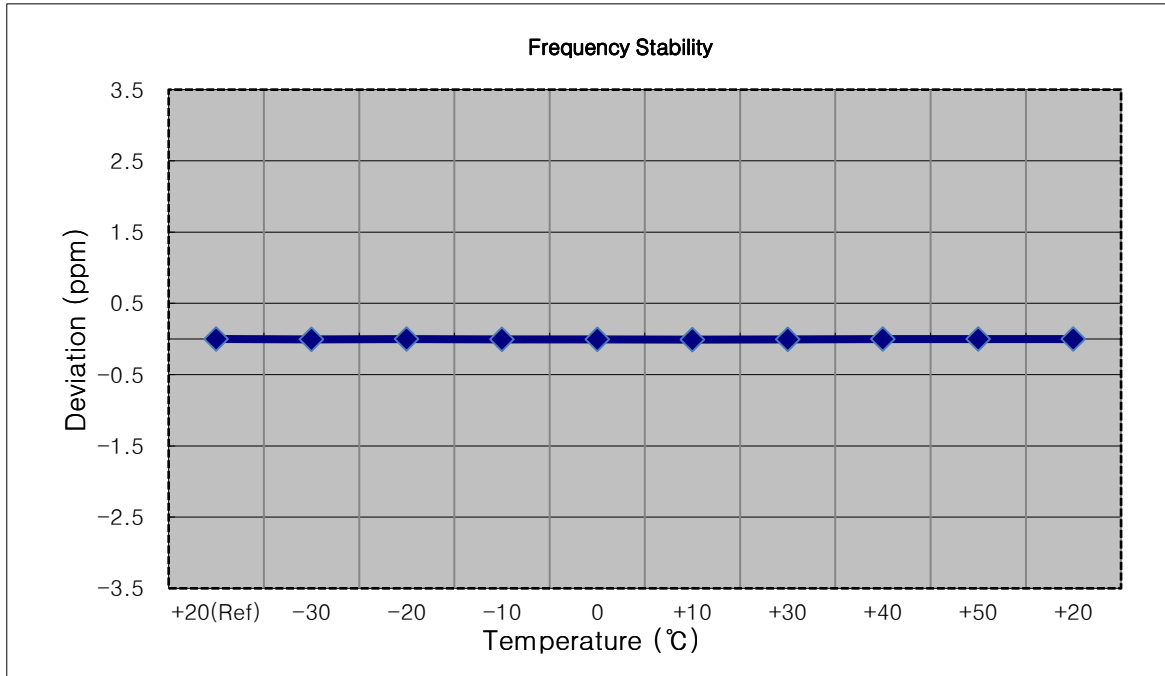

- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2680,000,000 Hz
- ▣ BANDWIDTH: 41490 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2679 999 987	0.0	0.000 000	0.000
100 %		-30	2679 999 980	-6.9	0.000 000	-0.003
100 %		-20	2679 999 974	-12.8	0.000 000	-0.005
100 %		-10	2679 999 970	-16.9	-0.000 001	-0.006
100 %		0	2680 000 000	13.0	0.000 000	0.005
100 %		+10	2679 999 980	-7.7	0.000 000	-0.003
100 %		+30	2679 999 974	-13.3	0.000 000	-0.005
100 %		+40	2679 999 989	1.7	0.000 000	0.001
100 %		+50	2679 999 973	-14.5	-0.000 001	-0.005
Batt. Endpoint	3.650	+20	2679 999 971	-15.9	-0.000 001	-0.006

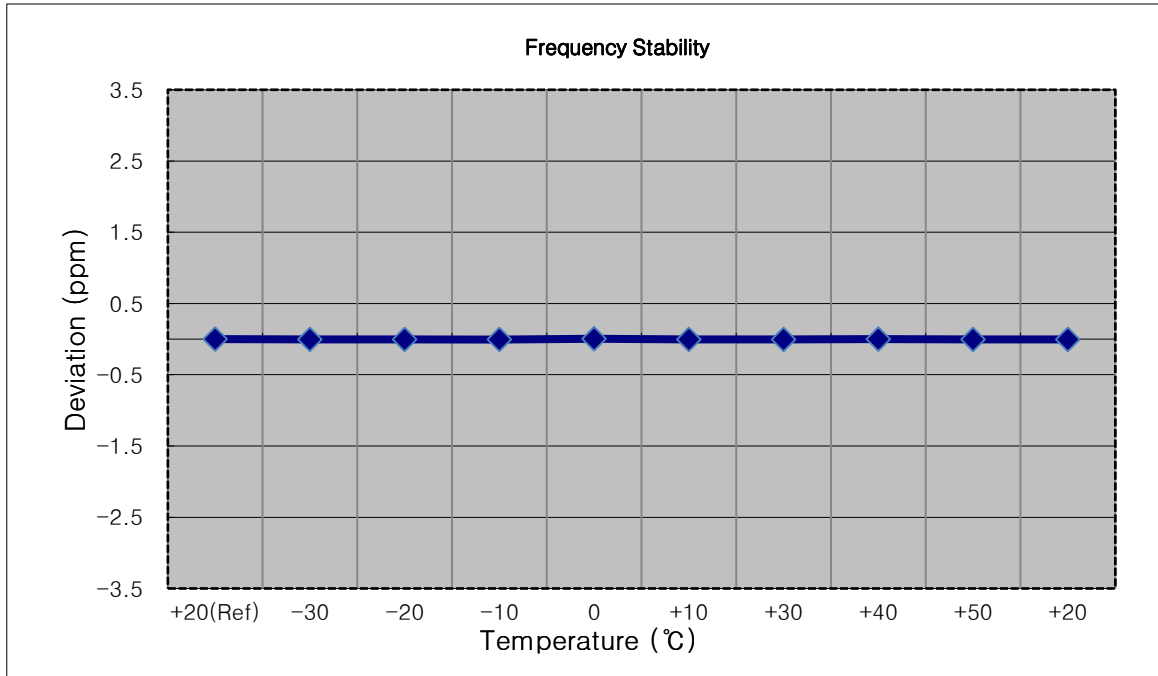

8.7.2 Power Class 2


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2498,500,000 Hz
- ▣ BANDWIDTH: 39675 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2498 500 007	0.0	0.000 000	0.000
100 %		-30	2498 500 015	8.2	0.000 000	0.003
100 %		-20	2498 500 000	-7.2	0.000 000	-0.003
100 %		-10	2498 499 999	-8.0	0.000 000	-0.003
100 %		0	2498 499 999	-7.9	0.000 000	-0.003
100 %		+10	2498 499 999	-7.7	0.000 000	-0.003
100 %		+30	2498 499 995	-11.7	0.000 000	-0.005
100 %		+40	2498 500 014	6.8	0.000 000	0.003
100 %		+50	2498 499 999	-7.5	0.000 000	-0.003
Batt. Endpoint		3.650	+20	2498 500 002	-4.7	0.000 000

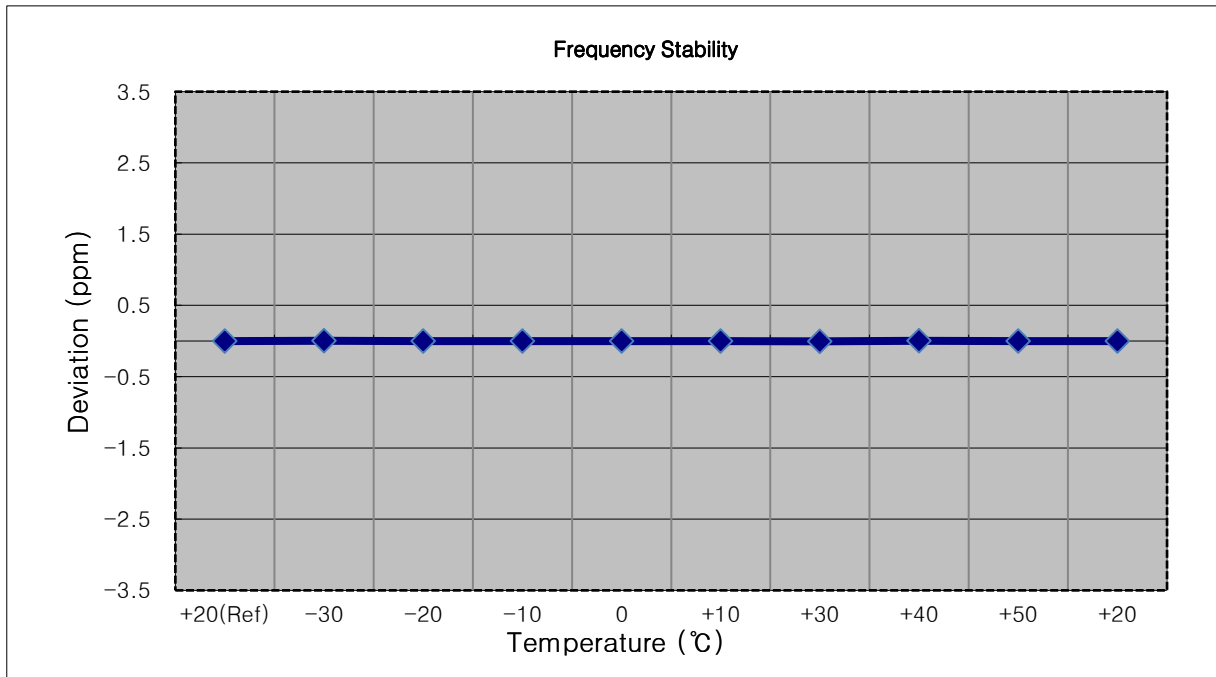


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2501,000,000 Hz
- ▣ BANDWIDTH: 39700 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2500 999 993	0.0	0.000 000	0.000
100 %		-30	2500 999 998	5.2	0.000 000	0.002
100 %		-20	2500 999 982	-11.0	0.000 000	-0.004
100 %		-10	2500 999 988	-4.3	0.000 000	-0.002
100 %		0	2500 999 997	3.9	0.000 000	0.002
100 %		+10	2500 999 982	-10.4	0.000 000	-0.004
100 %		+30	2500 999 987	-5.9	0.000 000	-0.002
100 %		+40	2500 999 987	-6.1	0.000 000	-0.002
100 %		+50	2500 999 983	-9.4	0.000 000	-0.004
Batt. Endpoint	3.650	+20	2500 999 999	6.0	0.000 000	0.002

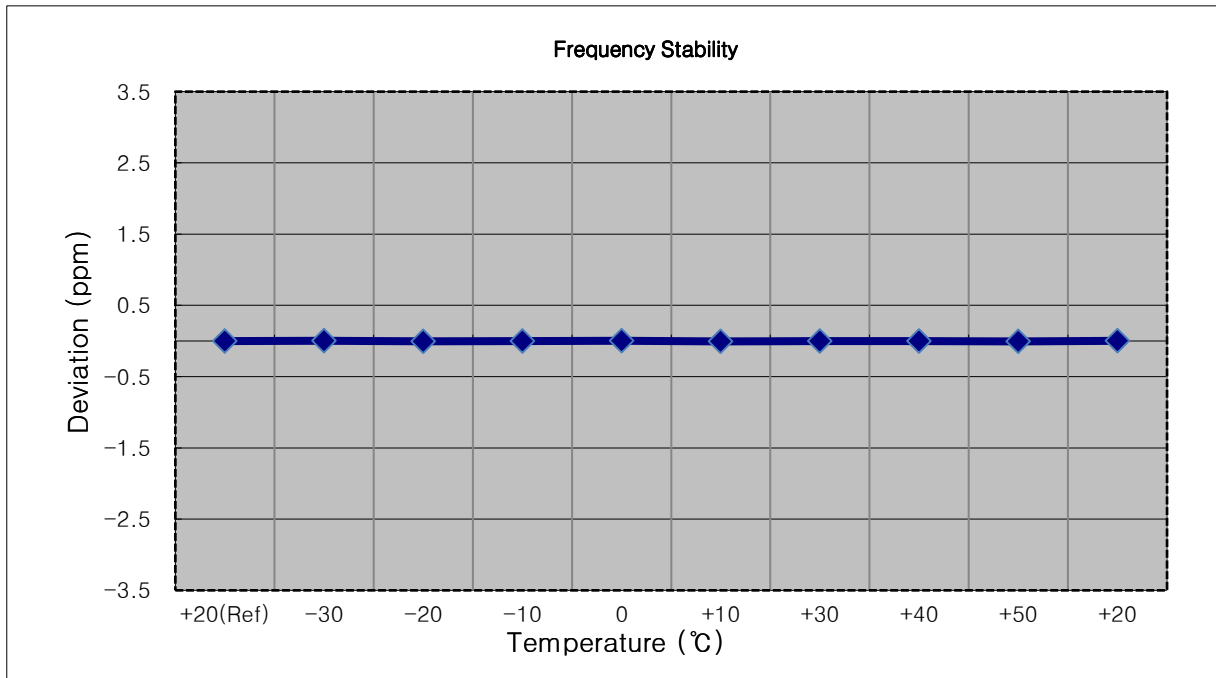


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2503,500,000 Hz
- ▣ BANDWIDTH: 39725 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2503 500 009	0.0	0.000 000	0.000
100 %		-30	2503 500 015	6.5	0.000 000	0.003
100 %		-20	2503 500 005	-3.6	0.000 000	-0.001
100 %		-10	2503 500 001	-7.8	0.000 000	-0.003
100 %		0	2503 499 999	-9.9	0.000 000	-0.004
100 %		+10	2503 499 997	-11.5	0.000 000	-0.005
100 %		+30	2503 500 015	5.9	0.000 000	0.002
100 %		+40	2503 500 002	-6.5	0.000 000	-0.003
100 %		+50	2503 499 997	-11.3	0.000 000	-0.005
Batt. Endpoint	3.650	+20	2503 500 007	-2.1	0.000 000	-0.001

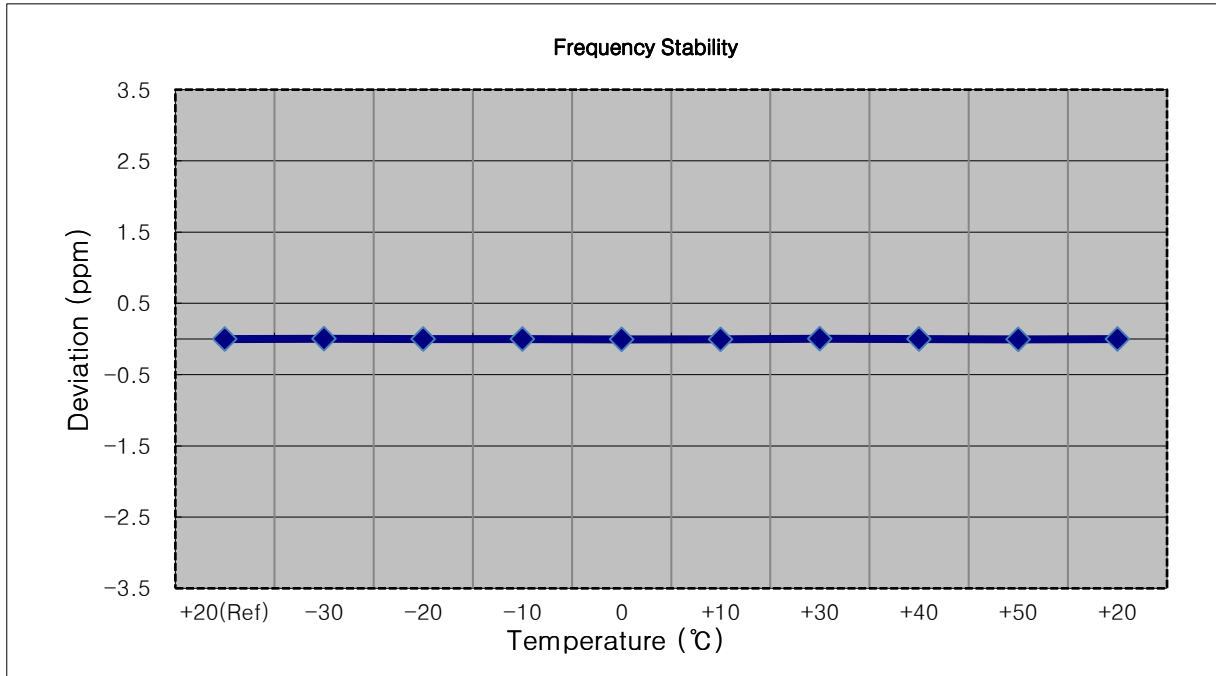


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2506,000,000 Hz
- ▣ BANDWIDTH: 39750 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2506 000 007	0.0	0.000 000	0.000
100 %		-30	2506 000 004	-2.6	0.000 000	-0.001
100 %		-20	2505 999 998	-8.2	0.000 000	-0.003
100 %		-10	2506 000 013	6.9	0.000 000	0.003
100 %		0	2506 000 004	-2.8	0.000 000	-0.001
100 %		+10	2505 999 997	-9.5	0.000 000	-0.004
100 %		+30	2506 000 011	4.5	0.000 000	0.002
100 %		+40	2505 999 998	-9.0	0.000 000	-0.004
100 %		+50	2506 000 000	-6.4	0.000 000	-0.003
Batt. Endpoint		3.650	+20	2505 999 999	-8.0	0.000 000

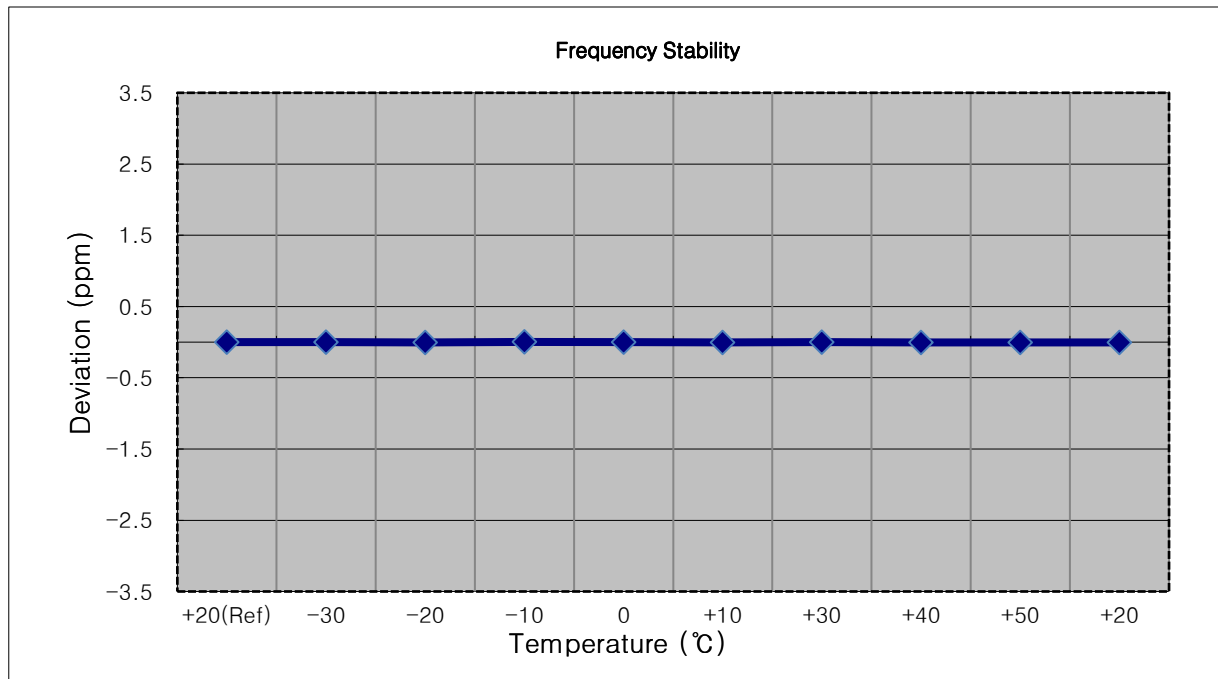


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2592 999 989	0.0	0.000 000	0.000
100 %		-30	2592 999 982	-7.9	0.000 000	-0.003
100 %		-20	2592 999 977	-12.5	0.000 000	-0.005
100 %		-10	2592 999 985	-4.3	0.000 000	-0.002
100 %		0	2592 999 972	-17.2	-0.000 001	-0.007
100 %		+10	2592 999 973	-16.6	-0.000 001	-0.006
100 %		+30	2592 999 974	-15.8	-0.000 001	-0.006
100 %		+40	2592 999 976	-13.0	-0.000 001	-0.005
100 %		+50	2592 999 985	-4.6	0.000 000	-0.002
Batt. Endpoint	3.650	+20	2592 999 979	-10.5	0.000 000	-0.004

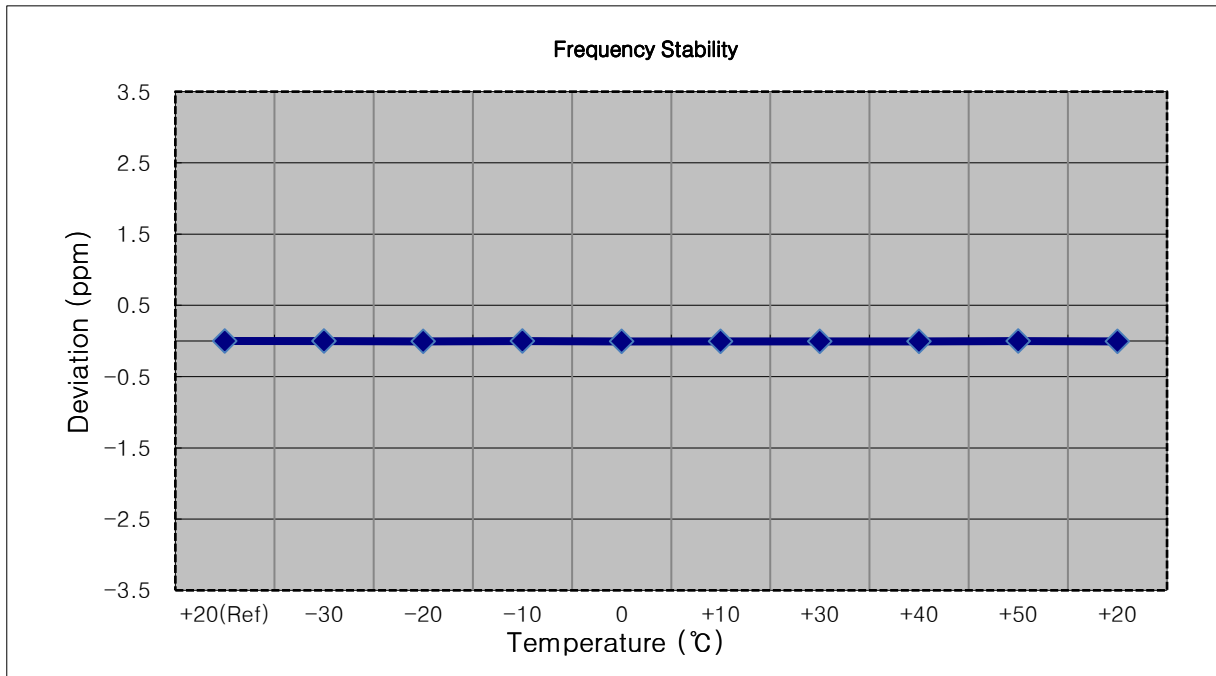


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2592 999 989	0.0	0.000 000	0.000
100 %		-30	2592 999 995	5.6	0.000 000	0.002
100 %		-20	2592 999 975	-14.0	-0.000 001	-0.005
100 %		-10	2592 999 981	-8.4	0.000 000	-0.003
100 %		0	2592 999 991	2.0	0.000 000	0.001
100 %		+10	2592 999 979	-10.0	0.000 000	-0.004
100 %		+30	2592 999 987	-2.2	0.000 000	-0.001
100 %		+40	2592 999 980	-9.6	0.000 000	-0.004
100 %		+50	2592 999 984	-5.5	0.000 000	-0.002
Batt. Endpoint	3.650	+20	2592 999 972	-17.6	-0.000 001	-0.007

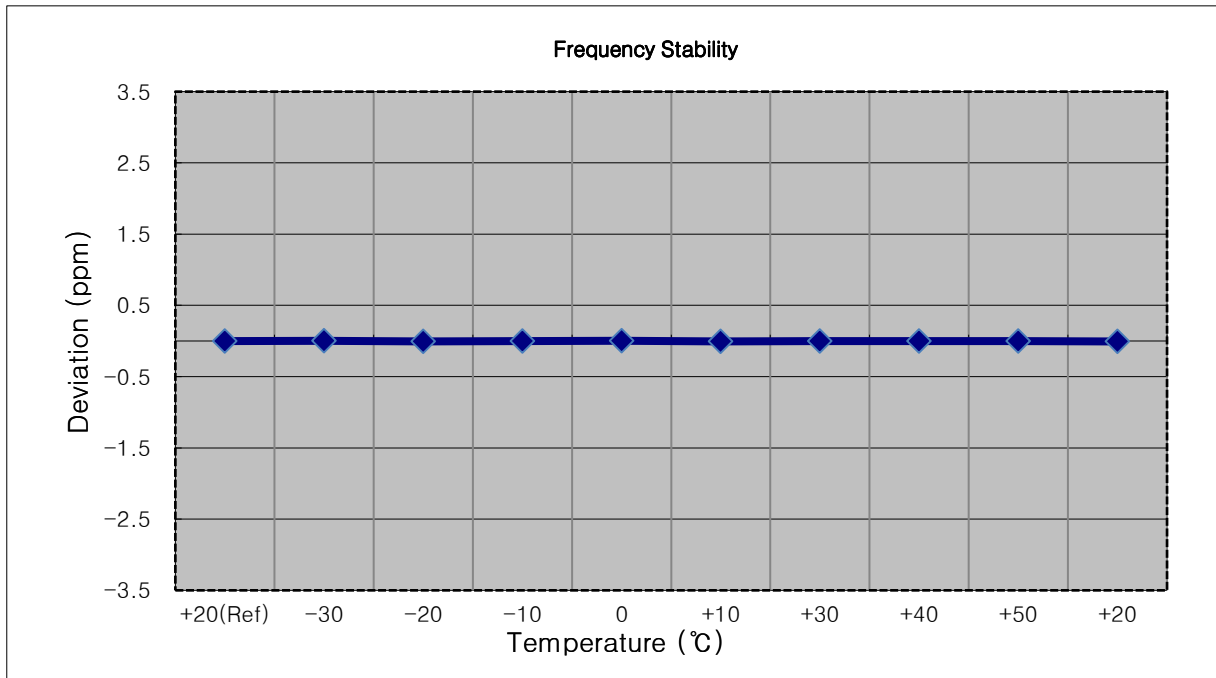


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2592 999 995	0.0	0.000 000	0.000
100 %		-30	2592 999 988	-6.9	0.000 000	-0.003
100 %		-20	2592 999 988	-7.2	0.000 000	-0.003
100 %		-10	2592 999 986	-8.6	0.000 000	-0.003
100 %		0	2592 999 986	-9.5	0.000 000	-0.004
100 %		+10	2592 999 986	-9.4	0.000 000	-0.004
100 %		+30	2592 999 984	-10.8	0.000 000	-0.004
100 %		+40	2592 999 981	-14.0	-0.000 001	-0.005
100 %		+50	2592 999 980	-14.6	-0.000 001	-0.006
Batt. Endpoint	3.650	+20	2592 999 981	-13.9	-0.000 001	-0.005

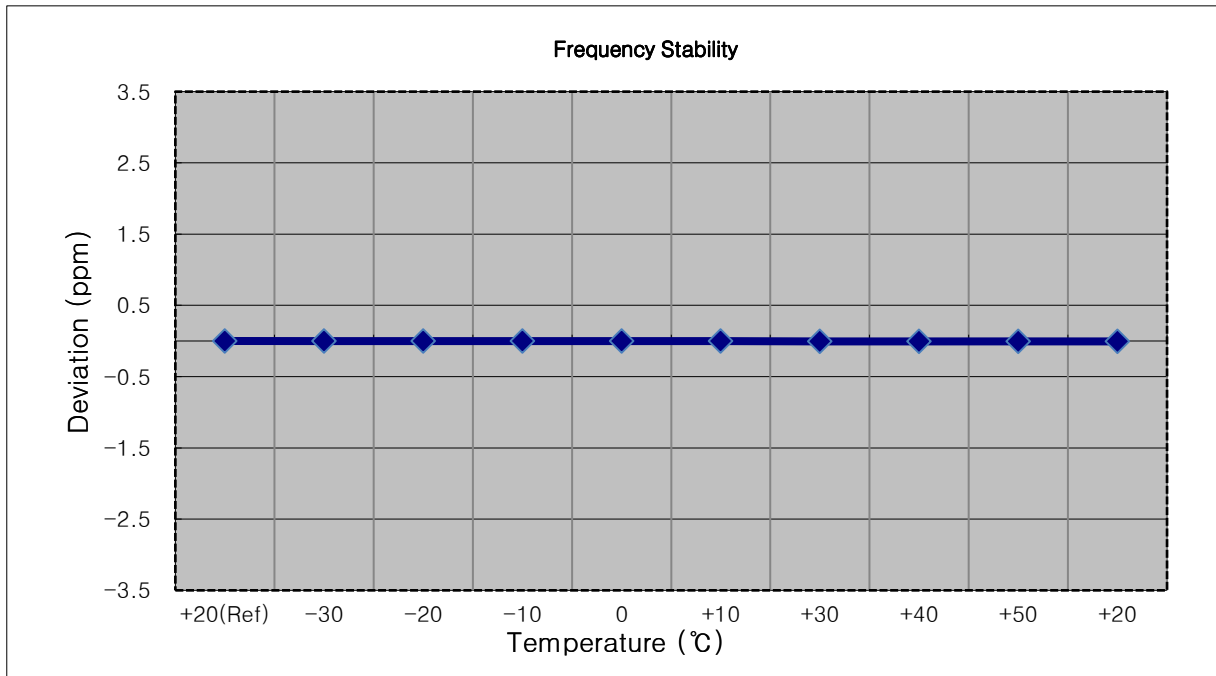


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2592 999 989	0.0	0.000 000	0.000
100 %		-30	2592 999 979	-9.9	0.000 000	-0.004
100 %		-20	2592 999 978	-11.1	0.000 000	-0.004
100 %		-10	2592 999 976	-12.8	0.000 000	-0.005
100 %		0	2592 999 975	-14.5	-0.000 001	-0.006
100 %		+10	2592 999 992	2.8	0.000 000	0.001
100 %		+30	2592 999 999	10.1	0.000 000	0.004
100 %		+40	2592 999 982	-6.8	0.000 000	-0.003
100 %		+50	2592 999 984	-5.0	0.000 000	-0.002
Batt. Endpoint	3.650	+20	2592 999 985	-4.3	0.000 000	-0.002

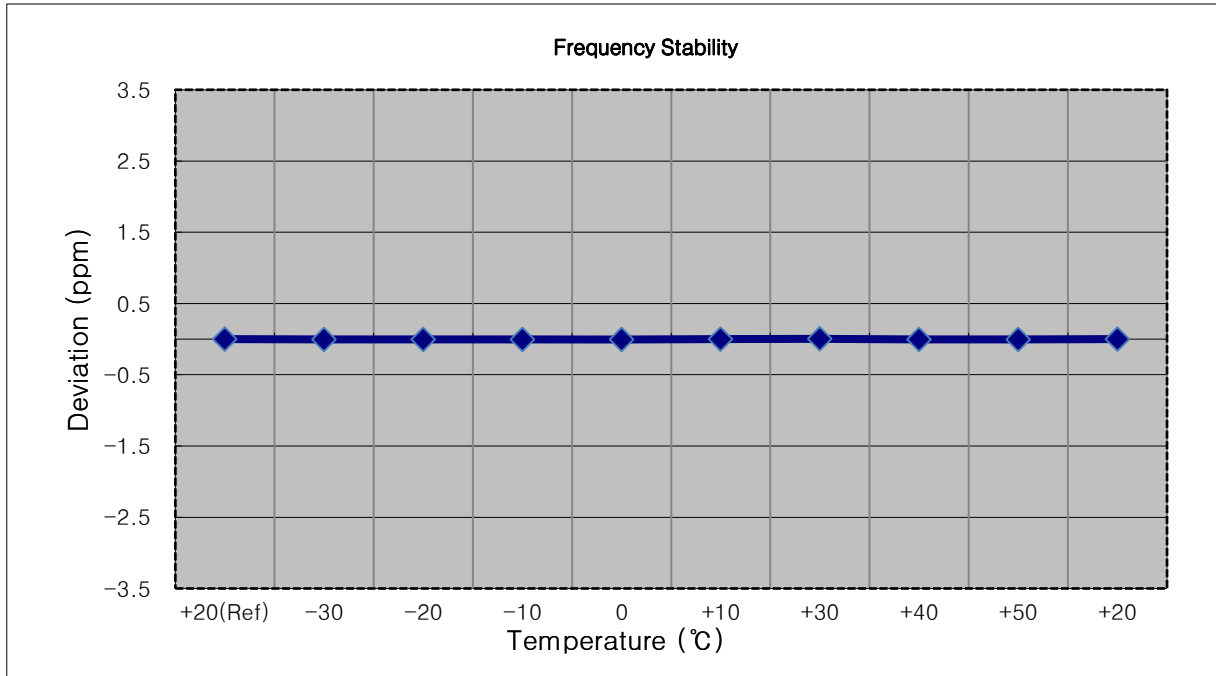


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2687,500,000 Hz
- ▣ BANDWIDTH: 41565 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2687 499 985	0.0	0.000 000	0.000
100 %		-30	2687 499 966	-19.3	-0.000 001	-0.007
100 %		-20	2687 499 967	-17.7	-0.000 001	-0.007
100 %		-10	2687 499 958	-26.9	-0.000 001	-0.010
100 %		0	2687 499 967	-18.1	-0.000 001	-0.007
100 %		+10	2687 499 956	-29.5	-0.000 001	-0.011
100 %		+30	2687 499 969	-15.7	-0.000 001	-0.006
100 %		+40	2687 499 971	-14.4	-0.000 001	-0.005
100 %		+50	2687 499 966	-19.0	-0.000 001	-0.007
Batt. Endpoint		3.650	+20	2687 499 978	-7.5	0.000 000

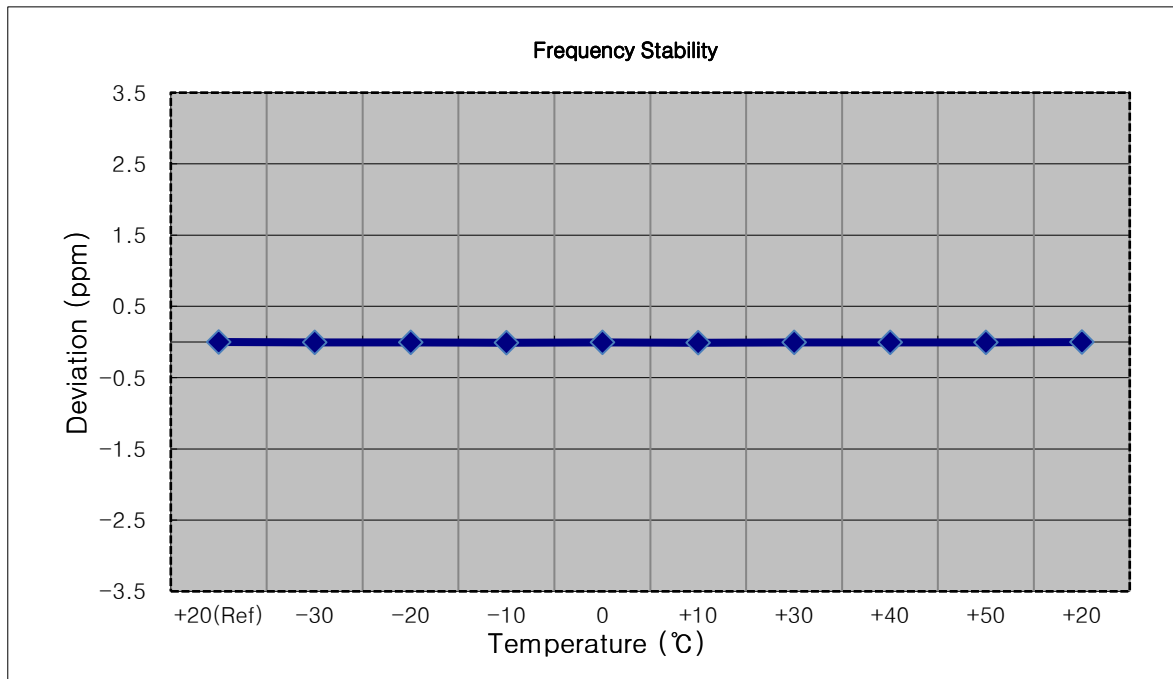


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2685,000,000 Hz
- ▣ BANDWIDTH: 41540 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2685 000 006	0.0	0.000 000	0.000
100 %		-30	2684 999 996	-9.9	0.000 000	-0.004
100 %		-20	2685 000 001	-4.8	0.000 000	-0.002
100 %		-10	2685 000 011	4.5	0.000 000	0.002
100 %		0	2685 000 004	-1.9	0.000 000	-0.001
100 %		+10	2685 000 008	2.0	0.000 000	0.001
100 %		+30	2685 000 002	-4.3	0.000 000	-0.002
100 %		+40	2685 000 001	-5.2	0.000 000	-0.002
100 %		+50	2685 000 001	-5.6	0.000 000	-0.002
Batt. Endpoint	3.650	+20	2684 999 999	-7.2	0.000 000	-0.003

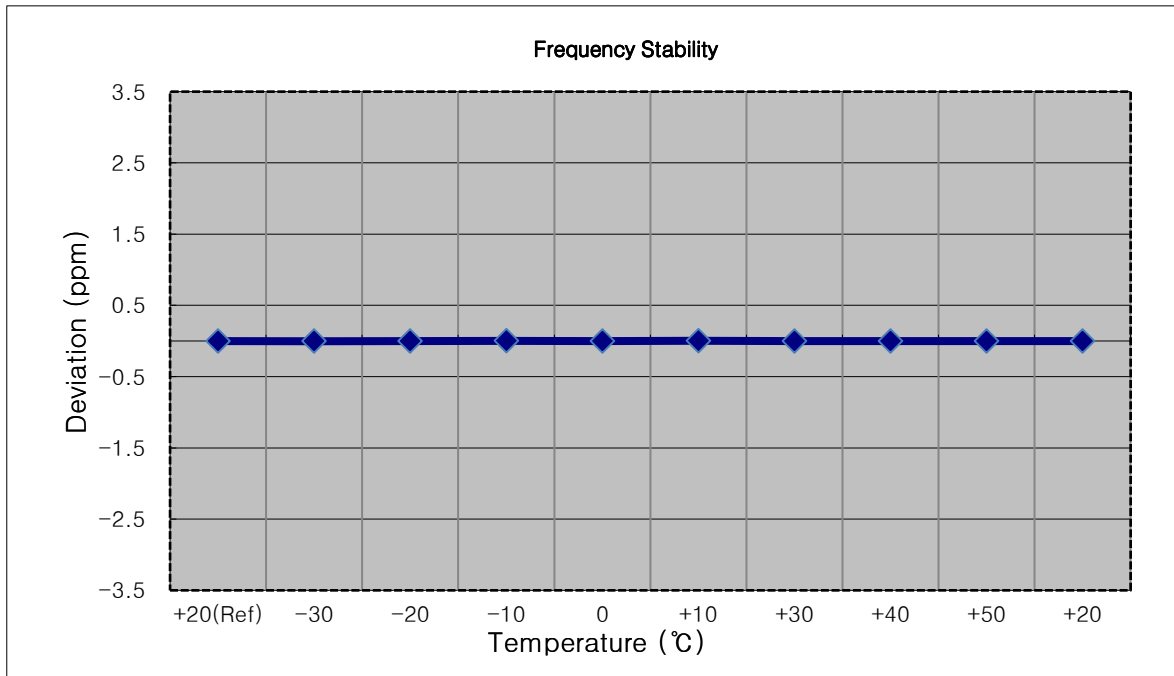


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2682,500,000 Hz
- ▣ BANDWIDTH: 41515 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2682 499 992	0.0	0.000 000	0.000
100 %		-30	2682 500 001	8.7	0.000 000	0.003
100 %		-20	2682 499 987	-5.1	0.000 000	-0.002
100 %		-10	2682 499 978	-14.4	-0.000 001	-0.005
100 %		0	2682 500 000	7.8	0.000 000	0.003
100 %		+10	2682 499 985	-7.6	0.000 000	-0.003
100 %		+30	2682 499 977	-15.0	-0.000 001	-0.006
100 %		+40	2682 499 990	-2.9	0.000 000	-0.001
100 %		+50	2682 499 986	-6.5	0.000 000	-0.002
Batt. Endpoint		3.650	+20	2682 499 979	-13.6	-0.000 001

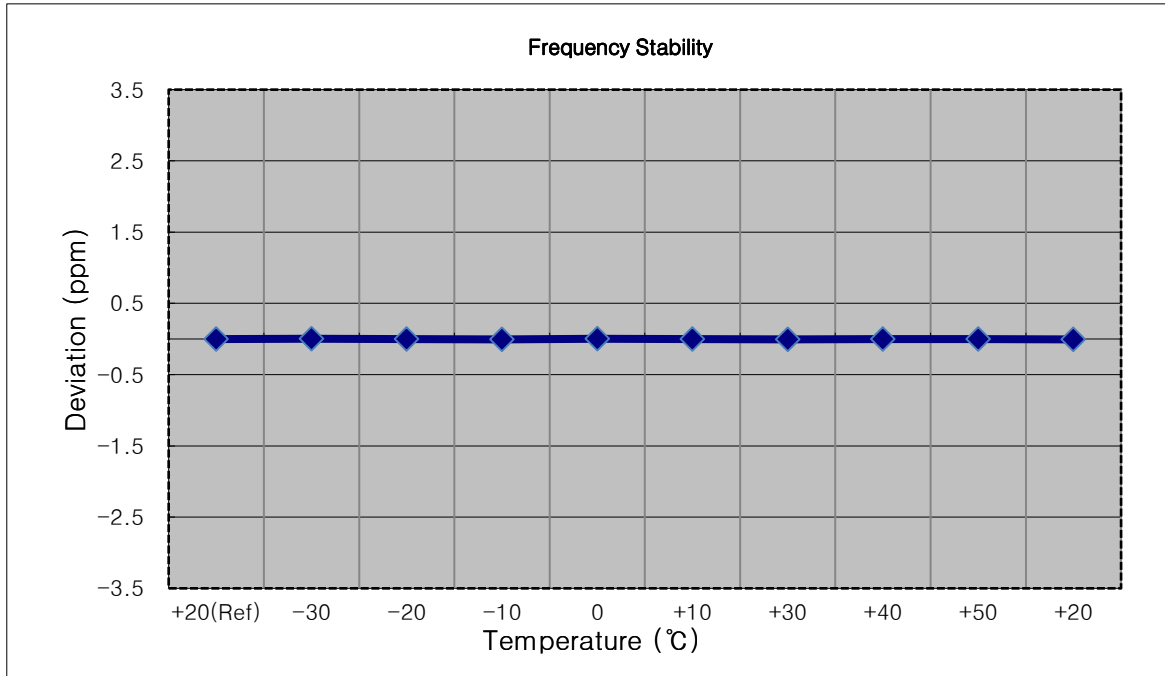

- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2680,000,000 Hz
- ▣ BANDWIDTH: 41490 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2680 000 004	0.0	0.000 000	0.000
100 %		-30	2679 999 989	-14.1	-0.000 001	-0.005
100 %		-20	2679 999 999	-4.7	0.000 000	-0.002
100 %		-10	2680 000 012	8.1	0.000 000	0.003
100 %		0	2679 999 995	-8.2	0.000 000	-0.003
100 %		+10	2680 000 010	6.6	0.000 000	0.002
100 %		+30	2679 999 998	-5.1	0.000 000	-0.002
100 %		+40	2679 999 992	-11.1	0.000 000	-0.004
100 %		+50	2680 000 010	6.4	0.000 000	0.002
Batt. Endpoint	3.650	+20	2679 999 992	-11.6	0.000 000	-0.004

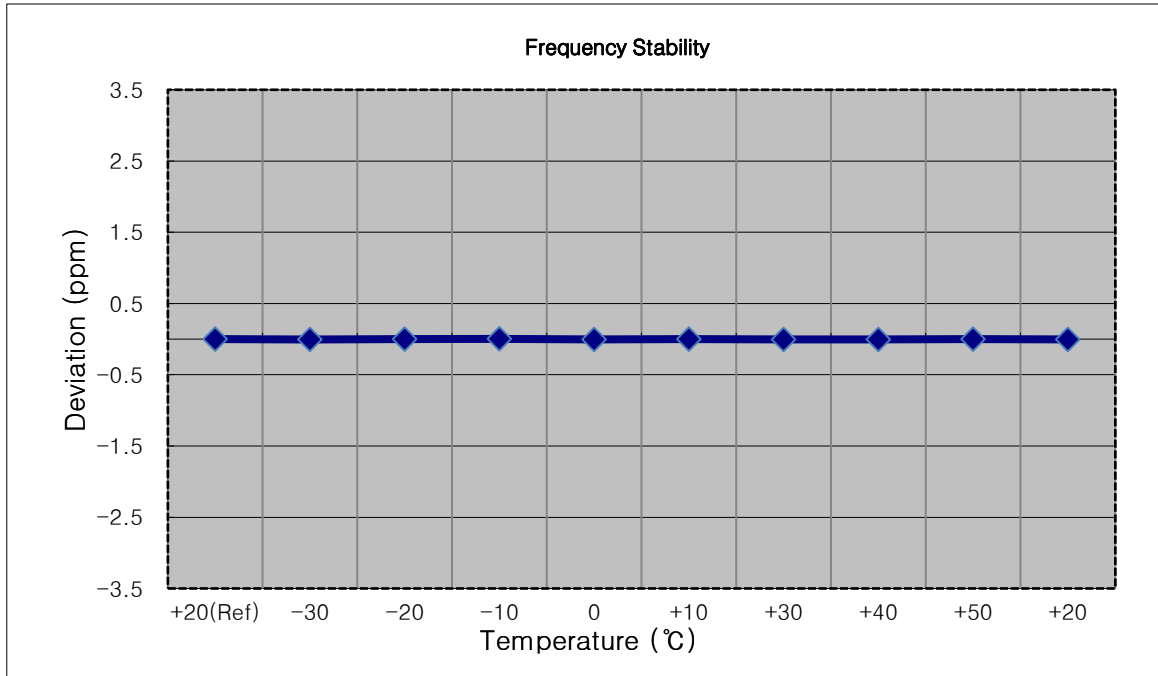


9. TEST PLOTS


Occupied Bandwidth Plot (5 MHz Ch.40620 QPSK RB 25) (POWER CLASS 3)




Occupied Bandwidth Plot (5 MHz Ch.40620 16-QAM RB 25) (POWER CLASS 3)

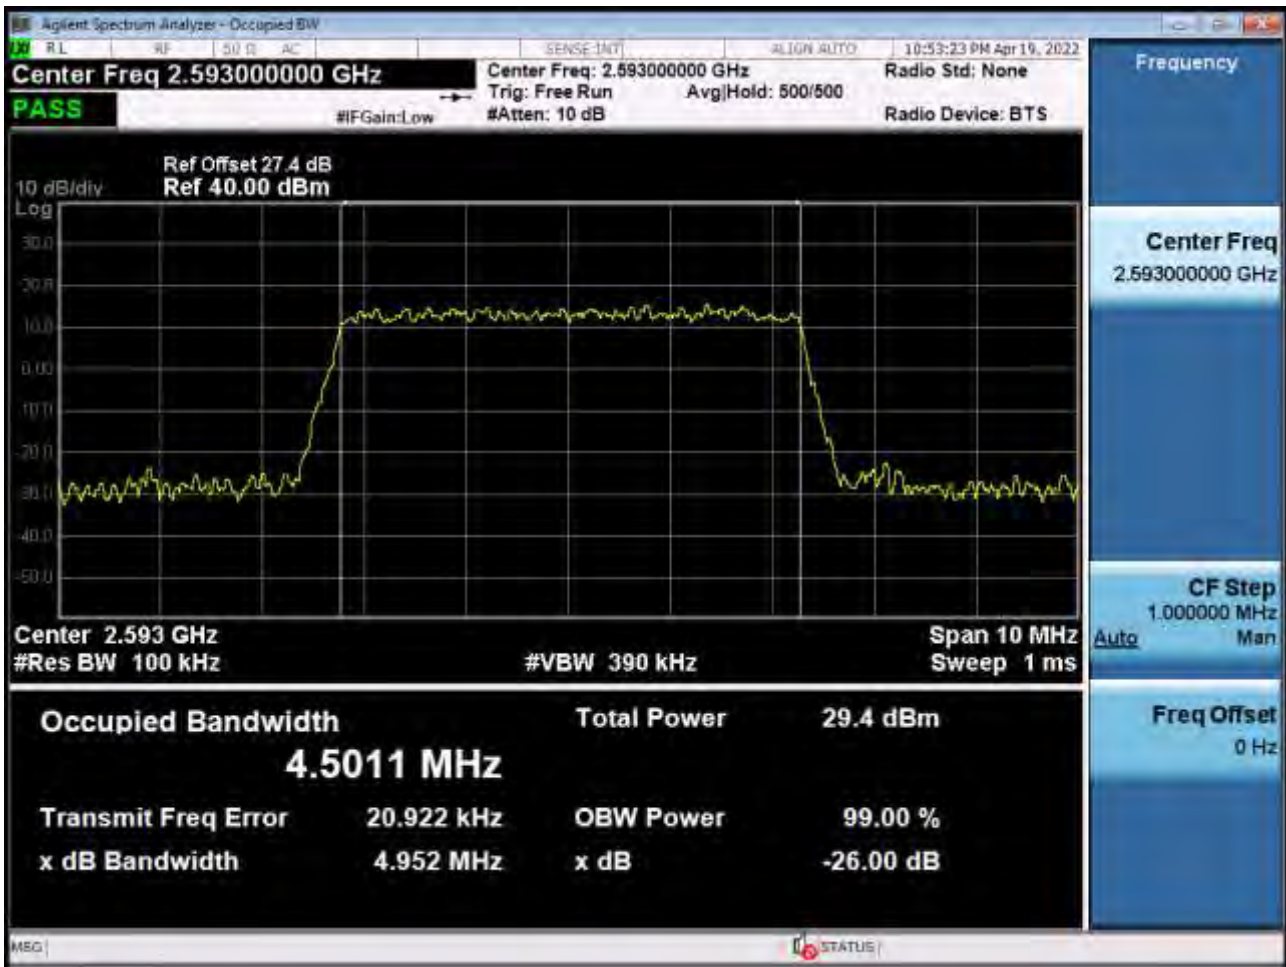


Occupied Bandwidth Plot (5 MHz Ch.40620 64-QAM RB 25) (POWER CLASS 3)

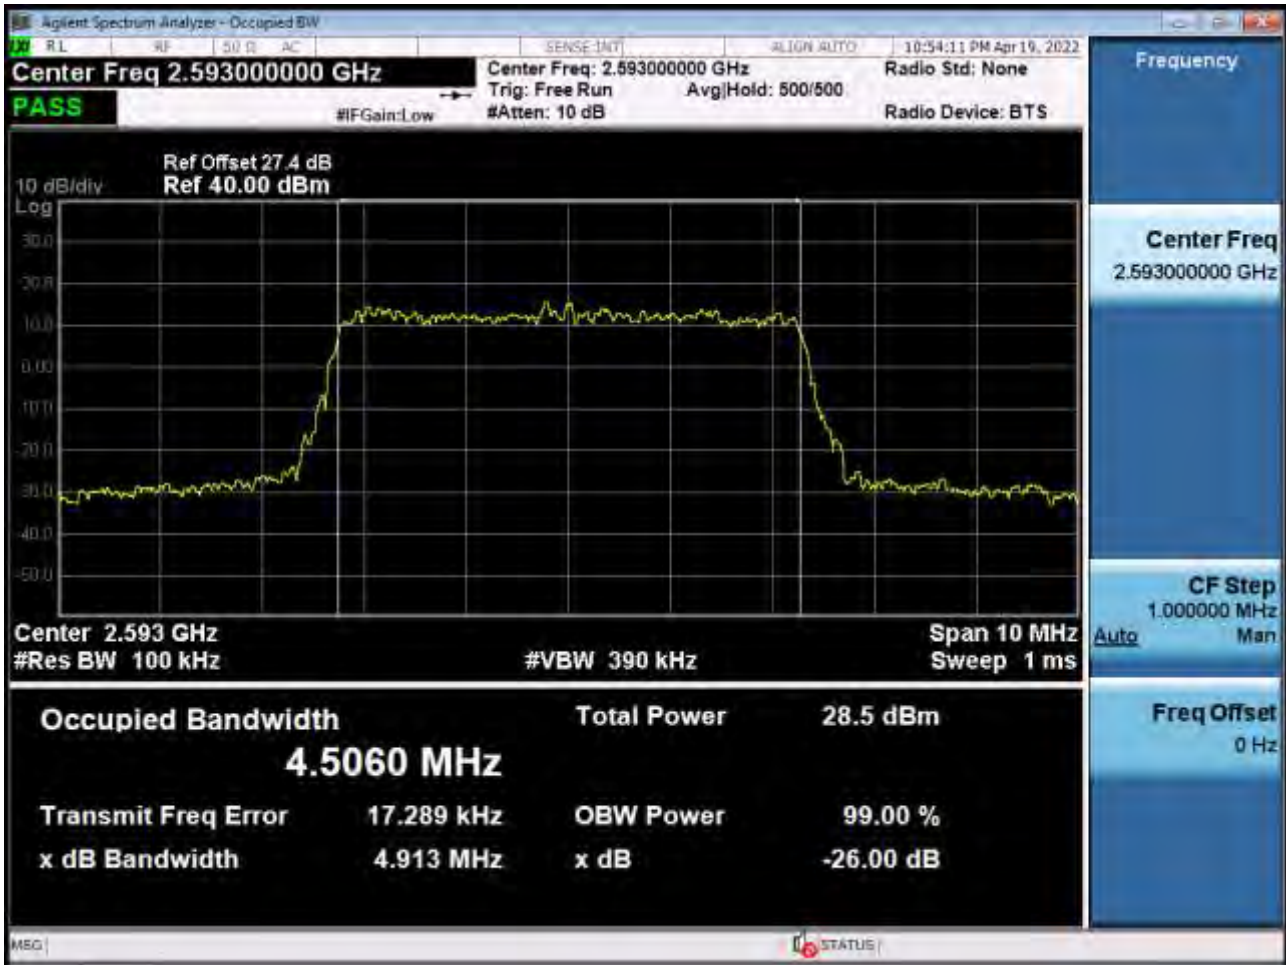


Occupied Bandwidth Plot (5 MHz Ch.40620 256-QAM RB 25) (POWER CLASS 3)

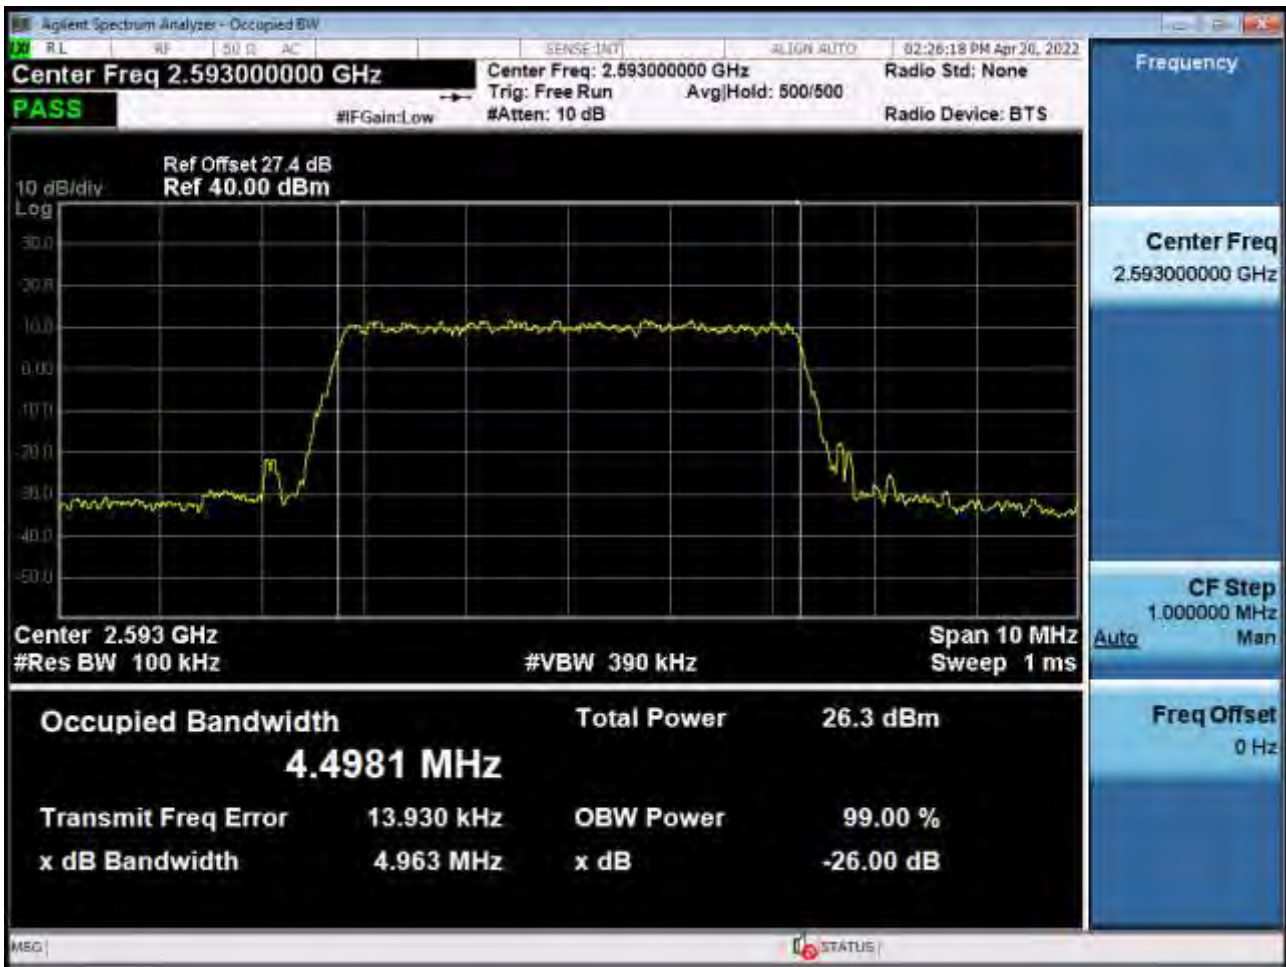


Occupied Bandwidth Plot (10 MHz Ch.40620 QPSK RB 50) (POWER CLASS 3)

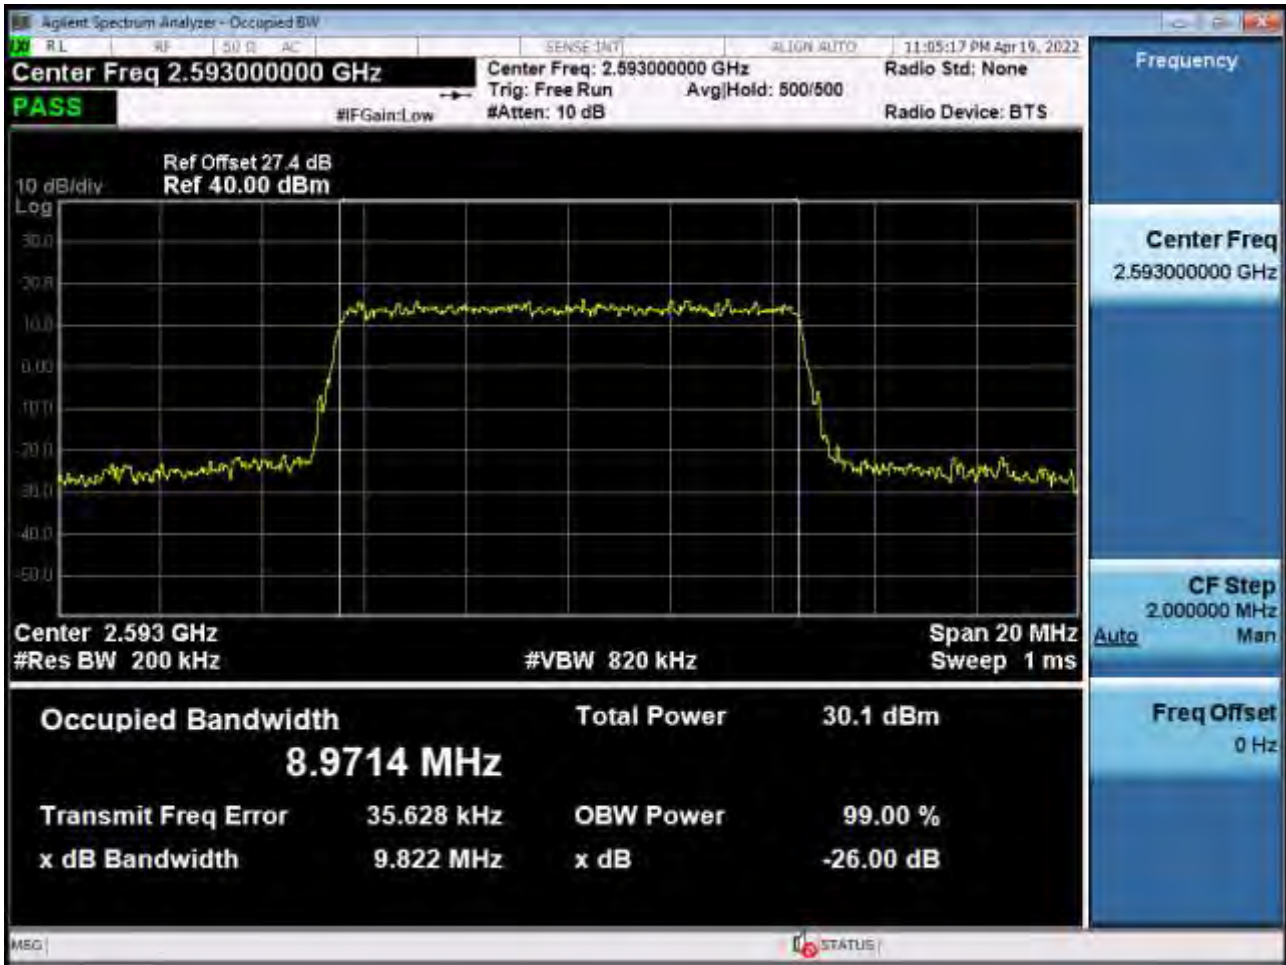


Occupied Bandwidth Plot (10 MHz Ch.40620 16-QAM RB 50) (POWER CLASS 3)

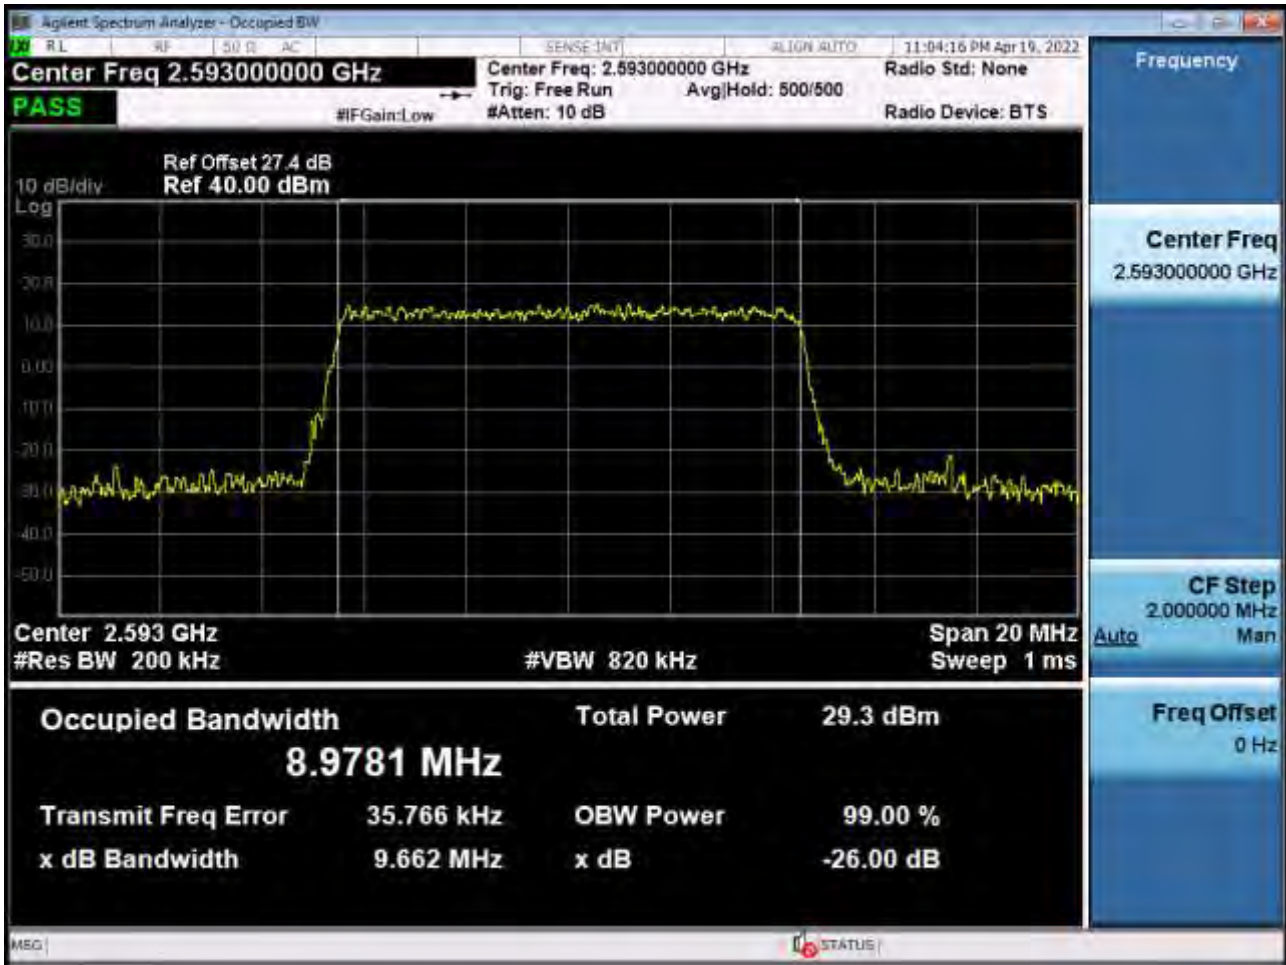


Occupied Bandwidth Plot (10 MHz Ch.40620 64-QAM RB 50) (POWER CLASS 3)

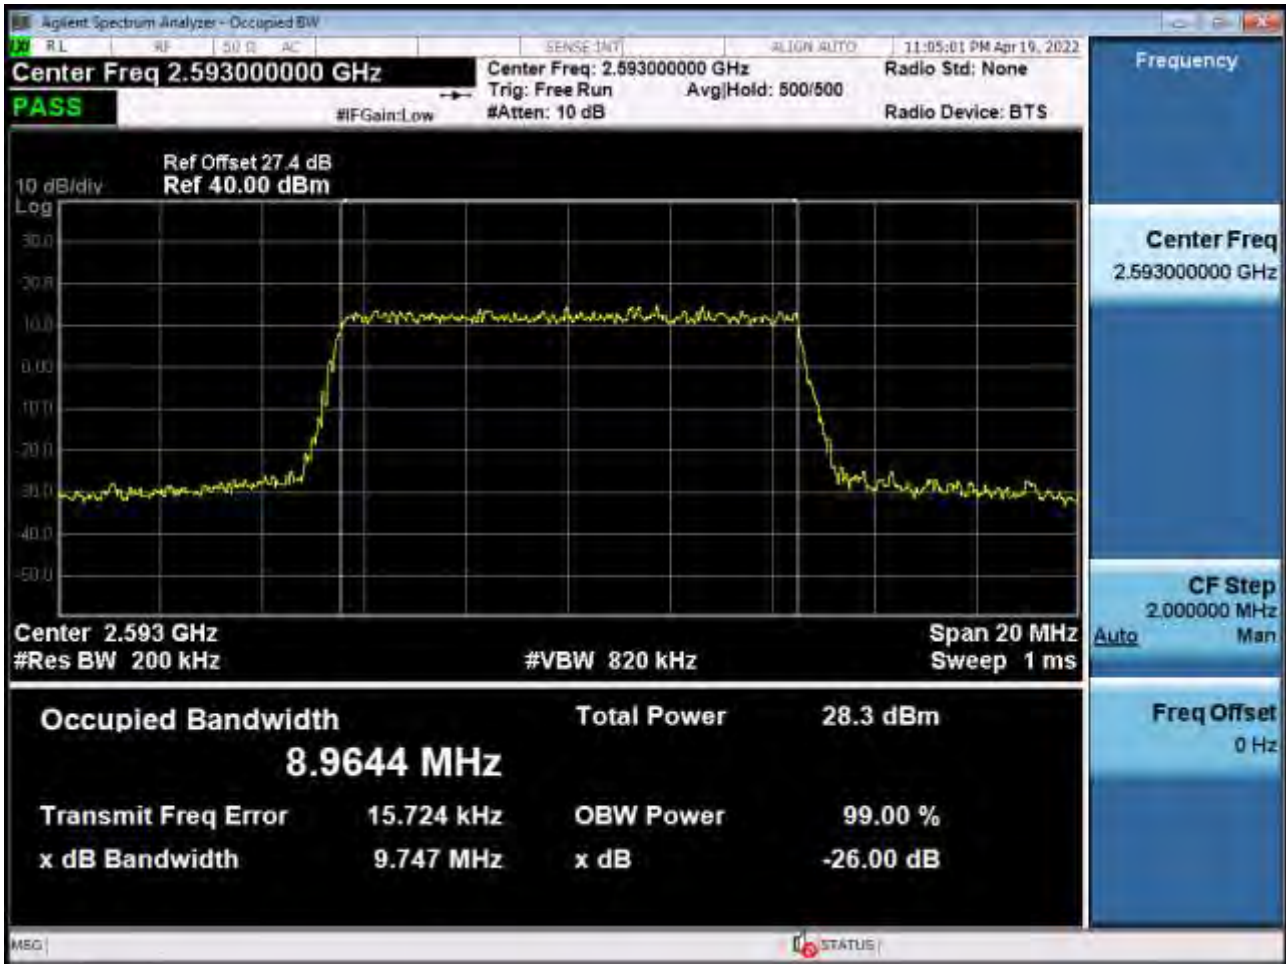


Occupied Bandwidth Plot (10 MHz Ch.40620 256-QAM RB 50) (POWER CLASS 3)

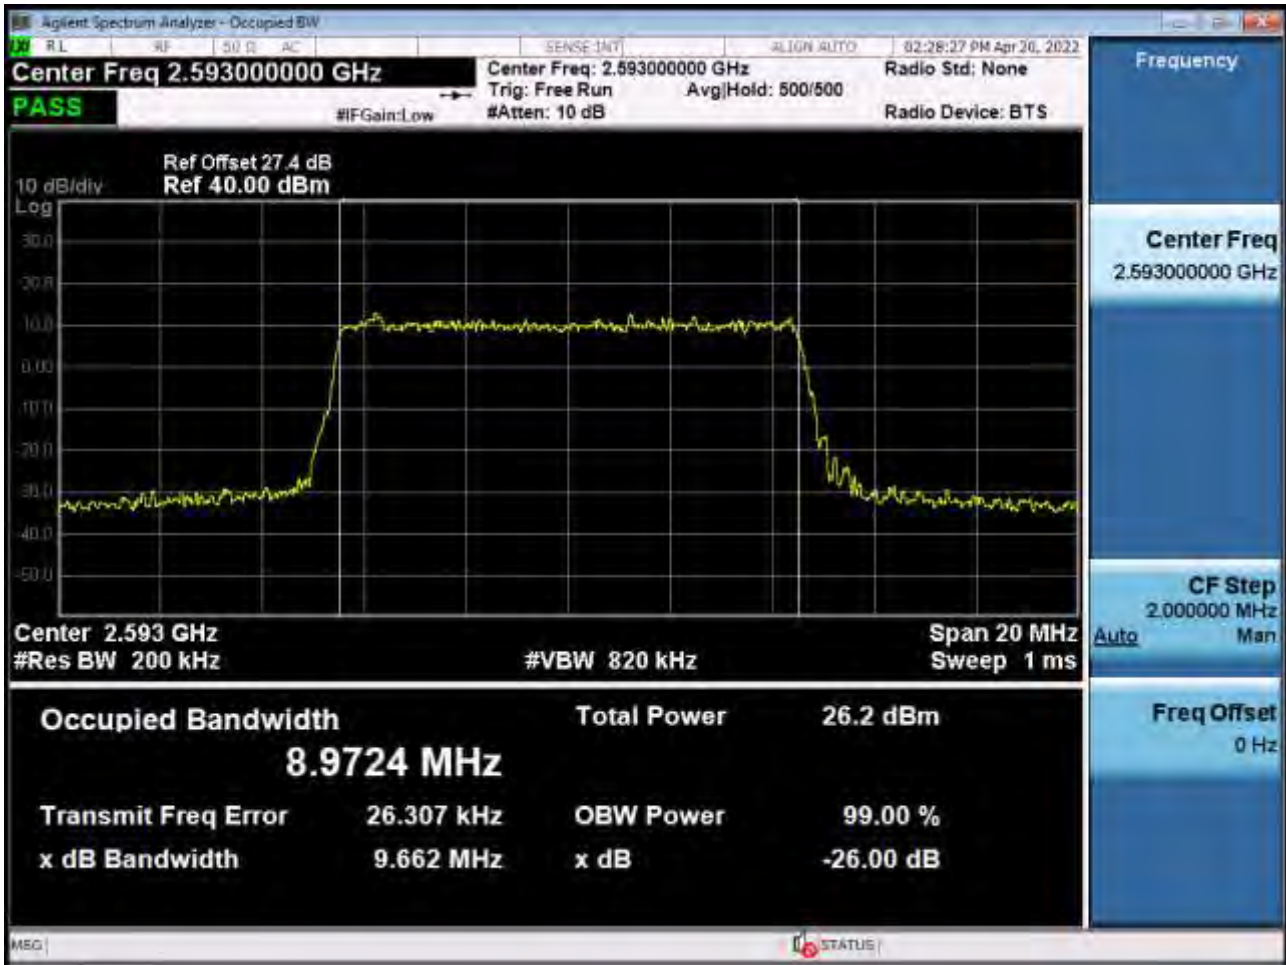


Occupied Bandwidth Plot (15 MHz Ch.40620 QPSK RB 75) (POWER CLASS 3)

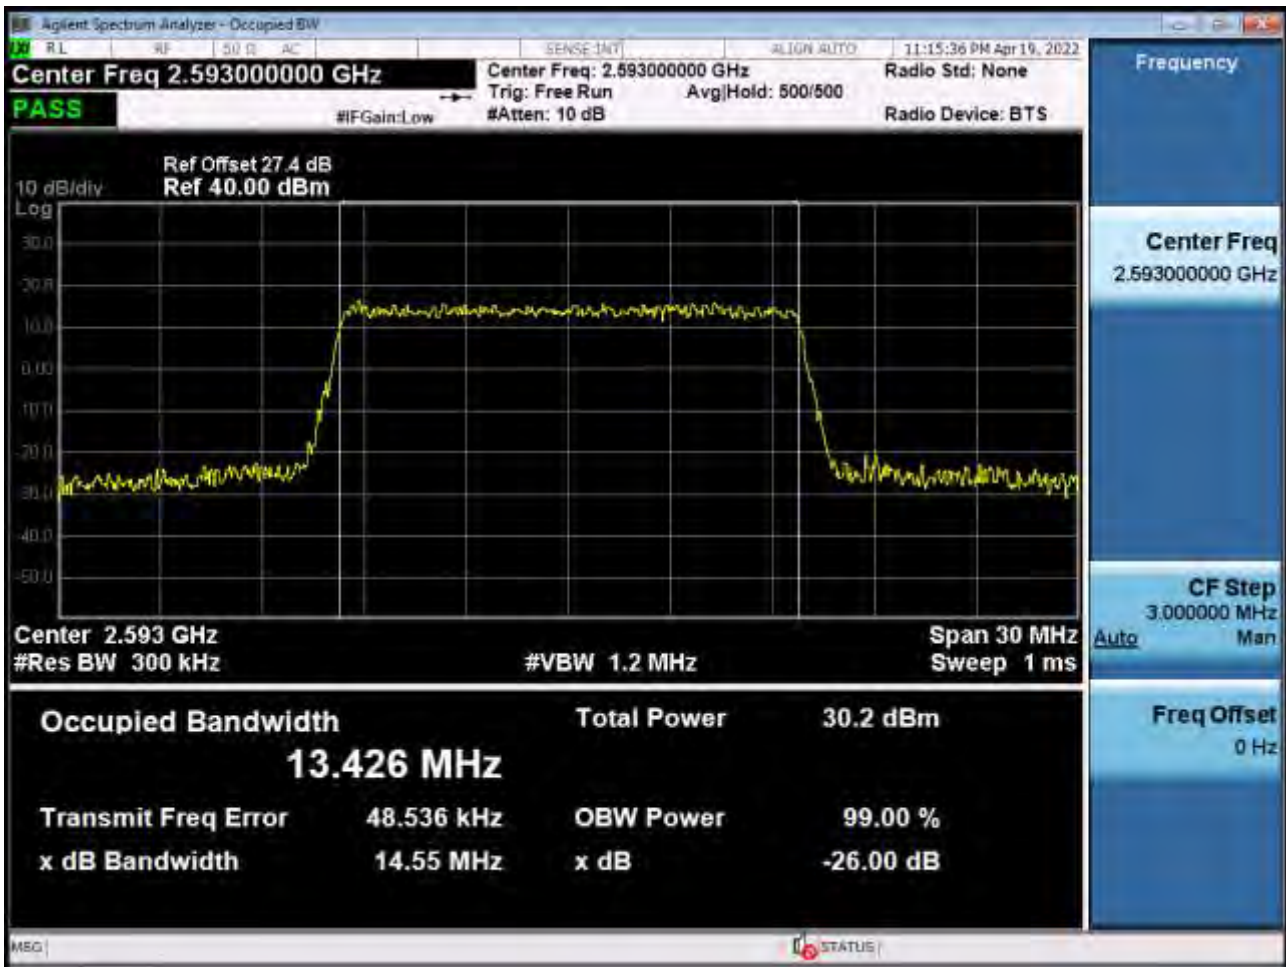


Occupied Bandwidth Plot (15 MHz Ch.40620 16-QAM RB 75) (POWER CLASS 3)

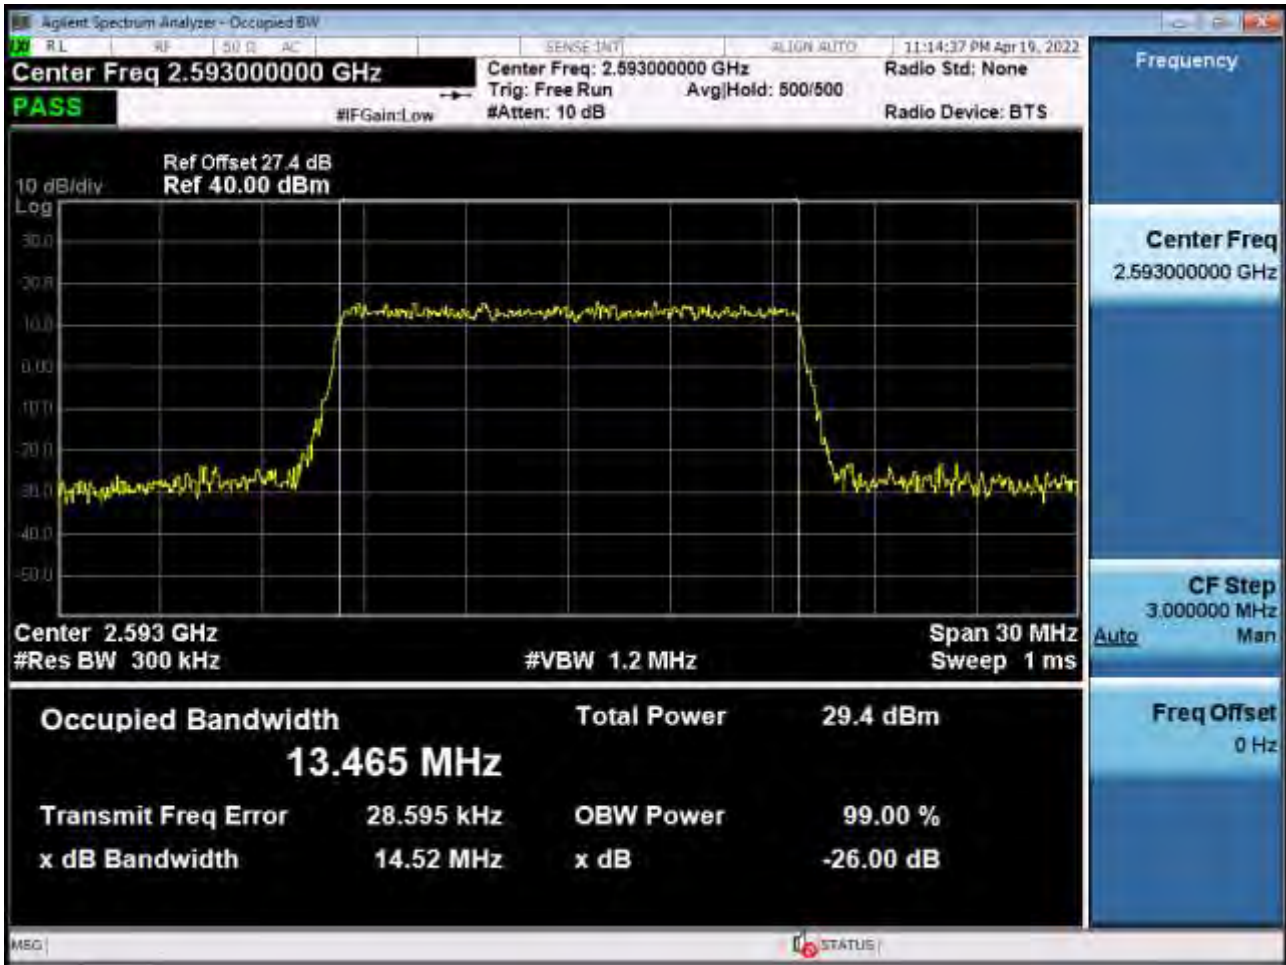


Occupied Bandwidth Plot (15 MHz Ch.40620 64-QAM RB 75) (POWER CLASS 3)

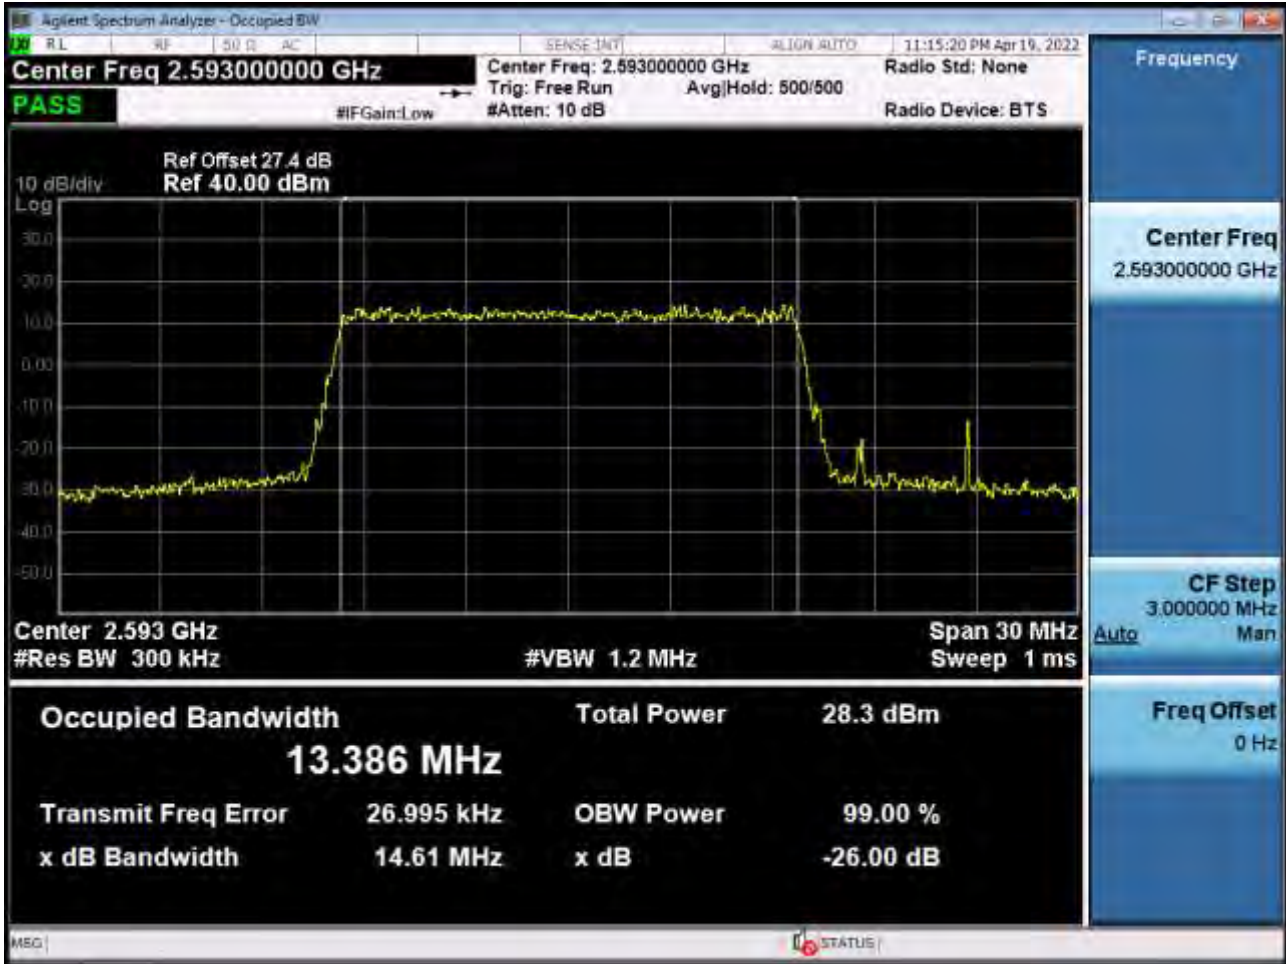


Occupied Bandwidth Plot (15 MHz Ch.40620 256-QAM RB 75) (POWER CLASS 3)

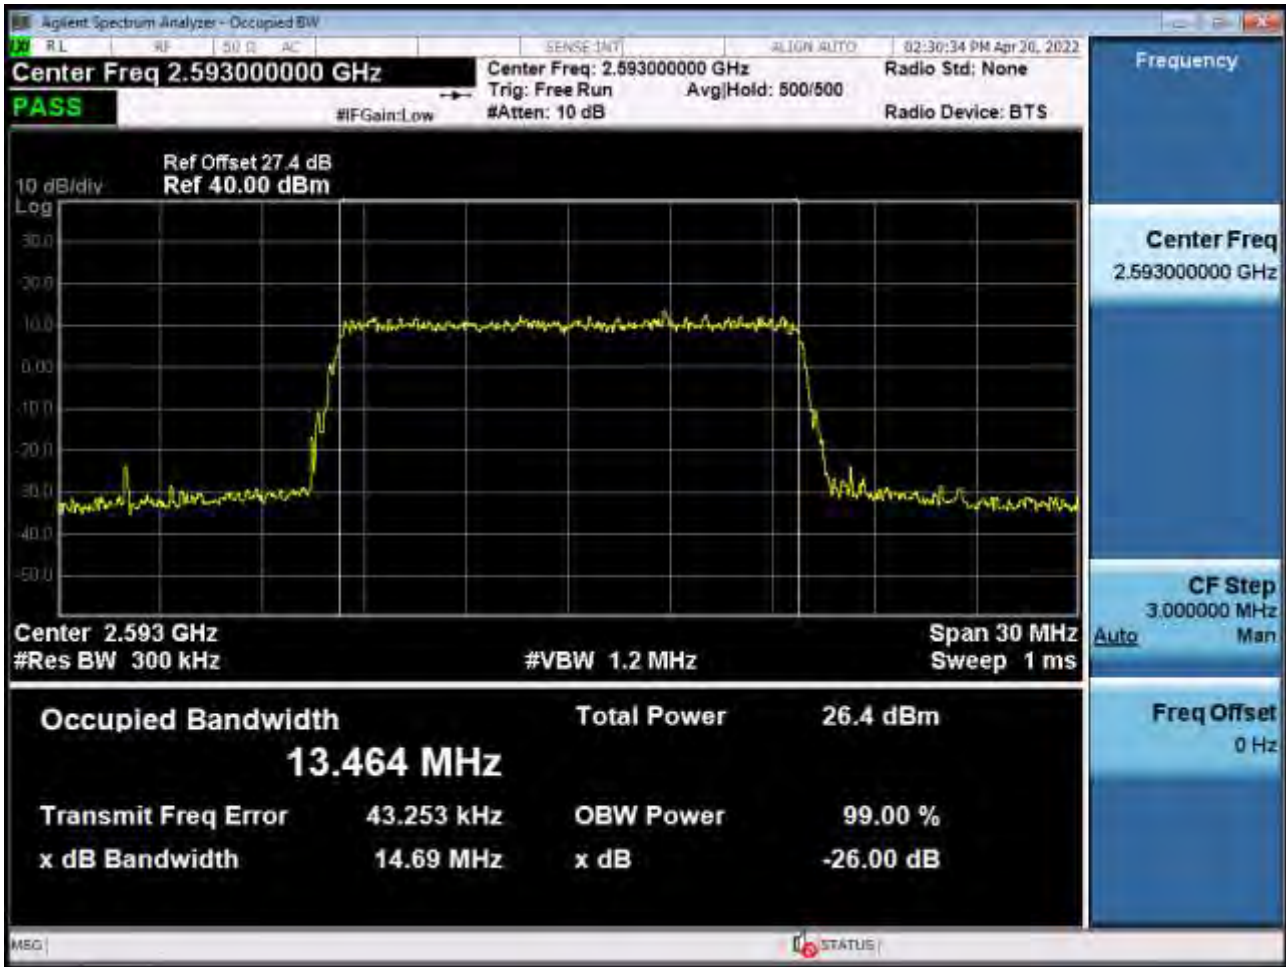


Occupied Bandwidth Plot (20 MHz Ch.40620 QPSK RB 100) (POWER CLASS 3)

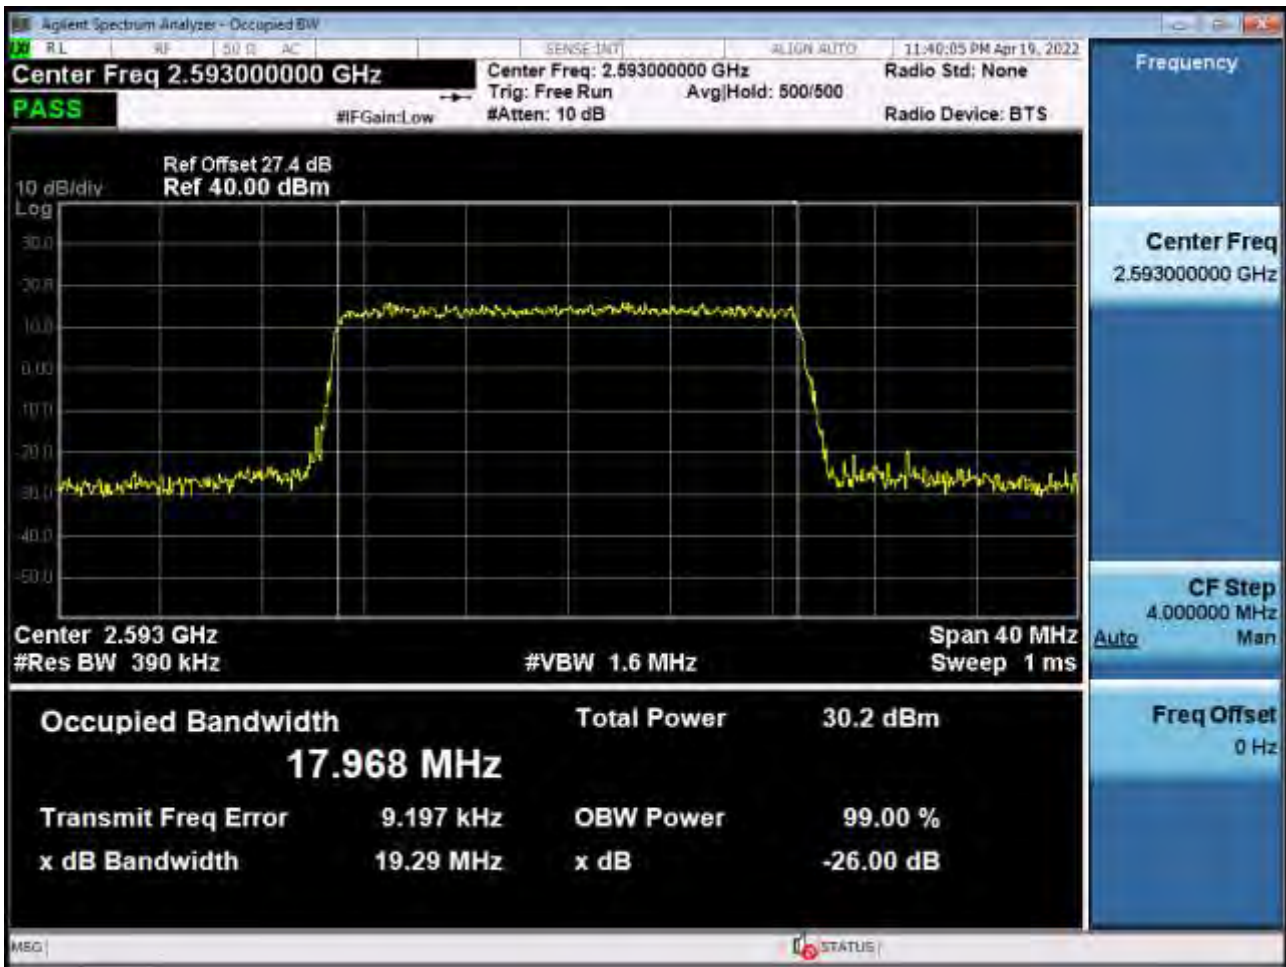


Occupied Bandwidth Plot (20 MHz Ch.40620 16-QAM RB 100) (POWER CLASS 3)

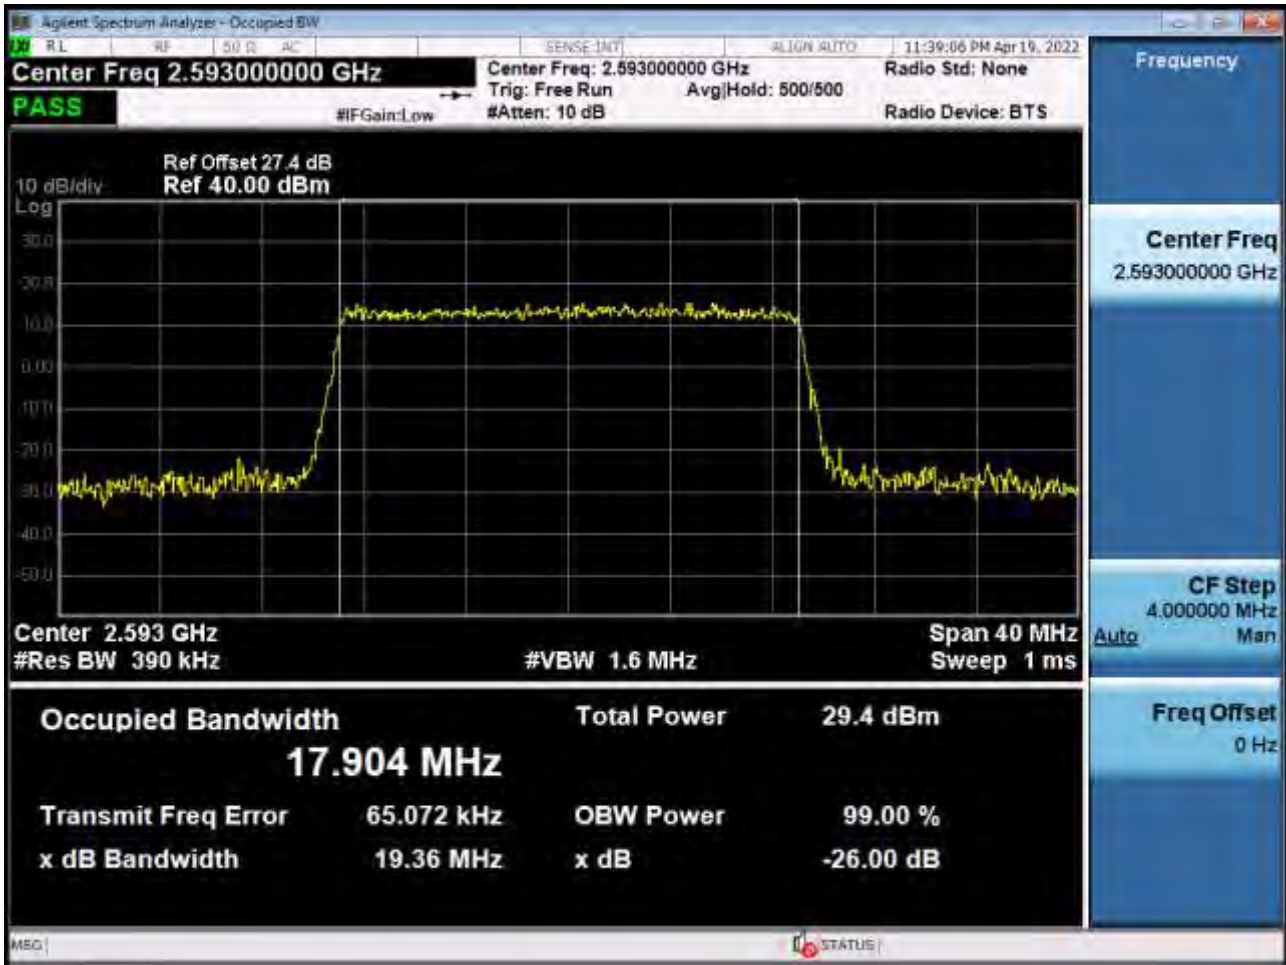


Occupied Bandwidth Plot (20 MHz Ch.40620 64-QAM RB 100) (POWER CLASS 3)

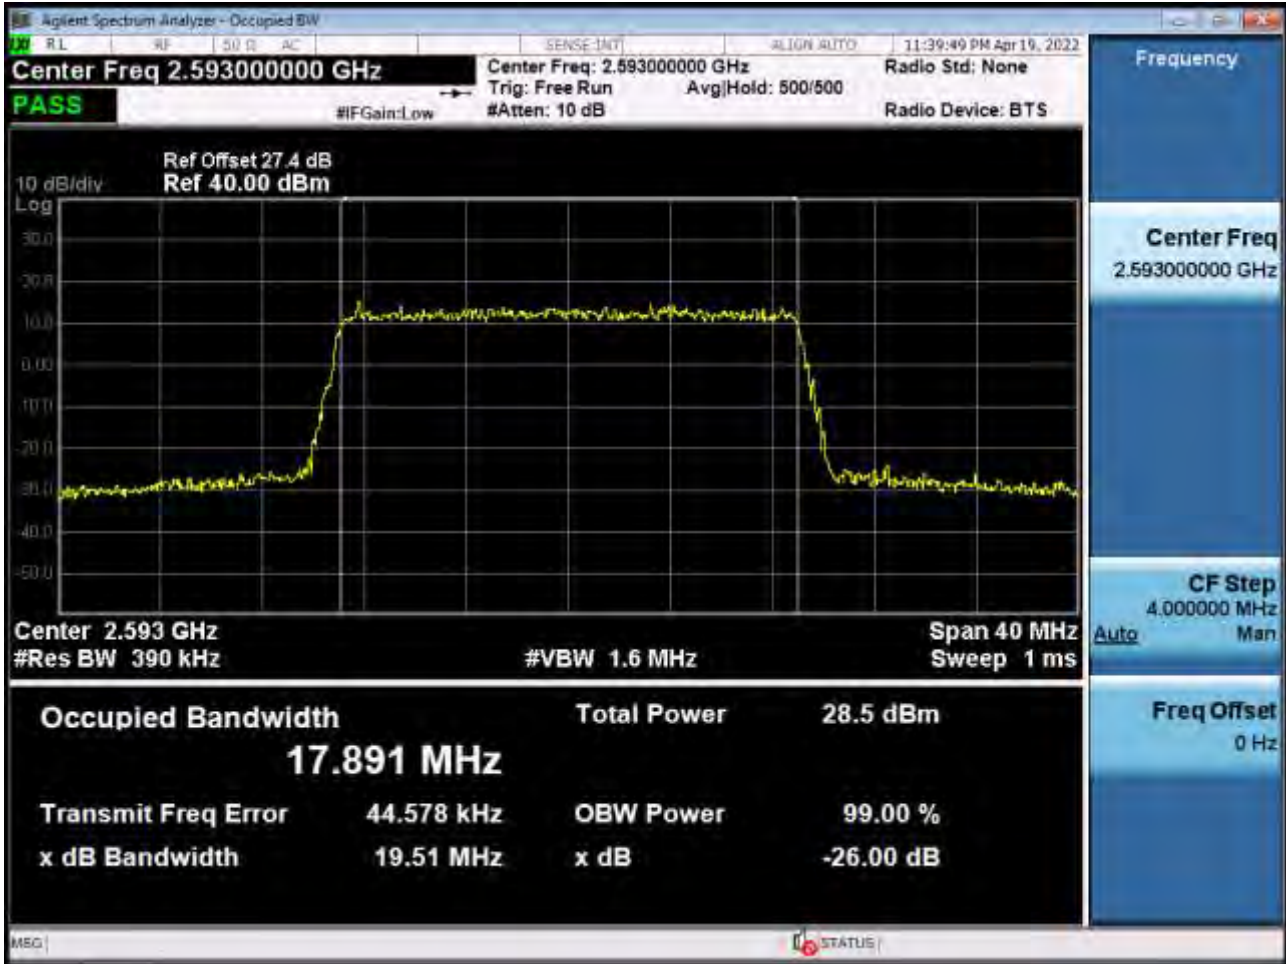


Occupied Bandwidth Plot (20 MHz Ch.40620 256-QAM RB 100) (POWER CLASS 3)

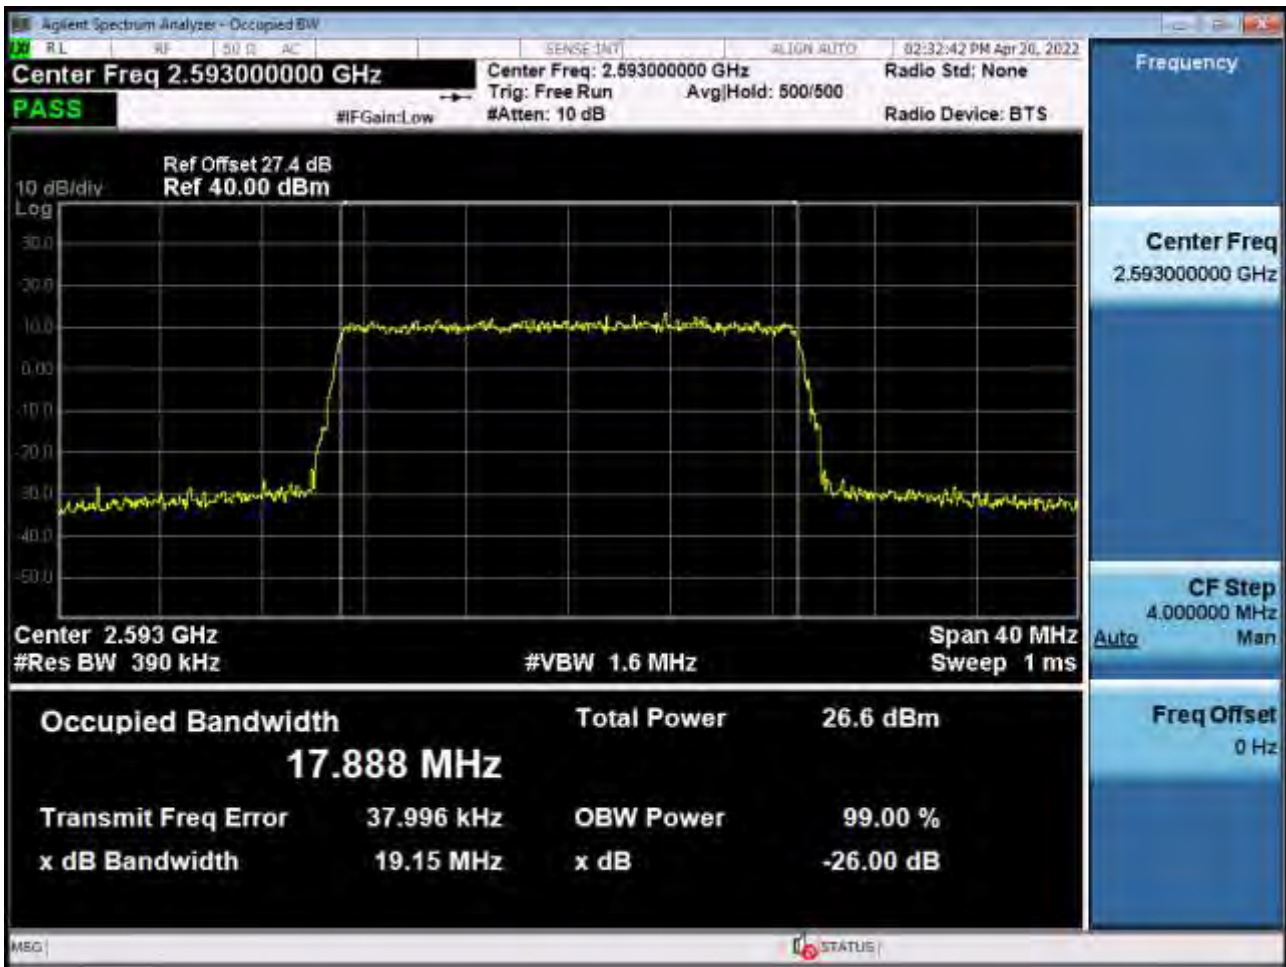


Occupied Bandwidth Plot (5 MHz Ch.40620 QPSK RB 25) (POWER CLASS 2)

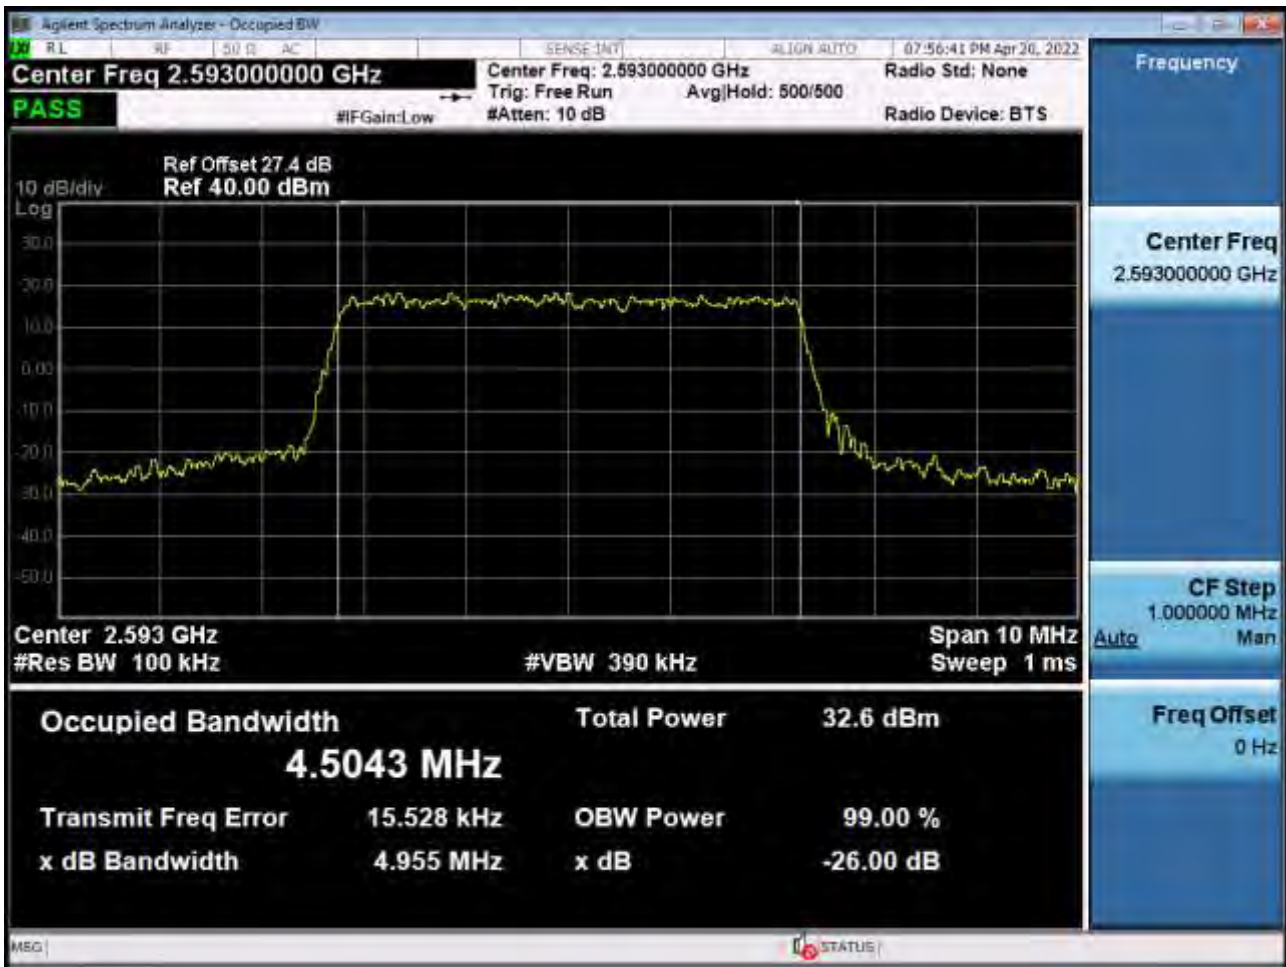


Occupied Bandwidth Plot (5 MHz Ch.40620 16-QAM RB 25) (POWER CLASS 2)

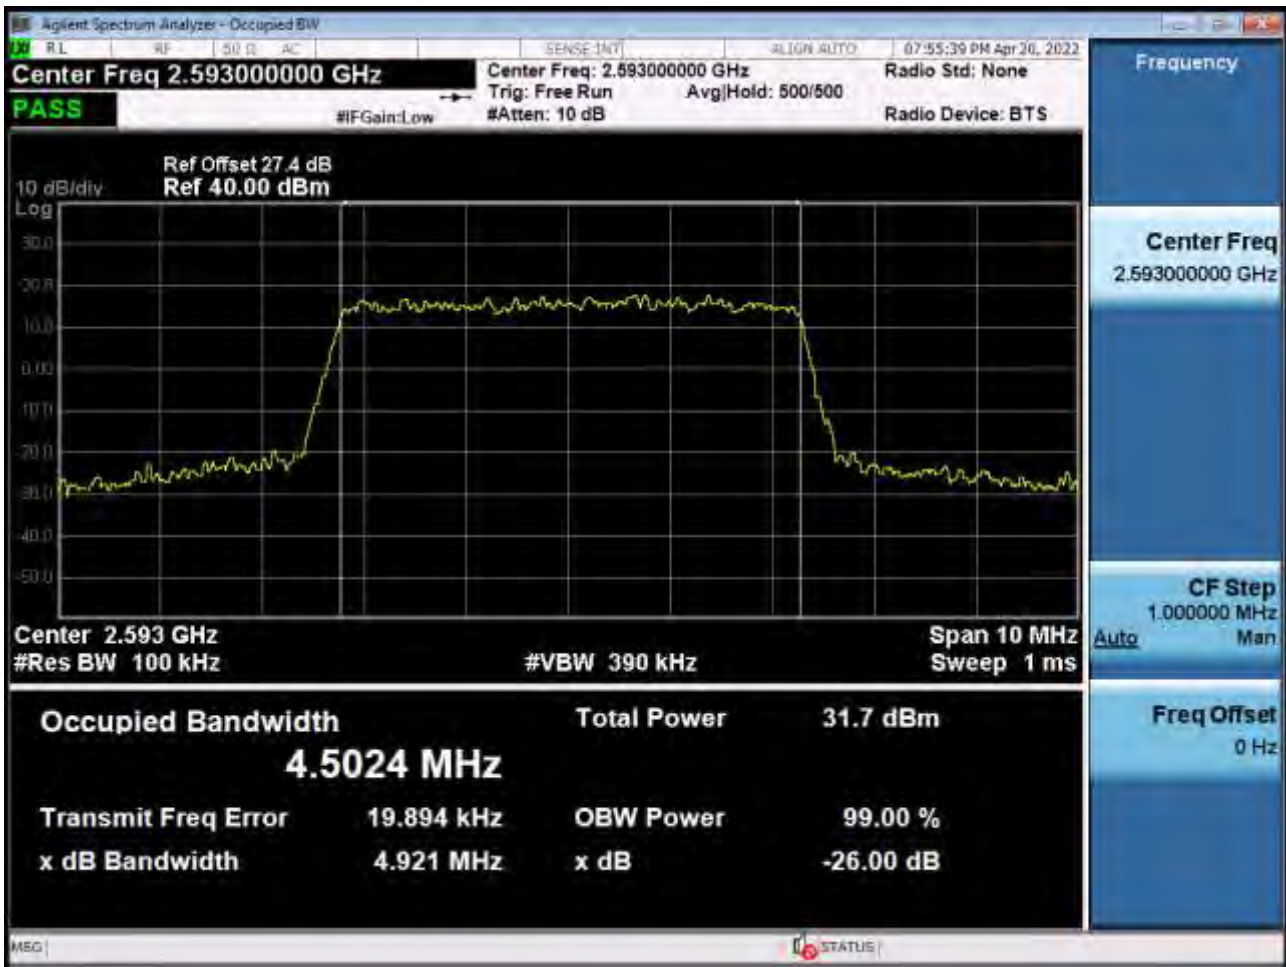


Occupied Bandwidth Plot (5 MHz Ch.40620 64-QAM RB 25) (POWER CLASS 2)

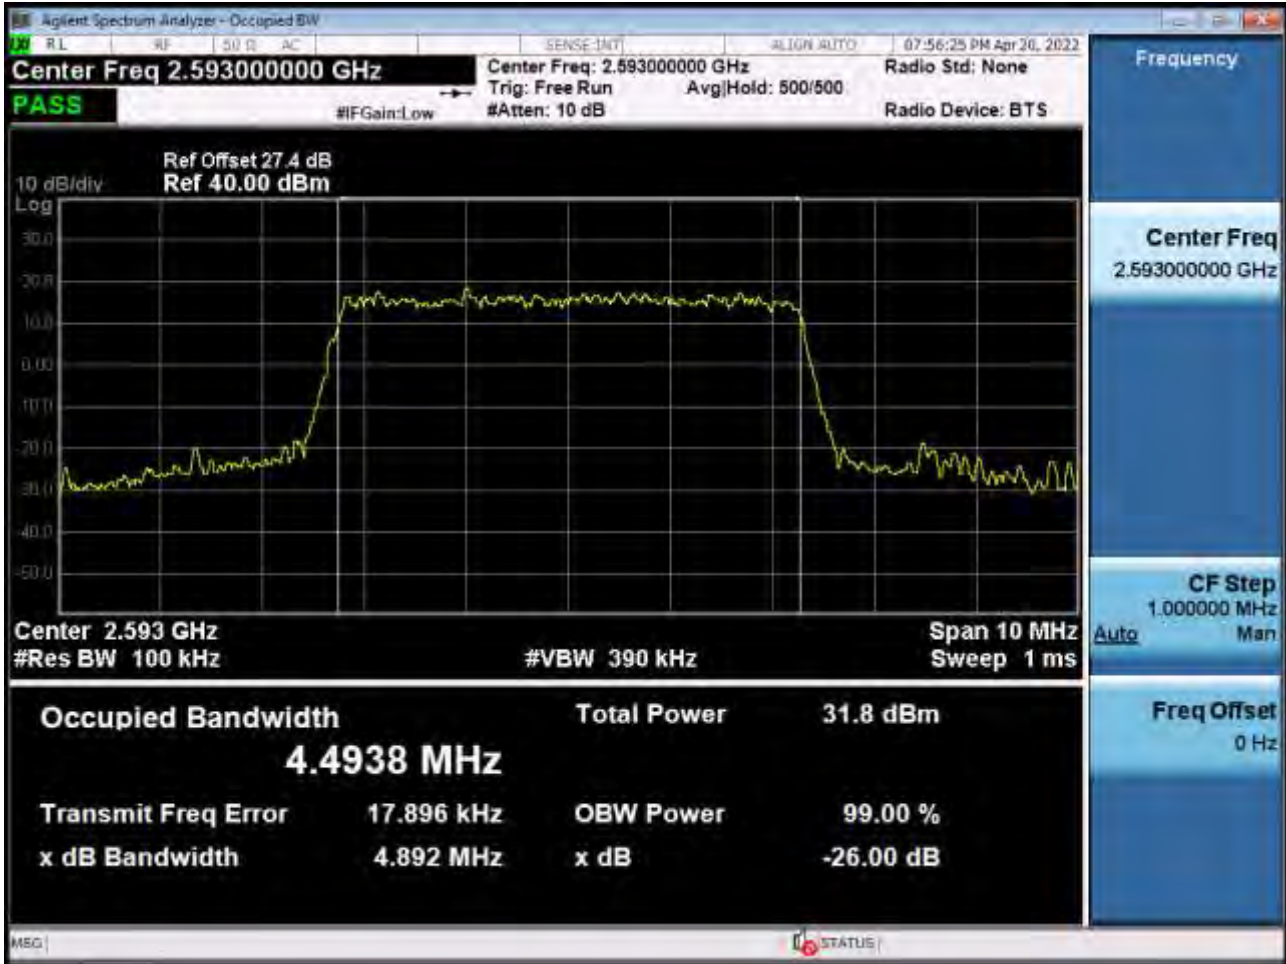

Occupied Bandwidth Plot (5 MHz Ch.40620 256-QAM RB 25) (POWER CLASS 2)

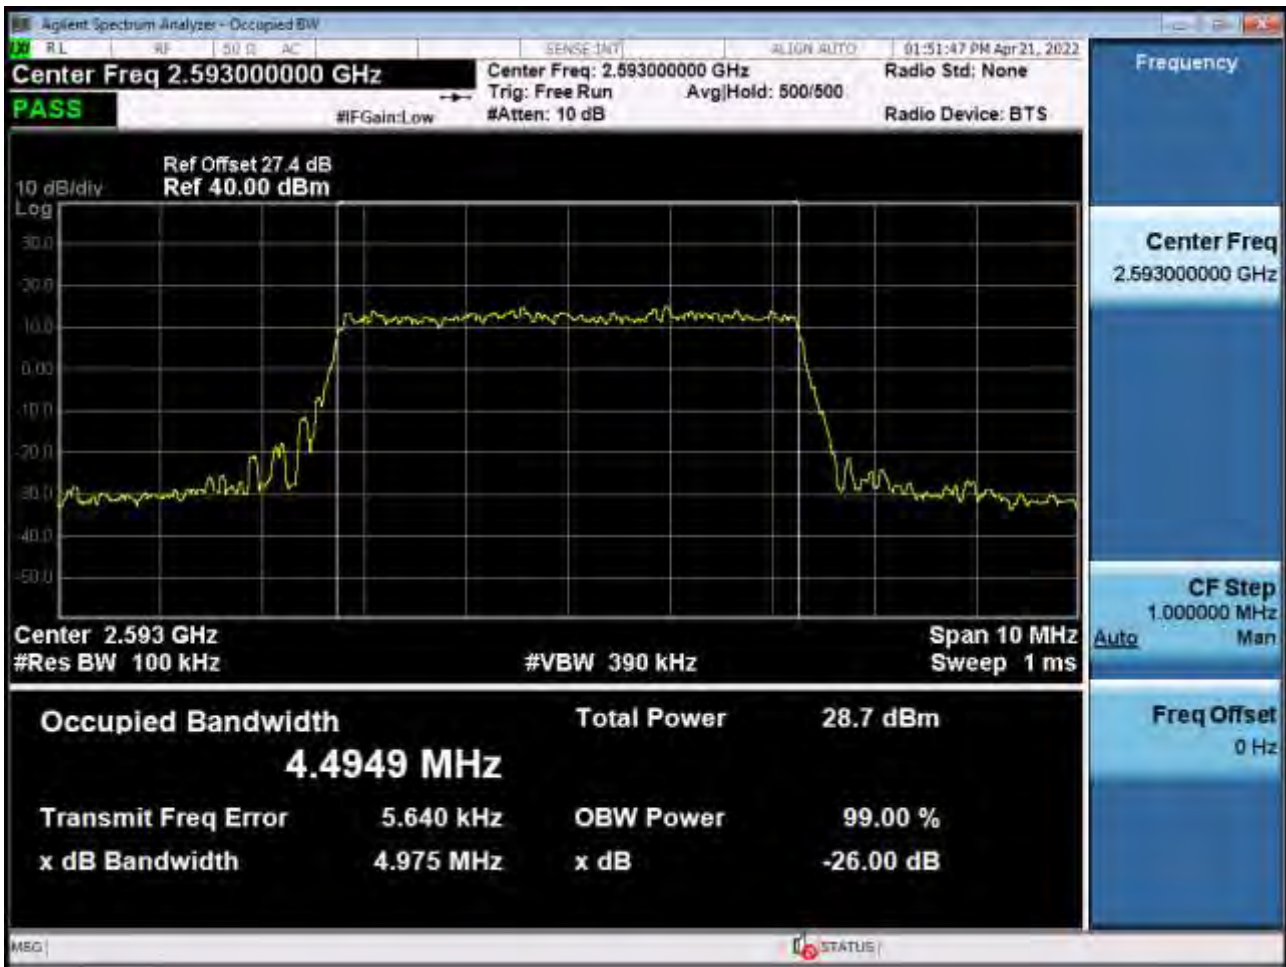


Occupied Bandwidth Plot (10 MHz Ch.40620 QPSK RB 50) (POWER CLASS 2)

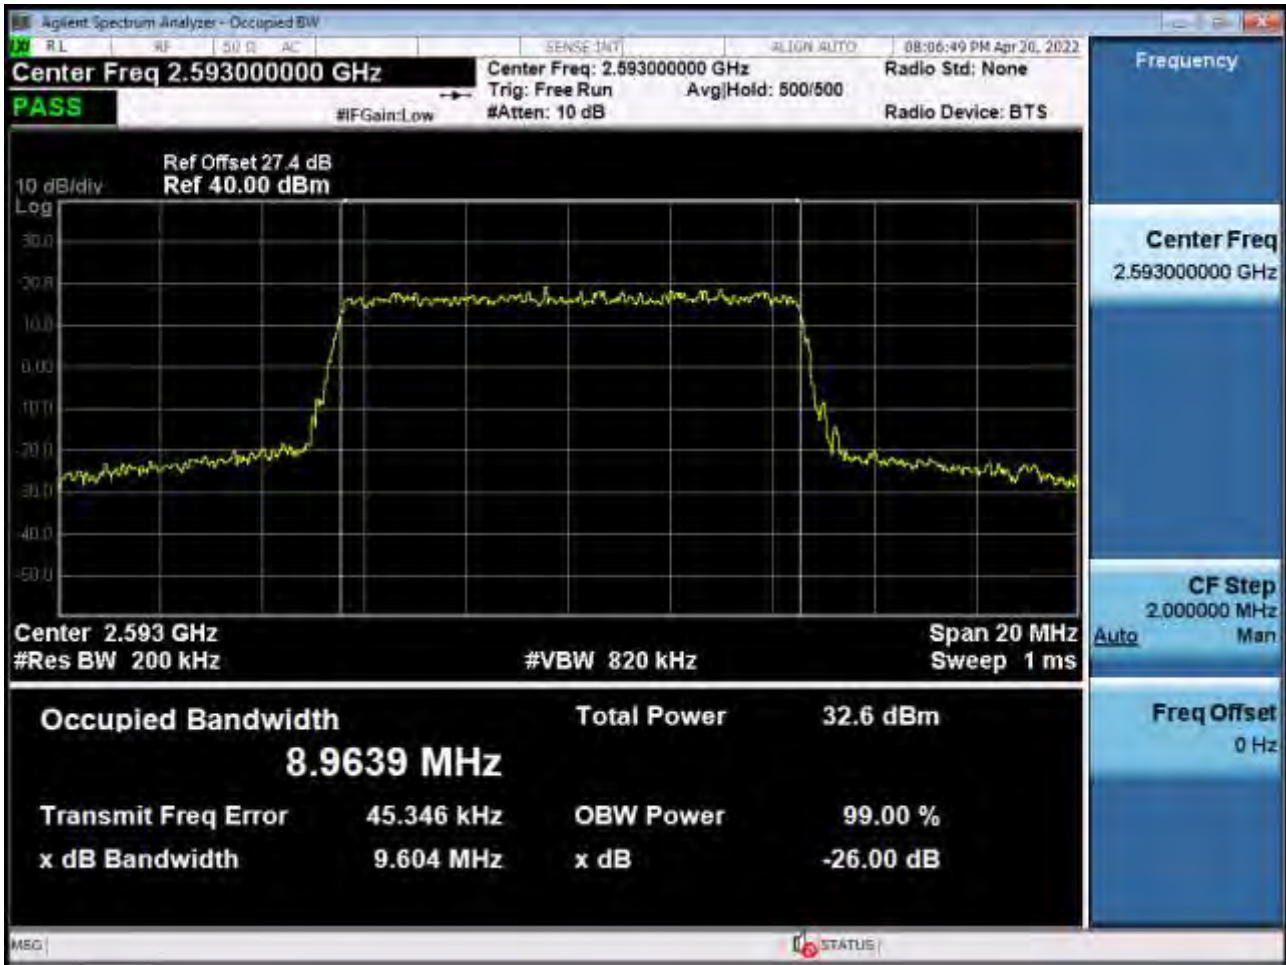


Occupied Bandwidth Plot (10 MHz Ch.40620 16-QAM RB 50) (POWER CLASS 2)



Occupied Bandwidth Plot (10 MHz Ch.40620 64-QAM RB 50) (POWER CLASS 2)

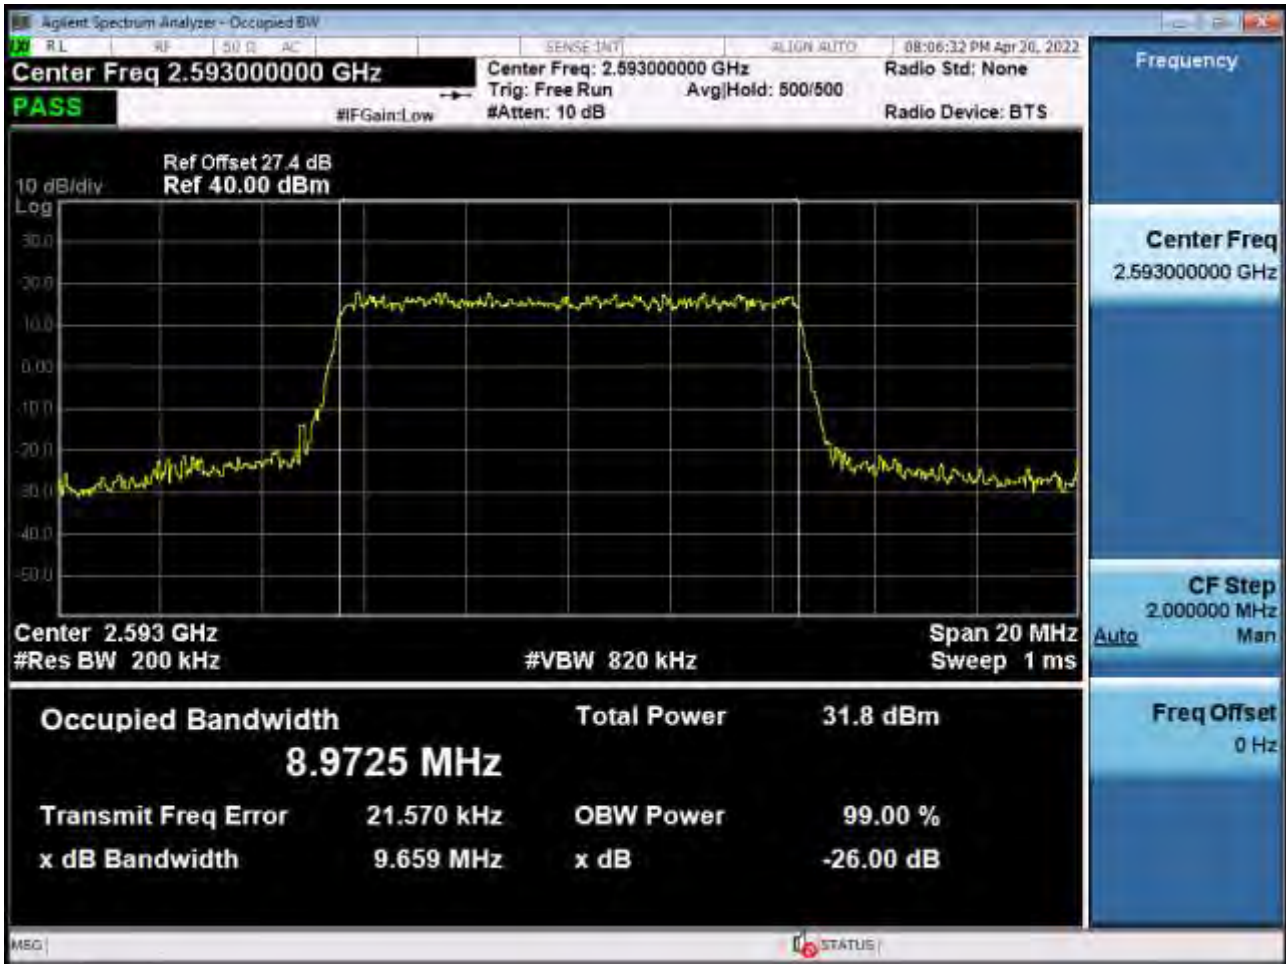


Occupied Bandwidth Plot (10 MHz Ch.40620 256-QAM RB 50) (POWER CLASS 2)

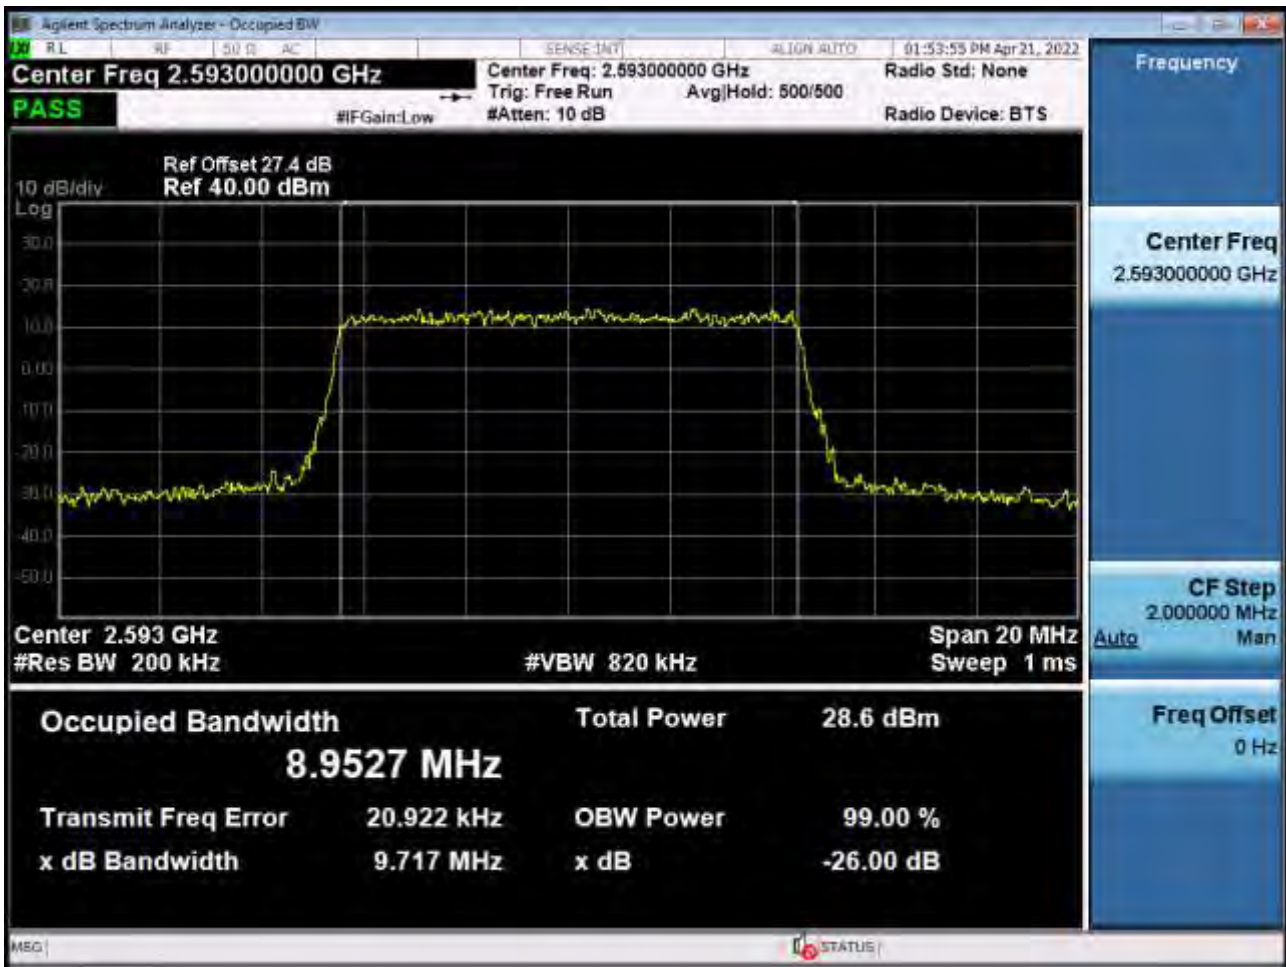


Occupied Bandwidth Plot (15 MHz Ch.40620 QPSK RB 75) (POWER CLASS 2)




Occupied Bandwidth Plot (15 MHz Ch.40620 16-QAM RB 75) (POWER CLASS 2)

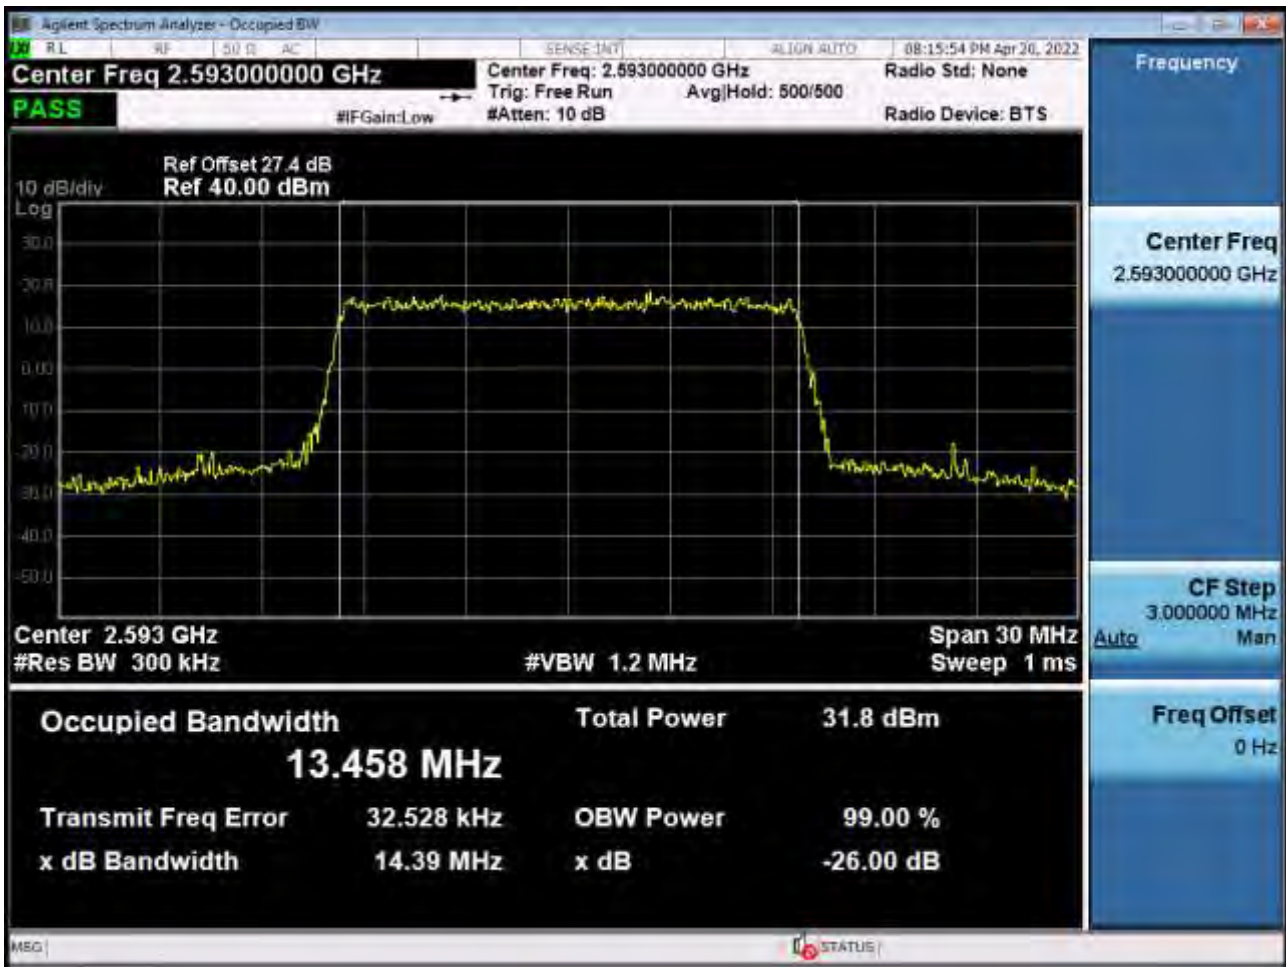


Occupied Bandwidth Plot (15 MHz Ch.40620 64-QAM RB 75) (POWER CLASS 2)

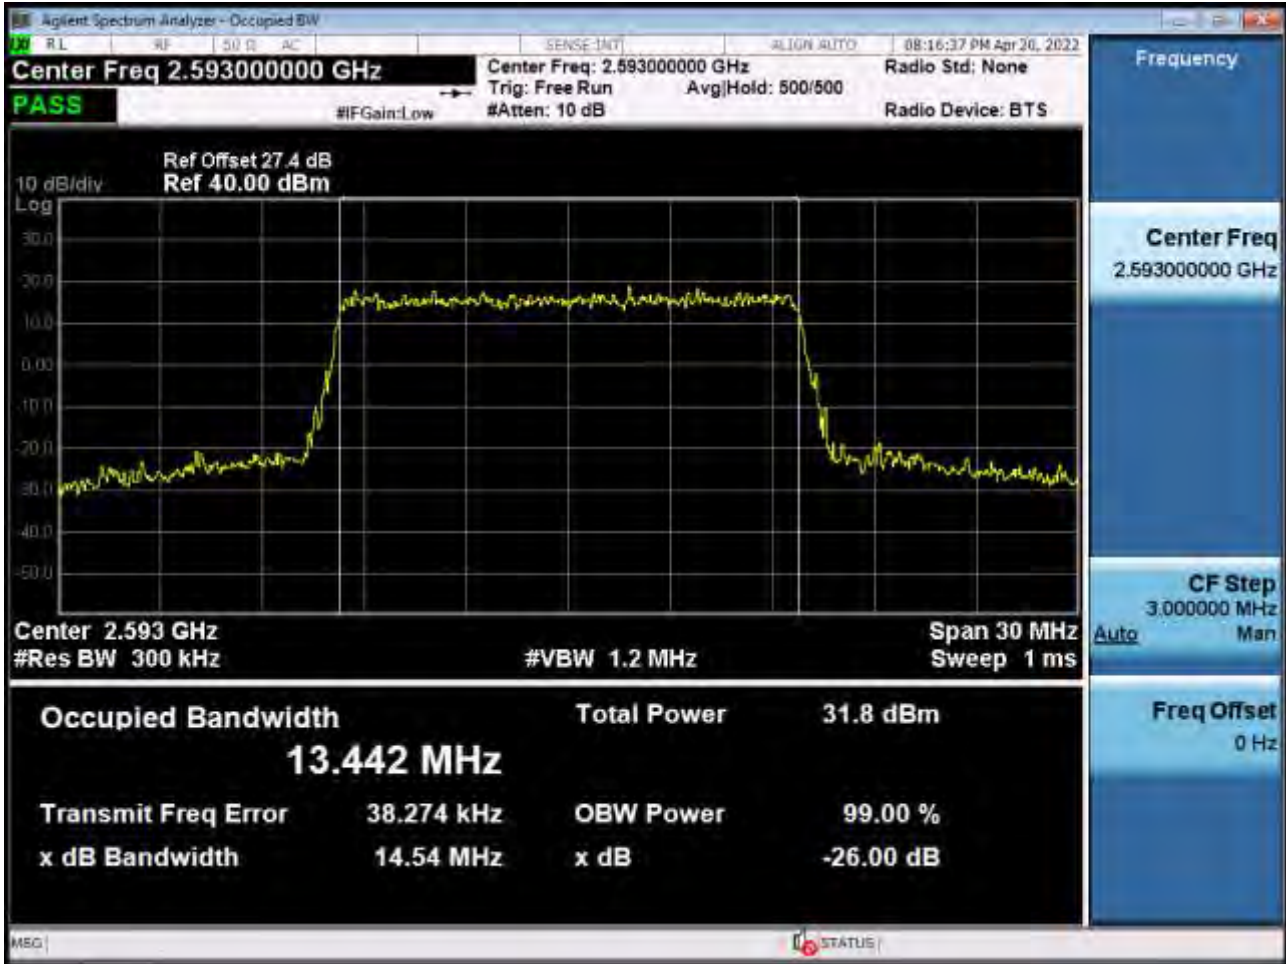


Occupied Bandwidth Plot (15 MHz Ch.40620 256-QAM RB 75) (POWER CLASS 2)

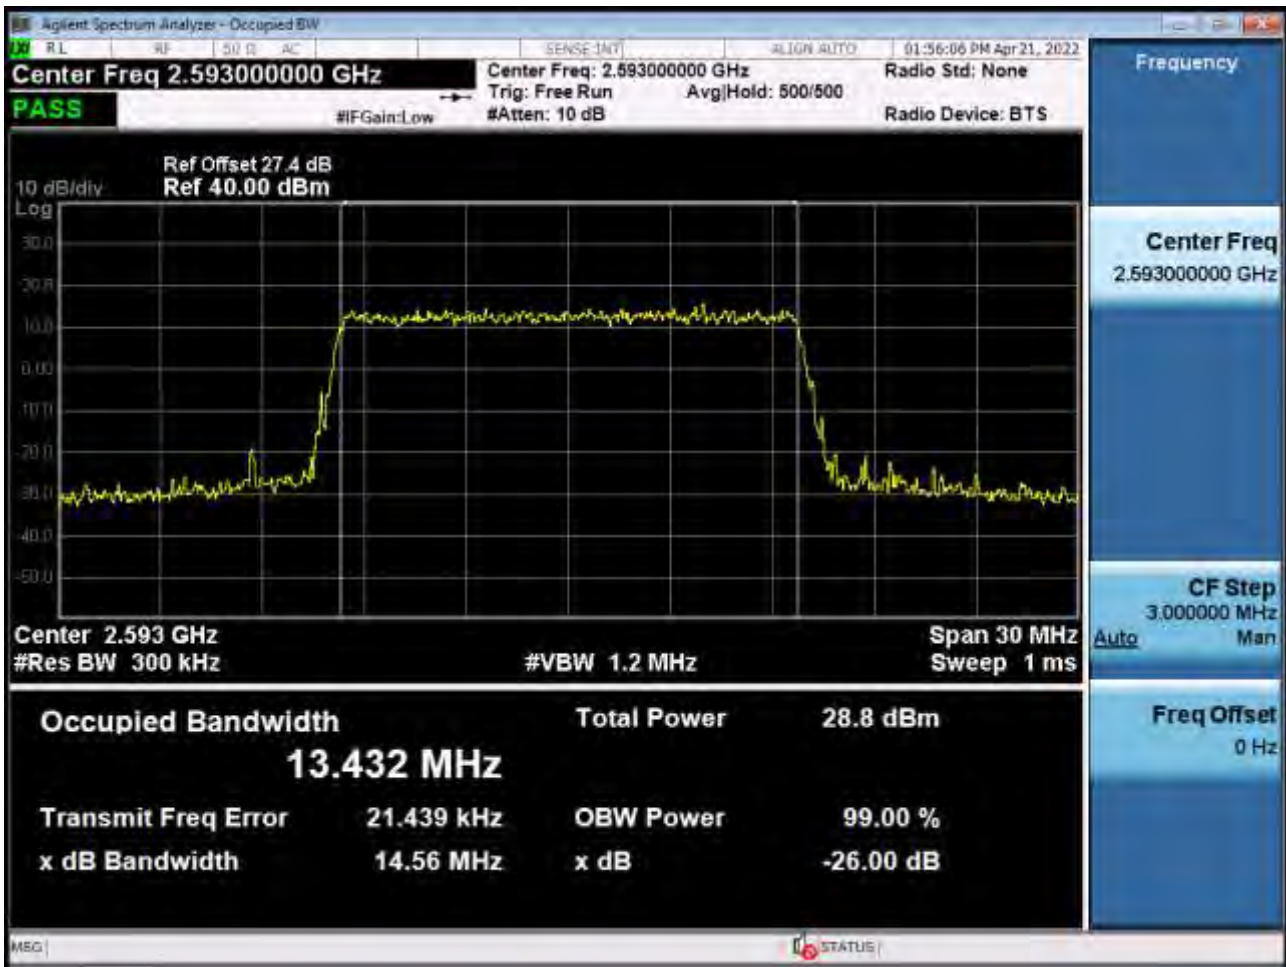


Occupied Bandwidth Plot (20 MHz Ch.40620 QPSK RB 100) (POWER CLASS 2)

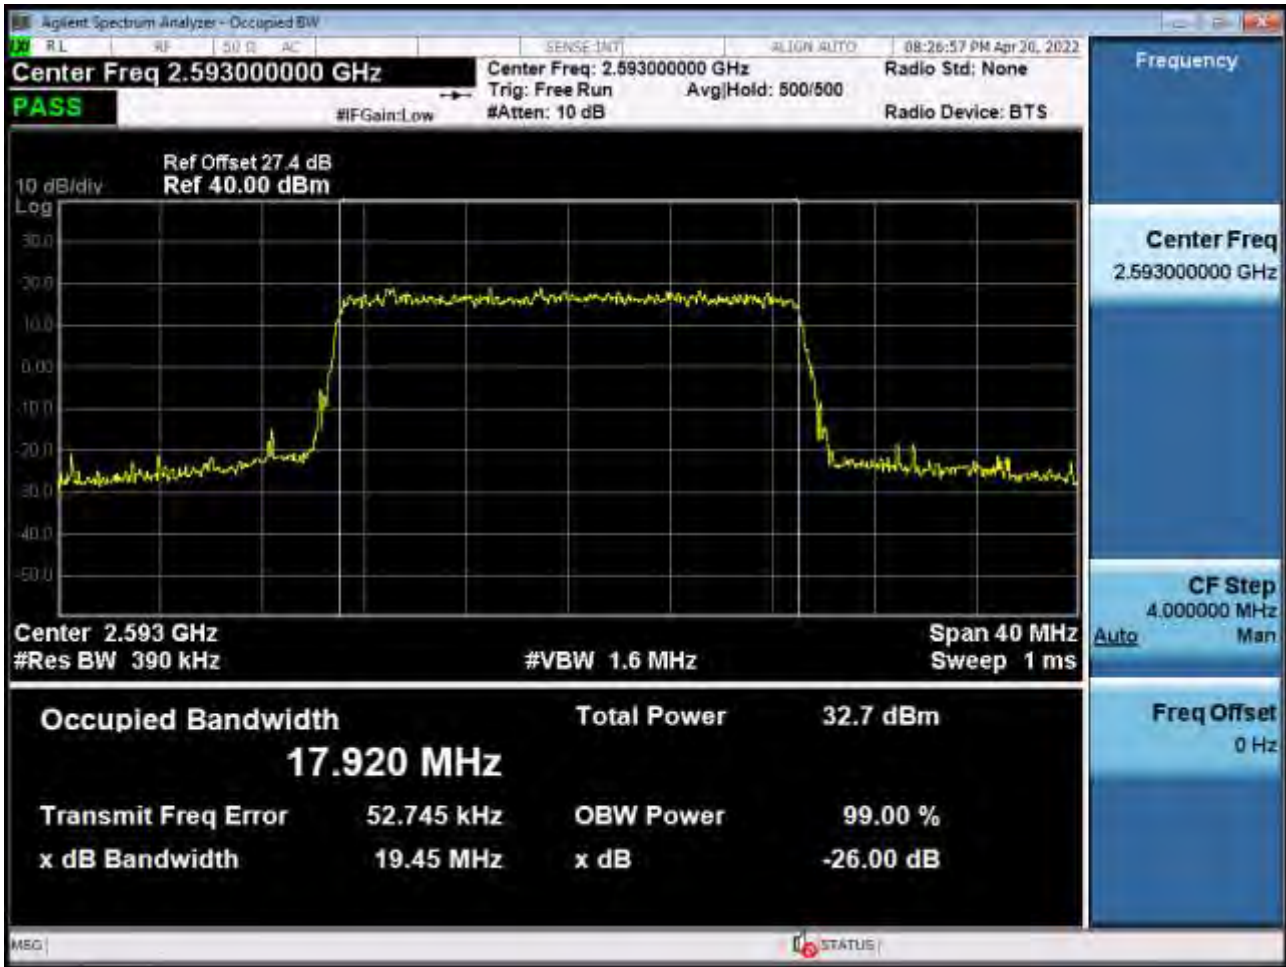


Occupied Bandwidth Plot (20 MHz Ch.40620 16-QAM RB 100) (POWER CLASS 2)

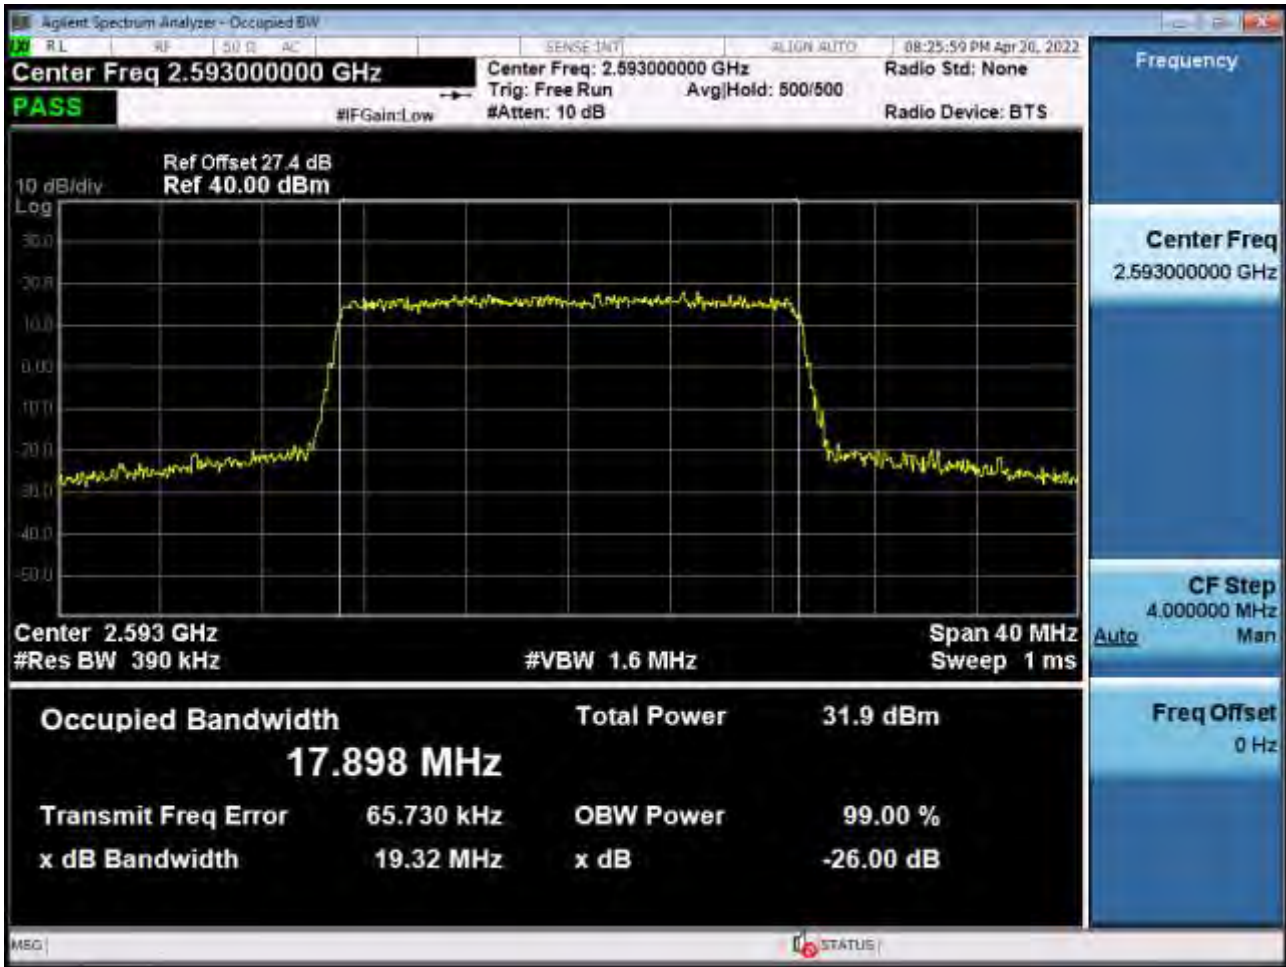

Occupied Bandwidth Plot (20 MHz Ch.40620 64-QAM RB 100) (POWER CLASS 2)

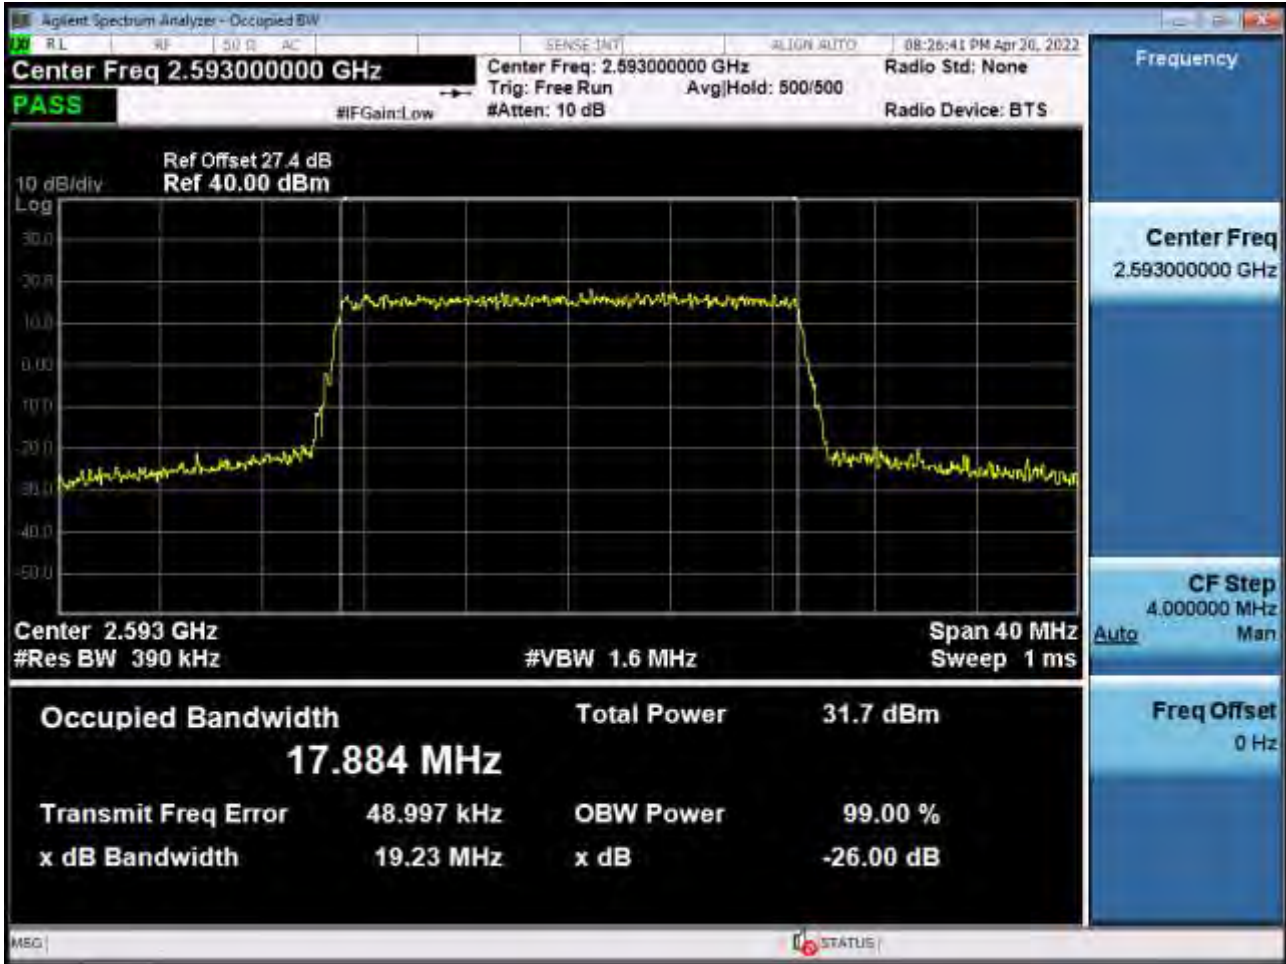


Occupied Bandwidth Plot (20 MHz Ch.40620 256-QAM RB 100) (POWER CLASS 2)

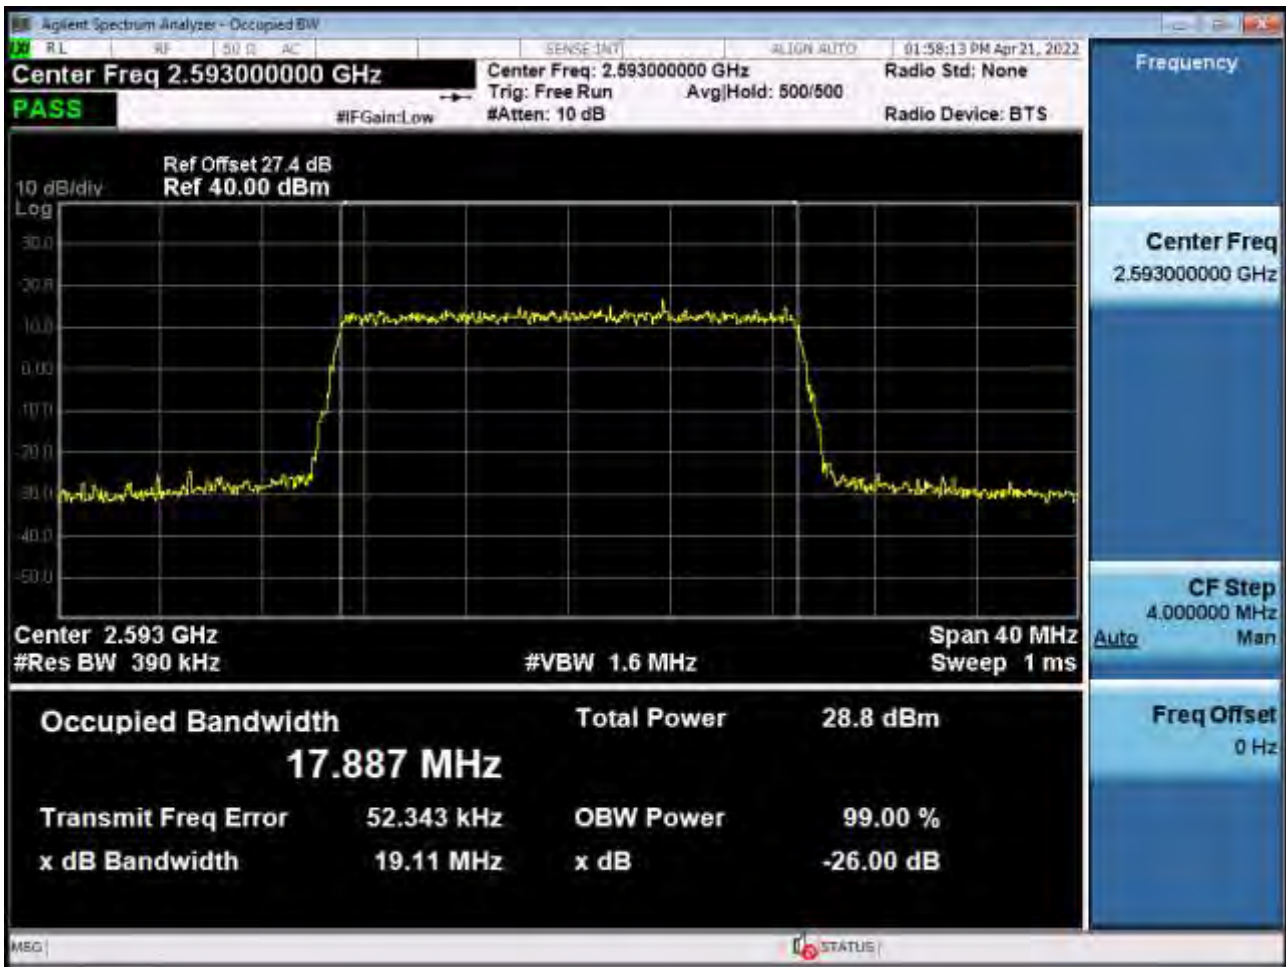

PAR Plot (5M BW_Ch.40620_QPSK_RB25_0) (POWER CLASS 3)



PAR Plot (5M BW_Ch.40620_16QAM_RB25_0) (POWER CLASS 3)

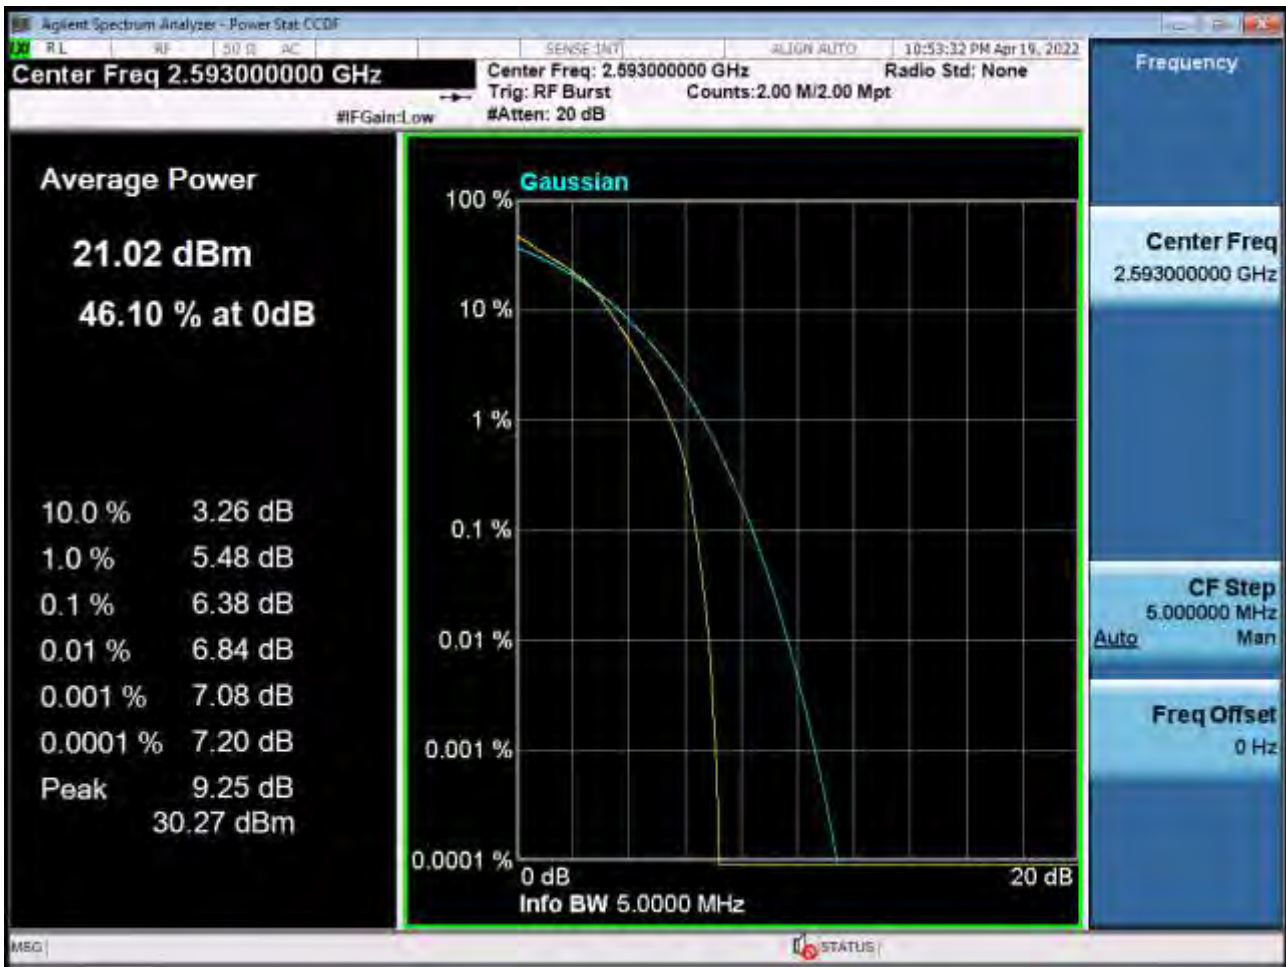

PAR Plot (5M BW_Ch.40620_64QAM_RB25_0) (POWER CLASS 3)




PAR Plot (5M BW_Ch.40620_256QAM_RB25_0) (POWER CLASS 3)



PAR Plot (10M BW_Ch.40620_QPSK_RB50_0) (POWER CLASS 3)




PAR Plot (10M BW_Ch.40620_16QAM_RB50_0) (POWER CLASS 3)

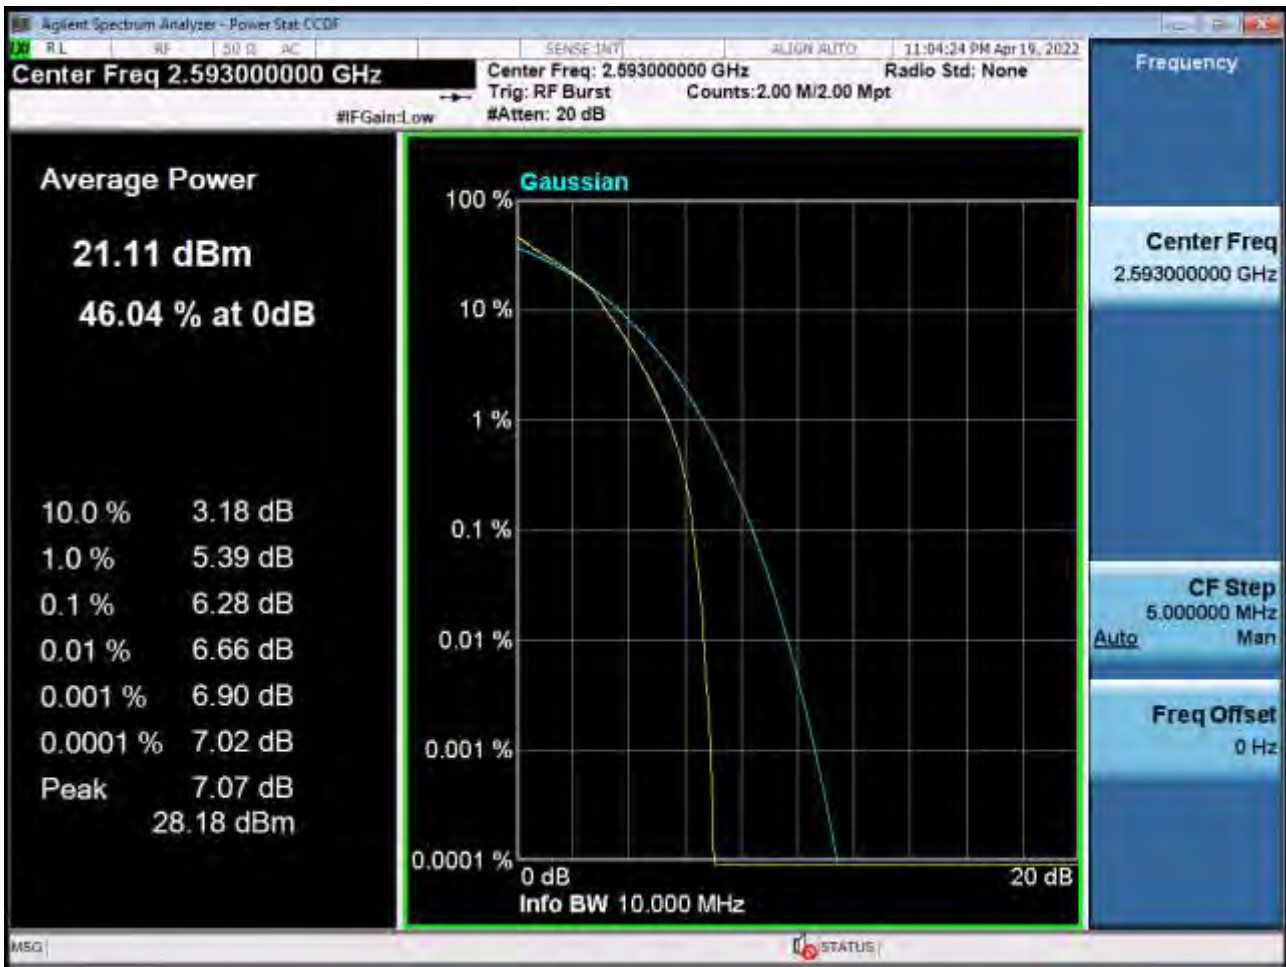

PAR Plot (10M BW_Ch.40620_64QAM_RB50_0) (POWER CLASS 3)



PAR Plot (10M BW_Ch.40620_256QAM_RB50_0) (POWER CLASS 3)

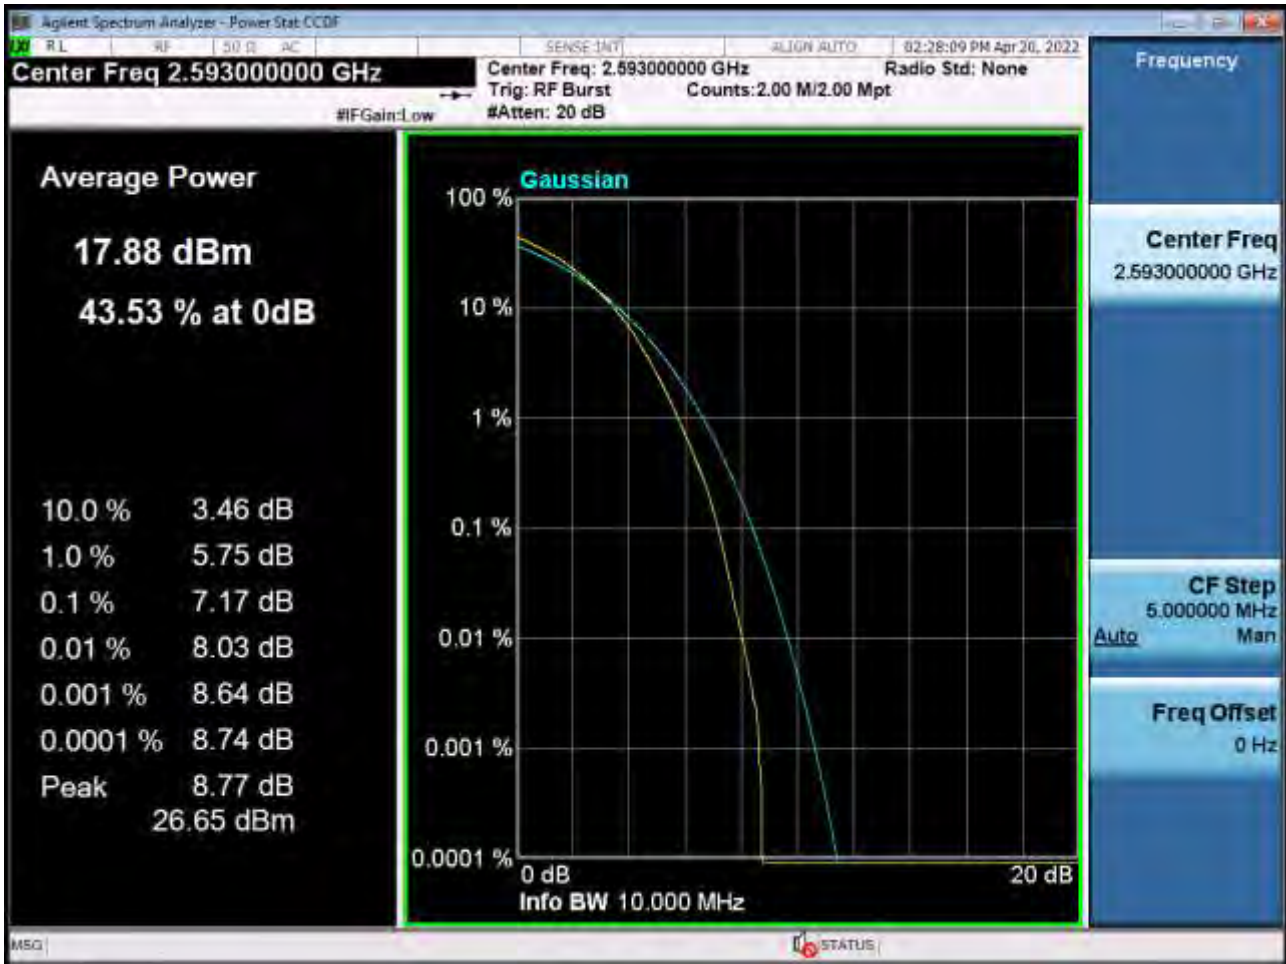

PAR Plot (15M BW_Ch.40620_QPSK_RB75_0) (POWER CLASS 3)



PAR Plot (15M BW_Ch.40620_16QAM_RB75_0) (POWER CLASS 3)



PAR Plot (15M BW_Ch.40620_64QAM_RB75_0) (POWER CLASS 3)




PAR Plot (15M BW_Ch.40620_256QAM_RB75_0) (POWER CLASS 3)



PAR Plot (20M BW_Ch.40620_QPSK_RB100_0) (POWER CLASS 3)



PAR Plot (20M BW_Ch.40620_16QAM_RB100_0) (POWER CLASS 3)

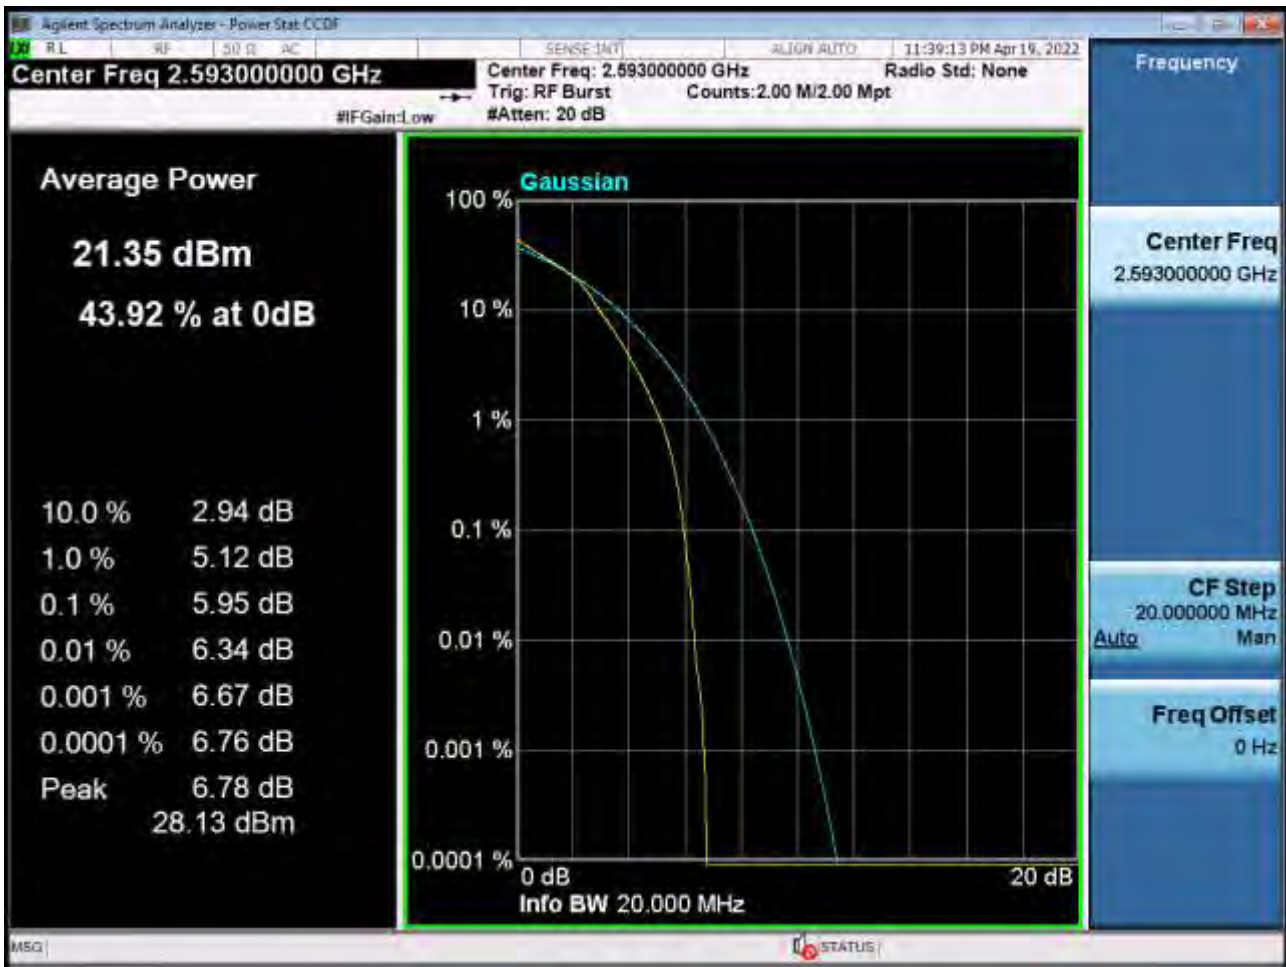

PAR Plot (20M BW_Ch.40620_64QAM_RB100_0) (POWER CLASS 3)



PAR Plot (20M BW_Ch.40620_256QAM_RB100_0) (POWER CLASS 3)



PAR Plot (5M BW_Ch.40620_QPSK_RB25_0) (POWER CLASS 2)



PAR Plot (5M BW_Ch.40620_16QAM_RB25_0) (POWER CLASS 2)



PAR Plot (5M BW_Ch.40620_64QAM_RB25_0) (POWER CLASS 2)




PAR Plot (5M BW_Ch.40620_256QAM_RB25_0) (POWER CLASS 2)




PAR Plot (10M BW_Ch.40620_QPSK_RB50_0) (POWER CLASS 2)



PAR Plot (10M BW_Ch.40620_16QAM_RB50_0) (POWER CLASS 2)

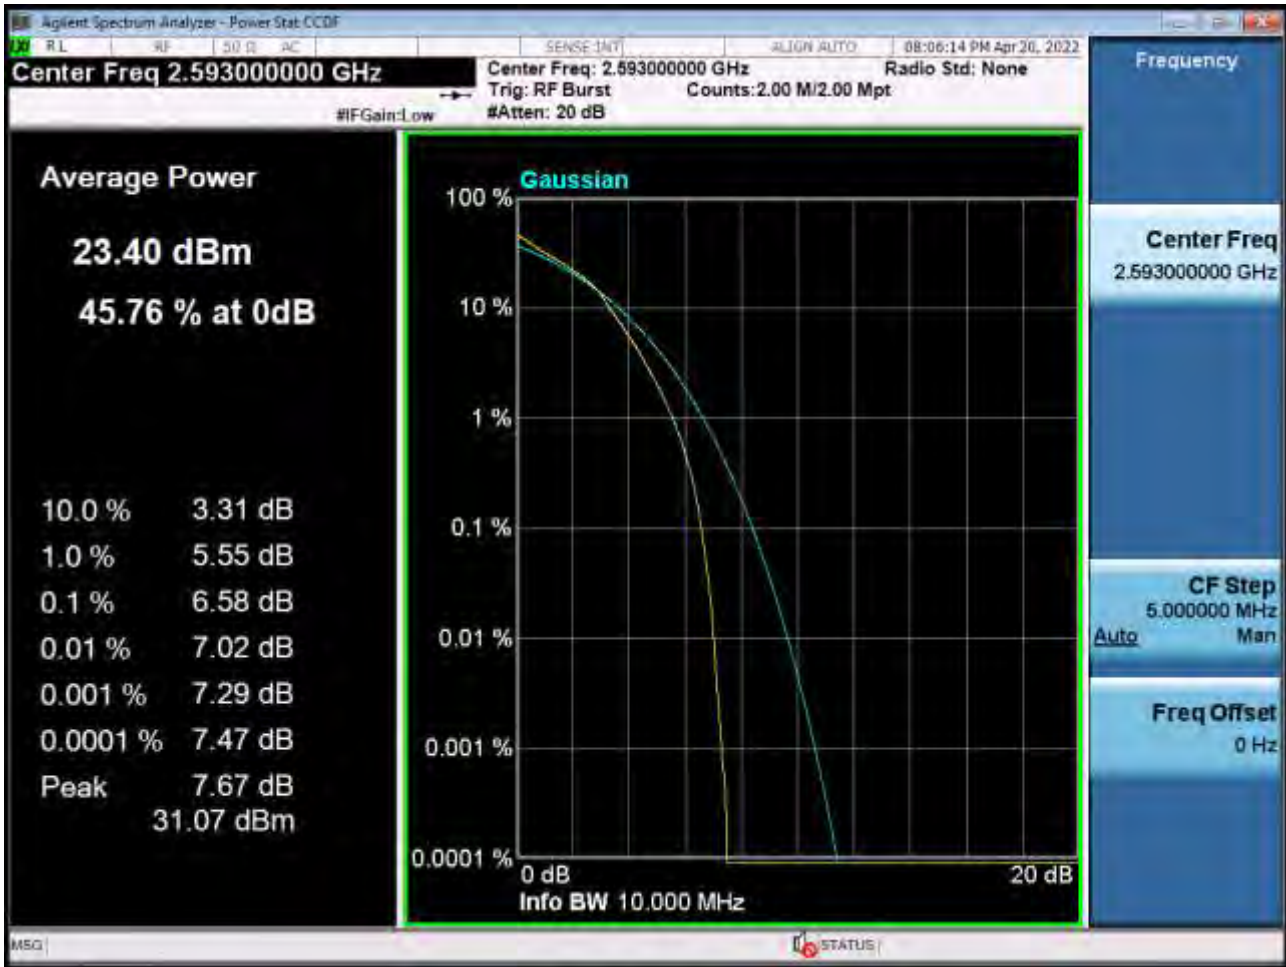

PAR Plot (10M BW_Ch.40620_64QAM_RB50_0) (POWER CLASS 2)

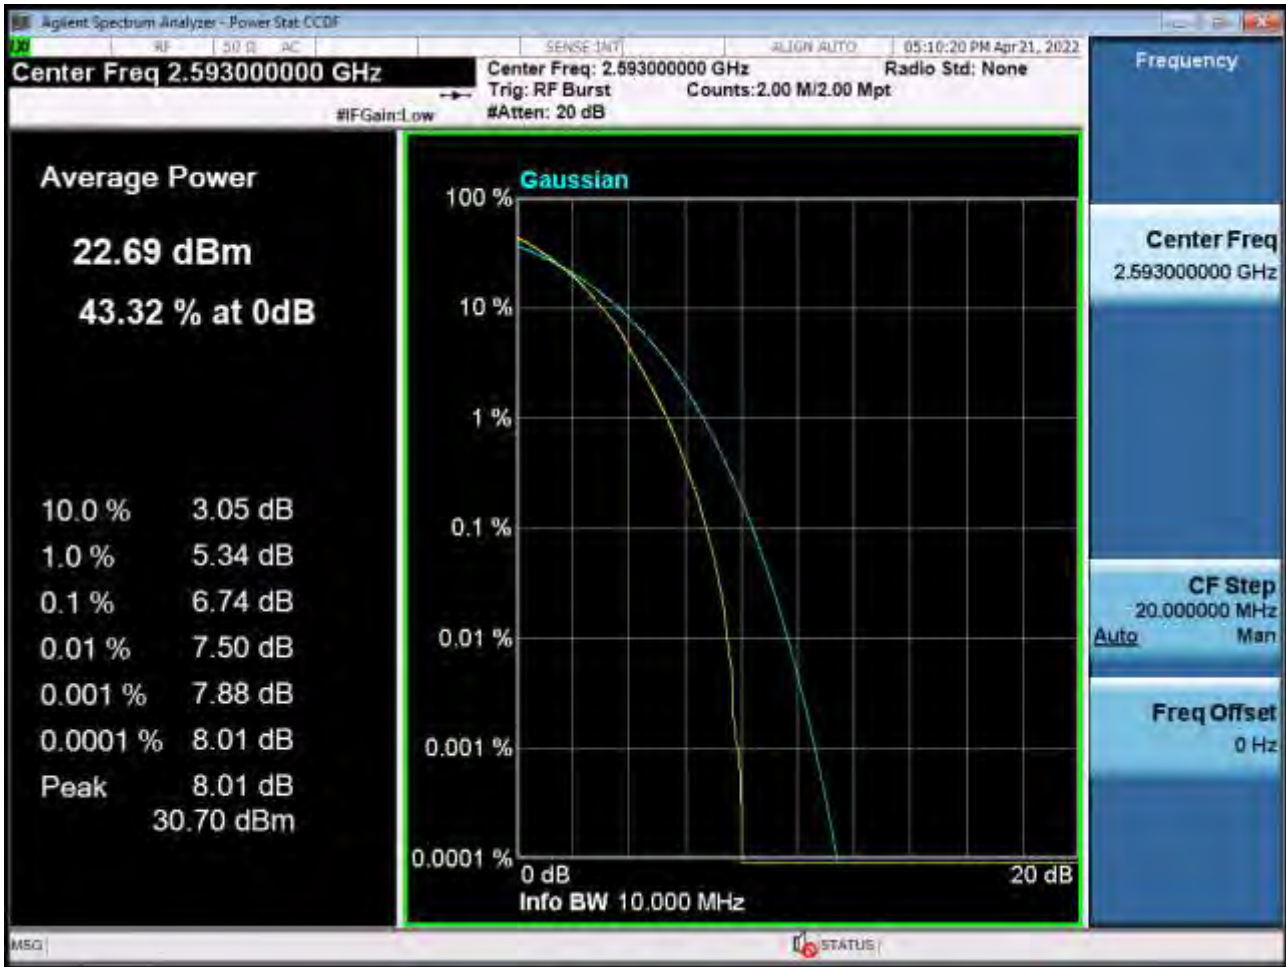


PAR Plot (10M BW_Ch.40620_256QAM_RB50_0) (POWER CLASS 2)



PAR Plot (15M BW_Ch.40620_QPSK_RB75_0) (POWER CLASS 2)



PAR Plot (15M BW_Ch.40620_16QAM_RB75_0) (POWER CLASS 2)

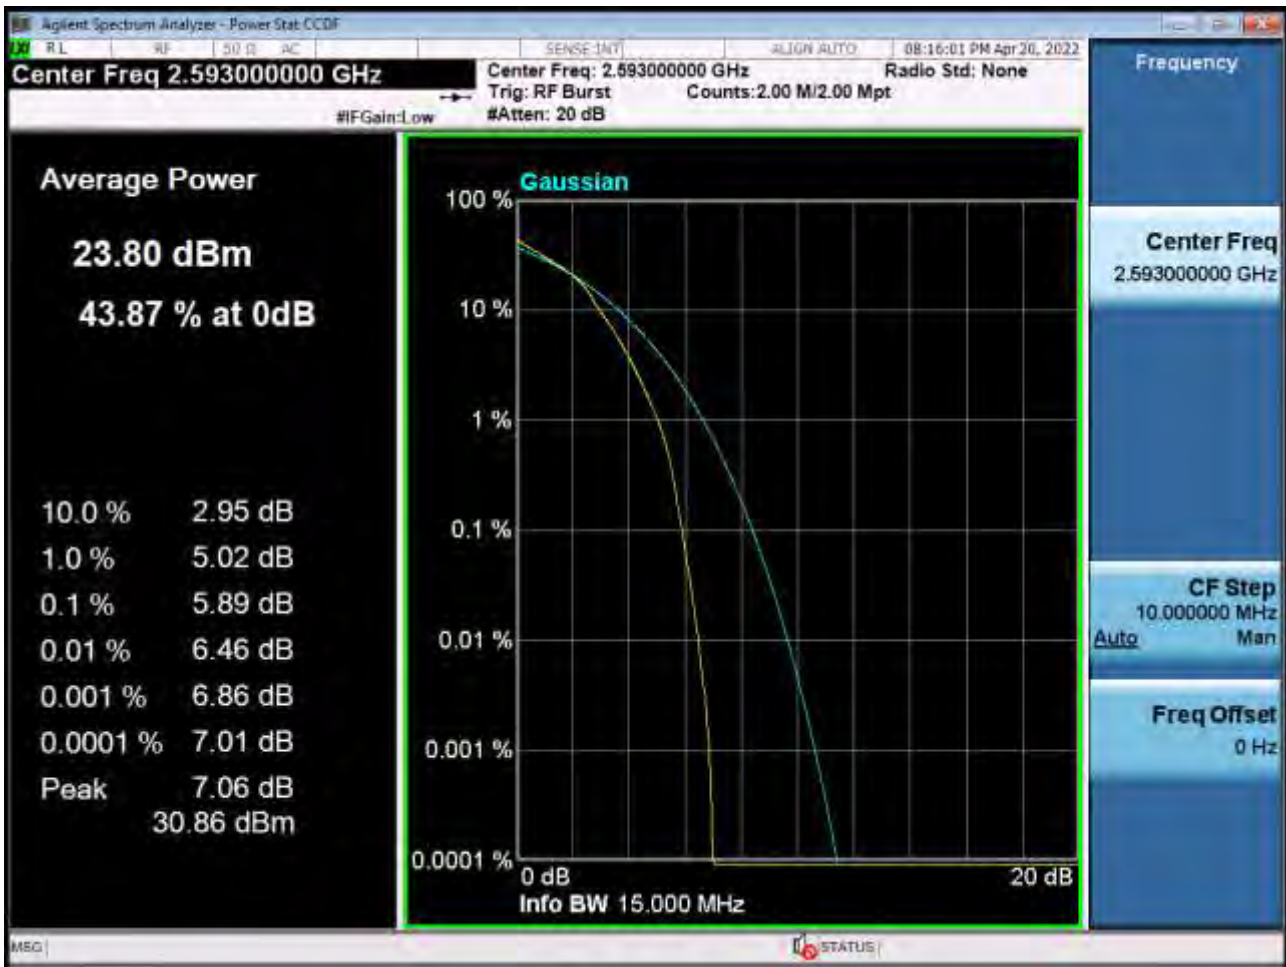

PAR Plot (15M BW_Ch.40620_64QAM_RB75_0) (POWER CLASS 2)




PAR Plot (15M BW_Ch.40620_256QAM_RB75_0) (POWER CLASS 2)




PAR Plot (20M BW_Ch.40620_QPSK_RB100_0) (POWER CLASS 2)



PAR Plot (20M BW_Ch.40620_16QAM_RB100_0) (POWER CLASS 2)

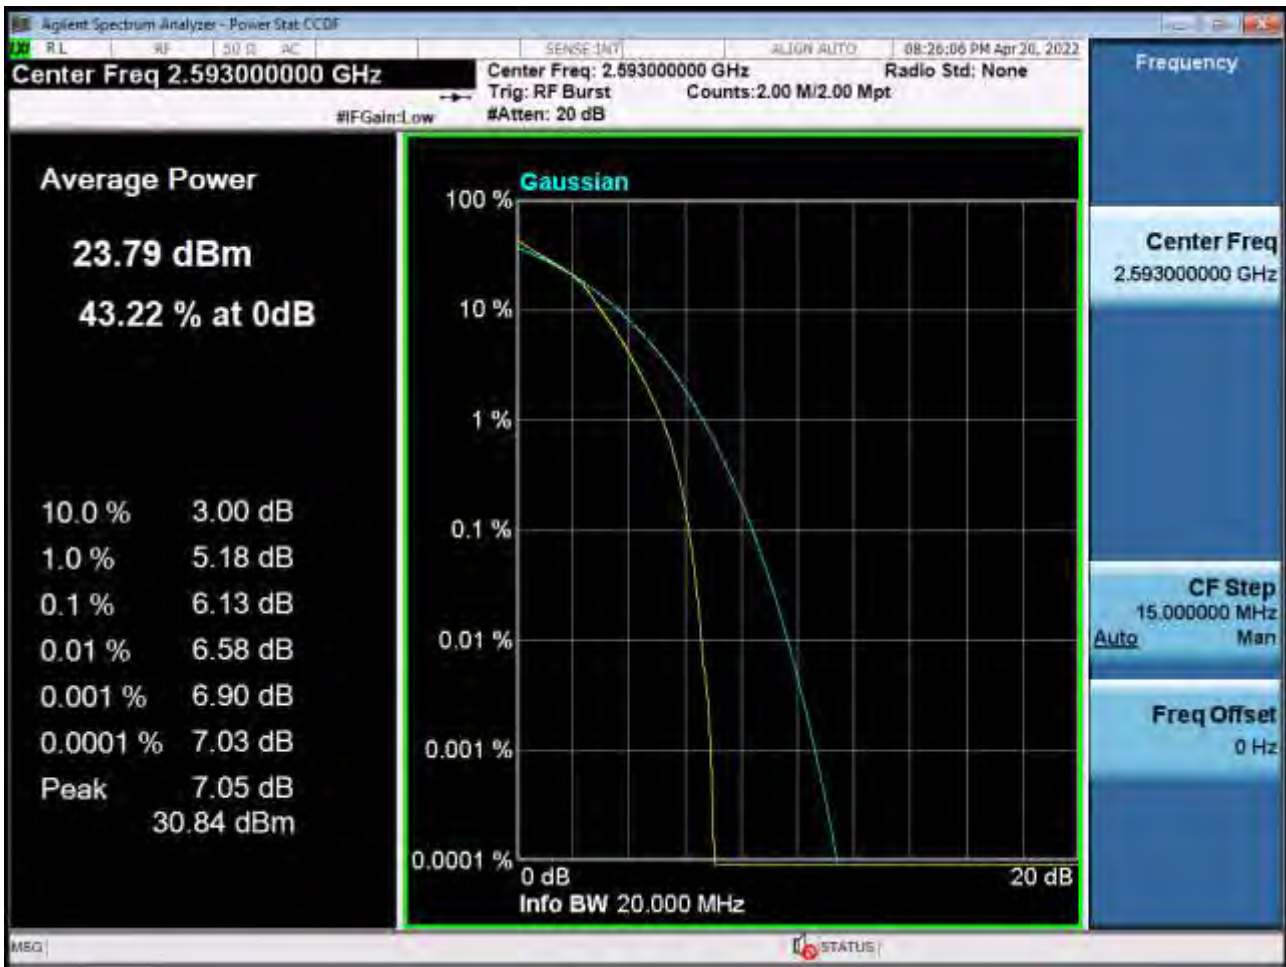

PAR Plot (20M BW_Ch.40620_64QAM_RB100_0) (POWER CLASS 2)

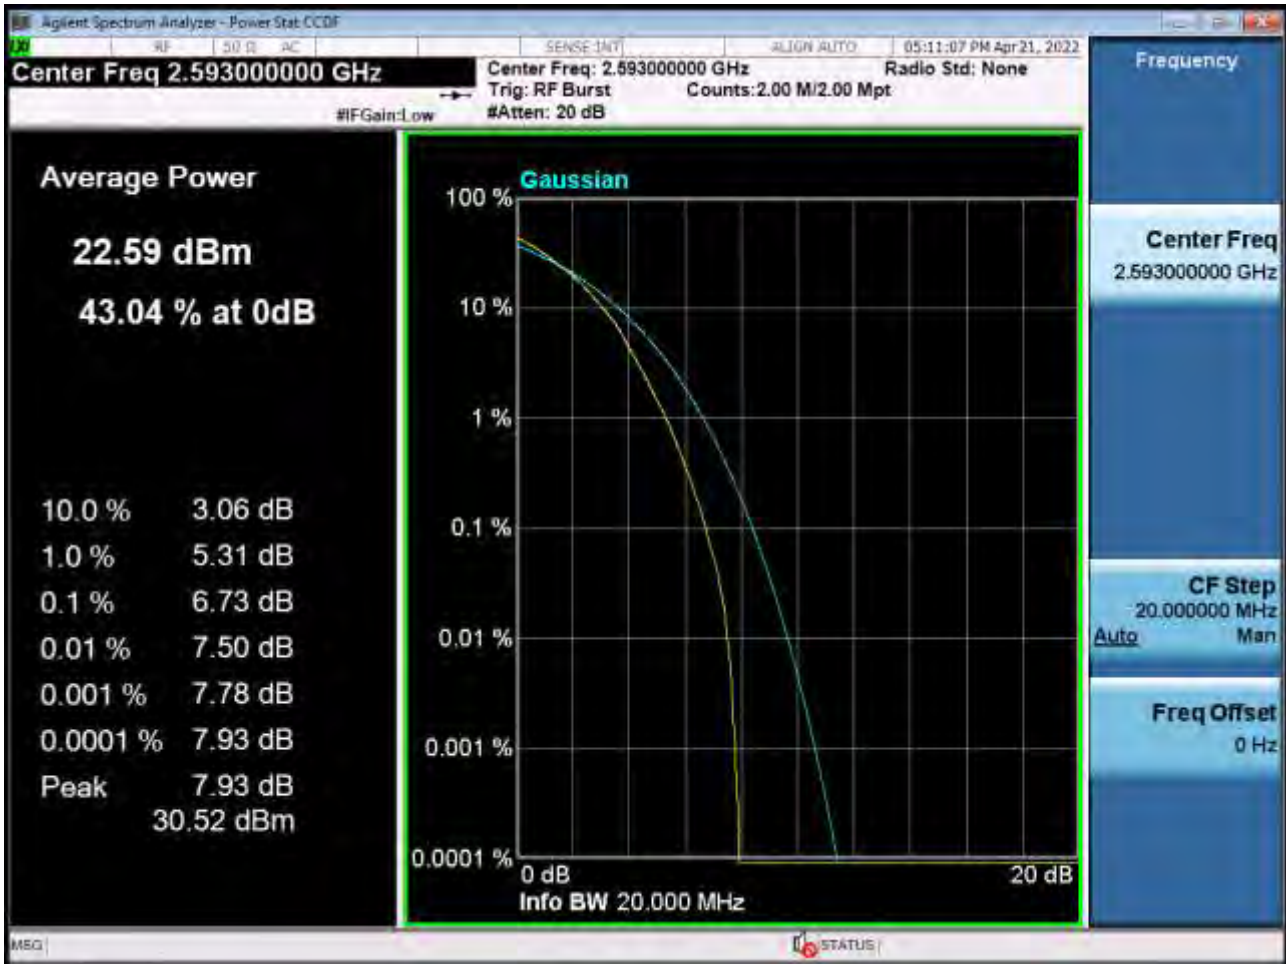


PAR Plot (20M BW_Ch.40620_256QAM_RB100_0) (POWER CLASS 2)



Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 1, Offset 0)-1 (POWER CLASS 3)




Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 1, Offset 0)-2 (POWER CLASS 3)

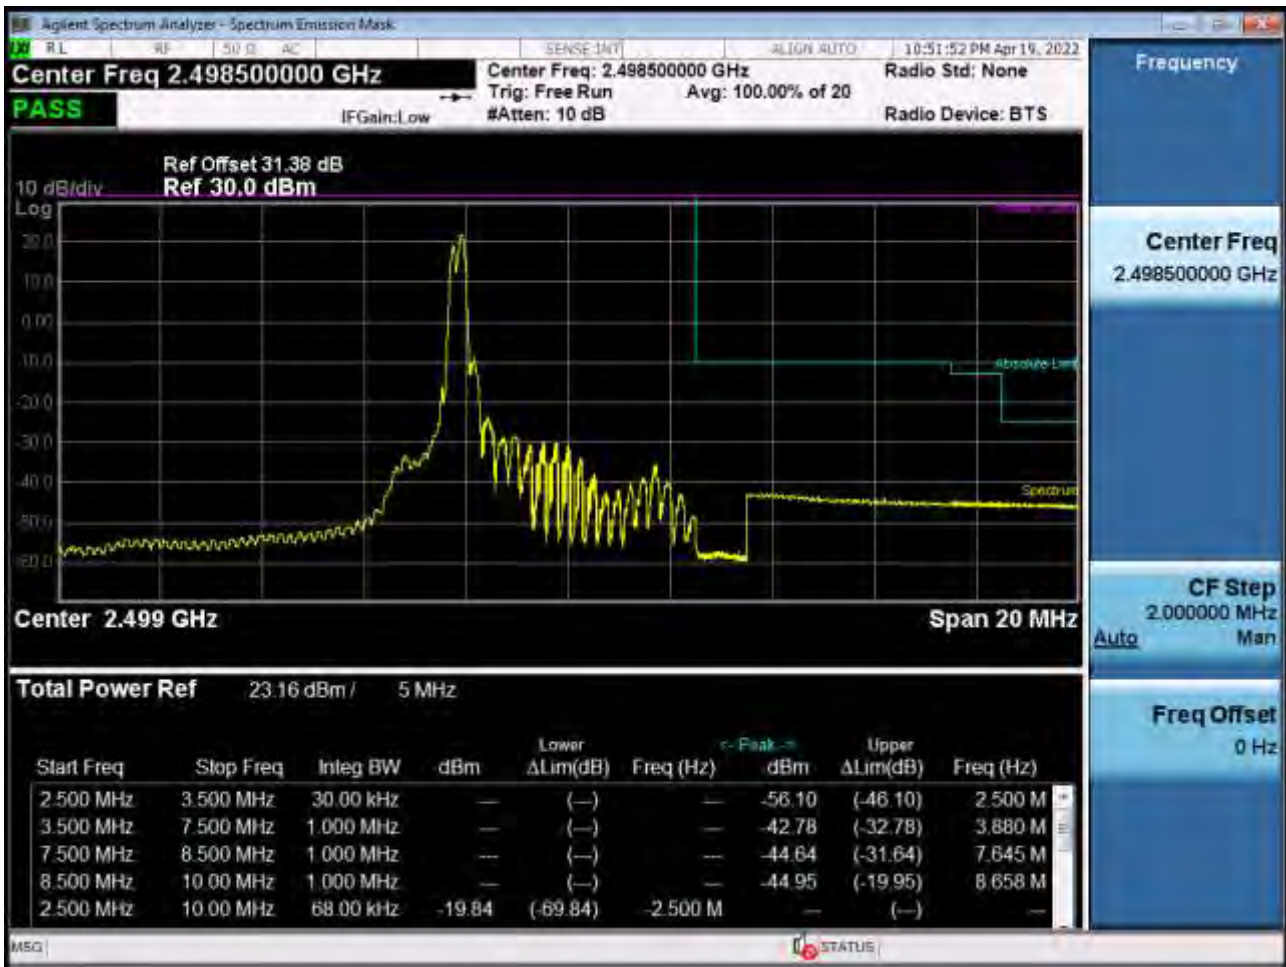

Low Channel Edge Plot (5 MHz Ch.39675 QPSK_RB25_Offset 0)-1 (POWER CLASS 3)




Low Channel Edge Plot (5 MHz Ch.39675 QPSK_RB25_Offset 0)-2 (POWER CLASS 3)

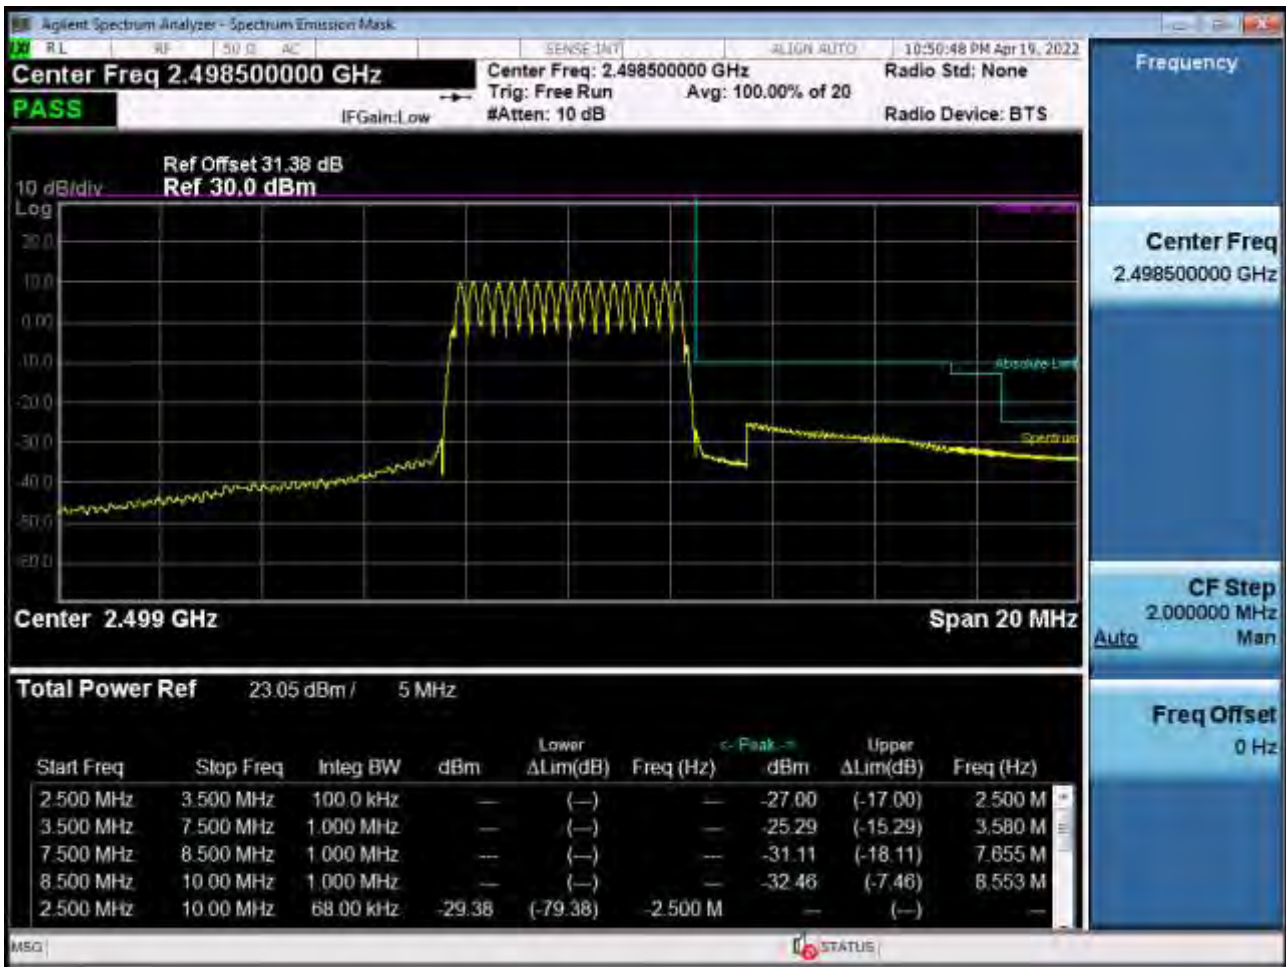

Low Channel Edge Plot (5 MHz Ch.39715 QPSK RB 1, Offset 0)-1 (POWER CLASS 3)



Low Channel Edge Plot (5 MHz Ch.39715 QPSK RB 1, Offset 0)-2 (POWER CLASS 3)

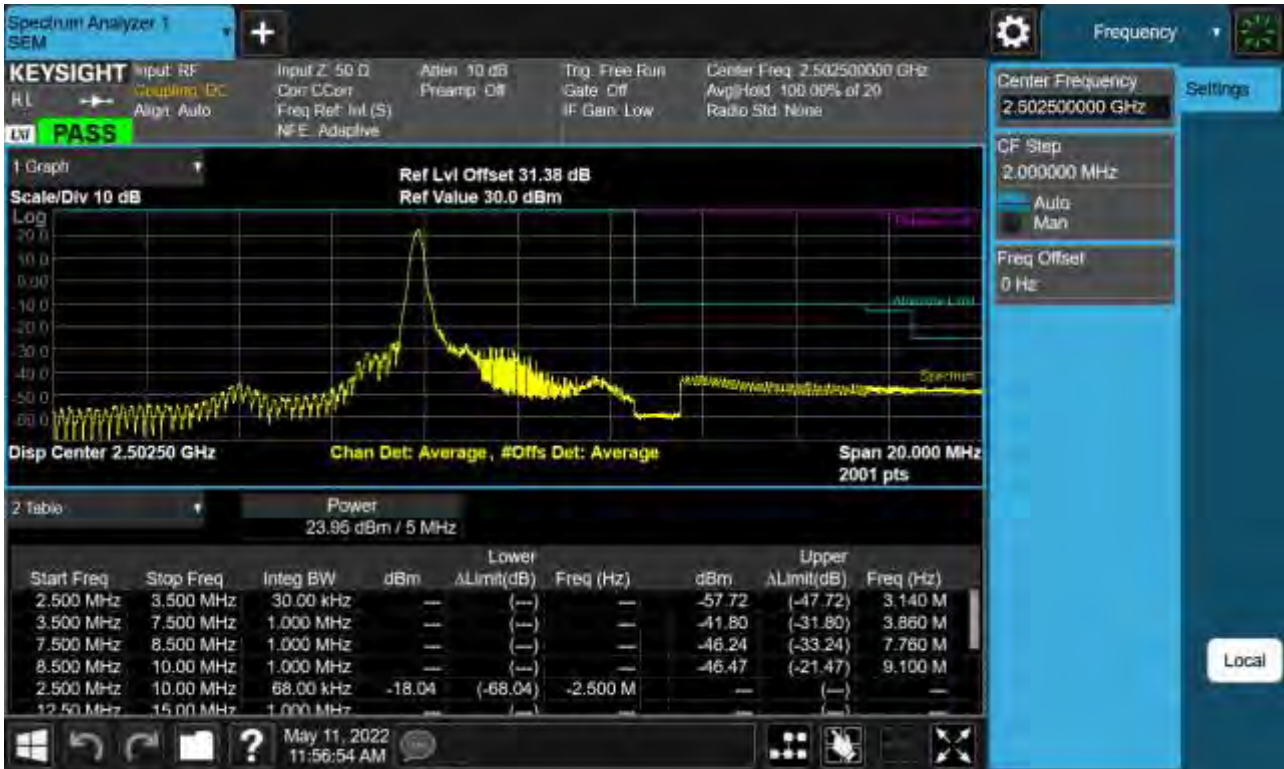

Low Channel Edge Plot (5 MHz Ch.39715 QPSK_RB25_Offset 0)-1 (POWER CLASS 3)




Low Channel Edge Plot (5 MHz Ch.39715 QPSK_RB25_Offset 0)-2 (POWER CLASS 3)




Mid Channel Edge Plot (5 MHz Ch.40620 QPSK RB 25) (POWER CLASS 3)




High Channel Edge Plot (5 MHz Ch.41565 QPSK RB 1, Offset 24) (POWER CLASS 3)

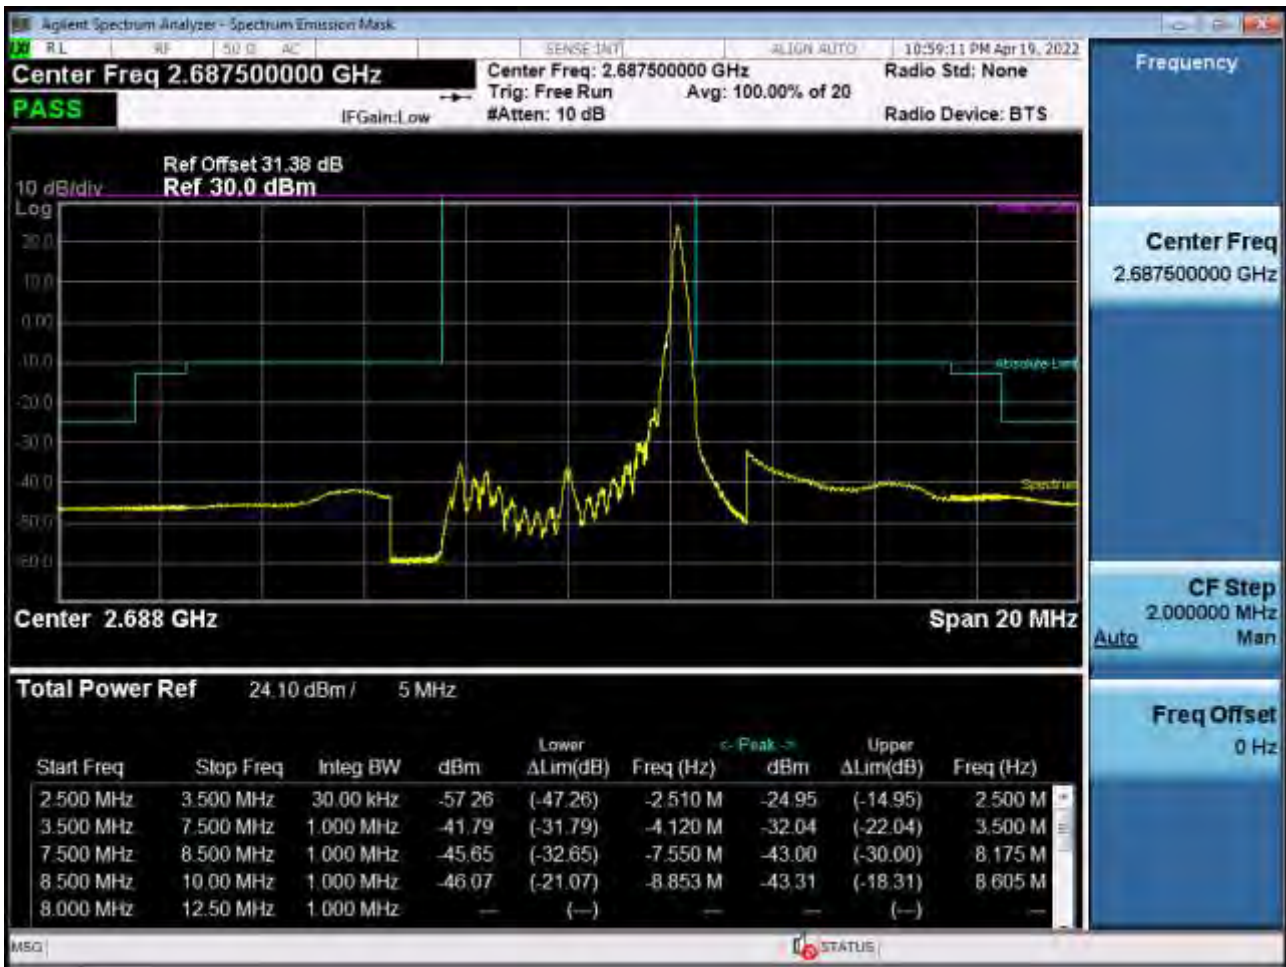


High Channel Edge Plot (5 MHz Ch.41565 QPSK_RB25_Offset 0) (POWER CLASS 3)

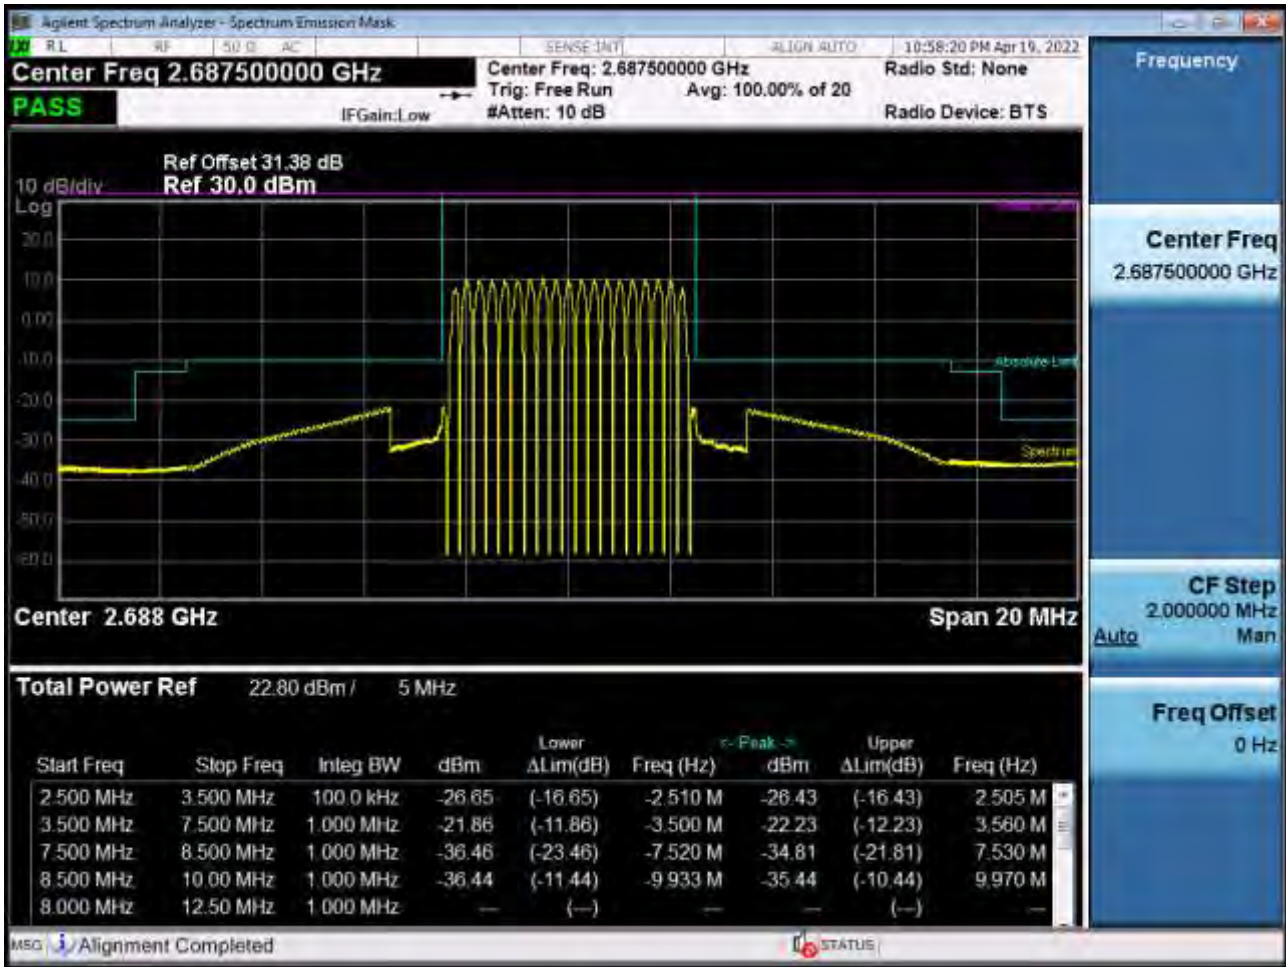

Low Channel Edge Plot (10 MHz Ch.39700 QPSK RB 1, Offset 0)-1 (POWER CLASS 3)

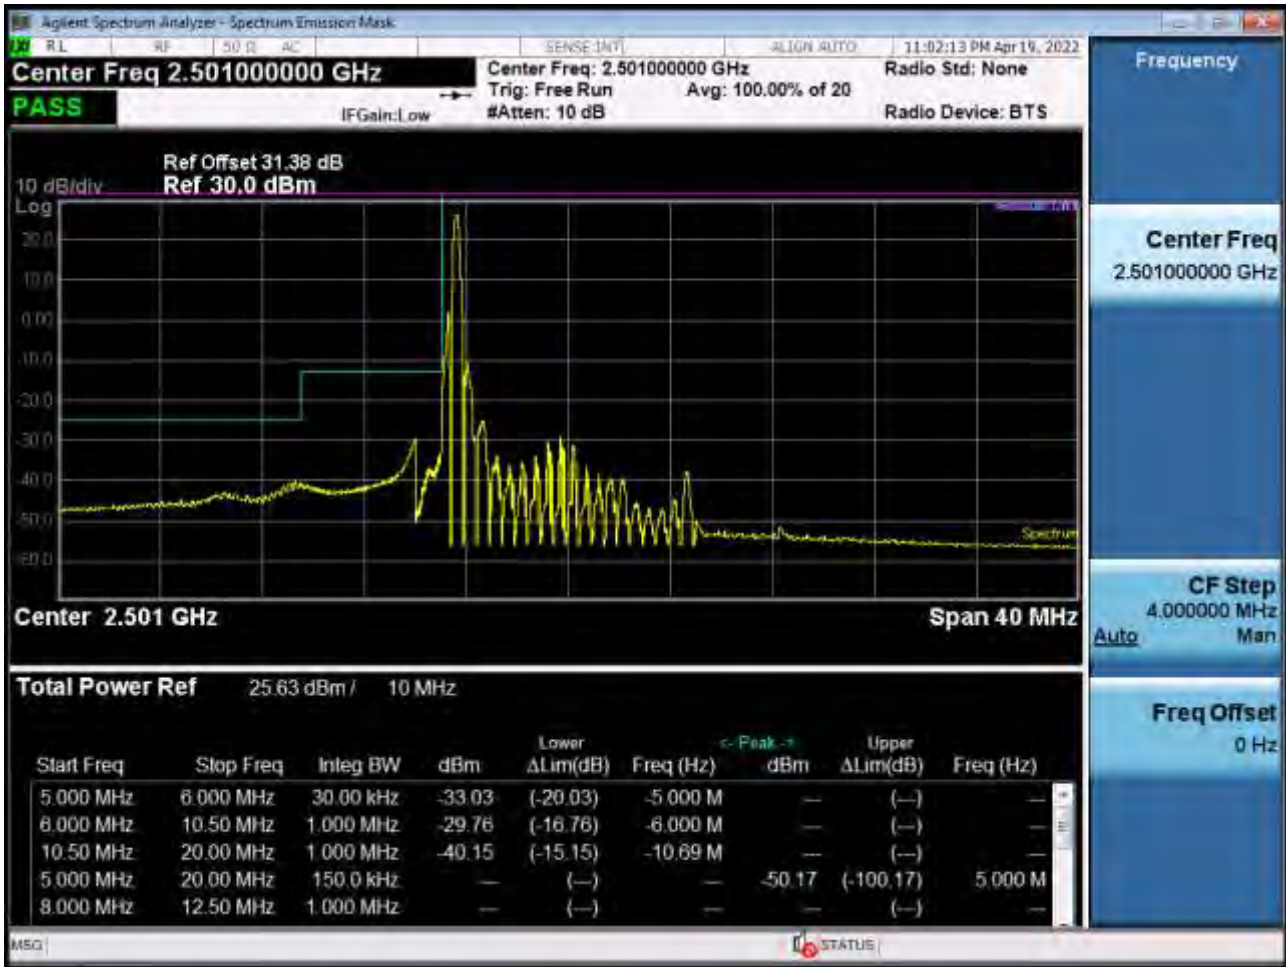

Low Channel Edge Plot (10 MHz Ch.39700 QPSK RB 1, Offset 0)-2 (POWER CLASS 3)

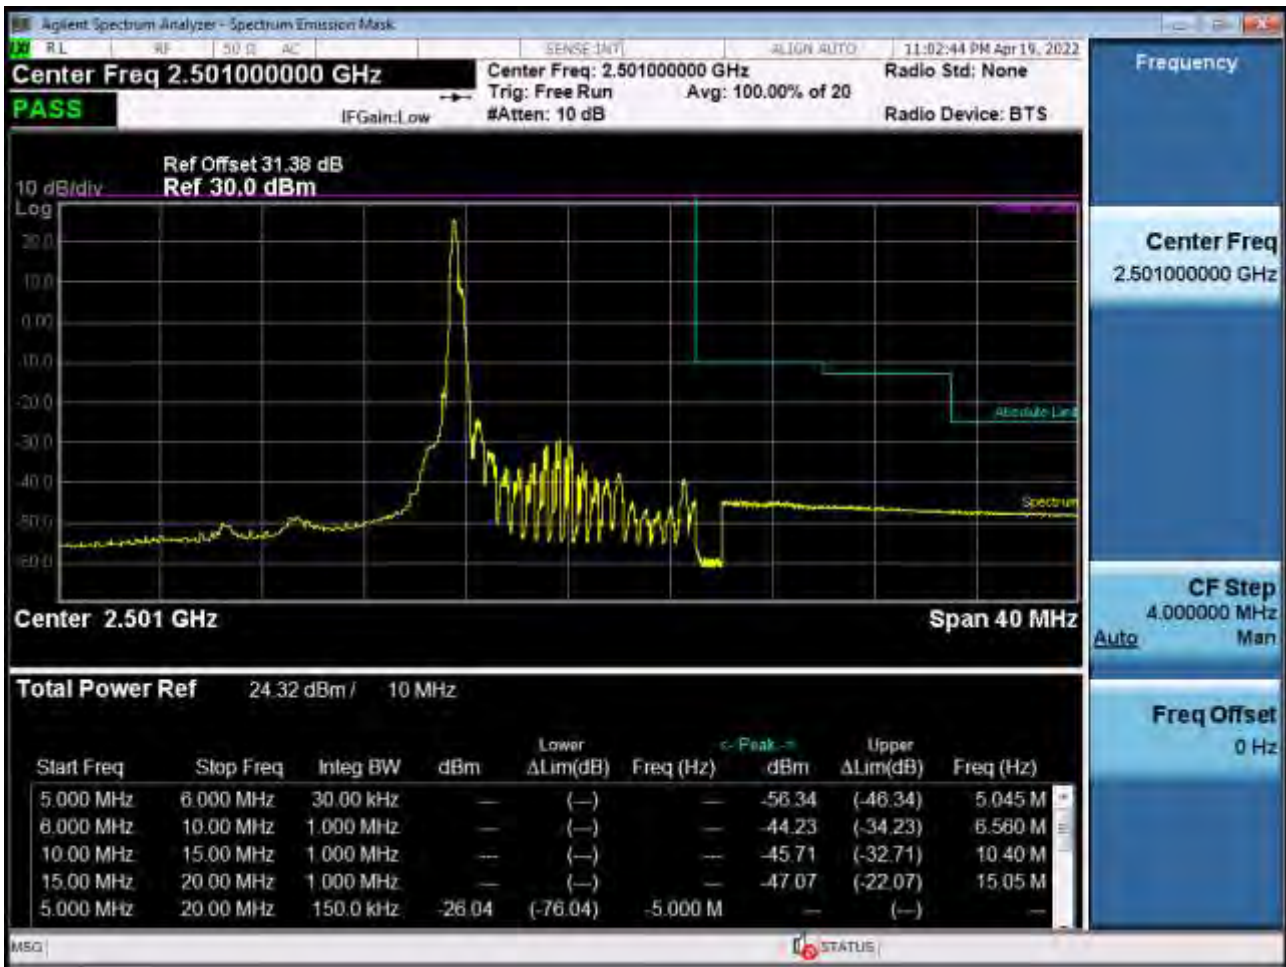

Low Channel Edge Plot (10 MHz Ch.39700 QPSK_RB50_Offset 0)-1 (POWER CLASS 3)




Low Channel Edge Plot (10 MHz Ch.39700 QPSK_RB50_Offset 0)-2 (POWER CLASS 3)



Low Channel Edge Plot (10 MHz Ch.39740 QPSK RB 1, Offset 0)-1 (POWER CLASS 3)



Low Channel Edge Plot (10 MHz Ch.39740 QPSK RB 1, Offset 0)-2 (POWER CLASS 3)

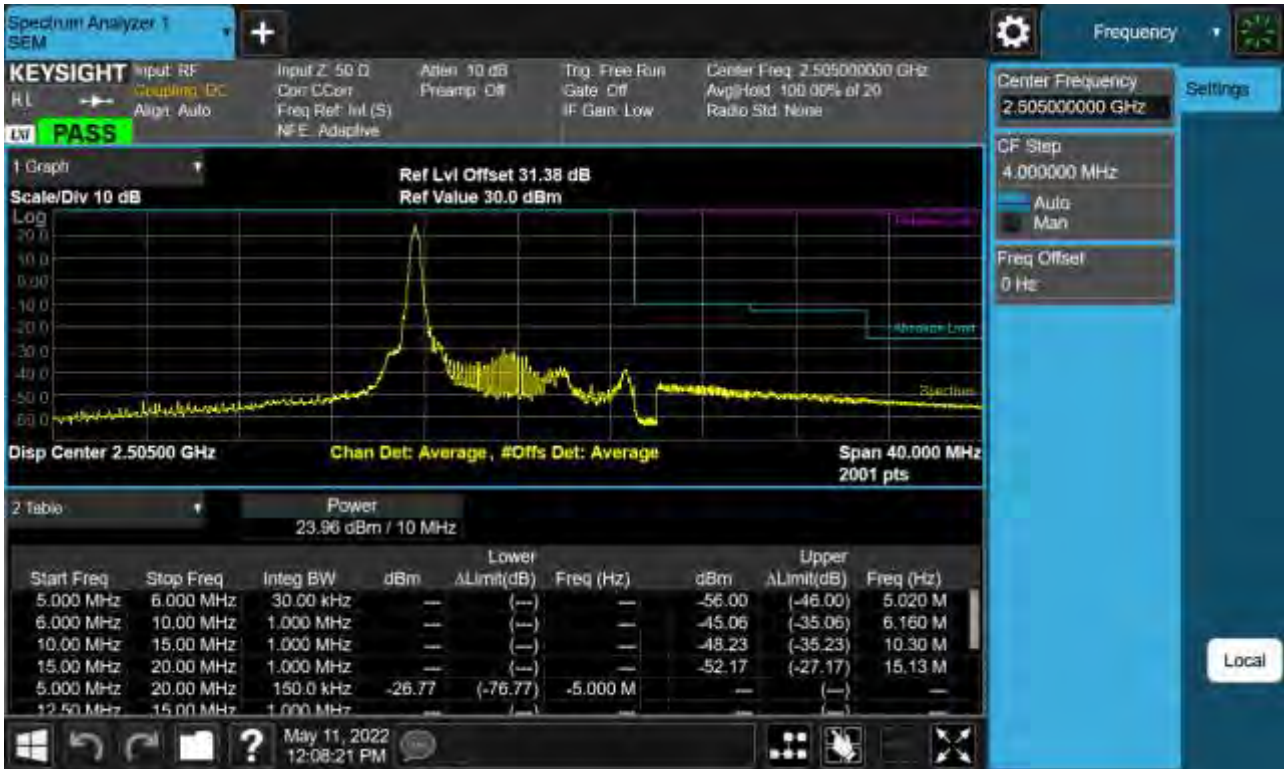

Low Channel Edge Plot (10 MHz Ch.39740 QPSK_RB50_Offset 0)-1 (POWER CLASS 3)




Low Channel Edge Plot (10 MHz Ch.39740 QPSK_RB50_Offset 0)-2 (POWER CLASS 3)



Mid Channel Edge Plot (10 MHz Ch.40620 QPSK RB 50) (POWER CLASS 3)




High Channel Edge Plot (10 MHz Ch.41540 QPSK RB 1, Offset 49) (POWER CLASS 3)

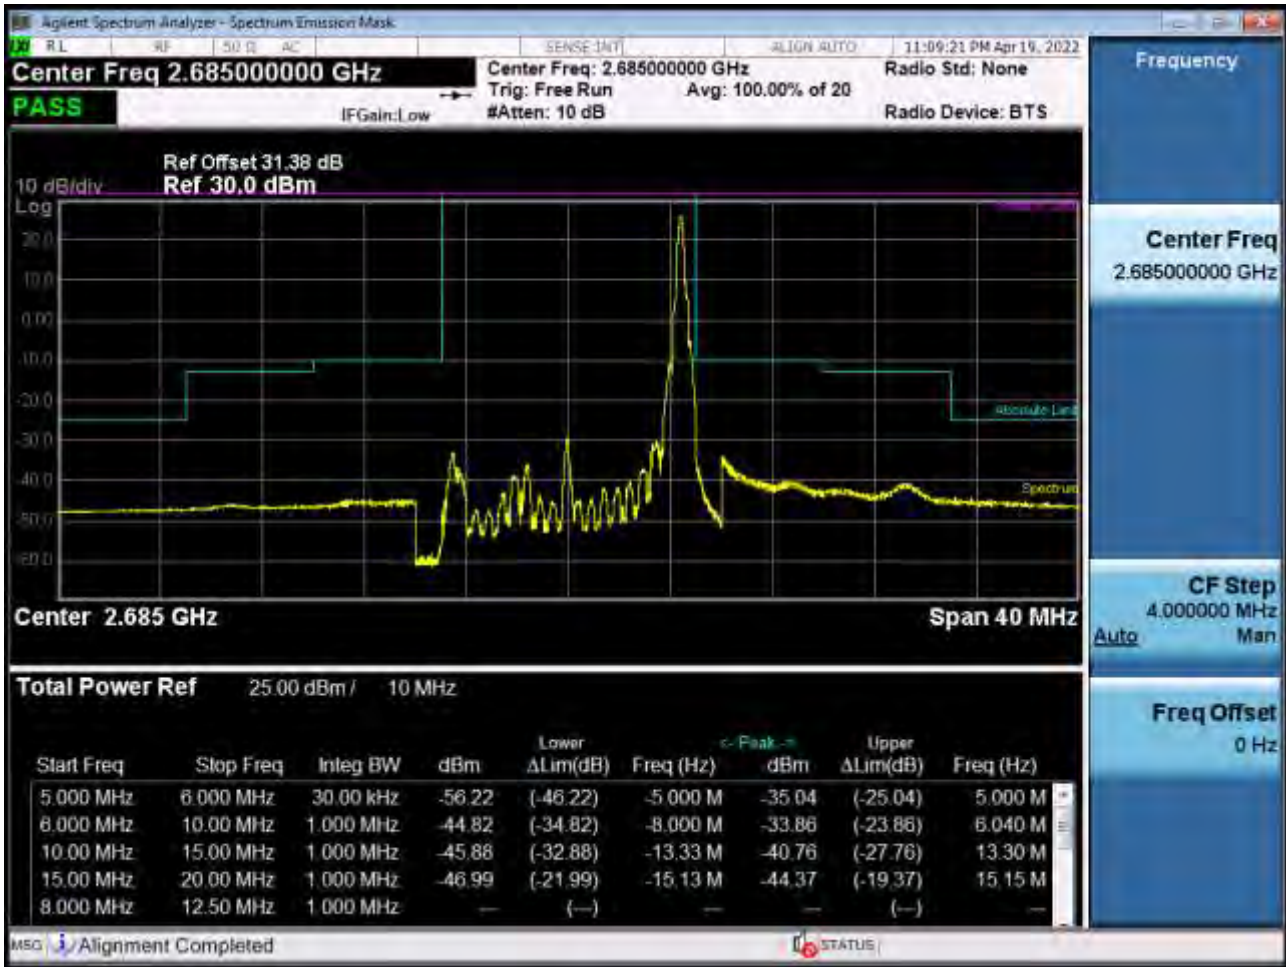


High Channel Edge Plot (10 MHz Ch.41540 QPSK_RB50_Offset 0) (POWER CLASS 3)




Low Channel Edge Plot (15 MHz Ch.39725 QPSK RB 1, Offset 0)-1 (POWER CLASS 3)

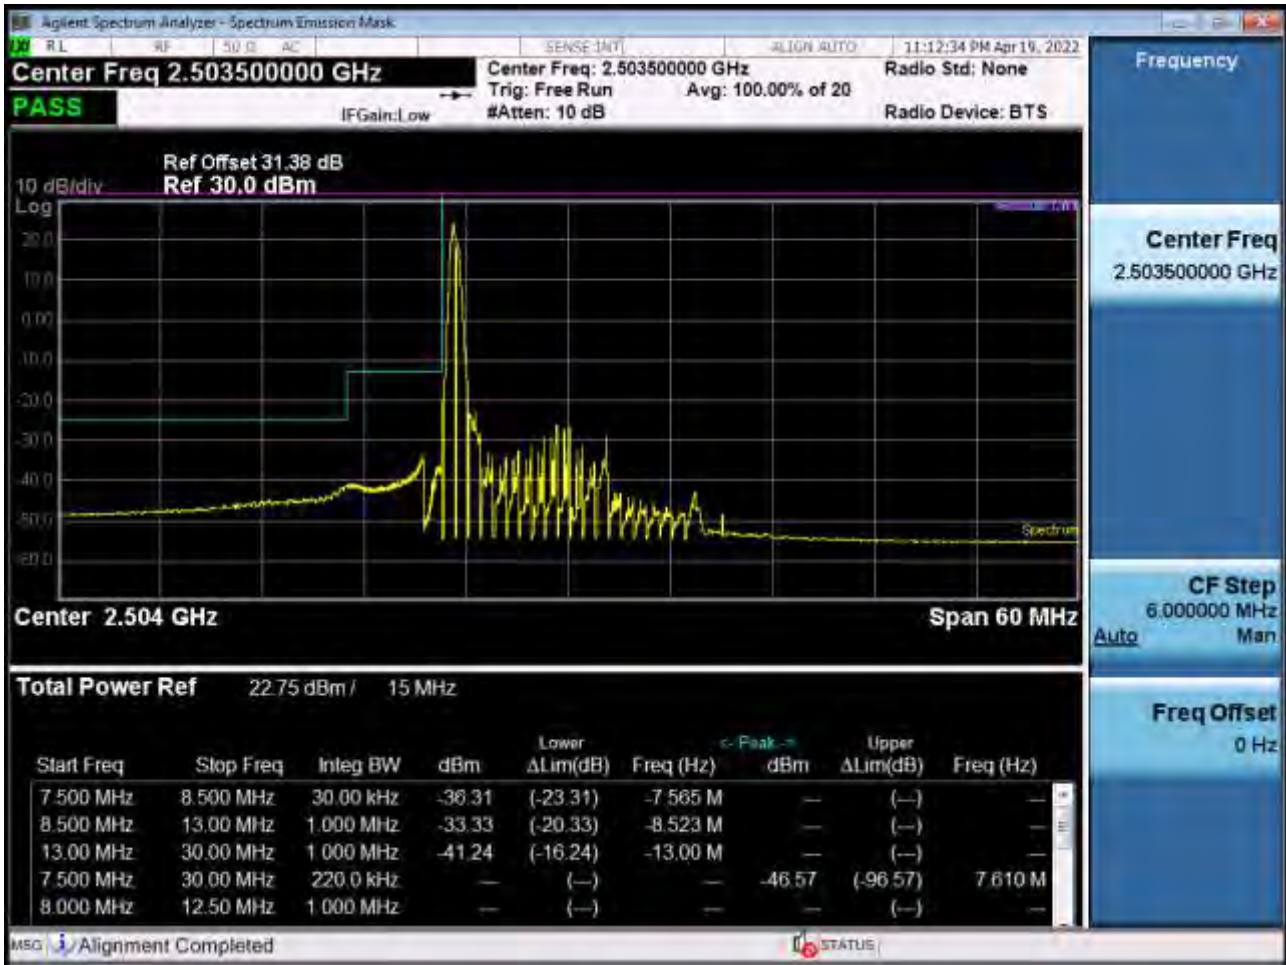

Low Channel Edge Plot (15 MHz Ch.39725 QPSK RB 1, Offset 0)-2 (POWER CLASS 3)

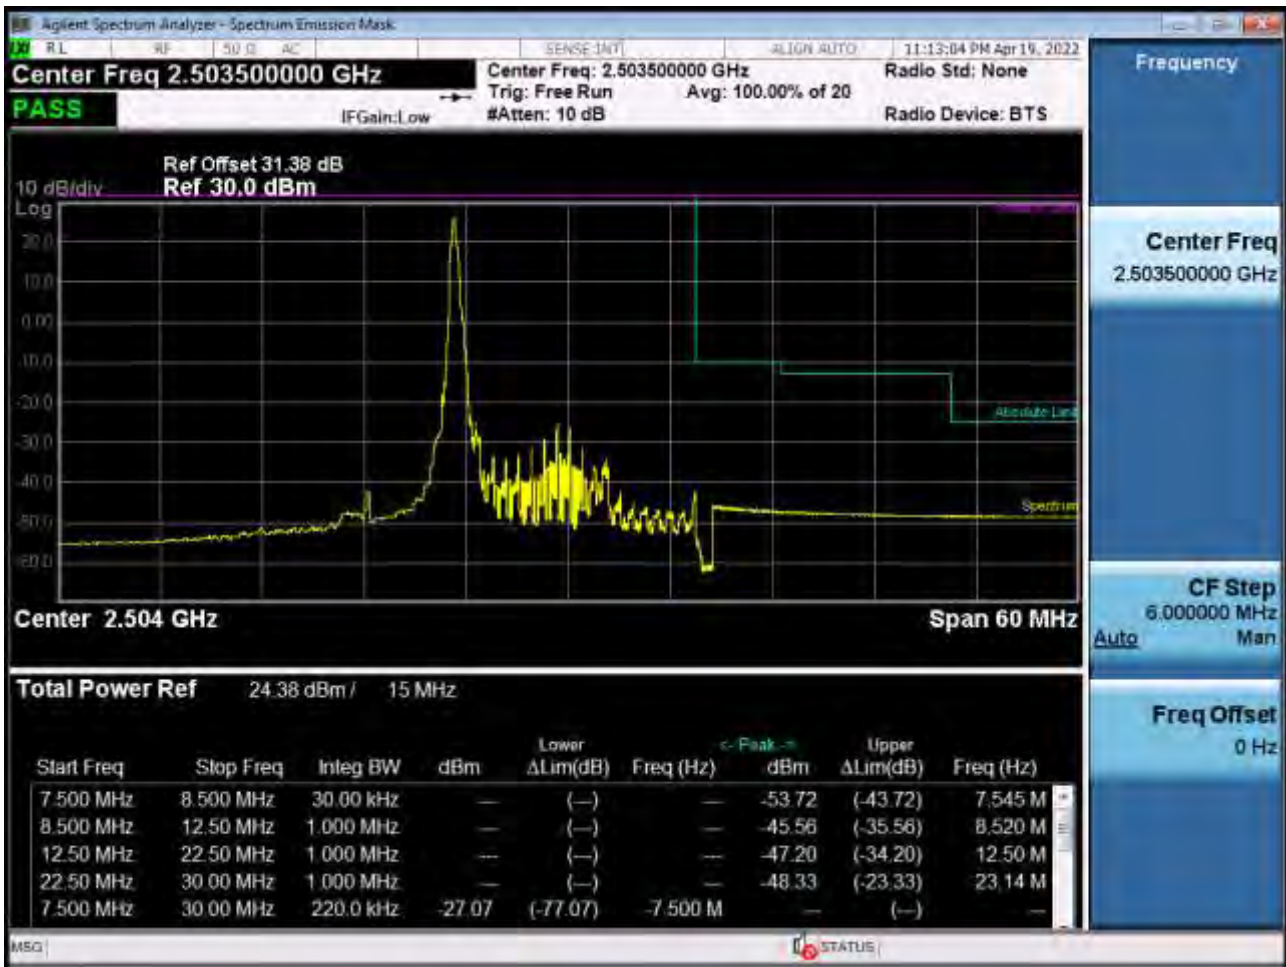

Low Channel Edge Plot (15 MHz Ch.39725 QPSK_RB75_Offset 0)-1 (POWER CLASS 3)

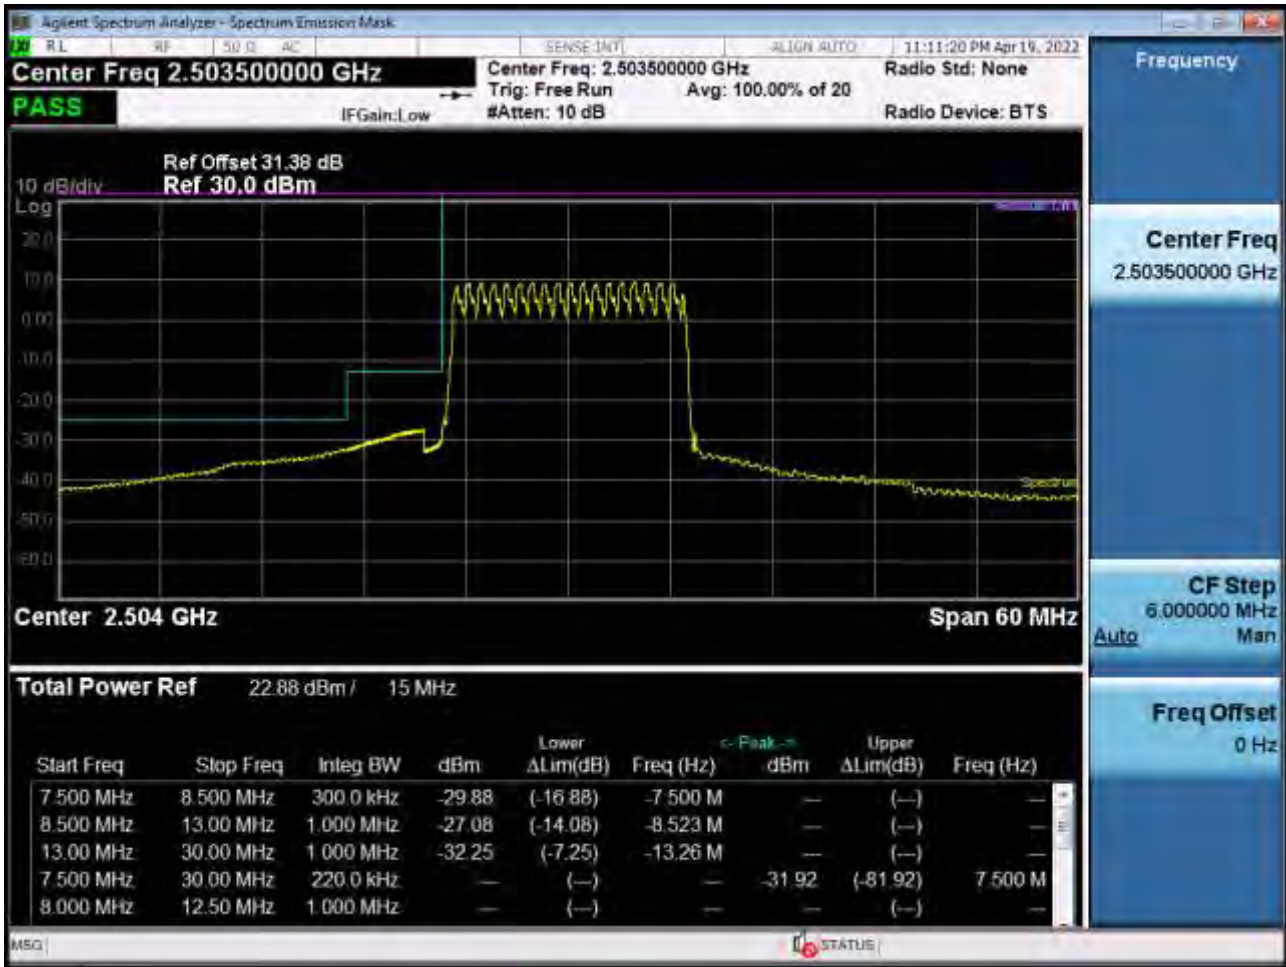


Low Channel Edge Plot (15 MHz Ch.39725 QPSK_RB75_Offset 0)-2 (POWER CLASS 3)



Low Channel Edge Plot (15 MHz Ch.39765 QPSK RB 1, Offset 0)-1 (POWER CLASS 3)



Low Channel Edge Plot (15 MHz Ch.39765 QPSK RB 1, Offset 0)-2 (POWER CLASS 3)

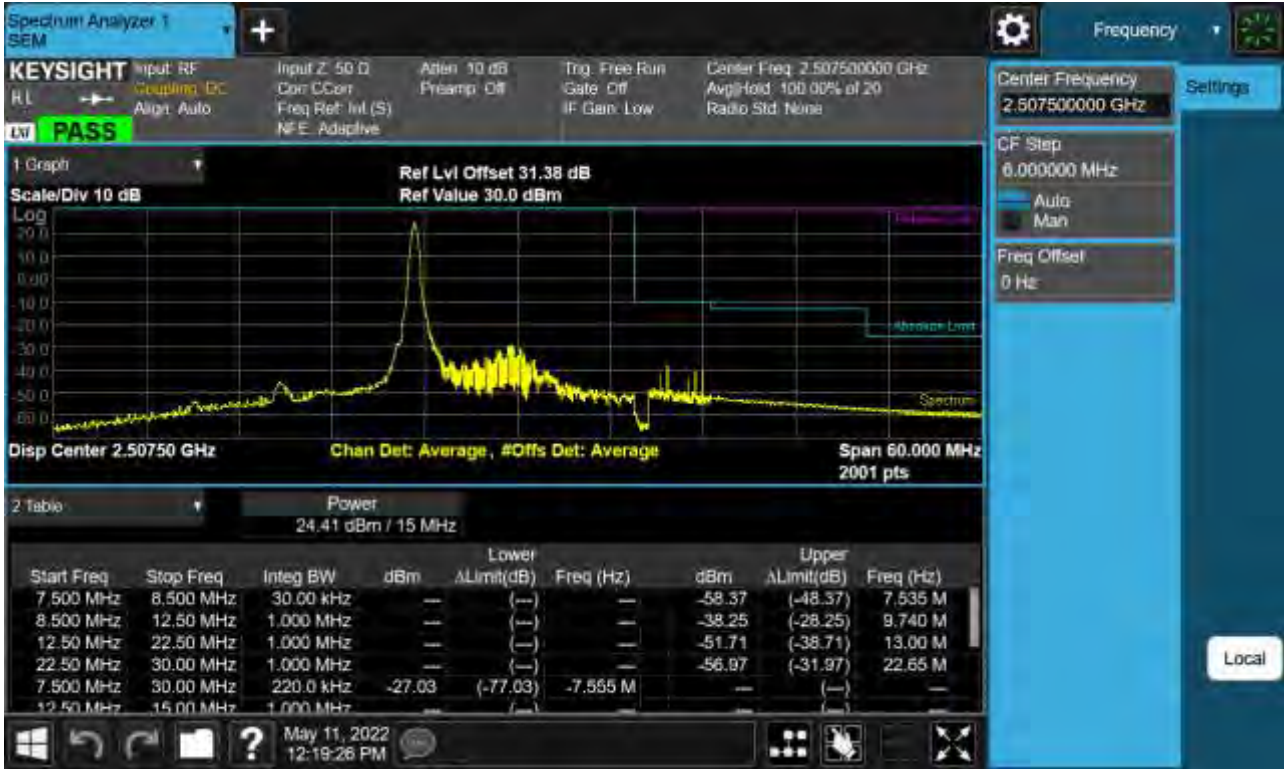


Low Channel Edge Plot (15 MHz Ch.39765 QPSK_RB75_Offset 0)-1 (POWER CLASS 3)




Low Channel Edge Plot (15 MHz Ch.39765 QPSK_RB75_Offset 0)-2 (POWER CLASS 3)



Mid Channel Edge Plot (15 MHz Ch.40620 QPSK RB 75) (POWER CLASS 3)

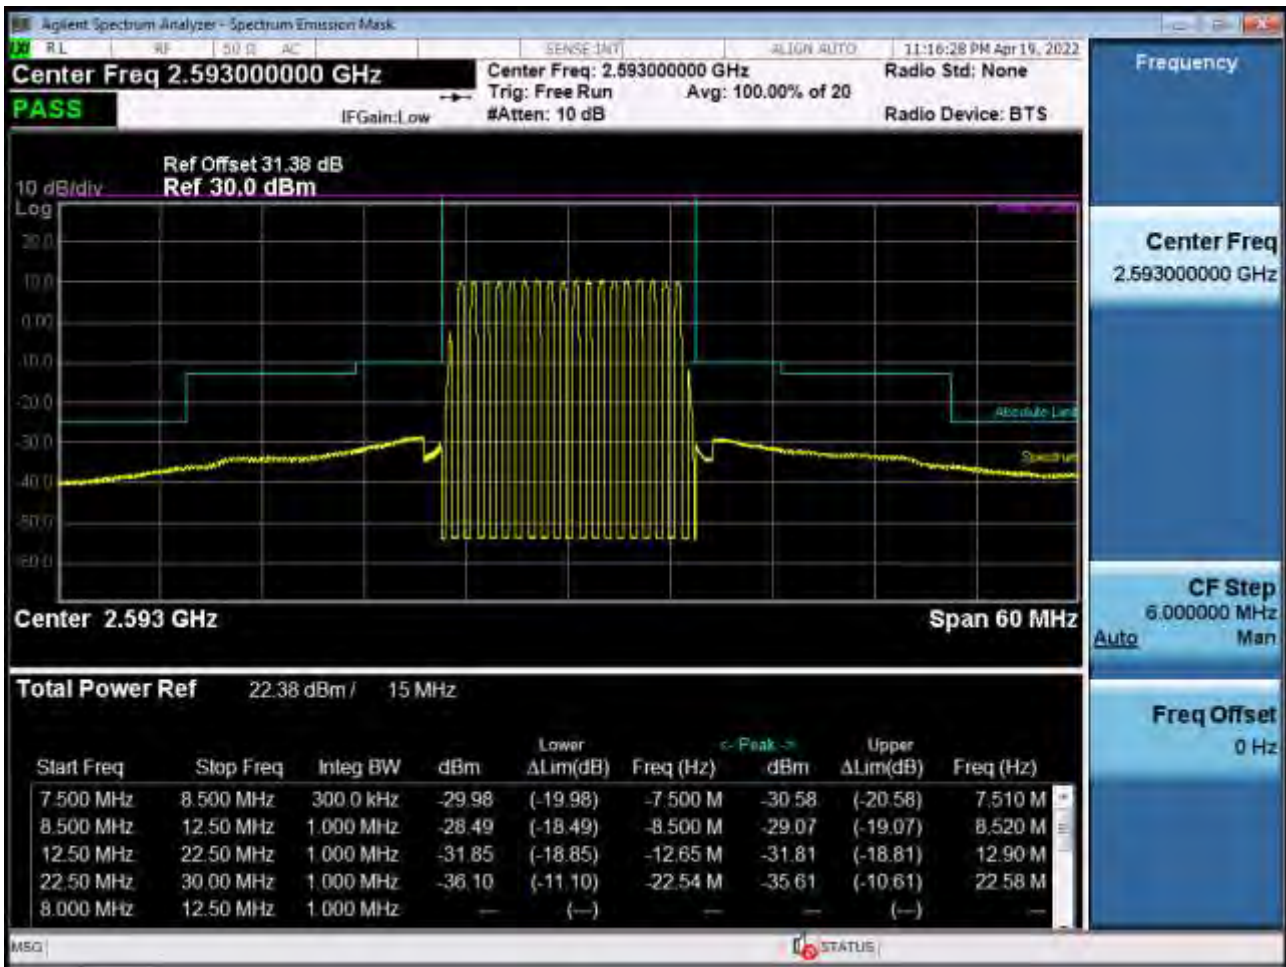


High Channel Edge Plot (15 MHz Ch.41515 QPSK RB 1, Offset 74) (POWER CLASS 3)

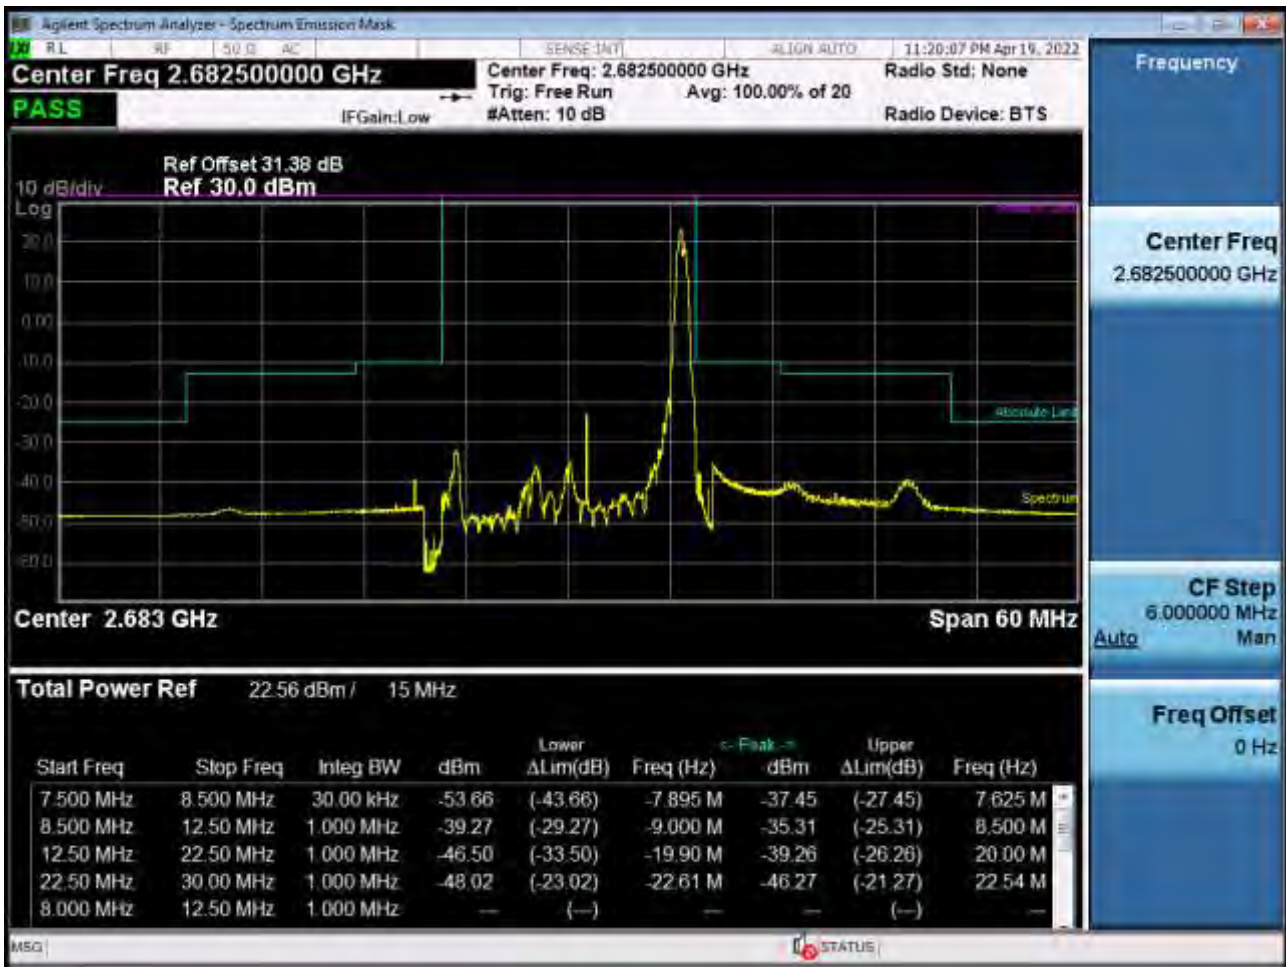


High Channel Edge Plot (15 MHz Ch.41515 QPSK_RB75_Offset 0) (POWER CLASS 3)



Low Channel Edge Plot (20 MHz Ch.39750 QPSK RB 1, Offset 0)-1 (POWER CLASS 3)

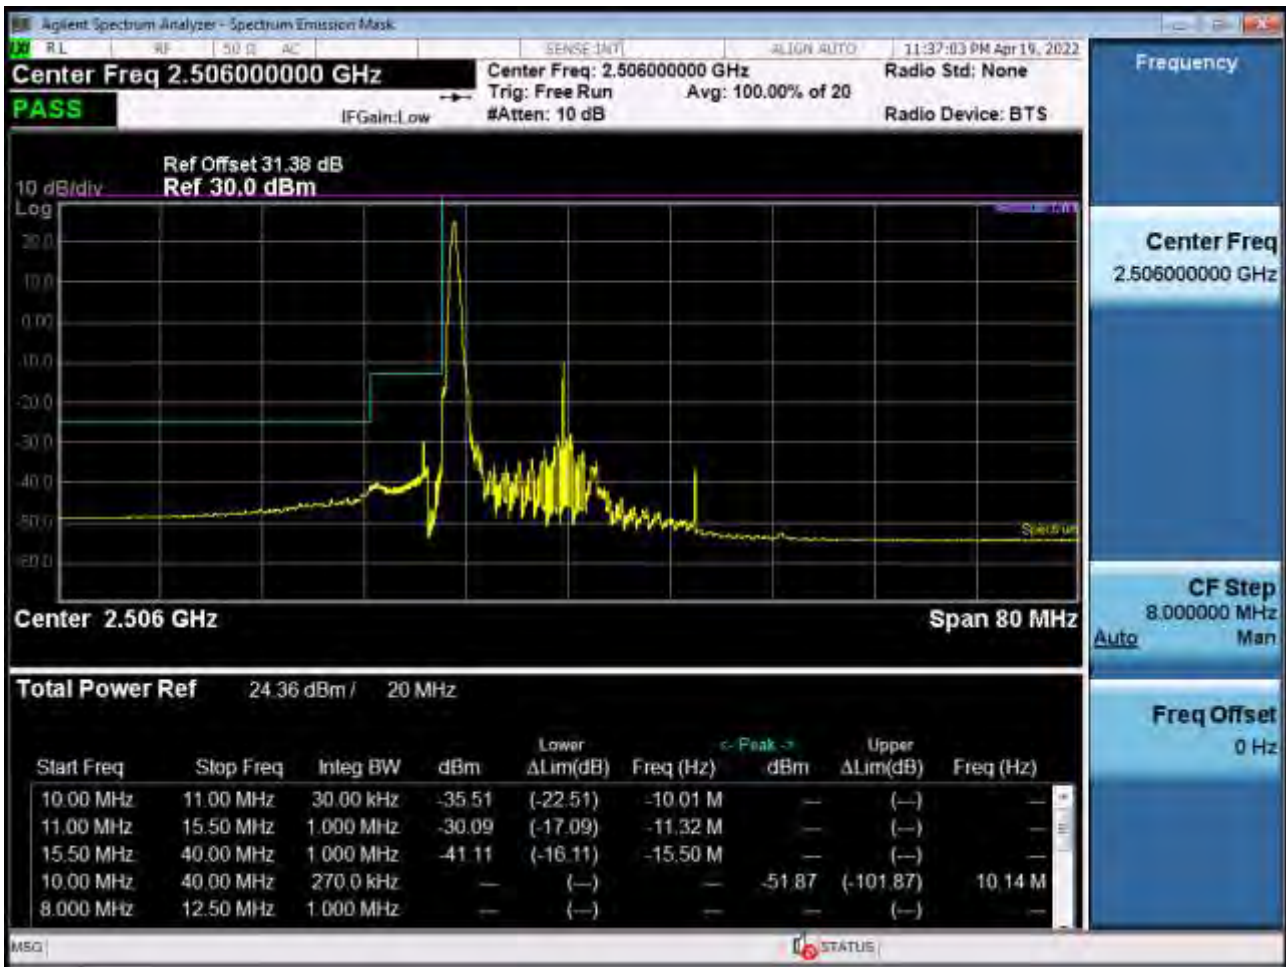

Low Channel Edge Plot (20 MHz Ch.39750 QPSK RB 1, Offset 0)-2 (POWER CLASS 3)

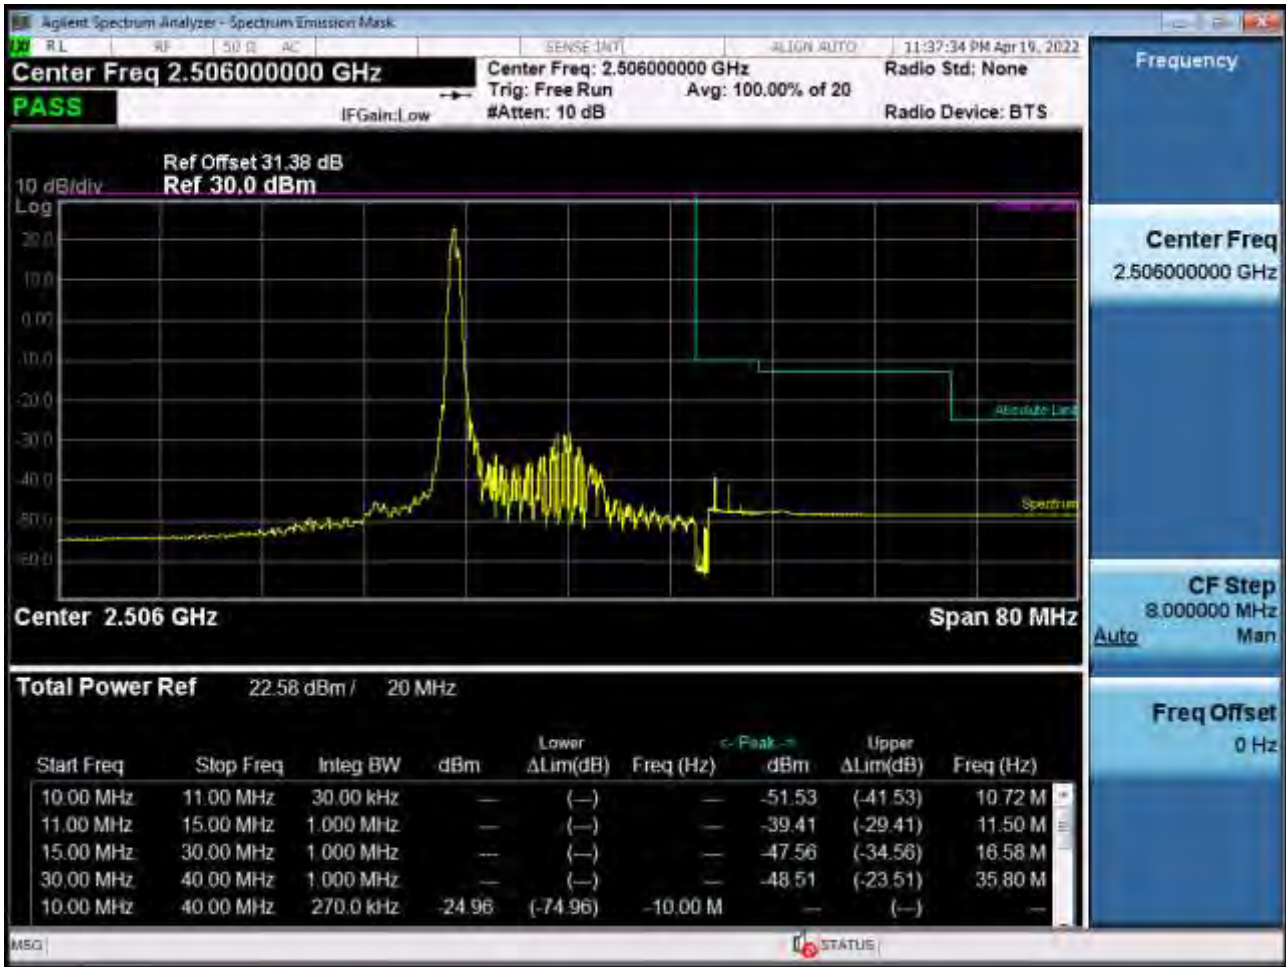


Low Channel Edge Plot (20 MHz Ch.39750 QPSK_RB100_Offset 0)-1 (POWER CLASS 3)




Low Channel Edge Plot (20 MHz Ch.39750 QPSK_RB100_Offset 0)-2 (POWER CLASS 3)



Low Channel Edge Plot (20 MHz Ch.39790 QPSK RB 1, Offset 0)-1 (POWER CLASS 3)

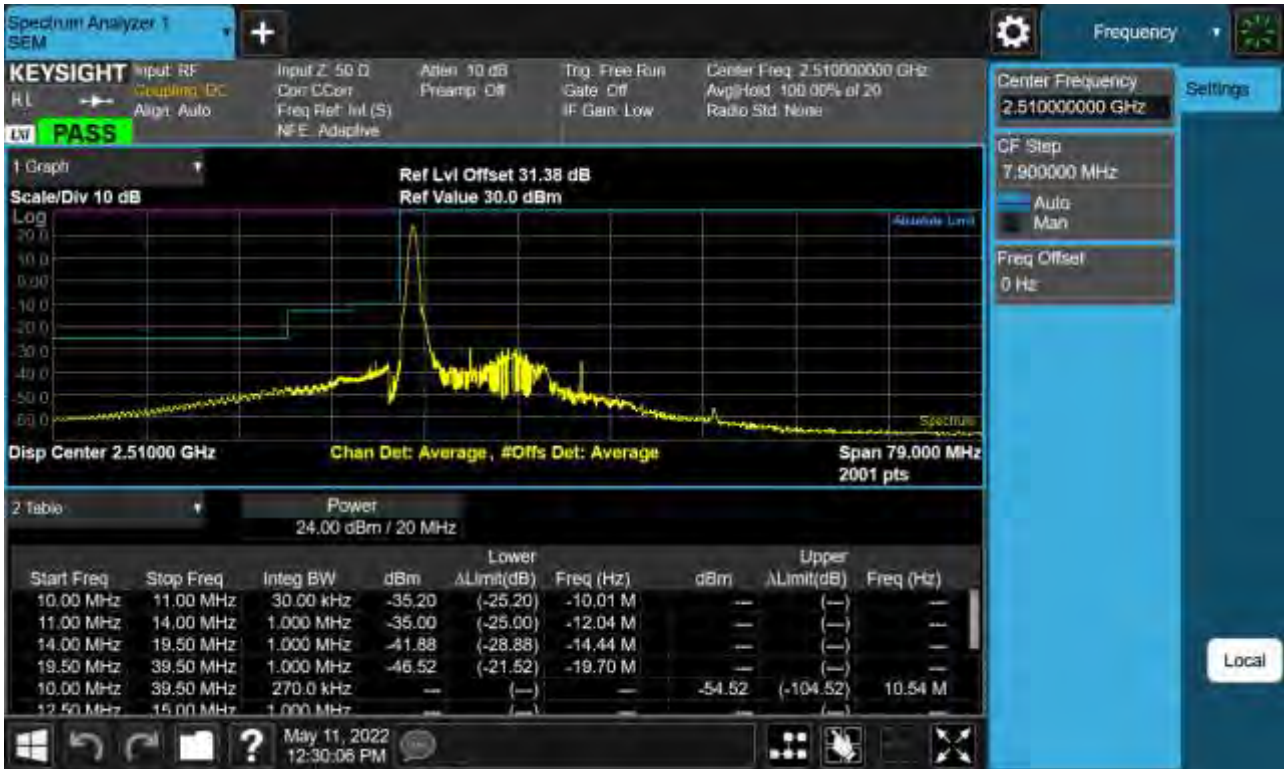

Low Channel Edge Plot (20 MHz Ch.39790 QPSK RB 1, Offset 0)-2 (POWER CLASS 3)

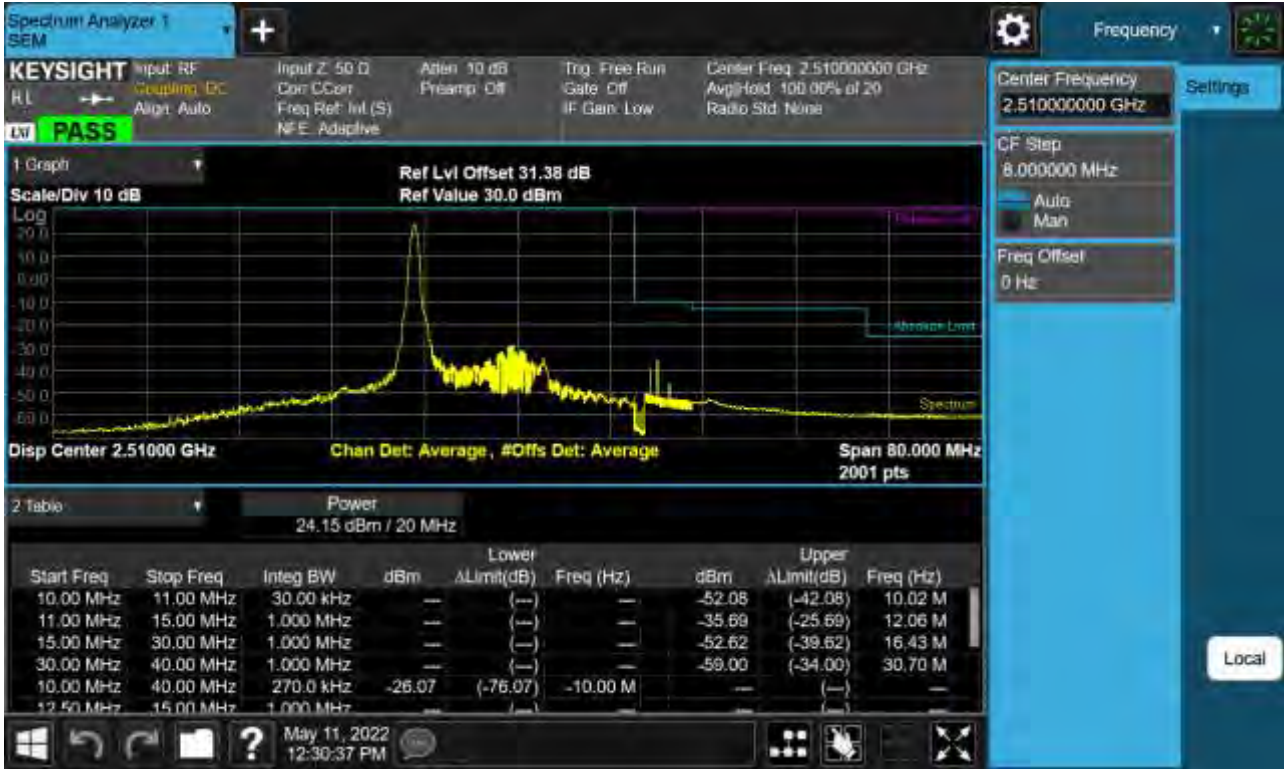

Low Channel Edge Plot (20 MHz Ch.39790 QPSK_RB100_Offset 0)-1 (POWER CLASS 3)




Low Channel Edge Plot (20 MHz Ch.39790 QPSK_RB100_Offset 0)-2 (POWER CLASS 3)




Mid Channel Edge Plot (20 MHz Ch.40620 QPSK RB 100) (POWER CLASS 3)



High Channel Edge Plot (20 MHz Ch.41490 QPSK RB 1, Offset 99) (POWER CLASS 3)

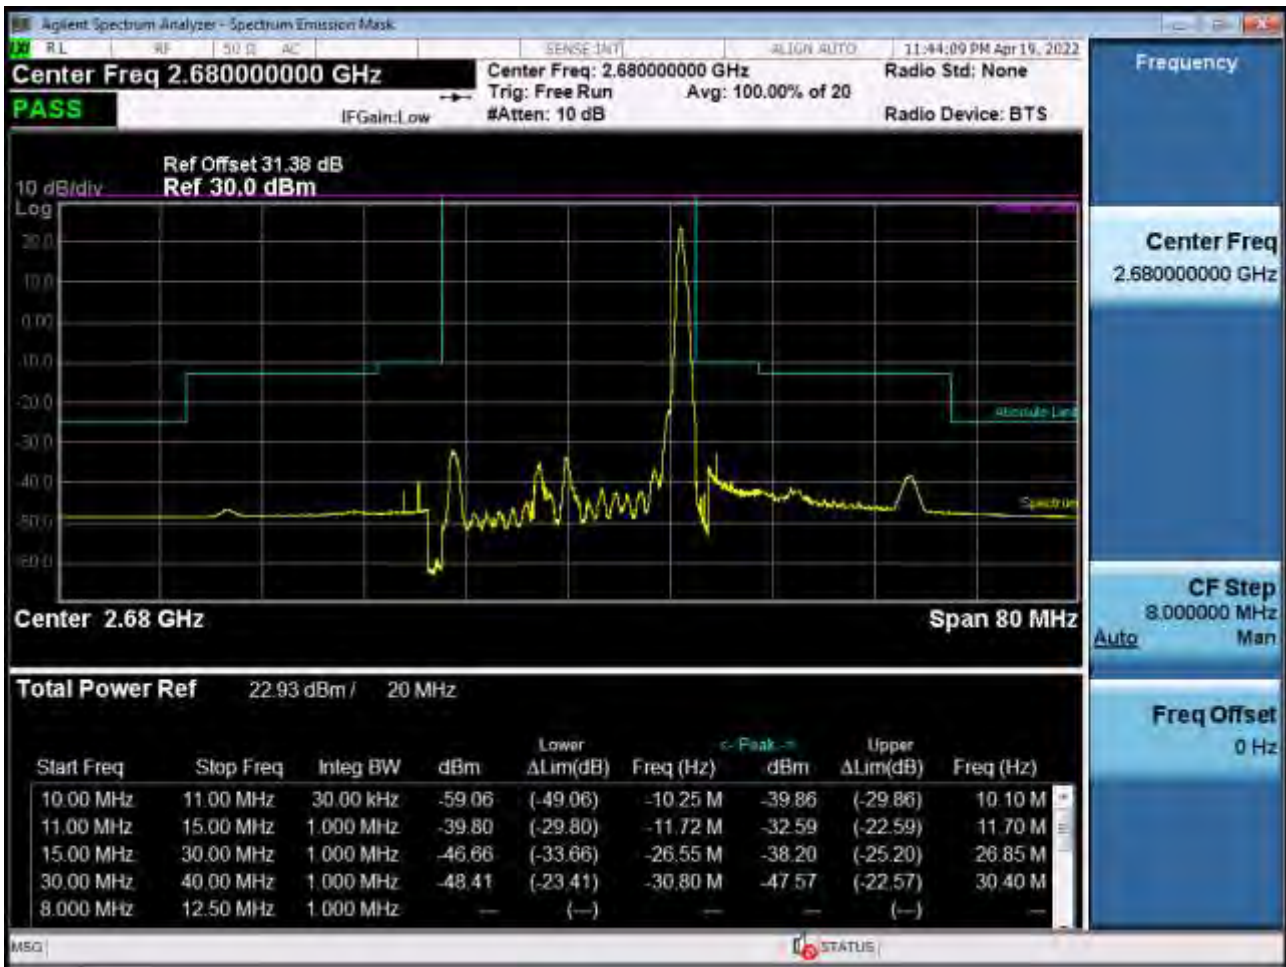


High Channel Edge Plot (20 MHz Ch.41490 QPSK_RB100_Offset 0) (POWER CLASS 3)

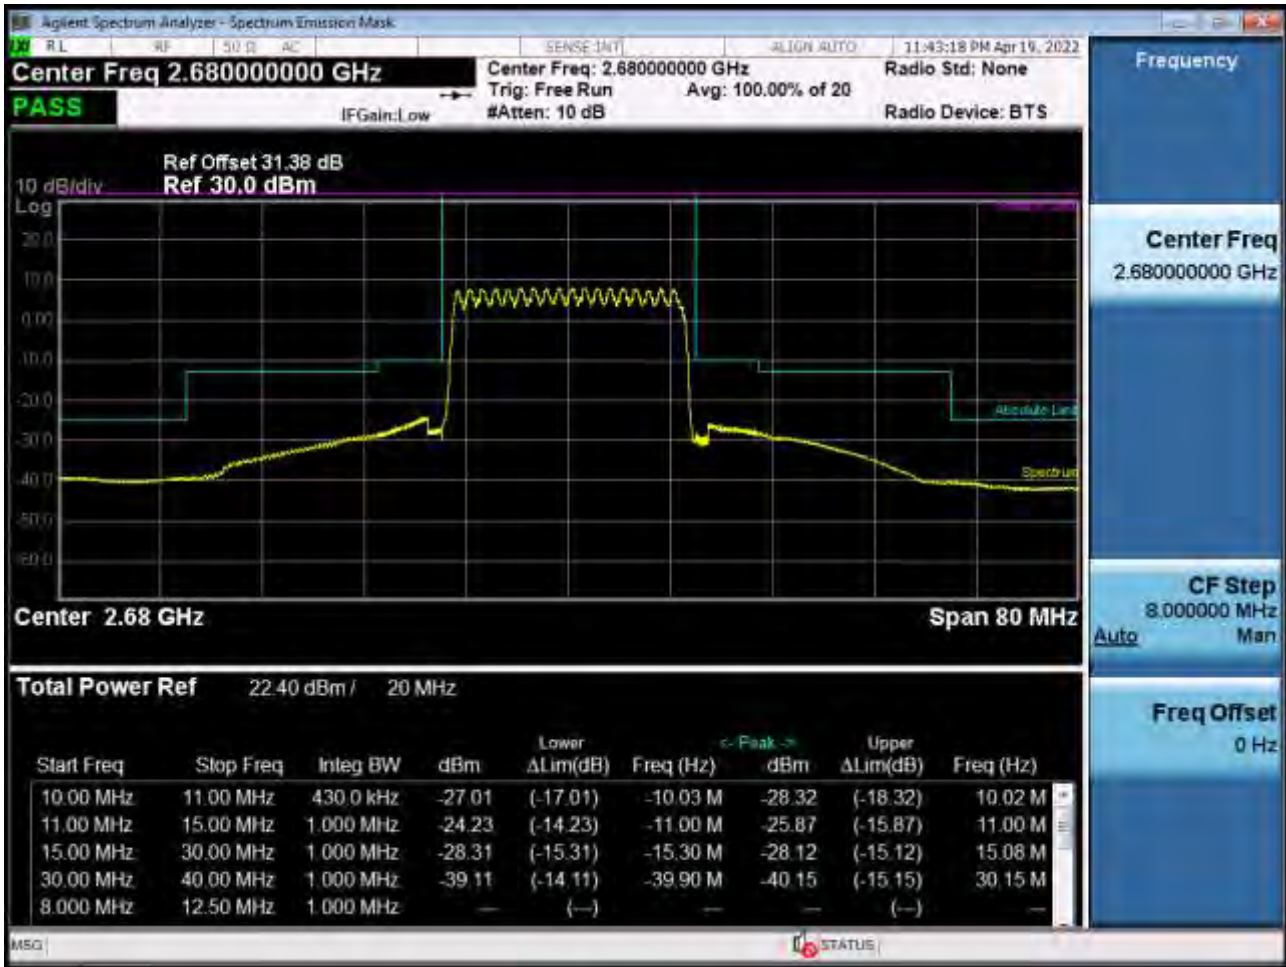


Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 1, Offset 0)-1 (POWER CLASS 2)



Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 1, Offset 0)-2 (POWER CLASS 2)

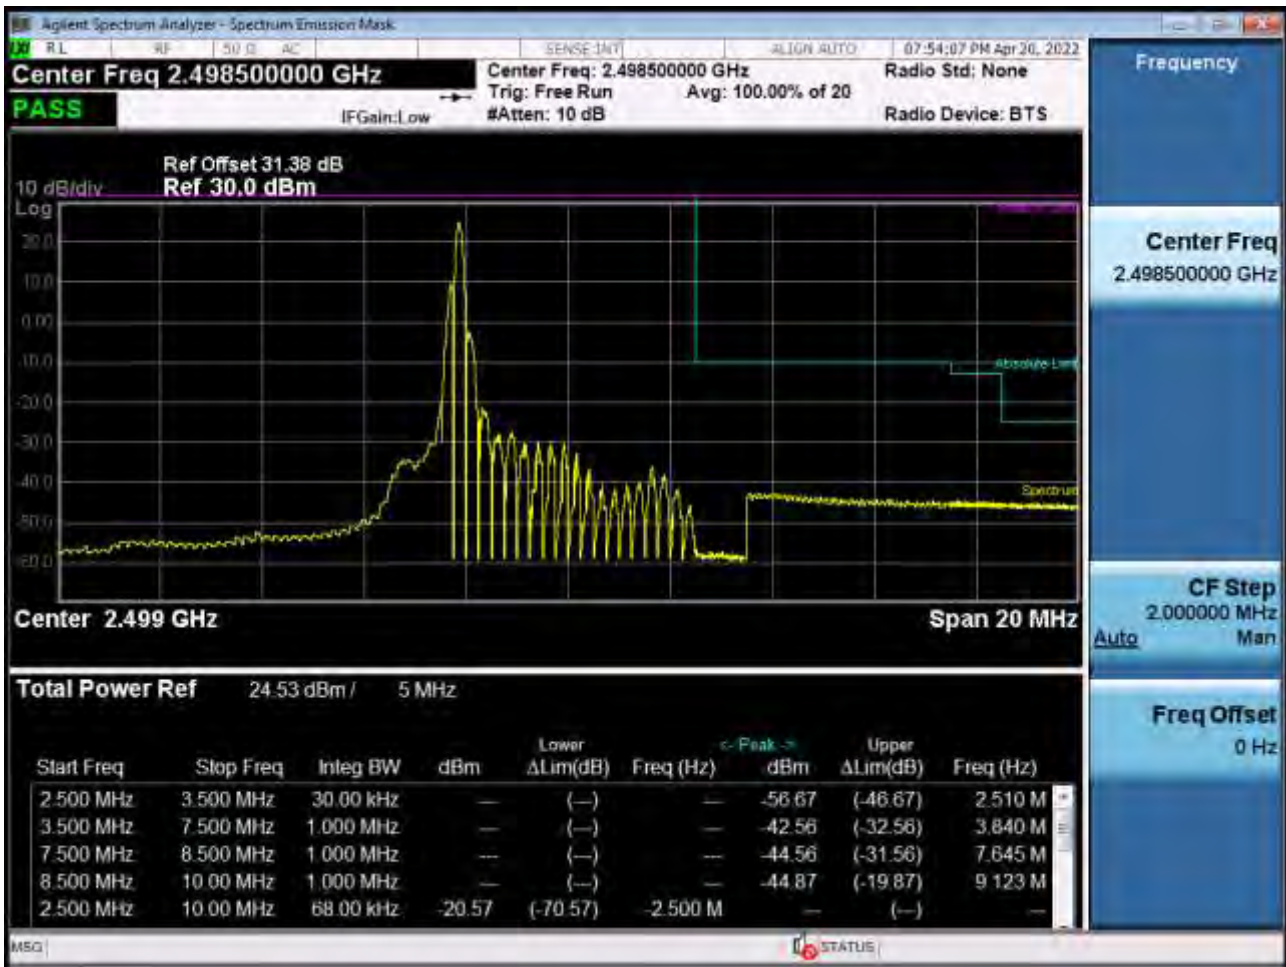

Low Channel Edge Plot (5 MHz Ch.39675 QPSK_RB25_Offset 0)-1 (POWER CLASS 2)

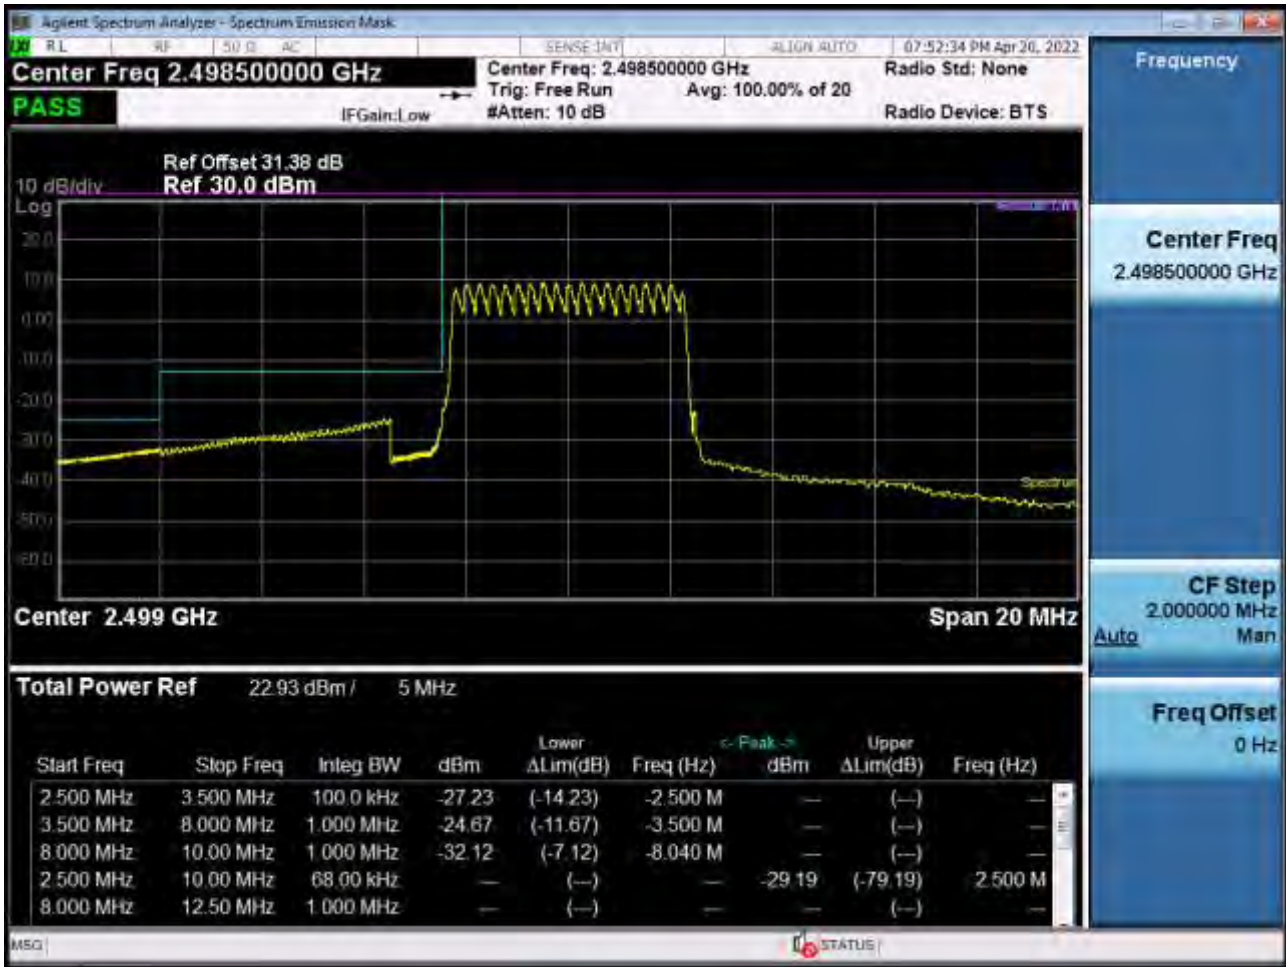


Low Channel Edge Plot (5 MHz Ch.39675 QPSK_RB25_Offset 0)-2 (POWER CLASS 2)



Mid Channel Edge Plot (5 MHz Ch.40620 QPSK RB 25) (POWER CLASS 2)




High Channel Edge Plot (5 MHz Ch.41565 QPSK RB 1, Offset 24) (POWER CLASS 2)

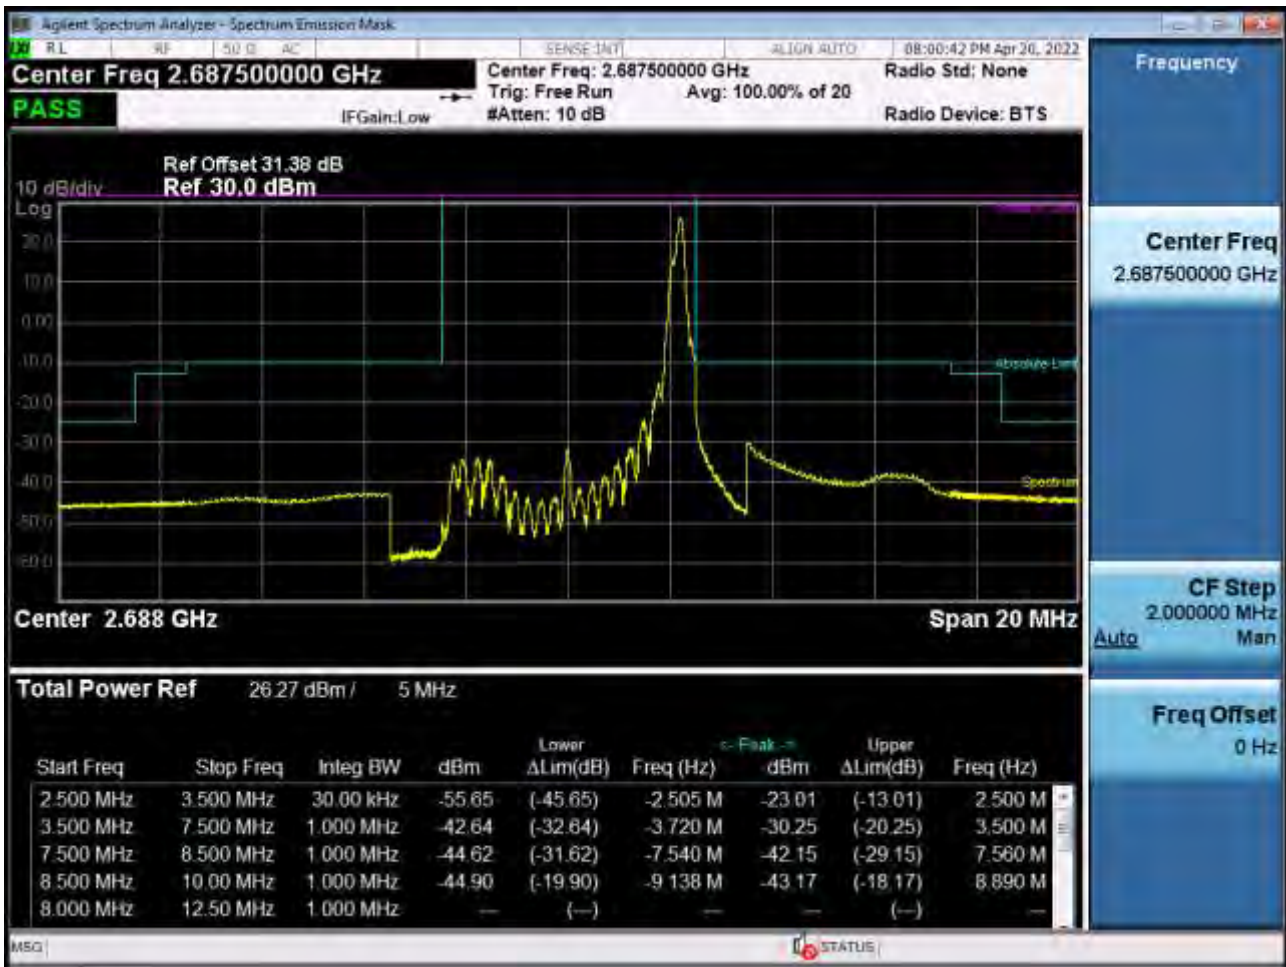


High Channel Edge Plot (5 MHz Ch.41565 QPSK_RB25_Offset 0) (POWER CLASS 2)




Low Channel Edge Plot (10 MHz Ch.39700 QPSK RB 1, Offset 0)-1 (POWER CLASS 2)

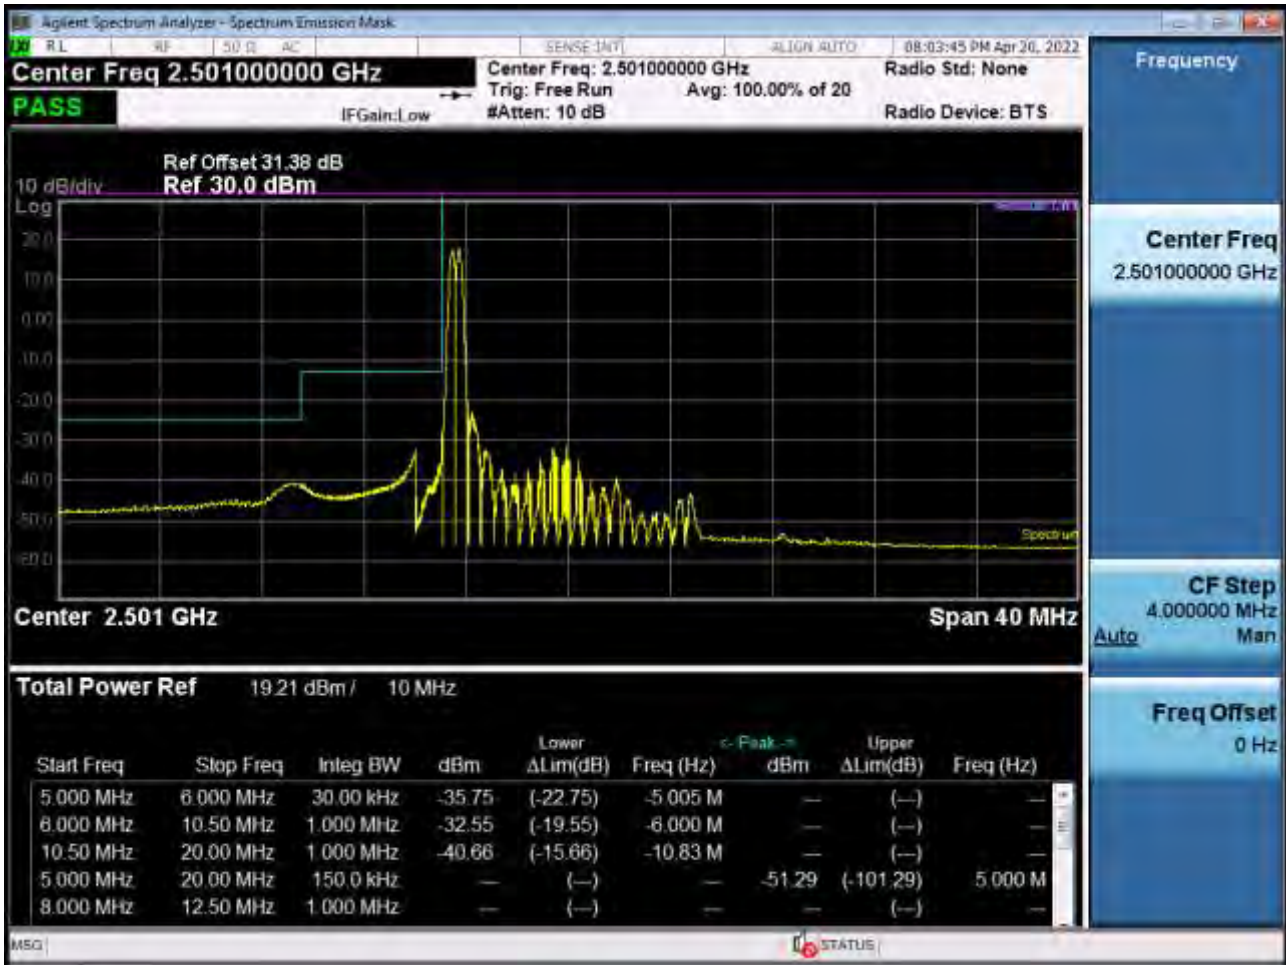

Low Channel Edge Plot (10 MHz Ch.39700 QPSK RB 1, Offset 0)-2 (POWER CLASS 2)

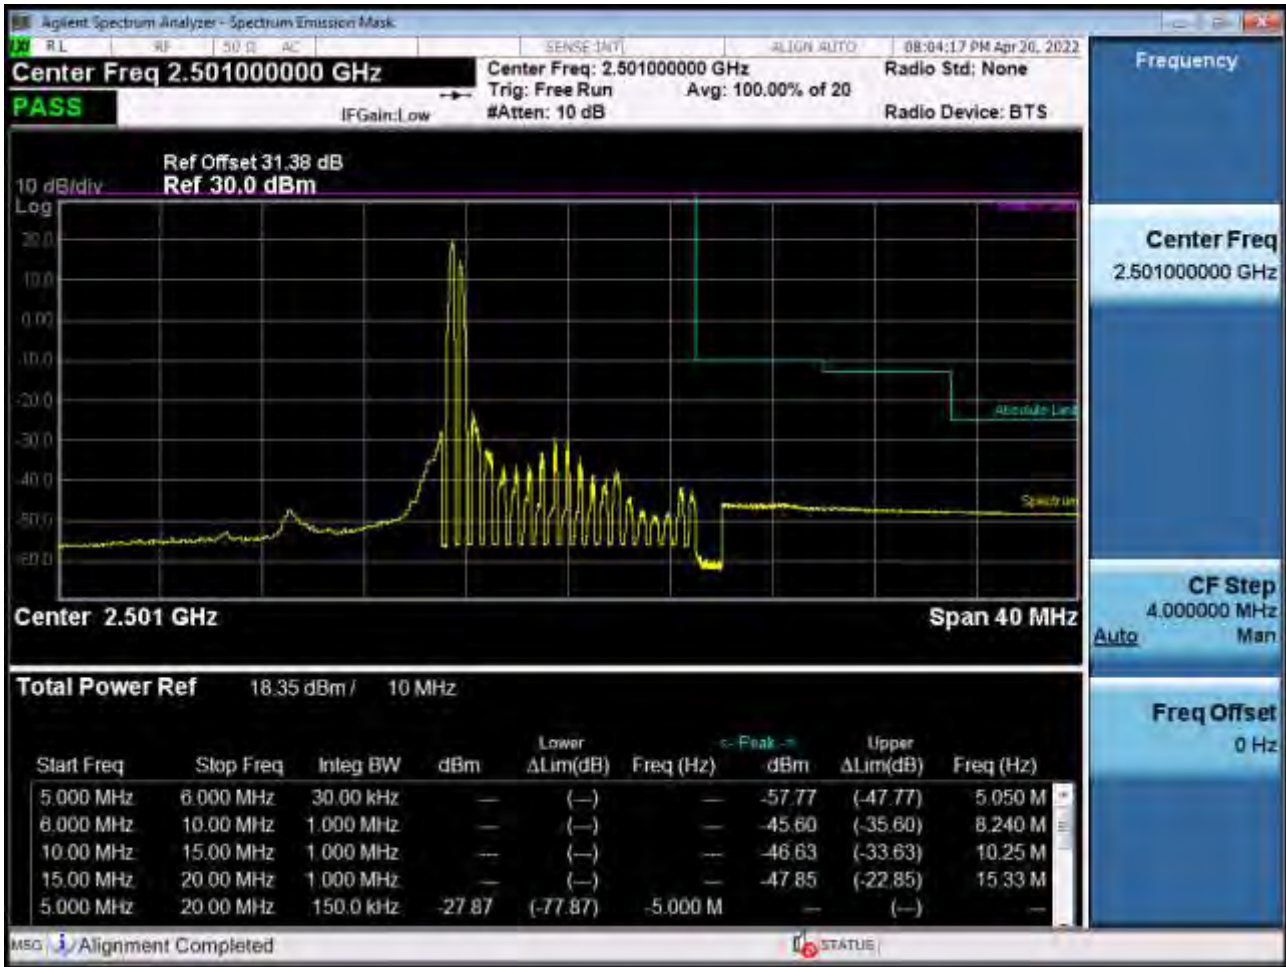

Low Channel Edge Plot (10 MHz Ch.39700 QPSK_RB50_Offset 0)-1 (POWER CLASS 2)

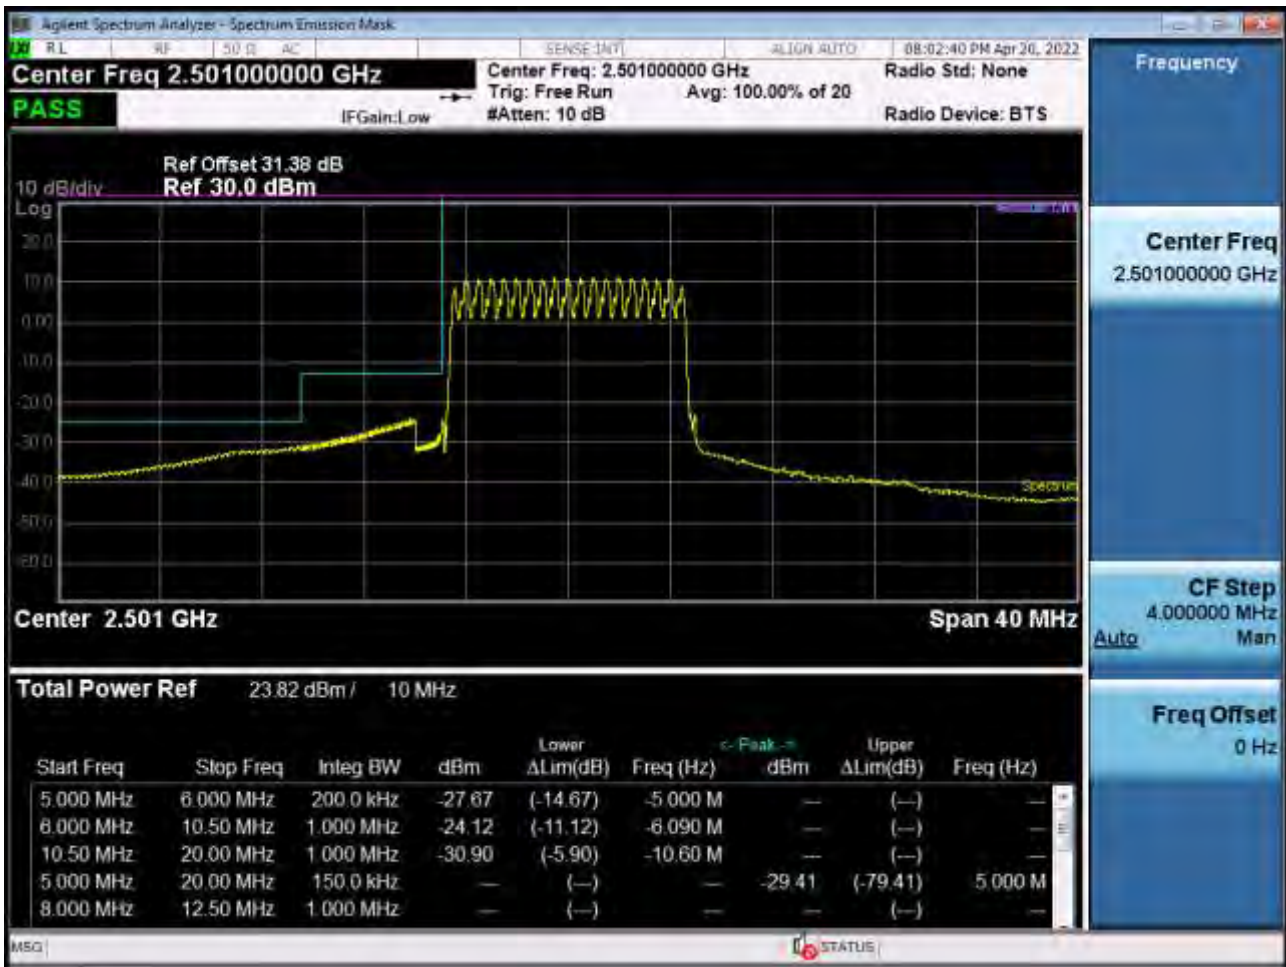


Low Channel Edge Plot (10 MHz Ch.39700 QPSK_RB50_Offset 0)-2 (POWER CLASS 2)



Mid Channel Edge Plot (10 MHz Ch.40620 QPSK RB 50) (POWER CLASS 2)




High Channel Edge Plot (10 MHz Ch.41540 QPSK RB 1, Offset 24) (POWER CLASS 2)

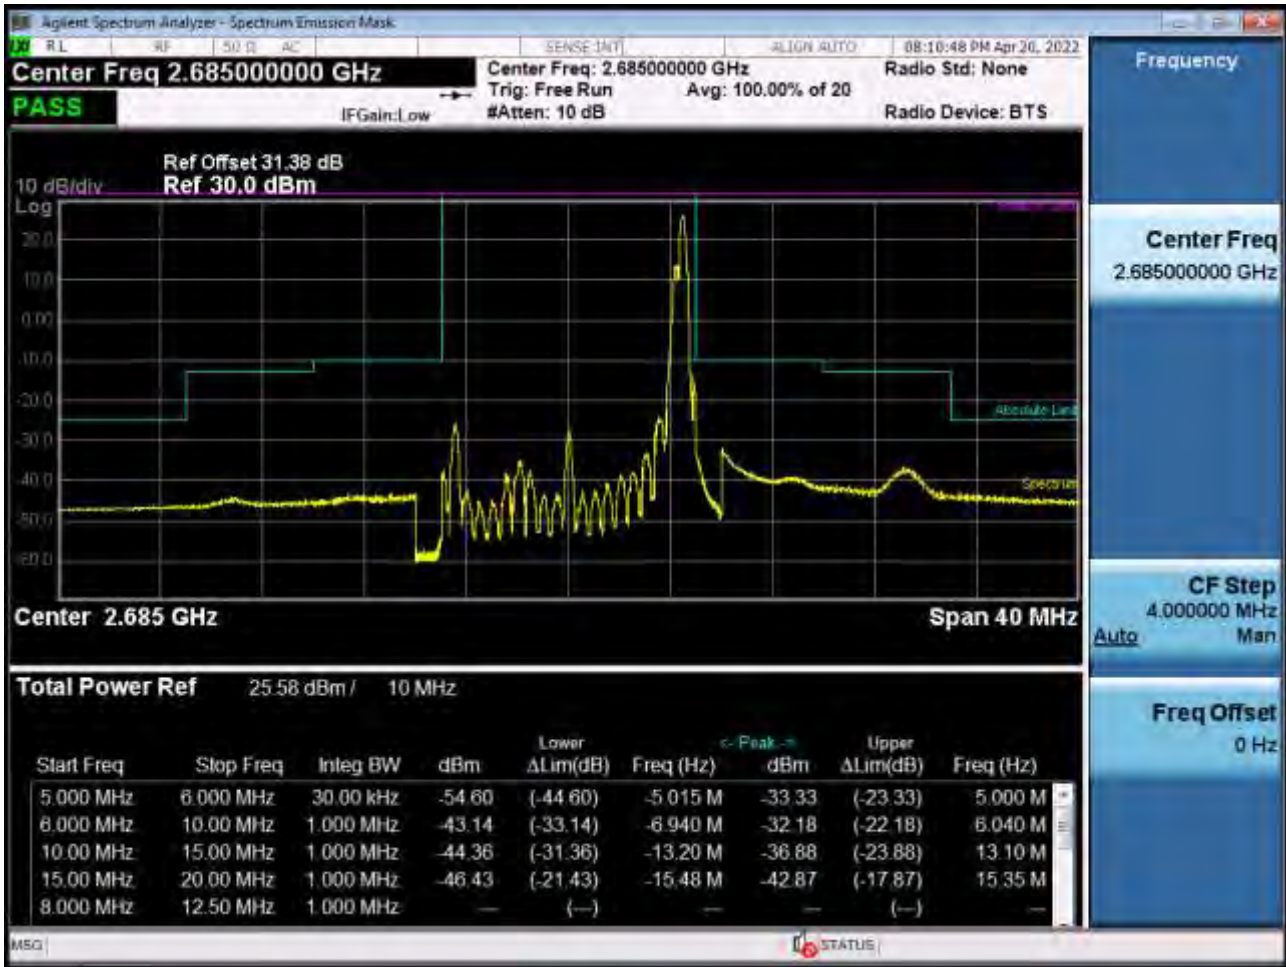


High Channel Edge Plot (10 MHz Ch.41540 QPSK_RB50_Offset 0) (POWER CLASS 2)




Low Channel Edge Plot (15 MHz Ch.39725 QPSK RB 1, Offset 0)-1 (POWER CLASS 2)

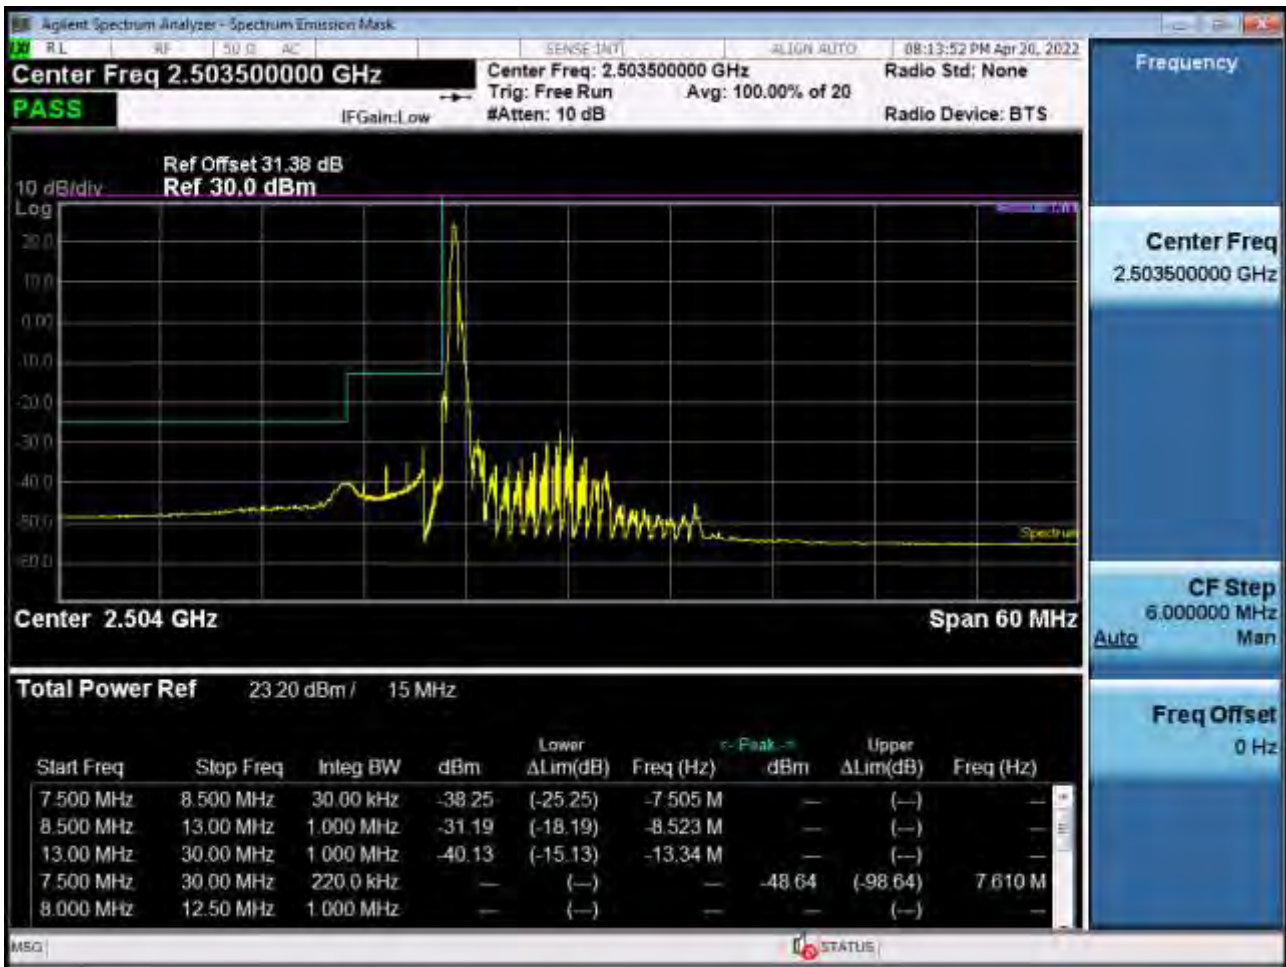

Low Channel Edge Plot (15 MHz Ch.39725 QPSK RB 1, Offset 0)-2 (POWER CLASS 2)

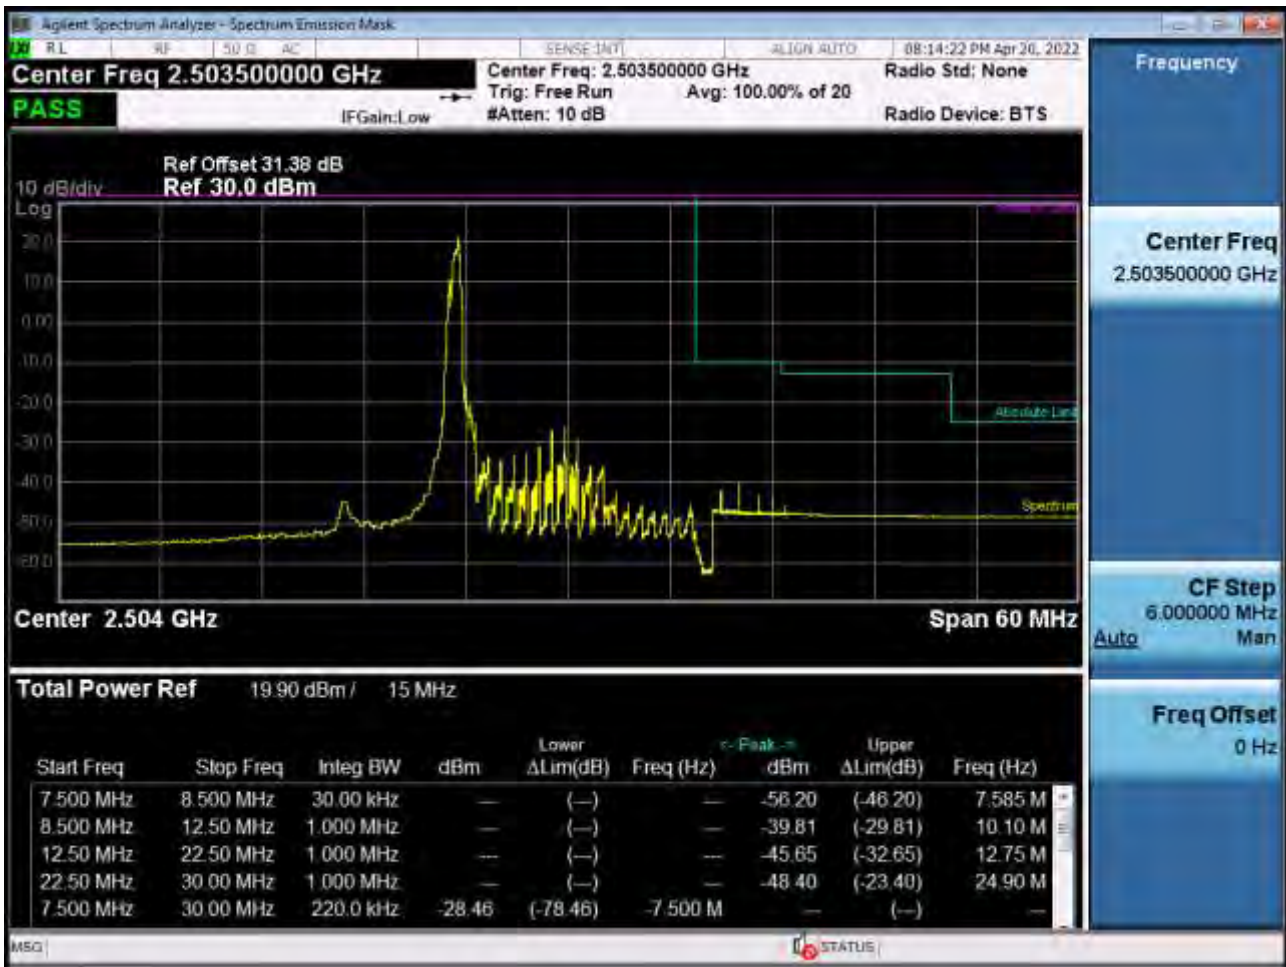

Low Channel Edge Plot (15 MHz Ch.39725 QPSK_RB75_Offset 0)-1 (POWER CLASS 2)

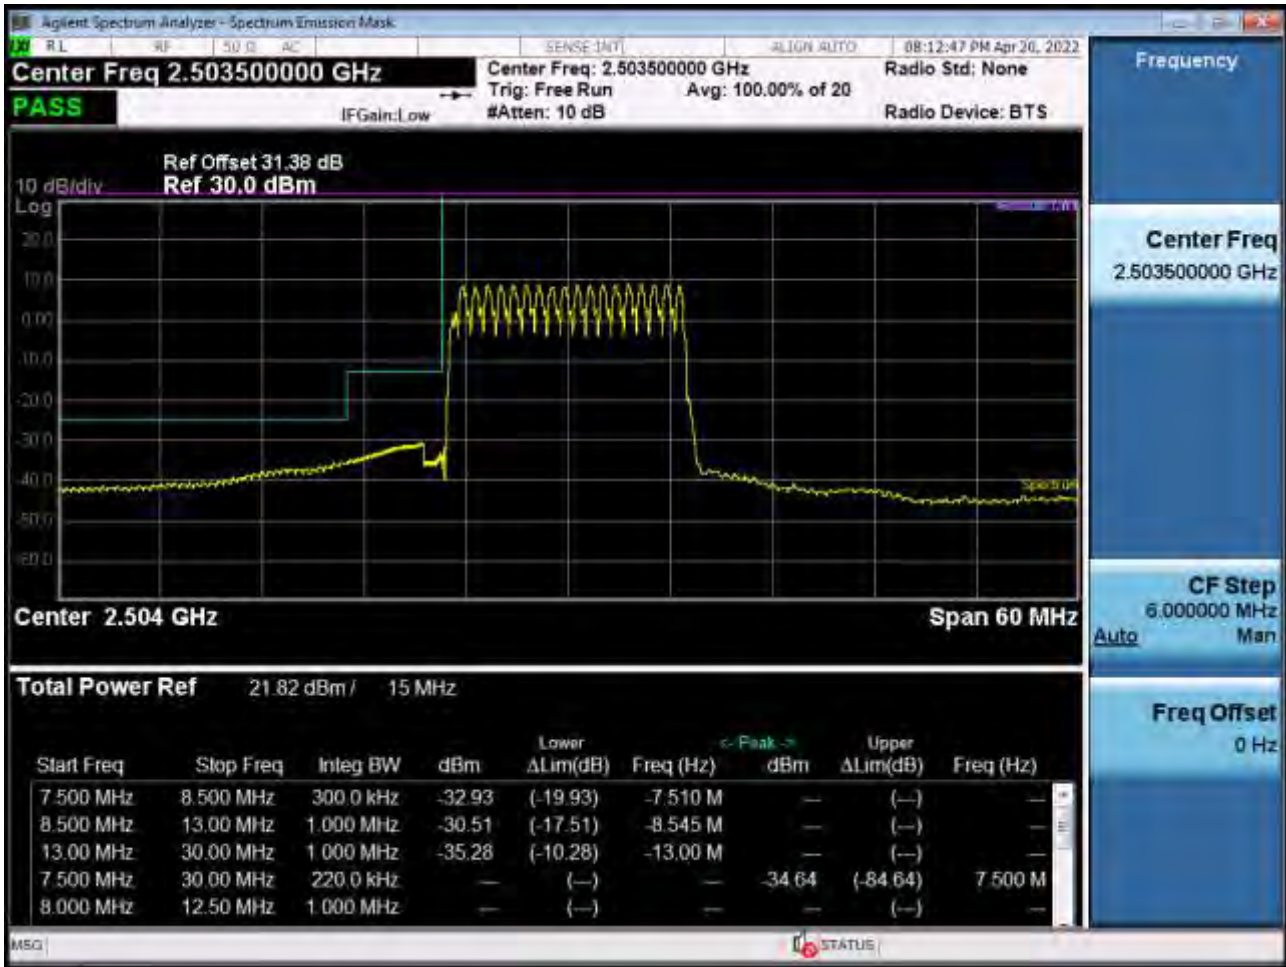


Low Channel Edge Plot (15 MHz Ch.39725 QPSK_RB75_Offset 0)-2 (POWER CLASS 2)



Mid Channel Edge Plot (15 MHz Ch.40620 QPSK RB 75) (POWER CLASS 2)




High Channel Edge Plot (15 MHz Ch.41515 QPSK RB 1, Offset 74) (POWER CLASS 2)

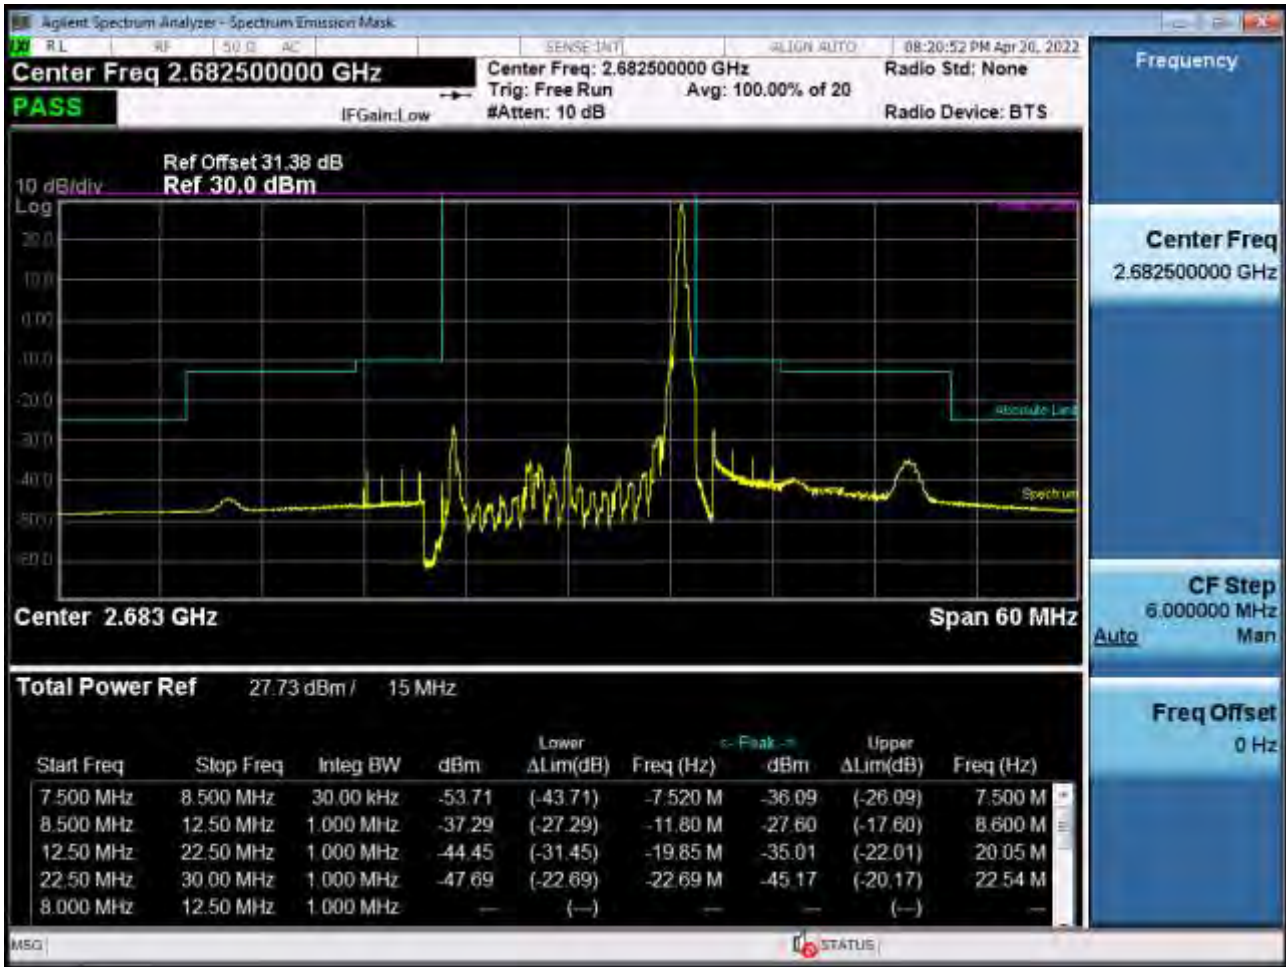


High Channel Edge Plot (15 MHz Ch.41515 QPSK_RB75_Offset 0) (POWER CLASS 2)




Low Channel Edge Plot (20 MHz Ch.39750 QPSK RB 1, Offset 0)-1 (POWER CLASS 2)

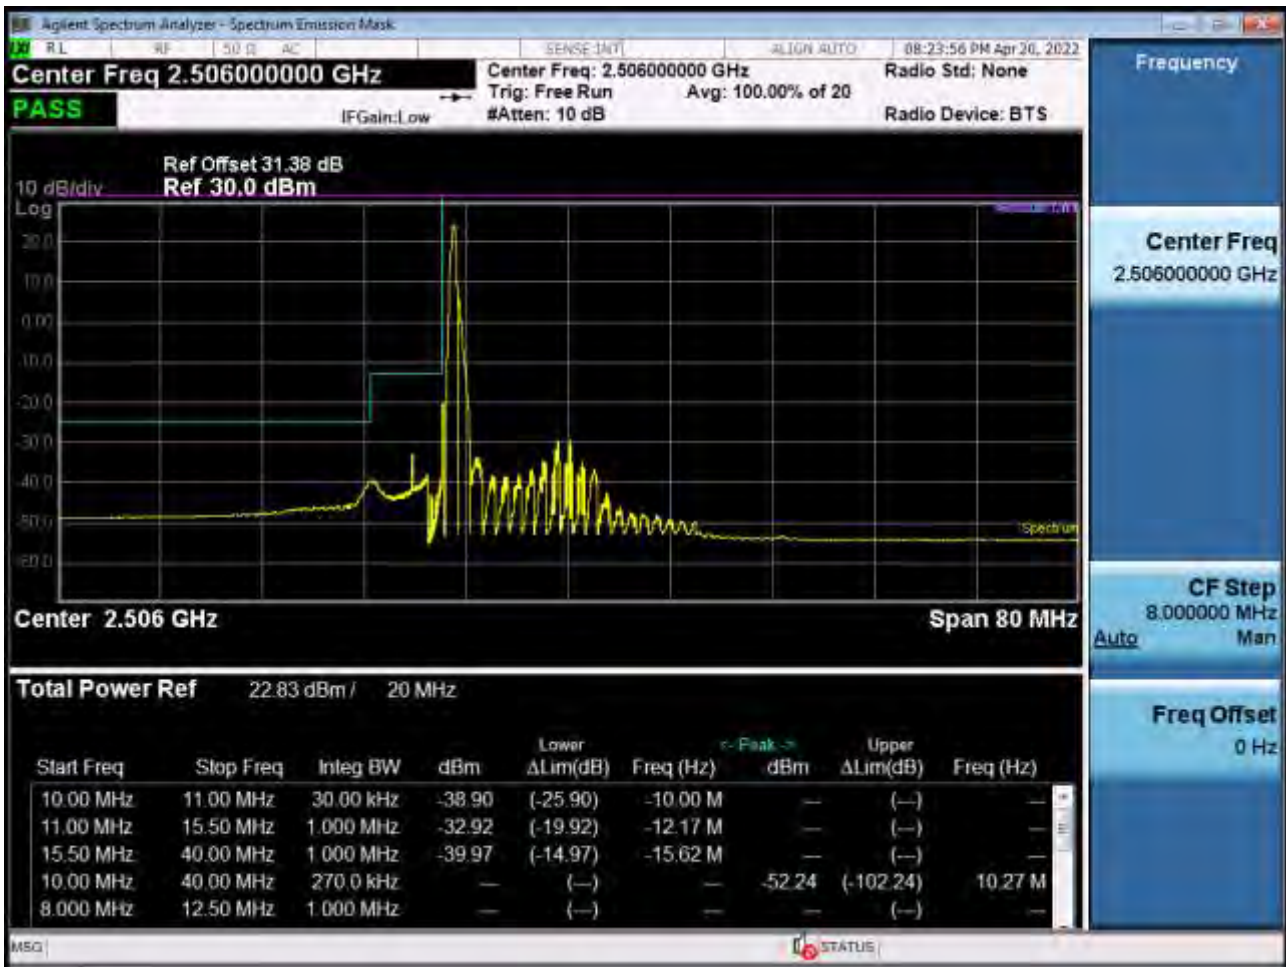

Low Channel Edge Plot (20 MHz Ch.39750 QPSK RB 1, Offset 0)-2 (POWER CLASS 2)

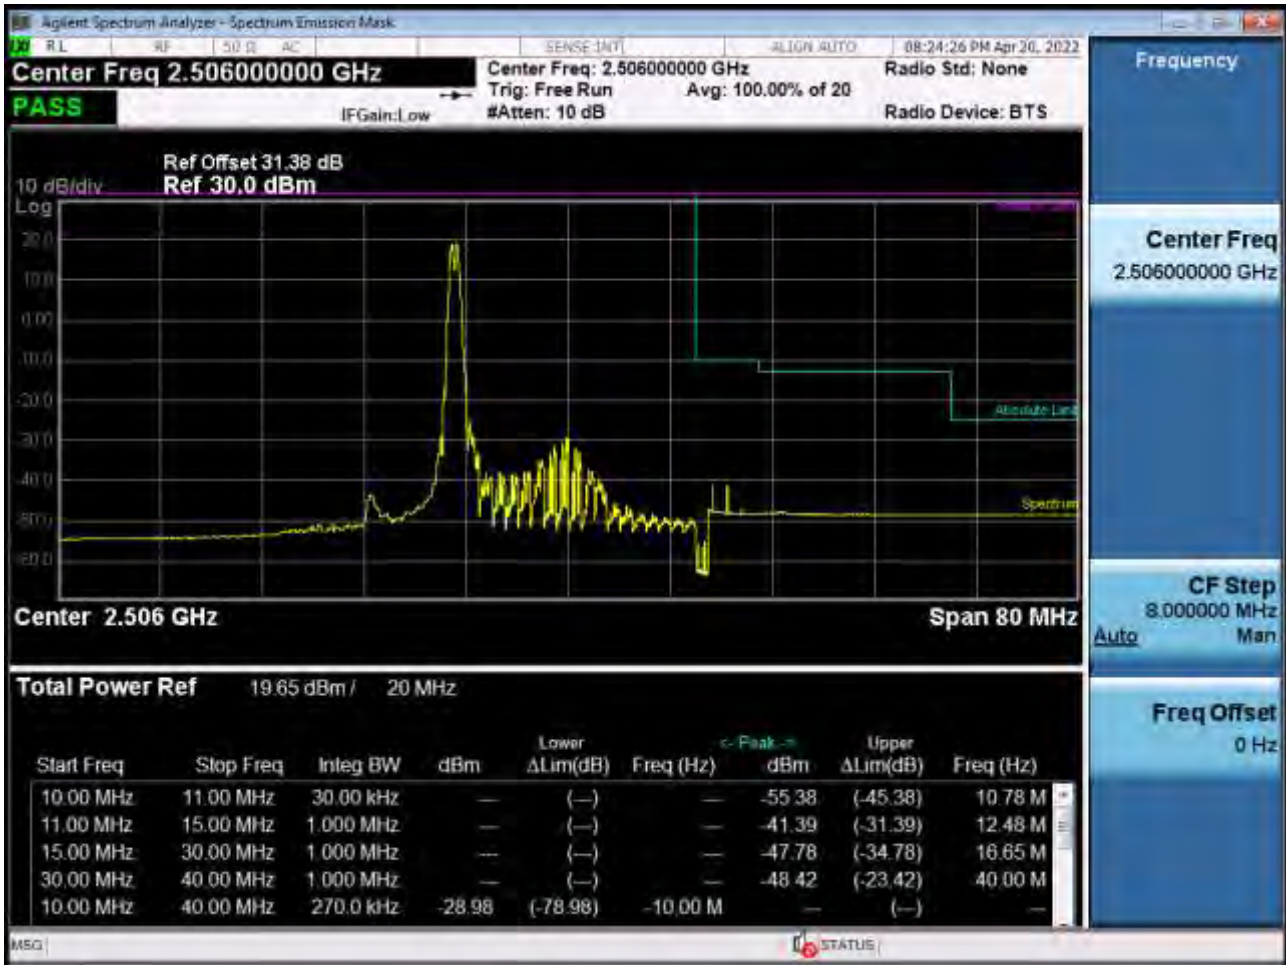


Low Channel Edge Plot (20 MHz Ch.39750 QPSK_RB100_Offset 0)-1 (POWER CLASS 2)

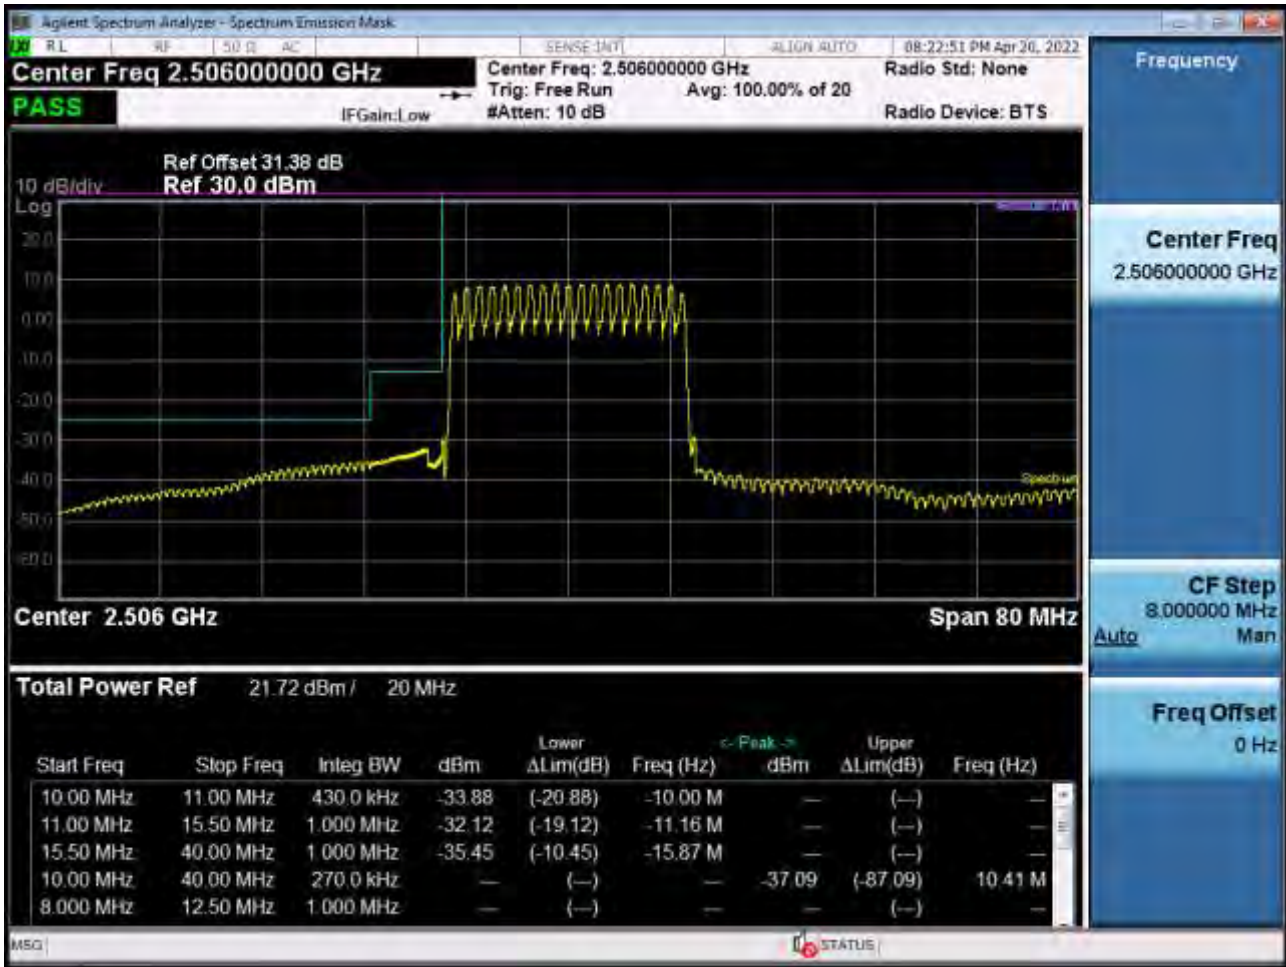


Low Channel Edge Plot (20 MHz Ch.39750 QPSK_RB100_Offset 0)-2 (POWER CLASS 2)



Mid Channel Edge Plot (20 MHz Ch.40620 QPSK RB 100) (POWER CLASS 2)

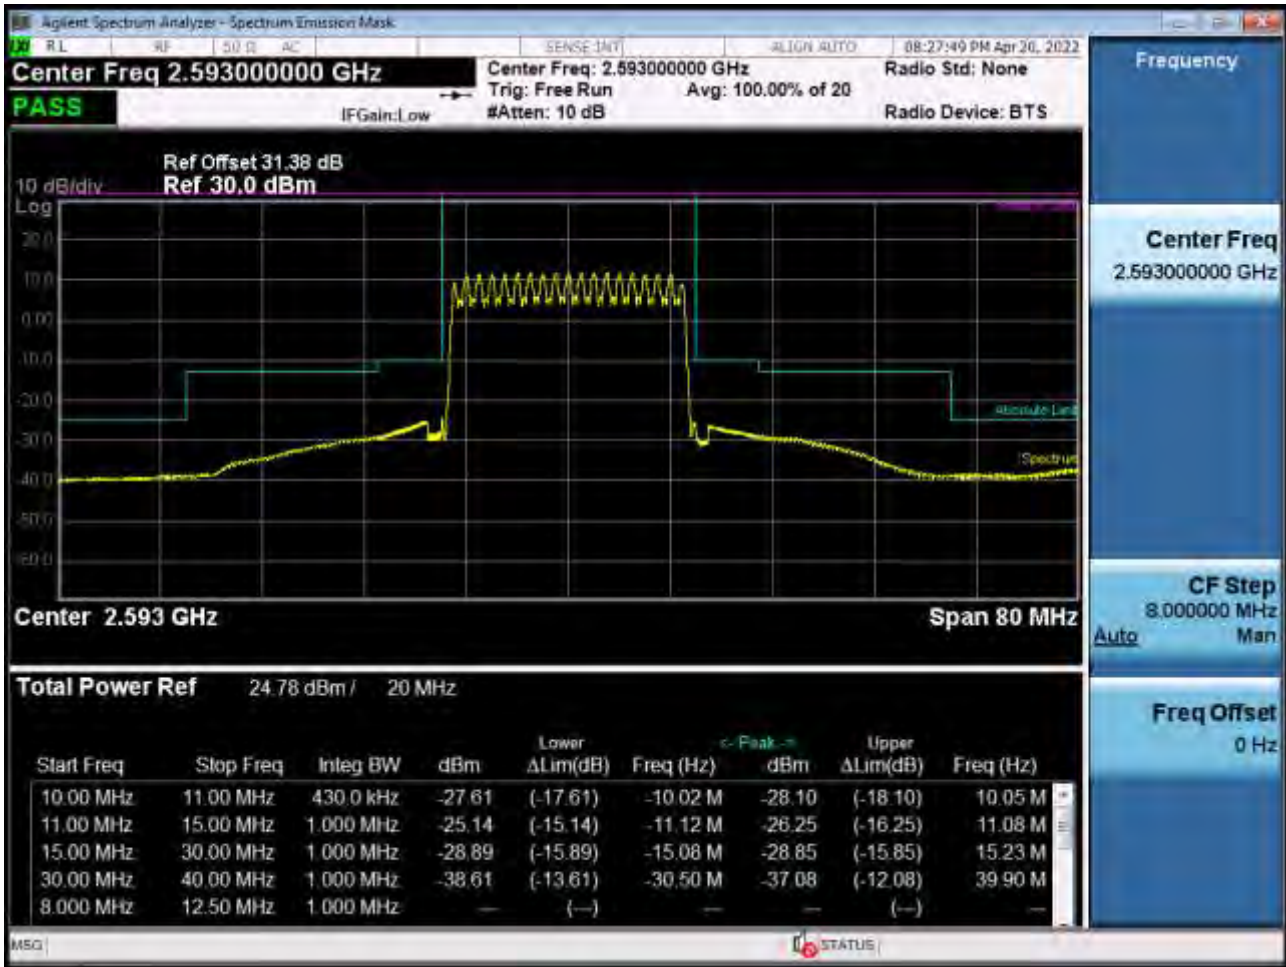


High Channel Edge Plot (20 MHz Ch.41490 QPSK RB 1, Offset 99) (POWER CLASS 2)

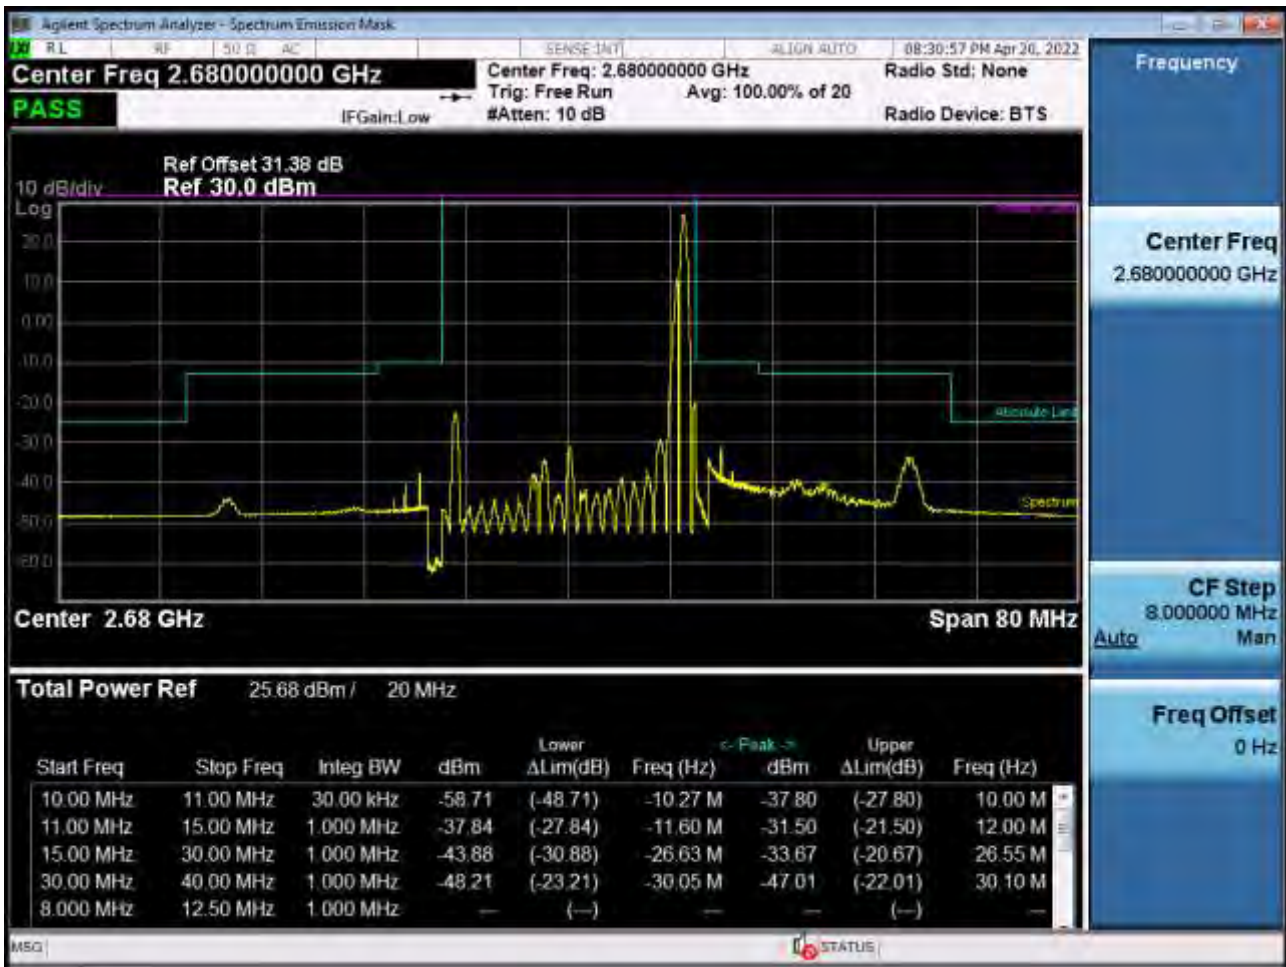

High Channel Edge Plot (20 MHz Ch.41490 QPSK_RB100_Offset 0) (POWER CLASS 2)



Conducted Spurious Plot 1 (5 MHz Ch.39675 QPSK RB 1, Offset 0) (POWER CLASS 3)

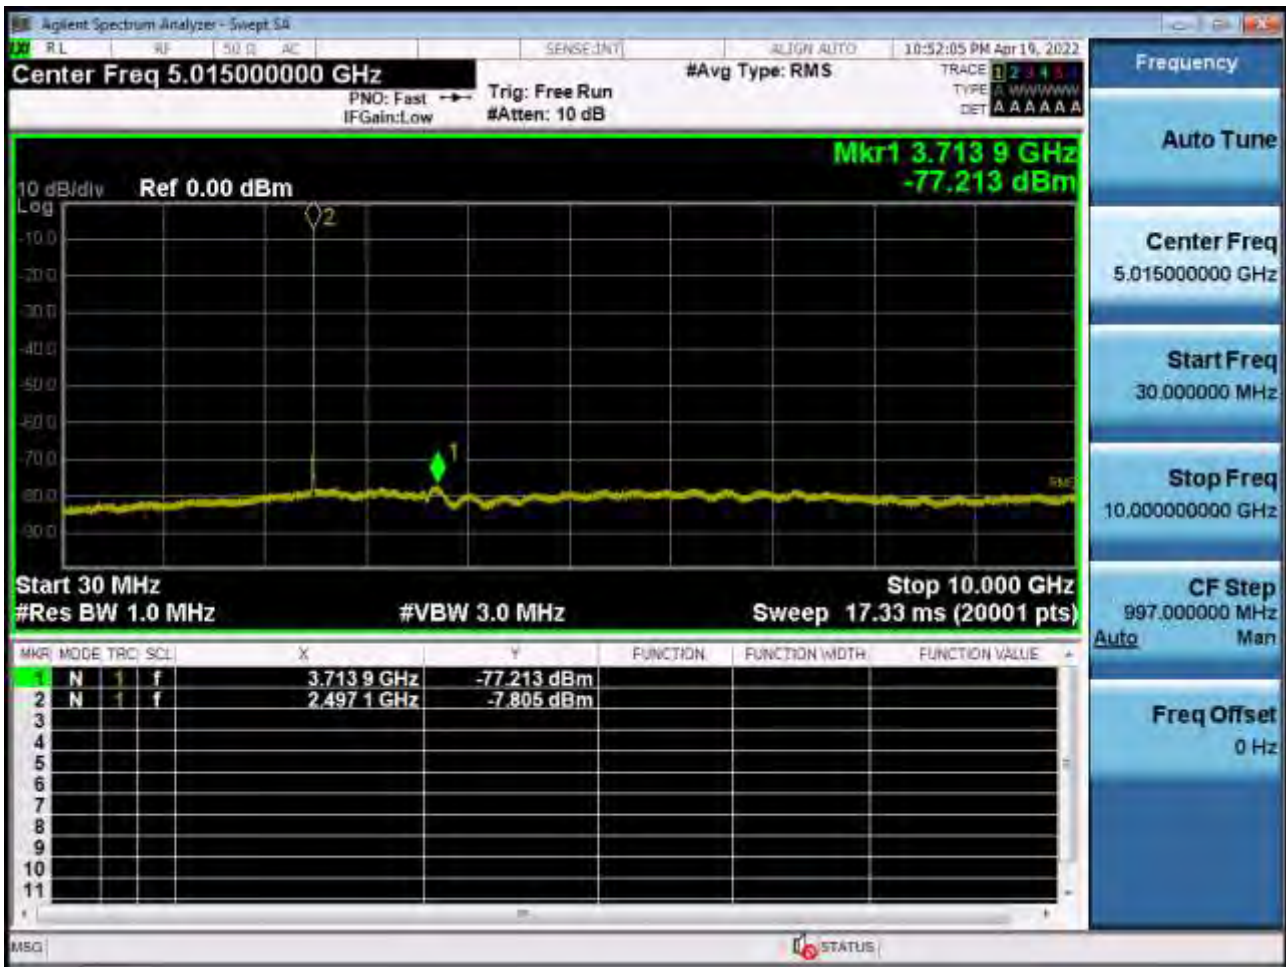


Conducted Spurious Plot 2 (5 MHz Ch. 39675 QPSK RB 1, Offset 0) (POWER CLASS 3)




Conducted Spurious Plot 1 (5 MHz Ch.39715 QPSK RB 1, Offset 0) (POWER CLASS 3)



Conducted Spurious Plot 2 (5 MHz Ch.39715 QPSK RB 1, Offset 0) (POWER CLASS 3)

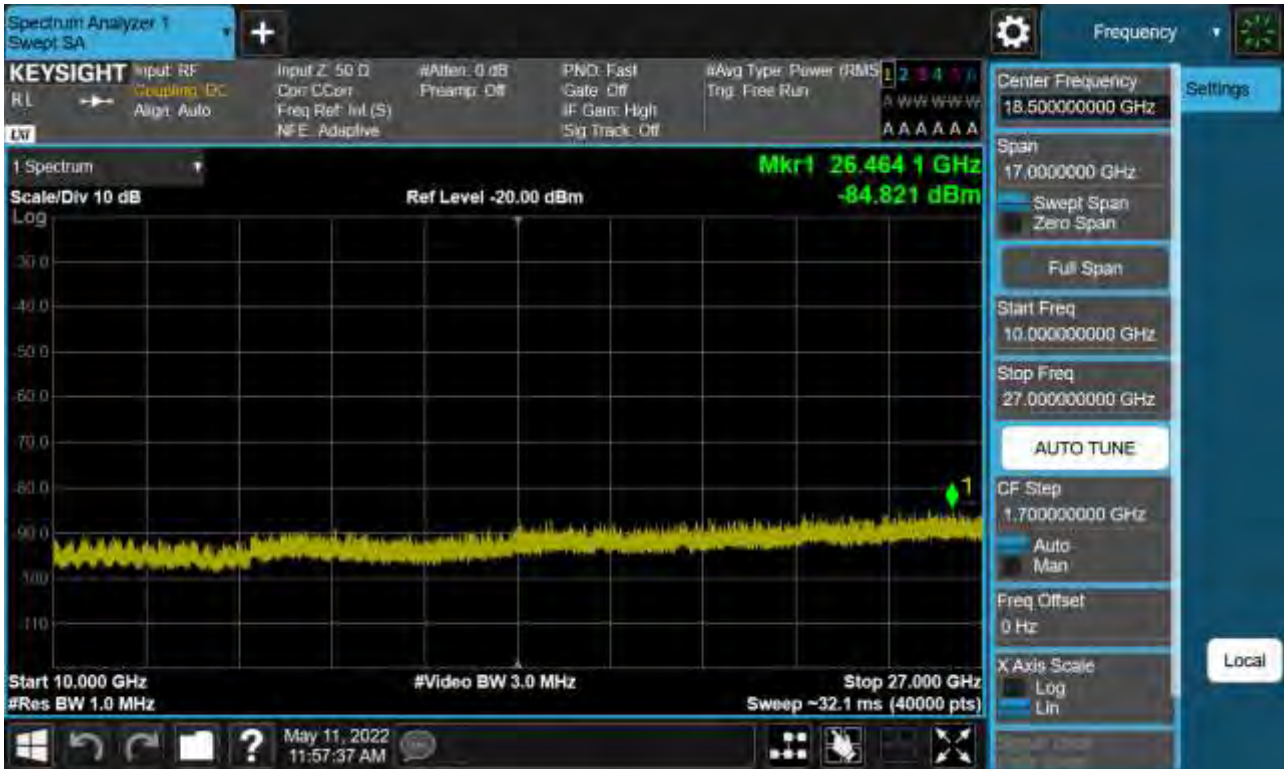


Conducted Spurious Plot 1 (5 MHz Ch.40620 QPSK RB 1, Offset 0) (POWER CLASS 3)

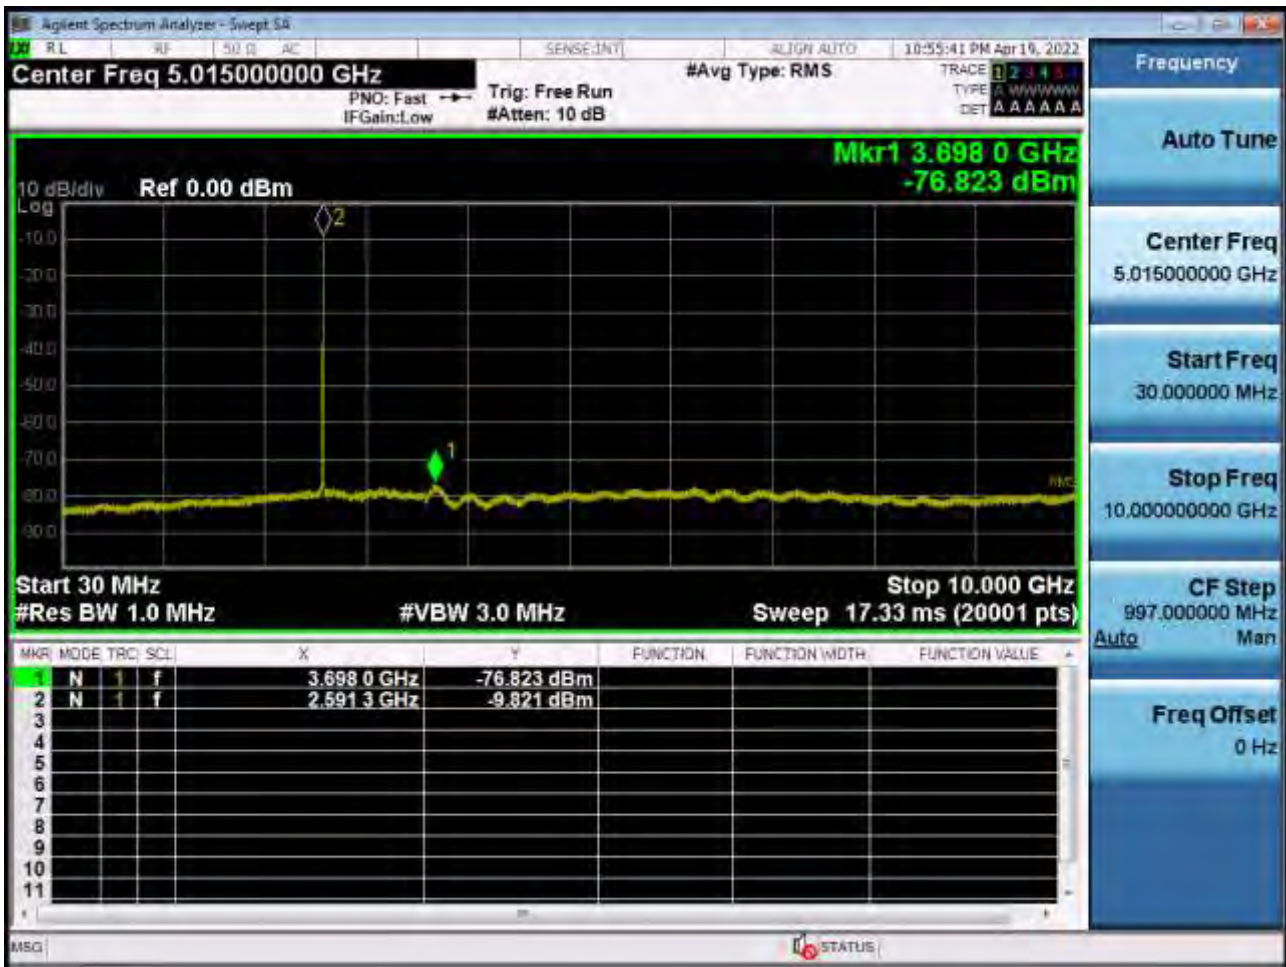

Conducted Spurious Plot 2 (5 MHz Ch. 40620 QPSK RB 1, Offset 0) (POWER CLASS 3)




Conducted Spurious Plot 1 (5 MHz Ch.41565 QPSK RB 1, Offset 0) (POWER CLASS 3)

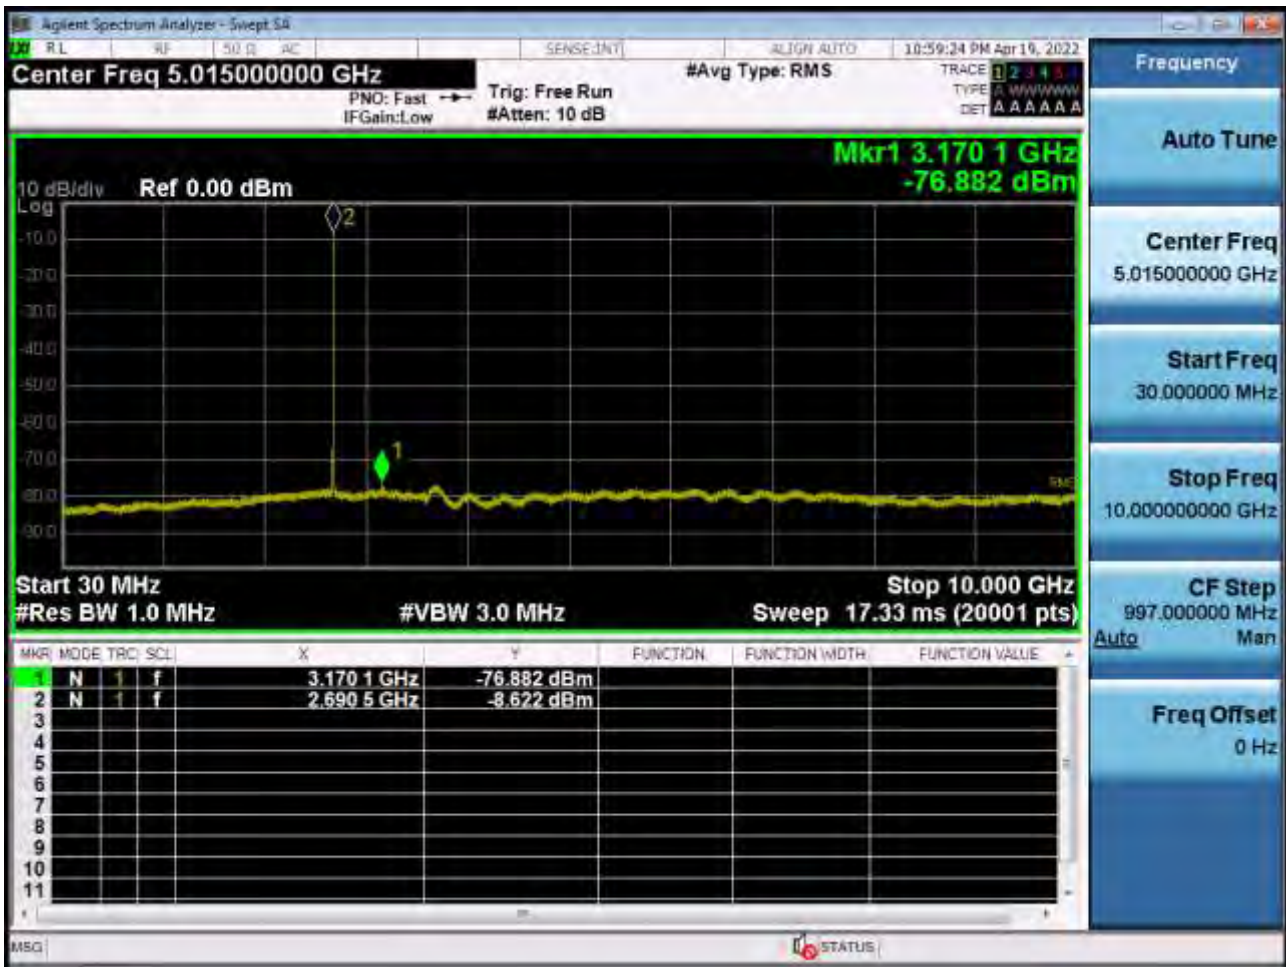

Conducted Spurious Plot 2 (5 MHz Ch. 41565 QPSK RB 1, Offset 0) (POWER CLASS 3)



Conducted Spurious Plot 1 (10 MHz Ch.39700 QPSK RB 1, Offset 0) (POWER CLASS 3)

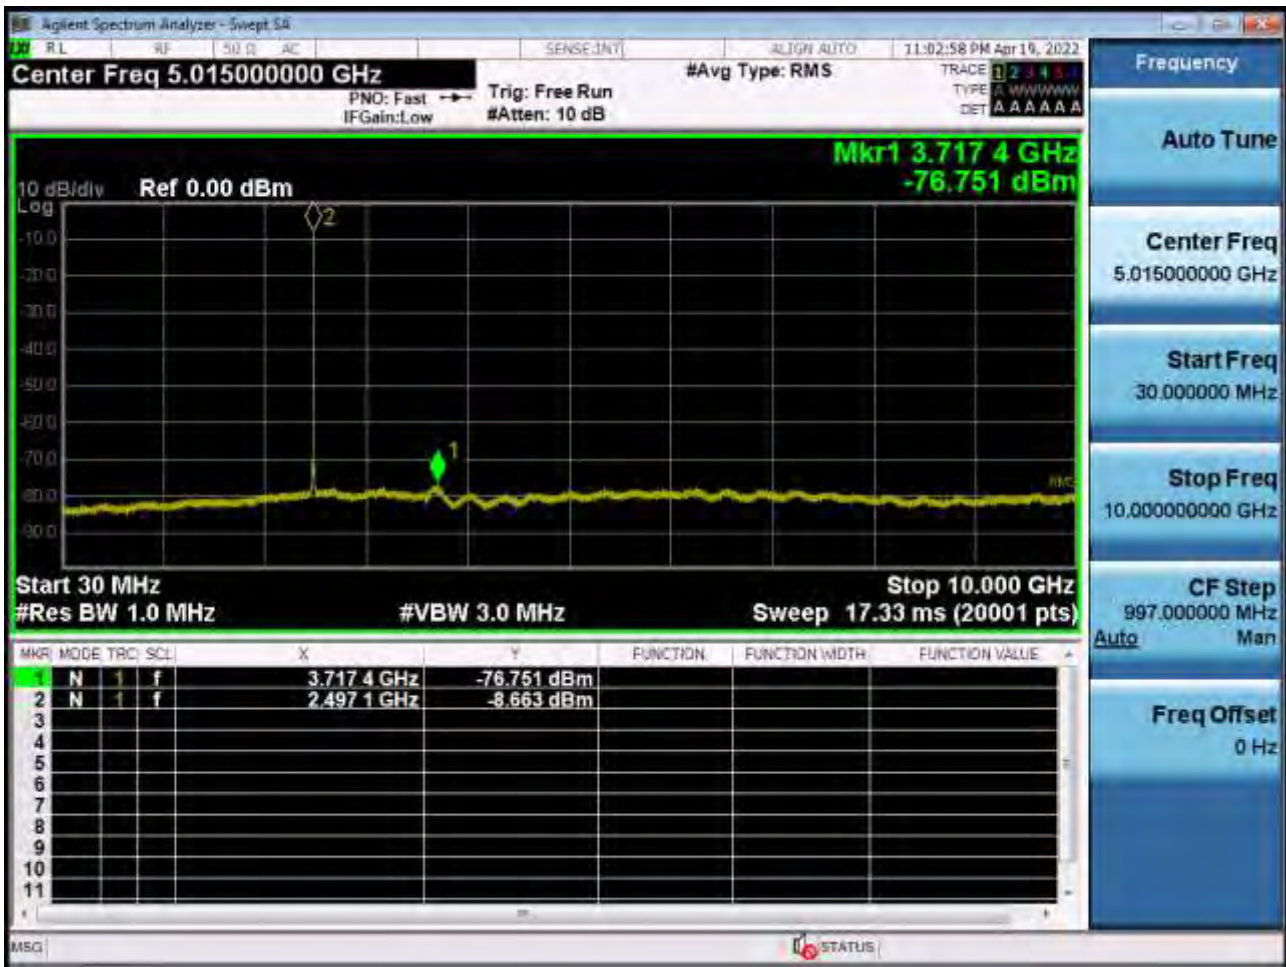


Conducted Spurious Plot 2 (10 MHz Ch. 39700 QPSK RB 1, Offset 0) (POWER CLASS 3)



Conducted Spurious Plot 1 (10 MHz Ch.39740 QPSK RB 1, Offset 0) (POWER CLASS 3)



Conducted Spurious Plot 2 (10 MHz Ch.39740 QPSK RB 1, Offset 0) (POWER CLASS 3)

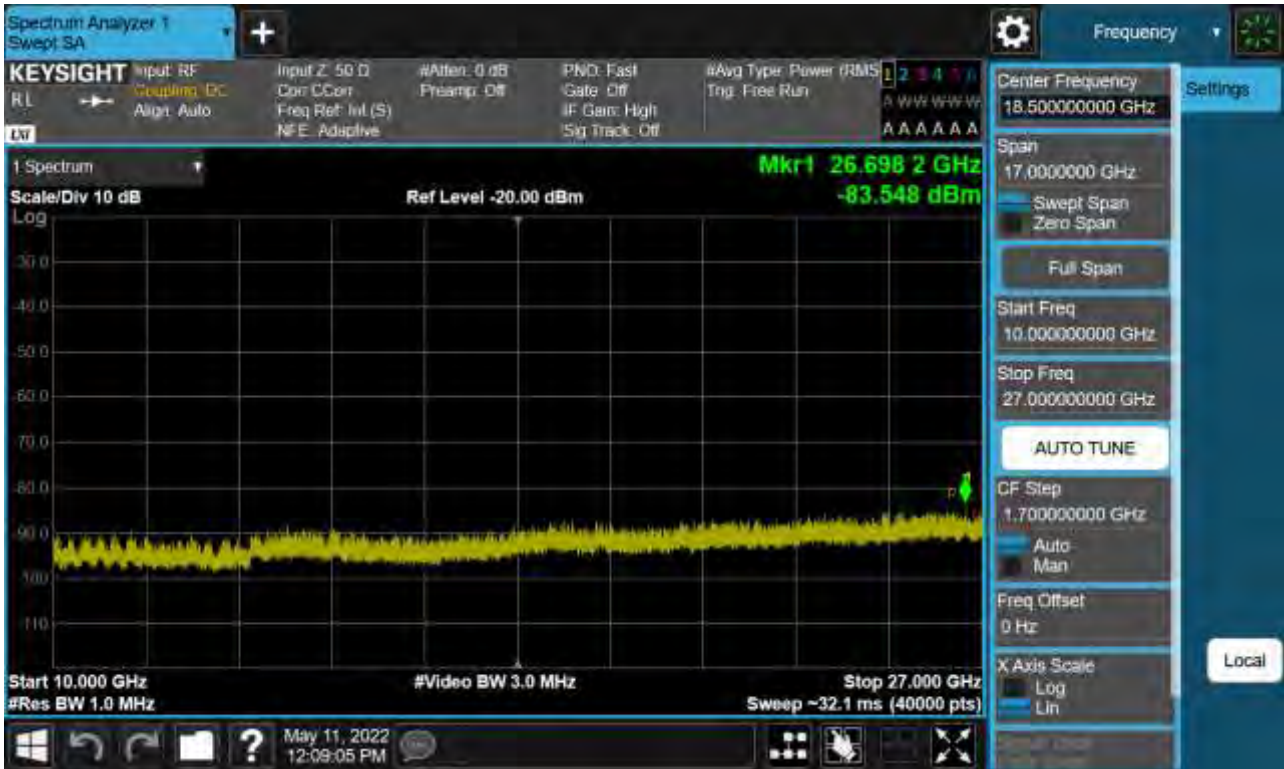

Conducted Spurious Plot 1 (10 MHz Ch.40620 QPSK RB 1, Offset 0) (POWER CLASS 3)



Conducted Spurious Plot 2 (10 MHz Ch. 40620 QPSK RB 1, Offset 0) (POWER CLASS 3)




Conducted Spurious Plot 1 (10 MHz Ch. 41540 QPSK RB 1, Offset 0) (POWER CLASS 3)



Conducted Spurious Plot 2 (10 MHz Ch. 41540 QPSK RB 1, Offset 0) (POWER CLASS 3)



Conducted Spurious Plot 1 (15 MHz Ch.39725 QPSK RB 1, Offset 0) (POWER CLASS 3)

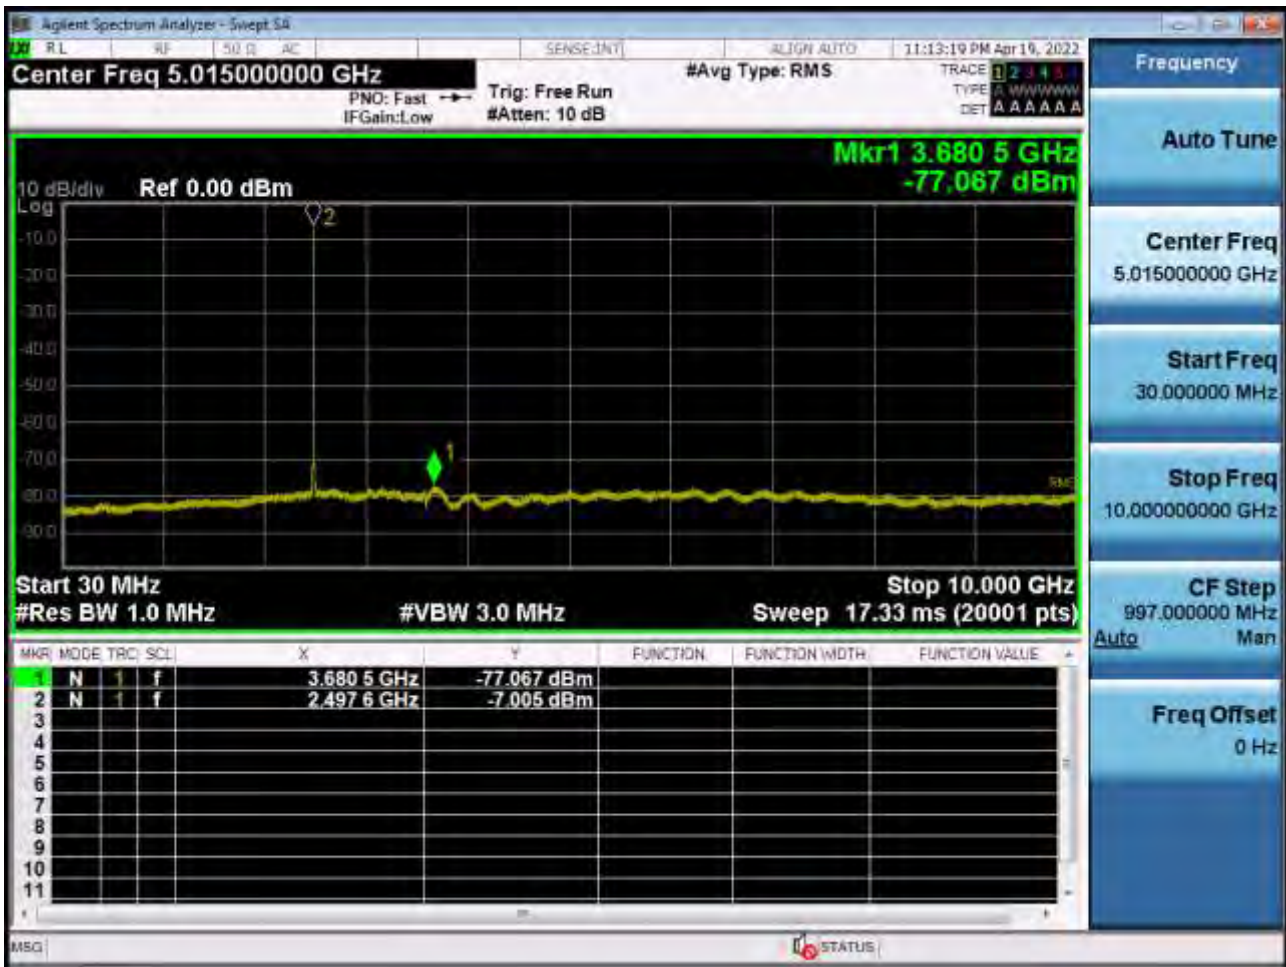

Conducted Spurious Plot 2 (15 MHz Ch. 39725 QPSK RB 1, Offset 0) (POWER CLASS 3)




Conducted Spurious Plot 1 (15 MHz Ch.39765 QPSK RB 1, Offset 0) (POWER CLASS 3)



Conducted Spurious Plot 2 (15 MHz Ch.39765 QPSK RB 1, Offset 0) (POWER CLASS 3)




Conducted Spurious Plot 1 (15 MHz Ch.40620 QPSK RB 1, Offset 0) (POWER CLASS 3)

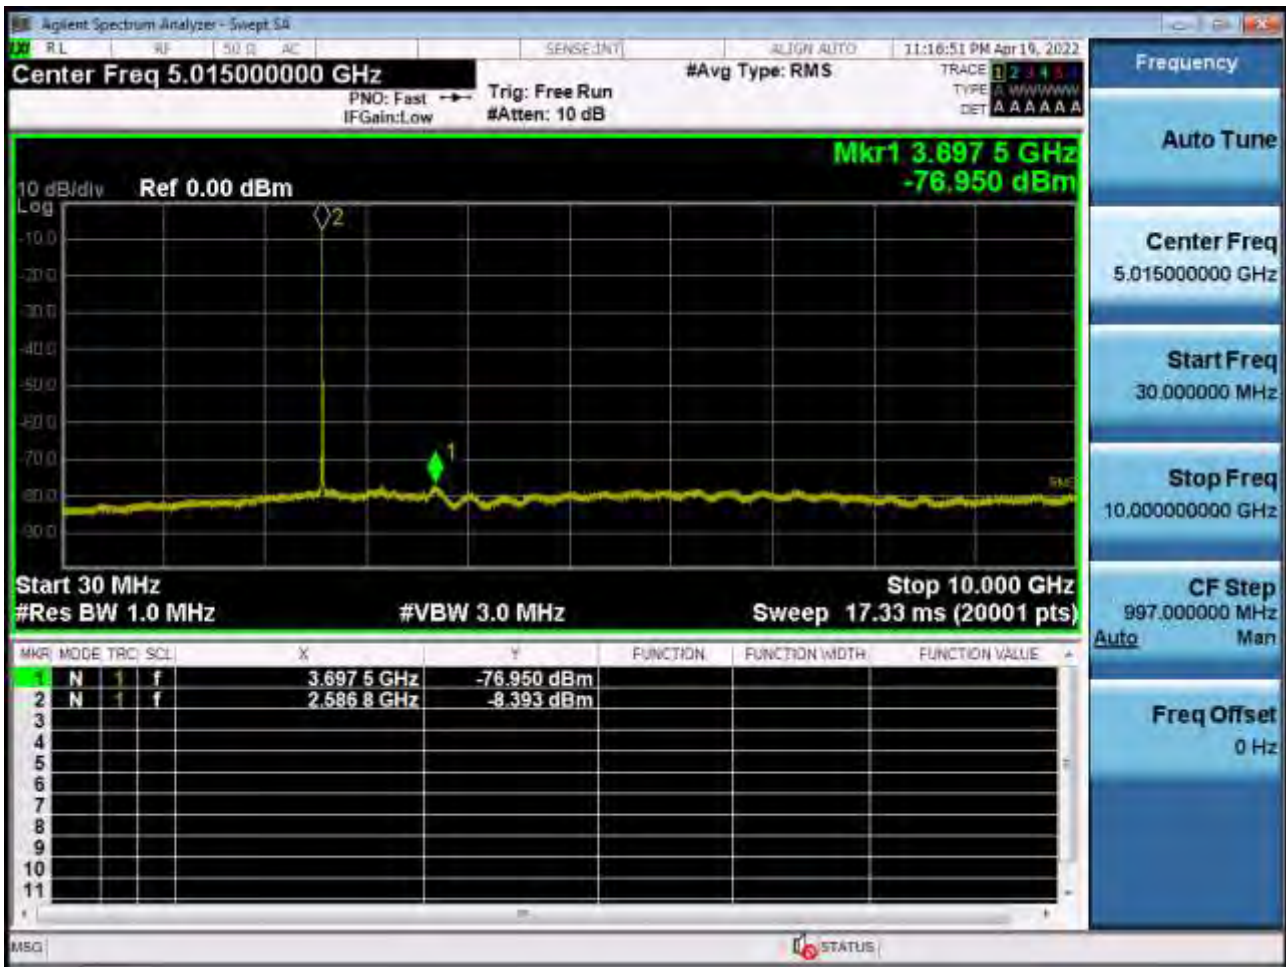

Conducted Spurious Plot 2 (15 MHz Ch. 40620 QPSK RB 1, Offset 0) (POWER CLASS 3)



Conducted Spurious Plot 1 (15 MHz Ch.41515 QPSK RB 1, Offset 0) (POWER CLASS 3)

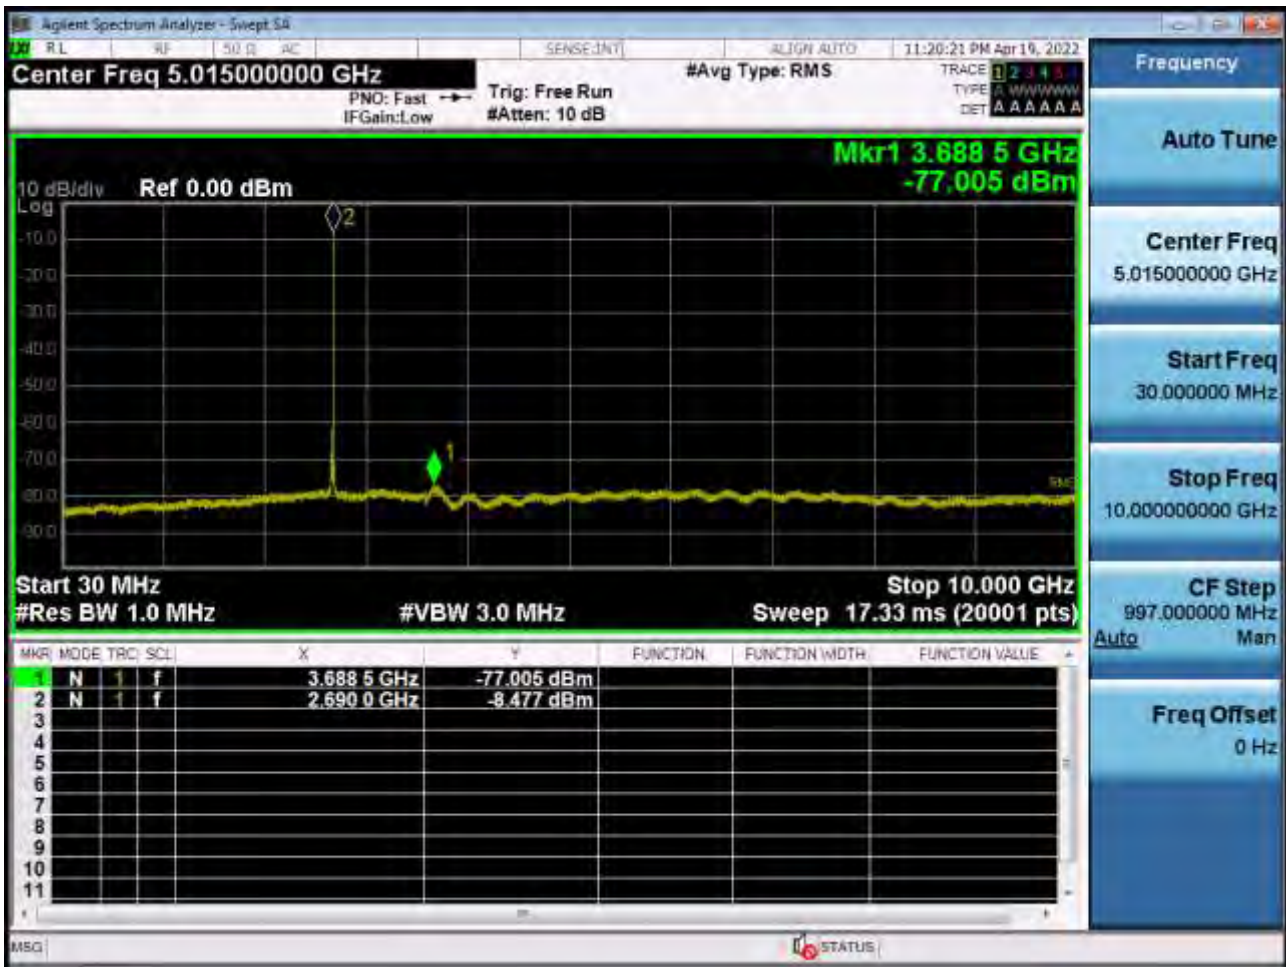

Conducted Spurious Plot 2 (15 MHz Ch. 41515 QPSK RB 1, Offset 0) (POWER CLASS 3)



Conducted Spurious Plot 1 (20 MHz Ch.39750 QPSK RB 1, Offset 0) (POWER CLASS 3)

