



CERTIFICATION TEST REPORT

Report Number. : 4789651209-E4V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-G991B/DS, SM-G991B

FCC ID : A3LSMG991B

EUT Description : GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,
WPT and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

November 26, 2020

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, LTD. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu

Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	11/18/20	Initial issue	Hyunsik Yun
V2	11/26/20	Updated to address TCB's question	Hyunsik Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
4.1. METROLOGICAL TRACEABILITY.....	7
4.2. SAMPLE CALCULATION.....	7
4.3. DECISION RULES.....	7
4.4. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. EUT DESCRIPTION.....	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. WORST-CASE CONFIGURATION AND MODE	9
5.5. DESCRIPTION OF TEST SETUP	11
6. MEASUREMENT METHOD.....	13
7. TEST AND MEASUREMENT EQUIPMENT	14
8. TEST RESULTS SUMMARY	15
9. ANTENNA PORT TEST RESULTS	16
9.1. ON TIME AND DUTY CYCLE	16
9.2. 6 dB BANDWIDTH	17
9.2.1. BLE (500 kbps).....	18
9.2.2. BLE (2Mbps).....	19
9.3. OUTPUT POWER.....	20
9.3.1. BLE (500 kbps).....	21
9.3.2. BLE (2 Mbps).....	22
9.4. AVERAGE POWER	23
9.5. POWER SPECTRAL DENSITY	24
9.5.1. BLE (500 kbps).....	25
9.5.2. BLE (2Mbps).....	26
9.6. CONDUCTED SPURIOUS EMISSIONS	27
9.6.1. BLE (500 kbps).....	28
9.6.2. BLE (2 Mbps).....	29
10. RADIATED TEST RESULTS	30

10.1.	LIMITS AND PROCEDURE	30
10.2.	TRANSMITTER ABOVE 1 GHz	32
10.2.1.	BLE (500 kbps).....	32
10.2.2.	BLE (2 Mbps)	39
10.3.	WORST CASE BELOW 1 GHZ.....	46
11.	AC POWER LINE CONDUCTED EMISSIONS	47
11.1.1.	AC Power Line.....	48

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, WPT and NFC

MODEL: SM-G991B/DS, SM-G991B

SERIAL NUMBER: 47d1a444d81f7ece, R3CN80HSZ6E (CONDUCTED)
R3CN90P9CQJ (RADIATED);

DATE TESTED: SEP 28, 2020 – NOV 06, 2020;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Hyunsik Yun
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 28.9 \text{ dBuV/m} &= 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} \end{aligned}$$

4.3. DECISION RULES

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

4.4. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.01 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.26 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.90 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.49 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, WPT and NFC. This test report addresses the DTS (BLE) operational mode.

This report covers the Samsung models SM-G991B/DS and SM-G991B. These models are identical in hardware except SM-G991B has single SIM tray. With some pre-scan, model SM-G991B/DS was set for final test.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	500kbps	Peak	8.869	7.707
		Average	8.444	6.988
	2Mbps	Peak	9.251	8.416
		Average	8.354	6.845

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
 Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes an internal antenna, with a maximum gain of -5.15 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Note : All radiated and power line conducted tests were performed attached with travel adapter for the worst case condition mode.

Power verification

The Output Power of all data rate are all investigated, the 500 kbps(37 pkt) and 2 Mbps(37 pkt) power is the worst case for symbol rate. All tests were performed in these two modes.

Symbol Rate [Ms/s]	Mode	Frequency [MHz]	Conducted Burst Avg [dBm]	Symbol Rate [Ms/s]	Mode	Frequency [MHz]	Conducted Burst Avg [dBm]
1	1Mbps (37 pkt)	2402	6.924	2	2Mbps (37 pkt)	2402	6.819
		2440	8.166			2440	8.144
		2480	8.381			2480	8.354
	1Mbps (255 pkt)	2402	6.775		2Mbps (255 pkt)	2402	6.776
		2440	8.138			2440	8.222
		2480	8.370			2480	8.345
1	125 kbps (37 pkt)	2402	6.895				
		2440	8.246				
		2480	8.336				
	125 kbps (255 pkt)	2402	6.853				
		2440	8.191				
		2480	8.351				
	500 kbps (37 pkt)	2402	6.937				
		2440	8.272				
		2480	8.444				
	500 kbps (255 pkt)	2402	6.872				
		2440	8.210				
		2480	8.394				

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37N8BT85J8SE3	N/A
Data Cable	SAMSUNG	EP-DN980BBE	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software in hidden menu exercised the EUT to enable BLE mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

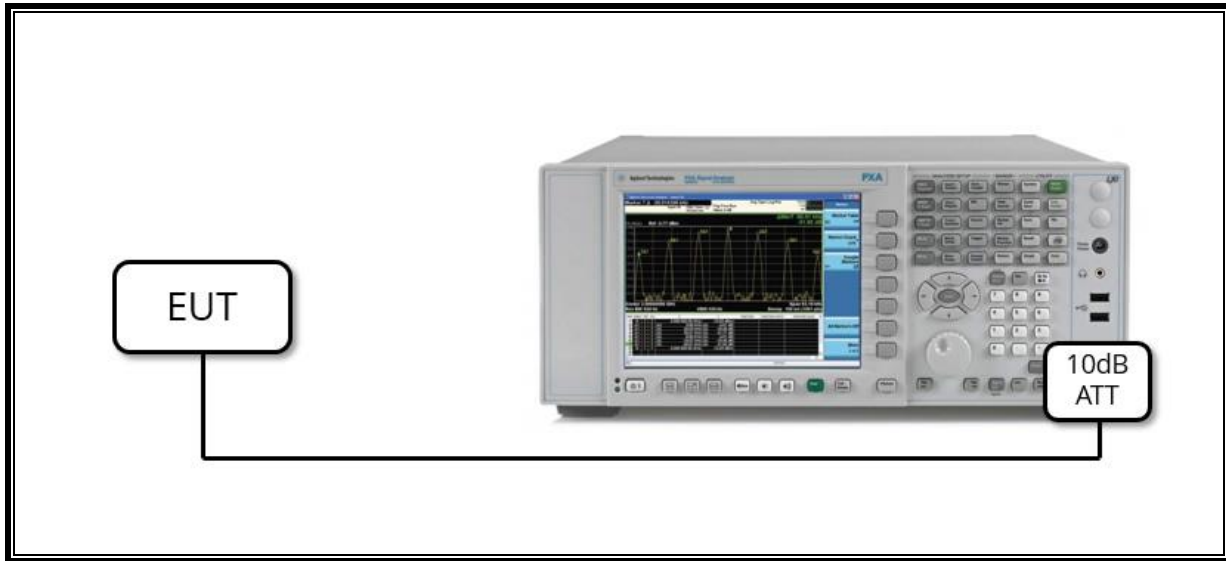

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

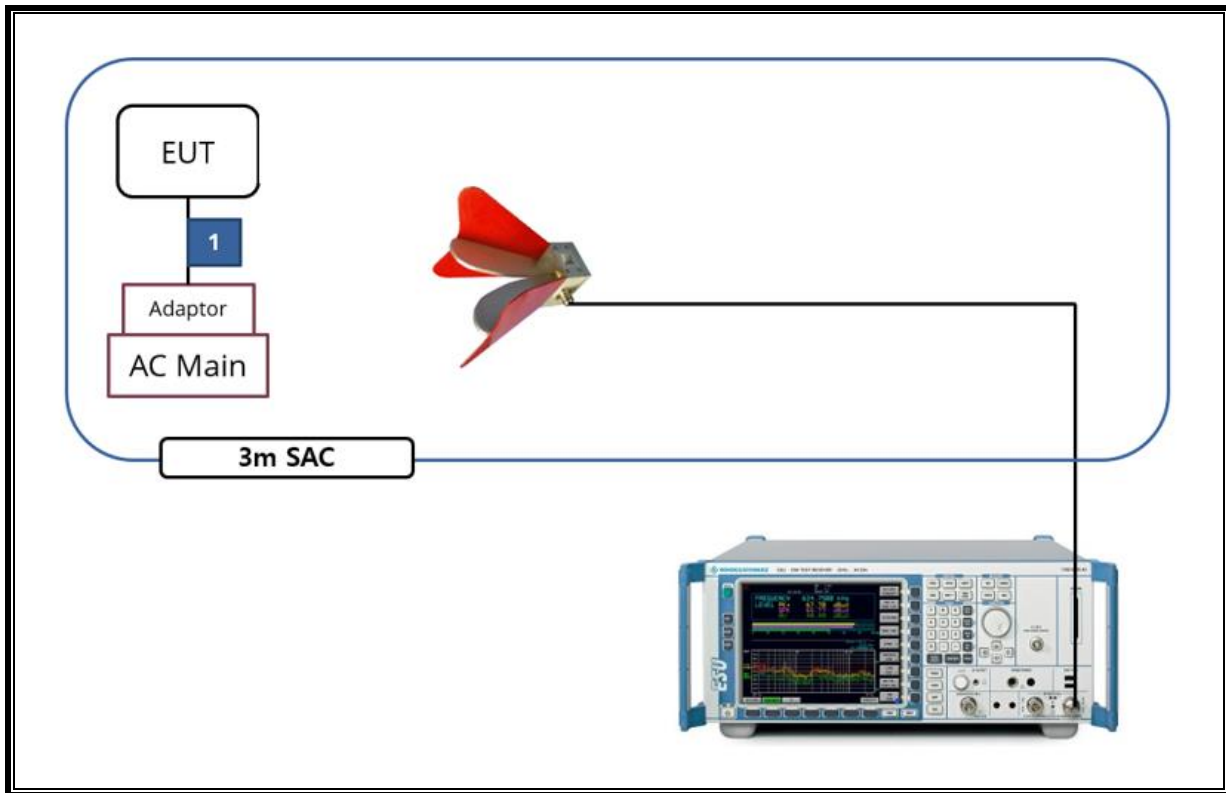

6. MEASUREMENT METHOD

6 dB BW : KDB 558074 D01 v05r02, Section 8.2.

OUTPUT POWER : KDB 558074 D01 v05r02, Section 8.3.1.1

POWER SPECTRAL DENSITY : KDB 558074 D01 v05r02, Section 8.4.

Out-of-band Emissions (Conducted) : KDB 558074 D01 v05r02, Section 8.5.

Out-of-band Emissions in Non-restricted Bands: KDB 558074 D01 v05r02, Section 8.5.

Out-of-band Emissions in Restricted Bands : KDB 558074 D01 v05r02, Section 8.6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-19-22
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-13-22
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-13-22
Antenna, Horn, 18 GHz	ETS	3115	00167211	07-27-22
Antenna, Horn, 18 GHz	ETS	3115	00161451	08-15-22
Antenna, Horn, 18 GHz	ETS	3117	00168724	07-27-22
Antenna, Horn, 18 GHz	ETS	3117	00168717	08-15-22
Antenna, Horn, 40 GHz	ETS	3116C	00166155	08-04-22
Antenna, Horn, 40 GHz	ETS	3116C	00168645	10-02-21
Preamplifier	ETS	3116C-PA	00168841	08-06-21
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-03-21
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-03-21
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-06-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-03-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-03-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-04-21
Spectrum Analyzer, 44 GHz	Keysight	N9030B	MY57143717	01-20-21
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-05-21
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-05-21
Spectrum Analyzer, 43.5 GHz	R&S	FSW43	104089	08-06-21
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-05-21
Attenuator	PASTERNAK	PE7087-10	A001	08-03-21
Attenuator	PASTERNAK	PE7087-10	A008	08-03-21
Attenuator	PASTERNAK	PE7004-10	2	08-04-21
Attenuator	PASTERNAK	PE7087-10	A009	08-03-21
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-03-21
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-03-21
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-04-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-03-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-03-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-04-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-03-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-03-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-04-21
LISN	R&S	ENV-216	101837	08-06-21
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-02-21
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

8. TEST RESULTS SUMMARY

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.247 (a)(2)	Occupied Band width (6dB)	>500KHz	Conducted	Pass
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass
15.247 (b)(3)	TX conducted output power	<30dBm		Pass
15.247 (e)	PSD	<8dBm		Pass
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	Pass


9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

Mode	On time [msec]	Period [msec]	Duty cycle x [Linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum CBW [kHz]
2 400 ~ 2 483.5 MHz Bands						
BLE 500 kbps [37pkt]	1.057	1.875	0.56	56.37	2.49	0.95
BLE 2 Mbps [37pkt]	0.193	0.625	0.31	30.92	5.10	5.17

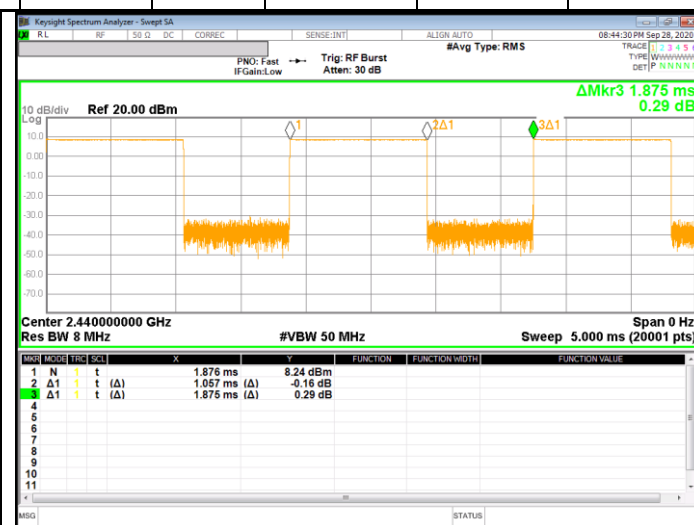

500 kbps(37 pkt)



2 Mbps(37 pkt)

9.2. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)




RSS-247 5.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS




9.2.1. BLE (500 kbps)

Channel	Frequency [MHz]	6 dB Bandwidth [kHz]	Minimum Limit [kHz]
Low	2 402	661.8	500.0
Mid	2 440	661.4	500.0
High	2 480	658.8	500.0
Worst		658.8	500.0

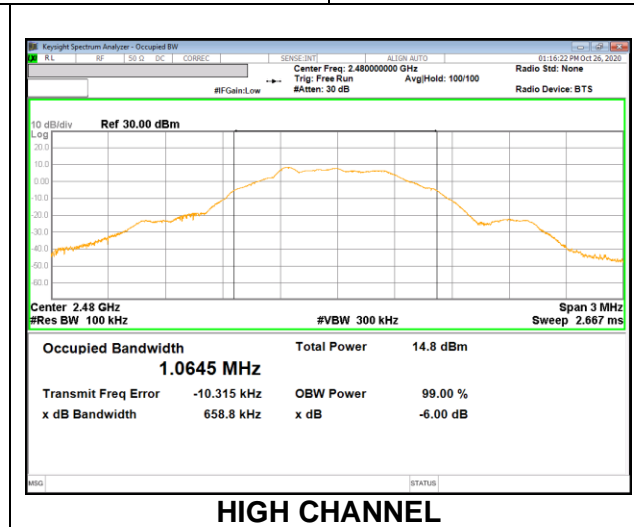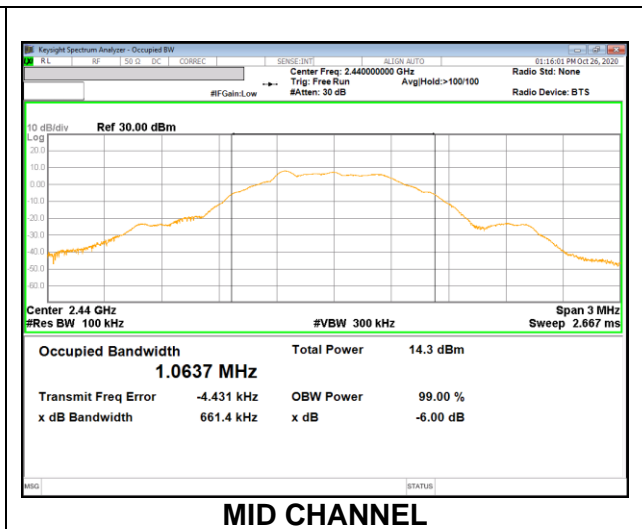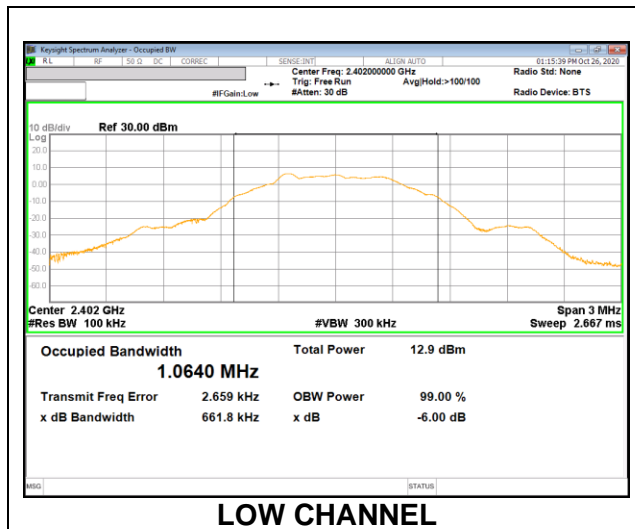

9.2.2. BLE (2Mbps)

Channel	Frequency [MHz]	6 dB Bandwidth [kHz]	Minimum Limit [kHz]
Low	2 402	1 238.0	500.0
Mid	2 440	1 238.0	500.0
High	2 480	1 234.0	500.0
Worst		1 234.0	500.0

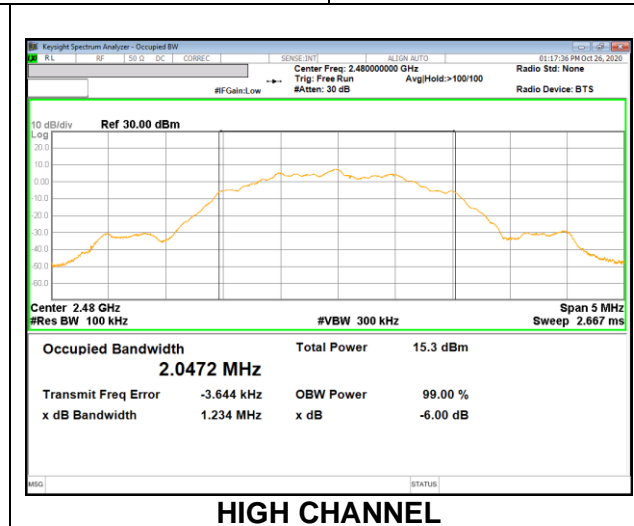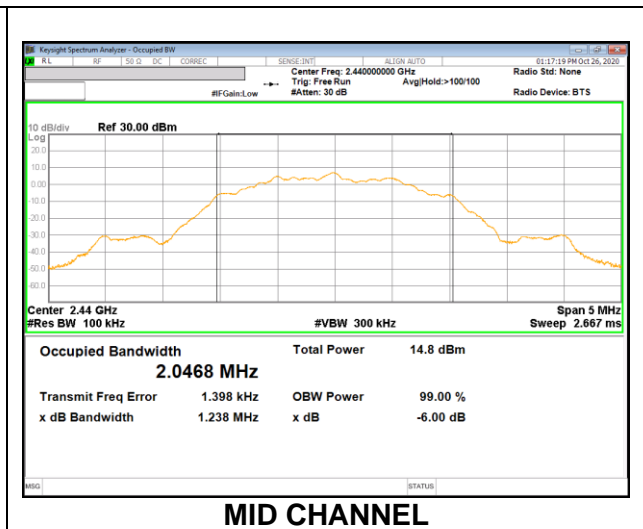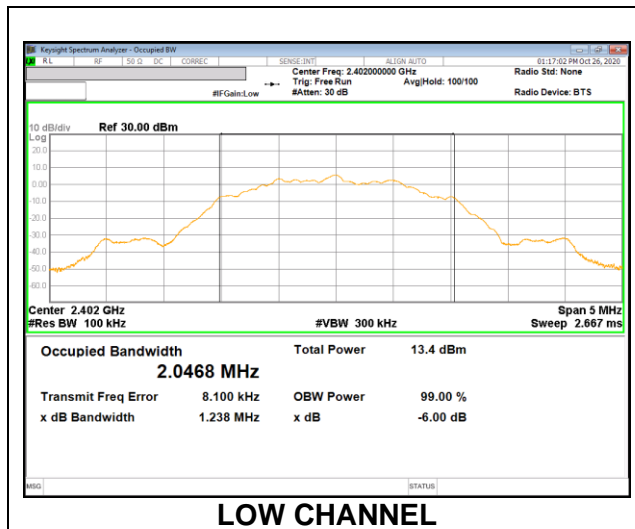

9.3. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

Peak power is measured using ANSI C63.10(2013) under section 11.9.1.1 utilizing spectrum analyzer.

RESULTS

- 500 kbps


Channel	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	7.305	30.000	-22.695
Mid	2440	8.676	30.000	-21.324
High	2480	8.869	30.000	-21.131
Worst		8.869	30.000	-21.131

- 2 Mbps

Channel	Frequency [MHz]	Peak Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	7.572	30.000	-22.428
Mid	2440	8.879	30.000	-21.121
High	2480	9.251	30.000	-20.749
Worst		9.251	30.000	-20.749


9.3.1. BLE (500 kbps)

PEAK OUTPUT POWER PLOTS

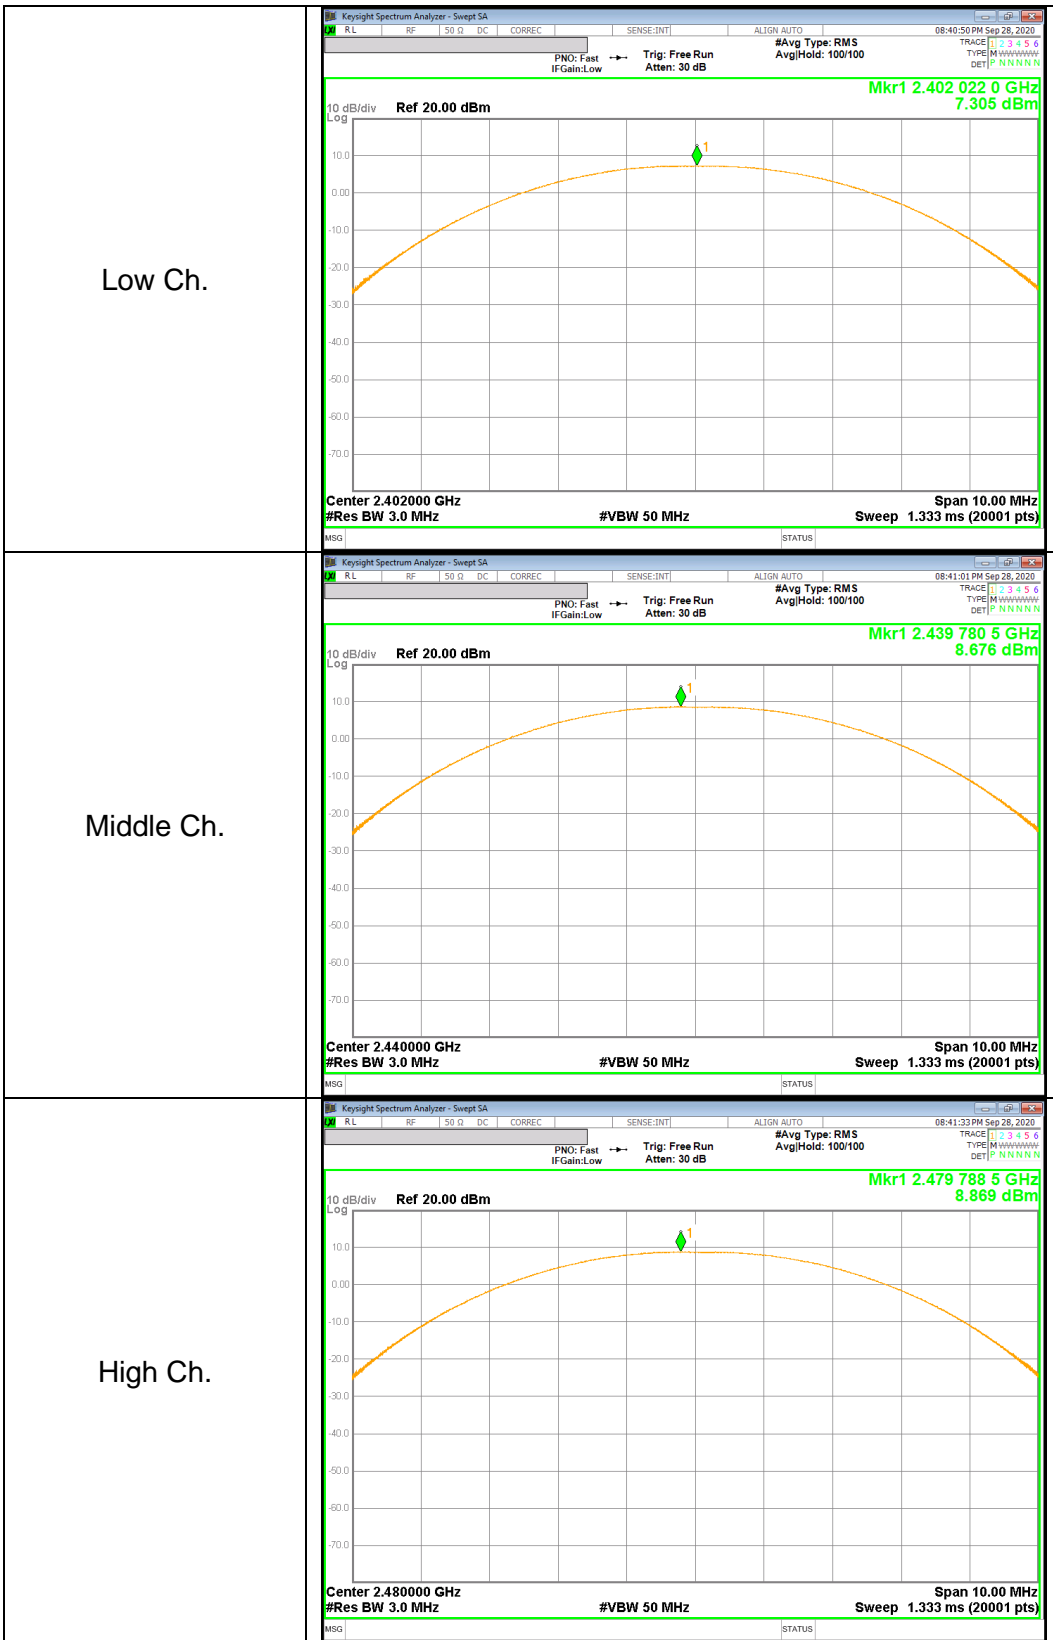

9.3.2. BLE (2 Mbps)

PEAK OUTPUT POWER PLOTS

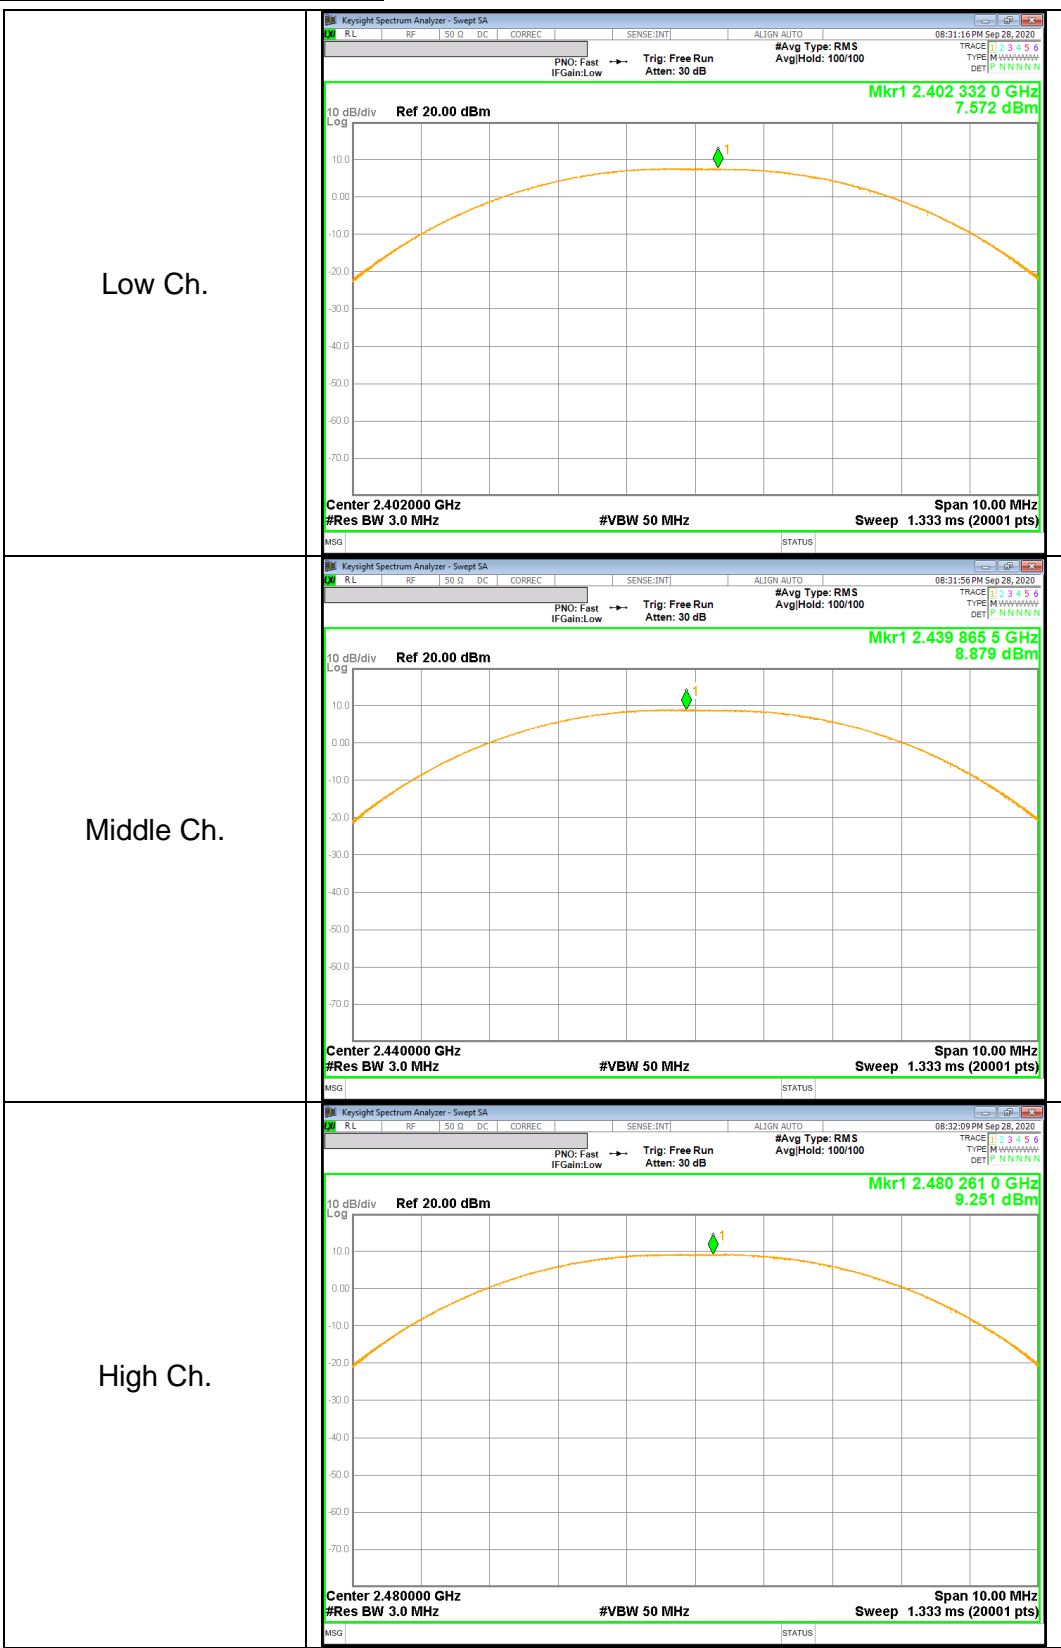

9.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power. The duty factor already has been added.

- 500 kbps

Channel	Frequency [MHz]	AV Power [dBm]	AV Power [mW]
Low	2402	6.937	4.939
Mid	2440	8.272	6.717
High	2480	8.444	6.988

- 2 Mbps

Channel	Frequency [MHz]	AV Power [dBm]	AV Power [mW]
Low	2402	6.819	4.807
Mid	2440	8.144	6.523
High	2480	8.354	6.845

9.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)




RSS-247 (5.2) (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS




9.5.1. BLE (500 kbps)

Channel	Frequency [MHz]	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Margin [dB]
Low	2402	0.088	8.000	-7.912
Mid	2440	1.560	8.000	-6.440
High	2480	1.956	8.000	-6.044

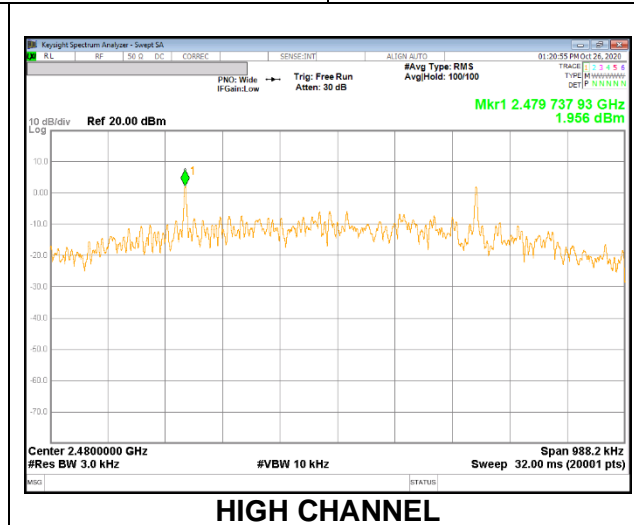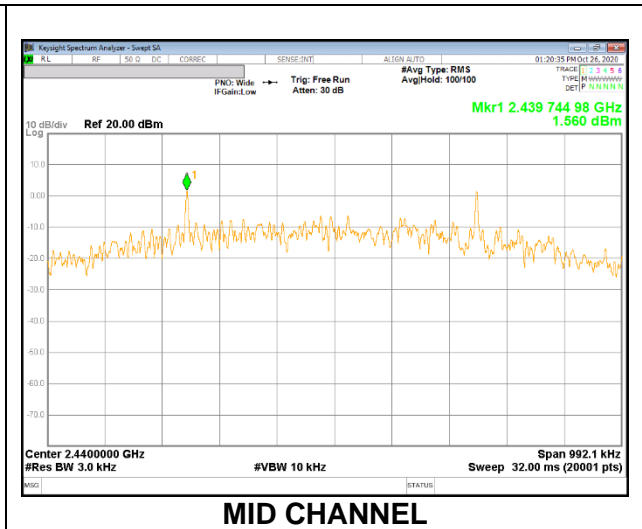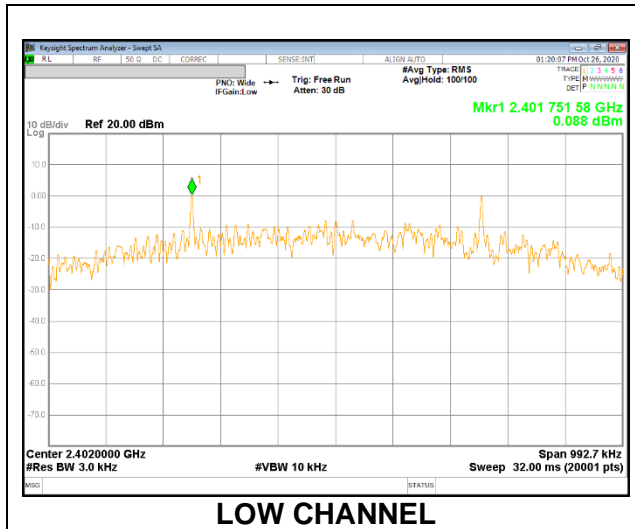

9.5.2. BLE (2Mbps)

Channel	Frequency [MHz]	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Margin [dB]
Low	2402	-11.352	8.000	-19.352
Mid	2440	-9.953	8.000	-17.953
High	2480	-9.548	8.000	-17.548

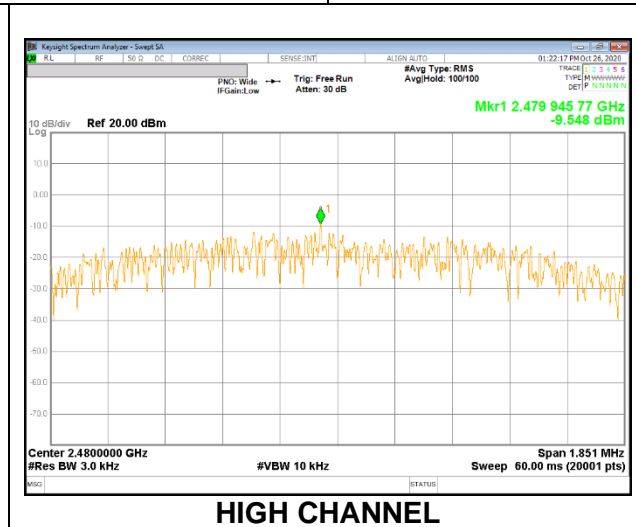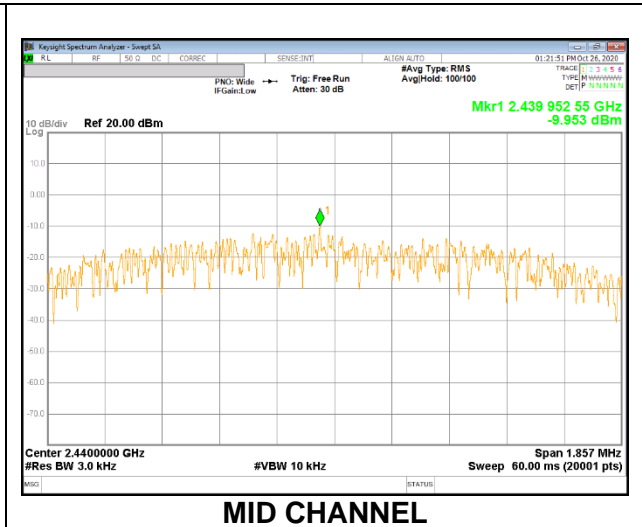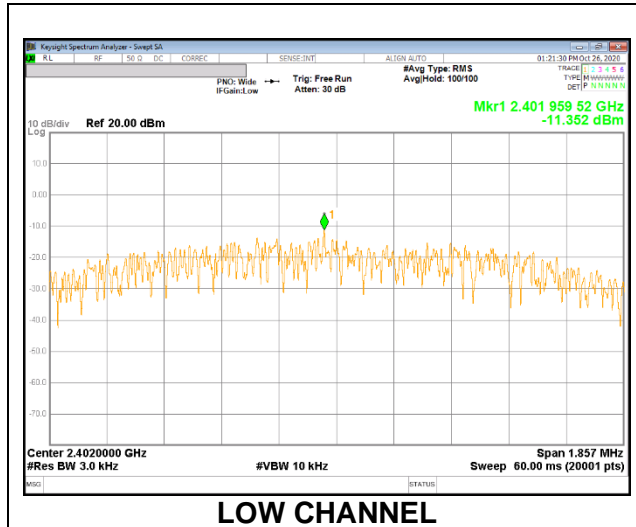

9.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS


FCC §15.247 (d)

RSS-247 5.5


Output power was measured based on the use of a peak measurement. Therefore, spurious emissions are required to be 20dBc.

RESULTS

9.6.1. BLE (500 kbps)

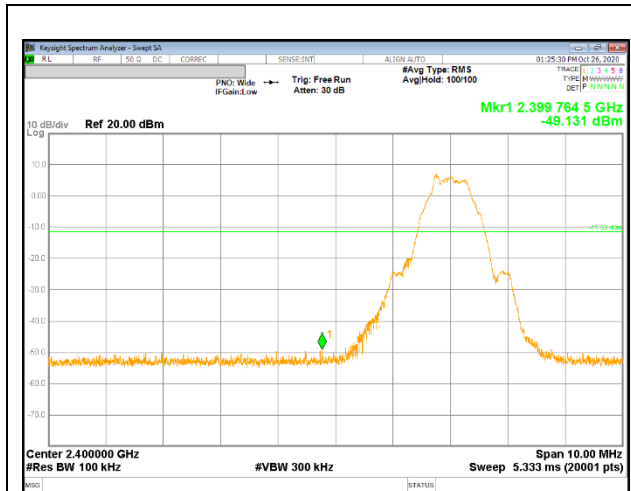


LOW CHANNEL BANDEDGE

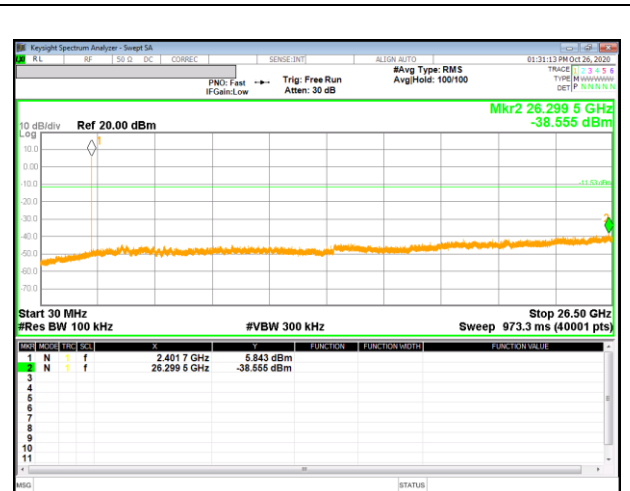


OUT-OF-BAND LOW CHANNEL




IN-BAND REFERENCE LEVEL

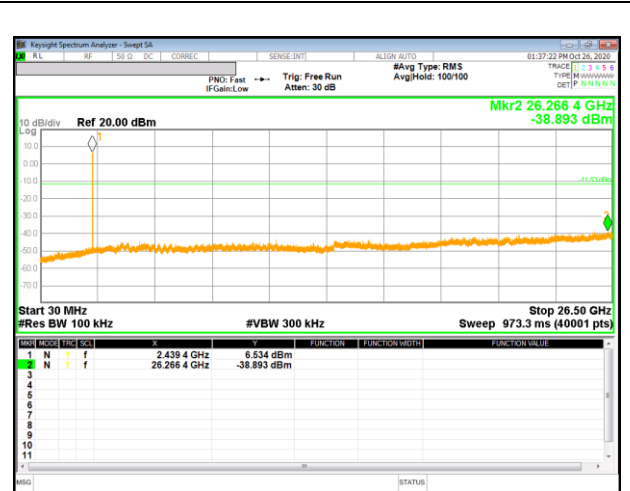

OUT-OF-BAND MID CHANNEL

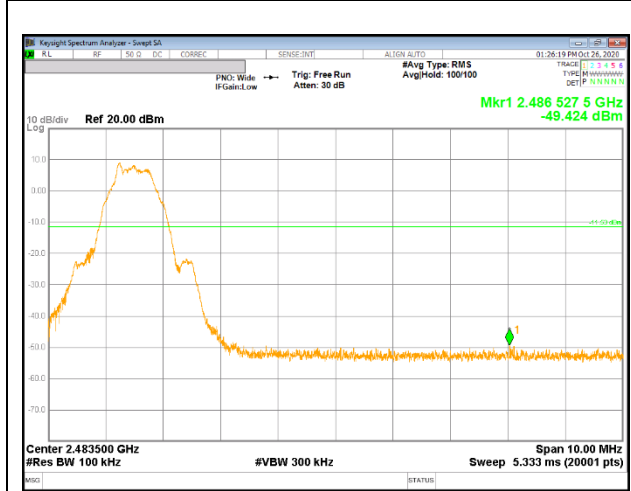


HIGH CHANNEL BANDEDGE

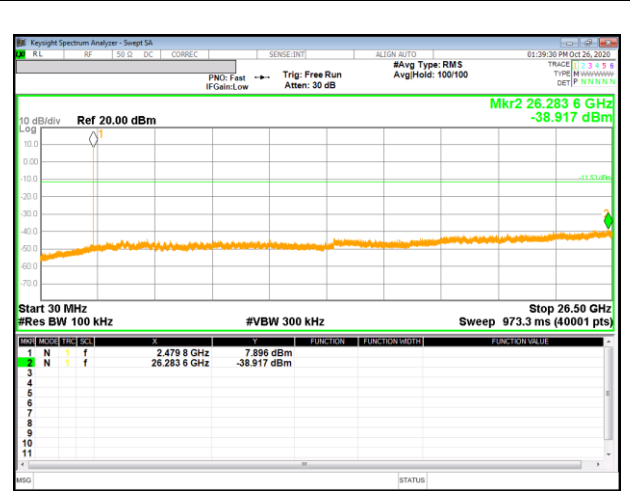


OUT-OF-BAND HIGH CHANNEL

9.6.2. BLE (2 Mbps)

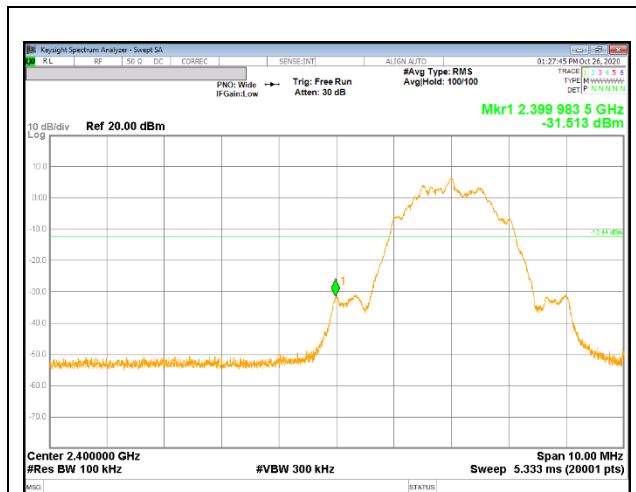


LOW CHANNEL BANDEDGE

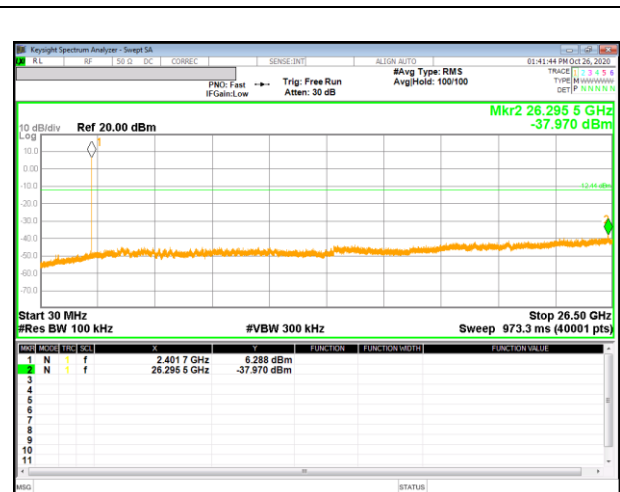


OUT-OF-BAND LOW CHANNEL




IN-BAND REFERENCE LEVEL

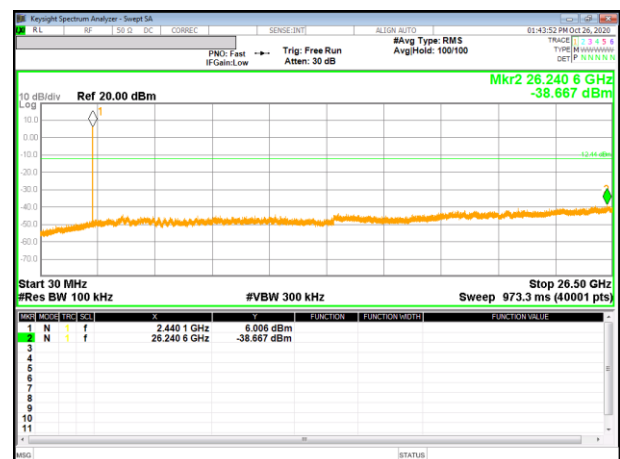

OUT-OF-BAND MID CHANNEL

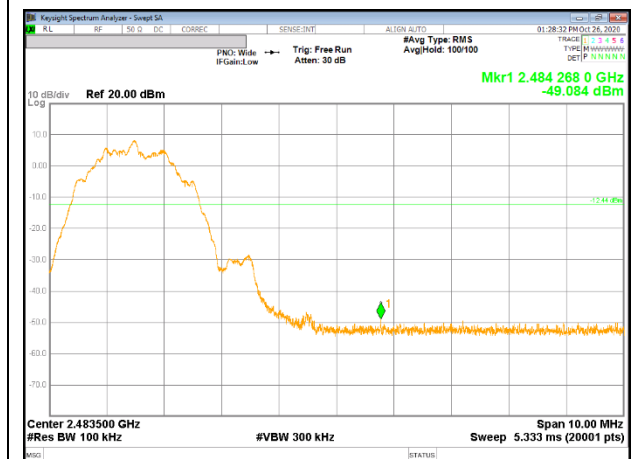

HIGH CHANNEL BANDEDGE

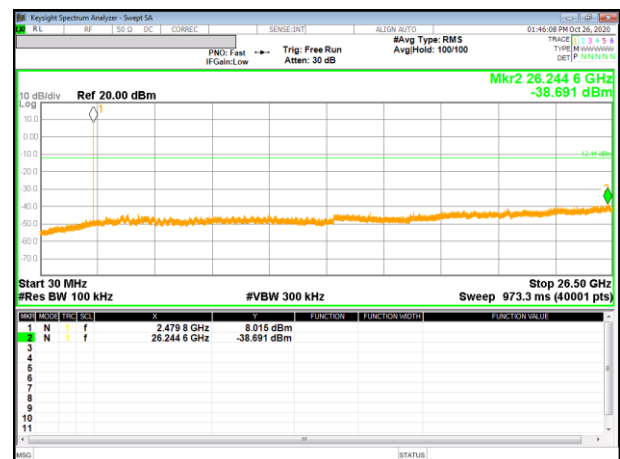

OUT-OF-BAND HIGH CHANNEL

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. (Restricted band-edge, Final detection of spurious harmonic emissions) Duty cycle factor = $10 \log(1/x)$. For this sample: For 500 kbps, DCF = $10 \log(1/0.56)=2.49$ dB (Spectrum Analyzer round it up to 2.49 dB) and for 2Mbps, DCF = $10 \log(1/0.31)=5.10$ dB (Spectrum Analyzer round it up to 5.10 dB)

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

The spectrum from 1 GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.


Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open are test site.
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. BLE (500 kbps)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

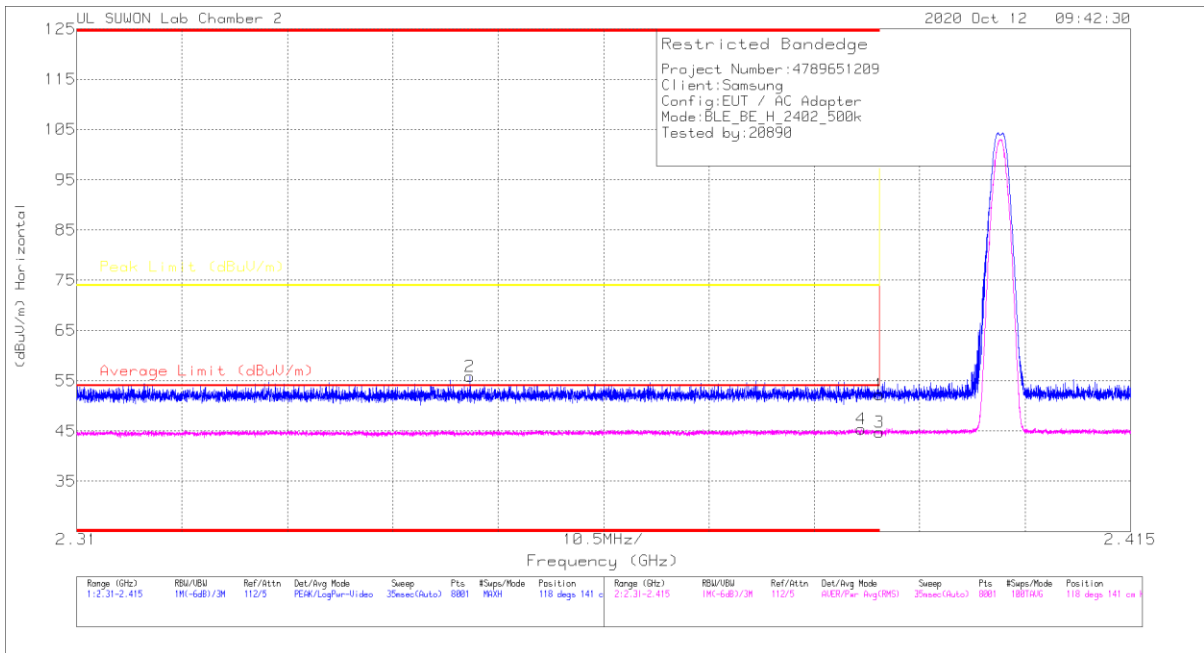


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.67	Pk	31.9	-20.3	0	52.27	-	-	74	-21.73	118	141	H
2	* 2.34919	44.61	Pk	31.8	-20.5	0	55.91	-	-	74	-18.09	118	141	H
3	* 2.39	30.67	RMS	31.9	-20.3	2.49	44.76	54	-9.24	-	-	118	141	H
4	* 2.3882	31.24	RMS	31.9	-20.2	2.49	45.43	54	-8.57	-	-	118	141	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

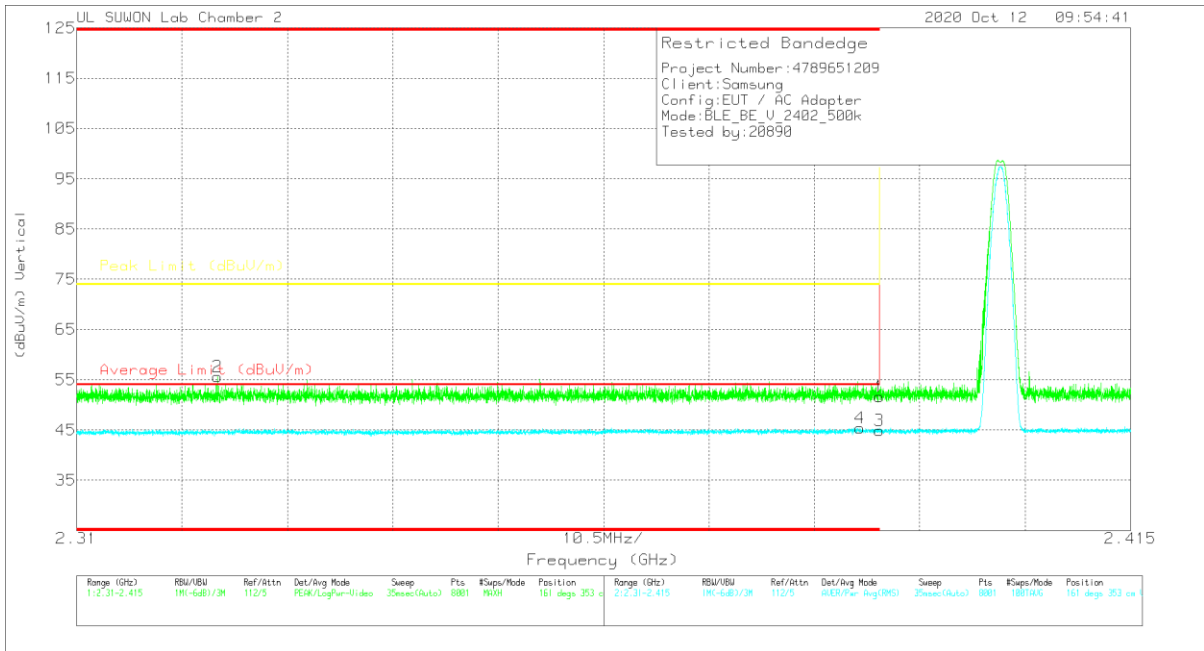


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	DC Cor (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.03	Pk	31.9	-20.3	0	51.63	-	-	74	-22.37	161	353	V
2	* 2.324	44.26	PK	31.8	-20.5	0	55.56	-	-	74	-18.44	161	353	V
3	* 2.39	30.8	RMS	31.9	-20.3	2.49	44.89	54	-9.11	-	-	161	353	V
4	* 2.38803	31.21	RMS	31.9	-20.2	2.49	45.4	54	-8.6	-	-	161	353	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

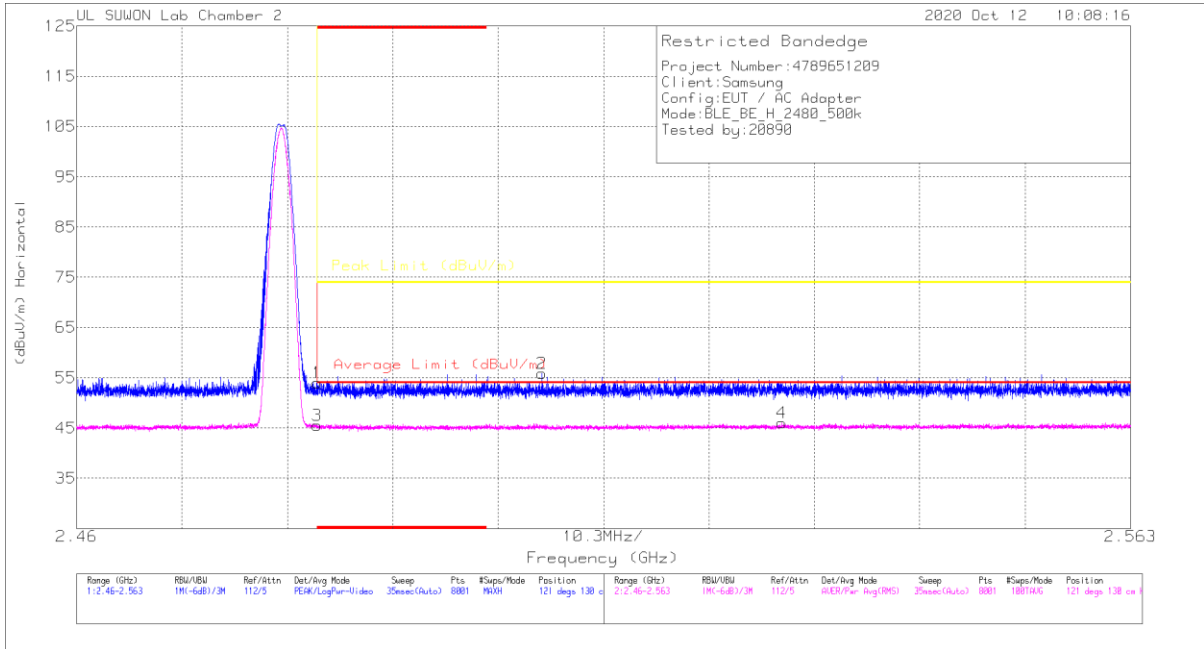


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	DC Cor (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.18	Pk	32	-20.2	0	53.98	-	-	74	-20.02	121	130	H
2	2.50546	43.82	Pk	32.1	-20.1	0	55.82	-	-	74	-18.18	121	130	H
3	* 2.48351	31.18	RMS	32	-20.2	2.49	45.47	54	-8.53	-	-	121	130	H
4	2.52892	31.41	RMS	32.1	-20	2.49	46	54	-8	-	-	121	130	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

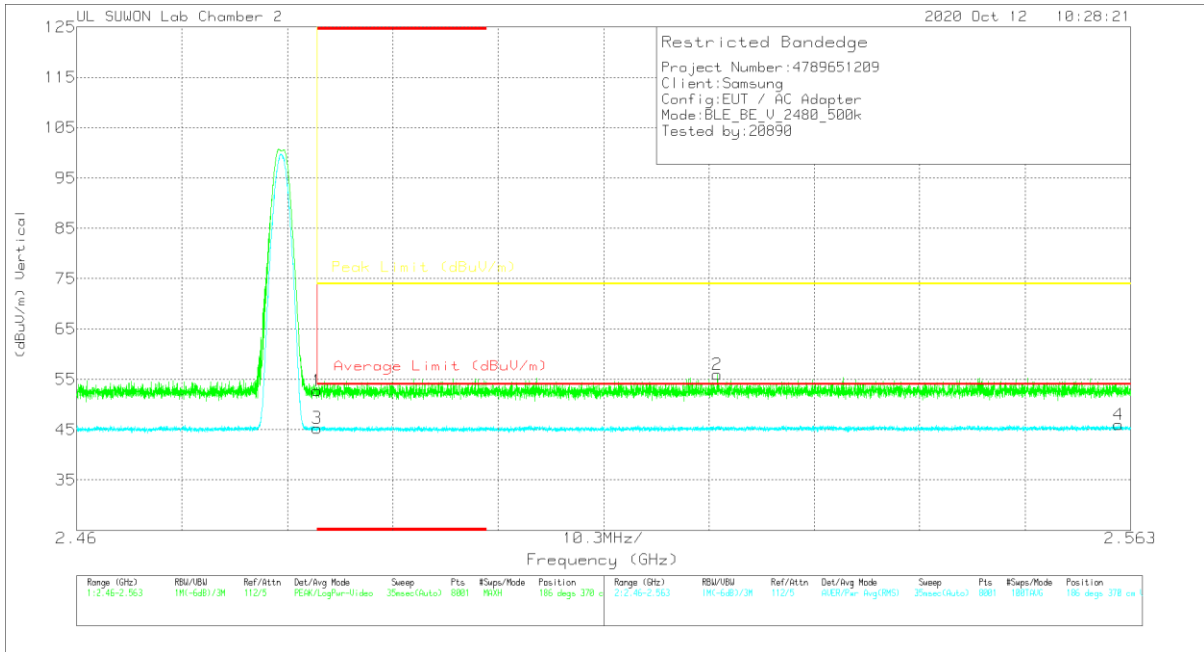


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBu/m)	Det	3117.00168724	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBu/m)	Average Limit (dBu/m)	Margin (dB)	Peak Limit (dBu/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	40.9	Pk	32	-20.2	0	52.7	-	-	74	-21.3	186	370	V
2	2.52262	44.01	Pk	32.1	-20.1	0	56.01	-	-	74	-17.99	186	370	V
3	* 2.48351	31.04	RMS	32	-20.2	2.49	45.33	54	-8.67	-	-	186	370	V
4	2.56183	31.31	RMS	32.2	-20	2.49	46	54	-8	-	-	186	370	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS LOW CHANNEL RESULTS

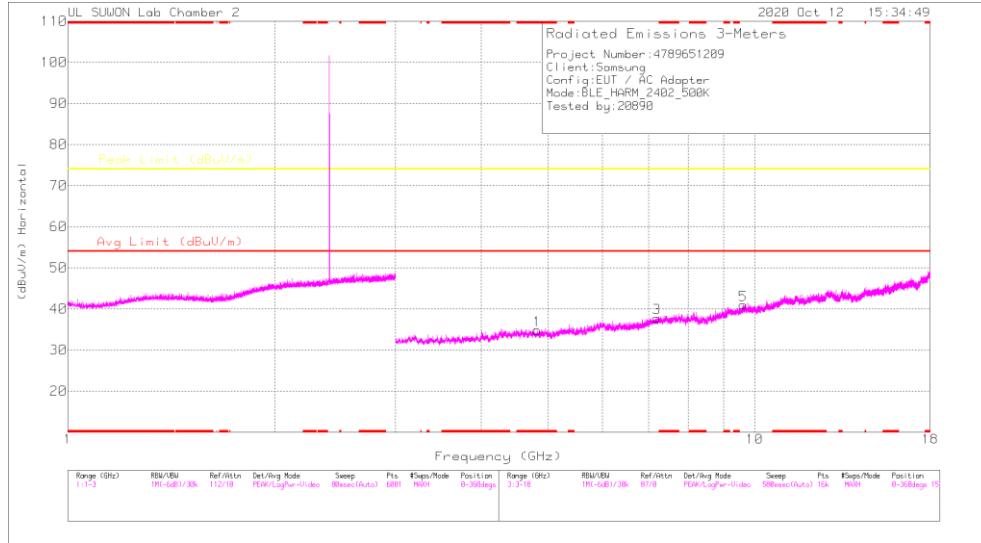

HORIZONTAL

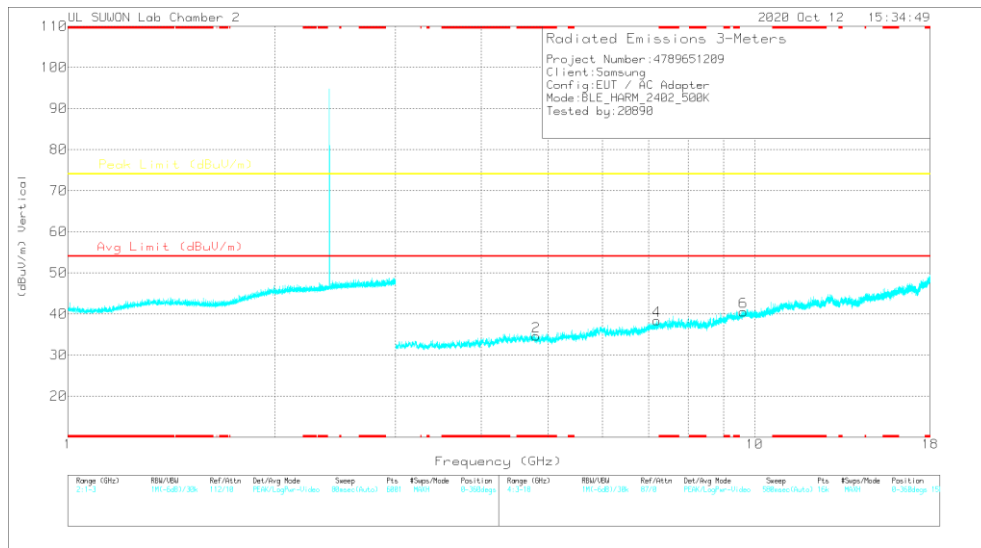


VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.82588	36.91	PK2	34.1	-27.8	0	43.21	-	-	74	-30.79	360	100	H
* 4.82545	37.24	PK2	34.1	-27.8	0	43.54	-	-	74	-30.46	360	100	V
7.2058	34.83	PK2	36.2	-25	0	46.03	-	-	74	-27.97	360	100	H
7.20419	35	PK2	36.2	-25	0	46.2	-	-	74	-27.8	360	100	V
9.61759	32.72	PK2	37	-20.8	0	48.92	-	-	74	-25.08	360	100	H
9.61763	32.7	PK2	37	-20.8	0	48.9	-	-	74	-25.1	360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak

MID CHANNEL RESULTS

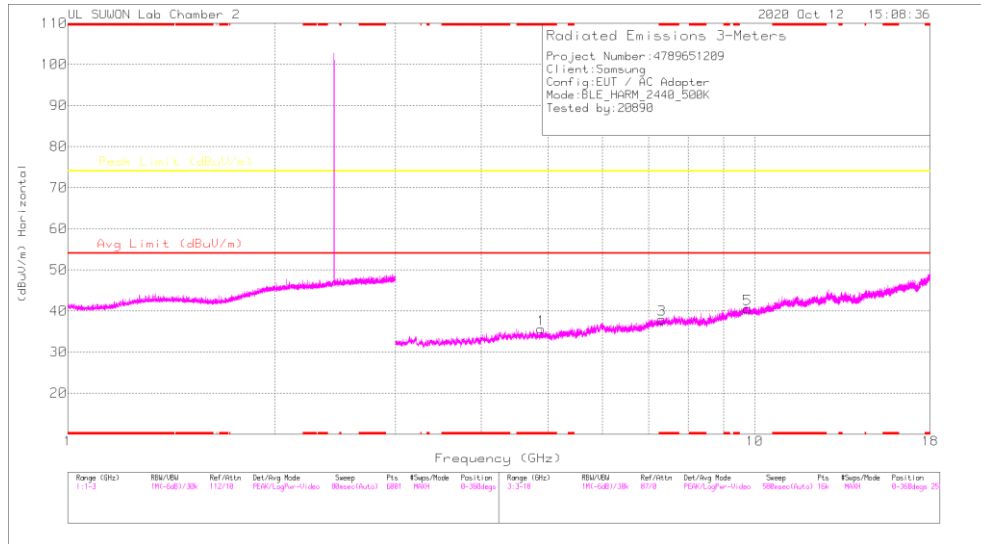

HORIZONTAL

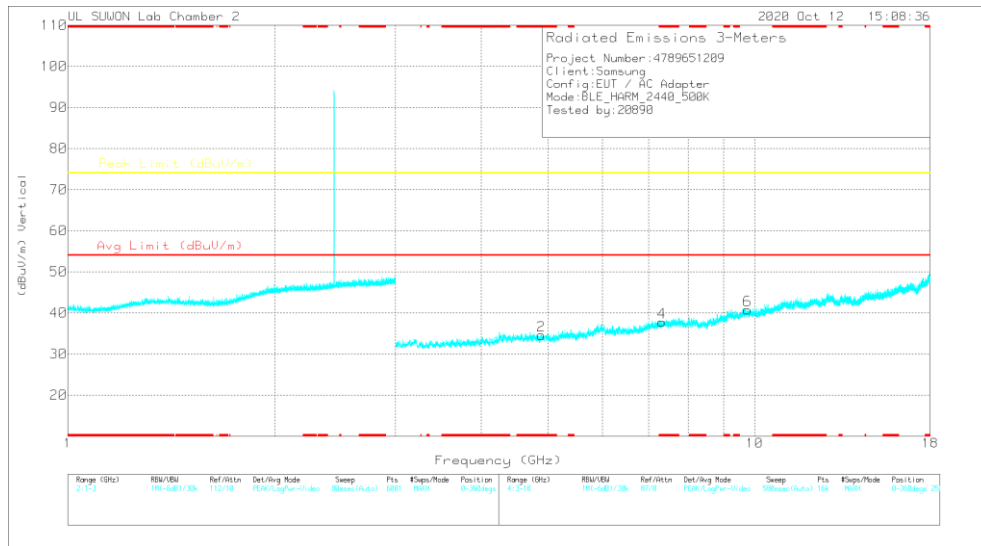


VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	3GHz_HPI[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.88524	36.66	PK2	34.1	-27.5	0	43.26	-	-	74	-30.74	360	100	H
* 4.88592	36.61	PK2	34.1	-27.5	0	43.21	-	-	74	-30.79	360	100	V
* 7.32199	35.25	PK2	36.1	-24.6	0	46.75	-	-	74	-27.25	360	100	H
* 7.32089	35.27	PK2	36.1	-24.6	0	46.77	-	-	74	-27.23	360	100	V
9.75938	33.23	PK2	37.2	-20.4	0	50.03	-	-	74	-23.97	360	100	H
9.75916	32.42	PK2	37.2	-20.5	0	49.12	-	-	74	-24.88	360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAV1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL RESULTS

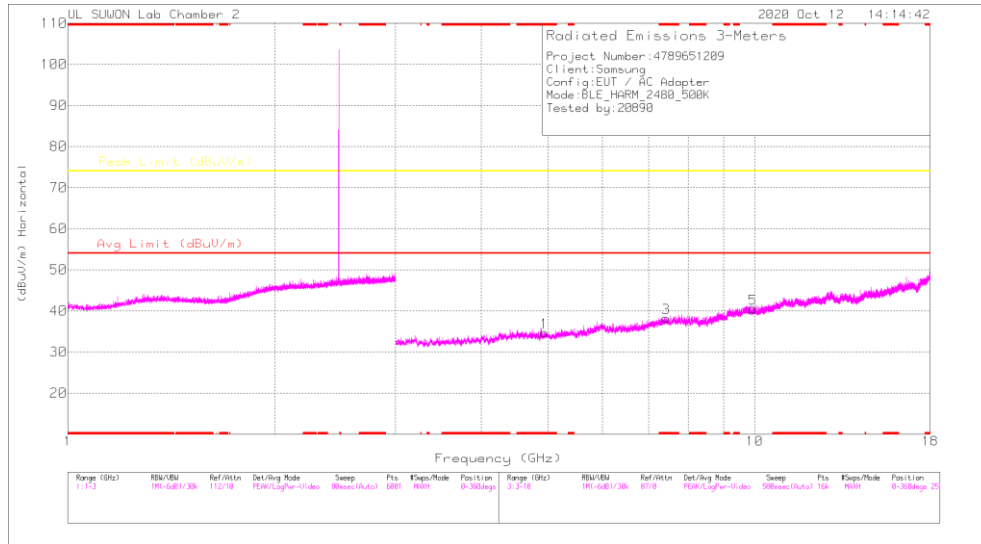

HORIZONTAL

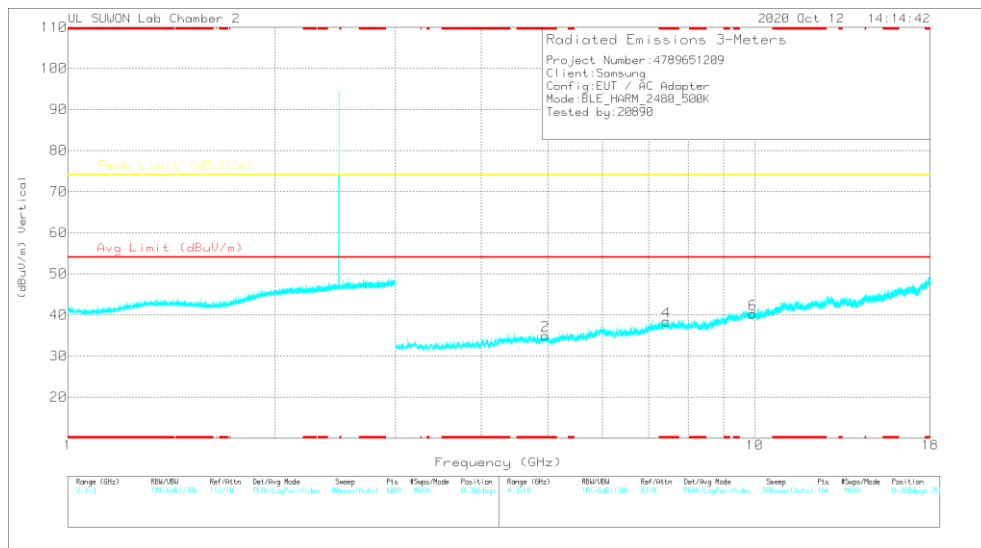

VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	3GHz_HPI[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.94046	35.99	PK2	34.1	-27	0	43.09	-	-	74	-30.91	360	100	H
* 4.94083	36.32	PK2	34.1	-26.9	0	43.52	-	-	74	-30.48	360	100	V
* 7.42587	34.49	PK2	36.1	-23.5	0	47.09	-	-	74	-26.91	360	100	H
* 7.42645	34.49	PK2	36.1	-23.5	0	47.09	-	-	74	-26.91	360	100	V
9.94316	31.92	PK2	37.4	-20	0	49.32	-	-	74	-24.68	360	100	H
9.94352	31.71	PK2	37.4	-20	0	49.11	-	-	74	-24.89	360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAV1 - KDB558074 Option 1 Maximum RMS Average

10.2.2. BLE (2 Mbps)

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

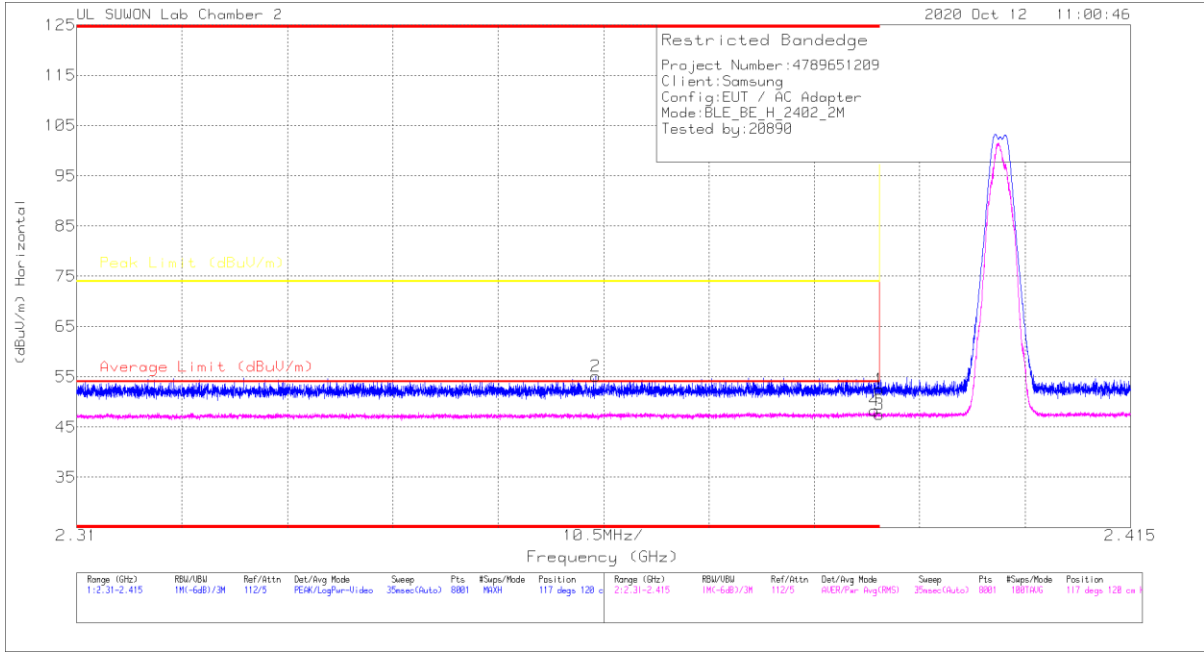

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.95	Pk	31.9	-20.3	0	52.55	-	-	74	-21.45	117	120	H
2	* 2.36171	43.82	Pk	31.8	-20.5	0	55.12	-	-	74	-18.88	117	120	H
3	* 2.39	30.87	RMS	31.9	-20.3	5.1	47.57	54	-6.43	-	-	117	120	H
4	* 2.3895	31.54	RMS	31.9	-20.3	5.1	48.24	54	-5.76	-	-	117	120	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT




Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.339	41.16	Pk	31.9	-20.3	0	52.76	-	-	74	-21.24	205	400	V
2	* 2.3875	43.38	Pk	31.9	-20.2	0	55.08	-	-	74	-18.92	205	400	V
3	* 2.39	30.68	RMS	31.9	-20.3	5.1	47.38	54	-6.62	-	-	205	400	V
4	* 2.36485	31.51	RMS	31.8	-20.3	5.1	48.11	54	-5.89	-	-	205	400	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

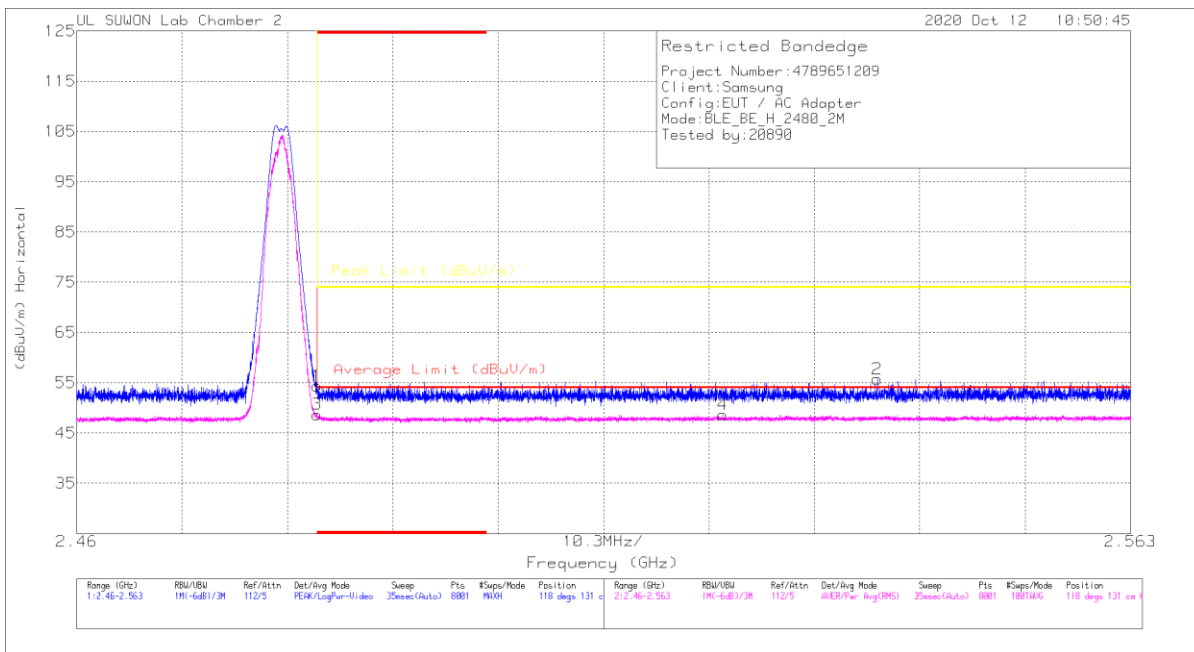


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	DC Cor (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	42.6	Pk	32	-20.2	0	54.4	-	-	74	-19.6	118	131	H
2	2.53824	43.78	Pk	32.1	-20.1	0	55.78	-	-	74	-18.22	118	131	H
3	* 2.48351	31.8	RMS	32	-20.2	5.1	48.7	54	-5.3	-	-	118	131	H
4	2.52316	31.51	RMS	32.1	-20.1	5.1	48.61	54	-5.39	-	-	118	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

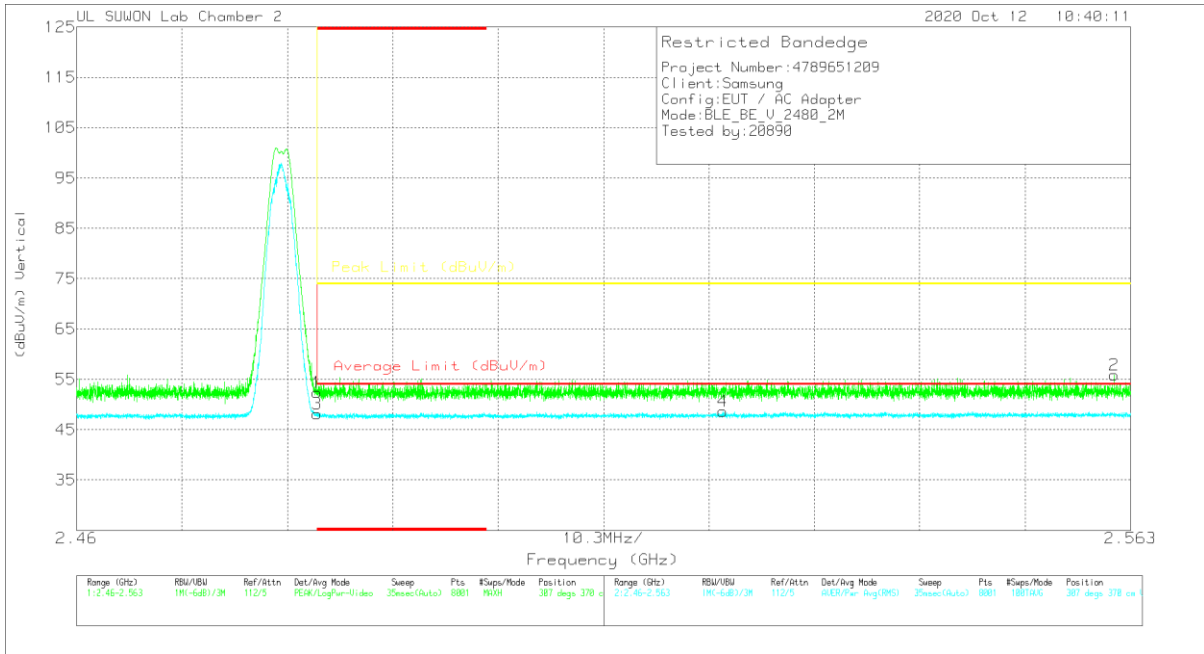


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB_ATT[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	40.63	Pk	32	-20.2	0	52.43	-	-	74	-21.57	307	370	V
2	2.56139	43.71	Pk	32.2	-20	0	55.91	-	-	74	-18.09	307	370	V
3	* 2.48351	31.22	RMS	32	-20.2	5.1	48.12	54	-5.88	-	-	307	370	V
4	2.52318	31.59	RMS	32.1	-20.1	5.1	48.69	54	-5.31	-	-	307	370	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS LOW CHANNEL RESULTS

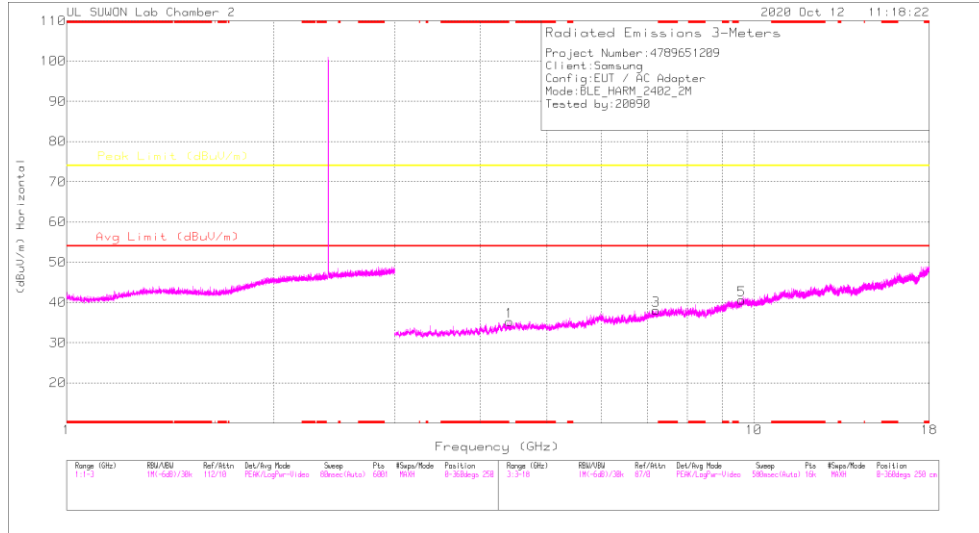

HORIZONTAL

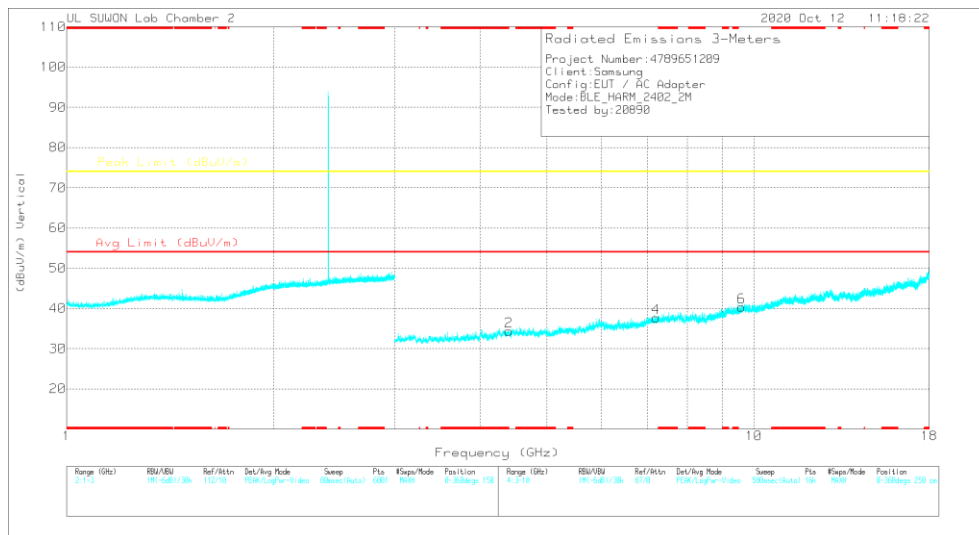


VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	3GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4.40893	37.02	PK2	33.8	-28	0	42.82	-	-	74	-31.18	360	100	H
4.40998	36.99	PK2	33.8	-28	0	42.79	-	-	74	-31.21	360	100	V
7.2023	35.62	PK2	36.2	-25	0	46.82	-	-	74	-27.18	360	100	H
7.20111	34.94	PK2	36.2	-25.1	0	46.04	-	-	74	-27.96	360	100	V
9.60514	32.71	PK2	37	-20.9	0	48.81	-	-	74	-25.19	360	100	H
9.60863	32.63	PK2	37	-20.8	0	48.83	-	-	74	-25.17	360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak

MID CHANNEL RESULTS

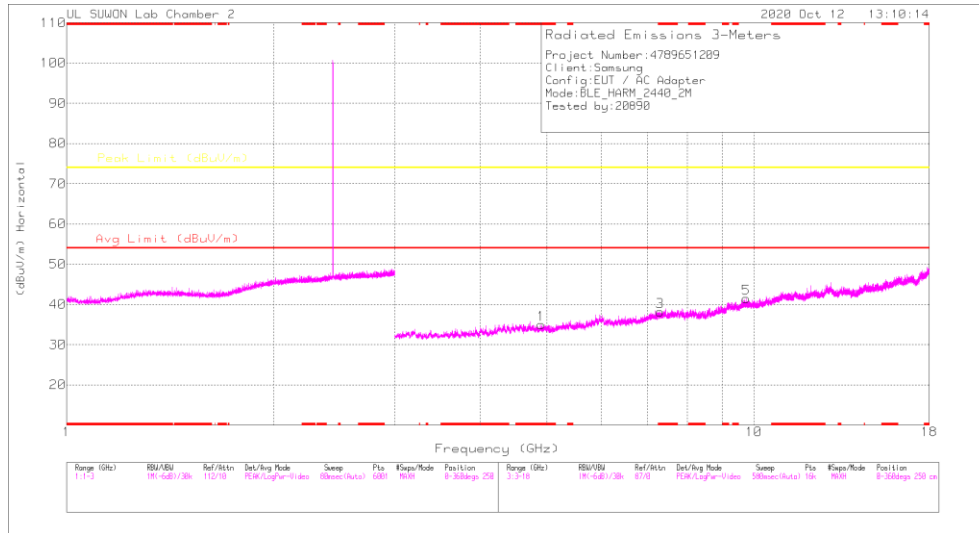

HORIZONTAL

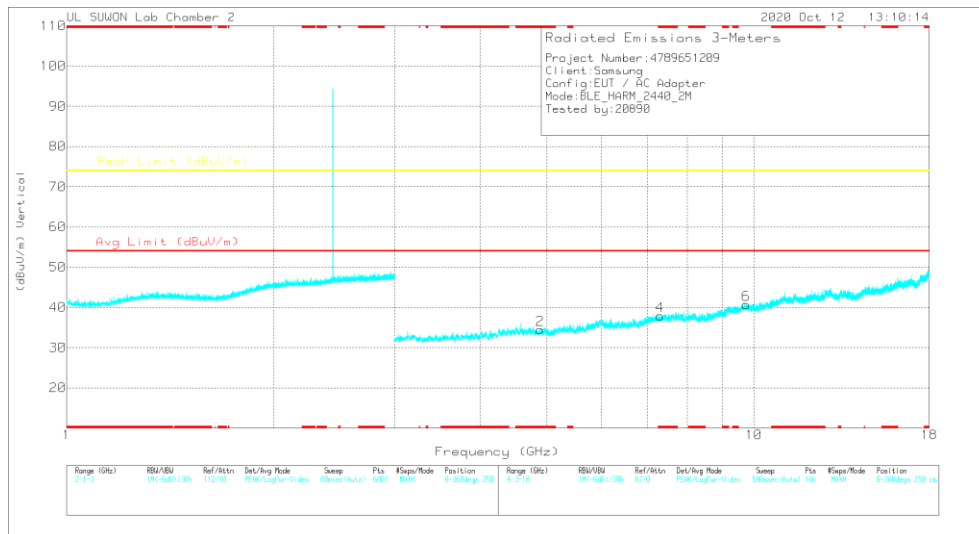


VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	3GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.90345	36.26	PK2	34.1	-27.2	0	43.16	-	-	74	-30.84	360	100	H
* 4.90214	36.11	PK2	34.1	-27.1	0	43.11	-	-	74	-30.89	360	100	V
* 7.30358	35.36	PK2	36.2	-24.7	0	46.86	-	-	74	-27.14	360	100	H
* 7.30414	35.21	PK2	36.2	-24.7	0	46.71	-	-	74	-27.29	360	100	V
9.7551	32.42	PK2	37.2	-20.4	0	49.22	-	-	74	-24.78	360	100	H
9.75523	32.36	PK2	37.2	-20.4	0	49.16	-	-	74	-24.84	360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak

HIGH CHANNEL RESULTS

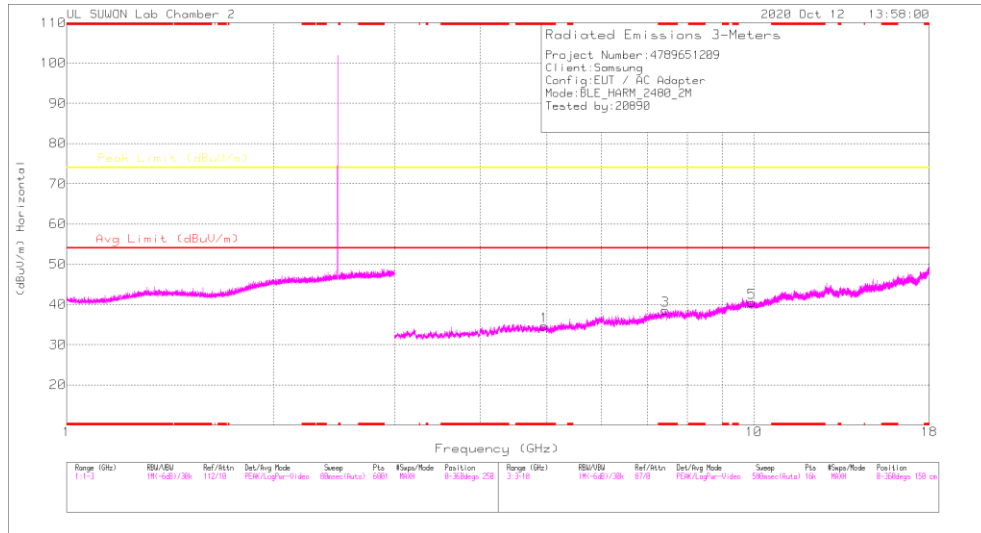

HORIZONTAL

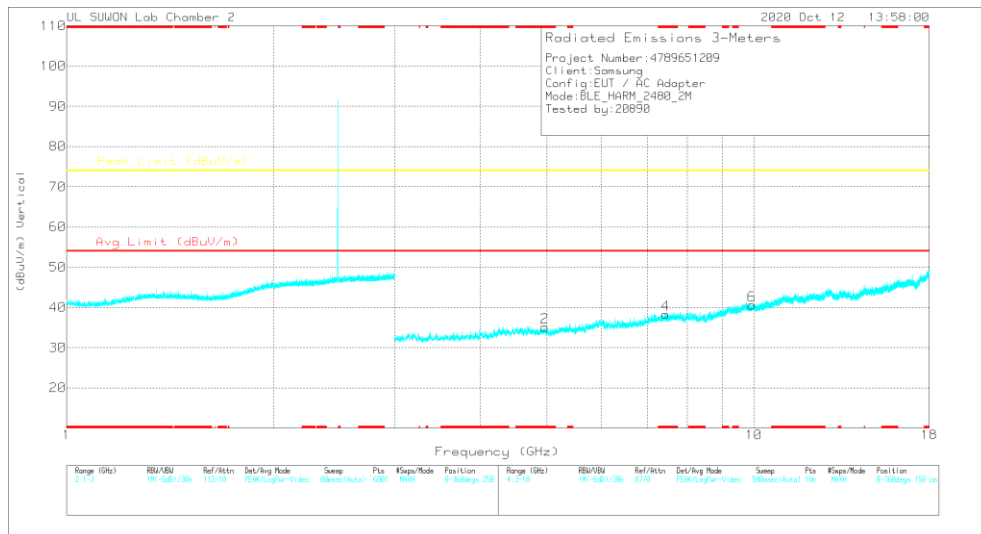

VERTICAL


RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.9557	36.06	PK2	34.1	-26.9	0	43.26	-	-	74	-30.74	360	100	H
* 4.9589	36.07	PK2	34.1	-26.8	0	43.37	-	-	74	-30.63	360	100	V
* 7.43428	34.28	PK2	36	-23.5	0	46.78	-	-	74	-27.22	360	100	H
* 7.43294	34.13	PK2	36	-23.5	0	46.63	-	-	74	-27.37	360	100	V
9.94175	31.32	PK2	37.4	-19.9	0	48.82	-	-	74	-25.18	360	100	H
9.94039	31.6	PK2	37.4	-20	0	49	-	-	74	-25	360	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak

10.3. WORST CASE BELOW 1 GHZ

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

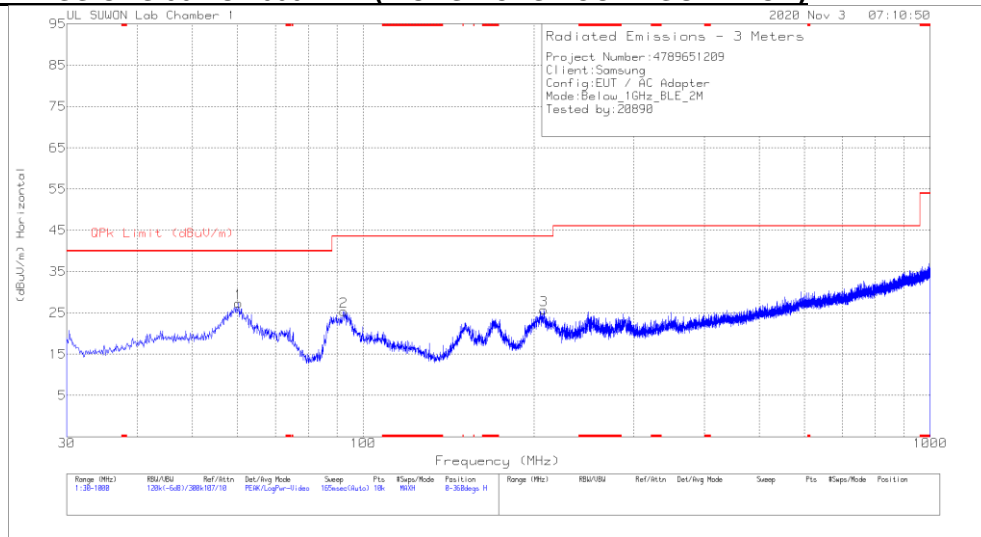

HORIZONTAL

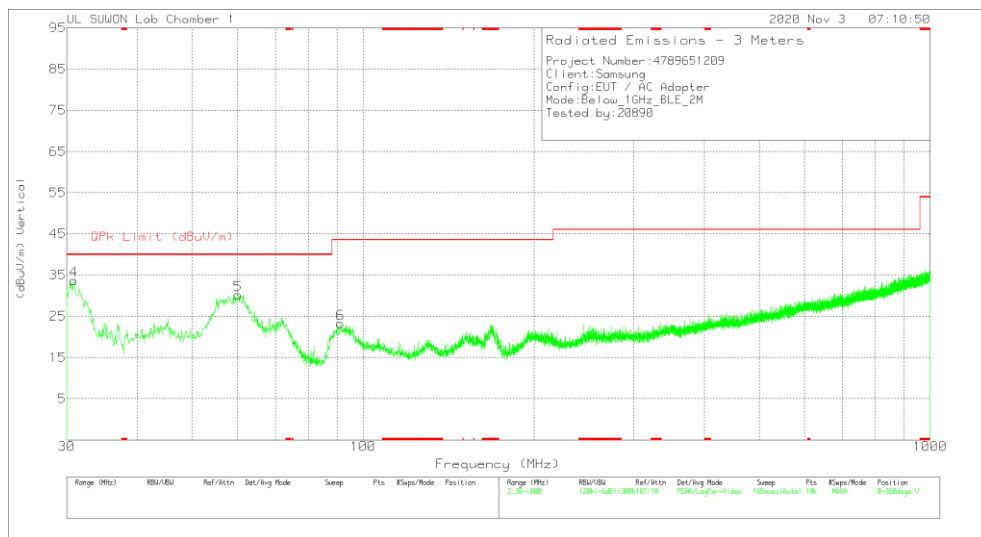

VERTICAL

Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_750	Below_1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	60.264	39.27	Pk	18.5	-30.4	27.37	40	-12.63	0-360	400	H
2	92.371	38.9	Pk	16.1	-29.6	25.4	43.52	-18.12	0-360	300	H
3	208.189	37.54	Pk	16.6	-28.4	25.74	43.52	-17.78	0-360	100	H
4	30.873	49.06	Pk	15.7	-31	33.76	40	-6.24	0-360	100	V
5	60.167	41.88	Pk	18.6	-30.3	30.18	40	-9.82	0-360	100	V
6	91.207	37.2	Pk	16	-29.9	23.3	43.52	-20.22	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8


Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

RESULTS

11.1.1. AC Power Line

LINE 1 RESULTS

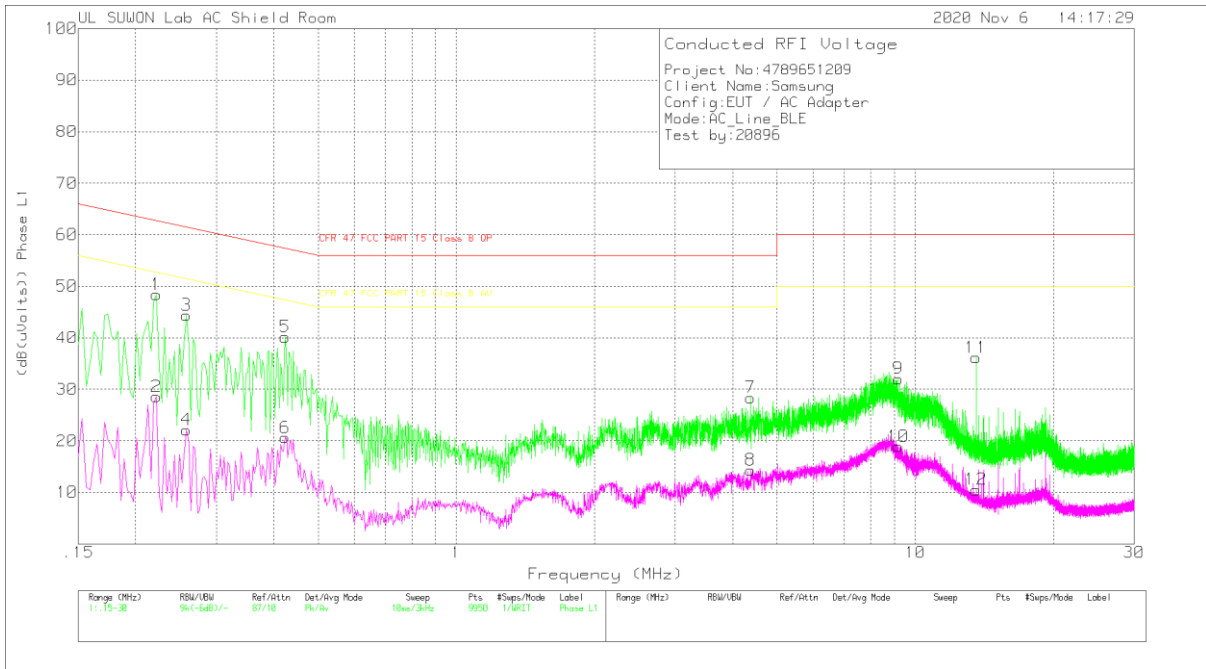

Trace Markers


Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.222	38.4	Pk	9.8	.2	48.4	62.74	-14.34	-	-
2	.222	18.56	Av	9.8	.2	28.56	-	-	52.74	-24.18
3	.258	34.48	Pk	9.7	.2	44.38	61.5	-17.12	-	-
4	.258	12.24	Av	9.7	.2	22.14	-	-	51.5	-29.36
5	.423	30.06	Pk	9.9	.2	40.16	57.39	-17.23	-	-
6	.423	10.53	Av	9.9	.2	20.63	-	-	47.39	-26.76
7	4.371	18.3	Pk	9.8	.3	28.4	56	-27.6	-	-
8	4.371	4.22	Av	9.8	.3	14.32	-	-	46	-31.68
9	9.177	21.77	Pk	9.9	.4	32.07	60	-27.93	-	-
10	9.186	8.6	Av	9.9	.4	18.9	-	-	50	-31.1
11	13.563	25.74	Pk	10	.4	36.14	60	-23.86	-	-
12	13.563	.14	Av	10	.4	10.54	-	-	50	-39.46

Pk - Peak detector

Av - Average detection

LINE 2 RESULTS

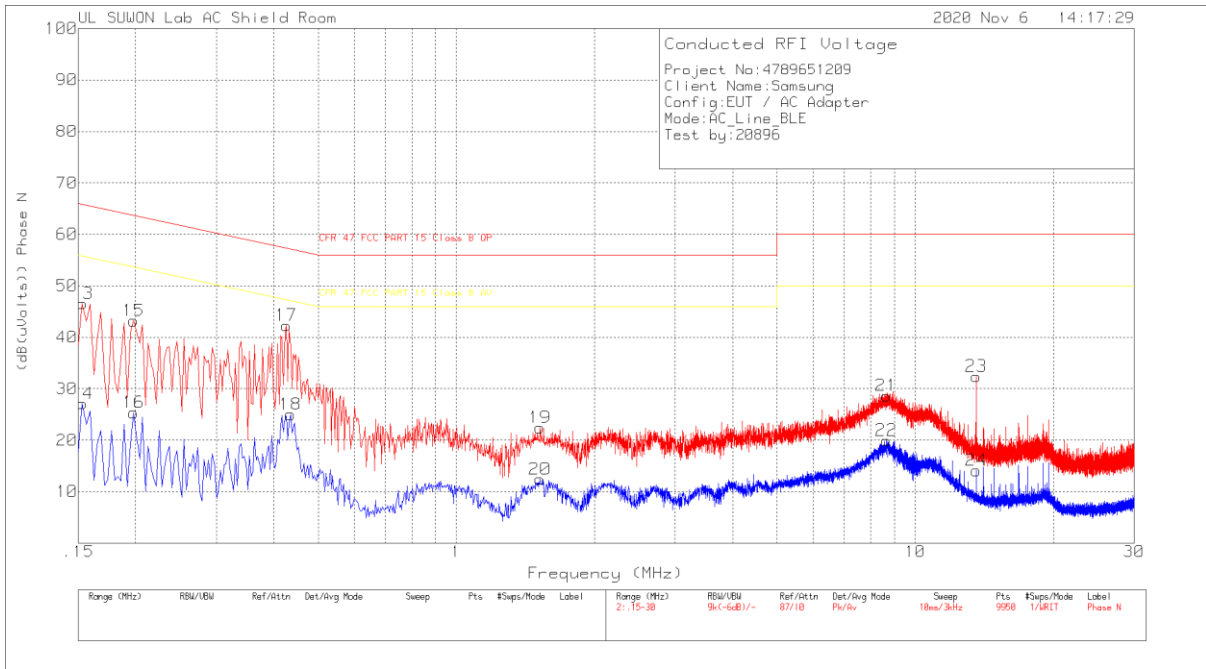

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.153	36.64	Pk	9.8	.1	46.54	65.84	-19.3	-	-
14	.153	17.2	Av	9.8	.1	27.1	-	-	55.84	-28.74
15	.198	33.12	Pk	9.9	.2	43.22	63.69	-20.47	-	-
16	.198	15.25	Av	9.9	.2	25.35	-	-	53.69	-28.34
17	.426	32.2	Pk	9.9	.2	42.3	57.33	-15.03	-	-
18	.435	14.89	Av	9.9	.2	24.99	-	-	47.16	-22.17
19	1.521	12.34	Pk	9.8	.3	22.44	56	-33.56	-	-
20	1.521	2.32	Av	9.8	.3	12.42	-	-	46	-33.58
21	8.649	18.45	Pk	9.9	.3	28.65	60	-31.35	-	-
22	8.649	9.75	Av	9.9	.3	19.95	-	-	50	-30.05
23	13.575	21.89	Pk	10.1	.4	32.39	60	-27.61	-	-
24	13.575	3.61	Av	10.1	.4	14.11	-	-	50	-35.89

Pk - Peak detector
 Av - Average detection

END OF TEST REPORT