



CERTIFICATION TEST REPORT

Report Number. : 4789651209-E6V1

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-G991B/DS, SM-G991B

FCC ID : A3LSMG991B

EUT Description : GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,
WPT and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E

Date Of Issue:

November 18, 2020

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



Testing Laboratory

TL-637

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	11/18/20	Initial issue	Hyunsik Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>7</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>7</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
4.4. <i>DECISION RULE.....</i>	<i>8</i>
5. EQUIPMENT UNDER TEST.....	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>13</i>
5.3. <i>List of test reduction and modes covering other modes:</i>	<i>14</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>15</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>18</i>
6. TEST AND MEASUREMENT EQUIPMENT	20
7. SUMMARY TABLE	21
8. MEASUREMENT METHODS	22
9. REFERENCE MEASUREMENTS RESULTS	23
9.1. <i>ON TIME AND DUTY CYCLE RESULTS.....</i>	<i>23</i>
9.2. <i>DUTY CYCLE PLOTS</i>	<i>24</i>
9.3. <i>26 dB BANDWIDTH.....</i>	<i>28</i>
9.3.1. <i>5.2 GHz BAND.....</i>	<i>29</i>
9.3.2. <i>5.3 GHz BAND.....</i>	<i>29</i>
9.3.3. <i>5.5 GHz BAND.....</i>	<i>30</i>
9.3.4. <i>STRADDLE CHANNEL.....</i>	<i>30</i>
9.3.5. <i>802.11ax 5.2 GHz BAND(RU).....</i>	<i>31</i>
9.3.6. <i>802.11ax 5.3 GHz BAND(RU).....</i>	<i>31</i>
9.3.7. <i>802.11ax 5.5 GHz BAND(RU).....</i>	<i>32</i>
9.3.8. <i>802.11ax STRADDLE CHANNEL(RU).....</i>	<i>32</i>
9.3.9. <i>26 dB BANDWIDTH PLOTS</i>	<i>33</i>
10. ANTENNA PORT TEST RESULTS.....	74
10.1. <i>6 dB BANDWIDTH</i>	<i>74</i>
10.1.1. <i>5.8 GHz BAND.....</i>	<i>75</i>

10.1.2.	802.11ax 5.8 GHz Band(RU)	75
10.1.3.	6 dB BANDWIDTH PLOTS	76
10.2.	OUTPUT POWER AND PPSD	83
10.2.1.	2Tx MODE IN THE 5.2 GHz BAND.....	84
10.2.2.	2Tx MODE IN THE 5.3 GHz BAND.....	86
10.2.3.	2Tx MODE IN THE 5.5 GHz BAND.....	88
10.2.4.	2Tx MODE IN THE 5.8 GHz BAND.....	90
10.2.5.	2Tx Mode Straddle channel IN THE 5.5 GHz BAND	91
10.2.6.	2Tx Mode Straddle channel IN THE 5.8 GHz BAND	92
10.2.7.	802.11ax 2Tx (MIMO) MODE 5.2 GHz BAND	93
10.2.8.	802.11ax 2Tx (MIMO) MODE 5.3 GHz BAND	97
10.2.9.	802.11ax 2Tx (MIMO) MODE 5.5 GHz BAND	101
10.2.10.	802.11ax 2Tx (MIMO) MODE STRADDLE CHANNEL	106
10.2.11.	802.11ax 2Tx (MIMO) MODE 5.8 GHz BAND	108
10.2.12.	OUTPUT POWER AND PPSD PLOTS	112
11.	TRANSMITTER ABOVE 1 GHz.....	170
11.1.	5.2 GHz.....	173
11.1.1.	TX ABOVE 1GHz 802.11a 2Tx MODE IN THE 5.2GHz BAND	173
11.1.2.	TX ABOVE 1GHz 802.11n HT20 2Tx MODE IN THE 5.2GHz BAND	178
11.1.3.	TX ABOVE 1GHz 802.11n HT40 2Tx MODE IN THE 5.2GHz BAND	183
11.1.4.	TX ABOVE 1GHz 802.11ac VHT80 2Tx MODE IN THE 5.2GHz BAND	187
11.2.	5.3 GHz.....	190
11.2.1.	TX ABOVE 1 GHz 802.11a 2Tx MODE IN THE 5.3 GHz BAND	190
11.2.2.	TX ABOVE 1GHz 802.11n HT20 2Tx MODE IN THE 5.3GHz BAND	195
11.2.3.	TX ABOVE 1GHz 802.11n HT40 2Tx MODE IN THE 5.3GHz BAND	200
11.2.4.	TX ABOVE 1GHz 802.11ac VHT80 2Tx MODE IN THE 5.3GHz BAND	204
11.3.	5.5-5.6 GHz.....	207
11.3.1.	TX ABOVE 1 GHz 802.11a 2Tx MODE IN THE 5.5 GHz BAND	207
11.3.2.	TX ABOVE 1GHz 802.11n HT20 2Tx MODE IN THE 5.5GHz BAND	214
11.3.3.	TX ABOVE 1GHz 802.11n HT40 2Tx MODE IN THE 5.5GHz BAND	221
11.3.4.	TX ABOVE 1GHz 802.11ac VHT80 2Tx MODE IN THE 5.5GHz BAND	228
11.4.	5.8 GHz.....	234
11.4.1.	TX ABOVE 1GHz 802.11a 2Tx MODE IN THE 5.8GHz BAND	234
11.4.2.	TX ABOVE 1GHz 802.11n HT20 2Tx MODE IN THE 5.8GHz BAND	241
11.4.3.	TX ABOVE 1GHz 802.11n HT40 2Tx MODE IN THE 5.8GHz BAND	248
11.4.4.	TX ABOVE 1GHz 802.11ac VHT80 2Tx MODE IN THE 5.8GHz BAND	254
11.5.	5.2 GHz(802.11ax RU mode).....	259
11.5.1.	TX ABOVE 1GHz HE20(RU) 2Tx MODE IN THE 5.2GHz BAND	259
11.5.2.	TX ABOVE 1GHz HE40(RU) 2Tx MODE IN THE 5.2GHz BAND	262
11.5.3.	TX ABOVE 1GHz HE80(RU) 2Tx MODE IN THE 5.2GHz BAND	264
11.6.	5.3 GHz(802.11ax RU mode).....	265
11.6.1.	TX ABOVE 1 GHz HE20(RU) 2Tx MODE IN THE 5.3 GHz BAND	265
11.6.2.	TX ABOVE 1GHz HE40(RU) 2Tx MODE IN THE 5.3GHz BAND	268
11.6.3.	TX ABOVE 1GHz HE80(RU) 2Tx MODE IN THE 5.3GHz BAND	270

11.7.	5.5-5.6 GHz(802.11ax RU mode)	271
11.7.1.	TX ABOVE 1 GHz HE20(RU) 2Tx MODE IN THE 5.5 GHz BAND	271
11.7.2.	TX ABOVE 1GHz HE40(RU) 2Tx MODE IN THE 5.5GHz BAND	274
11.7.3.	TX ABOVE 1GHz HE80(RU) 2Tx MODE IN THE 5.5GHz BAND	277
11.8.	5.8 GHz(802.11ax RU mode)	279
11.8.1.	TX ABOVE 1GHz HE20(RU) 2Tx MODE IN THE 5.8GHz BAND	279
11.8.2.	TX ABOVE 1GHz HE40(RU) 2Tx MODE IN THE 5.8GHz BAND	282
11.8.3.	TX ABOVE 1GHz HE80(RU) 2Tx MODE IN THE 5.8GHz BAND	284
11.9.	Spurious Emissions for Simultaneous Transmission	285
11.9.1.	Worst test case RSDB condition	285
11.9.2.	Worst test case non-DBS + Bluetooth condition	285
11.9.3.	Test Results	286
12.	WORST-CASE BELOW 1 GHz	292
13.	AC POWER LINE CONDUCTED EMISSIONS	293
14.	DYNAMIC FREQUENCY SELECTION	296
14.1.	OVERVIEW	296
14.1.1.	LIMITS	296
14.1.2.	TEST AND MEASUREMENT SYSTEM	300
14.1.3.	SETUP OF EUT	303
14.1.4.	DESCRIPTION OF EUT	304
14.1.	RESULTS FOR 80 MHz BANDWIDTH (UNII-2A BAND)	305
14.1.1.	TEST CHANNEL	305
14.1.2.	RADAR WAVEFORM AND TRAFFIC	305
14.1.3.	OVERLAPPING CHANNEL TESTS	306
14.1.4.	MOVE AND CLOSING TIME	306
14.2.	RESULTS FOR 80 MHz BANDWIDTH (UNII-2C BAND)	309
14.2.1.	TEST CHANNEL	309
14.2.2.	RADAR WAVEFORM AND TRAFFIC	309
14.2.3.	OVERLAPPING CHANNEL TESTS	310
14.2.4.	MOVE AND CLOSING TIME	310

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, WPT and NFC

MODEL NUMBER: SM-G991B/DS, SM-G991B

SERIAL NUMBER: 47d1a444d81f7ece, R3CN80HSZ6E (CONDUCTED);
R3CN90P9ETY, R3CN90P9CQJ, R3CNA0F9GKJ, R3CNA0F9FVR (RADIATED);

DATE TESTED: SEP 28, 2020 – NOV 17, 2020;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Hyunsik Yun
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 789033 D02 General UNII Test Procedures New Rules v02r01
4. KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
5. KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02
6. KDB 662911 D01 v02r01
7. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.01 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.26 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.90 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.49 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, WPT and NFC. This test report addresses the NII (UNII 802.11a/n/ac/ax) operational mode.

This report covers the Samsung models SM-G991B/DS and SM-G991B. These models are identical in hardware except SM-G991B has single SIM tray. With some pre-scan, model SM-G991B/DS was set for final test.

Note. This EUT does not support channel puncturing.

WiFi operating mode

Frequency range	Mode	ANT1	ANT2
5GHz (5180 MHz ~ 5825 MHz)	802.11a MIMO	TX/RX	TX/RX
	802.11n MIMO	TX/RX	TX/RX
	802.11ac MIMO	TX/RX	TX/RX
	802.11ax MIMO	TX/RX	TX/RX

Simultaneous TX Condition

Simultaneous Tx Condition - RSDB

Mode	# of TX	5GHz WLAN		2.4GHz WLAN		Test Case
		ANT1	ANT2	ANT1	ANT2	
2.4GHz + 5GHz RSDB MIMO	4	0	0	0	0	0

Simultaneous Tx Condition - 5 GHz MIMO + Bluetooth

Mode	# of TX	5GHz WLAN		2.4GHz Bluetooth	2.4GHz WLAN	Test Case
		ANT1	ANT2	ANT1	ANT2	
5GHz MIMO & Bluetooth	3	0	0	0	-	-

Test RU offset for tones in each modes

Mode	Tones	RU offset
HE20	26T	0
		4
		8
	52T	37
		38
40		
106T	53	
242T / SU ^{Note 1}	54	
HE40	26T	61 / -
		0
		9
	52T	17
		37
		41
	106T	44
		53
		54
	242T	56
61		
62		
484T / SU ^{Note 1}	63 / -	
HE80	26T	0
		18
		36
	52T	37
		45
		52
	106T	53
		57
		60
	242T	61
		62
		64
	484T	65
66		
996T / SU ^{Note 1}		67 / -

Note: Full RU(Resource Unit) 242T mode and SU(Single Unit) mode have no difference in physical waveform. This report has been reported the SU mode with highest output power in MIMO.

Band portion of RU allocation about straddle channels

Mode	Channel	Tones	RU offset	Portion
HE20	Straddle 5720 MHz	26T	6	UNII 2C & UNII 3
		242T / SU	61 / -	
HE40	Straddle 5710 MHz	26T	15	UNII 2C & UNII 3
		484T / SU	65 / -	
HE80	Straddle 5690 MHz	26T	34	UNII 2C & UNII 3
		996T / SU	67 / -	

Note: In case of RU straddle channel, test was performed overlapping RU position.

MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

UNII-1

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
5180 - 5240	802.11a MIMO	19.98	99.54
	802.11n(HT20) MIMO	19.97	99.31
	802.11ax(HE20) MIMO	15.45	35.08
5190 - 5230	802.11n(HT40) MIMO	18.93	78.16
	802.11ax(HE40) MIMO	13.18	20.80
5210	802.11ac(VHT80) MIMO	16.96	49.66
	802.11ax(HE80) MIMO	11.46	14.00

UNII-2A

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
5260 - 5320	802.11a MIMO	20.34	108.14
	802.11n(HT20) MIMO	20.32	107.65
	802.11ax(HE20) MIMO	15.18	32.96
5270 - 5310	802.11n(HT40) MIMO	18.49	70.63
	802.11ax(HE40) MIMO	13.79	23.93
5290	802.11ac(VHT80) MIMO	17.42	55.21
	802.11ax(HE80) MIMO	12.73	18.75

UNII-2C

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
5500 - 5720	802.11a MIMO	16.99	50.00
	802.11n(HT20) MIMO	17.06	50.82
	802.11ax(HE20) MIMO	15.06	32.06
5510 - 5710	802.11n(HT40) MIMO	18.28	67.30
	802.11ax(HE40) MIMO	13.45	22.13
5530 - 5690	802.11ac(VHT80) MIMO	17.96	62.52
	802.11ax(HE80) MIMO	11.97	15.74

UNII-3

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
5745 - 5825	802.11a MIMO	20.75	118.85
	802.11n(HT20) MIMO	20.75	118.85
	802.11ax(HE20) MIMO	15.14	32.66
5755 - 5795	802.11n(HT40) MIMO	18.08	64.27
	802.11ax(HE40) MIMO	13.61	22.96
5775	802.11ac(VHT80) MIMO	17.84	60.81
	802.11ax(HE80) MIMO	11.79	15.10

5.2. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
 Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes a internal antenna, with a maximum gain of:

Frequency Band [MHz]	ANT1 Gain [dBi]	ANT2 Gain [dBi]	Correlated Chains Directional Gain [dBi]
UNII 1 5150 - 5250	-5.69	-6.86	-3.25
UNII 2A 5250 - 5350	-5.01	-6.78	-2.84
UNII 2C 5470 - 5725	-5.85	-5.12	-2.47
UNII 3 5725 - 5850	-5.44	-5.62	-2.52

“WiFi 2nd” and “WiFi 1st” as indicated in antenna specification are written as ANT 1 and ANT 2 in this report.

5.3. List of test reduction and modes covering other modes:

The output power on covered modes is equal to or less than one referenced.

Authorized Frequency Band			
Mode	Antenna Stream	Mode	Covered by
802.11a	MIMO	802.11a 2TX	
802.11n HT20		802.11n HT20 2TX	
802.11ac VHT20		802.11ac VHT20 2TX	802.11n HT20 2TX
802.11ax HE20(SU)		802.11ax HE20 RU(242T) 2TX	802.11ax HE20 SU 2TX
802.11n HT40		802.11n HT40 2TX	
802.11ac VHT40		802.11ac VHT40 2TX	802.11n HT40 2TX
802.11ax HE40(SU)		802.11ax HE40 RU(484T) 2TX	802.11ax HE40 SU 2TX
802.11ac VHT80		802.11ac VHT80 2TX	
802.11ax HE80(SU)		802.11ax HE80 RU(996T) 2TX	802.11ax HE80 SU 2TX

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

For MIMO, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation

Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps 2Tx
802.11n HT20 mode: MCS0 2Tx
802.11n HT40 mode: MCS0 2Tx
802.11ac VHT80 mode: MCS0 2Tx

802.11ax HE20 mode: MCS0 2Tx
802.11ax HE40 mode: MCS0 2Tx
802.11ax HE80 mode: MCS0 2Tx

802.11a & n HT20 & n HT40 & ax HE20 & ax HE40 & ax HE80 mode only supports MIMO mode.

So radiation test for 802.11a / n HT20 & HT40 / ac VHT80 / ax HE20 & HE40 & HE80 were evaluated at MIMO mode.

Worst-case selection criteria for 802.11ax test items :

- For the 6dB Bandwidth, it was tested at the RU allocation with lowest tones number for each bandwidth.

Note : All radiated and power line conducted tests were performed connected with charger for evaluation of worst case mode.

Test case configuration for 802.11a, 802.11n HT20 & 40, 802.11ac VHT20 & 40 & 80, 802.11ax HE20 & 40 & 80 (SU) modes :

Mode	Band	SISO Target[dBm]				MIMO Target[dBm]			
		802.11a	802.11n	802.11ac	802.11ax (SU)	802.11a	802.11n	802.11ac	802.11ax (SU)
5GHz (20 MHz)	UNII-1					20	20	20	15
	UNII-2A					20	20	20	15
	UNII-2C					17	17	17	15
	UNII-3					20	20	20	15
5GHz (40 MHz)	UNII-1						18	18	13
	UNII-2A						18	18	13
	UNII-2C						18	18	13
	UNII-3						18	18	13
5GHz (80 MHz)	UNII-1							17	12
	UNII-2A							17	12
	UNII-2C							17	12
	UNII-3							17	12

Note1. This eut support only MIMO mode.

Note2. 802.11ac VHT20 & 802.11ac VHT40 mode are covered by 802.11n HT20 & 802.11n HT40.

Note3. 802.11ax HE20 & HE40 SU mode's target power(MIMO) is lower than 802.11n mode. Therefore, 802.11ax HE20 & HE40 SU mode is covered by 802.11n HT20 & HT40 mode.

Note4. 802.11ax HE80 SU mode's target power(MIMO) is lower than 802.11ac VHT80 mode. Therefore, 802.11ax HE80 SU mode is covered by 802.11ac VHT80 mode.

Test case configuration for 802.11ax HE20 & 40 & 80 (RU) modes :

802.11ax HE20 RU mode							802.11ax HE40 RU mode							
Band	Freq.	Tone	RU offset	Test Case			Band	Freq.	Tone	RU offset	Test Case			
				ANT1	ANT2	MIMO					ANT1	ANT2	MIMO	
UNII-1	5180	26T	0	-	-		UNII-1	5190	26T	0	-	-		
			4	-	-					9	-	-		
			8	-	-	O				17	-	-	O	
	5200		0	-	-			UNII-2A		5230	0	-	-	
			4	-	-	O					9	-	-	
			8	-	-						17	-	-	O
	5240		0	-	-			UNII-2C		5270	0	-	-	
			4	-	-						9	-	-	O
			8	-	-	O					17	-	-	
UNII-2A	5260	0	-	-		UNII-2C	5310	0	-	-				
		4	-	-				9	-	-	O			
		8	-	-	O			17	-	-				
	5300	0	-	-	O	UNII-3	5510	0	-	-				
		4	-	-				9	-	-	O			
		8	-	-				17	-	-				
	5320	0	-	-		UNII-3	5590	0	-	-				
		4	-	-	O			9	-	-	O			
		8	-	-				17	-	-				
UNII-2C	5500	0	-	-		UNII-3	5670	0	-	-				
		4	-	-	O			9	-	-				
		8	-	-				17	-	-	O			
	5580	0	-	-		UNII-3	5755	0	-	-				
		4	-	-	O			9	-	-	O			
		8	-	-				17	-	-				
	5700	0	-	-	O	UNII-3	5795	0	-	-				
		4	-	-				9	-	-	O			
		8	-	-				17	-	-				
UNII-3	5745	0	-	-		802.11ax HE80 RU mode								
		4	-	-	O	Band	Freq.	Tone	RU offset	Test Case				
		8	-	-						ANT1	ANT2	MIMO		
	5785	0	-	-		UNII-1	5210	26 T	0	-	-			
		4	-	-	O				18	-	-	O		
		8	-	-					36	-	-			
	5825	0	-	-		UNII-2A	5290		0	-	-			
		4	-	-	O				18	-	-			
		8	-	-					36	-	-	O		
UNII-2C	5530	0	-	-		UNII-2C	5610		0	-	-			
		18	-	-					18	-	-			
		36	-	-	O				36	-	-			
UNII-3	5775	0	-	-		UNII-3	5775	0	-	-				
		18	-	-				18	-	-				
		36	-	-	O			36	-	-	O			

Note5. Radiated spurious test was performed on the lower tone(26T) with worst average power.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37N8BT85J8SE3	N/A
Data Cable	SAMSUNG	EP-DN980BBE	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software exercised the EUT to enable NII mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

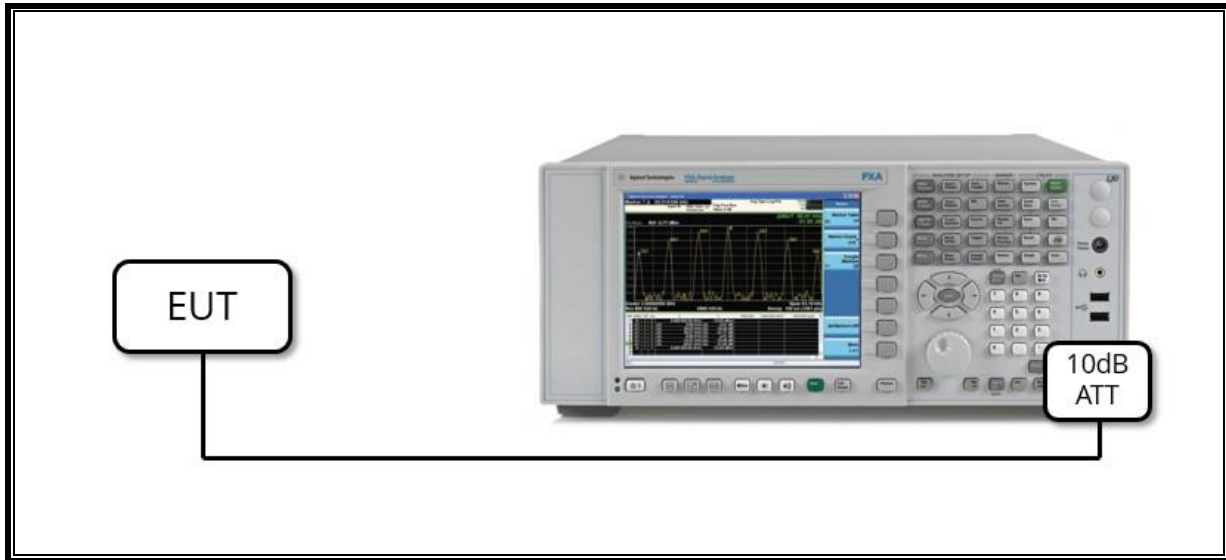

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

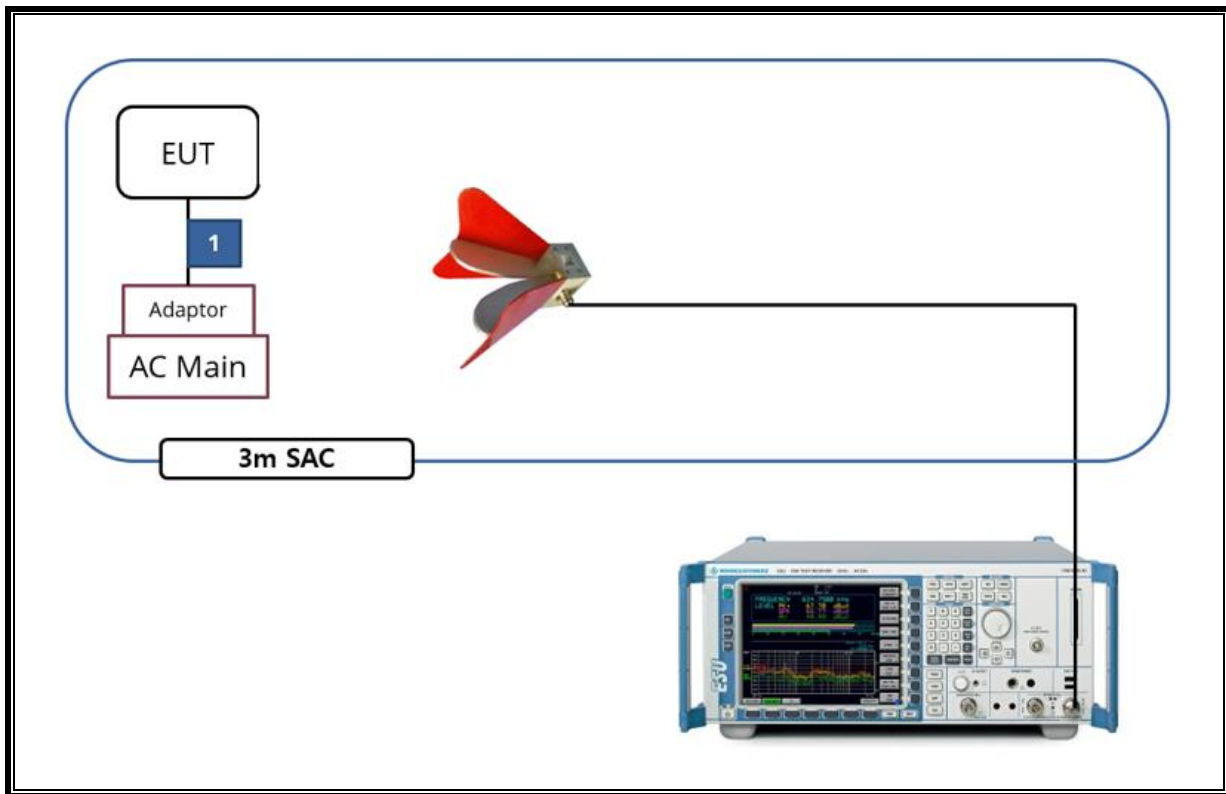

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-19-22
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-13-22
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-13-22
Antenna, Horn, 18 GHz	ETS	3115	00167211	07-27-22
Antenna, Horn, 18 GHz	ETS	3115	00161451	08-15-22
Antenna, Horn, 18 GHz	ETS	3117	00168724	07-27-22
Antenna, Horn, 18 GHz	ETS	3117	00168717	08-15-22
Antenna, Horn, 40 GHz	ETS	3116C	00166155	08-04-22
Antenna, Horn, 40 GHz	ETS	3116C	00168645	10-02-21
Preamplifier	ETS	3116C-PA	00168841	08-06-21
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-03-21
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-03-21
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-06-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-03-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-03-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-04-21
Spectrum Analyzer, 44 GHz	Keysight	N9030B	MY57143717	01-20-21
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-05-21
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-05-21
Spectrum Analyzer, 43.5 GHz	R&S	FSW43	104089	08-06-21
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-05-21
Attenuator	PASTERNAK	PE7087-10	A001	08-03-21
Attenuator	PASTERNAK	PE7087-10	A008	08-03-21
Attenuator	PASTERNAK	PE7004-10	2	08-04-21
Attenuator	PASTERNAK	PE7087-10	A009	08-05-21
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-03-21
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-03-21
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-04-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-03-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-03-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-04-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-03-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-03-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-04-21
LISN	R&S	ENV-216	101837	08-06-21
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-02-21
Termination	WEINSCHL	M1406A	T01	08-05-21
Attenuator	WEINSCHL	WA76-30-21	A015	08-05-21
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.407(e)	6dB Band width (5.8GHz)	500kHz	Condcuted	PASS
15.407 (a)(2)	TX Cond. Power 5.15-2.25, 5.25-5.35 & 5.47-5.725	< 24dBm or 11+10Log(26dB BW)		PASS
15.407 (a)(3)	TX Cond. Power 5.725-5.825	< 30dBm		PASS
15.407 (a)(5)	PSD (5.2,5.3,5.5GHz)	<11dBm		PASS
15.407 (a)(5)	PSD (5.8GHz)	30dBm per 500kHz		PASS
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	PASS
15.407 (b) & 15.209	Radiated Spurious Emission	< 54dBuV/m		PASS
15.407 (h)(2)	Dynamic Frequency Selection	N/A	Condcuted	PASS

8. MEASUREMENT METHODS

On-Time and Duty Cycle : KDB 789033 D02 v02r01, Section II.B.

6dB Emission BW : KDB 789033 D02 v02r01, Section II.C.2.

26dB Emission BW : KDB 789033 D02 v02r01, Section II.C.1.

99% Occupied BW : KDB 789033 D02 v02r01, Section II.D.

Conducted Output Power : KDB 789033 D02 v02r01, Section II.E.3.b(Method PM-G)

Conducted Output Power for Straddle Channel (ch144/142/138 for 20/40/80MHz BW):

KDB 789033 D02 v02r01, Section II.E.2.b(Method SA-1)

Power Spectral Density : KDB 789033 D02 v02r01, Section II.F.

Unwanted emissions in restricted bands : KDB 789033 D02 v02r01, Section II.G.3 – II.G.6.

Unwanted emissions in non-restricted bands : KDB 789033 D02 v02r01, Section II.G.3 – II.G.6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. REFERENCE MEASUREMENTS RESULTS

9.1. ON TIME AND DUTY CYCLE RESULTS

Mode	On Time [ms]	Period [ms]	Duty Cycle X [Linear]	Duty Cycle X [%]	Duty Cycle Correction Factor[dB]
802.11a MIMO	2.792	2.891	0.966	96.576	0.15
802.11n(HT20) MIMO	5.116	5.215	0.981	98.102	-
802.11n(HT40) MIMO	5.387	5.487	0.982	98.178	-
802.11ac(VHT80) MIMO	1.280	1.379	0.928	92.821	0.32

Mode	ANT.	Tone	On Time [ms]	Period [ms]	Duty Cycle X [Linear]	Duty Cycle X [%]	Duty Cycle Correction Factor[dB]
802.11ax HE20	MIMO	26T	5.222	5.324	0.981	98.084	-
		52T	5.104	5.204	0.981	98.078	-
		106T	4.754	4.854	0.979	97.940	0.09
		SU	4.268	4.368	0.977	97.711	0.10
802.11ax HE40	MIMO	26T	5.222	5.326	0.980	98.047	-
		52T	5.104	5.205	0.981	98.060	-
		106T	4.754	4.854	0.979	97.940	0.09
		242T	4.526	4.627	0.978	97.817	0.10
		SU	4.474	4.574	0.978	97.814	0.10
802.11ax HE80	MIMO	26T	5.222	5.326	0.980	98.047	-
		52T	5.102	5.203	0.981	98.059	-
		106T	4.754	4.855	0.979	97.920	0.09
		242T	4.527	4.628	0.978	97.818	0.10
		484T	4.519	4.621	0.978	97.793	0.10
		SU	4.278	4.378	0.977	97.716	0.10

Note. If the duty cycle is over 98%, compensation is not included in average measurement.


LIMITS


None; for reporting purposes only.

PROCEDURE


KDB 789033 D02 v02r01 Zero-Span Spectrum Analyzer Method.

9.2. DUTY CYCLE PLOTS

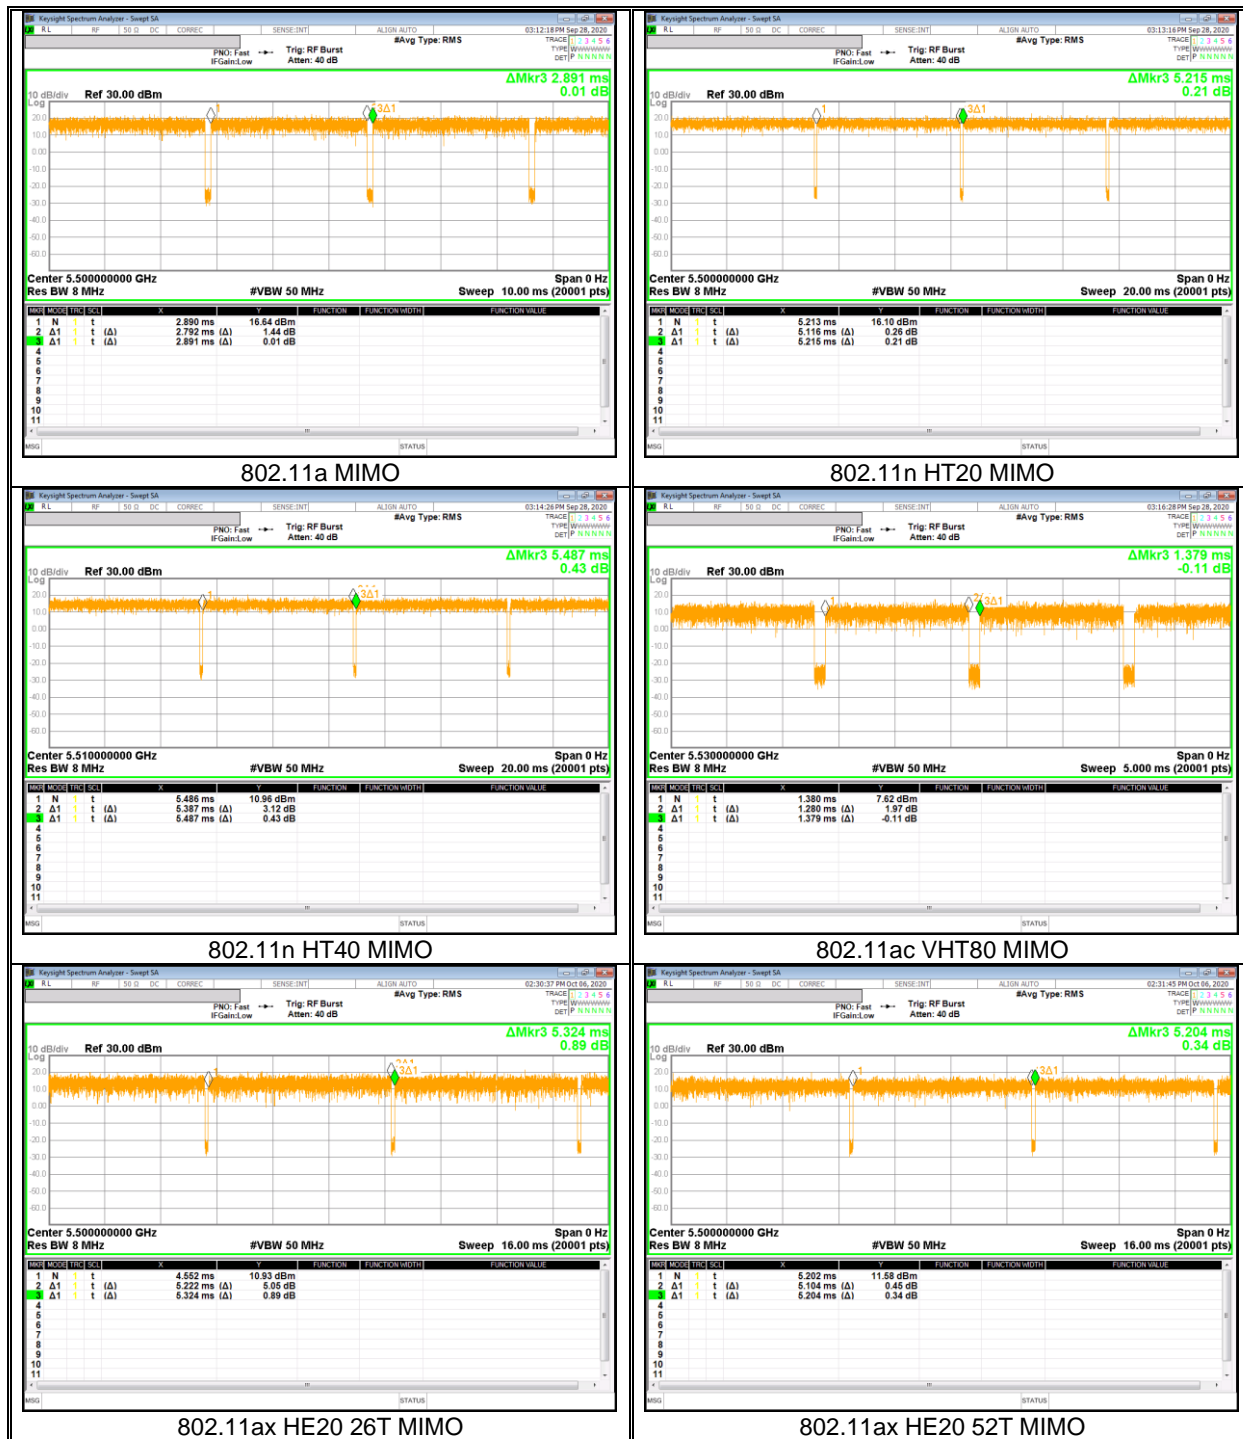


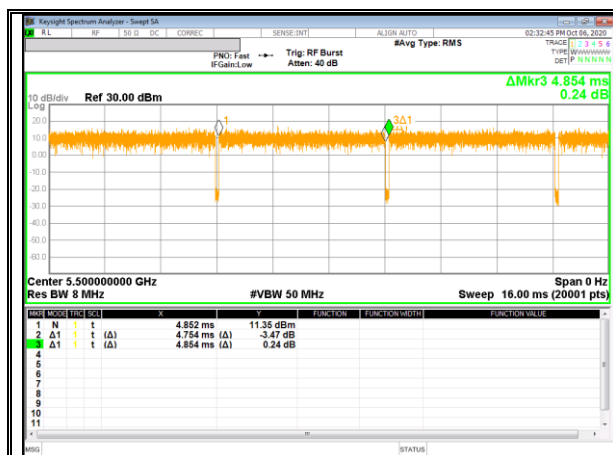


802.11ax HE20 106T MIMO

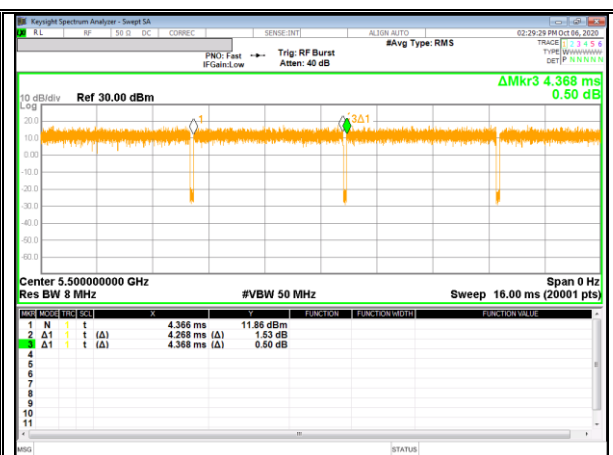


802.11ax HE20 SU MIMO

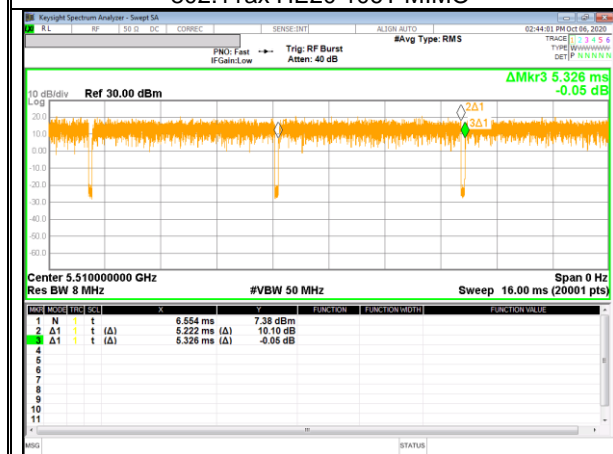


802.11ax HE40 26T MIMO

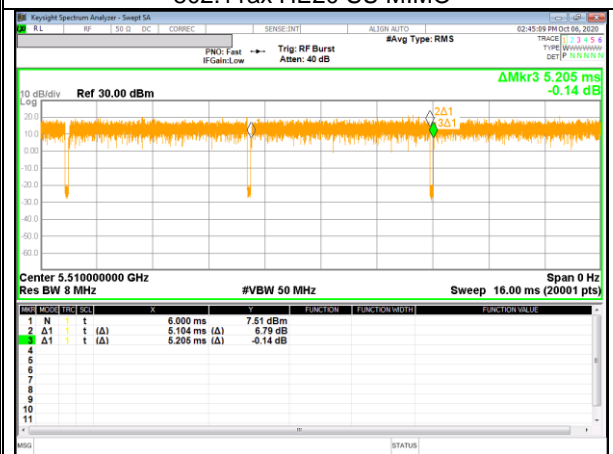


802.11ax HE40 52T MIMO

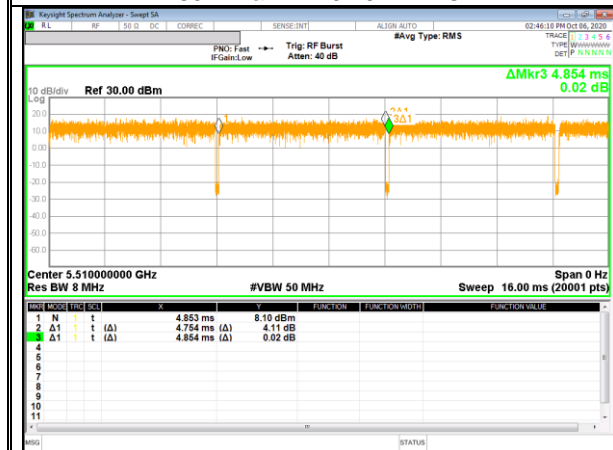


802.11ax HE40 106T MIMO

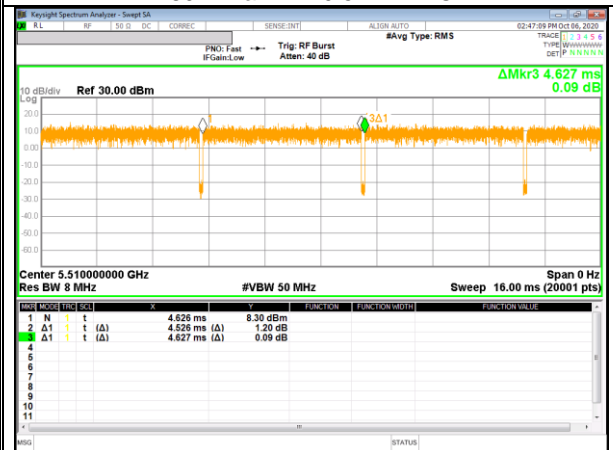

802.11ax HE40 242T MIMO

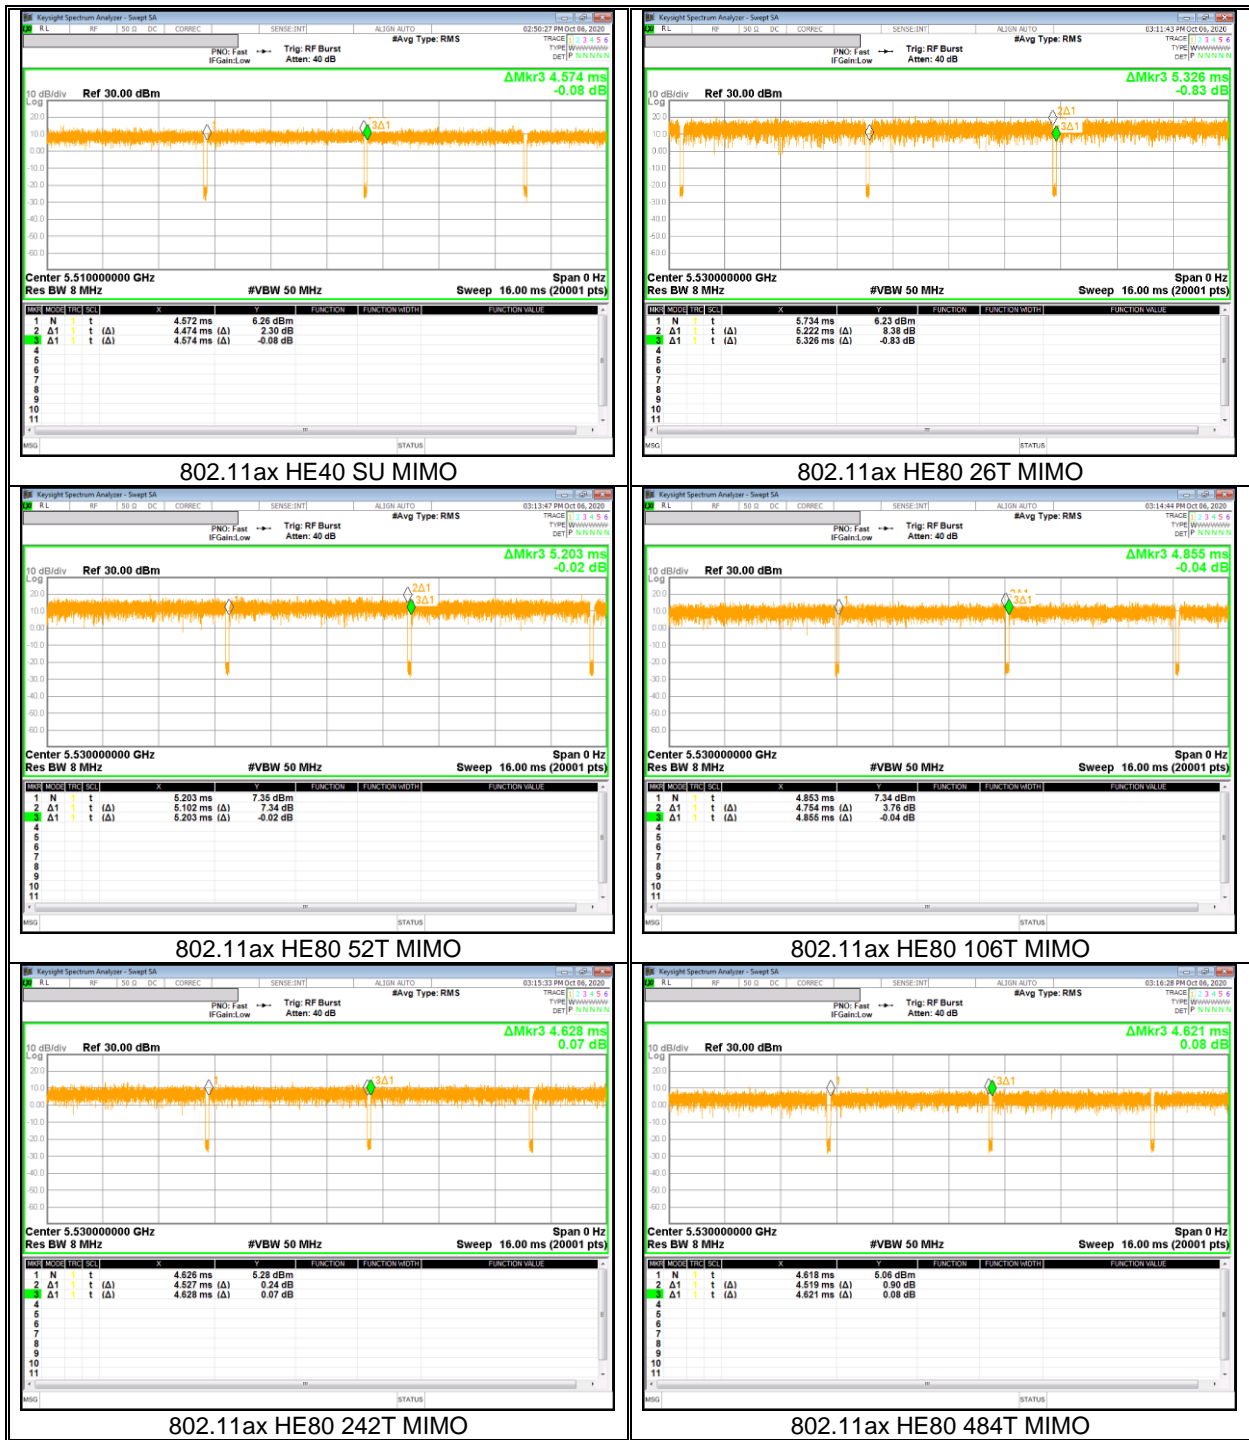

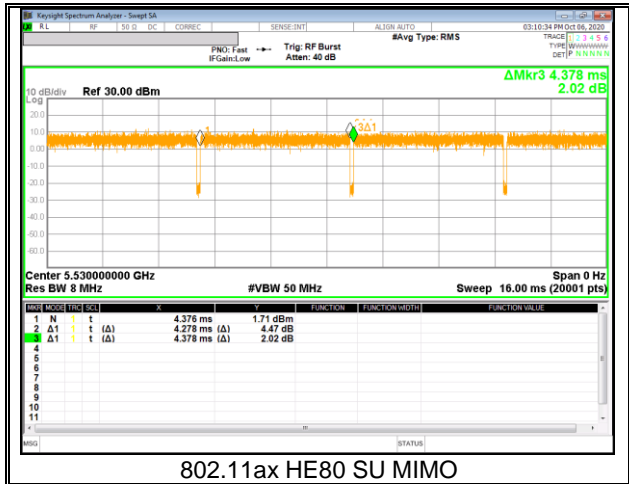

9.3. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer with the RBW set to approximately 1% of EBW, the VBW > RBW, peak detector and max hold.

RESULTS

9.3.1. 5.2 GHz BAND

Band	Mode	Channel	Center Freq. [MHz]	26 dB BW [MHz]		Worst	99% BW [MHz](Note1)	
				ANT1	ANT2		ANT1	ANT2
UNII-1	802.11a	Low	5180	21.12	20.95	20.89	16.58	16.58
		Mid	5200	21.09	21.31		16.69	16.74
		High	5240	20.89	21.56		16.74	16.74
	802.11n HT20	Low	5180	21.07	21.23	21.07	17.74	17.78
		Mid	5200	21.39	21.76		17.88	17.89
		High	5240	21.58	21.72		17.90	17.94
	802.11n HT40	Low	5190	39.57	39.31	39.31	36.10	36.14
		High	5230	40.00	39.62		36.24	36.24
	802.11ac VHT80	Mid	5210	80.57	80.86	80.57	75.43	75.40
	802.11ax HE20(SU)	Low	5180	21.55	21.04	21.00	19.01	19.02
		Mid	5200	21.47	21.30		19.03	19.04
		High	5240	21.54	21.00		19.00	19.02
	802.11ax HE40(SU)	Low	5190	39.82	39.62	39.62	37.55	37.55
		High	5230	39.70	39.83		37.53	37.53
802.11ax HE80(SU)	Mid	5210	80.96	80.89	80.89	76.97	76.97	

Note1. As a result of 99% bandwidth test, the bandwidth of UNII-1 does not interfere with UNII-2A.

9.3.2. 5.3 GHz BAND

Band	Mode	Channel	Center Freq. [MHz]	26 dB BW [MHz]		Worst	99% BW [MHz](Note2)	
				ANT1	ANT2		ANT1	ANT2
UNII-2A	802.11a	Low	5260	21.27	21.04	20.86	16.69	16.75
		Mid	5300	21.26	21.46		16.72	16.72
		High	5320	21.00	20.86		16.58	16.59
	802.11n HT20	Low	5260	21.56	21.55	21.29	17.87	17.85
		Mid	5300	21.48	21.42		17.89	17.90
		High	5320	21.32	21.29		17.74	17.78
	802.11n HT40	Low	5270	39.96	39.86	39.14	36.23	36.26
		High	5310	39.14	39.26		36.13	36.11
	802.11ac VHT80	Mid	5290	81.11	80.84	80.84	75.38	75.41
	802.11ax HE20(SU)	Low	5260	21.26	21.36	21.09	19.02	19.01
		Mid	5300	21.09	21.16		19.01	19.00
		High	5320	21.25	21.25		19.04	19.03
	802.11ax HE40(SU)	Low	5270	39.73	39.67	39.43	37.57	37.53
		High	5310	39.65	39.43		37.50	37.49
802.11ax HE80(SU)	Mid	5290	81.33	81.96	81.33	77.12	76.95	

Note2. As a result of 99% bandwidth test, the bandwidth of UNII-2A does not interfere with UNII-1.

9.3.3. 5.5 GHz BAND

Band	Mode	Channel	Center Freq. [MHz]	26 dB BW [MHz]		Worst
				ANT1	ANT2	
UNII-2C	802.11a	Low	5500	20.79	20.90	20.79
		Mid	5580	21.32	21.37	
		High	5700	21.41	21.24	
	802.11n HT20	Low	5500	21.59	21.44	21.44
		Mid	5580	22.06	21.45	
		High	5700	21.92	21.62	
	802.11n HT40	Low	5510	39.43	39.56	39.42
		Mid	5590	39.76	39.42	
		High	5670	39.75	40.19	
	802.11ac VHT80	Low	5530	80.69	80.63	80.63
		High	5610	81.68	81.45	
	802.11ax HE20(SU)	Low	5500	21.38	21.31	21.18
		Mid	5580	21.18	21.34	
		High	5700	21.64	21.28	
	802.11ax HE40(SU)	Low	5510	39.59	39.60	39.39
		Mid	5590	39.80	39.53	
		High	5670	39.61	39.39	
	802.11ax HE80(SU)	Low	5530	81.23	80.65	80.65
High		5610	81.36	80.79		

9.3.4. STRADDLE CHANNEL

Band	Mode	Channel	Center Freq. [MHz]	26 dB BW [MHz]			
				ANT1		ANT2	
				UNII-2C	UNII-3	UNII-2C	UNII-3
Straddle Channel	802.11a	Straddle	5720	15.518	5.625	15.646	5.528
	802.11n HT20	Straddle	5720	16.906	5.731	15.628	5.608
	802.11n HT40	Straddle	5710	35.024	4.747	34.752	4.956
	802.11ac VHT80	Straddle	5690	75.834	5.547	76.020	5.735
	802.11ax HE20(SU)	Straddle	5720	15.636	5.580	15.688	5.610
	802.11ax HE40(SU)	Straddle	5710	34.696	4.546	34.724	4.914
	802.11ax HE80(SU)	Straddle	5690	75.808	5.122	75.416	5.370

9.3.5. 802.11ax 5.2 GHz BAND(RU)

Band	Mode	Center Freq. [MHz]	Tones	RU offset	26 dB BW [MHz]		99% BW [MHz] ^(Note1)	
					ANT1	ANT2	ANT1	ANT2
UNII-1	HE20	5180	26T	0	19.92	19.51	17.76	18.26
				4	18.42	17.20	15.68	16.55
				8	20.60	19.79	17.90	17.67
		5200		0	19.79	19.57	18.43	16.40
				4	18.43	15.19	15.46	14.57
				8	20.05	14.54	14.72	13.54
	5240	0		19.51	19.57	18.34	17.72	
		4		13.95	16.41	11.69	15.72	
		8		19.43	19.15	17.78	17.10	
	HE40	5190		0	19.87	15.91	17.48	15.03
				9	16.37	22.01	15.30	20.11
				17	17.80	18.08	16.82	17.29
		5230		0	19.38	14.17	17.61	13.36
				9	18.35	22.81	16.36	20.55
				17	17.21	18.80	15.82	17.96
	HE80	5210		0	20.91	18.62	17.87	15.11
				18	36.31	35.79	34.72	34.00
				36	22.59	17.83	18.67	16.84

Note1. As a result of 99% bandwidth test, the bandwidth of UNII-1 does not interfere with UNII-2A.

9.3.6. 802.11ax 5.3 GHz BAND(RU)

Band	Mode	Center Freq. [MHz]	Tones	RU offset	26 dB BW [MHz]		99% BW [MHz] ^(Note2)	
					ANT1	ANT2	ANT1	ANT2
UNII-2A	HE20	5260	26T	0	19.27	18.88	18.03	17.73
				4	16.54	17.44	14.62	16.61
				8	19.36	19.70	18.42	16.67
		5300		0	19.77	19.66	18.37	17.29
				4	19.05	14.63	16.49	13.91
				8	20.49	18.23	17.42	17.05
	5320	0		18.59	19.56	17.40	17.11	
		4		17.26	16.77	15.49	15.64	
		8		18.67	18.40	17.62	17.34	
	HE40	5270		0	16.90	15.41	16.09	14.62
				9	15.95	18.41	14.79	17.34
				17	15.98	18.70	15.26	17.89
		5310		0	9.34	14.64	8.63	13.89
				9	16.48	21.63	13.64	20.19
				17	19.33	19.15	18.07	18.02
	HE80	5290		0	19.62	14.68	18.41	13.65
				18	33.84	32.26	30.26	30.57
				36	18.07	19.51	16.72	18.37

Note2. As a result of 99% bandwidth test, the bandwidth of UNII-2A does not interfere with UNII-1.

9.3.7. 802.11ax 5.5 GHz BAND(RU)


Band	Mode	Center Freq. [MHz]	Tones	RU offset	26 dB BW [MHz]	
					ANT1	ANT2
UNII-2C	HE20	5500	26T	0	19.12	18.58
				4	17.50	16.79
				8	18.47	18.95
		5580		0	19.56	14.59
				4	18.08	15.44
				8	20.49	19.61
		5700		0	20.19	18.03
				4	9.53	17.99
				8	20.06	19.10
	HE40	5510		0	17.90	18.67
				9	21.84	13.32
				17	18.94	17.70
		5590		0	19.72	16.54
				9	19.65	21.18
				17	17.00	12.72
		5670		0	19.94	18.63
				9	14.57	18.75
				17	19.13	17.67
	HE80	5530		0	20.34	19.67
				18	36.91	37.81
		5610		36	21.44	20.59
				0	19.45	15.92
		18		38.69	37.32	
		36		20.95	18.63	

9.3.8. 802.11ax STRADDLE CHANNEL(RU)


Band	Mode	Center Freq. [MHz]	Tones	RU offset	26 dB BW [MHz]			
					ANT1		ANT2	
					UNII-2C	UNII-3	UNII-2C	UNII-3
Straddle Channel	HE20	5720	26T	6	15.032	3.244	13.068	4.000
	HE40	5710		15	14.300	3.454	14.344	3.354
	HE80	5690		34	16.864	4.050	14.536	4.130

9.3.9. 26 dB BANDWIDTH PLOTS

UNII 5.2 GHz IEEE 802.11a mode

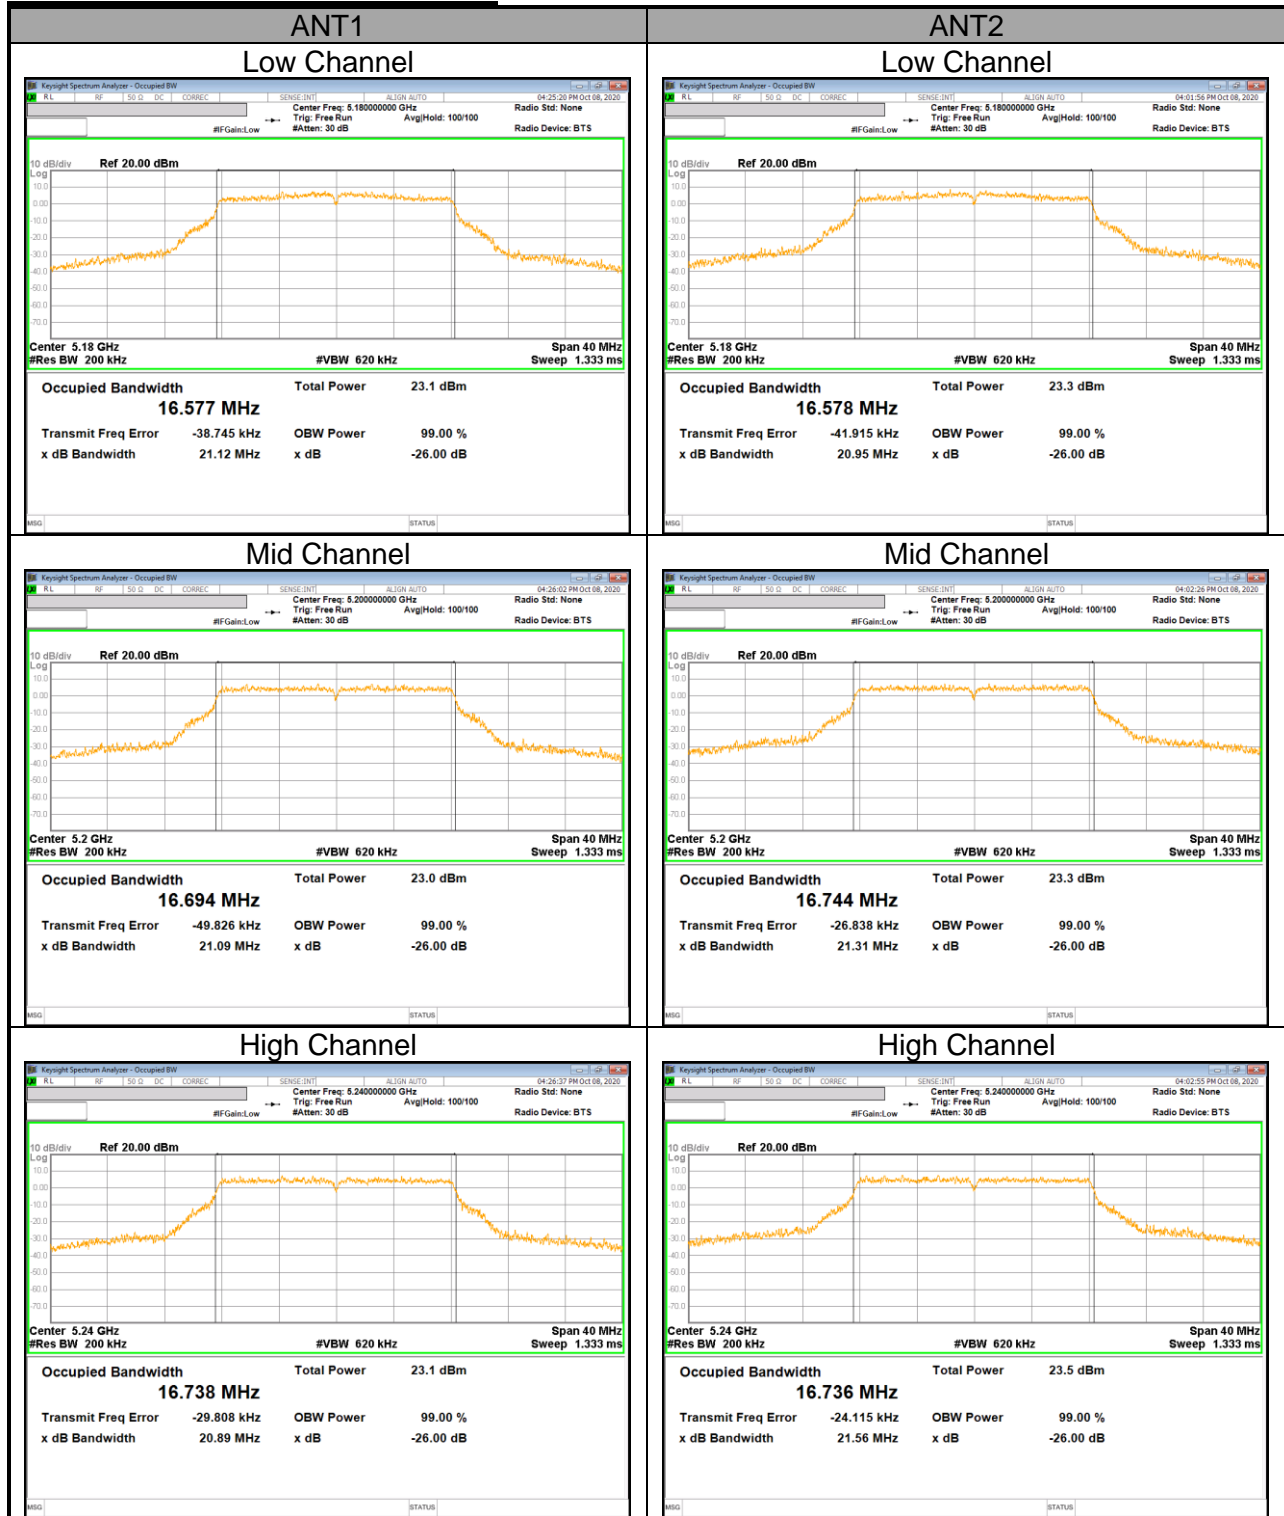


UNII 5.2 GHz IEEE 802.11n HT20 mode

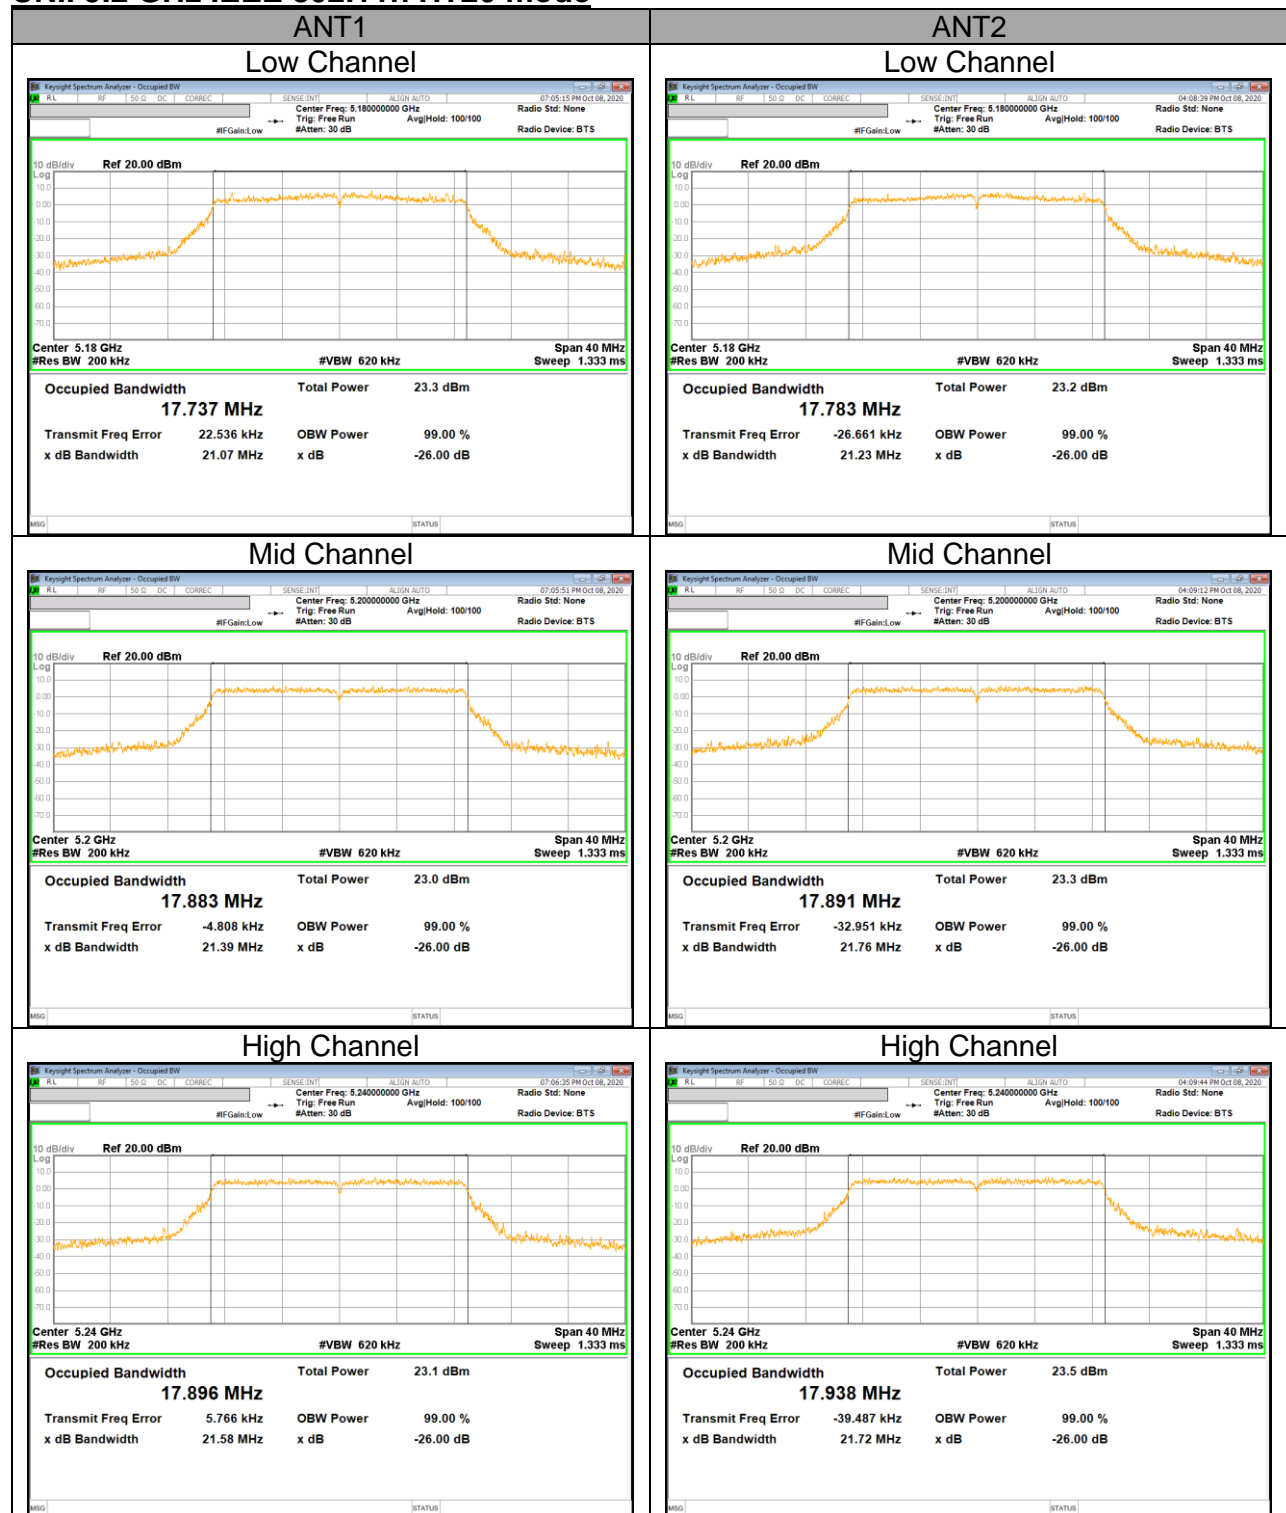


UNII 5.2 GHz IEEE 802.11n HT40 mode



UNII 5.2 GHz IEEE 802.11ac VHT80 mode

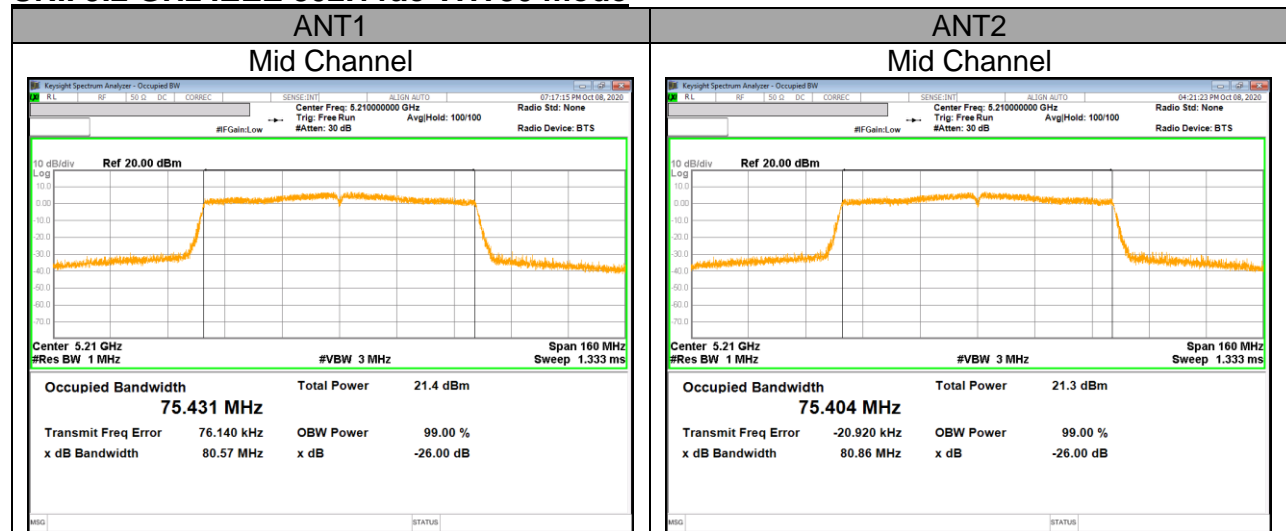


UNII 5.2 GHz IEEE 802.11ax HE20 SU mode

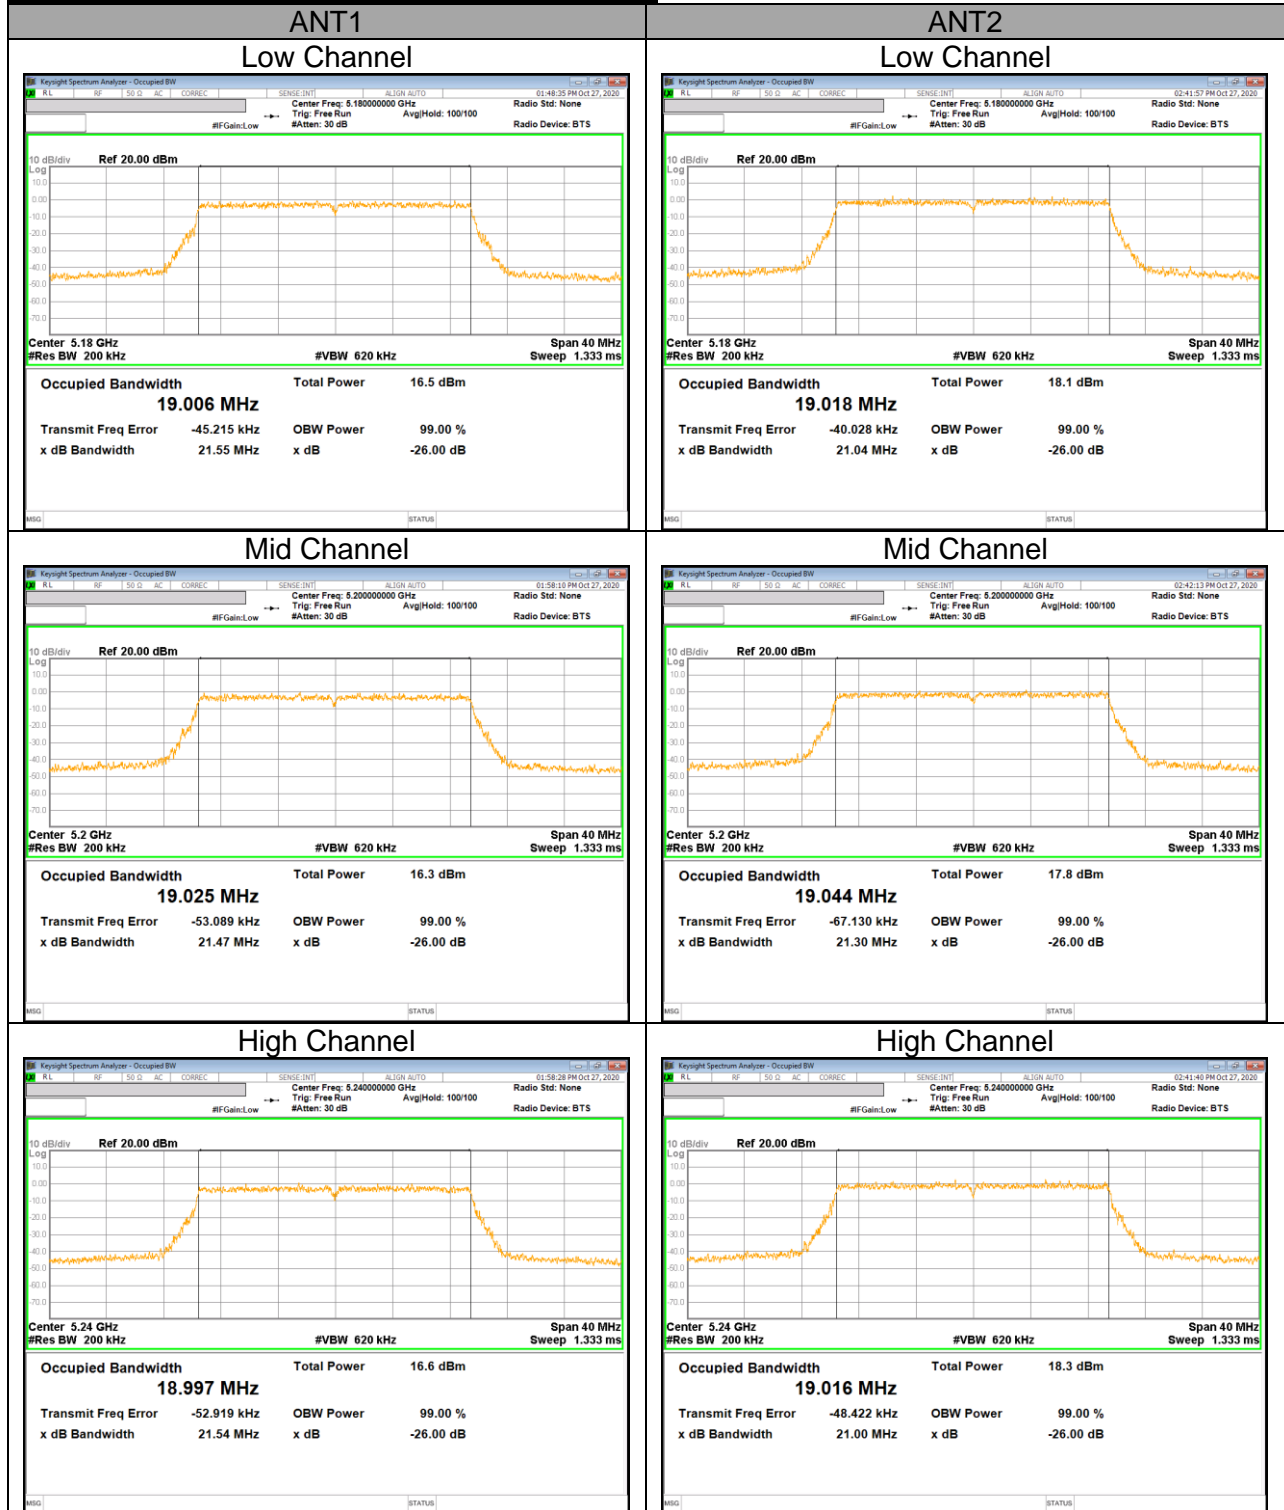

UNII 5.2 GHz IEEE 802.11ax HE40 SU mode




UNII 5.2 GHz IEEE 802.11ax HE80 SU mode

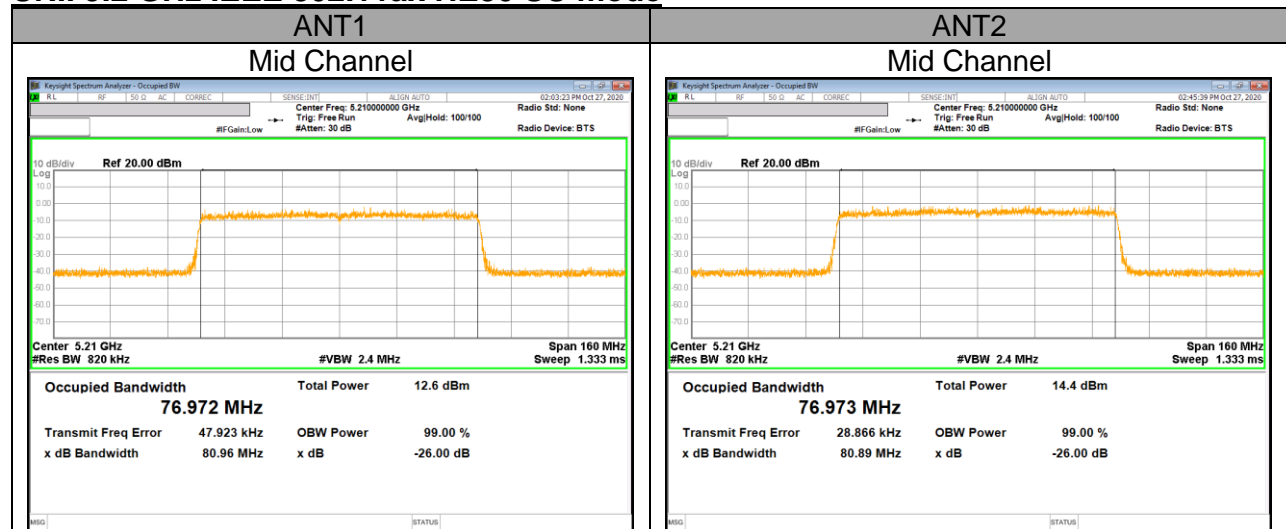

UNII 5.3 GHz IEEE 802.11a mode




UNII 5.3 GHz IEEE 802.11n HT20 mode

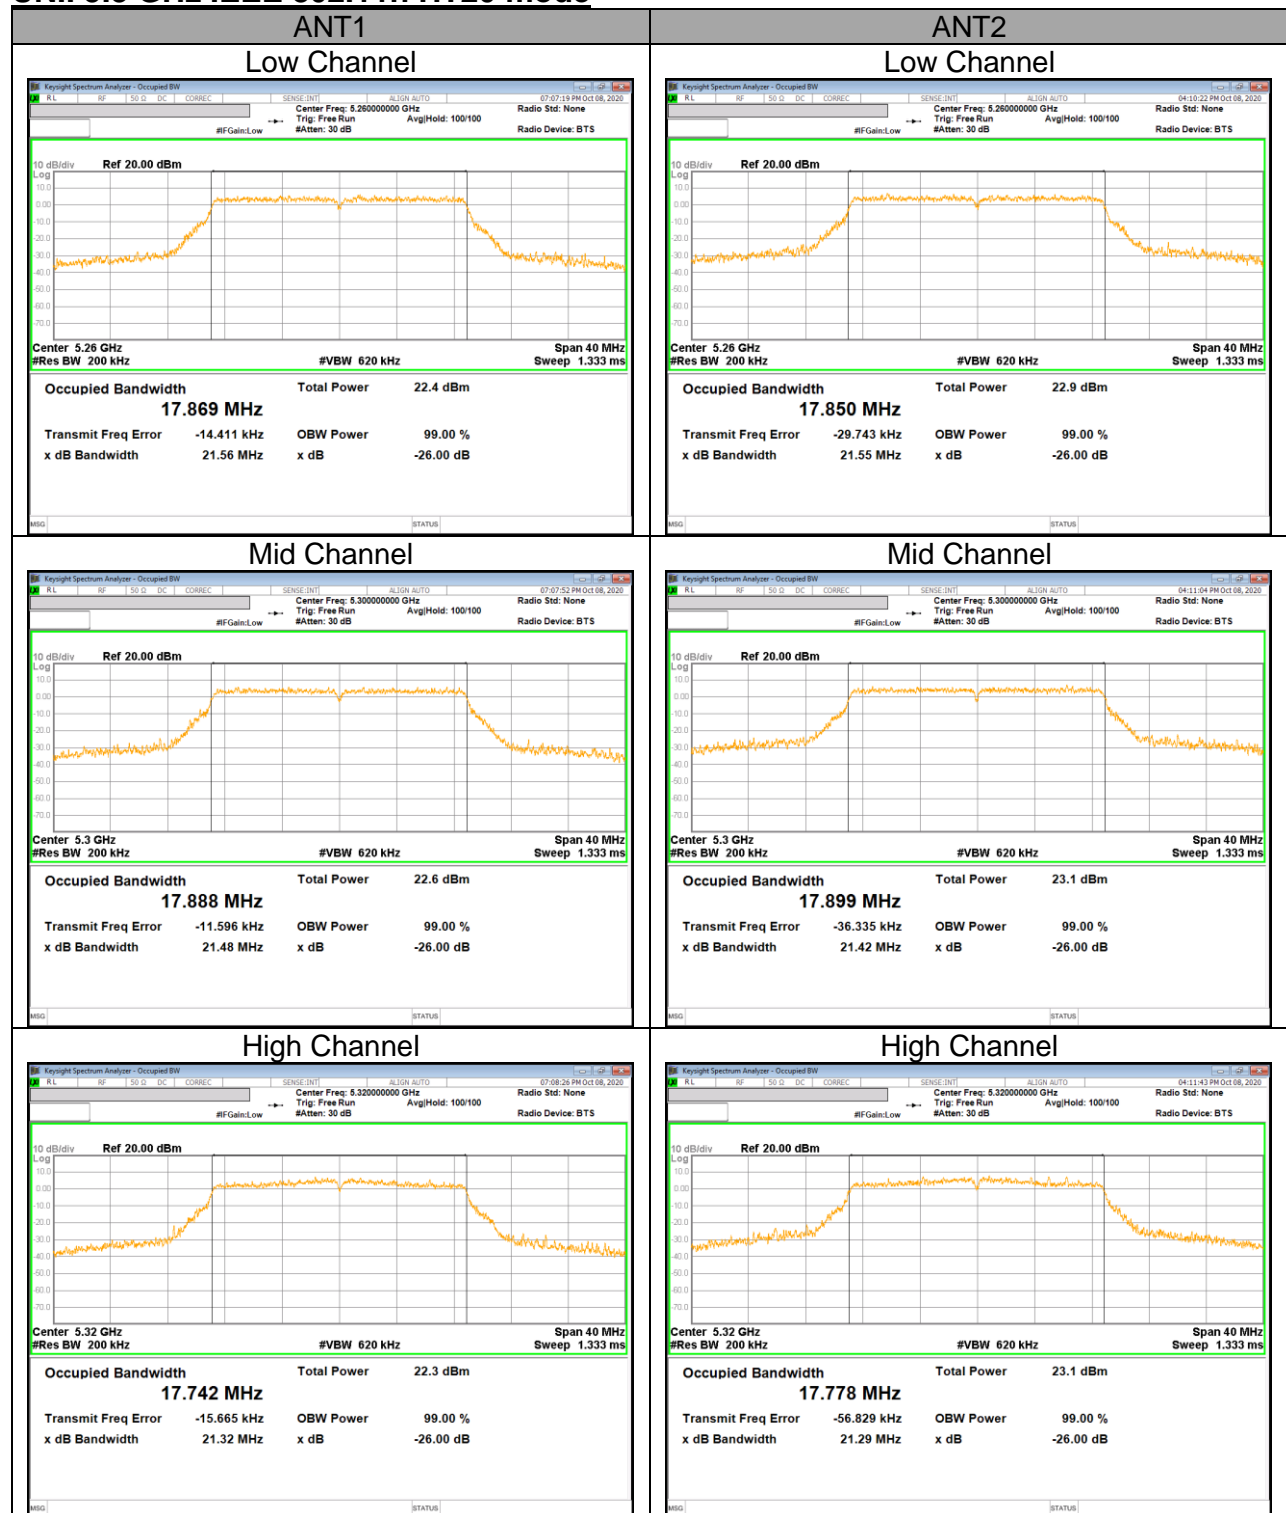

UNII 5.3 GHz IEEE 802.11n HT40 mode



UNII 5.3 GHz IEEE 802.11ac VHT80 mode

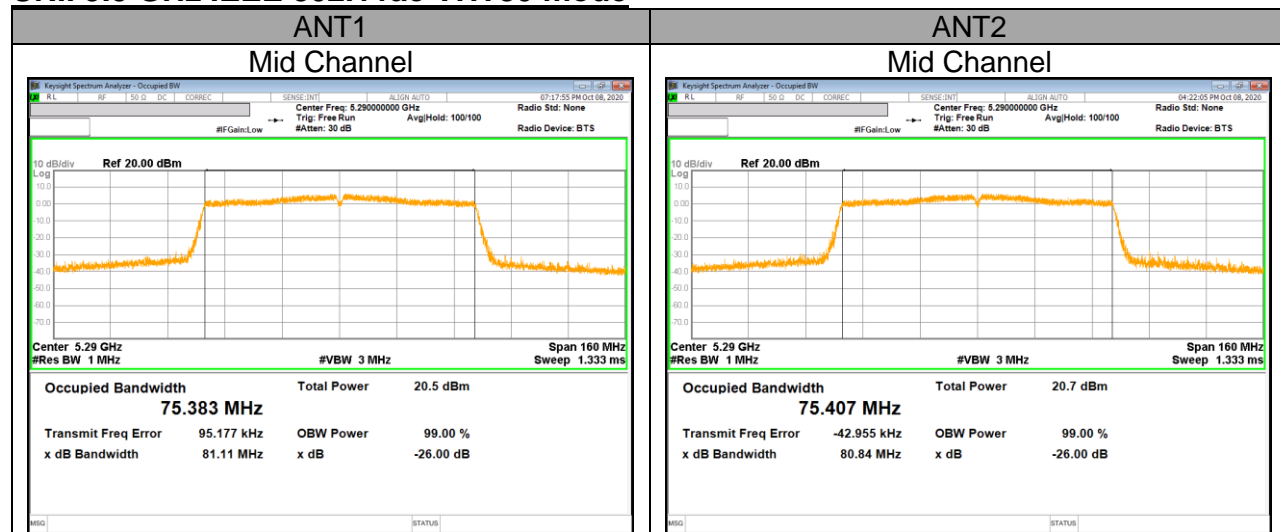

UNII 5.3 GHz IEEE 802.11ax HE20(SU) mode

