



LTE Band 26 (Part 90)



LTE Band 26 (Part 22)

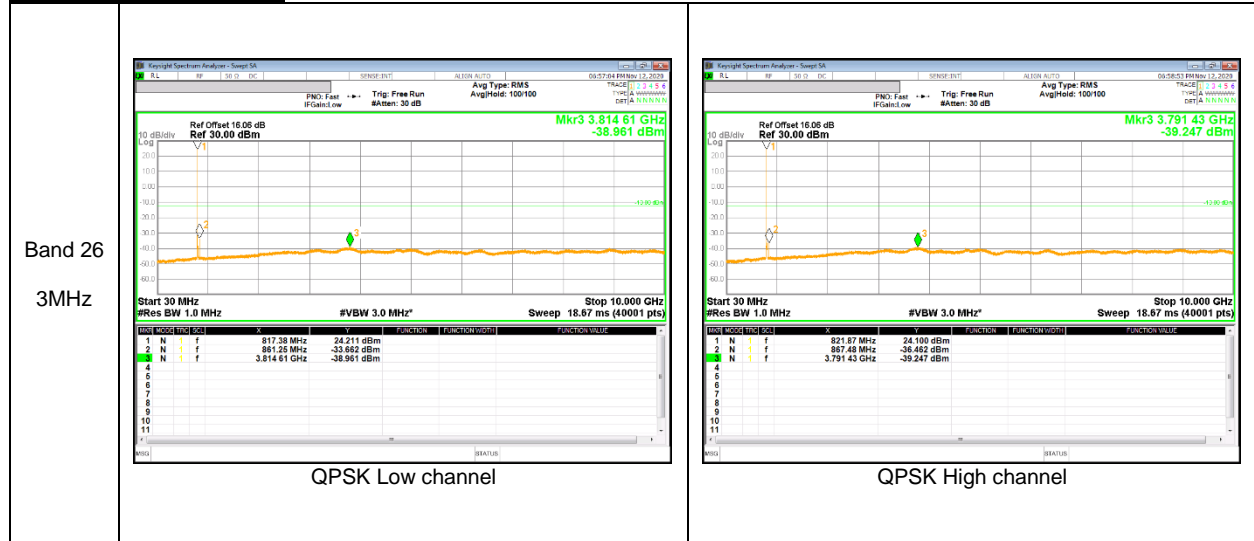

LTE Band 41 (PC2)

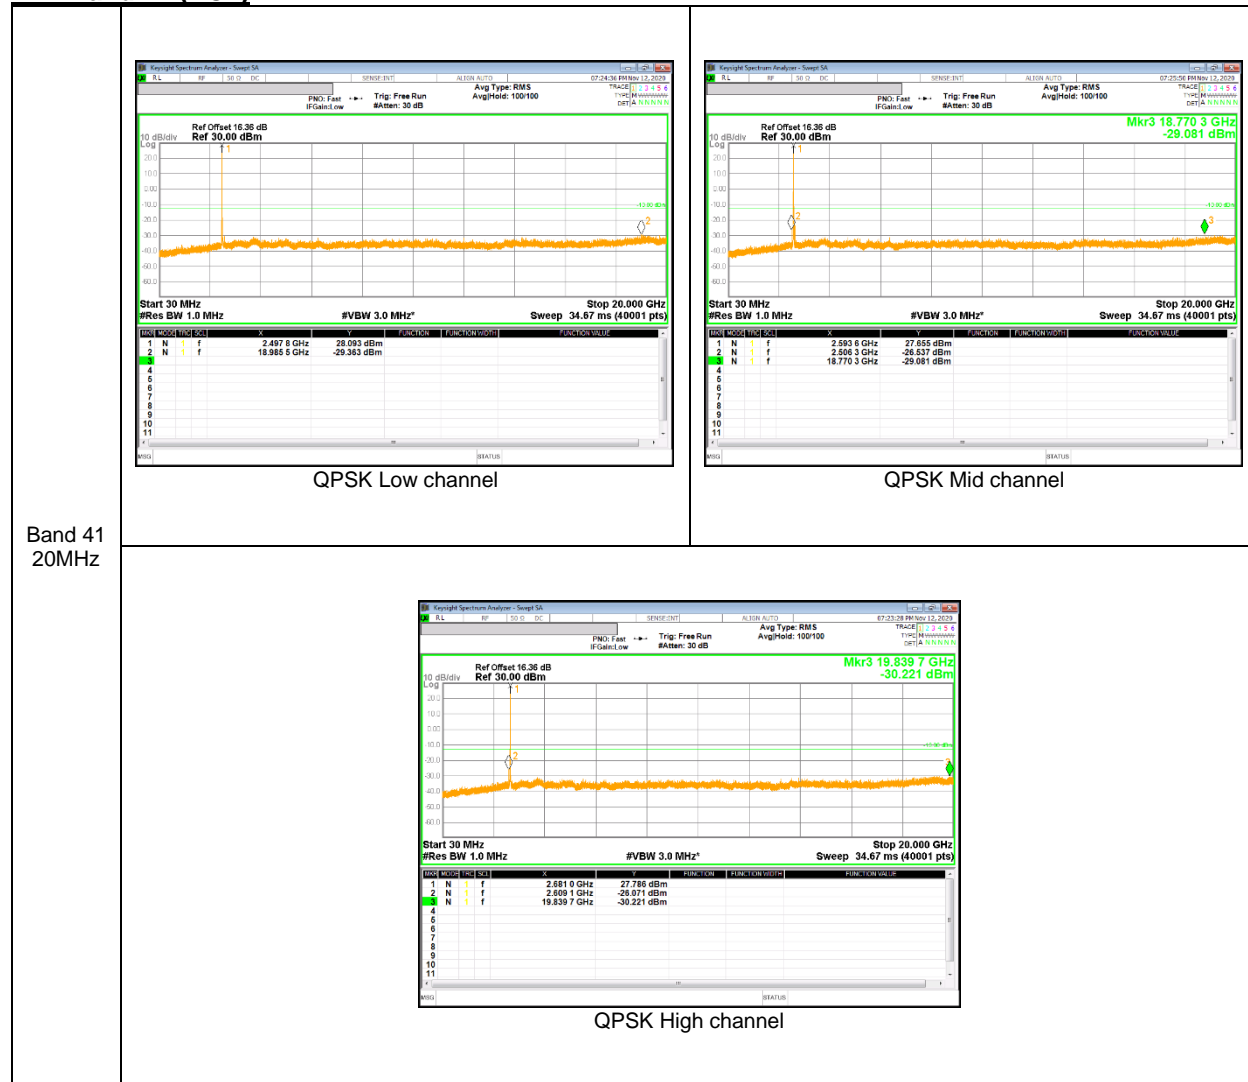

Band 41
20MHz

LTE Band 66



LTE Band 2

LTE Band 2(Frequency range: 1850-1910 MHz) is covered by LTE Band 25 (Frequency range: 1850-1915 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 4

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 5

LTE Band 5 (Frequency range: 824-849 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 17

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band41(PC3)

LTE Band 41(PC3, Frequency range : 2496-2690 MHz) is covered by LTE Band 41(PC2) (Frequency range: 2496-2690 MHz) due to same frequency range, same channel bandwidth and maximum tune-up limit is higher than LTE Band41(PC3).

NR Band n5



NR Band n66



9.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54 and §90.213

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

§90.213 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01

RESULTS

See the following pages.

NOTE : Test were performed each lowest or highest frequency on the modulation condition of more wide bandwidth.(Please refer to section 9.1.1 OBW results)

9.4.1. FREQUENCY STABILITY RESULTS

GSM 850, Channel 128/251, Frequency 824.2/848.8 MHz

Reference Frequency : GSM850 Low Channel 824.2 MHz / High Channel 848.8 MHz @ 20°C							
Limit: +/- 2.5 ppm =		Low Channel	2060.500	Hz	High Channel	2122.000	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.88	50	824.20003267	0.010	848.80001837	0.002	2.5	
3.88	40	824.20003471	0.008	848.80002873	-0.011	2.5	
3.88	30	824.20003622	0.006	848.80001517	0.005	2.5	
3.88	20	824.20004129	0.000	848.80001973	0.000	2.5	
3.88	10	824.20002851	0.016	848.80001575	0.005	2.5	
3.88	0	824.20009356	-0.063	848.80006993	-0.059	2.5	
3.88	-10	824.20006160	-0.025	848.80004617	-0.031	2.5	
3.88	-20	824.20008768	-0.056	848.80003019	-0.012	2.5	
3.88	-30	824.20010089	-0.072	848.80003681	-0.020	2.5	

Reference Frequency : GSM850 Low Channel 824.2 MHz / High Channel 848.8 MHz @ 20°C							
Limit: +/- 2.5 ppm =		Low Channel	2060.500	Hz	High Channel	2122.000	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.88	20	824.20004129	0	848.80001973	0	2.5	
4.42	20	824.20001120	0.037	848.80001333	0.008	2.5	
3.65	20	824.20001207	0.035	848.80001062	0.011	2.5	

GSM 1900, Channel 512/810, Frequency 1850.0/1910.0 MHz (Lowest Frequency:EGPRS / Highest Frequency: EGPRS)

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1850.0779	1909.9244		
Extreme (50C)		1850.0780	1909.9245	131.7	0.070
Extreme (40C)		1850.0780	1909.9245	104.2	0.055
Extreme (30C)		1850.0780	1909.9246	171.3	0.091
Extreme (10C)		1850.0780	1909.9245	130.1	0.069
Extreme (0C)		1850.0780	1909.9246	148.3	0.079
Extreme (-10C)		1850.0780	1909.9245	87.3	0.046
Extreme (-20C)		1850.0779	1909.9245	74.8	0.040
Extreme (-30C)		1850.0779	1909.9245	79.6	0.042
20C		15%	1850.0780	1909.9244	16.9
	-15%	1850.0780	1909.9244	22.3	0.012
	End Point	1850.0780	1909.9244	29.5	0.016

WCDMA Band 5

Reference Frequency : WCDMA Band 5 Low Channel 826.4 MHz / High Channel 846.6 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2066.000	Hz	High Channel	2116.500	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse					Limit [ppm]
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.88	50	826.40002306	-0.015	846.60003518	-0.019	2.5	
3.88	40	826.40001669	-0.007	846.60001119	0.009	2.5	
3.88	30	826.40000938	0.002	846.60001585	0.004	2.5	
3.88	20	826.40001101	0.000	846.60001923	0.000	2.5	
3.88	10	826.40002004	-0.011	846.60002151	-0.003	2.5	
3.88	0	826.40002190	-0.013	846.60002402	-0.006	2.5	
3.88	-10	826.40008675	-0.092	846.60003385	-0.017	2.5	
3.88	-20	826.40009383	-0.100	846.60004193	-0.027	2.5	
3.88	-30	826.40014390	-0.161	846.60004334	-0.028	2.5	

Reference Frequency : WCDMA Band 5 Low Channel 826.4 MHz / High Channel 846.6 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2066.000	Hz	High Channel	2116.500	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse					Limit [ppm]
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.88	20	826.40001101	0	846.60001923	0	2.5	
4.42	20	826.40000387	0.009	846.60000278	0.019	2.5	
3.65	20	826.40000292	0.010	846.60000458	0.017	2.5	

WCDMA Band 4 (Lowest Frequency:HSDPA / Highest Frequency: REL99)

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW (MHz)	F high @ End of OBW (MHz)		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1710.3226	1754.6764		
Extreme (50C)		1710.3226	1754.6764	21.0	0.012
Extreme (40C)		1710.3226	1754.6764	21.3	0.012
Extreme (30C)		1710.3226	1754.6764	18.5	0.011
Extreme (10C)		1710.3226	1754.6764	17.7	0.010
Extreme (0C)		1710.3226	1754.6764	29.4	0.017
Extreme (-10C)		1710.3226	1754.6764	26.1	0.015
Extreme (-20C)		1710.3226	1754.6764	12.0	0.007
Extreme (-30C)		1710.3226	1754.6764	14.7	0.008
20C	15%	1710.3226	1754.6764	4.2	0.002
	-15%	1710.3226	1754.6764	4.6	0.003
	End Point	1710.3226	1754.6764	4.9	0.003

WCDMA Band 2 (Lowest Frequency:HSDPA / Highest Frequency: HSDPA)

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1850.3231	1909.6688		
Extreme (50C)		1850.3231	1909.6688	74.0	0.039
Extreme (40C)		1850.3231	1909.6688	79.9	0.043
Extreme (30C)		1850.3231	1909.6688	94.5	0.050
Extreme (10C)		1850.3232	1909.6689	175.0	0.093
Extreme (0C)		1850.3232	1909.6689	148.6	0.079
Extreme (-10C)		1850.3232	1909.6689	149.5	0.080
Extreme (-20C)		1850.3232	1909.6689	180.7	0.096
Extreme (-30C)		1850.3232	1909.6689	150.7	0.080
20C	15%	1850.3231	1909.6688	5.1	0.003
	-15%	1850.3231	1909.6688	5.8	0.003
	End Point	1850.3231	1909.6688	5.8	0.003

LTE Band 12 (Lowest Frequency:16QAM / Highest Frequency: 16QAM)

Limit		699	716	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	699.1581	715.8456		
Extreme (50C)		699.1581	715.8456	18.8	0.027
Extreme (40C)		699.1581	715.8456	22.7	0.032
Extreme (30C)		699.1581	715.8456	6.6	0.009
Extreme (10C)		699.1581	715.8456	16.0	0.023
Extreme (0C)		699.1581	715.8456	3.4	0.005
Extreme (-10C)		699.1581	715.8456	12.7	0.018
Extreme (-20C)		699.1581	715.8456	23.1	0.033
Extreme (-30C)		699.1581	715.8456	24.3	0.034
20C	15%	699.1581	715.8456	4.0	0.006
	-15%	699.1581	715.8456	3.4	0.005
	End Point	699.1581	715.8456	3.4	0.005

LTE Band 13 (Lowest Frequency:16QAM / Highest Frequency: 16QAM)

Limit		777	787	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	777.2474	786.7430	6.5	0.008
Extreme (50C)		777.2474	786.7430		
Extreme (40C)		777.2474	786.7430		
Extreme (30C)		777.2474	786.7430		
Extreme (10C)		777.2474	786.7430		
Extreme (0C)		777.2474	786.7430		
Extreme (-10C)		777.2474	786.7430		
Extreme (-20C)		777.2474	786.7430		
Extreme (-30C)		777.2474	786.7430		
20C		15%	777.2474		
	-15%	777.2474	786.7430	4.8	0.006
	End Point	777.2474	786.7430	4.5	0.006

LTE Band 25 (QPSK)

Limit		1850	1915	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1850.1556	1914.8432	128.7	0.068
Extreme (50C)		1850.1557	1914.8433		
Extreme (40C)		1850.1557	1914.8433		
Extreme (30C)		1850.1557	1914.8433		
Extreme (10C)		1850.1556	1914.8432		
Extreme (0C)		1850.1556	1914.8432		
Extreme (-10C)		1850.1556	1914.8432		
Extreme (-20C)		1850.1556	1914.8432		
Extreme (-30C)		1850.1556	1914.8432		
20C		15%	1850.1557		
	-15%	1850.1557	1914.8432	6.1	0.003
	End Point	1850.1557	1914.8432	6.2	0.003

LTE Band 26

Reference Frequency : LTE Band 26 Low Channel 814.7 MHz / High Channel 848.3 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2036.750	Hz	High Channel	2120.750	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse					Limit [ppm]
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.88	50	814.70001349	0.007	848.30002160	-0.001	2.5	
3.88	40	814.70001871	0.000	848.30001648	0.005	2.5	
3.88	30	814.70002166	-0.003	848.30001774	0.003	2.5	
3.88	20	814.70001904	0.000	848.30002044	0.000	2.5	
3.88	10	814.70025001	-0.284	848.30014269	-0.144	2.5	
3.88	0	814.70024075	-0.272	848.30010585	-0.101	2.5	
3.88	-10	814.70020821	-0.232	848.30009865	-0.092	2.5	
3.88	-20	814.70024006	-0.271	848.30006808	-0.056	2.5	
3.88	-30	814.70017195	-0.188	848.30005912	-0.046	2.5	

Reference Frequency : LTE Band 26 Low Channel 814.7 MHz / High Channel 848.3 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2036.750	Hz	High Channel	2120.750	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse					Limit [ppm]
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.88	20	814.70001904	0	848.30002044	0	2.5	
4.42	20	814.70000425	0.018	848.30000546	0.018	2.5	
3.65	20	814.70000402	0.018	848.30000408	0.019	2.5	

LTE Band 41 (Lowest Frequency:16QAM / Highest Frequency: 16QAM)

Limit		2496	2690	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	2494.0126	2691.9788		
Extreme (50C)		2494.0126	2691.9788	44.5	0.017
Extreme (40C)		2494.0126	2691.9788	36.4	0.014
Extreme (30C)		2494.0126	2691.9788	36.6	0.014
Extreme (10C)		2494.0126	2691.9788	45.9	0.018
Extreme (0C)		2494.0127	2691.9789	82.9	0.032
Extreme (-10C)		2494.0127	2691.9789	94.7	0.037
Extreme (-20C)		2494.0127	2691.9789	147.1	0.057
Extreme (-30C)		2494.0128	2691.9790	207.8	0.080
20C	15%	2494.0126	2691.9788	10.7	0.004
	-15%	2494.0126	2691.9788	11.3	0.004
	End Point	2494.0126	2691.9788	11.2	0.004

LTE Band 66 (Lowest Frequency: 16QAM / Highest Frequency: QPSK)

Limit		1710	1780	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1710.6995	1779.3005		
Extreme (50C)		1710.6995	1779.3006	31.7	0.018
Extreme (40C)		1710.6995	1779.3006	41.3	0.024
Extreme (30C)		1710.6995	1779.3006	24.8	0.014
Extreme (10C)		1710.6995	1779.3006	42.5	0.024
Extreme (0C)		1710.6995	1779.3006	58.6	0.034
Extreme (-10C)		1710.6995	1779.3006	34.7	0.020
Extreme (-20C)		1710.6995	1779.3006	35.9	0.021
Extreme (-30C)		1710.6995	1779.3006	40.6	0.023
20C	15%	1710.6995	1779.3006	7.5	0.004
	-15%	1710.6995	1779.3006	6.2	0.004
	End Point	1710.6995	1779.3006	7.3	0.004

LTE Band 2

LTE Band 2(Frequency range: 1850-1910 MHz) is covered by LTE Band 25 (Frequency range: 1850-1915 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 4

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 5

LTE Band 5 (Frequency range: 824-849 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 17

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band41(PC3)

LTE Band 41(PC3, Frequency range : 2496-2690 MHz) is covered by LTE Band 41(PC2) (Frequency range: 2496-2690 MHz) due to same frequency range, same channel bandwidth and maximum tune-up limit is higher than LTE Band41(PC3).

5G NR Band 5

Reference Frequency : 5G NR Band 5 Low Channel 826.5 MHz / High Channel 846.5 MHz @ 20°C						
Limit: +/- 2.5 ppm =		Low Channel	2066.250	Hz	High Channel	2116.250
		Frequency Deviation Measured with Time Elapse				
Power Supply [Vdc]	Environment Temperature [°C]	Low Channel		High Channel		Limit [ppm]
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.88	50	826.50004390	-0.006	846.50006147	-0.010	2.5
3.88	40	826.50005277	-0.017	846.50004838	0.005	2.5
3.88	30	826.50004025	-0.002	846.50004793	0.006	2.5
3.88	20	826.50003862	0.000	846.50005274	0.000	2.5
3.88	10	826.50005128	-0.015	846.50006449	-0.014	2.5
3.88	0	826.50004657	-0.010	846.50005060	0.003	2.5
3.88	-10	826.50006392	-0.031	846.50004742	0.006	2.5
3.88	-20	826.50004250	-0.005	846.50006360	-0.013	2.5
3.88	-30	826.50006363	-0.030	846.50004985	0.003	2.5

Reference Frequency : 5G NR Band 5 Low Channel 826.5 MHz / High Channel 846.5 MHz @ 20°C						
Limit: +/- 2.5 ppm =		Low Channel	2066.250	Hz	High Channel	2116.250
		Frequency Deviation Measured with Time Elapse				
Power Supply [Vdc]	Environment Temperature [°C]	Low Channel		High Channel		Limit [ppm]
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.88	20	826.50003862	0	846.50005274	0	2.5
4.42	20	826.50002242	0.020	846.50001069	0.050	2.5
3.65	20	826.50001863	0.024	846.50002137	0.037	2.5

5G NR Band 66(Lowest Frequency: 16QAM / Highest Frequency: QPSK)

Limit		1710	1780	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW (MHz)	F high @ End of OBW (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1708.0115	1781.9757	6.3	0.004
Extreme (50C)		1708.0115	1781.9757		
Extreme (40C)		1708.0115	1781.9757		
Extreme (30C)		1708.0115	1781.9757		
Extreme (10C)		1708.0115	1781.9757		
Extreme (0C)		1708.0115	1781.9757		
Extreme (-10C)		1708.0115	1781.9757		
Extreme (-20C)		1708.0115	1781.9757		
Extreme (-30C)		1708.0115	1781.9757		
20C	15%	1708.0115	1781.9757	8.8	0.005
	-15%	1708.0115	1781.9757	7.6	0.004
	End Point	1708.0115	1781.9757	7.6	0.004

9.5. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50, §27.53 and §90.635

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50:

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) (10) - Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d) (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

90.635(b) – The maximum output power of the transmitter for mobile stations is 100 watts (20dBw).

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.17; ESU40 setting reference to 971168 D01 v03r01

For radiated output power measurement with a ESU40:

- a) Set the RBW \geq OBW;
- b) Set VBW \geq 3 \times RBW;
- c) Set span \geq 2 \times RBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points \geq span/RBW;
- g) Trace mode = max hold (GSM, WCDMA, 5G NR), average(LTE);

Note

5G NR: All Waveforms (CP-OFDM vs DFT-s OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

TEST RESULTS

9.5.1. ERP/EIRP Results

GSM

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
GSM850	GPRS	128	824.2	31.28	1342.76
		190	836.6	32.24	1674.94
		251	848.8	31.62	1452.11
	EGPRS	128	824.2	24.51	282.49
		190	836.6	25.47	352.37
		251	848.8	25.81	381.07
GSM1900	GPRS	512	1850.2	29.68	928.97
		661	1880	30.00	1000.00
		810	1909.8	29.31	853.10
	EGPRS	512	1850.2	26.20	416.87
		661	1880	25.94	392.64
		810	1909.8	25.01	316.96

WCDMA

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
Band 5	REL99	4132	826.4	20.97	125.03
		4183	836.6	22.02	159.22
		4233	846.6	22.82	191.43
	HSDPA	4132	826.4	19.96	99.08
		4183	836.6	20.88	122.46
		4233	846.6	21.46	139.96
Band 4	REL99	1312	1712.4	22.51	178.24
		1413	1732.6	23.21	209.41
		1513	1752.6	23.82	240.99
	HSDPA	1312	1712.4	22.08	161.44
		1413	1732.6	22.73	187.50
		1513	1752.6	23.25	211.35
Band 2	REL99	9262	1852.4	22.88	194.09
		9400	1880.0	22.92	195.88
		9538	1907.6	22.43	174.98
	HSDPA	9262	1852.4	22.46	176.20
		9400	1880.0	22.50	177.83
		9538	1907.6	21.73	148.94

LTE Band 12

Band	BW [MHz]	Mode	RB Size/	f [MHz]	ERP / EIRP	
			RB Offset		[dBm]	[mW]
Band 12	10	QPSK	1/0	704.0	18.68	73.79
			1/0	707.5	18.64	73.11
			1/49	711.0	18.23	66.53
		16QAM	1/0	704.0	17.53	56.62
			1/25	707.5	17.36	54.45
			1/25	711.0	17.03	50.47
	5	QPSK	1/24	701.5	18.74	74.82
			1/24	707.5	18.34	68.23
			1/24	713.5	18.19	65.92
		16QAM	1/0	701.5	17.55	56.89
			1/24	707.5	17.16	52.00
			1/0	713.5	17.15	51.88
	3	QPSK	1/0	700.5	19.04	80.17
			1/14	707.5	18.24	66.68
			1/14	714.5	17.79	60.12
		16QAM	1/14	700.5	17.52	56.49
			1/8	707.5	16.94	49.43
			1/0	714.5	16.99	50.00
	1.4	QPSK	1/3	699.7	18.54	71.45
			1/0	707.5	18.63	72.95
			1/5	715.3	18.09	64.42
		16QAM	1/3	699.7	17.50	56.23
			1/5	707.5	17.21	52.60
			1/5	715.3	16.93	49.32

LTE Band 13

Band	BW [MHz]	Mode	RB size / RB Offset	f [MHz]	ERP / EIRP	
					[dBm]	[mW]
Band 13	10	QPSK	1/49	782.0	16.74	47.21
		16QAM	1/0	782.0	16.44	44.06
	5	QPSK	1/0	779.5	17.59	57.41
			1/24	782.0	18.94	78.34
			1/24	784.5	16.92	49.20
		16QAM	1/0	779.5	16.36	43.25
	1/0		782.0	16.15	41.21	
	1/24	784.5	15.67	36.90		

LTE Band 25

Band	BW [MHz]	Mode	RB Size/	f [MHz]	ERP / EIRP	
			RB Offset		[dBm]	[mW]
Band 25	20	QPSK	1/49	1860.0	24.05	254.10
			1/49	1882.5	23.55	226.46
			1/49	1905.0	23.91	246.04
		16QAM	1/99	1860.0	22.82	191.43
			1/0	1882.5	22.06	160.69
			1/0	1905.0	23.46	221.82
	15	QPSK	1/0	1857.5	23.76	237.68
			1/0	1882.5	23.20	208.93
			1/0	1907.5	24.44	277.97
		16QAM	1/74	1857.5	23.55	226.46
			1/0	1882.5	22.13	163.31
			1/74	1907.5	22.91	195.43
	10	QPSK	1/49	1855.0	24.29	268.53
			1/0	1882.5	23.37	217.27
			1/0	1910.0	24.36	272.90
		16QAM	1/0	1855.0	22.59	181.55
			1/49	1882.5	22.05	160.32
			1/49	1910.0	22.84	192.31
	5	QPSK	1/24	1852.5	23.81	240.44
			1/24	1882.5	23.40	218.78
			1/24	1912.5	23.39	218.27
		16QAM	1/0	1852.5	22.95	197.24
			1/0	1882.5	22.33	171.00
			1/24	1912.5	22.25	167.88
	3	QPSK	1/14	1851.5	22.51	178.24
			1/14	1882.5	23.13	205.59
			1/14	1913.5	23.65	231.74
		16QAM	1/14	1851.5	21.84	152.76
			1/0	1882.5	21.97	157.40
			1/8	1913.5	22.32	170.61
1.4	QPSK	1/5	1850.7	23.83	241.55	
		1/5	1882.5	23.40	218.78	
		1/5	1914.3	23.44	220.80	
	16QAM	1/0	1850.7	22.55	179.89	
		1/0	1882.5	22.21	166.34	
		1/5	1914.3	22.37	172.58	

LTE Band 26

Band	BW [MHz]	Mode	RB Size/	f [MHz]	ERP/EIRP	
			RB Offset		[dBm]	[mW]
Band 26	15	QPSK	1/0	821.5	19.87	97.05
			1/0	831.5	22.17	164.82
			1/0	841.5	22.30	169.82
		16QAM	1/0	821.5	18.79	75.68
			1/0	831.5	21.18	131.22
			1/0	841.5	21.24	133.05
	10	QPSK	1/49	819.0	19.80	95.50
			1/0	829.0	20.11	102.57
			1/0	831.5	22.51	178.24
			1/25	844.0	22.65	184.08
		16QAM	1/0	819.0	17.86	61.09
			1/25	829.0	19.31	85.31
			1/25	831.5	21.48	140.60
			1/0	844.0	21.65	146.22
	5	QPSK	1/24	816.5	19.08	80.91
			1/0	821.5	18.62	72.78
			1/24	826.5	20.07	101.62
			1/24	831.5	21.95	156.68
			1/24	846.5	21.39	137.72
		16QAM	1/0	816.5	17.71	59.02
			1/0	821.5	17.88	61.38
			1/0	826.5	18.91	77.80
			1/24	831.5	20.66	116.41
			1/0	846.5	20.00	100.00
	3	QPSK	1/14	815.5	18.69	73.96
			1/0	822.5	18.86	76.91
			1/14	825.5	19.62	91.62
			1/0	831.5	21.53	142.23
			1/14	847.5	21.29	134.59
		16QAM	1/0	815.5	17.50	56.23
			1/0	822.5	17.90	61.66
			1/14	825.5	18.85	76.74
			1/0	831.5	20.66	116.41
			1/8	847.5	19.92	98.17
	1.4	QPSK	1/0	814.7	18.57	71.94
			1/5	823.3	19.26	84.33
			1/5	824.7	19.43	87.70
			1/5	831.5	21.48	140.60
			1/5	848.3	21.32	135.52
		16QAM	1/5	814.7	17.32	53.95
			1/5	823.3	18.25	66.83
			1/3	824.7	18.36	68.55
1/5			831.5	20.41	109.90	
1/3			848.3	19.82	95.94	

LTE Band 41 (PC2)

Band	BW [MHz]	Mode	RB Size/	f [MHz]	ERP / EIRP	
			RB Offset		[dBm]	[mW]
Band 41	20	QPSK	1/0	2506.0	21.41	138.36
			1/49	2593.0	23.68	233.35
			1/49	2680.0	23.00	199.53
		16QAM	1/0	2506.0	21.07	127.94
			1/0	2593.0	22.99	199.07
			1/0	2680.0	22.09	161.81
	15	QPSK	1/37	2503.5	21.85	153.11
			1/37	2593.0	23.49	223.36
			1/74	2682.5	21.98	157.76
		16QAM	1/0	2503.5	21.61	144.88
			1/0	2593.0	23.04	201.37
			1/37	2682.5	21.73	148.94
	10	QPSK	1/0	2501.0	22.01	158.85
			1/0	2593.0	23.02	200.45
			1/0	2685.0	22.30	169.82
		16QAM	1/49	2501.0	21.46	139.96
			1/0	2593.0	22.57	180.72
			1/49	2685.0	21.45	139.64
	5	QPSK	1/0	2498.5	21.88	154.17
			1/12	2593.0	23.49	223.36
			1/12	2687.5	21.98	157.76
16QAM		1/12	2498.5	22.05	160.32	
		1/12	2593.0	22.73	187.50	
		1/12	2687.5	21.78	150.66	

LTE Band 66

Band	BW [MHz]	Mode	RB Size/	f [MHz]	ERP / EIRP	
			RB Offset		[dBm]	[mW]
Band 66	20	QPSK	1/0	1720.0	21.87	153.82
			1/49	1745.0	23.62	230.14
			1/99	1770.0	22.73	187.50
		16QAM	1/0	1720.0	20.55	113.50
			1/0	1745.0	22.68	185.35
			1/49	1770.0	21.87	153.82
	15	QPSK	1/74	1717.5	23.04	201.37
			1/0	1747.5	23.54	225.94
			1/37	1772.5	23.14	206.06
		16QAM	1/0	1717.5	21.87	153.82
			1/0	1747.5	22.11	162.55
			1/0	1772.5	21.98	157.76
	10	QPSK	1/49	1715.0	22.67	184.93
			1/0	1745.0	23.29	213.30
			1/49	1775.0	22.94	196.79
		16QAM	1/0	1715.0	21.68	147.23
			1/0	1745.0	22.49	177.42
			1/0	1775.0	21.55	142.89
	5	QPSK	1/24	1712.5	22.36	172.19
			1/12	1745.0	23.57	227.51
			1/12	1777.5	22.67	184.93
		16QAM	1/0	1712.5	21.17	130.92
			1/0	1745.0	22.28	169.04
			1/0	1777.5	21.70	147.91
	3	QPSK	1/0	1711.5	22.16	164.44
			1/0	1745.0	23.09	203.70
			1/14	1778.5	22.95	197.24
16QAM		1/8	1711.5	20.70	117.49	
		1/0	1745.0	21.88	154.17	
		1/8	1778.5	21.65	146.22	
1.4	QPSK	1/5	1710.7	22.05	160.32	
		1/0	1745.0	23.69	233.88	
		1/0	1779.3	23.19	208.45	
	16QAM	1/0	1710.7	21.57	143.55	
		1/3	1745.0	22.10	162.18	
		1/0	1779.3	21.82	152.05	

LTE Band 2

LTE Band 2(Frequency range: 1850-1910 MHz) is covered by LTE Band 25 (Frequency range: 1850-1915 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 4

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 5

LTE Band 5 (Frequency range: 824-849 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 17

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band41(PC3)

LTE Band 41(PC3, Frequency range : 2496-2690 MHz) is covered by LTE Band 41(PC2) (Frequency range: 2496-2690 MHz) due to same frequency range, same channel bandwidth and maximum tune-up limit is higher than LTE Band41(PC3).

5G NR Band n5

Band	BW [MHz]	Modulation	Mode	RB Size/	f [MHz]	ERP / EIRP	
				RB Offset		[dBm]	[mW]
n5	20	DFT-s OFDM	QPSK	1/53	834.0	18.76	75.16
				1/104	836.5	19.20	83.18
				1/53	839.0	18.81	76.03
			16QAM	1/53	834.0	18.35	68.39
				1/104	836.5	18.26	66.99
				1/53	839.0	18.03	63.53
	15	DFT-s OFDM	QPSK	1/39	831.5	18.93	78.16
				1/39	836.5	18.60	72.44
				1/39	841.5	18.55	71.61
			16QAM	1/39	831.5	18.19	65.92
				1/39	836.5	18.45	69.98
				1/39	841.5	18.31	67.76
	10	DFT-s OFDM	QPSK	1/26	829.0	18.14	65.16
				1/50	836.5	18.69	73.96
				1/26	844.0	18.84	76.56
			16QAM	1/26	829.0	17.31	53.83
				1/50	836.5	18.45	69.98
				1/26	844.0	18.06	63.97
	5	DFT-s OFDM	QPSK	1/23	826.5	16.72	46.99
				1/23	836.5	18.77	75.34
				1/23	846.5	18.23	66.53
16QAM			1/23	826.5	15.83	38.28	
			1/23	836.5	16.70	46.77	
			1/23	846.5	17.91	61.80	

5G NR Band n66

Band	BW [MHz]	Modulation	Mode	RB Size/	f [MHz]	ERP / EIRP	
				RB Offset		[dBm]	[mW]
n66	20	DFT-s OFDM	QPSK	1/53	1720.0	21.35	136.46
				1/53	1745.0	22.52	178.65
				1/53	1770.0	21.67	146.89
			16QAM	1/53	1720.0	20.83	121.06
				1/53	1745.0	21.82	152.05
				1/53	1770.0	21.39	137.72
	15	DFT-s OFDM	QPSK	1/1	1717.5	21.20	131.83
				1/39	1745.0	22.39	173.38
				1/39	1772.5	21.85	153.11
			16QAM	1/1	1717.5	20.42	110.15
				1/39	1745.0	22.08	161.44
				1/39	1772.5	21.18	131.22
	10	DFT-s OFDM	QPSK	1/26	1715.0	21.81	151.71
				1/26	1745.0	22.39	173.38
				1/26	1775.0	21.74	149.28
			16QAM	1/26	1715.0	21.25	133.35
				1/26	1745.0	21.66	146.55
				1/26	1775.0	21.04	127.06
	5	DFT-s OFDM	QPSK	1/1	1712.5	21.04	127.06
				1/23	1745.0	22.70	186.21
				1/23	1777.5	22.15	164.06
			16QAM	1/1	1712.5	20.72	118.03
				1/23	1745.0	21.59	144.21
				1/23	1777.5	21.39	137.72

9.5.2. ERP/EIRP DATA

GSM850

GSM850 GPRS	<p>UL Verification Services, Inc. High Frequency Substitution Measurement</p> <p>Company: Samsung Project #: 4789651209 Date: 2020-10-12 Test Engineer: 20896 Configuration: EUT / Z-Position Location: Chamber 1 Mode: GPRS 850 MHz Fundamentals</p> <p>Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>824.20</td> <td>35.27</td> <td>V</td> <td>3.0</td> <td>-1.0</td> <td>31.28</td> <td>38.5</td> <td>-7.2</td> <td></td> </tr> <tr> <td>824.20</td> <td>21.36</td> <td>H</td> <td>3.0</td> <td>-1.0</td> <td>17.36</td> <td>38.5</td> <td>-21.1</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.60</td> <td>36.21</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>32.24</td> <td>38.5</td> <td>-6.3</td> <td></td> </tr> <tr> <td>836.60</td> <td>21.43</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>17.47</td> <td>38.5</td> <td>-21.0</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>848.80</td> <td>35.56</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>31.62</td> <td>38.5</td> <td>-6.9</td> <td></td> </tr> <tr> <td>848.80</td> <td>24.68</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>20.74</td> <td>38.5</td> <td>-17.8</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									824.20	35.27	V	3.0	-1.0	31.28	38.5	-7.2		824.20	21.36	H	3.0	-1.0	17.36	38.5	-21.1		Mid Ch									836.60	36.21	V	3.1	-0.9	32.24	38.5	-6.3		836.60	21.43	H	3.1	-0.9	17.47	38.5	-21.0		High Ch									848.80	35.56	V	3.1	-0.9	31.62	38.5	-6.9		848.80	24.68	H	3.1	-0.9	20.74	38.5	-17.8	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																		
Low Ch																																																																																											
824.20	35.27	V	3.0	-1.0	31.28	38.5	-7.2																																																																																				
824.20	21.36	H	3.0	-1.0	17.36	38.5	-21.1																																																																																				
Mid Ch																																																																																											
836.60	36.21	V	3.1	-0.9	32.24	38.5	-6.3																																																																																				
836.60	21.43	H	3.1	-0.9	17.47	38.5	-21.0																																																																																				
High Ch																																																																																											
848.80	35.56	V	3.1	-0.9	31.62	38.5	-6.9																																																																																				
848.80	24.68	H	3.1	-0.9	20.74	38.5	-17.8																																																																																				
GSM850 EGPRS	<p>UL Verification Services, Inc. High Frequency Substitution Measurement</p> <p>Company: Samsung Project #: 4789651209 Date: 2020-10-12 Test Engineer: 20896 Configuration: EUT / Z-Position Location: Chamber 1 Mode: EGPRS 850 MHz Fundamentals</p> <p>Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>824.20</td> <td>28.50</td> <td>V</td> <td>3.0</td> <td>-1.0</td> <td>24.51</td> <td>38.5</td> <td>-14.0</td> <td></td> </tr> <tr> <td>824.20</td> <td>14.82</td> <td>H</td> <td>3.0</td> <td>-1.0</td> <td>10.82</td> <td>38.5</td> <td>-27.7</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.60</td> <td>29.44</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>25.47</td> <td>38.5</td> <td>-13.0</td> <td></td> </tr> <tr> <td>836.60</td> <td>14.84</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>10.88</td> <td>38.5</td> <td>-27.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>848.80</td> <td>29.75</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>25.81</td> <td>38.5</td> <td>-12.7</td> <td></td> </tr> <tr> <td>848.80</td> <td>18.54</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>14.60</td> <td>38.5</td> <td>-23.9</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									824.20	28.50	V	3.0	-1.0	24.51	38.5	-14.0		824.20	14.82	H	3.0	-1.0	10.82	38.5	-27.7		Mid Ch									836.60	29.44	V	3.1	-0.9	25.47	38.5	-13.0		836.60	14.84	H	3.1	-0.9	10.88	38.5	-27.6		High Ch									848.80	29.75	V	3.1	-0.9	25.81	38.5	-12.7		848.80	18.54	H	3.1	-0.9	14.60	38.5	-23.9	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																			
Low Ch																																																																																											
824.20	28.50	V	3.0	-1.0	24.51	38.5	-14.0																																																																																				
824.20	14.82	H	3.0	-1.0	10.82	38.5	-27.7																																																																																				
Mid Ch																																																																																											
836.60	29.44	V	3.1	-0.9	25.47	38.5	-13.0																																																																																				
836.60	14.84	H	3.1	-0.9	10.88	38.5	-27.6																																																																																				
High Ch																																																																																											
848.80	29.75	V	3.1	-0.9	25.81	38.5	-12.7																																																																																				
848.80	18.54	H	3.1	-0.9	14.60	38.5	-23.9																																																																																				

GSM1900

GSM1900 GPRS	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-10-12 Test Engineer: 20896 Configuration: EUT, Z-Position Location: Chamber 1 Mode: GPRS 1900 MHz Fundamentals Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1850.20	20.09	V	4.5	9.6	25.20	33.0	-7.8	
	1850.20	24.57	H	4.5	9.6	29.68	33.0	-3.3	
	Mid Ch								
	1880.00	20.41	V	4.5	9.4	25.26	33.0	-7.7	
	1880.00	25.15	H	4.5	9.4	30.00	33.0	-3.0	
	High Ch								
	1909.80	21.28	V	4.6	9.1	25.84	33.0	-7.2	
	1909.80	24.74	H	4.6	9.1	29.31	33.0	-3.7	

GSM1900 EGPRS	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-10-12 Test Engineer: 20896 Configuration: EUT, Z-Position Location: Chamber 1 Mode: EGPRS 1900 MHz Fundamentals Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1850.20	16.80	V	4.5	9.6	21.91	33.0	-11.1	
	1850.20	21.09	H	4.5	9.6	26.20	33.0	-6.8	
	Mid Ch								
	1880.00	16.21	V	4.5	9.4	21.06	33.0	-11.9	
	1880.00	21.09	H	4.5	9.4	25.94	33.0	-7.1	
	High Ch								
	1909.80	17.17	V	4.6	9.1	21.73	33.0	-11.3	
	1909.80	20.44	H	4.6	9.1	25.01	33.0	-8.0	

WCDMA Band 5

WCDMA Band 5 REL99	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																
	Company:		Samsung																																																																																														
	Project #:		4789651209																																																																																														
	Date:		2020-10-16																																																																																														
	Test Engineer:		20882																																																																																														
	Configuration:		EUT, Z-Position																																																																																														
	Location:		Chamber 2																																																																																														
	Mode:		Rel99 Band 5 Fundamentals																																																																																														
	Test Equipment:																																																																																																
	Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>826.40</td> <td>24.96</td> <td>V</td> <td>3.0</td> <td>-0.9</td> <td>20.97</td> <td>38.5</td> <td>-17.5</td> <td></td> </tr> <tr> <td>826.40</td> <td>13.53</td> <td>H</td> <td>3.0</td> <td>-0.9</td> <td>9.54</td> <td>38.5</td> <td>-29.0</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.60</td> <td>25.98</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>22.02</td> <td>38.5</td> <td>-16.5</td> <td></td> </tr> <tr> <td>836.60</td> <td>13.46</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>9.50</td> <td>38.5</td> <td>-29.0</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>846.60</td> <td>26.77</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>22.82</td> <td>38.5</td> <td>-15.7</td> <td></td> </tr> <tr> <td>846.60</td> <td>14.11</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>10.16</td> <td>38.5</td> <td>-28.3</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									826.40	24.96	V	3.0	-0.9	20.97	38.5	-17.5		826.40	13.53	H	3.0	-0.9	9.54	38.5	-29.0		Mid Ch									836.60	25.98	V	3.1	-0.9	22.02	38.5	-16.5		836.60	13.46	H	3.1	-0.9	9.50	38.5	-29.0		High Ch									846.60	26.77	V	3.1	-0.9	22.82	38.5	-15.7		846.60	14.11	H	3.1	-0.9	10.16	38.5	-28.3	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																	
826.40	24.96	V	3.0	-0.9	20.97	38.5	-17.5																																																																																										
826.40	13.53	H	3.0	-0.9	9.54	38.5	-29.0																																																																																										
Mid Ch																																																																																																	
836.60	25.98	V	3.1	-0.9	22.02	38.5	-16.5																																																																																										
836.60	13.46	H	3.1	-0.9	9.50	38.5	-29.0																																																																																										
High Ch																																																																																																	
846.60	26.77	V	3.1	-0.9	22.82	38.5	-15.7																																																																																										
846.60	14.11	H	3.1	-0.9	10.16	38.5	-28.3																																																																																										

WCDMA Band 5 HSDPA	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																
	Company:		Samsung																																																																																														
	Project #:		4789651209																																																																																														
	Date:		2020-10-16																																																																																														
	Test Engineer:		20882																																																																																														
	Configuration:		EUT, Z-Position																																																																																														
	Location:		Chamber 2																																																																																														
	Mode:		HSDPA Band 5 Fundamentals																																																																																														
	Test Equipment:																																																																																																
	Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>826.40</td> <td>23.95</td> <td>V</td> <td>3.0</td> <td>-0.9</td> <td>19.96</td> <td>38.5</td> <td>-18.5</td> <td></td> </tr> <tr> <td>826.40</td> <td>12.90</td> <td>H</td> <td>3.0</td> <td>-0.9</td> <td>8.91</td> <td>38.5</td> <td>-29.6</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.60</td> <td>24.84</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>20.88</td> <td>38.5</td> <td>-17.6</td> <td></td> </tr> <tr> <td>836.60</td> <td>12.00</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>8.04</td> <td>38.5</td> <td>-30.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>846.60</td> <td>25.41</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>21.46</td> <td>38.5</td> <td>-17.0</td> <td></td> </tr> <tr> <td>846.60</td> <td>12.90</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>8.95</td> <td>38.5</td> <td>-29.5</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									826.40	23.95	V	3.0	-0.9	19.96	38.5	-18.5		826.40	12.90	H	3.0	-0.9	8.91	38.5	-29.6		Mid Ch									836.60	24.84	V	3.1	-0.9	20.88	38.5	-17.6		836.60	12.00	H	3.1	-0.9	8.04	38.5	-30.5		High Ch									846.60	25.41	V	3.1	-0.9	21.46	38.5	-17.0		846.60	12.90	H	3.1	-0.9	8.95	38.5	-29.5	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																	
826.40	23.95	V	3.0	-0.9	19.96	38.5	-18.5																																																																																										
826.40	12.90	H	3.0	-0.9	8.91	38.5	-29.6																																																																																										
Mid Ch																																																																																																	
836.60	24.84	V	3.1	-0.9	20.88	38.5	-17.6																																																																																										
836.60	12.00	H	3.1	-0.9	8.04	38.5	-30.5																																																																																										
High Ch																																																																																																	
846.60	25.41	V	3.1	-0.9	21.46	38.5	-17.0																																																																																										
846.60	12.90	H	3.1	-0.9	8.95	38.5	-29.5																																																																																										

WCDMA Band 4

WCDMA Band 4 REL99	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																
	Company:		Samsung																																																																																														
	Project #:		4789651209																																																																																														
	Date:		2020-10-16																																																																																														
	Test Engineer:		22943																																																																																														
	Configuration:		EUT, X-Position																																																																																														
	Location:		Chamber 2																																																																																														
	Mode:		Rel99 Band 4 Fundamentals																																																																																														
	Test Equipment:																																																																																																
	Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1712.40</td> <td>11.32</td> <td>V</td> <td>4.3</td> <td>9.6</td> <td>16.58</td> <td>30.0</td> <td>-13.4</td> <td></td> </tr> <tr> <td>1712.40</td> <td>17.25</td> <td>H</td> <td>4.3</td> <td>9.6</td> <td>22.51</td> <td>30.0</td> <td>-7.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.60</td> <td>11.60</td> <td>V</td> <td>4.3</td> <td>9.6</td> <td>16.89</td> <td>30.0</td> <td>-13.1</td> <td></td> </tr> <tr> <td>1732.60</td> <td>17.92</td> <td>H</td> <td>4.3</td> <td>9.6</td> <td>23.21</td> <td>30.0</td> <td>-6.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1752.60</td> <td>12.97</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>18.31</td> <td>30.0</td> <td>-11.7</td> <td></td> </tr> <tr> <td>1752.60</td> <td>18.48</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>23.82</td> <td>30.0</td> <td>-6.2</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1712.40	11.32	V	4.3	9.6	16.58	30.0	-13.4		1712.40	17.25	H	4.3	9.6	22.51	30.0	-7.5		Mid Ch									1732.60	11.60	V	4.3	9.6	16.89	30.0	-13.1		1732.60	17.92	H	4.3	9.6	23.21	30.0	-6.8		High Ch									1752.60	12.97	V	4.4	9.7	18.31	30.0	-11.7		1752.60	18.48	H	4.4	9.7	23.82	30.0	-6.2	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																	
1712.40	11.32	V	4.3	9.6	16.58	30.0	-13.4																																																																																										
1712.40	17.25	H	4.3	9.6	22.51	30.0	-7.5																																																																																										
Mid Ch																																																																																																	
1732.60	11.60	V	4.3	9.6	16.89	30.0	-13.1																																																																																										
1732.60	17.92	H	4.3	9.6	23.21	30.0	-6.8																																																																																										
High Ch																																																																																																	
1752.60	12.97	V	4.4	9.7	18.31	30.0	-11.7																																																																																										
1752.60	18.48	H	4.4	9.7	23.82	30.0	-6.2																																																																																										

WCDMA Band 4 HSDPA	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																
	Company:		Samsung																																																																																														
	Project #:		4789651209																																																																																														
	Date:		2020-10-16																																																																																														
	Test Engineer:		22943																																																																																														
	Configuration:		EUT, X-Position																																																																																														
	Location:		Chamber 2																																																																																														
	Mode:		HSDPA Band 4 Fundamentals																																																																																														
	Test Equipment:																																																																																																
	Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1712.40</td> <td>11.19</td> <td>V</td> <td>4.3</td> <td>9.6</td> <td>16.45</td> <td>30.0</td> <td>-13.5</td> <td></td> </tr> <tr> <td>1712.40</td> <td>16.82</td> <td>H</td> <td>4.3</td> <td>9.6</td> <td>22.08</td> <td>30.0</td> <td>-7.9</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.60</td> <td>11.14</td> <td>V</td> <td>4.3</td> <td>9.6</td> <td>16.43</td> <td>30.0</td> <td>-13.6</td> <td></td> </tr> <tr> <td>1732.60</td> <td>17.44</td> <td>H</td> <td>4.3</td> <td>9.6</td> <td>22.73</td> <td>30.0</td> <td>-7.3</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1752.60</td> <td>12.13</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>17.47</td> <td>30.0</td> <td>-12.5</td> <td></td> </tr> <tr> <td>1752.60</td> <td>17.91</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>23.25</td> <td>30.0</td> <td>-6.8</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1712.40	11.19	V	4.3	9.6	16.45	30.0	-13.5		1712.40	16.82	H	4.3	9.6	22.08	30.0	-7.9		Mid Ch									1732.60	11.14	V	4.3	9.6	16.43	30.0	-13.6		1732.60	17.44	H	4.3	9.6	22.73	30.0	-7.3		High Ch									1752.60	12.13	V	4.4	9.7	17.47	30.0	-12.5		1752.60	17.91	H	4.4	9.7	23.25	30.0	-6.8	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																	
1712.40	11.19	V	4.3	9.6	16.45	30.0	-13.5																																																																																										
1712.40	16.82	H	4.3	9.6	22.08	30.0	-7.9																																																																																										
Mid Ch																																																																																																	
1732.60	11.14	V	4.3	9.6	16.43	30.0	-13.6																																																																																										
1732.60	17.44	H	4.3	9.6	22.73	30.0	-7.3																																																																																										
High Ch																																																																																																	
1752.60	12.13	V	4.4	9.7	17.47	30.0	-12.5																																																																																										
1752.60	17.91	H	4.4	9.7	23.25	30.0	-6.8																																																																																										

WCDMA Band 2

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
UL Verification Services, Inc.								
High Frequency Substitution Measurement								
Company: Samsung								
Project #: 4789651209								
Date: 2020-10-16								
Test Engineer: 20882								
Configuration: EUT, Y-Position								
Location: Chamber 2								
Mode: Rel99 Band 2 Fundamentals								
Test Equipment:								
Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables								
Substitution: Horn 3115[00161451], 8.5m SMA-type Cable								
Low Ch								
1852.40	17.76	V	4.5	9.6	22.88	33.0	-10.1	
1852.40	11.75	H	4.5	9.6	16.87	33.0	-16.1	
Mid Ch								
1880.00	18.08	V	4.5	9.4	22.92	33.0	-10.1	
1880.00	10.85	H	4.5	9.4	15.68	33.0	-17.3	
High Ch								
1907.60	17.90	V	4.6	9.1	22.43	33.0	-10.6	
1907.60	11.42	H	4.6	9.1	15.96	33.0	-17.0	

WCDMA
 Band 2
 REL99

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
UL Verification Services, Inc.								
High Frequency Substitution Measurement								
Company: Samsung								
Project #: 4789651209								
Date: 2020-10-16								
Test Engineer: 20882								
Configuration: EUT, Y-Position								
Location: Chamber 2								
Mode: HSDPA Band 2 Fundamentals								
Test Equipment:								
Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables								
Substitution: Horn 3115[00161451], 8.5m SMA-type Cable								
Low Ch								
1852.40	17.34	V	4.5	9.6	22.46	33.0	-10.5	
1852.40	11.28	H	4.5	9.6	16.40	33.0	-16.6	
Mid Ch								
1880.00	17.66	V	4.5	9.4	22.50	33.0	-10.5	
1880.00	10.19	H	4.5	9.4	15.02	33.0	-18.0	
High Ch								
1907.60	17.20	V	4.6	9.1	21.73	33.0	-11.3	
1907.60	10.86	H	4.6	9.1	15.40	33.0	-17.6	

WCDMA
 Band 2
 HSDPA

LTE Band 12

LTE Band 12 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company:		Samsung																																																																																															
	Project #:		4789651209																																																																																															
	Date:		2020-10-19																																																																																															
	Test Engineer:		22943																																																																																															
	Configuration:		EUT, Z-Position																																																																																															
	Location:		Chamber 2																																																																																															
	Mode:		LTE_QPSK Band 12 Fundamentals, 10MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>704.00</td> <td>22.55</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>18.68</td> <td>34.8</td> <td>-16.1</td> <td></td> </tr> <tr> <td>704.00</td> <td>4.11</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>0.24</td> <td>34.8</td> <td>-34.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>22.51</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>18.64</td> <td>34.8</td> <td>-16.1</td> <td></td> </tr> <tr> <td>707.50</td> <td>4.11</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>0.24</td> <td>34.8</td> <td>-34.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>711.00</td> <td>22.11</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>18.23</td> <td>34.8</td> <td>-16.5</td> <td></td> </tr> <tr> <td>711.00</td> <td>7.23</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>3.35</td> <td>34.8</td> <td>-31.4</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									704.00	22.55	V	2.8	-1.1	18.68	34.8	-16.1		704.00	4.11	H	2.8	-1.1	0.24	34.8	-34.5		Mid Ch									707.50	22.51	V	2.8	-1.1	18.64	34.8	-16.1		707.50	4.11	H	2.8	-1.1	0.24	34.8	-34.5		High Ch									711.00	22.11	V	2.8	-1.1	18.23	34.8	-16.5		711.00	7.23	H	2.8	-1.1	3.35	34.8	-31.4
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
704.00	22.55	V	2.8	-1.1	18.68	34.8	-16.1																																																																																											
704.00	4.11	H	2.8	-1.1	0.24	34.8	-34.5																																																																																											
Mid Ch																																																																																																		
707.50	22.51	V	2.8	-1.1	18.64	34.8	-16.1																																																																																											
707.50	4.11	H	2.8	-1.1	0.24	34.8	-34.5																																																																																											
High Ch																																																																																																		
711.00	22.11	V	2.8	-1.1	18.23	34.8	-16.5																																																																																											
711.00	7.23	H	2.8	-1.1	3.35	34.8	-31.4																																																																																											

LTE Band 12 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company:		Samsung																																																																																															
	Project #:		4789651209																																																																																															
	Date:		2020-10-19																																																																																															
	Test Engineer:		22943																																																																																															
	Configuration:		EUT, Z-Position																																																																																															
	Location:		Chamber 2																																																																																															
	Mode:		LTE_16QAM Band 12 Fundamentals, 10MHz Bandwidth																																																																																															
	Test Equipment:		Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																															
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>704.00</td> <td>21.40</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>17.53</td> <td>34.8</td> <td>-17.2</td> <td></td> </tr> <tr> <td>704.00</td> <td>3.04</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>-0.83</td> <td>34.8</td> <td>-35.6</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>21.23</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>17.36</td> <td>34.8</td> <td>-17.4</td> <td></td> </tr> <tr> <td>707.50</td> <td>2.96</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>-0.91</td> <td>34.8</td> <td>-35.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>711.00</td> <td>20.91</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>17.03</td> <td>34.8</td> <td>-17.7</td> <td></td> </tr> <tr> <td>711.00</td> <td>5.88</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>2.00</td> <td>34.8</td> <td>-32.8</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									704.00	21.40	V	2.8	-1.1	17.53	34.8	-17.2		704.00	3.04	H	2.8	-1.1	-0.83	34.8	-35.6		Mid Ch									707.50	21.23	V	2.8	-1.1	17.36	34.8	-17.4		707.50	2.96	H	2.8	-1.1	-0.91	34.8	-35.7		High Ch									711.00	20.91	V	2.8	-1.1	17.03	34.8	-17.7		711.00	5.88	H	2.8	-1.1	2.00	34.8	-32.8
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
704.00	21.40	V	2.8	-1.1	17.53	34.8	-17.2																																																																																											
704.00	3.04	H	2.8	-1.1	-0.83	34.8	-35.6																																																																																											
Mid Ch																																																																																																		
707.50	21.23	V	2.8	-1.1	17.36	34.8	-17.4																																																																																											
707.50	2.96	H	2.8	-1.1	-0.91	34.8	-35.7																																																																																											
High Ch																																																																																																		
711.00	20.91	V	2.8	-1.1	17.03	34.8	-17.7																																																																																											
711.00	5.88	H	2.8	-1.1	2.00	34.8	-32.8																																																																																											

LTE Band 12 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-19																																																																																																	
	Test Engineer: 22943																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_QPSK Band 12 Fundamentals, 5MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>701.50</td> <td>22.60</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>18.74</td> <td>34.8</td> <td>-16.0</td> <td></td> </tr> <tr> <td>701.50</td> <td>3.64</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>-0.22</td> <td>34.8</td> <td>-35.0</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>22.21</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>18.34</td> <td>34.8</td> <td>-16.4</td> <td></td> </tr> <tr> <td>707.50</td> <td>6.45</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>2.58</td> <td>34.8</td> <td>-32.2</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>713.50</td> <td>22.07</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>18.19</td> <td>34.8</td> <td>-16.6</td> <td></td> </tr> <tr> <td>713.50</td> <td>7.38</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>3.49</td> <td>34.8</td> <td>-31.3</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									701.50	22.60	V	2.8	-1.1	18.74	34.8	-16.0		701.50	3.64	H	2.8	-1.1	-0.22	34.8	-35.0		Mid Ch									707.50	22.21	V	2.8	-1.1	18.34	34.8	-16.4		707.50	6.45	H	2.8	-1.1	2.58	34.8	-32.2		High Ch									713.50	22.07	V	2.8	-1.1	18.19	34.8	-16.6		713.50	7.38	H	2.8	-1.1	3.49	34.8	-31.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
701.50	22.60	V	2.8	-1.1	18.74	34.8	-16.0																																																																																											
701.50	3.64	H	2.8	-1.1	-0.22	34.8	-35.0																																																																																											
Mid Ch																																																																																																		
707.50	22.21	V	2.8	-1.1	18.34	34.8	-16.4																																																																																											
707.50	6.45	H	2.8	-1.1	2.58	34.8	-32.2																																																																																											
High Ch																																																																																																		
713.50	22.07	V	2.8	-1.1	18.19	34.8	-16.6																																																																																											
713.50	7.38	H	2.8	-1.1	3.49	34.8	-31.3																																																																																											
LTE Band 12 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-19																																																																																																	
	Test Engineer: 22943																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_16QAM Band 12 Fundamentals, 5MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>701.50</td> <td>21.41</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>17.55</td> <td>34.8</td> <td>-17.2</td> <td></td> </tr> <tr> <td>701.50</td> <td>2.51</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>-1.35</td> <td>34.8</td> <td>-36.1</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>21.03</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>17.16</td> <td>34.8</td> <td>-17.6</td> <td></td> </tr> <tr> <td>707.50</td> <td>5.27</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>1.40</td> <td>34.8</td> <td>-33.4</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>713.50</td> <td>21.03</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>17.15</td> <td>34.8</td> <td>-17.6</td> <td></td> </tr> <tr> <td>713.50</td> <td>6.17</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>2.28</td> <td>34.8</td> <td>-32.5</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									701.50	21.41	V	2.8	-1.1	17.55	34.8	-17.2		701.50	2.51	H	2.8	-1.1	-1.35	34.8	-36.1		Mid Ch									707.50	21.03	V	2.8	-1.1	17.16	34.8	-17.6		707.50	5.27	H	2.8	-1.1	1.40	34.8	-33.4		High Ch									713.50	21.03	V	2.8	-1.1	17.15	34.8	-17.6		713.50	6.17	H	2.8	-1.1	2.28	34.8	-32.5
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
701.50	21.41	V	2.8	-1.1	17.55	34.8	-17.2																																																																																											
701.50	2.51	H	2.8	-1.1	-1.35	34.8	-36.1																																																																																											
Mid Ch																																																																																																		
707.50	21.03	V	2.8	-1.1	17.16	34.8	-17.6																																																																																											
707.50	5.27	H	2.8	-1.1	1.40	34.8	-33.4																																																																																											
High Ch																																																																																																		
713.50	21.03	V	2.8	-1.1	17.15	34.8	-17.6																																																																																											
713.50	6.17	H	2.8	-1.1	2.28	34.8	-32.5																																																																																											

LTE Band 12 3MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-19																																																																																																	
	Test Engineer: 20882																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_QPSK Band 12 Fundamentals, 3MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>700.50</td> <td>22.89</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>19.04</td> <td>34.8</td> <td>-15.7</td> <td></td> </tr> <tr> <td>700.50</td> <td>2.68</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>-1.18</td> <td>34.8</td> <td>-35.9</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>22.14</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>18.27</td> <td>34.8</td> <td>-16.5</td> <td></td> </tr> <tr> <td>707.50</td> <td>4.74</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>0.87</td> <td>34.8</td> <td>-33.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>714.50</td> <td>21.67</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>17.79</td> <td>34.8</td> <td>-17.0</td> <td></td> </tr> <tr> <td>714.50</td> <td>5.20</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>1.31</td> <td>34.8</td> <td>-33.5</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									700.50	22.89	V	2.8	-1.1	19.04	34.8	-15.7		700.50	2.68	H	2.8	-1.1	-1.18	34.8	-35.9		Mid Ch									707.50	22.14	V	2.8	-1.1	18.27	34.8	-16.5		707.50	4.74	H	2.8	-1.1	0.87	34.8	-33.9		High Ch									714.50	21.67	V	2.8	-1.1	17.79	34.8	-17.0		714.50	5.20	H	2.8	-1.1	1.31	34.8	-33.5
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
700.50	22.89	V	2.8	-1.1	19.04	34.8	-15.7																																																																																											
700.50	2.68	H	2.8	-1.1	-1.18	34.8	-35.9																																																																																											
Mid Ch																																																																																																		
707.50	22.14	V	2.8	-1.1	18.27	34.8	-16.5																																																																																											
707.50	4.74	H	2.8	-1.1	0.87	34.8	-33.9																																																																																											
High Ch																																																																																																		
714.50	21.67	V	2.8	-1.1	17.79	34.8	-17.0																																																																																											
714.50	5.20	H	2.8	-1.1	1.31	34.8	-33.5																																																																																											
LTE Band 12 3MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-19																																																																																																	
	Test Engineer: 22943																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_16QAM Band 12 Fundamentals, 3MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>700.50</td> <td>21.37</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>17.52</td> <td>34.8</td> <td>-17.3</td> <td></td> </tr> <tr> <td>700.50</td> <td>2.57</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>-1.29</td> <td>34.8</td> <td>-36.1</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>707.50</td> <td>20.81</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>16.94</td> <td>34.8</td> <td>-17.8</td> <td></td> </tr> <tr> <td>707.50</td> <td>2.60</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>-1.27</td> <td>34.8</td> <td>-36.0</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>714.50</td> <td>20.87</td> <td>V</td> <td>2.8</td> <td>-1.1</td> <td>16.99</td> <td>34.8</td> <td>-17.8</td> <td></td> </tr> <tr> <td>714.50</td> <td>3.93</td> <td>H</td> <td>2.8</td> <td>-1.1</td> <td>0.04</td> <td>34.8</td> <td>-34.7</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									700.50	21.37	V	2.8	-1.1	17.52	34.8	-17.3		700.50	2.57	H	2.8	-1.1	-1.29	34.8	-36.1		Mid Ch									707.50	20.81	V	2.8	-1.1	16.94	34.8	-17.8		707.50	2.60	H	2.8	-1.1	-1.27	34.8	-36.0		High Ch									714.50	20.87	V	2.8	-1.1	16.99	34.8	-17.8		714.50	3.93	H	2.8	-1.1	0.04	34.8	-34.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
700.50	21.37	V	2.8	-1.1	17.52	34.8	-17.3																																																																																											
700.50	2.57	H	2.8	-1.1	-1.29	34.8	-36.1																																																																																											
Mid Ch																																																																																																		
707.50	20.81	V	2.8	-1.1	16.94	34.8	-17.8																																																																																											
707.50	2.60	H	2.8	-1.1	-1.27	34.8	-36.0																																																																																											
High Ch																																																																																																		
714.50	20.87	V	2.8	-1.1	16.99	34.8	-17.8																																																																																											
714.50	3.93	H	2.8	-1.1	0.04	34.8	-34.7																																																																																											

LTE Band 12 1.4MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 22943 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 12 Fundamentals, 1.4MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	699.70	22.40	V	2.8	-1.1	18.54	34.8	-16.2	
	699.70	2.61	H	2.8	-1.1	-1.25	34.8	-36.0	
	Mid Ch								
	707.50	22.50	V	2.8	-1.1	18.63	34.8	-16.1	
	707.50	3.53	H	2.8	-1.1	-0.34	34.8	-35.1	
High Ch									
715.30	21.98	V	2.8	-1.1	18.09	34.8	-16.7		
715.30	7.72	H	2.8	-1.1	3.83	34.8	-30.9		
LTE Band 12 1.4MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 22943 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 12 Fundamentals, 1.4MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	699.70	21.36	V	2.8	-1.1	17.50	34.8	-17.3	
	699.70	1.41	H	2.8	-1.1	-2.45	34.8	-37.2	
	Mid Ch								
	707.50	21.08	V	2.8	-1.1	17.21	34.8	-17.6	
	707.50	2.37	H	2.8	-1.1	-1.50	34.8	-36.3	
High Ch									
715.30	20.82	V	2.8	-1.1	16.93	34.8	-17.8		
715.30	6.13	H	2.8	-1.1	2.24	34.8	-32.5		

LTE Band 13

LTE Band 13 10MHz QPSK	<p>UL Verification Services, Inc. High Frequency Substitution Measurement</p> <p>Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 20890 Configuration: EUT / Z-Position Location: Chamber 1 Mode: LTE_QPSK Band 13 Fundamentals, 10MHz Bandwidth</p> <p>Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>Mid Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>782.00</td> <td>20.76</td> <td>V</td> <td>3.0</td> <td>-1.1</td> <td>16.74</td> <td>34.8</td> <td>-18.0</td> <td></td> </tr> <tr> <td>782.00</td> <td>7.93</td> <td>H</td> <td>3.0</td> <td>-1.1</td> <td>3.91</td> <td>34.8</td> <td>-30.9</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Mid Ch									782.00	20.76	V	3.0	-1.1	16.74	34.8	-18.0		782.00	7.93	H	3.0	-1.1	3.91	34.8	-30.9	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																												
Mid Ch																																					
782.00	20.76	V	3.0	-1.1	16.74	34.8	-18.0																														
782.00	7.93	H	3.0	-1.1	3.91	34.8	-30.9																														
LTE Band 13 10MHz 16QAM	<p>UL Verification Services, Inc. High Frequency Substitution Measurement</p> <p>Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 20890 Configuration: EUT / Z-Position Location: Chamber 1 Mode: LTE_16QAM Band 13 Fundamentals, 10MHz Bandwidth</p> <p>Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>Mid Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>782.00</td> <td>20.46</td> <td>V</td> <td>3.0</td> <td>-1.1</td> <td>16.44</td> <td>34.8</td> <td>-18.3</td> <td></td> </tr> <tr> <td>782.00</td> <td>6.41</td> <td>H</td> <td>3.0</td> <td>-1.1</td> <td>2.39</td> <td>34.8</td> <td>-32.4</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Mid Ch									782.00	20.46	V	3.0	-1.1	16.44	34.8	-18.3		782.00	6.41	H	3.0	-1.1	2.39	34.8	-32.4	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																													
Mid Ch																																					
782.00	20.46	V	3.0	-1.1	16.44	34.8	-18.3																														
782.00	6.41	H	3.0	-1.1	2.39	34.8	-32.4																														

LTE Band 13 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-19																																																																																																	
	Test Engineer: 20890																																																																																																	
	Configuration: EUT / Z-Position																																																																																																	
	Location: Chamber 1																																																																																																	
	Mode: LTE_QPSK Band 13 Fundamentals, 5MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>779.50</td> <td>21.60</td> <td>V</td> <td>3.0</td> <td>-1.1</td> <td>17.59</td> <td>34.8</td> <td>-17.2</td> <td></td> </tr> <tr> <td>779.50</td> <td>7.53</td> <td>H</td> <td>3.0</td> <td>-1.1</td> <td>3.52</td> <td>34.8</td> <td>-31.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>782.00</td> <td>22.96</td> <td>V</td> <td>3.0</td> <td>-1.1</td> <td>18.94</td> <td>34.8</td> <td>-15.8</td> <td></td> </tr> <tr> <td>782.00</td> <td>7.89</td> <td>H</td> <td>3.0</td> <td>-1.1</td> <td>3.87</td> <td>34.8</td> <td>-30.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>784.50</td> <td>20.93</td> <td>V</td> <td>3.0</td> <td>-1.1</td> <td>16.92</td> <td>34.8</td> <td>-17.9</td> <td></td> </tr> <tr> <td>784.50</td> <td>7.86</td> <td>H</td> <td>3.0</td> <td>-1.1</td> <td>3.84</td> <td>34.8</td> <td>-30.9</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									779.50	21.60	V	3.0	-1.1	17.59	34.8	-17.2		779.50	7.53	H	3.0	-1.1	3.52	34.8	-31.3		Mid Ch									782.00	22.96	V	3.0	-1.1	18.94	34.8	-15.8		782.00	7.89	H	3.0	-1.1	3.87	34.8	-30.9		High Ch									784.50	20.93	V	3.0	-1.1	16.92	34.8	-17.9		784.50	7.86	H	3.0	-1.1	3.84	34.8	-30.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
779.50	21.60	V	3.0	-1.1	17.59	34.8	-17.2																																																																																											
779.50	7.53	H	3.0	-1.1	3.52	34.8	-31.3																																																																																											
Mid Ch																																																																																																		
782.00	22.96	V	3.0	-1.1	18.94	34.8	-15.8																																																																																											
782.00	7.89	H	3.0	-1.1	3.87	34.8	-30.9																																																																																											
High Ch																																																																																																		
784.50	20.93	V	3.0	-1.1	16.92	34.8	-17.9																																																																																											
784.50	7.86	H	3.0	-1.1	3.84	34.8	-30.9																																																																																											
LTE Band 13 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-19																																																																																																	
	Test Engineer: 20890																																																																																																	
	Configuration: EUT / Z-Position																																																																																																	
	Location: Chamber 1																																																																																																	
	Mode: LTE_16QAM Band 13 Fundamentals, 5MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>779.50</td> <td>20.37</td> <td>V</td> <td>3.0</td> <td>-1.1</td> <td>16.36</td> <td>34.8</td> <td>-18.4</td> <td></td> </tr> <tr> <td>779.50</td> <td>6.20</td> <td>H</td> <td>3.0</td> <td>-1.1</td> <td>2.19</td> <td>34.8</td> <td>-32.6</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>782.00</td> <td>20.17</td> <td>V</td> <td>3.0</td> <td>-1.1</td> <td>16.15</td> <td>34.8</td> <td>-18.6</td> <td></td> </tr> <tr> <td>782.00</td> <td>6.37</td> <td>H</td> <td>3.0</td> <td>-1.1</td> <td>2.35</td> <td>34.8</td> <td>-32.4</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>784.50</td> <td>19.68</td> <td>V</td> <td>3.0</td> <td>-1.1</td> <td>15.67</td> <td>34.8</td> <td>-19.1</td> <td></td> </tr> <tr> <td>784.50</td> <td>6.81</td> <td>H</td> <td>3.0</td> <td>-1.1</td> <td>2.79</td> <td>34.8</td> <td>-32.0</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									779.50	20.37	V	3.0	-1.1	16.36	34.8	-18.4		779.50	6.20	H	3.0	-1.1	2.19	34.8	-32.6		Mid Ch									782.00	20.17	V	3.0	-1.1	16.15	34.8	-18.6		782.00	6.37	H	3.0	-1.1	2.35	34.8	-32.4		High Ch									784.50	19.68	V	3.0	-1.1	15.67	34.8	-19.1		784.50	6.81	H	3.0	-1.1	2.79	34.8	-32.0
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
779.50	20.37	V	3.0	-1.1	16.36	34.8	-18.4																																																																																											
779.50	6.20	H	3.0	-1.1	2.19	34.8	-32.6																																																																																											
Mid Ch																																																																																																		
782.00	20.17	V	3.0	-1.1	16.15	34.8	-18.6																																																																																											
782.00	6.37	H	3.0	-1.1	2.35	34.8	-32.4																																																																																											
High Ch																																																																																																		
784.50	19.68	V	3.0	-1.1	15.67	34.8	-19.1																																																																																											
784.50	6.81	H	3.0	-1.1	2.79	34.8	-32.0																																																																																											

LTE Band 25

LTE Band 25 20MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-20																																																																																																	
	Test Engineer: 22943																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_QPSK Band 25 Fundamentals, 20MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1860.00</td> <td>14.92</td> <td>V</td> <td>4.6</td> <td>9.6</td> <td>19.92</td> <td>33.0</td> <td>-13.1</td> <td></td> </tr> <tr> <td>1860.00</td> <td>19.05</td> <td>H</td> <td>4.6</td> <td>9.6</td> <td>24.05</td> <td>33.0</td> <td>-8.9</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>16.26</td> <td>V</td> <td>4.6</td> <td>9.3</td> <td>21.03</td> <td>33.0</td> <td>-12.0</td> <td></td> </tr> <tr> <td>1882.50</td> <td>18.78</td> <td>H</td> <td>4.6</td> <td>9.3</td> <td>23.55</td> <td>33.0</td> <td>-9.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1905.00</td> <td>16.11</td> <td>V</td> <td>4.6</td> <td>9.1</td> <td>20.63</td> <td>33.0</td> <td>-12.4</td> <td></td> </tr> <tr> <td>1905.00</td> <td>19.38</td> <td>H</td> <td>4.6</td> <td>9.1</td> <td>23.91</td> <td>33.0</td> <td>-9.1</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1860.00	14.92	V	4.6	9.6	19.92	33.0	-13.1		1860.00	19.05	H	4.6	9.6	24.05	33.0	-8.9		Mid Ch									1882.50	16.26	V	4.6	9.3	21.03	33.0	-12.0		1882.50	18.78	H	4.6	9.3	23.55	33.0	-9.5		High Ch									1905.00	16.11	V	4.6	9.1	20.63	33.0	-12.4		1905.00	19.38	H	4.6	9.1	23.91	33.0	-9.1
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1860.00	14.92	V	4.6	9.6	19.92	33.0	-13.1																																																																																											
1860.00	19.05	H	4.6	9.6	24.05	33.0	-8.9																																																																																											
Mid Ch																																																																																																		
1882.50	16.26	V	4.6	9.3	21.03	33.0	-12.0																																																																																											
1882.50	18.78	H	4.6	9.3	23.55	33.0	-9.5																																																																																											
High Ch																																																																																																		
1905.00	16.11	V	4.6	9.1	20.63	33.0	-12.4																																																																																											
1905.00	19.38	H	4.6	9.1	23.91	33.0	-9.1																																																																																											

LTE Band 25 20MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-20																																																																																																	
	Test Engineer: 22943																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_16QAM Band 25 Fundamentals, 20MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1860.00</td> <td>13.95</td> <td>V</td> <td>4.6</td> <td>9.6</td> <td>18.95</td> <td>33.0</td> <td>-14.0</td> <td></td> </tr> <tr> <td>1860.00</td> <td>17.82</td> <td>H</td> <td>4.6</td> <td>9.6</td> <td>22.82</td> <td>33.0</td> <td>-10.2</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>14.43</td> <td>V</td> <td>4.6</td> <td>9.3</td> <td>19.20</td> <td>33.0</td> <td>-13.8</td> <td></td> </tr> <tr> <td>1882.50</td> <td>17.29</td> <td>H</td> <td>4.6</td> <td>9.3</td> <td>22.06</td> <td>33.0</td> <td>-10.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1905.00</td> <td>15.18</td> <td>V</td> <td>4.6</td> <td>9.1</td> <td>19.70</td> <td>33.0</td> <td>-13.3</td> <td></td> </tr> <tr> <td>1905.00</td> <td>18.93</td> <td>H</td> <td>4.6</td> <td>9.1</td> <td>23.46</td> <td>33.0</td> <td>-9.5</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1860.00	13.95	V	4.6	9.6	18.95	33.0	-14.0		1860.00	17.82	H	4.6	9.6	22.82	33.0	-10.2		Mid Ch									1882.50	14.43	V	4.6	9.3	19.20	33.0	-13.8		1882.50	17.29	H	4.6	9.3	22.06	33.0	-10.9		High Ch									1905.00	15.18	V	4.6	9.1	19.70	33.0	-13.3		1905.00	18.93	H	4.6	9.1	23.46	33.0	-9.5
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1860.00	13.95	V	4.6	9.6	18.95	33.0	-14.0																																																																																											
1860.00	17.82	H	4.6	9.6	22.82	33.0	-10.2																																																																																											
Mid Ch																																																																																																		
1882.50	14.43	V	4.6	9.3	19.20	33.0	-13.8																																																																																											
1882.50	17.29	H	4.6	9.3	22.06	33.0	-10.9																																																																																											
High Ch																																																																																																		
1905.00	15.18	V	4.6	9.1	19.70	33.0	-13.3																																																																																											
1905.00	18.93	H	4.6	9.1	23.46	33.0	-9.5																																																																																											

LTE Band 25 15MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-20																																																																																																	
	Test Engineer: 20896																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_QPSK Band 25 Fundamentals, 15MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1857.50</td> <td>13.99</td> <td>V</td> <td>4.5</td> <td>9.6</td> <td>19.02</td> <td>33.0</td> <td>-14.0</td> <td></td> </tr> <tr> <td>1857.50</td> <td>18.73</td> <td>H</td> <td>4.5</td> <td>9.6</td> <td>23.76</td> <td>33.0</td> <td>-9.2</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>16.01</td> <td>V</td> <td>4.6</td> <td>9.3</td> <td>20.78</td> <td>33.0</td> <td>-12.2</td> <td></td> </tr> <tr> <td>1882.50</td> <td>18.43</td> <td>H</td> <td>4.6</td> <td>9.3</td> <td>23.20</td> <td>33.0</td> <td>-9.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1907.50</td> <td>16.37</td> <td>V</td> <td>4.6</td> <td>9.1</td> <td>20.86</td> <td>33.0</td> <td>-12.1</td> <td></td> </tr> <tr> <td>1907.50</td> <td>19.95</td> <td>H</td> <td>4.6</td> <td>9.1</td> <td>24.44</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1857.50	13.99	V	4.5	9.6	19.02	33.0	-14.0		1857.50	18.73	H	4.5	9.6	23.76	33.0	-9.2		Mid Ch									1882.50	16.01	V	4.6	9.3	20.78	33.0	-12.2		1882.50	18.43	H	4.6	9.3	23.20	33.0	-9.8		High Ch									1907.50	16.37	V	4.6	9.1	20.86	33.0	-12.1		1907.50	19.95	H	4.6	9.1	24.44	33.0	-8.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1857.50	13.99	V	4.5	9.6	19.02	33.0	-14.0																																																																																											
1857.50	18.73	H	4.5	9.6	23.76	33.0	-9.2																																																																																											
Mid Ch																																																																																																		
1882.50	16.01	V	4.6	9.3	20.78	33.0	-12.2																																																																																											
1882.50	18.43	H	4.6	9.3	23.20	33.0	-9.8																																																																																											
High Ch																																																																																																		
1907.50	16.37	V	4.6	9.1	20.86	33.0	-12.1																																																																																											
1907.50	19.95	H	4.6	9.1	24.44	33.0	-8.6																																																																																											
LTE Band 25 15MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-20																																																																																																	
	Test Engineer: 20896																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_16QAM Band 25 Fundamentals, 15MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1857.50</td> <td>13.99</td> <td>V</td> <td>4.5</td> <td>9.6</td> <td>19.02</td> <td>33.0</td> <td>-14.0</td> <td></td> </tr> <tr> <td>1857.50</td> <td>18.52</td> <td>H</td> <td>4.5</td> <td>9.6</td> <td>23.55</td> <td>33.0</td> <td>-9.4</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>14.96</td> <td>V</td> <td>4.6</td> <td>9.3</td> <td>19.73</td> <td>33.0</td> <td>-13.3</td> <td></td> </tr> <tr> <td>1882.50</td> <td>17.36</td> <td>H</td> <td>4.6</td> <td>9.3</td> <td>22.13</td> <td>33.0</td> <td>-10.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1907.50</td> <td>14.97</td> <td>V</td> <td>4.6</td> <td>9.1</td> <td>19.46</td> <td>33.0</td> <td>-13.5</td> <td></td> </tr> <tr> <td>1907.50</td> <td>18.42</td> <td>H</td> <td>4.6</td> <td>9.1</td> <td>22.91</td> <td>33.0</td> <td>-10.1</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1857.50	13.99	V	4.5	9.6	19.02	33.0	-14.0		1857.50	18.52	H	4.5	9.6	23.55	33.0	-9.4		Mid Ch									1882.50	14.96	V	4.6	9.3	19.73	33.0	-13.3		1882.50	17.36	H	4.6	9.3	22.13	33.0	-10.9		High Ch									1907.50	14.97	V	4.6	9.1	19.46	33.0	-13.5		1907.50	18.42	H	4.6	9.1	22.91	33.0	-10.1
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1857.50	13.99	V	4.5	9.6	19.02	33.0	-14.0																																																																																											
1857.50	18.52	H	4.5	9.6	23.55	33.0	-9.4																																																																																											
Mid Ch																																																																																																		
1882.50	14.96	V	4.6	9.3	19.73	33.0	-13.3																																																																																											
1882.50	17.36	H	4.6	9.3	22.13	33.0	-10.9																																																																																											
High Ch																																																																																																		
1907.50	14.97	V	4.6	9.1	19.46	33.0	-13.5																																																																																											
1907.50	18.42	H	4.6	9.1	22.91	33.0	-10.1																																																																																											

LTE Band 25 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-20																																																																																																	
	Test Engineer: 20896																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_QPSK Band 25 Fundamentals, 10MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1855.00</td> <td>14.82</td> <td>V</td> <td>4.5</td> <td>9.6</td> <td>19.87</td> <td>33.0</td> <td>-13.1</td> <td></td> </tr> <tr> <td>1855.00</td> <td>19.24</td> <td>H</td> <td>4.5</td> <td>9.6</td> <td>24.29</td> <td>33.0</td> <td>-8.7</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>16.03</td> <td>V</td> <td>4.6</td> <td>9.3</td> <td>20.80</td> <td>33.0</td> <td>-12.2</td> <td></td> </tr> <tr> <td>1882.50</td> <td>18.60</td> <td>H</td> <td>4.6</td> <td>9.3</td> <td>23.37</td> <td>33.0</td> <td>-9.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1910.00</td> <td>16.00</td> <td>V</td> <td>4.6</td> <td>9.1</td> <td>20.45</td> <td>33.0</td> <td>-12.5</td> <td></td> </tr> <tr> <td>1910.00</td> <td>19.91</td> <td>H</td> <td>4.6</td> <td>9.1</td> <td>24.36</td> <td>33.0</td> <td>-8.6</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1855.00	14.82	V	4.5	9.6	19.87	33.0	-13.1		1855.00	19.24	H	4.5	9.6	24.29	33.0	-8.7		Mid Ch									1882.50	16.03	V	4.6	9.3	20.80	33.0	-12.2		1882.50	18.60	H	4.6	9.3	23.37	33.0	-9.6		High Ch									1910.00	16.00	V	4.6	9.1	20.45	33.0	-12.5		1910.00	19.91	H	4.6	9.1	24.36	33.0	-8.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1855.00	14.82	V	4.5	9.6	19.87	33.0	-13.1																																																																																											
1855.00	19.24	H	4.5	9.6	24.29	33.0	-8.7																																																																																											
Mid Ch																																																																																																		
1882.50	16.03	V	4.6	9.3	20.80	33.0	-12.2																																																																																											
1882.50	18.60	H	4.6	9.3	23.37	33.0	-9.6																																																																																											
High Ch																																																																																																		
1910.00	16.00	V	4.6	9.1	20.45	33.0	-12.5																																																																																											
1910.00	19.91	H	4.6	9.1	24.36	33.0	-8.6																																																																																											
LTE Band 25 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-20																																																																																																	
	Test Engineer: 20896																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_16QAM Band 25 Fundamentals, 10MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1855.00</td> <td>12.67</td> <td>V</td> <td>4.5</td> <td>9.6</td> <td>17.72</td> <td>33.0</td> <td>-15.3</td> <td></td> </tr> <tr> <td>1855.00</td> <td>17.54</td> <td>H</td> <td>4.5</td> <td>9.6</td> <td>22.59</td> <td>33.0</td> <td>-10.4</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>14.63</td> <td>V</td> <td>4.6</td> <td>9.3</td> <td>19.40</td> <td>33.0</td> <td>-13.6</td> <td></td> </tr> <tr> <td>1882.50</td> <td>17.28</td> <td>H</td> <td>4.6</td> <td>9.3</td> <td>22.05</td> <td>33.0</td> <td>-11.0</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1910.00</td> <td>15.15</td> <td>V</td> <td>4.6</td> <td>9.1</td> <td>19.60</td> <td>33.0</td> <td>-13.4</td> <td></td> </tr> <tr> <td>1910.00</td> <td>18.39</td> <td>H</td> <td>4.6</td> <td>9.1</td> <td>22.84</td> <td>33.0</td> <td>-10.2</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1855.00	12.67	V	4.5	9.6	17.72	33.0	-15.3		1855.00	17.54	H	4.5	9.6	22.59	33.0	-10.4		Mid Ch									1882.50	14.63	V	4.6	9.3	19.40	33.0	-13.6		1882.50	17.28	H	4.6	9.3	22.05	33.0	-11.0		High Ch									1910.00	15.15	V	4.6	9.1	19.60	33.0	-13.4		1910.00	18.39	H	4.6	9.1	22.84	33.0	-10.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1855.00	12.67	V	4.5	9.6	17.72	33.0	-15.3																																																																																											
1855.00	17.54	H	4.5	9.6	22.59	33.0	-10.4																																																																																											
Mid Ch																																																																																																		
1882.50	14.63	V	4.6	9.3	19.40	33.0	-13.6																																																																																											
1882.50	17.28	H	4.6	9.3	22.05	33.0	-11.0																																																																																											
High Ch																																																																																																		
1910.00	15.15	V	4.6	9.1	19.60	33.0	-13.4																																																																																											
1910.00	18.39	H	4.6	9.1	22.84	33.0	-10.2																																																																																											

LTE Band 25 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-21																																																																																																	
	Test Engineer: 20882																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_QPSK Band 25 Fundamentals, 3MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1851.50</td> <td>13.67</td> <td>V</td> <td>4.5</td> <td>9.6</td> <td>18.77</td> <td>33.0</td> <td>-14.2</td> <td></td> </tr> <tr> <td>1851.50</td> <td>18.71</td> <td>H</td> <td>4.5</td> <td>9.6</td> <td>23.81</td> <td>33.0</td> <td>-9.2</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>16.43</td> <td>V</td> <td>4.6</td> <td>9.3</td> <td>21.20</td> <td>33.0</td> <td>-11.8</td> <td></td> </tr> <tr> <td>1882.50</td> <td>18.63</td> <td>H</td> <td>4.6</td> <td>9.3</td> <td>23.40</td> <td>33.0</td> <td>-9.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1913.50</td> <td>15.46</td> <td>V</td> <td>4.6</td> <td>9.0</td> <td>19.86</td> <td>33.0</td> <td>-13.1</td> <td></td> </tr> <tr> <td>1913.50</td> <td>18.99</td> <td>H</td> <td>4.6</td> <td>9.0</td> <td>23.39</td> <td>33.0</td> <td>-9.6</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1851.50	13.67	V	4.5	9.6	18.77	33.0	-14.2		1851.50	18.71	H	4.5	9.6	23.81	33.0	-9.2		Mid Ch									1882.50	16.43	V	4.6	9.3	21.20	33.0	-11.8		1882.50	18.63	H	4.6	9.3	23.40	33.0	-9.6		High Ch									1913.50	15.46	V	4.6	9.0	19.86	33.0	-13.1		1913.50	18.99	H	4.6	9.0	23.39	33.0	-9.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1851.50	13.67	V	4.5	9.6	18.77	33.0	-14.2																																																																																											
1851.50	18.71	H	4.5	9.6	23.81	33.0	-9.2																																																																																											
Mid Ch																																																																																																		
1882.50	16.43	V	4.6	9.3	21.20	33.0	-11.8																																																																																											
1882.50	18.63	H	4.6	9.3	23.40	33.0	-9.6																																																																																											
High Ch																																																																																																		
1913.50	15.46	V	4.6	9.0	19.86	33.0	-13.1																																																																																											
1913.50	18.99	H	4.6	9.0	23.39	33.0	-9.6																																																																																											
LTE Band 25 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-21																																																																																																	
	Test Engineer: 20882																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_16QAM Band 25 Fundamentals, 5MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1852.50</td> <td>12.60</td> <td>V</td> <td>4.5</td> <td>9.6</td> <td>17.68</td> <td>33.0</td> <td>-15.3</td> <td></td> </tr> <tr> <td>1852.50</td> <td>17.87</td> <td>H</td> <td>4.5</td> <td>9.6</td> <td>22.95</td> <td>33.0</td> <td>-10.0</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>14.64</td> <td>V</td> <td>4.6</td> <td>9.3</td> <td>19.41</td> <td>33.0</td> <td>-13.6</td> <td></td> </tr> <tr> <td>1882.50</td> <td>17.56</td> <td>H</td> <td>4.6</td> <td>9.3</td> <td>22.33</td> <td>33.0</td> <td>-10.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1912.50</td> <td>14.40</td> <td>V</td> <td>4.6</td> <td>9.0</td> <td>18.82</td> <td>33.0</td> <td>-14.2</td> <td></td> </tr> <tr> <td>1912.50</td> <td>17.82</td> <td>H</td> <td>4.6</td> <td>9.0</td> <td>22.25</td> <td>33.0</td> <td>-10.8</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1852.50	12.60	V	4.5	9.6	17.68	33.0	-15.3		1852.50	17.87	H	4.5	9.6	22.95	33.0	-10.0		Mid Ch									1882.50	14.64	V	4.6	9.3	19.41	33.0	-13.6		1882.50	17.56	H	4.6	9.3	22.33	33.0	-10.7		High Ch									1912.50	14.40	V	4.6	9.0	18.82	33.0	-14.2		1912.50	17.82	H	4.6	9.0	22.25	33.0	-10.8
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1852.50	12.60	V	4.5	9.6	17.68	33.0	-15.3																																																																																											
1852.50	17.87	H	4.5	9.6	22.95	33.0	-10.0																																																																																											
Mid Ch																																																																																																		
1882.50	14.64	V	4.6	9.3	19.41	33.0	-13.6																																																																																											
1882.50	17.56	H	4.6	9.3	22.33	33.0	-10.7																																																																																											
High Ch																																																																																																		
1912.50	14.40	V	4.6	9.0	18.82	33.0	-14.2																																																																																											
1912.50	17.82	H	4.6	9.0	22.25	33.0	-10.8																																																																																											

LTE Band 25 3MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-21																																																																																																	
	Test Engineer: 20882																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_QPSK Band 25 Fundamentals, 3MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1851.50</td> <td>14.08</td> <td>V</td> <td>4.5</td> <td>9.6</td> <td>19.18</td> <td>33.0</td> <td>-13.8</td> <td></td> </tr> <tr> <td>1851.50</td> <td>17.41</td> <td>H</td> <td>4.5</td> <td>9.6</td> <td>22.51</td> <td>33.0</td> <td>-10.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>16.72</td> <td>V</td> <td>4.6</td> <td>9.3</td> <td>21.49</td> <td>33.0</td> <td>-11.5</td> <td></td> </tr> <tr> <td>1882.50</td> <td>18.36</td> <td>H</td> <td>4.6</td> <td>9.3</td> <td>23.13</td> <td>33.0</td> <td>-9.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1913.50</td> <td>15.83</td> <td>V</td> <td>4.6</td> <td>9.0</td> <td>20.23</td> <td>33.0</td> <td>-12.8</td> <td></td> </tr> <tr> <td>1913.50</td> <td>19.25</td> <td>H</td> <td>4.6</td> <td>9.0</td> <td>23.65</td> <td>33.0</td> <td>-9.3</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1851.50	14.08	V	4.5	9.6	19.18	33.0	-13.8		1851.50	17.41	H	4.5	9.6	22.51	33.0	-10.5		Mid Ch									1882.50	16.72	V	4.6	9.3	21.49	33.0	-11.5		1882.50	18.36	H	4.6	9.3	23.13	33.0	-9.9		High Ch									1913.50	15.83	V	4.6	9.0	20.23	33.0	-12.8		1913.50	19.25	H	4.6	9.0	23.65	33.0	-9.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1851.50	14.08	V	4.5	9.6	19.18	33.0	-13.8																																																																																											
1851.50	17.41	H	4.5	9.6	22.51	33.0	-10.5																																																																																											
Mid Ch																																																																																																		
1882.50	16.72	V	4.6	9.3	21.49	33.0	-11.5																																																																																											
1882.50	18.36	H	4.6	9.3	23.13	33.0	-9.9																																																																																											
High Ch																																																																																																		
1913.50	15.83	V	4.6	9.0	20.23	33.0	-12.8																																																																																											
1913.50	19.25	H	4.6	9.0	23.65	33.0	-9.3																																																																																											
LTE Band 25 3MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-21																																																																																																	
	Test Engineer: 20882																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_16QAM Band 25 Fundamentals, 3MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1851.50</td> <td>12.65</td> <td>V</td> <td>4.5</td> <td>9.6</td> <td>17.75</td> <td>33.0</td> <td>-15.3</td> <td></td> </tr> <tr> <td>1851.50</td> <td>16.74</td> <td>H</td> <td>4.5</td> <td>9.6</td> <td>21.84</td> <td>33.0</td> <td>-11.2</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>14.71</td> <td>V</td> <td>4.6</td> <td>9.3</td> <td>19.48</td> <td>33.0</td> <td>-13.5</td> <td></td> </tr> <tr> <td>1882.50</td> <td>17.20</td> <td>H</td> <td>4.6</td> <td>9.3</td> <td>21.97</td> <td>33.0</td> <td>-11.0</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1913.50</td> <td>13.77</td> <td>V</td> <td>4.6</td> <td>9.0</td> <td>18.17</td> <td>33.0</td> <td>-14.8</td> <td></td> </tr> <tr> <td>1913.50</td> <td>17.92</td> <td>H</td> <td>4.6</td> <td>9.0</td> <td>22.32</td> <td>33.0</td> <td>-10.7</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1851.50	12.65	V	4.5	9.6	17.75	33.0	-15.3		1851.50	16.74	H	4.5	9.6	21.84	33.0	-11.2		Mid Ch									1882.50	14.71	V	4.6	9.3	19.48	33.0	-13.5		1882.50	17.20	H	4.6	9.3	21.97	33.0	-11.0		High Ch									1913.50	13.77	V	4.6	9.0	18.17	33.0	-14.8		1913.50	17.92	H	4.6	9.0	22.32	33.0	-10.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1851.50	12.65	V	4.5	9.6	17.75	33.0	-15.3																																																																																											
1851.50	16.74	H	4.5	9.6	21.84	33.0	-11.2																																																																																											
Mid Ch																																																																																																		
1882.50	14.71	V	4.6	9.3	19.48	33.0	-13.5																																																																																											
1882.50	17.20	H	4.6	9.3	21.97	33.0	-11.0																																																																																											
High Ch																																																																																																		
1913.50	13.77	V	4.6	9.0	18.17	33.0	-14.8																																																																																											
1913.50	17.92	H	4.6	9.0	22.32	33.0	-10.7																																																																																											

LTE Band 25 1.4MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-21																																																																																																	
	Test Engineer: 20882																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_QPSK Band 25 Fundamentals, 1.4MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1850.70</td> <td>13.66</td> <td>V</td> <td>4.5</td> <td>9.6</td> <td>18.76</td> <td>33.0</td> <td>-14.2</td> <td></td> </tr> <tr> <td>1850.70</td> <td>18.72</td> <td>H</td> <td>4.5</td> <td>9.6</td> <td>23.83</td> <td>33.0</td> <td>-9.2</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>16.36</td> <td>V</td> <td>4.6</td> <td>9.3</td> <td>21.13</td> <td>33.0</td> <td>-11.9</td> <td></td> </tr> <tr> <td>1882.50</td> <td>18.63</td> <td>H</td> <td>4.6</td> <td>9.3</td> <td>23.40</td> <td>33.0</td> <td>-9.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1914.30</td> <td>15.54</td> <td>V</td> <td>4.6</td> <td>9.0</td> <td>19.94</td> <td>33.0</td> <td>-13.1</td> <td></td> </tr> <tr> <td>1914.30</td> <td>19.04</td> <td>H</td> <td>4.6</td> <td>9.0</td> <td>23.44</td> <td>33.0</td> <td>-9.6</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.70	13.66	V	4.5	9.6	18.76	33.0	-14.2		1850.70	18.72	H	4.5	9.6	23.83	33.0	-9.2		Mid Ch									1882.50	16.36	V	4.6	9.3	21.13	33.0	-11.9		1882.50	18.63	H	4.6	9.3	23.40	33.0	-9.6		High Ch									1914.30	15.54	V	4.6	9.0	19.94	33.0	-13.1		1914.30	19.04	H	4.6	9.0	23.44	33.0	-9.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1850.70	13.66	V	4.5	9.6	18.76	33.0	-14.2																																																																																											
1850.70	18.72	H	4.5	9.6	23.83	33.0	-9.2																																																																																											
Mid Ch																																																																																																		
1882.50	16.36	V	4.6	9.3	21.13	33.0	-11.9																																																																																											
1882.50	18.63	H	4.6	9.3	23.40	33.0	-9.6																																																																																											
High Ch																																																																																																		
1914.30	15.54	V	4.6	9.0	19.94	33.0	-13.1																																																																																											
1914.30	19.04	H	4.6	9.0	23.44	33.0	-9.6																																																																																											
LTE Band 25 1.4MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-21																																																																																																	
	Test Engineer: 20882																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_16QAM Band 25 Fundamentals, 1.4MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1850.70</td> <td>12.11</td> <td>V</td> <td>4.5</td> <td>9.6</td> <td>17.21</td> <td>33.0</td> <td>-15.8</td> <td></td> </tr> <tr> <td>1850.70</td> <td>17.44</td> <td>H</td> <td>4.5</td> <td>9.6</td> <td>22.55</td> <td>33.0</td> <td>-10.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1882.50</td> <td>14.75</td> <td>V</td> <td>4.6</td> <td>9.3</td> <td>19.52</td> <td>33.0</td> <td>-13.5</td> <td></td> </tr> <tr> <td>1882.50</td> <td>17.44</td> <td>H</td> <td>4.6</td> <td>9.3</td> <td>22.21</td> <td>33.0</td> <td>-10.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1914.30</td> <td>14.21</td> <td>V</td> <td>4.6</td> <td>9.0</td> <td>18.61</td> <td>33.0</td> <td>-14.4</td> <td></td> </tr> <tr> <td>1914.30</td> <td>17.97</td> <td>H</td> <td>4.6</td> <td>9.0</td> <td>22.37</td> <td>33.0</td> <td>-10.6</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.70	12.11	V	4.5	9.6	17.21	33.0	-15.8		1850.70	17.44	H	4.5	9.6	22.55	33.0	-10.5		Mid Ch									1882.50	14.75	V	4.6	9.3	19.52	33.0	-13.5		1882.50	17.44	H	4.6	9.3	22.21	33.0	-10.8		High Ch									1914.30	14.21	V	4.6	9.0	18.61	33.0	-14.4		1914.30	17.97	H	4.6	9.0	22.37	33.0	-10.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1850.70	12.11	V	4.5	9.6	17.21	33.0	-15.8																																																																																											
1850.70	17.44	H	4.5	9.6	22.55	33.0	-10.5																																																																																											
Mid Ch																																																																																																		
1882.50	14.75	V	4.6	9.3	19.52	33.0	-13.5																																																																																											
1882.50	17.44	H	4.6	9.3	22.21	33.0	-10.8																																																																																											
High Ch																																																																																																		
1914.30	14.21	V	4.6	9.0	18.61	33.0	-14.4																																																																																											
1914.30	17.97	H	4.6	9.0	22.37	33.0	-10.6																																																																																											

LTE Band 26 (Part 90)

LTE Band 26 15MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_QPSK Band 26 Fundamentals, 15MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	821.50	23.88	V	3.0	-1.0	19.87	50.0	-30.1	Part 90
	821.50	13.00	H	3.0	-1.0	8.99	50.0	-41.0	Part 90
LTE Band 26 15MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_16QAM Band 26 Fundamentals, 15MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	821.50	22.80	V	3.0	-1.0	18.79	50.0	-31.2	Part 90
	821.50	11.92	H	3.0	-1.0	7.91	50.0	-42.1	Part 90

LTE Band 26 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																											
	<p> Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_QPSK Band 26 Fundamentals, 10MHz Bandwidth </p> <p> Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable </p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>Low Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>819.00</td> <td>23.80</td> <td>V</td> <td>3.0</td> <td>-1.0</td> <td>19.80</td> <td>50.0</td> <td>-30.2</td> <td>Part 90</td> </tr> <tr> <td>819.00</td> <td>13.85</td> <td>H</td> <td>3.0</td> <td>-1.0</td> <td>9.85</td> <td>50.0</td> <td>-40.2</td> <td>Part 90</td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									819.00	23.80	V	3.0	-1.0	19.80	50.0	-30.2	Part 90	819.00	13.85	H	3.0	-1.0	9.85	50.0	-40.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																				
Low Ch																																												
819.00	23.80	V	3.0	-1.0	19.80	50.0	-30.2	Part 90																																				
819.00	13.85	H	3.0	-1.0	9.85	50.0	-40.2	Part 90																																				
LTE Band 26 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																											
	<p> Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_16QAM Band 26 Fundamentals, 10MHz Bandwidth </p> <p> Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable </p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>Low Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>819.00</td> <td>21.86</td> <td>V</td> <td>3.0</td> <td>-1.0</td> <td>17.86</td> <td>50.0</td> <td>-32.1</td> <td>Part 90</td> </tr> <tr> <td>819.00</td> <td>11.98</td> <td>H</td> <td>3.0</td> <td>-1.0</td> <td>7.98</td> <td>50.0</td> <td>-42.0</td> <td>Part 90</td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									819.00	21.86	V	3.0	-1.0	17.86	50.0	-32.1	Part 90	819.00	11.98	H	3.0	-1.0	7.98	50.0	-42.0
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																				
Low Ch																																												
819.00	21.86	V	3.0	-1.0	17.86	50.0	-32.1	Part 90																																				
819.00	11.98	H	3.0	-1.0	7.98	50.0	-42.0	Part 90																																				

LTE Band 26 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																						
	Company: Samsung																																																																						
	Project #: 4789651209																																																																						
	Date: 2020-10-19																																																																						
	Test Engineer: 20882																																																																						
	Configuration: EUT, Z-Position																																																																						
	Location: Chamber 1																																																																						
	Mode: LTE_QPSK Band 26 Fundamentals, 5MHz Bandwidth																																																																						
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																						
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>816.50</td> <td>23.09</td> <td>V</td> <td>3.0</td> <td>-1.0</td> <td>19.08</td> <td>50.0</td> <td>-30.9</td> <td>Part 90</td> </tr> <tr> <td>816.50</td> <td>13.37</td> <td>H</td> <td>3.0</td> <td>-1.0</td> <td>9.36</td> <td>50.0</td> <td>-40.6</td> <td>Part 90</td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>821.50</td> <td>22.63</td> <td>V</td> <td>3.0</td> <td>-1.0</td> <td>18.62</td> <td>50.0</td> <td>-31.4</td> <td>Part 90</td> </tr> <tr> <td>821.50</td> <td>12.06</td> <td>H</td> <td>3.0</td> <td>-1.0</td> <td>8.05</td> <td>50.0</td> <td>-41.9</td> <td>Part 90</td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									816.50	23.09	V	3.0	-1.0	19.08	50.0	-30.9	Part 90	816.50	13.37	H	3.0	-1.0	9.36	50.0	-40.6	Part 90	Mid Ch									821.50	22.63	V	3.0	-1.0	18.62	50.0	-31.4	Part 90	821.50	12.06	H	3.0	-1.0	8.05	50.0	-41.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																															
Low Ch																																																																							
816.50	23.09	V	3.0	-1.0	19.08	50.0	-30.9	Part 90																																																															
816.50	13.37	H	3.0	-1.0	9.36	50.0	-40.6	Part 90																																																															
Mid Ch																																																																							
821.50	22.63	V	3.0	-1.0	18.62	50.0	-31.4	Part 90																																																															
821.50	12.06	H	3.0	-1.0	8.05	50.0	-41.9	Part 90																																																															
LTE Band 26 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																						
	Company: Samsung																																																																						
	Project #: 4789651209																																																																						
	Date: 2020-10-19																																																																						
	Test Engineer: 20882																																																																						
	Configuration: EUT, Z-Position																																																																						
	Location: Chamber 1																																																																						
	Mode: LTE_16QAM Band 26 Fundamentals, 5MHz Bandwidth																																																																						
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																						
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>816.50</td> <td>21.72</td> <td>V</td> <td>3.0</td> <td>-1.0</td> <td>17.71</td> <td>50.0</td> <td>-32.3</td> <td>Part 90</td> </tr> <tr> <td>816.50</td> <td>11.95</td> <td>H</td> <td>3.0</td> <td>-1.0</td> <td>7.94</td> <td>50.0</td> <td>-42.1</td> <td>Part 90</td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>821.50</td> <td>21.89</td> <td>V</td> <td>3.0</td> <td>-1.0</td> <td>17.88</td> <td>50.0</td> <td>-32.1</td> <td>Part 90</td> </tr> <tr> <td>821.50</td> <td>11.26</td> <td>H</td> <td>3.0</td> <td>-1.0</td> <td>7.25</td> <td>50.0</td> <td>-42.7</td> <td>Part 90</td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									816.50	21.72	V	3.0	-1.0	17.71	50.0	-32.3	Part 90	816.50	11.95	H	3.0	-1.0	7.94	50.0	-42.1	Part 90	Mid Ch									821.50	21.89	V	3.0	-1.0	17.88	50.0	-32.1	Part 90	821.50	11.26	H	3.0	-1.0	7.25	50.0	-42.7
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																															
Low Ch																																																																							
816.50	21.72	V	3.0	-1.0	17.71	50.0	-32.3	Part 90																																																															
816.50	11.95	H	3.0	-1.0	7.94	50.0	-42.1	Part 90																																																															
Mid Ch																																																																							
821.50	21.89	V	3.0	-1.0	17.88	50.0	-32.1	Part 90																																																															
821.50	11.26	H	3.0	-1.0	7.25	50.0	-42.7	Part 90																																																															

LTE Band 26 3MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_QPSK Band 26 Fundamentals, 3MHz Bandwidth Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	815.50	22.71	V	3.0	-1.0	18.69	50.0	-31.3	Part 90
	815.50	13.23	H	3.0	-1.0	9.22	50.0	-40.8	Part 90
	Mid Ch								
	822.50	22.86	V	3.0	-1.0	18.86	50.0	-31.1	Part 90
	822.50	12.20	H	3.0	-1.0	8.19	50.0	-41.8	Part 90
LTE Band 26 3MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_16QAM Band 26 Fundamentals, 3MHz Bandwidth Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Delta	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	815.50	21.52	V	3.0	-1.0	17.50	50.0	-32.5	Part 90
	815.50	11.77	H	3.0	-1.0	7.76	50.0	-42.2	Part 90
	Mid Ch								
	822.50	21.90	V	3.0	-1.0	17.90	50.0	-32.1	Part 90
	822.50	11.30	H	3.0	-1.0	7.29	50.0	-42.7	Part 90

LTE Band 26 1.4MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement							
Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_QPSK Band 26 Fundamentals, 1.4MHz Bandwidth								
Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
814.70	22.59	V	3.0	-1.0	18.57	50.0	-31.4	Part 90
814.70	12.87	H	3.0	-1.0	8.85	50.0	-41.2	Part 90
Mid Ch								
823.30	23.26	V	3.0	-1.0	19.26	50.0	-30.7	Part 90
823.30	12.22	H	3.0	-1.0	8.22	50.0	-41.8	Part 90
LTE Band 26 1.4MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement							
Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_16QAM Band 26 Fundamentals, 1.4MHz Bandwidth								
Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
814.70	21.34	V	3.0	-1.0	17.32	50.0	-32.7	Part 90
814.70	11.89	H	3.0	-1.0	7.87	50.0	-42.1	Part 90
Mid Ch								
823.30	22.25	V	3.0	-1.0	18.25	50.0	-31.7	Part 90
823.30	11.25	H	3.0	-1.0	7.25	50.0	-42.7	Part 90

LTE Band 26 (Part 22)

LTE Band 26 15MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																														
	<p> Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_QPSK Band 26 Fundamentals, 15MHz Bandwidth </p> <p> Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable </p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>26.15</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>22.17</td> <td>38.5</td> <td>-16.3</td> <td></td> </tr> <tr> <td>831.50</td> <td>14.23</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>10.25</td> <td>38.5</td> <td>-28.2</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>841.50</td> <td>26.26</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>22.30</td> <td>38.5</td> <td>-16.2</td> <td></td> </tr> <tr> <td>841.50</td> <td>15.14</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>11.18</td> <td>38.5</td> <td>-27.3</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Mid Ch									831.50	26.15	V	3.1	-0.9	22.17	38.5	-16.3		831.50	14.23	H	3.1	-0.9	10.25	38.5	-28.2		High Ch									841.50	26.26	V	3.1	-0.9	22.30	38.5	-16.2		841.50	15.14	H	3.1	-0.9	11.18	38.5	-27.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																							
Mid Ch																																																															
831.50	26.15	V	3.1	-0.9	22.17	38.5	-16.3																																																								
831.50	14.23	H	3.1	-0.9	10.25	38.5	-28.2																																																								
High Ch																																																															
841.50	26.26	V	3.1	-0.9	22.30	38.5	-16.2																																																								
841.50	15.14	H	3.1	-0.9	11.18	38.5	-27.3																																																								
LTE Band 26 15MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																														
	<p> Company: Samsung Project #: 4789651209 Date: 2020-10-19 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_16QAM Band 26 Fundamentals, 15MHz Bandwidth </p> <p> Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable </p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>25.16</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>21.18</td> <td>38.5</td> <td>-17.3</td> <td></td> </tr> <tr> <td>831.50</td> <td>13.09</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>9.11</td> <td>38.5</td> <td>-29.4</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>841.50</td> <td>25.20</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>21.24</td> <td>38.5</td> <td>-17.3</td> <td></td> </tr> <tr> <td>841.50</td> <td>13.96</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>10.00</td> <td>38.5</td> <td>-28.5</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Mid Ch									831.50	25.16	V	3.1	-0.9	21.18	38.5	-17.3		831.50	13.09	H	3.1	-0.9	9.11	38.5	-29.4		High Ch									841.50	25.20	V	3.1	-0.9	21.24	38.5	-17.3		841.50	13.96	H	3.1	-0.9	10.00	38.5	-28.5
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																							
Mid Ch																																																															
831.50	25.16	V	3.1	-0.9	21.18	38.5	-17.3																																																								
831.50	13.09	H	3.1	-0.9	9.11	38.5	-29.4																																																								
High Ch																																																															
841.50	25.20	V	3.1	-0.9	21.24	38.5	-17.3																																																								
841.50	13.96	H	3.1	-0.9	10.00	38.5	-28.5																																																								

LTE Band 26 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-16																																																																																																	
	Test Engineer: 20882																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 1																																																																																																	
	Mode: LTE_QPSK Band 26 Fundamentals, 10MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>829.00</td> <td>24.09</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>20.11</td> <td>38.5</td> <td>-18.4</td> <td></td> </tr> <tr> <td>829.00</td> <td>12.55</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>8.56</td> <td>38.5</td> <td>-29.9</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>26.49</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>22.51</td> <td>38.5</td> <td>-16.0</td> <td></td> </tr> <tr> <td>831.50</td> <td>14.54</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>10.56</td> <td>38.5</td> <td>-27.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>844.00</td> <td>26.60</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>22.65</td> <td>38.5</td> <td>-15.8</td> <td></td> </tr> <tr> <td>844.00</td> <td>15.27</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>11.32</td> <td>38.5</td> <td>-27.2</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									829.00	24.09	V	3.1	-0.9	20.11	38.5	-18.4		829.00	12.55	H	3.1	-0.9	8.56	38.5	-29.9		Mid Ch									831.50	26.49	V	3.1	-0.9	22.51	38.5	-16.0		831.50	14.54	H	3.1	-0.9	10.56	38.5	-27.9		High Ch									844.00	26.60	V	3.1	-0.9	22.65	38.5	-15.8		844.00	15.27	H	3.1	-0.9	11.32	38.5	-27.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
829.00	24.09	V	3.1	-0.9	20.11	38.5	-18.4																																																																																											
829.00	12.55	H	3.1	-0.9	8.56	38.5	-29.9																																																																																											
Mid Ch																																																																																																		
831.50	26.49	V	3.1	-0.9	22.51	38.5	-16.0																																																																																											
831.50	14.54	H	3.1	-0.9	10.56	38.5	-27.9																																																																																											
High Ch																																																																																																		
844.00	26.60	V	3.1	-0.9	22.65	38.5	-15.8																																																																																											
844.00	15.27	H	3.1	-0.9	11.32	38.5	-27.2																																																																																											
LTE Band 26 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-16																																																																																																	
	Test Engineer: 20882																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 1																																																																																																	
	Mode: LTE_16QAM Band 26 Fundamentals, 10MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>829.00</td> <td>23.29</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>19.31</td> <td>38.5</td> <td>-19.2</td> <td></td> </tr> <tr> <td>829.00</td> <td>11.67</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>7.68</td> <td>38.5</td> <td>-30.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>25.46</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>21.48</td> <td>38.5</td> <td>-17.0</td> <td></td> </tr> <tr> <td>831.50</td> <td>13.42</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>9.44</td> <td>38.5</td> <td>-29.1</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>844.00</td> <td>25.60</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>21.65</td> <td>38.5</td> <td>-16.8</td> <td></td> </tr> <tr> <td>844.00</td> <td>14.46</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>10.51</td> <td>38.5</td> <td>-28.0</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									829.00	23.29	V	3.1	-0.9	19.31	38.5	-19.2		829.00	11.67	H	3.1	-0.9	7.68	38.5	-30.8		Mid Ch									831.50	25.46	V	3.1	-0.9	21.48	38.5	-17.0		831.50	13.42	H	3.1	-0.9	9.44	38.5	-29.1		High Ch									844.00	25.60	V	3.1	-0.9	21.65	38.5	-16.8		844.00	14.46	H	3.1	-0.9	10.51	38.5	-28.0
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
829.00	23.29	V	3.1	-0.9	19.31	38.5	-19.2																																																																																											
829.00	11.67	H	3.1	-0.9	7.68	38.5	-30.8																																																																																											
Mid Ch																																																																																																		
831.50	25.46	V	3.1	-0.9	21.48	38.5	-17.0																																																																																											
831.50	13.42	H	3.1	-0.9	9.44	38.5	-29.1																																																																																											
High Ch																																																																																																		
844.00	25.60	V	3.1	-0.9	21.65	38.5	-16.8																																																																																											
844.00	14.46	H	3.1	-0.9	10.51	38.5	-28.0																																																																																											

LTE Band 26 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-16																																																																																																	
	Test Engineer: 20882																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 1																																																																																																	
	Mode: LTE_QPSK Band 26 Fundamentals, 5MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>826.50</td> <td>24.06</td> <td>V</td> <td>3.0</td> <td>-0.9</td> <td>20.07</td> <td>38.5</td> <td>-18.4</td> <td></td> </tr> <tr> <td>826.50</td> <td>12.98</td> <td>H</td> <td>3.0</td> <td>-0.9</td> <td>8.98</td> <td>38.5</td> <td>-29.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>25.93</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>21.95</td> <td>38.5</td> <td>-16.5</td> <td></td> </tr> <tr> <td>831.50</td> <td>14.60</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>10.62</td> <td>38.5</td> <td>-27.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>846.50</td> <td>25.33</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>21.39</td> <td>38.5</td> <td>-17.1</td> <td></td> </tr> <tr> <td>846.50</td> <td>15.29</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>11.34</td> <td>38.5</td> <td>-27.2</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									826.50	24.06	V	3.0	-0.9	20.07	38.5	-18.4		826.50	12.98	H	3.0	-0.9	8.98	38.5	-29.5		Mid Ch									831.50	25.93	V	3.1	-0.9	21.95	38.5	-16.5		831.50	14.60	H	3.1	-0.9	10.62	38.5	-27.9		High Ch									846.50	25.33	V	3.1	-0.9	21.39	38.5	-17.1		846.50	15.29	H	3.1	-0.9	11.34	38.5	-27.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
826.50	24.06	V	3.0	-0.9	20.07	38.5	-18.4																																																																																											
826.50	12.98	H	3.0	-0.9	8.98	38.5	-29.5																																																																																											
Mid Ch																																																																																																		
831.50	25.93	V	3.1	-0.9	21.95	38.5	-16.5																																																																																											
831.50	14.60	H	3.1	-0.9	10.62	38.5	-27.9																																																																																											
High Ch																																																																																																		
846.50	25.33	V	3.1	-0.9	21.39	38.5	-17.1																																																																																											
846.50	15.29	H	3.1	-0.9	11.34	38.5	-27.2																																																																																											
LTE Band 26 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-16																																																																																																	
	Test Engineer: 20882																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 1																																																																																																	
	Mode: LTE_16QAM Band 26 Fundamentals, 5MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>826.50</td> <td>22.90</td> <td>V</td> <td>3.0</td> <td>-0.9</td> <td>18.91</td> <td>38.5</td> <td>-19.6</td> <td></td> </tr> <tr> <td>826.50</td> <td>11.43</td> <td>H</td> <td>3.0</td> <td>-0.9</td> <td>7.43</td> <td>38.5</td> <td>-31.1</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>24.64</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>20.66</td> <td>38.5</td> <td>-17.8</td> <td></td> </tr> <tr> <td>831.50</td> <td>13.24</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>9.26</td> <td>38.5</td> <td>-29.2</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>846.50</td> <td>23.94</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>20.00</td> <td>38.5</td> <td>-18.5</td> <td></td> </tr> <tr> <td>846.50</td> <td>14.53</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>10.58</td> <td>38.5</td> <td>-27.9</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									826.50	22.90	V	3.0	-0.9	18.91	38.5	-19.6		826.50	11.43	H	3.0	-0.9	7.43	38.5	-31.1		Mid Ch									831.50	24.64	V	3.1	-0.9	20.66	38.5	-17.8		831.50	13.24	H	3.1	-0.9	9.26	38.5	-29.2		High Ch									846.50	23.94	V	3.1	-0.9	20.00	38.5	-18.5		846.50	14.53	H	3.1	-0.9	10.58	38.5	-27.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
826.50	22.90	V	3.0	-0.9	18.91	38.5	-19.6																																																																																											
826.50	11.43	H	3.0	-0.9	7.43	38.5	-31.1																																																																																											
Mid Ch																																																																																																		
831.50	24.64	V	3.1	-0.9	20.66	38.5	-17.8																																																																																											
831.50	13.24	H	3.1	-0.9	9.26	38.5	-29.2																																																																																											
High Ch																																																																																																		
846.50	23.94	V	3.1	-0.9	20.00	38.5	-18.5																																																																																											
846.50	14.53	H	3.1	-0.9	10.58	38.5	-27.9																																																																																											

LTE Band 26 3MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-16																																																																																																	
	Test Engineer: 20882																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 1																																																																																																	
	Mode: LTE_QPSK Band 26 Fundamentals, 3MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>825.50</td> <td>23.61</td> <td>V</td> <td>3.0</td> <td>-0.9</td> <td>19.62</td> <td>38.5</td> <td>-18.9</td> <td></td> </tr> <tr> <td>825.50</td> <td>12.41</td> <td>H</td> <td>3.0</td> <td>-0.9</td> <td>8.42</td> <td>38.5</td> <td>-30.1</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>25.51</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>21.53</td> <td>38.5</td> <td>-17.0</td> <td></td> </tr> <tr> <td>831.50</td> <td>14.27</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>10.29</td> <td>38.5</td> <td>-28.2</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>847.50</td> <td>25.23</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>21.29</td> <td>38.5</td> <td>-17.2</td> <td></td> </tr> <tr> <td>847.50</td> <td>15.44</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>11.50</td> <td>38.5</td> <td>-27.0</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									825.50	23.61	V	3.0	-0.9	19.62	38.5	-18.9		825.50	12.41	H	3.0	-0.9	8.42	38.5	-30.1		Mid Ch									831.50	25.51	V	3.1	-0.9	21.53	38.5	-17.0		831.50	14.27	H	3.1	-0.9	10.29	38.5	-28.2		High Ch									847.50	25.23	V	3.1	-0.9	21.29	38.5	-17.2		847.50	15.44	H	3.1	-0.9	11.50	38.5	-27.0
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
825.50	23.61	V	3.0	-0.9	19.62	38.5	-18.9																																																																																											
825.50	12.41	H	3.0	-0.9	8.42	38.5	-30.1																																																																																											
Mid Ch																																																																																																		
831.50	25.51	V	3.1	-0.9	21.53	38.5	-17.0																																																																																											
831.50	14.27	H	3.1	-0.9	10.29	38.5	-28.2																																																																																											
High Ch																																																																																																		
847.50	25.23	V	3.1	-0.9	21.29	38.5	-17.2																																																																																											
847.50	15.44	H	3.1	-0.9	11.50	38.5	-27.0																																																																																											
LTE Band 26 3MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-10-16																																																																																																	
	Test Engineer: 20882																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 1																																																																																																	
	Mode: LTE_16QAM Band 26 Fundamentals, 3MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>825.50</td> <td>22.84</td> <td>V</td> <td>3.0</td> <td>-0.9</td> <td>18.85</td> <td>38.5</td> <td>-19.6</td> <td></td> </tr> <tr> <td>825.50</td> <td>11.42</td> <td>H</td> <td>3.0</td> <td>-0.9</td> <td>7.43</td> <td>38.5</td> <td>-31.1</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>831.50</td> <td>24.64</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>20.66</td> <td>38.5</td> <td>-17.8</td> <td></td> </tr> <tr> <td>831.50</td> <td>12.75</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>8.77</td> <td>38.5</td> <td>-29.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>847.50</td> <td>23.86</td> <td>V</td> <td>3.1</td> <td>-0.9</td> <td>19.92</td> <td>38.5</td> <td>-18.6</td> <td></td> </tr> <tr> <td>847.50</td> <td>13.93</td> <td>H</td> <td>3.1</td> <td>-0.9</td> <td>9.99</td> <td>38.5</td> <td>-28.5</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									825.50	22.84	V	3.0	-0.9	18.85	38.5	-19.6		825.50	11.42	H	3.0	-0.9	7.43	38.5	-31.1		Mid Ch									831.50	24.64	V	3.1	-0.9	20.66	38.5	-17.8		831.50	12.75	H	3.1	-0.9	8.77	38.5	-29.7		High Ch									847.50	23.86	V	3.1	-0.9	19.92	38.5	-18.6		847.50	13.93	H	3.1	-0.9	9.99	38.5	-28.5
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
825.50	22.84	V	3.0	-0.9	18.85	38.5	-19.6																																																																																											
825.50	11.42	H	3.0	-0.9	7.43	38.5	-31.1																																																																																											
Mid Ch																																																																																																		
831.50	24.64	V	3.1	-0.9	20.66	38.5	-17.8																																																																																											
831.50	12.75	H	3.1	-0.9	8.77	38.5	-29.7																																																																																											
High Ch																																																																																																		
847.50	23.86	V	3.1	-0.9	19.92	38.5	-18.6																																																																																											
847.50	13.93	H	3.1	-0.9	9.99	38.5	-28.5																																																																																											

LTE Band 26 1.4MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-10-16 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_QPSK Band 26 Fundamentals, 1.4MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	824.70	23.42	V	3.0	-1.0	19.43	38.5	-19.1	
	824.70	12.37	H	3.0	-1.0	8.37	38.5	-30.1	
	Mid Ch								
	831.50	25.46	V	3.1	-0.9	21.48	38.5	-17.0	
	831.50	14.21	H	3.1	-0.9	10.23	38.5	-28.3	
High Ch									
848.30	25.26	V	3.1	-0.9	21.32	38.5	-17.2		
848.30	15.22	H	3.1	-0.9	11.28	38.5	-27.2		
LTE Band 26 1.4MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-10-16 Test Engineer: 20882 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_16QAM Band 26 Fundamentals, 1.4MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	824.70	22.35	V	3.0	-1.0	18.36	38.5	-20.1	
	824.70	11.29	H	3.0	-1.0	7.29	38.5	-31.2	
	Mid Ch								
	831.50	24.39	V	3.1	-0.9	20.41	38.5	-18.1	
	831.50	12.86	H	3.1	-0.9	8.88	38.5	-29.6	
High Ch									
848.30	23.76	V	3.1	-0.9	19.82	38.5	-18.7		
848.30	14.12	H	3.1	-0.9	10.18	38.5	-28.3		

LTE Band 41 (PC2)

LTE Band 41 20MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																										
	<p> Company: Samsung Project #: 4789651209 Date: 2020-11-10 Test Engineer: 22943 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_QPSK Band 41 Fundamentals, 20MHz Bandwidth </p> <p> Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable </p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>Low Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2506.00</td> <td>12.46</td> <td>V</td> <td>5.3</td> <td>10.2</td> <td>17.36</td> <td>33.0</td> <td>-15.6</td> <td></td> </tr> <tr> <td>2506.00</td> <td>16.50</td> <td>H</td> <td>5.3</td> <td>10.2</td> <td>21.41</td> <td>33.0</td> <td>-11.6</td> <td></td> </tr> <tr> <td>Mid Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2593.00</td> <td>16.02</td> <td>V</td> <td>5.4</td> <td>10.1</td> <td>20.76</td> <td>33.0</td> <td>-12.2</td> <td></td> </tr> <tr> <td>2593.00</td> <td>18.94</td> <td>H</td> <td>5.4</td> <td>10.1</td> <td>23.68</td> <td>33.0</td> <td>-9.3</td> <td></td> </tr> <tr> <td>High Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2680.00</td> <td>14.81</td> <td>V</td> <td>5.5</td> <td>10.2</td> <td>19.51</td> <td>33.0</td> <td>-13.5</td> <td></td> </tr> <tr> <td>2680.00</td> <td>18.29</td> <td>H</td> <td>5.5</td> <td>10.2</td> <td>23.00</td> <td>33.0</td> <td>-10.0</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									2506.00	12.46	V	5.3	10.2	17.36	33.0	-15.6		2506.00	16.50	H	5.3	10.2	21.41	33.0	-11.6		Mid Ch									2593.00	16.02	V	5.4	10.1	20.76	33.0	-12.2		2593.00	18.94	H	5.4	10.1	23.68	33.0	-9.3		High Ch									2680.00	14.81	V	5.5	10.2	19.51	33.0	-13.5		2680.00	18.29	H	5.5	10.2	23.00	33.0	-10.0	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																			
Low Ch																																																																																											
2506.00	12.46	V	5.3	10.2	17.36	33.0	-15.6																																																																																				
2506.00	16.50	H	5.3	10.2	21.41	33.0	-11.6																																																																																				
Mid Ch																																																																																											
2593.00	16.02	V	5.4	10.1	20.76	33.0	-12.2																																																																																				
2593.00	18.94	H	5.4	10.1	23.68	33.0	-9.3																																																																																				
High Ch																																																																																											
2680.00	14.81	V	5.5	10.2	19.51	33.0	-13.5																																																																																				
2680.00	18.29	H	5.5	10.2	23.00	33.0	-10.0																																																																																				
LTE Band 41 20MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																										
	<p> Company: Samsung Project #: 4789651209 Date: 2020-11-10 Test Engineer: 22943 Configuration: EUT, X-Position Location: Chamber 2 Mode: LTE_16QAM Band 41 Fundamentals, 20MHz Bandwidth </p> <p> Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable </p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>Low Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2506.00</td> <td>12.13</td> <td>V</td> <td>5.3</td> <td>10.2</td> <td>17.03</td> <td>33.0</td> <td>-16.0</td> <td></td> </tr> <tr> <td>2506.00</td> <td>16.16</td> <td>H</td> <td>5.3</td> <td>10.2</td> <td>21.07</td> <td>33.0</td> <td>-11.9</td> <td></td> </tr> <tr> <td>Mid Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2593.00</td> <td>15.44</td> <td>V</td> <td>5.4</td> <td>10.1</td> <td>20.18</td> <td>33.0</td> <td>-12.8</td> <td></td> </tr> <tr> <td>2593.00</td> <td>18.25</td> <td>H</td> <td>5.4</td> <td>10.1</td> <td>22.99</td> <td>33.0</td> <td>-10.0</td> <td></td> </tr> <tr> <td>High Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2680.00</td> <td>13.47</td> <td>V</td> <td>5.5</td> <td>10.2</td> <td>18.17</td> <td>33.0</td> <td>-14.8</td> <td></td> </tr> <tr> <td>2680.00</td> <td>17.38</td> <td>H</td> <td>5.5</td> <td>10.2</td> <td>22.09</td> <td>33.0</td> <td>-10.9</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									2506.00	12.13	V	5.3	10.2	17.03	33.0	-16.0		2506.00	16.16	H	5.3	10.2	21.07	33.0	-11.9		Mid Ch									2593.00	15.44	V	5.4	10.1	20.18	33.0	-12.8		2593.00	18.25	H	5.4	10.1	22.99	33.0	-10.0		High Ch									2680.00	13.47	V	5.5	10.2	18.17	33.0	-14.8		2680.00	17.38	H	5.5	10.2	22.09	33.0	-10.9	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																			
Low Ch																																																																																											
2506.00	12.13	V	5.3	10.2	17.03	33.0	-16.0																																																																																				
2506.00	16.16	H	5.3	10.2	21.07	33.0	-11.9																																																																																				
Mid Ch																																																																																											
2593.00	15.44	V	5.4	10.1	20.18	33.0	-12.8																																																																																				
2593.00	18.25	H	5.4	10.1	22.99	33.0	-10.0																																																																																				
High Ch																																																																																											
2680.00	13.47	V	5.5	10.2	18.17	33.0	-14.8																																																																																				
2680.00	17.38	H	5.5	10.2	22.09	33.0	-10.9																																																																																				

LTE Band 41 15MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-11-10																																																																																																	
	Test Engineer: 22943																																																																																																	
	Configuration: EUT, X-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_QPSK Band 41 Fundamentals, 15MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>2503.50</td> <td>14.22</td> <td>V</td> <td>5.3</td> <td>10.2</td> <td>19.13</td> <td>33.0</td> <td>-13.9</td> <td></td> </tr> <tr> <td>2503.50</td> <td>16.93</td> <td>H</td> <td>5.3</td> <td>10.2</td> <td>21.85</td> <td>33.0</td> <td>-11.2</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>2593.00</td> <td>14.39</td> <td>V</td> <td>5.4</td> <td>10.1</td> <td>19.13</td> <td>33.0</td> <td>-13.9</td> <td></td> </tr> <tr> <td>2593.00</td> <td>18.75</td> <td>H</td> <td>5.4</td> <td>10.1</td> <td>23.49</td> <td>33.0</td> <td>-9.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>2682.50</td> <td>15.09</td> <td>V</td> <td>5.5</td> <td>10.2</td> <td>19.79</td> <td>33.0</td> <td>-13.2</td> <td></td> </tr> <tr> <td>2682.50</td> <td>17.27</td> <td>H</td> <td>5.5</td> <td>10.2</td> <td>21.98</td> <td>33.0</td> <td>-11.0</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									2503.50	14.22	V	5.3	10.2	19.13	33.0	-13.9		2503.50	16.93	H	5.3	10.2	21.85	33.0	-11.2		Mid Ch									2593.00	14.39	V	5.4	10.1	19.13	33.0	-13.9		2593.00	18.75	H	5.4	10.1	23.49	33.0	-9.5		High Ch									2682.50	15.09	V	5.5	10.2	19.79	33.0	-13.2		2682.50	17.27	H	5.5	10.2	21.98	33.0	-11.0
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
2503.50	14.22	V	5.3	10.2	19.13	33.0	-13.9																																																																																											
2503.50	16.93	H	5.3	10.2	21.85	33.0	-11.2																																																																																											
Mid Ch																																																																																																		
2593.00	14.39	V	5.4	10.1	19.13	33.0	-13.9																																																																																											
2593.00	18.75	H	5.4	10.1	23.49	33.0	-9.5																																																																																											
High Ch																																																																																																		
2682.50	15.09	V	5.5	10.2	19.79	33.0	-13.2																																																																																											
2682.50	17.27	H	5.5	10.2	21.98	33.0	-11.0																																																																																											
LTE Band 41 15MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-11-10																																																																																																	
	Test Engineer: 22943																																																																																																	
	Configuration: EUT, X-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_16QAM Band 41 Fundamentals, 15MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>2503.50</td> <td>13.30</td> <td>V</td> <td>5.3</td> <td>10.2</td> <td>18.21</td> <td>33.0</td> <td>-14.8</td> <td></td> </tr> <tr> <td>2503.50</td> <td>16.69</td> <td>H</td> <td>5.3</td> <td>10.2</td> <td>21.61</td> <td>33.0</td> <td>-11.4</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>2593.00</td> <td>13.99</td> <td>V</td> <td>5.4</td> <td>10.1</td> <td>18.73</td> <td>33.0</td> <td>-14.3</td> <td></td> </tr> <tr> <td>2593.00</td> <td>18.30</td> <td>H</td> <td>5.4</td> <td>10.1</td> <td>23.04</td> <td>33.0</td> <td>-10.0</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>2682.50</td> <td>15.01</td> <td>V</td> <td>5.5</td> <td>10.2</td> <td>19.71</td> <td>33.0</td> <td>-13.3</td> <td></td> </tr> <tr> <td>2682.50</td> <td>17.02</td> <td>H</td> <td>5.5</td> <td>10.2</td> <td>21.73</td> <td>33.0</td> <td>-11.3</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									2503.50	13.30	V	5.3	10.2	18.21	33.0	-14.8		2503.50	16.69	H	5.3	10.2	21.61	33.0	-11.4		Mid Ch									2593.00	13.99	V	5.4	10.1	18.73	33.0	-14.3		2593.00	18.30	H	5.4	10.1	23.04	33.0	-10.0		High Ch									2682.50	15.01	V	5.5	10.2	19.71	33.0	-13.3		2682.50	17.02	H	5.5	10.2	21.73	33.0	-11.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
2503.50	13.30	V	5.3	10.2	18.21	33.0	-14.8																																																																																											
2503.50	16.69	H	5.3	10.2	21.61	33.0	-11.4																																																																																											
Mid Ch																																																																																																		
2593.00	13.99	V	5.4	10.1	18.73	33.0	-14.3																																																																																											
2593.00	18.30	H	5.4	10.1	23.04	33.0	-10.0																																																																																											
High Ch																																																																																																		
2682.50	15.01	V	5.5	10.2	19.71	33.0	-13.3																																																																																											
2682.50	17.02	H	5.5	10.2	21.73	33.0	-11.3																																																																																											

LTE Band 41 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-11-10 Test Engineer: 20896 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_QPSK Band 41 Fundamentals, 10MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	2501.00	14.94	V	5.3	10.2	19.86	33.0	-13.1	
	2501.00	17.09	H	5.3	10.2	22.01	33.0	-11.0	
	Mid Ch								
	2593.00	11.59	V	5.4	10.1	16.33	33.0	-16.7	
	2593.00	18.28	H	5.4	10.1	23.02	33.0	-10.0	
High Ch									
2685.00	14.77	V	5.5	10.2	19.48	33.0	-13.5		
2685.00	17.60	H	5.5	10.2	22.30	33.0	-10.7		
LTE Band 41 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-11-10 Test Engineer: 20896 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_16QAM Band 41 Fundamentals, 10MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	2501.00	13.68	V	5.3	10.2	18.60	33.0	-14.4	
	2501.00	16.54	H	5.3	10.2	21.46	33.0	-11.5	
	Mid Ch								
	2593.00	11.09	V	5.4	10.1	15.83	33.0	-17.2	
	2593.00	17.83	H	5.4	10.1	22.57	33.0	-10.4	
High Ch									
2685.00	14.60	V	5.5	10.2	19.31	33.0	-13.7		
2685.00	16.75	H	5.5	10.2	21.45	33.0	-11.5		

LTE Band 41 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-11-10																																																																																																	
	Test Engineer: 20896																																																																																																	
	Configuration: EUT / X-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_QPSK Band 41 Fundamentals, 5MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>2498.50</td> <td>14.36</td> <td>V</td> <td>5.3</td> <td>10.2</td> <td>19.30</td> <td>33.0</td> <td>-13.7</td> <td></td> </tr> <tr> <td>2498.50</td> <td>16.95</td> <td>H</td> <td>5.3</td> <td>10.2</td> <td>21.88</td> <td>33.0</td> <td>-11.1</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>2593.00</td> <td>15.14</td> <td>V</td> <td>5.4</td> <td>10.1</td> <td>19.88</td> <td>33.0</td> <td>-13.1</td> <td></td> </tr> <tr> <td>2593.00</td> <td>18.75</td> <td>H</td> <td>5.4</td> <td>10.1</td> <td>23.49</td> <td>33.0</td> <td>-9.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>2687.50</td> <td>14.86</td> <td>V</td> <td>5.5</td> <td>10.2</td> <td>19.58</td> <td>33.0</td> <td>-13.4</td> <td></td> </tr> <tr> <td>2687.50</td> <td>17.26</td> <td>H</td> <td>5.5</td> <td>10.2</td> <td>21.98</td> <td>33.0</td> <td>-11.0</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									2498.50	14.36	V	5.3	10.2	19.30	33.0	-13.7		2498.50	16.95	H	5.3	10.2	21.88	33.0	-11.1		Mid Ch									2593.00	15.14	V	5.4	10.1	19.88	33.0	-13.1		2593.00	18.75	H	5.4	10.1	23.49	33.0	-9.5		High Ch									2687.50	14.86	V	5.5	10.2	19.58	33.0	-13.4		2687.50	17.26	H	5.5	10.2	21.98	33.0	-11.0
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
2498.50	14.36	V	5.3	10.2	19.30	33.0	-13.7																																																																																											
2498.50	16.95	H	5.3	10.2	21.88	33.0	-11.1																																																																																											
Mid Ch																																																																																																		
2593.00	15.14	V	5.4	10.1	19.88	33.0	-13.1																																																																																											
2593.00	18.75	H	5.4	10.1	23.49	33.0	-9.5																																																																																											
High Ch																																																																																																		
2687.50	14.86	V	5.5	10.2	19.58	33.0	-13.4																																																																																											
2687.50	17.26	H	5.5	10.2	21.98	33.0	-11.0																																																																																											
LTE Band 41 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-11-10																																																																																																	
	Test Engineer: 20896																																																																																																	
	Configuration: EUT / X-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_16QAM Band 41 Fundamentals, 5MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>2498.50</td> <td>14.09</td> <td>V</td> <td>5.3</td> <td>10.2</td> <td>19.03</td> <td>33.0</td> <td>-14.0</td> <td></td> </tr> <tr> <td>2498.50</td> <td>17.12</td> <td>H</td> <td>5.3</td> <td>10.2</td> <td>22.05</td> <td>33.0</td> <td>-11.0</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>2593.00</td> <td>14.38</td> <td>V</td> <td>5.4</td> <td>10.1</td> <td>19.12</td> <td>33.0</td> <td>-13.9</td> <td></td> </tr> <tr> <td>2593.00</td> <td>17.99</td> <td>H</td> <td>5.4</td> <td>10.1</td> <td>22.73</td> <td>33.0</td> <td>-10.3</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>2687.50</td> <td>14.62</td> <td>V</td> <td>5.5</td> <td>10.2</td> <td>19.34</td> <td>33.0</td> <td>-13.7</td> <td></td> </tr> <tr> <td>2687.50</td> <td>17.06</td> <td>H</td> <td>5.5</td> <td>10.2</td> <td>21.78</td> <td>33.0</td> <td>-11.2</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									2498.50	14.09	V	5.3	10.2	19.03	33.0	-14.0		2498.50	17.12	H	5.3	10.2	22.05	33.0	-11.0		Mid Ch									2593.00	14.38	V	5.4	10.1	19.12	33.0	-13.9		2593.00	17.99	H	5.4	10.1	22.73	33.0	-10.3		High Ch									2687.50	14.62	V	5.5	10.2	19.34	33.0	-13.7		2687.50	17.06	H	5.5	10.2	21.78	33.0	-11.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
2498.50	14.09	V	5.3	10.2	19.03	33.0	-14.0																																																																																											
2498.50	17.12	H	5.3	10.2	22.05	33.0	-11.0																																																																																											
Mid Ch																																																																																																		
2593.00	14.38	V	5.4	10.1	19.12	33.0	-13.9																																																																																											
2593.00	17.99	H	5.4	10.1	22.73	33.0	-10.3																																																																																											
High Ch																																																																																																		
2687.50	14.62	V	5.5	10.2	19.34	33.0	-13.7																																																																																											
2687.50	17.06	H	5.5	10.2	21.78	33.0	-11.2																																																																																											

LTE Band 66

LTE Band 66 20MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company:		Samsung						
	Project #:		4789651209						
	Date:		2020-11-02						
	Test Engineer:		20881						
	Configuration:		EUT, Z-Position						
	Location:		Chamber 2						
	Mode:		LTE_QPSK Band 66 Fundamentals, 20MHz Bandwidth						
	Test Equipment:		Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch									
1720.00	13.63	V	4.4	9.6	18.87	30.0	-11.1		
1720.00	16.64	H	4.4	9.6	21.87	30.0	-8.1		
Mid Ch									
1745.00	15.22	V	4.4	9.7	20.50	30.0	-9.5		
1745.00	18.34	H	4.4	9.7	23.62	30.0	-6.4		
High Ch									
1770.00	14.07	V	4.4	9.7	19.34	30.0	-10.7		
1770.00	17.45	H	4.4	9.7	22.73	30.0	-7.3		

LTE Band 66 20MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company:		Samsung						
	Project #:		4789651209						
	Date:		2020-11-02						
	Test Engineer:		20881						
	Configuration:		EUT, Z-Position						
	Location:		Chamber 2						
	Mode:		LTE_16QAM Band 66 Fundamentals, 20MHz Bandwidth						
	Test Equipment:		Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch									
1720.00	12.57	V	4.4	9.6	17.81	30.0	-12.2		
1720.00	15.32	H	4.4	9.6	20.55	30.0	-9.4		
Mid Ch									
1745.00	14.16	V	4.4	9.7	19.44	30.0	-10.6		
1745.00	17.40	H	4.4	9.7	22.68	30.0	-7.3		
High Ch									
1770.00	13.52	V	4.4	9.7	18.79	30.0	-11.2		
1770.00	16.59	H	4.4	9.7	21.87	30.0	-8.1		

LTE Band 66 15MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-11-02																																																																																																	
	Test Engineer: 20881																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_QPSK Band 66 Fundamentals, 15MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1717.50</td> <td>14.90</td> <td>V</td> <td>4.4</td> <td>9.6</td> <td>20.13</td> <td>30.0</td> <td>-9.9</td> <td></td> </tr> <tr> <td>1717.50</td> <td>17.81</td> <td>H</td> <td>4.4</td> <td>9.6</td> <td>23.04</td> <td>30.0</td> <td>-7.0</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1745.00</td> <td>14.78</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>20.06</td> <td>30.0</td> <td>-9.9</td> <td></td> </tr> <tr> <td>1745.00</td> <td>18.26</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>23.54</td> <td>30.0</td> <td>-6.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1772.50</td> <td>14.06</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>19.33</td> <td>30.0</td> <td>-10.7</td> <td></td> </tr> <tr> <td>1772.50</td> <td>17.87</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>23.14</td> <td>30.0</td> <td>-6.9</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1717.50	14.90	V	4.4	9.6	20.13	30.0	-9.9		1717.50	17.81	H	4.4	9.6	23.04	30.0	-7.0		Mid Ch									1745.00	14.78	V	4.4	9.7	20.06	30.0	-9.9		1745.00	18.26	H	4.4	9.7	23.54	30.0	-6.5		High Ch									1772.50	14.06	V	4.4	9.7	19.33	30.0	-10.7		1772.50	17.87	H	4.4	9.7	23.14	30.0	-6.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1717.50	14.90	V	4.4	9.6	20.13	30.0	-9.9																																																																																											
1717.50	17.81	H	4.4	9.6	23.04	30.0	-7.0																																																																																											
Mid Ch																																																																																																		
1745.00	14.78	V	4.4	9.7	20.06	30.0	-9.9																																																																																											
1745.00	18.26	H	4.4	9.7	23.54	30.0	-6.5																																																																																											
High Ch																																																																																																		
1772.50	14.06	V	4.4	9.7	19.33	30.0	-10.7																																																																																											
1772.50	17.87	H	4.4	9.7	23.14	30.0	-6.9																																																																																											
LTE Band 66 15MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-11-02																																																																																																	
	Test Engineer: 20881																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_16QAM Band 66 Fundamentals, 15MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1717.50</td> <td>13.89</td> <td>V</td> <td>4.4</td> <td>9.6</td> <td>19.12</td> <td>30.0</td> <td>-10.9</td> <td></td> </tr> <tr> <td>1717.50</td> <td>16.64</td> <td>H</td> <td>4.4</td> <td>9.6</td> <td>21.87</td> <td>30.0</td> <td>-8.1</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1745.00</td> <td>13.61</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>18.89</td> <td>30.0</td> <td>-11.1</td> <td></td> </tr> <tr> <td>1745.00</td> <td>16.83</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>22.11</td> <td>30.0</td> <td>-7.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1772.50</td> <td>13.01</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>18.28</td> <td>30.0</td> <td>-11.7</td> <td></td> </tr> <tr> <td>1772.50</td> <td>16.71</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>21.98</td> <td>30.0</td> <td>-8.0</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1717.50	13.89	V	4.4	9.6	19.12	30.0	-10.9		1717.50	16.64	H	4.4	9.6	21.87	30.0	-8.1		Mid Ch									1745.00	13.61	V	4.4	9.7	18.89	30.0	-11.1		1745.00	16.83	H	4.4	9.7	22.11	30.0	-7.9		High Ch									1772.50	13.01	V	4.4	9.7	18.28	30.0	-11.7		1772.50	16.71	H	4.4	9.7	21.98	30.0	-8.0
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1717.50	13.89	V	4.4	9.6	19.12	30.0	-10.9																																																																																											
1717.50	16.64	H	4.4	9.6	21.87	30.0	-8.1																																																																																											
Mid Ch																																																																																																		
1745.00	13.61	V	4.4	9.7	18.89	30.0	-11.1																																																																																											
1745.00	16.83	H	4.4	9.7	22.11	30.0	-7.9																																																																																											
High Ch																																																																																																		
1772.50	13.01	V	4.4	9.7	18.28	30.0	-11.7																																																																																											
1772.50	16.71	H	4.4	9.7	21.98	30.0	-8.0																																																																																											

LTE Band 66 10MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-11-02 Test Engineer: 20881 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 66 Fundamentals, 10MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1715.00	14.61	V	4.4	9.6	19.84	30.0	-10.2	
	1715.00	17.45	H	4.4	9.6	22.67	30.0	-7.3	
	Mid Ch								
	1745.00	15.24	V	4.4	9.7	20.52	30.0	-9.5	
	1745.00	18.01	H	4.4	9.7	23.29	30.0	-6.7	
High Ch									
1775.00	13.64	V	4.4	9.7	18.91	30.0	-11.1		
1775.00	17.67	H	4.4	9.7	22.94	30.0	-7.1		
LTE Band 66 10MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company: Samsung Project #: 4789651209 Date: 2020-11-02 Test Engineer: 20881 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 66 Fundamentals, 10MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1715.00	13.48	V	4.4	9.6	18.71	30.0	-11.3	
	1715.00	16.46	H	4.4	9.6	21.68	30.0	-8.3	
	Mid Ch								
	1745.00	14.20	V	4.4	9.7	19.48	30.0	-10.5	
	1745.00	17.21	H	4.4	9.7	22.49	30.0	-7.5	
High Ch									
1775.00	12.54	V	4.4	9.7	17.81	30.0	-12.2		
1775.00	16.28	H	4.4	9.7	21.55	30.0	-8.5		

LTE Band 66 5MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																									
	<p> Company: Samsung Project #: 4789651209 Date: 2020-11-02 Test Engineer: 20881 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 66 Fundamentals, 5MHz Bandwidth </p> <p> Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable </p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1712.50</td> <td>14.30</td> <td>V</td> <td>4.4</td> <td>9.6</td> <td>19.52</td> <td>30.0</td> <td>-10.5</td> <td></td> </tr> <tr> <td>1712.50</td> <td>17.14</td> <td>H</td> <td>4.4</td> <td>9.6</td> <td>22.36</td> <td>30.0</td> <td>-7.6</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1745.00</td> <td>15.10</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>20.38</td> <td>30.0</td> <td>-9.6</td> <td></td> </tr> <tr> <td>1745.00</td> <td>18.29</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>23.57</td> <td>30.0</td> <td>-6.4</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1777.50</td> <td>14.16</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>19.43</td> <td>30.0</td> <td>-10.6</td> <td></td> </tr> <tr> <td>1777.50</td> <td>17.41</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>22.67</td> <td>30.0</td> <td>-7.3</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1712.50	14.30	V	4.4	9.6	19.52	30.0	-10.5		1712.50	17.14	H	4.4	9.6	22.36	30.0	-7.6		Mid Ch									1745.00	15.10	V	4.4	9.7	20.38	30.0	-9.6		1745.00	18.29	H	4.4	9.7	23.57	30.0	-6.4		High Ch									1777.50	14.16	V	4.4	9.7	19.43	30.0	-10.6		1777.50	17.41	H	4.4	9.7	22.67	30.0	-7.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																		
Low Ch																																																																																										
1712.50	14.30	V	4.4	9.6	19.52	30.0	-10.5																																																																																			
1712.50	17.14	H	4.4	9.6	22.36	30.0	-7.6																																																																																			
Mid Ch																																																																																										
1745.00	15.10	V	4.4	9.7	20.38	30.0	-9.6																																																																																			
1745.00	18.29	H	4.4	9.7	23.57	30.0	-6.4																																																																																			
High Ch																																																																																										
1777.50	14.16	V	4.4	9.7	19.43	30.0	-10.6																																																																																			
1777.50	17.41	H	4.4	9.7	22.67	30.0	-7.3																																																																																			
LTE Band 66 5MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																									
	<p> Company: Samsung Project #: 4789651209 Date: 2020-11-02 Test Engineer: 20881 Configuration: EUT, Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 66 Fundamentals, 5MHz Bandwidth </p> <p> Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable </p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1712.50</td> <td>13.09</td> <td>V</td> <td>4.4</td> <td>9.6</td> <td>18.31</td> <td>30.0</td> <td>-11.7</td> <td></td> </tr> <tr> <td>1712.50</td> <td>15.95</td> <td>H</td> <td>4.4</td> <td>9.6</td> <td>21.17</td> <td>30.0</td> <td>-8.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1745.00</td> <td>14.01</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>19.29</td> <td>30.0</td> <td>-10.7</td> <td></td> </tr> <tr> <td>1745.00</td> <td>17.00</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>22.28</td> <td>30.0</td> <td>-7.7</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1777.50</td> <td>12.97</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>18.24</td> <td>30.0</td> <td>-11.8</td> <td></td> </tr> <tr> <td>1777.50</td> <td>16.44</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>21.70</td> <td>30.0</td> <td>-8.3</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1712.50	13.09	V	4.4	9.6	18.31	30.0	-11.7		1712.50	15.95	H	4.4	9.6	21.17	30.0	-8.8		Mid Ch									1745.00	14.01	V	4.4	9.7	19.29	30.0	-10.7		1745.00	17.00	H	4.4	9.7	22.28	30.0	-7.7		High Ch									1777.50	12.97	V	4.4	9.7	18.24	30.0	-11.8		1777.50	16.44	H	4.4	9.7	21.70	30.0	-8.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																		
Low Ch																																																																																										
1712.50	13.09	V	4.4	9.6	18.31	30.0	-11.7																																																																																			
1712.50	15.95	H	4.4	9.6	21.17	30.0	-8.8																																																																																			
Mid Ch																																																																																										
1745.00	14.01	V	4.4	9.7	19.29	30.0	-10.7																																																																																			
1745.00	17.00	H	4.4	9.7	22.28	30.0	-7.7																																																																																			
High Ch																																																																																										
1777.50	12.97	V	4.4	9.7	18.24	30.0	-11.8																																																																																			
1777.50	16.44	H	4.4	9.7	21.70	30.0	-8.3																																																																																			

LTE Band 66 3MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-11-03																																																																																																	
	Test Engineer: 22943																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_QPSK Band 66 Fundamentals, 3MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1711.50</td> <td>13.96</td> <td>V</td> <td>4.4</td> <td>9.6</td> <td>19.17</td> <td>30.0</td> <td>-10.8</td> <td></td> </tr> <tr> <td>1711.50</td> <td>16.94</td> <td>H</td> <td>4.4</td> <td>9.6</td> <td>22.16</td> <td>30.0</td> <td>-7.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1745.00</td> <td>14.69</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>19.97</td> <td>30.0</td> <td>-10.0</td> <td></td> </tr> <tr> <td>1745.00</td> <td>17.81</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>23.09</td> <td>30.0</td> <td>-6.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1778.50</td> <td>14.43</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>19.69</td> <td>30.0</td> <td>-10.3</td> <td></td> </tr> <tr> <td>1778.50</td> <td>17.69</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>22.95</td> <td>30.0</td> <td>-7.0</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1711.50	13.96	V	4.4	9.6	19.17	30.0	-10.8		1711.50	16.94	H	4.4	9.6	22.16	30.0	-7.8		Mid Ch									1745.00	14.69	V	4.4	9.7	19.97	30.0	-10.0		1745.00	17.81	H	4.4	9.7	23.09	30.0	-6.9		High Ch									1778.50	14.43	V	4.4	9.7	19.69	30.0	-10.3		1778.50	17.69	H	4.4	9.7	22.95	30.0	-7.0
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1711.50	13.96	V	4.4	9.6	19.17	30.0	-10.8																																																																																											
1711.50	16.94	H	4.4	9.6	22.16	30.0	-7.8																																																																																											
Mid Ch																																																																																																		
1745.00	14.69	V	4.4	9.7	19.97	30.0	-10.0																																																																																											
1745.00	17.81	H	4.4	9.7	23.09	30.0	-6.9																																																																																											
High Ch																																																																																																		
1778.50	14.43	V	4.4	9.7	19.69	30.0	-10.3																																																																																											
1778.50	17.69	H	4.4	9.7	22.95	30.0	-7.0																																																																																											
LTE Band 66 3MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-11-03																																																																																																	
	Test Engineer: 22943																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_16QAM Band 66 Fundamentals, 3MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1711.50</td> <td>12.60</td> <td>V</td> <td>4.4</td> <td>9.6</td> <td>17.81</td> <td>30.0</td> <td>-12.2</td> <td></td> </tr> <tr> <td>1711.50</td> <td>15.48</td> <td>H</td> <td>4.4</td> <td>9.6</td> <td>20.70</td> <td>30.0</td> <td>-9.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1745.00</td> <td>13.55</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>18.83</td> <td>30.0</td> <td>-11.2</td> <td></td> </tr> <tr> <td>1745.00</td> <td>16.60</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>21.88</td> <td>30.0</td> <td>-8.1</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1778.50</td> <td>13.45</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>18.71</td> <td>30.0</td> <td>-11.3</td> <td></td> </tr> <tr> <td>1778.50</td> <td>16.39</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>21.65</td> <td>30.0</td> <td>-8.3</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1711.50	12.60	V	4.4	9.6	17.81	30.0	-12.2		1711.50	15.48	H	4.4	9.6	20.70	30.0	-9.3		Mid Ch									1745.00	13.55	V	4.4	9.7	18.83	30.0	-11.2		1745.00	16.60	H	4.4	9.7	21.88	30.0	-8.1		High Ch									1778.50	13.45	V	4.4	9.7	18.71	30.0	-11.3		1778.50	16.39	H	4.4	9.7	21.65	30.0	-8.3
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1711.50	12.60	V	4.4	9.6	17.81	30.0	-12.2																																																																																											
1711.50	15.48	H	4.4	9.6	20.70	30.0	-9.3																																																																																											
Mid Ch																																																																																																		
1745.00	13.55	V	4.4	9.7	18.83	30.0	-11.2																																																																																											
1745.00	16.60	H	4.4	9.7	21.88	30.0	-8.1																																																																																											
High Ch																																																																																																		
1778.50	13.45	V	4.4	9.7	18.71	30.0	-11.3																																																																																											
1778.50	16.39	H	4.4	9.7	21.65	30.0	-8.3																																																																																											

LTE Band 66 1.4MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-11-03																																																																																																	
	Test Engineer: 22943																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_QPSK Band 66 Fundamentals, 1.4MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1710.70</td> <td>13.89</td> <td>V</td> <td>4.4</td> <td>9.6</td> <td>19.10</td> <td>30.0</td> <td>-10.9</td> <td></td> </tr> <tr> <td>1710.70</td> <td>16.83</td> <td>H</td> <td>4.4</td> <td>9.6</td> <td>22.05</td> <td>30.0</td> <td>-8.0</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1745.00</td> <td>15.30</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>20.58</td> <td>30.0</td> <td>-9.4</td> <td></td> </tr> <tr> <td>1745.00</td> <td>18.41</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>23.69</td> <td>30.0</td> <td>-6.3</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1779.30</td> <td>14.73</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>19.99</td> <td>30.0</td> <td>-10.0</td> <td></td> </tr> <tr> <td>1779.30</td> <td>17.92</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>23.19</td> <td>30.0</td> <td>-6.8</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1710.70	13.89	V	4.4	9.6	19.10	30.0	-10.9		1710.70	16.83	H	4.4	9.6	22.05	30.0	-8.0		Mid Ch									1745.00	15.30	V	4.4	9.7	20.58	30.0	-9.4		1745.00	18.41	H	4.4	9.7	23.69	30.0	-6.3		High Ch									1779.30	14.73	V	4.4	9.7	19.99	30.0	-10.0		1779.30	17.92	H	4.4	9.7	23.19	30.0	-6.8
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1710.70	13.89	V	4.4	9.6	19.10	30.0	-10.9																																																																																											
1710.70	16.83	H	4.4	9.6	22.05	30.0	-8.0																																																																																											
Mid Ch																																																																																																		
1745.00	15.30	V	4.4	9.7	20.58	30.0	-9.4																																																																																											
1745.00	18.41	H	4.4	9.7	23.69	30.0	-6.3																																																																																											
High Ch																																																																																																		
1779.30	14.73	V	4.4	9.7	19.99	30.0	-10.0																																																																																											
1779.30	17.92	H	4.4	9.7	23.19	30.0	-6.8																																																																																											
LTE Band 66 1.4MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
	Company: Samsung																																																																																																	
	Project #: 4789651209																																																																																																	
	Date: 2020-11-03																																																																																																	
	Test Engineer: 22943																																																																																																	
	Configuration: EUT, Z-Position																																																																																																	
	Location: Chamber 2																																																																																																	
	Mode: LTE_16QAM Band 66 Fundamentals, 1.4MHz Bandwidth																																																																																																	
	Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00161451], 8.5m SMA-type Cable																																																																																																	
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1710.70</td> <td>12.34</td> <td>V</td> <td>4.4</td> <td>9.6</td> <td>17.55</td> <td>30.0</td> <td>-12.4</td> <td></td> </tr> <tr> <td>1710.70</td> <td>16.35</td> <td>H</td> <td>4.4</td> <td>9.6</td> <td>21.57</td> <td>30.0</td> <td>-8.4</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1745.00</td> <td>13.77</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>19.05</td> <td>30.0</td> <td>-11.0</td> <td></td> </tr> <tr> <td>1745.00</td> <td>16.82</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>22.10</td> <td>30.0</td> <td>-7.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1779.30</td> <td>13.61</td> <td>V</td> <td>4.4</td> <td>9.7</td> <td>18.87</td> <td>30.0</td> <td>-11.1</td> <td></td> </tr> <tr> <td>1779.30</td> <td>16.55</td> <td>H</td> <td>4.4</td> <td>9.7</td> <td>21.82</td> <td>30.0</td> <td>-8.2</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1710.70	12.34	V	4.4	9.6	17.55	30.0	-12.4		1710.70	16.35	H	4.4	9.6	21.57	30.0	-8.4		Mid Ch									1745.00	13.77	V	4.4	9.7	19.05	30.0	-11.0		1745.00	16.82	H	4.4	9.7	22.10	30.0	-7.9		High Ch									1779.30	13.61	V	4.4	9.7	18.87	30.0	-11.1		1779.30	16.55	H	4.4	9.7	21.82	30.0	-8.2
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1710.70	12.34	V	4.4	9.6	17.55	30.0	-12.4																																																																																											
1710.70	16.35	H	4.4	9.6	21.57	30.0	-8.4																																																																																											
Mid Ch																																																																																																		
1745.00	13.77	V	4.4	9.7	19.05	30.0	-11.0																																																																																											
1745.00	16.82	H	4.4	9.7	22.10	30.0	-7.9																																																																																											
High Ch																																																																																																		
1779.30	13.61	V	4.4	9.7	18.87	30.0	-11.1																																																																																											
1779.30	16.55	H	4.4	9.7	21.82	30.0	-8.2																																																																																											

NR Band n5

		UL Verification Services, Inc. High Frequency Substitution Measurement							
NR Band n5 20MHz QPSK	Company:		Samsung						
	Project #:		4789651209						
	Date:		2020-11-10						
	Test Engineer:		20881						
	Configuration:		EUT, Z-Position						
	Location:		Chamber 1						
	Mode:		LTE_QPSK NR n5 Fundamentals, 20MHz Bandwidth						
	Test Equipment:		Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	834.00	22.73	V	3.1	-0.9	18.76	38.5	-19.7	
	834.00	8.92	H	3.1	-0.9	4.95	38.5	-33.6	
Mid Ch									
836.50	23.17	V	3.1	-0.9	19.20	38.5	-19.3		
836.50	9.14	H	3.1	-0.9	5.17	38.5	-33.3		
High Ch									
839.00	22.77	V	3.1	-0.9	18.81	38.5	-19.7		
839.00	10.37	H	3.1	-0.9	6.41	38.5	-32.1		
		UL Verification Services, Inc. High Frequency Substitution Measurement							
NR Band n5 20MHz 16QAM	Company:		Samsung						
	Project #:		4789651209						
	Date:		2020-11-10						
	Test Engineer:		20881						
	Configuration:		EUT, Z-Position						
	Location:		Chamber 1						
	Mode:		LTE_16QAM NR n5 Fundamentals, 20MHz Bandwidth						
	Test Equipment:		Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	834.00	22.32	V	3.1	-0.9	18.35	38.5	-20.2	
	834.00	8.33	H	3.1	-0.9	4.36	38.5	-34.1	
Mid Ch									
836.50	22.23	V	3.1	-0.9	18.26	38.5	-20.2		
836.50	8.71	H	3.1	-0.9	4.74	38.5	-33.8		
High Ch									
839.00	21.99	V	3.1	-0.9	18.03	38.5	-20.5		
839.00	10.18	H	3.1	-0.9	6.22	38.5	-32.3		

		UL Verification Services, Inc. High Frequency Substitution Measurement							
NR Band n5 15MHz QPSK	Company: Samsung Project #: 4789651209 Date: 2020-11-10 Test Engineer: 20881 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_QPSK NR n5 Fundamentals, 15MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	831.50	22.91	V	3.1	-0.9	18.93	38.5	-19.6	
	831.50	8.78	H	3.1	-0.9	4.80	38.5	-33.7	
	Mid Ch								
	836.50	22.57	V	3.1	-0.9	18.60	38.5	-19.9	
	836.50	10.24	H	3.1	-0.9	6.27	38.5	-32.2	
	High Ch								
841.50	22.51	V	3.1	-0.9	18.55	38.5	-19.9		
841.50	10.70	H	3.1	-0.9	6.74	38.5	-31.8		
		UL Verification Services, Inc. High Frequency Substitution Measurement							
NR Band n5 15MHz 16QAM	Company: Samsung Project #: 4789651209 Date: 2020-11-10 Test Engineer: 20881 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_16QAM NR n5 Fundamentals, 15MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	831.50	22.17	V	3.1	-0.9	18.19	38.5	-20.3	
	831.50	8.15	H	3.1	-0.9	4.17	38.5	-34.3	
	Mid Ch								
	836.50	22.42	V	3.1	-0.9	18.45	38.5	-20.0	
	836.50	9.41	H	3.1	-0.9	5.44	38.5	-33.1	
	High Ch								
841.50	22.27	V	3.1	-0.9	18.31	38.5	-20.2		
841.50	10.26	H	3.1	-0.9	6.30	38.5	-32.2		

		UL Verification Services, Inc. High Frequency Substitution Measurement							
NR Band n5 10MHz QPSK	Company: Samsung Project #: 4789651209 Date: 2020-11-10 Test Engineer: 20881 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_QPSK NR n5 Fundamentals, 10MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	829.00	22.12	V	3.1	-0.9	18.14	38.5	-20.4	
	829.00	8.63	H	3.1	-0.9	4.64	38.5	-33.9	
	Mid Ch								
	836.50	22.66	V	3.1	-0.9	18.69	38.5	-19.8	
	836.50	10.54	H	3.1	-0.9	6.57	38.5	-31.9	
	High Ch								
844.00	22.79	V	3.1	-0.9	18.84	38.5	-19.7		
844.00	9.28	H	3.1	-0.9	5.33	38.5	-33.2		
		UL Verification Services, Inc. High Frequency Substitution Measurement							
NR Band n5 10MHz 16QAM	Company: Samsung Project #: 4789651209 Date: 2020-11-10 Test Engineer: 20881 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_16QAM NR n5 Fundamentals, 10MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	829.00	21.29	V	3.1	-0.9	17.31	38.5	-21.2	
	829.00	8.25	H	3.1	-0.9	4.26	38.5	-34.2	
	Mid Ch								
	836.50	22.42	V	3.1	-0.9	18.45	38.5	-20.0	
	836.50	9.87	H	3.1	-0.9	5.90	38.5	-32.6	
	High Ch								
844.00	22.01	V	3.1	-0.9	18.06	38.5	-20.4		
844.00	8.45	H	3.1	-0.9	4.50	38.5	-34.0		

		UL Verification Services, Inc. High Frequency Substitution Measurement							
NR Band n5 5MHz QPSK	Company: Samsung Project #: 4789651209 Date: 2020-11-10 Test Engineer: 20881 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_QPSK NR n5 Fundamentals, 5MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	826.50	20.71	V	3.0	-0.9	16.72	38.5	-21.8	
	826.50	8.70	H	3.0	-0.9	4.70	38.5	-33.8	
	Mid Ch								
	836.50	22.74	V	3.1	-0.9	18.77	38.5	-19.7	
	836.50	10.38	H	3.1	-0.9	6.41	38.5	-32.1	
	High Ch								
846.50	22.17	V	3.1	-0.9	18.23	38.5	-20.3		
846.50	9.47	H	3.1	-0.9	5.52	38.5	-33.0		
		UL Verification Services, Inc. High Frequency Substitution Measurement							
NR Band n5 5MHz 16QAM	Company: Samsung Project #: 4789651209 Date: 2020-11-10 Test Engineer: 20881 Configuration: EUT, Z-Position Location: Chamber 1 Mode: LTE_16QAM NR n5 Fundamentals, 5MHz Bandwidth								
	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	826.50	19.82	V	3.0	-0.9	15.83	38.5	-22.7	
	826.50	8.17	H	3.0	-0.9	4.17	38.5	-34.3	
	Mid Ch								
	836.50	20.67	V	3.1	-0.9	16.70	38.5	-21.8	
	836.50	9.64	H	3.1	-0.9	5.67	38.5	-32.8	
	High Ch								
846.50	21.85	V	3.1	-0.9	17.91	38.5	-20.6		
846.50	9.16	H	3.1	-0.9	5.21	38.5	-33.3		

NR Band n66

NR Band n66 20MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company:		Samsung						
	Project #:		4789651209						
	Date:		2020-11-11						
	Test Engineer:		20881						
	Configuration:		EUT, Y-Position						
	Location:		Chamber 1						
	Mode:		LTE_QPSK NR n66 Fundamentals, 20MHz Bandwidth						
	Test Equipment:		Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch									
1720.00	16.12	V	4.4	9.6	21.35	30.0	-8.7		
1720.00	4.68	H	4.4	9.6	9.90	30.0	-20.1		
Mid Ch									
1745.00	17.25	V	4.4	9.7	22.52	30.0	-7.5		
1745.00	3.34	H	4.4	9.7	8.61	30.0	-21.4		
High Ch									
1770.00	16.40	V	4.4	9.7	21.67	30.0	-8.3		
1770.00	9.66	H	4.4	9.7	14.93	30.0	-15.1		

NR Band n66 20MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company:		Samsung						
	Project #:		4789651209						
	Date:		2020-11-11						
	Test Engineer:		20881						
	Configuration:		EUT, Y-Position						
	Location:		Chamber 1						
	Mode:		LTE_16QAM NR n66 Fundamentals, 20MHz Bandwidth						
	Test Equipment:		Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch									
1720.00	15.60	V	4.4	9.6	20.83	30.0	-9.2		
1720.00	4.14	H	4.4	9.6	9.36	30.0	-20.6		
Mid Ch									
1745.00	16.55	V	4.4	9.7	21.82	30.0	-8.2		
1745.00	3.12	H	4.4	9.7	8.39	30.0	-21.6		
High Ch									
1770.00	16.12	V	4.4	9.7	21.39	30.0	-8.6		
1770.00	9.13	H	4.4	9.7	14.40	30.0	-15.6		

NR Band n66 15MHz QPSK	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company:		Samsung						
	Project #:		4789651209						
	Date:		2020-11-11						
	Test Engineer:		20881						
	Configuration:		EUT, Y-Position						
	Location:		Chamber 1						
	Mode:		LTE_QPSK NR n66 Fundamentals, 15MHz Bandwidth						
	Test Equipment:		Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch									
1717.50	15.98	V	4.4	9.6	21.20	30.0	-8.8		
1717.50	3.52	H	4.4	9.6	8.75	30.0	-21.3		
Mid Ch									
1745.00	17.12	V	4.4	9.7	22.39	30.0	-7.6		
1745.00	3.37	H	4.4	9.7	8.64	30.0	-21.4		
High Ch									
1772.50	16.58	V	4.4	9.7	21.85	30.0	-8.2		
1772.50	9.84	H	4.4	9.7	15.10	30.0	-14.9		

NR Band n66 15MHz 16QAM	UL Verification Services, Inc. High Frequency Substitution Measurement								
	Company:		Samsung						
	Project #:		4789651209						
	Date:		2020-11-11						
	Test Engineer:		20881						
	Configuration:		EUT, Y-Position						
	Location:		Chamber 1						
	Mode:		LTE_16QAM NR n66 Fundamentals, 15MHz Bandwidth						
	Test Equipment:		Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch									
1717.50	15.20	V	4.4	9.6	20.42	30.0	-9.6		
1717.50	2.78	H	4.4	9.6	8.01	30.0	-22.0		
Mid Ch									
1745.00	16.81	V	4.4	9.7	22.08	30.0	-7.9		
1745.00	3.23	H	4.4	9.7	8.50	30.0	-21.5		
High Ch									
1772.50	15.91	V	4.4	9.7	21.18	30.0	-8.8		
1772.50	9.64	H	4.4	9.7	14.90	30.0	-15.1		

		UL Verification Services, Inc. High Frequency Substitution Measurement							
NR Band n66 10MHz QPSK	Company: Samsung Project #: 4789651209 Date: 2020-11-11 Test Engineer: 20881 Configuration: EUT, Y-Position Location: Chamber 1 Mode: LTE_QPSK NR n66 Fundamentals, 10MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1715.00	16.59	V	4.4	9.6	21.81	30.0	-8.2	
	1715.00	3.38	H	4.4	9.6	8.60	30.0	-21.4	
	Mid Ch								
	1745.00	17.12	V	4.4	9.7	22.39	30.0	-7.6	
	1745.00	3.78	H	4.4	9.7	9.05	30.0	-20.9	
	High Ch								
1775.00	16.47	V	4.4	9.7	21.74	30.0	-8.3		
1775.00	9.86	H	4.4	9.7	15.12	30.0	-14.9		
		UL Verification Services, Inc. High Frequency Substitution Measurement							
NR Band n66 10MHz 16QAM	Company: Samsung Project #: 4789651209 Date: 2020-11-11 Test Engineer: 20881 Configuration: EUT, Y-Position Location: Chamber 1 Mode: LTE_16QAM NR n66 Fundamentals, 10MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1715.00	16.03	V	4.4	9.6	21.25	30.0	-8.8	
	1715.00	3.16	H	4.4	9.6	8.38	30.0	-21.6	
	Mid Ch								
	1745.00	16.39	V	4.4	9.7	21.66	30.0	-8.3	
	1745.00	3.01	H	4.4	9.7	8.28	30.0	-21.7	
	High Ch								
1775.00	15.77	V	4.4	9.7	21.04	30.0	-9.0		
1775.00	8.93	H	4.4	9.7	14.19	30.0	-15.8		

		UL Verification Services, Inc. High Frequency Substitution Measurement							
NR Band n66 5MHz QPSK	Company: Samsung Project #: 4789651209 Date: 2020-11-11 Test Engineer: 20881 Configuration: EUT, Y-Position Location: Chamber 1 Mode: LTE_QPSK NR n66 Fundamentals, 5MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1712.50	15.83	V	4.4	9.6	21.04	30.0	-9.0	
	1712.50	2.90	H	4.4	9.6	8.11	30.0	-21.9	
	Mid Ch								
	1745.00	17.43	V	4.4	9.7	22.70	30.0	-7.3	
	1745.00	4.16	H	4.4	9.7	9.43	30.0	-20.6	
	High Ch								
1777.50	16.89	V	4.4	9.7	22.15	30.0	-7.8		
1777.50	5.82	H	4.4	9.7	11.08	30.0	-18.9		
NR Band n66 5MHz 16QAM	Company: Samsung Project #: 4789651209 Date: 2020-11-11 Test Engineer: 20881 Configuration: EUT, Y-Position Location: Chamber 1 Mode: LTE_16QAM NR n66 Fundamentals, 5MHz Bandwidth								
	Test Equipment: Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1712.50	15.51	V	4.4	9.6	20.72	30.0	-9.3	
	1712.50	2.59	H	4.4	9.6	7.80	30.0	-22.2	
	Mid Ch								
	1745.00	16.32	V	4.4	9.7	21.59	30.0	-8.4	
	1745.00	3.52	H	4.4	9.7	8.79	30.0	-21.2	
	High Ch								
1777.50	16.13	V	4.4	9.7	21.39	30.0	-8.6		
1777.50	5.34	H	4.4	9.7	10.60	30.0	-19.4		

9.6. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53 and §90.691

LIMIT

Part 22.917(a) & Part 24.238(a) & Part 27.53(h) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Part 27.53:

(c)(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

(h) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

(m) (4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Part 90.691(a):

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz. (NOTE : Use 100kHz reference bandwidth)

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.12; ESU40 setting reference to 971168 D01 v03r01

For peak power measurement with a ESU40:

- a) Set the RBW = 100 kHz for emission below 1GHz and 1MHz for emissions above 1GHz
- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points \geq span/RBW;
- g) Trace mode = average(WCDMA, LTE, 5G NR), Max hold(GSM, LTE Band41);;

Note

5G NR: All Waveforms (CP-OFDM vs DFT-s OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

RESULTS

See the following pages.

NOTE : Please refer to section 5.4 for bandwidth and RB setting about LTE / 5G NR bands.

9.6.1. SPURIOUS RADIATION PLOTS

GSM850

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
		Company:	Samsung								
		Project #:	4789651209								
		Date:	2020-10-15								
		Test Engineer:	20881								
		Configuration:	EUT / AC Adapter, Y-Position								
		Location:	Chamber 1								
		Mode:	GPRS 850 MHz Harmonics								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
GSM850 GPRS	Low Ch, 824.2MHz										
		1648.40	11.1	V	3.0	45.3	1.0	-33.2	-13.0	-20.2	
		2472.60	1.2	V	3.0	45.1	1.0	-42.9	-13.0	-29.9	
		3296.80	-9.1	V	3.0	45.3	1.0	-53.4	-13.0	-40.4	
		1648.40	3.2	H	3.0	45.3	1.0	-41.0	-13.0	-28.0	
		2472.60	2.1	H	3.0	45.1	1.0	-42.0	-13.0	-29.0	
		3296.80	-9.1	H	3.0	45.3	1.0	-53.4	-13.0	-40.4	
	Mid Ch, 836.6MHz										
		1673.20	12.1	V	3.0	45.3	1.0	-32.1	-13.0	-19.1	
		2509.80	2.6	V	3.0	45.1	1.0	-41.5	-13.0	-28.5	
		3346.40	-8.7	V	3.0	45.3	1.0	-53.0	-13.0	-40.0	
		1673.20	0.5	H	3.0	45.3	1.0	-43.7	-13.0	-30.7	
		2509.80	3.3	H	3.0	45.1	1.0	-40.8	-13.0	-27.8	
		3346.40	-8.5	H	3.0	45.3	1.0	-52.8	-13.0	-39.8	
	High Ch, 848.8MHz										
		1697.60	4.7	V	3.0	45.2	1.0	-39.5	-13.0	-26.5	
		2546.40	1.1	V	3.0	45.1	1.0	-43.0	-13.0	-30.0	
		3395.20	-8.5	V	3.0	45.3	1.0	-52.8	-13.0	-39.8	
	1697.60	-1.5	H	3.0	45.2	1.0	-45.7	-13.0	-32.7		
	2546.40	1.0	H	3.0	45.1	1.0	-43.1	-13.0	-30.1		
	3395.20	-8.4	H	3.0	45.3	1.0	-52.7	-13.0	-39.7		
		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
		Company:	Samsung								
		Project #:	4789651209								
		Date:	2020-10-15								
		Test Engineer:	20881								
		Configuration:	EUT / AC Adapter, Y-Position								
		Location:	Chamber 1								
		Mode:	EGPRS 850 MHz Harmonics								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
GSM850 EGPRS	Low Ch, 824.2MHz										
		1648.40	-1.0	V	3.0	45.3	1.0	-45.3	-13.0	-32.3	
		2472.60	-10.0	V	3.0	45.1	1.0	-54.1	-13.0	-41.1	
		3296.80	-9.1	V	3.0	45.3	1.0	-53.4	-13.0	-40.4	
		1648.40	-8.0	H	3.0	45.3	1.0	-52.3	-13.0	-39.3	
		2472.60	-10.4	H	3.0	45.1	1.0	-54.4	-13.0	-41.4	
		3296.80	-9.3	H	3.0	45.3	1.0	-53.6	-13.0	-40.6	
	Mid Ch, 836.6MHz										
		1673.20	0.9	V	3.0	45.3	1.0	-43.4	-13.0	-30.4	
		2509.80	-8.7	V	3.0	45.1	1.0	-52.8	-13.0	-39.8	
		3346.40	-8.8	V	3.0	45.3	1.0	-53.2	-13.0	-40.2	
		1673.20	-10.7	H	3.0	45.3	1.0	-55.0	-13.0	-42.0	
		2509.80	-8.4	H	3.0	45.1	1.0	-52.5	-13.0	-39.5	
		3346.40	-8.6	H	3.0	45.3	1.0	-53.0	-13.0	-40.0	
	High Ch, 848.8MHz										
		1697.60	-1.4	V	3.0	45.2	1.0	-45.6	-13.0	-32.6	
		2546.40	-6.0	V	3.0	45.1	1.0	-50.1	-13.0	-37.1	
		3395.20	-8.7	V	3.0	45.3	1.0	-53.0	-13.0	-40.0	
	1697.60	-8.0	H	3.0	45.2	1.0	-52.2	-13.0	-39.2		
	2546.40	-7.7	H	3.0	45.1	1.0	-51.9	-13.0	-38.9		
	3395.20	-8.2	H	3.0	45.3	1.0	-52.6	-13.0	-39.6		

GSM1900

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4789651209							
Date:		2020-10-14							
Test Engineer:		20882							
Configuration:		EUT / AC Adapter, Z-Position							
Location:		Chamber 1							
Mode:		GPRS 1900 MHz Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3700.40	-7.4	V	3.0	45.5	1.0	-51.9	-13.0	-38.9	
5550.60	-1.5	V	3.0	45.4	1.0	-45.9	-13.0	-32.9	
7400.80	-5.2	V	3.0	44.2	1.0	-48.4	-13.0	-35.4	
3700.40	-7.1	H	3.0	45.5	1.0	-51.6	-13.0	-38.6	
5550.60	-7.1	H	3.0	45.4	1.0	-51.5	-13.0	-38.5	
7400.80	-5.0	H	3.0	44.2	1.0	-48.2	-13.0	-35.2	
Mid Ch, 1880MHz									
3760.00	-9.7	V	3.0	45.5	1.0	-54.2	-13.0	-41.2	
5640.00	-3.3	V	3.0	45.4	1.0	-47.7	-13.0	-34.7	
7520.00	-4.8	V	3.0	44.1	1.0	-47.9	-13.0	-34.9	
3760.00	-9.0	H	3.0	45.5	1.0	-53.5	-13.0	-40.5	
5640.00	-0.2	H	3.0	45.4	1.0	-44.6	-13.0	-31.6	
7520.00	-4.5	H	3.0	44.1	1.0	-47.7	-13.0	-34.7	
High Ch, 1909.8MHz									
3819.60	-9.5	V	3.0	45.5	1.0	-54.0	-13.0	-41.0	
5729.40	-6.4	V	3.0	45.4	1.0	-50.7	-13.0	-37.7	
7639.20	-4.8	V	3.0	44.1	1.0	-47.9	-13.0	-34.9	
3819.60	-9.7	H	3.0	45.5	1.0	-54.2	-13.0	-41.2	
5729.40	-6.2	H	3.0	45.4	1.0	-50.5	-13.0	-37.5	
7639.20	-4.6	H	3.0	44.1	1.0	-47.7	-13.0	-34.7	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4789651209							
Date:		2020-10-14							
Test Engineer:		20882							
Configuration:		EUT / AC Adapter, Z-Position							
Location:		Chamber 1							
Mode:		EGPRS 1900 MHz Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3700.40	-6.9	V	3.0	45.5	1.0	-51.3	-13.0	-38.3	
5550.60	-4.4	V	3.0	45.4	1.0	-48.8	-13.0	-35.8	
7400.80	-5.2	V	3.0	44.2	1.0	-48.4	-13.0	-35.4	
3700.40	-7.7	H	3.0	45.5	1.0	-52.2	-13.0	-39.2	
5550.60	-7.7	H	3.0	45.4	1.0	-52.1	-13.0	-39.1	
7400.80	-5.0	H	3.0	44.2	1.0	-48.2	-13.0	-35.2	
Mid Ch, 1880MHz									
3760.00	-7.4	V	3.0	45.5	1.0	-51.9	-13.0	-38.9	
5640.00	-4.1	V	3.0	45.4	1.0	-48.4	-13.0	-35.4	
7520.00	-5.1	V	3.0	44.1	1.0	-48.2	-13.0	-35.2	
3760.00	-10.1	H	3.0	45.5	1.0	-54.6	-13.0	-41.6	
5640.00	-6.6	H	3.0	45.4	1.0	-51.0	-13.0	-38.0	
7520.00	-4.8	H	3.0	44.1	1.0	-47.9	-13.0	-34.9	
High Ch, 1909.8MHz									
3819.60	-10.3	V	3.0	45.5	1.0	-54.8	-13.0	-41.8	
5729.40	-6.6	V	3.0	45.4	1.0	-50.9	-13.0	-37.9	
7639.20	-4.9	V	3.0	44.1	1.0	-48.0	-13.0	-35.0	
3819.60	-8.6	H	3.0	45.5	1.0	-53.1	-13.0	-40.1	
5729.40	-7.4	H	3.0	45.4	1.0	-51.8	-13.0	-38.8	
7639.20	-4.5	H	3.0	44.1	1.0	-47.6	-13.0	-34.6	

WCDMA Band 5

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4789651209							
Date:		2020-10-16							
Test Engineer:		20882							
Configuration:		EUT / AC Adapter, Z-Position							
Location:		Chamber 2							
Mode:		Rel99 Band 5 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.4MHz									
1652.80	-15.8	V	3.0	40.7	1.0	-55.5	-13.0	-42.5	
2479.20	-12.8	V	3.0	41.3	1.0	-53.1	-13.0	-40.1	
3305.60	-10.1	V	3.0	42.1	1.0	-51.1	-13.0	-38.1	
1652.80	-15.7	H	3.0	40.7	1.0	-55.4	-13.0	-42.4	
2479.20	-12.4	H	3.0	41.3	1.0	-52.7	-13.0	-39.7	
3305.60	-10.1	H	3.0	42.1	1.0	-51.1	-13.0	-38.1	
Mid Ch, 836.6MHz									
1673.20	-15.5	V	3.0	40.7	1.0	-55.2	-13.0	-42.2	
2509.80	-12.6	V	3.0	41.4	1.0	-52.9	-13.0	-39.9	
3346.40	-9.8	V	3.0	42.1	1.0	-50.8	-13.0	-37.8	
1673.20	-15.6	H	3.0	40.7	1.0	-55.3	-13.0	-42.3	
2509.80	-12.3	H	3.0	41.4	1.0	-52.7	-13.0	-39.7	
3346.40	-9.8	H	3.0	42.1	1.0	-50.9	-13.0	-37.9	
High Ch, 846.6MHz									
1693.20	-15.6	V	3.0	40.7	1.0	-55.3	-13.0	-42.3	
2539.80	-12.5	V	3.0	41.4	1.0	-52.9	-13.0	-39.9	
3386.40	-10.0	V	3.0	42.1	1.0	-51.1	-13.0	-38.1	
1693.20	-15.5	H	3.0	40.7	1.0	-55.2	-13.0	-42.2	
2539.80	-12.3	H	3.0	41.4	1.0	-52.7	-13.0	-39.7	
3386.40	-10.0	H	3.0	42.1	1.0	-51.1	-13.0	-38.1	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4789651209							
Date:		2020-10-16							
Test Engineer:		20882							
Configuration:		EUT / AC Adapter, Z-Position							
Location:		Chamber 2							
Mode:		HSDPA Band 5 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.4MHz									
1652.80	-15.7	V	3.0	40.7	1.0	-55.4	-13.0	-42.4	
2479.20	-12.8	V	3.0	41.3	1.0	-53.1	-13.0	-40.1	
3305.60	-10.1	V	3.0	42.1	1.0	-51.2	-13.0	-38.2	
1652.80	-15.7	H	3.0	40.7	1.0	-55.4	-13.0	-42.4	
2479.20	-12.4	H	3.0	41.3	1.0	-52.7	-13.0	-39.7	
3305.60	-10.0	H	3.0	42.1	1.0	-51.1	-13.0	-38.1	
Mid Ch, 836.6MHz									
1673.20	-15.5	V	3.0	40.7	1.0	-55.2	-13.0	-42.2	
2509.80	-12.7	V	3.0	41.4	1.0	-53.0	-13.0	-40.0	
3346.40	-9.8	V	3.0	42.1	1.0	-50.9	-13.0	-37.9	
1673.20	-15.6	H	3.0	40.7	1.0	-55.3	-13.0	-42.3	
2509.80	-12.4	H	3.0	41.4	1.0	-52.8	-13.0	-39.8	
3346.40	-9.8	H	3.0	42.1	1.0	-50.8	-13.0	-37.8	
High Ch, 846.6MHz									
1693.20	-15.6	V	3.0	40.7	1.0	-55.3	-13.0	-42.3	
2539.80	-12.6	V	3.0	41.4	1.0	-52.9	-13.0	-39.9	
3386.40	-10.0	V	3.0	42.1	1.0	-51.0	-13.0	-38.0	
1693.20	-15.5	H	3.0	40.7	1.0	-55.1	-13.0	-42.1	
2539.80	-12.1	H	3.0	41.4	1.0	-52.5	-13.0	-39.5	
3386.40	-10.0	H	3.0	42.1	1.0	-51.1	-13.0	-38.1	

WCDMA Band 4

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4789651209							
Date:		2020-10-16							
Test Engineer:		22943							
Configuration:		EUT / AC Adapter, X-Position							
Location:		Chamber 2							
Mode:		Rel99 Band 4 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1712.4MHz									
3424.80	-9.4	V	3.0	42.1	1.0	-50.4	-13.0	-37.4	
5137.20	-8.7	V	3.0	42.8	1.0	-50.5	-13.0	-37.5	
6849.60	-6.4	V	3.0	42.7	1.0	-48.1	-13.0	-35.1	
3424.80	-9.3	H	3.0	42.1	1.0	-50.4	-13.0	-37.4	
5137.20	-8.4	H	3.0	42.8	1.0	-50.2	-13.0	-37.2	
6849.60	-6.4	H	3.0	42.7	1.0	-48.2	-13.0	-35.2	
Mid Ch, 1732.6MHz									
3465.20	-9.3	V	3.0	42.1	1.0	-50.4	-13.0	-37.4	
5197.80	-8.5	V	3.0	42.8	1.0	-50.3	-13.0	-37.3	
6930.40	-6.3	V	3.0	42.7	1.0	-48.1	-13.0	-35.1	
3465.20	-9.4	H	3.0	42.1	1.0	-50.4	-13.0	-37.4	
5197.80	-8.2	H	3.0	42.8	1.0	-50.0	-13.0	-37.0	
6930.40	-6.4	H	3.0	42.7	1.0	-48.1	-13.0	-35.1	
High Ch, 1752.6MHz									
3505.20	-8.6	V	3.0	42.1	1.0	-49.7	-13.0	-36.7	
5257.80	-8.5	V	3.0	42.8	1.0	-50.3	-13.0	-37.3	
7010.40	-6.0	V	3.0	42.7	1.0	-47.7	-13.0	-34.7	
3505.20	-8.6	H	3.0	42.1	1.0	-49.7	-13.0	-36.7	
5257.80	-8.2	H	3.0	42.8	1.0	-50.0	-13.0	-37.0	
7010.40	-6.1	H	3.0	42.7	1.0	-47.8	-13.0	-34.8	

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4789651209							
Date:		2020-10-16							
Test Engineer:		22943							
Configuration:		EUT / AC Adapter, X-Position							
Location:		Chamber 2							
Mode:		HSDPA Band 4 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1712.4MHz									
3424.80	-9.4	V	3.0	42.1	1.0	-50.4	-13.0	-37.4	
5137.20	-8.6	V	3.0	42.8	1.0	-50.5	-13.0	-37.5	
6849.60	-6.4	V	3.0	42.7	1.0	-48.2	-13.0	-35.2	
3424.80	-9.3	H	3.0	42.1	1.0	-50.4	-13.0	-37.4	
5137.20	-8.4	H	3.0	42.8	1.0	-50.2	-13.0	-37.2	
6849.60	-6.5	H	3.0	42.7	1.0	-48.2	-13.0	-35.2	
Mid Ch, 1732.6MHz									
3465.20	-9.5	V	3.0	42.1	1.0	-50.5	-13.0	-37.5	
5197.80	-8.6	V	3.0	42.8	1.0	-50.4	-13.0	-37.4	
6930.40	-6.3	V	3.0	42.7	1.0	-48.1	-13.0	-35.1	
3465.20	-9.3	H	3.0	42.1	1.0	-50.4	-13.0	-37.4	
5197.80	-8.3	H	3.0	42.8	1.0	-50.1	-13.0	-37.1	
6930.40	-6.3	H	3.0	42.7	1.0	-48.1	-13.0	-35.1	
High Ch, 1752.6MHz									
3505.20	-8.6	V	3.0	42.1	1.0	-49.7	-13.0	-36.7	
5257.80	-8.3	V	3.0	42.8	1.0	-50.2	-13.0	-37.2	
7010.40	-6.0	V	3.0	42.7	1.0	-47.7	-13.0	-34.7	
3505.20	-8.6	H	3.0	42.1	1.0	-49.7	-13.0	-36.7	
5257.80	-8.2	H	3.0	42.8	1.0	-50.1	-13.0	-37.1	
7010.40	-6.2	H	3.0	42.7	1.0	-47.9	-13.0	-34.9	

WCDMA Band 2

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
		Company:	Samsung							
		Project #:	4789651209							
		Date:	2020-10-16							
		Test Engineer:	20882							
		Configuration:	EUT / AC Adapter, Y-Position							
		Location:	Chamber 2							
		Mode:	Rel99 Band 2 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1852.4MHz										
3704.80	-11.5	V	3.0	42.1	1.0	-52.6	-13.0	-39.6		
5557.20	-7.8	V	3.0	42.9	1.0	-49.7	-13.0	-36.7		
7409.60	-6.1	V	3.0	42.5	1.0	-47.6	-13.0	-34.6		
3704.80	-11.6	H	3.0	42.1	1.0	-52.7	-13.0	-39.7		
5557.20	-6.5	H	3.0	42.9	1.0	-48.4	-13.0	-35.4		
7409.60	-6.3	H	3.0	42.5	1.0	-47.8	-13.0	-34.8		
Mid Ch, 1880MHz										
3760.00	-11.3	V	3.0	42.1	1.0	-52.4	-13.0	-39.4		
5640.00	-6.9	V	3.0	42.9	1.0	-48.8	-13.0	-35.8		
7520.00	-6.3	V	3.0	42.4	1.0	-47.7	-13.0	-34.7		
3760.00	-11.4	H	3.0	42.1	1.0	-52.4	-13.0	-39.4		
5640.00	-5.1	H	3.0	42.9	1.0	-47.0	-13.0	-34.0		
7520.00	-6.4	H	3.0	42.4	1.0	-47.9	-13.0	-34.9		
High Ch, 1907.6MHz										
3815.20	-11.5	V	3.0	42.1	1.0	-52.5	-13.0	-39.5		
5722.80	-7.6	V	3.0	42.9	1.0	-49.6	-13.0	-36.6		
7630.40	-6.3	V	3.0	42.4	1.0	-47.7	-13.0	-34.7		
3815.20	-11.3	H	3.0	42.1	1.0	-52.4	-13.0	-39.4		
5722.80	-6.6	H	3.0	42.9	1.0	-48.6	-13.0	-35.6		
7630.40	-6.4	H	3.0	42.4	1.0	-47.8	-13.0	-34.8		

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
		Company:	Samsung							
		Project #:	4789651209							
		Date:	2020-10-16							
		Test Engineer:	20882							
		Configuration:	EUT / AC Adapter, Y-Position							
		Location:	Chamber 2							
		Mode:	HSDPA Band 2 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1852.4MHz										
3704.80	-11.6	V	3.0	42.1	1.0	-52.7	-13.0	-39.7		
5557.20	-7.8	V	3.0	42.9	1.0	-49.7	-13.0	-36.7		
7409.60	-6.1	V	3.0	42.5	1.0	-47.6	-13.0	-34.6		
3704.80	-11.6	H	3.0	42.1	1.0	-52.7	-13.0	-39.7		
5557.20	-6.4	H	3.0	42.9	1.0	-48.3	-13.0	-35.3		
7409.60	-6.3	H	3.0	42.5	1.0	-47.8	-13.0	-34.8		
Mid Ch, 1880MHz										
3760.00	-11.4	V	3.0	42.1	1.0	-52.5	-13.0	-39.5		
5640.00	-7.5	V	3.0	42.9	1.0	-49.5	-13.0	-36.5		
7520.00	-6.4	V	3.0	42.4	1.0	-47.8	-13.0	-34.8		
3760.00	-11.4	H	3.0	42.1	1.0	-52.5	-13.0	-39.5		
5640.00	-6.4	H	3.0	42.9	1.0	-48.3	-13.0	-35.3		
7520.00	-6.5	H	3.0	42.4	1.0	-47.9	-13.0	-34.9		
High Ch, 1907.6MHz										
3815.20	-11.4	V	3.0	42.1	1.0	-52.5	-13.0	-39.5		
5722.80	-7.7	V	3.0	42.9	1.0	-49.6	-13.0	-36.6		
7630.40	-6.2	V	3.0	42.4	1.0	-47.6	-13.0	-34.6		
3815.20	-11.4	H	3.0	42.1	1.0	-52.5	-13.0	-39.5		
5722.80	-6.6	H	3.0	42.9	1.0	-48.6	-13.0	-35.6		
7630.40	-6.4	H	3.0	42.4	1.0	-47.8	-13.0	-34.8		

LTE Band 12

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
		Company:	Samsung							
		Project #:	4789651209							
		Date:	2020-10-19							
		Test Engineer:	20881							
		Configuration:	EUT / AC Adapter, Z-Position							
		Location:	Chamber 2							
		Mode:	LTE_QPSK Band 12 Harmonics, 3MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 700.5MHz										
1401.00	-16.9	V	3.0	40.7	1.0	-56.6	-13.0	-43.6		
2101.50	-14.1	V	3.0	40.8	1.0	-53.9	-13.0	-40.9		
2802.00	-11.4	V	3.0	41.8	1.0	-52.1	-13.0	-39.1		
3MHz										
1401.00	-17.1	H	3.0	40.7	1.0	-56.9	-13.0	-43.9		
2101.50	-13.8	H	3.0	40.8	1.0	-53.6	-13.0	-40.6		
2802.00	-11.3	H	3.0	41.8	1.0	-52.1	-13.0	-39.1		
QPSK										
Mid Ch, 707.5MHz										
1415.00	-16.8	V	3.0	40.7	1.0	-56.6	-13.0	-43.6		
2122.50	-13.5	V	3.0	40.8	1.0	-53.3	-13.0	-40.3		
2830.00	-11.5	V	3.0	41.8	1.0	-52.3	-13.0	-39.3		
1415.00	-17.1	H	3.0	40.7	1.0	-56.9	-13.0	-43.9		
2122.50	-13.1	H	3.0	40.8	1.0	-52.9	-13.0	-39.9		
2830.00	-11.1	H	3.0	41.8	1.0	-51.9	-13.0	-38.9		
High Ch, 714.5MHz										
1429.00	-16.8	V	3.0	40.7	1.0	-56.5	-13.0	-43.5		
2143.50	-14.0	V	3.0	40.8	1.0	-53.8	-13.0	-40.8		
2858.00	-11.2	V	3.0	41.8	1.0	-52.0	-13.0	-39.0		
1429.00	-17.0	H	3.0	40.7	1.0	-56.8	-13.0	-43.8		
2143.50	-13.6	H	3.0	40.8	1.0	-53.4	-13.0	-40.4		
2858.00	-11.0	H	3.0	41.8	1.0	-51.8	-13.0	-38.8		

LTE Band 13

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4789651209							
Date:		2020-10-19							
Test Engineer:		20882							
Configuration:		EUT / AC Adapter, X-Position							
Location:		Chamber 1							
Mode:		LTE_QPSK Band 13 Harmonics, 5MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 779.5MHz									
1559.00	-22.5	V	3.0	45.3	1.0	-66.8	-40.0	-26.8	
2338.50	-11.0	V	3.0	45.1	1.0	-55.0	-13.0	-42.0	
3118.00	-9.7	V	3.0	45.3	1.0	-54.0	-13.0	-41.0	
5MHz									
1559.00	-25.0	H	3.0	45.3	1.0	-69.3	-40.0	-29.3	
2338.50	-12.2	H	3.0	45.1	1.0	-56.2	-13.0	-43.2	
3118.00	-9.8	H	3.0	45.3	1.0	-54.0	-13.0	-41.0	
QPSK									
Mid Ch, 782MHz									
1564.00	-19.4	V	3.0	45.3	1.0	-63.7	-40.0	-23.7	
2346.00	-11.1	V	3.0	45.1	1.0	-55.2	-13.0	-42.2	
3128.00	-9.7	V	3.0	45.3	1.0	-53.9	-13.0	-40.9	
1564.00	-16.7	H	3.0	45.3	1.0	-61.1	-40.0	-21.1	
2346.00	-11.9	H	3.0	45.1	1.0	-56.0	-13.0	-43.0	
3128.00	-9.4	H	3.0	45.3	1.0	-53.7	-13.0	-40.7	
High Ch, 784.5MHz									
1569.00	-22.5	V	3.0	45.3	1.0	-66.8	-40.0	-26.8	
2353.50	-10.9	V	3.0	45.1	1.0	-55.0	-13.0	-42.0	
3138.00	-9.7	V	3.0	45.3	1.0	-53.9	-13.0	-40.9	
1569.00	-22.0	H	3.0	45.3	1.0	-66.3	-40.0	-26.3	
2353.50	-11.8	H	3.0	45.1	1.0	-55.9	-13.0	-42.9	
3138.00	-9.4	H	3.0	45.3	1.0	-53.7	-13.0	-40.7	

Note : No narrowband emissions so only applied the -70dBW/MHz (-40dBm/MHz) wideband emission limit for the 1559-1610 MHz band

LTE Band 25

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4789651209							
Date:		2020-10-20							
Test Engineer:		20896							
Configuration:		EUT / AC Adapter, Z-Position							
Location:		Chamber 2							
Mode:		LTE_QPSK Band 25 Harmonics, 20MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1860MHz									
3720.00	-11.6	V	3.0	42.1	1.0	-52.7	-13.0	-39.7	
5580.00	-8.1	V	3.0	42.9	1.0	-50.0	-13.0	-37.0	
7440.00	-6.3	V	3.0	42.5	1.0	-47.8	-13.0	-34.8	
20MHz									
3720.00	-11.6	H	3.0	42.1	1.0	-52.7	-13.0	-39.7	
5580.00	-7.8	H	3.0	42.9	1.0	-49.7	-13.0	-36.7	
7440.00	-5.7	H	3.0	42.5	1.0	-47.1	-13.0	-34.1	
QPSK									
Mid Ch, 1882.5MHz									
3765.00	-11.5	V	3.0	42.1	1.0	-52.5	-13.0	-39.5	
5647.50	-7.9	V	3.0	42.9	1.0	-49.8	-13.0	-36.8	
7530.00	-6.2	V	3.0	42.4	1.0	-47.6	-13.0	-34.6	
3765.00	-11.3	H	3.0	42.1	1.0	-52.4	-13.0	-39.4	
5647.50	-7.7	H	3.0	42.9	1.0	-49.6	-13.0	-36.6	
7530.00	-6.4	H	3.0	42.4	1.0	-47.9	-13.0	-34.9	
High Ch, 1905MHz									
3810.00	-11.4	V	3.0	42.1	1.0	-52.5	-13.0	-39.5	
5715.00	-7.9	V	3.0	42.9	1.0	-49.9	-13.0	-36.9	
7620.00	-6.2	V	3.0	42.4	1.0	-47.6	-13.0	-34.6	
3810.00	-11.4	H	3.0	42.1	1.0	-52.5	-13.0	-39.5	
5715.00	-7.8	H	3.0	42.9	1.0	-49.7	-13.0	-36.7	
7620.00	-6.3	H	3.0	42.4	1.0	-47.7	-13.0	-34.7	

LTE Band 26 (Part 90)

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		4789651209								
Date:		2020-10-19								
Test Engineer:		20882								
Configuration:		EUT / AC Adapter, Z-Position								
Location:		Chamber 1								
Mode:		LTE_QPSK Band 26 Harmonics, 3MHz Bandwidth								
LTE Band 26 3MHz QPSK	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 815.5MHz									
	1631.00	-13.5	V	3.0	45.3	1.0	-57.8	-13.0	-44.8	
	2446.50	-11.0	V	3.0	45.1	1.0	-55.1	-13.0	-42.1	
	3262.00	-9.8	V	3.0	45.3	1.0	-54.1	-13.0	-41.1	
	1631.00	-15.2	H	3.0	45.3	1.0	-59.4	-13.0	-46.4	
	2446.50	-11.6	H	3.0	45.1	1.0	-55.7	-13.0	-42.7	
	3262.00	-9.5	H	3.0	45.3	1.0	-53.8	-13.0	-40.8	
	Mid Ch, 822.5MHz									
	1645.00	-13.4	V	3.0	45.3	1.0	-57.7	-13.0	-44.7	
	2467.50	-10.7	V	3.0	45.1	1.0	-54.8	-13.0	-41.8	
	3290.00	-9.6	V	3.0	45.3	1.0	-54.0	-13.0	-41.0	
	1645.00	-15.0	H	3.0	45.3	1.0	-59.3	-13.0	-46.3	
	2467.50	-11.7	H	3.0	45.1	1.0	-55.7	-13.0	-42.7	
	3290.00	-9.7	H	3.0	45.3	1.0	-54.1	-13.0	-41.1	

LTE Band 26 (Part 22)

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		4789651209								
Date:		2020-10-19								
Test Engineer:		20882								
Configuration:		EUT / AC Adapter, Z-Position								
Location:		Chamber 1								
Mode:		LTE_QPSK Band 26 Harmonics, 3MHz Bandwidth								
LTE Band 26 3MHz QPSK	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 825.5MHz									
	1651.00	-13.6	V	3.0	45.3	1.0	-57.9	-13.0	-44.9	
	2476.50	-11.0	V	3.0	45.1	1.0	-55.1	-13.0	-42.1	
	3302.00	-10.0	V	3.0	45.3	1.0	-54.3	-13.0	-41.3	
	1651.00	-15.2	H	3.0	45.3	1.0	-59.5	-13.0	-46.5	
	2476.50	-11.5	H	3.0	45.1	1.0	-55.6	-13.0	-42.6	
	3302.00	-9.8	H	3.0	45.3	1.0	-54.1	-13.0	-41.1	
	Mid Ch, 831.5MHz									
	1663.00	-13.3	V	3.0	45.3	1.0	-57.6	-13.0	-44.6	
	2494.50	-11.0	V	3.0	45.1	1.0	-55.1	-13.0	-42.1	
	3326.00	-9.7	V	3.0	45.3	1.0	-54.0	-13.0	-41.0	
	1663.00	-14.9	H	3.0	45.3	1.0	-59.1	-13.0	-46.1	
	2494.50	-11.5	H	3.0	45.1	1.0	-55.6	-13.0	-42.6	
	3326.00	-9.3	H	3.0	45.3	1.0	-53.6	-13.0	-40.6	
	High Ch, 847.5MHz									
	1695.00	-13.1	V	3.0	45.2	1.0	-57.4	-13.0	-44.4	
	2542.50	-11.1	V	3.0	45.1	1.0	-55.2	-13.0	-42.2	
	3390.00	-9.4	V	3.0	45.3	1.0	-53.8	-13.0	-40.8	
	1695.00	-15.0	H	3.0	45.2	1.0	-59.2	-13.0	-46.2	
2542.50	-11.6	H	3.0	45.1	1.0	-55.7	-13.0	-42.7		
3390.00	-9.1	H	3.0	45.3	1.0	-53.5	-13.0	-40.5		

LTE Band 41 (PC2)

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4789651209							
Date:		2020-11-10							
Test Engineer:		20882							
Configuration:		EUT / AC Adapter , Z-Position							
Location:		Chamber 2							
Mode:		LTE_QPSK Band 41 Harmonics, 20MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2506MHz									
5012.00	-6.0	V	3.0	42.8	1.0	-47.8	-25.0	-22.8	
7518.00	7.1	V	3.0	42.4	1.0	-34.3	-25.0	-9.3	
10024.00	-7.4	V	3.0	40.9	1.0	-47.3	-25.0	-22.3	
12530.00	-6.1	V	3.0	42.1	1.0	-47.1	-25.0	-22.1	
15036.00	-5.8	V	3.0	43.7	1.0	-48.5	-25.0	-23.5	
5012.00	-5.5	H	3.0	42.8	1.0	-47.3	-25.0	-22.3	
7518.00	5.7	H	3.0	42.4	1.0	-35.8	-25.0	-10.8	
10024.00	-4.7	H	3.0	40.9	1.0	-44.6	-25.0	-19.6	
12530.00	-7.0	H	3.0	42.1	1.0	-48.1	-25.0	-23.1	
15036.00	-5.9	H	3.0	43.7	1.0	-48.6	-25.0	-23.6	
Mid Ch, 2593MHz									
5186.00	-10.1	V	3.0	42.8	1.0	-51.9	-25.0	-26.9	
7779.00	2.6	V	3.0	42.3	1.0	-38.7	-25.0	-13.7	
10372.00	-9.6	V	3.0	41.0	1.0	-49.7	-25.0	-24.7	
12965.00	-8.2	V	3.0	42.4	1.0	-49.5	-25.0	-24.5	
15558.00	-5.9	V	3.0	43.5	1.0	-48.4	-25.0	-23.4	
5186.00	-2.3	H	3.0	42.8	1.0	-44.1	-25.0	-19.1	
7779.00	0.8	H	3.0	42.3	1.0	-40.5	-25.0	-15.5	
10372.00	-8.2	H	3.0	41.0	1.0	-48.2	-25.0	-23.2	
12965.00	-7.9	H	3.0	42.4	1.0	-49.2	-25.0	-24.2	
15558.00	-5.5	H	3.0	43.5	1.0	-48.0	-25.0	-23.0	
High Ch, 2680MHz									
5360.00	-4.9	V	3.0	42.9	1.0	-46.8	-25.0	-21.8	
8040.00	5.4	V	3.0	42.2	1.0	-35.8	-25.0	-10.8	
10720.00	-9.3	V	3.0	41.2	1.0	-49.5	-25.0	-24.5	
13400.00	-5.8	V	3.0	42.6	1.0	-47.5	-25.0	-22.5	
16080.00	-4.8	V	3.0	43.4	1.0	-47.2	-25.0	-22.2	
5360.00	-6.2	H	3.0	42.9	1.0	-48.1	-25.0	-23.1	
8040.00	-1.0	H	3.0	42.2	1.0	-42.2	-25.0	-17.2	
10720.00	-9.1	H	3.0	41.2	1.0	-49.3	-25.0	-24.3	
13400.00	-4.8	H	3.0	42.6	1.0	-46.5	-25.0	-21.5	
16080.00	-4.7	H	3.0	43.4	1.0	-47.1	-25.0	-22.1	

LTE Band 66

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		4789651209								
Date:		2020-11-03								
Test Engineer:		22943								
Configuration:		EUT / AC Adapter, Z-Position								
Location:		Chamber 2								
Mode:		LTE_QPSK Band 66 Harmonics, 1.4MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1710.7MHz										
3421.40	-8.7	V	3.0	42.1	1.0	-49.7	-13.0	-36.7		
5132.10	-8.6	V	3.0	42.8	1.0	-50.4	-13.0	-37.4		
6842.80	-5.9	V	3.0	42.7	1.0	-47.7	-13.0	-34.7		
1.4MHz										
3421.40	-8.7	H	3.0	42.1	1.0	-49.8	-13.0	-36.8		
5132.10	-7.9	H	3.0	42.8	1.0	-49.8	-13.0	-36.8		
6842.80	-6.1	H	3.0	42.7	1.0	-47.8	-13.0	-34.8		
QPSK										
Mid Ch, 1745MHz										
3490.00	-8.6	V	3.0	42.1	1.0	-49.6	-13.0	-36.6		
5235.00	-8.1	V	3.0	42.8	1.0	-50.0	-13.0	-37.0		
6980.00	-5.7	V	3.0	42.7	1.0	-47.4	-13.0	-34.4		
3490.00	-8.6	H	3.0	42.1	1.0	-49.7	-13.0	-36.7		
5235.00	-8.3	H	3.0	42.8	1.0	-50.1	-13.0	-37.1		
6980.00	-6.0	H	3.0	42.7	1.0	-47.7	-13.0	-34.7		
High Ch, 1779.3MHz										
3558.60	-7.4	V	3.0	42.1	1.0	-48.5	-13.0	-35.5		
5337.90	-8.1	V	3.0	42.9	1.0	-50.0	-13.0	-37.0		
7117.20	-5.7	V	3.0	42.6	1.0	-47.4	-13.0	-34.4		
3558.60	-7.3	H	3.0	42.1	1.0	-48.4	-13.0	-35.4		
5337.90	-7.5	H	3.0	42.9	1.0	-49.4	-13.0	-36.4		
7117.20	-5.6	H	3.0	42.6	1.0	-47.2	-13.0	-34.2		

LTE Band 2

LTE Band 2(Frequency range: 1850-1910 MHz) is covered by LTE Band 25 (Frequency range: 1850-1915 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 4

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 5

LTE Band 5 (Frequency range: 824-849 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 17

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band41(PC3)

LTE Band 41(PC3, Frequency range : 2496-2690 MHz) is covered by LTE Band 41(PC2) (Frequency range: 2496-2690 MHz) due to same frequency range, same channel bandwidth and maximum tune-up limit is higher than LTE Band41(PC3).

NR Band n5

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4789651209							
Date:		2020-11-10							
Test Engineer:		20881							
Configuration:		EUT / AC Adapter, Z-Position							
Location:		Chamber 1							
Mode:		LTE_QPSK NR n5 Harmonics, 5MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.5MHz									
1653.00	-13.6	V	3.0	45.3	1.0	-57.9	-13.0	-44.9	
2479.50	-11.1	V	3.0	45.1	1.0	-55.2	-13.0	-42.2	
3306.00	-10.1	V	3.0	45.3	1.0	-54.4	-13.0	-41.4	
1653.00	-15.0	H	3.0	45.3	1.0	-59.2	-13.0	-46.2	
2479.50	-11.8	H	3.0	45.1	1.0	-55.9	-13.0	-42.9	
3306.00	-9.6	H	3.0	45.3	1.0	-54.0	-13.0	-41.0	
Mid Ch, 836.5MHz									
1673.00	-13.2	V	3.0	45.3	1.0	-57.5	-13.0	-44.5	
2509.50	-11.0	V	3.0	45.1	1.0	-55.1	-13.0	-42.1	
3346.00	-9.3	V	3.0	45.3	1.0	-53.7	-13.0	-40.7	
1673.00	-14.9	H	3.0	45.3	1.0	-59.1	-13.0	-46.1	
2509.50	-11.8	H	3.0	45.1	1.0	-55.9	-13.0	-42.9	
3346.00	-9.1	H	3.0	45.3	1.0	-53.4	-13.0	-40.4	
High Ch, 846.5MHz									
1693.00	-13.4	V	3.0	45.2	1.0	-57.6	-13.0	-44.6	
2539.50	-10.9	V	3.0	45.1	1.0	-55.0	-13.0	-42.0	
3386.00	-9.3	V	3.0	45.3	1.0	-53.6	-13.0	-40.6	
1693.00	-14.9	H	3.0	45.2	1.0	-59.2	-13.0	-46.2	
2539.50	-11.6	H	3.0	45.1	1.0	-55.7	-13.0	-42.7	
3386.00	-9.2	H	3.0	45.3	1.0	-53.6	-13.0	-40.6	

NR Band n66

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4789651209							
Date:		2020-11-11							
Test Engineer:		20881							
Configuration:		EUT / AC Adapter, Y-Position							
Location:		Chamber 1							
Mode:		LTE_QPSK NR n66 Harmonics, 5MHz Bandwidth							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1712.5MHz									
3425.00	-8.6	V	3.0	45.4	1.0	-53.0	-13.0	-40.0	
5137.50	-9.1	V	3.0	45.5	1.0	-53.6	-13.0	-40.6	
6850.00	-6.4	V	3.0	44.5	1.0	-49.9	-13.0	-36.9	
3425.00	-8.1	H	3.0	45.4	1.0	-52.4	-13.0	-39.4	
5137.50	-8.8	H	3.0	45.5	1.0	-53.3	-13.0	-40.3	
6850.00	-6.3	H	3.0	44.5	1.0	-49.9	-13.0	-36.9	
Mid Ch, 1745MHz									
3490.00	-8.0	V	3.0	45.4	1.0	-52.3	-13.0	-39.3	
5235.00	-9.0	V	3.0	45.4	1.0	-53.4	-13.0	-40.4	
6980.00	-6.1	V	3.0	44.4	1.0	-49.5	-13.0	-36.5	
3490.00	-7.7	H	3.0	45.4	1.0	-52.0	-13.0	-39.0	
5235.00	-8.7	H	3.0	45.4	1.0	-53.1	-13.0	-40.1	
6980.00	-5.7	H	3.0	44.4	1.0	-49.1	-13.0	-36.1	
High Ch, 1777.5MHz									
3555.00	-7.6	V	3.0	45.4	1.0	-52.0	-13.0	-39.0	
5332.50	-8.6	V	3.0	45.4	1.0	-53.1	-13.0	-40.1	
7110.00	-6.0	V	3.0	44.4	1.0	-49.3	-13.0	-36.3	
3555.00	-7.4	H	3.0	45.4	1.0	-51.8	-13.0	-38.8	
5332.50	-8.4	H	3.0	45.4	1.0	-52.8	-13.0	-39.8	
7110.00	-5.6	H	3.0	44.4	1.0	-48.9	-13.0	-35.9	

END OF TEST REPORT