

FCC Sub6 REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

November 02, 2020

Address:

 129, Samsung-ro, Yeongtong-gu,
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:

 HCT CO., LTD.,
 74, Seoicheon-ro 578beon-gil, Majang-myeon,
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2011-FC002

FCC ID: A3LSMG991U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-G991U
 Additional Model(s): SM-G991U1
 EUT Type: Mobile Phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §22, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
Sub6 n5 (5)	826.5 – 846.5	4M51G7D	PI/2 BPSK	0.077	18.84
		4M51G7D	QPSK	0.075	18.74
		4M51W7D	16QAM	0.062	17.92
		4M50W7D	64QAM	0.036	15.62
		4M50W7D	256QAM	0.027	14.36
Sub6 n5 (10)	829.0 – 844.0	8M97G7D	PI/2 BPSK	0.072	18.56
		8M99G7D	QPSK	0.069	18.38
		9M00W7D	16QAM	0.055	17.40
		8M99W7D	64QAM	0.035	15.40
		8M98W7D	256QAM	0.024	13.75
Sub6 n5 (15)	831.5 – 841.5	13M5G7D	PI/2 BPSK	0.074	18.67
		13M5G7D	QPSK	0.071	18.50
		13M5W7D	16QAM	0.054	17.31
		13M5W7D	64QAM	0.035	15.47
		13M5W7D	256QAM	0.026	14.12
Sub6 n5 (20)	834.0 – 839.0	17M9G7D	PI/2 BPSK	0.066	18.17
		18M0G7D	QPSK	0.059	17.69
		17M9W7D	16QAM	0.052	17.17
		17M9W7D	64QAM	0.034	15.31
		17M9W7D	256QAM	0.024	13.86

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2011-FC002

REVIEWED BY



Report prepared by : Se Wook Park
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2011-FC002	November 02, 2020	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	15
3.9 WORST CASE(RADIATED TEST)	16
3.10 WORST CASE(CONDUCTED TEST)	17
4. LIST OF TEST EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
7. SAMPLE CALCULATION	21
8. TEST DATA	23
8.1 EFFECTIVE RADIATED POWER.....	23
8.2 RADIATED SPURIOUS EMISSIONS	27
8.3 PEAK-TO-AVERAGE RATIO.....	31
8.4 OCCUPIED BANDWIDTH	32
8.5 CONDUCTED SPURIOUS EMISSIONS	33
8.6 BAND EDGE	33
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	34
9. TEST PLOTS.....	38
10. ANNEX A_ TEST SETUP PHOTO.....	115

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG991U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§22, §2
EUT Type:	Mobile Phone
Model(s):	SM-G991U
Additional Model(s):	SM-G991U1
SCS(kHz):	15
Bandwidth(MHz):	5, 10, 15, 20
Waveform:	CP-OFDM, DFT-S-OFDM
Modulation:	DFT-S-OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
Tx Frequency:	826.5 MHz – 846.5 MHz (Sub6 n5(5 MHz)) 829.0 MHz – 844.0 MHz (Sub6 n5(10 MHz)) 831.5 MHz – 841.5 MHz (Sub6 n5(15 MHz)) 834.0 MHz – 839.0 MHz (Sub6 n5(20 MHz))
Date(s) of Tests:	September 30, 2020 ~ November 02, 2020

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS, CDMA(BC0, 1, 10) and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (HT20/40/80), Bluetooth, BT LE, NFC, WPT, mmWave(n260/261).

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

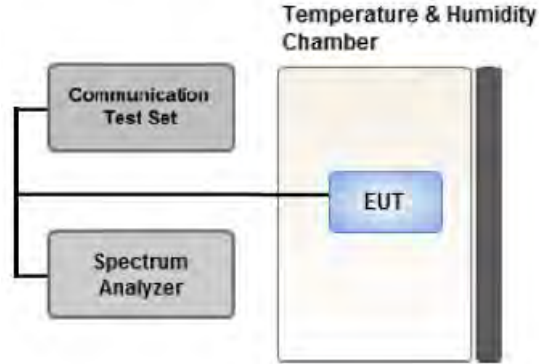

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25%.

3.5 OCCUPIED BANDWIDTH.



Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL



Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

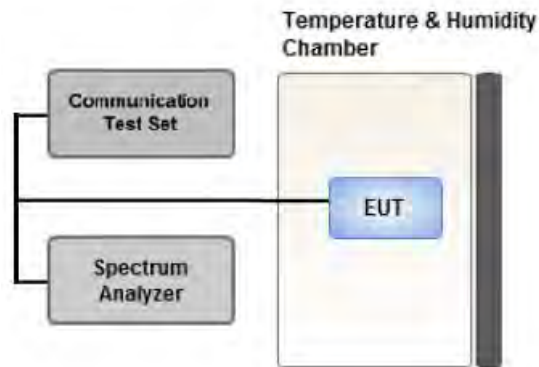

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE



Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.

- All modes of operation were investigated and the worst case configuration results are reported.

- Radiated Spurious emissions are measured while operating in EN-DC mode with Sub 6 NR carrier as well as an LTE carrier (anchor).

All EN-DC mode of operation were investigated and the worst case configuration results are reported.

(Worst case: 2A-n5A)

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

- SM-G991U & additional models were tested and the worst case results are reported.

(Worst case : SM-G991U)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1	1	Z
Radiated Spurious Emissions	PI/2 BPSK	1	1	X

3.10 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.
(Worst case: DFT-S-OFDM)
- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.
(Worst case: PI/2 BPSK)
- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.
Please refer to the table below.
- SM-G991U & additional models were tested and the worst case results are reported.
(Worst case : SM-G991U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth Peak- to- Average Ratio	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Band Edge	PI/2 BPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	51
		15	Low	1	0
			High	1	78
		20	Low	1	0
High	1		105		
		5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	PI/2 BPSK	5, 10, 15, 20	Low, Mid, High	1	1

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/27/2020	Annual	04/27/2021
Hewlett Packard	E3632A/DC Power Supply	MY40004427	09/16/2020	Annual	09/16/2021
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93008124	03/18/2020	Annual	03/18/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	04/27/2020	Annual	04/27/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2020	Annual	06/04/2021
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	101055	05/13/2020	Annual	05/13/2021
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/26/2020	Annual	08/26/2021
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/26/2019	Biennial	04/26/2021
Schwarzbeck	VULB9160/ Bilog Antenna	3150	03/12/2019	Biennial	03/12/2021
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6262116770	07/22/2020	Annual	07/22/2021
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/22/2020	Annual	01/22/2021
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/13/2020	Annual	07/13/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/04/2020	Annual	06/04/2021
KEYSIGHT	E7515B / 5G Wireless Tester	MY58300756	01/07/2020	Annual	01/07/2021
Mini-Circuits	ZC4PD-K1844+ / 4-Way Divider	942907	09/14/2020	Annual	09/14/2021
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).
- Model : FSV40/Spectrum
- Use date of equipment : September 23, 2020 ~ October 12, 2020, October 14, 2020 ~

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §22.355	< 2.5 ppm	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC
3. Conducted tests were tested using 5G Wireless Tester.

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

Note:

1. Radiated tests were tested using FTM test software.

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

PSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	ERP	
								W	W	dBm
826.5	Sub6 n5/ 5 MHz [15 kHz]	PI/2 BPSK	-29.22	30.21	-10.09	1.28	H	< 7.00	0.077	18.84
		QPSK	-29.80	29.63	-10.09	1.28	H		0.067	18.26
		16-QAM	-30.78	28.65	-10.09	1.28	H		0.053	17.28
		64-QAM	-32.63	26.80	-10.09	1.28	H		0.035	15.43
		256-QAM	-34.36	25.07	-10.09	1.28	H		0.023	13.70
836.5		PI/2 BPSK	-30.25	29.52	-10.07	1.29	H		0.065	18.16
		QPSK	-30.45	29.32	-10.07	1.29	H		0.062	17.96
		16-QAM	-31.17	28.60	-10.07	1.29	H		0.053	17.24
		64-QAM	-32.94	26.83	-10.07	1.29	H		0.035	15.47
		256-QAM	-34.47	25.30	-10.07	1.29	H		0.025	13.94
846.5		PI/2 BPSK	-30.19	29.90	-10.05	1.30	H		0.072	18.55
		QPSK	-30.00	30.09	-10.05	1.30	H		0.075	18.74
		16-QAM	-30.82	29.27	-10.05	1.30	H		0.062	17.92
		64-QAM	-33.12	26.97	-10.05	1.30	H		0.036	15.62
		256-QAM	-34.38	25.71	-10.05	1.30	H		0.027	14.36

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	ERP	
								W	W	dBm
829.0	Sub6 n5/ 10 MHz [15 kHz]	PI/2 BPSK	-29.52	29.92	-10.08	1.28	H	< 7.00	0.072	18.56
		QPSK	-29.72	29.72	-10.08	1.28	H		0.068	18.36
		16-QAM	-30.90	28.54	-10.08	1.28	H		0.052	17.18
		64-QAM	-33.06	26.38	-10.08	1.28	H		0.032	15.02
		256-QAM	-34.58	24.86	-10.08	1.28	H		0.022	13.50
836.5		PI/2 BPSK	-30.58	29.19	-10.07	1.29	H		0.061	17.83
		QPSK	-30.59	29.18	-10.07	1.29	H		0.061	17.82
		16-QAM	-31.01	28.76	-10.07	1.29	H		0.055	17.40
		64-QAM	-33.01	26.76	-10.07	1.29	H		0.035	15.40
		256-QAM	-34.66	25.11	-10.07	1.29	H		0.024	13.75
844.0	PI/2 BPSK	-30.02	29.90	-10.05	1.29	H	0.072	18.56		
	QPSK	-30.20	29.72	-10.05	1.29	H	0.069	18.38		
	16-QAM	-31.42	28.50	-10.05	1.29	H	0.052	17.16		
	64-QAM	-33.41	26.51	-10.05	1.29	H	0.033	15.17		
	256-QAM	-35.07	24.85	-10.05	1.29	H	0.022	13.51		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	ERP	
								W	W	dBm
831.5	Sub6 n5/ 15 MHz [15 kHz]	PI/2 BPSK	-29.53	30.03	-10.08	1.28	H	< 7.00	0.074	18.67
		QPSK	-29.70	29.86	-10.08	1.28	H		0.071	18.50
		16-QAM	-30.98	28.58	-10.08	1.28	H		0.053	17.22
		64-QAM	-32.91	26.65	-10.08	1.28	H		0.034	15.29
		256-QAM	-34.08	25.48	-10.08	1.28	H		0.026	14.12
836.5		PI/2 BPSK	-30.25	29.52	-10.07	1.29	H		0.065	18.16
		QPSK	-30.30	29.47	-10.07	1.29	H		0.065	18.11
		16-QAM	-31.10	28.67	-10.07	1.29	H		0.054	17.31
		64-QAM	-32.94	26.83	-10.07	1.29	H		0.035	15.47
		256-QAM	-35.18	24.59	-10.07	1.29	H		0.021	13.23
841.5	PI/2 BPSK	-30.79	29.18	-10.06	1.29	H	0.061	17.83		
	QPSK	-30.89	29.08	-10.06	1.29	H	0.059	17.73		
	16-QAM	-31.77	28.20	-10.06	1.29	H	0.048	16.85		
	64-QAM	-33.50	26.47	-10.06	1.29	H	0.032	15.12		
	256-QAM	-35.03	24.94	-10.06	1.29	H	0.023	13.59		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	ERP	
								W	W	dBm
834.0	Sub6 n5/ 20 MHz [15 kHz]	PI/2 BPSK	-31.00	28.67	-10.07	1.28	H	< 7.00	0.054	17.32
		QPSK	-31.08	28.59	-10.07	1.28	H		0.053	17.24
		16-QAM	-31.15	28.52	-10.07	1.28	H		0.052	17.17
		64-QAM	-33.01	26.66	-10.07	1.28	H		0.034	15.31
		256-QAM	-34.68	24.99	-10.07	1.28	H		0.023	13.64
836.5		PI/2 BPSK	-30.24	29.53	-10.07	1.29	H		0.066	18.17
		QPSK	-30.72	29.05	-10.07	1.29	H		0.059	17.69
		16-QAM	-31.46	28.31	-10.07	1.29	H		0.050	16.95
		64-QAM	-33.50	26.27	-10.07	1.29	H		0.031	14.91
		256-QAM	-35.02	24.75	-10.07	1.29	H		0.022	13.39
839.0	PI/2 BPSK	-30.58	29.08	-10.06	1.29	H	0.059	17.73		
	QPSK	-30.63	29.03	-10.06	1.29	H	0.059	17.68		
	16-QAM	-31.56	28.10	-10.06	1.29	H	0.047	16.75		
	64-QAM	-33.15	26.51	-10.06	1.29	H	0.033	15.16		
	256-QAM	-34.45	25.21	-10.06	1.29	H	0.024	13.86		

8.2 RADIATED SPURIOUS EMISSIONS

- NR Band: N5
- LTE Band(Anchor): B2
- Bandwidth: 5 MHz
- Modulation: PI/2 BPSK
- Distance: 3 meters
- SCS: 15 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
165300 (826.5)	1 653.00	-56.33	9.40	-67.16	1.84	H	-59.60	-13.00
	2 479.50	-57.06	10.10	-63.64	2.28	H	-55.82	-13.00
	3 306.00	-59.26	11.10	-63.61	2.66	V	-55.16	-13.00
167300 (836.5)	1 673.00	-55.56	9.52	-65.25	1.84	H	-57.57	-13.00
	2 509.50	-58.83	10.28	-65.25	2.30	V	-57.27	-13.00
	3 346.00	-59.39	11.28	-63.98	2.67	V	-55.37	-13.00
169300 (846.5)	1 693.00	-57.63	9.67	-68.16	1.87	H	-60.36	-13.00
	2 539.50	-58.14	10.56	-64.65	2.31	H	-56.40	-13.00
	3 386.00	-59.04	11.30	-63.64	2.68	H	-55.01	-13.00

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
18900 (1888.0)	3,760.00	-59.26	11.64	-62.25	2.85	H	-53.46	-13.00
	5,640.00	-57.89	12.00	-54.67	3.54	V	-46.21	-13.00
	7,520.00	-62.70	11.54	-50.35	4.12	V	-42.93	-13.00

- NR Band: N5
- LTE Band(Anchor): B2
- Bandwidth: 10 MHz
- Modulation: PI/2 BPSK
- Distance: 3 meters
- SCS: 15 kHz

Ch	Freq (MHz)	Measured Level (dBi)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
165800 (829.0)	1 658.00	-55.79	9.46	-65.95	1.84	H	-58.33	-13.00
	2 487.00	-58.89	10.16	-65.56	2.28	V	-57.68	-13.00
	3 316.00	-59.81	11.16	-64.13	2.67	H	-55.63	-13.00
167300 (836.5)	1 673.00	-53.62	9.52	-63.31	1.84	H	-55.63	-13.00
	2 509.50	-59.29	10.28	-65.71	2.30	H	-57.73	-13.00
	3 346.00	-59.49	11.28	-64.08	2.67	H	-55.47	-13.00
168800 (844.0)	1 688.00	-56.72	9.64	-67.52	1.87	H	-59.75	-13.00
	2 532.00	-59.17	10.44	-66.12	2.30	H	-57.98	-13.00
	3 376.00	-59.67	11.30	-64.17	2.69	V	-55.56	-13.00

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
18900 (1880.0)	3,710.00	3,760.00	-59.72	11.64	-62.71	2.85	H	-13.00
	5,565.00	5,640.00	-58.35	12.00	-55.13	3.54	V	-13.00
	7,420.00	7,520.00	-63.05	11.54	-50.70	4.12	V	-13.00

- NR Band: N5
- LTE Band(Anchor): B2
- Bandwidth: 15 MHz
- Modulation: PI/2 BPSK
- Distance: 3 meters
- SCS: 15 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
166300 (831.5)	1 663.00	-57.37	9.46	-67.53	1.84	H	-59.91	-13.00
	2 494.50	-59.07	10.18	-65.89	2.29	H	-58.00	-13.00
	3 326.00	-58.52	11.20	-62.96	2.66	V	-54.42	-13.00
167300 (836.5)	1 673.00	-55.88	9.52	-65.57	1.84	H	-57.89	-13.00
	2 509.50	-58.00	10.28	-64.42	2.30	H	-56.44	-13.00
	3 346.00	-59.29	11.28	-63.88	2.67	V	-55.27	-13.00
168300 (841.5)	1 683.00	-58.06	9.58	-68.36	1.85	V	-60.63	-13.00
	2 524.50	-60.01	10.40	-66.65	2.30	H	-58.55	-13.00
	3 366.00	-60.21	11.30	-64.66	2.70	V	-56.05	-13.00

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
18900 (1880.0)	3,760.00	-59.42	11.64	-62.41	2.85	H	-53.62	-13.00
	5,640.00	-58.12	12.00	-54.90	3.54	V	-46.44	-13.00
	7,520.00	-63.19	11.54	-50.84	4.12	V	-43.42	-13.00

- NR Band: N5
- LTE Band(Anchor): B2
- Bandwidth: 20 MHz
- Modulation: PI/2 BPSK
- Distance: 3 meters
- SCS: 15 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
166800 (834.0)	1 668.00	-57.63	9.52	-67.32	1.84	H	-59.64	-13.00
	2 502.00	-58.51	10.20	-65.48	2.29	V	-57.57	-13.00
	3 336.00	-58.73	11.24	-63.34	2.67	V	-54.77	-13.00
167300 (836.5)	1 673.00	-58.37	9.52	-68.06	1.84	V	-60.38	-13.00
	2 509.50	-59.17	10.28	-65.59	2.30	V	-57.61	-13.00
	3 346.00	-58.70	11.28	-63.29	2.67	H	-54.68	-13.00
167800 (839.0)	1 678.00	-57.56	9.58	-67.86	1.85	H	-60.13	-13.00
	2 517.00	-58.41	10.36	-64.75	2.30	H	-56.69	-13.00
	3 356.00	-59.44	11.30	-63.90	2.68	V	-55.28	-13.00

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
18900 (1880.0)	3,760.00	-59.45	11.64	-62.44	2.85	H	-53.65	-13.00
	5,640.00	-57.93	12.00	-54.71	3.54	V	-46.25	-13.00
	7,520.00	-63.11	11.54	-50.76	4.12	V	-43.34	-13.00

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Sub6 n5	5 MHz	1745.0	BPSK	25	0	4.05
			QPSK			4.39
			16-QAM			5.51
			64-QAM			5.84
			256-QAM			6.52
	10 MHz		BPSK	50		4.32
			QPSK			4.69
			16-QAM			5.67
			64-QAM			6.08
			256-QAM			6.54
	15 MHz		BPSK	75		4.29
			QPSK			4.82
			16-QAM			5.69
			64-QAM			6.05
			256-QAM			6.50
	20 MHz		BPSK	100		4.16
			QPSK			4.97
			16-QAM			5.79
			64-QAM			6.14
			256-QAM			6.56

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 59 ~ 78.
2. Peak- to- Average Ratio is not required. These values are reported for information only.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Sub6 n5	5 MHz	836.5	BPSK	25	0	4.5063
			QPSK			4.5083
			16-QAM			4.5140
			64-QAM			4.4960
			256-QAM			4.4993
	10 MHz		BPSK	50		8.9705
			QPSK			8.9883
			16-QAM			8.9988
			64-QAM			8.9902
			256-QAM			8.9827
	15 MHz		BPSK	75		13.498
			QPSK			13.472
			16-QAM			13.521
			64-QAM			13.458
			256-QAM			13.505
	20 MHz		BPSK	100		17.894
			QPSK			17.957
			16-QAM			17.921
			64-QAM			17.934
			256-QAM			17.890

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 39 ~ 58.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n5	5	826.5	3.8814	30.278	-65.697	-35.419	-13.00
		836.5	3.8435	30.278	-65.598	-35.320	
		846.5	3.8899	30.278	-65.515	-35.237	
	10	829.0	3.8650	30.278	-65.573	-35.295	
		836.5	3.8176	30.278	-65.541	-35.263	
		844.0	3.8360	30.278	-65.789	-35.511	
	15	831.5	3.8405	30.278	-65.249	-34.971	
		836.5	3.9033	30.278	-65.321	-35.043	
		841.5	3.8889	30.278	-65.446	-35.168	
	20	834.0	3.7827	30.278	-65.515	-35.237	
		836.5	3.8331	30.278	-65.735	-35.457	
		839.0	3.7987	30.278	-65.578	-35.300	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 103 ~ 114.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + 4-Way Divider

Frequency Range (GHz)	Factor [dB]
0.03 – 1	29.691
1 – 5	30.278
5 – 10	31.391
10 – 15	31.716
15 – 20	32.553
Above 20(26.5)	33.984

8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 79 ~ 102.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ BandWidth: 5 MHz
- ▣ Voltage(100%): 3.880 VDC
- ▣ Batt. Endpoint: 3.650 VDC
- ▣ Deviation Limit: ± 0.000 25 % or 2.5 ppm

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
836.5	100%	+20(Ref)	836 500 017	0.0	0.000 000	0.000
	100%	-30	836 500 020	3.2	0.000 000	0.004
	100%	-20	836 500 030	13.3	0.000 002	0.016
	100%	-10	836 500 033	16.0	0.000 002	0.019
	100%	0	836 500 022	5.3	0.000 001	0.006
	100%	+10	836 500 033	16.0	0.000 002	0.019
	100%	+30	836 500 032	15.5	0.000 002	0.018
	100%	+40	836 500 029	11.9	0.000 001	0.014
	100%	+50	836 500 031	14.6	0.000 002	0.017
	Batt. Endpoint	+20	836 500 026	9.4	0.000 001	0.011

- ▣ BandWidth: 10 MHz
- ▣ Voltage(100%): 3.880 VDC
- ▣ Batt. Endpoint: 3.650 VDC
- ▣ Deviation Limit: ± 0.000 25 % or 2.5 ppm

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
836.5	100%	+20(Ref)	836 500 017	0.0	0.000 000	0.000
	100%	-30	836 500 031	14.1	0.000 002	0.017
	100%	-20	836 500 022	5.0	0.000 001	0.006
	100%	-10	836 500 024	7.3	0.000 001	0.009
	100%	0	836 500 028	11.0	0.000 001	0.013
	100%	+10	836 500 030	13.9	0.000 002	0.017
	100%	+30	836 500 031	14.5	0.000 002	0.017
	100%	+40	836 500 023	6.4	0.000 001	0.008
	100%	+50	836 500 024	7.0	0.000 001	0.008
	Batt. Endpoint	+20	836 500 032	15.7	0.000 002	0.019

- ▣ BandWidth: 15 MHz
- ▣ Voltage(100%): 3.880 VDC
- ▣ Batt. Endpoint: 3.650 VDC
- ▣ Deviation Limit: ± 0.000 25 % or 2.5 ppm


Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
836.5	100%	+20(Ref)	836 500 006	0.0	0.000 000	0.000
	100%	-30	836 500 019	13.0	0.000 002	0.016
	100%	-20	836 500 022	16.0	0.000 002	0.019
	100%	-10	836 500 015	8.9	0.000 001	0.011
	100%	0	836 500 022	15.7	0.000 002	0.019
	100%	+10	836 500 022	16.2	0.000 002	0.019
	100%	+30	836 500 019	13.5	0.000 002	0.016
	100%	+40	836 500 009	3.0	0.000 000	0.004
	100%	+50	836 500 016	9.6	0.000 001	0.012
	Batt. Endpoint	+20	836 500 010	4.6	0.000 001	0.006

- ▣ BandWidth: 20 MHz
- ▣ Voltage(100%): 3.880 VDC
- ▣ Batt. Endpoint: 3.650 VDC
- ▣ Deviation Limit: ± 0.000 25 % or 2.5 ppm

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
836.5	100%	+20(Ref)	836 500 008	0.0	0.000 000	0.000
	100%	-30	836 500 023	15.1	0.000 002	0.018
	100%	-20	836 500 017	9.8	0.000 001	0.012
	100%	-10	836 500 012	4.9	0.000 001	0.006
	100%	0	836 500 018	10.7	0.000 001	0.013
	100%	+10	836 500 011	3.8	0.000 000	0.005
	100%	+30	836 500 013	5.6	0.000 001	0.007
	100%	+40	836 500 019	11.8	0.000 001	0.014
	100%	+50	836 500 024	16.1	0.000 002	0.019
	Batt. Endpoint	+20	836 500 016	8.7	0.000 001	0.010

9. TEST PLOTS


Sub6 n5. Occupied Bandwidth Plot (5M BW Ch.167300 BPSK_RB6_0)

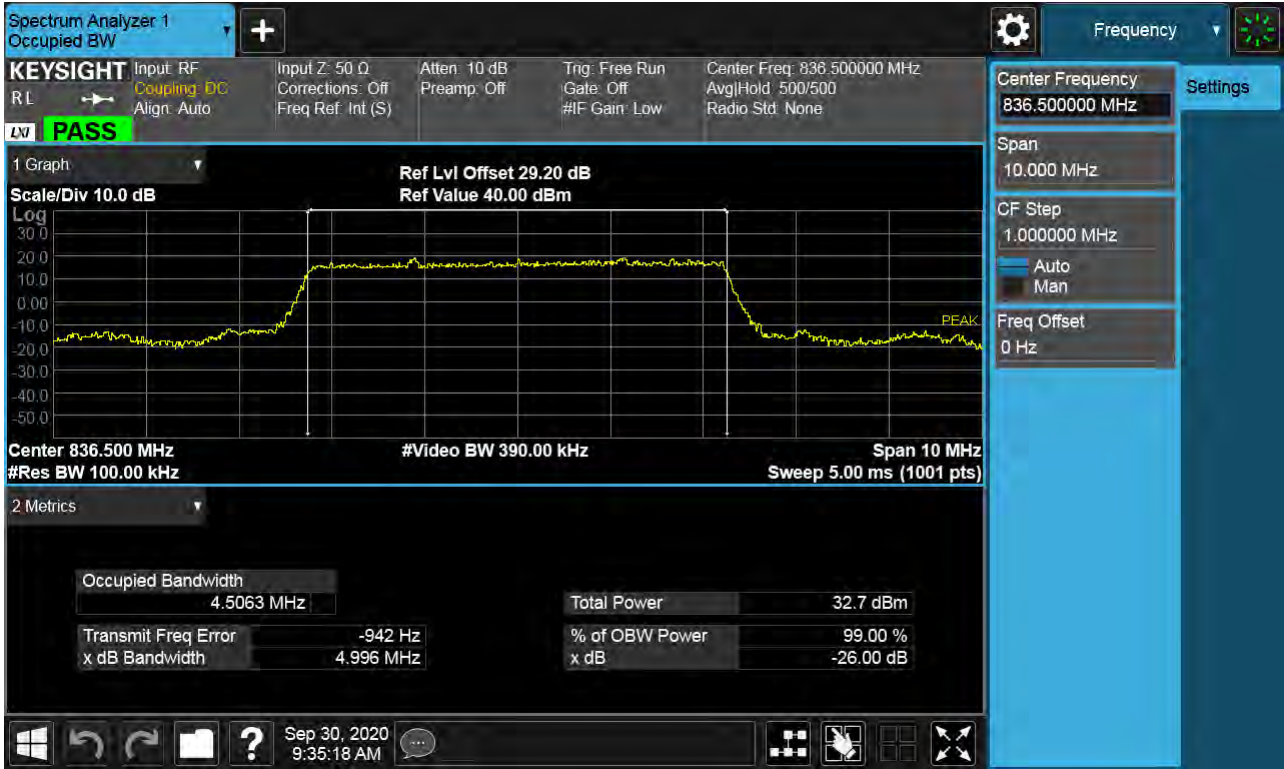


Sub6 n5. Occupied Bandwidth Plot (5M BW Ch.167300 QPSK_RB6_0)



Sub6 n5. Occupied Bandwidth Plot (5M BW Ch.167300 16QAM_RB6_0)

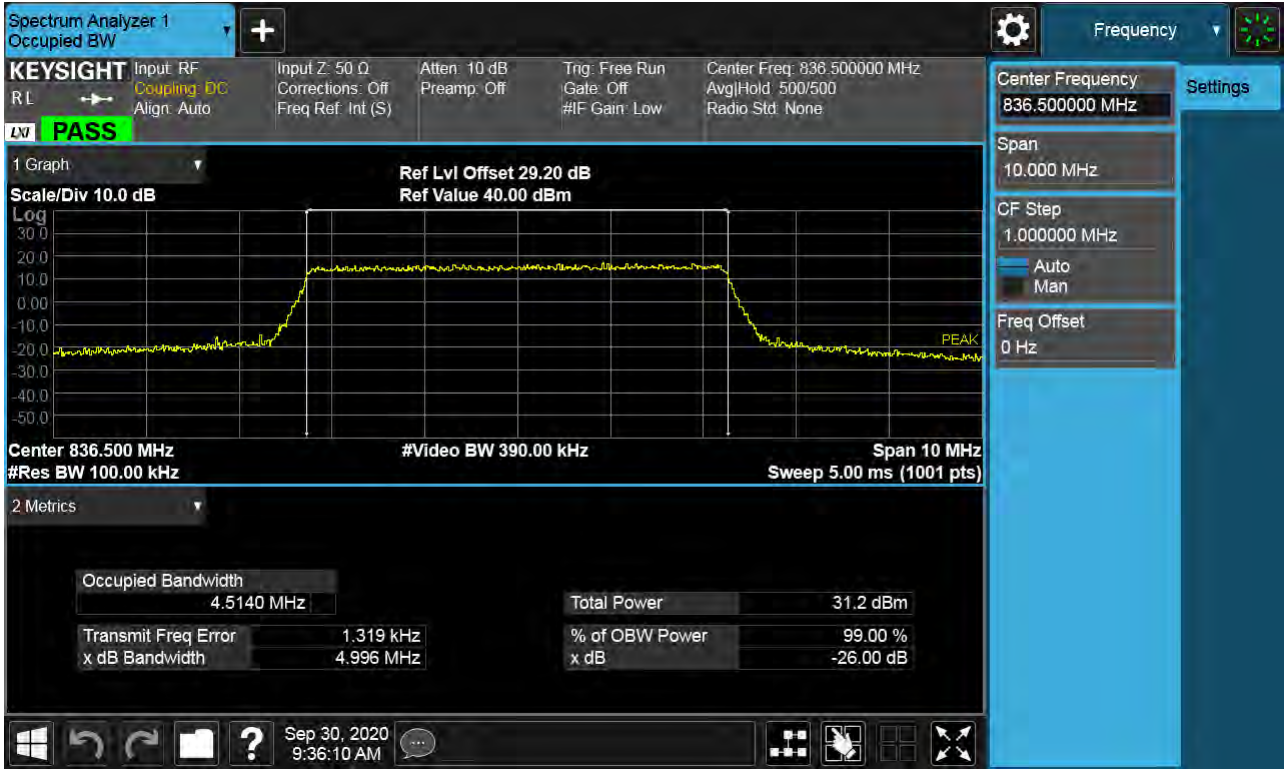


Sub6 n5. Occupied Bandwidth Plot (5M BW Ch.167300 64QAM_RB6_0)

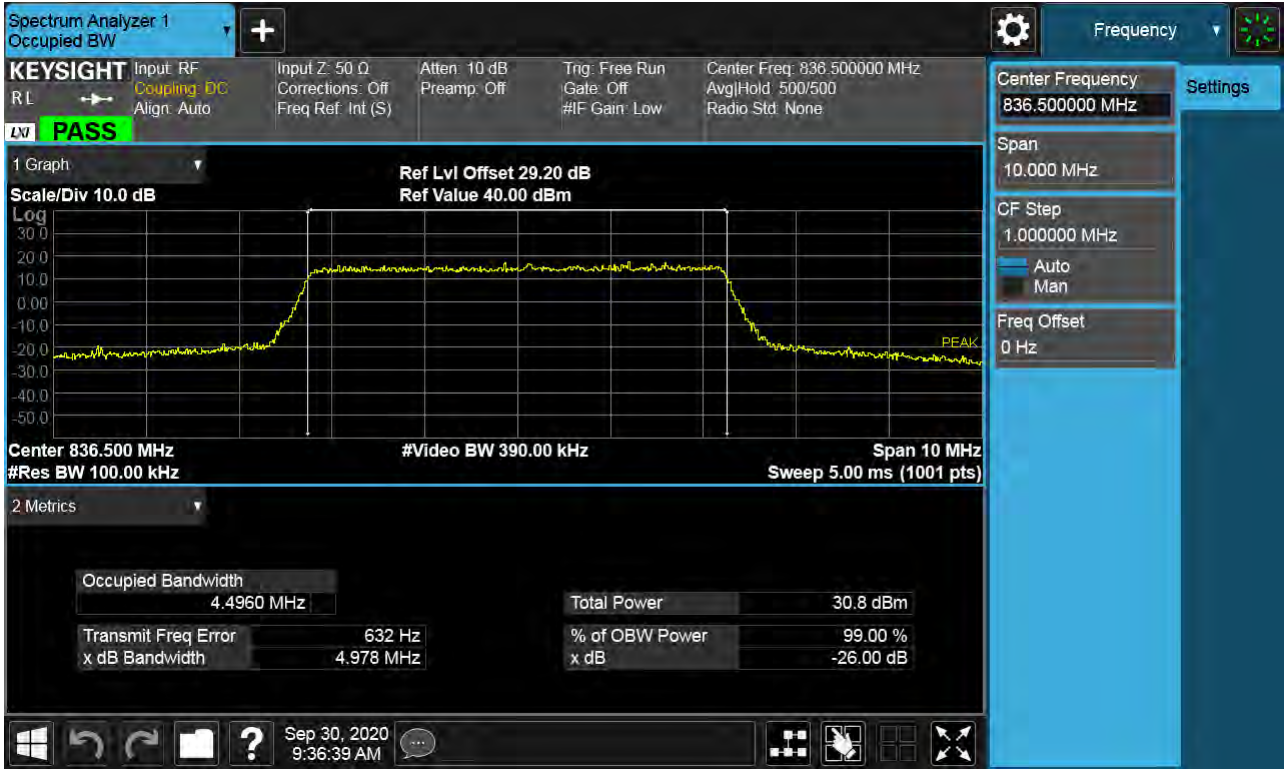


Sub6 n5. Occupied Bandwidth Plot (5M BW Ch.167300 256QAM_RB6_0)




Sub6 n5. Occupied Bandwidth Plot (10M BW Ch.167300 BPSK_RB15_0)

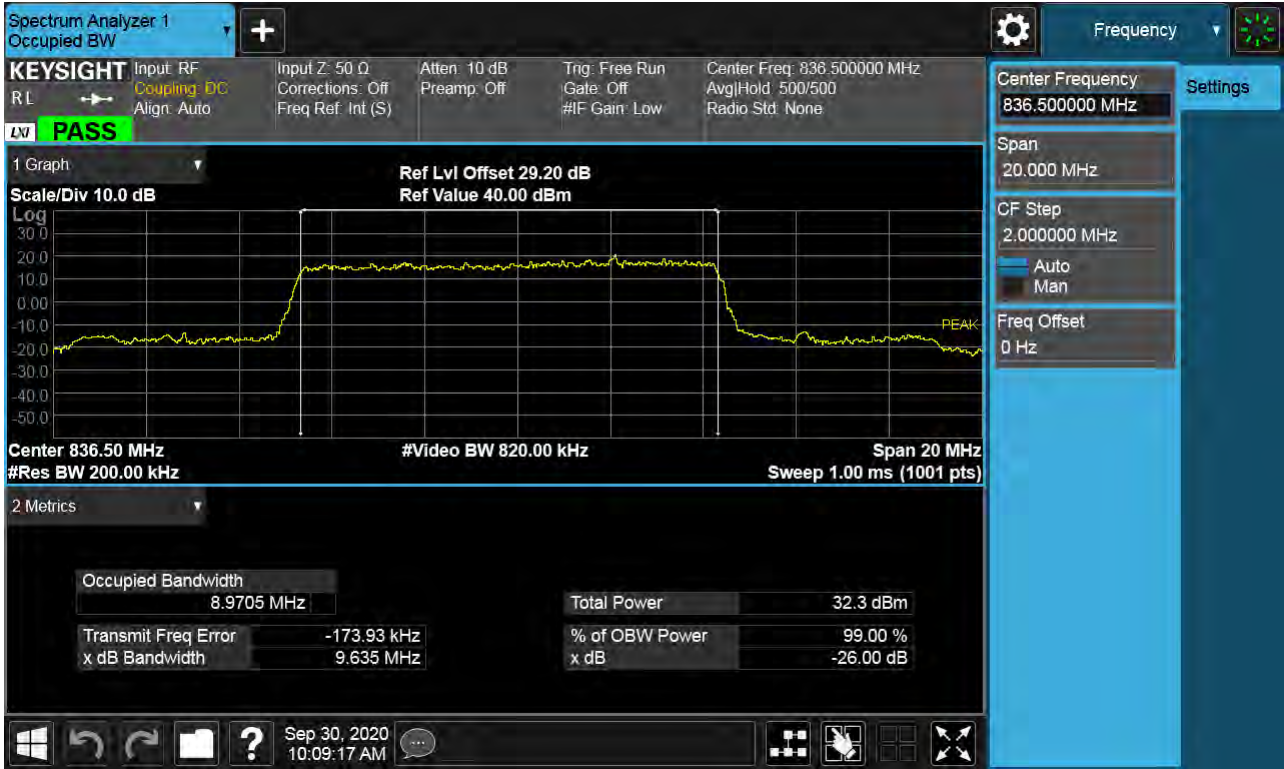


Sub6 n5. Occupied Bandwidth Plot (10M BW Ch.167300 QPSK_RB15_0)

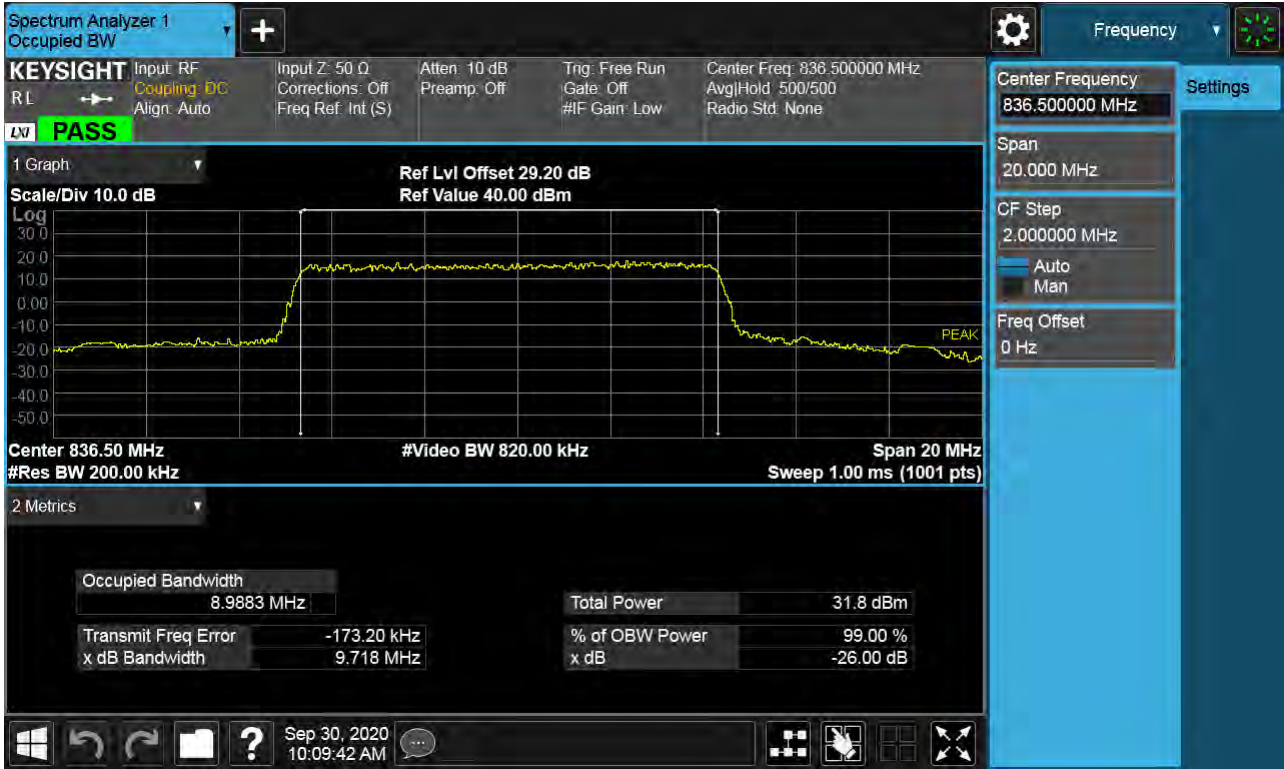


Sub6 n5. Occupied Bandwidth Plot (10M BW Ch.167300 16QAM_RB15_0)

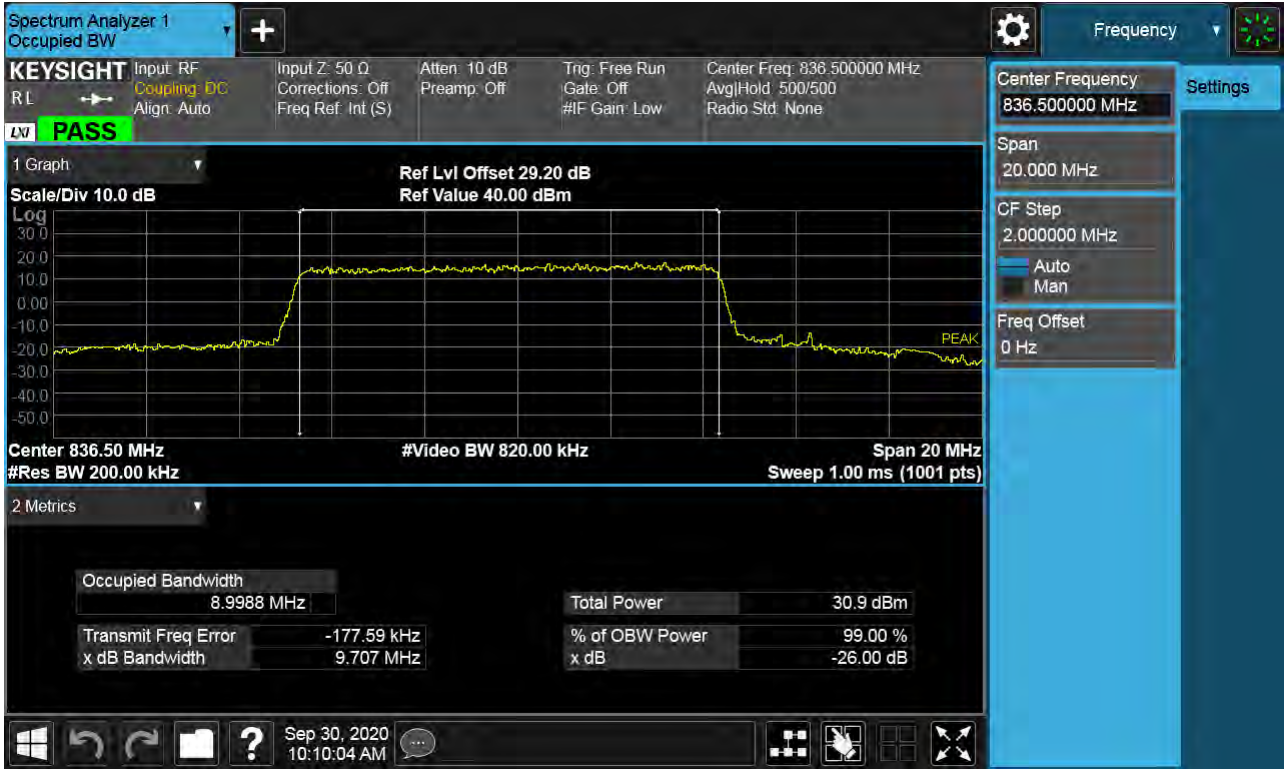

Sub6 n5. Occupied Bandwidth Plot (10M BW Ch.167300 64QAM_RB15_0)

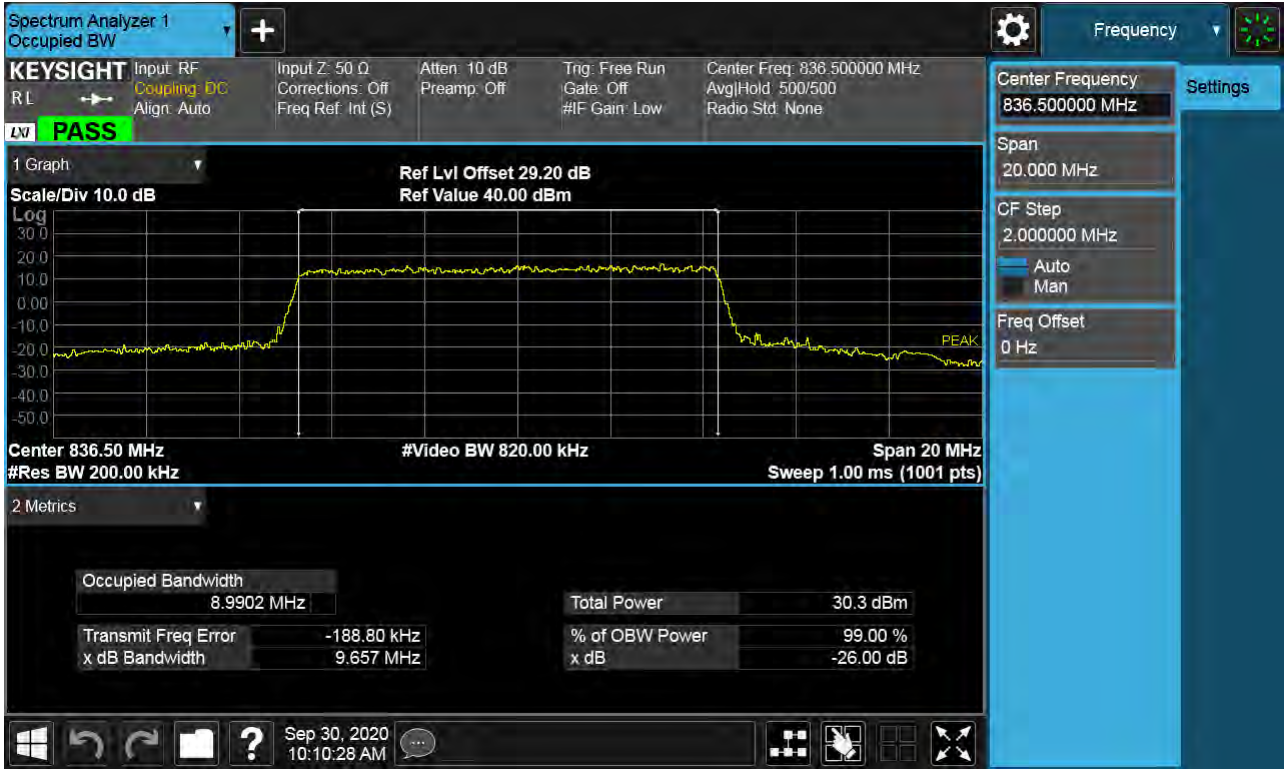

Sub6 n5. Occupied Bandwidth Plot (10M BW Ch.167300 256QAM_RB15_0)

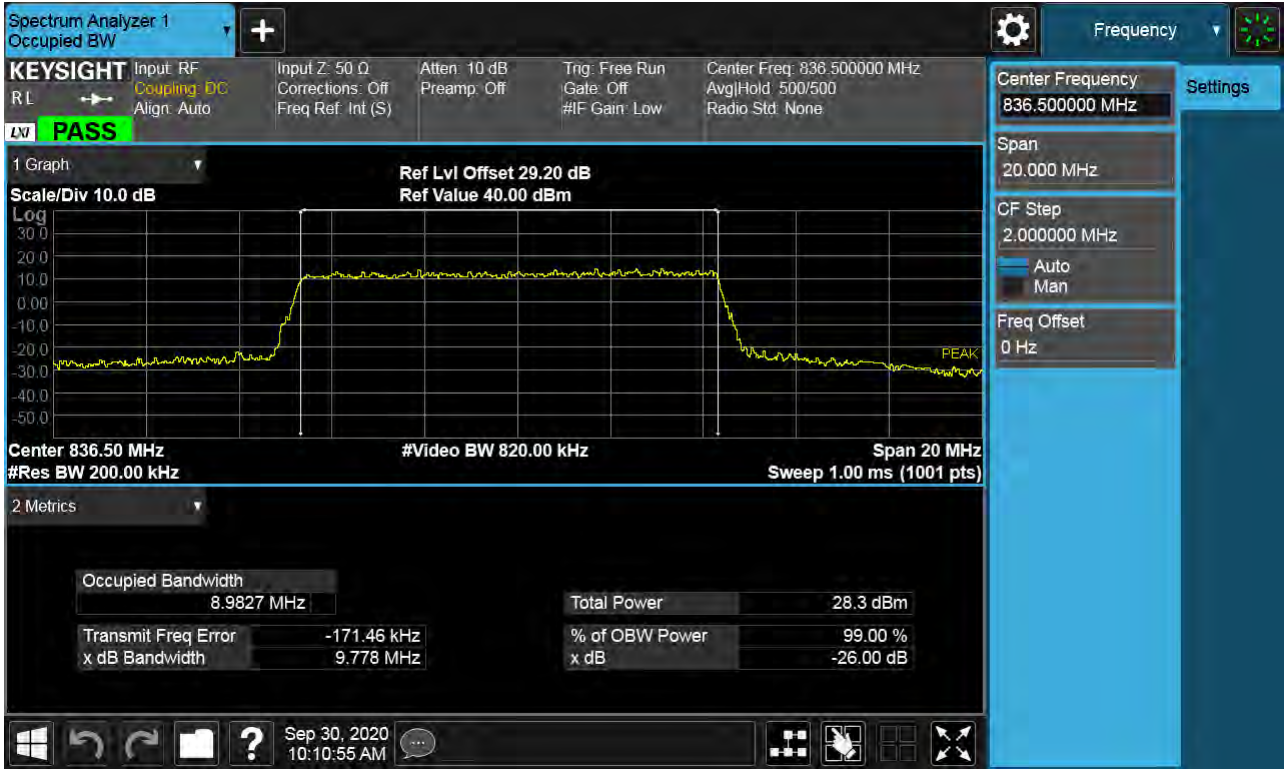

Sub6 n5. Occupied Bandwidth Plot (15M BW Ch.167300 BPSK_RB25_0)



Sub6 n5. Occupied Bandwidth Plot (15M BW Ch.167300 QPSK_RB25_0)




Sub6 n5. Occupied Bandwidth Plot (15M BW Ch.167300 16QAM_RB25_0)



Sub6 n5. Occupied Bandwidth Plot (15M BW Ch.167300 64QAM_RB25_0)



Sub6 n5. Occupied Bandwidth Plot (15M BW Ch.167300 256QAM_RB25_0)

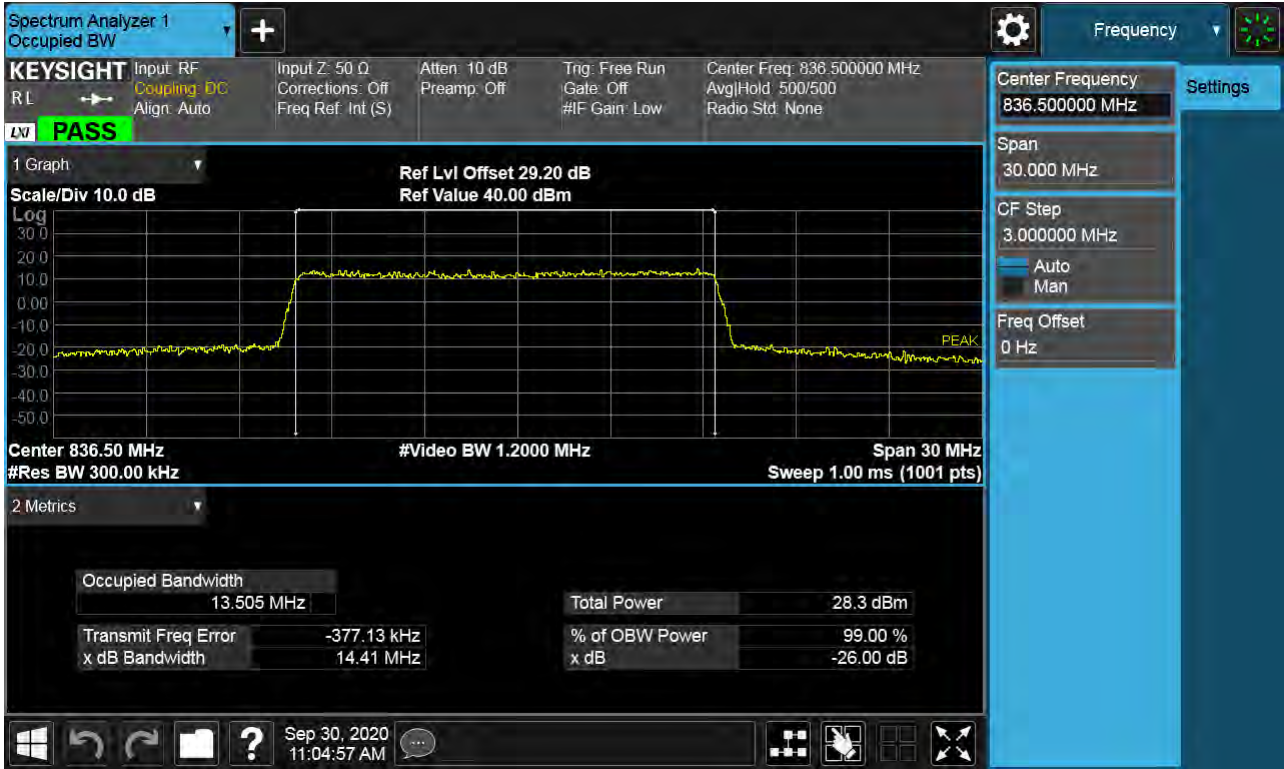

Sub6 n5. Occupied Bandwidth Plot (20M BW Ch.167300 BPSK_RB50_0)



Sub6 n5. Occupied Bandwidth Plot (20M BW Ch.167300 QPSK_RB50_0)



Sub6 n5. Occupied Bandwidth Plot (20M BW Ch.167300 16QAM_RB50_0)




Sub6 n5. Occupied Bandwidth Plot (20M BW Ch.167300 64QAM_RB50_0)



Sub6 n5. Occupied Bandwidth Plot (20M BW Ch.167300 256QAM_RB50_0)




Sub6 n66. PAR Plot (5M BW_Ch.349000_ BPSK_RB25_0)

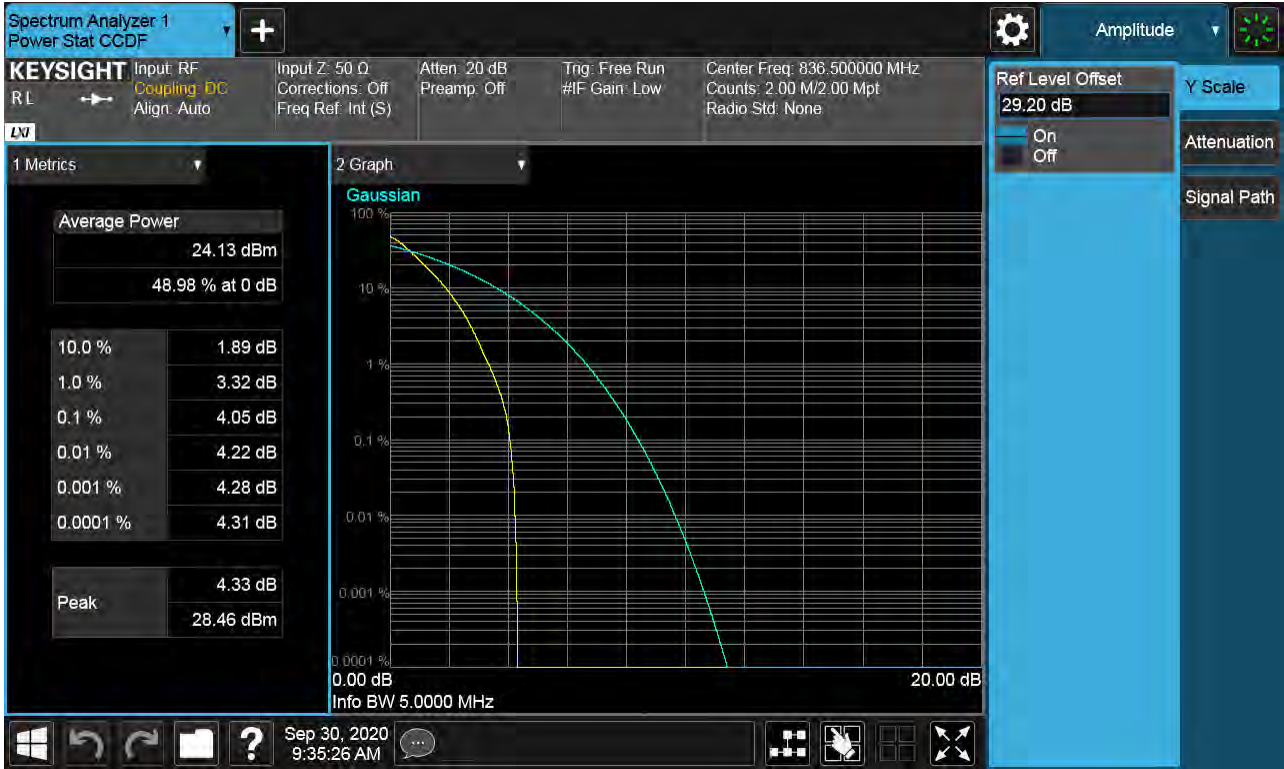


Sub6 n66. PAR Plot (5M BW_Ch.349000_QPSK_RB25_0)



Sub6 n66. PAR Plot (5M BW_Ch.349000_16QAM_RB25_0)

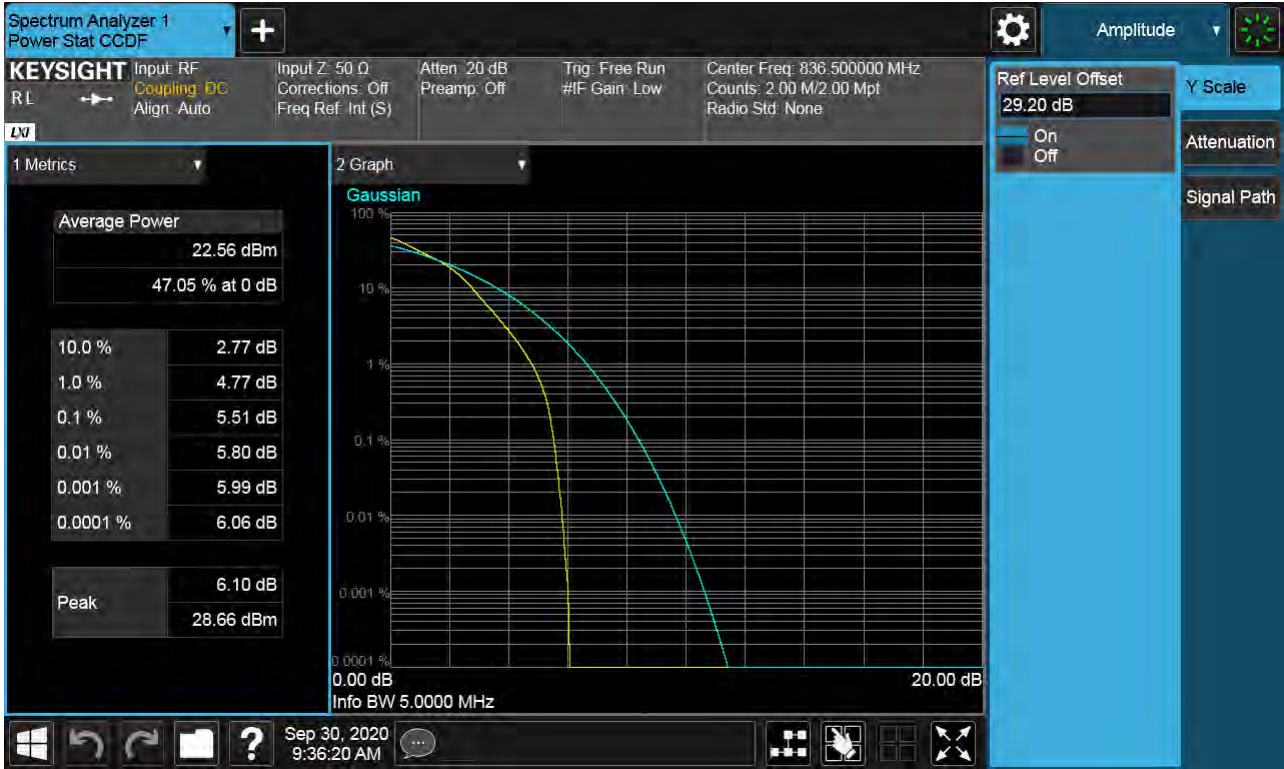


Sub6 n66. PAR Plot (5M BW_Ch.349000_64QAM_RB25_0)

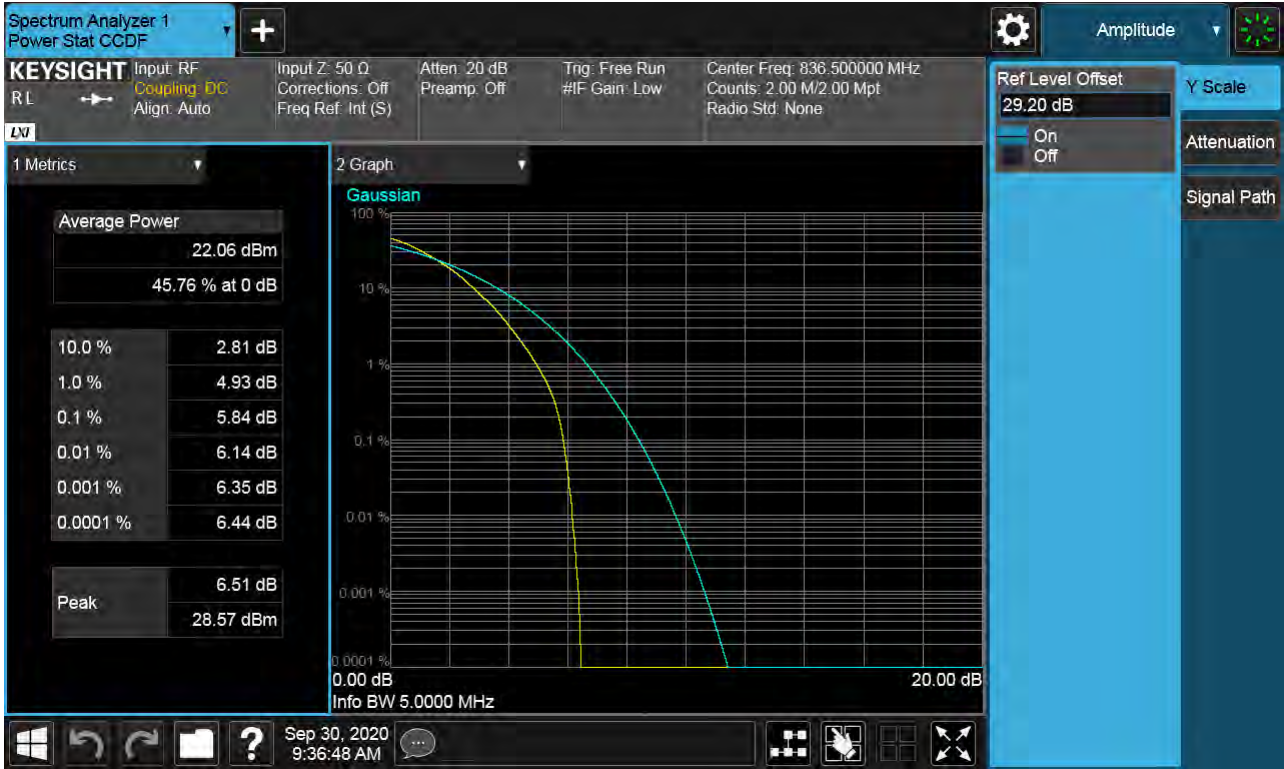

Sub6 n66. PAR Plot (5M BW_Ch.349000_256QAM_RB25_0)



Sub6 n66. PAR Plot (10M BW_Ch.349000_ BPSK_RB50_0)

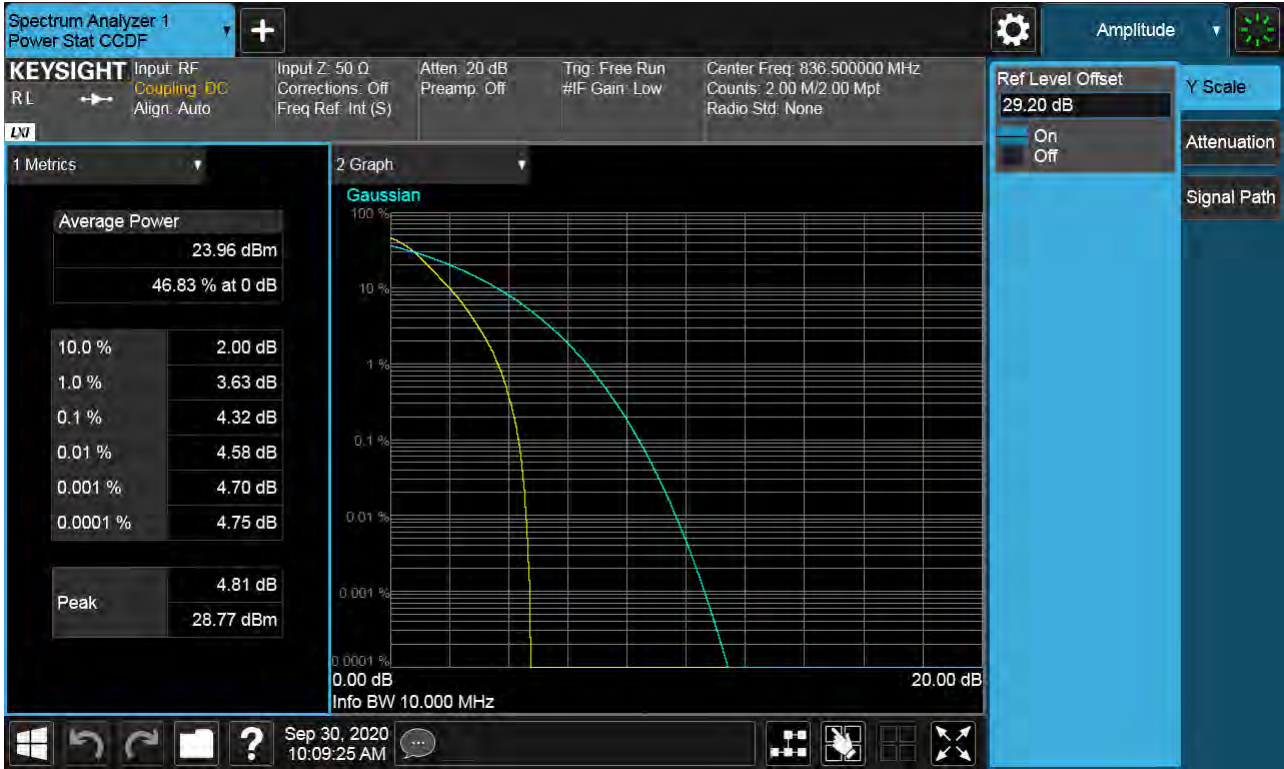


Sub6 n66. PAR Plot (10M BW_Ch.349000_QPSK_RB50_0)




Sub6 n66. PAR Plot (10M BW_Ch.349000_16QAM_RB50_0)



Sub6 n66. PAR Plot (10M BW_Ch.349000_64QAM_RB50_0)

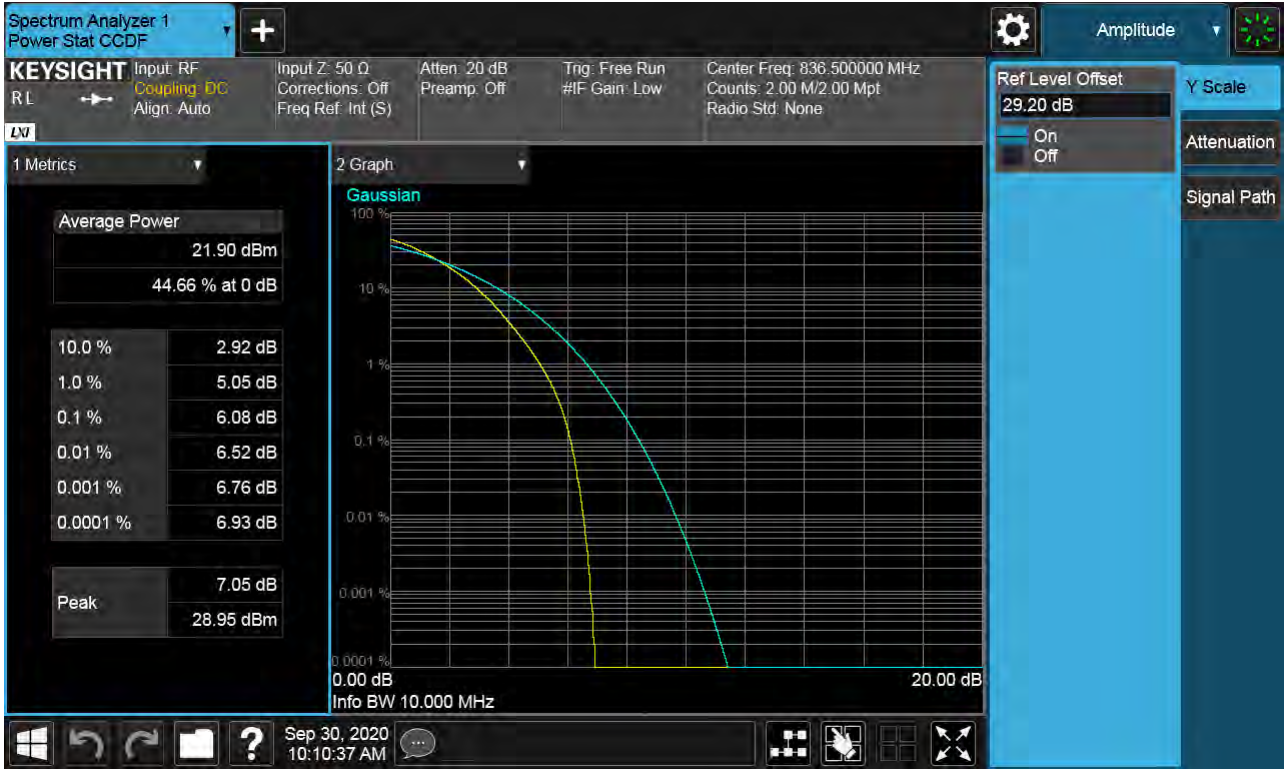


Sub6 n66. PAR Plot (10M BW_Ch.349000_256QAM_RB50_0)

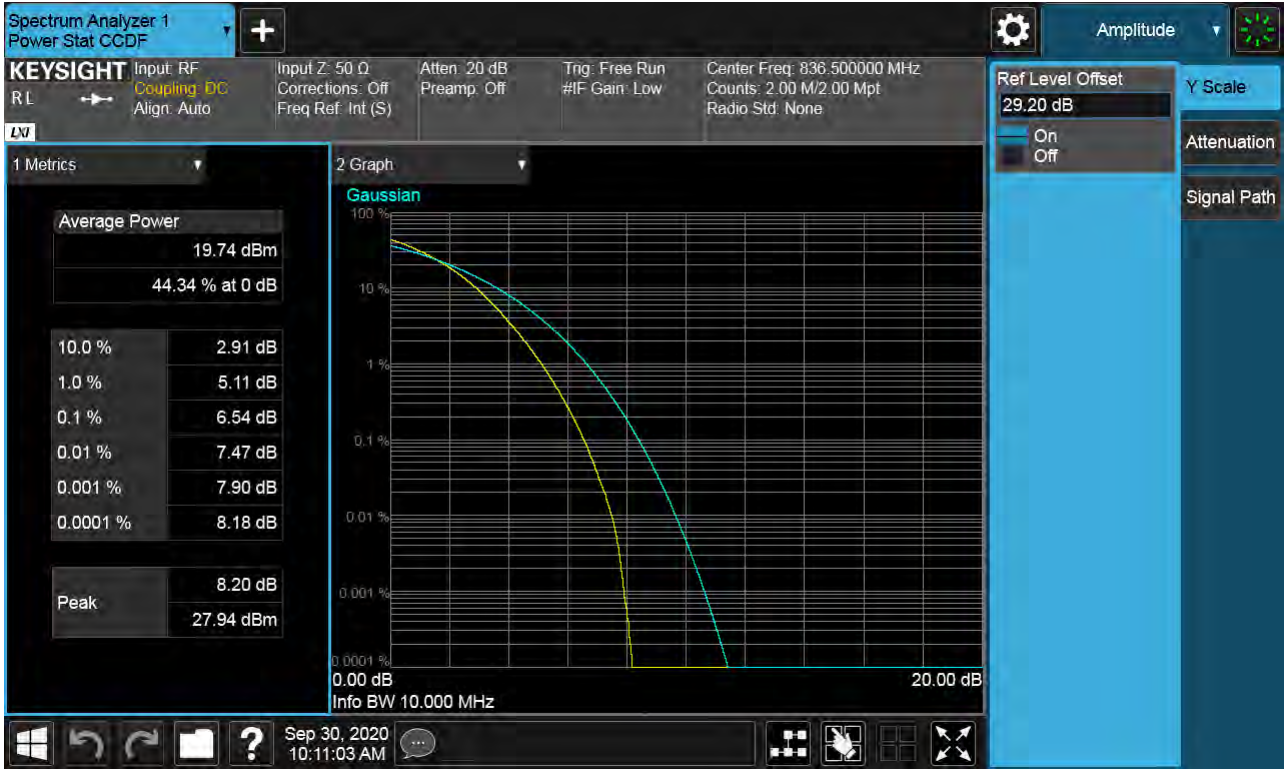


Sub6 n66. PAR Plot (15M BW_Ch.349000_ BPSK_RB75_0)




Sub6 n66. PAR Plot (15M BW_Ch.349000_QPSK_RB75_0)

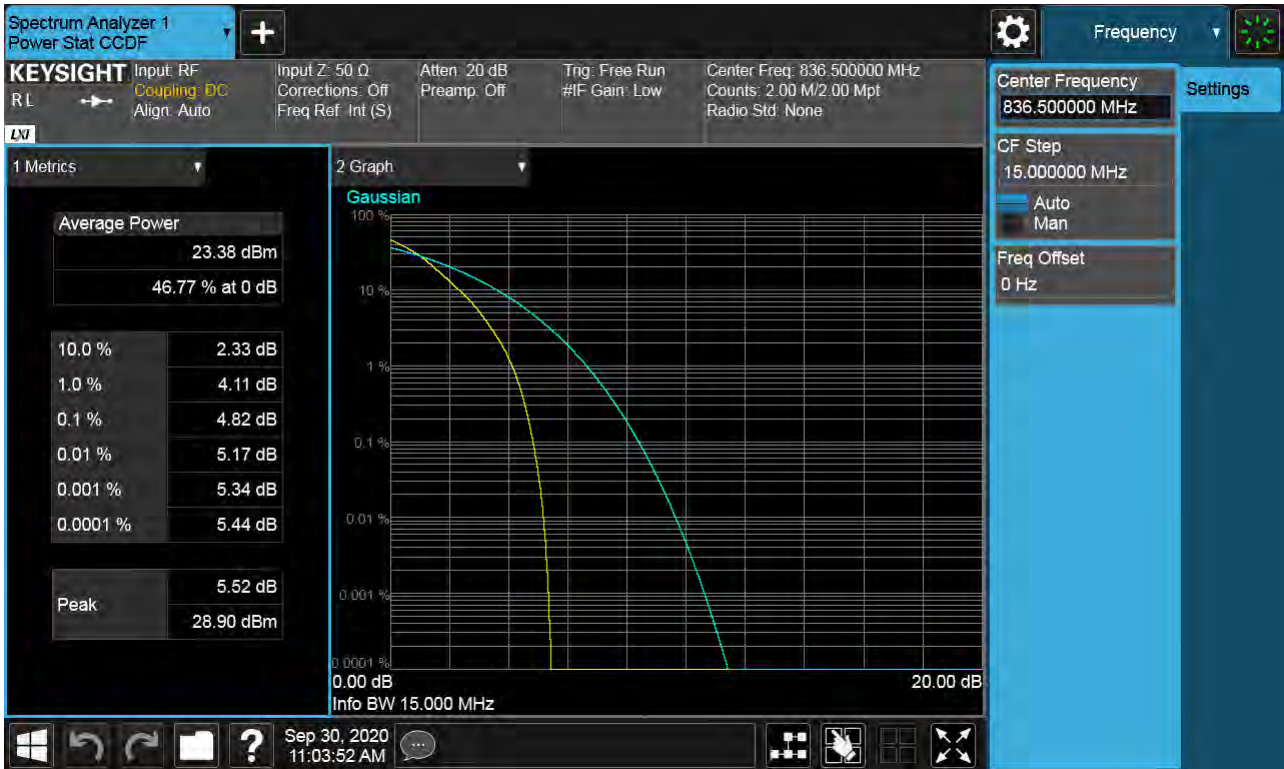

Sub6 n66. PAR Plot (15M BW_Ch.349000_16QAM_RB75_0)

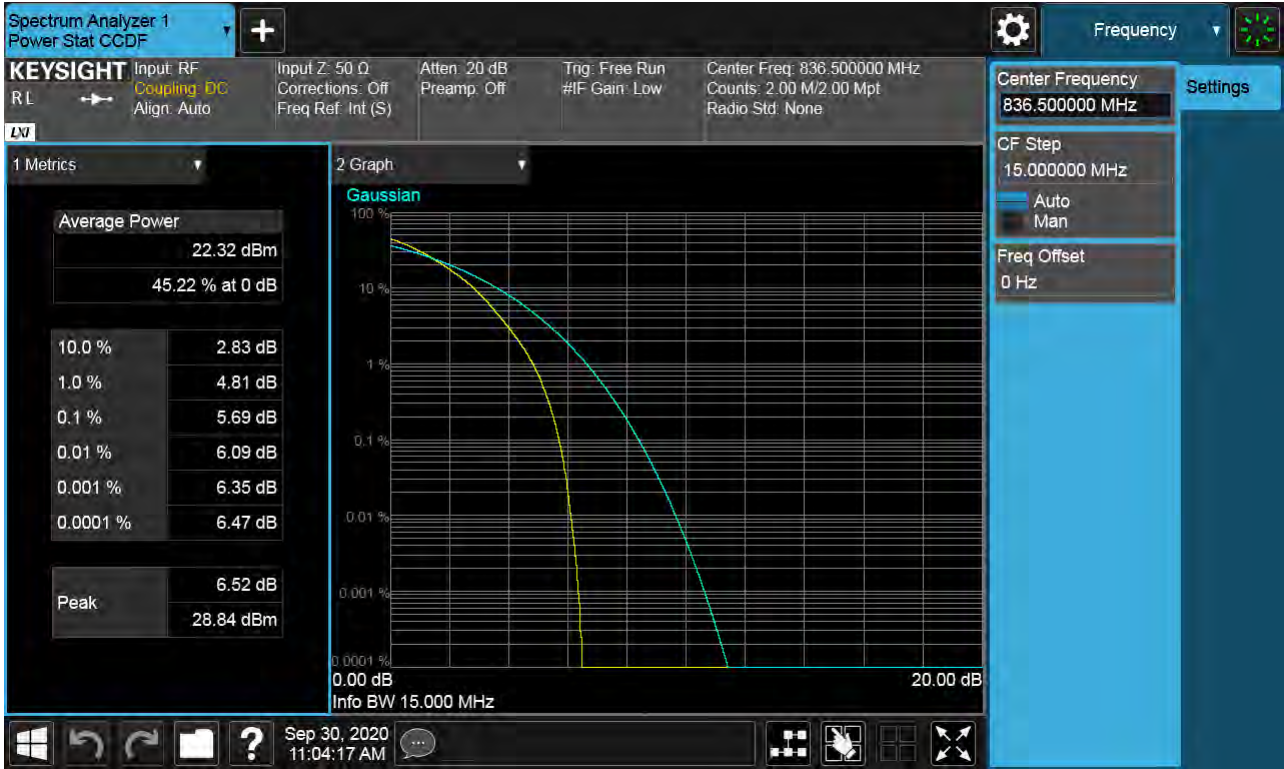

Sub6 n66. PAR Plot (15M BW_Ch.349000_64QAM_RB75_0)

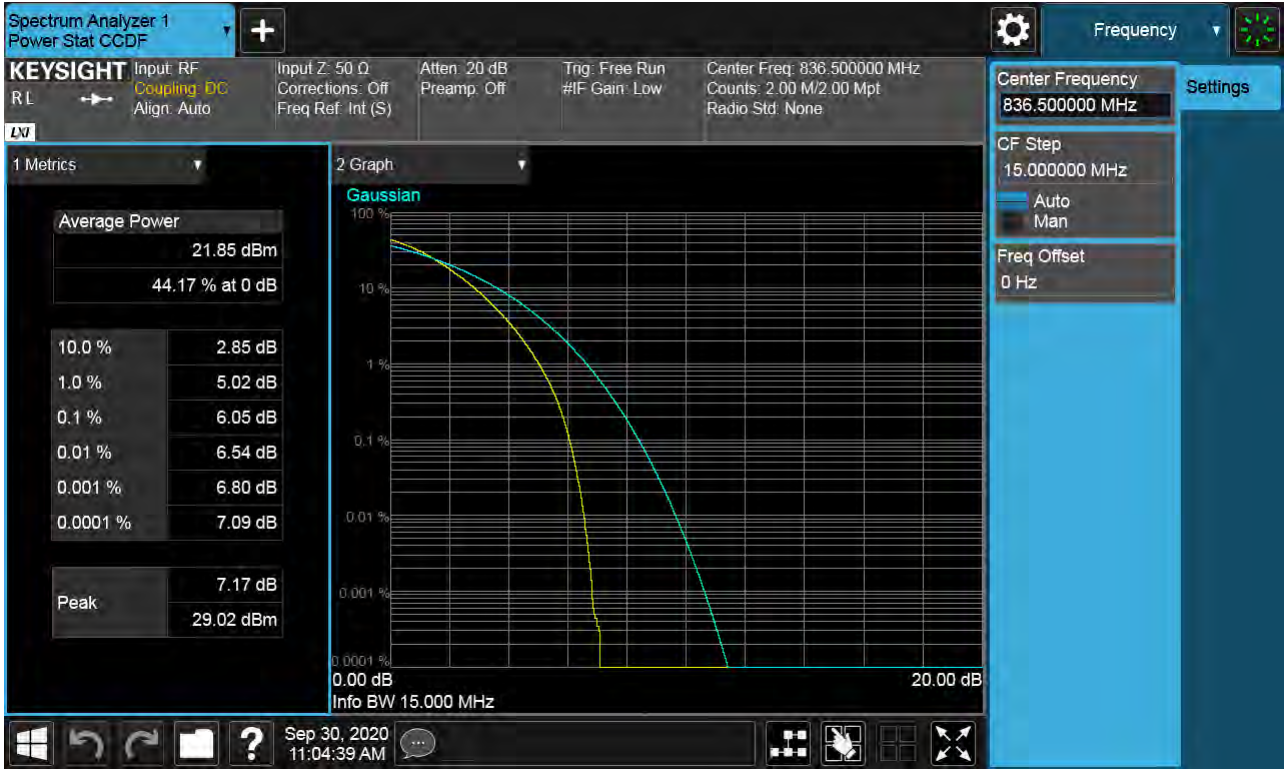

Sub6 n66. PAR Plot (15M BW_Ch.349000_256QAM_RB75_0)




Sub6 n66. PAR Plot (20M BW_Ch.349000_ BPSK_RB100_0)



Sub6 n66. PAR Plot (20M BW_Ch.349000_QPSK_RB100_0)



Sub6 n66. PAR Plot (20M BW_Ch.349000_16QAM_RB100_0)

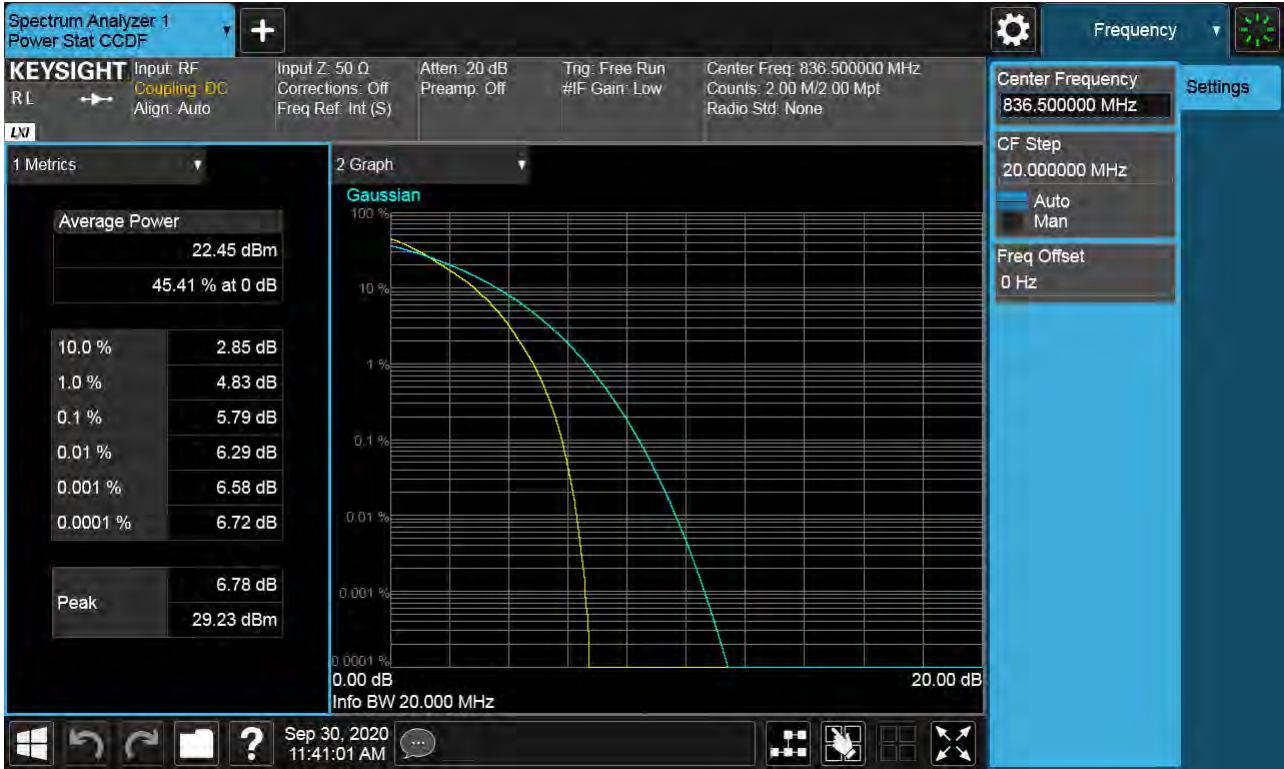


Sub6 n66. PAR Plot (20M BW_Ch.349000_64QAM_RB100_0)



Sub6 n66. PAR Plot (20M BW_Ch.349000_256QAM_RB100_0)



Sub6 n5. Lower Band Edge Plot (5M BW Ch.165300 BPSK_RB1_Offset 0)

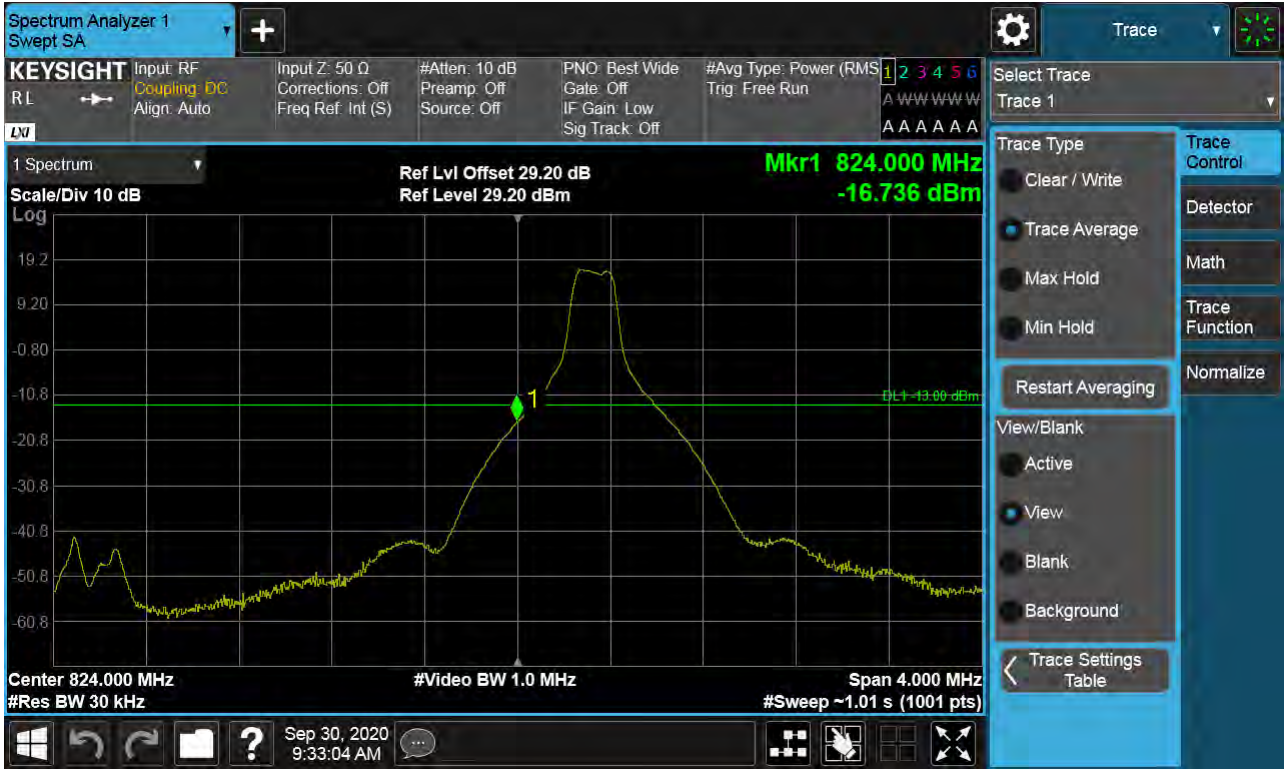

Sub6 n5. Lower Band Edge Plot (5M BW Ch.165300 BPSK_RB25_Offset 0)



Sub6 n5. Lower Extended Band Edge Plot (5M BW Ch.165300 BPSK_RB25_0)



Sub6 n5. Lower Band Edge Plot (10M BW Ch.165800 BPSK_RB1_Offset 0)




Sub6 n5. Lower Band Edge Plot (10M BW Ch.165800 BPSK_RB50_Offset 0)



Sub6 n5. Lower Extended Band Edge Plot (10M BW Ch.165800 BPSK_RB50_0)



Sub6 n5. Lower Band Edge Plot (15M BW Ch.166300 BPSK_RB1_Offset 0)

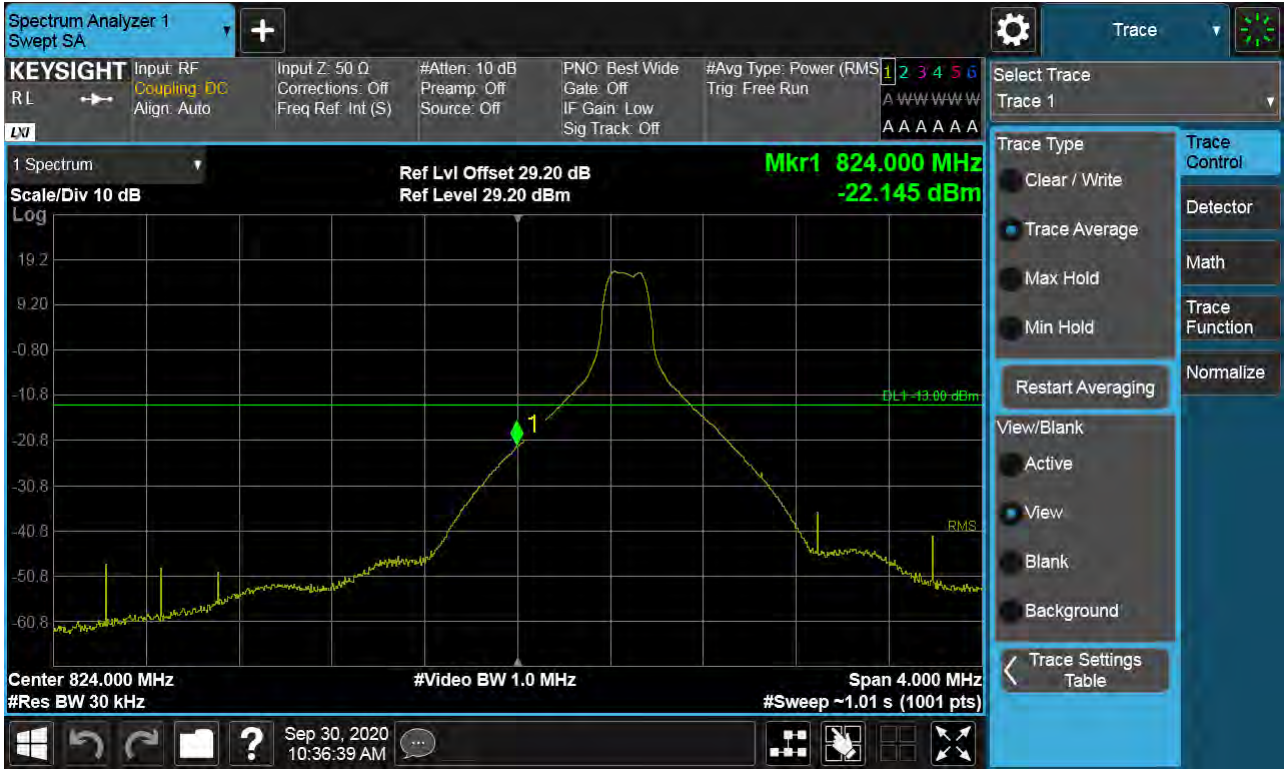


Sub6 n5. Lower Band Edge Plot (15M BW Ch.166300 BPSK_RB75_Offset 0)



Sub6 n5. Lower Extended Band Edge Plot (15M BW Ch.166300 BPSK_RB75_0)



Sub6 n5. Lower Band Edge Plot (20M BW Ch.166800 BPSK_RB1_Offset 0)

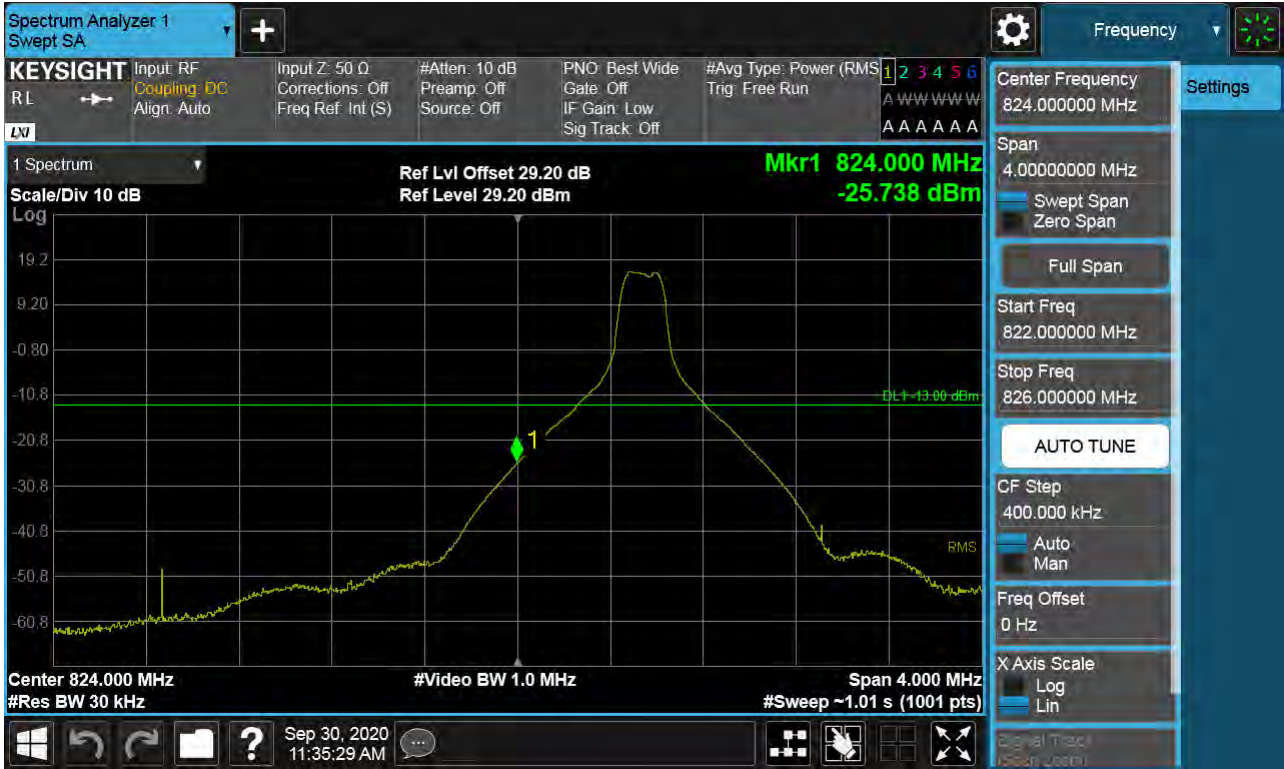


Sub6 n5. Lower Band Edge Plot (20M BW Ch.166800 BPSK_RB100_Offset 0)



Sub6 n5. Lower Extended Band Edge Plot (20M BW Ch.166800 BPSK_RB100_0)



Sub6 n5. Upper Band Edge Plot (5M BW Ch.169300 BPSK_RB1_Offset 24)

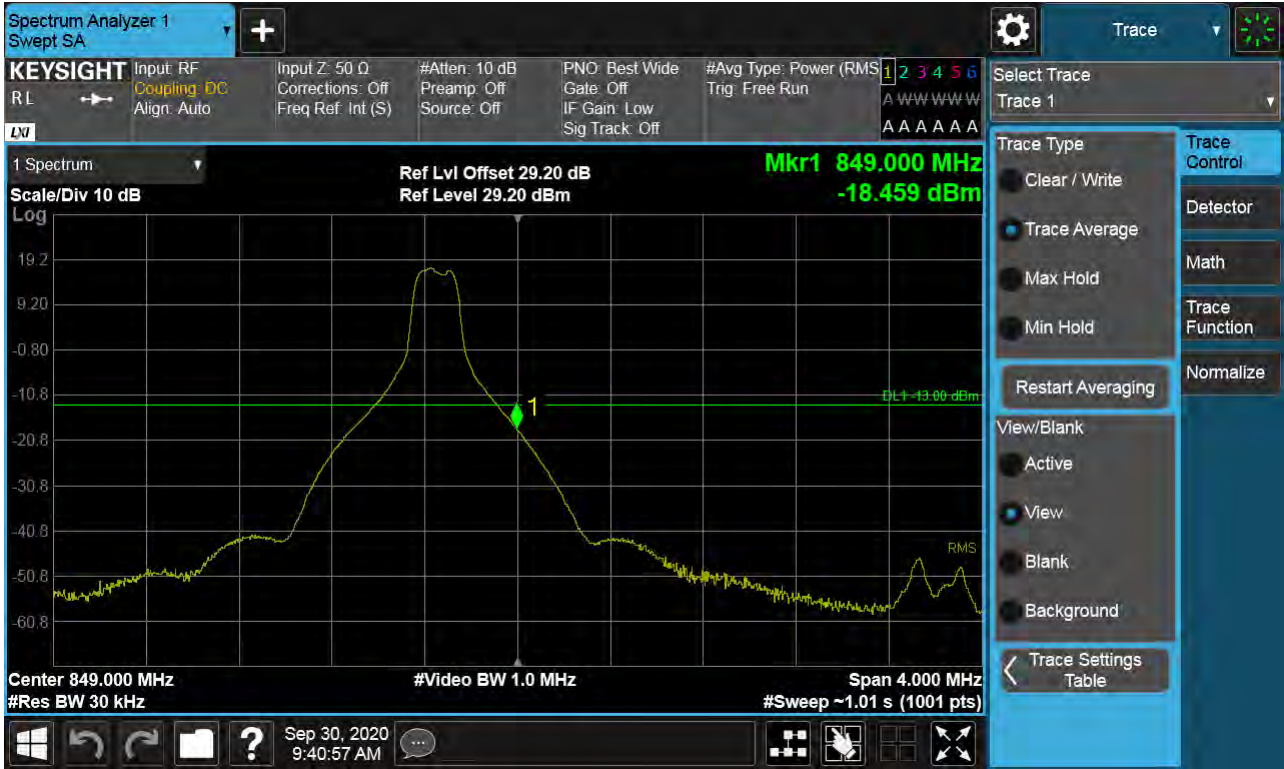


Sub6 n5. Upper Band Edge Plot (5M BW Ch.169300 BPSK_RB25_Offset 0)



Sub6 n5. Upper Extended Band Edge Plot (5M BW Ch.169300 BPSK_RB25_0)




Sub6 n5. Upper Band Edge Plot (10M BW Ch.168800 BPSK_RB1_Offset 49)

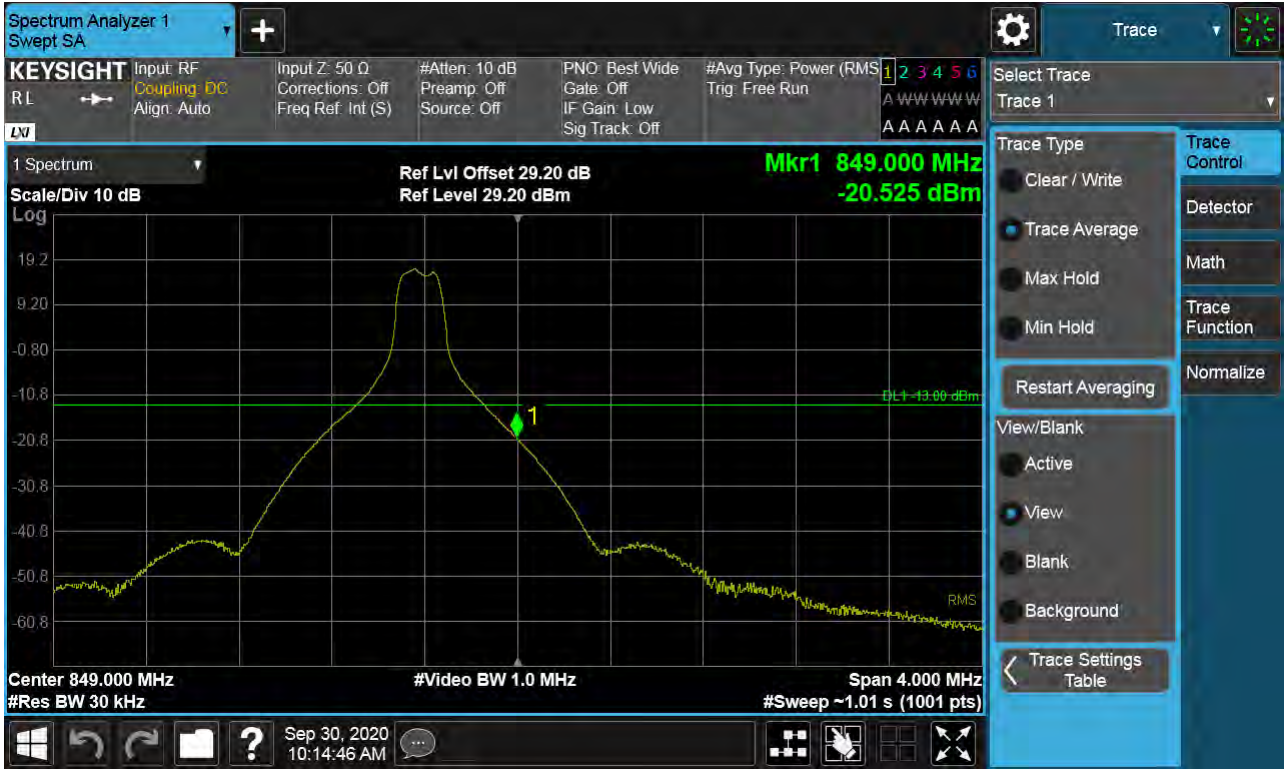

Sub6 n5. Upper Band Edge Plot (10M BW Ch.168800 BPSK_RB50_Offset 0)



Sub6 n5. Upper Extended Band Edge Plot (10M BW Ch.168800 BPSK_RB50_0)

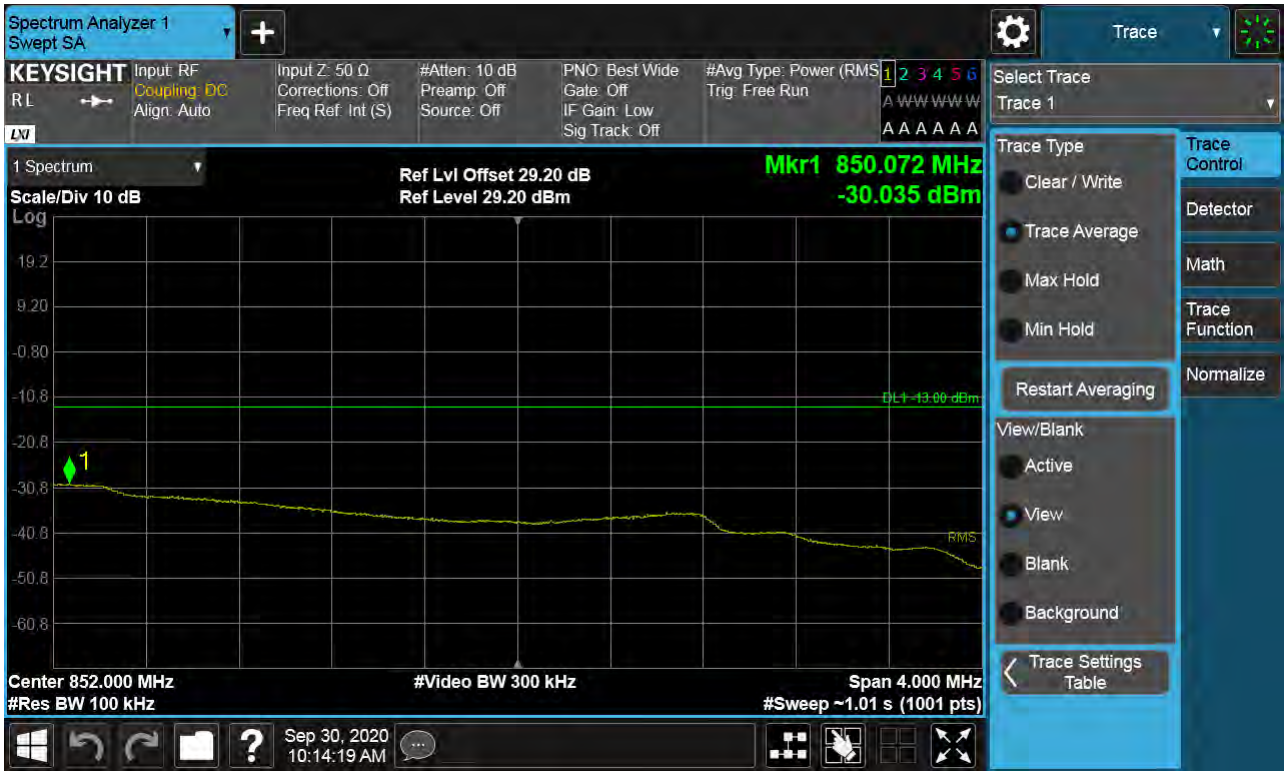

Sub6 n5. Upper Band Edge Plot (15M BW Ch.168300 BPSK_RB1_Offset 74)



Sub6 n5. Upper Band Edge Plot (15M BW Ch.168300 BPSK_RB75_Offset 0)



Sub6 n5. Upper Extended Band Edge Plot (15M BW Ch.168300 BPSK_RB75_0)



Sub6 n5. Upper Band Edge Plot (20M BW Ch.167800 BPSK_RB1_Offset 99)




Sub6 n5. Upper Band Edge Plot (20M BW Ch.167800 BPSK_RB100_Offset 0)




Sub6 n5. Upper Extended Band Edge Plot (20M BW Ch.167800 BPSK_RB100_0)




Sub6 n5. Conducted Spurious Plot (165300ch_5MHz_BPSK_RB 1_1)

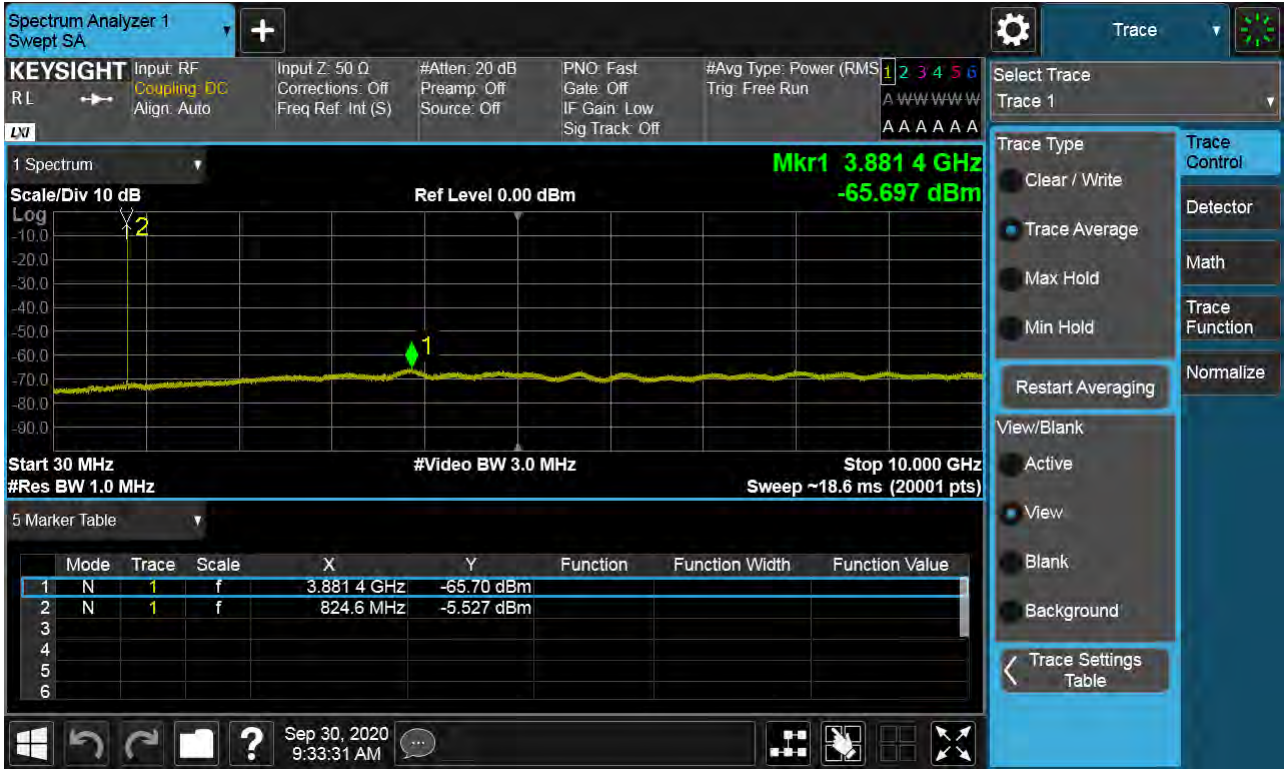


Sub6 n5. Conducted Spurious Plot (167300ch_5MHz_BPSK_RB 1_1)

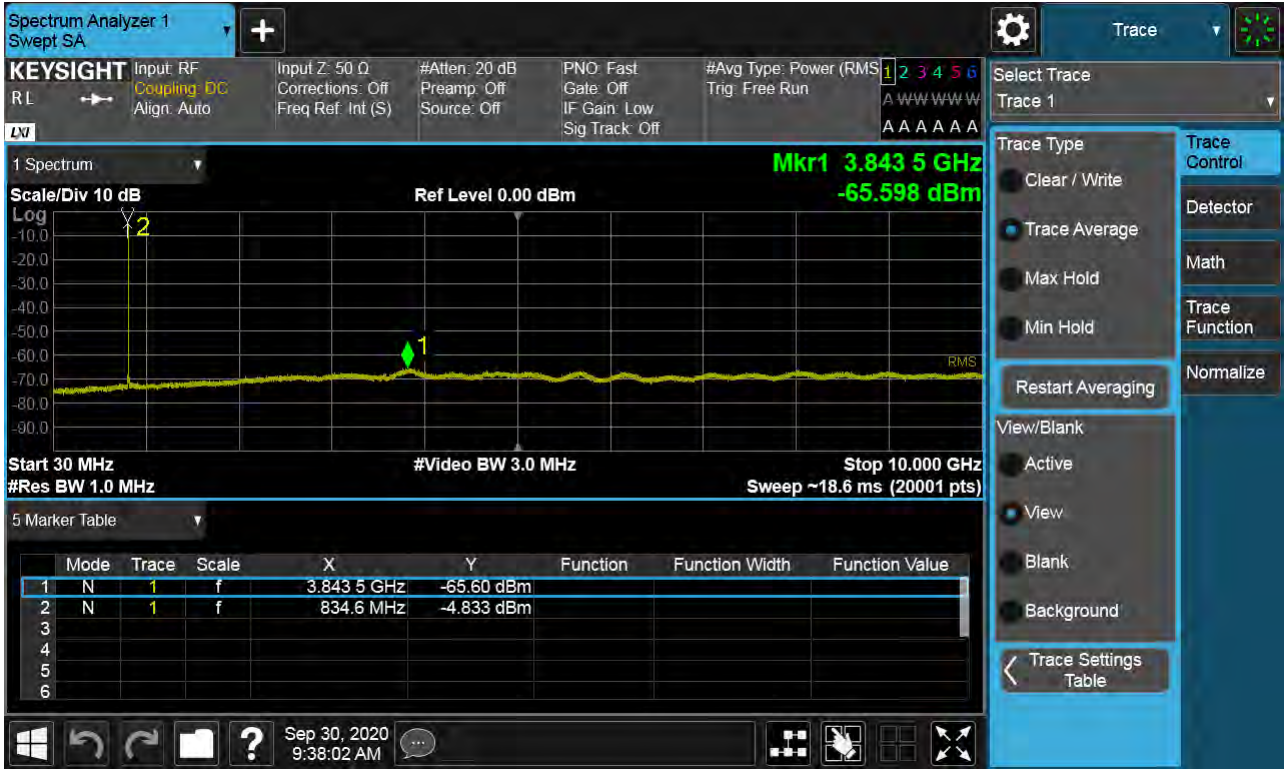

Sub6 n5. Conducted Spurious Plot (169300ch_5MHz_BPSK_RB 1_1)

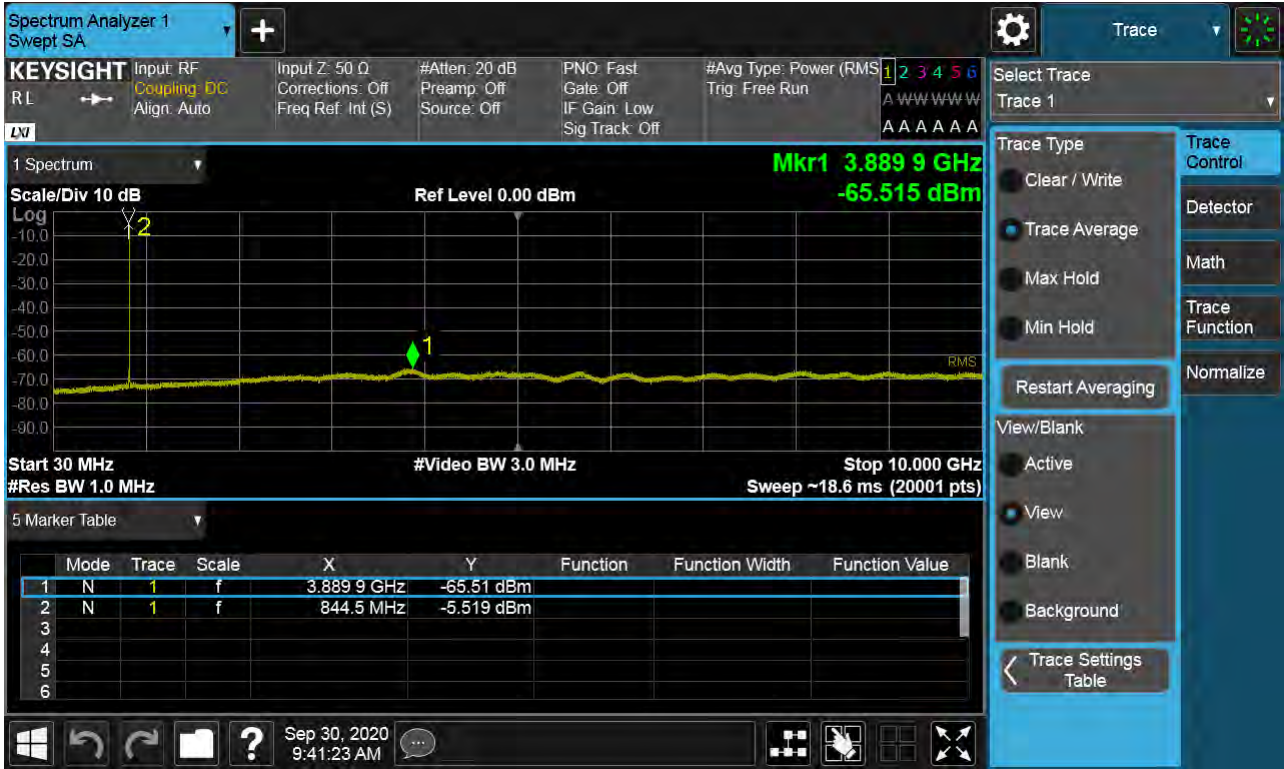


Sub6 n5. Conducted Spurious Plot (165800ch_10MHz_BPSK_RB 1_1)

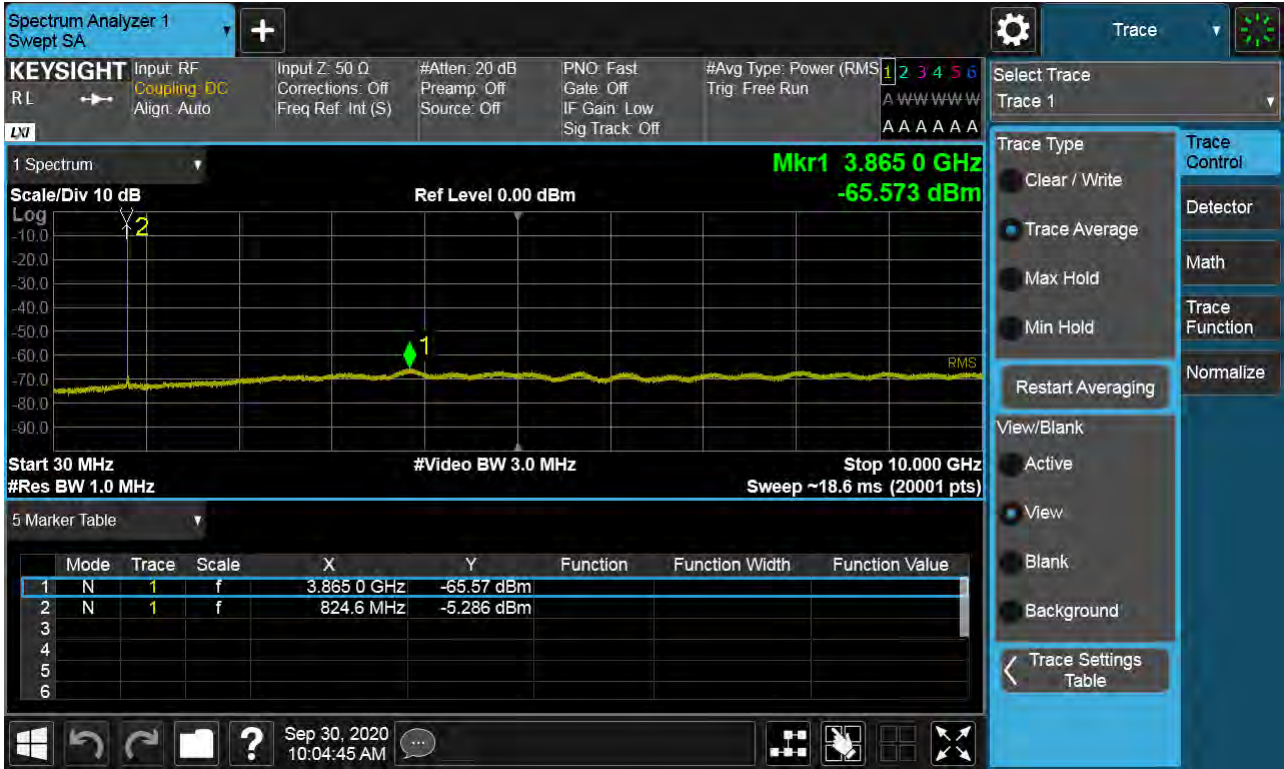


Sub6 n5. Conducted Spurious Plot (167300ch_10MHz_BPSK_RB 1_1)




Sub6 n5. Conducted Spurious Plot (168800ch_10MHz_BPSK_RB 1_1)

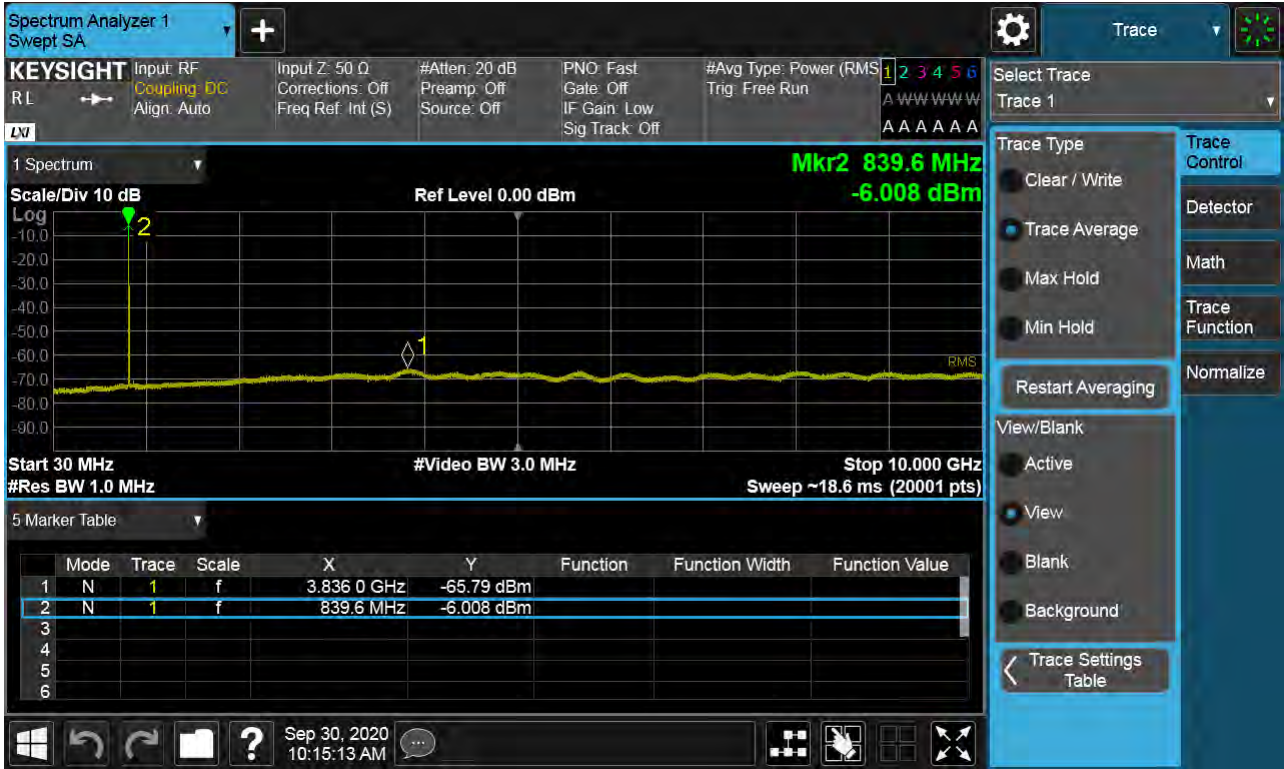


Sub6 n5. Conducted Spurious Plot (166300ch_15MHz_BPSK_RB 1_1)

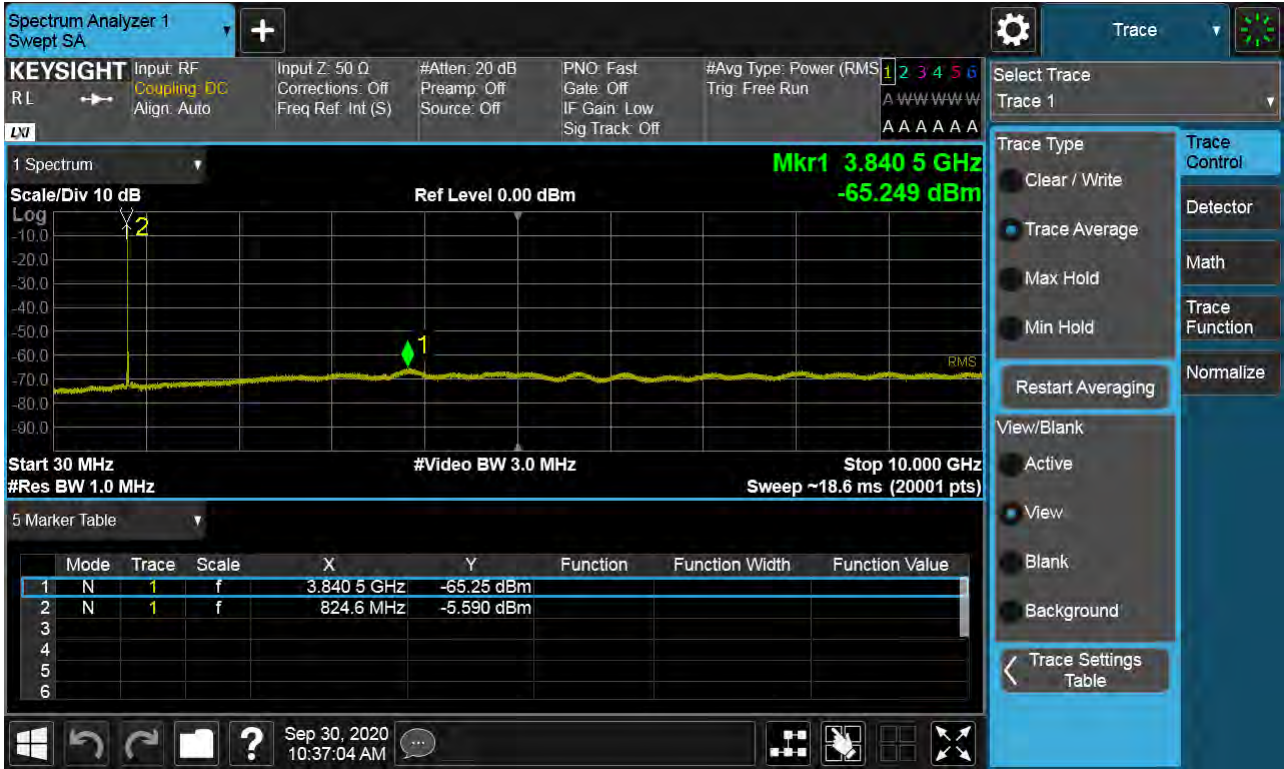


Sub6 n5. Conducted Spurious Plot (167300ch_15MHz_BPSK_RB 1_1)

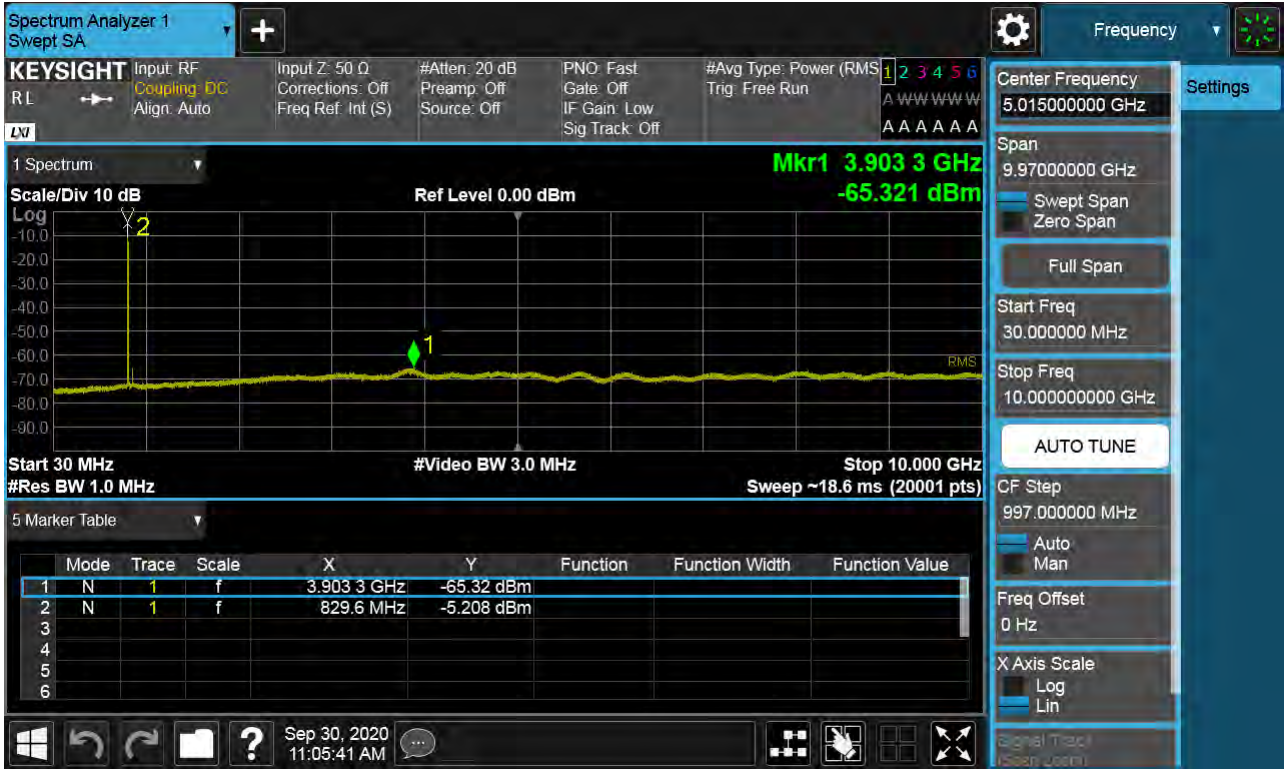


Sub6 n5. Conducted Spurious Plot (168300ch_15MHz_BPSK_RB 1_1)

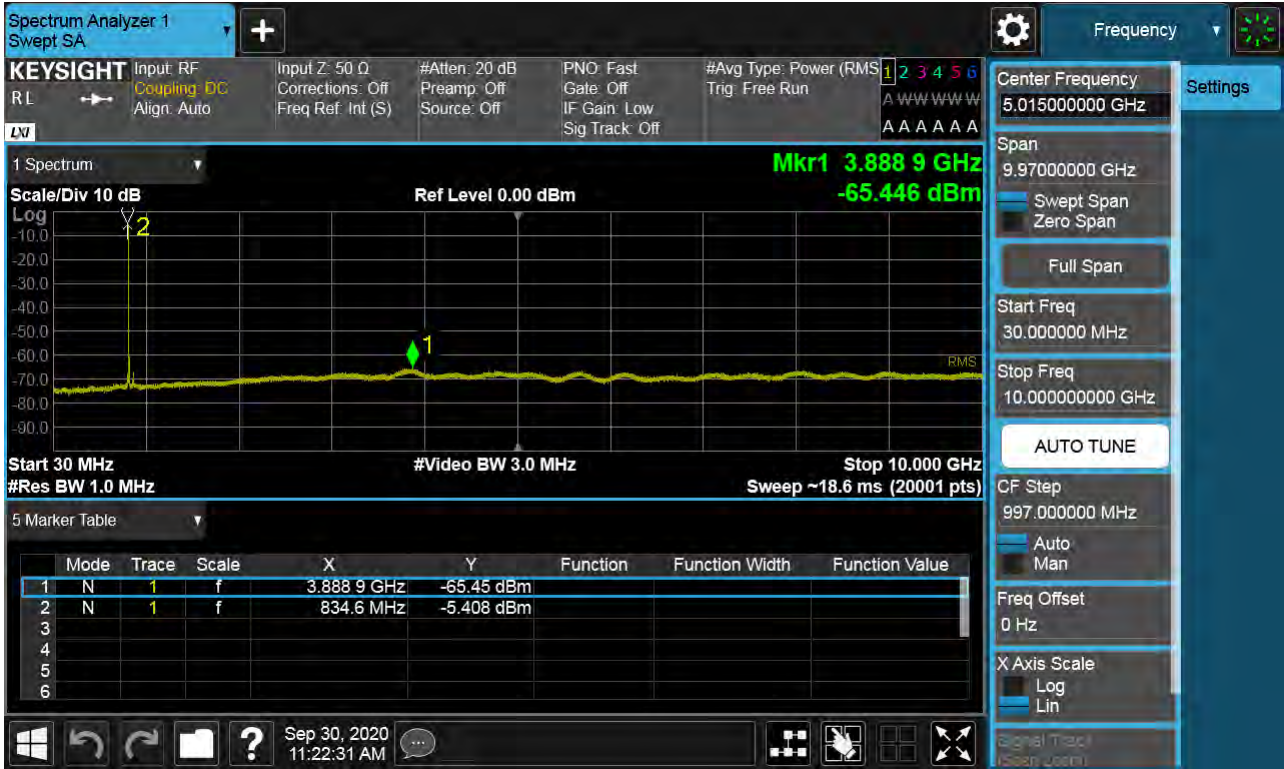

Sub6 n5. Conducted Spurious Plot (166800ch_20MHz_BPSK_RB 1_1)

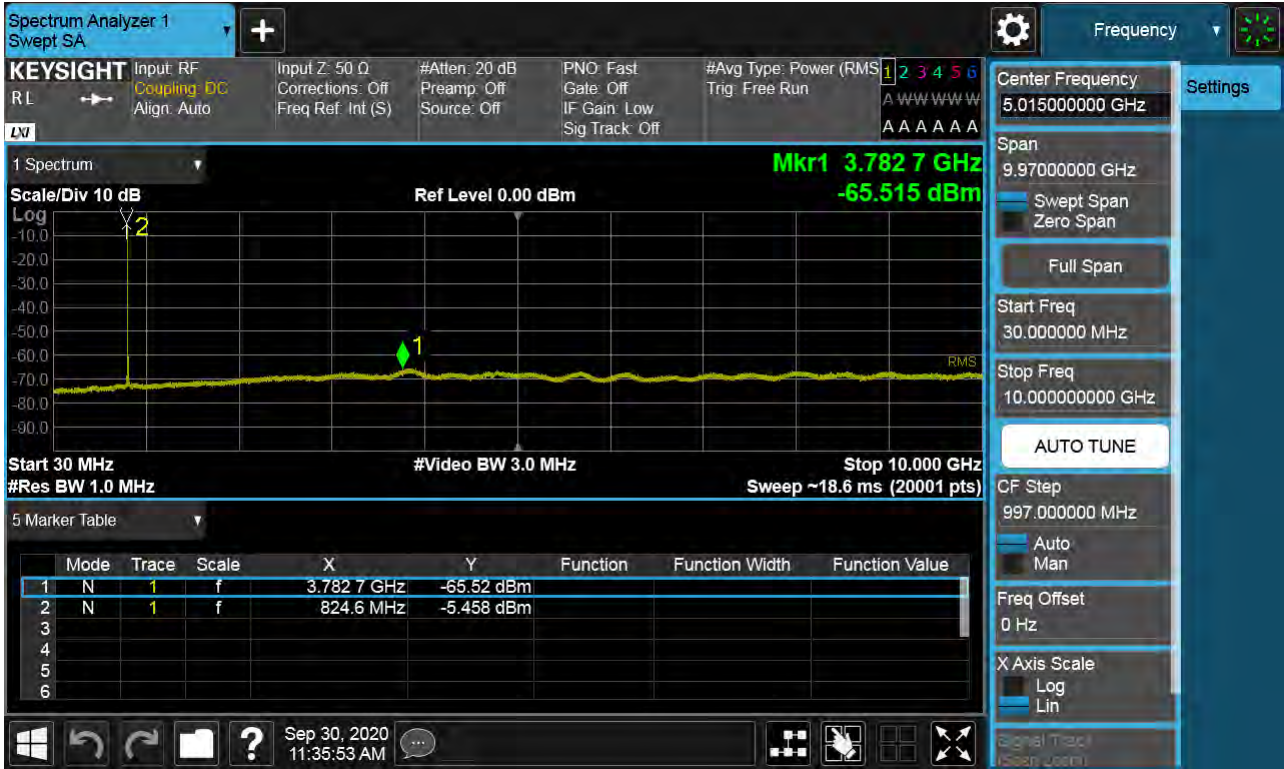

Sub6 n5. Conducted Spurious Plot (167300ch_20MHz_BPSK_RB 1_1)

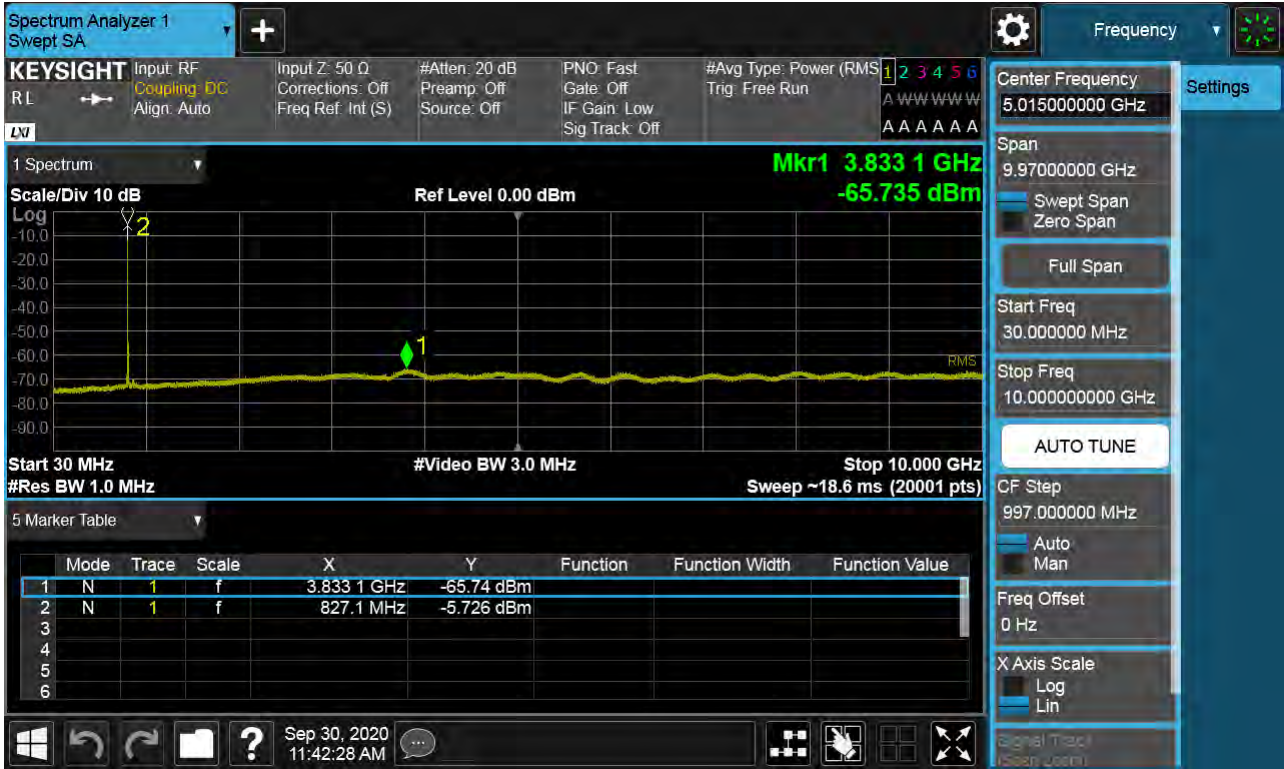

Sub6 n5. Conducted Spurious Plot (167800ch_20MHz_BPSK_RB 1_1)



10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2011-FC002-P