

FCC Carrier Aggregation REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
November 13, 2020

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-2011-FC011-R2

FCC ID: A3LSMG991U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-G991U
 Additional Model(s): SM-G991U1
 EUT Type: Mobile Phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §27, §2

Mode (PCC+SCC)	Tx Frequency (MHz)	Modulation	Emission Designator	EIRP	
				Max. Power (dBm)	Max. Power (W)
5MHz + 20MHz (PC3)	2499.3 - 2680.0	QPSK	22M9G7D	24.55	0.285
		16QAM	22M8W7D	24.91	0.310
		64QAM	22M9W7D	24.20	0.263
		256QAM	22M8W7D	20.78	0.120
10MHz + 15MHz (PC3)	2501.3 - 2682.5	QPSK	23M1G7D	24.76	0.299
		16QAM	23M1W7D	25.11	0.324
		64QAM	23M1W7D	23.16	0.207
		256QAM	23M1W7D	21.16	0.131
10MHz + 20MHz (PC3)	2501.5 - 2680.0	QPSK	27M7G7D	24.71	0.296
		16QAM	27M7W7D	25.20	0.331
		64QAM	27M7W7D	23.33	0.215
		256QAM	27M7W7D	21.28	0.134
15MHz + 10MHz (PC3)	2503.5 - 2684.7	QPSK	23M2G7D	24.64	0.291
		16QAM	23M2W7D	25.10	0.324
		64QAM	23M2W7D	23.19	0.208
		256QAM	23M1W7D	21.26	0.134
15MHz + 15MHz (PC3)	2503.5 - 2682.5	QPSK	28M3G7D	24.47	0.280
		16QAM	28M3W7D	24.84	0.305
		64QAM	28M3W7D	23.25	0.211
		256QAM	28M4W7D	21.03	0.127
15MHz + 20MHz (PC3)	2503.8 - 2680.0	QPSK	32M7G7D	24.64	0.291
		16QAM	32M6W7D	25.00	0.316
		64QAM	32M6W7D	23.22	0.210
		256QAM	32M6W7D	21.02	0.126
20MHz + 5MHz (PC3)	2506.0 - 2686.7	QPSK	22M9G7D	24.23	0.265
		16QAM	23M0W7D	24.36	0.273
		64QAM	22M8W7D	24.16	0.261
		256QAM	22M9W7D	20.67	0.117
20MHz + 10MHz (PC3)	2506.0 - 2684.5	QPSK	27M9G7D	24.48	0.281
		16QAM	27M8W7D	24.81	0.303
		64QAM	27M7W7D	23.72	0.236
		256QAM	27M8W7D	20.82	0.121
20MHz + 15MHz (PC3)	2506.0 - 2682.2	QPSK	32M6G7D	24.58	0.287
		16QAM	32M5W7D	25.12	0.325
		64QAM	32M5W7D	24.12	0.258
		256QAM	32M5W7D	22.88	0.194
20MHz + 20MHz (PC3)	2506.0 - 2680.0	QPSK	37M6G7D	24.66	0.292
		16QAM	37M5W7D	24.96	0.313
		64QAM	37M5W7D	23.25	0.211
		256QAM	37M5W7D	21.07	0.128

Mode (PCC+SCC)	Tx Frequency (MHz)	Modulation	Emission Designator	EIRP	
				Max. Power (dBm)	Max. Power (W)
5MHz + 20MHz (PC2)	2499.3 - 2680.0	QPSK	22M9G7D	25.83	0.383
		16QAM	22M8W7D	24.83	0.304
		64QAM	22M8W7D	22.25	0.168
		256QAM	22M8W7D	20.80	0.120
10MHz + 15MHz (PC2)	2501.3 - 2682.5	QPSK	23M1G7D	25.71	0.372
		16QAM	23M1W7D	24.87	0.307
		64QAM	23M1W7D	22.03	0.160
		256QAM	23M1W7D	20.78	0.120
10MHz + 20MHz (PC2)	2501.5 - 2680.0	QPSK	27M8G7D	26.04	0.402
		16QAM	27M7W7D	25.08	0.322
		64QAM	27M7W7D	22.45	0.176
		256QAM	27M7W7D	20.88	0.122
15MHz + 10MHz (PC2)	2503.5 - 2684.7	QPSK	23M1G7D	25.89	0.388
		16QAM	23M1W7D	25.01	0.317
		64QAM	23M1W7D	22.24	0.167
		256QAM	23M1W7D	20.79	0.120
15MHz + 15MHz (PC2)	2503.5 - 2682.5	QPSK	28M4G7D	25.95	0.394
		16QAM	28M4W7D	24.86	0.306
		64QAM	28M3W7D	22.02	0.159
		256QAM	28M4W7D	20.77	0.119
15MHz + 20MHz (PC2)	2503.8 - 2680.0	QPSK	32M7G7D	25.92	0.391
		16QAM	32M6W7D	25.04	0.319
		64QAM	32M6W7D	22.41	0.174
		256QAM	32M6W7D	20.86	0.122
20MHz + 5MHz (PC2)	2506.0 - 2686.7	QPSK	23M0G7D	25.82	0.382
		16QAM	22M9W7D	24.43	0.277
		64QAM	22M8W7D	21.58	0.144
		256QAM	22M9W7D	20.32	0.108
20MHz + 10MHz (PC2)	2506.0 - 2684.5	QPSK	27M8G7D	25.83	0.383
		16QAM	27M8W7D	24.74	0.298
		64QAM	27M7W7D	22.17	0.165
		256QAM	27M8W7D	20.87	0.122
20MHz + 15MHz (PC2)	2506.0 - 2682.2	QPSK	32M6G7D	25.89	0.388
		16QAM	32M5W7D	25.01	0.317
		64QAM	32M5W7D	22.41	0.174
		256QAM	32M5W7D	21.22	0.132
20MHz + 20MHz (PC2)	2506.0 - 2680.0	QPSK	37M7G7D	25.93	0.392
		16QAM	37M6W7D	24.91	0.310
		64QAM	37M7W7D	22.33	0.171
		256QAM	37M5W7D	21.06	0.128

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

REVIEWED BY



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center



Report approved by : Kwon Jeong
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2011-FC011	November 02, 2020	- First Approval Report
HCT-RF-2011-FC011-R1	November 04, 2020	- Revised the all PC2 section result.
HCT-RF-2011-FC011-R2	November 13, 2020	- Revised the Max power table on 1 page.

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	3
1. GENERAL INFORMATION	7
2. INTRODUCTION	8
2.1. DESCRIPTION OF EUT	8
2.2. MEASURING INSTRUMENT CALIBRATION	8
2.3. TEST FACILITY	8
3. DESCRIPTION OF TESTS.....	9
3.1 TEST PROCEDURE	9
3.2 RADIATED POWER.....	10
3.3 RADIATED SPURIOUS EMISSIONS	11
3.4 PEAK- TO- AVERAGE RATIO.....	12
3.5 OCCUPIED BANDWIDTH.	14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	15
3.7 CHANNEL EDGE.....	16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION	22
8. TEST DATA	24
8.1 Conducted Power	29
8.1.1 PC3.....	29
8.1.2 PC2.....	32
8.2 Equivalent Isotropic Radiated Power	35
8.2.1 PC3.....	35
8.2.2 PC2.....	38
8.3 Conducted Spurious Emissions	41
8.3.1 PC3.....	41
8.3.2 PC2.....	66
8.4 Channel Edge.....	91
8.4.1 PC3.....	91
8.4.2 PC2.....	106
8.5 Frequency Stability / Variation Of Ambient Temperature	121
8.5.1 PC3.....	121
8.5.2 PC2.....	129
8.6 Radiated Spurious Emissions.....	137
8.6.1 PC3.....	137

8.6.2 PC2.....	140
8.7 Occupied Bandwidth.....	143
8.7.1 PC3.....	143
8.7.2 PC2.....	149
8.8 Peak- to- Average Ratio	155
8.8.1 PC3.....	155
8.8.2 PC2.....	161
9. ANNEX A_ TEST SETUP PHOTO.....	167

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG991U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile Phone
Model(s):	SM-G991U
Additional Model(s):	SM-G991U1
Tx Frequency:	2499.3 - 2680.0: 5MHz+20MHz 2501.3 - 2682.5: 10MHz+15MHz 2501.5 - 2680.0: 10MHz+20MHz 2503.5 - 2684.7: 15MHz+10MHz 2503.5 - 2682.5: 15MHz+15MHz 2503.8 - 2680.0: 15MHz+20MHz 2506.0 - 2686.7: 20MHz+5MHz 2506.0 - 2684.5: 20MHz+10MHz 2506.0 - 2682.2: 20MHz+15MHz 2506.0 - 2680.0: 20MHz+20MHz
Date(s) of Tests:	September 23, 2020 ~ November 04, 2020
LTE CA :	CA 41C(Uplink)

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS, CDMA(BC0, 1, 10) and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (HT20/40/80), Bluetooth, BT LE, NFC, WPT, mmWave(n260/261).

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed NormalHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dB})}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and NormalHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

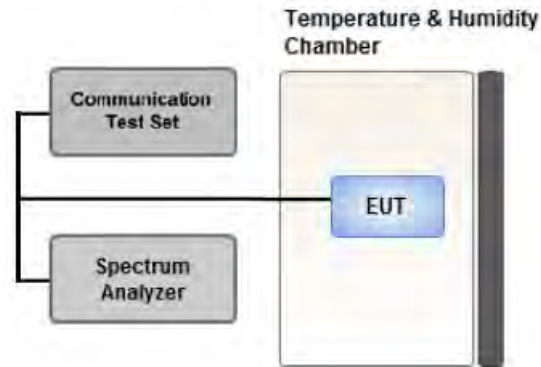

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.


1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:

Set $\geq [10 \times$ (number of points in sweep) \times (transmission period)] for single sweep
(automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25%.

3.5 OCCUPIED BANDWIDTH.

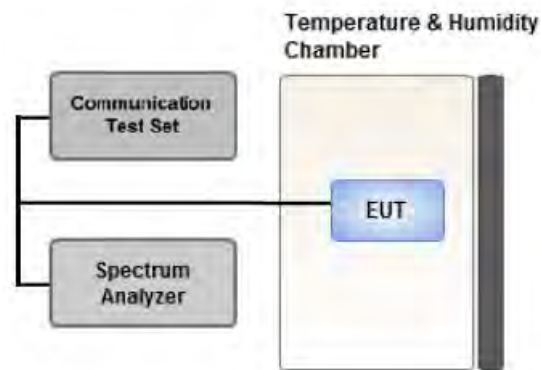

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

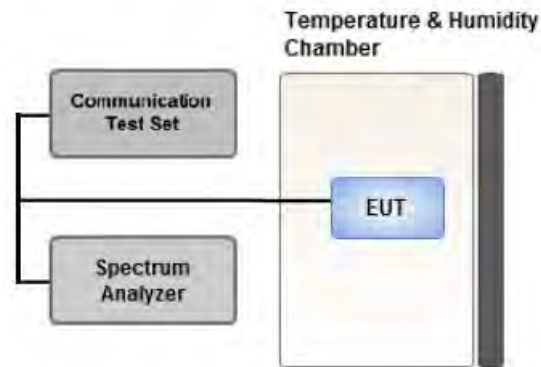

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 CHANNEL EDGE

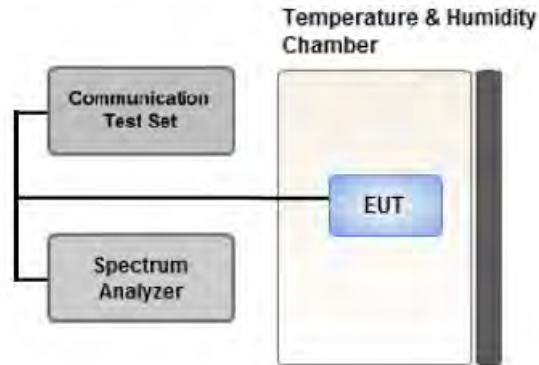

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1MHz of the channel edge the RBW should be 2% of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

1. The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2. $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3. $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz.
5. $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
6. X is the greater of 6MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

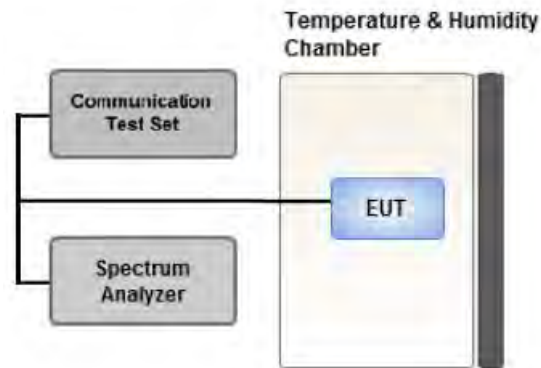

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/27/2020	Annual	04/27/2021
Hewlett Packard	E3632A/DC Power Supply	MY40004427	09/16/2020	Annual	09/16/2021
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93008124	03/18/2020	Annual	03/18/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	04/27/2020	Annual	04/27/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2020	Annual	06/04/2021
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2020	Annual	10/14/2021
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/26/2020	Annual	08/26/2021
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/26/2019	Biennial	04/26/2021
Schwarzbeck	VULB9160/ Bilog Antenna	3150	03/12/2019	Biennial	03/12/2021
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6262116770	07/22/2020	Annual	07/22/2021
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/22/2020	Annual	01/22/2021
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/13/2020	Annual	07/13/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/04/2020	Annual	06/04/2021
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).
- Model : FSV40/Spectrum
- Use date of equipment: September 23, 2020 ~ October 12, 2020, October 14, 2020 ~

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	<ul style="list-style-type: none"> ■ < 40 + 10log10 (P[Watts]) at Channel edges ■ < 43 + 10log10 (P[Watts]) between 5 and X MHz from Channel edges ■ < 55 + 10log10 (P[Watts]) beyond X MHz beyond from Channel edges ■ < 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz 	PASS
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. The same samples were used for SAR and EMC

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	< 55 + 10log10 (P[Watts])	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Note

1. All tests were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. Channel bandwidth is shown in the tables below based only on the channel bandwidths that were supported in this device.

Channel Bandwidth (PCC)	Channel Bandwidth (SCC)	Maximum aggregated bandwidth (MHz)
5	20	25
10	15	25
10	20	30
15	10	25
15	15	30
15	20	35
20	5	25
20	10	30
20	15	35
20	20	40

3. All modes of operation were investigated and the worst case configuration results are reported in this section.

Please refer to the table below.

- Worst case(Conducted Spurious Emissions, Channel Edge)
: We have selected higher of the Conduction Output Power.
- Worst case(Radiated Spurious Emissions) : We have selected higher of the EIRP.
- Worst case(OBW, PAR, Frequency stability)
: All modes of operation were investigated and the worst case configuration results are reported.

[Worst case_PC3]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
Conducted Spurious Emissions/ Channel Edge	16QAM	Low	5	2499.3	39683	1	24	20	2511.0	39800	1	0
	16QAM	Mid	15	2588.1	40571	1	74	10	2600.1	40691	1	0
	16QAM	High	15	2672.7	41417	1	74	10	2684.7	41537	1	0
	16QAM	Low	5	2499.3	39683	1	0	20	2511.0	39800	1	99
	16QAM	Mid	15	2588.1	40571	1	0	10	2600.1	40691	1	49
	16QAM	High	15	2672.7	41417	1	0	10	2684.7	41537	1	49
	QPSK	Low	20	2506.0	39750	100	0	15	2517.7	39921	75	0
	QPSK	Mid	20	2585.6	40546	100	0	15	2520.4	40717	75	0
	QPSK	High	20	2665.1	41341	100	0	15	2523.1	41512	75	0
	QPSK	Low	20	2506.0	39750	100	0	20	2525.8	39948	100	0
	QPSK	Mid	20	2583.1	40521	100	0	20	2602.9	40719	100	0
	QPSK	High	20	2660.2	41292	100	0	20	2680.0	41490	100	0
Radiated Spurious Emissions	16QAM	Low	20	2506.0	39750	1	99	10	2520.4	39894	1	0
	16QAM	Mid	10	2583.6	40526	1	49	20	2598.0	40670	1	0
	16QAM	High	15	2667.5	41365	1	74	15	2682.5	41515	1	0

[Worst case_PC3]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
OBW, PAR	QPSK, 16QAM, 64QAM, 256QAM	Mid	5	2583.8	40528	25	0	20	2595.5	40645	100	0
			10	2585.9	40549	50	0	15	2597.9	40669	75	0
			10	2583.6	40526	50	0	20	2598.0	40670	100	0
			15	2588.1	40571	75	0	10	2600.1	40691	50	0
			15	2585.5	40545	75	0	15	2600.5	40695	75	0
			15	2583.3	40523	75	0	20	2600.4	40694	100	0
			20	2590.5	40595	100	0	5	2602.2	40712	25	0
			20	2588.1	40571	100	0	10	2602.5	40715	50	0
			20	2585.6	40546	100	0	15	2602.7	40717	75	0
			20	2583.1	40521	100	0	20	2602.9	40719	100	0
Frequency stability	QPSK	Low	5	2499.3	39683	25	0	20	2511.0	39800	100	0
			10	2501.5	39705	50	0	20	2515.9	39849	100	0
			15	2503.8	39728	75	0	20	2520.9	39899	100	0
			20	2506.0	39750	100	0	20	2525.8	39948	100	0
		High	5	2668.3	41373	25	0	20	2680.0	41490	100	0
			10	2665.6	41346	50	0	20	2680.0	41490	100	0
			15	2662.9	41319	75	0	20	2680.0	41490	100	0
			20	2660.2	41292	100	0	20	2680.0	41490	100	0

[Worst case_PC2]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
Conducted Spurious Emissions/ Channel Edge	16QAM	Low	10	2501.3	39703	1	49	15	2513.3	39823	1	0
	16QAM	Mid	15	2585.5	40545	1	74	15	2600.5	40695	1	0
	16QAM	High	20	2675.0	41440	1	99	5	2686.7	41557	1	0
	16QAM	Low	10	2501.3	39703	1	0	15	2513.3	39823	1	74
	16QAM	Mid	15	2585.5	40545	1	0	15	2600.5	40695	1	74
	16QAM	High	20	2675.0	41440	1	0	5	2686.7	41557	1	24
	QPSK	Low	5	2499.3	39683	25	0	20	2511.0	39800	100	0
	QPSK	Mid	5	2583.8	40528	25	0	20	2595.5	40645	100	0
	QPSK	High	10	2670.5	41395	50	0	15	2682.5	41515	75	0
	QPSK	Low	20	2506.0	39750	100	0	20	2525.8	39948	100	0
	QPSK	Mid	20	2583.1	40521	100	0	20	2602.9	40719	100	0
	QPSK	High	20	2660.2	41292	100	0	20	2680.0	41490	100	0
Radiated Spurious Emissions	16QAM	Low	20	2506.0	39750	1	99	20	2525.8	39948	1	0
	16QAM	Mid	10	2583.6	40526	1	49	20	2598.0	40670	1	0
	16QAM	High	10	2670.5	41395	1	49	15	2682.5	41515	1	0

[Worst case_PC2]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
OBW, PAR	QPSK, 16QAM, 64QAM, 256QAM	Mid	5	2583.8	40528	25	0	20	2595.5	40645	100	0
			10	2585.9	40549	50	0	15	2597.9	40669	75	0
			10	2583.6	40526	50	0	20	2598.0	40670	100	0
			15	2588.1	40571	75	0	10	2600.1	40691	50	0
			15	2585.5	40545	75	0	15	2600.5	40695	75	0
			15	2583.3	40523	75	0	20	2600.4	40694	100	0
			20	2590.5	40595	100	0	5	2602.2	40712	25	0
			20	2588.1	40571	100	0	10	2602.5	40715	50	0
			20	2585.6	40546	100	0	15	2602.7	40717	75	0
			20	2583.1	40521	100	0	20	2602.9	40719	100	0
Frequency stability	QPSK	Low	5	2499.3	39683	25	0	20	2511.0	39800	100	0
			10	2501.5	39705	50	0	20	2515.9	39849	100	0
			15	2503.8	39728	75	0	20	2520.9	39899	100	0
			20	2506.0	39750	100	0	20	2525.8	39948	100	0
		High	5	2668.3	41373	25	0	20	2680.0	41490	100	0
			10	2665.6	41346	50	0	20	2680.0	41490	100	0
			15	2662.9	41319	75	0	20	2680.0	41490	100	0
			20	2660.2	41292	100	0	20	2680.0	41490	100	0

8.1 Conducted Power

8.1.1 PC3

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	2499.3	39683	1	24	20	2511.0	39800	1	0	23.84
	10	2501.3	39703	1	49	15	2513.3	39823	1	0	23.77
	10	2501.5	39705	1	49	20	2515.9	39849	1	0	23.76
	15	2503.5	39725	1	74	10	2515.5	39845	1	0	23.77
	15	2503.5	39725	1	74	15	2518.5	39875	1	0	23.66
	15	2503.8	39728	1	74	20	2520.9	39899	1	0	23.68
	20	2506.0	39750	1	99	5	2517.7	39867	1	0	23.47
	20	2506.0	39750	1	99	10	2520.4	39894	1	0	23.58
	20	2506.0	39750	1	99	15	2523.1	39921	1	0	23.55
	20	2506.0	39750	1	99	20	2525.8	39948	1	0	23.71
Mid	5	2583.8	40528	1	24	20	2595.5	40645	1	0	23.51
	10	2585.9	40549	1	49	15	2597.9	40669	1	0	23.60
	10	2583.6	40526	1	49	20	2598.0	40670	1	0	23.56
	15	2588.1	40571	1	74	10	2600.1	40691	1	0	23.61
	15	2585.5	40545	1	74	15	2600.5	40695	1	0	23.55
	15	2583.3	40523	1	74	20	2600.4	40694	1	0	23.58
	20	2590.5	40595	1	99	5	2602.2	40712	1	0	23.52
	20	2588.1	40571	1	99	10	2602.5	40715	1	0	23.55
	20	2585.6	40546	1	99	15	2602.7	40717	1	0	23.49
	20	2583.1	40521	1	99	20	2602.9	40719	1	0	23.55
High	5	2668.3	41373	1	24	20	2680.0	41490	1	0	23.51
	10	2670.5	41395	1	49	15	2682.5	41515	1	0	23.57
	10	2665.6	41346	1	49	20	2680.0	41490	1	0	23.46
	15	2672.7	41417	1	74	10	2684.7	41537	1	0	23.68
	15	2667.5	41365	1	74	15	2682.5	41515	1	0	23.57
	15	2662.9	41319	1	74	20	2680.0	41490	1	0	23.49
	20	2675.0	41440	1	99	5	2686.7	41557	1	0	23.62
	20	2670.1	41391	1	99	10	2684.5	41535	1	0	23.59
	20	2665.1	41341	1	99	15	2682.2	41512	1	0	23.49
	20	2660.2	41292	1	99	20	2680.0	41490	1	0	23.12

Note:

Modulation : QPSK(1RB)

Operating frequency	PCC					SCC					Conducted.
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Power [dBm]
Low	5	2499.3	39683	25	0	20	2511.0	39800	100	0	23.26
	10	2501.3	39703	50	0	15	2513.3	39823	75	0	23.26
	10	2501.5	39705	50	0	20	2515.9	39849	100	0	23.25
	15	2503.5	39725	75	0	10	2515.5	39845	50	0	23.24
	15	2503.5	39725	75	0	15	2518.5	39875	75	0	23.28
	15	2503.8	39728	75	0	20	2520.9	39899	100	0	23.23
	20	2506.0	39750	100	0	5	2517.7	39867	25	0	23.23
	20	2506.0	39750	100	0	10	2520.4	39894	50	0	23.23
	20	2506.0	39750	100	0	15	2523.1	39921	75	0	23.40
	20	2506.0	39750	100	0	20	2525.8	39948	100	0	23.15
Mid	5	2583.8	40528	25	0	20	2595.5	40645	100	0	22.87
	10	2585.9	40549	50	0	15	2597.9	40669	75	0	22.91
	10	2583.6	40526	50	0	20	2598.0	40670	100	0	22.89
	15	2588.1	40571	75	0	10	2600.1	40691	50	0	22.99
	15	2585.5	40545	75	0	15	2600.5	40695	75	0	22.87
	15	2583.3	40523	75	0	20	2600.4	40694	100	0	22.84
	20	2590.5	40595	100	0	5	2602.2	40712	25	0	22.99
	20	2588.1	40571	100	0	10	2602.5	40715	50	0	22.97
	20	2585.6	40546	100	0	15	2602.7	40717	75	0	23.41
	20	2583.1	40521	100	0	20	2602.9	40719	100	0	22.86
High	5	2668.3	41373	25	0	20	2680.0	41490	100	0	23.12
	10	2670.5	41395	50	0	15	2682.5	41515	75	0	23.15
	10	2665.6	41346	50	0	20	2680.0	41490	100	0	23.08
	15	2672.7	41417	75	0	10	2684.7	41537	50	0	23.18
	15	2667.5	41365	75	0	15	2682.5	41515	75	0	23.12
	15	2662.9	41319	75	0	20	2680.0	41490	100	0	23.01
	20	2675.0	41440	100	0	5	2686.7	41557	25	0	23.24
	20	2670.1	41391	100	0	10	2684.5	41535	50	0	23.20
	20	2665.1	41341	100	0	15	2682.2	41512	75	0	23.45
	20	2660.2	41292	100	0	20	2680.0	41490	100	0	23.05

Note:

Modulation : QPSK(Full RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	2499.3	39683	1	24	20	2511.0	39800	1	0	24.24
Mid	15	2588.1	40571	1	74	10	2600.1	40691	1	0	23.91
High	15	2672.7	41417	1	74	10	2684.7	41537	1	0	24.14
Low	20	2506.0	39750	100	0	15	2517.7	39921	75	0	23.38
Mid	20	2506.0	40546	100	0	15	2520.4	40717	75	0	23.35
High	20	2506.0	41341	100	0	15	2523.1	41512	75	0	23.39

Note:

Modulation : 16QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	2499.3	39683	1	24	20	2511.0	39800	1	0	23.30
Mid	15	2588.1	40571	1	74	10	2600.1	40691	1	0	22.71
High	15	2672.7	41417	1	74	10	2684.7	41537	1	0	23.01
Low	20	2506.0	39750	100	0	15	2517.7	39921	75	0	23.60
Mid	20	2506.0	40546	100	0	15	2520.4	40717	75	0	23.30
High	20	2506.0	41341	100	0	15	2523.1	41512	75	0	22.80

Note:

Modulation : 64QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	2499.3	39683	1	24	20	2511.0	39800	1	0	20.45
Mid	15	2588.1	40571	1	74	10	2600.1	40691	1	0	20.10
High	15	2672.7	41417	1	74	10	2684.7	41537	1	0	20.25
Low	20	2506.0	39750	100	0	15	2517.7	39921	75	0	22.49
Mid	20	2506.0	40546	100	0	15	2520.4	40717	75	0	23.03
High	20	2506.0	41341	100	0	15	2523.1	41512	75	0	21.69

Note:

Modulation : 256QAM

8.1.2 PC2

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	2499.3	39683	1	24	20	2511.0	39800	1	0	25.12
	10	2501.3	39703	1	49	15	2513.3	39823	1	0	27.13
	10	2501.5	39705	1	49	20	2515.9	39849	1	0	24.61
	15	2503.5	39725	1	74	10	2515.5	39845	1	0	27.05
	15	2503.5	39725	1	74	15	2518.5	39875	1	0	27.02
	15	2503.8	39728	1	74	20	2520.9	39899	1	0	27.01
	20	2506.0	39750	1	99	5	2517.7	39867	1	0	26.88
	20	2506.0	39750	1	99	10	2520.4	39894	1	0	26.78
	20	2506.0	39750	1	99	15	2523.1	39921	1	0	27.01
	20	2506.0	39750	1	99	20	2525.8	39948	1	0	26.98
Mid	5	2583.8	40528	1	24	20	2595.5	40645	1	0	26.41
	10	2585.9	40549	1	49	15	2597.9	40669	1	0	26.60
	10	2583.6	40526	1	49	20	2598.0	40670	1	0	26.54
	15	2588.1	40571	1	74	10	2600.1	40691	1	0	26.60
	15	2585.5	40545	1	74	15	2600.5	40695	1	0	26.70
	15	2583.3	40523	1	74	20	2600.4	40694	1	0	26.55
	20	2590.5	40595	1	99	5	2602.2	40712	1	0	26.69
	20	2588.1	40571	1	99	10	2602.5	40715	1	0	26.65
	20	2585.6	40546	1	99	15	2602.7	40717	1	0	26.62
	20	2583.1	40521	1	99	20	2602.9	40719	1	0	26.66
High	5	2668.3	41373	1	24	20	2680.0	41490	1	0	26.24
	10	2670.5	41395	1	49	15	2682.5	41515	1	0	26.40
	10	2665.6	41346	1	49	20	2680.0	41490	1	0	26.21
	15	2672.7	41417	1	74	10	2684.7	41537	1	0	26.48
	15	2667.5	41365	1	74	15	2682.5	41515	1	0	26.35
	15	2662.9	41319	1	74	20	2680.0	41490	1	0	26.21
	20	2675.0	41440	1	99	5	2686.7	41557	1	0	26.87
	20	2670.1	41391	1	99	10	2684.5	41535	1	0	26.73
	20	2665.1	41341	1	99	15	2682.2	41512	1	0	26.64
	20	2660.2	41292	1	99	20	2680.0	41490	1	0	26.22

Note:

Modulation : QPSK(1RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	2499.3	39683	25	0	20	2511.0	39800	100	0	25.07
	10	2501.3	39703	50	0	15	2513.3	39823	75	0	24.96
	10	2501.5	39705	50	0	20	2515.9	39849	100	0	24.60
	15	2503.5	39725	75	0	10	2515.5	39845	50	0	24.79
	15	2503.5	39725	75	0	15	2518.5	39875	75	0	24.59
	15	2503.8	39728	75	0	20	2520.9	39899	100	0	24.84
	20	2506.0	39750	100	0	5	2517.7	39867	25	0	24.65
	20	2506.0	39750	100	0	10	2520.4	39894	50	0	24.55
	20	2506.0	39750	100	0	15	2523.1	39921	75	0	24.76
	20	2506.0	39750	100	0	20	2525.8	39948	100	0	25.03
Mid	5	2583.8	40528	25	0	20	2595.5	40645	100	0	25.35
	10	2585.9	40549	50	0	15	2597.9	40669	75	0	25.21
	10	2583.6	40526	50	0	20	2598.0	40670	100	0	25.16
	15	2588.1	40571	75	0	10	2600.1	40691	50	0	25.28
	15	2585.5	40545	75	0	15	2600.5	40695	75	0	24.86
	15	2583.3	40523	75	0	20	2600.4	40694	100	0	24.93
	20	2590.5	40595	100	0	5	2602.2	40712	25	0	25.21
	20	2588.1	40571	100	0	10	2602.5	40715	50	0	25.00
	20	2585.6	40546	100	0	15	2602.7	40717	75	0	25.09
	20	2583.1	40521	100	0	20	2602.9	40719	100	0	24.58
High	5	2668.3	41373	25	0	20	2680.0	41490	100	0	23.68
	10	2670.5	41395	50	0	15	2682.5	41515	75	0	23.90
	10	2665.6	41346	50	0	20	2680.0	41490	100	0	23.66
	15	2672.7	41417	75	0	10	2684.7	41537	50	0	23.76
	15	2667.5	41365	75	0	15	2682.5	41515	75	0	23.13
	15	2662.9	41319	75	0	20	2680.0	41490	100	0	23.46
	20	2675.0	41440	100	0	5	2686.7	41557	25	0	23.69
	20	2670.1	41391	100	0	10	2684.5	41535	50	0	23.35
	20	2665.1	41341	100	0	15	2682.2	41512	75	0	23.83
	20	2660.2	41292	100	0	20	2680.0	41490	100	0	23.28

Note:

Modulation : QPSK(Full RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	10	2501.3	39703	1	49	15	2513.3	39823	1	0	25.99
Mid	15	2585.5	40545	1	74	15	2600.5	40695	1	0	25.47
High	20	2675.0	41440	1	99	5	2686.7	41557	1	0	26.01
Low	5	2499.3	39683	25	0	20	2511.0	39800	100	0	23.95
Mid	5	2583.8	40528	25	0	20	2595.5	40645	100	0	24.40
High	10	2670.5	41395	50	0	15	2682.5	41515	75	0	23.13

Note:

Modulation : 16QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	10	2501.3	39703	1	49	15	2513.3	39823	1	0	23.12
Mid	15	2585.5	40545	1	74	15	2600.5	40695	1	0	22.55
High	20	2675.0	41440	1	99	5	2686.7	41557	1	0	23.76
Low	5	2499.3	39683	25	0	20	2511.0	39800	100	0	23.06
Mid	5	2583.8	40528	25	0	20	2595.5	40645	100	0	23.41
High	10	2670.5	41395	50	0	15	2682.5	41515	75	0	22.15

Note:

Modulation : 64QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	10	2501.3	39703	1	49	15	2513.3	39823	1	0	22.15
Mid	15	2585.5	40545	1	74	15	2600.5	40695	1	0	21.31
High	20	2675.0	41440	1	99	5	2686.7	41557	1	0	22.77
Low	5	2499.3	39683	25	0	20	2511.0	39800	100	0	21.85
Mid	5	2583.8	40528	25	0	20	2595.5	40645	100	0	22.50
High	10	2670.5	41395	50	0	15	2682.5	41515	75	0	21.22

Note:

Modulation : 256QAM

8.2 Equivalent Isotropic Radiated Power

8.2.1 PC3

	PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
	BW [MHz]	Channel	RB/ Offset	BW [MHz]	Channel	RB/ Offset						W	dBm
Low	5	39683	25/0	20	39800	100/0	-21.50	15.63	10.75	2.32	H	0.25	24.06
	10	39703	50/0	15	39823	75/0	-21.47	15.66	10.75	2.32	H	0.26	24.09
	10	39705	50/0	20	39849	100/0	-21.48	15.65	10.75	2.32	H	0.26	24.08
	15	39725	75/0	10	39845	50/0	-21.84	15.29	10.75	2.32	H	0.24	23.72
	15	39725	75/0	15	39875	75/0	-21.91	15.22	10.75	2.32	H	0.23	23.65
	15	39728	75/0	20	39899	100/0	-21.78	15.35	10.75	2.32	H	0.24	23.78
	20	39750	100/0	5	39867	25/0	-21.62	15.51	10.75	2.32	H	0.25	23.94
	20	39750	100/0	10	39894	50/0	-21.44	15.69	10.75	2.32	H	0.26	24.12
	20	39750	100/0	15	39921	75/0	-21.70	15.43	10.75	2.32	H	0.24	23.86
	20	39750	100/0	20	39948	100/0	-21.64	15.49	10.75	2.32	H	0.25	23.92
Mid	5	40528	25/0	20	40645	100/0	-21.23	15.92	10.98	2.35	H	0.28	24.55
	10	40549	50/0	15	40669	75/0	-21.02	16.13	10.98	2.35	H	0.30	24.76
	10	40526	50/0	20	40670	100/0	-21.07	16.08	10.98	2.35	H	0.30	24.71
	15	40571	75/0	10	40691	50/0	-21.14	16.01	10.98	2.35	H	0.29	24.64
	15	40545	75/0	15	40695	75/0	-21.31	15.84	10.98	2.35	H	0.28	24.47
	15	40523	75/0	20	40694	100/0	-21.14	16.01	10.98	2.35	H	0.29	24.64
	20	40595	100/0	5	40712	25/0	-21.55	15.60	10.98	2.35	H	0.26	24.23
	20	40571	100/0	10	40715	50/0	-21.30	15.85	10.98	2.35	H	0.28	24.48
	20	40546	100/0	15	40717	75/0	-21.20	15.95	10.98	2.35	H	0.29	24.58
	20	40521	100/0	20	40719	100/0	-21.12	16.03	10.98	2.35	H	0.29	24.66
High	5	41373	25/0	20	41490	100/0	-24.40	13.04	11.10	2.39	H	0.15	21.76
	10	41395	50/0	15	41515	75/0	-24.24	13.20	11.10	2.39	H	0.16	21.92
	10	41346	50/0	20	41490	100/0	-24.23	13.21	11.10	2.39	H	0.16	21.93
	15	41417	75/0	10	41537	50/0	-24.55	12.89	11.10	2.39	H	0.14	21.61
	15	41365	75/0	15	41515	75/0	-24.11	13.33	11.10	2.39	H	0.16	22.05
	15	41319	75/0	20	41490	100/0	-24.35	13.09	11.10	2.39	H	0.15	21.81
	20	41440	100/0	5	41557	25/0	-24.27	13.17	11.10	2.39	H	0.15	21.89
	20	41391	100/0	10	41535	50/0	-24.69	12.75	11.10	2.39	H	0.14	21.47
	20	41341	100/0	15	41512	75/0	-24.23	13.21	11.10	2.39	H	0.16	21.93
	20	41292	100/0	20	41490	100/0	-24.33	13.11	11.10	2.39	H	0.15	21.83

Note:

1. Modulation : QPSK
2. Limit : < 2 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
20	39750	100/0	10	39894	50/0	-21.40	15.73	10.75	2.32	H	0.26	24.16
5	40528	25/0	20	40645	100/0	-20.87	16.28	10.98	2.35	H	0.31	24.91
10	40549	50/0	15	40669	75/0	-20.67	16.48	10.98	2.35	H	0.32	25.11
10	40526	50/0	20	40670	100/0	-20.58	16.57	10.98	2.35	H	0.33	25.20
15	40571	75/0	10	40691	50/0	-20.68	16.47	10.98	2.35	H	0.32	25.10
15	40545	75/0	15	40695	75/0	-20.94	16.21	10.98	2.35	H	0.30	24.84
15	40523	75/0	20	40694	100/0	-20.78	16.37	10.98	2.35	H	0.32	25.00
20	40595	100/0	5	40712	25/0	-21.42	15.73	10.98	2.35	H	0.27	24.36
20	40571	100/0	10	40715	50/0	-20.97	16.18	10.98	2.35	H	0.30	24.81
20	40546	100/0	15	40717	75/0	-20.66	16.49	10.98	2.35	H	0.32	25.12
20	40521	100/0	20	40719	100/0	-20.82	16.33	10.98	2.35	H	0.31	24.96
15	41365	75/0	15	41515	75/0	-23.92	13.52	11.10	2.39	H	0.17	22.24

Note:

1. Modulation : 16QAM
2. Limit : < 2 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
20	39750	100/0	10	39894	50/0	-21.99	15.14	10.75	2.32	H	0.23	23.57
5	40528	25/0	20	40645	100/0	-21.58	15.57	10.98	2.35	H	0.26	24.20
10	40549	50/0	15	40669	75/0	-22.62	14.53	10.98	2.35	H	0.21	23.16
10	40526	50/0	20	40670	100/0	-22.45	14.70	10.98	2.35	H	0.22	23.33
15	40571	75/0	10	40691	50/0	-22.59	14.56	10.98	2.35	H	0.21	23.19
15	40545	75/0	15	40695	75/0	-22.53	14.62	10.98	2.35	H	0.21	23.25
15	40523	75/0	20	40694	100/0	-22.56	14.59	10.98	2.35	H	0.21	23.22
20	40595	100/0	5	40712	25/0	-21.62	15.53	10.98	2.35	H	0.26	24.16
20	40571	100/0	10	40715	50/0	-22.06	15.09	10.98	2.35	H	0.24	23.72
20	40546	100/0	15	40717	75/0	-21.66	15.49	10.98	2.35	H	0.26	24.12
20	40521	100/0	20	40719	100/0	-22.53	14.62	10.98	2.35	H	0.21	23.25
15	41365	75/0	15	41515	75/0	-25.26	12.18	11.10	2.39	H	0.12	20.90

Note:

1. Modulation : 64QAM
2. Limit : < 2 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
20	39750	100/0	10	39894	50/0	-24.97	11.74	10.75	2.32	H	0.10	20.17
5	40528	25/0	20	40645	100/0	-24.64	12.15	10.98	2.35	H	0.12	20.78
10	40549	50/0	15	40669	75/0	-24.26	12.53	10.98	2.35	H	0.13	21.16
10	40526	50/0	20	40670	100/0	-24.14	12.65	10.98	2.35	H	0.13	21.28
15	40571	75/0	10	40691	50/0	-24.16	12.63	10.98	2.35	H	0.13	21.26
15	40545	75/0	15	40695	75/0	-24.39	12.40	10.98	2.35	H	0.13	21.03
15	40523	75/0	20	40694	100/0	-24.40	12.39	10.98	2.35	H	0.13	21.02
20	40595	100/0	5	40712	25/0	-24.75	12.04	10.98	2.35	H	0.12	20.67
20	40571	100/0	10	40715	50/0	-24.60	12.19	10.98	2.35	H	0.12	20.82
20	40546	100/0	15	40717	75/0	-22.54	14.25	10.98	2.35	H	0.19	22.88
20	40521	100/0	20	40719	100/0	-24.35	12.44	10.98	2.35	H	0.13	21.07
15	41365	75/0	15	41515	75/0	-27.56	9.42	11.10	2.39	H	0.07	18.14

Note:

1. Modulation : 256QAM
2. Limit : < 2 Watts

8.2.2 PC2

	PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
	BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
Low	5	39683	25/0	20	39800	100/0	-21.83	15.30	10.75	2.32	H	0.24	23.73
	10	39703	50/0	15	39823	75/0	-20.20	16.93	10.75	2.32	H	0.34	25.36
	10	39705	50/0	20	39849	100/0	-22.44	14.69	10.75	2.32	H	0.21	23.12
	15	39725	75/0	10	39845	50/0	-20.25	16.88	10.75	2.32	H	0.34	25.31
	15	39725	75/0	15	39875	75/0	-20.30	16.83	10.75	2.32	H	0.34	25.26
	15	39728	75/0	20	39899	100/0	-20.13	17.00	10.75	2.32	H	0.35	25.43
	20	39750	100/0	5	39867	25/0	-19.74	17.39	10.75	2.32	H	0.38	25.82
	20	39750	100/0	10	39894	50/0	-19.76	17.37	10.75	2.32	H	0.38	25.80
	20	39750	100/0	15	39921	75/0	-19.79	17.34	10.75	2.32	H	0.38	25.77
	20	39750	100/0	20	39948	100/0	-19.63	17.50	10.75	2.32	H	0.39	25.93
Mid	5	40528	25/0	20	40645	100/0	-19.95	17.20	10.98	2.35	H	0.38	25.83
	10	40549	50/0	15	40669	75/0	-20.07	17.08	10.98	2.35	H	0.37	25.71
	10	40526	50/0	20	40670	100/0	-19.74	17.41	10.98	2.35	H	0.40	26.04
	15	40571	75/0	10	40691	50/0	-19.89	17.26	10.98	2.35	H	0.39	25.89
	15	40545	75/0	15	40695	75/0	-19.83	17.32	10.98	2.35	H	0.39	25.95
	15	40523	75/0	20	40694	100/0	-19.86	17.29	10.98	2.35	H	0.39	25.92
	20	40595	100/0	5	40712	25/0	-20.30	16.85	10.98	2.35	H	0.35	25.48
	20	40571	100/0	10	40715	50/0	-19.95	17.20	10.98	2.35	H	0.38	25.83
	20	40546	100/0	15	40717	75/0	-19.89	17.26	10.98	2.35	H	0.39	25.89
	20	40521	100/0	20	40719	100/0	-19.86	17.29	10.98	2.35	H	0.39	25.92
High	5	41373	25/0	20	41490	100/0	-23.10	14.34	11.10	2.39	H	0.20	23.06
	10	41395	50/0	15	41515	75/0	-22.66	14.78	11.10	2.39	H	0.22	23.50
	10	41346	50/0	20	41490	100/0	-22.84	14.60	11.10	2.39	H	0.21	23.32
	15	41417	75/0	10	41537	50/0	-23.35	14.09	11.10	2.39	H	0.19	22.81
	15	41365	75/0	15	41515	75/0	-22.86	14.58	11.10	2.39	H	0.21	23.30
	15	41319	75/0	20	41490	100/0	-22.94	14.50	11.10	2.39	H	0.21	23.22
	20	41440	100/0	5	41557	25/0	-23.22	14.22	11.10	2.39	H	0.20	22.94
	20	41391	100/0	10	41535	50/0	-22.80	14.64	11.10	2.39	H	0.22	23.36
	20	41341	100/0	15	41512	75/0	-22.79	14.65	11.10	2.39	H	0.22	23.37
	20	41292	100/0	20	41490	100/0	-22.94	14.50	11.10	2.39	H	0.21	23.22

Note:

1. Modulation : QPSK
2. Limit : < 2 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
20	39750	100/0	20	39948	100/0	-20.65	16.48	10.75	2.32	H	0.31	24.91
5	40528	25/0	20	40645	100/0	-20.95	16.20	10.98	2.35	H	0.30	24.83
10	40549	50/0	15	40669	75/0	-20.91	16.24	10.98	2.35	H	0.31	24.87
10	40526	50/0	20	40670	100/0	-20.70	16.45	10.98	2.35	H	0.32	25.08
15	40571	75/0	10	40691	50/0	-20.77	16.38	10.98	2.35	H	0.32	25.01
15	40545	75/0	15	40695	75/0	-20.92	16.23	10.98	2.35	H	0.31	24.86
15	40523	75/0	20	40694	100/0	-20.74	16.41	10.98	2.35	H	0.32	25.04
20	40595	100/0	5	40712	25/0	-21.35	15.80	10.98	2.35	H	0.28	24.43
20	40571	100/0	10	40715	50/0	-21.04	16.11	10.98	2.35	H	0.30	24.74
20	40546	100/0	15	40717	75/0	-20.77	16.38	10.98	2.35	H	0.32	25.01
20	40521	100/0	20	40719	100/0	-21.00	16.15	10.98	2.35	H	0.30	24.78
10	41395	50/0	15	41515	75/0	-23.57	13.87	11.10	2.39	H	0.18	22.59

Note:

1. Modulation : 16QAM
2. Limit : < 2 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
20	39750	100/0	20	39948	100/0	-23.23	13.90	10.75	2.32	H	0.17	22.33
5	40528	25/0	20	40645	100/0	-23.53	13.62	10.98	2.35	H	0.17	22.25
10	40549	50/0	15	40669	75/0	-23.75	13.40	10.98	2.35	H	0.16	22.03
10	40526	50/0	20	40670	100/0	-23.33	13.82	10.98	2.35	H	0.18	22.45
15	40571	75/0	10	40691	50/0	-23.54	13.61	10.98	2.35	H	0.17	22.24
15	40545	75/0	15	40695	75/0	-23.76	13.39	10.98	2.35	H	0.16	22.02
15	40523	75/0	20	40694	100/0	-23.37	13.78	10.98	2.35	H	0.17	22.41
20	40595	100/0	5	40712	25/0	-24.20	12.95	10.98	2.35	H	0.14	21.58
20	40571	100/0	10	40715	50/0	-23.61	13.54	10.98	2.35	H	0.16	22.17
20	40546	100/0	15	40717	75/0	-23.37	13.78	10.98	2.35	H	0.17	22.41
20	40521	100/0	20	40719	100/0	-23.58	13.57	10.98	2.35	H	0.17	22.20
10	41395	50/0	15	41515	75/0	-26.00	11.44	11.10	2.39	H	0.10	20.16

Note:

1. Modulation : 64QAM
2. Limit : < 2 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
20	39750	100/0	20	39948	100/0	-24.08	12.63	10.75	2.32	H	0.13	21.06
5	40528	25/0	20	40645	100/0	-24.62	12.17	10.98	2.35	H	0.12	20.80
10	40549	50/0	15	40669	75/0	-24.64	12.15	10.98	2.35	H	0.12	20.78
10	40526	50/0	20	40670	100/0	-24.54	12.25	10.98	2.35	H	0.12	20.88
15	40571	75/0	10	40691	50/0	-24.63	12.16	10.98	2.35	H	0.12	20.79
15	40545	75/0	15	40695	75/0	-24.65	12.14	10.98	2.35	H	0.12	20.77
15	40523	75/0	20	40694	100/0	-24.56	12.23	10.98	2.35	H	0.12	20.86
20	40595	100/0	5	40712	25/0	-25.10	11.69	10.98	2.35	H	0.11	20.32
20	40571	100/0	10	40715	50/0	-24.55	12.24	10.98	2.35	H	0.12	20.87
20	40546	100/0	15	40717	75/0	-24.20	12.59	10.98	2.35	H	0.13	21.22
20	40521	100/0	20	40719	100/0	-24.55	12.24	10.98	2.35	H	0.12	20.87
10	41395	50/0	15	41515	75/0	-27.04	9.94	11.10	2.39	H	0.07	18.66

Note:

1. Modulation : 256QAM
2. Limit : < 2 Watts

8.3 Conducted Spurious Emissions

8.3.1 PC3

Operating frequency	PCC				SCC				Measurement	Factor (dB)	Measurement	Result (dBm)
	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	Maximum Frequency (GHz)		Maximum Data (dBm)	
Low	5	39683	2499.3	1/24	20	39800	2511.0	1/0	8.5848	28.591	-60.63	-32.04
Mid	15	40571	2588.1	1/74	10	40691	2600.1	1/0	9.1341	28.591	-60.39	-31.80
High	15	41417	2672.7	1/74	10	41537	2684.7	1/0	3.7757	27.976	-60.03	-32.05
Low	5	39683	2499.3	1/0	20	39800	2511.0	1/99	3.7428	27.976	-60.67	-32.69
Mid	15	40571	2588.1	1/0	10	40691	2600.1	1/49	4.0135	27.976	-61.06	-33.09
High	15	41417	2672.7	1/0	10	41537	2684.7	1/49	3.8445	27.976	-60.54	-32.56
Low	20	39750	2506.0	100/0	15	39921	2517.7	75/0	3.9826	27.976	-61.13	-33.15
Mid	20	40546	2585.6	100/0	15	40717	2520.4	75/0	4.9462	27.976	-60.87	-32.89
High	20	41341	2665.1	100/0	15	41512	2523.1	75/0	7.1436	28.591	-60.23	-31.64
Low	20	39750	2506.0	100/0	20	39948	2525.8	100/0	4.0564	27.976	-60.25	-32.27
Mid	20	40521	2583.1	100/0	20	40719	2602.9	100/0	9.8679	28.591	-60.64	-32.05
High	20	41292	2660.2	100/0	20	41490	2680.0	100/0	9.9332	28.591	-61.14	-32.55

Note:


1. Modulation : 16QAM, QPSK
2. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter
3. Factors for frequency :

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


4. Limit : -25.0 dBm

Frequency Range : 30MHz ~ 10GHz


PCC 5MHz Ch39683 RB1 Offset0 SCC 20MHz Ch39800 RB1 Offset99

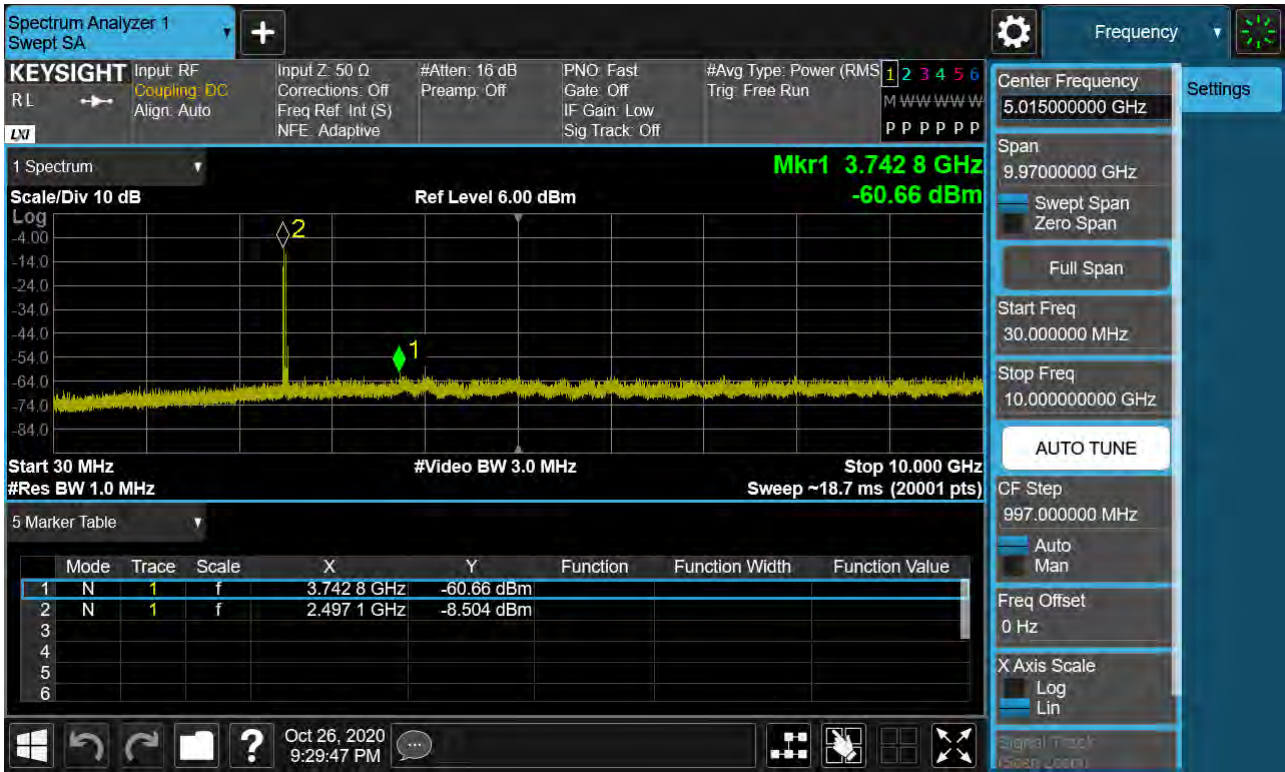


PCC 5MHz Ch39683 RB1 Offset24 SCC 20MHz Ch39800 RB1 Offset0

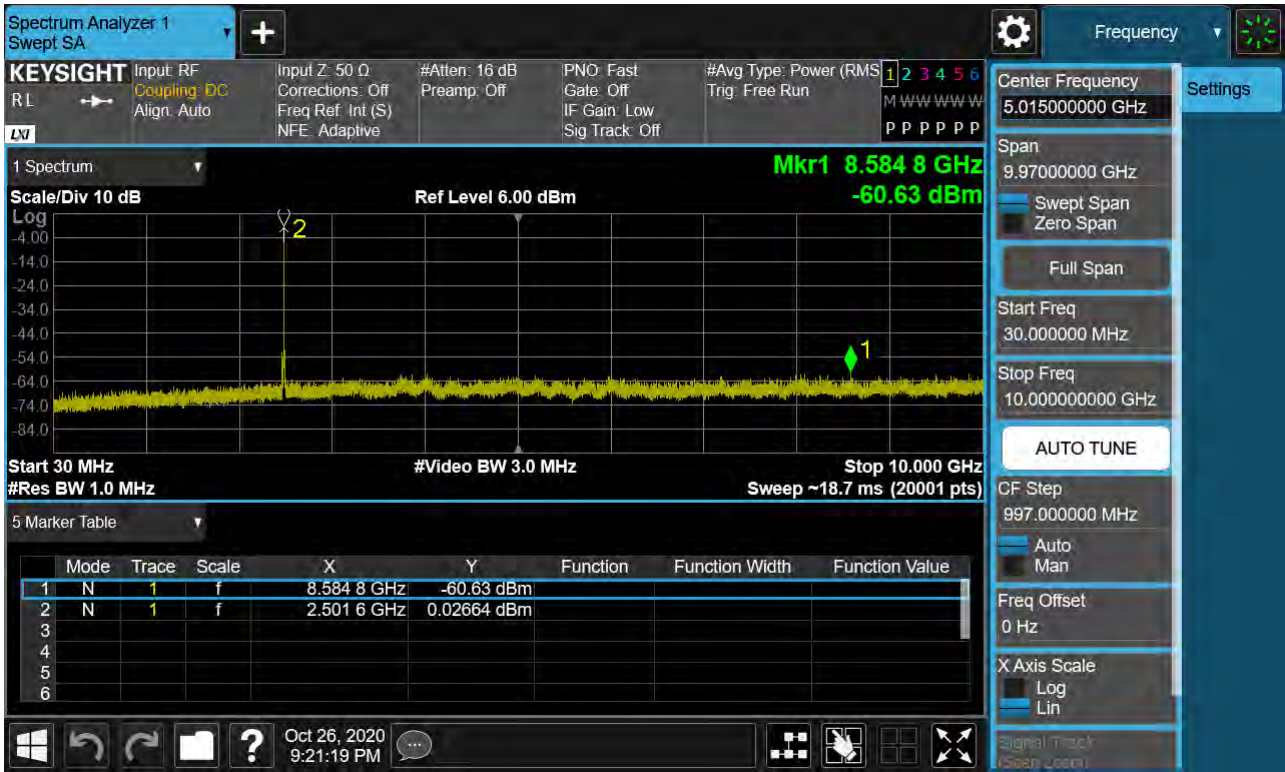


PCC 15MHz Ch40571 RB1 Offset0 SCC 10MHz Ch40691 RB1 Offset49

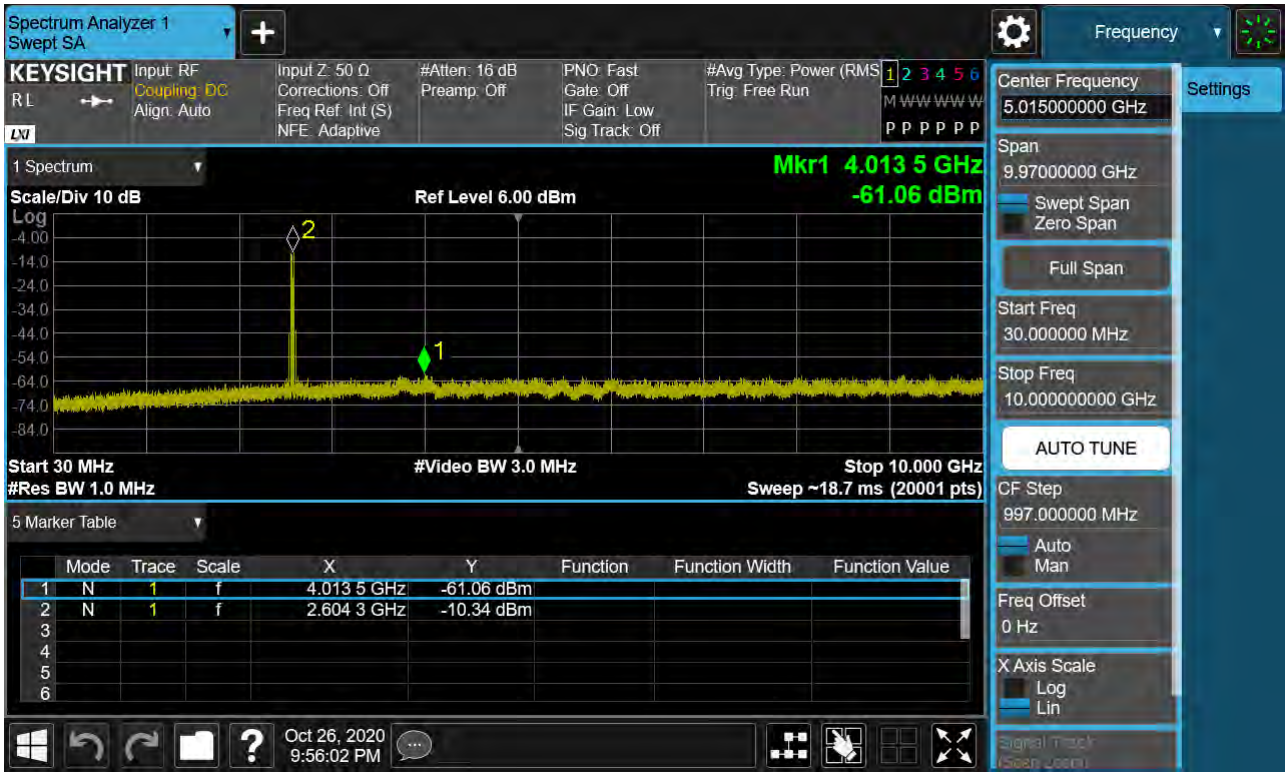


PCC 15MHz Ch40571 RB1 Offset74 SCC 10MHz Ch40691 RB1 Offset0

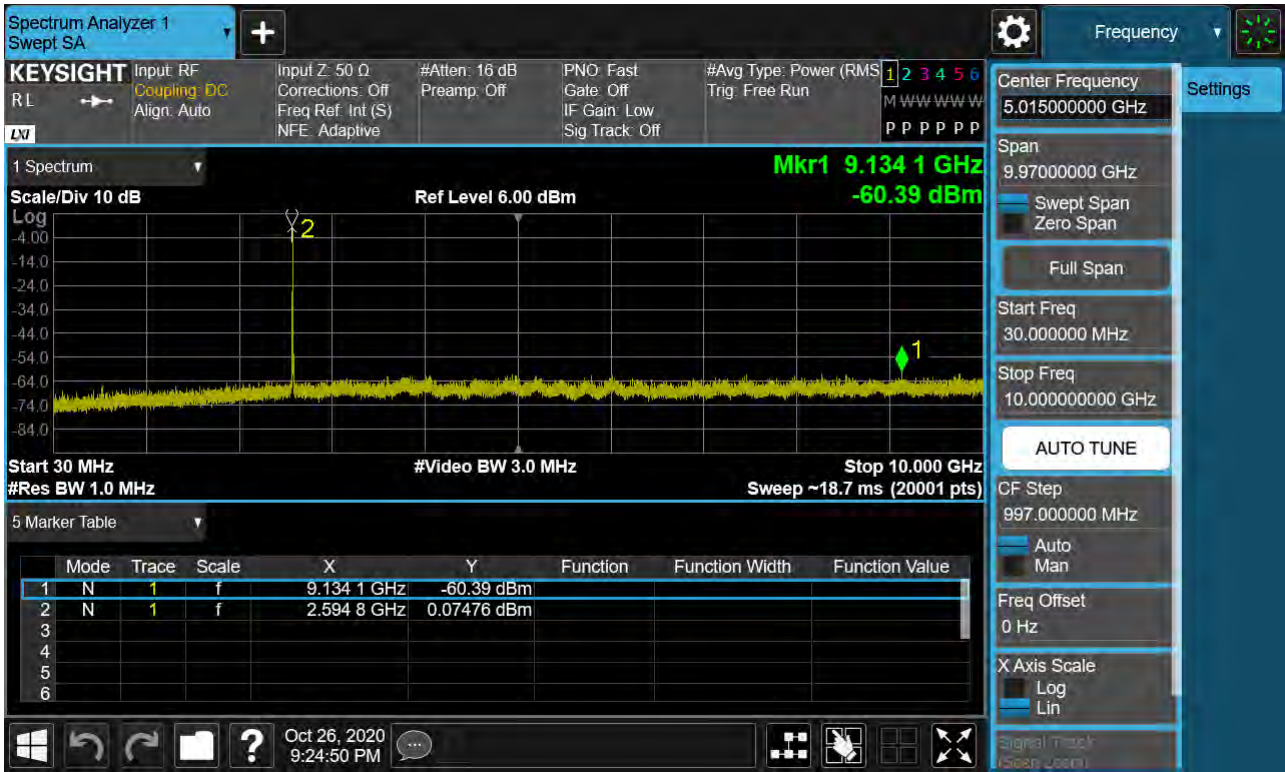


PCC 15MHz Ch41417 RB1 Offset0 SCC 10MHz Ch41537 RB1 Offset49

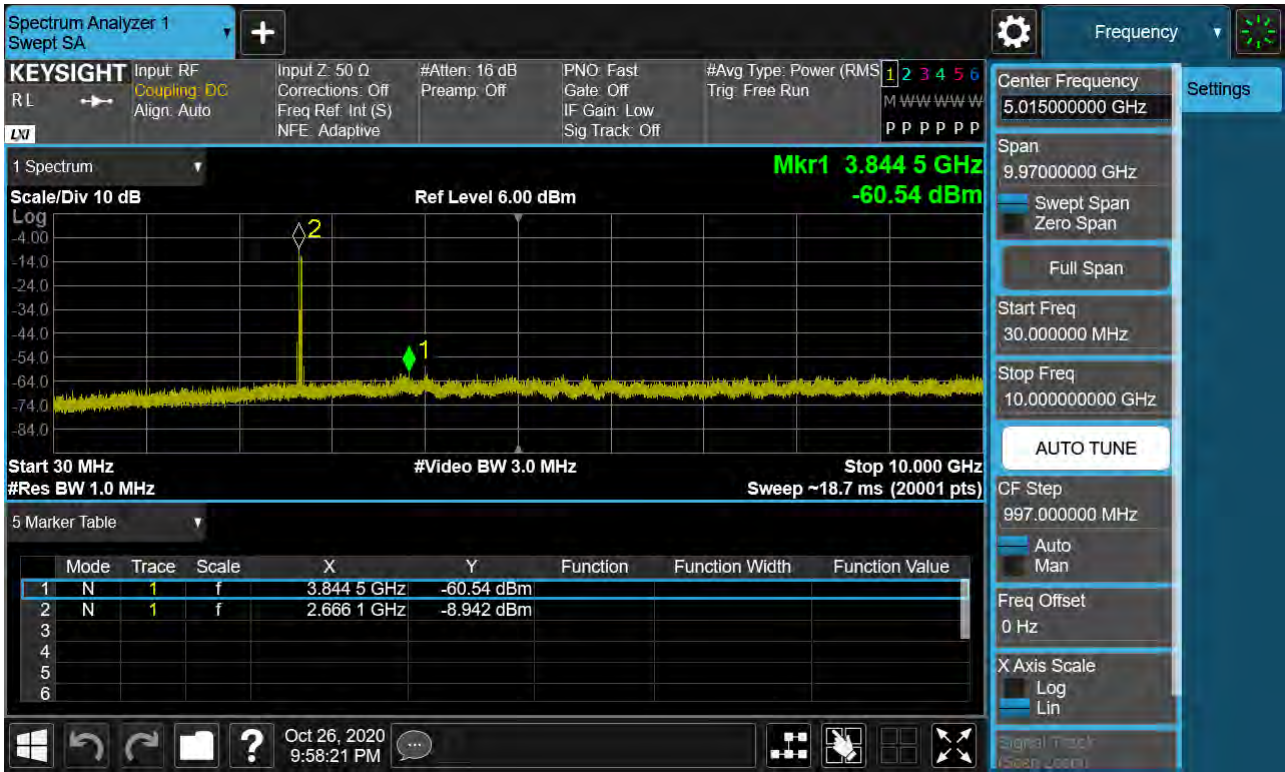


PCC 15MHz Ch41417 RB1 Offset74 SCC 10MHz Ch41537 RB1 Offset0

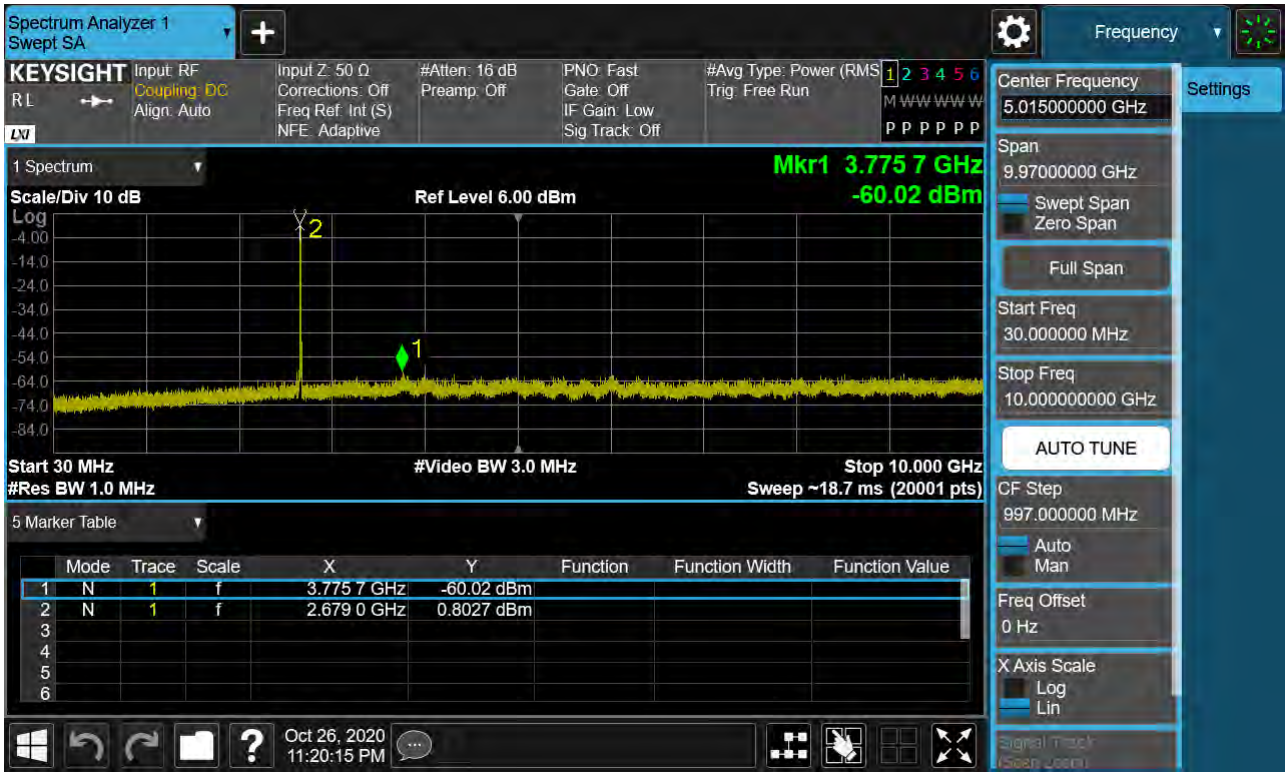


PCC 20MHz Ch39750 RB100 Offset0 SCC 15MHz Ch39921 RB75 Offset0

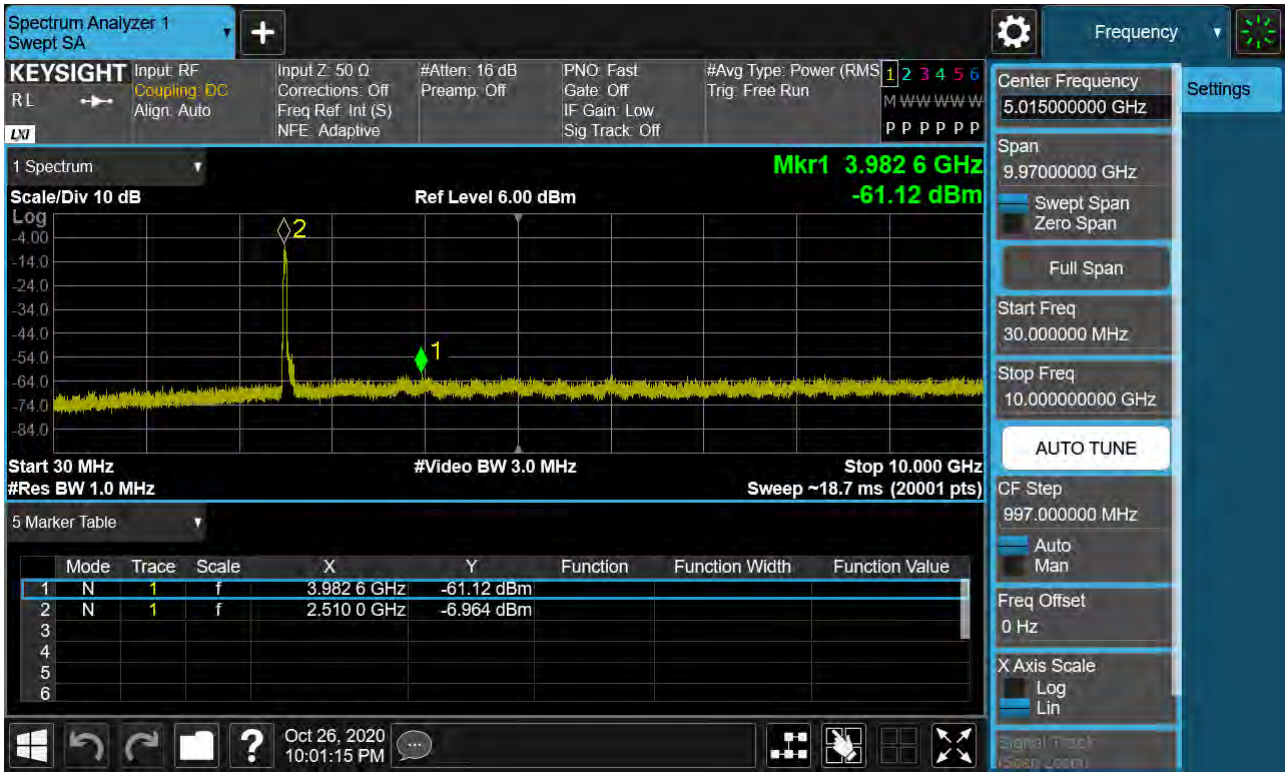


PCC 20MHz Ch39750 RB100 Offset0 SCC 20MHz Ch39948 RB100 Offset0

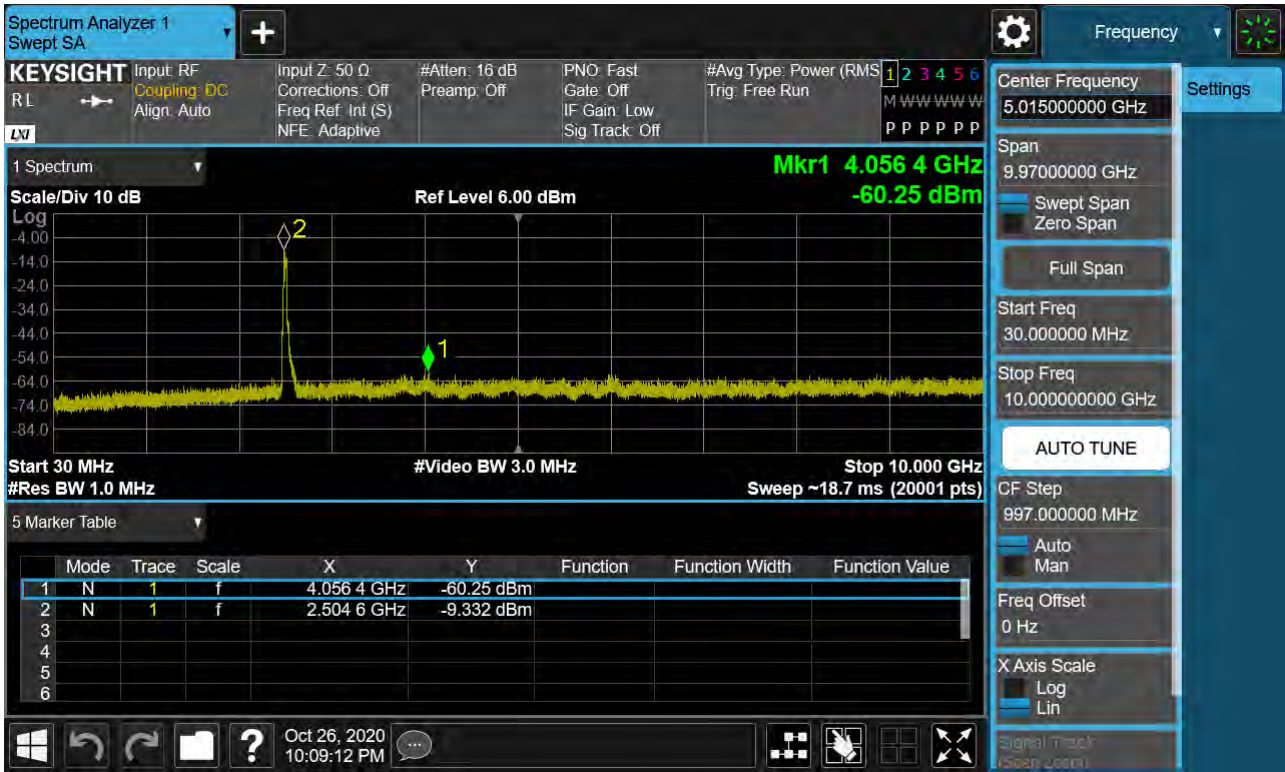


PCC 20MHz Ch40521 RB100 Offset0 SCC 20MHz Ch40719 RB100 Offset0

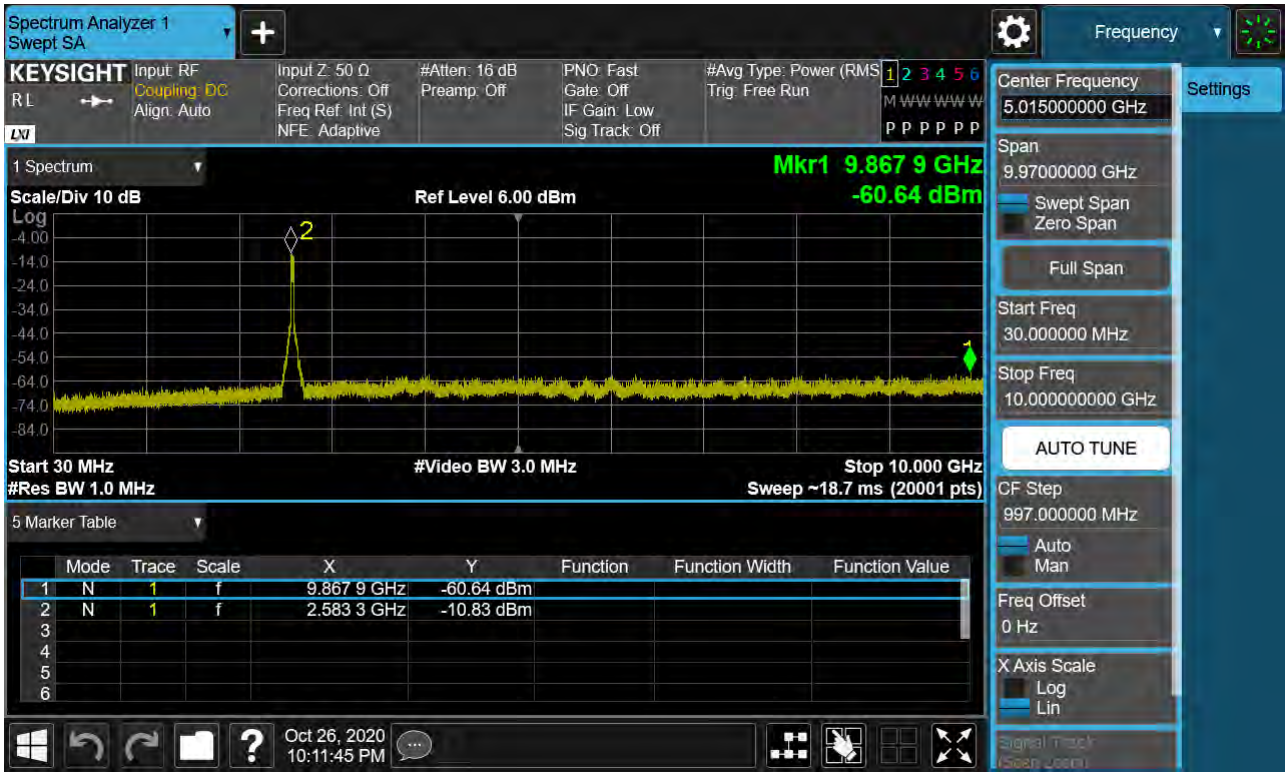


PCC 20MHz Ch40546 RB100 Offset0 SCC 15MHz Ch40717 RB75 Offset0

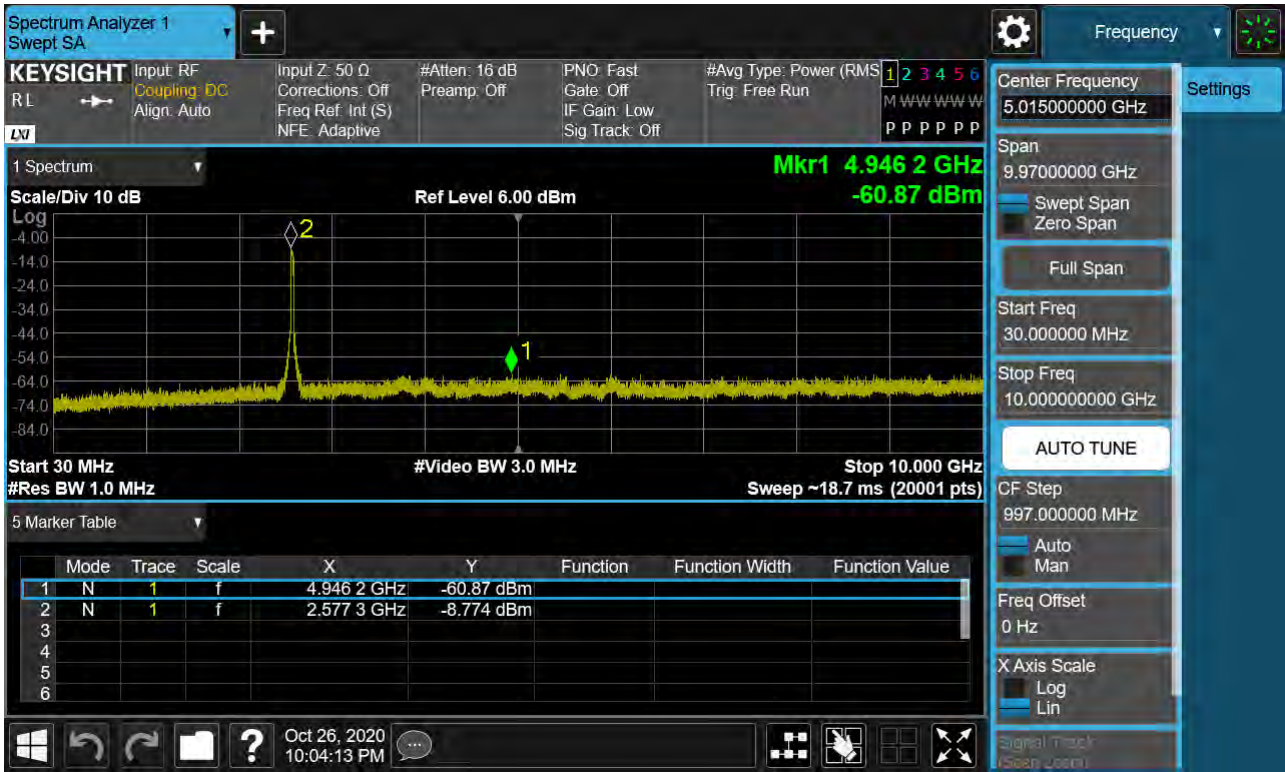

PCC 20MHz Ch41292 RB100 Offset0 SCC 20MHz Ch41490 RB100 Offset0

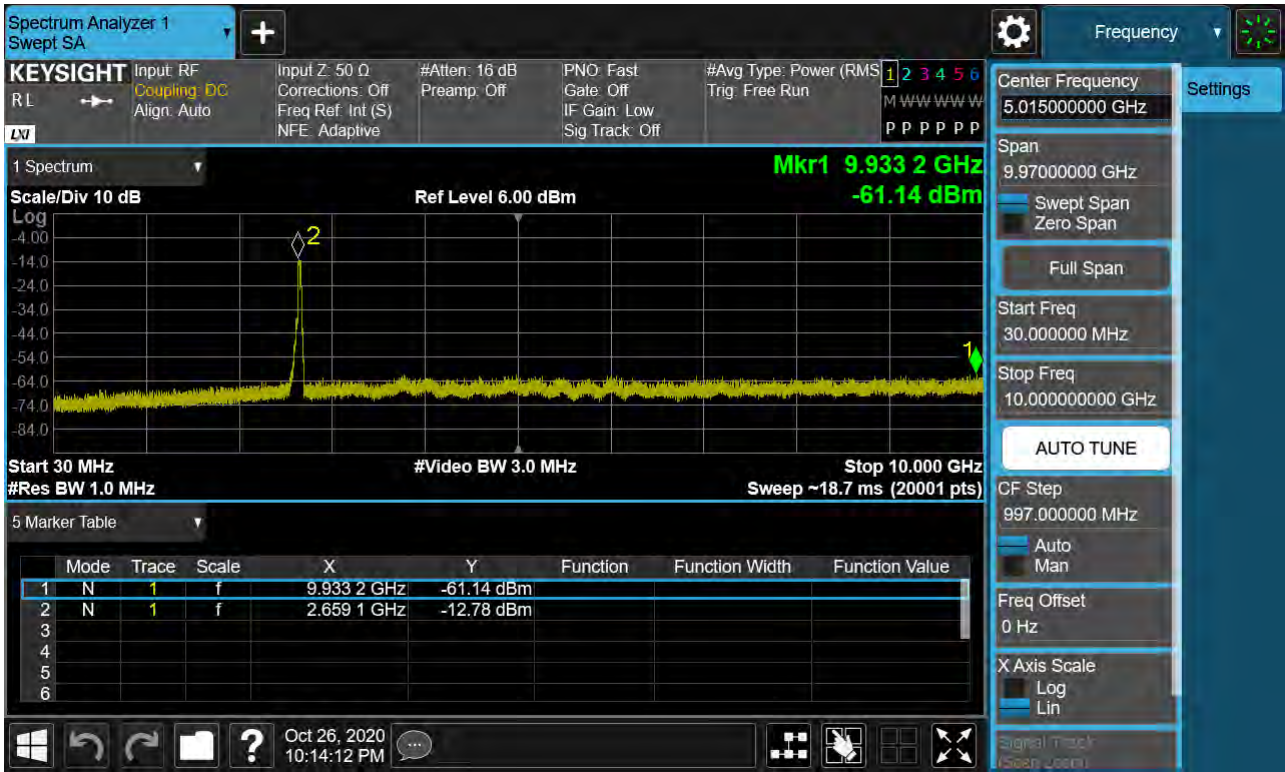


PCC 20MHz Ch41341 RB100 Offset0 SCC 15MHz Ch41512 RB75 Offset0

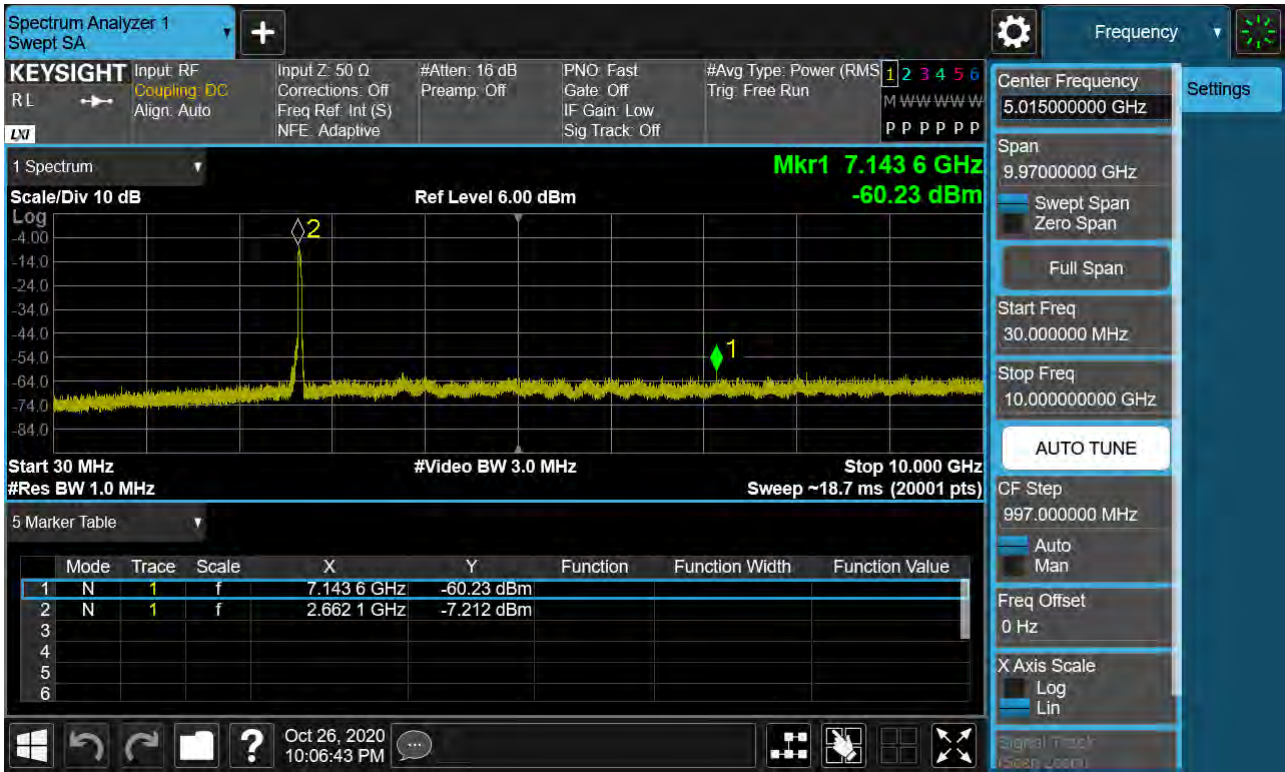


Frequency Range : 10GHz ~ 27.0GHz


PCC 5MHz Ch39683 RB1 Offset0, SCC 20MHz Ch39800 RB1 Offset99

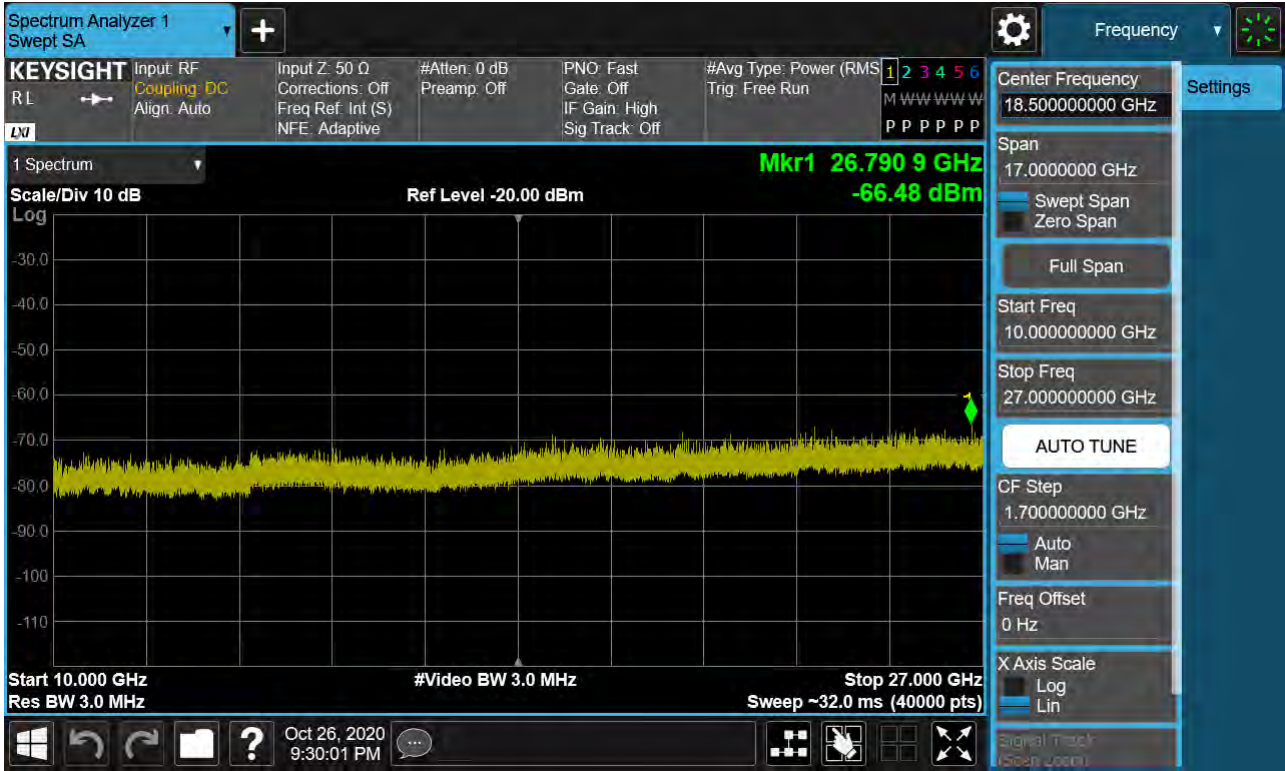


PCC 5MHz Ch39683 RB1 Offset24, SCC 20MHz Ch39800 RB1 Offset0

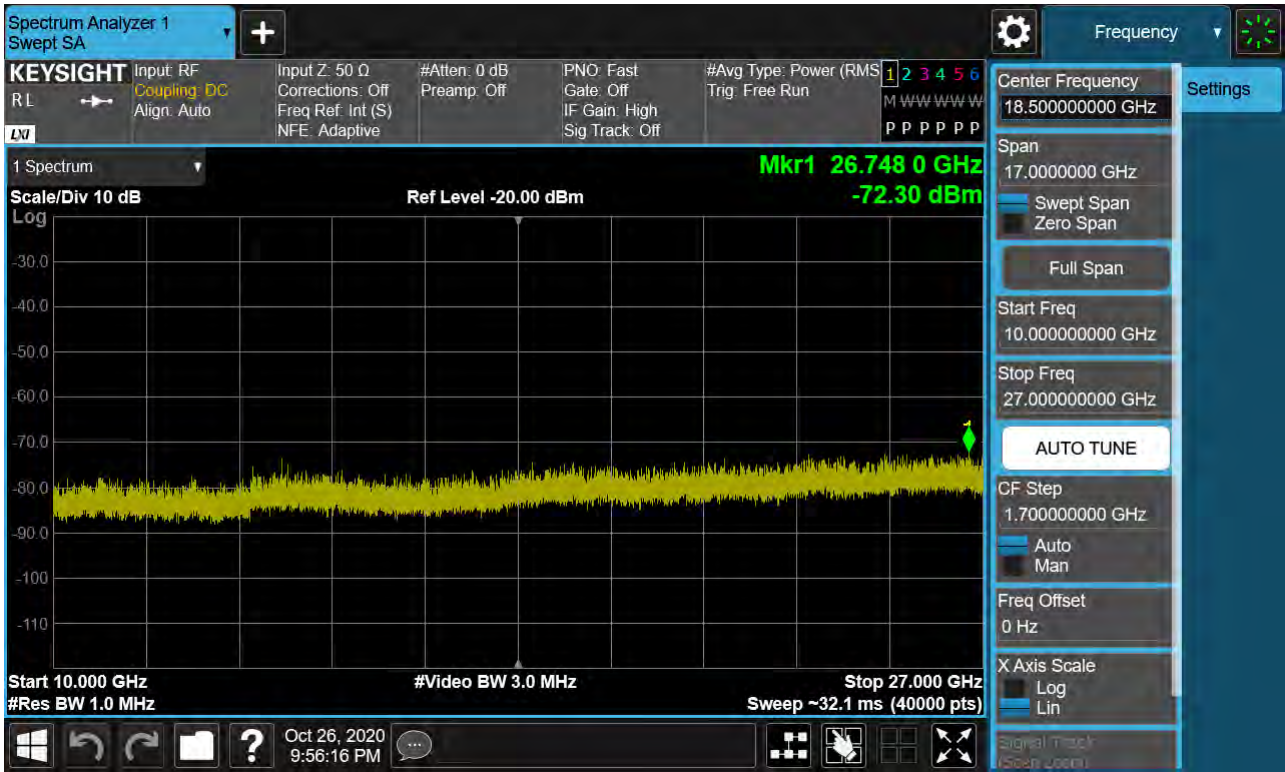


PCC 15MHz Ch40571 RB1 Offset0, SCC 10MHz Ch40691 RB1 Offset49

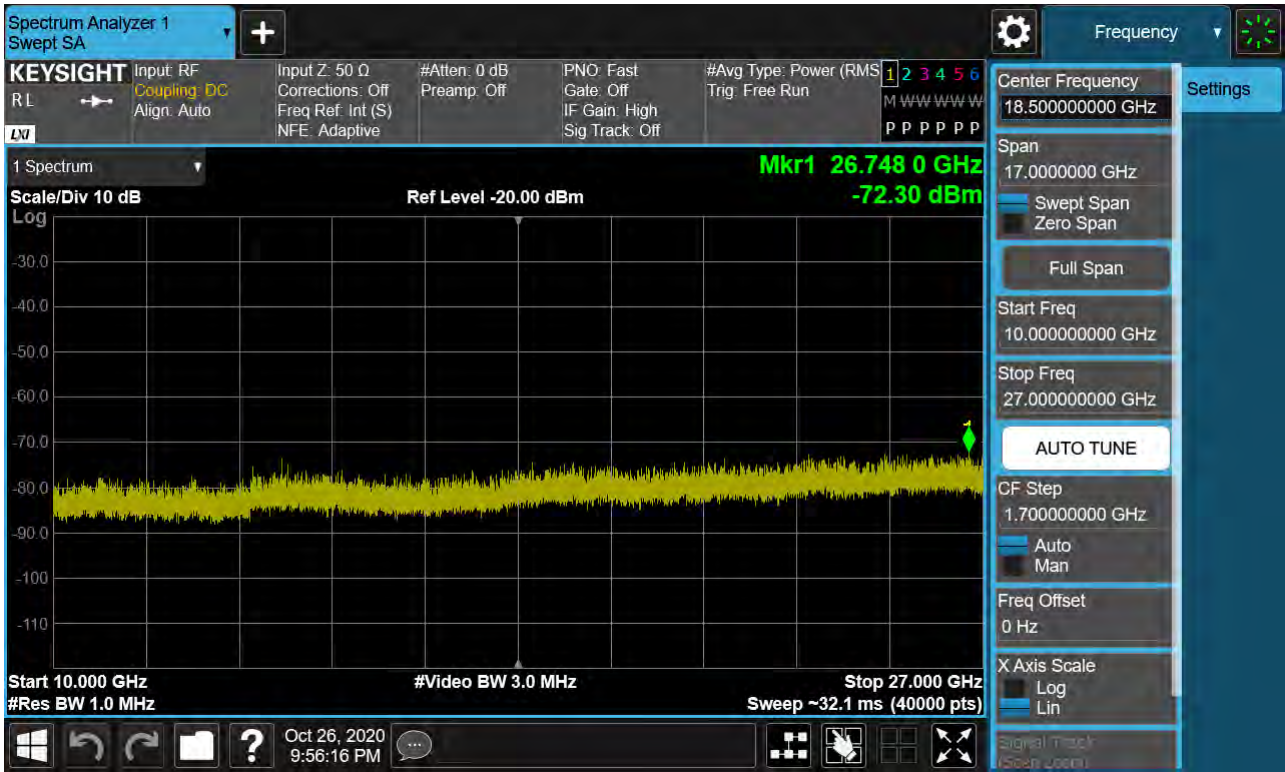


PCC 15MHz Ch40571 RB1 Offset74, SCC 10MHz Ch40691 RB1 Offset0

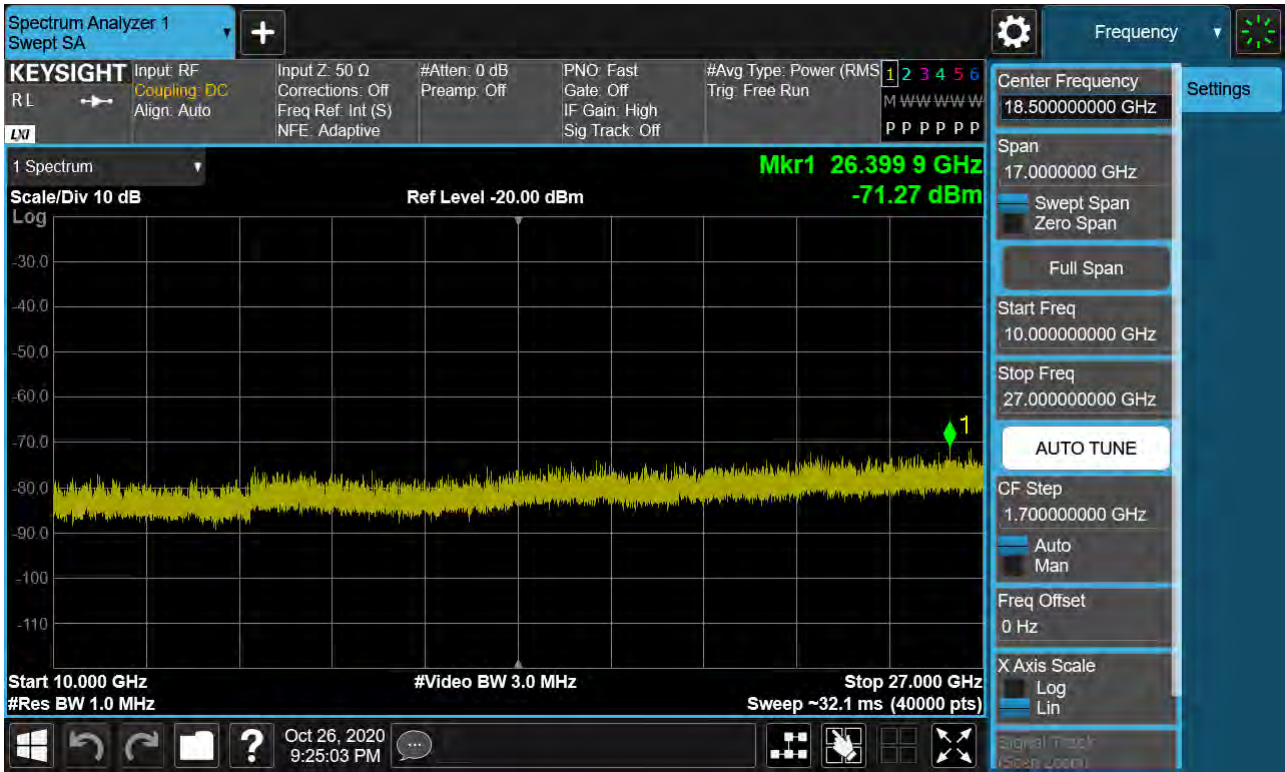


PCC 15MHz Ch41417 RB1 Offset0, SCC 10MHz Ch41537 RB1 Offset49

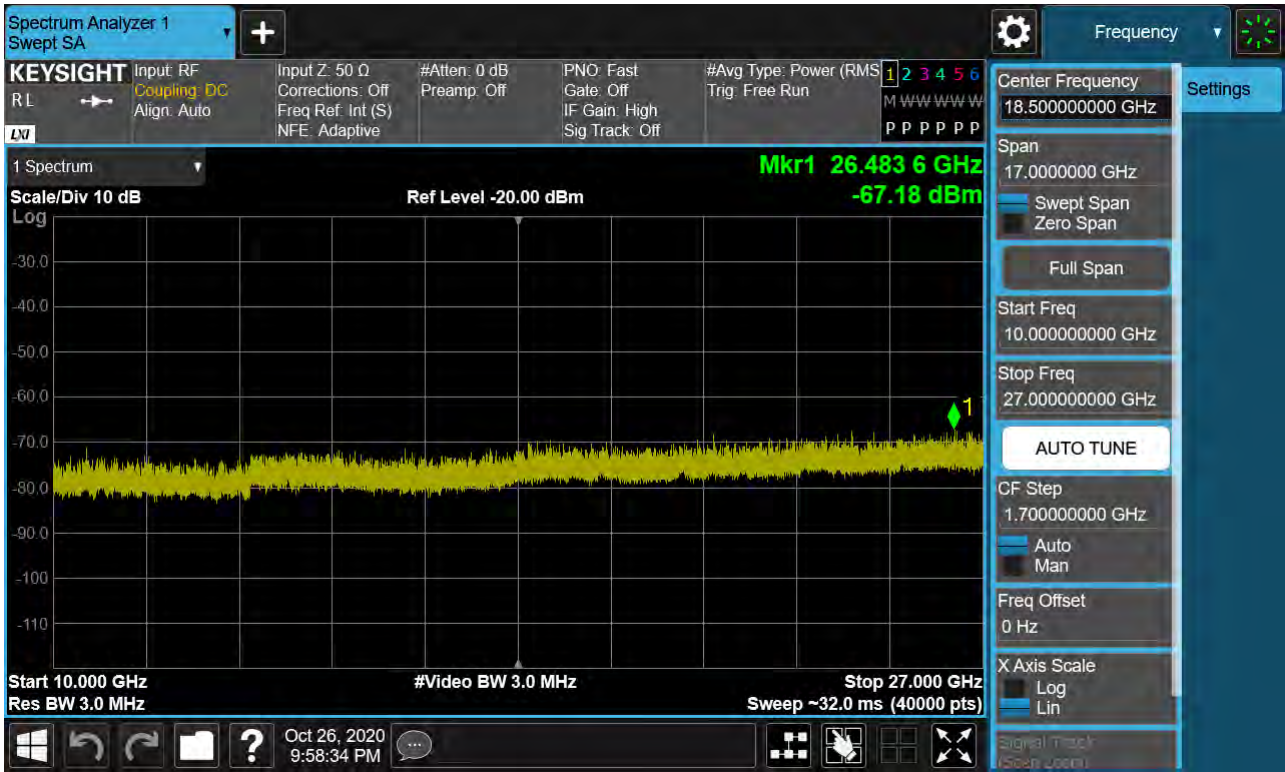


PCC 15MHz Ch41417 RB1 Offset74, SCC 10MHz Ch41537 RB1 Offset0

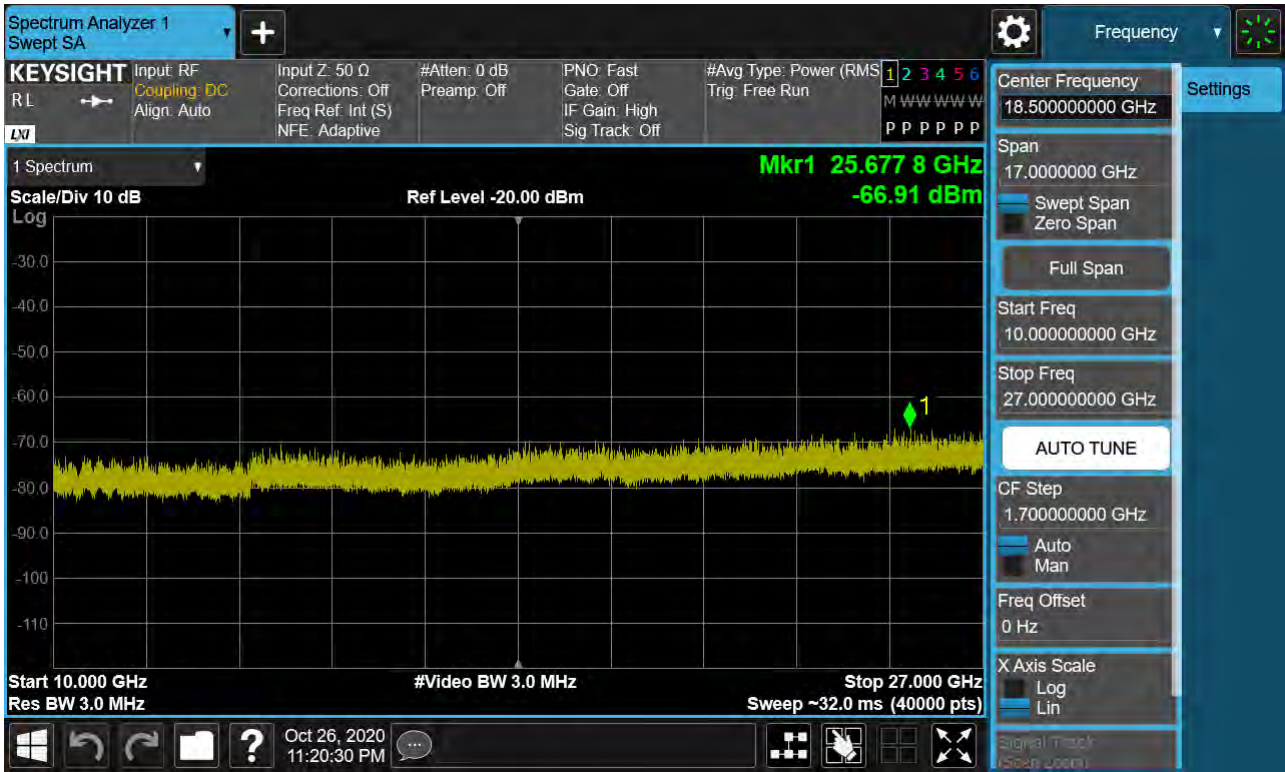


PCC 20MHz Ch39750 RB100 Offset0, SCC 15MHz Ch39921 RB75 Offset0

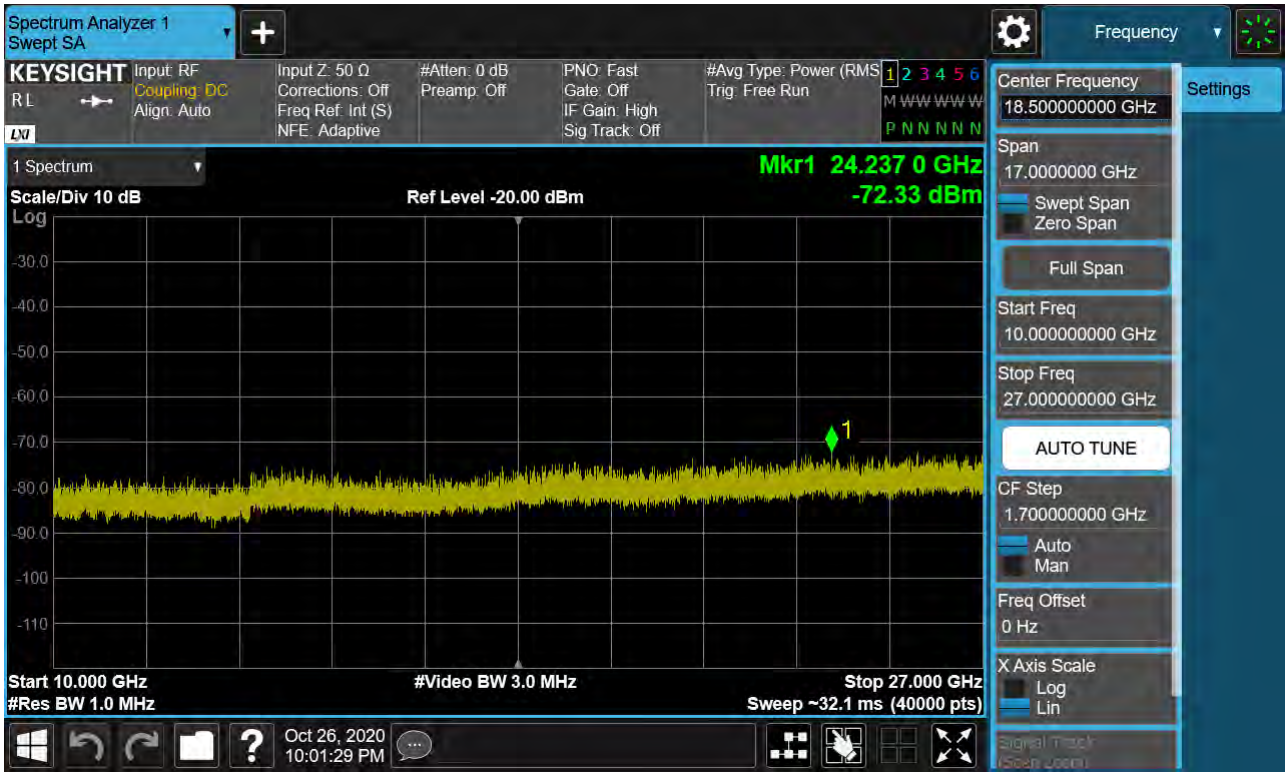


PCC 20MHz Ch39750 RB100 Offset0, SCC 20MHz Ch39948 RB100 Offset0

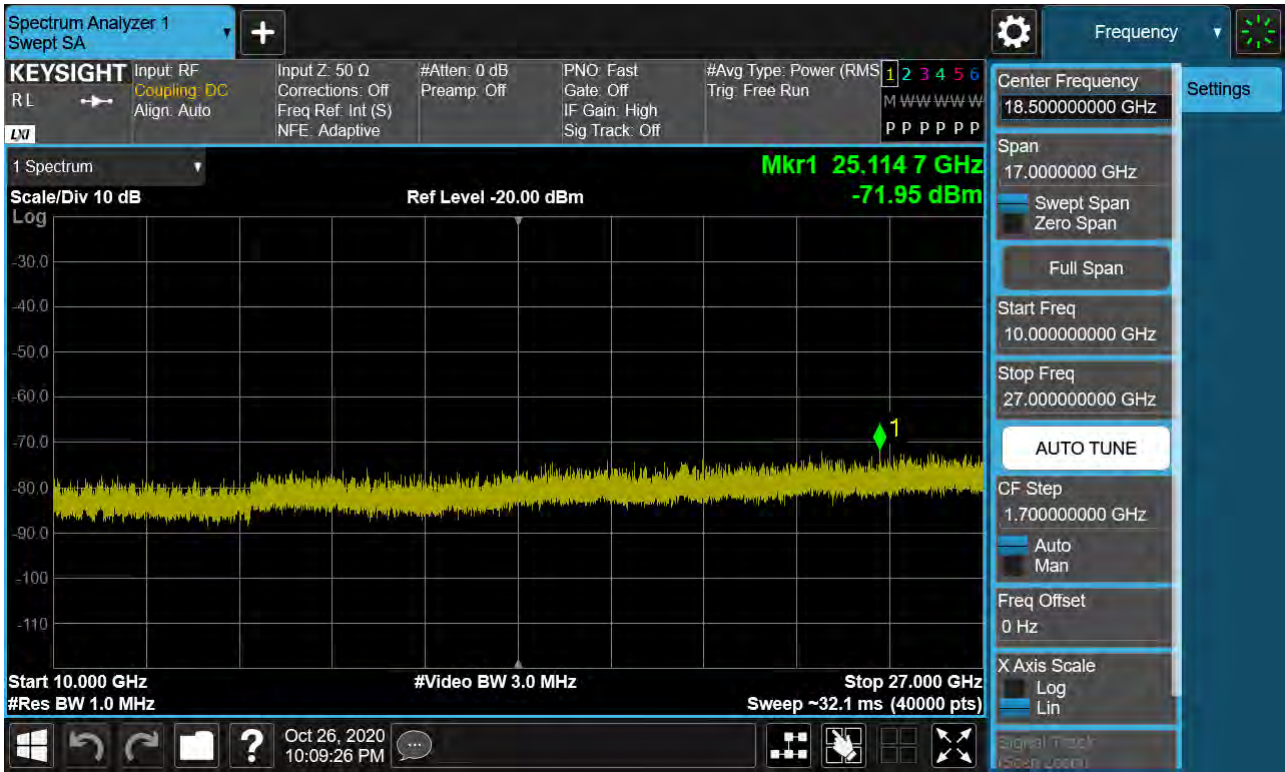


PCC 20MHz Ch40521 RB100 Offset0, SCC 20MHz Ch40719 RB100 Offset0

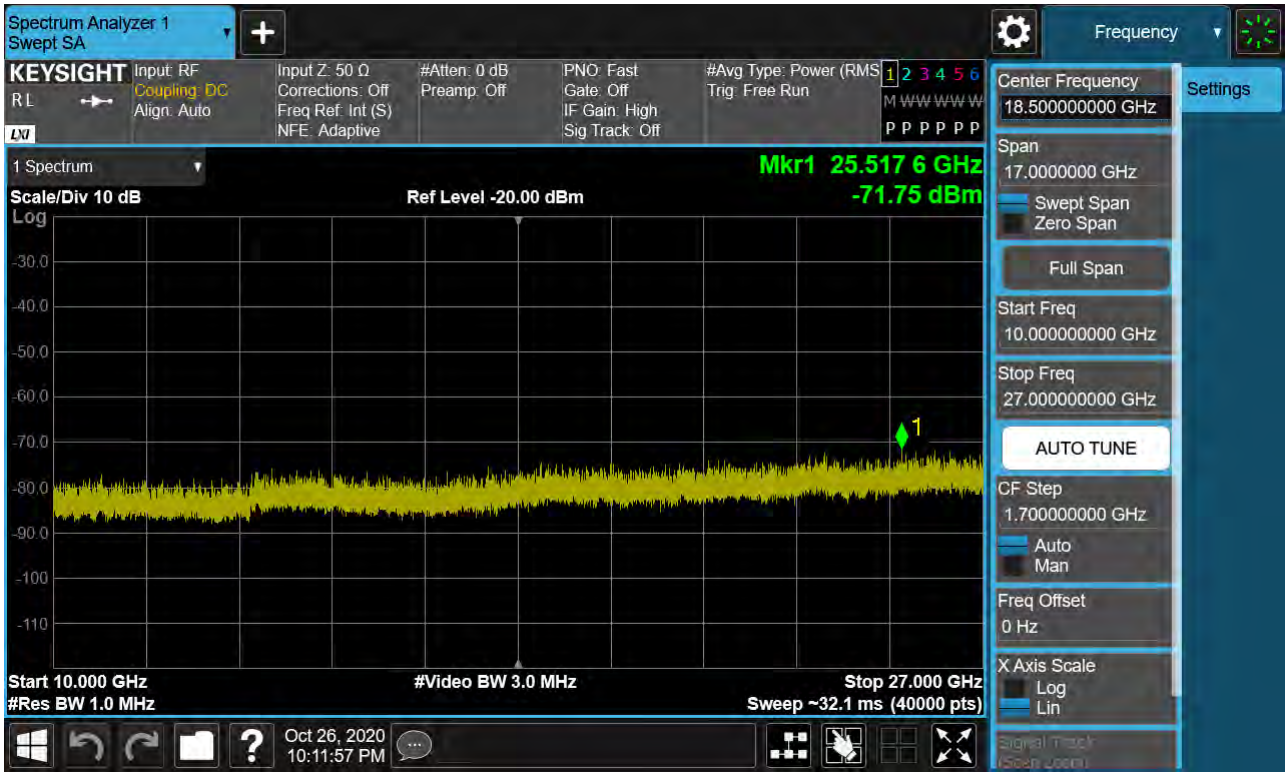


PCC 20MHz Ch40546 RB100 Offset0, SCC 15MHz Ch40717 RB75 Offset0

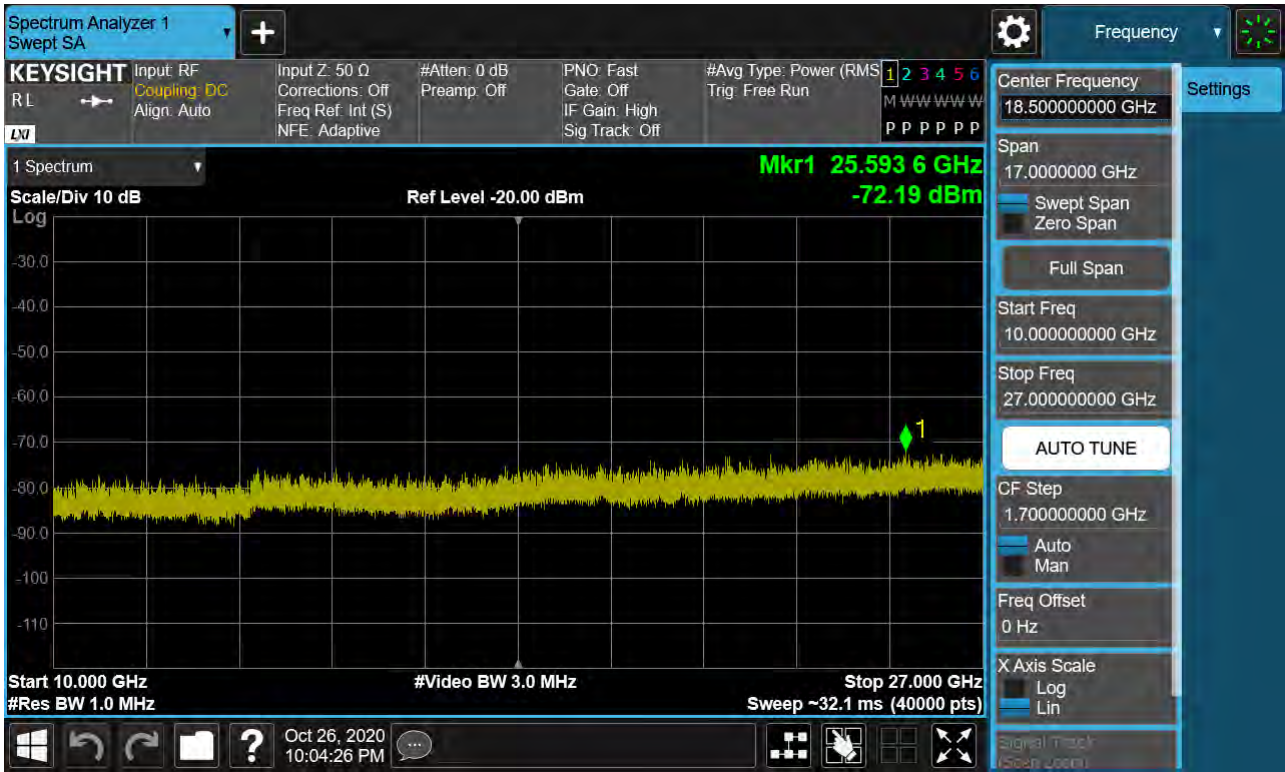

PCC 20MHz Ch41292 RB100 Offset0, SCC 20MHz Ch41490 RB100 Offset0

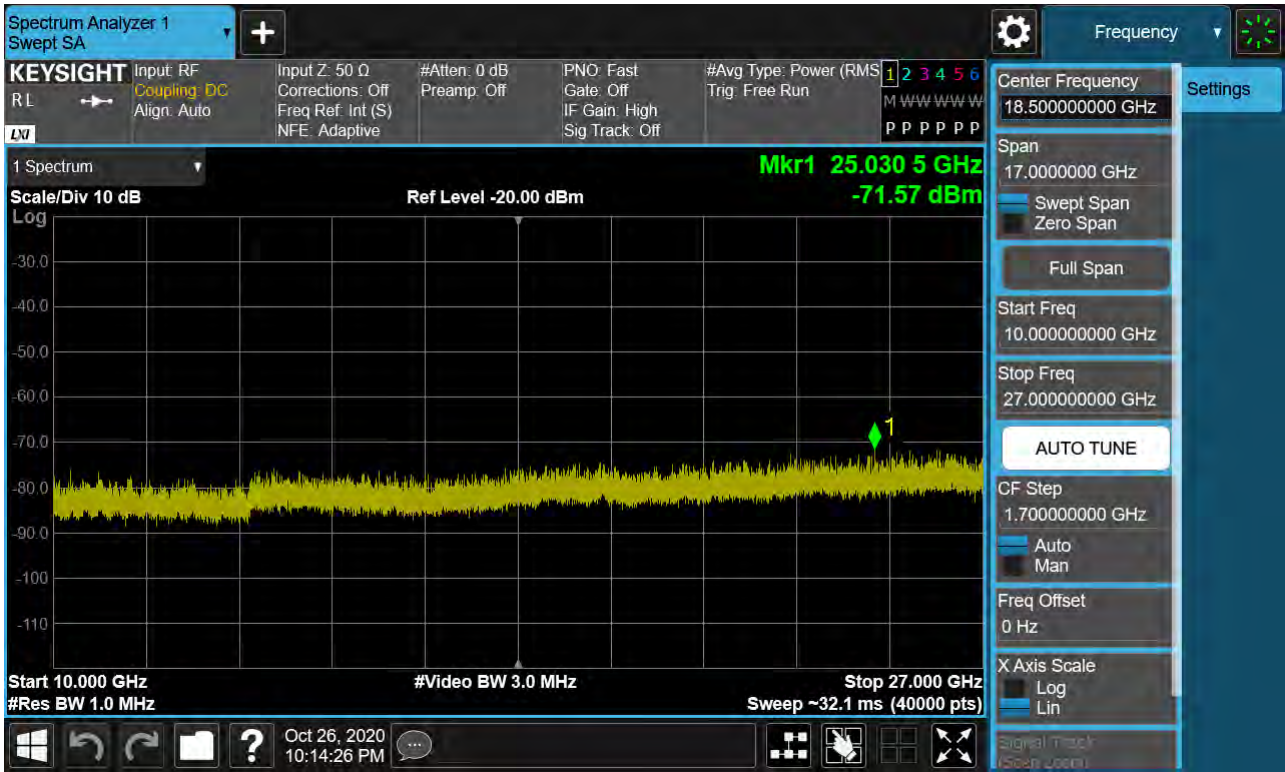

PCC 20MHz Ch41341 RB100 Offset0, SCC 15MHz Ch41512 RB75 Offset0

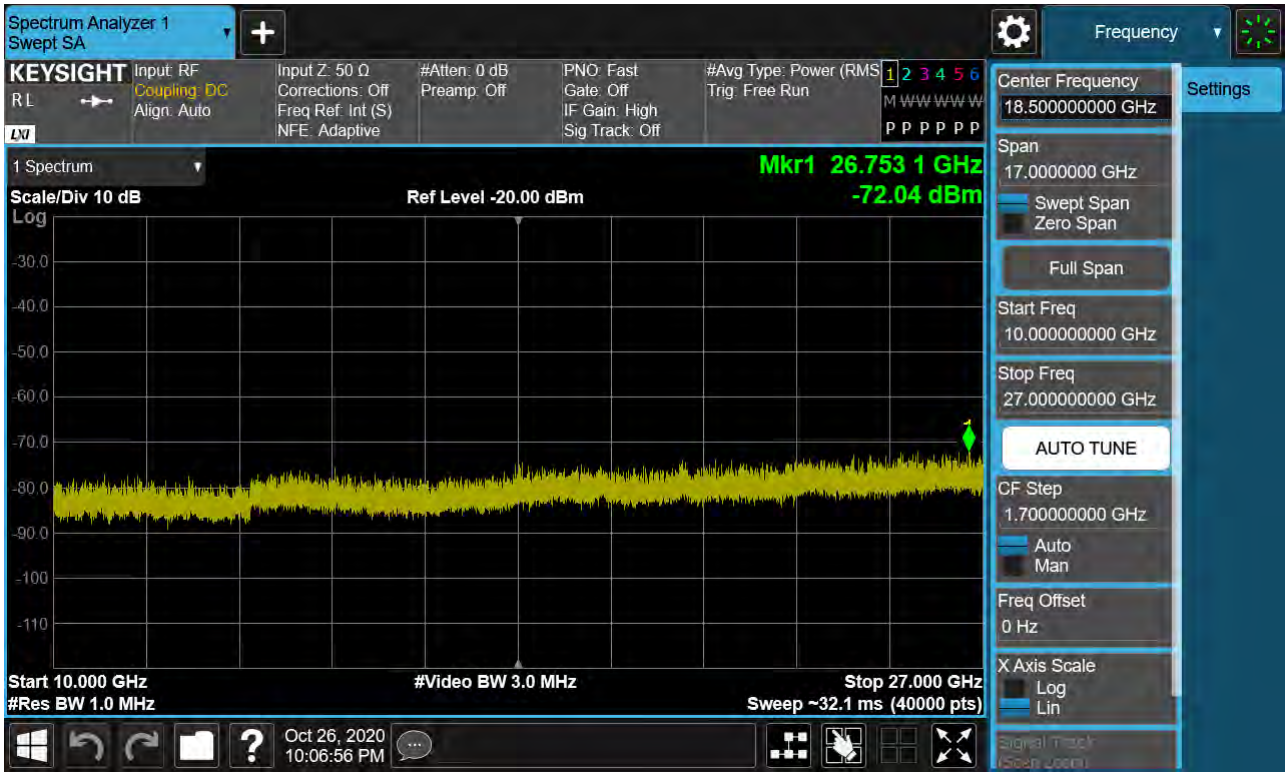

8.3.2 PC2

Operating frequency	PCC				SCC				Measurement	Factor (dB)	Measurement	Result (dBm)
	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	Maximum Frequency (GHz)		Maximum Data (dBm)	
Low	10	39703	2501.3	1/49	15	39823	2513.3	1/0	8.5848	28.591	-60.63	-32.04
Mid	15	40545	2585.5	1/74	15	40695	2600.5	1/0	9.1341	28.591	-60.39	-31.80
High	20	41440	2675.0	1/99	5	41557	2686.7	1/0	3.7757	27.976	-60.03	-32.05
Low	10	39703	2501.3	1/0	15	39823	2513.3	1/74	3.7428	27.976	-60.67	-32.69
Mid	15	40545	2585.5	1/0	15	40695	2600.5	1/74	4.0135	27.976	-61.06	-33.09
High	20	41440	2675.0	1/0	5	41557	2686.7	1/24	3.8445	27.976	-60.54	-32.56
Low	5	39683	2499.3	25/0	20	39800	2511.0	75/0	3.9826	27.976	-61.13	-33.15
Mid	5	40528	2583.8	25/0	20	40645	2595.5	75/0	4.9462	27.976	-60.87	-32.89
High	10	41395	2670.5	50/0	15	41515	2682.5	75/0	7.1436	28.591	-60.23	-31.64
Low	20	39750	2506.0	100/0	20	39948	2525.8	100/0	4.0564	27.976	-60.25	-32.27
Mid	20	40521	2583.1	100/0	20	40719	2602.9	100/0	9.8679	28.591	-60.64	-32.05
High	20	41292	2660.2	100/0	20	41490	2680.0	100/0	9.9332	28.591	-61.14	-32.55

Note:


1. Modulation : QPSK
2. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter
3. Factors for frequency :

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


4. Limit : -25.0 dBm

Frequency Range : 30MHz ~ 10GHz


PCC 5MHz Ch39683 RB25 Offset0 SCC 20MHz Ch39800 RB100 Offset0

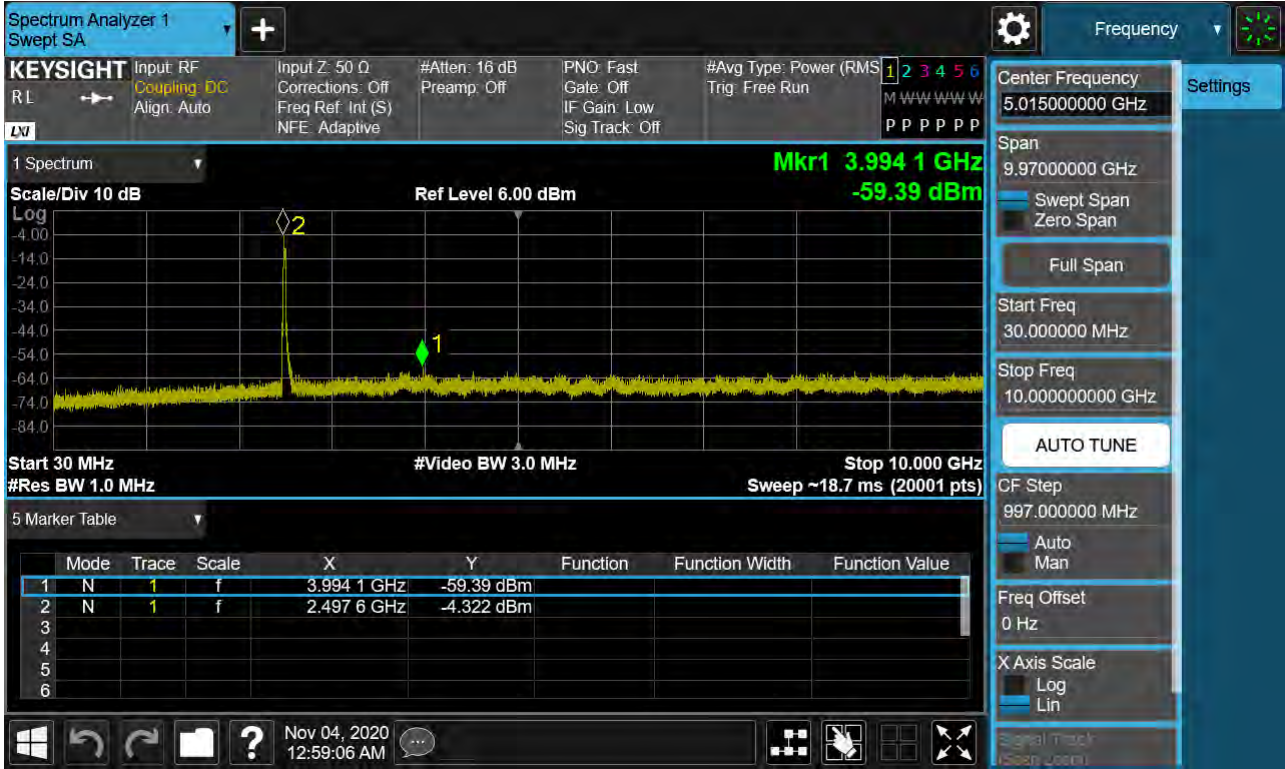


PCC 5MHz Ch40528 RB25 Offset0 SCC 20MHz Ch40645 RB100 Offset0

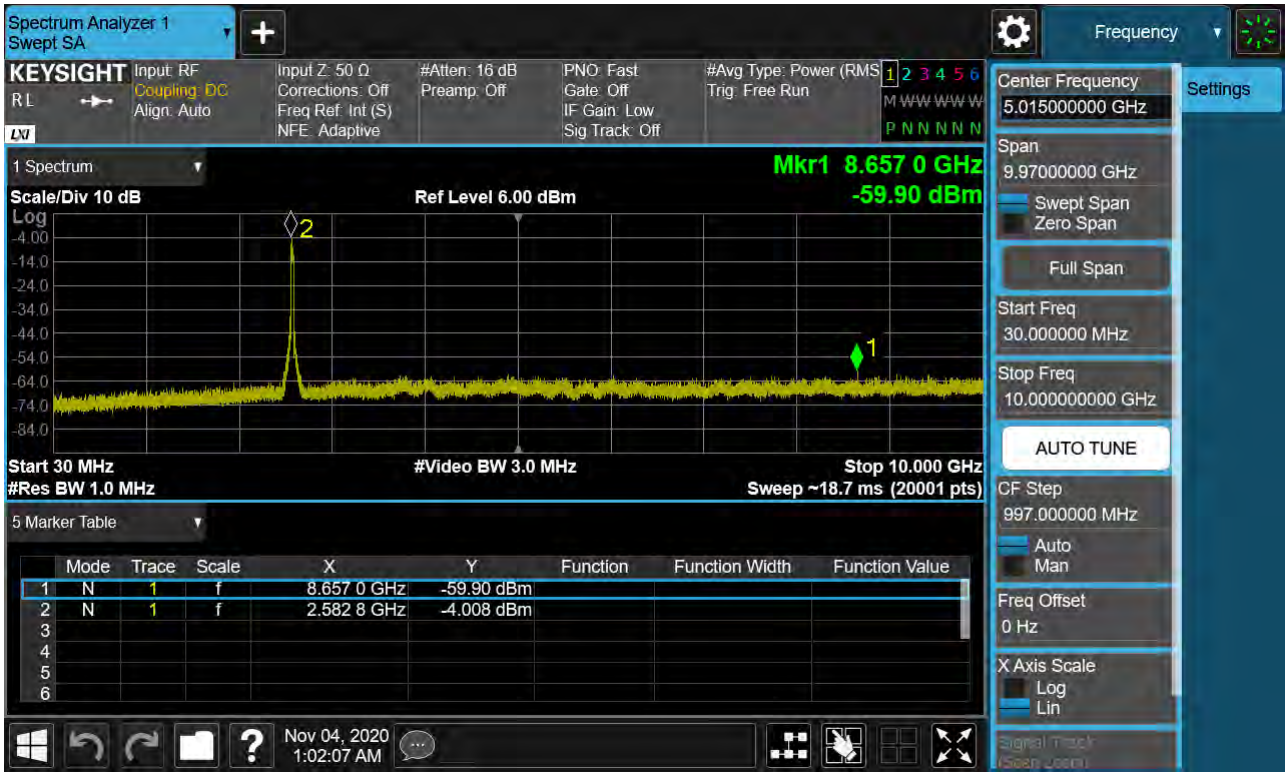


PCC 10MHz Ch39703 RB1 Offset0 SCC 15MHz Ch39823 RB1 Offset74

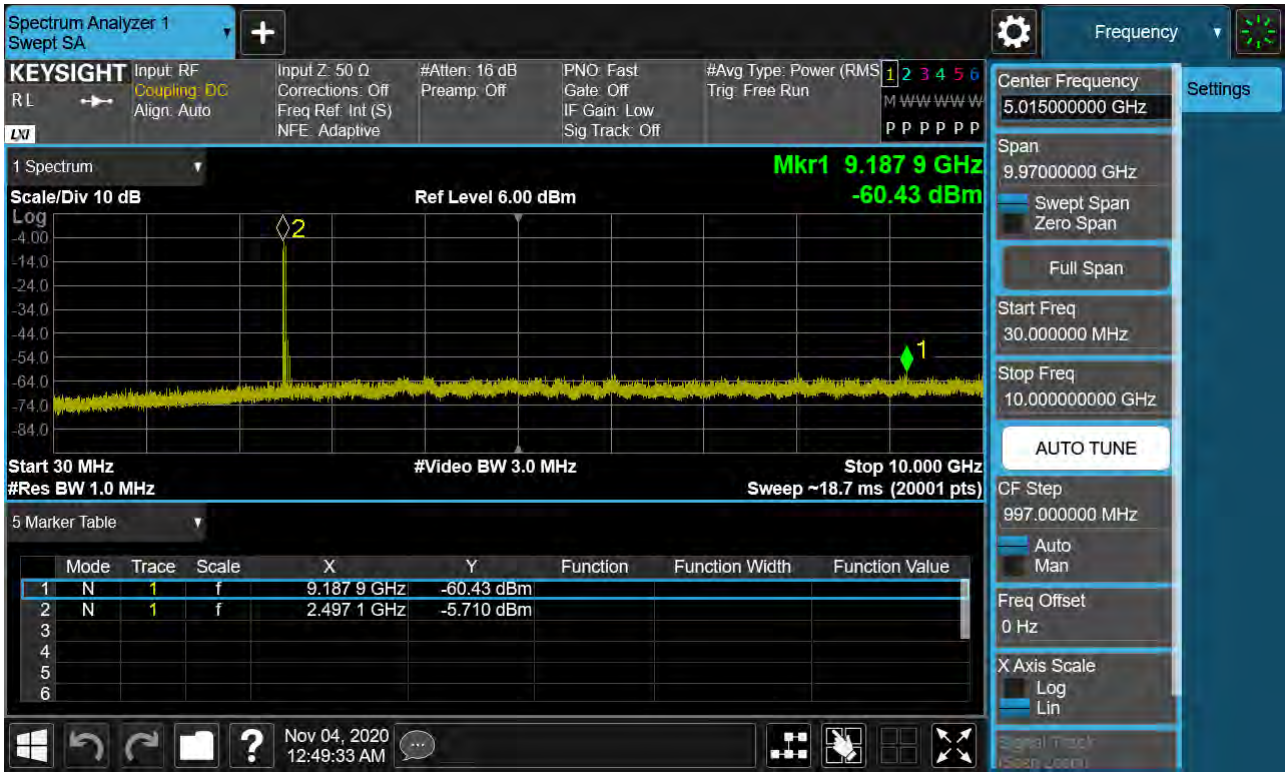


PCC 10MHz Ch39703 RB1 Offset49 SCC 15MHz Ch39823 RB1 Offset0

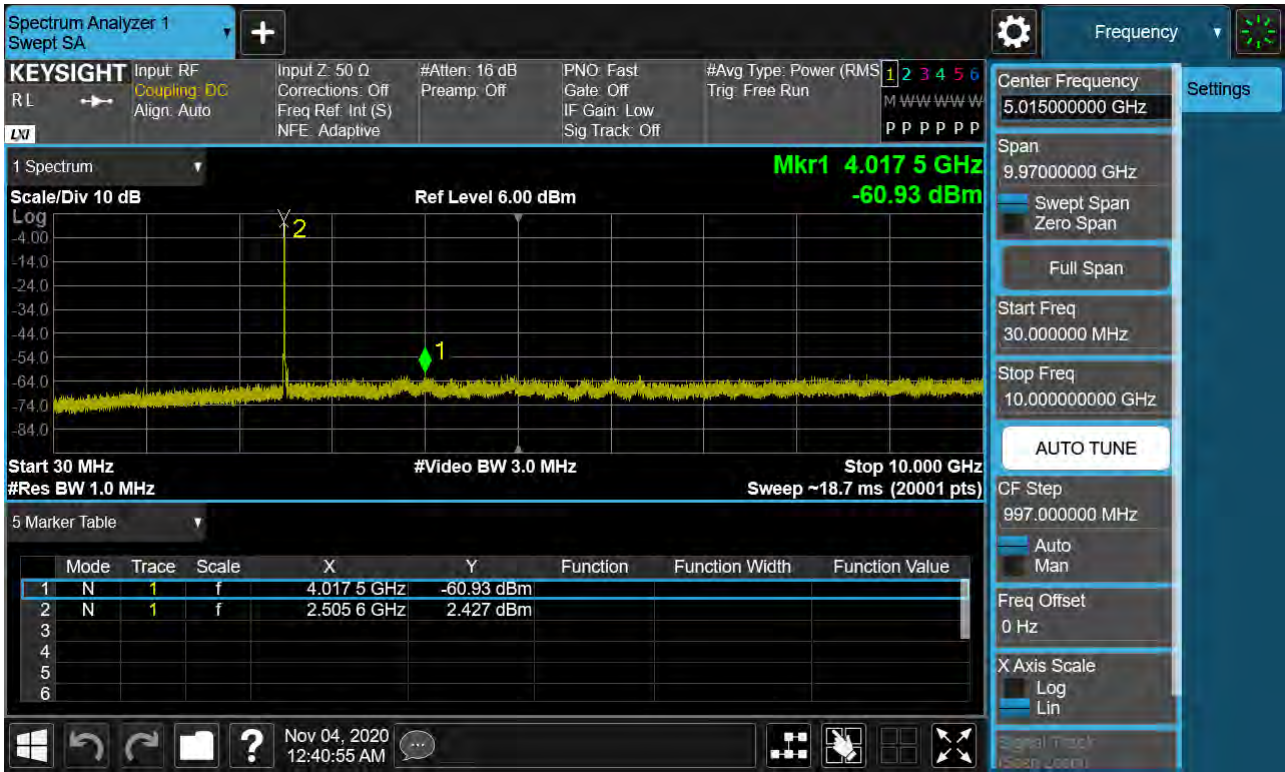


PCC 10MHz Ch41395 RB50 Offset0 SCC 15MHz Ch41515 RB75 Offset0

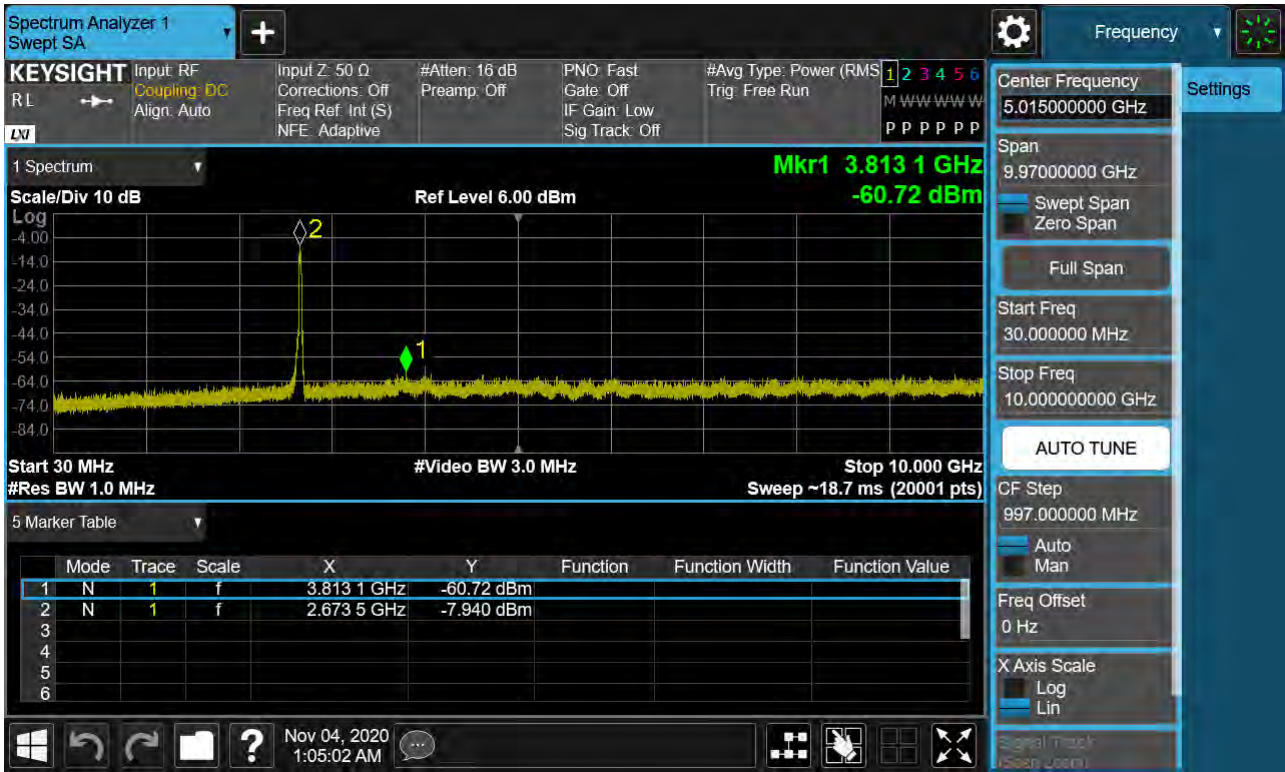


PCC 15MHz Ch40545 RB1 Offset0 SCC 15MHz Ch40695 RB1 Offset74

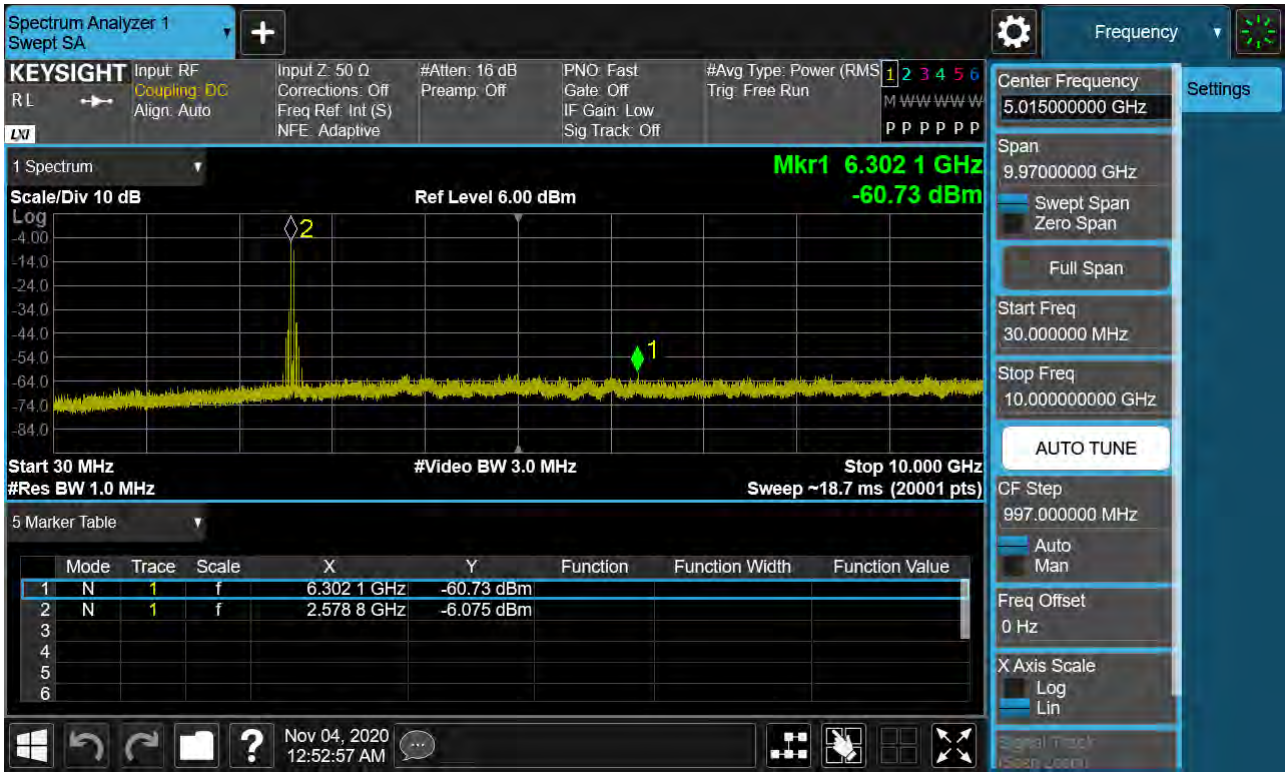


PCC 15MHz Ch40545 RB1 Offset74 SCC 15MHz Ch40695 RB1 Offset0

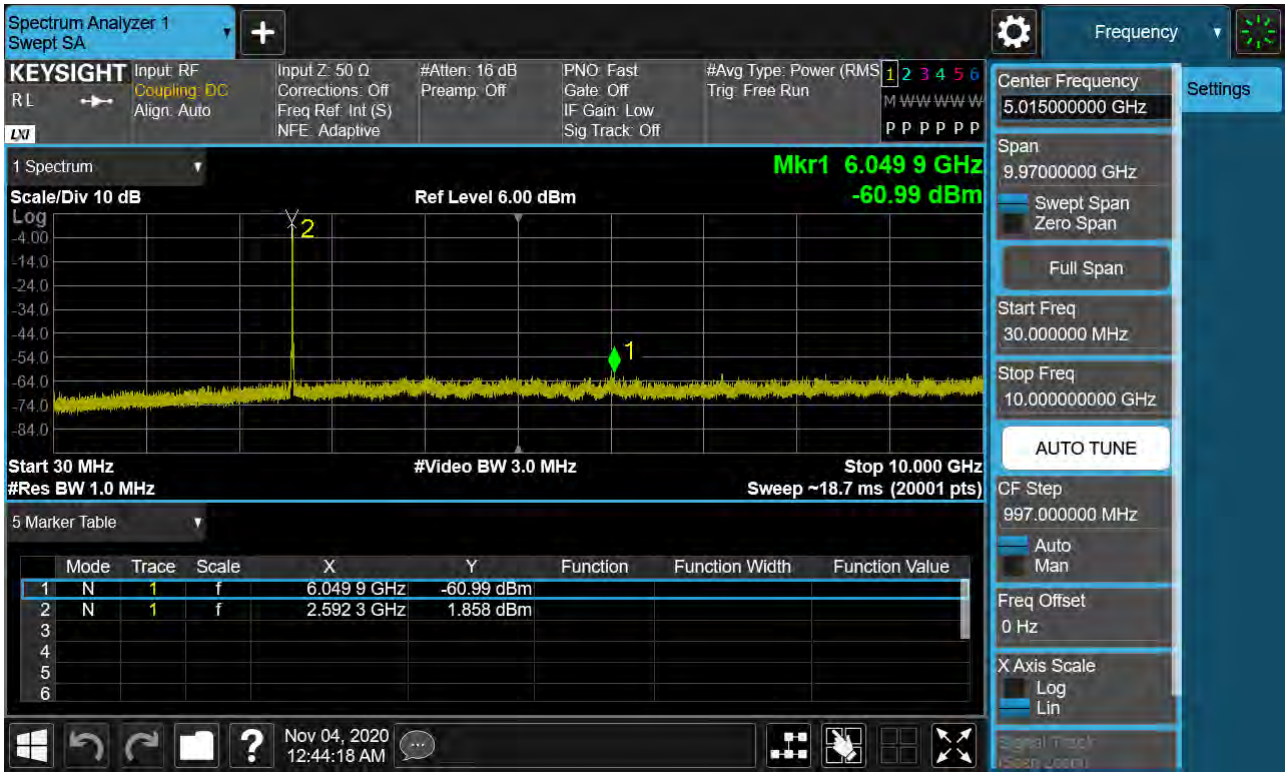


PCC 20MHz Ch39750 RB100 Offset0 SCC 20MHz Ch39948 RB100 Offset0

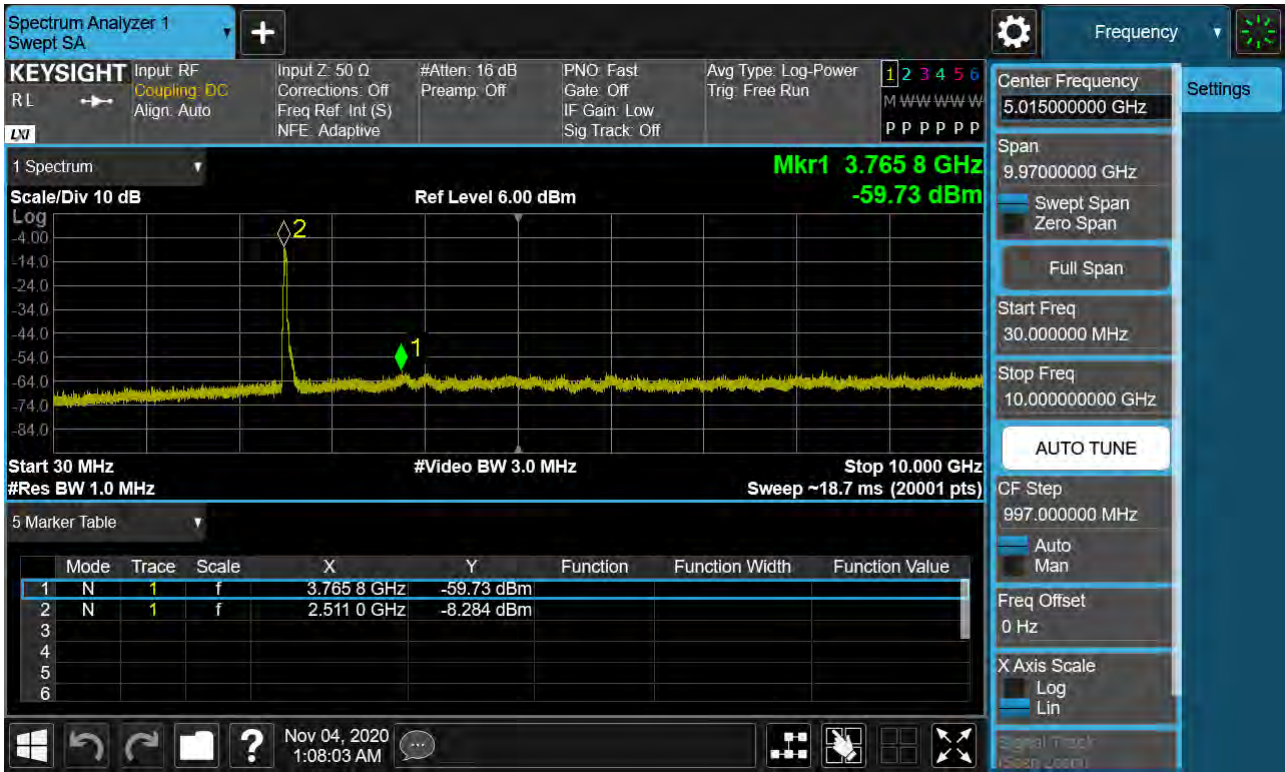


PCC 20MHz Ch40521 RB100 Offset0 SCC 20MHz Ch40719 RB100 Offset0

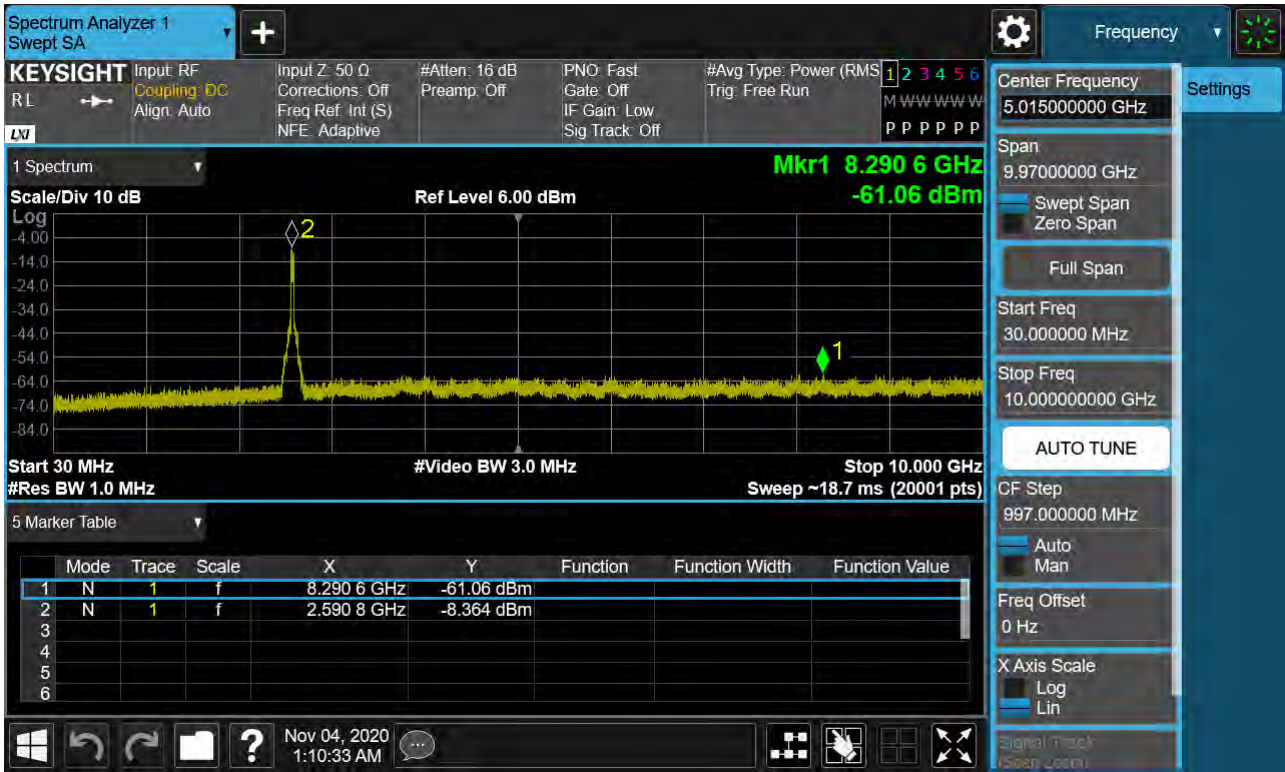


PCC 20MHz Ch41292 RB100 Offset0 SCC 20MHz Ch41490 RB100 Offset0

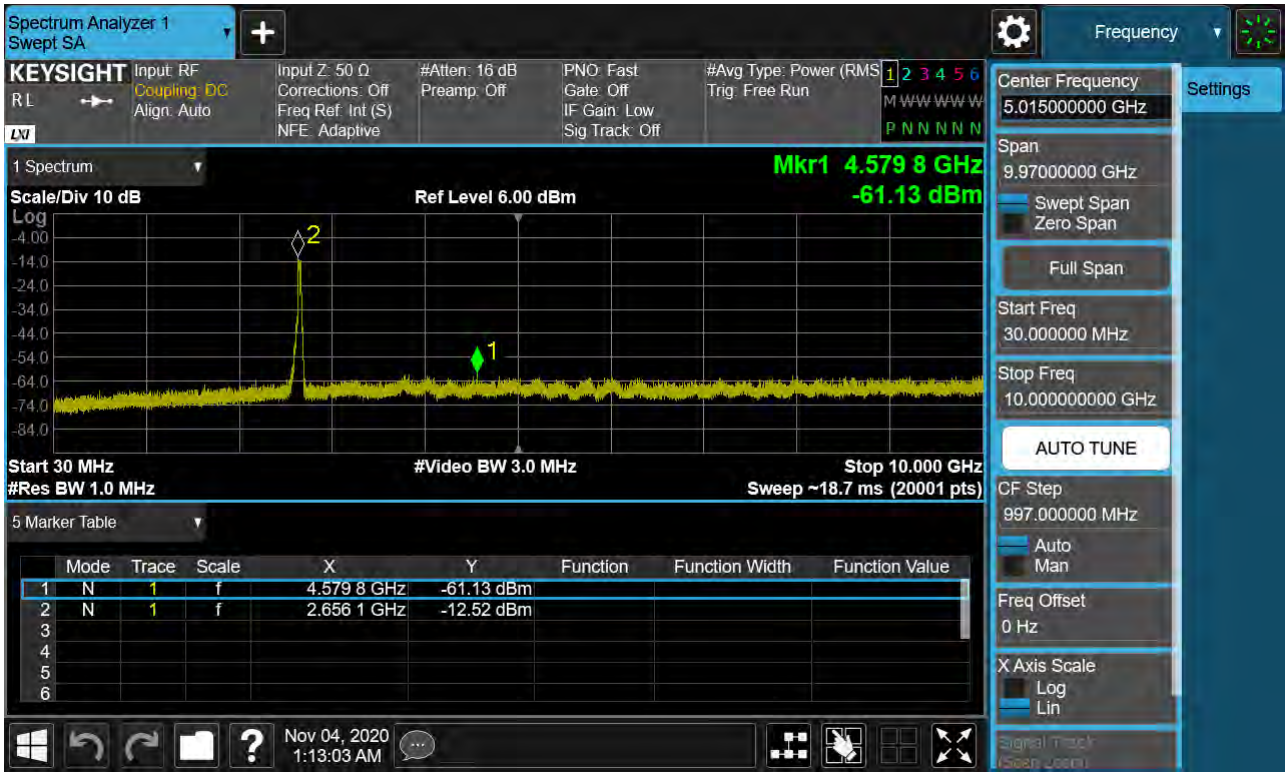

PCC 20MHz Ch41440 RB1 Offset0 SCC 5MHz Ch41557 RB1 Offset24

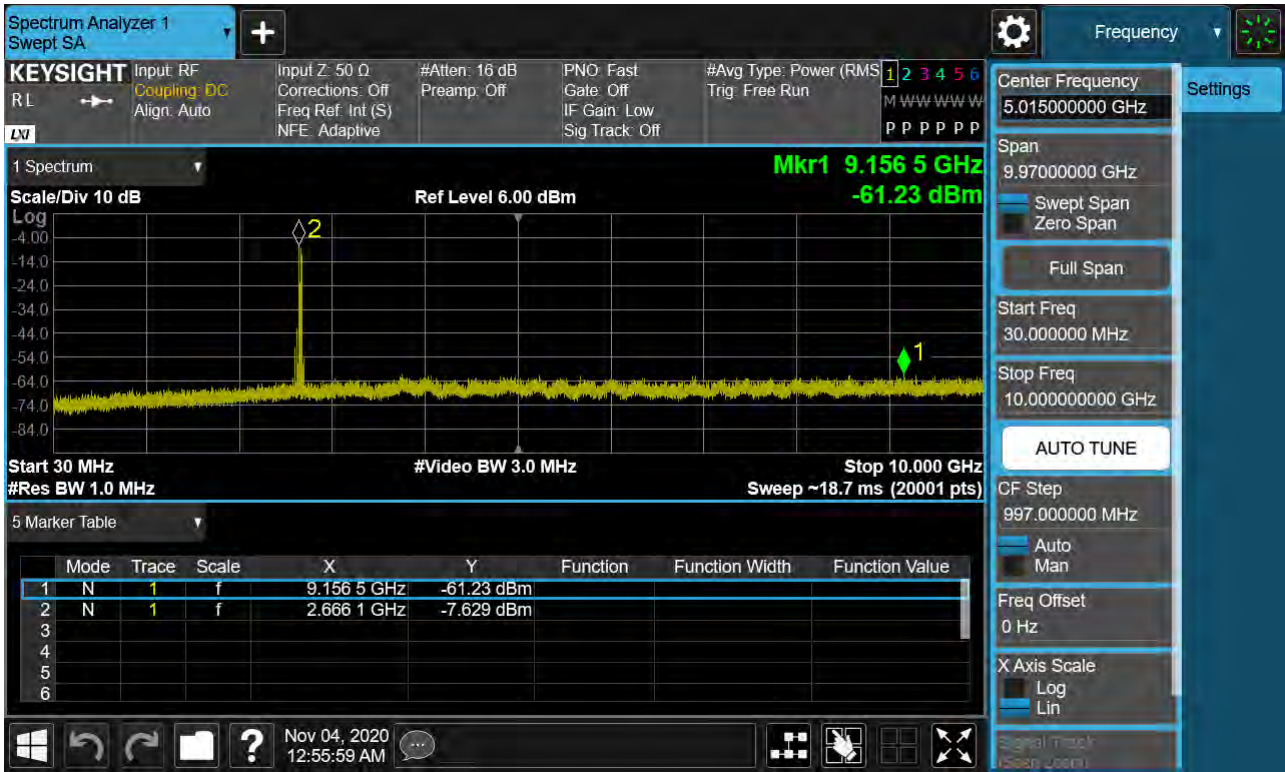


PCC 20MHz Ch41440 RB1 Offset99 SCC 5MHz Ch41557 RB1 Offset0

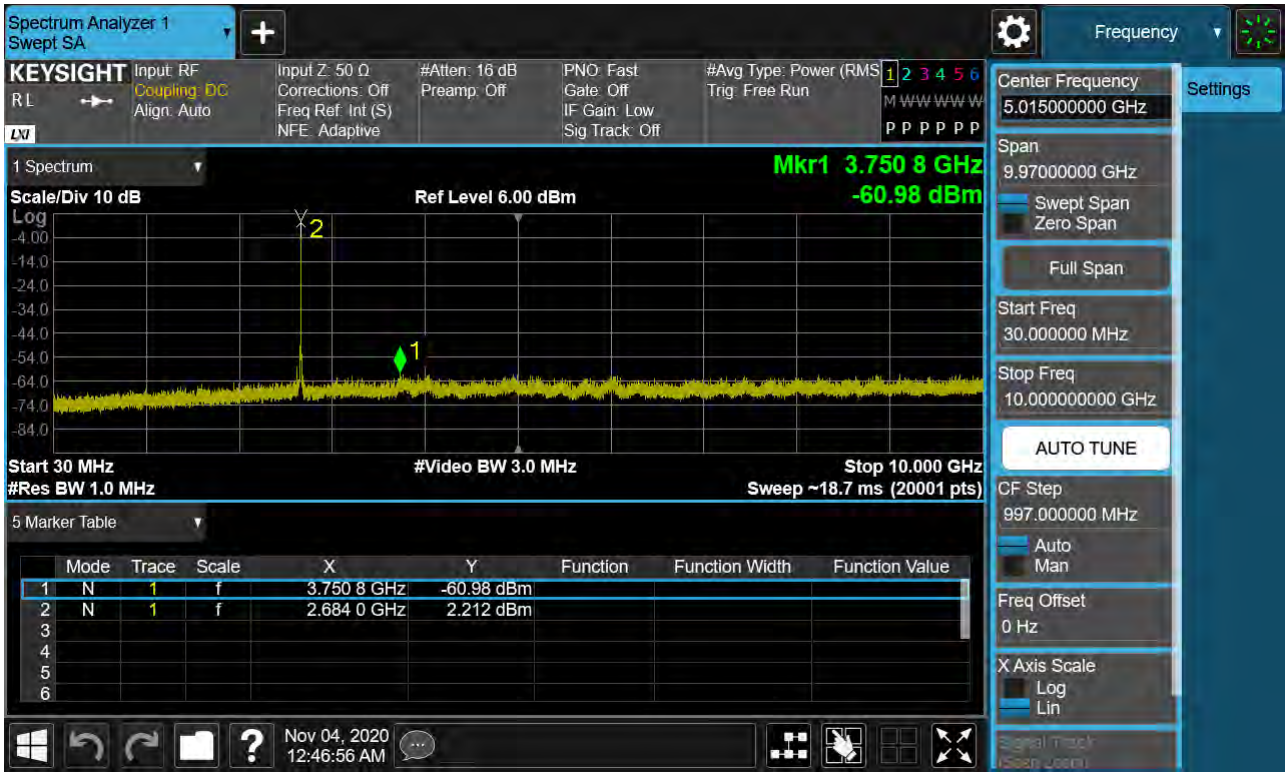

Frequency Range : 10GHz ~ 27.0GHz

PCC 5MHz Ch39683 RB25 Offset0, SCC 20MHz Ch39800 RB100 Offset0

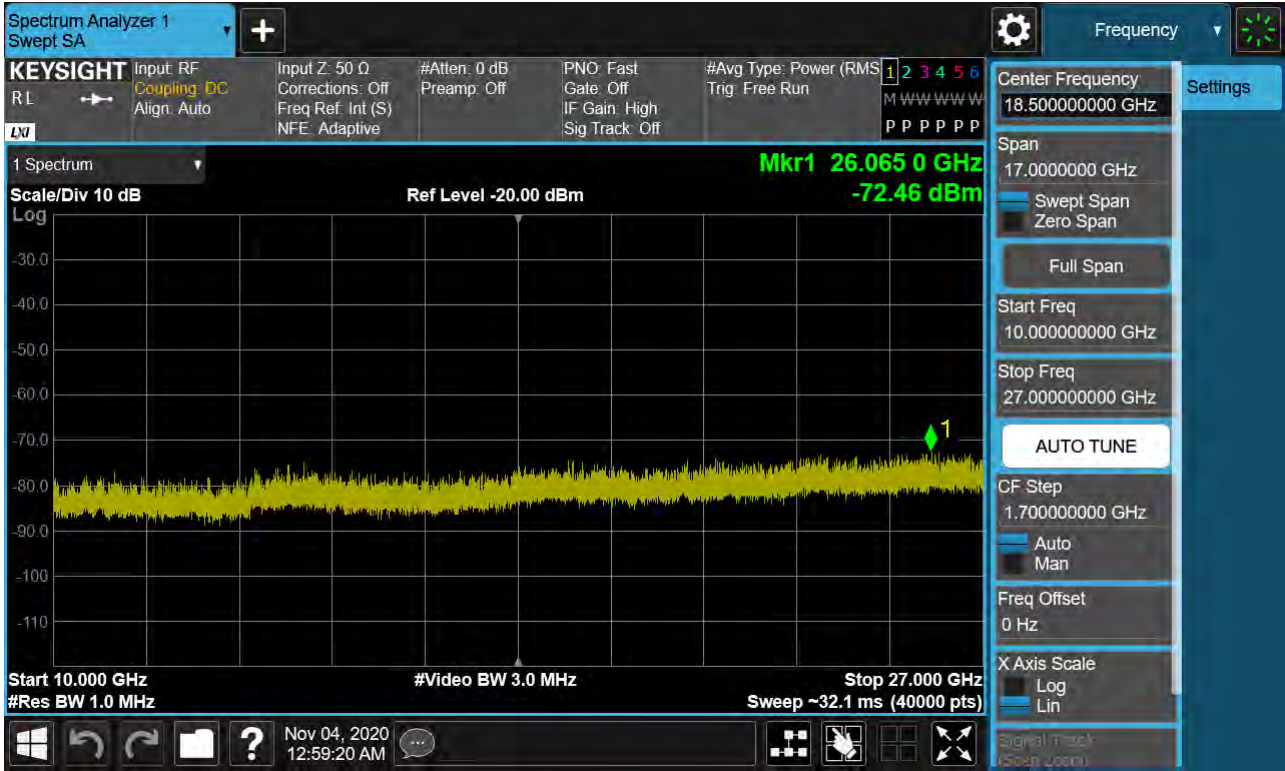

PCC 5MHz Ch40528 RB25 Offset0, SCC 20MHz Ch40645 RB100 Offset0

