

MEASUREMENT REPORT FCC Part 15F ULTRA WIDEBAND

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

09/15 - 11/10/2020

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2009140143-29.A3L

FCC ID:

A3LSMG996U

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-G996U

Additional Models:

SM-G996U1

EUT Type:

Portable Handset

FCC Classification:

Ultra Wideband (UWB)

FCC Rule Parts(s):

FCC Part 15 Subpart F (15.519, 15.521)

UWB Classification:


Hand-held Communication Device

Test Procedure(s):

ANSI C63.10-2013, KDB 393764 D01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.4-2014 (See Test Report). These measurements were performed with no deviation from the standards. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President



FCC ID: A3LSMG996U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset	Page 1 of 120	

TABLE OF CONTENTS

1.0	Introduction	3
1.1	Scope.....	3
1.2	PCTEST Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	EMI Suppression Device(s)/Modifications.....	4
3.0	DESCRIPTION OF TESTS.....	5
3.1	Evaluation Procedure	5
3.2	AC Line Conducted Emissions	5
3.3	Radiated Emissions	6
3.4	Environmental Conditions	6
4.0	Antenna Requirements	7
5.0	Measurement Uncertainty.....	8
6.0	TEST EQUIPMENT CALIBRATION DATA.....	9
7.0	TEST DATA	10
7.1	Summary	10
7.2	10dB Bandwidth.....	11
7.3	Cessation Time.....	86
7.4	Peak Power and Maximum Average Emissions	88
7.5	Radiated Measurement Data above 960MHz.....	99
7.6	Radiated Spurious Emissions Measurements – Below 1GHz.....	113
7.7	Line Conducted Measurement Data	117
8.0	CONCLUSION	120

FCC ID: A3LSMG996U	 PCTEST <small>Proud to be part of  element</small>	MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset	Page 2 of 120

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMG996U	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset	Page 3 of 120	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMG996U**. The test data contained in this report pertains only to the EUT's ultra wideband transmitter..

Test Device Serial No.: 0433M, 0432M, 0864M

2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EVDO Rev. 0/A (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1/FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, UWB, Wireless Power Transfer

2.3 Test Configuration

The EUT was tested per the guidance of Section 10 of ANSI C63.10-2013. The EUT setup procedures of ANSI C63.10-203 were used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Section 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups.

For more information please see Section 7.0 for test data and the test setup photos document for the test setup photographs.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMG996U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset	Page 4 of 120	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2014) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.7. The EMI Receiver mode of the Agilent MXA was used to perform AC line conducted emissions testing.

FCC ID: A3LSMG996U	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset	Page 5 of 120	

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. . An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMG996U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset	Page 6 of 120	

4.0 ANTENNA REQUIREMENTS

Except from §15.203 of the FCC Rules/Regulations:

“An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna(s) of the EUT are permanently attached
- There are no provisions for a connection to an external antenna

The EUT complies with the requirements of §15.203.

FCC ID: A3LSMG996U	 <small>Proud to be part of  element</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset	Page 7 of 120	

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07

FCC ID: A3LSMG996U	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset		Page 8 of 120

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Emco	3116	Horn Antenna (18 - 40GHz)	8/7/2018	Triennial	8/7/2021	9203-2178
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
ETS-Lindgren	3816/2NM	LISN	7/9/2020	Biennial	7/9/2022	114451
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY52350166
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/9/2020	Annual	1/9/2021	NMLC-2
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/10/2020	Annual	8/10/2021	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	10/1/2019	Biennial	10/1/2021	310233
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol Science	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107
Rohde & Schwarz	TC-TA18	Cross-Pol Antenna 400MHz-18GHz	7/8/2020	Biennial	7/8/2022	101058

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMG996U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset	Page 9 of 120	

7.0 TEST DATA

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMG996U
 FCC Classification: Ultra Wideband (UWB)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
§15.503, §15.519 (b)	10dB Bandwidth	≥ 500MHz	RADIATED	PASS	Section 7.2
§15.519(a)(1)	Cessation Time	Transmission shall cease in less than 10s			Section 7.3
§15.519(e)	Maximum Peak Power	< 0dBm EIRP in 50MHz BW			Section 7.4
§15.519(c)	Maximum Average Emission in the range of 3100 – 10600 MHz	< -41.3 EIRP in dBm			Section 7.4
§15.519(c)	Radiated Emissions Above 960MHz	See table in 15.519(c) for details			Section 7.4, 7.5
§15.519(d)	Radiated Emissions in the 1164 – 1240Mhz and 1559 – 1610MHz GPS Bands	< -85.3 EIRP in dBm			Section 7.5
§15.519(c), §15.519(a)	Radiate Emissions Below 960MHz	Emissions in restricted bands must meet the radiated limits detailed in 15.209			Section 7.6
§15.207	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen)	LINE CONDUCTED	PASS	Section 7.7

Table 7-1. Summary of Test Results

Note:

The equipment was capable of operating on two antennas in two separate modes [HPRF and BPRF] as well as with different preambles. Care was taken to ensure the worst case modes were investigated and reported.

FCC ID: A3LSMG996U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset	Page 10 of 120	

7.2 10dB Bandwidth

§15.503(a), §15.519(b)

Test Overview and Limit

Per the definition of 15.503, the UWB Bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna.

The 10dB bandwidth of the UWB signal must remain fully within the 3100 – 10,600MHz band. The 10dB bandwidth of the UWB signal must also be greater than or equal to 500MHz.

Test Procedures Used

ANSI C63.10-2013 Section 10.1

Test Settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Detector = Peak
4. Span was set wide enough to capture the 10dB points of the signal
5. Trace mode = max hold
6. Sweep = 2s
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

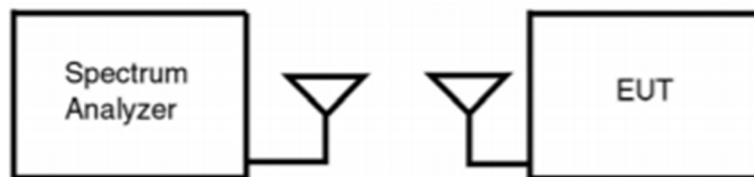


Figure 7-1. Test Instrument and Measurement Setup


FCC ID: A3LSMG996U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset	Page 11 of 120	

ANT	CH	Preamble Id	CONFIG	Mode	PAYLOAD [Bytes]	FL [GHz]	FH [GHz]	fM [GHz]	BW [MHz]	Min BW [MHz]	Pass/Fail
1	5	9	SP0	BPRF	20	6.101	6.648	6.375	547.00	500	P
1	5	9	SP1	BPRF	20	6.208	6.878	6.543	670.00	500	P
1	5	9	SP3	BPRF	20	6.209	6.877	6.543	668.00	500	P
2	5	9	SP0	BPRF	20	6.100	6.883	6.492	783.00	500	P
2	5	9	SP1	BPRF	20	6.101	6.680	6.391	579.00	500	P
2	5	9	SP3	BPRF	20	6.199	6.877	6.538	678.00	500	P
1	5	10	SP0	BPRF	20	6.296	6.881	6.589	585.00	500	P
1	5	10	SP1	BPRF	20	6.101	6.682	6.392	581.00	500	P
1	5	10	SP3	BPRF	20	6.098	6.687	6.393	589.00	500	P
2	5	10	SP0	BPRF	20	6.103	6.645	6.374	542.00	500	P
2	5	10	SP1	BPRF	20	6.218	6.879	6.549	661.00	500	P
2	5	10	SP3	BPRF	20	6.096	6.879	6.488	783.00	500	P
1	5	11	SP0	BPRF	20	6.097	6.882	6.490	785.00	500	P
1	5	11	SP1	BPRF	20	6.097	6.881	6.489	784.00	500	P
1	5	11	SP3	BPRF	20	6.228	6.879	6.554	651.00	500	P
2	5	11	SP0	BPRF	20	6.103	6.876	6.490	773.00	500	P
2	5	11	SP1	BPRF	20	6.205	6.708	6.457	503.00	500	P
2	5	11	SP3	BPRF	20	6.094	6.876	6.485	782.00	500	P
1	5	12	SP0	BPRF	20	6.247	6.879	6.563	632.00	500	P
1	5	12	SP1	BPRF	20	6.228	6.881	6.555	653.00	500	P
1	5	12	SP3	BPRF	20	6.220	6.879	6.550	659.00	500	P
2	5	12	SP0	BPRF	20	6.103	6.680	6.392	577.00	500	P
2	5	12	SP1	BPRF	20	6.097	6.880	6.489	783.00	500	P
2	5	12	SP3	BPRF	20	6.194	6.878	6.536	684.00	501	P
1	5	25	SP0	HPRF	20	6.103	6.687	6.395	584.00	500	P
1	5	25	SP1	HPRF	20	6.243	6.879	6.561	636.00	500	P
1	5	25	SP3	HPRF	20	6.266	6.879	6.573	613.00	500	P
2	5	25	SP0	HPRF	20	6.103	6.605	6.354	502.00	500	P
2	5	25	SP1	HPRF	20	6.101	6.611	6.356	510.00	500	P
2	5	25	SP3	HPRF	20	6.103	6.606	6.355	503.00	500	P
1	5	26	SP0	HPRF	20	6.103	6.680	6.392	577.00	500	P
1	5	26	SP1	HPRF	20	6.099	6.692	6.396	593.00	500	P
1	5	26	SP3	HPRF	20	6.097	6.882	6.490	785.00	500	P
2	5	26	SP0	HPRF	20	6.103	6.612	6.358	509.00	500	P
2	5	26	SP1	HPRF	20	6.103	6.623	6.363	520.00	500	P
2	5	26	SP3	HPRF	20	6.101	6.617	6.359	516.00	500	P
1	5	27	SP0	HPRF	20	6.205	6.877	6.541	672.00	500	P
1	5	27	SP1	HPRF	20	6.100	6.669	6.385	569.00	500	P
1	5	27	SP3	HPRF	20	6.232	6.880	6.556	648.00	500	P
2	5	27	SP0	HPRF	20	6.096	6.879	6.488	783.00	500	P
2	5	27	SP1	HPRF	20	6.097	6.880	6.489	783.00	500	P
2	5	27	SP3	HPRF	20	6.097	6.880	6.489	783.00	500	P
1	5	28	SP0	HPRF	20	6.216	6.877	6.547	661.00	500	P
1	5	28	SP1	HPRF	20	6.097	6.880	6.489	783.00	500	P
1	5	28	SP3	HPRF	20	6.100	6.696	6.398	596.00	500	P
2	5	28	SP0	HPRF	20	6.096	6.879	6.488	783.00	500	P
2	5	28	SP1	HPRF	20	6.103	6.647	6.375	544.00	500	P
2	5	28	SP3	HPRF	20	6.098	6.880	6.489	782.00	500	P
1	5	29	SP0	HPRF	20	6.216	6.877	6.547	661.00	500	P
1	5	29	SP1	HPRF	20	6.097	6.880	6.489	783.00	500	P
1	5	29	SP3	HPRF	20	6.100	6.696	6.398	596.00	500	P
2	5	29	SP0	HPRF	20	6.096	6.879	6.488	783.00	500	P
2	5	29	SP1	HPRF	20	6.103	6.647	6.375	544.00	500	P
2	5	29	SP3	HPRF	20	6.098	6.880	6.489	782.00	500	P
1	5	30	SP0	HPRF	20	6.102	6.683	6.393	581.00	500	P
1	5	30	SP1	HPRF	20	6.231	6.881	6.556	650.00	500	P
1	5	30	SP3	HPRF	20	6.100	6.686	6.393	586.00	500	P
2	5	30	SP0	HPRF	20	6.209	6.876	6.543	667.00	500	P
2	5	30	SP1	HPRF	20	6.098	6.880	6.489	782.00	500	P
2	5	30	SP3	HPRF	20	6.193	6.877	6.535	684.00	500	P
1	5	31	SP0	HPRF	20	6.251	6.881	6.566	630.00	500	P
1	5	31	SP1	HPRF	20	6.097	6.881	6.489	784.00	500	P
1	5	31	SP3	HPRF	20	6.208	6.878	6.543	670.00	500	P
2	5	31	SP0	HPRF	20	6.193	6.877	6.535	684.00	500	P
2	5	31	SP1	HPRF	20	6.193	6.877	6.535	684.00	500	P
2	5	31	SP3	HPRF	20	6.097	6.880	6.489	783.00	500	P
1	5	32	SP0	HPRF	20	6.098	6.666	6.382	568.00	500	P
1	5	32	SP1	HPRF	20	6.099	6.881	6.490	782.00	500	P
1	5	32	SP3	HPRF	20	6.100	6.881	6.491	781.00	500	P
2	5	32	SP0	HPRF	20	6.096	6.879	6.488	783.00	500	P
2	5	32	SP1	HPRF	20	6.204	6.877	6.541	673.00	500	P
2	5	32	SP3	HPRF	20	6.097	6.880	6.489	783.00	500	P

Table 7-2. UWB 10dB Bandwidth Summary [Channel 5]

FCC ID: A3LSMG996U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset		Page 12 of 120

Bandwidth Results

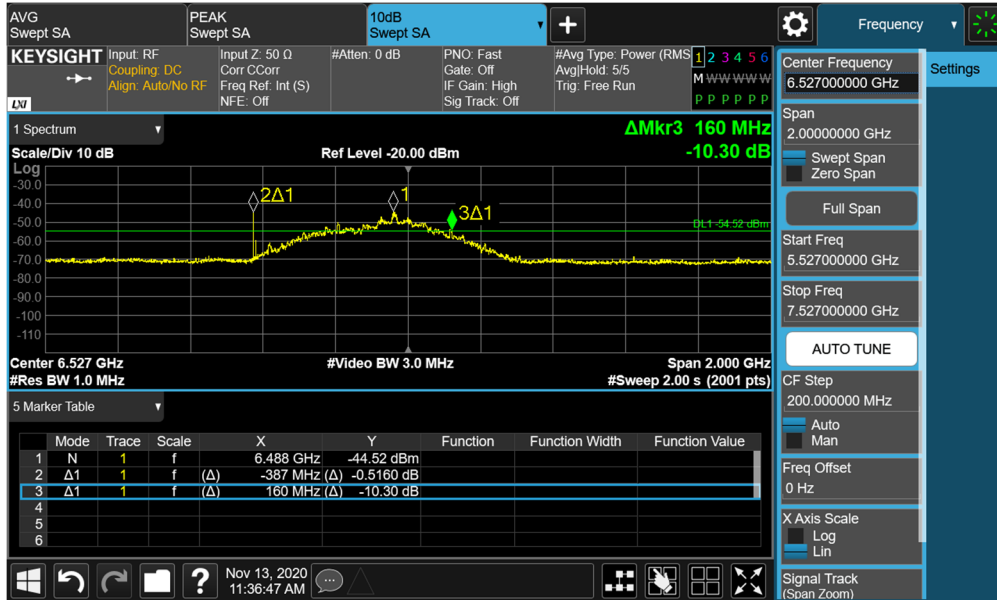

Plot 7-1. BANDWIDTH Plot – ANT1 - CH.5 - SP0 – Preamble 9



Plot 7-2. BANDWIDTH Plot – ANT1 - CH.5 – SP1 – Preamble 9

FCC ID: A3LSMG996U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset		Page 13 of 120



Plot 7-3. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 9




Plot 7-4. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 9

FCC ID: A3LSMG996U	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset		Page 14 of 120




Plot 7-5. BANDWIDTH Plot – ANT2 - CH.5 – SP1 – Preamble 9

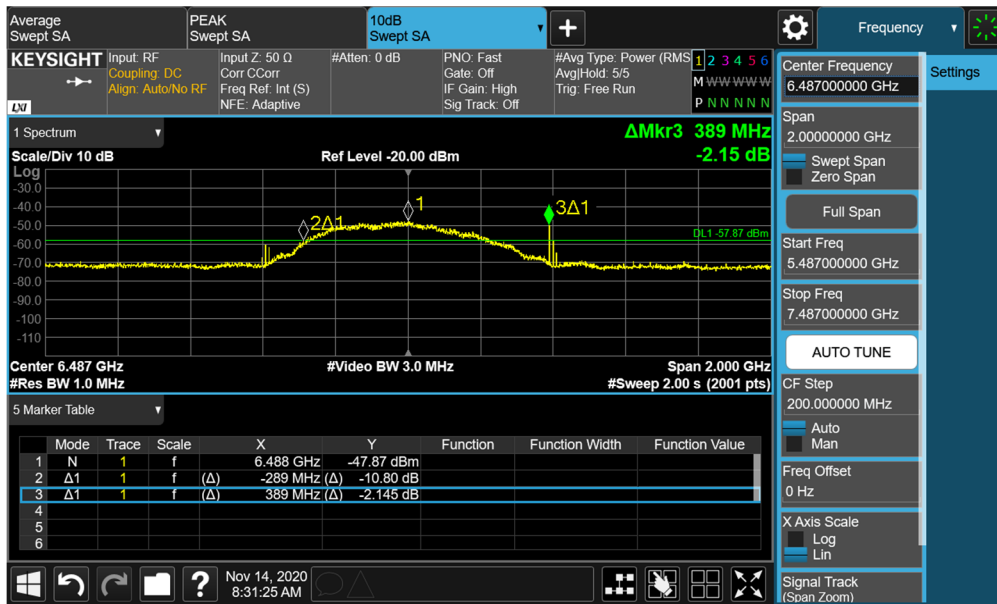


Plot 7-6. BANDWIDTH Plot – ANT2 - CH.5 – SP3 – Preamble 9

FCC ID: A3LSMG996U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset		Page 15 of 120

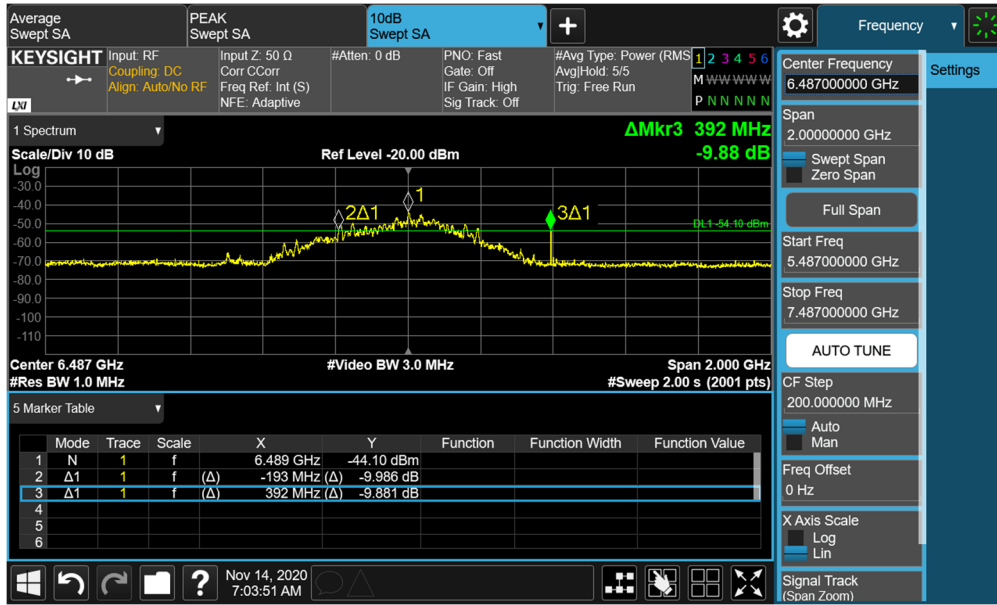

Plot 7-7. BANDWIDTH Plot – ANT1 - CH.5 - SP0 – Preamble 10

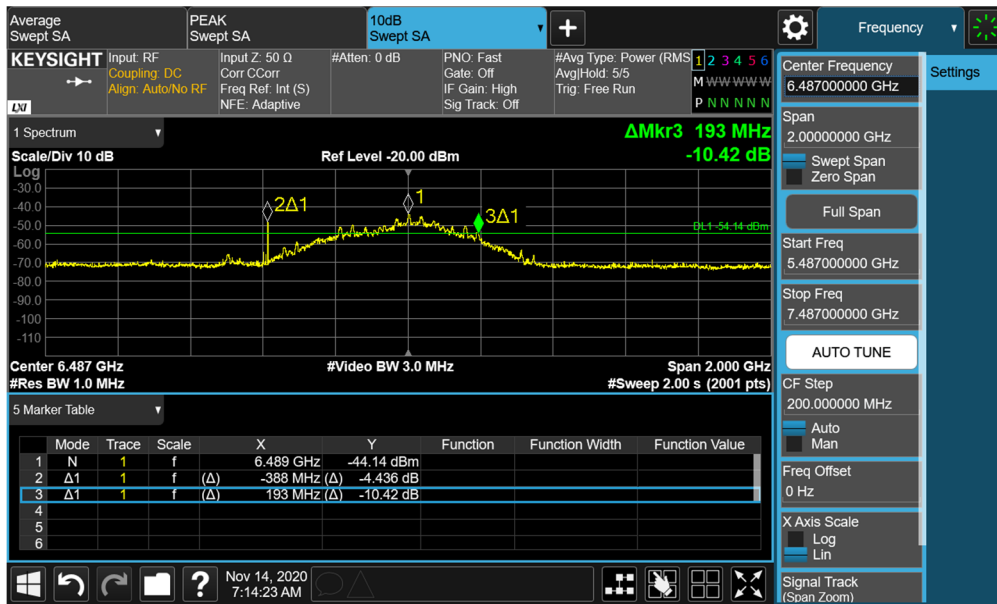


Plot 7-8. BANDWIDTH Plot – ANT1 - CH.5 – SP1 – Preamble 10

FCC ID: A3LSMG996U	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset		Page 16 of 120




Plot 7-9. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 10

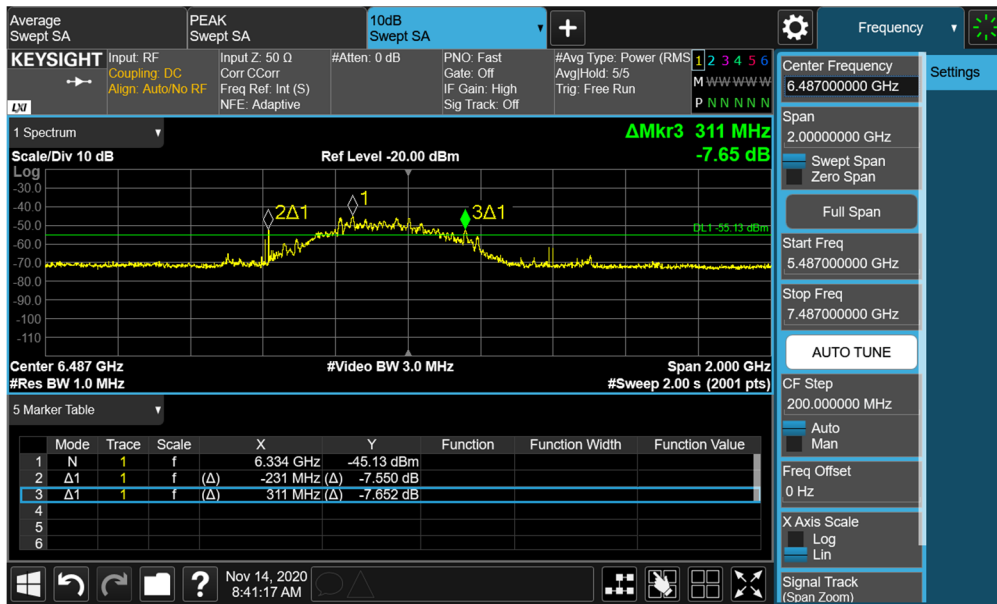


Plot 7-10. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 10

FCC ID: A3LSMG996U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset		Page 17 of 120

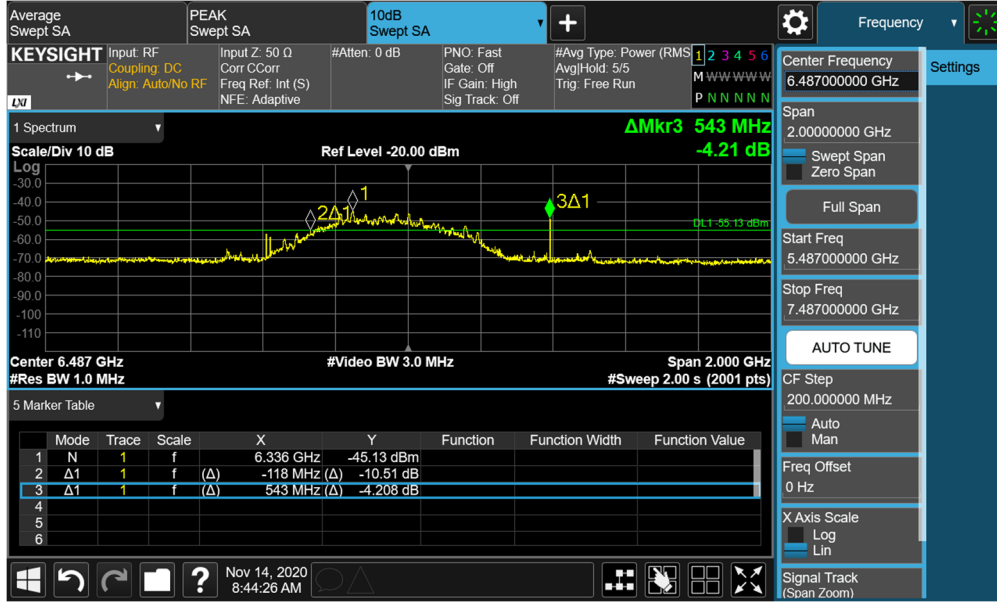

Plot 7-11. BANDWIDTH Plot – ANT2 - CH.5 – SP1 – Preamble 10

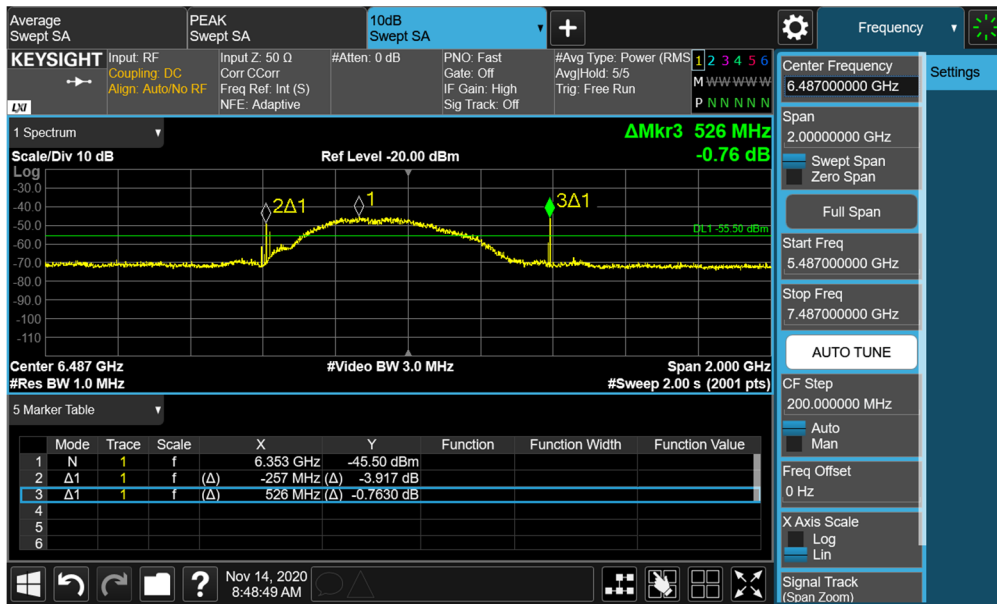

Plot 7-12. BANDWIDTH Plot – ANT2 - CH.5 – SP3 – Preamble 10

FCC ID: A3LSMG996U	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2009140143-29.A3L	Test Dates: 09/15 - 11/10/2020	EUT Type: Portable Handset		Page 18 of 120