



## MEASUREMENT REPORT FCC Part 15F ULTRA WIDEBAND

**Applicant Name:**

Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**

9/28/2020-12/04/2020

**Test Site/Location:**

PCTEST Lab. Columbia, MD, USA

**Test Report Serial No.:**

1M2009280154-28.A3L

<b>FCC ID:</b>	<b>A3LSMG998B</b>
<b>APPLICANT:</b>	<b>Samsung Electronics Co., Ltd.</b>

**Application Type:**

Certification

**Model:**

SM-G998B/DS

**Additional Models:**

SM-G998B

**EUT Type:**

Portable Handset

**FCC Classification:**

Ultra Wideband (UWB)

**FCC Rule Parts(s):**

FCC Part 15 Subpart F (15.519, 15.521)

**UWB Classification:**


Hand-held Communication Device

**Test Procedure(s):**

ANSI C63.10-2013, KDB 393764 D01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.4-2014 (See Test Report). These measurements were performed with no deviation from the standards. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President



<b>FCC ID:</b> A3LSMG998B	 <small>Proud to be part of </small>	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2009280154-28.A3L	<b>Test Dates:</b> 9/28/2020-12/04/2020	<b>EUT Type:</b> Portable Handset	Page 1 of 120	

## TABLE OF CONTENTS

1.0	Introduction .....	3
1.1	Scope.....	3
1.2	PCTEST Test Location .....	3
1.3	Test Facility / Accreditations .....	3
2.0	PRODUCT INFORMATION .....	4
2.1	Equipment Description.....	4
2.2	Device Capabilities .....	4
2.3	Test Configuration .....	4
2.4	EMI Suppression Device(s)/Modifications.....	4
3.0	DESCRIPTION OF TESTS .....	5
3.1	Evaluation Procedure.....	5
3.2	AC Line Conducted Emissions .....	5
3.3	Radiated Emissions .....	6
3.4	Environmental Conditions .....	6
4.0	Antenna Requirements .....	7
5.0	Measurement Uncertainty .....	8
6.0	TEST EQUIPMENT CALIBRATION DATA.....	9
7.0	TEST DATA .....	10
7.1	Summary .....	10
7.2	10dB Bandwidth.....	11
7.3	Cessation Time.....	86
7.4	Peak Power and Maximum Average Emissions .....	88
7.5	Radiated Measurement Data above 960MHz.....	99
7.6	Radiated Spurious Emissions Measurements – Below 1GHz.....	113
7.7	Line Conducted Measurement Data .....	117
8.0	CONCLUSION .....	120

<b>FCC ID:</b> A3LSMG998B	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2009280154-28.A3L	<b>Test Dates:</b> 9/28/2020-12/04/2020	<b>EUT Type:</b> Portable Handset	Page 2 of 120	

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset	Page 3 of 120	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMG998B**. The test data contained in this report pertains only to the EUT's ultra wideband transmitter..

**Test Device Serial No.:** 1631M

### 2.2 Device Capabilities

This device contains the following capabilities:

50/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (n5, n66), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax(6E) UNII, Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB

### 2.3 Test Configuration

The EUT was tested per the guidance of Section 10 of ANSI C63.10-2013. The EUT setup procedures of ANSI C63.10-203 were used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Section 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups.

For more information please see Section 7.0 for test data and the test setup photos document for the test setup photographs.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset	Page 4 of 120	

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2014) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.7. The EMI Receiver mode of the Agilent MXA was used to perform AC line conducted emissions testing.

FCC ID: A3LSMG998B	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset	Page 5 of 120	

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. . An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset	Page 6 of 120	

## 4.0 ANTENNA REQUIREMENTS

Except from §15.203 of the FCC Rules/Regulations:

“An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna(s) of the EUT are permanently attached
- There are no provisions for a connection to an external antenna

The EUT complies with the requirements of §15.203.

<b>FCC ID:</b> A3LSMG998B	 <small>Proud to be part of </small>	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2009280154-28.A3L	<b>Test Dates:</b> 9/28/2020-12/04/2020	<b>EUT Type:</b> Portable Handset	Page 7 of 120	

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07

<b>FCC ID:</b> A3LSMG998B		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2009280154-28.A3L	<b>Test Dates:</b> 9/28/2020-12/04/2020	<b>EUT Type:</b> Portable Handset	Page 8 of 120	



## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Emco	3116	Horn Antenna (18 - 40GHz)	8/7/2018	Triennial	8/7/2021	9203-2178
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
ETS-Lindgren	3816/2NM	LISN	7/9/2020	Biennial	7/9/2022	114451
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY52350166
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/9/2020	Annual	1/9/2021	NMLC-2
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/10/2020	Annual	8/10/2021	103200
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	10/1/2019	Biennial	10/1/2021	310233
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol Science	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107
Rohde & Schwarz	TC-TA18	Cross-Pol Antenna 400MHz-18GHz	7/8/2020	Biennial	7/8/2022	101058

**Table 6-1. Annual Test Equipment Calibration Schedule**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 9 of 120

## 7.0 TEST DATA

### 7.1 Summary

Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMG998B  
 FCC Classification: Ultra Wideband (UWB)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
§15.503, §15.519 (b)	10dB Bandwidth	≥ 500MHz	RADIATED	PASS	Section 7.2
§15.519(a)(1)	Cessation Time	Transmission shall cease in less than 10s		PASS	Section 7.3
§15.519(e)	Maximum Peak Power	< 0dBm EIRP in 50MHz BW		PASS	Section 7.4
§15.519(c)	Maximum Average Emission in the range of 3100 – 10600 MHz	< -41.3 EIRP in dBm		PASS	Section 7.4
§15.519(c)	Radiated Emissions Above 960MHz	See table in 15.519(c) for details		PASS	Section 7.4, 7.5
§15.519(d)	Radiated Emissions in the 1164 – 1240Mhz and 1559 – 1610MHz GPS Bands	< -85.3 EIRP in dBm		PASS	Section 7.5
§15.519(c), §15.519(a)	Radiate Emissions Below 960MHz	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.6
§15.207	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen)	LINE CONDUCTED	PASS	Section 7.7

**Table 7-1. Summary of Test Results**

**Note:**

The equipment was capable of operating on two antennas in two separate modes [HPRF and BPRF] as well as with different preambles. Care was taken to ensure the worst case modes were investigated and reported.

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset	Page 10 of 120	

## 7.2 10dB Bandwidth

§15.503(a), §15.519(b)

### Test Overview and Limit

Per the definition of 15.503, the UWB Bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna.

**The 10dB bandwidth of the UWB signal must remain fully within the 3100 – 10,600MHz band. The 10dB bandwidth of the UWB signal must also be greater than or equal to 500MHz.**

### Test Procedures Used

ANSI C63.10-2013 Section 10.1

### Test Settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Detector = Peak
4. Span was set wide enough to capture the 10dB points of the signal
5. Trace mode = max hold
6. Sweep = 2s
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument and Measurement Setup**



FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset	Page 11 of 120	

ANT	CH	Preamble Id	CONFIG	Mode	FL [GHz]	FH [GHz]	fM [GHz]	BW [MHz]	Min BW [MHz]	Pass/Fail
1	5	9	SP0	BPRF	6.099	6.882	6.490	783.50	500	P
1	5	9	SP1	BPRF	6.198	6.744	6.471	546.00	500	P
1	5	9	SP3	BPRF	6.189	6.704	6.447	515.00	500	P
2	5	9	SP0	BPRF	6.093	6.886	6.490	793.00	500	P
2	5	9	SP1	BPRF	6.099	6.882	6.490	782.50	500	P
2	5	9	SP3	BPRF	6.199	6.752	6.476	553.00	500	P
1	5	10	SP0	BPRF	6.179	6.682	6.431	503.00	500	P
1	5	10	SP1	BPRF	6.193	6.693	6.443	500.00	500	P
1	5	10	SP3	BPRF	6.189	6.700	6.445	511.00	500	P
2	5	10	SP0	BPRF	6.295	6.876	6.586	581.00	500	P
2	5	10	SP1	BPRF	6.098	6.883	6.490	785.00	500	P
2	5	10	SP3	BPRF	6.179	6.842	6.511	663.00	500	P
1	5	11	SP0	BPRF	6.188	6.693	6.441	505.00	500	P
1	5	11	SP1	BPRF	6.192	6.708	6.450	516.00	500	P
1	5	11	SP3	BPRF	6.184	6.709	6.447	525.00	500	P
2	5	11	SP0	BPRF	6.093	6.876	6.485	783.00	500	P
2	5	11	SP1	BPRF	6.099	6.881	6.490	782.50	500	P
2	5	11	SP3	BPRF	6.218	6.748	6.483	530.00	500	P
1	5	12	SP0	BPRF	6.181	6.695	6.438	514.00	500	P
1	5	12	SP1	BPRF	6.180	6.686	6.433	506.00	500	P
1	5	12	SP3	BPRF	6.194	6.878	6.536	684.00	500	P
2	5	12	SP0	BPRF	6.103	6.885	6.494	782.00	500	P
2	5	12	SP1	BPRF	6.194	6.880	6.537	686.00	500	P
2	5	12	SP3	BPRF	6.205	6.749	6.477	544.00	500	P
1	5	25	SP0	HPRF	6.221	6.741	6.481	520.00	500	P
1	5	25	SP1	HPRF	6.103	6.886	6.494	783.00	500	P
1	5	25	SP3	HPRF	6.192	6.699	6.446	507.00	500	P
2	5	25	SP0	HPRF	6.232	6.793	6.513	561.00	500	P
2	5	25	SP1	HPRF	6.103	6.886	6.494	783.00	500	P
2	5	25	SP3	HPRF	6.147	6.847	6.497	700.00	500	P
1	5	26	SP0	HPRF	6.207	6.743	6.475	536.00	500	P
1	5	26	SP1	HPRF	6.197	6.699	6.448	502.00	500	P
1	5	26	SP3	HPRF	6.193	6.694	6.444	501.00	500	P
2	5	26	SP0	HPRF	6.219	6.876	6.548	657.00	500	P
2	5	26	SP1	HPRF	6.102	6.886	6.494	784.00	500	P
2	5	26	SP3	HPRF	6.177	6.752	6.465	575.00	500	P
1	5	27	SP0	HPRF	6.199	6.704	6.452	505.00	500	P
1	5	27	SP1	HPRF	6.192	6.693	6.443	501.00	500	P
1	5	27	SP3	HPRF	6.194	6.707	6.451	513.00	500	P
2	5	27	SP0	HPRF	6.222	6.794	6.508	572.00	500	P
2	5	27	SP1	HPRF	6.102	6.887	6.495	785.00	500	P
2	5	27	SP3	HPRF	6.102	6.886	6.494	784.00	500	P
1	5	28	SP0	HPRF	6.191	6.694	6.443	503.00	500	P
1	5	28	SP1	HPRF	6.194	6.707	6.451	513.00	500	P
1	5	28	SP3	HPRF	6.191	6.693	6.442	502.00	500	P
2	5	28	SP0	HPRF	6.102	6.834	6.468	732.00	500	P
2	5	28	SP1	HPRF	6.098	6.883	6.490	785.00	500	P
2	5	28	SP3	HPRF	6.099	6.882	6.490	782.50	500	P
1	5	29	SP0	HPRF	6.205	6.743	6.474	538.00	500	P
1	5	29	SP1	HPRF	6.196	6.698	6.447	502.00	500	P
1	5	29	SP3	HPRF	6.193	6.698	6.446	505.00	500	P
2	5	29	SP0	HPRF	6.207	6.876	6.542	669.00	500	P
2	5	29	SP1	HPRF	6.100	6.882	6.491	782.50	500	P
2	5	29	SP3	HPRF	6.100	6.883	6.491	782.50	500	P
1	5	30	SP0	HPRF	6.192	6.744	6.468	552.00	500	P
1	5	30	SP1	HPRF	6.189	6.698	6.444	509.00	500	P
1	5	30	SP3	HPRF	6.177	6.698	6.438	521.00	500	P
2	5	30	SP0	HPRF	6.219	6.886	6.553	667.00	500	P
2	5	30	SP1	HPRF	6.101	6.884	6.492	783.00	500	P
2	5	30	SP3	HPRF	6.098	6.883	6.490	785.00	500	P
1	5	31	SP0	HPRF	6.194	6.702	6.448	508.00	500	P
1	5	31	SP1	HPRF	6.194	6.697	6.446	503.00	500	P
1	5	31	SP3	HPRF	6.191	6.707	6.449	516.00	500	P
2	5	31	SP0	HPRF	6.103	6.886	6.494	783.50	500	P
2	5	31	SP1	HPRF	6.102	6.885	6.493	783.50	500	P
2	5	31	SP3	HPRF	6.098	6.881	6.489	783.50	500	P
1	5	32	SP0	HPRF	6.207	6.745	6.476	538.00	500	P
1	5	32	SP1	HPRF	6.193	6.698	6.446	505.00	500	P
1	5	32	SP3	HPRF	6.194	6.707	6.451	513.00	500	P
2	5	32	SP0	HPRF	6.099	6.882	6.490	782.50	500	P
2	5	32	SP1	HPRF	6.102	6.877	6.489	774.50	500	P
2	5	32	SP3	HPRF	6.102	6.887	6.494	784.50	500	P


Table 7-2. UWB 10dB Bandwidth Summary [Channel 5]

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 12 of 120


### Bandwidth Results

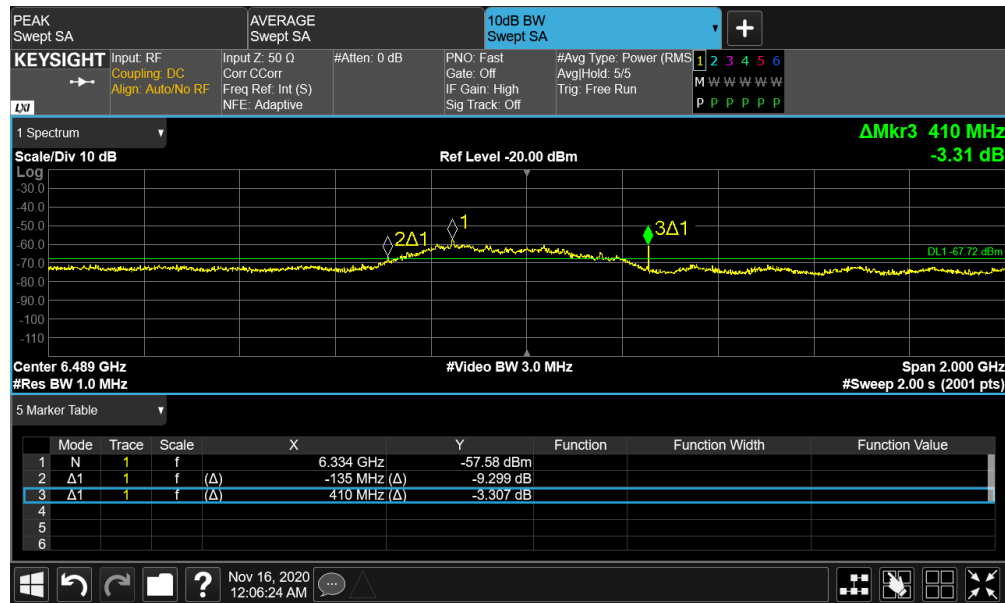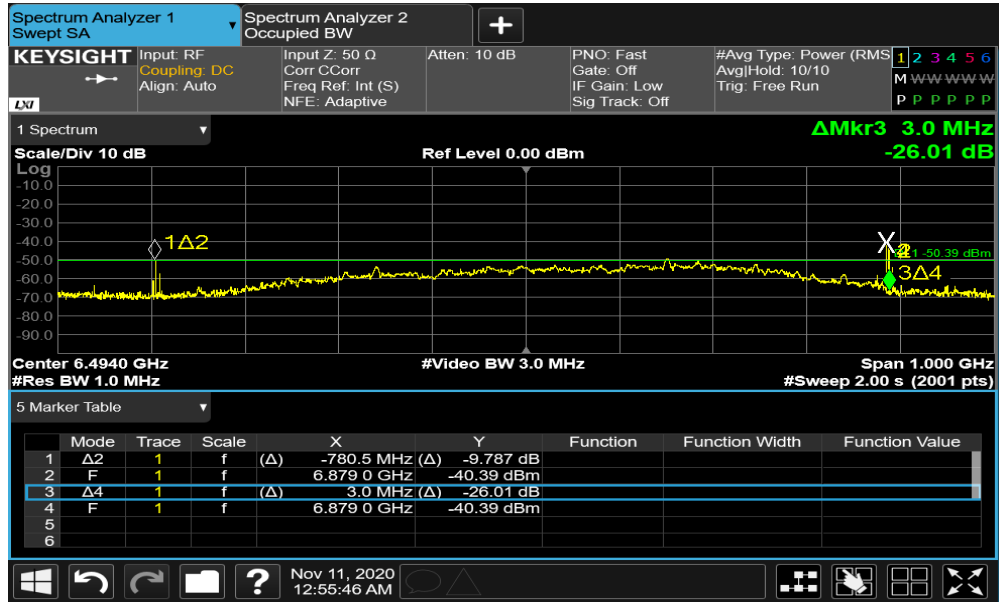

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 13 of 120

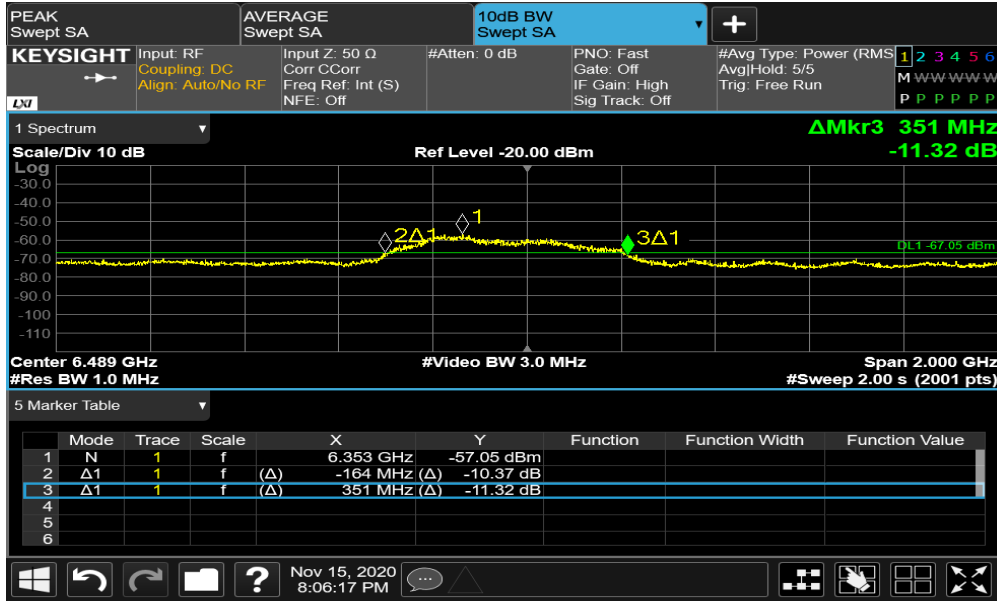


Plot 7-3. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 9

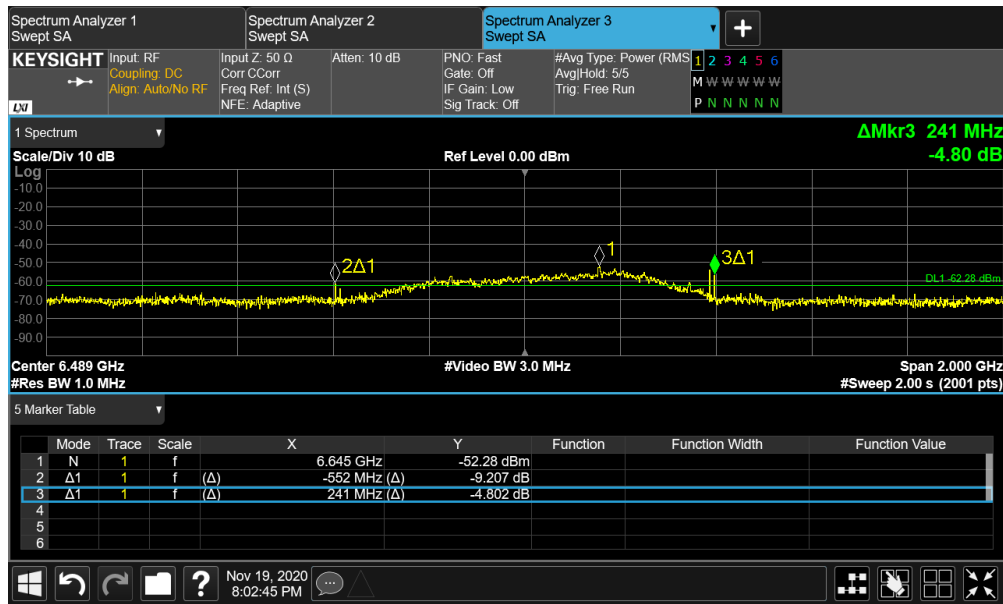


Plot 7-4. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 9

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 14 of 120

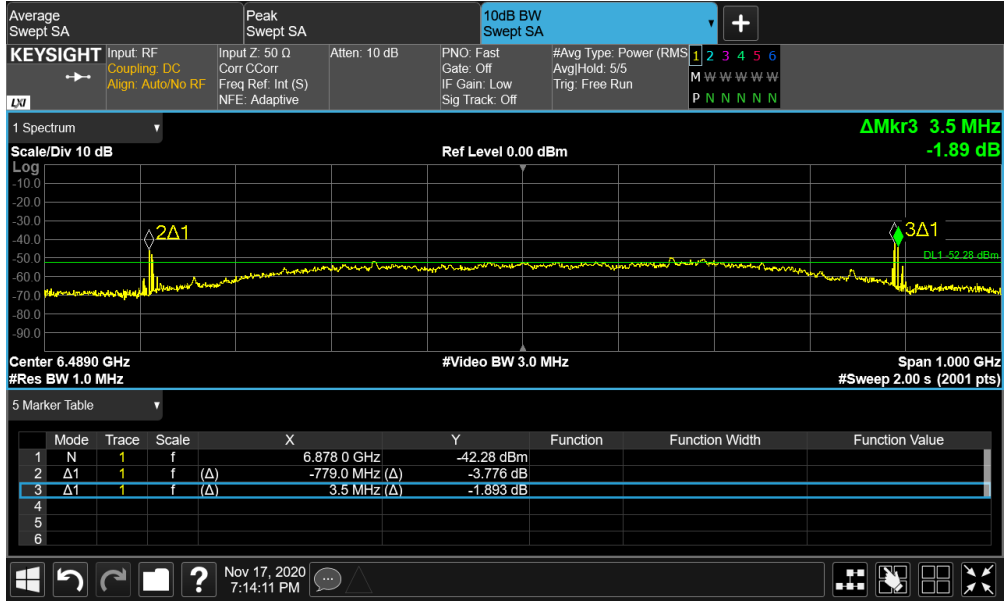


**Plot 7-5. BANDWIDTH Plot – ANT2 - CH.5 – SP1 – Preamble 9**

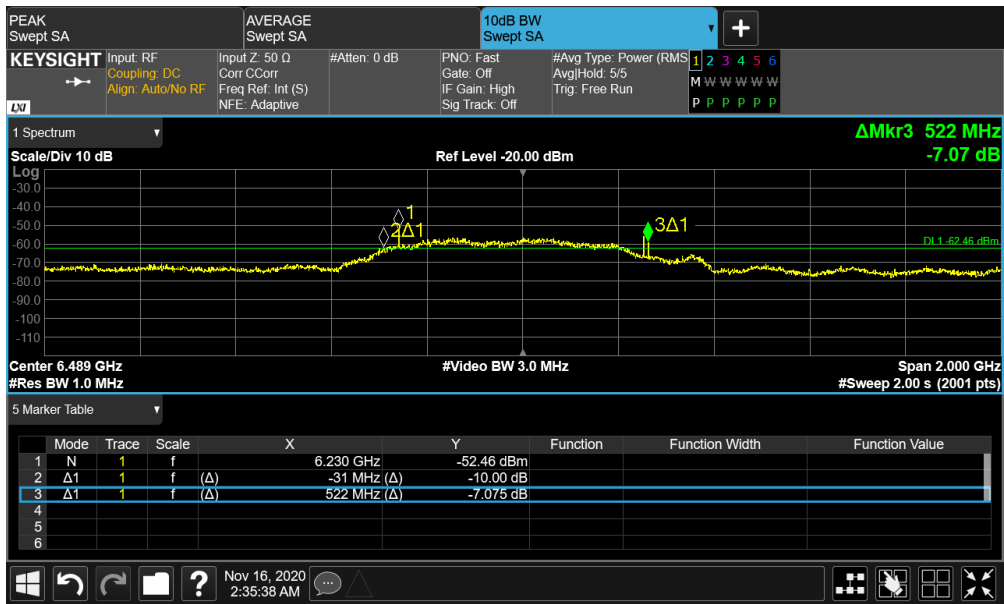


**Plot 7-6. BANDWIDTH Plot – ANT2 - CH.5 – SP3 – Preamble 9**

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 15 of 120

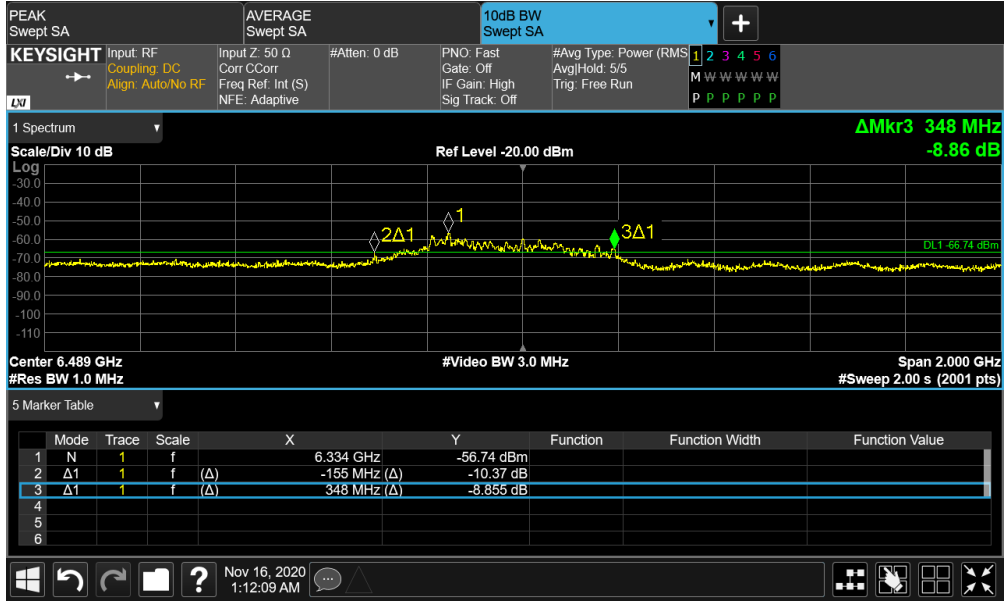


**Plot 7-7. BANDWIDTH Plot – ANT1 - CH.5 - SP0 – Preamble 10**

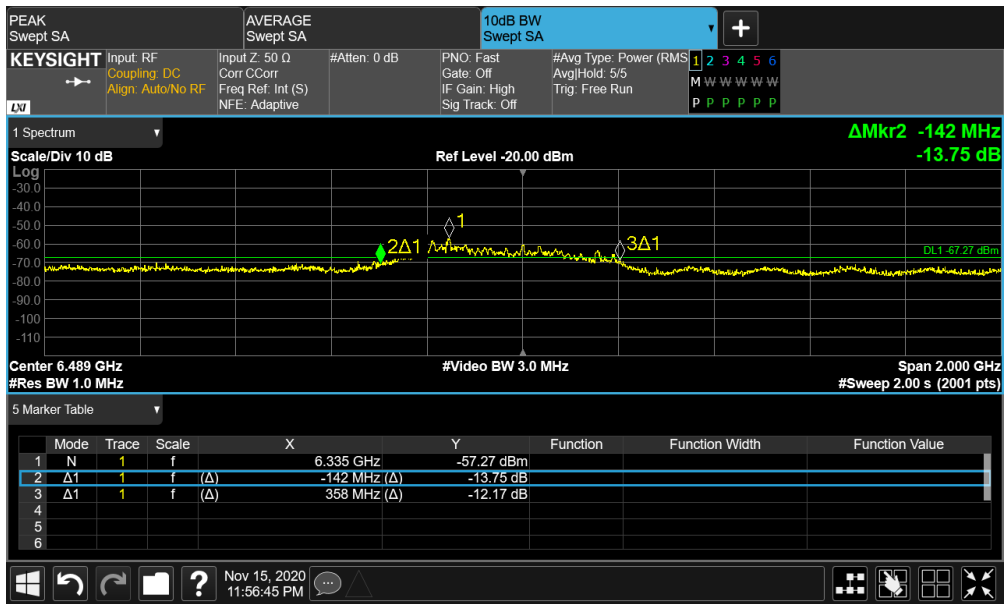


**Plot 7-8. BANDWIDTH Plot – ANT1 - CH.5 – SP1 – Preamble 10**

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 16 of 120




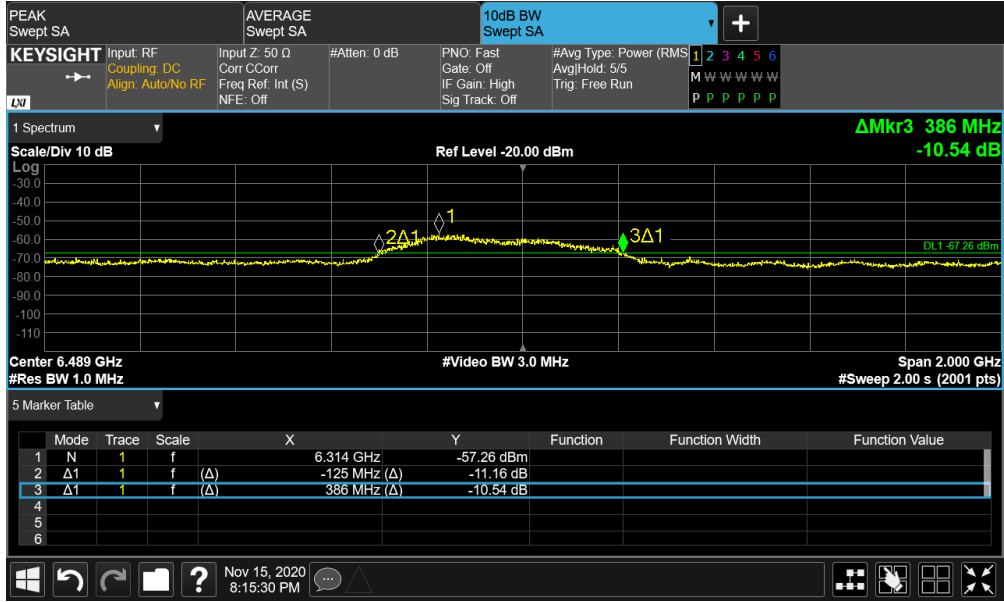


**Plot 7-9. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 10**

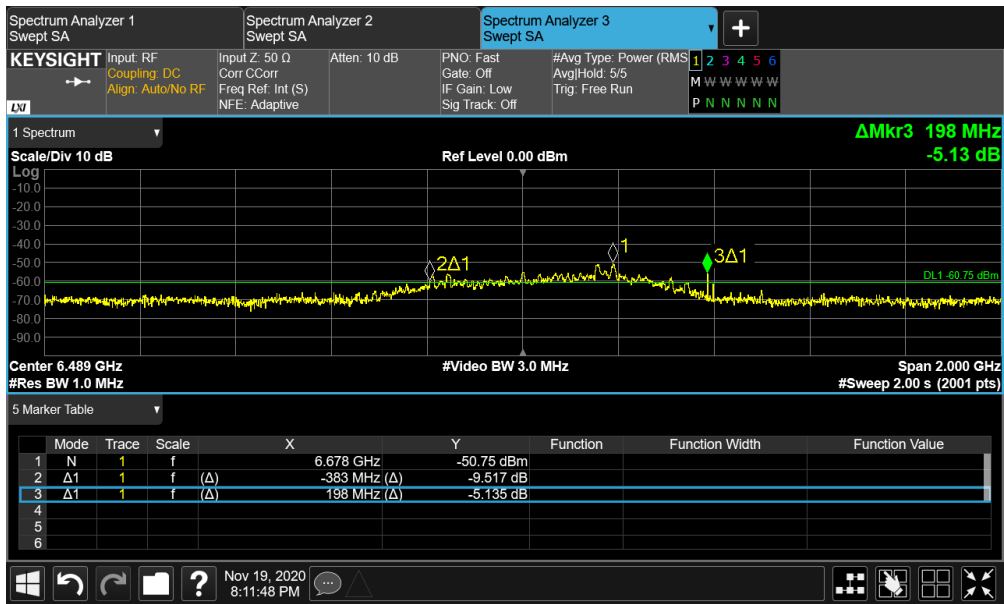


**Plot 7-10. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 10**


FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 17 of 120

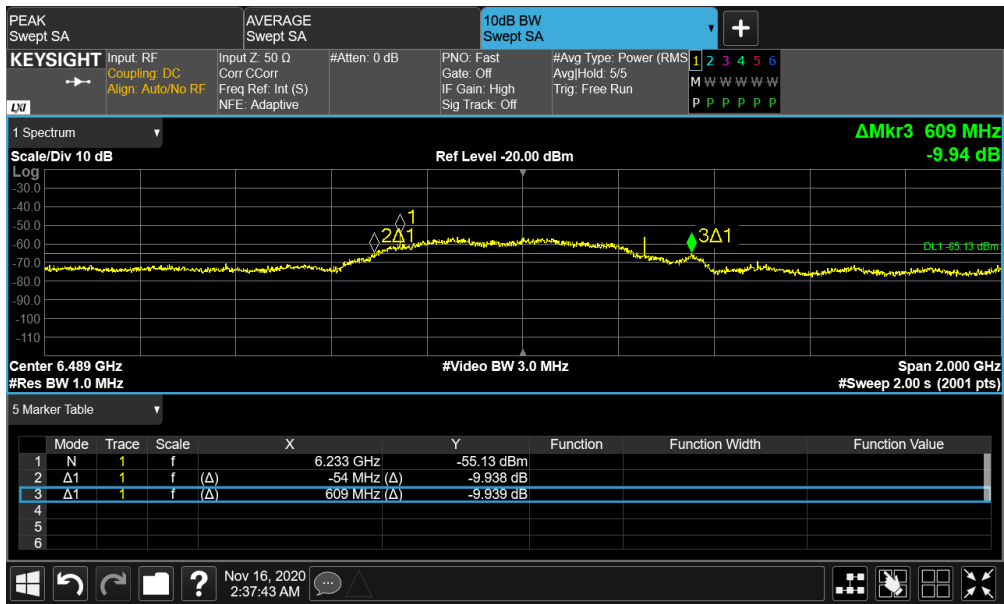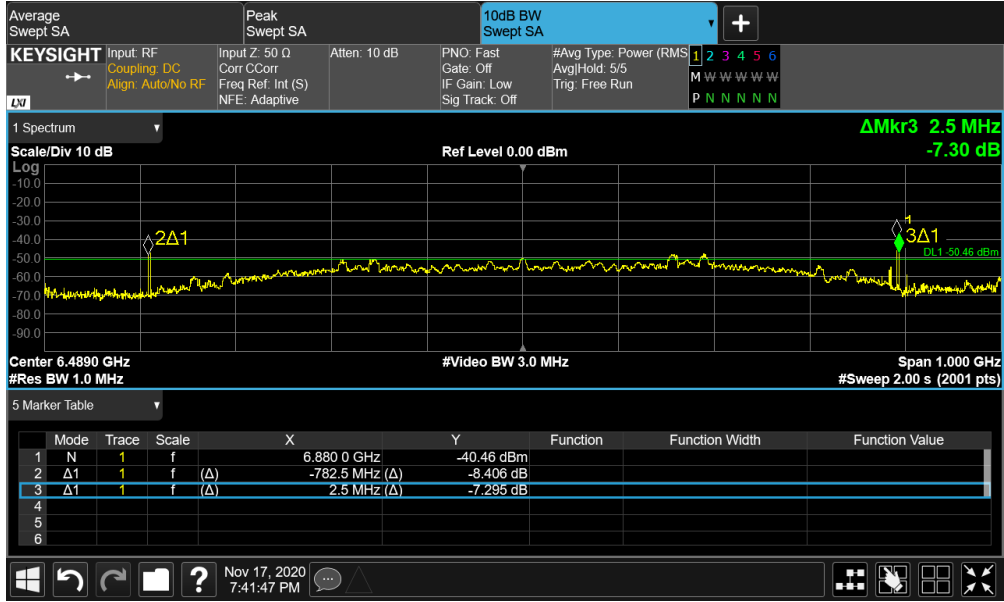

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 18 of 120

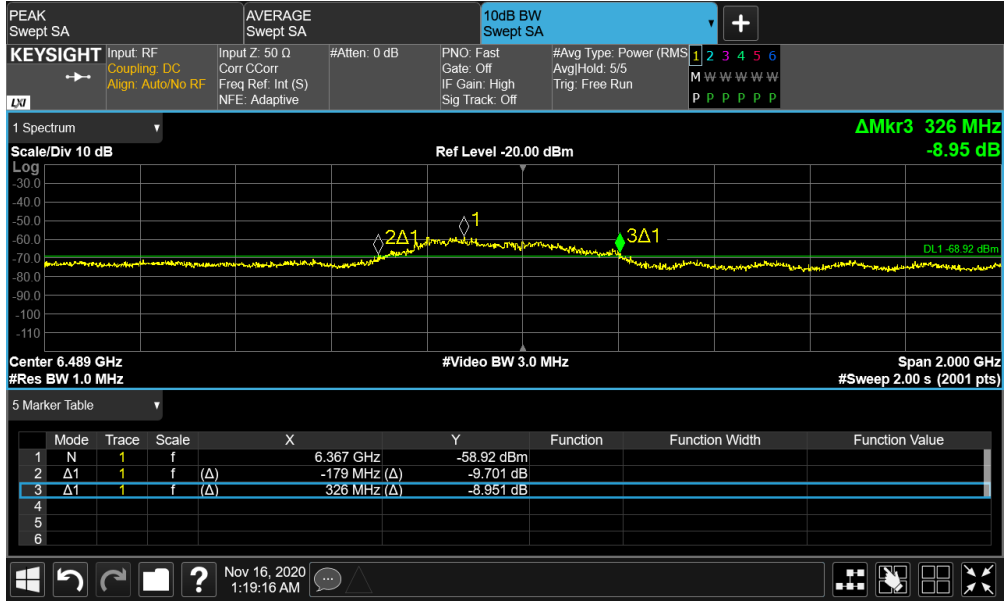


Plot 7-13. BANDWIDTH Plot – ANT1 - CH.5 - SP0 – Preamble 11

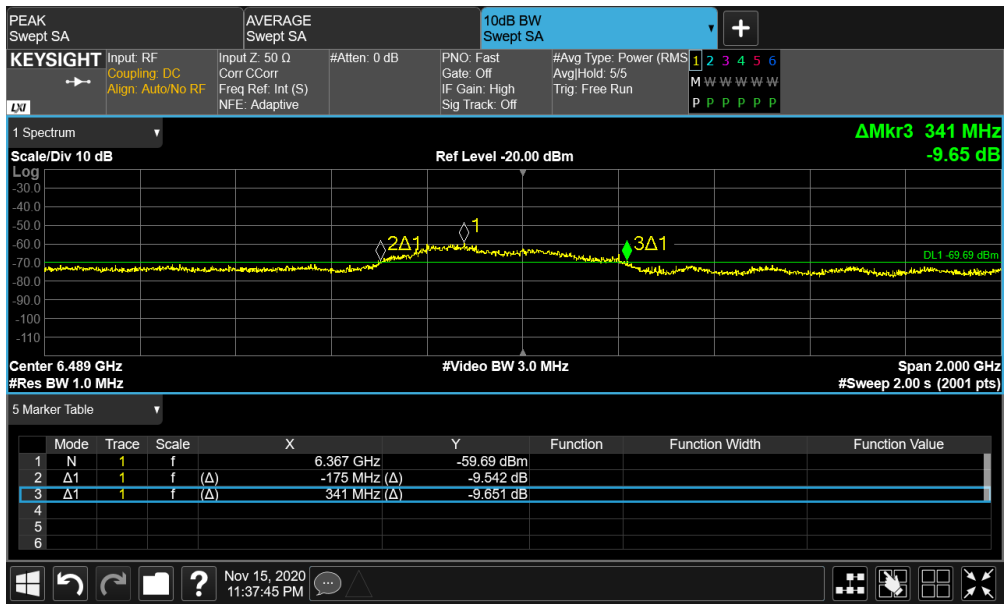


Plot 7-14. BANDWIDTH Plot – ANT1 - CH.5 – SP1 – Preamble 11

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 19 of 120

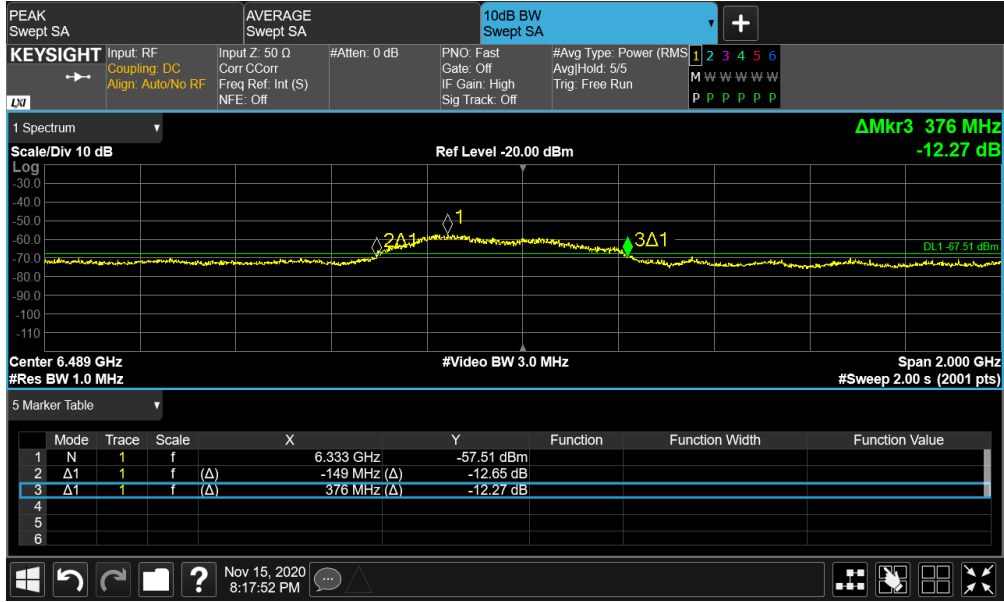


Plot 7-15. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 11

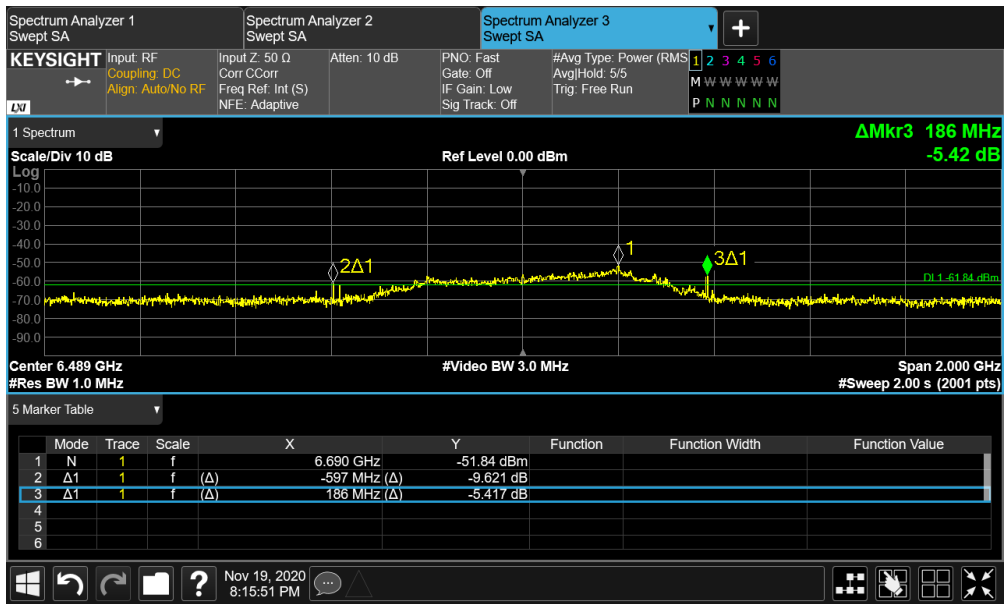


Plot 7-16. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 11

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 20 of 120

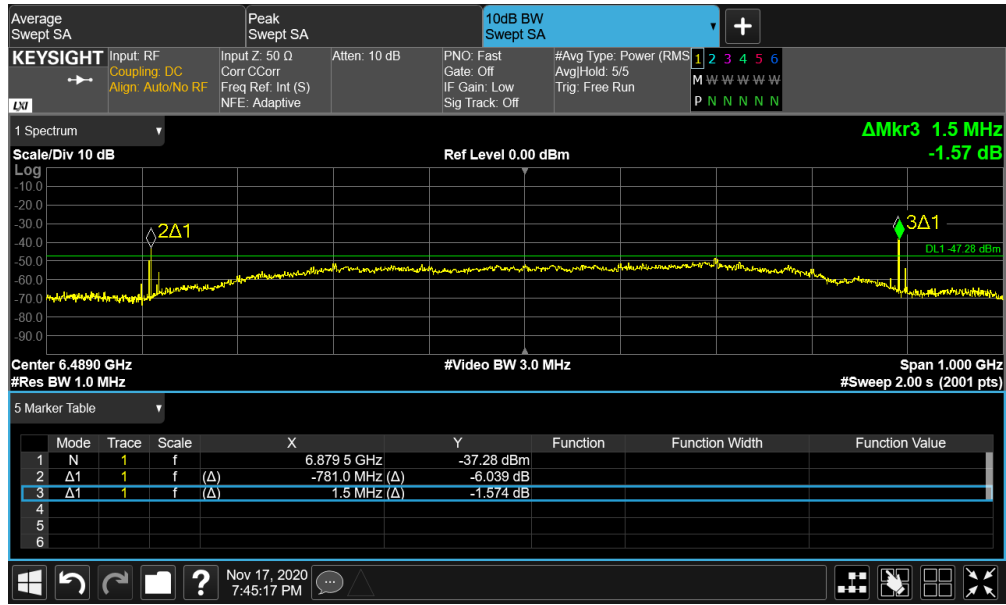


Plot 7-17. BANDWIDTH Plot – ANT2 - CH.5 – SP1 – Preamble 11

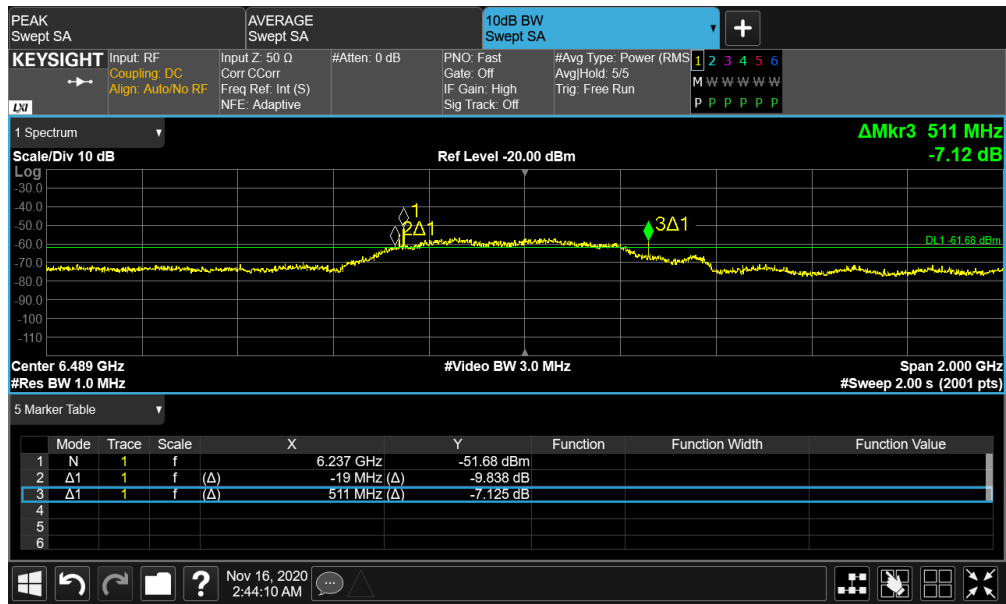


Plot 7-18. BANDWIDTH Plot – ANT2 - CH.5 – SP3 – Preamble 11

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 21 of 120

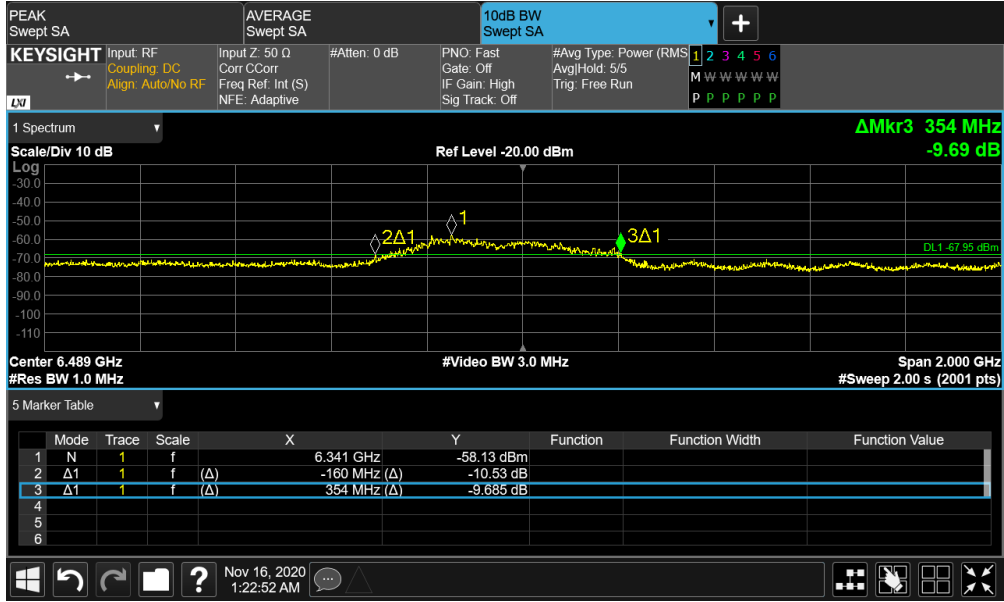


Plot 7-19. BANDWIDTH Plot – ANT1 - CH.5 - SP0 – Preamble 12

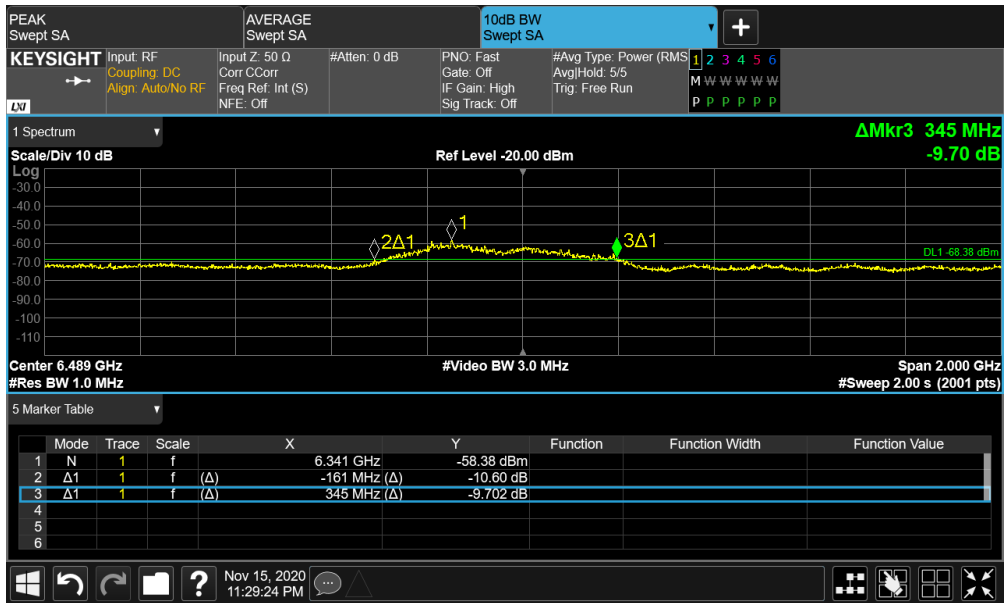


Plot 7-20. BANDWIDTH Plot – ANT1 - CH.5 – SP1 – Preamble 12

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 22 of 120




Plot 7-21. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 12

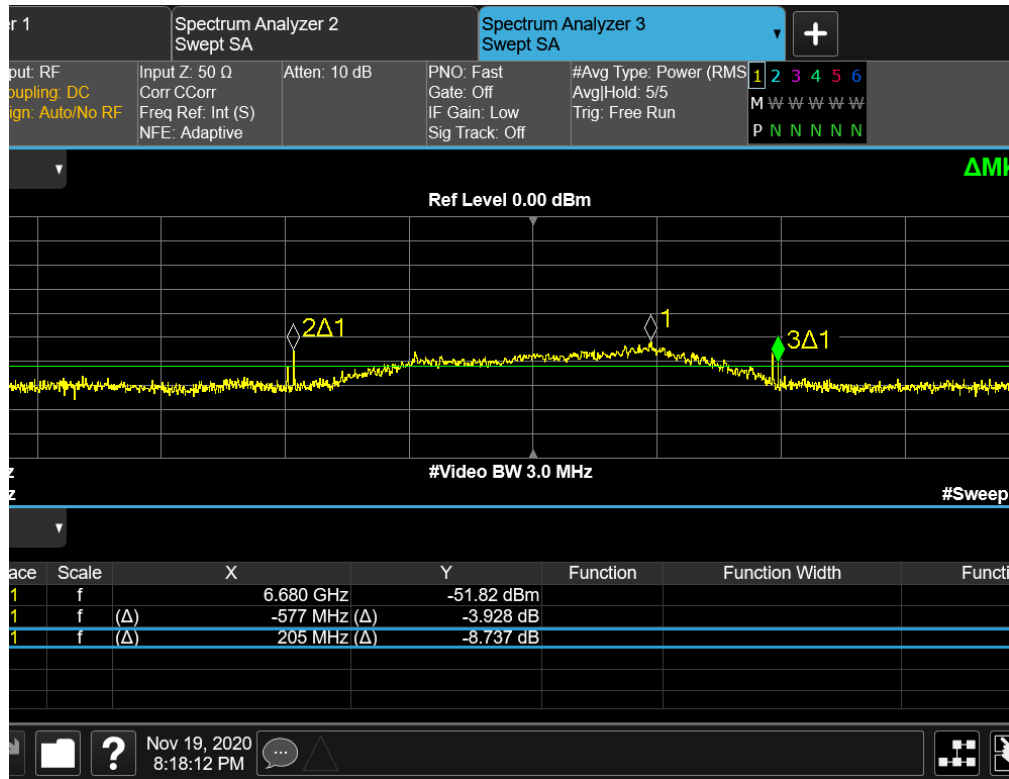


Plot 7-22. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 12

FCC ID: A3LSMG998B	<b>PCTEST</b> Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 23 of 120




Plot 7-23. BANDWIDTH Plot – ANT2 - CH.5 – SP1 – Preamble 12

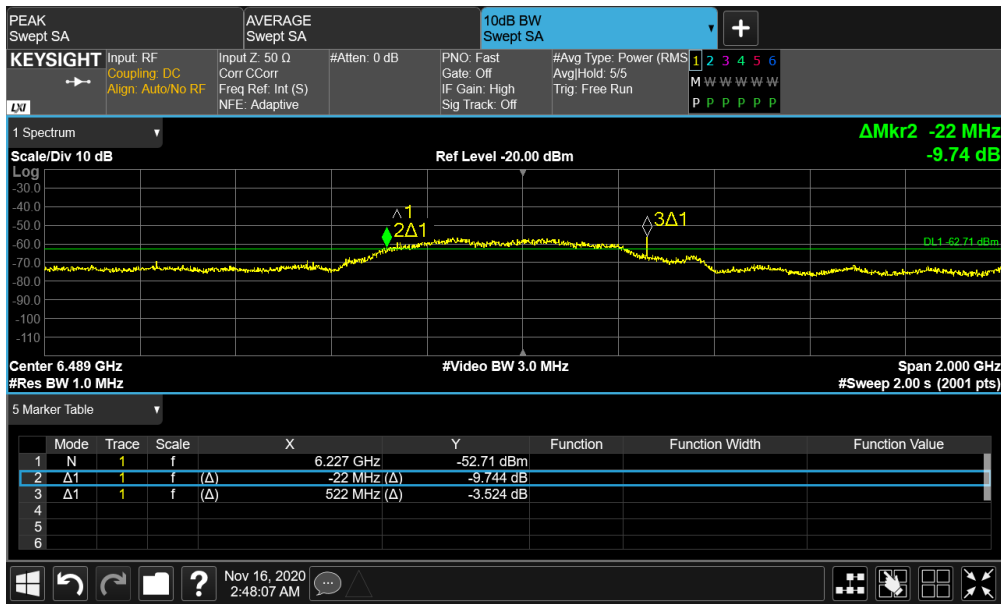


Plot 7-24. BANDWIDTH Plot – ANT2 - CH.5 – SP3 – Preamble 12

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 24 of 120



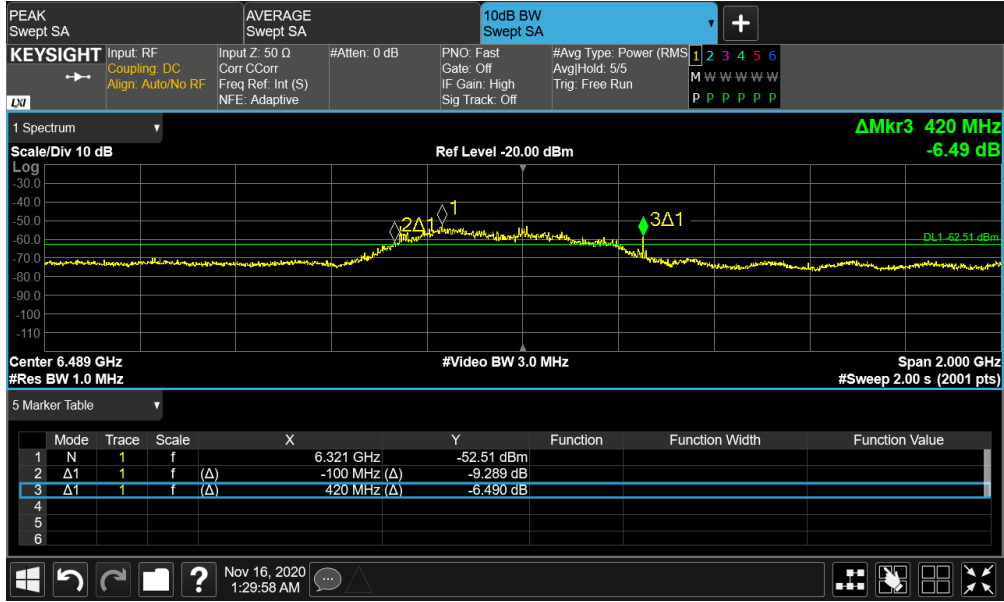


Plot 7-25. BANDWIDTH Plot – ANT1 - CH.5 - SP0 – Preamble 25

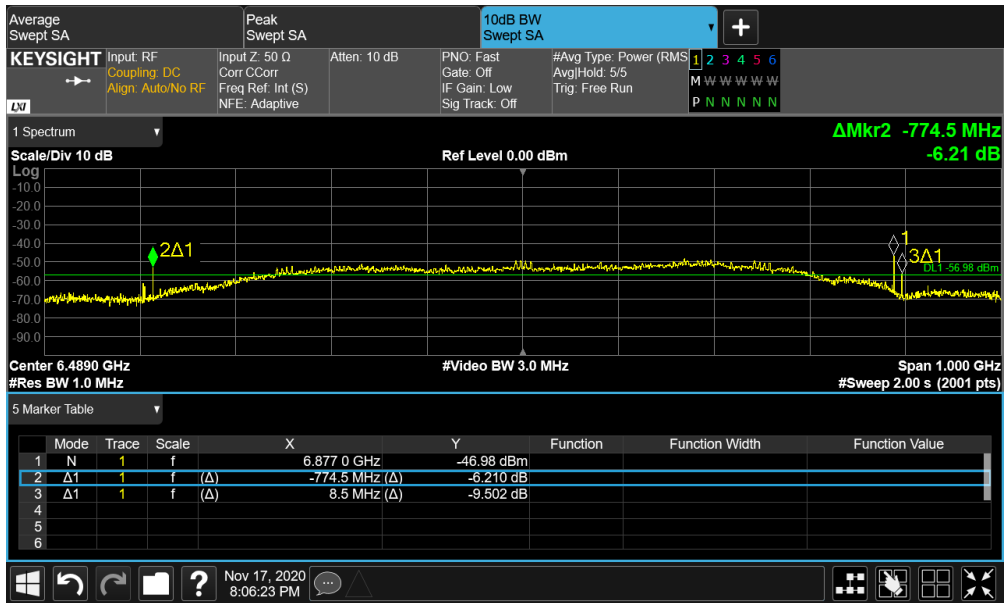


Plot 7-26. BANDWIDTH Plot – ANT1 - CH.5 – SP1 – Preamble 25

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 25 of 120


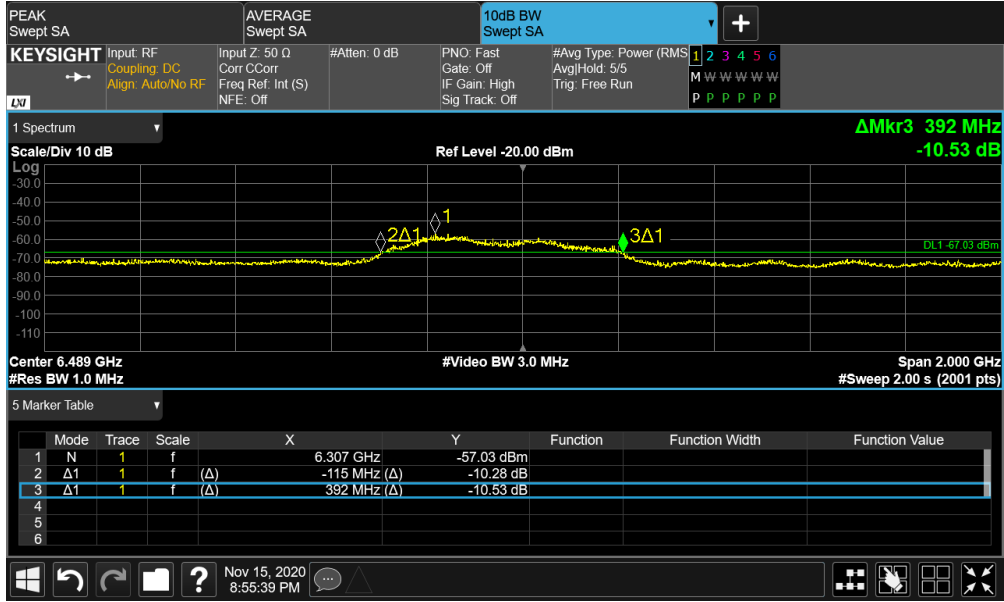


Plot 7-27. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 25

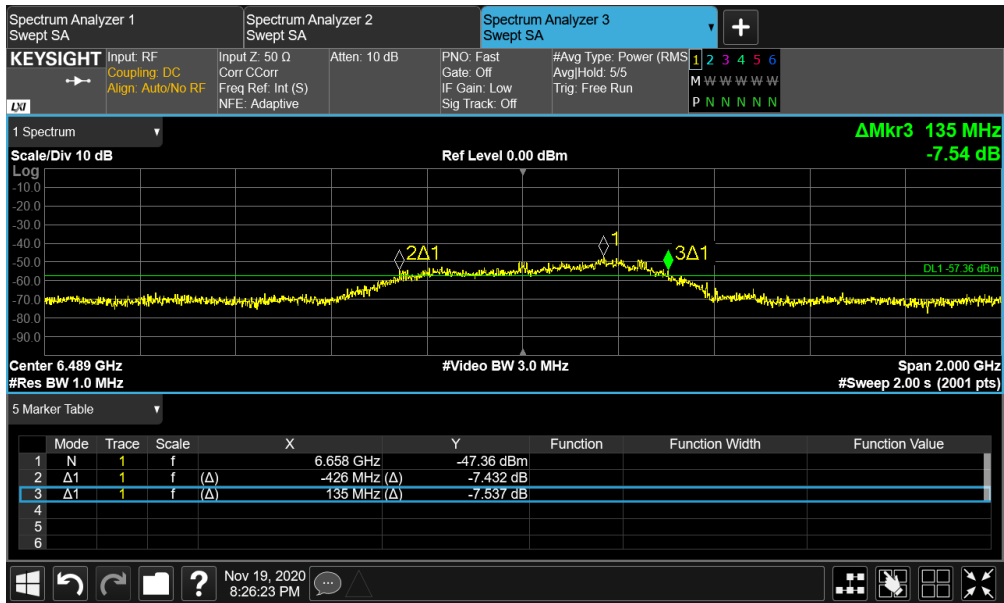


Plot 7-28. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 25


FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 26 of 120

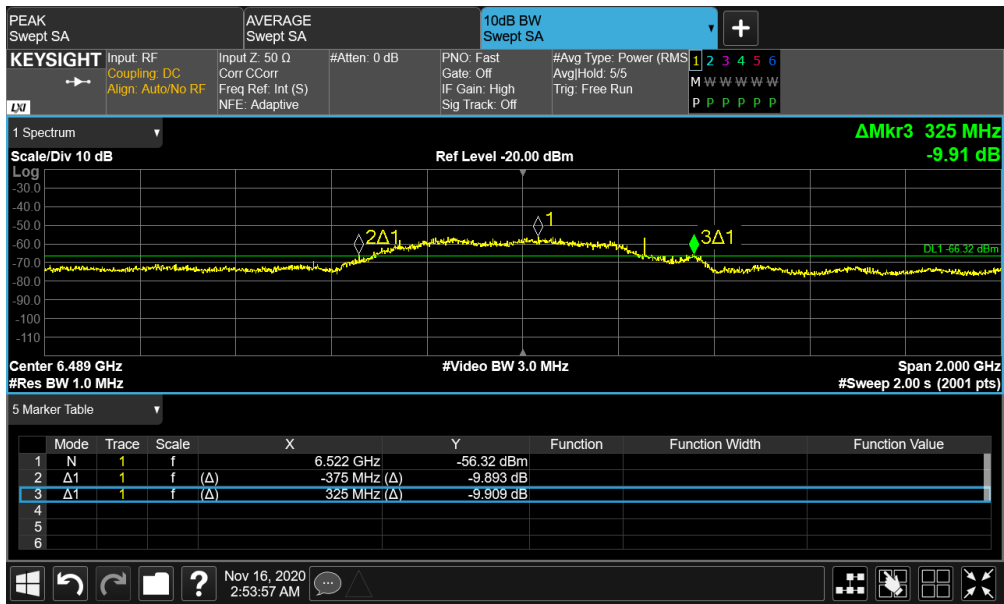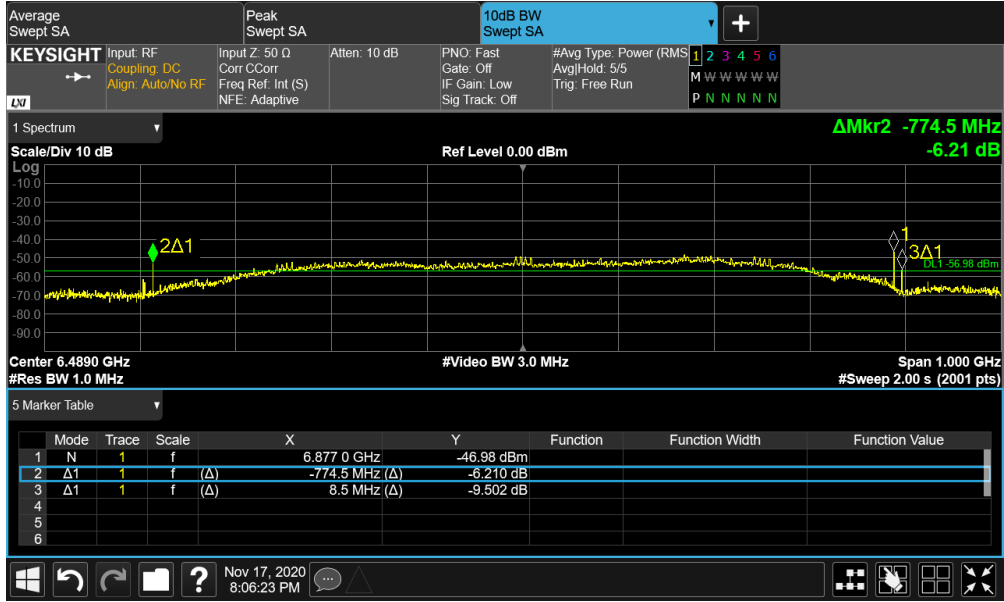

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 27 of 120

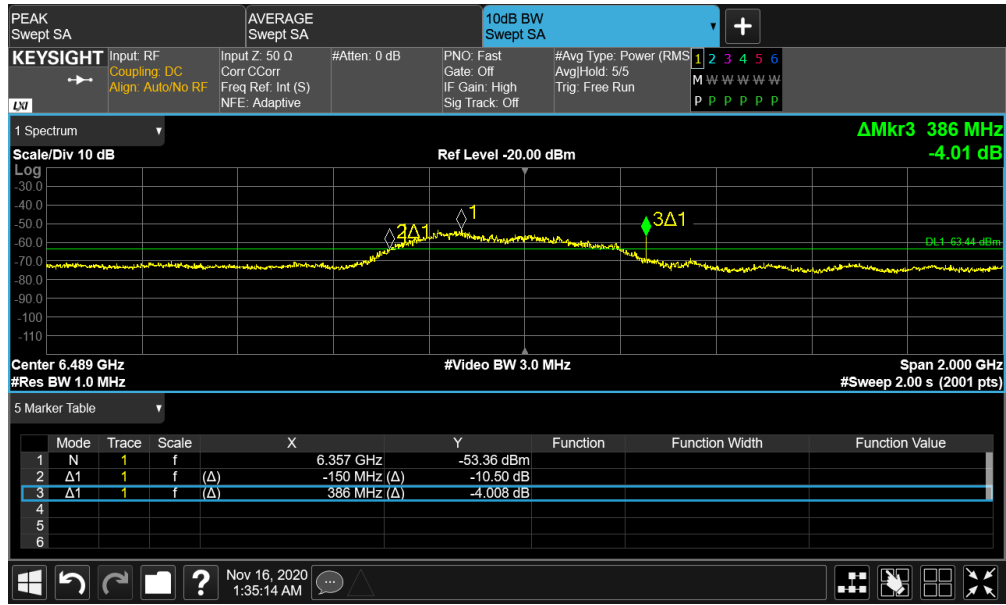


Plot 7-31. BANDWIDTH Plot – ANT1 - CH.5 - SP0 – Preamble 26

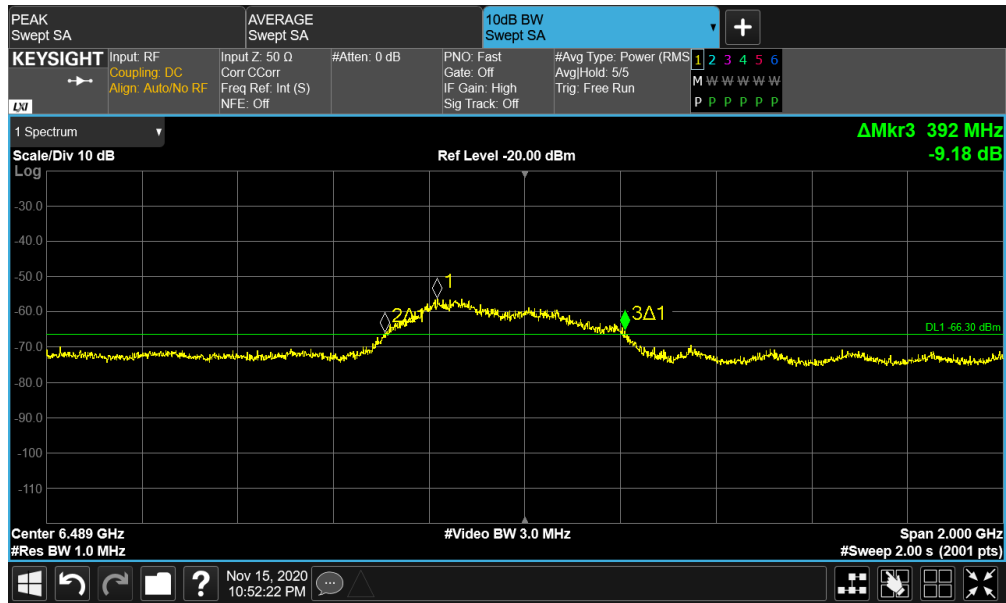


Plot 7-32. BANDWIDTH Plot – ANT1 - CH.5 – SP1 – Preamble 26

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 28 of 120

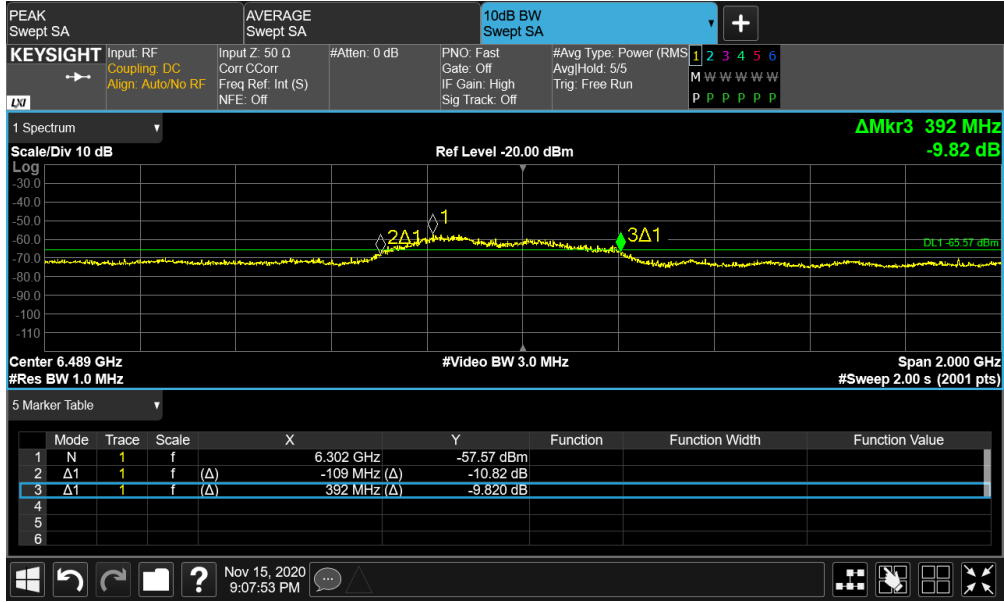


**Plot 7-33. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 26**

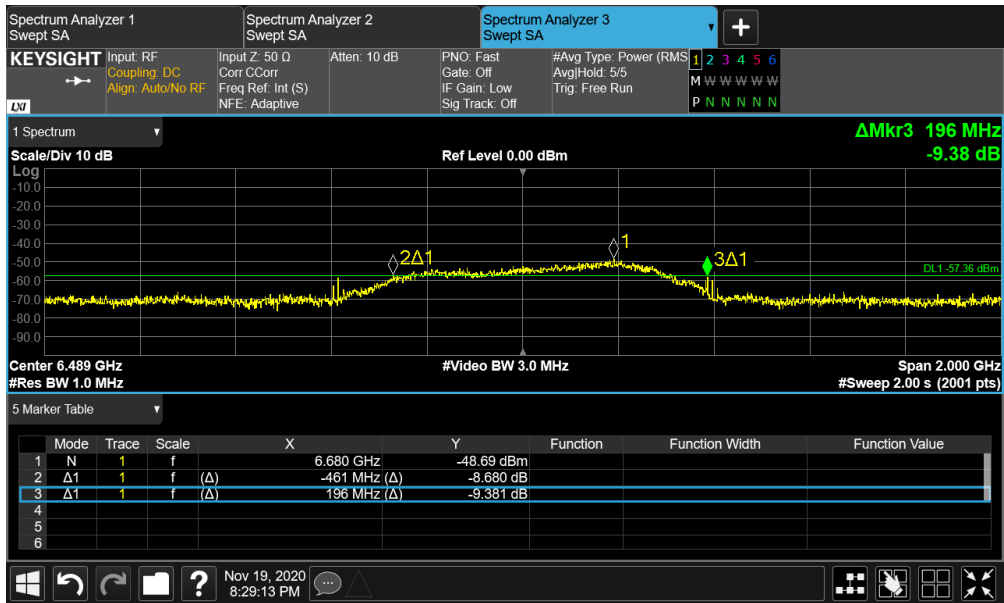


**Plot 7-34. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 26**

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 29 of 120

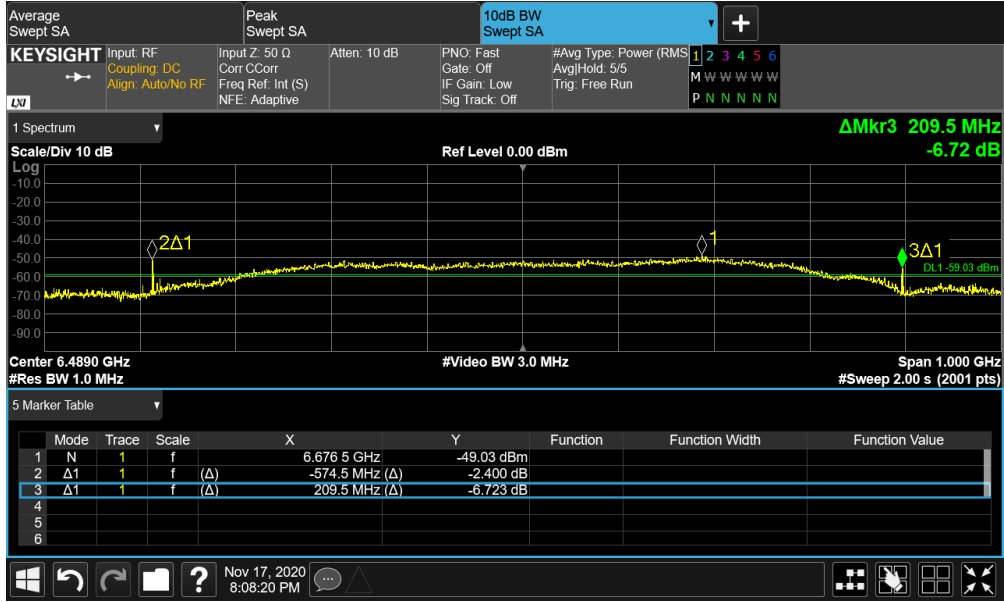


**Plot 7-35. BANDWIDTH Plot – ANT2 - CH.5 – SP1 – Preamble 26**

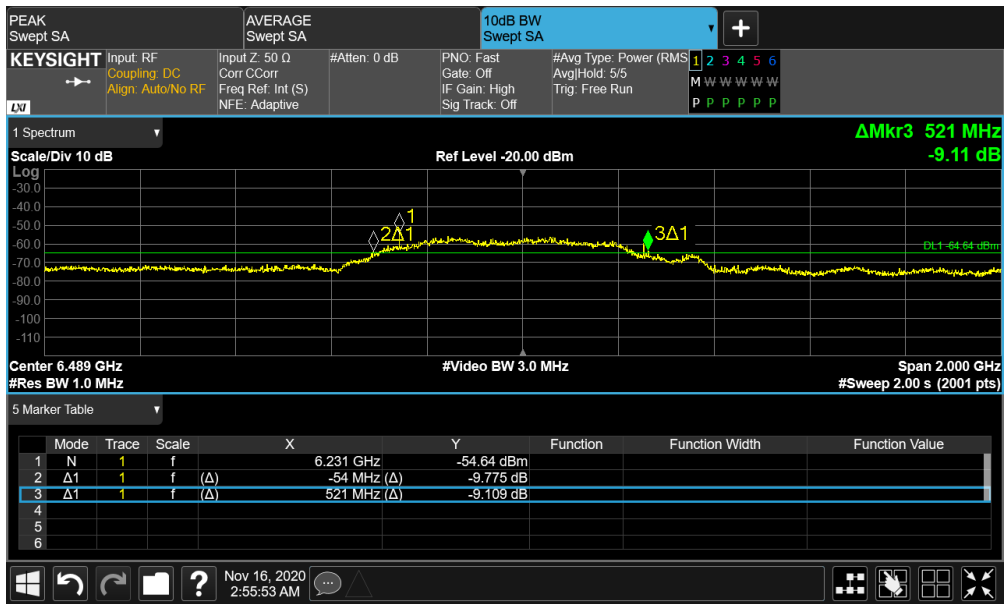


**Plot 7-36. BANDWIDTH Plot – ANT2 - CH.5 – SP3 – Preamble 26**

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 30 of 120

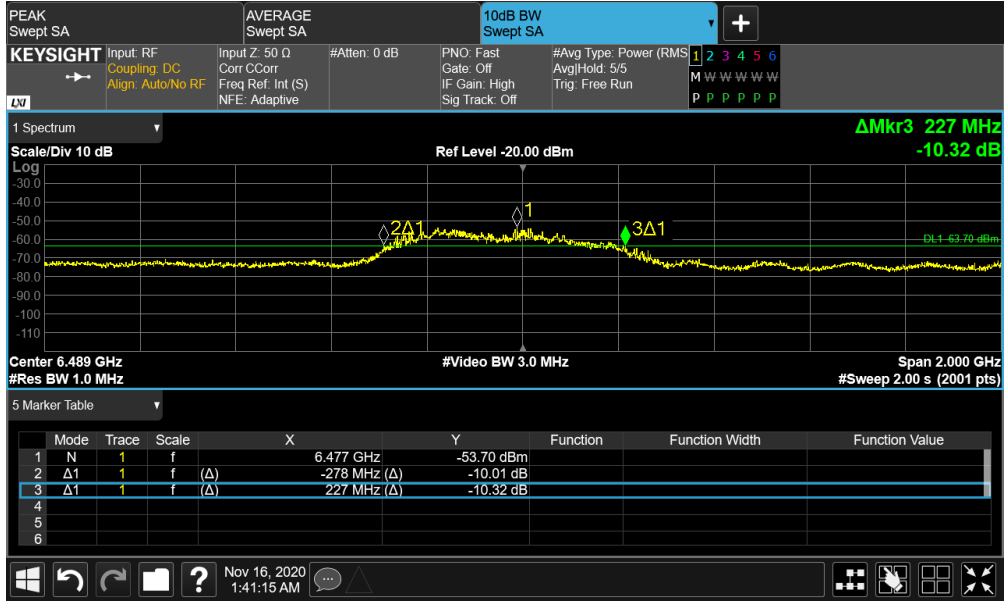


Plot 7-37. BANDWIDTH Plot – ANT1 - CH.5 - SP0 – Preamble 27

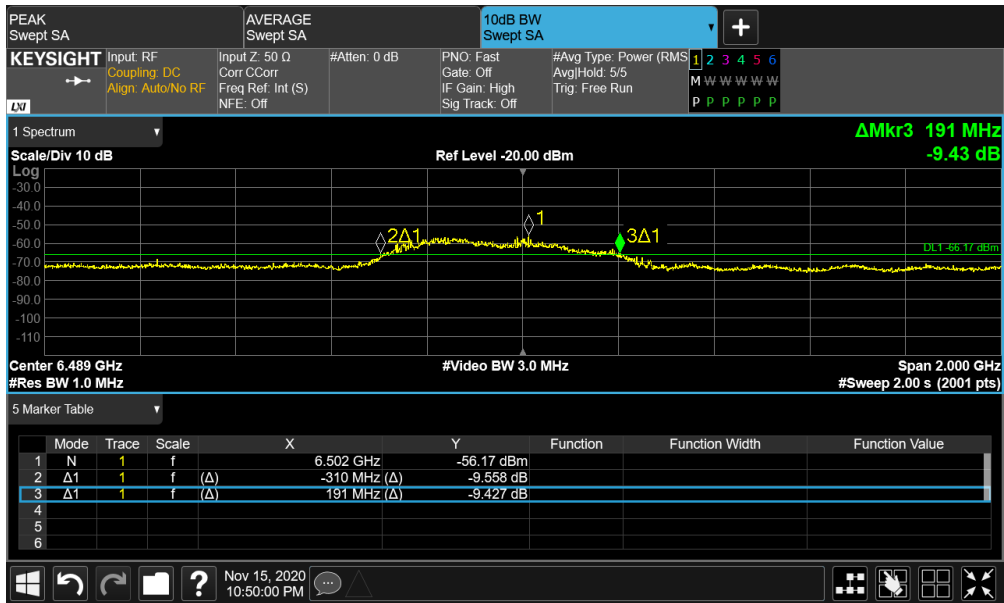


Plot 7-38. BANDWIDTH Plot – ANT1 - CH.5 – SP1 – Preamble 27

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 31 of 120

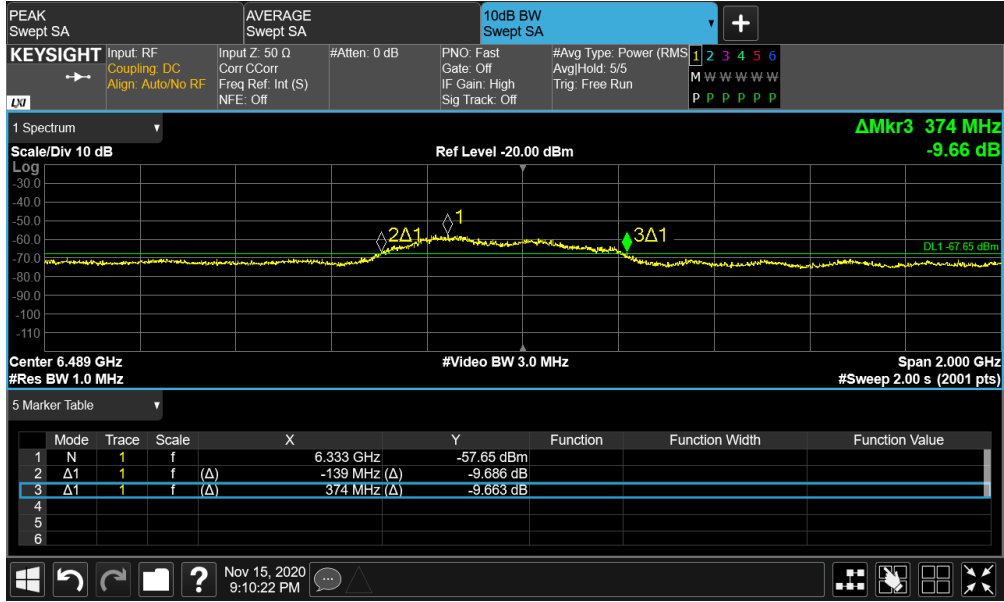


Plot 7-39. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 27

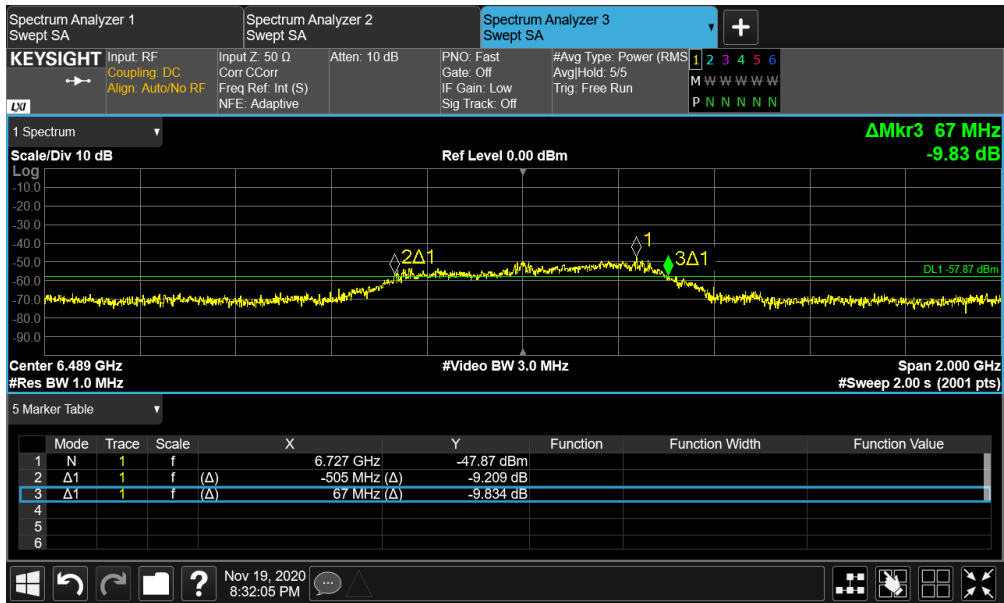


Plot 7-40. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 27

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 32 of 120



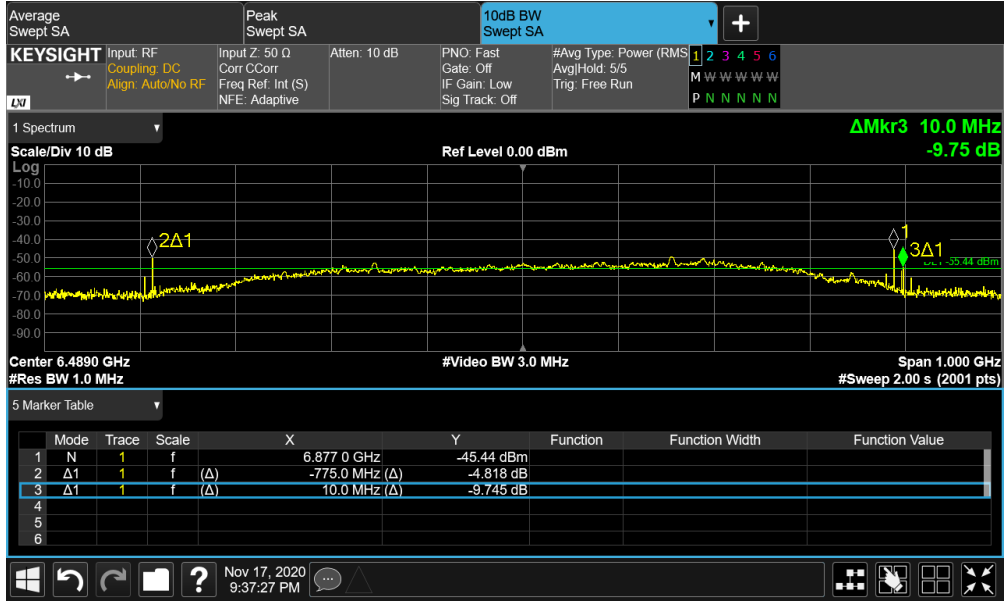


**Plot 7-41. BANDWIDTH Plot – ANT2 - CH.5 – SP1 – Preamble 27**

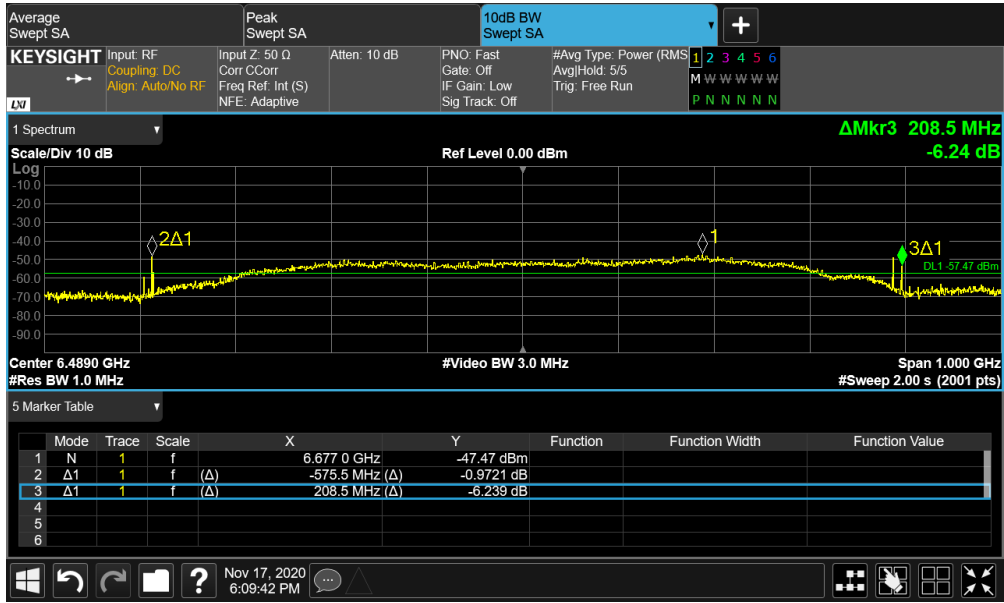


**Plot 7-42. BANDWIDTH Plot – ANT2 - CH.5 – SP3 – Preamble 27**

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 33 of 120

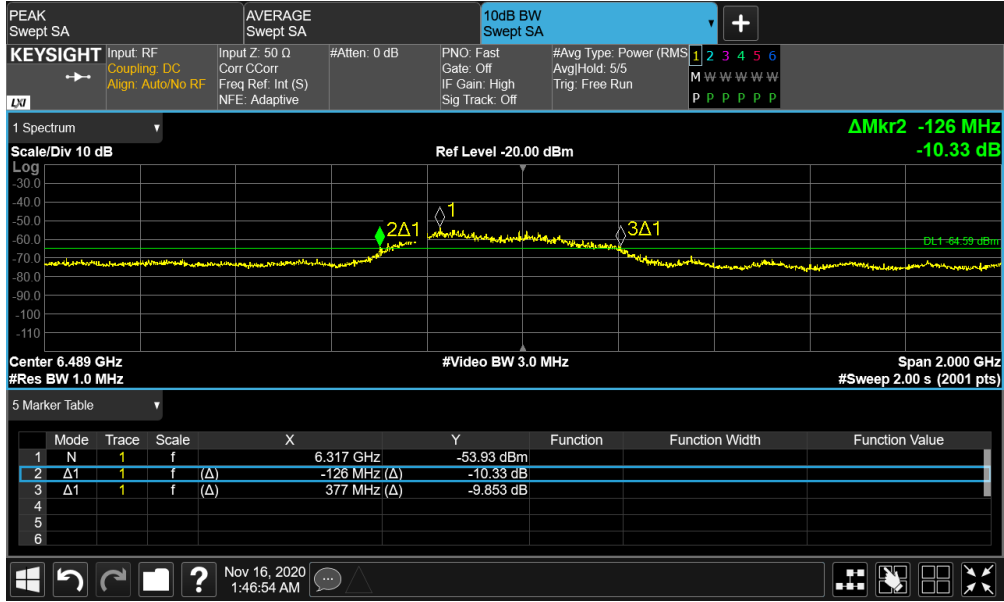

Plot 7-43. BANDWIDTH Plot – ANT1 - CH.5 - SP0 – Preamble 28

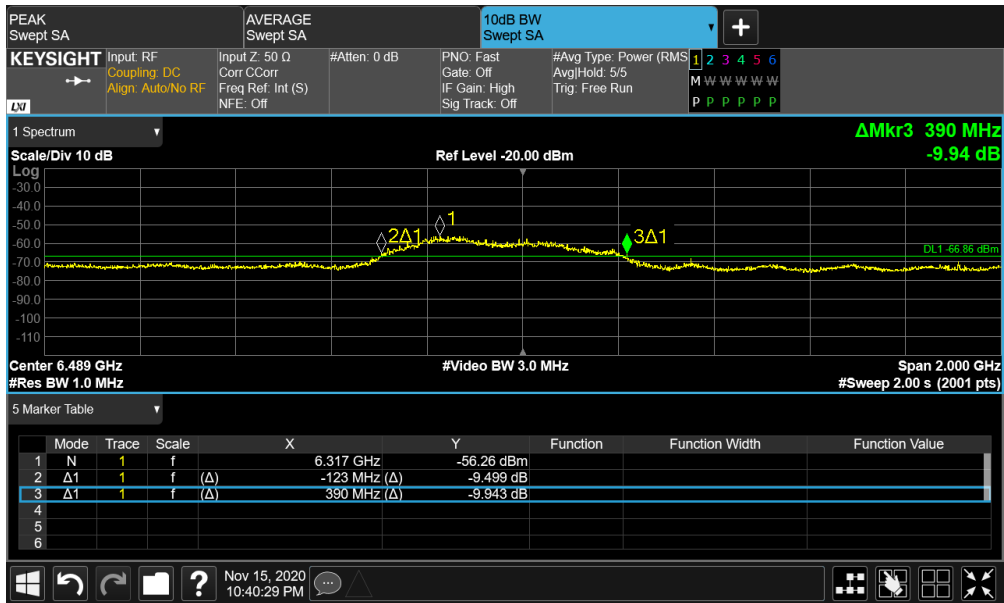


Plot 7-44. BANDWIDTH Plot – ANT1 - CH.5 – SP1 – Preamble 28

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 34 of 120




Plot 7-45. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 28

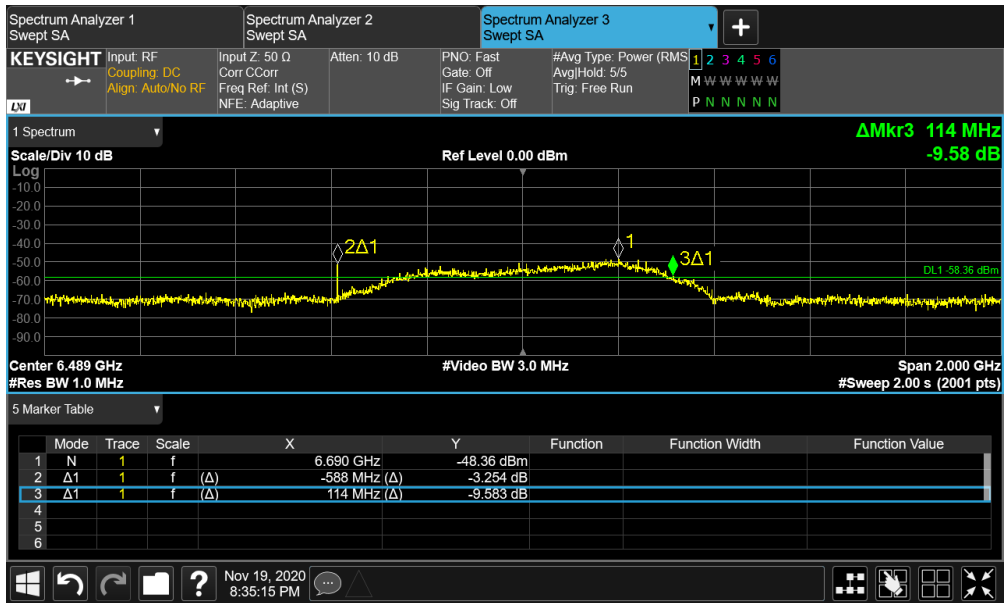


Plot 7-46. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 28

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 35 of 120

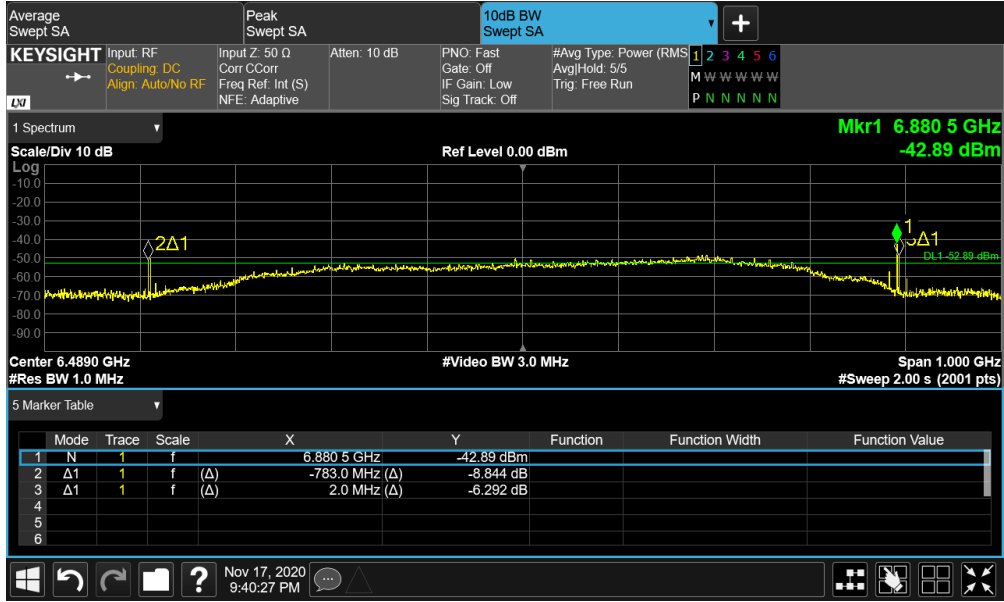


Plot 7-47. BANDWIDTH Plot – ANT2 - CH.5 – SP1 – Preamble 28

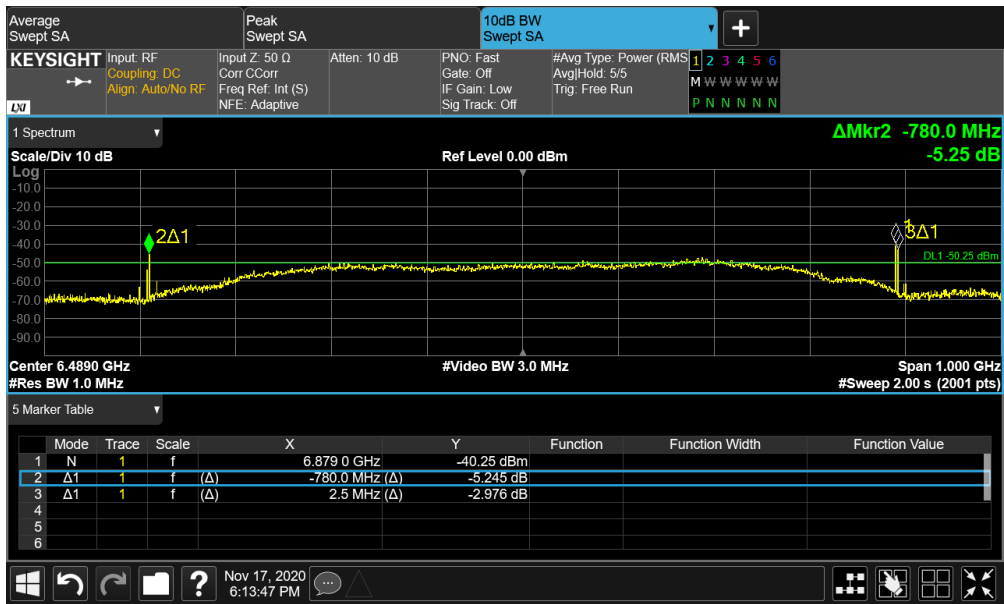


Plot 7-48. BANDWIDTH Plot – ANT2 - CH.5 – SP3 – Preamble 28

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 36 of 120

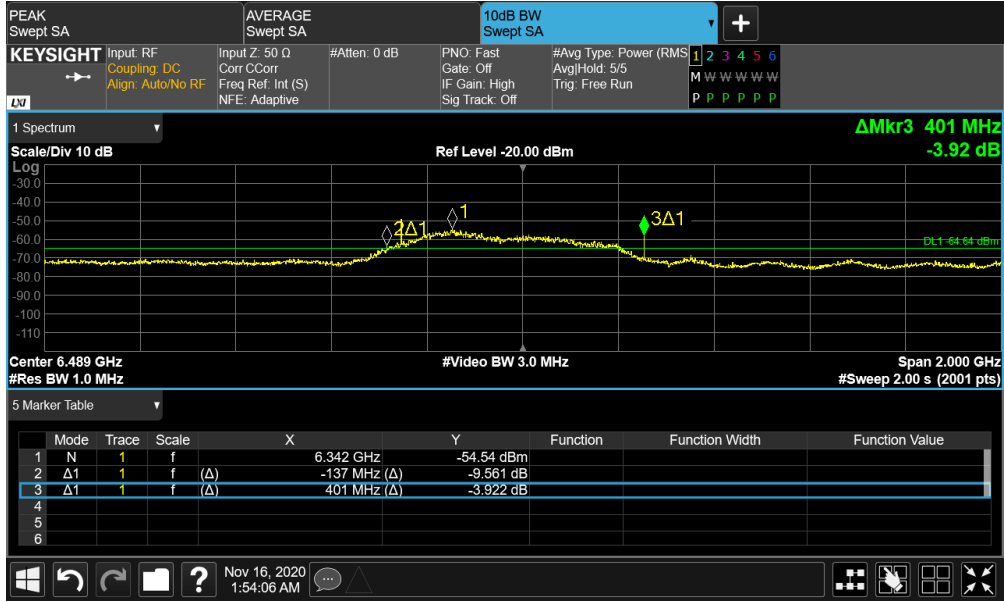


Plot 7-49. BANDWIDTH Plot – ANT1 - CH.5 - SP0 – Preamble 29

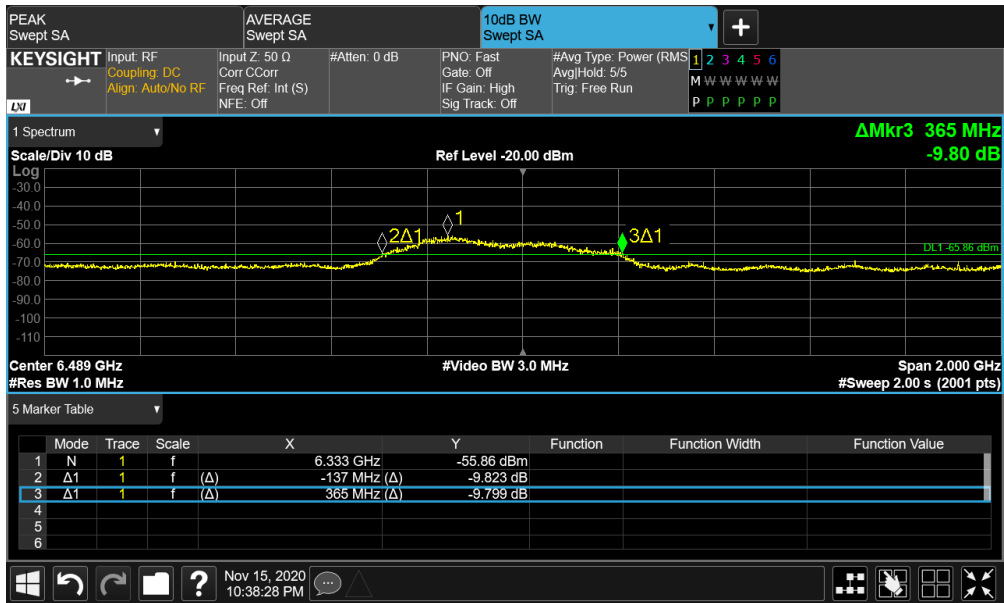


Plot 7-50. BANDWIDTH Plot – ANT1 - CH.5 – SP1 – Preamble 29

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 37 of 120

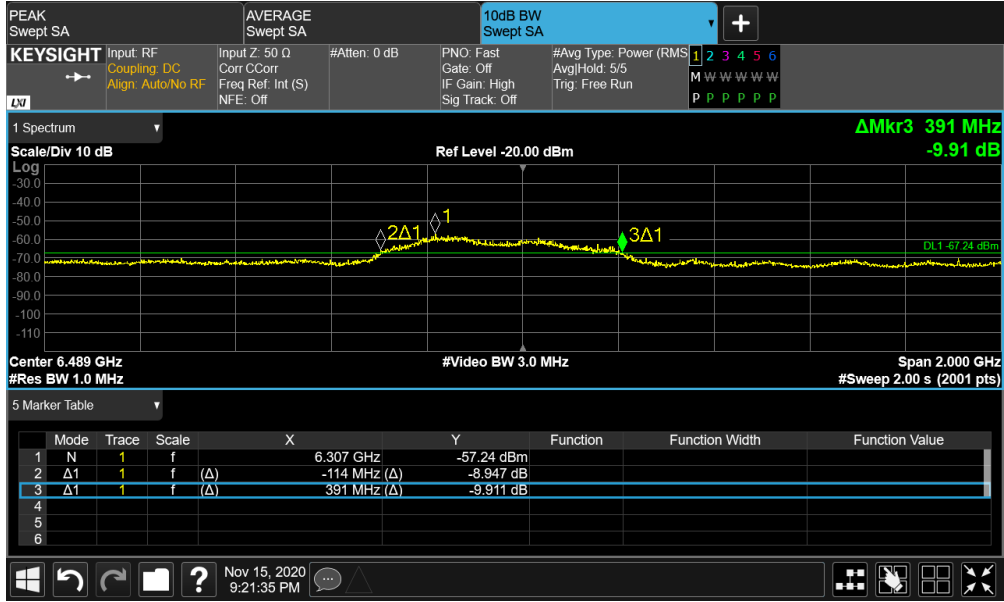


Plot 7-51. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 29

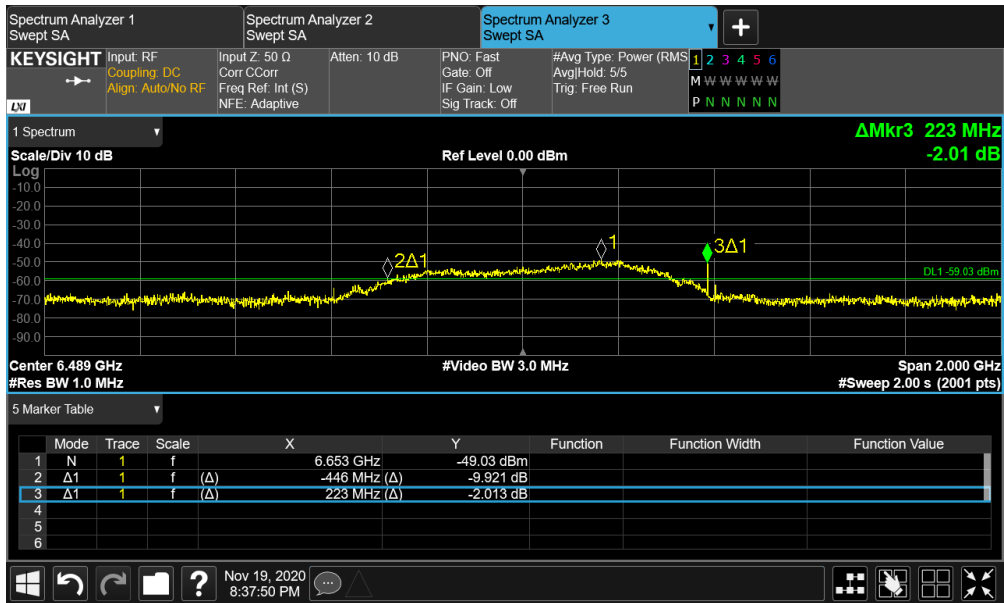


Plot 7-52. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 29

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 38 of 120

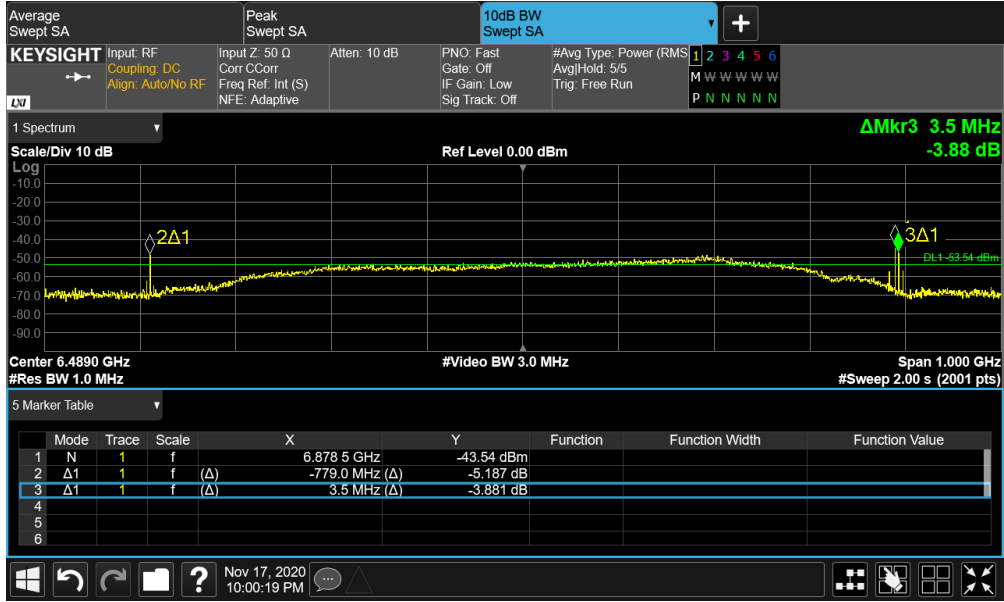


**Plot 7-53. BANDWIDTH Plot – ANT2 - CH.5 – SP1 – Preamble 29**

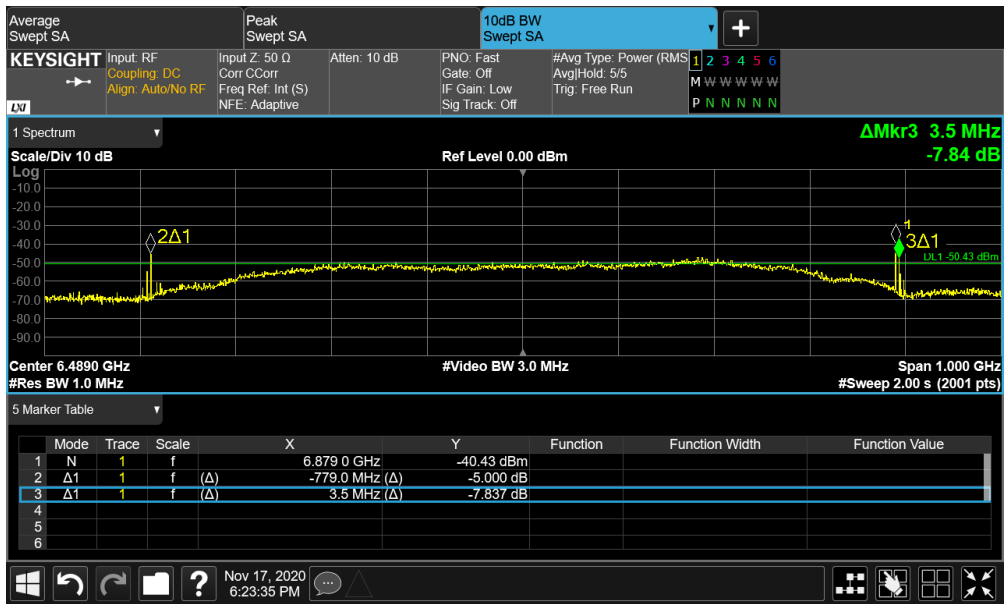


**Plot 7-54. BANDWIDTH Plot – ANT2 - CH.5 – SP3 – Preamble 29**

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 39 of 120

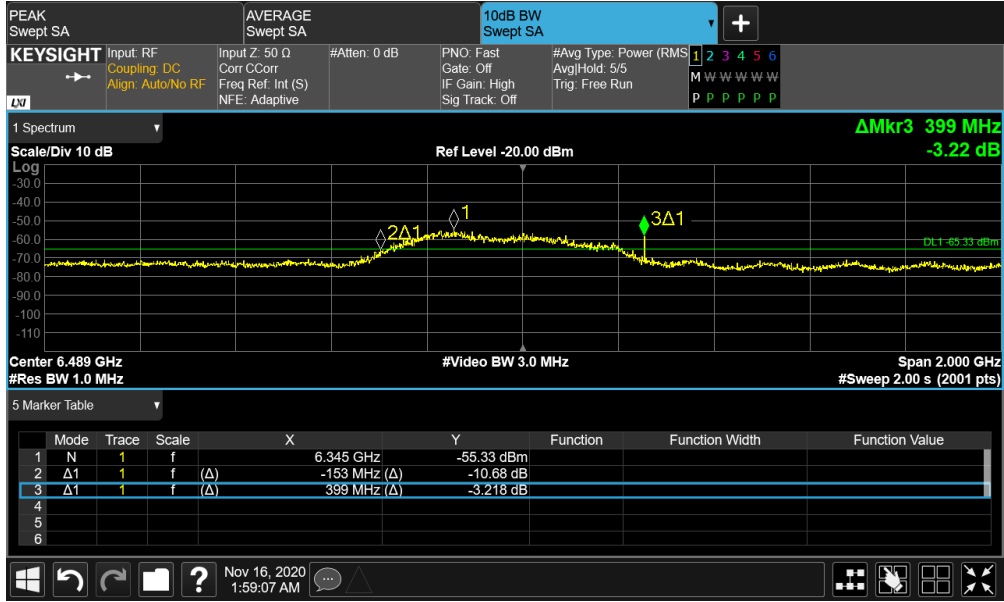


Plot 7-55. BANDWIDTH Plot – ANT1 - CH.5 - SP0 – Preamble 30

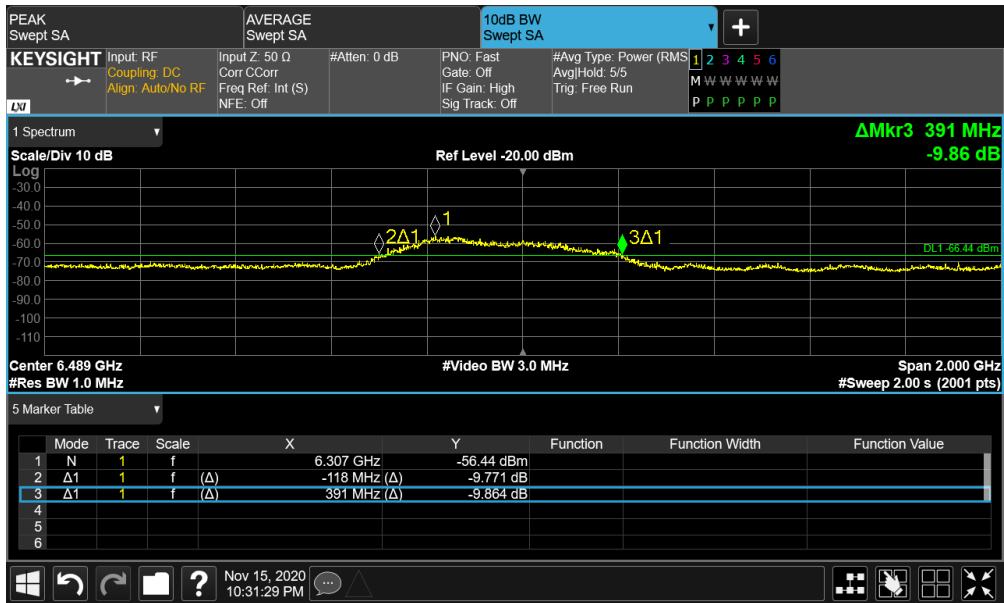


Plot 7-56. BANDWIDTH Plot – ANT1 - CH.5 – SP1 – Preamble 30

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 40 of 120



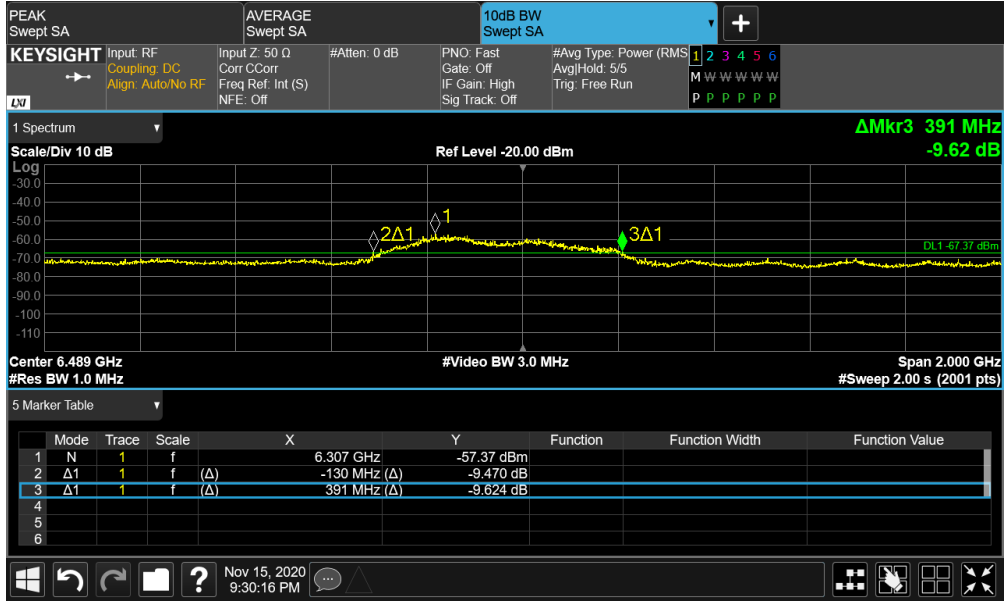


Plot 7-57. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 30

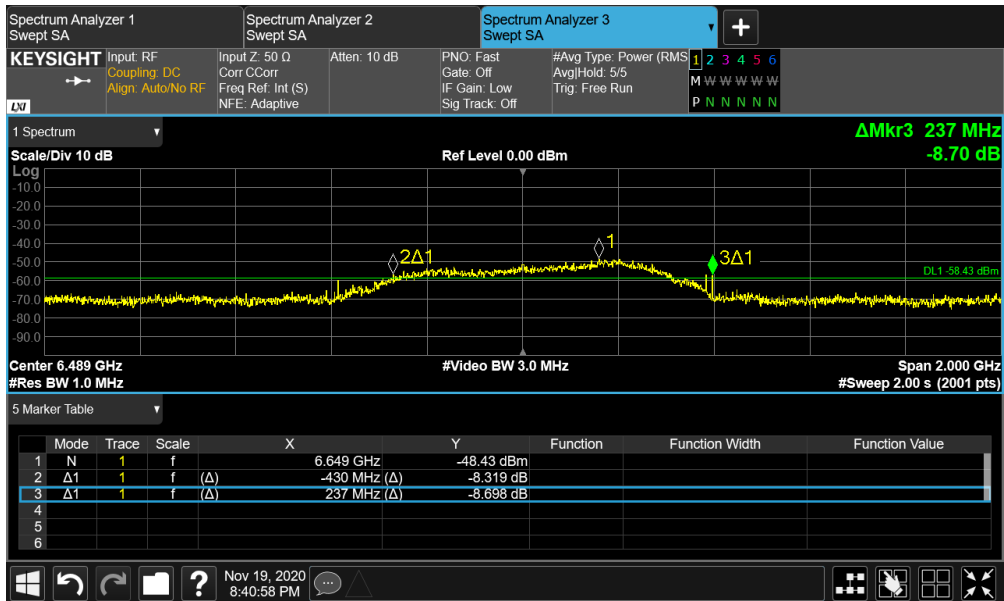


Plot 7-58. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 30

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 41 of 120

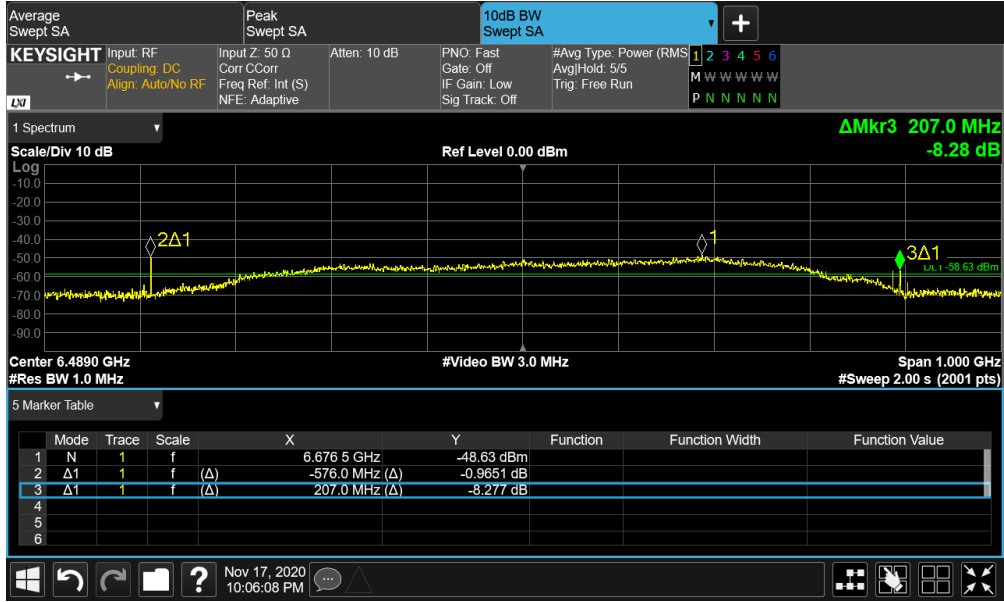

**Plot 7-59. BANDWIDTH Plot – ANT2 - CH.5 – SP1 – Preamble 30**

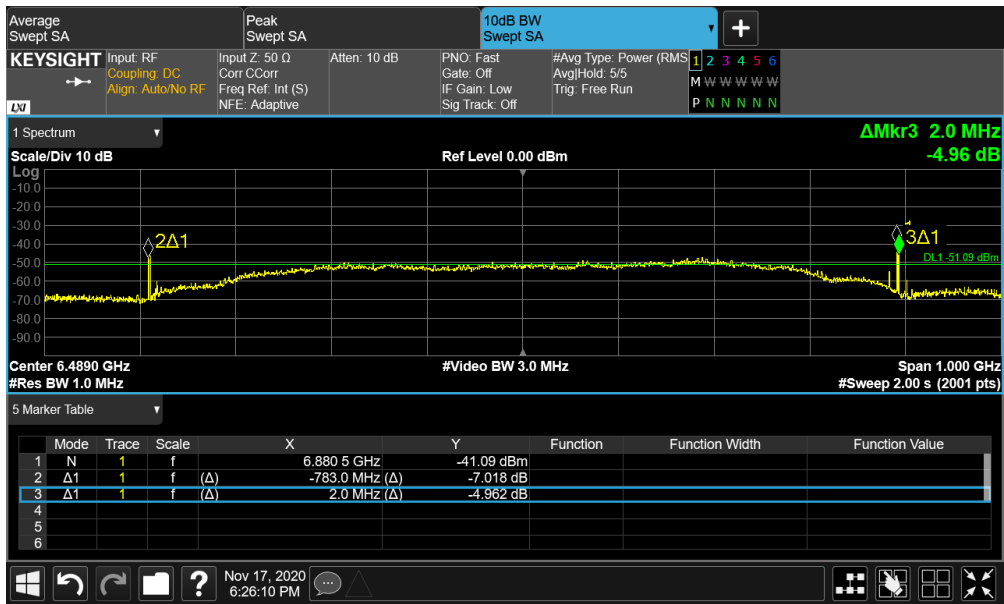


**Plot 7-60. BANDWIDTH Plot – ANT2 - CH.5 – SP3 – Preamble 30**

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 42 of 120




Plot 7-61. BANDWIDTH Plot – ANT1 - CH.5 - SP0 – Preamble 31

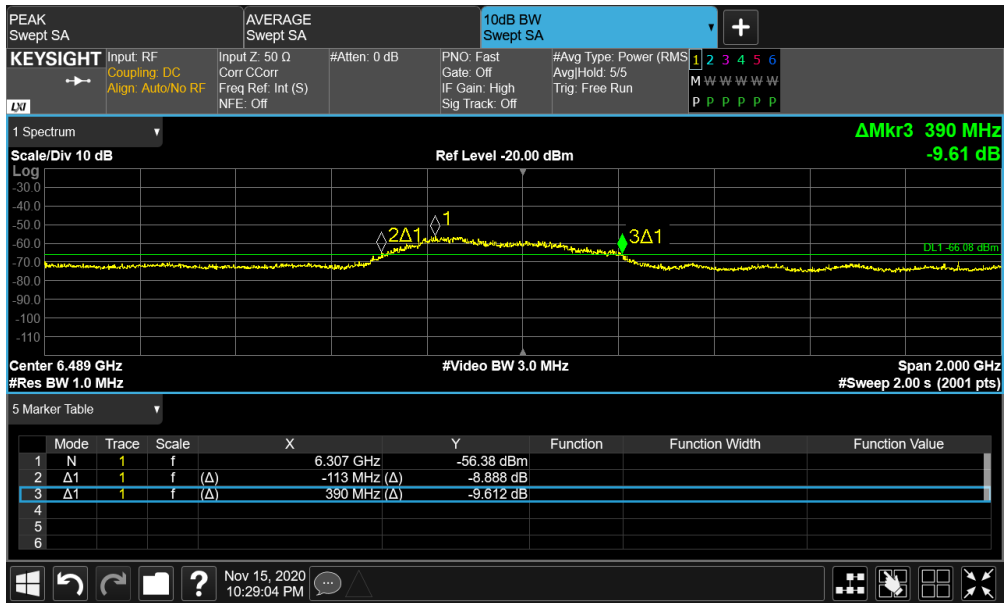


Plot 7-62. BANDWIDTH Plot – ANT1 - CH.5 – SP1 – Preamble 31

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 43 of 120

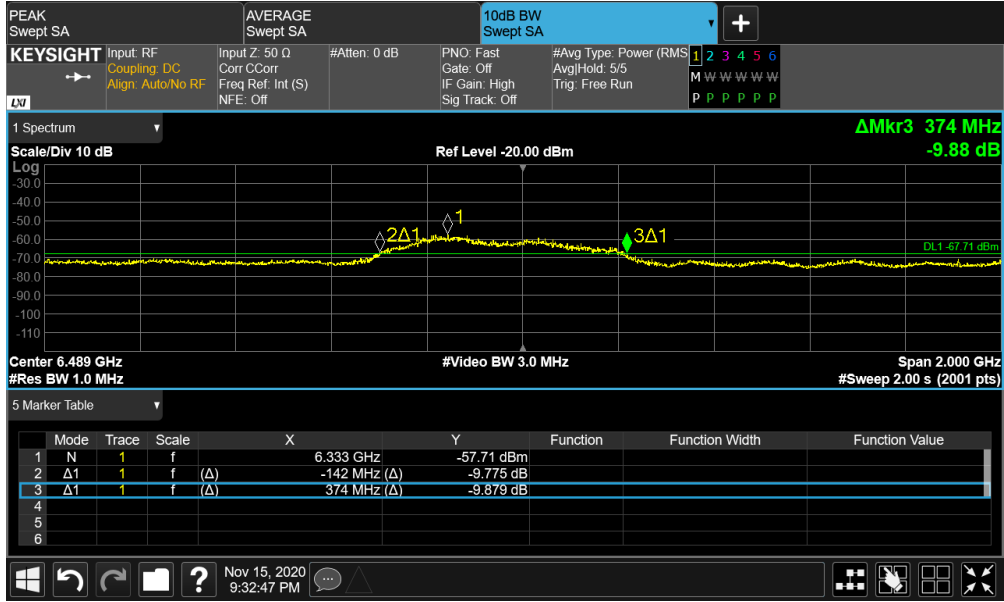


Plot 7-63. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 31

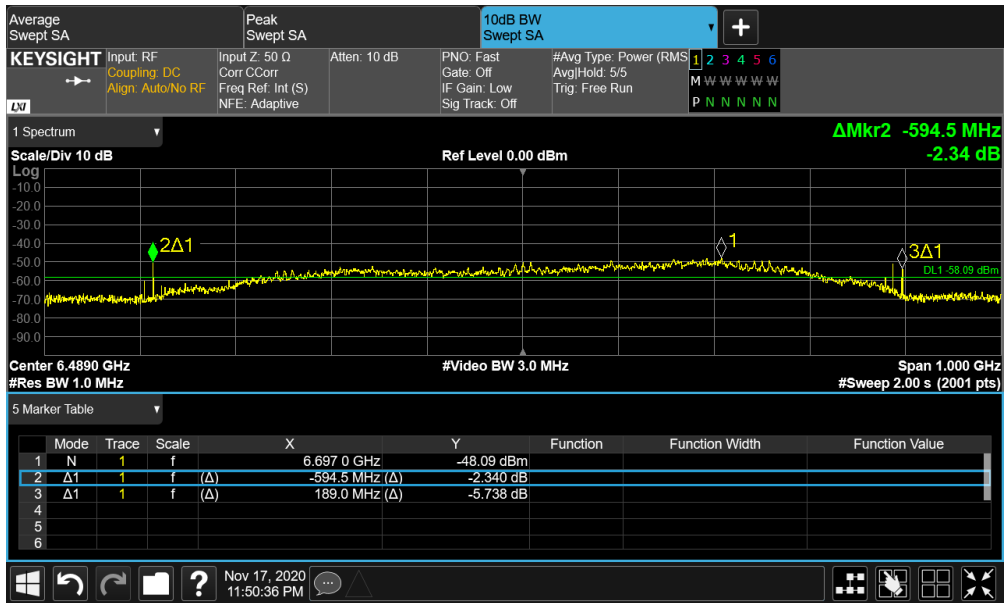


Plot 7-64. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 31

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 44 of 120




Plot 7-65. BANDWIDTH Plot – ANT2 - CH.5 – SP1 – Preamble 31

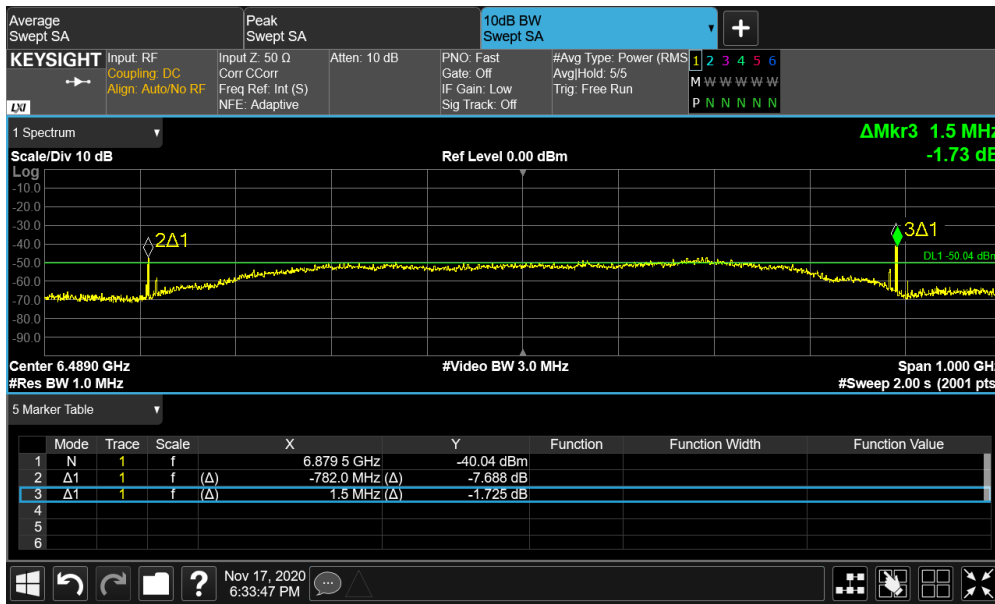


Plot 7-66. BANDWIDTH Plot – ANT2 - CH.5 – SP3 – Preamble 31

FCC ID: A3LSMG998B	<b>PCTEST</b> Proud to be part of <b>element</b>	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 45 of 120

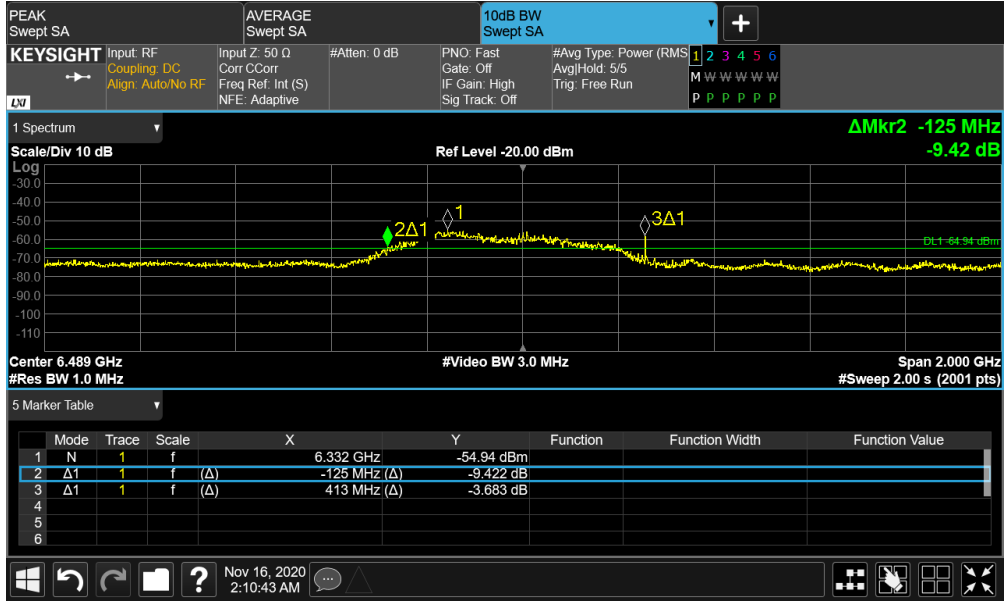


Plot 7-67. BANDWIDTH Plot – ANT1 - CH.5 - SP0 – Preamble 32

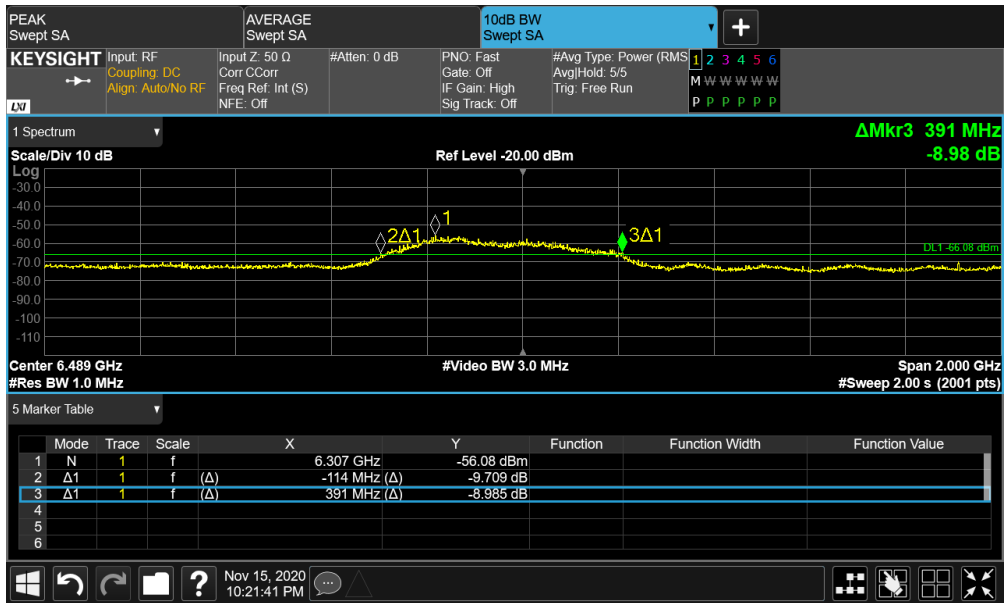


Plot 7-68. BANDWIDTH Plot – ANT1 - CH.5 – SP1 – Preamble 32

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 46 of 120

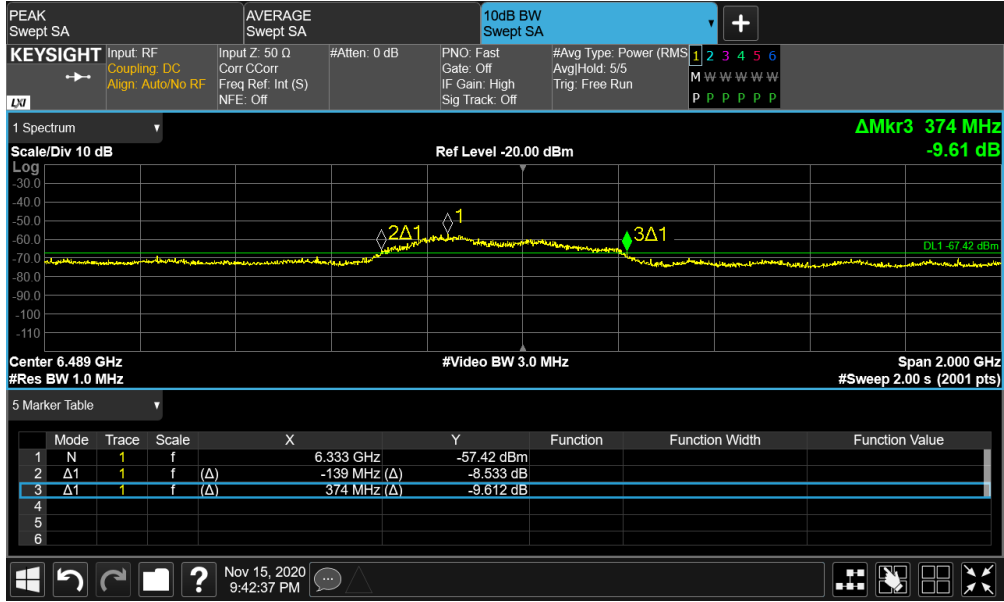


Plot 7-69. BANDWIDTH Plot – ANT1 - CH.5 – SP3 – Preamble 32

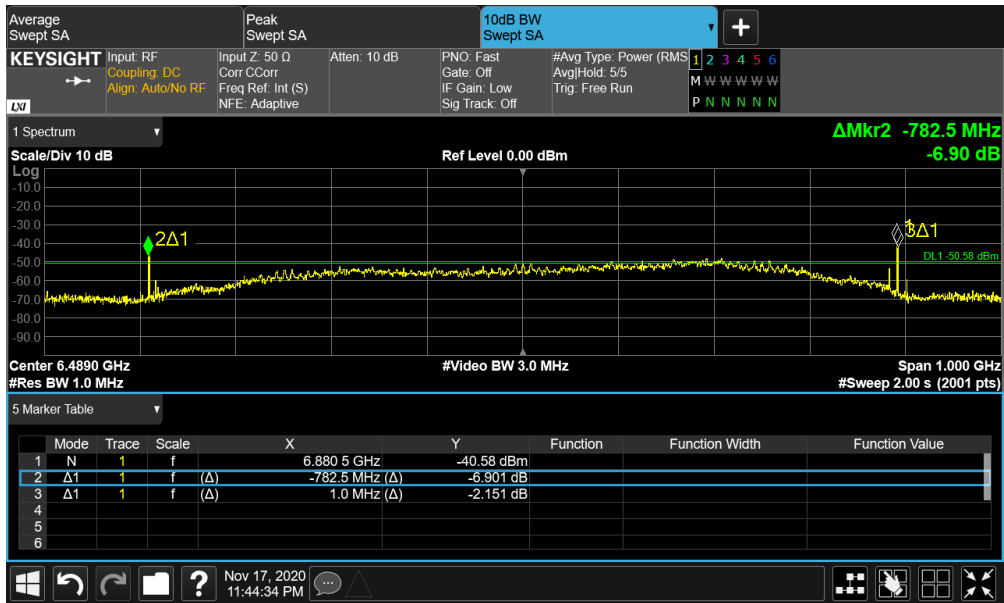


Plot 7-70. BANDWIDTH Plot – ANT2 - CH.5 - SP0 – Preamble 32

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 47 of 120

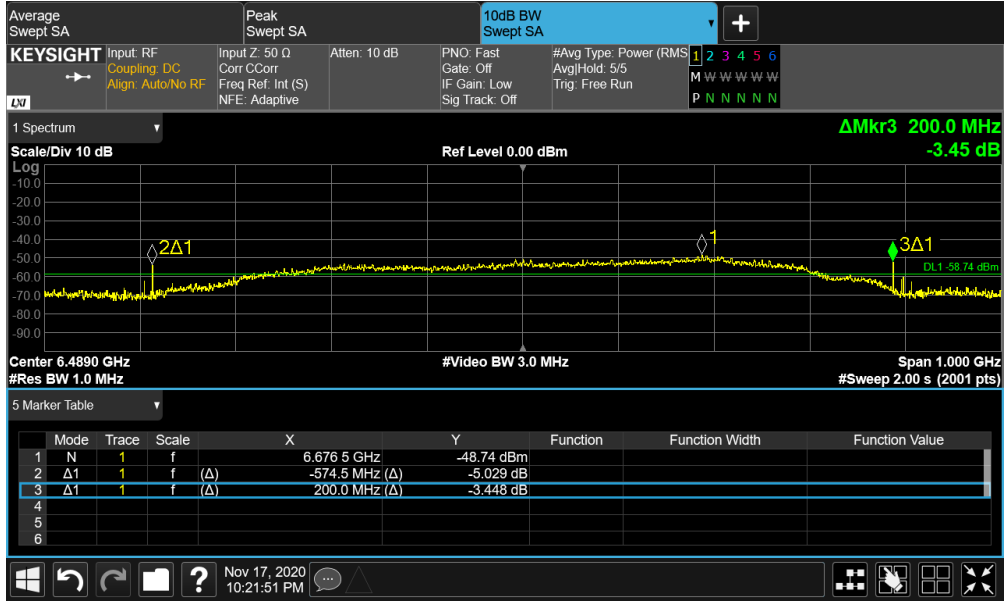

Plot 7-71. BANDWIDTH Plot – ANT2 - CH.5 – SP1 – Preamble 32

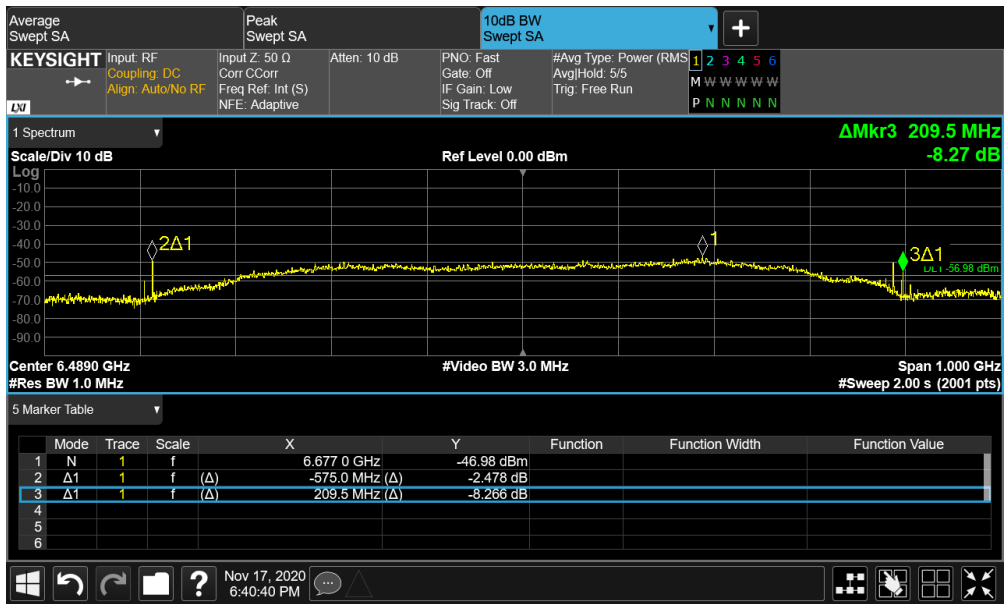

Plot 7-72. BANDWIDTH Plot – ANT2 - CH.5 – SP3 – Preamble 32

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 48 of 120





ANT	CH	Preamble Id	CONFIG	Mode	FL [GHz]	FH [GHz]	fM [GHz]	BW [MHz]	Min BW [MHz]	Pass/Fail
1	9	9	SP0	BPRF	7.598	8.380	7.989	782.00	500	P
1	9	9	SP1	BPRF	7.598	8.380	7.989	782.00	500	P
1	9	9	SP3	BPRF	7.599	8.377	7.988	778.00	500	P
2	9	9	SP0	BPRF	7.694	8.379	8.037	685.00	500	P
2	9	9	SP1	BPRF	7.594	8.381	7.988	787.00	500	P
2	9	9	SP3	BPRF	7.594	8.381	7.988	787.00	500	P
1	9	10	SP0	BPRF	7.829	8.380	8.105	551.00	500	P
1	9	10	SP1	BPRF	7.827	8.380	8.104	553.00	500	P
1	9	10	SP3	BPRF	7.596	8.380	7.988	784.00	500	P
2	9	10	SP0	BPRF	7.601	8.379	7.990	778.00	500	P
2	9	10	SP1	BPRF	7.594	8.374	7.984	780.00	500	P
2	9	10	SP3	BPRF	7.592	8.287	7.940	695.00	500	P
1	9	11	SP0	BPRF	7.596	8.381	7.989	785.00	500	P
1	9	11	SP1	BPRF	7.598	8.380	7.989	782.00	500	P
1	9	11	SP3	BPRF	7.598	8.380	7.989	782.00	500	P
2	9	11	SP0	BPRF	7.595	8.378	7.987	783.00	500	P
2	9	11	SP1	BPRF	7.600	8.381	7.991	781.00	500	P
2	9	11	SP3	BPRF	7.594	8.381	7.988	787.00	500	P
1	9	12	SP0	BPRF	7.596	8.379	7.988	783.00	500	P
1	9	12	SP1	BPRF	7.834	8.377	8.106	543.00	500	P
1	9	12	SP3	BPRF	7.842	8.379	8.111	537.00	500	P
2	9	12	SP0	BPRF	7.594	8.380	7.987	786.00	500	P
2	9	12	SP1	BPRF	7.595	8.374	7.985	779.00	500	P
2	9	12	SP3	BPRF	7.594	8.379	7.987	785.00	500	P
1	9	25	SP0	BPRF	7.596	8.379	7.988	783.00	500	P
1	9	25	SP1	BPRF	7.834	8.377	8.106	543.00	500	P
1	9	25	SP3	BPRF	7.842	8.379	8.111	537.00	500	P
2	9	25	SP0	BPRF	7.594	8.380	7.987	786.00	500	P
2	9	25	SP1	BPRF	7.595	8.374	7.985	779.00	500	P
2	9	25	SP3	BPRF	7.594	8.379	7.987	785.00	500	P
1	9	26	SP0	BPRF	7.598	8.380	7.989	782.00	500	P
1	9	26	SP1	BPRF	7.596	8.379	7.988	783.00	500	P
1	9	26	SP3	BPRF	7.830	8.380	8.105	550.00	500	P
2	9	26	SP0	BPRF	7.593	8.379	7.986	786.00	500	P
2	9	26	SP1	BPRF	7.594	8.381	7.988	787.00	500	P
2	9	26	SP3	BPRF	7.593	8.381	7.987	788.00	500	P
1	9	27	SP0	BPRF	7.597	8.379	7.988	782.00	500	P
1	9	27	SP1	BPRF	7.830	8.376	8.103	546.00	500	P
1	9	27	SP3	BPRF	7.831	8.377	8.104	546.00	500	P
2	9	27	SP0	BPRF	7.692	8.380	8.036	688.00	500	P
2	9	27	SP1	BPRF	7.595	8.280	7.938	685.00	500	P
2	9	27	SP3	BPRF	7.600	8.379	7.990	779.00	500	P
1	9	28	SP0	BPRF	7.597	8.379	7.988	782.00	500	P
1	9	28	SP1	BPRF	7.597	8.379	7.988	782.00	500	P
1	9	28	SP3	BPRF	7.597	8.379	7.988	782.00	500	P
2	9	28	SP0	BPRF	7.601	8.374	7.988	773.00	500	P
2	9	28	SP1	BPRF	7.596	8.377	7.987	781.00	500	P
2	9	28	SP3	BPRF	7.597	8.379	7.988	782.00	500	P
1	9	29	SP0	BPRF	7.597	8.379	7.988	782.00	500	P
1	9	29	SP1	BPRF	7.597	8.379	7.988	782.00	500	P
1	9	29	SP3	BPRF	7.598	8.380	7.989	782.00	500	P
2	9	29	SP0	BPRF	7.594	8.380	7.987	786.00	500	P
2	9	29	SP1	BPRF	7.600	8.298	7.949	698.00	500	P
2	9	29	SP3	BPRF	7.675	8.380	8.028	705.00	500	P
1	9	30	SP0	BPRF	7.597	8.379	7.988	782.00	500	P
1	9	30	SP1	BPRF	7.827	8.376	8.102	549.00	500	P
1	9	30	SP3	BPRF	7.598	8.379	7.989	781.00	500	P
2	9	30	SP0	BPRF	7.678	8.267	7.973	589.00	500	P
2	9	30	SP1	BPRF	7.680	8.384	8.032	704.00	500	P
2	9	30	SP3	BPRF	7.594	8.374	7.984	780.00	500	P
1	9	31	SP0	BPRF	7.598	8.380	7.989	782.00	500	P
1	9	31	SP1	BPRF	7.598	8.380	7.989	782.00	500	P
1	9	31	SP3	BPRF	7.598	8.380	7.989	782.00	500	P
2	9	31	SP0	BPRF	7.593	8.373	7.983	780.00	500	P
2	9	31	SP1	BPRF	7.593	8.381	7.987	788.00	500	P
2	9	31	SP3	BPRF	7.593	8.381	7.987	788.00	500	P
1	9	32	SP0	BPRF	7.596	8.378	7.987	782.00	500	P
1	9	32	SP1	BPRF	7.830	8.376	8.103	546.00	500	P
1	9	32	SP3	BPRF	7.597	8.379	7.988	782.00	500	P
2	9	32	SP0	BPRF	7.594	8.380	7.987	786.00	500	P
2	9	32	SP1	BPRF	7.594	8.381	7.988	787.00	500	P
2	9	32	SP3	BPRF	7.605	8.380	7.993	775.00	500	P

Table 7-3. UWB 10dB Bandwidth Summary [Channel 9]

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 49 of 120

### Bandwidth Results

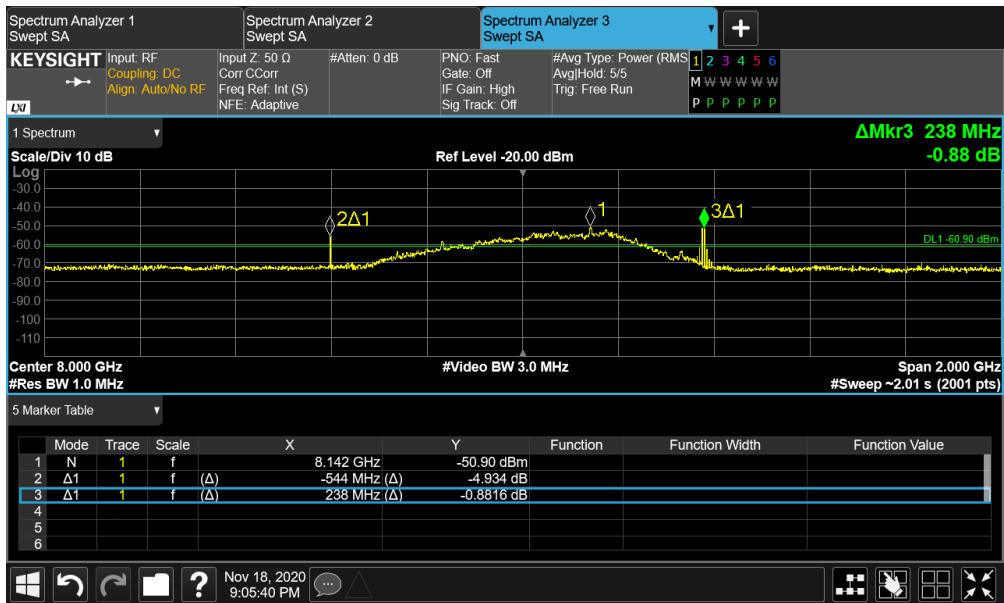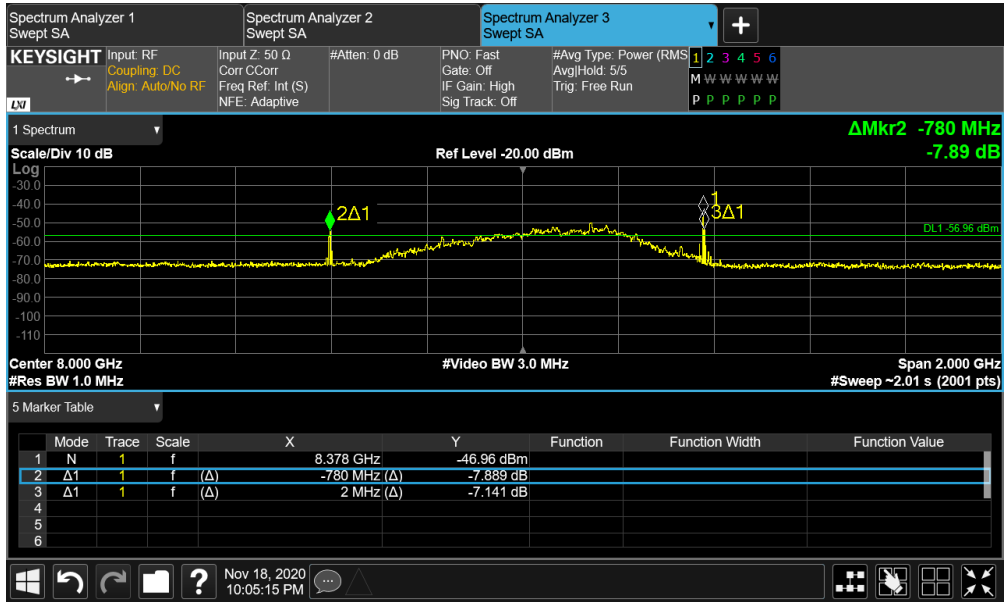

FCC ID: A3LSMG998B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2009280154-28.A3L	Test Dates: 9/28/2020-12/04/2020	EUT Type: Portable Handset		Page 50 of 120