



Plot 7-339. In-Band Emissions Plot MIMO ANT2 (80MHz BW 802.11ax (26 Tones) (UNII Band 5) – Ch. 87)

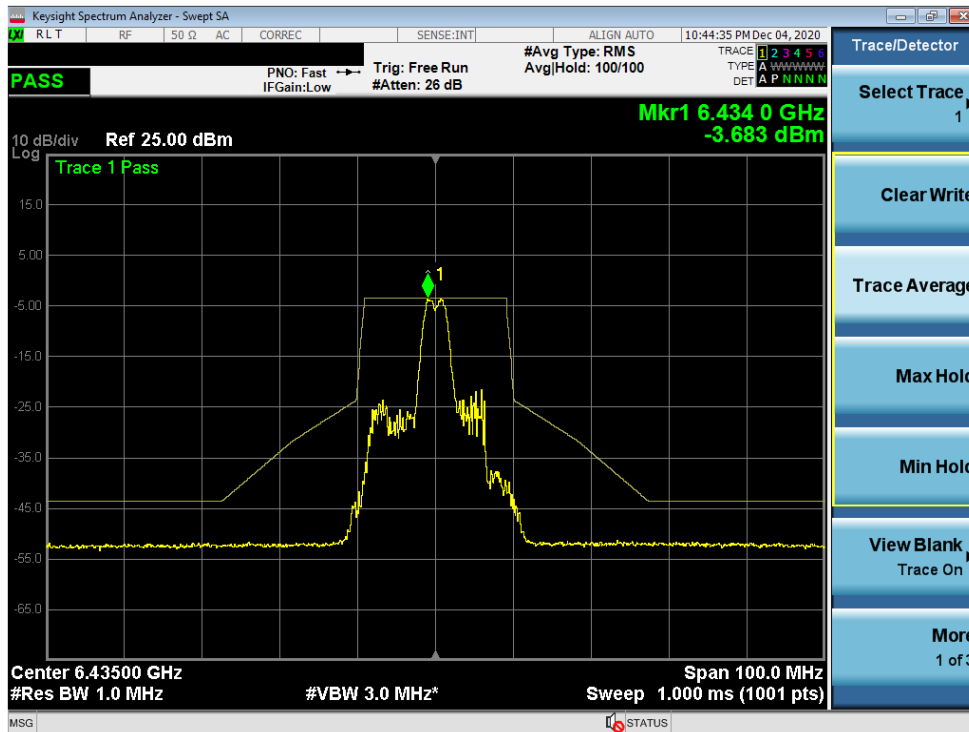


Plot 7-340. In-Band Emissions Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 97)

| | | | | |
|--|-------------------------------------|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 210 of 276 |

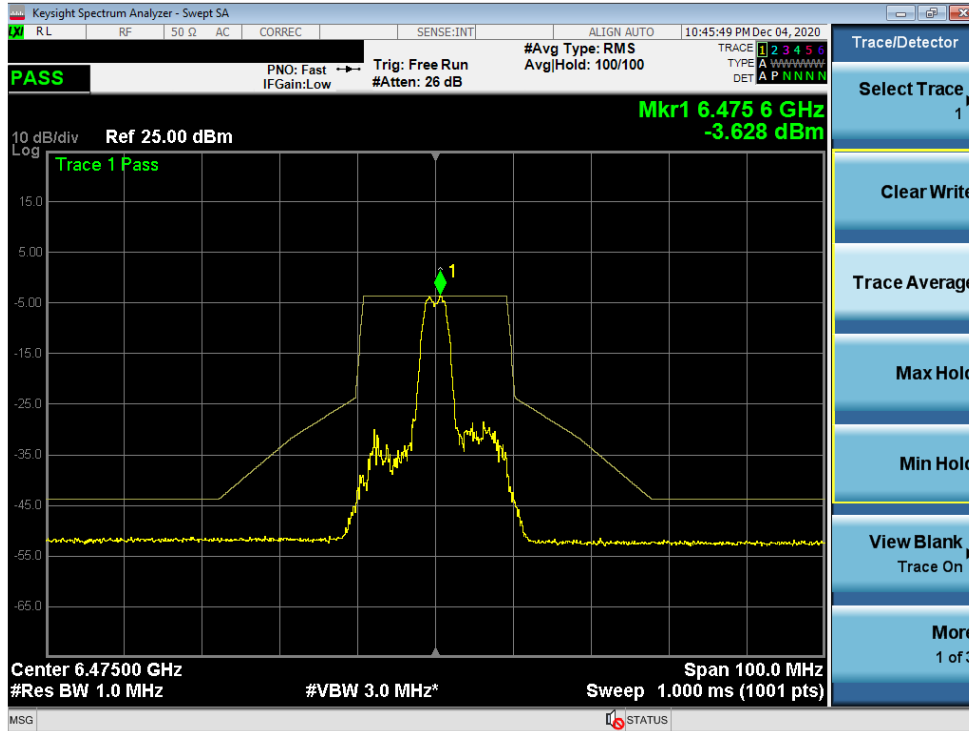


Plot 7-341. In-Band Emissions Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 105)

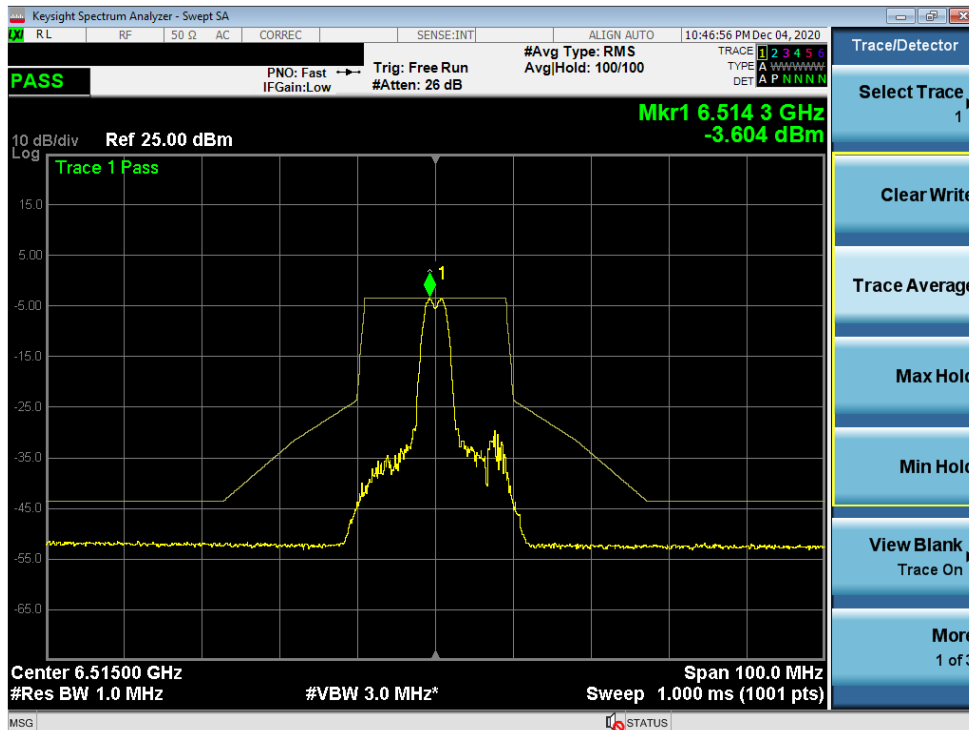


Plot 7-342. In-Band Emissions Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 113)

| | | | | |
|--|--|---|--|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 211 of 276 |

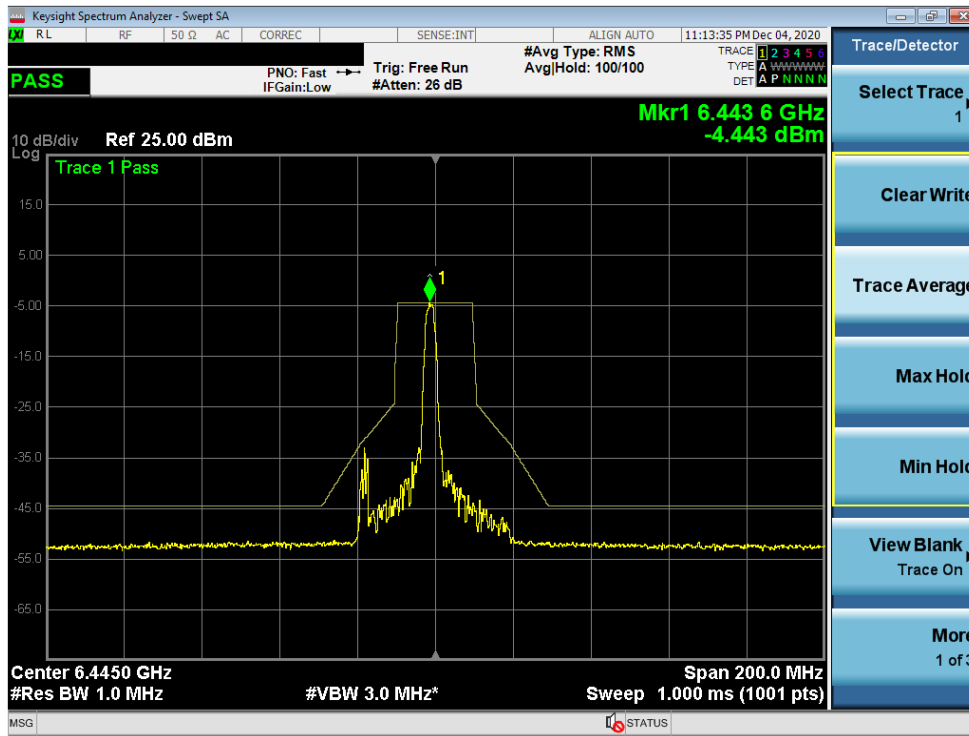


Plot 7-343. In-Band Emissions Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 99)

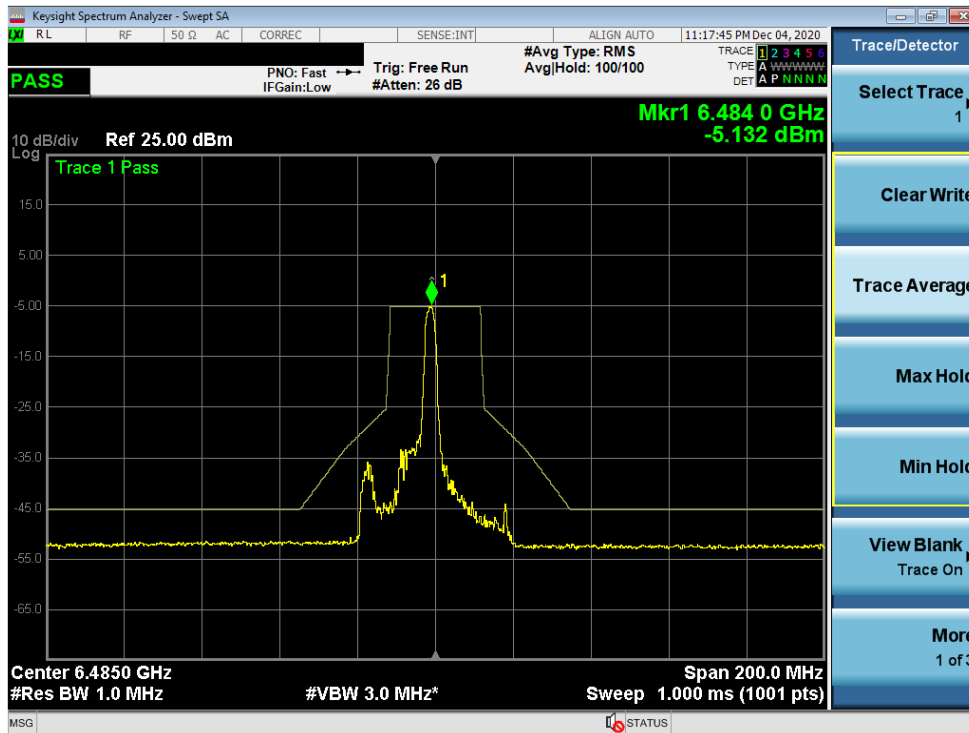


Plot 7-344. In-Band Emissions Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 107)

| | | | | |
|--|--|---------------------------------------|----------------|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 212 of 276 |

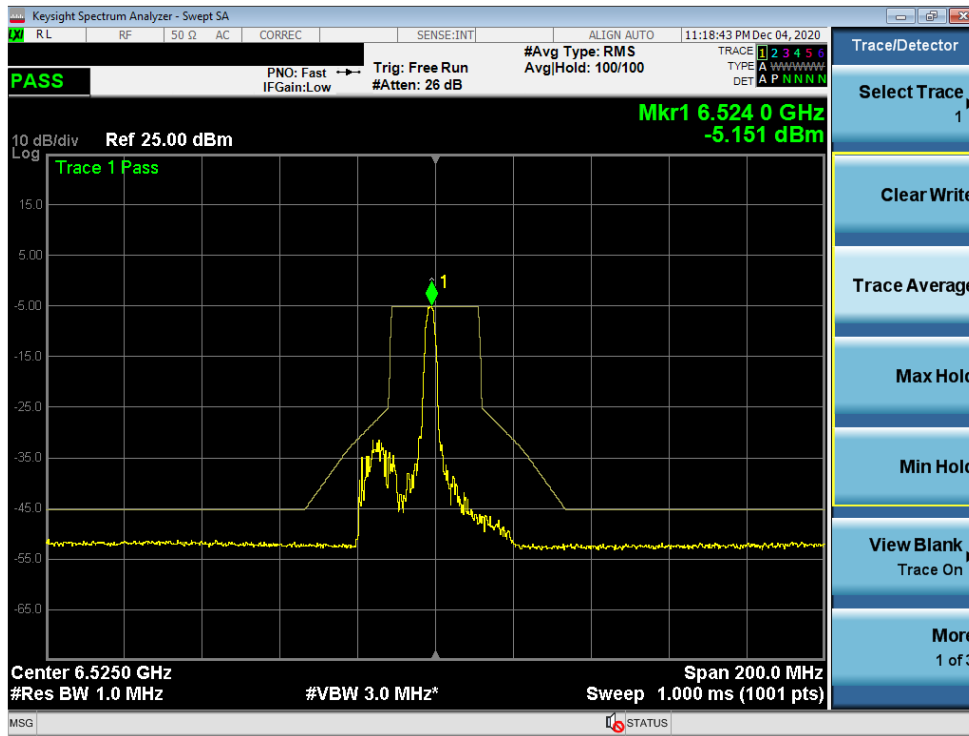


Plot 7-345. In-Band Emissions Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 115)

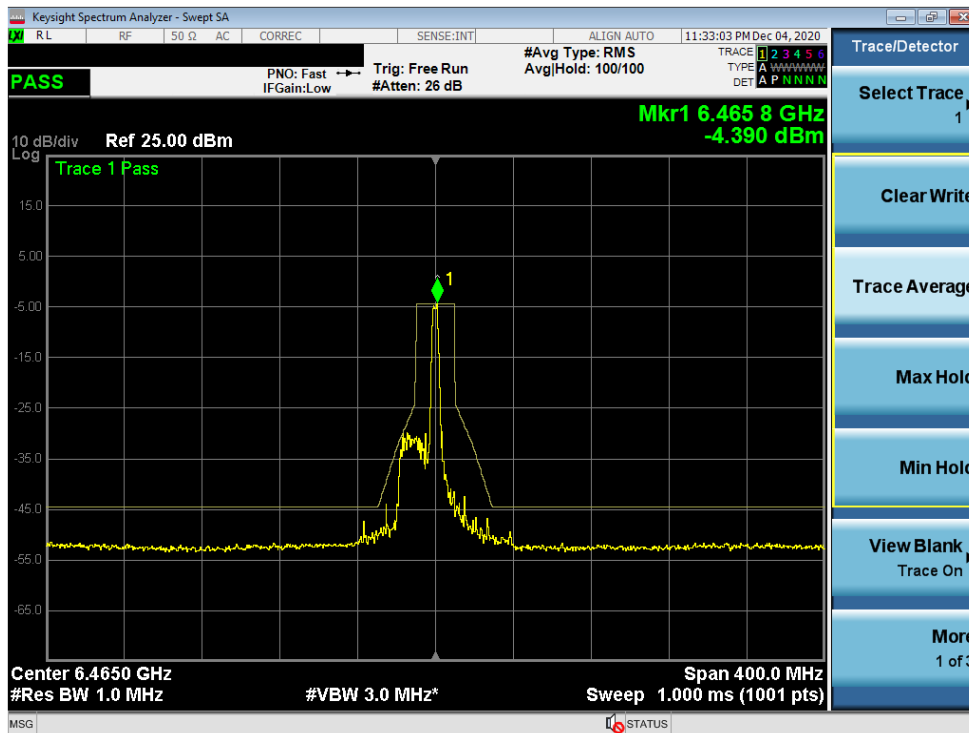


Plot 7-346. In-Band Emissions Plot MIMO ANT2 (80MHz BW 802.11ax (26 Tones) (UNII Band 6) – Ch. 103)

| | | | | |
|--|--|---------------------------------------|----------------|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 213 of 276 |

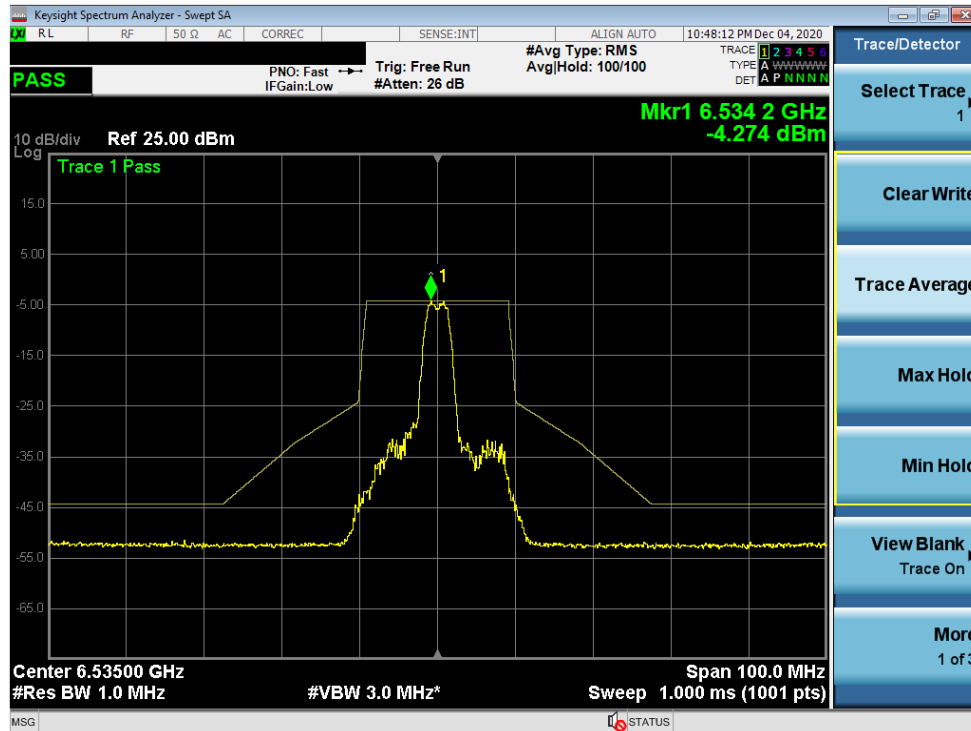


Plot 7-347. In-Band Emissions Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 117)

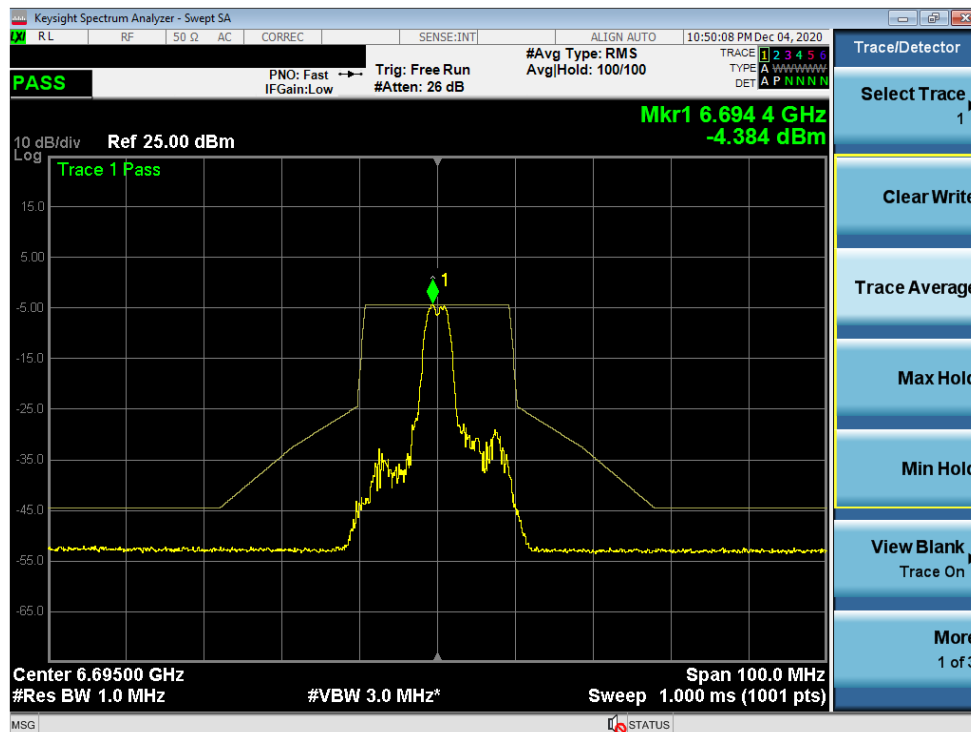


Plot 7-348. In-Band Emissions Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 149)

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 214 of 276 |

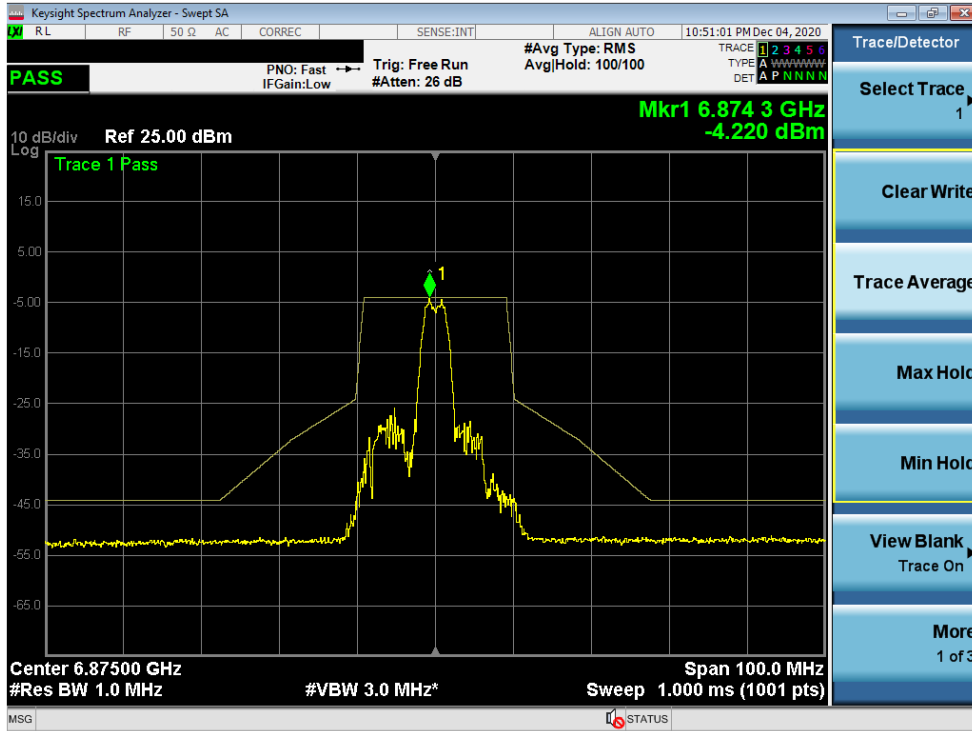


Plot 7-349. In-Band Emissions Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 185)

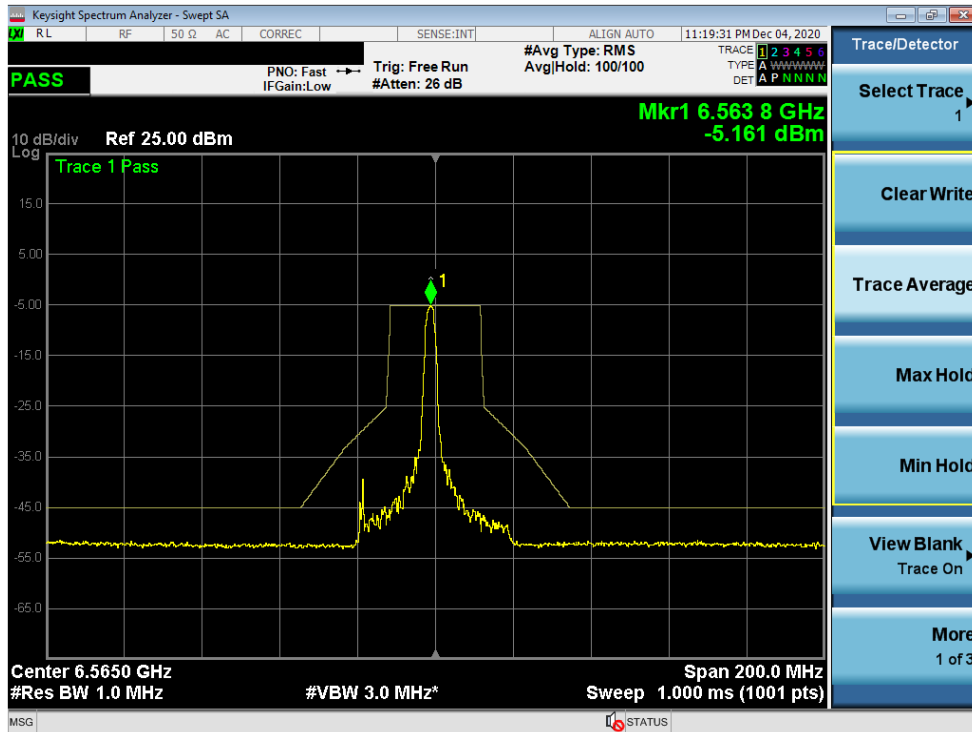


Plot 7-350. In-Band Emissions Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 123)

| | | | | |
|--|--|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 215 of 276 |

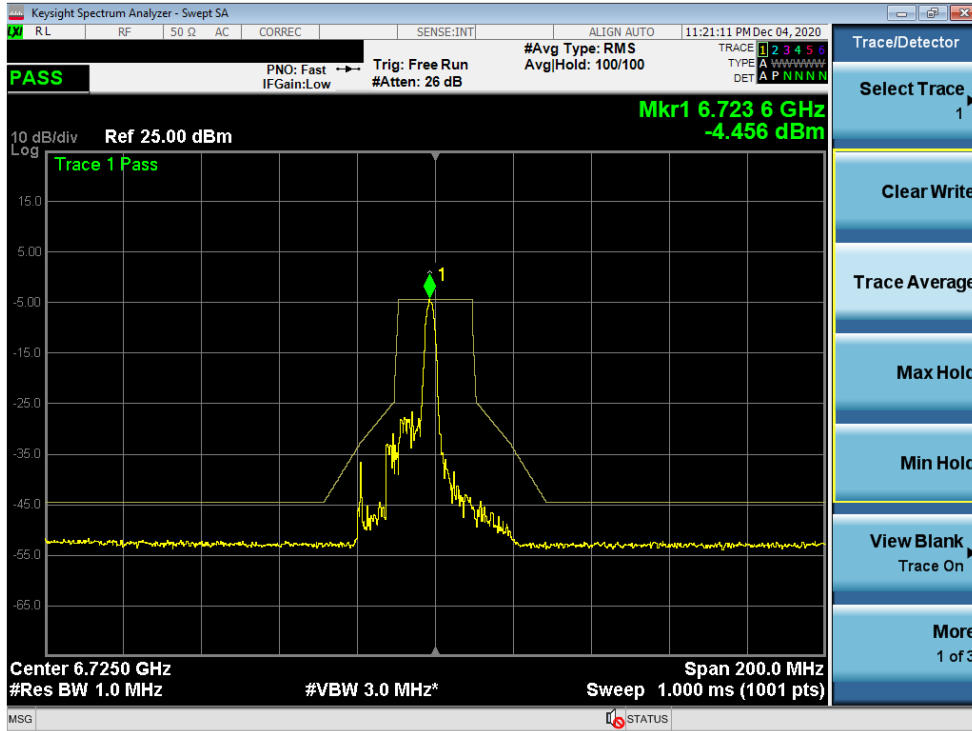


Plot 7-351. In-Band Emissions Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 155)

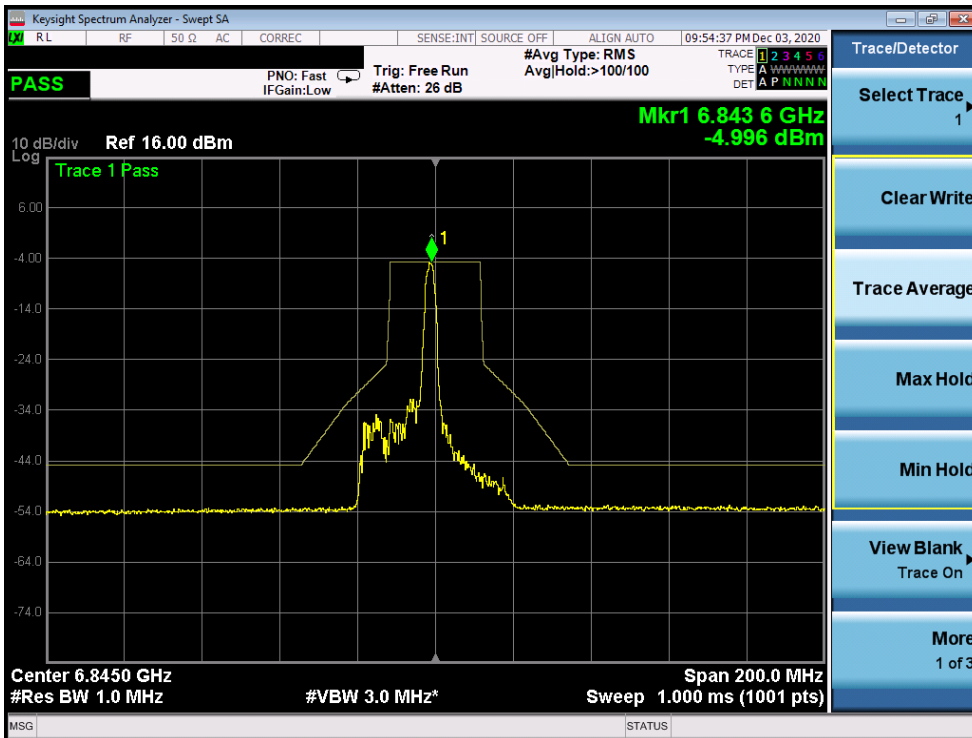


Plot 7-352. In-Band Emissions Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 179)

| | | | | |
|--|---------------------------------------|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 216 of 276 |

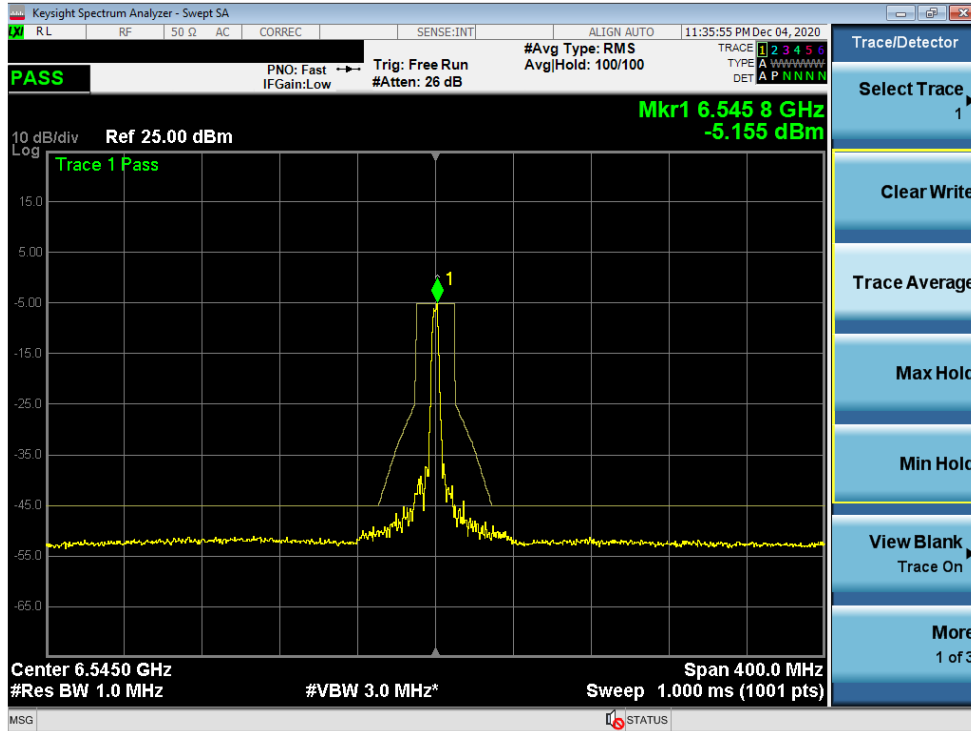


Plot 7-353. In-Band Emissions Plot MIMO ANT2 (80MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 119)

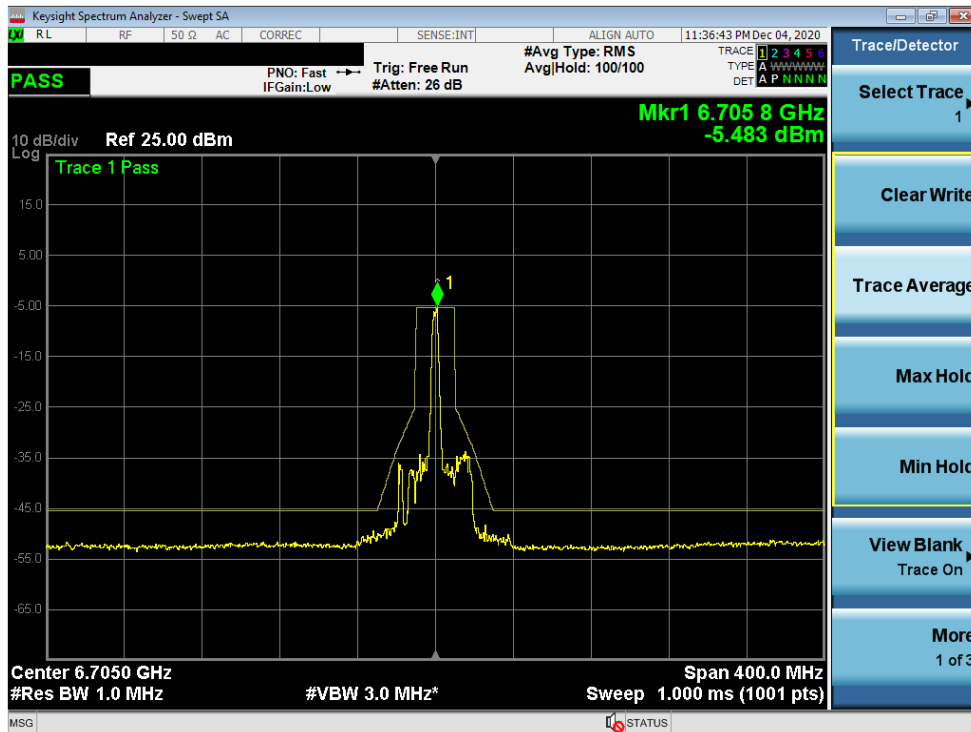


Plot 7-354. In-Band Emissions Plot MIMO ANT2 (80MHz BW 802.11ax (26 Tones) (UNII Band 7) – Ch. 151)

| | | | | |
|--|--|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 217 of 276 |

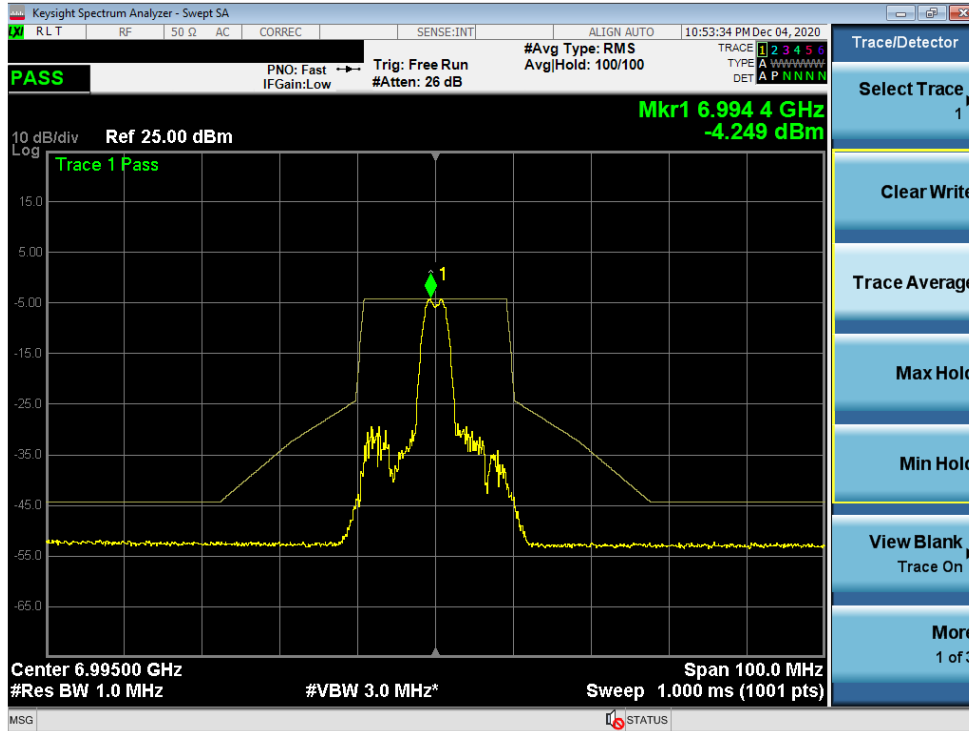


Plot 7-357. In-Band Emissions Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 209)

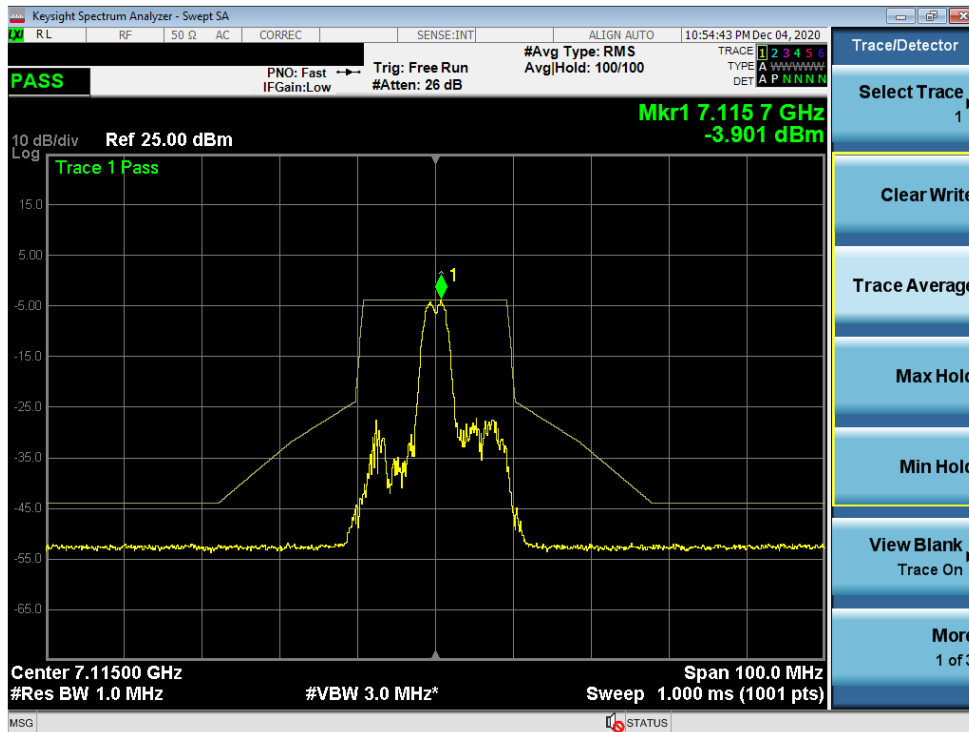


Plot 7-358. In-Band Emissions Plot MIMO ANT2 (20MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 233)

| | | | | |
|--|-------------------------------------|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 219 of 276 |

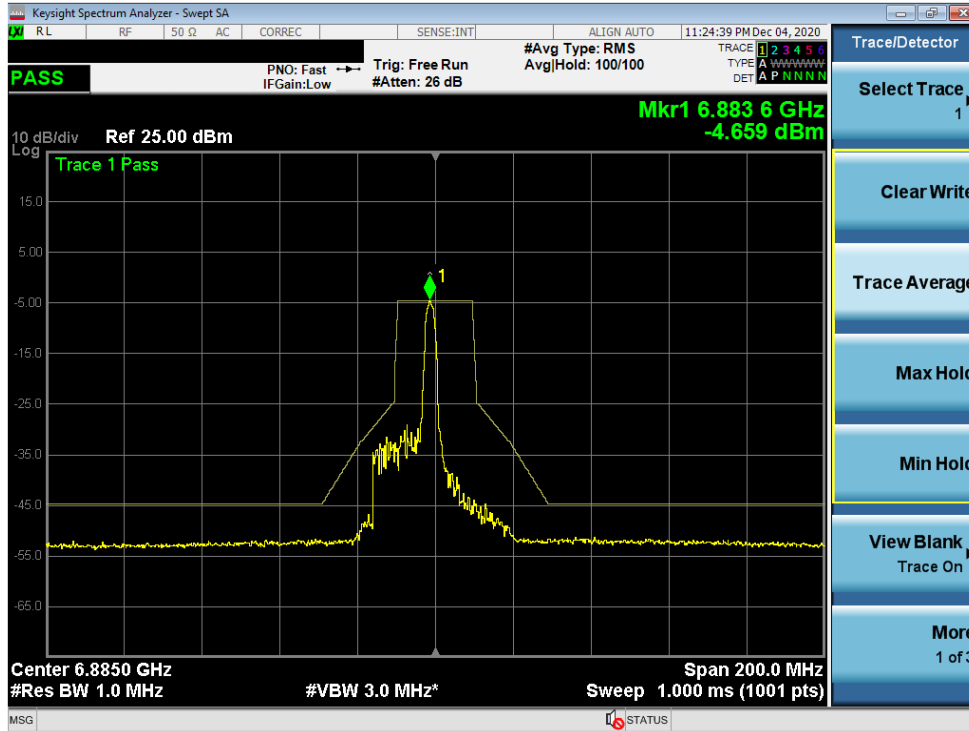


Plot 7-359. In-Band Emissions Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 187)

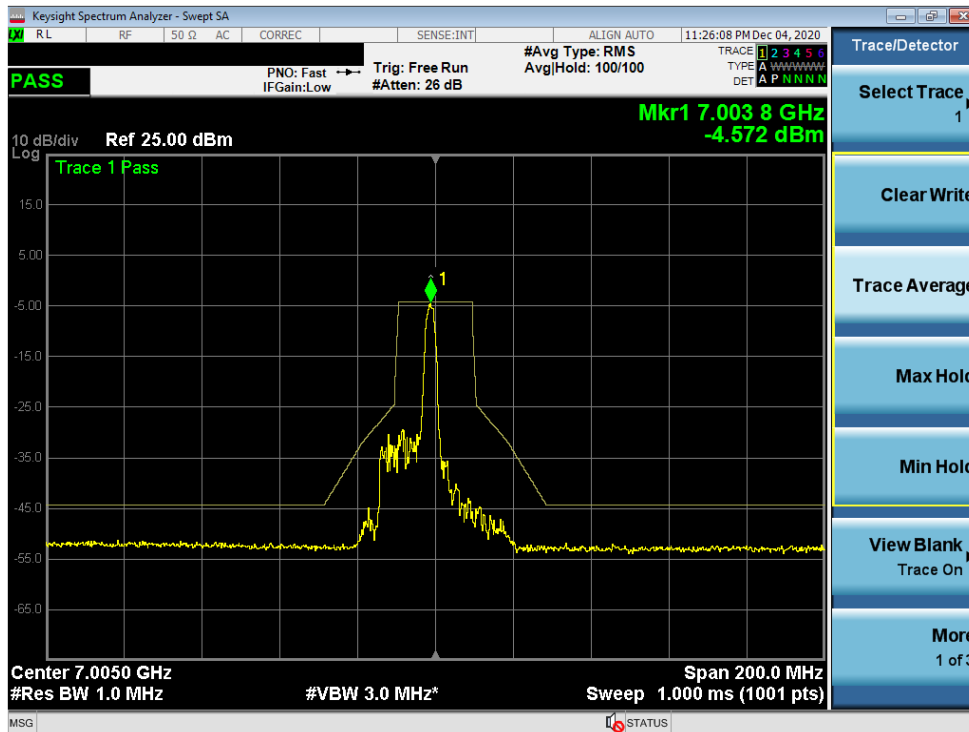

Plot 7-360. In-Band Emissions Plot MIMO ANT2 (40MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 211)


| | | | | |
|--|--|---------------------------------------|----------------|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 220 of 276 |

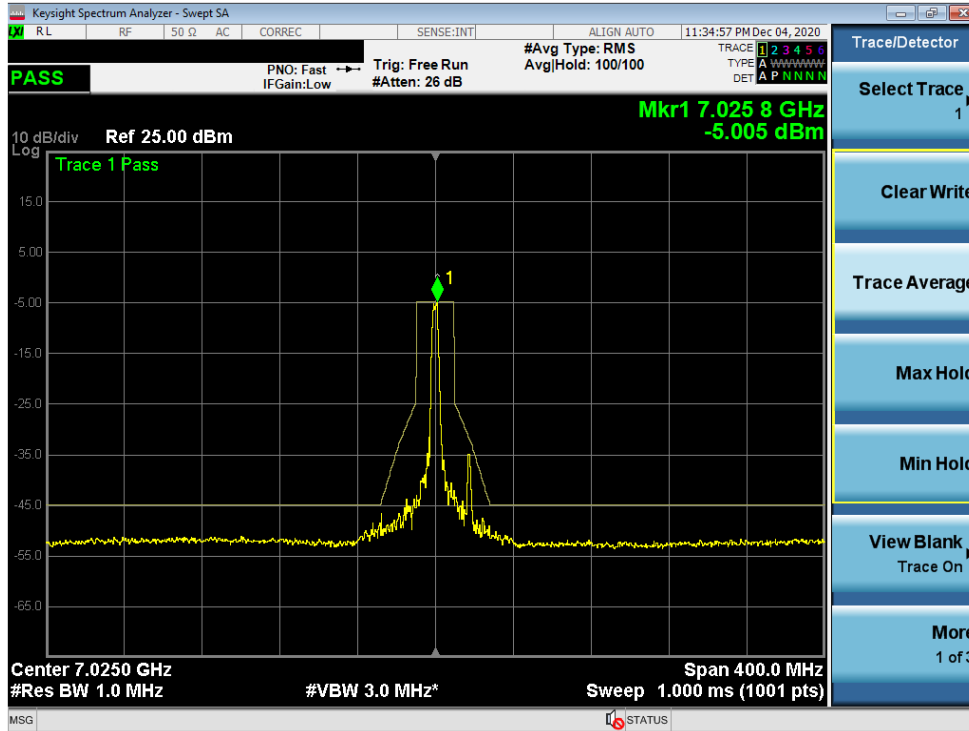


Plot 7-363. In-Band Emissions Plot MIMO ANT2 (80MHz BW 802.11ax (26 Tones) (UNII Band 8) – Ch. 215)

| | | | | |
|--|---------------------------------------|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 222 of 276 |

MIMO Antenna-2 In-Band Emissions Measurements (Full Tones)

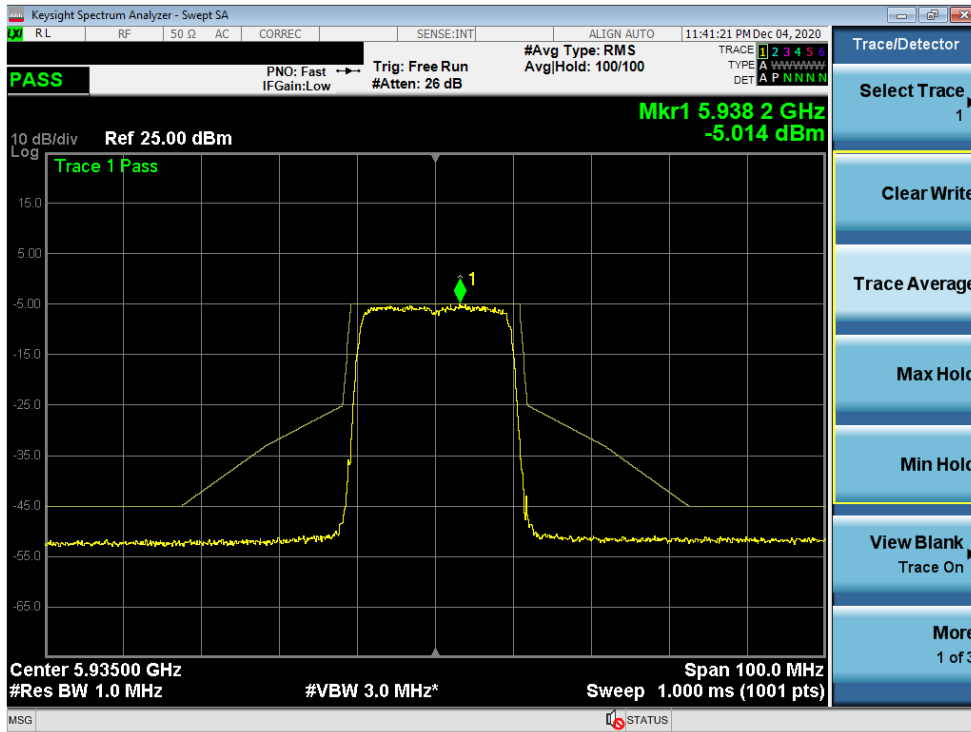


Plot 7-364. In-Band Emissions Plot MIMO ANT1 (20MHz BW 802.11ax (Full Tones) UNII Band 5) – Ch. 2)

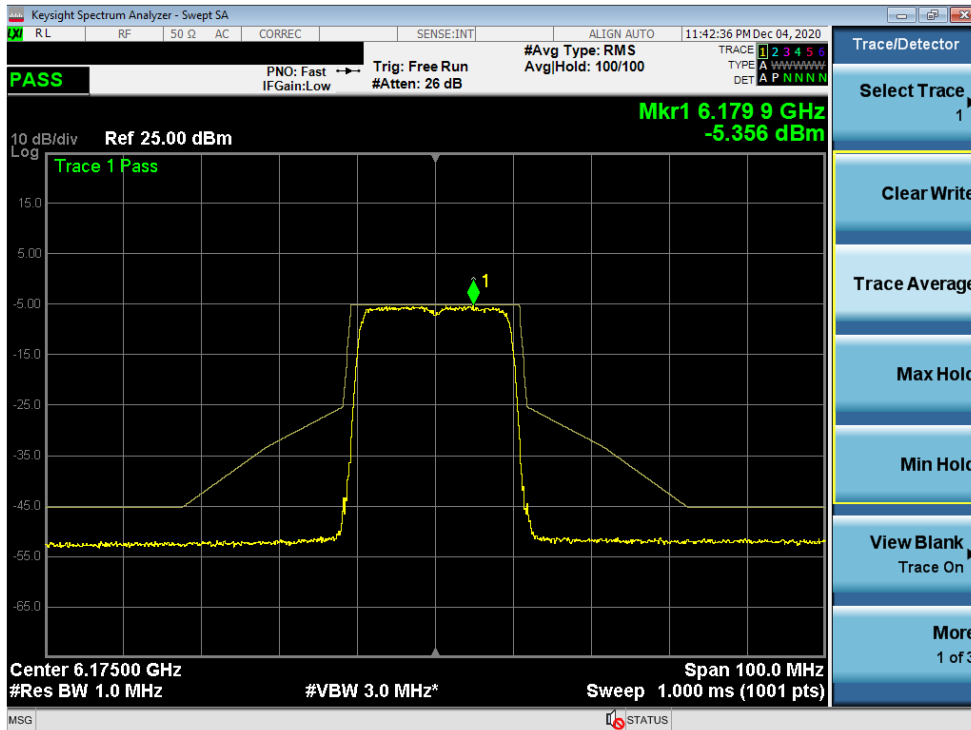


Plot 7-365. In-Band Emissions Plot MIMO ANT1 (20MHz BW 802.11ax (Full Tones) (UNII Band 5) – Ch. 45)

| | | | | |
|--|-------------------------------------|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 223 of 276 |

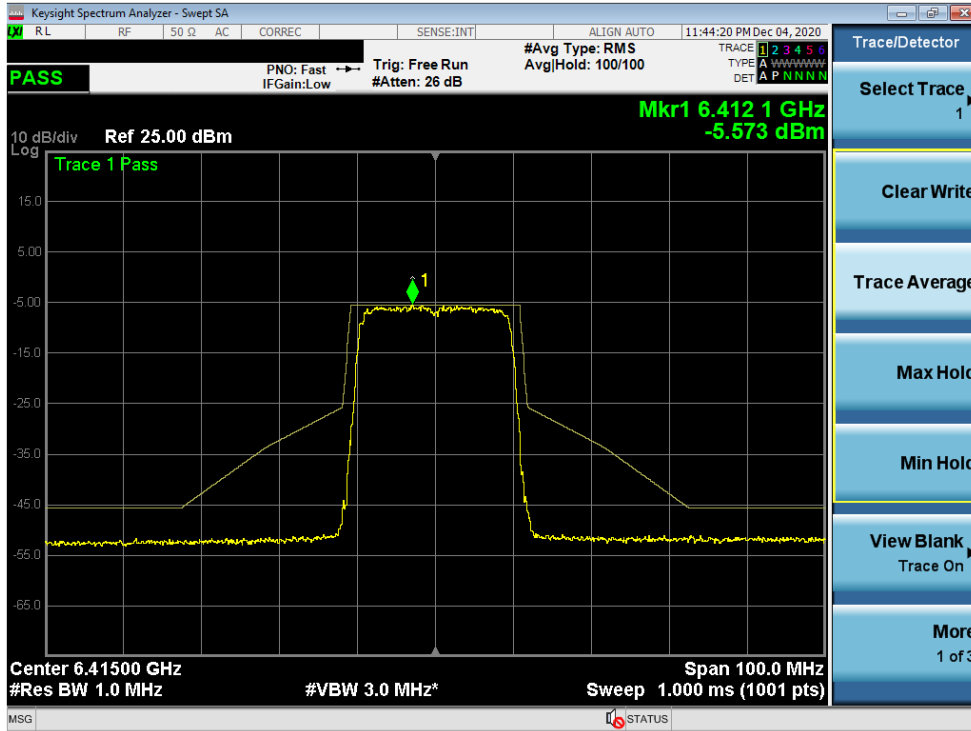


Plot 7-366. In-Band Emissions Plot MIMO ANT1 (20MHz BW 802.11ax (Full Tones) UNII Band 5) – Ch. 93)

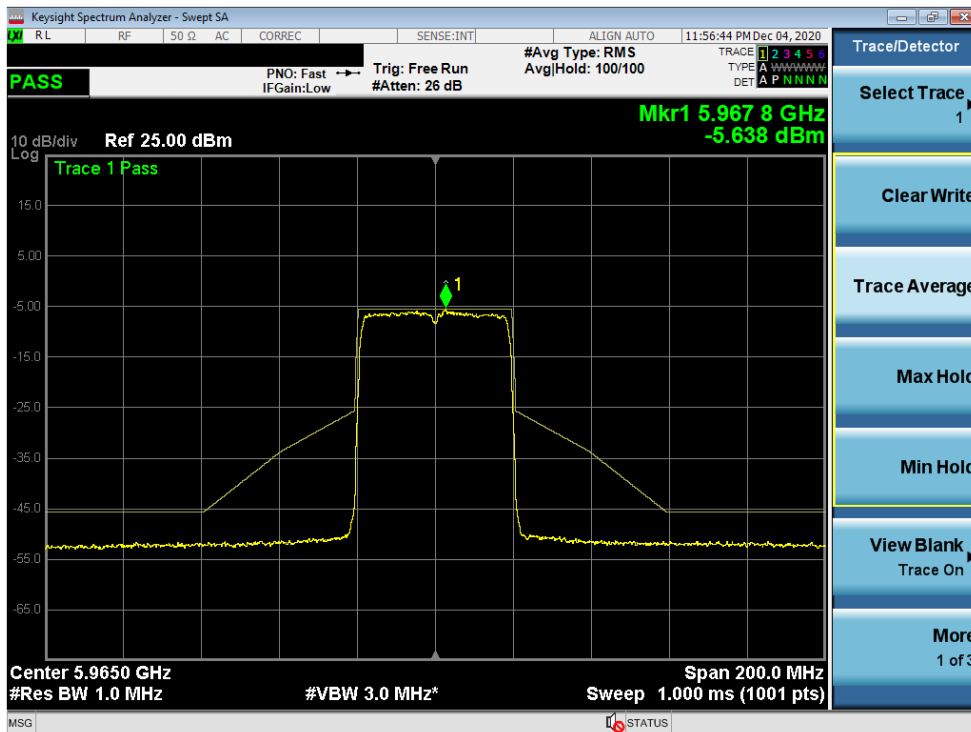


Plot 7-367. In-Band Emissions Plot MIMO ANT1 (40MHz BW 802.11ax (Full Tones) (UNII Band 5) – Ch. 3)

| | | | | |
|--|-------------------------------------|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 224 of 276 |

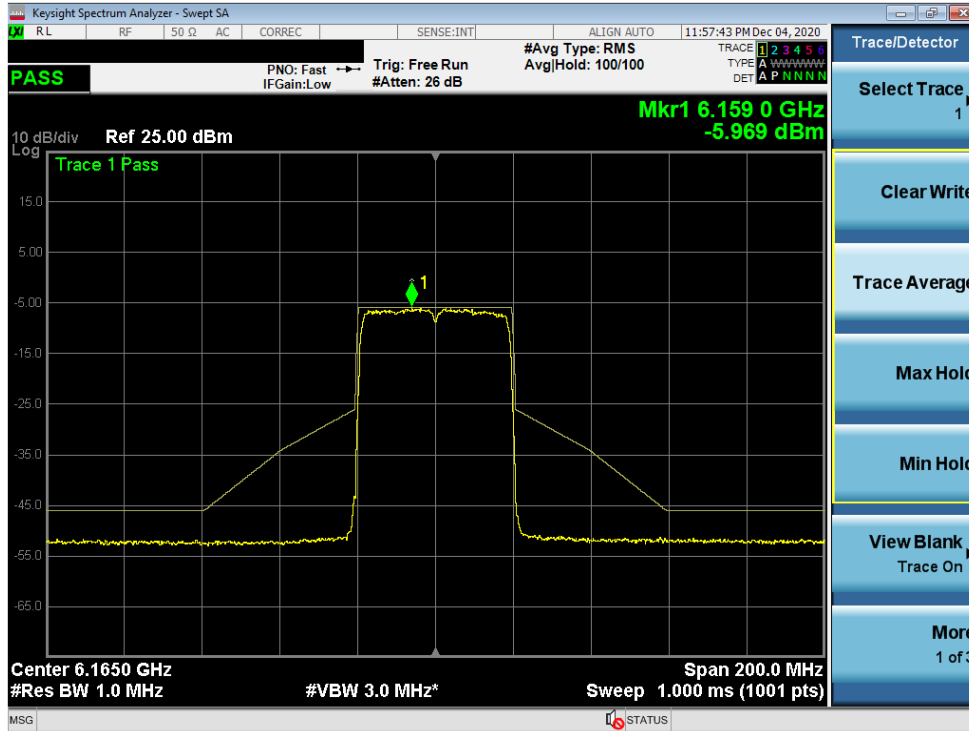


Plot 7-368. In-Band Emissions Plot MIMO ANT1 (40MHz BW 802.11ax (Full Tones) (UNII Band 5) – Ch. 43)

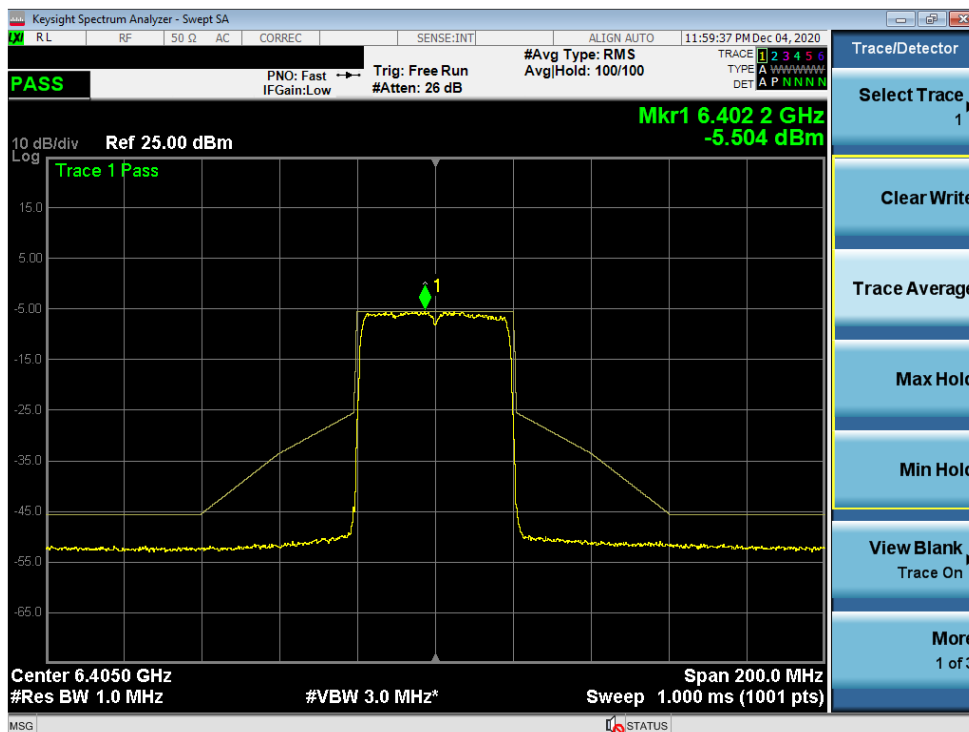


Plot 7-369. In-Band Emissions Plot MIMO ANT1 (40MHz BW 802.11ax (Full Tones) (UNII Band 5) – Ch. 91)

| | | | | |
|--|--|---------------------------------------|----------------|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 225 of 276 |

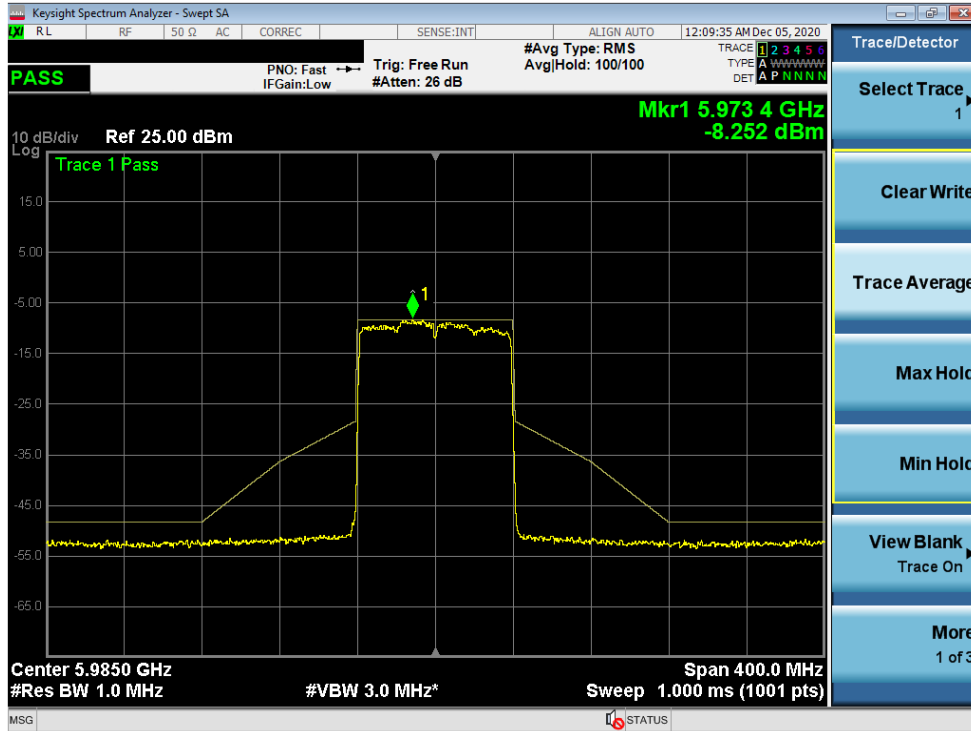


Plot 7-370. In-Band Emissions Plot MIMO ANT1 (80MHz BW 802.11ax (Full Tones) (UNII Band 5) – Ch. 7)

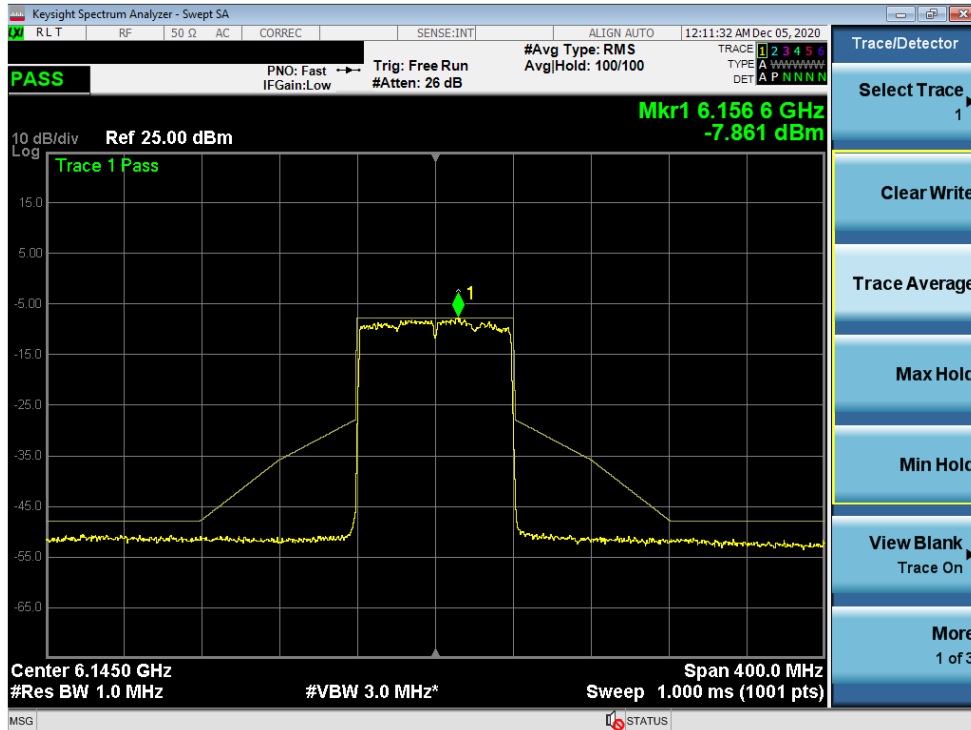


Plot 7-371. In-Band Emissions Plot MIMO ANT1 (80MHz BW 802.11ax (Full Tones) (UNII Band 5) – Ch. 39)

| | | | | |
|--|--|---------------------------------------|----------------|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 226 of 276 |

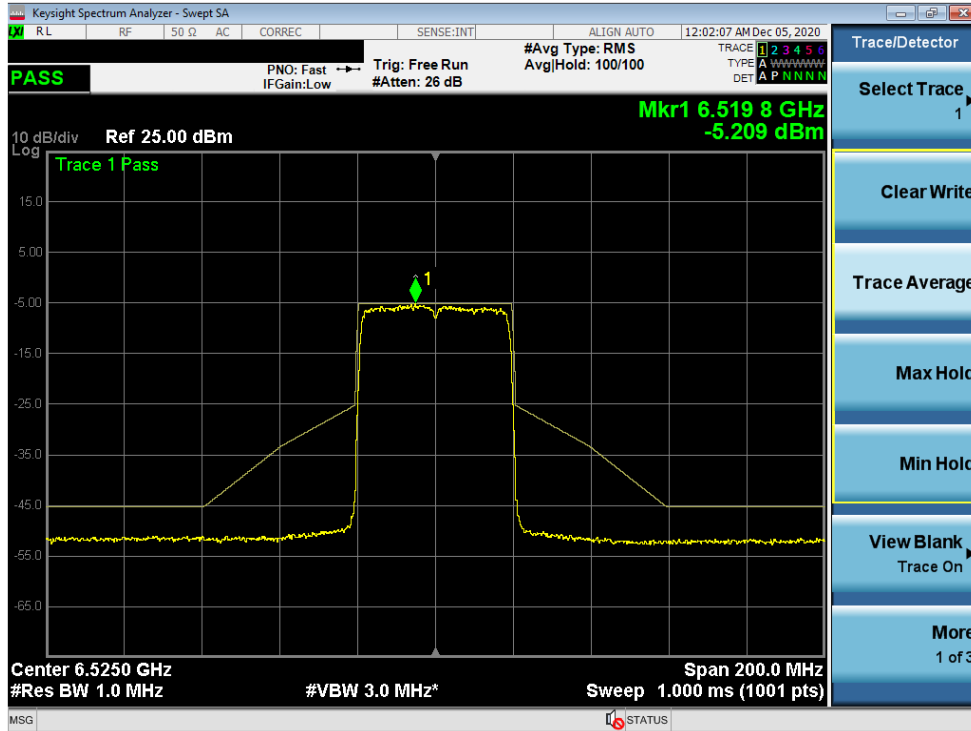


Plot 7-378. In-Band Emissions Plot MIMO ANT1 (40MHz BW 802.11ax (Full Tones) (UNII Band 6) – Ch. 115)

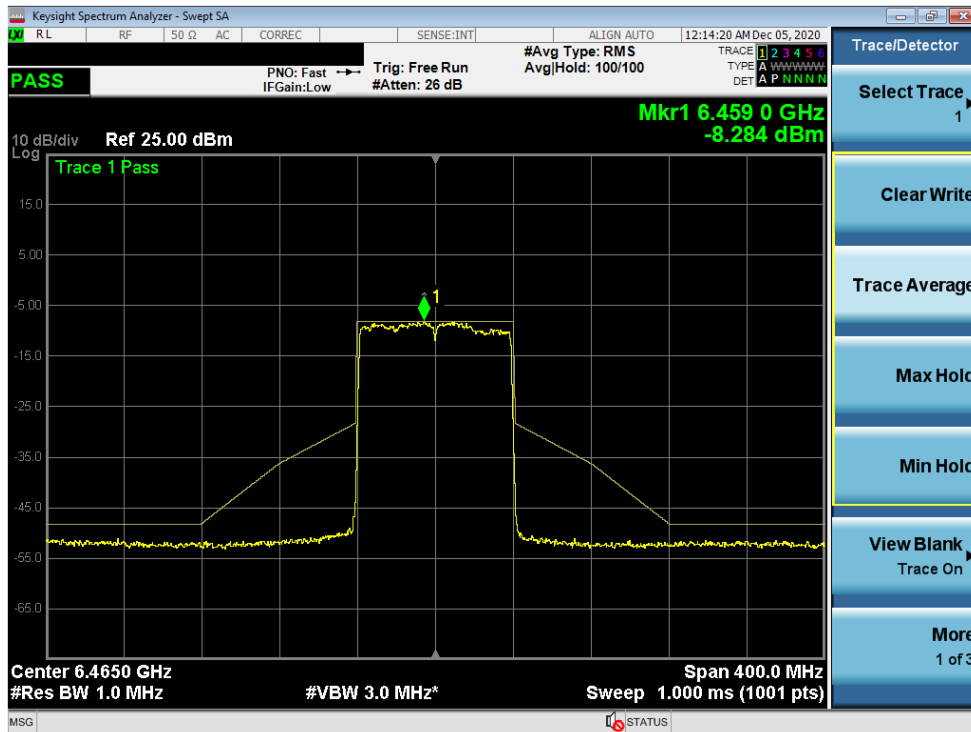


Plot 7-379. In-Band Emissions Plot MIMO ANT1 (80MHz BW 802.11ax (Full Tones) (UNII Band 6) – Ch. 103)

| | | | | |
|--|---------------------------------------|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 230 of 276 |

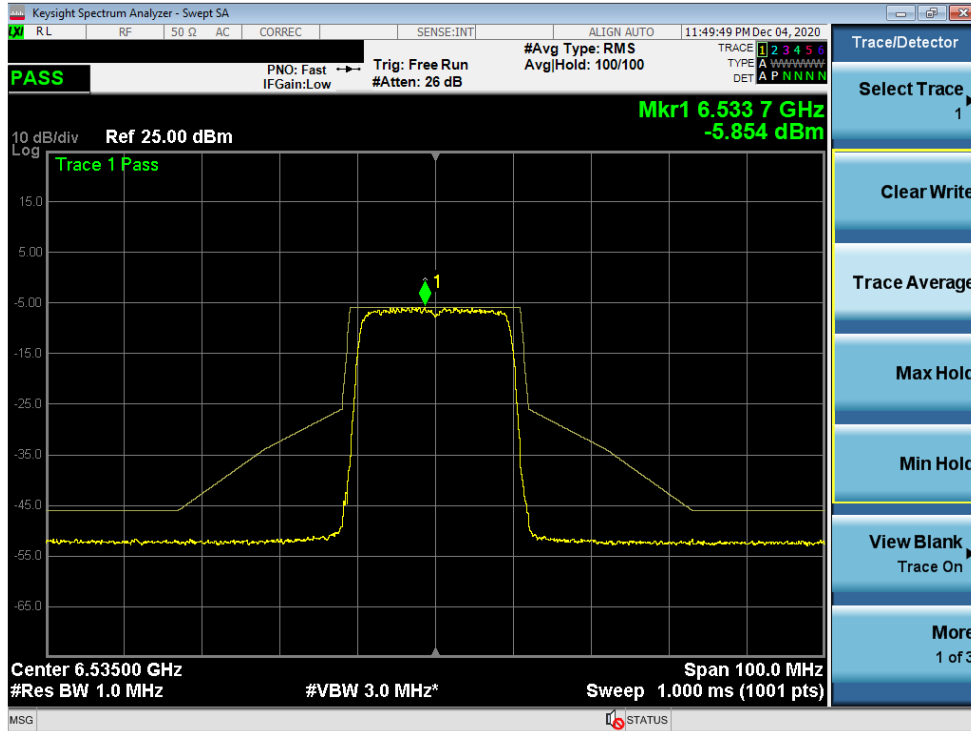


Plot 7-380. In-Band Emissions Plot MIMO ANT1 (20MHz BW 802.11ax (Full Tones) (UNII Band 7) – Ch. 117)

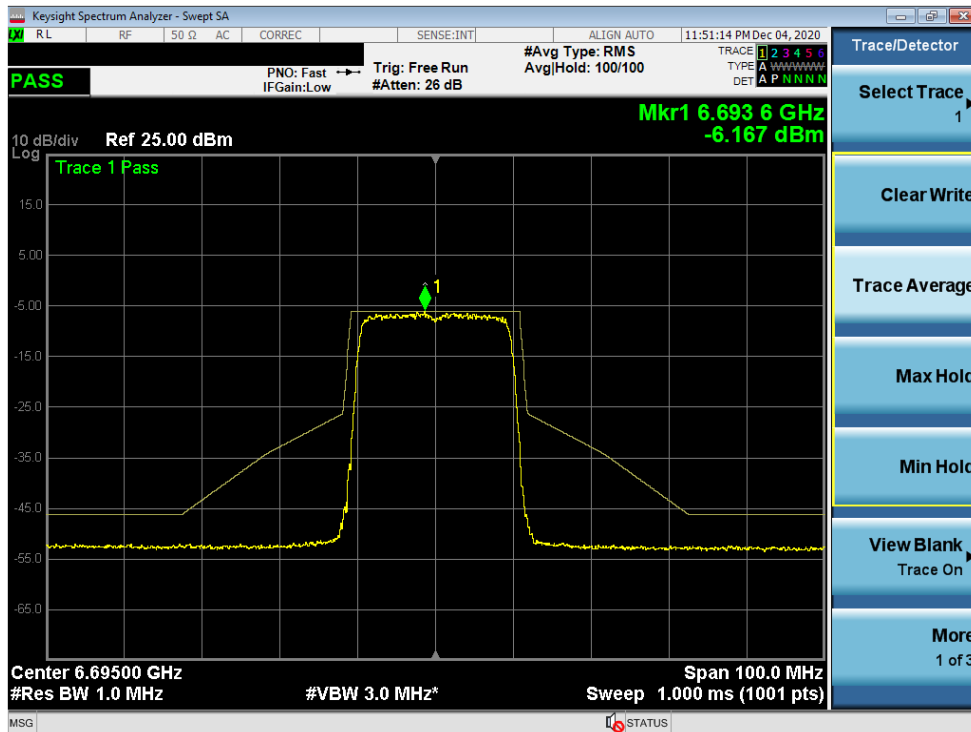


Plot 7-381. In-Band Emissions Plot MIMO ANT1 (20MHz BW 802.11ax (Full Tones) (UNII Band 7) – Ch. 149)

| | | | | |
|--|--|---------------------------------------|----------------|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 231 of 276 |

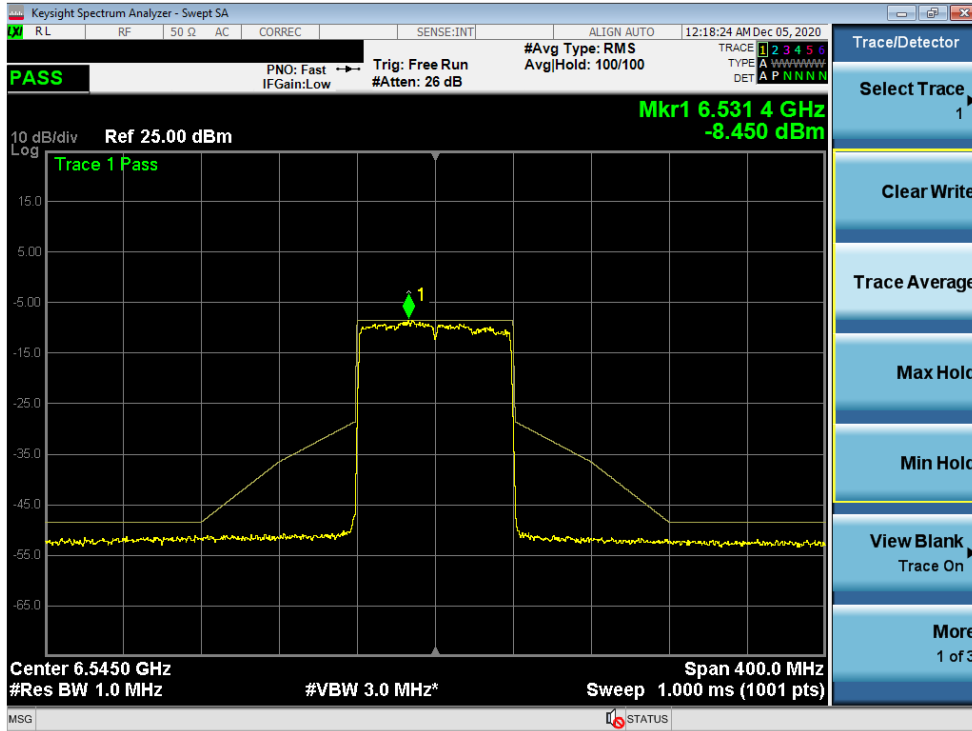


Plot 7-386. In-Band Emissions Plot MIMO ANT1 (80MHz BW 802.11ax (Full Tones) (UNII Band 7) – Ch. 119)

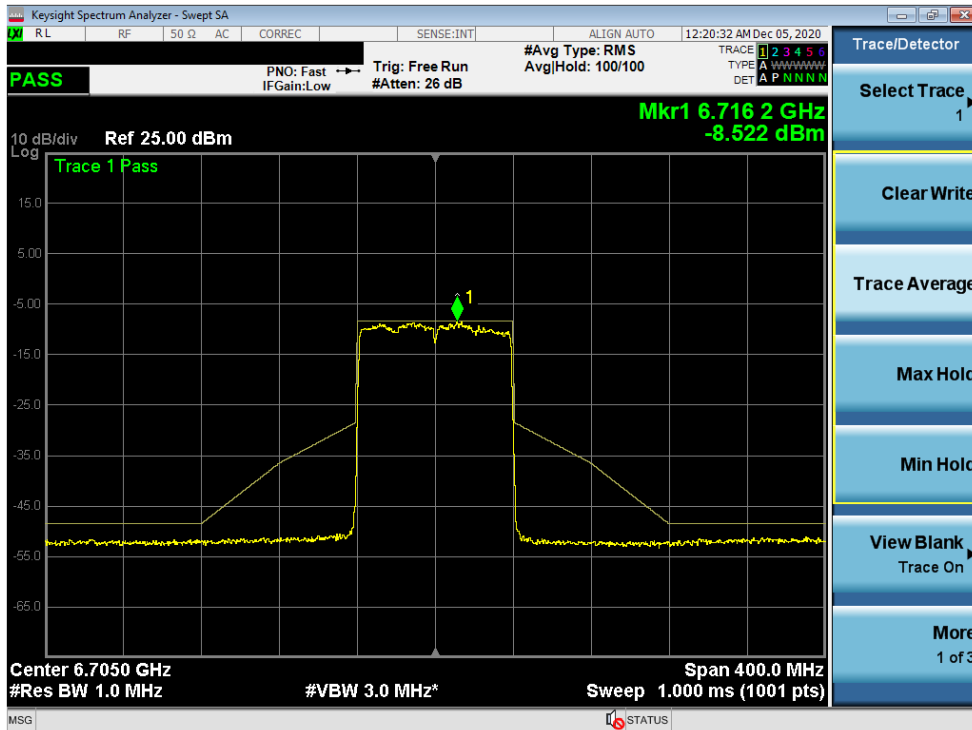


Plot 7-387. In-Band Emissions Plot MIMO ANT1 (80MHz BW 802.11ax (Full Tones) (UNII Band 7) – Ch. 151)

| | | | | |
|--|--|---------------------------------------|----------------|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 234 of 276 |

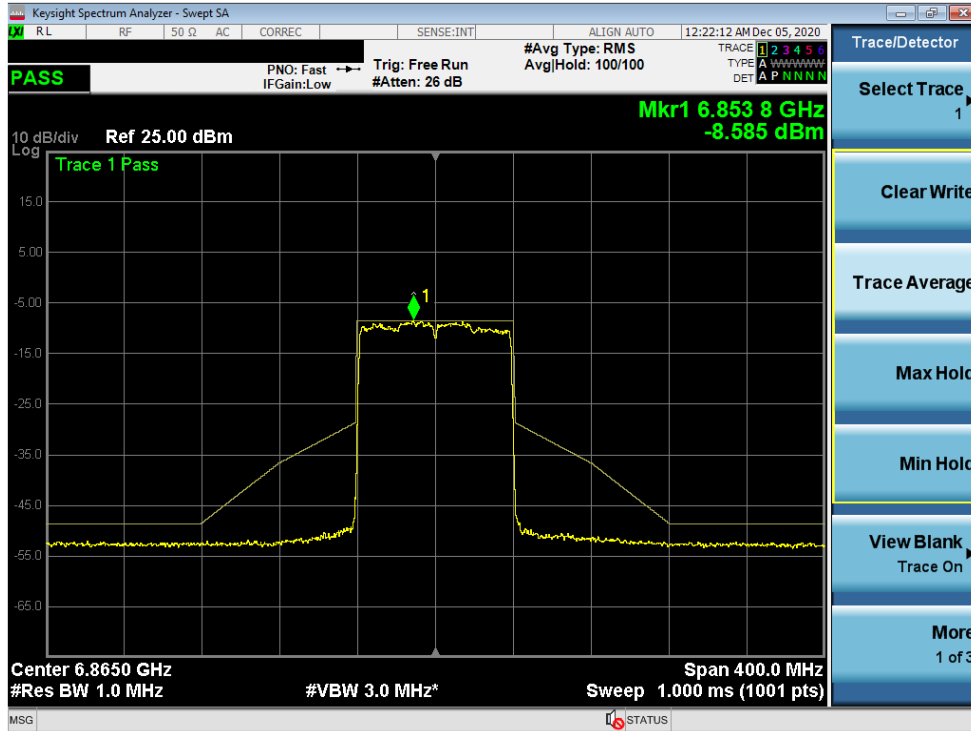


Plot 7-388. In-Band Emissions Plot MIMO ANT1 (80MHz BW 802.11ax (Full Tones) (UNII Band 7) – Ch. 183)

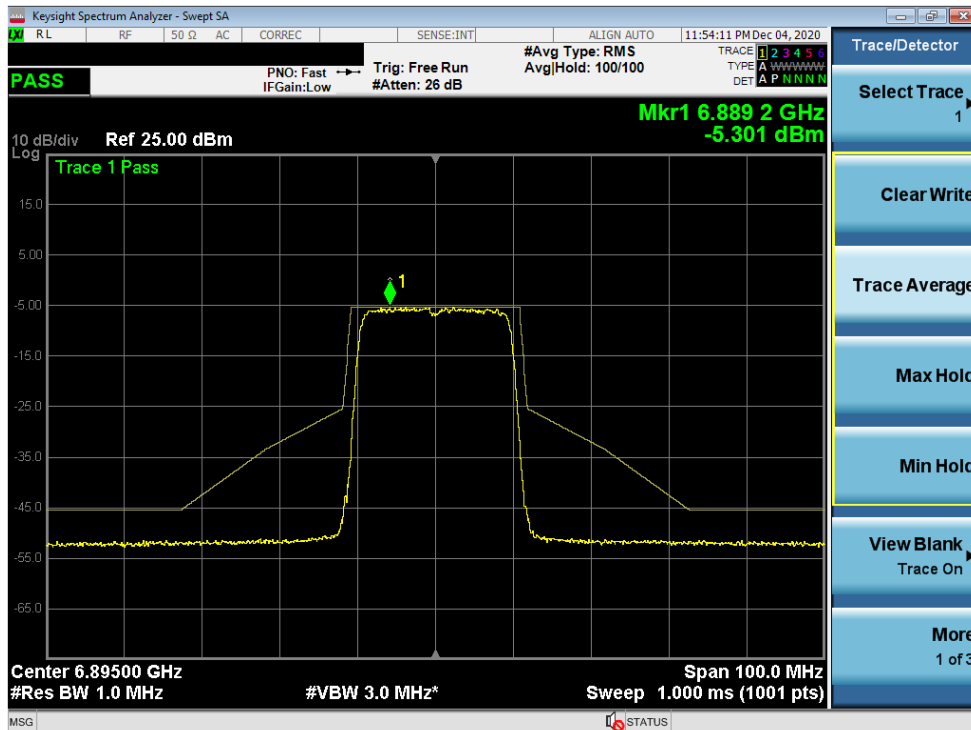


Plot 7-389. In-Band Emissions Plot MIMO ANT1 (20MHz BW 802.11ax (Full Tones) (UNII Band 8) – Ch. 189)

| | | | | |
|--|-------------------------------------|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 235 of 276 |

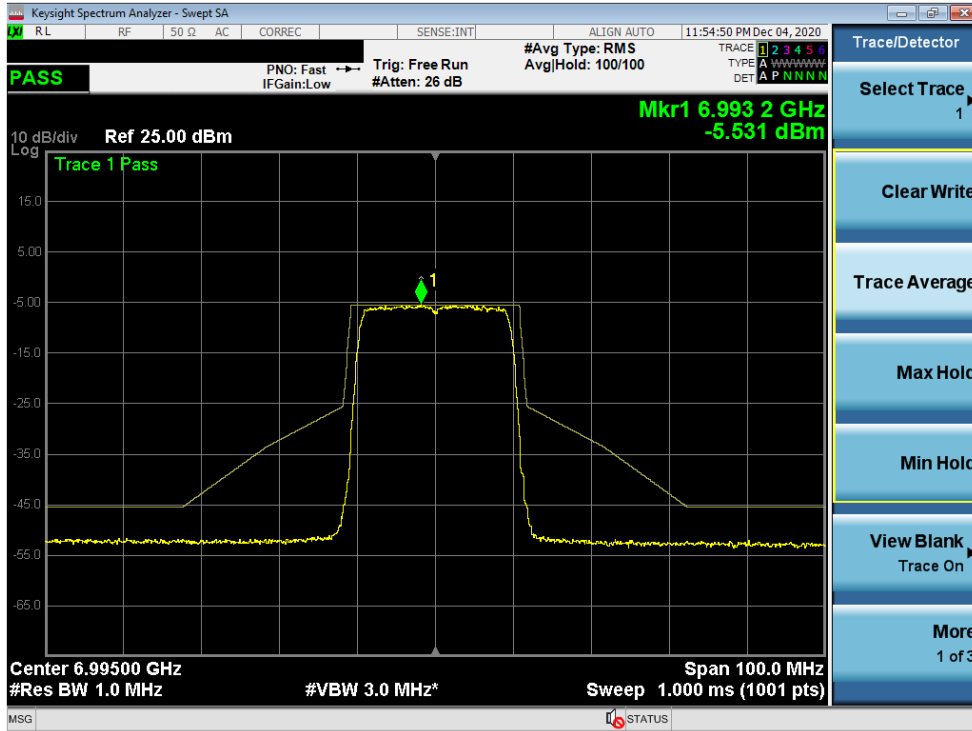


Plot 7-390. In-Band Emissions Plot MIMO ANT1 (20MHz BW 802.11ax (Full Tones) (UNII Band 8) – Ch. 209)

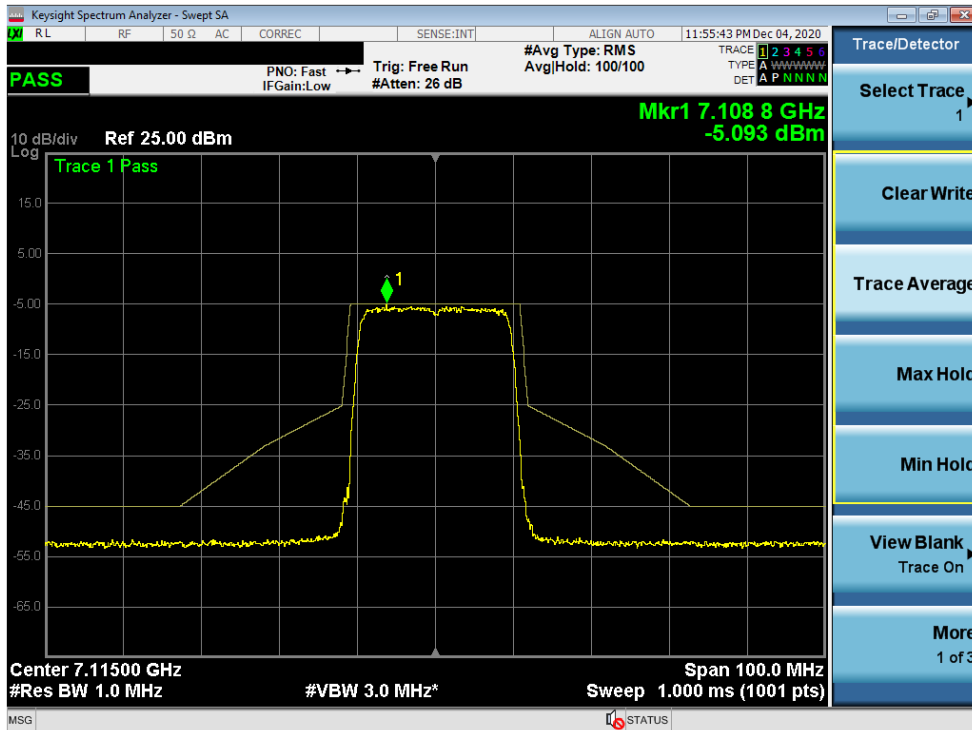


Plot 7-391. In-Band Emissions Plot MIMO ANT1 (20MHz BW 802.11ax (Full Tones) (UNII Band 8) – Ch. 233)

| | | | | |
|--|--|---------------------------------------|----------------|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 236 of 276 |

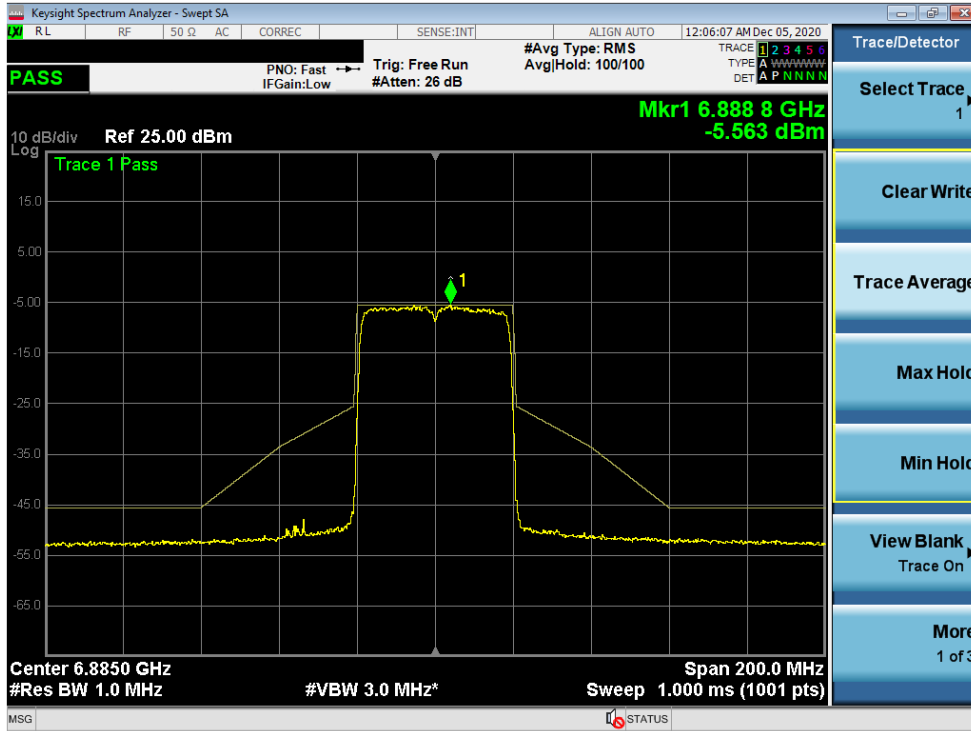


Plot 7-392. In-Band Emissions Plot MIMO ANT1 (40MHz BW 802.11ax (Full Tones) (UNII Band 8) – Ch. 187)

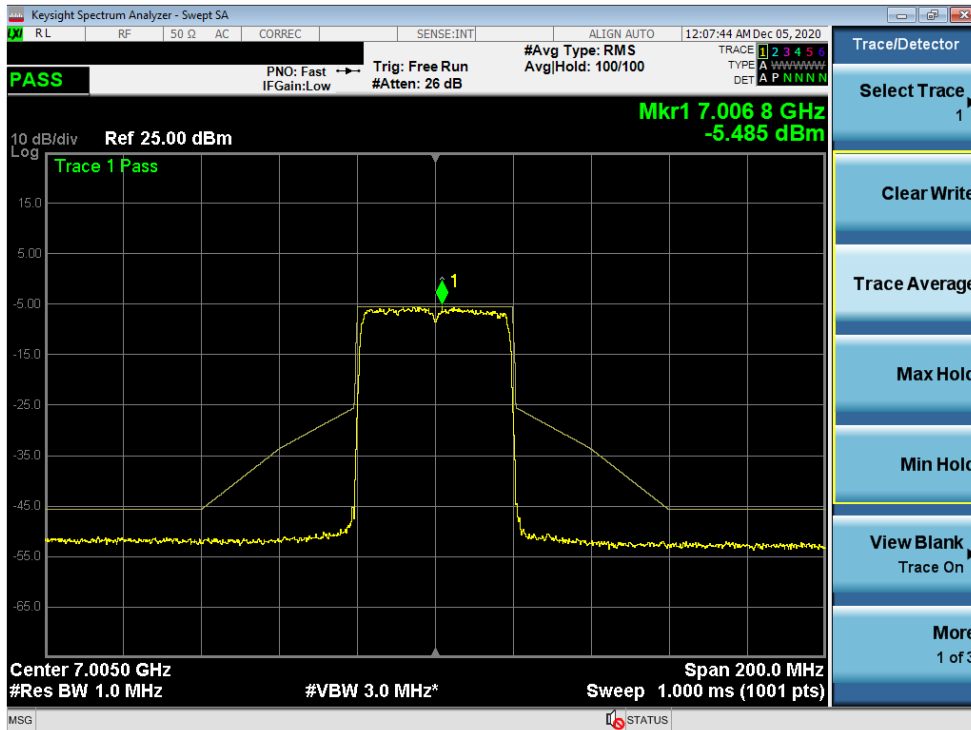


Plot 7-393. In-Band Emissions Plot MIMO ANT1 (40MHz BW 802.11ax (Full Tones) (UNII Band 8) – Ch. 211)

| | | | | |
|--|-------------------------------------|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 237 of 276 |

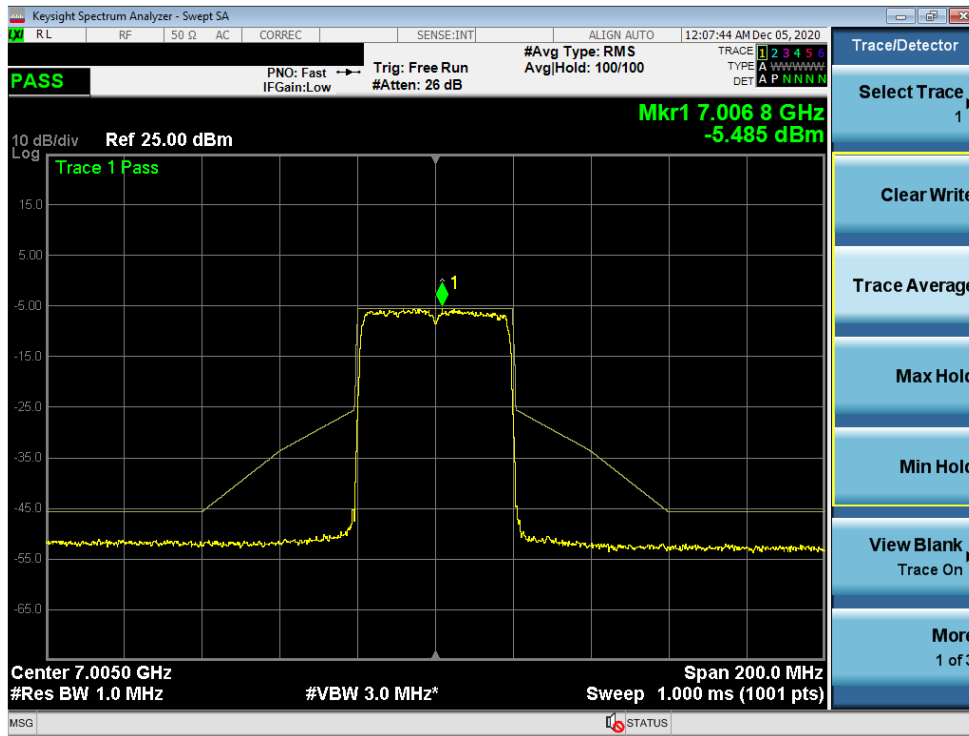


Plot 7-394. In-Band Emissions Plot MIMO ANT1 (40MHz BW 802.11ax (Full Tones) (UNII Band 8) – Ch. 227)

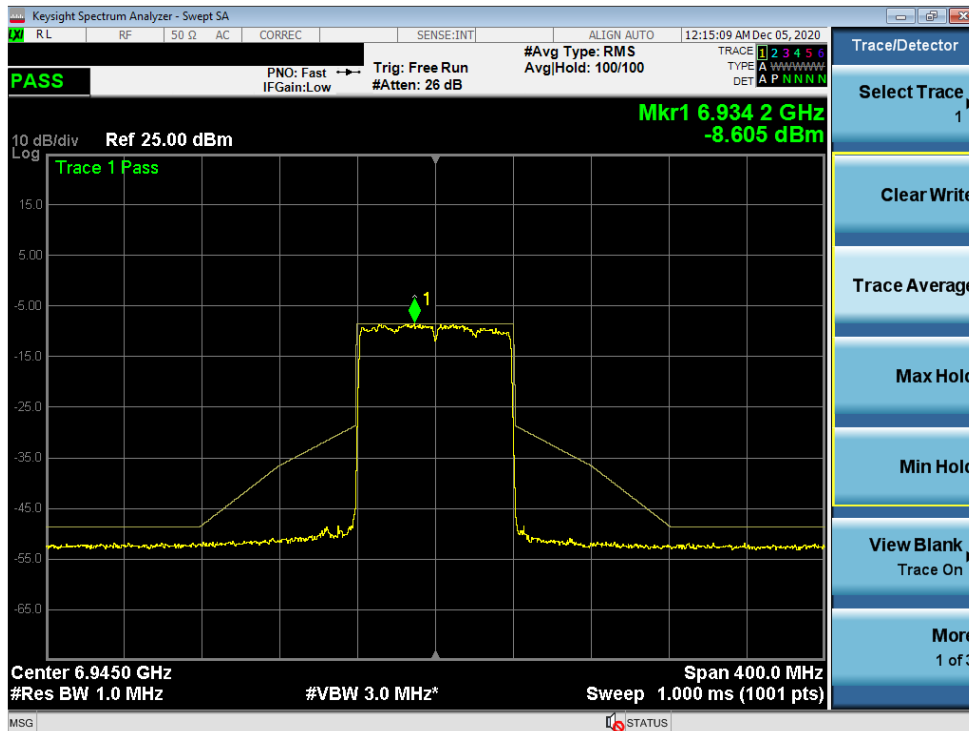

Plot 7-395. In-Band Emissions Plot MIMO ANT1 (80MHz BW 802.11ax (Full Tones) (UNII Band 8) – Ch. 199)

| | | | | |
|--|-------------------------------------|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 238 of 276 |

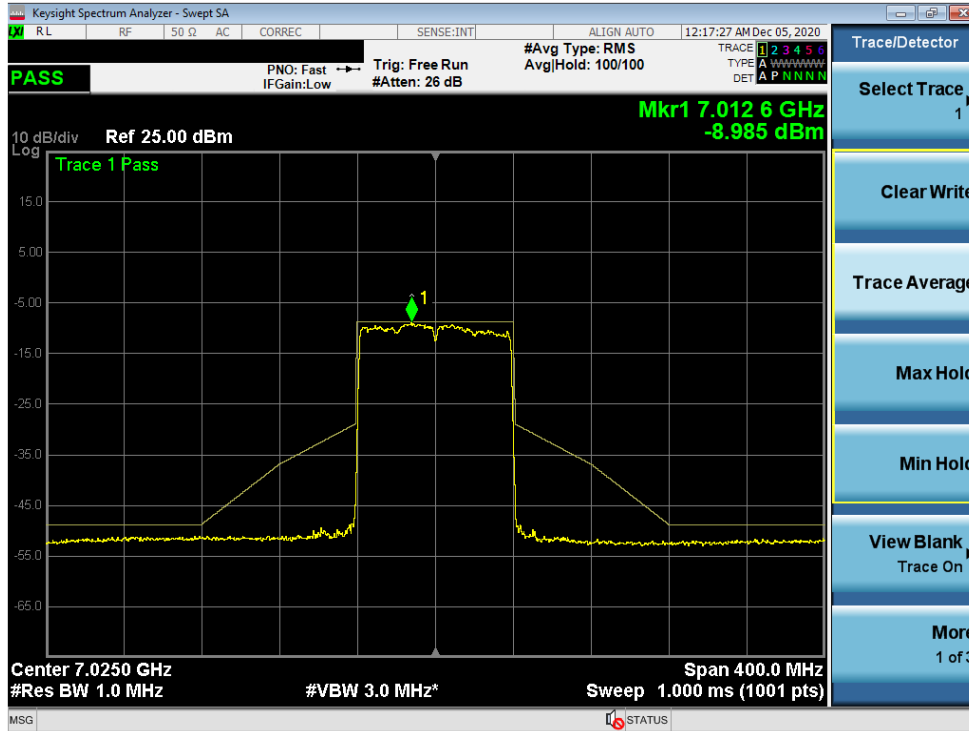

Plot 7-396. In-Band Emissions Plot MIMO ANT1 (80MHz BW 802.11ax (Full Tones) (UNII Band 8) – Ch. 215)

| | | | | |
|--|--|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  PCTEST Proud to be part of  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 239 of 276 |

7.6 Contention Based Protocol – 802.11ax §15.407(d)(6)

Test Overview and Limit

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
KDB 987594 D02

Test Settings

- 1) Configure the EUT to transmit with a constant duty cycle.
- 2) Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
- 3) Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
- 4) Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
- 5) Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- 6) Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
- 7) Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
- 8) Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
- 9) (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
- 10) Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

| | | | | |
|--|--|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  PCTEST® Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 240 of 276 |

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


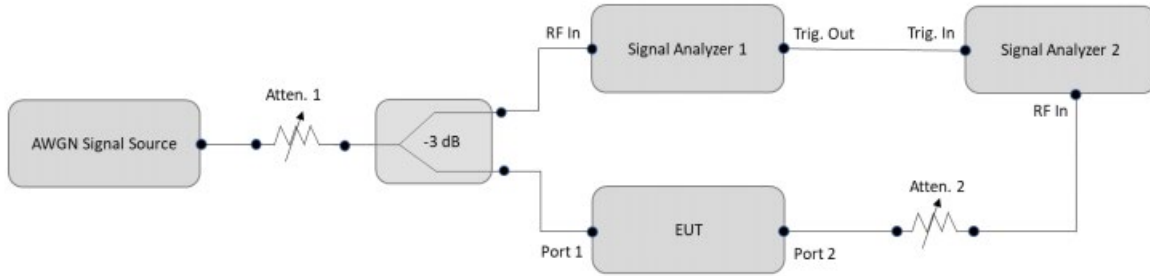


Figure 7-5. Test Instrument & Measurement Setup

Test Notes


1. Per guidance from KDB 987594 D02, contention based protocol was tested using an AWGN signal with a bandwidth of 10MHz (see Plot 7-397). The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission (see Plot 7-398), marker indicates the point at which the AWGN signal is introduced.
2. Per 987594 D02, the detection threshold at the antenna port is calculated in the following way, where G is the gain of the antenna.

$$Detection\ Threshold = -62.0 [dBm] - G [dBi]$$

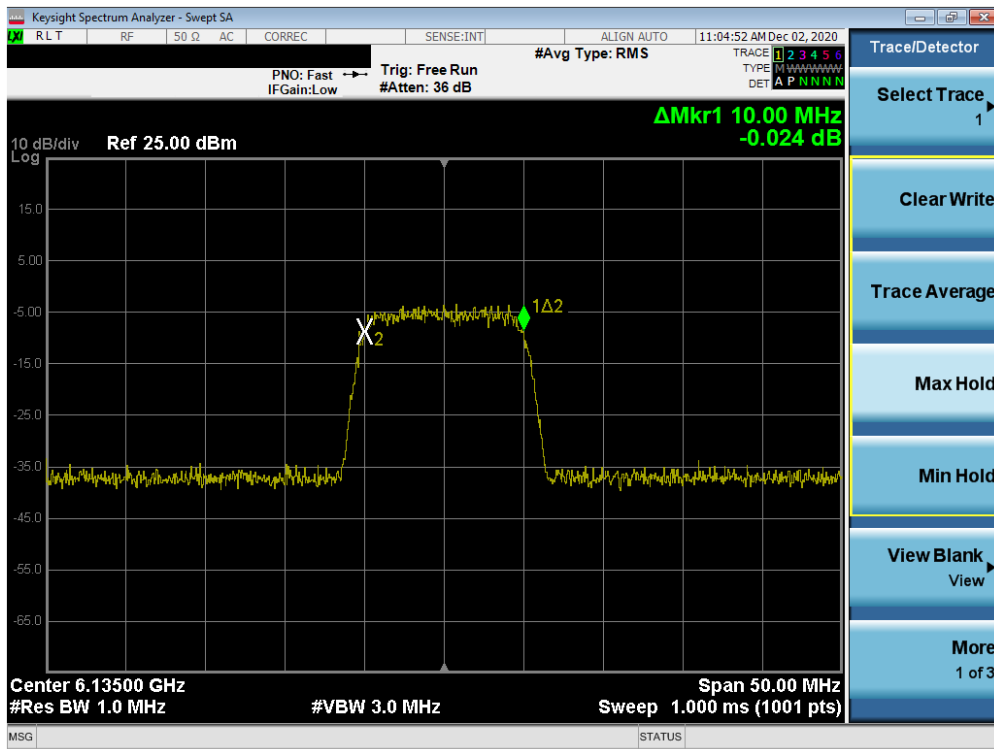

Plot 7-397. AWGN Sample Signal

| | | | | |
|--|--|---------------------------------------|----------------|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 241 of 276 |

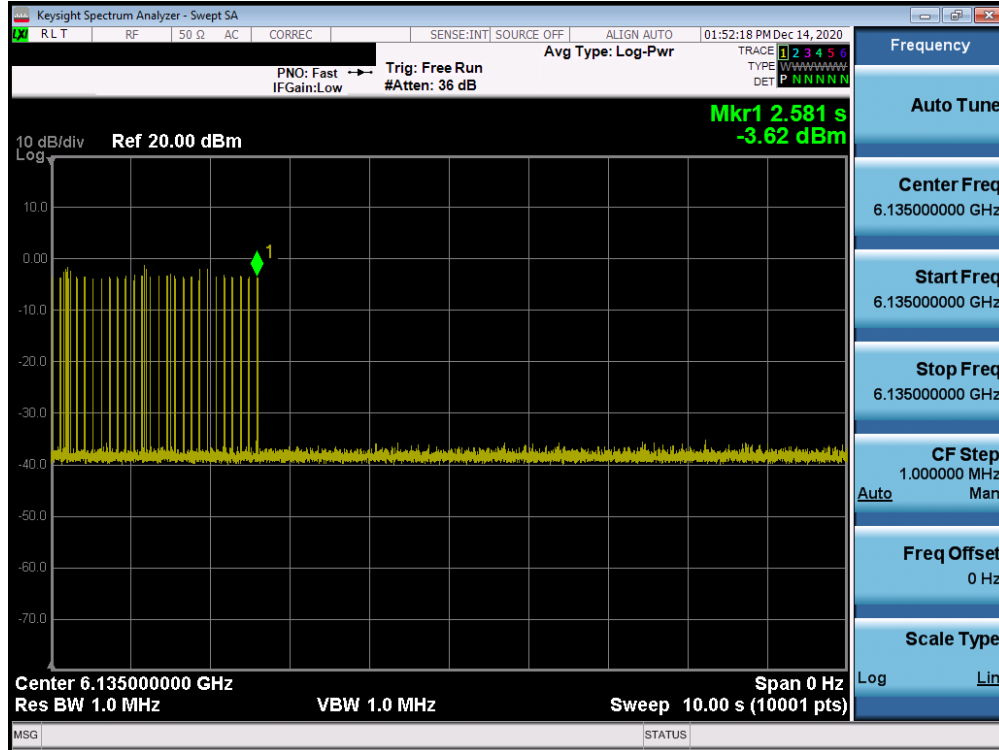

Plot 7-398. Contention Based Protocol Timing Plot

| Band | Channel | Channel Freq [MHz] | Channel BW [MHz] | Incumbent Freq [MHz] | Detection Power Level [dBm] | Antenna Gain [dBi] | Detection Limit [dBm] | Modified Detection Limit [dBm] | Margin [dB] |
|-------------|---------|--------------------|------------------|----------------------|-----------------------------|--------------------|-----------------------|--------------------------------|-------------|
| UNII Band 5 | 37 | 6135 | 20 | 6135 | -69.01 | -0.89 | -62.0 | -61.11 | -7.9 |
| | | | | 6110 | -65.46 | -0.89 | -62.0 | -61.11 | -4.35 |
| | 47 | 6185 | 160 | 6175 | -67.52 | -0.89 | -62.0 | -61.11 | -6.41 |
| | | | | 6240 | -67.15 | -0.89 | -62.0 | -61.11 | -6.04 |
| UNII Band 6 | 101 | 6455 | 20 | 6455 | -71.22 | -1.55 | -62.0 | -60.45 | -10.77 |
| | | | | 6435 | -70.16 | -1.55 | -62.0 | -60.45 | -9.71 |
| | 111 | 6505 | 160 | 6495 | -73.46 | -1.55 | -62.0 | -60.45 | -13.01 |
| | | | | 6575 | -68.66 | -1.55 | -62.0 | -60.45 | -8.21 |
| UNII Band 7 | 149 | 6695 | 20 | 6695 | -70.98 | -1.55 | -62.0 | -60.45 | -10.53 |
| | | | | 6595 | -70.82 | -1.55 | -62.0 | -60.45 | -10.37 |
| | 143 | 6665 | 160 | 6655 | -72.44 | -1.55 | -62.0 | -60.45 | -11.99 |
| | | | | 6735 | -68.36 | -1.55 | -62.0 | -60.45 | -7.91 |
| UNII Band 8 | 213 | 7015 | 20 | 7015 | -69.13 | -1.71 | -62.0 | -60.29 | -8.84 |
| | | | | 6915 | -69.22 | -1.71 | -62.0 | -60.29 | -8.93 |
| | 207 | 6985 | 160 | 6975 | -70.46 | -1.71 | -62.0 | -60.29 | -10.17 |
| | | | | 7055 | -66.44 | -1.71 | -62.0 | -60.29 | -6.15 |

Table 7-31. Contention Based Protocol – Incumbent Detection Results

| | | | | |
|--|---|---|--|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 242 of 276 |

| CBP Detection (1 = Detection, Blank = No Detection) | | | | | | | | | | | | | | |
|---|---------|--------------------|------------------|---|---|---|---|---|---|---|---|---|-----|--------------------|
| Band | Channel | Channel Freq [MHz] | Channel BW [MHz] | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | Detection Rate (%) |
| UNII Band 5 | 37 | 6135 | 20 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| | | | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| | 47 | 6185 | 160 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 | |
| | | | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| UNII Band 6 | 101 | 6455 | 20 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| | | | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| | 111 | 6505 | 160 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| | | | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| UNII Band 7 | 149 | 6695 | 20 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| | | | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| | 143 | 6665 | 160 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| | | | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| UNII Band 8 | 213 | 7015 | 20 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| | | | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| | 207 | 6985 | 160 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |
| | | | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100 |

Table 7-32. Contention Based Protocol – Incumbent Detection Trial Results

| | | | | |
|---|--|---|---|--|
| FCC ID: A3LSMG998B |  PCTEST Proud to be part of  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 243 of 276 | |

7.7 Radiated Spurious Emission Measurements – Above 1GHz

§15.205, §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-30 per Section 15.209.

| Frequency | Field Strength [$\mu\text{V/m}$] | Measured Distance [Meters] |
|-----------------|---------------------------------------|-------------------------------|
| Above 960.0 MHz | 500 | 3 |

Table 7-33. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 244 of 276 |

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

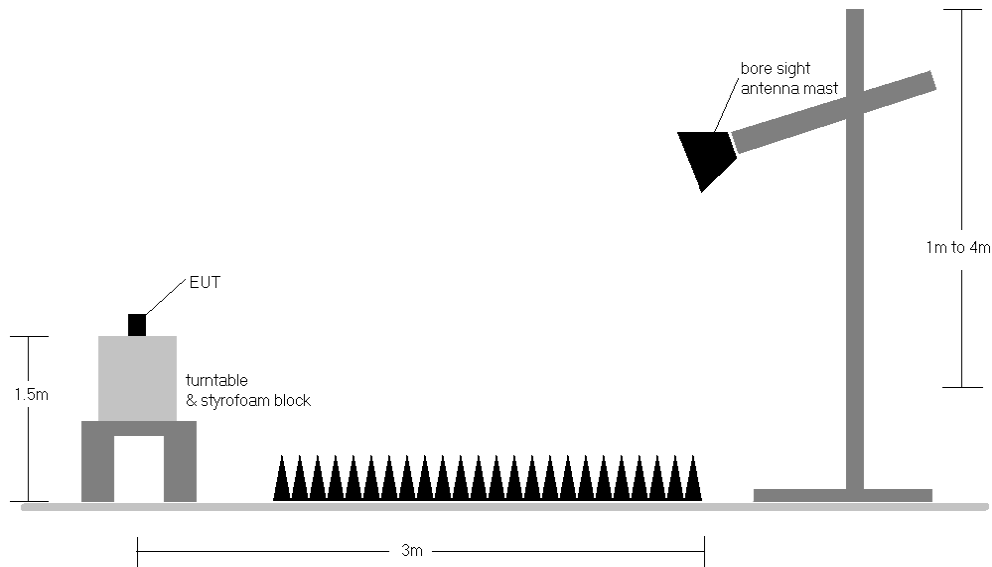


Figure 7-6. Test Instrument & Measurement Setup

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 245 of 276 |

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 7-33.
2. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-33. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB μ V/m]. If a peak measurement passes the average limit it was determined no further investigation is necessary.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested with its standard battery.
6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
10. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]

Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 246 of 276 |

6.6.1 MIMO Radiated Spurious Emission Measurements (26 Tones)

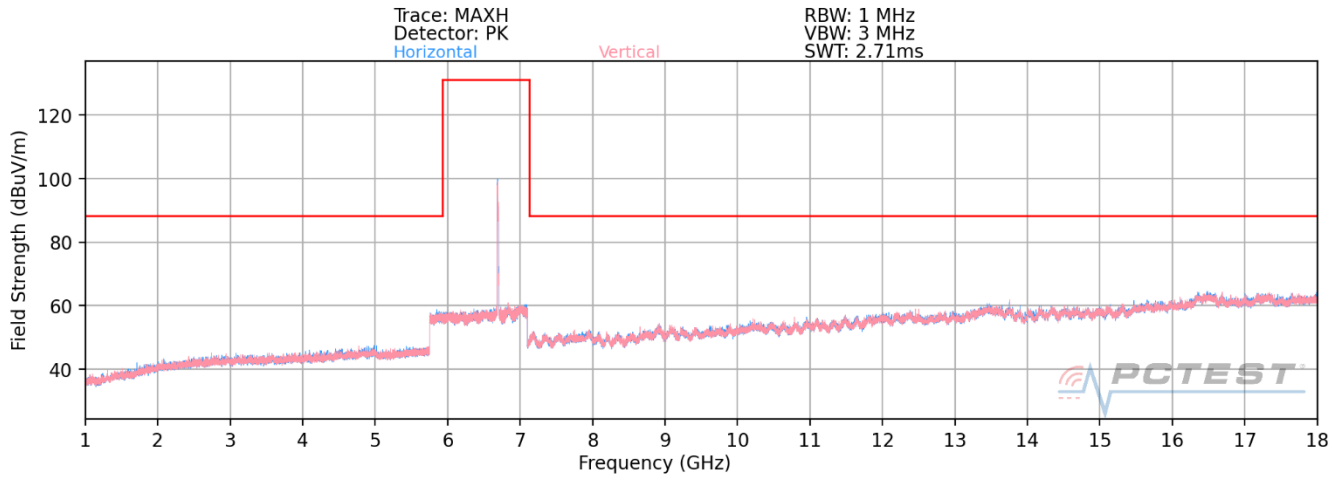

Plot 7-399. Radiated Spurious Plot above 1GHz MIMO (802.11ax)

| | | | |
|---|--|---|---|
| FCC ID: A3LSMG998B |  Proud to be part of  | MEASUREMENT REPORT (CERTIFICATION) |  Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 247 of 276 |

MIMO (26 Tones) Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5935MHz
 Channel: 2

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11870.00 | Average | V | - | - | -84.07 | 21.72 | 0.00 | 44.65 | 53.98 | -9.33 |
| * 11870.00 | Peak | V | - | - | -72.65 | 21.72 | 0.00 | 56.07 | 73.98 | -17.91 |
| * 17805.00 | Average | V | - | - | -84.99 | 29.06 | 0.00 | 51.07 | 53.98 | -2.91 |
| * 17805.00 | Peak | V | - | - | -73.66 | 29.06 | 0.00 | 62.40 | 73.98 | -11.58 |
| * 23740.00 | Average | V | - | - | -63.15 | 2.52 | -9.54 | 36.83 | 53.98 | -17.15 |
| * 23740.00 | Peak | V | - | - | -51.27 | 2.52 | -9.54 | 48.71 | 73.98 | -25.27 |
| 29675.00 | Peak | V | - | - | -50.91 | 3.77 | -9.54 | 50.32 | 68.20 | -17.88 |

Table 7-34. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 12350.00 | Average | V | - | - | -84.29 | 22.05 | 0.00 | 44.76 | 53.98 | -9.22 |
| * 12350.00 | Peak | V | - | - | -72.94 | 22.05 | 0.00 | 56.11 | 73.98 | -17.87 |
| * 18525.00 | Average | V | - | - | -62.37 | -0.07 | -9.54 | 35.02 | 53.98 | -18.96 |
| * 18525.00 | Peak | V | - | - | -50.46 | -0.07 | -9.54 | 46.93 | 73.98 | -27.05 |
| 24700.00 | Peak | V | - | - | -49.84 | 3.04 | -9.54 | 50.66 | 68.20 | -17.54 |
| 30875.00 | Peak | V | - | - | -50.44 | 4.26 | -9.54 | 51.27 | 68.20 | -16.93 |

Table 7-35. Radiated Measurements MIMO (26 Tones)

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 248 of 276 | |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 12830.00 | Peak | V | - | - | -73.38 | 22.76 | 0.00 | 56.38 | 68.20 | -11.82 |
| * 19245.00 | Average | V | - | - | -62.86 | 0.82 | -9.54 | 35.42 | 53.98 | -18.56 |
| * 19245.00 | Peak | V | - | - | -50.83 | 0.82 | -9.54 | 47.45 | 73.98 | -26.53 |
| 25660.00 | Peak | V | - | - | -50.91 | 4.39 | -9.54 | 50.94 | 68.20 | -17.26 |
| 32075.00 | Peak | V | - | - | -50.12 | 5.38 | -9.54 | 52.72 | 68.20 | -15.48 |

Table 7-36. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 12870.00 | Peak | V | - | - | -73.70 | 23.07 | 0.00 | 56.37 | 68.20 | -11.83 |
| * 19305.00 | Average | V | - | - | -62.69 | 0.70 | -9.54 | 35.46 | 53.98 | -18.51 |
| * 19305.00 | Peak | V | - | - | -50.50 | 0.70 | -9.54 | 47.65 | 73.98 | -26.32 |
| 25740.00 | Peak | V | - | - | -51.34 | 4.23 | -9.54 | 50.35 | 68.20 | -17.85 |
| 32175.00 | Peak | V | - | - | -50.80 | 5.13 | -9.54 | 51.79 | 68.20 | -16.41 |

Table 7-37. Radiated Measurements MIMO (26 Tones)

| | | | | |
|--|--|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  PCTEST Proud to be part of  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 249 of 276 |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 12950.00 | Peak | V | - | - | -72.60 | 23.37 | 0.00 | 57.77 | 68.20 | -10.43 |
| * 19425.00 | Average | V | - | - | -62.53 | 0.76 | -9.54 | 35.69 | 53.98 | -18.29 |
| * 19425.00 | Peak | V | - | - | -50.70 | 0.76 | -9.54 | 47.52 | 73.98 | -26.46 |
| 25900.00 | Peak | V | - | - | -50.77 | 4.37 | -9.54 | 51.06 | 68.20 | -17.14 |
| 32375.00 | Peak | V | - | - | -50.56 | 5.10 | -9.54 | 51.99 | 68.20 | -16.21 |

Table 7-38. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 13030.00 | Peak | V | - | - | -72.76 | 23.02 | 0.00 | 57.26 | 68.20 | -10.94 |
| * 19545.00 | Average | V | - | - | -62.87 | 0.88 | -9.54 | 35.47 | 53.98 | -18.51 |
| * 19545.00 | Peak | V | - | - | -50.67 | 0.88 | -9.54 | 47.67 | 73.98 | -26.31 |
| 26060.00 | Peak | V | - | - | -50.25 | 4.61 | -9.54 | 51.81 | 68.20 | -16.39 |
| 32575.00 | Peak | V | - | - | -50.06 | 5.09 | -9.54 | 52.49 | 68.20 | -15.71 |

Table 7-39. Radiated Measurements MIMO (26 Tones)

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 250 of 276 | |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 13070.00 | Peak | V | - | - | -72.76 | 23.23 | 0.00 | 57.47 | 68.20 | -10.73 |
| * 19605.00 | Average | V | - | - | -62.95 | 0.98 | -9.54 | 35.49 | 73.98 | -38.49 |
| * 19605.00 | Peak | V | - | - | -50.12 | 0.98 | -9.54 | 48.32 | 68.20 | -19.88 |
| 26140.00 | Peak | V | - | - | -50.53 | 4.49 | -9.54 | 51.42 | 68.20 | -16.78 |
| 32675.00 | Peak | V | - | - | -50.23 | 4.88 | -9.54 | 52.11 | 68.20 | -16.09 |

Table 7-40. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 13390.00 | Average | V | - | - | -84.09 | 24.35 | 0.00 | 47.26 | 53.98 | -6.72 |
| * 13390.00 | Peak | V | - | - | -72.69 | 24.35 | 0.00 | 58.66 | 73.98 | -15.32 |
| * 20085.00 | Average | V | - | - | -62.08 | 0.94 | -9.54 | 36.31 | 53.98 | -17.67 |
| * 20085.00 | Peak | V | - | - | -50.09 | 0.94 | -9.54 | 48.30 | 73.98 | -25.68 |
| 26780.00 | Peak | V | - | - | -50.66 | 4.32 | -9.54 | 51.11 | 68.20 | -17.09 |
| 33475.00 | Peak | V | - | - | -50.20 | 5.85 | -9.54 | 53.11 | 68.20 | -15.09 |

Table 7-41. Radiated Measurements MIMO (26 Tones)

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 251 of 276 | |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 13750.00 | Peak | V | - | - | -72.80 | 24.55 | 0.00 | 58.75 | 68.20 | -9.45 |
| * 20625.00 | Average | V | - | - | -64.22 | 1.47 | -9.54 | 34.71 | 53.98 | -19.27 |
| * 20625.00 | Peak | V | - | - | -51.99 | 1.47 | -9.54 | 46.94 | 73.98 | -27.04 |
| 27500.00 | Peak | V | - | - | -50.64 | 3.49 | -9.54 | 50.31 | 68.20 | -17.89 |
| 34375.00 | Peak | V | - | - | -50.51 | 7.16 | -9.54 | 54.11 | 68.20 | -14.09 |

Table 7-42. Radiated Measurements MIMO (26 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 13790.00 | Peak | V | - | - | -72.78 | 24.76 | 0.00 | 58.98 | 68.20 | -9.22 |
| * 20685.00 | Average | V | - | - | -64.12 | 1.38 | -9.54 | 34.72 | 53.98 | -19.26 |
| * 20685.00 | Peak | V | - | - | -51.49 | 1.38 | -9.54 | 47.35 | 73.98 | -26.63 |
| 27580.00 | Peak | V | - | - | -50.11 | 3.48 | -9.54 | 50.83 | 68.20 | -17.37 |
| 34475.00 | Peak | V | - | - | -50.84 | 7.52 | -9.54 | 54.14 | 68.20 | -14.06 |

Table 7-43. Radiated Measurements MIMO (26 Tones)

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 252 of 276 | |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 13990.00 | Peak | V | - | - | -73.29 | 24.14 | 0.00 | 57.85 | 68.20 | -10.35 |
| * 20985.00 | Average | V | - | - | -63.50 | 1.88 | -9.54 | 35.84 | 53.98 | -18.14 |
| * 20985.00 | Peak | V | - | - | -51.37 | 1.88 | -9.54 | 47.97 | 73.98 | -26.01 |
| 27980.00 | Peak | V | - | - | -50.86 | 3.63 | -9.54 | 50.23 | 68.20 | -17.97 |
| 34975.00 | Peak | V | - | - | -51.57 | 8.01 | -9.54 | 53.90 | 68.20 | -14.30 |

Table 7-44. Radiated Measurements MIMO (26 Tones)


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 14230.00 | Peak | V | - | - | -73.68 | 25.57 | 0.00 | 58.89 | 68.20 | -9.31 |
| * 21345.00 | Average | V | - | - | -63.88 | 1.90 | -9.54 | 35.48 | 53.98 | -18.50 |
| * 21345.00 | Peak | V | - | - | -51.55 | 1.90 | -9.54 | 47.81 | 73.98 | -26.17 |
| 28460.00 | Peak | V | - | - | -51.18 | 3.74 | -9.54 | 50.02 | 68.20 | -18.18 |
| 35575.00 | Peak | V | - | - | -50.21 | 3.74 | -9.54 | 50.99 | 68.20 | -17.21 |

Table 7-45. Radiated Measurements MIMO (26 Tones)

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 253 of 276 | |

6.6.2 MIMO Radiated Spurious Emission Measurements (242 Tones)

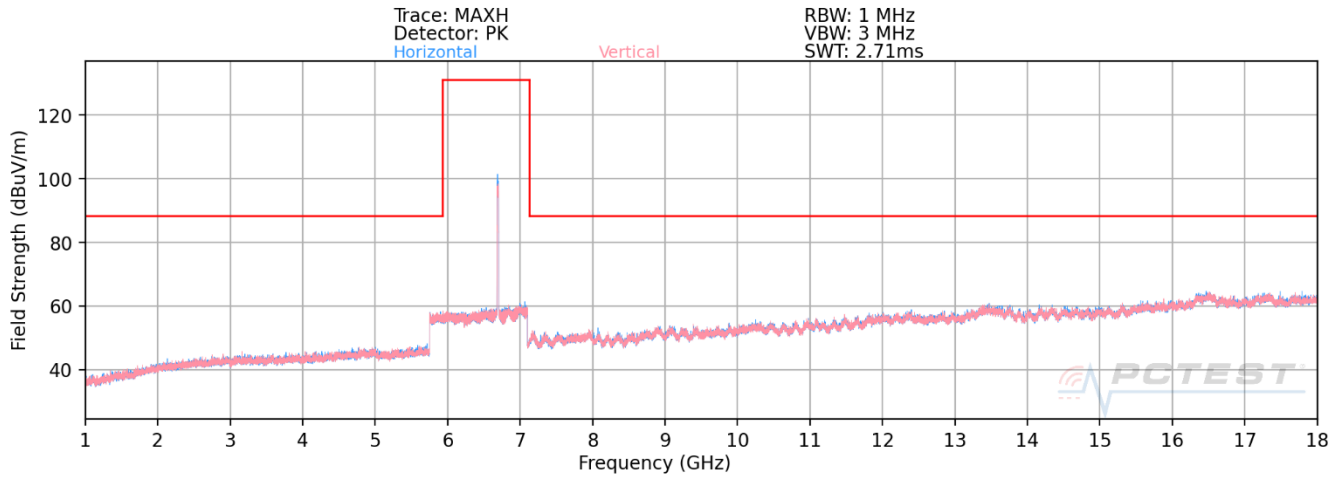

Plot 7-400. Radiated Spurious Plot above 1GHz MIMO (802.11ax)

| | | | |
|---|--|---|---|
| FCC ID: A3LSMG998B |  Proud to be part of  | MEASUREMENT REPORT (CERTIFICATION) |  Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 254 of 276 |

MIMO (242 Tones) Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5935MHz
 Channel: 2

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11870.00 | Average | V | - | - | -81.36 | 13.46 | 0.00 | 39.10 | 53.98 | -14.88 |
| * 11870.00 | Peak | V | - | - | -70.12 | 13.46 | 0.00 | 50.34 | 73.98 | -23.64 |
| * 17805.00 | Average | V | - | - | -81.89 | 22.05 | 0.00 | 47.16 | 53.98 | -6.82 |
| * 17805.00 | Peak | V | - | - | -70.50 | 22.05 | 0.00 | 58.55 | 73.98 | -15.43 |
| * 23740.00 | Average | V | - | - | -63.69 | 2.52 | -9.54 | 36.29 | 53.98 | -17.69 |
| * 23740.00 | Peak | V | - | - | -51.08 | 2.52 | -9.54 | 48.90 | 73.98 | -25.08 |
| * 29675.00 | Peak | V | - | - | -50.70 | 3.77 | -9.54 | 50.53 | 68.20 | -17.67 |

Table 7-46. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 12350.00 | Average | V | - | - | -81.57 | 12.54 | 0.00 | 37.97 | 53.98 | -16.01 |
| * 12350.00 | Peak | V | - | - | -70.31 | 12.54 | 0.00 | 49.23 | 73.98 | -24.75 |
| * 18525.00 | Average | V | - | - | -63.84 | -0.07 | -9.54 | 33.55 | 53.98 | -20.43 |
| * 18525.00 | Peak | V | - | - | -50.52 | -0.07 | -9.54 | 46.87 | 73.98 | -27.11 |
| 24700.00 | Peak | V | - | - | -50.92 | 3.04 | -9.54 | 49.58 | 68.20 | -18.62 |
| 30875.00 | Peak | V | - | - | -50.98 | 4.26 | -9.54 | 50.73 | 68.20 | -17.47 |

Table 7-47. Radiated Measurements MIMO (242 Tones)

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 255 of 276 |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 12830.00 | Peak | V | - | - | -69.71 | 13.23 | 0.00 | 50.52 | 68.20 | -17.68 |
| * 19245.00 | Average | V | - | - | -63.41 | 0.82 | -9.54 | 34.87 | 53.98 | -19.11 |
| * 19245.00 | Peak | V | - | - | -51.26 | 0.82 | -9.54 | 47.02 | 73.98 | -26.96 |
| 25660.00 | Peak | V | - | - | -49.89 | 4.39 | -9.54 | 51.96 | 68.20 | -16.24 |
| 32075.00 | Peak | V | - | - | -50.46 | 5.38 | -9.54 | 52.38 | 68.20 | -15.82 |

Table 7-48. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 12870.00 | Peak | V | - | - | -68.97 | 13.44 | 0.00 | 51.47 | 68.20 | -16.73 |
| * 19305.00 | Average | V | - | - | -63.23 | 0.70 | -9.54 | 34.92 | 53.98 | -19.05 |
| * 19305.00 | Peak | V | - | - | -51.83 | 0.70 | -9.54 | 46.32 | 73.98 | -27.65 |
| 25740.00 | Peak | V | - | - | -50.78 | 4.23 | -9.54 | 50.91 | 68.20 | -17.29 |
| 32175.00 | Peak | V | - | - | -51.32 | 5.13 | -9.54 | 51.27 | 68.20 | -16.93 |

Table 7-49. Radiated Measurements MIMO (242 Tones)

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 256 of 276 | |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 12950.00 | Peak | V | - | - | -69.65 | 13.25 | 0.00 | 50.60 | 68.20 | -17.60 |
| * 19425.00 | Average | V | - | - | -62.81 | 0.76 | -9.54 | 35.41 | 53.98 | -18.57 |
| * 19425.00 | Peak | V | - | - | -50.94 | 0.76 | -9.54 | 47.28 | 73.98 | -26.70 |
| 25900.00 | Peak | V | - | - | -51.65 | 4.37 | -9.54 | 50.18 | 68.20 | -18.02 |
| 32375.00 | Peak | V | - | - | -50.14 | 5.10 | -9.54 | 52.41 | 68.20 | -15.79 |

Table 7-50. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 13030.00 | Peak | V | - | - | -69.18 | 14.68 | 0.00 | 52.50 | 68.20 | -15.70 |
| * 19545.00 | Average | V | - | - | -63.57 | 0.88 | -9.54 | 34.77 | 53.98 | -19.21 |
| * 19545.00 | Peak | V | - | - | -51.43 | 0.88 | -9.54 | 46.91 | 73.98 | -27.07 |
| 26060.00 | Peak | V | - | - | -50.96 | 4.61 | -9.54 | 51.10 | 68.20 | -17.10 |
| 32575.00 | Peak | V | - | - | -51.18 | 5.09 | -9.54 | 51.37 | 68.20 | -16.83 |

Table 7-51. Radiated Measurements MIMO (242 Tones)

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 257 of 276 | |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 13070.00 | Peak | H | - | - | -70.25 | 13.85 | 0.00 | 50.60 | 68.20 | -17.60 |
| * 19605.00 | Average | H | - | - | -63.47 | 0.98 | -9.54 | 34.97 | 73.98 | -39.01 |
| * 19605.00 | Peak | H | - | - | -51.07 | 0.98 | -9.54 | 47.37 | 68.20 | -20.83 |
| 26140.00 | Peak | H | - | - | -52.14 | 4.49 | -9.54 | 49.81 | 68.20 | -18.39 |
| 32675.00 | Peak | H | - | - | -50.98 | 4.88 | -9.54 | 51.36 | 68.20 | -16.84 |

Table 7-52. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 13390.00 | Average | H | - | - | -81.65 | 14.01 | 0.00 | 39.36 | 53.98 | -14.62 |
| * 13390.00 | Peak | H | - | - | -69.97 | 14.01 | 0.00 | 51.04 | 73.98 | -22.94 |
| * 20085.00 | Average | H | - | - | -62.56 | 0.94 | -9.54 | 35.83 | 53.98 | -18.15 |
| * 20085.00 | Peak | H | - | - | -50.61 | 0.94 | -9.54 | 47.78 | 73.98 | -26.20 |
| 26780.00 | Peak | H | - | - | -51.96 | 4.32 | -9.54 | 49.81 | 68.20 | -18.39 |
| 33475.00 | Peak | H | - | - | -51.19 | 5.85 | -9.54 | 52.12 | 68.20 | -16.08 |

Table 7-53. Radiated Measurements MIMO (242 Tones)

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 258 of 276 | |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 13750.00 | Peak | H | - | - | -69.94 | 15.75 | 0.00 | 52.81 | 68.20 | -15.39 |
| * 20625.00 | Average | H | - | - | -62.73 | 1.47 | -9.54 | 36.20 | 53.98 | -17.78 |
| * 20625.00 | Peak | H | - | - | -50.34 | 1.47 | -9.54 | 48.59 | 73.98 | -25.39 |
| 27500.00 | Peak | H | - | - | -51.24 | 3.49 | -9.54 | 49.71 | 68.20 | -18.49 |
| 34375.00 | Peak | H | - | - | -50.94 | 7.16 | -9.54 | 53.68 | 68.20 | -14.52 |

Table 7-54. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 13790.00 | Peak | H | - | - | -69.49 | 15.49 | 0.00 | 53.00 | 68.20 | -15.20 |
| * 20685.00 | Average | H | - | - | -62.38 | 1.38 | -9.54 | 36.46 | 53.98 | -17.52 |
| * 20685.00 | Peak | H | - | - | -51.21 | 1.38 | -9.54 | 47.63 | 73.98 | -26.35 |
| 27580.00 | Peak | H | - | - | -51.42 | 3.48 | -9.54 | 49.52 | 68.20 | -18.68 |
| 34475.00 | Peak | H | - | - | -50.34 | 7.52 | -9.54 | 54.64 | 68.20 | -13.56 |

Table 7-55. Radiated Measurements MIMO (242 Tones)

| | | | | |
|--|--|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  PCTEST Proud to be part of  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 259 of 276 |

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 13990.00 | Peak | H | - | - | -70.07 | 16.59 | 0.00 | 53.52 | 68.20 | -14.68 |
| * 20985.00 | Average | H | - | - | -63.14 | 1.88 | -9.54 | 36.20 | 53.98 | -17.78 |
| * 20985.00 | Peak | H | - | - | -51.63 | 1.88 | -9.54 | 47.71 | 73.98 | -26.27 |
| 27980.00 | Peak | H | - | - | -52.03 | 3.63 | -9.54 | 49.06 | 68.20 | -19.14 |
| 34975.00 | Peak | H | - | - | -51.82 | 8.01 | -9.54 | 53.65 | 68.20 | -14.55 |

Table 7-56. Radiated Measurements MIMO (242 Tones)


Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 14230.00 | Peak | H | - | - | -69.10 | 16.09 | 0.00 | 53.99 | 68.20 | -14.21 |
| * 21345.00 | Average | H | - | - | -62.37 | 1.90 | -9.54 | 36.99 | 53.98 | -16.99 |
| * 21345.00 | Peak | H | - | - | -51.28 | 1.90 | -9.54 | 48.08 | 73.98 | -25.90 |
| 28460.00 | Peak | H | - | - | -50.94 | 3.74 | -9.54 | 50.26 | 68.20 | -17.94 |
| 35575.00 | Peak | H | - | - | -51.29 | 3.74 | -9.54 | 49.91 | 68.20 | -18.29 |


Table 7-57. Radiated Measurements MIMO (242 Tones)

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 260 of 276 | |

MIMO Radiated Spurious Emissions Measurements (Above 18GHz)

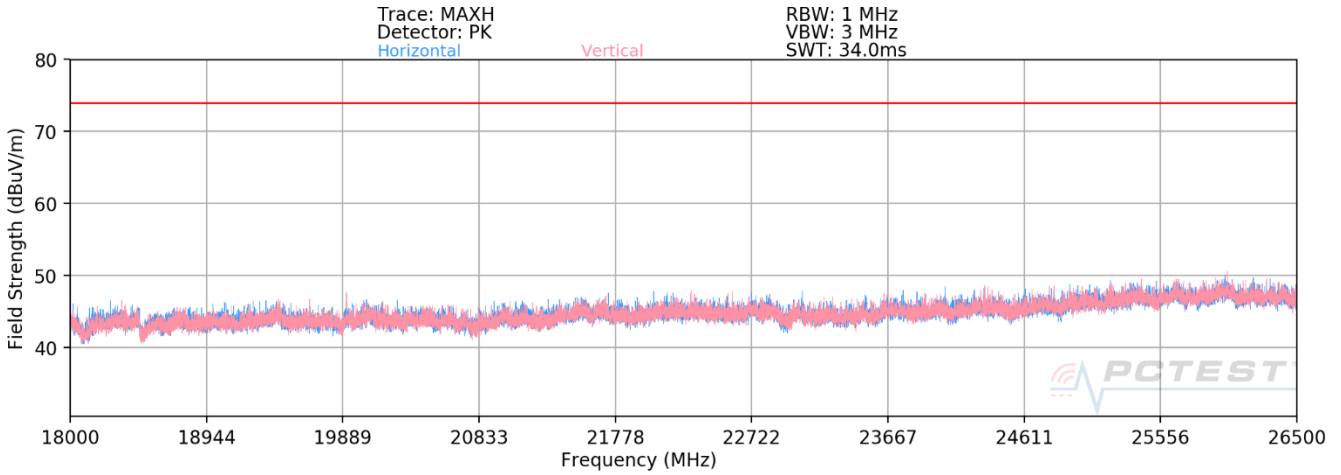

Plot 7-401. Radiated Spurious Plot above 18GHz - 26.5GHz MIMO (802.11ax)

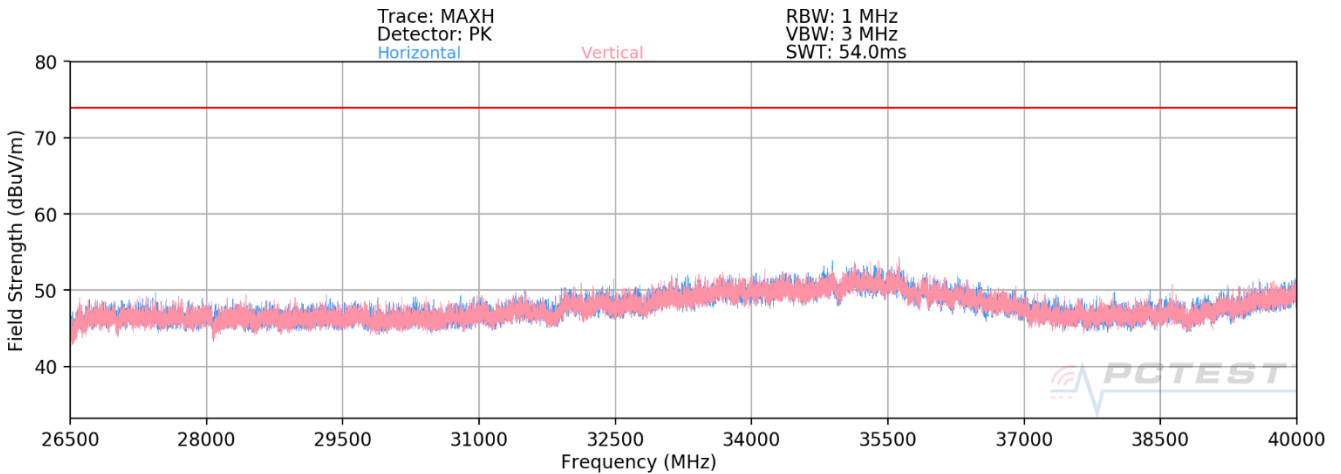


Plot 7-402. Radiated Spurious Plot 26.5GHz - 40GHz MIMO (802.11ax)

| | | | |
|---|--|---|---|
| FCC ID: A3LSMG998B |  Proud to be part of  | MEASUREMENT REPORT (CERTIFICATION) |  Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 261 of 276 |


6.6.3 MIMO Radiated Band Edge Measurements (20MHz BW) §15.407(b.5) §15.205 §15.209

106 Tones

| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11ax |
| Worst Case Transfer Rate: | MCS0 |
| RU Index | 54 |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 5935MHz |
| Channel: | 2 |

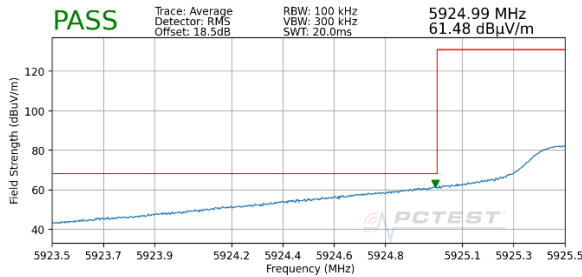


Plot 7-403. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

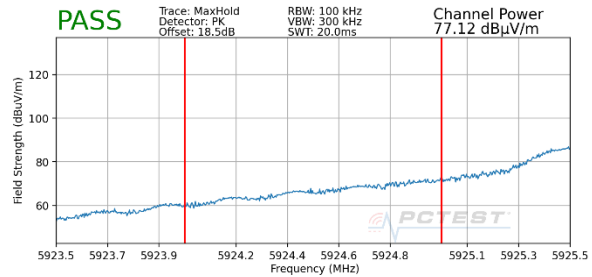


Plot 7-404. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11ax |
| Worst Case Transfer Rate: | MCS0 |
| RU Index | 54 |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 7115MHz |
| Channel: | 233 |

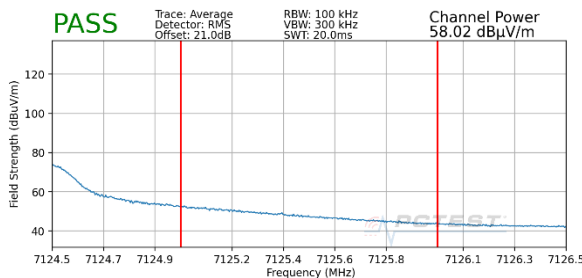

Plot 7-405. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

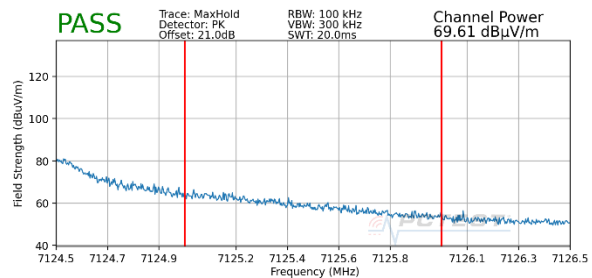


Plot 7-406. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)


| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 262 of 276 |

242 Tones

| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11ax |
| Worst Case Transfer Rate: | MCS0 |
| RU Index | 61 |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 5935MHz |
| Channel: | 2 |

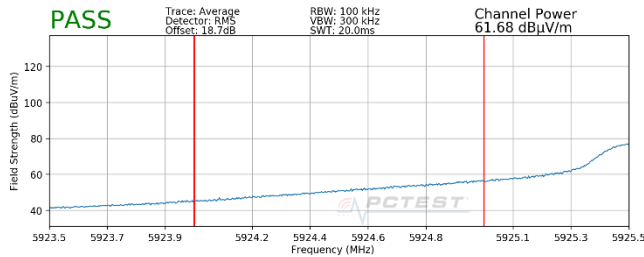


Plot 7-407. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

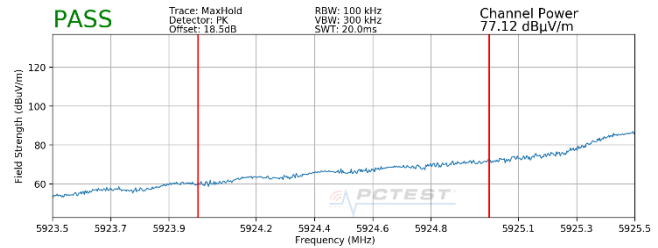


Plot 7-408. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11ax |
| Worst Case Transfer Rate: | MCS0 |
| RU Index | 61 |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 7115MHz |
| Channel: | 233 |

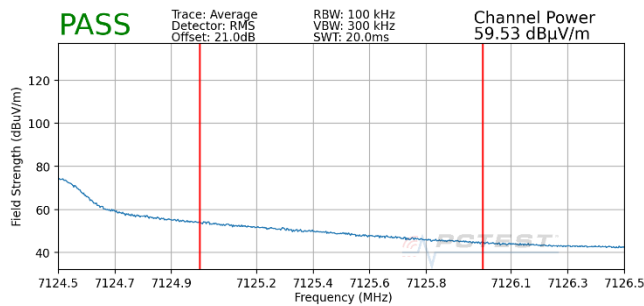

Plot 7-409. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

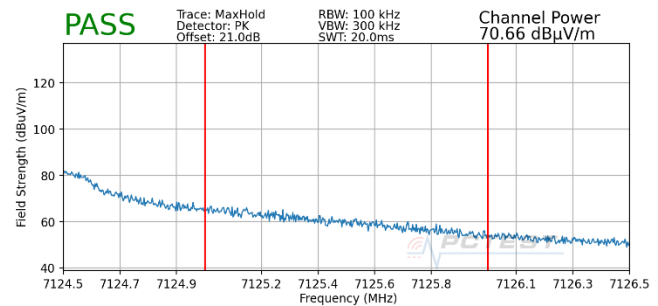


Plot 7-410. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 263 of 276 |


6.6.4 MIMO Radiated Band Edge Measurements (40MHz BW) §15.407(b.5) §15.205 §15.209

| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11ax |
| Worst Case Transfer Rate: | MCS0 |
| RU Index | 65 |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 5965MHz |
| Channel: | 3 |

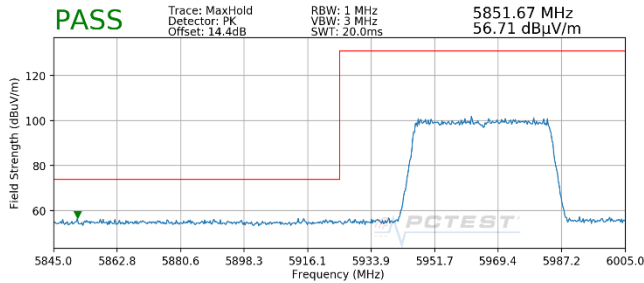

Plot 7-411. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5)

| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11ax |
| Worst Case Transfer Rate: | MCS0 |
| RU Index | 65 |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 7085MHz |
| Channel: | 227 |

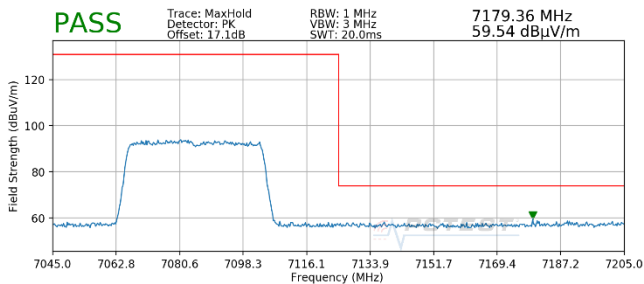


Plot 7-412. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8)

| | | | | |
|--|--|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  PCTEST® Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 264 of 276 |


6.6.5 MIMO Radiated Band Edge Measurements (80MHz BW) §15.407(b.5) §15.205 §15.209

| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11ax |
| Worst Case Transfer Rate: | MCS0 |
| RU Index | 67 |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 5985MHz |
| Channel: | 7 |

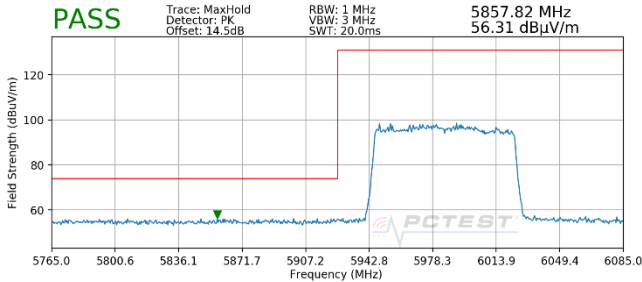

**Plot 7-413. Radiated Lower Band Edge Plot MIMO
(Peak – UNII Band 5)**

| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11ax |
| Worst Case Transfer Rate: | MCS0 |
| RU Index | 67 |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 7025MHz |
| Channel: | 215 |

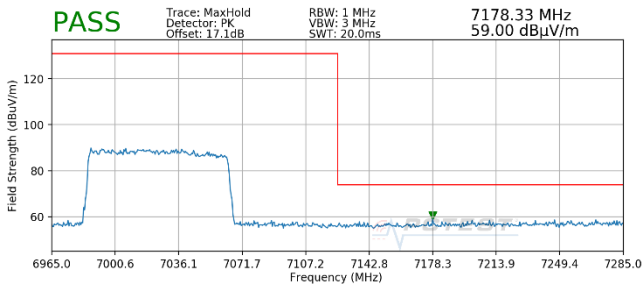

**Plot 7-414. Radiated Upper Band Edge Plot MIMO
(Peak – UNII Band 8)**

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 265 of 276 |

7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-65 per Section 15.209.

| Frequency | Field Strength [$\mu\text{V/m}$] | Measured Distance [Meters] |
|-------------------|---------------------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz) | 300 |
| 0.490 – 1.705 MHz | 24000/F (kHz) | 30 |
| 1.705 – 30.00 MHz | 30 | 30 |
| 30.00 – 88.00 MHz | 100 | 3 |
| 88.00 – 216.0 MHz | 150 | 3 |
| 216.0 – 960.0 MHz | 200 | 3 |
| Above 960.0 MHz | 500 | 3 |

Table 7-58. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

| | | | | |
|--|--|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  PCTEST Proud to be part of  element | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 266 of 276 |

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

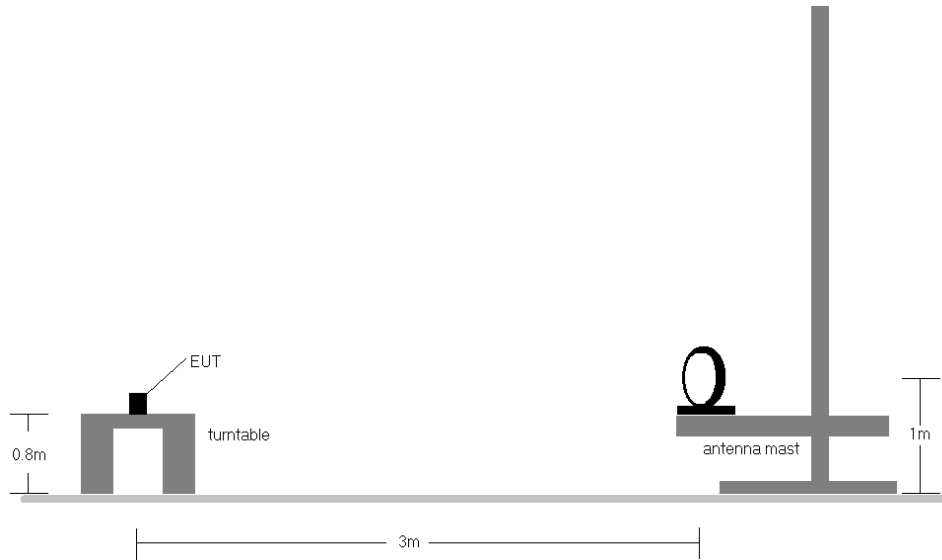


Figure 7-7. Radiated Test Setup < 30MHz

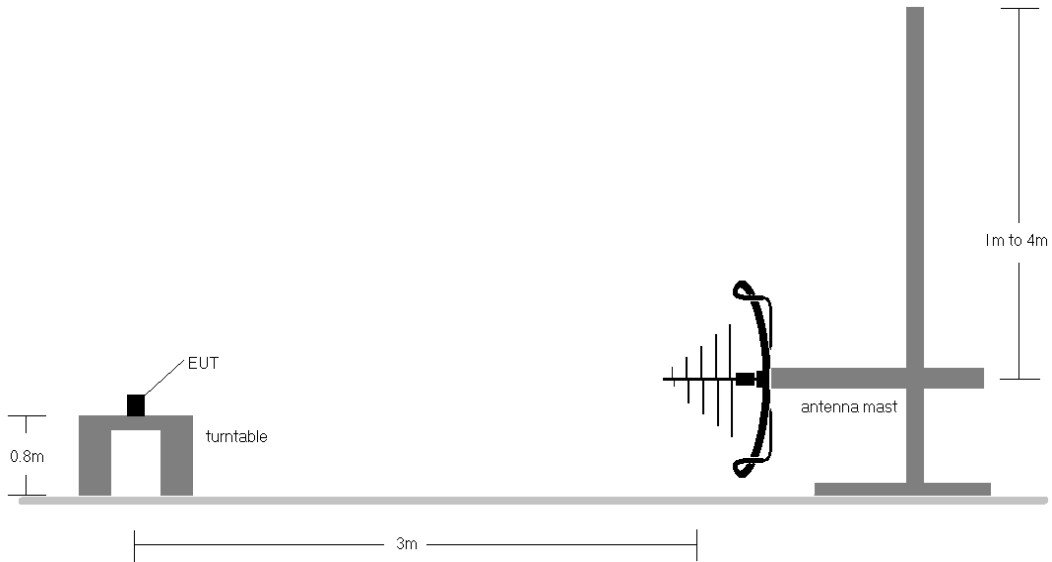


Figure 7-8. Radiated Test Setup < 1GHz


| | | | |
|--|--|---|---|
| <p>FCC ID: A3LSMG998B</p> |  Proud to be part of  | <p>MEASUREMENT REPORT (CERTIFICATION)</p>  | <p>Approved by: Technical Manager</p> |
| <p>Test Report S/N: 1M2009230154-27-R1.A3L</p> | <p>Test Dates: 9/28/2020-12/14/2020</p> | <p>EUT Type: Portable Handset</p> | <p>Page 267 of 276</p> |

Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-65.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

| | | | | |
|---|--|---|---|--|
| FCC ID: A3LSMG998B |  Proud to be part of  element | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 268 of 276 | |

Radiated Spurious Emissions Measurements (Below 1GHz)
§15.209

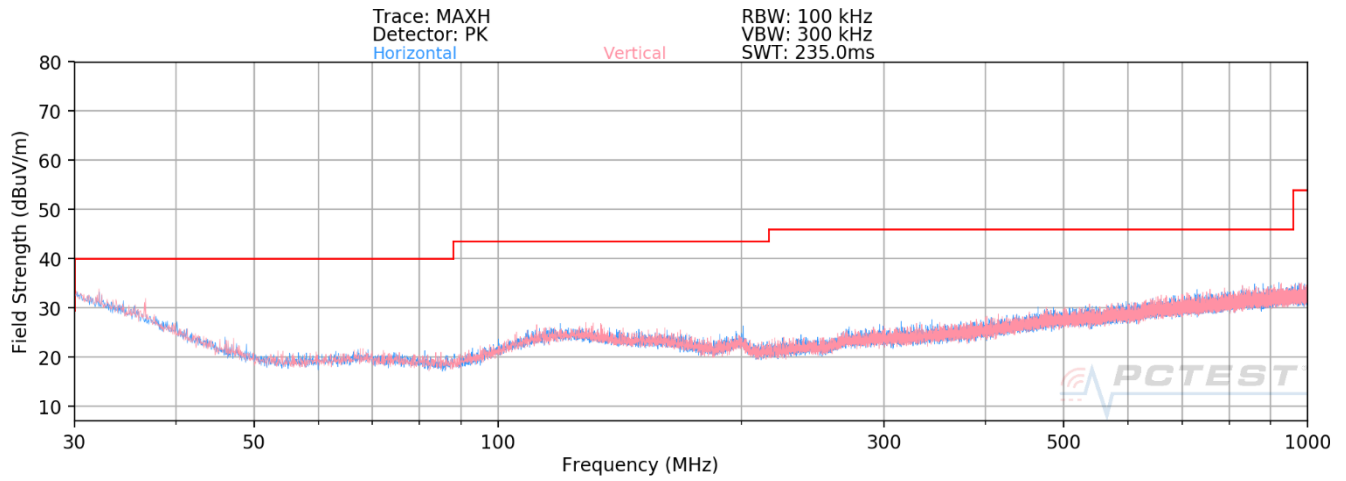

Plot 7-415. Radiated Spurious Plot below 1GHz

| | | | |
|---|---|---|---|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 269 of 276 |

7.9 Line-Conducted Test Data

§15.407

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

| Frequency of emission (MHz) | Conducted Limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 – 0.5 | 66 to 56* | 56 to 46* |
| 0.5 – 5 | 56 | 46 |
| 5 – 30 | 60 | 50 |

Table 7-59. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

| | | | | |
|--|---|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 270 of 276 |

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


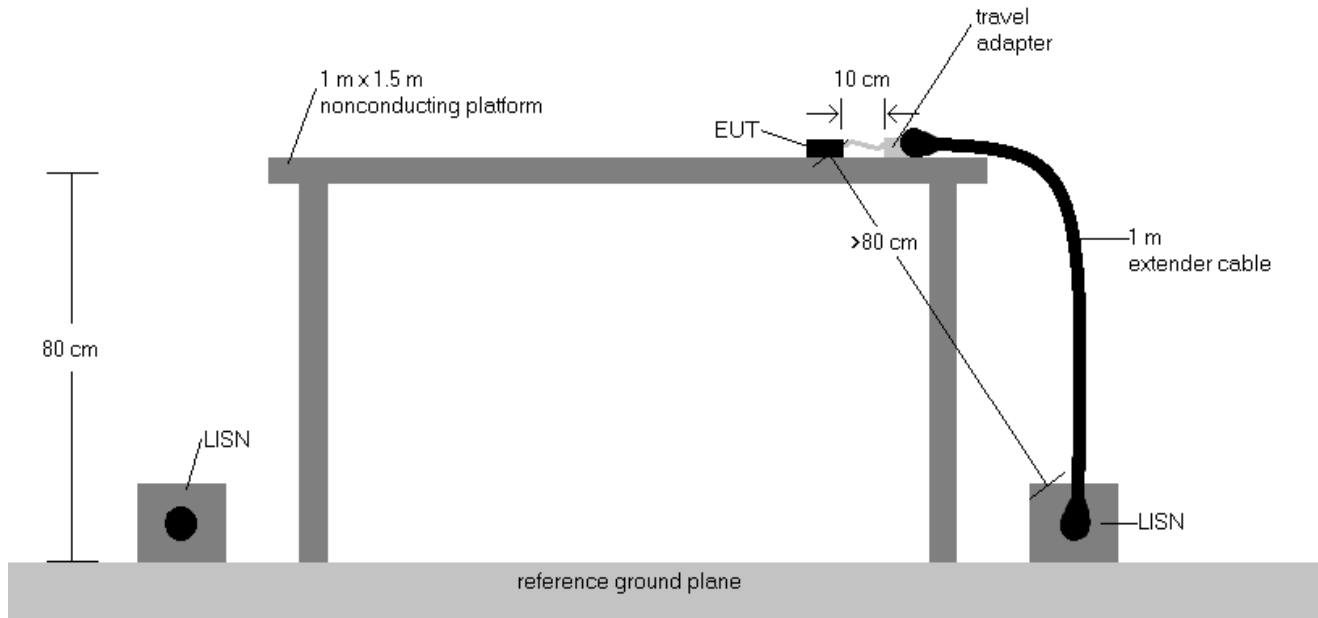


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
3. $Corr. (dB) = Cable\ loss (dB) + LISN\ insertion\ factor (dB)$
4. $QP/AV\ Level (dB\mu V) = QP/AV\ Analyzer/Receiver\ Level (dB\mu V) + Corr. (dB)$
5. $Margin (dB) = QP/AV\ Limit (dB\mu V) - QP/AV\ Level (dB\mu V)$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

| | | | | |
|--|--|---------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMG998B |  PCTEST Proud to be part of  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 271 of 276 |

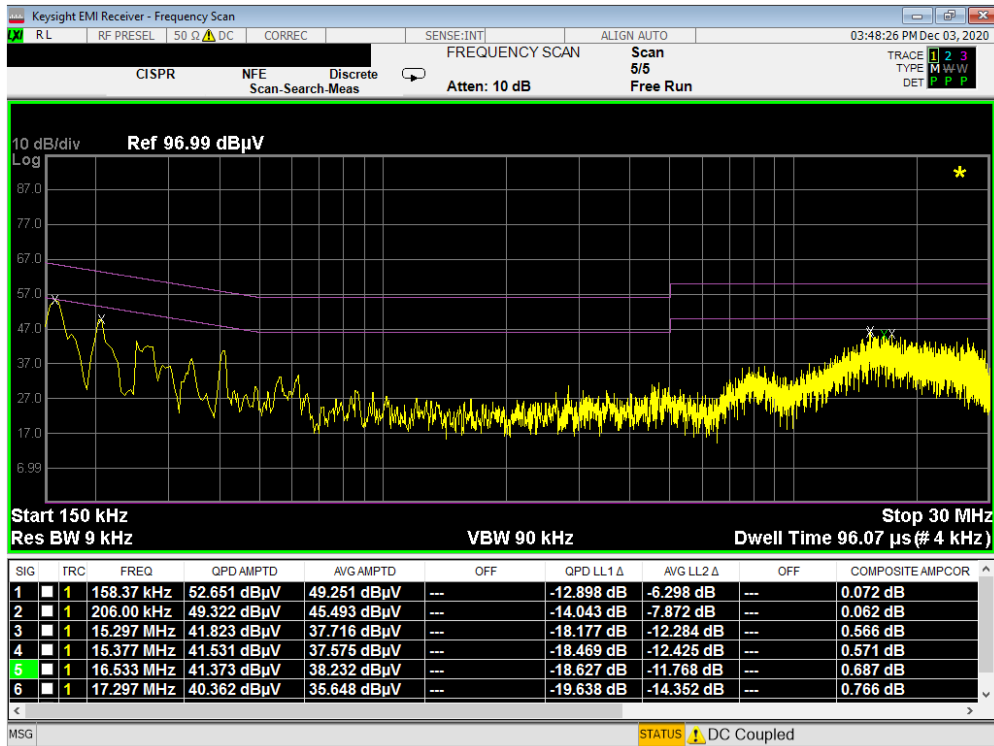


Plot 7-416. Line Conducted Plot with 802.11ax UNII Band 5 (L1)

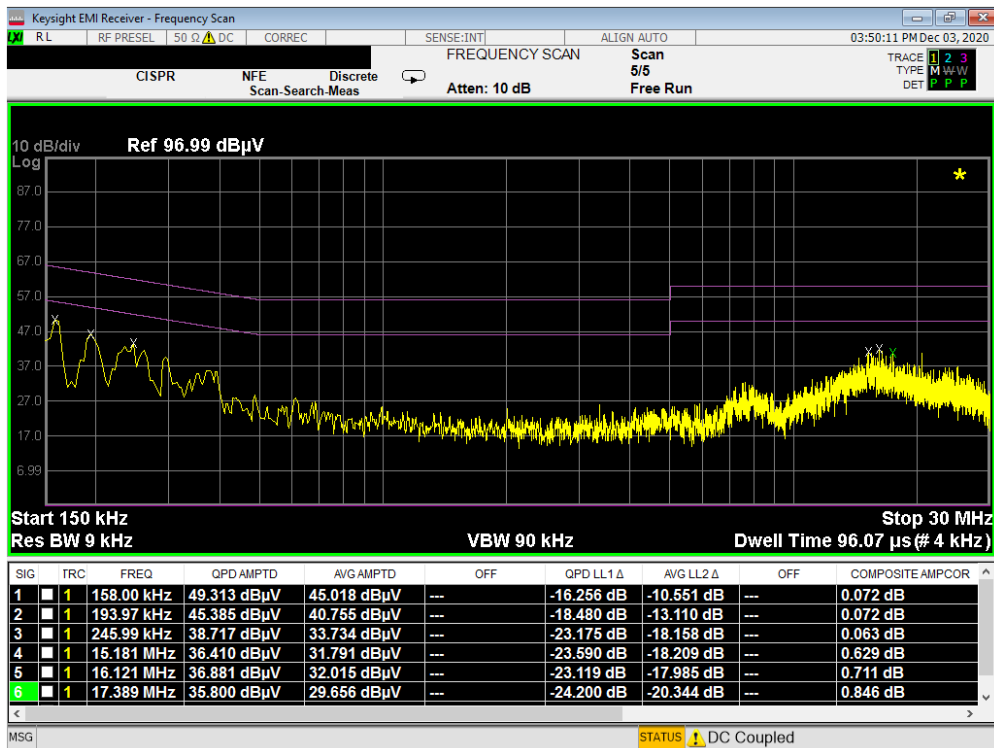


Plot 7-417. Line Conducted Plot with 802.11ax UNII Band 5 (N)

| | | | | |
|--|--|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 272 of 276 |

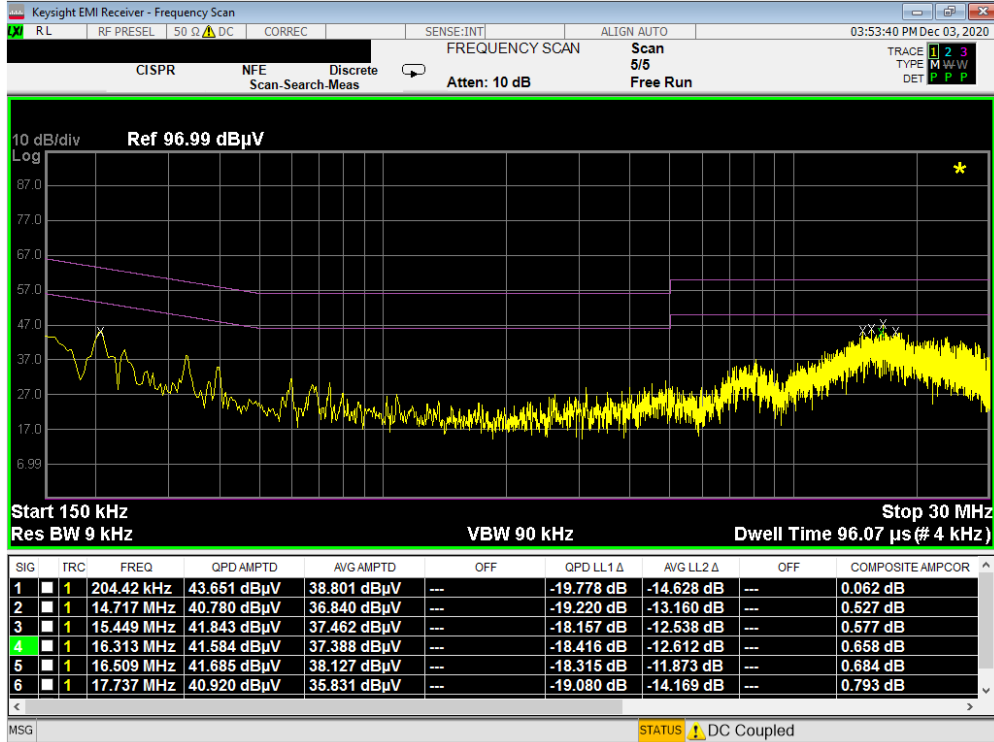


Plot 7-418. Line Conducted Plot with 802.11ax UNII Band 6 (L1)

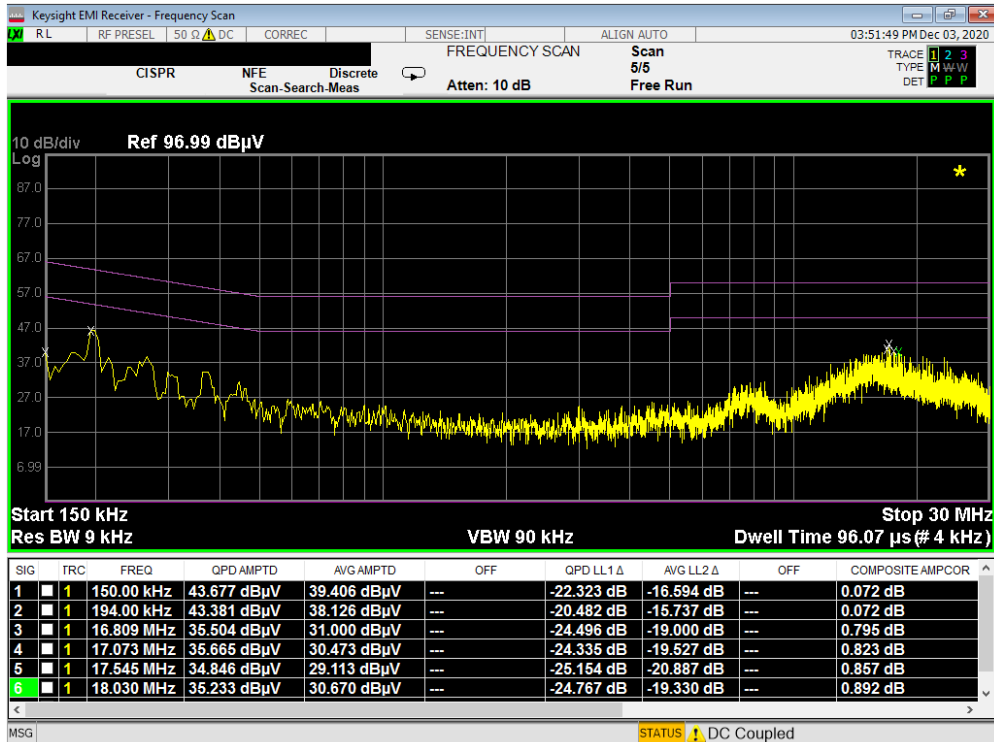


Plot 7-419. Line Conducted Plot with 802.11ax UNII Band 6 (N)

| | | | | |
|--|--|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 273 of 276 |

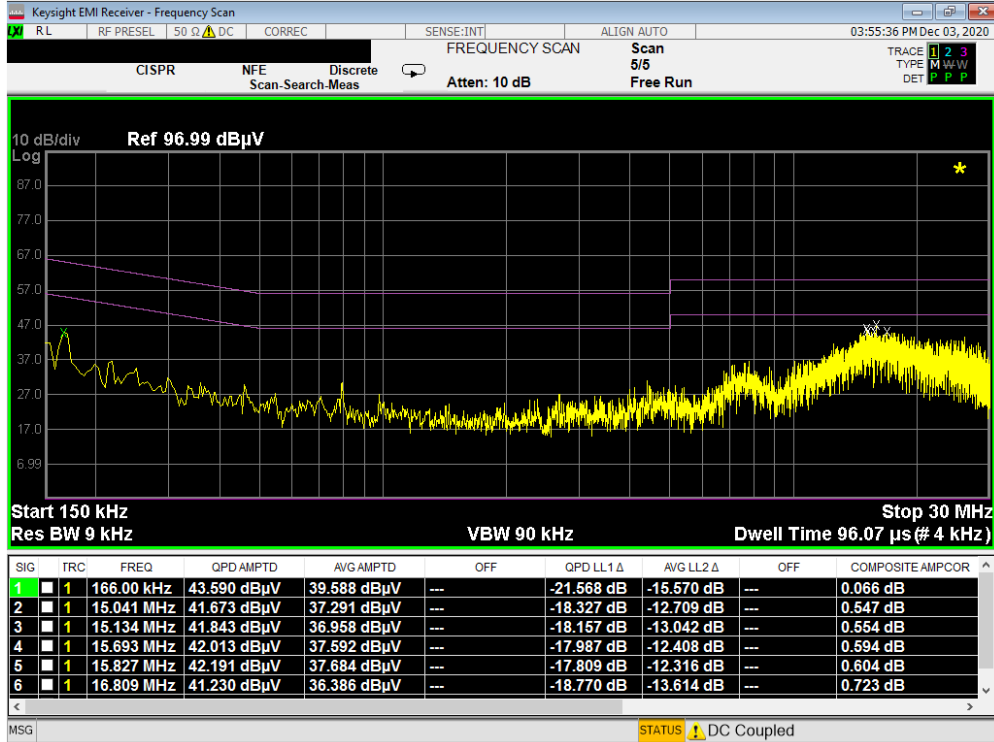


Plot 7-420. Line Conducted Plot with 802.11ax UNII Band 7 (L1)

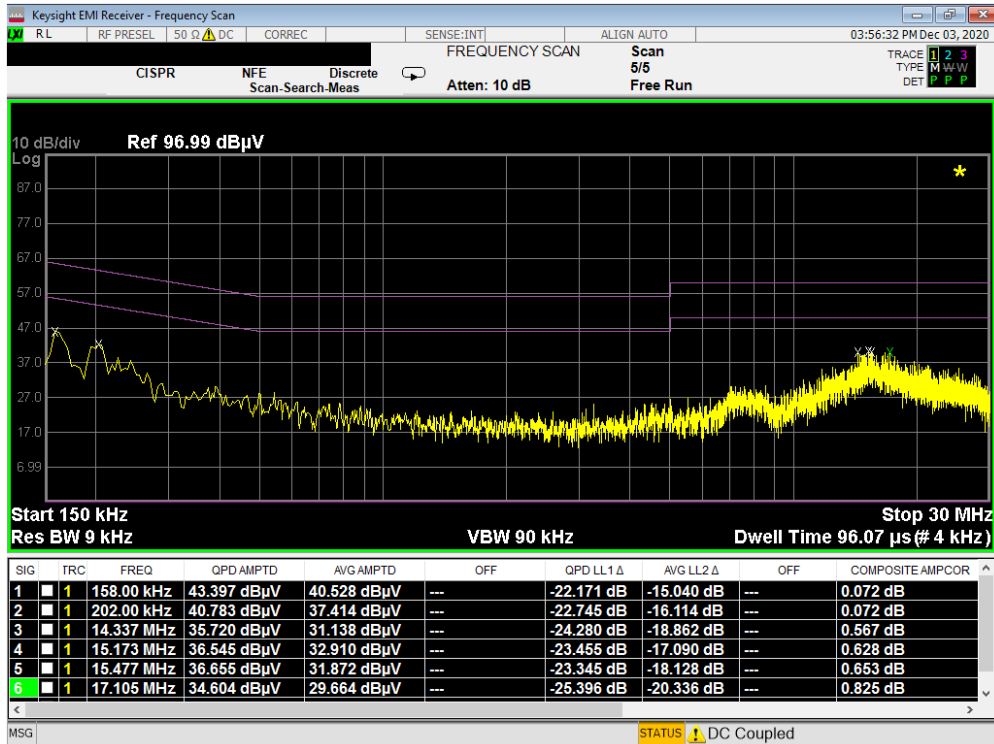


Plot 7-421. Line Conducted Plot with 802.11ax UNII Band 7 (N)

| | | | | |
|--|--|---------------------------------------|----------------|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | SAMSUNG | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 274 of 276 |

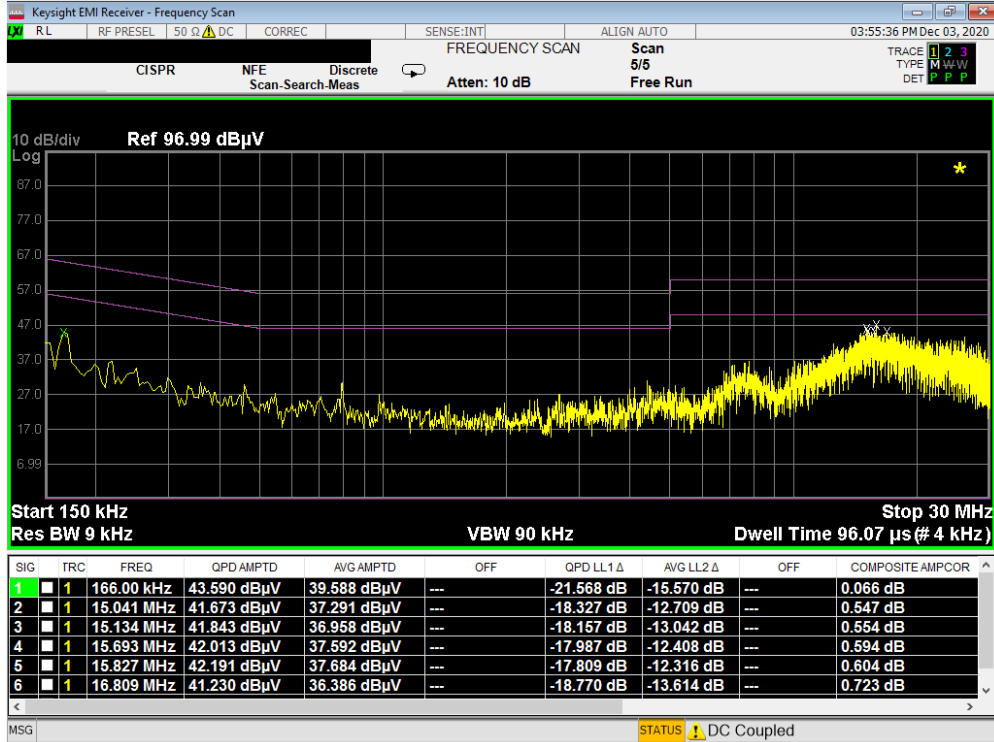

Plot 7-422. Line Conducted Plot with 802.11ax UNII Band 8 (L1)

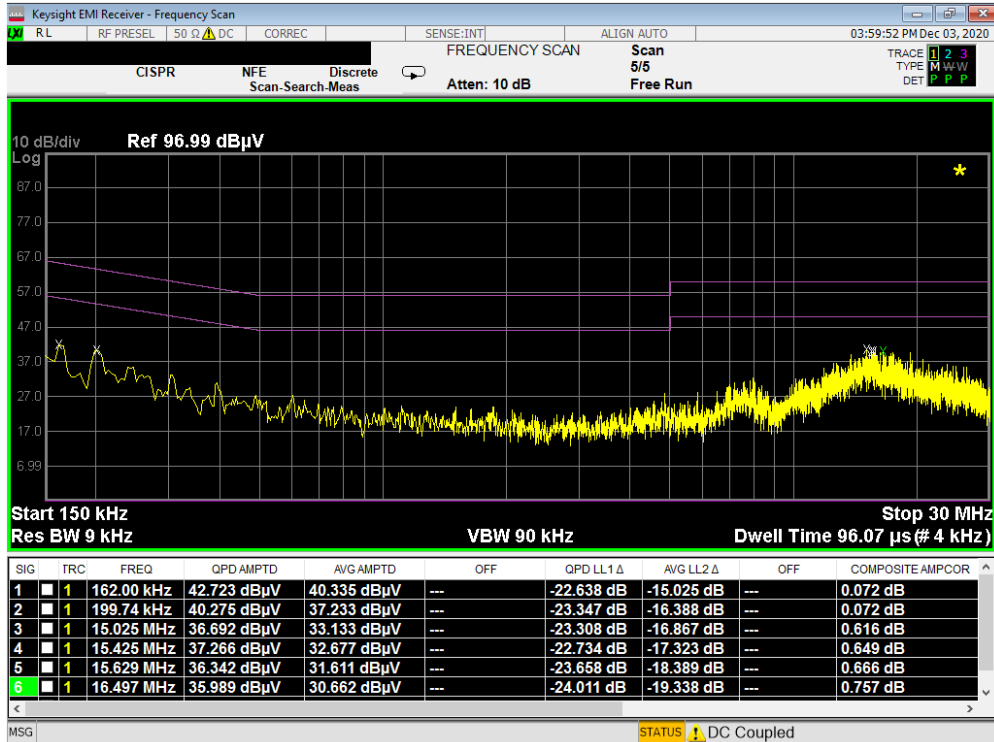

Plot 7-423. Line Conducted Plot with 802.11ax UNII Band 8 (N)

| | | | | |
|--|--|---------------------------------------|--|-----------------------------------|
| FCC ID: A3LSMG998B | PCTEST Proud to be part of element | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | | Page 275 of 276 |

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMG998B** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

| | | | | |
|---|--|---|---|--|
| FCC ID: A3LSMG998B |  Proud to be part of  element | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Technical Manager |
| Test Report S/N: 1M2009230154-27-R1.A3L | Test Dates: 9/28/2020-12/14/2020 | EUT Type: Portable Handset | Page 276 of 276 | |