

## PART 24 MEASUREMENT REPORT

**Applicant Name:**  
 Samsung Electronics Co., Ltd.  
 129, Samsung-ro,  
 Yeongtong-gu, Suwon-si  
 Gyeonggi-do, 16677, Korea


**Date of Testing:**  
 1/16/2021 - 1/21/2021  
**Test Site/Location:**  
 PCTEST Lab. Columbia, MD, USA  
**Test Report Serial No.:**  
 1M2101110003-03.A3L

<b>FCC ID:</b>	<b>A3LSMG998JPN</b>
<b>Applicant Name:</b>	<b>Samsung Electronics Co., Ltd.</b>



**Application Type:** Certification  
**Model:** SC-52B  
**EUT Type:** Portable Handset  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part:** 24  
**Test Procedure(s):** ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



  
 Randy Ortanez  
 President




<b>FCC ID:</b> A3LSMG998JPN	 <b>PART 24 MEASUREMENT REPORT</b> 	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2101110003-03.A3L	<b>Test Dates:</b> 1/16/2021 - 1/21/2021	<b>EUT Type:</b> Portable Handset
		Page 1 of 36


## TABLE OF CONTENTS

1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration .....	5
2.4	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	PCS - Base Frequency Blocks .....	6
3.3	PCS - Mobile Frequency Blocks.....	6
3.4	Radiated Power and Radiated Spurious Emissions .....	7
4.0	MEASUREMENT UNCERTAINTY .....	8
5.0	TEST EQUIPMENT CALIBRATION DATA .....	9
6.0	SAMPLE CALCULATIONS .....	10
7.0	TEST RESULTS .....	11
7.1	Summary .....	11
7.2	Occupied Bandwidth .....	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	14
7.4	Band Edge Emissions at Antenna Terminal .....	20
7.5	Peak-Average Ratio .....	23
7.6	Radiated Power (ERP/EIRP).....	25
7.7	Radiated Spurious Emissions Measurements.....	28
7.8	Frequency Stability / Temperature Variation .....	33
8.0	CONCLUSION.....	36



<b>FCC ID:</b> A3LSMG998JPN	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>PART 24 MEASUREMENT REPORT</b>	 <b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2101110003-03.A3L	<b>Test Dates:</b> 1/16/2021 - 1/21/2021	<b>EUT Type:</b> Portable Handset	Page 2 of 36



## PART 24 MEASUREMENT REPORT



Mode	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
			Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	GMSK	1850.2 - 1909.8	0.673	28.28	244KGXW
EDGE	8-PSK	1850.2 - 1909.8	0.333	25.23	237KG7W

FCC ID: A3LSMG998JPN	 PCTEST® Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 3 of 36

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMG998JPN	 <b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2101110003-03.A3L	<b>Test Dates:</b> 1/16/2021 - 1/21/2021	<b>EUT Type:</b> Portable Handset		Page 4 of 36

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID:A3LSMG998JPN**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

**Test Device Serial No.:** 0466M, 70681H

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB



### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMG998JPN	 <b>PART 24 MEASUREMENT REPORT</b> 		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2101110003-03.A3L	<b>Test Dates:</b> 1/16/2021 - 1/21/2021	<b>EUT Type:</b> Portable Handset	Page 5 of 36


## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure


The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.



Deviation from Measurement Procedure.....None
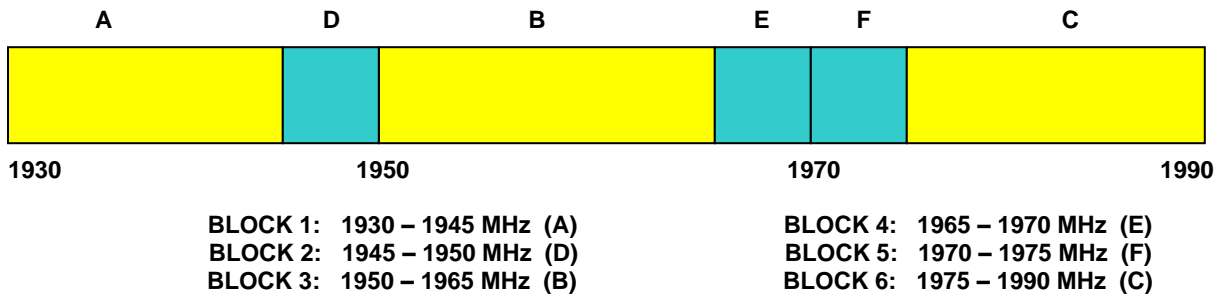
### 3.2 PCS - Base Frequency Blocks

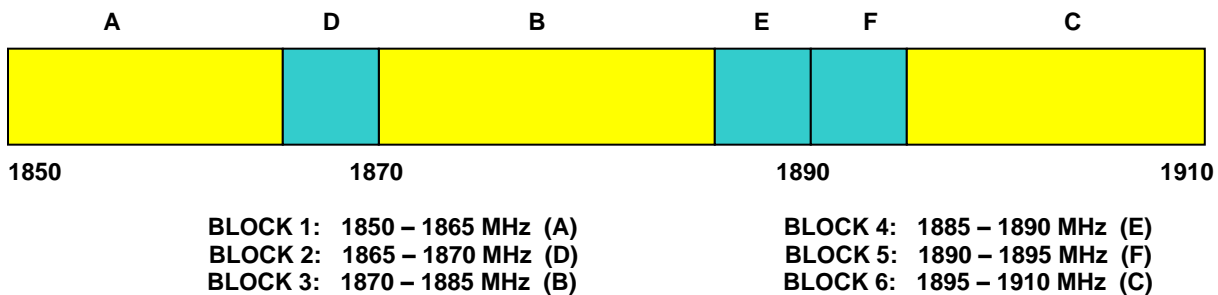

### 3.3 PCS - Mobile Frequency Blocks



FCC ID: A3LSMG998JPN	 <b>PART 24 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset	Page 6 of 36

### 3.4 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:



$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.



Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: A3LSMG998JPN	 <b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2101110003-03.A3L	<b>Test Dates:</b> 1/16/2021 - 1/21/2021	<b>EUT Type:</b> Portable Handset	Page 7 of 36	

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMG998JPN	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 8 of 36



## 5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx2	Licensed Transmitter Cable Set	4/9/2020	Annual	4/9/2021	LTx2
-	LTx4	Licensed Transmitter Cable Set	7/9/2020	Annual	7/9/2021	LTx4
-	LTx5	Licensed Transmitter Cable Set	4/9/2020	Annual	4/6/2021	LTx5
Agilent	N9020A	MXA Signal Analyzer	8/4/2020	Annual	8/4/2021	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	7/17/2020	Annual	7/17/2021	MY52350166
Agilent	E5515C	Wireless Communications Test Set	N/A			GB45360985
Agilent	E5515C	Wireless Communications Test Set	N/A			GB46310798
Anritsu	MT8820C	Radio Communication Analyzer	N/A			6201300731
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6200901190
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	128338
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307

**Table 5-1. Test Equipment**

### Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMG998JPN	 <b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2101110003-03.A3L	<b>Test Dates:</b> 1/16/2021 - 1/21/2021	<b>EUT Type:</b> Portable Handset	Page 9 of 36	

## 6.0 SAMPLE CALCULATIONS

### GSM Emission Designator

#### **Emission Designator = 250KGXW**

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

### EDGE Emission Designator

#### **Emission Designator = 250KG7W**

EDGE BW = 250 kHz

G = Phase Modulation



7 = Quantized/Digital Info

W = Combination (Audio/Data)

### Spurious Radiated Emission

#### **Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3700.40$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: A3LSMG998JPN	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 10 of 36

## 7.0 TEST RESULTS

### 7.1 Summary



Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMG998JPN  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): GSM/GPRS/EDGE

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	RSS-Gen(6.7)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	RSS-133(6.5)	> 43 + 10log10(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	RSS-133(4.1)	N/A	PASS	See RF Exposure Report
	Frequency Stability	2.1055, 24.235	RSS-133(6.3)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power	24.232(c)	RSS-132(5.4)	< 7 Watts max. ERP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 24.238(a)	RSS-133(6.5)	> 43 + 10 log10 (P[Watts]) for all out-of-band emissions	PASS	Section 7.7

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST 2G/3G Automation Version 4.5, LTE Automation Version 5.3.

FCC ID: A3LSMG998JPN	 <b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 11 of 36

## 7.2 Occupied Bandwidth

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

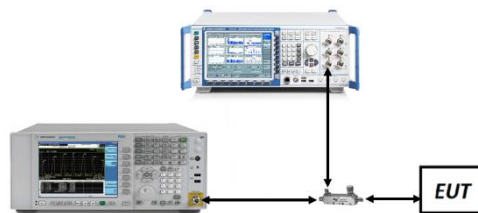


**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

None.

FCC ID: A3LSMG998JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 12 of 36

**GSM/GPRS PCS**

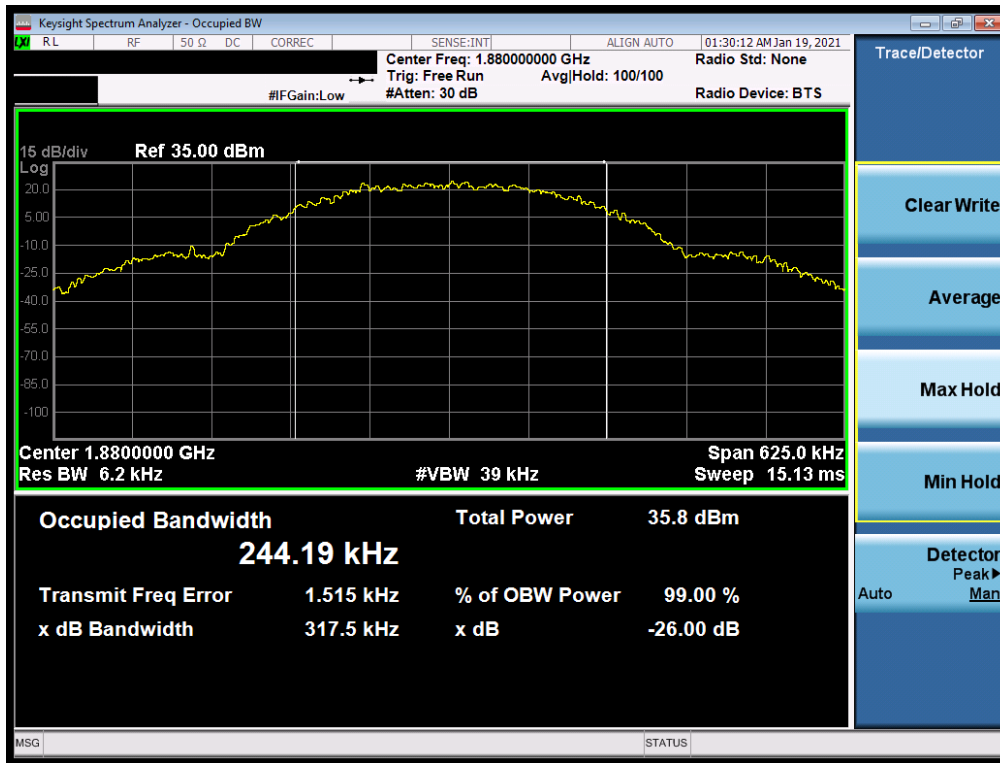

**Plot 7-1. Occupied Bandwidth Plot (GPRS, Ch. 661)**



**Plot 7-2. Occupied Bandwidth Plot (EDGE, Ch. 661)**

FCC ID: A3LSMG998JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset	Page 13 of 36

## 7.3 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup

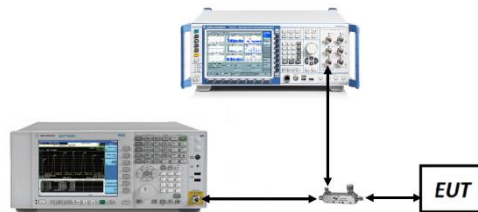

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-2. Test Instrument & Measurement Setup**

### Test Notes


Per Part 24 and RSS-133, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMG998JPN	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 14 of 36

**GSM/GPRS PCS**

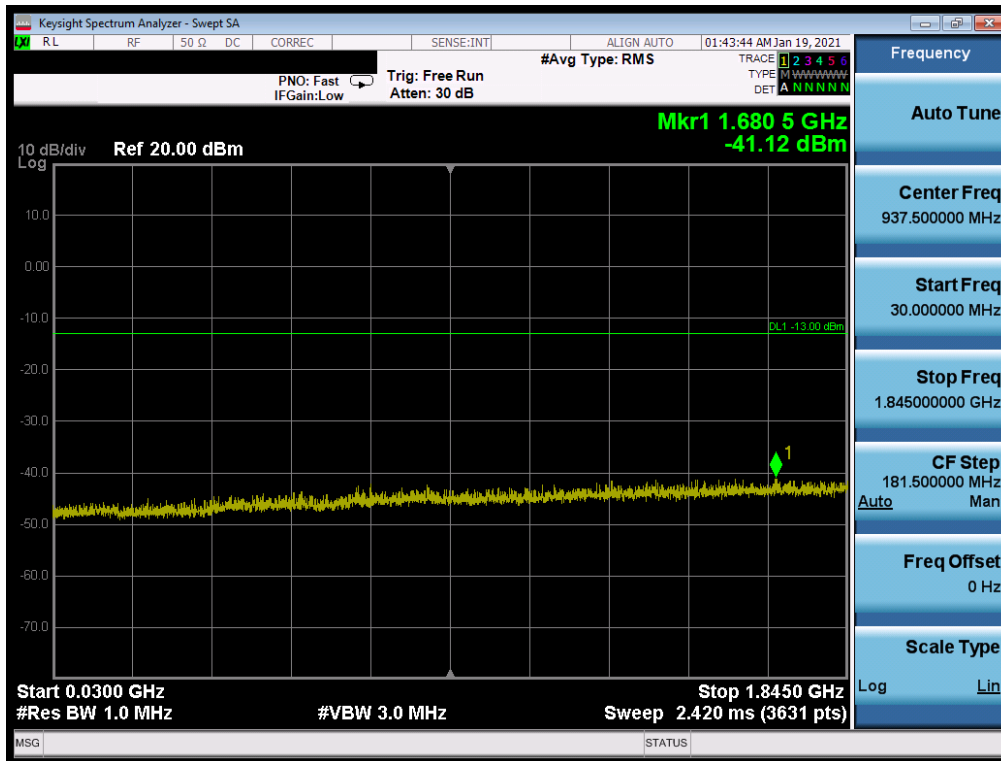


Plot 7-3. Conducted Spurious Plot (GPRS Ch. 512)

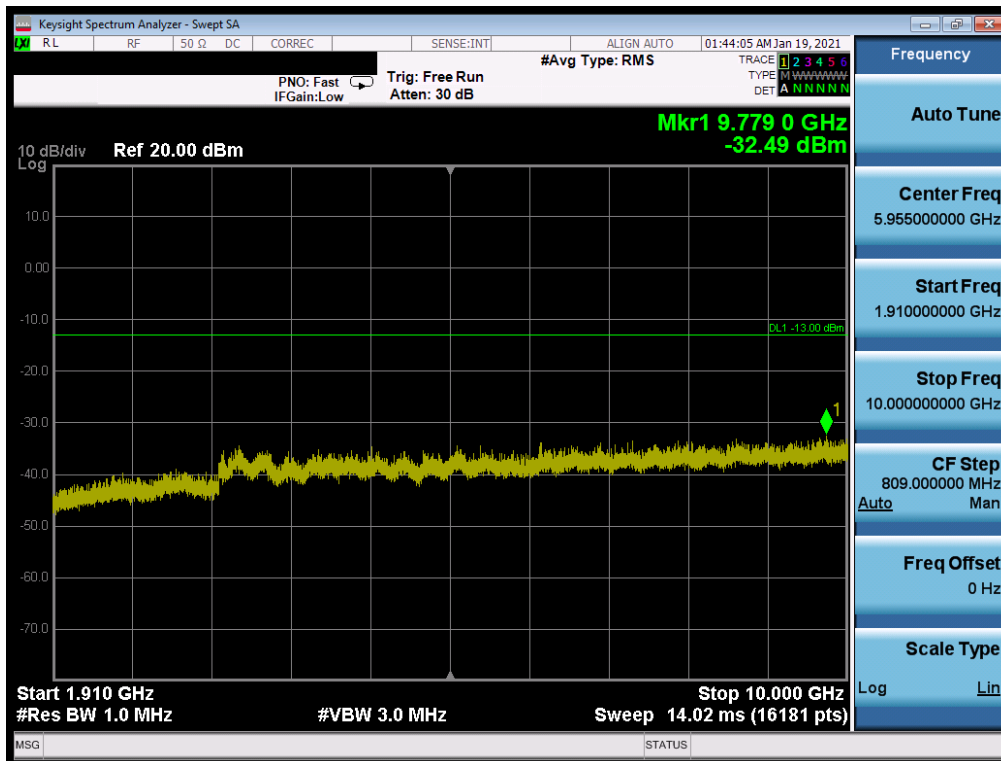


Plot 7-4. Conducted Spurious Plot (GPRS Ch. 512)

FCC ID: A3LSMG998JPN	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 15 of 36

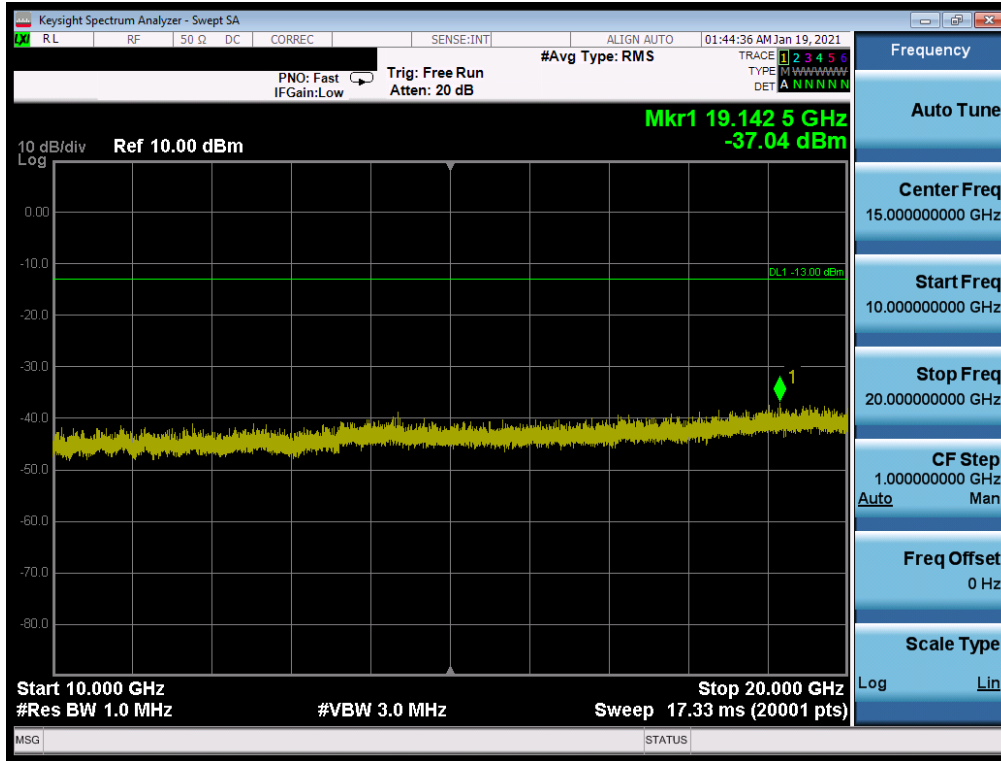

Plot 7-5. Conducted Spurious Plot (GPRS Ch. 512)

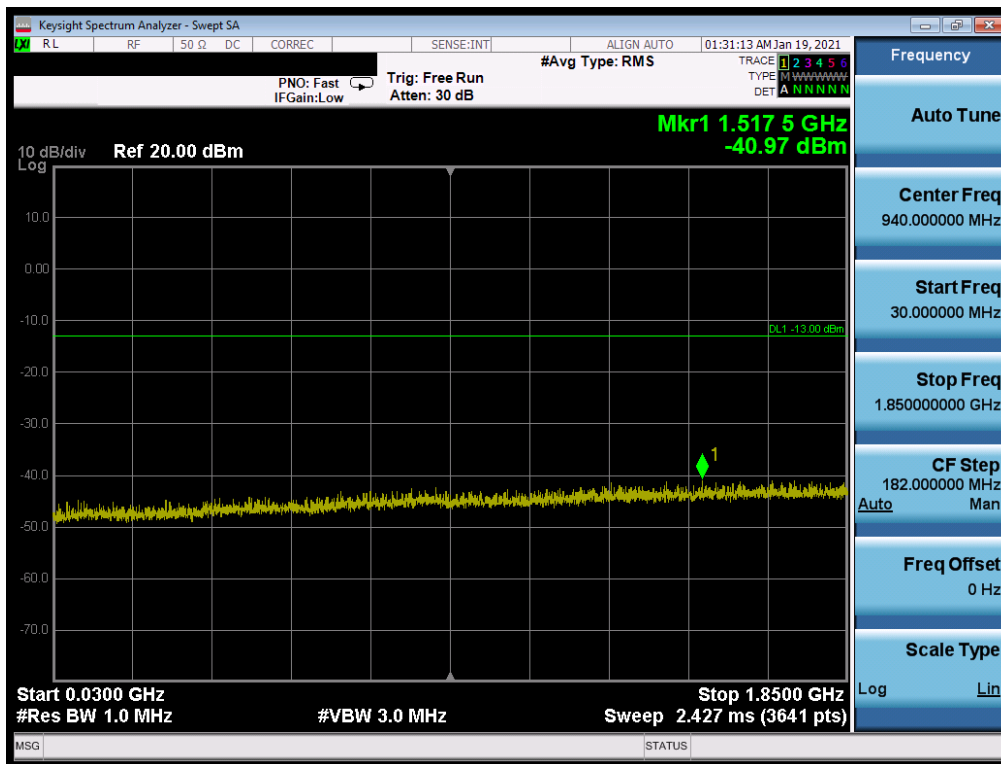


Plot 7-6. Conducted Spurious Plot (GPRS Ch. 661)


FCC ID: A3LSMG998JPN	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 16 of 36





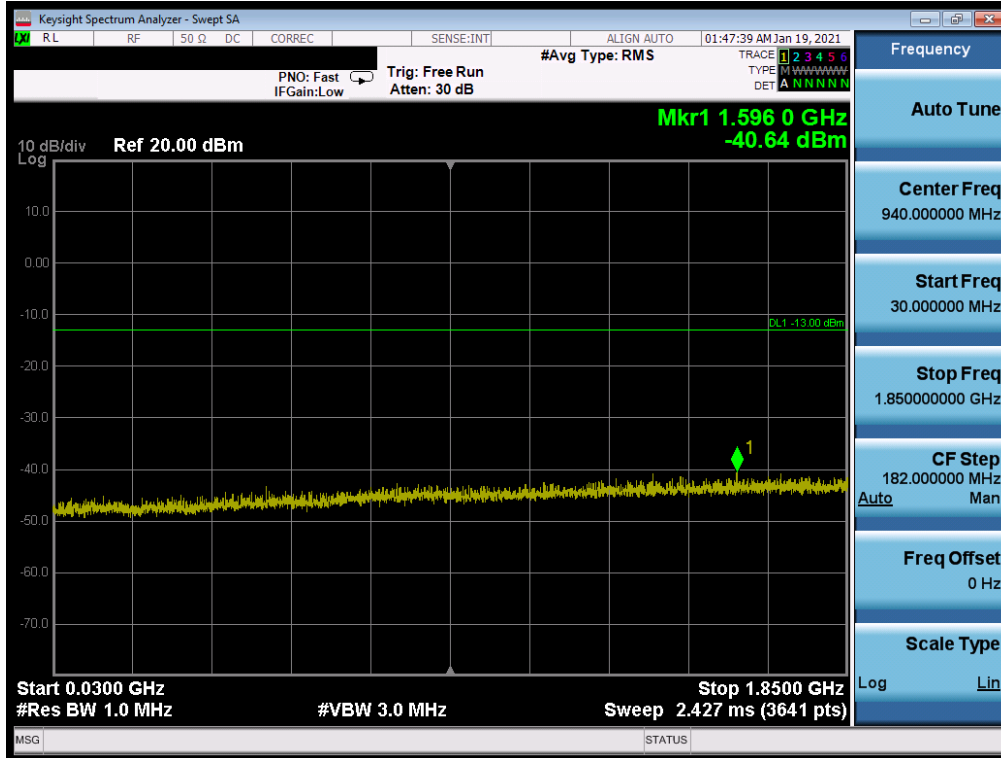


Plot 7-9. Conducted Spurious Plot (GPRS Ch. 810)

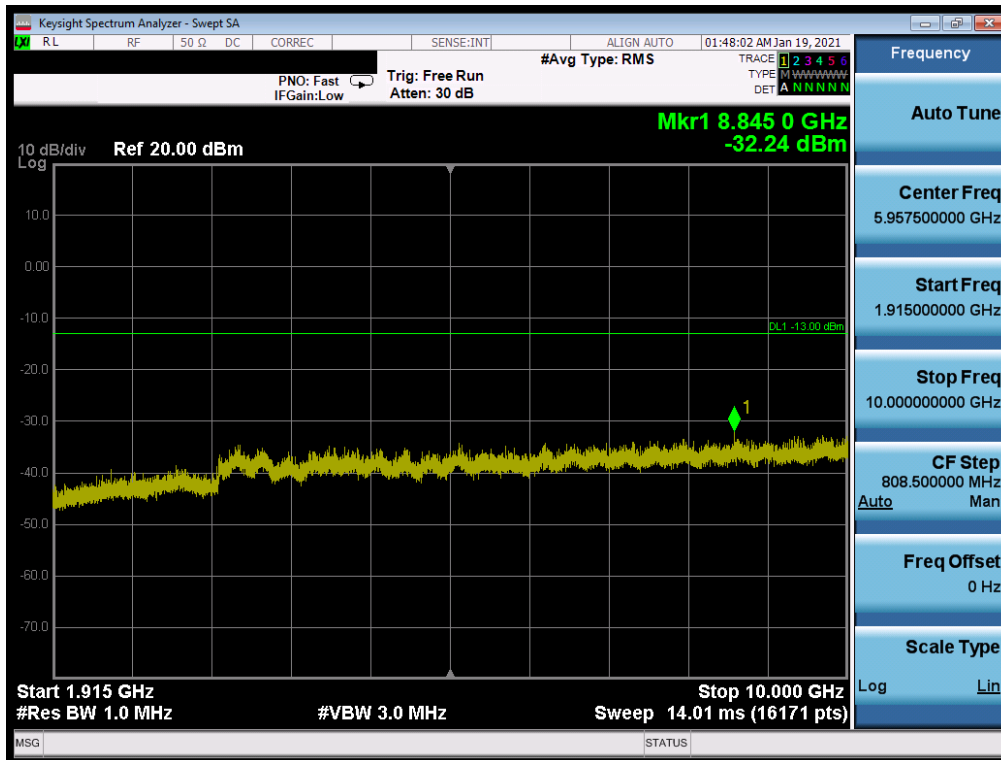

Plot 7-10. Conducted Spurious Plot (GPRS Ch. 810)

FCC ID: A3LSMG998JPN	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 18 of 36

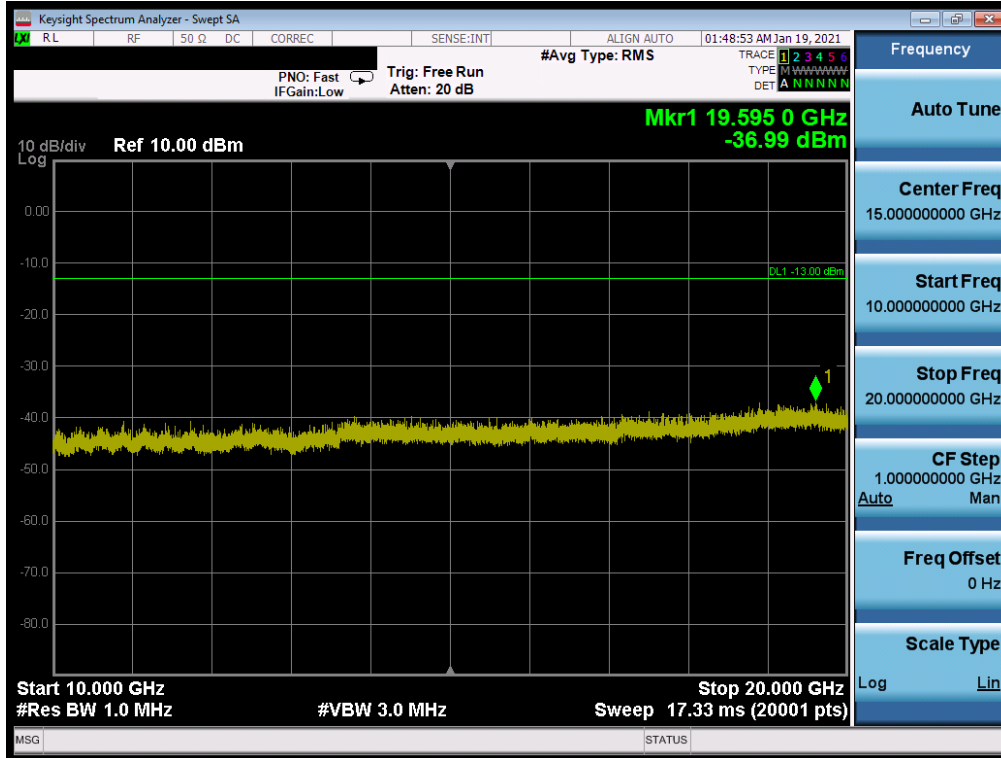

Plot 7-11. Conducted Spurious Plot (GPRS Ch. 810)

FCC ID: A3LSMG998JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 19 of 36

## 7.4 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings




1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3.  $RBW \geq 1\%$  of the emission bandwidth
4.  $VBW \geq 3 \times RBW$
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/RBW$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

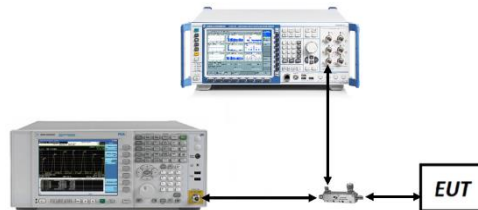The EUT and measurement equipment were set up as shown in the diagram below.





**Figure 7-3. Test Instrument & Measurement Setup**


FCC ID: A3LSMG998JPN	 <b>PCTEST</b> Proud to be part of 	<b>PART 24 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2101110003-03.A3L	<b>Test Dates:</b> 1/16/2021 - 1/21/2021	<b>EUT Type:</b> Portable Handset	Page 20 of 36	

## Test Notes


Per 24.238(a) and RSS-133(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMG998JPN	 <b>PART 24 MEASUREMENT REPORT</b> 		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2101110003-03.A3L	<b>Test Dates:</b> 1/16/2021 - 1/21/2021	<b>EUT Type:</b> Portable Handset	Page 21 of 36

**GSM/GPRS PCS**

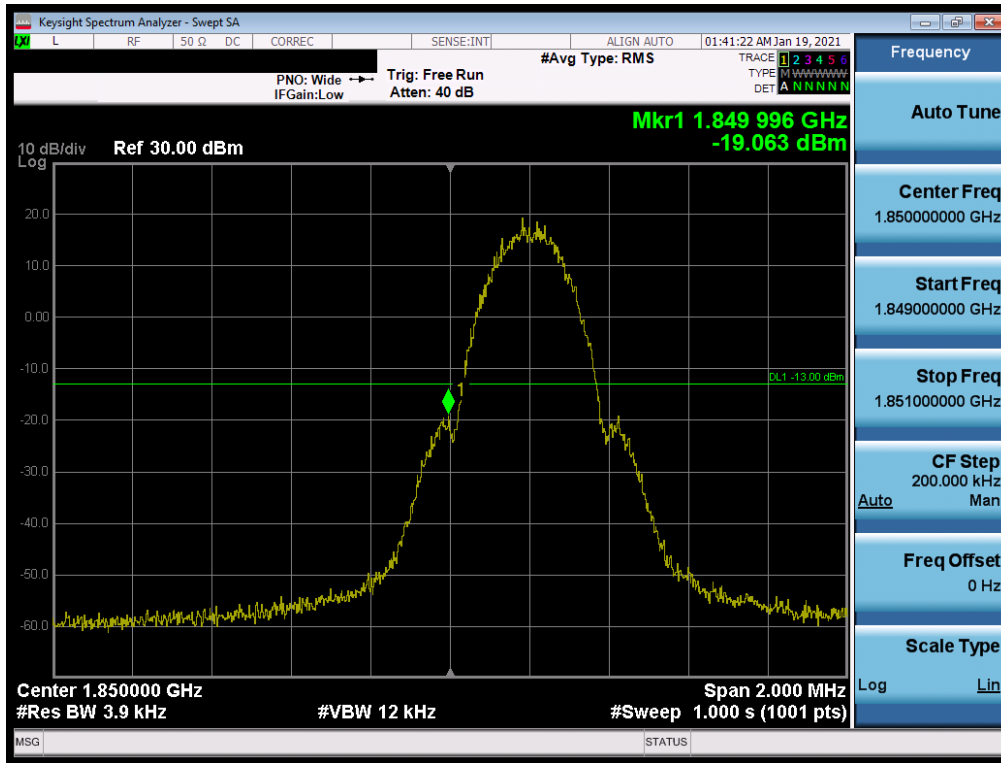

Plot 7-12. Lower Band Edge Plot (GPRS PCS – Ch. 512)

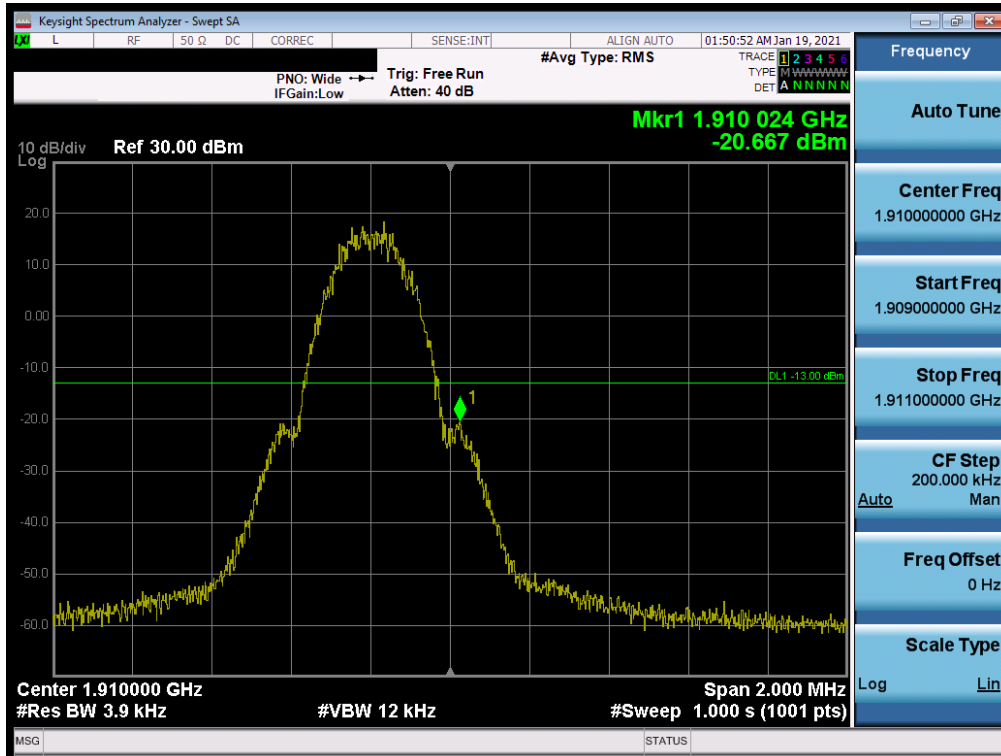

Plot 7-13. Upper Band Edge Plot (GPRS PCS – Ch. 810)

FCC ID: A3LSMG998JPN	<b>PCTEST</b> Proud to be part of element	PART 24 MEASUREMENT REPORT	<b>SAMSUNG</b>	Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 22 of 36

## 7.5 Peak-Average Ratio

### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 5.7.1

### Test Settings

1. The signal analyzer’s CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW  $\geq$  OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

### Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.

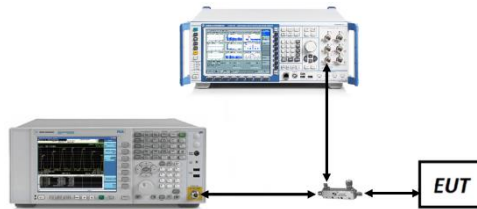


**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes


None.

FCC ID: A3LSMG998JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 23 of 36

**GSM/GPRS PCS**

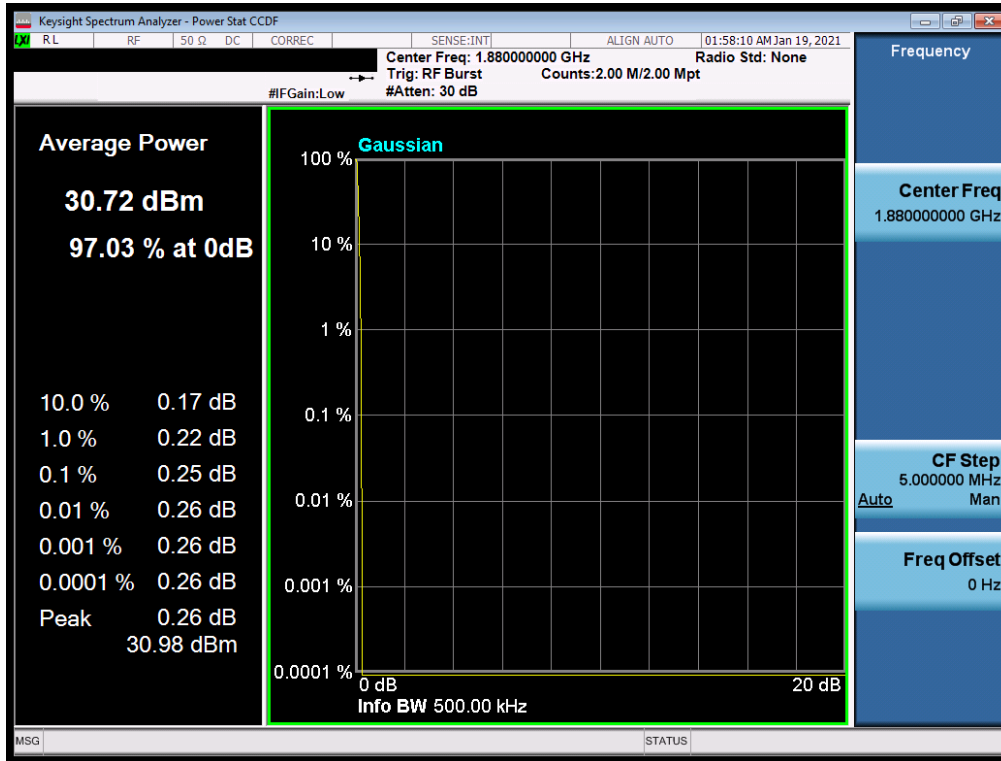

Plot 7-14. PAR Plot (GPRS, Ch. 661)

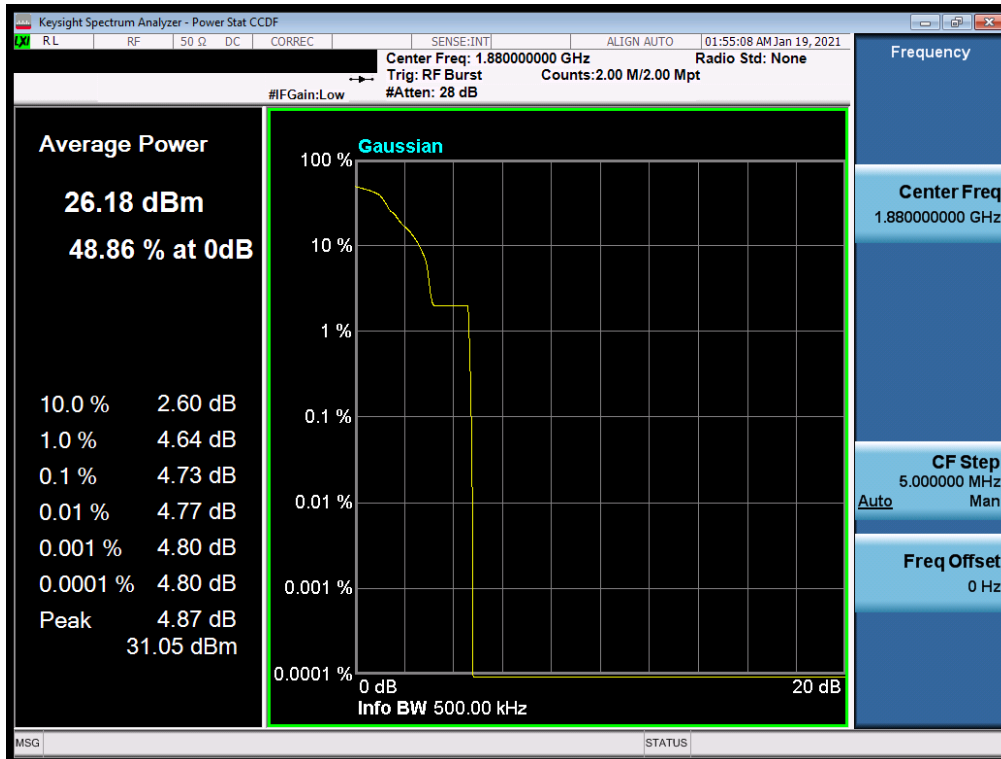

Plot 7-15. PAR Plot (EDGE, Ch. 661)

FCC ID: A3LSMG998JPN	<b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset	Page 24 of 36



## 7.6 Radiated Power (ERP/EIRP)

### Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17


### Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMG998JPN	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 25 of 36

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

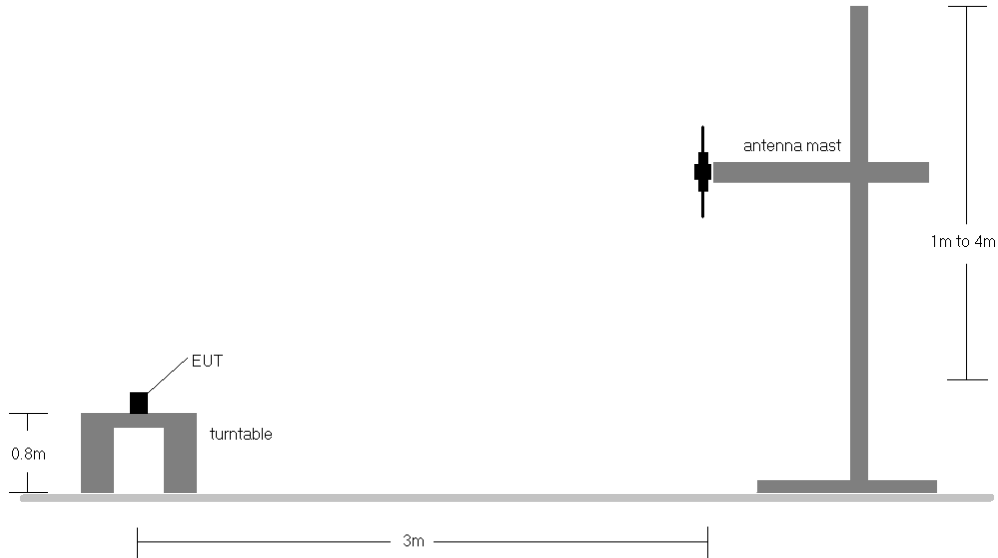

**Figure 7-5. Radiated Test Setup <1GHz**



**Test Notes**

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

<p>FCC ID: A3LSMG998JPN</p>		<p align="center"><b>PART 24 MEASUREMENT REPORT</b></p>	<p><b>Approved by:</b> Technical Manager</p>
<p><b>Test Report S/N:</b> 1M2101110003-03.A3L</p>	<p><b>Test Dates:</b> 1/16/2021 - 1/21/2021</p>	<p><b>EUT Type:</b> Portable Handset</p>	<p>Page 26 of 36</p>

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GSM1900	H	146	51	17.44	9.51	26.95	0.495	33.01	-6.06
1880.00	GSM1900	H	101	355	18.00	9.93	27.93	0.620	33.01	-5.08
1909.80	GSM1900	H	100	31	18.00	10.28	<b>28.28</b>	<b>0.673</b>	33.01	-4.73
1909.80	GSM1900	V	147	167	17.52	10.34	27.86	0.611	33.01	-5.15
1909.80	EDGE1900	H	100	31	14.95	10.28	<b>25.23</b>	0.333	33.01	-7.78
1909.80	GSM1900 (WCP)	H	286	208	17.28	10.28	27.56	0.570	33.01	-5.45

Table 7-2. EIRP Data (GPRS PCS)

FCC ID: A3LSMG998JPN	 <b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2101110003-03.A3L	<b>Test Dates:</b> 1/16/2021 - 1/21/2021	<b>EUT Type:</b> Portable Handset		Page 27 of 36

## 7.7 Radiated Spurious Emissions Measurements

### Test Overview



Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


FCC ID: A3LSMG998JPN	 PCTEST® Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 28 of 36

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

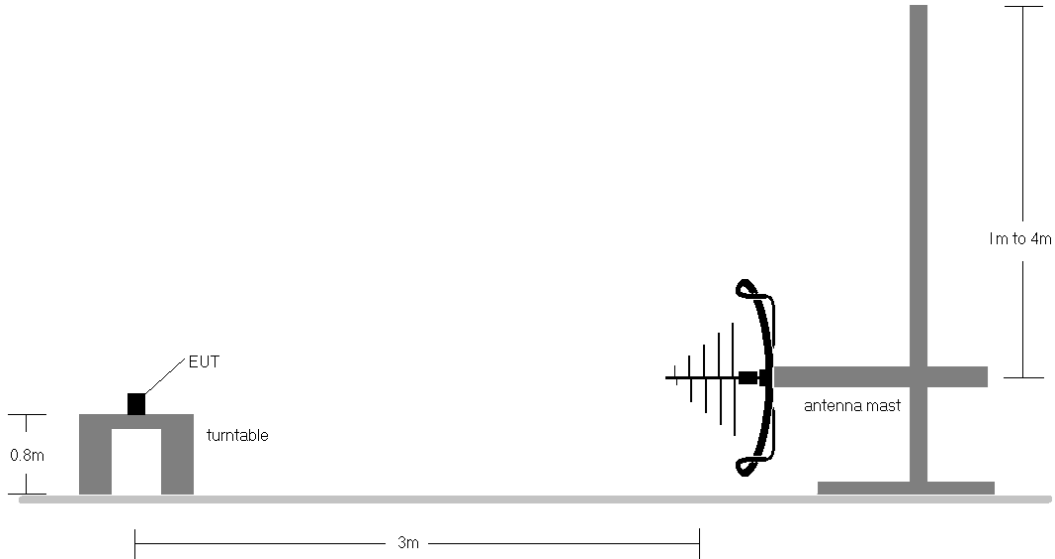

**Figure 7-6. Test Instrument & Measurement Setup < 1GHz**

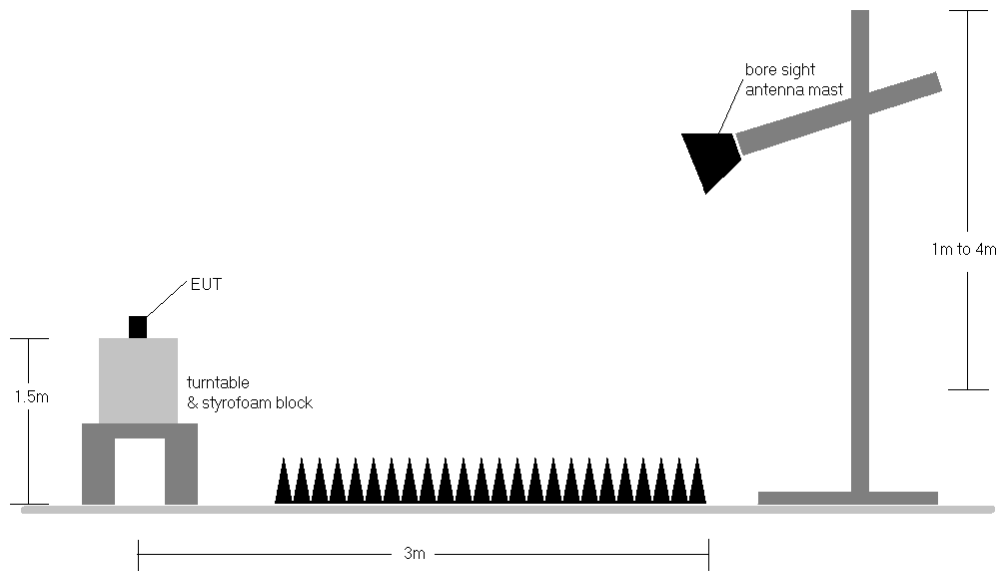



**Figure 7-7. Test Instrument & Measurement Setup >1 GHz**


<p>FCC ID: A3LSMG998JPN</p>		<p><b>PART 24 MEASUREMENT REPORT</b></p>	<p>Approved by: Technical Manager</p>
<p>Test Report S/N: 1M2101110003-03.A3L</p>	<p>Test Dates: 1/16/2021 - 1/21/2021</p>	<p>EUT Type: Portable Handset</p>	<p>Page 29 of 36</p>

## Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
  - b)  $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - d)  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
- 2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations shown in the tables below.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMG998JPN	 <b>PART 24 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset	Page 30 of 36

## GSM/GPRS PCS

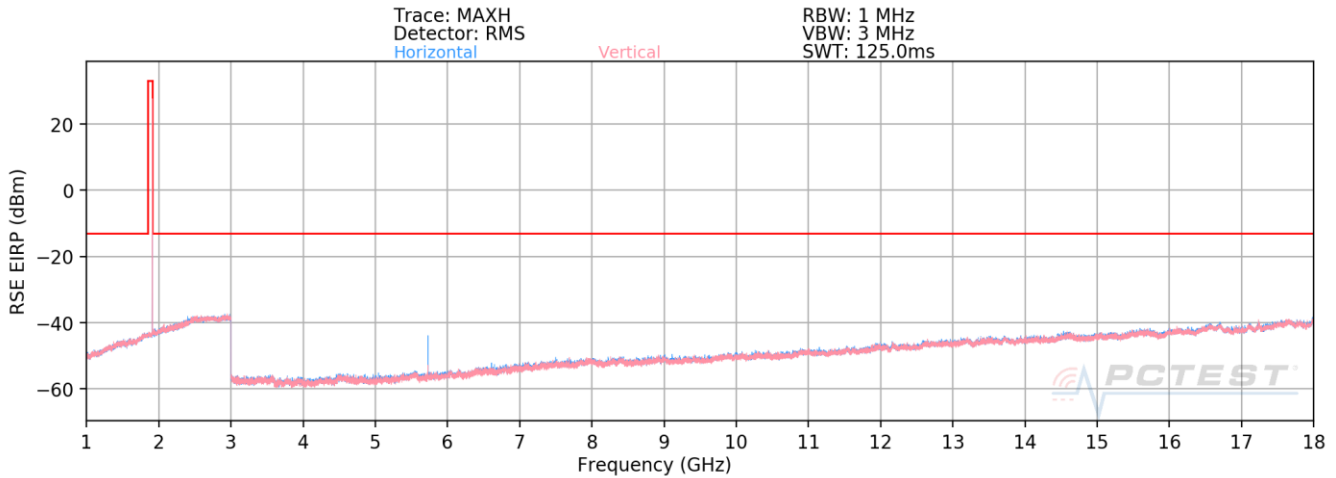

**Plot 7-16. Radiated Spurious Plot (GPRS PCS)**

Mode:	GPRS 1 Tx Slot
Channel:	512
Frequency (MHz):	1850.2



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3700.4	H	311	223	-72.01	5.40	40.39	-54.87	-13.00	-41.87
5550.6	H	272	318	-57.35	8.78	58.43	-36.82	-13.00	-23.82
7400.8	H	372	303	-73.34	12.03	45.69	-49.57	-13.00	-36.57
9251.0	H	-	-	-80.18	13.88	40.70	-54.56	-13.00	-41.56
11101.2	H	-	-	-79.67	16.35	43.68	-51.58	-13.00	-38.58
12951.4	H	-	-	-81.94	18.82	43.88	-51.37	-13.00	-38.37

**Table 7-3. Radiated Spurious Data (GPRS PCS – Low Channel)**

Mode:	GPRS 1 Tx Slot
Channel:	661
Frequency (MHz):	1880

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.0	H	379	221	-71.77	6.14	41.37	-53.89	-13.00	-40.89
5640.0	H	331	322	-56.78	8.08	58.30	-36.96	-13.00	-23.96
7520.0	H	-	-	-79.72	12.45	39.73	-55.52	-13.00	-42.52
9400.0	H	-	-	-81.63	14.66	40.03	-55.23	-13.00	-42.23
11280.0	H	-	-	-81.20	16.55	42.35	-52.91	-13.00	-39.91



**Table 7-4. Radiated Spurious Data (GPRS PCS – Mid Channel)**

FCC ID: A3LSMG998JPN	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 31 of 36

Mode:	GPRS 1 Tx Slot
Channel:	810
Frequency (MHz):	1909.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3819.6	H	393	225	-73.81	5.64	38.83	-56.43	-13.00	-43.43
5729.4	H	295	28	-61.51	8.44	53.93	-41.32	-13.00	-28.32
7639.2	H	100	359	-79.22	12.41	40.19	-55.07	-13.00	-42.07
9549.0	H	-	-	-82.13	14.51	39.38	-55.88	-13.00	-42.88
11458.8	H	-	-	-83.11	16.96	40.85	-54.41	-13.00	-41.41
13368.6	H	-	-	-83.27	19.57	43.30	-51.95	-13.00	-38.95

Table 7-5. Radiated Spurious Data (GPRS PCS – High Channel)

FCC ID: A3LSMG998JPN	 <b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 32 of 36



## 7.8 Frequency Stability / Temperature Variation

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

### Test Procedure Used

ANSI/TIA-603-E-2016

### Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes



None


FCC ID: A3LSMG998JPN	 <b>PCTEST</b> Proud to be part of element	<b>PART 24 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2101110003-03.A3L	<b>Test Dates:</b> 1/16/2021 - 1/21/2021	<b>EUT Type:</b> Portable Handset		Page 33 of 36

## GSM/GPRS PCS

OPERATING FREQUENCY: <u>1,880,000,000</u> Hz					
CHANNEL: <u>661</u>					
REFERENCE VOLTAGE: <u>4.18</u> VDC					
DEVIATION LIMIT: <u>± 0.00025 % or 2.5 ppm</u>					
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.18	+ 20 (Ref)	1,880,000,378	378	0.0000000
100 %		- 30	1,880,000,363	-15	-0.0000008
100 %		- 20	1,880,000,553	175	0.0000093
100 %		- 10	1,880,000,432	54	0.0000029
100 %		0	1,880,000,284	-94	-0.0000050
100 %		+ 10	1,880,000,442	64	0.0000034
100 %		+ 20	1,880,000,442	64	0.0000034
100 %		+ 30	1,880,000,083	-295	-0.0000157
100 %		+ 40	1,880,000,289	-89	-0.0000047
100 %		+ 50	1,880,000,210	-168	-0.0000089
85 %		+ 20	1,880,000,226	-152	-0.0000081
BATT. ENDPOINT		2.98	+ 20	1,880,000,686	308

**Table 7-6. GSM/GPRS PCS Frequency Stability Data**

FCC ID: A3LSMG998JPN	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset		Page 34 of 36

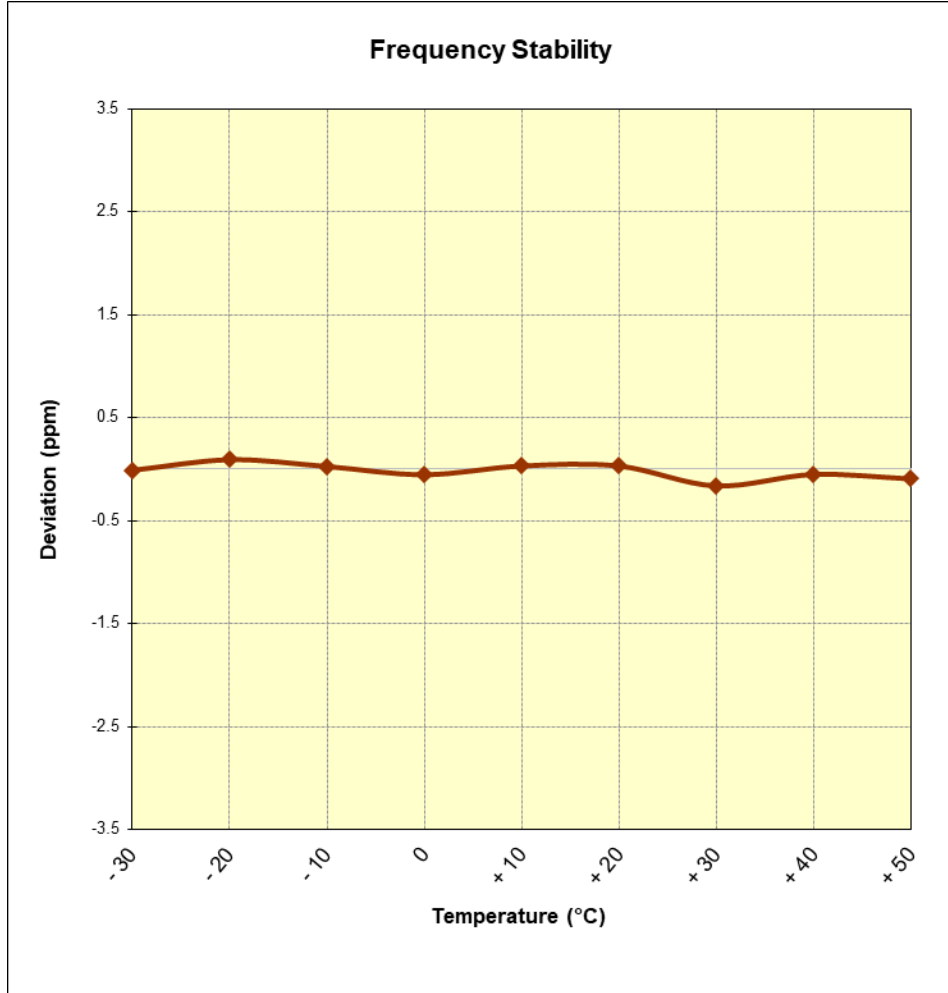



**Plot 7-17. GSM/GPRS PCS Frequency Stability Chart**

<b>FCC ID:</b> A3LSMG998JPN		<b>PART 24 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2101110003-03.A3L	<b>Test Dates:</b> 1/16/2021 - 1/21/2021	<b>EUT Type:</b> Portable Handset	Page 35 of 36	

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMG998JPN** complies with all the requirements of Part 24 of the FCC rules.

FCC ID: A3LSMG998JPN	 <b>PART 24 MEASUREMENT REPORT</b> 		Approved by: Technical Manager
Test Report S/N: 1M2101110003-03.A3L	Test Dates: 1/16/2021 - 1/21/2021	EUT Type: Portable Handset	Page 36 of 36