



SAR EVALUATION REPORT

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro, Maetan dong,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do, 16677, Korea

Date of Testing:
 11/18/20 - 12/01/20
Test Site/Location:
 PCTEST Lab, Columbia, MD, USA
Document Serial No.:
 1M2101110004-01.A3L

FCC ID: A3LSMG998U

APPLICANT: SAMSUNG ELECTRONICS CO., LTD.


DUT Type: Portable Handset
Application Type: Class II Permissive Change
FCC Rule Part(s): CFR §2.1093
Model: SM-G998U
Additional Model: SM-G998U1
Permissive Change(s): See FCC Change Document
Date of Original Certification: 12/22/20

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)	10g Phablet (W/kg)
CBE	NR Band n48	3555 - 3694.98 MHz	0.36	0.15	0.47	2.08
Simultaneous SAR per KDB 690783 D01v01r03:			0.73	0.68	0.98	2.19

Note: Only operations relevant to this permissive change were evaluated for compliance. Please see the original compliance evaluation in RF Exposure Technical Report S/N 1M2009230152-01-R2.A3L for complete evaluation of all other operating modes. The operational description includes a description of all changed items

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.9 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


 Randy Ortanez
 President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.





FCC ID: A3LSMG998U	 SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 1 of 41

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
2	LTE AND NR INFORMATION	10
3	INTRODUCTION	12
4	DOSIMETRIC ASSESSMENT	13
5	DEFINITION OF REFERENCE POINTS	14
6	TEST CONFIGURATION POSITIONS	15
7	RF EXPOSURE LIMITS	19
8	FCC MEASUREMENT PROCEDURES.....	20
9	RF CONDUCTED POWERS	21
10	SYSTEM VERIFICATION.....	24
11	SAR DATA SUMMARY	26
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	29
13	SAR MEASUREMENT VARIABILITY	36
14	EQUIPMENT LIST.....	37
15	MEASUREMENT UNCERTAINTIES.....	38
16	CONCLUSION.....	39
17	REFERENCES	40
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: SAR TISSUE SPECIFICATIONS		
APPENDIX D: SAR SYSTEM VALIDATION		
APPENDIX E: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX F: POWER REDUCTION VERIFICATION		
APPENDIX G: PROBE AND DIPOLE CALIBRATION CERTIFICATES		

FCC ID: A3LSMG998U	 PCTEST <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 2 of 41	

1 DEVICE UNDER TEST




1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
CDMA/EVDO BC10 (§90S)	Voice/Data	817.90 - 823.10 MHz
CDMA/EVDO BC0 (§22H)	Voice/Data	824.70 - 848.31 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 71	Voice/Data	665.5 - 695.5 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 14	Voice/Data	790.5 - 795.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 30	Voice/Data	2307.5 - 2312.5 MHz
LTE Band 7	Voice/Data	2502.5 - 2567.5 MHz
LTE Band 48	Voice/Data	3552.5 - 3697.5 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
LTE Band 38	Voice/Data	2572.5 - 2617.5 MHz
NR Band n71	Data	665.5 - 695.5 MHz
NR Band n12	Data	701.5 - 713.5 MHz
NR Band n5 (Cell)	Data	826.5 - 846.5 MHz
NR Band n66 (AWS)	Data	1712.5 - 1777.5 MHz
NR Band n25 (PCS)	Data	1852.5 - 1912.5 MHz
NR Band n2 (PCS)	Data	1852.5 - 1907.5 MHz
NR Band n30	Data	2307.5 - 2312.5 MHz
NR Band n41	Data	2506.02 - 2679.99 MHz
NR Band n48	Data	3555 - 3694.98 MHz
NR Band n77	Data	3710.01 - 3969.99 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
U-NII-5	Voice/Data	5925 - 6425 MHz
U-NII-6	Voice/Data	6425 - 6525 MHz
U-NII-7	Voice/Data	6525 - 6875 MHz
U-NII-8	Voice/Data	6875 - 7125 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz
NR Band n260	Data	37000 - 40000 MHz
NR Band n261	Data	27500 - 28350 MHz

1.2 Time-Averaging Algorithm for RF Exposure Compliance

This Device is enabled with the Qualcomm® Smart Transmit feature. This feature performs time averaging algorithm in real time to control and manage transmitting power and ensure the time-averaged RF exposure is in compliance with FCC requirements all the time. Refer to Compliance Summary document for detailed description of Qualcomm® Smart Transmit feature (report SN could be found in Section 1.11 – Bibliography).

Note that WLAN operations are not enabled with Smart Transmit.

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 3 of 41	

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_{design_target} , below the predefined time-averaged power limit (i.e., P_{limit} for sub-6 radio), for each characterized technology and band (see RF Exposure Part 0 Test Report, report SN could be found in Section 1.11 - Bibliography).

Smart Transmit allows the device to transmit at higher power instantaneously, as high as P_{max} , when needed, but enforces power limiting to maintain time-averaged transmit power to P_{limit} . Below table shows P_{limit} EFS settings and maximum tune up output power P_{max} configured for this EUT for various transmit conditions (Device State Index DSI). Note that the device uncertainty for sub-6GHz WWAN is 1.0dB for this EUT.

Exposure Scenario:	Body-Worn	Phablet	Phablet	Head	Hotspot	Earjack	Maximum Tune-up Output Power*
Averaging Volume:	1g	10g	10g	1g	1g	10g	
Spacing:	15 mm	8, 6, 11 mm	0 mm	0 mm	10 mm	0 mm	
DSI:	0	0	1	2	3	4	
Technology/Band	Antenna	P _{limit} corresponding to 1mW/g (SAR _{design_target})					P _{max}
NR TDD n48	I	17.5	17.5	15.0	17.5	17.5	23.5

*Note all P_{limit} EFS and maximum tune up output power P_{max} levels entered in above Table correspond to average power levels after accounting for duty cycle in the case of TDD modulation schemes (e.g. GSM and LTE TDD).

*Maximum tune up output power P_{max} is used to configure EUT during RF tune up procedure. The maximum allowed output power is equal to maximum Tune up output power + 1dB device design uncertainty.




The maximum time-averaged output power (dBm) for any 2G/3G/4G/5G Sub6 WWAN technology, band, and DSI = minimum of " P_{limit} EFS" and "Maximum tune up output power P_{max} " + 1dB device uncertainty. SAR values in this report were scaled to this maximum time-averaged output power to determine compliance per KDB Publication 447498 D01v06.

The purpose of this report (Part 1 test) is to demonstrate that the EUT meets FCC SAR limits when transmitting in static transmission scenario at maximum allowable time-averaged power levels.

Measurement Condition: All conducted power and SAR measurements in this report (Part 1 test) were performed by setting Reserve_{power_margin} (Smart Transmit EFS entry) to 0dB.

1.3 Power Reduction for SAR

This device used an independent fixed level power reduction mechanism for WLAN when 5G NR is active and also for WLAN/BT during all voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 4 of 41	

1.4 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.4.1 5G Output Power

Mode / Band		Modulated Average Output Power (in dBm)				
		DSI = 0 (Body-Worn or Phablet Max)	DSI = 1 (Phablet Reduced)	DSI = 2 (Head)	DSI = 3 (Hotspot)	DSI = 4 (Earjack)
NR TDD Band n48	Max allowed	18.5	18.5	16.0	18.5	18.5
	Nominal	17.5	17.5	15.0	17.5	17.5

For NR TDD, the above powers listed are TDD burst average values.

1.4.2 WLAN and Bluetooth Maximum and Reduced Output Powers

Only operations relevant to this permissive change were evaluated for compliance. No other target changes have been made. Targets for all other bands/exposure conditions can be found in the original filing.

1.5 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix E. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”

**Table 1-1
Device Edges/Sides for SAR Testing**

Mode	Back	Front	Top	Bottom	Right	Left
NR Band n48	Yes	Yes	No	No	Yes	No

Note: Particular DUT edges were not required to be evaluated for wireless router SAR or phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-1, U-NII-2A, U-NII-2C, and WIFI6E operations are disabled.



1.6 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix E.

1.7 Simultaneous Transmission Capabilities



According to FCC KDB Publication 447498 D01v06, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

FCC ID: A3LSMG998U	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset		Page 5 of 41



**Table 1-2
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	1x CDMA voice + 2.4 GHz WLAN	Yes	Yes	N/A	Yes	
2	1x CDMA voice + 2.4 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
3	1x CDMA voice + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
4	1x CDMA voice + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
5	1x CDMA voice + 2.4 GHz WLAN + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
6	1x CDMA voice + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
7	1x CDMA voice + 2.4 GHz WLAN + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
8	1x CDMA voice + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
9	1x CDMA voice + 2.4 GHz Bluetooth Ant 1	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
10	1x CDMA voice + 2.4 GHz Bluetooth Ant 2	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
11	1x CDMA voice + 2.4 GHz Bluetooth Ant 1 + 5 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
12	1x CDMA voice + 2.4 GHz Bluetooth Ant 1 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
13	1x CDMA voice + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
14	1x CDMA voice + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
15	1x CDMA voice + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
16	1x CDMA voice + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
17	1x CDMA voice + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
18	GSM voice + 2.4 GHz WLAN	Yes	Yes	N/A	Yes	
19	GSM voice + 2.4 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
20	GSM voice + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
21	GSM voice + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
22	GSM voice + 2.4 GHz WLAN + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
23	GSM voice + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
24	GSM voice + 2.4 GHz WLAN + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
25	GSM voice + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
26	GSM voice + 2.4 GHz Bluetooth Ant 1	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
27	GSM voice + 2.4 GHz Bluetooth Ant 2	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
28	GSM voice + 2.4 GHz Bluetooth Ant 1 + 5 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
29	GSM voice + 2.4 GHz Bluetooth Ant 1 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
30	GSM voice + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
31	GSM voice + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
32	GSM voice + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
33	GSM voice + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
34	GSM voice + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
35	UMTS + 2.4 GHz WLAN	Yes	Yes	Yes	Yes	
36	UMTS + 2.4 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
37	UMTS + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
38	UMTS + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
39	UMTS + 2.4 GHz WLAN + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
40	UMTS + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
41	UMTS + 2.4 GHz WLAN + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
42	UMTS + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
43	UMTS + 2.4 GHz Bluetooth Ant 1	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
44	UMTS + 2.4 GHz Bluetooth Ant 2	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
45	UMTS + 2.4 GHz Bluetooth Ant 1 + 5 GHz WLAN MIMO	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
46	UMTS + 2.4 GHz Bluetooth Ant 1 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
47	UMTS + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
48	UMTS + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
49	UMTS + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
50	UMTS + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
51	UMTS + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
52	LTE + 2.4 GHz WLAN	Yes	Yes	Yes	Yes	
53	LTE + 2.4 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
54	LTE + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
55	LTE + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
56	LTE + 2.4 GHz WLAN + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
57	LTE + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
58	LTE + 2.4 GHz WLAN + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
59	LTE + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
60	LTE + 2.4 GHz Bluetooth Ant 1	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
61	LTE + 2.4 GHz Bluetooth Ant 2	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
62	LTE + 2.4 GHz Bluetooth Ant 1 + 5 GHz WLAN MIMO	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
63	LTE + 2.4 GHz Bluetooth Ant 1 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
64	LTE + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
65	LTE + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
66	LTE + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
67	LTE + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
68	LTE + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered

FCC ID: A3LSMG998U	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 6 of 41	

**Table 1-3
Simultaneous Transmission Scenarios Cont.**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
69	LTE + NR	Yes	Yes	N/A	Yes	
70	LTE + NR + 2.4 GHz WLAN	Yes	Yes	Yes	Yes	
71	LTE + NR + 2.4 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
72	LTE + NR + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
73	LTE + NR + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
74	LTE + NR + 2.4 GHz WLAN + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
75	LTE + NR + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
76	LTE + NR + 2.4 GHz WLAN + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
77	LTE + NR + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
78	LTE + NR + 2.4 GHz Bluetooth Ant 1	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
79	LTE + NR + 2.4 GHz Bluetooth Ant 2	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
80	LTE + NR + 2.4 GHz Bluetooth Ant 1 + 5 GHz WLAN MIMO	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
81	LTE + NR + 2.4 GHz Bluetooth Ant 1 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
82	LTE + NR + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
83	LTE + NR + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
84	LTE + NR + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
85	LTE + NR + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
86	LTE + NR + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
87	NR + 2.4 GHz WLAN	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered.
88	NR + 2.4 GHz WLAN MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered.
89	NR + 5 GHz WLAN MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered.
90	NR + 6 GHz WLAN MIMO	Yes*	Yes*	N/A	Yes	* Pre-installed VOIP applications are considered.
91	NR + 2.4 GHz WLAN + 5 GHz WLAN MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered.
92	NR + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered.
93	NR + 2.4 GHz WLAN + 6 GHz WLAN MIMO	Yes*	Yes*	N/A	Yes	* Pre-installed VOIP applications are considered.
94	NR + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes*	Yes*	N/A	Yes	* Pre-installed VOIP applications are considered.
95	NR + 2.4 GHz Bluetooth Ant 1	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
96	NR + 2.4 GHz Bluetooth Ant 2	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
97	NR + 2.4 GHz Bluetooth Ant 1 + 5 GHz WLAN MIMO	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
98	NR + 2.4 GHz Bluetooth Ant 1 + 6 GHz WLAN MIMO	Yes^*	Yes*	N/A	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
99	NR + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
100	NR + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^*	Yes*	N/A	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
101	NR + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
102	NR + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
103	NR + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^*	Yes*	N/A	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
104	CDMA/EVDO data + 2.4 GHz WLAN	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered.
105	CDMA/EVDO data + 2.4 GHz WLAN MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered.
106	CDMA/EVDO data + 5 GHz WLAN MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered.
107	CDMA/EVDO data + 6 GHz WLAN MIMO	Yes*	Yes*	N/A	Yes	* Pre-installed VOIP applications are considered.
108	CDMA/EVDO data + 2.4 GHz WLAN + 5 GHz WLAN MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered.
109	CDMA/EVDO data + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered.
110	CDMA/EVDO data + 2.4 GHz WLAN + 6 GHz WLAN MIMO	Yes*	Yes*	N/A	Yes	* Pre-installed VOIP applications are considered.
111	CDMA/EVDO data + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes*	Yes*	N/A	Yes	* Pre-installed VOIP applications are considered.
112	CDMA/EVDO data + 2.4 GHz Bluetooth Ant 1	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
113	CDMA/EVDO data + 2.4 GHz Bluetooth Ant 2	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
114	CDMA/EVDO data + 2.4 GHz Bluetooth Ant 1 + 5 GHz WLAN MIMO	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
115	CDMA/EVDO data + 2.4 GHz Bluetooth Ant 1 + 6 GHz WLAN MIMO	Yes^*	Yes*	N/A	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
116	CDMA/EVDO data + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
117	CDMA/EVDO data + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^*	Yes*	N/A	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
118	CDMA/EVDO data + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
119	CDMA/EVDO data + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
120	CDMA/EVDO data + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes^*	Yes*	N/A	Yes	* Pre-installed VOIP applications are considered. ^ Bluetooth Tethering is considered
121	GPRS/EDGE + 2.4 GHz WLAN	N/A	N/A	Yes	Yes	
122	GPRS/EDGE + 2.4 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
123	GPRS/EDGE + 5 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
124	GPRS/EDGE + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
125	GPRS/EDGE + 2.4 GHz WLAN + 5 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
126	GPRS/EDGE + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
127	GPRS/EDGE + 2.4 GHz WLAN + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
128	GPRS/EDGE + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
129	GPRS/EDGE + 2.4 GHz Bluetooth Ant 1	N/A	N/A	Yes^	Yes	^ Bluetooth Tethering is considered
130	GPRS/EDGE + 2.4 GHz Bluetooth Ant 2	N/A	N/A	Yes^	Yes	^ Bluetooth Tethering is considered
131	GPRS/EDGE + 2.4 GHz Bluetooth Ant 1 + 5 GHz WLAN MIMO	N/A	N/A	Yes^	Yes	^ Bluetooth Tethering is considered
132	GPRS/EDGE + 2.4 GHz Bluetooth Ant 1 + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
133	GPRS/EDGE + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	N/A	N/A	Yes^	Yes	^ Bluetooth Tethering is considered
134	GPRS/EDGE + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
135	GPRS/EDGE + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2	N/A	N/A	Yes^	Yes	^ Bluetooth Tethering is considered
136	GPRS/EDGE + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	N/A	N/A	Yes^	Yes	^ Bluetooth Tethering is considered
137	GPRS/EDGE + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	

FCC ID: A3LSMG998U	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset		Page 7 of 41

1. 2.4 GHz WLAN and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
2. 5 GHz WLAN and 6 GHz WLAN share the same antenna path and cannot transmit simultaneously.
3. All licensed modes share the same antenna path and cannot transmit simultaneously.
4. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCC]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
5. Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
6. 5 GHz Wireless Router is only supported for the U-NII-3 by S/W, therefore U-NII-1, U-NII2A, and U-NII2C were not evaluated for wireless router conditions.
7. 6 GHz Wireless Router is not supported, therefore it was not evaluated for wireless router conditions.
8. This device supports 2x2 MIMO Tx for WLAN 802.11a/g/n/ac/ax. 802.11a/g/n/ac/ax supports CDD and STBC and 802.11n/ac/ax additionally supports SDM. 2.4 GHz WLAN antenna can transmit independently or together when operating with MIMO. 5/6 GHz WLAN can transmit only when operating with MIMO.
9. This device supports VoWIFI.
10. This device supports Bluetooth Tethering.
11. This device supports VoLTE.
12. LTE + 5G NR FR1 Scenarios are limited to EN-DC combinations with anchor bands as shown in the NR FR1 checklist.
13. 5G NR FR2 n260 and n261 cannot transmit simultaneously.
14. LTE + 5G NR FR2 Scenarios are limited to EN-DC combinations with anchor bands as shown in the NR FR2 checklist.

1.8 Miscellaneous SAR Test Considerations

(A) WIFI/BT

There were no changes made to the WIFI and BT operations within this device. Please see original compliance evaluation in RF Exposure Technical Report S/N 1M2009230152-01-R2.A3L for complete evaluation of these operating modes.




(B) Licensed Transmitter(s)

Only operations relevant to this permissive change were evaluated for compliance. Please see the original compliance evaluation for the standalone reported SAR for modes and bands not evaluated for this permissive change. The operational description includes a description of all changed items.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

This device supports NR capabilities with overlapping transmission frequency ranges. When the supported frequency range of an NR Band falls completely within an NR band with a larger transmission frequency range, both NR bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both NR bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

NR implementation supports SA and NSA mode. In EN-DC mode, NR operates with the LTE Bands shown in the NR FR1 checklist acting as anchor bands. Per FCC guidance, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 8 of 41	

1.9 Guidance Applied




- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- FCC KDB Publication 616217 D04v01r02 (Proximity Sensor)

1.10 Device Serial Numbers



Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

1.11 Bibliography



Report Type	Report Serial Number
RF Exposure Part 0 Test Report	1M2101110004-02.A3L

FCC ID: A3LSMG998U	 PCTEST <small>Proud to be part of </small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset		Page 9 of 41

LTE Information					
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 71 (865.5 - 895.5 MHz)				
	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 14 (790.5 - 795.5 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 66 (AWS) (1710.7 - 1770.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)				
	LTE Band 30 (2307.5 - 2312.5 MHz)				
	LTE Band 7 (2502.5 - 2567.5 MHz)				
	LTE Band 48 (3552.5 - 3697.5 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
	LTE Band 38 (2572.5 - 2617.5 MHz)				
Channel Bandwidths	LTE Band 71: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 13: 5 MHz, 10 MHz				
	LTE Band 14: 5 MHz, 10 MHz				
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 30: 5 MHz, 10 MHz				
	LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 48: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 38: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
	LTE Band 71: 5 MHz				
LTE Band 71: 10 MHz					
LTE Band 71: 15 MHz					
LTE Band 71: 20 MHz					
LTE Band 12: 1.4 MHz					
LTE Band 12: 3 MHz					
LTE Band 12: 5 MHz					
LTE Band 12: 10 MHz					
LTE Band 13: 5 MHz					
LTE Band 13: 10 MHz					
LTE Band 14: 5 MHz					
LTE Band 14: 10 MHz					
LTE Band 26 (Cell): 1.4 MHz					
LTE Band 26 (Cell): 3 MHz					
LTE Band 26 (Cell): 5 MHz					
LTE Band 26 (Cell): 15 MHz					
LTE Band 5 (Cell): 1.4 MHz					
LTE Band 5 (Cell): 3 MHz					
LTE Band 5 (Cell): 5 MHz					
LTE Band 5 (Cell): 10 MHz					
LTE Band 66 (AWS): 1.4 MHz					
LTE Band 66 (AWS): 3 MHz					
LTE Band 66 (AWS): 5 MHz					
LTE Band 66 (AWS): 10 MHz					
LTE Band 66 (AWS): 15 MHz					
LTE Band 66 (AWS): 20 MHz					
LTE Band 4 (AWS): 1.4 MHz					
LTE Band 4 (AWS): 3 MHz					
LTE Band 4 (AWS): 5 MHz					
LTE Band 4 (AWS): 10 MHz					
LTE Band 4 (AWS): 15 MHz					
LTE Band 4 (AWS): 20 MHz					
LTE Band 25 (PCS): 1.4 MHz					
LTE Band 25 (PCS): 3 MHz					
LTE Band 25 (PCS): 5 MHz					
LTE Band 25 (PCS): 10 MHz					
LTE Band 25 (PCS): 15 MHz					
LTE Band 25 (PCS): 20 MHz					
LTE Band 2 (PCS): 1.4 MHz					
LTE Band 2 (PCS): 3 MHz					
LTE Band 2 (PCS): 5 MHz					
LTE Band 2 (PCS): 10 MHz					
LTE Band 2 (PCS): 15 MHz					
LTE Band 2 (PCS): 20 MHz					
LTE Band 30: 5 MHz					
LTE Band 30: 10 MHz					
LTE Band 7: 5 MHz					
LTE Band 7: 10 MHz					
LTE Band 7: 15 MHz					
LTE Band 7: 20 MHz					
LTE Band 48: 5 MHz					
LTE Band 48: 10 MHz					
LTE Band 48: 15 MHz					
LTE Band 48: 20 MHz					
LTE Band 41: 5 MHz					
LTE Band 41: 10 MHz					
LTE Band 41: 15 MHz					
LTE Band 41: 20 MHz					
LTE Band 38: 5 MHz					
LTE Band 38: 10 MHz					
LTE Band 38: 15 MHz					
LTE Band 38: 20 MHz					
UE Category	DL UE Cat 20, UL UE Cat 18				
Modulations Supported in UL	QPSK, 16QAM, 64QAM, 256QAM				
LTE MPR Permanently Implemented per 3GPP TS 36.101 section 8.2.3-8.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 16. It supports carrier aggregation, downlink MIMO, LAA features as shown in Section 9 and Appendix F. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 16 Features are not supported: Relay, HetNet, Enhanced MIMO, eICG, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: A3LSMG998U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset		Page 10 of 41

NR Information						
Form Factor	Portable Handset					
Frequency Range of each NR transmission band	NR Band n71 (665.5 - 695.5 MHz)					
	NR Band n12 (701.5 - 713.5 MHz)					
	NR Band n5 (Cell) (826.5 - 846.5 MHz)					
	NR Band n66 (AWS) (1712.5 - 1777.5 MHz)					
	NR Band n25 (PCS) (1852.5 - 1912.5 MHz)					
	NR Band n2 (PCS) (1852.5 - 1907.5 MHz)					
	NR Band n30 (2307.5 - 2312.5 MHz)					
	NR Band n41 (2506.02 - 2679.99 MHz)					
	NR Band n48 (3555 - 3694.98 MHz)					
	NR Band n77 (3710.01 - 3969.99 MHz)					
	NR Band n71: 5 MHz, 10 MHz, 15 MHz, 20 MHz					
	NR Band n12: 5 MHz, 10 MHz, 15 MHz					
	Channel Bandwidths	NR Band n5 (Cell): 5 MHz, 10 MHz, 15 MHz, 20 MHz				
NR Band n66 (AWS): 5 MHz, 10 MHz, 15 MHz, 20 MHz, 30 MHz, 40 MHz						
NR Band n25 (PCS): 5 MHz, 10 MHz, 15 MHz, 20 MHz, 25 MHz, 30 MHz, 40 MHz						
NR Band n2 (PCS): 5 MHz, 10 MHz, 15 MHz, 20 MHz						
NR Band n30: 5 MHz, 10 MHz						
NR Band n41: 20 MHz, 30 MHz, 40 MHz, 50 MHz, 60 MHz, 80 MHz, 90 MHz, 100 MHz						
NR Band n48: 10 MHz, 20 MHz, 40 MHz						
NR Band n77: 20 MHz, 30 MHz, 40 MHz, 50 MHz, 60 MHz, 70 MHz, 80 MHz, 90 MHz, 100 MHz						
Channel Numbers and Frequencies (MHz)						
		Low	Low-Mid	Mid	Mid-High	High
NR Band n71: 5 MHz		665.5 (133147)		680.5 (136100)		695.5 (133447)
NR Band n71: 10 MHz		668 (133600)		680.5 (136100)		693 (138600)
NR Band n71: 15 MHz		670.5 (134100)		680.5 (136100)		690.5 (138100)
NR Band n71: 20 MHz	673 (134600)		680.5 (136100)		688 (137600)	
NR Band n12: 5 MHz	701.5 (140300)		707.5 (141500)		713.5 (142700)	
NR Band n12: 10 MHz	704 (140800)		707.5 (141500)		711 (142200)	
NR Band n12: 15 MHz	706.5 (141300)		707.5 (141500)		708.5 (141700)	
NR Band n5 (Cell): 5 MHz	826.5 (165300)		836.5 (167300)		846.5 (169300)	
NR Band n5 (Cell): 10 MHz	829 (165800)		836.5 (167300)		844 (168800)	
NR Band n5 (Cell): 15 MHz	831.5 (166300)		836.5 (167300)		841.5 (168300)	
NR Band n5 (Cell): 20 MHz	834 (166800)		836.5 (167300)		839 (167800)	
NR Band n66 (AWS): 5 MHz	1712.5 (342500)		1745 (349000)		1777.5 (355500)	
NR Band n66 (AWS): 10 MHz	1715 (343000)		1745 (349000)		1775 (355000)	
NR Band n66 (AWS): 15 MHz	1717.5 (343500)		1745 (349000)		1772.5 (354500)	
NR Band n66 (AWS): 20 MHz	1720 (344000)		1745 (349000)		1770 (354000)	
NR Band n66 (AWS): 30 MHz	1725 (345000)		1745 (349000)		1765 (353000)	
NR Band n66 (AWS): 40 MHz	1730 (346000)		1745 (349000)		1760 (352000)	
NR Band n25 (PCS): 5 MHz	1852.5 (370500)		1882.5 (376500)		1912.5 (382500)	
NR Band n25 (PCS): 10 MHz	1855 (371000)		1882.5 (376500)		1910 (382000)	
NR Band n25 (PCS): 15 MHz	1857.5 (371500)		1882.5 (376500)		1907.5 (381500)	
NR Band n25 (PCS): 20 MHz	1860 (372000)		1882.5 (376500)		1905 (381000)	
NR Band n25 (PCS): 25 MHz	1862.5 (372500)		1882.5 (376500)		1902.5 (380500)	
NR Band n25 (PCS): 30 MHz	1865 (373000)		1882.5 (376500)		1900 (380000)	
NR Band n25 (PCS): 40 MHz	1870 (374000)		1882.5 (376500)		1895 (379000)	
NR Band n2 (PCS): 5 MHz	1852.5 (370500)		1880 (376000)		1907.5 (381500)	
NR Band n2 (PCS): 10 MHz	1855 (371000)		1880 (376000)		1905 (381000)	
NR Band n2 (PCS): 15 MHz	1857.5 (371500)		1880 (376000)		1902.5 (380500)	
NR Band n2 (PCS): 20 MHz	1860 (372000)		1880 (376000)		1900 (380000)	
NR Band n30: 5 MHz	2307.5 (461500)		2310 (462000)		2312.5 (462500)	
NR Band n30: 10 MHz	N/A		2310 (462000)	N/A		
NR Band n41: 20 MHz	2506.02 (501204)	2549.49 (509898)	2592.99 (518598)	2636.49 (527298)	2679.99 (535998)	
NR Band n41: 30 MHz	2511 (502200)	2552.01 (510402)	2592.99 (518598)	2634 (526800)	2674.98 (534996)	
NR Band n41: 40 MHz	2516.01 (503202)	2567.34 (513468)	N/A		2670 (534000)	
NR Band n41: 50 MHz	2521.02 (504204)		2592.99 (518598)	2664.99 (532998)		
NR Band n41: 60 MHz	2526 (505200)		2592.99 (518598)	2659.98 (531996)		
NR Band n41: 80 MHz	2536.02 (507204)		N/A		2649.99 (529998)	
NR Band n41: 90 MHz	2541 (508200)		N/A		2644.98 (528996)	
NR Band n41: 100 MHz	2546.01 (509202)		2592.99 (518598)	2640 (528000)		
NR Band n48: 10 MHz	3555 (637000)	3601.66 (640112)	N/A		3694.98 (646332)	
NR Band n48: 20 MHz	3560.01 (637334)	3603.33 (640222)	N/A		3646.68 (643112)	
NR Band n48: 40 MHz	3570 (638000)	N/A		3624.99 (641666)	3679.98 (645332)	
NR Band n77: 20 MHz	3710.01 (647334)	3762 (650800)	3813.99 (654266)	3866.01 (657734)	3918 (661200)	
NR Band n77: 30 MHz	3715.02 (647668)	3765 (651000)	3815.01 (654334)	3864.99 (657666)	3915 (661000)	
NR Band n77: 40 MHz	3720 (648000)	3768 (651200)	3816 (654400)	3864 (657600)	3912 (660800)	
NR Band n77: 50 MHz	3725.01 (648334)	3782.49 (652166)	3840 (656000)		3897.51 (659834)	
NR Band n77: 60 MHz	3730.02 (648668)	3803.34 (653556)	N/A		3876.66 (658444)	
NR Band n77: 70 MHz	3735 (649000)	3804.99 (653666)	N/A		3875.01 (65334)	
NR Band n77: 80 MHz	3740.01 (649334)	N/A		3840 (656000)	3939.99 (662666)	
NR Band n77: 90 MHz	3745.02 (649668)	N/A		3840 (656000)	3934.98 (662332)	
NR Band n77: 100 MHz	3750 (650000)	N/A		N/A		
SCS for NR Band n71/n12/n5/n66/n25/n2/n30	15 kHz					
SCS for NR Band n41/n48/n77	30 kHz					
Modulations Supported in UL	DFT-s-OFDM: m/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM					
NR MPR Permanently implemented per 3GPP TS 38.101	YES					
A-MPR (Additional MPR) disabled for SAR Testing?	YES					
EN-DC Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations					
LTE Anchor Bands for NR Band n71	LTE Band 2/66					
LTE Anchor Bands for NR Band n12	LTE Band 2/66					
LTE Anchor Bands for NR Band n5 (Cell)	LTE Band 2/30/48/66					
LTE Anchor Bands for NR Band n66 (AWS)	LTE Band 2/5/12/13/14/30/48					
LTE Anchor Bands for NR Band n25 (PCS)	LTE Band 12/66					
LTE Anchor Bands for NR Band n2 (PCS)	LTE Band 5/12/13/14/30/48/66					
LTE Anchor Bands for NR Band n30	N/A					
LTE Anchor Bands for NR Band n41	LTE Band 2/12/25/41/66					
LTE Anchor Bands for NR Band n48	LTE Band 2/66					
LTE Anchor Bands for NR Band n77	LTE Band 2/5/12/13/14/30/66					

FCC ID: A3LSMG998U		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 11 of 41	

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$




SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 12 of 41	

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.







Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 13 of 41	

5

DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

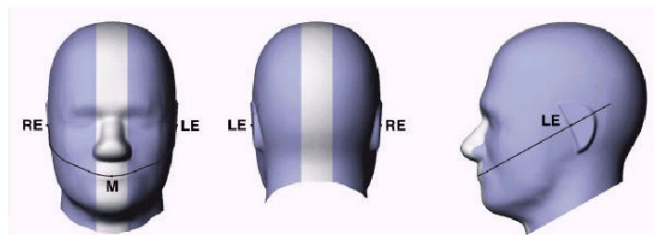


Figure 5-2
Front, back and side view of SAM Twin Phantom

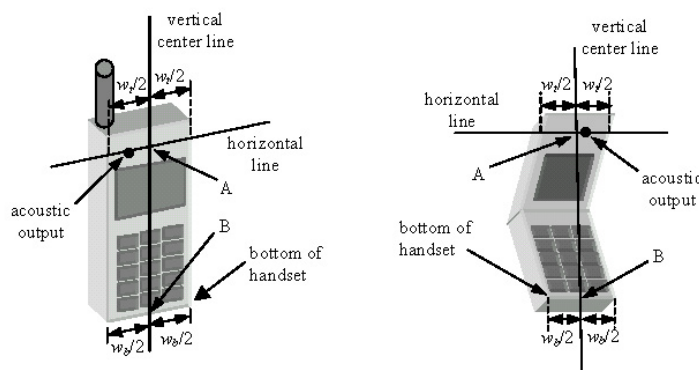




Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMG998U	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset		Page 14 of 41

6 TEST CONFIGURATION POSITIONS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

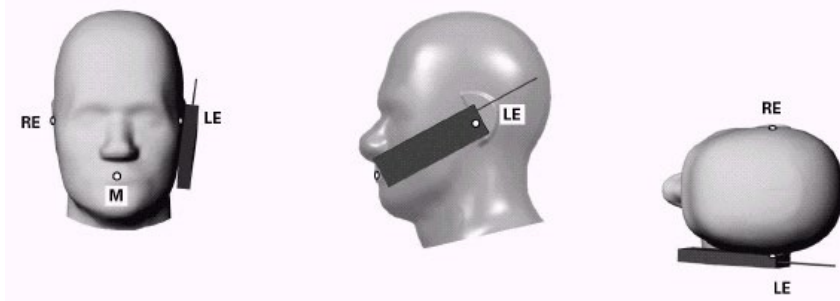





Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 15 of 41	

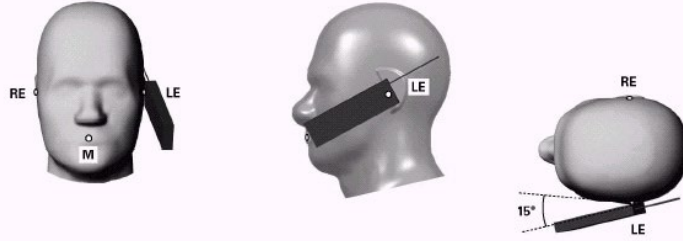


Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3 Side view w/ relevant markings

6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

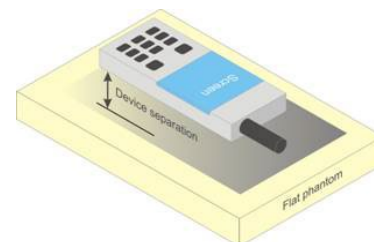





Figure 6-4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset		Page 16 of 41

contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person’s face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user’s body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.




6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

6.8 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 17 of 41	




support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤ 25 mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR > 1.2 W/kg.

6.9 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas.

FCC ID: A3LSMG998U	 <small>Proud to be part of</small> 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 18 of 41	

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**




HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMG998U	 PCTEST <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 19 of 41	

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 20 of 41	

All conducted power measurements in this section were performed by setting *Reserve_power_margin* (Qualcomm® Smart Transmit EFS entry) to 0dB, so that the EUT transmits continuously at minimum (P_{limit} , maximum tune up output power P_{max}).

9.1 NR Band n48

Table 9-1

NR Band n48 Measured P_{Limit} for DSI = 0 (Body-worn, or Phablet with grip sensor inactive), or DSI = 1 (Phablet with grip sensor active) or DSI = 4 (Earjack Active) - 40 MHz Bandwidth

NR Band n48 40 MHz Bandwidth							
Modulation	RB Size	RB Offset	Channel			MPR Allowed per 3GPP [dB]	MPR Allowed per 3GPP [dB]
			638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)		
			Conducted Power [dBm]				
DFT-s-OFDM $\pi/2$ BPSK	1	1	17.76	18.46	18.01	0	0.0
	1	53	17.81	18.42	17.96		0.0
	1	104	18.10	18.40	17.78		0.0
	50	0	17.36	17.92	17.57	0-0.5	0.5
	50	28	17.88	18.42	17.83	0	0.0
	50	56	17.72	17.99	17.56	0-0.5	0.5
100	0	17.50	17.75	17.57	0.5		
DFT-s-OFDM QPSK	1	1	17.66	18.22	17.95	0	0.0
	1	53	17.88	18.43	18.17		0.0
	1	104	17.99	18.35	17.99		0.0
	50	0	16.93	17.39	17.16	0-1	1.0
	50	28	17.92	18.20	17.84	0	0.0
	50	56	17.13	17.50	16.95	0-1	1.0
100	0	17.00	17.29	17.04	1.0		
DFT-s-OFDM 16QAM	1	1	16.86	17.42	17.33	0-1	1.0
CP-OFDM QPSK	1	1	16.62	17.00	16.71	0-1.5	1.5

Table 9-2

NR Band n48 Measured P_{Limit} for DSI = 0 (Body-worn, or Phablet with grip sensor inactive), or DSI = 1 (Phablet with grip sensor active) or DSI = 4 (Earjack Active) - 20 MHz Bandwidth

NR Band n48 20 MHz Bandwidth								
Modulation	RB Size	RB Offset	Channel				MPR Allowed per 3GPP [dB]	MPR [dB]
			637334 (3560.01 MHz)	640222 (3603.33 MHz)	643112 (3646.68 MHz)	646000 (3690 MHz)		
			Conducted Power [dBm]					
DFT-s-OFDM $\pi/2$ BPSK	1	1	18.04	18.34	18.34	18.00	0	0.0
	1	26	18.10	18.36	18.41	17.92		0.0
	1	49	18.13	18.18	18.33	17.96		0.0
	25	0	17.48	17.83	17.84	17.53	0-0.5	0.5
	25	13	17.94	18.35	18.30	17.94	0	0.0
	25	26	17.58	17.86	17.85	17.51	0-0.5	0.5
50	0	17.46	17.86	17.85	17.51	0.5		
DFT-s-OFDM QPSK	1	1	17.85	18.32	18.45	18.30	0	0.0
	1	26	17.96	18.12	18.36	17.77		0.0
	1	49	17.90	18.37	18.40	18.02		0.0
	25	0	16.85	17.41	17.39	17.09	0-1	1.0
	25	13	17.88	18.29	18.45	18.00	0	0.0
	25	26	16.91	17.41	17.35	17.01	0-1	1.0
50	0	16.89	17.44	17.39	17.02	1.0		
DFT-s-OFDM 16QAM	1	1	16.75	17.46	17.36	17.19	0-1	1.0
CP-OFDM QPSK	1	1	16.46	16.93	16.96	16.80	0-1.5	1.5



FCC ID: A3LSMG998U	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset		Page 21 of 41

Table 9-3
NR Band n48 Measured P_{Limit} for DSI = 0 (Body-worn, or Phablet with grip sensor inactive), or DSI = 1 (Phablet with grip sensor active) or DSI = 4 (Earjack Active) - 10 MHz Bandwidth

NR Band n48 10 MHz Bandwidth								
Modulation	RB Size	RB Offset	Channel				MPR Allowed per 3GPP [dB]	MPR [dB]
			637000 (3555 MHz)	640112 (3601.68 MHz)	643222 (3648.33 MHz)	646332 (3694.98 MHz)		
			Conducted Power [dBm]					
DFT-s-OFDM $\pi/2$ BPSK	1	1	17.94	18.35	18.30	17.96	0	0.0
	1	12	17.97	18.30	18.29	18.09		0.0
	1	22	17.92	18.17	18.32	18.05		0.0
	12	0	17.47	17.88	17.73	17.55	0-0.5	0.5
	12	6	17.92	18.36	18.29	18.08	0	0.0
	12	12	17.50	17.86	17.74	17.55	0-0.5	0.5
DFT-s-OFDM QPSK	24	0	17.44	17.99	17.75	17.51	0	0.5
	1	1	17.84	18.41	18.45	18.19		0.0
	1	12	18.00	18.30	18.35	18.10		0.0
	1	22	17.90	18.24	18.40	17.83	0	0.0
	12	0	16.97	17.47	17.31	16.93	0-1	1.0
	12	6	17.90	18.37	18.41	18.05	0	0.0
DFT-s-OFDM 16QAM	12	12	16.86	17.25	17.39	16.95	0-1	1.0
	24	0	16.97	17.38	17.29	16.95		1.0
CP-OFDM QPSK	1	1	17.11	17.17	17.43	17.09	0-1	1.0
CP-OFDM QPSK	1	1	16.54	17.00	16.98	16.87	0-1.5	1.5

Table 9-4
NR Band n48 Measured P_{Limit} for DSI = 2 (Head)- 40 MHz Bandwidth

NR Band n48 40 MHz Bandwidth								
Modulation	RB Size	RB Offset	Channel			MPR Allowed per 3GPP [dB]	MPR Allowed per 3GPP [dB]	
			638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)			
			Conducted Power [dBm]					
DFT-s-OFDM $\pi/2$ BPSK	1	1	15.16	15.83	15.62	0	0.0	
	1	53	15.31	15.74	15.35		0.0	
	1	104	15.54	15.62	15.21		0.0	
	50	0	15.38	15.70	15.46	0-0.5	0.0	
	50	28	15.55	15.74	15.35	0	0.0	
	50	56	15.58	15.68	15.34	0-0.5	0.0	
100	0	15.58	15.61	15.34	0.0			
DFT-s-OFDM QPSK	1	1	15.33	15.86	15.44	0	0.0	
	1	53	15.37	15.70	15.47		0.0	
	1	104	15.58	15.60	15.30		0.0	
	50	0	15.45	15.72	15.49	0-1	0.0	
	50	28	15.39	15.70	15.39	0	0.0	
	50	56	15.47	15.69	15.35	0-1	0.0	
100	0	15.47	15.67	15.40	0.0			
DFT-s-OFDM 16QAM	1	1	15.30	15.67	15.60	0-1	0.0	
CP-OFDM QPSK	1	1	15.39	15.88	15.49	0-1.5	0.0	




FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 22 of 41	

Table 9-5
NR Band n48 Measured P_{Limit} for DSI = 2 (Head)- 20 MHz Bandwidth

NR Band n48 20 MHz Bandwidth								
Modulation	RB Size	RB Offset	Channel				MPR Allowed per 3GPP [dB]	MPR [dB]
			637334 (3560.01 MHz)	640222 (3603.33 MHz)	643112 (3646.68 MHz)	646000 (3690 MHz)		
			Conducted Power [dBm]					
DFT-s-OFDM $\pi/2$ BPSK	1	1	15.34	15.47	15.85	15.26	0	0.0
	1	26	15.34	15.65	15.72	15.22		0.0
	1	49	15.55	15.66	15.64	15.29		0.0
	25	0	15.30	15.61	15.80	15.37	0-0.5	0.0
	25	13	15.42	15.70	15.88	15.30	0	0.0
	25	26	15.59	15.70	15.50	15.20	0-0.5	0.0
DFT-s-OFDM QPSK	1	1	15.35	15.72	15.67	15.40	0	0.0
	1	26	15.30	15.57	15.72	15.24		0.0
	1	49	15.56	15.99	15.70	15.35		0.0
	25	0	15.37	15.65	15.64	15.45	0-1	0.0
	25	13	15.39	15.71	15.62	15.35	0	0.0
	25	26	15.54	15.71	15.62	15.35	0-1	0.0
DFT-s-OFDM 16QAM	1	1	15.50	15.90	15.99	15.70	0-1	0.0
CP-OFDM QPSK	1	1	15.31	15.99	15.46	15.75	0-1.5	0.0

Table 9-6
NR Band n48 Measured P_{Limit} for DSI = 2 (Head)- 10 MHz Bandwidth

NR Band n48 10 MHz Bandwidth								
Modulation	RB Size	RB Offset	Channel				MPR Allowed per 3GPP [dB]	MPR [dB]
			637000 (3555 MHz)	640112 (3601.68 MHz)	643222 (3648.33 MHz)	646332 (3694.98 MHz)		
			Conducted Power [dBm]					
DFT-s-OFDM $\pi/2$ BPSK	1	1	15.38	15.61	15.71	15.46	0	0.0
	1	12	15.39	15.70	15.63	15.19		0.0
	1	22	15.46	15.50	15.66	15.50		0.0
	12	0	15.31	15.70	15.56	15.28	0-0.5	0.0
	12	6	15.28	15.69	15.80	15.35	0	0.0
	12	12	15.36	15.84	15.60	15.40	0-0.5	0.0
DFT-s-OFDM QPSK	24	0	15.35	15.76	15.67	15.34	0	0.0
	1	1	15.45	15.61	15.70	15.50		0.0
	1	12	15.38	15.84	15.90	15.67		0.0
	1	22	15.45	15.71	15.91	15.21	0-1	0.0
	12	0	15.37	15.70	15.59	15.27	0	0.0
	12	6	15.37	15.90	15.90	15.46	0-1	0.0
DFT-s-OFDM 16QAM	1	1	15.68	15.98	15.62	15.62	0-1	0.0
CP-OFDM QPSK	1	1	15.43	15.74	15.40	15.41	0-1.5	0.0

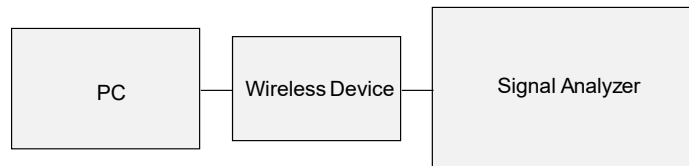


Figure 9-1
Power Measurement Setup

FCC ID: A3LSMG998U	PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 23 of 41	




10 SYSTEM VERIFICATION

10.1 Tissue Verification

**Table 10-1
Measured Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
11/23/2020	3600H	21.7	3500	2.821	36.925	2.913	37.929	-3.16%	-2.65%
			3560	2.881	36.831	2.974	37.860	-3.13%	-2.72%
			3600	2.912	36.750	3.015	37.814	-3.42%	-2.81%
			3650	2.961	36.654	3.066	37.757	-3.42%	-2.92%
			3690	2.995	36.588	3.107	37.711	-3.60%	-2.98%
			3700	3.006	36.565	3.117	37.700	-3.56%	-3.01%
11/18/2020	3600B	20.2	3500	3.315	51.844	3.314	51.321	0.03%	1.02%
			3560	3.389	51.749	3.384	51.240	0.15%	0.99%
			3600	3.434	51.645	3.431	51.186	0.09%	0.90%
			3650	3.506	51.557	3.489	51.118	0.49%	0.86%
			3690	3.552	51.481	3.536	51.063	0.45%	0.82%
			3700	3.566	51.447	3.548	51.050	0.51%	0.78%
12/01/2020	3600B	20.0	3500	3.339	49.437	3.314	51.321	0.75%	-3.67%
			3560	3.414	49.329	3.384	51.240	0.89%	-3.73%
			3600	3.458	49.215	3.431	51.186	0.79%	-3.85%
			3650	3.525	49.141	3.489	51.118	1.03%	-3.87%
			3690	3.571	49.066	3.536	51.063	0.99%	-3.91%
			3700	3.585	49.042	3.548	51.050	1.04%	-3.93%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 24 of 41	

10.2 Test System Verification


Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix D.

**Table 10-2
System Verification Results – 1g**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
L	3500	HEAD	11/23/2020	21.4	21.7	0.100	1097	7539	6.720	66.400	67.200	1.20%
L	3700	HEAD	11/23/2020	21.4	21.7	0.100	1067	7539	7.170	67.200	71.700	6.70%
L	3500	BODY	11/18/2020	22.1	20.1	0.100	1097	7539	6.740	64.200	67.400	4.98%
L	3700	BODY	11/18/2020	22.1	20.1	0.100	1067	7539	6.800	65.200	68.000	4.29%

**Table 10-3
System Verification Results – 10g**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{10g} (W/kg)	1 W Target SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation _{10g} (%)
L	3500	BODY	12/01/2020	23.1	20.0	0.100	1097	7539	2.490	23.800	24.900	4.62%
L	3700	BODY	12/01/2020	23.1	20.0	0.100	1067	7539	2.450	23.300	24.500	5.15%

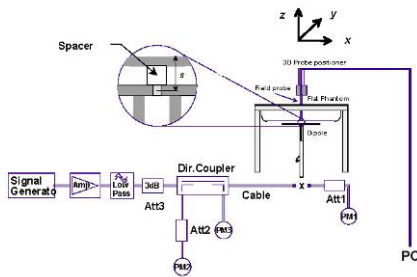

**Figure 10-1
System Verification Setup Diagram**



**Figure 10-2
System Verification Setup Photo**

FCC ID: A3LSMG998U	PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset		Page 25 of 41

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

**Table 11-1
NR Band n48 Head SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Antenna Config	Power Drift [dB]	MPR [dB]	Serial Number	Waveform	Modulation	RB Size	RB Offset	Test Position	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
3624.99	641666	Mid	NR Band n48	40	16.0	15.86	I	0.19	0	3921S	DFT-S-OFDM	QPSK	1	1	Cheek	Right	1:1	0.326	1.033	0.337	
3624.99	641666	Mid	NR Band n48	40	16.0	15.72	I	0.02	0	3921S	DFT-S-OFDM	QPSK	50	0	Cheek	Right	1:1	0.335	1.067	0.357	A1
3624.99	641666	Mid	NR Band n48	40	16.0	15.88	I	0.13	0	3921S	CP-OFDM	QPSK	1	1	Cheek	Right	1:1	0.334	1.028	0.343	
3624.99	641666	Mid	NR Band n48	40	16.0	15.86	I	0.13	0	3921S	DFT-S-OFDM	QPSK	1	1	Tilt	Right	1:1	0.033	1.033	0.034	
3624.99	641666	Mid	NR Band n48	40	16.0	15.72	I	0.17	0	3921S	DFT-S-OFDM	QPSK	50	0	Tilt	Right	1:1	0.031	1.067	0.033	
3624.99	641666	Mid	NR Band n48	40	16.0	15.86	I	0.07	0	3921S	DFT-S-OFDM	QPSK	1	1	Cheek	Left	1:1	0.116	1.033	0.120	
3624.99	641666	Mid	NR Band n48	40	16.0	15.72	I	-0.05	0	3921S	DFT-S-OFDM	QPSK	50	0	Cheek	Left	1:1	0.123	1.067	0.131	
3624.99	641666	Mid	NR Band n48	40	16.0	15.86	I	0.03	0	3921S	DFT-S-OFDM	QPSK	1	1	Tilt	Left	1:1	0.059	1.033	0.061	
3624.99	641666	Mid	NR Band n48	40	16.0	15.72	I	-0.03	0	3921S	DFT-S-OFDM	QPSK	50	0	Tilt	Left	1:1	0.060	1.067	0.064	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram											

11.2 Standalone Body-Worn SAR Data



**Table 11-2
NR Band n48 Body-Worn SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Antenna Config	Power Drift [dB]	MPR [dB]	Serial Number	Waveform	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
3624.99	641666	Mid	NR Band n48	40	18.5	18.43	I	0.10	0	3972S	DFT-S-OFDM	QPSK	1	53	15 mm	back	1:1	0.139	1.016	0.141	
3624.99	641666	Mid	NR Band n48	40	18.5	18.20	I	0.12	0	3972S	DFT-S-OFDM	QPSK	50	28	15 mm	back	1:1	0.143	1.072	0.153	A2
3624.99	641666	Mid	NR Band n48	40	17.0	17.00	I	0.02	1.5	3972S	CP-OFDM	QPSK	1	1	15 mm	back	1:1	0.097	1.000	0.097	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram											

11.3 Standalone Hotspot SAR Data

**Table 11-3
NR Band n48 Hotspot SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Antenna Config	Power Drift [dB]	MPR [dB]	Serial Number	Waveform	Modulation	RB Size	RB Offset	Spacing	MPR [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
3624.99	641666	Mid	NR Band n48	40	18.5	18.43	I	0.02	0	3972S	DFT-S-OFDM	QPSK	1	53	10 mm	back	1:1	0.237	1.016	0.241	
3624.99	641666	Mid	NR Band n48	40	18.5	18.20	I	-0.03	0	3972S	DFT-S-OFDM	QPSK	50	28	10 mm	back	1:1	0.243	1.072	0.260	
3624.99	641666	Mid	NR Band n48	40	18.5	18.43	I	-0.13	0	3972S	DFT-S-OFDM	QPSK	1	53	10 mm	front	1:1	0.161	1.016	0.164	
3624.99	641666	Mid	NR Band n48	40	18.5	18.20	I	0.17	0	3972S	DFT-S-OFDM	QPSK	50	28	10 mm	front	1:1	0.155	1.072	0.166	
3624.99	641666	Mid	NR Band n48	40	18.5	18.43	I	0.02	0	3972S	DFT-S-OFDM	QPSK	1	53	10 mm	right	1:1	0.425	1.016	0.432	
3624.99	641666	Mid	NR Band n48	40	18.5	18.20	I	0.01	0	3972S	DFT-S-OFDM	QPSK	50	28	10 mm	right	1:1	0.436	1.072	0.467	A3
3624.99	641666	Mid	NR Band n48	40	17.0	17.00	I	-0.06	1.5	3972S	CP-OFDM	QPSK	1	1	10 mm	right	1:1	0.291	1.000	0.291	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: A3LSMG998U	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 26 of 41	

11.4 Standalone Phablet SAR Data



**Table 11-4
NR Band n48 Phablet SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Antenna Config	Power Drift [dB]	MPR [dB]	Serial Number	Waveform	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g) (W/kg)	Scaling Factor	Reported SAR (10g) (W/kg)	Plot #	
MHz	Ch.																				
3570.00	638000	Low	NR Band n48	40	18.5	17.99	I	0.17	0	3972S	DFT-S-OFDM	QPSK	1	104	0 mm	right	1:1	1.530	1.125	1.721	
3624.99	641666	Mid	NR Band n48	40	18.5	18.43	I	0.11	0	3972S	DFT-S-OFDM	QPSK	1	53	0 mm	right	1:1	1.520	1.016	1.544	
3679.98	645332	High	NR Band n48	40	18.5	18.17	I	0.05	0	3972S	DFT-S-OFDM	QPSK	1	53	0 mm	right	1:1	1.730	1.079	1.867	
3570.00	638000	Low	NR Band n48	40	18.5	17.92	I	0.02	0	3972S	DFT-S-OFDM	QPSK	50	28	0 mm	right	1:1	1.520	1.143	1.737	
3624.99	641666	Mid	NR Band n48	40	18.5	18.20	I	0.00	0	3972S	DFT-S-OFDM	QPSK	50	28	0 mm	right	1:1	1.610	1.072	1.726	
3679.98	645332	High	NR Band n48	40	18.5	17.84	I	-0.03	0	3972S	DFT-S-OFDM	QPSK	50	28	0 mm	right	1:1	1.790	1.164	2.084	A4
3624.99	641666	Mid	NR Band n48	40	17.5	17.29	I	-0.02	1	3972S	DFT-S-OFDM	QPSK	100	0	0 mm	right	1:1	1.280	1.050	1.344	
3624.99	641666	Mid	NR Band n48	40	17.0	17.00	I	-0.02	1.5	3972S	CP-OFDM	QPSK	1	1	0 mm	right	1:1	1.080	1.000	1.080	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Phablet 4.0 W/kg (mW/g) averaged over 10 grams											

11.5 SAR Test Notes




General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
- Per FCC KDB Publication 865664 D01v01r04, variability SAR tests were not required since measured SAR results for all frequency bands were less than 0.8 W/kg.
- During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
- Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is > 160 mm and < 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.
- Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information).
- Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the 1g thresholds for the equivalent test cases.
- This device uses Qualcomm Smart Transmit for 2G/3G/4G/5G operations to control and manage transmitting power in real time to ensure RF Exposure compliance. Per FCC Guidance, compliance was assessed at the minimum of the time averaged power and the maximum output power for each band/mode/exposure condition (DSI).

FCC ID: A3LSMG998U	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 27 of 41	

NR Notes:

1. NR implementation supports SA and NSA mode. In EN-DC mode, NR operates with the LTE Bands shown in the NR FR1 checklist acting as anchor bands. Per FCC guidance, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors.
2. Due to test setup limitations, SAR testing for NR was performed using test mode software to establish the connection.
3. Simultaneous transmission analysis for EN-DC operations is addressed in the Part 2 Test Report (Serial Number can be found in the original filing).
4. This device additionally supports some EN-DC conditions where additional LTE carriers are added on the downlink only.
5. Per FCC Guidance, NR modulations and RB Sizes/Offsets were selected for testing such that configurations with the highest output power were evaluated for SAR tests.

FCC ID: A3LSMG998U	 <small>Proud to be part of</small> 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 28 of 41	

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

Please see the original compliance evaluation for the standalone reported SAR for modes and bands not evaluated for this permissive change.




12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

(*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for the applicable exposure conditions was used for simultaneous transmission analysis.

Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure from 4G and time-averaged RF exposure from 5G NR. Smart Transmit algorithm controls the total RF exposure from both 4G and 5G NR to not exceed FCC limit. Therefore, simultaneous transmission compliance between 4G+5G operations is demonstrated in the Qualcomm Part 2 Report during algorithm validation.

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset		Page 29 of 41

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-1
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	2.4 GHz WLAN MIMO at 19 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2	1+3	1+4
Head SAR	Right Cheek	0.357	0.127*	0.307*	0.298	0.484	0.664	0.655
	Right Tilt	0.034	0.127*	0.307*	0.400*	0.161	0.341	0.434
	Left Cheek	0.131	0.127*	0.307	0.400	0.258	0.438	0.531
	Left Tilt	0.064	0.127	0.307*	0.400*	0.191	0.371	0.464

Table 12-2
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	5 GHz WLAN MIMO at 16 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Right Cheek	0.357	0.068	0.425
	Right Tilt	0.034	0.146*	0.180
	Left Cheek	0.131	0.146	0.277
	Left Tilt	0.064	0.146*	0.210

Table 12-3
Simultaneous Transmission Scenario with 6 GHz WLAN (Held to Ear)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	6 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Right Cheek	0.357	0.018	0.375
	Right Tilt	0.034	0.016	0.050
	Left Cheek	0.131	0.023	0.154
	Left Tilt	0.064	0.008	0.072

Table 12-4
Simultaneous Transmission Scenario with 2.4 GHz WLAN and 5 GHz WLAN MIMO (Held to Ear)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	2.4 GHz WLAN MIMO at 16 dBm SAR (W/kg)	5 GHz WLAN MIMO at 16 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	5	1+2+5	1+3+5	1+4+5
Head SAR	Right Cheek	0.357	0.127*	0.307*	0.100	0.068	0.552	0.732	0.525
	Right Tilt	0.034	0.127*	0.307*	0.166*	0.146*	0.307	0.487	0.346
	Left Cheek	0.131	0.127*	0.307	0.166	0.146	0.404	0.584	0.443
	Left Tilt	0.064	0.127	0.307*	0.166*	0.146*	0.337	0.517	0.376



FCC ID: A3LSMG998U	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset		Page 30 of 41

Table 12-5
Simultaneous Transmission Scenario with 2.4 GHz WLAN and 6 GHz WLAN MIMO (Held to Ear)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	2.4 GHz WLAN MIMO at 16 dBm SAR (W/kg)	6 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	5	1+2+5	1+3+5	1+4+5
Head SAR	Right Cheek	0.357	0.127*	0.307*	0.100	0.018	0.502	0.682	0.475
	Right Tilt	0.034	0.127*	0.307*	0.166*	0.016	0.177	0.357	0.216
	Left Cheek	0.131	0.127*	0.307	0.166	0.023	0.281	0.461	0.320
	Left Tilt	0.064	0.127	0.307*	0.166*	0.008	0.199	0.379	0.238

Table 12-6
Simultaneous Transmission Scenario with Bluetooth (Held to Ear)




Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz Bluetooth Ant 1 SAR (W/kg)	2.4 GHz Bluetooth Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	Right Cheek	0.357	0.027	0.115	0.384	0.472	0.499
	Right Tilt	0.034	0.024	0.027	0.058	0.061	0.085
	Left Cheek	0.131	0.015	0.142	0.146	0.273	0.288
	Left Tilt	0.064	0.022	0.008	0.086	0.072	0.094

Table 12-7
Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN (Held to Ear)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz Bluetooth Ant 1 SAR (W/kg)	2.4 GHz Bluetooth Ant 2 SAR (W/kg)	5 GHz WLAN MIMO at 16 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+4	1+3+4	1+2+3+4
Head SAR	Right Cheek	0.357	0.027	0.115	0.068	0.452	0.540	0.567
	Right Tilt	0.034	0.024	0.027	0.146*	0.204	0.207	0.231
	Left Cheek	0.131	0.015	0.142	0.146	0.292	0.419	0.434
	Left Tilt	0.064	0.022	0.008	0.146*	0.232	0.218	0.240

Table 12-8
Simultaneous Transmission Scenario with Bluetooth and 6 GHz WLAN (Held to Ear)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz Bluetooth Ant 1 SAR (W/kg)	2.4 GHz Bluetooth Ant 2 SAR (W/kg)	6 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+4	1+3+4	1+2+3+4
Head SAR	Right Cheek	0.357	0.027	0.115	0.018	0.402	0.490	0.517
	Right Tilt	0.034	0.024	0.027	0.016	0.074	0.077	0.101
	Left Cheek	0.131	0.015	0.142	0.023	0.169	0.296	0.311
	Left Tilt	0.064	0.022	0.008	0.008	0.094	0.080	0.102

FCC ID: A3LSMG998U	 <small>Proud to be part of</small> 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset		Page 31 of 41

12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-9
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body - Worn SAR	Back Side	0.153	0.209	0.134	0.362	0.287	0.496

Table 12-10
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.5 cm)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body - Worn SAR	Back Side	0.153	0.472	0.625

Table 12-11
Simultaneous Transmission Scenario with 6 GHz WLAN (Body-Worn at 1.5 cm)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	6 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body - Worn SAR	Back Side	0.153	0.061	0.214

Table 12-12
Simultaneous Transmission Scenario with 2.4 GHz WLAN and 5 GHz WLAN MIMO (Body-Worn at 1.5 cm)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	2.4 GHz WLAN MIMO at 19 dBm SAR (W/kg)	5 GHz WLAN MIMO at 16 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	5	1+2+5	1+3+5	1+4+5
Body - Worn SAR	Back Side	0.153	0.209	0.134	0.074	0.110	0.472	0.397	0.337

Table 12-13
Simultaneous Transmission Scenario with 2.4 GHz WLAN and 6 GHz WLAN MIMO (Body-Worn at 1.5 cm)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	2.4 GHz WLAN MIMO at 19 dBm SAR (W/kg)	6 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	5	1+2+5	1+3+5	1+4+5
Body - Worn SAR	Back Side	0.153	0.209	0.134	0.074	0.061	0.423	0.348	0.288

Table 12-14
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.5 cm)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz Bluetooth Ant 1 SAR (W/kg)	2.4 GHz Bluetooth Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Body - Worn SAR	Back Side	0.153	0.046	0.012	0.199	0.165	0.211



FCC ID: A3LSMG998U	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 32 of 41	

Table 12-15

Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN MIMO (Body-Worn at 1.5 cm)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz Bluetooth Ant 1 SAR (W/kg)	2.4 GHz Bluetooth Ant 2 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+4	1+3+4	1+2+3+4
Body - Worn SAR	Back Side	0.153	0.046	0.012	0.472	0.671	0.637	0.683

Table 12-16

Simultaneous Transmission Scenario with Bluetooth and 6 GHz WLAN MIMO (Body-Worn at 1.5 cm)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz Bluetooth Ant 1 SAR (W/kg)	2.4 GHz Bluetooth Ant 2 SAR (W/kg)	6 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+4	1+3+4	1+2+3+4
Body - Worn SAR	Back Side	0.153	0.046	0.012	0.061	0.260	0.226	0.272

12.5 Hotspot SAR Simultaneous Transmission Analysis

Table 12-17

Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	Back	0.260	0.454	0.266	0.714	0.526	0.980
	Front	0.166	0.039	0.229	0.205	0.395	0.434
	Top	-	0.105	-	0.105	-	0.105
	Bottom	-	-	-	-	-	-
	Right	0.467	-	-	0.467	0.467	0.467
	Left	-	0.454*	0.458	0.454	0.458	0.912

Table 12-18

Simultaneous Transmission Scenario with 5 GHz WLAN MIMO (Hotspot at 1.0 cm)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.260	0.492	0.752
	Front	0.166	0.103	0.269
	Top	-	0.492*	0.492
	Bottom	-	-	-
	Right	0.467	-	0.467
	Left	-	0.362	0.362



FCC ID: A3LSMG998U	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 33 of 41	

Table 12-19
Simultaneous Transmission Scenario with 2.4 GHz WLAN and 5 GHz WLAN MIMO (Hotspot at 1.0 cm)



Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	2.4 GHz WLAN MIMO at 19 dBm SAR (W/kg)	5 GHz WLAN MIMO at 16 dBm SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	5	1+2+5	1+3+5	1+4+5
Body SAR	Back	0.260	0.454	0.266	0.182	0.174	0.888	0.700	0.616
	Front	0.166	0.039	0.229	0.066	0.037	0.242	0.432	0.269
	Top	-	0.105	-	0.056	0.040	0.145	0.040	0.096
	Bottom	-	-	-	-	-	0.000	0.000	0.000
	Right	0.467	-	-	-	-	0.467	0.467	0.467
	Left	-	0.454*	0.458	0.118	0.094	0.094	0.552	0.212

Table 12-20
Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz Bluetooth Ant 1 SAR (W/kg)	2.4 GHz Bluetooth Ant 2 SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Hotspot SAR	Back	0.260	0.122	0.034	0.382	0.294	0.416
	Front	0.166	0.023	0.023	0.189	0.189	0.212
	Top	-	0.021	-	0.021	-	0.021
	Bottom	-	-	-	-	-	-
	Right	0.467	-	-	0.467	0.467	0.467
	Left	-	0.005	0.064	0.005	0.064	0.069

Table 12-21
Simultaneous Transmission Scenario with Bluetooth and 5 GHz WLAN (Hotspot at 1.0 cm)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	2.4 GHz Bluetooth Ant 1 SAR (W/kg)	2.4 GHz Bluetooth Ant 2 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)		
		1	2	3	4	1+2+4	1+3+4	1+2+3+4
Hotspot SAR	Back	0.260	0.122	0.034	0.492	0.874	0.786	0.908
	Front	0.166	0.023	0.023	0.103	0.292	0.292	0.315
	Top	-	0.021	-	0.492*	0.513	0.492	0.513
	Bottom	-	-	-	-	-	-	-
	Right	0.467	-	-	-	0.467	0.467	0.467
	Left	-	0.005	0.064	0.362	0.367	0.426	0.431

FCC ID: A3LSMG998U	 <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset		Page 34 of 41

12.6 Phablet Simultaneous Transmission Analysis

For SAR summation, the highest reported SAR across all test distances was used as the most conservative evaluation for simultaneous transmission analysis for each device edge.

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required if wireless router 1g SAR (scaled to the maximum output power, including tolerance) < 1.2 W/kg. Therefore no further analysis beyond the tables included in this section was required to determine that possible simultaneous transmission scenarios would not exceed the SAR limit.

Table 12-22
Simultaneous Transmission Scenario with 5 GHz WLAN MIMO (Phablet)




Simult Tx	Configuration	NR Band n48 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	Back	-	1.111	1.111
	Front	-	1.016	1.016
	Top	-	2.194*	2.194
	Bottom	-	-	-
	Right	2.084	-	2.084
	Left	-	2.194	2.194

Table 12-23
Simultaneous Transmission Scenario with 6 GHz WLAN MIMO (Phablet)

Simult Tx	Configuration	NR Band n48 SAR (W/kg)	6 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	Back	-	0.322	0.322
	Front	-	0.020	0.020
	Top	-	0.011	0.011
	Bottom	-	-	-
	Right	2.084	-	2.084
	Left	-	0.031	0.031

12.7 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 35 of 41	




13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, variability SAR tests were not required since measured SAR results for all frequency bands were less than 0.8 W/kg

13.2 Measurement Uncertainty




The measured SAR was <1.5 W/kg for 1g and <3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset		Page 36 of 41

14 EQUIPMENT LIST




Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	85033E	3.5mm Standard Calibration Kit	6/6/2020	Annual	6/6/2021	MY53402352
Agilent	E4438C	ESG Vector Signal Generator	3/8/2019	Biennial	3/8/2021	MY42082385
Agilent	E4438C	ESG Vector Signal Generator	9/8/2020	Biennial	9/8/2022	MY45090700
Agilent	N5182A	MXG Vector Signal Generator	2/19/2020	Annual	2/19/2021	MY47420651
Agilent	N5182A	MXG Vector Signal Generator	5/13/2020	Annual	5/13/2021	MY47420603
Agilent	8753ES	S-Parameter Network Analyzer	12/31/2019	Annual	12/31/2020	US39170122
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	353468
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433978
Anritsu	ML2495A	Power Meter	12/17/2019	Annual	12/17/2020	941001
Anritsu	ML2496A	Power Meter	3/23/2020	Annual	3/23/2021	1351001
Anritsu	MA2411B	Pulse Power Sensor	12/4/2019	Annual	12/4/2020	1126066
Anritsu	MA2411B	Pulse Power Sensor	9/22/2020	Annual	9/22/2021	1339008
Anritsu	MA24106A	USB Power Sensor	12/9/2019	Annual	12/9/2020	1349503
Anritsu	MA24106A	USB Power Sensor	10/19/2020	Annual	10/19/2021	1344559
COMTech	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4352	Long Stem Thermometer	6/26/2019	Biennial	6/26/2021	192282744
Control Company	4352	Long Stem Thermometer	5/16/2020	Biennial	5/16/2022	200294416
Control Company	4040	Therm./ Clock/ Humidity Monitor	2/17/2020	Biennial	2/17/2022	200113269
Control Company	4040	Therm./Clock/Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291463
Insize	1108-150	Digital Caliper	1/17/2020	Biennial	1/17/2022	409193536
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	N6705B	DC Power Analyzer	4/27/2019	Biennial	4/27/2021	MY53004059
Keysight Technologies	N9020A	MXA Signal Analyzer	8/14/2020	Annual	8/14/2021	US46470561
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	9/1/2020	Annual	9/1/2021	MY53401181
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	NC-100	Torque Wrench	8/4/2020	Biennial	8/4/2022	N/A
Pasternack	NC-100	Torque Wrench	8/4/2020	Biennial	8/4/2022	N/A
Rohde & Schwarz	ZNLE6	Vector Network Analyzer	9/29/2020	Annual	9/29/2021	101307
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	8/12/2020	Annual	8/12/2021	1041
SPEAG	D3500V2	3500 MHz SAR Dipole	1/21/2020	Annual	1/21/2021	1097
SPEAG	D3700V2	3700 MHz SAR Dipole	1/21/2020	Annual	1/21/2021	1067
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/20/2020	Annual	5/20/2021	728
SPEAG	EX3DV4	SAR Probe	10/20/2020	Annual	10/20/2021	7539

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 37 of 41	

15 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS					11.5	11.3	60
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2					23.0	22.6	




FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 38 of 41	

16 CONCLUSION

16.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]




FCC ID: A3LSMG998U	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 39 of 41	

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: A3LSMG998U	 PCTEST <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 40 of 41	

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMG998U	 PCTEST Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2101110004-01.A3L	Test Dates: 11/18/20 - 12/01/20	DUT Type: Portable Handset	Page 41 of 41	