



Plot 7-458. Power Spectral Density Plot ANT6 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 100)

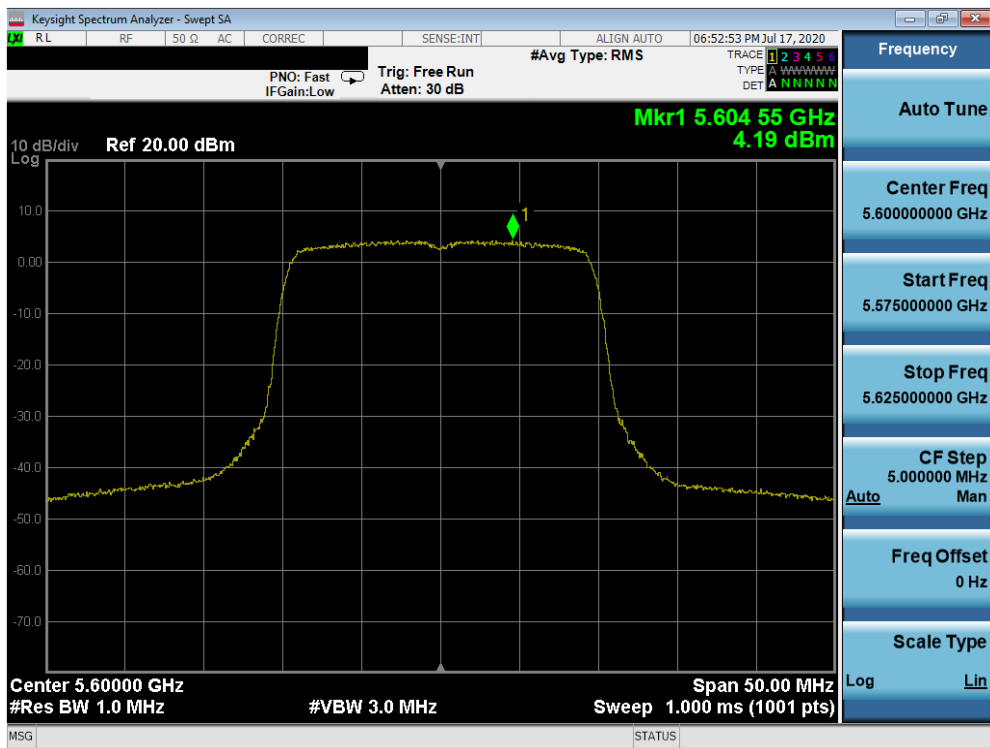


Plot 7-459. Power Spectral Density Plot ANT6 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 264 of 344

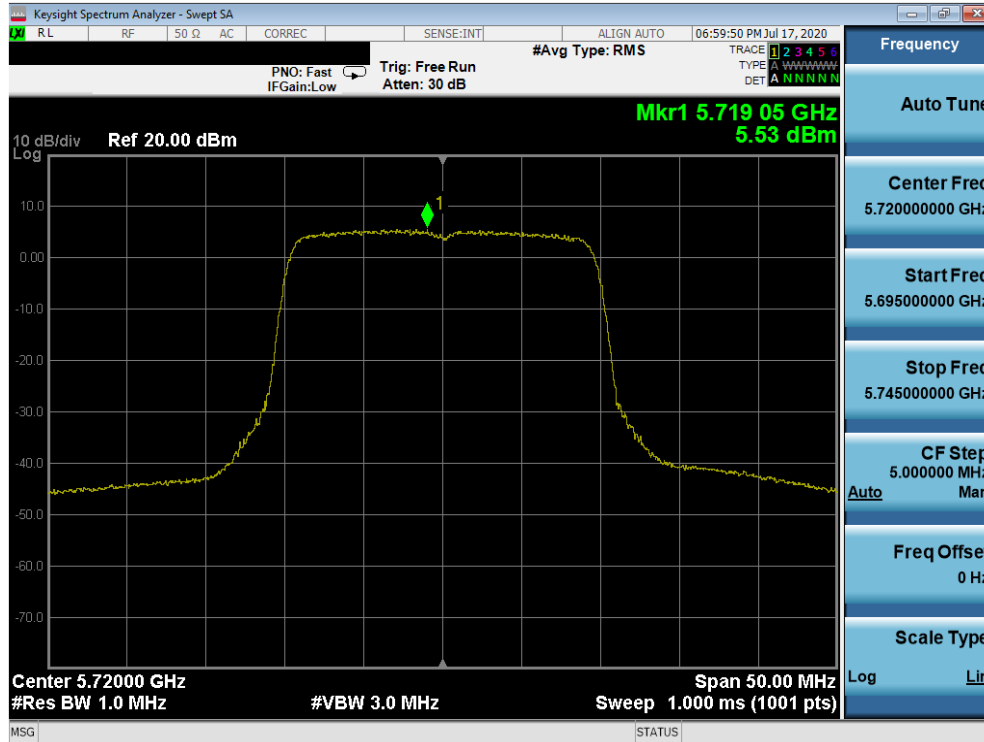


Plot 7-460. Power Spectral Density Plot ANT6 (20MHz BW 802.11ax (UNII Band 2C) – Ch. 144)

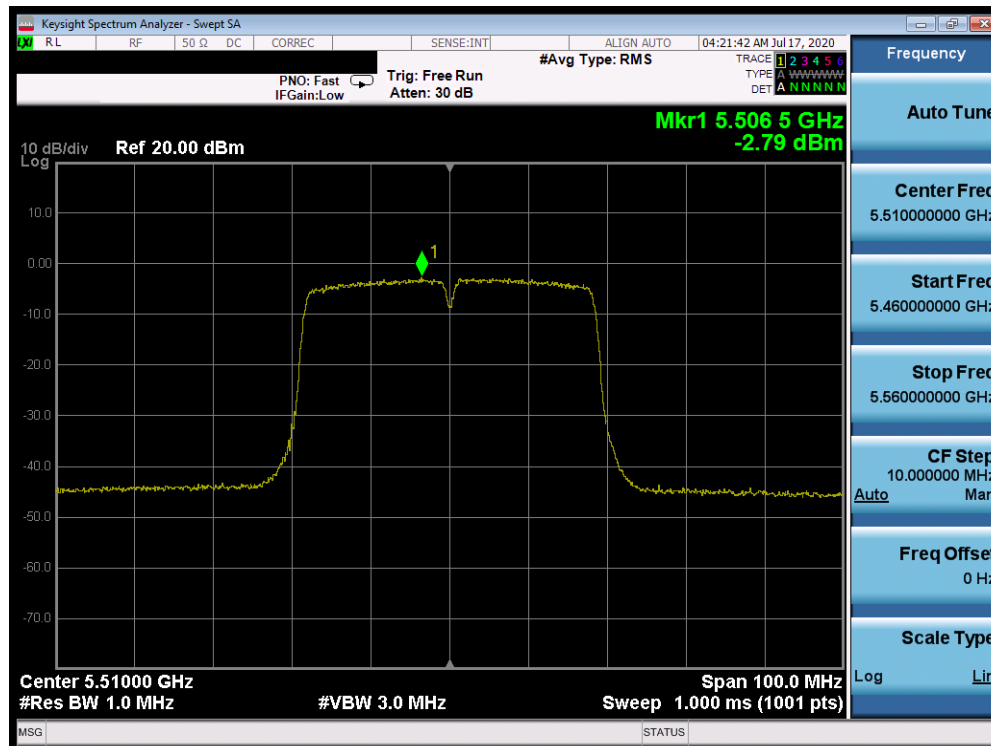


Plot 7-461. Power Spectral Density Plot ANT6 (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 265 of 344

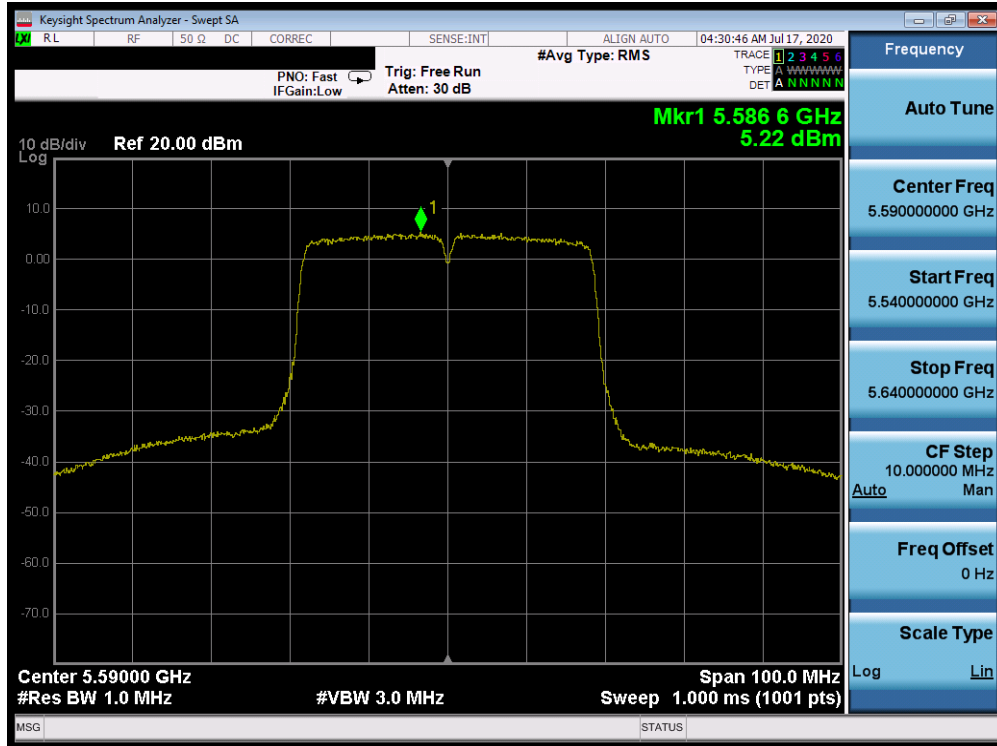


Plot 7-462. Power Spectral Density Plot ANT6 (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

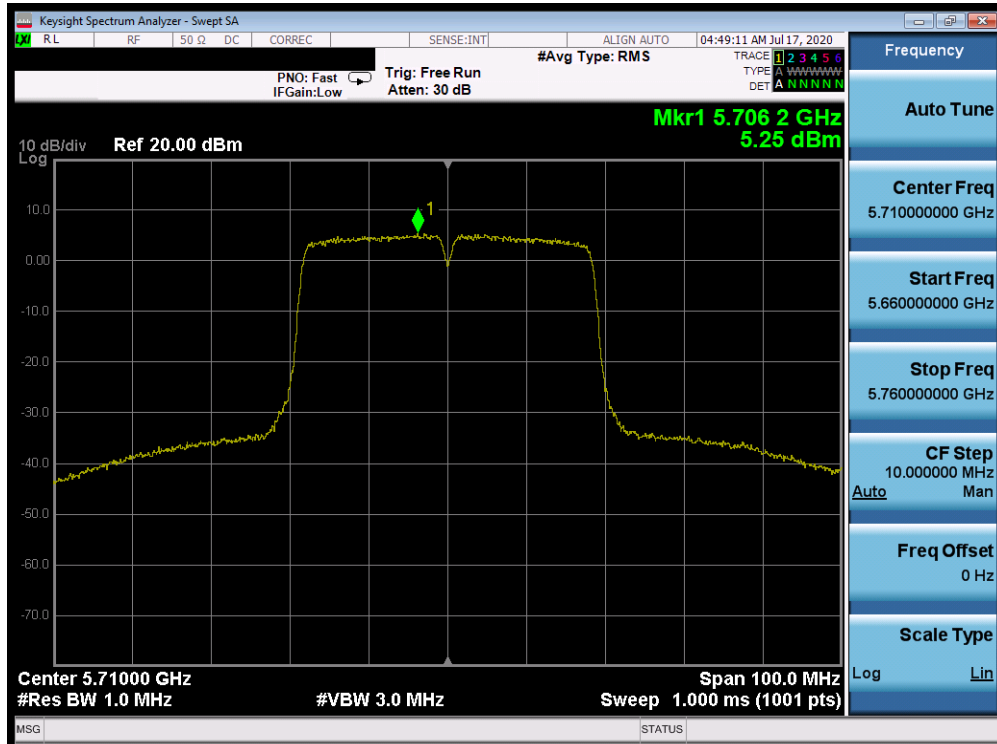


Plot 7-463. Power Spectral Density Plot ANT6 (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 266 of 344

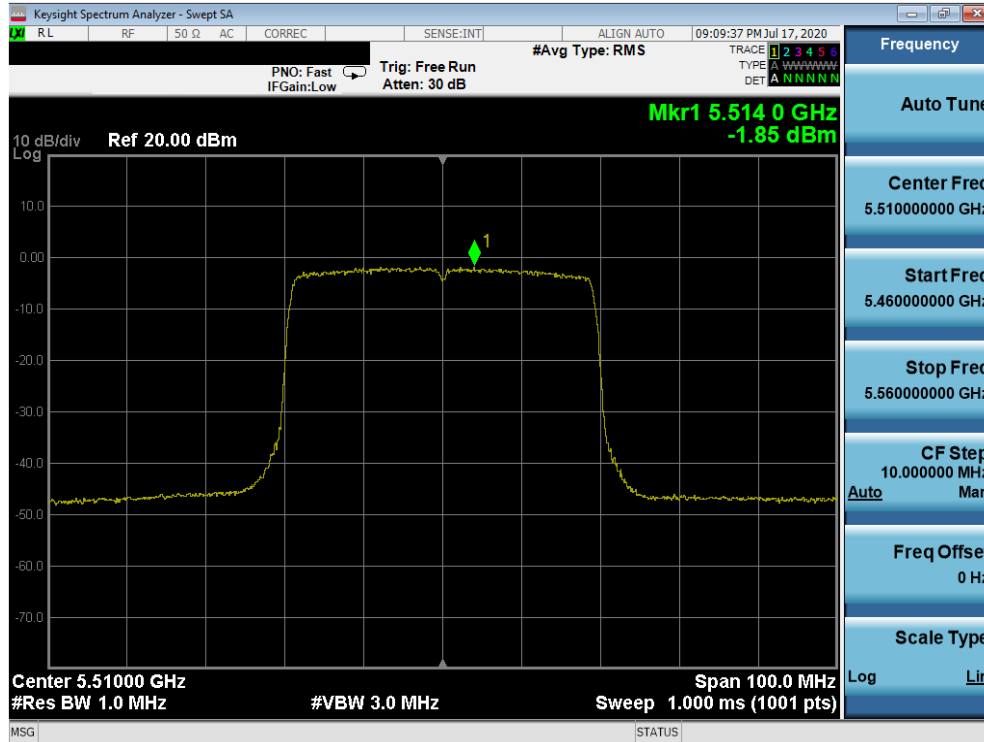


Plot 7-464. Power Spectral Density Plot ANT6 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 102)

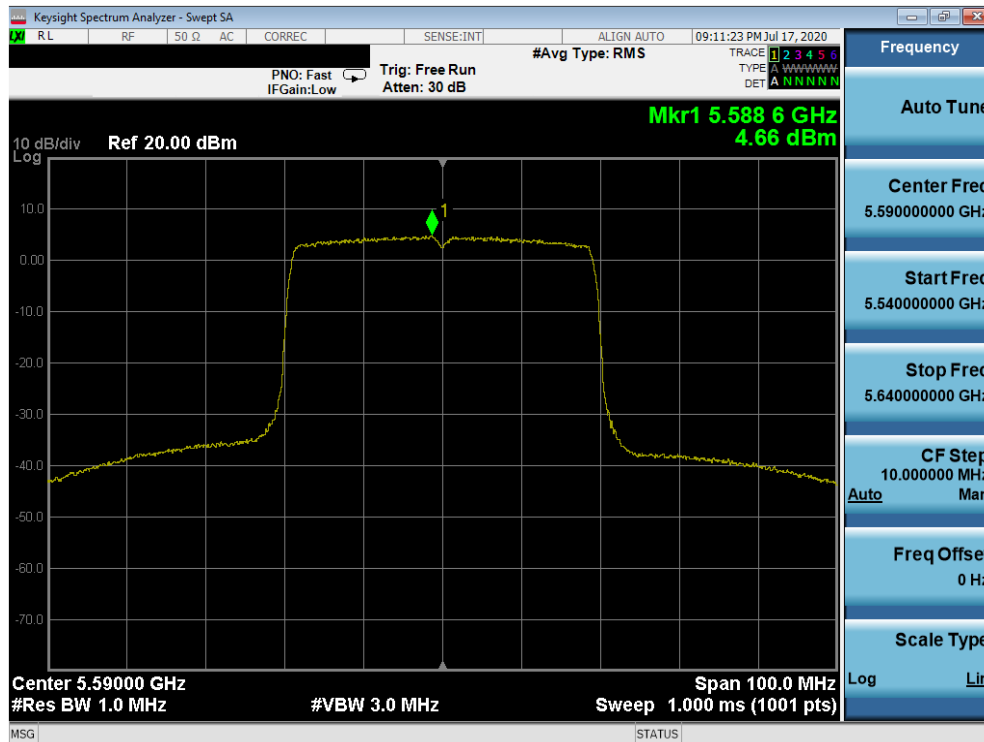


Plot 7-465. Power Spectral Density Plot ANT6 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 118)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 267 of 344

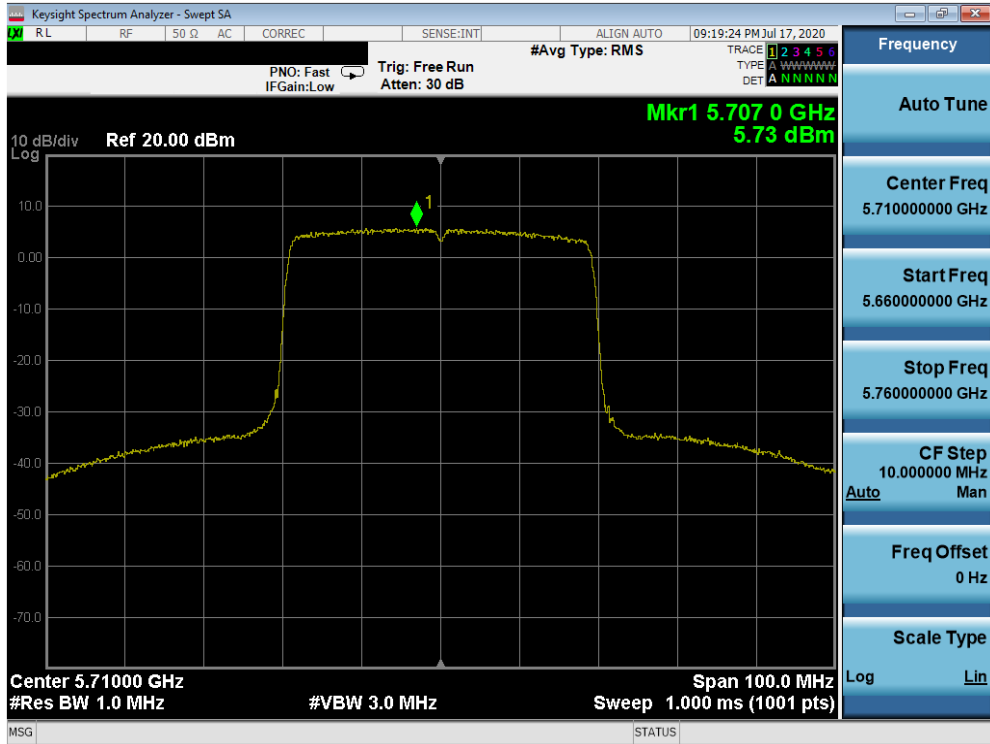


Plot 7-466. Power Spectral Density Plot ANT6 (40MHz BW 802.11ax (UNII Band 2C) – Ch. 142)

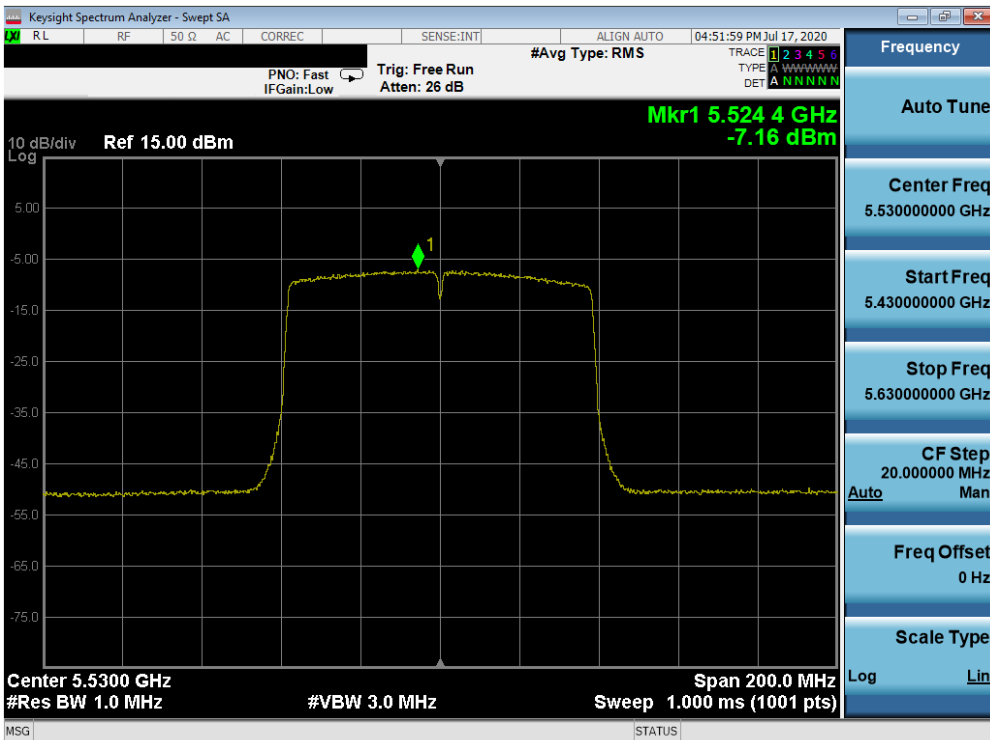


Plot 7-467. Power Spectral Density Plot ANT6 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 268 of 344

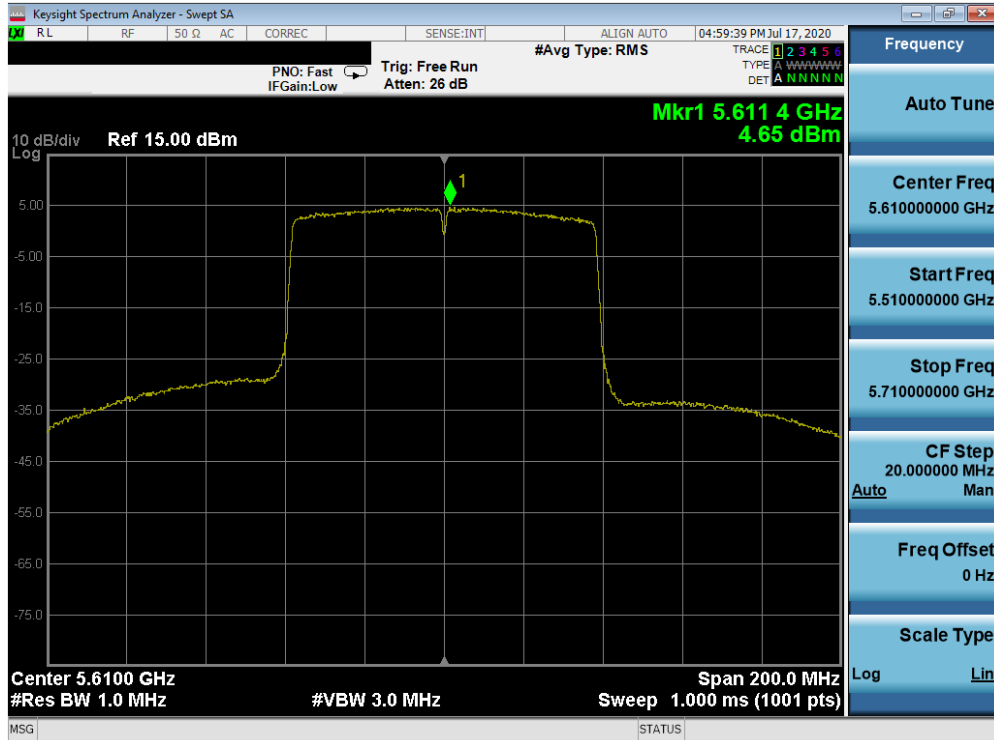


Plot 7-468. Power Spectral Density Plot ANT6 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

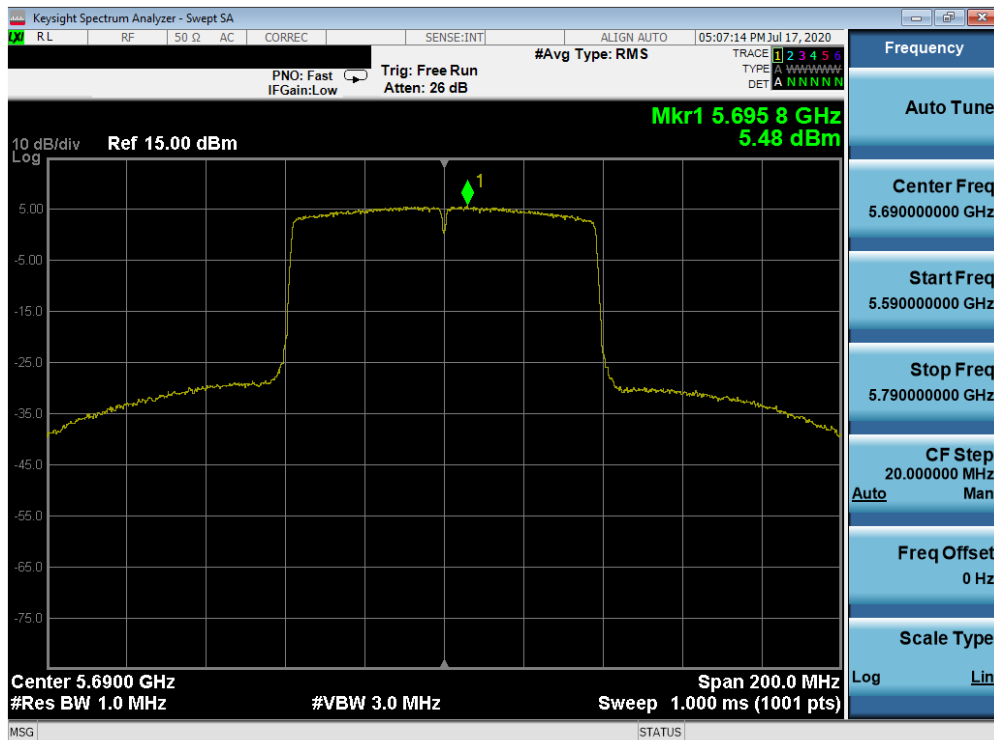


Plot 7-469. Power Spectral Density Plot ANT6 (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 269 of 344

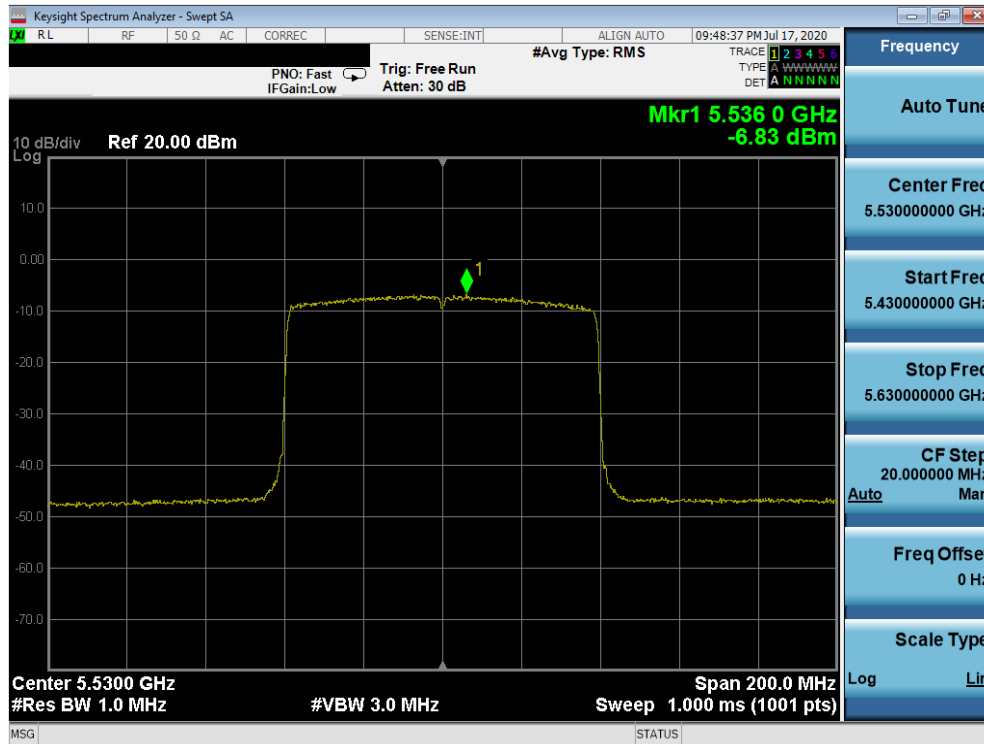


Plot 7-470. Power Spectral Density Plot ANT6 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 106)

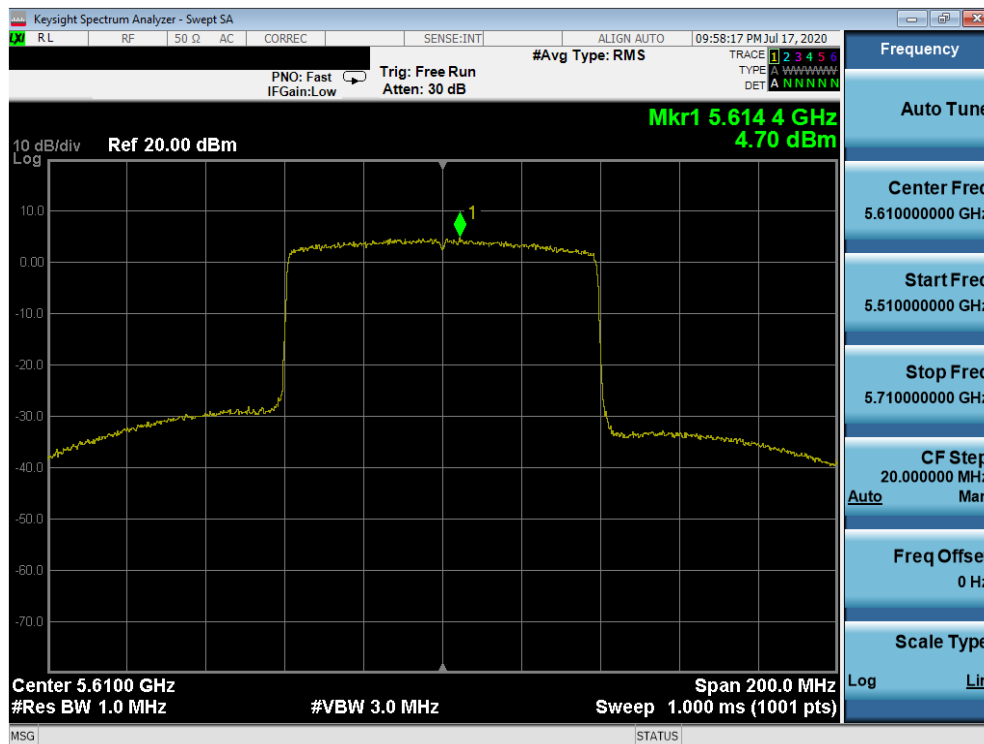

Plot 7-471. Power Spectral Density Plot ANT6 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 270 of 344

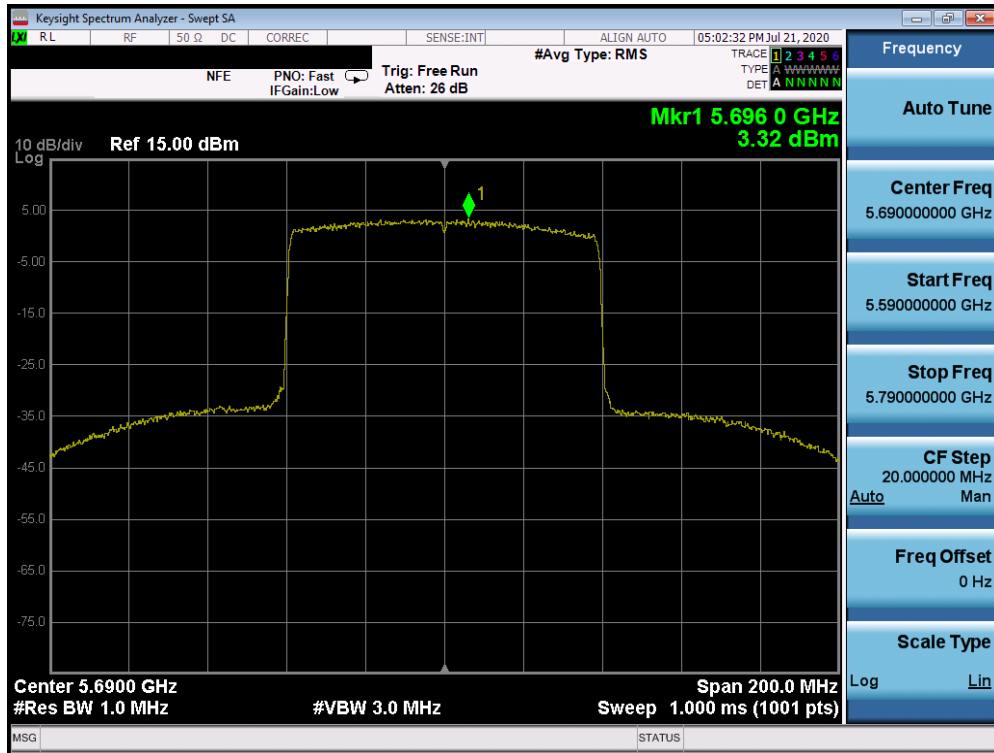


Plot 7-472. Power Spectral Density Plot ANT6 (80MHz BW 802.11ax (UNII Band 2C) – Ch. 138)


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenna-3 Power Density [dBm]	Antenna-4 Power Density [dBm]	Antenna-5 Power Density [dBm]	Antenna-6 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5210	42	ac (80+80MHz)	29.3/32.5 (MCS0)	-9.48	-9.62			-6.54	17.0	-23.54
Band 2A	5290	106	ac (80+80MHz)	29.3/32.5 (MCS0)			-9.82	-9.66	-6.73	11.0	-17.73
Band 2C	5530	42	ac (80+80MHz)	29.3/32.5 (MCS0)	-2.51	-3.63			-0.02	11.0	-11.02
	5610	106	ac (80+80MHz)	29.3/32.5 (MCS0)			-40.00	-6.94	-6.94	11.0	-17.94
Band 1	5210	42	ax (80+80MHz)	8/8.6 (MCS0)	-7.73	-9.02			-5.32	17.0	-22.32
Band 2A	5290	106	ax (80+80MHz)	8/8.6 (MCS0)			-9.59	-9.37	-6.47	11.0	-17.47
Band 2C	5530	42	ax (80+80MHz)	8/8.6 (MCS0)	-2.81	-2.32			0.45	11.0	-10.55
	5610	106	ax (80+80MHz)	8/8.6 (MCS0)			-3.70	-6.22	-1.77	11.0	-12.77

Table 7-23. Bands 1, 2A, 2C MIMO 80+80MHz Conducted Power Spectral Density Measurements

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 271 of 344

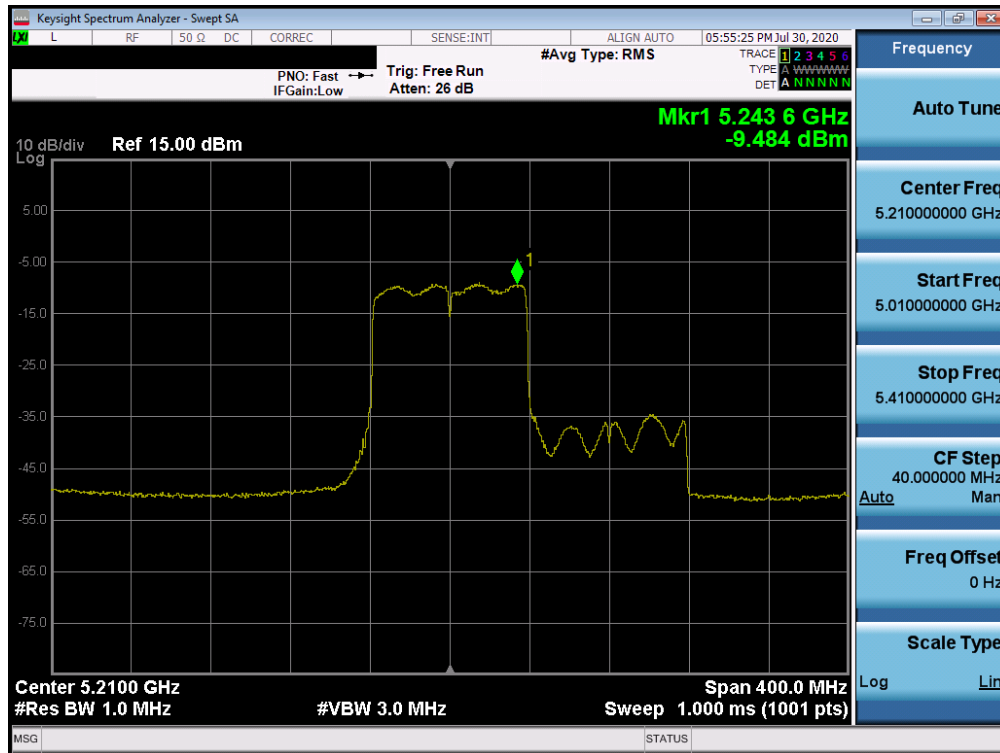


Plot 7-473. Power Spectral Density Plot SISO ANT3 (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

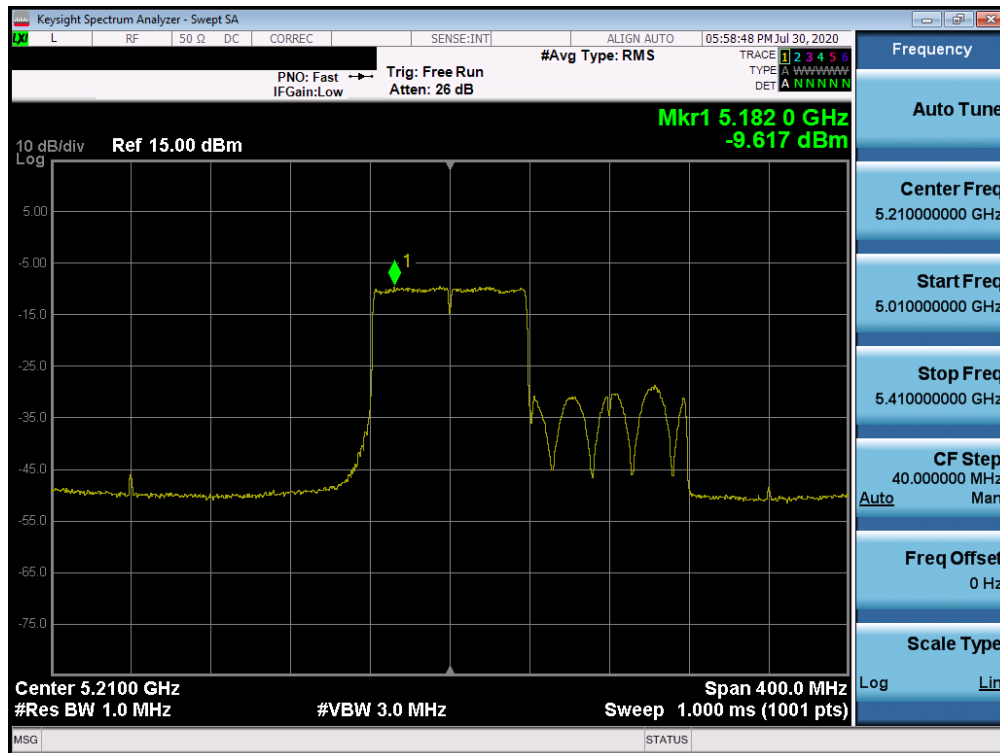


Plot 7-474. Power Spectral Density Plot SISO ANT4 (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 272 of 344

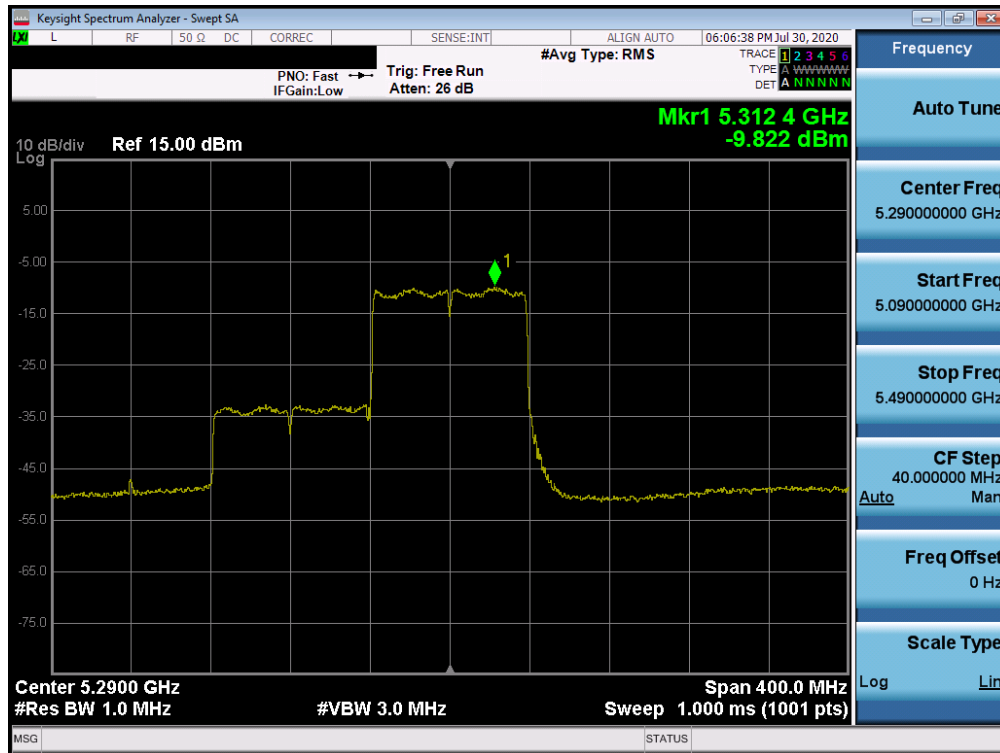


Plot 7-475. Power Spectral Density Plot SISO ANT5 (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

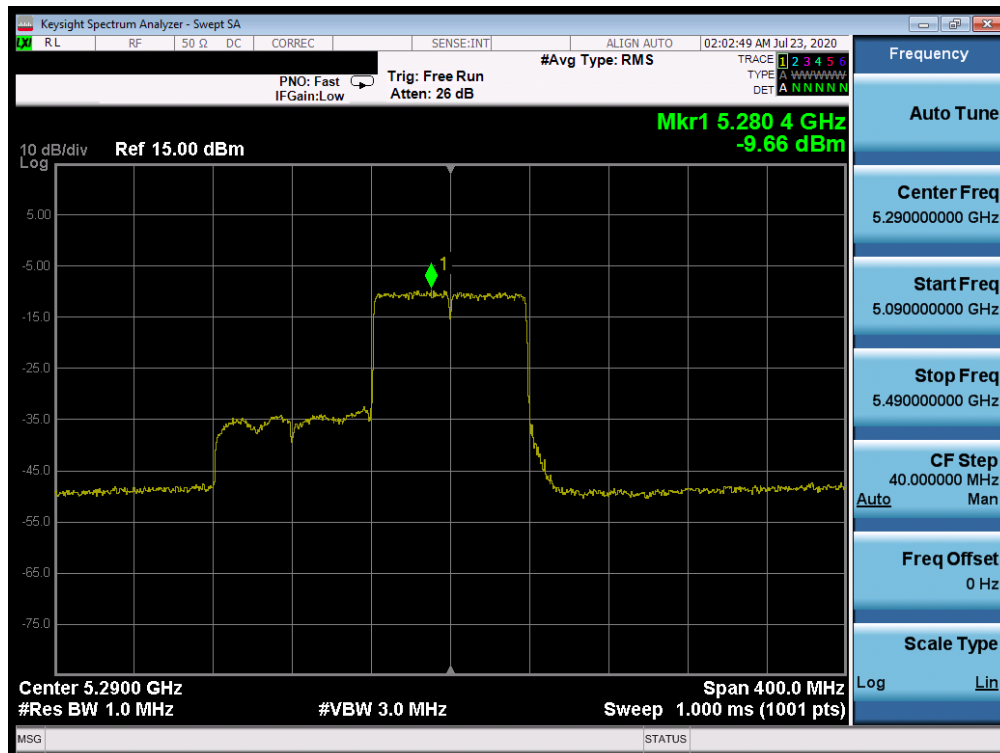


Plot 7-476. Power Spectral Density Plot SISO ANT6 (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 273 of 344

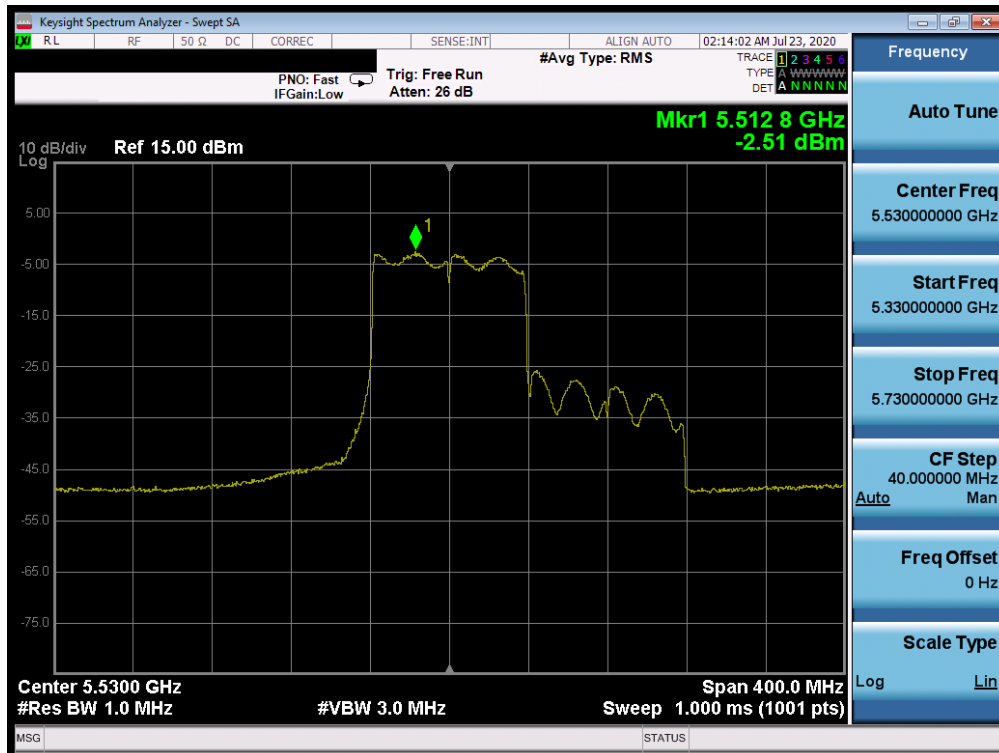


Plot 7-477. Power Spectral Density Plot SISO ANT3 (80MHz BW 802.11ac (UNII Band 1) – Ch. 106)

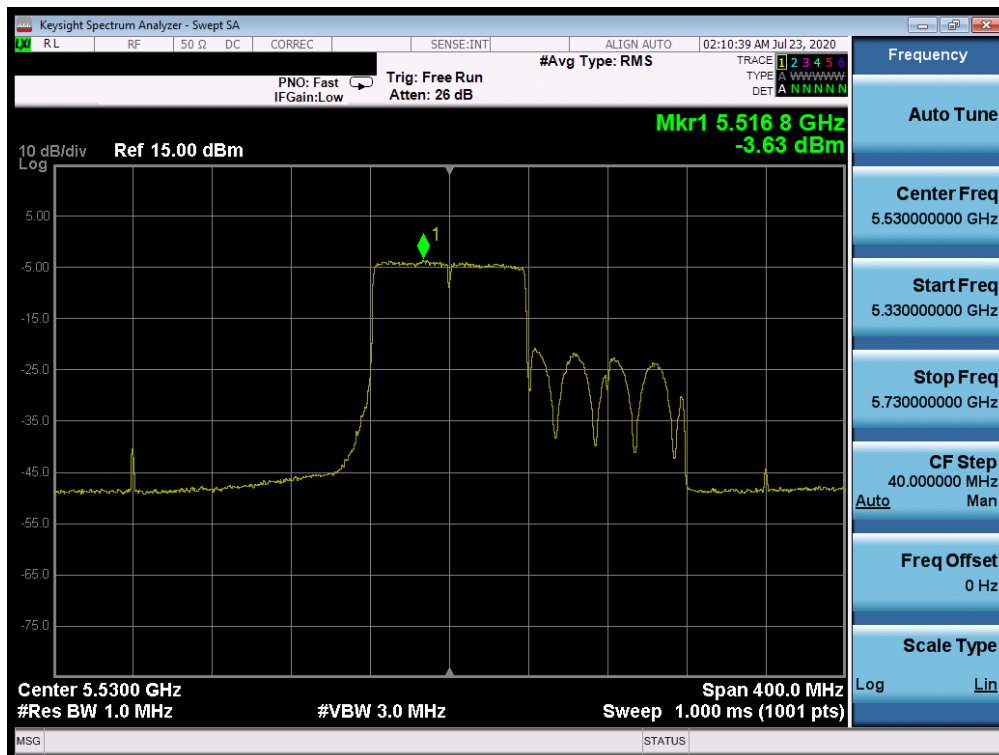


Plot 7-478. Power Spectral Density Plot SISO ANT4 (80MHz BW 802.11ac (UNII Band 1) – Ch. 106)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 274 of 344

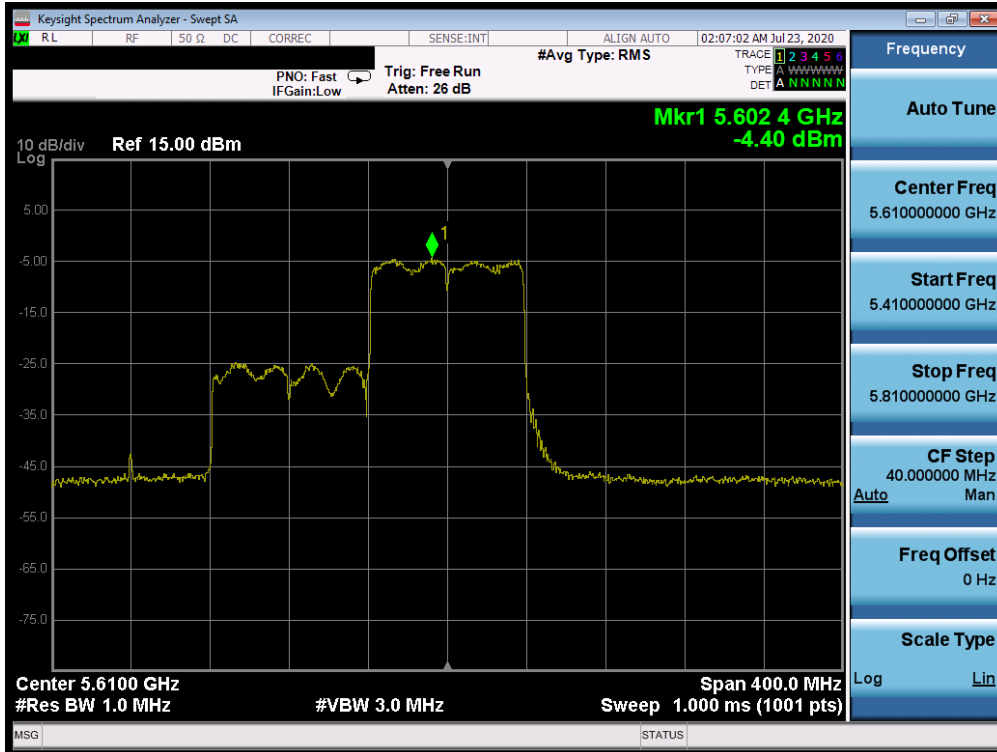


Plot 7-479. Power Spectral Density Plot SISO ANT5 (80MHz BW 802.11ac (UNII Band 2A) – Ch. 122)

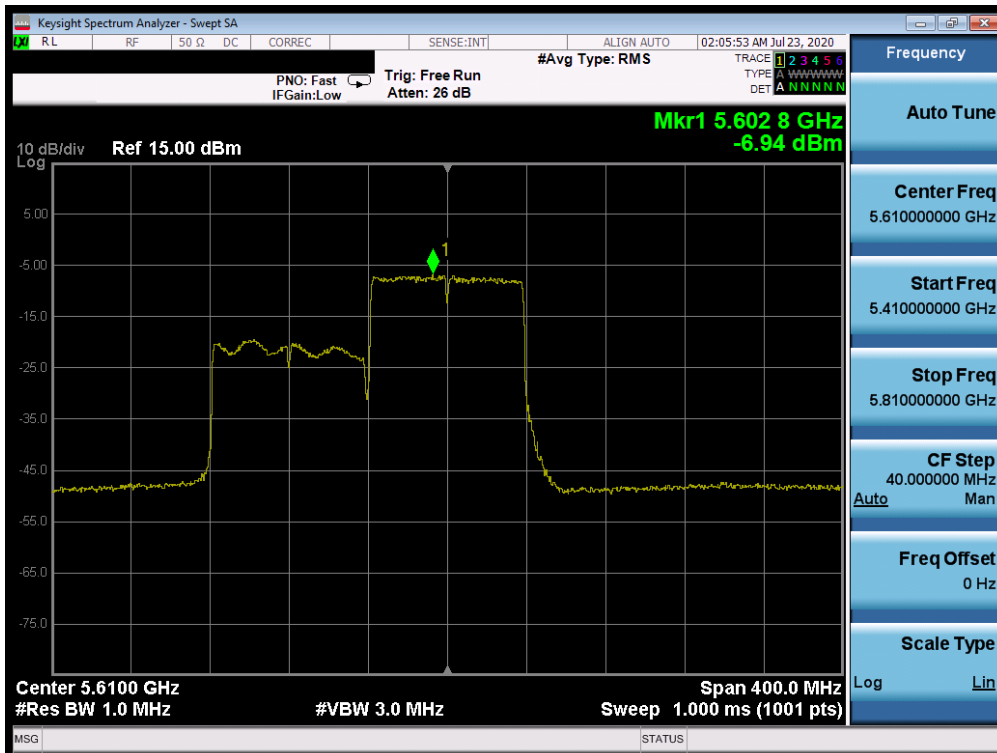


Plot 7-480. Power Spectral Density Plot SISO ANT6 (80MHz BW 802.11ac (UNII Band 2A) – Ch. 122)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 275 of 344

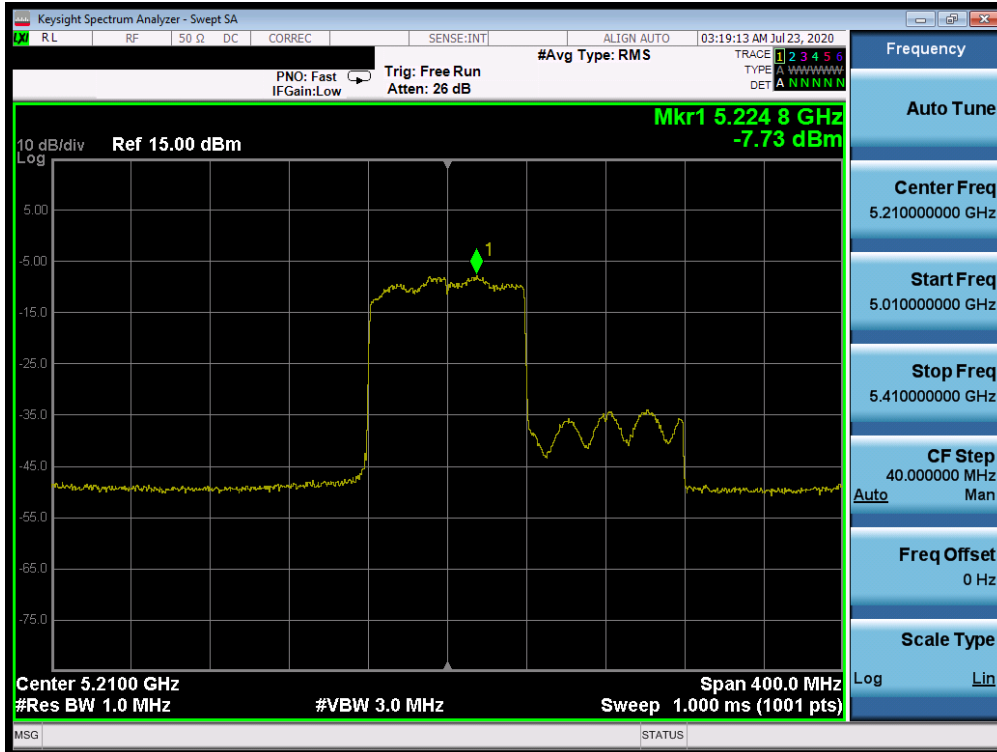

Plot 7-481. Power Spectral Density Plot SISO ANT3 (80MHz BW 802.11ax (UNII Band 1) – Ch. 42)

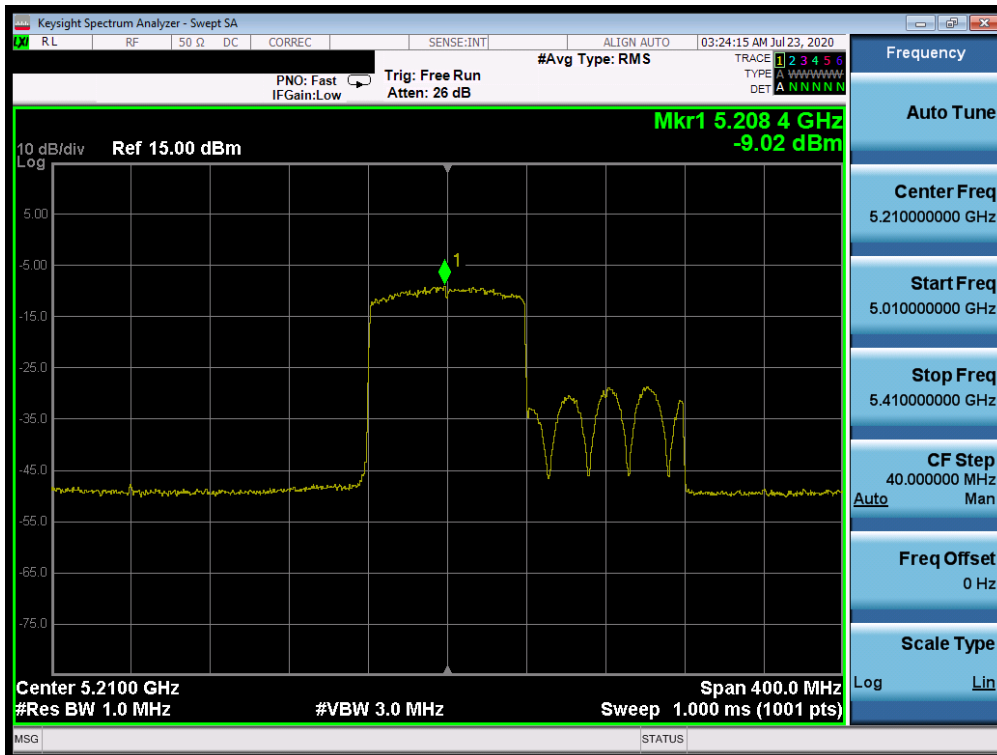

Plot 7-482. Power Spectral Density Plot SISO ANT4 (80MHz BW 802.11ax (UNII Band 1) – Ch. 42)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 276 of 344



Plot 7-483. Power Spectral Density Plot SISO ANT5 (80MHz BW 802.11ax (UNII Band 2A) – Ch. 58)




Plot 7-484. Power Spectral Density Plot SISO ANT6 (80MHz BW 802.11ax (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 277 of 344



Plot 7-485. Power Spectral Density Plot SISO ANT3 (80MHz BW 802.11ax (UNII Band 1) – Ch. 106)

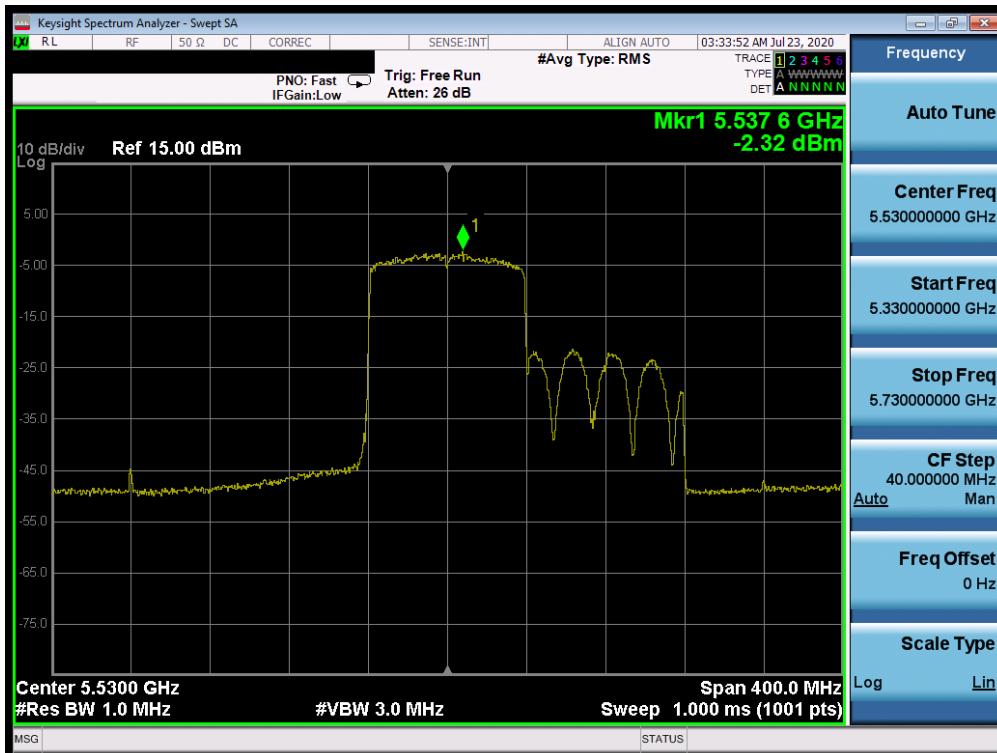


Plot 7-486. Power Spectral Density Plot SISO ANT4 (80MHz BW 802.11ax (UNII Band 1) – Ch. 106)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 278 of 344



Plot 7-487. Power Spectral Density Plot SISO ANT5 (80MHz BW 802.11ax (UNII Band 2A) – Ch. 122)

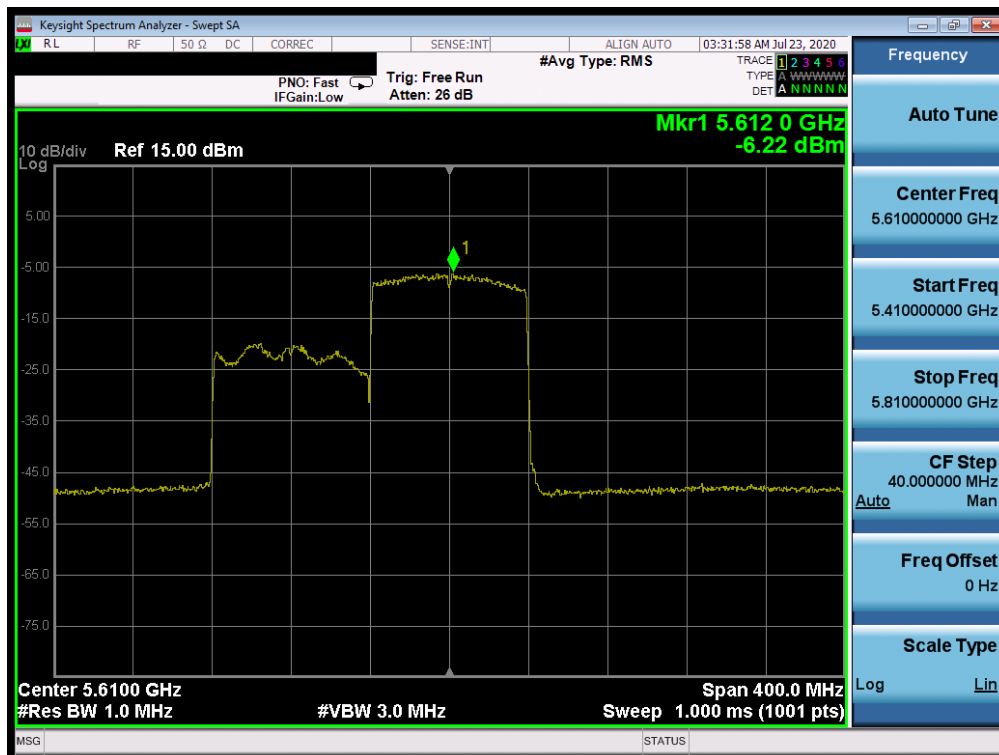

Plot 7-488. Power Spectral Density Plot SISO ANT6 (80MHz BW 802.11ax (UNII Band 2A) – Ch. 122)


FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 279 of 344

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenna-3 Power Density [dBm]	Antenna-4 Power Density [dBm]	Antenna-5 Power Density [dBm]	Antenna-6 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
Band 3	5745	149	a	6	11.54	11.43	11.84	12.21	17.79	30.0	-12.21
	5785	157	a	6	12.16	12.17	12.74	12.54	18.43	30.0	-11.57
	5825	165	a	6	11.58	12.12	12.64	11.88	18.09	30.0	-11.91
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	13.12	13.02	12.67	11.78	18.70	30.0	-11.30
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	12.68	12.98	12.07	11.23	18.31	30.0	-11.69
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	12.43	12.98	12.44	11.84	18.46	30.0	-11.54
	5745	149	ax (20MHz)	8/8.6 (MCS0)	12.68	13.32	12.08	11.79	18.53	30.0	-11.47
	5785	157	ax (20MHz)	8/8.6 (MCS0)	12.32	12.97	11.98	11.42	18.23	30.0	-11.77
	5825	165	ax (20MHz)	8/8.6 (MCS0)	12.65	13.04	12.34	12.20	18.59	30.0	-11.41
	5755	151	n (40MHz)	13.5/15 (MCS0)	8.93	8.42	9.04	8.84	14.83	30.0	-15.17
	5795	159	n (40MHz)	13.5/15 (MCS0)	9.97	10.62	9.30	8.64	15.72	30.0	-14.28
	5755	151	ax (40MHz)	8/8.6 (MCS0)	10.68	10.16	10.86	11.28	16.78	30.0	-13.22
	5795	159	ax (40MHz)	8/8.6 (MCS0)	10.15	10.54	9.27	8.63	15.73	30.0	-14.27
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	6.16	6.91	5.82	4.88	12.02	30.0	-17.98
	5775	155	ax (80MHz)	8/8.6 (MCS0)	6.78	7.38	6.13	5.51	12.53	30.0	-17.47


Table 7-24. Band 3 MIMO Conducted Power Spectral Density Measurements

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 280 of 344	

Antenna-3 Power Spectral Density Measurements

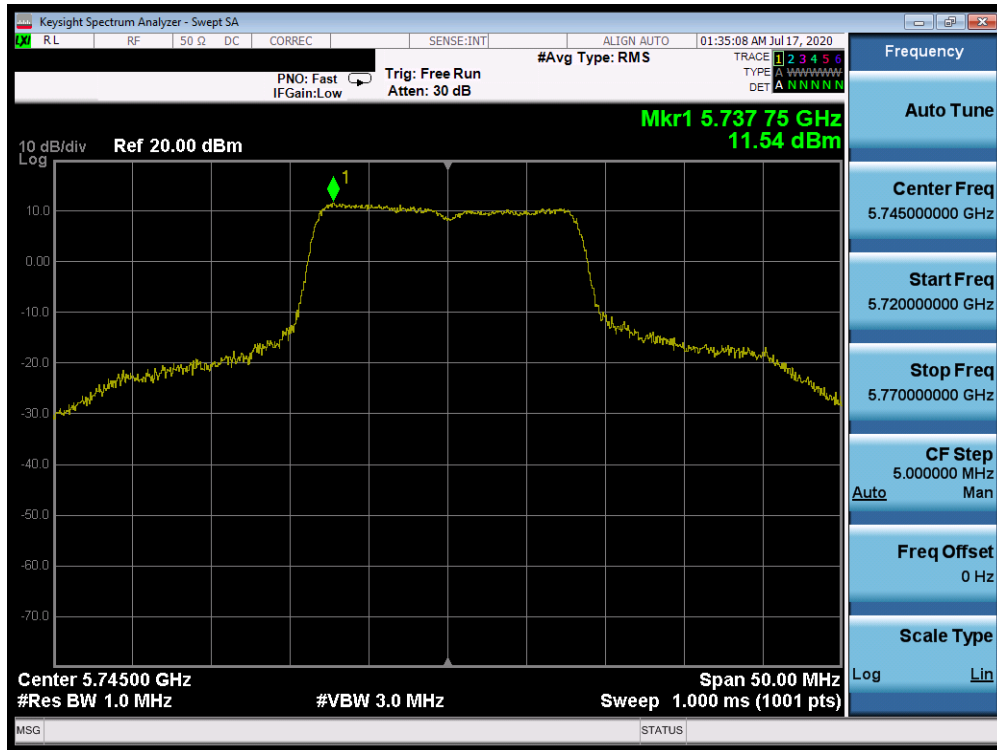


Plot 7-489. Power Spectral Density Plot ANT3 (802.11a (UNII Band 3) – Ch. 149)

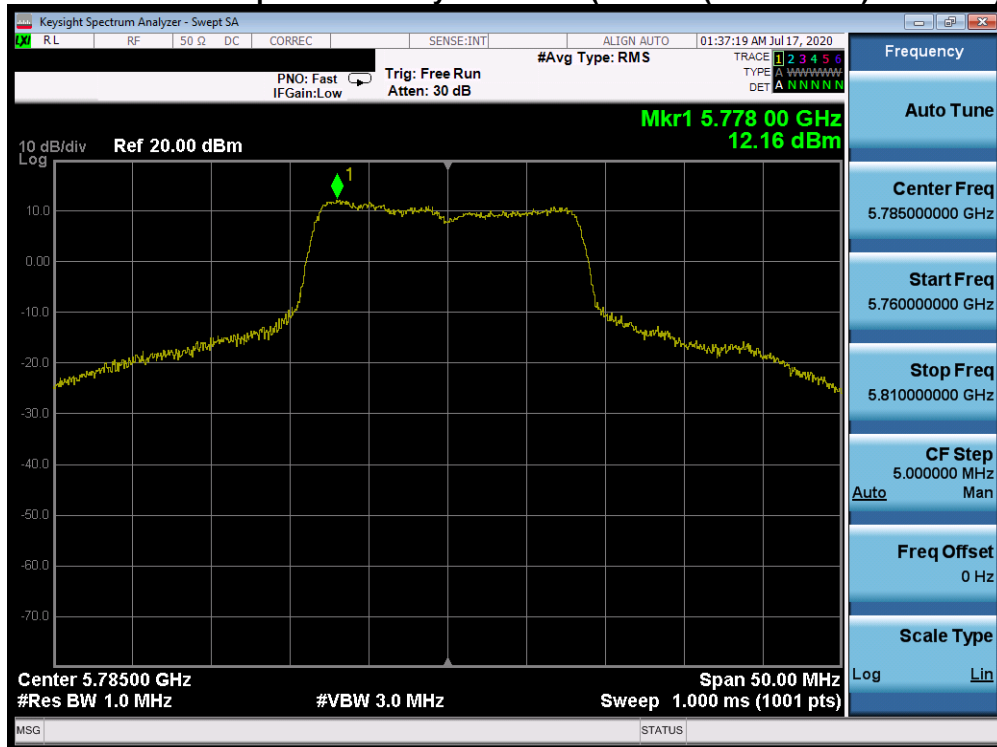


Plot 7-490. Power Spectral Density Plot ANT3 (802.11a (UNII Band 3) – Ch. 157)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 281 of 344

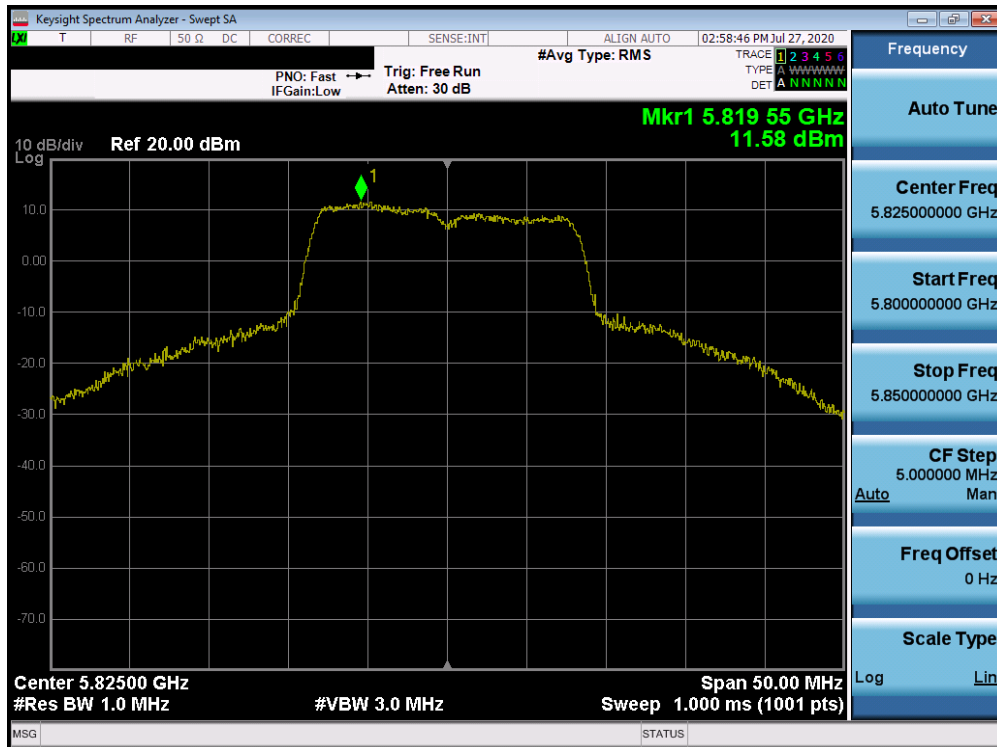


Plot 7-491. Power Spectral Density Plot ANT3 (802.11a (UNII Band 3) – Ch. 165)

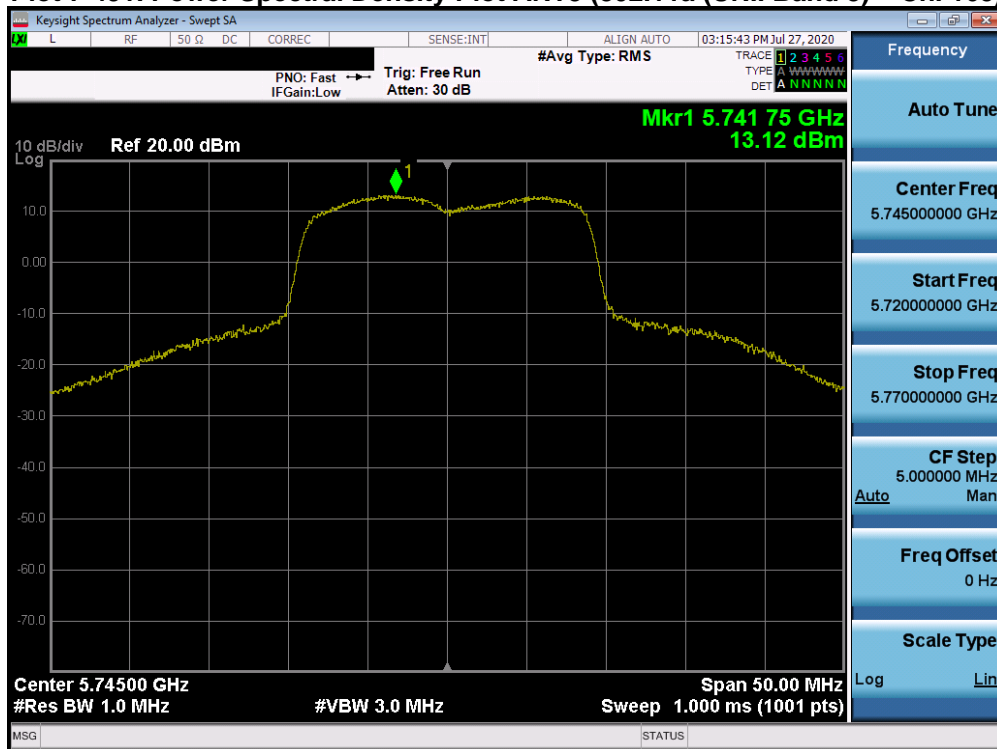


Plot 7-492. Power Spectral Density Plot ANT3 (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 282 of 344

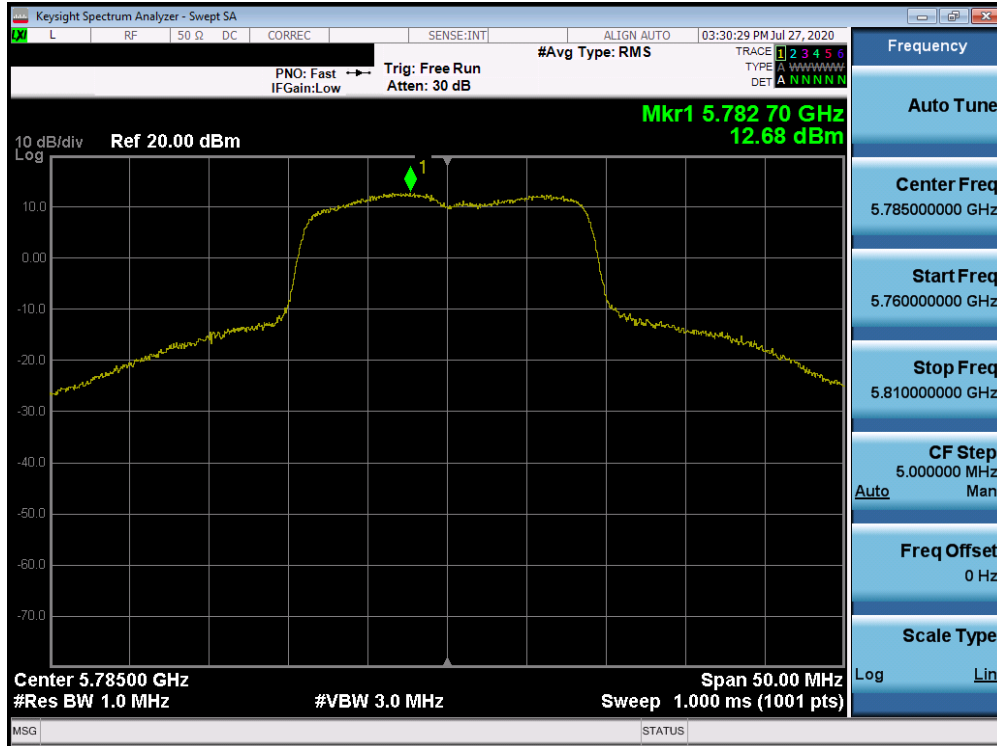


Plot 7-493. Power Spectral Density Plot ANT3 (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

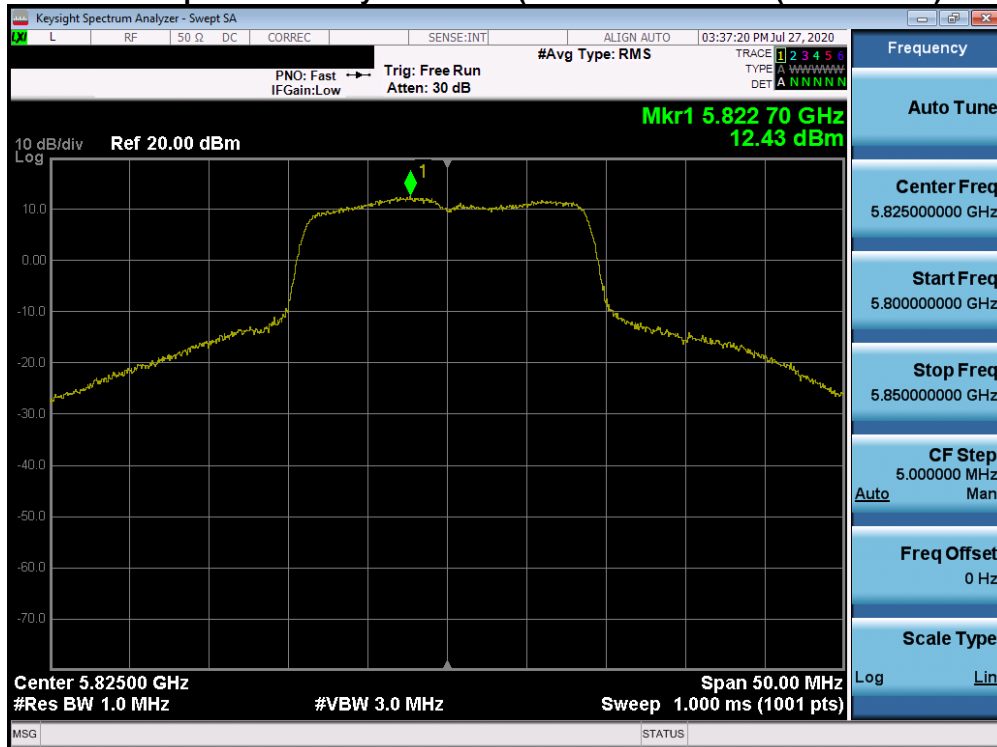


Plot 7-494. Power Spectral Density Plot ANT3 (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 283 of 344

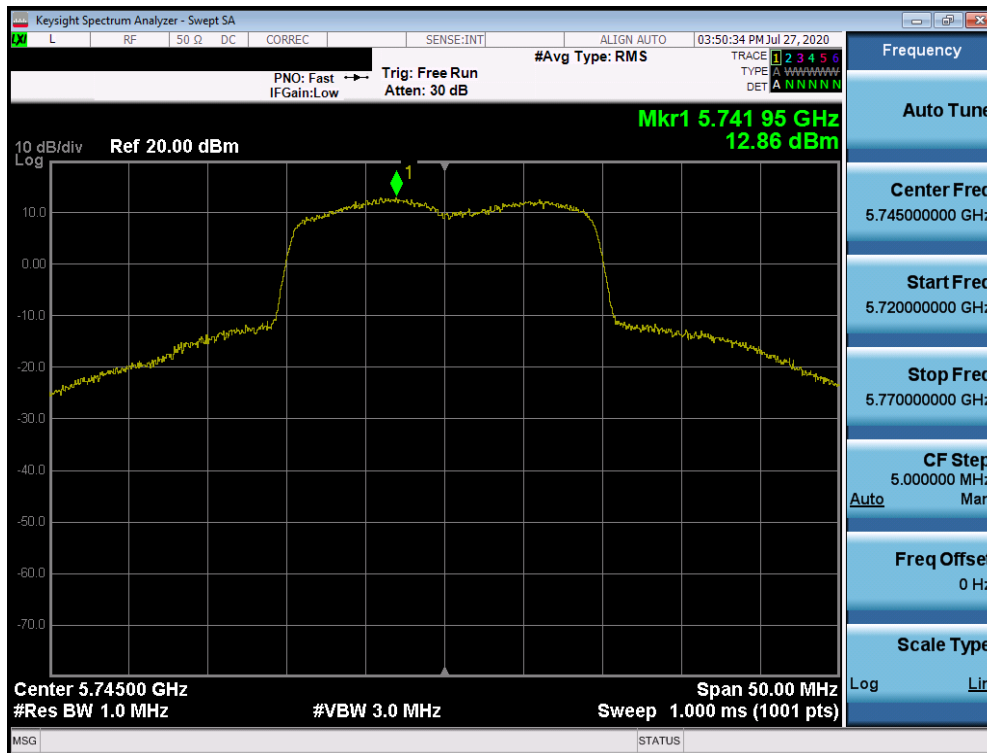


Plot 7-495. Power Spectral Density Plot ANT3 (20MHz BW 802.11ax (UNII Band 3) – Ch. 149)

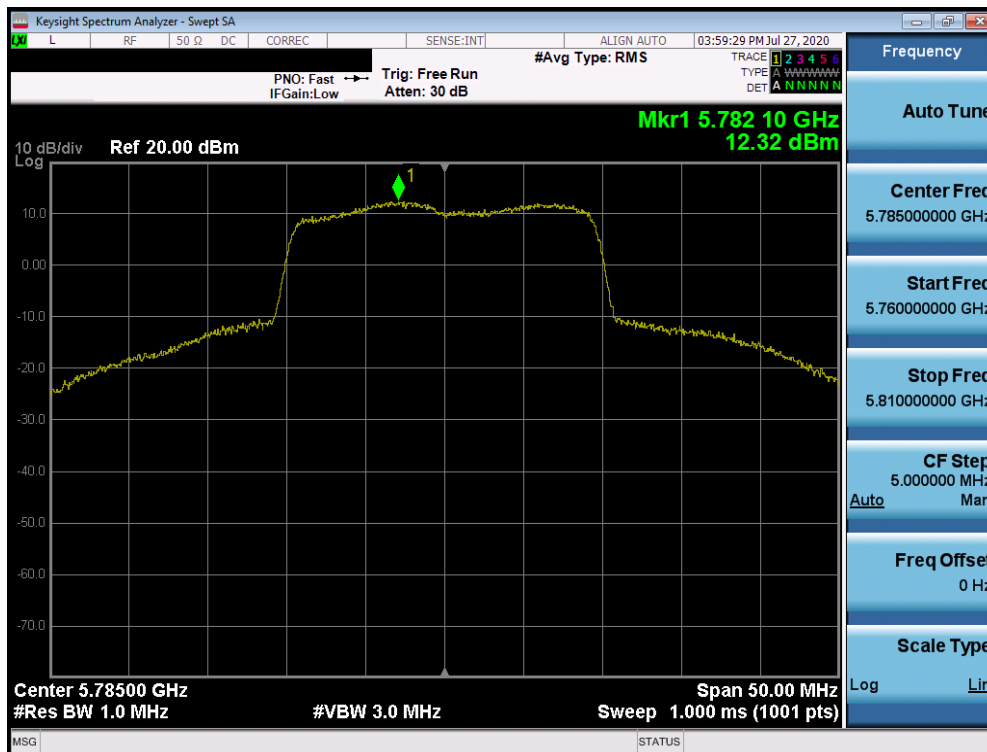


Plot 7-496. Power Spectral Density Plot ANT3 (20MHz BW 802.11ax (UNII Band 3) – Ch. 157)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 284 of 344

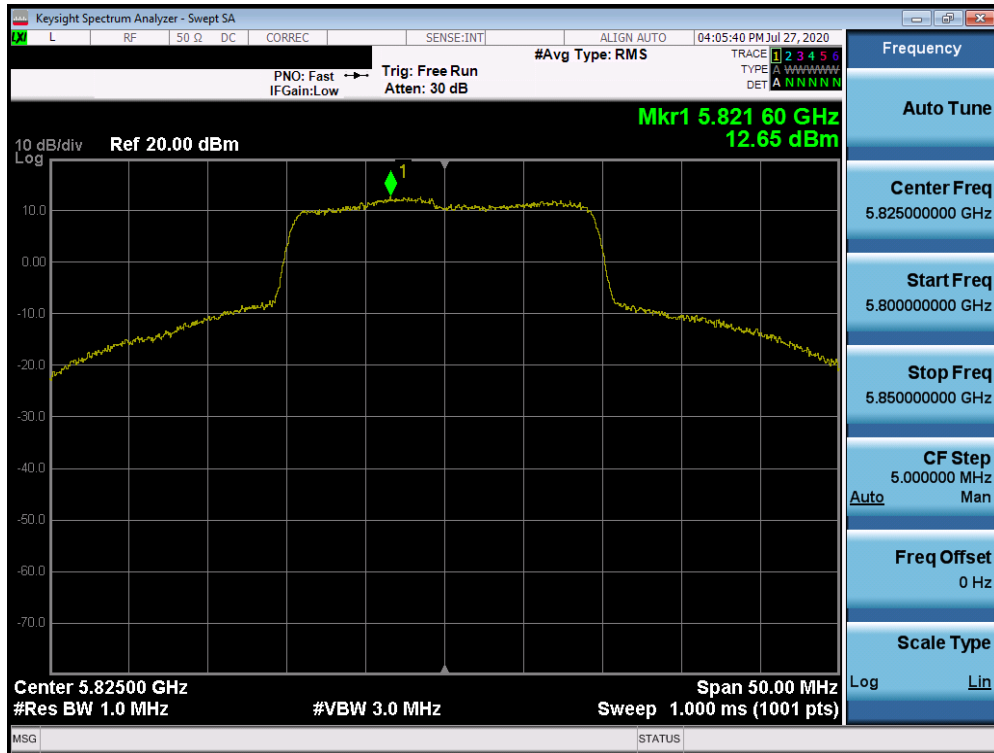


Plot 7-497. Power Spectral Density Plot ANT3 (20MHz BW 802.11ax (UNII Band 3) – Ch. 165)

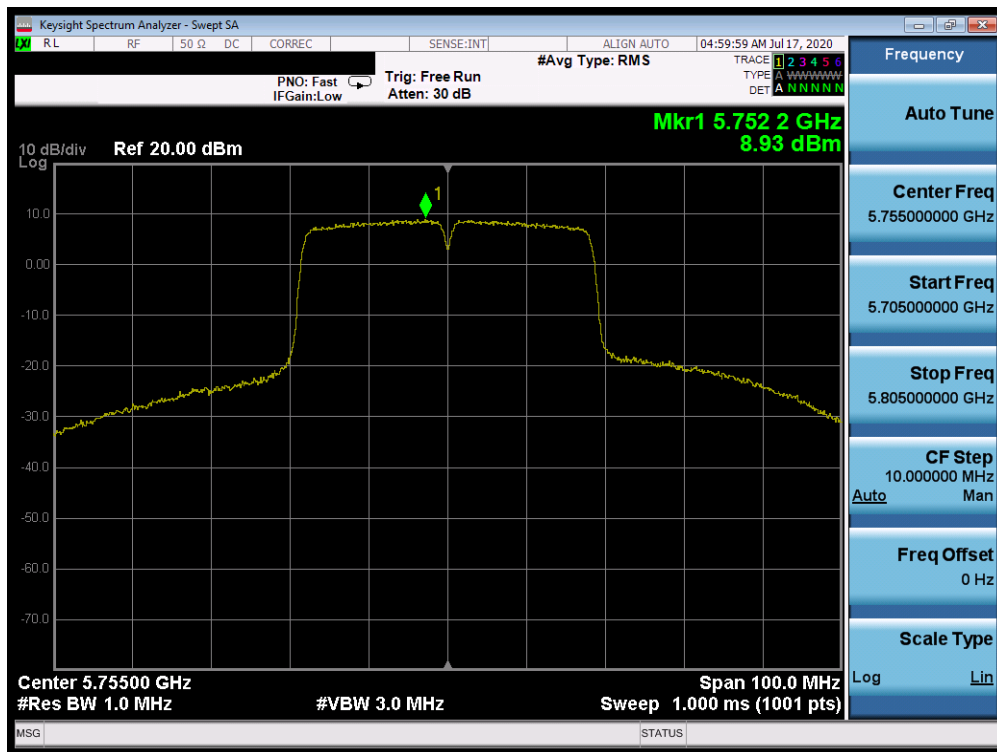


Plot 7-498. Power Spectral Density Plot ANT3 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 285 of 344

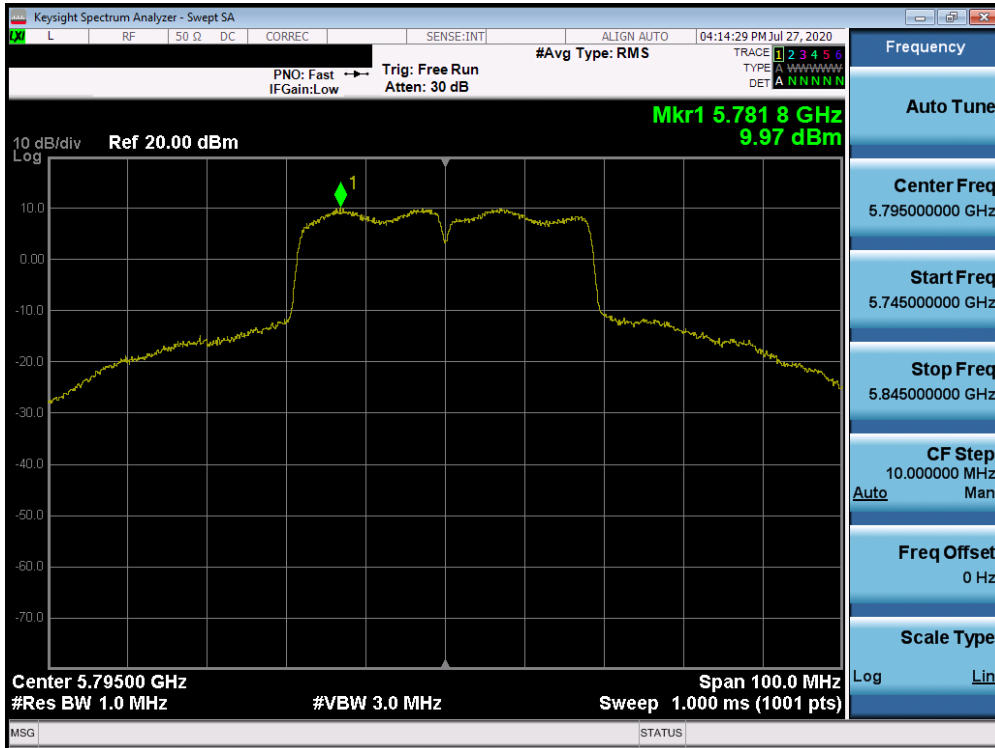


Plot 7-499. Power Spectral Density Plot ANT3 (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

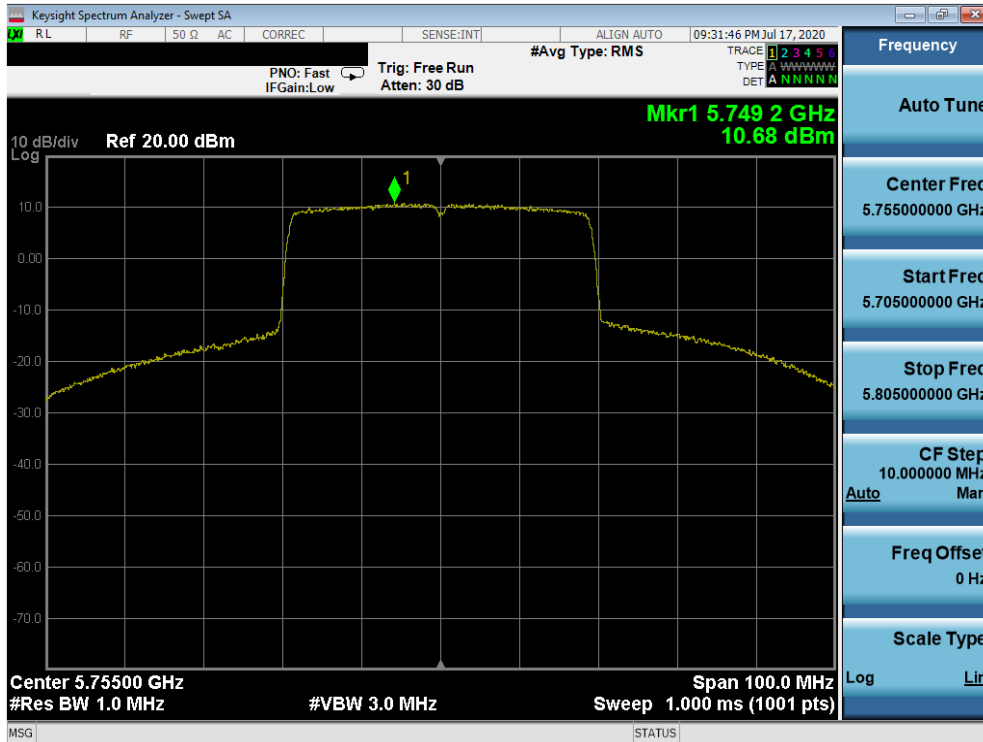


Plot 7-500. Power Spectral Density Plot ANT3 (40MHz BW 802.11ax (UNII Band 3) – Ch. 151)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 286 of 344

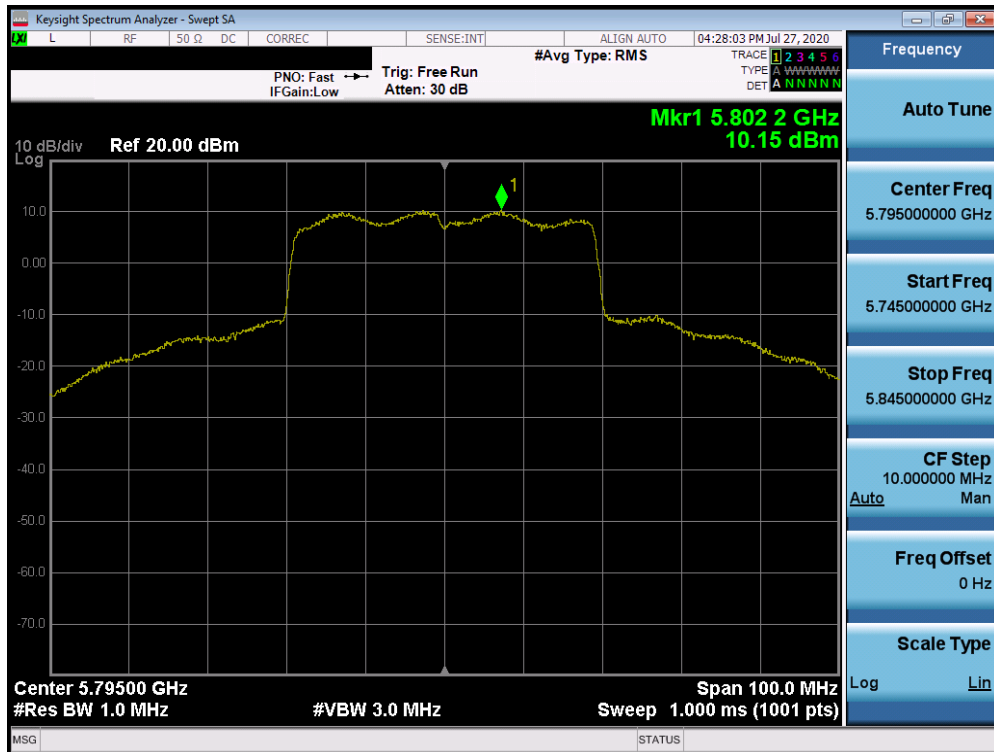


Plot 7-501. Power Spectral Density Plot ANT3 (40MHz BW 802.11ax (UNII Band 3) – Ch. 159)

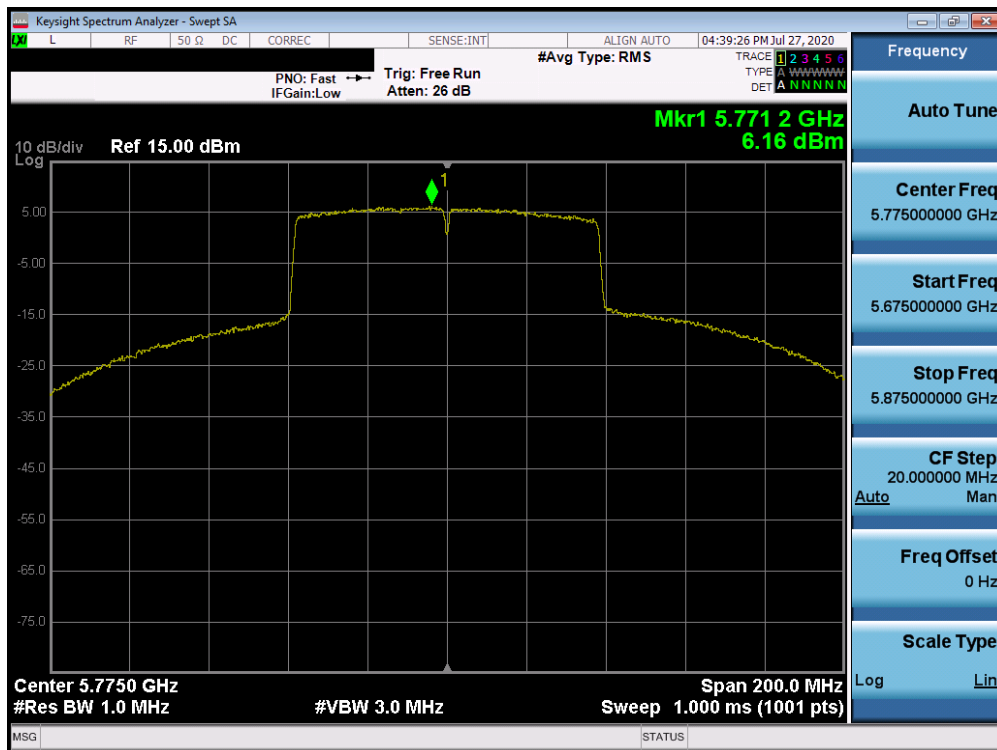


Plot 7-502. Power Spectral Density Plot ANT3 (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 287 of 344

Antenna-4 Power Spectral Density Measurements

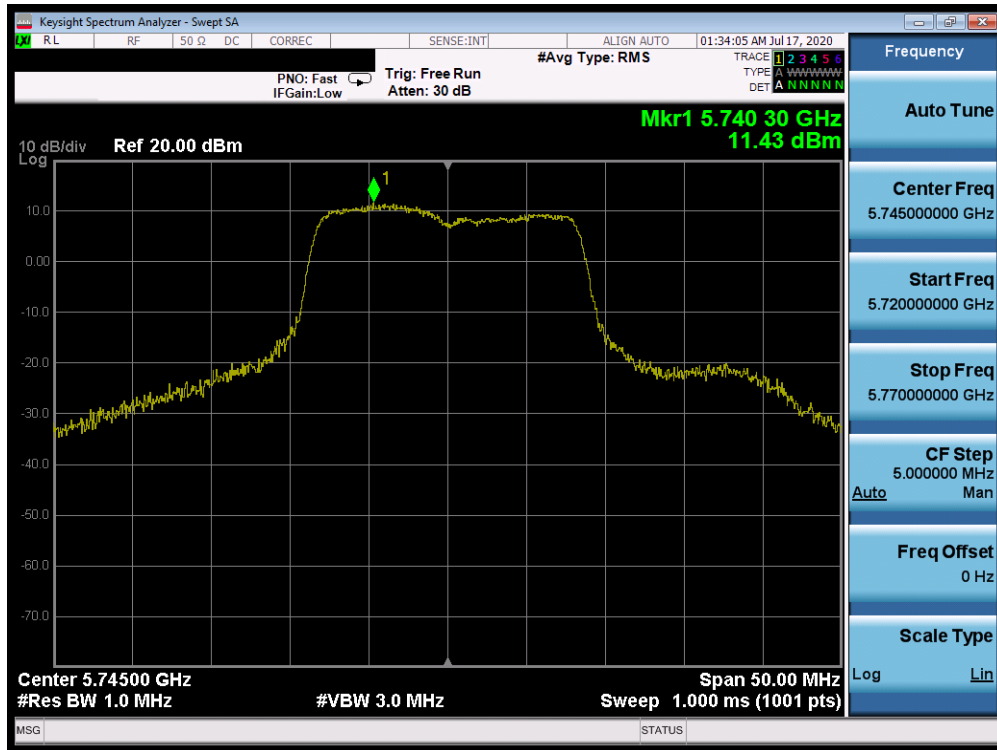


Plot 7-504. Power Spectral Density Plot ANT4 (802.11a (UNII Band 3) – Ch. 149)

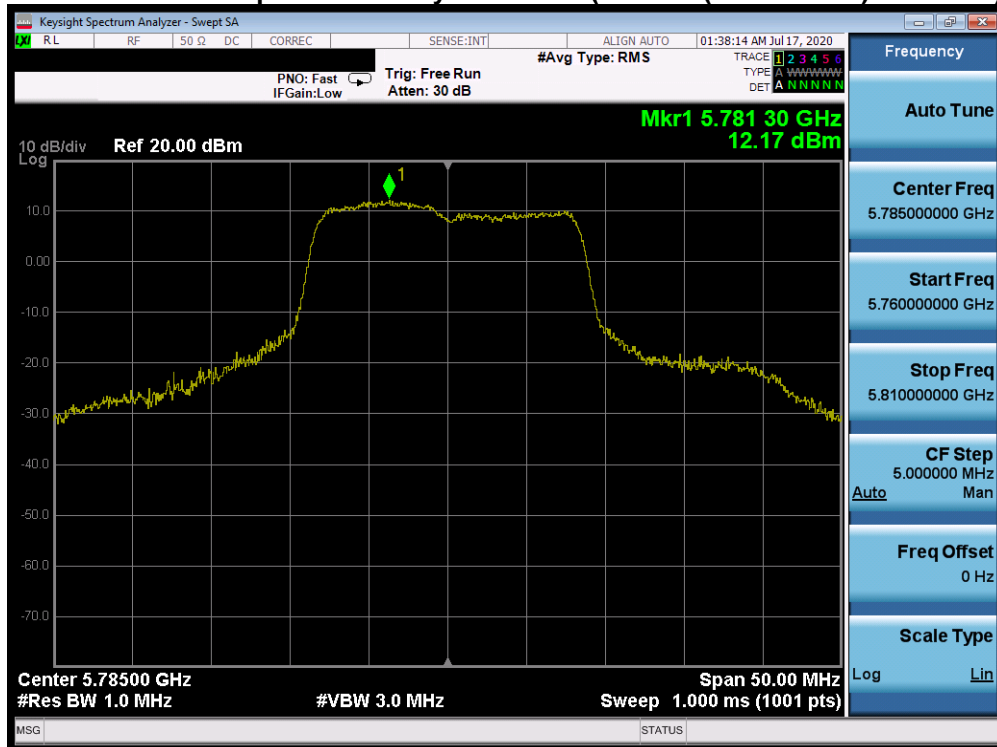


Plot 7-505. Power Spectral Density Plot ANT4 (802.11a (UNII Band 3) – Ch. 157)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 289 of 344

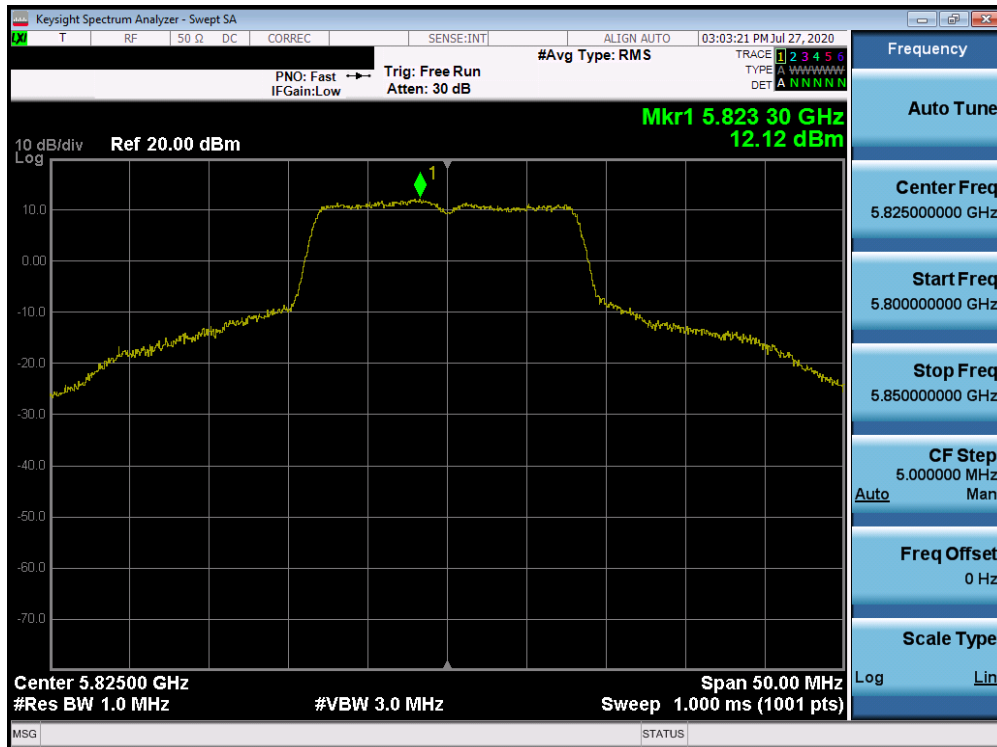


Plot 7-506. Power Spectral Density Plot ANT4 (802.11a (UNII Band 3) – Ch. 165)

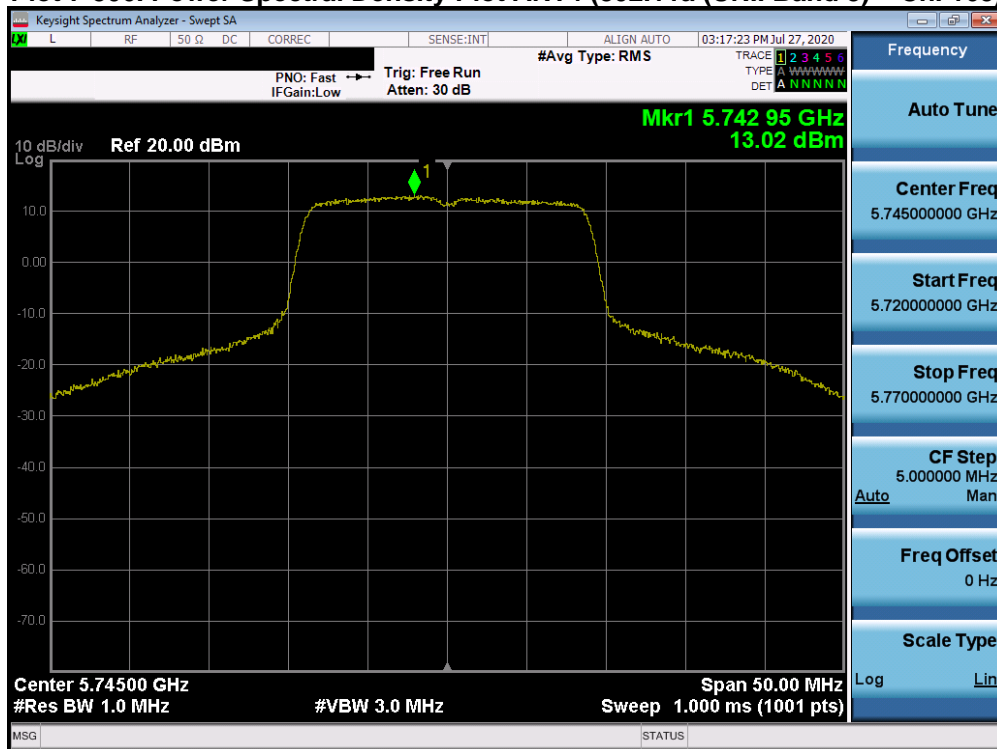


Plot 7-507. Power Spectral Density Plot ANT4 (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 290 of 344

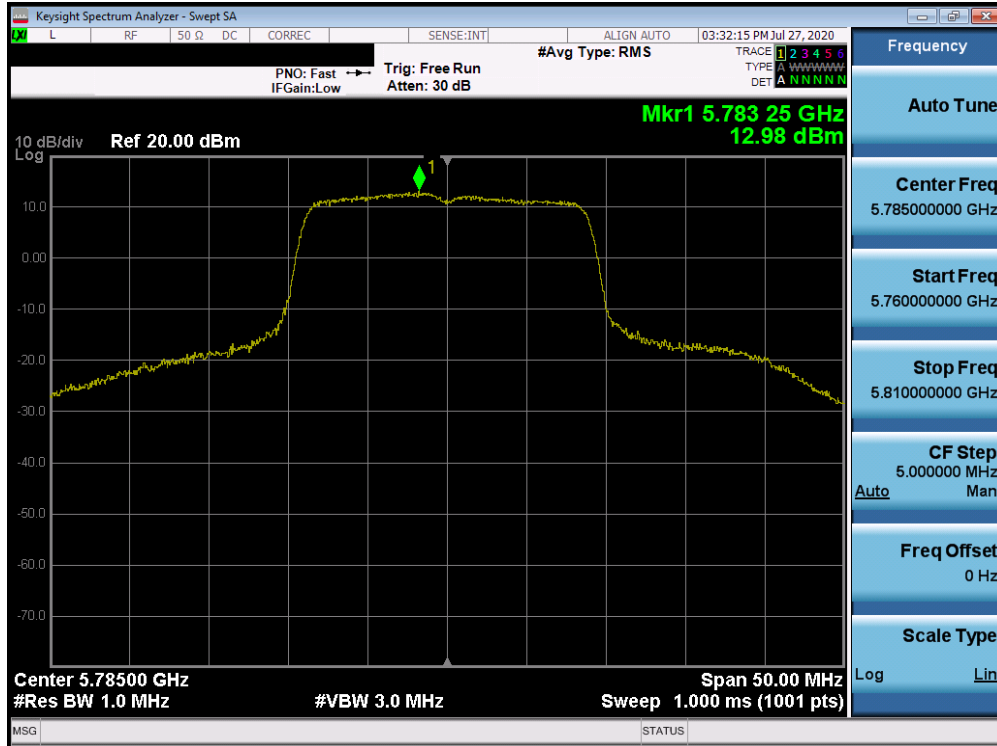


Plot 7-508. Power Spectral Density Plot ANT4 (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

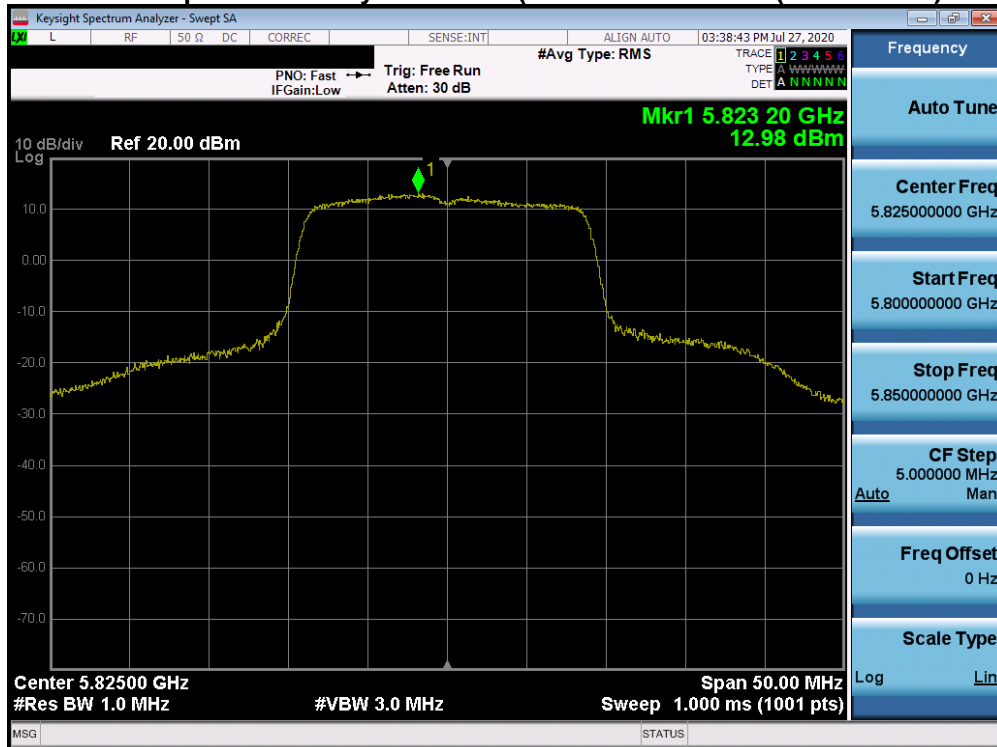


Plot 7-509. Power Spectral Density Plot ANT4 (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 291 of 344

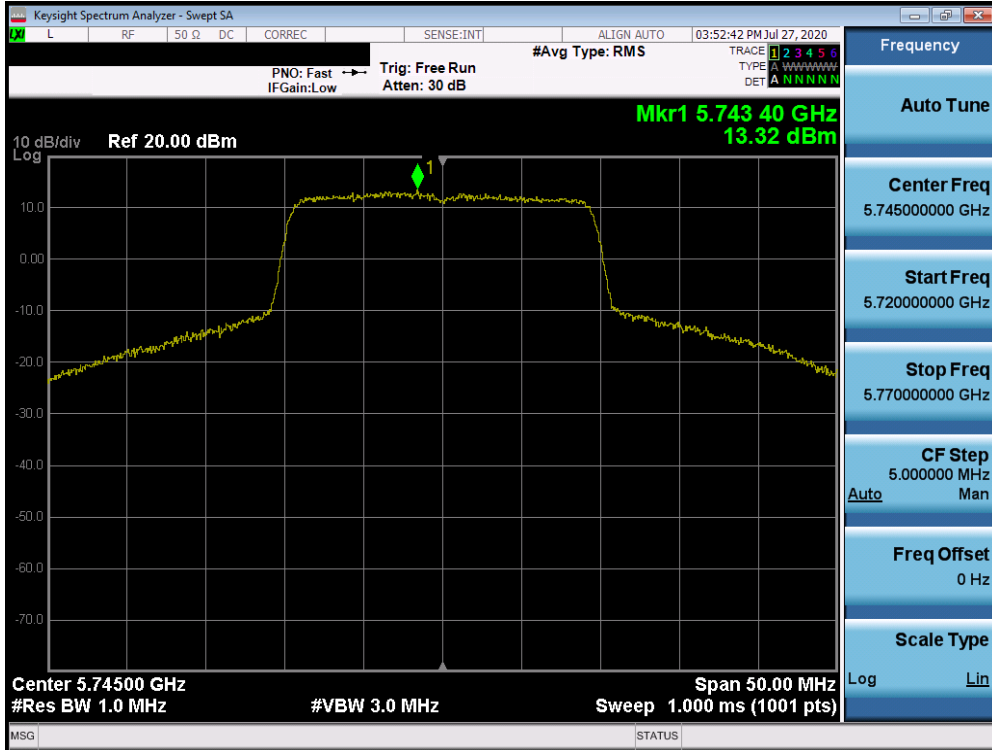


Plot 7-510. Power Spectral Density Plot ANT4 (20MHz BW 802.11ax (UNII Band 3) – Ch. 149)

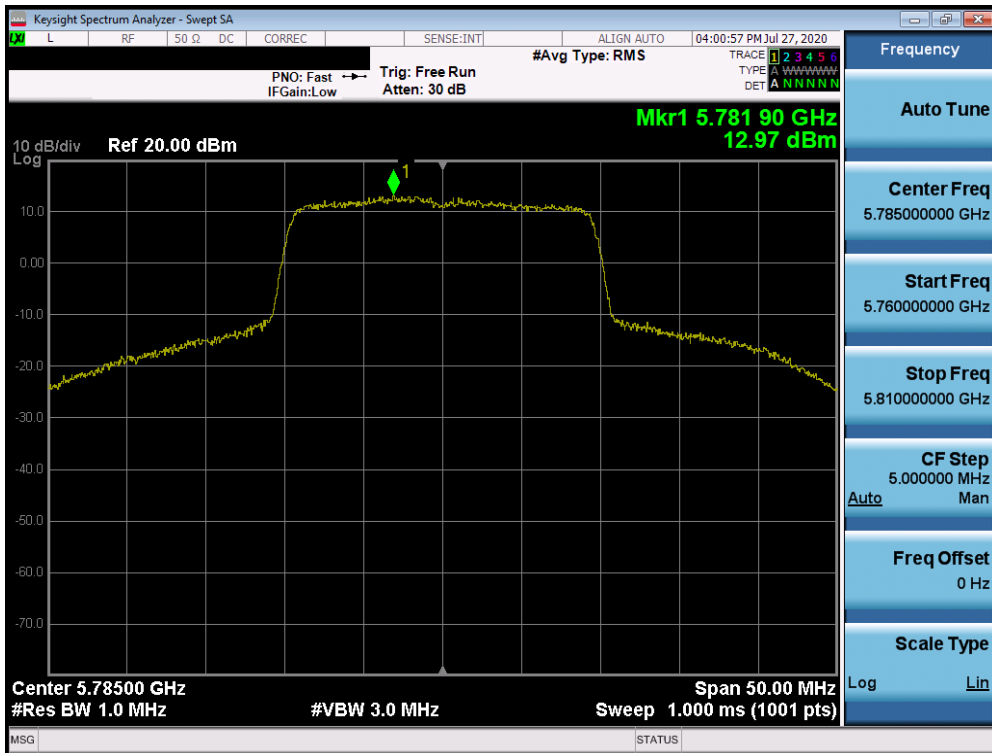


Plot 7-511. Power Spectral Density Plot ANT4 (20MHz BW 802.11ax (UNII Band 3) – Ch. 157)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 292 of 344

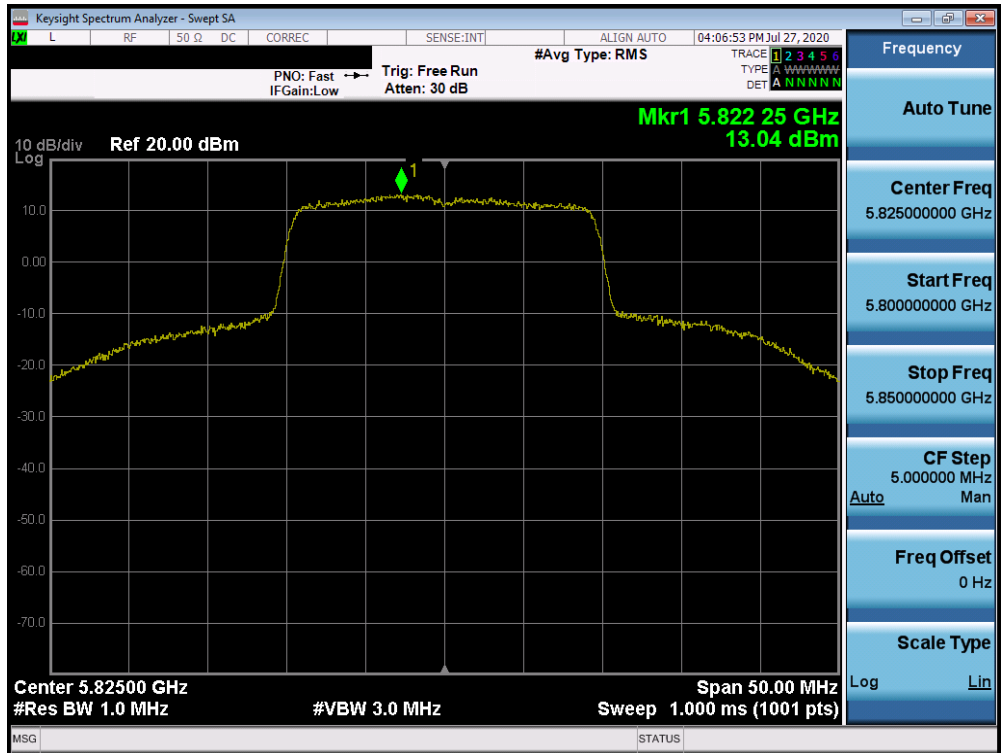


Plot 7-512. Power Spectral Density Plot ANT4 (20MHz BW 802.11ax (UNII Band 3) – Ch. 165)

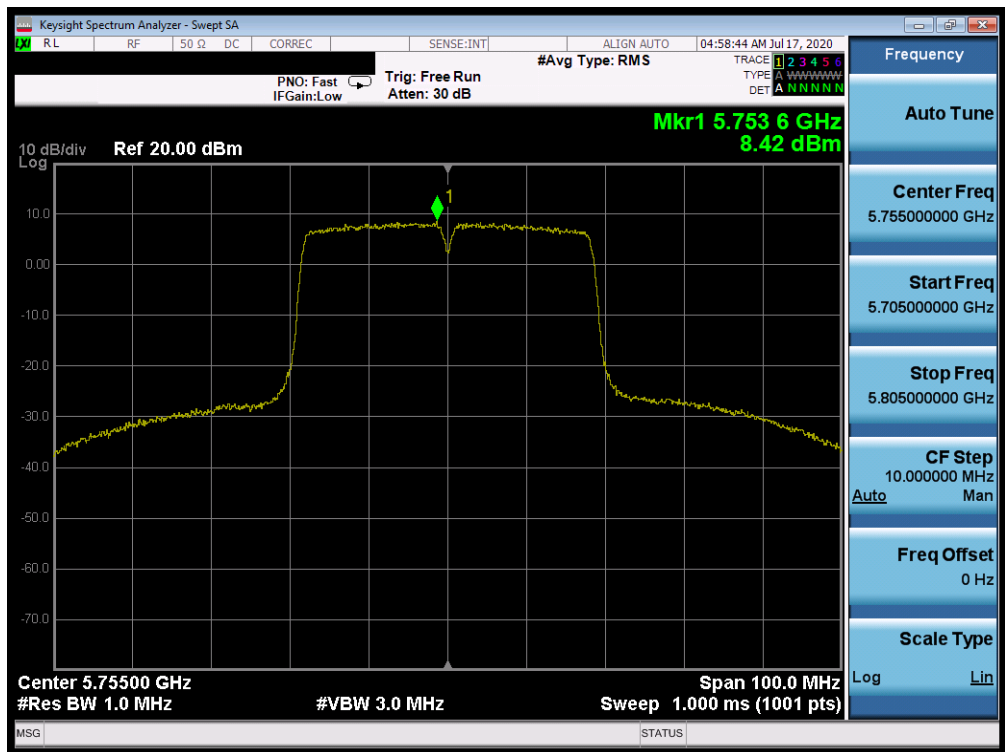


Plot 7-513. Power Spectral Density Plot ANT4 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 293 of 344

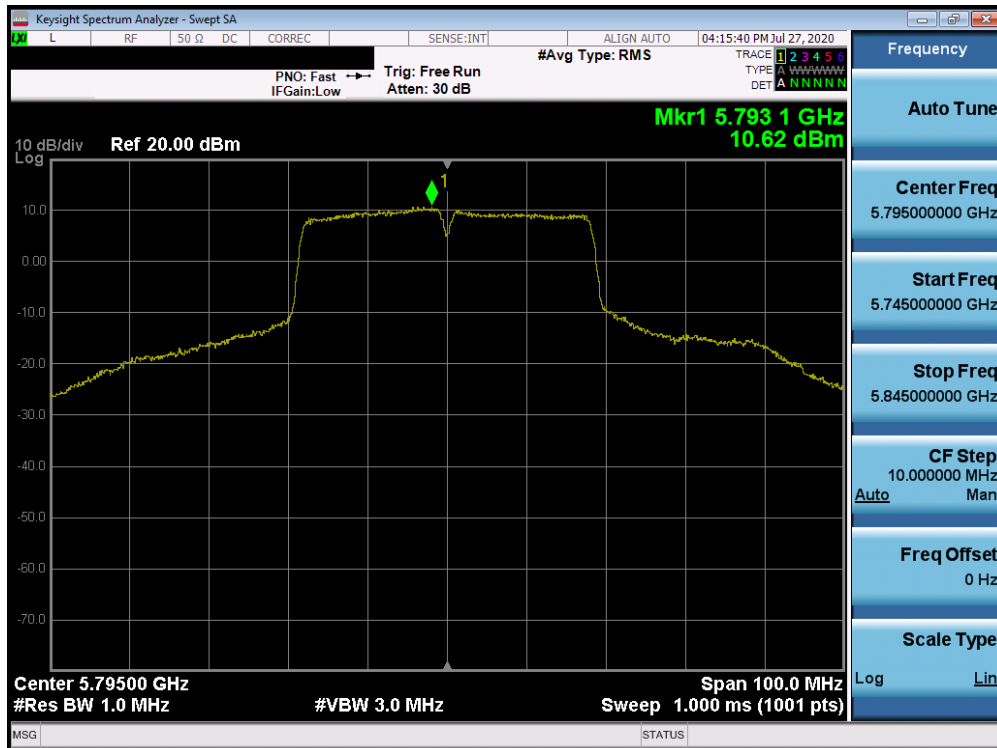


Plot 7-514. Power Spectral Density Plot ANT4 (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

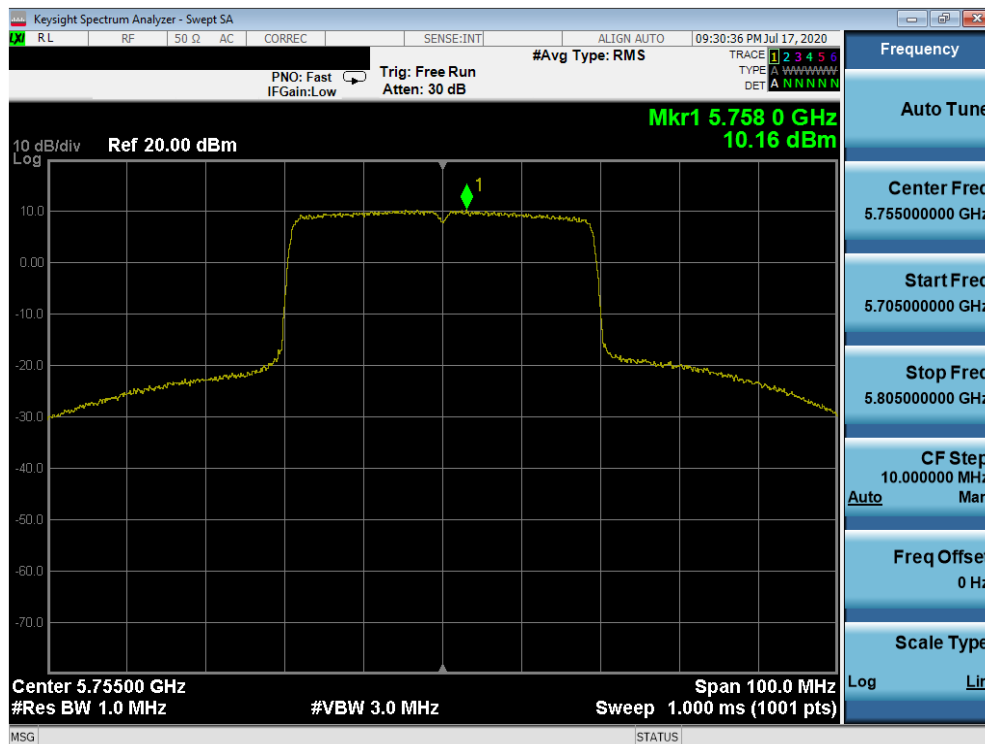


Plot 7-515. Power Spectral Density Plot ANT4 (40MHz BW 802.11ax (UNII Band 3) – Ch. 151)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 294 of 344

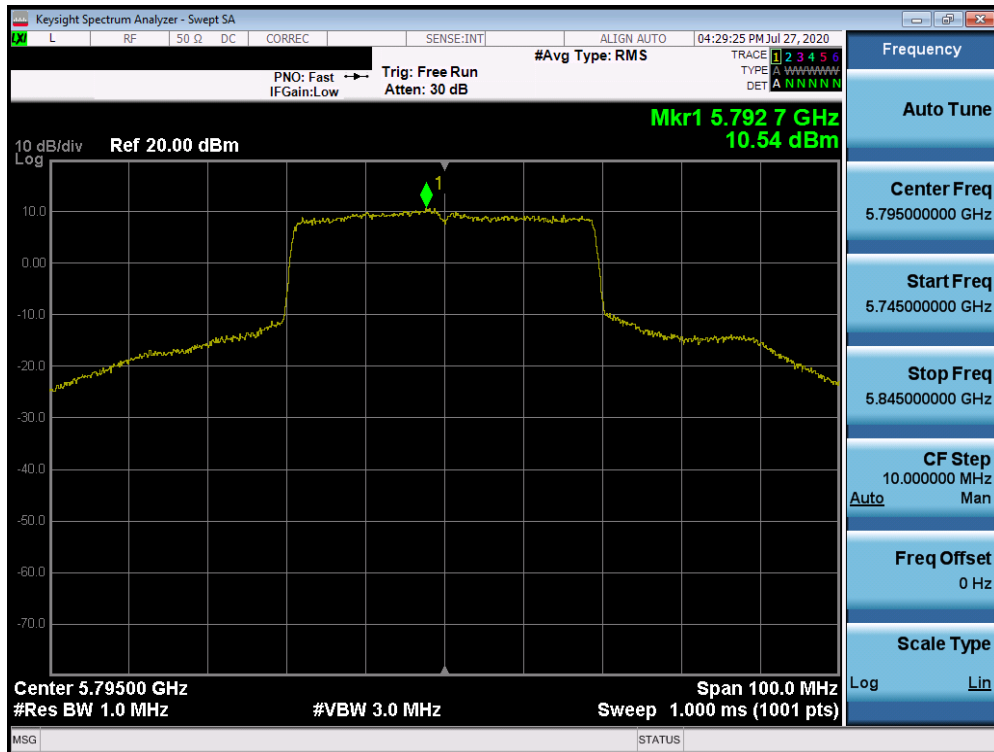


Plot 7-516. Power Spectral Density Plot ANT4 (40MHz BW 802.11ax (UNII Band 3) – Ch. 159)

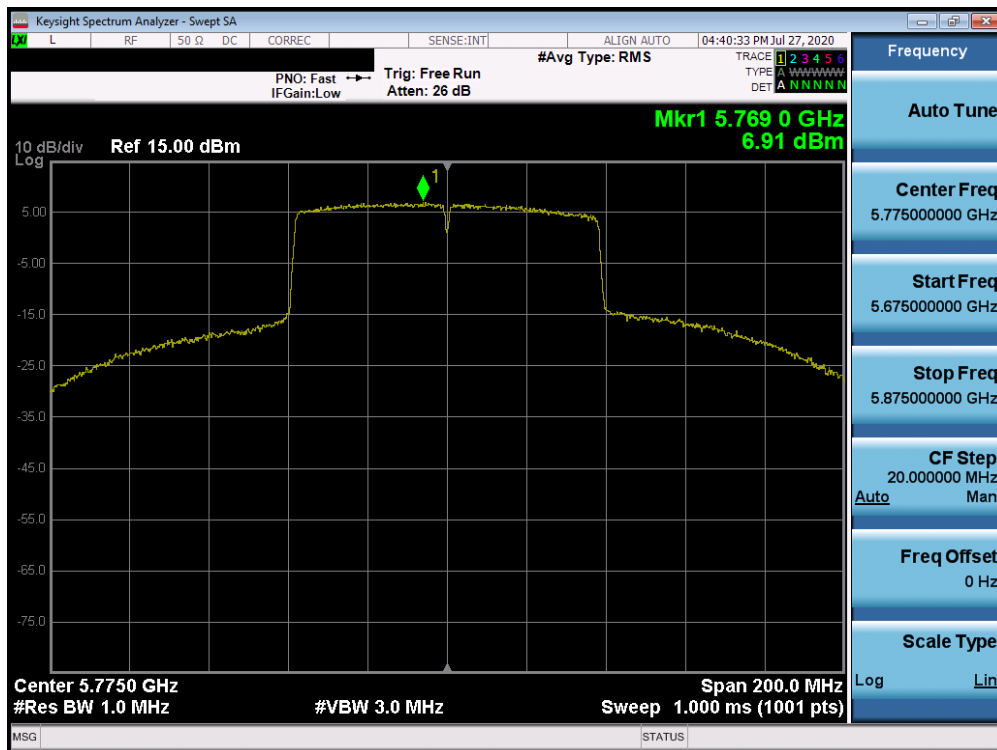

Plot 7-517. Power Spectral Density Plot ANT4 (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)


FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 295 of 344

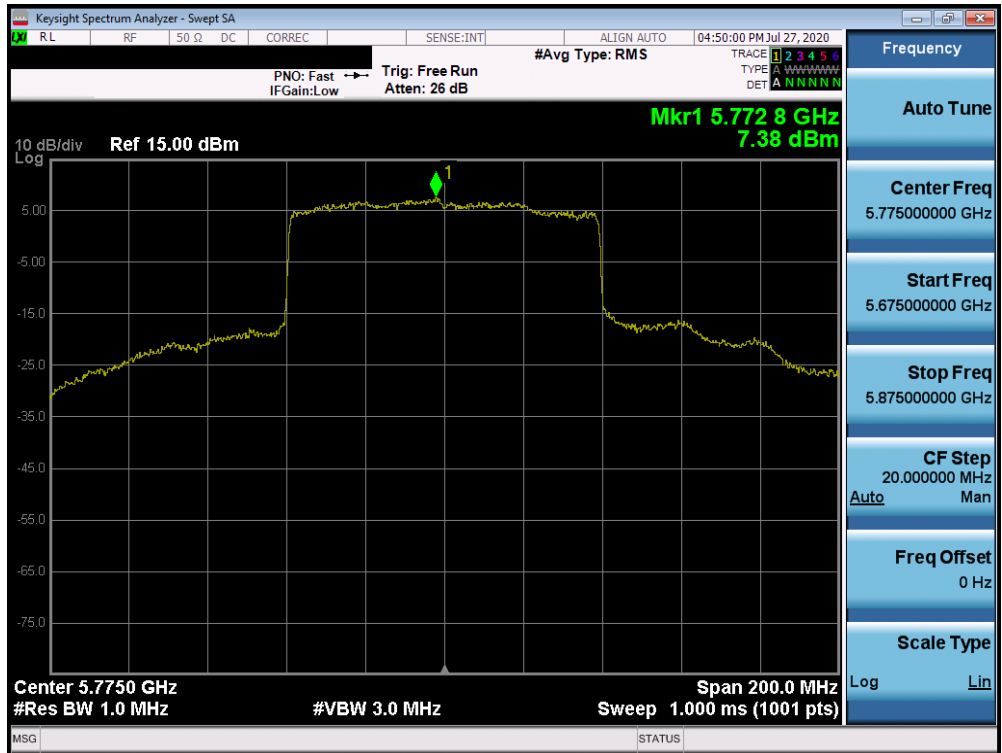


Plot 7-518. Power Spectral Density Plot ANT4 (80MHz BW 802.11ax (UNII Band 3) – Ch. 155)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 296 of 344

Antenna-5 Power Spectral Density Measurements

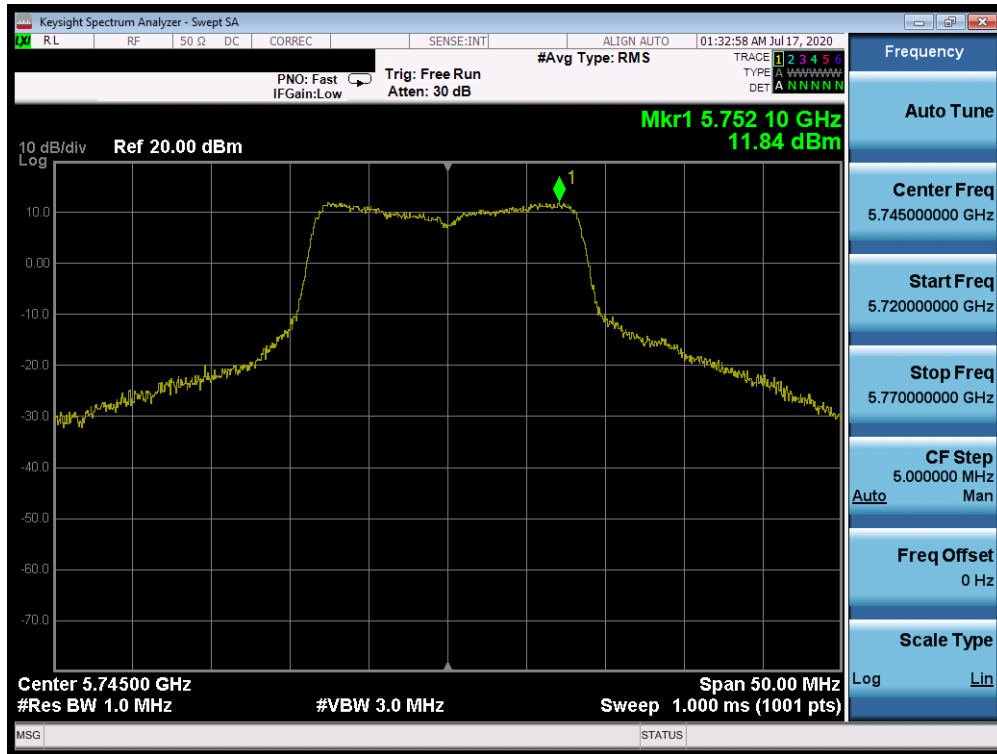


Plot 7-519. Power Spectral Density Plot ANT5 (802.11a (UNII Band 3) – Ch. 149)

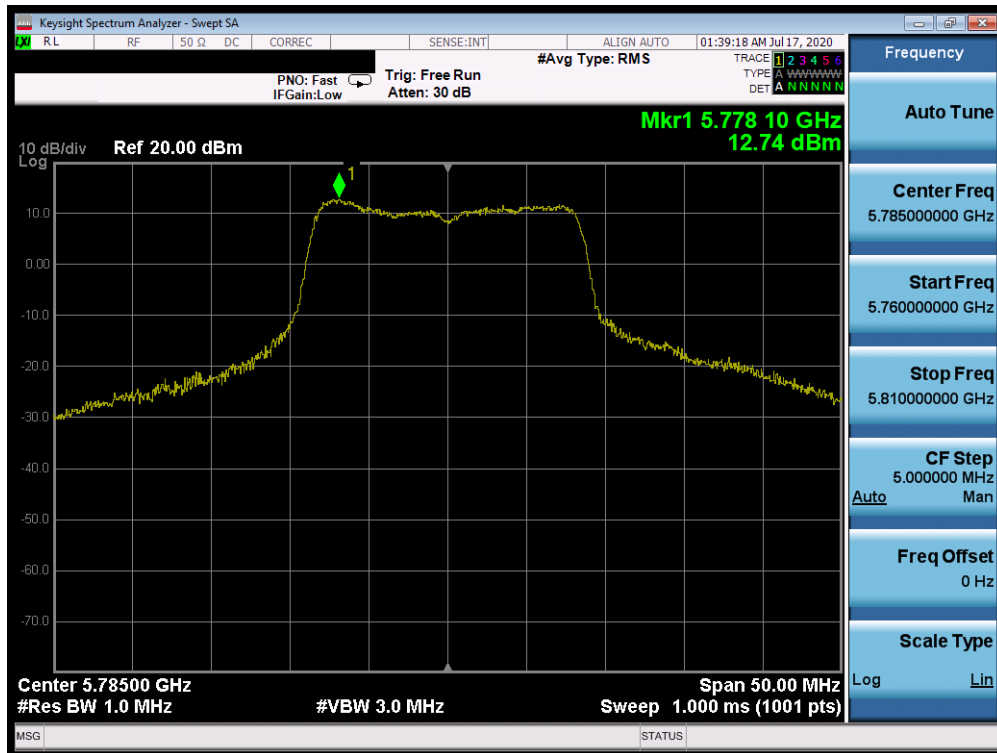


Plot 7-520. Power Spectral Density Plot ANT5 (802.11a (UNII Band 3) – Ch. 157)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 297 of 344

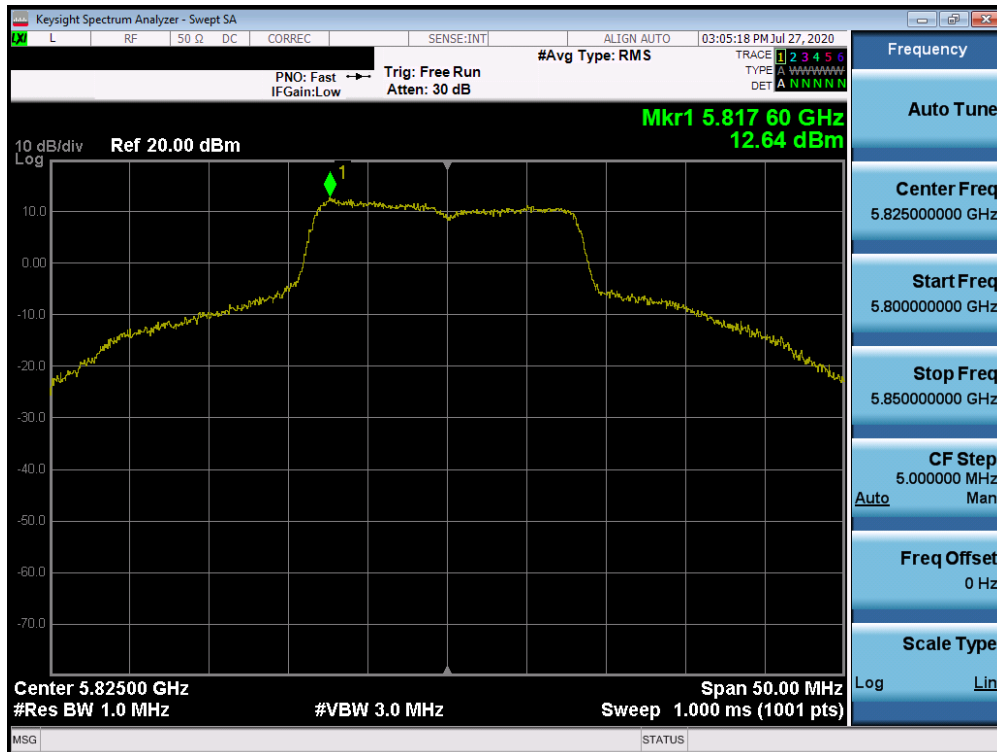


Plot 7-521. Power Spectral Density Plot ANT5 (802.11a (UNII Band 3) – Ch. 165)

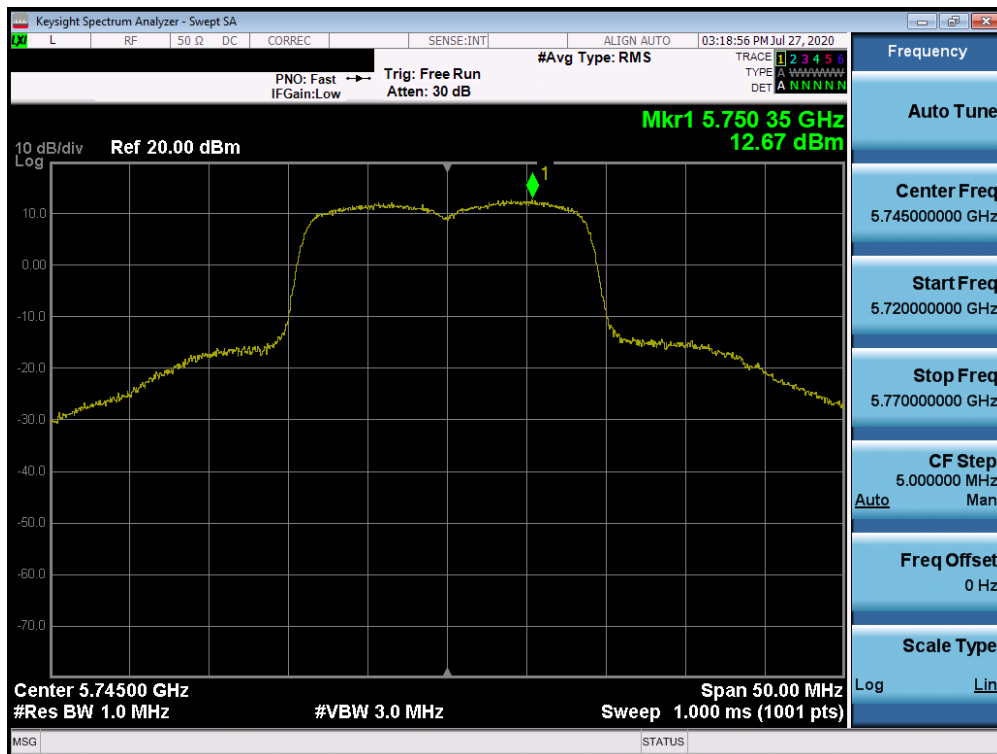


Plot 7-522. Power Spectral Density Plot ANT5 (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 298 of 344

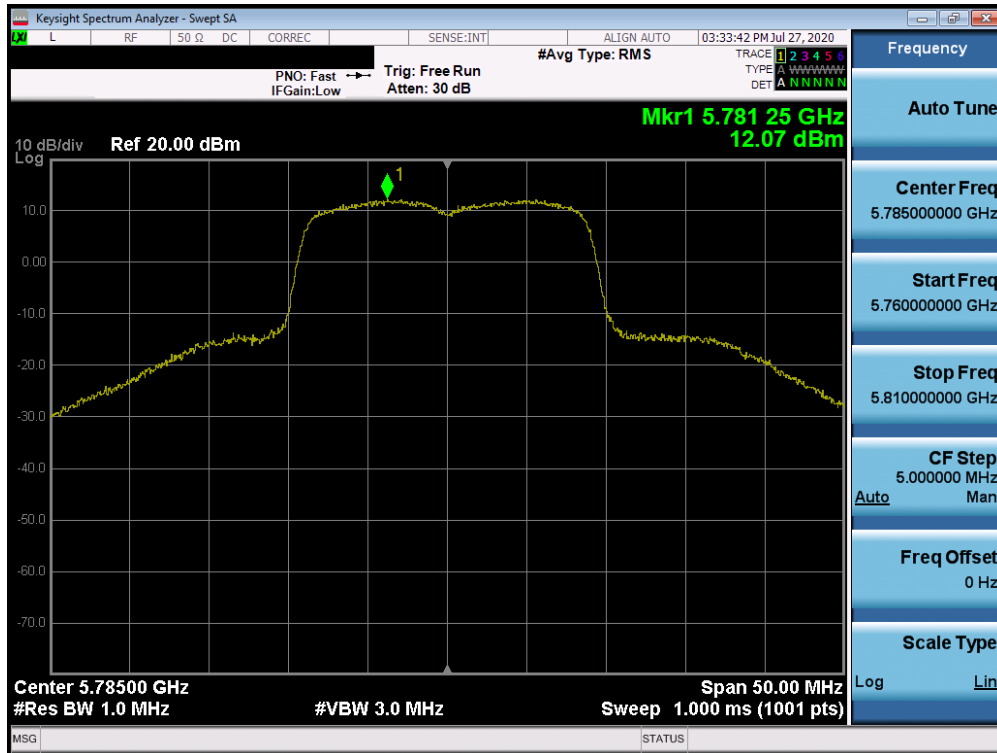


Plot 7-523. Power Spectral Density Plot ANT5 (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

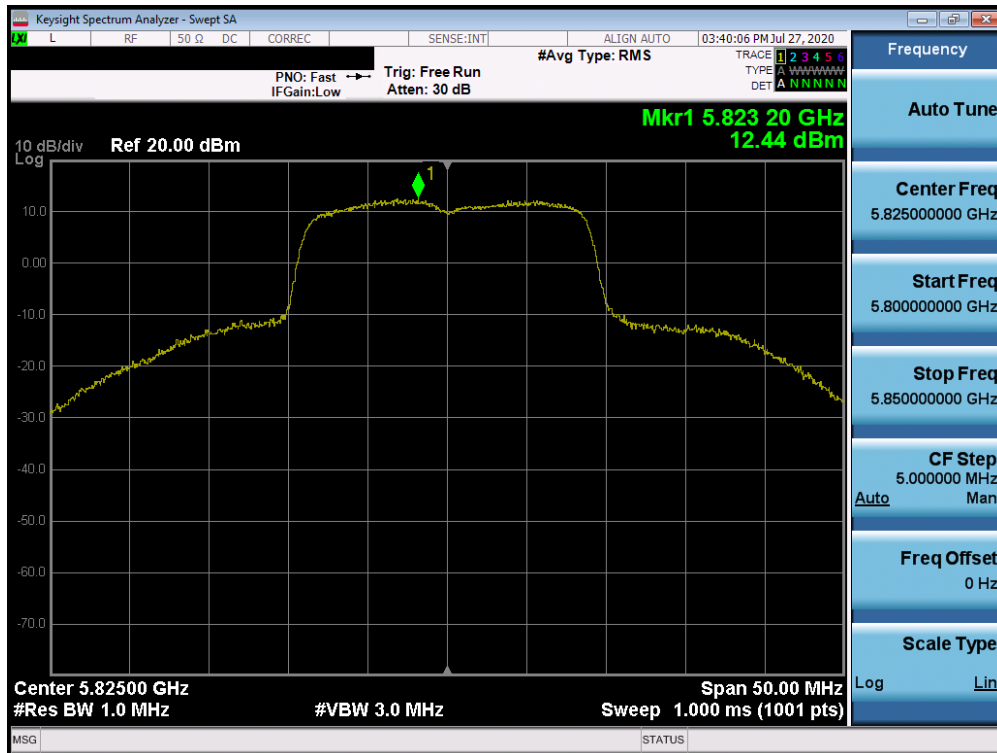


Plot 7-524. Power Spectral Density Plot ANT5 (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 299 of 344

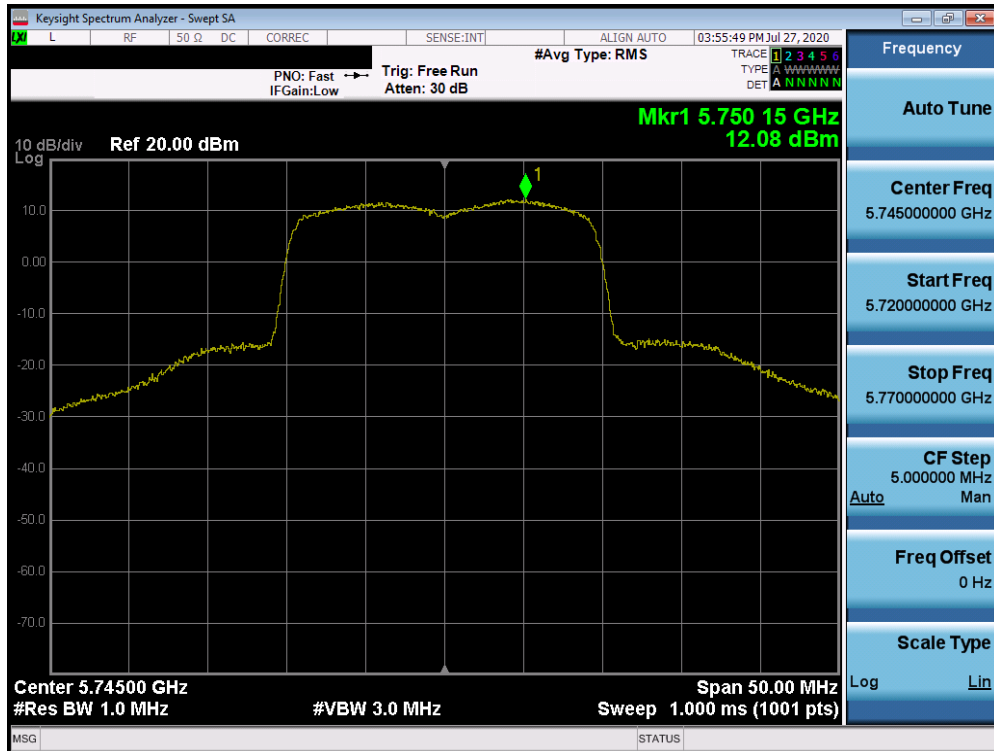


Plot 7-525. Power Spectral Density Plot ANT5 (20MHz BW 802.11ax (UNII Band 3) – Ch. 149)

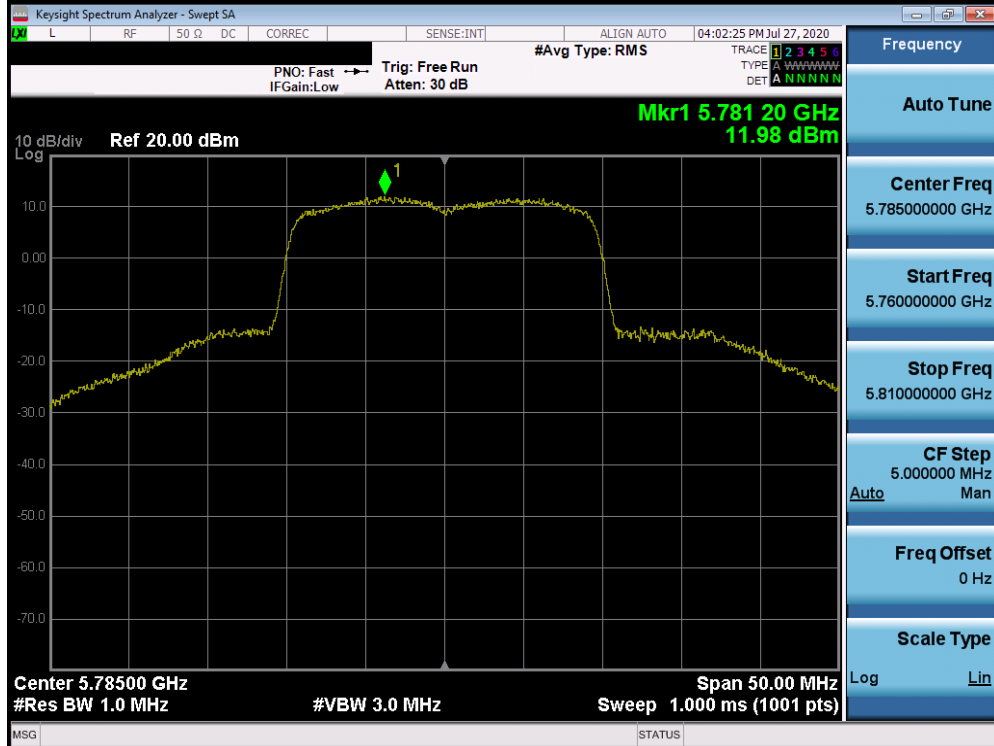


Plot 7-526. Power Spectral Density Plot ANT5 (20MHz BW 802.11ax (UNII Band 3) – Ch. 157)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 300 of 344

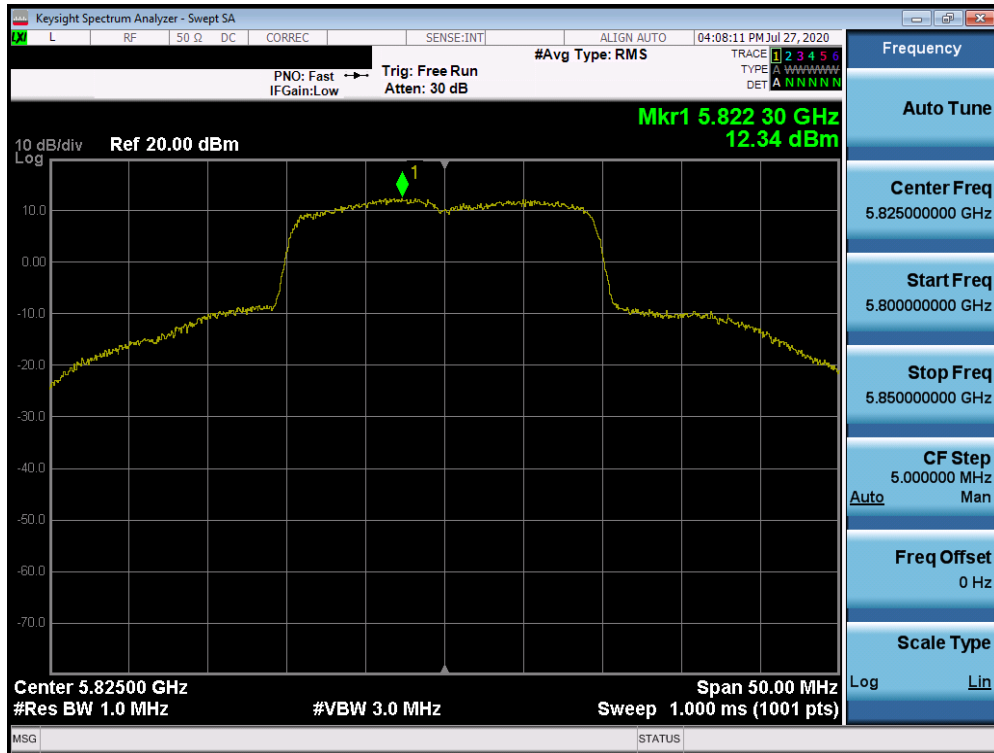


Plot 7-527. Power Spectral Density Plot ANT5 (20MHz BW 802.11ax (UNII Band 3) – Ch. 165)

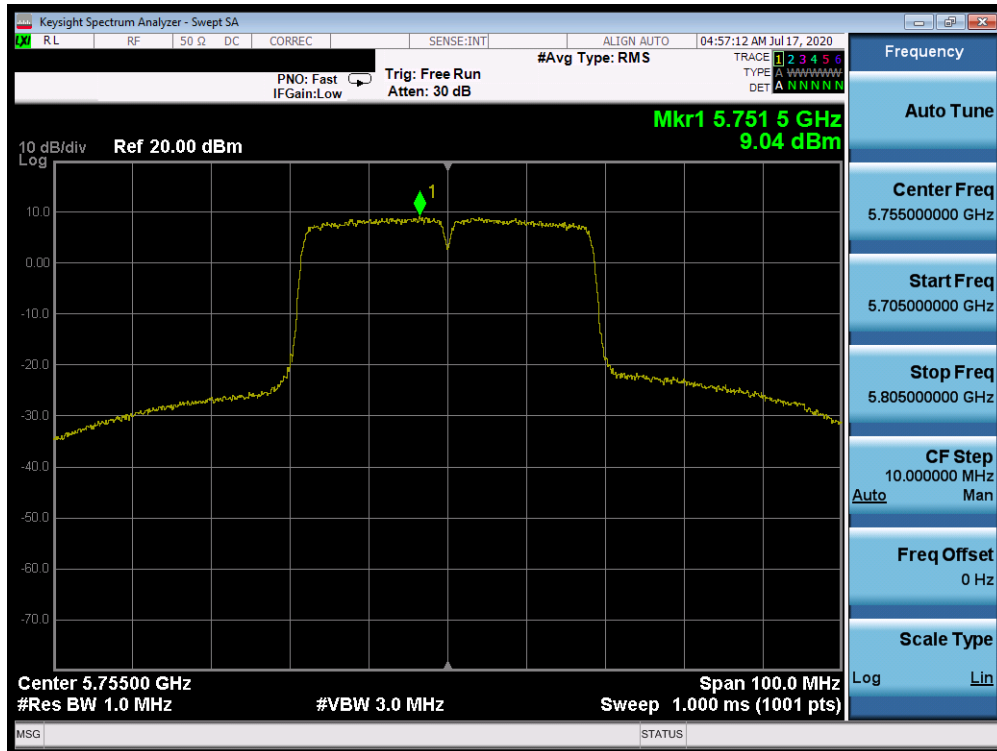


Plot 7-528. Power Spectral Density Plot ANT5 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 301 of 344

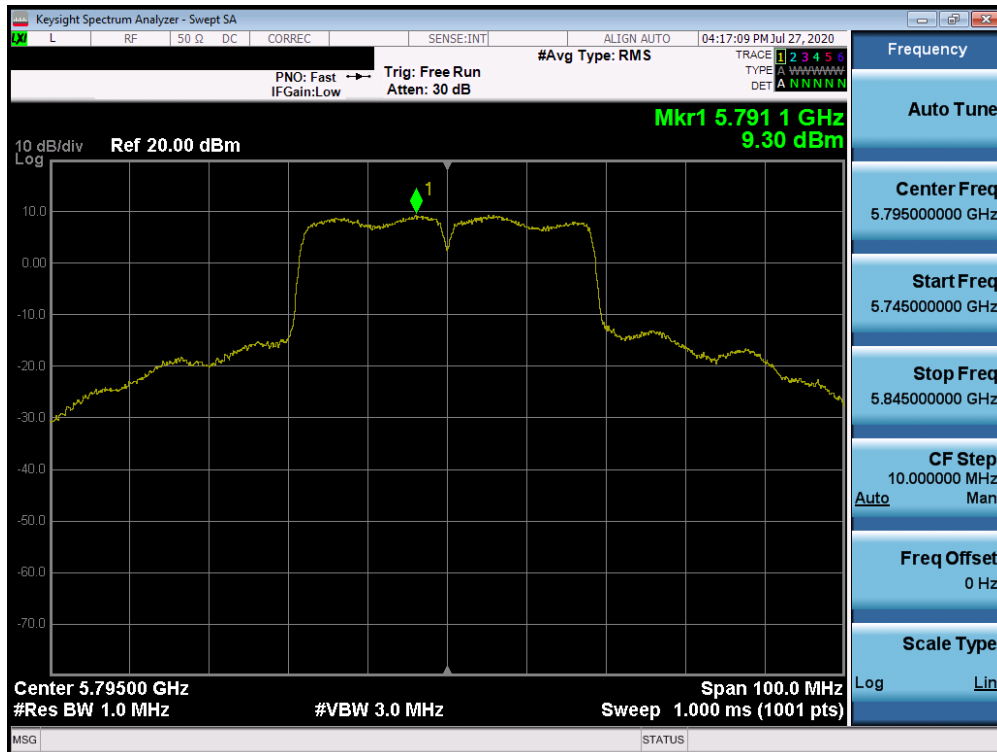


Plot 7-529. Power Spectral Density Plot ANT5 (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

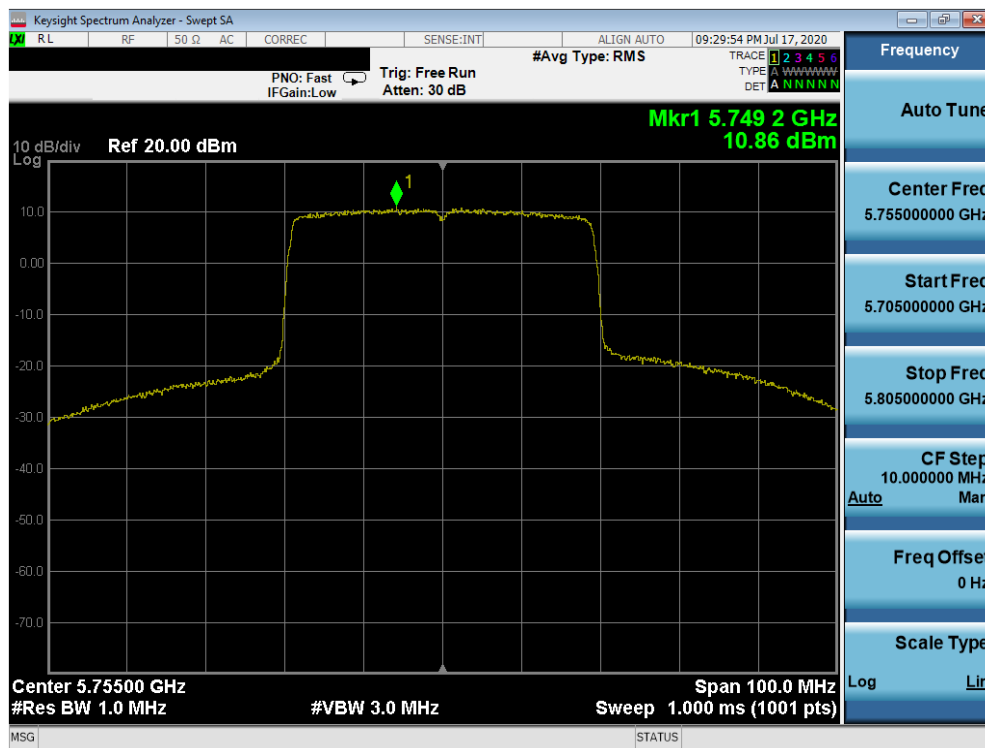


Plot 7-530. Power Spectral Density Plot ANT5 (40MHz BW 802.11ax (UNII Band 3) – Ch. 151)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 302 of 344

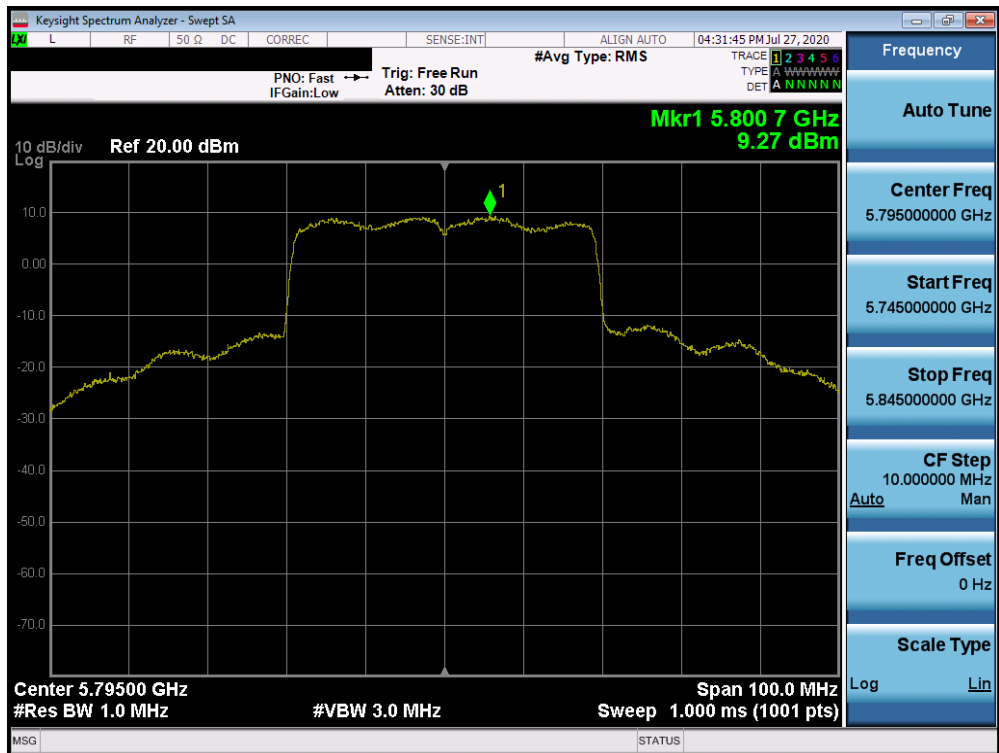


Plot 7-531. Power Spectral Density Plot ANT5 (40MHz BW 802.11ax (UNII Band 3) – Ch. 159)

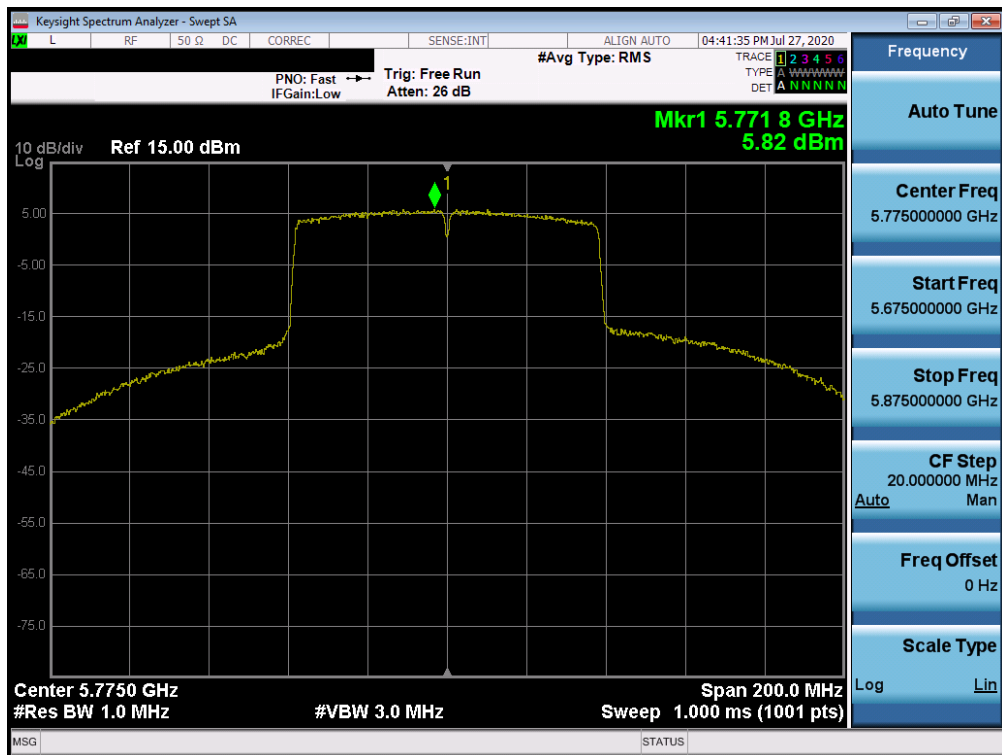

Plot 7-532. Power Spectral Density Plot ANT5 (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)


FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 303 of 344

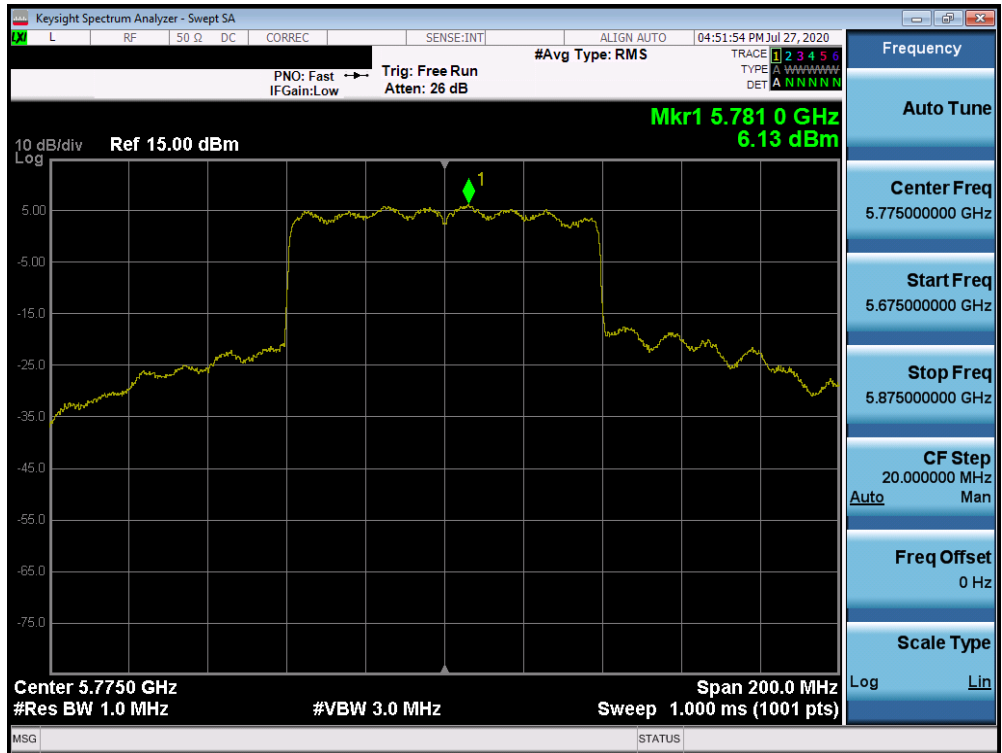


Plot 7-533. Power Spectral Density Plot ANT5 (80MHz BW 802.11ax (UNII Band 3) – Ch. 155)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 304 of 344

Antenna-6 Power Spectral Density Measurements

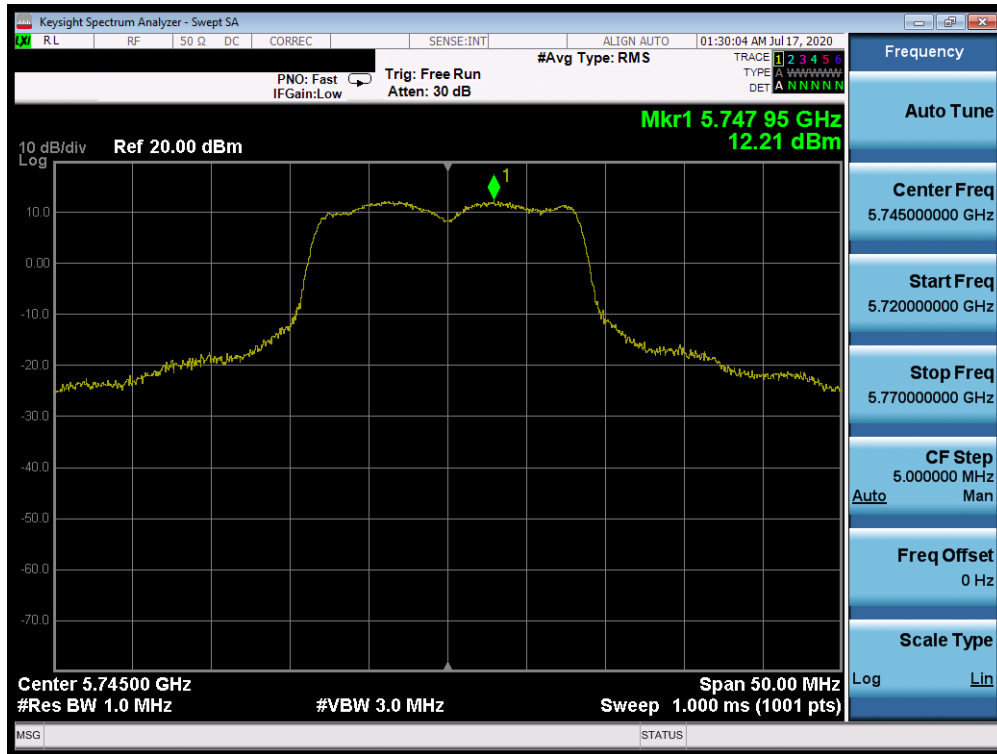


Plot 7-534. Power Spectral Density Plot ANT6 (802.11a (UNII Band 3) – Ch. 149)

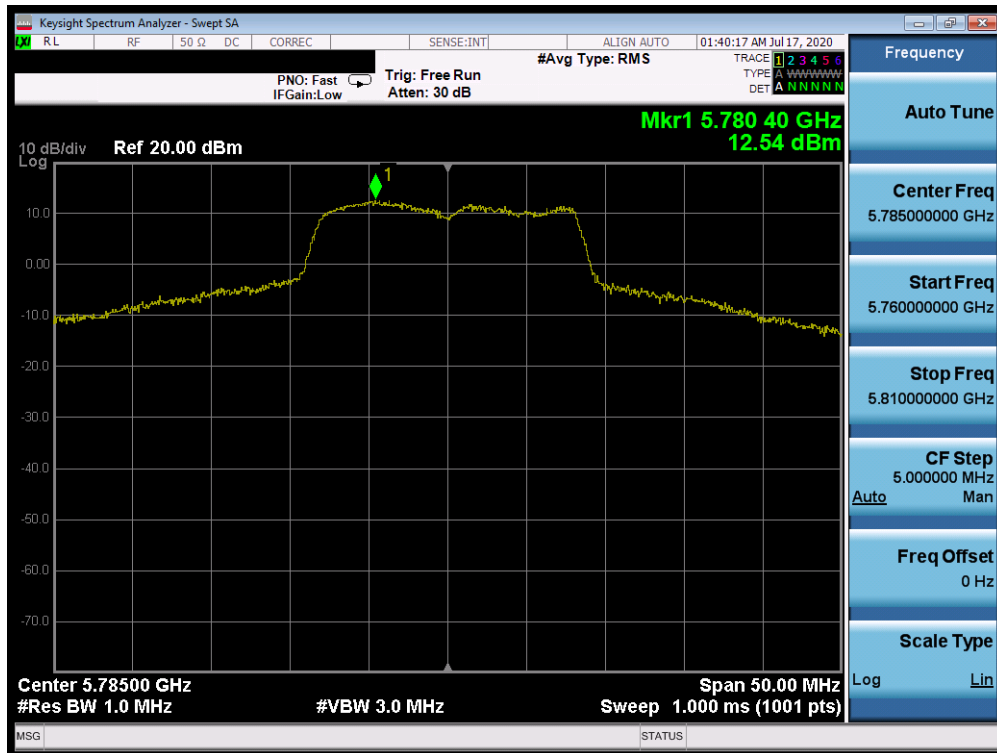


Plot 7-535. Power Spectral Density Plot ANT6 (802.11a (UNII Band 3) – Ch. 157)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 305 of 344

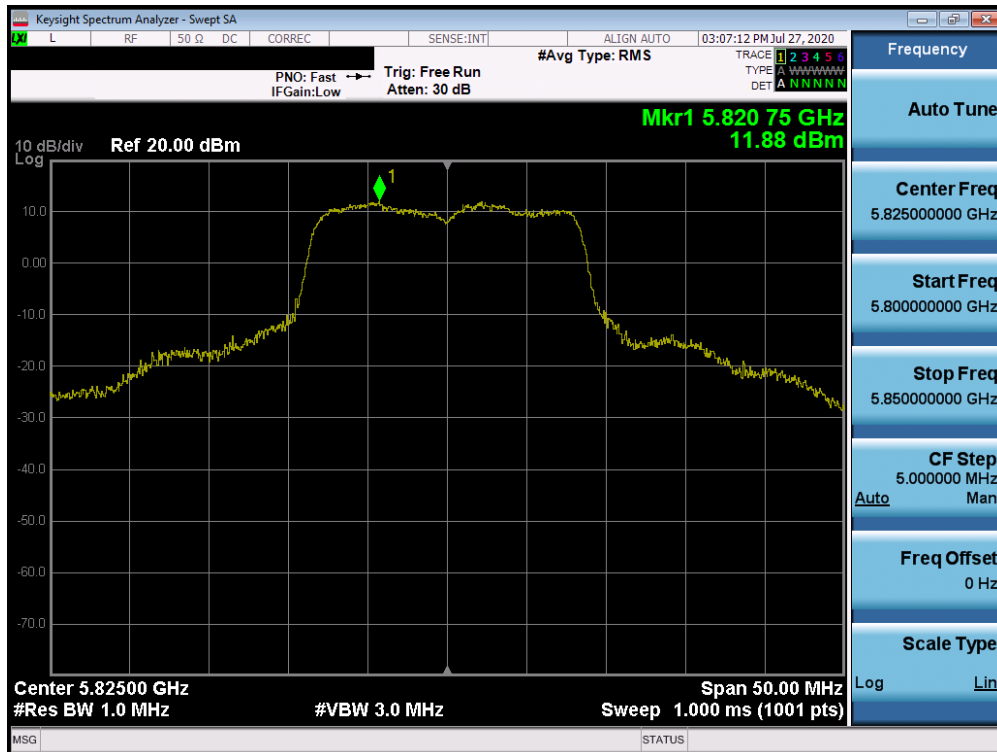


Plot 7-536. Power Spectral Density Plot ANT6 (802.11a (UNII Band 3) – Ch. 165)

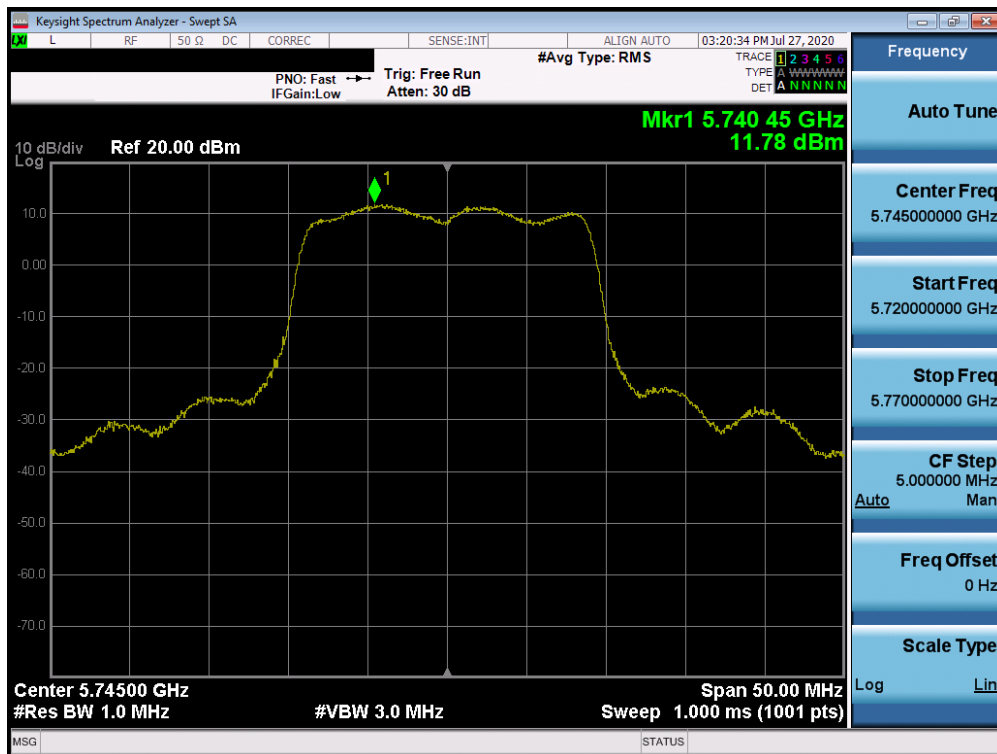


Plot 7-537. Power Spectral Density Plot ANT6 (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 306 of 344

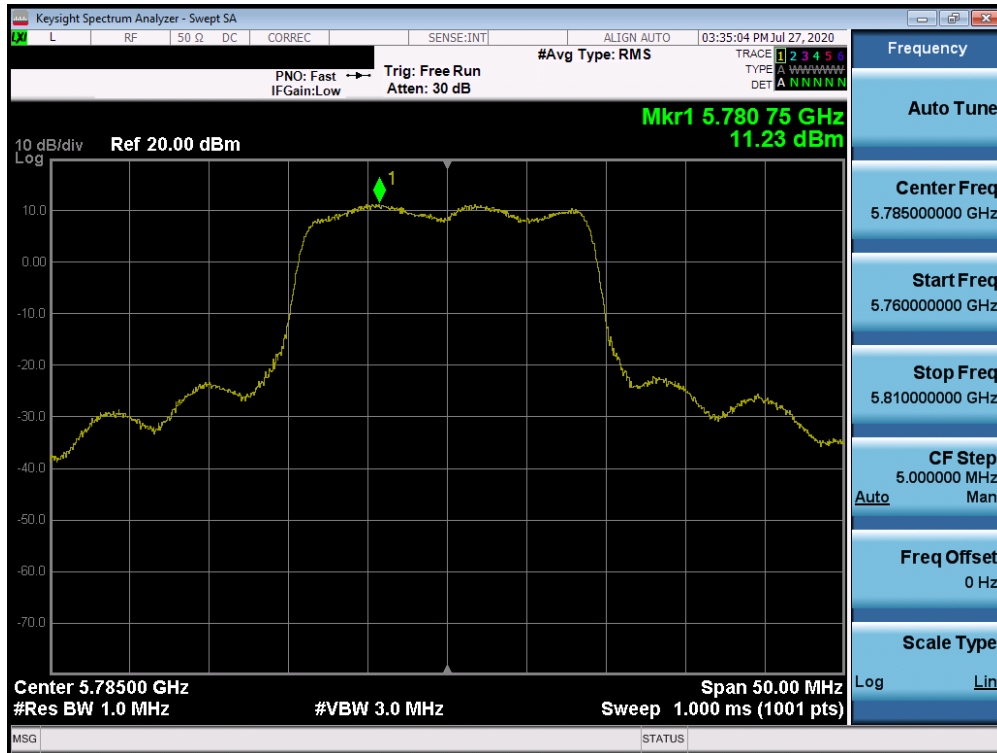


Plot 7-538. Power Spectral Density Plot ANT6 (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

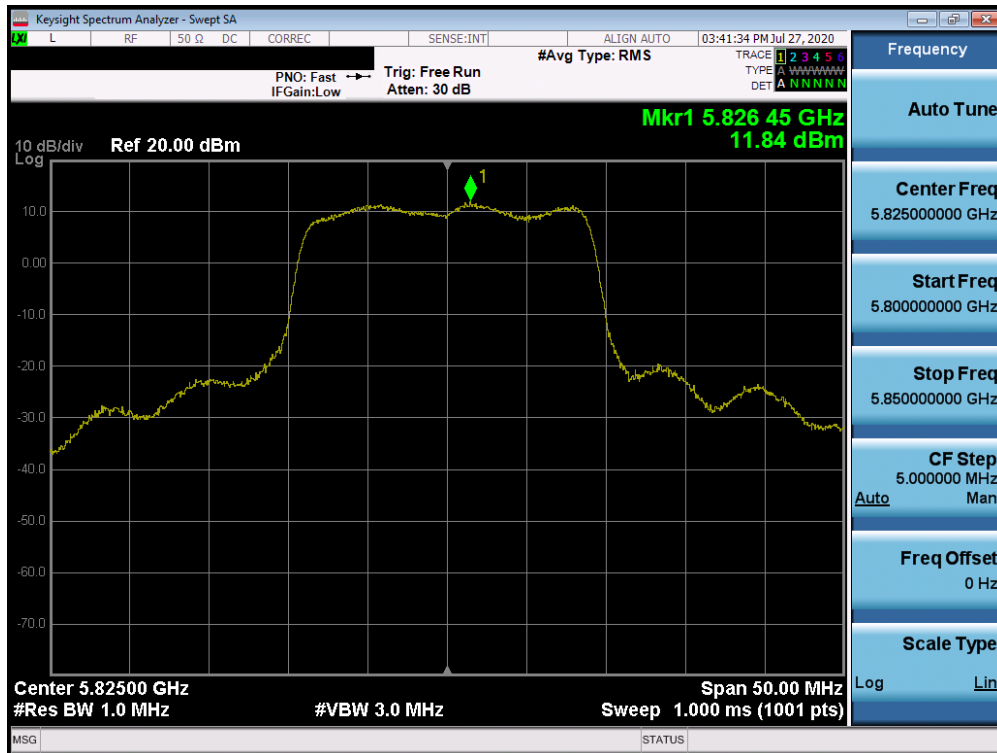


Plot 7-539. Power Spectral Density Plot ANT6 (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 307 of 344

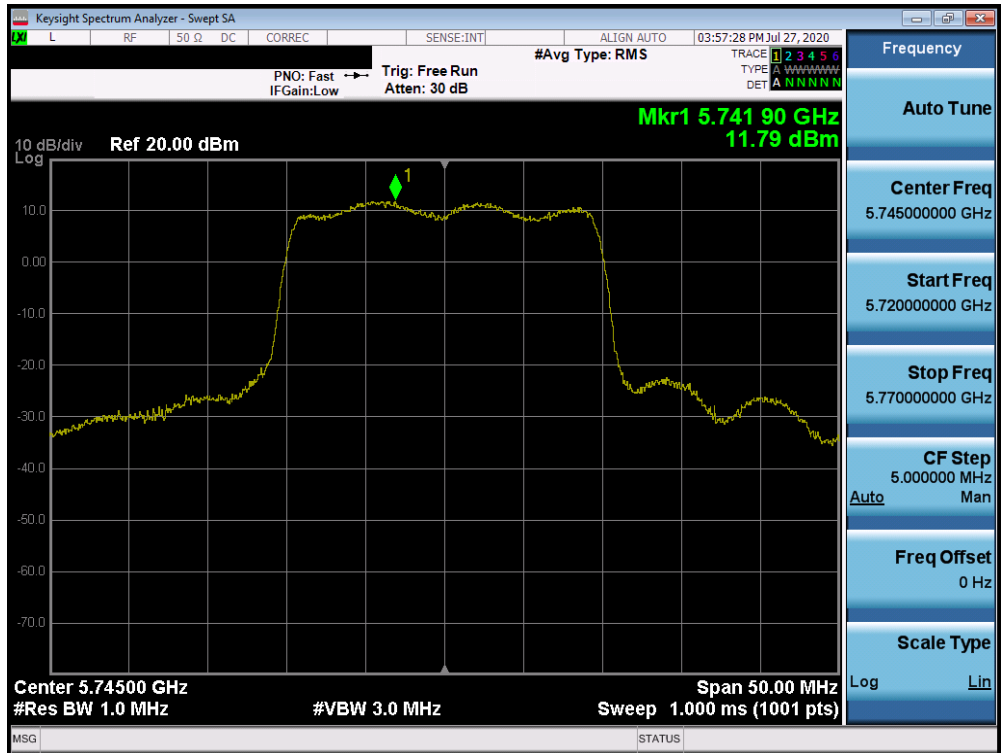


Plot 7-540. Power Spectral Density Plot ANT6 (20MHz BW 802.11ax (UNII Band 3) – Ch. 149)

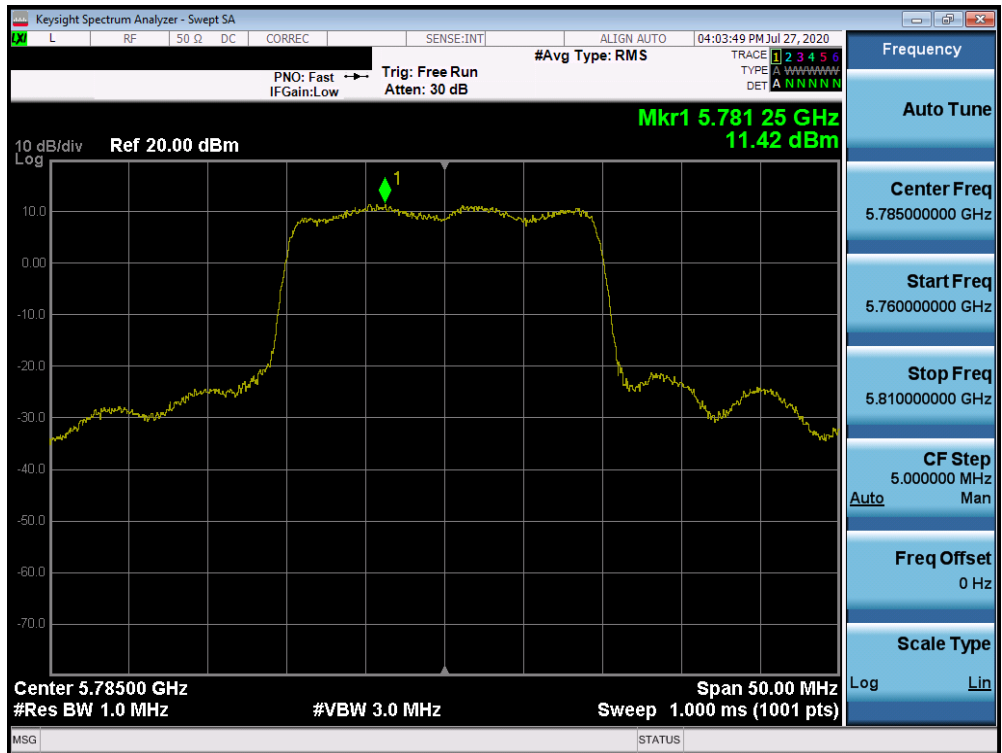


Plot 7-541. Power Spectral Density Plot ANT6 (20MHz BW 802.11ax (UNII Band 3) – Ch. 157)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 308 of 344

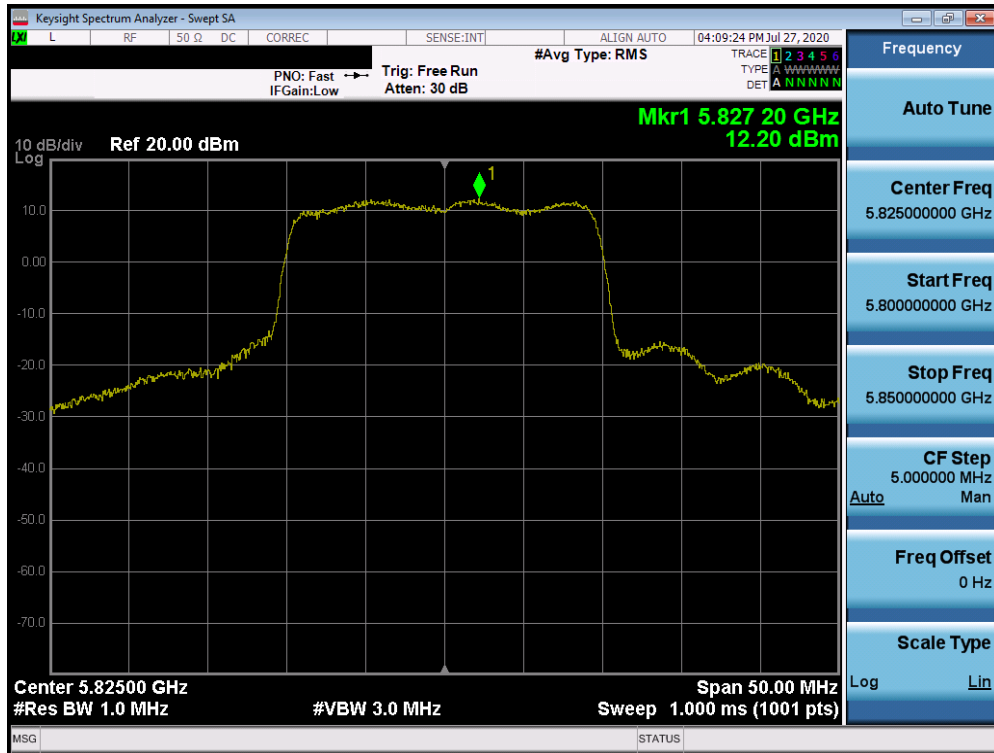


Plot 7-542. Power Spectral Density Plot ANT6 (20MHz BW 802.11ax (UNII Band 3) – Ch. 165)

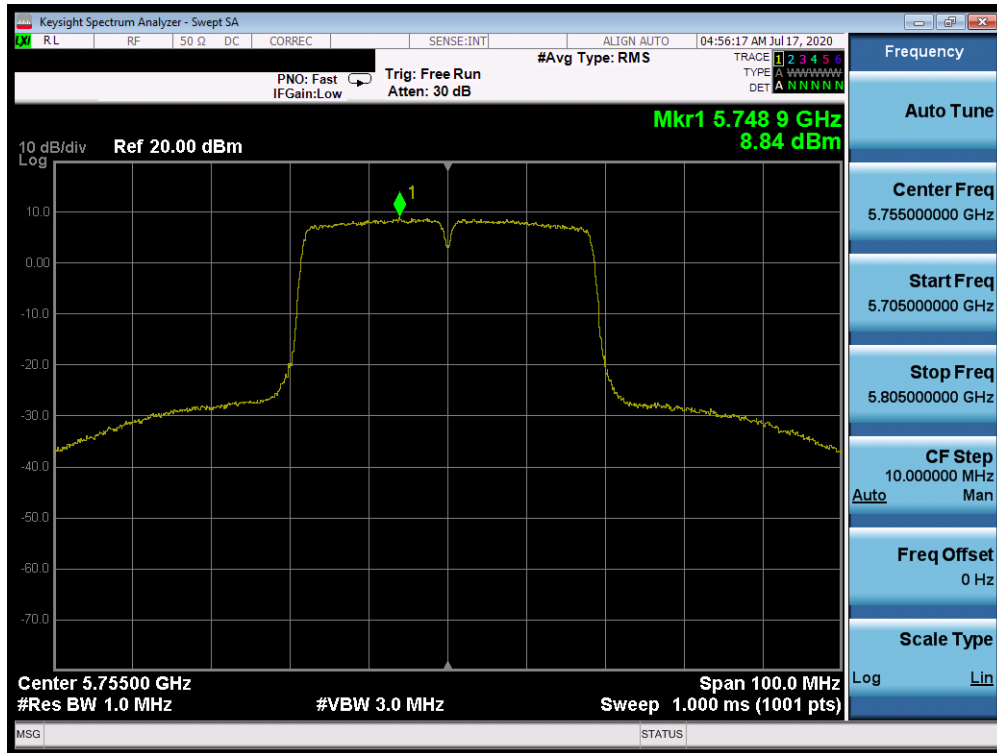


Plot 7-543. Power Spectral Density Plot ANT6 (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 309 of 344

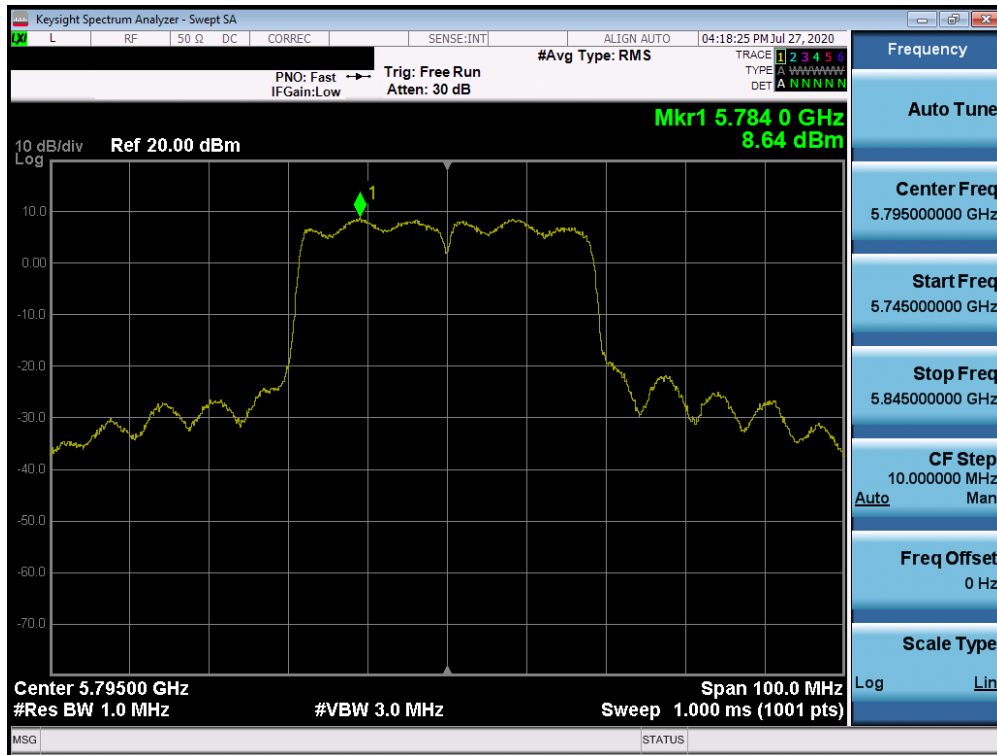


Plot 7-544. Power Spectral Density Plot ANT6 (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

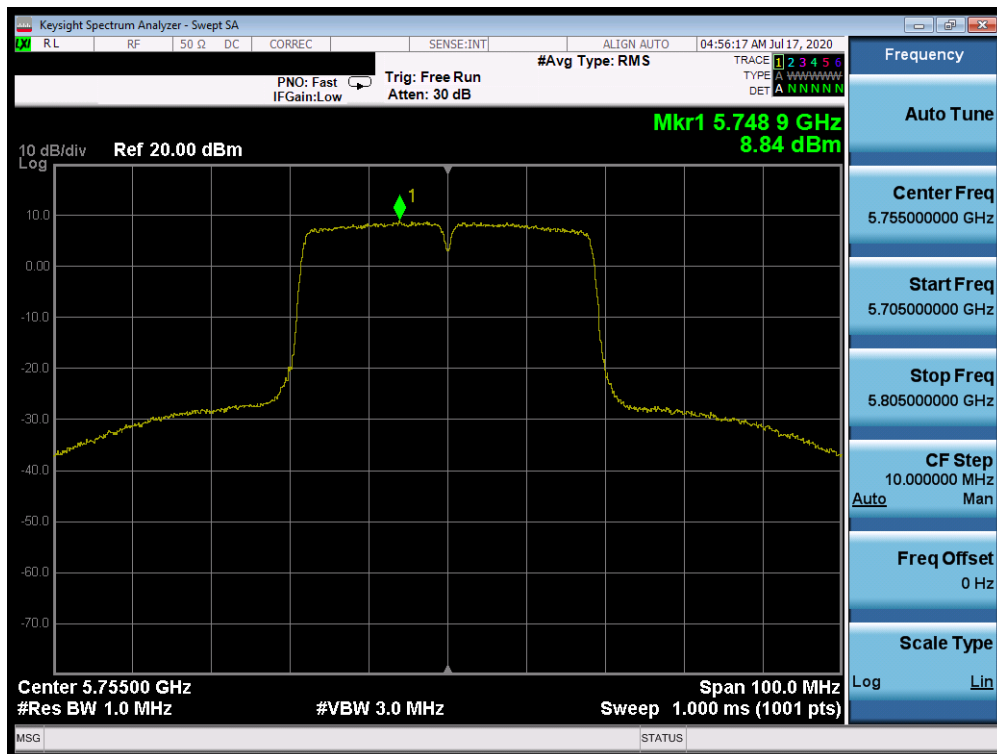


Plot 7-545. Power Spectral Density Plot ANT6 (40MHz BW 802.11ax (UNII Band 3) – Ch. 151)

FCC ID: A3LSMH204V	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 310 of 344

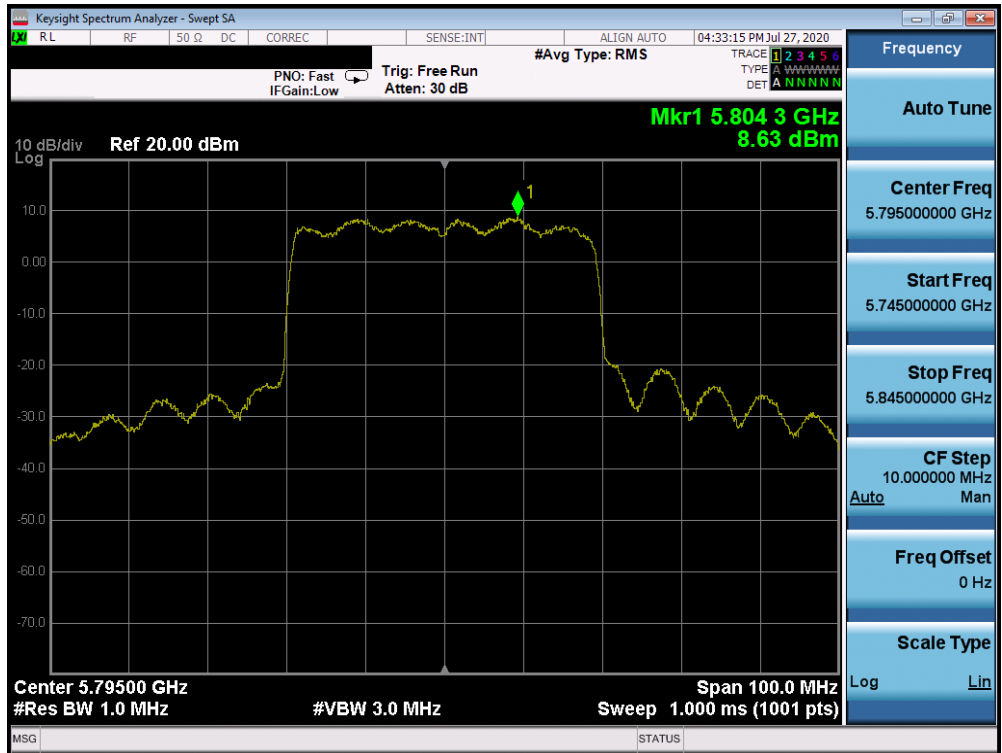


Plot 7-546. Power Spectral Density Plot ANT6 (40MHz BW 802.11ax (UNII Band 3) – Ch. 159)

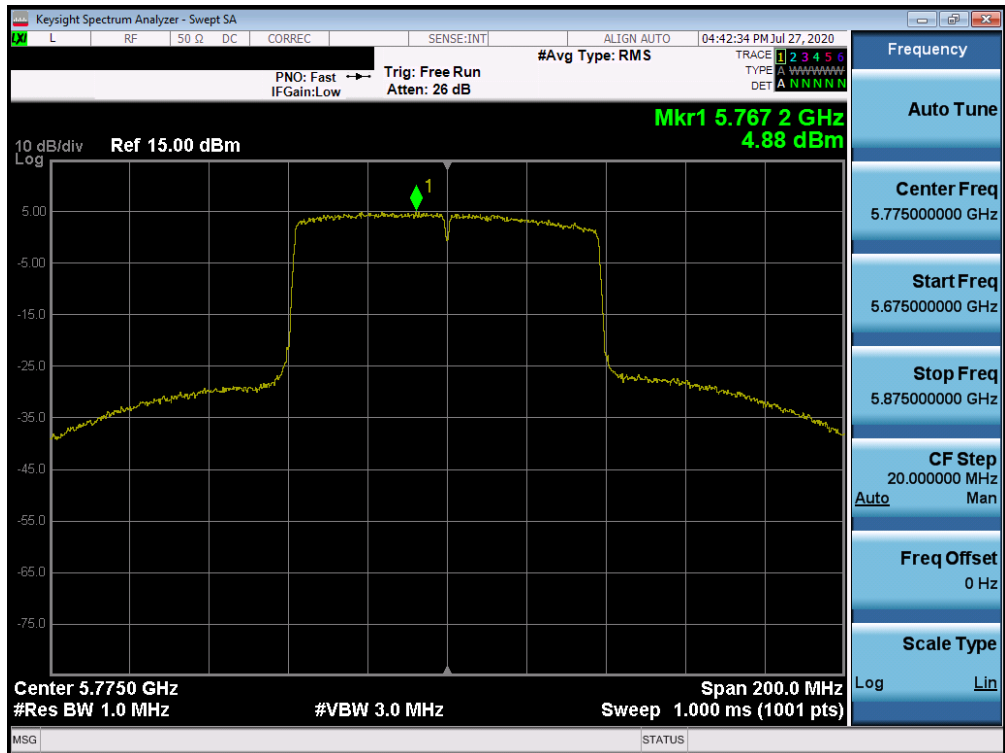

Plot 7-547. Power Spectral Density Plot ANT6 (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 311 of 344

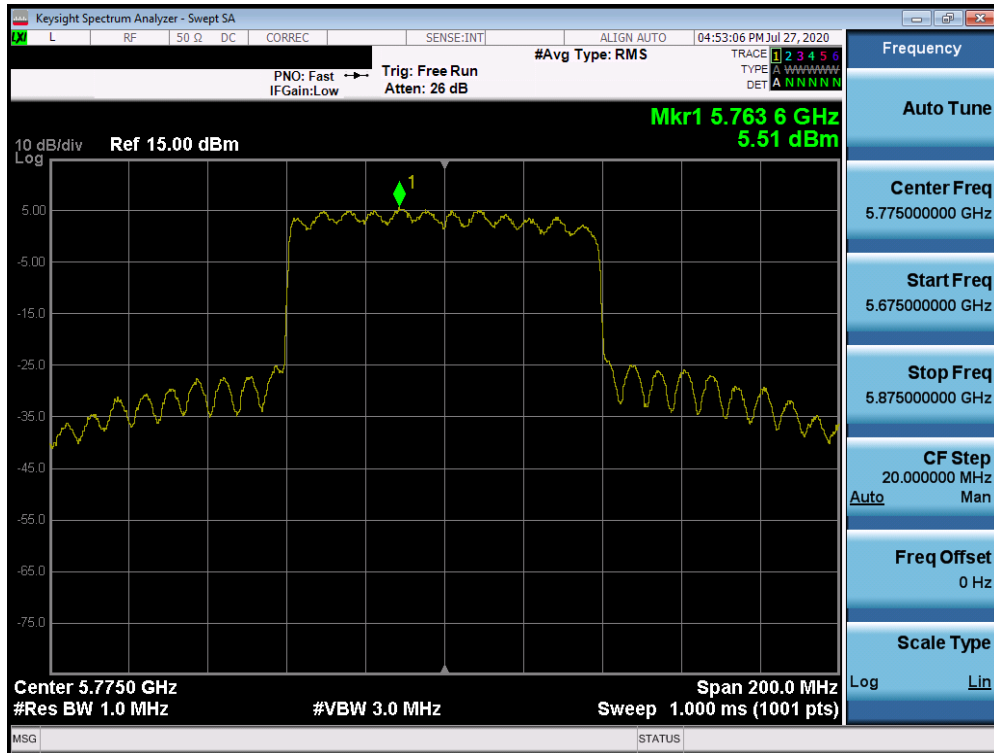

Plot 7-548. Power Spectral Density Plot ANT6 (80MHz BW 802.11ax (UNII Band 3) – Ch. 155)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 312 of 344

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 5745MHz in 802.11n (20MHz BW) mode, the average conducted power spectral density was measured to be 13.12 dBm for Antenna-3, 13.02 dBm for Antenna-4, 12.67 dBm for Antenna-5 and 11.78 dBm for Antenna-6.

$$\text{Antenna 3} + \text{Antenna 4} + \text{Antenna 5} + \text{Antenna 6} = \text{MIMO}$$

$$(13.12 \text{ dBm} + 13.02 \text{ dBm} + 12.67 \text{ dBm} + 11.78 \text{ dBm}) = (20.512 \text{ mW} + 20.045 \text{ mW} + 18.493 \text{ mW} + 15.066 \text{ mW}) = 74.115 \text{ mW} = 18.70 \text{ dBm}$$

Sample e.i.r.p Power Spectral Density Calculation:

At 5745MHz in 802.11n (20MHz BW) mode, the average MIMO power density was calculated to be 8.62 dBm with directional gain of 5.4 dBi.

$$\text{e.i.r.p. Power Spectral Density(dBm)} = \text{Power Spectral Density (dBm)} + \text{Ant gain (dBi)}$$

$$18.70 \text{ dBm} + 5.4 \text{ dBi} = 24.1 \text{ dBm}$$

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 313 of 344

7.6 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW) , 802.11ac (20MHz), 802.11ac (40MHz), 802.11ac (80MHz), 802.11ac (80+80MHz), 802.11ax (20MHz), 802.11ax (40MHz), 802.11ax (80MHz) and 802.11ax (80+80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-25 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-25. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 314 of 344	

8. Trace was averaged over 100 sweeps

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

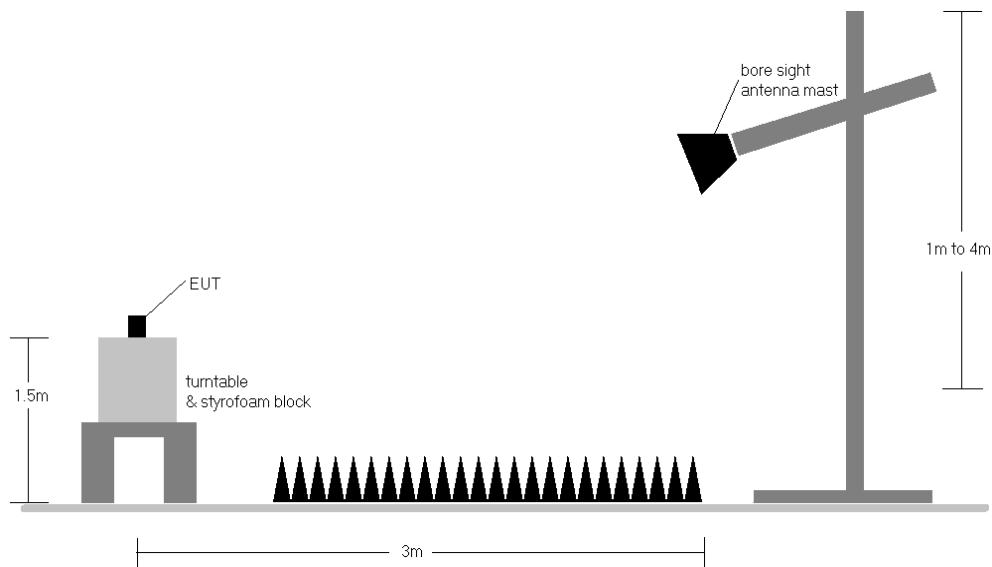


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 315 of 344	

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-25.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-25. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested while powered by an DC power source.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.
8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]


Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 316 of 344	


7.6.1 MIMO Radiated Spurious Emission Measurements

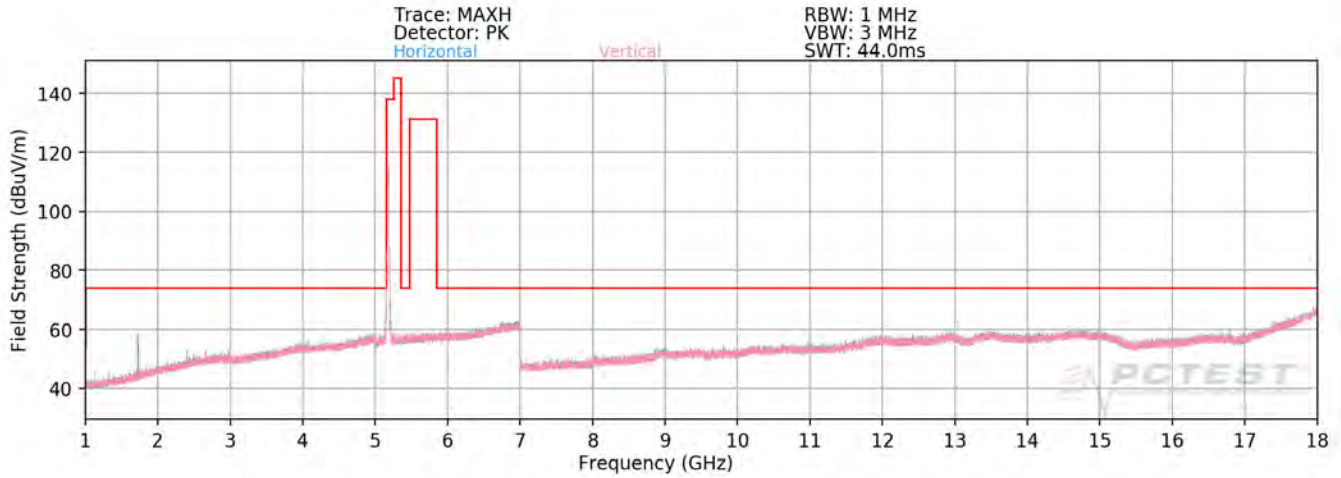

Plot 7-549. Radiated Spurious Plot above 1GHz MIMO (802.11a – U1 Ch. 40)

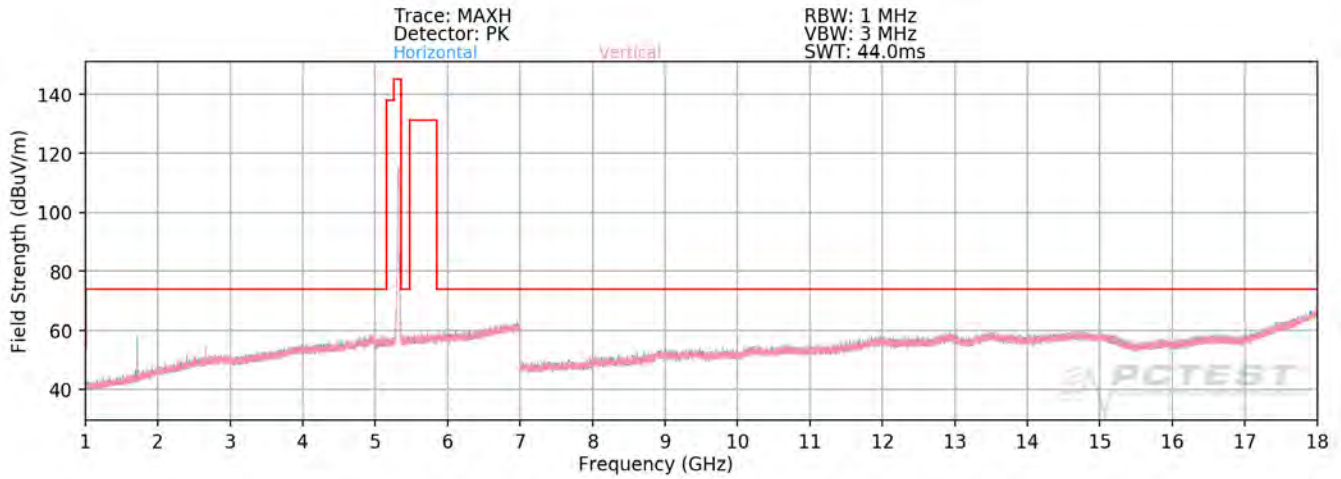


Plot 7-550. Radiated Spurious Plot above 1GHz MIMO (802.11a – U2A Ch. 56)

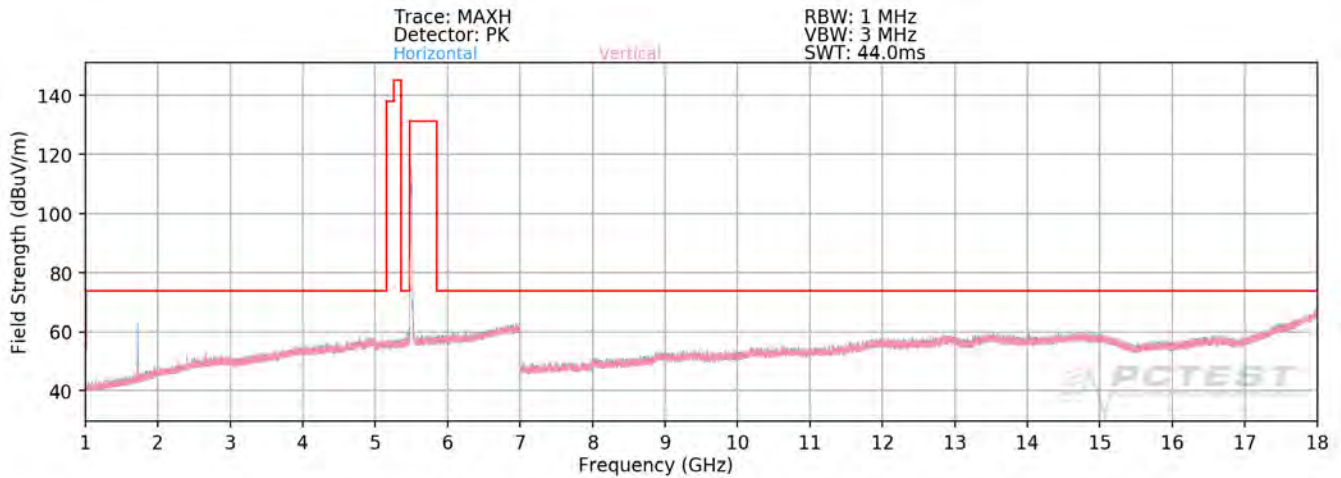


Plot 7-551. Radiated Spurious Plot above 1GHz MIMO (802.11a – U2C Ch. 120)


FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 317 of 344

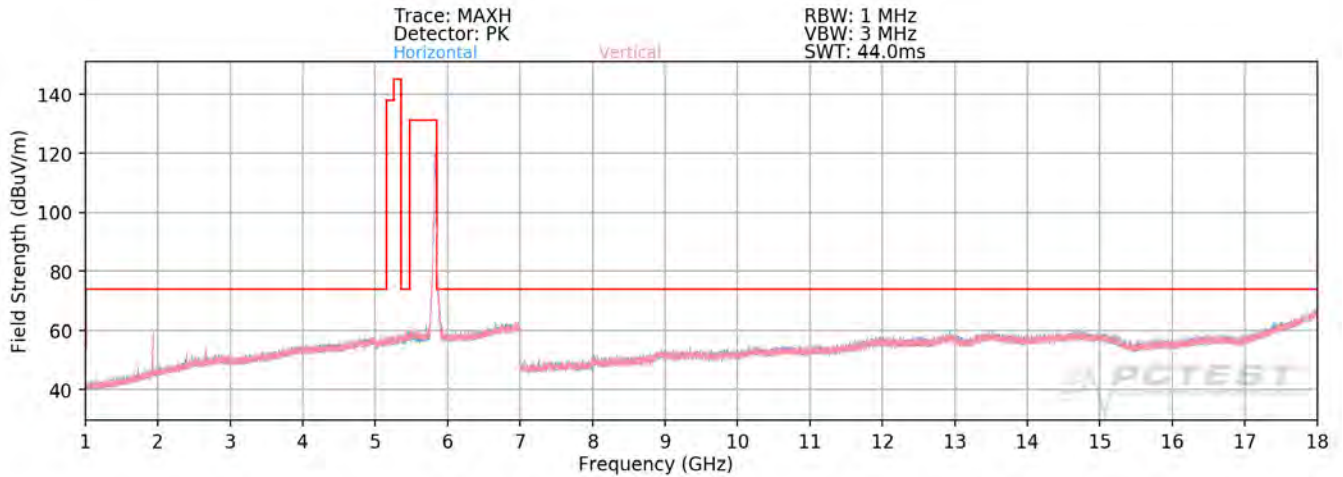

Plot 7-552. Radiated Spurious Plot above 1GHz MIMO (802.11a – U3 Ch. 157)

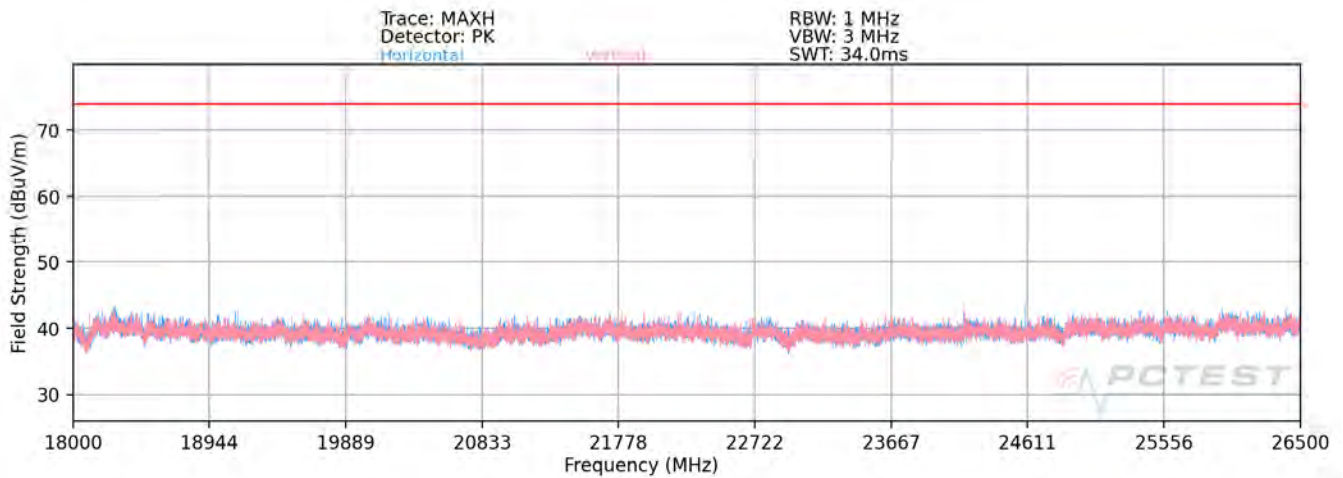

Plot 7-553. Radiated Spurious Plot above 18GHz - 26.5GHz MIMO (802.11a)

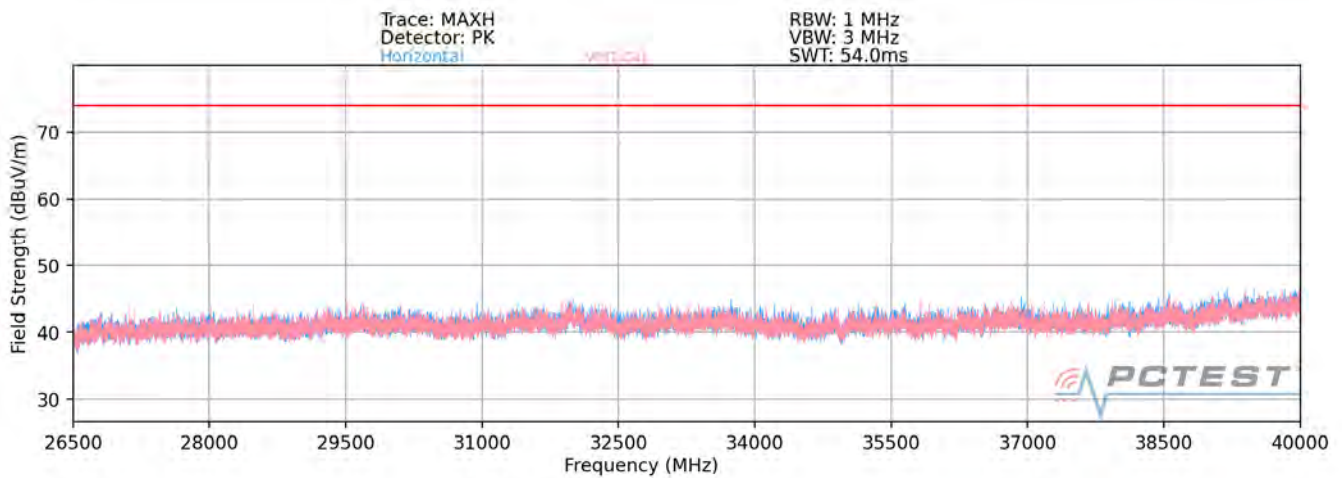

Plot 7-554. Radiated Spurious Plot 26.5GHz - 40GHz MIMO (802.11a)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 318 of 344

MIMO Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	V	150	29	-68.17	13.05	0.00	51.88	68.20	-16.32
* 15540.00	Average	V	-	-	-82.01	15.13	0.00	40.12	53.98	-13.86
* 15540.00	Peak	V	-	-	-70.59	15.13	0.00	51.54	73.98	-22.44
* 20720.00	Average	V	-	-	-59.91	-3.74	-9.54	33.81	53.98	-20.17
* 20720.00	Peak	V	-	-	-52.24	-3.74	-9.54	41.48	73.98	-32.50
25900.00	Peak	V	-	-	-50.67	-3.03	-9.54	43.76	68.20	-24.44

Table 7-26. Radiated Measurements MIMO

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	Peak	V	159	350	-68.22	12.63	0.00	51.41	68.20	-16.79
* 15600.00	Average	V	-	-	-82.21	15.53	0.00	40.32	53.98	-13.66
* 15600.00	Peak	V	-	-	-71.77	15.53	0.00	50.76	73.98	-23.22
* 20800.00	Average	V	-	-	-59.21	-3.76	-9.54	34.49	53.98	-19.49
* 20800.00	Peak	V	-	-	-51.72	-3.76	-9.54	41.98	73.98	-32.00
26000.00	Peak	V	-	-	-50.30	-2.81	-9.54	44.35	68.20	-23.85

Table 7-27. Radiated Measurements MIMO

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 319 of 344	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10480.00	Peak	V	150	30	-69.04	12.97	0.00	50.93	68.20	-17.27
* 15720.00	Average	V	-	-	-82.13	15.64	0.00	40.51	53.98	-13.47
* 15720.00	Peak	V	-	-	-71.44	15.64	0.00	51.20	73.98	-22.78
* 20960.00	Average	V	-	-	-59.68	-3.71	-9.54	34.07	53.98	-19.91
* 20960.00	Peak	V	-	-	-51.70	-3.71	-9.54	42.05	73.98	-31.93
26200.00	Peak	V	-	-	-52.04	-2.65	-9.54	42.76	68.20	-25.44

Table 7-28. Radiated Measurements MIMO

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10520.00	Peak	V	122	247	-66.84	12.67	0.00	52.83	68.20	-15.37
* 15780.00	Average	V	-	-	-82.18	15.84	0.00	40.66	53.98	-13.32
* 15780.00	Peak	V	-	-	-71.74	15.84	0.00	51.10	73.98	-22.88
* 21040.00	Average	V	-	-	-60.39	-3.87	-9.54	33.20	53.98	-20.78
* 21040.00	Peak	V	-	-	-52.58	-3.87	-9.54	41.01	73.98	-32.97
26300.00	Peak	V	-	-	-50.88	-2.82	-9.54	43.76	68.20	-24.44

Table 7-29. Radiated Measurements MIMO

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 320 of 344	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10560.00	Peak	V	150	228	-68.60	13.03	0.00	51.43	68.20	-16.77
* 15840.00	Average	V	-	-	-81.50	16.04	0.00	41.54	53.98	-12.44
* 15840.00	Peak	V	-	-	-70.25	16.04	0.00	52.79	73.98	-21.19
* 21120.00	Average	V	-	-	-60.30	-3.66	-9.54	33.50	53.98	-20.48
* 21120.00	Peak	V	-	-	-52.47	-3.66	-9.54	41.33	73.98	-32.65
26400.00	Peak	V	-	-	-50.11	-2.63	-9.54	44.72	68.20	-23.48

Table 7-30. Radiated Measurements MIMO

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 10640.00	Average	V	100	248	-71.28	13.25	0.00	48.97	53.98	-5.01
* 10640.00	Peak	V	100	248	-66.46	13.25	0.00	53.79	73.98	-20.19
* 15960.00	Average	V	-	-	-82.01	15.61	0.00	40.60	53.98	-13.38
* 15960.00	Peak	V	-	-	-71.85	15.61	0.00	50.76	73.98	-23.22
* 21280.00	Average	V	-	-	-60.38	-3.58	-9.54	33.50	53.98	-20.48
* 21280.00	Peak	V	-	-	-51.65	-3.58	-9.54	42.23	73.98	-31.75
26600.00	Peak	V	-	-	-51.49	-2.25	-9.54	43.72	68.20	-24.48

Table 7-31. Radiated Measurements MIMO

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 321 of 344	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	125	240	-69.52	13.39	0.00	50.87	53.98	-3.11
* 11000.00	Peak	V	125	240	-64.99	13.39	0.00	55.40	73.98	-18.58
16500.00	Peak	V	-	-	-71.56	15.45	0.00	50.89	68.20	-17.31
22000.00	Peak	V	-	-	-51.94	-3.43	-9.54	42.09	68.20	-26.11
27500.00	Peak	V	-	-	-51.64	-2.72	-9.54	43.10	68.20	-25.10

Table 7-32. Radiated Measurements MIMO

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5600MHz
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11160.00	Average	V	120	229	-71.72	13.56	0.00	48.84	53.98	-5.14
* 11160.00	Peak	V	120	229	-66.71	13.56	0.00	53.85	73.98	-20.13
16740.00	Peak	V	-	-	-71.72	16.45	0.00	51.73	68.20	-16.47
* 22320.00	Average	V	-	-	-63.50	-3.34	-9.54	30.62	53.98	-23.36
* 22320.00	Peak	V	-	-	-51.55	-3.34	-9.54	42.57	73.98	-31.41
27900.00	Peak	V	-	-	-50.51	-2.26	-9.54	44.68	68.20	-23.52

Table 7-33. Radiated Measurements MIMO

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 322 of 344	

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5720MHz
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11440.00	Average	V	150	0	-76.02	14.58	0.00	45.56	53.98	-8.42
* 11440.00	Peak	V	150	0	-66.93	14.58	0.00	54.65	73.98	-19.33
17160.00	Peak	V	-	-	-72.09	17.92	0.00	52.83	68.20	-15.37
* 22880.00	Average	V	-	-	-63.46	-3.38	-9.54	30.62	53.98	-23.36
* 22880.00	Peak	V	-	-	-52.07	-3.38	-9.54	42.01	73.98	-31.97
28600.00	Peak	V	-	-	-51.51	-2.02	-9.54	43.93	68.20	-24.27

Table 7-34. Radiated Measurements MIMO

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11490.00	Average	V	163	125	-75.95	14.30	0.00	45.35	53.98	-8.63
* 11490.00	Peak	V	163	125	-69.67	14.30	0.00	51.63	73.98	-22.35
17235.00	Peak	V	-	-	-71.35	18.54	0.00	54.19	68.20	-14.01
* 22980.00	Average	V	-	-	-63.21	-3.46	-9.54	30.79	53.98	-23.19
* 22980.00	Peak	V	-	-	-51.73	-3.46	-9.54	42.27	73.98	-31.71
28725.00	Peak	V	-	-	-51.29	-2.02	-9.54	44.14	69.20	-25.06

Table 7-35. Radiated Measurements MIMO

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 323 of 344	

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5785MHz
Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	V	159	127	-74.23	14.11	0.00	46.88	53.98	-7.10
* 11570.00	Peak	V	159	127	-66.14	14.11	0.00	54.97	73.98	-19.01
17355.00	Peak	V	-	-	-81.02	19.83	0.00	45.81	68.20	-22.39
23140.00	Peak	V	-	-	-50.70	-3.47	-9.54	43.29	68.20	-24.91
28925.00	Peak	V	-	-	-51.48	-2.31	-9.54	43.67	68.20	-24.53

Table 7-36. Radiated Measurements MIMO

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5825MHz
Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	163	160	-74.64	14.20	0.00	46.56	53.98	-7.42
* 11650.00	Peak	V	163	160	-68.25	14.20	0.00	52.95	73.98	-21.03
17475.00	Peak	V	-	-	-71.85	21.13	0.00	56.28	68.20	-11.92
23300.00	Peak	V	-	-	-51.86	-3.52	-9.54	42.08	68.20	-26.12
29125.00	Peak	V	-	-	-51.52	-1.91	-9.54	44.03	68.20	-24.17

Table 7-37. Radiated Measurements MIMO


FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 324 of 344	

7.6.2 Simultaneous Tx Radiated Spurious Emissions Measurements


§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1+2	3+4+5+6
Channel	6	100
Operating Frequency (MHz)	2437	5500
Data Rate (Mbps)	1Mbps	6Mbps
Mode	B	a

Table 7-38. Simultaneous Transmission Config-1

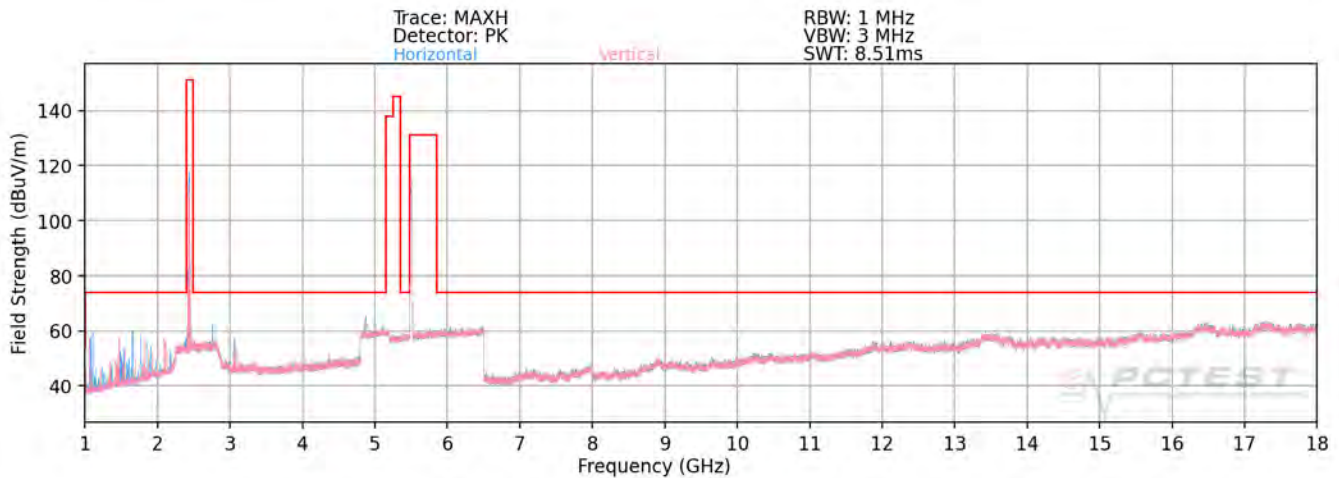


Plot 7-555. Radiated Spurious Plot above 1GHz (2.4GHz – 5GHz)

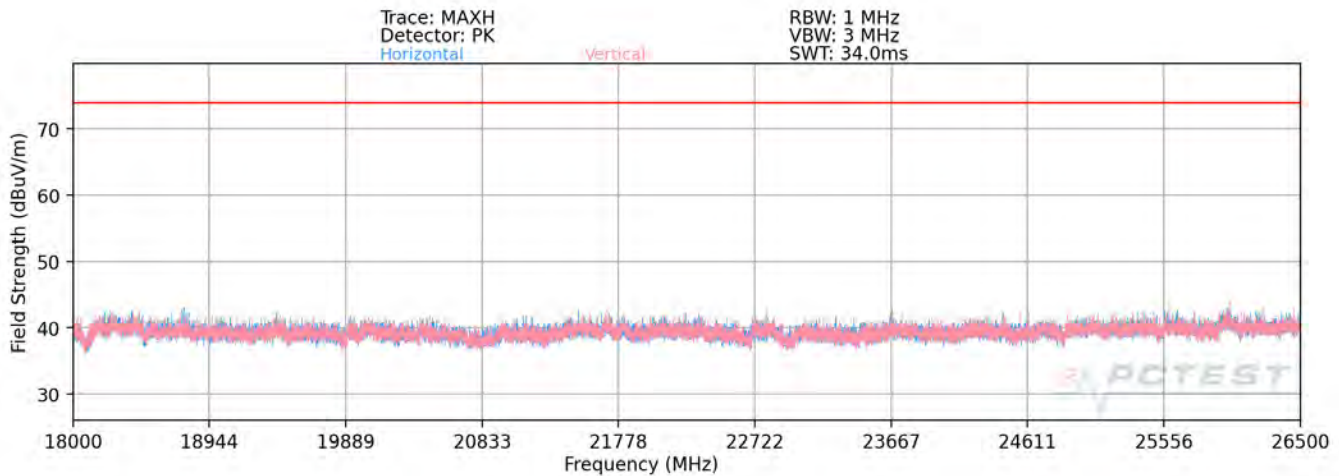

Plot 7-556. Radiated Spurious Plot 18GHz – 26.5GHz (2.4GHz – 5GHz)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 325 of 344

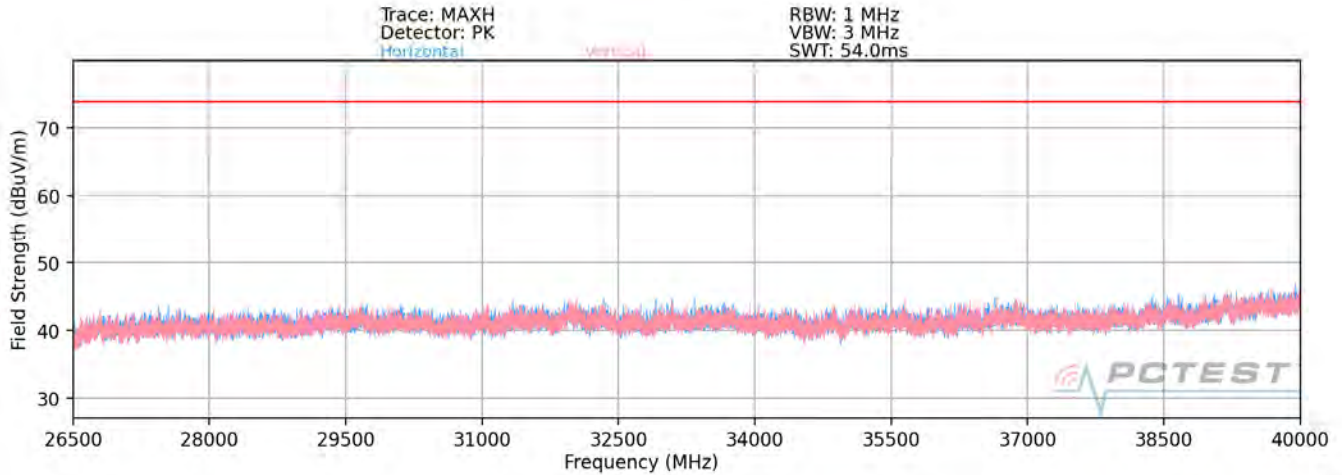

Plot 7-557. Radiated Spurious Plot above 26.5GHz (2.4GHz – 5GHz)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
626.00	Peak	H	140	156	-81.77	-6.19	19.04	46.00	-26.96
* 3689.00	Aerage	H	-	-	-80.73	-6.19	20.08	53.98	-33.89
* 3689.00	Peak	H	-	-	-69.38	8.01	45.63	73.98	-28.35
6752.00	Peak	H	-	-	-71.45	8.01	43.56	68.20	-24.64
8563.00	Peak	H	-	-	-72.51	14.42	48.91	68.20	-19.29
9815.00	Peak	H	-	-	-71.71	16.85	52.14	68.20	-16.06
14689.00	Peak	H	-	-	-74.03	22.82	55.79	68.20	-12.41
* 17752.00	Aerage	H	-	-	-85.47	27.76	49.29	53.98	-4.69
* 17752.00	Peak	H	-	-	-73.35	32.28	65.93	68.20	-2.27

Table 7-39. Radiated Measurements (ANT1+2 2.4GHz – ANT3+4+5+6 5GHz)


FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 326 of 344	

7.6.3 MIMO Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36




Plot 7-558. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)

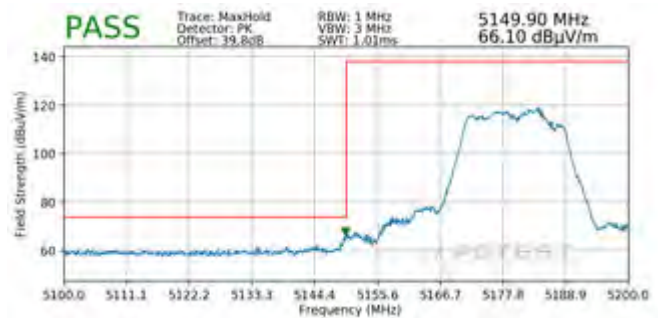


Plot 7-559. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5320MHz
Channel:	64

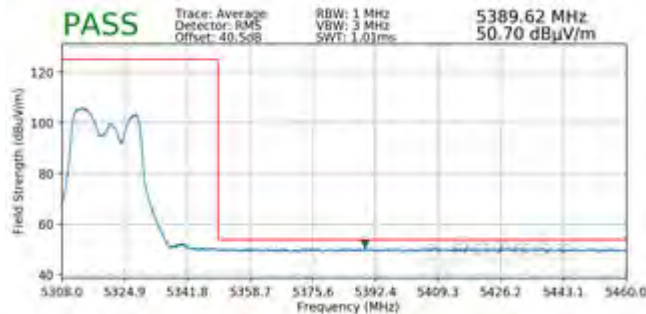


Plot 7-560. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)

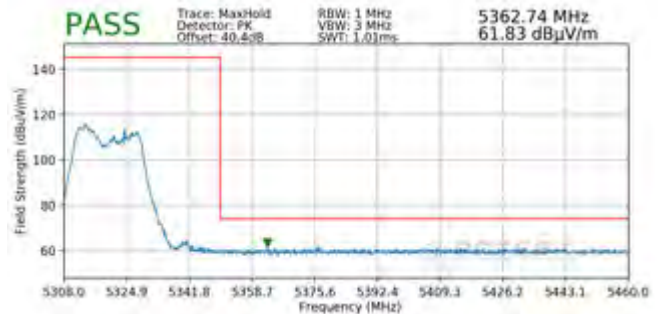


Plot 7-561. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 327 of 344

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

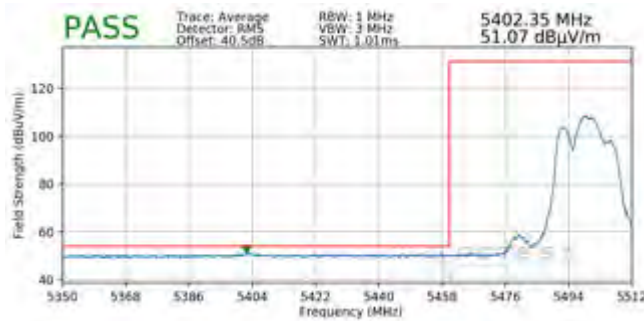


Plot 7-562. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)

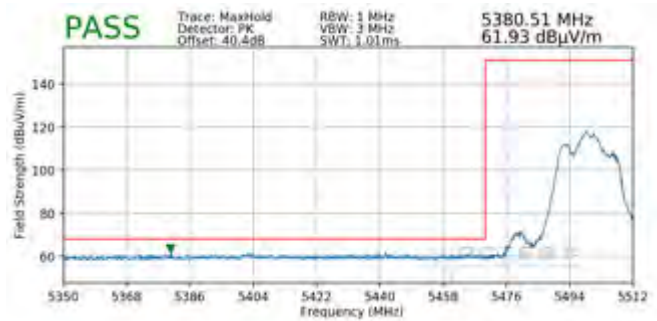

Plot 7-563. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

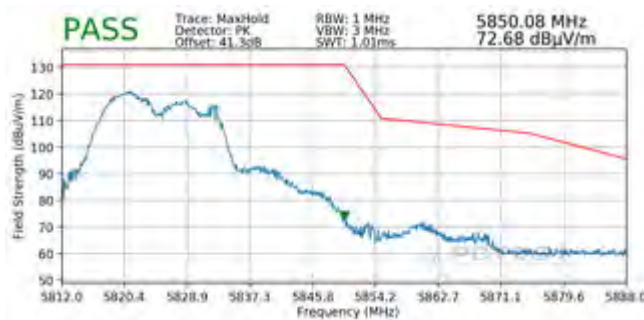


Plot 7-564. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)


FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 328 of 344

7.6.4 MIMO Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5190MHz
Channel:	38

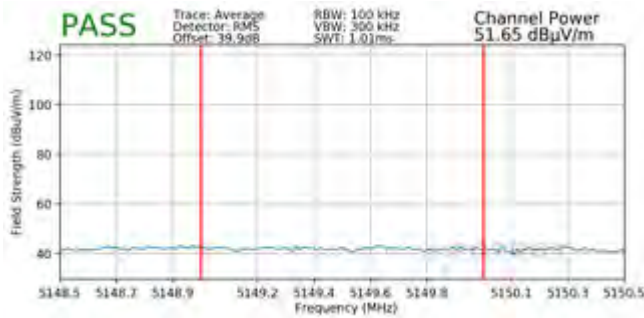


Plot 7-565. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)

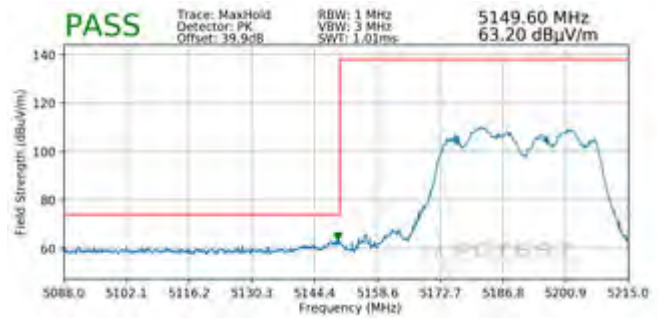

Plot 7-566. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5310MHz
Channel:	62

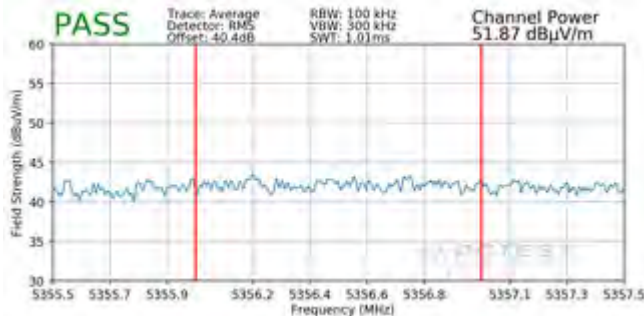


Plot 7-567. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)




Plot 7-568. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 329 of 344

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

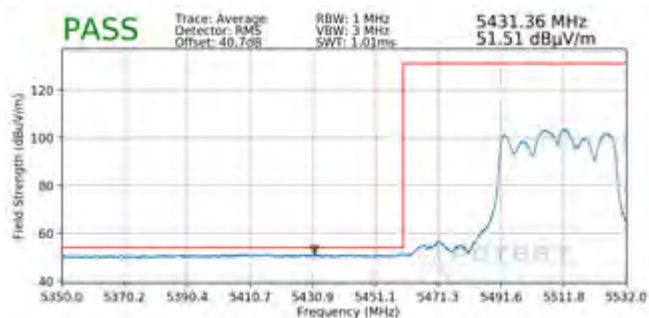


Plot 7-569. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)

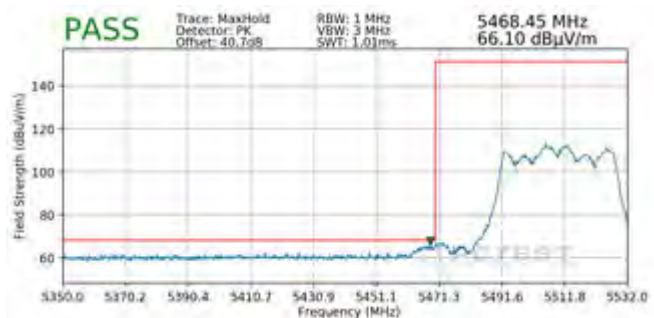

Plot 7-570. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

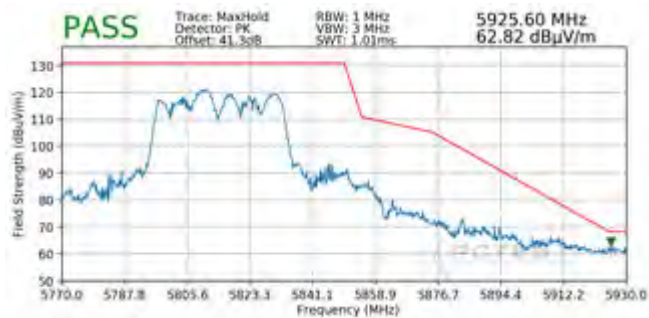


Plot 7-571. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)


FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08-A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 330 of 344

7.6.5 MIMO Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz
Channel:	42

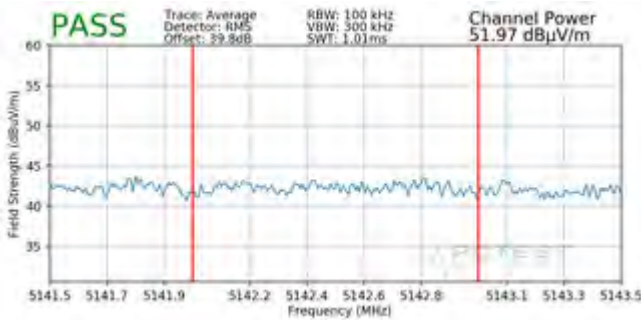


Plot 7-572. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)

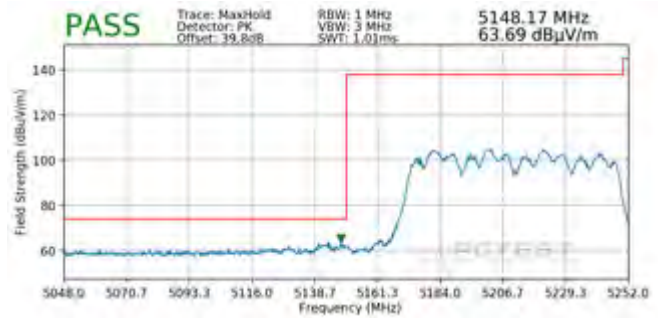


Plot 7-573. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode:	802.11ac
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5290MHz
Channel:	58

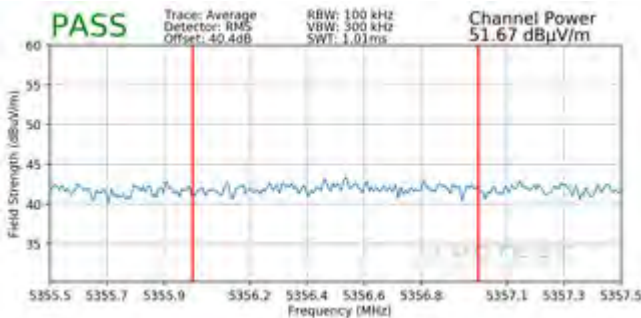


Plot 7-574. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)

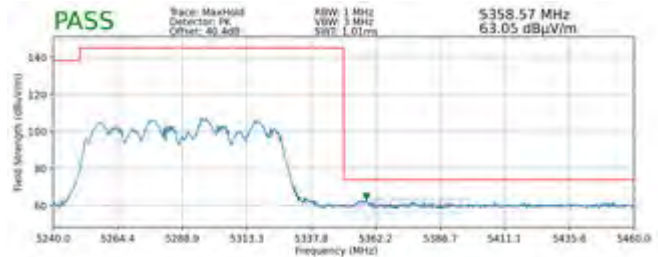


Plot 7-575. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 331 of 344

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

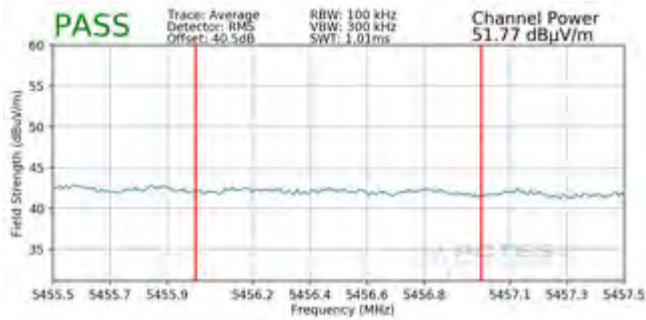


Plot 7-576. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 2C)

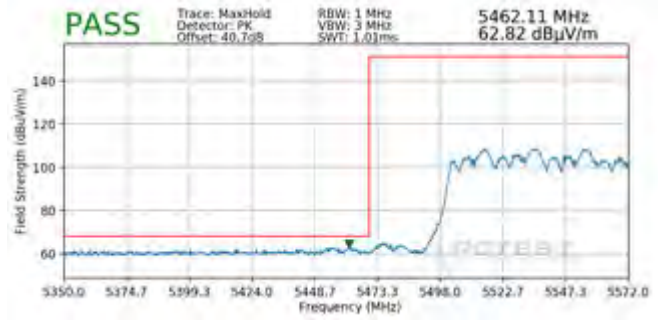

Plot 7-577. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 2C)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

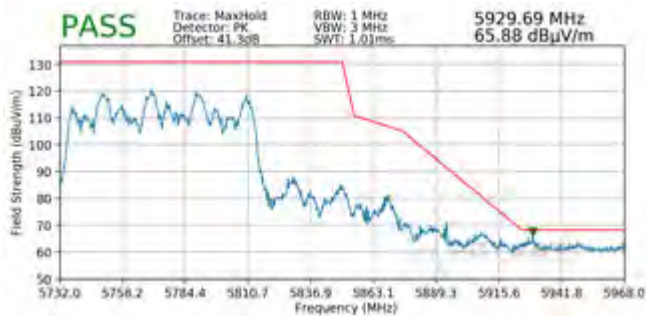


Plot 7-578. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 3)


FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 332 of 344

7.6.6 MIMO Radiated Band Edge Measurements (80+80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5210MHz+5290MHz
Channel:	42+58

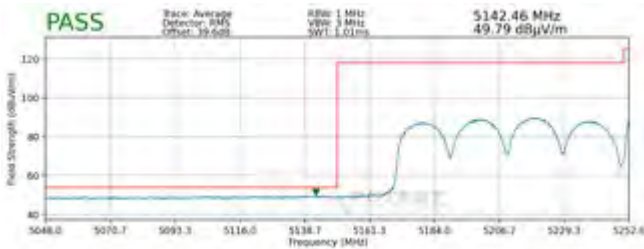


Plot 7-579. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 1)

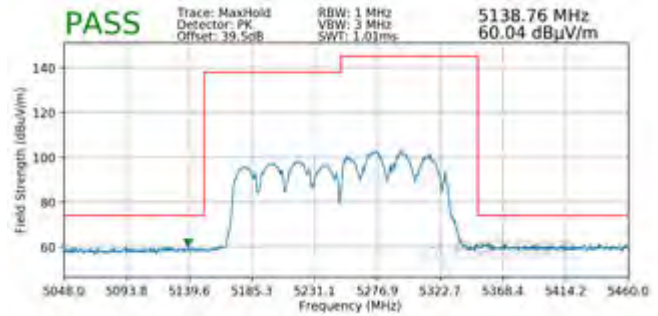


Plot 7-580. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 1)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5530MHz+5610MHz
Channel:	106+122

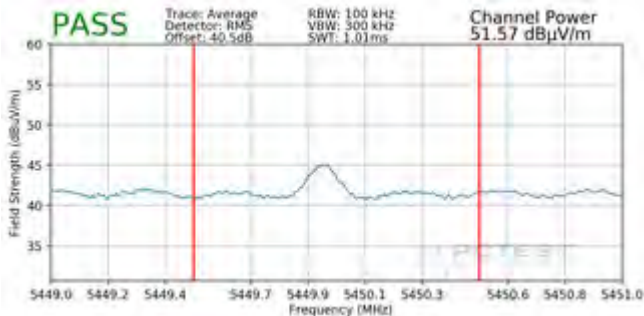

Plot 7-581. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 2A)

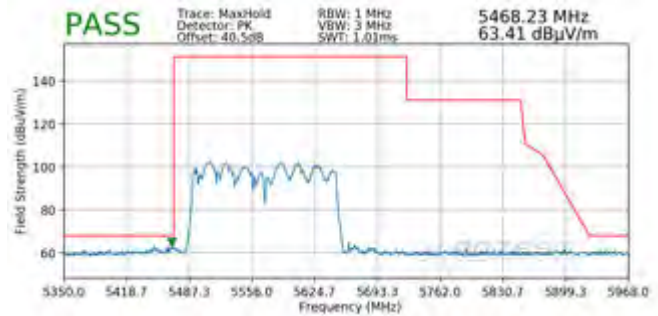

Plot 7-582. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 2A)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 333 of 344

7.7 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-40 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-40. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 334 of 344	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

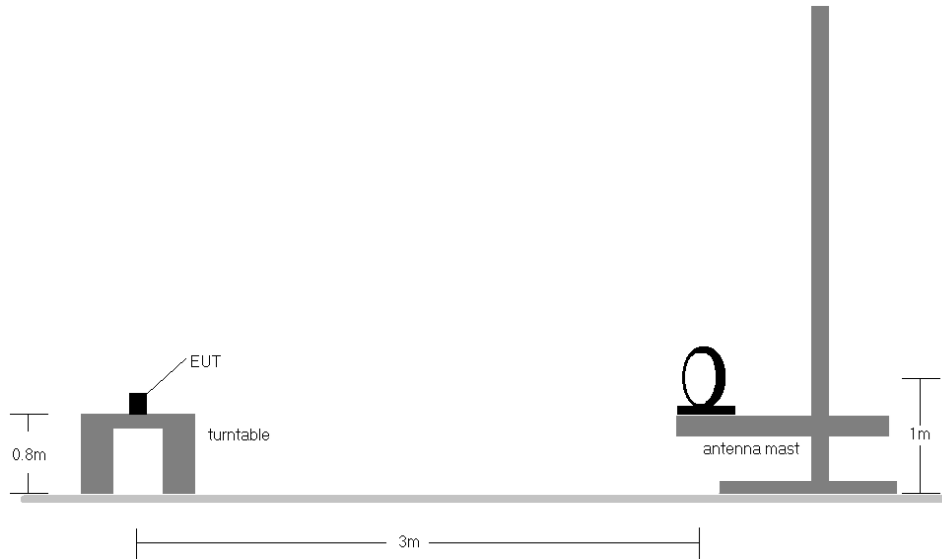


Figure 7-6. Radiated Test Setup < 30MHz

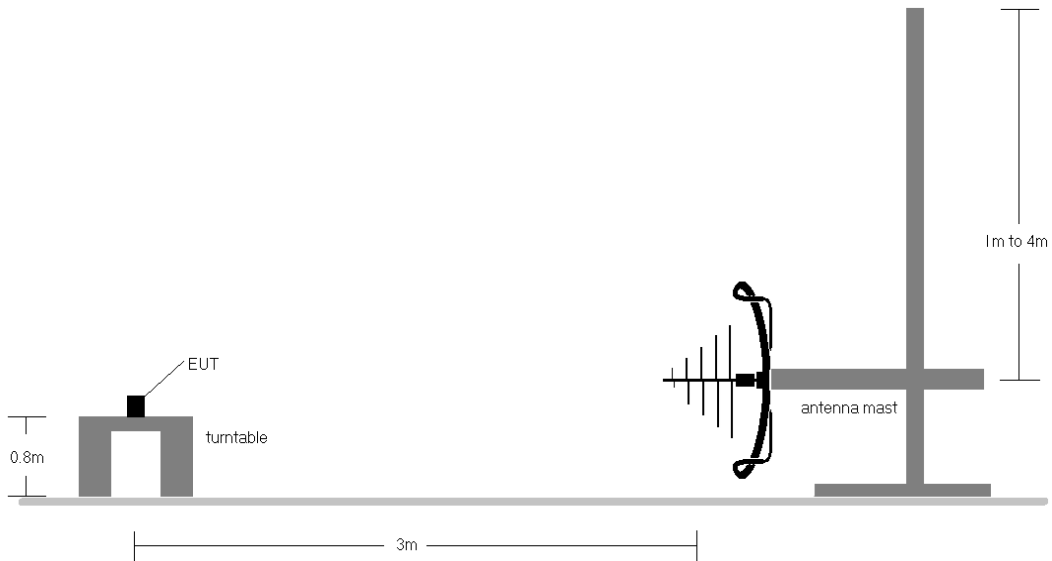


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)	 Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 335 of 344


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-40.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested while powered by an DC power source.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 336 of 344	

Simultaneous Tx Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

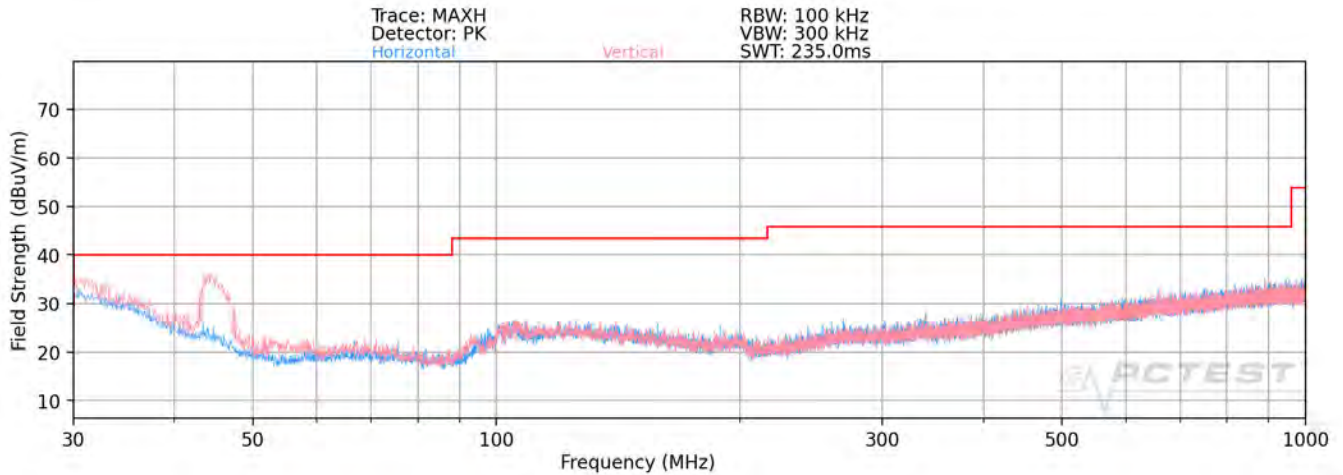

Plot 7-583. Radiated Spurious Plot below 1GHz (Dual Band Simult. Tx)

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
35.82	Quasi-Peak	V	205	14	-92.59	21.71	36.12	40.00	-3.88
43.78	Quasi-Peak	V	157	347	-88.76	16.19	34.43	40.00	-5.57
94.41	Quasi-Peak	V	230	100	-89.51	14.26	31.75	43.52	-11.77
138.11	Quasi-Peak	V	227	188	-91.65	18.23	33.58	43.52	-9.94
281.31	Quasi-Peak	V	236	87	-90.46	18.01	34.55	46.02	-11.47
822.37	Quasi-Peak	V	236	294	-89.45	25.16	42.71	46.02	-3.31

Table 7-41. Radiated Measurements below 1GHz

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 337 of 344	

7.8 Line-Conducted Test Data

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-42. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 338 of 344	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


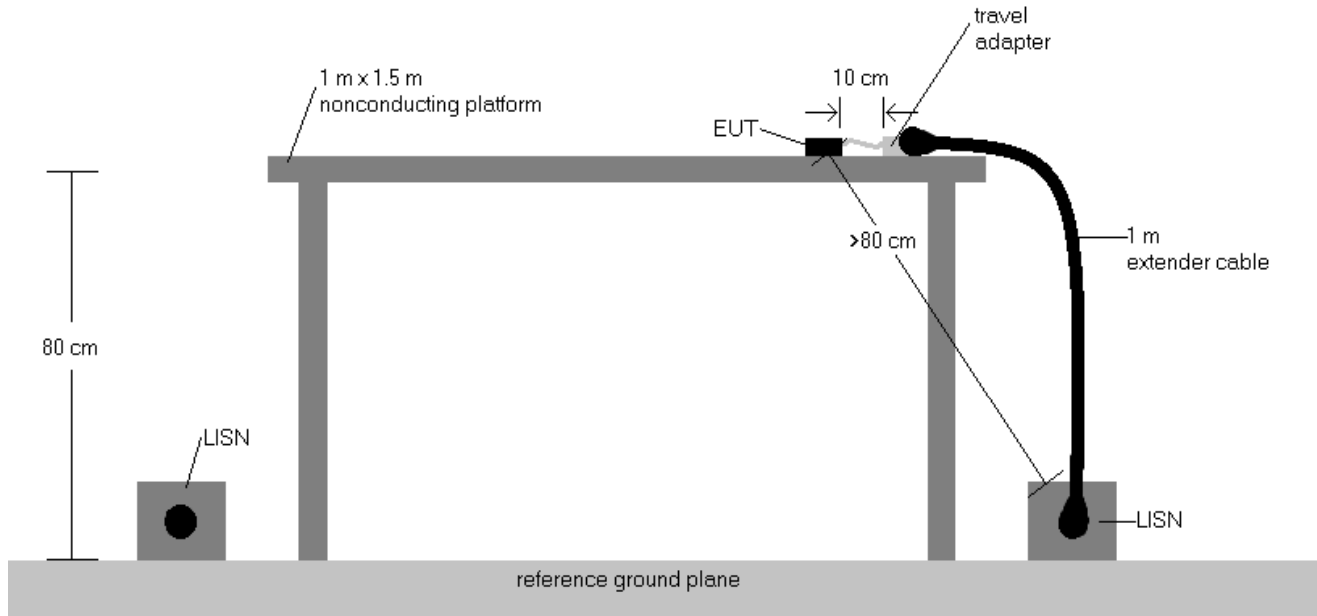


Figure 7-8. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 339 of 344

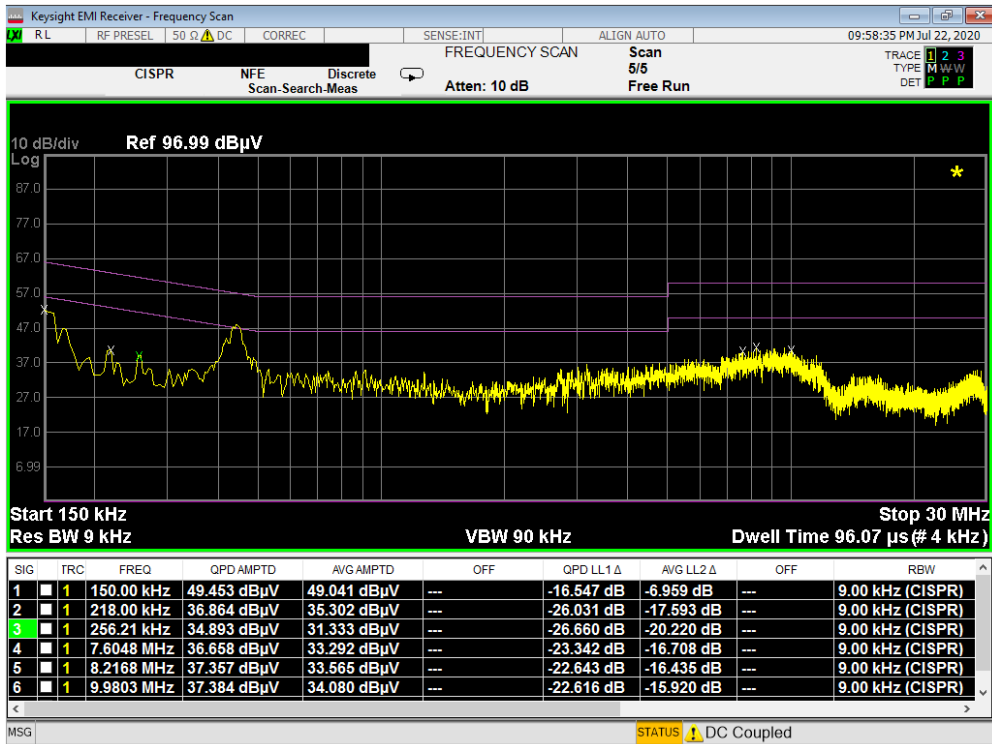


Plot 7-584. Line Conducted Plot with 802.11a UNII Band 1 (L1)

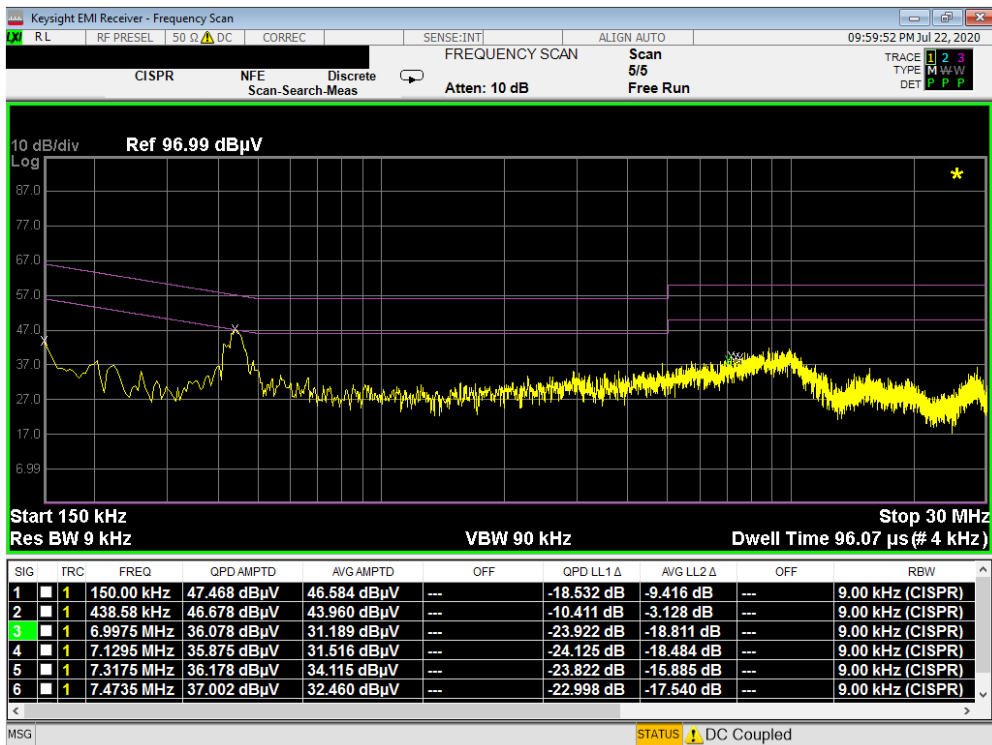


Plot 7-585. Line Conducted Plot with 802.11a UNII Band 1 (N)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 340 of 344

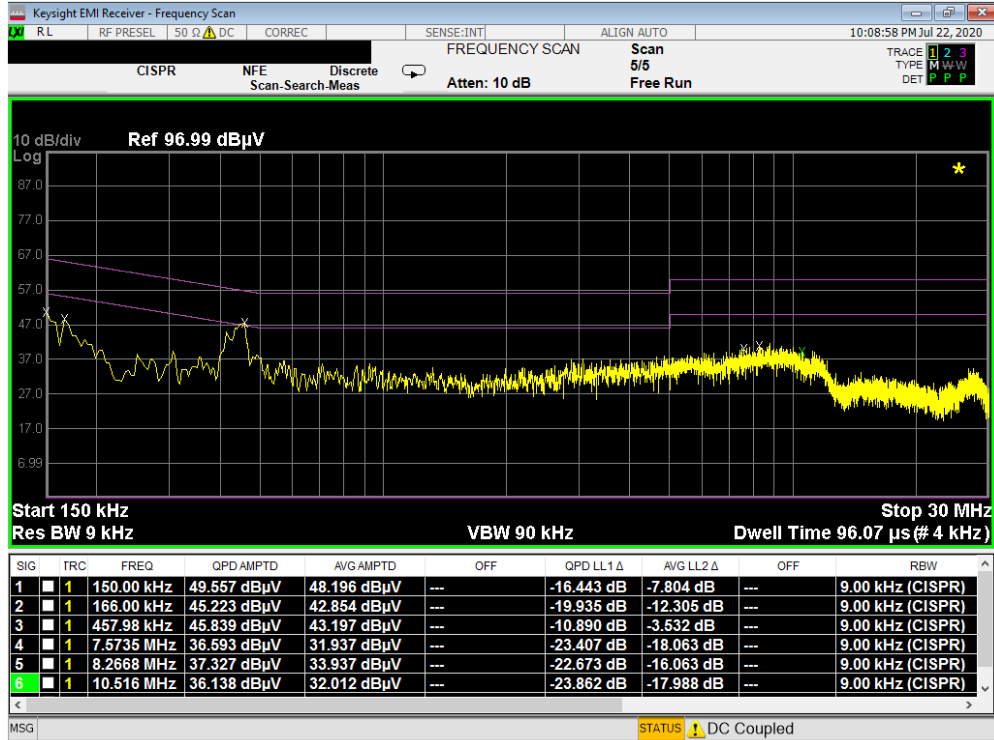


Plot 7-586. Line Conducted Plot with 802.11a UNII Band 2A (L1)

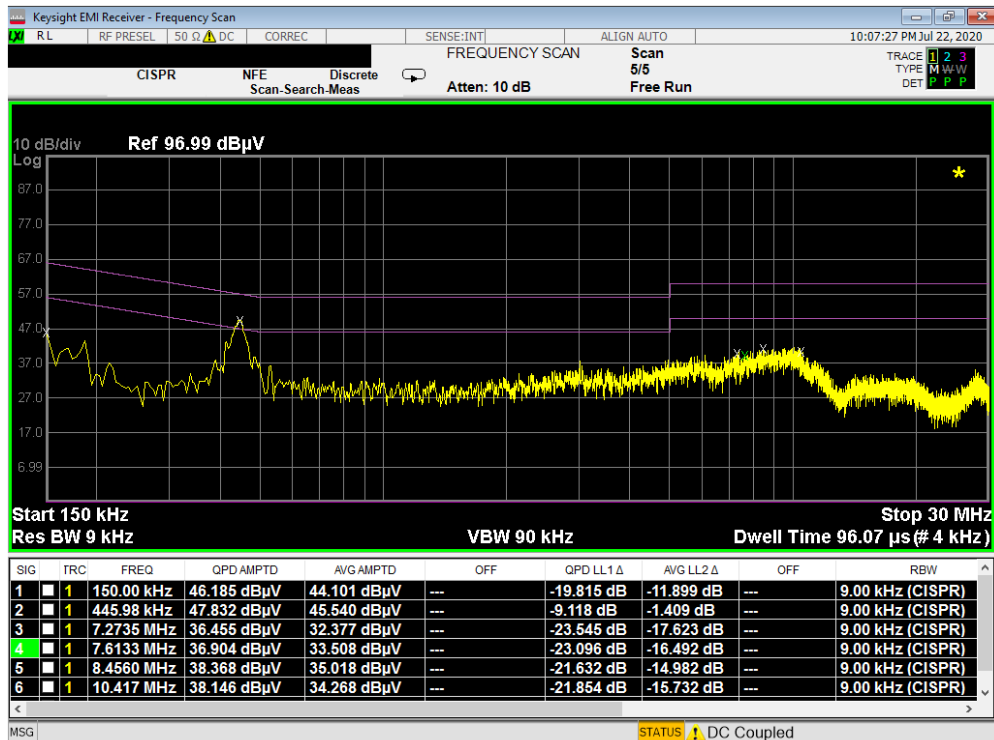


Plot 7-587. Line Conducted Plot with 802.11a UNII Band 2A (N)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 341 of 344

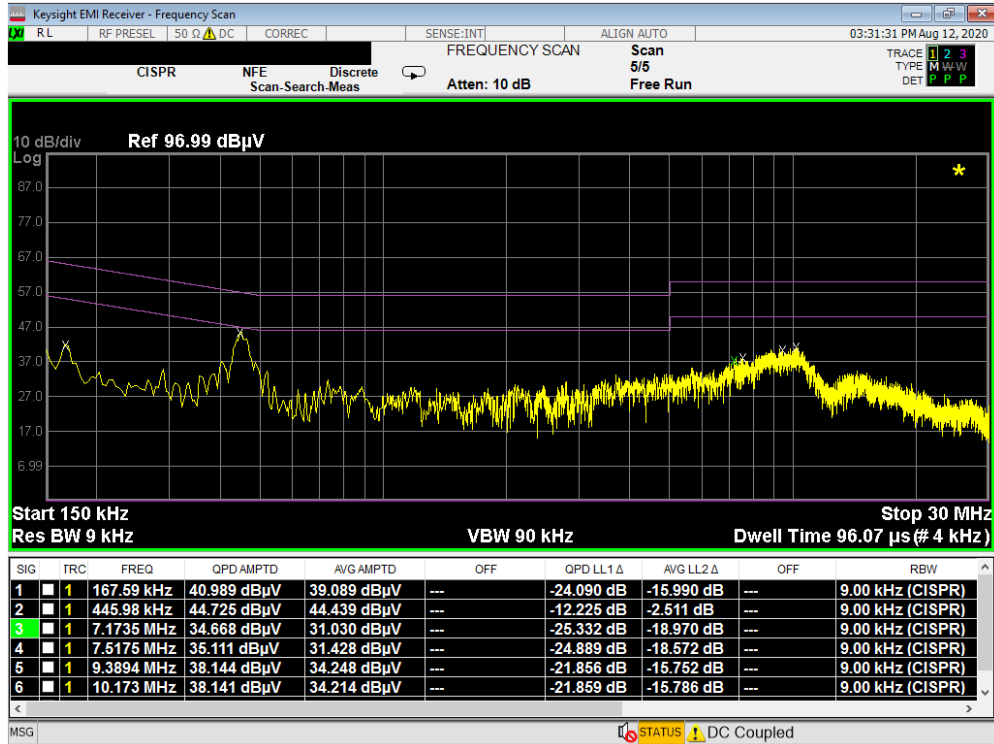


Plot 7-588. Line Conducted Plot with 802.11a UNII Band 2C (L1)

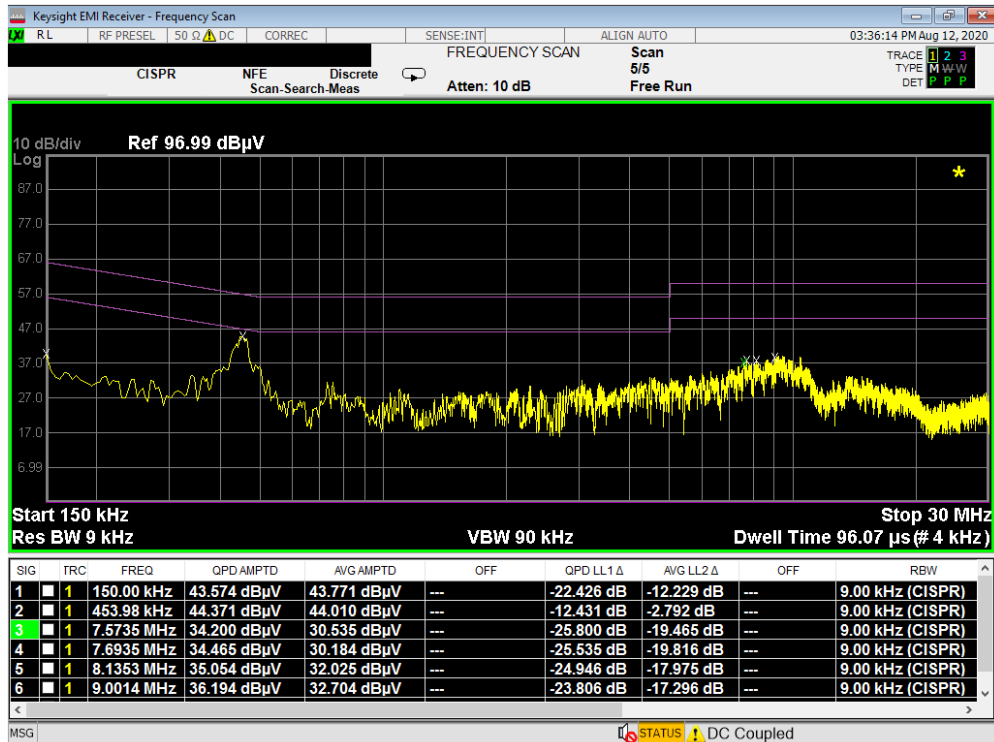


Plot 7-589. Line Conducted Plot with 802.11a UNII Band 2C (N)

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 342 of 344

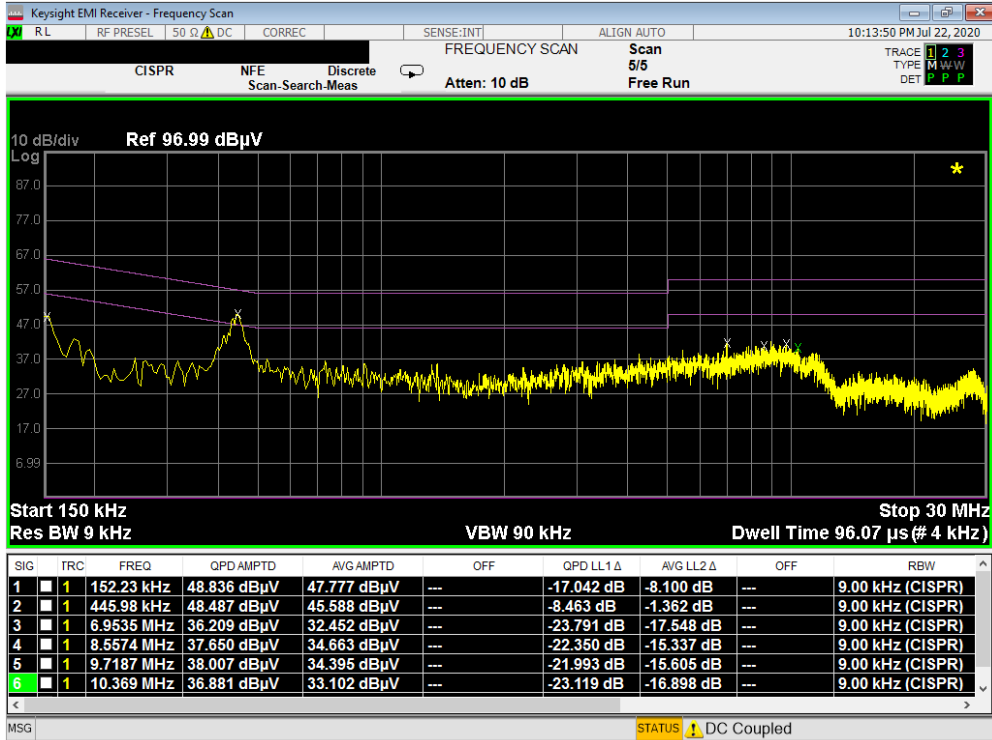

Plot 7-590. Line Conducted Plot with 802.11a UNII Band 3 (L1)

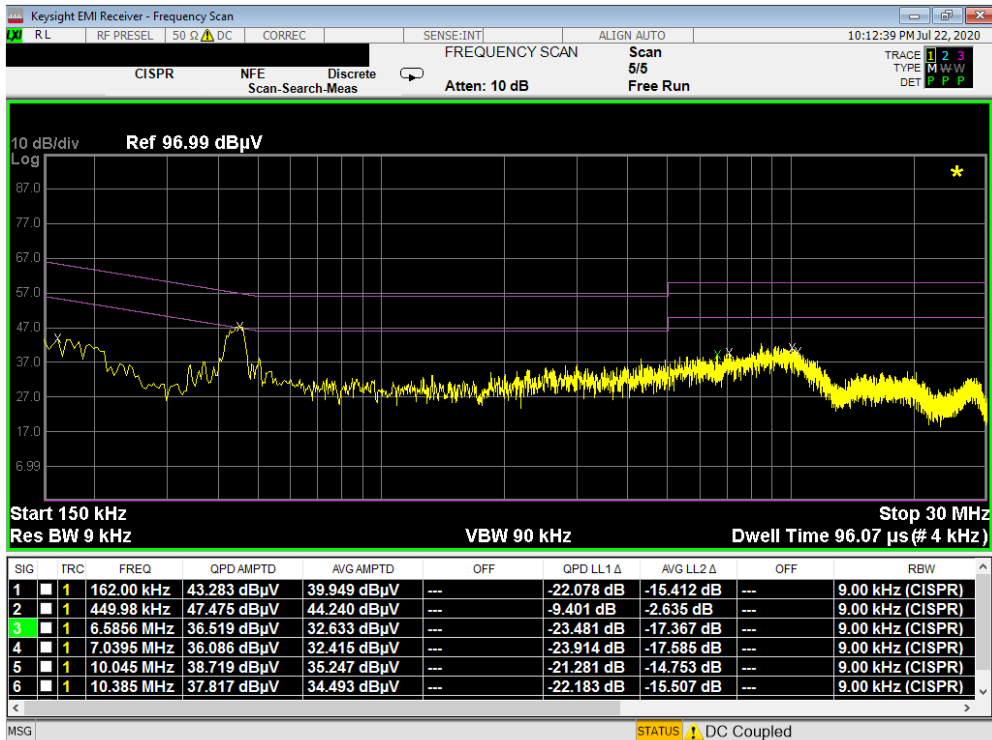

Plot 7-591. Line Conducted Plot with 802.11a UNII Band 3 (N)

FCC ID: A3LSMH204V	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)		Page 343 of 344

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Indoor Customer Premises Equipment (CPE) FCC ID: A3LSMH204V** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

FCC ID: A3LSMH204V		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2004140062-08.A3L	Test Dates: 4/29 - 8/12/2020	EUT Type: Indoor Customer Premises Equipment (CPE)	Page 344 of 344	