






LTE Band 4

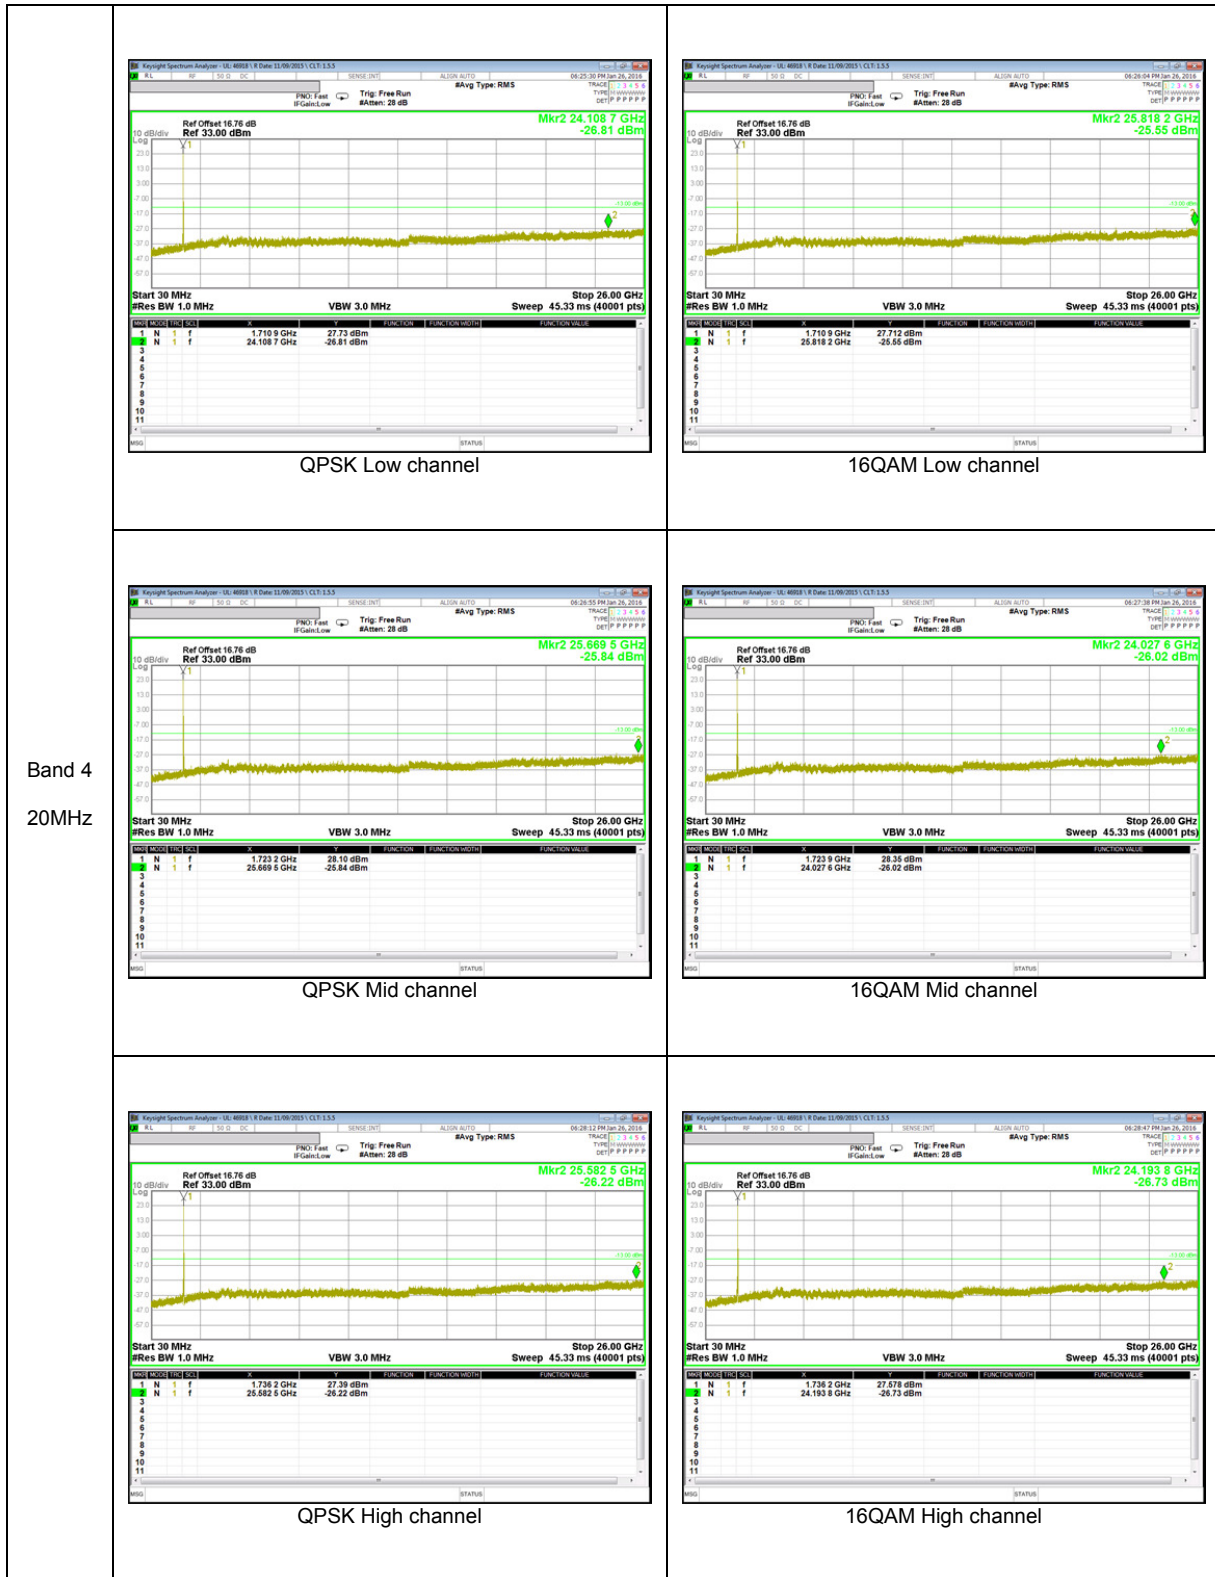


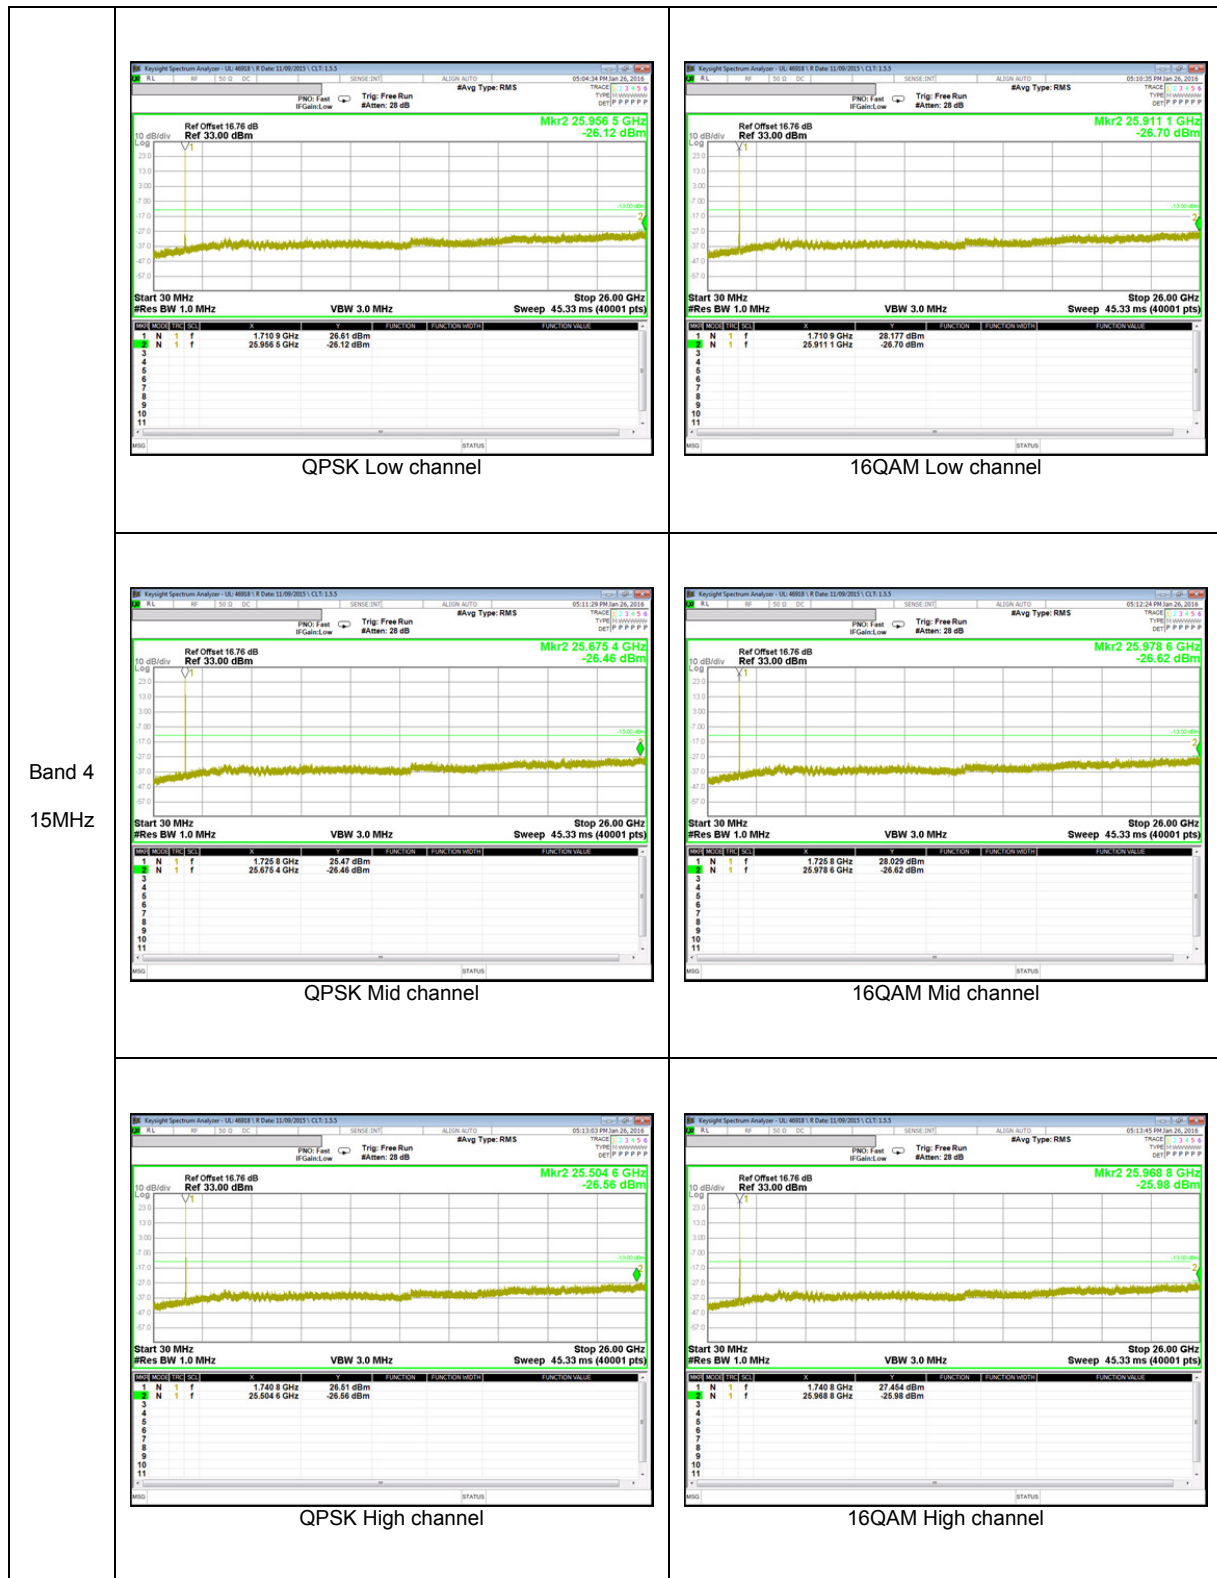

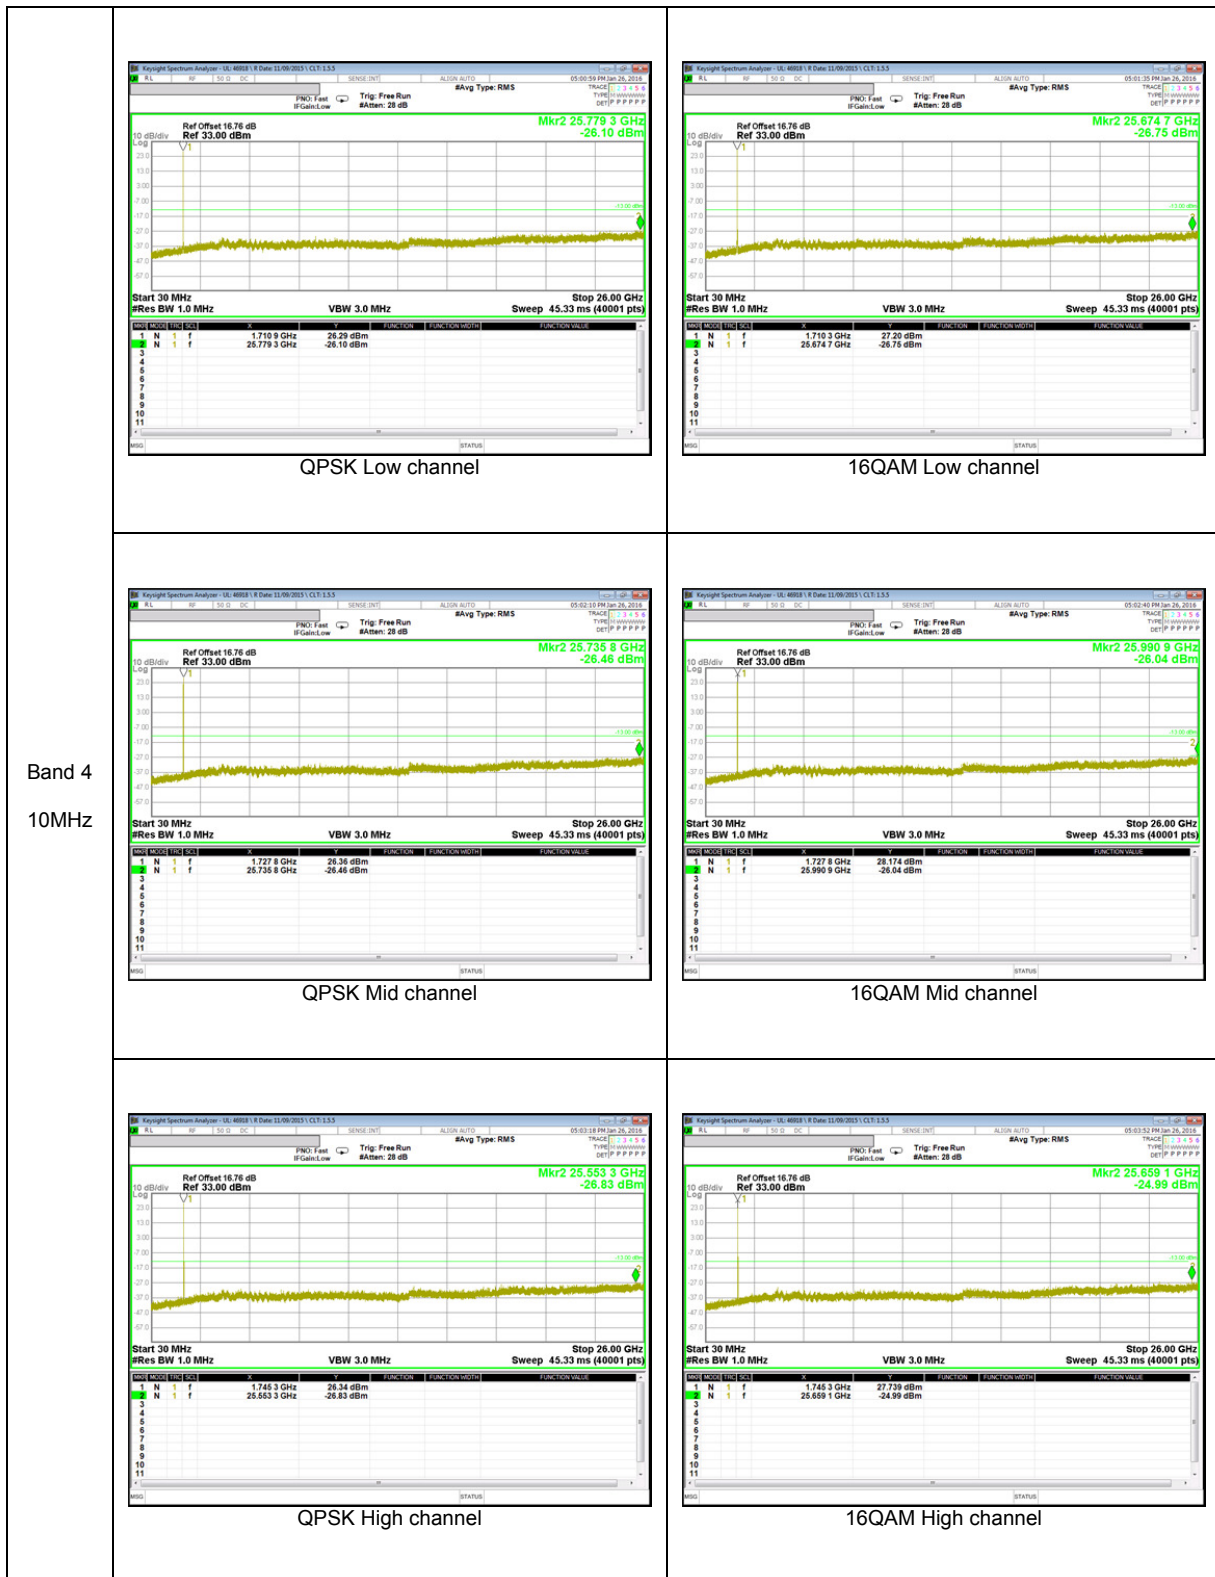


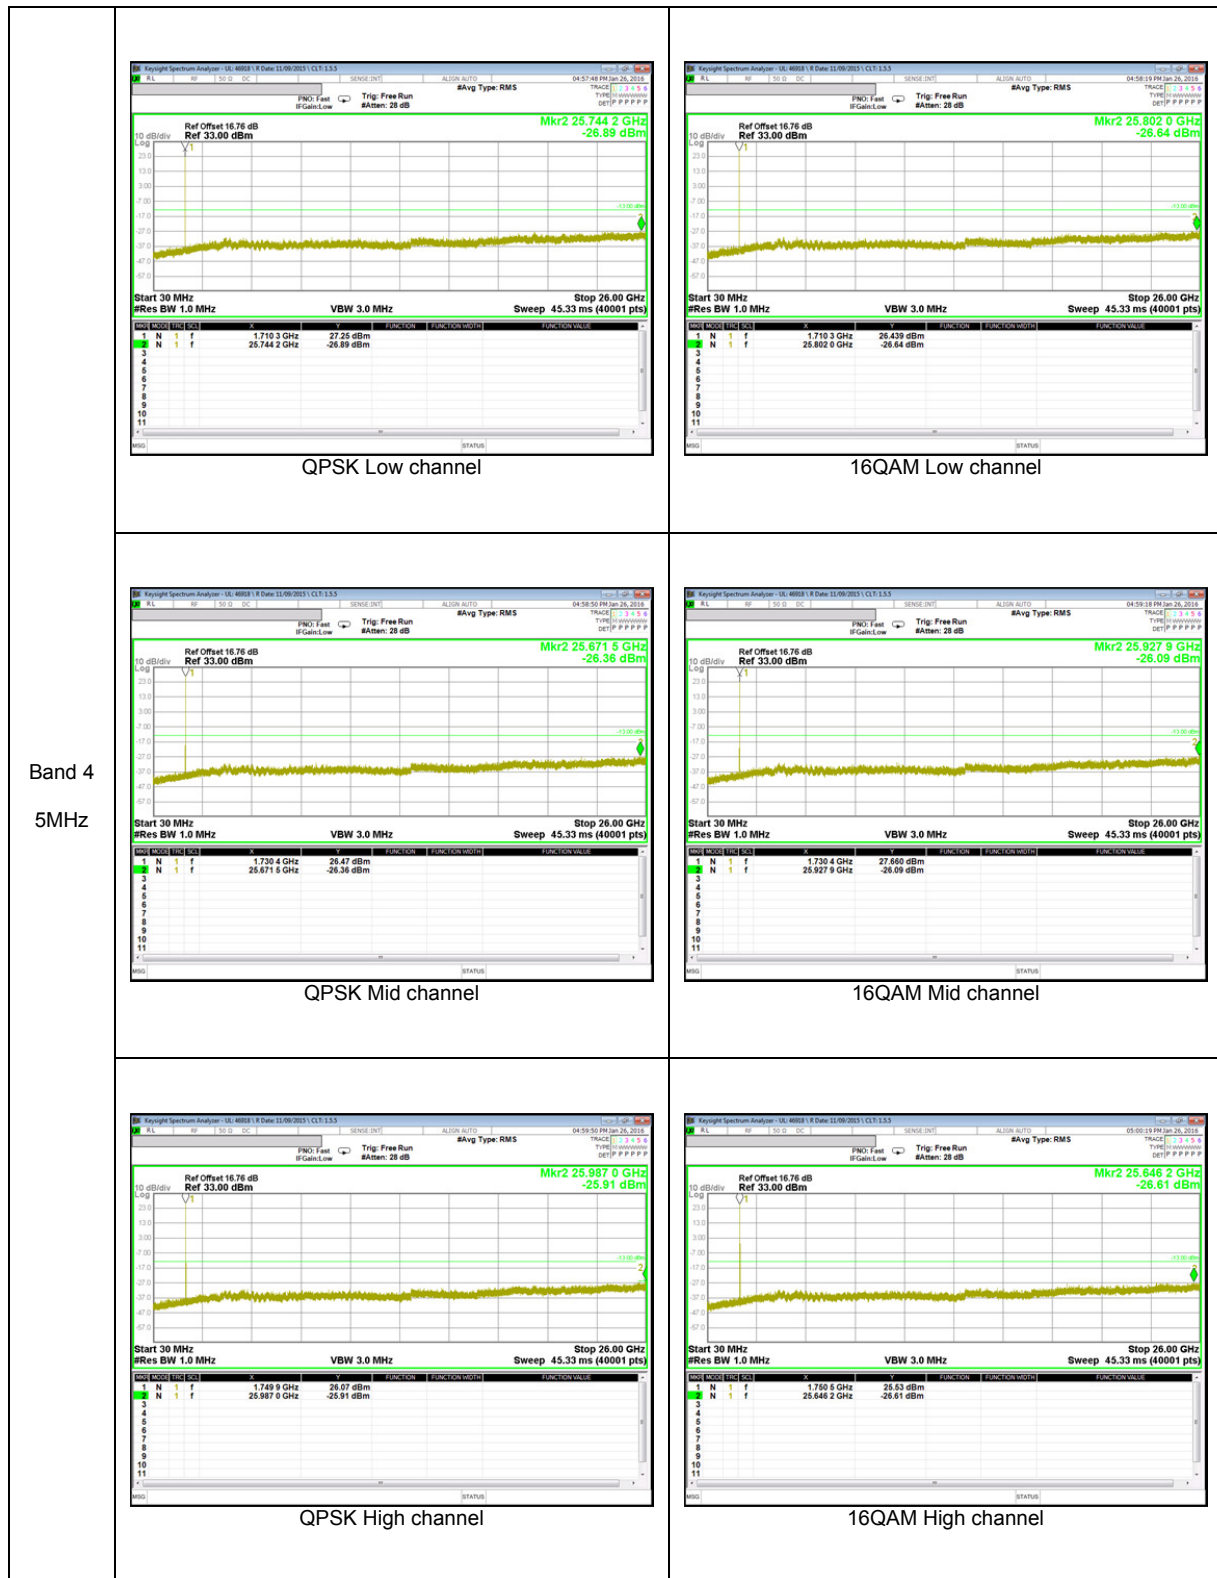


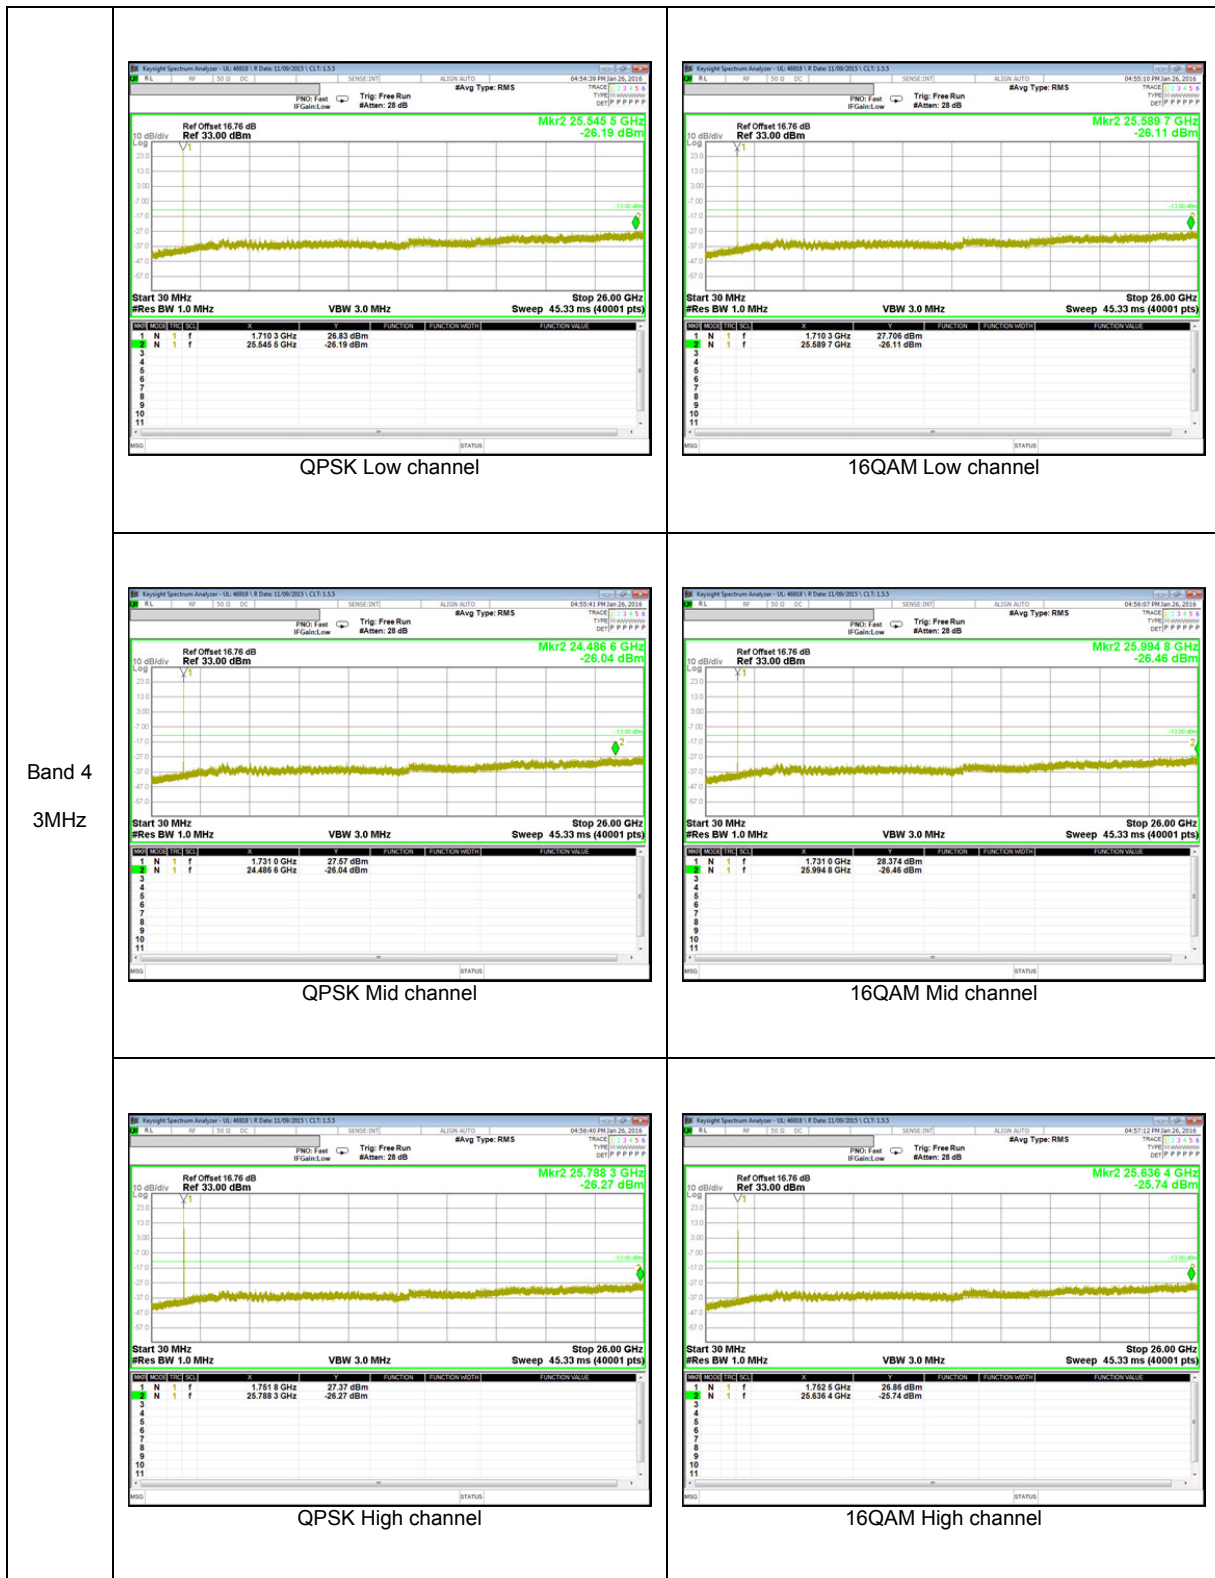


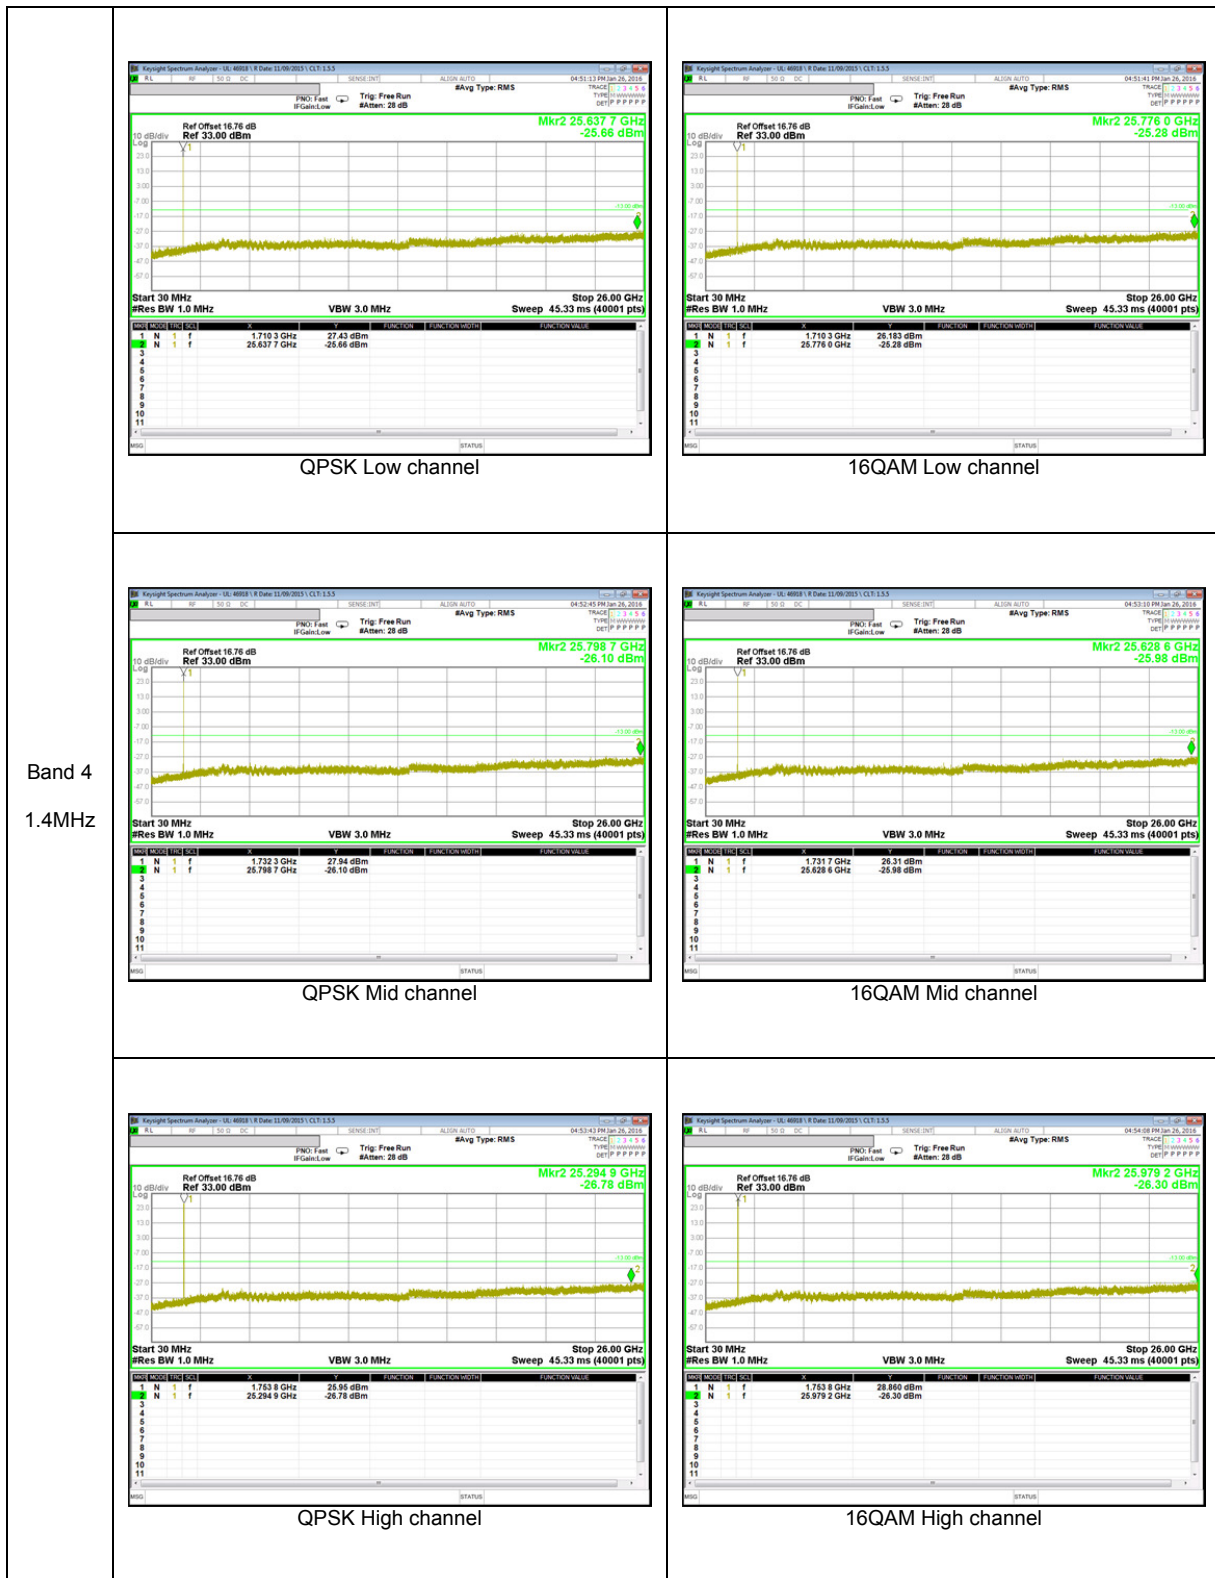



LTE Band 2

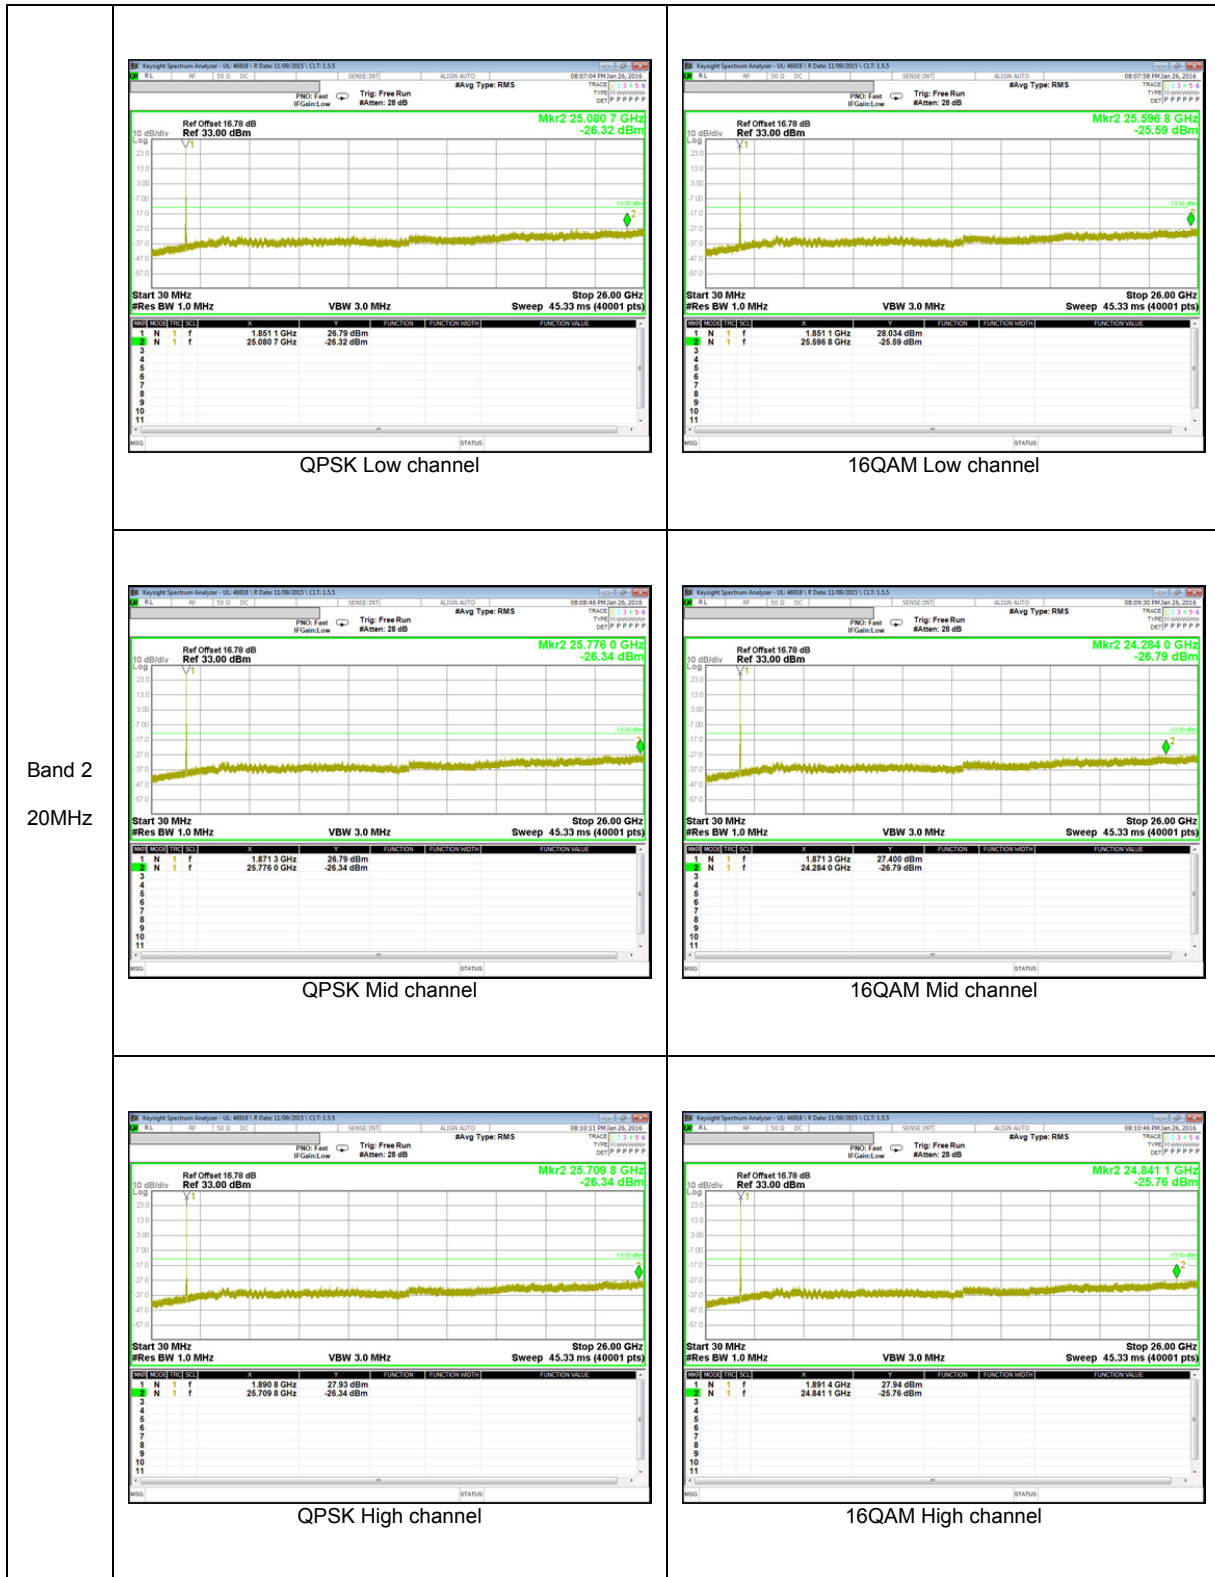


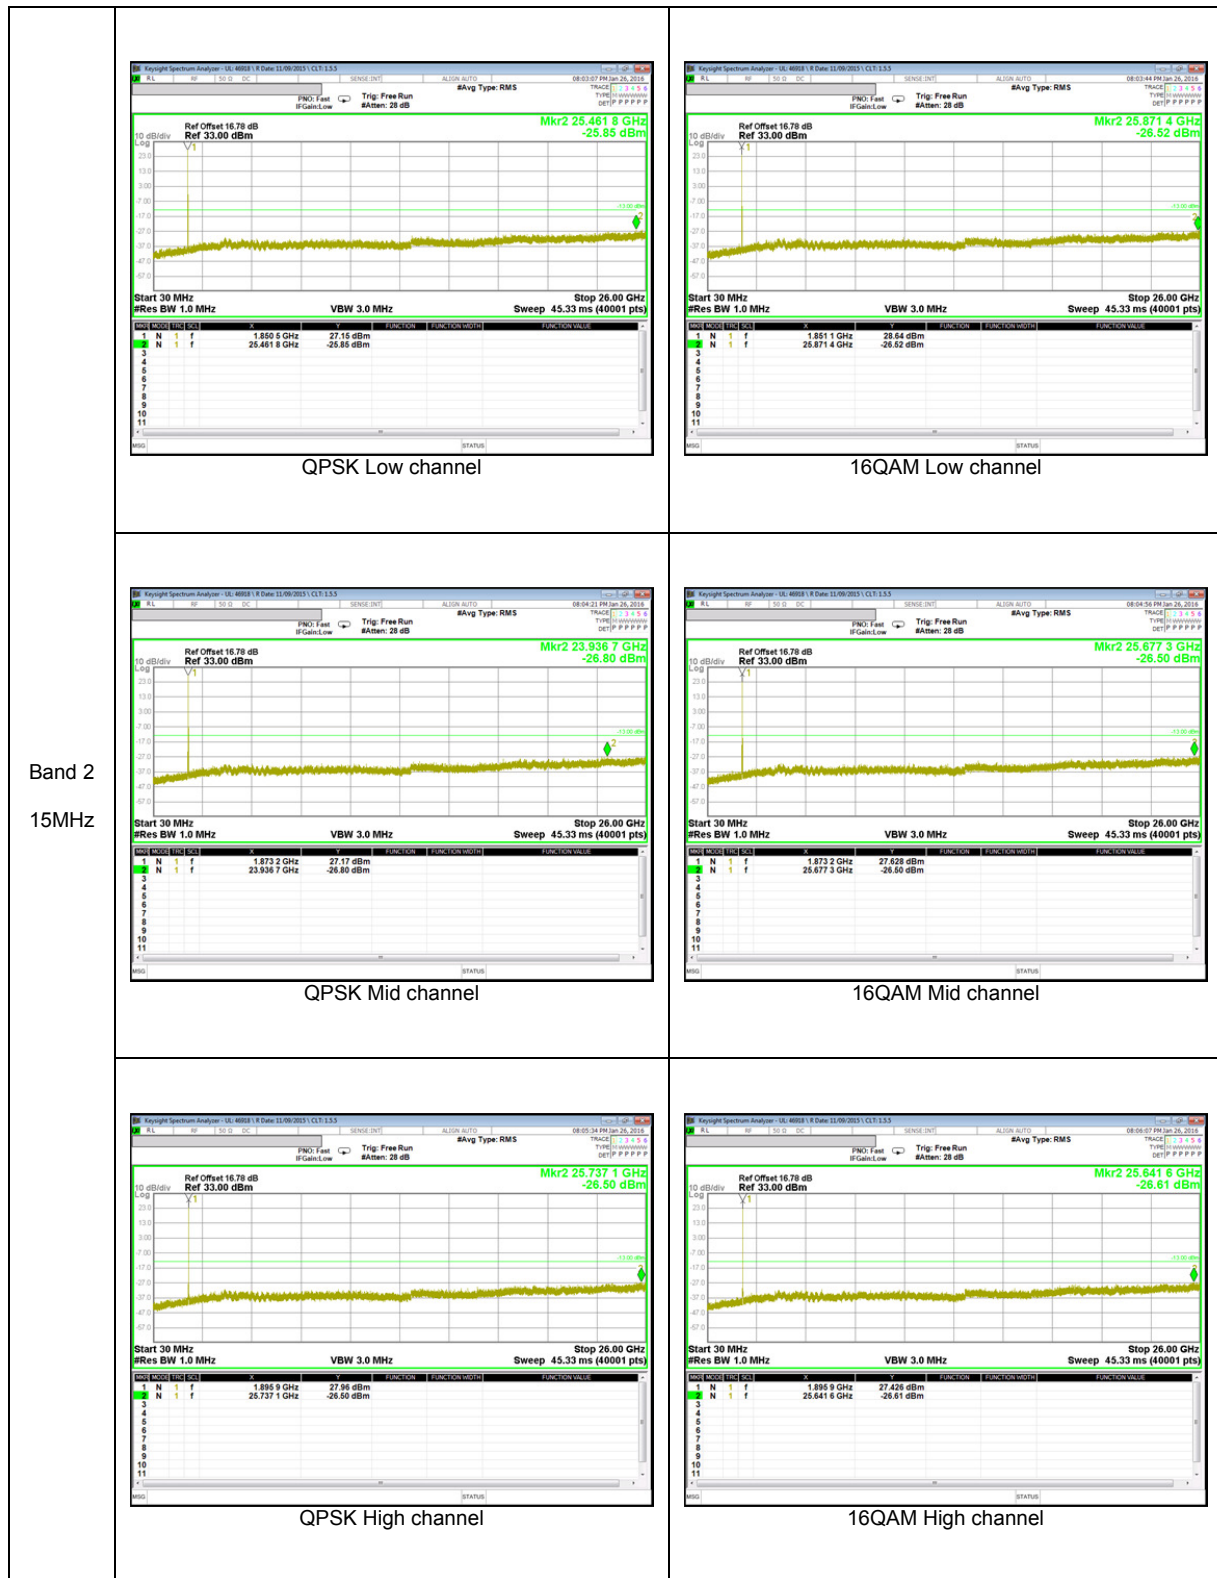

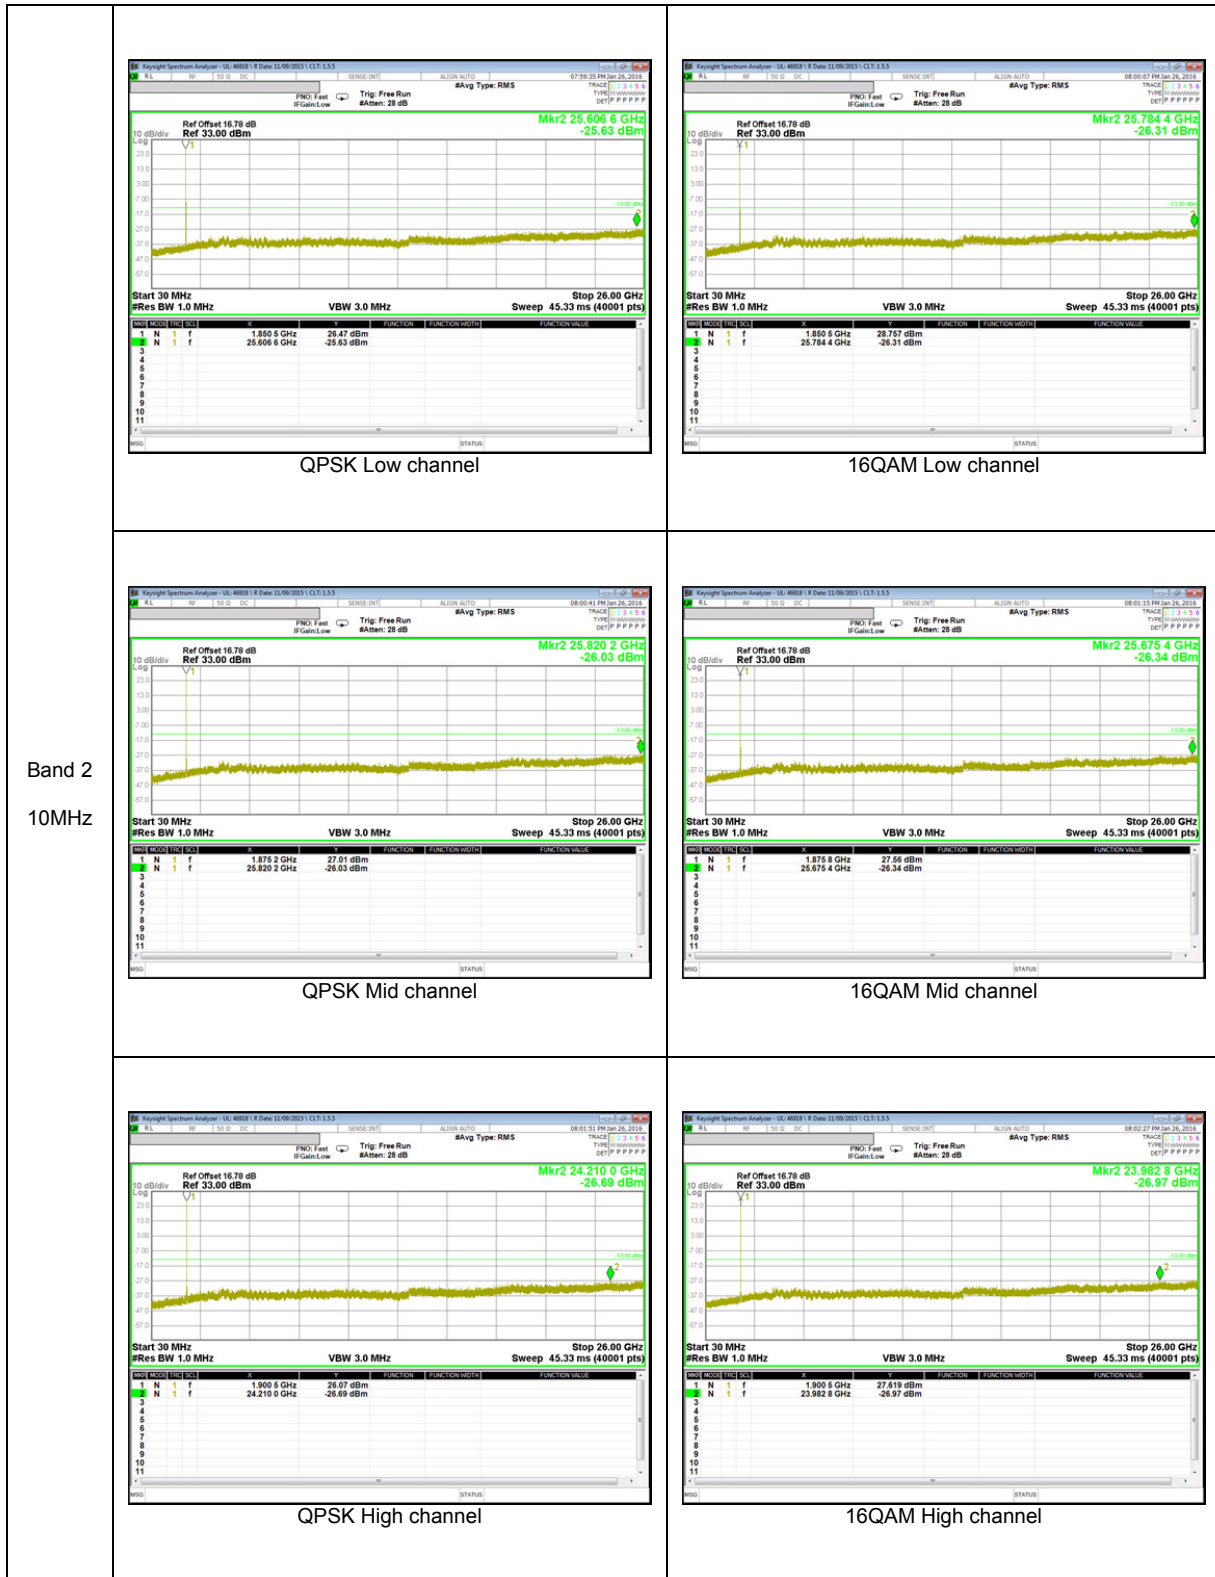

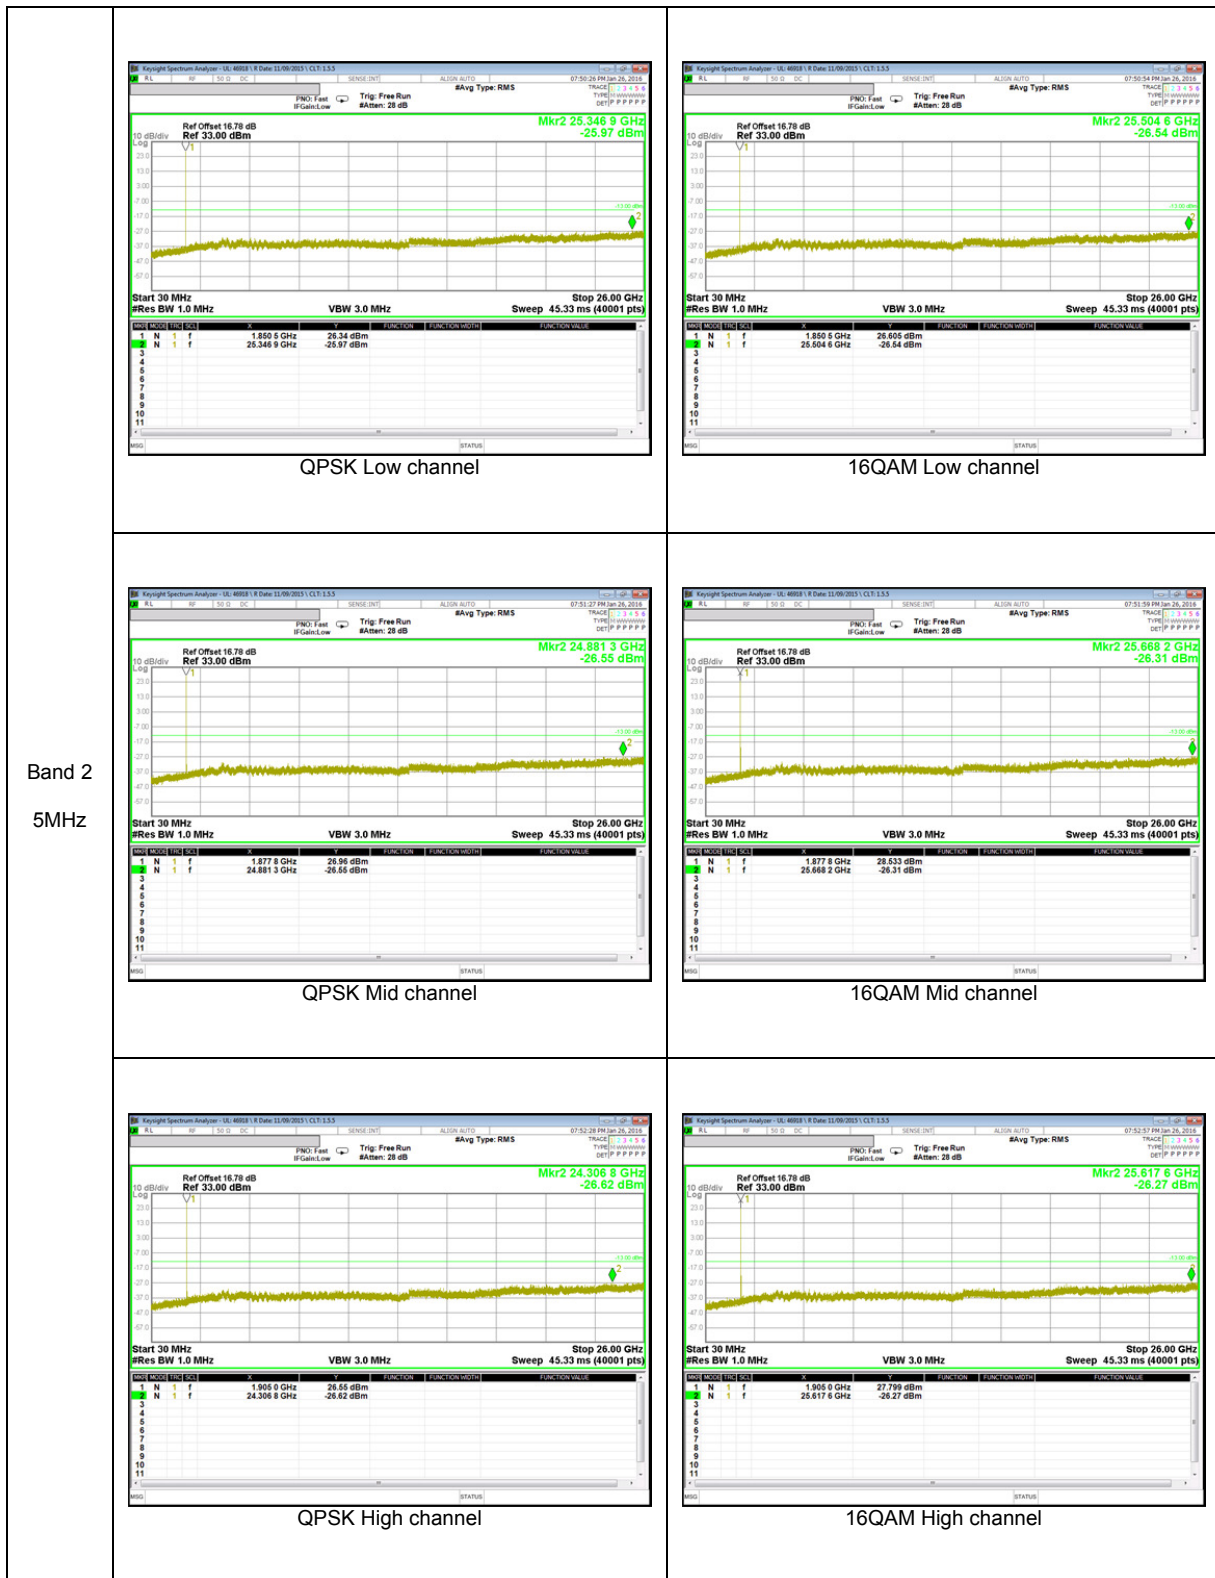

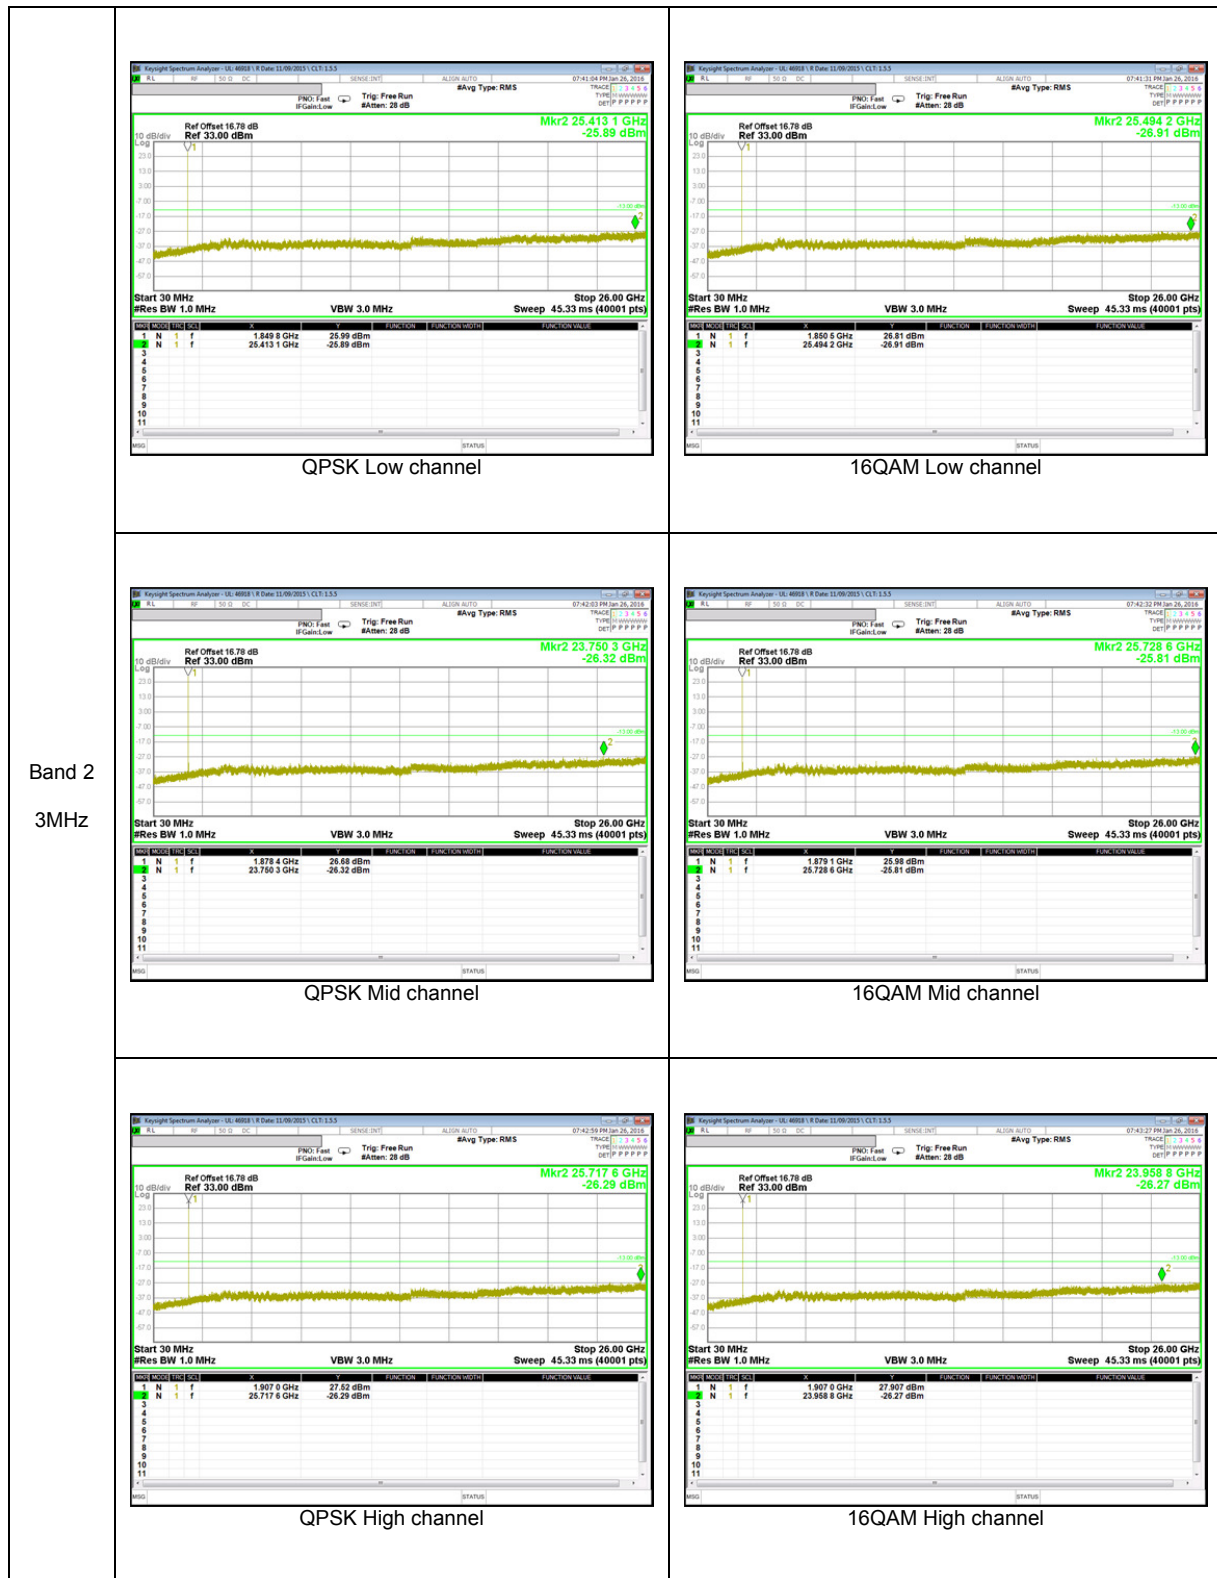

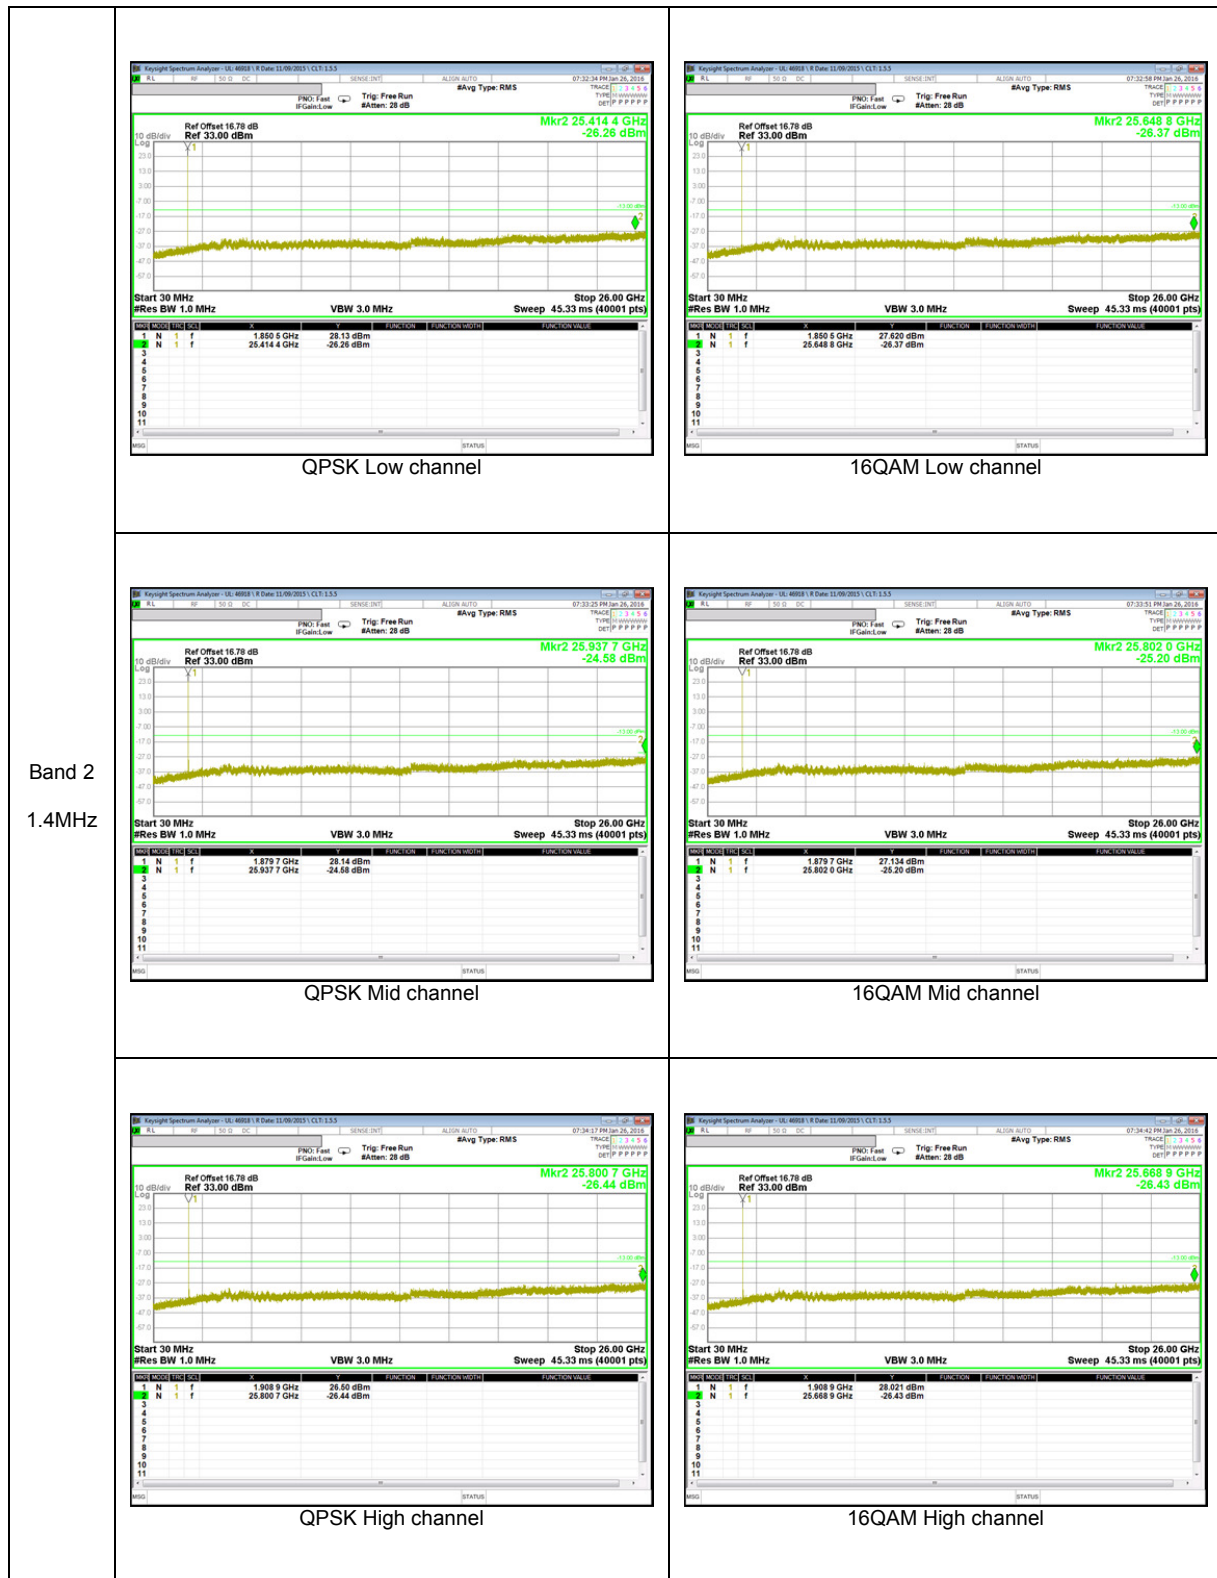

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235 and §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

LTE Band 17, Channel 23790, Frequency 710.0 MHz

Reference Frequency: LTE Band 17 Mid Channel 710.0 MHz @ 20°C				
Limit: +/- 2.5 ppm = 1775.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.80	50	710.00000679	-0.017	2.5
3.80	40	710.00000597	-0.016	2.5
3.80	30	710.00000534	-0.015	2.5
3.80	20	709.99999451	0	2.5
3.80	10	709.99999362	0.001	2.5
3.80	0	710.00000548	-0.015	2.5
3.80	-10	710.00000617	-0.016	2.5
3.80	-20	709.99999300	0.002	2.5
3.80	-30	709.99999322	0.002	2.5

Reference Frequency: LTE Band 17 Mid Channel 710.0 MHz @ 20°C				
Limit: +/- 2.5 ppm = 1775.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.80	20	709.99999451	0	2.5
4.20	20	709.99999349	0.001	2.5
3.40	20	710.00000710	-0.018	2.5

LTE Band 5, Channel 20524, Frequency 836.5 MHz

WCDMA Band 5, Channel 4183, Frequency 836.6 MHz

GSM 850, Channel 190, Frequency 836.6 MHz

Reference Frequency: LTE Band 5 Mid Channel 836.5 MHz @ 20°C				
Limit: +/- 2.5 ppm = 2091.250 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.80	50	836.5000581	0.002	2.5
3.80	40	836.5000797	-0.001	2.5
3.80	30	836.5000674	0.001	2.5
3.80	20	836.5000740	0	2.5
3.80	10	836.5000709	0.000	2.5
3.80	0	836.5000571	0.002	2.5
3.80	-10	836.5000536	0.002	2.5
3.80	-20	836.5000847	-0.001	2.5
3.80	-30	836.5000824	-0.001	2.5

Reference Frequency: LTE Band 5 Mid Channel 836.5 MHz @ 20°C				
Limit: +/- 2.5 ppm = 2091.250 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.80	20	836.5000740	0	2.5
4.20	20	836.5000847	-0.001	2.5
3.40	20	836.5000814	-0.001	2.5

LTE Band 4, Channel 20174, Frequency 1732.5 MHz

WCDMA Band 4, Channel 1413, Frequency 1732.6 MHz

Reference Frequency: LTE Band 4 Mid Channel 1732.5 MHz @ 20°C				
Limit: +/- 2.5 ppm = 4331.250 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.80	50	1732.49999146	0.009	2.5
3.80	40	1732.49999260	0.009	2.5
3.80	30	1732.49998854	0.011	2.5
3.80	20	1732.50000784	0	2.5
3.80	10	1732.50000834	0.000	2.5
3.80	0	1732.49999169	0.009	2.5
3.80	-10	1732.50000875	-0.001	2.5
3.80	-20	1732.50000830	0.000	2.5
3.80	-30	1732.50001267	-0.003	2.5

Reference Frequency: LTE Band 4 Mid Channel 1732.5 MHz @ 20°C				
Limit: +/- 2.5 ppm = 4331.250 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.80	20	1732.50000784	0	2.5
4.20	20	1732.49998943	0.011	2.5
3.40	20	1732.49998946	0.011	2.5

LTE Band 2, Channel 18900, Frequency 1880.0 MHz

WCDMA Band 2, Channel 9400, Frequency 1880.0 MHz

GSM 1900, Channel 661, Frequency 1880.0 MHz

Reference Frequency: LTE Band 2 Mid Channel 1880.0 MHz @ 20°C				
Limit: +/- 2.5 ppm = 4700.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.80	50	1880.00001712	-0.003	2.5
3.80	40	1880.00001187	0.000	2.5
3.80	30	1880.00001638	-0.003	2.5
3.80	20	1880.00001164	0	2.5
3.80	10	1880.00001735	-0.003	2.5
3.80	0	1880.00001668	-0.003	2.5
3.80	-10	1880.00001639	-0.003	2.5
3.80	-20	1880.00001420	-0.001	2.5
3.80	-30	1880.00001641	-0.003	2.5

Reference Frequency: LTE Band 2 Mid Channel 1880.0 MHz @ 20°C				
Limit: +/- 2.5 ppm = 4700.000 Hz				
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse		
		[MHz]	Delta [ppm]	Limit [ppm]
3.80	20	1880.00001164	0	2.5
4.20	20	1880.00001315	-0.001	2.5
3.40	20	1880.00001276	-0.001	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232 and §27.50

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50(c) - (10) Portable stations (hand-held devices) are limited to 3 watts ERP; (LTE B17)

27.50(d) - (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.(Band 4)

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603D Clause 2.2.17; MXA setting reference to 971168 D01 v02r02

For peak power measurement with a MXA:

a) Set the RBW \geq OBW; b) Set VBW $\geq 3 \times$ RBW; c) Set span $\geq 2 \times$ RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points \geq span/RBW; g) Trace mode = max hold;

For average power measurement with a MXA:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW $\geq 3 \times$ RBW; d) Set number of points in sweep $\geq 2 \times$ span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98 ; h) Use trigger to capture bursts If burst duty cycle < 98 ; i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

TEST RESULTS

11.1.1. ERP/EIRP Results

GSM

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
GSM850	GPRS	128	824.2	32.04	1599.56
		190	836.6	31.94	1563.15
		251	848.8	31.79	1510.08
	EGPRS	128	824.2	26.70	467.74
		190	836.6	25.80	380.19
		251	848.8	26.34	430.53
GSM1900	GPRS	512	1850.2	29.88	972.75
		661	1880.0	29.93	984.01
		810	1909.8	30.32	1076.47
	EGPRS	512	1850.2	27.28	534.56
		661	1880.0	27.35	543.25
		810	1909.8	27.17	521.19

WCDMA

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
Band 5	REL99	4132	826.4	19.71	93.54
		4183	836.6	19.52	89.54
		4233	846.6	20.04	100.93
	HSDPA	4132	826.4	19.38	86.70
		4183	836.6	19.30	85.11
		4233	846.6	19.99	99.77
Band 4	REL99	1312	1712.4	23.78	238.78
		1413	1732.6	23.93	247.17
		1513	1752.6	23.97	249.46
	HSDPA	1312	1712.4	21.35	136.46
		1413	1732.6	22.57	180.72
		1513	1752.6	22.38	172.98
Band 2	REL99	9262	1852.4	26.64	461.32
		9400	1880.0	24.70	295.12
		9538	1907.6	24.46	279.25
	HSDPA	9262	1852.4	24.29	268.53
		9400	1880.0	23.76	237.68
		9538	1907.6	22.87	193.64

LTE Band 17

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 17	10	QPSK	50/0	709.0	14.12	25.82
			50/0	710.0	13.84	24.21
			50/0	711.0	12.52	17.86
		16QAM	50/0	709.0	13.42	21.98
			50/0	710.0	13.03	20.09
			50/0	711.0	11.70	14.79
	5	QPSK	25/0	706.5	12.10	16.22
			25/0	710.0	13.50	22.39
			25/0	713.5	12.42	17.46
		16QAM	25/0	706.5	11.25	13.34
			25/0	710.0	12.32	17.06
			25/0	713.5	11.54	14.26

LTE Band 5

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 5	10	QPSK	50/0	829.0	20.15	103.51
			50/0	836.5	18.49	70.63
			50/0	844.0	18.22	66.37
		16QAM	50/0	829.0	19.52	89.54
			50/0	836.5	17.93	62.09
			50/0	844.0	17.59	57.41
	5	QPSK	25/0	826.5	19.81	95.72
			25/0	836.5	18.38	68.87
			25/0	846.5	17.30	53.70
		16QAM	25/0	826.5	19.03	79.98
			25/0	836.5	17.53	56.62
			25/0	846.5	17.05	50.70
	3	QPSK	15/0	825.5	19.34	85.90
			15/0	836.5	18.15	65.31
			15/0	847.5	18.03	63.53
		16QAM	15/0	825.5	18.51	70.96
			15/0	836.5	17.48	55.98
			15/0	847.5	17.78	59.98
	1.4	QPSK	6/0	824.7	17.81	60.39
			6/0	836.5	16.57	45.39
			6/0	848.3	15.76	37.67
		16QAM	6/0	824.7	17.00	50.12
			6/0	836.5	15.91	38.99
			6/0	848.3	15.56	35.97

LTE Band 4

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 4	20	QPSK	100/0	1720.0	22.90	194.98
			100/0	1732.5	22.57	180.72
			100/0	1745.0	21.08	128.23
		16QAM	100/0	1720.0	22.80	190.55
			100/0	1732.5	22.47	176.60
			100/0	1745.0	20.98	125.31
	15	QPSK	75/0	1717.5	22.84	192.31
			75/0	1732.5	22.57	180.72
			75/0	1747.5	21.12	129.42
		16QAM	75/0	1717.5	22.64	183.65
			75/0	1732.5	22.47	176.60
			75/0	1747.5	21.22	132.43
	10	QPSK	50/0	1715.0	22.76	188.80
			50/0	1732.5	22.67	184.93
			50/0	1750.0	21.44	139.32
		16QAM	50/0	1715.0	22.66	184.50
			50/0	1732.5	22.37	172.58
			50/0	1750.0	21.24	133.05
	5	QPSK	25/0	1712.5	22.51	178.24
			25/0	1732.5	22.39	173.38
			25/0	1752.5	21.22	132.43
		16QAM	25/0	1712.5	22.60	181.97
			25/0	1732.5	22.46	176.20
			25/0	1752.5	21.27	133.97
	3	QPSK	15/0	1711.5	22.61	182.39
			15/0	1732.5	22.49	177.42
			15/0	1753.5	21.29	134.59
		16QAM	15/0	1711.5	22.64	183.65
			15/0	1732.5	22.63	183.23
			15/0	1753.5	21.47	140.28
1.4	QPSK	6/0	1710.7	20.43	110.41	
		6/0	1732.5	20.41	109.90	
		6/0	1754.3	18.75	74.99	
	16QAM	6/0	1710.7	19.66	92.47	
		6/0	1732.5	19.83	96.16	
		6/0	1754.3	18.06	63.97	

LTE Band 2

Band	BW [MHz]	Mode	RB/RB Size	f [MHz]	ERP / EIRP	
			Full RB		[dBm]	[mW]
Band 2	20	QPSK	100/0	1860.0	23.87	243.78
			100/0	1880.0	23.34	215.77
			100/0	1900.0	24.00	251.19
		16QAM	100/0	1860.0	23.64	231.21
			100/0	1880.0	23.15	206.54
			100/0	1900.0	23.71	234.96
	15	QPSK	75/0	1857.5	23.99	250.61
			75/0	1880.0	22.95	197.24
			75/0	1902.5	24.00	251.19
		16QAM	75/0	1857.5	23.73	236.05
			75/0	1880.0	22.73	187.50
			75/0	1902.5	23.71	234.96
	10	QPSK	50/0	1955.0	24.39	274.79
			50/0	1880.0	24.01	251.77
			50/0	1905.0	24.49	281.19
		16QAM	50/0	1955.0	24.16	260.62
			50/0	1880.0	23.84	242.10
			50/0	1905.0	24.15	260.02
	5	QPSK	25/0	1852.5	24.05	254.10
			25/0	1880.0	23.09	203.70
			25/0	1907.5	23.54	225.94
		16QAM	25/0	1852.5	23.83	241.55
			25/0	1880.0	22.89	194.54
			25/0	1907.5	23.22	209.89
	3	QPSK	15/0	1815.5	24.02	252.35
			15/0	1880.0	23.16	207.01
			15/0	1908.5	23.29	213.30
		16QAM	15/0	1815.5	23.87	243.78
			15/0	1880.0	23.10	204.17
			15/0	1908.5	22.93	196.34
1.4	QPSK	6/0	1850.7	22.80	190.55	
		6/0	1880.0	22.17	164.82	
		6/0	1909.3	21.71	148.25	
	16QAM	6/0	1850.7	22.52	178.65	
		6/0	1880.0	21.60	144.54	
		6/0	1909.3	21.34	136.14	

11.1.2. ERP/EIRP DATA

GSM 850

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
		Company: Samsung Project #: 16K22699 Date: 01-27-16 Test Engineer: Steven Kim Configuration: EUT ONLY, Z Position Mode: GPRS 850 MHz Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
GSM GSM850 GPRS	Low Ch									
		824.20	34.66	V	1.1	-1.6	32.04	38.5	-6.4	
		824.20	18.87	H	1.1	-1.6	16.25	38.5	-22.2	
		Mid Ch								
		836.60	34.43	V	1.1	-1.4	31.94	38.5	-6.5	
		836.60	17.98	H	1.1	-1.4	15.49	38.5	-23.0	
		High Ch								
		848.80	34.15	V	1.1	-1.3	31.79	38.5	-6.7	
		848.80	19.70	H	1.1	-1.3	17.34	38.5	-21.1	
			Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm							
		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
		Company: Samsung Project #: 16K22699 Date: 01-27-16 Test Engineer: Steven Kim Configuration: EUT ONLY, Z Position Mode: EGPRS 850 MHz Test Equipment: Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
GSM GSM850 EGPRS	Low Ch									
		824.20	29.32	V	1.1	-1.6	26.70	38.5	-11.8	
		824.20	13.66	H	1.1	-1.6	11.04	38.5	-27.4	
		Mid Ch								
		836.60	28.29	V	1.1	-1.4	25.80	38.5	-12.7	
		836.60	11.57	H	1.1	-1.4	9.08	38.5	-29.4	
		High Ch								
		848.80	28.70	V	1.1	-1.3	26.34	38.5	-12.1	
		848.80	13.87	H	1.1	-1.3	11.51	38.5	-26.9	
			Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm							

GSM 1900

GSM GSM1900 GPRS		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2																																																																																																	
		f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
GSM GSM1900 EGPRS		Company: Samsung Project #: 16K22699 Date: 01-22-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: GPRS 1900MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse																																																																																																	
		Rev. 3.17.11																																																																																																	
		Company: Samsung Project #: 16K22699 Date: 01-22-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: EGPRS 1900MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse																																																																																																	
		Rev. 3.17.11																																																																																																	
		<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1850.20</td> <td>20.2</td> <td>V</td> <td>1.60</td> <td>8.80</td> <td>27.44</td> <td>33.0</td> <td>-5.6</td> <td></td> </tr> <tr> <td>1850.20</td> <td>22.7</td> <td>H</td> <td>1.60</td> <td>8.80</td> <td>29.88</td> <td>33.0</td> <td>-3.1</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>21.6</td> <td>V</td> <td>1.62</td> <td>8.62</td> <td>28.58</td> <td>33.0</td> <td>-4.4</td> <td></td> </tr> <tr> <td>1880.00</td> <td>22.9</td> <td>H</td> <td>1.62</td> <td>8.62</td> <td>29.93</td> <td>33.0</td> <td>-3.1</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1909.80</td> <td>21.9</td> <td>V</td> <td>1.63</td> <td>8.44</td> <td>28.75</td> <td>33.0</td> <td>-4.2</td> <td></td> </tr> <tr> <td>1909.80</td> <td>23.5</td> <td>H</td> <td>1.63</td> <td>8.44</td> <td>30.32</td> <td>33.0</td> <td>-2.7</td> <td></td> </tr> </tbody> </table>								f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.20	20.2	V	1.60	8.80	27.44	33.0	-5.6		1850.20	22.7	H	1.60	8.80	29.88	33.0	-3.1		Mid Ch									1880.00	21.6	V	1.62	8.62	28.58	33.0	-4.4		1880.00	22.9	H	1.62	8.62	29.93	33.0	-3.1		High Ch									1909.80	21.9	V	1.63	8.44	28.75	33.0	-4.2		1909.80	23.5	H	1.63	8.44	30.32	33.0	-2.7	
		f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
		Low Ch																																																																																																	
		1850.20	20.2	V	1.60	8.80	27.44	33.0	-5.6																																																																																										
		1850.20	22.7	H	1.60	8.80	29.88	33.0	-3.1																																																																																										
		Mid Ch																																																																																																	
		1880.00	21.6	V	1.62	8.62	28.58	33.0	-4.4																																																																																										
		1880.00	22.9	H	1.62	8.62	29.93	33.0	-3.1																																																																																										
		High Ch																																																																																																	
		1909.80	21.9	V	1.63	8.44	28.75	33.0	-4.2																																																																																										
		1909.80	23.5	H	1.63	8.44	30.32	33.0	-2.7																																																																																										
Rev. 3.17.11																																																																																																			
<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1850.20</td> <td>17.7</td> <td>V</td> <td>1.60</td> <td>8.80</td> <td>24.93</td> <td>33.0</td> <td>-8.1</td> <td></td> </tr> <tr> <td>1850.20</td> <td>20.1</td> <td>H</td> <td>1.60</td> <td>8.80</td> <td>27.28</td> <td>33.0</td> <td>-5.7</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>20.1</td> <td>V</td> <td>1.62</td> <td>8.62</td> <td>27.11</td> <td>33.0</td> <td>-5.9</td> <td></td> </tr> <tr> <td>1880.00</td> <td>20.4</td> <td>H</td> <td>1.62</td> <td>8.62</td> <td>27.35</td> <td>33.0</td> <td>-5.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1909.80</td> <td>18.9</td> <td>V</td> <td>1.63</td> <td>8.44</td> <td>25.69</td> <td>33.0</td> <td>-7.3</td> <td></td> </tr> <tr> <td>1909.80</td> <td>20.4</td> <td>H</td> <td>1.63</td> <td>8.44</td> <td>27.17</td> <td>33.0</td> <td>-5.8</td> <td></td> </tr> </tbody> </table>								f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.20	17.7	V	1.60	8.80	24.93	33.0	-8.1		1850.20	20.1	H	1.60	8.80	27.28	33.0	-5.7		Mid Ch									1880.00	20.1	V	1.62	8.62	27.11	33.0	-5.9		1880.00	20.4	H	1.62	8.62	27.35	33.0	-5.6		High Ch									1909.80	18.9	V	1.63	8.44	25.69	33.0	-7.3		1909.80	20.4	H	1.63	8.44	27.17	33.0	-5.8			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																											
Low Ch																																																																																																			
1850.20	17.7	V	1.60	8.80	24.93	33.0	-8.1																																																																																												
1850.20	20.1	H	1.60	8.80	27.28	33.0	-5.7																																																																																												
Mid Ch																																																																																																			
1880.00	20.1	V	1.62	8.62	27.11	33.0	-5.9																																																																																												
1880.00	20.4	H	1.62	8.62	27.35	33.0	-5.6																																																																																												
High Ch																																																																																																			
1909.80	18.9	V	1.63	8.44	25.69	33.0	-7.3																																																																																												
1909.80	20.4	H	1.63	8.44	27.17	33.0	-5.8																																																																																												
Rev. 3.17.11																																																																																																			

WCDMA Band 5

f MHz		SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
826.40	22.32	V	1.1	-1.5	19.71	38.5	-18.7		
826.40	5.66	H	1.1	-1.5	3.05	38.5	-35.4		
Mid Ch									
836.60	22.01	V	1.1	-1.4	19.52	38.5	-18.9		
836.60	6.12	H	1.1	-1.4	3.63	38.5	-34.8		
High Ch									
846.60	22.42	V	1.1	-1.3	20.04	38.5	-18.4		
846.60	6.23	H	1.1	-1.3	3.85	38.5	-34.6		
Rev. 3.17.11									

f MHz		SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
826.40	21.99	V	1.1	-1.5	19.38	38.5	-19.1		
826.40	5.38	H	1.1	-1.5	2.77	38.5	-35.7		
Mid Ch									
836.60	21.79	V	1.1	-1.4	19.30	38.5	-19.2		
836.60	5.86	H	1.1	-1.4	3.37	38.5	-35.1		
High Ch									
846.60	22.37	V	1.1	-1.3	19.99	38.5	-18.5		
846.60	5.95	H	1.1	-1.3	3.57	38.5	-34.9		
Rev. 3.17.11									

WCDMA Band 4

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
WCDMA Band 4 REL99	Company: Samsung Project #: 16K22699 Date: 01-23-16 Test Engineer: Steven.Kim Configuration: EUT ONLY, X Position Mode: Rel 99_1700 MHz									
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	1712.40	4.87	V	1.54	9.20	12.53	30.0	-17.5		
	1712.40	16.12	H	1.54	9.20	23.78	30.0	-6.2		
	Mid Ch									
	1732.60	5.71	V	1.55	9.31	13.47	30.0	-16.5		
	1732.60	16.17	H	1.55	9.31	23.93	30.0	-6.1		
	High Ch									
	1752.60	5.09	V	1.56	9.38	12.91	30.0	-17.1		
	1752.60	16.15	H	1.56	9.38	23.97	30.0	-6.0		
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									
	WCDMA Band 4 HSDPA	Company: Samsung Project #: 16K22699 Date: 01-23-16 Test Engineer: Steven.Kim Configuration: EUT ONLY, X Position Mode: HSDPA_1700 MHz								
		Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
f MHz		SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
Low Ch										
1712.40		3.37	V	1.54	9.20	11.03	30.0	-19.0		
1712.40		13.69	H	1.54	9.20	21.35	30.0	-8.7		
Mid Ch										
1732.60		4.29	V	1.55	9.31	12.05	30.0	-18.0		
1732.60		14.81	H	1.55	9.31	22.57	30.0	-7.4		
High Ch										
1752.60		3.61	V	1.56	9.38	11.43	30.0	-18.6		
1752.60		14.56	H	1.56	9.38	22.38	30.0	-7.6		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm										

WCDMA Band 2

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
		Company: Samsung		Project #: 16K22699		Date: 01-22-16		Test Engineer: Steven.Kim	
WCDMA Band 2 REL99		Configuration: EUT ONLY, X Position		Mode: REL99_1900 MHz					
		Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
Low Ch									
1852.40	10.33	V	1.60	8.79	17.52	33.0	-15.5		
1852.40	19.45	H	1.60	8.79	26.64	33.0	-6.4		
Mid Ch									
1880.00	8.36	V	1.62	8.62	15.36	33.0	-17.6		
1880.00	17.70	H	1.62	8.62	24.70	33.0	-8.3		
High Ch									
1907.60	7.68	V	1.63	8.45	14.50	33.0	-18.5		
1907.60	17.64	H	1.63	8.45	24.46	33.0	-8.5		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									
		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
		Company: Samsung		Project #: 16K22699		Date: 01-22-16		Test Engineer: Steven.Kim	

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
		Configuration: EUT ONLY, X Position		Mode: HSDPA_1900 MHz					
Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
Low Ch									
1852.40	8.52	V	1.60	8.79	15.71	33.0	-17.3		
1852.40	17.10	H	1.60	8.79	24.29	33.0	-8.7		
Mid Ch									
1880.00	6.72	V	1.62	8.62	13.72	33.0	-19.3		
1880.00	16.76	H	1.62	8.62	23.76	33.0	-9.2		
High Ch									
1907.60	6.26	V	1.63	8.45	13.08	33.0	-19.9		
1907.60	16.05	H	1.63	8.45	22.87	33.0	-10.1		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

LTE Band 17

LTE Band 17 10MHz QPSK	Company: Samsung Project #: 16K22699 Date: 01-27-16 Test Engineer: Steven Kim Configuration: EUT / Z-Position Mode: LTE Band 17, QPSK, 10MHz Test Equipment: Receiving: VULB9163-750, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	709.00	16.72	V	1.0	-1.6	14.12	34.8	-20.7		
	709.00	2.00	H	1.0	-1.6	-0.60	34.8	-35.4		
	Mid Ch									
	710.00	16.44	V	1.0	-1.6	13.84	34.8	-20.9		
	710.00	1.99	H	1.0	-1.6	-0.61	34.8	-35.4		
	High Ch									
	711.00	15.12	V	1.0	-1.6	12.52	34.8	-22.3		
	711.00	2.70	H	1.0	-1.6	0.10	34.8	-34.7		
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									
	LTE Band 17 10MHz 16QAM	High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
		Company: Samsung Project #: 16K22699 Date: 01-27-16 Test Engineer: Steven Kim Configuration: EUT / Z-Position Mode: LTE Band 17 16QAM, 10MHz Test Equipment: Receiving: VULB9163-750, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.								
f MHz		SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
Low Ch										
709.00		16.02	V	1.0	-1.6	13.42	34.8	-21.4		
709.00		1.11	H	1.0	-1.6	-1.49	34.8	-36.3		
Mid Ch										
710.00		15.63	V	1.0	-1.6	13.03	34.8	-21.7		
710.00		1.20	H	1.0	-1.6	-1.40	34.8	-36.2		
High Ch										
711.00		14.30	V	1.0	-1.6	11.70	34.8	-23.1		
711.00		1.87	H	1.0	-1.6	-0.73	34.8	-35.5		
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm										

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
LTE Band 17 5MHz QPSK	Company:		Samsung						
	Project #:		16K22699						
	Date:		01-27-16						
	Test Engineer:		Steven Kim						
	Configuration:		EUT / Z-Position						
	Mode:		LTE Band 17, QPSK , 5MHz						
	Test Equipment:		Receiving: VULB9163-750, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.						
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	706.50	14.70	V	1.0	-1.6	12.10	34.8	-22.7	
	706.50	0.49	H	1.0	-1.6	-2.11	34.8	-36.9	
	Mid Ch								
	710.00	16.10	V	1.0	-1.6	13.50	34.8	-21.3	
710.00	1.06	H	1.0	-1.6	-1.54	34.8	-36.3		
High Ch									
713.50	15.02	V	1.0	-1.6	12.42	34.8	-22.4		
713.50	1.98	H	1.0	-1.6	-0.62	34.8	-35.4		
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									
		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
LTE Band 17 5MHz 16QAM	Company:		Samsung						
	Project #:		16K22699						
	Date:		01-27-16						
	Test Engineer:		Steven Kim						
	Configuration:		EUT / Z-Position						
	Mode:		LTE Band 17 16QAM, 5MHz						
	Test Equipment:		Receiving: VULB9163-750, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.						
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	706.50	13.85	V	1.0	-1.6	11.25	34.8	-23.5	
	706.50	-0.36	H	1.0	-1.6	-2.96	34.8	-37.7	
	Mid Ch								
	710.00	14.92	V	1.0	-1.6	12.32	34.8	-22.5	
710.00	0.19	H	1.0	-1.6	-2.41	34.8	-37.2		
High Ch									
713.50	14.14	V	1.0	-1.6	11.54	34.8	-23.2		
713.50	1.06	H	1.0	-1.6	-1.54	34.8	-36.3		
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

LTE Band 5

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
LTE Band 5 10MHz QPSK	Company:		Samsung							
	Project #:		16K22699							
	Date:		02-11-16							
	Test Engineer:		Steven Kim							
	Configuration:		EUT ONLY, Z Position							
	Mode:		TX, LTE BAND 5, 10MHz BW,QPSK							
	Test Equipment:		Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	829.00	22.73	V	1.1	-1.5	20.15	38.5	-18.3		
	829.00	3.68	H	1.1	-1.5	1.10	38.5	-37.4		
	Mid Ch									
	836.50	20.98	V	1.1	-1.4	18.49	38.5	-20.0		
	836.50	4.50	H	1.1	-1.4	2.01	38.5	-36.4		
	High Ch									
844.00	20.61	V	1.1	-1.3	18.22	38.5	-20.2			
844.00	5.65	H	1.1	-1.3	3.23	38.5	-35.2			
Rev. 3.17.11		Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								
		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
LTE Band 5 10MHz 16QAM	Company:		Samsung							
	Project #:		16K22699							
	Date:		02-11-16							
	Test Engineer:		Steven Kim							
	Configuration:		EUT ONLY, Z Position							
	Mode:		LTE5 10MHz FUND 16QAM							
	Test Equipment:		Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	829.00	22.10	V	1.1	-1.5	19.52	38.5	-18.9		
	829.00	3.14	H	1.1	-1.5	0.56	38.5	-37.9		
	Mid Ch									
	836.50	20.44	V	1.1	-1.4	17.93	38.5	-20.5		
	836.50	3.81	H	1.1	-1.4	1.30	38.5	-37.1		
	High Ch									
844.00	20.01	V	1.1	-1.3	17.59	38.5	-20.9			
844.00	4.98	H	1.1	-1.3	2.56	38.5	-35.9			
Rev. 3.17.11		Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
LTE Band 5 5MHz QPSK	Company:		Samsung						
	Project #:		16K22699						
	Date:		02-11-16						
	Test Engineer:		Steven Kim						
	Configuration:		EUT ONLY, Z Position						
	Mode:		LTE5 5MHz FUND QPSK						
	Test Equipment:		Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	826.50	22.41	V	1.1	-1.5	19.81	38.5	-18.6	
	826.50	4.68	H	1.1	-1.5	2.08	38.5	-36.4	
	Mid Ch								
	836.50	20.87	V	1.1	-1.4	18.38	38.5	-20.1	
	836.50	2.50	H	1.1	-1.4	0.01	38.5	-38.4	
	High Ch								
846.50	20.18	V	1.6	-1.3	17.30	38.5	-21.1		
846.50	6.88	H	1.6	-1.3	4.00	38.5	-34.4		
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									
LTE Band 5 5MHz 16QAM	Company:		Samsung						
	Project #:		16K22699						
	Date:		02-11-16						
	Test Engineer:		Steven Kim						
	Configuration:		EUT ONLY, Z Position						
	Mode:		LTE5 5MHz FUND 16QAM						
	Test Equipment:		Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	826.50	21.63	V	1.1	-1.5	19.03	38.5	-19.4	
	826.50	3.92	H	1.1	-1.5	1.32	38.5	-37.1	
	Mid Ch								
	836.50	20.02	V	1.1	-1.4	17.53	38.5	-20.9	
	836.50	1.70	H	1.1	-1.4	-0.80	38.5	-39.2	
	High Ch								
846.50	19.43	V	1.1	-1.3	17.05	38.5	-21.4		
846.50	6.16	H	1.1	-1.3	3.78	38.5	-34.7		
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
LTE Band 5 3MHz QPSK	Company:		Samsung							
	Project #:		16K22699							
	Date:		01-27-16							
	Test Engineer:		Steven.Kim							
	Configuration:		EUT ONLY, Z Position							
	Mode:		LTE5 3MHz FUND QPSK							
	Test Equipment:		Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	825.50	21.94	V	1.1	-1.5	19.34	38.5	-19.1		
	825.50	3.93	H	1.1	-1.5	1.33	38.5	-37.1		
	Mid Ch									
	836.50	20.64	V	1.1	-1.4	18.15	38.5	-20.3		
	836.50	3.40	H	1.1	-1.4	0.90	38.5	-37.5		
High Ch										
847.50	20.91	V	1.6	-1.3	18.03	38.5	-20.4			
847.50	4.97	H	1.6	-1.3	2.09	38.5	-36.4			
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm										
LTE Band 5 3MHz 16QAM	Company:		Samsung							
	Project #:		16K22699							
	Date:		01-27-16							
	Test Engineer:		Steven.Kim							
	Configuration:		EUT ONLY, Z Position							
	Mode:		LTE5 3MHz FUND 16QAM							
	Test Equipment:		Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	825.50	21.11	V	1.1	-1.5	18.51	38.5	-19.9		
	825.50	3.08	H	1.1	-1.5	0.48	38.5	-38.0		
	Mid Ch									
	836.50	19.97	V	1.1	-1.4	17.48	38.5	-21.0		
	836.50	2.58	H	1.1	-1.4	0.08	38.5	-38.4		
High Ch										
847.50	20.16	V	1.1	-1.3	17.78	38.5	-20.7			
847.50	4.14	H	1.1	-1.3	1.76	38.5	-36.7			
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm										

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
LTE Band 5 1.4MHz QPSK	Company:		Samsung							
	Project #:		16K22699							
	Date:		01-23-16							
	Test Engineer:		Steven Kim							
	Configuration:		EUT ONLY, Z Position							
	Mode:		LTE5 1.4MHz FUND QPSK							
	Test Equipment:		Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	824.70	20.41	V	1.1	-1.5	17.81	38.5	-20.6		
	824.70	4.73	H	1.1	-1.5	2.13	38.5	-36.3		
	Mid Ch									
	836.50	19.06	V	1.1	-1.4	16.57	38.5	-21.9		
	836.50	3.10	H	1.1	-1.4	0.61	38.5	-37.8		
High Ch										
848.30	18.64	V	1.6	-1.3	15.76	38.5	-22.7			
848.30	4.22	H	1.6	-1.3	1.34	38.5	-37.1			
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm										
LTE Band 5 1.4MHz 16QAM	Company:		Samsung							
	Project #:		16K22699							
	Date:		01-23-16							
	Test Engineer:		Steven Kim							
	Configuration:		EUT ONLY, Z Position							
	Mode:		LTE5 1.4MHz FUND 16QAM							
	Test Equipment:		Receiving: VULB9163-749, and 3m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole S/N: 00164753, 3m SMA Cable Warehouse.							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	824.70	19.60	V	1.1	-1.5	17.00	38.5	-21.5		
	824.70	4.08	H	1.1	-1.5	1.48	38.5	-37.0		
	Mid Ch									
	836.50	18.40	V	1.1	-1.4	15.91	38.5	-22.5		
	836.50	2.48	H	1.1	-1.4	-0.01	38.5	-38.5		
High Ch										
848.30	17.94	V	1.1	-1.3	15.56	38.5	-22.9			
848.30	3.41	H	1.1	-1.3	1.03	38.5	-37.4			
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm										

LTE Band 4

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
LTE Band 4 20MHz QPSK	Company: Samsung Project #: 16K22699 Date: 01-23-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: LTE Band 4, QPSK, 20MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse									
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
		Low Ch								
		1720.00	5.48	V	1.54	9.12	13.06	30.0	-16.9	
		1720.00	15.32	H	1.54	9.12	22.90	30.0	-7.1	
		Mid Ch								
		1732.50	5.59	V	1.55	9.31	13.35	30.0	-16.7	
		1732.50	14.81	H	1.55	9.31	22.57	30.0	-7.4	
		High Ch								
		1745.00	5.82	V	1.56	9.37	13.63	30.0	-16.4	
		1745.00	13.27	H	1.56	9.37	21.08	30.0	-8.9	
		Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
	LTE Band 4 20MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 01-23-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: LTE Band 4, 16QAM, 20MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
			f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
		Low Ch								
		1720.00	5.38	V	1.54	9.12	12.96	30.0	-17.0	
		1720.00	15.22	H	1.54	9.12	22.80	30.0	-7.2	
		Mid Ch								
		1732.50	5.39	V	1.55	9.31	13.15	30.0	-16.9	
		1732.50	14.71	H	1.55	9.31	22.47	30.0	-7.5	
		High Ch								
		1745.00	5.72	V	1.56	9.37	13.53	30.0	-16.5	
		1745.00	13.17	H	1.56	9.37	20.98	30.0	-9.0	
		Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
LTE Band 4 15MHz QPSK	Company: Samsung Project #: 16K22699 Date: 01-23-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: LTE Band 4, QPSK, 15MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1717.50	5.43	V	1.54	9.12	13.01	30.0	-17.0	
	1717.50	15.26	H	1.54	9.12	22.84	30.0	-7.2	
	Mid Ch								
	1732.50	5.59	V	1.55	9.31	13.35	30.0	-16.7	
	1732.50	14.81	H	1.55	9.31	22.57	30.0	-7.4	
	High Ch								
	1747.50	5.91	V	1.56	9.39	13.74	30.0	-16.3	
	1747.50	13.29	H	1.56	9.39	21.12	30.0	-8.9	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
	LTE Band 4 15MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 01-23-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: LTE Band 4, 16QAM, 15MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse							
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Ch									
1717.50		5.33	V	1.54	9.12	12.91	30.0	-17.1	
1717.50		15.06	H	1.54	9.12	22.64	30.0	-7.4	
Mid Ch									
1732.50		5.39	V	1.55	9.31	13.15	30.0	-16.9	
1732.50		14.71	H	1.55	9.31	22.47	30.0	-7.5	
High Ch									
1747.50		5.81	V	1.56	9.39	13.64	30.0	-16.4	
1747.50		13.39	H	1.56	9.39	21.22	30.0	-8.8	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
LTE Band 4 10MHz QPSK	Company:		Samsung						
	Project #:		16K22699						
	Date:		01-23-16						
	Test Engineer:		Steven Kim						
	Configuration:		EUT ONLY, X Position						
	Mode:		LTE Band 4, QPSK, 10MHz						
	Test Equipment:		Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1715.00	5.61	V	1.54	9.12	13.19	30.0	-16.8	
	1715.00	15.18	H	1.54	9.12	22.76	30.0	-7.2	
	Mid Ch								
	1732.50	5.69	V	1.55	9.31	13.45	30.0	-16.6	
	1732.50	14.91	H	1.55	9.31	22.67	30.0	-7.3	
	High Ch								
1750.00	6.07	V	1.56	9.40	13.91	30.0	-16.1		
1750.00	13.60	H	1.56	9.40	21.44	30.0	-8.6		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									
LTE Band 4 10MHz 16QAM	Company:		Samsung						
	Project #:		16K22699						
	Date:		01-23-16						
	Test Engineer:		Steven Kim						
	Configuration:		EUT ONLY, X Position						
	Mode:		LTE Band 4 16QAM, 10MHz						
	Test Equipment:		Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1715.00	5.51	V	1.54	9.12	13.09	30.0	-16.9	
	1715.00	15.08	H	1.54	9.12	22.66	30.0	-7.3	
	Mid Ch								
	1732.50	5.59	V	1.55	9.31	13.35	30.0	-16.7	
	1732.50	14.61	H	1.55	9.31	22.37	30.0	-7.6	
	High Ch								
1750.00	5.87	V	1.56	9.40	13.71	30.0	-16.3		
1750.00	13.40	H	1.56	9.40	21.24	30.0	-8.8		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
LTE Band 4 5MHz QPSK	Company:		Samsung							
	Project #:		16K22699							
	Date:		01-23-16							
	Test Engineer:		Steven Kim							
	Configuration:		EUT ONLY, X Position							
	Mode:		LTE Band 4, QPSK, 5MHz							
	Test Equipment:		Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	1712.50	5.37	V	1.54	9.12	12.95	30.0	-17.1		
	1712.50	14.93	H	1.54	9.12	22.51	30.0	-7.5		
	Mid Ch									
	1732.50	5.76	V	1.55	9.31	13.52	30.0	-16.5		
	1732.50	14.63	H	1.55	9.31	22.39	30.0	-7.6		
High Ch										
1752.50	5.98	V	1.56	9.39	13.81	30.0	-16.2			
1752.50	13.39	H	1.56	9.39	21.22	30.0	-8.8			
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm										
LTE Band 4 5MHz 16QAM	Company:		Samsung							
	Project #:		16K22699							
	Date:		01-23-16							
	Test Engineer:		Steven Kim							
	Configuration:		EUT ONLY, X Position							
	Mode:		LTE Band 4 16QAM, 5MHz							
	Test Equipment:		Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	1712.50	5.44	V	1.54	9.12	13.02	30.0	-17.0		
	1712.50	15.02	H	1.54	9.12	22.60	30.0	-7.4		
	Mid Ch									
	1732.50	5.85	V	1.55	9.31	13.61	30.0	-16.4		
	1732.50	14.70	H	1.55	9.31	22.46	30.0	-7.5		
High Ch										
1752.50	6.01	V	1.56	9.39	13.84	30.0	-16.2			
1752.50	13.44	H	1.56	9.39	21.27	30.0	-8.7			
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm										

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
LTE Band 4 3MHz QPSK	Company:		Samsung						
	Project #:		16K22699						
	Date:		01-23-16						
	Test Engineer:		Steven Kim						
	Configuration:		EUT ONLY, X Position						
	Mode:		LTE Band 4, QPSK, 3MHz						
	Test Equipment:		Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1711.50	5.40	V	1.54	9.12	12.98	30.0	-17.0	
	1711.50	15.03	H	1.54	9.12	22.61	30.0	-7.4	
	Mid Ch								
	1732.50	5.76	V	1.55	9.31	13.52	30.0	-16.5	
	1732.50	14.73	H	1.55	9.31	22.49	30.0	-7.5	
	High Ch								
1753.50	5.90	V	1.56	9.38	13.72	30.0	-16.3		
1753.50	13.47	H	1.56	9.38	21.29	30.0	-8.7		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									
LTE Band 4 3MHz 16QAM	Company:		Samsung						
	Project #:		16K22699						
	Date:		01-23-16						
	Test Engineer:		Steven Kim						
	Configuration:		EUT ONLY, X Position						
	Mode:		LTE Band 4 16QAM, 3MHz						
	Test Equipment:		Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1711.50	5.52	V	1.54	9.12	13.10	30.0	-16.9	
	1711.50	15.06	H	1.54	9.12	22.64	30.0	-7.4	
	Mid Ch								
	1732.50	5.87	V	1.55	9.31	13.63	30.0	-16.4	
	1732.50	14.87	H	1.55	9.31	22.63	30.0	-7.4	
	High Ch								
1753.50	6.11	V	1.56	9.38	13.93	30.0	-16.1		
1753.50	13.65	H	1.56	9.38	21.47	30.0	-8.5		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
LTE Band 4 1.4MHz QPSK	Company: Samsung Project #: 16K22699 Date: 01-23-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: LTE Band 4 QPSK, 1.4MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	1710.70	3.28	V	1.54	9.12	10.86	30.0	-19.1		
	1710.70	12.85	H	1.54	9.12	20.43	30.0	-9.6		
	Mid Ch									
	1732.50	3.61	V	1.55	9.31	11.37	30.0	-18.6		
	1732.50	12.65	H	1.55	9.31	20.41	30.0	-9.6		
	High Ch									
	1754.30	3.52	V	1.56	9.37	11.33	30.0	-18.7		
	1754.30	10.94	H	1.56	9.37	18.75	30.0	-11.3		
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									
	LTE Band 4 1.4MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 01-23-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: LTE Band 4 16QAM, 1.4MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
		Low Ch								
1710.70		2.72	V	1.54	9.12	10.30	30.0	-19.7		
1710.70		12.08	H	1.54	9.12	19.66	30.0	-10.3		
Mid Ch										
1732.50		2.86	V	1.55	9.31	10.62	30.0	-19.4		
1732.50		12.07	H	1.55	9.31	19.83	30.0	-10.2		
High Ch										
1754.30		3.29	V	1.56	9.37	11.10	30.0	-18.9		
1754.30		10.25	H	1.56	9.37	18.06	30.0	-11.9		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm										

LTE Band 2

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
LTE Band 2 20MHz QPSK	Company: Samsung Project #: 16K22699 Date: 01-24-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: LTE Band 2 QPSK, 20MHz									
	Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	1860.00	7.91	V	1.60	9.12	15.43	33.0	-17.6		
	1860.00	16.35	H	1.60	9.12	23.87	33.0	-9.1		
	Mid Ch									
	1880.00	8.43	V	1.62	8.62	15.43	33.0	-17.6		
	1880.00	16.34	H	1.62	8.62	23.34	33.0	-9.7		
	High Ch									
	1900.00	8.53	V	1.63	8.50	15.40	33.0	-17.6		
	1900.00	17.13	H	1.63	8.50	24.00	33.0	-9.0		
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									
	LTE Band 2 20MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 01-24-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: LTE Band 2 16QAM, 20MHz								
Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse										
f MHz		SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
Low Ch										
1860.00		7.64	V	1.60	9.12	15.16	33.0	-17.8		
1860.00		16.12	H	1.60	9.12	23.64	33.0	-9.4		
Mid Ch										
1880.00		8.19	V	1.62	8.62	15.19	33.0	-17.8		
1880.00		16.15	H	1.62	8.62	23.15	33.0	-9.8		
High Ch										
1900.00		8.26	V	1.63	8.50	15.13	33.0	-17.9		
1900.00		16.84	H	1.63	8.50	23.71	33.0	-9.3		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm										

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
LTE Band 2 15MHz QPSK	Company:		Samsung						
	Project #:		16K22699						
	Date:		01-24-16						
	Test Engineer:		Steven Kim						
	Configuration:		EUT ONLY, X Position						
	Mode:		LTE Band 2 QPSK, 15MHz						
	Test Equipment:		Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1857.50	16.47	V	1.60	9.12	23.99	33.0	-9.0	
	1857.50	8.32	H	1.60	9.12	15.84	33.0	-17.2	
	Mid Ch								
	1880.00	15.95	V	1.62	8.62	22.95	33.0	-10.0	
	1880.00	8.61	H	1.62	8.62	15.61	33.0	-17.4	
High Ch									
1902.50	17.14	V	1.63	8.49	24.00	33.0	-9.0		
1902.50	9.79	H	1.63	8.49	16.65	33.0	-16.3		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									
LTE Band 2 15MHz 16QAM	Company:		Samsung						
	Project #:		16K22699						
	Date:		01-24-16						
	Test Engineer:		Steven Kim						
	Configuration:		EUT ONLY, X Position						
	Mode:		LTE Band 2 16QAM, 15MHz						
	Test Equipment:		Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse						
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1857.50	16.21	V	1.60	9.12	23.73	33.0	-9.3	
	1857.50	8.01	H	1.60	9.12	15.53	33.0	-17.5	
	Mid Ch								
	1880.00	15.73	V	1.62	8.62	22.73	33.0	-10.3	
	1880.00	8.41	H	1.62	8.62	15.41	33.0	-17.6	
High Ch									
1902.50	16.85	V	1.63	8.49	23.71	33.0	-9.3		
1902.50	9.40	H	1.63	8.49	16.26	33.0	-16.7		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
LTE Band 2 10MHz QPSK	Company: Samsung Project #: 16K22699 Date: 01-24-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: LTE Band 2 QPSK, 10MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1855.00	8.27	V	1.60	9.12	15.79	33.0	-17.2	
	1855.00	16.87	H	1.60	9.12	24.39	33.0	-8.6	
	Mid Ch								
	1880.00	8.23	V	1.62	8.62	15.23	33.0	-17.8	
	1880.00	17.01	H	1.62	8.62	24.01	33.0	-9.0	
	High Ch								
	1905.00	9.31	V	1.63	8.47	16.15	33.0	-16.8	
	1905.00	17.65	H	1.63	8.47	24.49	33.0	-8.5	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
	LTE Band 2 10MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 01-24-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: LTE Band 2 16QAM, 10MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse							
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Ch									
1855.00		8.00	V	1.60	9.12	15.52	33.0	-17.5	
1855.00		16.64	H	1.60	9.12	24.16	33.0	-8.8	
Mid Ch									
1880.00		8.05	V	1.62	8.62	15.05	33.0	-17.9	
1880.00		16.84	H	1.62	8.62	23.84	33.0	-9.2	
High Ch									
1905.00		8.98	V	1.63	8.47	15.82	33.0	-17.2	
1905.00		17.31	H	1.63	8.47	24.15	33.0	-8.8	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
LTE Band 2 5MHz QPSK	Company:		Samsung							
	Project #:		16K22699							
	Date:		01-24-16							
	Test Engineer:		Steven Kim							
	Configuration:		EUT ONLY, X Position							
	Mode:		LTE Band 2 QPSK, 5MHz							
	Test Equipment:		Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	1852.50	7.38	V	1.60	9.12	14.90	33.0	-18.1		
	1852.50	16.53	H	1.60	9.12	24.05	33.0	-9.0		
	Mid Ch									
	1880.00	8.48	V	1.62	8.62	15.48	33.0	-17.5		
	1880.00	16.09	H	1.62	8.62	23.09	33.0	-9.9		
High Ch										
1907.50	8.98	V	1.63	8.46	15.81	33.0	-17.2			
1907.50	16.71	H	1.63	8.46	23.54	33.0	-9.5			
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm										
LTE Band 2 5MHz 16QAM	Company:		Samsung							
	Project #:		16K22699							
	Date:		01-24-16							
	Test Engineer:		Steven Kim							
	Configuration:		EUT ONLY, X Position							
	Mode:		LTE Band 2 16QAM, 5MHz							
	Test Equipment:		Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	1852.50	7.21	V	1.60	9.12	14.73	33.0	-18.3		
	1852.50	16.31	H	1.60	9.12	23.83	33.0	-9.2		
	Mid Ch									
	1880.00	8.23	V	1.62	8.62	15.23	33.0	-17.8		
	1880.00	15.89	H	1.62	8.62	22.89	33.0	-10.1		
High Ch										
1907.50	8.82	V	1.63	8.46	15.65	33.0	-17.3			
1907.50	16.39	H	1.63	8.46	23.22	33.0	-9.8			
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm										

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2								
LTE Band 2 3MHz QPSK	Company:		Samsung							
	Project #:		16K22699							
	Date:		01-24-16							
	Test Engineer:		Steven Kim							
	Configuration:		EUT ONLY, X Position							
	Mode:		LTE Band 2 QPSK, 3MHz							
	Test Equipment:		Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	1851.50	7.19	V	1.60	9.12	14.71	33.0	-18.3		
	1851.50	16.50	H	1.60	9.12	24.02	33.0	-9.0		
	Mid Ch									
	1880.00	7.73	V	1.62	8.62	14.73	33.0	-18.3		
	1880.00	16.16	H	1.62	8.62	23.16	33.0	-9.8		
High Ch										
1908.50	8.86	V	1.63	8.45	15.68	33.0	-17.3			
1908.50	16.47	H	1.63	8.45	23.29	33.0	-9.7			
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm										
LTE Band 2 3MHz 16QAM	Company:		Samsung							
	Project #:		16K22699							
	Date:		01-24-16							
	Test Engineer:		Steven Kim							
	Configuration:		EUT ONLY, X Position							
	Mode:		LTE Band 2 16QAM, 3MHz							
	Test Equipment:		Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse							
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	
	Low Ch									
	1851.50	7.07	V	1.60	9.12	14.59	33.0	-18.4		
	1851.50	16.35	H	1.60	9.12	23.87	33.0	-9.1		
	Mid Ch									
	1880.00	7.40	V	1.62	8.62	14.40	33.0	-18.6		
	1880.00	16.00	H	1.62	8.62	23.01	33.0	-10.0		
High Ch										
1908.50	9.00	V	1.63	8.45	15.82	33.0	-17.2			
1908.50	16.11	H	1.63	8.45	22.93	33.0	-10.1			
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm										

		High Frequency Substitution Measurement UL Korea, Ltd. Suwon Laboratory Chamber 2							
LTE Band 2 1.4MHz QPSK	Company: Samsung Project #: 16K22699 Date: 01-24-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: LTE Band 2 QPSK, 1.4MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1850.70	5.72	V	1.60	9.12	13.24	33.0	-19.8	
	1850.70	15.28	H	1.60	9.12	22.80	33.0	-10.2	
	Mid Ch								
	1880.00	5.95	V	1.62	8.62	12.95	33.0	-20.0	
	1880.00	15.17	H	1.62	8.62	22.17	33.0	-10.8	
	High Ch								
	1909.30	7.19	V	1.63	8.44	14.00	33.0	-19.0	
	1909.30	14.90	H	1.63	8.44	21.71	33.0	-11.3	
	Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								
	LTE Band 2 1.4MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 01-24-16 Test Engineer: Steven Kim Configuration: EUT ONLY, X Position Mode: LTE Band 2 16QAM, 1.4MHz Test Equipment: Receiving: 3117[00168724] and Chamber 1 SMA Cables Substitution: 3115[00161451] Substitution, 3m SMA Cable Warehouse							
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Ch									
1850.70		5.40	V	1.60	9.12	12.92	33.0	-20.1	
1850.70		15.00	H	1.60	9.12	22.52	33.0	-10.5	
Mid Ch									
1880.00		5.70	V	1.62	8.62	12.70	33.0	-20.3	
1880.00		14.60	H	1.62	8.62	21.60	33.0	-11.4	
High Ch									
1909.30		6.82	V	1.63	8.44	13.63	33.0	-19.4	
1909.30		14.53	H	1.63	8.44	21.34	33.0	-11.7	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238 and §27.53

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

11.2.1. SPURIOUS RADIATION PLOTS

GSM 850

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
GSM	GSM850 GPRS	Company: Samsung									
		Project #: 16K22699									
		Date: 01-27-16									
		Test Engineer: Steven Kim									
		Configuration: EUT / AC Adapter / Earphone, Z Position									
		Mode: GPRS 850 MHz									
		Chamber	Pre-amplifier	Filter	Limit						
		Chamber 2	AFS42	Filter 1	Part 22						
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes		
Low Ch, 824.2MHz											
1.6484	2.4	V	3.0	39.1	1.0	-35.7	-13.0	-22.7			
2.4726	5.5	V	3.0	39.5	1.0	-33.0	-13.0	-20.0			
3.2968	-9.5	V	3.0	40.1	1.0	-48.6	-13.0	-35.6			
1.6484	0.7	H	3.0	39.1	1.0	-37.4	-13.0	-24.4			
2.4726	0.5	H	3.0	39.5	1.0	-38.0	-13.0	-25.0			
3.2968	-16.5	H	3.0	40.1	1.0	-55.6	-13.0	-42.6			
Mid Ch, 836.6MHz											
1.6730	1.6	V	3.0	39.1	1.0	-36.6	-13.0	-23.6			
2.5098	-5.8	V	3.0	39.5	1.0	-44.3	-13.0	-31.3			
3.3464	-6.2	V	3.0	40.1	1.0	-45.4	-13.0	-32.4			
1.6730	3.1	H	3.0	39.1	1.0	-35.0	-13.0	-22.0			
2.5098	-6.0	H	3.0	39.5	1.0	-44.5	-13.0	-31.5			
3.3464	-14.3	H	3.0	40.1	1.0	-53.5	-13.0	-40.5			
High Ch, 848.8MHz											
1.6976	4.4	V	3.0	39.1	1.0	-33.7	-13.0	-20.7			
2.5466	0.3	V	3.0	39.6	1.0	-38.2	-13.0	-25.2			
3.3952	-6.3	V	3.0	40.2	1.0	-45.5	-13.0	-32.5			
1.6976	3.5	H	3.0	39.1	1.0	-34.6	-13.0	-21.6			
2.5466	-2.9	H	3.0	39.6	1.0	-41.5	-13.0	-28.5			
3.3952	-11.3	H	3.0	40.2	1.0	-50.5	-13.0	-37.5			
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											
GSM	GSM850 EGPRS	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
		Company: Samsung									
		Project #: 16K22699									
		Date: 01-27-16									
		Test Engineer: Steven Kim									
		Configuration: EUT / AC Adapter / Earphone, Z Position									
		Mode: EGPRS 850 MHz									
		Chamber	Pre-amplifier	Filter	Limit						
		Chamber 1	AFS42	Filter 1	Part 22						
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes		
Low Ch, 824.2MHz											
1.6484	-7.2	V	3.0	39.1	1.0	-45.3	-13.0	-32.3			
2.4726	-7.2	V	3.0	39.5	1.0	-45.7	-13.0	-32.7			
3.2968	-17.0	V	3.0	40.1	1.0	-56.1	-13.0	-43.1			
1.6484	-14.8	H	3.0	39.1	1.0	-52.9	-13.0	-39.9			
2.4726	-11.7	H	3.0	39.5	1.0	-50.2	-13.0	-37.2			
3.2968	-17.9	H	3.0	40.1	1.0	-57.0	-13.0	-44.0			
Mid Ch, 836.6MHz											
1.6730	-11.2	V	3.0	39.1	1.0	-49.3	-13.0	-36.3			
2.5098	-17.7	V	3.0	39.5	1.0	-56.3	-13.0	-43.3			
3.3464	-17.6	V	3.0	40.1	1.0	-56.7	-13.0	-43.7			
1.6730	-10.2	H	3.0	39.1	1.0	-48.3	-13.0	-35.3			
2.5098	-17.9	H	3.0	39.5	1.0	-56.4	-13.0	-43.4			
3.3464	-17.8	H	3.0	40.1	1.0	-56.9	-13.0	-43.9			
High Ch, 848.8MHz											
1.6976	-7.7	V	3.0	39.1	1.0	-45.9	-13.0	-32.9			
2.5466	-17.5	V	3.0	39.6	1.0	-56.1	-13.0	-43.1			
3.3952	-15.3	V	3.0	40.2	1.0	-54.5	-13.0	-41.5			
1.6976	-7.1	H	3.0	39.1	1.0	-45.2	-13.0	-32.2			
2.5466	-16.1	H	3.0	39.6	1.0	-54.7	-13.0	-41.7			
3.3952	-17.2	H	3.0	40.2	1.0	-56.4	-13.0	-43.4			
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											

GSM 1900

UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		16K22699							
Date:		01-22-16							
Test Engineer:		Steven Kim							
Configuration:		EUT / AC Adapter / Earphone, X Position							
Mode:		GPRS 1900							
Chamber		Pre-amplifier		Filter		Limit			
Chamber 2		AFS42		Filter 1		Part 24			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3.7004	0.3	V	3.0	40.5	1.0	-39.2	-13.0	-26.2	
5.5506	6.4	V	3.0	40.8	1.0	-33.5	-13.0	-20.5	
7.4008	4.5	V	3.0	40.8	1.0	-35.3	-13.0	-22.3	
3.7000	-1.5	H	3.0	40.5	1.0	-41.0	-13.0	-28.0	
5.5506	3.5	H	3.0	40.8	1.0	-36.3	-13.0	-23.3	
7.4008	0.2	H	3.0	40.8	1.0	-39.6	-13.0	-26.6	
Mid Ch, 1880.0MHz									
3.7600	1.7	V	3.0	40.5	1.0	-37.9	-13.0	-24.9	
5.6400	5.2	V	3.0	40.8	1.0	-34.6	-13.0	-21.6	
7.5200	1.2	V	3.0	40.7	1.0	-38.5	-13.0	-25.5	
3.7600	2.5	H	3.0	40.5	1.0	-37.1	-13.0	-24.1	
5.6400	4.0	H	3.0	40.8	1.0	-35.8	-13.0	-22.8	
7.5200	2.2	H	3.0	40.7	1.0	-37.5	-13.0	-24.5	
High Ch, 1909.8 MHz									
3.8196	1.9	V	3.0	40.6	1.0	-37.7	-13.0	-24.7	
5.7294	7.0	V	3.0	40.8	1.0	-32.8	-13.0	-19.8	
7.6392	-0.2	V	3.0	40.7	1.0	-39.8	-13.0	-26.8	
3.8196	0.5	H	3.0	40.6	1.0	-39.1	-13.0	-26.1	
5.7294	7.9	H	3.0	40.8	1.0	-31.9	-13.0	-18.9	
7.6392	-3.5	H	3.0	40.7	1.0	-43.2	-13.0	-30.2	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		16K22699							
Date:		01-22-16							
Test Engineer:		Steven Kim							
Configuration:		EUT / AC Adapter / Earphone, X Position							
Mode:		EGPRS 1900 MHz							
Chamber		Pre-amplifier		Filter		Limit			
Chamber 2		AFS42		Filter 1		Part 24			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3.7004	-8.3	V	3.0	40.5	1.0	-47.8	-13.0	-34.8	
5.5506	-11.2	V	3.0	40.8	1.0	-51.0	-13.0	-38.0	
7.4008	-7.6	V	3.0	40.8	1.0	-47.4	-13.0	-34.4	
3.7000	-8.2	H	3.0	40.5	1.0	-47.7	-13.0	-34.7	
5.5500	-12.6	H	3.0	40.8	1.0	-52.4	-13.0	-39.4	
7.4000	-9.6	H	3.0	40.8	1.0	-49.4	-13.0	-36.4	
Mid Ch, 1880.0MHz									
3.7600	-5.7	V	3.0	40.5	1.0	-45.2	-13.0	-32.2	
5.6400	-11.3	V	3.0	40.8	1.0	-51.1	-13.0	-38.1	
7.5200	-8.9	V	3.0	40.7	1.0	-48.6	-13.0	-35.6	
3.7600	-5.3	H	3.0	40.5	1.0	-44.9	-13.0	-31.9	
5.6400	-11.0	H	3.0	40.8	1.0	-50.8	-13.0	-37.8	
7.5200	-8.1	H	3.0	40.7	1.0	-47.8	-13.0	-34.8	
High Ch, 1909.8 MHz									
3.8196	-7.0	V	3.0	40.6	1.0	-46.6	-13.0	-33.6	
5.7294	-10.8	V	3.0	40.8	1.0	-50.5	-13.0	-37.5	
7.6392	-9.8	V	3.0	40.7	1.0	-49.5	-13.0	-36.5	
3.8196	-6.3	H	3.0	40.6	1.0	-45.9	-13.0	-32.9	
5.7294	-9.7	H	3.0	40.8	1.0	-49.5	-13.0	-36.5	
7.6392	-9.7	H	3.0	40.7	1.0	-49.3	-13.0	-36.3	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

WCDMA Band 5

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
WCDMA Band 5 REL99	Company: Samsung Project #: 16K22699 Date: 01-25-16 Test Engineer: Steven.Kim Configuration: EUT / AC Adapter / Earphone / Z Position Mode: Tx, REL99,850MHz										
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter Filter 1</div> <div style="border: 1px solid black; padding: 2px;">Limit Part 22</div> </div>										
		f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
		GHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
		Low Ch, 826.40MHz									
		1.6520	-10.7	V	3.0	39.1	1.0	-48.9	-13.0	-35.9	
		2.4790	-15.6	V	3.0	39.5	1.0	-54.1	-13.0	-41.1	
		3.3056	-14.1	V	3.0	40.1	1.0	-53.2	-13.0	-40.2	
		1.6520	-13.6	H	3.0	39.1	1.0	-51.7	-13.0	-38.7	
		2.4790	-17.0	H	3.0	39.5	1.0	-55.5	-13.0	-42.5	
		3.3056	-15.4	H	3.0	40.1	1.0	-54.5	-13.0	-41.5	
		Mid Ch, 836.6MHz									
		1.6732	-10.2	V	3.0	39.1	1.0	-48.3	-13.0	-35.3	
		2.5098	-14.2	V	3.0	39.5	1.0	-52.7	-13.0	-39.7	
		3.3464	-14.4	V	3.0	40.1	1.0	-53.6	-13.0	-40.6	
		1.6732	-13.1	H	3.0	39.1	1.0	-51.2	-13.0	-38.2	
		2.5098	-16.4	H	3.0	39.5	1.0	-55.0	-13.0	-42.0	
		3.3464	-14.4	H	3.0	40.1	1.0	-53.6	-13.0	-40.6	
		High Ch, 846.6MHz									
		1.6932	-4.4	V	3.0	39.1	1.0	-42.6	-13.0	-29.6	
		2.5390	-16.3	V	3.0	39.6	1.0	-54.9	-13.0	-41.9	
		3.3860	-14.8	V	3.0	40.2	1.0	-53.9	-13.0	-40.9	
		1.6932	-5.9	H	3.0	39.1	1.0	-44.0	-13.0	-31.0	
		2.5390	-17.0	H	3.0	39.6	1.0	-55.6	-13.0	-42.6	
		3.3860	-15.1	H	3.0	40.2	1.0	-54.3	-13.0	-41.3	
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										
WCDMA Band 5 HSDPA	Company: Samsung Project #: 16K22699 Date: 01-25-16 Test Engineer: Steven.Kim Configuration: EUT / AC Adapter / Earphone / Z Position Mode: Tx, HSDPA,850MHz										
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter Filter 1</div> <div style="border: 1px solid black; padding: 2px;">Limit Part 22</div> </div>										
		f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
		GHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
		Low Ch, 826.40MHz									
		1.6520	-13.7	V	3.0	39.1	1.0	-51.8	-13.0	-38.8	
		2.4790	-16.4	V	3.0	39.5	1.0	-54.9	-13.0	-41.9	
		3.3056	-15.5	V	3.0	40.1	1.0	-54.6	-13.0	-41.6	
		1.6520	-13.3	H	3.0	39.1	1.0	-51.4	-13.0	-38.4	
		2.4790	-17.5	H	3.0	39.5	1.0	-56.0	-13.0	-43.0	
		3.3056	-15.6	H	3.0	40.1	1.0	-54.7	-13.0	-41.7	
		Mid Ch, 836.6MHz									
		1.6732	-17.6	V	3.0	39.1	1.0	-55.7	-13.0	-42.7	
		2.5098	-17.2	V	3.0	39.5	1.0	-55.7	-13.0	-42.7	
		3.3464	-15.5	V	3.0	40.1	1.0	-54.6	-13.0	-41.6	
		1.6732	-17.6	H	3.0	39.1	1.0	-55.7	-13.0	-42.7	
		2.5098	-17.6	H	3.0	39.5	1.0	-56.1	-13.0	-43.1	
		3.3464	-15.7	H	3.0	40.1	1.0	-54.9	-13.0	-41.9	
		High Ch, 846.6MHz									
		1.6932	-15.7	V	3.0	39.1	1.0	-53.8	-13.0	-40.8	
		2.5390	-17.2	V	3.0	39.6	1.0	-55.8	-13.0	-42.8	
		3.3860	-15.3	V	3.0	40.2	1.0	-54.5	-13.0	-41.5	
		1.6932	-15.5	H	3.0	39.1	1.0	-53.6	-13.0	-40.6	
		2.5390	-17.6	H	3.0	39.6	1.0	-56.2	-13.0	-43.2	
		3.3860	-15.6	H	3.0	40.2	1.0	-54.8	-13.0	-41.8	
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

WCDMA Band 4

		Above 1GHz High Frequency Substitution Measurement									
WCDMA Band 4 REL99	Company: Samsung Project #: 16K22699 Date: 01-27-16 Test Engineer: Steven.Kim Configuration: EUT / AC Adapter / Earphone / X Position Mode: Tx, REL99,1700MHz										
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter Filter 1</div> <div style="border: 1px solid black; padding: 2px;">Limit Part 24</div> </div>										
		f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
		GHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
		Low Ch, 1712.4MHz									
		3.4248	-11.9	V	3.0	40.2	1.0	-51.1	-13.0	-38.1	
		5.1372	3.3	V	3.0	40.9	1.0	-36.6	-13.0	-23.6	
		6.8496	-4.3	V	3.0	41.0	1.0	-44.3	-13.0	-31.3	
		3.4248	-11.4	H	3.0	40.2	1.0	-50.6	-13.0	-37.6	
		5.1372	0.4	H	3.0	40.9	1.0	-39.5	-13.0	-26.5	
		6.8496	-7.3	H	3.0	41.0	1.0	-47.3	-13.0	-34.3	
		Mid Ch, 1732.6MHz									
		3.4652	-11.8	V	3.0	40.3	1.0	-51.1	-13.0	-38.1	
		5.1978	7.7	V	3.0	40.9	1.0	-32.2	-13.0	-19.2	
		6.9304	-4.6	V	3.0	41.0	1.0	-44.6	-13.0	-31.6	
		3.4652	-10.0	H	3.0	40.3	1.0	-49.2	-13.0	-36.2	
		5.1978	6.9	H	3.0	40.9	1.0	-33.0	-13.0	-20.0	
		6.9304	-4.8	H	3.0	41.0	1.0	-44.8	-13.0	-31.8	
		High Ch, 1752.6MHz									
		3.5052	-10.5	V	3.0	40.3	1.0	-49.8	-13.0	-36.8	
		5.2578	10.4	V	3.0	40.9	1.0	-29.5	-13.0	-16.5	
		7.0104	-5.6	V	3.0	41.0	1.0	-45.6	-13.0	-32.6	
		3.5052	-11.6	H	3.0	40.3	1.0	-50.9	-13.0	-37.9	
		5.2578	8.2	H	3.0	40.9	1.0	-31.6	-13.0	-18.6	
		7.0104	-6.2	H	3.0	41.0	1.0	-46.2	-13.0	-33.2	
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										
WCDMA Band 4 HSDPA	Company: Samsung Project #: 16K22699 Date: 01-27-16 Test Engineer: Steven.Kim Configuration: EUT / AC Adapter / Earphone / X Position Mode: Tx, HSDPA,1700MHz										
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter Filter 1</div> <div style="border: 1px solid black; padding: 2px;">Limit Part 24</div> </div>										
		f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
		GHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
		Low Ch, 1712.4MHz									
		3.4248	-12.1	V	3.0	40.2	1.0	-51.3	-13.0	-38.3	
		5.1372	3.1	V	3.0	40.9	1.0	-36.8	-13.0	-23.8	
		6.8496	-4.5	V	3.0	41.0	1.0	-44.5	-13.0	-31.5	
		3.4248	-11.5	H	3.0	40.2	1.0	-50.7	-13.0	-37.7	
		5.1372	-0.9	H	3.0	40.9	1.0	-40.8	-13.0	-27.8	
		6.8496	-6.4	H	3.0	41.0	1.0	-46.4	-13.0	-33.4	
		Mid Ch, 1732.6MHz									
		3.4652	-12.1	V	3.0	40.3	1.0	-51.3	-13.0	-38.3	
		5.1978	5.6	V	3.0	40.9	1.0	-34.2	-13.0	-21.2	
		6.9304	-5.7	V	3.0	41.0	1.0	-45.7	-13.0	-32.7	
		3.4652	-13.0	H	3.0	40.3	1.0	-52.2	-13.0	-39.2	
		5.1978	2.2	H	3.0	40.9	1.0	-37.6	-13.0	-24.6	
		6.9304	-6.6	H	3.0	41.0	1.0	-46.6	-13.0	-33.6	
		High Ch, 1752.6MHz									
		3.5052	-12.8	V	3.0	40.3	1.0	-52.1	-13.0	-39.1	
		5.2578	4.8	V	3.0	40.9	1.0	-35.1	-13.0	-22.1	
		7.0104	-6.2	V	3.0	41.0	1.0	-46.2	-13.0	-33.2	
		3.5052	-12.0	H	3.0	40.3	1.0	-51.3	-13.0	-38.3	
		5.2578	0.9	H	3.0	40.9	1.0	-39.0	-13.0	-26.0	
		7.0104	-6.8	H	3.0	41.0	1.0	-46.8	-13.0	-33.8	
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

WCDMA Band 2

		Above 1GHz High Frequency Substitution Measurement										
WCDMA Band 2 REL99	Company: Samsung Project #: 16K22699 Date: 01-22-16 Test Engineer: Steven.Kim Configuration: EUT / AC Adapter / Earphone / X Position Mode: Tx, REL99,1900MHz		Chamber Chamber 2		Pre-amplifier AFS42		Filter Filter 1		Limit Part 24			
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes		
	Low Ch, 1852.4MHz											
	3.7048	-6.2	V	3.0	40.5	1.0	-45.7	-13.0	-32.7			
	5.5572	13.6	V	3.0	40.8	1.0	-26.3	-13.0	-13.3			
	7.4096	-8.6	V	3.0	40.8	1.0	-48.4	-13.0	-35.4			
	3.7048	-3.6	H	3.0	40.5	1.0	-43.0	-13.0	-30.0			
	5.5572	10.6	H	3.0	40.8	1.0	-29.2	-13.0	-16.2			
	7.4096	-8.8	H	3.0	40.8	1.0	-48.6	-13.0	-35.6			
	Mid Ch, 1880MHz											
	3.7600	-7.3	V	3.0	40.5	1.0	-46.8	-13.0	-33.8			
	5.6400	15.1	V	3.0	40.8	1.0	-24.7	-13.0	-11.7			
	7.5200	-8.0	V	3.0	40.7	1.0	-47.7	-13.0	-34.7			
	3.7600	-7.7	H	3.0	40.5	1.0	-47.3	-13.0	-34.3			
	5.6400	12.0	H	3.0	40.8	1.0	-27.8	-13.0	-14.8			
	7.5200	-8.0	H	3.0	40.7	1.0	-47.8	-13.0	-34.8			
	High Ch, 1907.6MHz											
	3.8152	-8.6	V	3.0	40.6	1.0	-48.2	-13.0	-35.2			
	5.7228	20.0	V	3.0	40.8	1.0	-19.8	-13.0	-6.8			
	7.6304	-8.1	V	3.0	40.7	1.0	-47.7	-13.0	-34.7			
	3.8152	-8.0	H	3.0	40.6	1.0	-47.6	-13.0	-34.6			
	5.7228	15.5	H	3.0	40.8	1.0	-24.3	-13.0	-11.3			
	7.6304	-8.0	H	3.0	40.7	1.0	-47.7	-13.0	-34.7			
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											
	WCDMA Band 2 HSDPA	Company: Samsung Project #: 16K22699 Date: 01-22-16 Test Engineer: Steven.Kim Configuration: EUT / AC Adapter / Earphone / X Position Mode: Tx, HSDPA,1900MHz		Chamber Chamber 2		Pre-amplifier AFS42		Filter Filter 1		Limit Part 24		
f GHz		SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes		
Low Ch, 1852.4MHz												
3.7048		-6.6	V	3.0	40.5	1.0	-46.1	-13.0	-33.1			
5.5572		11.4	V	3.0	40.8	1.0	-28.4	-13.0	-15.4			
7.4096		-9.0	V	3.0	40.8	1.0	-48.8	-13.0	-35.8			
3.7048		-4.7	H	3.0	40.5	1.0	-44.2	-13.0	-31.2			
5.5572		9.3	H	3.0	40.8	1.0	-30.5	-13.0	-17.5			
7.4096		-8.8	H	3.0	40.8	1.0	-48.6	-13.0	-35.6			
Mid Ch, 1880MHz												
3.7600		-7.8	V	3.0	40.5	1.0	-47.4	-13.0	-34.4			
5.6400		15.3	V	3.0	40.8	1.0	-24.5	-13.0	-11.5			
7.5200		-7.9	V	3.0	40.7	1.0	-47.6	-13.0	-34.6			
3.7600		-7.5	H	3.0	40.5	1.0	-47.1	-13.0	-34.1			
5.6400		10.8	H	3.0	40.8	1.0	-29.0	-13.0	-16.0			
7.5200		-8.1	H	3.0	40.7	1.0	-47.8	-13.0	-34.8			
High Ch, 1907.6MHz												
3.8152		-8.0	V	3.0	40.6	1.0	-47.6	-13.0	-34.6			
5.7228		18.3	V	3.0	40.8	1.0	-21.4	-13.0	-8.4			
7.6304		-8.1	V	3.0	40.7	1.0	-47.8	-13.0	-34.8			
3.8152		-6.9	H	3.0	40.6	1.0	-46.5	-13.0	-33.5			
5.7228		14.1	H	3.0	40.8	1.0	-25.7	-13.0	-12.7			
7.6304		-8.0	H	3.0	40.7	1.0	-47.7	-13.0	-34.7			
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.												

LTE Band 17

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
LTE Band 17 10MHz QPSK	Company:	Samsung									
	Project #:	16K22699									
	Date:	02-03-16									
	Test Engineer:	Steven Kim									
	Configuration:	EUT / AC Adapter / Ear Phone / Z-Position									
	Mode:	TX, LTE BAND 17, 10MHzBW, QPSK									
			Chamber	Pre-amplifier	Filter	Limit					
			Chamber 2	AFS42	Filter 1	FCC Part 27					
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Channel (709MHz)										
	1.4180	12.6	V	3.0	39.0	1.0	-25.4	-13.0	-12.4		
	2.1270	-1.4	V	3.0	39.3	1.0	-39.7	-13.0	-26.7		
	2.8360	-12.8	V	3.0	39.7	1.0	-51.5	-13.0	-38.5		
	1.4180	1.2	H	3.0	39.0	1.0	-36.8	-13.0	-23.8		
	2.1270	-15.1	H	3.0	39.3	1.0	-53.4	-13.0	-40.4		
2.8360	-18.5	H	3.0	39.7	1.0	-57.2	-13.0	-44.2			
Mid Channel (710MHz)											
1.4200	11.7	V	3.0	39.0	1.0	-26.3	-13.0	-13.3			
2.1300	-8.3	V	3.0	39.3	1.0	-46.6	-13.0	-33.6			
2.8400	-12.0	V	3.0	39.7	1.0	-50.7	-13.0	-37.7			
1.4200	3.5	H	3.0	39.0	1.0	-34.5	-13.0	-21.5			
2.1300	-7.9	H	3.0	39.3	1.0	-46.2	-13.0	-33.2			
2.8400	-18.6	H	3.0	39.7	1.0	-57.3	-13.0	-44.3			
High Channel (711MHz)											
1.4220	11.9	V	3.0	39.0	1.0	-26.1	-13.0	-13.1			
2.1330	-2.5	V	3.0	39.3	1.0	-40.9	-13.0	-27.9			
2.8440	-14.6	V	3.0	39.7	1.0	-53.3	-13.0	-40.3			
1.4220	3.2	H	3.0	39.0	1.0	-34.8	-13.0	-21.8			
2.1330	-10.8	H	3.0	39.3	1.0	-49.1	-13.0	-36.1			
2.8440	-21.8	H	3.0	39.7	1.0	-60.5	-13.0	-47.5			
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											
LTE Band 17 10MHz 16QAM	Company:	Samsung									
	Project #:	16K22699									
	Date:	02-03-16									
	Test Engineer:	Steven Kim									
	Configuration:	EUT / AC Adapter / Ear Phone / Z-Position									
	Mode:	TX, LTE BAND 17, 10MHzBW, 16QAM									
			Chamber	Pre-amplifier	Filter	Limit					
			Chamber 2	AFS42	Filter 1	FCC Part 27					
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Channel (709MHz)										
	1.4180	10.4	V	3.0	39.0	1.0	-27.6	-13.0	-14.6		
	2.1270	-4.0	V	3.0	39.3	1.0	-42.4	-13.0	-29.4		
	2.8360	-14.3	V	3.0	39.7	1.0	-53.0	-13.0	-40.0		
	1.4180	-0.6	H	3.0	39.0	1.0	-38.7	-13.0	-25.7		
	2.1270	-16.3	H	3.0	39.3	1.0	-54.6	-13.0	-41.6		
2.8360	-19.2	H	3.0	39.7	1.0	-57.9	-13.0	-44.9			
Mid Channel (710MHz)											
1.4200	9.1	V	3.0	39.0	1.0	-28.9	-13.0	-15.9			
2.1300	-11.0	V	3.0	39.3	1.0	-49.4	-13.0	-36.4			
2.8400	-13.8	V	3.0	39.7	1.0	-52.5	-13.0	-39.5			
1.4200	0.9	H	3.0	39.0	1.0	-37.1	-13.0	-24.1			
2.1300	-10.0	H	3.0	39.3	1.0	-48.3	-13.0	-35.3			
2.8400	-19.7	H	3.0	39.7	1.0	-58.4	-13.0	-45.4			
High Channel (711MHz)											
1.4220	10.3	V	3.0	39.0	1.0	-27.7	-13.0	-14.7			
2.1330	-4.3	V	3.0	39.3	1.0	-42.7	-13.0	-29.7			
2.8440	-15.8	V	3.0	39.7	1.0	-54.5	-13.0	-41.5			
1.4220	3.0	H	3.0	39.0	1.0	-35.0	-13.0	-22.0			
2.1330	-12.4	H	3.0	39.3	1.0	-50.7	-13.0	-37.7			
2.8440	-21.9	H	3.0	39.7	1.0	-60.6	-13.0	-47.6			
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement										
LTE Band 17 5MHz QPSK		Company: Samsung										
		Project #: 16K22699										
		Date: 02-03-16										
		Test Engineer: Steven Kim										
		Configuration: EUT / AC Adapter / Ear Phone / Z-Position										
		Mode: TX, LTE BAND 17, 5MHz BW, QPSK										
		Chamber		Pre-amplifier		Filter		Limit				
		Chamber 2		AFS42		Filter 1		FCC Part 27				
		f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
		Low Channel (706.5MHz)										
		1.4130	8.1	V	3.0	39.0	1.0	-29.9	-13.0	-16.9		
		2.1195	-3.1	V	3.0	39.3	1.0	-41.5	-13.0	-28.5		
		2.8260	-11.0	V	3.0	39.7	1.0	-49.7	-13.0	-36.7		
		1.4130	2.9	H	3.0	39.0	1.0	-35.1	-13.0	-22.1		
		2.1195	-11.7	H	3.0	39.3	1.0	-50.1	-13.0	-37.1		
2.8260	-18.6	H	3.0	39.7	1.0	-57.3	-13.0	-44.3				
Mid Channel (710MHz)												
1.4200	10.4	V	3.0	39.0	1.0	-27.6	-13.0	-14.6				
2.1300	-8.7	V	3.0	39.3	1.0	-47.0	-13.0	-34.0				
2.8400	-13.2	V	3.0	39.7	1.0	-52.0	-13.0	-39.0				
1.4200	3.4	H	3.0	39.0	1.0	-34.6	-13.0	-21.6				
2.1300	-8.3	H	3.0	39.3	1.0	-46.7	-13.0	-33.7				
2.8400	-18.7	H	3.0	39.7	1.0	-57.5	-13.0	-44.5				
High Channel (713.5MHz)												
1.4270	11.2	V	3.0	39.0	1.0	-26.8	-13.0	-13.8				
2.1405	-8.0	V	3.0	39.3	1.0	-46.4	-13.0	-33.4				
2.8540	-14.1	V	3.0	39.7	1.0	-52.9	-13.0	-39.9				
1.4270	2.1	H	3.0	39.0	1.0	-35.9	-13.0	-22.9				
2.1405	-8.5	H	3.0	39.3	1.0	-46.9	-13.0	-33.9				
2.8540	-18.8	H	3.0	39.7	1.0	-57.6	-13.0	-44.6				
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.												
LTE Band 17 5MHz 16QAM		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement										
		Company: Samsung										
		Project #: 16K22699										
		Date: 02-03-16										
		Test Engineer: Steven Kim										
		Configuration: EUT / AC Adapter / Ear Phone / Z-Position										
		Mode: TX, LTE BAND 17, 5MHz BW, 16QAM										
		Chamber		Pre-amplifier		Filter		Limit				
		Chamber 2		AFS42		Filter 1		FCC Part 27				
		f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
		Low Channel (706.5MHz)										
		1.4130	4.1	V	3.0	39.0	1.0	-33.9	-13.0	-20.9		
		2.1195	-7.6	V	3.0	39.3	1.0	-45.9	-13.0	-32.9		
		2.8260	-12.6	V	3.0	39.7	1.0	-51.3	-13.0	-38.3		
		1.4130	-0.8	H	3.0	39.0	1.0	-38.9	-13.0	-25.9		
2.1195	-13.9	H	3.0	39.3	1.0	-52.2	-13.0	-39.2				
2.8260	-19.6	H	3.0	39.7	1.0	-58.4	-13.0	-45.4				
Mid Channel (710MHz)												
1.4200	7.6	V	3.0	39.0	1.0	-30.4	-13.0	-17.4				
2.1300	-11.3	V	3.0	39.3	1.0	-49.6	-13.0	-36.6				
2.8400	-16.4	V	3.0	39.7	1.0	-55.1	-13.0	-42.1				
1.4200	0.5	H	3.0	39.0	1.0	-37.5	-13.0	-24.5				
2.1300	-11.1	H	3.0	39.3	1.0	-49.5	-13.0	-36.5				
2.8400	-20.4	H	3.0	39.7	1.0	-59.1	-13.0	-46.1				
High Channel (713.5MHz)												
1.4270	8.9	V	3.0	39.0	1.0	-29.1	-13.0	-16.1				
2.1405	-9.2	V	3.0	39.3	1.0	-47.6	-13.0	-34.6				
2.8540	-16.1	V	3.0	39.7	1.0	-54.8	-13.0	-41.8				
1.4270	0.4	H	3.0	39.0	1.0	-37.6	-13.0	-24.6				
2.1405	-10.6	H	3.0	39.3	1.0	-48.9	-13.0	-35.9				
2.8540	-20.1	H	3.0	39.7	1.0	-58.8	-13.0	-45.8				
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.												

LTE Band 5

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
LTE Band 5 10MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-03-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / Z-Position Mode: TX, LTE BAND 5, 10MHz BW, QPSK		Chamber Chamber 2		Pre-amplifier AFS42		Filter Filter 1		Limit Part 22		
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Channel (829MHz)										
	1.6580	10.6	V	3.0	39.1	1.0	-27.5	-13.0	-14.5		
	2.4870	-5.8	V	3.0	39.5	1.0	-44.4	-13.0	-31.4		
	3.3160	-19.8	V	3.0	40.1	1.0	-58.9	-13.0	-45.9		
	1.6580	-1.1	H	3.0	39.1	1.0	-39.2	-13.0	-26.2		
	2.4870	-15.1	H	3.0	39.5	1.0	-53.6	-13.0	-40.6		
	3.3160	-19.9	H	3.0	40.1	1.0	-59.1	-13.0	-46.1		
	Mid Channel (836.5MHz)										
1.6730	8.4	V	3.0	39.1	1.0	-29.7	-13.0	-16.7			
2.5090	-9.7	V	3.0	39.5	1.0	-48.3	-13.0	-35.3			
3.3460	-17.4	V	3.0	40.1	1.0	-56.5	-13.0	-43.5			
1.6730	-0.6	H	3.0	39.1	1.0	-38.7	-13.0	-25.7			
2.5090	-18.0	H	3.0	39.5	1.0	-56.5	-13.0	-43.5			
3.3460	-19.9	H	3.0	40.1	1.0	-59.1	-13.0	-46.1			
High Channel (844MHz)											
1.6880	6.9	V	3.0	39.1	1.0	-31.2	-13.0	-18.2			
2.5320	-13.6	V	3.0	39.5	1.0	-52.2	-13.0	-39.2			
3.3760	-18.5	V	3.0	40.2	1.0	-57.6	-13.0	-44.6			
1.6880	-2.7	H	3.0	39.1	1.0	-40.8	-13.0	-27.8			
2.5320	-22.1	H	3.0	39.5	1.0	-60.7	-13.0	-47.7			
3.3760	-21.5	H	3.0	40.2	1.0	-60.7	-13.0	-47.7			
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											
LTE Band 5 10MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 02-03-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / Z-Position Mode: TX, LTE BAND 5, 10MHz BW, 16QAM		Chamber Chamber 2		Pre-amplifier AFS42		Filter Filter 1		Limit Part 22		
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Channel (829MHz)										
	1.6580	8.6	V	3.0	39.1	1.0	-29.5	-13.0	-16.5		
	2.4870	-7.7	V	3.0	39.5	1.0	-46.2	-13.0	-33.2		
	3.3160	-20.2	V	3.0	40.1	1.0	-59.3	-13.0	-46.3		
	1.6580	-3.0	H	3.0	39.1	1.0	-41.2	-13.0	-28.2		
	2.4870	-16.7	H	3.0	39.5	1.0	-55.2	-13.0	-42.2		
	3.3160	-20.7	H	3.0	40.1	1.0	-59.8	-13.0	-46.8		
	Mid Channel (836.5MHz)										
1.6730	7.1	V	3.0	39.1	1.0	-31.0	-13.0	-18.0			
2.5090	-11.0	V	3.0	39.5	1.0	-49.5	-13.0	-36.5			
3.3460	-17.9	V	3.0	40.1	1.0	-57.0	-13.0	-44.0			
1.6730	-1.9	H	3.0	39.1	1.0	-40.0	-13.0	-27.0			
2.5090	-18.8	H	3.0	39.5	1.0	-57.4	-13.0	-44.4			
3.3460	-20.6	H	3.0	40.1	1.0	-59.8	-13.0	-46.8			
High Channel (844MHz)											
1.6880	5.0	V	3.0	39.1	1.0	-33.2	-13.0	-20.2			
2.5320	-14.5	V	3.0	39.5	1.0	-53.1	-13.0	-40.1			
3.3760	-19.1	V	3.0	40.2	1.0	-58.3	-13.0	-45.3			
1.6880	-4.6	H	3.0	39.1	1.0	-42.8	-13.0	-29.8			
2.5320	-22.6	H	3.0	39.5	1.0	-61.2	-13.0	-48.2			
3.3760	-21.7	H	3.0	40.2	1.0	-60.9	-13.0	-47.9			
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement											
LTE Band 5 5MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-04-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / Z-Position Mode: TX, LTE BAND 5, 5MHz BW, QPSK		Chamber: Chamber 2		Pre-amplifier: AFS42		Filter: Filter 1		Limit: Part 22				
			f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
			Low Channel (826.5MHz)										
			1.6530	-14.0	V	3.0	39.1	1.0	-52.1	-13.0	-39.1		
			2.4790	-16.9	V	3.0	39.5	1.0	-55.5	-13.0	-42.5		
			3.3060	-19.1	V	3.0	40.1	1.0	-58.2	-13.0	-45.2		
			1.6530	-15.7	H	3.0	39.1	1.0	-53.8	-13.0	-40.8		
			2.4790	-16.1	H	3.0	39.5	1.0	-54.6	-13.0	-41.6		
			3.3060	-20.5	H	3.0	40.1	1.0	-59.6	-13.0	-46.6		
			Mid Channel (836.5MHz)										
			1.6730	-17.2	V	3.0	39.1	1.0	-55.3	-13.0	-42.3		
			2.5090	-16.5	V	3.0	39.5	1.0	-55.0	-13.0	-42.0		
			3.3460	-16.2	V	3.0	40.1	1.0	-55.3	-13.0	-42.3		
			1.6730	-17.6	H	3.0	39.1	1.0	-55.7	-13.0	-42.7		
			2.5090	-20.2	H	3.0	39.5	1.0	-58.7	-13.0	-45.7		
		3.3460	-20.5	H	3.0	40.1	1.0	-59.7	-13.0	-46.7			
		High Channel (846.5MHz)											
		1.6930	-10.8	V	3.0	39.1	1.0	-48.9	-13.0	-35.9			
		2.5390	-17.2	V	3.0	39.6	1.0	-55.8	-13.0	-42.8			
		3.3860	-17.4	V	3.0	40.2	1.0	-56.6	-13.0	-43.6			
		1.6930	-13.0	H	3.0	39.1	1.0	-51.2	-13.0	-38.2			
		2.5390	-20.2	H	3.0	39.6	1.0	-58.7	-13.0	-45.7			
		3.3860	-21.4	H	3.0	40.2	1.0	-60.6	-13.0	-47.6			
		Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											
LTE Band 5 5MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 02-04-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / Z-Position Mode: TX, LTE BAND 5, 5MHz BW, 16QAM		Chamber: Chamber 2		Pre-amplifier: AFS42		Filter: Filter 1		Limit: Part 22				
			f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
			Low Channel (826.5MHz)										
			1.6530	-16.7	V	3.0	39.1	1.0	-54.9	-13.0	-41.9		
			2.4790	-18.5	V	3.0	39.5	1.0	-57.1	-13.0	-44.1		
			3.3060	-19.7	V	3.0	40.1	1.0	-58.8	-13.0	-45.8		
			1.6530	-16.8	H	3.0	39.1	1.0	-54.9	-13.0	-41.9		
			2.4790	-17.6	H	3.0	39.5	1.0	-56.2	-13.0	-43.2		
			3.3060	-20.8	H	3.0	40.1	1.0	-59.9	-13.0	-46.9		
			Mid Channel (836.5MHz)										
			1.6730	-19.7	V	3.0	39.1	1.0	-57.8	-13.0	-44.8		
			2.5090	-18.4	V	3.0	39.5	1.0	-57.0	-13.0	-44.0		
			3.3460	-17.9	V	3.0	40.1	1.0	-57.0	-13.0	-44.0		
			1.6730	-17.1	H	3.0	39.1	1.0	-55.2	-13.0	-42.2		
			2.5090	-21.2	H	3.0	39.5	1.0	-59.7	-13.0	-46.7		
		3.3460	-21.3	H	3.0	40.1	1.0	-60.5	-13.0	-47.5			
		High Channel (846.5MHz)											
		1.6930	-13.9	V	3.0	39.1	1.0	-52.1	-13.0	-39.1			
		2.5390	-18.8	V	3.0	39.6	1.0	-57.3	-13.0	-44.3			
		3.3860	-18.9	V	3.0	40.2	1.0	-58.1	-13.0	-45.1			
		1.6930	-15.8	H	3.0	39.1	1.0	-53.9	-13.0	-40.9			
		2.5390	-21.7	H	3.0	39.6	1.0	-60.3	-13.0	-47.3			
		3.3860	-22.4	H	3.0	40.2	1.0	-61.6	-13.0	-48.6			
		Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																												
LTE Band 5 3MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-04-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / Z-Position Mode: TX, LTE BAND 5, 3MHz BW, QPSK																																																																																																																																																																																																																													
	<table border="1"> <tr> <th>Chamber</th> <th>Pre-amplifier</th> <th>Filter</th> <th>Limit</th> </tr> <tr> <td>Chamber 2</td> <td>AFS42</td> <td>Filter 1</td> <td>Part 22</td> </tr> </table>	Chamber	Pre-amplifier	Filter	Limit	Chamber 2	AFS42	Filter 1	Part 22																																																																																																																																																																																																																					
Chamber	Pre-amplifier	Filter	Limit																																																																																																																																																																																																																											
Chamber 2	AFS42	Filter 1	Part 22																																																																																																																																																																																																																											
	<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr><td colspan="10">Low Channel (825.5MHz)</td></tr> <tr><td>1.6510</td><td>-13.4</td><td>V</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-51.5</td><td>-13.0</td><td>-38.5</td><td></td></tr> <tr><td>2.4675</td><td>-19.8</td><td>V</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-58.3</td><td>-13.0</td><td>-45.3</td><td></td></tr> <tr><td>3.3020</td><td>-19.8</td><td>V</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-58.9</td><td>-13.0</td><td>-45.9</td><td></td></tr> <tr><td>1.6510</td><td>-14.0</td><td>H</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-52.1</td><td>-13.0</td><td>-39.1</td><td></td></tr> <tr><td>2.4675</td><td>-23.2</td><td>H</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-61.7</td><td>-13.0</td><td>-48.7</td><td></td></tr> <tr><td>3.3020</td><td>-20.2</td><td>H</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-59.3</td><td>-13.0</td><td>-46.3</td><td></td></tr> <tr><td colspan="10">Mid Channel (836.5MHz)</td></tr> <tr><td>1.6730</td><td>-18.5</td><td>V</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-56.6</td><td>-13.0</td><td>-43.6</td><td></td></tr> <tr><td>2.5090</td><td>-16.6</td><td>V</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-55.1</td><td>-13.0</td><td>-42.1</td><td></td></tr> <tr><td>3.3460</td><td>-19.4</td><td>V</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-58.6</td><td>-13.0</td><td>-45.6</td><td></td></tr> <tr><td>1.6730</td><td>-18.9</td><td>H</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-57.0</td><td>-13.0</td><td>-44.0</td><td></td></tr> <tr><td>2.5090</td><td>-20.2</td><td>H</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-58.8</td><td>-13.0</td><td>-45.8</td><td></td></tr> <tr><td>3.3460</td><td>-20.9</td><td>H</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-60.0</td><td>-13.0</td><td>-47.0</td><td></td></tr> <tr><td colspan="10">High Channel (847.5MHz)</td></tr> <tr><td>1.6950</td><td>-16.8</td><td>V</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-54.9</td><td>-13.0</td><td>-41.9</td><td></td></tr> <tr><td>2.5425</td><td>-18.0</td><td>V</td><td>3.0</td><td>39.6</td><td>1.0</td><td>-56.6</td><td>-13.0</td><td>-43.6</td><td></td></tr> <tr><td>3.3900</td><td>-19.8</td><td>V</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-59.0</td><td>-13.0</td><td>-46.0</td><td></td></tr> <tr><td>1.6950</td><td>-17.5</td><td>H</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-55.6</td><td>-13.0</td><td>-42.6</td><td></td></tr> <tr><td>2.5425</td><td>-21.2</td><td>H</td><td>3.0</td><td>39.6</td><td>1.0</td><td>-59.8</td><td>-13.0</td><td>-46.8</td><td></td></tr> <tr><td>3.3900</td><td>-20.6</td><td>H</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-59.8</td><td>-13.0</td><td>-46.8</td><td></td></tr> </tbody> </table>	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Channel (825.5MHz)										1.6510	-13.4	V	3.0	39.1	1.0	-51.5	-13.0	-38.5		2.4675	-19.8	V	3.0	39.5	1.0	-58.3	-13.0	-45.3		3.3020	-19.8	V	3.0	40.1	1.0	-58.9	-13.0	-45.9		1.6510	-14.0	H	3.0	39.1	1.0	-52.1	-13.0	-39.1		2.4675	-23.2	H	3.0	39.5	1.0	-61.7	-13.0	-48.7		3.3020	-20.2	H	3.0	40.1	1.0	-59.3	-13.0	-46.3		Mid Channel (836.5MHz)										1.6730	-18.5	V	3.0	39.1	1.0	-56.6	-13.0	-43.6		2.5090	-16.6	V	3.0	39.5	1.0	-55.1	-13.0	-42.1		3.3460	-19.4	V	3.0	40.1	1.0	-58.6	-13.0	-45.6		1.6730	-18.9	H	3.0	39.1	1.0	-57.0	-13.0	-44.0		2.5090	-20.2	H	3.0	39.5	1.0	-58.8	-13.0	-45.8		3.3460	-20.9	H	3.0	40.1	1.0	-60.0	-13.0	-47.0		High Channel (847.5MHz)										1.6950	-16.8	V	3.0	39.1	1.0	-54.9	-13.0	-41.9		2.5425	-18.0	V	3.0	39.6	1.0	-56.6	-13.0	-43.6		3.3900	-19.8	V	3.0	40.2	1.0	-59.0	-13.0	-46.0		1.6950	-17.5	H	3.0	39.1	1.0	-55.6	-13.0	-42.6		2.5425	-21.2	H	3.0	39.6	1.0	-59.8	-13.0	-46.8		3.3900	-20.6	H	3.0	40.2	1.0	-59.8	-13.0	-46.8		Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																					
Low Channel (825.5MHz)																																																																																																																																																																																																																														
1.6510	-13.4	V	3.0	39.1	1.0	-51.5	-13.0	-38.5																																																																																																																																																																																																																						
2.4675	-19.8	V	3.0	39.5	1.0	-58.3	-13.0	-45.3																																																																																																																																																																																																																						
3.3020	-19.8	V	3.0	40.1	1.0	-58.9	-13.0	-45.9																																																																																																																																																																																																																						
1.6510	-14.0	H	3.0	39.1	1.0	-52.1	-13.0	-39.1																																																																																																																																																																																																																						
2.4675	-23.2	H	3.0	39.5	1.0	-61.7	-13.0	-48.7																																																																																																																																																																																																																						
3.3020	-20.2	H	3.0	40.1	1.0	-59.3	-13.0	-46.3																																																																																																																																																																																																																						
Mid Channel (836.5MHz)																																																																																																																																																																																																																														
1.6730	-18.5	V	3.0	39.1	1.0	-56.6	-13.0	-43.6																																																																																																																																																																																																																						
2.5090	-16.6	V	3.0	39.5	1.0	-55.1	-13.0	-42.1																																																																																																																																																																																																																						
3.3460	-19.4	V	3.0	40.1	1.0	-58.6	-13.0	-45.6																																																																																																																																																																																																																						
1.6730	-18.9	H	3.0	39.1	1.0	-57.0	-13.0	-44.0																																																																																																																																																																																																																						
2.5090	-20.2	H	3.0	39.5	1.0	-58.8	-13.0	-45.8																																																																																																																																																																																																																						
3.3460	-20.9	H	3.0	40.1	1.0	-60.0	-13.0	-47.0																																																																																																																																																																																																																						
High Channel (847.5MHz)																																																																																																																																																																																																																														
1.6950	-16.8	V	3.0	39.1	1.0	-54.9	-13.0	-41.9																																																																																																																																																																																																																						
2.5425	-18.0	V	3.0	39.6	1.0	-56.6	-13.0	-43.6																																																																																																																																																																																																																						
3.3900	-19.8	V	3.0	40.2	1.0	-59.0	-13.0	-46.0																																																																																																																																																																																																																						
1.6950	-17.5	H	3.0	39.1	1.0	-55.6	-13.0	-42.6																																																																																																																																																																																																																						
2.5425	-21.2	H	3.0	39.6	1.0	-59.8	-13.0	-46.8																																																																																																																																																																																																																						
3.3900	-20.6	H	3.0	40.2	1.0	-59.8	-13.0	-46.8																																																																																																																																																																																																																						
LTE Band 5 3MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 02-04-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / Z-Position Mode: TX, LTE BAND 5, 3MHz BW, 16QAM																																																																																																																																																																																																																													
	<table border="1"> <tr> <th>Chamber</th> <th>Pre-amplifier</th> <th>Filter</th> <th>Limit</th> </tr> <tr> <td>Chamber 2</td> <td>AFS42</td> <td>Filter 1</td> <td>Part 22</td> </tr> </table>	Chamber	Pre-amplifier	Filter	Limit	Chamber 2	AFS42	Filter 1	Part 22																																																																																																																																																																																																																					
Chamber	Pre-amplifier	Filter	Limit																																																																																																																																																																																																																											
Chamber 2	AFS42	Filter 1	Part 22																																																																																																																																																																																																																											
	<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr><td colspan="10">Low Channel (825.5MHz)</td></tr> <tr><td>1.6510</td><td>-15.9</td><td>V</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-54.0</td><td>-13.0</td><td>-41.0</td><td></td></tr> <tr><td>2.4675</td><td>-20.8</td><td>V</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-59.3</td><td>-13.0</td><td>-46.3</td><td></td></tr> <tr><td>3.3020</td><td>-20.0</td><td>V</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-59.1</td><td>-13.0</td><td>-46.1</td><td></td></tr> <tr><td>1.6510</td><td>-14.3</td><td>H</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-52.5</td><td>-13.0</td><td>-39.5</td><td></td></tr> <tr><td>2.4675</td><td>-23.5</td><td>H</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-62.0</td><td>-13.0</td><td>-49.0</td><td></td></tr> <tr><td>3.3020</td><td>-20.6</td><td>H</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-59.7</td><td>-13.0</td><td>-46.7</td><td></td></tr> <tr><td colspan="10">Mid Channel (836.5MHz)</td></tr> <tr><td>1.6730</td><td>-20.0</td><td>V</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-58.1</td><td>-13.0</td><td>-45.1</td><td></td></tr> <tr><td>2.5090</td><td>-19.0</td><td>V</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-57.5</td><td>-13.0</td><td>-44.5</td><td></td></tr> <tr><td>3.3460</td><td>-20.8</td><td>V</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-60.0</td><td>-13.0</td><td>-47.0</td><td></td></tr> <tr><td>1.6730</td><td>-21.6</td><td>H</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-59.7</td><td>-13.0</td><td>-46.7</td><td></td></tr> <tr><td>2.5090</td><td>-22.2</td><td>H</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-60.8</td><td>-13.0</td><td>-47.8</td><td></td></tr> <tr><td>3.3460</td><td>-21.6</td><td>H</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-60.7</td><td>-13.0</td><td>-47.7</td><td></td></tr> <tr><td colspan="10">High Channel (847.5MHz)</td></tr> <tr><td>1.6950</td><td>-18.3</td><td>V</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-56.4</td><td>-13.0</td><td>-43.4</td><td></td></tr> <tr><td>2.5425</td><td>-19.3</td><td>V</td><td>3.0</td><td>39.6</td><td>1.0</td><td>-57.9</td><td>-13.0</td><td>-44.9</td><td></td></tr> <tr><td>3.3900</td><td>-20.4</td><td>V</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-59.6</td><td>-13.0</td><td>-46.6</td><td></td></tr> <tr><td>1.6950</td><td>-18.5</td><td>H</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-56.6</td><td>-13.0</td><td>-43.6</td><td></td></tr> <tr><td>2.5425</td><td>-22.0</td><td>H</td><td>3.0</td><td>39.6</td><td>1.0</td><td>-60.5</td><td>-13.0</td><td>-47.5</td><td></td></tr> <tr><td>3.3900</td><td>-21.0</td><td>H</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-60.1</td><td>-13.0</td><td>-47.1</td><td></td></tr> </tbody> </table>	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Channel (825.5MHz)										1.6510	-15.9	V	3.0	39.1	1.0	-54.0	-13.0	-41.0		2.4675	-20.8	V	3.0	39.5	1.0	-59.3	-13.0	-46.3		3.3020	-20.0	V	3.0	40.1	1.0	-59.1	-13.0	-46.1		1.6510	-14.3	H	3.0	39.1	1.0	-52.5	-13.0	-39.5		2.4675	-23.5	H	3.0	39.5	1.0	-62.0	-13.0	-49.0		3.3020	-20.6	H	3.0	40.1	1.0	-59.7	-13.0	-46.7		Mid Channel (836.5MHz)										1.6730	-20.0	V	3.0	39.1	1.0	-58.1	-13.0	-45.1		2.5090	-19.0	V	3.0	39.5	1.0	-57.5	-13.0	-44.5		3.3460	-20.8	V	3.0	40.1	1.0	-60.0	-13.0	-47.0		1.6730	-21.6	H	3.0	39.1	1.0	-59.7	-13.0	-46.7		2.5090	-22.2	H	3.0	39.5	1.0	-60.8	-13.0	-47.8		3.3460	-21.6	H	3.0	40.1	1.0	-60.7	-13.0	-47.7		High Channel (847.5MHz)										1.6950	-18.3	V	3.0	39.1	1.0	-56.4	-13.0	-43.4		2.5425	-19.3	V	3.0	39.6	1.0	-57.9	-13.0	-44.9		3.3900	-20.4	V	3.0	40.2	1.0	-59.6	-13.0	-46.6		1.6950	-18.5	H	3.0	39.1	1.0	-56.6	-13.0	-43.6		2.5425	-22.0	H	3.0	39.6	1.0	-60.5	-13.0	-47.5		3.3900	-21.0	H	3.0	40.2	1.0	-60.1	-13.0	-47.1		Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																					
Low Channel (825.5MHz)																																																																																																																																																																																																																														
1.6510	-15.9	V	3.0	39.1	1.0	-54.0	-13.0	-41.0																																																																																																																																																																																																																						
2.4675	-20.8	V	3.0	39.5	1.0	-59.3	-13.0	-46.3																																																																																																																																																																																																																						
3.3020	-20.0	V	3.0	40.1	1.0	-59.1	-13.0	-46.1																																																																																																																																																																																																																						
1.6510	-14.3	H	3.0	39.1	1.0	-52.5	-13.0	-39.5																																																																																																																																																																																																																						
2.4675	-23.5	H	3.0	39.5	1.0	-62.0	-13.0	-49.0																																																																																																																																																																																																																						
3.3020	-20.6	H	3.0	40.1	1.0	-59.7	-13.0	-46.7																																																																																																																																																																																																																						
Mid Channel (836.5MHz)																																																																																																																																																																																																																														
1.6730	-20.0	V	3.0	39.1	1.0	-58.1	-13.0	-45.1																																																																																																																																																																																																																						
2.5090	-19.0	V	3.0	39.5	1.0	-57.5	-13.0	-44.5																																																																																																																																																																																																																						
3.3460	-20.8	V	3.0	40.1	1.0	-60.0	-13.0	-47.0																																																																																																																																																																																																																						
1.6730	-21.6	H	3.0	39.1	1.0	-59.7	-13.0	-46.7																																																																																																																																																																																																																						
2.5090	-22.2	H	3.0	39.5	1.0	-60.8	-13.0	-47.8																																																																																																																																																																																																																						
3.3460	-21.6	H	3.0	40.1	1.0	-60.7	-13.0	-47.7																																																																																																																																																																																																																						
High Channel (847.5MHz)																																																																																																																																																																																																																														
1.6950	-18.3	V	3.0	39.1	1.0	-56.4	-13.0	-43.4																																																																																																																																																																																																																						
2.5425	-19.3	V	3.0	39.6	1.0	-57.9	-13.0	-44.9																																																																																																																																																																																																																						
3.3900	-20.4	V	3.0	40.2	1.0	-59.6	-13.0	-46.6																																																																																																																																																																																																																						
1.6950	-18.5	H	3.0	39.1	1.0	-56.6	-13.0	-43.6																																																																																																																																																																																																																						
2.5425	-22.0	H	3.0	39.6	1.0	-60.5	-13.0	-47.5																																																																																																																																																																																																																						
3.3900	-21.0	H	3.0	40.2	1.0	-60.1	-13.0	-47.1																																																																																																																																																																																																																						

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																																					
LTE Band 5 1.4MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-04-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / Z-Position Mode: TX LTE BAND 5, 1.4MHz BW, QPSK																																																																																																																																																																																																																																						
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter Filter 1</div> <div style="border: 1px solid black; padding: 2px;">Limit Part 22</div> </div>																																																																																																																																																																																																																																						
		<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr><td colspan="10">Low Channel (824.7MHz)</td></tr> <tr><td>1.6494</td><td>-15.9</td><td>V</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-54.0</td><td>-13.0</td><td>-41.0</td><td></td></tr> <tr><td>2.4741</td><td>-16.0</td><td>V</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-54.5</td><td>-13.0</td><td>-41.5</td><td></td></tr> <tr><td>3.2988</td><td>-19.3</td><td>V</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-58.4</td><td>-13.0</td><td>-45.4</td><td></td></tr> <tr><td>1.6494</td><td>-19.7</td><td>H</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-57.8</td><td>-13.0</td><td>-44.8</td><td></td></tr> <tr><td>2.4741</td><td>-23.1</td><td>H</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-61.7</td><td>-13.0</td><td>-48.7</td><td></td></tr> <tr><td>3.2988</td><td>-22.1</td><td>H</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-61.2</td><td>-13.0</td><td>-48.2</td><td></td></tr> <tr><td colspan="10">Mid Channel (836.5MHz)</td></tr> <tr><td>1.6730</td><td>-15.3</td><td>V</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-53.4</td><td>-13.0</td><td>-40.4</td><td></td></tr> <tr><td>2.5090</td><td>-17.6</td><td>V</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-56.2</td><td>-13.0</td><td>-43.2</td><td></td></tr> <tr><td>3.3460</td><td>-17.6</td><td>V</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-56.7</td><td>-13.0</td><td>-43.7</td><td></td></tr> <tr><td>1.6730</td><td>-19.7</td><td>H</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-57.8</td><td>-13.0</td><td>-44.8</td><td></td></tr> <tr><td>2.5090</td><td>-21.1</td><td>H</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-59.6</td><td>-13.0</td><td>-46.6</td><td></td></tr> <tr><td>3.3460</td><td>-20.3</td><td>H</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-59.4</td><td>-13.0</td><td>-46.4</td><td></td></tr> <tr><td colspan="10">High Channel (848.3MHz)</td></tr> <tr><td>1.6966</td><td>-13.9</td><td>V</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-52.0</td><td>-13.0</td><td>-39.0</td><td></td></tr> <tr><td>2.5449</td><td>-15.7</td><td>V</td><td>3.0</td><td>39.6</td><td>1.0</td><td>-54.2</td><td>-13.0</td><td>-41.2</td><td></td></tr> <tr><td>3.3932</td><td>-16.3</td><td>V</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-55.5</td><td>-13.0</td><td>-42.5</td><td></td></tr> <tr><td>1.6966</td><td>-16.8</td><td>H</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-55.0</td><td>-13.0</td><td>-42.0</td><td></td></tr> <tr><td>2.5449</td><td>-18.6</td><td>H</td><td>3.0</td><td>39.6</td><td>1.0</td><td>-57.2</td><td>-13.0</td><td>-44.2</td><td></td></tr> <tr><td>3.3932</td><td>-19.9</td><td>H</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-59.1</td><td>-13.0</td><td>-46.1</td><td></td></tr> </tbody> </table>	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Channel (824.7MHz)										1.6494	-15.9	V	3.0	39.1	1.0	-54.0	-13.0	-41.0		2.4741	-16.0	V	3.0	39.5	1.0	-54.5	-13.0	-41.5		3.2988	-19.3	V	3.0	40.1	1.0	-58.4	-13.0	-45.4		1.6494	-19.7	H	3.0	39.1	1.0	-57.8	-13.0	-44.8		2.4741	-23.1	H	3.0	39.5	1.0	-61.7	-13.0	-48.7		3.2988	-22.1	H	3.0	40.1	1.0	-61.2	-13.0	-48.2		Mid Channel (836.5MHz)										1.6730	-15.3	V	3.0	39.1	1.0	-53.4	-13.0	-40.4		2.5090	-17.6	V	3.0	39.5	1.0	-56.2	-13.0	-43.2		3.3460	-17.6	V	3.0	40.1	1.0	-56.7	-13.0	-43.7		1.6730	-19.7	H	3.0	39.1	1.0	-57.8	-13.0	-44.8		2.5090	-21.1	H	3.0	39.5	1.0	-59.6	-13.0	-46.6		3.3460	-20.3	H	3.0	40.1	1.0	-59.4	-13.0	-46.4		High Channel (848.3MHz)										1.6966	-13.9	V	3.0	39.1	1.0	-52.0	-13.0	-39.0		2.5449	-15.7	V	3.0	39.6	1.0	-54.2	-13.0	-41.2		3.3932	-16.3	V	3.0	40.2	1.0	-55.5	-13.0	-42.5		1.6966	-16.8	H	3.0	39.1	1.0	-55.0	-13.0	-42.0		2.5449	-18.6	H	3.0	39.6	1.0	-57.2	-13.0	-44.2		3.3932	-19.9	H	3.0	40.2	1.0	-59.1	-13.0	-46.1		Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.								
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																													
	Low Channel (824.7MHz)																																																																																																																																																																																																																																						
	1.6494	-15.9	V	3.0	39.1	1.0	-54.0	-13.0	-41.0																																																																																																																																																																																																																														
	2.4741	-16.0	V	3.0	39.5	1.0	-54.5	-13.0	-41.5																																																																																																																																																																																																																														
	3.2988	-19.3	V	3.0	40.1	1.0	-58.4	-13.0	-45.4																																																																																																																																																																																																																														
	1.6494	-19.7	H	3.0	39.1	1.0	-57.8	-13.0	-44.8																																																																																																																																																																																																																														
	2.4741	-23.1	H	3.0	39.5	1.0	-61.7	-13.0	-48.7																																																																																																																																																																																																																														
	3.2988	-22.1	H	3.0	40.1	1.0	-61.2	-13.0	-48.2																																																																																																																																																																																																																														
	Mid Channel (836.5MHz)																																																																																																																																																																																																																																						
	1.6730	-15.3	V	3.0	39.1	1.0	-53.4	-13.0	-40.4																																																																																																																																																																																																																														
	2.5090	-17.6	V	3.0	39.5	1.0	-56.2	-13.0	-43.2																																																																																																																																																																																																																														
	3.3460	-17.6	V	3.0	40.1	1.0	-56.7	-13.0	-43.7																																																																																																																																																																																																																														
	1.6730	-19.7	H	3.0	39.1	1.0	-57.8	-13.0	-44.8																																																																																																																																																																																																																														
	2.5090	-21.1	H	3.0	39.5	1.0	-59.6	-13.0	-46.6																																																																																																																																																																																																																														
	3.3460	-20.3	H	3.0	40.1	1.0	-59.4	-13.0	-46.4																																																																																																																																																																																																																														
	High Channel (848.3MHz)																																																																																																																																																																																																																																						
	1.6966	-13.9	V	3.0	39.1	1.0	-52.0	-13.0	-39.0																																																																																																																																																																																																																														
	2.5449	-15.7	V	3.0	39.6	1.0	-54.2	-13.0	-41.2																																																																																																																																																																																																																														
	3.3932	-16.3	V	3.0	40.2	1.0	-55.5	-13.0	-42.5																																																																																																																																																																																																																														
	1.6966	-16.8	H	3.0	39.1	1.0	-55.0	-13.0	-42.0																																																																																																																																																																																																																														
	2.5449	-18.6	H	3.0	39.6	1.0	-57.2	-13.0	-44.2																																																																																																																																																																																																																														
3.3932	-19.9	H	3.0	40.2	1.0	-59.1	-13.0	-46.1																																																																																																																																																																																																																															
LTE Band 5 1.4MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 02-04-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / Z-Position Mode: TX LTE BAND 5, 1.4MHz BW, 16QAM																																																																																																																																																																																																																																						
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter Filter 1</div> <div style="border: 1px solid black; padding: 2px;">Limit Part 22</div> </div>																																																																																																																																																																																																																																						
		<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr><td colspan="10">Low Channel (824.7MHz)</td></tr> <tr><td>1.6494</td><td>-17.9</td><td>V</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-56.0</td><td>-13.0</td><td>-43.0</td><td></td></tr> <tr><td>2.4741</td><td>-17.0</td><td>V</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-55.5</td><td>-13.0</td><td>-42.5</td><td></td></tr> <tr><td>3.2988</td><td>-19.9</td><td>V</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-59.0</td><td>-13.0</td><td>-46.0</td><td></td></tr> <tr><td>1.6494</td><td>-21.3</td><td>H</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-59.4</td><td>-13.0</td><td>-46.4</td><td></td></tr> <tr><td>2.4741</td><td>-23.6</td><td>H</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-62.1</td><td>-13.0</td><td>-49.1</td><td></td></tr> <tr><td>3.2988</td><td>-22.8</td><td>H</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-61.9</td><td>-13.0</td><td>-48.9</td><td></td></tr> <tr><td colspan="10">Mid Channel (836.5MHz)</td></tr> <tr><td>1.6730</td><td>-16.3</td><td>V</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-54.4</td><td>-13.0</td><td>-41.4</td><td></td></tr> <tr><td>2.5090</td><td>-18.6</td><td>V</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-57.1</td><td>-13.0</td><td>-44.1</td><td></td></tr> <tr><td>3.3460</td><td>-18.2</td><td>V</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-57.3</td><td>-13.0</td><td>-44.3</td><td></td></tr> <tr><td>1.6730</td><td>-21.0</td><td>H</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-59.1</td><td>-13.0</td><td>-46.1</td><td></td></tr> <tr><td>2.5090</td><td>-21.4</td><td>H</td><td>3.0</td><td>39.5</td><td>1.0</td><td>-60.0</td><td>-13.0</td><td>-47.0</td><td></td></tr> <tr><td>3.3460</td><td>-21.3</td><td>H</td><td>3.0</td><td>40.1</td><td>1.0</td><td>-60.4</td><td>-13.0</td><td>-47.4</td><td></td></tr> <tr><td colspan="10">High Channel (848.3MHz)</td></tr> <tr><td>1.6966</td><td>-15.2</td><td>V</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-53.4</td><td>-13.0</td><td>-40.4</td><td></td></tr> <tr><td>2.5449</td><td>-16.8</td><td>V</td><td>3.0</td><td>39.6</td><td>1.0</td><td>-55.3</td><td>-13.0</td><td>-42.3</td><td></td></tr> <tr><td>3.3932</td><td>-17.0</td><td>V</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-56.2</td><td>-13.0</td><td>-43.2</td><td></td></tr> <tr><td>1.6966</td><td>-17.6</td><td>H</td><td>3.0</td><td>39.1</td><td>1.0</td><td>-55.7</td><td>-13.0</td><td>-42.7</td><td></td></tr> <tr><td>2.5449</td><td>-19.3</td><td>H</td><td>3.0</td><td>39.6</td><td>1.0</td><td>-57.9</td><td>-13.0</td><td>-44.9</td><td></td></tr> <tr><td>3.3932</td><td>-20.3</td><td>H</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-59.5</td><td>-13.0</td><td>-46.5</td><td></td></tr> </tbody> </table>	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Channel (824.7MHz)										1.6494	-17.9	V	3.0	39.1	1.0	-56.0	-13.0	-43.0		2.4741	-17.0	V	3.0	39.5	1.0	-55.5	-13.0	-42.5		3.2988	-19.9	V	3.0	40.1	1.0	-59.0	-13.0	-46.0		1.6494	-21.3	H	3.0	39.1	1.0	-59.4	-13.0	-46.4		2.4741	-23.6	H	3.0	39.5	1.0	-62.1	-13.0	-49.1		3.2988	-22.8	H	3.0	40.1	1.0	-61.9	-13.0	-48.9		Mid Channel (836.5MHz)										1.6730	-16.3	V	3.0	39.1	1.0	-54.4	-13.0	-41.4		2.5090	-18.6	V	3.0	39.5	1.0	-57.1	-13.0	-44.1		3.3460	-18.2	V	3.0	40.1	1.0	-57.3	-13.0	-44.3		1.6730	-21.0	H	3.0	39.1	1.0	-59.1	-13.0	-46.1		2.5090	-21.4	H	3.0	39.5	1.0	-60.0	-13.0	-47.0		3.3460	-21.3	H	3.0	40.1	1.0	-60.4	-13.0	-47.4		High Channel (848.3MHz)										1.6966	-15.2	V	3.0	39.1	1.0	-53.4	-13.0	-40.4		2.5449	-16.8	V	3.0	39.6	1.0	-55.3	-13.0	-42.3		3.3932	-17.0	V	3.0	40.2	1.0	-56.2	-13.0	-43.2		1.6966	-17.6	H	3.0	39.1	1.0	-55.7	-13.0	-42.7		2.5449	-19.3	H	3.0	39.6	1.0	-57.9	-13.0	-44.9		3.3932	-20.3	H	3.0	40.2	1.0	-59.5	-13.0	-46.5		Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.								
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																													
	Low Channel (824.7MHz)																																																																																																																																																																																																																																						
	1.6494	-17.9	V	3.0	39.1	1.0	-56.0	-13.0	-43.0																																																																																																																																																																																																																														
	2.4741	-17.0	V	3.0	39.5	1.0	-55.5	-13.0	-42.5																																																																																																																																																																																																																														
	3.2988	-19.9	V	3.0	40.1	1.0	-59.0	-13.0	-46.0																																																																																																																																																																																																																														
	1.6494	-21.3	H	3.0	39.1	1.0	-59.4	-13.0	-46.4																																																																																																																																																																																																																														
	2.4741	-23.6	H	3.0	39.5	1.0	-62.1	-13.0	-49.1																																																																																																																																																																																																																														
	3.2988	-22.8	H	3.0	40.1	1.0	-61.9	-13.0	-48.9																																																																																																																																																																																																																														
	Mid Channel (836.5MHz)																																																																																																																																																																																																																																						
	1.6730	-16.3	V	3.0	39.1	1.0	-54.4	-13.0	-41.4																																																																																																																																																																																																																														
	2.5090	-18.6	V	3.0	39.5	1.0	-57.1	-13.0	-44.1																																																																																																																																																																																																																														
	3.3460	-18.2	V	3.0	40.1	1.0	-57.3	-13.0	-44.3																																																																																																																																																																																																																														
	1.6730	-21.0	H	3.0	39.1	1.0	-59.1	-13.0	-46.1																																																																																																																																																																																																																														
	2.5090	-21.4	H	3.0	39.5	1.0	-60.0	-13.0	-47.0																																																																																																																																																																																																																														
	3.3460	-21.3	H	3.0	40.1	1.0	-60.4	-13.0	-47.4																																																																																																																																																																																																																														
	High Channel (848.3MHz)																																																																																																																																																																																																																																						
	1.6966	-15.2	V	3.0	39.1	1.0	-53.4	-13.0	-40.4																																																																																																																																																																																																																														
	2.5449	-16.8	V	3.0	39.6	1.0	-55.3	-13.0	-42.3																																																																																																																																																																																																																														
	3.3932	-17.0	V	3.0	40.2	1.0	-56.2	-13.0	-43.2																																																																																																																																																																																																																														
	1.6966	-17.6	H	3.0	39.1	1.0	-55.7	-13.0	-42.7																																																																																																																																																																																																																														
	2.5449	-19.3	H	3.0	39.6	1.0	-57.9	-13.0	-44.9																																																																																																																																																																																																																														
3.3932	-20.3	H	3.0	40.2	1.0	-59.5	-13.0	-46.5																																																																																																																																																																																																																															

LTE Band 4

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
LTE Band 4 20MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-11-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 4, 20MHz BW, QPSK										
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier</div> <div style="border: 1px solid black; padding: 2px;">Filter</div> <div style="border: 1px solid black; padding: 2px;">Limit</div> </div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter 1</div> <div style="border: 1px solid black; padding: 2px;">FCC Part 27</div> </div>										
	f GHz	SGreading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Channel (1720MHz)										
	3.4400	-10.7	V	3.0	40.2	1.0	-49.9	-13.0	-36.9		
	5.1600	3.5	V	3.0	40.9	1.0	-36.4	-13.0	-23.4		
	6.8800	0.0	V	3.0	41.0	1.0	-40.0	-13.0	-27.0		
	3.4400	-9.6	H	3.0	40.2	1.0	-48.8	-13.0	-35.8		
	5.1600	-0.7	H	3.0	40.9	1.0	-40.6	-13.0	-27.6		
	6.8800	-5.6	H	3.0	41.0	1.0	-45.6	-13.0	-32.6		
	Mid Channel (1732.5MHz)										
	3.4650	-9.3	V	3.0	40.3	1.0	-48.5	-13.0	-35.5		
	5.1975	5.8	V	3.0	40.9	1.0	-34.1	-13.0	-21.1		
	6.9300	-0.5	V	3.0	41.0	1.0	-40.5	-13.0	-27.5		
	3.4650	-11.6	H	3.0	40.3	1.0	-50.8	-13.0	-37.8		
5.1975	7.6	H	3.0	40.9	1.0	-32.2	-13.0	-19.2			
6.9300	-3.8	H	3.0	41.0	1.0	-43.8	-13.0	-30.8			
High Channel (1745MHz)											
3.4900	-9.9	V	3.0	40.3	1.0	-49.2	-13.0	-36.2			
5.2350	2.6	V	3.0	40.9	1.0	-37.3	-13.0	-24.3			
6.9800	-1.2	V	3.0	41.0	1.0	-41.2	-13.0	-28.2			
3.4900	-11.4	H	3.0	40.3	1.0	-50.7	-13.0	-37.7			
5.2350	-0.4	H	3.0	40.9	1.0	-40.3	-13.0	-27.3			
6.9800	-1.5	H	3.0	41.0	1.0	-41.5	-13.0	-28.5			
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											
LTE Band 4 20MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 02-11-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 4, 20MHz BW, 16QAM										
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier</div> <div style="border: 1px solid black; padding: 2px;">Filter</div> <div style="border: 1px solid black; padding: 2px;">Limit</div> </div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter 1</div> <div style="border: 1px solid black; padding: 2px;">FCC Part 27</div> </div>										
	f GHz	SGreading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Channel (1720MHz)										
	3.4400	-11.0	V	3.0	40.2	1.0	-50.2	-13.0	-37.2		
	5.1600	3.0	V	3.0	40.9	1.0	-36.9	-13.0	-23.9		
	6.8800	-0.9	V	3.0	41.0	1.0	-40.9	-13.0	-27.9		
	3.4400	-10.2	H	3.0	40.2	1.0	-49.4	-13.0	-36.4		
	5.1600	-1.2	H	3.0	40.9	1.0	-41.1	-13.0	-28.1		
	6.8800	-6.1	H	3.0	41.0	1.0	-46.1	-13.0	-33.1		
	Mid Channel (1732.5MHz)										
	3.4650	-9.6	V	3.0	40.3	1.0	-48.8	-13.0	-35.8		
	5.1975	5.6	V	3.0	40.9	1.0	-34.3	-13.0	-21.3		
	6.9300	-1.2	V	3.0	41.0	1.0	-41.2	-13.0	-28.2		
	3.4650	-11.7	H	3.0	40.3	1.0	-50.9	-13.0	-37.9		
5.1975	7.5	H	3.0	40.9	1.0	-32.4	-13.0	-19.4			
6.9300	-4.2	H	3.0	41.0	1.0	-44.2	-13.0	-31.2			
High Channel (1745MHz)											
3.4900	-10.0	V	3.0	40.3	1.0	-49.3	-13.0	-36.3			
5.2350	3.1	V	3.0	40.9	1.0	-36.8	-13.0	-23.8			
6.9800	-1.4	V	3.0	41.0	1.0	-41.4	-13.0	-28.4			
3.4900	-11.4	H	3.0	40.3	1.0	-50.7	-13.0	-37.7			
5.2350	-0.3	H	3.0	40.9	1.0	-40.2	-13.0	-27.2			
6.9800	-1.5	H	3.0	41.0	1.0	-41.5	-13.0	-28.5			
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement										
LTE Band 4 15MHz QPSK	Company: Samsung											
	Project #: 16K22699											
	Date: 02-05-16											
	Test Engineer: Steven Kim											
	Configuration: EUT / AC Adapter / Ear Phone / X-Position											
	Mode: TX, LTE BAND 4, 15MHz BW, QPSK											
			Chamber		Pre-amplifier		Filter		Limit			
			Chamber 2		AFS42		Filter 1		FCC Part 27			
			f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
			Low Channel (1717.5MHz)									
			3.4350	-11.4	V	3.0	40.2	1.0	-50.6	-13.0	-37.6	
			5.1525	5.8	V	3.0	40.9	1.0	-34.1	-13.0	-21.1	
			6.8700	-1.2	V	3.0	41.0	1.0	-41.2	-13.0	-28.2	
			3.4350	-13.1	H	3.0	40.2	1.0	-52.3	-13.0	-39.3	
			5.1525	-1.2	H	3.0	40.9	1.0	-41.1	-13.0	-28.1	
			6.8700	-2.2	H	3.0	41.0	1.0	-42.2	-13.0	-29.2	
			Mid Channel (1732.5MHz)									
			3.4650	-8.3	V	3.0	40.3	1.0	-47.5	-13.0	-34.5	
			5.1975	7.6	V	3.0	40.9	1.0	-32.3	-13.0	-19.3	
			6.9300	0.3	V	3.0	41.0	1.0	-39.7	-13.0	-26.7	
			3.4650	-9.7	H	3.0	40.3	1.0	-49.0	-13.0	-36.0	
			5.1975	0.5	H	3.0	40.9	1.0	-39.4	-13.0	-26.4	
			6.9300	-0.5	H	3.0	41.0	1.0	-40.5	-13.0	-27.5	
			High Channel (1747.5MHz)									
			3.4950	-6.2	V	3.0	40.3	1.0	-45.5	-13.0	-32.5	
		5.2425	4.4	V	3.0	40.9	1.0	-35.5	-13.0	-22.5		
		6.9900	-2.6	V	3.0	41.0	1.0	-42.6	-13.0	-29.6		
		3.4950	-7.9	H	3.0	40.3	1.0	-47.2	-13.0	-34.2		
		5.2425	0.2	H	3.0	40.9	1.0	-39.7	-13.0	-26.7		
		6.9900	-4.2	H	3.0	41.0	1.0	-44.2	-13.0	-31.2		
		Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										
LTE Band 4 15MHz 16QAM	Company: Samsung											
	Project #: 16K22699											
	Date: 02-05-16											
	Test Engineer: Steven Kim											
	Configuration: EUT / AC Adapter / Ear Phone / X-Position											
	Mode: TX, LTE BAND 4, 15MHz BW, 16QAM											
			Chamber		Pre-amplifier		Filter		Limit			
			Chamber 2		AFS42		Filter 1		FCC Part 27			
			f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
			Low Channel (1717.5MHz)									
			3.4350	-12.7	V	3.0	40.2	1.0	-52.0	-13.0	-39.0	
			5.1525	6.8	V	3.0	40.9	1.0	-33.1	-13.0	-20.1	
			6.8700	-2.1	V	3.0	41.0	1.0	-42.1	-13.0	-29.1	
			3.4350	-13.5	H	3.0	40.2	1.0	-52.8	-13.0	-39.8	
			5.1525	-2.1	H	3.0	40.9	1.0	-42.0	-13.0	-29.0	
			6.8700	-2.8	H	3.0	41.0	1.0	-42.8	-13.0	-29.8	
			Mid Channel (1732.5MHz)									
			3.4650	-8.9	V	3.0	40.3	1.0	-48.2	-13.0	-35.2	
			5.1975	7.5	V	3.0	40.9	1.0	-32.4	-13.0	-19.4	
			6.9300	0.0	V	3.0	41.0	1.0	-40.0	-13.0	-27.0	
			3.4650	-10.2	H	3.0	40.3	1.0	-49.4	-13.0	-36.4	
			5.1975	0.3	H	3.0	40.9	1.0	-39.6	-13.0	-26.6	
			6.9300	-0.7	H	3.0	41.0	1.0	-40.7	-13.0	-27.7	
			High Channel (1747.5MHz)									
			3.4950	-6.9	V	3.0	40.3	1.0	-46.2	-13.0	-33.2	
		5.2425	3.6	V	3.0	40.9	1.0	-36.2	-13.0	-23.2		
		6.9900	-3.3	V	3.0	41.0	1.0	-43.3	-13.0	-30.3		
		3.4950	-8.5	H	3.0	40.3	1.0	-47.7	-13.0	-34.7		
		5.2425	-0.5	H	3.0	40.9	1.0	-40.4	-13.0	-27.4		
		6.9900	-4.8	H	3.0	41.0	1.0	-44.8	-13.0	-31.8		
		Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement											
LTE	Band 4	Company: Samsung											
		Project #: 16K22699	Date: 02-05-16	Test Engineer: Steven Kim	EUT / AC Adapter / Ear Phone / X-Position						Mode: TX, LTE BAND 4, 10MHz BW, QPSK		
10MHz	QPSK	Chamber		Pre-amplifier		Filter		Limit					
		Chamber 2		AFS42		Filter 1		FCC Part 27					
f GHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes				
Low Channel (1715MHz)													
3.4300	-12.8	V	3.0	40.2	1.0	-52.0	-13.0	-39.0					
5.1450	7.9	V	3.0	40.9	1.0	-32.0	-13.0	-19.0					
6.8600	7.0	V	3.0	41.0	1.0	-33.0	-13.0	-20.0					
3.4300	-16.2	H	3.0	40.2	1.0	-55.4	-13.0	-42.4					
5.1450	4.2	H	3.0	40.9	1.0	-35.7	-13.0	-22.7					
6.8600	2.6	H	3.0	41.0	1.0	-37.4	-13.0	-24.4					
Mid Channel (1732.5MHz)													
3.4650	-7.7	V	3.0	40.3	1.0	-46.9	-13.0	-33.9					
5.1975	2.3	V	3.0	40.9	1.0	-37.6	-13.0	-24.6					
6.9300	-2.6	V	3.0	41.0	1.0	-42.6	-13.0	-29.6					
3.4650	-15.4	H	3.0	40.3	1.0	-54.6	-13.0	-41.6					
5.1975	2.1	H	3.0	40.9	1.0	-37.8	-13.0	-24.8					
6.9300	-0.4	H	3.0	41.0	1.0	-40.4	-13.0	-27.4					
High Channel (1750MHz)													
3.5000	-8.6	V	3.0	40.3	1.0	-47.9	-13.0	-34.9					
5.2500	8.7	V	3.0	40.9	1.0	-31.2	-13.0	-18.2					
7.0000	4.5	V	3.0	41.0	1.0	-35.6	-13.0	-22.6					
3.5000	-8.4	H	3.0	40.3	1.0	-47.7	-13.0	-34.7					
5.2500	1.4	H	3.0	40.9	1.0	-38.4	-13.0	-25.4					
7.0000	0.1	H	3.0	41.0	1.0	-39.9	-13.0	-26.9					
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.													
		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement											
		Company: Samsung											
		Project #: 16K22699	Date: 02-05-16	Test Engineer: Steven Kim	EUT / AC Adapter / Ear Phone / X-Position						Mode: TX, LTE BAND 4, 10MHz BW, 16QAM		
		Chamber		Pre-amplifier		Filter		Limit					
		Chamber 2		AFS42		Filter 1		FCC Part 27					
f GHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes				
Low Channel (1715MHz)													
3.4300	-12.8	V	3.0	40.2	1.0	-52.0	-13.0	-39.0					
5.1450	7.4	V	3.0	40.9	1.0	-32.5	-13.0	-19.5					
6.8600	6.5	V	3.0	41.0	1.0	-33.5	-13.0	-20.5					
3.4300	-16.2	H	3.0	40.2	1.0	-55.4	-13.0	-42.4					
5.1450	3.7	H	3.0	40.9	1.0	-36.2	-13.0	-23.2					
6.8600	2.0	H	3.0	41.0	1.0	-38.0	-13.0	-25.0					
Mid Channel (1732.5MHz)													
3.4650	-10.4	V	3.0	40.3	1.0	-49.7	-13.0	-36.7					
5.1975	2.2	V	3.0	40.9	1.0	-37.7	-13.0	-24.7					
6.9300	-3.0	V	3.0	41.0	1.0	-43.0	-13.0	-30.0					
3.4650	-15.2	H	3.0	40.3	1.0	-54.5	-13.0	-41.5					
5.1975	2.0	H	3.0	40.9	1.0	-37.9	-13.0	-24.9					
6.9300	-0.8	H	3.0	41.0	1.0	-40.8	-13.0	-27.8					
High Channel (1750MHz)													
3.5000	-8.1	V	3.0	40.3	1.0	-47.4	-13.0	-34.4					
5.2500	8.8	V	3.0	40.9	1.0	-31.1	-13.0	-18.1					
7.0000	4.6	V	3.0	41.0	1.0	-35.4	-13.0	-22.4					
3.5000	-8.6	H	3.0	40.3	1.0	-47.9	-13.0	-34.9					
5.2500	1.8	H	3.0	40.9	1.0	-38.1	-13.0	-25.1					
7.0000	-0.3	H	3.0	41.0	1.0	-40.3	-13.0	-27.3					
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.													

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
LTE Band 4 5MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-05-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 4, 5MHz BW, QPSK										
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter Filter 1</div> <div style="border: 1px solid black; padding: 2px;">Limit FCC Part 27</div> </div>										
		f GHz	SGreading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
		Low Channel (1712.5MHz)									
		3.4250	-10.3	V	3.0	40.2	1.0	-49.5	-13.0	-36.5	
		5.1375	1.7	V	3.0	40.9	1.0	-38.2	-13.0	-25.2	
		6.8500	-15.9	V	3.0	41.0	1.0	-55.8	-13.0	-42.8	
		3.4250	-11.0	H	3.0	40.2	1.0	-50.2	-13.0	-37.2	
		5.1375	-1.4	H	3.0	40.9	1.0	-41.3	-13.0	-28.3	
		6.8500	-15.8	H	3.0	41.0	1.0	-55.8	-13.0	-42.8	
		Mid Channel (1732.5MHz)									
		3.4650	-14.4	V	3.0	40.3	1.0	-53.6	-13.0	-40.6	
		5.1975	4.9	V	3.0	40.9	1.0	-34.9	-13.0	-21.9	
		6.9300	-5.5	V	3.0	41.0	1.0	-45.5	-13.0	-32.5	
		3.4650	-11.2	H	3.0	40.3	1.0	-50.5	-13.0	-37.5	
		5.1975	2.4	H	3.0	40.9	1.0	-37.5	-13.0	-24.5	
		6.9300	-5.4	H	3.0	41.0	1.0	-45.4	-13.0	-32.4	
		High Channel (1752.5MHz)									
		3.5050	-6.7	V	3.0	40.3	1.0	-46.0	-13.0	-33.0	
		5.2575	5.5	V	3.0	40.9	1.0	-34.4	-13.0	-21.4	
	7.0100	-5.4	V	3.0	41.0	1.0	-45.5	-13.0	-32.5		
	3.5050	-9.8	H	3.0	40.3	1.0	-49.1	-13.0	-36.1		
	5.2575	1.3	H	3.0	40.9	1.0	-38.5	-13.0	-25.5		
	7.0100	-3.1	H	3.0	41.0	1.0	-43.1	-13.0	-30.1		
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										
LTE Band 4 5MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 02-05-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 7, 5MHz BW, 16QAM										
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter Filter 1</div> <div style="border: 1px solid black; padding: 2px;">Limit FCC Part 27</div> </div>										
		f GHz	SGreading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
		Low Channel (1712.5MHz)									
		3.4250	-10.3	V	3.0	40.2	1.0	-49.6	-13.0	-36.6	
		5.1375	1.6	V	3.0	40.9	1.0	-38.3	-13.0	-25.3	
		6.8500	-15.9	V	3.0	41.0	1.0	-55.8	-13.0	-42.8	
		3.4250	-11.2	H	3.0	40.2	1.0	-50.5	-13.0	-37.5	
		5.1375	-1.7	H	3.0	40.9	1.0	-41.6	-13.0	-28.6	
		6.8500	-15.8	H	3.0	41.0	1.0	-55.8	-13.0	-42.8	
		Mid Channel (1732.5MHz)									
		3.4650	-15.2	V	3.0	40.3	1.0	-54.4	-13.0	-41.4	
		5.1975	4.3	V	3.0	40.9	1.0	-35.6	-13.0	-22.6	
		6.9300	-6.6	V	3.0	41.0	1.0	-46.6	-13.0	-33.6	
		3.4650	-11.8	H	3.0	40.3	1.0	-51.0	-13.0	-38.0	
		5.1975	2.9	H	3.0	40.9	1.0	-36.9	-13.0	-23.9	
		6.9300	-5.1	H	3.0	41.0	1.0	-45.1	-13.0	-32.1	
		High Channel (1752.5MHz)									
		3.5050	-7.3	V	3.0	40.3	1.0	-46.6	-13.0	-33.6	
		5.2575	4.4	V	3.0	40.9	1.0	-35.4	-13.0	-22.4	
	7.0100	-6.2	V	3.0	41.0	1.0	-46.2	-13.0	-33.2		
	3.5050	-10.7	H	3.0	40.3	1.0	-50.0	-13.0	-37.0		
	5.2575	0.4	H	3.0	40.9	1.0	-39.4	-13.0	-26.4		
	7.0100	-3.9	H	3.0	41.0	1.0	-43.9	-13.0	-30.9		
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
LTE Band 4 3MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 4, 3MHz BW, QPSK		Chamber Chamber 2		Pre-amplifier AFS42		Filter Filter 1		Limit FCC Part 27		
	f GHz	SG reading (dBm)	Ant. Pol (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Channel (1711.5MHz)										
	3.4230	-7.9	V	3.0	40.2	1.0	-47.1	-13.0	-34.1		
	5.1345	6.2	V	3.0	40.9	1.0	-33.7	-13.0	-20.7		
	6.8460	-0.8	V	3.0	41.0	1.0	-40.8	-13.0	-27.8		
	3.4230	-11.2	H	3.0	40.2	1.0	-50.4	-13.0	-37.4		
	5.1345	-0.7	H	3.0	40.9	1.0	-40.6	-13.0	-27.6		
	6.8460	-3.5	H	3.0	41.0	1.0	-43.5	-13.0	-30.5		
	Mid Channel (1732.5MHz)										
3.4650	-17.0	V	3.0	40.3	1.0	-56.3	-13.0	-43.3			
5.1975	6.2	V	3.0	40.9	1.0	-33.7	-13.0	-20.7			
6.9300	-5.2	V	3.0	41.0	1.0	-45.2	-13.0	-32.2			
3.4650	-16.4	H	3.0	40.3	1.0	-55.6	-13.0	-42.6			
5.1975	1.9	H	3.0	40.9	1.0	-37.9	-13.0	-24.9			
6.9300	-5.1	H	3.0	41.0	1.0	-45.1	-13.0	-32.1			
High Channel (1753.5MHz)											
3.5070	-16.8	V	3.0	40.3	1.0	-56.1	-13.0	-43.1			
5.2605	4.9	V	3.0	40.9	1.0	-34.9	-13.0	-21.9			
7.0140	-6.6	V	3.0	41.0	1.0	-46.6	-13.0	-33.6			
3.5070	-16.4	H	3.0	40.3	1.0	-55.7	-13.0	-42.7			
5.2605	4.8	H	3.0	40.9	1.0	-35.1	-13.0	-22.1			
7.0140	-10.0	H	3.0	41.0	1.0	-50.0	-13.0	-37.0			
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											
LTE Band 4 3MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 4, 3MHz BW, 16QAM		Chamber Chamber 2		Pre-amplifier AFS42		Filter Filter 1		Limit FCC Part 27		
	f GHz	SG reading (dBm)	Ant. Pol (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Channel (1711.5MHz)										
	3.4230	-7.6	V	3.0	40.2	1.0	-46.8	-13.0	-33.8		
	5.1345	7.2	V	3.0	40.9	1.0	-32.7	-13.0	-19.7		
	6.8460	0.4	V	3.0	41.0	1.0	-39.6	-13.0	-26.6		
	3.4230	-11.6	H	3.0	40.2	1.0	-50.8	-13.0	-37.8		
	5.1345	0.0	H	3.0	40.9	1.0	-39.9	-13.0	-26.9		
	6.8460	-4.5	H	3.0	41.0	1.0	-44.5	-13.0	-31.5		
	Mid Channel (1732.5MHz)										
3.4650	-16.6	V	3.0	40.3	1.0	-55.9	-13.0	-42.9			
5.1975	5.3	V	3.0	40.9	1.0	-34.6	-13.0	-21.6			
6.9300	-4.8	V	3.0	41.0	1.0	-44.8	-13.0	-31.8			
3.4650	-17.1	H	3.0	40.3	1.0	-56.3	-13.0	-43.3			
5.1975	1.1	H	3.0	40.9	1.0	-38.7	-13.0	-25.7			
6.9300	-4.7	H	3.0	41.0	1.0	-44.7	-13.0	-31.7			
High Channel (1752.5MHz)											
3.5070	-17.3	V	3.0	40.3	1.0	-56.6	-13.0	-43.6			
5.2605	5.2	V	3.0	40.9	1.0	-34.7	-13.0	-21.7			
7.0140	-6.4	V	3.0	41.0	1.0	-46.4	-13.0	-33.4			
3.5070	-15.6	H	3.0	40.3	1.0	-54.8	-13.0	-41.8			
5.2605	5.5	H	3.0	40.9	1.0	-34.4	-13.0	-21.4			
7.0140	-9.6	H	3.0	41.0	1.0	-49.6	-13.0	-36.6			
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.											

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																												
LTE Band 4 1.4MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 4, 1.4MHz BW, QPSK																																																																																																																																																																																																																													
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier</div> <div style="border: 1px solid black; padding: 2px;">Filter</div> <div style="border: 1px solid black; padding: 2px;">Limit</div> </div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter 1</div> <div style="border: 1px solid black; padding: 2px;">FCC Part 27</div> </div>																																																																																																																																																																																																																													
		<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr><td colspan="10">Low Channel (1710.7MHz)</td></tr> <tr><td>3.4214</td><td>-8.0</td><td>V</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-47.3</td><td>-13.0</td><td>-34.3</td><td></td></tr> <tr><td>5.1321</td><td>3.4</td><td>V</td><td>3.0</td><td>40.9</td><td>1.0</td><td>-36.5</td><td>-13.0</td><td>-23.5</td><td></td></tr> <tr><td>6.8428</td><td>-1.7</td><td>V</td><td>3.0</td><td>41.0</td><td>1.0</td><td>-41.6</td><td>-13.0</td><td>-28.6</td><td></td></tr> <tr><td>3.4214</td><td>-12.6</td><td>H</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-51.8</td><td>-13.0</td><td>-38.8</td><td></td></tr> <tr><td>5.1321</td><td>-0.6</td><td>H</td><td>3.0</td><td>40.9</td><td>1.0</td><td>-40.5</td><td>-13.0</td><td>-27.5</td><td></td></tr> <tr><td>6.8428</td><td>-3.2</td><td>H</td><td>3.0</td><td>41.0</td><td>1.0</td><td>-43.2</td><td>-13.0</td><td>-30.2</td><td></td></tr> <tr><td colspan="10">Mid Channel (1732.5MHz)</td></tr> <tr><td>3.4650</td><td>-18.6</td><td>V</td><td>3.0</td><td>40.3</td><td>1.0</td><td>-57.8</td><td>-13.0</td><td>-44.8</td><td></td></tr> <tr><td>5.1975</td><td>4.1</td><td>V</td><td>3.0</td><td>40.9</td><td>1.0</td><td>-35.8</td><td>-13.0</td><td>-22.8</td><td></td></tr> <tr><td>6.9300</td><td>-0.9</td><td>V</td><td>3.0</td><td>41.0</td><td>1.0</td><td>-40.9</td><td>-13.0</td><td>-27.9</td><td></td></tr> <tr><td>3.4650</td><td>-14.5</td><td>H</td><td>3.0</td><td>40.3</td><td>1.0</td><td>-53.8</td><td>-13.0</td><td>-40.8</td><td></td></tr> <tr><td>5.1975</td><td>1.4</td><td>H</td><td>3.0</td><td>40.9</td><td>1.0</td><td>-38.5</td><td>-13.0</td><td>-25.5</td><td></td></tr> <tr><td>6.9300</td><td>0.3</td><td>H</td><td>3.0</td><td>41.0</td><td>1.0</td><td>-39.7</td><td>-13.0</td><td>-26.7</td><td></td></tr> <tr><td colspan="10">High Channel (1754.3MHz)</td></tr> <tr><td>3.5086</td><td>-13.5</td><td>V</td><td>3.0</td><td>40.3</td><td>1.0</td><td>-52.8</td><td>-13.0</td><td>-39.8</td><td></td></tr> <tr><td>5.2629</td><td>5.4</td><td>V</td><td>3.0</td><td>40.9</td><td>1.0</td><td>-34.5</td><td>-13.0</td><td>-21.5</td><td></td></tr> <tr><td>7.0172</td><td>-4.5</td><td>V</td><td>3.0</td><td>41.0</td><td>1.0</td><td>-44.5</td><td>-13.0</td><td>-31.5</td><td></td></tr> <tr><td>3.5086</td><td>-12.0</td><td>H</td><td>3.0</td><td>40.3</td><td>1.0</td><td>-51.3</td><td>-13.0</td><td>-38.3</td><td></td></tr> <tr><td>5.2629</td><td>2.4</td><td>H</td><td>3.0</td><td>40.9</td><td>1.0</td><td>-37.5</td><td>-13.0</td><td>-24.5</td><td></td></tr> <tr><td>7.0172</td><td>-3.9</td><td>H</td><td>3.0</td><td>41.0</td><td>1.0</td><td>-43.9</td><td>-13.0</td><td>-30.9</td><td></td></tr> </tbody> </table>	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Channel (1710.7MHz)										3.4214	-8.0	V	3.0	40.2	1.0	-47.3	-13.0	-34.3		5.1321	3.4	V	3.0	40.9	1.0	-36.5	-13.0	-23.5		6.8428	-1.7	V	3.0	41.0	1.0	-41.6	-13.0	-28.6		3.4214	-12.6	H	3.0	40.2	1.0	-51.8	-13.0	-38.8		5.1321	-0.6	H	3.0	40.9	1.0	-40.5	-13.0	-27.5		6.8428	-3.2	H	3.0	41.0	1.0	-43.2	-13.0	-30.2		Mid Channel (1732.5MHz)										3.4650	-18.6	V	3.0	40.3	1.0	-57.8	-13.0	-44.8		5.1975	4.1	V	3.0	40.9	1.0	-35.8	-13.0	-22.8		6.9300	-0.9	V	3.0	41.0	1.0	-40.9	-13.0	-27.9		3.4650	-14.5	H	3.0	40.3	1.0	-53.8	-13.0	-40.8		5.1975	1.4	H	3.0	40.9	1.0	-38.5	-13.0	-25.5		6.9300	0.3	H	3.0	41.0	1.0	-39.7	-13.0	-26.7		High Channel (1754.3MHz)										3.5086	-13.5	V	3.0	40.3	1.0	-52.8	-13.0	-39.8		5.2629	5.4	V	3.0	40.9	1.0	-34.5	-13.0	-21.5		7.0172	-4.5	V	3.0	41.0	1.0	-44.5	-13.0	-31.5		3.5086	-12.0	H	3.0	40.3	1.0	-51.3	-13.0	-38.3		5.2629	2.4	H	3.0	40.9	1.0	-37.5	-13.0	-24.5		7.0172	-3.9	H	3.0	41.0	1.0	-43.9	-13.0	-30.9	
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																				
	Low Channel (1710.7MHz)																																																																																																																																																																																																																													
	3.4214	-8.0	V	3.0	40.2	1.0	-47.3	-13.0	-34.3																																																																																																																																																																																																																					
	5.1321	3.4	V	3.0	40.9	1.0	-36.5	-13.0	-23.5																																																																																																																																																																																																																					
	6.8428	-1.7	V	3.0	41.0	1.0	-41.6	-13.0	-28.6																																																																																																																																																																																																																					
	3.4214	-12.6	H	3.0	40.2	1.0	-51.8	-13.0	-38.8																																																																																																																																																																																																																					
	5.1321	-0.6	H	3.0	40.9	1.0	-40.5	-13.0	-27.5																																																																																																																																																																																																																					
	6.8428	-3.2	H	3.0	41.0	1.0	-43.2	-13.0	-30.2																																																																																																																																																																																																																					
	Mid Channel (1732.5MHz)																																																																																																																																																																																																																													
	3.4650	-18.6	V	3.0	40.3	1.0	-57.8	-13.0	-44.8																																																																																																																																																																																																																					
	5.1975	4.1	V	3.0	40.9	1.0	-35.8	-13.0	-22.8																																																																																																																																																																																																																					
	6.9300	-0.9	V	3.0	41.0	1.0	-40.9	-13.0	-27.9																																																																																																																																																																																																																					
3.4650	-14.5	H	3.0	40.3	1.0	-53.8	-13.0	-40.8																																																																																																																																																																																																																						
5.1975	1.4	H	3.0	40.9	1.0	-38.5	-13.0	-25.5																																																																																																																																																																																																																						
6.9300	0.3	H	3.0	41.0	1.0	-39.7	-13.0	-26.7																																																																																																																																																																																																																						
High Channel (1754.3MHz)																																																																																																																																																																																																																														
3.5086	-13.5	V	3.0	40.3	1.0	-52.8	-13.0	-39.8																																																																																																																																																																																																																						
5.2629	5.4	V	3.0	40.9	1.0	-34.5	-13.0	-21.5																																																																																																																																																																																																																						
7.0172	-4.5	V	3.0	41.0	1.0	-44.5	-13.0	-31.5																																																																																																																																																																																																																						
3.5086	-12.0	H	3.0	40.3	1.0	-51.3	-13.0	-38.3																																																																																																																																																																																																																						
5.2629	2.4	H	3.0	40.9	1.0	-37.5	-13.0	-24.5																																																																																																																																																																																																																						
7.0172	-3.9	H	3.0	41.0	1.0	-43.9	-13.0	-30.9																																																																																																																																																																																																																						
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																													
LTE Band 4 1.4MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 4, 1.4MHz BW, 16QAM																																																																																																																																																																																																																													
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier</div> <div style="border: 1px solid black; padding: 2px;">Filter</div> <div style="border: 1px solid black; padding: 2px;">Limit</div> </div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter 1</div> <div style="border: 1px solid black; padding: 2px;">FCC Part 27</div> </div>																																																																																																																																																																																																																													
		<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr><td colspan="10">Low Channel (1710.7MHz)</td></tr> <tr><td>3.4214</td><td>-8.6</td><td>V</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-47.8</td><td>-13.0</td><td>-34.8</td><td></td></tr> <tr><td>5.1321</td><td>3.2</td><td>V</td><td>3.0</td><td>40.9</td><td>1.0</td><td>-36.7</td><td>-13.0</td><td>-23.7</td><td></td></tr> <tr><td>6.8428</td><td>-1.8</td><td>V</td><td>3.0</td><td>41.0</td><td>1.0</td><td>-41.8</td><td>-13.0</td><td>-28.8</td><td></td></tr> <tr><td>3.4214</td><td>-12.9</td><td>H</td><td>3.0</td><td>40.2</td><td>1.0</td><td>-52.1</td><td>-13.0</td><td>-39.1</td><td></td></tr> <tr><td>5.1321</td><td>-0.9</td><td>H</td><td>3.0</td><td>40.9</td><td>1.0</td><td>-40.8</td><td>-13.0</td><td>-27.8</td><td></td></tr> <tr><td>6.8428</td><td>-3.5</td><td>H</td><td>3.0</td><td>41.0</td><td>1.0</td><td>-43.5</td><td>-13.0</td><td>-30.5</td><td></td></tr> <tr><td colspan="10">Mid Channel (1732.5MHz)</td></tr> <tr><td>3.4650</td><td>-18.0</td><td>V</td><td>3.0</td><td>40.3</td><td>1.0</td><td>-57.2</td><td>-13.0</td><td>-44.2</td><td></td></tr> <tr><td>5.1975</td><td>3.6</td><td>V</td><td>3.0</td><td>40.9</td><td>1.0</td><td>-36.3</td><td>-13.0</td><td>-23.3</td><td></td></tr> <tr><td>6.9300</td><td>-1.2</td><td>V</td><td>3.0</td><td>41.0</td><td>1.0</td><td>-41.2</td><td>-13.0</td><td>-28.2</td><td></td></tr> <tr><td>3.4650</td><td>-13.7</td><td>H</td><td>3.0</td><td>40.3</td><td>1.0</td><td>-53.0</td><td>-13.0</td><td>-40.0</td><td></td></tr> <tr><td>5.1975</td><td>1.1</td><td>H</td><td>3.0</td><td>40.9</td><td>1.0</td><td>-38.8</td><td>-13.0</td><td>-25.8</td><td></td></tr> <tr><td>6.9300</td><td>0.0</td><td>H</td><td>3.0</td><td>41.0</td><td>1.0</td><td>-40.0</td><td>-13.0</td><td>-27.0</td><td></td></tr> <tr><td colspan="10">High Channel (1754.3MHz)</td></tr> <tr><td>3.5086</td><td>-13.6</td><td>V</td><td>3.0</td><td>40.3</td><td>1.0</td><td>-52.9</td><td>-13.0</td><td>-39.9</td><td></td></tr> <tr><td>5.2629</td><td>5.7</td><td>V</td><td>3.0</td><td>40.9</td><td>1.0</td><td>-34.2</td><td>-13.0</td><td>-21.2</td><td></td></tr> <tr><td>7.0172</td><td>-4.6</td><td>V</td><td>3.0</td><td>41.0</td><td>1.0</td><td>-44.6</td><td>-13.0</td><td>-31.6</td><td></td></tr> <tr><td>3.5086</td><td>-12.1</td><td>H</td><td>3.0</td><td>40.3</td><td>1.0</td><td>-51.4</td><td>-13.0</td><td>-38.4</td><td></td></tr> <tr><td>5.2629</td><td>2.1</td><td>H</td><td>3.0</td><td>40.9</td><td>1.0</td><td>-37.8</td><td>-13.0</td><td>-24.8</td><td></td></tr> <tr><td>7.0172</td><td>-4.0</td><td>H</td><td>3.0</td><td>41.0</td><td>1.0</td><td>-44.0</td><td>-13.0</td><td>-31.0</td><td></td></tr> </tbody> </table>	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Channel (1710.7MHz)										3.4214	-8.6	V	3.0	40.2	1.0	-47.8	-13.0	-34.8		5.1321	3.2	V	3.0	40.9	1.0	-36.7	-13.0	-23.7		6.8428	-1.8	V	3.0	41.0	1.0	-41.8	-13.0	-28.8		3.4214	-12.9	H	3.0	40.2	1.0	-52.1	-13.0	-39.1		5.1321	-0.9	H	3.0	40.9	1.0	-40.8	-13.0	-27.8		6.8428	-3.5	H	3.0	41.0	1.0	-43.5	-13.0	-30.5		Mid Channel (1732.5MHz)										3.4650	-18.0	V	3.0	40.3	1.0	-57.2	-13.0	-44.2		5.1975	3.6	V	3.0	40.9	1.0	-36.3	-13.0	-23.3		6.9300	-1.2	V	3.0	41.0	1.0	-41.2	-13.0	-28.2		3.4650	-13.7	H	3.0	40.3	1.0	-53.0	-13.0	-40.0		5.1975	1.1	H	3.0	40.9	1.0	-38.8	-13.0	-25.8		6.9300	0.0	H	3.0	41.0	1.0	-40.0	-13.0	-27.0		High Channel (1754.3MHz)										3.5086	-13.6	V	3.0	40.3	1.0	-52.9	-13.0	-39.9		5.2629	5.7	V	3.0	40.9	1.0	-34.2	-13.0	-21.2		7.0172	-4.6	V	3.0	41.0	1.0	-44.6	-13.0	-31.6		3.5086	-12.1	H	3.0	40.3	1.0	-51.4	-13.0	-38.4		5.2629	2.1	H	3.0	40.9	1.0	-37.8	-13.0	-24.8		7.0172	-4.0	H	3.0	41.0	1.0	-44.0	-13.0	-31.0	
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																				
	Low Channel (1710.7MHz)																																																																																																																																																																																																																													
	3.4214	-8.6	V	3.0	40.2	1.0	-47.8	-13.0	-34.8																																																																																																																																																																																																																					
	5.1321	3.2	V	3.0	40.9	1.0	-36.7	-13.0	-23.7																																																																																																																																																																																																																					
	6.8428	-1.8	V	3.0	41.0	1.0	-41.8	-13.0	-28.8																																																																																																																																																																																																																					
	3.4214	-12.9	H	3.0	40.2	1.0	-52.1	-13.0	-39.1																																																																																																																																																																																																																					
	5.1321	-0.9	H	3.0	40.9	1.0	-40.8	-13.0	-27.8																																																																																																																																																																																																																					
	6.8428	-3.5	H	3.0	41.0	1.0	-43.5	-13.0	-30.5																																																																																																																																																																																																																					
	Mid Channel (1732.5MHz)																																																																																																																																																																																																																													
	3.4650	-18.0	V	3.0	40.3	1.0	-57.2	-13.0	-44.2																																																																																																																																																																																																																					
	5.1975	3.6	V	3.0	40.9	1.0	-36.3	-13.0	-23.3																																																																																																																																																																																																																					
	6.9300	-1.2	V	3.0	41.0	1.0	-41.2	-13.0	-28.2																																																																																																																																																																																																																					
3.4650	-13.7	H	3.0	40.3	1.0	-53.0	-13.0	-40.0																																																																																																																																																																																																																						
5.1975	1.1	H	3.0	40.9	1.0	-38.8	-13.0	-25.8																																																																																																																																																																																																																						
6.9300	0.0	H	3.0	41.0	1.0	-40.0	-13.0	-27.0																																																																																																																																																																																																																						
High Channel (1754.3MHz)																																																																																																																																																																																																																														
3.5086	-13.6	V	3.0	40.3	1.0	-52.9	-13.0	-39.9																																																																																																																																																																																																																						
5.2629	5.7	V	3.0	40.9	1.0	-34.2	-13.0	-21.2																																																																																																																																																																																																																						
7.0172	-4.6	V	3.0	41.0	1.0	-44.6	-13.0	-31.6																																																																																																																																																																																																																						
3.5086	-12.1	H	3.0	40.3	1.0	-51.4	-13.0	-38.4																																																																																																																																																																																																																						
5.2629	2.1	H	3.0	40.9	1.0	-37.8	-13.0	-24.8																																																																																																																																																																																																																						
7.0172	-4.0	H	3.0	41.0	1.0	-44.0	-13.0	-31.0																																																																																																																																																																																																																						
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																													

LTE Band 2

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
LTE Band 2 20MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-01-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 2, 20MHz BW, QPSK										
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter Filter 1</div> <div style="border: 1px solid black; padding: 2px;">Limit FCC Part 24</div> </div>										
		f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
		Low Channel (1860MHz)									
		3.7200	-7.0	V	3.0	40.5	1.0	-46.5	-13.0	-33.5	
		5.5800	6.0	V	3.0	40.8	1.0	-33.8	-13.0	-20.8	
		7.4400	-15.6	V	3.0	40.8	1.0	-55.4	-13.0	-42.4	
		3.7200	-7.8	H	3.0	40.5	1.0	-47.3	-13.0	-34.3	
		5.5800	4.0	H	3.0	40.8	1.0	-35.8	-13.0	-22.8	
		7.4400	-14.9	H	3.0	40.8	1.0	-54.6	-13.0	-41.6	
		Mid Channel (1880MHz)									
		3.7600	-5.3	V	3.0	40.5	1.0	-44.8	-13.0	-31.8	
		5.6400	14.0	V	3.0	40.8	1.0	-25.8	-13.0	-12.8	
		7.5200	-13.2	V	3.0	40.7	1.0	-52.9	-13.0	-39.9	
		3.7600	-4.8	H	3.0	40.5	1.0	-44.4	-13.0	-31.4	
	5.6400	9.8	H	3.0	40.8	1.0	-30.0	-13.0	-17.0		
	7.5200	-13.1	H	3.0	40.7	1.0	-52.8	-13.0	-39.8		
	High Channel (1900MHz)										
	3.8000	-15.1	V	3.0	40.6	1.0	-54.7	-13.0	-41.7		
	5.7000	13.7	V	3.0	40.8	1.0	-26.1	-13.0	-13.1		
	7.6000	-12.9	V	3.0	40.7	1.0	-52.5	-13.0	-39.5		
	3.8000	-10.4	H	3.0	40.6	1.0	-49.9	-13.0	-36.9		
	5.7000	8.3	H	3.0	40.8	1.0	-31.5	-13.0	-18.5		
	7.6000	-14.2	H	3.0	40.7	1.0	-53.8	-13.0	-40.8		
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										
LTE Band 2 20MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 02-01-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 2, 20MHz BW, 16QAM										
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter Filter 1</div> <div style="border: 1px solid black; padding: 2px;">Limit FCC Part 24</div> </div>										
		f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
		Low Channel (1860MHz)									
		3.7200	-7.9	V	3.0	40.5	1.0	-47.4	-13.0	-34.4	
		5.5800	4.6	V	3.0	40.8	1.0	-35.2	-13.0	-22.2	
		7.4400	-15.7	V	3.0	40.8	1.0	-55.5	-13.0	-42.5	
		3.7200	-7.4	H	3.0	40.5	1.0	-46.9	-13.0	-33.9	
		5.5800	3.0	H	3.0	40.8	1.0	-36.8	-13.0	-23.8	
		7.4400	-15.0	H	3.0	40.8	1.0	-54.8	-13.0	-41.8	
		Mid Channel (1880MHz)									
		3.7600	-5.7	V	3.0	40.5	1.0	-45.2	-13.0	-32.2	
		5.6400	12.4	V	3.0	40.8	1.0	-27.4	-13.0	-14.4	
		7.5200	-13.6	V	3.0	40.7	1.0	-53.3	-13.0	-40.3	
		3.7600	-5.3	H	3.0	40.5	1.0	-44.9	-13.0	-31.9	
	5.6400	8.0	H	3.0	40.8	1.0	-31.8	-13.0	-18.8		
	7.5200	-13.5	H	3.0	40.7	1.0	-53.2	-13.0	-40.2		
	High Channel (1900MHz)										
	3.8000	-16.3	V	3.0	40.6	1.0	-55.9	-13.0	-42.9		
	5.7000	11.8	V	3.0	40.8	1.0	-28.0	-13.0	-15.0		
	7.6000	-13.4	V	3.0	40.7	1.0	-53.0	-13.0	-40.0		
	3.8000	-12.5	H	3.0	40.6	1.0	-52.0	-13.0	-39.0		
	5.7000	6.6	H	3.0	40.8	1.0	-33.2	-13.0	-20.2		
	7.6000	-14.5	H	3.0	40.7	1.0	-54.2	-13.0	-41.2		
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

LTE Band 2 15MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 2, 15MHz BW, QPSK																																																																																																																																																																																																																												
	Chamber: Chamber 2 Pre-amplifier: AFS42 Filter: Filter 1 Limit: FCC Part 24																																																																																																																																																																																																																												
	<table border="1"> <thead> <tr> <th>f GHz</th> <th>SGreading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Channel (1857.5MHz)</td> </tr> <tr> <td>3.7150</td> <td>-9.3</td> <td>V</td> <td>3.0</td> <td>40.5</td> <td>1.0</td> <td>-48.8</td> <td>-13.0</td> <td>-35.8</td> <td></td> </tr> <tr> <td>5.5725</td> <td>10.2</td> <td>V</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-29.6</td> <td>-13.0</td> <td>-16.6</td> <td></td> </tr> <tr> <td>7.4300</td> <td>-9.0</td> <td>V</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-48.8</td> <td>-13.0</td> <td>-35.8</td> <td></td> </tr> <tr> <td>3.7150</td> <td>-1.1</td> <td>H</td> <td>3.0</td> <td>40.5</td> <td>1.0</td> <td>-40.6</td> <td>-13.0</td> <td>-27.6</td> <td></td> </tr> <tr> <td>5.5725</td> <td>7.9</td> <td>H</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-31.9</td> <td>-13.0</td> <td>-18.9</td> <td></td> </tr> <tr> <td>7.4300</td> <td>-13.2</td> <td>H</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-53.0</td> <td>-13.0</td> <td>-40.0</td> <td></td> </tr> <tr> <td colspan="10">Mid Channel (1880MHz)</td> </tr> <tr> <td>3.7600</td> <td>-4.0</td> <td>V</td> <td>3.0</td> <td>40.5</td> <td>1.0</td> <td>-43.5</td> <td>-13.0</td> <td>-30.5</td> <td></td> </tr> <tr> <td>5.6400</td> <td>14.8</td> <td>V</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-25.0</td> <td>-13.0</td> <td>-12.0</td> <td></td> </tr> <tr> <td>7.5200</td> <td>-3.6</td> <td>V</td> <td>3.0</td> <td>40.7</td> <td>1.0</td> <td>-43.3</td> <td>-13.0</td> <td>-30.3</td> <td></td> </tr> <tr> <td>3.7600</td> <td>1.5</td> <td>H</td> <td>3.0</td> <td>40.5</td> <td>1.0</td> <td>-38.0</td> <td>-13.0</td> <td>-25.0</td> <td></td> </tr> <tr> <td>5.6400</td> <td>17.4</td> <td>H</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-22.4</td> <td>-13.0</td> <td>-9.4</td> <td></td> </tr> <tr> <td>7.5200</td> <td>-8.6</td> <td>H</td> <td>3.0</td> <td>40.7</td> <td>1.0</td> <td>-48.3</td> <td>-13.0</td> <td>-35.3</td> <td></td> </tr> <tr> <td colspan="10">High Channel (1902.5MHz)</td> </tr> <tr> <td>3.8050</td> <td>-8.3</td> <td>V</td> <td>3.0</td> <td>40.6</td> <td>1.0</td> <td>-47.8</td> <td>-13.0</td> <td>-34.8</td> <td></td> </tr> <tr> <td>5.7075</td> <td>14.1</td> <td>V</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-25.7</td> <td>-13.0</td> <td>-12.7</td> <td></td> </tr> <tr> <td>7.6100</td> <td>-8.1</td> <td>V</td> <td>3.0</td> <td>40.7</td> <td>1.0</td> <td>-47.8</td> <td>-13.0</td> <td>-34.8</td> <td></td> </tr> <tr> <td>3.8050</td> <td>-3.8</td> <td>H</td> <td>3.0</td> <td>40.6</td> <td>1.0</td> <td>-43.4</td> <td>-13.0</td> <td>-30.4</td> <td></td> </tr> <tr> <td>5.7075</td> <td>10.5</td> <td>H</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-29.3</td> <td>-13.0</td> <td>-16.3</td> <td></td> </tr> <tr> <td>7.6100</td> <td>-11.9</td> <td>H</td> <td>3.0</td> <td>40.7</td> <td>1.0</td> <td>-51.6</td> <td>-13.0</td> <td>-38.6</td> <td></td> </tr> </tbody> </table> <p>Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.</p>	f GHz	SGreading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Channel (1857.5MHz)										3.7150	-9.3	V	3.0	40.5	1.0	-48.8	-13.0	-35.8		5.5725	10.2	V	3.0	40.8	1.0	-29.6	-13.0	-16.6		7.4300	-9.0	V	3.0	40.8	1.0	-48.8	-13.0	-35.8		3.7150	-1.1	H	3.0	40.5	1.0	-40.6	-13.0	-27.6		5.5725	7.9	H	3.0	40.8	1.0	-31.9	-13.0	-18.9		7.4300	-13.2	H	3.0	40.8	1.0	-53.0	-13.0	-40.0		Mid Channel (1880MHz)										3.7600	-4.0	V	3.0	40.5	1.0	-43.5	-13.0	-30.5		5.6400	14.8	V	3.0	40.8	1.0	-25.0	-13.0	-12.0		7.5200	-3.6	V	3.0	40.7	1.0	-43.3	-13.0	-30.3		3.7600	1.5	H	3.0	40.5	1.0	-38.0	-13.0	-25.0		5.6400	17.4	H	3.0	40.8	1.0	-22.4	-13.0	-9.4		7.5200	-8.6	H	3.0	40.7	1.0	-48.3	-13.0	-35.3		High Channel (1902.5MHz)										3.8050	-8.3	V	3.0	40.6	1.0	-47.8	-13.0	-34.8		5.7075	14.1	V	3.0	40.8	1.0	-25.7	-13.0	-12.7		7.6100	-8.1	V	3.0	40.7	1.0	-47.8	-13.0	-34.8		3.8050	-3.8	H	3.0	40.6	1.0	-43.4	-13.0	-30.4		5.7075	10.5	H	3.0	40.8	1.0	-29.3	-13.0	-16.3		7.6100	-11.9	H	3.0	40.7	1.0	-51.6	-13.0	-38.6	
f GHz	SGreading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																				
Low Channel (1857.5MHz)																																																																																																																																																																																																																													
3.7150	-9.3	V	3.0	40.5	1.0	-48.8	-13.0	-35.8																																																																																																																																																																																																																					
5.5725	10.2	V	3.0	40.8	1.0	-29.6	-13.0	-16.6																																																																																																																																																																																																																					
7.4300	-9.0	V	3.0	40.8	1.0	-48.8	-13.0	-35.8																																																																																																																																																																																																																					
3.7150	-1.1	H	3.0	40.5	1.0	-40.6	-13.0	-27.6																																																																																																																																																																																																																					
5.5725	7.9	H	3.0	40.8	1.0	-31.9	-13.0	-18.9																																																																																																																																																																																																																					
7.4300	-13.2	H	3.0	40.8	1.0	-53.0	-13.0	-40.0																																																																																																																																																																																																																					
Mid Channel (1880MHz)																																																																																																																																																																																																																													
3.7600	-4.0	V	3.0	40.5	1.0	-43.5	-13.0	-30.5																																																																																																																																																																																																																					
5.6400	14.8	V	3.0	40.8	1.0	-25.0	-13.0	-12.0																																																																																																																																																																																																																					
7.5200	-3.6	V	3.0	40.7	1.0	-43.3	-13.0	-30.3																																																																																																																																																																																																																					
3.7600	1.5	H	3.0	40.5	1.0	-38.0	-13.0	-25.0																																																																																																																																																																																																																					
5.6400	17.4	H	3.0	40.8	1.0	-22.4	-13.0	-9.4																																																																																																																																																																																																																					
7.5200	-8.6	H	3.0	40.7	1.0	-48.3	-13.0	-35.3																																																																																																																																																																																																																					
High Channel (1902.5MHz)																																																																																																																																																																																																																													
3.8050	-8.3	V	3.0	40.6	1.0	-47.8	-13.0	-34.8																																																																																																																																																																																																																					
5.7075	14.1	V	3.0	40.8	1.0	-25.7	-13.0	-12.7																																																																																																																																																																																																																					
7.6100	-8.1	V	3.0	40.7	1.0	-47.8	-13.0	-34.8																																																																																																																																																																																																																					
3.8050	-3.8	H	3.0	40.6	1.0	-43.4	-13.0	-30.4																																																																																																																																																																																																																					
5.7075	10.5	H	3.0	40.8	1.0	-29.3	-13.0	-16.3																																																																																																																																																																																																																					
7.6100	-11.9	H	3.0	40.7	1.0	-51.6	-13.0	-38.6																																																																																																																																																																																																																					
LTE Band 2 15MHz 16QAM	UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 2, 15MHz BW, 16QAM																																																																																																																																																																																																																												
	Chamber: Chamber 2 Pre-amplifier: AFS42 Filter: Filter 1 Limit: FCC Part 24																																																																																																																																																																																																																												
	<table border="1"> <thead> <tr> <th>f GHz</th> <th>SGreading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Channel (1857.5MHz)</td> </tr> <tr> <td>3.7150</td> <td>-10.0</td> <td>V</td> <td>3.0</td> <td>40.5</td> <td>1.0</td> <td>-49.5</td> <td>-13.0</td> <td>-36.5</td> <td></td> </tr> <tr> <td>5.5725</td> <td>8.7</td> <td>V</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-31.1</td> <td>-13.0</td> <td>-18.1</td> <td></td> </tr> <tr> <td>7.4300</td> <td>-9.8</td> <td>V</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-49.6</td> <td>-13.0</td> <td>-36.6</td> <td></td> </tr> <tr> <td>3.7150</td> <td>-1.9</td> <td>H</td> <td>3.0</td> <td>40.5</td> <td>1.0</td> <td>-41.4</td> <td>-13.0</td> <td>-28.4</td> <td></td> </tr> <tr> <td>5.5725</td> <td>8.2</td> <td>H</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-31.6</td> <td>-13.0</td> <td>-18.6</td> <td></td> </tr> <tr> <td>7.4300</td> <td>-13.5</td> <td>H</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-53.3</td> <td>-13.0</td> <td>-40.3</td> <td></td> </tr> <tr> <td colspan="10">Mid Channel (1880MHz)</td> </tr> <tr> <td>3.7600</td> <td>-4.5</td> <td>V</td> <td>3.0</td> <td>40.5</td> <td>1.0</td> <td>-44.0</td> <td>-13.0</td> <td>-31.0</td> <td></td> </tr> <tr> <td>5.6400</td> <td>15.9</td> <td>V</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-23.9</td> <td>-13.0</td> <td>-10.9</td> <td></td> </tr> <tr> <td>7.5200</td> <td>-4.8</td> <td>V</td> <td>3.0</td> <td>40.7</td> <td>1.0</td> <td>-44.5</td> <td>-13.0</td> <td>-31.5</td> <td></td> </tr> <tr> <td>3.7600</td> <td>0.9</td> <td>H</td> <td>3.0</td> <td>40.5</td> <td>1.0</td> <td>-38.7</td> <td>-13.0</td> <td>-25.7</td> <td></td> </tr> <tr> <td>5.6400</td> <td>16.7</td> <td>H</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-23.1</td> <td>-13.0</td> <td>-10.1</td> <td></td> </tr> <tr> <td>7.5200</td> <td>-12.1</td> <td>H</td> <td>3.0</td> <td>40.7</td> <td>1.0</td> <td>-51.8</td> <td>-13.0</td> <td>-38.8</td> <td></td> </tr> <tr> <td colspan="10">High Channel (1902.5MHz)</td> </tr> <tr> <td>3.8050</td> <td>-9.0</td> <td>V</td> <td>3.0</td> <td>40.6</td> <td>1.0</td> <td>-48.6</td> <td>-13.0</td> <td>-35.6</td> <td></td> </tr> <tr> <td>5.7075</td> <td>13.3</td> <td>V</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-26.5</td> <td>-13.0</td> <td>-13.5</td> <td></td> </tr> <tr> <td>7.6100</td> <td>-8.3</td> <td>V</td> <td>3.0</td> <td>40.7</td> <td>1.0</td> <td>-48.0</td> <td>-13.0</td> <td>-35.0</td> <td></td> </tr> <tr> <td>3.8050</td> <td>-4.7</td> <td>H</td> <td>3.0</td> <td>40.6</td> <td>1.0</td> <td>-44.3</td> <td>-13.0</td> <td>-31.3</td> <td></td> </tr> <tr> <td>5.7075</td> <td>8.9</td> <td>H</td> <td>3.0</td> <td>40.8</td> <td>1.0</td> <td>-30.9</td> <td>-13.0</td> <td>-17.9</td> <td></td> </tr> <tr> <td>7.6100</td> <td>-12.4</td> <td>H</td> <td>3.0</td> <td>40.7</td> <td>1.0</td> <td>-52.1</td> <td>-13.0</td> <td>-39.1</td> <td></td> </tr> </tbody> </table> <p>Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.</p>	f GHz	SGreading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Channel (1857.5MHz)										3.7150	-10.0	V	3.0	40.5	1.0	-49.5	-13.0	-36.5		5.5725	8.7	V	3.0	40.8	1.0	-31.1	-13.0	-18.1		7.4300	-9.8	V	3.0	40.8	1.0	-49.6	-13.0	-36.6		3.7150	-1.9	H	3.0	40.5	1.0	-41.4	-13.0	-28.4		5.5725	8.2	H	3.0	40.8	1.0	-31.6	-13.0	-18.6		7.4300	-13.5	H	3.0	40.8	1.0	-53.3	-13.0	-40.3		Mid Channel (1880MHz)										3.7600	-4.5	V	3.0	40.5	1.0	-44.0	-13.0	-31.0		5.6400	15.9	V	3.0	40.8	1.0	-23.9	-13.0	-10.9		7.5200	-4.8	V	3.0	40.7	1.0	-44.5	-13.0	-31.5		3.7600	0.9	H	3.0	40.5	1.0	-38.7	-13.0	-25.7		5.6400	16.7	H	3.0	40.8	1.0	-23.1	-13.0	-10.1		7.5200	-12.1	H	3.0	40.7	1.0	-51.8	-13.0	-38.8		High Channel (1902.5MHz)										3.8050	-9.0	V	3.0	40.6	1.0	-48.6	-13.0	-35.6		5.7075	13.3	V	3.0	40.8	1.0	-26.5	-13.0	-13.5		7.6100	-8.3	V	3.0	40.7	1.0	-48.0	-13.0	-35.0		3.8050	-4.7	H	3.0	40.6	1.0	-44.3	-13.0	-31.3		5.7075	8.9	H	3.0	40.8	1.0	-30.9	-13.0	-17.9		7.6100	-12.4	H	3.0	40.7	1.0	-52.1	-13.0	-39.1	
f GHz	SGreading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																				
Low Channel (1857.5MHz)																																																																																																																																																																																																																													
3.7150	-10.0	V	3.0	40.5	1.0	-49.5	-13.0	-36.5																																																																																																																																																																																																																					
5.5725	8.7	V	3.0	40.8	1.0	-31.1	-13.0	-18.1																																																																																																																																																																																																																					
7.4300	-9.8	V	3.0	40.8	1.0	-49.6	-13.0	-36.6																																																																																																																																																																																																																					
3.7150	-1.9	H	3.0	40.5	1.0	-41.4	-13.0	-28.4																																																																																																																																																																																																																					
5.5725	8.2	H	3.0	40.8	1.0	-31.6	-13.0	-18.6																																																																																																																																																																																																																					
7.4300	-13.5	H	3.0	40.8	1.0	-53.3	-13.0	-40.3																																																																																																																																																																																																																					
Mid Channel (1880MHz)																																																																																																																																																																																																																													
3.7600	-4.5	V	3.0	40.5	1.0	-44.0	-13.0	-31.0																																																																																																																																																																																																																					
5.6400	15.9	V	3.0	40.8	1.0	-23.9	-13.0	-10.9																																																																																																																																																																																																																					
7.5200	-4.8	V	3.0	40.7	1.0	-44.5	-13.0	-31.5																																																																																																																																																																																																																					
3.7600	0.9	H	3.0	40.5	1.0	-38.7	-13.0	-25.7																																																																																																																																																																																																																					
5.6400	16.7	H	3.0	40.8	1.0	-23.1	-13.0	-10.1																																																																																																																																																																																																																					
7.5200	-12.1	H	3.0	40.7	1.0	-51.8	-13.0	-38.8																																																																																																																																																																																																																					
High Channel (1902.5MHz)																																																																																																																																																																																																																													
3.8050	-9.0	V	3.0	40.6	1.0	-48.6	-13.0	-35.6																																																																																																																																																																																																																					
5.7075	13.3	V	3.0	40.8	1.0	-26.5	-13.0	-13.5																																																																																																																																																																																																																					
7.6100	-8.3	V	3.0	40.7	1.0	-48.0	-13.0	-35.0																																																																																																																																																																																																																					
3.8050	-4.7	H	3.0	40.6	1.0	-44.3	-13.0	-31.3																																																																																																																																																																																																																					
5.7075	8.9	H	3.0	40.8	1.0	-30.9	-13.0	-17.9																																																																																																																																																																																																																					
7.6100	-12.4	H	3.0	40.7	1.0	-52.1	-13.0	-39.1																																																																																																																																																																																																																					

		Above 1GHz High Frequency Substitution Measurement										
LTE Band 2 10MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 2, 10MHz BW, QPSK		Chamber Chamber 2		Pre-amplifier AFS42		Filter Filter 1		Limit FCC Part 24			
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes		
	Low Channel (1855MHz)											
	3.7100	-6.7	V	3.0	40.5	1.0	-46.2	-13.0	-33.2			
	5.5650	9.9	V	3.0	40.8	1.0	-29.9	-13.0	-16.9			
	7.4200	-10.3	V	3.0	40.8	1.0	-50.1	-13.0	-37.1			
	3.7100	-1.1	H	3.0	40.5	1.0	-40.6	-13.0	-27.6			
	5.5650	4.9	H	3.0	40.8	1.0	-35.0	-13.0	-22.0			
	7.4200	-12.5	H	3.0	40.8	1.0	-52.3	-13.0	-39.3			
	Mid Channel (1880MHz)											
	3.7600	-5.2	V	3.0	40.5	1.0	-44.7	-13.0	-31.7			
	5.6400	14.4	V	3.0	40.8	1.0	-25.4	-13.0	-12.4			
	7.5200	-10.5	V	3.0	40.7	1.0	-50.2	-13.0	-37.2			
	3.7600	-0.1	H	3.0	40.5	1.0	-39.6	-13.0	-26.6			
	5.6400	8.0	H	3.0	40.8	1.0	-31.8	-13.0	-18.8			
7.5200	-11.3	H	3.0	40.7	1.0	-51.0	-13.0	-38.0				
High Channel (1905MHz)												
3.8100	-7.9	V	3.0	40.6	1.0	-47.5	-13.0	-34.5				
5.7150	13.6	V	3.0	40.8	1.0	-26.2	-13.0	-13.2				
7.6200	-10.5	V	3.0	40.7	1.0	-50.2	-13.0	-37.2				
3.8100	-4.1	H	3.0	40.6	1.0	-43.7	-13.0	-30.7				
5.7150	7.2	H	3.0	40.8	1.0	-32.6	-13.0	-19.6				
7.6200	-12.9	H	3.0	40.7	1.0	-52.6	-13.0	-39.6				
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.												
LTE Band 2 10MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 2, 10MHz BW, 16QAM		Chamber Chamber 2		Pre-amplifier AFS42		Filter Filter 1		Limit FCC Part 24			
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes		
	Low Channel (1855MHz)											
	3.7100	-7.9	V	3.0	40.5	1.0	-47.4	-13.0	-34.4			
	5.5650	8.7	V	3.0	40.8	1.0	-31.1	-13.0	-18.1			
	7.4200	-11.0	V	3.0	40.8	1.0	-50.8	-13.0	-37.8			
	3.7100	-2.0	H	3.0	40.5	1.0	-41.5	-13.0	-28.5			
	5.5650	3.9	H	3.0	40.8	1.0	-36.0	-13.0	-23.0			
	7.4200	-13.1	H	3.0	40.8	1.0	-52.9	-13.0	-39.9			
	Mid Channel (1880MHz)											
	3.7600	-5.6	V	3.0	40.5	1.0	-45.2	-13.0	-32.2			
	5.6400	13.5	V	3.0	40.8	1.0	-26.3	-13.0	-13.3			
	7.5200	-11.0	V	3.0	40.7	1.0	-50.7	-13.0	-37.7			
	3.7600	-0.7	H	3.0	40.5	1.0	-40.2	-13.0	-27.2			
	5.6400	7.3	H	3.0	40.8	1.0	-32.5	-13.0	-19.5			
7.5200	-11.5	H	3.0	40.7	1.0	-51.2	-13.0	-38.2				
High Channel (1905MHz)												
3.8100	-8.2	V	3.0	40.6	1.0	-47.8	-13.0	-34.8				
5.7150	12.3	V	3.0	40.8	1.0	-27.5	-13.0	-14.5				
7.6200	-10.9	V	3.0	40.7	1.0	-50.5	-13.0	-37.5				
3.8100	-4.7	H	3.0	40.6	1.0	-44.3	-13.0	-31.3				
5.7150	6.4	H	3.0	40.8	1.0	-33.4	-13.0	-20.4				
7.6200	-13.1	H	3.0	40.7	1.0	-52.8	-13.0	-39.8				
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.												

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement										
LTE Band 2 5MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 2, 5MHz BW, QPSK		Chamber Chamber 2		Pre-amplifier AFS42		Filter Filter 1		Limit FCC Part 24			
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes		
	Low Channel (1852.5MHz)											
	3.7050	-7.4	V	3.0	40.5	1.0	-46.9	-13.0	-33.9			
	5.5575	9.1	V	3.0	40.8	1.0	-30.8	-13.0	-17.8			
	7.4100	-11.4	V	3.0	40.8	1.0	-51.2	-13.0	-38.2			
	3.7050	-1.6	H	3.0	40.5	1.0	-41.0	-13.0	-28.0			
	5.5575	6.0	H	3.0	40.8	1.0	-33.8	-13.0	-20.8			
	7.4100	-12.0	H	3.0	40.8	1.0	-51.8	-13.0	-38.8			
	Mid Channel (1880MHz)											
	3.7600	-5.9	V	3.0	40.5	1.0	-45.4	-13.0	-32.4			
	5.6400	14.1	V	3.0	40.8	1.0	-25.7	-13.0	-12.7			
	7.5200	-11.0	V	3.0	40.7	1.0	-50.7	-13.0	-37.7			
	3.7600	-0.4	H	3.0	40.5	1.0	-39.9	-13.0	-26.9			
	5.6400	5.5	H	3.0	40.8	1.0	-34.3	-13.0	-21.3			
7.5200	-11.7	H	3.0	40.7	1.0	-51.4	-13.0	-38.4				
High Channel (1907.5MHz)												
3.8150	-4.1	V	3.0	40.6	1.0	-43.6	-13.0	-30.6				
5.7225	15.1	V	3.0	40.8	1.0	-24.7	-13.0	-11.7				
7.6300	-11.6	V	3.0	40.7	1.0	-51.3	-13.0	-38.3				
3.8150	0.1	H	3.0	40.6	1.0	-39.5	-13.0	-26.5				
5.7225	13.9	H	3.0	40.8	1.0	-25.9	-13.0	-12.9				
7.6300	-13.5	H	3.0	40.7	1.0	-53.1	-13.0	-40.1				
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.												
LTE Band 2 5MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 2, 5MHz BW, 16QAM		Chamber Chamber 2		Pre-amplifier AFS42		Filter Filter 1		Limit FCC Part 24			
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes		
	Low Channel (1852.5MHz)											
	3.7050	-8.4	V	3.0	40.5	1.0	-47.9	-13.0	-34.9			
	5.5575	7.5	V	3.0	40.8	1.0	-32.3	-13.0	-19.3			
	7.4100	-12.1	V	3.0	40.8	1.0	-51.9	-13.0	-38.9			
	3.7050	-2.6	H	3.0	40.5	1.0	-42.1	-13.0	-29.1			
	5.5575	4.4	H	3.0	40.8	1.0	-35.4	-13.0	-22.4			
	7.4100	-12.5	H	3.0	40.8	1.0	-52.3	-13.0	-39.3			
	Mid Channel (1880MHz)											
	3.7600	-6.7	V	3.0	40.5	1.0	-46.2	-13.0	-33.2			
	5.6400	12.1	V	3.0	40.8	1.0	-27.7	-13.0	-14.7			
	7.5200	-11.1	V	3.0	40.7	1.0	-50.9	-13.0	-37.9			
	3.7600	-1.4	H	3.0	40.5	1.0	-40.9	-13.0	-27.9			
	5.6400	3.5	H	3.0	40.8	1.0	-36.3	-13.0	-23.3			
7.5200	-12.1	H	3.0	40.7	1.0	-51.8	-13.0	-38.8				
High Channel (1907.5MHz)												
3.8150	-5.3	V	3.0	40.6	1.0	-44.9	-13.0	-31.9				
5.7225	13.3	V	3.0	40.8	1.0	-26.5	-13.0	-13.5				
7.6300	-11.8	V	3.0	40.7	1.0	-51.5	-13.0	-38.5				
3.8150	-1.2	H	3.0	40.6	1.0	-40.8	-13.0	-27.8				
5.7225	12.1	H	3.0	40.8	1.0	-27.7	-13.0	-14.7				
7.6300	-13.3	H	3.0	40.7	1.0	-53.0	-13.0	-40.0				
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.												

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																												
LTE Band 2 3MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 2, 3MHz BW, QPSK																																																																																																																																																																																																																													
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier</div> <div style="border: 1px solid black; padding: 2px;">Filter</div> <div style="border: 1px solid black; padding: 2px;">Limit</div> </div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter 1</div> <div style="border: 1px solid black; padding: 2px;">FCC Part 24</div> </div>																																																																																																																																																																																																																													
		<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr><td colspan="10">Low Channel (1851.5MHz)</td></tr> <tr><td>3.7030</td><td>-4.4</td><td>V</td><td>3.0</td><td>40.5</td><td>1.0</td><td>-43.9</td><td>-13.0</td><td>-30.9</td><td></td></tr> <tr><td>5.5545</td><td>9.9</td><td>V</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-30.0</td><td>-13.0</td><td>-17.0</td><td></td></tr> <tr><td>7.4060</td><td>-10.1</td><td>V</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-49.9</td><td>-13.0</td><td>-36.9</td><td></td></tr> <tr><td>3.7030</td><td>0.6</td><td>H</td><td>3.0</td><td>40.5</td><td>1.0</td><td>-38.9</td><td>-13.0</td><td>-25.9</td><td></td></tr> <tr><td>5.5545</td><td>4.1</td><td>H</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-35.7</td><td>-13.0</td><td>-22.7</td><td></td></tr> <tr><td>7.4060</td><td>-12.9</td><td>H</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-52.6</td><td>-13.0</td><td>-39.6</td><td></td></tr> <tr><td colspan="10">Mid Channel (1880MHz)</td></tr> <tr><td>3.7600</td><td>-5.8</td><td>V</td><td>3.0</td><td>40.5</td><td>1.0</td><td>-45.3</td><td>-13.0</td><td>-32.3</td><td></td></tr> <tr><td>5.6400</td><td>13.1</td><td>V</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-26.7</td><td>-13.0</td><td>-13.7</td><td></td></tr> <tr><td>7.5200</td><td>-11.2</td><td>V</td><td>3.0</td><td>40.7</td><td>1.0</td><td>-50.9</td><td>-13.0</td><td>-37.9</td><td></td></tr> <tr><td>3.7600</td><td>-1.3</td><td>H</td><td>3.0</td><td>40.5</td><td>1.0</td><td>-40.8</td><td>-13.0</td><td>-27.8</td><td></td></tr> <tr><td>5.6400</td><td>9.3</td><td>H</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-30.5</td><td>-13.0</td><td>-17.5</td><td></td></tr> <tr><td>7.5200</td><td>-11.6</td><td>H</td><td>3.0</td><td>40.7</td><td>1.0</td><td>-51.4</td><td>-13.0</td><td>-38.4</td><td></td></tr> <tr><td colspan="10">High Channel (1908.5MHz)</td></tr> <tr><td>3.8170</td><td>-0.2</td><td>V</td><td>3.0</td><td>40.6</td><td>1.0</td><td>-39.8</td><td>-13.0</td><td>-26.8</td><td></td></tr> <tr><td>5.7255</td><td>14.6</td><td>V</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-25.2</td><td>-13.0</td><td>-12.2</td><td></td></tr> <tr><td>7.6340</td><td>-13.0</td><td>V</td><td>3.0</td><td>40.7</td><td>1.0</td><td>-52.7</td><td>-13.0</td><td>-39.7</td><td></td></tr> <tr><td>3.8170</td><td>1.6</td><td>H</td><td>3.0</td><td>40.6</td><td>1.0</td><td>-38.0</td><td>-13.0</td><td>-25.0</td><td></td></tr> <tr><td>5.7255</td><td>10.6</td><td>H</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-29.2</td><td>-13.0</td><td>-16.2</td><td></td></tr> <tr><td>7.6340</td><td>-13.6</td><td>H</td><td>3.0</td><td>40.7</td><td>1.0</td><td>-53.2</td><td>-13.0</td><td>-40.2</td><td></td></tr> </tbody> </table>	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Channel (1851.5MHz)										3.7030	-4.4	V	3.0	40.5	1.0	-43.9	-13.0	-30.9		5.5545	9.9	V	3.0	40.8	1.0	-30.0	-13.0	-17.0		7.4060	-10.1	V	3.0	40.8	1.0	-49.9	-13.0	-36.9		3.7030	0.6	H	3.0	40.5	1.0	-38.9	-13.0	-25.9		5.5545	4.1	H	3.0	40.8	1.0	-35.7	-13.0	-22.7		7.4060	-12.9	H	3.0	40.8	1.0	-52.6	-13.0	-39.6		Mid Channel (1880MHz)										3.7600	-5.8	V	3.0	40.5	1.0	-45.3	-13.0	-32.3		5.6400	13.1	V	3.0	40.8	1.0	-26.7	-13.0	-13.7		7.5200	-11.2	V	3.0	40.7	1.0	-50.9	-13.0	-37.9		3.7600	-1.3	H	3.0	40.5	1.0	-40.8	-13.0	-27.8		5.6400	9.3	H	3.0	40.8	1.0	-30.5	-13.0	-17.5		7.5200	-11.6	H	3.0	40.7	1.0	-51.4	-13.0	-38.4		High Channel (1908.5MHz)										3.8170	-0.2	V	3.0	40.6	1.0	-39.8	-13.0	-26.8		5.7255	14.6	V	3.0	40.8	1.0	-25.2	-13.0	-12.2		7.6340	-13.0	V	3.0	40.7	1.0	-52.7	-13.0	-39.7		3.8170	1.6	H	3.0	40.6	1.0	-38.0	-13.0	-25.0		5.7255	10.6	H	3.0	40.8	1.0	-29.2	-13.0	-16.2		7.6340	-13.6	H	3.0	40.7	1.0	-53.2	-13.0	-40.2	
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																				
	Low Channel (1851.5MHz)																																																																																																																																																																																																																													
	3.7030	-4.4	V	3.0	40.5	1.0	-43.9	-13.0	-30.9																																																																																																																																																																																																																					
	5.5545	9.9	V	3.0	40.8	1.0	-30.0	-13.0	-17.0																																																																																																																																																																																																																					
	7.4060	-10.1	V	3.0	40.8	1.0	-49.9	-13.0	-36.9																																																																																																																																																																																																																					
	3.7030	0.6	H	3.0	40.5	1.0	-38.9	-13.0	-25.9																																																																																																																																																																																																																					
	5.5545	4.1	H	3.0	40.8	1.0	-35.7	-13.0	-22.7																																																																																																																																																																																																																					
	7.4060	-12.9	H	3.0	40.8	1.0	-52.6	-13.0	-39.6																																																																																																																																																																																																																					
	Mid Channel (1880MHz)																																																																																																																																																																																																																													
	3.7600	-5.8	V	3.0	40.5	1.0	-45.3	-13.0	-32.3																																																																																																																																																																																																																					
	5.6400	13.1	V	3.0	40.8	1.0	-26.7	-13.0	-13.7																																																																																																																																																																																																																					
	7.5200	-11.2	V	3.0	40.7	1.0	-50.9	-13.0	-37.9																																																																																																																																																																																																																					
3.7600	-1.3	H	3.0	40.5	1.0	-40.8	-13.0	-27.8																																																																																																																																																																																																																						
5.6400	9.3	H	3.0	40.8	1.0	-30.5	-13.0	-17.5																																																																																																																																																																																																																						
7.5200	-11.6	H	3.0	40.7	1.0	-51.4	-13.0	-38.4																																																																																																																																																																																																																						
High Channel (1908.5MHz)																																																																																																																																																																																																																														
3.8170	-0.2	V	3.0	40.6	1.0	-39.8	-13.0	-26.8																																																																																																																																																																																																																						
5.7255	14.6	V	3.0	40.8	1.0	-25.2	-13.0	-12.2																																																																																																																																																																																																																						
7.6340	-13.0	V	3.0	40.7	1.0	-52.7	-13.0	-39.7																																																																																																																																																																																																																						
3.8170	1.6	H	3.0	40.6	1.0	-38.0	-13.0	-25.0																																																																																																																																																																																																																						
5.7255	10.6	H	3.0	40.8	1.0	-29.2	-13.0	-16.2																																																																																																																																																																																																																						
7.6340	-13.6	H	3.0	40.7	1.0	-53.2	-13.0	-40.2																																																																																																																																																																																																																						
	Rev. 03.03.09	Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																												
LTE Band 2 3MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 2, 3MHz BW, 16QAM																																																																																																																																																																																																																													
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier</div> <div style="border: 1px solid black; padding: 2px;">Filter</div> <div style="border: 1px solid black; padding: 2px;">Limit</div> </div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> <div style="border: 1px solid black; padding: 2px;">Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter 1</div> <div style="border: 1px solid black; padding: 2px;">FCC Part 24</div> </div>																																																																																																																																																																																																																													
		<table border="1"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr><td colspan="10">Low Channel (1851.5MHz)</td></tr> <tr><td>3.703</td><td>-6.1</td><td>V</td><td>3.0</td><td>40.5</td><td>1.0</td><td>-45.5</td><td>-13.0</td><td>-32.5</td><td></td></tr> <tr><td>5.555</td><td>7.7</td><td>V</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-32.1</td><td>-13.0</td><td>-19.1</td><td></td></tr> <tr><td>7.406</td><td>-11.4</td><td>V</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-51.2</td><td>-13.0</td><td>-38.2</td><td></td></tr> <tr><td>3.703</td><td>-0.8</td><td>H</td><td>3.0</td><td>40.5</td><td>1.0</td><td>-40.3</td><td>-13.0</td><td>-27.3</td><td></td></tr> <tr><td>5.555</td><td>2.0</td><td>H</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-37.8</td><td>-13.0</td><td>-24.8</td><td></td></tr> <tr><td>7.406</td><td>-13.6</td><td>H</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-53.4</td><td>-13.0</td><td>-40.4</td><td></td></tr> <tr><td colspan="10">Mid Channel (1880MHz)</td></tr> <tr><td>3.760</td><td>-6.6</td><td>V</td><td>3.0</td><td>40.5</td><td>1.0</td><td>-46.2</td><td>-13.0</td><td>-33.2</td><td></td></tr> <tr><td>5.640</td><td>11.5</td><td>V</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-28.3</td><td>-13.0</td><td>-15.3</td><td></td></tr> <tr><td>7.520</td><td>-11.4</td><td>V</td><td>3.0</td><td>40.7</td><td>1.0</td><td>-51.2</td><td>-13.0</td><td>-38.2</td><td></td></tr> <tr><td>3.760</td><td>-1.9</td><td>H</td><td>3.0</td><td>40.5</td><td>1.0</td><td>-41.5</td><td>-13.0</td><td>-28.5</td><td></td></tr> <tr><td>5.640</td><td>8.1</td><td>H</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-31.7</td><td>-13.0</td><td>-18.7</td><td></td></tr> <tr><td>7.520</td><td>-12.0</td><td>H</td><td>3.0</td><td>40.7</td><td>1.0</td><td>-51.7</td><td>-13.0</td><td>-38.7</td><td></td></tr> <tr><td colspan="10">High Channel (1908.5MHz)</td></tr> <tr><td>3.817</td><td>-2.3</td><td>V</td><td>3.0</td><td>40.6</td><td>1.0</td><td>-41.9</td><td>-13.0</td><td>-28.9</td><td></td></tr> <tr><td>5.726</td><td>12.1</td><td>V</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-27.7</td><td>-13.0</td><td>-14.7</td><td></td></tr> <tr><td>7.634</td><td>-12.8</td><td>V</td><td>3.0</td><td>40.7</td><td>1.0</td><td>-52.5</td><td>-13.0</td><td>-39.5</td><td></td></tr> <tr><td>3.817</td><td>0.2</td><td>H</td><td>3.0</td><td>40.6</td><td>1.0</td><td>-39.4</td><td>-13.0</td><td>-26.4</td><td></td></tr> <tr><td>5.726</td><td>8.1</td><td>H</td><td>3.0</td><td>40.8</td><td>1.0</td><td>-31.7</td><td>-13.0</td><td>-18.7</td><td></td></tr> <tr><td>7.634</td><td>-14.3</td><td>H</td><td>3.0</td><td>40.7</td><td>1.0</td><td>-54.0</td><td>-13.0</td><td>-41.0</td><td></td></tr> </tbody> </table>	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Channel (1851.5MHz)										3.703	-6.1	V	3.0	40.5	1.0	-45.5	-13.0	-32.5		5.555	7.7	V	3.0	40.8	1.0	-32.1	-13.0	-19.1		7.406	-11.4	V	3.0	40.8	1.0	-51.2	-13.0	-38.2		3.703	-0.8	H	3.0	40.5	1.0	-40.3	-13.0	-27.3		5.555	2.0	H	3.0	40.8	1.0	-37.8	-13.0	-24.8		7.406	-13.6	H	3.0	40.8	1.0	-53.4	-13.0	-40.4		Mid Channel (1880MHz)										3.760	-6.6	V	3.0	40.5	1.0	-46.2	-13.0	-33.2		5.640	11.5	V	3.0	40.8	1.0	-28.3	-13.0	-15.3		7.520	-11.4	V	3.0	40.7	1.0	-51.2	-13.0	-38.2		3.760	-1.9	H	3.0	40.5	1.0	-41.5	-13.0	-28.5		5.640	8.1	H	3.0	40.8	1.0	-31.7	-13.0	-18.7		7.520	-12.0	H	3.0	40.7	1.0	-51.7	-13.0	-38.7		High Channel (1908.5MHz)										3.817	-2.3	V	3.0	40.6	1.0	-41.9	-13.0	-28.9		5.726	12.1	V	3.0	40.8	1.0	-27.7	-13.0	-14.7		7.634	-12.8	V	3.0	40.7	1.0	-52.5	-13.0	-39.5		3.817	0.2	H	3.0	40.6	1.0	-39.4	-13.0	-26.4		5.726	8.1	H	3.0	40.8	1.0	-31.7	-13.0	-18.7		7.634	-14.3	H	3.0	40.7	1.0	-54.0	-13.0	-41.0	
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																				
	Low Channel (1851.5MHz)																																																																																																																																																																																																																													
	3.703	-6.1	V	3.0	40.5	1.0	-45.5	-13.0	-32.5																																																																																																																																																																																																																					
	5.555	7.7	V	3.0	40.8	1.0	-32.1	-13.0	-19.1																																																																																																																																																																																																																					
	7.406	-11.4	V	3.0	40.8	1.0	-51.2	-13.0	-38.2																																																																																																																																																																																																																					
	3.703	-0.8	H	3.0	40.5	1.0	-40.3	-13.0	-27.3																																																																																																																																																																																																																					
	5.555	2.0	H	3.0	40.8	1.0	-37.8	-13.0	-24.8																																																																																																																																																																																																																					
	7.406	-13.6	H	3.0	40.8	1.0	-53.4	-13.0	-40.4																																																																																																																																																																																																																					
	Mid Channel (1880MHz)																																																																																																																																																																																																																													
	3.760	-6.6	V	3.0	40.5	1.0	-46.2	-13.0	-33.2																																																																																																																																																																																																																					
	5.640	11.5	V	3.0	40.8	1.0	-28.3	-13.0	-15.3																																																																																																																																																																																																																					
	7.520	-11.4	V	3.0	40.7	1.0	-51.2	-13.0	-38.2																																																																																																																																																																																																																					
3.760	-1.9	H	3.0	40.5	1.0	-41.5	-13.0	-28.5																																																																																																																																																																																																																						
5.640	8.1	H	3.0	40.8	1.0	-31.7	-13.0	-18.7																																																																																																																																																																																																																						
7.520	-12.0	H	3.0	40.7	1.0	-51.7	-13.0	-38.7																																																																																																																																																																																																																						
High Channel (1908.5MHz)																																																																																																																																																																																																																														
3.817	-2.3	V	3.0	40.6	1.0	-41.9	-13.0	-28.9																																																																																																																																																																																																																						
5.726	12.1	V	3.0	40.8	1.0	-27.7	-13.0	-14.7																																																																																																																																																																																																																						
7.634	-12.8	V	3.0	40.7	1.0	-52.5	-13.0	-39.5																																																																																																																																																																																																																						
3.817	0.2	H	3.0	40.6	1.0	-39.4	-13.0	-26.4																																																																																																																																																																																																																						
5.726	8.1	H	3.0	40.8	1.0	-31.7	-13.0	-18.7																																																																																																																																																																																																																						
7.634	-14.3	H	3.0	40.7	1.0	-54.0	-13.0	-41.0																																																																																																																																																																																																																						
	Rev. 03.03.09	Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																												

		UL Korea, Ltd Suwon Laboratory Above 1GHz High Frequency Substitution Measurement									
LTE Band 2 1.4MHz QPSK	Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 2, 1.4MHz BW,QPSK										
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter Filter 1</div> <div style="border: 1px solid black; padding: 2px;">Limit FCC Part 24</div> </div>										
		f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
		Low Channel (1850.7MHz)									
		3.7014	-8.1	V	3.0	40.5	1.0	-47.6	-13.0	-34.6	
		5.5521	10.9	V	3.0	40.8	1.0	-29.0	-13.0	-16.0	
		7.4028	-9.2	V	3.0	40.8	1.0	-49.0	-13.0	-36.0	
		3.7014	-0.7	H	3.0	40.5	1.0	-40.1	-13.0	-27.1	
		5.5521	5.3	H	3.0	40.8	1.0	-34.5	-13.0	-21.5	
		7.4028	-12.9	H	3.0	40.8	1.0	-52.7	-13.0	-39.7	
	Mid Channel (1880MHz)										
	3.7600	-6.2	V	3.0	40.5	1.0	-45.8	-13.0	-32.8		
	5.6400	14.9	V	3.0	40.8	1.0	-24.9	-13.0	-11.9		
	7.5200	-10.6	V	3.0	40.7	1.0	-50.3	-13.0	-37.3		
	3.7600	1.1	H	3.0	40.5	1.0	-38.4	-13.0	-25.4		
	5.6400	8.1	H	3.0	40.8	1.0	-31.7	-13.0	-18.7		
	7.5200	-11.9	H	3.0	40.7	1.0	-51.6	-13.0	-38.6		
	High Channel (1909.3MHz)										
	3.8186	-1.2	V	3.0	40.6	1.0	-40.8	-13.0	-27.8		
	5.7279	16.0	V	3.0	40.8	1.0	-23.8	-13.0	-10.8		
	7.6372	-12.5	V	3.0	40.7	1.0	-52.1	-13.0	-39.1		
	3.8186	3.7	H	3.0	40.6	1.0	-35.9	-13.0	-22.9		
	5.7279	10.1	H	3.0	40.8	1.0	-29.6	-13.0	-16.6		
	7.6372	-13.3	H	3.0	40.7	1.0	-53.0	-13.0	-40.0		
		Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									
LTE Band 2 1.4MHz 16QAM	Company: Samsung Project #: 16K22699 Date: 02-02-16 Test Engineer: Steven Kim Configuration: EUT / AC Adapter / Ear Phone / X-Position Mode: TX, LTE BAND 2, 1.4MHz BW,16QAM										
	<div style="display: flex; justify-content: space-around;"> <div style="border: 1px solid black; padding: 2px;">Chamber Chamber 2</div> <div style="border: 1px solid black; padding: 2px;">Pre-amplifier AFS42</div> <div style="border: 1px solid black; padding: 2px;">Filter Filter 1</div> <div style="border: 1px solid black; padding: 2px;">Limit FCC Part 24</div> </div>										
		f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
		Low Channel (1850.7MHz)									
		3.7014	-8.9	V	3.0	40.5	1.0	-48.4	-13.0	-35.4	
		5.5521	8.5	V	3.0	40.8	1.0	-31.3	-13.0	-18.3	
		7.4028	-10.4	V	3.0	40.8	1.0	-50.2	-13.0	-37.2	
		3.7014	-1.9	H	3.0	40.5	1.0	-41.4	-13.0	-28.4	
		5.5521	4.2	H	3.0	40.8	1.0	-35.6	-13.0	-22.6	
		7.4028	-13.7	H	3.0	40.8	1.0	-53.4	-13.0	-40.4	
	Mid Channel (1880MHz)										
	3.7600	-6.8	V	3.0	40.5	1.0	-46.4	-13.0	-33.4		
	5.6400	13.1	V	3.0	40.8	1.0	-26.7	-13.0	-13.7		
	7.5200	-10.6	V	3.0	40.7	1.0	-50.3	-13.0	-37.3		
	3.7600	0.5	H	3.0	40.5	1.0	-39.1	-13.0	-26.1		
	5.6400	7.1	H	3.0	40.8	1.0	-32.7	-13.0	-19.7		
	7.5200	-12.3	H	3.0	40.7	1.0	-52.0	-13.0	-39.0		
	High Channel (1909.3MHz)										
	3.8186	-2.7	V	3.0	40.6	1.0	-42.3	-13.0	-29.3		
	5.7279	14.0	V	3.0	40.8	1.0	-25.8	-13.0	-12.8		
	7.6372	-12.6	V	3.0	40.7	1.0	-52.3	-13.0	-39.3		
	3.8186	2.2	H	3.0	40.6	1.0	-37.4	-13.0	-24.4		
	5.7279	8.5	H	3.0	40.8	1.0	-31.3	-13.0	-18.3		
	7.6372	-13.6	H	3.0	40.7	1.0	-53.2	-13.0	-40.2		
		Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									