



SAR EVALUATION REPORT

FCC 47 CFR § 2.1093
IEEE Std 1528-2013

For

GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n

FCC ID: A3LSMJ111M
Model Name: SM-J111M/DS, SM-J111M

Report Number: 16K22699-S1V1
Issue Date: 2/12/2016

Prepared for

SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA

Prepared by

UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-823, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



TL-637

Revision History



Rev.	Date	Revisions	Revised By
V1	2/12/2016	Initial Issue	Justin Park

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	<i>SAR Measurement System.....</i>	<i>7</i>
4.2.	<i>SAR Scan Procedures</i>	<i>8</i>
4.3.	<i>Test Equipment.....</i>	<i>10</i>
5.	Measurement Uncertainty.....	10
6.	Device Under Test (DUT) Information	11
6.1.	<i>DUT Description</i>	<i>11</i>
6.2.	<i>Wireless Technologies.....</i>	<i>11</i>
6.3.	<i>Nominal and Maximum Output Power.....</i>	<i>12</i>
6.4.	<i>General LTE SAR Test and Reporting Considerations.....</i>	<i>13</i>
7.	RF Exposure Conditions (Test Configurations)	14
8.	Dielectric Property Measurements & System Check	15
8.1.	<i>Dielectric Property Measurements</i>	<i>15</i>
8.2.	<i>System Check.....</i>	<i>18</i>
9.	Conducted Output Power Measurements.....	20
9.1.	<i>GSM</i>	<i>20</i>
9.2.	<i>W-CDMA</i>	<i>22</i>
9.3.	<i>LTE.....</i>	<i>27</i>
9.4.	<i>Wi-Fi 2.4GHz (DTS Band)</i>	<i>35</i>
9.5.	<i>Bluetooth</i>	<i>35</i>
10.	Measured and Reported (Scaled) SAR Results.....	36
10.1.	<i>GSM850.....</i>	<i>38</i>
10.2.	<i>GSM1900.....</i>	<i>39</i>
10.3.	<i>W-CDMA Band II.....</i>	<i>40</i>
10.4.	<i>W-CDMA Band IV</i>	<i>40</i>
10.5.	<i>W-CDMA Band V</i>	<i>40</i>
10.6.	<i>LTE Band 2 (20MHz Bandwidth)</i>	<i>41</i>
10.7.	<i>LTE Band 4 (20MHz Bandwidth)</i>	<i>42</i>
10.8.	<i>LTE Band 5 (10MHz Bandwidth)</i>	<i>43</i>
10.9.	<i>LTE Band 17 (10MHz Bandwidth)</i>	<i>44</i>

10.10.	<i>Wi-Fi (DTS Band)</i>	44
10.11.	<i>Bluetooth</i>	45
11.	SAR Measurement Variability	46
12.	Simultaneous Transmission SAR Analysis	47
12.1.	<i>Sum of the SAR for GSM850 & Wi-Fi & BT</i>	48
12.2.	<i>Sum of the SAR for GSM1900 & Wi-Fi & BT</i>	48
12.3.	<i>Sum of the SAR for WCDMA Band II & Wi-Fi & BT</i>	49
12.4.	<i>Sum of the SAR for WCDMA Band IV & Wi-Fi & BT</i>	49
12.5.	<i>Sum of the SAR for WCDMA Band V & Wi-Fi & BT</i>	50
12.6.	<i>Sum of the SAR for LTE Band 2 & Wi-Fi & BT</i>	50
12.7.	<i>Sum of the SAR for LTE Band 4 & Wi-Fi & BT</i>	51
12.8.	<i>Sum of the SAR for LTE Band 5 & Wi-Fi & BT</i>	51
12.9.	<i>Sum of the SAR for LTE Band 17 & Wi-Fi & BT</i>	52
Appendixes	56
	<i>16K22699-S1V1 FCC Report SAR_App A_Photos & Ant. Locations</i>	56
	<i>16K22699-S1V1 FCC Report SAR_App B_Highest SAR Test Plots</i>	56
	<i>16K22699-S1V1 FCC Report SAR_App C_System Check Plots</i>	56
	<i>16K22699-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients</i>	56
	<i>16K22699-S1V1 FCC Report SAR_App E_Probe Cal. Certificates</i>	56
	<i>16K22699-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates</i>	56

1. Attestation of Test Results

Applicant Name		SAMSUNG ELECTRONICS CO.,LTD.			
FCC ID		A3LSMJ111M			
Model Name		SM-J111M/DS, SM-J111M			
Applicable Standards		FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
SAR Limits (W/Kg)					
Exposure Category		Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure		1.6			
The Highest Reported SAR (W/kg)					
RF Exposure Conditions		Equipment Class			
		Licensed	DTS	U-NII	DSS (BT)
Head		1.081	0.817	N/A	N/A
Body-worn*		0.913	0.144		
Hotspot/Wi-Fi Direct		1.088	0.144		
Simultaneous TX	Head	1.577			
	Body-worn*	1.057			
	Hotspot/ Wi-Fi Direct	1.232			
Date Tested		WWAN: 1/24/2016 to 2/12/2016		WLAN: 1/17/2016	
Test Results		Pass			
<p>*Note: The WLAN (DTS) SAR measurement results from the original filling can be found in SAR test report 15K22514-S1V3, FCC ID A3LSMJ111F. The WLAN (DTS) antennas and surrounding circuitry is the same between these two units, and tune up power targets are identical for WLAN operations. Therefore, SAR data for WLAN from the original filling was used for this model. Spot checks for WLAN, were performed to ensure that the SAR measurements for both devices are the same.</p>					
<p>UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.</p>					
Approved & Released By:			Prepared By:		
					
JiHo Choi Operations Manager UL Korea, Ltd Suwon Laboratory			Justin Park Engineer UL Korea, Ltd Suwon Laboratory		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 648474 D04 Handset SAR v01r03
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D06 Hotspot Mode v02r01

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 1 Room
SAR 2 Room
SAR 3 Room


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

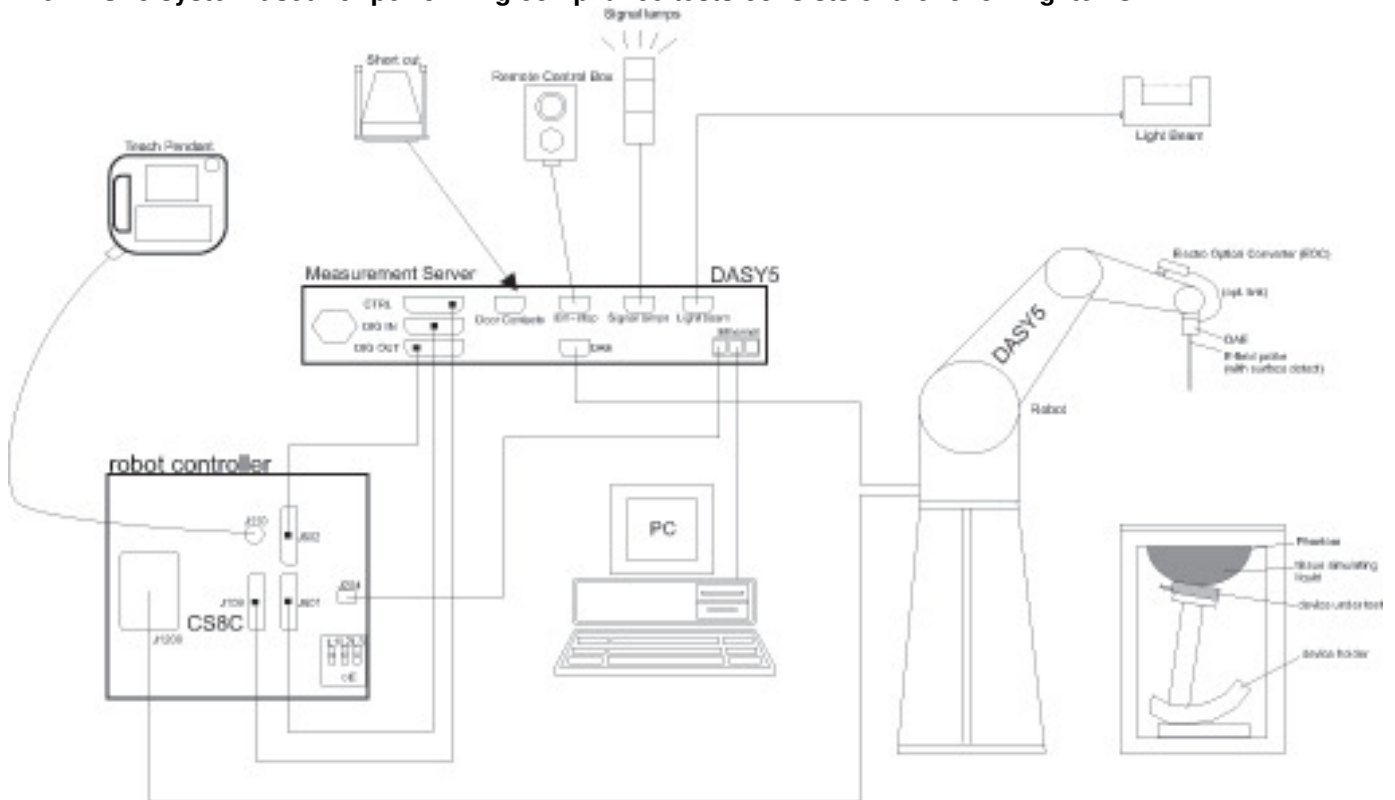

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	8-18-2016
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	8-4-2016
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3424	8-19-2016
Thermometer	Lutron	MHB-382SD	AH.91478	8-12-2016

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-18-2016
Power Sensor	Agilent	U2000A	MY54260010	8-18-2016
Power Sensor	Agilent	U2000A	MY54260007	8-18-2016
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	8-18-2016
Directional Coupler	Agilent	772D	MY52180193	8-18-2016
Directional Coupler	Agilent	778D	MY52180432	8-18-2016
Low Pass Filter	MICROLAB	LA-15N	03943	8-18-2016
Low Pass Filter	FILTRON	L14012FL	1410003S	8-18-2016
Attenuator	Agilent	8491B/003	MY39269292	8-18-2016
Attenuator	Agilent	8491B/010	MY39269315	8-18-2016
Attenuator	Agilent	8491B/020	MY39269298	8-18-2016
E-Field Probe (SAR1)	SPEAG	EX3DV4	7314	9-25-2016
E-Field Probe (SAR2)	SPEAG	EX3DV4	7376	9-2-2016
E-Field Probe (SAR3)	SPEAG	EX3DV4	7330	2-12-2016
Data Acquisition Electronics (SAR1)	SPEAG	DAE4	1447	9-23-2016
Data Acquisition Electronics (SAR2)	SPEAG	DAE4	1468	9-15-2016
Data Acquisition Electronics (SAR3)	SPEAG	DAE4	1494	11-11-2016
System Validation Dipole	SPEAG	D750V3	1122	8-17-2016
System Validation Dipole	SPEAG	D835V2	4d194	9-17-2016
System Validation Dipole	SPEAG	D1750V2	1125	8-20-2016
System Validation Dipole	SPEAG	D1900V2	5d199	2-6-2016
System Validation Dipole	SPEAG	D1900V2	5d190	9-29-2016
System Validation Dipole	SPEAG	D2450V2	960	2-5-2016
Thermometer (SAR1)	Lutron	MHB-382SD	AH.91463	8-12-2016
Thermometer (SAR2)	Lutron	MHB-382SD	AH.50215	8-19-2016
Thermometer (SAR3)	Lutron	MHB-382SD	AH.50213	8-24-2016

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	150313	8-18-2016
Base Station Simulator	R & S	CMW500	150314	8-18-2016

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 132 mm x 69 mm Overall Diagonal: 141 mm Display Diagonal: 110 mm															
Back Cover	<input checked="" type="checkbox"/> Normal Battery Cover <input type="checkbox"/> Normal Battery Cover with NFC <input type="checkbox"/> Wireless Charger Battery Cover <input type="checkbox"/> Wireless Charger Battery Cover with NFC <input type="checkbox"/> The rechargeable battery is not user accessible.															
Battery Options	<input checked="" type="checkbox"/> Standard – Lithium-ion battery, Rating 3.8Vdc, 7.22Wh <input type="checkbox"/> Extended (large capacity) <input type="checkbox"/> The rechargeable battery is not user accessible.															
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz)															
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz)															
Test sample information	<table border="1"> <thead> <tr> <th>No.</th> <th>S/N</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td rowspan="5">1</td> <td>R38GC0890NJ</td> <td rowspan="5">WWAN SAR, CONDUCTED</td> </tr> <tr> <td>R38GC088YSW</td> </tr> <tr> <td>R38GC08AGLV</td> </tr> <tr> <td>R38GC08AGGJ</td> </tr> <tr> <td>R38GC08AGKK</td> </tr> <tr> <td rowspan="2">2</td> <td>R38GB1417QP</td> <td>WLAN SAR</td> </tr> <tr> <td>R38GB1416ZE</td> <td>WLAN CONDUCTED</td> </tr> </tbody> </table>	No.	S/N	Notes	1	R38GC0890NJ	WWAN SAR, CONDUCTED	R38GC088YSW	R38GC08AGLV	R38GC08AGGJ	R38GC08AGKK	2	R38GB1417QP	WLAN SAR	R38GB1416ZE	WLAN CONDUCTED
No.	S/N	Notes														
1	R38GC0890NJ	WWAN SAR, CONDUCTED														
	R38GC088YSW															
	R38GC08AGLV															
	R38GC08AGGJ															
	R38GC08AGKK															
2	R38GB1417QP	WLAN SAR														
	R38GB1416ZE	WLAN CONDUCTED														

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK)	GPRS Multi-Slot Class:	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
		GPRS (GMSK)	<input type="checkbox"/> Class 8 - 1 Up, 4 Down <input type="checkbox"/> Class 10 - 2 Up, 4 Down <input checked="" type="checkbox"/> Class 12 - 4 Up, 4 Down <input type="checkbox"/> Class 33 - 4 Up, 5 Down	
Does this device support DTM (Dual Transfer Mode)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				
W-CDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 17	QPSK 16QAM		100% (FDD)
		Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		100%
Bluetooth	2.4 GHz	Version 4.0 LE		N/A

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

Upper limit (dB): -1.5 ~ 0.5		Max. RF Output Power (dBm)		Reduce. RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit	Target	Max. tune-up tolerance limit
GSM850	Voice (1 slot)	32.5	33.0	N/A	
	GPRS 1 slot	32.5	33.0		
	GPRS 2 slots	29.5	30.0		
	GPRS 3 slots	27.0	27.5		
	GPRS 4 slots	26.5	27.0		
	EGPRS 1 slot	26.5	27.0		
	EGPRS 2 slots	26.0	26.5		
	EGPRS 3 slots	25.0	25.5		
GSM1900	Voice (1 slot)	29.5	30.0	N/A	
	GPRS 1 slot	29.5	30.0		
	GPRS 2 slots	27.0	27.5		
	GPRS 3 slots	25.5	26.0		
	GPRS 4 slots	23.5	24.0		
	EGPRS 1 slot	26.0	26.5		
	EGPRS 2 slots	25.5	26.0		
	EGPRS 3 slots	23.5	24.0		
W-CDMA Band II	R99	22.5	23.0	21.5	22.0
	HSDPA	22.0	22.5	21.0	21.5
	HSUPA	20.5	21.0	19.0	19.5
W-CDMA Band IV	R99	22.0	22.5	20.0	20.5
	HSDPA	22.0	22.5	20.0	20.5
	HSUPA	20.5	21.0	18.5	19.0
W-CDMA Band V	R99	22.5	23.0	N/A	
	HSDPA	22.0	22.5		
	HSUPA	20.5	21.0		
LTE Band 2	QPSK, 16QAM	23.0	23.5	22.5	23.0
LTE Band 4	QPSK, 16QAM	23.0	23.5	20.0	20.5
LTE Band 5	QPSK, 16QAM	23.0	23.5	N/A	
LTE Band 17	QPSK, 16QAM	23.0	23.5	N/A	

Notes:

- 1) The WCDMA Band II and LTE Band 2 power reduction mechanism are additionally used for Head SAR compliance, and is activated when the device is held-to-ear (for voice or VoIP calls) for all voice and data modes on the main antenna. The held-to-ear RF exposure Conditions were evaluated at reduce power for the main antenna modes according to the head SAR test positions described in IEEE 1528-2013.
- 2) The device utilizes power reduction under some portable hotspot conditions for SAR compliance. There is power reduction for WCDMA Band IV, LTE Band 4. The reduced powers were confirmed via conducted power measurements the RF port. Detailed description of the hotspot power reduction mechanism is included in the operational description.

Upper limit (dB): 0.5		Max. RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	16.0	16.5
	802.11g	14.0	14.5
	802.11n HT20	14.0	14.5
Bluetooth		10.0	10.5
Bluetooth LE		0.0	0.5

6.4. General LTE SAR Test and Reporting Considerations

Item	Description																																												
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850-1910 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7																																						
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880																																						
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3																																						
	Band 4	Frequency range: 1710 - 1755 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7																																						
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5																																						
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3																																						
	Band 5	Frequency range: 824 - 849 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7																																						
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5																																						
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3																																						
	Band 17	Frequency range: 704 - 716 MHz																																											
		Channel Bandwidth																																											
20 MHz		15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																							
Low			23780/ 709	23755/ 706.5																																									
Mid			23790/ 710	23790/ 710																																									
High			23800/ 711	23825/ 713.5																																									
LTE transmitter and antenna implementation	LTE has one (1) TX/RX antenna Refer to Appendix A...																																												
Maximum power reduction (MPR)	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing</p>							Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																						
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																							
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																						
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																						
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																						
Power reduction	Yes																																												
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																												

7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
		Edge 4 (Left)	< 25 mm	Yes		
WLAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
		Edge 4 (Left)	< 25 mm	Yes		

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:**SAR 1 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1-17-2016	Head 2450	e'	39.3900	Relative Permittivity (ϵ_r):	39.39	39.20	0.48	5
		e''	13.0900	Conductivity (σ):	1.78	1.80	-0.93	5
	Head 2410	e'	39.5100	Relative Permittivity (ϵ_r):	39.51	39.28	0.59	5
		e''	13.0400	Conductivity (σ):	1.75	1.76	-0.74	5
	Head 2475	e'	39.3000	Relative Permittivity (ϵ_r):	39.30	39.17	0.34	5
		e''	13.1600	Conductivity (σ):	1.81	1.83	-0.87	5

SAR 2 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1-17-2016	Body 2450	e'	51.3400	Relative Permittivity (ϵ_r):	51.34	52.70	-2.58	5
		e''	14.3000	Conductivity (σ):	1.95	1.95	-0.10	5
	Body 2410	e'	51.5100	Relative Permittivity (ϵ_r):	51.51	52.76	-2.37	5
		e''	14.1400	Conductivity (σ):	1.89	1.91	-0.66	5
	Body 2475	e'	51.2300	Relative Permittivity (ϵ_r):	51.23	52.67	-2.73	5
		e''	14.4500	Conductivity (σ):	1.99	1.99	0.17	5
1-24-2016	Body 835	e'	53.1700	Relative Permittivity (ϵ_r):	53.17	55.20	-3.68	5
		e''	21.7600	Conductivity (σ):	1.01	0.97	4.15	5
	Body 820	e'	53.3400	Relative Permittivity (ϵ_r):	53.34	55.28	-3.50	5
		e''	21.9100	Conductivity (σ):	1.00	0.97	3.15	5
	Body 850	e'	52.9900	Relative Permittivity (ϵ_r):	52.99	55.16	-3.93	5
		e''	21.5900	Conductivity (σ):	1.02	0.99	3.37	5
1-26-2016	Head 835	e'	41.2900	Relative Permittivity (ϵ_r):	41.29	41.50	-0.51	5
		e''	18.9800	Conductivity (σ):	0.88	0.90	-2.09	5
	Head 820	e'	41.4400	Relative Permittivity (ϵ_r):	41.44	41.60	-0.39	5
		e''	18.9800	Conductivity (σ):	0.87	0.90	-3.68	5
	Head 850	e'	41.1300	Relative Permittivity (ϵ_r):	41.13	41.50	-0.89	5
		e''	19.0400	Conductivity (σ):	0.90	0.92	-1.65	5
1-28-2016	Head 1750	e'	41.8700	Relative Permittivity (ϵ_r):	41.87	40.08	4.45	5
		e''	13.5300	Conductivity (σ):	1.32	1.37	-3.83	5
	Head 1710	e'	42.0200	Relative Permittivity (ϵ_r):	42.02	40.15	4.67	5
		e''	13.5000	Conductivity (σ):	1.28	1.35	-4.67	5
	Head 1755	e'	41.8500	Relative Permittivity (ϵ_r):	41.85	40.08	4.42	5
		e''	13.5400	Conductivity (σ):	1.32	1.37	-3.68	5
1-28-2016	Head 1900	e'	41.4700	Relative Permittivity (ϵ_r):	41.47	40.00	3.68	5
		e''	13.7000	Conductivity (σ):	1.45	1.40	3.38	5
	Head 1850	e'	41.5600	Relative Permittivity (ϵ_r):	41.56	40.00	3.90	5
		e''	13.6100	Conductivity (σ):	1.40	1.40	0.00	5
	Head 1910	e'	41.4500	Relative Permittivity (ϵ_r):	41.45	40.00	3.63	5
		e''	13.7300	Conductivity (σ):	1.46	1.40	4.15	5
1-29-2016	Body 835	e'	52.7300	Relative Permittivity (ϵ_r):	52.73	55.20	-4.47	5
		e''	21.7500	Conductivity (σ):	1.01	0.97	4.11	5
	Body 820	e'	52.8800	Relative Permittivity (ϵ_r):	52.88	55.28	-4.34	5
		e''	21.8500	Conductivity (σ):	1.00	0.97	2.87	5
	Body 850	e'	52.6000	Relative Permittivity (ϵ_r):	52.60	55.16	-4.64	5
		e''	21.6700	Conductivity (σ):	1.02	0.99	3.75	5
1-31-2016	Head 835	e'	41.0300	Relative Permittivity (ϵ_r):	41.03	41.50	-1.13	5
		e''	18.9400	Conductivity (σ):	0.88	0.90	-2.29	5
	Head 820	e'	41.2000	Relative Permittivity (ϵ_r):	41.20	41.60	-0.97	5
		e''	18.9700	Conductivity (σ):	0.86	0.90	-3.73	5
	Head 850	e'	40.9000	Relative Permittivity (ϵ_r):	40.90	41.50	-1.45	5
		e''	18.9500	Conductivity (σ):	0.90	0.92	-2.12	5

SAR 3 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1-25-2016	Head 1900	e'	39.9900	Relative Permittivity (ϵ_r):	39.99	40.00	-0.02	5
		e''	13.1300	Conductivity (σ):	1.39	1.40	-0.92	5
	Head 1850	e'	40.1600	Relative Permittivity (ϵ_r):	40.16	40.00	0.40	5
		e''	13.0300	Conductivity (σ):	1.34	1.40	-4.26	5
	Head 1910	e'	39.9600	Relative Permittivity (ϵ_r):	39.96	40.00	-0.10	5
		e''	13.1400	Conductivity (σ):	1.40	1.40	-0.32	5
1-27-2016	Body 750	e'	54.2600	Relative Permittivity (ϵ_r):	54.26	55.55	-2.32	5
		e''	23.4000	Conductivity (σ):	0.98	0.96	1.32	5
	Body 700	e'	54.8300	Relative Permittivity (ϵ_r):	54.83	55.74	-1.63	5
		e''	23.8500	Conductivity (σ):	0.93	0.96	-3.23	5
	Body 790	e'	53.8200	Relative Permittivity (ϵ_r):	53.82	55.39	-2.84	5
		e''	23.0900	Conductivity (σ):	1.01	0.97	4.98	5
1-27-2016	Head 750	e'	41.0800	Relative Permittivity (ϵ_r):	41.08	41.96	-2.10	5
		e''	21.3500	Conductivity (σ):	0.89	0.89	-0.31	5
	Head 700	e'	41.7500	Relative Permittivity (ϵ_r):	41.75	42.22	-1.11	5
		e''	21.7200	Conductivity (σ):	0.85	0.89	-4.93	5
	Head 790	e'	40.5400	Relative Permittivity (ϵ_r):	40.54	41.76	-2.91	5
		e''	21.0800	Conductivity (σ):	0.93	0.90	3.33	5
1-28-2016	Body 1750	e'	53.9800	Relative Permittivity (ϵ_r):	53.98	53.44	1.01	5
		e''	15.0200	Conductivity (σ):	1.46	1.49	-1.66	5
	Body 1710	e'	54.1500	Relative Permittivity (ϵ_r):	54.15	53.54	1.13	5
		e''	14.9100	Conductivity (σ):	1.42	1.46	-3.00	5
	Body 1755	e'	53.9500	Relative Permittivity (ϵ_r):	53.95	53.43	0.98	5
		e''	15.0200	Conductivity (σ):	1.47	1.49	-1.58	5
1-28-2016	Body 1900	e'	53.4200	Relative Permittivity (ϵ_r):	53.42	53.30	0.23	5
		e''	14.8900	Conductivity (σ):	1.57	1.52	3.49	5
	Body 1850	e'	53.4900	Relative Permittivity (ϵ_r):	53.49	53.30	0.36	5
		e''	14.9900	Conductivity (σ):	1.54	1.52	1.44	5
	Body 1910	e'	53.4300	Relative Permittivity (ϵ_r):	53.43	53.30	0.24	5
		e''	14.8900	Conductivity (σ):	1.58	1.52	4.04	5
2-1-2016	Body 1900	e'	53.7200	Relative Permittivity (ϵ_r):	53.72	53.30	0.79	5
		e''	14.9400	Conductivity (σ):	1.58	1.52	3.84	5
	Body 1850	e'	53.8500	Relative Permittivity (ϵ_r):	53.85	53.30	1.03	5
		e''	14.9100	Conductivity (σ):	1.53	1.52	0.90	5
	Body 1910	e'	53.7000	Relative Permittivity (ϵ_r):	53.70	53.30	0.75	5
		e''	14.9600	Conductivity (σ):	1.59	1.52	4.53	5
2-1-2016	Body 1750	e'	54.0500	Relative Permittivity (ϵ_r):	54.05	53.44	1.14	5
		e''	14.7600	Conductivity (σ):	1.44	1.49	-3.36	5
	Body 1710	e'	54.1400	Relative Permittivity (ϵ_r):	54.14	53.54	1.11	5
		e''	14.7900	Conductivity (σ):	1.41	1.46	-3.78	5
	Body 1755	e'	54.0500	Relative Permittivity (ϵ_r):	54.05	53.43	1.16	5
		e''	14.7600	Conductivity (σ):	1.44	1.49	-3.28	5
2-2-2016	Head 1750	e'	39.3900	Relative Permittivity (ϵ_r):	39.39	40.08	-1.73	5
		e''	13.4800	Conductivity (σ):	1.31	1.37	-4.19	5
	Head 1710	e'	39.5800	Relative Permittivity (ϵ_r):	39.58	40.15	-1.41	5
		e''	13.4600	Conductivity (σ):	1.28	1.35	-4.95	5
	Head 1755	e'	39.3800	Relative Permittivity (ϵ_r):	39.38	40.08	-1.74	5
		e''	13.4800	Conductivity (σ):	1.32	1.37	-4.11	5
2-2-2016	Head 1900	e'	38.8900	Relative Permittivity (ϵ_r):	38.89	40.00	-2.78	5
		e''	13.7400	Conductivity (σ):	1.45	1.40	3.68	5
	Head 1850	e'	39.1000	Relative Permittivity (ϵ_r):	39.10	40.00	-2.25	5
		e''	13.6300	Conductivity (σ):	1.40	1.40	0.15	5
	Head 1910	e'	38.8400	Relative Permittivity (ϵ_r):	38.84	40.00	-2.90	5
		e''	13.7700	Conductivity (σ):	1.46	1.40	4.46	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D750V3	1122	8-17-2015	750	1g	8.23	8.60
				10g	5.37	5.67
D835V2	4d194	9-17-2015	835	1g	9.38	9.49
				10g	6.09	6.18
D1750V2	1125	8-20-2015	1750	1g	36.70	37.20
				10g	19.50	20.00
D1900V2	5d199	2-6-2015	1900	1g	41.00	40.60
				10g	21.40	21.60
D1900V2	5d190	9-29-2015	1900	1g	39.70	39.60
				10g	20.70	20.80
D2450V2	960	2-5-2015	2450	1g	53.30	50.80
				10g	24.80	23.60

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR 1 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1-17-2016	D2450V2	960	Head	1g	5.30	53.00	53.30	-0.56	1,2
				10g	2.41	24.10	24.80	-2.82	

SAR 2 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1-17-2016	D2450V2	4d194	Body	1g	5.08	50.80	50.80	0.00	
				10g	2.33	23.30	23.60	-1.27	
1-24-2016	D835V2	4d194	Body	1g	1.01	10.10	9.49	6.43	
				10g	0.67	6.67	6.18	7.93	
1-26-2016	D835V2	4d194	Head	1g	0.98	9.79	9.38	4.37	
				10g	0.65	6.50	6.09	6.73	
1-28-2016	D1750V2	1125	Head	1g	3.61	36.10	36.70	-1.63	
				10g	1.91	19.10	19.50	-2.05	
1-28-2016	D1900V2	5d199	Head	1g	4.10	41.00	41.00	0.00	
				10g	2.10	21.00	21.40	-1.87	
1-29-2016	D835V2	4d194	Body	1g	1.00	10.00	9.49	5.37	
				10g	0.66	6.59	6.18	6.63	
1-31-2016	D835V2	4d194	Head	1g	1.00	10.00	9.38	6.61	3, 4
				10g	0.67	6.65	6.09	9.20	

SAR 3 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1-25-2016	D1900V2	5d199	Head	1g	3.84	38.40	41.00	-6.34	5, 6
				10g	1.95	19.50	21.40	-8.88	
1-27-2016	D750V3	1122	Body	1g	0.91	9.11	8.60	5.93	7, 8
				10g	0.61	6.06	5.67	6.88	
1-27-2016	D750V3	1122	Head	1g	0.79	7.85	8.23	-4.62	
				10g	0.52	5.20	5.37	-3.17	
1-28-2016	D1750V2	1125	Body	1g	3.57	35.70	37.20	-4.03	
				10g	1.87	18.70	20.00	-6.50	
1-28-2016	D1900V2	5d199	Body	1g	3.95	39.50	40.60	-2.71	
				10g	2.00	20.00	21.60	-7.41	
2-01-2016	D1750V2	1125	Body	1g	3.47	34.70	37.20	-6.72	9, 10
				10g	1.82	18.20	20.00	-9.00	
2-01-2016	D1900V2	5d190	Body	1g	3.81	38.10	39.60	-3.79	
				10g	1.93	19.30	20.80	-7.21	
2-02-2016	D1900V2	5d190	Head	1g	3.92	39.20	39.70	-1.26	
				10g	1.99	19.90	20.70	-3.86	
2-02-2016	D1750V2	1125	Head	1g	3.46	34.60	36.70	-5.72	
				10g	1.82	18.20	19.50	-6.67	

9. Conducted Output Power Measurements

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max. Pwr				
						Burst (dBm)	Frame (dBm)			
850	GSM (Voice)	CS1	1	128	824.2	32.5	23.4			
				190	836.6	32.6	23.6			
				251	848.8	32.6	23.6			
	GPRS (GMSK)	CS1	1	1	128	824.2	32.5	23.4		
					190	836.6	32.6	23.6		
					251	848.8	32.6	23.6		
			2	2	128	824.2	29.1	23.0		
					190	836.6	29.2	23.2		
					251	848.8	29.3	23.3		
			3	3	128	824.2	27.0	22.7		
					190	836.6	27.1	22.9		
					251	848.8	27.2	23.0		
			4	4	128	824.2	26.1	23.1		
					190	836.6	26.3	23.3		
					251	848.8	26.4	23.4		
			EGPRS (8PSK)	MCS5	1	1	128	824.2	26.1	17.0
							190	836.6	26.1	17.0
							251	848.8	26.4	17.4
	2	2			128	824.2	25.8	19.8		
					190	836.6	25.9	19.9		
					251	848.8	26.1	20.1		
	3	3			128	824.2	24.6	20.3		
					190	836.6	24.7	20.5		
					251	848.8	25.0	20.7		
4	4	128			824.2	22.3	19.3			
		190			836.6	22.5	19.4			
		251			848.8	22.7	19.7			

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn: GMSK Voice Mode
- Head VoIP & Hotspot mode: GMSK (GPRS) mode with 1 time slots for Max power, based on the output power measurements above.
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max. Pwr		
						Burst (dBm)	Frame (dBm)	
1900	GSM (Voice)	CS1	1	512	1850.2	29.9	20.9	
				661	1880.0	29.5	20.5	
				810	1909.8	29.7	20.6	
	GPRS (GMSK)	CS1	1	1	512	1850.2	29.9	20.9
					661	1880.0	29.5	20.5
					810	1909.8	29.7	20.6
			2	1	512	1850.2	26.4	20.4
					661	1880.0	26.6	20.6
					810	1909.8	26.7	20.7
			3	1	512	1850.2	25.0	20.7
					661	1880.0	25.1	20.8
					810	1909.8	25.2	20.9
			4	1	512	1850.2	23.4	20.3
					661	1880.0	23.5	20.5
					810	1909.8	23.6	20.6
	EGPRS (8PSK)	MCS5	1	1	512	1850.2	25.7	16.6
					661	1880.0	25.7	16.6
					810	1909.8	25.7	16.7
			2	1	512	1850.2	25.4	19.4
					661	1880.0	25.4	19.4
					810	1909.8	25.4	19.4
			3	1	512	1850.2	23.6	19.4
					661	1880.0	23.6	19.3
					810	1909.8	23.6	19.3
4			1	512	1850.2	21.4	18.4	
				661	1880.0	21.3	18.3	
				810	1909.8	21.3	18.3	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn: GMSK Voice Mode
- Head VoIP & Hotspot mode: GMSK (GPRS) mode with 3 time slots for Max power, based on the output power measurements above.
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Mode	Subtest	HSDPA	HSDPA	HSDPA	HSDPA
		1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
$A_{hs}=\beta_{hs}/\beta_c$	30/15				

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
A _{hs} = β_{hs}/β_c	30/15					
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelisation Codes	2xSF2				SF4	

W-CDMA Band II Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Pwr (dBm)	MPR (dB)	Reduce. Pwr (dBm)
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	22.9	N/A	21.9
			9400	1880.0	N/A	22.5	N/A	21.4
			9538	1907.6	N/A	22.5	N/A	21.5
	HSDPA	Subtest 1	9262	1852.4	0	21.6	0	20.6
			9400	1880.0	0	20.8	0	19.9
			9538	1907.6	0	20.8	0	19.8
		Subtest 2	9262	1852.4	0	21.6	0	20.7
			9400	1880.0	0	20.9	0	19.9
			9538	1907.6	0	21.1	0	20.0
		Subtest 3	9262	1852.4	0.5	21.7	0	20.6
			9400	1880.0	0.5	20.9	0	19.9
			9538	1907.6	0.5	21.1	0	20.0
		Subtest 4	9262	1852.4	0.5	21.8	0	20.7
			9400	1880.0	0.5	20.9	0	19.8
			9538	1907.6	0.5	21.1	0	20.0
	HSUPA	Subtest 1	9262	1852.4	0	19.1	0	18.3
			9400	1880.0	0	19.0	0	17.6
			9538	1907.6	0	19.0	0	17.6
		Subtest 2	9262	1852.4	2	17.9	0	18.0
			9400	1880.0	2	17.1	0	17.5
			9538	1907.6	2	17.2	0	17.5
		Subtest 3	9262	1852.4	1	19.2	0	19.3
			9400	1880.0	1	18.4	0	18.1
			9538	1907.6	1	18.5	0	18.1
		Subtest 4	9262	1852.4	2	18.7	0	18.8
			9400	1880.0	2	17.9	0	18.0
			9538	1907.6	2	17.9	0	18.1
		Subtest 5	9262	1852.4	0	21.0	0	19.5
			9400	1880.0	0	20.3	0	19.2
			9538	1907.6	0	20.4	0	19.3

W-CDMA Band IV Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Pwr (dBm)	MPR (dB)	Reduce. Pwr (dBm)	
W-CDMA Band IV	Rel 99	RMC, 12.2 kbps	1312	1712.4	N/A	22.0	N/A	19.0	
			1413	1732.6	N/A	22.1	N/A	19.5	
			1513	1752.6	N/A	22.2	N/A	19.2	
	HSDPA	Subtest 1	1312	1712.4	0	20.6	0	18.8	
			1413	1732.6	0	21.5	0	19.5	
			1513	1752.6	0	20.9	0	18.8	
		Subtest 2	1312	1712.4	0	20.7	0	18.6	
			1413	1732.6	0	21.5	0	19.5	
			1513	1752.6	0	21.0	0	18.6	
		Subtest 3	1312	1712.4	0.5	20.6	0	18.5	
			1413	1732.6	0.5	21.6	0	19.5	
			1513	1752.6	0.5	20.9	0	18.6	
		Subtest 4	1312	1712.4	0.5	20.7	0	18.6	
			1413	1732.6	0.5	21.7	0	19.5	
			1513	1752.6	0.5	21.0	0	18.6	
		HSUPA	Subtest 1	1312	1712.4	0	19.1	0	17.0
				1413	1732.6	0	20.1	0	17.9
				1513	1752.6	0	19.4	0	17.2
	Subtest 2		1312	1712.4	2	17.4	0	17.1	
			1413	1732.6	2	18.3	0	18.3	
			1513	1752.6	2	17.6	0	17.6	
	Subtest 3		1312	1712.4	1	18.7	0	17.8	
			1413	1732.6	1	19.5	0	18.1	
			1513	1752.6	1	18.8	0	17.4	
	Subtest 4		1312	1712.4	2	18.1	0	17.6	
			1413	1732.6	2	19.0	0	18.3	
			1513	1752.6	2	18.3	0	17.8	
	Subtest 5		1312	1712.4	0	19.7	0	17.7	
			1413	1732.6	0	20.7	0	18.3	
			1513	1752.6	0	19.8	0	17.9	

W-CDMA Band V Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Pwr (dBm)	
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	22.7	
			4183	836.6	N/A	22.7	
			4233	846.6	N/A	22.7	
	HSDPA	Subtest 1	4132	826.4	0	21.4	
			4183	836.6	0	21.3	
			4233	846.6	0	21.5	
		Subtest 2	4132	826.4	0	21.4	
			4183	836.6	0	21.4	
			4233	846.6	0	21.6	
		Subtest 3	4132	826.4	0.5	21.6	
			4183	836.6	0.5	21.4	
			4233	846.6	0.5	21.7	
		Subtest 4	4132	826.4	0.5	21.6	
			4183	836.6	0.5	21.4	
			4233	846.6	0.5	21.7	
		HSUPA	Subtest 1	4132	826.4	0	19.0
				4183	836.6	0	19.4
				4233	846.6	0	19.6
	Subtest 2		4132	826.4	2	17.6	
			4183	836.6	2	17.9	
			4233	846.6	2	18.1	
	Subtest 3		4132	826.4	1	18.3	
			4183	836.6	1	18.6	
			4233	846.6	1	18.9	
	Subtest 4		4132	826.4	2	17.5	
			4183	836.6	2	17.9	
			4233	846.6	2	18.2	
	Subtest 5		4132	826.4	0	20.7	
			4183	836.6	0	20.9	
			4233	846.6	0	21.0	

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 2 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1860 MHz	1880 MHz	1900 MHz		1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	23.4	23.2	22.8	0	22.7	22.6	22.2
			1	49	0	23.3	22.9	22.6	0	22.5	22.4	21.8
			1	99	0	23.3	22.8	23.0	0	22.5	22.2	22.4
			50	0	1	22.2	22.0	21.3	1	21.6	21.4	20.5
			50	24	1	22.0	21.9	21.2	1	21.4	21.2	20.3
			50	50	1	22.0	21.8	21.2	1	21.3	21.3	20.5
		16QAM	100	0	1	22.0	21.9	21.2	1	21.4	21.2	20.3
			1	0	1	22.4	22.5	22.0	1	21.9	22.0	21.4
			1	49	1	22.2	22.3	21.7	1	21.6	21.9	20.8
			1	99	1	22.2	22.2	22.2	1	21.6	21.7	21.6
			50	0	2	21.5	21.5	20.5	3	18.3	18.5	18.7
			50	24	2	21.4	21.2	20.4	3	18.3	18.0	19.0
			50	50	2	21.3	21.3	20.4	3	18.8	18.0	18.5
			100	0	2	21.4	21.2	20.4	3	18.2	18.3	18.9

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1857.5 MHz	1880 MHz	1902.5 MHz		1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	23.3	23.2	22.8	0	22.8	22.5	21.8
			1	37	0	23.1	23.0	22.8	0	22.5	22.4	21.8
			1	74	0	23.1	22.9	23.2	0	22.6	22.1	22.3
			36	0	1	22.1	21.7	21.2	1	21.6	21.1	20.4
			36	20	1	22.0	21.8	21.2	1	21.5	21.1	20.4
			36	39	1	21.9	21.8	21.2	1	21.4	21.2	21.1
		16QAM	75	0	1	22.0	21.8	21.2	1	21.5	21.3	20.5
			1	0	1	22.2	22.0	21.3	1	21.8	21.8	20.5
			1	37	1	22.0	21.8	21.2	1	21.6	21.5	20.5
			1	74	1	22.0	21.6	21.7	1	21.6	21.3	21.1
			36	0	2	21.5	21.1	20.4	3	18.2	18.4	19.0
			36	20	2	21.4	21.2	20.5	3	18.4	18.0	18.7
			36	39	2	21.4	21.2	20.5	3	18.2	18.0	18.0
			75	0	2	21.4	21.1	20.4	3	18.2	18.1	18.4

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1855 MHz	1880 MHz	1905 MHz		1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	23.4	23.4	22.6	0	22.6	22.6	21.7
			1	25	0	23.4	23.1	22.6	0	22.6	22.3	21.7
			1	49	0	23.3	23.2	23.0	0	22.4	22.3	22.1
			25	0	1	22.2	21.8	21.2	1	21.6	21.1	20.5
			25	12	1	22.1	21.8	21.2	1	21.6	21.2	20.5
			25	25	1	22.0	21.7	21.6	1	21.4	21.2	21.0
		16QAM	50	0	1	22.1	21.7	21.1	1	21.6	21.2	20.5
			1	0	1	22.2	21.9	21.2	1	21.6	21.6	20.5
			1	25	1	22.1	21.6	21.1	1	21.5	21.3	20.3
			1	49	1	22.0	21.6	21.6	1	21.4	21.3	20.9
			25	0	2	21.5	21.0	20.4	3	18.2	18.0	18.7
			25	12	2	21.5	21.2	20.4	3	18.3	18.1	18.3
			25	25	2	21.5	21.1	21.0	3	18.5	18.2	18.1
			50	0	2	21.5	21.2	20.4	3	18.4	18.2	18.4

LTE Band 2 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1852.5 MHz	1880 MHz	1907.5 MHz		1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	23.4	23.2	22.7	0	22.5	22.4	21.8
			1	12	0	23.4	23.3	23.0	0	22.5	22.4	22.1
			1	24	0	23.4	23.2	23.0	0	22.5	22.4	22.3
			12	0	1	22.3	22.0	21.7	1	21.7	21.2	21.0
			12	7	1	22.3	21.9	21.7	1	21.7	21.1	21.0
			12	13	1	22.3	21.9	21.7	1	21.7	21.1	21.1
		16QAM	25	0	1	22.3	21.8	21.7	1	21.7	21.2	21.0
			1	0	1	22.1	21.9	21.0	1	21.4	21.3	21.3
			1	12	1	22.1	22.0	21.5	1	21.5	21.4	21.9
			1	24	1	22.0	22.0	21.5	1	21.4	21.4	22.0
			12	0	2	21.4	21.4	20.8	3	18.7	18.0	18.0
			12	7	2	21.5	21.3	20.8	3	18.1	18.1	18.0
			12	13	2	21.5	21.3	20.9	3	18.1	18.0	18.1
			25	0	2	21.5	21.2	21.0	3	18.9	18.0	18.0

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1851.5 MHz	1880 MHz	1908.5 MHz		1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	23.1	22.8	23.2	0	22.6	22.1	22.3
			1	8	0	23.2	22.9	23.2	0	22.7	22.1	22.4
			1	14	0	23.4	22.9	23.2	0	22.8	22.1	22.4
			8	0	1	22.1	21.7	21.7	1	21.7	21.3	21.1
			8	4	1	22.1	21.7	21.7	1	21.7	21.1	21.2
			8	7	1	22.1	21.6	21.8	1	21.8	21.1	21.2
		16QAM	15	0	1	22.1	21.7	21.8	1	21.7	21.3	21.1
			1	0	1	21.9	21.9	22.0	1	21.5	21.1	21.4
			1	8	1	22.0	21.8	21.9	1	21.4	21.0	21.4
			1	14	1	22.0	21.6	21.9	1	21.5	21.0	21.3
			8	0	2	21.4	21.0	21.1	3	18.8	18.1	18.0
			8	4	2	21.5	21.0	21.1	3	18.9	18.2	18.0
			8	7	2	21.5	20.9	21.2	3	19.0	18.2	18.0
			15	0	2	21.5	21.1	21.1	3	18.8	18.1	18.0

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1850.7 MHz	1880 MHz	1909.3 MHz		1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	23.2	23.0	23.0	0	22.7	22.2	22.4
			1	3	0	23.2	23.0	23.0	0	22.7	22.2	22.4
			1	5	0	23.3	22.9	23.0	0	22.7	22.1	22.4
			3	0	0	23.3	22.9	23.0	0	22.5	22.3	22.3
			3	1	0	23.2	22.9	23.0	0	22.7	22.4	22.2
			3	3	0	23.2	22.9	23.0	0	22.6	22.2	22.3
		16QAM	6	0	1	22.2	21.8	21.8	0	21.6	21.2	21.1
			1	0	1	21.5	22.1	22.3	0	21.7	21.0	21.8
			1	3	1	21.5	22.2	22.3	0	21.7	21.0	21.9
			1	5	1	21.5	22.1	22.3	0	21.6	21.0	22.4
			3	0	1	22.5	22.1	22.4	0	22.6	22.2	22.3
			3	1	1	22.5	22.1	22.4	0	22.2	21.6	21.7
			3	3	1	22.5	22.1	22.4	0	22.6	22.2	22.3
			6	0	2	21.5	21.3	21.1	1	21.7	21.2	21.1

LTE Band 4 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1720 MHz	1732.5 MHz	1745 MHz		1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	22.2	22.5	22.2	0	19.7	19.8	20.4
			1	49	0	22.1	22.3	22.2	0	19.6	20.3	19.4
			1	99	0	22.1	22.5	22.2	0	20.2	19.5	19.5
			50	0	1	21.9	21.6	21.6	1	18.5	19.1	18.8
			50	24	1	21.8	21.7	21.7	1	18.5	19.2	18.6
			50	50	1	21.7	21.6	21.6	1	18.8	19.1	18.2
		16QAM	100	0	1	21.8	21.6	21.7	1	18.4	19.1	18.5
			1	0	1	22.2	22.0	22.3	0	19.8	19.8	20.5
			1	49	1	22.2	21.9	22.3	0	19.6	20.3	19.5
			1	99	1	21.9	21.7	22.3	0	20.2	19.5	19.3
			50	0	2	21.5	21.5	21.3	1	17.9	18.5	18.4
			50	24	2	21.5	21.5	21.4	1	18.1	18.7	18.0
			50	50	2	21.5	21.4	21.3	1	18.3	18.6	17.8
			100	0	2	21.4	21.4	21.5	1	18.0	18.6	18.0

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1717.5 MHz	1732.5 MHz	1747.5 MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	22.0	22.1	21.9	0	19.1	19.4	19.2
			1	37	0	22.1	22.1	21.9	0	19.6	20.3	19.5
			1	74	0	22.0	22.2	21.9	0	19.2	18.9	18.9
			36	0	1	21.5	21.4	21.5	1	18.4	19.1	18.5
			36	20	1	21.4	21.5	21.5	1	18.3	19.2	18.3
			36	39	1	21.4	21.4	21.6	1	18.4	19.1	18.3
		16QAM	75	0	1	21.4	21.4	21.5	1	18.6	19.1	18.6
			1	0	1	21.1	22.3	22.1	0	18.6	19.3	19.3
			1	37	1	21.3	22.4	22.1	0	19.1	20.2	19.6
			1	74	1	21.2	22.4	22.2	0	18.7	18.9	18.8
			36	0	2	21.2	21.3	21.3	1	17.8	18.6	18.0
			36	20	2	21.2	21.3	21.1	1	17.9	18.8	17.9
			36	39	2	21.3	21.2	21.3	1	18.0	18.7	17.8
			75	0	2	21.2	21.3	21.3	1	18.0	18.6	18.0

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1715 MHz	1732.5 MHz	1750 MHz		1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	21.9	22.1	22.2	0	19.3	19.8	19.0
			1	25	0	22.1	22.1	22.3	0	19.4	20.2	19.5
			1	49	0	22.0	22.1	22.3	0	19.2	19.7	19.2
			25	0	1	21.4	21.3	21.4	1	18.4	19.2	18.3
			25	12	1	21.5	21.5	21.6	1	18.4	19.2	18.3
			25	25	1	21.4	21.4	21.6	1	18.6	19.3	18.3
		16QAM	50	0	1	21.5	21.4	21.6	1	18.5	19.3	18.3
			1	0	1	21.2	21.5	22.5	0	19.3	19.4	18.7
			1	25	1	21.3	21.5	22.5	0	19.4	19.8	18.8
			1	49	1	21.3	21.4	22.5	0	19.0	19.5	18.5
			25	0	2	21.3	21.2	21.2	1	17.9	18.8	18.0
			25	12	2	21.3	21.2	21.3	1	18.0	18.8	18.0
			25	25	2	21.3	21.2	21.4	1	18.1	18.8	18.0
			50	0	2	21.3	21.2	21.4	1	18.0	18.8	18.0

LTE Band 4 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1712.5 MHz	1732.5 MHz	1752.5 MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	22.0	22.3	22.3	0	19.3	19.9	19.2
			1	12	0	22.1	22.4	22.2	0	19.6	20.2	19.4
			1	24	0	22.1	22.3	22.3	0	19.0	19.8	19.2
			12	0	1	21.3	21.4	21.6	1	18.6	19.1	18.3
			12	7	1	21.3	21.5	21.6	1	18.3	19.2	18.3
			12	13	1	21.4	21.5	21.6	1	18.2	19.1	18.2
			25	0	1	21.4	21.5	21.5	1	18.6	19.1	18.2
		16QAM	1	0	1	21.0	21.9	22.4	0	19.0	19.8	19.4
			1	12	1	21.1	22.0	22.4	0	19.3	20.0	19.6
			1	24	1	21.2	21.9	22.4	0	18.6	19.8	19.4
			12	0	2	21.1	21.3	21.4	1	18.0	18.7	17.8
			12	7	2	21.2	21.4	21.4	1	17.8	18.8	18.0
			12	13	2	21.3	21.4	21.4	1	17.7	18.7	17.9
			25	0	2	21.3	21.2	21.2	1	18.1	18.6	17.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	21.9	22.0	22.3	0	19.8	20.5	19.8
			1	8	0	22.1	22.1	22.2	0	19.6	20.2	19.5
			1	14	0	22.2	22.2	22.2	0	19.6	20.5	19.9
			8	0	1	21.3	21.4	21.6	1	19.0	19.4	18.5
			8	4	1	21.3	21.5	21.6	1	19.0	19.4	18.5
			8	7	1	21.4	21.4	21.6	1	19.0	19.4	18.6
			15	0	1	21.4	21.5	21.6	1	19.0	19.4	18.6
		16QAM	1	0	1	21.3	22.3	21.4	0	19.6	20.5	19.3
			1	8	1	21.4	22.2	21.4	0	19.3	20.2	19.0
			1	14	1	21.7	22.1	21.3	0	19.1	20.5	19.3
			8	0	2	21.2	21.2	21.5	1	18.4	19.0	18.1
			8	4	2	21.2	21.3	21.4	1	18.5	19.0	18.2
			8	7	2	21.2	21.3	21.5	1	18.5	19.0	18.2
			15	0	2	21.3	21.4	21.4	1	18.4	18.9	18.1
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						1710.7 MHz	1732.5 MHz	1754.3 MHz		1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	22.0	22.1	22.3	0	19.8	20.3	19.7
			1	3	0	21.9	22.1	22.3	0	19.8	20.3	19.7
			1	5	0	22.1	22.2	22.2	0	19.8	20.2	19.7
			3	0	0	22.0	22.1	22.3	0	19.7	20.3	19.7
			3	1	0	22.0	22.1	22.3	0	19.7	20.3	19.7
			3	3	0	22.0	22.1	22.3	0	19.7	20.3	19.7
			6	0	1	21.4	21.5	21.6	1	18.9	19.3	18.5
		16QAM	1	0	1	21.8	22.2	21.4	0	19.5	20.2	19.1
			1	3	1	21.8	22.2	21.4	0	19.5	20.2	19.1
			1	5	1	21.9	22.2	21.4	0	19.6	20.2	19.1
			3	0	1	21.9	22.1	22.0	0	19.5	20.0	19.2
			3	1	1	21.9	22.1	21.9	0	19.5	20.0	19.2
			3	3	1	21.9	22.1	21.9	0	19.4	20.0	19.3
			6	0	2	21.3	21.3	21.4	1	18.5	18.7	18.3

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	23.1	22.9	22.6
			1	25	0	23.2	22.8	23.1
			1	49	0	23.0	23.2	22.8
			25	0	1	21.7	21.4	21.7
			25	12	1	21.9	21.2	21.8
			25	25	1	21.5	21.1	21.9
			50	0	1	21.8	21.2	21.8
		16QAM	1	0	1	21.7	21.9	21.1
			1	25	1	21.9	21.7	21.6
			1	49	1	21.5	22.2	21.3
			25	0	2	21.0	20.5	21.1
			25	12	2	21.2	20.3	21.2
			25	25	2	20.7	20.2	21.1
			50	0	2	21.2	20.4	21.2
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	22.9	22.7	23.4
			1	12	0	22.8	22.6	22.8
			1	24	0	23.0	22.5	23.1
			12	0	1	21.7	21.3	21.7
			12	6	1	21.7	21.2	21.4
			12	11	1	21.7	21.2	21.3
			25	0	1	21.7	21.3	21.4
		16QAM	1	0	1	22.2	21.8	22.3
			1	12	1	22.2	21.6	21.9
			1	24	1	22.4	21.5	21.9
			12	0	2	20.9	20.7	21.1
			12	6	2	20.9	20.6	20.6
			12	11	2	20.9	20.5	20.6
			25	0	2	20.9	20.6	20.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	23.0	22.9	23.1
			1	8	0	23.1	22.8	23.1
			1	14	0	23.2	22.7	23.1
			8	0	1	21.8	21.4	21.5
			8	4	1	21.8	21.4	21.5
			8	7	1	21.9	21.4	21.5
			15	0	1	21.8	21.4	21.5
		16QAM	1	0	1	21.7	21.8	21.5
			1	8	1	21.8	21.5	21.4
			1	14	1	21.8	21.7	21.3
			8	0	2	21.1	20.6	21.2
			8	4	2	21.1	20.4	21.1
			8	7	2	21.1	20.4	21.1
			15	0	2	21.2	20.6	20.8

LTE Band 5 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	23.0	22.9	22.9
			1	3	0	23.1	22.9	22.9
			1	5	0	23.1	22.6	22.9
			3	0	0	23.0	22.7	22.9
			3	1	0	23.0	22.7	22.9
			3	3	0	22.9	22.8	22.8
			6	0	1	21.9	21.3	21.5
		16QAM	1	0	1	22.2	21.7	21.9
			1	3	1	22.2	21.6	21.8
			1	5	1	22.2	21.5	21.9
			3	0	1	22.1	22.0	21.9
			3	1	1	22.1	22.0	21.9
			3	3	1	22.0	22.0	21.9
			6	0	2	21.1	20.5	21.0

LTE Band 17 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)
						710 MHz
LTE Band 17	10	QPSK	1	0	0	22.6
			1	25	0	22.4
			1	49	0	22.6
			25	0	1	21.0
			25	12	1	21.0
			25	25	1	21.0
			50	0	1	21.0
		16QAM	1	0	1	21.7
			1	25	1	21.7
			1	49	1	21.8
			25	0	2	20.2
			25	12	2	20.2
			25	25	2	20.2
			50	0	2	20.2
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)
						710 MHz
LTE Band 17	5	QPSK	1	0	0	22.5
			1	12	0	22.5
			1	24	0	22.6
			12	0	1	21.0
			12	6	1	21.0
			12	11	1	21.0
			25	0	1	21.0
		16QAM	1	0	1	21.2
			1	12	1	21.1
			1	24	1	21.4
			12	0	2	20.2
			12	6	2	20.2
			12	11	2	20.3
			25	0	2	20.3

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

9.4. Wi-Fi 2.4GHz (DTS Band)

Measured Results

Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Note(s)
802.11b	1 Mbps	1	2412	16.1	16.5	Yes	
		6	2437	16.1			
		11	2462	15.7			
802.11g	6 Mbps	1	2412	Not Require	14.5	No	1
		6	2437				
		11	2462				
802.11n (HT20)	6.5 Mbps	1	2412	Not Require	14.5	No	1
		6	2437				
		11	2462				

Note(s):

- Output Power and SAR is not required for 802.11g/n HT20 channels when the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

9.5. Bluetooth

Maximum tune-up tolerance limit is 10.5 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Additional 1-g SAR testing at 5 mm is not required. For hotspot mode, 10-g extremity SAR is not required for the surfaces and edges since all 1-g reported SAR < 1.2 W/kg. **(for Phablet only)**

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM850

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	Off	0	Left Touch	128	824.2	33.0	32.5	0.907	1.025	1
					190	836.6	33.0	32.6	0.883	0.971	
					251	848.8	33.0	32.6	0.812	0.883	
				Left Tilt	190	836.6	33.0	32.6	0.512	0.563	
					128	824.2	33.0	32.5	0.859	0.971	
				Right Touch	190	836.6	33.0	32.6	0.805	0.885	
					251	848.8	33.0	32.6	0.744	0.809	
					190	836.6	33.0	32.6	0.494	0.543	
				Head VoIP	GPRS 1 Slots	Off	0	Left Touch	128	824.2	
190	836.6	33.0	32.6						0.797	0.876	
251	848.8	33.0	32.6						0.748	0.814	
Left Tilt	190	836.6	33.0					32.6	0.472	0.519	
	128	824.2	33.0					32.5	0.791	0.893	
Right Touch	190	836.6	33.0					32.6	0.730	0.803	
	251	848.8	33.0					32.6	0.684	0.745	
	190	836.6	33.0					32.6	0.468	0.515	
Body-worn	Voice	Off	15					Rear	128	824.2	33.0
				190	836.6	33.0	32.6		0.789	0.867	
				251	848.8	33.0	32.6		0.731	0.795	
				Front	128	824.2	33.0	32.5	0.798	0.902	
					190	836.6	33.0	32.6	0.743	0.817	
					251	848.8	33.0	32.6	0.668	0.727	
Body-worn (VoIP)	GPRS 1 Slots	Off	15	Rear	128	824.2	33.0	32.5	0.761	0.859	
					190	836.6	33.0	32.6	0.758	0.834	
					251	848.8	33.0	32.6	0.700	0.762	
Hotspot	GPRS 1 Slots	Off	10	Rear	128	824.2	33.0	32.5	0.964	1.088	3
					190	836.6	33.0	32.6	0.948	1.043	
					251	848.8	33.0	32.6	0.857	0.933	
				Front	128	824.2	33.0	32.5	0.862	0.973	
					190	836.6	33.0	32.6	0.815	0.897	
					251	848.8	33.0	32.6	0.731	0.796	
				Edge 2	190	836.6	33.0	32.6	0.604	0.664	
				Edge 3	190	836.6	33.0	32.6	0.129	0.142	
				Edge 4	190	836.6	33.0	32.6	0.632	0.695	

10.2. GSM1900

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	Off	0	Left Touch	661	1880.0	30.0	29.5	0.375	0.422	
				Left Tilt	661	1880.0	30.0	29.5	0.268	0.302	
				Right Touch	661	1880.0	30.0	29.5	0.700	0.788	
				Right Tilt	661	1880.0	30.0	29.5	0.236	0.266	
Head VoIP	GPRS 3 Slots	Off	0	Left Touch	661	1880.0	26.0	25.1	0.364	0.452	
				Left Tilt	661	1880.0	26.0	25.1	0.264	0.327	
				Right Touch	512	1850.2	26.0	25.0	0.691	0.870	4
					661	1880.0	26.0	25.1	0.670	0.832	
					810	1909.8	26.0	25.2	0.675	0.819	
				Right Tilt	661	1880.0	26.0	25.1	0.234	0.290	
Body-worn	Voice	Off	15	Rear	661	1880.0	30.0	29.5	0.434	0.488	
Body-worn (VoIP)	GPRS 3 Slots			Front	661	1880.0	30.0	29.5	0.386	0.434	
Body-worn (VoIP)	GPRS 3 Slots	Off	15	Rear	661	1880.0	26.0	25.1	0.447	0.555	5
				Front	661	1880.0	26.0	25.1	0.372	0.462	
Hotspot	GPRS 3 Slots	Off	10	Rear	512	1850.2	26.0	25.0	0.857	1.079	6
					661	1880.0	26.0	25.1	0.850	1.055	
					810	1909.8	26.0	25.2	0.847	1.027	
				Front	661	1880.0	26.0	25.1	0.611	0.758	
				Edge 2	661	1880.0	26.0	25.1	0.298	0.370	
				Edge 3	661	1880.0	26.0	25.1	0.203	0.252	
				Edge 4	661	1880.0	26.0	25.1	0.080	0.099	

10.3. W-CDMA Band II

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	On	0	Left Touch	9400	1880.0	22.0	21.4	0.362	0.412	7
				Left Tilt	9400	1880.0	22.0	21.4	0.293	0.333	
				Right Touch	9400	1880.0	22.0	21.4	0.554	0.630	
				Right Tilt	9400	1880.0	22.0	21.4	0.219	0.249	
Body-worn	Rel 99 RMC	Off	15	Rear	9400	1880.0	23.0	22.5	0.438	0.496	8
				Front	9400	1880.0	23.0	22.5	0.356	0.403	
Hotspot	Rel 99 RMC	Off	10	Rear	9262	1852.4	23.0	22.9	0.827	0.852	9
					9400	1880.0	23.0	22.5	0.747	0.846	
					9538	1907.6	23.0	22.5	0.735	0.824	
				Front	9400	1880.0	23.0	22.5	0.668	0.757	
				Edge 2	9400	1880.0	23.0	22.5	0.236	0.267	
				Edge 3	9400	1880.0	23.0	22.5	0.176	0.199	
				Edge 4	9400	1880.0	23.0	22.5	0.093	0.106	

10.4. W-CDMA Band IV

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	Off	0	Left Touch	1413	1732.6	22.5	22.1	0.431	0.478	10
				Left Tilt	1413	1732.6	22.5	22.1	0.194	0.215	
				Right Touch	1312	1712.4	22.5	22.0	0.759	0.854	
					1413	1732.6	22.5	22.1	0.784	0.869	
				Right Tilt	1413	1732.6	22.5	22.1	0.199	0.221	
Body-worn	Rel 99 RMC	Off	15	Rear	1413	1732.6	22.5	22.1	0.474	0.525	11
				Front	1413	1732.6	22.5	22.1	0.419	0.464	
Hotspot	Rel 99 RMC	On	10	Rear	1413	1732.6	20.5	19.5	0.568	0.713	12
				Front	1413	1732.6	20.5	19.5	0.456	0.573	
				Edge 2	1413	1732.6	20.5	19.5	0.197	0.247	
				Edge 3	1413	1732.6	20.5	19.5	0.133	0.167	
				Edge 4	1413	1732.6	20.5	19.5	0.048	0.060	

10.5. W-CDMA Band V

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	Off	0	Left Touch	4183	836.6	23.0	22.7	0.689	0.739	13
				Left Tilt	4183	836.6	23.0	22.7	0.411	0.441	
				Right Touch	4183	836.6	23.0	22.7	0.665	0.713	
				Right Tilt	4183	836.6	23.0	22.7	0.470	0.504	
Body-worn	Rel 99 RMC	Off	15	Rear	4183	836.6	23.0	22.7	0.744	0.798	14
				Front	4183	836.6	23.0	22.7	0.665	0.713	
Hotspot	Rel 99 RMC	Off	10	Rear	4132	826.4	23.0	22.7	0.944	1.012	15
					4183	836.6	23.0	22.7	0.943	1.012	
					4233	846.6	23.0	22.7	0.916	0.984	
				Front	4132	826.4	23.0	22.7	0.785	0.842	
					4183	836.6	23.0	22.7	0.793	0.851	
					4233	846.6	23.0	22.7	0.768	0.825	
				Edge 2	4183	836.6	23.0	22.7	0.527	0.565	
				Edge 3	4183	836.6	23.0	22.7	0.109	0.117	
Edge 4	4183	836.6	23.0	22.7	0.562	0.603					

10.6. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.		
									Tune-up limit	Meas.	Meas.	Scaled			
Head	QPSK	On	0	Left Touch	18900	1880.0	1	0	23.0	22.6	0.436	0.478			
							50	0	22.0	21.4	0.333	0.379			
				Left Tilt	18900	1880.0	1	0	23.0	22.6	0.297	0.326			
							50	0	22.0	21.4	0.234	0.266			
				Right Touch	18900	1880.0	1	0	23.0	22.6	0.693	0.760	16		
							50	0	22.0	21.4	0.547	0.622			
				Right Tilt	18900	1880.0	1	0	23.0	22.6	0.257	0.282			
							50	0	22.0	21.4	0.205	0.233			
Body-Worn	QPSK	Off	15	Rear	18900	1880.0	1	0	23.5	23.2	0.477	0.509	17		
							50	0	22.5	22.0	0.359	0.399			
				Front	18900	1880.0	1	0	23.5	23.2	0.427	0.456			
							50	0	22.5	22.0	0.314	0.349			
Hotspot	QPSK	Off	10	Rear	18700	1860.0	1	0	23.5	23.4	0.981	0.997	18		
							18900	1880.0	1	0	23.5	23.2		0.904	0.965
									50	0	22.5	22.0		0.676	0.752
				Front	18700	1860.0	1	0	23.5	23.4	0.823	0.836			
							18900	1880.0	1	0	23.5	23.2		0.786	0.839
									50	0	22.5	22.0		0.603	0.670
				Edge 2	18900	1880.0	1	0	23.5	23.2	0.287	0.306			
							50	0	22.5	22.0	0.214	0.238			
														1	0
				Edge 3	18900	1880.0	1	0	23.5	23.2	0.152	0.169			
							50	0	22.5	22.0	0.123	0.131			
														1	0
				Edge 4	18900	1880.0	1	0	23.5	23.2	0.123	0.131			
							50	0	22.5	22.0	0.090	0.100			

10.7. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.				
									Tune-up limit	Meas.	Meas.	Scaled					
Head	QPSK	Off	0	Left Touch	20175	1732.5	1	99	23.5	22.5	0.477	0.595					
							50	24	22.5	21.7	0.419	0.505					
				Left Tilt	20175	1732.5	1	99	23.5	22.5	0.229	0.286					
							50	24	22.5	21.7	0.200	0.241					
				Right Touch	20050	1720.0	1	99	23.5	22.5	0.853	1.064					
							50	24	22.5	21.8	0.792	0.924					
							100	0	22.5	21.8	0.837	0.974					
					20175	1732.5	1	99	23.5	22.5	0.867	1.081	19				
				Right Tilt	20175	1732.5	50	24	22.5	21.7	0.764	0.921					
							20300	1745.0	1	99	23.5	22.5	0.831	1.037			
											50	24	22.5	21.7	0.765	0.920	
											1	99	23.5	22.5	0.202	0.252	
							50	24	22.5	21.7	0.172	0.207					
Body-Worn	QPSK	Off	15	Rear	20175	1732.5	1	99	23.5	22.5	0.564	0.704	20				
							50	24	22.5	21.7	0.478	0.576					
				Front	20175	1732.5	1	99	23.5	22.5	0.450	0.561					
							50	24	22.5	21.7	0.401	0.483					
Hotspot	QPSK	On	10	Rear	20175	1732.5	1	49	20.5	20.3	0.549	0.580	21				
							50	24	19.5	19.2	0.432	0.463					
				Front	20175	1732.5	1	49	20.5	20.3	0.390	0.412					
							50	24	19.5	19.2	0.306	0.328					
				Edge 2	20175	1732.5	1	49	20.5	20.3	0.225	0.238					
							50	24	19.5	19.2	0.176	0.189					
				Edge 3	20175	1732.5	1	49	20.5	20.3	0.182	0.192					
							50	24	19.5	19.2	0.143	0.153					
Edge 4	20175	1732.5	1	49	20.5	20.3	0.062	0.065									
			50	24	19.5	19.2	0.048	0.052									

10.8. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	Off	0	Left Touch	20450	829.0	1	49	23.5	23.0	0.714	0.808	22
					20525	836.5	1	49	23.5	23.2	0.826	0.894	
					20600	844.0	25	0	22.5	21.4	0.523	0.672	
				Left Tilt	20525	836.5	1	49	23.5	23.2	0.499	0.540	
					20525	836.5	25	0	22.5	21.4	0.311	0.399	
					20600	844.0	1	49	23.5	22.8	0.780	0.920	
				Right Touch	20450	829.0	1	49	23.5	23.0	0.709	0.802	
					20525	836.5	1	49	23.5	23.2	0.773	0.836	
					20525	836.5	25	0	22.5	21.4	0.501	0.643	
				Right Tilt	20600	844.0	1	49	23.5	22.8	0.678	0.799	
					20525	836.5	1	49	23.5	23.2	0.481	0.520	
					20525	836.5	25	0	22.5	21.4	0.304	0.390	
Body-worn	QPSK	Off	15	Rear	20450	829.0	1	49	23.5	23.0	0.801	0.906	23
					20525	836.5	1	49	23.5	23.2	0.828	0.896	
					20525	836.5	25	0	22.5	21.4	0.569	0.731	
				Front	20600	844.0	1	49	23.5	22.8	0.773	0.911	
					20525	836.5	1	49	23.5	23.2	0.699	0.756	
					20525	836.5	25	0	22.5	21.4	0.498	0.639	
Hotspot	QPSK	Off	10	Rear	20450	829.0	1	49	23.5	23.0	0.951	1.076	24
					20450	829.0	25	0	22.5	21.7	0.739	0.888	
					20525	836.5	1	49	23.5	23.2	0.984	1.065	
					20525	836.5	25	0	22.5	21.4	0.690	0.886	
					20600	844.0	50	0	22.5	21.2	0.629	0.852	
					20600	844.0	1	49	23.5	22.8	0.853	1.006	
				Front	20525	836.5	25	0	22.5	21.7	0.742	0.889	
					20450	829.0	1	49	23.5	23.0	0.825	0.934	
					20525	836.5	1	49	23.5	23.2	0.865	0.936	
				Edge 2	20525	836.5	25	0	22.5	21.4	0.582	0.747	
					20600	844.0	1	49	23.5	22.8	0.783	0.923	
					20525	836.5	1	49	23.5	23.2	0.571	0.618	
				Edge 3	20525	836.5	25	0	22.5	21.4	0.400	0.514	
					20525	836.5	1	49	23.5	23.2	0.137	0.148	
					20525	836.5	25	0	22.5	21.4	0.082	0.105	
				Edge 4	20525	836.5	1	49	23.5	23.2	0.637	0.689	
					20525	836.5	25	0	22.5	21.4	0.436	0.560	
					20525	836.5	1	49	23.5	23.2	0.637	0.689	

10.9. LTE Band 17 (10MHz Bandwidth)

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	Off	0	Left Touch	23790	710.0	1	49	23.5	22.6	0.231	0.285	25
							25	0	22.5	21.0	0.155	0.217	
				Left Tilt	23790	710.0	1	49	23.5	22.6	0.112	0.138	
							25	0	22.5	21.0	0.088	0.123	
				Right Touch	23790	710.0	1	49	23.5	22.6	0.211	0.260	
							25	0	22.5	21.0	0.154	0.216	
				Right Tilt	23790	710.0	1	49	23.5	22.6	0.140	0.172	
							25	0	22.5	21.0	0.091	0.127	
Body-Worn	QPSK	Off	15	Rear	23790	710.0	1	49	23.5	22.6	0.275	0.339	26
							25	0	22.5	21.0	0.204	0.286	
				Front	23790	710.0	1	49	23.5	22.6	0.211	0.260	
							25	0	22.5	21.0	0.155	0.217	
Hotspot	QPSK	Off	10	Rear	23790	710.0	1	49	23.5	22.6	0.413	0.509	27
							25	0	22.5	21.0	0.292	0.409	
				Front	23790	710.0	1	49	23.5	22.6	0.292	0.360	
							25	0	22.5	21.0	0.216	0.303	
				Edge 2	23790	710.0	1	49	23.5	22.6	0.152	0.187	
							25	0	22.5	21.0	0.096	0.134	
				Edge 3	23790	710.0	1	49	23.5	22.6	0.033	0.040	
							25	0	22.5	21.0	0.021	0.030	
				Edge 4	23790	710.0	1	49	23.5	22.6	0.148	0.182	
							25	0	22.5	21.0	0.111	0.156	

10.10. Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	Head	0	Left Touch	1	2412	0.479	16.5	16.1	0.336	0.365	
				Left Tilt	1	2412	0.321	16.5	16.1			
				Right Touch	1	2412	1.095	16.5	16.1	0.752	0.817	
					6	2437	0.642	16.5	16.1	0.443	0.487	
				Right Tilt	1	2412	0.747	16.5	16.1	0.472	0.513	
		Body-worn & Hotspot & Wi-Fi Direct	10	Rear	1	2412	0.114	16.5	16.1			
				Front	1	2412	0.174	16.5	16.1	0.133	0.144	
				Edge 1	1	2412	0.111	16.5	16.1			
				Edge 2	1	2412	0.111	16.5	16.1			
				Edge 4	1	2412	0.122	16.5	16.1			

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
- Testing for a second channel was required because the reported SAR for this test position was >0.8 W/kg.
- Additional testing required in order satisfying FCC simultaneous transmission limit criteria.
- SAR data of Wi-Fi (DTS Band) used in this report were taken from SAR report 15K22514-S1V3, submitted under FCC ID A3LSMJ111F. Both models share identical antennas and output power. Spot checks were performed on model SM-J111M/DS and SM-J111M to ensure SAR values were the same between both models.

10.11. Bluetooth

Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{(\text{GHz})}/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	SAR test exclusion Result*	Test Configuration	Estimated 1-g SAR (W/kg)
(dBm)	(mW)					
10.5	11	10	2.480	1.7	Rear/Front	0.231

Conclusion:

*: The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 or 2.0 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 or 2.0 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
750	LTE Band 17	Hotspot	Rear	No	0.413	N/A	N/A
850	GSM 850	Hotspot	Rear	No	0.964	N/A	N/A
	WCDMA Band V	Hotspot	Rear	No	0.944	N/A	N/A
	LTE Band 5	Hotspot	Rear	Yes	0.984	1.01	1.03
1750	WCDMA Band IV	Head	Right Touch	No	0.806	N/A	N/A
	LTE Band 4	Head	Right Touch	Yes	0.867	0.873	1.01
1900	GSM 1900	Hotspot	Rear	No	0.857	N/A	N/A
	WCDMA Band II	Hotspot	Rear	No	0.827	N/A	N/A
	LTE Band 2	Hotspot	Rear	Yes	0.981	0.924	1.06
2400	Wi-Fi 802.11b/g/n	Head	Right Touch	No	0.752	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations	
Head	1	GSM(Voice)	+ DTS
	2	GSM(GPRS)	+ DTS
	3	W-CDMA	+ DTS
	4	LTE	+ DTS
Body-worn	5	GSM(Voice)	+ DTS
	6	GSM(Voice)	+ BT
	7	GSM(GPRS)	+ DTS
	8	GSM(GPRS)	+ BT
	9	W-CDMA	+ DTS
	10	W-CDMA	+ BT
	11	LTE	+ DTS
	12	LTE	+ BT
Hotspot & Wi-Fi Direct	13	GSM(GPRS)	+ DTS
	14	W-CDMA	+ DTS
	15	LTE	+ DTS

Notes:

1. DTS supports Hotspot and Wi-Fi Direct.
2. GPRS, W-CDMA and LTE support Hotspot.
3. VoIP is supported in GPRS, W-CDMA, LTE
4. DTS Radio cannot transmit simultaneously with Bluetooth Radio.

12.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	1.025	0.365		1.390	No		
	Left Tilt	0.563	0.817		1.380	No		
	Right Touch	0.971	0.817		1.788	Yes		
	Right Tilt	0.543	0.513		1.056	No		
Body-worn & Hotspot	Rear	0.913	0.144	0.231	1.057	No	1.144	No
	Front	0.902	0.144	0.231	1.046	No	1.133	No
Hotspot	Rear	1.088	0.144		1.232	No		
	Front	0.973	0.144		1.117	No		
	Edge 1	1.088	0.144		1.232	No		
	Edge 2	0.664	0.144		0.808	No		
	Edge 3	0.142	0.144		0.286	No		
	Edge 4	0.695	0.144		0.839	No		

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination		∑ 1-g SAR (mW/g)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	② DTS					
Right Touch	0.971	0.817	① + ② 1.788	72.1	0.033	No	1

12.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.452	0.365		0.817	No		
	Left Tilt	0.327	0.817		1.144	No		
	Right Touch	0.870	0.817		1.687	Yes		
	Right Tilt	0.290	0.513		0.803	No		
Body-worn & Hotspot	Rear	0.555	0.144	0.231	0.699	No	0.786	No
	Front	0.462	0.144	0.231	0.606	No	0.693	No
Hotspot	Rear	1.079	0.144		1.223	No		
	Front	0.758	0.144		0.902	No		
	Edge 1	1.079	0.144		1.223	No		
	Edge 2	0.370	0.144		0.514	No		
	Edge 3	0.252	0.144		0.396	No		
	Edge 4	0.099	0.144		0.243	No		

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination		∑ 1-g SAR (mW/g)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	② DTS					
Right Touch	0.870	0.817	① + ② 1.687	86.2	0.025	No	2

12.3. Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.412	0.365		0.777	No		
	Left Tilt	0.333	0.817		1.150	No		
	Right Touch	0.630	0.817		1.447	No		
	Right Tilt	0.249	0.513		0.762	No		
Body-worn & Hotspot	Rear	0.496	0.144	0.231	0.640	No	0.727	No
	Front	0.403	0.144	0.231	0.547	No	0.634	No
Hotspot	Rear	0.852	0.144		0.996	No		
	Front	0.757	0.144		0.901	No		
	Edge 1	0.852	0.144		0.996	No		
	Edge 2	0.267	0.144		0.411	No		
	Edge 3	0.199	0.144		0.343	No		
	Edge 4	0.106	0.144		0.250	No		

12.4. Sum of the SAR for WCDMA Band IV & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.478	0.365		0.843	No		
	Left Tilt	0.215	0.817		1.032	No		
	Right Touch	0.869	0.817		1.686	Yes		
	Right Tilt	0.221	0.513		0.734	No		
Body-worn & Hotspot	Rear	0.525	0.144	0.231	0.669	No	0.756	No
	Front	0.464	0.144	0.231	0.608	No	0.695	No
Hotspot	Rear	0.713	0.144		0.857	No		
	Front	0.573	0.144		0.717	No		
	Edge 1	0.713	0.144		0.857	No		
	Edge 2	0.247	0.144		0.391	No		
	Edge 3	0.167	0.144		0.311	No		
	Edge 4	0.060	0.144		0.204	No		

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination		∑ 1-g SAR (mW/g)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	② DTS					
Right Touch	0.869	0.817	① + ② 1.686	88.2	0.025	No	3

12.5. Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.739	0.365		1.104	No		
	Left Tilt	0.441	0.817		1.258	No		
	Right Touch	0.713	0.817		1.530	No		
	Right Tilt	0.504	0.513		1.017	No		
Body-worn & Hotspot	Rear	0.798	0.144	0.231	0.942	No	1.029	No
	Front	0.713	0.144	0.231	0.857	No	0.944	No
Hotspot	Rear	1.012	0.144		1.156	No		
	Front	0.851	0.144		0.995	No		
	Edge 1	1.012	0.144		1.156	No		
	Edge 2	0.565	0.144		0.709	No		
	Edge 3	0.117	0.144		0.261	No		
	Edge 4	0.603	0.144		0.747	No		

12.6. Sum of the SAR for LTE Band 2 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.478	0.365		0.843	No		
	Left Tilt	0.326	0.817		1.143	No		
	Right Touch	0.760	0.817		1.577	No		
	Right Tilt	0.282	0.513		0.795	No		
Body-worn & Hotspot	Rear	0.509	0.144	0.231	0.653	No	0.740	No
	Front	0.456	0.144	0.231	0.600	No	0.687	No
Hotspot	Rear	0.997	0.144		1.141	No		
	Front	0.894	0.144		1.038	No		
	Edge 1	0.997	0.144		1.141	No		
	Edge 2	0.306	0.144		0.450	No		
	Edge 3	0.206	0.144		0.350	No		
	Edge 4	0.131	0.144		0.275	No		

12.7. Sum of the SAR for LTE Band 4 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.595	0.365		0.960	No		
	Left Tilt	0.286	0.817		1.103	No		
	Right Touch	1.081	0.817		1.898	Yes		
	Right Tilt	0.252	0.513		0.765	No		
Body-worn & Hotspot	Rear	0.704	0.144	0.231	0.848	No	0.935	No
	Front	0.561	0.144	0.231	0.705	No	0.792	No
Hotspot	Rear	0.580	0.144		0.724	No		
	Front	0.412	0.144		0.556	No		
	Edge 1	0.580	0.144		0.724	No		
	Edge 2	0.238	0.144		0.382	No		
	Edge 3	0.192	0.144		0.336	No		
	Edge 4	0.065	0.144		0.209	No		

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination		∑ 1-g SAR (mW/g)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	② DTS					
Right Touch	1.081	0.817	① + ② 1.898	87.4	0.030	No	4

12.8. Sum of the SAR for LTE Band 5 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.920	0.365		1.285	No		
	Left Tilt	0.540	0.817		1.357	No		
	Right Touch	0.836	0.817		1.653	Yes		
	Right Tilt	0.520	0.513		1.033	No		
Body-worn & Hotspot	Rear	0.911	0.144	0.231	1.055	No	1.142	No
	Front	0.756	0.144	0.231	0.900	No	0.987	No
Hotspot	Rear	1.076	0.144		1.220	No		
	Front	0.936	0.144		1.080	No		
	Edge 1	1.076	0.144		1.220	No		
	Edge 2	0.618	0.144		0.762	No		
	Edge 3	0.148	0.144		0.292	No		
	Edge 4	0.689	0.144		0.833	No		

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination		∑ 1-g SAR (mW/g)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure
	① WWAN	② DTS					
Right Touch	0.836	0.817	① + ② 1.653	72.0	0.030	No	5

12.9. Sum of the SAR for LTE Band 17 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ BT	① + ② WWAN + DTS		① + ③ WWAN + BT	
					∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.285	0.365		0.650	No		
	Left Tilt	0.138	0.817		0.955	No		
	Right Touch	0.260	0.817		1.077	No		
	Right Tilt	0.172	0.513		0.685	No		
Body-worn & Hotspot	Rear	0.339	0.144	0.231	0.483	No	0.570	No
	Front	0.260	0.144	0.231	0.404	No	0.491	No
Hotspot	Rear	0.509	0.144		0.653	No		
	Front	0.360	0.144		0.504	No		
	Edge 1	0.509	0.144		0.653	No		
	Edge 2	0.187	0.144		0.331	No		
	Edge 3	0.040	0.144		0.184	No		
	Edge 4	0.182	0.144		0.326	No		

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

Figure (1)

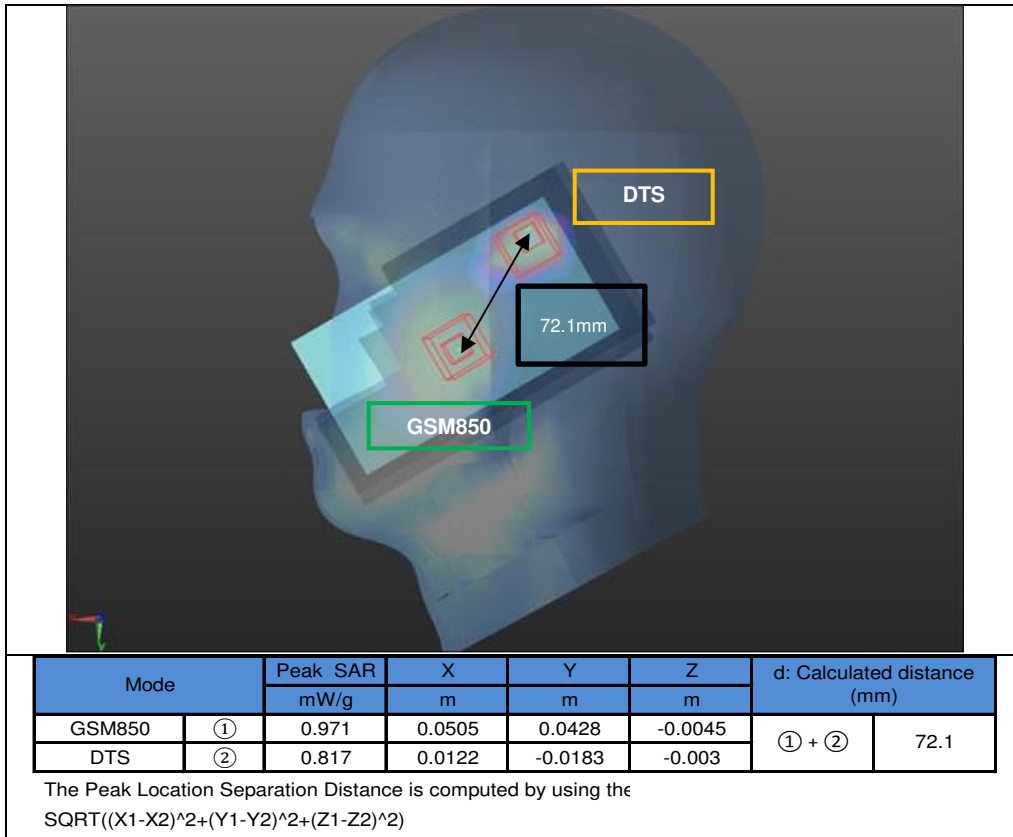


Figure (2)

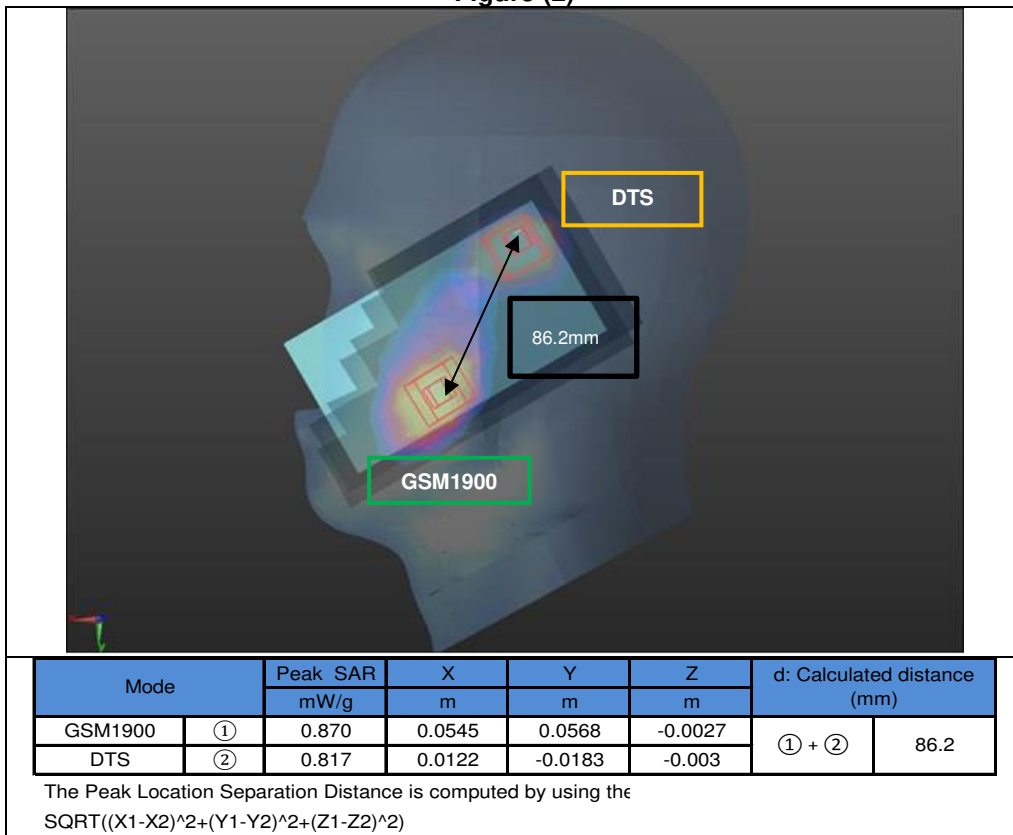


Figure (3)

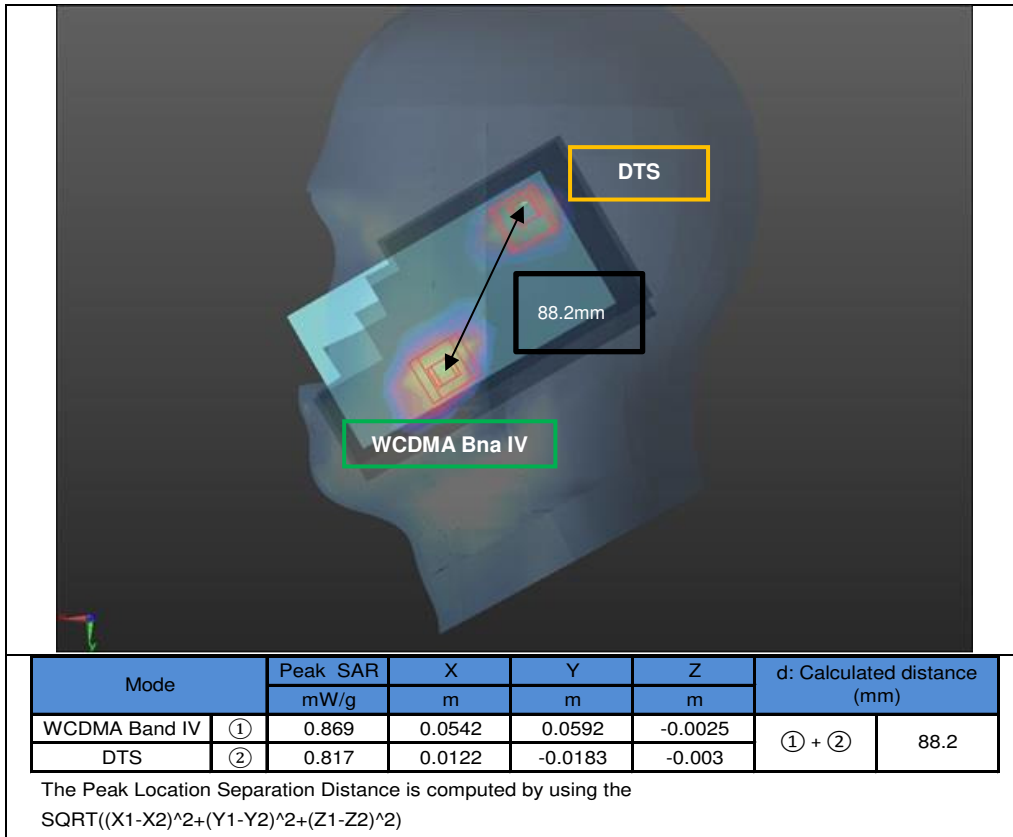


Figure (4)


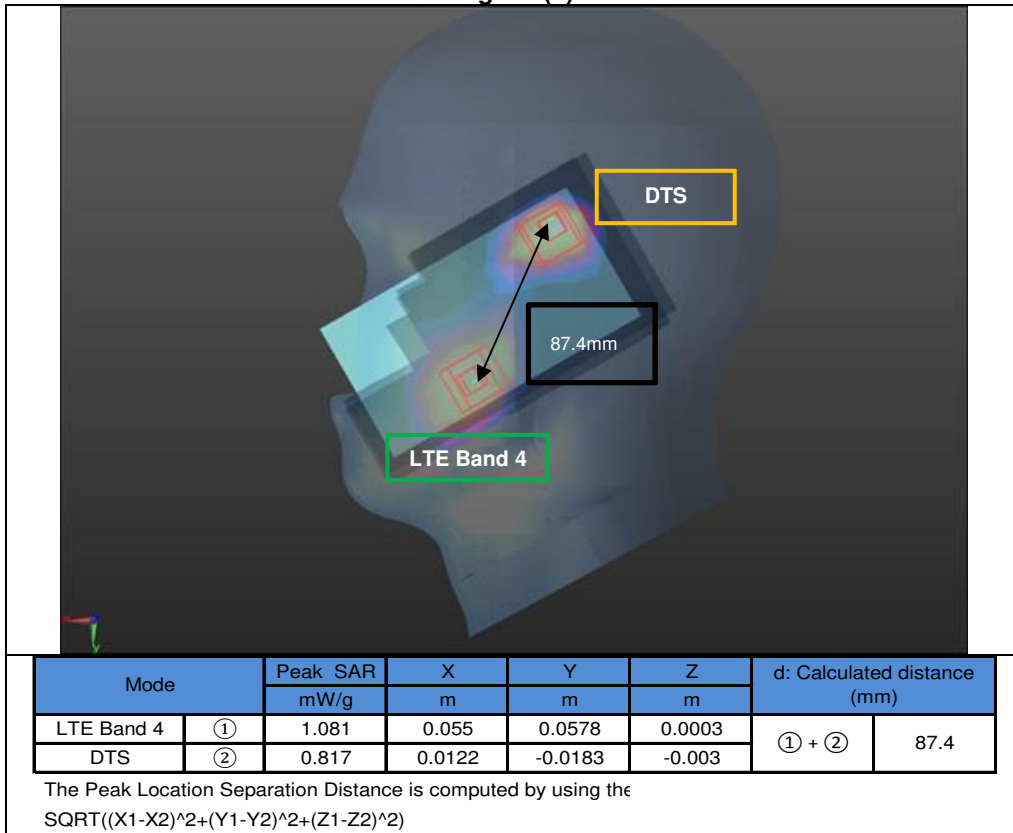


Figure (5)

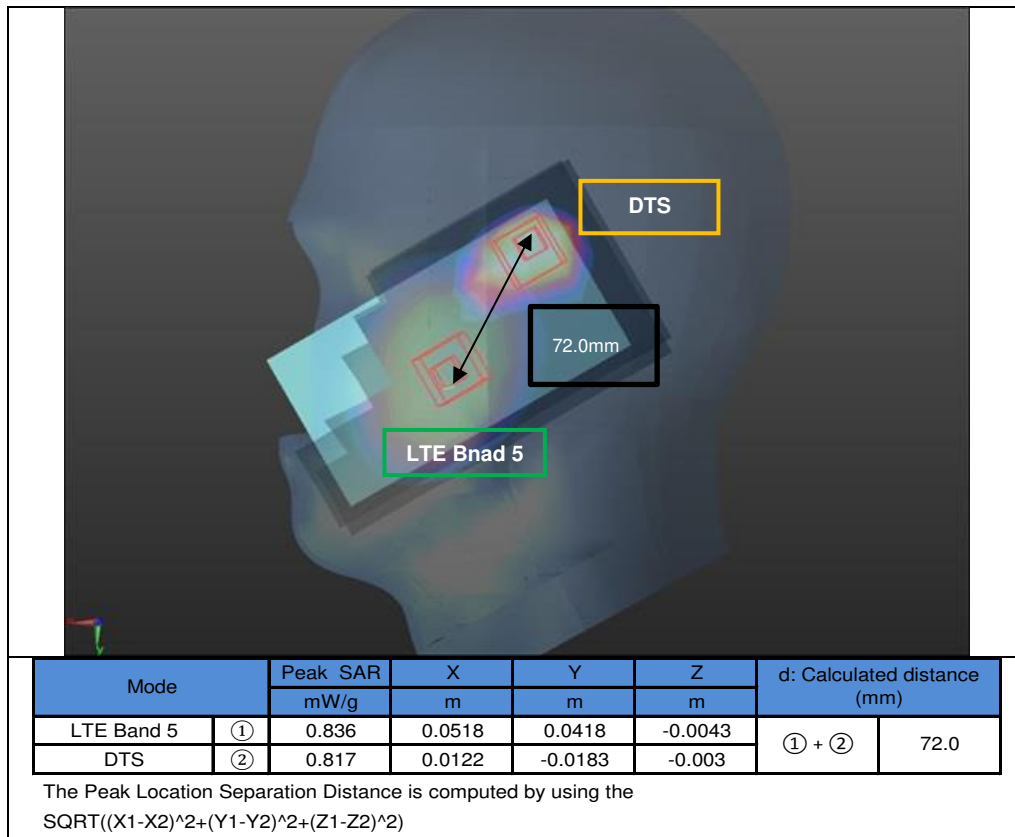

Appendixes

Refer to separated files for the following appendixes.

16K22699-S1V1 FCC Report SAR_App A_Photos & Ant. Locations

16K22699-S1V1 FCC Report SAR_App B_Highest SAR Test Plots

16K22699-S1V1 FCC Report SAR_App C_System Check Plots

16K22699-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients

16K22699-S1V1 FCC Report SAR_App E_Probe Cal. Certificates

16K22699-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates

END OF REPORT