

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Date of Issue:
July 09, 2018

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-1807-FC005-R1

FCC ID: A3LSMJ260G

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-J260G/DS
Additional Model(s): SM-J260Y/DS, SM-J260Y
EUT Type: Mobile Phone
FCC Classification: Licensed Non-Broadcast Transmitter Held to Ear (TNE)
FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 41 (5)	2498.5 – 2687.5	4M52G7D	QPSK	0.418	26.21
		4M51W7D	16QAM	0.303	24.82
LTE – Band 41 (10)	2501.0 – 2685.0	9M00G7D	QPSK	0.427	26.31
		9M00W7D	16QAM	0.321	25.07
LTE – Band 41 (15)	2503.5 – 2682.5	13M5G7D	QPSK	0.425	26.28
		13M5W7D	16QAM	0.307	24.87
LTE – Band 41 (20)	2506.0 – 2680.0	17M9G7D	QPSK	0.387	25.88
		17M9W7D	16QAM	0.278	24.44

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center



Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1807-FC005	July 04, 2018	- First Approval Report
HCT-RF-1807-FC005-R1	July 09, 2018	- Revised the FCC Classification on page 1, 4

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. DESCRIPTION OF EUT	5
2.2. MEASURING INSTRUMENT CALIBRATION	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS	6
3.1 TEST PROCEDURE	6
3.2 RADIATED POWER	7
3.3 RADIATED SPURIOUS EMISSIONS	8
3.4 OCCUPIED BANDWIDTH	9
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	10
3.6 CHANNEL EDGE.....	11
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	12
3.8 WORST CASE(RADIATED TEST).....	13
3.9 WORST CASE(CONDUCTED TEST)	14
4. LIST OF TEST EQUIPMENT	15
5. MEASUREMENT UNCERTAINTY	16
6. SUMMARY OF TEST RESULTS	17
7. SAMPLE CALCULATION	18
8. TEST DATA	20
8.1 EQUIVALENT ISOTROPIC RADIATED POWER	20
8.1.1 Model : SM-J260G/DS	20
8.1.2 Additional Model : SM-J260Y/DS	22
8.1.3 Additional Model : SM-J260Y	22
8.2 RADIATED SPURIOUS EMISSIONS	23
8.2.1 Model : SM-J260G/DS	23
8.2.2 Additional Model : SM-J260Y/DS	27
8.2.3 Additional Model : SM-J260Y	27
8.3 OCCUPIED BANDWIDTH	28
8.4 CONDUCTED SPURIOUS EMISSIONS	29
8.5 CHANNEL EDGE.....	30
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	31
8.7 GEO-LOCATION MECHANISM	43
9. TEST PLOTS.....	50
10. APPENDIX A_ TEST SETUP PHOTO	99

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMJ260G
Application Type:	Certification
FCC Classification:	Licensed Non-Broadcast Transmitter Held to Ear (TNE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile Phone
Model(s):	SM-J260G/DS
Additional Model(s):	SM-J260Y/DS, SM-J260Y
Tx Frequency:	2498.5 – 2687.5 : 5 MHz 2501.0 – 2685.0 : 10 MHz 2503.5 – 2682.5 : 15 MHz 2506.0 – 2680.0 : 20 MHz
Date(s) of Tests:	June 18, 2018 ~ June 29, 2018

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11/b/g/n (HT20), Bluetooth.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data

3.4 OCCUPIED BANDWIDTH.

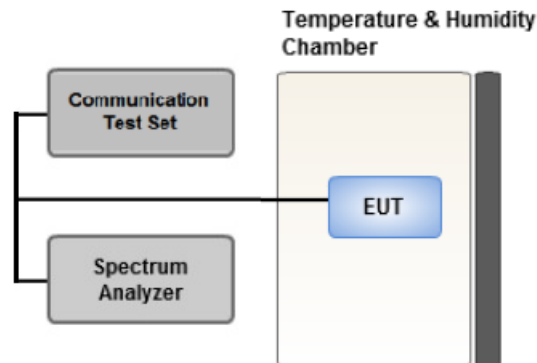

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

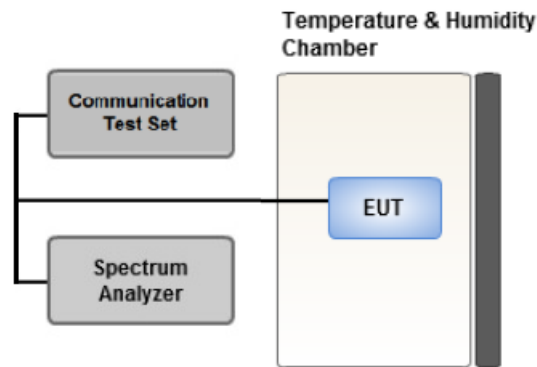

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep \geq 2 * Span / RBW

3.6 CHANNEL EDGE

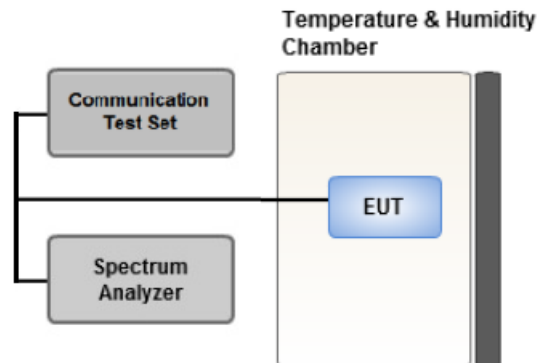

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings

1. Start and stop frequency were set such that the channel edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 2% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

1. The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
2. All measurements were done at 3 channels.
3. The channel edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

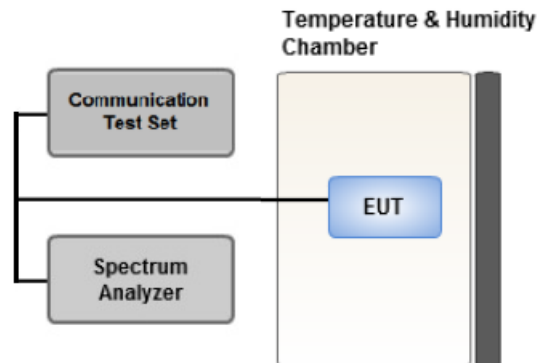

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	X

3.9 WORST CASE(CONDUCTED TEST)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM	5, 10, 15, 20	Mid	Full RB	0
Band Edge	* QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
5, 10, 15, 20	* QPSK	Low, High	Full RB	0	
		Low, Mid, High	Full RB	0	
Channel Edge	* QPSK	5, 10, 15, 20	Low, Mid, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	* QPSK	1	Low, Mid, High	1	0

* Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.
 Conducted Output Power value can be confirmed on the SAR report.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/17/2018	Annual	04/17/2019
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/04/2018	Annual	04/04/2019
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/04/2018	Annual	04/04/2019
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	5001	06/07/2018	Annual	06/07/2019
Agilent	E3632A/DC Power Supply	KR75303243	05/09/2018	Annual	05/09/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/31/2017	Biennial	03/31/2019
Schwarzbeck	UHAP/ Dipole Antenna	558	03/31/2017	Biennial	03/31/2019
ESPEC	SU-642 / Chamber	93000718	07/21/2017	Annual	07/21/2018
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/09/2016	Biennial	09/09/2018
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/14/2016	Biennial	10/14/2018
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/25/2017	Biennial	04/25/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	04/25/2017	Biennial	04/25/2019
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/08/2018	Annual	06/08/2019
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/21/2018	Annual	06/21/2019
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/30/2017	Annual	10/30/2018
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/26/2017	Annual	09/26/2018
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/19/2017	Biennial	04/19/2019
Schwarzbeck	VULB9160/ Bilog Antenna	3150	09/30/2016	Biennial	09/30/2018
Schwarzbeck	VULB9160/ Bilog Antenna	9360-3368	10/14/2016	Biennial	10/14/2018
Schwarzbeck	VULB9160/ Hybrid Antenna	760	04/06/2017	Biennial	04/06/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200863156	02/13/2018	Annual	02/13/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	02/08/2018	Annual	02/08/2019
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/18/2017	Annual	07/18/2018
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer	100931	10/30/2017	Annual	10/30/2018
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	08/16/2017	Annual	08/16/2018
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	<ul style="list-style-type: none"> ■ $< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges ■ $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges ■ $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges ■ $< 43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz 	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}])$	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
40620	2593.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

8.1.1 Model : SM-J260G/DS

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2498.5	LTE B41/ 5 MHz	QPSK	-19.24	16.45	10.95	2.35	H	< 2.00	0.320	25.05
		16-QAM	-20.58	15.11	10.95	2.35	H		0.235	23.71
2593.0		QPSK	-18.33	17.58	11.03	2.40	H		0.418	26.21
		16-QAM	-19.72	16.19	11.03	2.40	H		0.303	24.82
2687.5		QPSK	-19.35	16.97	11.10	2.46	H		0.364	25.61
		16-QAM	-20.74	15.58	11.10	2.46	H		0.264	24.22

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2501.0	LTE B41/ 10 MHz	QPSK	-19.04	16.65	10.95	2.35	H	< 2.00	0.335	25.25
		16-QAM	-20.54	15.15	10.95	2.35	H		0.237	23.75
2593.0		QPSK	-18.23	17.68	11.03	2.40	H		0.427	26.31
		16-QAM	-19.47	16.44	11.03	2.40	H		0.321	25.07
2685.0		QPSK	-19.23	17.05	11.09	2.46	H		0.370	25.68
		16-QAM	-20.45	15.83	11.09	2.46	H		0.279	24.46

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2503.5	LTE B41/ 15 MHz	QPSK	-18.95	16.73	10.95	2.35	H	< 2.00	0.341	25.33
		16-QAM	-20.47	15.21	10.95	2.35	H		0.240	23.81
2593.0		QPSK	-18.26	17.65	11.03	2.40	H		0.425	26.28
		16-QAM	-19.67	16.24	11.03	2.40	H		0.307	24.87
2682.5		QPSK	-19.59	16.63	11.09	2.46	H		0.336	25.26
		16-QAM	-20.82	15.40	11.09	2.46	H		0.253	24.03

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2506.0	LTE B41/ 20 MHz	QPSK	-19.10	16.58	10.95	2.35	H	< 2.00	0.330	25.18
		16-QAM	-20.75	14.93	10.95	2.35	H		0.225	23.53
2593.0		QPSK	-18.66	17.25	11.03	2.40	H		0.387	25.88
		16-QAM	-20.26	15.65	11.03	2.40	H		0.268	24.28
2680.0		QPSK	-19.10	17.08	11.09	2.46	H		0.372	25.71
		16-QAM	-20.37	15.81	11.09	2.46	H		0.278	24.44

8.1.2 Additional Model : SM-J260Y/DS

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2593.0	LTE B41/ 10 MHz	QPSK	-18.61	17.30	11.03	2.40	H	< 2.00	0.392	25.93

Note:

1. All modes of operation were investigated and the EIRP result for SM-J260Y/DS are worst case in all bandwidth & channel.

8.1.3 Additional Model : SM-J260Y

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2593.0	LTE B41/ 10 MHz	QPSK	-19.19	16.72	11.03	2.40	V	< 2.00	0.343	25.35

Note:

1. All modes of operation were investigated and the EIRP result for SM-J260Y are worst case in all bandwidth & channel.
2. SM-J260Y and SM-J260Y/DS are same hardware, but for different only number of SIM card slot.
 - SM-J260Y : Single SIM
 - SM-J260Y/DS : Dual SIM

8.2 RADIATED SPURIOUS EMISSIONS

8.2.1 Model : SM-J260G/DS

- ▣ OPERATING FREQUENCY : 2593.00 MHz
- ▣ MEASURED OUTPUT POWER: 26.21 dBm = 0.418 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 51.21 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc	Detector
39675 (2498.5)	4,997.00	-46.43	12.57	-60.96	3.39	V	-51.78	77.99	Peak
	7,495.50	-50.45	11.71	-58.19	4.17	V	-50.65	76.86	Peak
	9,994.00	-46.21	11.03	-49.63	5.00	H	-43.60	69.81	Peak
	12,492.50	-53.80	14.03	-59.10	5.63	H	-50.70	76.91	Peak
	14,991.00	-51.99	13.25	-54.79	6.32	V	-47.86	74.07	Peak
40620 (2593.0)	5,186.00	-47.91	12.84	-62.12	3.47	V	-52.75	78.96	Peak
	7,779.00	-43.11	11.50	-50.89	4.27	V	-43.66	69.87	Peak
	10,372.00	-40.46	10.81	-44.70	5.06	V	-38.95	65.16	Peak
	12,965.00	-51.73	13.50	-55.31	5.74	H	-47.55	73.76	Peak
	15,558.00	-49.76	16.13	-54.83	6.39	H	-45.09	71.30	Peak
41565 (2687.5)	5,375.00	-47.29	13.11	-60.83	3.53	V	-51.25	77.46	Peak
	8,062.50	-44.04	11.44	-50.10	4.42	V	-43.08	69.29	Peak
	10,750.00	-42.68	10.70	-46.51	5.09	H	-40.90	67.11	Peak
	13,437.50	-49.35	12.70	-50.82	5.82	H	-43.94	70.15	Peak
	16,125.00	-52.19	16.94	-57.68	6.49	H	-47.23	73.44	Peak

- ▣ OPERATING FREQUENCY : 2593.00 MHz
- ▣ MEASURED OUTPUT POWER: 26.31 dBm = 0.427 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 51.31 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc	Detector
39700 (2501.0)	5,002.00	-47.80	12.57	-62.07	3.40	H	-52.90	79.21	Peak
	7,503.00	-49.55	11.71	-57.80	4.19	V	-50.28	76.59	Peak
	10,004.00	-46.78	11.02	-50.24	5.04	V	-44.26	70.57	Peak
	12,505.00	-55.50	14.05	-60.99	5.68	V	-52.62	78.93	Peak
	15,006.00	-53.37	13.31	-56.01	6.31	V	-49.01	75.32	Peak
40620 (2593.0)	5,186.00	-49.03	12.84	-63.24	3.47	H	-53.87	80.18	Peak
	7,779.00	-42.93	11.50	-50.71	4.27	H	-43.48	69.79	Peak
	10,372.00	-40.72	10.81	-44.96	5.06	V	-39.21	65.52	Peak
	12,965.00	-50.89	13.50	-54.47	5.74	H	-46.71	73.02	Peak
	15,558.00	-53.08	16.13	-58.15	6.39	H	-48.41	74.72	Peak
41540 (2685.0)	5,370.00	-51.20	13.10	-64.72	3.53	H	-55.15	81.46	Peak
	8,055.00	-43.49	11.43	-49.47	4.42	V	-42.46	68.77	Peak
	10,740.00	-43.30	10.70	-46.83	5.11	H	-41.24	67.55	Peak
	13,425.00	-49.98	12.71	-51.73	5.81	H	-44.83	71.14	Peak
	16,110.00	-51.58	16.97	-57.54	6.49	H	-47.06	73.37	Peak

- ▣ OPERATING FREQUENCY : 2593.00 MHz
- ▣ MEASURED OUTPUT POWER: 26.28 dBm = 0.425 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 51.28 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc	Detector
39725 (2503.5)	5,007.00	-47.94	12.58	-61.83	3.40	H	-52.65	78.93	Peak
	7,510.50	-48.50	11.70	-56.97	4.15	V	-49.42	75.70	Peak
	10,014.00	-44.87	11.01	-48.65	5.02	H	-42.66	68.94	Peak
	12,517.50	-52.24	14.03	-57.79	5.71	H	-49.47	75.75	Peak
	15,021.00	-51.44	13.39	-53.68	6.28	V	-46.57	72.85	Peak
40620 (2593.0)	5,186.00	-49.33	12.84	-63.54	3.47	H	-54.17	80.45	Peak
	7,779.00	-44.68	11.50	-52.46	4.27	V	-45.23	71.51	Peak
	10,372.00	-41.34	10.81	-45.58	5.06	V	-39.83	66.11	Peak
	12,965.00	-53.66	13.50	-57.24	5.74	H	-49.48	75.76	Peak
	15,558.00	-54.11	16.13	-59.18	6.39	H	-49.44	75.72	Peak
41515 (2682.5)	5,365.00	-50.03	13.10	-63.37	3.54	H	-53.81	80.09	Peak
	8,047.50	-42.24	11.40	-48.37	4.40	H	-41.37	67.65	Peak
	10,730.00	-44.51	10.71	-47.97	5.12	V	-42.38	68.66	Peak
	13,412.50	-49.28	12.74	-51.23	5.84	H	-44.33	70.61	Peak
	16,095.00	-49.38	17.02	-54.19	6.52	H	-43.69	69.97	Peak

- ▣ OPERATING FREQUENCY : 2593.00 MHz
- ▣ MEASURED OUTPUT POWER: 25.88 dBm = 0.387 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 50.88 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc	Detector
39750 (2506.0)	5,012.00	-48.51	12.58	-61.96	3.40	H	-52.78	78.66	Peak
	7,518.00	-50.53	11.70	-58.99	3.98	V	-51.27	77.15	Peak
	10,024.00	-47.73	11.01	-51.45	5.08	V	-45.52	71.40	Peak
	12,530.00	-53.71	14.01	-59.61	5.71	H	-51.31	77.19	Peak
40620 (2593.0)	5,186.00	-48.17	12.84	-62.38	3.47	H	-53.01	78.89	Peak
	7,779.00	-46.37	11.50	-54.15	4.27	H	-46.92	72.80	Peak
	10,372.00	-40.22	10.81	-44.46	5.06	V	-38.71	64.59	Peak
	12,965.00	-51.14	13.50	-54.72	5.74	H	-46.96	72.84	Peak
	15,558.00	-54.54	16.13	-59.61	6.39	H	-49.87	75.75	Peak
41490 (2680.0)	5,360.00	-53.66	13.09	-66.82	3.54	H	-57.27	83.15	Peak
	8,040.00	-42.85	11.40	-49.19	4.40	H	-42.19	68.07	Peak
	10,720.00	-45.58	10.71	-48.50	5.13	V	-42.92	68.80	Peak
	13,400.00	-49.48	12.75	-51.37	5.90	H	-44.52	70.40	Peak
	16,080.00	-50.44	17.05	-54.71	6.53	H	-44.19	70.07	Peak

8.2.2 Additional Model : SM-J260Y/DS

- ▣ OPERATING FREQUENCY: 2593.0 MHz
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 1 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Detector
40620 (2593.0)	10,372.00	-40.59	10.81	-44.83	5.06	V	-39.08	Peak

Note:

1. All modes of operation were investigated and the RSE result for SM-J260Y/DS are worst case in all bandwidth & channel.

8.2.3 Additional Model : SM-J260Y

- ▣ OPERATING FREQUENCY: 2593.0 MHz
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 1 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Detector
40620 (2593.0)	10,372.00	-40.91	10.81	-45.15	5.06	V	-39.40	Peak

Note:

1. All modes of operation were investigated and the RSE result for SM-J260Y are worst case in all bandwidth & channel.
2. SM-J260Y and SM-J260Y/DS are same hardware, but for different only number of SIM card slot.
 - SM-J260Y : Single SIM
 - SM-J260Y/DS : Dual SIM

8.3 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
41	5 MHz	2593.0	QPSK	25	0	4.5194
			16-QAM			4.5059
	10 MHz		QPSK	50		8.9998
			16-QAM			8.9899
	15 MHz		QPSK	75		13.467
			16-QAM			13.484
	20 MHz		QPSK	100		17.940
			16-QAM			17.936

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 51 ~ 58.

8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
41	5	2498.5	26.4559	30.131	-66.541	-36.410	-25.00
		2593.0	25.8973	30.131	-66.671	-36.540	
		2687.5	26.1539	30.131	-66.961	-36.830	
	10	2501.0	25.8070	30.131	-66.776	-36.645	
		2593.0	25.7439	30.131	-66.501	-36.370	
		2685.0	26.2034	30.131	-66.258	-36.127	
	15	2503.5	26.1172	30.131	-66.503	-36.372	
		2593.0	26.1469	30.131	-66.741	-36.610	
		2682.5	25.8317	30.131	-66.802	-36.671	
	20	2506.0	26.3771	30.131	-65.964	-35.833	
		2593.0	26.0640	30.131	-67.114	-36.983	
		2680.0	25.8103	30.131	-66.399	-36.268	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 75 ~ 98.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131

8.5 CHANNEL EDGE

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Lower
5 MHz	2498.5	QPSK	25/0	-20.65	-21.99	-18.83	-18.33	-32.03	-29.17	-32.67
10 MHz	2501.0	QPSK	50/0	-24.07	-23.21	-22.36	-22.06	-28.25	-24.75	-32.07
15 MHz	2503.5	QPSK	75/0	-25.78	-26.61	-25.10	-24.58	-29.38	-26.67	-35.91
20 MHz	2506.0	QPSK	100/0	-27.54	-26.45	-26.50	-25.86	-30.69	-27.70	-37.55
Limit				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-20.70	-21.00	-19.90	-20.12
	2687.5	QPSK	25	0	-21.17	-22.41	-20.15	-19.96
10 MHz	2593.0	QPSK	50	0	-23.79	-24.61	-21.33	-21.10
	2685.0	QPSK	50	0	-22.80	-22.90	-22.27	-21.78
15 MHz	2593.0	QPSK	75	0	-25.31	-25.84	-25.00	-24.64
	2682.5	QPSK	75	0	-27.47	-25.71	-24.84	-24.32
20 MHz	2593.0	QPSK	100	0	-27.26	-26.40	-25.76	-25.42
	2680.0	QPSK	100	0	-26.98	-27.27	-26.17	-26.42
Limit					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-32.77	-32.05	-35.59	-34.87
	2687.5	QPSK	25	0	-30.35	-30.54	-33.96	-34.46
10 MHz	2593.0	QPSK	50	0	-27.30	-26.93	-37.55	-36.17
	2685.0	QPSK	50	0	-25.06	-26.46	-34.10	-35.21
15 MHz	2593.0	QPSK	75	0	-27.41	-26.77	-38.02	-36.55
	2682.5	QPSK	75	0	-26.87	-28.05	-35.73	-37.28
20 MHz	2593.0	QPSK	100	0	-28.82	-27.81	-39.71	-37.44
	2680.0	QPSK	100	0	-26.52	-27.67	-36.31	-37.46
Limit					-13.0		-25.0	


Note:

1. C.E = Channel Edge
2. X = X is the greater of 6MHz or the actual emission bandwidth.
3. X = 6MHz(5MHz Bandwidth), 10MHz(10MHz Bandwidth), 15MHz(15MHz Bandwidth), 20MHz(20MHz Bandwidth)
4. Plots of the EUT's Channel Edge are shown Page 59 ~ 74.

8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: LTE 41
- OPERATING FREQUENCY: 2498,500,000 Hz
- BANDWIDTH: 39675 (5 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2498 500 010	0.0	0.000 000	0.000
100%		-30	2498 500 024	14.2	0.000 001	0.006
100%		-20	2498 500 019	9.1	0.000 000	0.004
100%		-10	2498 500 021	10.5	0.000 000	0.004
100%		0	2498 500 021	10.8	0.000 000	0.004
100%		+10	2498 500 020	9.9	0.000 000	0.004
100%		+30	2498 500 022	11.8	0.000 000	0.005
100%		+40	2498 500 021	11.3	0.000 000	0.005
100%		+50	2498 500 021	11.0	0.000 000	0.004
85%		3.40	+20	2498 500 020	10.3	0.000 000

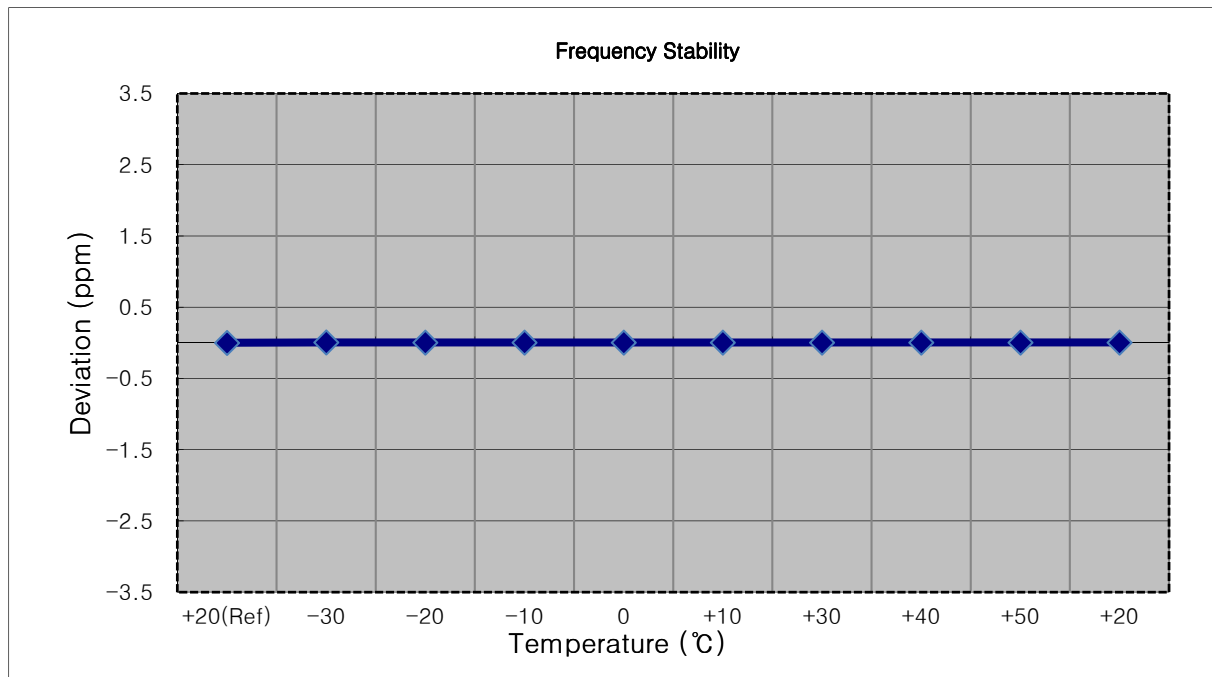


- MODE: LTE 41
- OPERATING FREQUENCY: 2501,000,000 Hz
- BANDWIDTH: 39700 (10 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2501 000 014	0.0	0.000 000	0.000
100%		-30	2501 000 025	11.5	0.000 000	0.005
100%		-20	2501 000 024	10.2	0.000 000	0.004
100%		-10	2501 000 031	17.1	0.000 001	0.007
100%		0	2501 000 024	9.9	0.000 000	0.004
100%		+10	2501 000 025	11.4	0.000 000	0.005
100%		+30	2501 000 023	9.2	0.000 000	0.004
100%		+40	2501 000 025	11.4	0.000 000	0.005
100%		+50	2501 000 023	9.4	0.000 000	0.004
85%	3.40	+20	2501 000 023	9.3	0.000 000	0.004

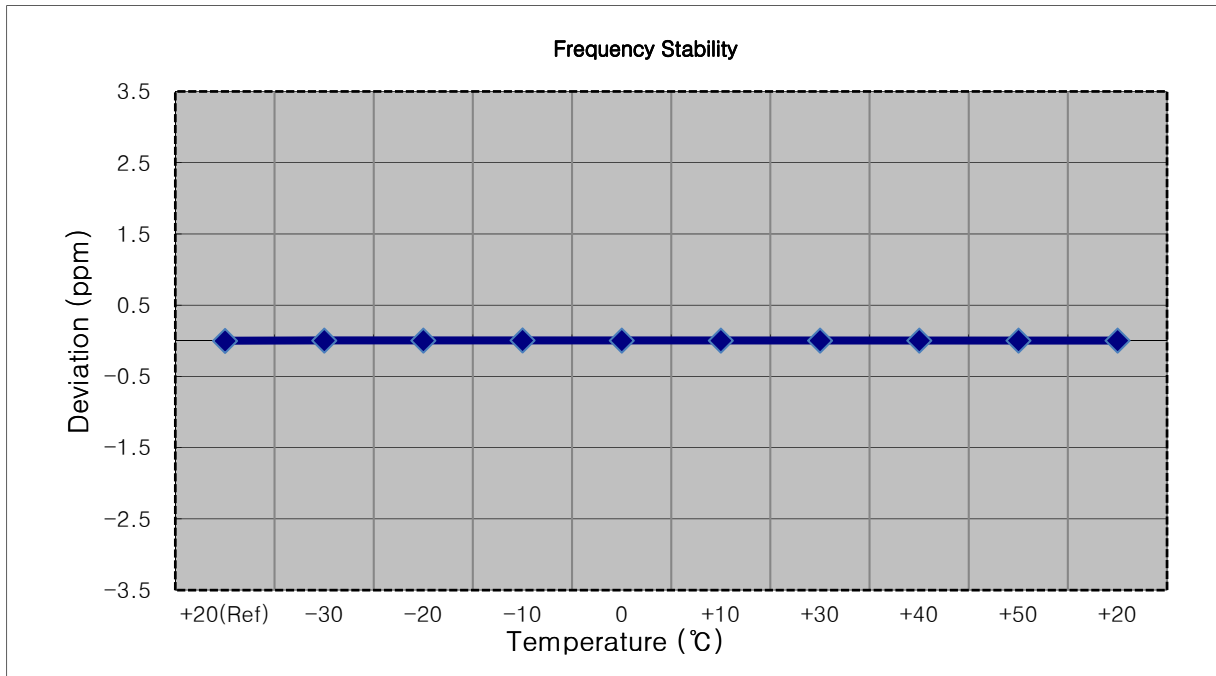


- MODE: LTE 41
- OPERATING FREQUENCY: 2503,500,000 Hz
- BANDWIDTH: 39725 (15 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2503 500 012	0.0	0.000 000	0.000
100%		-30	2503 500 025	12.1	0.000 000	0.005
100%		-20	2503 500 027	14.1	0.000 001	0.006
100%		-10	2503 500 028	15.5	0.000 001	0.006
100%		0	2503 500 026	13.6	0.000 001	0.005
100%		+10	2503 500 028	15.3	0.000 001	0.006
100%		+30	2503 500 026	13.7	0.000 001	0.005
100%		+40	2503 500 029	16.4	0.000 001	0.007
100%		+50	2503 500 027	14.9	0.000 001	0.006
85%	3.40	+20	2503 500 024	11.6	0.000 000	0.005

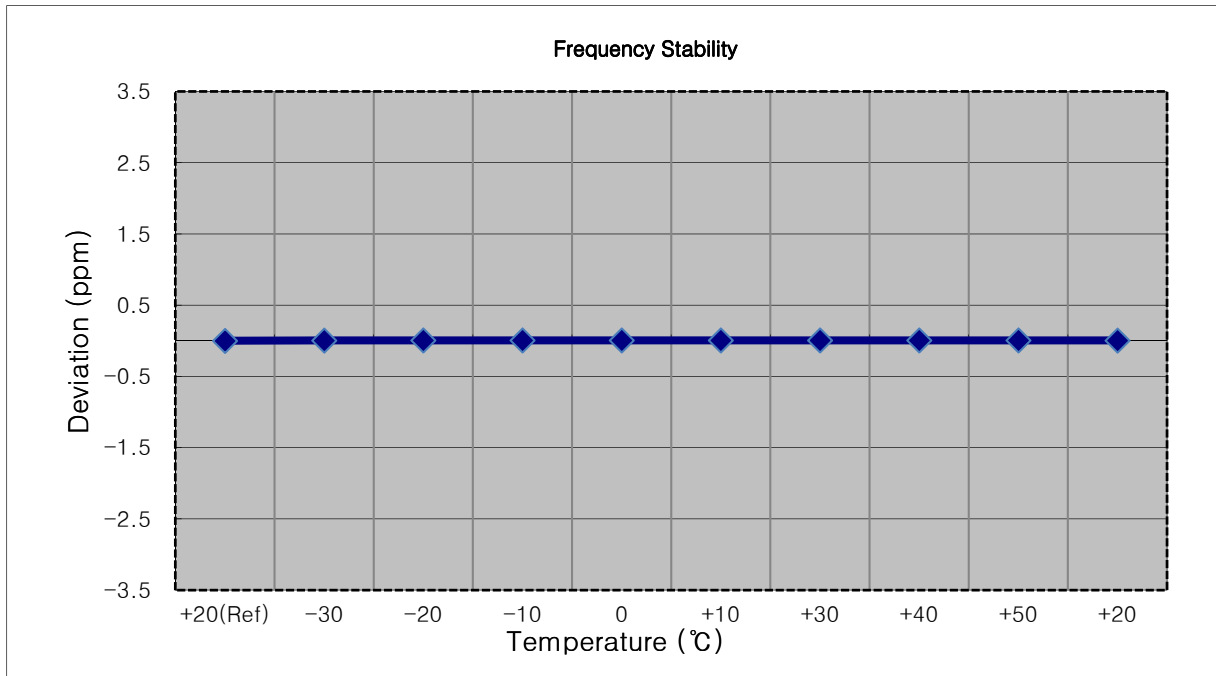


- MODE: LTE 41
- OPERATING FREQUENCY: 2506, 00,000 Hz
- BANDWIDTH: 39750 (20 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2506 000 018	0.0	0.000 000	0.000
100%		-30	2506 000 035	17.3	0.000 001	0.007
100%		-20	2506 000 033	15.6	0.000 001	0.006
100%		-10	2506 000 033	14.8	0.000 001	0.006
100%		0	2506 000 034	16.2	0.000 001	0.006
100%		+10	2506 000 033	14.8	0.000 001	0.006
100%		+30	2506 000 033	14.9	0.000 001	0.006
100%		+40	2506 000 036	18.6	0.000 001	0.007
100%		+50	2506 000 036	18.5	0.000 001	0.007
85%	3.40	+20	2506 000 034	16.5	0.000 001	0.007

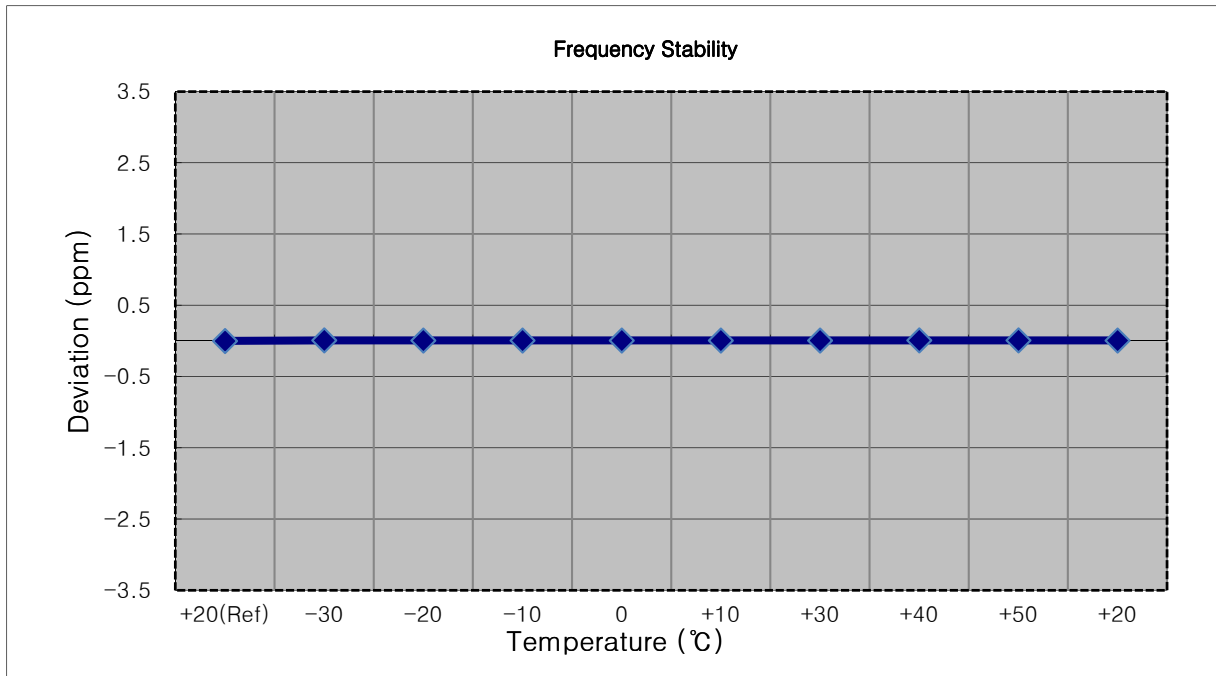


- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- BANDWIDTH: 40620 (5 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2593 000 012	0.0	0.000 000	0.000
100%		-30	2593 000 020	8.6	0.000 000	0.003
100%		-20	2593 000 021	9.4	0.000 000	0.004
100%		-10	2593 000 024	12.3	0.000 000	0.005
100%		0	2593 000 022	10.2	0.000 000	0.004
100%		+10	2593 000 022	10.6	0.000 000	0.004
100%		+30	2593 000 022	10.0	0.000 000	0.004
100%		+40	2593 000 021	9.0	0.000 000	0.003
100%		+50	2593 000 020	8.4	0.000 000	0.003
85%	3.40	+20	2593 000 023	11.7	0.000 000	0.005

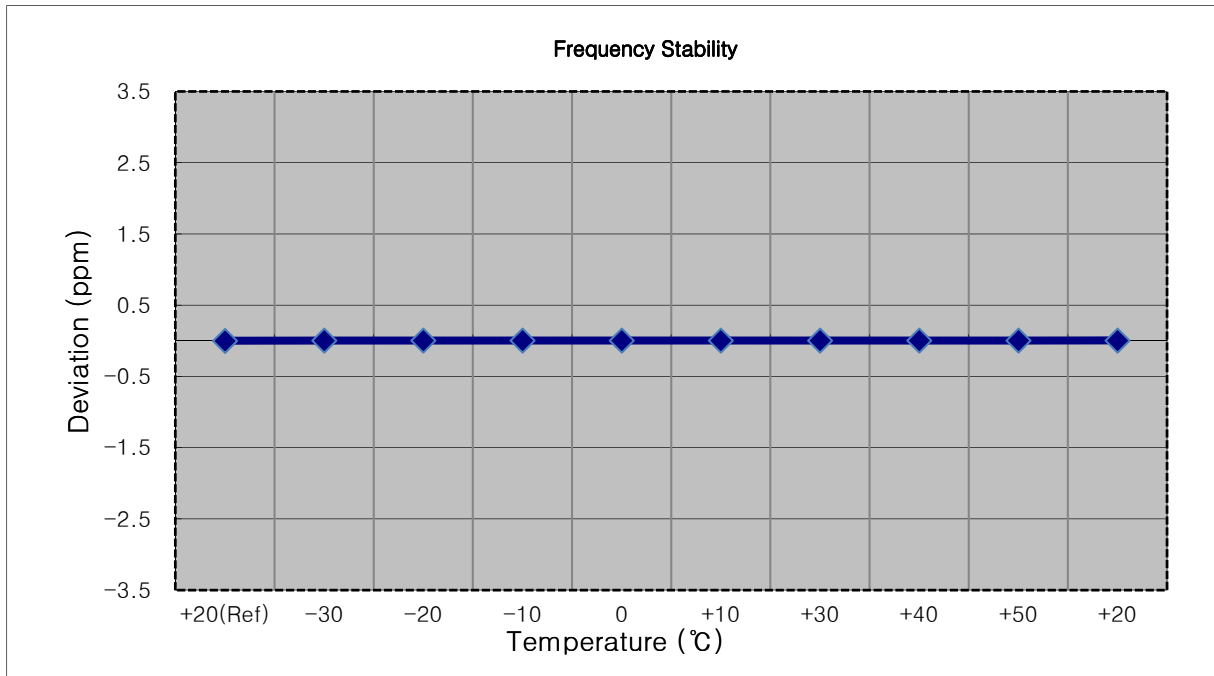


- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- BANDWIDTH: 40620 (10 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2501 000 017	0.0	0.000 000	0.000
100%		-30	2501 000 032	15.3	0.000 001	0.006
100%		-20	2501 000 029	12.0	0.000 000	0.005
100%		-10	2501 000 029	12.3	0.000 000	0.005
100%		0	2501 000 034	17.0	0.000 001	0.007
100%		+10	2501 000 029	12.6	0.000 001	0.005
100%		+30	2501 000 030	13.7	0.000 001	0.005
100%		+40	2501 000 031	14.0	0.000 001	0.006
100%		+50	2501 000 032	15.2	0.000 001	0.006
85%	3.40	+20	2501 000 031	14.2	0.000 001	0.006

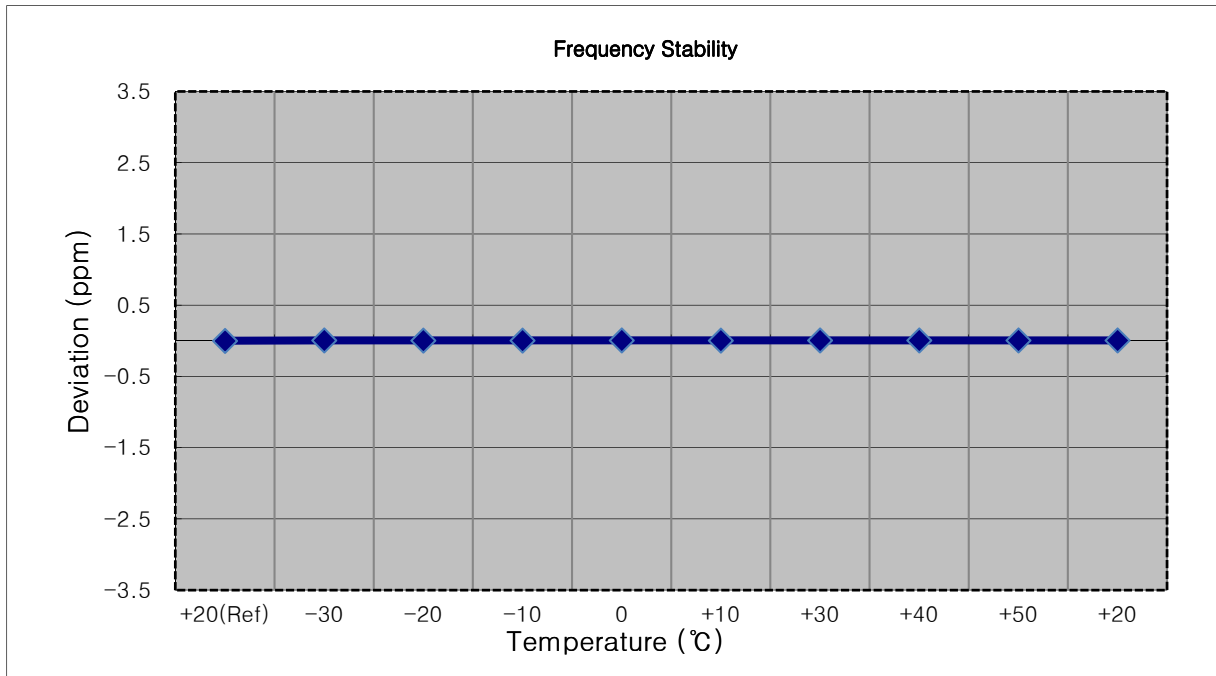


- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- BANDWIDTH: 40620 (15 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2593 000 012	0.0	0.000 000	0.000
100%		-30	2593 000 027	14.5	0.000 001	0.006
100%		-20	2593 000 025	12.6	0.000 000	0.005
100%		-10	2593 000 028	15.8	0.000 001	0.006
100%		0	2593 000 029	16.6	0.000 001	0.006
100%		+10	2593 000 029	16.8	0.000 001	0.006
100%		+30	2593 000 029	16.8	0.000 001	0.006
100%		+40	2593 000 025	12.7	0.000 000	0.005
100%		+50	2593 000 026	14.1	0.000 001	0.005
85%	3.40	+20	2593 000 030	17.4	0.000 001	0.007

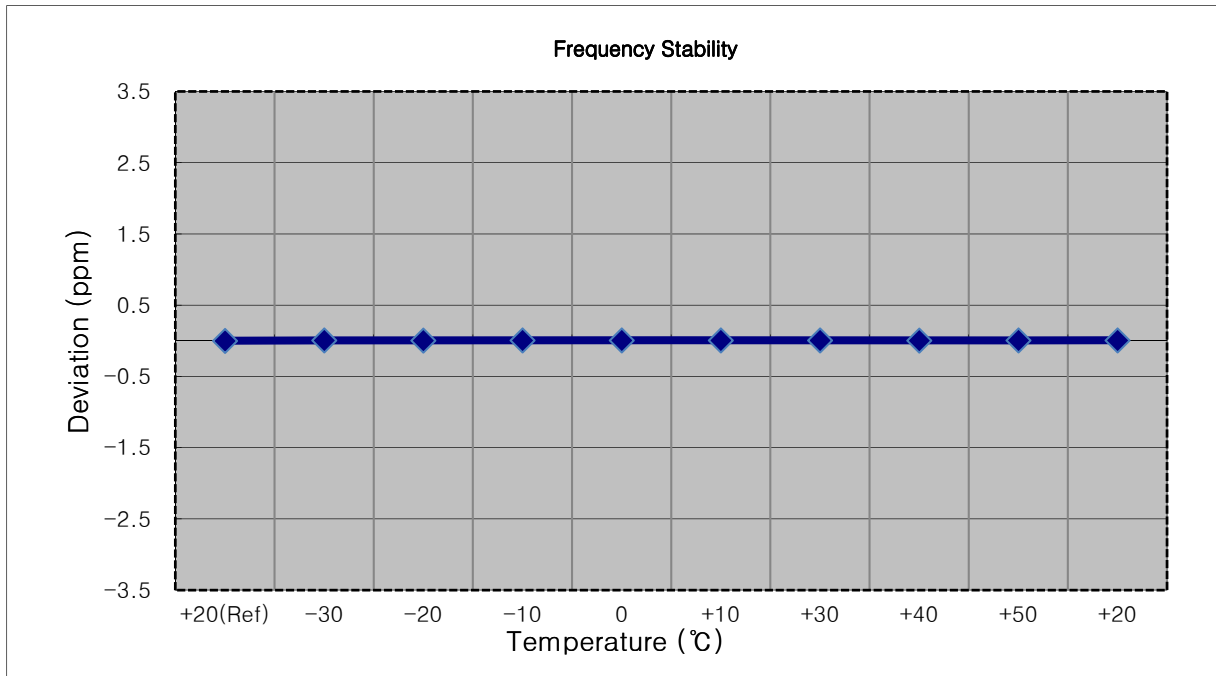


- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- BANDWIDTH: 40620 (20 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2593 000 015	0.0	0.000 000	0.000
100%		-30	2593 000 028	12.6	0.000 000	0.005
100%		-20	2593 000 030	15.1	0.000 001	0.006
100%		-10	2593 000 030	15.2	0.000 001	0.006
100%		0	2593 000 030	15.5	0.000 001	0.006
100%		+10	2593 000 031	15.7	0.000 001	0.006
100%		+30	2593 000 030	15.3	0.000 001	0.006
100%		+40	2593 000 029	14.4	0.000 001	0.006
100%		+50	2593 000 030	15.1	0.000 001	0.006
85%	3.40	+20	2593 000 030	15.2	0.000 001	0.006

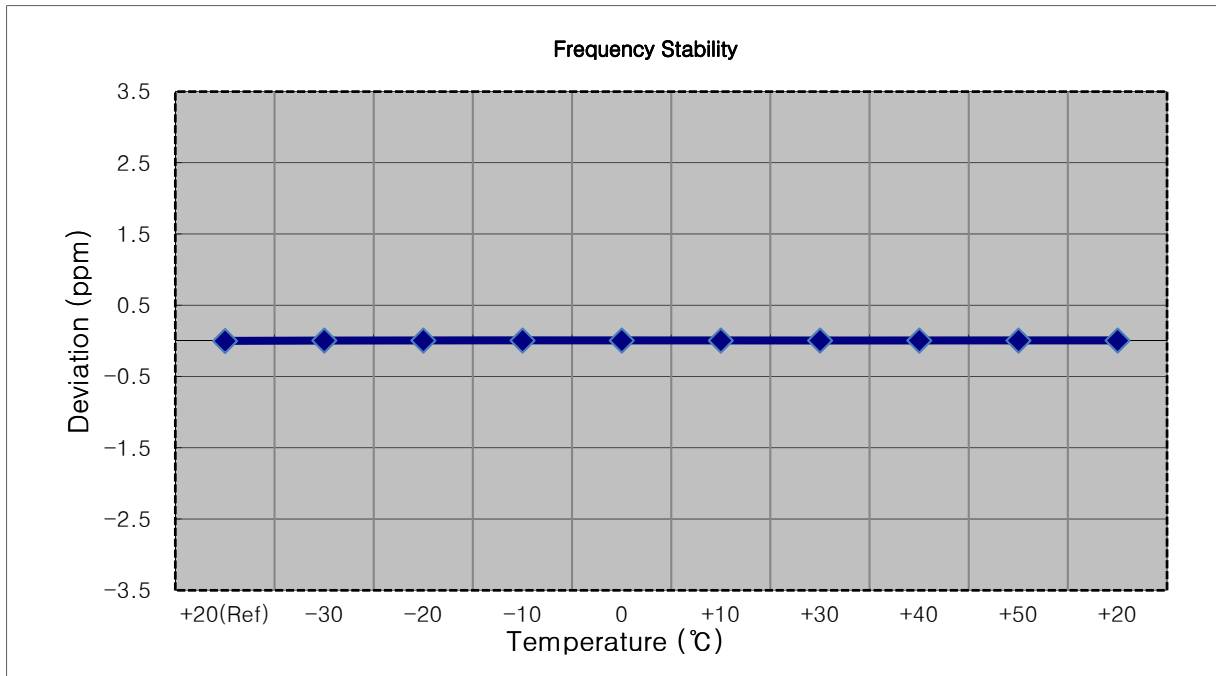


- MODE: LTE 41
- OPERATING FREQUENCY: 2687,500,000 Hz
- BANDWIDTH: 41565 (5 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2687 500 014	0.0	0.000 000	0.000
100%		-30	2687 500 029	15.0	0.000 001	0.006
100%		-20	2687 500 028	14.0	0.000 001	0.005
100%		-10	2687 500 028	13.2	0.000 000	0.005
100%		0	2687 500 028	13.8	0.000 001	0.005
100%		+10	2687 500 030	16.1	0.000 001	0.006
100%		+30	2687 500 027	12.8	0.000 000	0.005
100%		+40	2687 500 030	15.5	0.000 001	0.006
100%		+50	2687 500 029	14.3	0.000 001	0.005
85%	3.40	+20	2687 500 029	15.1	0.000 001	0.006

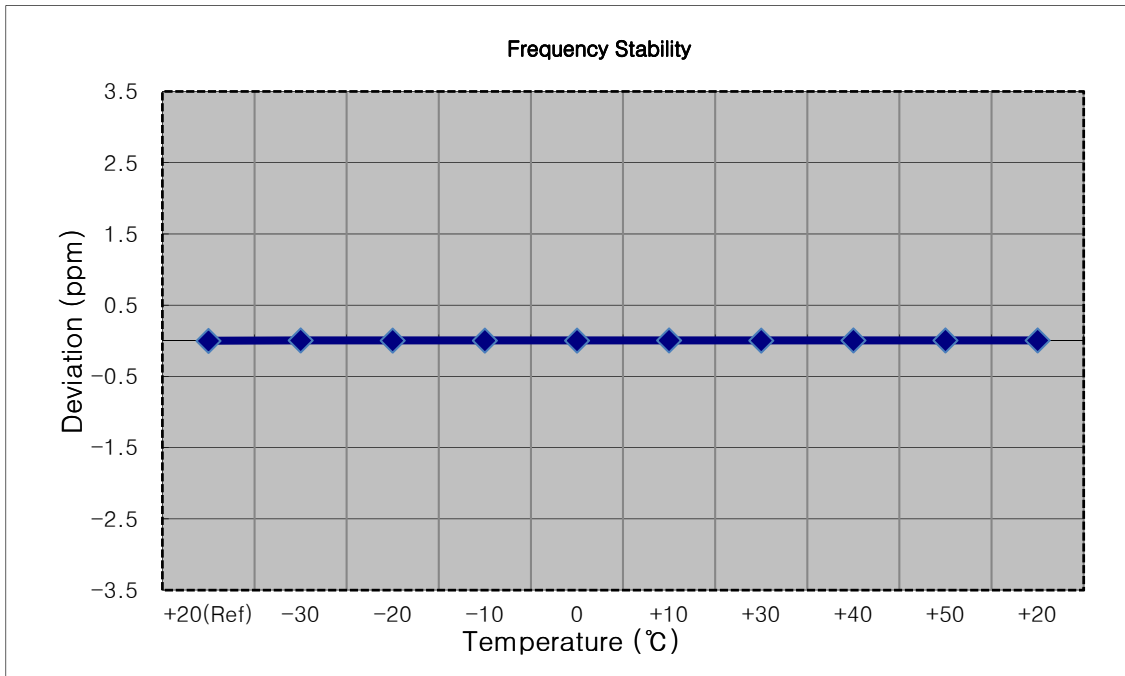


- MODE: LTE 41
- OPERATING FREQUENCY: 2685,000,000 Hz
- BANDWIDTH: 41540 (10 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2685 000 018	0.0	0.000 000	0.000
100%		-30	2685 000 030	12.2	0.000 000	0.005
100%		-20	2685 000 032	14.4	0.000 001	0.005
100%		-10	2685 000 032	14.1	0.000 001	0.005
100%		0	2685 000 031	13.8	0.000 001	0.005
100%		+10	2685 000 035	17.5	0.000 001	0.007
100%		+30	2685 000 031	13.1	0.000 000	0.005
100%		+40	2685 000 034	16.5	0.000 001	0.006
100%		+50	2685 000 032	14.8	0.000 001	0.006
85%	3.40	+20	2685 000 031	13.3	0.000 000	0.005

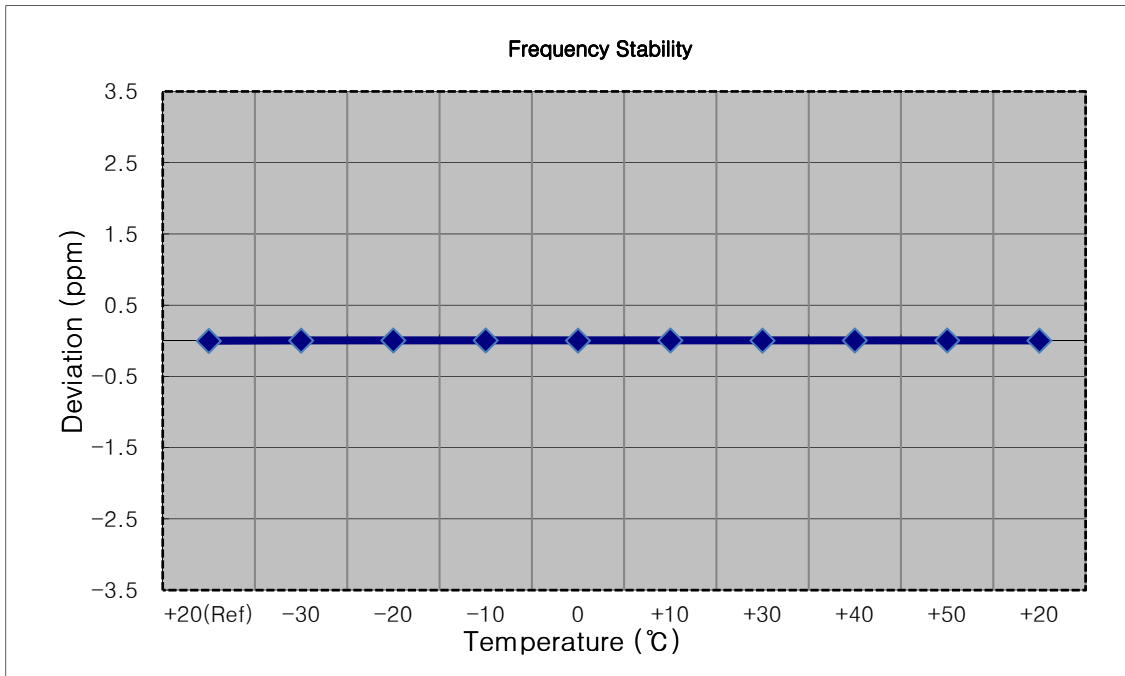


- MODE: LTE 41
- OPERATING FREQUENCY: 2682,500,000 Hz
- BANDWIDTH: 41515 (15 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2682 500 014	0.0	0.000 000	0.000
100%		-30	2682 500 027	12.9	0.000 000	0.005
100%		-20	2682 500 028	13.8	0.000 001	0.005
100%		-10	2682 500 027	13.4	0.000 000	0.005
100%		0	2682 500 025	11.6	0.000 000	0.004
100%		+10	2682 500 026	12.7	0.000 000	0.005
100%		+30	2682 500 027	13.5	0.000 001	0.005
100%		+40	2682 500 027	13.7	0.000 001	0.005
100%		+50	2682 500 030	16.2	0.000 001	0.006
85%	3.40	+20	2682 500 029	15.2	0.000 001	0.006

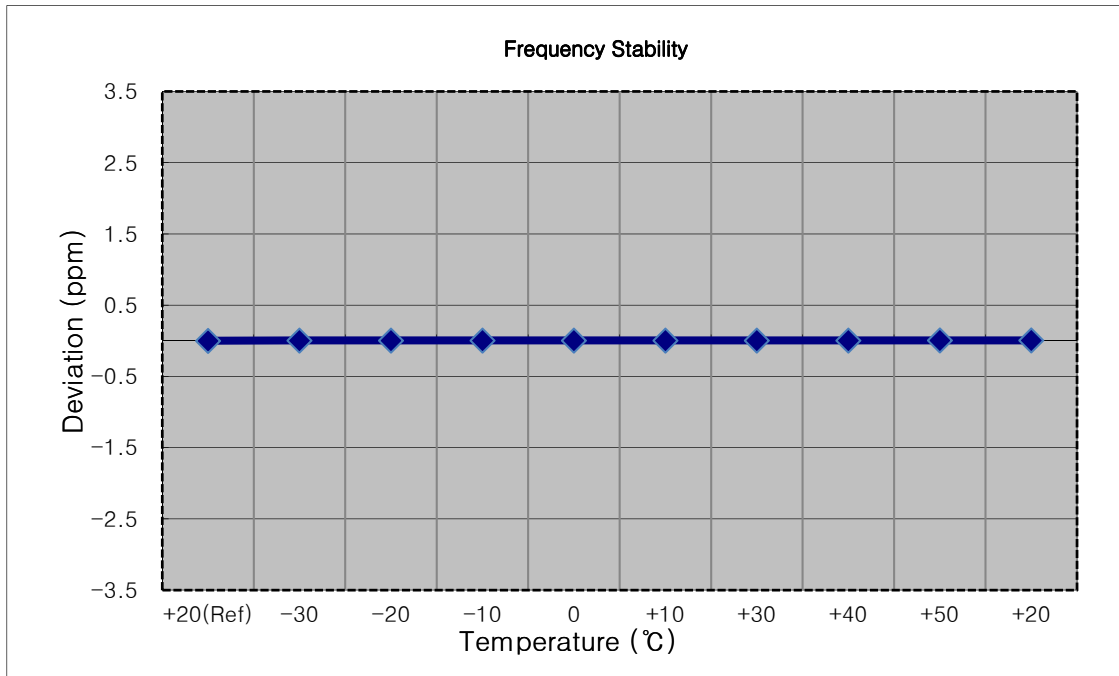

- MODE: LTE 41
- OPERATING FREQUENCY: 2680,000,000 Hz
- BANDWIDTH: 41490 (20 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2680 000 015	0.0	0.000 000	0.000
100%		-30	2680 000 029	14.1	0.000 001	0.005
100%		-20	2680 000 028	13.5	0.000 001	0.005
100%		-10	2680 000 029	13.8	0.000 001	0.005
100%		0	2680 000 030	15.7	0.000 001	0.006
100%		+10	2680 000 031	16.7	0.000 001	0.006
100%		+30	2680 000 029	14.4	0.000 001	0.005
100%		+40	2680 000 029	14.6	0.000 001	0.005
100%		+50	2680 000 029	14.2	0.000 001	0.005
85%	3.40	+20	2680 000 031	16.0	0.000 001	0.006

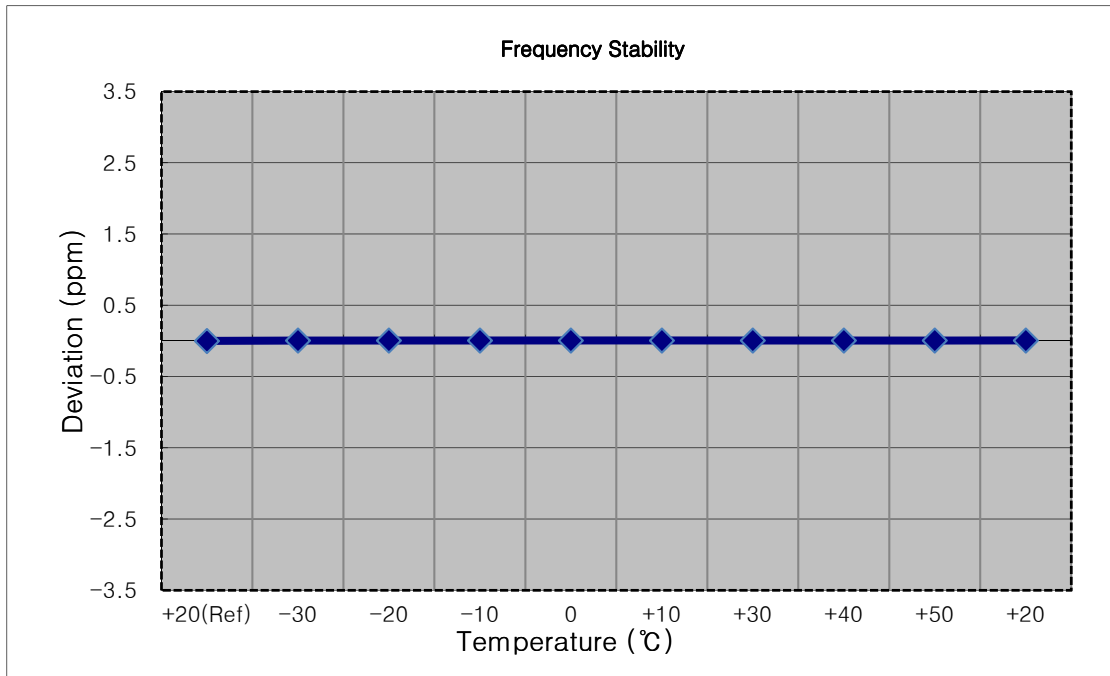

8.7 GEO-LOCATION MECHANISM

The device uses a geo-location mechanism based on the cellular MCC codes in order to only enable certain LTE bands when the device is not in the USA.

The validation of this mechanism is provided below. The device was configured for cellular communications to a test set and the MCC code was adjusted on the test set between the US MCC and then an MCC code valid for a country where the LTE band is supported.

Band	MCC = USA	MCC = non US
7	Did not connect	Connected (Canada)
38	Did not connect	Connected (Japan)
40	Did not connect	Connected (Japan)

The verification tests confirmed the operational of the geo-location mechanism.

Verification test

**Connected(LTE B7)
(MCC = Canada)**

The screenshot shows the following data:

Parameter	Value
Carrier Frequency	2535.000001 MHz
Carrier Frequency Error	Avg: 0.0010, Max: 0.0088, Min: -0.0048 kHz
Cell ID	0
MCC	302
MNC	220
TAC	0001 H
IMSI	001010123456789
Paging IMSI	Auto
C-RNTI	AAAA H
Temporary C-RNTI for Handover	AAAA H
SIM Model Number	User
Authentication	On

Additional visible information includes: Date/Time: 2018/06/22 09:42; Status: Connected; Mode: Phone-2 ---, Phone-1 LTE; Measurement: UE Power: 23.5 dBm; Meas. Count: 10/10.

Connected(LTE B38)
(MCC = Japan)

2018/06/22 10:00 Connected Phone-2 Phone-1
<Fundamental Measurement> Output Main Continuous LTE

Parameter Fundamental UE Report Band Cal

Measuring UE Power : 24.3 dBm

Modulation Analysis View (Meas. Count : 10 / 10)

Carrier Frequency Avg. 2595.000006 MHz

Carrier Frequency Error	Avg.	Max.	Min.	Limit
	0.0059	0.0104	0.0003	
	0.00	0.00	0.00	nan

Call Processing Parameter

Base Station Identity

Cell ID	0
MCC	440
MNC	01
TAC	0001 H

Mobile Station Identity

IMSI	001010123456789
Paging IMSI	Auto
C-RNTI	AAAA H
Temporary C-RNTI for Handover	AAAA H

SIM Model Number User

Authentication On

Parameter

- Common
- Physical Channel
- Call Processing
- TX Measurement Setup
- RX Measurement Setup
- Fundamental Measurement

1 | 2 | 3 | 4

Connected(LTE B40)
(MCC = Japan)

2018/06/22 09:46 Connected Phone-2 Phone-1
<Fundamental Measurement> Output Main Continuous --- LTE

Parameter Fundamental UE Report Band Cal

Measuring UE Power : 24.2 dBm Parameter
(Meas. Count : 10 / 10)

Modulation Analysis View
Carrier Frequency Avg. 2350.000001 MHz
Carrier Frequency Error Avg. Max. Min. Limit
0.0005 0.0083 -0.0044 kHz

Call Processing Parameter

Base Station Identity
Cell ID 0
MCC 440
MNC 01
TAC 0001 H

Mobile Station Identity
IMSI 001010123456789
Paging IMSI Auto
C-RNTI AAAA H
Temporary C-RNTI for Handover AAAA H

SIM Model Number User
Authentication On

1 2 3 4

**Did not connect(LTE B7)
(MCC = Canada)**

2018/06/22 09:52 Idle Phone-2 Phone-1
<Fundamental Measurement> Output Main Continuous --- LTE

Parameter Fundamental UE Report Band Cal

Measuring UE Power : -24.2 dBm

Power Measurement (Meas. Count : 1/ 1)

	Avg.	Max.	Min.	Limit
TX Power	-42.60	-42.60	-42.60	dBm 20.3 to 25.7 dBm
Channel Power	-43.06	-43.06	-43.06	dBm

Call Processing Parameter

Base Station Identity

Cell ID 0

MCC 311

MNC 01

TAC 0001 H

Mobile Station Identity

IMSI 001010123456789

Paging IMSI Auto

C-RNTI AAAA H

Temporary C-RNTI for Handover AAAA H

SIM Model Number User

Authentication On

Parameter

Common

Physical Channel

Call Processing

TX Measurement Setup

RX Measurement Setup

Fundamental Measurement

1 2 3 4

Did not connect(LTE B38)
(MCC = Japan)

2018/06/22 09:51 Idle Phone-2 Phone-1
<Fundamental Measurement> Output Main Continuous --- LTE

Parameter Fundamental UE Report

Measuring UE Power : -24.5 dBm

Power Measurement (Meas. Count : 1 / 1)

	Avg.	Max.	Min.	Limit
TX Power	-42.95	-42.95	-42.95 dBm	20.3 to 25.7 dBm
Channel Power	-43.40	-43.40	-43.40 dBm	

Call Processing Parameter

Base Station Identity

Cell ID 0

MCC 311

MNC 01

TAC 0001 H

Mobile Station Identity

IMSI 001010123456789

Paging IMSI Auto

C-RNTI AAAA H

Temporary C-RNTI for Handover AAAA H

SIM Model Number User

Authentication On

Parameter

- Common
- Physical Channel
- Call Processing
- TX Measurement Setup
- RX Measurement Setup
- Fundamental Measurement

1 | 2 | 3 | 4

Did not connect(LTE B40)
(MCC = Japan)

2018/06/22 09:53 Idle Phone-2 Phone-1
<Fundamental Measurement> Output Main Continuous LTE

Parameter Fundamental UE Report Band Cal.

Measuring UE Power : -24.2 dBm

Power Measurement (Meas. Count : 1/ 1)

	Avg.	Max.	Min.	Limit
TX Power	-42.75	-42.75	-42.75	20.3 to 25.7 dBm
Channel Power	-43.22	-43.22	-43.22	

Call Processing Parameter

Base Station Identity

Cell ID	0
MCC	311
MNC	01
TAC	0001 H

Mobile Station Identity

IMSI	001010123456789
Paging IMSI	Auto
C-RNTI	AAAA H
Temporary C-RNTI for Handover	AAAA H


SIM Model Number User
Authentication On

Parameter
Common
Physical Channel
Call Processing
TX Measurement Setup
RX Measurement Setup
Fundamental Measurement


1 | 2 | 3 | 4

9. TEST PLOTS


BAND 41. Occupied Bandwidth Plot (5 MHz Ch.40620 QPSK RB 25)

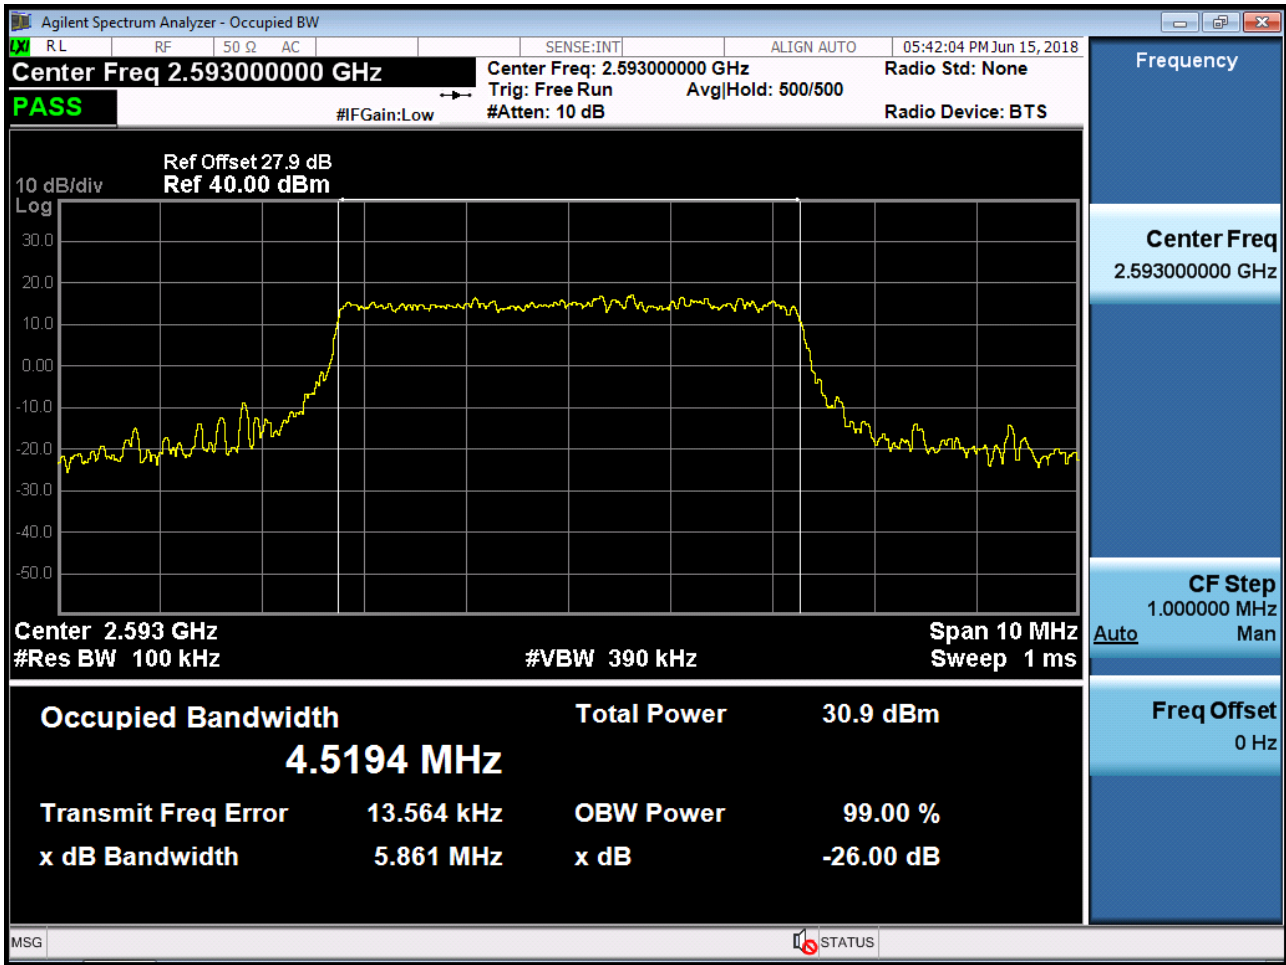


BAND 41. Occupied Bandwidth Plot (5 MHz Ch.40620 16-QAM RB 25)

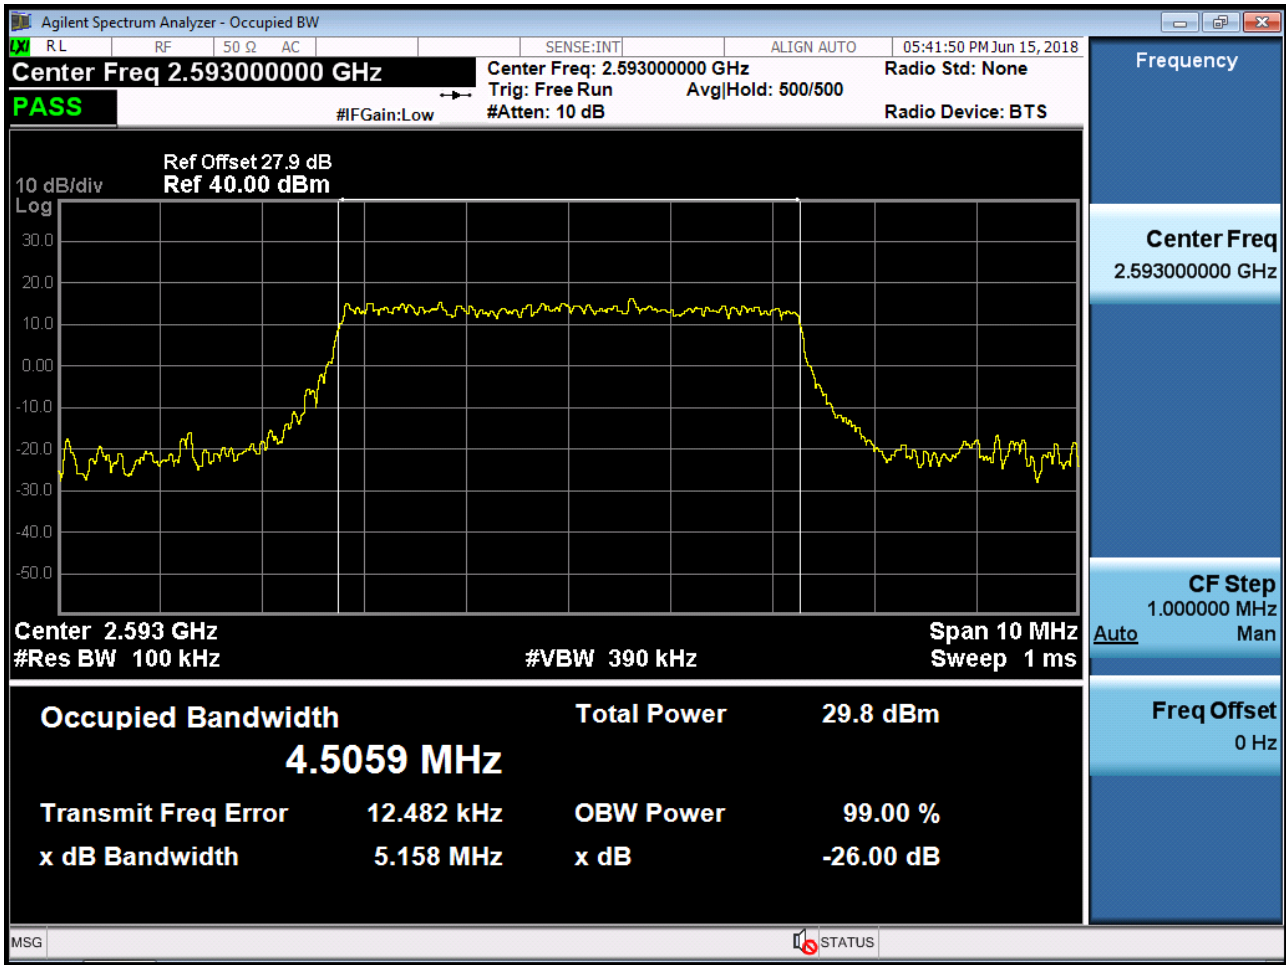


BAND 41. Occupied Bandwidth Plot (10 MHz Ch.40620 QPSK RB 50)

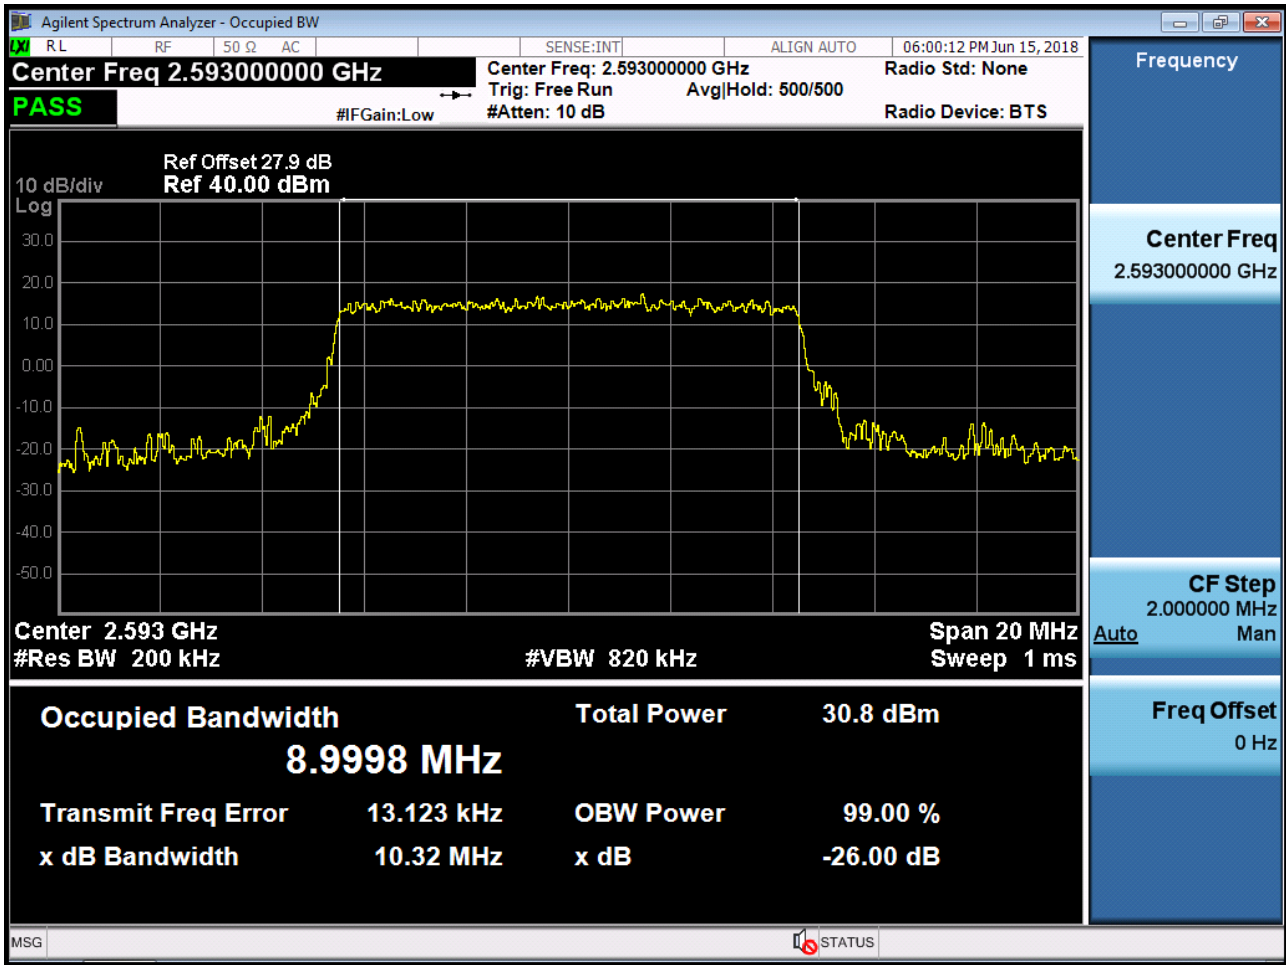


BAND 41. Occupied Bandwidth Plot (10 MHz Ch.40620 16-QAM RB 50)

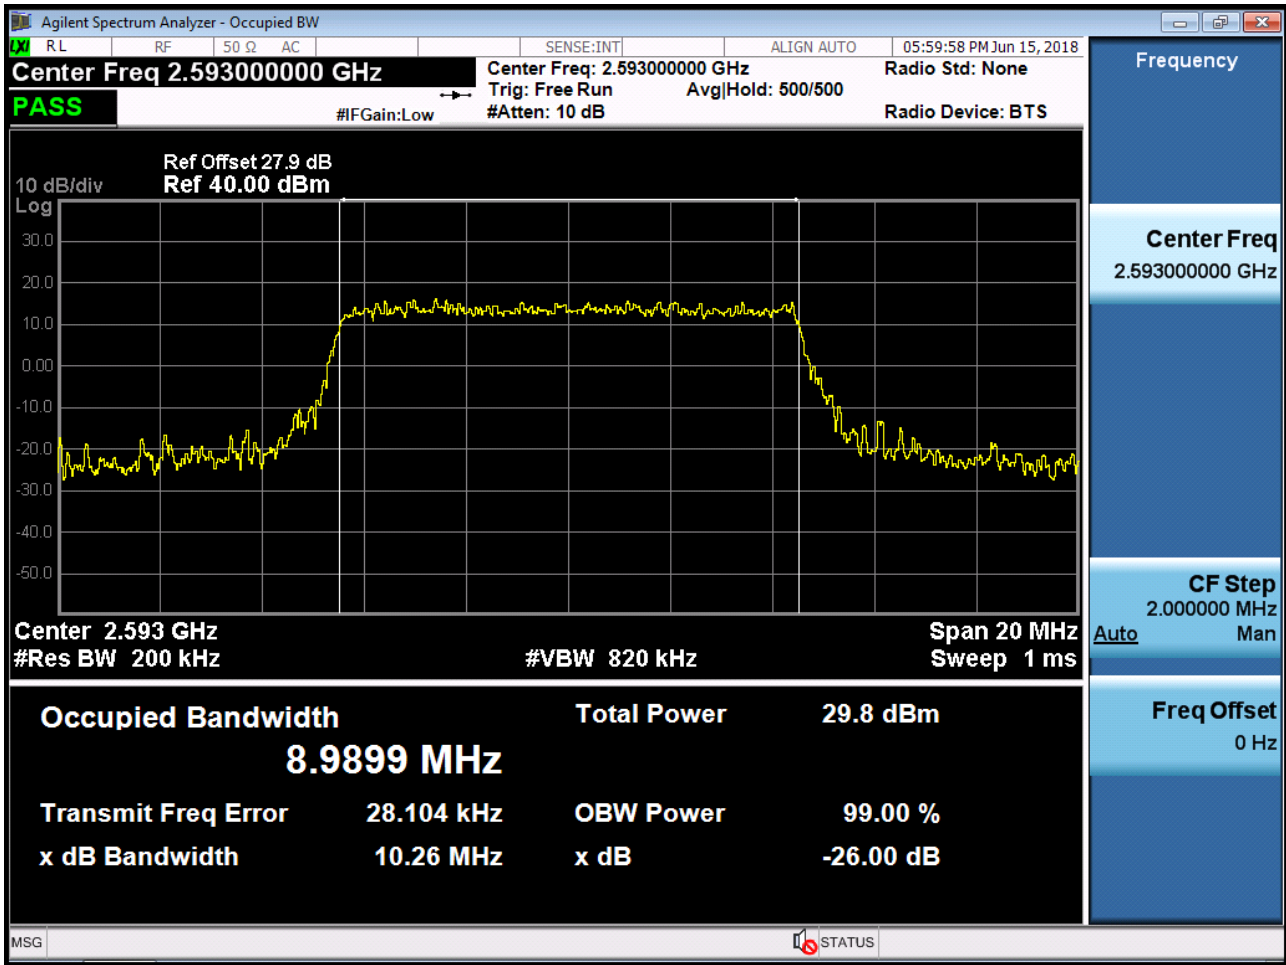


BAND 41. Occupied Bandwidth Plot (15 MHz Ch.40620 QPSK RB 75)

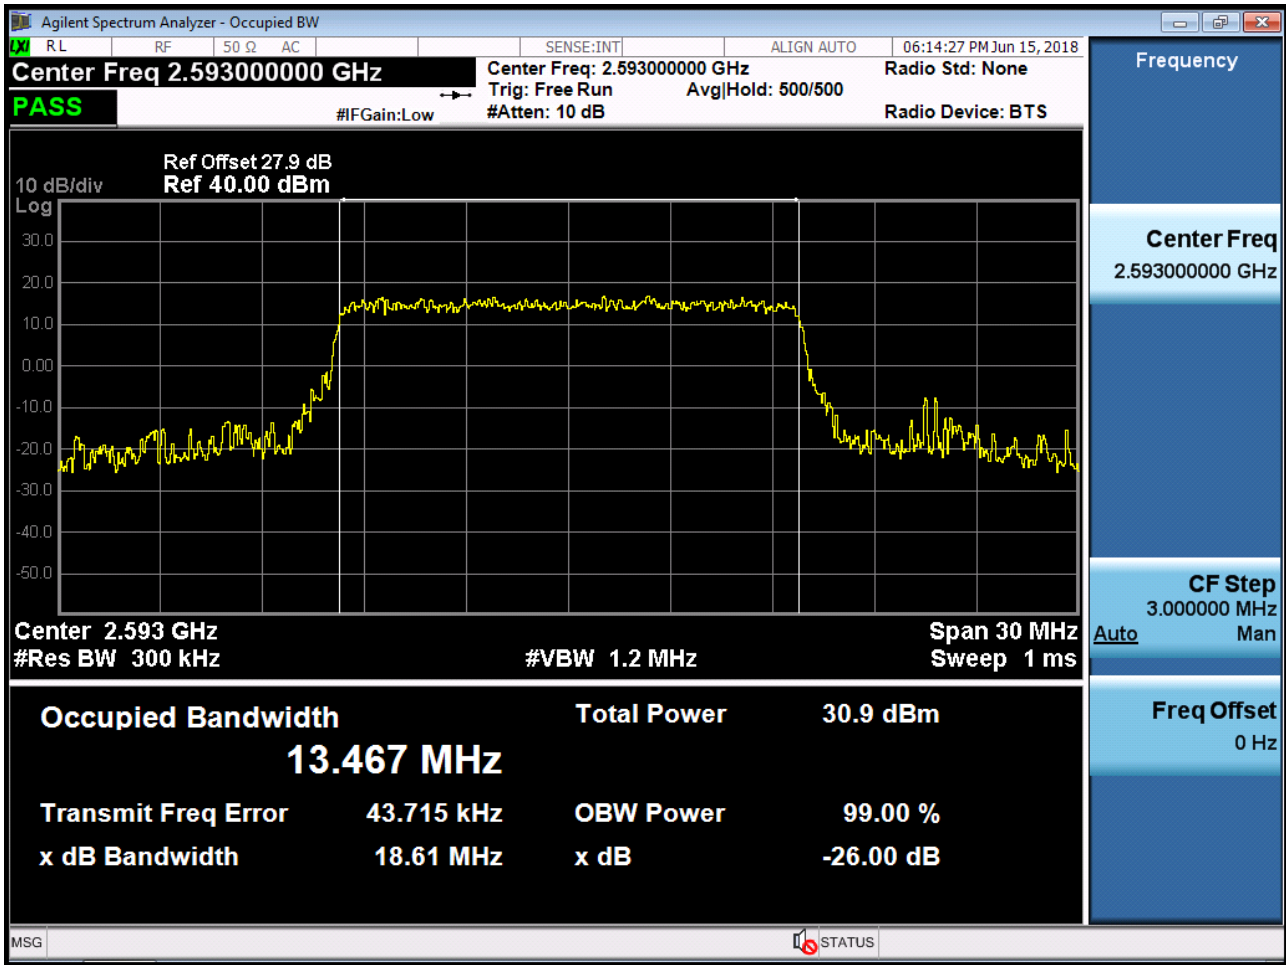


BAND 41. Occupied Bandwidth Plot (15 MHz Ch.40620 16-QAM RB 75)

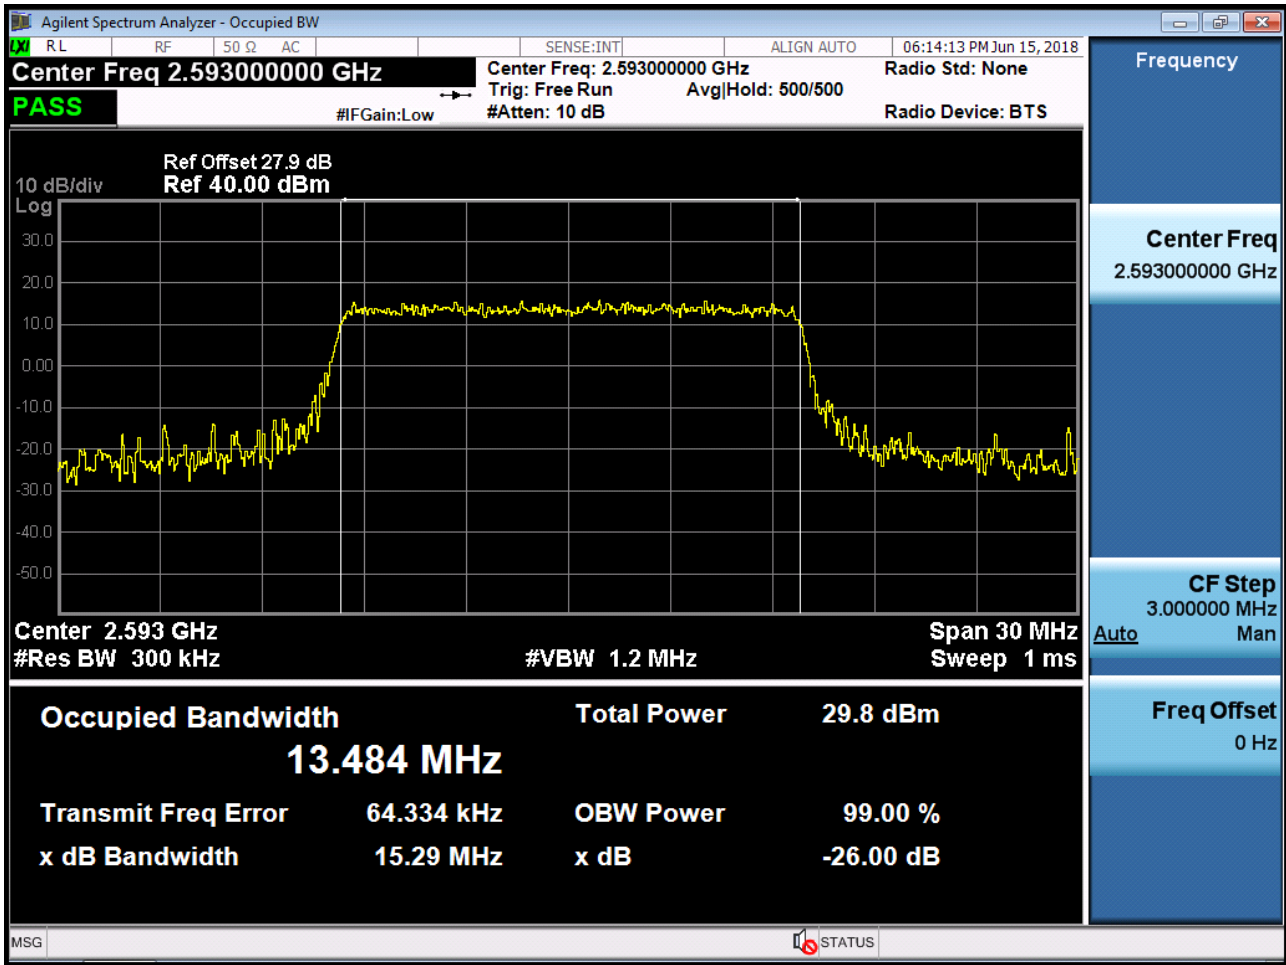


BAND 41. Occupied Bandwidth Plot (20 MHz Ch.40620 QPSK RB 100)

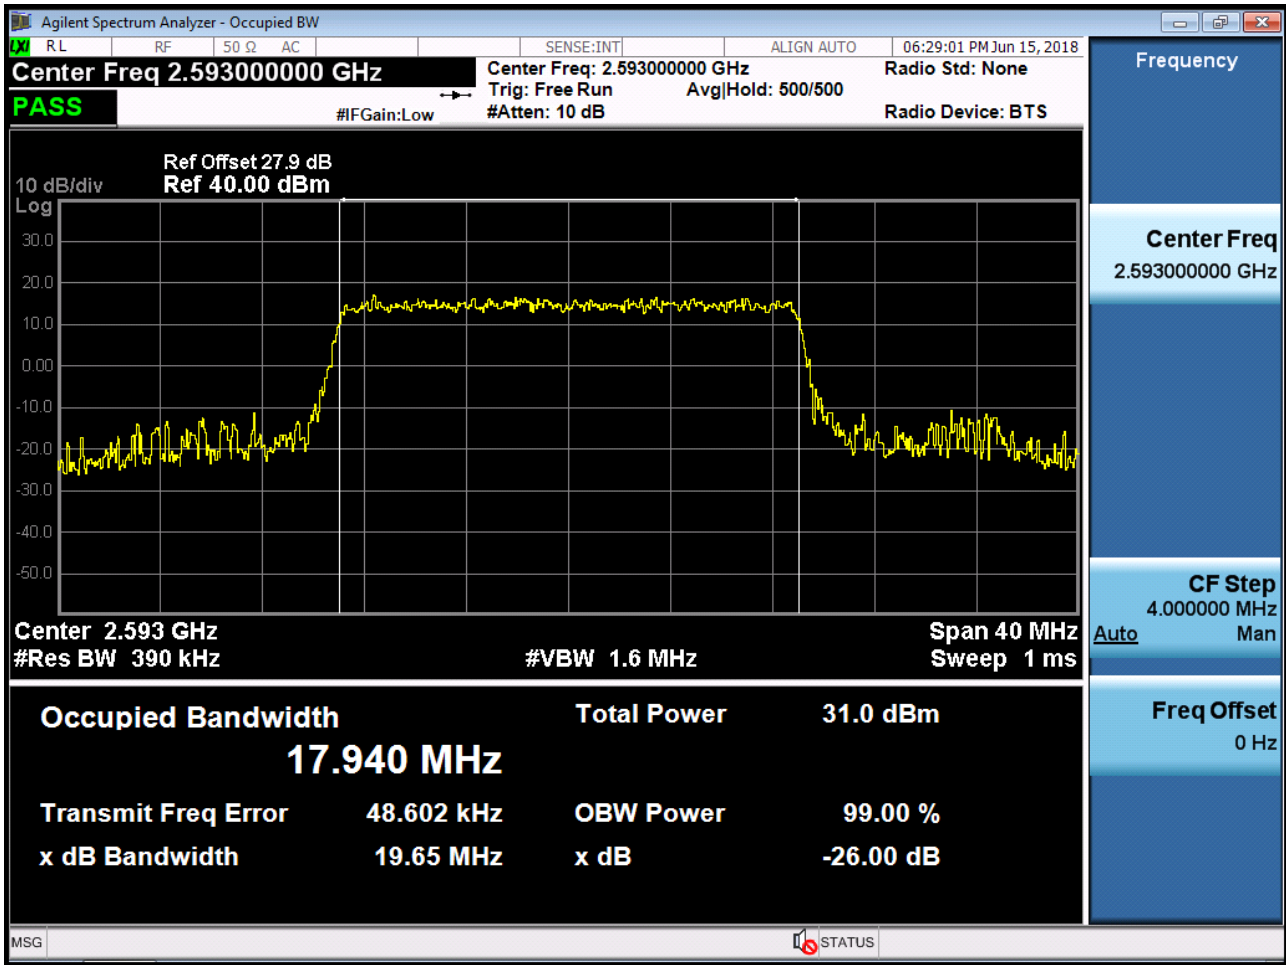

BAND 41. Occupied Bandwidth Plot (20 MHz Ch.40620 16-QAM RB 100)

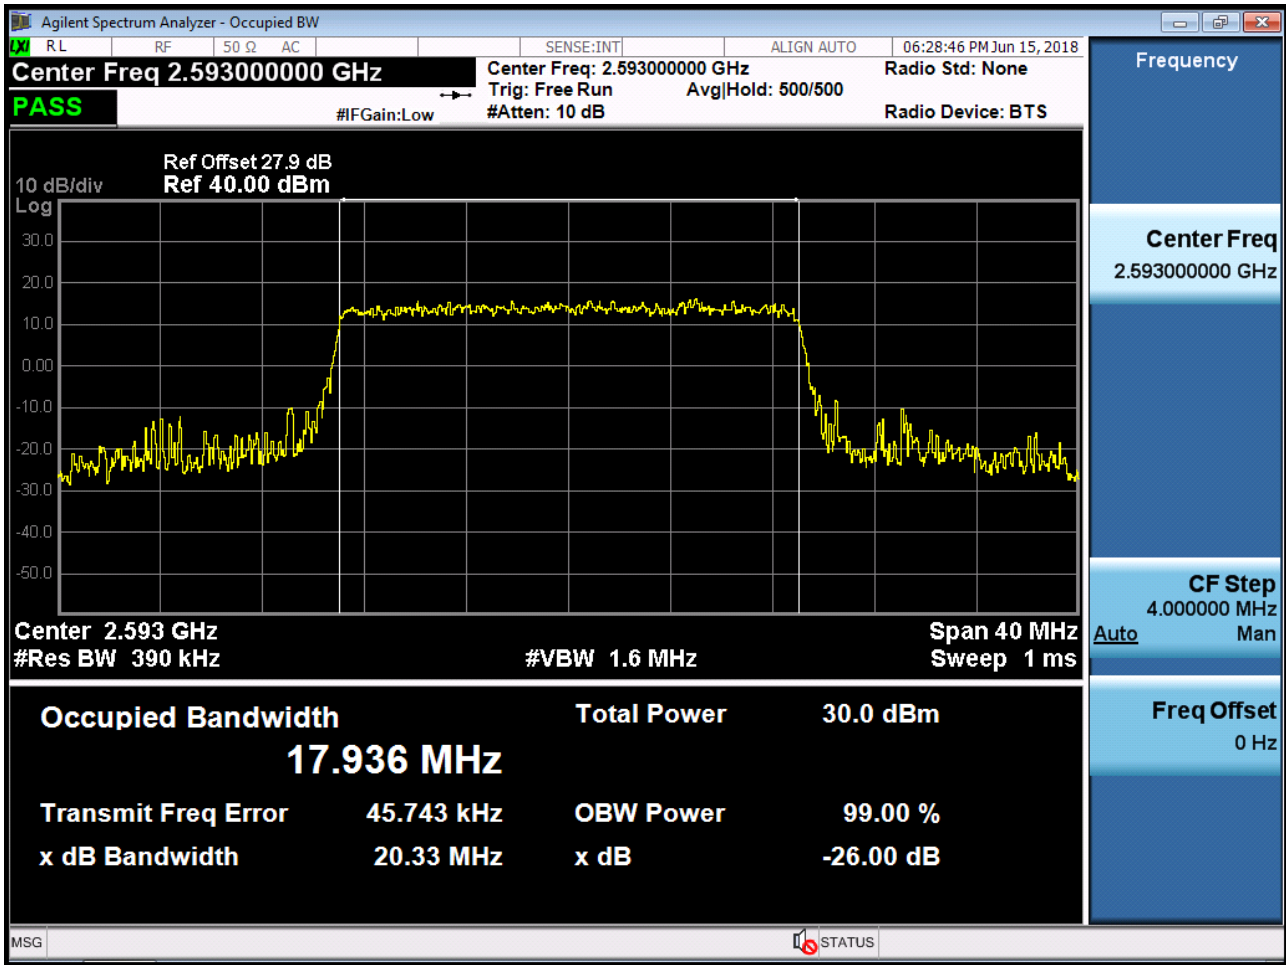

BAND 41. Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 25)-1

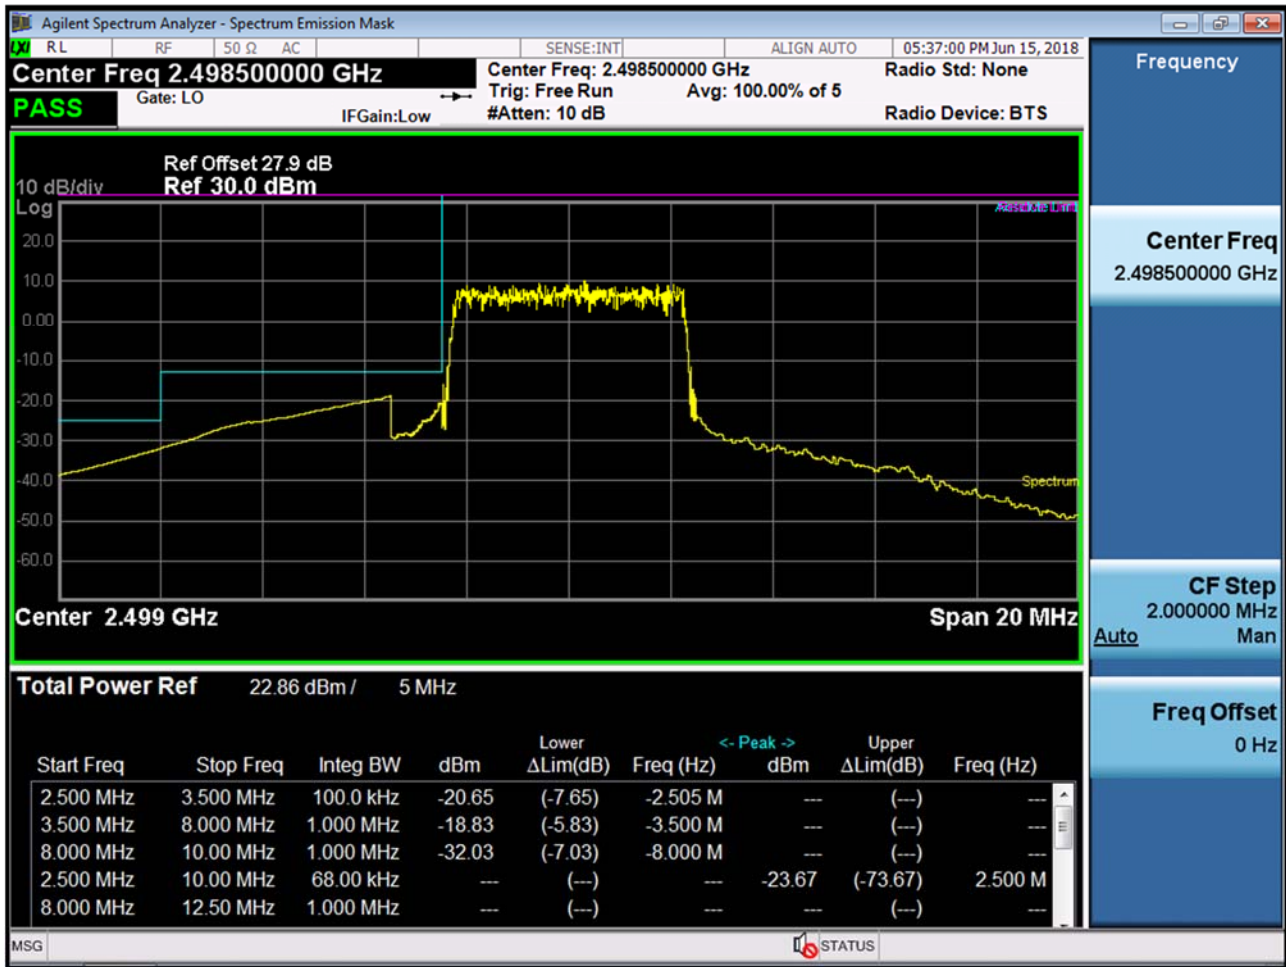

BAND 41. Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 25)-2

