



**FCC CFR47 PART 15 SUBPART C**

**Bluetooth**

**CERTIFICATION TEST REPORT**

**FOR**

**GSM/WCDMA Phone + BT/BLE and DTS b/g/n**

**MODEL NUMBER : SM-J320H/DS**

**FCC ID: A3LSMJ320H**

**REPORT NUMBER: 15K22504-E3**

**ISSUE DATE: DEC 24, 2015**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.**  
**129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,**  
**GYEONGGI-DO, 16677, KOREA**

*Prepared by*  
**UL Korea, Ltd. Suwon Laboratory**  
**218 Maeyeong-ro, Yeongtong-gu,**  
**Suwon-si, Gyeonggi-do, 16675, Korea**  
**TEL: (031) 337-9902**  
**FAX: (031) 213-5433**



---

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	12/24/15	Initial issue	Junwhan Lee

---

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>5</b>
<b>2. TEST METHODOLOGY</b> .....	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	6
4.2. <i>SAMPLE CALCULATION</i> .....	6
4.3. <i>MEASUREMENT UNCERTAINTY</i> .....	6
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>7</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	7
5.2. <i>MAXIMUM OUTPUT POWER</i> .....	7
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	7
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	7
5.5. <i>DESCRIPTION OF TEST SETUP</i> .....	8
<b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>10</b>
<b>7. SUMMARY TABLE</b> .....	<b>11</b>
<b>8. ANTENNA PORT TEST RESULTS</b> .....	<b>12</b>
8.1. <i>20 dB AND 99% BANDWIDTH</i> .....	12
8.1.1. <i>BASIC DATA RATE GFSK MODULATION</i> .....	12
8.1.2. <i>ENHANCED DATA RATE Pi/4-DQPSK MODULATION</i> .....	12
8.1.3. <i>ENHANCED DATA RATE 8PSK MODULATION</i> .....	12
8.1.4. <i>20 dB AND 99% BANDWIDTH PLOTS</i> .....	13
8.2. <i>HOPPING FREQUENCY SEPARATION</i> .....	16
8.3. <i>NUMBER OF HOPPING CHANNELS</i> .....	18
8.4. <i>AVERAGE TIME OF OCCUPANCY</i> .....	21
8.5. <i>OUTPUT POWER</i> .....	25
8.5.1. <i>BASIC DATA RATE GFSK MODULATION</i> .....	25
8.5.2. <i>ENHANCED DATA RATE Pi/4-DPSK MODULATION</i> .....	25
8.5.3. <i>ENHANCED DATA RATE 8PSK MODULATION</i> .....	25
8.5.4. <i>OUTPUT POWER PLOTS</i> .....	26
8.6. <i>AVERAGE POWER</i> .....	29
8.6.1. <i>BASIC DATA RATE GFSK MODULATION</i> .....	29
8.6.2. <i>DATA RATE PI/4-DQPSK MODULATION</i> .....	29
8.6.3. <i>ENHANCED DATA RATE 8PSK MODULATION</i> .....	29
8.7. <i>CONDUCTED SPURIOUS EMISSIONS</i> .....	30
8.7.1. <i>BASIC DATA RATE GFSK MODULATION</i> .....	31

---

<b>9. RADIATED TEST RESULTS.....</b>	<b>37</b>
9.1. LIMITS AND PROCEDURE.....	37
9.2. TRANSMITTER ABOVE 1 GHz.....	38
9.2.1. BASIC DATA RATE GFSK MODULATION .....	38
9.2.2. ENHANCED DATA RATE 8PSK MODULATION .....	48
9.3. WORST-CASE BELOW 1 GHz .....	58
<b>10. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>60</b>
<b>11. SETUP PHOTOS.....</b>	<b>65</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** GSM/WCDMA Phone + BT/BLE and DTS b/g/n  
**MODEL NUMBER:** SM-J320H/DS  
**SERIAL NUMBER:** R31GB00F2NP (RADIATED); R31GB007VKP (CONDUCTED)  
**DATE TESTED:** DEC 15, 2015 - DEC 18, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



CY Choi  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input type="checkbox"/>	Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is GSM/WCDMA Phone + BT/BLE and DTS b/g/n.  
 This test report addresses the DSS (BT) operational mode.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2402 - 2480	Basic GFSK	Average	8.37	6.87
		Peak	8.99	7.92
	Enhanced Pi/4-DPSK	Average	7.92	6.19
		Peak	10.41	10.99
	Enhanced 8PSK	Average	7.92	6.20
		Peak	10.52	11.27

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -5.37 dBi.

### 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	ETA0U83EWE	DK1GA22VS/A-E	N/A
Data Cable	SAMSUNG	ECB-DU68WE	N/A	N/A
Earphone	SAMSUNG	EHS61ASFWE	N/A	N/A


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
1	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

### TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. EUT was set in the Hidden menu mode to enable BT communications.

**SETUP DIAGRAM FOR TESTS**

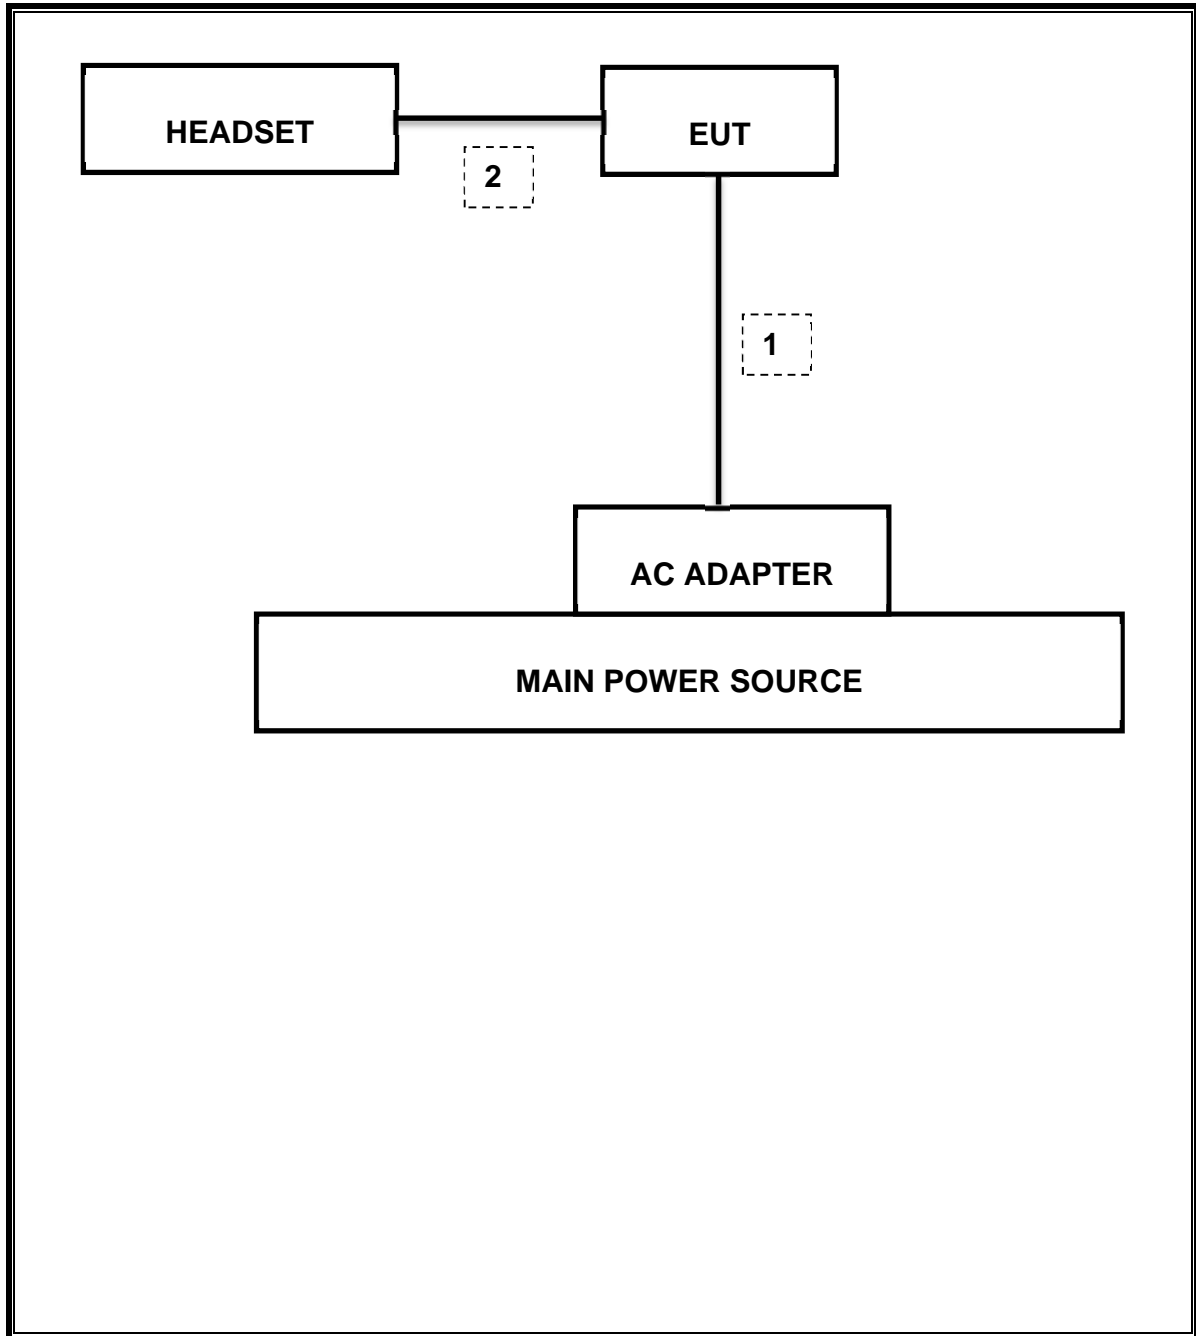

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	11-17-16
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-17
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-26-16
Antenna, Horn, 18 GHz	ETS	3115	00161451	05-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-17
Antenna, Horn, 40 GHz	ETS	3116C	00166155	09-23-16
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	08-24-17
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-18-16
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-18-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-19-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-19-16
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-18-16
Average Power Sensor	R&S	NRZ-Z91	102681	08-18-16
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-18-16
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-19-16
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-19-16
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-19-16
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	08-18-16
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	015	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	016	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	015	08-18-16
LISN	R&S	ENV-216	101836	08-19-16
LISN	R&S	ENV-216	101837	08-19-16
Combiner	WEINSCHTEL	1575	2154	08-20-16

## 7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	Occupied Band width (99%)	N/A	Conducted	Pass	1.193 MHz
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-40.828 dBm
15.247 (b)(1)	TX conducted output power	<21dBm		Pass	10.518 dBm (Peak)
15.247 (a)(1)	Hopping frequency separation	> 25KHz		Pass	1 MHz
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 0.4sec		Pass	0.35 sec
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	45.03 dBuV (PK)
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass	48.74 dBuV/m (AV)

## 8. ANTENNA PORT TEST RESULTS

### 8.1. 20 dB AND 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq$  1% of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS

##### 8.1.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	872.200	852.070
Mid	2441	892.400	853.840
High	2480	869.600	854.550
Worst		892.400	854.550

##### 8.1.2. ENHANCED DATA RATE Pi/4-DQPSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	1.259	1.165
Mid	2441	1.262	1.163
High	2480	1.263	1.164
Worst		1.263	1.165

##### 8.1.3. ENHANCED DATA RATE 8PSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	1.248	1.193
Mid	2441	1.250	1.164
High	2480	1.246	1.165
Worst		1.250	1.193

### 8.1.4. 20 dB AND 99% BANDWIDTH PLOTS


#### GFSK BANDWIDTH

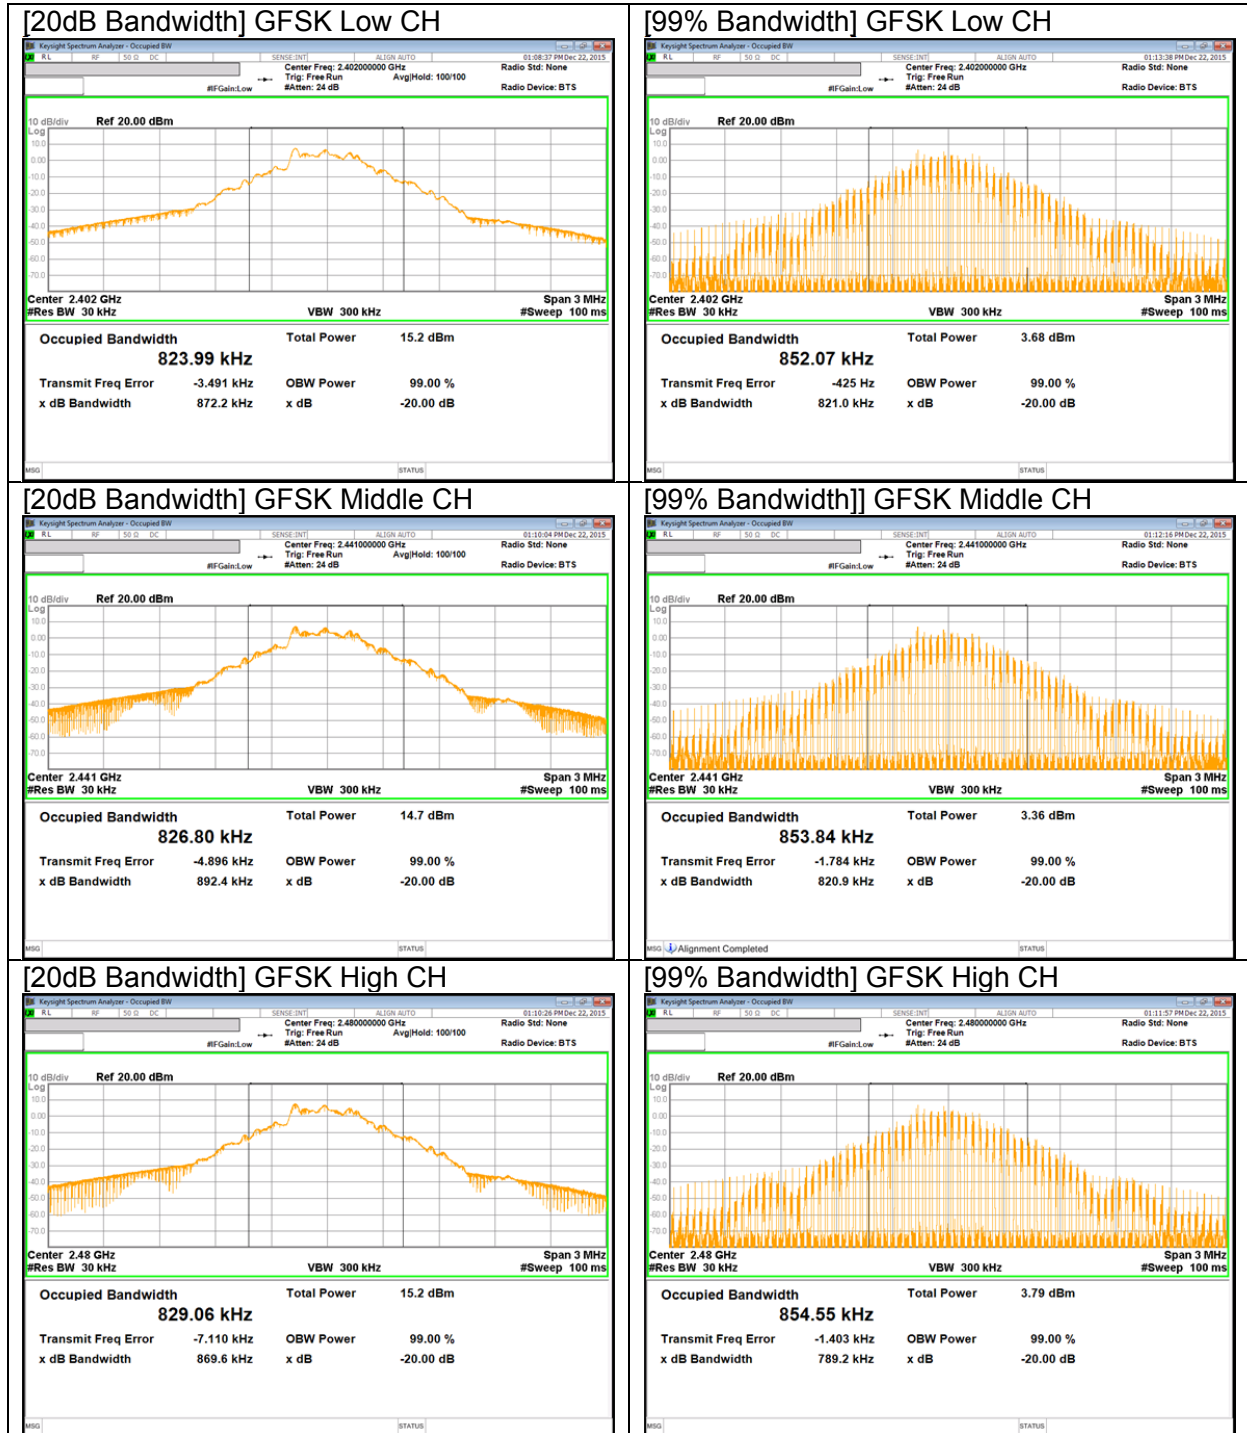

**Pi/4-DQPSK BANDWIDTH**

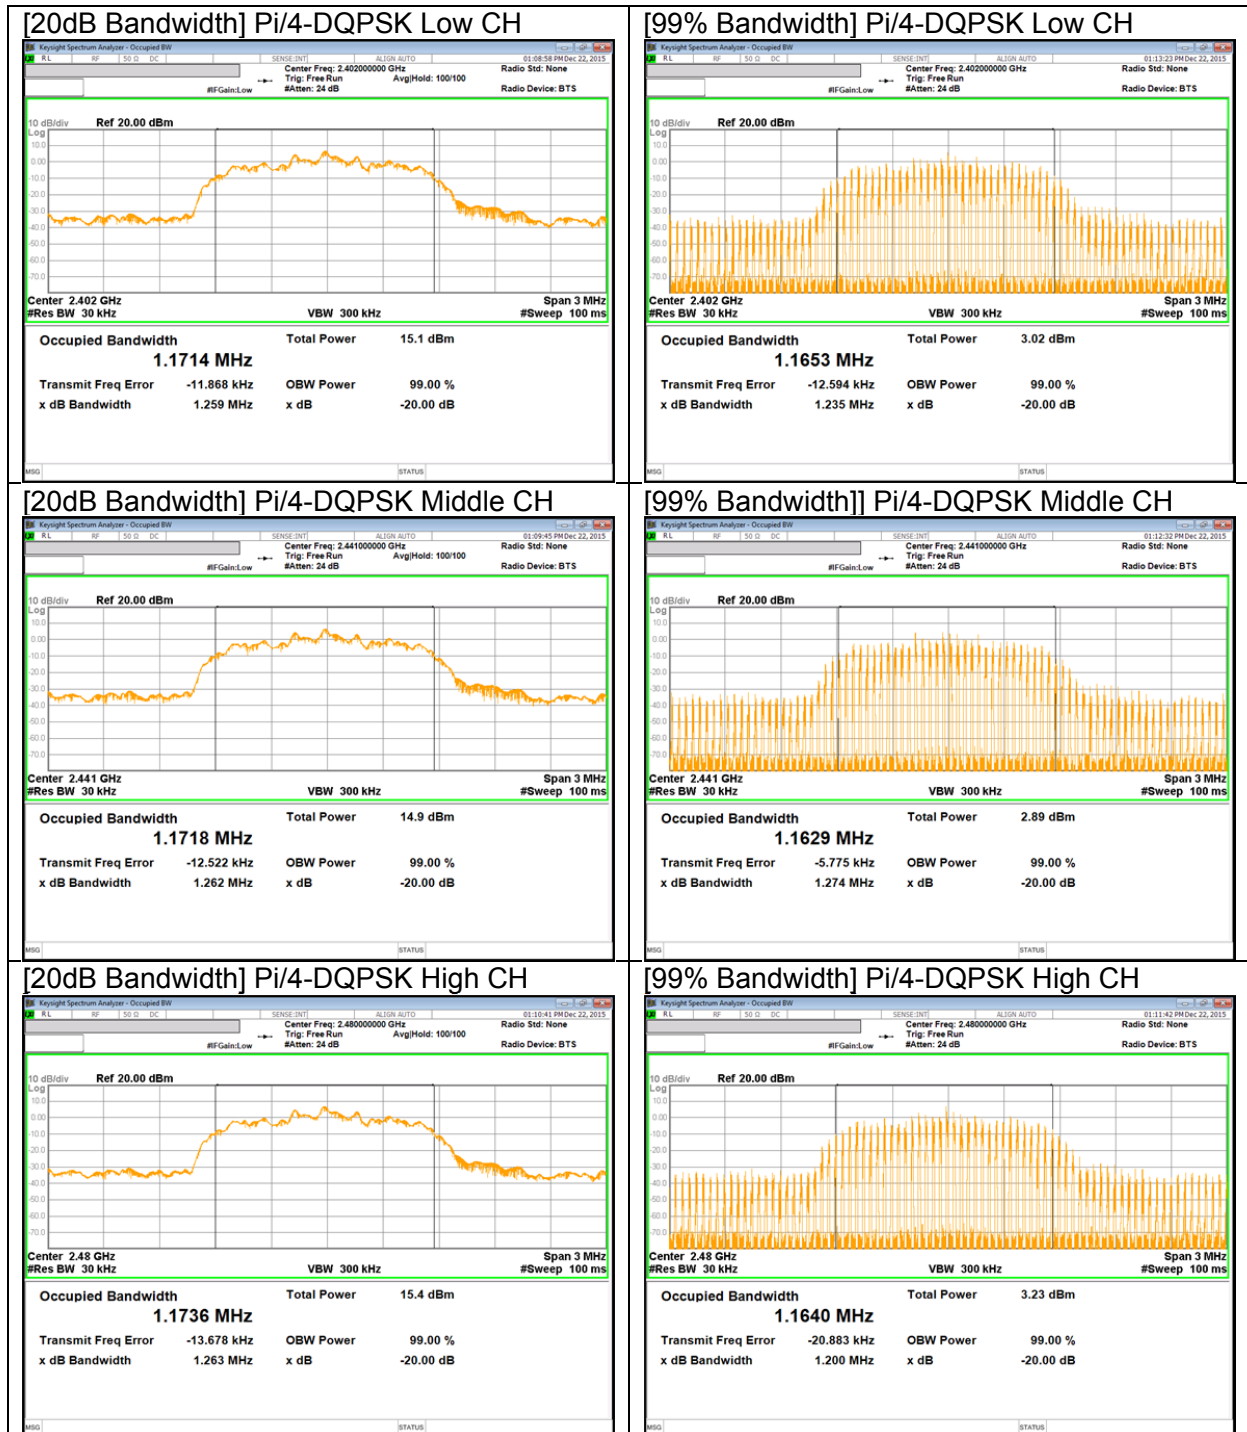

**8PSK BANDWIDTH**

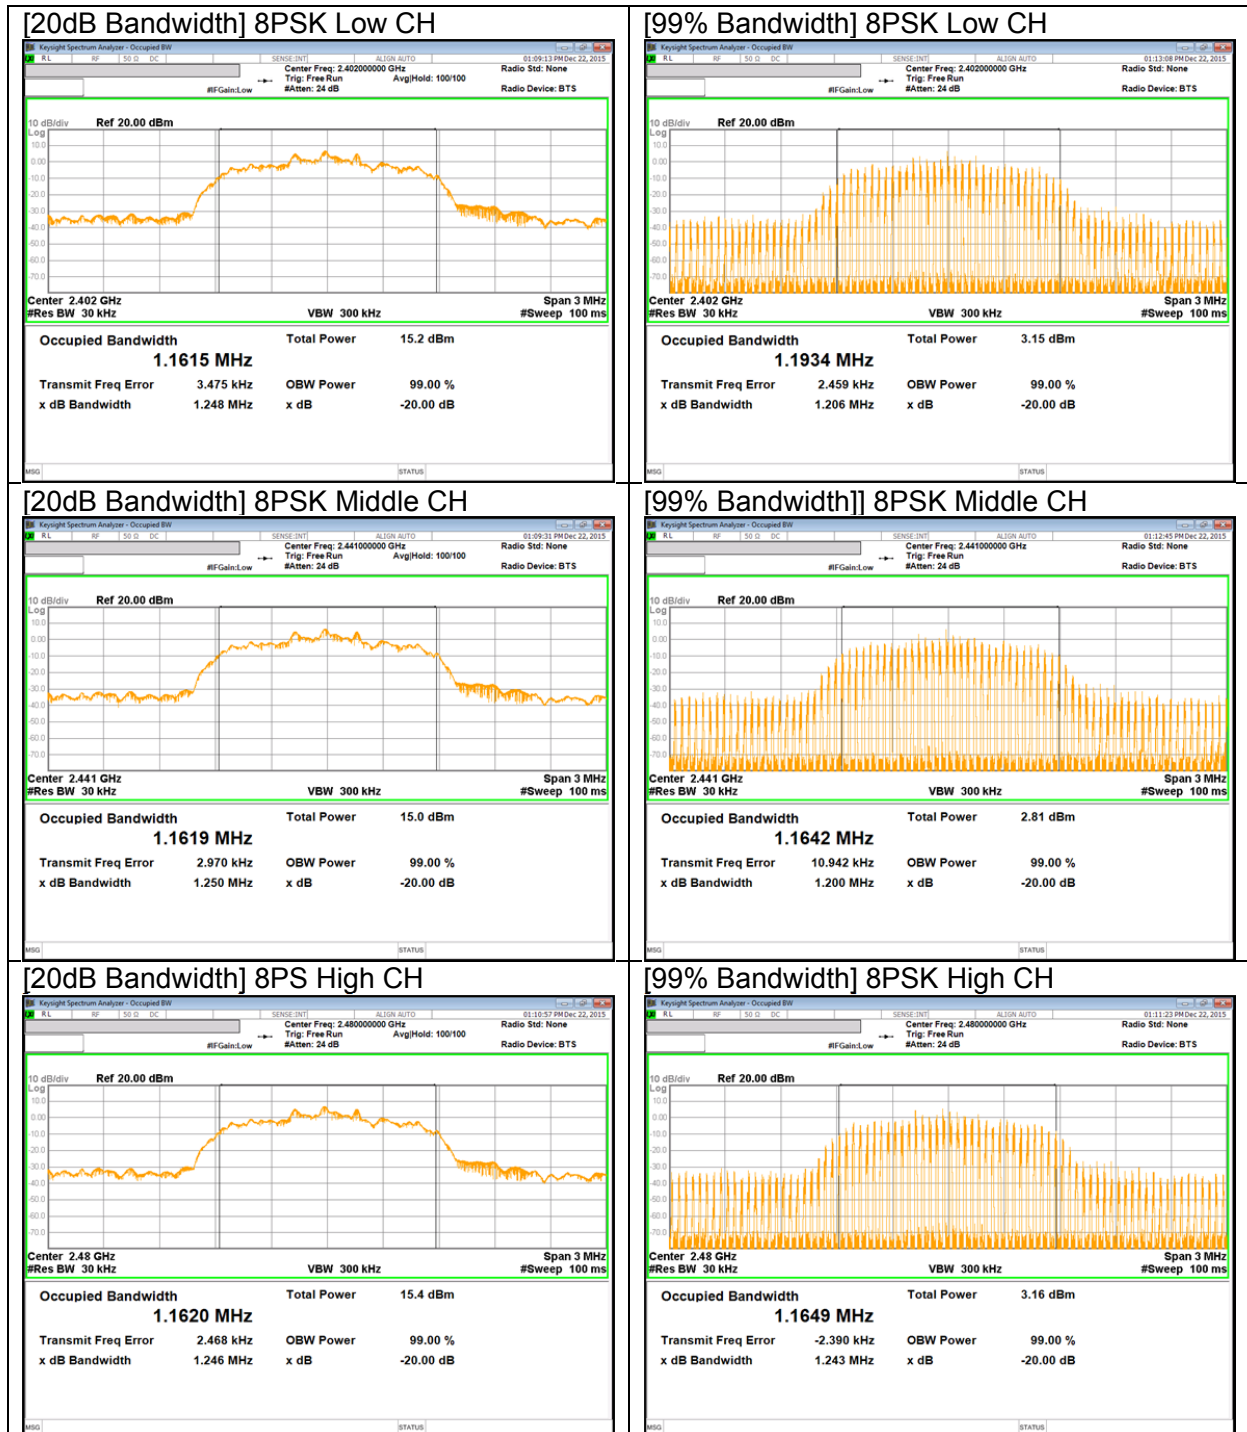

---

## 8.2. HOPPING FREQUENCY SEPARATION

### LIMIT

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

### RESULTS

**HOPPING FREQUENCY SEPARATION PLOT**

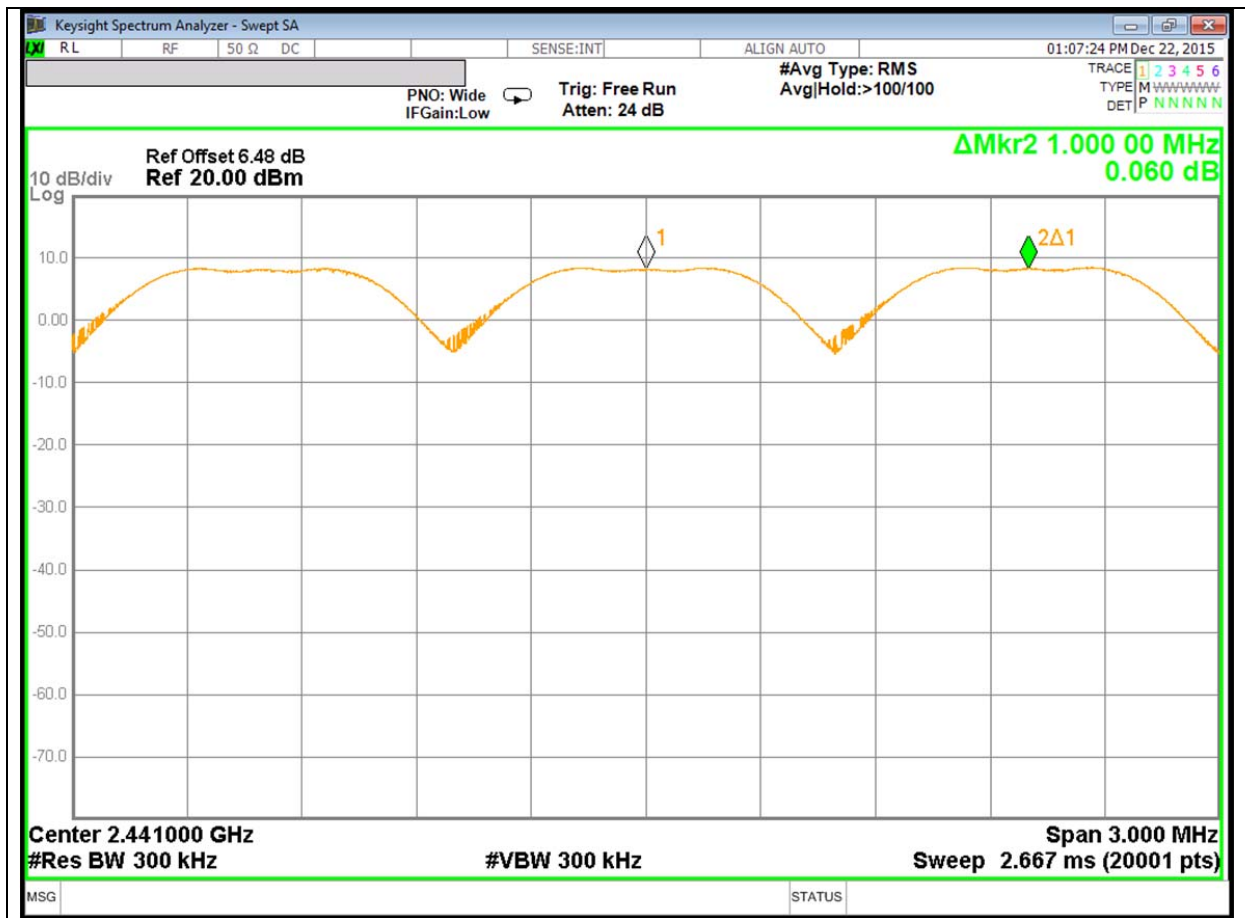

---

### **8.3. NUMBER OF HOPPING CHANNELS**

#### **LIMIT**

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

#### **TEST PROCEDURE**


DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.




#### **RESULTS**

Normal Mode: 79 Channels observed.

**NUMBER OF HOPPING CHANNELS PLOTS**

**NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)**

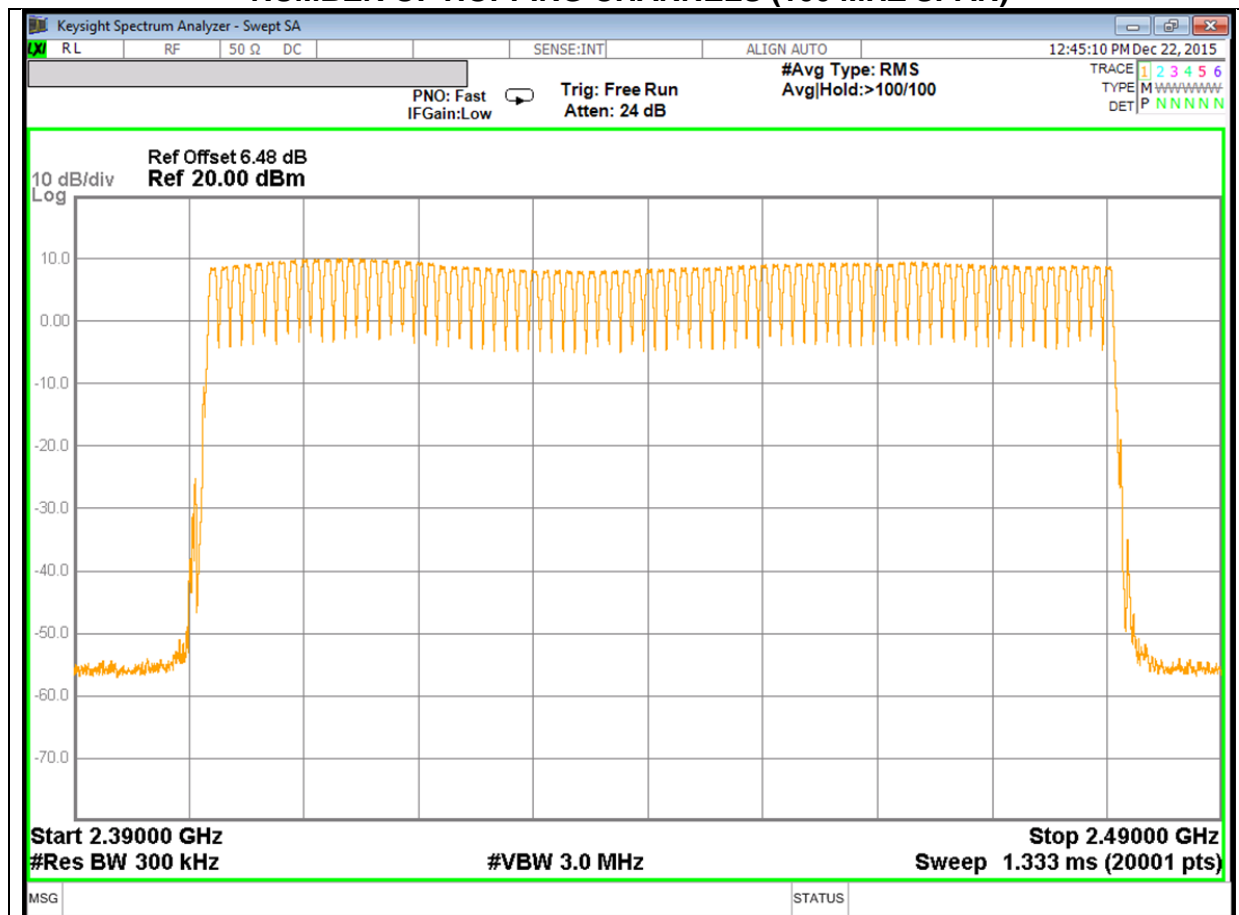
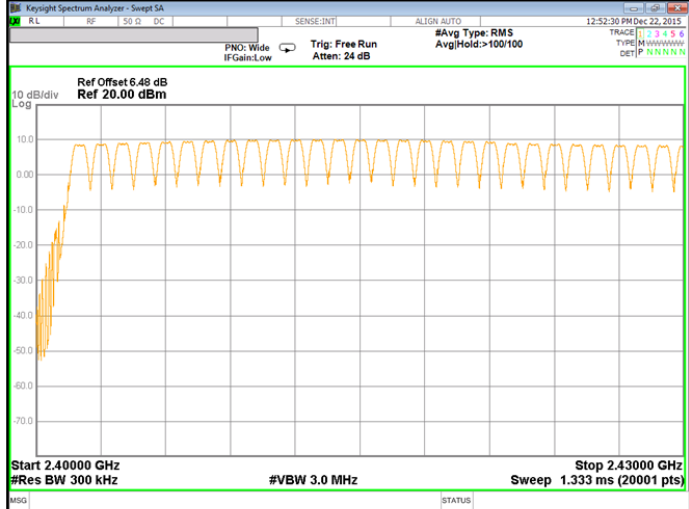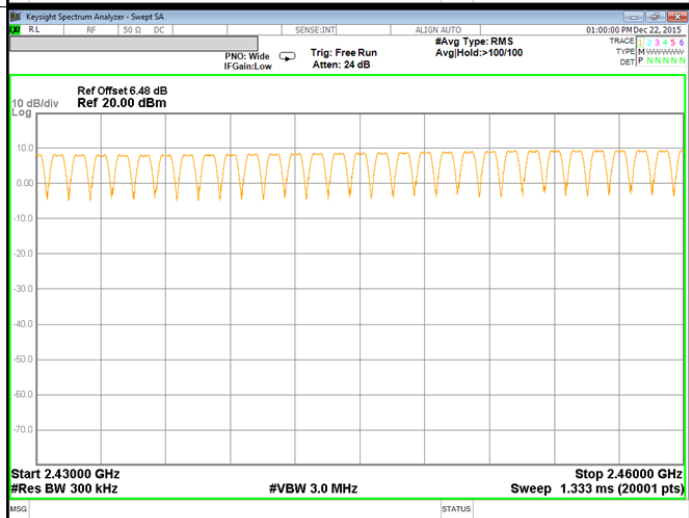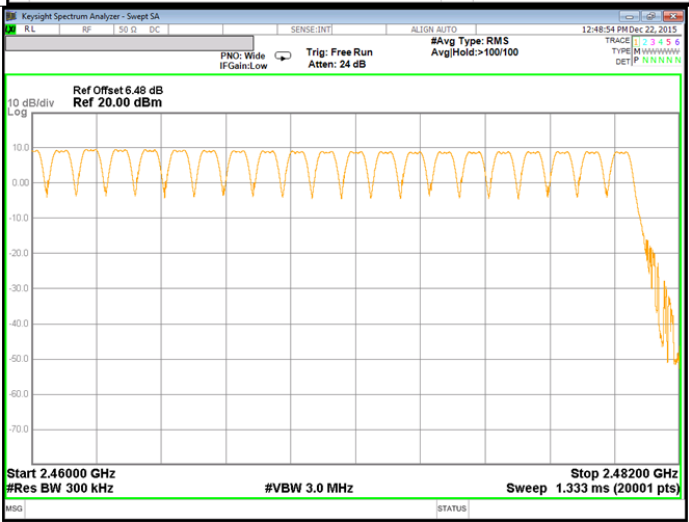
<p>1<sup>st</sup> SEGMENT 2400 to 2430 MHz</p>	
<p>2<sup>nd</sup> SEGMENT 2430 to 2460 MHz</p>	
<p>3<sup>rd</sup> SEGMENT 2460 to 2482 MHz</p>	

## 8.4. AVERAGE TIME OF OCCUPANCY

### LIMIT

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$ .


### RESULTS

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK Normal					
DH1	0.411	32	0.131456	0.4	-0.2685
DH3	1.667	17	0.283390	0.4	-0.1166
DH5	2.914	12	0.349680	0.4	-0.0503
GFSK AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK AFH					
DH1	0.411	8	0.032864	0.4	-0.36714
DH3	1.667	4.25	0.070848	0.4	-0.32915
DH5	2.914	3	0.087420	0.4	-0.31258


**DH1**

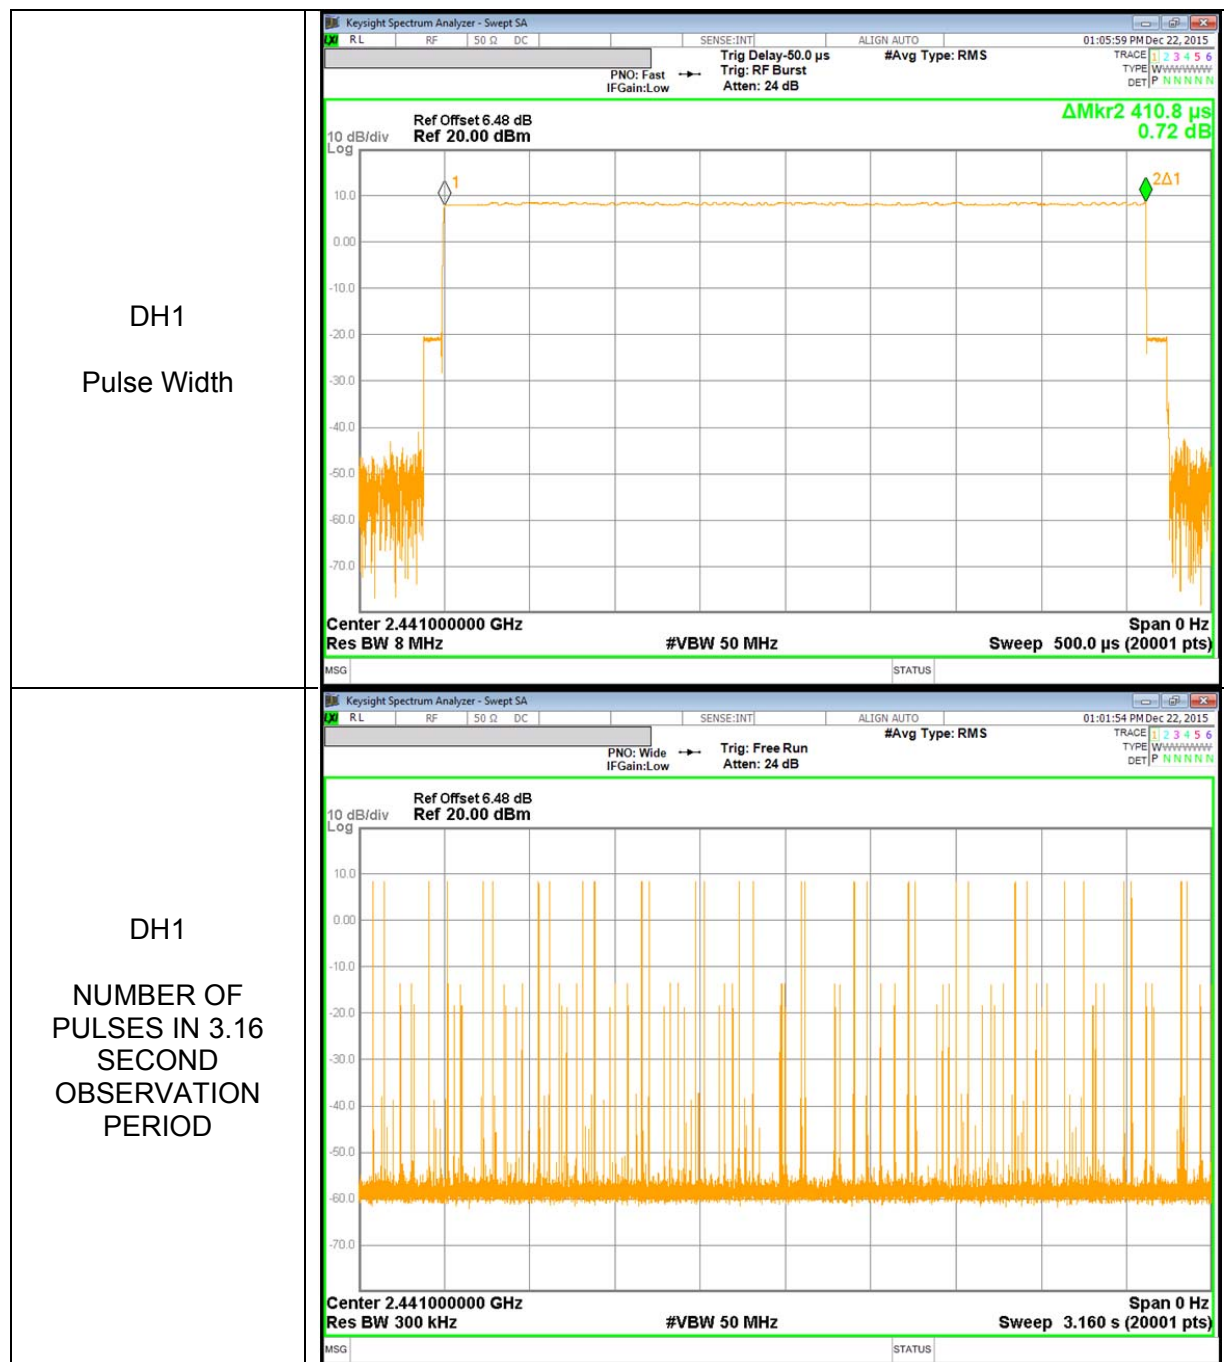

**DH3**

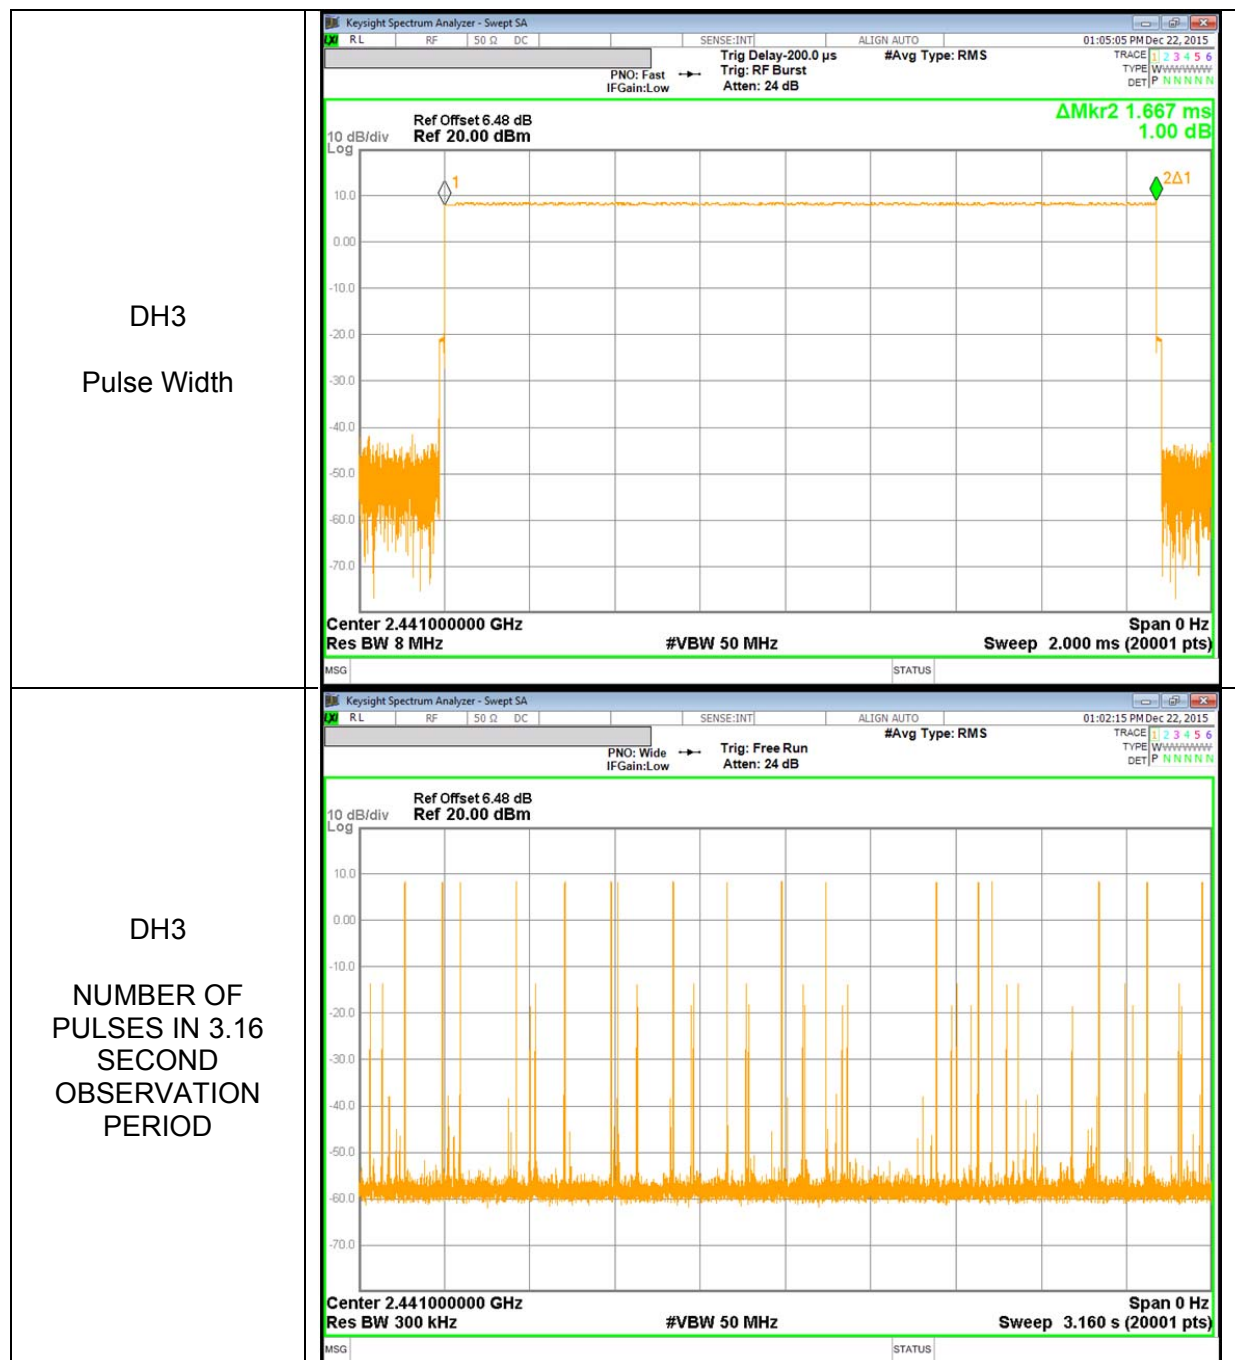

**DH5**

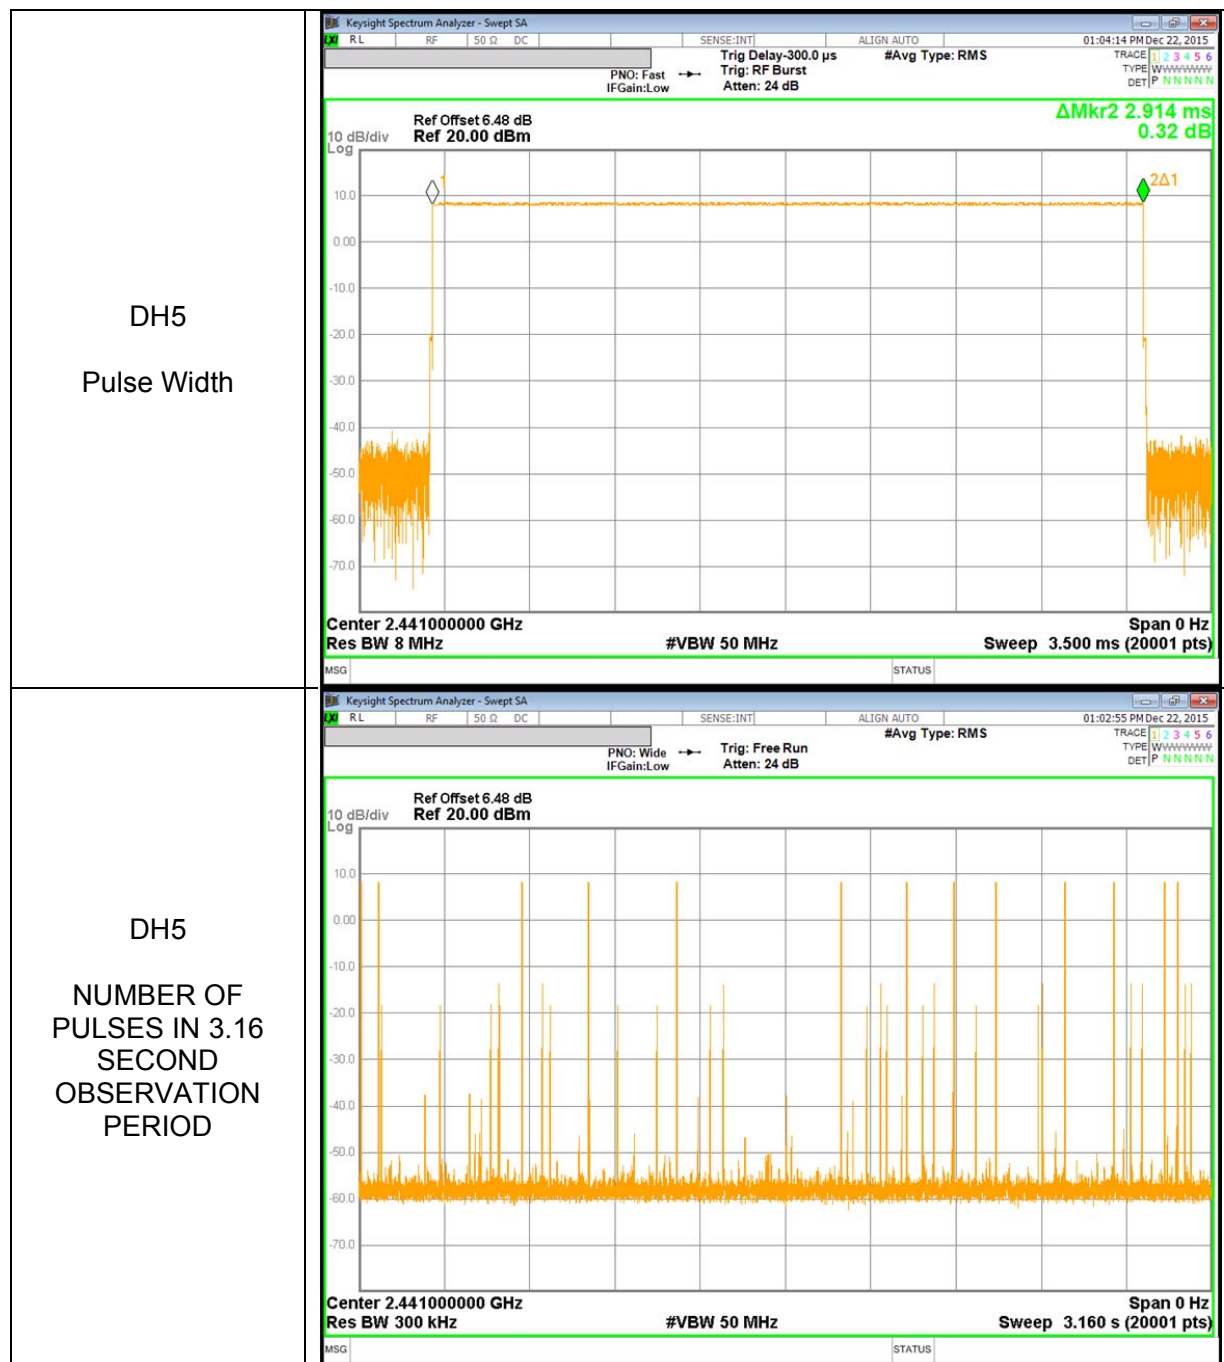

## 8.5. OUTPUT POWER

### LIMIT

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### RESULTS

#### 8.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	8.770	21	-12.23
Middle	2441	8.922	21	-12.078
High	2480	8.988	21	-12.012
Worst		8.988	21	-12.012

#### 8.5.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	10.188	21	-10.812
Middle	2441	10.409	21	-10.591
High	2480	10.332	21	-10.668
Worst		10.409	21	-10.591

#### 8.5.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	10.311	21	-10.689
Middle	2441	10.518	21	-10.482
High	2480	10.455	21	-10.545
Worst		10.518	21	-10.482

### 8.5.4. OUTPUT POWER PLOTS

#### GFSK OUTPUT POWER

<p>GFSK Low CH</p>	<p>Keyight Spectrum Analyzer - Swept SA          04:56:35 PM Dec 17, 2015          PNO: Fast IFGain:Low Trig: Free Run Atten: 24 dB #Avg Type: RMS AvgHold: 100/100          Ref Offset 6.34 dB Ref 20.00 dBm          Mkr1 2.401 849 000 GHz 8.770 dBm          10 dB/div Log          Center 2.402000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 5.000 MHz Sweep 2.667 ms (40001 pts)</p>
<p>GFSK Middle CH</p>	<p>Keyight Spectrum Analyzer - Swept SA          04:54:39 PM Dec 17, 2015          PNO: Fast IFGain:Low Trig: Free Run Atten: 24 dB #Avg Type: RMS AvgHold: 100/100          Ref Offset 6.34 dB Ref 20.00 dBm          Mkr1 2.440 867 250 GHz 8.922 dBm          10 dB/div Log          Center 2.441000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 5.000 MHz Sweep 2.667 ms (40001 pts)</p>
<p>GFSK High CH</p>	<p>Keyight Spectrum Analyzer - Swept SA          04:54:01 PM Dec 17, 2015          PNO: Fast IFGain:Low Trig: Free Run Atten: 24 dB #Avg Type: RMS AvgHold: 100/100          Ref Offset 6.34 dB Ref 20.00 dBm          Mkr1 2.479 757 000 GHz 8.988 dBm          10 dB/div Log          Center 2.480000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 5.000 MHz Sweep 2.667 ms (40001 pts)</p>

**Pi/4-DPSK OUTPUT POWER**

<p>Pi/4-DPSK Low CH</p>	<p>Keysight Spectrum Analyzer - Swept SA        RL RF 50 Ω DC SENSE:INT ALIGN: AUTO 04:56:15 PM Dec 17, 2015        PNO: Fast IF Gain: Low Trig: Free Run #Avg Type: RMS Avg Hold: 100/100        Ref Offset: 6.34 dB Ref: 20.00 dBm Mkr1 2.402 051 375 GHz 10.188 dBm        10 dB/div Log        Center 2.402000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 5.000 MHz Sweep 2.667 ms (40001 pts)</p>
<p>Pi/4-DPSK Middle CH</p>	<p>Keysight Spectrum Analyzer - Swept SA        RL RF 50 Ω DC SENSE:INT ALIGN: AUTO 04:54:59 PM Dec 17, 2015        PNO: Fast IF Gain: Low Trig: Free Run #Avg Type: RMS Avg Hold: 100/100        Ref Offset: 6.34 dB Ref: 20.00 dBm Mkr1 2.441 085 375 GHz 10.409 dBm        10 dB/div Log        Center 2.441000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 5.000 MHz Sweep 2.667 ms (40001 pts)</p>
<p>Pi/4-DPSK High CH</p>	<p>Keysight Spectrum Analyzer - Swept SA        RL RF 50 Ω DC SENSE:INT ALIGN: AUTO 04:53:44 PM Dec 17, 2015        PNO: Fast IF Gain: Low Trig: Free Run #Avg Type: RMS Avg Hold: 100/100        Ref Offset: 6.34 dB Ref: 20.00 dBm Mkr1 2.479 851 125 GHz 10.332 dBm        10 dB/div Log        Center 2.479000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 5.000 MHz Sweep 2.667 ms (40001 pts)</p>

**8PSK OUTPUT POWER**

<p>8PSK Low CH</p>	<p>Keysight Spectrum Analyzer - Swept SA          RL RF 50 Ω DC SENSE:INT ALIGN: AUTO 04:55:56 PM Dec 17, 2015          PNO: Fast Trig: Free Run #Avg Type: RMS          IFGain:Low Atten: 24 dB AvgHold: 100/100          TRACE: 1 2 3 4 5 6          TYPE: M W W W W W W W          DET: P N N N N N N          Ref Offset 6.34 dB          Ref 20.00 dBm          Mkr1 2.401 984 750 GHz          10.311 dBm          10 dB/div          Log          Center 2.402000 GHz Span 5.000 MHz          #Res BW 3.0 MHz #VBW 50 MHz Sweep 2.667 ms (40001 pts)          MSG STATUS</p>
<p>8PSK Middle CH</p>	<p>Keysight Spectrum Analyzer - Swept SA          RL RF 50 Ω DC SENSE:INT ALIGN: AUTO 04:55:27 PM Dec 17, 2015          PNO: Fast Trig: Free Run #Avg Type: RMS          IFGain:Low Atten: 24 dB AvgHold: 100/100          TRACE: 1 2 3 4 5 6          TYPE: M W W W W W W W          DET: P N N N N N N          Ref Offset 6.34 dB          Ref 20.00 dBm          Mkr1 2.440 985 500 GHz          10.518 dBm          10 dB/div          Log          Center 2.441000 GHz Span 5.000 MHz          #Res BW 3.0 MHz #VBW 50 MHz Sweep 2.667 ms (40001 pts)          MSG STATUS</p>
<p>8PSK High CH</p>	<p>Keysight Spectrum Analyzer - Swept SA          RL RF 50 Ω DC SENSE:INT ALIGN: AUTO 04:53:18 PM Dec 17, 2015          PNO: Fast Trig: Free Run #Avg Type: RMS          IFGain:Low Atten: 24 dB AvgHold: 100/100          TRACE: 1 2 3 4 5 6          TYPE: M W W W W W W W          DET: P N N N N N N          Ref Offset 6.34 dB          Ref 20.00 dBm          Mkr1 2.480 047 375 GHz          10.455 dBm          10 dB/div          Log          Center 2.480000 GHz Span 5.000 MHz          #Res BW 3.0 MHz #VBW 50 MHz Sweep 2.667 ms (40001 pts)          MSG STATUS</p>

## 8.6. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss of 10.1 dB (including 10 dB pad and 0.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### 8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	7.999	6.31
Middle	2441	8.141	6.52
High	2480	8.370	6.87

#### 8.6.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	7.718	5.91
Middle	2441	7.871	6.12
High	2480	7.916	6.19

#### 8.6.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	7.732	5.93
Middle	2441	7.873	6.13
High	2480	7.924	6.20

---

## **8.7. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

Limit = -20 dBc

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

### **RESULTS**


### 8.7.1. BASIC DATA RATE GFSK MODULATION

#### GFSK Mode

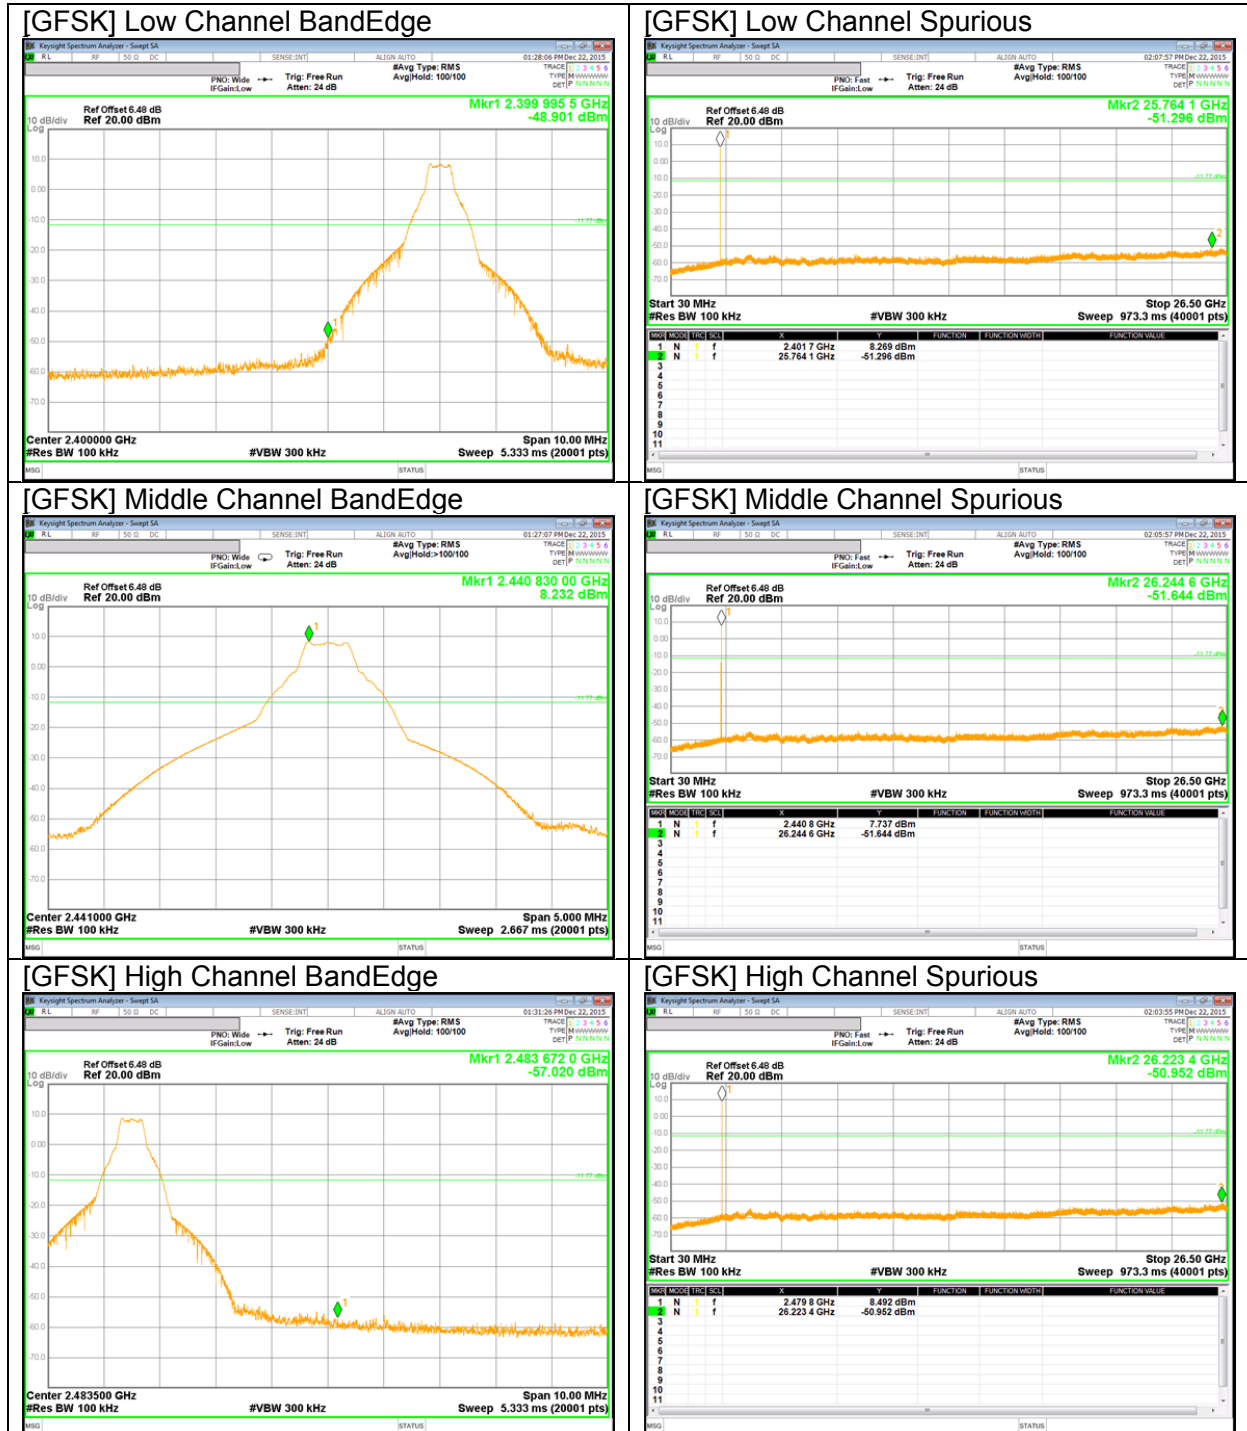


**BandEdge Emission at GFSK Hopping Mode**

[GFSK Hopping Mode] Low Channel BandEdge

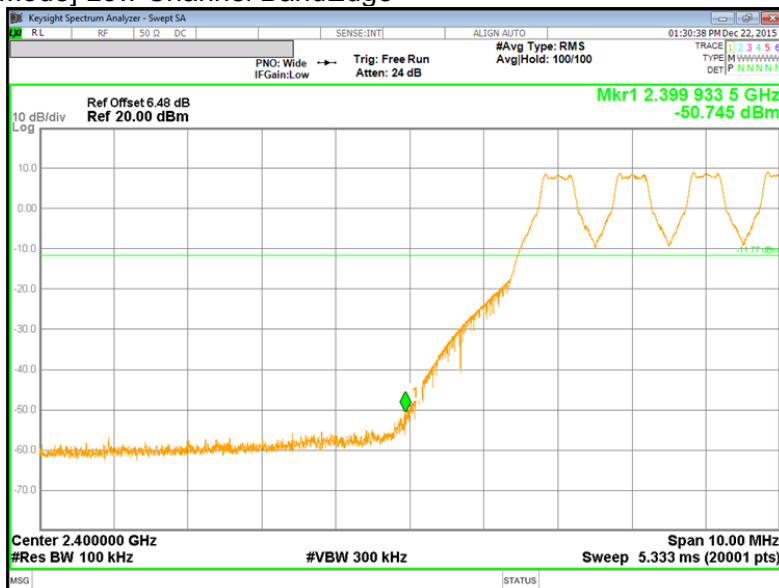

[GFSK Hopping Mode] High Channel BandEdge

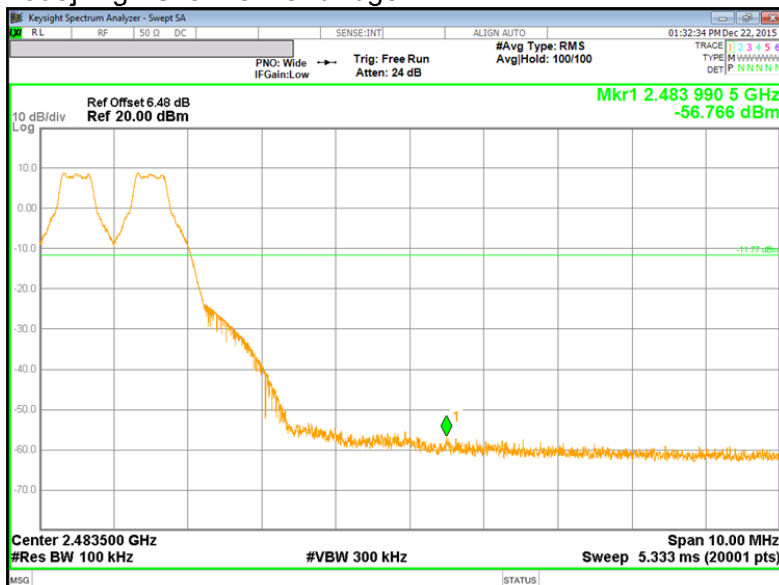

**PI/4-DQPSK Mode**

