



SAR EVALUATION REPORT

Applicant Name:

 Samsung Electronics Co., Ltd.
 129, Samsung-ro, Maetan dong,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do, 16677, Korea

Date of Testing:

09/22/16 - 10/13/16

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

0Y1609221585.A3L

FCC ID:
A3LSMJ327P
APPLICANT:
SAMSUNG ELECTRONICS CO., LTD.
DUT Type:

Portable Handset

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model(s):

SM-J327P

Equipment Class	Band & Mode	Tx Frequency	SAR		
			1 gm Head (W/kg)	1 gm Body-Worn (W/kg)	1 gm Hotspot (W/kg)
PCE	CDMA/EVDO BC10 (\$90S)	817.90 - 823.10 MHz	0.37	0.48	0.50
PCE	CDMA/EVDO BC0 (\$22H)	824.70 - 848.31 MHz	0.38	0.47	0.51
PCE	PCS CDMA/EVDO	1851.25 - 1908.75 MHz	0.32	0.41	0.52
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.25	0.33	0.31
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	0.13	0.20	0.38
PCE	UMTS 850	826.40 - 846.60 MHz	0.29	0.36	0.40
PCE	UMTS 1750	1712.4 - 1752.6 MHz	0.49	0.49	0.83
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.20	0.37	0.34
PCE	LTE Band 12	699.7 - 715.3 MHz	0.24	0.34	0.43
PCE	LTE Band 26 (Cell)	814.7 - 848.3 MHz	0.31	0.46	0.49
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	N/A		
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	0.39	0.53	0.94
PCE	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	0.25	0.35	0.41
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A		
PCE	LTE Band 41	2498.5 - 2687.5 MHz	0.26	0.41	0.56
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.61	0.14	0.30
NII	U-NII-1	5180 - 5240 MHz	N/A		
NII	U-NII-2A	5260 - 5320 MHz	0.59	0.11	N/A
NII	U-NII-2C	5500 - 5720 MHz	0.49	<0.1	N/A
NII	U-NII-3	5745 - 5825 MHz	0.59	<0.1	0.29
DSS/DTS	Bluetooth	2402 - 2480 MHz	N/A		
Simultaneous SAR per KDB 690783 D01v01r03:			1.10	0.72	1.24

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.



 Randy Ortanez
 President


The SAR Tick is an initiative of the Mobile Manufacturers Forum (MMF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MMF. Further details can be obtained by emailing: sartick@mmpfa.info.

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset			Page 1 of 77

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	11
3	INTRODUCTION	12
4	DOSIMETRIC ASSESSMENT	13
5	DEFINITION OF REFERENCE POINTS	14
6	TEST CONFIGURATION POSITIONS	15
7	RF EXPOSURE LIMITS	18
8	FCC MEASUREMENT PROCEDURES	19
9	RF CONDUCTED POWERS	26
10	SYSTEM VERIFICATION	50
11	SAR DATA SUMMARY	53
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS	67
13	SAR MEASUREMENT VARIABILITY	72
14	EQUIPMENT LIST	73
15	MEASUREMENT UNCERTAINTIES	74
16	CONCLUSION	75
17	REFERENCES	76

APPENDIX A: SAR TEST PLOTS

APPENDIX B: SAR DIPOLE VERIFICATION PLOTS

APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES

APPENDIX D: SAR TISSUE SPECIFICATIONS

APPENDIX E: SAR SYSTEM VALIDATION

APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS

FCC ID: A3LSMJ327P	PCTEST Engineering Laboratory, Inc.		SAR EVALUATION REPORT	SAMSUNG	Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 2 of 77	

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
CDMA/EVDO BC10 (§90S)	Voice/Data	817.90 - 823.10 MHz
CDMA/EVDO BC0 (§22H)	Voice/Data	824.70 - 848.31 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 12	Data	699.7 - 715.3 MHz
LTE Band 26 (Cell)	Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Data	824.7 - 848.3 MHz
LTE Band 4 (AWS)	Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Data	1850.7 - 1909.3 MHz
LTE Band 41	Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

This device utilizes a single step power reduction mechanism for SAR compliance for some wireless modes and bands. Output powers are reduced for portable hotspot operations and for all held-to-ear voice or VoIP held to ear scenarios. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when hotspot is enabled. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013.

Additionally, this device uses an independent fixed level power reduction mechanism for SAR compliance for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013.

Detailed descriptions of the power reduction mechanism are included in the operational description.

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 3 of 77

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 Maximum Power

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
			1 TX Slot	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slot	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.0	33.0	29.5	28.0	26.5	26.5	26.0	23.5	22.5
	Nominal	32.5	32.5	29.0	27.5	26.0	26.0	25.5	23.0	22.0
GSM/GPRS/EDGE 1900	Maximum	30.0	30.0	27.5	25.5	24.5	25.5	24.5	23.0	22.0
	Nominal	29.5	29.5	27.0	25.0	24.0	25.0	24.0	22.5	21.5

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Maximum	23.5	23.5	23.5
	Nominal	23.0	23.0	23.0
UMTS Band 4 (1750 MHz)	Maximum	23.5	23.5	23.5
	Nominal	23.0	23.0	23.0
UMTS Band 2 (1900 MHz)	Maximum	23.5	23.5	23.5
	Nominal	23.0	23.0	23.0

Mode / Band		Modulated Average (dBm)
CDMA/EVDO BC10 (§90S)	Maximum	24.5
	Nominal	24.0
CDMA/EVDO BC0 (§22H)	Maximum	24.5
	Nominal	24.0
PCS CDMA/EVDO	Maximum	25.0
	Nominal	24.5

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 4 of 77

Mode / Band		Modulated Average (dBm)	
LTE Band 12	Maximum	24.0	
	Nominal	23.5	
LTE Band 26 (Cell)	Maximum	24.5	
	Nominal	24.0	
LTE Band 5 (Cell)	Maximum	24.5	
	Nominal	24.0	
LTE Band 4 (AWS)	Maximum	24.5	
	Nominal	24.0	
LTE Band 25 (PCS)	Maximum	24.5	
	Nominal	24.0	
LTE Band 2 (PCS)	Maximum	24.5	
	Nominal	24.0	
LTE Band 41	Maximum	24.5	
	Nominal	24.0	

Mode / Band		Modulated Average (dBm)	
IEEE 802.11b (2.4 GHz)	Maximum	17.5	
	Nominal	17.0	
IEEE 802.11g (2.4 GHz)	Maximum	15.5	12.5 (Ch. 11)
	Nominal	15.0	12.0 (Ch. 11)
IEEE 802.11n (2.4 GHz)	Maximum	13.5	10.5 (Ch. 11)
	Nominal	13.0	10.0 (Ch. 11)
Bluetooth	Maximum	11.5	
	Nominal	11.0	
Bluetooth LE	Maximum	2.5	
	Nominal	2.0	

Mode / Band		Modulated Average (dBm)		
		20 MHz Bandwidth		40 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	13.5		
	Nominal	13.0		
IEEE 802.11n (5 GHz)	Maximum	12.5	12.5	10.5 (Ch. 38)
	Nominal	12.0	12.0	10.0 (Ch. 38)

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 5 of 77

1.3.2 Reduced Power

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
			1 TX Slot	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slot	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 1900	Maximum	28.0	28.0	27.5	25.5	24.5	25.5	24.5	23.0	22.0
	Nominal	27.5	27.5	27.0	25.0	24.0	25.0	24.0	22.5	21.5

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 2 (1900 MHz)	Maximum	21.5	21.5	21.5
	Nominal	21.0	21.0	21.0

Mode / Band		Modulated Average (dBm)
CDMA/EVDO BC10 (§90S)	Maximum	24.0
	Nominal	23.5
CDMA/EVDO BC0 (§22H)	Maximum	24.0
	Nominal	23.5
PCS CDMA/EVDO	Maximum	23.0
	Nominal	22.5

Mode / Band		Modulated Average (dBm)
LTE Band 25 (PCS)	Maximum	22.5
	Nominal	22.0
LTE Band 2 (PCS)	Maximum	22.5
	Nominal	22.0
LTE Band 41	Maximum	22.5
	Nominal	22.0

FCC ID: A3LSMJ327P	 PCTEST Engineering Laboratory, Inc.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 6 of 77

Mode / Band		Modulated Average (dBm)	
IEEE 802.11b (2.4 GHz)		Maximum	15.5
		Nominal	15.0
IEEE 802.11g (2.4 GHz)		Maximum	14.5
		Nominal	14.0
IEEE 802.11n (2.4 GHz)		Maximum	12.5
		Nominal	12.0

Mode / Band		Modulated Average (dBm)	
		20 MHz Bandwidth	40 MHz Bandwidth
IEEE 802.11a (5 GHz)	Maximum	10.5	
	Nominal	10.0	
IEEE 802.11n (5 GHz)	Maximum	10.5	10.5
	Nominal	10.0	10.0

1.4 DUT Antenna Locations

The overall dimensions of this device are $> 9 \times 5$ cm. The overall diagonal dimension of the device is ≤ 160 mm and the diagonal display is ≤ 150 mm. A diagram showing the location of the device antennas can be found in Appendix F.

Table 1-1
Device Edges/Sides for SAR Testing

Mode	Back	Front	Top	Bottom	Right	Left
EVDO BC10 (\$90S)	Yes	Yes	No	Yes	Yes	Yes
EVDO BC0 (\$22H)	Yes	Yes	No	Yes	Yes	Yes
PCS EVDO	Yes	Yes	No	Yes	Yes	Yes
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	Yes	Yes
UMTS 1900	Yes	Yes	No	Yes	Yes	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 26 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 4 (AWS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 25 (PCS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 41	Yes	Yes	No	Yes	Yes	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III. The distances between the transmit antennas and the edges of the device are included in the filing.

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 7 of 77

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 1-1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Figure 1-1
Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

Table 1-2
Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Notes
1	1x CDMA voice + 2.4 GHz WI-FI	Yes	Yes	N/A	
2	1x CDMA voice + 5 GHz WI-FI	Yes	Yes	N/A	
3	1x CDMA voice + 2.4 GHz Bluetooth	N/A	Yes	N/A	
4	GSM voice + 2.4 GHz WI-FI	Yes	Yes	N/A	
5	GSM voice + 5 GHz WI-FI	Yes	Yes	N/A	
6	GSM voice + 2.4 GHz Bluetooth	N/A	Yes	N/A	
7	UMTS + 2.4 GHz WI-FI	Yes	Yes	Yes	
8	UMTS + 5 GHz WI-FI	Yes	Yes	Yes	
9	UMTS + 2.4 GHz Bluetooth	N/A	Yes	N/A	
10	LTE + 2.4 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
11	LTE + 5 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
12	LTE + 2.4 GHz Bluetooth	N/A	Yes*	N/A	*-Pre-installed VOIP applications are considered.
13	CDMA/EVDO data + 2.4 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
14	CDMA/EVDO data + 5 GHz WI-FI	Yes*	Yes*	Yes	*-Pre-installed VOIP applications are considered.
15	CDMA/EVDO data + 2.4 GHz Bluetooth	N/A	Yes*	N/A	*-Pre-installed VOIP applications are considered.
16	GPRS/EDGE + 2.4 GHz WI-FI	N/A	N/A	Yes	
17	GPRS/EDGE + 5 GHz WI-FI	N/A	N/A	Yes	
18	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	N/A	N/A	

1. 2.4 GHz WLAN, 5 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
2. All licensed modes share the same antenna path and cannot transmit simultaneously.
3. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
4. Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
5. This device supports VoWIFI.

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 8 of 77	

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WIFI, only 2.4 GHz and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn Bluetooth SAR was not required; $[(14/15) * \sqrt{2.480}] = 1.5 < 3.0$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1x Advanced was not more than 0.25 dB higher than the maximum powers for 1x and the measured SAR in any 1x mode exposure conditions was not greater than 1.2 W/kg per FCC KDB Publication 941225 D01v03r01.

This device supports both LTE B26 (Cell) and LTE B5 (Cell). Since the supported frequency span for LTE B5 (Cell) falls completely within the supported frequency span for LTE B26 (Cell), both LTE bands have the same target power, and both LTE bands share the same transmission path, SAR was only assessed for LTE B26 (Cell).

This device supports both LTE B25 (PCS) and LTE B2 (PCS). Since the supported frequency span for LTE B2 (PCS) falls completely within the supported frequency span for LTE B25 (PCS), both LTE bands have the same target power, and both LTE bands share the same transmission path, SAR was only assessed for LTE B25 (PCS).

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset			Page 9 of 77

1.7 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

	Head Serial Number	Body-Worn Serial Number	Hotspot Serial Number
CDMA/EVDO BC10 (\$90S)	04122	04106	04155
CDMA/EVDO BC0 (\$22H)	04122	04106	04155
PCS CDMA/EVDO	04155	04106	04155
GSM/GPRS/EDGE 850	04148	04148	04148
GSM/GPRS/EDGE 1900	04122	04148	04122
UMTS 850	04148	04148	04148
UMTS 1750	01664	01664	01664
UMTS 1900	04122	04148	04122
LTE Band 12	04106	04106	04106
LTE Band 26 (Cell)	04106	04106	04106
LTE Band 4 (AWS)	04114	04114	04114
LTE Band 25 (PCS)	04155	04106	04155
LTE Band 41	04155	04106	04155
2.4 GHz WLAN	03892	03892	03892
5 GHz WLAN	03892	03892	03892

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 10 of 77

2 LTE INFORMATION

LTE Information					
FCC ID	A3LSMJ327P				
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz) LTE Band 26 (Cell) (814.7 - 848.3 MHz) LTE Band 5 (Cell) (824.7 - 848.3 MHz) LTE Band 4 (AWS) (1710.7 - 1754.3 MHz) LTE Band 25 (PCS) (1850.7 - 1914.3 MHz) LTE Band 2 (PCS) (1850.7 - 1909.3 MHz) LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	707.5 (23095)	715.3 (23173)		
LTE Band 12: 3 MHz	700.5 (23025)	707.5 (23095)	714.5 (23165)		
LTE Band 12: 5 MHz	701.5 (23035)	707.5 (23095)	713.5 (23155)		
LTE Band 12: 10 MHz	704 (23060)	707.5 (23095)	711 (23130)		
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)	831.5 (26865)	848.3 (27033)		
LTE Band 26 (Cell): 3 MHz	815.5 (26705)	831.5 (26865)	847.5 (27025)		
LTE Band 26 (Cell): 5 MHz	816.5 (26715)	831.5 (26865)	846.5 (27015)		
LTE Band 26 (Cell): 10 MHz	819 (26740)	831.5 (26865)	844 (26990)		
LTE Band 26 (Cell): 15 MHz	821.5 (26765)	831.5 (26865)	841.5 (26965)		
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)		
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)		
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)		
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)		
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)		
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)		
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)		
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)		
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)		
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)		
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)	1882.5 (26365)	1914.3 (26683)		
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)	1882.5 (26365)	1913.5 (26675)		
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)	1882.5 (26365)	1912.5 (26665)		
LTE Band 25 (PCS): 10 MHz	1855 (26090)	1882.5 (26365)	1910 (26640)		
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)	1882.5 (26365)	1907.5 (26615)		
LTE Band 25 (PCS): 20 MHz	1860 (26140)	1882.5 (26365)	1905 (26590)		
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)		
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)		
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)		
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)		
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)		
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)		
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	4				
Modulations Supported in UL	QPSK, 16QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Release 10 Additional Information	This device does not support full CA features on 3GPP Release 10. All uplink communications are identical to the Release 8 Specifications. The following LTE Release 10 Features are not supported: Carrier Aggregation, Relay, HetNet, Enhanced MIMO, eICIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 11 of 77

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1
SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

σ = conductivity of the tissue-simulating material (S/m)

ρ = mass density of the tissue-simulating material (kg/m³)

E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]


FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 12 of 77

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points ($10 \times 10 \times 10$) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.

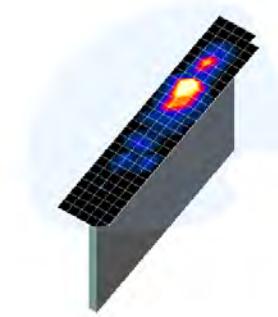

**Figure 4-1
Sample SAR Area Scan**

**Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04***

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{area}, \Delta y_{area}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{zoom}, \Delta y_{zoom}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid		Graded Grid	
			$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)^*$	$\Delta z_{zoom}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 13 of 77	

5 DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].

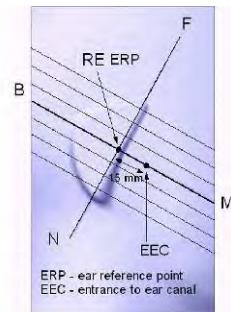


Figure 5-1
Close-Up Side view
of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the "vertical centerline" was bisecting the front surface of the handset at its top and bottom edges, positioning the "ear reference point" on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

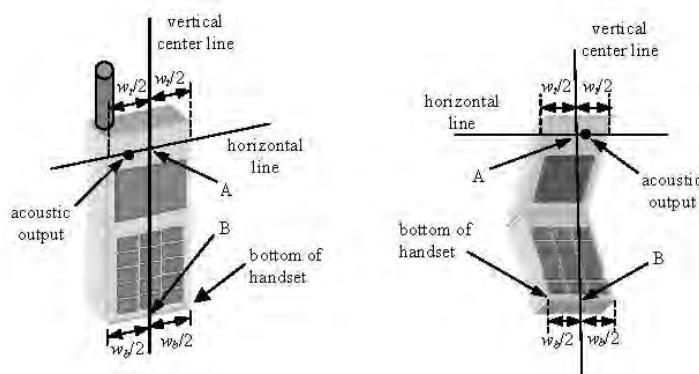


Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 14 of 77

6 TEST CONFIGURATION POSITIONS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 15 of 77

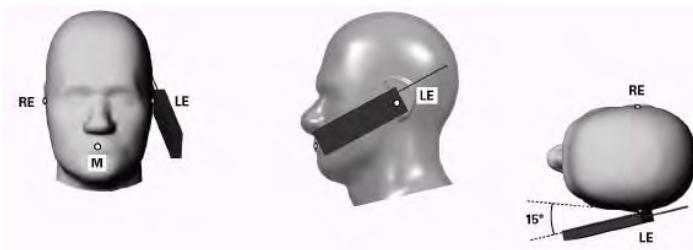


Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3
Side view w/ relevant markings

6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

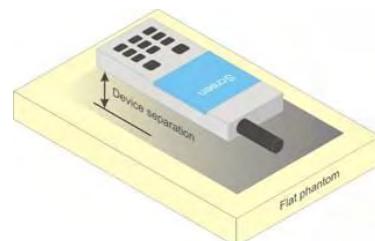


Figure 6-4
Sample Body-Worn Diagram

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 16 of 77

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: A3LSMJ327P	 SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset	Page 17 of 77

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 18 of 77

8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported SAR*. The highest *reported SAR* results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

8.4.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.” Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the “All Up” condition.

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 19 of 77

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH₀ and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH₀ data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

Table 8-1
Parameters for Max. Power for RC1

Parameter	Units	Value
\bar{I}_{or}	dBm/1.23 MHz	-104
$\frac{\text{Pilot } E_c}{\bar{I}_{\text{or}}}$	dB	-7
$\frac{\text{Traffic } E_c}{\bar{I}_{\text{or}}}$	dB	-7.4

Table 8-2
Parameters for Max. Power for RC3

Parameter	Units	Value
\bar{I}_{or}	dBm/1.23 MHz	-86
$\frac{\text{Pilot } E_c}{\bar{I}_{\text{or}}}$	dB	-7
$\frac{\text{Traffic } E_c}{\bar{I}_{\text{or}}}$	dB	-7.4

5. FCHs were configured at full rate for maximum SAR with "All Up" power control bits.

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at fullrate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

Head SAR is additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section 8.4.5 for EVDO Rev. A configuration parameters.

8.4.3 Body-worn SAR Measurements

SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH_n), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH_n), with FCH at full rate and SCH₀ enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

The 3G SAR test reduction procedure is applied to body-worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

8.4.4 Body-worn SAR Measurements for EVDO Devices

For handsets with Ev-Do capabilities, the 3G SAR test reduction procedure is applied to Ev-Do Rev. 0 with 1x RTT RC3 as the primary mode to determine body-worn accessory test requirements. Otherwise, body-worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied to Rev. A, with Rev. 0 as the primary mode to determine body-worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode.

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 20 of 77

When SAR is required for EVDO Rev. A, SAR is measured with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations, using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0 or 1x RTT RC3, as appropriate.

8.4.5 Body SAR Measurements for EVDO Hotspot

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode; otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

For Ev-Do data devices that also support 1x RTT voice and/or data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with Ev-Do Rev. 0 and Rev. A as the respective primary modes. Otherwise, the 'Body-Worn Accessory SAR' procedures in the '3GPP2 CDMA 2000 1x Handsets' section are applied.

8.4.6 CDMA2000 1x Advanced

This device additionally supports 1x Advanced. Conducted powers are measured using SO75 with RC8 on the uplink and RC11 on the downlink per FCC KDB Publication 941225 D01v03r01. Smart blanking is disabled for all measurements. The EUT is configured with forward power control Mode 000 and reverse power control at 400 bps. Conducted powers are measured on an Agilent 8960 Series 10 Wireless Communications Test Set, Model E5515C using the CDMA2000 1x Advanced application, Option E1962B-410.

The 3G SAR test reduction procedure is applied to the 1x-Advanced transmission mode with 1x RTT RC3 as the primary mode. When SAR measurement is required, the 1x-Advanced power measurement configurations are used. The 1x Advanced SAR procedures are applied separately to head, body-worn accessory and other exposure conditions.

8.5 SAR Measurement Conditions for UMTS

8.5.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.5.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset			Page 21 of 77

8.5.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

8.5.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

8.5.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.6 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.6.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.6.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.6.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 22 of 77

8.6.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.6.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

8.7 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

8.7.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 23 of 77

8.7.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is $> 1.2 \text{ W/kg}$. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is $> 1.2 \text{ W/kg}$.

8.7.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

8.7.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is $\leq 0.4 \text{ W/kg}$, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is $\leq 0.8 \text{ W/kg}$ or all test positions are measured.

8.7.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8 \text{ W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is $> 0.8 \text{ W/kg}$, SAR is required for that position using the next highest measured output power channel. When any reported SAR is $> 1.2 \text{ W/kg}$, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is $> 1.2 \text{ W/kg}$. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 24 of 77

8.7.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.7.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.7.6).

8.7.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required.

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset			Page 25 of 77

9 RF CONDUCTED POWERS

9.1 CDMA Conducted Powers

9.1.1 Maximum Power

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SCH	FCH	(RTAP)	(RETAP)
Cellular	564	90S	820.1	23.99	23.88	23.90	23.99	24.01	23.87	23.89
Cellular	1013	22H	824.7	23.98	24.05	24.01	24.11	24.07	24.01	24.02
	384	22H	836.52	23.91	23.92	23.89	24.03	24.00	23.92	23.88
	777	22H	848.31	23.95	24.01	23.99	23.99	24.03	23.96	23.92
PCS	25	24E	1851.25	24.14	24.08	24.11	24.33	24.19	24.15	24.20
	600	24E	1880	24.19	24.18	24.16	24.22	24.24	24.17	24.11
	1175	24E	1908.75	24.21	24.21	24.26	24.23	24.22	24.16	24.27

9.1.2 Reduced Power

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SCH	FCH	(RTAP)	(RETAP)
Cellular	564	90S	820.1	23.69	23.71	23.68	23.71	23.72	23.66	23.65
Cellular	1013	22H	824.7	23.57	23.67	23.62	23.62	23.65	23.66	23.57
	384	22H	836.52	23.61	23.58	23.55	23.60	23.65	23.50	23.58
	777	22H	848.31	23.53	23.52	23.49	23.54	23.57	23.52	23.50
PCS	25	24E	1851.25	22.51	22.53	22.46	22.60	22.69	22.54	22.56
	600	24E	1880	22.35	22.32	22.30	22.26	22.42	22.32	22.35
	1175	24E	1908.75	22.22	22.30	22.24	22.25	22.31	22.25	22.34

Note: RC1 is only applicable for IS-95 compatibility. For FCC Rule Part 90S, Per FCC KDB Publication 447498 D01v06 4.1.g), only one channel is required since the device operates within the transmission range of 817.90 – 823.10 MHz.

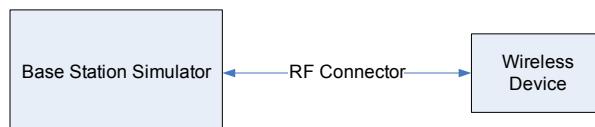


Figure 9-1
Power Measurement Setup

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT					Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset				Page 26 of 77	

9.2 GSM Conducted Powers

9.2.1 Maximum Power

Maximum Burst-Averaged Output Power												
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)				EDGE [dBm] 4 Tx Slot	
			GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot		
GSM 850	128	31.84	31.84	29.20	27.70	26.11	26.04	24.49	22.66	21.48		
	190	31.93	31.94	29.11	27.81	26.08	25.91	24.44	22.64	21.54		
	251	31.89	31.89	29.23	27.92	26.18	26.10	24.57	22.71	21.59		
GSM 1900	512	28.91	28.94	27.12	25.38	24.18	25.03	24.31	22.69	21.50		
	661	28.87	28.91	27.12	25.43	24.31	25.24	24.42	22.83	21.65		
	810	28.93	28.90	27.10	25.45	24.26	25.28	24.48	22.94	21.61		
Calculated Maximum Frame-Averaged Output Power												
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)				EDGE [dBm] 4 Tx Slot	
			GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot		
GSM 850	128	22.81	22.81	23.18	23.44	23.10	17.01	18.47	18.40	18.47		
	190	22.90	22.91	23.09	23.55	23.07	16.88	18.42	18.38	18.53		
	251	22.86	22.86	23.21	23.66	23.17	17.07	18.55	18.45	18.58		
GSM 1900	512	19.88	19.91	21.10	21.12	21.17	16.00	18.29	18.43	18.49		
	661	19.84	19.88	21.10	21.17	21.30	16.21	18.40	18.57	18.64		
	810	19.90	19.87	21.08	21.19	21.25	16.25	18.46	18.68	18.60		
GSM 850	Frame	23.47	23.47	22.98	23.24	22.99	16.97	19.48	18.74	18.99		
GSM 1900	Avg.Targets:	20.47	20.47	20.98	20.74	20.99	15.97	17.98	18.24	18.49		

9.2.2 Reduced Power

Maximum Burst-Averaged Output Power												
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)				EDGE [dBm] 4 Tx Slot	
			GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot		
GSM 1900	512	27.36	27.38	27.10	25.08	24.08	24.86	23.91	22.42	21.25		
	661	27.17	27.12	26.65	24.86	23.76	24.61	23.76	22.11	20.93		
	810	27.43	27.45	27.15	25.47	24.17	24.95	24.26	22.39	21.38		
Calculated Maximum Frame-Averaged Output Power												
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)				EDGE [dBm] 4 Tx Slot	
			GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot		
GSM 1900	512	18.33	18.35	21.08	20.82	21.07	15.83	17.89	18.16	18.24		
	661	18.14	18.09	20.63	20.60	20.75	15.58	17.74	17.85	17.92		
	810	18.40	18.42	21.13	21.21	21.16	15.92	18.24	18.13	18.37		
GSM 1900	Frame Avg.Targets:	18.47	18.47	20.98	20.74	20.99	15.97	17.98	18.24	18.49		

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT							Reviewed by:
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset							Quality Manager

Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: B

GPRS Multislot class: 33 (Max 4 Tx uplink slots)

EDGE Multislot class: 33 (Max 4 Tx uplink slots)

DTM Multislot Class: N/A

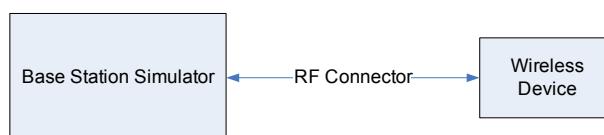


Figure 9-2
Power Measurement Setup

FCC ID: A3LSMJ327P	 SAR EVALUATION REPORT	 Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset

9.3 UMTS Conducted Powers

9.3.1 Maximum Power

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.50	23.09	23.15	23.12	23.16	23.07	23.18	23.06	23.10	-
99		12.2 kbps AMR	23.49	23.07	23.24	23.15	23.13	23.11	23.19	23.02	23.12	-
6	HSDPA	Subtest 1	22.64	22.13	22.36	22.08	22.19	22.08	22.15	21.93	22.05	0
6		Subtest 2	22.61	22.08	22.29	22.05	22.21	22.01	22.10	21.97	21.98	0
6		Subtest 3	22.10	21.56	21.69	21.51	21.65	21.53	21.65	21.48	21.51	0.5
6		Subtest 4	22.11	21.56	21.76	21.48	21.68	21.55	21.62	21.47	21.48	0.5
6	HSUPA	Subtest 1	22.66	22.01	22.28	21.89	21.70	22.15	21.90	21.96	22.08	0
6		Subtest 2	21.47	21.09	21.05	20.68	20.62	20.91	20.63	20.68	21.03	2
6		Subtest 3	21.50	20.71	21.23	20.84	20.87	21.04	20.80	20.89	20.98	1
6		Subtest 4	21.46	20.79	21.33	21.16	21.08	21.13	21.33	20.97	21.06	2
6		Subtest 5	22.63	22.08	22.34	21.99	22.08	22.01	22.14	21.92	22.04	0

9.3.2 Reduced Power

3GPP Release Version	Mode	3GPP 34.121 Subtest	PCS Band [dBm]			3GPP MPR [dB]
			9262	9400	9538	
99	WCDMA	12.2 kbps RMC	21.00	21.11	20.95	-
99		12.2 kbps AMR	20.87	20.98	21.02	-
6	HSDPA	Subtest 1	19.89	20.00	19.67	0
6		Subtest 2	19.82	19.93	19.65	0
6		Subtest 3	19.31	19.36	19.25	0.5
6		Subtest 4	19.34	19.37	19.25	0.5
6	HSUPA	Subtest 1	19.75	19.91	19.40	0
6		Subtest 2	18.50	18.38	18.50	2
6		Subtest 3	18.55	18.48	18.47	1
6		Subtest 4	19.10	18.78	18.53	2
6		Subtest 5	19.95	19.93	19.69	0

This device does not support DC-HSDPA.

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.

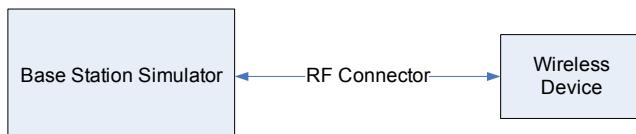


Figure 9-3
Power Measurement Setup

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT				Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset			Page 29 of 77	

9.4 LTE Conducted Powers

9.4.1

LTE Band 12

Table 9-1
Maximum LTE Band 12 Conducted Powers - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.29	0	0
	1	25	23.49		0
	1	49	23.24		0
	25	0	22.23		1
	25	12	22.28		1
	25	25	22.34		1
	50	0	22.33		1
	1	0	22.23		1
16QAM	1	25	22.48	0-1	1
	1	49	22.49		1
	25	0	21.39		2
	25	12	21.47		2
	25	25	21.32		2
	50	0	21.46		2

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-2
Maximum LTE Band 12 Conducted Powers - 5 MHz Bandwidth

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.50	23.23	23.25	0	0
	1	12	23.70	23.48	23.10		0
	1	24	23.50	23.11	23.50		0
	12	0	22.30	22.42	22.27		1
	12	6	22.28	22.44	22.20		1
	12	13	22.21	22.38	22.21		1
	25	0	22.19	22.40	22.20		1
	1	0	22.14	22.06	22.00		1
16QAM	1	12	21.97	22.26	22.25	0-1	1
	1	24	21.97	22.04	22.22		1
	12	0	21.18	21.32	21.12		2
	12	6	21.19	21.62	21.00		2
	12	13	21.23	21.62	20.86	0-2	2
	25	0	21.12	21.53	21.07		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 30 of 77

Table 9-3
Maximum LTE Band 12 Conducted Powers - 3 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 12 3 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	23.50	23.31	23.17	0	0
	1	7	23.33	23.65	23.50		0
	1	14	23.18	23.46	23.53		0
	8	0	22.26	22.36	22.33	0-1	1
	8	4	22.16	22.36	22.18		1
	8	7	22.21	22.34	22.27		1
	15	0	22.28	22.36	22.24		1
16QAM	1	0	22.80	22.31	22.44	0-1	1
	1	7	22.75	22.27	22.75		1
	1	14	22.50	22.10	22.66		1
	8	0	21.00	21.12	21.45	0-2	2
	8	4	20.98	21.12	21.31		2
	8	7	20.93	21.15	21.31		2
	15	0	21.09	21.26	21.33		2

Table 9-4
Maximum LTE Band 12 Conducted Powers - 1.4 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 12 1.4 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
Conducted Power [dBm]							
QPSK	1	0	23.47	23.69	23.43	0	0
	1	2	23.58	23.68	23.48		0
	1	5	23.46	23.75	23.53		0
	3	0	23.50	23.47	23.53		0
	3	2	23.45	23.55	23.69	0-1	0
	3	3	23.48	23.59	23.38		0
	6	0	22.32	22.41	22.40		1
16QAM	1	0	22.68	22.00	22.28	0-1	1
	1	2	22.74	21.88	22.24		1
	1	5	22.74	21.97	22.37		1
	3	0	22.31	22.50	22.54		1
	3	2	22.44	22.43	22.60	0-2	1
	3	3	22.37	22.47	22.40		1
	6	0	21.04	21.63	21.12		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 31 of 77

9.4.2

LTE Band 26 (Cell)

Table 9-5
Maximum LTE Band 26 (Cell) Conducted Powers - 15 MHz Bandwidth

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.12	0	0
	1	36	24.17		0
	1	74	24.45		0
	36	0	23.05	0-1	1
	36	18	23.10		1
	36	37	23.11		1
	75	0	23.00		1
16QAM	1	0	23.41	0-1	1
	1	36	23.46		1
	1	74	23.49		1
	36	0	21.93	0-2	2
	36	18	22.13		2
	36	37	22.29		2
	75	0	22.03		2

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-6
Maximum LTE Band 26 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
QPSK	1	0	24.06	24.26	24.33	0	0
	1	25	24.50	24.42	24.34		0
	1	49	23.98	24.06	24.21		0
	25	0	23.00	23.10	23.12	0-1	1
	25	12	23.06	23.10	23.10		1
	25	25	22.92	23.16	22.82		1
	50	0	22.96	23.08	22.99		1
16QAM	1	0	23.36	23.47	23.06	0-1	1
	1	25	23.45	23.14	23.48		1
	1	49	23.25	23.48	23.03		1
	25	0	22.00	22.02	22.24	0-2	2
	25	12	22.07	22.23	22.27		2
	25	25	22.07	22.18	22.00		2
	50	0	22.12	22.17	22.06		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 32 of 77

Table 9-7
Maximum LTE Band 26 (Cell) Conducted Powers - 5 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 26 (Cell) 5 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26715 (816.5 MHz)	Mid Channel 26865 (831.5 MHz)	High Channel 27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.93	23.68	23.77	0	0
	1	12	24.46	23.99	23.78		0
	1	24	24.16	23.95	24.00		0
	12	0	23.02	23.05	23.04	0-1	1
	12	6	22.94	23.10	22.98		1
	12	13	22.99	23.22	22.97		1
	25	0	23.02	23.13	22.80		1
16QAM	1	0	22.58	22.61	22.97	0-1	1
	1	12	22.91	22.42	22.67		1
	1	24	22.60	23.16	23.14		1
	12	0	21.97	22.04	21.92	0-2	2
	12	6	21.85	22.00	21.68		2
	12	13	21.90	22.11	21.78		2
	25	0	21.88	22.16	22.08		2

Table 9-8
Maximum LTE Band 26 (Cell) Conducted Powers - 3 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 26 (Cell) 3 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26705 (815.5 MHz)	Mid Channel 26865 (831.5 MHz)	High Channel 27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.91	23.91	23.83	0	0
	1	7	24.15	24.12	24.22		0
	1	14	23.64	24.30	23.96		0
	8	0	22.91	23.11	22.95	0-1	1
	8	4	22.88	23.18	22.98		1
	8	7	22.81	23.12	22.81		1
	15	0	22.87	23.14	22.92		1
16QAM	1	0	23.23	22.92	23.20	0-1	1
	1	7	23.50	23.45	23.43		1
	1	14	23.33	23.33	23.47		1
	8	0	22.28	22.12	22.00	0-2	2
	8	4	22.27	22.18	22.02		2
	8	7	22.25	22.02	21.96		2
	15	0	21.80	22.08	21.90		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 33 of 77

Table 9-9
Maximum LTE Band 26 (Cell) Conducted Powers - 1.4 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 26 (Cell) 1.4 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26697 (814.7 MHz)	Mid Channel 26865 (831.5 MHz)	High Channel 27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.10	24.02	23.52	0	0
	1	2	24.13	24.21	23.55		0
	1	5	24.15	24.18	23.55		0
	3	0	23.91	24.11	23.95		0
	3	2	24.03	24.20	23.99		0
	3	3	23.91	24.11	24.09		0
	6	0	22.90	22.98	22.85		1
16QAM	1	0	22.54	23.15	22.90	0-1	1
	1	2	22.42	23.16	23.43		1
	1	5	22.47	22.99	23.33		1
	3	0	22.92	23.00	22.95		1
	3	2	22.97	22.97	22.93	0-2	1
	3	3	22.93	23.00	22.85		1
	6	0	21.75	22.02	22.07		2

FCC ID: A3LSMJ327P	 SAR EVALUATION REPORT	 Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset

9.4.3

LTE Band 4 (AWS)

Table 9-10
Maximum LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth

LTE Band 4 (AWS) 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20175 (1732.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.17	0	0
	1	50	24.34		0
	1	99	23.94		0
	50	0	22.99		1
	50	25	22.91	0-1	1
	50	50	22.81		1
	100	0	22.79		1
	1	0	22.82	0-1	1
16QAM	1	50	22.99		1
	1	99	22.61		1
	50	0	21.98	0-2	2
	50	25	21.85		2
	50	50	21.92		2
	100	0	21.90		2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-11
Maximum LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth

LTE Band 4 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.21	24.34	24.33	0	0
	1	36	24.31	24.29	24.34		0
	1	74	24.08	23.96	24.02		0
	36	0	23.25	23.04	23.08	0-1	1
	36	18	23.15	22.97	22.96		1
	36	37	22.92	22.86	22.79		1
	75	0	23.02	22.85	22.94		1
16QAM	1	0	22.57	22.81	22.88	0-1	1
	1	36	22.75	22.88	22.85		1
	1	74	22.78	22.40	22.47		1
	36	0	22.23	21.86	21.98	0-2	2
	36	18	22.20	22.07	21.99		2
	36	37	21.97	21.98	21.91		2
	75	0	22.06	22.05	21.99		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 35 of 77

Table 9-12
Maximum LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 4 (AWS) 10 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 20000 (1715.0 MHz)	Mid Channel 20175 (1732.5 MHz)	High Channel 20350 (1750.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.21	24.23	24.26	0	0
	1	25	24.36	24.24	24.49		0
	1	49	24.10	24.00	24.31		0
	25	0	23.21	23.00	23.06	0-1	1
	25	12	23.11	22.96	22.95		1
	25	25	22.90	22.85	22.86		1
	50	0	23.00	22.88	22.99		1
16QAM	1	0	22.71	22.80	22.70	0-1	1
	1	25	23.08	23.00	22.70		1
	1	49	22.46	22.33	22.63		1
	25	0	22.18	22.00	22.08	0-2	2
	25	12	22.14	22.10	21.98		2
	25	25	22.03	21.97	21.97		2
	50	0	22.19	22.09	22.04		2

Table 9-13
Maximum LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 4 (AWS) 5 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 19975 (1712.5 MHz)	Mid Channel 20175 (1732.5 MHz)	High Channel 20375 (1752.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.08	24.11	24.06	0	0
	1	12	24.22	24.38	24.25		0
	1	24	24.06	24.23	24.27		0
	12	0	23.14	23.09	23.05	0-1	1
	12	6	23.04	23.05	23.05		1
	12	13	22.98	23.07	22.98		1
	25	0	23.02	22.99	23.10		1
16QAM	1	0	22.85	22.79	22.61	0-1	1
	1	12	23.03	22.96	22.91		1
	1	24	22.68	22.82	22.68		1
	12	0	21.97	21.89	21.92	0-2	2
	12	6	22.05	21.93	22.04		2
	12	13	22.03	21.92	22.07		2
	25	0	22.15	21.95	22.06		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 36 of 77

Table 9-14
Maximum LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 4 (AWS) 3 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.21	24.21	24.06	0	0
	1	7	24.24	24.34	24.31		0
	1	14	24.19	24.20	24.19		0
	8	0	23.23	23.08	22.94	0-1	1
	8	4	23.20	23.13	22.97		1
	8	7	23.20	23.08	23.03		1
	15	0	23.11	23.01	23.05		1
16QAM	1	0	22.90	22.68	22.77	0-1	1
	1	7	23.14	23.01	22.89		1
	1	14	22.94	22.68	22.81		1
	8	0	21.93	21.91	21.87	0-2	2
	8	4	22.02	21.93	21.90		2
	8	7	22.11	21.99	21.85		2
	15	0	22.28	22.02	22.07		2

Table 9-15
Maximum LTE Band 4 (AWS) Conducted Powers - 1.4 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 4 (AWS) 1.4 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.13	24.08	24.20	0	0
	1	2	24.33	24.21	24.13		0
	1	5	24.25	24.21	24.04		0
	3	0	24.22	24.10	24.14		0
	3	2	24.18	24.12	24.15	0-1	0
	3	3	24.15	24.08	24.10		0
	6	0	23.15	22.97	23.02		1
16QAM	1	0	22.84	22.80	22.70	0-1	1
	1	2	22.94	22.96	22.77		1
	1	5	22.91	22.81	22.69		1
	3	0	23.15	23.11	22.59		1
	3	2	23.38	23.25	22.55	0-2	1
	3	3	23.13	23.33	22.44		1
	6	0	22.30	21.88	21.88		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 37 of 77

9.4.4

LTE Band 25 (PCS)

Table 9-16
Maximum LTE Band 25 (PCS) Conducted Powers - 20 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 20 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26140 (1860.0 MHz)	Mid Channel 26365 (1882.5 MHz)	High Channel 26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.12	24.31	23.89	0	0
	1	50	24.37	24.33	24.31		0
	1	99	24.14	24.02	24.32		0
	50	0	23.37	23.17	23.15	0-1	1
	50	25	23.33	23.12	23.20		1
	50	50	23.44	23.03	23.13		1
	100	0	23.40	23.04	23.19		1
16QAM	1	0	23.49	22.98	23.17	0-1	1
	1	50	23.50	22.65	23.50		1
	1	99	23.16	22.45	23.49		1
	50	0	22.32	22.19	22.17	0-2	2
	50	25	22.37	22.12	22.22		2
	50	50	22.47	22.07	22.33		2
	100	0	22.31	22.07	22.28		2

Table 9-17
Maximum LTE Band 25 (PCS) Conducted Powers - 15 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 15 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26115 (1857.5 MHz)	Mid Channel 26365 (1882.5 MHz)	High Channel 26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.49	24.47	24.17	0	0
	1	36	24.50	24.36	24.32		0
	1	74	24.47	24.32	24.48		0
	36	0	23.47	23.25	23.37	0-1	1
	36	18	23.49	23.29	23.19		1
	36	37	23.43	23.19	23.14		1
	75	0	23.44	23.23	23.16		1
16QAM	1	0	23.50	23.50	23.43	0-1	1
	1	36	23.49	23.41	23.46		1
	1	74	23.50	23.32	23.45		1
	36	0	22.24	22.37	22.34	0-2	2
	36	18	22.48	22.33	22.08		2
	36	37	22.31	22.11	22.03		2
	75	0	22.37	22.39	22.10		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 38 of 77

Table 9-18
Maximum LTE Band 25 (PCS) Conducted Powers - 10 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 10 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26090 (1855.0 MHz)	Mid Channel 26365 (1882.5 MHz)	High Channel 26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.50	24.45	24.50	0	0
	1	25	24.46	24.39	24.26		0
	1	49	24.43	24.23	24.50		0
	25	0	23.28	23.18	23.27	0-1	1
	25	12	23.28	23.15	23.17		1
	25	25	23.24	22.96	23.36		1
	50	0	23.33	23.05	23.29		1
16QAM	1	0	23.50	23.25	23.47	0-1	1
	1	25	23.45	23.46	23.47		1
	1	49	23.47	22.93	23.50		1
	25	0	22.32	22.31	22.38	0-2	2
	25	12	22.21	22.27	22.33		2
	25	25	22.28	22.07	22.47		2
	50	0	22.37	22.06	22.32		2

Table 9-19
Maximum LTE Band 25 (PCS) Conducted Powers - 5 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 5 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26065 (1852.5 MHz)	Mid Channel 26365 (1882.5 MHz)	High Channel 26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.15	23.94	24.29	0	0
	1	12	24.30	24.14	24.50		0
	1	24	24.17	24.19	24.49		0
	12	0	23.29	23.10	23.28	0-1	1
	12	6	23.25	23.13	23.34		1
	12	13	23.14	23.02	23.38		1
	25	0	23.20	22.97	23.33		1
16QAM	1	0	22.81	22.58	23.05	0-1	1
	1	12	22.92	23.14	23.31		1
	1	24	22.89	22.58	23.09		1
	12	0	22.19	22.27	22.31	0-2	2
	12	6	22.16	22.30	22.18		2
	12	13	22.14	22.07	22.34		2
	25	0	22.20	22.11	22.46		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 39 of 77

Table 9-20
Maximum LTE Band 25 (PCS) Conducted Powers - 3 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 3 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.13	24.18	24.47	0	0
	1	7	24.24	24.32	24.50		0
	1	14	24.30	24.15	24.49		0
	8	0	23.33	22.99	23.35	0-1	1
	8	4	23.29	23.03	23.46		1
	8	7	23.28	23.06	23.38		1
	15	0	23.30	23.04	23.46		1
16QAM	1	0	23.47	23.36	23.41	0-1	1
	1	7	23.50	23.50	23.45		1
	1	14	23.48	23.44	23.47		1
	8	0	22.25	22.11	22.50	0-2	2
	8	4	22.11	22.12	22.44		2
	8	7	22.17	22.10	22.40		2
	15	0	22.24	21.98	22.35		2

Table 9-21
Maximum LTE Band 25 (PCS) Conducted Powers - 1.4 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 1.4 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
Conducted Power [dBm]							
QPSK	1	0	24.26	24.18	24.47	0	0
	1	2	24.32	24.32	24.49		0
	1	5	24.27	24.34	24.45		0
	3	0	24.26	24.08	24.50	0-1	0
	3	2	24.33	24.25	24.49		0
	3	3	24.31	24.19	24.38		0
	6	0	23.46	23.00	23.42		1
16QAM	1	0	23.44	22.86	23.27	0-1	1
	1	2	23.36	22.76	23.34		1
	1	5	23.41	22.73	23.35		1
	3	0	23.14	23.13	23.36	0-2	1
	3	2	23.10	23.26	23.50		1
	3	3	23.22	23.31	23.44		1
	6	0	22.26	22.30	22.47		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 40 of 77

Table 9-22
Reduced LTE Band 25 (PCS) Conducted Powers - 20 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 20 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
Conducted Power [dBm]							
QPSK	1	0	22.10	22.34	22.24	0	0
	1	50	22.25	22.50	22.33		0
	1	99	21.88	22.37	21.77		0
	50	0	21.08	21.15	21.17	0-1	1
	50	25	21.10	21.22	21.28		1
	50	50	20.92	21.23	21.19		1
	100	0	21.05	21.20	21.14		1
16QAM	1	0	21.36	21.08	21.17	0-1	1
	1	50	21.38	21.45	21.50		1
	1	99	20.81	20.93	20.87		1
	50	0	20.20	20.20	20.18	0-2	2
	50	25	20.30	20.21	20.20		2
	50	50	20.00	20.41	20.00		2
	100	0	20.04	20.30	20.06		2

Table 9-23
Reduced LTE Band 25 (PCS) Conducted Powers - 15 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 15 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	22.37	22.42	22.47	0	0
	1	36	22.40	22.50	22.47		0
	1	74	22.23	22.43	22.32		0
	36	0	21.44	21.42	21.49	0-1	1
	36	18	21.28	21.46	21.46		1
	36	37	21.23	21.50	21.32		1
	75	0	21.25	21.48	21.37		1
16QAM	1	0	21.06	21.02	21.12	0-1	1
	1	36	21.00	21.15	21.30		1
	1	74	20.80	21.08	20.77		1
	36	0	20.42	20.36	20.50	0-2	2
	36	18	20.47	20.45	20.49		2
	36	37	20.24	20.48	20.32		2
	75	0	20.24	20.45	20.45		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 41 of 77

Table 9-24
Reduced LTE Band 25 (PCS) Conducted Powers - 10 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 10 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
Conducted Power [dBm]							
QPSK	1	0	22.29	22.47	22.45	0	0
	1	25	22.40	22.44	22.50		0
	1	49	22.14	22.48	22.30		0
	25	0	21.30	21.36	21.48	0-1	1
	25	12	21.26	21.39	21.49		1
	25	25	21.05	21.41	21.21		1
	50	0	21.12	21.33	21.37		1
16QAM	1	0	20.95	21.01	21.22	0-1	1
	1	25	21.14	21.47	21.32		1
	1	49	20.83	21.18	20.74		1
	25	0	20.43	20.33	20.50	0-2	2
	25	12	20.36	20.48	20.38		2
	25	25	20.06	20.43	20.22		2
	50	0	20.21	20.42	20.48		2

Table 9-25
Reduced LTE Band 25 (PCS) Conducted Powers - 5 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 5 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Mid Channel	High Channel		
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
Conducted Power [dBm]							
QPSK	1	0	22.16	22.25	22.50	0	0
	1	12	22.25	22.50	22.46		0
	1	24	22.14	22.47	22.16		0
	12	0	21.14	21.26	21.24	0-1	1
	12	6	21.21	21.29	21.21		1
	12	13	21.01	21.35	21.09		1
	25	0	21.17	21.28	21.16		1
16QAM	1	0	20.79	20.84	20.86	0-1	1
	1	12	20.63	21.03	20.73		1
	1	24	20.47	21.01	20.50		1
	12	0	20.12	20.02	20.09	0-2	2
	12	6	20.21	20.39	20.26		2
	12	13	20.23	20.48	19.96		2
	25	0	20.18	20.30	20.27		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 42 of 77

Table 9-26
Reduced LTE Band 25 (PCS) Conducted Powers - 3 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 3 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26055 (1851.5 MHz)	Mid Channel 26365 (1882.5 MHz)	High Channel 26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.30	22.31	22.42	0	0
	1	7	22.36	22.48	22.32		0
	1	14	22.24	22.35	22.14		0
	8	0	21.24	21.27	21.32	0-1	1
	8	4	21.19	21.23	21.30		1
	8	7	21.17	21.34	21.15		1
	15	0	21.16	21.27	21.18		1
16QAM	1	0	20.79	20.92	20.91	0-1	1
	1	7	21.08	21.18	21.01		1
	1	14	20.77	21.03	20.79		1
	8	0	20.08	20.15	20.07	0-2	2
	8	4	20.06	20.21	20.01		2
	8	7	20.04	20.30	20.04		2
	15	0	20.14	20.43	20.26		2

Table 9-27
Reduced LTE Band 25 (PCS) Conducted Powers – 1.4 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 25 (PCS) 1.4 MHz Bandwidth			MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel 26047 (1850.7 MHz)	Mid Channel 26365 (1882.5 MHz)	High Channel 26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.23	22.24	22.08	0	0
	1	2	22.39	22.39	22.14		0
	1	5	22.25	22.33	22.05		0
	3	0	22.22	22.21	22.11	0-1	0
	3	2	22.17	22.24	22.02		0
	3	3	22.22	22.41	21.95		0
	6	0	21.20	21.24	21.00		1
16QAM	1	0	20.73	20.83	20.71	0-1	1
	1	2	21.01	20.91	20.89		1
	1	5	20.69	21.02	20.64		1
	3	0	21.17	21.44	21.28	0-2	1
	3	2	21.33	21.50	21.19		1
	3	3	21.37	21.47	21.11		1
	6	0	20.27	20.32	20.17		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 43 of 77

9.4.5

LTE Band 41

Table 9-28
Maximum LTE Band 41 Conducted Powers - 20 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 41 20 MHz Bandwidth						MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	Conducted Power [dBm]		
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)	Conducted Power [dBm]		
QPSK	1	0	24.14	24.00	23.99	24.20	24.25	Conducted Power [dBm]	0	0
	1	50	24.23	24.07	24.05	24.10	24.10	Conducted Power [dBm]		0
	1	99	23.85	23.80	24.04	24.05	23.96	Conducted Power [dBm]		0
	50	0	22.94	23.22	23.15	23.20	23.15	Conducted Power [dBm]	0-1	1
	50	25	23.12	23.14	23.16	23.23	23.22	Conducted Power [dBm]		1
	50	50	23.09	23.08	23.02	23.13	23.24	Conducted Power [dBm]		1
	100	0	23.08	23.07	23.05	23.21	23.14	Conducted Power [dBm]		1
16QAM	1	0	23.03	23.02	23.00	23.06	23.02	Conducted Power [dBm]	0-1	1
	1	50	23.12	22.92	22.98	22.98	23.08	Conducted Power [dBm]		1
	1	99	23.16	22.76	22.96	22.99	22.95	Conducted Power [dBm]		1
	50	0	22.23	22.17	22.25	22.24	22.15	Conducted Power [dBm]	0-2	2
	50	25	22.21	22.16	22.17	22.13	22.19	Conducted Power [dBm]		2
	50	50	22.20	22.03	22.12	22.14	22.05	Conducted Power [dBm]		2
	100	0	22.18	22.08	22.16	22.06	22.18	Conducted Power [dBm]		2

Table 9-29
Maximum LTE Band 41 Conducted Powers - 15 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 41 15 MHz Bandwidth						MPR Allowed per 3GPP [dB]	MPR [dB]
			Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	Conducted Power [dBm]		
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)	Conducted Power [dBm]		
QPSK	1	0	23.84	23.87	23.65	23.68	23.92	Conducted Power [dBm]	0	0
	1	36	23.78	23.69	23.74	23.77	24.02	Conducted Power [dBm]		0
	1	74	23.71	23.58	23.51	23.75	23.93	Conducted Power [dBm]		0
	36	0	22.87	23.00	23.00	22.98	23.04	Conducted Power [dBm]	0-1	1
	36	18	22.88	22.92	23.02	23.03	23.08	Conducted Power [dBm]		1
	36	37	22.84	22.88	22.86	23.06	22.82	Conducted Power [dBm]		1
	75	0	22.74	22.93	22.97	22.94	23.03	Conducted Power [dBm]		1
16QAM	1	0	22.62	22.75	22.74	22.85	23.34	Conducted Power [dBm]	0-1	1
	1	36	22.54	22.60	22.65	22.71	23.21	Conducted Power [dBm]		1
	1	74	22.26	22.56	22.40	22.26	22.67	Conducted Power [dBm]		1
	36	0	21.92	21.88	21.98	22.01	21.97	Conducted Power [dBm]	0-2	2
	36	18	22.01	21.90	21.76	22.06	22.10	Conducted Power [dBm]		2
	36	37	21.77	21.85	21.91	21.88	21.92	Conducted Power [dBm]		2
	75	0	21.79	21.92	21.81	21.89	22.00	Conducted Power [dBm]		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 44 of 77

Table 9-30
Maximum LTE Band 41 Conducted Powers - 10 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 41 10 MHz Bandwidth					MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.80	23.94	24.06	24.06	24.06	0	0
	1	25	23.98	23.88	23.77	24.16	24.27		0
	1	49	23.67	23.74	23.91	24.05	24.10		0
	25	0	22.93	23.01	22.97	22.96	22.90	0-1	1
	25	12	23.02	22.88	22.95	23.04	23.02		1
	25	25	22.91	22.85	22.90	22.92	22.90		1
	50	0	22.91	22.97	22.95	23.02	22.98		1
16QAM	1	0	22.49	22.86	22.71	22.96	23.18	0-1	1
	1	25	22.64	22.72	22.63	23.00	23.11		1
	1	49	22.32	22.51	22.57	22.68	22.93		1
	25	0	22.02	21.96	21.84	22.08	21.93	0-2	2
	25	12	21.92	21.86	21.86	21.92	21.95		2
	25	25	21.88	21.87	21.78	21.90	21.89		2
	50	0	22.04	21.88	21.78	21.94	21.99		2

Table 9-31
Maximum LTE Band 41 Conducted Powers - 5 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 41 5 MHz Bandwidth					MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.71	23.57	23.76	23.71	23.81	0	0
	1	12	24.06	23.78	23.94	23.87	24.34		0
	1	24	23.90	23.71	23.79	23.65	24.01		0
	12	0	22.91	22.92	22.79	23.03	22.95	0-1	1
	12	6	22.89	22.83	22.88	23.06	22.93		1
	12	13	22.83	22.86	22.86	23.01	22.92		1
	25	0	22.89	22.82	22.79	23.08	22.97		1
16QAM	1	0	23.07	23.06	23.06	23.19	22.91	0-1	1
	1	12	23.44	23.14	23.40	23.40	23.41		1
	1	24	23.23	22.89	23.11	23.15	23.02		1
	12	0	22.33	21.88	21.96	21.81	22.17	0-2	2
	12	6	22.37	21.86	21.94	21.86	22.19		2
	12	13	21.84	21.81	22.18	21.83	21.70		2
	25	0	21.98	21.79	21.90	21.87	21.86		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 45 of 77

Table 9-32
Reduced LTE Band 41 Conducted Powers - 20 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 41 20 MHz Bandwidth					MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.63	21.69	21.95	21.85	22.07	0	0
	1	50	22.13	21.68	22.19	22.09	22.23		0
	1	99	22.01	21.55	21.60	21.83	21.86		0
	50	0	20.78	20.80	21.15	21.00	21.20	0-1	1
	50	25	21.01	20.86	21.18	21.10	20.96		1
	50	50	21.00	20.71	21.12	21.14	20.88		1
	100	0	20.89	20.73	21.09	21.04	21.08		1
	1	0	20.70	20.64	20.89	20.68	20.98		1
16QAM	1	50	21.31	20.55	21.11	20.87	21.35	0-1	1
	1	99	21.08	20.37	20.73	20.76	20.80		1
	50	0	19.85	19.71	20.10	19.97	20.05		2
	50	25	20.19	19.78	20.11	19.91	19.83	0-2	2
	50	50	20.15	19.65	20.05	19.91	19.82		2
	100	0	19.98	19.90	20.06	19.96	19.89		2

Table 9-33
Reduced LTE Band 41 Conducted Powers - 15 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 41 15 MHz Bandwidth					MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.54	21.37	21.68	21.86	22.20	0	0
	1	36	21.82	21.57	21.80	21.92	21.85		0
	1	74	21.80	21.58	21.66	21.91	21.84		0
	36	0	20.40	20.33	20.98	20.76	20.96	0-1	1
	36	18	20.69	20.48	20.85	20.97	20.92		1
	36	37	20.65	20.44	20.79	20.93	20.84		1
	75	0	20.50	20.43	20.85	20.84	20.86		1
	1	0	20.20	20.77	20.56	20.68	20.83	0-1	1
16QAM	1	36	20.34	20.76	20.66	20.68	20.68		1
	1	74	20.57	20.75	20.57	20.72	20.41		1
	36	0	19.57	19.40	19.64	19.80	19.70		2
	36	18	19.75	19.58	19.79	19.93	19.57		2
	36	37	19.69	19.49	19.58	19.89	19.43		2
	75	0	19.57	19.40	19.73	19.82	19.62		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 46 of 77

Table 9-34
Reduced LTE Band 41 Conducted Powers - 10 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 41 10 MHz Bandwidth					MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.62	21.42	21.81	21.83	22.01	0	0
	1	25	22.06	21.64	21.94	22.21	22.04		0
	1	49	21.84	21.72	21.80	21.96	21.82		0
	25	0	20.57	20.50	20.84	20.77	20.98	0-1	1
	25	12	20.70	20.51	20.94	20.95	20.78		1
	25	25	20.60	20.38	20.75	20.98	20.81		1
	50	0	20.64	20.58	20.80	20.94	20.84		1
	1	0	20.33	20.18	20.81	20.73	20.75	0-1	1
16QAM	1	25	20.59	20.28	20.75	20.72	20.61		1
	1	49	20.63	20.11	20.76	20.82	20.68		1
	25	0	19.46	19.47	19.75	19.77	19.85	0-2	2
	25	12	19.80	19.47	19.78	19.87	19.72		2
	25	25	19.78	19.43	19.71	19.92	19.59		2
	50	0	19.70	19.41	19.76	19.78	19.74		2

Table 9-35
Reduced LTE Band 41 Conducted Powers - 5 MHz Bandwidth

Modulation	RB Size	RB Offset	LTE Band 41 5 MHz Bandwidth					MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.41	21.51	21.68	21.89	21.86	0	0
	1	12	22.18	21.85	22.04	22.11	22.19		0
	1	24	21.45	21.53	21.61	21.88	21.75		0
	12	0	20.55	20.46	21.40	20.85	20.89	0-1	1
	12	6	20.68	20.56	20.87	20.98	20.82		1
	12	13	20.68	20.45	20.84	20.84	20.81		1
	25	0	20.64	20.49	20.79	21.02	20.82		1
	1	0	20.70	21.18	21.00	21.43	21.42	0-1	1
16QAM	1	12	21.27	21.40	21.12	21.44	21.40		1
	1	24	20.75	21.19	20.82	21.40	21.30		1
	12	0	19.53	19.40	19.69	19.82	19.77		2
	12	6	19.70	19.44	19.78	19.95	19.79		2
	12	13	19.61	19.40	19.56	19.80	19.68		2
	25	0	19.51	19.47	19.74	19.81	19.70		2

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 47 of 77

9.5 WLAN Conducted Powers

Table 9-36
2.4 GHz WLAN Maximum Average RF Power

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]	
		IEEE Transmission Mode	
		802.11b	802.11g
2412	1	16.92	14.71
2437	6	17.14	14.99
2462	11	17.38	12.17

Table 9-37
2.4 GHz WLAN Reduced Average RF Power

Freq [MHz]	Channel	2.4GHz Conducted Power [dBm]	
		IEEE Transmission Mode	
		802.11b	802.11g
2412	1	15.04	13.93
2437	6	15.26	14.01
2462	11	15.29	12.17

Table 9-38
5 GHz WLAN Maximum Average RF Power

Freq [MHz]	Channel	5GHz (20MHz) Conducted Power [dBm]	
		IEEE Transmission Mode	
		802.11a	
5180	36	13.45	
5200	40	13.42	
5220	44	13.37	
5240	48	13.35	
5260	52	12.84	
5280	56	12.50	
5300	60	12.59	
5320	64	12.69	
5500	100	13.00	
5600	120	12.81	
5620	124	12.92	
5720	144	13.34	
5745	149	12.93	
5785	157	12.99	
5825	165	12.88	

FCC ID: A3LSMJ327P	 SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset	Page 48 of 77

Table 9-39
5 GHz WLAN Reduced Average RF Power

Freq [MHz]	Channel	5GHz (40MHz) Conducted Power [dBm]
		IEEE Transmission Mode
		802.11n
5190	38	10.31
5230	46	10.22
5270	54	10.46
5310	62	10.22
5510	102	10.24
5590	118	9.73
5630	126	9.80
5710	142	9.76
5755	151	10.34
5795	159	10.11

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

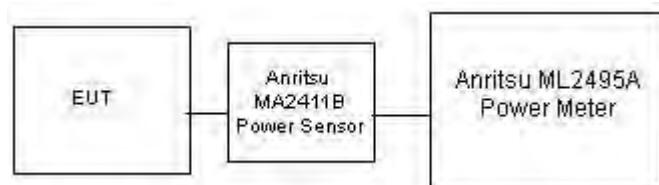


Figure 9-4
Power Measurement Setup

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset			Page 49 of 77

10 SYSTEM VERIFICATION

10.1 Tissue Verification

Table 10-1
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
9/26/2016	750H	20.7	700	0.855	42.905	0.889	42.201	-3.82%	1.67%
			710	0.865	42.733	0.890	42.149	-2.81%	1.39%
			740	0.895	42.280	0.893	41.994	0.22%	0.68%
			755	0.909	42.071	0.894	41.916	1.68%	0.37%
9/26/2016	835H	23.2	820	0.894	41.021	0.899	41.578	-0.56%	-1.34%
			835	0.907	40.873	0.900	41.500	0.78%	-1.51%
			850	0.923	40.657	0.916	41.500	0.76%	-2.03%
9/27/2016	1750H	21.5	1710	1.335	38.778	1.348	40.142	-0.96%	-3.40%
			1750	1.379	38.637	1.371	40.079	0.58%	-3.60%
			1790	1.417	38.378	1.394	40.016	1.65%	-4.09%
10/6/2016	1750H	21.6	1710	1.352	40.726	1.348	40.142	0.30%	1.45%
			1750	1.393	40.529	1.371	40.079	1.60%	1.12%
			1790	1.437	40.369	1.394	40.016	3.08%	0.88%
9/27/2016	1900H	22.0	1850	1.385	39.972	1.400	40.000	-1.07%	-0.07%
			1880	1.419	39.836	1.400	40.000	1.36%	-0.41%
			1910	1.446	39.713	1.400	40.000	3.29%	-0.72%
9/22/2016	2450H	23.8	2400	1.798	38.691	1.756	39.289	2.39%	-1.52%
			2450	1.857	38.465	1.800	39.200	3.17%	-1.88%
			2500	1.911	38.326	1.855	39.136	3.02%	-2.07%
9/27/2016	2600H	22.8	2600	2.047	37.573	1.964	39.009	4.23%	-3.68%
			2650	2.102	37.385	2.018	38.945	4.16%	-4.01%
			2700	2.155	37.205	2.073	38.882	3.96%	-4.31%
09/26/2016	5250H-5750H	21.0	5240	4.682	35.513	4.696	35.940	-0.30%	-1.19%
			5260	4.701	35.473	4.717	35.917	-0.34%	-1.24%
			5280	4.709	35.445	4.737	35.894	-0.59%	-1.25%
			5500	4.932	35.113	4.963	35.643	-0.62%	-1.49%
			5520	4.960	35.105	4.983	35.620	-0.46%	-1.45%
			5600	5.038	34.983	5.065	35.529	-0.53%	-1.54%
			5745	5.194	34.754	5.214	35.363	-0.38%	-1.72%
			5765	5.234	34.737	5.234	35.340	0.00%	-1.71%

FCC ID: A3LSMJ327P	 SAR EVALUATION REPORT	 Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset

Table 10-2
Measured Body Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
9/26/2016	750B	20.7	700	0.915	55.177	0.959	55.726	-4.59%	-0.99%
			710	0.924	55.074	0.960	55.687	-3.75%	-1.10%
			740	0.952	54.735	0.963	55.570	-1.14%	-1.50%
			755	0.966	54.548	0.964	55.512	0.21%	-1.74%
9/26/2016	835B	20.4	820	0.975	54.571	0.969	55.258	0.62%	-1.24%
			835	0.987	54.389	0.970	55.200	1.75%	-1.47%
			850	1.006	54.267	0.988	55.154	1.82%	-1.61%
9/28/2016	835B	22.3	820	0.967	54.188	0.969	55.258	-0.21%	-1.94%
			835	0.982	54.026	0.970	55.200	1.24%	-2.13%
			850	0.996	53.877	0.988	55.154	0.81%	-2.32%
9/27/2016	1750B	21.5	1710	1.433	51.563	1.463	53.537	-2.05%	-3.69%
			1750	1.475	51.402	1.488	53.432	-0.87%	-3.80%
			1790	1.518	51.231	1.514	53.326	0.26%	-3.93%
10/6/2016	1750B	21.1	1710	1.468	51.463	1.463	53.537	0.34%	-3.87%
			1750	1.516	51.306	1.488	53.432	1.88%	-3.98%
			1790	1.564	51.194	1.514	53.326	3.30%	-4.00%
9/26/2016	1900B	22.5	1850	1.521	54.185	1.520	53.300	0.07%	1.66%
			1880	1.557	54.098	1.520	53.300	2.43%	1.50%
			1910	1.591	53.989	1.520	53.300	4.67%	1.29%
9/29/2016	1900B	20.6	1850	1.501	54.180	1.520	53.300	-1.25%	1.65%
			1880	1.539	54.044	1.520	53.300	1.25%	1.40%
			1910	1.579	53.954	1.520	53.300	3.88%	1.23%
9/25/2016	2450B	23.1	2400	1.921	51.292	1.902	52.767	1.00%	-2.80%
			2450	1.999	51.171	1.950	52.700	2.51%	-2.90%
			2500	2.059	50.968	2.021	52.636	1.88%	-3.17%
9/26/2016	2600B	23.1	2600	2.215	50.528	2.163	52.509	2.40%	-3.77%
			2650	2.286	50.364	2.234	52.445	2.33%	-3.97%
			2700	2.355	50.128	2.305	52.382	2.17%	-4.30%
09/22/2016	5250B-5750B	22.7	5240	5.410	47.654	5.346	48.960	1.20%	-2.67%
			5260	5.433	47.634	5.369	48.933	1.19%	-2.65%
			5600	5.870	47.050	5.766	48.471	1.80%	-2.93%
			5700	6.014	46.879	5.883	48.336	2.23%	-3.01%
			5745	6.073	46.808	5.936	48.275	2.31%	-3.04%
			5765	6.093	46.803	5.959	48.248	2.25%	-2.99%
			5785	6.125	46.774	5.982	48.220	2.39%	-3.00%
10/13/2016	5750B	22.1	5745	6.141	47.256	5.936	48.275	3.45%	-2.11%
			5765	6.173	47.232	5.959	48.248	3.59%	-2.11%
			5785	6.183	47.224	5.982	48.220	3.36%	-2.07%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 51 of 77

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 10-3
System Verification Results

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
J	750	HEAD	09/26/2016	21.3	20.7	0.200	1054	3318	1.710	8.220	8.550	4.01%
C	835	HEAD	09/26/2016	24.2	23.2	0.200	4d132	7410	1.900	9.470	9.500	0.32%
D	1750	HEAD	09/27/2016	23.0	21.8	0.100	1008	3213	3.880	36.700	38.800	5.72%
D	1750	HEAD	10/06/2016	22.4	21.8	0.100	1148	3213	3.730	36.200	37.300	3.04%
A	1900	HEAD	09/27/2016	23.7	22.0	0.100	5d148	3022	4.110	39.900	41.100	3.01%
K	2450	HEAD	09/22/2016	22.9	23.1	0.100	981	7409	5.490	52.800	54.900	3.98%
K	2600	HEAD	09/27/2016	22.9	22.5	0.100	1126	7409	6.040	56.300	60.400	7.28%
D	5250	HEAD	09/26/2016	21.3	21.0	0.050	1237	3914	3.820	79.200	76.400	-3.54%
D	5600	HEAD	09/26/2016	21.3	21.0	0.050	1237	3914	4.050	83.300	81.000	-2.76%
D	5750	HEAD	09/26/2016	21.3	21.0	0.050	1237	3914	3.720	81.500	74.400	-8.71%
H	750	BODY	09/26/2016	20.7	20.7	0.200	1161	3319	1.790	8.430	8.950	6.17%
E	835	BODY	09/26/2016	21.7	20.4	0.200	4d133	7406	1.990	9.500	9.950	4.74%
E	835	BODY	09/28/2016	22.6	22.3	0.200	4d133	7406	2.020	9.500	10.100	6.32%
J	1750	BODY	09/27/2016	22.7	21.5	0.100	1008	3318	3.690	37.300	36.900	-1.07%
E	1750	BODY	10/06/2016	22.5	21.4	0.100	1008	7406	3.940	37.300	39.400	5.63%
H	1900	BODY	09/26/2016	21.4	22.4	0.100	5d080	3319	4.120	39.100	41.200	5.37%
H	1900	BODY	09/29/2016	20.7	20.6	0.100	5d080	3319	4.100	39.100	41.000	4.86%
G	2450	BODY	09/25/2016	22.4	22.1	0.100	981	3334	5.420	50.800	54.200	6.69%
G	2600	BODY	09/26/2016	22.6	22.3	0.100	1126	3334	5.740	54.500	57.400	5.32%
D	5250	BODY	09/22/2016	22.6	22.7	0.050	1237	3914	3.470	74.800	69.400	-7.22%
D	5750	BODY	09/22/2016	22.6	22.7	0.050	1237	3914	3.510	75.400	70.200	-6.90%
D	5750	BODY	10/13/2016	21.8	21.4	0.050	1237	3914	3.490	75.400	69.800	-7.43%

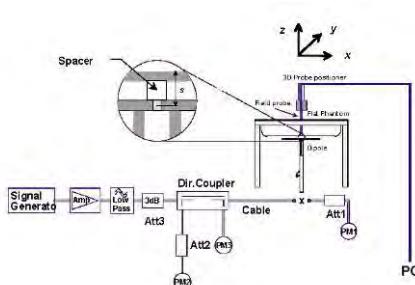


Figure 10-1
System Verification Setup Diagram



Figure 10-2
System Verification Setup Photo

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 52 of 77

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

Table 11-1
CDMA BC10 (§90S) Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	24.0	23.71	0.03	Right	Cheek	04122	1:1	0.343	1.069	0.367	A1
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	24.0	23.71	0.11	Right	Tilt	04122	1:1	0.185	1.069	0.198	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	24.0	23.71	-0.15	Left	Cheek	04122	1:1	0.293	1.069	0.313	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	24.0	23.71	0.14	Left	Tilt	04122	1:1	0.172	1.069	0.184	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	24.0	23.65	0.09	Right	Cheek	04122	1:1	0.320	1.084	0.347	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	24.0	23.65	0.10	Right	Tilt	04122	1:1	0.198	1.084	0.215	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	24.0	23.65	0.01	Left	Cheek	04122	1:1	0.283	1.084	0.307	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	24.0	23.65	0.00	Left	Tilt	04122	1:1	0.184	1.084	0.199	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-2
CDMA BC0 (§22H) Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	24.0	23.58	0.04	Right	Cheek	04122	1:1	0.324	1.102	0.357	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	24.0	23.58	0.01	Right	Tilt	04122	1:1	0.155	1.102	0.171	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	24.0	23.58	0.04	Left	Cheek	04122	1:1	0.313	1.102	0.345	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	24.0	23.58	0.04	Left	Tilt	04122	1:1	0.154	1.102	0.170	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	24.0	23.58	0.12	Right	Cheek	04122	1:1	0.345	1.102	0.380	A2
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	24.0	23.58	0.14	Right	Tilt	04122	1:1	0.172	1.102	0.190	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	24.0	23.58	-0.01	Left	Cheek	04122	1:1	0.305	1.102	0.336	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	24.0	23.58	0.09	Left	Tilt	04122	1:1	0.156	1.102	0.172	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT					Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset				Page 53 of 77	

Table 11-3
PCS CDMA Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	600	PCS CDMA	RC3 / SO55	23.0	22.32	-0.01	Right	Cheek	04155	1:1	0.154		1.169	0.180
1880.00	600	PCS CDMA	RC3 / SO55	23.0	22.32	0.10	Right	Tilt	04155	1:1	0.086		1.169	0.101
1880.00	600	PCS CDMA	RC3 / SO55	23.0	22.32	-0.03	Left	Cheek	04155	1:1	0.264		1.169	0.309
1880.00	600	PCS CDMA	RC3 / SO55	23.0	22.32	0.02	Left	Tilt	04155	1:1	0.106		1.169	0.124
1880.00	600	PCS CDMA	EVDO Rev. A	23.0	22.35	0.03	Right	Cheek	04155	1:1	0.180		1.161	0.209
1880.00	600	PCS CDMA	EVDO Rev. A	23.0	22.35	0.07	Right	Tilt	04155	1:1	0.079		1.161	0.092
1880.00	600	PCS CDMA	EVDO Rev. A	23.0	22.35	0.11	Left	Cheek	04155	1:1	0.274		1.161	0.318
1880.00	600	PCS CDMA	EVDO Rev. A	23.0	22.35	0.07	Left	Tilt	04155	1:1	0.113		1.161	0.131
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11-4
GSM 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.0	31.93	0.03	Right	Cheek	04148	1:8.3	0.194		1.279	0.248
836.60	190	GSM 850	GSM	33.0	31.93	0.00	Right	Tilt	04148	1:8.3	0.079		1.279	0.101
836.60	190	GSM 850	GSM	33.0	31.93	-0.01	Left	Cheek	04148	1:8.3	0.165		1.279	0.211
836.60	190	GSM 850	GSM	33.0	31.93	-0.01	Left	Tilt	04148	1:8.3	0.081		1.279	0.104
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11-5
GSM 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	28.0	27.17	0.03	Right	Cheek	04122	1:8.3	0.088		1.211	0.107
1880.00	661	GSM 1900	GSM	28.0	27.17	0.02	Right	Tilt	04122	1:8.3	0.041		1.211	0.050
1880.00	661	GSM 1900	GSM	28.0	27.17	0.04	Left	Cheek	04122	1:8.3	0.103		1.211	0.125
1880.00	661	GSM 1900	GSM	28.0	27.17	-0.02	Left	Tilt	04122	1:8.3	0.056		1.211	0.068
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT							Reviewed by:
Document S/N:	Test Dates:	DUT Type:						Quality Manager	Page 54 of 77
0Y1609221585.A3L	09/22/16 - 10/13/16	Portable Handset						Page 54 of 77	

Table 11-6
UMTS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	23.5	23.09	0.05	Right	Cheek	04148	1:1	0.259	1.099	0.285	A6
836.60	4183	UMTS 850	RMC	23.5	23.09	0.03	Right	Tilt	04148	1:1	0.122	1.099	0.134	
836.60	4183	UMTS 850	RMC	23.5	23.09	0.04	Left	Cheek	04148	1:1	0.208	1.099	0.229	
836.60	4183	UMTS 850	RMC	23.5	23.09	0.07	Left	Tilt	04148	1:1	0.108	1.099	0.119	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11-7
UMTS 1750 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	23.5	23.16	-0.05	Right	Cheek	01664	1:1	0.279	1.081	0.302	
1732.40	1412	UMTS 1750	RMC	23.5	23.16	0.02	Right	Tilt	01664	1:1	0.170	1.081	0.184	
1732.40	1412	UMTS 1750	RMC	23.5	23.16	0.02	Left	Cheek	01664	1:1	0.452	1.081	0.489	A7
1732.40	1412	UMTS 1750	RMC	23.5	23.16	0.01	Left	Tilt	01664	1:1	0.198	1.081	0.214	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 11-8
UMTS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	21.5	21.11	0.09	Right	Cheek	04122	1:1	0.142	1.094	0.155	
1880.00	9400	UMTS 1900	RMC	21.5	21.11	0.04	Right	Tilt	04122	1:1	0.062	1.094	0.068	
1880.00	9400	UMTS 1900	RMC	21.5	21.11	0.06	Left	Cheek	04122	1:1	0.182	1.094	0.199	A8
1880.00	9400	UMTS 1900	RMC	21.5	21.11	0.01	Left	Tilt	04122	1:1	0.083	1.094	0.091	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 55 of 77

Table 11-9
LTE Band 12 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)	(W/kg)			
707.50	23095	Mid	LTE Band 12	10	24.0	23.49	0.00	0	Right	Cheek	QPSK	1	25	04106	1:1	0.210	1.125	0.236	A9
707.50	23095	Mid	LTE Band 12	10	23.0	22.34	0.00	1	Right	Cheek	QPSK	25	25	04106	1:1	0.158	1.164	0.184	
707.50	23095	Mid	LTE Band 12	10	24.0	23.49	0.14	0	Right	Tilt	QPSK	1	25	04106	1:1	0.134	1.125	0.151	
707.50	23095	Mid	LTE Band 12	10	23.0	22.34	-0.04	1	Right	Tilt	QPSK	25	25	04106	1:1	0.106	1.164	0.123	
707.50	23095	Mid	LTE Band 12	10	24.0	23.49	0.04	0	Left	Cheek	QPSK	1	25	04106	1:1	0.204	1.125	0.230	
707.50	23095	Mid	LTE Band 12	10	23.0	22.34	-0.15	1	Left	Cheek	QPSK	25	25	04106	1:1	0.152	1.164	0.177	
707.50	23095	Mid	LTE Band 12	10	24.0	23.49	-0.10	0	Left	Tilt	QPSK	1	25	04106	1:1	0.135	1.125	0.152	
707.50	23095	Mid	LTE Band 12	10	23.0	22.34	-0.03	1	Left	Tilt	QPSK	25	25	04106	1:1	0.100	1.164	0.116	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-10
LTE Band 26 (Cell) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)	(W/kg)			
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.45	-0.10	0	Right	Cheek	QPSK	1	74	04106	1:1	0.302	1.012	0.306	A10
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	0.05	1	Right	Cheek	QPSK	36	37	04106	1:1	0.259	1.094	0.283	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.45	0.08	0	Right	Tilt	QPSK	1	74	04106	1:1	0.164	1.012	0.166	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	-0.02	1	Right	Tilt	QPSK	36	37	04106	1:1	0.129	1.094	0.141	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.45	-0.04	0	Left	Cheek	QPSK	1	74	04106	1:1	0.258	1.012	0.261	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	0.00	1	Left	Cheek	QPSK	36	37	04106	1:1	0.225	1.094	0.246	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.45	0.00	0	Left	Tilt	QPSK	1	74	04106	1:1	0.141	1.012	0.143	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	0.05	1	Left	Tilt	QPSK	36	37	04106	1:1	0.127	1.094	0.139	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-11
LTE Band 4 (AWS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)	(W/kg)			
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	24.34	0.10	0	Right	Cheek	QPSK	1	50	04114	1:1	0.171	1.038	0.177	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.99	0.06	1	Right	Cheek	QPSK	50	0	04114	1:1	0.130	1.125	0.146	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	24.34	0.03	0	Right	Tilt	QPSK	1	50	04114	1:1	0.130	1.038	0.135	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.99	0.04	1	Right	Tilt	QPSK	50	0	04114	1:1	0.097	1.125	0.109	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	24.34	-0.02	0	Left	Cheek	QPSK	1	50	04114	1:1	0.374	1.038	0.388	A11
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.99	0.03	1	Left	Cheek	QPSK	50	0	04114	1:1	0.280	1.125	0.315	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	24.34	0.04	0	Left	Tilt	QPSK	1	50	04114	1:1	0.143	1.038	0.148	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.99	0.05	1	Left	Tilt	QPSK	50	0	04114	1:1	0.107	1.125	0.120	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT											Reviewed by:		
Document S/N:	0Y1609221585.A3L	Test Dates:	09/22/16 - 10/13/16	DUT Type:	Portable Handset										Quality Manager

Table 11-12
LTE Band 25 (PCS) Head SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.														(W/kg)	(W/kg)		
1882.50	26365	Mid	LTE Band 25 (PCS)	20	22.5	22.50	0.04	0	Right	Cheek	QPSK	1	50	04155	1:1	0.168	1.000	0.168
1905.00	26590	High	LTE Band 25 (PCS)	20	21.5	21.28	-0.05	1	Right	Cheek	QPSK	50	25	04155	1:1	0.148	1.052	0.156
1882.50	26365	Mid	LTE Band 25 (PCS)	20	22.5	22.50	-0.07	0	Right	Tilt	QPSK	1	50	04155	1:1	0.079	1.000	0.079
1905.00	26590	High	LTE Band 25 (PCS)	20	21.5	21.28	0.09	1	Right	Tilt	QPSK	50	25	04155	1:1	0.063	1.052	0.066
1882.50	26365	Mid	LTE Band 25 (PCS)	20	22.5	22.50	-0.11	0	Left	Cheek	QPSK	1	50	04155	1:1	0.254	1.000	0.254 A12
1905.00	26590	High	LTE Band 25 (PCS)	20	21.5	21.28	0.03	1	Left	Cheek	QPSK	50	25	04155	1:1	0.177	1.052	0.186
1882.50	26365	Mid	LTE Band 25 (PCS)	20	22.5	22.50	0.13	0	Left	Tilt	QPSK	1	50	04155	1:1	0.126	1.000	0.126
1905.00	26590	High	LTE Band 25 (PCS)	20	21.5	21.28	-0.09	1	Left	Tilt	QPSK	50	25	04155	1:1	0.092	1.052	0.097
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 11-13
LTE Band 41 Head SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.														(W/kg)	(W/kg)		
2680.00	41490	High	LTE Band 41	20	22.5	22.23	0.04	0	Right	Cheek	QPSK	1	50	04155	1:1.58	0.124	1.064	0.132
2680.00	41490	High	LTE Band 41	20	21.5	21.20	-0.04	1	Right	Cheek	QPSK	50	0	04155	1:1.58	0.099	1.072	0.106
2680.00	41490	High	LTE Band 41	20	22.5	22.23	-0.12	0	Right	Tilt	QPSK	1	50	04155	1:1.58	0.166	1.064	0.177
2680.00	41490	High	LTE Band 41	20	21.5	21.20	0.06	1	Right	Tilt	QPSK	50	0	04155	1:1.58	0.134	1.072	0.144
2680.00	41490	High	LTE Band 41	20	22.5	22.23	0.07	0	Left	Cheek	QPSK	1	50	04155	1:1.58	0.247	1.064	0.263 A13
2680.00	41490	High	LTE Band 41	20	21.5	21.20	0.10	1	Left	Cheek	QPSK	50	0	04155	1:1.58	0.212	1.072	0.227
2680.00	41490	High	LTE Band 41	20	22.5	22.23	0.18	0	Left	Tilt	QPSK	1	50	04155	1:1.58	0.113	1.064	0.120
2680.00	41490	High	LTE Band 41	20	21.5	21.20	-0.12	1	Left	Tilt	QPSK	50	0	04155	1:1.58	0.093	1.072	0.100
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 11-14
DTS Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (W/kg)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.															(W/kg)	(W/kg)		
2462	11	802.11b	DSSS	22	15.5	15.29	0.09	Right	Cheek	03892	1	99.0	0.919	0.573	1.050	1.010	0.608		
2462	11	802.11b	DSSS	22	15.5	15.29	0.04	Right	Tilt	03892	1	99.0	0.902	0.578	1.050	1.010	0.613 A14		
2462	11	802.11b	DSSS	22	15.5	15.29	-0.11	Left	Cheek	03892	1	99.0	0.761	-	1.050	1.010	-		
2462	11	802.11b	DSSS	22	15.5	15.29	0.04	Left	Tilt	03892	1	99.0	0.726	-	1.050	1.010	-		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMJ327P



SAR EVALUATION REPORT



Reviewed by:

Quality Manager

Document S/N:
0Y1609221585.A3L

Test Dates:
09/22/16 - 10/13/16

DUT Type:
Portable Handset

Page 57 of 77

Table 11-15
NII Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	(W/kg)	Plot #
MHz	Ch.																		
5270	54	802.11n	OFDM	40	10.5	10.46	0.07	Right	Cheek	03892	13.5	97.7	1.231	0.536	1.009	1.024	0.554		
5270	54	802.11n	OFDM	40	10.5	10.46	0.06	Right	Tilt	03892	13.5	97.7	1.346	0.573	1.009	1.024	0.592	A15	
5270	54	802.11n	OFDM	40	10.5	10.46	0.15	Left	Cheek	03892	13.5	97.7	1.114	-	1.009	1.024	-		
5270	54	802.11n	OFDM	40	10.5	10.46	0.08	Left	Tilt	03892	13.5	97.7	1.023	-	1.009	1.024	-		
5510	102	802.11n	OFDM	40	10.5	10.24	0.16	Right	Cheek	03892	13.5	97.7	0.805	-	1.062	1.024	-		
5510	102	802.11n	OFDM	40	10.5	10.24	0.11	Right	Tilt	03892	13.5	97.7	0.913	-	1.062	1.024	-		
5510	102	802.11n	OFDM	40	10.5	10.24	0.19	Left	Cheek	03892	13.5	97.7	1.140	0.443	1.062	1.024	0.482		
5510	102	802.11n	OFDM	40	10.5	10.24	0.15	Left	Tilt	03892	13.5	97.7	1.145	0.446	1.062	1.024	0.485		
5755	151	802.11n	OFDM	40	10.5	10.34	0.04	Right	Cheek	03892	13.5	97.7	1.068	-	1.038	1.024	-		
5755	151	802.11n	OFDM	40	10.5	10.34	0.14	Right	Tilt	03892	13.5	97.7	0.996	-	1.038	1.024	-		
5755	151	802.11n	OFDM	40	10.5	10.34	0.16	Left	Cheek	03892	13.5	97.7	1.486	0.481	1.038	1.024	0.511		
5755	151	802.11n	OFDM	40	10.5	10.34	0.17	Left	Tilt	03892	13.5	97.7	1.556	0.559	1.038	1.024	0.594		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Head										
Spatial Peak									1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population									averaged over 1 gram										

11.2 Standalone Body-Worn SAR Data

Table 11-16
GSM/UMTS/CDMA Body-Worn SAR Data

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	(W/kg)	Plot #
MHz	Ch.																
820.10	564	CDMA BC10 (\$90S)	TDSO / SO32	24.5	24.01	0.00	15 mm	04106	N/A	1:1	back	0.428	1.119	0.479	A16		
836.52	384	CDMA BC0 (\$22H)	TDSO / SO32	24.5	24.00	0.05	15 mm	04106	N/A	1:1	back	0.414	1.122	0.465	A18		
1880.00	600	PCS CDMA	TDSO / SO32	25.0	24.24	-0.05	15 mm	04106	N/A	1:1	back	0.342	1.191	0.407	A20		
836.60	190	GSM 850	GSM	33.0	31.93	-0.03	15 mm	04148	1	1:8.3	back	0.254	1.279	0.325	A22		
1880.00	661	GSM 1900	GSM	30.0	28.87	-0.01	15 mm	04148	1	1:8.3	back	0.152	1.297	0.197	A24		
836.60	4183	UMTS 850	RMC	23.5	23.09	0.00	15 mm	04148	N/A	1:1	back	0.331	1.099	0.364	A26		
1732.40	1412	UMTS 1750	RMC	23.5	23.16	0.01	15 mm	01664	N/A	1:1	back	0.455	1.081	0.492	A28		
1880.00	9400	UMTS 1900	RMC	23.5	23.06	-0.04	15 mm	04148	N/A	1:1	back	0.332	1.107	0.368	A30		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body								
Spatial Peak									1.6 W/kg (mW/g)								
Uncontrolled Exposure/General Population									averaged over 1 gram								

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 58 of 77

Table 11-17
LTE Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Reported SAR (1g)	Scaling Factor	Plot #	
MHz	Ch.														(W/kg)	(W/kg)			
707.50	23095	Mid	LTE Band 12	10	24.0	23.49	0.17	0	04106	QPSK	1	25	15 mm	back	1:1	0.305	1.125	0.343	A32
707.50	23095	Mid	LTE Band 12	10	23.0	22.34	-0.04	1	04106	QPSK	25	25	15 mm	back	1:1	0.220	1.164	0.256	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.45	0.05	0	04106	QPSK	1	74	15 mm	back	1:1	0.451	1.012	0.456	A34
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.5	23.11	-0.03	1	04106	QPSK	36	37	15 mm	back	1:1	0.347	1.094	0.380	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	24.34	-0.02	0	04114	QPSK	1	50	15 mm	back	1:1	0.506	1.038	0.525	A36
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.99	0.03	1	04114	QPSK	50	0	15 mm	back	1:1	0.369	1.125	0.415	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.37	-0.07	0	04106	QPSK	1	50	15 mm	back	1:1	0.344	1.030	0.354	A38
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.5	23.44	0.03	1	04106	QPSK	50	50	15 mm	back	1:1	0.248	1.014	0.251	
2680.00	41490	High	LTE Band 41	20	24.5	24.25	-0.06	0	04106	QPSK	1	0	15 mm	back	1:1.58	0.390	1.059	0.413	A40
2680.00	41490	High	LTE Band 41	20	23.5	23.24	0.03	1	04106	QPSK	50	50	15 mm	back	1:1.58	0.300	1.062	0.319	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body									
Spatial Peak										1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population										averaged over 1 gram									

Table 11-18
DTS Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #	
MHz	Ch.													(W/kg)	(W/kg)				
2462	11	802.11b	DSSS	22	17.5	17.38	-0.05	15 mm	03892	1	back	99.0	99.0	0.166	0.134	1.028	1.010	0.139	A42
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body									
Spatial Peak										1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population										averaged over 1 gram									

Table 11-19
NII Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #	
MHz	Ch.													(W/kg)	(W/kg)				
5260	52	802.11a	OFDM	20	13.5	12.84	-0.17	15 mm	03892	6	back	98.7	98.7	0.177	0.090	1.164	1.013	0.106	A44
5720	144	802.11a	OFDM	20	13.5	13.34	0.07	15 mm	03892	6	back	98.7	98.7	0.138	0.063	1.038	1.013	0.066	
5785	157	802.11a	OFDM	20	13.5	12.99	0.16	15 mm	03892	6	back	98.7	98.7	0.112	0.055	1.125	1.013	0.063	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body									
Spatial Peak										1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population										averaged over 1 gram									

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 59 of 77

11.3 Standalone Hotspot SAR Data

Table 11-20
GPRS/UMTS/CDMA Hotspot SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	24.0	23.66	0.03	10 mm	04155	N/A	1:1	back	0.461	1.081	0.498	A17
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	24.0	23.66	0.02	10 mm	04155	N/A	1:1	front	0.335	1.081	0.362	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	24.0	23.66	0.09	10 mm	04155	N/A	1:1	bottom	0.041	1.081	0.044	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	24.0	23.66	0.01	10 mm	04155	N/A	1:1	right	0.269	1.081	0.291	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	24.0	23.66	0.00	10 mm	04155	N/A	1:1	left	0.299	1.081	0.323	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	24.0	23.50	0.03	10 mm	04155	N/A	1:1	back	0.457	1.122	0.513	A19
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	24.0	23.50	0.02	10 mm	04155	N/A	1:1	front	0.343	1.122	0.385	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	24.0	23.50	0.07	10 mm	04155	N/A	1:1	bottom	0.051	1.122	0.057	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	24.0	23.50	-0.12	10 mm	04155	N/A	1:1	right	0.329	1.122	0.369	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	24.0	23.50	-0.02	10 mm	04155	N/A	1:1	left	0.359	1.122	0.403	
1880.00	600	PCS CDMA	EVDO Rev. 0	23.0	22.32	-0.01	10 mm	04155	N/A	1:1	back	0.345	1.169	0.403	
1880.00	600	PCS CDMA	EVDO Rev. 0	23.0	22.32	-0.02	10 mm	04155	N/A	1:1	front	0.443	1.169	0.518	A21
1880.00	600	PCS CDMA	EVDO Rev. 0	23.0	22.32	0.01	10 mm	04155	N/A	1:1	bottom	0.419	1.169	0.490	
1880.00	600	PCS CDMA	EVDO Rev. 0	23.0	22.32	0.07	10 mm	04155	N/A	1:1	right	0.051	1.169	0.060	
1880.00	600	PCS CDMA	EVDO Rev. 0	23.0	22.32	-0.02	10 mm	04155	N/A	1:1	left	0.262	1.169	0.306	
836.60	190	GSM 850	GPRS	28.0	27.81	0.05	10 mm	04148	3	1:2.76	back	0.295	1.045	0.308	A23
836.60	190	GSM 850	GPRS	28.0	27.81	-0.05	10 mm	04148	3	1:2.76	front	0.211	1.045	0.220	
836.60	190	GSM 850	GPRS	28.0	27.81	0.11	10 mm	04148	3	1:2.76	bottom	0.036	1.045	0.038	
836.60	190	GSM 850	GPRS	28.0	27.81	-0.02	10 mm	04148	3	1:2.76	right	0.208	1.045	0.217	
836.60	190	GSM 850	GPRS	28.0	27.81	-0.02	10 mm	04148	3	1:2.76	left	0.201	1.045	0.210	
1880.00	661	GSM 1900	GPRS	24.5	23.76	-0.05	10 mm	04122	4	1:2.076	back	0.318	1.186	0.377	A25
1880.00	661	GSM 1900	GPRS	24.5	23.76	0.02	10 mm	04122	4	1:2.076	front	0.302	1.186	0.358	
1880.00	661	GSM 1900	GPRS	24.5	23.76	-0.20	10 mm	04122	4	1:2.076	bottom	0.286	1.186	0.339	
1880.00	661	GSM 1900	GPRS	24.5	23.76	-0.05	10 mm	04122	4	1:2.076	right	0.046	1.186	0.055	
1880.00	661	GSM 1900	GPRS	24.5	23.76	-0.10	10 mm	04122	4	1:2.076	left	0.150	1.186	0.178	
836.60	4183	UMTS 850	RMC	23.5	23.09	-0.03	10 mm	04148	N/A	1:1	back	0.367	1.099	0.403	A27
836.60	4183	UMTS 850	RMC	23.5	23.09	0.00	10 mm	04148	N/A	1:1	front	0.269	1.099	0.296	
836.60	4183	UMTS 850	RMC	23.5	23.09	0.13	10 mm	04148	N/A	1:1	bottom	0.050	1.099	0.055	
836.60	4183	UMTS 850	RMC	23.5	23.09	0.01	10 mm	04148	N/A	1:1	right	0.275	1.099	0.302	
836.60	4183	UMTS 850	RMC	23.5	23.09	0.02	10 mm	04148	N/A	1:1	left	0.277	1.099	0.304	
1712.40	1312	UMTS 1750	RMC	23.5	23.12	0.12	10 mm	01664	N/A	1:1	back	0.739	1.091	0.806	
1732.40	1412	UMTS 1750	RMC	23.5	23.16	-0.01	10 mm	01664	N/A	1:1	back	0.770	1.081	0.832	A29
1752.60	1513	UMTS 1750	RMC	23.5	23.07	-0.01	10 mm	01664	N/A	1:1	back	0.705	1.104	0.778	
1732.40	1412	UMTS 1750	RMC	23.5	23.16	-0.10	10 mm	01664	N/A	1:1	front	0.698	1.081	0.755	
1732.40	1412	UMTS 1750	RMC	23.5	23.16	-0.02	10 mm	01664	N/A	1:1	bottom	0.293	1.081	0.317	
1732.40	1412	UMTS 1750	RMC	23.5	23.16	0.07	10 mm	01664	N/A	1:1	right	0.077	1.081	0.083	
1732.40	1412	UMTS 1750	RMC	23.5	23.16	-0.01	10 mm	01664	N/A	1:1	left	0.361	1.081	0.390	
1880.00	9400	UMTS 1900	RMC	21.5	21.11	0.06	10 mm	04122	N/A	1:1	back	0.314	1.094	0.344	A31
1880.00	9400	UMTS 1900	RMC	21.5	21.11	0.01	10 mm	04122	N/A	1:1	front	0.278	1.094	0.304	
1880.00	9400	UMTS 1900	RMC	21.5	21.11	-0.01	10 mm	04122	N/A	1:1	bottom	0.305	1.094	0.334	
1880.00	9400	UMTS 1900	RMC	21.5	21.11	-0.01	10 mm	04122	N/A	1:1	right	0.039	1.094	0.043	
1880.00	9400	UMTS 1900	RMC	21.5	21.11	-0.01	10 mm	04122	N/A	1:1	left	0.135	1.094	0.148	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 60 of 77

Table 11-21
LTE Band 12 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)	(W/kg)			
707.50	23095	Md	LTE Band 12	10	24.0	23.49	-0.01	0	04106	QPSK	1	25	10 mm	back	1:1	0.386	1.125	0.434	A33
707.50	23095	Md	LTE Band 12	10	23.0	22.34	-0.02	1	04106	QPSK	25	25	10 mm	back	1:1	0.298	1.164	0.347	
707.50	23095	Md	LTE Band 12	10	24.0	23.49	0.16	0	04106	QPSK	1	25	10 mm	front	1:1	0.226	1.125	0.254	
707.50	23095	Md	LTE Band 12	10	23.0	22.34	0.10	1	04106	QPSK	25	25	10 mm	front	1:1	0.170	1.164	0.198	
707.50	23095	Md	LTE Band 12	10	24.0	23.49	0.09	0	04106	QPSK	1	25	10 mm	bottom	1:1	0.040	1.125	0.045	
707.50	23095	Md	LTE Band 12	10	23.0	22.34	0.01	1	04106	QPSK	25	25	10 mm	bottom	1:1	0.029	1.164	0.034	
707.50	23095	Md	LTE Band 12	10	24.0	23.49	-0.11	0	04106	QPSK	1	25	10 mm	right	1:1	0.092	1.125	0.104	
707.50	23095	Md	LTE Band 12	10	23.0	22.34	0.00	1	04106	QPSK	25	25	10 mm	right	1:1	0.070	1.164	0.081	
707.50	23095	Md	LTE Band 12	10	24.0	23.49	0.12	0	04106	QPSK	1	25	10 mm	left	1:1	0.070	1.125	0.079	
707.50	23095	Md	LTE Band 12	10	23.0	22.34	-0.10	1	04106	QPSK	25	25	10 mm	left	1:1	0.048	1.164	0.056	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-22
LTE Band 26 (Cell) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)	(W/kg)			
831.50	26865	Md	LTE Band 26 (Cell)	15	24.5	24.45	-0.14	0	04106	QPSK	1	74	10 mm	back	1:1	0.484	1.012	0.490	A35
831.50	26865	Md	LTE Band 26 (Cell)	15	23.5	23.11	0.00	1	04106	QPSK	36	37	10 mm	back	1:1	0.378	1.094	0.414	
831.50	26865	Md	LTE Band 26 (Cell)	15	24.5	24.45	-0.03	0	04106	QPSK	1	74	10 mm	front	1:1	0.395	1.012	0.400	
831.50	26865	Md	LTE Band 26 (Cell)	15	23.5	23.11	-0.03	1	04106	QPSK	36	37	10 mm	front	1:1	0.315	1.094	0.345	
831.50	26865	Md	LTE Band 26 (Cell)	15	24.5	24.45	0.01	0	04106	QPSK	1	74	10 mm	bottom	1:1	0.065	1.012	0.066	
831.50	26865	Md	LTE Band 26 (Cell)	15	23.5	23.11	0.10	1	04106	QPSK	36	37	10 mm	bottom	1:1	0.046	1.094	0.050	
831.50	26865	Md	LTE Band 26 (Cell)	15	24.5	24.45	0.06	0	04106	QPSK	1	74	10 mm	right	1:1	0.359	1.012	0.363	
831.50	26865	Md	LTE Band 26 (Cell)	15	23.5	23.11	0.01	1	04106	QPSK	36	37	10 mm	right	1:1	0.299	1.094	0.327	
831.50	26865	Md	LTE Band 26 (Cell)	15	24.5	24.45	0.02	0	04106	QPSK	1	74	10 mm	left	1:1	0.358	1.012	0.362	
831.50	26865	Md	LTE Band 26 (Cell)	15	23.5	23.11	0.02	1	04106	QPSK	36	37	10 mm	left	1:1	0.304	1.094	0.333	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT						Reviewed by:	
Document S/N:	Test Dates:	DUT Type:			Quality Manager			Page 61 of 77	
0Y1609221585.A3L	09/22/16 - 10/13/16	Portable Handset							

Table 11-23
LTE Band 4 (AWS) Hotspot SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.														(W/kg)	(W/kg)		
1732.50	20175	Md	LTE Band 4 (AWS)	20	24.5	24.34	-0.04	0	04114	QPSK	1	50	10 mm	back	1:1	0.830	1.038	0.862
1732.50	20175	Md	LTE Band 4 (AWS)	20	23.5	22.99	-0.04	1	04114	QPSK	50	0	10 mm	back	1:1	0.621	1.125	0.699
1732.50	20175	Md	LTE Band 4 (AWS)	20	23.5	22.79	-0.05	1	04114	QPSK	100	0	10 mm	back	1:1	0.611	1.178	0.720
1732.50	20175	Md	LTE Band 4 (AWS)	20	24.5	24.34	0.12	0	04114	QPSK	1	50	10 mm	front	1:1	0.605	1.038	0.628
1732.50	20175	Md	LTE Band 4 (AWS)	20	23.5	22.99	0.10	1	04114	QPSK	50	0	10 mm	front	1:1	0.440	1.125	0.495
1732.50	20175	Md	LTE Band 4 (AWS)	20	24.5	24.34	-0.03	0	04114	QPSK	1	50	10 mm	bottom	1:1	0.224	1.038	0.233
1732.50	20175	Md	LTE Band 4 (AWS)	20	23.5	22.99	0.03	1	04114	QPSK	50	0	10 mm	bottom	1:1	0.163	1.125	0.183
1732.50	20175	Md	LTE Band 4 (AWS)	20	24.5	24.34	-0.10	0	04114	QPSK	1	50	10 mm	right	1:1	0.045	1.038	0.047
1732.50	20175	Md	LTE Band 4 (AWS)	20	23.5	22.99	0.02	1	04114	QPSK	50	0	10 mm	right	1:1	0.032	1.125	0.036
1732.50	20175	Md	LTE Band 4 (AWS)	20	24.5	24.34	-0.05	0	04114	QPSK	1	50	10 mm	left	1:1	0.363	1.038	0.377
1732.50	20175	Md	LTE Band 4 (AWS)	20	23.5	22.99	0.02	1	04114	QPSK	50	0	10 mm	left	1:1	0.270	1.125	0.304
1732.50	20175	Md	LTE Band 4 (AWS)	20	24.5	24.34	0.06	0	04114	QPSK	1	50	10 mm	back	1:1	0.904	1.038	0.938
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body 1.6 W/kg (mW/g) averaged over 1 gram								
Spatial Peak																		
Uncontrolled Exposure/General Population																		

Blue entry represents variability measurement

Table 11-24
LTE Band 25 (PCS) Hotspot SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.														(W/kg)	(W/kg)		
1882.50	26365	Md	LTE Band 25 (PCS)	20	22.5	22.50	-0.17	0	04155	QPSK	1	50	10 mm	back	1:1	0.317	1.000	0.317
1905.00	26590	High	LTE Band 25 (PCS)	20	21.5	21.28	-0.07	1	04155	QPSK	50	25	10 mm	back	1:1	0.246	1.052	0.259
1882.50	26365	Md	LTE Band 25 (PCS)	20	22.5	22.50	-0.11	0	04155	QPSK	1	50	10 mm	front	1:1	0.405	1.000	0.405
1905.00	26590	High	LTE Band 25 (PCS)	20	21.5	21.28	0.03	1	04155	QPSK	50	25	10 mm	front	1:1	0.320	1.052	0.337
1882.50	26365	Md	LTE Band 25 (PCS)	20	22.5	22.50	-0.11	0	04155	QPSK	1	50	10 mm	bottom	1:1	0.330	1.000	0.330
1905.00	26590	High	LTE Band 25 (PCS)	20	21.5	21.28	0.05	1	04155	QPSK	50	25	10 mm	bottom	1:1	0.283	1.052	0.298
1882.50	26365	Md	LTE Band 25 (PCS)	20	22.5	22.50	0.09	0	04155	QPSK	1	50	10 mm	right	1:1	0.045	1.000	0.045
1905.00	26590	High	LTE Band 25 (PCS)	20	21.5	21.28	0.03	1	04155	QPSK	50	25	10 mm	right	1:1	0.035	1.052	0.037
1882.50	26365	Md	LTE Band 25 (PCS)	20	22.5	22.50	0.14	0	04155	QPSK	1	50	10 mm	left	1:1	0.212	1.000	0.212
1905.00	26590	High	LTE Band 25 (PCS)	20	21.5	21.28	0.02	1	04155	QPSK	50	25	10 mm	left	1:1	0.162	1.052	0.170
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body 1.6 W/kg (mW/g) averaged over 1 gram								
Spatial Peak																		
Uncontrolled Exposure/General Population																		

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 62 of 77

Table 11-25
LTE Band 41 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
2680.00	41490	High	LTE Band 41	20	22.5	22.23	0.11	0	04155	QPSK	1	50	10 mm	back	1:1.58	0.526	1.064	0.560	A41
2680.00	41490	High	LTE Band 41	20	21.5	21.20	-0.06	1	04155	QPSK	50	0	10 mm	back	1:1.58	0.438	1.072	0.470	
2680.00	41490	High	LTE Band 41	20	22.5	22.23	0.10	0	04155	QPSK	1	50	10 mm	front	1:1.58	0.378	1.064	0.402	
2680.00	41490	High	LTE Band 41	20	21.5	21.20	-0.08	1	04155	QPSK	50	0	10 mm	front	1:1.58	0.307	1.072	0.329	
2680.00	41490	High	LTE Band 41	20	22.5	22.23	-0.08	0	04155	QPSK	1	50	10 mm	bottom	1:1.58	0.199	1.064	0.212	
2680.00	41490	High	LTE Band 41	20	21.5	21.20	0.01	1	04155	QPSK	50	0	10 mm	bottom	1:1.58	0.164	1.072	0.176	
2680.00	41490	High	LTE Band 41	20	22.5	22.23	-0.11	0	04155	QPSK	1	50	10 mm	right	1:1.58	0.097	1.064	0.103	
2680.00	41490	High	LTE Band 41	20	21.5	21.20	-0.04	1	04155	QPSK	50	0	10 mm	right	1:1.58	0.077	1.072	0.083	
2680.00	41490	High	LTE Band 41	20	22.5	22.23	-0.05	0	04155	QPSK	1	50	10 mm	left	1:1.58	0.196	1.064	0.209	
2680.00	41490	High	LTE Band 41	20	21.5	21.20	-0.06	1	04155	QPSK	50	0	10 mm	left	1:1.58	0.160	1.072	0.172	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

Table 11-26
WLAN Hotspot SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																	
2462	11	802.11b	DSSS	22	17.5	17.38	0.00	10 mm	03892	1	back	99.0	0.374	0.286	1.028	1.010	0.297	A43
2462	11	802.11b	DSSS	22	17.5	17.38	0.08	10 mm	03892	1	front	99.0	0.228	-	1.028	1.010	-	
2462	11	802.11b	DSSS	22	17.5	17.38	0.07	10 mm	03892	1	top	99.0	0.252	-	1.028	1.010	-	
2462	11	802.11b	DSSS	22	17.5	17.38	0.05	10 mm	03892	1	left	99.0	0.081	-	1.028	1.010	-	
5785	157	802.11a	OFDM	20	13.5	12.99	0.19	10 mm	03892	6	back	98.7	0.239	-	1.125	1.013	-	
5785	157	802.11a	OFDM	20	13.5	12.99	0.09	10 mm	03892	6	front	98.7	0.553	0.254	1.125	1.013	0.289	A45
5785	157	802.11a	OFDM	20	13.5	12.99	-0.12	10 mm	03892	6	top	98.7	0.451	-	1.125	1.013	-	
5785	157	802.11a	OFDM	20	13.5	12.99	0.14	10 mm	03892	6	left	98.7	0.063	-	1.125	1.013	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body										
Spatial Peak								1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population								averaged over 1 gram										

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 63 of 77

11.4 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
10. This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.2. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.

GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset			Page 64 of 77

CDMA Notes:

1. Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v03r01.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO Rev0 and RevA and TDSO / SO32 FCH+SCH SAR tests were not required per the 3G SAR Test Reduction Procedure in FCC KDB Publication 941225 D01v03r01.
3. CDMA Wireless Router SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01v03r01 procedures for data devices. Wireless Router SAR tests for Subtype 2 of Rev.A and 1x RTT configurations were not required per the 3G SAR Test Reduction Policy in KDB Publication 941225 D01v03r01.
4. Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
5. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.6.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported (scaled) for LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.

FCC ID: A3LSMJ327P	 PCTEST Engineering Laboratory, Inc.	SAR EVALUATION REPORT	
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset	Reviewed by: Quality Manager Page 65 of 77

WLAN Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.7.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg. See Section 8.7.6 for more information.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

FCC ID: A3LSMJ327P	 SAR EVALUATION REPORT	 Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 12-1
Estimated SAR

Mode	Frequency	Maximum	Separation	Estimated
		Allowed Power	Distance (Body)	
	[MHz]	[dBm]	[mm]	[W/kg]
Bluetooth	2480	11.50	15	0.196

Note: Held-to ear configurations are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

FCC ID: A3LSMJ327P	 PCTEST	SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset			Page 67 of 77

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	CDMA/EVDO BC0 (\$90S)	0.367	0.613	0.980
	CDMA/EVDO BC0 (\$22H)	0.380	0.613	0.993
	PCS CDMA/EVDO	0.318	0.613	0.931
	GSM 850	0.248	0.613	0.861
	GSM 1900	0.125	0.613	0.738
	UMTS 850	0.285	0.613	0.898
	UMTS 1750	0.489	0.613	1.102
	UMTS 1900	0.199	0.613	0.812
	LTE Band 12	0.236	0.613	0.849
	LTE Band 26 (Cell)	0.306	0.613	0.919
	LTE Band 4 (AWS)	0.388	0.613	1.001
	LTE Band 25 (PCS)	0.254	0.613	0.867
	LTE Band 41	0.263	0.613	0.876

Table 12-3
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	CDMA/EVDO BC10 (\$90S)	0.367	0.594	0.961
	CDMA/EVDO BC0 (\$22H)	0.380	0.594	0.974
	PCS CDMA/EVDO	0.318	0.594	0.912
	GSM 850	0.248	0.594	0.842
	GSM 1900	0.125	0.594	0.719
	UMTS 850	0.285	0.594	0.879
	UMTS 1750	0.489	0.594	1.083
	UMTS 1900	0.199	0.594	0.793
	LTE Band 12	0.236	0.594	0.830
	LTE Band 26 (Cell)	0.306	0.594	0.900
	LTE Band 4 (AWS)	0.388	0.594	0.982
	LTE Band 25 (PCS)	0.254	0.594	0.848
	LTE Band 41	0.263	0.594	0.857

FCC ID: A3LSMJ327P	 SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset	Page 68 of 77

12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-4
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body-Worn	CDMA BC10 (\$90S)	0.479	0.139	0.618
	CDMA BC0 (\$22H)	0.465	0.139	0.604
	PCS CDMA	0.407	0.139	0.546
	GSM 850	0.325	0.139	0.464
	GSM 1900	0.197	0.139	0.336
	UMTS 850	0.364	0.139	0.503
	UMTS 1750	0.492	0.139	0.631
	UMTS 1900	0.368	0.139	0.507
	LTE Band 12	0.343	0.139	0.482
	LTE Band 26 (Cell)	0.456	0.139	0.595
	LTE Band 4 (AWS)	0.525	0.139	0.664
	LTE Band 25 (PCS)	0.354	0.139	0.493
	LTE Band 41	0.413	0.139	0.552

Table 12-5
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body-Worn	CDMA BC10 (\$90S)	0.479	0.106	0.585
	CDMA BC0 (\$22H)	0.465	0.106	0.571
	PCS CDMA	0.407	0.106	0.513
	GSM 850	0.325	0.106	0.431
	GSM 1900	0.197	0.106	0.303
	UMTS 850	0.364	0.106	0.470
	UMTS 1750	0.492	0.106	0.598
	UMTS 1900	0.368	0.106	0.474
	LTE Band 12	0.343	0.106	0.449
	LTE Band 26 (Cell)	0.456	0.106	0.562
	LTE Band 4 (AWS)	0.525	0.106	0.631
	LTE Band 25 (PCS)	0.354	0.106	0.460
	LTE Band 41	0.413	0.106	0.519

FCC ID: A3LSMJ327P	 SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset	Page 69 of 77

Table 12-6
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Body-Worn	CDMA BC10 (\$90S)	0.479	0.196	0.675
	CDMA BCO (\$22H)	0.465	0.196	0.661
	PCS CDMA	0.407	0.196	0.603
	GSM 850	0.325	0.196	0.521
	GSM 1900	0.197	0.196	0.393
	UMTS 850	0.364	0.196	0.560
	UMTS 1750	0.492	0.196	0.688
	UMTS 1900	0.368	0.196	0.564
	LTE Band 12	0.343	0.196	0.539
	LTE Band 26 (Cell)	0.456	0.196	0.652
	LTE Band 4 (AWS)	0.525	0.196	0.721
	LTE Band 25 (PCS)	0.354	0.196	0.550
	LTE Band 41	0.413	0.196	0.609

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

12.5 Hotspot SAR Simultaneous Transmission Analysis

Table 12-7
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Hotspot SAR	EVDO BC10 (\$90S)	0.498	0.297	0.795
	EVDO BCO (\$22H)	0.513	0.297	0.810
	PCS EVDO	0.518	0.297	0.815
	GPRS 850	0.308	0.297	0.605
	GPRS 1900	0.377	0.297	0.674
	UMTS 850	0.403	0.297	0.700
	UMTS 1750	0.832	0.297	1.129
	UMTS 1900	0.344	0.297	0.641
	LTE Band 12	0.434	0.297	0.731
	LTE Band 26 (Cell)	0.490	0.297	0.787
	LTE Band 4 (AWS)	0.938	0.297	1.235
	LTE Band 25 (PCS)	0.405	0.297	0.702
	LTE Band 41	0.560	0.297	0.857

FCC ID: A3LSMJ327P	 PCTEST Engineering Laboratory, Inc.	SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 70 of 77	

Table 12-8
Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Hotspot SAR	EVDO BC10 (\$90S)	0.498	0.289	0.787
	EVDO BC0 (\$22H)	0.513	0.289	0.802
	PCS EVDO	0.518	0.289	0.807
	GPRS 850	0.308	0.289	0.597
	GPRS 1900	0.377	0.289	0.666
	UMTS 850	0.403	0.289	0.692
	UMTS 1750	0.832	0.289	1.121
	UMTS 1900	0.344	0.289	0.633
	LTE Band 12	0.434	0.289	0.723
	LTE Band 26 (Cell)	0.490	0.289	0.779
	LTE Band 4 (AWS)	0.938	0.289	1.227
	LTE Band 25 (PCS)	0.405	0.289	0.694
	LTE Band 41	0.560	0.289	0.849

12.6 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID: A3LSMJ327P	 SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset	Page 71 of 77

13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 13-1
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1750	1732.50	20175	LTE Band 4 (AWS), 20 MHz Bandwidth	QPSK, 1 RB, 50 RB Offset	back	10 mm	0.830	0.904	1.09	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram						

13.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 72 of 77

14 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Gigatronics	80701A	(0.05-18GHz) Power Sensor	11/4/2015	Annual	11/4/2016	1833460
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/2/2016	Annual	3/2/2017	MY45470194
Agilent	8753E	(30kHz-6GHz) Network Analyzer	3/2/2016	Annual	3/2/2017	JP38020182
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
SPEAG	D750V3	750 MHz SAR Dipole	3/16/2016	Annual	3/16/2017	1054
SPEAG	D750V3	750 MHz SAR Dipole	7/13/2016	Annual	7/13/2017	1161
SPEAG	D835V2	835 MHz SAR Dipole	1/20/2016	Annual	1/20/2017	4d132
SPEAG	D835V2	835 MHz SAR Dipole	7/14/2016	Annual	7/14/2017	4d133
SPEAG	D1750V2	1750 MHz SAR Dipole	5/9/2016	Annual	5/9/2017	1148
SPEAG	D1765V2	1765 MHz SAR Dipole	5/11/2016	Annual	5/11/2017	1008
SPEAG	D1900V2	1900 MHz SAR Dipole	2/19/2016	Annual	2/19/2017	5d148
SPEAG	D1900V2	1900 MHz SAR Dipole	7/8/2016	Annual	7/8/2017	5d080
SPEAG	D2450V2	2450 MHz SAR Dipole	7/25/2016	Annual	7/25/2017	981
SPEAG	D2600V2	2600 MHz SAR Dipole	7/25/2016	Annual	7/25/2017	1126
SPEAG	D5GHzV2	5 GHz SAR Dipole	8/2/2016	Annual	8/2/2017	1237
SPEAG	ES3DV2	SAR Probe	7/19/2016	Annual	7/19/2017	3022
SPEAG	ES3DV3	SAR Probe	2/19/2016	Annual	2/19/2017	3213
SPEAG	EX3DV4	SAR Probe	2/22/2016	Annual	2/22/2017	3914
SPEAG	ES3DV3	SAR Probe	2/19/2016	Annual	2/19/2017	3318
SPEAG	ES3DV3	SAR Probe	3/18/2016	Annual	3/18/2017	3319
SPEAG	ES3DV3	SAR Probe	11/17/2015	Annual	11/17/2016	3334
SPEAG	EX3DV4	SAR Probe	4/19/2016	Annual	4/19/2017	7406
SPEAG	EX3DV4	SAR Probe	5/17/2016	Annual	5/17/2017	7409
SPEAG	EX3DV4	SAR Probe	7/25/2016	Annual	7/25/2017	7410
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/19/2016	Annual	2/19/2017	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/11/2016	Annual	5/11/2017	859
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/18/2016	Annual	2/18/2017	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/12/2016	Annual	7/12/2017	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/14/2016	Annual	3/14/2017	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/11/2015	Annual	11/11/2016	1415
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/14/2016	Annual	4/14/2017	1407
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/15/2016	Annual	1/15/2017	1466
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/10/2016	Annual	5/10/2017	1070
Mitutoyo	CD-6"CSX	Digital Caliper	3/2/2016	Biennial	3/2/2018	13264165
Control Company	4040	Digital Thermometer	3/15/2015	Biennial	3/15/2017	150194929
Control Company	4040	Digital Thermometer	3/18/2015	Biennial	3/18/2017	150194987
Agilent	E4438C	ESG Vector Signal Generator	3/13/2015	Biennial	3/13/2017	MY42082385
Agilent	E4438C	ESG Vector Signal Generator	3/2/2016	Annual	3/2/2017	MY42720002
Control Company	4353	Long Stem Thermometer	1/22/2015	Biennial	1/22/2017	150053081
Control Company	4353	Long Stem Thermometer	1/22/2015	Biennial	1/22/2017	150053059
Agilent	N5182A	MXG Vector Signal Generator	3/5/2016	Annual	3/5/2017	MY47420800
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	1039008
Anritsu	MA2411B	Pulse Power Sensor	12/7/2015	Annual	12/7/2016	1207364
Anritsu	MA2411B	Pulse Power Sensor	8/18/2016	Annual	8/18/2017	1126066
Anritsu	MT8820C	Radio Communication Analyzer	4/14/2016	Annual	4/14/2017	6201240328
Rohde & Schwarz	CMW500	Radio Communication Tester	4/13/2016	Annual	4/13/2017	140148
Rohde & Schwarz	CMW500	Radio Communication tester	5/27/2016	Annual	5/27/2017	140144
Agilent	8753ES	S-Parameter Network Analyzer	6/28/2016	Annual	6/28/2017	MY40000670
Seekonk	NC-100	Torque Wrench	11/6/2015	Biennial	11/6/2017	22313
Control Company	4352	Ultra Long Stem Thermometer	3/8/2016	Biennial	3/8/2018	160261728
Anritsu	MA24106A	USB Power Sensor	6/2/2016	Annual	6/2/2017	1231538
Anritsu	MA24106A	USB Power Sensor	6/2/2016	Annual	6/2/2017	1231535
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	7/20/2016	Annual	7/20/2017	132885
Agilent	E5515C	Wireless Communications Test Set	12/24/2014	Biennial	12/24/2016	GB44400860
Agilent	E5515C	Wireless Communications Test Set	5/22/2015	Biennial	5/22/2017	GB43304278
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433972
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-53W2	Attenuator (3dB)	CBT	N/A	CBT	120
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
COMTech	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: A3LSMJ327P	PCTEST SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N:	Test Dates:	DUT Type:	Page 73 of 77
0Y1609221585.A3L	09/22/16 - 10/13/16	Portable Handset	

15 MEASUREMENT UNCERTAINTIES

a	c	d	e = f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemispherical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS					11.5	11.3	60
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2					23.0	22.6	

FCC ID: A3LSMJ327P	 SAR EVALUATION REPORT	 Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset

16 CONCLUSION

16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMJ327P	 PCTEST Engineering Laboratory, Inc.	SAR EVALUATION REPORT			Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset			Page 75 of 77

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: A3LSMJ327P		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset		Page 76 of 77

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D06
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMJ327P	 SAR EVALUATION REPORT		 Reviewed by: Quality Manager
Document S/N: 0Y1609221585.A3L	Test Dates: 09/22/16 - 10/13/16	DUT Type: Portable Handset	Page 77 of 77

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04122

Communication System: UID 0, Cellular CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 820.1$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 41.02$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 09-26-2016; Ambient Temp: 24.2°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7410; ConvF(9.68, 9.68, 9.68); Calibrated: 7/25/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/12/2016

Phantom: Sub TWIN SAM; Type: QD000P40CC; Serial: TP-1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Cell. CDMA, Rule Part 90S, Right Head, Cheek, Mid.ch


Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.85 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.343 W/kg

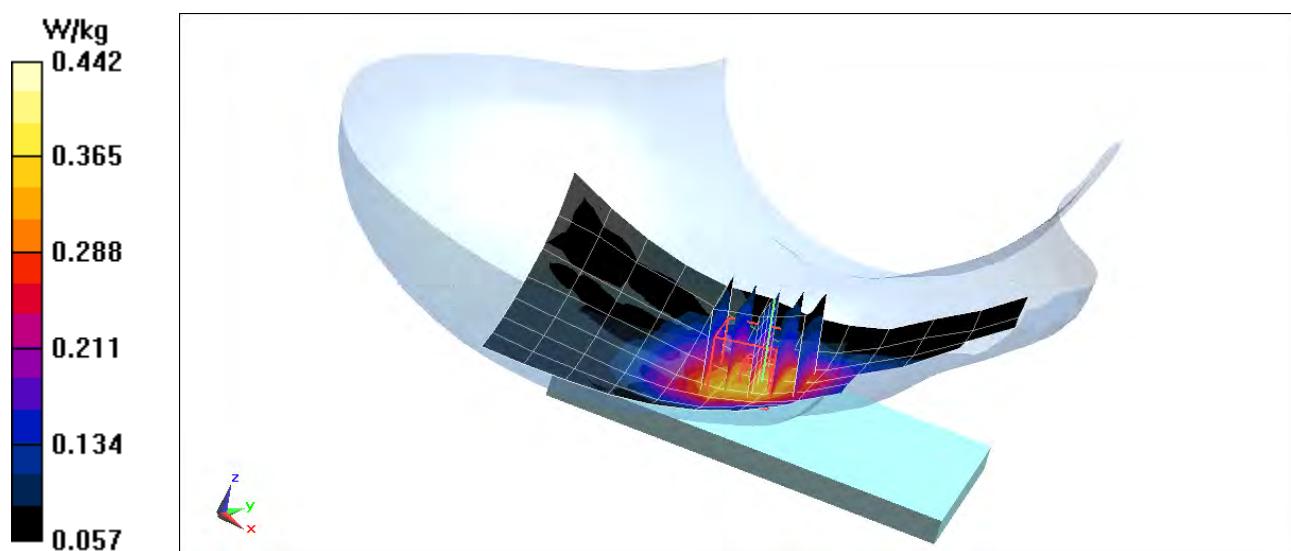

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04122

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.52$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 40.851$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 09-26-2016; Ambient Temp: 24.2°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7410; ConvF(9.68, 9.68, 9.68); Calibrated: 7/25/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/12/2016

Phantom: Sub TWIN SAM; Type: QD000P40CC; Serial: TP-1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Cell. EVDO Rev. A, Rule Part 22H, Right Head, Cheek, Mid.ch


Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.32 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.345 W/kg

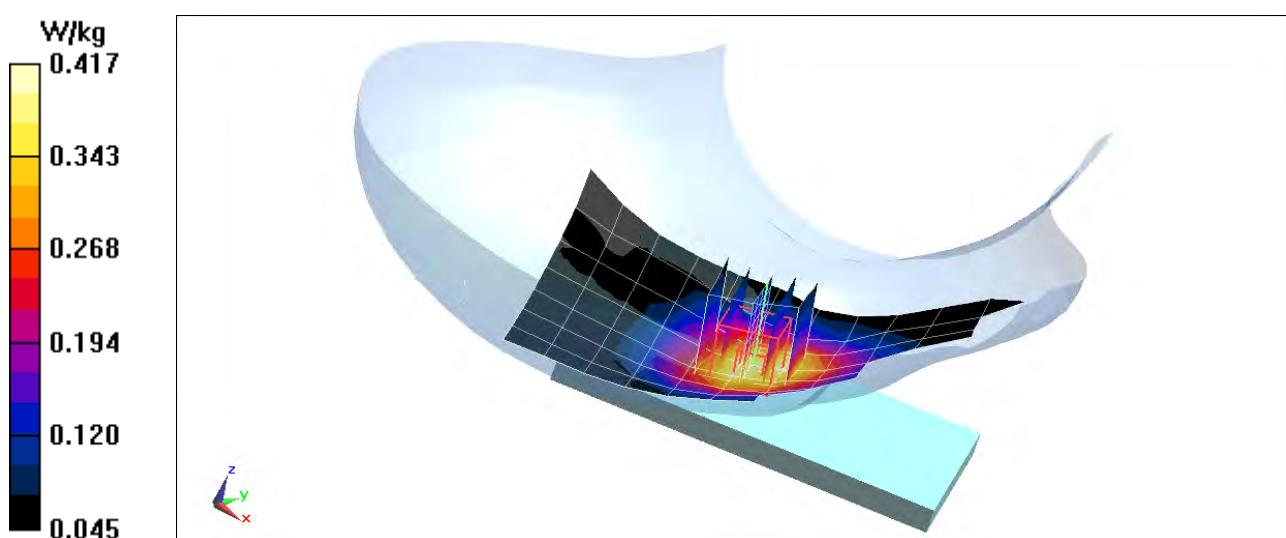

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04155

Communication System: UID 0, PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 39.836$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 09-27-2016; Ambient Temp: 23.7°C; Tissue Temp: 22.0°C

Probe: ES3DV2 - SN3022; ConvF(4.96, 4.96, 4.96); Calibrated: 7/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1466; Calibrated: 1/15/2016

Phantom: SAM Sub; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: PCS EVDO Rev. A, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.42 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.422 W/kg

SAR(1 g) = 0.274 W/kg

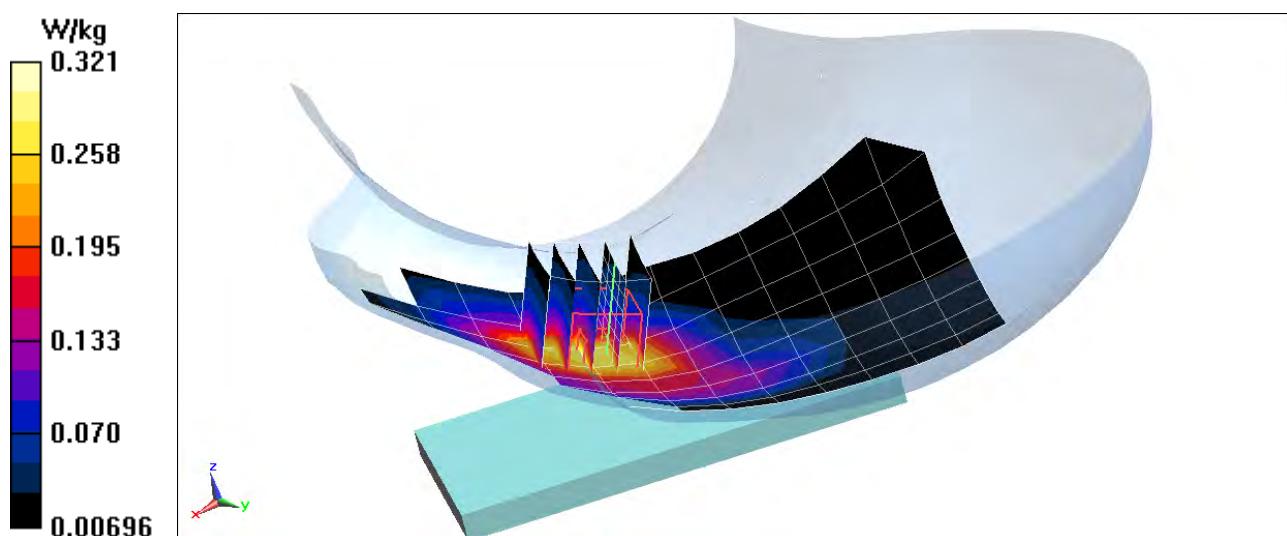

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04148

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 40.85$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 09-26-2016; Ambient Temp: 24.2°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7410; ConvF(9.68, 9.68, 9.68); Calibrated: 7/25/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/12/2016

Phantom: Sub TWIN SAM; Type: QD000P40CC; Serial: TP-1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 850, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.86 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.194 W/kg

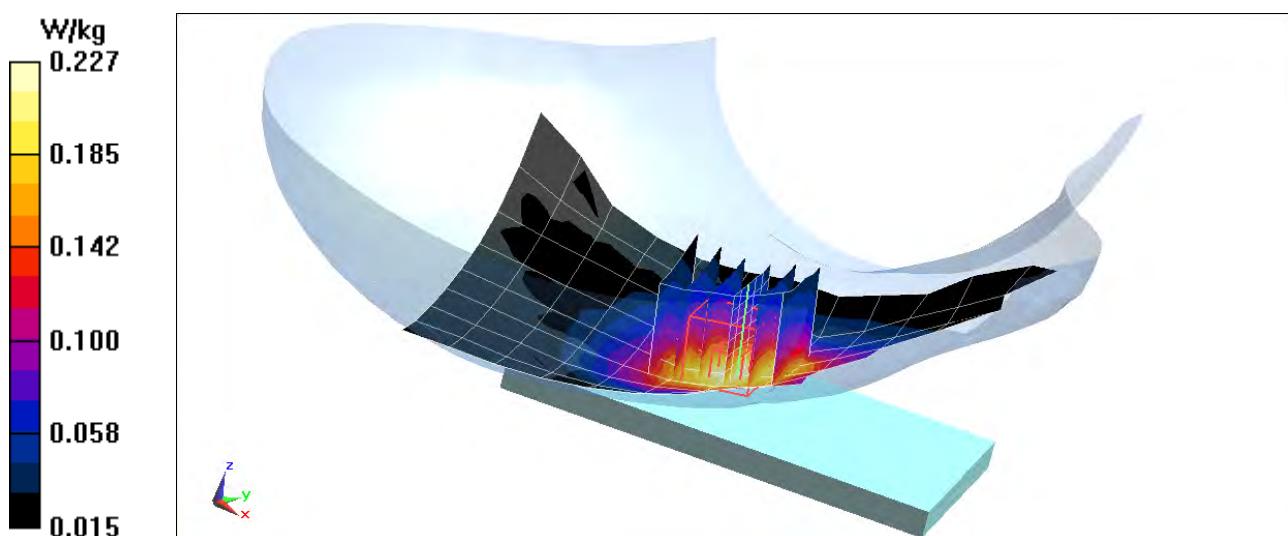

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04122

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Head Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 39.836$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 09-27-2016; Ambient Temp: 23.7°C; Tissue Temp: 22.0°C

Probe: ES3DV2 - SN3022; ConvF(4.96, 4.96, 4.96); Calibrated: 7/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1466; Calibrated: 1/15/2016

Phantom: SAM Sub; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 1900, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.964 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.103 W/kg

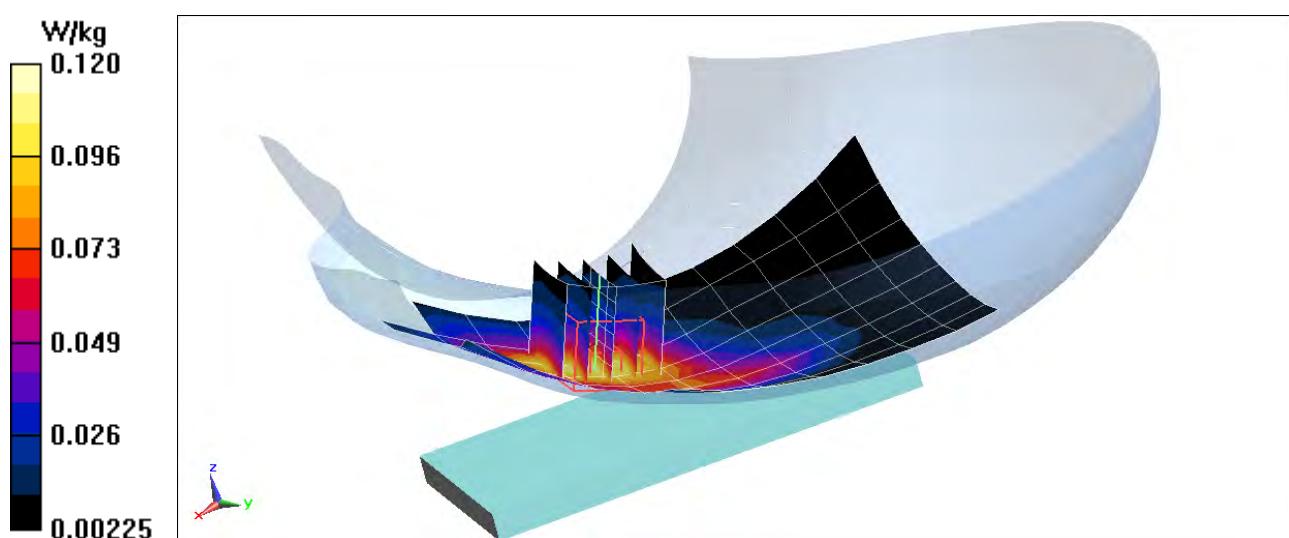

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04148

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 40.85$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 09-26-2016; Ambient Temp: 24.2°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7410; ConvF(9.68, 9.68, 9.68); Calibrated: 7/25/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/12/2016

Phantom: Sub TWIN SAM; Type: QD000P40CC; Serial: TP-1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Right Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.86 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.325 W/kg

SAR(1 g) = 0.259 W/kg

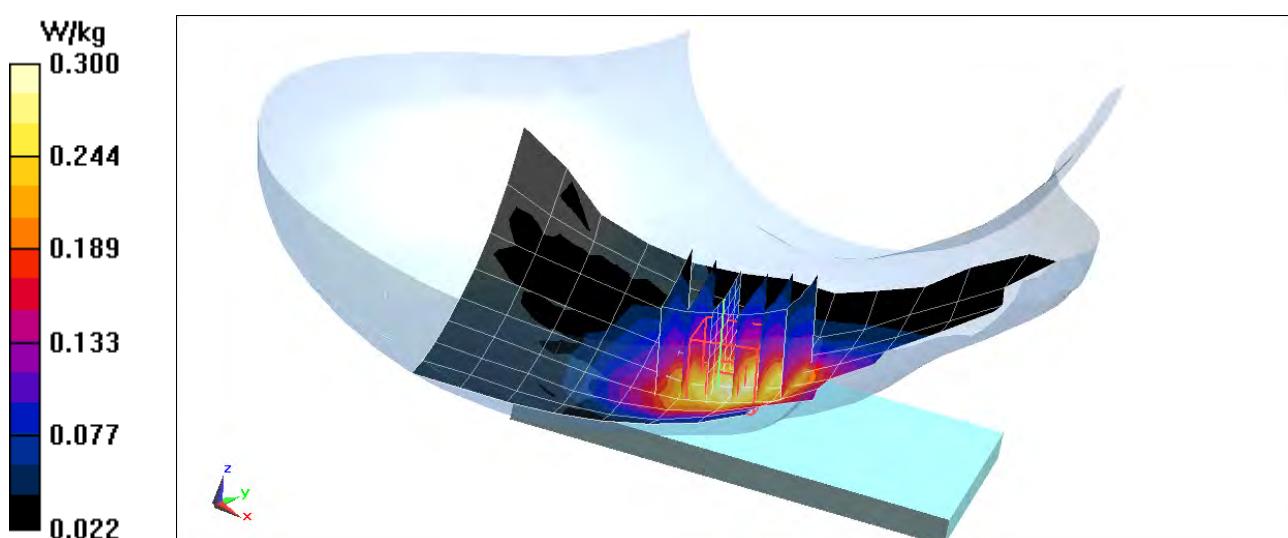

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 01664

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.4$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.616$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 10-06-2016; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3213; ConvF(5.23, 5.23, 5.23); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1750, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.10 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.692 W/kg

SAR(1 g) = 0.452 W/kg

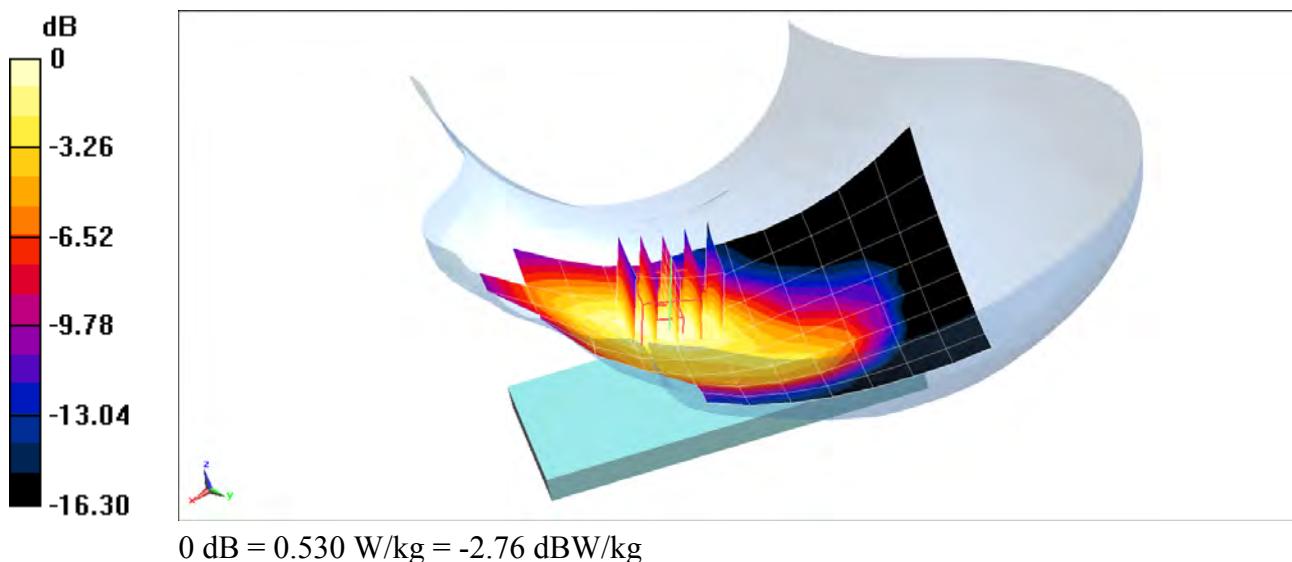

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04122

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 39.836$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 09-27-2016; Ambient Temp: 23.7°C; Tissue Temp: 22.0°C

Probe: ES3DV2 - SN3022; ConvF(4.96, 4.96, 4.96); Calibrated: 7/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1466; Calibrated: 1/15/2016

Phantom: SAM Sub; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.89 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.182 W/kg

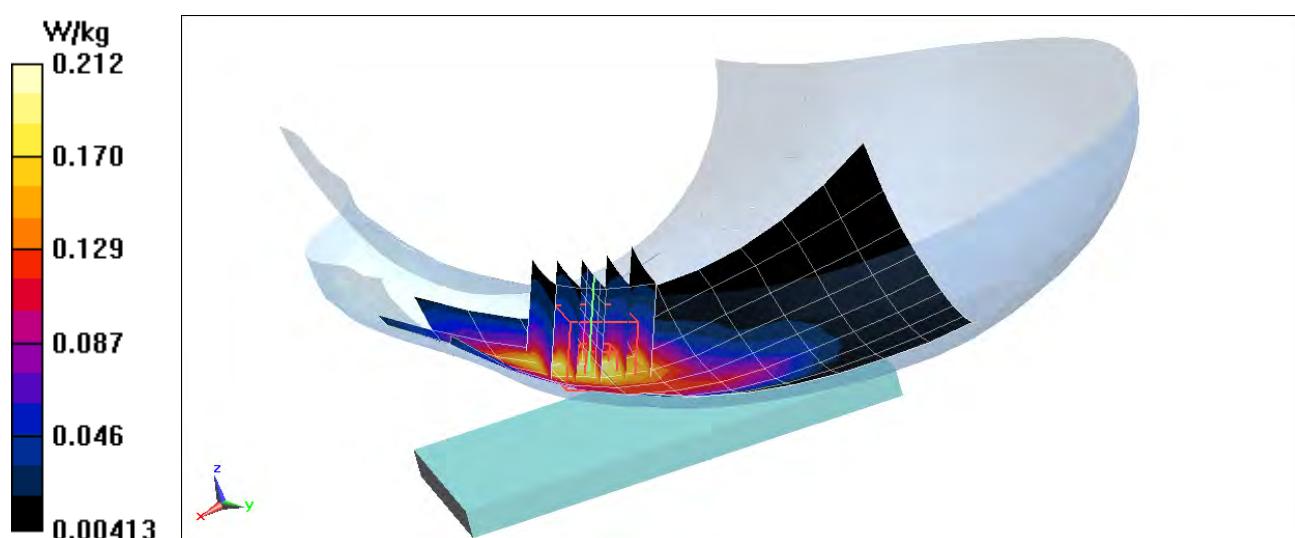

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04106

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 42.776$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 09-26-2016; Ambient Temp: 21.3°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3318; ConvF(6.48, 6.48, 6.48); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Right Head, Cheek, Mid.ch
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.84 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.210 W/kg

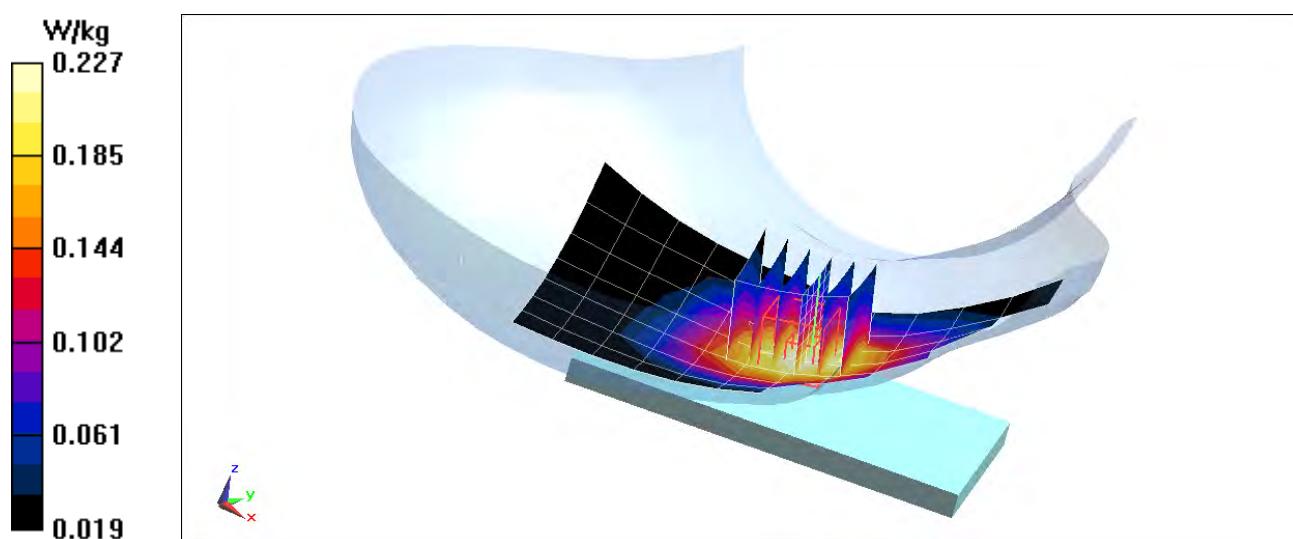

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04106

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 40.908$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 09-26-2016; Ambient Temp: 24.2°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7410; ConvF(9.68, 9.68, 9.68); Calibrated: 7/25/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/12/2016

Phantom: Sub TWIN SAM; Type: QD000P40CC; Serial: TP-1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 26 (Cell.), Right Head, Cheek, Mid.ch
15 MHz Bandwidth, QPSK, 1 RB, 74 RB Offset**


Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.11 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.302 W/kg

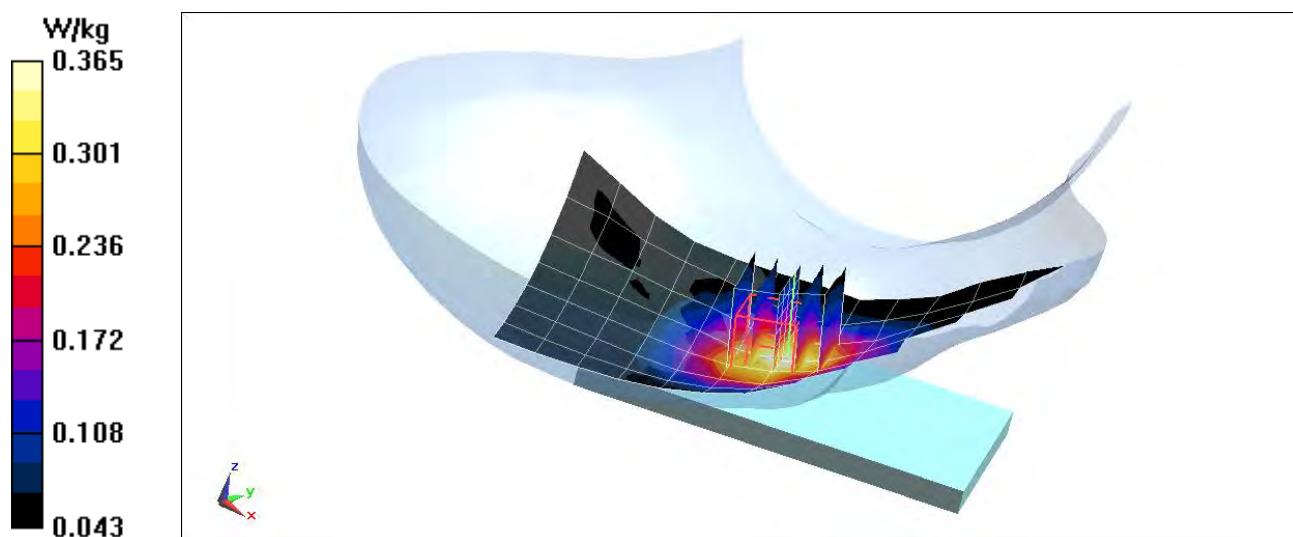

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04114

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.5$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 38.699$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 09-27-2016; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3213; ConvF(5.23, 5.23, 5.23); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Left; Type: QD000P40CD; Serial: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Left Head, Cheek, Mid.ch
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.41 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.374 W/kg

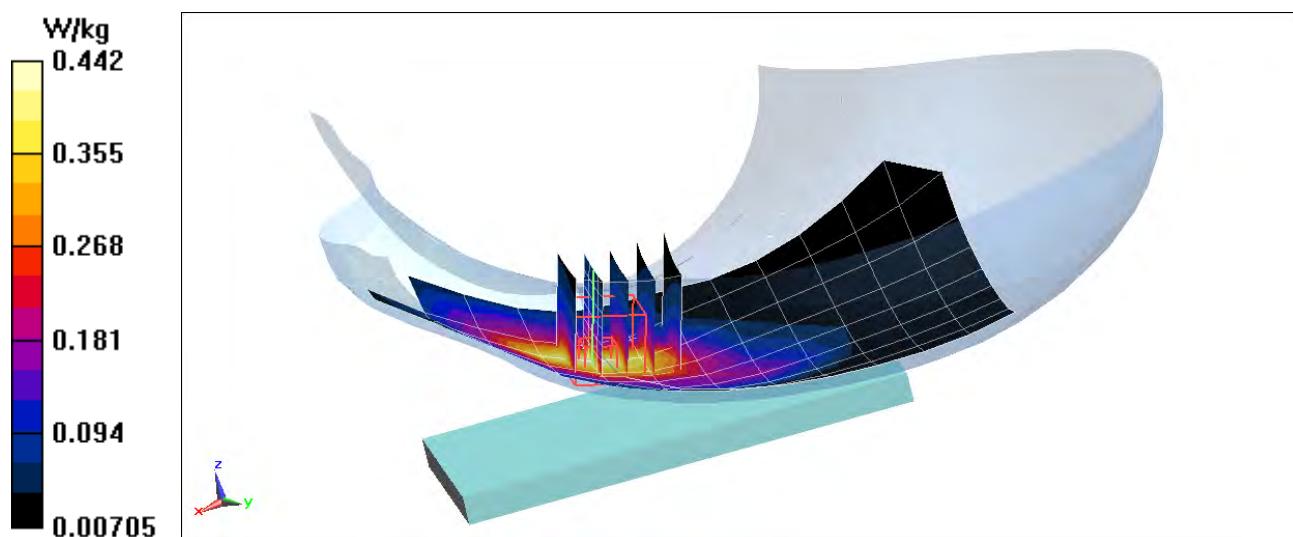

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04155

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1882.5$ MHz; $\sigma = 1.421$ S/m; $\epsilon_r = 39.826$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 09-27-2016; Ambient Temp: 23.7°C; Tissue Temp: 22.0°C

Probe: ES3DV2 - SN3022; ConvF(4.96, 4.96, 4.96); Calibrated: 7/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1466; Calibrated: 1/15/2016

Phantom: SAM Sub; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 25 (PCS), Left Head, Cheek, Mid.ch
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.01 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.393 W/kg

SAR(1 g) = 0.254 W/kg

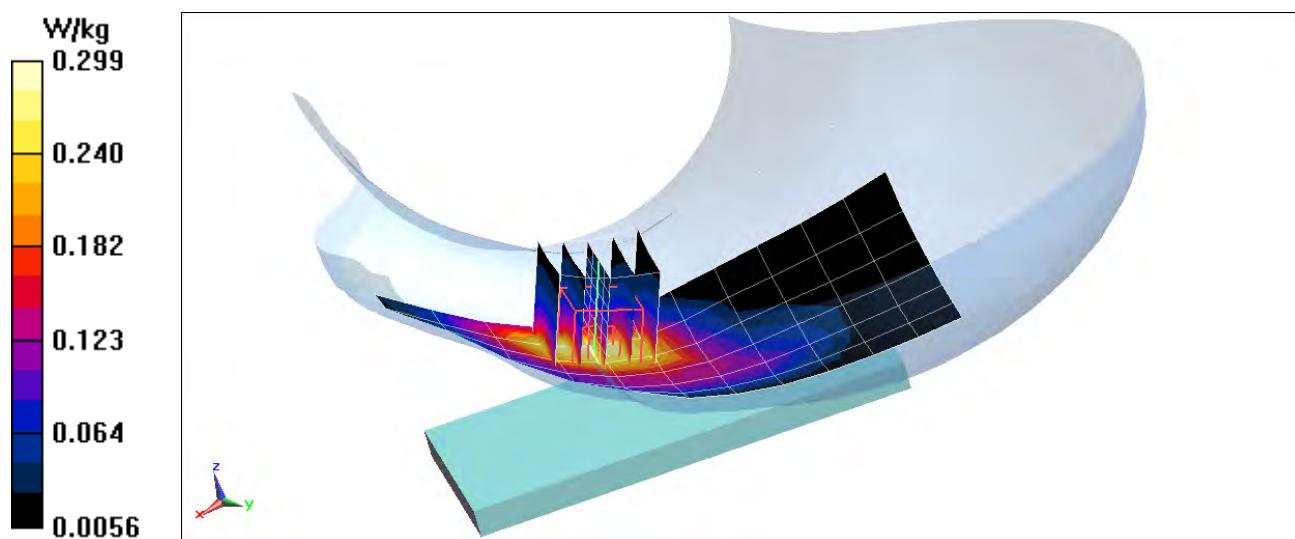

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04155

Communication System: UID 0, LTE Band 41; Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2600 Head Medium parameters used (interpolated):

$f = 2680$ MHz; $\sigma = 2.134$ S/m; $\epsilon_r = 37.277$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 09-27-2016; Ambient Temp: 22.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7409; ConvF(6.77, 6.77, 6.77); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 41, Left Head, Cheek, High.ch, QPSK,
20 MHz Bandwidth, 1 RB, 50 RB Offset**


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.15 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.247 W/kg

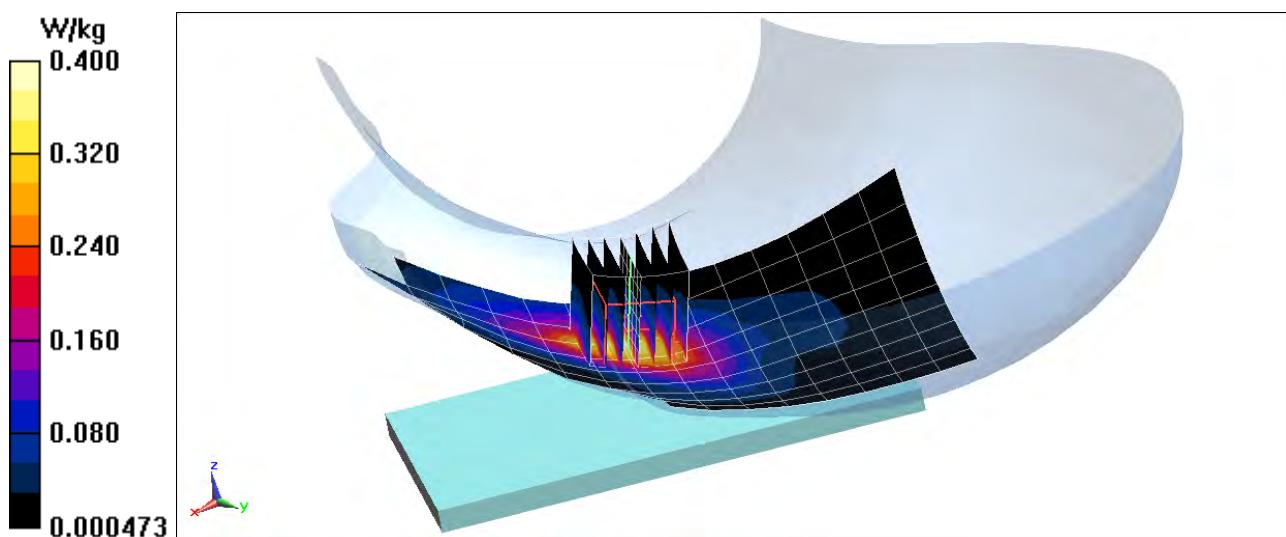

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 03892

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2462$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.432$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 09-22-2016; Ambient Temp: 22.9°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN7409; ConvF(6.9, 6.9, 6.9); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11b, 22 MHz Bandwidth
Right Head, Tilt, Ch 11, 1 Mbps**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.55 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.578 W/kg

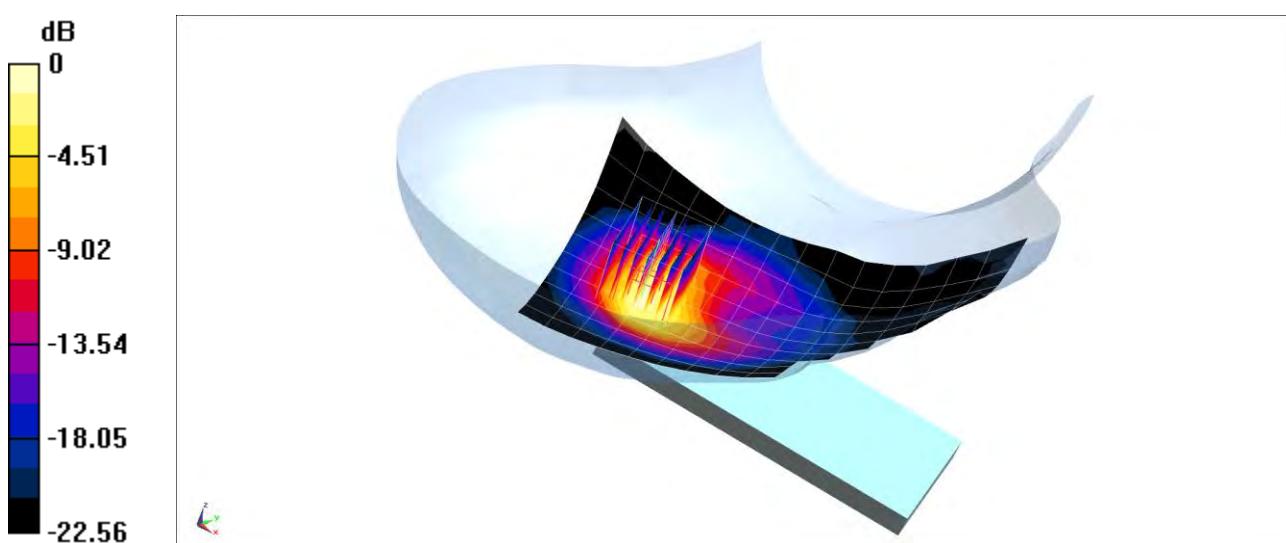

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 03892

Communication System: UID 0, IEEE 802.11n; Frequency: 5270 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used (interpolated):

$f = 5270$ MHz; $\sigma = 4.705$ S/m; $\epsilon_r = 35.459$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 09-26-2016; Ambient Temp: 21.3°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3914; ConvF(5.07, 5.07, 5.07); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11n, U-NII-2A, 40 MHz Bandwidth
Right Head, Tilt, Ch 54, 13.5 Mbps**


Area Scan (13x19x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 11.70 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 0.573 W/kg

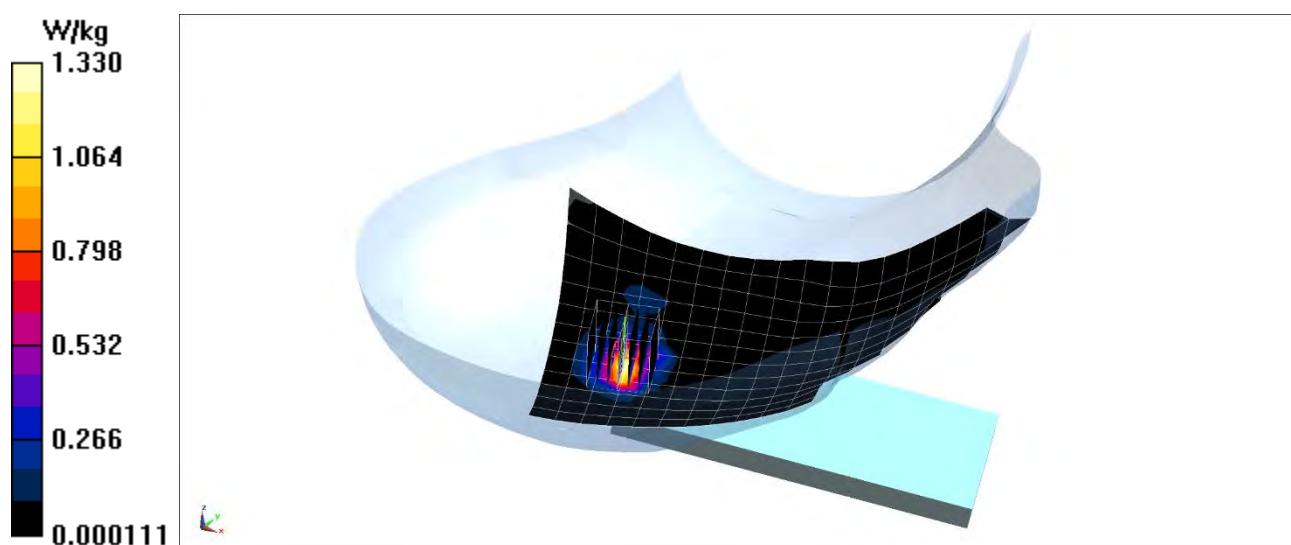

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04106

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 820.1$ MHz; $\sigma = 0.967$ S/m; $\epsilon_r = 54.187$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-28-2016; Ambient Temp: 22.6°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7406; ConvF(9.35, 9.35, 9.35); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Cell. CDMA, Rule Part 90S, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.15 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.568 W/kg

SAR(1 g) = 0.428 W/kg

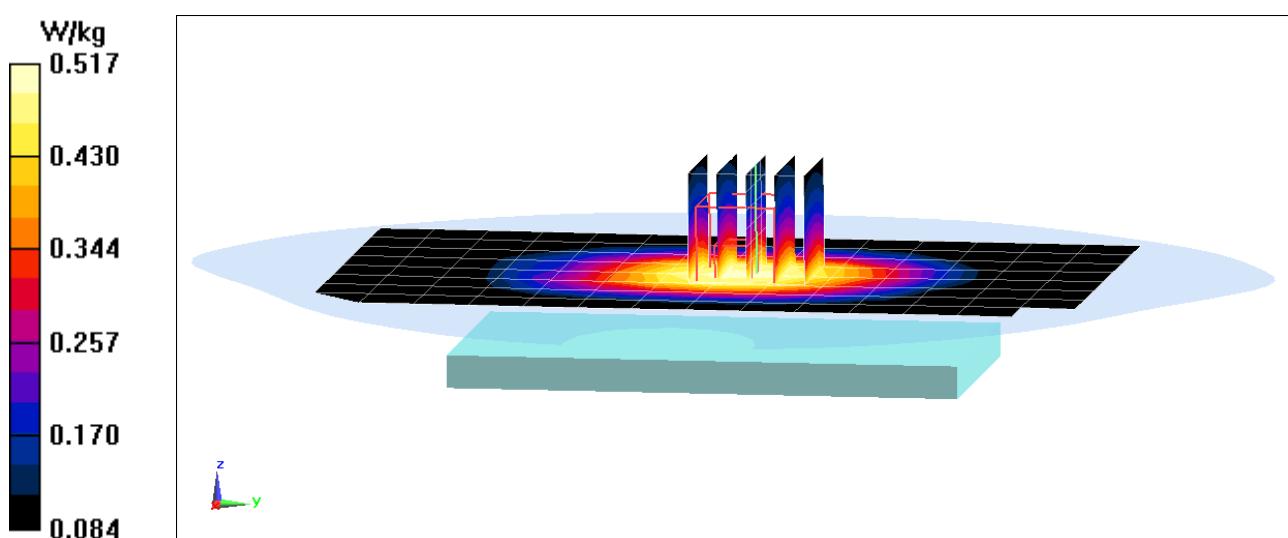

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04155

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 820.1$ MHz; $\sigma = 0.967$ S/m; $\epsilon_r = 54.187$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-28-2016; Ambient Temp: 22.6°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7406; ConvF(9.35, 9.35, 9.35); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Cell. EVDO Rev. 0, Rule Part 90S, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.10 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.461 W/kg

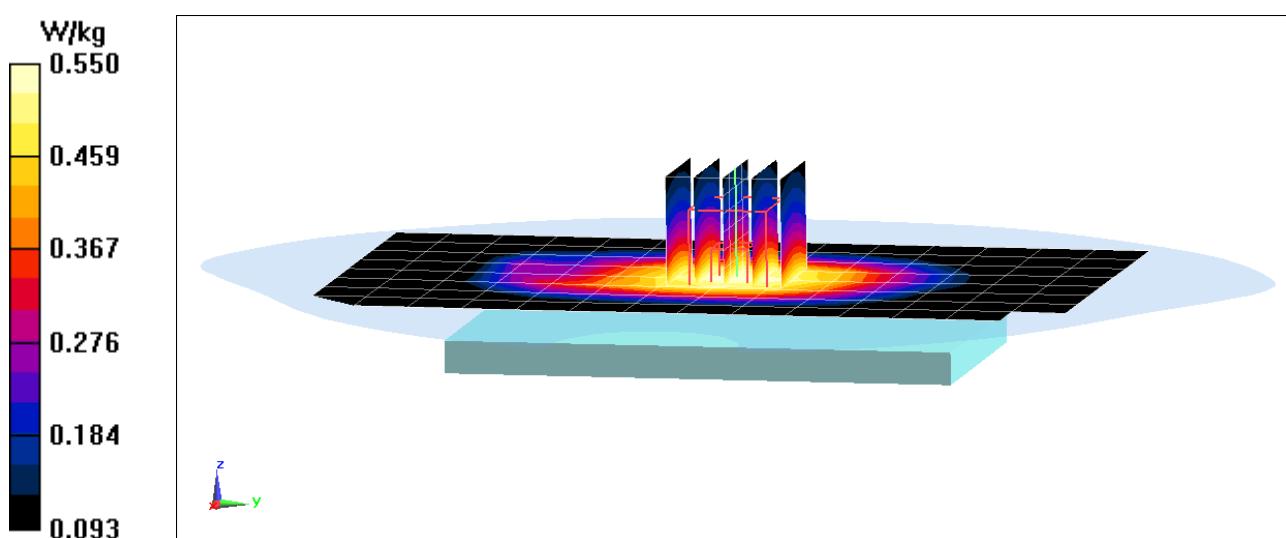

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04106

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.52$ MHz; $\sigma = 0.983$ S/m; $\epsilon_r = 54.011$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-28-2016; Ambient Temp: 22.6°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7406; ConvF(9.35, 9.35, 9.35); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Cell. CDMA, Rule Part 22H, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.81 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.550 W/kg

SAR(1 g) = 0.414 W/kg

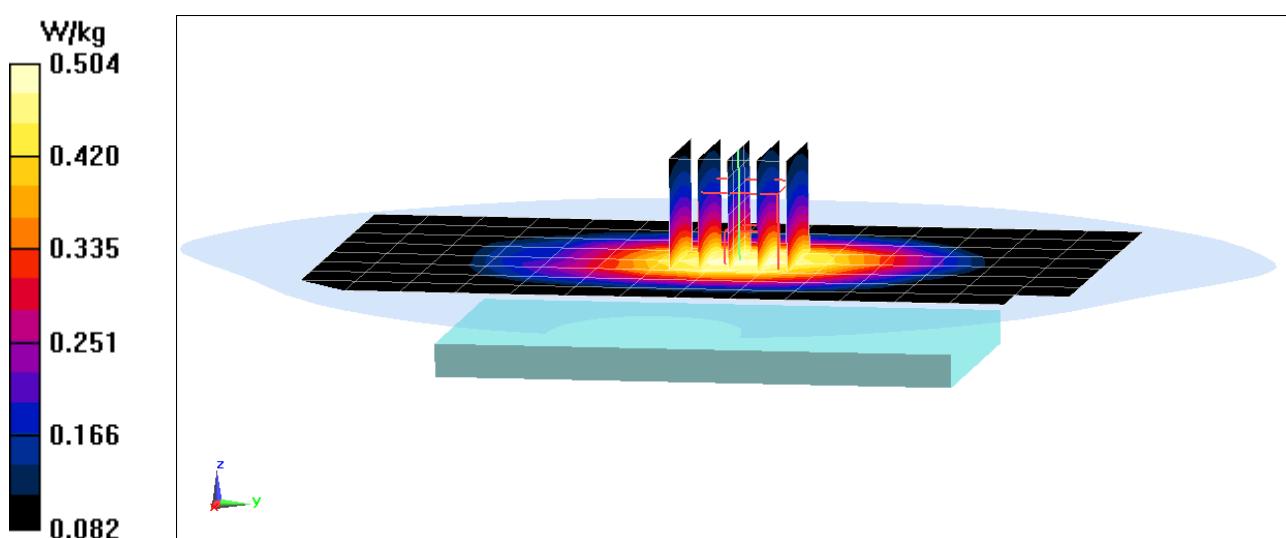

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04155

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.52$ MHz; $\sigma = 0.983$ S/m; $\epsilon_r = 54.011$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-28-2016; Ambient Temp: 22.6°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7406; ConvF(9.35, 9.35, 9.35); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: Cell. EVDO Rev. 0, Rule Part 22H, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.73 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.604 W/kg

SAR(1 g) = 0.457 W/kg

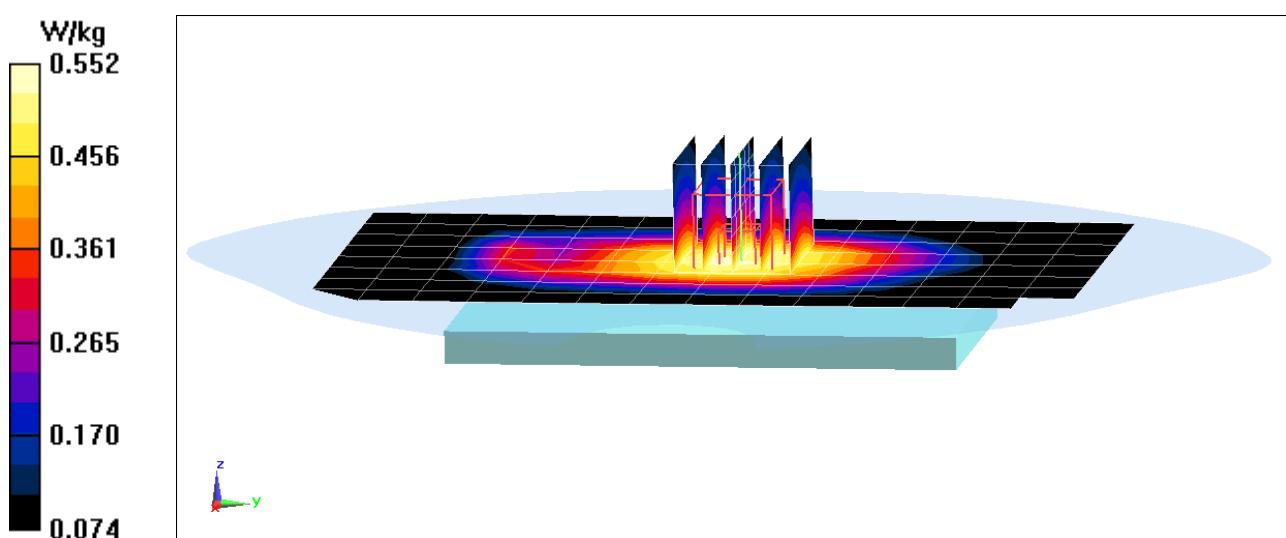

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04106

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 54.098$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2016; Ambient Temp: 21.4°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3319; ConvF(4.7, 4.7, 4.7); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: PCS CDMA, Body SAR, Back side, Mid.ch


Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.92 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.342 W/kg

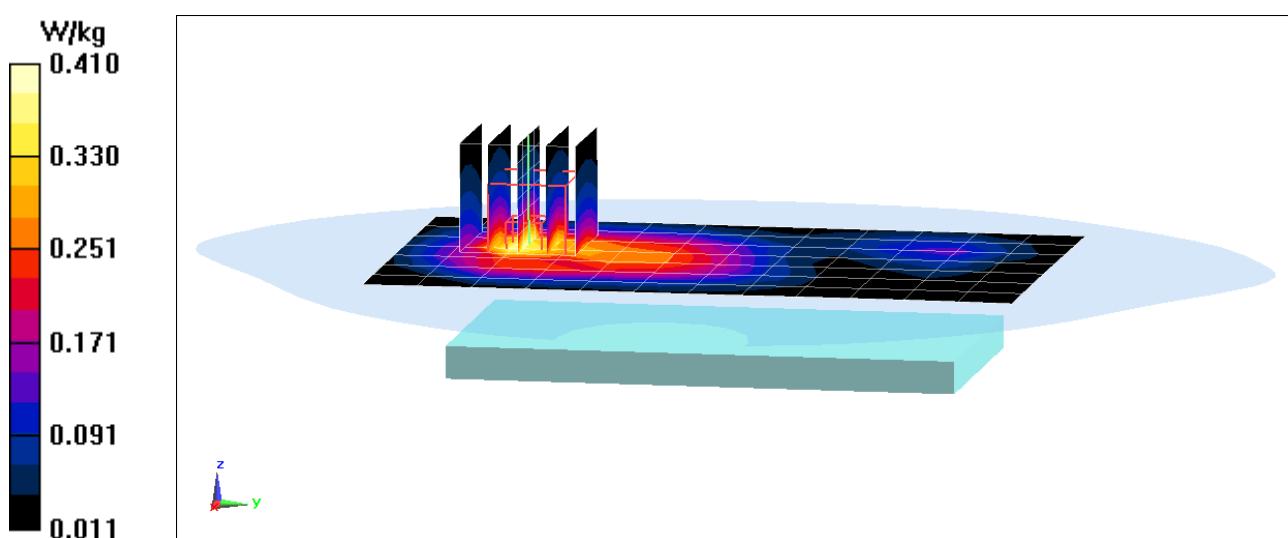

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04155

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 54.044$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-29-2016; Ambient Temp: 20.7°C; Tissue Temp: 20.6°C

Probe: ES3DV3 - SN3319; ConvF(4.7, 4.7, 4.7); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: PCS EVDO Rev. 0, Body SAR, Front side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.71 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.703 W/kg

SAR(1 g) = 0.443 W/kg

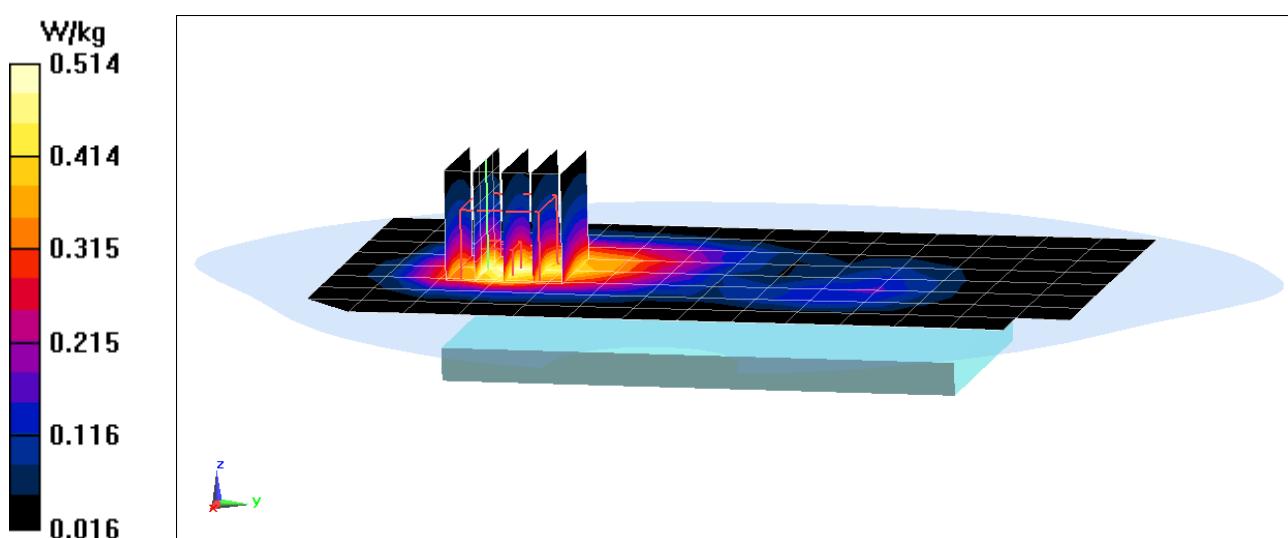

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04148

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.376$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2016; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7406; ConvF(9.35, 9.35, 9.35); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.29 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.254 W/kg

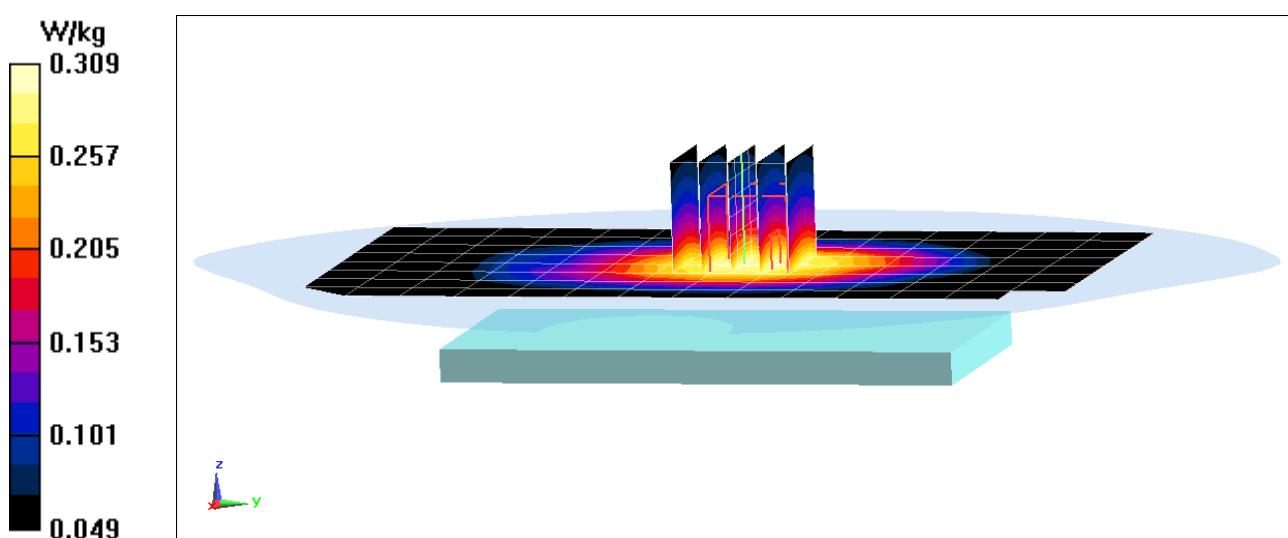

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04148

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.376$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2016; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7406; ConvF(9.35, 9.35, 9.35); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 850, Body SAR, Back side, Mid.ch, 3 Tx Slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.37 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.295 W/kg

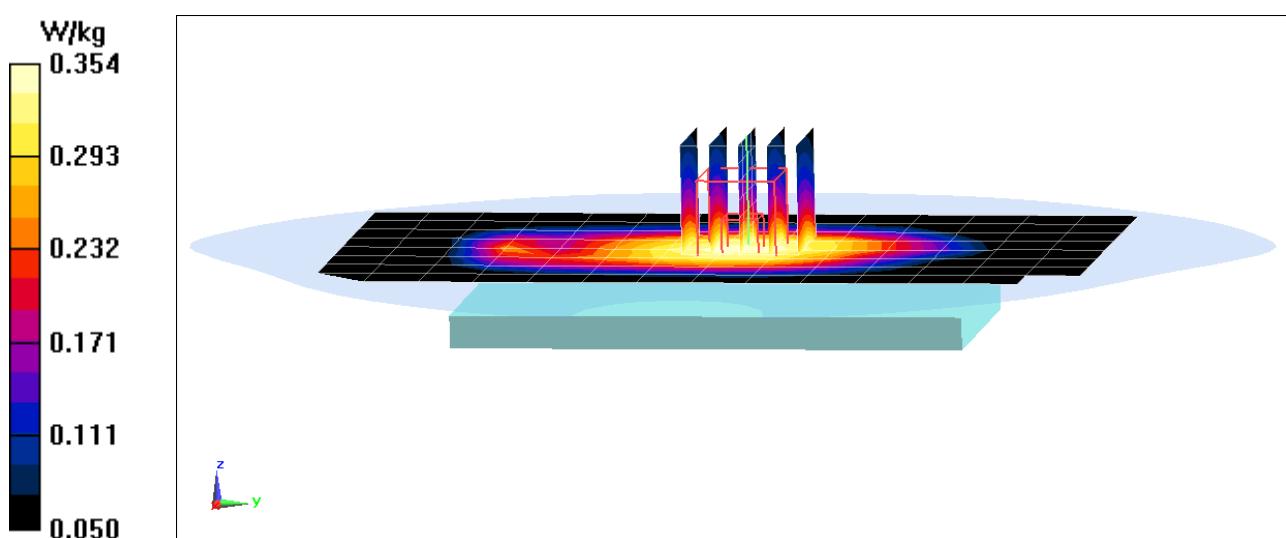

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04148

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 54.098$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2016; Ambient Temp: 21.4°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3319; ConvF(4.7, 4.7, 4.7); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GSM 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.56 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.152 W/kg

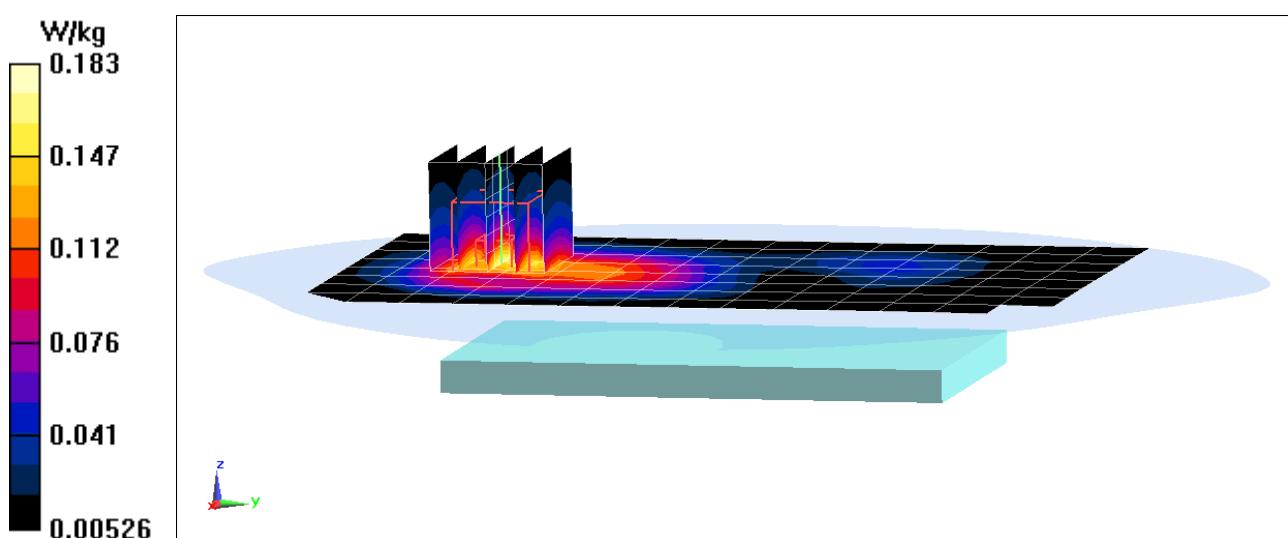

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04122

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.076

Medium: 1900 Body Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 54.098$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2016; Ambient Temp: 21.4°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3319; ConvF(4.7, 4.7, 4.7); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 4 Tx Slots


Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.25 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.318 W/kg

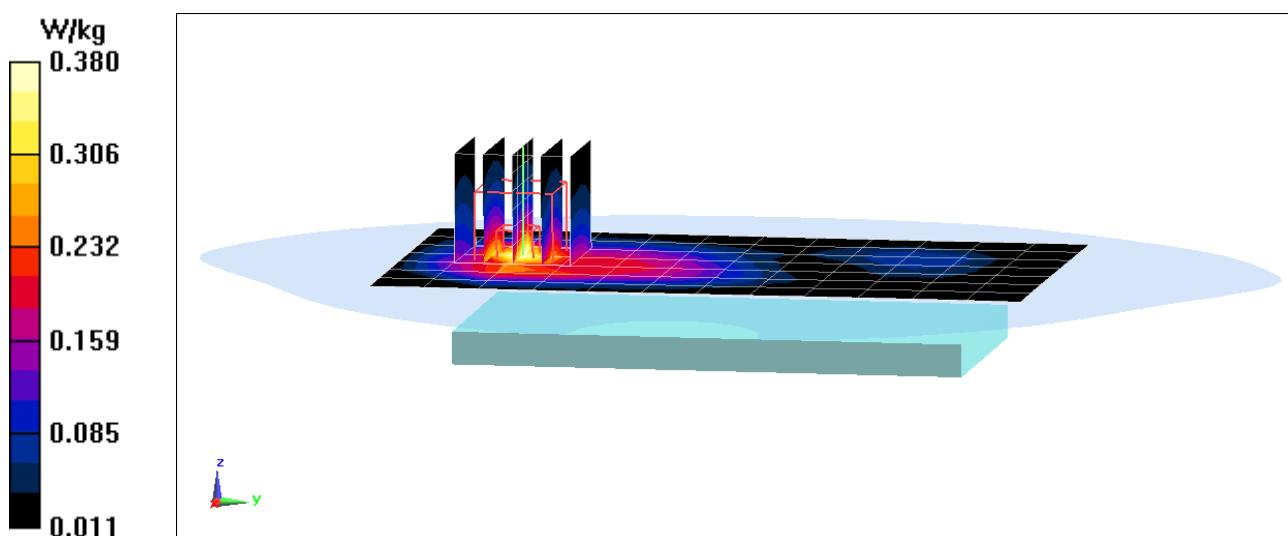

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04148

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.376$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2016; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7406; ConvF(9.35, 9.35, 9.35); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.58 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.331 W/kg

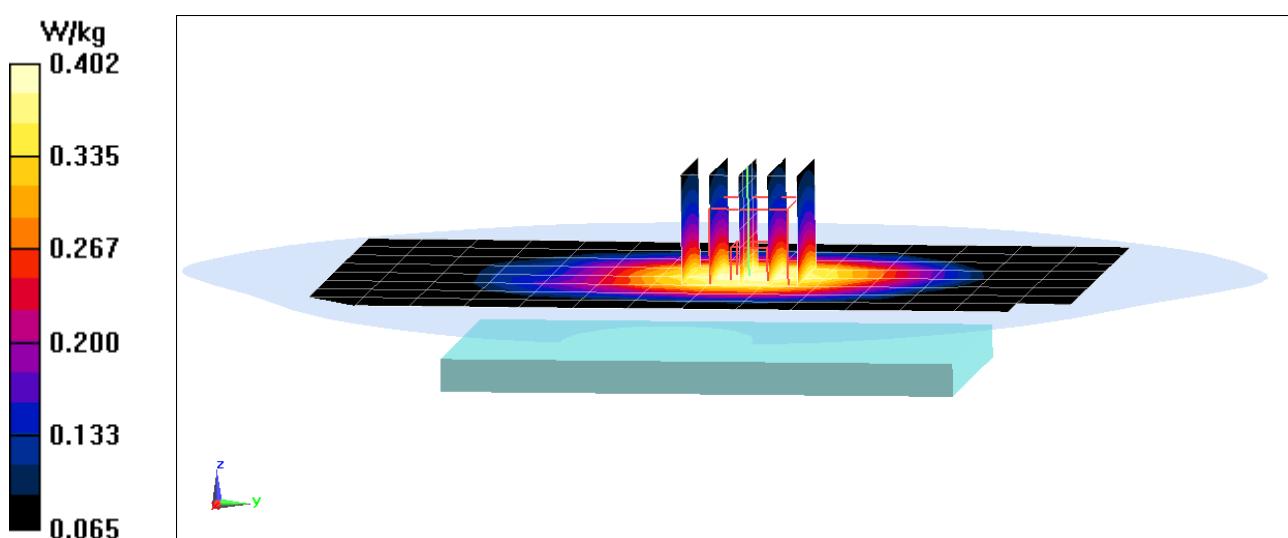

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04148

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.376$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2016; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7406; ConvF(9.35, 9.35, 9.35); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.40 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.367 W/kg

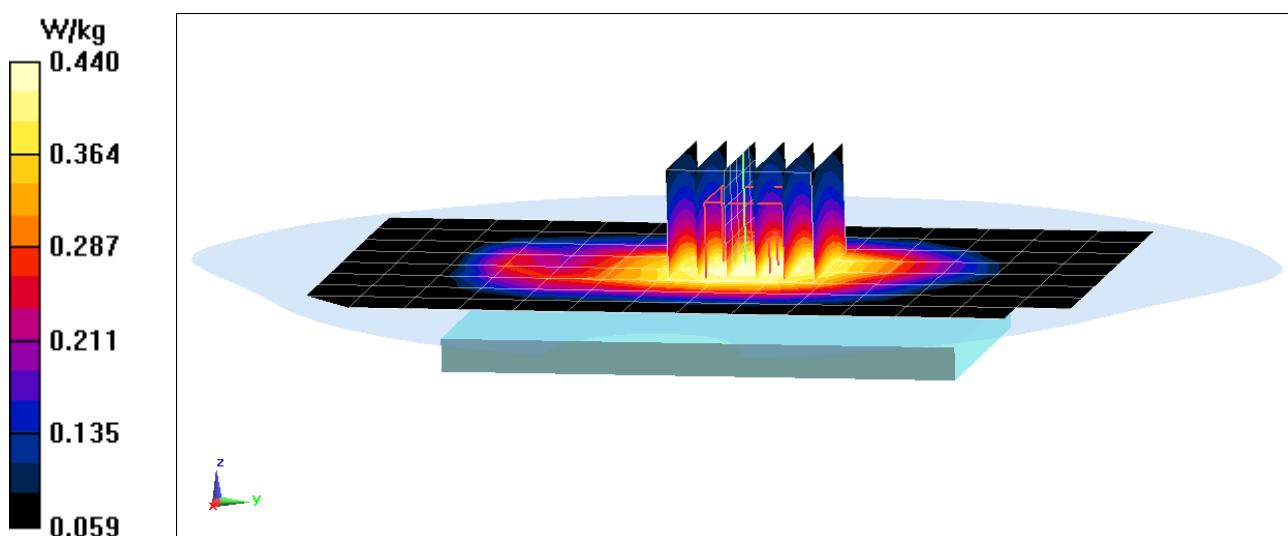

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 01664

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4$ MHz; $\sigma = 1.495$ S/m; $\epsilon_r = 51.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10-06-2016; Ambient Temp: 22.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7406; ConvF(7.78, 7.78, 7.78); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1750, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.84 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.705 W/kg

SAR(1 g) = 0.455 W/kg

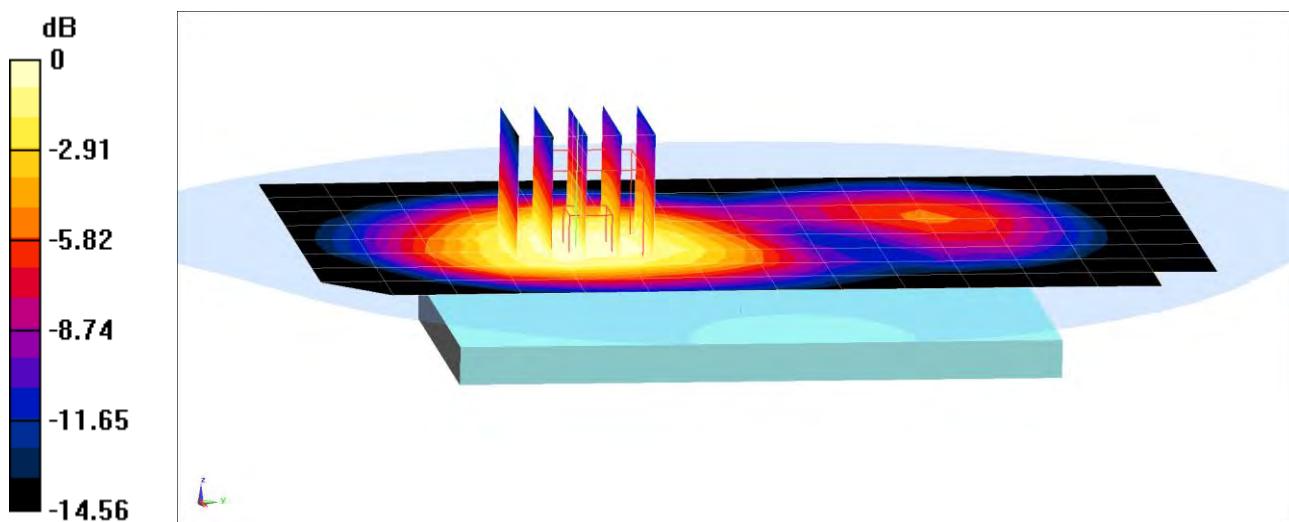

0 dB = 0.612 W/kg = -2.13 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 01664

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4$ MHz; $\sigma = 1.495$ S/m; $\epsilon_r = 51.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-06-2016; Ambient Temp: 22.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7406; ConvF(7.78, 7.78, 7.78); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1750, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.37 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.770 W/kg

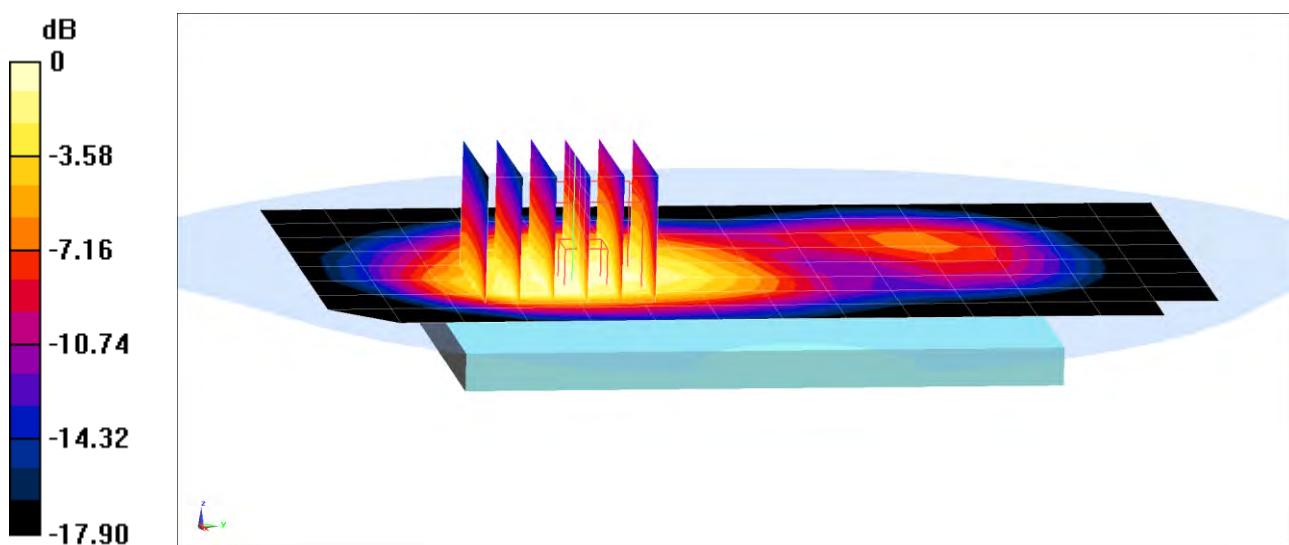

0 dB = 1.07 W/kg = 0.29 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04148

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 54.098$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2016; Ambient Temp: 21.4°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3319; ConvF(4.7, 4.7, 4.7); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.68 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.524 W/kg

SAR(1 g) = 0.332 W/kg

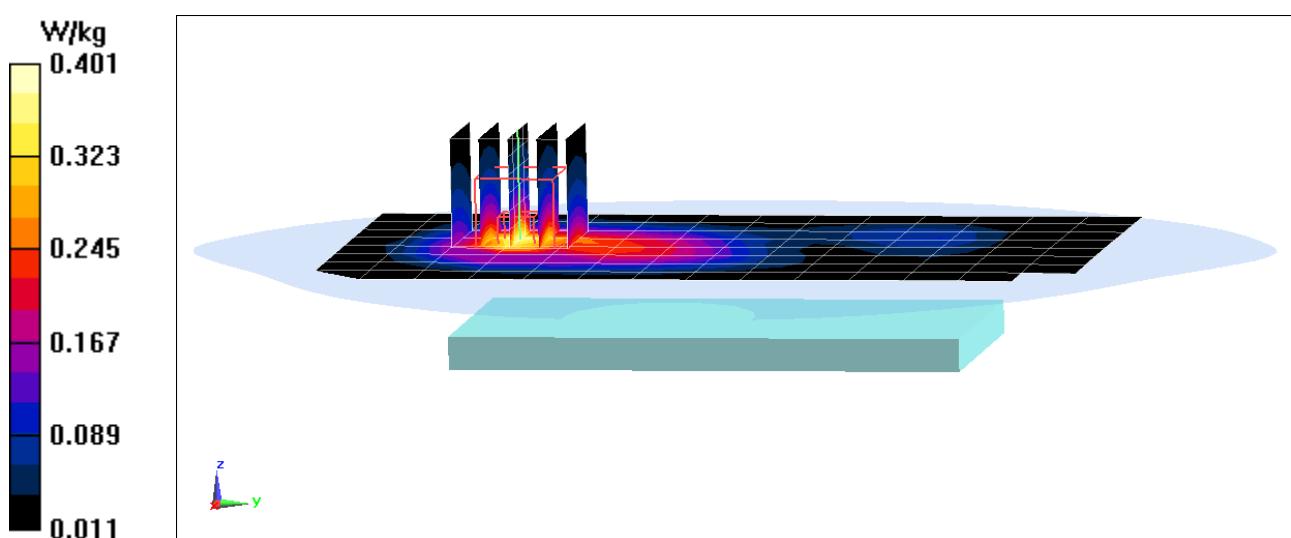

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04122

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 54.098$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2016; Ambient Temp: 21.4°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3319; ConvF(4.7, 4.7, 4.7); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.22 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.314 W/kg

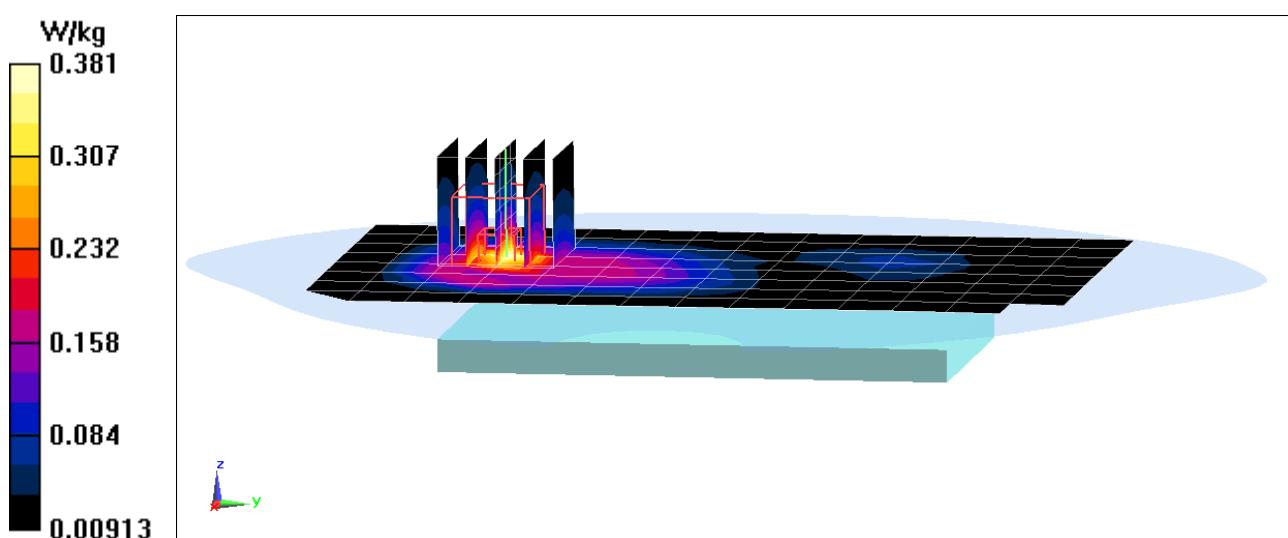

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04106

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2016; Ambient Temp: 20.7°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3319; ConvF(6.06, 6.06, 6.06); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.55 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(1 g) = 0.305 W/kg

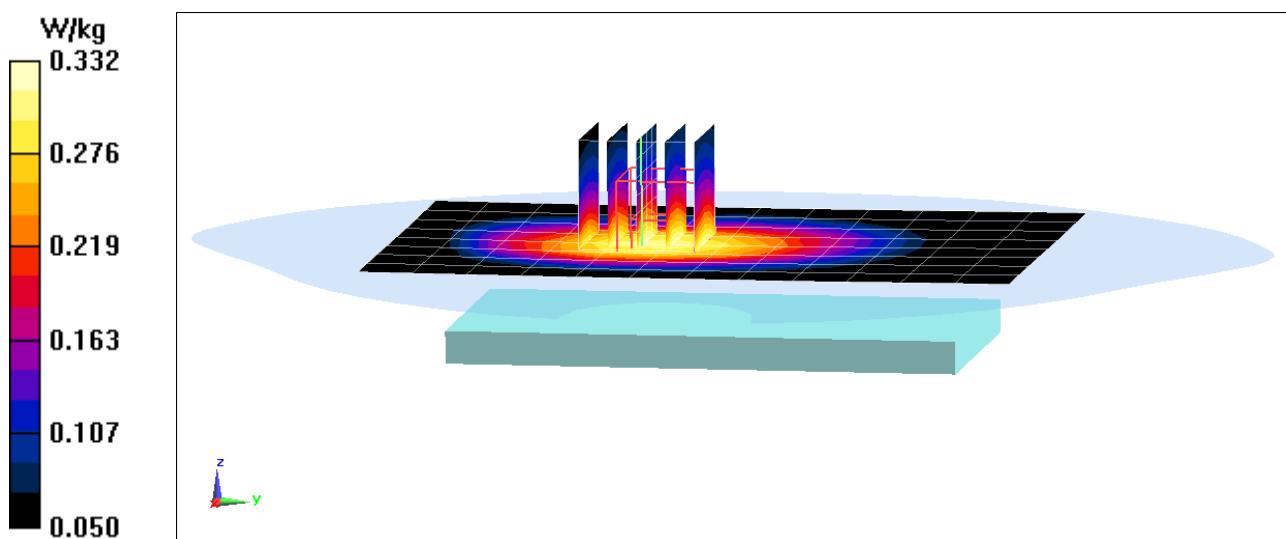

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04106

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2016; Ambient Temp: 20.7°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3319; ConvF(6.06, 6.06, 6.06); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.14 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.386 W/kg

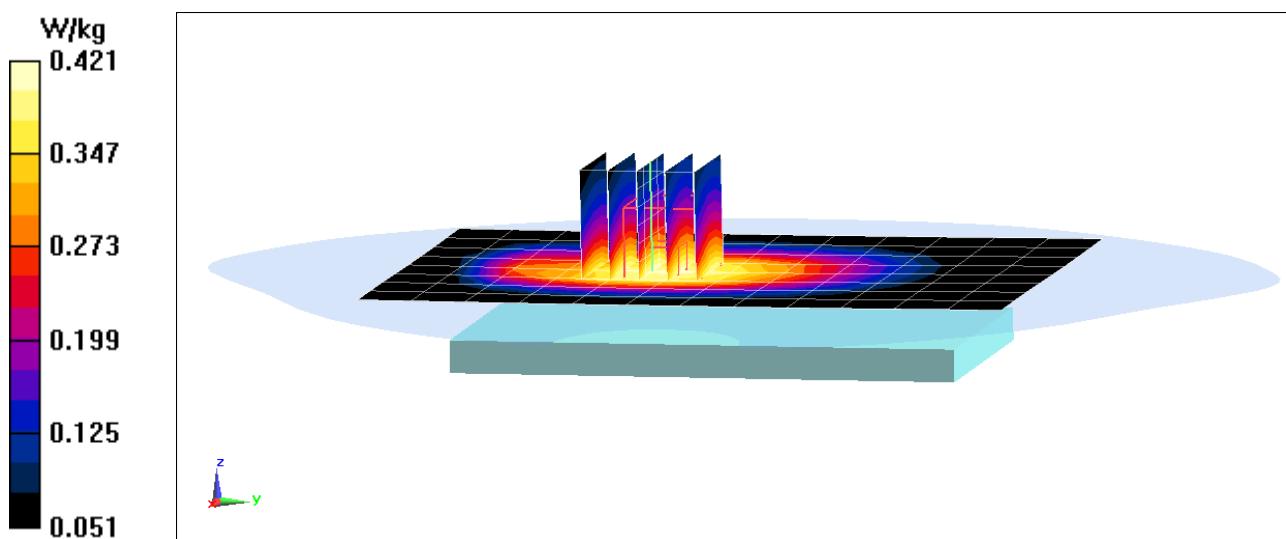

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04106

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.984$ S/m; $\epsilon_r = 54.431$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2016; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7406; ConvF(9.35, 9.35, 9.35); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch
15 MHz Bandwidth, QPSK, 1 RB, 74 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.75 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.605 W/kg

SAR(1 g) = 0.451 W/kg

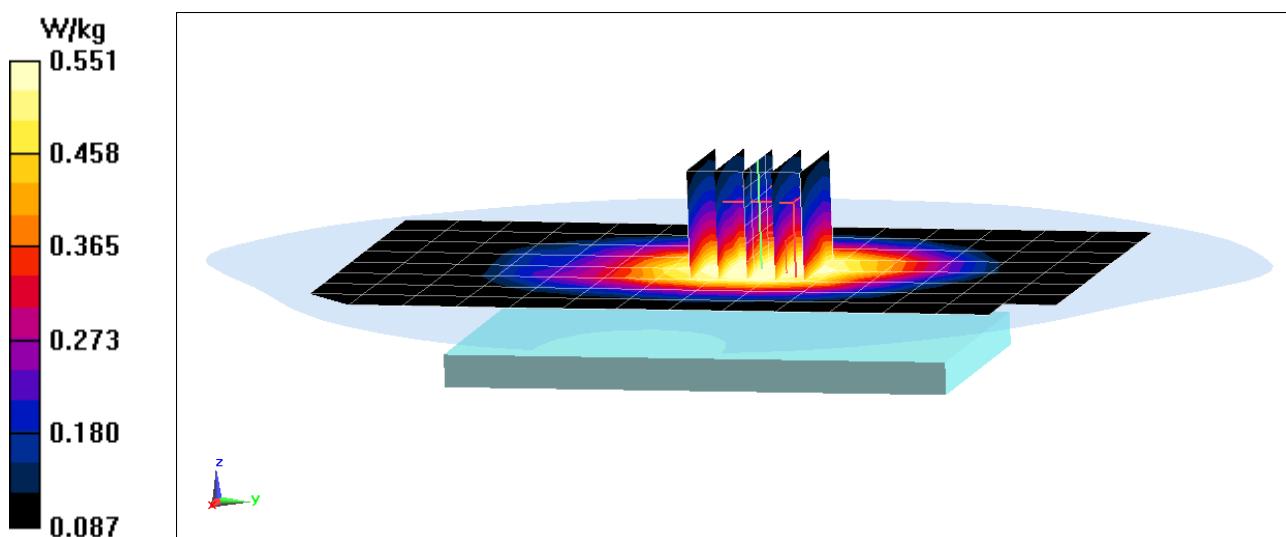

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04106

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.984$ S/m; $\epsilon_r = 54.431$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2016; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7406; ConvF(9.35, 9.35, 9.35); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch
15 MHz Bandwidth, QPSK, 1 RB, 74 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.53 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.631 W/kg

SAR(1 g) = 0.484 W/kg

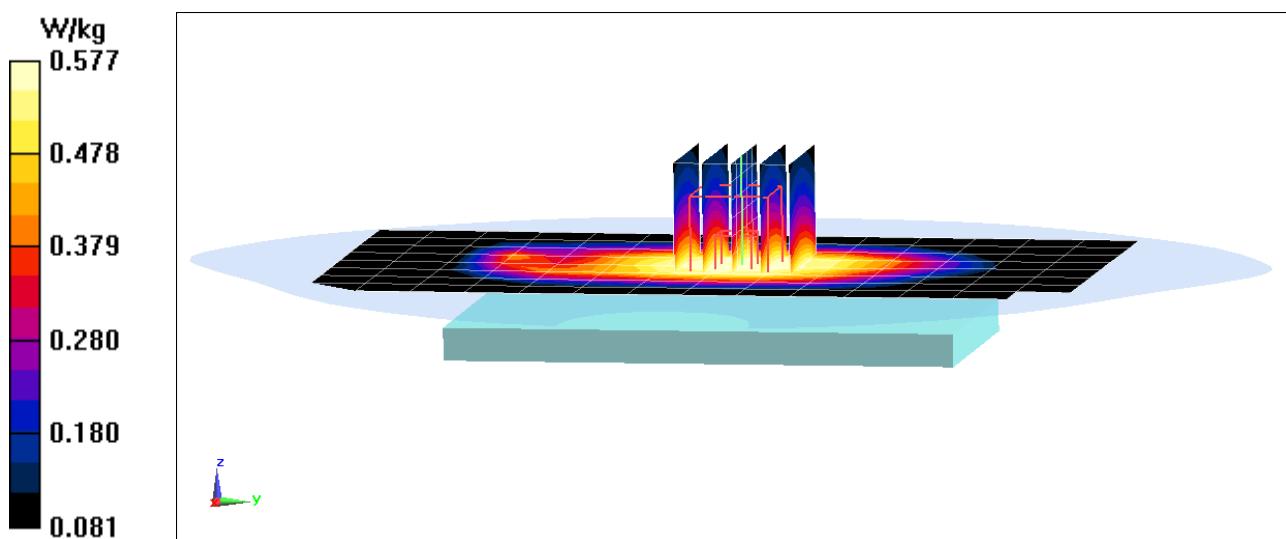

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04114

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 51.472$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-27-2016; Ambient Temp: 22.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(5.02, 5.02, 5.02); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.59 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.506 W/kg

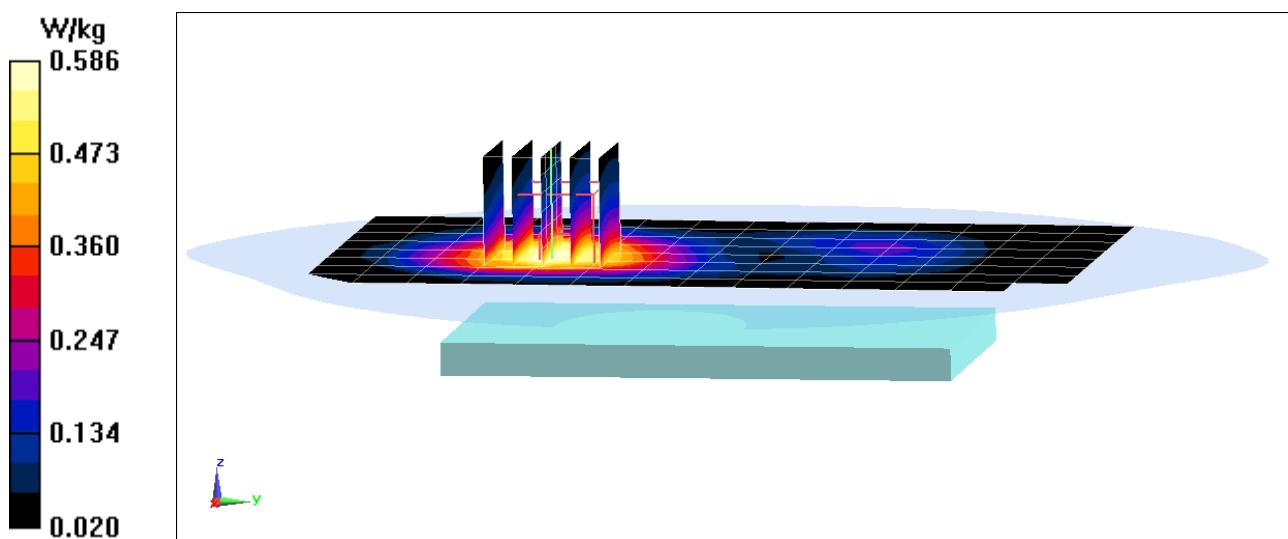

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04114

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5$ MHz; $\sigma = 1.495$ S/m; $\epsilon_r = 51.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-06-2016; Ambient Temp: 22.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7406; ConvF(7.78, 7.78, 7.78); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.61 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.904 W/kg

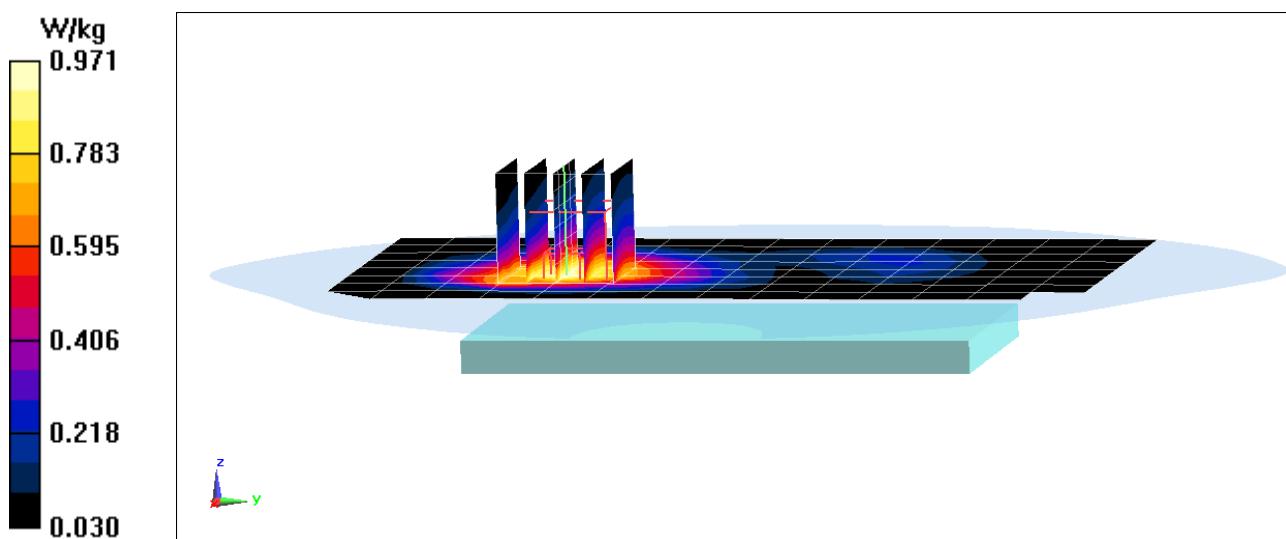

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04106

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1860$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 54.156$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2016; Ambient Temp: 21.4°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3319; ConvF(4.7, 4.7, 4.7); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 25 (PCS), Body SAR, Back side, Low.ch
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.99 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.344 W/kg

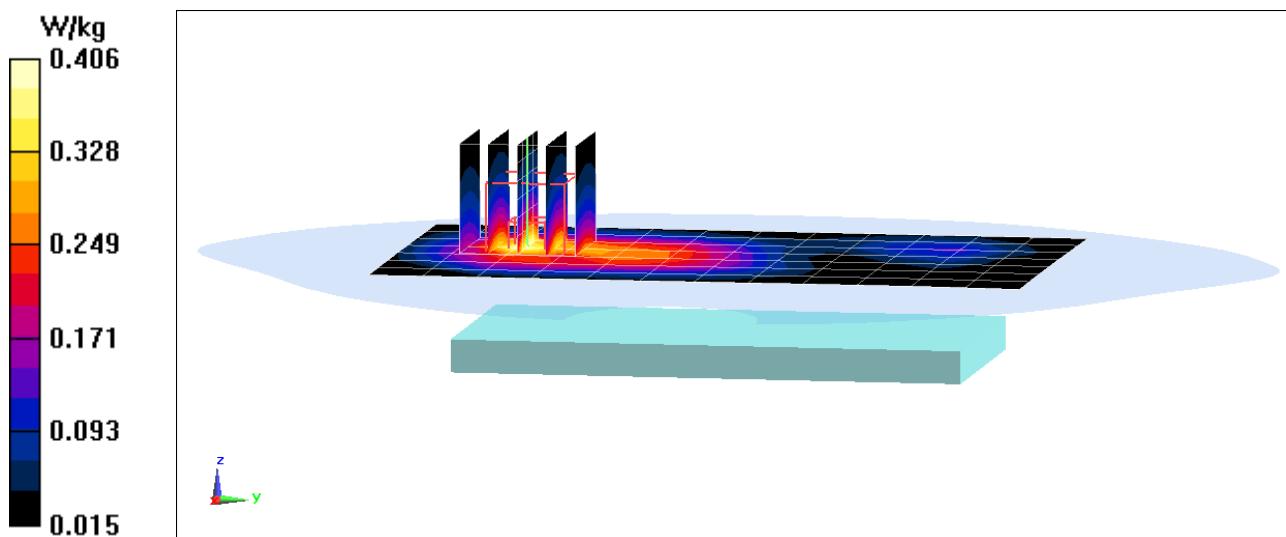

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04155

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1882.5$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 54.089$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2016; Ambient Temp: 21.4°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3319; ConvF(4.7, 4.7, 4.7); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 25 (PCS), Body SAR, Front side, Mid.ch
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.32 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.630 W/kg

SAR(1 g) = 0.405 W/kg

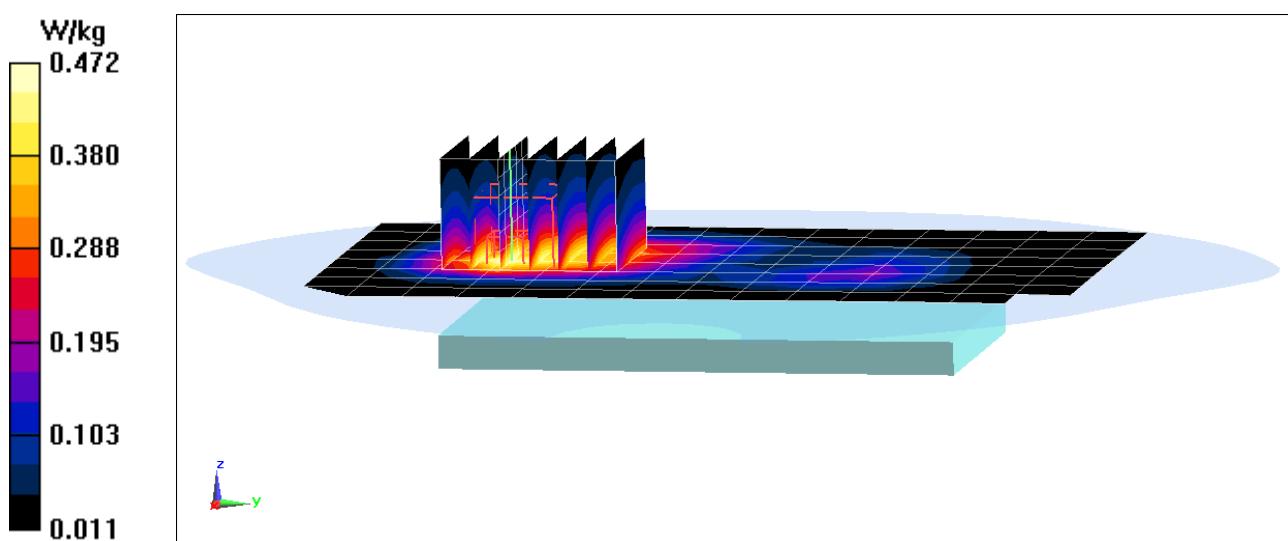

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04106

Communication System: UID 0, LTE Band 41; Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2600 Body Medium parameters used (interpolated):

$f = 2680$ MHz; $\sigma = 2.327$ S/m; $\epsilon_r = 50.222$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2016; Ambient Temp: 22.6°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3334; ConvF(4.29, 4.29, 4.29); Calibrated: 11/17/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 11/11/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 41, Body SAR, Back side, High.ch
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.85 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.759 W/kg

SAR(1 g) = 0.390 W/kg

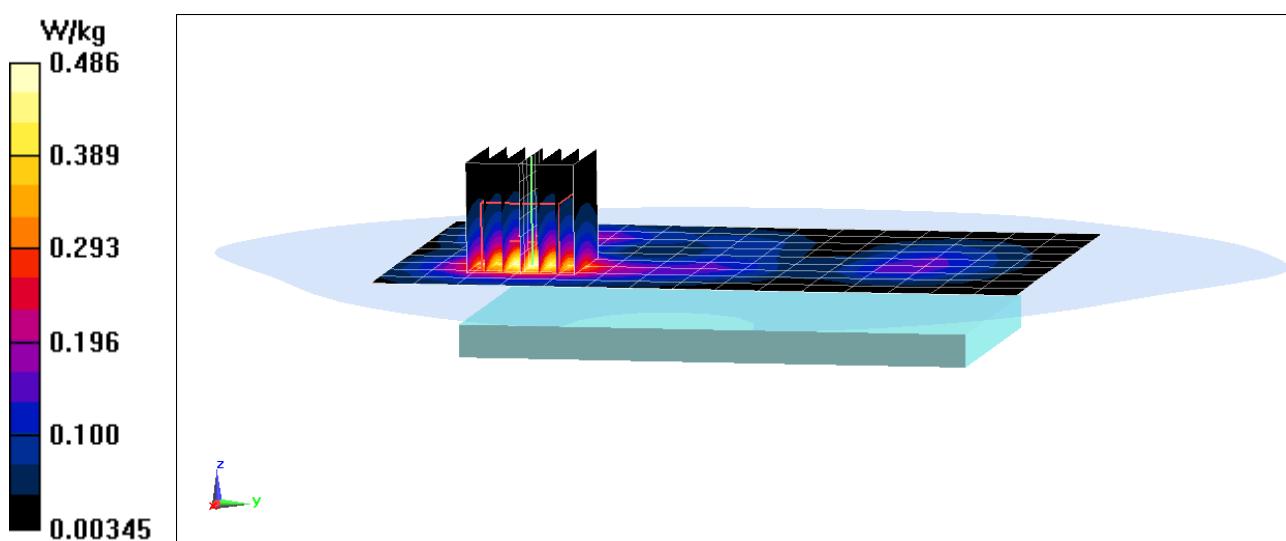

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 04155

Communication System: UID 0, LTE Band 41; Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2600 Body Medium parameters used (interpolated):

$f = 2680$ MHz; $\sigma = 2.327$ S/m; $\epsilon_r = 50.222$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2016; Ambient Temp: 22.6°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3334; ConvF(4.29, 4.29, 4.29); Calibrated: 11/17/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 11/11/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: LTE Band 41, Body SAR, Back side, High.ch
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.04 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.526 W/kg

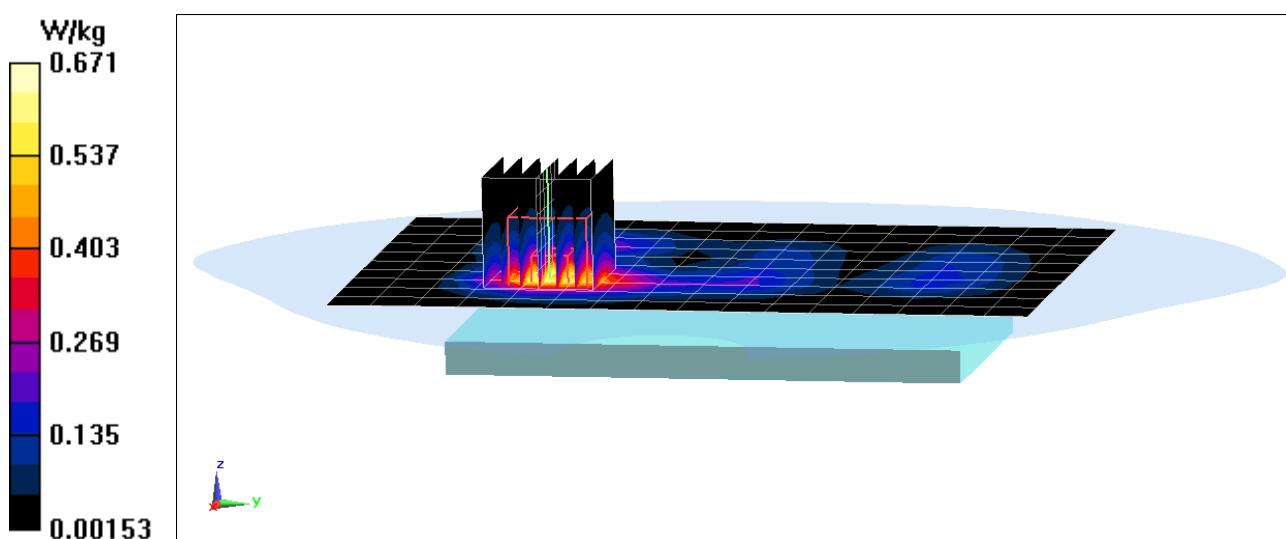

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 03892

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2462$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 51.122$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-25-2016; Ambient Temp: 22.4°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3334; ConvF(4.45, 4.45, 4.45); Calibrated: 11/17/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 11/11/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11b, 22 MHz Bandwidth Body SAR, Ch 11, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.707 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.134 W/kg

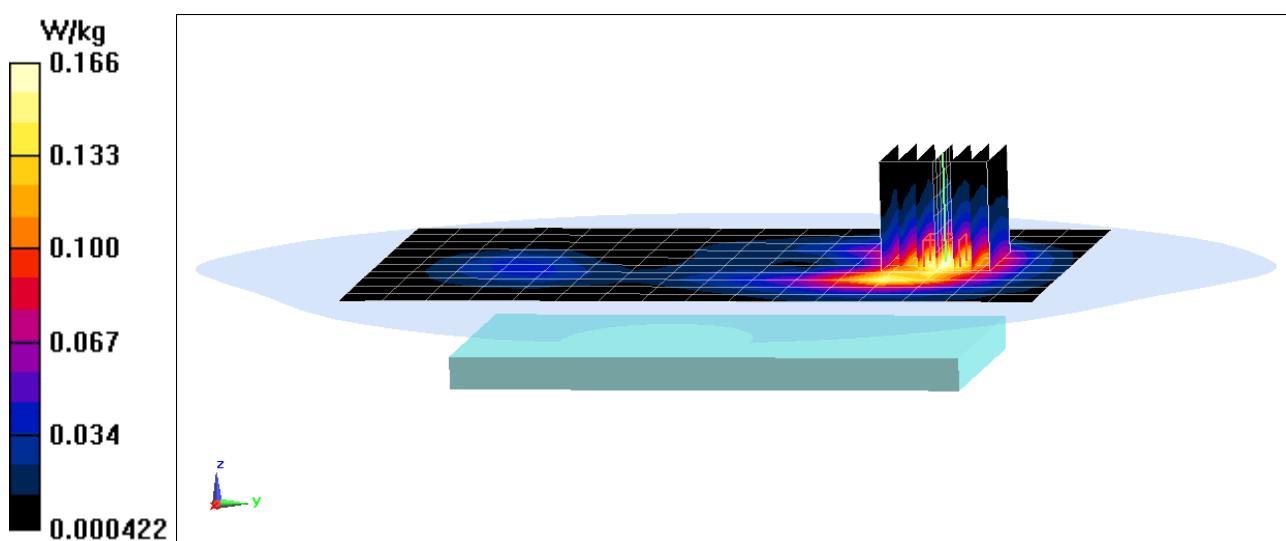

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 03892

Communication System: UID 0, IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2462$ MHz; $\sigma = 2.013$ S/m; $\epsilon_r = 51.122$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-25-2016; Ambient Temp: 22.4°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3334; ConvF(4.45, 4.45, 4.45); Calibrated: 11/17/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 11/11/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Mode: IEEE 802.11b, 22 MHz Bandwidth Body SAR, Ch 11, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.086 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.286 W/kg

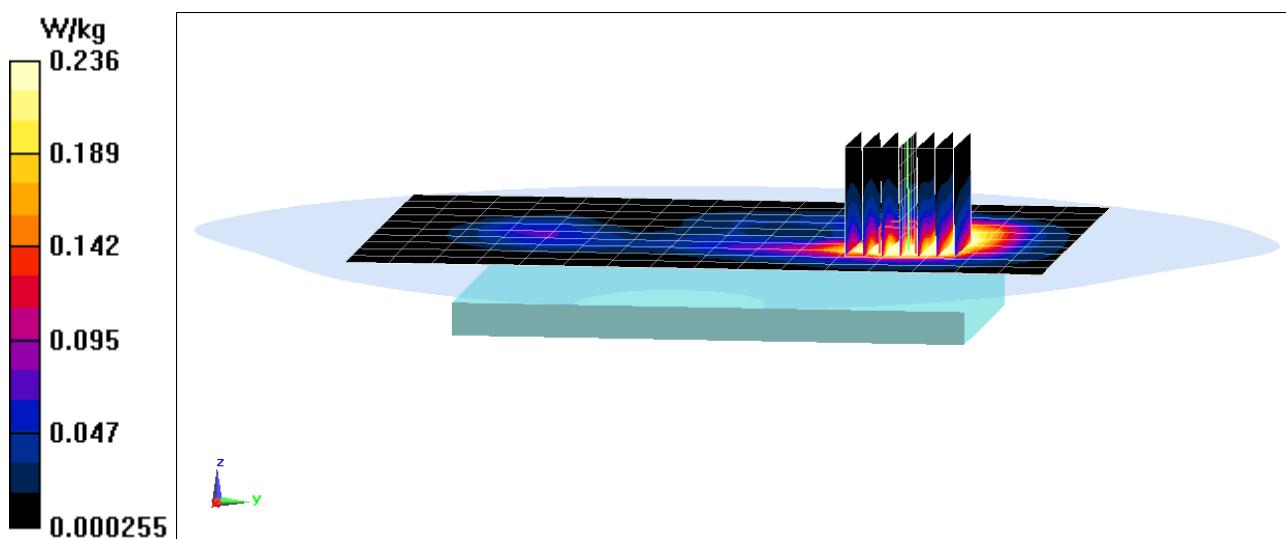

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 03892

Communication System: UID 0, IEEE 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5260$ MHz; $\sigma = 5.433$ S/m; $\epsilon_r = 47.634$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-22-2016; Ambient Temp: 22.6°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN3914; ConvF(4.32, 4.32, 4.32); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, UNII-2A, 20 MHz Bandwidth
Body SAR, Ch 52, 6 Mbps, Back Side**


Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 4.335 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.311 W/kg

SAR(1 g) = 0.090 W/kg

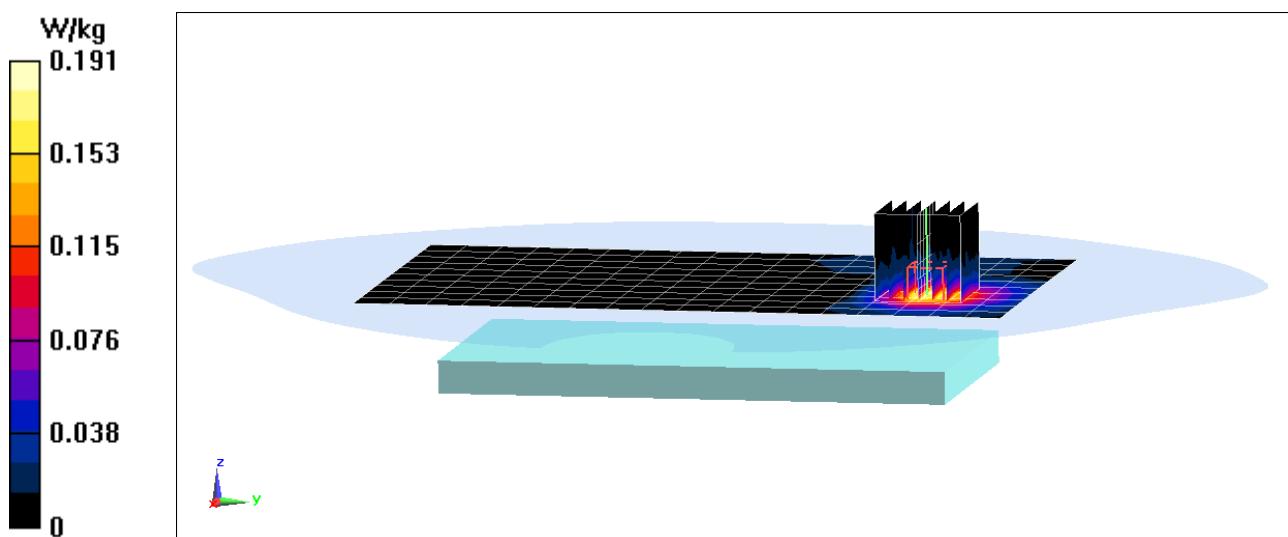

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ327P; Type: Portable Handset; Serial: 03892

Communication System: UID 0, IEEE 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5785$ MHz; $\sigma = 6.183$ S/m; $\epsilon_r = 47.224$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-13-2016; Ambient Temp: 21.8°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3914; ConvF(3.86, 3.86, 3.86); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Mode: IEEE 802.11a, UNII-3, 20 MHz Bandwidth
Body SAR, Ch 157, 6 Mbps, Front Side**


Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 6.735 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.981 W/kg

SAR(1 g) = 0.254 W/kg

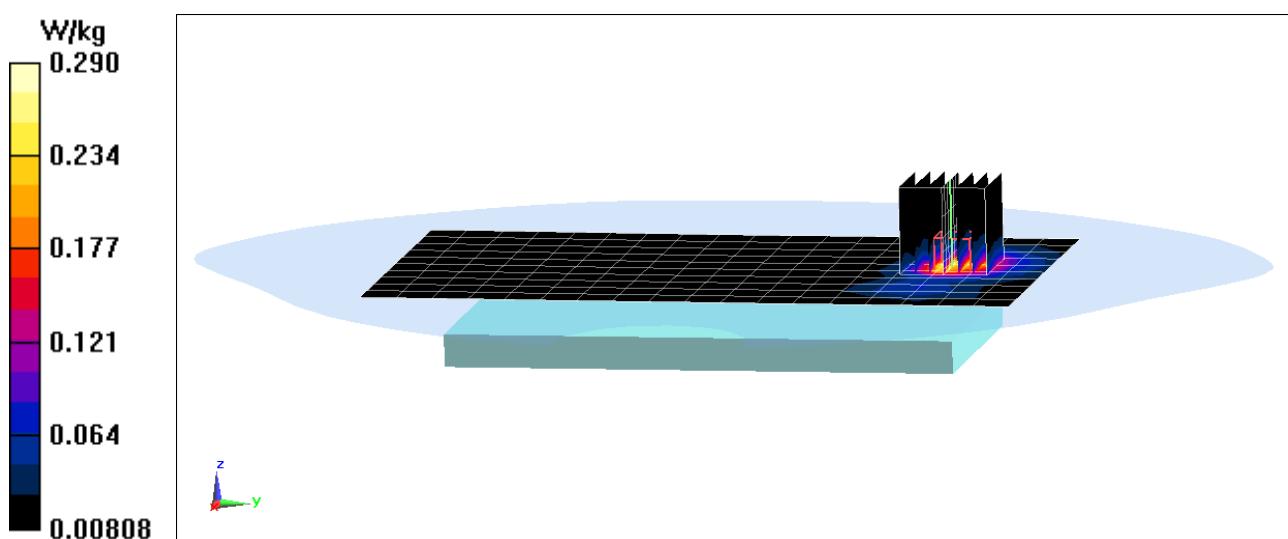

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 750$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.141$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2016; Ambient Temp: 21.3°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3318; ConvF(6.48, 6.48, 6.48); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.54 W/kg

SAR(1 g) = 1.71 W/kg

Deviation(1 g) = 4.01%

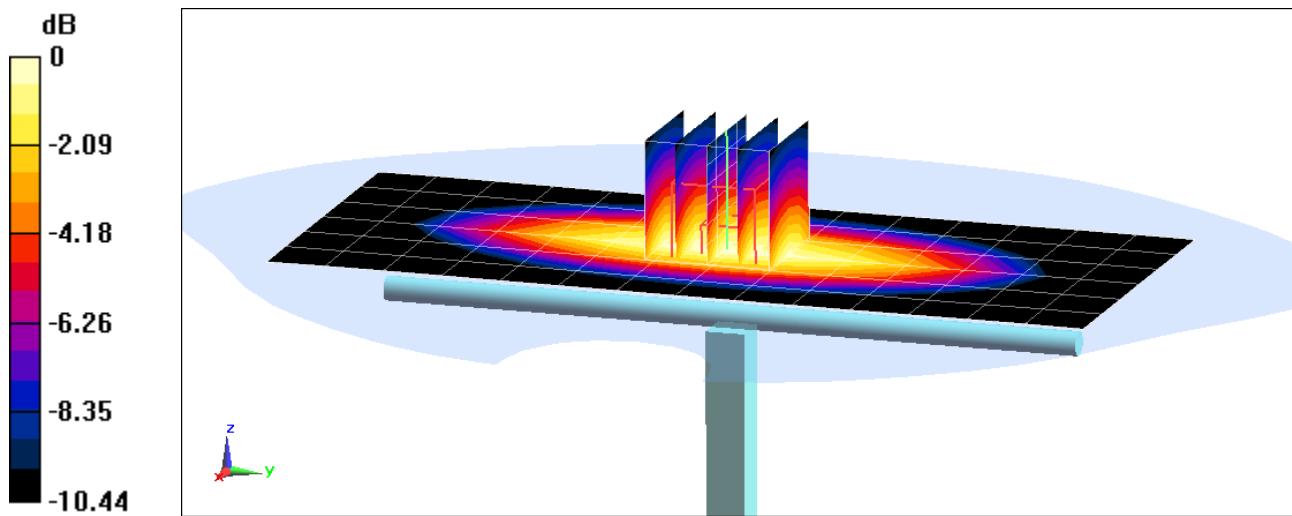

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.907 \text{ S/m}$; $\epsilon_r = 40.873$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2016; Ambient Temp: 24.2°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN7410; ConvF(9.68, 9.68, 9.68); Calibrated: 7/25/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/12/2016

Phantom: Sub TWIN SAM; Type: QD000P40CC; Serial: TP-1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.84 W/kg

SAR(1 g) = 1.9 W/kg

Deviation(1 g) = 0.32%

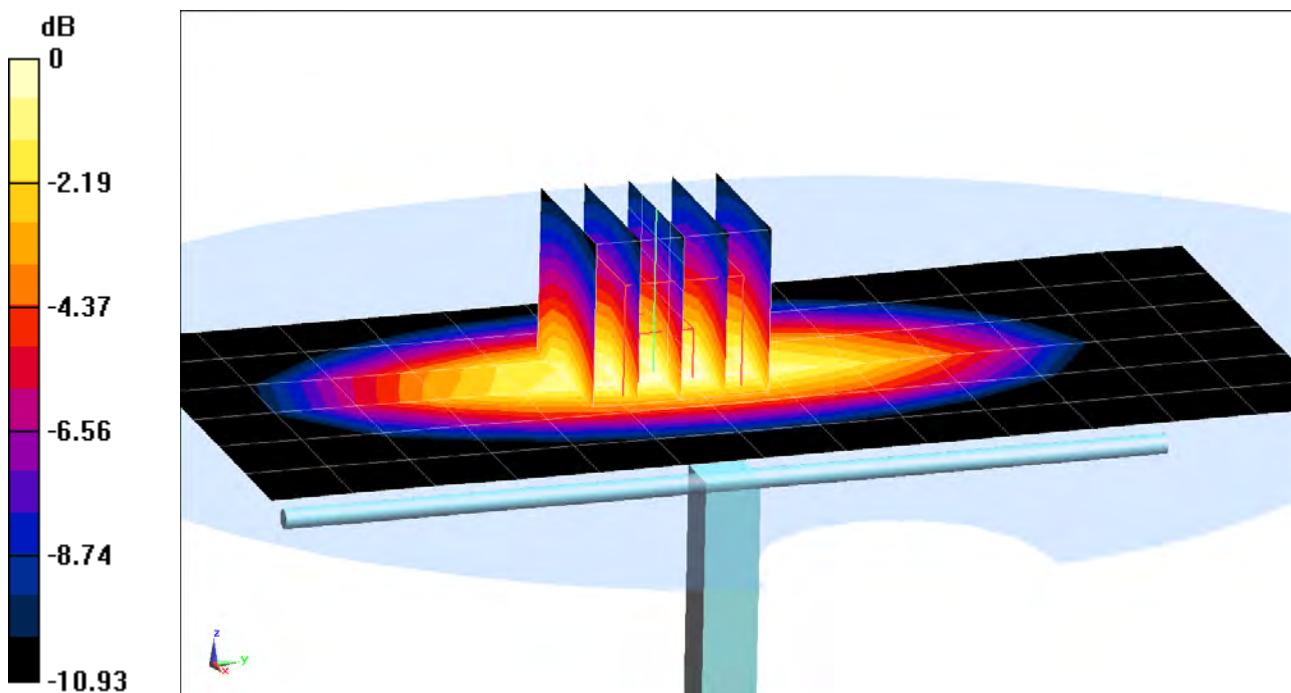

0 dB = 2.54 W/kg = 4.05 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 38.637$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-27-2016; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3213; ConvF(5.23, 5.23, 5.23); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Left; Type: QD000P40CD; Serial: 1687

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.08 W/kg

SAR(1 g) = 3.88 W/kg

Deviation(1 g) = 5.72%

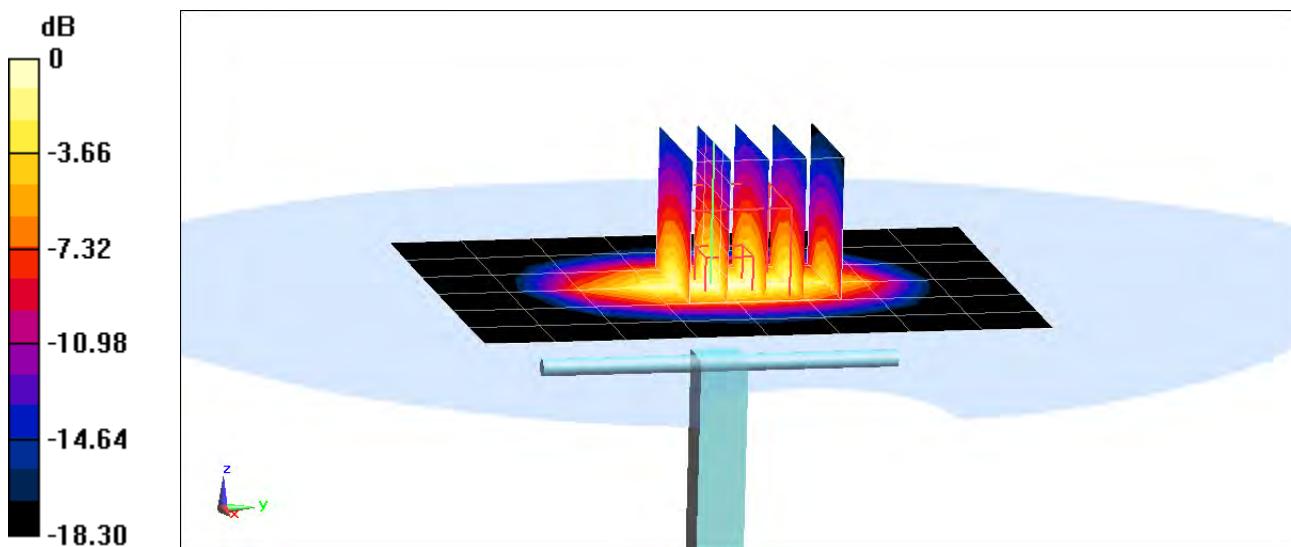

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 40.529$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-06-2016; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: ES3DV3 - SN3213; ConvF(5.23, 5.23, 5.23); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.75 W/kg

SAR(1 g) = 3.73 W/kg

Deviation(1 g) = 3.04%

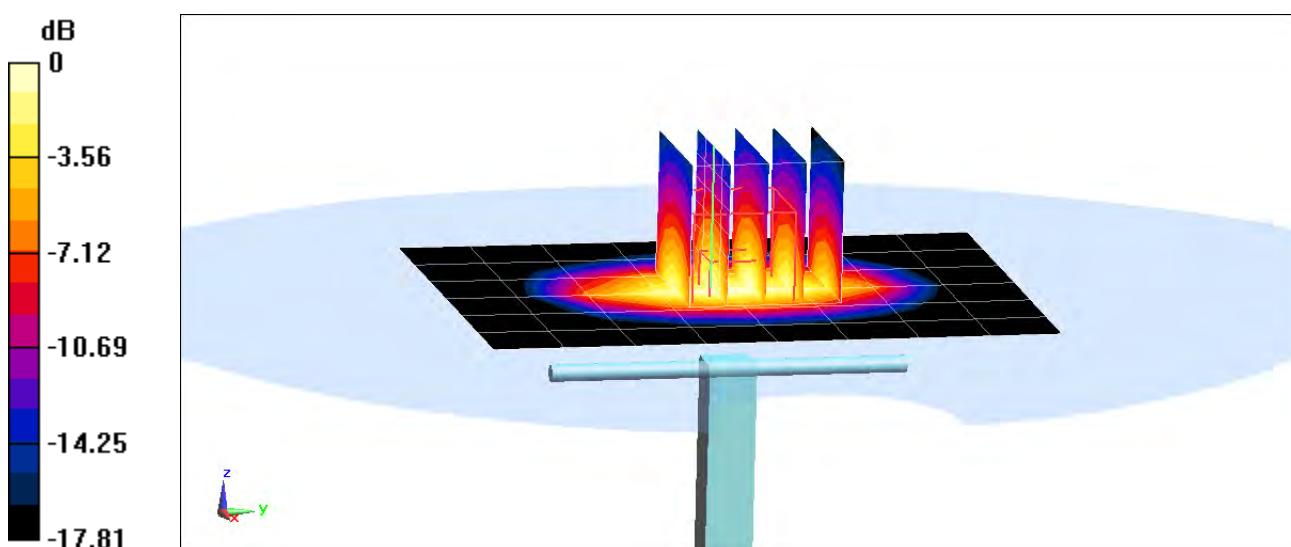

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900$ MHz; $\sigma = 1.437$ S/m; $\epsilon_r = 39.754$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-27-2016; Ambient Temp: 23.7°C; Tissue Temp: 22.0°C

Probe: ES3DV2 - SN3022; ConvF(4.96, 4.96, 4.96); Calibrated: 7/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1466; Calibrated: 1/15/2016

Phantom: SAM Sub; Type: QD000P40CC; Serial: TP:1357

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.54 W/kg

SAR(1 g) = 4.11 W/kg

Deviation(1 g) = 3.01%

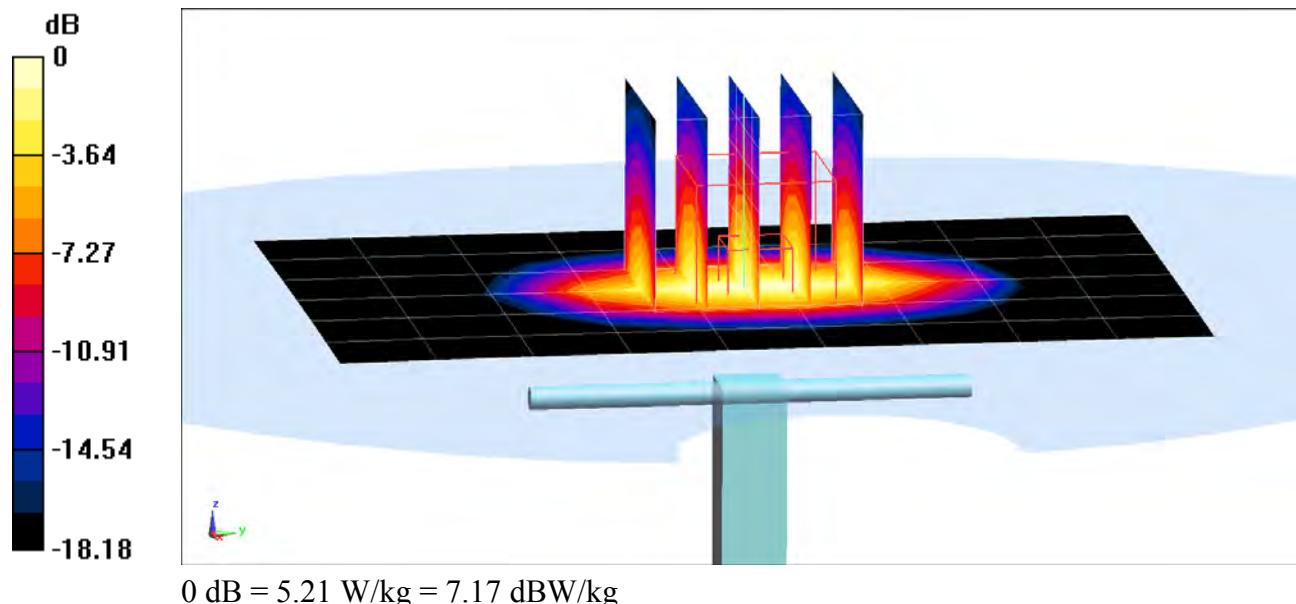

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: 2450 Head Medium parameters used:
 $f = 2450$ MHz; $\sigma = 1.857$ S/m; $\epsilon_r = 38.465$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-22-2016; Ambient Temp: 22.9°C; Tissue Temp: 23.1°C


Probe: EX3DV4 - SN7409; ConvF(6.9, 6.9, 6.9); Calibrated: 5/17/2016;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (9x9x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Peak SAR (extrapolated) = 11.9 W/kg
SAR(1 g) = 5.49 W/kg
Deviation(1 g) = 3.98 %

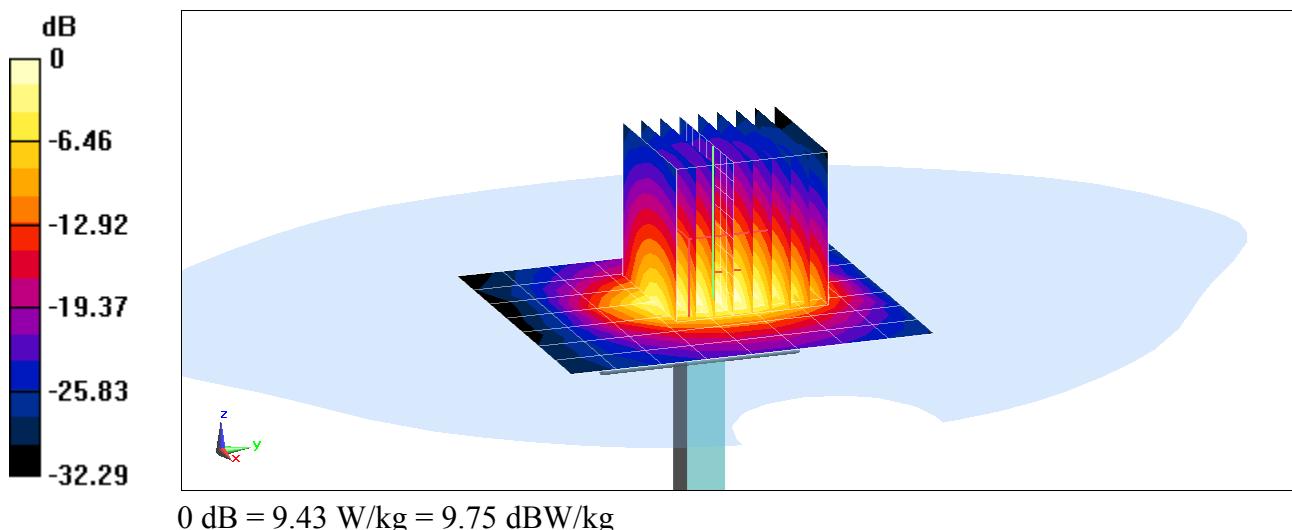

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Head Medium parameters used:

$f = 2600$ MHz; $\sigma = 2.047$ S/m; $\epsilon_r = 37.573$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-27-2016; Ambient Temp: 22.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7409; ConvF(6.77, 6.77, 6.77); Calibrated: 5/17/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 5/11/2016

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 13.8 W/kg

SAR(1 g) = 6.04 W/kg

Deviation(1 g) = 7.28%

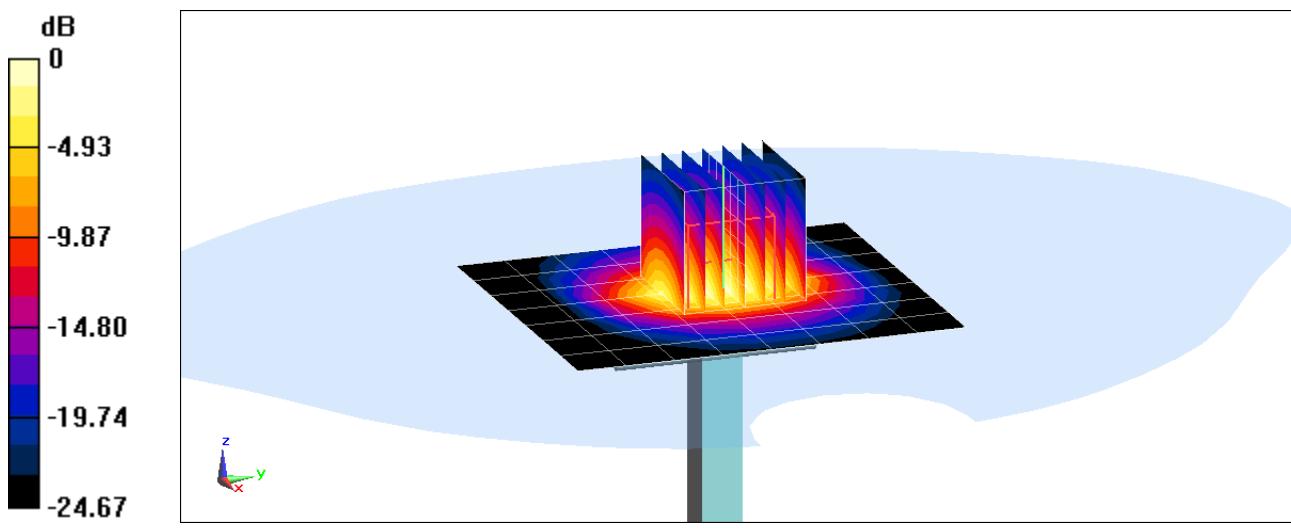

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5 GHz Head Medium parameters used (interpolated):

$f = 5250$ MHz; $\sigma = 4.692$ S/m; $\epsilon_r = 35.493$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2016; Ambient Temp: 21.3°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3914; ConvF(5.07, 5.07, 5.07); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 3.82 W/kg

Deviation(1 g) = -3.54%

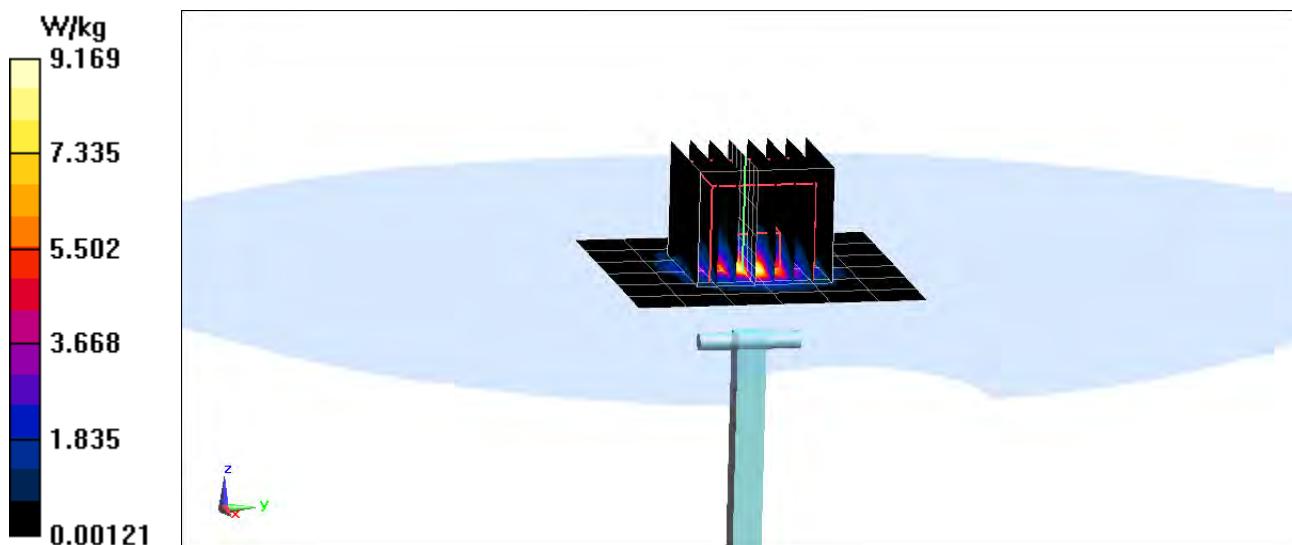

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1
Medium: 5 GHz Head Medium parameters used:
 $f = 5600$ MHz; $\sigma = 5.038$ S/m; $\epsilon_r = 34.983$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm


Test Date: 09-26-2016; Ambient Temp: 21.3°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3914; ConvF(4.66, 4.66, 4.66); Calibrated: 2/22/2016;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/18/2016
Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5600 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4
Peak SAR (extrapolated) = 18.3 W/kg
SAR(1 g) = 4.05 W/kg
Deviation(1 g) = -2.76%

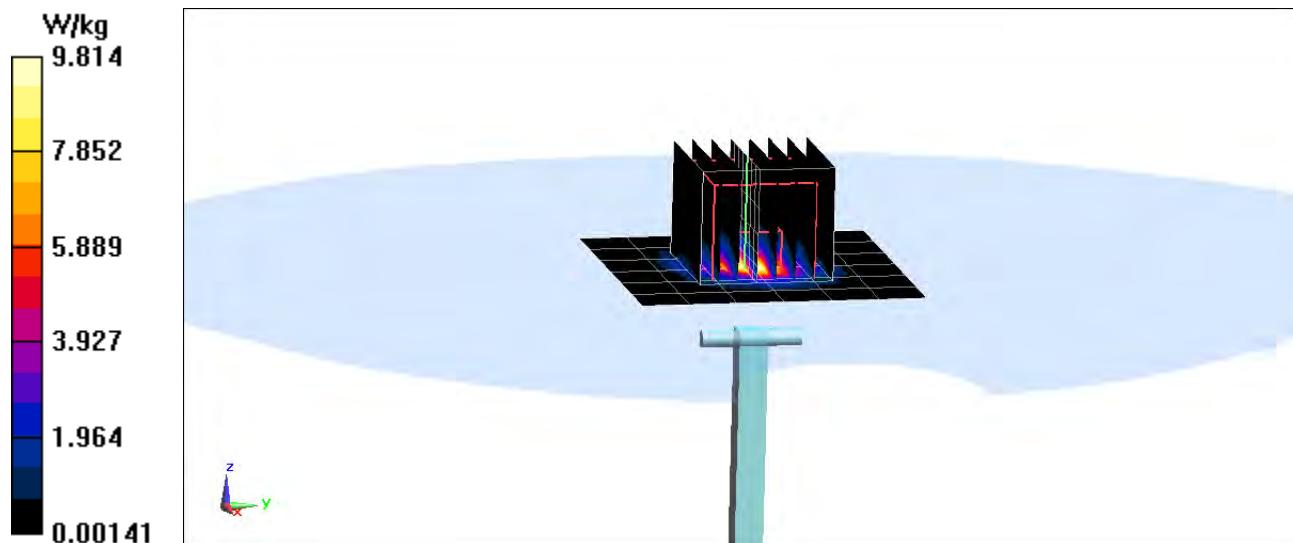

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1
Medium: 5 GHz Head Medium parameters used (interpolated):
 $f = 5750$ MHz; $\sigma = 5.204$ S/m; $\epsilon_r = 34.75$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm


Test Date: 09-26-2016; Ambient Temp: 21.3°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3914; ConvF(4.74, 4.74, 4.74); Calibrated: 2/22/2016;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/18/2016
Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5750 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4
Peak SAR (extrapolated) = 17.7 W/kg
SAR(1 g) = 3.72 W/kg
Deviation(1 g) = -8.71%

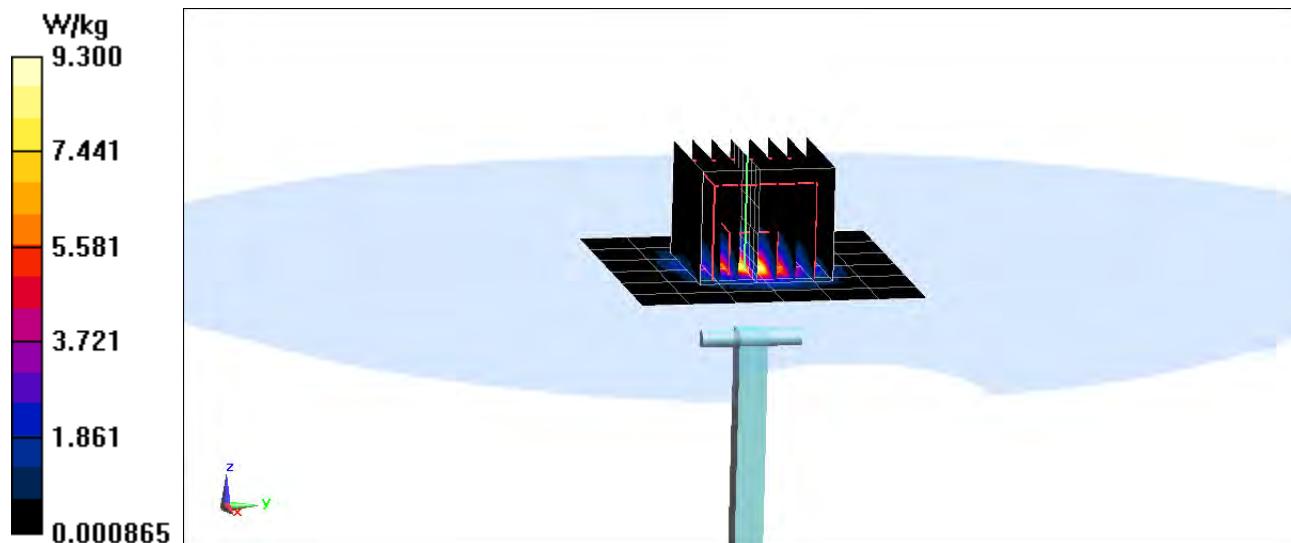

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750$ MHz; $\sigma = 0.961$ S/m; $\epsilon_r = 54.61$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2016; Ambient Temp: 20.7°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3319; ConvF(6.06, 6.06, 6.06); Calibrated: 3/18/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/14/2016

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.64 W/kg

SAR(1 g) = 1.79 W/kg

Deviation(1 g) = 6.17%

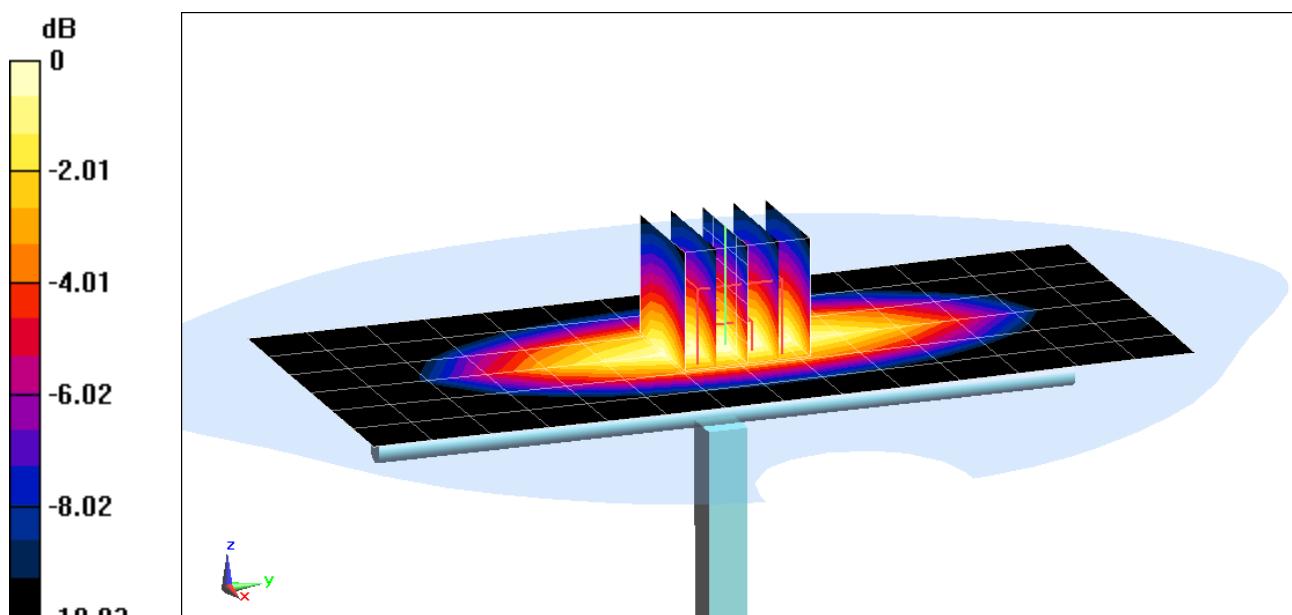

0 dB = 2.09 W/kg = 3.20 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.982 \text{ S/m}$; $\epsilon_r = 54.026$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-28-2016; Ambient Temp: 22.6°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7406; ConvF(9.35, 9.35, 9.35); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.05 W/kg

SAR(1 g) = 2.02 W/kg

Deviation(1 g) = 6.32%

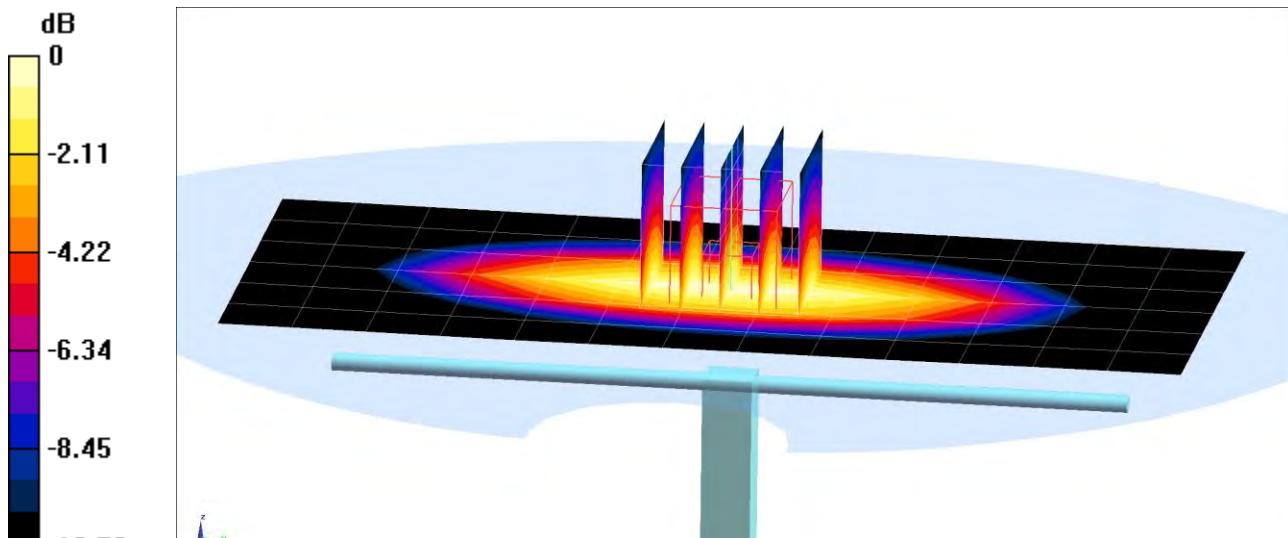

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.475$ S/m; $\epsilon_r = 51.402$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-27-2016; Ambient Temp: 22.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3318; ConvF(5.02, 5.02, 5.02); Calibrated: 2/19/2016;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/19/2016

Phantom: SAM with CRP v4.0; Type: QD000P40CD; Serial: TP:1800

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.47 W/kg

SAR(1 g) = 3.69 W/kg

Deviation(1 g) = -1.07%

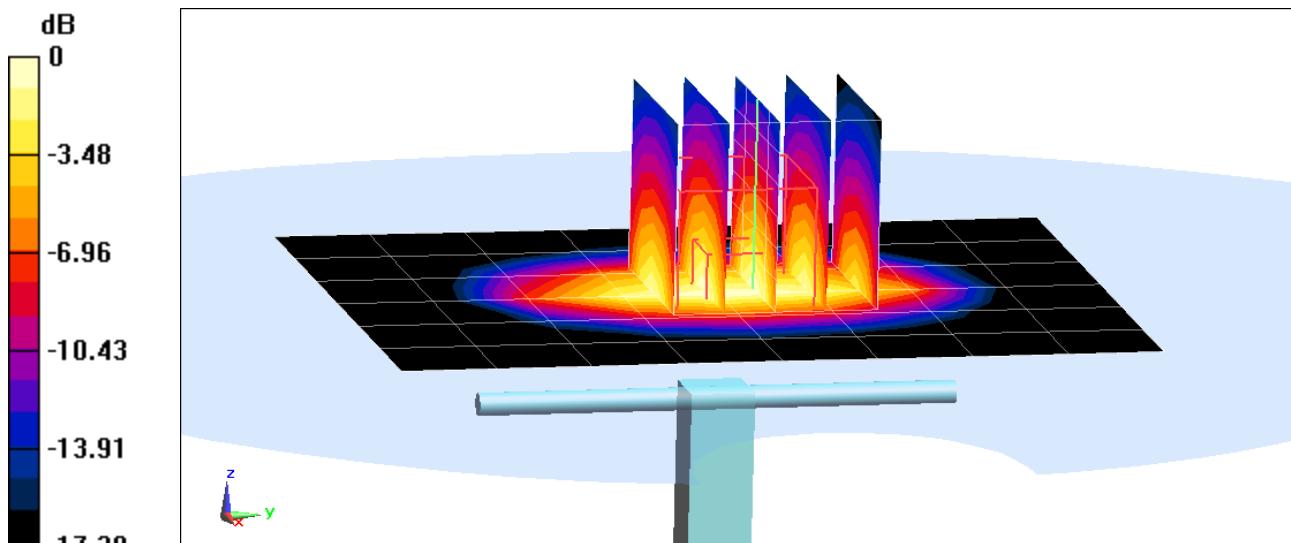

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.516$ S/m; $\epsilon_r = 51.306$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-06-2016; Ambient Temp: 22.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7406; ConvF(7.78, 7.78, 7.78); Calibrated: 4/19/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/14/2016

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.14 W/kg

SAR(1 g) = 3.94 W/kg

Deviation(1 g) = 5.63%

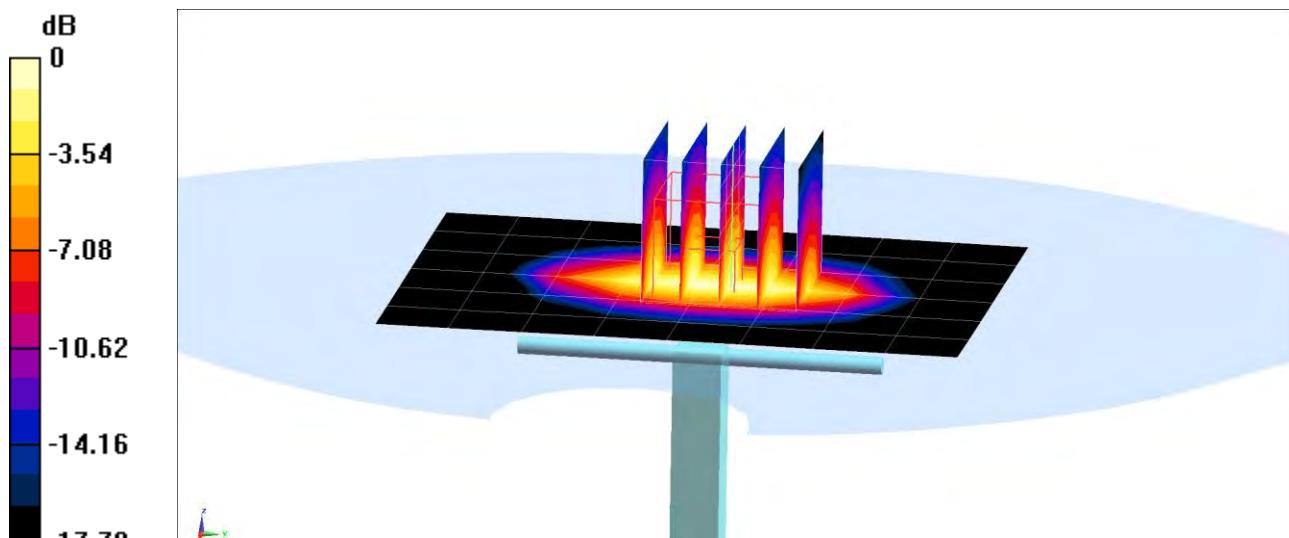

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used (interpolated):
 $f = 1900$ MHz; $\sigma = 1.58$ S/m; $\epsilon_r = 54.025$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2016; Ambient Temp: 21.4°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3319; ConvF(4.7, 4.7, 4.7); Calibrated: 3/18/2016;
Sensor-Surface: 3mm (Mechanical Surface Detection)


Electronics: DAE4 Sn1368; Calibrated: 3/14/2016
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

1900 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 7.38 W/kg
SAR(1 g) = 4.12 W/kg
Deviation(1 g) = 5.37%

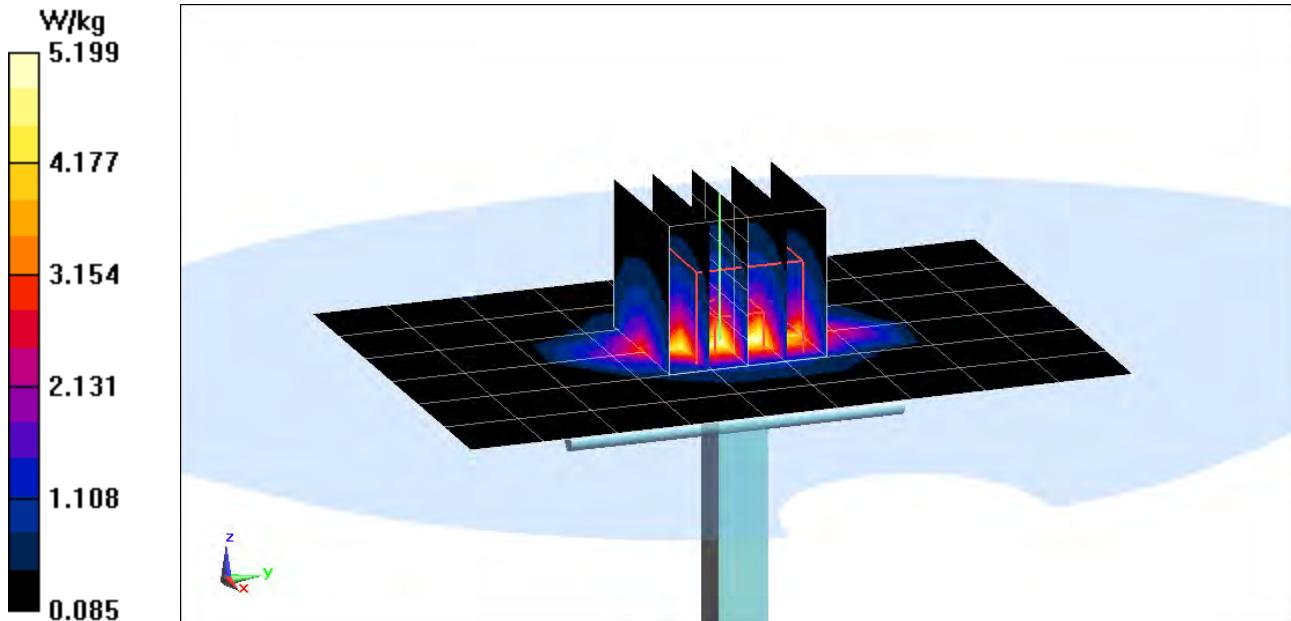

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 981

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$ MHz; $\sigma = 1.999$ S/m; $\epsilon_r = 51.171$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-25-2016; Ambient Temp: 22.4°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3334; ConvF(4.45, 4.45, 4.45); Calibrated: 11/17/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 11/11/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 5.42 W/kg

Deviation(1 g) = 6.69%

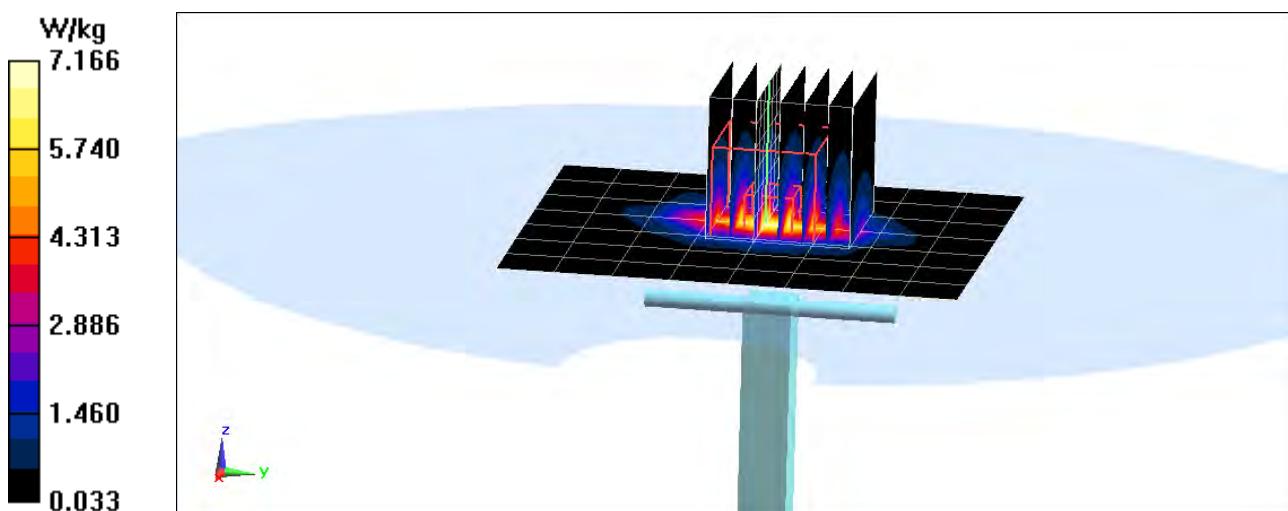

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Body Medium parameters used:

$f = 2600$ MHz; $\sigma = 2.215$ S/m; $\epsilon_r = 50.528$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2016; Ambient Temp: 22.6°C; Tissue Temp: 22.3°C

Probe: ES3DV3 - SN3334; ConvF(4.29, 4.29, 4.29); Calibrated: 11/17/2015;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1415; Calibrated: 11/11/2015

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.7 W/kg

SAR(1 g) = 5.74 W/kg

Deviation(1 g) = 5.32%

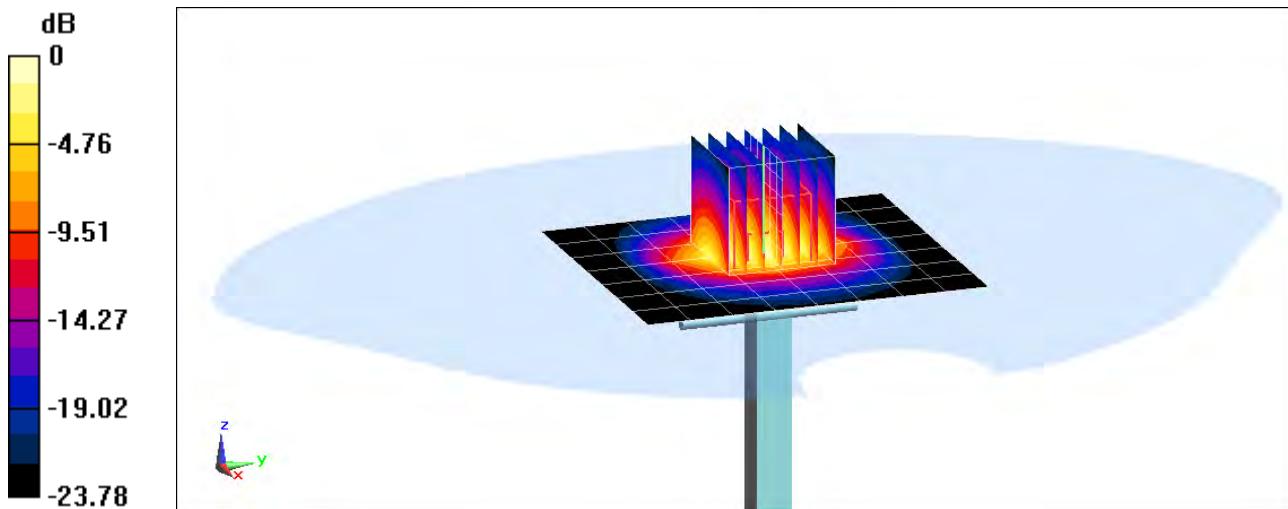

$$0 \text{ dB} = 7.65 \text{ W/kg} = 8.84 \text{ dBW/kg}$$

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5250$ MHz; $\sigma = 5.422$ S/m; $\epsilon_r = 47.644$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-22-2016; Ambient Temp: 22.6°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN3914; ConvF(4.32, 4.32, 4.32); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5250 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.5 W/kg

SAR(1 g) = 3.47 W/kg

Deviation(1 g) = -7.22%

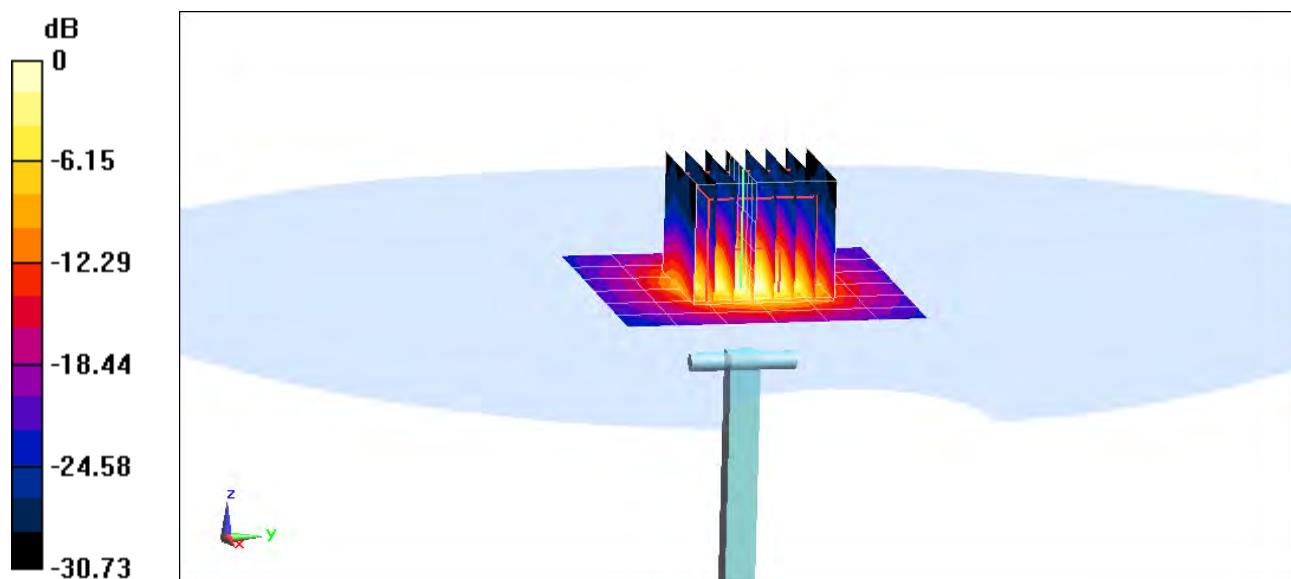

0 dB = 8.32 W/kg = 9.20 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5750$ MHz; $\sigma = 6.149$ S/m; $\epsilon_r = 47.25$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-13-2016; Ambient Temp: 21.8°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3914; ConvF(3.86, 3.86, 3.86); Calibrated: 2/22/2016;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/18/2016

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

5750 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.3 W/kg

SAR(1 g) = 3.49 W/kg

Deviation(1 g) = -7.43%

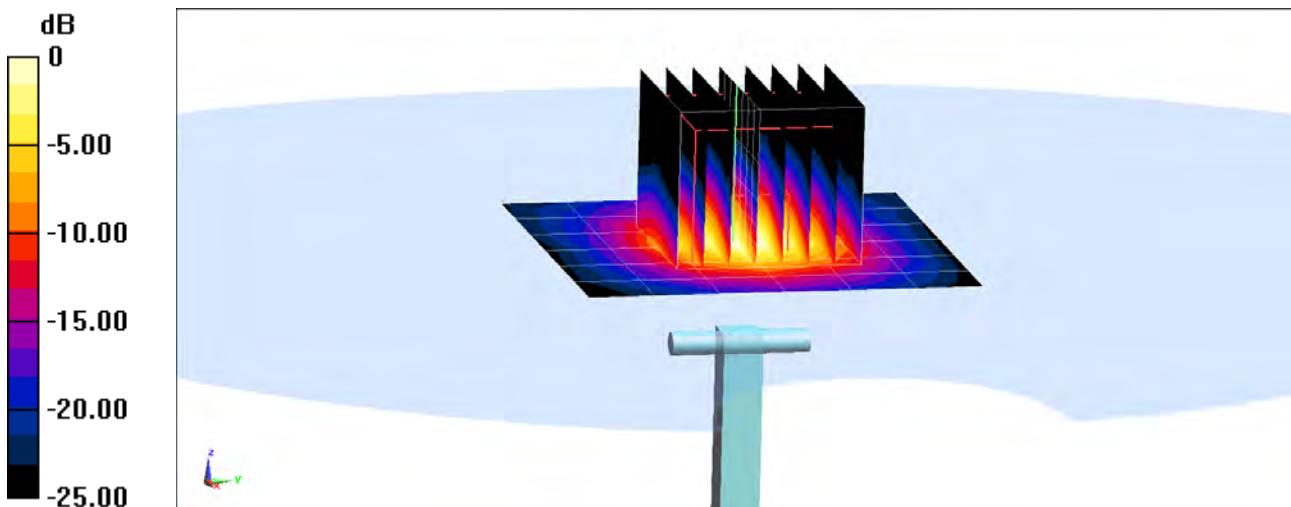

0 dB = 8.48 W/kg = 9.28 dBW/kg

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D750V3-1054_Mar16**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1054**

Calibration procedure(s) **QA CAL-05.v9**
 Calibration procedure for dipole validation kits above 700 MHz

B4
 03/30/2016

Calibration date: **March 16, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-15 (No. 217-02222)	Oct-16
Power sensor HP 8481A	US37292783	07-Oct-15 (No. 217-02222)	Oct-16
Power sensor HP 8481A	MY41092317	07-Oct-15 (No. 217-02223)	Oct-16
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe EX3DV4	SN: 7349	31-Dec-15 (No. EX3-7349_Dec15)	Dec-16
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100972	15-Jun-15 (in house check Jun-15)	In house check: Jun-18
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Jeton Kastrati** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Issued: March 16, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.9 \pm 6 %	0.91 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.22 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.41 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	54.7 \pm 6 %	0.98 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.18 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.56 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.44 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.68 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.2 Ω - 0.9 $j\Omega$
Return Loss	- 27.7 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.1 Ω - 2.3 $j\Omega$
Return Loss	- 32.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.035 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 08, 2011

DASY5 Validation Report for Head TSL

Date: 16.03.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1054

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.28, 10.28, 10.28); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom Type: QD000P49AA
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue EX-Probe/Pin=250 mW, d=15mm/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.13 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 3.14 W/kg

SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 2.78 W/kg

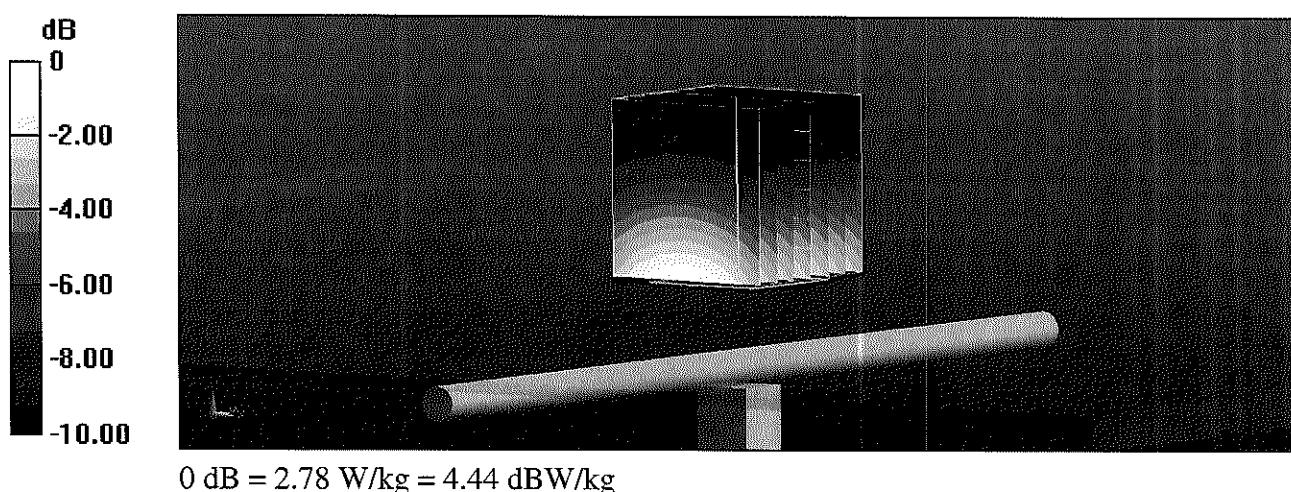

Impedance Measurement Plot for Head TSL

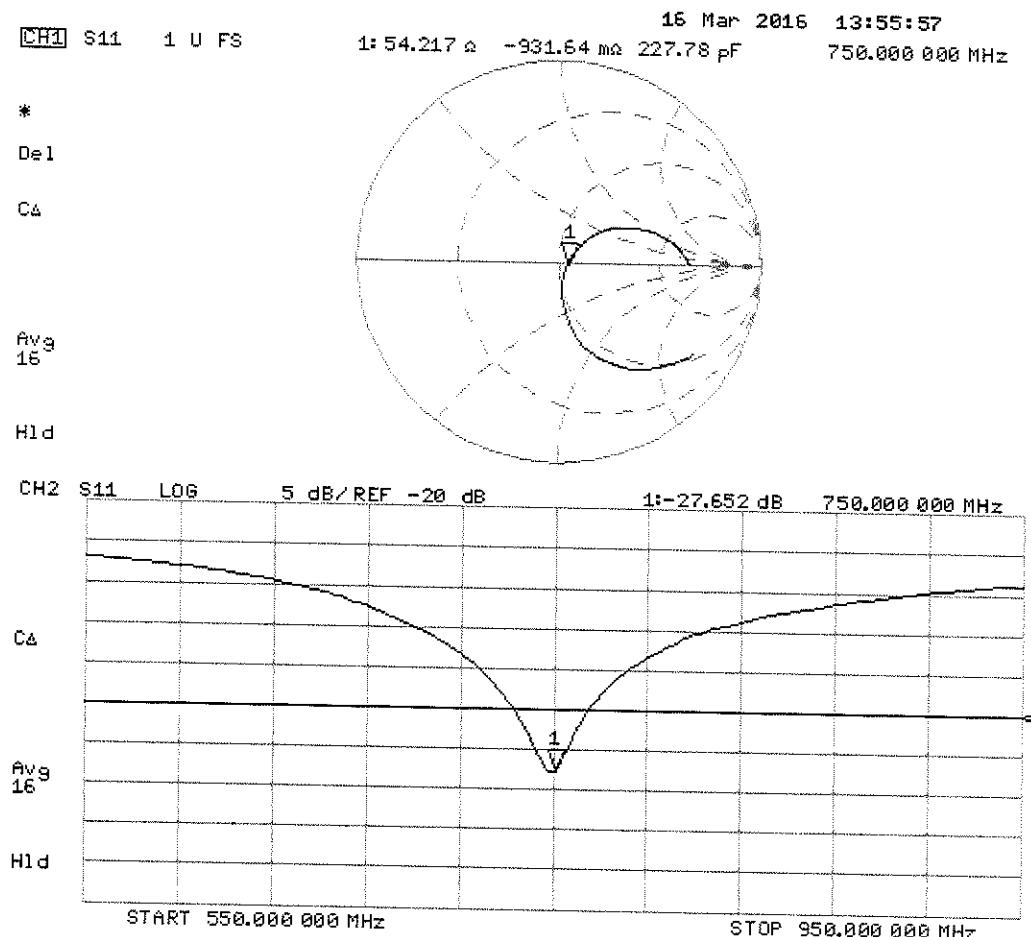

DASY5 Validation Report for Body TSL

Date: 16.03.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1054

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.99, 9.99, 9.99); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom Type: QD000P49AA
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue EX-Probe/Pin=250 mW, d=15mm/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.90 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.24 W/kg

SAR(1 g) = 2.18 W/kg; SAR(10 g) = 1.44 W/kg

Maximum value of SAR (measured) = 2.89 W/kg

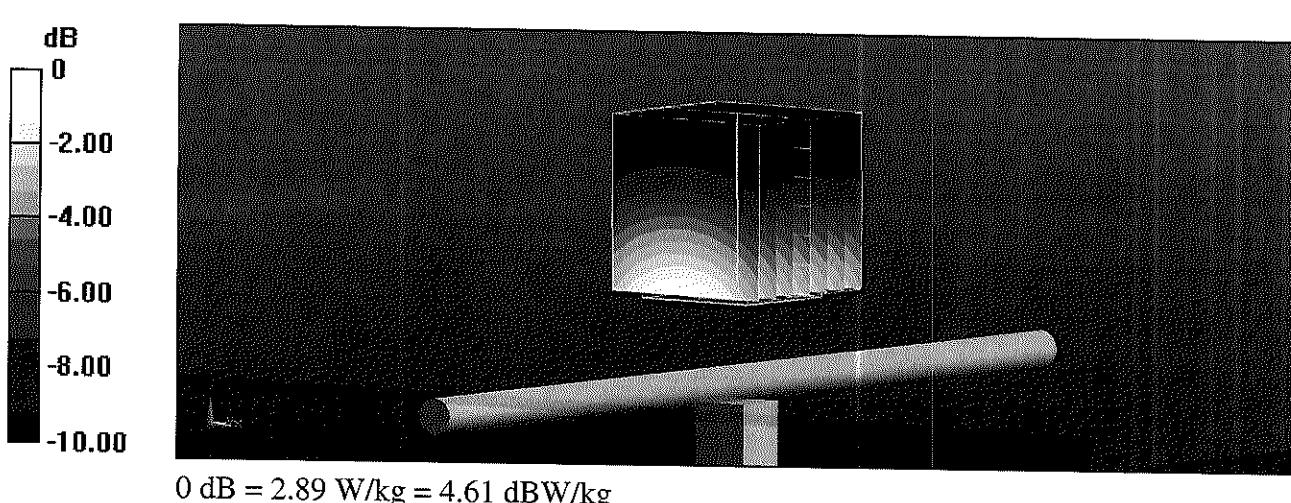

Impedance Measurement Plot for Body TSL

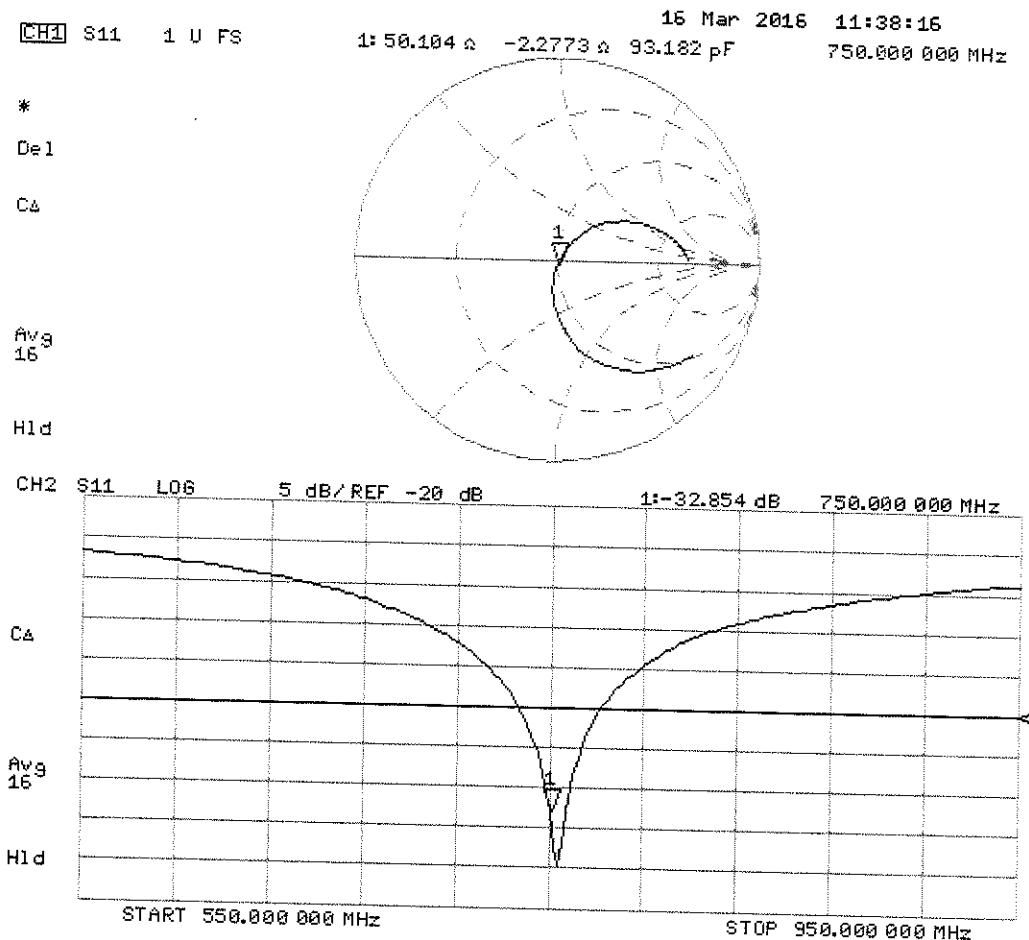



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d132_Jan16**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d132**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

BNV
1/28/2016

Calibration date: **January 20, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-15 (No. 217-02222)	Oct-16
Power sensor HP 8481A	US37292783	07-Oct-15 (No. 217-02222)	Oct-16
Power sensor HP 8481A	MY41092317	07-Oct-15 (No. 217-02228)	Oct-16
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe EX3DV4	SN: 7349	31-Dec-15 (No. EX3-7349_Dec15)	Dec-16
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100972	15-Jun-15 (in house check Jun-15)	In house check: Jun-18
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: January 20, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SCS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	$dx, dy, dz = 5 \text{ mm}$	
Frequency	$835 \text{ MHz} \pm 1 \text{ MHz}$	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	$(22.0 \pm 0.2) \text{ °C}$	$42.0 \pm 6 \text{ %}$	$0.93 \text{ mho/m} \pm 6 \text{ %}$
Head TSL temperature change during test	$< 0.5 \text{ °C}$	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.42 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.47 W/kg $\pm 17.0 \text{ % (k=2)}$
SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.57 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.17 W/kg $\pm 16.5 \text{ % (k=2)}$

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	$(22.0 \pm 0.2) \text{ °C}$	$55.2 \pm 6 \text{ %}$	$1.01 \text{ mho/m} \pm 6 \text{ %}$
Body TSL temperature change during test	$< 0.5 \text{ °C}$	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.49 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.66 W/kg $\pm 17.0 \text{ % (k=2)}$
SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.63 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.37 W/kg $\pm 16.5 \text{ % (k=2)}$

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.2 Ω - 2.7 $j\Omega$
Return Loss	- 30.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.8 Ω - 4.9 $j\Omega$
Return Loss	- 25.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.388 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

DASY5 Validation Report for Head TSL

Date: 20.01.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.83, 9.83, 9.83); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue EX-Probe/Pin=250 mW, d=15mm/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.94 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.57 W/kg

Maximum value of SAR (measured) = 3.24 W/kg

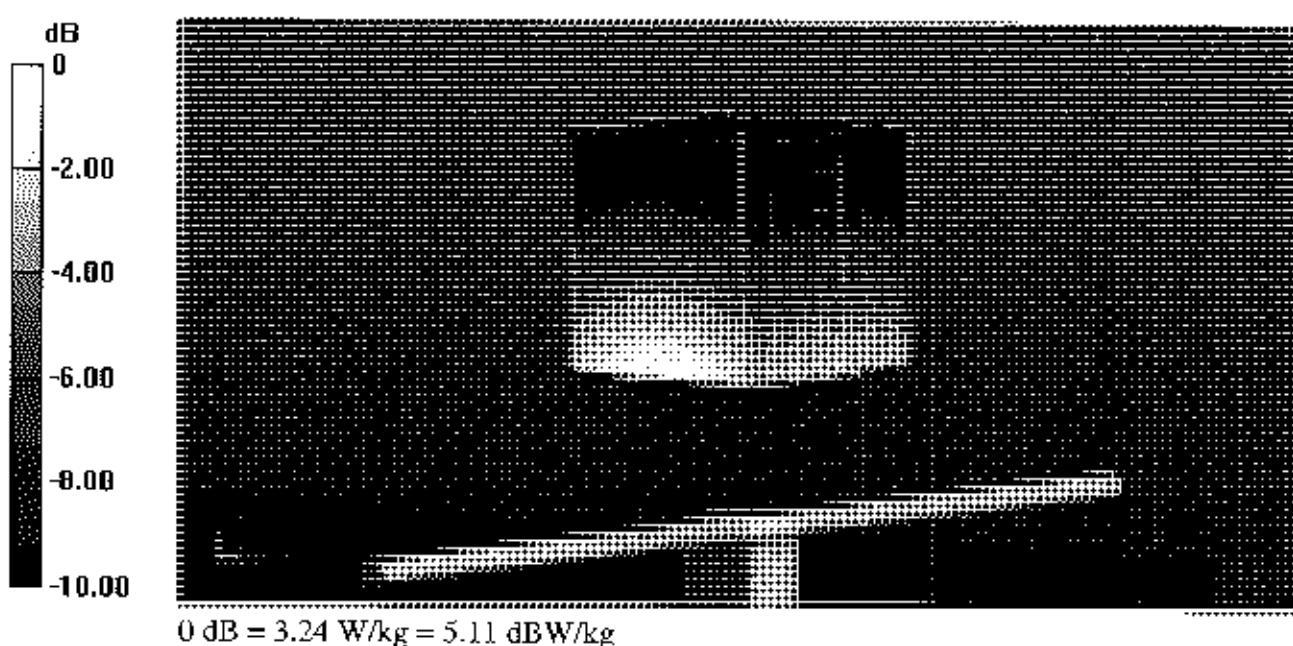

Impedance Measurement Plot for Head TSL

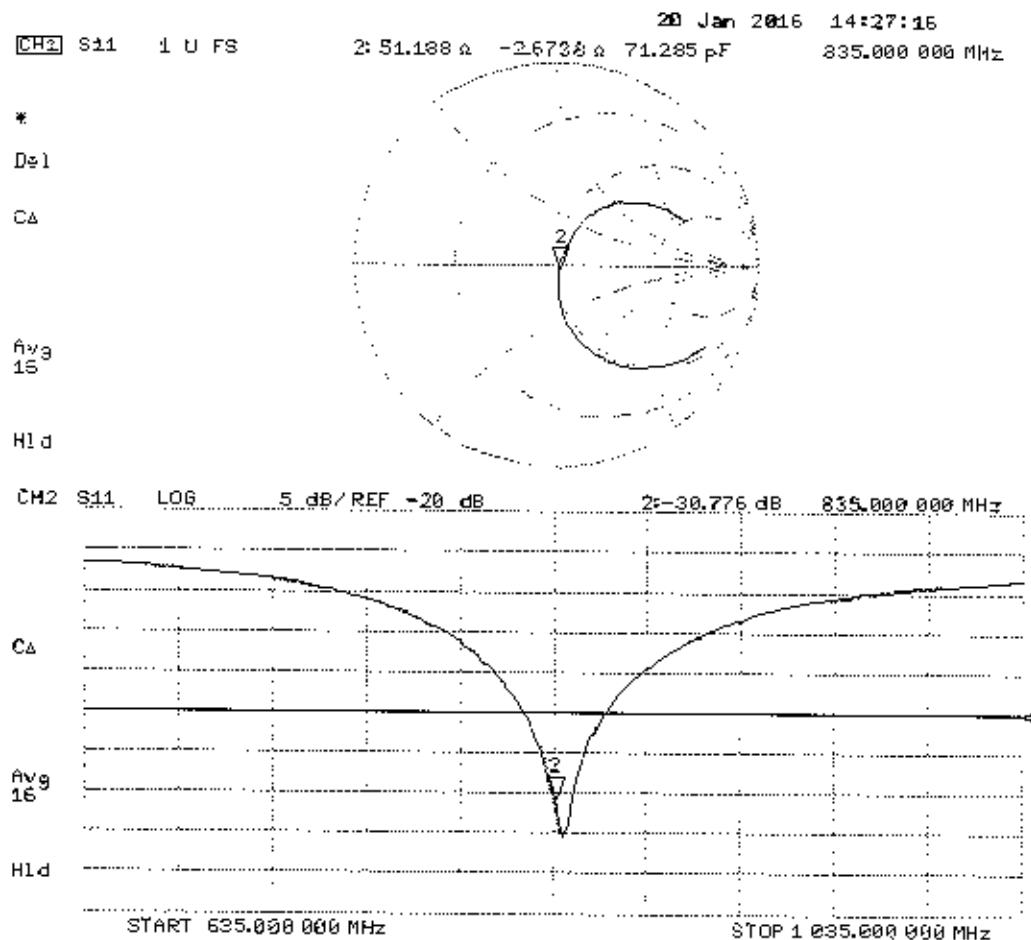

DASY5 Validation Report for Body TSL

Date: 20.01.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.01 \text{ S/m}$; $\epsilon_r = 55.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.73, 9.73, 9.73); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue EX-Probe/Pin=250 mW, d=15mm/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 60.29 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.49 W/kg; SAR(10 g) = 1.63 W/kg

Maximum value of SAR (measured) = 3.29 W/kg

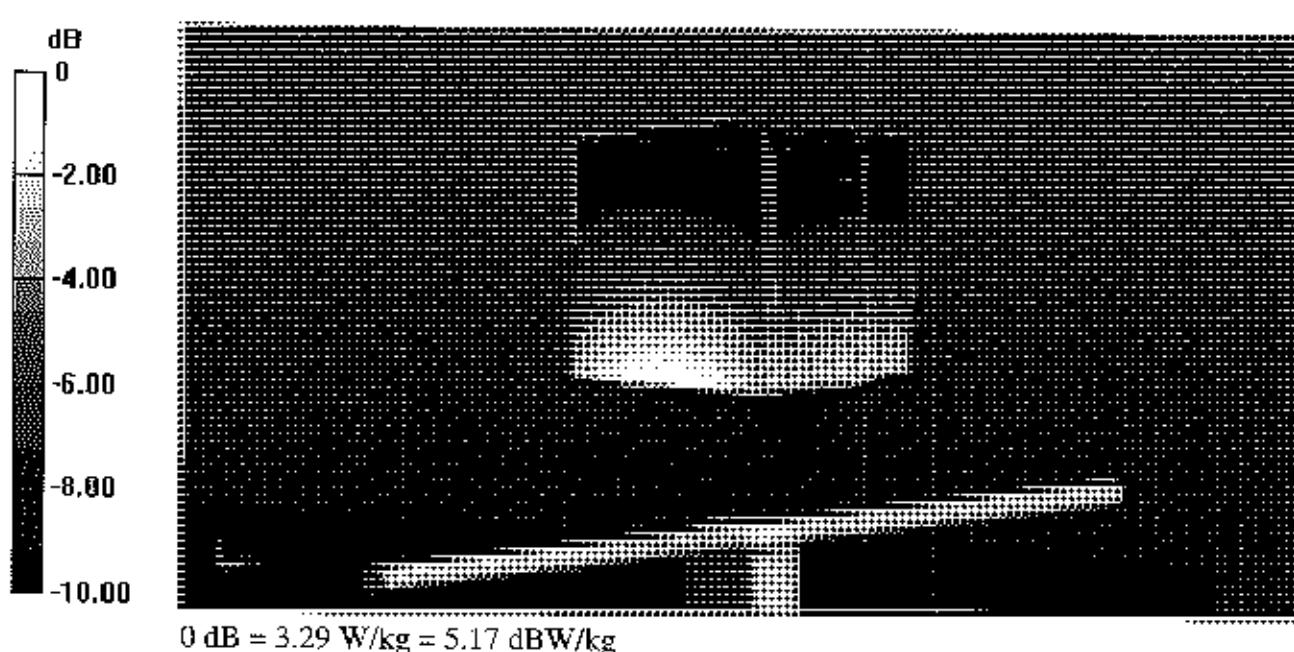

Impedance Measurement Plot for Body TSL

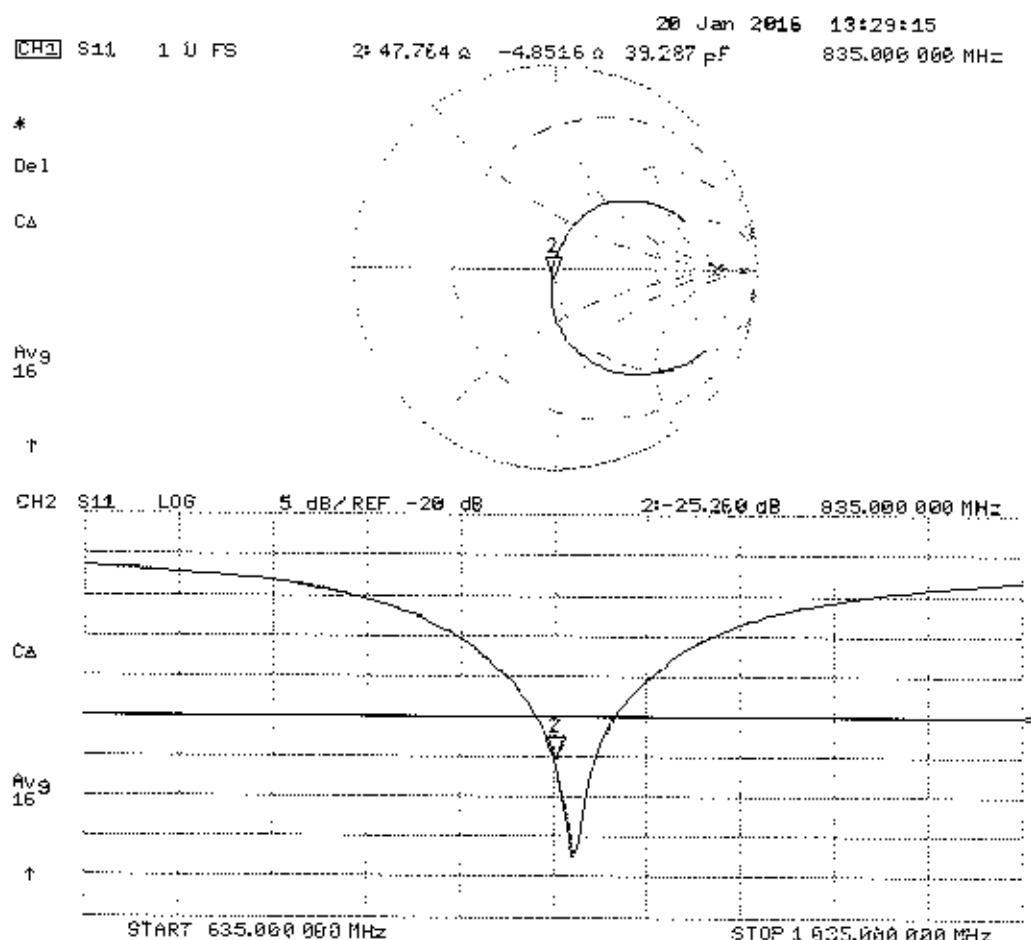



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1765V2-1008_May16**

CALIBRATION CERTIFICATE

Object **D1765V2 - SN:1008**

Calibration procedure(s) **QA CAL-05.v9**
 Calibration procedure for dipole validation kits above 700 MHz

*BNV
 05/23/16*

Calibration date: **May 11, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	31-Dec-15 (No. EX3-7349_Dec15)	Dec-16
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Michael Weber** Function **Laboratory Technician**

Signature

M. Weber

Approved by: **Katja Pokovic** Technical Manager

K. Pokovic

Issued: May 17, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.8 \pm 6 %	1.36 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.7 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.81 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.3 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.50 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	53.8 \pm 6 %	1.50 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.30 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.3 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.94 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.8 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.8 Ω - 6.0 $j\Omega$
Return Loss	- 24.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.8 Ω - 6.8 $j\Omega$
Return Loss	- 21.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.211 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 06, 2005

DASY5 Validation Report for Head TSL

Date: 11.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1765 MHz; Type: D1765V2; Serial: D1765V2 - SN: 1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.54, 8.54, 8.54); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.4 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 9.1 W/kg; SAR(10 g) = 4.81 W/kg

Maximum value of SAR (measured) = 13.7 W/kg

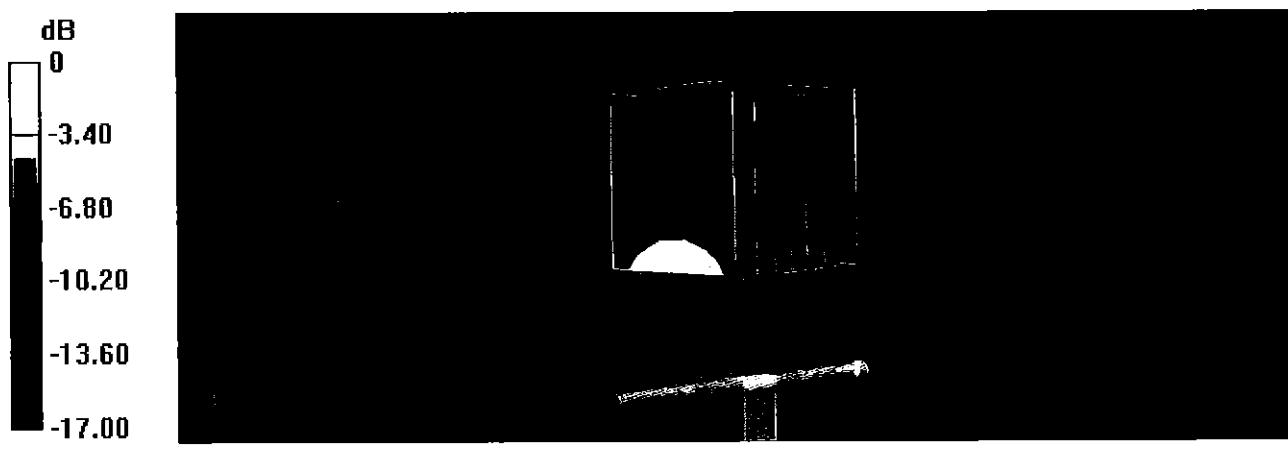

Impedance Measurement Plot for Head TSL

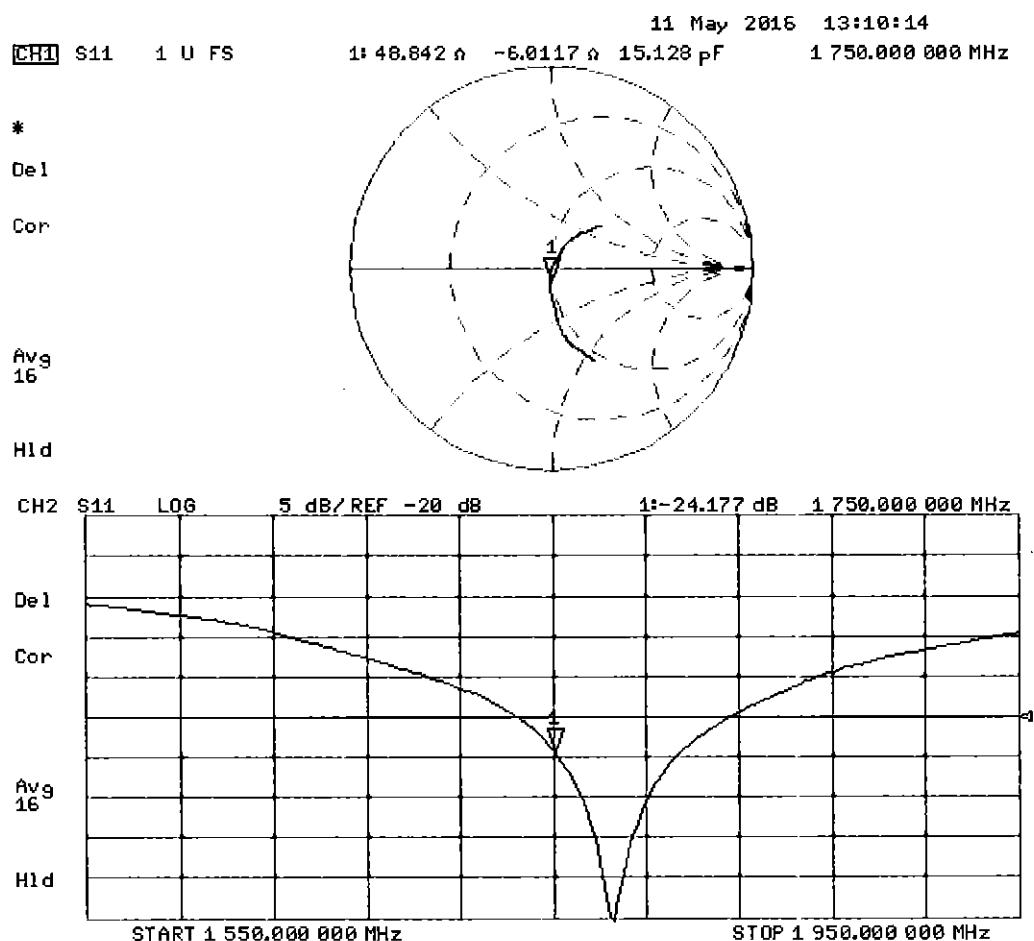

DASY5 Validation Report for Body TSL

Date: 11.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1765 MHz; Type: D1765V2; Serial: D1765V2 - SN: 1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.5$ S/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.25, 8.25, 8.25); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.9 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.3 W/kg; SAR(10 g) = 4.94 W/kg

Maximum value of SAR (measured) = 14.0 W/kg

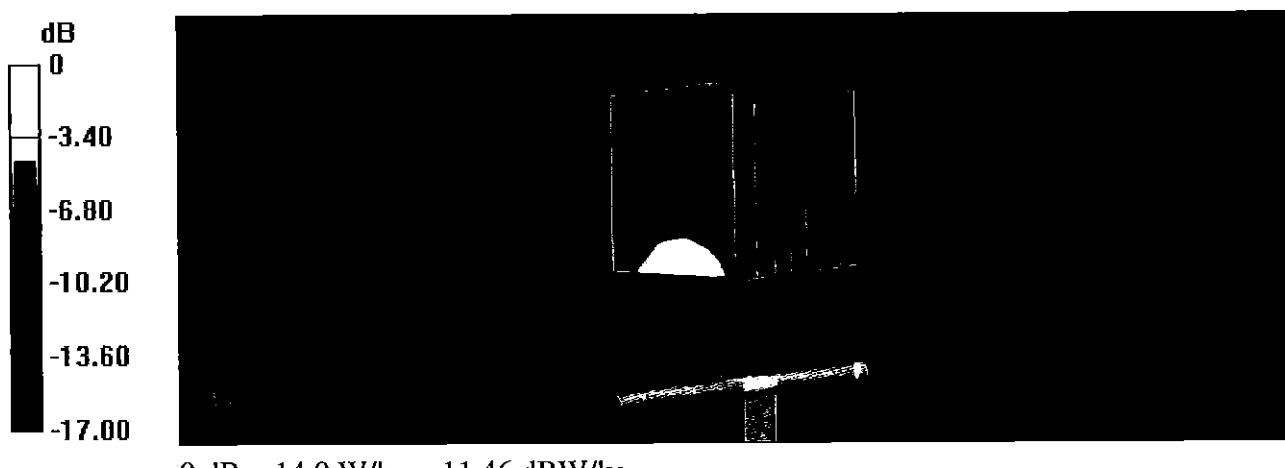

Impedance Measurement Plot for Body TSL

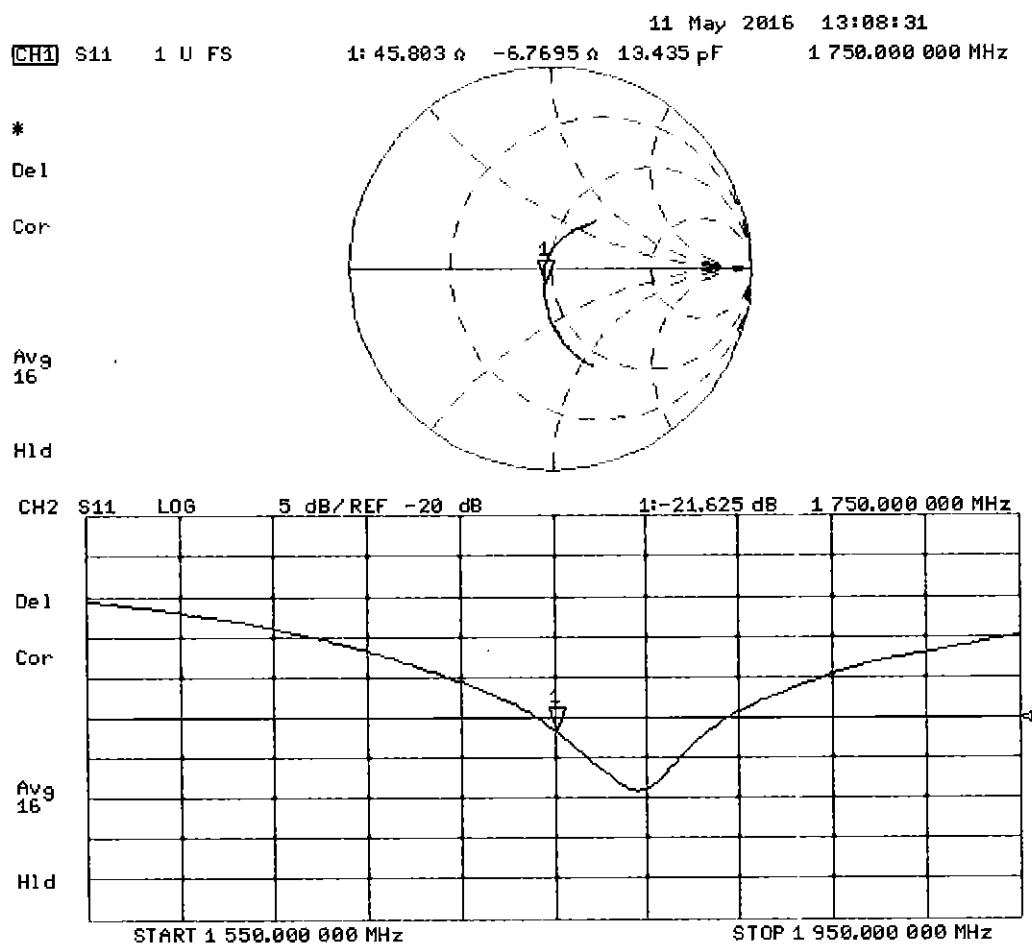



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1750V2-1148_May16**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN: 1148**

Calibration procedure(s) **QA CAL-05.v9**
 Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **May 09, 2016**

BN ✓
 5/17/2016

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	31-Dec-15 (No. EX3-7349_Dec15)	Dec-16
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by:	Name Michael Weber	Function Laboratory Technician	Signature <i>M. Weber</i>
Approved by:	Katja Pokovic	Technical Manager	<i>K. Pokovic</i>

Issued: May 11, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.7 \pm 6 %	1.36 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.03 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.2 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.78 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.1 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	53.8 \pm 6 %	1.50 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.30 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.1 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.93 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.7 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.9 Ω - 0.7 $j\Omega$
Return Loss	- 43.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.2 Ω - 1.4 $j\Omega$
Return Loss	- 27.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.221 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 30, 2014

DASY5 Validation Report for Head TSL

Date: 09.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1148

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.54, 8.54, 8.54); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.5 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 9.03 W/kg; SAR(10 g) = 4.78 W/kg

Maximum value of SAR (measured) = 13.6 W/kg

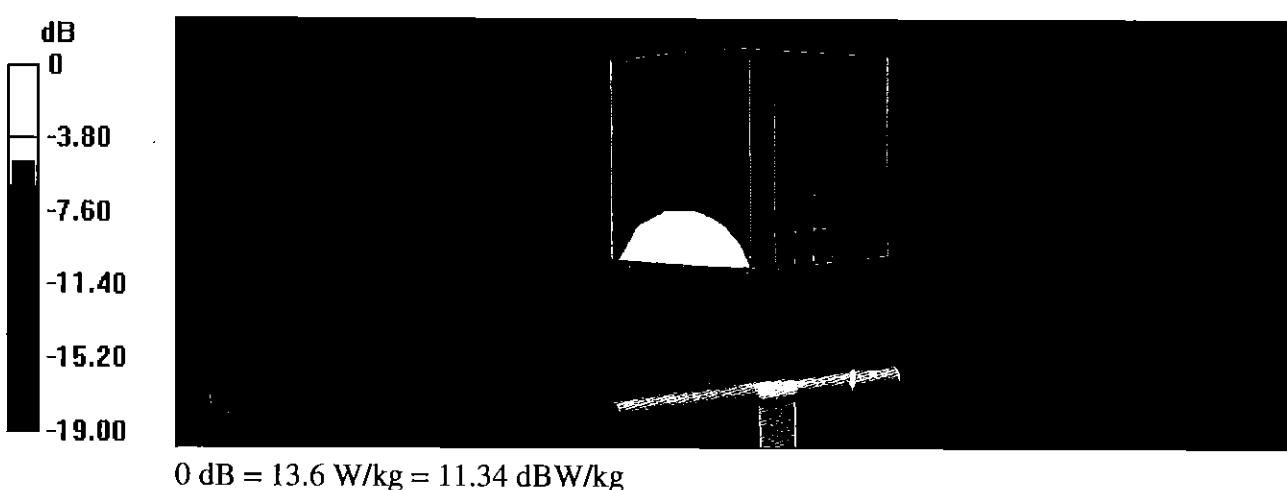

Impedance Measurement Plot for Head TSL

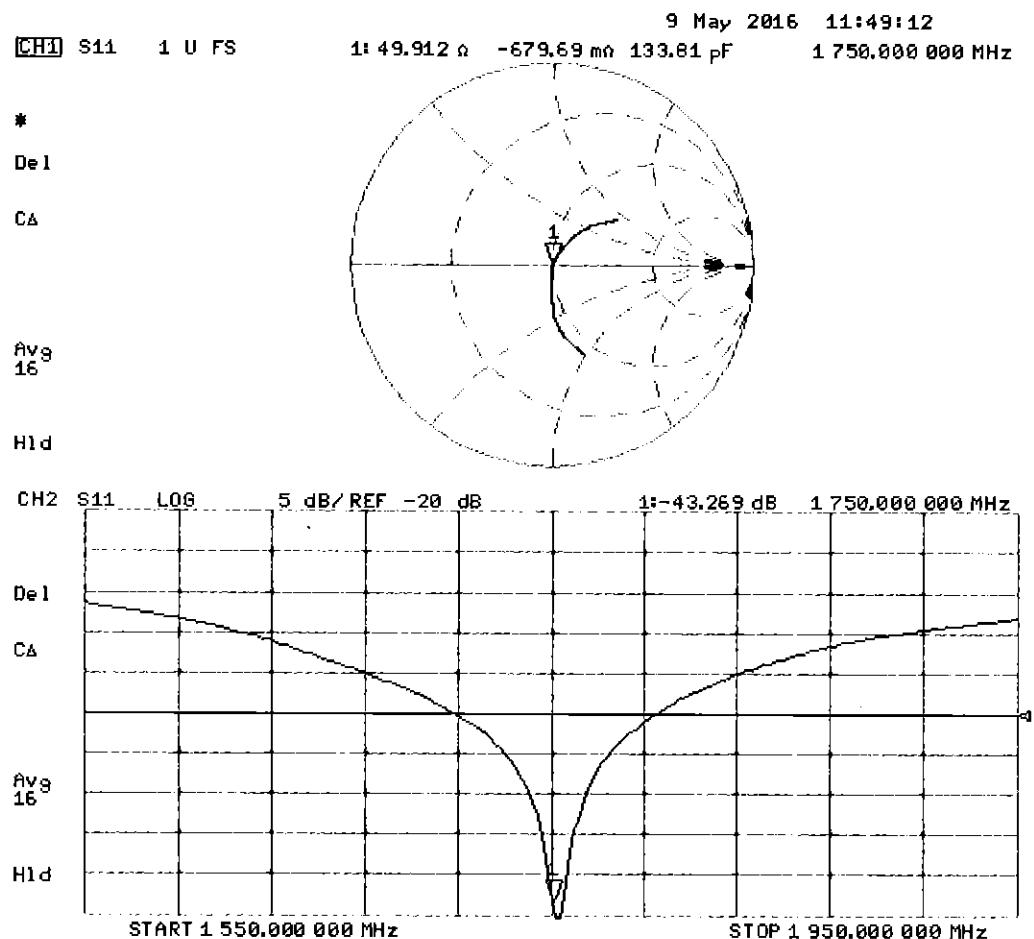

DASY5 Validation Report for Body TSL

Date: 09.05.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1148

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.5$ S/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.25, 8.25, 8.25); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.0 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 9.3 W/kg; SAR(10 g) = 4.93 W/kg

Maximum value of SAR (measured) = 14.1 W/kg

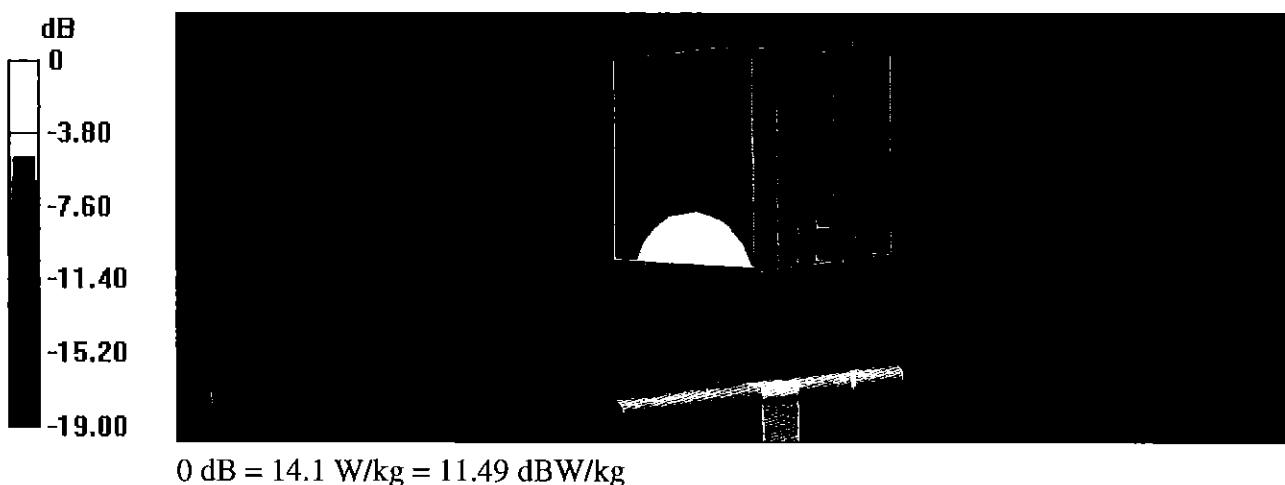

Impedance Measurement Plot for Body TSL

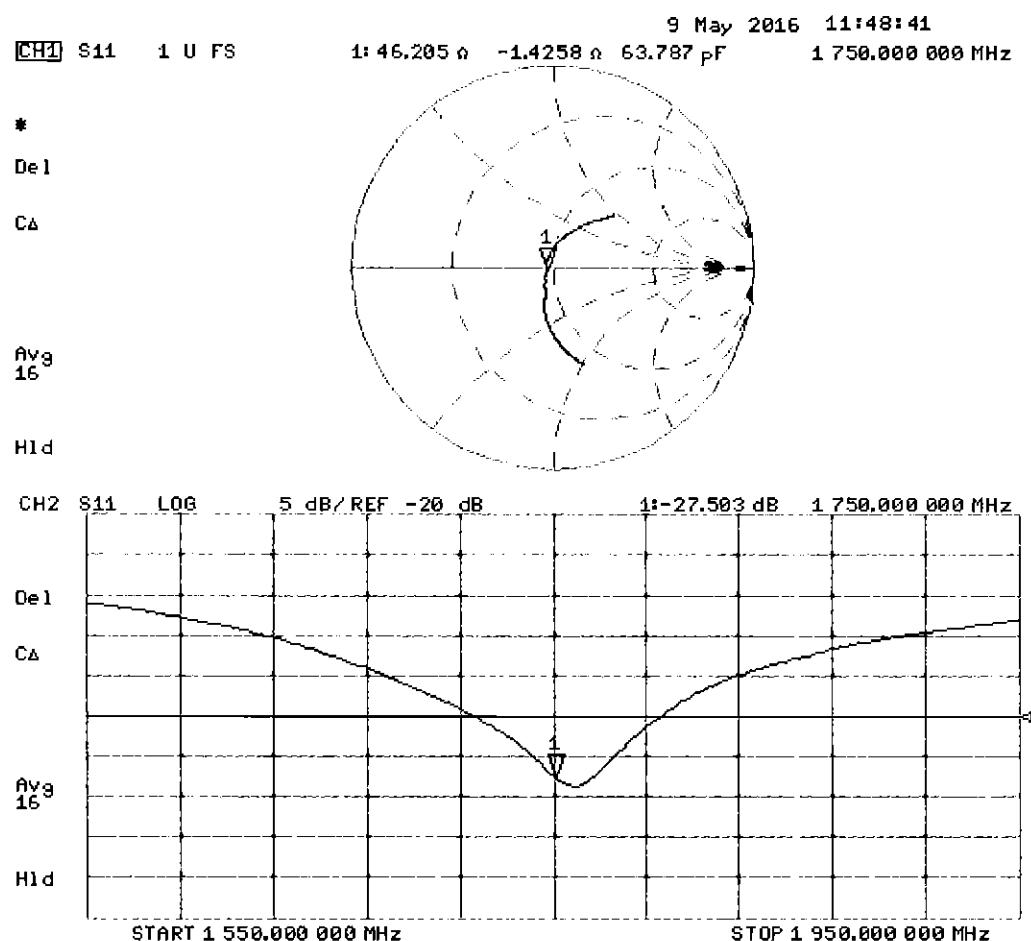



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1900V2-5d148_Feb16**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d148**

Calibration procedure(s) **QA CAL-05.v9**
 Calibration procedure for dipole validation kits above 700 MHz

BN ✓
 3/1/2016

Calibration date: **February 19, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-15 (No. 217-02222)	Oct-16
Power sensor HP 8481A	US37292783	07-Oct-15 (No. 217-02222)	Oct-16
Power sensor HP 8481A	MY41092317	07-Oct-15 (No. 217-02223)	Oct-16
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe EX3DV4	SN: 7349	31-Dec-15 (No. EX3-7349_Dec15)	Dec-16
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100972	15-Jun-15 (in house check Jun-15)	In house check: Jun-18
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by:	Name	Function	Signature
	Michael Weber	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: February 19, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	41.3 \pm 6 %	1.40 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.91 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	39.9 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.18 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.8 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	52.9 \pm 6 %	1.52 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.95 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	39.7 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.0 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$53.2 \Omega + 6.6 \text{ j}\Omega$
Return Loss	- 23.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$49.1 \Omega + 7.8 \text{ j}\Omega$
Return Loss	- 22.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.198 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 11, 2011

DASY5 Validation Report for Head TSL

Date: 19.02.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d148

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.2, 8.2, 8.2); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.9 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 9.91 W/kg; SAR(10 g) = 5.18 W/kg

Maximum value of SAR (measured) = 15.2 W/kg

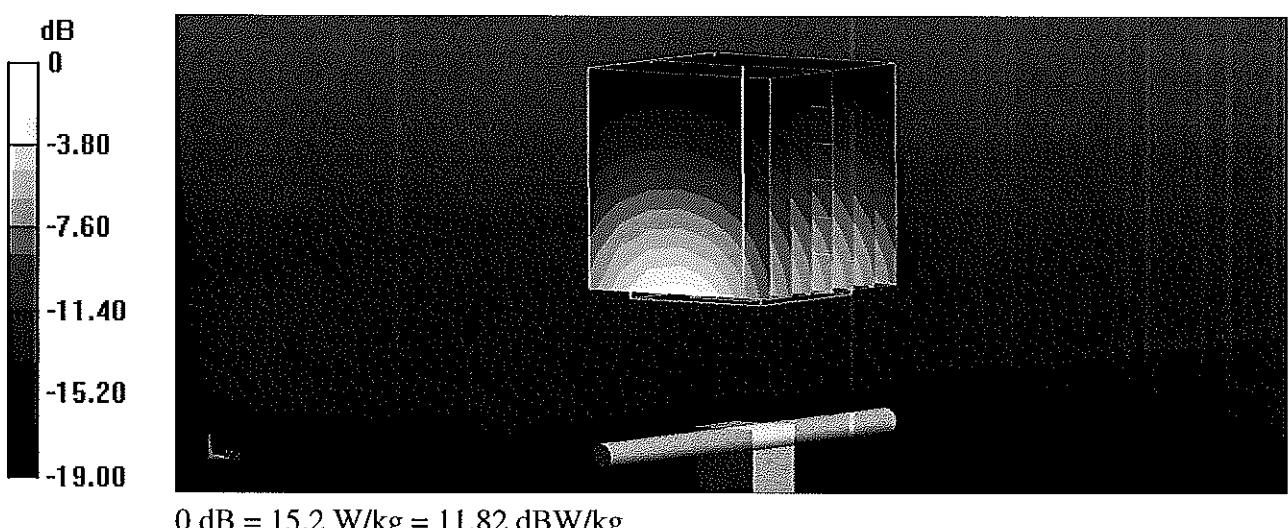

Impedance Measurement Plot for Head TSL

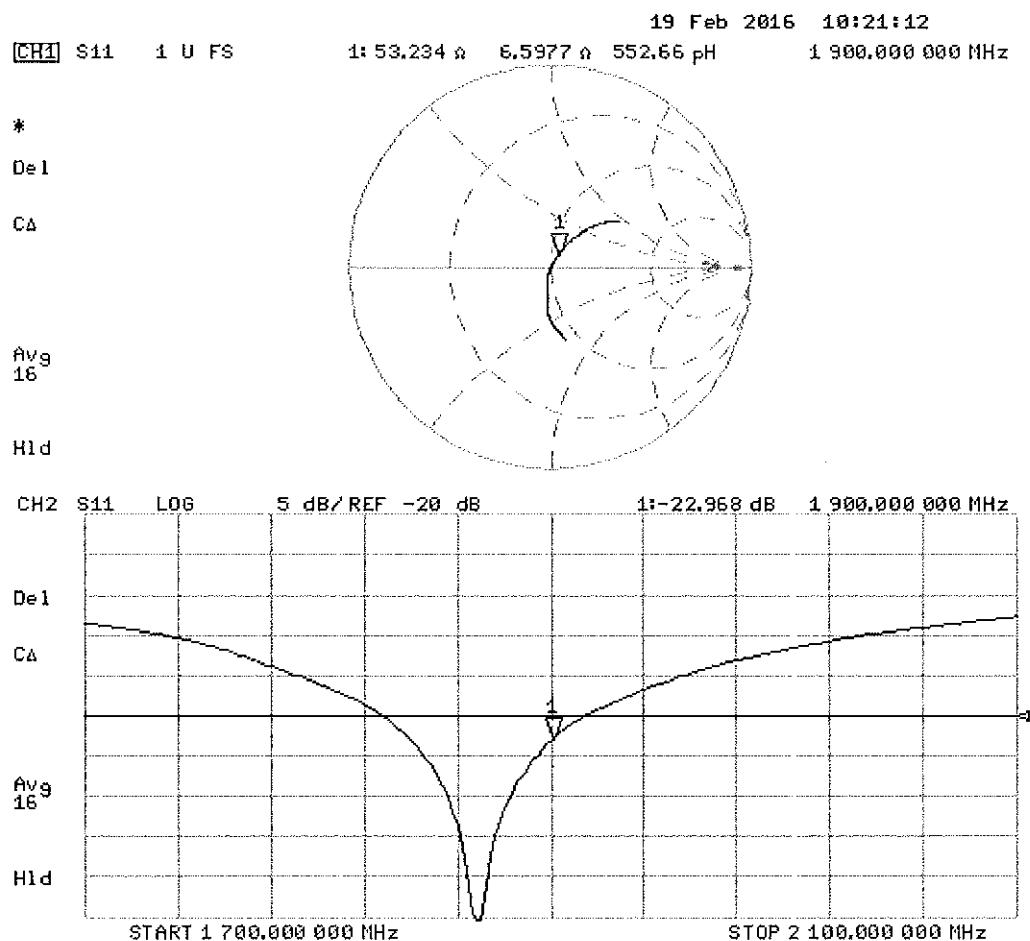

DASY5 Validation Report for Body TSL

Date: 19.02.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d148

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.03, 8.03, 8.03); Calibrated: 31.12.2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.8 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 17.5 W/kg

SAR(1 g) = 9.95 W/kg; SAR(10 g) = 5.25 W/kg

Maximum value of SAR (measured) = 15.0 W/kg

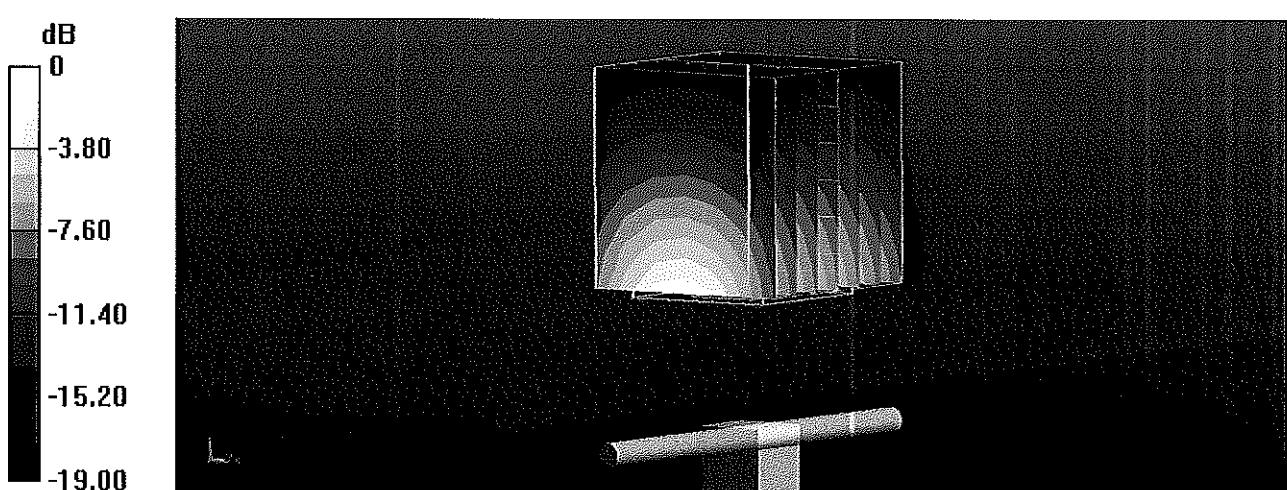

Impedance Measurement Plot for Body TSL

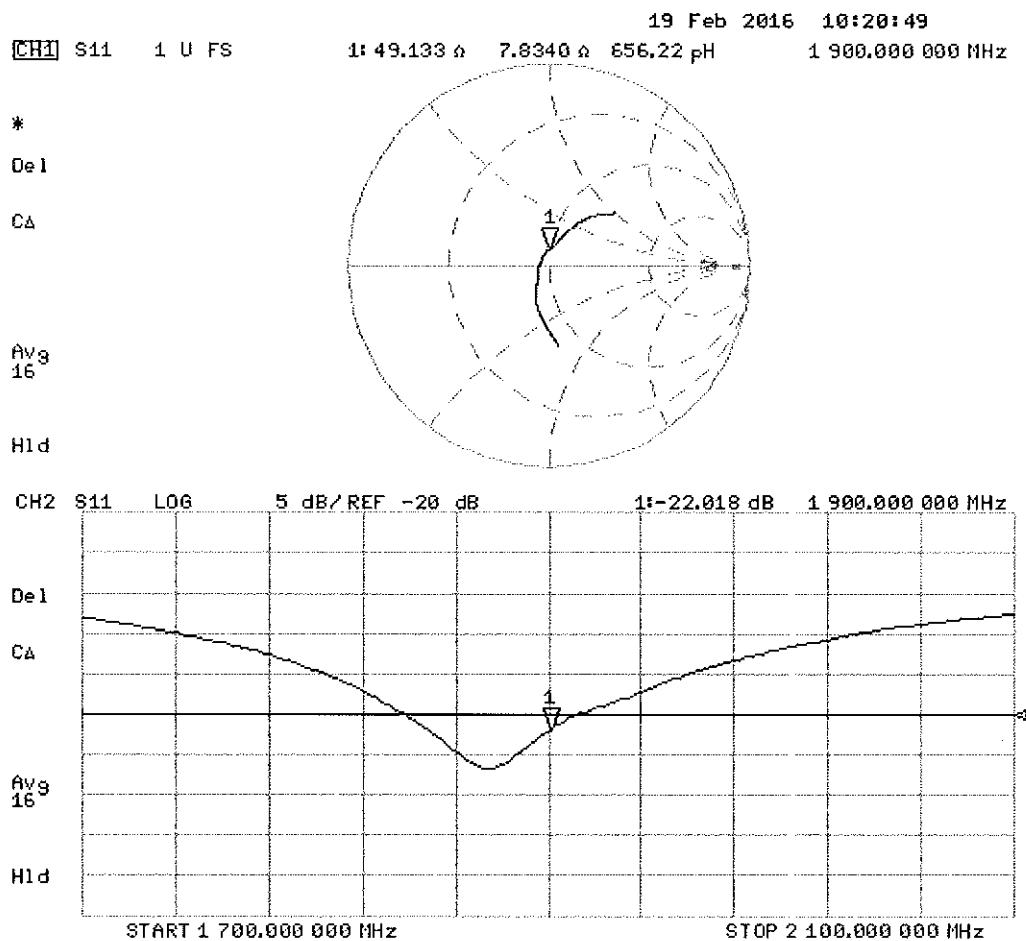



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2450V2-981_Jul16**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:981**

Calibration procedure(s) **QA CAL-05.v9**
 Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **July 25, 2016**

VPN
 8/9/16

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7349_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: Name **Michael Weber** Function **Laboratory Technician**

Signature

Approved by: Name **Katja Pokovic** Function **Technical Manager**

Issued: July 27, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	38.0 \pm 6 %	1.86 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.8 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.26 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.7 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	51.8 \pm 6 %	2.03 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.8 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.04 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.8 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$53.2 \Omega + 3.4 j\Omega$
Return Loss	- 26.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$50.2 \Omega + 4.5 j\Omega$
Return Loss	- 27.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.162 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 30, 2014

DASY5 Validation Report for Head TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:981

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.72, 7.72, 7.72); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.8 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 27.4 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.26 W/kg

Maximum value of SAR (measured) = 22.5 W/kg

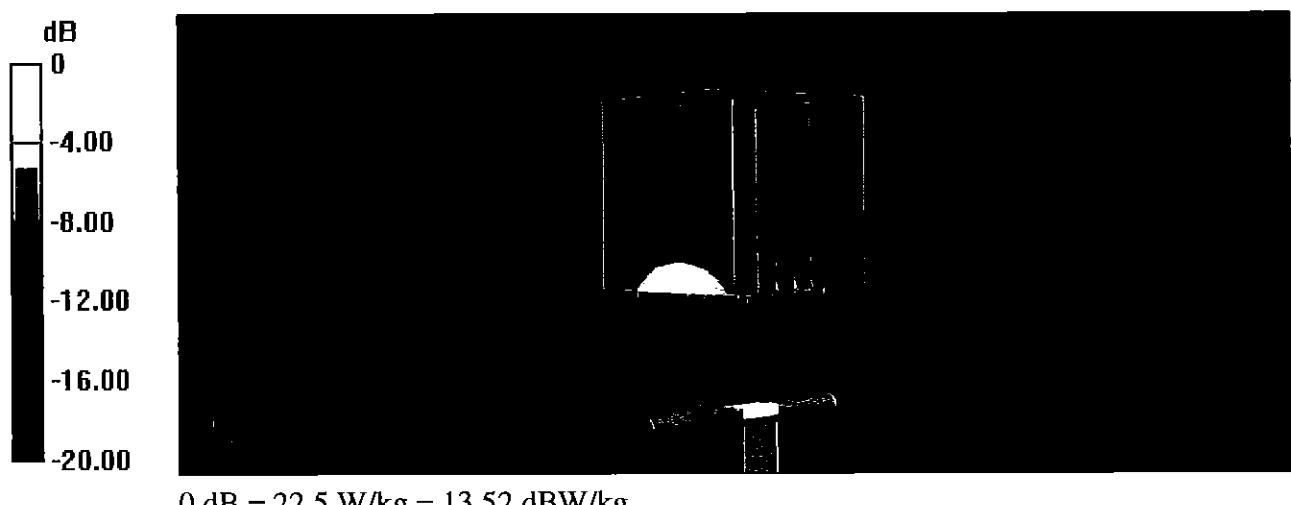

Impedance Measurement Plot for Head TSL

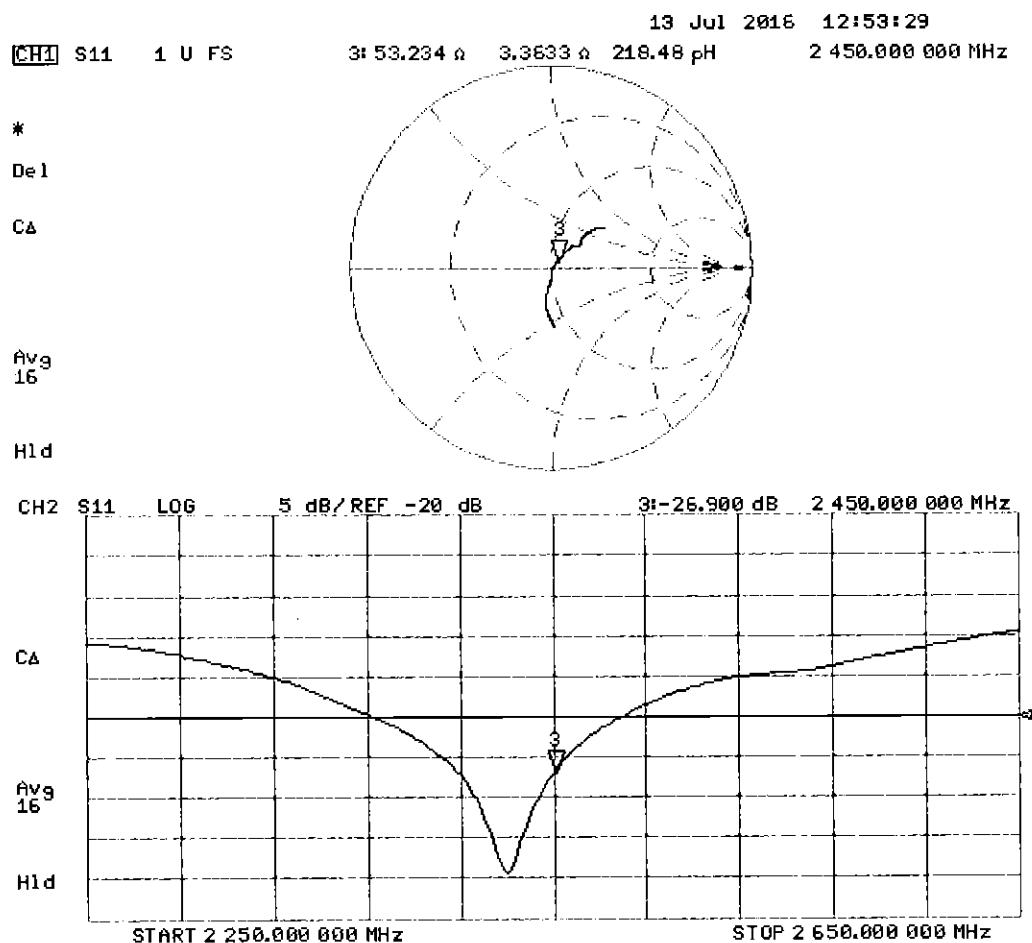

DASY5 Validation Report for Body TSL

Date: 25.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:981

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.1 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 26.0 W/kg

SAR(1 g) = 13 W/kg; SAR(10 g) = 6.04 W/kg

Maximum value of SAR (measured) = 21.4 W/kg



Impedance Measurement Plot for Body TSL

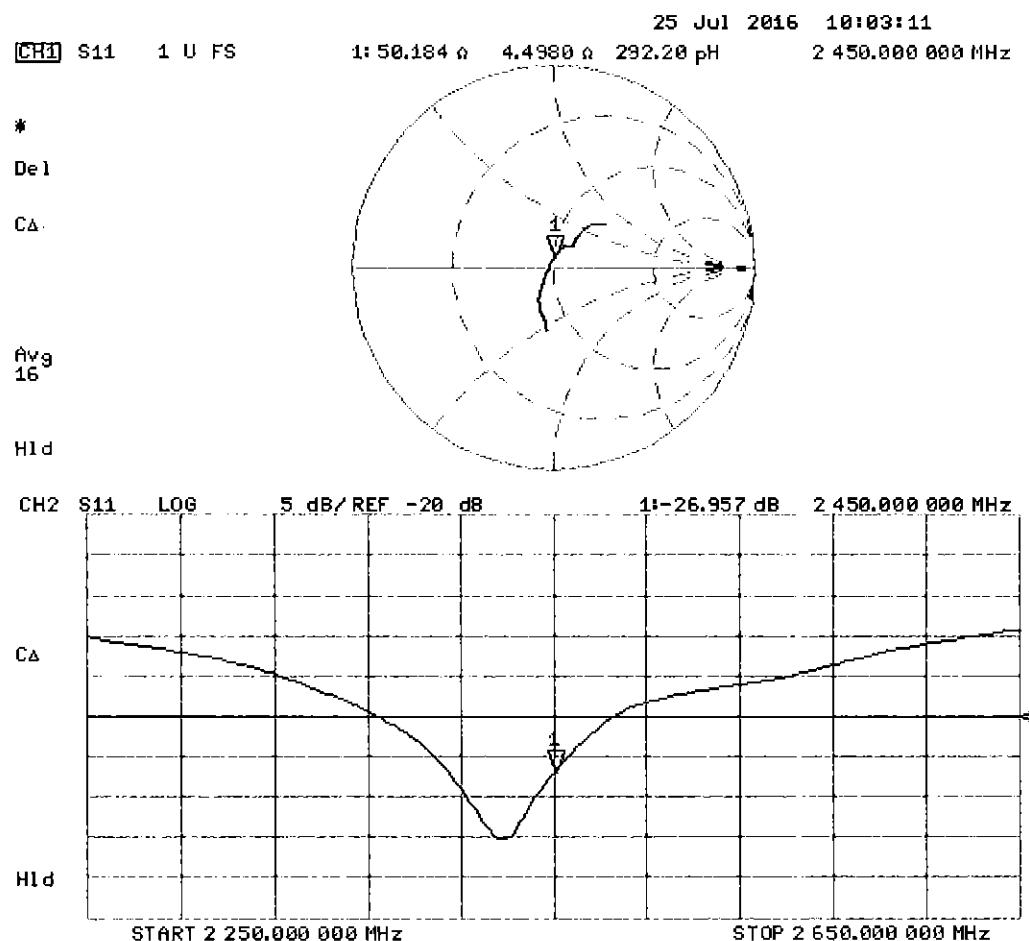



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Accreditation No.: **SCS 0108**

Certificate No: **D2600V2-1126_Jul16**

CALIBRATION CERTIFICATE

Object **D2600V2 - SN: 1126**

Calibration procedure(s) **QA CAL-05.v9**
 Calibration procedure for dipole validation kits above 700 MHz

✓ PN
 8/9/16

Calibration date: **July 25, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7349_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by:	Name	Function	Signature
	Michael Weber	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.5 ± 6 %	2.02 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	56.3 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.1 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.5	2.16 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.4 ± 6 %	2.20 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.8 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	54.5 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.12 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.3 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.0 Ω - 7.4 $j\Omega$
Return Loss	- 22.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.4 Ω - 6.2 $j\Omega$
Return Loss	- 21.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.152 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 22, 2015

DASY5 Validation Report for Head TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1126

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 37.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.56, 7.56, 7.56); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 116.2 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 30.6 W/kg

SAR(1 g) = 14.4 W/kg; SAR(10 g) = 6.36 W/kg

Maximum value of SAR (measured) = 24.6 W/kg

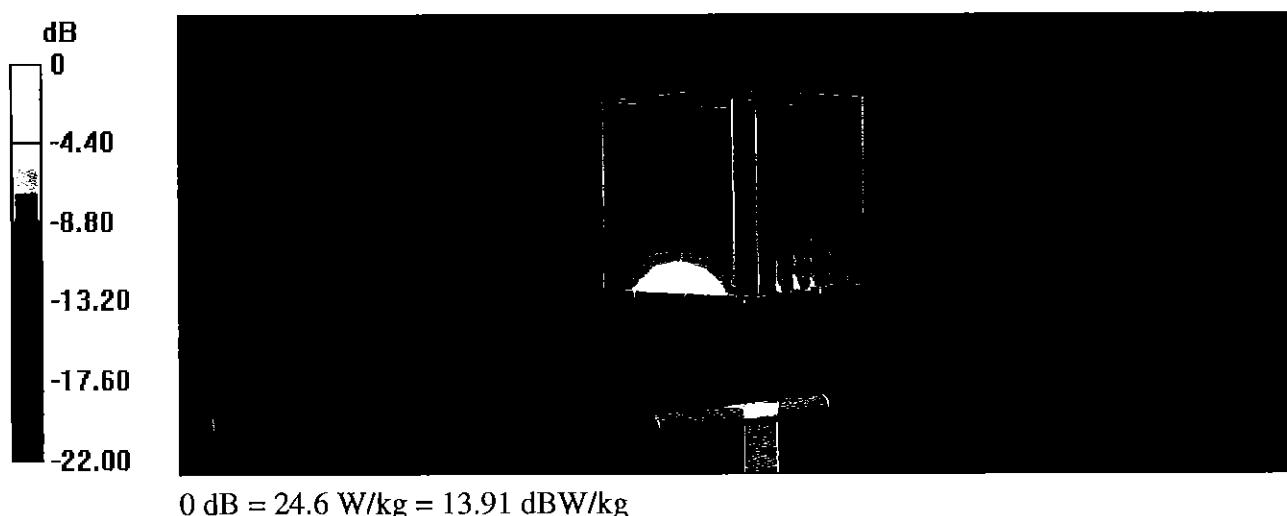

Impedance Measurement Plot for Head TSL

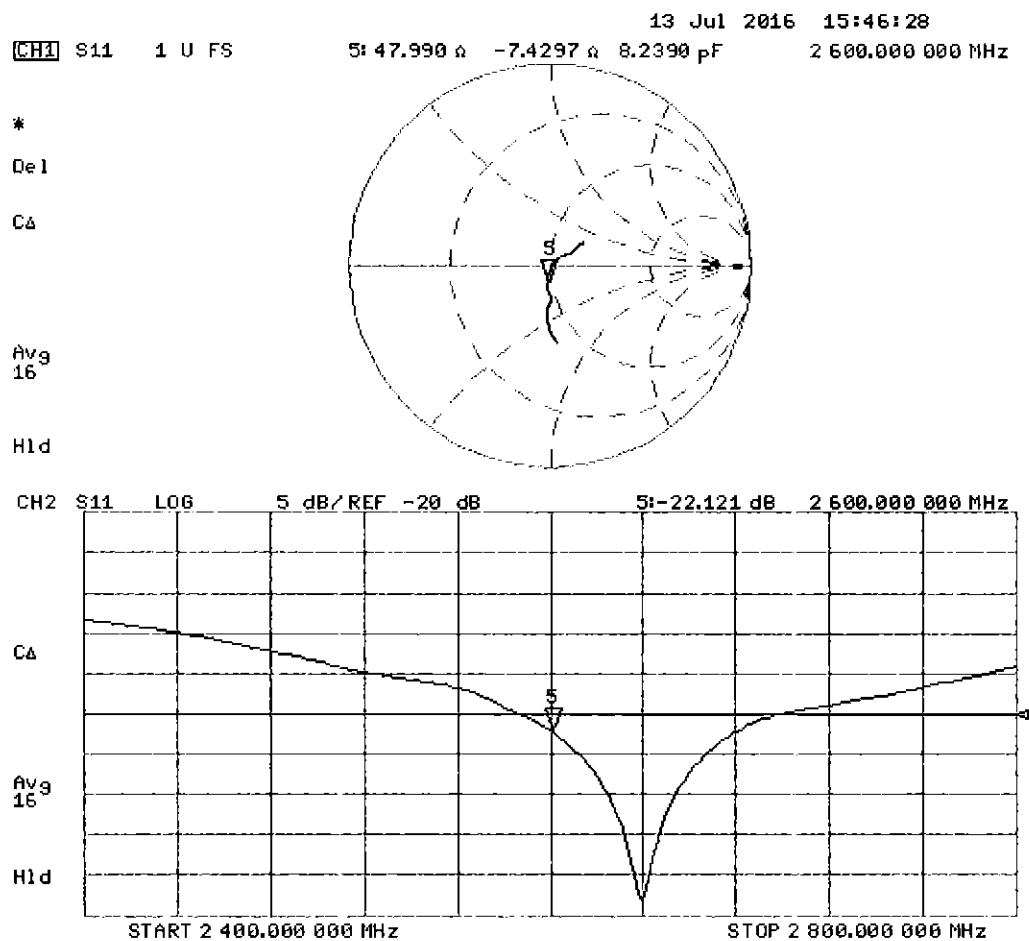

DASY5 Validation Report for Body TSL

Date: 22.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1126

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.2$ S/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.48, 7.48, 7.48); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.5 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 28.5 W/kg

SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.12 W/kg

Maximum value of SAR (measured) = 23.0 W/kg

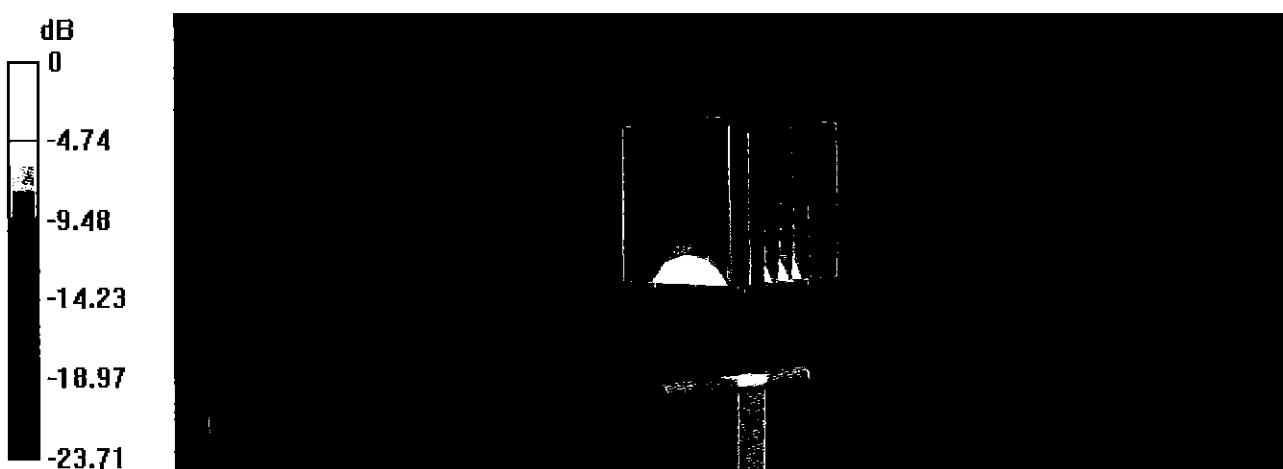

Impedance Measurement Plot for Body TSL

