

FCC LTE REPORT

Class II Permissive Change

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Date of Issue:
September 18, 2018

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-1809-FC066-R2

FCC ID: A3LSMJ610FN

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-J415FN/DS
Additional Model(s): SM-J415FN
EUT Type: Mobile Phone
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §22, §2


| Mode (MHz) | Tx Frequency (MHz) | Emission Designator | Modulation | ERP | |
|-------------------|--------------------|---------------------|------------|----------------|------------------|
| | | | | Max. Power (W) | Max. Power (dBm) |
| LTE – Band5 (1.4) | 824.7 – 848.3 | 1M10G7D | QPSK | 0.053 | 17.23 |
| | | 1M10W7D | 16QAM | 0.033 | 15.23 |
| LTE – Band5 (3) | 825.5 – 847.5 | 2M71G7D | QPSK | 0.052 | 17.12 |
| | | 2M69W7D | 16QAM | 0.036 | 15.58 |
| LTE – Band5 (5) | 826.5 – 846.5 | 4M50G7D | QPSK | 0.051 | 17.10 |
| | | 4M48W7D | 16QAM | 0.034 | 15.38 |
| LTE – Band5 (10) | 829.0 – 844.0 | 8M97G7D | QPSK | 0.056 | 17.50 |
| | | 8M97W7D | 16QAM | 0.037 | 15.63 |

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center



Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

| TEST REPORT NO. | DATE | DESCRIPTION |
|----------------------|--------------------|---|
| HCT-RF-1809-FC066 | September 14, 2018 | - First Approval Report |
| HCT-RF-1809-FC066-R1 | September 17, 2018 | - Removed the reuse data - Added the spot check data |
| HCT-RF-1809-FC066-R2 | September 18, 2018 | - Revised the test summary on page 17 |
| | | |

Table of Contents

| | |
|--|----|
| 1. GENERAL INFORMATION | 4 |
| 2. INTRODUCTION | 5 |
| 2.1. DESCRIPTION OF EUT | 5 |
| 2.2. MEASURING INSTRUMENT CALIBRATION | 5 |
| 2.3. TEST FACILITY | 5 |
| 3. DESCRIPTION OF TESTS | 6 |
| 3.1 TEST PROCEDURE | 6 |
| 3.2 RADIATED POWER | 7 |
| 3.3 RADIATED SPURIOUS EMISSIONS | 8 |
| 3.4 OCCUPIED BANDWIDTH. | 9 |
| 3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL..... | 10 |
| 3.6 BAND EDGE | 11 |
| 3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE | 12 |
| 3.8 WORST CASE(RADIATED TEST) | 13 |
| 3.9 WORST CASE(CONDUCTED TEST) | 14 |
| 4. LIST OF TEST EQUIPMENT | 15 |
| 5. MEASUREMENT UNCERTAINTY | 16 |
| 6. SUMMARY OF TEST RESULTS | 17 |
| 7. SAMPLE CALCULATION | 18 |
| 8. TEST RESULT (E.R.P & Radiated Spurious Emission) | 20 |
| 8.1 EFFECTIVE RADIATED POWER..... | 20 |
| 8.2 RADIATED SPURIOUS EMISSIONS | 20 |
| 9. ANNEX A_ TEST SETUP PHOTO..... | 21 |

MEASUREMENT REPORT

1. GENERAL INFORMATION

| | |
|-----------------------------|---|
| Applicant Name: | SAMSUNG Electronics Co., Ltd. |
| Address: | 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea |
| FCC ID: | A3LSMJ610FN |
| Application Type: | Certification |
| FCC Classification: | PCS Licensed Transmitter Held to Ear (PCE) |
| FCC Rule Part(s): | §22, §2 |
| EUT Type: | Mobile Phone |
| Model(s): | SM-J415FN/DS |
| Additional Model(s): | SM-J415FN |
| Tx Frequency: | 824.7 MHz – 848.3 MHz (LTE – Band 5 (1.4 MHz)) 825.5 MHz – 847.5 MHz (LTE – Band 5 (3 MHz)) 826.5 MHz – 846.5 MHz (LTE – Band 5 (5 MHz)) 829.0 MHz – 844.0 MHz (LTE – Band 5 (10 MHz)) |
| Date(s) of Tests: | August 06, 2018 ~ September 14, 2018 |

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11/b/g/n (HT20), Bluetooth, BTLE & NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

| Test Description | Test Procedure Used |
|---|---|
| Occupied Bandwidth | - KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4 |
| Band Edge | - KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 |
| Spurious and Harmonic Emissions at Antenna Terminal | - KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 |
| Conducted Output Power | - N/A (See SAR Report) |
| Peak- to- Average Ratio | - KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM) |
| Frequency stability | - ANSI C63.26-2015 – Section 5.6 |
| Effective Radiated Power/ Effective Isotropic Radiated Power | - KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17 |
| Radiated Spurious and Harmonic Emissions | - KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12 |

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data

3.4 OCCUPIED BANDWIDTH.

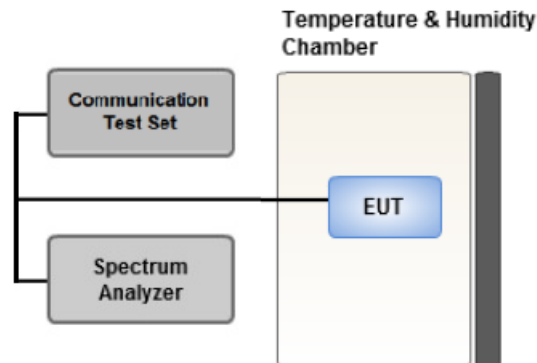

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

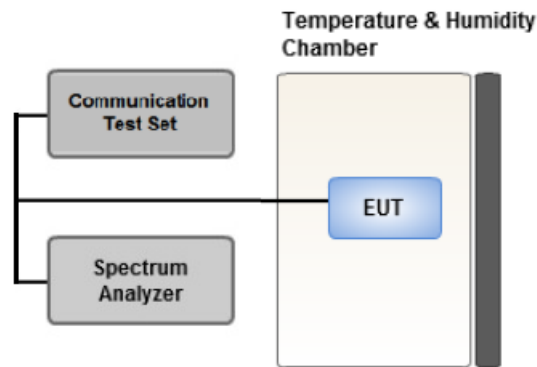

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep \geq 2 * Span / RBW

3.6 BAND EDGE

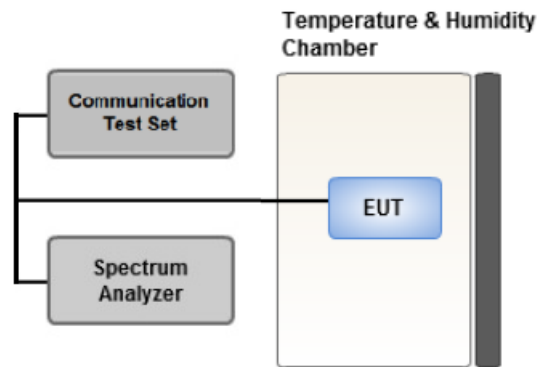

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

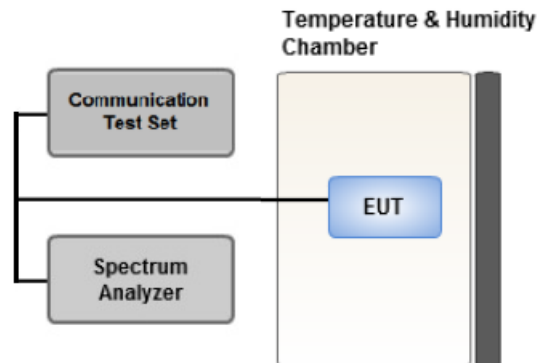

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.

[Worst case]

| Test Description | Modulation | RB size | RB offset | Axis |
|--|-------------|---------|-----------|------|
| Effective Radiated Power | QPSK, 16QAM | 1 | 0 | Z |
| Radiated Spurious and Harmonic Emissions | QPSK | 1 | 0 | Z |

Note:

- SM-J415FN/DS & SM-J415FN were tested and the worst case results are reported.
(Worst case : SM-J415FN/DS)

3.9 WORST CASE(CONDUCTED TEST)

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.
 Conducted Output Power value can be confirmed on the SAR report.

[Worst case]

| Test Description | Modulation | Bandwidth (MHz) | Frequency | RB size | RB offset |
|---|-------------|-----------------|----------------|---------|-----------|
| Occupied Bandwidth | QPSK, 16QAM | 1.4, 3, 5, 10 | Mid | Full RB | 0 |
| Band Edge | * QPSK | 1.4 | Low | 1 | 0 |
| | | | High | 1 | 5 |
| | | 3 | Low | 1 | 0 |
| | | | High | 1 | 14 |
| | | 5 | Low | 1 | 0 |
| | | | High | 1 | 24 |
| | | 10 | Low | 1 | 0 |
| | | | High | 1 | 49 |
| | | 1.4, 3, 5, 10 | Low, High | Full RB | 0 |
| | | | | | |
| Spurious and Harmonic Emissions at Antenna Terminal | * QPSK | 1.4, 3, 5, 10 | Low, Mid, High | 1 | 0 |

Note:

- SM-J415FN/DS & SM-J415FN were tested and the worst case results are reported.
 (Worst case : SM-J415FN/DS)

4. LIST OF TEST EQUIPMENT

| Manufacture | Model/ Equipment | Serial Number | Calibration Date | Calibration Interval | Calibration Due |
|------------------|--|---------------|------------------|----------------------|-----------------|
| REOHDE & SCHWARZ | SCU 18 / AMPLIFIER | 10094 | 04/17/2018 | Annual | 04/17/2019 |
| Wainwright | WHK1.2/15G-10EF/H.P.F | 4 | 04/04/2018 | Annual | 04/04/2019 |
| Wainwright | WHK3.3/18G-10EF/H.P.F | 2 | 04/04/2018 | Annual | 04/04/2019 |
| Hewlett Packard | 11667B / Power Splitter(DC~26.5 GHz) | 5001 | 06/07/2018 | Annual | 06/07/2019 |
| Agilent | E3632A/DC Power Supply | KR75303243 | 05/09/2018 | Annual | 05/09/2019 |
| Schwarzbeck | UHAP/ Dipole Antenna | 557 | 03/31/2017 | Biennial | 03/31/2019 |
| Schwarzbeck | UHAP/ Dipole Antenna | 558 | 03/31/2017 | Biennial | 03/31/2019 |
| ESPEC | SU-642 / Chamber | 93000718 | 03/30/2018 | Annual | 03/30/2019 |
| Schwarzbeck | BBHA 9120D/ Horn Antenna(1~18GHz) | 147 | 09/14/2018 | Biennial | 09/14/2019 |
| Schwarzbeck | BBHA 9120D/ Horn Antenna(1~18GHz) | 9120D-1298 | 10/14/2016 | Biennial | 10/14/2018 |
| Schwarzbeck | BBHA 9170/ Horn Antenna(15~40GHz) | BBHA9170342 | 04/25/2017 | Biennial | 04/25/2019 |
| Schwarzbeck | BBHA 9170/ Horn Antenna(15~40GHz) | BBHA9170124 | 04/25/2017 | Biennial | 04/25/2019 |
| Agilent | N9020A/Signal Analyzer(10Hz~26.5GHz) | MY52090906 | 06/08/2018 | Annual | 06/08/2019 |
| Hewlett Packard | 8493C/ATTENUATOR(20dB) | 17280 | 06/21/2018 | Annual | 06/21/2019 |
| REOHDE & SCHWARZ | FSV40/Spectrum Analyzer(10Hz~40GHz) | 100931 | 10/30/2017 | Annual | 10/30/2018 |
| Agilent | 8960 (E5515C)/ Base Station | MY48360800 | 09/26/2017 | Annual | 09/26/2018 |
| Schwarzbeck | FMZB1513/ Loop Antenna(9kHz~30MHz) | 1513-175 | 04/19/2017 | Biennial | 04/19/2019 |
| Schwarzbeck | VULB9160/ Bilog Antenna | 3150 | 09/30/2016 | Biennial | 09/30/2018 |
| Schwarzbeck | VULB9160/ Bilog Antenna | 9360-3368 | 10/14/2016 | Biennial | 10/14/2018 |
| Schwarzbeck | VULB9160/ Hybrid Antenna | 760 | 04/06/2017 | Biennial | 04/06/2019 |
| Anritsu Corp. | MT8820C/Wideband Radio Communication Tester | 6200863156 | 02/13/2018 | Annual | 02/13/2019 |
| Anritsu Corp. | MT8820C/Wideband Radio Communication Tester | 6201026545 | 02/08/2018 | Annual | 02/08/2019 |
| REOHDE & SCHWARZ | SMB100A/ SIGNAL GENERATOR (100kHz~40GHz) | 177633 | 07/19/2018 | Annual | 07/19/2019 |
| REOHDE & SCHWARZ | ESU40 / EMI TEST RECEIVER | 100524 | 07/27/2018 | Annual | 07/27/2019 |
| HCT CO., LTD., | FCC LTE Mobile Conducted RF Automation Test Software | - | - | - | - |

Note:

1. Model : BBHA 9120D(Horn Antenna)
 - Date of expiration : September 09, 2018
 - (Renewal)Date of Calibration : September 10, 2018 ~ September 14, 2018 11:00 a.m
 - Use date of antenna : *August 06, 2018 ~ September 07, 2018
 - *September 14, 2018 p.m

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter | Expanded Uncertainty (\pm dB) |
|--|----------------------------------|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.82 |
| Radiated Disturbance (9 kHz ~ 30 MHz) | 3.40 |
| Radiated Disturbance (30 MHz ~ 1 GHz) | 4.80 |
| Radiated Disturbance (1 GHz ~ 18 GHz) | 5.70 |
| Radiated Disturbance (18 GHz ~ 40 GHz) | 5.71 |

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

| Test Description | FCC Part Section(s) | Test Limit | Test Result | Status |
|--|---------------------|--|------------------|---------------------|
| Occupied Bandwidth | §2.1049 | N/A | PASS | NT ^{Note2} |
| Band Edge / Spurious and Harmonic Emissions at Antenna Terminal. | §2.1051, §22.917(a) | < 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions | PASS | NT ^{Note2} |
| Conducted Output Power | §2.1046 | N/A | <u>See Note1</u> | C ^{Note5} |
| Frequency stability / variation of ambient temperature | §2.1055, §22.355 | < 2.5 ppm | PASS | NT ^{Note2} |

Note:

1. See SAR Report
2. C = Comply, NT = Not Tested, NA = Not Applicable, NC = Not Comply
3. C2PC models are electrically identical to the Original models.
The Product Equality Declaration includes detailed information about the changes between the devices.
4. The data from that application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the test result of section 8
5. Output power was verified to be within the expected tune up tolerances prior to performing the spot checks for radiated spurious emissions, E.R.P and E.I.R.P to confirm that the proposed changes to the digital circuitry had not adversely affected the previously reported values in the original filing.

6.2 Test Condition : Radiated Test

| Test Description | FCC Part Section(s) | Test Limit | Test Result | Status |
|--|---------------------|---|-------------|--------------------|
| Effective Radiated Power | §22.913(a)(5) | < 7 Watts max. ERP | PASS | C ^{Note3} |
| Radiated Spurious and Harmonic Emissions | §2.1053, §22.917(a) | < 43 + 10log10 (P[Watts]) for all out-of band emissions | PASS | C ^{Note3} |

Note:

1. C = Comply, NT = Not Tested, NA = Not Applicable, NC = Not Comply
2. C2PC models are electrically identical to the Original models.
The Product Equality Declaration includes detailed information about the changes between the devices.
3. The data from that application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the test result of section 8

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

| Ch./ Freq. | | Measured Level(dBm) | Substitute Level(dBm) | Ant. Gain (dBd) | C.L | Pol. | ERP | |
|------------|------------|---------------------|-----------------------|-----------------|------|------|-------|-------|
| channel | Freq.(MHz) | | | | | | W | dBm |
| 128 | 824.20 | -21.37 | 38.40 | -10.61 | 0.95 | H | 0.483 | 26.84 |

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

| Ch./ Freq. | | Measured Level(dBm) | Substitute Level(dBm) | Ant. Gain (dBi) | C.L | Pol. | EIRP | |
|------------|------------|---------------------|-----------------------|-----------------|------|------|-------|-------|
| channel | Freq.(MHz) | | | | | | W | dBm |
| 20175 | 1,732.50 | -15.75 | 18.45 | 9.90 | 1.76 | H | 0.456 | 26.59 |

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST RESULT (E.R.P & Radiated Spurious Emission)

8.1 EFFECTIVE RADIATED POWER

| Modulation | Frequency | | Mod/ Bandwidth | Original (dBm) | C2PC (dBm) | Deviation (dB) |
|------------|-----------|-------|-------------------|-------------------|---------------|-------------------|
| | MHz | Ch. | | | | |
| LTE B5 | 836.5 | 20525 | QPSK(10M) | 17.50 | 16.78 | -0.72 |

8.2 RADIATED SPURIOUS EMISSIONS

| Modulation | Frequency | | Mod/ Bandwidth | Original (dBm) | C2PC (dBm) | Deviation (dB) |
|------------|-----------|-------|-------------------|-------------------|---------------|-------------------|
| | MHz | Ch. | | | | |
| LTE B5 | 2544.9 | 20643 | QPSK(1.4M) | -40.80 | -49.04 | -8.24 |

9. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

| No. | Description |
|-----|---------------------|
| 1 | HCT-RF-1809-FC065-P |
| 2 | HCT-RF-1809-FC066-P |
| 3 | HCT-RF-1809-FC067-P |