

# FCC ANT<sup>+</sup> REPORT

## FCC Certification

**Applicant Name:**

SAMSUNG Electronics Co.,Ltd.

**Address:**129, Samsung-ro, Yeongtong-gu, Suwon-si,  
Gyeonggi-do, 16677, Rep. of Korea**Date of Issue:**

March 15, 2016

**Test Site/Location:**HCT CO., LTD., 74,Seoicheon-ro 578beon-gil,Majang-  
myeo,Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA**Report No.:** HCT-R-1603-F070**HCT FRN:** 0005866421**IC Recognition No.:** 5944A-5**FCC ID : A3LSMJ700T****APPLICANT : SAMSUNG Electronics Co., Ltd.****Model(s):** SM-J700T**Additional Model(s):** SM-J700T1**EUT Type:** Mobile Phone**Max. RF Output Power:** 102.75 dB $\mu$ V/m @3 m**Frequency Range:** 2402 MHz -2480 MHz**Modulation type** GFSK**FCC Classification:** Low Power communication Device Transmitter(DXX)**FCC Rule Part(s):** Part 15.249**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

**Report prepared by  
: Seoul Ki Lee****Test Engineer of RF Team****Approved by  
: Sang Jun Lee****Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1603-F070	March 15, 2016	- First Approval Report

# Table of Contents

- 1. GENERAL INFORMATION ..... 4
- 2. EUT DESCRIPTION ..... 4
- 3. TEST METHODOLOGY ..... 5
  - 3.1 EUT CONFIGURATION ..... 5
  - 3.2 EUT EXERCISE ..... 5
  - 3.3 GENERAL TEST PROCEDURES ..... 5
  - 3.4 DESCRIPTION OF TEST MODES ..... 5
- 4. INSTRUMENT CALIBRATION..... 6
- 5. FACILITIES AND ACCREDITATIONS ..... 6
  - 5.1 FACILITIES ..... 6
  - 5.2 EQUIPMENT ..... 6
- 6. ANTENNA REQUIREMENTS ..... 6
- 7. MEASUREMENT UNCERTAINTY ..... 7
- 8. SUMMARY TEST OF RESULTS ..... 8
- 9. TEST RESULT ..... 9
  - 9.1 DUTY CYCLE..... 9
  - 9.2 OCCUPIED BANDWIDTH MEASUREMENT ..... 11
  - 9.3 RADIATED MEASUREMENT..... 14
    - 9.3.1 FUNDAMENTAL FIELD STRENGTH LEVEL MEASUREMENT ..... 14
    - 9.3.2 RADIATED SPURIOUS EMISSIONS..... 18
    - 9.3.3 RADIATED BAND EDGES MEASUREMENTS..... 28
  - 9.4 POWERLINE CONDUCTED EMISSIONS ..... 33
- 10.LIST OF TEST EQUIPMENT ..... 38
  - 10.1 LIST OF TEST EQUIPMENT (Conducted Test) ..... 38
  - 10.2 LIST OF TEST EQUIPMENT (Radiated Test)..... 39

## 1. GENERAL INFORMATION

**Applicant:** SAMSUNG Electronics Co.,Ltd.  
**Address:** 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea  
**FCC ID:** A3LSMJ700T  
**EUT Type:** Mobile Phone  
**Model (s):** SM-J700T  
**Additional Model (s):** SM-J700T1  
**Date(s) of Tests:** February 25, 2016 ~ March 14, 2016  
**Place of Tests:** HCT Co., Ltd.  
 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea  
 (IC Recognition No. : 5944A-3)

## 2. EUT DESCRIPTION

<b>Model</b>	SM-J700T	
<b>Additional Model</b>	SM-J700T1	
<b>EUT Type</b>	Mobile Phone	
<b>Power Supply</b>	DC 3.8 V	
<b>Battery Information</b>	Model: EB-BJ700BBU Type: Li-ion Battery	
<b>Frequency Range</b>	TX: 2402 MHz ~ 2480 MHz RX: 2402 MHz ~ 2480 MHz	
<b>Fundamental Field Strength Level</b>	Peak	102.75 dB $\mu$ V/m @3 m
	Average	57.07 dB $\mu$ V/m @3 m
<b>Operating Mode</b>	ANT+	
<b>Modulation Type</b>	GFSK	
<b>Number of Channels</b>	79 Channels	
<b>Antenna Specification</b>	Manufacturer: PARTRON Antenna type: INTERNAL ANTENNA Peak Gain : 1.81 dBi	

### **3. TEST METHODOLOGY**

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) Operating Under §15.249” were used in the measurement.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.249 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

#### **3.4 DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

All equipments(spectrum, antenna, accessory, etc.) for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203

## 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	6.07

## 8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
Occupied Bandwidth	§2.1049	N/A	CONDUCTED	PASS
Duty Cycle	§15.35(c)	N/A		N/A
AC Power line Conducted Emissions	§15.207	cf. Section 8.4		PASS
Fundamental Field Strength Level	§15.249(a)(e)	< 50 mV/m	RADIATED	PASS
Harmonic Field Strength Level	§15.249(a)(e)	< 500 mV/m		PASS
General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	§15.205, 15.209, 15.249(d)(e)	< 15.209 limits or 50dB below the level of the fundamental		PASS


## 9. TEST RESULT

### 9.1 DUTY CYCLE

#### Test Requirements §15.35(c)

(c) Unless otherwise specified, e.g. § 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification

#### ■ TEST CONFIGURATION

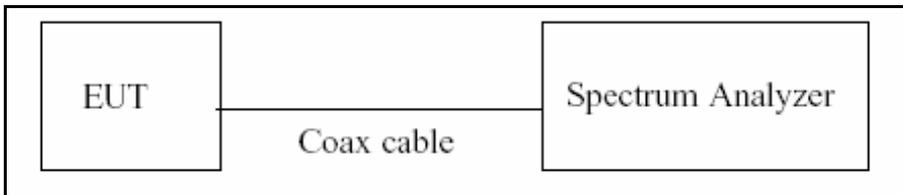


#### ■ TEST RESULTS

$$\begin{aligned} \text{DCCF} &= 20 \cdot \log_{10}(\text{Pulse width} / \text{Period of the pulse train}) \\ &= 20 \cdot \log_{10}(2 \times 0.260 \text{ ms} / 100 \text{ ms}) = -45.68\text{dB} \end{aligned}$$


<b>DCCF</b>
<b>-45.68 dB</b>

▣ TEST RESULTS PLOTS

Pulse Width plot

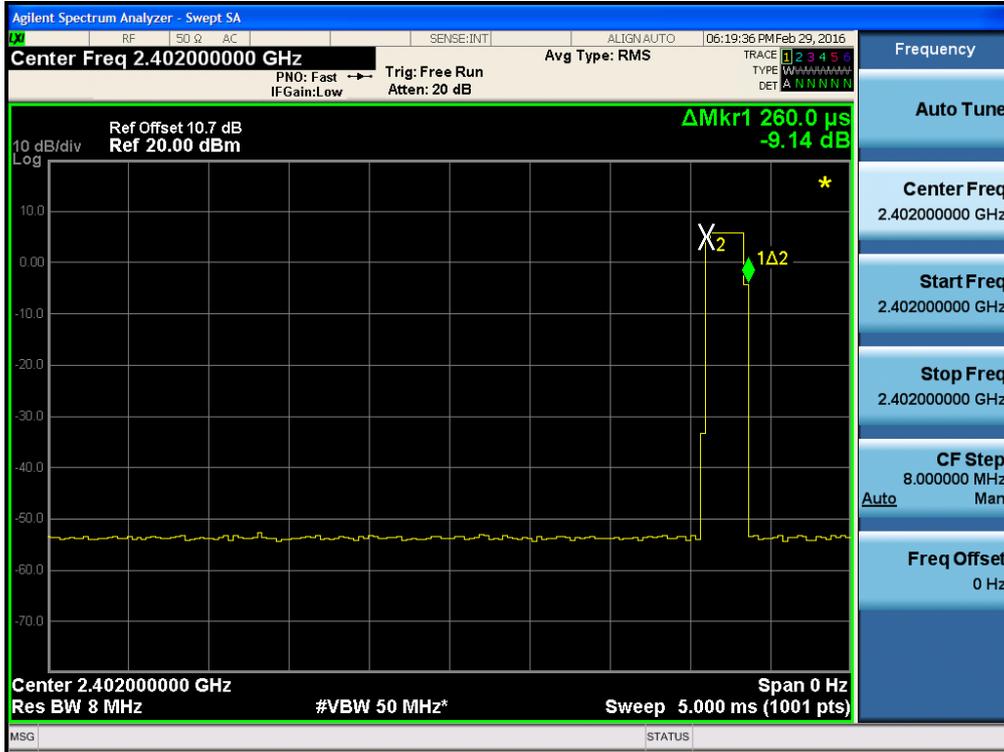

Period of the Pulse Train

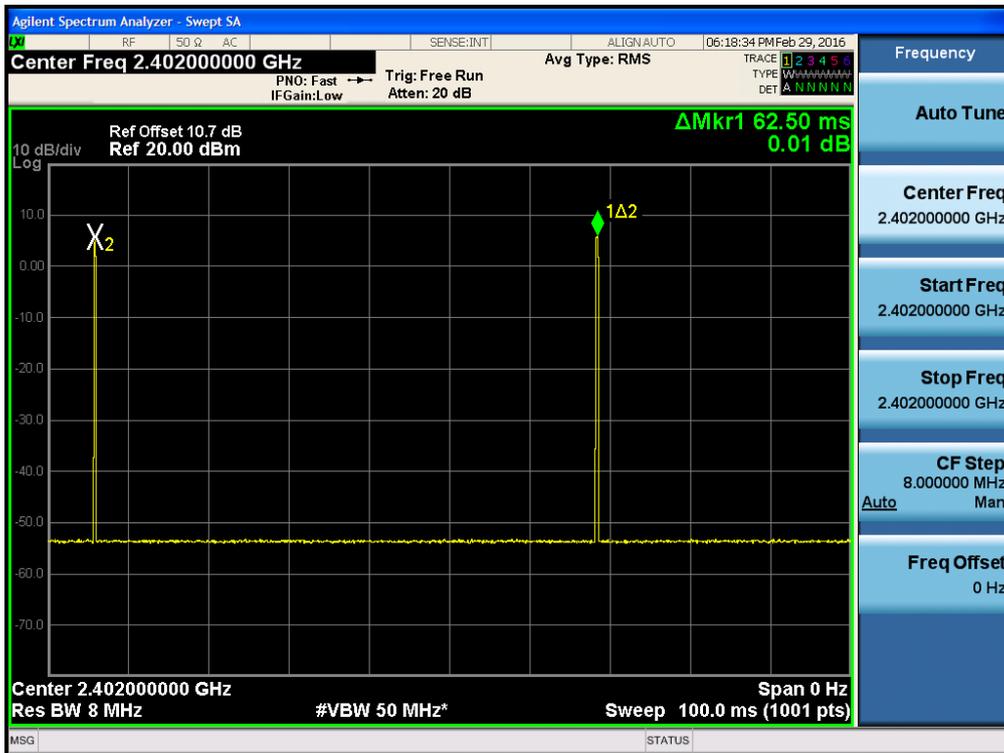


## 9.2 OCCUPIED BANDWIDTH MEASUREMENT

### Test Requirements and limit, §2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

#### ■ TEST CONFIGURATION

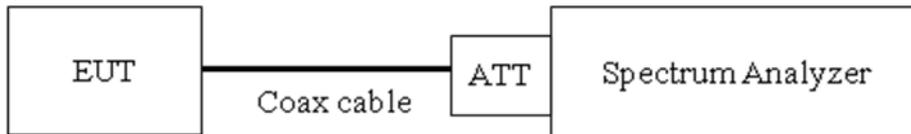

#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

RBW = 1% to 3% of the 99% bandwidth.

VBW  $\geq$  3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested Occupied Bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

#### ■ TEST RESULTS

ANT+ Mode	99% Bandwidth
Frequency[MHz]	(MHz)
2402	1.0180
2441	1.0140
2480	1.0112

RESULT PLOTS


Occupied Bandwidth plot (Low)



Occupied Bandwidth plot (Mid)



**Occupied Bandwidth plot (High)**

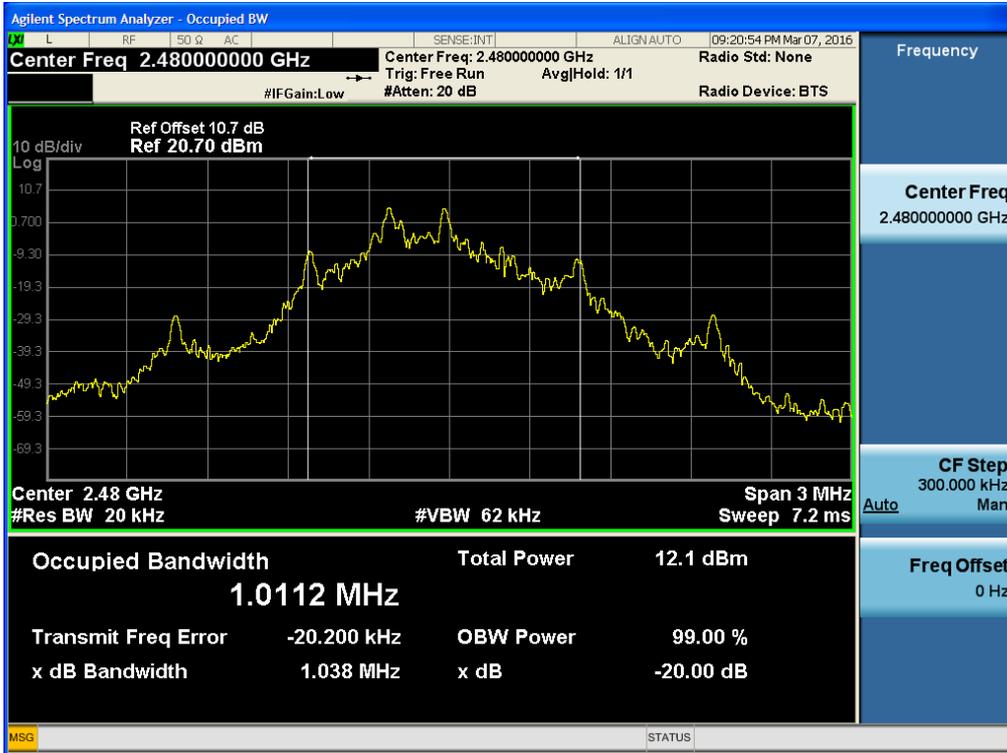

**9.3 RADIATED MEASUREMENT.**

**9.3.1 FUNDAMENTAL FIELD STRENGTH LEVEL MEASUREMENT**

**Test Requirements and limit, §15.249(a)(e)**

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts meter)	Field strength of harmonics (millivolts meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(c) Field strength limits are specified at a distance of 3 meters.

(e) As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

**The maximum permissible average field strength level is 50 mV/m (93.98 dBuV/m).**

**The maximum permissible peak field strength level is 500 mV/m (113.98 dBuV/m).**

**TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum Setting
  - a. Peak: 1 GHz – 25 GHz, RBW = 1 MHz, VBW ≥3\*RBW

#### 8. Average value of pulsed emissions

Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall be determined from the peak field strength after correcting for the worst-case duty cycle as described in section 8.1.


■ TEST RESULTS

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2402	68.93	31.31	V	0.00	100.24	113.98	13.74	PK
2402	68.93	31.31	V	-45.68	54.56	93.98	39.42	AV
2402	68.64	31.31	H	0.00	99.95	113.98	14.03	PK
2402	68.64	31.31	H	-45.68	54.27	93.98	39.71	AV
2441	71.33	31.42	V	0.00	102.75	113.98	11.23	PK
2441	71.33	31.42	V	-45.68	57.07	93.98	36.91	AV
2441	71.19	31.42	H	0.00	102.61	113.98	11.37	PK
2441	71.19	31.42	H	-45.68	56.93	93.98	37.05	AV
2480	70.11	31.30	V	0.00	101.41	113.98	12.57	PK
2480	70.11	31.30	V	-45.68	55.73	93.98	38.25	AV
2480	69.83	31.30	H	0.00	101.13	113.98	12.85	PK
2480	69.83	31.30	H	-45.68	55.45	93.98	38.53	AV

Note :

1. Average field strength data is determined by applying the duty cycle correction factor(DCCF) found in Section 8.1 to the measured peak field strength values.
2. Peak: Total = Reading Value + Antenna Factor + Cable Loss  
Average: Total = Reading Value + Antenna Factor + Cable Loss + Duty Cycle Correction
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. Measurement distance : 3 m

■ RESULT PLOTS (Worst case : z-V)

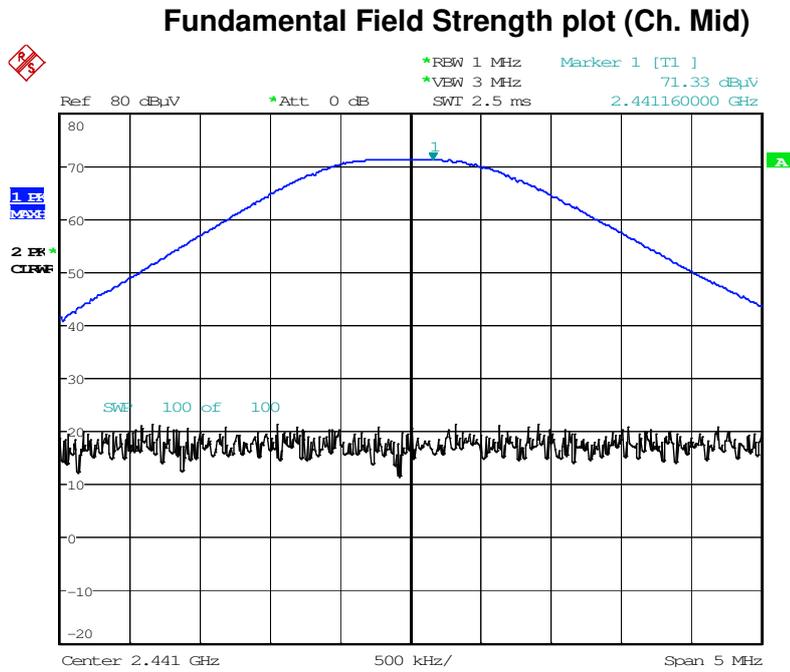

Date: 8.MAR.2016 16:31:01

**Note : Only the worst case plots for Fundamental Field Strength**

**9.3.2 RADIATED SPURIOUS EMISSIONS.**

**Test Requirements and limit, §15.205, §15.209, §15.249(d)(e)**


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


(e) As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


### Test Configuration

#### Below 30 MHz

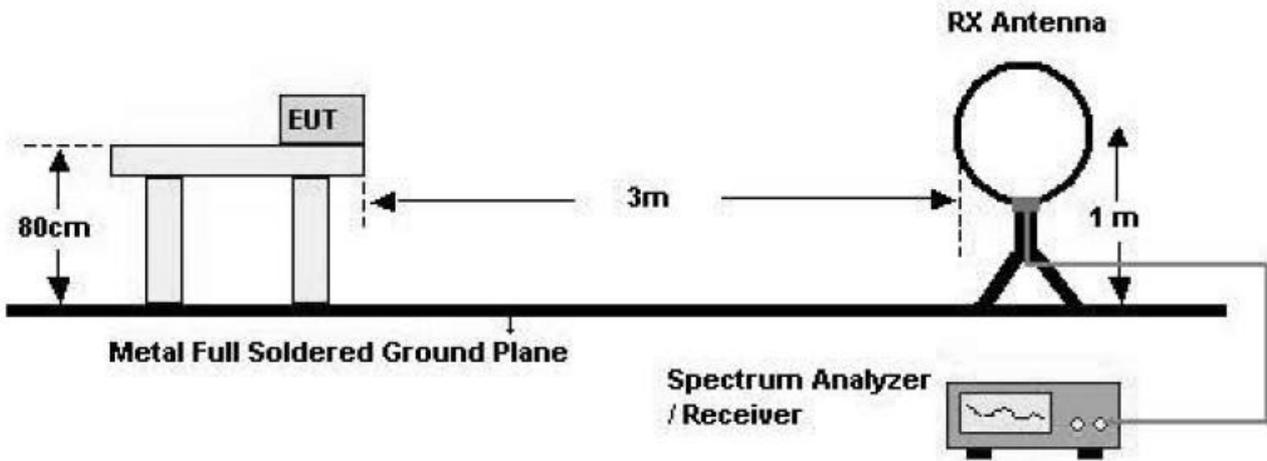

#### 30 MHz - 1 GHz

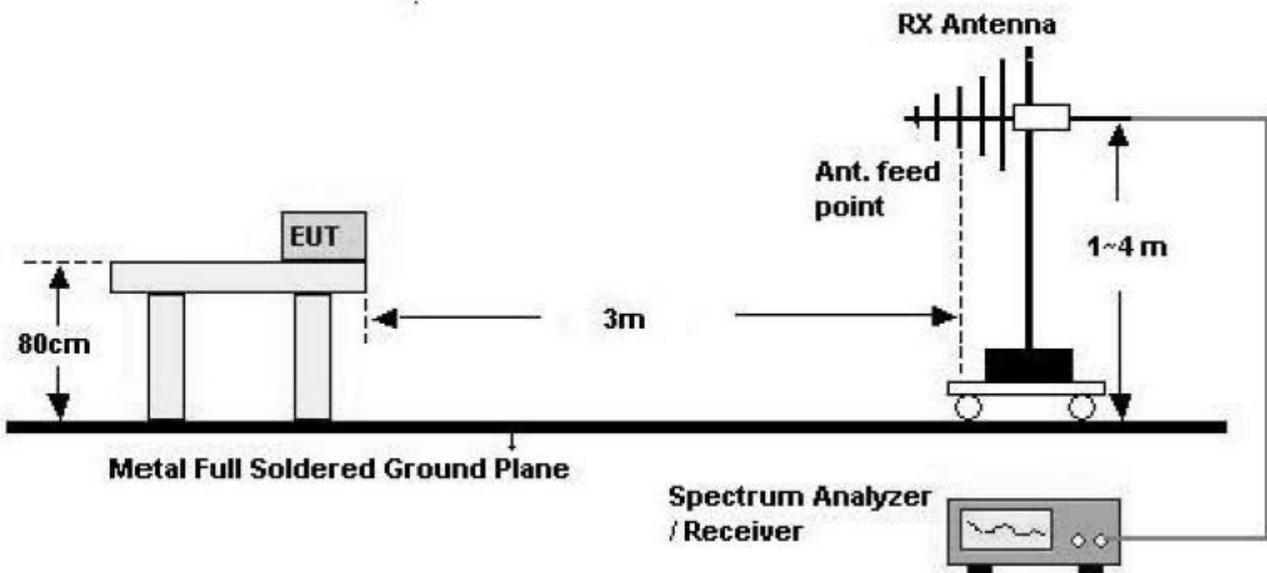

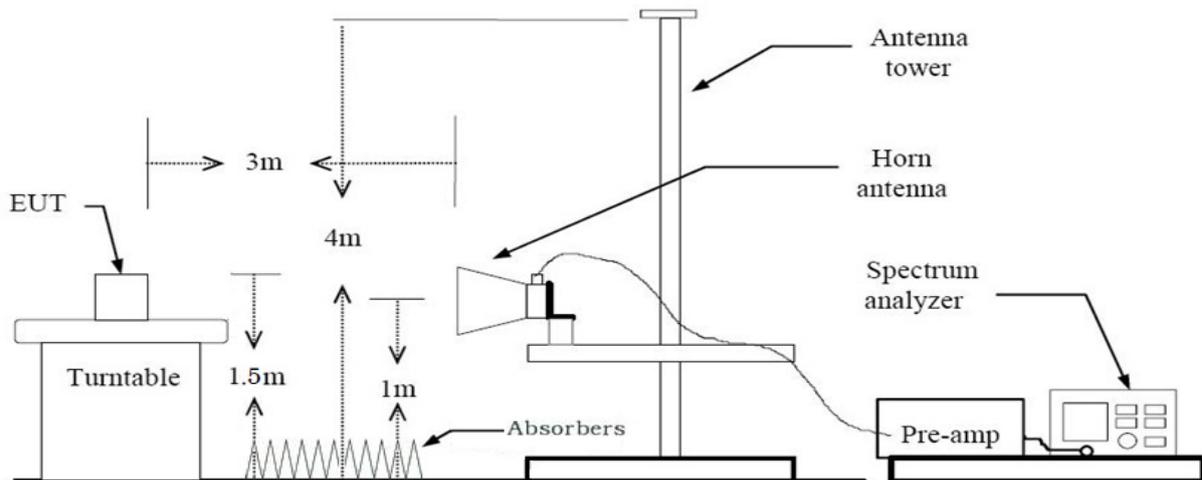**Above 1 GHz****TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum Setting
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.
8. Average value of pulsed emissions

Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall be determined from the peak field strength after correcting for the worst-case duty cycle as described in section 8.1.
9. Marker-delta method (Section 6.10.6 in ANSI C63.10: 2013)

The following procedure shall be used for the marker-delta method:

  - a) Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function required for the frequency being measured. For example, for a device operating in the 902 MHz to

928 MHz band, use a 120 kHz RBW with a CISPR QP detector (a peak detector with 100 kHz RBW alternatively may be used). For transmitters operating above 1 GHz, use a 1 MHz RBW, a 3 MHz VBW, and a peak detector, as required. Repeat the measurement with an average detector (or alternatively, a peak detector and reduced VBW). For pulsed emissions, other factors shall be included; see 4.1.4.2.6.

- b) Choose an EMI receiver or spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the instrument RBW to 1% of the total span (but never less than 30 kHz), with a VBW equal to or greater than three times the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission(i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
- c) Subtract the delta measured in step b) from the field strengths measured in step a). The resulting field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge emissions compliance, where required.

Note :

- 1. We used the standard radiated method(1/T) for RSE and used the average value of pulsed emission and delta marker method for band edge.
- 2. Below VBW is for RSE test

<b>ANT+ Mode</b>	<b>T<sub>on</sub></b> (ms)	<b>VBW(1/T)</b> (Hz)	<b>The actual setting value</b> <b>of VBW</b> (Hz)
	<b>0.260</b>	<b>3846</b>	<b>10000</b>

**TEST RESULTS**

**9 kHz – 30MHz**

**Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V/m	dBm /m	dBm	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. This test is performed with hopping off.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. The test results for below 30 MHz is correlated to an open site.  
The result on OATS is about 6.5 dB higher than semi-anechoic chamber(10 m chamber)
8. Measurement distance : 3 m

**TEST RESULTS**

**Below 1 GHz**

**Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	$\text{dB}\mu\text{V}/\text{m}$	$\text{dBm}/\text{m}$	$\text{dBm}$	(H/V)	$\text{dB}\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m}$	$\text{dB}$
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. This test is performed with hopping off.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. Measurement distance : 3 m

**Above 1 GHz**

**Operation Frequency: 2402 MHz**

Frequency [MHz]	Reading [dBuV/m]	A.F.+C.L.-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	51.96	-2.96	V	49.00	73.98	24.98	PK
4804	45.66	-2.96	V	42.70	53.98	11.28	AV
7206	46.33	6.88	V	53.21	73.98	20.77	PK
7206	34.55	6.88	V	41.43	53.98	12.55	AV
4804	52.51	-2.96	H	49.55	73.98	24.43	PK
4804	46.24	-2.96	H	43.28	53.98	10.70	AV
7206	46.58	6.88	H	53.46	73.98	20.52	PK
7206	34.58	6.88	H	41.46	53.98	12.52	AV

※ A:F: ANTENNA FACTOR  
 C:L: CABLE LOSS  
 AMP G: AMPLIFIER GAIN

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss – Amplifier Gain
5. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds.  
 We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Measurement distance : 3 m

**Operation Frequency: 2441 MHz**

Frequency [MHz]	Reading [dBuV/m]	A.F.+C.L.-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	51.39	-2.60	V	48.79	73.98	25.19	PK
4882	45.23	-2.60	V	42.63	53.98	11.35	AV
7323	46.56	6.11	V	52.67	73.98	21.31	PK
7323	35.22	6.11	V	41.33	53.98	12.65	AV
4882	52.02	-2.60	H	49.42	73.98	24.56	PK
4882	45.85	-2.60	H	43.25	53.98	10.73	AV
7323	46.87	6.11	H	52.98	73.98	21.00	PK
7323	35.34	6.11	H	41.45	53.98	12.53	AV

※ A:F: ANTENNA FACTOR  
 C:L: CABLE LOSS  
 AMP G: AMPLIFIER GAIN

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss – Amplifier Gain
5. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds.  
 We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Measurement distance : 3 m

**Operation Frequency: 2480 MHz**

Frequency [MHz]	Reading [dBuV/m]	A.F.+C.L.-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.46	-2.53	V	47.93	73.98	26.05	PK
4960	43.76	-2.53	V	41.23	53.98	12.75	AV
7440	46.71	5.73	V	52.44	73.98	21.54	PK
7440	35.20	5.73	V	40.93	53.98	13.05	AV
4960	51.08	-2.53	H	48.55	73.98	25.43	PK
4960	44.31	-2.53	H	41.78	53.98	12.20	AV
7440	46.87	5.73	H	52.60	73.98	21.38	PK
7440	35.29	5.73	H	41.02	53.98	12.96	AV


※ A:F: ANTENNA FACTOR  
 C:L: CABLE LOSS  
 AMP G: AMPLIFIER GAIN

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss – Amplifier Gain
5. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds.  
 We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. Measurement distance : 3 m


■ **RESULT PLOTS (Worst case : z-H)**

**Radiated Spurious Emissions plot – Average Reading (Ch. High 3rd Harmonic)**

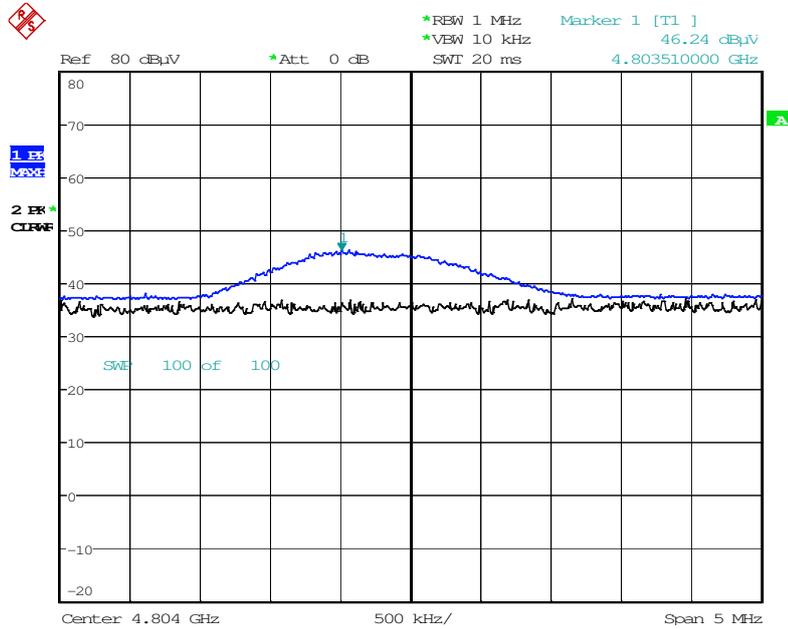

Date: 9.MAR.2016 10:45:11

**Radiated Spurious Emissions plot – Peak Reading (Ch. High 3rd Harmonic)**

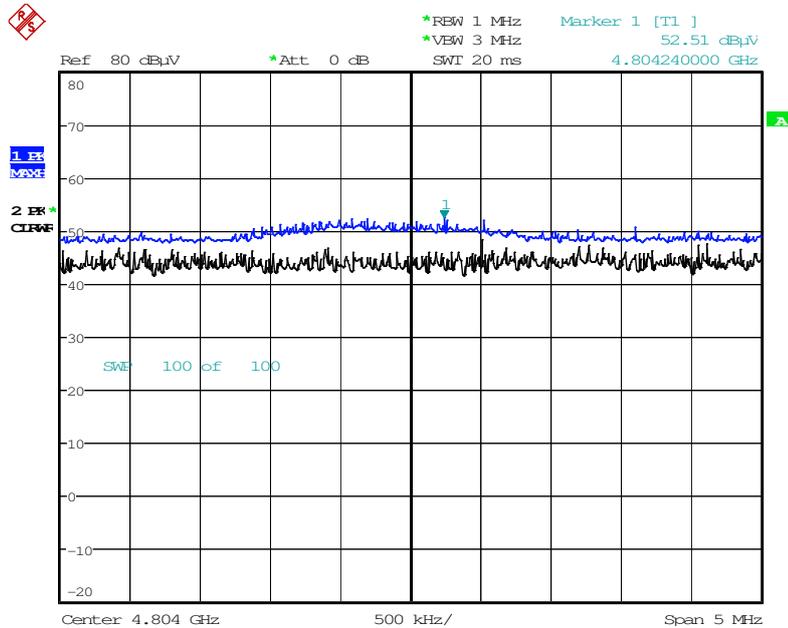

Date: 9.MAR.2016 10:42:16

**Note : Only the worst case plots for Radiated Spurious Emissions.**

### 9.3.3 RADIATED BAND EDGES MEASUREMENTS

#### Test Requirements and limit, §15.205, §15.209, §15.249

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or tho the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Operation Mode	ANT+
Operating Frequency	2402 MHz

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2398.0	25.97	31.31	H	57.28	73.98	16.70	PK
2398.0	19.36	31.31	H	50.67	53.98	3.31	AV
2398.0	26.26	31.31	V	57.57	73.98	16.41	PK
2398.0	19.52	31.31	V	50.83	53.98	3.15	AV

※ A:F: ANTENNA FACTOR  
C:L: CABLE LOSS

#### Notes:

1. Frequency range of measurement = 2310 MHz ~ 2398 MHz
2. Total = Reading Value + Antenna Factor + Cable Loss
3. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW ≥ 1/τ Hz, where τ = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
5. Measurement distance : 3 m

Operation Mode ANT+  
 Operating Frequency 2402 MHz

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dB]	Ant. Pol. [H/V]	Fundamental [dBuV/m]	Delta Value [dBuV/m]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2400.0	68.13	31.31	H	99.44	52.04	0	47.40	73.98	26.58	PK
2400.0	68.13	31.31	H	99.44	52.04	-46.09	1.31	53.98	52.67	AV
2400.0	68.57	31.31	V	99.88	52.75	0	47.13	73.98	26.85	PK
2400.0	68.57	31.31	V	99.88	52.75	-46.09	1.04	53.98	52.94	AV

※ A:F: ANTENNA FACTOR  
 C:L: CABLE LOSS

**Notes:**

1. Frequency range of measurement = 2398 MHz ~ 2400 MHz
2. Total = Reading Value + Antenna Factor + Cable Loss - Delta Value + D.C.C.F
3. Marker-delta method
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
5. Average field strength data is determined by applying the duty cycle correction factor(DCCF) found in Section 8.1 to the measured peak field strength values.
6. Measurement distance : 3 m

Operation Mode

ANT+

Operating Frequency

2480 MHz

Frequency [MHz]	Reading [dBuV/m]	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	30.99	31.37	H	0	62.36	73.98	11.62	PK
2483.5	30.99	31.37	H	-45.68	16.68	53.98	37.30	AV
2483.5	31.49	31.37	V	0	62.86	73.98	11.12	PK
2483.5	31.49	31.37	V	-45.68	17.18	53.98	36.80	AV

※ A:F: ANTENNA FACTOR


C:L: CABLE LOSS

**Notes:**

1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
2. Total = Reading Value + Antenna Factor + Cable Loss + Duty Cycle Correction Factor
3. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
4. Average field strength data is determined by applying the duty cycle correction factor(DCCF) found in Section 8.1 to the measured peak field strength values.
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
6. Measurement distance : 3 m


■ RESULT PLOTS (Worst case : z-V)

**Radiated Band Edges plot – Average Reading (Low Ch.)**

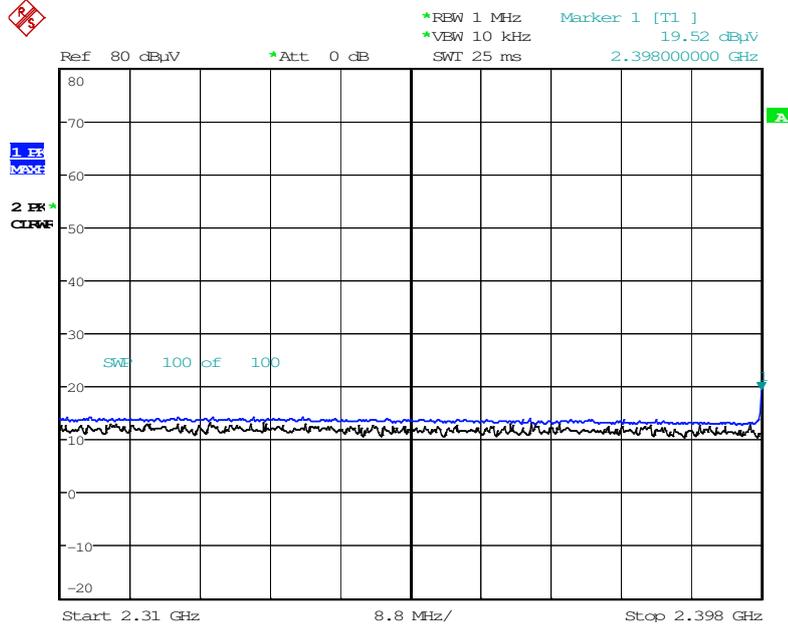

Date: 8.MAR.2016 19:52:56

**Radiated Band Edges plot – Peak Reading (Low Ch.)**

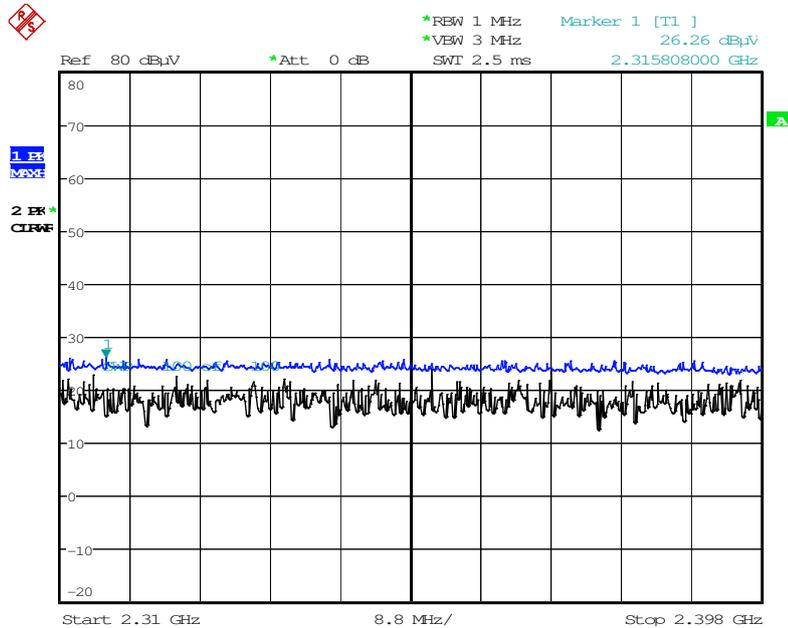


Date: 8.MAR.2016 19:56:42

**Note : We attached Only the worst case plots for Radiated Band Edges.**


■ Marker-delta method (Worst case : z-V)

**Radiated Band Edges plot – Peak Reading (Low Ch.)**

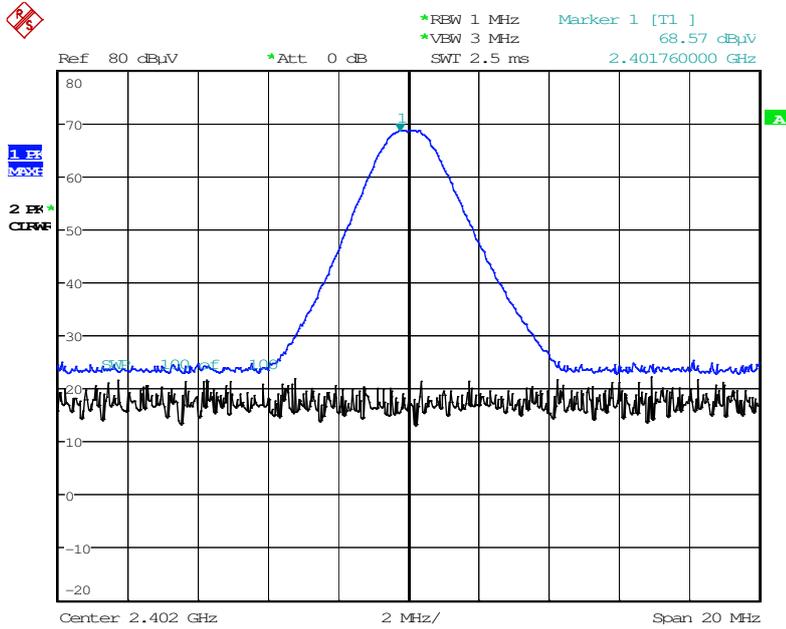

Date: 8.MAR.2016 16:57:19

**Radiated Band Edges plot – Delta(Low Ch.)**

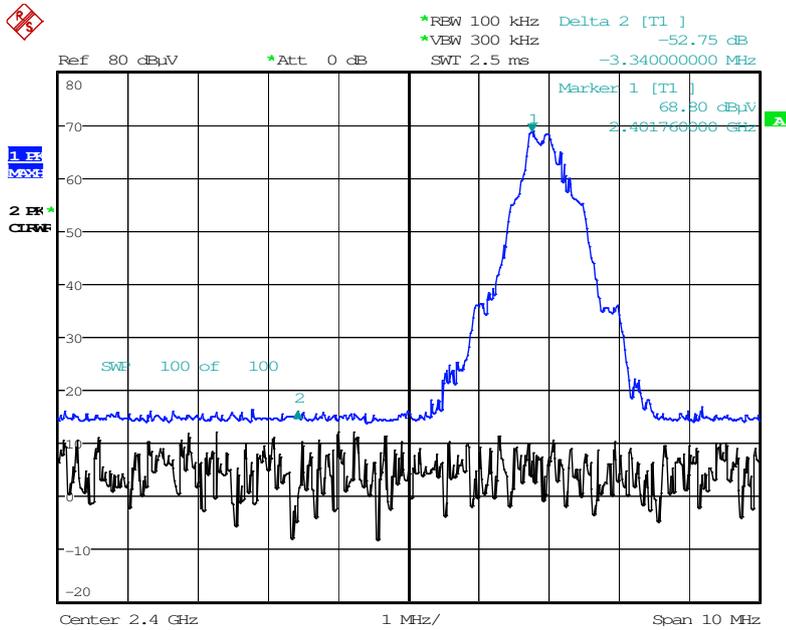

Date: 8.MAR.2016 17:04:44

**Note : We only attached the worst case plots for Radiated Band Edges.**

## 9.4 POWERLINE CONDUCTED EMISSIONS

### Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

▣ RESULT PLOTS

Conducted Emissions (Line 1)

Test


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-J700T  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: ANT+ MODE  
 Operator Name: SK LEE

FCC CLASS B

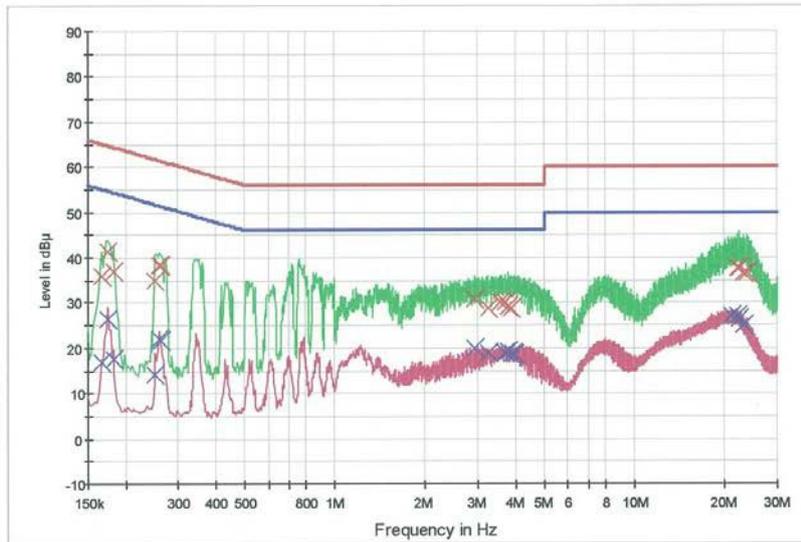

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      x Final Result 1-QPK      x Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	36.1	9.000	Off	N	9.6	29.1	65.2
0.174000	41.5	9.000	Off	N	9.6	23.3	64.8
0.182000	37.1	9.000	Off	N	9.6	27.3	64.4
0.252000	34.9	9.000	Off	N	9.6	26.8	61.7
0.260000	38.3	9.000	Off	N	9.6	23.1	61.4
0.264000	38.5	9.000	Off	N	9.6	22.8	61.3
2.918000	30.7	9.000	Off	N	9.8	25.3	56.0
3.254000	28.8	9.000	Off	N	9.8	27.2	56.0
3.562000	30.2	9.000	Off	N	9.8	25.8	56.0
3.704000	30.1	9.000	Off	N	9.8	25.9	56.0
3.780000	29.2	9.000	Off	N	9.8	26.8	56.0
3.870000	28.6	9.000	Off	N	9.8	27.4	56.0
22.126000	37.6	9.000	Off	N	10.3	22.4	60.0
22.186000	37.7	9.000	Off	N	10.3	22.3	60.0
22.202000	37.6	9.000	Off	N	10.3	22.4	60.0
22.338000	37.5	9.000	Off	N	10.3	22.5	60.0
23.280000	36.8	9.000	Off	N	10.4	23.2	60.0
23.856000	36.6	9.000	Off	N	10.4	23.4	60.0

2016-03-12

오후 2:09:59

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	16.7	9.000	Off	N	9.6	38.4	55.2
0.174000	26.4	9.000	Off	N	9.6	28.4	54.8
0.182000	17.6	9.000	Off	N	9.6	36.8	54.4
0.252000	14.2	9.000	Off	N	9.6	37.5	51.7
0.260000	22.1	9.000	Off	N	9.6	29.4	51.4
0.264000	21.6	9.000	Off	N	9.6	29.7	51.3
2.918000	20.0	9.000	Off	N	9.8	26.0	46.0
3.260000	19.0	9.000	Off	N	9.8	27.0	46.0
3.704000	19.1	9.000	Off	N	9.8	26.9	46.0
3.780000	19.4	9.000	Off	N	9.8	26.6	46.0
3.870000	18.5	9.000	Off	N	9.8	27.5	46.0
3.970000	18.5	9.000	Off	N	9.8	27.5	46.0
21.228000	27.1	9.000	Off	N	10.3	22.9	50.0
22.126000	27.0	9.000	Off	N	10.3	23.0	50.0
22.186000	27.1	9.000	Off	N	10.3	22.9	50.0
22.202000	27.0	9.000	Off	N	10.3	23.0	50.0
22.338000	26.4	9.000	Off	N	10.3	23.6	50.0
23.280000	24.9	9.000	Off	N	10.4	25.1	50.0

2016-03-12

오후 2:09:59

**Conducted Emissions (Line 2)**

Test


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-J700T  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: ANT+ MODE  
 Operator Name: SK LEE

FCC CLASS B

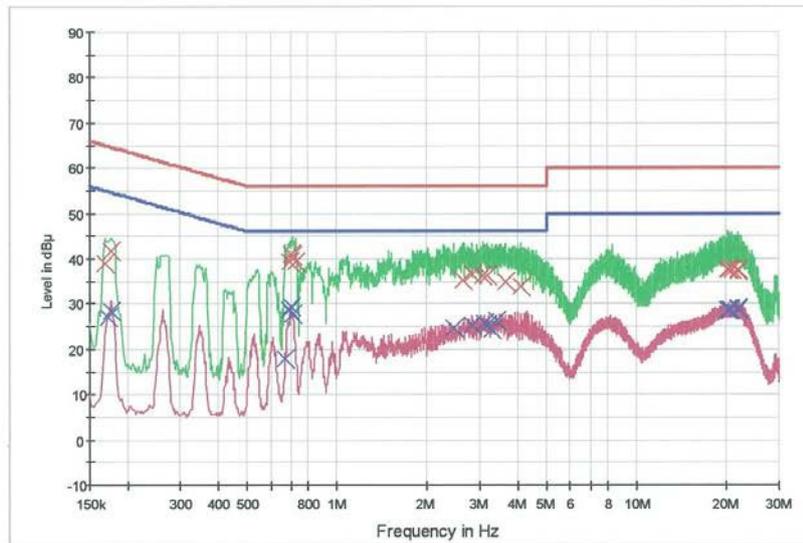

— FCC CLASS B\_OP    — FCC CLASS B\_AV    — Preview Result 1-PK+  
 — Preview Result 2-AVG    X Final Result 1-QPK    X Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.168000	38.9	9.000	Off	L1	9.6	26.2	65.1
0.176000	41.5	9.000	Off	L1	9.6	23.1	64.7
0.692000	39.5	9.000	Off	L1	9.7	16.5	56.0
0.700000	40.9	9.000	Off	L1	9.7	15.1	56.0
0.712000	40.6	9.000	Off	L1	9.7	15.4	56.0
0.728000	39.2	9.000	Off	L1	9.7	16.8	56.0
2.622000	35.2	9.000	Off	L1	9.8	20.8	56.0
2.820000	36.7	9.000	Off	L1	9.8	19.3	56.0
3.060000	36.2	9.000	Off	L1	9.8	19.8	56.0
3.182000	36.4	9.000	Off	L1	9.8	19.6	56.0
3.638000	35.0	9.000	Off	L1	9.8	21.0	56.0
4.094000	34.0	9.000	Off	L1	9.8	22.0	56.0
20.172000	37.6	9.000	Off	L1	10.3	22.4	60.0
20.176000	37.7	9.000	Off	L1	10.3	22.3	60.0
20.338000	37.7	9.000	Off	L1	10.3	22.3	60.0
20.948000	37.7	9.000	Off	L1	10.3	22.3	60.0
21.810000	37.6	9.000	Off	L1	10.3	22.4	60.0
21.892000	37.4	9.000	Off	L1	10.3	22.6	60.0

2016-03-12

오후 2:19:40

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.172000	27.0	9.000	Off	L1	9.6	27.9	54.9
0.176000	28.4	9.000	Off	L1	9.6	26.2	54.7
0.674000	18.0	9.000	Off	L1	9.7	28.0	46.0
0.698000	28.9	9.000	Off	L1	9.7	17.1	46.0
0.702000	29.6	9.000	Off	L1	9.7	16.4	46.0
0.710000	27.6	9.000	Off	L1	9.7	18.4	46.0
2.458000	24.8	9.000	Off	L1	9.8	21.2	46.0
2.820000	25.3	9.000	Off	L1	9.8	20.7	46.0
3.120000	25.7	9.000	Off	L1	9.8	20.3	46.0
3.182000	25.3	9.000	Off	L1	9.8	20.7	46.0
3.274000	24.5	9.000	Off	L1	9.8	21.5	46.0
3.404000	26.3	9.000	Off	L1	9.8	19.7	46.0
20.172000	28.8	9.000	Off	L1	10.3	21.2	50.0
20.176000	28.7	9.000	Off	L1	10.3	21.3	50.0
20.336000	28.9	9.000	Off	L1	10.3	21.1	50.0
20.574000	28.9	9.000	Off	L1	10.3	21.1	50.0
21.812000	29.0	9.000	Off	L1	10.3	21.0	50.0
21.892000	28.9	9.000	Off	L1	10.3	21.1	50.0

2016-03-12

오후 2:19:40

## 10.LIST OF TEST EQUIPMENT

### 10.1 LIST OF TEST EQUIPMENT (Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	12/28/2015	Annual	100073
Agilent	E4440A/ Spectrum Analyzer	03/18/2015	Annual	US45303008
Agilent	N9020A / SIGNAL ANALYZER	06/30/2015	Annual	MY51110085
Agilent	N9020A / SIGNAL ANALYZER	07/02/2015	Annual	MY50510304
Agilent	N1911A/Power Meter	07/09/2015	Annual	MY45100523
Agilent	N1921A /POWER SENSOR	07/09/2015	Annual	MY45241059
Agilent	87300B/Directional Coupler	11/30/2015	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/15/2015	Annual	5001
Hewlett Packard	E3632A / DC Power Supply	03/09/2016	Annual	KR75303962
Agilent	8493C / Attenuator(10 dB)	07/23/2015	Annual	07560

## 10.2 LIST OF TEST EQUIPMENT (Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	10/10/2014	Biennial	3368
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
Schwarzbeck	BBHA 9120D/ Horn Antenna	05/07/2015	Biennial	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/30/2015	Biennial	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	01/15/2016	Annual	839117/011
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	06/29/2015	Annual	8
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	06/15/2015	Annual	1
Rohde & Schwarz	LOOP ANTENNA	02/04/2016	Biennial	100179
CERNEX	CBL18265035 / POWER AMP	07/27/2015	Annual	22966
CERNEX	CBL06185030 / POWER AMP	07/21/2015	Annual	22965
CERNEX	CBLU1183540 / POWER AMP	07/21/2015	Annual	22964