

FCC NFC REPORT

FCC Certification

Applicant Name:
SAMSUNG Electronics Co.,Ltd.

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 16677, Rep. of Korea

Date of Issue:

March 15, 2016

Test Site/Location:

HCT CO., LTD., 74,Seoicheon-ro 578beon-gil,Majang-myeo,Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-R-1603-F072

HCT FRN: 0005866421

IC Recognition No.: 5944A-5

FCC ID : A3LSMJ700T

APPLICANT : SAMSUNG Electronics Co.,Ltd.

Model(s): SM-J700T

Additional Model(s): SM-J700T1

EUT Type: Mobile Phone

RF Output Field Strength: 17.14dBuV/m @30 m

Frequency of Operation: 13.5602 MHz

Modulation type: ASK

FCC Classification: Low Power Communication Device – Transmitter

FCC Rule Part(s): FCC Part 15.225 Subpart C

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



Report prepared by
: Seoul Ki Lee
Test Engineer of RF Team



Approved by
: Sang Jun Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1603-F072	March 15, 2016	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
3.5 STANDARDS	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	7
5.1 FACILITIES	7
5.2 EQUIPMENT	7
6. ANTENNA REQUIREMENTS	7
7. MEASUREMENT UNCERTAINTY	8
8. TEST SUMMARY	9
9. RADIATED EMISSION MEASUREMENT	10
9.1. RADIATED EMISSION 9 kHz – 30 MHz	11
9.2. RADIATED EMISSION 30 MHz – 1000 MHz	14
10. EMISSION BANDWIDTH PLOT.....	16
11. FREQUENCY TOLERANCE	17
12. POWERLINE CONDUCTE EMISSIONS	22
13. LIST OF TEST EQUIPMENT	31
13.1 LIST OF TEST EQUIPMENT(Conducted Test)	31
13.2 LIST OF TEST EQUIPMENT(Radiated Test).....	32

1. GENERAL INFORMATION

Applicant: SAMSUNG Electronics Co.,Ltd.
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID: A3LSMJ700T
EUT Type: Mobile Phone
Model (s): SM-J700T
Additional Model (s) SM-J700T1
Date(s) of Tests: February 25, 2016 ~ March 14, 2016
Place of Tests: HCT Co., Ltd.
 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
 (IC Recognition No. : 5944A-5)

2. EUT DESCRIPTION

Model	SM-J700T
Additional Model	SM-J700T1
EUT Type	Mobile Phone
Power Supply	DC 3.8 V
Battery Information	Model: EB-BJ700BBU Type: Li-ion Battery
Frequency of Operation	13.5602 MHz
Transmit Power	17.14 dBuV/m @30 m
Modulation Type	ASK
Antenna Specification	Manufacturer: Exax. Antenna type: Loop Antenna

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10:2013).

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10. (Version: 2013).

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3.5 STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance With
 FCC Part 15.Subpart C

Regulation	Measurement standard	Range
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(a)	ANSI C63.10:2013	13.553MHz to 13.567MHz
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(d)	ANSI C63.10:2013	outside of the 13.110-14.010 MHz band
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2013	9kHz to 30MHz
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2013	30MHz to 1GHz
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.207	ANSI C63.10:2013	150kHz to 30MHz
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(e)	ANSI C63.10:2013	0.01% of nominal
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.215(c)	ANSI C63.10:2013	-

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

All equipments(spectrum, antenna, accessory, etc.) for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The 10 m semi anechoic chamber used to collect the Conducted and Radiated data is located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4 (Version: 2014). Detailed description of test facilities was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned loop, dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	6.07

8. TEST SUMMARY

The results in this report apply only to sample tested

Regulation	Test Type	Range	Result
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(a)	Radiated Electric Field Emissions	13.553MHz to 13.567MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(b)	Radiated Electric Field Emissions	13.410MHz to 13.553MHz and 13.567MHz to 13.710MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(c)	Radiated Electric Field Emission	13.110 MHz to 13.410 MHz and 13.710 MHz to 14.010 MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.209 (d)	Radiated Electric Field Emissions	9kHz to 30MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.209	Radiated Electric Field Emissions	30MHz to 1GHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.207	AC power conducted emissions	150kHz to 30MHz	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.225(e)	Frequency Stability	0.01% of nominal	Pass
Title 47 of the CFR: Part 15 Subpart (c), Clause 15.215(c)	20 dB Bandwidth	-	Pass

9. RADIATED EMISSION MEASUREMENT

Requirement(s): 15.209, 15.225

Except as provided elsewhere in this paragraph the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Minimum Standard: FCC Part 15.225 / 15.209

Rule Part	Frequency (MHz)	Limit
Part 15.209	0.009 ~ 0.490	2400/F(kHz) uV/m@300 m
	0.490 ~1.705	24000/F(kHz) uV/m@30 m
	1.705 ~ 30	30 uV/m@30 m
	30 ~ 88	100 ** uV/m@3 m
	88 ~ 216	150 ** uV/m@3 m
	216 ~ 960	200 ** uV/m@3 m
	Above 960	500 uV/m@3 m


** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

15.225 Operation within the band 13.110 – 14.010 MHz.

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter (= 84 dBuV/m) at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (=50.5dBuV/m) at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter (=40.5 dBuV/m) at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.
- (e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.
- (f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device.

9.1. RADIATED EMISSION 9 kHz – 30 MHz

Test Set-up

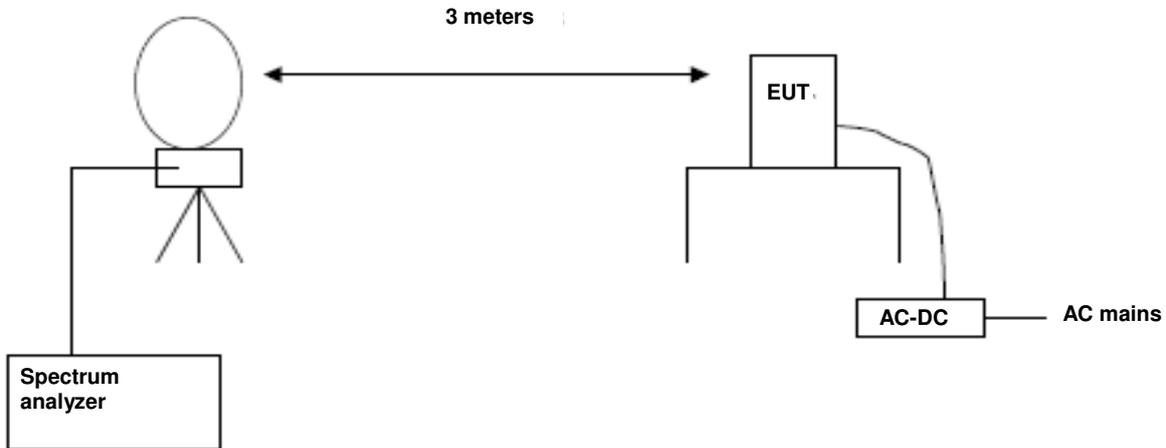

Test Procedure

The EUT was placed on a non-conductive table located on a large open test site. The loop antenna was placed at a location 3m from the EUT. Radiated emissions were measured with the loop antenna both parallel and perpendicular to the plane of the EUT loop antenna and with x, y, z planes in EUT.

The limit is converted from microvolts/meter to decibel microvolts/meter. Sample Calculation:

$$\text{Corrected Amplitude} = \text{Raw Amplitude(dB}\mu\text{V/m)} + \text{ACF(dB)} + \text{Cable Loss(dB)} - \text{Distance Correction Factor}$$

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 1 GHz

RBW = 9 kHz (9 kHz ~ 30 MHz)

= 120 kHz (30 MHz ~ 1 GHz)

Trace Mode = max hold

Detector Mode = peak / Quasi-peak

Sweep time = auto

■ Test Results (Worst case : y-H)

13.553 MHz-13.567 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5602(H)	37.65	19.49	-40.00	17.14	84.00	66.86
13.5605(V)	33.74	19.49	-40.00	13.23	84.00	70.77

13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.553	24.84	19.49	-40.00	4.33	50.47	46.14
13.567	26.01	19.49	-40.00	5.50	50.47	44.97

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.1376	18.20	19.49	-40.00	-2.31	40.51	42.82
13.9830	17.09	19.49	-40.00	-3.42	40.51	43.93

9 kHz -30 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
9.3286	18.05	19.98	-40.00	-1.97	29.54	31.51
15.9296	13.54	19.28	-40.00	-7.18	29.54	36.72
27.223	11.95	18.62	-40.00	-9.43	29.54	38.97
27.5617	11.43	18.62	-40.00	-9.95	29.54	39.49


Note : The test results for below 30 MHz is correlated to an open site.

The result on OATS is about 6.5 dB higher than semi-anechoic chamber(10 m chamber)

1. Distance Correction Below 30MHz = $40\log(3m/30m) = -40$ dB
Measurement Distance : 3 m (Below 30 MHz)
2. Factor = Antenna Factor + Cable Loss
3. Result Level = Read Level + Factor + Distance Correction
4. Margin = Limit – Result Level
5. We have done x, y, z planes in EUT
6. Antenna rotated about its vertical/horizontal axis for maximum response at each azimuth position around the EUT.
7. Worst case of operating mode is type A, analog mode and 106 kbps.

■ **RESULT PLOTS**

Radiated Emissions (9kHz~30MHz) plot

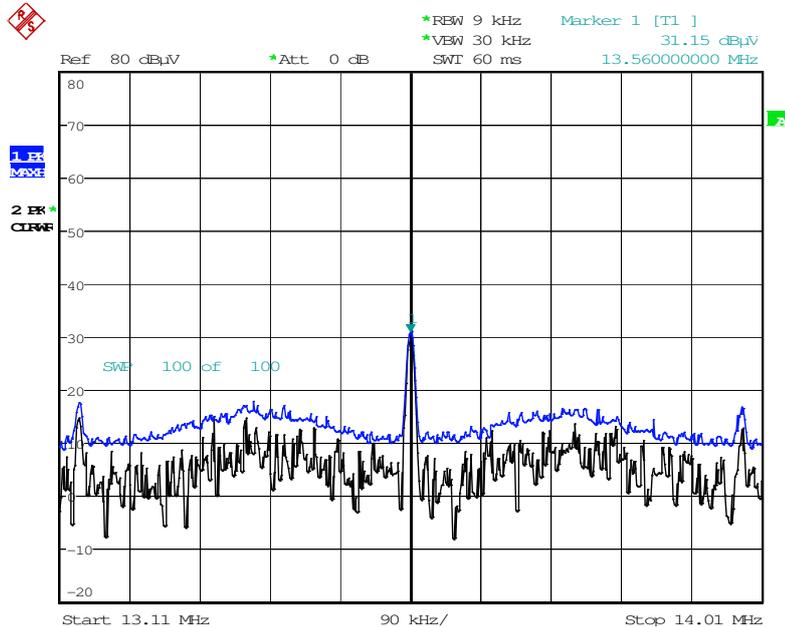


Date: 9.MAR.2016 16:03:13

Note : Only the worst case plots for Radiated Emissions.

9.2. RADIATED EMISSION 30 MHz – 1000 MHz

Test Set-up

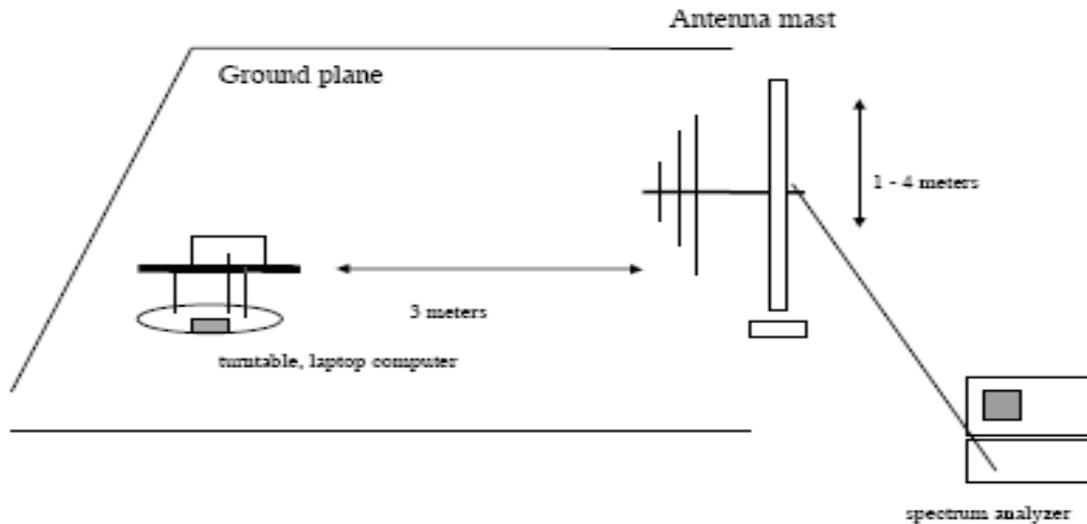

Test Procedures: Radiated emissions were measured according to ANSI C63.10.

The EUT was set to transmit at the highest output power.

The EUT was set 3 meter away from the measuring antenna.

■ Test Results


Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
*38.16	14.88	11.95	0.66	H	27.49	40.0	12.51
57.33	15.5	11.82	0.74	H	28.06	40.0	11.94
95.62	14.91	8.50	0.87	H	24.28	43.5	19.22
*133.7	14.8	12.24	1.01	H	28.05	43.5	15.45
142.54	14.51	12.84	1.03	H	28.38	43.5	15.12
*259.1	14.86	11.80	1.32	H	27.98	43.5	15.52

Remark

1. Result Level = Read Level + (Antenna Factor+ Cable Loss)
2. Margin = Limit – Result Level
3. '*' is the result for restricted band.

■ **RESULT PLOTS**

Radiated Emissions (30MHz~1000MHz) plot

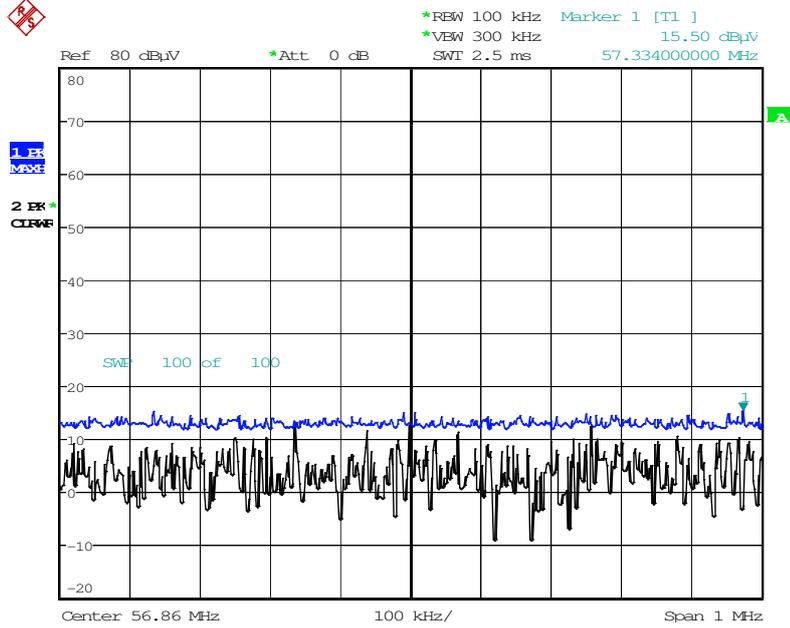

Date: 9.MAR.2016 16:44:26

Note : Only the worst case plots for Radiated Emissions.

10. EMISSION BANDWIDTH PLOT.

Requirement(s): Part 15.215(c).

Test Set-up: The EUT was connected to a spectrum analyzer.

Test Procedure: The 20 dB bandwidth was measured by using a spectrum analyzer.

RBW = Auto


VBW = Auto

Span = Adequately in the operating Tx.

Detector = Peak

Trace mode = Max hold

Allow the trace to stabilize

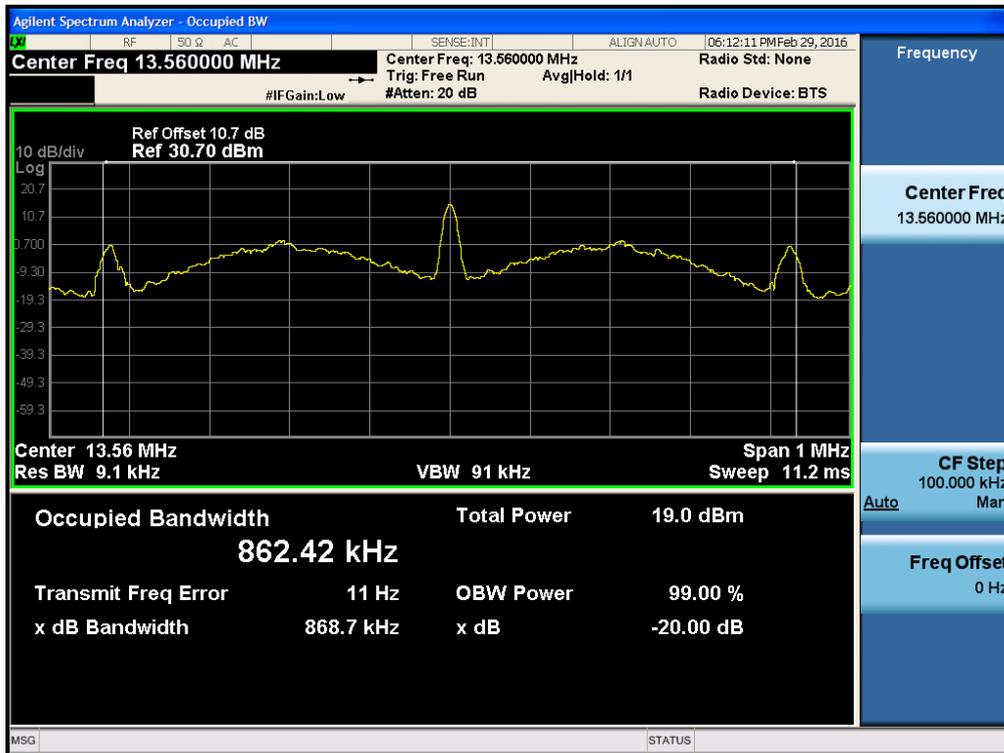

Note: We were performed the 20 dB bandwidth according to 15.215(c). In case of frequency stability, this EUT is no problem according to section 10.

11. FREQUENCY TOLERANCE

Procedure: Part 15.225, ANSI 63.10

If required, the operating or transmitting frequency of an intentional radiator should be measured in accordance with the following procedure to ensure that the device operates outside certain precluded frequency bands and within the frequency range. No modulation needs to be supplied to the intentional radiator during these tests, unless modulation is required to produce an output, e.g., single-sideband suppressed carrier transmitters.

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -20°C to + 50°C using an environmental chamber.
- b) For battery operated equipment, the equipment tests shall be performed using a new battery.
- c) Test Procedure
 - Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
 - Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
 - While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- d) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

Note : Below the measurement result is worst value of the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized

Measurement Result:

PERATING FREQUENCY: 13.56 MHz
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: 0.01% = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.8	-20	13.560159	159	0.0011726
100%		-10	13.560165	165	0.0012168
100%		0	13.560171	171	0.0012611
100%		+10	13.560178	178	0.0013127
100%		+20(Ref.)	13.560182	182	0.0013422
100%		+30	13.560187	187	0.0013791
100%		+40	13.560191	191	0.0014086
100%		+50	13.560196	196	0.0014454
115%	4.2	+20	13.560186	186	0.0013717
85%	3.7	+20	13.560184	184	0.0013569

Measurement Result:

OPERATING FREQUENCY: 13.56 MHz
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: 0.01% = 1356 Hz

2 minutes result

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.8	-20	13.560147	147	0.0010841
100%		-10	13.560142	142	0.0010472
100%		0	13.560138	138	0.0010177
100%		+10	13.560131	131	0.0009661
100%		+20(Ref.)	13.560124	124	0.0009145
100%		+30	13.560153	153	0.0011283
100%		+40	13.560172	172	0.0012684
100%		+50	13.560181	181	0.0013348
115%	4.2	+20	13.560176	176	0.0012979
85%	3.7	+20	13.560178	178	0.0013127

Measurement Result:

OPERATING FREQUENCY: 13.56 MHz
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: 0.01% = 1356 Hz

5 minutes result

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.8	-20	13.560101	101	0.0007448
100%		-10	13.560083	83	0.0006121
100%		0	13.560072	72	0.0005310
100%		+10	13.560061	61	0.0004499
100%		+20(Ref.)	13.560053	53	0.0003909
100%		+30	13.560041	41	0.0003024
100%		+40	13.560033	33	0.0002434
100%		+50	13.560025	25	0.0001844
115%	4.2	+20	13.560019	19	0.0001401
85%	3.7	+20	13.560016	16	0.0001180

Measurement Result:

OPERATING FREQUENCY: 13.56 MHz
 REFERENCE VOLTAGE: 3.85 VDC
 DEVIATION LIMIT: 0.01% = 1356 Hz

10 minutes result

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.8	-20	13.559927	-73	-0.0005383
100%		-10	13.559948	-52	-0.0003835
100%		0	13.559957	-43	-0.0003171
100%		+10	13.559969	-31	-0.0002286
100%		+20(Ref.)	13.559973	-27	-0.0001991
100%		+30	13.559968	-32	-0.0002360
100%		+40	13.559957	-43	-0.0003171
100%		+50	13.559965	-35	-0.0002581
115%	4.2	+20	13.559978	-22	-0.0001622
85%	3.7	+20	13.559985	-15	-0.0001106

12. POWERLINE CONDUCTE EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

Test Plots

Untermine the Antenna

Conducted Emissions (Line 1)

NFC MODE TERM N


1 / 2

HCT TEST Report

Common Information

EUT: SM-J700T
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC MODE _ UNTERMINATION
 Operator Name: SK LEE

FCC CLASS B

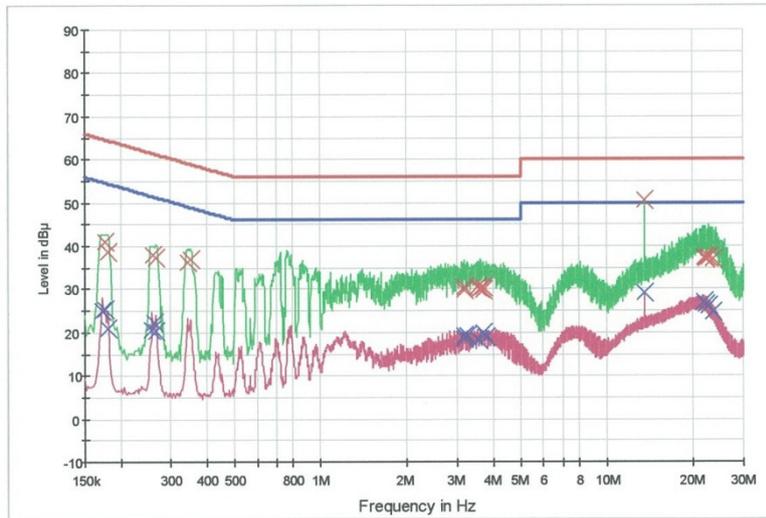

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.176000	40.9	9.000	Off	N	9.6	23.8	64.7
0.180000	38.7	9.000	Off	N	9.6	25.8	64.5
0.260000	38.0	9.000	Off	N	9.6	23.4	61.4
0.266000	37.3	9.000	Off	N	9.6	23.9	61.2
0.344000	36.4	9.000	Off	N	9.6	22.7	59.1
0.352000	36.9	9.000	Off	N	9.6	22.0	58.9
3.162000	30.5	9.000	Off	N	9.8	25.5	56.0
3.186000	29.7	9.000	Off	N	9.8	26.3	56.0
3.522000	30.4	9.000	Off	N	9.8	25.6	56.0
3.632000	30.2	9.000	Off	N	9.8	25.8	56.0
3.698000	29.7	9.000	Off	N	9.8	26.3	56.0
3.704000	30.4	9.000	Off	N	9.8	25.6	56.0
13.560000	50.7	9.000	Off	N	10.3	9.3	60.0
21.792000	37.4	9.000	Off	N	10.3	22.6	60.0
22.070000	37.3	9.000	Off	N	10.3	22.7	60.0
22.168000	37.0	9.000	Off	N	10.3	23.0	60.0
22.658000	37.4	9.000	Off	N	10.3	22.6	60.0
23.456000	36.9	9.000	Off	N	10.4	23.1	60.0

2016-03-12

오후 2:30:35

NFC MODE TERM N

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.172000	25.0	9.000	Off	N	9.6	29.9	54.9
0.176000	25.5	9.000	Off	N	9.6	29.2	54.7
0.180000	21.0	9.000	Off	N	9.6	33.5	54.5
0.258000	20.8	9.000	Off	N	9.6	30.7	51.5
0.262000	22.1	9.000	Off	N	9.6	29.2	51.4
0.266000	20.3	9.000	Off	N	9.6	31.0	51.2
3.162000	18.5	9.000	Off	N	9.8	27.5	46.0
3.186000	19.3	9.000	Off	N	9.8	26.7	46.0
3.270000	19.3	9.000	Off	N	9.8	26.7	46.0
3.566000	18.4	9.000	Off	N	9.8	27.6	46.0
3.698000	19.8	9.000	Off	N	9.8	26.2	46.0
3.796000	18.9	9.000	Off	N	9.8	27.1	46.0
13.560000	29.2	9.000	Off	N	10.3	20.8	50.0
21.784000	27.2	9.000	Off	N	10.3	22.8	50.0
21.792000	27.1	9.000	Off	N	10.3	22.9	50.0
22.070000	26.4	9.000	Off	N	10.3	23.6	50.0
22.658000	26.0	9.000	Off	N	10.3	24.0	50.0
23.456000	24.6	9.000	Off	N	10.4	25.4	50.0

2016-03-12

오후 2:30:35

Conducted Emissions (Line 2)

NFC MODE TERM L1


1 / 2

HCT TEST Report

Common Information

EUT: SM-J700T
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC MODE _ UNTERMINATION
 Operator Name: SK LEE

FCC CLASS B

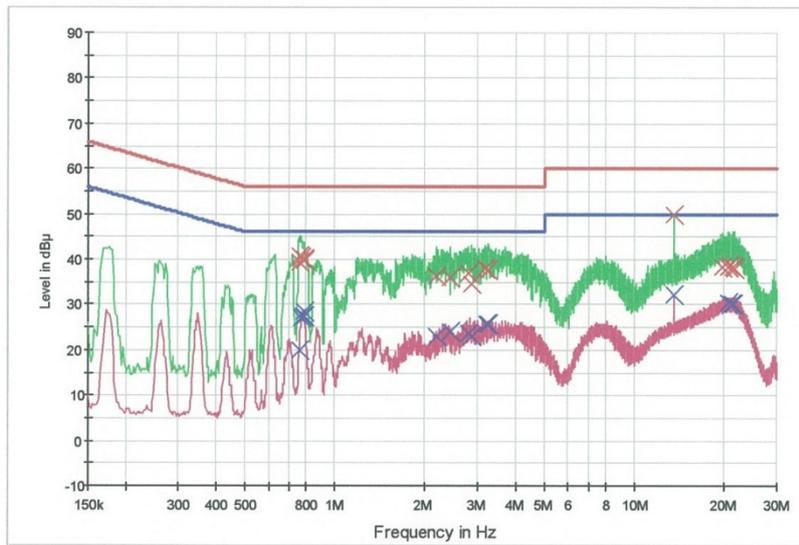

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG x Final Result 1-QPK x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.758000	40.5	9.000	Off	L1	9.7	15.5	56.0
0.762000	39.4	9.000	Off	L1	9.7	16.6	56.0
0.770000	40.4	9.000	Off	L1	9.7	15.6	56.0
0.774000	40.4	9.000	Off	L1	9.7	15.6	56.0
0.786000	40.1	9.000	Off	L1	9.7	15.9	56.0
0.790000	39.8	9.000	Off	L1	9.7	16.2	56.0
2.194000	36.3	9.000	Off	L1	9.8	19.7	56.0
2.432000	35.9	9.000	Off	L1	9.8	20.1	56.0
2.794000	37.0	9.000	Off	L1	9.8	19.0	56.0
2.856000	34.6	9.000	Off	L1	9.8	21.4	56.0
3.180000	38.1	9.000	Off	L1	9.8	17.9	56.0
3.270000	37.6	9.000	Off	L1	9.8	18.4	56.0
13.560000	49.8	9.000	Off	L1	10.2	10.2	60.0
19.750000	38.2	9.000	Off	L1	10.2	21.8	60.0
20.634000	38.3	9.000	Off	L1	10.3	21.7	60.0
20.914000	38.6	9.000	Off	L1	10.3	21.4	60.0
21.438000	38.4	9.000	Off	L1	10.3	21.6	60.0
21.534000	38.1	9.000	Off	L1	10.3	21.9	60.0

2016-03-12

오후 2:40:12

NFC MODE TERM L1

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.758000	20.0	9.000	Off	L1	9.7	26.0	46.0
0.770000	27.0	9.000	Off	L1	9.7	19.0	46.0
0.774000	27.2	9.000	Off	L1	9.7	18.8	46.0
0.778000	27.5	9.000	Off	L1	9.7	18.5	46.0
0.786000	28.5	9.000	Off	L1	9.7	17.5	46.0
0.790000	27.5	9.000	Off	L1	9.7	18.5	46.0
2.194000	22.9	9.000	Off	L1	9.8	23.1	46.0
2.432000	24.2	9.000	Off	L1	9.8	21.8	46.0
2.794000	23.8	9.000	Off	L1	9.8	22.2	46.0
2.856000	22.8	9.000	Off	L1	9.8	23.2	46.0
3.210000	25.6	9.000	Off	L1	9.8	20.4	46.0
3.270000	25.8	9.000	Off	L1	9.8	20.2	46.0
13.560000	32.0	9.000	Off	L1	10.2	18.0	50.0
20.634000	30.4	9.000	Off	L1	10.3	19.6	50.0
20.654000	30.4	9.000	Off	L1	10.3	19.6	50.0
21.008000	30.1	9.000	Off	L1	10.3	19.9	50.0
21.150000	30.3	9.000	Off	L1	10.3	19.7	50.0
21.438000	30.2	9.000	Off	L1	10.3	19.8	50.0

2016-03-12

오후 2:40:12

**Terminate the Antenna
Conducted Emissions (Line 1)**

Test


1 / 2

HCT TEST Report

Common Information

EUT: SM-J700T
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC MODE_ TERMINATION
 Operator Name: SK LEE

FCC CLASS B

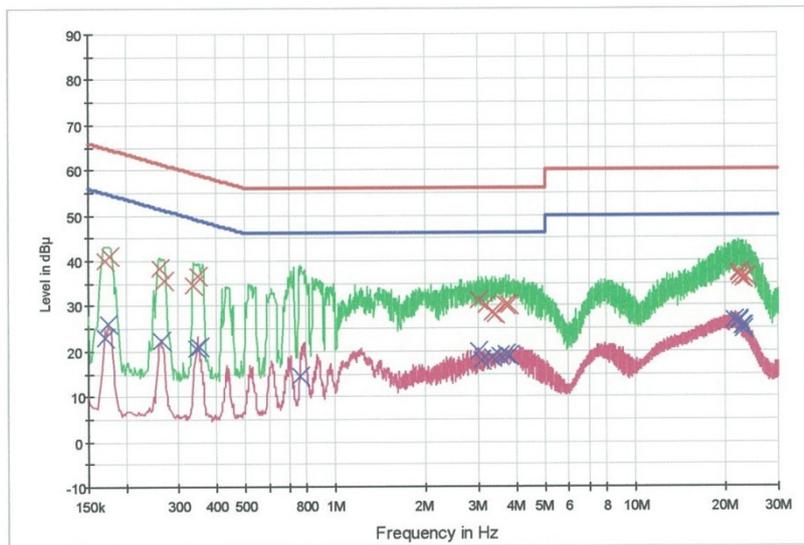

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG x Final Result 1-QPK x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.170000	40.0	9.000	Off	N	9.6	25.0	65.0
0.176000	41.1	9.000	Off	N	9.6	23.6	64.7
0.260000	38.1	9.000	Off	N	9.6	23.3	61.4
0.270000	35.6	9.000	Off	N	9.6	25.5	61.1
0.338000	34.6	9.000	Off	N	9.6	24.6	59.3
0.350000	36.5	9.000	Off	N	9.6	22.4	59.0
3.006000	31.0	9.000	Off	N	9.8	25.0	56.0
3.162000	30.0	9.000	Off	N	9.8	26.0	56.0
3.336000	28.4	9.000	Off	N	9.8	27.6	56.0
3.424000	28.2	9.000	Off	N	9.8	27.8	56.0
3.702000	30.1	9.000	Off	N	9.8	25.9	56.0
3.796000	30.0	9.000	Off	N	9.8	26.0	56.0
22.092000	36.8	9.000	Off	N	10.3	23.2	60.0
22.112000	37.2	9.000	Off	N	10.3	22.8	60.0
22.508000	36.3	9.000	Off	N	10.3	23.7	60.0
23.022000	35.8	9.000	Off	N	10.3	24.2	60.0
23.368000	36.2	9.000	Off	N	10.4	23.8	60.0
23.544000	36.1	9.000	Off	N	10.4	23.9	60.0

2016-03-12

오후 2:59:52

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.170000	23.1	9.000	Off	N	9.6	31.9	55.0
0.174000	26.1	9.000	Off	N	9.6	28.6	54.8
0.262000	22.2	9.000	Off	N	9.6	29.2	51.4
0.344000	20.5	9.000	Off	N	9.6	28.6	49.1
0.352000	21.1	9.000	Off	N	9.6	27.8	48.9
0.758000	14.5	9.000	Off	N	9.7	31.5	46.0
3.006000	19.9	9.000	Off	N	9.8	26.1	46.0
3.072000	17.9	9.000	Off	N	9.8	28.1	46.0
3.336000	18.6	9.000	Off	N	9.8	27.4	46.0
3.526000	18.9	9.000	Off	N	9.8	27.1	46.0
3.700000	19.1	9.000	Off	N	9.8	26.9	46.0
3.796000	18.8	9.000	Off	N	9.8	27.2	46.0
21.480000	26.6	9.000	Off	N	10.3	23.4	50.0
22.092000	26.3	9.000	Off	N	10.3	23.7	50.0
22.112000	26.6	9.000	Off	N	10.3	23.4	50.0
22.692000	25.2	9.000	Off	N	10.3	24.8	50.0
22.824000	25.2	9.000	Off	N	10.3	24.8	50.0
23.022000	24.5	9.000	Off	N	10.3	25.5	50.0

2016-03-12

오후 2:59:52

Conducted Emissions (Line 2)

Test


1 / 2

HCT TEST Report

Common Information

EUT: SM-J700T
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC MODE _ TERMINATION
 Operator Name: SK LEE

FCC CLASS B

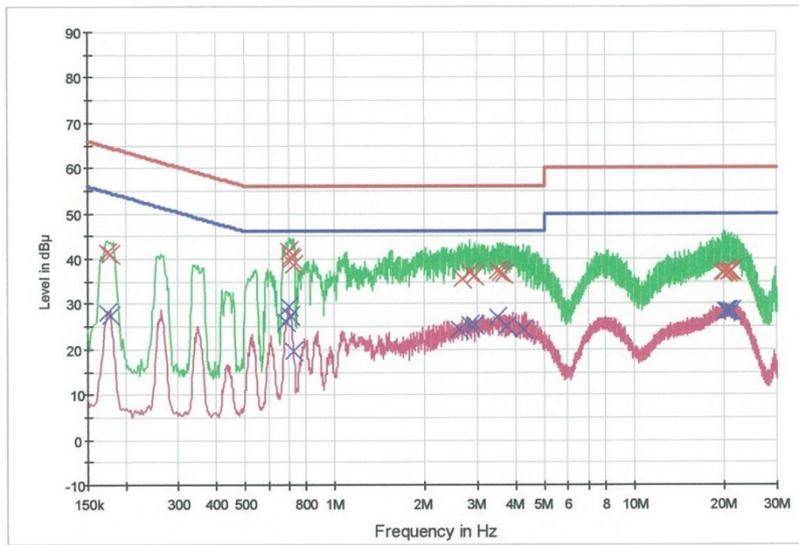

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.174000	41.4	9.000	Off	L1	9.6	23.4	64.8
0.178000	41.0	9.000	Off	L1	9.6	23.6	64.6
0.702000	41.7	9.000	Off	L1	9.7	14.3	56.0
0.714000	40.3	9.000	Off	L1	9.7	15.7	56.0
0.718000	39.9	9.000	Off	L1	9.7	16.1	56.0
0.730000	38.6	9.000	Off	L1	9.7	17.4	56.0
2.672000	35.5	9.000	Off	L1	9.8	20.5	56.0
2.820000	36.9	9.000	Off	L1	9.8	19.1	56.0
2.912000	36.2	9.000	Off	L1	9.8	19.8	56.0
3.504000	37.2	9.000	Off	L1	9.8	18.8	56.0
3.568000	36.9	9.000	Off	L1	9.8	19.2	56.0
3.642000	36.5	9.000	Off	L1	9.8	19.5	56.0
19.590000	37.0	9.000	Off	L1	10.2	23.0	60.0
19.968000	36.8	9.000	Off	L1	10.2	23.2	60.0
20.230000	37.3	9.000	Off	L1	10.3	22.7	60.0
20.712000	37.1	9.000	Off	L1	10.3	22.9	60.0
20.860000	37.2	9.000	Off	L1	10.3	22.8	60.0
21.192000	37.3	9.000	Off	L1	10.3	22.7	60.0

2016-03-12

오후 3:09:11

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.174000	28.3	9.000	Off	L1	9.6	26.5	54.8
0.178000	27.3	9.000	Off	L1	9.6	27.3	54.6
0.690000	26.0	9.000	Off	L1	9.7	20.0	46.0
0.702000	29.6	9.000	Off	L1	9.7	16.4	46.0
0.712000	27.5	9.000	Off	L1	9.7	18.5	46.0
0.728000	19.6	9.000	Off	L1	9.7	26.4	46.0
2.596000	24.5	9.000	Off	L1	9.8	21.5	46.0
2.820000	25.3	9.000	Off	L1	9.8	20.7	46.0
2.912000	25.4	9.000	Off	L1	9.8	20.6	46.0
3.504000	26.9	9.000	Off	L1	9.8	19.1	46.0
3.734000	25.0	9.000	Off	L1	9.8	21.0	46.0
4.238000	24.3	9.000	Off	L1	9.8	21.7	46.0
20.230000	28.4	9.000	Off	L1	10.3	21.6	50.0
20.312000	28.4	9.000	Off	L1	10.3	21.6	50.0
20.350000	28.4	9.000	Off	L1	10.3	21.6	50.0
20.658000	28.5	9.000	Off	L1	10.3	21.5	50.0
21.172000	28.3	9.000	Off	L1	10.3	21.7	50.0
21.192000	28.4	9.000	Off	L1	10.3	21.6	50.0

2016-03-12

오후 3:09:11

13. LIST OF TEST EQUIPMENT

13.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	12/28/2015	Annual	100073
Agilent	E4440A/ Spectrum Analyzer	03/18/2015	Annual	US45303008
Agilent	N9020A / SIGNAL ANALYZER	06/30/2015	Annual	MY51110085
Agilent	N9020A / SIGNAL ANALYZER	07/02/2015	Annual	MY50510304
Agilent	N1911A/Power Meter	07/09/2015	Annual	MY45100523
Agilent	N1921A /POWER SENSOR	07/09/2015	Annual	MY45241059
Agilent	87300B/Directional Coupler	11/30/2015	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/15/2015	Annual	5001
Hewlett Packard	E3632A / DC POWER SUPPLY	03/09/2016	Annual	KR75303962
Agilent	8493C / Attenuator(10 dB)	07/23/2015	Annual	07560
ESPAC.	SH-642 / Temp & Humidity Chamber	07/23/2015	Annual	93000717

13.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	10/10/2014	Biennial	3368
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
CERNEX	CBL18265035 / POWER AMP	07/27/2015	Annual	22966
Schwarzbeck	BBHA 9120D/ Horn Antenna	05/07/2015	Biennial	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/30/2015	Biennial	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	01/15/2016	Annual	839117/011
Rohde & Schwarz	LOOP ANTENNA	02/04/2016	Biennial	100179
CERNEX	CBL06185030 / POWER AMP	07/21/2015	Annual	22965
CERNEX	CBLU1183540 / POWER AMP	07/21/2015	Annual	22964