



SAR EVALUATION REPORT

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro, Maetan dong,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do, 16677, Korea

Date of Testing:
 03/18/18 - 04/05/18
Test Site/Location:
 PCTEST Lab, Columbia, MD, USA
Document Serial No.:
 1M1803120038-01-R1.A3L

FCC ID: A3LSMJ737V

APPLICANT: SAMSUNG ELECTRONICS CO., LTD.

DUT Type: Portable Handset
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Model: SM-J737V
Additional Model(s): SM-J737VPP, SM-S767VL

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)	10g Phablet (W/kg)
PCE	Cell. CDMA/EVDO	824.70 - 848.31 MHz	0.34	0.48	0.50	N/A
PCE	PCS CDMA/EVDO	1851.25 - 1908.75 MHz	0.80	0.79	0.85	3.27
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.23	0.37	0.50	N/A
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	0.60	0.29	0.78	N/A
PCE	UMTS 850	826.40 - 846.60 MHz	0.27	0.34	0.39	N/A
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.70	0.58	0.82	2.32
PCE	LTE Band 13	779.5 - 784.5 MHz	0.38	0.57	0.62	N/A
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.34	0.47	0.53	N/A
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	0.73	0.53	0.71	3.05
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	0.91	0.81	1.01	3.25
PCE	LTE Band 7	2502.5 - 2567.5 MHz	0.58	0.52	0.91	2.61
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.81	< 0.1	0.19	N/A
NII	U-NII-1	5180 - 5240 MHz	N/A	N/A	N/A	N/A
NII	U-NII-2A	5260 - 5320 MHz	0.99	0.21	N/A	1.01
NII	U-NII-2C	5500 - 5720 MHz	0.93	0.26	N/A	1.34
NII	U-NII-3	5745 - 5825 MHz	0.81	0.23	0.46	N/A
DSS/DTS	Bluetooth	2402 - 2480 MHz	N/A	N/A	N/A	N/A
Simultaneous SAR per KDB 690783 D01v01r03:			1.59	1.07	1.46	3.98

Note: This revised Test Report (S/N: 1M1803120038-01-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

Randy Ortanez
 President





The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 1 of 93	

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	10
3	INTRODUCTION	11
4	DOSIMETRIC ASSESSMENT	12
5	DEFINITION OF REFERENCE POINTS	13
6	TEST CONFIGURATION POSITIONS	14
7	RF EXPOSURE LIMITS	18
8	FCC MEASUREMENT PROCEDURES.....	19
9	RF CONDUCTED POWERS	26
10	SYSTEM VERIFICATION.....	52
11	SAR DATA SUMMARY	56
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	74
13	SAR MEASUREMENT VARIABILITY	88
14	EQUIPMENT LIST.....	89
15	MEASUREMENT UNCERTAINTIES.....	90
16	CONCLUSION.....	91
17	REFERENCES	92
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: POWER REDUCTION VERIFICATION		

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 2 of 93	

1 DEVICE UNDER TEST



1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
Cell. CDMA/EVDO	Voice/Data	824.70 - 848.31 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 7	Voice/Data	2502.5 - 2567.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
ANT+	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

This device utilizes a power reduction mechanism for some wireless modes and bands for SAR compliance under portable hotspot conditions, under held-to-ear conditions during voice or VOIP scenarios, and under some conditions when the device is being used in close proximity to the user's hand. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when hotspot is enabled. Held-to-ear exposure conditions were evaluated at reduced power for the applicable modes per FCC guidance. Additionally, FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device when being used in phablet use conditions. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 3 of 93	

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

1.3.1 Maximum Output Power



Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.0	33.0	31.0	29.0	28.0	26.5	25.0	24.0	23.0
	Nominal	32.0	32.0	30.0	28.0	27.0	25.5	24.0	23.0	22.0
GSM/GPRS/EDGE 1900	Maximum	30.0	30.0	28.0	26.0	24.0	26.5	24.5	23.0	22.5
	Nominal	29.0	29.0	27.0	25.0	23.0	25.5	23.5	22.0	21.5

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Maximum	24.0	23.5	23.5
	Nominal	23.0	22.5	22.5
UMTS Band 2 (1900 MHz)	Maximum	23.0	23.0	23.0
	Nominal	22.0	22.0	22.0

Mode / Band		Modulated Average (dBm)		
		1x-RTT	EVDO Rev 0	EVDO Rev A
Cell. CDMA/EVDO	Maximum	25.5	25.0	25.0
	Nominal	24.5	24.0	24.0
PCS CDMA/EVDO	Maximum	24.5	24.5	24.5
	Nominal	23.5	23.5	23.5

Mode / Band		Modulated Average (dBm)
LTE Band 13	Maximum	24.5
	Nominal	23.5
LTE Band 5 (Cell)	Maximum	25.5
	Nominal	24.5
LTE Band 4 (AWS)	Maximum	24.5
	Nominal	23.5
LTE Band 2 (PCS)	Maximum	24.5
	Nominal	23.5
LTE Band 7	Maximum	23.5
	Nominal	22.5

Mode / Band		Modulated Average (dBm)		
		Ch. 1	Ch. 2-10	Ch. 11
IEEE 802.11b (2.4 GHz)	Maximum	16.0		
	Nominal	15.0		
IEEE 802.11g (2.4 GHz)	Maximum	14.0	16.0	14.0
	Nominal	13.0	15.0	13.0
IEEE 802.11n (2.4 GHz)	Maximum	14.0	16.0	14.0
	Nominal	13.0	15.0	13.0

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 4 of 93	

Mode / Band		Modulated Average (dBm)									
		20 MHz Bandwidth		40 MHz Bandwidth				80 MHz Bandwidth			
		Ch 36, 64, 100, 165	Ch 40-60, 104-161	Ch 38	Ch 62	Ch 102, 159	Ch 46-54, 110-151	Ch 42	Ch 58	Ch 106	Ch 122-155
IEEE 802.11a (5 GHz)	Maximum	14.0	16.0								
	Nominal	13.0	15.0								
IEEE 802.11n (5 GHz)	Maximum	14.0	16.0	10.0	9.0	12.0	14.0				
	Nominal	13.0	15.0	9.0	8.0	11.0	13.0				
IEEE 802.11ac (5 GHz)	Maximum	14.0	16.0	10.0	9.0	12.0	14.0	9.0	8.0	8.5	11.0
	Nominal	13.0	15.0	9.0	8.0	11.0	13.0	8.0	7.0	7.5	10.0

Mode / Band		Modulated Average (dBm)
Bluetooth	Maximum	9.0
	Nominal	8.0
Bluetooth LE	Maximum	6.0
	Nominal	5.0



1.3.2 Reduced Output Power

Mode / Band		Voice (dBm)
		1 TX Slot
GSM 1900	Maximum	29.0
	Nominal	28.0

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 2 (1900 MHz)	Maximum	21.5	21.5	21.5
	Nominal	20.5	20.5	20.5

Mode / Band		Modulated Average (dBm)
PCS CDMA/EVDO	Maximum	21.5
	Nominal	20.5

Mode / Band		Modulated Average (dBm)
LTE Band 4 (AWS)	Maximum	22.5
	Nominal	21.5
LTE Band 2 (PCS)	Maximum	22.5
	Nominal	21.5
LTE Band 7	Maximum	22.5
	Nominal	21.5

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 5 of 93	

Mode / Band		Modulated Average (dBm)							
		20 MHz Bandwidth		40 MHz Bandwidth			80 MHz Bandwidth		
		Ch 36-165	Ch 38	Ch 62	Ch 46-54, 102-159	Ch 42	Ch 58	Ch 106	Ch 122-155
IEEE 802.11a (5 GHz)	Maximum	12.0							
	Nominal	11.0							
IEEE 802.11n (5 GHz)	Maximum	12.0	10.0	9.0	12.0				
	Nominal	11.0	9.0	8.0	11.0				
IEEE 802.11ac (5 GHz)	Maximum	12.0	10.0	9.0	12.0	9.0	8.0	8.5	11.0
	Nominal	11.0	9.0	8.0	11.0	8.0	7.0	7.5	10.0

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”

**Table 1-1
Device Edges/Sides for SAR Testing**



Mode	Back	Front	Top	Bottom	Right	Left
Cell. EVDO	Yes	Yes	No	Yes	Yes	Yes
PCS EVDO	Yes	Yes	No	Yes	Yes	Yes
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1900	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 4 (AWS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 2 (PCS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 7	Yes	Yes	No	Yes	Yes	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	Yes	Yes
5 GHz WLAN	Yes	Yes	Yes	No	Yes	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR or phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-1, U-NII-2A, U-NII-2C operations are disabled. Therefore, U-NII-1, U-NII-2A, U-NII-2C operations are not considered in this section.

1.5 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 6 of 93	

**Table 1-2
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	1x CDMA voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
2	1x CDMA voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
3	1x CDMA voice + 2.4 GHz Bluetooth	Yes [^]	Yes	N/A	Yes	[^] Bluetooth Tethering is considered
4	GSM voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
5	GSM voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
6	GSM voice + 2.4 GHz Bluetooth	Yes [^]	Yes	N/A	Yes	[^] Bluetooth Tethering is considered
7	UMTS + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
8	UMTS + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
9	UMTS + 2.4 GHz Bluetooth	Yes [^]	Yes	Yes [^]	Yes	[^] Bluetooth Tethering is considered
10	LTE + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
11	LTE + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
12	LTE + 2.4 GHz Bluetooth	Yes [^]	Yes	Yes [^]	Yes	[^] Bluetooth Tethering is considered
13	CDMA/EVDO data + 2.4 GHz Wi-Fi	Yes [*]	Yes [*]	Yes	Yes	[*] Pre-installed VOIP applications are considered
14	CDMA/EVDO data + 5 GHz Wi-Fi	Yes [*]	Yes [*]	Yes	Yes	[*] Pre-installed VOIP applications are considered
15	CDMA/EVDO data + 2.4 GHz Bluetooth	Yes ^{**}	Yes [*]	Yes [^]	Yes	[*] Pre-installed VOIP applications are considered [^] Bluetooth Tethering is considered
16	GPRS/EDGE + 2.4 GHz Wi-Fi	N/A	N/A	Yes	Yes	
17	GPRS/EDGE + 5 GHz Wi-Fi	N/A	N/A	Yes	Yes	
18	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	N/A	Yes [^]	Yes	[^] Bluetooth Tethering is considered

- 2.4 GHz WLAN, 5 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
- 5 GHz Wireless Router is only supported for the U-NII-3 by S/W, therefore U-NII-1, U-NII2A, and U-NII2C were not evaluated for wireless router conditions.
- This device supports VOLTE.
- This device supports VoWIFI.

1.6 Miscellaneous SAR Test Considerations



(A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A & U-NII-2C WIFI, only 2.4 GHz and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 7 of 93	

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, head Bluetooth SAR was not required; $[(8/5) * \sqrt{2.480}] = 2.5 < 3.0$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn Bluetooth SAR was not required; $[(8/15) * \sqrt{2.480}] = 0.8 < 3.0$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, hotspot Bluetooth SAR was not required; $[(8/10) * \sqrt{2.480}] = 1.3 < 3.0$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB 447498 D01v06, the 10g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 7.5$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, phablet Bluetooth SAR was not required; $[(8/5) * \sqrt{2.480}] = 2.5 < 7.5$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 1 Tx antenna output
- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-1, U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.



(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1x Advanced was not more than 0.25 dB higher than the maximum powers for 1x and the measured SAR in any 1x mode exposure conditions was not greater than 1.2 W/kg per FCC KDB Publication 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 8 of 93	

This device supports LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.



Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information)

1.7 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- FCC KDB Publication 616217 D04v01r02 (Proximity Sensor)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- Fall 2018 TCB Workshop Notes (LTE Carrier Aggregation)

1.8 Device Serial Numbers



Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 9 of 93

2

LTE INFORMATION

LTE Information			
FCC ID	A3LSMJ737V		
Form Factor	Portable Handset		
Frequency Range of each LTE transmission band	LTE Band 13 (779.5 - 784.5 MHz)		
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)		
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)		
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)		
	LTE Band 7 (2502.5 - 2567.5 MHz)		
Channel Bandwidths	LTE Band 13: 5 MHz, 10 MHz		
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz		
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz		
Channel Numbers and Frequencies (MHz)	Low	Mid	High
LTE Band 13: 5 MHz	779.5 (23205)	782 (23230)	784.5 (23255)
LTE Band 13: 10 MHz	N/A	782 (23230)	N/A
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)
LTE Band 7: 5 MHz	2502.5 (20775)	2535 (21100)	2567.5 (21425)
LTE Band 7: 10 MHz	2505 (20800)	2535 (21100)	2565 (21400)
LTE Band 7: 15 MHz	2507.5 (20825)	2535 (21100)	2562.5 (21375)
LTE Band 7: 20 MHz	2510 (20850)	2535 (21100)	2560 (21350)
UE Category	6		
Modulations Supported in UL	QPSK, 16QAM		
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	YES		
A-MPR (Additional MPR) disabled for SAR Testing?	YES		
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations		
LTE Additional Information	This device does not support full CA features on 3GPP Release 10. It supports a maximum of 2 carriers in the downlink. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 10 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WiFi Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.		

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 10 of 93	

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 11 of 93	

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{area}, \Delta y_{area}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{zoom}, \Delta y_{zoom}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)^*$	$\Delta z_{zoom}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{zoom}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset			Page 12 of 93

5 DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

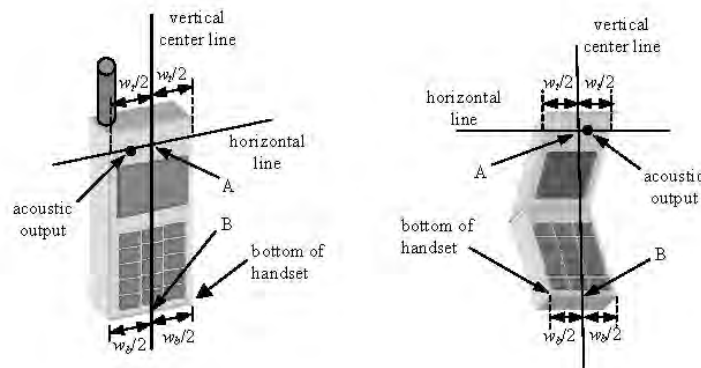




Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 13 of 93

6 TEST CONFIGURATION POSITIONS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).



FCC ID: A3LSMJ737V	 PCTEST PROTECTIONS LABORATORY, INC.	SAR EVALUATION REPORT	 SAMSUNG	Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 14 of 93



Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3 Side view w/ relevant markings

6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

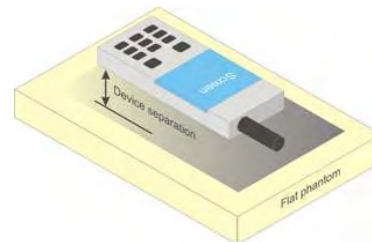




Figure 6-4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 15 of 93

contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person’s face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Extremity Exposure Configurations



Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user’s body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 16 of 93	

6.8 Phablet Configurations



For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna <=25 mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR > 1.2 W/kg.

6.9 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included in Appendix G.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 17 of 93

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 18 of 93	

8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”



The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

8.4.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.” Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the “All Up” condition.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 19 of 93

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH₀ and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH₀ data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

Table 8-1
Parameters for Max. Power for RC1

Parameter	Units	Value
$\frac{I_{or}}{I_{or}}$	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

Table 8-2
Parameters for Max. Power for RC3

Parameter	Units	Value
$\frac{I_{or}}{I_{or}}$	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at fullrate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

Head SAR is additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section 8.4.5 for EVDO Rev. A configuration parameters.

8.4.3 Body-worn SAR Measurements



SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH_n), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH_n), with FCH at full rate and SCH₀ enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

The 3G SAR test reduction procedure is applied to body-worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

8.4.4 Body-worn SAR Measurements for EVDO Devices

For handsets with EVDO capabilities, the 3G SAR test reduction procedure is applied to EVDO Rev. 0 with 1x RTT RC3 as the primary mode to determine body-worn accessory test requirements. Otherwise, body-worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied to Rev. A, with Rev. 0 as the primary mode to determine body-worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 20 of 93	

When SAR is required for EVDO Rev. A, SAR is measured with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations, using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0 or 1x RTT RC3, as appropriate.

8.4.5 Body SAR Measurements for EVDO Hotspot

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode; otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

For EVDO data devices that also support 1x RTT voice and/or data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with EVDO Rev. 0 and Rev. A as the respective primary modes. Otherwise, the 'Body-Worn Accessory SAR' procedures in the '3GPP2 CDMA 2000 1x Handsets' section are applied.

8.4.6 CDMA2000 1x Advanced

This device additionally supports 1x Advanced. Conducted powers are measured using SO75 with RC8 on the uplink and RC11 on the downlink per FCC KDB Publication 941225 D01v03r01. Smart blanking is disabled for all measurements. The EUT is configured with forward power control Mode 000 and reverse power control at 400 bps. Conducted powers are measured on an Agilent 8960 Series 10 Wireless Communications Test Set, Model E5515C using the CDMA2000 1x Advanced application, Option E1962B-410.

The 3G SAR test reduction procedure is applied to the 1x-Advanced transmission mode with 1x RTT RC3 as the primary mode. When SAR measurement is required, the 1x-Advanced power measurement configurations are used. The 1x Advanced SAR procedures are applied separately to head, body-worn accessory and other exposure conditions.



8.5 SAR Measurement Conditions for UMTS

8.5.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.5.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 21 of 93	

8.5.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

8.5.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

8.5.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.6 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.6.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.6.2 MPR



MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.6.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.6.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 22 of 93

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.6.5 Downlink Only Carrier Aggregation



Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

8.7 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

8.7.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

FCC ID: A3LSMJ737V	 PCTEST PROTECTIONS LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 23 of 93	

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.7.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

8.7.4 Initial Test Position Procedure



For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 24 of 93	

required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.



8.7.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.7.6). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.7.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 25 of 93	

9 RF CONDUCTED POWERS

9.1 CDMA Conducted Powers


**Table 9-1
Maximum Conducted Power**

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SCH	FCH	(RTAP)	(RETAP)
Cellular	1013	22H	824.7	24.37	24.33	24.40	24.33	24.34	23.79	23.81
	384	22H	836.52	24.28	24.26	24.32	24.25	24.28	23.70	23.76
	777	22H	848.31	23.87	23.84	23.88	23.82	23.89	23.68	23.70
PCS	25	24E	1851.25	23.83	23.80	23.85	23.81	23.82	23.76	23.82
	600	24E	1880	23.77	23.74	23.81	23.75	23.76	23.68	23.74
	1175	24E	1908.75	23.86	23.87	23.92	23.87	23.89	23.81	23.88

Note: RC1 is only applicable for IS-95 compatibility.

**Table 9-2
Reduced Conducted Power**

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SCH	FCH	(RTAP)	(RETAP)
PCS	25	24E	1851.25	20.49	20.48	20.51	20.43	20.47	20.44	20.48
	600	24E	1880	20.44	20.41	20.45	20.39	20.41	20.37	20.39
	1175	24E	1908.75	20.56	20.54	20.57	20.55	20.56	20.49	20.52



**Figure 9-1
Power Measurement Setup**

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 26 of 93



9.2 GSM Conducted Powers

Table 9-3
Maximum Conducted Power

Maximum Burst-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	31.89	31.96	29.61	28.65	27.46	26.15	24.98	23.49	22.36
	190	31.92	31.97	29.53	28.48	27.66	25.96	24.78	23.48	22.31
	251	31.84	31.91	29.49	28.63	27.81	26.25	24.80	23.56	22.17
GSM 1900	512	28.99	28.92	26.54	24.90	23.47	25.44	23.49	22.16	21.39
	661	28.97	28.91	26.56	25.15	23.56	25.42	23.42	22.14	21.35
	810	29.36	29.37	26.61	25.39	23.95	25.91	23.32	22.61	21.76

Calculated Maximum Frame-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	22.86	22.93	23.59	24.39	24.45	17.12	18.96	19.23	19.35
	190	22.89	22.94	23.51	24.22	24.65	16.93	18.76	19.22	19.30
	251	22.81	22.88	23.47	24.37	24.80	17.22	18.78	19.30	19.16
GSM 1900	512	19.96	19.89	20.52	20.64	20.46	16.41	17.47	17.90	18.38
	661	19.94	19.88	20.54	20.89	20.55	16.39	17.40	17.88	18.34
	810	20.33	20.34	20.59	21.13	20.94	16.88	17.30	18.35	18.75

GSM 850	Frame Avg.Targets:	22.97	22.97	23.98	23.74	23.99	17.47	18.98	18.74	18.99
GSM 1900		19.97	19.97	20.98	20.74	19.99	16.47	17.48	17.74	18.49

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT					Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset				Page 27 of 93	

**Table 9-4
Reduced Conducted Power**

Maximum Burst-Averaged Output Power		
Band	Channel	Voice GSM [dBm] CS (1 Slot)
GSM 1900	512	27.65
	661	27.84
	810	27.87


Calculated Maximum Frame-Averaged Output Power		
Band	Channel	Voice GSM [dBm] CS (1 Slot)
GSM 1900	512	18.62
	661	18.81
	810	18.84

GSM 1900	Frame Avg.Targets:	18.97
----------	--------------------	-------



Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: B
GPRS Multislot class: 33 (Max 4 Tx uplink slots)
EDGE Multislot class: 33 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A



**Figure 9-2
Power Measurement Setup**

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 28 of 93	

9.3 UMTS Conducted Powers

**Table 9-5
Maximum Conducted Power**


3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	22.73	22.88	22.69	22.55	22.31	22.51	-
99		12.2 kbps AMR	22.75	22.83	22.65	22.53	22.28	22.48	-
6	HSDPA	Subtest 1	22.39	22.88	22.67	22.46	22.21	22.42	0
6		Subtest 2	22.05	22.20	21.90	22.53	22.27	22.47	0
6		Subtest 3	22.06	22.19	21.88	22.49	22.22	22.51	0.5
6		Subtest 4	21.18	21.14	21.05	22.44	22.20	22.53	0.5
6	HSUPA	Subtest 1	21.80	21.98	21.76	21.63	21.41	21.57	0
6		Subtest 2	20.08	20.14	19.80	20.04	19.81	20.16	2
6		Subtest 3	21.80	21.98	20.75	21.69	21.47	21.66	1
6		Subtest 4	20.07	20.21	19.88	20.05	19.68	20.03	2
6		Subtest 5	22.73	22.87	22.66	22.44	22.22	22.38	0

**Table 9-6
Reduced Conducted Power**

3GPP Release Version	Mode	3GPP 34.121 Subtest	PCS Band [dBm]			3GPP MPR [dB]
			9262	9400	9538	
99	WCDMA	12.2 kbps RMC	21.12	20.87	21.19	-
99		12.2 kbps AMR	21.11	20.87	21.17	-
6	HSDPA	Subtest 1	20.84	20.88	21.11	0
6		Subtest 2	21.21	20.93	21.19	0
6		Subtest 3	21.19	20.92	21.25	0.5
6		Subtest 4	21.20	20.98	21.26	0.5
6	HSUPA	Subtest 1	20.16	19.90	20.26	0
6		Subtest 2	20.06	19.81	20.25	2
6		Subtest 3	20.20	19.94	20.23	1
6		Subtest 4	20.02	19.78	20.31	2
6		Subtest 5	20.98	20.85	21.12	0

This device does not support DC-HSDPA.

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.

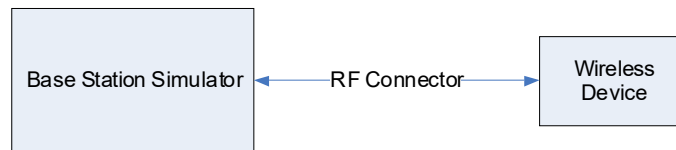

**Figure 9-3
Power Measurement Setup**

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 29 of 93	

9.4 LTE Conducted Powers

9.4.1 LTE Band 13



Table 9-7
LTE Band 13 Conducted Powers - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.74	0	0
	1	25	23.67		0
	1	49	23.67		0
	25	0	22.23	0-1	1
	25	12	22.20		1
	25	25	22.19		1
	50	0	22.20		1
16QAM	1	0	22.74	0-1	1
	1	25	22.74		1
	1	49	22.61		1
	25	0	21.18	0-2	2
	25	12	21.09		2
	25	25	21.12		2
	50	0	21.19		2

Table 9-8
LTE Band 13 Conducted Powers - 5 MHz Bandwidth

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.70	0	0
	1	12	23.62		0
	1	24	23.66		0
	12	0	22.27	0-1	1
	12	6	22.21		1
	12	13	22.25		1
	25	0	22.23		1
16QAM	1	0	22.68	0-1	1
	1	12	22.71		1
	1	24	22.65		1
	12	0	21.27	0-2	2
	12	6	21.28		2
	12	13	21.25		2
	25	0	21.28		2

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 30 of 93

9.4.2

LTE Band 5 (Cell)

Table 9-9
LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 5 (Cell) 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			20525 (836.5 MHz)			
			Conducted Power [dBm]			
QPSK	1	0	24.32	0	0	
	1	25	24.32		0	
	1	49	24.20		0	
	QPSK	25	0	22.97	0-1	1
		25	12	22.96		1
		25	25	22.96		1
		50	0	22.88		1
16QAM	1	0	23.44	0-1	1	
	1	25	23.31		1	
	1	49	23.33		1	
	16QAM	25	0	22.27	0-2	2
		25	12	22.24		2
		25	25	22.19		2
		50	0	22.21		2

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-10
LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth

LTE Band 5 (Cell) 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	24.35	24.29	24.05	0	0	
	1	12	24.35	24.31	24.06		0	
	1	24	24.36	24.28	24.01		0	
	QPSK	12	0	23.01	22.93	22.69	0-1	1
		12	6	22.99	22.93	22.68		1
		12	13	22.98	22.94	22.67		1
		25	0	23.01	22.96	22.71		1
16QAM	1	0	23.21	23.23	22.96	0-1	1	
	1	12	23.31	23.22	22.98		1	
	1	24	23.30	23.16	22.97		1	
	16QAM	12	0	22.23	22.12	21.91	0-2	2
		12	6	22.23	22.11	21.88		2
		12	13	22.22	22.11	21.88		2
		25	0	22.22	22.18	21.92		2





FCC ID: A3LSMJ737V		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 31 of 93	

Table 9-11
LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth

LTE Band 5 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.41	24.24	23.87	0	0
	1	7	24.42	24.28	23.82		0
	1	14	24.37	24.28	23.89		0
	8	0	22.90	22.95	22.45	0-1	1
	8	4	22.86	22.96	22.41		1
	8	7	22.91	22.93	22.39		1
	15	0	22.92	22.94	22.45		1
16QAM	1	0	23.38	23.36	22.92	0-1	1
	1	7	23.49	23.37	22.87		1
	1	14	23.43	23.31	22.91		1
	8	0	22.08	22.10	21.61	0-2	2
	8	4	22.09	22.09	21.56		2
	8	7	22.04	22.06	21.54		2
	15	0	22.05	22.07	21.50		2

Table 9-12
LTE Band 5 (Cell) Conducted Powers -1.4 MHz Bandwidth

LTE Band 5 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.36	24.51	23.81	0	0
	1	2	24.27	24.49	23.80		0
	1	5	24.37	24.52	23.80		0
	3	0	24.24	24.29	23.78		0
	3	2	24.27	24.31	23.77		0
	3	3	24.28	24.33	23.76		0
	6	0	22.90	22.96	22.35	0-1	1
16QAM	1	0	23.39	23.28	22.65	0-1	1
	1	2	23.26	23.24	22.66		1
	1	5	23.30	23.23	22.62		1
	3	0	23.23	23.36	22.80		1
	3	2	23.28	23.34	22.82		1
	3	3	23.28	23.35	22.78		1
	6	0	21.97	22.16	21.66	0-2	2

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 32 of 93	

9.4.3

LTE Band 4 (AWS)

Table 9-13
LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth

LTE Band 4 (AWS) 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20175 (1732.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.38	0	0
	1	50	23.28		0
	1	99	23.26		0
	50	0	22.02	0-1	1
	50	25	22.08		1
	50	50	22.00		1
	100	0	22.07		1
16QAM	1	0	22.62	0-1	1
	1	50	22.60		1
	1	99	22.75		1
	50	0	21.24	0-2	2
	50	25	21.20		2
	50	50	21.12		2
	100	0	21.24		2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-14
LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth

LTE Band 4 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.61	23.52	23.51	0	0
	1	36	23.57	23.43	23.48		0
	1	74	23.53	23.36	23.53		0
	36	0	22.14	22.05	22.13	0-1	1
	36	18	22.12	22.00	22.07		1
	36	37	22.11	21.97	22.07		1
	75	0	22.12	22.00	22.09		1
16QAM	1	0	22.58	22.49	22.65	0-1	1
	1	36	22.65	22.52	22.60		1
	1	74	22.56	22.48	22.61		1
	36	0	21.44	21.33	21.30	0-2	2
	36	18	21.36	21.26	21.29		2
	36	37	21.34	21.21	21.29		2
	75	0	21.32	21.23	21.29		2



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 33 of 93	

Table 9-15
LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth

LTE Band 4 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.62	23.51	23.56	0	0
	1	25	23.57	23.45	23.55		0
	1	49	23.50	23.39	23.58		0
	25	0	22.22	22.03	22.11	0-1	1
	25	12	22.18	21.96	22.12		1
	25	25	22.16	21.93	22.14		1
	50	0	22.17	21.96	22.12		1
16QAM	1	0	22.84	22.48	22.46	0-1	1
	1	25	22.60	22.58	22.53		1
	1	49	22.63	22.61	22.57		1
	25	0	21.53	21.29	21.32	0-2	2
	25	12	21.44	21.21	21.34		2
	25	25	21.40	21.23	21.36		2
	50	0	21.44	21.18	21.39		2

Table 9-16
LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth

LTE Band 4 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.67	23.42	23.67	0	0
	1	12	23.63	23.32	23.66		0
	1	24	23.66	23.35	23.72		0
	12	0	22.30	22.10	22.25	0-1	1
	12	6	22.30	22.08	22.27		1
	12	13	22.27	22.06	22.28		1
	25	0	22.28	22.09	22.29		1
16QAM	1	0	22.81	22.56	22.83	0-1	1
	1	12	22.73	22.58	22.85		1
	1	24	22.54	22.51	22.90		1
	12	0	21.55	21.26	21.46	0-2	2
	12	6	21.50	21.34	21.43		2
	12	13	21.42	21.31	21.44		2
	25	0	21.55	21.33	21.49		2



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 34 of 93	

Table 9-17
LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth

LTE Band 4 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.67	23.54	23.68	0	0
	1	7	23.68	23.51	23.73		0
	1	14	23.68	23.50	23.71		0
	8	0	22.27	22.07	22.24	0-1	1
	8	4	22.29	22.05	22.25		1
	8	7	22.26	22.06	22.29		1
	15	0	22.30	22.08	22.28		1
16QAM	1	0	22.72	22.60	22.65	0-1	1
	1	7	22.79	22.53	22.67		1
	1	14	22.73	22.67	22.58		1
	8	0	21.45	21.24	21.53	0-2	2
	8	4	21.49	21.24	21.63		2
	8	7	21.48	21.23	21.63		2
	15	0	21.52	21.33	21.46		2

Table 9-18
LTE Band 4 (AWS) Conducted Powers - 1.4 MHz Bandwidth

LTE Band 4 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.83	23.61	23.84	0	0
	1	2	23.77	23.56	23.81		0
	1	5	23.84	23.59	23.82		0
	3	0	23.65	23.42	23.63		0
	3	2	23.66	23.38	23.58		0
	3	3	23.67	23.39	23.59		0
	6	0	22.38	22.10	22.31	0-1	1
16QAM	1	0	22.70	22.20	22.60	0-1	1
	1	2	22.84	22.38	22.55		1
	1	5	22.75	22.25	22.52		1
	3	0	22.79	22.48	22.75		1
	3	2	22.73	22.51	22.74		1
	3	3	22.69	22.46	22.70		1
	6	0	21.54	21.44	21.59	0-2	2



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 35 of 93	

Table 9-19
LTE Band 4 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 4 (AWS) 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20175 (1732.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	21.50	0	0
	1	50	21.45		0
	1	99	21.31		0
	50	0	20.07	0-1	1
	50	25	20.08		1
	50	50	20.01		1
	100	0	20.07		1
16QAM	1	0	20.80	0-1	1
	1	50	20.68		1
	1	99	20.89		1
	50	0	19.21	0-2	2
	50	25	19.21		2
	50	50	19.16		2
	100	0	19.21		2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-20
LTE Band 4 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 4 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.61	21.52	21.50	0	0
	1	36	21.60	21.40	21.47		0
	1	74	21.55	21.38	21.46		0
	36	0	20.23	20.14	20.17	0-1	1
	36	18	20.23	20.10	20.18		1
	36	37	20.20	20.09	20.18		1
	75	0	20.18	20.11	20.16		1
16QAM	1	0	20.54	20.46	20.70	0-1	1
	1	36	20.57	20.50	20.69		1
	1	74	20.56	20.53	20.68		1
	36	0	19.52	19.31	19.33	0-2	2
	36	18	19.93	19.26	19.31		2
	36	37	19.52	19.29	19.32		2
	75	0	19.46	19.28	19.29		2



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 36 of 93	

Table 9-21
LTE Band 4 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 4 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.69	21.49	21.55	0	0
	1	25	21.67	21.44	21.45		0
	1	49	21.62	21.38	21.56		0
	25	0	20.28	20.15	20.21	0-1	1
	25	12	20.26	20.10	20.24		1
	25	25	20.25	20.09	20.27		1
	50	0	20.28	20.07	20.24		1
16QAM	1	0	20.72	20.58	20.64	0-1	1
	1	25	20.73	20.54	20.66		1
	1	49	20.63	20.57	20.69		1
	25	0	19.44	19.24	19.47	0-2	2
	25	12	19.41	19.21	19.42		2
	25	25	19.46	19.22	19.43		2
	50	0	19.40	19.30	19.44		2

Table 9-22
LTE Band 4 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 4 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.56	21.31	21.60	0	0
	1	12	21.50	21.26	21.51		0
	1	24	21.52	21.26	21.64		0
	12	0	20.24	20.09	20.24	0-1	1
	12	6	20.24	20.05	20.22		1
	12	13	20.25	20.06	20.23		1
	25	0	20.26	20.05	20.23		1
16QAM	1	0	20.67	20.40	20.69	0-1	1
	1	12	20.60	20.33	20.66		1
	1	24	20.52	20.38	20.60		1
	12	0	19.45	19.19	19.24	0-2	2
	12	6	19.46	19.24	19.30		2
	12	13	19.42	19.25	19.33		2
	25	0	19.44	19.19	19.34		2





FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 37 of 93	

Table 9-23
LTE Band 4 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth

LTE Band 4 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.62	21.37	21.41	0	0
	1	7	21.58	21.34	21.43		0
	1	14	21.57	21.37	21.42		0
	8	0	20.28	20.05	20.21	0-1	1
	8	4	20.24	20.06	20.18		1
	8	7	20.27	20.04	20.19		1
	15	0	20.26	20.02	20.20	1	
16QAM	1	0	20.79	20.36	20.64	0-1	1
	1	7	20.82	20.40	20.61		1
	1	14	20.78	20.39	20.93		1
	8	0	19.56	19.13	19.26	0-2	2
	8	4	19.51	19.11	19.28		2
	8	7	19.42	19.12	19.27		2
	15	0	19.48	19.09	19.40	2	

Table 9-24
LTE Band 4 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth

LTE Band 4 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.67	21.26	21.58	0	0
	1	2	21.67	21.25	21.55		0
	1	5	21.68	21.25	21.57		0
	3	0	21.60	21.29	21.46		0
	3	2	21.59	21.26	21.46		0
	3	3	21.60	21.28	21.45		0
	6	0	20.34	20.04	20.22	0-1	1
16QAM	1	0	20.76	20.73	20.72	0-1	1
	1	2	20.75	20.76	20.74		1
	1	5	20.82	20.65	20.77		1
	3	0	20.80	20.56	20.67		1
	3	2	20.84	20.59	20.72		1
	3	3	20.81	20.62	20.76		1
	6	0	19.43	19.20	19.36	0-2	2

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 38 of 93	

9.4.4

LTE Band 2 (PCS)

Table 9-25
LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth

LTE Band 2 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.43	23.14	23.40	0	0
	1	50	23.49	23.12	23.45		0
	1	99	23.47	23.18	23.41		0
	50	0	22.14	21.73	22.07	0-1	1
	50	25	22.17	21.76	22.12		1
	50	50	22.12	21.74	22.10		1
16QAM	100	0	22.16	21.67	22.12	0-1	1
	1	0	22.73	22.40	22.79		1
	1	50	22.57	22.45	22.64		1
	1	99	22.54	22.37	22.82	0-2	1
	50	0	21.39	20.91	21.31		2
	50	25	21.41	20.84	21.33		2
	50	50	21.31	20.95	21.30	2	
	100	0	21.35	20.94	21.23	2	

Table 9-26
LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth

LTE Band 2 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.20	23.20	23.47	0	0
	1	36	23.14	23.14	23.46		0
	1	74	23.13	23.12	23.39		0
	36	0	21.81	21.79	22.06	0-1	1
	36	18	21.78	21.77	22.03		1
	36	37	21.77	21.75	22.00		1
16QAM	75	0	21.77	21.78	22.01	0-1	1
	1	0	22.34	22.23	22.74		1
	1	36	22.18	22.20	22.72		1
	1	74	22.08	22.19	22.66	0-2	1
	36	0	21.03	21.01	21.57		2
	36	18	21.02	20.99	21.48		2
	36	37	21.00	20.98	21.45	2	
	75	0	20.98	20.99	21.46	2	



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 39 of 93

Table 9-27
LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth

LTE Band 2 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.43	23.18	23.44	0	0
	1	25	23.38	23.11	23.37		0
	1	49	23.33	23.13	23.35		0
	25	0	21.95	21.77	22.05	0-1	1
	25	12	21.92	21.76	22.04		1
	25	25	21.89	21.78	22.00		1
		50	0	21.91	21.77	22.03	1
16QAM	1	0	22.31	22.12	22.60	0-1	1
	1	25	22.27	22.08	22.56		1
	1	49	22.22	22.09	22.48		1
	25	0	21.22	20.92	21.36	0-2	2
	25	12	21.17	20.94	21.33		2
	25	25	21.18	20.95	21.30		2
		50	0	21.12	20.99	21.31	2

Table 9-28
LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth

LTE Band 2 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.41	23.15	23.68	0	0
	1	12	23.41	23.08	23.57		0
	1	24	23.43	23.14	23.65		0
	12	0	22.07	21.94	22.33	0-1	1
	12	6	22.07	21.95	22.34		1
	12	13	22.04	21.94	22.30		1
		25	0	22.05	21.93	22.31	1
16QAM	1	0	22.66	22.49	22.89	0-1	1
	1	12	22.35	22.36	22.79		1
	1	24	22.66	22.35	22.73		1
	12	0	21.11	21.15	21.55	0-2	2
	12	6	21.12	21.13	21.55		2
	12	13	21.13	21.14	21.57		2
		25	0	21.23	21.15	21.53	2





FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 40 of 93

Table 9-29
LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth

LTE Band 2 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.57	23.01	23.69	0	0
	1	7	23.57	23.05	23.68		0
	1	14	23.54	23.05	23.67		0
	8	0	22.25	21.65	22.31	0-1	1
	8	4	22.08	21.63	22.29		1
	8	7	22.10	21.60	22.29		1
	15	0	22.09	21.65	22.32		1
16QAM	1	0	22.45	22.14	22.67	0-1	1
	1	7	22.53	22.15	22.78		1
	1	14	22.50	22.17	22.69		1
	8	0	21.41	20.84	21.52	0-2	2
	8	4	21.42	20.81	21.56		2
	8	7	21.42	20.85	21.51		2
	15	0	21.33	20.85	21.57		2

Table 9-30
LTE Band 2 (PCS) Conducted Powers -1.4 MHz Bandwidth

LTE Band 2 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.41	23.15	23.69	0	0
	1	2	23.36	23.11	23.65		0
	1	5	23.38	23.14	23.57		0
	3	0	23.32	22.93	23.59		0
	3	2	23.33	22.98	23.58		0
	3	3	23.31	22.93	23.55		0
	6	0	22.02	21.66	22.30	0-1	1
16QAM	1	0	22.47	22.08	22.65	0-1	1
	1	2	22.35	22.04	22.40		1
	1	5	22.38	22.00	22.52		1
	3	0	22.45	22.11	22.65		1
	3	2	22.46	22.12	22.67		1
	3	3	22.47	22.09	22.62		1
	6	0	21.32	20.86	21.40	0-2	2

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 41 of 93	

**Table 9-31
LTE Band 2 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 2 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.42	21.08	21.50	0	0
	1	50	21.45	21.08	21.52		0
	1	99	21.31	21.15	21.51		0
	50	0	20.10	19.64	20.14	0-1	1
	50	25	20.02	19.68	20.11		1
	50	50	20.01	19.73	20.13		1
	100	0	20.05	19.62	20.11		1
16QAM	1	0	20.57	20.32	20.66	0-1	1
	1	50	20.37	20.20	20.74		1
	1	99	20.65	20.39	20.71		1
	50	0	19.25	18.97	19.40	0-2	2
	50	25	19.31	18.87	19.37		2
	50	50	19.30	18.97	19.35		2
	100	0	19.35	18.96	19.44		2

**Table 9-32
LTE Band 2 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth**

LTE Band 2 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.56	21.14	21.67	0	0
	1	36	21.51	21.09	21.67		0
	1	74	21.48	21.16	21.64		0
	36	0	20.17	19.76	20.33	0-1	1
	36	18	20.16	19.75	20.28		1
	36	37	20.14	19.76	20.27		1
	75	0	20.13	19.78	20.26		1
16QAM	1	0	20.70	20.26	20.79	0-1	1
	1	36	20.77	20.24	20.81		1
	1	74	20.72	20.32	20.80		1
	36	0	19.40	19.11	19.55	0-2	2
	36	18	19.40	19.07	19.52		2
	36	37	19.39	19.10	19.52		2
	75	0	19.37	19.07	19.53		2



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 42 of 93

Table 9-33
LTE Band 2 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 2 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.57	21.07	21.64	0	0
	1	25	21.54	21.06	21.61		0
	1	49	21.51	21.09	21.62		0
	25	0	20.18	19.73	20.37	0-1	1
	25	12	20.15	19.75	20.34		1
	25	25	20.17	19.76	20.33		1
	50	0	20.16	19.76	20.35		1
16QAM	1	0	20.48	20.07	20.93	0-1	1
	1	25	20.48	20.06	20.94		1
	1	49	20.47	20.02	20.85		1
	25	0	19.46	19.00	19.63	0-2	2
	25	12	19.47	18.98	19.61		2
	25	25	19.50	19.02	19.60		2
	50	0	19.46	19.03	19.59		2

Table 9-34
LTE Band 2 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 2 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.45	21.05	21.70	0	0
	1	12	21.43	21.12	21.67		0
	1	24	21.44	21.11	21.65		0
	12	0	20.17	19.73	20.42	0-1	1
	12	6	20.18	19.71	20.41		1
	12	13	20.19	19.74	20.45		1
	25	0	20.15	19.73	20.42		1
16QAM	1	0	20.51	20.13	21.00	0-1	1
	1	12	20.65	20.25	20.94		1
	1	24	20.55	20.23	20.98		1
	12	0	19.37	19.08	19.57	0-2	2
	12	6	19.34	19.04	19.49		2
	12	13	19.42	19.03	19.57		2
	25	0	19.44	19.00	19.58		2





FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 43 of 93

Table 9-35
LTE Band 2 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth

LTE Band 2 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.57	21.02	21.68	0	0
	1	7	21.55	21.03	21.65		0
	1	14	21.53	21.05	21.67		0
	8	0	20.13	19.72	20.36	0-1	1
	8	4	20.11	19.73	20.38		1
	8	7	20.13	19.73	20.41		1
	15	0	20.15	19.74	20.42		1
16QAM	1	0	20.64	20.14	20.92	0-1	1
	1	7	20.60	20.10	20.82		1
	1	14	20.63	20.18	20.85		1
	8	0	19.36	19.06	19.51	0-2	2
	8	4	19.37	19.01	19.56		2
	8	7	19.36	19.07	19.55		2
	15	0	19.39	18.97	19.62		2

Table 9-36
LTE Band 2 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth

LTE Band 2 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.60	21.17	21.69	0	0
	1	2	21.58	21.14	21.65		0
	1	5	21.62	21.18	21.67		0
	3	0	21.52	21.03	21.64		0
	3	2	21.53	21.05	21.65		0
	3	3	21.55	21.02	21.63		0
	6	0	20.23	19.75	20.40	0-1	1
16QAM	1	0	20.47	19.95	20.81	0-1	1
	1	2	20.67	19.94	20.70		1
	1	5	20.64	19.94	20.89		1
	3	0	20.68	20.11	20.81		1
	3	2	20.60	20.08	20.86		1
	3	3	20.59	20.08	20.83		1
	6	0	19.46	19.12	19.72	0-2	2

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 44 of 93	

9.4.5

LTE Band 7

Table 9-37
LTE Band 7 Conducted Powers - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.46	22.50	22.88	0	0
	1	50	22.50	22.74	22.89		0
	1	99	22.56	22.72	22.95		0
	50	0	21.49	21.62	21.72	0-1	1
	50	25	21.46	21.73	21.71		1
	50	50	21.47	21.68	21.76		1
	100	0	21.47	21.66	21.68		1
16QAM	1	0	21.69	21.74	21.76	0-1	1
	1	50	21.59	21.68	21.85		1
	1	99	21.70	21.76	21.84		1
	50	0	20.35	20.57	20.67	0-2	2
	50	25	20.37	20.54	20.56		2
	50	50	20.41	20.61	20.67		2
	100	0	20.42	20.57	20.67		2

Table 9-38
LTE Band 7 Conducted Powers - 15 MHz Bandwidth

LTE Band 7 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.31	22.39	22.61	0	0
	1	36	22.27	22.41	22.57		0
	1	74	22.29	22.43	22.56		0
	36	0	21.22	21.44	21.69	0-1	1
	36	18	21.17	21.34	21.62		1
	36	37	21.17	21.36	21.60		1
	75	0	21.15	21.32	21.64		1
16QAM	1	0	21.10	21.27	21.59	0-1	1
	1	36	21.07	21.20	21.72		1
	1	74	21.08	21.17	21.61		1
	36	0	20.14	20.38	20.61	0-2	2
	36	18	20.13	20.30	20.53		2
	36	37	20.15	20.31	20.57		2
	75	0	20.15	20.28	20.57		2



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 45 of 93	

Table 9-39
LTE Band 7 Conducted Powers - 10 MHz Bandwidth

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.12	22.43	22.74	0	0
	1	25	22.15	22.42	22.70		0
	1	49	22.17	22.44	22.72		0
	25	0	21.07	21.31	21.58	0-1	1
	25	12	21.08	21.33	21.59		1
	25	25	21.07	21.34	21.56		1
16QAM	50	0	21.04	21.33	21.57	0-1	1
	1	0	21.09	21.17	21.52		1
	1	25	21.06	21.16	21.47		1
	1	49	20.98	21.15	21.54	0-2	1
	25	0	20.07	20.32	20.52		2
	25	12	20.02	20.28	20.47		2
	25	25	20.05	20.32	20.48		2
50	0	20.03	20.27	20.51	2		

Table 9-40
LTE Band 7 Conducted Powers - 5 MHz Bandwidth

LTE Band 7 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.20	22.42	22.62	0	0
	1	12	22.19	22.44	22.60		0
	1	24	22.20	22.48	22.63		0
	12	0	21.09	21.34	21.51	0-1	1
	12	6	21.07	21.34	21.50		1
	12	13	21.08	21.36	21.48		1
16QAM	25	0	21.04	21.33	21.49	0-1	1
	1	0	21.05	21.58	21.37		1
	1	12	21.02	21.47	21.41		1
	1	24	21.04	21.53	21.39	0-2	1
	12	0	20.05	20.25	20.47		2
	12	6	20.04	20.24	20.48		2
	12	13	20.04	20.26	20.49		2
25	0	20.03	20.23	20.47	2		



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 46 of 93	

Table 9-41
LTE Band 7 Reduced Conducted Powers - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.30	21.63	21.74	0	0
	1	50	21.40	21.70	21.70		0
	1	99	21.49	21.72	21.77		0
	50	0	20.22	20.45	20.50	0-1	1
	50	25	20.24	20.48	20.46		1
	50	50	20.23	20.49	20.64		1
	100	0	20.24	20.46	20.48		1
16QAM	1	0	20.32	20.55	20.40	0-1	1
	1	50	20.44	20.56	20.70		1
	1	99	20.25	20.65	20.63		1
	50	0	19.24	19.40	19.41	0-2	2
	50	25	19.21	19.32	19.49		2
	50	50	19.29	19.46	19.53		2
	100	0	19.20	19.51	19.55		2

Table 9-42
LTE Band 7 Reduced Conducted Powers - 15 MHz Bandwidth

LTE Band 7 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.45	21.63	21.58	0	0
	1	36	21.44	21.66	21.55		0
	1	74	21.42	21.67	21.54		0
	36	0	20.21	20.48	20.34	0-1	1
	36	18	20.19	20.46	20.31		1
	36	37	20.18	20.49	20.33		1
	75	0	20.22	20.45	20.34		1
16QAM	1	0	20.16	20.46	20.22	0-1	1
	1	36	20.26	20.32	20.21		1
	1	74	20.18	20.48	20.17		1
	36	0	19.30	19.55	19.44	0-2	2
	36	18	19.33	19.53	19.41		2
	36	37	19.38	19.59	19.43		2
	75	0	19.35	19.60	19.42		2





FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 47 of 93	

Table 9-43
LTE Band 7 Reduced Conducted Powers - 10 MHz Bandwidth

LTE Band 7 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	21.38	21.68	21.44	0	0
	1	25	21.35	21.70	21.42		0
	1	49	21.35	21.74	21.43		0
	25	0	20.22	20.46	20.20	0-1	1
	25	12	20.21	20.47	20.21		1
	25	25	20.25	20.49	20.23		1
16QAM	50	0	20.19	20.48	20.24	0-1	1
	1	0	20.24	20.50	20.32		1
	1	25	20.25	20.42	20.31		1
	1	49	20.23	20.52	20.14	0-2	1
	25	0	19.35	19.53	19.30		2
	25	12	19.32	19.55	19.29		2
	25	25	19.33	19.56	19.34		2
50	0	19.32	19.52	19.32	2		

Table 9-44
LTE Band 7 Reduced Conducted Powers - 5 MHz Bandwidth

LTE Band 7 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	21.36	21.65	21.44	0	0	
	1	12	21.37	21.62	21.42		0	
	1	24	21.39	21.65	21.46		0	
	16QAM	12	0	20.17	20.45	20.22	0-1	1
		12	6	20.16	20.50	20.22		1
		12	13	20.15	20.49	20.23		1
		25	0	20.15	20.46	20.23		1
16QAM	1	0	20.28	20.53	20.02	0-1	1	
	1	12	20.24	20.37	20.24		1	
	1	24	20.15	20.21	20.12		1	
	16QAM	12	0	19.20	19.56	19.28	0-2	2
		12	6	19.22	19.55	19.28		2
		12	13	19.19	19.50	19.31		2
		25	0	19.21	19.53	19.27		2

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 48 of 93

9.4.6 LTE Carrier Aggregation Conducted Powers

Table 9-45
Maximum LTE Carrier Aggregation Conducted Powers

Combination	PCC									SCC				Power	
	PCC Band	PCC BW [MHz]	PCC (UL) Channel	PCC (UL) Freq. [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2A-2A	LTE B2	5	19175	1907.5	QPSK	1	0	1175	1987.5	LTE B2	20	700	1940	23.69	23.68
CA_2A-4A	LTE B2	3	19185	1908.5	QPSK	1	0	1185	1988.5	LTE B4	20	2175	2132.5	23.71	23.69
CA_2A-5A	LTE B2	5	19175	1907.5	QPSK	1	0	1175	1987.5	LTE B5	10	2525	881.5	23.70	23.68
CA_2A-13A	LTE B2	5	19175	1907.5	QPSK	1	0	1175	1987.5	LTE B13	10	5230	751	23.73	23.68
CA_2C	LTE B2	5	19175	1907.5	QPSK	1	0	1175	1987.5	LTE B2	20	1058	1975.8	23.72	23.68
CA_4A-4A	LTE B4	5	20375	1752.5	QPSK	1	24	2375	2152.5	LTE B4	20	2050	2120	23.70	23.72
CA_2A-4A	LTE B4	5	20375	1752.5	QPSK	1	24	2375	2152.5	LTE B2	20	900	1960	23.73	23.72
CA_4A-5A (1)	LTE B4	5	20375	1752.5	QPSK	1	24	2375	2152.5	LTE B5	10	2525	881.5	23.70	23.72
CA_4A-13A	LTE B4	5	20375	1752.5	QPSK	1	24	2375	2152.5	LTE B13	10	5230	751	23.69	23.72
CA_2A-5A	LTE B5	5	20425	826.5	QPSK	1	24	2425	871.5	LTE B2	20	900	1960	24.45	24.36
CA_4A-5A (1)	LTE B5	5	20425	826.5	QPSK	1	24	2425	871.5	LTE B4	20	2175	2132.5	24.42	24.36
CA_2A-13A	LTE B13	10	23230	782	QPSK	1	0	5230	751	LTE B2	20	900	1960	23.75	23.74
CA_4A-13A	LTE B13	10	23230	782	QPSK	1	0	5230	751	LTE B4	20	2175	2132.5	23.76	23.74

Table 9-46
Reduced LTE Carrier Aggregation Conducted Powers

Combination	PCC									SCC				Power	
	PCC Band	PCC BW [MHz]	PCC (UL) Channel	PCC (UL) Freq. [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2A-2A	LTE B2	5	19175	1907.5	QPSK	1	0	1175	1987.5	LTE B2	20	700	1940	21.71	21.70
CA_2A-4A	LTE B2	5	19175	1907.5	QPSK	1	0	1175	1987.5	LTE B4	20	2175	2132.5	21.66	21.70
CA_2A-5A	LTE B2	5	19175	1907.5	QPSK	1	0	1175	1987.5	LTE B5	10	2525	881.5	21.65	21.70
CA_2A-13A	LTE B2	5	19175	1907.5	QPSK	1	0	1175	1987.5	LTE B13	10	5230	751	21.67	21.70
CA_2C	LTE B2	5	19175	1907.5	QPSK	1	0	1175	1987.5	LTE B2	20	1058	1975.8	21.73	21.70
CA_4A-4A	LTE B4	10	20000	1715	QPSK	1	0	2000	2115	LTE B4	20	2300	2145	21.67	21.69
CA_2A-4A	LTE B4	10	20000	1715	QPSK	1	0	2000	2115	LTE B2	20	900	1960	21.64	21.69
CA_4A-5A (1)	LTE B4	10	20000	1715	QPSK	1	0	2000	2115	LTE B5	10	2525	881.5	21.68	21.69
CA_4A-13A	LTE B4	10	20000	1715	QPSK	1	0	2000	2115	LTE B13	10	5230	751	21.69	21.69

Notes:

- For every supported combination of downlink carrier aggregation, power measurements were performed with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.
- All control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- For downlink carrier aggregation combinations, PCC uplink channel was selected based on section C)3)b)ii) of KBD 941225 D05 V01r02. The downlink PCC channel was paired with the selected PCC uplink channel according to normal configurations without carrier aggregation. For inter-band CA, the SCC downlink channels were selected near the middle of their transmission bands. For contiguous intra-band CA, the downlink channel spacing between the component carriers was set to multiple of 300 kHz less than the nominal channel spacing defined in section 5.4.1A of 3GPP TS 36.521. For non-contiguous intra-band CA, the downlink channel spacing between the component carriers was set to be larger than the nominal channel spacing and provided maximum separation between the component carriers. All selected downlink channels remained fully within the downlink transmission band of the respective component carrier.




Figure 9-4
Power Measurement Setup

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 49 of 93	



9.5 WLAN Conducted Powers

Table 9-47
2.4 GHz WLAN Maximum Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	15.10	13.51	13.64
2417	2	N/A	15.33	15.37
2437	6	15.58	15.45	15.36
2457	10	N/A	15.37	15.34
2462	11	15.25	12.65	12.71

Table 9-48
5 GHz WLAN Maximum Average RF Power

5GHz (20MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
		Average	Average	Average
5180	36	13.41	13.38	13.44
5200	40	15.42	15.34	15.48
5220	44	15.11	15.04	15.28
5240	48	15.17	15.11	15.13
5260	52	14.46	15.49	15.47
5280	56	14.50	15.33	15.46
5300	60	15.49	15.23	15.36
5320	64	13.47	13.13	13.39
5500	100	13.49	13.45	13.44
5600	120	14.63	14.68	14.62
5620	124	14.81	15.49	14.54
5720	144	14.71	15.35	15.41
5745	149	15.24	15.23	15.27
5785	157	15.09	15.13	15.36
5825	165	13.01	13.04	13.11

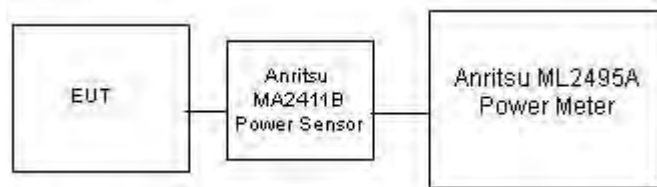
FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 50 of 93	

**Table 9-49
5 GHz WLAN Reduced Average RF Power**



5GHz (40MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11n	802.11ac
		Average	Average
5190	38	9.67	9.74
5230	46	11.49	11.56
5270	54	10.60	11.85
5310	62	8.66	8.72
5510	102	11.27	11.14
5590	118	11.00	11.94
5630	126	11.11	11.97
5710	142	10.71	11.99
5755	151	11.24	11.59
5795	159	11.13	11.09

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.



**Figure 9-5
Power Measurement Setup**



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 51 of 93	

10 SYSTEM VERIFICATION

10.1 Tissue Verification

**Table 10-1
Measured Tissue Properties - Head**



Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
3/30/2018	750H	21.0	740	0.900	42.685	0.893	41.994	0.78%	1.65%
			755	0.913	42.469	0.894	41.916	2.13%	1.32%
			770	0.926	42.250	0.895	41.838	3.46%	0.98%
			785	0.940	42.037	0.896	41.760	4.91%	0.66%
3/25/2018	835H	21.3	820	0.884	41.223	0.899	41.578	-1.67%	-0.85%
			835	0.899	41.025	0.900	41.500	-0.11%	-1.14%
			850	0.914	40.840	0.916	41.500	-0.22%	-1.59%
3/20/2018	1750H	21.3	1710	1.353	39.663	1.348	40.142	0.37%	-1.19%
			1750	1.396	39.468	1.371	40.079	1.82%	-1.52%
			1790	1.436	39.285	1.394	40.016	3.01%	-1.83%
4/2/2018	1900H	22.1	1850	1.345	39.370	1.400	40.000	-3.93%	-1.58%
			1880	1.377	39.254	1.400	40.000	-1.64%	-1.87%
			1910	1.409	39.118	1.400	40.000	0.64%	-2.20%
4/5/2018	1900H	22.3	1850	1.376	40.133	1.400	40.000	-1.71%	0.33%
			1880	1.407	40.025	1.400	40.000	0.50%	0.06%
			1910	1.440	39.896	1.400	40.000	2.86%	-0.26%
3/30/2018	2450H	22.4	2400	1.782	40.281	1.756	39.289	1.48%	2.52%
			2450	1.841	40.128	1.800	39.200	2.28%	2.37%
			2500	1.895	39.940	1.855	39.136	2.16%	2.05%
3/18/2018	2600H	23.5	2500	1.913	39.830	1.855	39.136	3.13%	1.77%
			2550	1.970	39.599	1.909	39.073	3.20%	1.35%
			2600	2.024	39.431	1.964	39.009	3.05%	1.08%
03/26/2018	5200H-5800H	22.3	5240	4.659	37.531	4.696	35.940	-0.79%	4.43%
			5260	4.680	37.538	4.717	35.917	-0.78%	4.51%
			5280	4.677	37.436	4.737	35.894	-1.27%	4.30%
			5300	4.706	37.487	4.758	35.871	-1.09%	4.51%
			5320	4.736	37.336	4.778	35.849	-0.88%	4.15%
			5500	4.886	37.146	4.963	35.643	-1.55%	4.22%
			5520	4.942	37.088	4.983	35.620	-0.82%	4.12%
			5600	5.020	36.954	5.065	35.529	-0.89%	4.01%
			5620	5.047	36.994	5.086	35.506	-0.77%	4.19%
			5640	5.086	36.922	5.106	35.483	-0.39%	4.06%
			5700	5.127	36.883	5.168	35.414	-0.79%	4.15%
			5745	5.192	36.779	5.214	35.363	-0.42%	4.00%
			5765	5.201	36.758	5.234	35.340	-0.63%	4.01%
			5785	5.217	36.796	5.255	35.317	-0.72%	4.19%
5800	5.243	36.662	5.270	35.300	-0.51%	3.86%			

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 52 of 93	

**Table 10-2
Measured Tissue Properties - Body**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
3/29/2018	750B	23.4	740	0.953	56.670	0.963	55.570	-1.04%	1.98%
			755	0.975	56.572	0.964	55.512	1.14%	1.91%
			770	0.987	56.399	0.965	55.453	2.28%	1.71%
			785	0.998	56.191	0.966	55.395	3.31%	1.44%
3/22/2018	835B	20.7	820	0.944	53.006	0.969	55.258	-2.58%	-4.08%
			835	0.958	52.853	0.970	55.200	-1.24%	-4.25%
			850	0.972	52.698	0.988	55.154	-1.62%	-4.45%
3/23/2018	1750B	21.4	1710	1.470	51.077	1.463	53.537	0.48%	-4.59%
			1750	1.514	50.923	1.488	53.432	1.75%	-4.70%
			1790	1.559	50.737	1.514	53.326	2.97%	-4.86%
3/26/2018	1750B	21.3	1710	1.479	51.319	1.463	53.537	1.09%	-4.14%
			1750	1.527	51.137	1.488	53.432	2.62%	-4.30%
			1790	1.571	50.987	1.514	53.326	3.76%	-4.39%
3/24/2018	1900B	22.5	1850	1.521	52.721	1.520	53.300	0.07%	-1.09%
			1880	1.557	52.639	1.520	53.300	2.43%	-1.24%
			1910	1.590	52.538	1.520	53.300	4.61%	-1.43%
3/26/2018	1900B	22.0	1850	1.520	53.122	1.520	53.300	0.00%	-0.33%
			1880	1.555	53.014	1.520	53.300	2.30%	-0.54%
			1910	1.590	52.935	1.520	53.300	4.61%	-0.68%
3/30/2018	1900B	22.3	1850	1.521	53.710	1.520	53.300	0.07%	0.77%
			1880	1.553	53.605	1.520	53.300	2.17%	0.57%
			1910	1.592	53.490	1.520	53.300	4.74%	0.36%
4/2/2018	1900B	22.1	1850	1.522	54.195	1.520	53.300	0.13%	1.68%
			1880	1.555	54.092	1.520	53.300	2.30%	1.49%
			1910	1.590	53.987	1.520	53.300	4.61%	1.29%
4/5/2018	1900B	21.7	1850	1.520	53.877	1.520	53.300	0.00%	1.08%
			1880	1.553	53.793	1.520	53.300	2.17%	0.92%
			1910	1.587	53.695	1.520	53.300	4.41%	0.74%
4/3/2018	2450B	21.6	2400	1.988	51.278	1.902	52.767	4.52%	-2.82%
			2450	2.043	51.130	1.950	52.700	4.77%	-2.98%
			2500	2.106	50.978	2.021	52.636	4.21%	-3.15%
			2550	2.165	50.835	2.092	52.573	3.49%	-3.31%
3/31/2018	2450B-2600B	21.7	2400	1.996	51.222	1.902	52.767	4.94%	-2.93%
			2450	2.047	51.075	1.950	52.700	4.97%	-3.08%
			2500	2.111	50.898	2.021	52.636	4.45%	-3.30%
			2550	2.170	50.797	2.092	52.573	3.73%	-3.38%
04/02/2018	5200B-5800B	21.8	5240	5.478	47.205	5.346	48.960	2.47%	-3.58%
			5260	5.499	47.203	5.369	48.933	2.42%	-3.54%
			5300	5.563	47.094	5.416	48.879	2.71%	-3.65%
			5600	5.955	46.600	5.766	48.471	3.28%	-3.86%
			5620	5.983	46.596	5.790	48.444	3.33%	-3.81%
			5745	6.153	46.367	5.936	48.275	3.66%	-3.95%
			5765	6.182	46.318	5.959	48.248	3.74%	-4.00%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 53 of 93	

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.


Table 10-3
System Verification Results – 1g

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
H	750	HEAD	03/30/2018	23.8	21.2	0.200	1161	7410	1.620	8.170	8.100	-0.86%
E	835	HEAD	03/25/2018	23.5	21.5	0.200	4d132	3213	1.980	9.360	9.900	5.77%
H	1750	HEAD	03/20/2018	22.8	21.8	0.100	1148	7410	3.540	36.400	35.400	-2.75%
G	1900	HEAD	04/02/2018	22.9	21.2	0.100	5d080	3332	3.660	39.300	36.600	-6.87%
G	1900	HEAD	04/05/2018	22.2	21.2	0.100	5d080	3332	3.860	39.300	38.600	-1.78%
G	2450	HEAD	03/30/2018	21.9	21.5	0.100	797	3332	5.000	52.700	50.000	-5.12%
G	2600	HEAD	03/18/2018	21.7	21.5	0.100	1126	3332	5.550	56.400	55.500	-1.60%
H	5250	HEAD	03/26/2018	21.5	20.4	0.050	1120	3589	3.900	81.300	78.000	-4.06%
H	5600	HEAD	03/26/2018	21.5	20.4	0.050	1120	3589	4.270	84.700	85.400	0.83%
H	5750	HEAD	03/26/2018	21.5	20.4	0.050	1120	3589	3.900	81.000	78.000	-3.70%
I	750	BODY	03/29/2018	22.8	23.1	0.200	1161	3287	1.740	8.430	8.700	3.20%
E	835	BODY	03/22/2018	21.3	20.7	0.200	4d132	3213	1.920	9.710	9.600	-1.13%
K	1750	BODY	03/23/2018	23.2	21.4	0.100	1148	7406	3.970	37.000	39.700	7.30%
J	1900	BODY	03/24/2018	22.0	22.5	0.100	5d148	3914	4.250	39.600	42.500	7.32%
J	1900	BODY	03/26/2018	22.1	22.0	0.100	5d148	3914	4.180	39.600	41.800	5.56%
J	1900	BODY	03/30/2018	22.9	22.0	0.100	5d148	3914	4.250	39.600	42.500	7.32%
K	2450	BODY	03/31/2018	21.5	21.7	0.100	797	7406	4.950	51.100	49.500	-3.13%
K	2450	BODY	04/03/2018	22.4	21.6	0.100	797	3319	5.050	51.100	50.500	-1.17%
K	2600	BODY	03/31/2018	21.5	21.7	0.100	1126	7406	5.250	54.300	52.500	-3.31%
D	5250	BODY	04/02/2018	22.5	20.6	0.050	1237	7308	3.600	76.900	72.000	-6.37%
D	5600	BODY	04/02/2018	22.5	20.6	0.050	1237	7308	3.800	78.500	76.000	-3.18%
D	5750	BODY	04/02/2018	22.5	20.6	0.050	1237	7308	3.600	77.100	72.000	-6.61%

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 54 of 93	

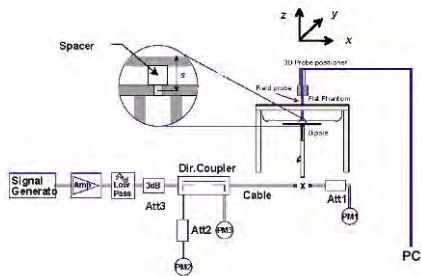**Table 10-4
System Verification Results – 10g**



System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{10g} (W/kg)	1 W Target SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation _{10g} (%)
K	1750	BODY	03/26/2018	22.0	21.3	0.100	1150	7406	2.070	19.500	20.700	6.15%
J	1900	BODY	03/24/2018	22.0	22.5	0.100	5d148	3914	2.180	20.900	21.800	4.31%
J	1900	BODY	04/02/2018	21.0	21.0	0.100	5d148	3914	2.190	20.900	21.900	4.78%
J	1900	BODY	04/05/2018	21.9	21.7	0.100	5d148	3914	2.160	20.900	21.600	3.35%
K	2450	BODY	03/31/2018	21.5	21.7	0.100	797	7406	2.280	24.200	22.800	-5.79%
K	2600	BODY	03/31/2018	21.5	21.7	0.100	1126	7406	2.330	24.400	23.300	-4.51%
D	5250	BODY	04/02/2018	22.5	20.6	0.050	1237	7308	1.010	21.500	20.200	-6.05%
D	5600	BODY	04/02/2018	22.5	20.6	0.050	1237	7308	1.060	22.100	21.200	-4.07%



**Figure 10-1
System Verification Setup Diagram**



**Figure 10-2
System Verification Setup Photo**

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 55 of 93	

11 SAR DATA SUMMARY



11.1 Standalone Head SAR Data

**Table 11-1
Cell. CDMA Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	Cell. CDMA	RC3 / SO55	25.5	24.26	-0.17	Right	Cheek	28349	1:1	0.257	1.330	0.342	A1
836.52	384	Cell. CDMA	RC3 / SO55	25.5	24.26	-0.01	Right	Tilt	28349	1:1	0.160	1.330	0.213	
836.52	384	Cell. CDMA	RC3 / SO55	25.5	24.26	0.08	Left	Cheek	28349	1:1	0.257	1.330	0.342	
836.52	384	Cell. CDMA	RC3 / SO55	25.5	24.26	0.04	Left	Tilt	28349	1:1	0.154	1.330	0.205	
836.52	384	Cell. CDMA	EVDO Rev. A	25.0	23.76	0.08	Right	Cheek	28349	1:1	0.225	1.330	0.299	
836.52	384	Cell. CDMA	EVDO Rev. A	25.0	23.76	0.05	Right	Tilt	28349	1:1	0.142	1.330	0.189	
836.52	384	Cell. CDMA	EVDO Rev. A	25.0	23.76	-0.04	Left	Cheek	28349	1:1	0.224	1.330	0.298	
836.52	384	Cell. CDMA	EVDO Rev. A	25.0	23.76	0.03	Left	Tilt	28349	1:1	0.134	1.330	0.178	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-2
PCS CDMA Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	600	PCS CDMA	RC3 / SO55	21.5	20.41	-0.02	Right	Cheek	13655	1:1	0.307	1.285	0.394	
1880.00	600	PCS CDMA	RC3 / SO55	21.5	20.41	0.08	Right	Tilt	13655	1:1	0.176	1.285	0.226	
1851.25	25	PCS CDMA	RC3 / SO55	21.5	20.48	-0.16	Left	Cheek	13655	1:1	0.535	1.265	0.677	
1880.00	600	PCS CDMA	RC3 / SO55	21.5	20.41	0.02	Left	Cheek	13655	1:1	0.525	1.285	0.675	
1908.75	1175	PCS CDMA	RC3 / SO55	21.5	20.54	0.10	Left	Cheek	13655	1:1	0.593	1.247	0.739	
1880.00	600	PCS CDMA	RC3 / SO55	21.5	20.41	-0.06	Left	Tilt	13655	1:1	0.271	1.285	0.348	
1880.00	600	PCS CDMA	EVDO Rev. A	21.5	20.39	-0.01	Right	Cheek	13655	1:1	0.287	1.291	0.371	
1880.00	600	PCS CDMA	EVDO Rev. A	21.5	20.39	0.07	Right	Tilt	13655	1:1	0.162	1.291	0.209	
1851.25	25	PCS CDMA	EVDO Rev. A	21.5	20.48	0.03	Left	Cheek	13655	1:1	0.559	1.265	0.707	
1880.00	600	PCS CDMA	EVDO Rev. A	21.5	20.39	0.04	Left	Cheek	13655	1:1	0.596	1.291	0.769	
1908.75	1175	PCS CDMA	EVDO Rev. A	21.5	20.52	-0.02	Left	Cheek	13655	1:1	0.636	1.253	0.797	A2
1880.00	600	PCS CDMA	EVDO Rev. A	21.5	20.39	0.07	Left	Tilt	13655	1:1	0.248	1.291	0.320	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 56 of 93	

**Table 11-3
GSM 850 Head SAR**



MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.0	31.92	-0.02	Right	Cheek	28349	1:8.3	0.176	1.282	0.226	
836.60	190	GSM 850	GSM	33.0	31.92	0.03	Right	Tilt	28349	1:8.3	0.110	1.282	0.141	
836.60	190	GSM 850	GSM	33.0	31.92	0.08	Left	Cheek	28349	1:8.3	0.177	1.282	0.227	A3
836.60	190	GSM 850	GSM	33.0	31.92	0.06	Left	Tilt	28349	1:8.3	0.106	1.282	0.136	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-4
GSM 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	29.0	27.84	-0.03	Right	Cheek	28349	1:8.3	0.276	1.306	0.360	
1880.00	661	GSM 1900	GSM	29.0	27.84	-0.06	Right	Tilt	28349	1:8.3	0.147	1.306	0.192	
1880.00	661	GSM 1900	GSM	29.0	27.84	0.03	Left	Cheek	28349	1:8.3	0.458	1.306	0.598	A4
1880.00	661	GSM 1900	GSM	29.0	27.84	-0.01	Left	Tilt	28349	1:8.3	0.217	1.306	0.283	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-5
UMTS 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	24.0	22.88	0.01	Right	Cheek	13291	1:1	0.205	1.294	0.265	A5
836.60	4183	UMTS 850	RMC	24.0	22.88	0.05	Right	Tilt	13291	1:1	0.124	1.294	0.160	
836.60	4183	UMTS 850	RMC	24.0	22.88	0.08	Left	Cheek	13291	1:1	0.200	1.294	0.259	
836.60	4183	UMTS 850	RMC	24.0	22.88	0.00	Left	Tilt	13291	1:1	0.120	1.294	0.155	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 57 of 93

**Table 11-6
UMTS 1900 Head SAR**



MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	21.5	20.87	0.11	Right	Cheek	13655	1:1	0.326	1.156	0.377	
1880.00	9400	UMTS 1900	RMC	21.5	20.87	-0.03	Right	Tilt	13655	1:1	0.197	1.156	0.228	
1852.40	9262	UMTS 1900	RMC	21.5	21.12	-0.02	Left	Cheek	13655	1:1	0.509	1.091	0.555	
1880.00	9400	UMTS 1900	RMC	21.5	20.87	0.02	Left	Cheek	13655	1:1	0.603	1.156	0.697	A6
1907.60	9538	UMTS 1900	RMC	21.5	21.19	-0.02	Left	Cheek	13655	1:1	0.576	1.074	0.619	
1880.00	9400	UMTS 1900	RMC	21.5	20.87	-0.01	Left	Tilt	13655	1:1	0.288	1.156	0.333	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

**Table 11-7
LTE Band 13 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	24.5	23.74	-0.06	0	Right	Cheek	QPSK	1	0	28349	1:1	0.315	1.191	0.375	A7
782.00	23230	Mid	LTE Band 13	10	23.5	22.23	-0.10	1	Right	Cheek	QPSK	25	0	28349	1:1	0.206	1.340	0.276	
782.00	23230	Mid	LTE Band 13	10	24.5	23.74	-0.04	0	Right	Tilt	QPSK	1	0	28349	1:1	0.212	1.191	0.252	
782.00	23230	Mid	LTE Band 13	10	23.5	22.23	0.00	1	Right	Tilt	QPSK	25	0	28349	1:1	0.150	1.340	0.201	
782.00	23230	Mid	LTE Band 13	10	24.5	23.74	0.06	0	Left	Cheek	QPSK	1	0	28349	1:1	0.268	1.191	0.319	
782.00	23230	Mid	LTE Band 13	10	23.5	22.23	0.06	1	Left	Cheek	QPSK	25	0	28349	1:1	0.193	1.340	0.259	
782.00	23230	Mid	LTE Band 13	10	24.5	23.74	0.05	0	Left	Tilt	QPSK	1	0	28349	1:1	0.171	1.191	0.204	
782.00	23230	Mid	LTE Band 13	10	23.5	22.23	0.10	1	Left	Tilt	QPSK	25	0	28349	1:1	0.122	1.340	0.163	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-8
LTE Band 5 (Cell) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	24.32	0.03	0	Right	Cheek	QPSK	1	0	13291	1:1	0.255	1.312	0.335	A8
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.97	0.03	1	Right	Cheek	QPSK	25	0	13291	1:1	0.190	1.422	0.270	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	24.32	0.06	0	Right	Tilt	QPSK	1	0	13291	1:1	0.152	1.312	0.199	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.97	0.08	1	Right	Tilt	QPSK	25	0	13291	1:1	0.112	1.422	0.159	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	24.32	-0.13	0	Left	Cheek	QPSK	1	0	13291	1:1	0.255	1.312	0.335	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.97	-0.02	1	Left	Cheek	QPSK	25	0	13291	1:1	0.193	1.422	0.274	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	24.32	0.08	0	Left	Tilt	QPSK	1	0	13291	1:1	0.160	1.312	0.210	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.97	0.05	1	Left	Tilt	QPSK	25	0	13291	1:1	0.120	1.422	0.171	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 58 of 93	

**Table 11-9
LTE Band 4 (AWS) Head SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.50	-0.01	0	Right	Cheek	QPSK	1	0	28349	1:1	0.277	1.259	0.349	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.08	0.04	1	Right	Cheek	QPSK	50	25	28349	1:1	0.203	1.387	0.282	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.50	0.05	0	Right	Tilt	QPSK	1	0	28349	1:1	0.308	1.259	0.388	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.08	-0.03	1	Right	Tilt	QPSK	50	25	28349	1:1	0.211	1.387	0.293	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.50	-0.02	0	Left	Cheek	QPSK	1	0	28349	1:1	0.579	1.259	0.729	A9
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.08	-0.02	1	Left	Cheek	QPSK	50	25	28349	1:1	0.415	1.387	0.576	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.50	-0.01	0	Left	Tilt	QPSK	1	0	28349	1:1	0.310	1.259	0.390	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.08	-0.03	1	Left	Tilt	QPSK	50	25	28349	1:1	0.229	1.387	0.318	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-10
LTE Band 2 (PCS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	21.52	-0.01	0	Right	Cheek	QPSK	1	50	13655	1:1	0.381	1.253	0.477	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.14	0.00	1	Right	Cheek	QPSK	50	0	13655	1:1	0.279	1.368	0.382	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	21.52	-0.15	0	Right	Tilt	QPSK	1	50	13655	1:1	0.222	1.253	0.278	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.14	0.00	1	Right	Tilt	QPSK	50	0	13655	1:1	0.175	1.368	0.239	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.5	21.45	-0.03	0	Left	Cheek	QPSK	1	50	13655	1:1	0.604	1.274	0.769	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	22.5	21.15	-0.03	0	Left	Cheek	QPSK	1	99	13655	1:1	0.663	1.365	0.905	A10
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	21.52	0.07	0	Left	Cheek	QPSK	1	50	13655	1:1	0.661	1.253	0.828	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.14	0.01	1	Left	Cheek	QPSK	50	0	13655	1:1	0.489	1.368	0.669	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.11	-0.03	1	Left	Cheek	QPSK	100	0	13655	1:1	0.487	1.377	0.671	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	21.52	-0.12	0	Left	Tilt	QPSK	1	50	13655	1:1	0.265	1.253	0.332	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.14	0.04	1	Left	Tilt	QPSK	50	0	13655	1:1	0.204	1.368	0.279	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-11
LTE Band 7 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2560.00	21350	High	LTE Band 7	20	22.5	21.77	-0.07	0	Right	Cheek	QPSK	1	99	28349	1:1	0.294	1.183	0.348	
2560.00	21350	High	LTE Band 7	20	21.5	20.64	0.03	1	Right	Cheek	QPSK	50	50	28349	1:1	0.228	1.219	0.278	
2560.00	21350	High	LTE Band 7	20	22.5	21.77	-0.12	0	Right	Tilt	QPSK	1	99	28349	1:1	0.330	1.183	0.390	
2560.00	21350	High	LTE Band 7	20	21.5	20.64	-0.06	1	Right	Tilt	QPSK	50	50	28349	1:1	0.248	1.219	0.302	
2560.00	21350	High	LTE Band 7	20	22.5	21.77	0.02	0	Left	Cheek	QPSK	1	99	28349	1:1	0.487	1.183	0.576	A11
2560.00	21350	High	LTE Band 7	20	21.5	20.64	-0.07	1	Left	Cheek	QPSK	50	50	28349	1:1	0.360	1.219	0.439	
2560.00	21350	High	LTE Band 7	20	22.5	21.77	-0.16	0	Left	Tilt	QPSK	1	99	28349	1:1	0.202	1.183	0.239	
2560.00	21350	High	LTE Band 7	20	21.5	20.64	0.20	1	Left	Tilt	QPSK	50	50	28349	1:1	0.168	1.219	0.205	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 59 of 93	

**Table 11-12
DTS Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	16.0	15.10	-0.15	Right	Cheek	34016	1	99.6	0.661	0.528	1.230	1.004	0.652	
2437	6	802.11b	DSSS	22	16.0	15.58	0.18	Right	Cheek	34016	1	99.6	0.857	0.635	1.102	1.004	0.703	
2462	11	802.11b	DSSS	22	16.0	15.25	0.09	Right	Cheek	34016	1	99.6	0.798	0.677	1.189	1.004	0.808	A12
2437	6	802.11b	DSSS	22	16.0	15.58	-0.19	Right	Tilt	34016	1	99.6	0.560	0.508	1.102	1.004	0.562	
2437	6	802.11b	DSSS	22	16.0	15.58	0.11	Left	Cheek	34016	1	99.6	0.370	0.356	1.102	1.004	0.394	
2437	6	802.11b	DSSS	22	16.0	15.58	-0.01	Left	Tilt	34016	1	99.6	0.436	-	1.102	1.004	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-13
NII Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5270	54	802.11n	OFDM	40	12.0	10.60	0.11	Right	Cheek	34016	13.5	97.7	1.414	0.605	1.380	1.024	0.855	
5310	62	802.11n	OFDM	40	9.0	8.66	0.17	Right	Cheek	34016	13.5	97.7	0.908	0.403	1.081	1.024	0.446	
5270	54	802.11n	OFDM	40	12.0	10.60	0.08	Right	Tilt	34016	13.5	97.7	1.392	0.617	1.380	1.024	0.872	
5310	62	802.11n	OFDM	40	9.0	8.66	-0.04	Right	Tilt	34016	13.5	97.7	0.906	0.396	1.081	1.024	0.438	
5270	54	802.11n	OFDM	40	12.0	10.60	0.12	Left	Cheek	34016	13.5	97.7	1.213	0.700	1.380	1.024	0.989	
5310	62	802.11n	OFDM	40	9.0	8.66	0.04	Left	Cheek	34016	13.5	97.7	0.781	0.437	1.081	1.024	0.484	
5270	54	802.11n	OFDM	40	12.0	10.60	0.19	Left	Tilt	34016	13.5	97.7	1.184	0.595	1.380	1.024	0.841	
5310	62	802.11n	OFDM	40	9.0	8.66	-0.07	Left	Tilt	34016	13.5	97.7	0.820	0.405	1.081	1.024	0.448	
5510	102	802.11n	OFDM	40	12.0	11.27	0.14	Right	Cheek	34016	13.5	97.7	1.437	0.668	1.183	1.024	0.809	
5630	126	802.11n	OFDM	40	12.0	11.11	0.16	Right	Cheek	34016	13.5	97.7	1.097	0.563	1.227	1.024	0.707	
5510	102	802.11n	OFDM	40	12.0	11.27	0.04	Right	Tilt	34016	13.5	97.7	1.511	0.652	1.183	1.024	0.790	
5510	102	802.11n	OFDM	40	12.0	11.27	0.08	Left	Cheek	34016	13.5	97.7	1.371	0.771	1.183	1.024	0.934	A13
5630	126	802.11n	OFDM	40	12.0	11.11	0.18	Left	Cheek	34016	13.5	97.7	1.005	0.612	1.227	1.024	0.769	
5510	102	802.11n	OFDM	40	12.0	11.27	0.04	Left	Tilt	34016	13.5	97.7	1.379	0.769	1.183	1.024	0.932	
5630	126	802.11n	OFDM	40	12.0	11.11	0.05	Left	Tilt	34016	13.5	97.7	1.290	0.707	1.227	1.024	0.888	
5755	151	802.11n	OFDM	40	12.0	11.24	0.19	Right	Cheek	34016	13.5	97.7	1.156	-	1.191	1.024	-	
5755	151	802.11n	OFDM	40	12.0	11.24	0.10	Right	Tilt	34016	13.5	97.7	1.207	0.508	1.191	1.024	0.620	
5755	151	802.11n	OFDM	40	12.0	11.24	-0.19	Left	Cheek	34016	13.5	97.7	1.208	0.664	1.191	1.024	0.810	
5795	159	802.11n	OFDM	40	12.0	11.13	0.06	Left	Cheek	34016	13.5	97.7	1.181	0.618	1.222	1.024	0.773	
5755	151	802.11n	OFDM	40	12.0	11.24	0.01	Left	Tilt	34016	13.5	97.7	1.118	-	1.191	1.024	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 60 of 93	

11.2 Standalone Body-Worn SAR Data

**Table 11-14
GSM/UMTS/CDMA Body-Worn SAR Data**



MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.52	384	Cell. CDMA	TDSO / SO32	25.5	24.28	-0.01	15 mm	28349	N/A	1:1	back	0.363	1.324	0.481	A14
1851.25	25	PCS CDMA	TDSO / SO32	24.5	23.82	-0.04	15 mm	13291	N/A	1:1	back	0.573	1.169	0.670	
1880.00	600	PCS CDMA	TDSO / SO32	24.5	23.76	0.02	15 mm	13291	N/A	1:1	back	0.627	1.186	0.744	
1908.75	1175	PCS CDMA	TDSO / SO32	24.5	23.89	0.04	15 mm	13291	N/A	1:1	back	0.689	1.151	0.793	A16
836.60	190	GSM 850	GSM	33.0	31.92	0.00	15 mm	13291	1	1:8.3	back	0.288	1.282	0.369	A18
1880.00	661	GSM 1900	GSM	30.0	28.97	0.00	15 mm	28349	1	1:8.3	back	0.230	1.268	0.292	A20
836.60	4183	UMTS 850	RMC	24.0	22.88	0.02	15 mm	28349	N/A	1:1	back	0.259	1.294	0.335	A22
1880.00	9400	UMTS 1900	RMC	23.0	22.31	-0.02	15 mm	28349	N/A	1:1	back	0.492	1.172	0.577	A24
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-15
LTE Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	24.5	23.74	-0.05	0	13291	QPSK	1	0	15 mm	back	1:1	0.476	1.191	0.567	A26
782.00	23230	Mid	LTE Band 13	10	23.5	22.23	0.00	1	13291	QPSK	25	0	15 mm	back	1:1	0.324	1.340	0.434	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	24.32	-0.01	0	28349	QPSK	1	0	15 mm	back	1:1	0.357	1.312	0.468	A28
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.97	0.00	1	28349	QPSK	25	0	15 mm	back	1:1	0.253	1.422	0.360	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.38	0.03	0	28349	QPSK	1	0	15 mm	back	1:1	0.408	1.294	0.528	A30
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.08	0.02	1	28349	QPSK	50	25	15 mm	back	1:1	0.309	1.387	0.429	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	23.49	0.03	0	28349	QPSK	1	50	15 mm	back	1:1	0.514	1.262	0.649	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	24.5	23.18	-0.08	0	28349	QPSK	1	99	15 mm	back	1:1	0.596	1.355	0.808	A32
1900.00	19100	High	LTE Band 2 (PCS)	20	24.5	23.45	0.09	0	28349	QPSK	1	50	15 mm	back	1:1	0.584	1.274	0.744	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	22.17	0.00	1	28349	QPSK	50	25	15 mm	back	1:1	0.377	1.358	0.512	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	22.16	0.00	1	28349	QPSK	100	0	15 mm	back	1:1	0.374	1.361	0.509	
2560.00	21350	High	LTE Band 7	20	23.5	22.95	-0.01	0	13291	QPSK	1	99	15 mm	back	1:1	0.459	1.135	0.521	A34
2560.00	21350	High	LTE Band 7	20	22.5	21.76	0.06	1	13291	QPSK	50	50	15 mm	back	1:1	0.359	1.186	0.426	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											



**Table 11-16
DTS Body-Worn SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												(W/kg)	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	16.0	15.58	0.05	15 mm	34016	1	back	99.6	0.098	0.083	1.102	1.004	0.092	A36
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 61 of 93	

**Table 11-17
NII Body-Worn SAR**



MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5300	60	802.11a	OFDM	20	16.0	15.49	-0.14	15 mm	34016	6	back	98.9	0.374	0.182	1.125	1.011	0.207	
5620	124	802.11a	OFDM	20	16.0	14.81	0.04	15 mm	34016	6	back	98.9	0.450	0.198	1.315	1.011	0.263	A38
5745	149	802.11a	OFDM	20	16.0	15.24	0.08	15 mm	34016	6	back	98.9	0.440	0.190	1.191	1.011	0.229	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body										
Spatial Peak								1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population								averaged over 1 gram										

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 62 of 93	

11.3 Standalone Hotspot SAR Data

**Table 11-18
GPRS/UMTS/CDMA Hotspot SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.52	384	Cell. CDMA	EVDO Rev. 0	25.0	23.70	0.00	10 mm	28349	N/A	1:1	back	0.367	1.349	0.495	A15
836.52	384	Cell. CDMA	EVDO Rev. 0	25.0	23.70	-0.03	10 mm	28349	N/A	1:1	front	0.268	1.349	0.362	
836.52	384	Cell. CDMA	EVDO Rev. 0	25.0	23.70	0.03	10 mm	28349	N/A	1:1	bottom	0.033	1.349	0.045	
836.52	384	Cell. CDMA	EVDO Rev. 0	25.0	23.70	0.03	10 mm	28349	N/A	1:1	right	0.195	1.349	0.263	
836.52	384	Cell. CDMA	EVDO Rev. 0	25.0	23.70	-0.01	10 mm	28349	N/A	1:1	left	0.226	1.349	0.305	
1851.25	25	PCS CDMA	EVDO Rev. 0	21.5	20.44	-0.02	10 mm	13655	N/A	1:1	back	0.596	1.276	0.760	
1880.00	600	PCS CDMA	EVDO Rev. 0	21.5	20.37	-0.02	10 mm	13655	N/A	1:1	back	0.602	1.297	0.781	
1908.75	1175	PCS CDMA	EVDO Rev. 0	21.5	20.49	0.00	10 mm	13655	N/A	1:1	back	0.674	1.262	0.851	A17
1880.00	600	PCS CDMA	EVDO Rev. 0	21.5	20.37	0.03	10 mm	13655	N/A	1:1	front	0.561	1.297	0.728	
1880.00	600	PCS CDMA	EVDO Rev. 0	21.5	20.37	0.01	10 mm	13655	N/A	1:1	bottom	0.127	1.297	0.165	
1880.00	600	PCS CDMA	EVDO Rev. 0	21.5	20.37	0.00	10 mm	13655	N/A	1:1	right	0.062	1.297	0.080	
1880.00	600	PCS CDMA	EVDO Rev. 0	21.5	20.37	-0.03	10 mm	13655	N/A	1:1	left	0.467	1.297	0.606	
836.60	190	GSM 850	GPRS	28.0	27.66	0.17	10 mm	13291	4	1:2.076	back	0.460	1.081	0.497	A19
836.60	190	GSM 850	GPRS	28.0	27.66	-0.03	10 mm	13291	4	1:2.076	front	0.334	1.081	0.361	
836.60	190	GSM 850	GPRS	28.0	27.66	0.05	10 mm	13291	4	1:2.076	bottom	0.046	1.081	0.050	
836.60	190	GSM 850	GPRS	28.0	27.66	0.02	10 mm	13291	4	1:2.076	right	0.266	1.081	0.288	
836.60	190	GSM 850	GPRS	28.0	27.66	0.08	10 mm	13291	4	1:2.076	left	0.297	1.081	0.321	
1850.20	512	GSM 1900	GPRS	26.0	24.90	0.19	10 mm	28349	3	1:2.76	back	0.405	1.288	0.522	
1880.00	661	GSM 1900	GPRS	26.0	25.15	0.02	10 mm	28349	3	1:2.76	back	0.596	1.216	0.725	
1909.80	810	GSM 1900	GPRS	26.0	25.39	0.01	10 mm	28349	3	1:2.76	back	0.676	1.151	0.778	A21
1880.00	661	GSM 1900	GPRS	26.0	25.15	-0.03	10 mm	28349	3	1:2.76	front	0.533	1.216	0.648	
1880.00	661	GSM 1900	GPRS	26.0	25.15	-0.15	10 mm	28349	3	1:2.76	bottom	0.104	1.216	0.126	
1880.00	661	GSM 1900	GPRS	26.0	25.15	-0.01	10 mm	28349	3	1:2.76	right	0.055	1.216	0.067	
1880.00	661	GSM 1900	GPRS	26.0	25.15	0.03	10 mm	28349	3	1:2.76	left	0.411	1.216	0.500	
836.60	4183	UMTS 850	RMC	24.0	22.88	-0.01	10 mm	28349	N/A	1:1	back	0.299	1.294	0.387	A23
836.60	4183	UMTS 850	RMC	24.0	22.88	-0.03	10 mm	28349	N/A	1:1	front	0.225	1.294	0.291	
836.60	4183	UMTS 850	RMC	24.0	22.88	0.05	10 mm	28349	N/A	1:1	bottom	0.031	1.294	0.040	
836.60	4183	UMTS 850	RMC	24.0	22.88	0.03	10 mm	28349	N/A	1:1	right	0.175	1.294	0.226	
836.60	4183	UMTS 850	RMC	24.0	22.88	0.03	10 mm	28349	N/A	1:1	left	0.194	1.294	0.251	
1852.40	9262	UMTS 1900	RMC	21.5	21.12	0.02	10 mm	13655	N/A	1:1	back	0.579	1.091	0.632	
1880.00	9400	UMTS 1900	RMC	21.5	20.87	-0.01	10 mm	13655	N/A	1:1	back	0.707	1.156	0.817	A25
1907.60	9538	UMTS 1900	RMC	21.5	21.19	0.03	10 mm	13655	N/A	1:1	back	0.673	1.074	0.723	
1880.00	9400	UMTS 1900	RMC	21.5	20.87	0.03	10 mm	13655	N/A	1:1	front	0.630	1.156	0.728	
1880.00	9400	UMTS 1900	RMC	21.5	20.87	0.12	10 mm	13655	N/A	1:1	bottom	0.127	1.156	0.147	
1880.00	9400	UMTS 1900	RMC	21.5	20.87	-0.03	10 mm	13655	N/A	1:1	right	0.050	1.156	0.058	
1880.00	9400	UMTS 1900	RMC	21.5	20.87	-0.07	10 mm	13655	N/A	1:1	left	0.513	1.156	0.593	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak							Body 1.6 W/kg (mW/g) averaged over 1 gram								
Uncontrolled Exposure/General Population															

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 63 of 93	

**Table 11-19
LTE Band 13 Hotspot SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
782.00	23230	Mid	LTE Band 13	10	24.5	23.74	0.01	0	13291	QPSK	1	0	10 mm	back	1:1	0.516	1.191	0.615	A27
782.00	23230	Mid	LTE Band 13	10	23.5	22.23	-0.02	1	13291	QPSK	25	0	10 mm	back	1:1	0.350	1.340	0.469	
782.00	23230	Mid	LTE Band 13	10	24.5	23.74	-0.01	0	13291	QPSK	1	0	10 mm	front	1:1	0.345	1.191	0.411	
782.00	23230	Mid	LTE Band 13	10	23.5	22.23	0.01	1	13291	QPSK	25	0	10 mm	front	1:1	0.239	1.340	0.320	
782.00	23230	Mid	LTE Band 13	10	24.5	23.74	-0.01	0	13291	QPSK	1	0	10 mm	bottom	1:1	0.051	1.191	0.061	
782.00	23230	Mid	LTE Band 13	10	23.5	22.23	-0.05	1	13291	QPSK	25	0	10 mm	bottom	1:1	0.034	1.340	0.046	
782.00	23230	Mid	LTE Band 13	10	24.5	23.74	0.00	0	13291	QPSK	1	0	10 mm	right	1:1	0.404	1.191	0.481	
782.00	23230	Mid	LTE Band 13	10	23.5	22.23	0.03	1	13291	QPSK	25	0	10 mm	right	1:1	0.277	1.340	0.371	
782.00	23230	Mid	LTE Band 13	10	24.5	23.74	0.01	0	13291	QPSK	1	0	10 mm	left	1:1	0.395	1.191	0.470	
782.00	23230	Mid	LTE Band 13	10	23.5	22.23	0.00	1	13291	QPSK	25	0	10 mm	left	1:1	0.265	1.340	0.355	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-20
LTE Band 5 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	24.32	-0.04	0	28349	QPSK	1	0	10 mm	back	1:1	0.402	1.312	0.527	A29
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.97	-0.01	1	28349	QPSK	25	0	10 mm	back	1:1	0.287	1.422	0.408	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	24.32	-0.03	0	28349	QPSK	1	0	10 mm	front	1:1	0.303	1.312	0.398	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.97	0.00	1	28349	QPSK	25	0	10 mm	front	1:1	0.216	1.422	0.307	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	24.32	0.07	0	28349	QPSK	1	0	10 mm	bottom	1:1	0.043	1.312	0.056	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.97	-0.01	1	28349	QPSK	25	0	10 mm	bottom	1:1	0.031	1.422	0.044	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	24.32	-0.02	0	28349	QPSK	1	0	10 mm	right	1:1	0.258	1.312	0.338	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.97	0.00	1	28349	QPSK	25	0	10 mm	right	1:1	0.180	1.422	0.256	
836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	24.32	0.06	0	28349	QPSK	1	0	10 mm	left	1:1	0.254	1.312	0.333	
836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	22.97	-0.05	1	28349	QPSK	25	0	10 mm	left	1:1	0.186	1.422	0.264	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-21
LTE Band 4 (AWS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.50	-0.01	0	13655	QPSK	1	0	10 mm	back	1:1	0.560	1.259	0.705	A31
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.08	-0.13	1	13655	QPSK	50	25	10 mm	back	1:1	0.431	1.387	0.598	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.50	-0.06	0	13655	QPSK	1	0	10 mm	front	1:1	0.513	1.259	0.646	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.08	-0.01	1	13655	QPSK	50	25	10 mm	front	1:1	0.400	1.387	0.555	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.50	-0.02	0	13655	QPSK	1	0	10 mm	bottom	1:1	0.202	1.259	0.254	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.08	0.03	1	13655	QPSK	50	25	10 mm	bottom	1:1	0.149	1.387	0.207	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.50	0.04	0	13655	QPSK	1	0	10 mm	right	1:1	0.072	1.259	0.091	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.08	0.04	1	13655	QPSK	50	25	10 mm	right	1:1	0.052	1.387	0.072	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.50	0.06	0	13655	QPSK	1	0	10 mm	left	1:1	0.327	1.259	0.412	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.08	0.05	1	13655	QPSK	50	25	10 mm	left	1:1	0.264	1.387	0.366	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 64 of 93	

**Table 11-22
LTE Band 2 (PCS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.5	21.45	-0.01	0	13655	QPSK	1	50	10 mm	back	1:1	0.658	1.274	0.838	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	22.5	21.15	0.00	0	13655	QPSK	1	99	10 mm	back	1:1	0.736	1.365	1.005	A33
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	21.52	-0.14	0	13655	QPSK	1	50	10 mm	back	1:1	0.681	1.253	0.853	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.14	0.03	1	13655	QPSK	50	0	10 mm	back	1:1	0.508	1.368	0.695	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.11	-0.02	1	13655	QPSK	100	0	10 mm	back	1:1	0.541	1.377	0.745	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.5	21.45	0.00	0	13655	QPSK	1	50	10 mm	front	1:1	0.653	1.274	0.832	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	22.5	21.15	0.05	0	13655	QPSK	1	99	10 mm	front	1:1	0.716	1.365	0.977	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	21.52	-0.10	0	13655	QPSK	1	50	10 mm	front	1:1	0.726	1.253	0.910	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.14	-0.18	1	13655	QPSK	50	0	10 mm	front	1:1	0.554	1.368	0.758	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.11	0.03	1	13655	QPSK	100	0	10 mm	front	1:1	0.524	1.377	0.722	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	21.52	0.04	0	13655	QPSK	1	50	10 mm	bottom	1:1	0.155	1.253	0.194	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.14	0.01	1	13655	QPSK	50	0	10 mm	bottom	1:1	0.112	1.368	0.153	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	21.52	-0.12	0	13655	QPSK	1	50	10 mm	right	1:1	0.058	1.253	0.073	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.14	-0.14	1	13655	QPSK	50	0	10 mm	right	1:1	0.040	1.368	0.055	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	21.52	0.01	0	13655	QPSK	1	50	10 mm	left	1:1	0.564	1.253	0.707	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.14	0.00	1	13655	QPSK	50	0	10 mm	left	1:1	0.422	1.368	0.577	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									



**Table 11-23
LTE Band 7 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
2510.00	20850	Low	LTE Band 7	20	22.5	21.49	0.03	0	13655	QPSK	1	99	10 mm	back	1:1	0.641	1.262	0.809	
2535.00	21100	Mid	LTE Band 7	20	22.5	21.72	0.12	0	13655	QPSK	1	99	10 mm	back	1:1	0.701	1.197	0.839	
2560.00	21350	High	LTE Band 7	20	22.5	21.77	0.06	0	13655	QPSK	1	99	10 mm	back	1:1	0.766	1.183	0.906	A35
2560.00	21350	High	LTE Band 7	20	21.5	20.64	0.03	1	13655	QPSK	50	50	10 mm	back	1:1	0.591	1.219	0.720	
2560.00	21350	High	LTE Band 7	20	21.5	20.48	0.04	1	13655	QPSK	100	0	10 mm	back	1:1	0.567	1.265	0.717	
2510.00	20850	Low	LTE Band 7	20	22.5	21.49	0.01	0	13655	QPSK	1	99	10 mm	front	1:1	0.664	1.262	0.838	
2535.00	21100	Mid	LTE Band 7	20	22.5	21.72	0.11	0	13655	QPSK	1	99	10 mm	front	1:1	0.710	1.197	0.850	
2560.00	21350	High	LTE Band 7	20	22.5	21.77	-0.06	0	13655	QPSK	1	99	10 mm	front	1:1	0.742	1.183	0.878	
2560.00	21350	High	LTE Band 7	20	21.5	20.64	-0.01	1	13655	QPSK	50	50	10 mm	front	1:1	0.559	1.219	0.681	
2560.00	21350	High	LTE Band 7	20	21.5	20.48	-0.01	1	13655	QPSK	100	0	10 mm	front	1:1	0.570	1.265	0.721	
2560.00	21350	High	LTE Band 7	20	22.5	21.77	-0.03	0	13655	QPSK	1	99	10 mm	bottom	1:1	0.367	1.183	0.434	
2560.00	21350	High	LTE Band 7	20	21.5	20.64	0.03	1	13655	QPSK	50	50	10 mm	bottom	1:1	0.293	1.219	0.357	
2560.00	21350	High	LTE Band 7	20	22.5	21.77	0.17	0	13655	QPSK	1	99	10 mm	right	1:1	0.079	1.183	0.093	
2560.00	21350	High	LTE Band 7	20	21.5	20.64	0.05	1	13655	QPSK	50	50	10 mm	right	1:1	0.069	1.219	0.084	
2560.00	21350	High	LTE Band 7	20	22.5	21.77	-0.01	0	13655	QPSK	1	99	10 mm	left	1:1	0.400	1.183	0.473	
2560.00	21350	High	LTE Band 7	20	21.5	20.64	0.06	1	13655	QPSK	50	50	10 mm	left	1:1	0.319	1.219	0.389	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 65 of 93	

**Table 11-24
WLAN Hotspot SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	16.0	15.58	-0.13	10 mm	34016	1	back	99.6	0.201	0.168	1.102	1.004	0.186	A37
2437	6	802.11b	DSSS	22	16.0	15.58	0.12	10 mm	34016	1	front	99.6	0.183	-	1.102	1.004	-	
2437	6	802.11b	DSSS	22	16.0	15.58	0.17	10 mm	34016	1	top	99.6	0.090	-	1.102	1.004	-	
2437	6	802.11b	DSSS	22	16.0	15.58	0.14	10 mm	34016	1	right	99.6	0.034	-	1.102	1.004	-	
2437	6	802.11b	DSSS	22	16.0	15.58	0.12	10 mm	34016	1	left	99.6	0.105	-	1.102	1.004	-	
5745	149	802.11a	OFDM	20	16.0	15.24	-0.08	10 mm	34016	6	back	98.9	0.693	-	1.191	1.011	-	
5745	149	802.11a	OFDM	20	16.0	15.24	0.18	10 mm	34016	6	front	98.9	0.850	0.378	1.191	1.011	0.455	A39
5745	149	802.11a	OFDM	20	16.0	15.24	0.12	10 mm	34016	6	top	98.9	0.893	0.376	1.191	1.011	0.453	
5745	149	802.11a	OFDM	20	16.0	15.24	0.18	10 mm	34016	6	right	98.9	0.539	-	1.191	1.011	-	
5745	149	802.11a	OFDM	20	16.0	15.24	0.10	10 mm	34016	6	left	98.9	0.010	-	1.191	1.011	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 66 of 93	

11.4 Standalone Phablet SAR Data

**Table 11-25
UMTS/CDMA Phablet SAR Data**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1851.25	25	PCS CDMA	EVDO Rev. 0	24.5	23.76	0.00	2 mm	28349	1:1	back	2.620	1.186	3.107	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.5	23.68	0.09	2 mm	28349	1:1	back	2.490	1.208	3.008	
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.5	23.81	0.01	2 mm	28349	1:1	back	2.540	1.172	2.977	
1851.25	25	PCS CDMA	EVDO Rev. 0	24.5	23.76	0.01	2 mm	28349	1:1	front	2.700	1.186	3.202	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.5	23.68	-0.04	2 mm	28349	1:1	front	2.610	1.208	3.153	
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.5	23.81	-0.01	2 mm	28349	1:1	front	2.560	1.172	3.000	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.5	23.68	0.19	2 mm	28349	1:1	bottom	0.345	1.208	0.417	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.5	23.68	0.12	0 mm	28349	1:1	right	0.058	1.208	0.070	
1851.25	25	PCS CDMA	EVDO Rev. 0	24.5	23.76	-0.10	0 mm	28349	1:1	left	2.120	1.186	2.514	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.5	23.68	0.07	0 mm	28349	1:1	left	2.070	1.208	2.501	
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.5	23.81	-0.01	0 mm	28349	1:1	left	1.990	1.172	2.332	
1851.25	25	PCS CDMA	EVDO Rev. 0	21.5	20.44	-0.02	0 mm	13655	1:1	back	1.860	1.276	2.373	
1880.00	600	PCS CDMA	EVDO Rev. 0	21.5	20.37	0.03	0 mm	13655	1:1	back	1.780	1.297	2.309	
1908.75	1175	PCS CDMA	EVDO Rev. 0	21.5	20.49	0.01	0 mm	13655	1:1	back	1.820	1.262	2.297	
1851.25	25	PCS CDMA	EVDO Rev. 0	21.5	20.44	-0.12	0 mm	13655	1:1	front	1.830	1.276	2.335	
1880.00	600	PCS CDMA	EVDO Rev. 0	21.5	20.37	0.06	0 mm	13655	1:1	front	1.840	1.297	2.386	
1908.75	1175	PCS CDMA	EVDO Rev. 0	21.5	20.49	-0.05	0 mm	13655	1:1	front	1.830	1.262	2.309	
1880.00	600	PCS CDMA	EVDO Rev. 0	21.5	20.37	-0.05	0 mm	13655	1:1	bottom	0.187	1.297	0.243	
1851.25	25	PCS CDMA	EVDO Rev. 0	24.5	23.76	0.02	2 mm	28349	1:1	front	2.760	1.186	3.273	A40
1880.00	9400	UMTS 1900	RMC	23.0	22.31	0.00	2 mm	28349	1:1	back	1.700	1.172	1.992	
1852.40	9262	UMTS 1900	RMC	23.0	22.55	0.02	2 mm	28349	1:1	front	1.580	1.109	1.752	
1880.00	9400	UMTS 1900	RMC	23.0	22.31	-0.04	2 mm	28349	1:1	front	1.730	1.172	2.028	
1907.60	9538	UMTS 1900	RMC	23.0	22.51	0.01	2 mm	28349	1:1	front	1.540	1.119	1.723	
1880.00	9400	UMTS 1900	RMC	23.0	22.31	0.02	2 mm	28349	1:1	bottom	0.250	1.172	0.293	
1880.00	9400	UMTS 1900	RMC	23.0	22.31	0.09	0 mm	28349	1:1	right	0.051	1.172	0.060	
1880.00	9400	UMTS 1900	RMC	23.0	22.31	-0.07	0 mm	28349	1:1	left	1.500	1.172	1.758	
1852.40	9262	UMTS 1900	RMC	21.5	21.12	0.00	0 mm	13655	1:1	back	1.870	1.091	2.040	
1880.00	9400	UMTS 1900	RMC	21.5	20.87	0.04	0 mm	13655	1:1	back	2.010	1.156	2.324	
1907.60	9538	UMTS 1900	RMC	21.5	21.19	-0.02	0 mm	13655	1:1	back	1.860	1.074	1.998	
1852.40	9262	UMTS 1900	RMC	21.5	21.12	0.02	0 mm	13655	1:1	front	1.870	1.091	2.040	
1880.00	9400	UMTS 1900	RMC	21.5	20.87	0.03	0 mm	13655	1:1	front	2.010	1.156	2.324	A41
1907.60	9538	UMTS 1900	RMC	21.5	21.19	0.07	0 mm	13655	1:1	front	1.820	1.074	1.955	
1880.00	9400	UMTS 1900	RMC	21.5	20.87	-0.20	0 mm	13655	1:1	bottom	0.187	1.156	0.216	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams							

Note: Blue entry represents variability measurement.





FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 67 of 93	

Table 11-26
LTE Band 4 (AWS) Phablet SAR



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.38	-0.04	0	13291	QPSK	1	0	2 mm	back	1:1	2.360	1.294	3.054	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.08	-0.04	1	13291	QPSK	50	25	2 mm	back	1:1	1.790	1.387	2.483	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.07	-0.07	1	13291	QPSK	100	0	2 mm	back	1:1	1.780	1.390	2.474	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.38	0.08	0	13291	QPSK	1	0	2 mm	front	1:1	2.260	1.294	2.924	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.08	0.12	1	13291	QPSK	50	25	2 mm	front	1:1	1.720	1.387	2.386	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.07	-0.01	1	13291	QPSK	100	0	2 mm	front	1:1	1.720	1.390	2.391	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.38	-0.02	0	13291	QPSK	1	0	2 mm	bottom	1:1	0.448	1.294	0.580	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.08	-0.07	1	13291	QPSK	50	25	2 mm	bottom	1:1	0.342	1.387	0.474	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.38	0.18	0	13291	QPSK	1	0	0 mm	right	1:1	0.181	1.294	0.234	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.08	0.01	1	13291	QPSK	50	25	0 mm	right	1:1	0.117	1.387	0.162	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	24.5	23.38	-0.01	0	13291	QPSK	1	0	0 mm	left	1:1	1.540	1.294	1.993	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.5	22.08	-0.05	1	13291	QPSK	50	25	0 mm	left	1:1	1.170	1.387	1.623	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.50	-0.08	0	13655	QPSK	1	0	0 mm	back	1:1	2.420	1.259	3.047	A42
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.08	0.05	1	13655	QPSK	50	25	0 mm	back	1:1	1.820	1.387	2.524	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.07	-0.03	1	13655	QPSK	100	0	0 mm	back	1:1	1.810	1.390	2.516	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.50	-0.02	0	13655	QPSK	1	0	0 mm	front	1:1	2.260	1.259	2.845	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.08	0.18	1	13655	QPSK	50	25	0 mm	front	1:1	1.720	1.387	2.386	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.07	0.02	1	13655	QPSK	100	0	0 mm	front	1:1	1.710	1.390	2.377	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.50	-0.01	0	13655	QPSK	1	0	0 mm	bottom	1:1	0.311	1.259	0.392	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	20.08	0.01	1	13655	QPSK	50	25	0 mm	bottom	1:1	0.234	1.387	0.325	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.5	21.50	0.05	0	13655	QPSK	1	0	0 mm	back	1:1	2.270	1.259	2.858	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Phablet 4.0 W/kg (mW/g) averaged over 10 grams											

Note: Blue entry represents variability measurement.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 68 of 93	

**Table 11-27
LTE Band 2 (PCS) Phablet SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	23.49	-0.03	0	28349	QPSK	1	50	2 mm	back	1:1	2.340	1.262	2.953	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	24.5	23.18	0.06	0	28349	QPSK	1	99	2 mm	back	1:1	2.400	1.355	3.252	A43
1900.00	19100	High	LTE Band 2 (PCS)	20	24.5	23.45	-0.07	0	28349	QPSK	1	50	2 mm	back	1:1	2.310	1.274	2.943	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	22.17	-0.01	1	28349	QPSK	50	25	2 mm	back	1:1	1.740	1.358	2.363	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.5	21.76	0.00	1	28349	QPSK	50	25	2 mm	back	1:1	1.800	1.493	2.687	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.5	22.12	0.00	1	28349	QPSK	50	25	2 mm	back	1:1	1.730	1.374	2.377	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	22.16	0.02	1	28349	QPSK	100	0	2 mm	back	1:1	1.730	1.361	2.355	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	23.49	0.04	0	28349	QPSK	1	50	2 mm	front	1:1	2.130	1.262	2.688	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	24.5	23.18	0.03	0	28349	QPSK	1	99	2 mm	front	1:1	2.140	1.355	2.900	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.5	23.45	0.00	0	28349	QPSK	1	50	2 mm	front	1:1	2.060	1.274	2.624	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	22.17	0.00	1	28349	QPSK	50	25	2 mm	front	1:1	1.570	1.358	2.132	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.5	21.76	0.03	1	28349	QPSK	50	25	2 mm	front	1:1	1.620	1.493	2.419	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.5	22.12	0.02	1	28349	QPSK	50	25	2 mm	front	1:1	1.580	1.374	2.171	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	22.16	-0.02	1	28349	QPSK	100	0	2 mm	front	1:1	1.590	1.361	2.164	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	23.49	0.09	0	28349	QPSK	1	50	2 mm	bottom	1:1	0.244	1.262	0.308	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	22.17	0.00	1	28349	QPSK	50	25	2 mm	bottom	1:1	0.176	1.358	0.239	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	23.49	0.10	0	28349	QPSK	1	50	0 mm	right	1:1	0.075	1.262	0.095	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	22.17	-0.02	1	28349	QPSK	50	25	0 mm	right	1:1	0.056	1.358	0.076	
1860.00	18700	Low	LTE Band 2 (PCS)	20	24.5	23.49	-0.17	0	28349	QPSK	1	50	0 mm	left	1:1	1.740	1.262	2.196	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	24.5	23.18	0.06	0	28349	QPSK	1	99	0 mm	left	1:1	1.780	1.355	2.412	
1900.00	19100	High	LTE Band 2 (PCS)	20	24.5	23.45	0.00	0	28349	QPSK	1	50	0 mm	left	1:1	1.780	1.274	2.268	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	22.17	0.09	1	28349	QPSK	50	25	0 mm	left	1:1	1.360	1.358	1.847	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.5	22.16	0.01	1	28349	QPSK	100	0	0 mm	left	1:1	1.350	1.361	1.837	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.5	21.45	0.03	0	13655	QPSK	1	50	0 mm	back	1:1	2.150	1.274	2.739	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	22.5	21.15	0.01	0	13655	QPSK	1	99	0 mm	back	1:1	2.220	1.365	3.030	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	21.52	0.03	0	13655	QPSK	1	50	0 mm	back	1:1	2.180	1.253	2.732	
1860.00	18700	Low	LTE Band 2 (PCS)	20	21.5	20.10	-0.02	1	13655	QPSK	50	0	0 mm	back	1:1	1.660	1.380	2.291	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	21.5	19.73	-0.01	1	13655	QPSK	50	50	0 mm	back	1:1	1.690	1.503	2.540	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.14	-0.02	1	13655	QPSK	50	0	0 mm	back	1:1	1.650	1.368	2.257	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.11	-0.05	1	13655	QPSK	100	0	0 mm	back	1:1	1.620	1.377	2.231	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.5	21.45	0.02	0	13655	QPSK	1	50	0 mm	front	1:1	1.780	1.274	2.268	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	22.5	21.15	0.05	0	13655	QPSK	1	99	0 mm	front	1:1	1.860	1.365	2.539	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	21.52	0.06	0	13655	QPSK	1	50	0 mm	front	1:1	1.820	1.253	2.280	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.14	0.03	1	13655	QPSK	50	0	0 mm	front	1:1	1.350	1.368	1.847	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.11	-0.04	1	13655	QPSK	100	0	0 mm	front	1:1	1.350	1.377	1.859	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.5	21.52	-0.05	0	13655	QPSK	1	50	0 mm	bottom	1:1	0.306	1.253	0.383	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.5	20.14	-0.05	1	13655	QPSK	50	0	0 mm	bottom	1:1	0.212	1.368	0.290	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Phablet 4.0 W/kg (mW/g) averaged over 10 grams										

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 69 of 93	



**Table 11-28
LTE Band 7 Phablet SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g) (W/kg)	Scaling Factor	Reported SAR (10g) (W/kg)	Plot #
MHz	Ch.																		
2510.00	20850	Low	LTE Band 7	20	23.5	22.56	0.02	0	13291	QPSK	1	99	2 mm	back	1:1	1.720	1.242	2.136	
2535.00	21100	Mid	LTE Band 7	20	23.5	22.74	0.01	0	13291	QPSK	1	50	2 mm	back	1:1	1.780	1.191	2.120	
2560.00	21350	High	LTE Band 7	20	23.5	22.95	0.09	0	13291	QPSK	1	99	2 mm	back	1:1	1.820	1.135	2.066	
2560.00	21350	High	LTE Band 7	20	22.5	21.76	0.02	1	13291	QPSK	50	50	2 mm	back	1:1	1.430	1.186	1.696	
2560.00	21350	High	LTE Band 7	20	22.5	21.68	-0.03	1	13291	QPSK	100	0	2 mm	back	1:1	1.360	1.208	1.643	
2560.00	21350	High	LTE Band 7	20	23.5	22.95	0.01	0	13291	QPSK	1	99	2 mm	front	1:1	1.660	1.135	1.884	
2560.00	21350	High	LTE Band 7	20	22.5	21.76	-0.10	1	13291	QPSK	50	50	2 mm	front	1:1	1.300	1.186	1.542	
2560.00	21350	High	LTE Band 7	20	23.5	22.95	-0.19	0	13291	QPSK	1	99	2 mm	bottom	1:1	0.803	1.135	0.911	
2560.00	21350	High	LTE Band 7	20	22.5	21.76	0.05	1	13291	QPSK	50	50	2 mm	bottom	1:1	0.624	1.186	0.740	
2560.00	21350	High	LTE Band 7	20	23.5	22.95	0.14	0	13291	QPSK	1	99	0 mm	right	1:1	0.112	1.135	0.127	
2560.00	21350	High	LTE Band 7	20	22.5	21.76	0.02	1	13291	QPSK	50	50	0 mm	right	1:1	0.092	1.186	0.109	
2560.00	21350	High	LTE Band 7	20	23.5	22.95	-0.04	0	13291	QPSK	1	99	0 mm	left	1:1	1.170	1.135	1.328	
2560.00	21350	High	LTE Band 7	20	22.5	21.76	-0.12	1	13291	QPSK	50	50	0 mm	left	1:1	0.901	1.186	1.069	
2510.00	20850	Low	LTE Band 7	20	22.5	21.49	-0.03	0	13655	QPSK	1	99	0 mm	back	1:1	1.990	1.262	2.511	
2535.00	21100	Mid	LTE Band 7	20	22.5	21.72	-0.05	0	13655	QPSK	1	99	0 mm	back	1:1	1.980	1.197	2.370	
2560.00	21350	High	LTE Band 7	20	22.5	21.77	0.12	0	13655	QPSK	1	99	0 mm	back	1:1	2.210	1.183	2.614	A44
2560.00	21350	High	LTE Band 7	20	21.5	20.64	0.01	1	13655	QPSK	50	50	0 mm	back	1:1	1.590	1.219	1.938	
2560.00	21350	High	LTE Band 7	20	21.5	20.48	-0.02	1	13655	QPSK	100	0	0 mm	back	1:1	1.650	1.265	2.087	
2510.00	20850	Low	LTE Band 7	20	22.5	21.49	-0.01	0	13655	QPSK	1	99	0 mm	front	1:1	1.760	1.262	2.221	
2535.00	21100	Mid	LTE Band 7	20	22.5	21.72	-0.10	0	13655	QPSK	1	99	0 mm	front	1:1	1.820	1.197	2.179	
2560.00	21350	High	LTE Band 7	20	22.5	21.77	-0.05	0	13655	QPSK	1	99	0 mm	front	1:1	1.820	1.183	2.153	
2560.00	21350	High	LTE Band 7	20	21.5	20.64	-0.13	1	13655	QPSK	50	50	0 mm	front	1:1	1.460	1.219	1.780	
2560.00	21350	High	LTE Band 7	20	21.5	20.48	-0.05	1	13655	QPSK	100	0	0 mm	front	1:1	1.470	1.265	1.860	
2560.00	21350	High	LTE Band 7	20	22.5	21.77	-0.02	0	13655	QPSK	1	99	0 mm	bottom	1:1	1.010	1.183	1.195	
2560.00	21350	High	LTE Band 7	20	21.5	20.64	0.01	1	13655	QPSK	50	50	0 mm	bottom	1:1	0.802	1.219	0.978	
2560.00	21350	High	LTE Band 7	20	22.5	21.77	0.02	0	13655	QPSK	1	99	0 mm	back	1:1	2.160	1.183	2.555	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Phablet 4.0 W/kg (mW/g) averaged over 10 grams									

Note: Blue entry represents variability measurement.

**Table 11-29
WLAN Phablet SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan (W/kg)	SAR (10g) (W/kg)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g) (W/kg)	Plot #
MHz	Ch.																	
5300	60	802.11a	OFDM	20	16.0	15.49	0.17	0 mm	34016	6	back	98.9	5.239	0.891	1.125	1.011	1.013	
5300	60	802.11a	OFDM	20	16.0	15.49	0.13	0 mm	34016	6	front	98.9	6.939	-	1.125	1.011	-	
5300	60	802.11a	OFDM	20	16.0	15.49	-0.18	0 mm	34016	6	top	98.9	8.245	0.773	1.125	1.011	0.879	
5300	60	802.11a	OFDM	20	16.0	15.49	0.14	0 mm	34016	6	right	98.9	1.919	-	1.125	1.011	-	
5300	60	802.11a	OFDM	20	16.0	15.49	0.10	0 mm	34016	6	left	98.9	0.399	-	1.125	1.011	-	
5620	124	802.11a	OFDM	20	16.0	14.81	0.18	0 mm	34016	6	back	98.9	5.951	0.936	1.315	1.011	1.244	
5620	124	802.11a	OFDM	20	16.0	14.81	0.14	0 mm	34016	6	front	98.9	6.012	0.797	1.315	1.011	1.060	
5620	124	802.11a	OFDM	20	16.0	14.81	-0.13	0 mm	34016	6	top	98.9	11.014	1.010	1.315	1.011	1.343	A45
5620	124	802.11a	OFDM	20	16.0	14.81	-0.10	0 mm	34016	6	right	98.9	1.391	-	1.315	1.011	-	
5620	124	802.11a	OFDM	20	16.0	14.81	0.10	0 mm	34016	6	left	98.9	0.147	-	1.315	1.011	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Phablet 4.0 W/kg (mW/g) averaged over 10 grams								

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 70 of 93	



11.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
10. Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is > 160 mm and < 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.
11. This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.
12. Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds below.
13. Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information).

GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.
4. There was no power reduction for GPRS/EDGE modes. Therefore Hotspot SAR Evaluations (and phablet SAR Exclusion analysis) were performed at the maximum allowed output power.

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 71 of 93	

CDMA Notes:

1. Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v03r01.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO Rev0 and RevA and TDSO / SO32 FCH+SCH SAR tests were not required per the 3G SAR Test Reduction Procedure in FCC KDB Publication 941225 D01v03r01.
3. CDMA Wireless Router SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01v03r01 procedures for data devices. Wireless Router SAR tests for Subtype 2 of Rev.A and 1x RTT configurations were not required per the 3G SAR Test Reduction Policy in KDB Publication 941225 D01v03r01.
4. Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
5. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.
6. CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1X Advanced was not more than 0.25 dB higher than the maximum powers for 1X.

UMTS Notes:



1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:



1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.6.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

WLAN Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.7.5 for more information.

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 72 of 93	

3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 8.7.6 for more information.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 73 of 93

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{\text{1g SAR (Max Power of channel, mW)}}{\text{Min. Separation Distance, mm}}$$

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 10g SAR for simultaneous transmission assessment involving that transmitter.



$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{18.75} * \frac{\text{(Max Power of channel, mW)}}{\text{Min. Separation Distance, mm}}$$

**Table 12-1
Estimated SAR**

Mode	Frequency	Maximum Allowed Power	Separation Distance (Head)	Estimated SAR (1g Head)	Separation Distance (Body)	Estimated SAR (1g Body)	Separation Distance (Phablet)	Estimated SAR (10g Phablet)
	[MHz]	[dBm]	[mm]	[W/kg]	[mm]	[W/kg]	[mm]	[W/kg]
Bluetooth	2480	9.00	5	0.336	15	0.112	5	0.134

Note: Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

(*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for applicable exposure conditions was used for simultaneous transmission analysis.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 74 of 93	



12.3 Head SAR Simultaneous Transmission Analysis

Table 12-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	
Head SAR	Cell. CDMA/EVDO	0.342	0.808	1.150
	PCS CDMA/EVDO	0.797	0.808	See Table Below
	GSM 850	0.227	0.808	1.035
	GSM 1900	0.598	0.808	1.406
	UMTS 850	0.265	0.808	1.073
	UMTS 1900	0.697	0.808	1.505
	LTE Band 13	0.375	0.808	1.183
	LTE Band 5 (Cell)	0.335	0.808	1.143
	LTE Band 4 (AWS)	0.729	0.808	1.537
	LTE Band 2 (PCS)	0.905	0.808	See Table Below
	LTE Band 7	0.576	0.808	1.384

Simult Tx	Configuration	PCS CDMA SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	PCS EVDO SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Head SAR	Right Cheek	0.394	0.808	1.202	Head SAR	Right Cheek	0.371	0.808	1.179
	Right Tilt	0.226	0.562	0.788		Right Tilt	0.209	0.562	0.771
	Left Cheek	0.739	0.394	1.133		Left Cheek	0.797	0.394	1.191
	Left Tilt	0.348	0.808*	1.156		Left Tilt	0.320	0.808*	1.128

Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Right Cheek	0.477	0.808	1.285
	Right Tilt	0.278	0.562	0.840
	Left Cheek	0.905	0.394	1.299
	Left Tilt	0.332	0.808*	1.140



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 75 of 93	

**Table 12-3
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Cell. CDMA/EVDO	0.342	0.989	1.331
	PCS CDMA/EVDO	0.797	0.989	See Table Below
	GSM 850	0.227	0.989	1.216
	GSM 1900	0.598	0.989	1.587
	UMTS 850	0.265	0.989	1.254
	UMTS 1900	0.697	0.989	See Table Below
	LTE Band 13	0.375	0.989	1.364
	LTE Band 5 (Cell)	0.335	0.989	1.324
	LTE Band 4 (AWS)	0.729	0.989	See Table Below
	LTE Band 2 (PCS)	0.905	0.989	See Table Below
	LTE Band 7	0.576	0.989	1.565

Simult Tx	Configuration	PCS CDMA SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Head SAR	Right Cheek	0.394	0.855	1.249	N/A	Head SAR	Right Cheek	0.371	0.855	1.226	N/A
	Right Tilt	0.226	0.872	1.098	N/A		Right Tilt	0.209	0.872	1.081	N/A
	Left Cheek	0.739	0.989	See Note 1	0.03		Left Cheek	0.797	0.989	See Note 1	0.03
	Left Tilt	0.348	0.932	1.280	N/A		Left Tilt	0.320	0.932	1.252	N/A
Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Head SAR	Right Cheek	0.377	0.855	1.232	N/A	Head SAR	Right Cheek	0.349	0.855	1.204	N/A
	Right Tilt	0.228	0.872	1.100	N/A		Right Tilt	0.388	0.872	1.260	N/A
	Left Cheek	0.697	0.989	See Note 1	0.03		Left Cheek	0.729	0.989	See Note 1	0.03
	Left Tilt	0.333	0.932	1.265	N/A		Left Tilt	0.390	0.932	1.322	N/A

Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Head SAR	Right Cheek	0.477	0.855	1.332	N/A
	Right Tilt	0.278	0.872	1.150	N/A
	Left Cheek	0.905	0.989	See Note 1	0.03
	Left Tilt	0.332	0.932	1.264	N/A

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 76 of 93	



**Table 12-4
Simultaneous Transmission Scenario with Bluetooth (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	
Head SAR	Cell. CDMA/EVDO	0.342	0.336	0.678
	PCS CDMA/EVDO	0.797	0.336	1.133
	GSM 850	0.227	0.336	0.563
	GSM 1900	0.598	0.336	0.934
	UMTS 850	0.265	0.336	0.601
	UMTS 1900	0.697	0.336	1.033
	LTE Band 13	0.375	0.336	0.711
	LTE Band 5 (Cell)	0.335	0.336	0.671
	LTE Band 4 (AWS)	0.729	0.336	1.065
	LTE Band 2 (PCS)	0.905	0.336	1.241
	LTE Band 7	0.576	0.336	0.912

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

Notes:

1. No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 for 1g and not greater than 0.10 for 10g per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 77 of 93	

12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-5
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	Cell. CDMA	0.481	0.092	0.573
	PCS CDMA	0.793	0.092	0.885
	GSM 850	0.369	0.092	0.461
	GSM 1900	0.292	0.092	0.384
	UMTS 850	0.335	0.092	0.427
	UMTS 1900	0.577	0.092	0.669
	LTE Band 13	0.567	0.092	0.659
	LTE Band 5 (Cell)	0.468	0.092	0.560
	LTE Band 4 (AWS)	0.528	0.092	0.620
	LTE Band 2 (PCS)	0.808	0.092	0.900
	LTE Band 7	0.521	0.092	0.613

Table 12-6
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	Cell. CDMA	0.481	0.263	0.744
	PCS CDMA	0.793	0.263	1.056
	GSM 850	0.369	0.263	0.632
	GSM 1900	0.292	0.263	0.555
	UMTS 850	0.335	0.263	0.598
	UMTS 1900	0.577	0.263	0.840
	LTE Band 13	0.567	0.263	0.830
	LTE Band 5 (Cell)	0.468	0.263	0.731
	LTE Band 4 (AWS)	0.528	0.263	0.791
	LTE Band 2 (PCS)	0.808	0.263	1.071
	LTE Band 7	0.521	0.263	0.784





FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 78 of 93	

Table 12-7
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.5 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	Cell. CDMA	0.481	0.112	0.593
	PCS CDMA	0.793	0.112	0.905
	GSM 850	0.369	0.112	0.481
	GSM 1900	0.292	0.112	0.404
	UMTS 850	0.335	0.112	0.447
	UMTS 1900	0.577	0.112	0.689
	LTE Band 13	0.567	0.112	0.679
	LTE Band 5 (Cell)	0.468	0.112	0.580
	LTE Band 4 (AWS)	0.528	0.112	0.640
	LTE Band 2 (PCS)	0.808	0.112	0.920
	LTE Band 7	0.521	0.112	0.633

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 79 of 93	

12.5 Hotspot SAR Simultaneous Transmission Analysis



Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-“).

Table 12-8
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Cell. EVDO	0.495	0.186	0.681
	PCS EVDO	0.851	0.186	1.037
	GPRS 850	0.497	0.186	0.683
	GPRS 1900	0.778	0.186	0.964
	UMTS 850	0.387	0.186	0.573
	UMTS 1900	0.817	0.186	1.003
	LTE Band 13	0.615	0.186	0.801
	LTE Band 5 (Cell)	0.527	0.186	0.713
	LTE Band 4 (AWS)	0.705	0.186	0.891
	LTE Band 2 (PCS)	1.005	0.186	1.191
	LTE Band 7	0.906	0.186	1.092

Table 12-9
Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Cell. EVDO	0.495	0.455	0.950
	PCS EVDO	0.851	0.455	1.306
	GPRS 850	0.497	0.455	0.952
	GPRS 1900	0.778	0.455	1.233
	UMTS 850	0.387	0.455	0.842
	UMTS 1900	0.817	0.455	1.272
	LTE Band 13	0.615	0.455	1.070
	LTE Band 5 (Cell)	0.527	0.455	0.982
	LTE Band 4 (AWS)	0.705	0.455	1.160
	LTE Band 2 (PCS)	1.005	0.455	1.460
	LTE Band 7	0.906	0.455	1.361

FCC ID: A3LSMJ737V	 PCTEST PROFESSIONAL LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 80 of 93	

**Table 12-10
Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Cell. EVDO	0.495	0.168	0.663
	PCS EVDO	0.851	0.168	1.019
	GPRS 850	0.497	0.168	0.665
	GPRS 1900	0.778	0.168	0.946
	UMTS 850	0.387	0.168	0.555
	UMTS 1900	0.817	0.168	0.985
	LTE Band 13	0.615	0.168	0.783
	LTE Band 5 (Cell)	0.527	0.168	0.695
	LTE Band 4 (AWS)	0.705	0.168	0.873
	LTE Band 2 (PCS)	1.005	0.168	1.173
	LTE Band 7	0.906	0.168	1.074

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 81 of 93	

12.6 Phablet Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

(*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for applicable exposure conditions was used for simultaneous transmission analysis.

Table 12-11
Simultaneous Transmission Scenario with 5 GHz WLAN (Phablet)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	PCS EVDO	3.273	1.343	See Table Below
	UMTS 1900	2.324	1.343	3.667
	LTE Band 4 (AWS)	3.054	1.343	See Table Below
	LTE Band 2 (PCS)	3.252	1.343	See Table Below
	LTE Band 7	2.614	1.343	3.957

Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Phablet SAR	Back	3.107	1.244	See Note 1	0.07	Phablet SAR	Back	3.054	1.244	See Note 1	0.07
	Front	3.273	1.060	See Note 1	0.07		Front	2.924	1.060	3.984	N/A
	Top	-	1.343	1.343	N/A		Top	-	1.343	1.343	N/A
	Bottom	0.417	-	0.417	N/A		Bottom	0.580	-	0.580	N/A
	Right	0.070	1.343*	1.413	N/A		Right	0.234	1.343*	1.577	N/A
	Left	2.514	1.343*	3.857	N/A		Left	1.993	1.343*	3.336	N/A
Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR						
		1	2	1+2	1+2						
Phablet SAR	Back	3.252	1.244	See Note 1	0.07						
	Front	2.900	1.060	3.960	N/A						
	Top	-	1.343	1.343	N/A						
	Bottom	0.383	-	0.383	N/A						
	Right	0.095	1.343*	1.438	N/A						
	Left	2.412	1.343*	3.755	N/A						



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 82 of 93	

Table 12-12
Simultaneous Transmission Scenario with Bluetooth (Phablet)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	
Phablet SAR	PCS EVDO	3.273	0.134	3.407
	UMTS 1900	2.324	0.134	2.458
	LTE Band 4 (AWS)	3.054	0.134	3.188
	LTE Band 2 (PCS)	3.252	0.134	3.386
	LTE Band 7	2.614	0.134	2.748

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

Notes:

1. No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 for 1g and not greater than 0.10 for 10g per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.
2. For SAR summation, the highest reported SAR across all test distances was used as the most conservative evaluation for simultaneous transmission analysis for each device edge.



12.7 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g and 4 W/kg for 10g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is ≤ 0.04 for 1g and ≤ 0.10 for 10g, simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formulas for Head and Phablet, respectively.

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 83 of 93	

12.7.1 Left Cheek SPLSR Evaluation and Analysis


Table 12-13
Peak SAR Locations for Left Cheek



Mode/Band	x (mm)	y (mm)	z (mm)	Reported SAR (W/kg)
5 GHz WLAN	-5.43	310.89	-171.69	0.989
CDMA 1900	41.92	248.64	-172.07	0.739
EVDO 1900	43.20	251.21	-172.09	0.797
UMTS 1900	41.76	252.16	-172.07	0.697
LTE Band 4 (AWS)	46.23	252.99	-173.30	0.729
LTE Band 2 (PCS)	40.89	250.92	-172.40	0.905

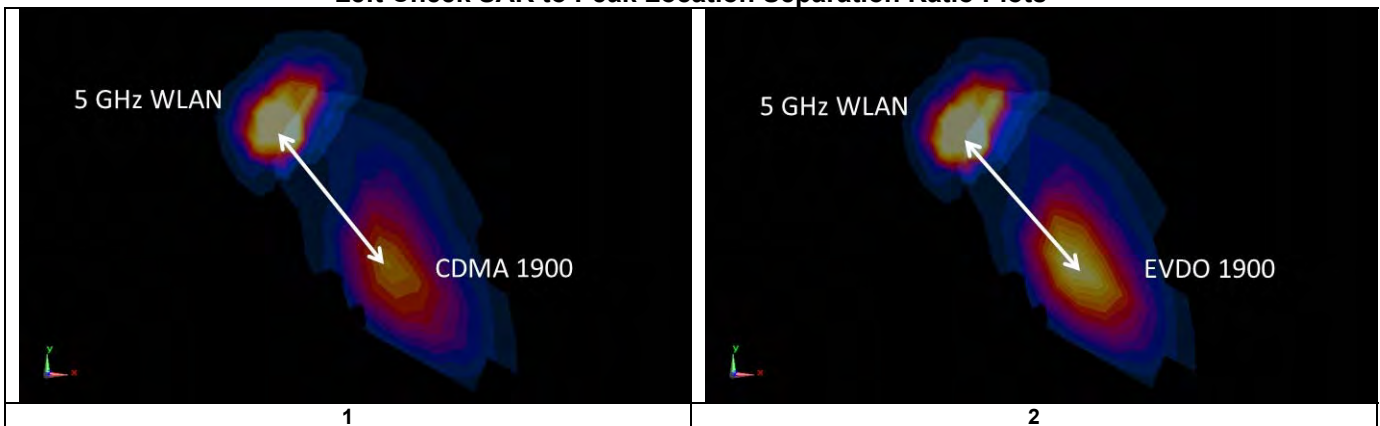
Table 12-14
Left Cheek SAR to Peak Location Separation Ratio Calculations



Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLSR Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	$(a+b)^{1.5}/D_{a-b}$	
5 GHz WLAN	CDMA 1900	0.989	0.739	1.728	78.21	0.03	1
5 GHz WLAN	EVDO 1900	0.989	0.797	1.786	76.99	0.03	2
5 GHz WLAN	UMTS 1900	0.989	0.697	1.686	75.34	0.03	3
5 GHz WLAN	LTE Band 4 (AWS)	0.989	0.729	1.718	77.61	0.03	4
5 GHz WLAN	LTE Band 2 (PCS)	0.989	0.905	1.894	75.78	0.03	5

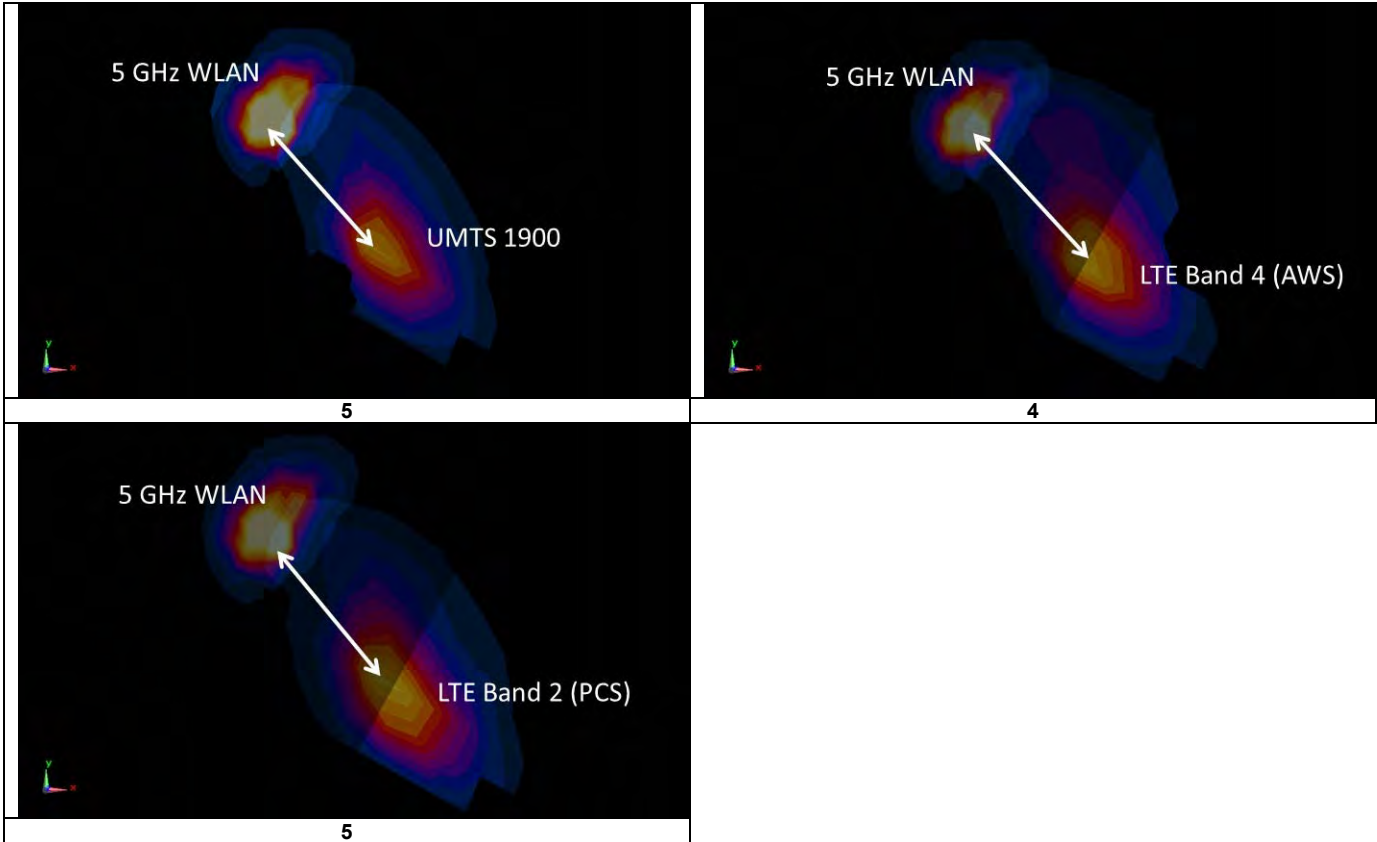Table 12-15
Left Cheek SAR to Peak Location Separation Ratio Plots



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 84 of 93	



FCC ID: A3LSMJ737V	 <small>PROTECTIONS LABORATORY, INC.</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 85 of 93	

12.7.2 Phablet Back Side SPLSR Evaluation and Analysis


Table 12-16
Peak SAR Locations for Phablet Back Side



Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
5 GHz WLAN	-16.00	69.00	1.244
EVDO 1900	-2.50	-61.50	3.107
LTE Band 4 (AWS)	-1.00	-55.50	3.054
LTE Band 2 (PCS)	-2.50	-65.00	3.252

Table 12-17
Phablet Back Side SAR to Peak Location Separation Ratio Calculations

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	$(a+b)^{1.5}/D_{a-b}$	
5 GHz WLAN	EVDO 1900	1.244	3.107	4.351	131.20	0.07	1
5 GHz WLAN	LTE Band 4 (AWS)	1.244	3.054	4.298	125.40	0.07	2
5 GHz WLAN	LTE Band 2 (PCS)	1.244	3.252	4.496	134.68	0.07	3

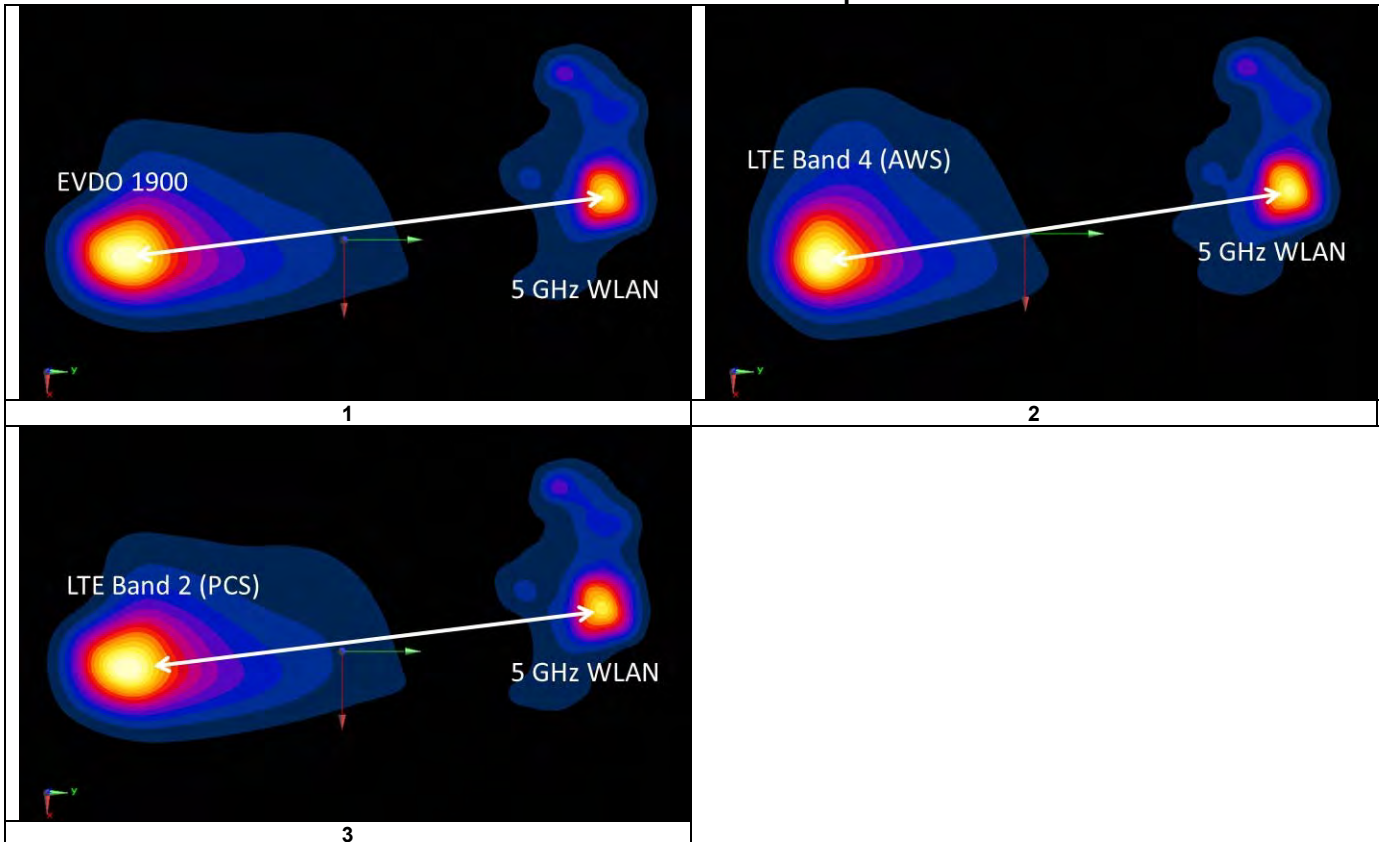Table 12-18
Phablet Back Side SAR to Peak Location Separation Ratio Plots



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 86 of 93

12.7.3 Phablet Front Side SPLSR Evaluation and Analysis


Table 12-19
Peak SAR Locations for Phablet Front Side

Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
5 GHz WLAN	-17.00	73.00	1.06
EVDO 1900	-50.50	-57.00	3.273

Table 12-20
Phablet Front Side SAR to Peak Location Separation Ratio Calculations



Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLSR Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$	
5 GHz WLAN	EVDO 1900	1.06	3.273	4.333	134.25	0.07	1

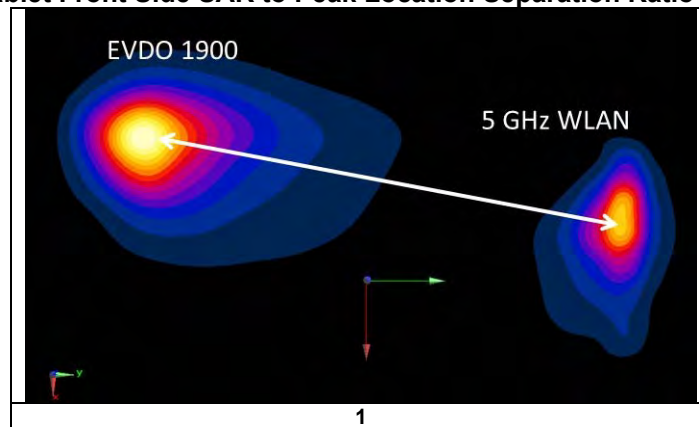Table 12-21
Phablet Front Side SAR to Peak Location Separation Ratio Plots



12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results and SPLSR analysis are sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528- 2013 Section 6.3.4.1.

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset		Page 87 of 93

13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:



- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

**Table 13-1
Phablet SAR Measurement Variability Results**

PHABLET VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (10g)	1st Repeated SAR (10g)	Ratio	2nd Repeated SAR (10g)	Ratio	3rd Repeated SAR (10g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1750	1732.50	20175	LTE Band 4 (AWS), 20 MHz Bandwidth	QPSK, 1 RB, 0 RB Offset	back	0 mm	2.420	2.270	1.07	N/A	N/A	N/A	N/A
1900	1851.25	25	PCS CDMA	EVDO Rev. 0	front	2 mm	2.700	2.760	1.02	N/A	N/A	N/A	N/A
2600	2560.00	21350	LTE Band 7, 20 MHz Bandwidth	QPSK, 1 RB, 99 RB Offset	back	0 mm	2.210	2.160	1.02	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams						

13.2 Measurement Uncertainty



The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 88 of 93	

14 EQUIPMENT LIST



Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8753E5	S-Parameter Vector Network Analyzer	8/17/2017	Annual	8/17/2018	MY40003841
Agilent	8753E5	S-Parameter Network Analyzer	2/8/2018	Annual	2/8/2019	US39170122
Agilent	E4438C	ESG Vector Signal Generator	3/24/2017	Biennial	3/24/2019	MY42082385
Agilent	E5515C	Wireless Communications Test Set	5/31/2017	Annual	5/31/2018	GB43304278
Agilent	E5515C	8960 Series 10 Wireless Communications Test Set	11/15/2017	Annual	11/15/2018	GB42230325
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB44450273
Agilent	N5182A	MXG Vector Signal Generator	1/24/2018	Annual	1/24/2019	MY47420651
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433978
Anritsu	MA24106A	USB Power Sensor	3/12/2018	Annual	3/12/2019	1349501
Anritsu	MA24106A	USB Power Sensor	3/12/2018	Annual	3/12/2019	1344557
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1339018
Anritsu	ML2496A	Power Meter	4/20/2017	Annual	4/20/2018	1306009
Anritsu	MT8821C	Radio Communication Analyzer	11/17/2017	Annual	11/17/2018	6201381794
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4040	Therm./ Clock/ Humidity Monitor	1/8/2018	Annual	1/8/2019	160574418
Control Company	4352	Ultra Long Stem Thermometer	1/8/2018	Annual	1/8/2019	160508122
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5m	6/1/2017	Annual	6/1/2018	MY53401181
MCL	BW-N6W5+	6dB Attenuator	N/A	N/A	N/A	1139
Mini Circuits	PWR-4GHS	USB Power Sensor	1/20/2018	Annual	1/20/2019	11710030063
Mini Circuits	PWR-4GHS	USB Power Sensor	1/22/2018	Annual	1/22/2019	11710030062
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Narda	BW-53W2	Attenuator (3dB)	CBT	N/A	CBT	120
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	4/11/2017	Annual	4/11/2018	836371/0079
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	7/20/2017	Annual	7/20/2018	132885
Rohde & Schwarz	CMW500	Radio Communication Tester	11/3/2017	Annual	11/3/2018	100976
Seekonk	NC-100	Torque Wrench (8" lb)	9/1/2016	Biennial	9/1/2018	21053
SPEAG	DAK-12	Dielectric Assessment Kit (10MHz - 3GHz)	3/13/2018	Annual	3/13/2019	1102
SPEAG	DAK-3.5	Dielectric Assessment Kit	9/12/2017	Annual	9/12/2018	1091
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	7/11/2017	Annual	7/11/2018	1099
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	8/8/2017	Annual	8/8/2018	1041
SPEAG	D750V3	750 MHz SAR Dipole	7/13/2016	Biennial	7/13/2018	1161
SPEAG	D835V2	835 MHz SAR Dipole	1/15/2018	Annual	1/15/2019	4d132
SPEAG	D1750V2	1750 MHz SAR Dipole	5/9/2017	Annual	5/9/2018	1148
SPEAG	D1900V2	1900 MHz SAR Dipole	7/8/2016	Biennial	7/8/2018	5d080
SPEAG	D2450V2	2450 MHz SAR Dipole	9/11/2017	Annual	9/11/2018	797
SPEAG	D2600V2	2600 MHz SAR Dipole	7/10/2017	Annual	7/10/2018	1126
SPEAG	D5GHzv2	5 GHz SAR Dipole	2/12/2018	Annual	2/12/2019	1120
SPEAG	D1750V2	1750 MHz SAR Dipole	7/14/2016	Biennial	7/14/2018	1150
SPEAG	D1900V2	1900 MHz SAR Dipole	2/7/2018	Annual	2/7/2019	5d148
SPEAG	D5GHzv2	5 GHz SAR Dipole	8/15/2017	Annual	8/15/2018	1237
SPEAG	EX3DV4	SAR Probe	7/17/2017	Annual	7/17/2018	7410
SPEAG	ES3DV3	SAR Probe	2/13/2018	Annual	2/13/2019	3213
SPEAG	ES3DV3	SAR Probe	8/14/2017	Annual	8/14/2018	3332
SPEAG	EX3DV4	SAR Probe	1/16/2018	Annual	1/16/2019	3589
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287
SPEAG	EX3DV4	SAR Probe	4/18/2017	Annual	4/18/2018	7406
SPEAG	EX3DV4	SAR Probe	2/14/2018	Annual	2/14/2019	3914
SPEAG	ES3DV3	SAR Probe	3/13/2018	Annual	3/13/2019	3319
SPEAG	EX3DV4	SAR Probe	8/16/2017	Annual	8/16/2018	7308
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/13/2017	Annual	7/13/2018	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/9/2018	Annual	2/9/2019	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/9/2017	Annual	8/9/2018	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/21/2017	Annual	6/21/2018	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/11/2017	Annual	4/11/2018	1407
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/15/2018	Annual	2/15/2019	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/7/2018	Annual	3/7/2019	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/14/2017	Annual	6/14/2018	1334

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 89 of 93	

15 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS					11.5	11.3	60
Expanded Uncertainty (95% CONFIDENCELEVEL)	k=2					23.0	22.6	



FCC ID: A3LSMJ737V		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 90 of 93	

16 CONCLUSION

16.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 91 of 93	

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: A3LSMJ737V	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 92 of 93	

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMJ737V	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1803120038-01-R1.A3L	Test Dates: 03/18/18 - 04/05/18	DUT Type: Portable Handset	Page 93 of 93

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

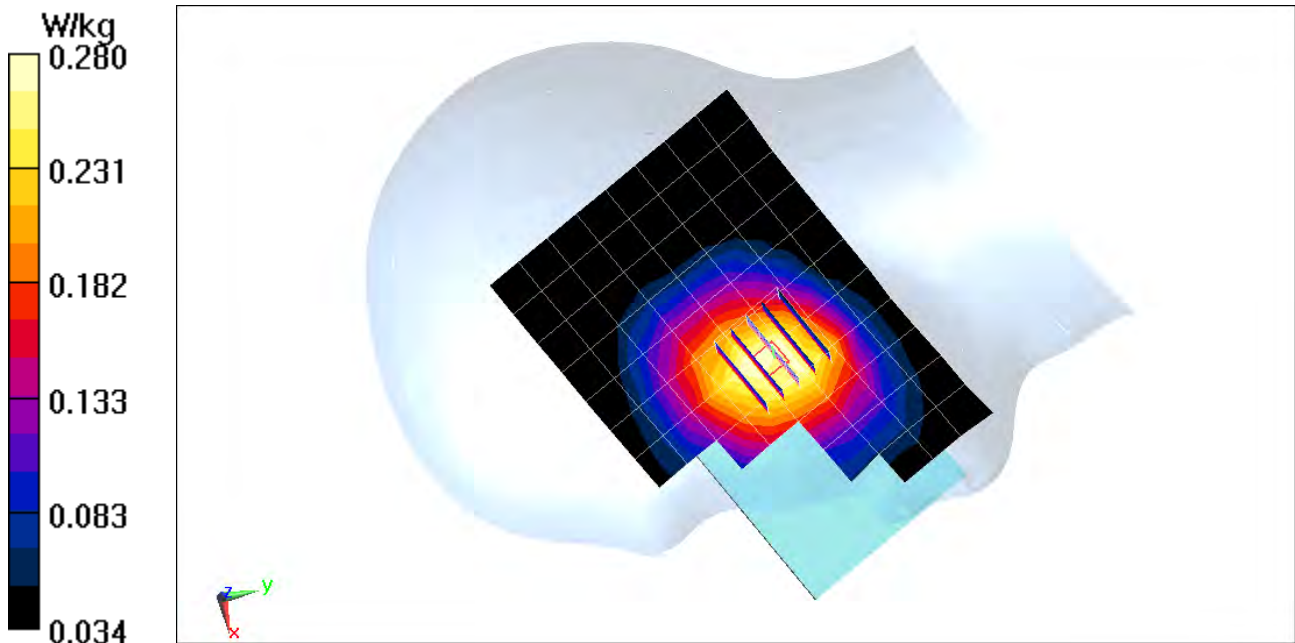
Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Head Medium parameters used (interpolated):
 $f = 836.52$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.006$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Test Date: 03-25-2018; Ambient Temp: 23.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: Cell. CDMA, Rule Part 22H, Right Head, Cheek, Mid.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.75 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.322 W/kg
SAR(1 g) = 0.257 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13655

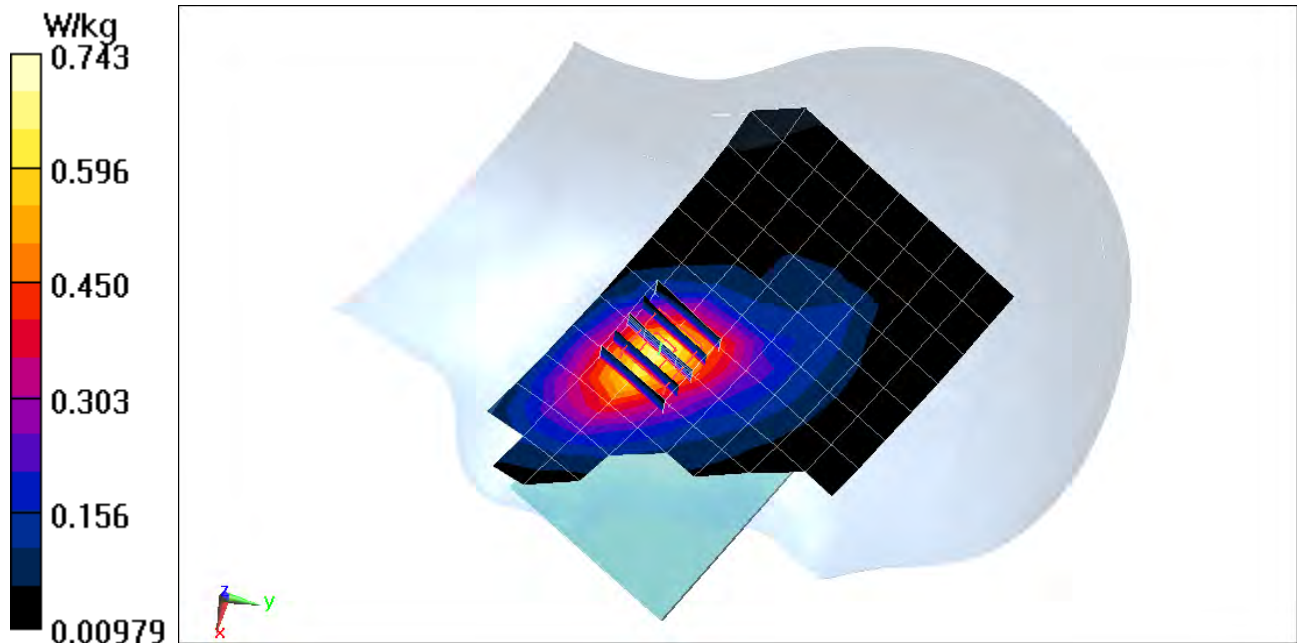
Communication System: UID 0, PCS CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium: 1900 Head Medium parameters used (interpolated):
 $f = 1908.75 \text{ MHz}$; $\sigma = 1.439 \text{ S/m}$; $\epsilon_r = 39.901$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 04-05-2018; Ambient Temp: 22.2°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3332; ConvF(5.33, 5.33, 5.33); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: PCS EVDO Rev A, Left Head, Cheek, High.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 22.33 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.979 W/kg
SAR(1 g) = 0.636 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

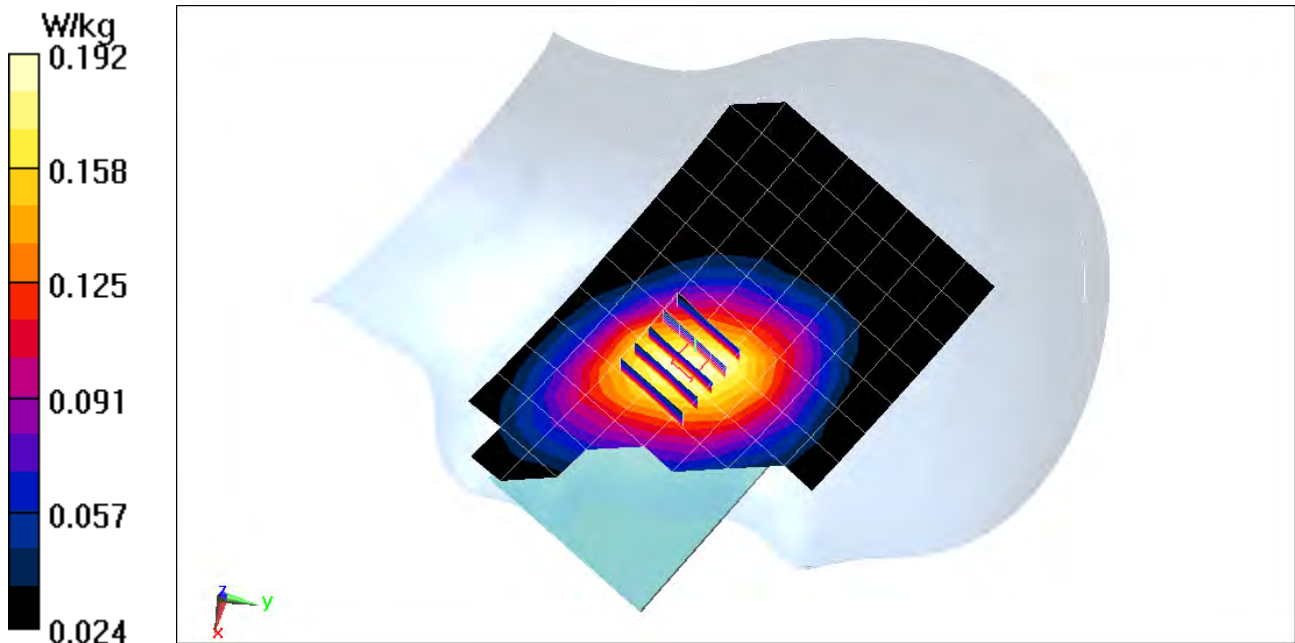
Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Head Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.901 \text{ S/m}$; $\epsilon_r = 41.005$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 03-25-2018; Ambient Temp: 23.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GSM 850, Left Head, Cheek, Mid.ch

Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.43 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.224 W/kg
SAR(1 g) = 0.177 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

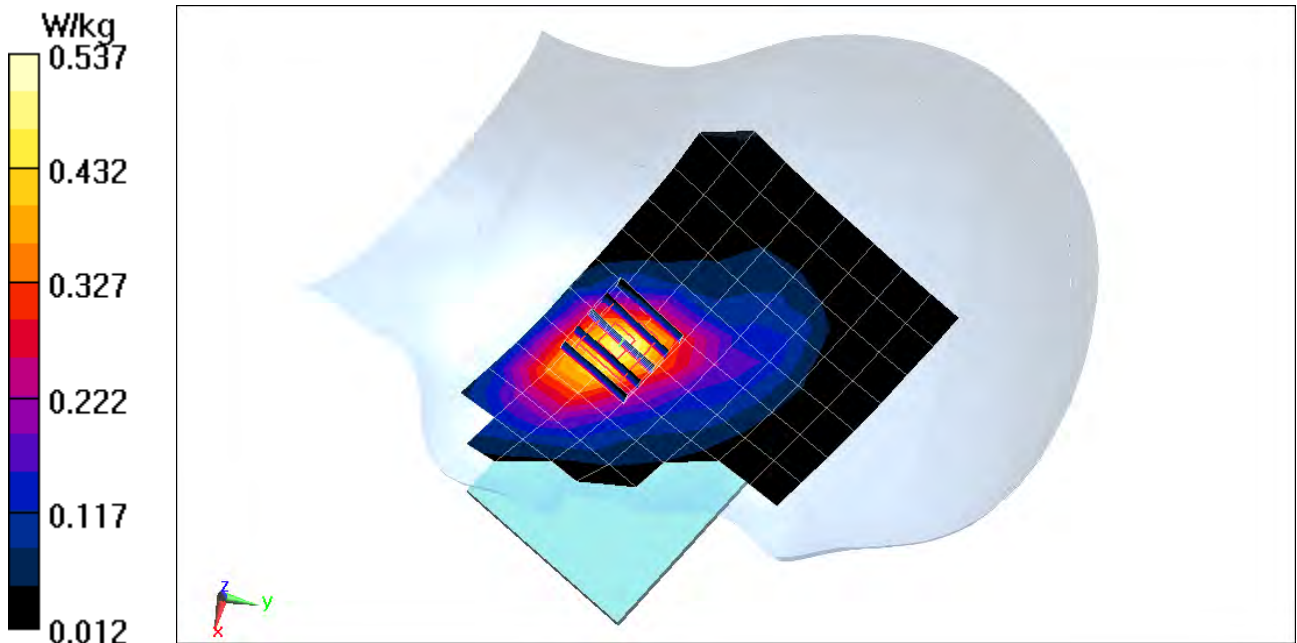
Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: 1900 Head Medium parameters used:
 $f = 1880 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 39.254$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 04-02-2018; Ambient Temp: 22.9°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3332; ConvF(5.33, 5.33, 5.33); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GSM 1900, Left Head, Cheek, Mid.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.19 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.714 W/kg
SAR(1 g) = 0.458 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13291

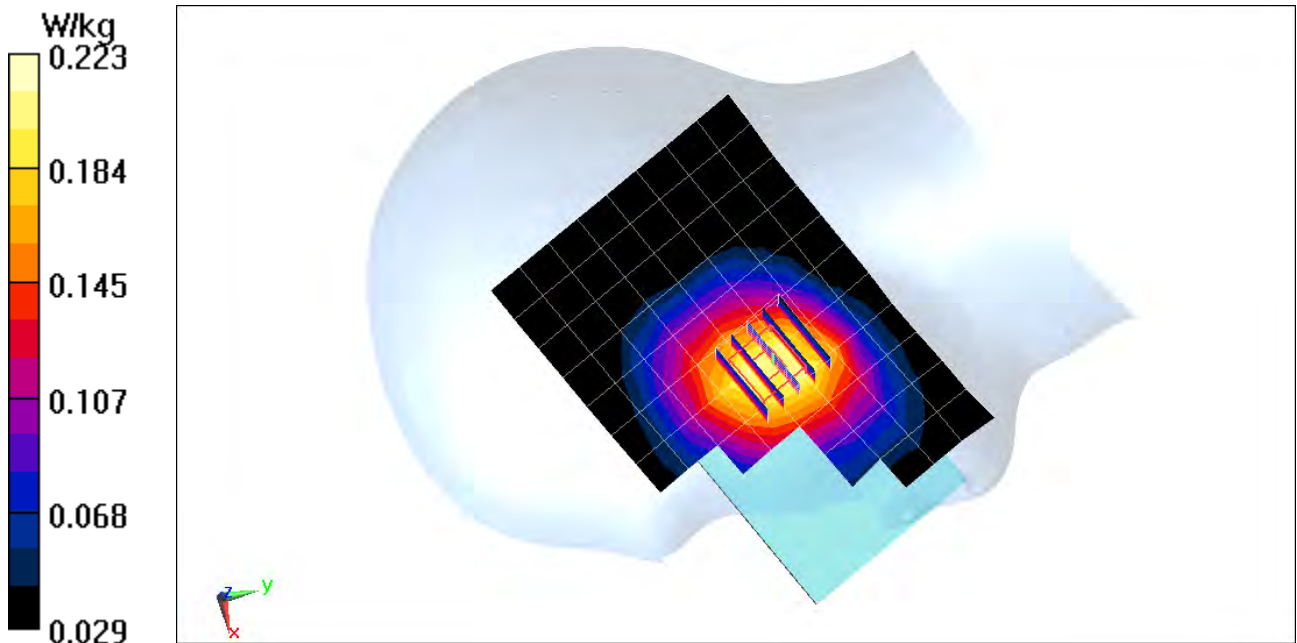
Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Head Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.901 \text{ S/m}$; $\epsilon_r = 41.005$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

Test Date: 03-25-2018; Ambient Temp: 23.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 850, Right Head, Cheek, Mid.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.57 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.255 W/kg
SAR(1 g) = 0.205 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13655

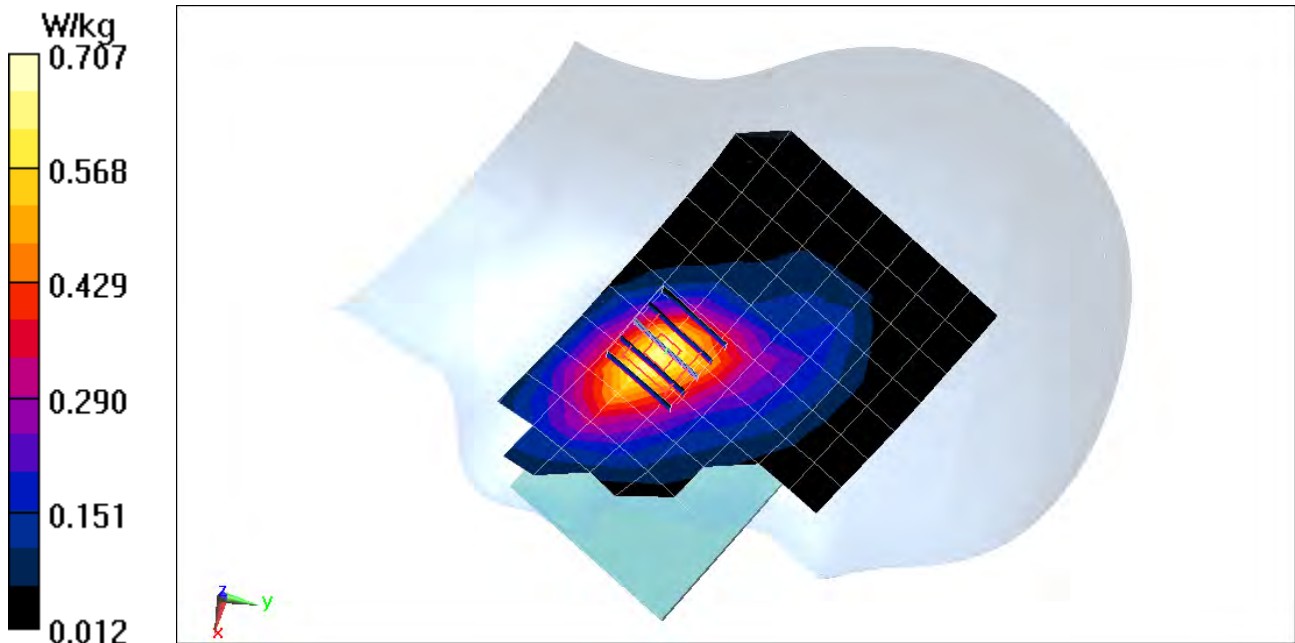
Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Head Medium parameters used:
 $f = 1880 \text{ MHz}$; $\sigma = 1.407 \text{ S/m}$; $\epsilon_r = 40.025$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 04-05-2018; Ambient Temp: 22.2°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3332; ConvF(5.33, 5.33, 5.33); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900, Left Head, Cheek, Mid.ch

Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 21.89 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.918 W/kg
SAR(1 g) = 0.603 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

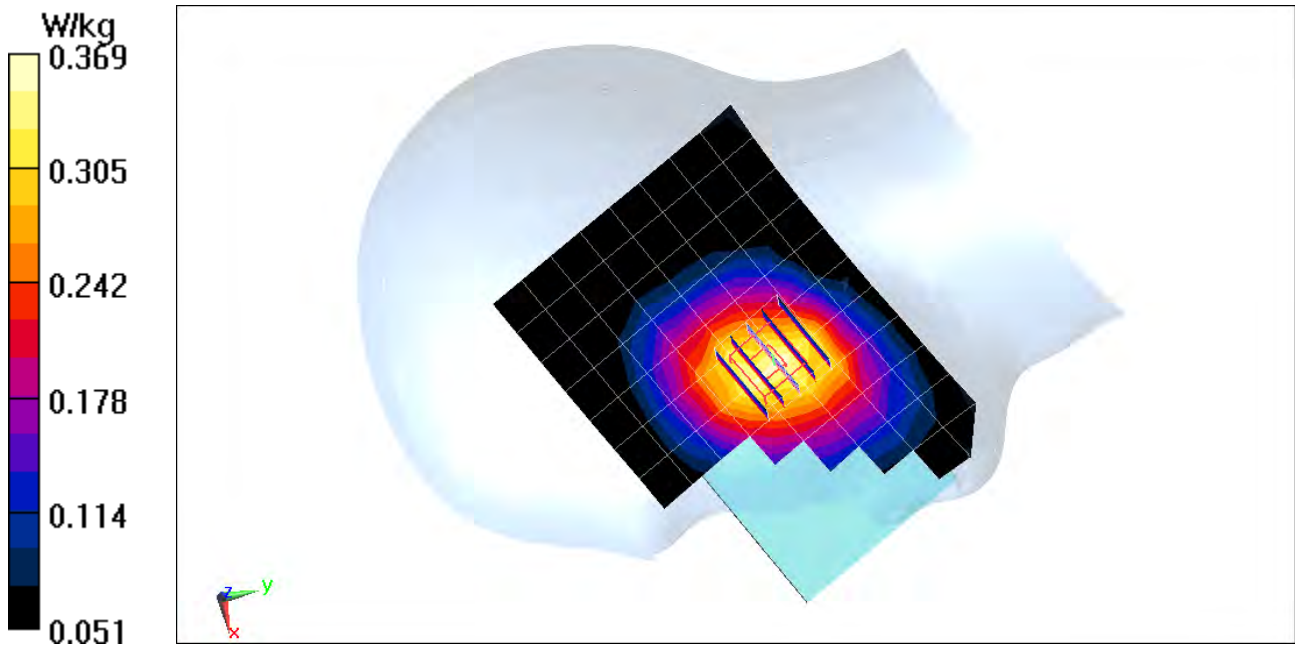
Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: 750 Head Medium parameters used (interpolated):
 $f = 782 \text{ MHz}$; $\sigma = 0.937 \text{ S/m}$; $\epsilon_r = 42.08$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

Test Date: 03-30-2018; Ambient Temp: 23.8°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7410; ConvF(10.6, 10.6, 10.6); Calibrated: 7/17/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1322; Calibrated: 7/13/2017
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.37 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.391 W/kg
SAR(1 g) = 0.315 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13291

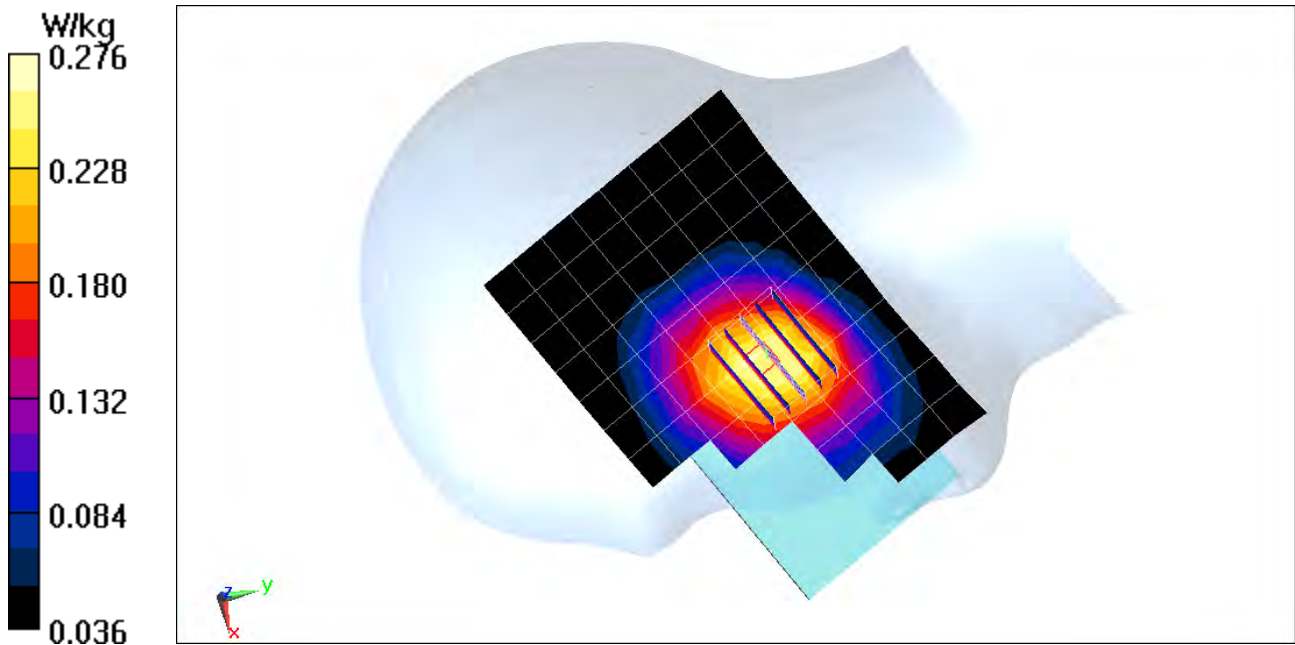
Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: 835 Head Medium parameters used (interpolated):
 $f = 836.5 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 41.006$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

Test Date: 03-25-2018; Ambient Temp: 23.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018
Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 5 (Cell.), Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.07 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.323 W/kg
SAR(1 g) = 0.255 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

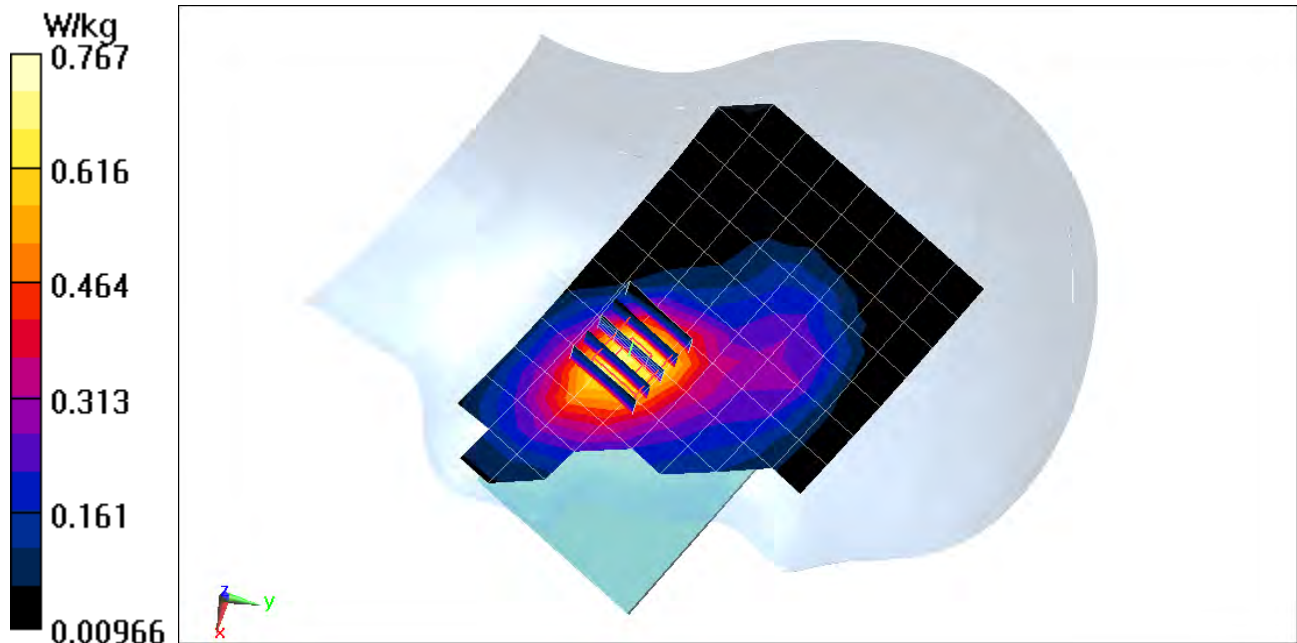
Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: 1750 Head Medium parameters used (interpolated):
 $f = 1732.5$ MHz; $\sigma = 1.377$ S/m; $\epsilon_r = 39.553$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Test Date: 03-20-2018; Ambient Temp: 22.8°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(8.66, 8.66, 8.66); Calibrated: 7/17/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1322; Calibrated: 7/13/2017
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 4 (AWS), Left Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 22.31 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.865 W/kg
SAR(1 g) = 0.579 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13655

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.377 \text{ S/m}$; $\epsilon_r = 39.254$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04-02-2018; Ambient Temp: 22.9°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3332; ConvF(5.33, 5.33, 5.33); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 2 (PCS), Left Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

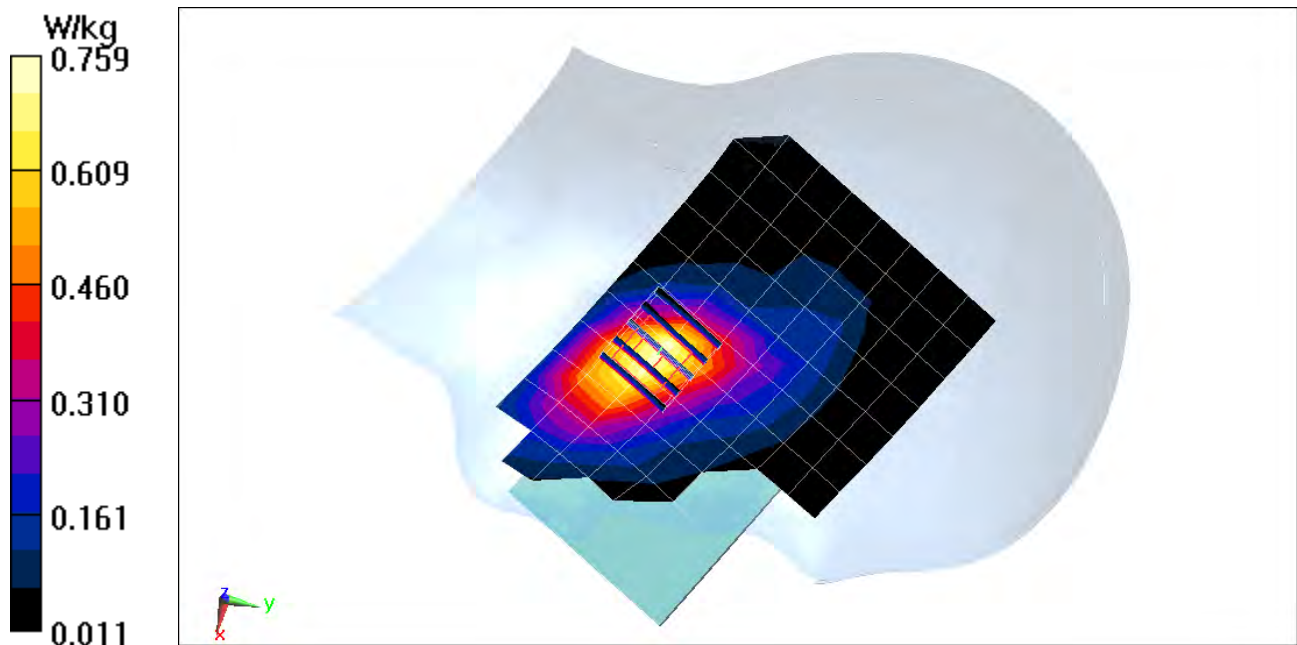
Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.25 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.663 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

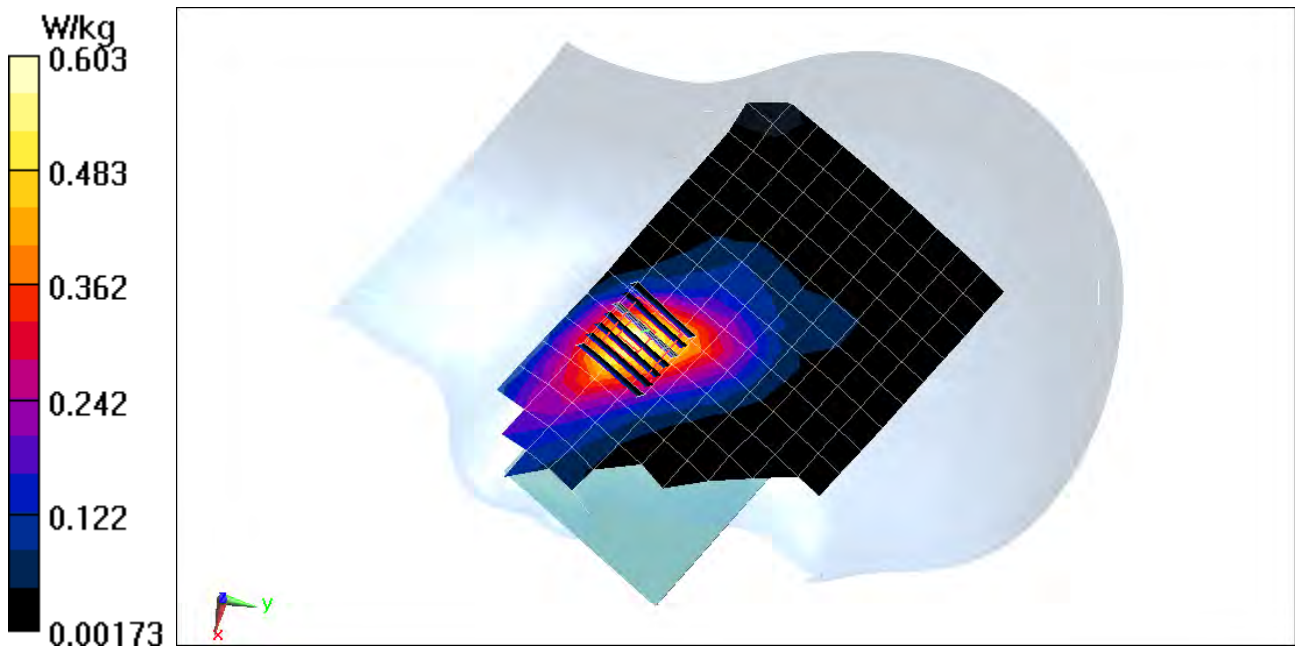
Communication System: UID 0, _LTE Band 7; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: 2600 Head Medium parameters used (interpolated):
 $f = 2560 \text{ MHz}$; $\sigma = 1.981 \text{ S/m}$; $\epsilon_r = 39.565$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 03-18-2018; Ambient Temp: 21.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(4.56, 4.56, 4.56); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Front; Type: SAM; Serial: 1686
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 7, Left Head, Cheek, High.ch, QPSK,
20 MHz Bandwidth, 1 RB, 99 RB Offset**

Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 17.83 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.916 W/kg
SAR(1 g) = 0.487 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 34016

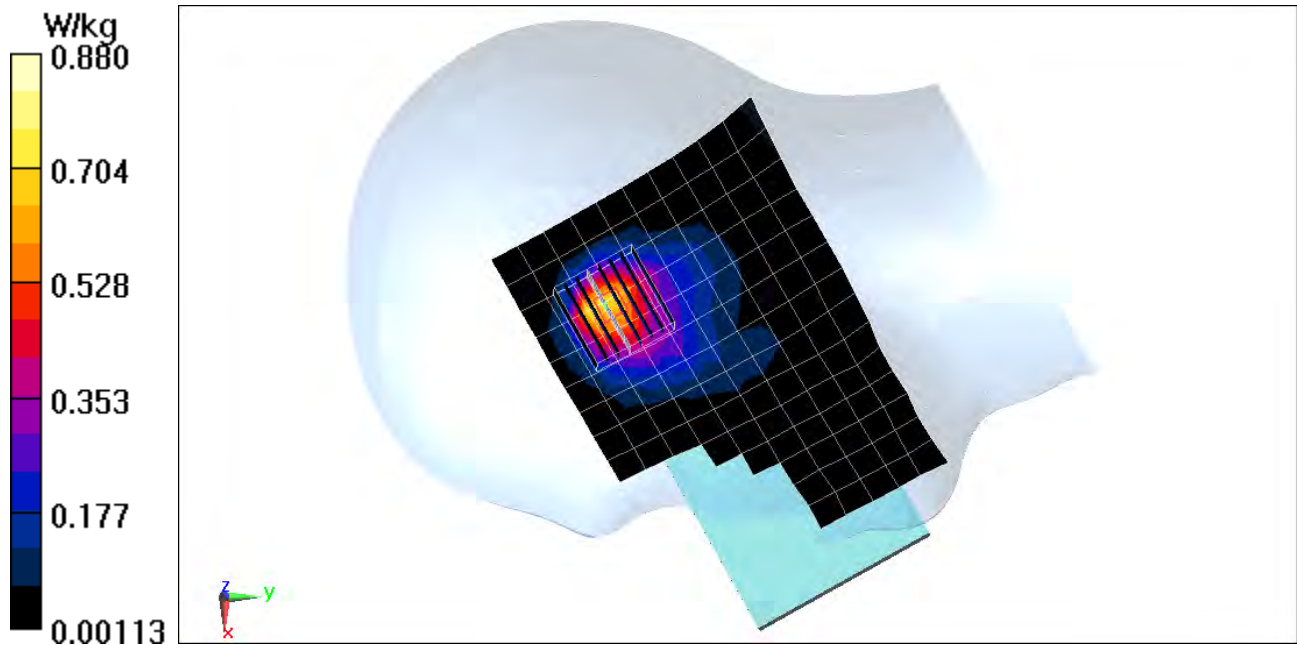
Communication System: UID 0, _IEEE 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: 2450 Head Medium parameters used (interpolated):
 $f = 2462 \text{ MHz}$; $\sigma = 1.854 \text{ S/m}$; $\epsilon_r = 40.083$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

Test Date: 03-30-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(4.68, 4.68, 4.68); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Front; Type: SAM; Serial: 1686
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b, 22 MHz Bandwidth,
Right Head, Cheek, Ch 11, 1 Mbps**

Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 11.78 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 1.47 W/kg
SAR(1 g) = 0.677 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 34016

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5510 MHz; Duty Cycle: 1:1
Medium: 5GHz Head Medium parameters used (interpolated):
 $f = 5510 \text{ MHz}$; $\sigma = 4.914 \text{ S/m}$; $\epsilon_r = 37.117$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

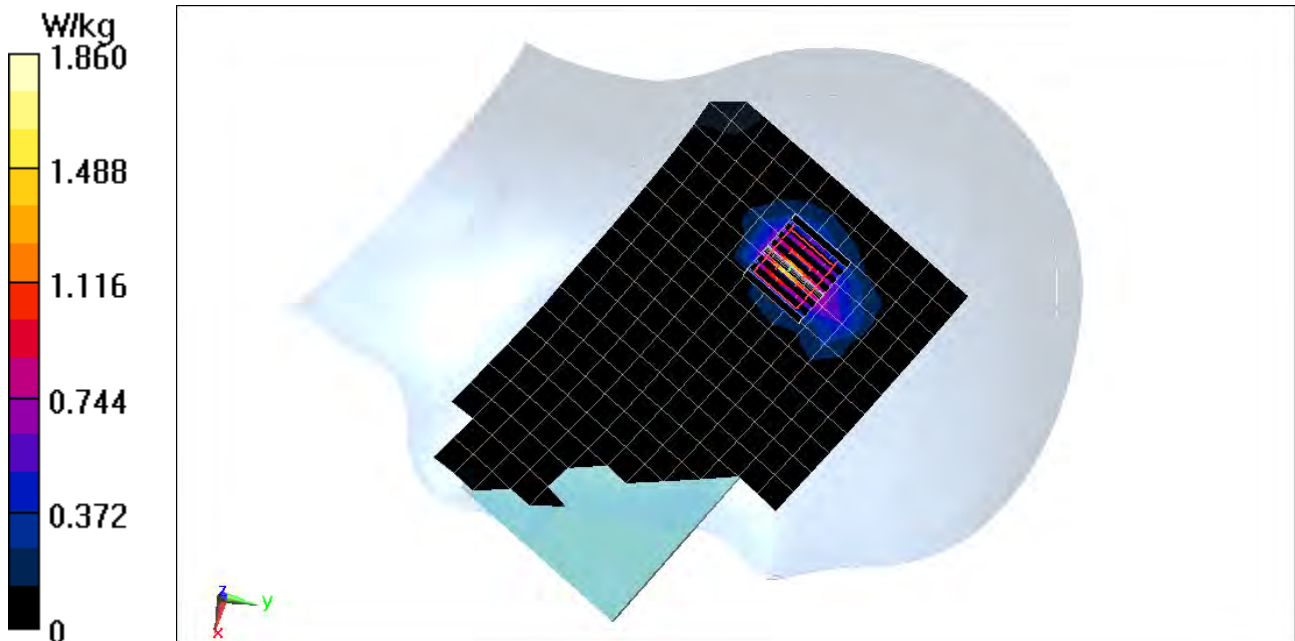
Test Date: 03-26-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(4.17, 4.17, 4.17); Calibrated: 1/16/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1322; Calibrated: 7/13/2017
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11n, U-NII-2C, 40 MHz Bandwidth,
Left Head, Cheek, Ch 102, 13.5 Mbps**

Area Scan (13x22x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4
Reference Value = 10.71 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 2.96 W/kg
SAR(1 g) = 0.771 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.52 \text{ MHz}$; $\sigma = 0.959 \text{ S/m}$; $\epsilon_r = 52.837$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-22-2018; Ambient Temp: 21.3°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: Cell. CDMA, Body SAR, Back side, Mid.ch

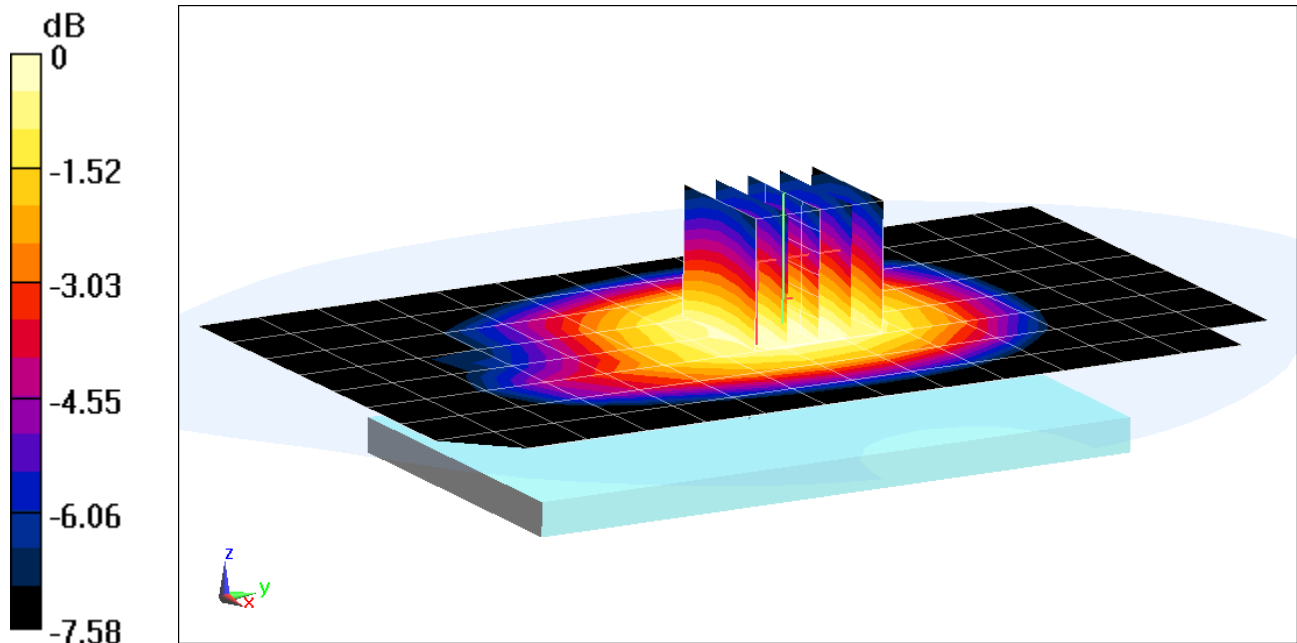
Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.13 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.457 W/kg

SAR(1 g) = 0.363 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.52 \text{ MHz}$; $\sigma = 0.959 \text{ S/m}$; $\epsilon_r = 52.837$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-22-2018; Ambient Temp: 21.3°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: Cell. EVDO, Body SAR, Back side, Mid.ch

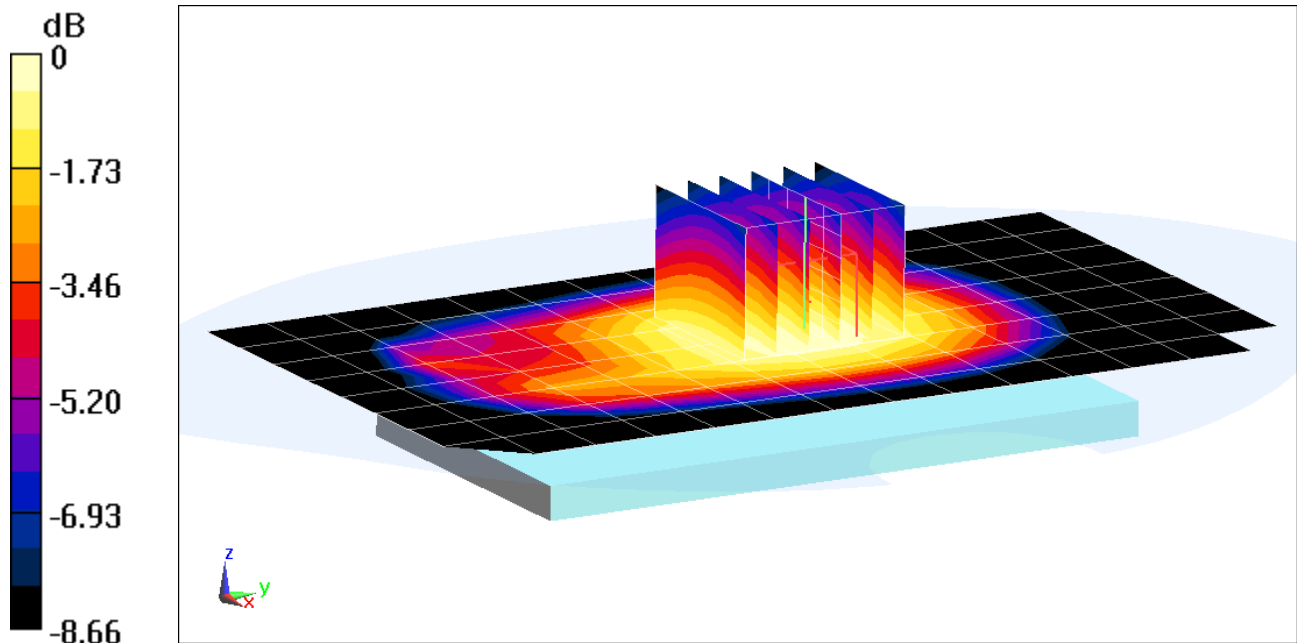
Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.09 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.367 W/kg



0 dB = 0.400 W/kg = -3.98 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13291

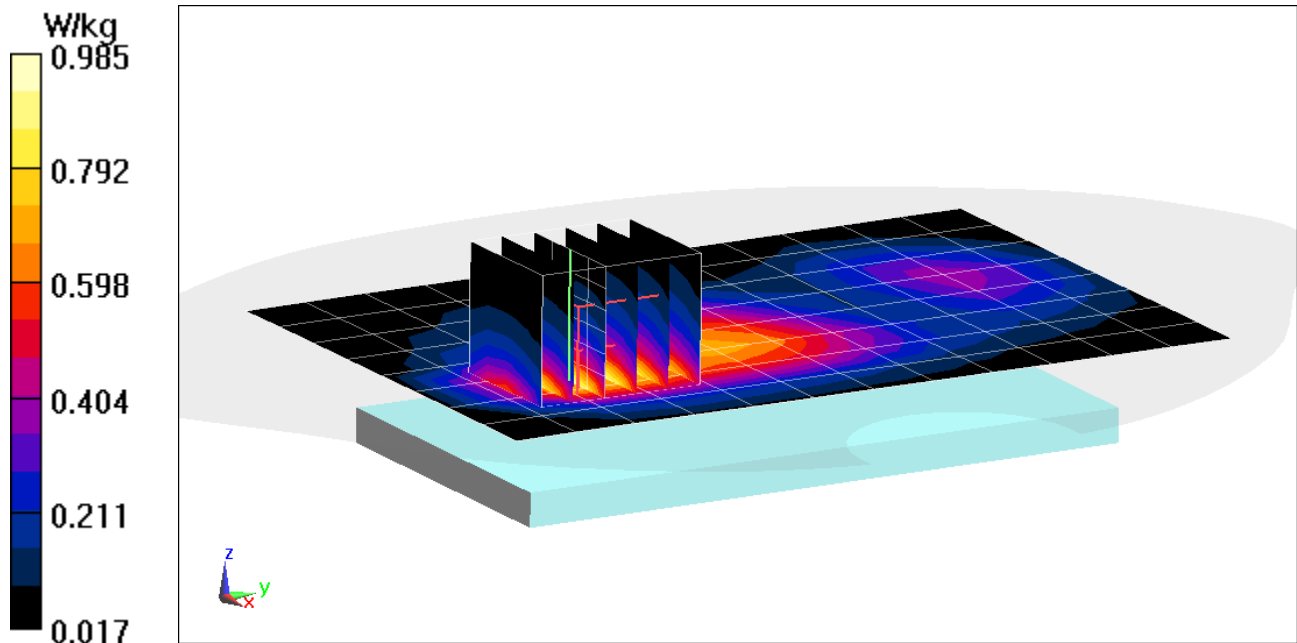
Communication System: UID 0, CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used (interpolated):
 $f = 1908.75$ MHz; $\sigma = 1.589$ S/m; $\epsilon_r = 52.938$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-26-2018; Ambient Temp: 22.1°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn665; Calibrated: 2/15/2018
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: PCS CDMA, Body SAR, Back side, High.ch

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.57 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.17 W/kg
SAR(1 g) = 0.689 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13655

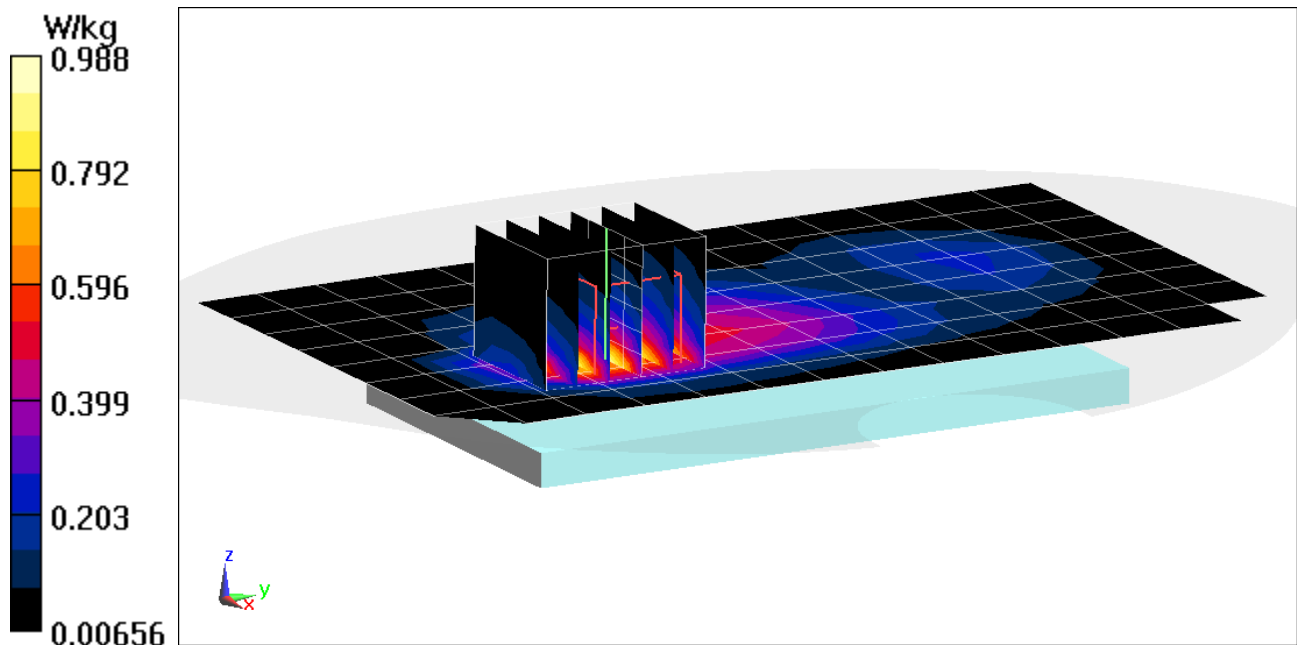
Communication System: UID 0, CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used (interpolated):
 $f = 1908.75 \text{ MHz}$; $\sigma = 1.589 \text{ S/m}$; $\epsilon_r = 52.938$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-26-2018; Ambient Temp: 22.1°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn665; Calibrated: 2/15/2018
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: PCS EVDO, Body SAR, Back side, High.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.61 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.22 W/kg
SAR(1 g) = 0.674 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13291

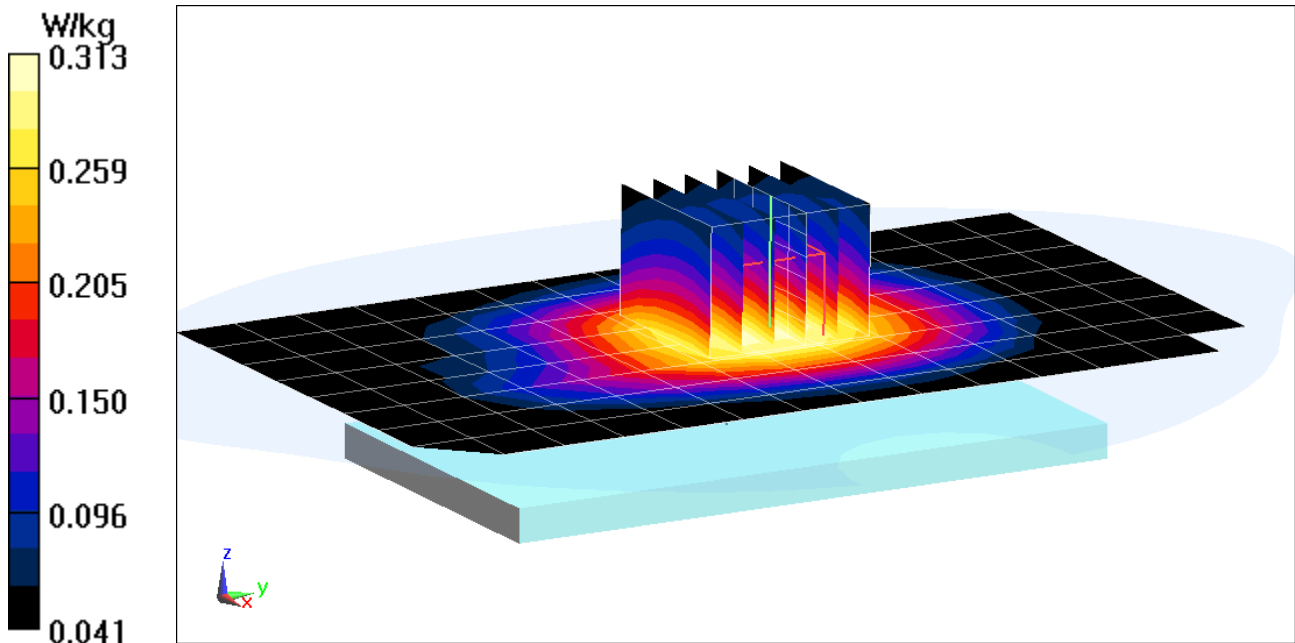
Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.6$ MHz; $\sigma = 0.959$ S/m; $\epsilon_r = 52.836$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-22-2018; Ambient Temp: 21.3°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018
Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GSM 850, Body SAR, Back side, Mid.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.73 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.357 W/kg
SAR(1 g) = 0.288 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13291

Communication System: UID 0, _GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.076
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.959 \text{ S/m}$; $\epsilon_r = 52.836$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-22-2018; Ambient Temp: 21.3°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 850, Body SAR, Back side, Mid.ch, 4 Tx Slots

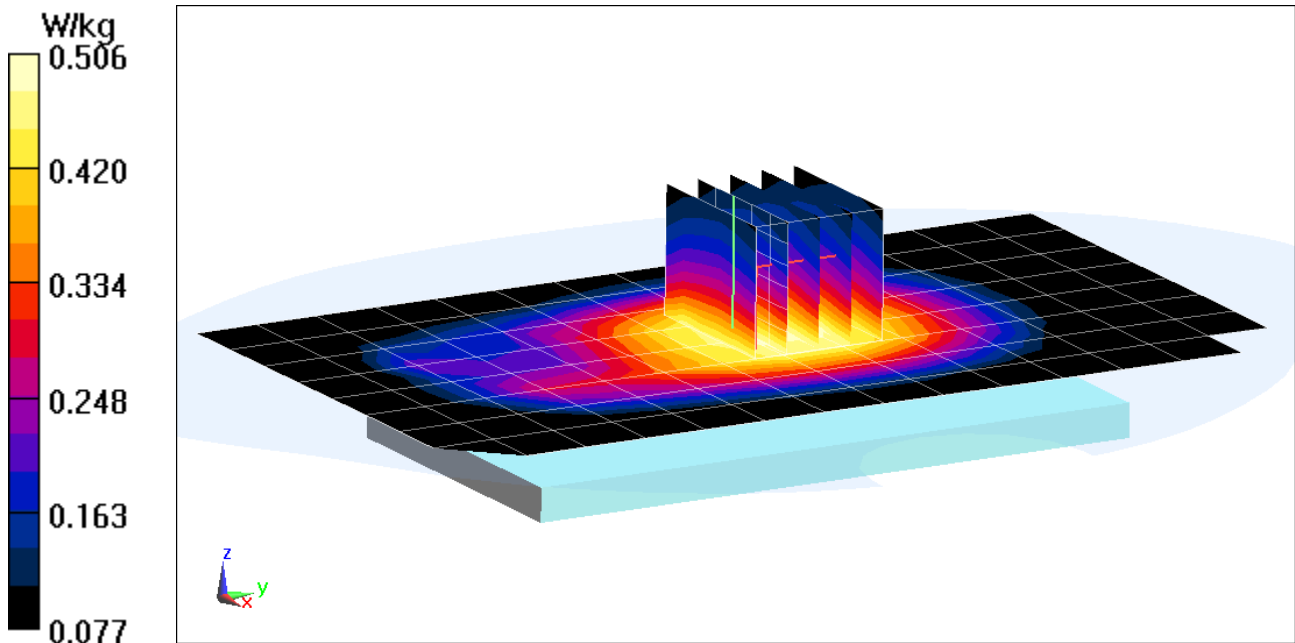
Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.50 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.460 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

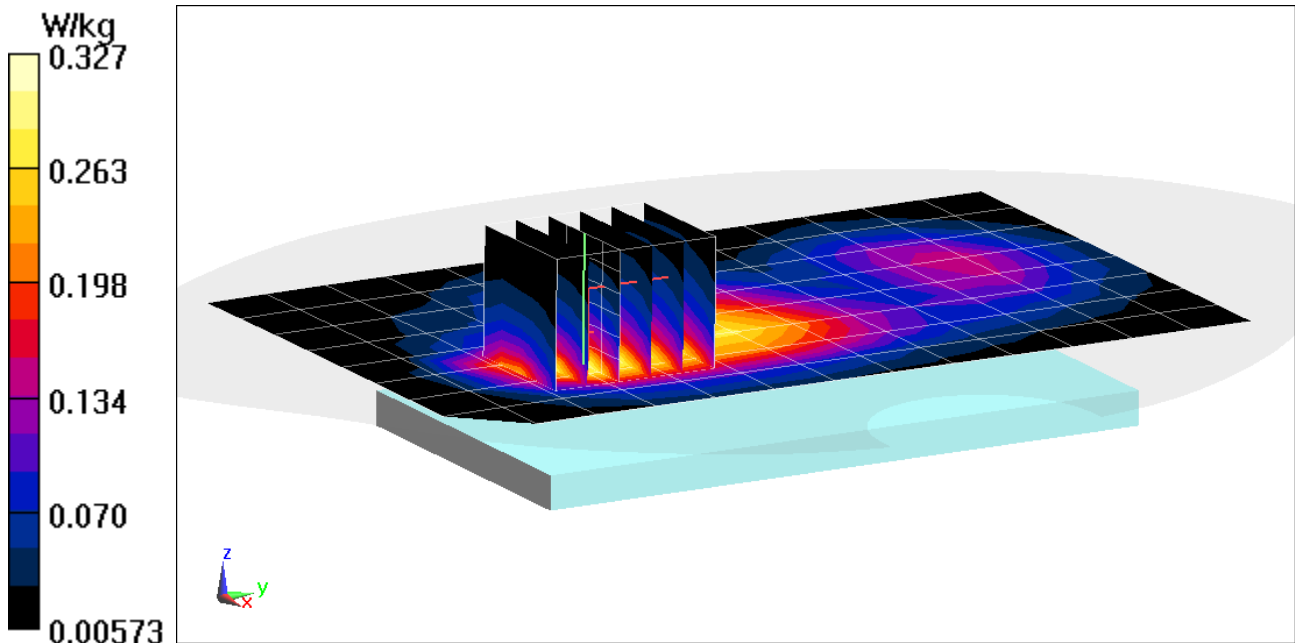
Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium: 1900 Body Medium parameters used:
 $f = 1880 \text{ MHz}$; $\sigma = 1.553 \text{ S/m}$; $\epsilon_r = 53.605$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-30-2018; Ambient Temp: 22.9°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn665; Calibrated: 2/15/2018
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GSM 1900, Body SAR, Back side, Mid.ch

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.65 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.388 W/kg
SAR(1 g) = 0.230 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body Medium parameters used:

$f = 1910 \text{ MHz}$; $\sigma = 1.592 \text{ S/m}$; $\epsilon_r = 53.49$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-30-2018; Ambient Temp: 22.9°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: GPRS 1900, Body SAR, Back side, High.ch, 3 Tx Slots

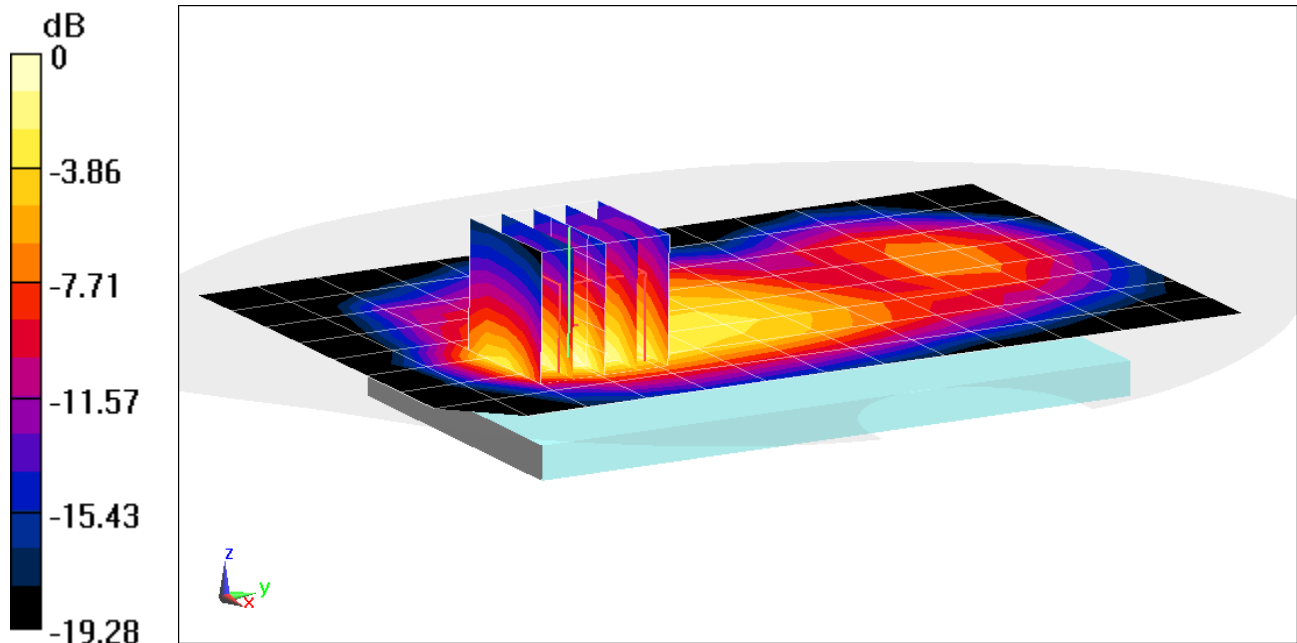
Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.30 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.676 W/kg



0 dB = 1.01 W/kg = 0.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

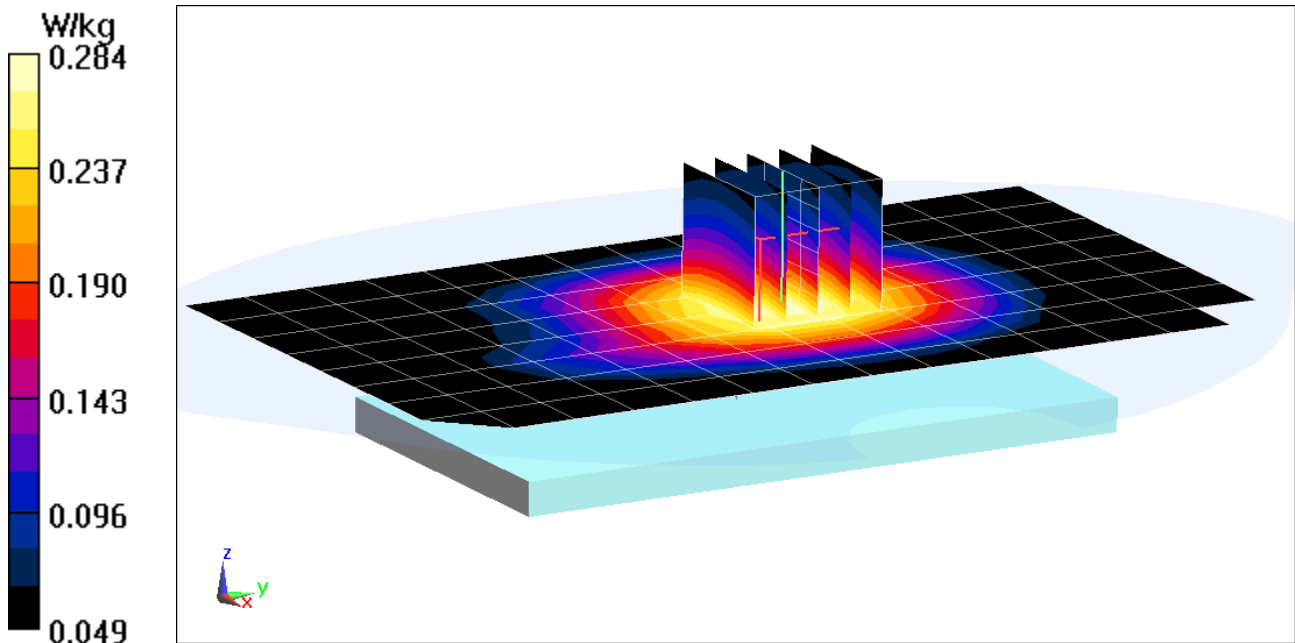
Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.959 \text{ S/m}$; $\epsilon_r = 52.836$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-22-2018; Ambient Temp: 21.3°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018
Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 850, Body SAR, Back side, Mid.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.00 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.325 W/kg
SAR(1 g) = 0.259 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

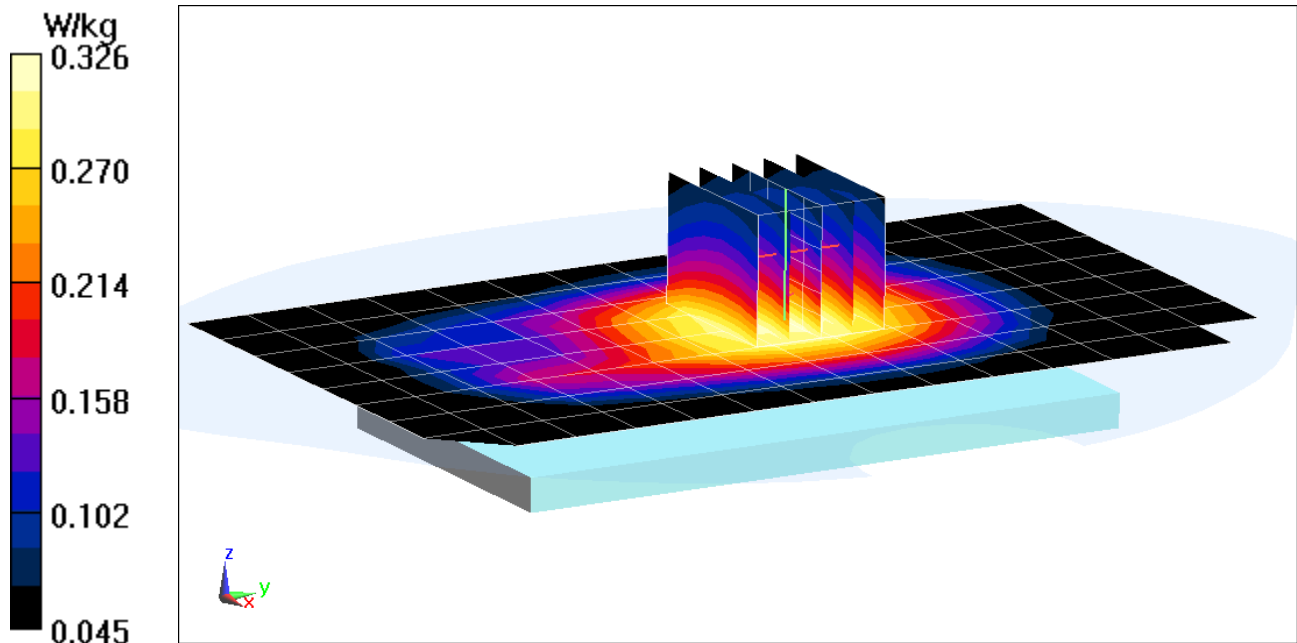
Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.959 \text{ S/m}$; $\epsilon_r = 52.836$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-22-2018; Ambient Temp: 21.3°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1272; Calibrated: 2/9/2018
Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 850, Body SAR, Back side, Mid.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.23 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.372 W/kg
SAR(1 g) = 0.299 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

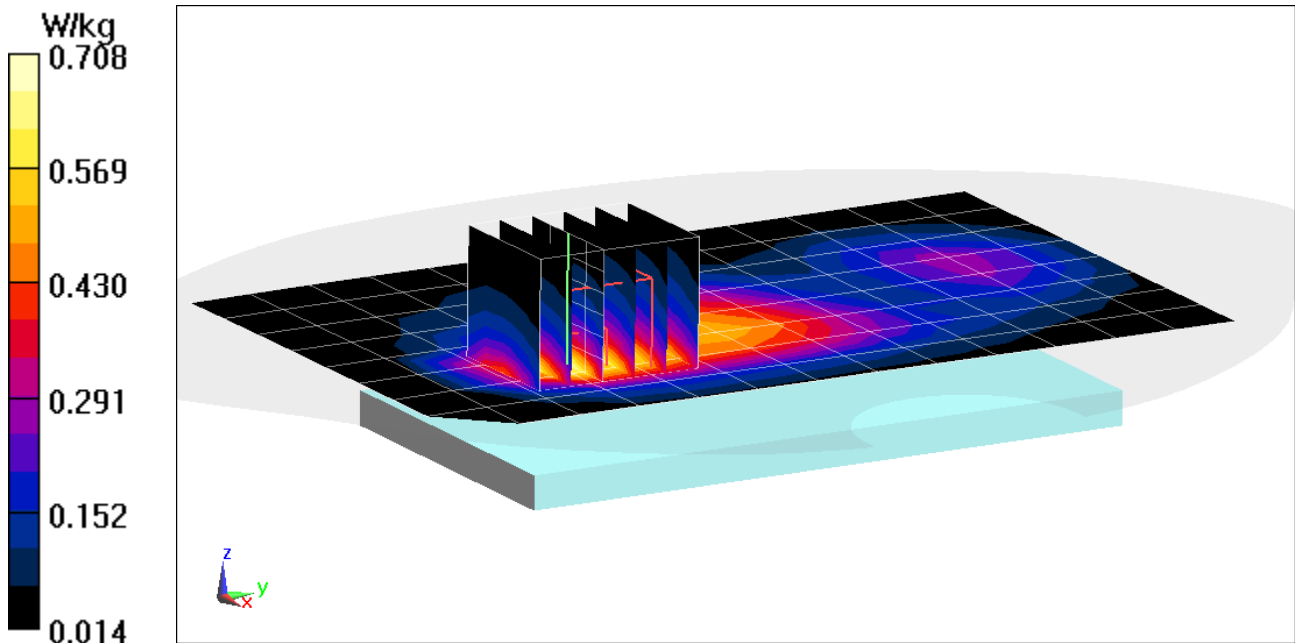
Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used:
 $f = 1880 \text{ MHz}$; $\sigma = 1.553 \text{ S/m}$; $\epsilon_r = 53.605$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-30-2018; Ambient Temp: 22.9°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn665; Calibrated: 2/15/2018
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.49 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.833 W/kg
SAR(1 g) = 0.492 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13655

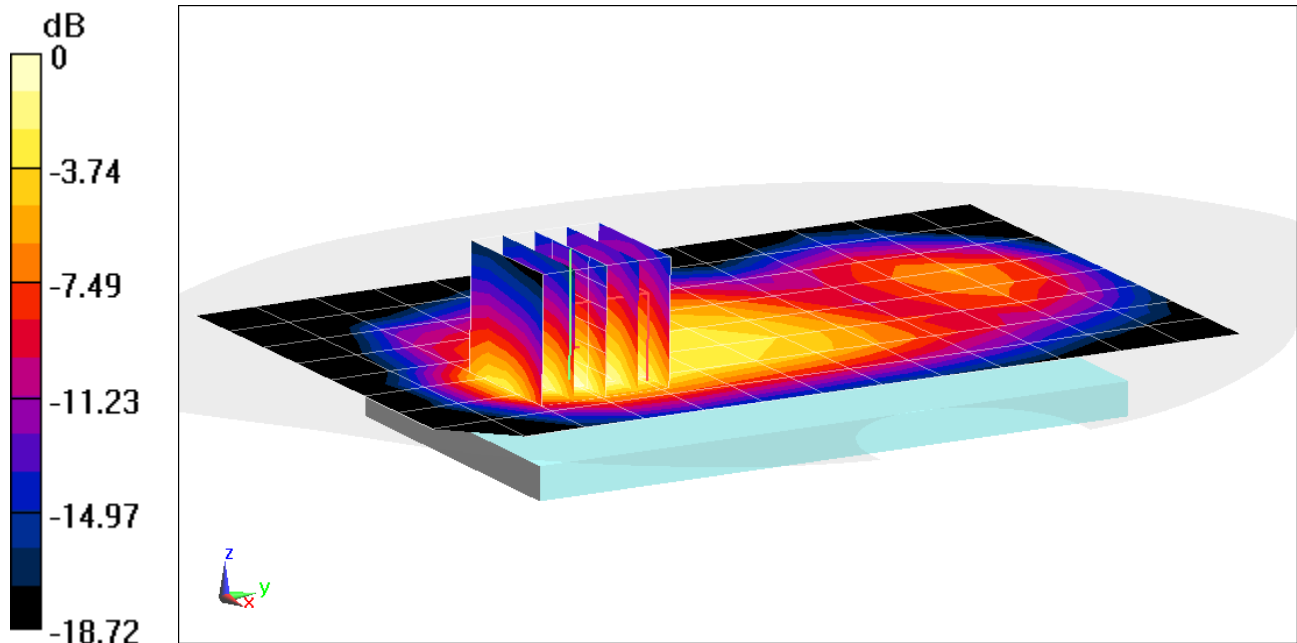
Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used:
 $f = 1880 \text{ MHz}$; $\sigma = 1.553 \text{ S/m}$; $\epsilon_r = 53.605$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-30-2018; Ambient Temp: 22.9°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn665; Calibrated: 2/15/2018
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch

Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 22.26 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.28 W/kg
SAR(1 g) = 0.707 W/kg



0 dB = 1.04 W/kg = 0.17 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13291

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.996 \text{ S/m}$; $\epsilon_r = 56.233$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-29-2018; Ambient Temp: 22.8°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3287; ConvF(6.71, 6.71, 6.71); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: LTE Band 13, Body SAR, Back side, Mid.ch,

10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset

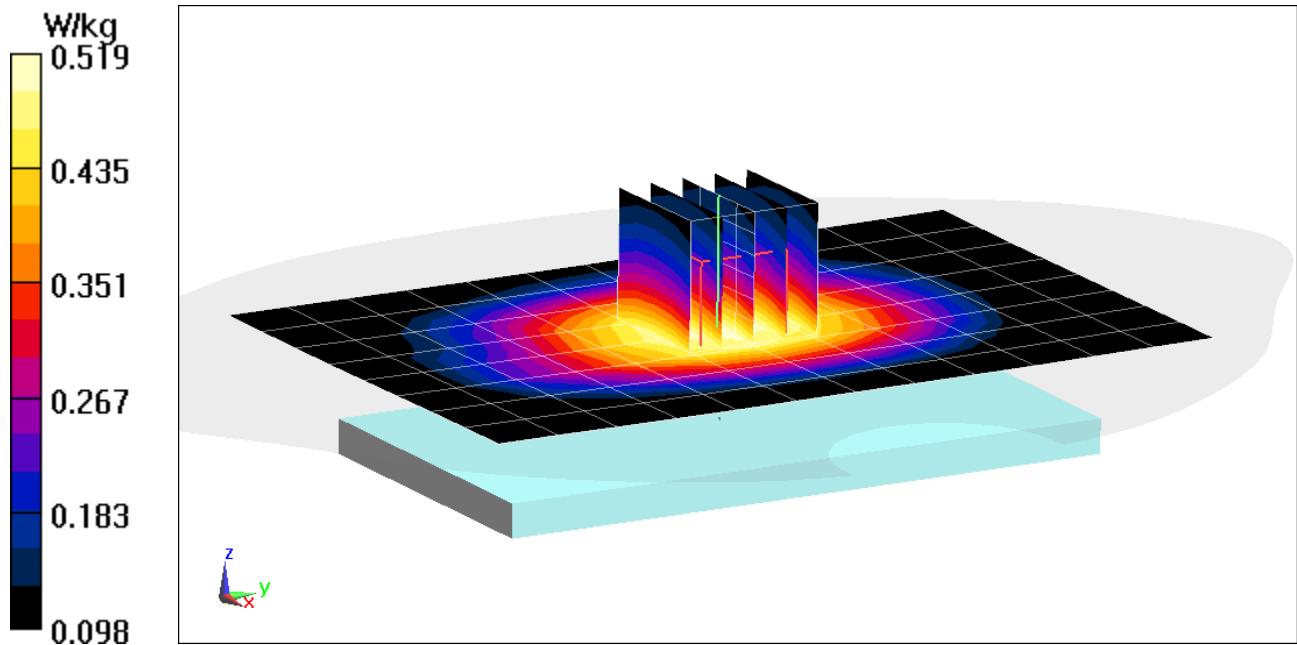
Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.66 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.476 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13291

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.996 \text{ S/m}$; $\epsilon_r = 56.233$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-29-2018; Ambient Temp: 22.8°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3287; ConvF(6.71, 6.71, 6.71); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

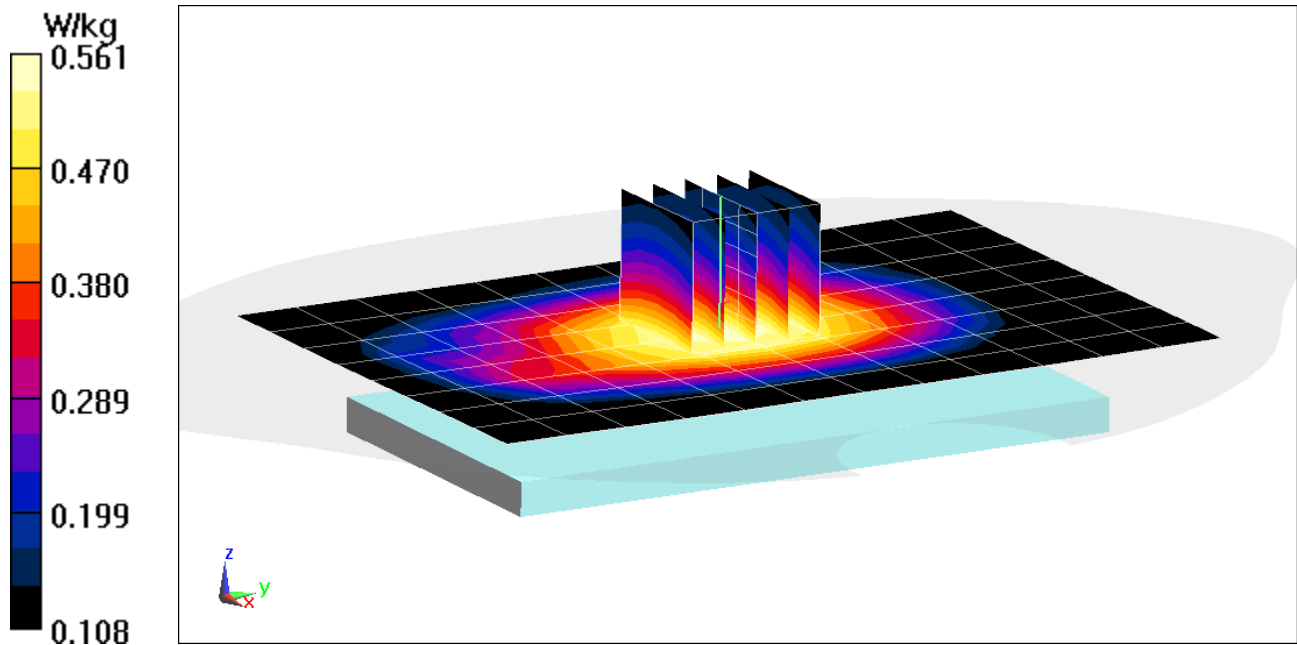
Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.41 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.631 W/kg

SAR(1 g) = 0.516 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.5$ MHz; $\sigma = 0.959$ S/m; $\epsilon_r = 52.837$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-22-2018; Ambient Temp: 21.3°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

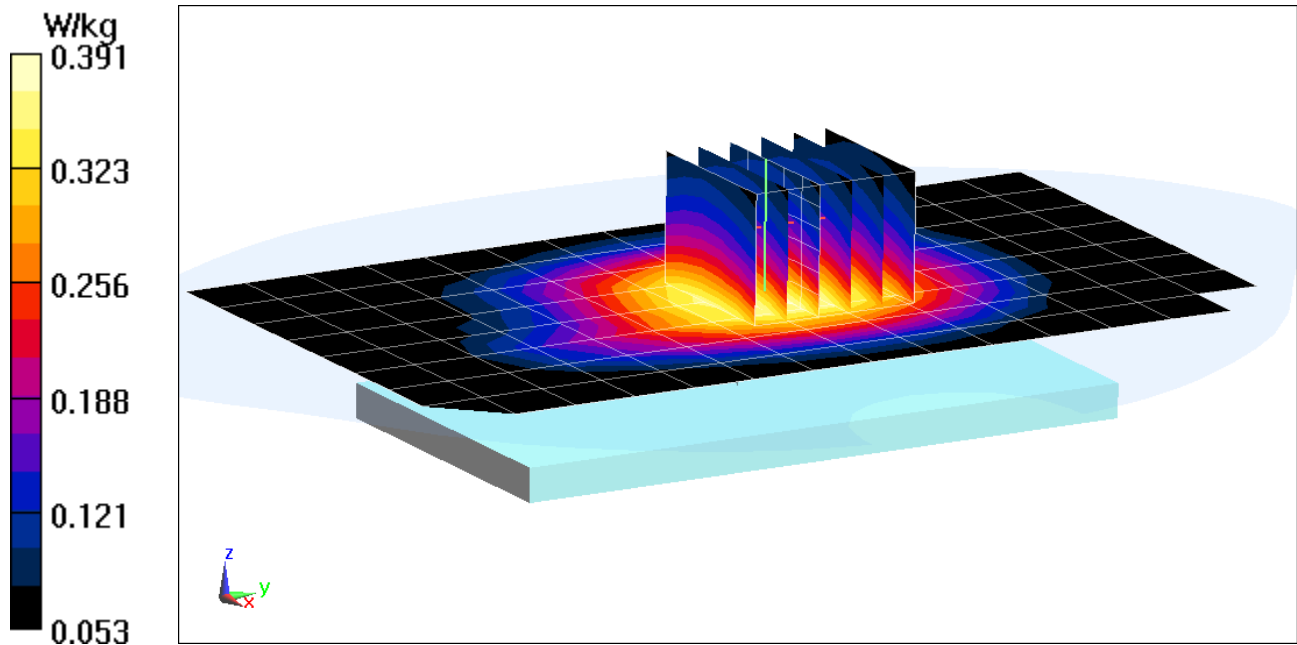
Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.04 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.444 W/kg

SAR(1 g) = 0.357 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: 835 Body Medium parameters used (interpolated):
 $f = 836.5$ MHz; $\sigma = 0.959$ S/m; $\epsilon_r = 52.837$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-22-2018; Ambient Temp: 21.3°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

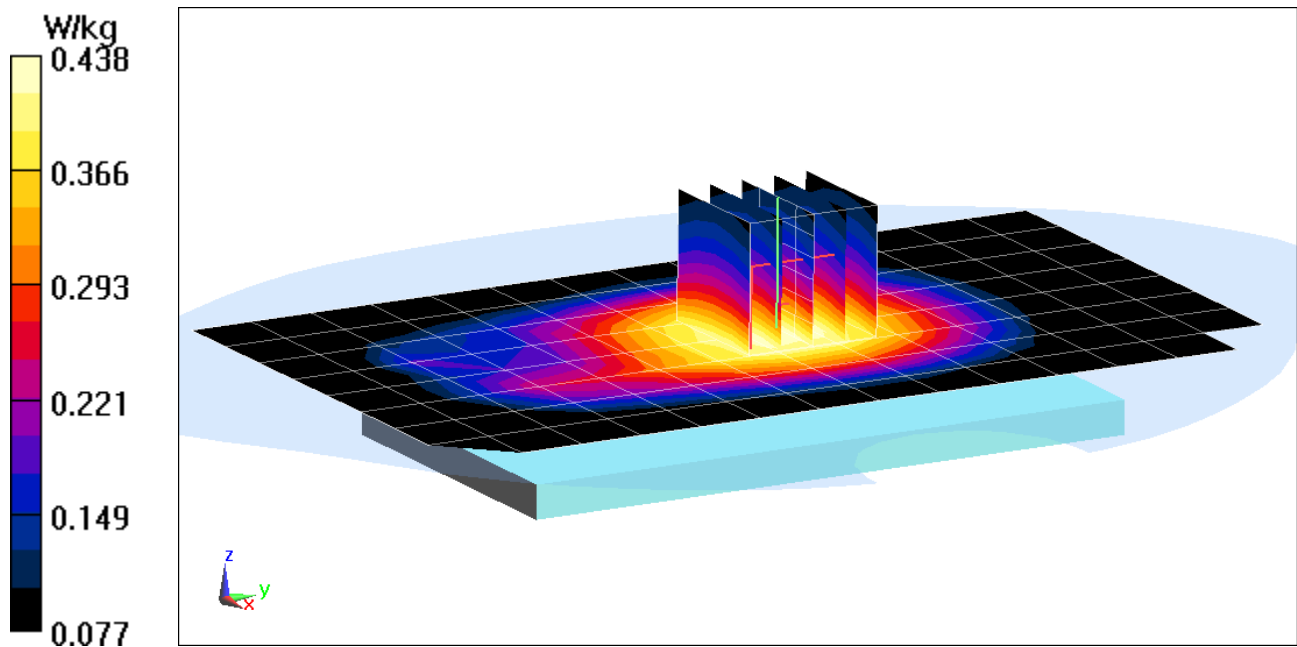
Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.19 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.402 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

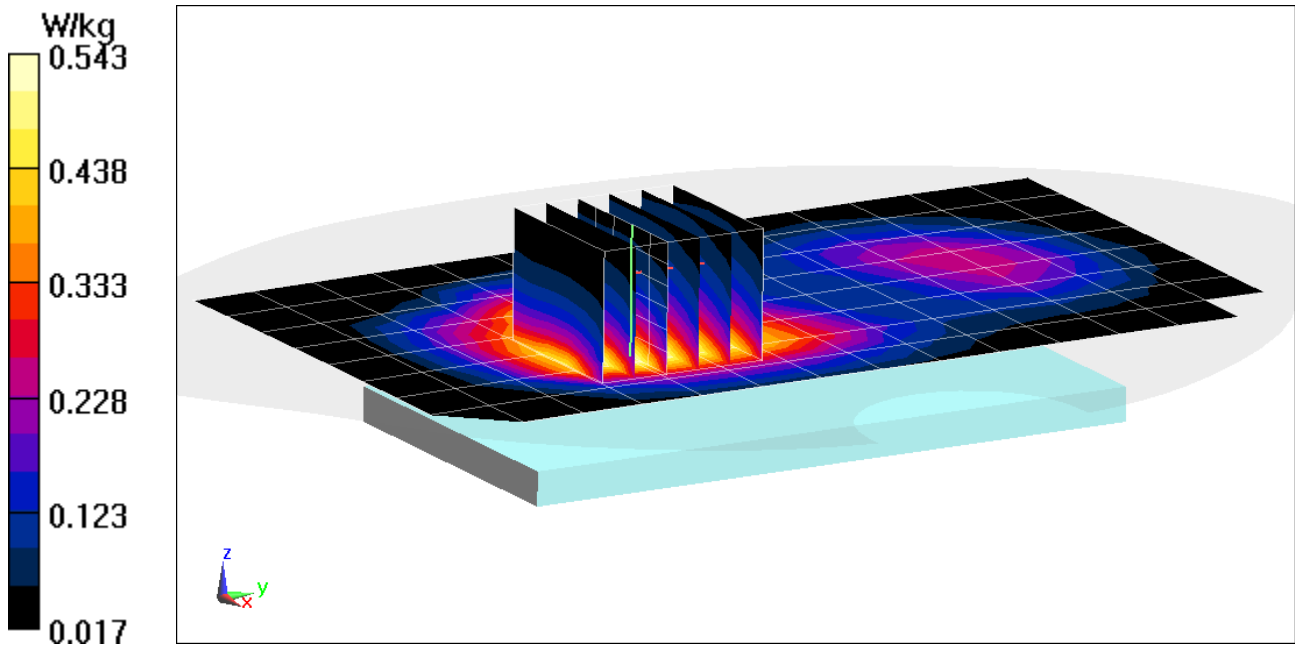
Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used (interpolated):
 $f = 1732.5 \text{ MHz}$; $\sigma = 1.495 \text{ S/m}$; $\epsilon_r = 50.99$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-23-2018; Ambient Temp: 23.2°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017
Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 16.97 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.628 W/kg
SAR(1 g) = 0.408 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13655

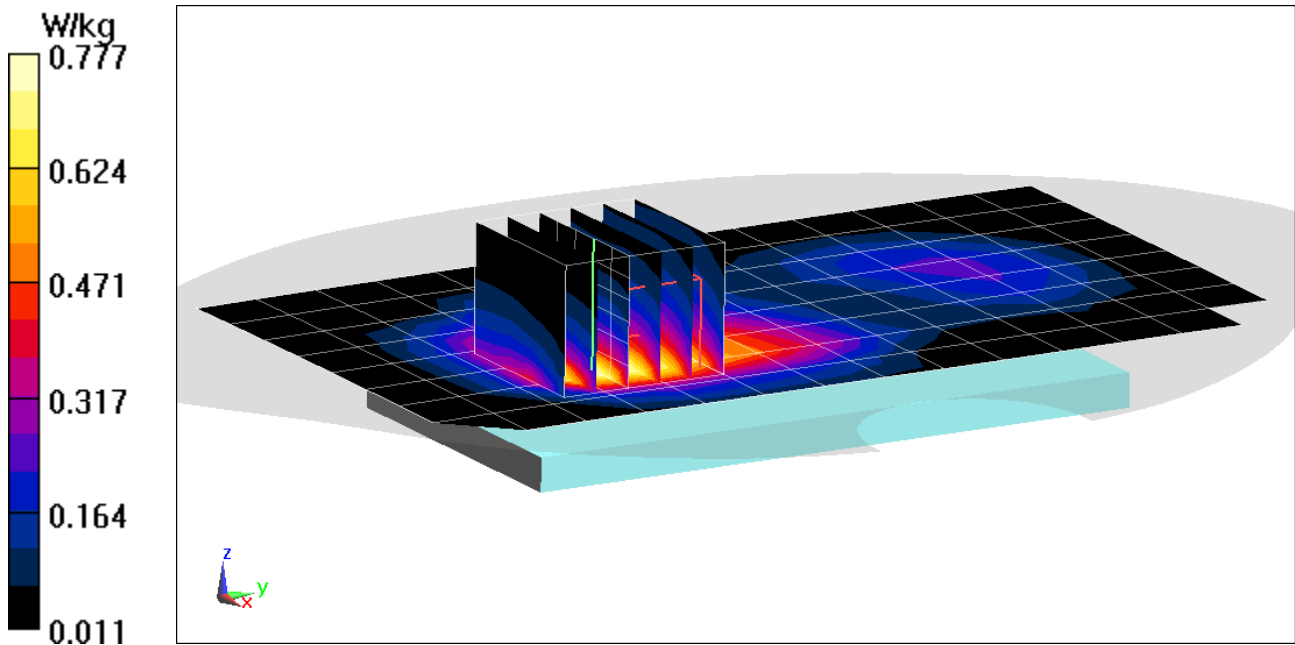
Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used (interpolated):
 $f = 1732.5 \text{ MHz}$; $\sigma = 1.495 \text{ S/m}$; $\epsilon_r = 50.99$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-23-2018; Ambient Temp: 23.2°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017
Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.33 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.924 W/kg
SAR(1 g) = 0.560 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.557 \text{ S/m}$; $\epsilon_r = 52.639$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-24-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 2 (PCS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

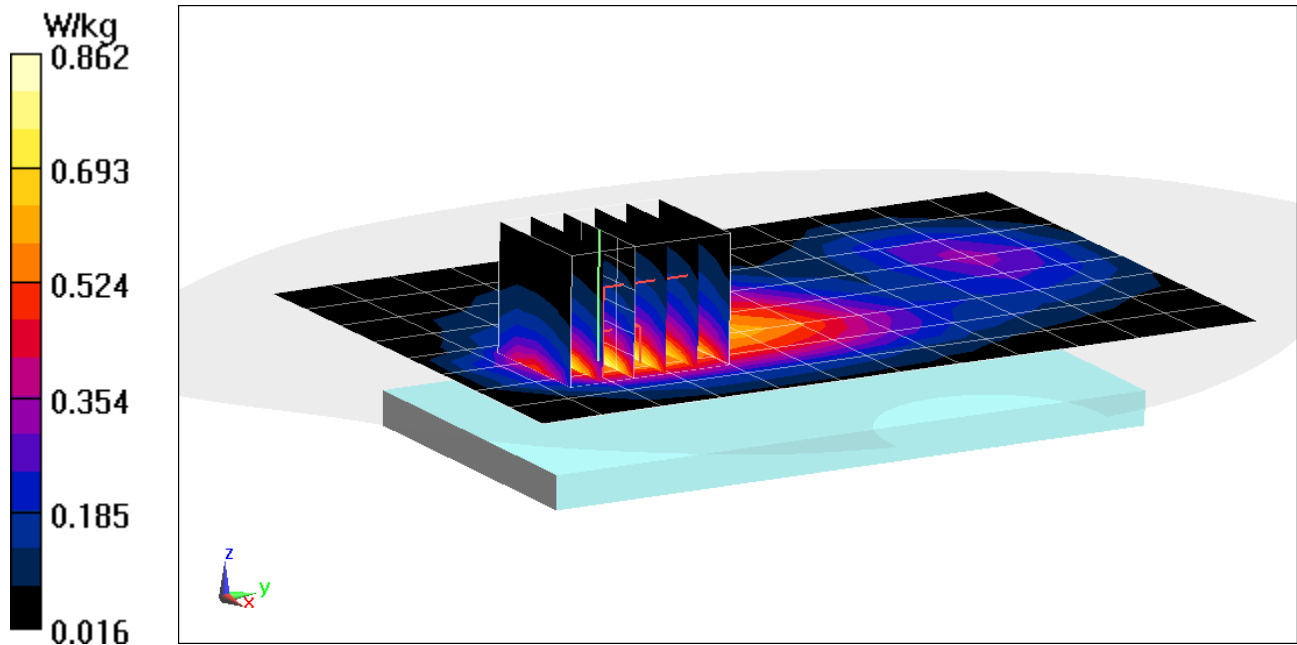
Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.33 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.596 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13655

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.557 \text{ S/m}$; $\epsilon_r = 52.639$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-24-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 2 (PCS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

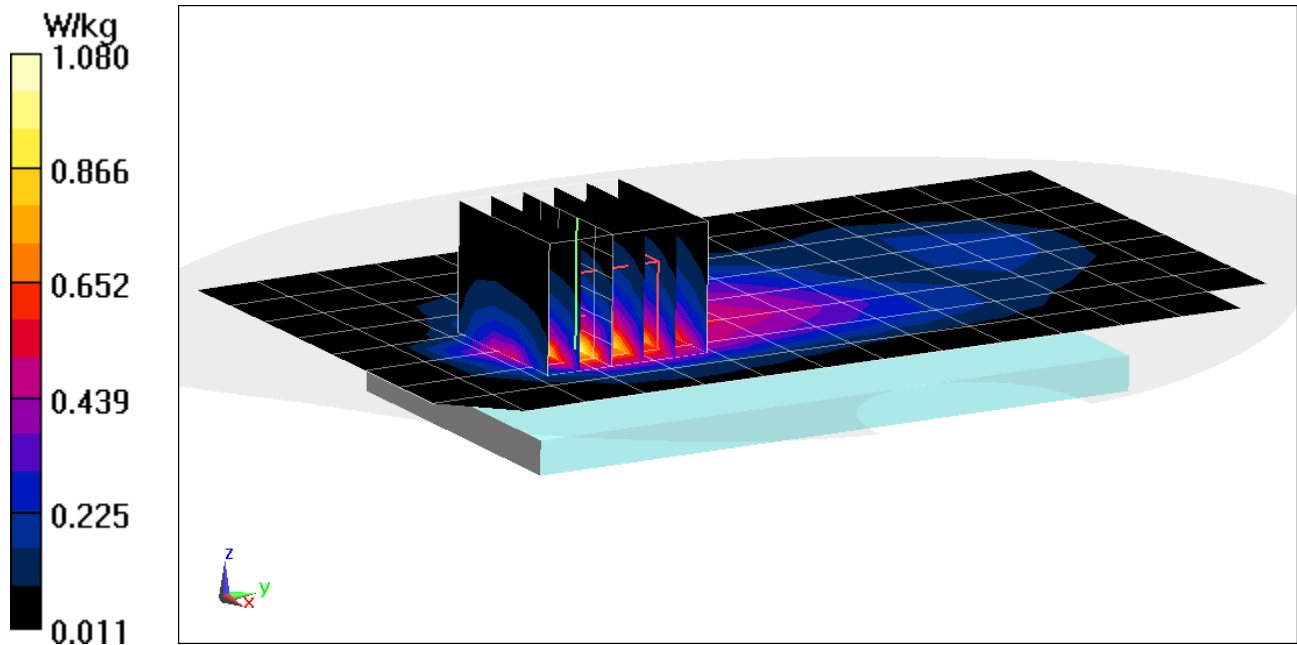
Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.53 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.736 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13291

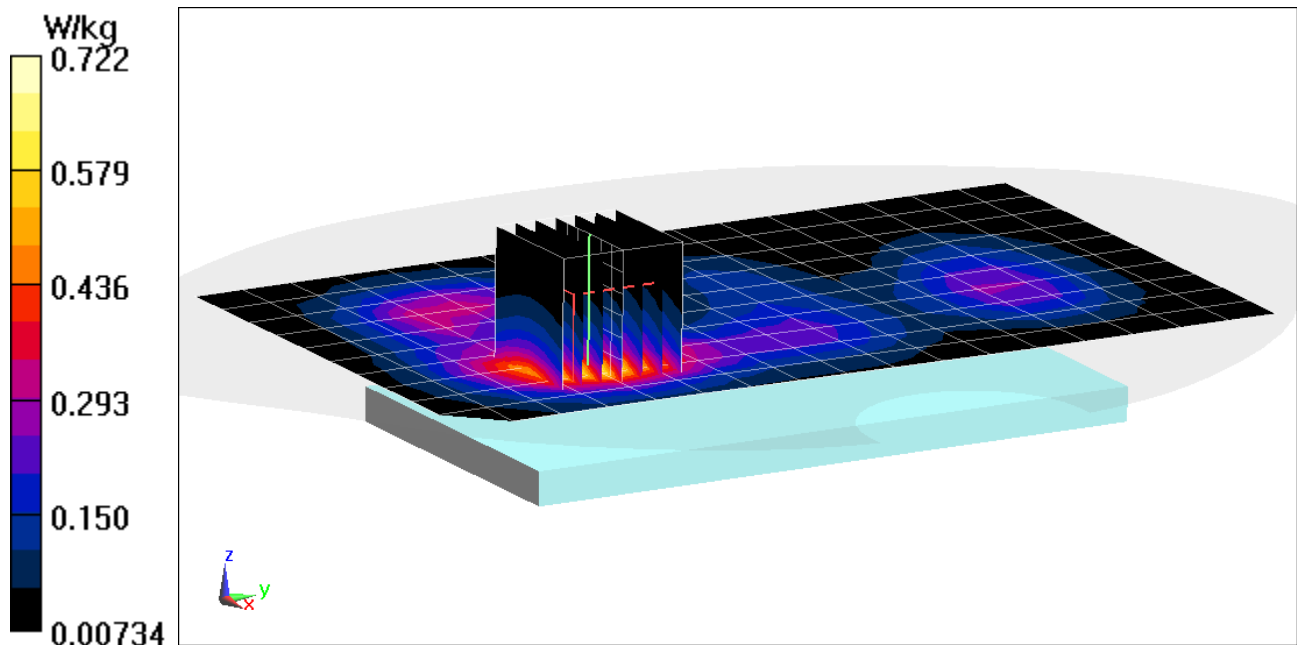
Communication System: UID 0, LTE Band 7; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: 2600 Body Medium parameters used (interpolated):
 $f = 2560$ MHz; $\sigma = 2.182$ S/m; $\epsilon_r = 50.769$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-31-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7406; ConvF(7.31, 7.31, 7.31); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017
Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 7, Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 15.26 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.891 W/kg
SAR(1 g) = 0.459 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13655

Communication System: UID 0, LTE Band 7; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: 2600 Body Medium parameters used (interpolated):
 $f = 2560$ MHz; $\sigma = 2.182$ S/m; $\epsilon_r = 50.769$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-31-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7406; ConvF(7.31, 7.31, 7.31); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 7, Body SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

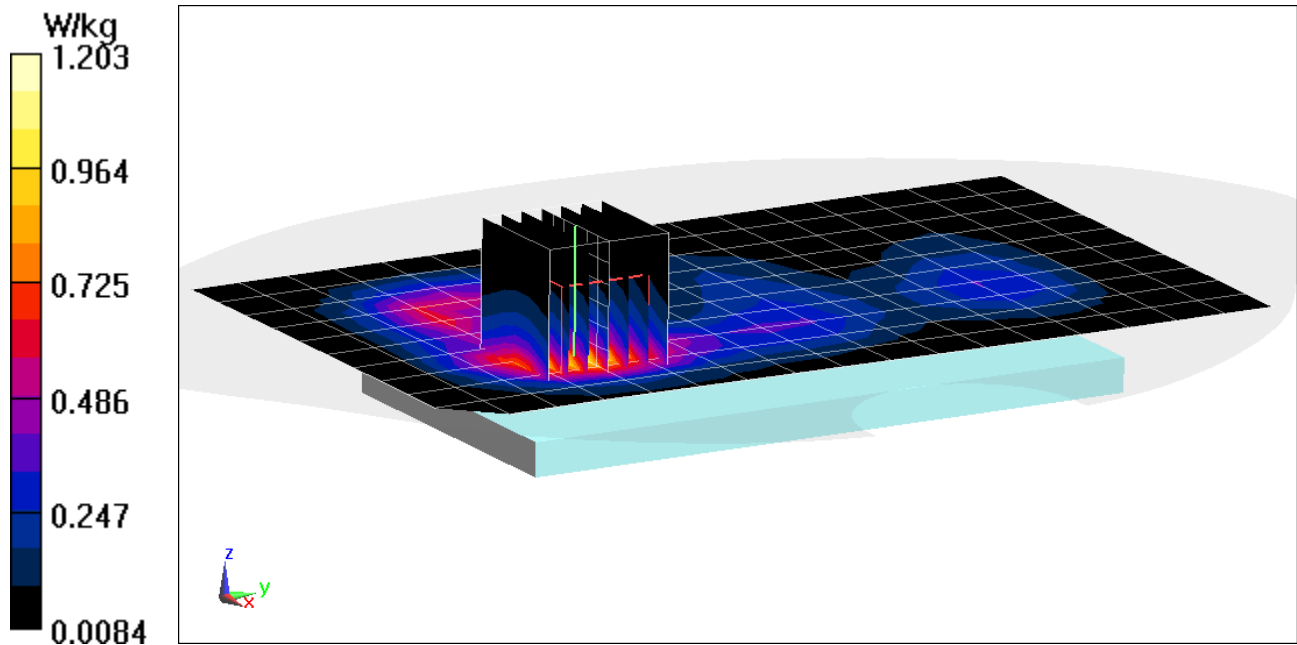
Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.65 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.766 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 34016

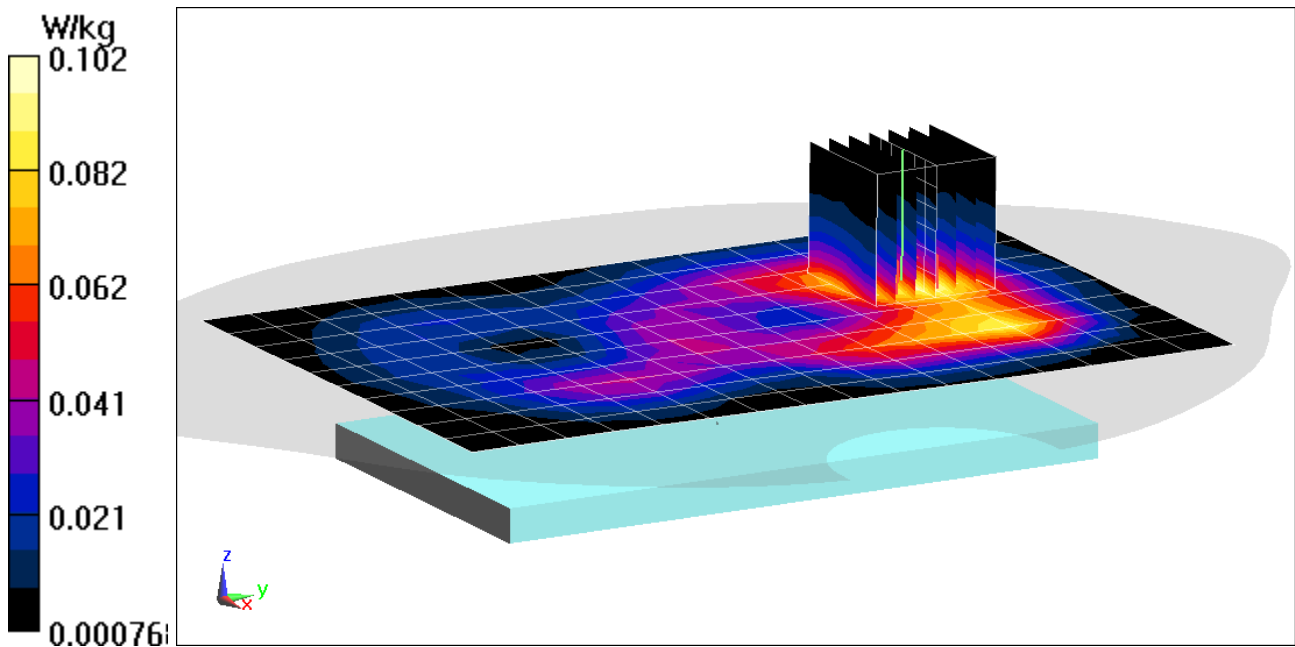
Communication System: UID 0, 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: 2450 Body Medium parameters used (interpolated):
 $f = 2437 \text{ MHz}$; $\sigma = 2.029 \text{ S/m}$; $\epsilon_r = 51.168$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-03-2018; Ambient Temp: 22.4°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51); Calibrated: 3/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1368; Calibrated: 3/7/2018
Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b, 22 MHz Bandwidth,
Body SAR, Ch 6, 1 Mbps, Back Side**

Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.781 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.150 W/kg
SAR(1 g) = 0.083 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 34016

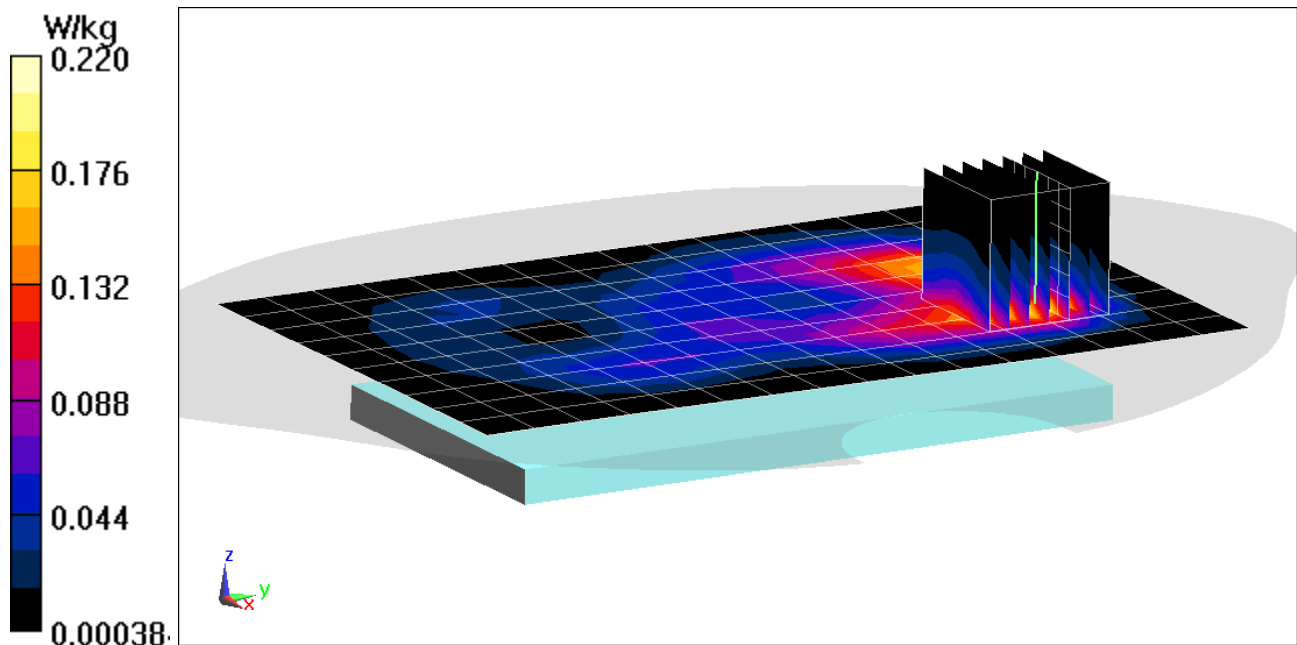
Communication System: UID 0, 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: 2450 Body Medium parameters used (interpolated):
 $f = 2437 \text{ MHz}$; $\sigma = 2.029 \text{ S/m}$; $\epsilon_r = 51.168$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-03-2018; Ambient Temp: 22.4°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51); Calibrated: 3/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1368; Calibrated: 3/7/2018
Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b, 22 MHz Bandwidth,
Body SAR, Ch 6, 1 Mbps, Back Side**

Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.309 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.376 W/kg
SAR(1 g) = 0.168 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 34016

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5620 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5620 \text{ MHz}$; $\sigma = 5.983 \text{ S/m}$; $\epsilon_r = 46.596$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04-02-2018; Ambient Temp: 22.5°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7308; ConvF(4.23, 4.23, 4.23); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11a, UNII-2C, 20 MHz Bandwidth,
Body SAR, Ch 124, 6 Mbps, Back Side**

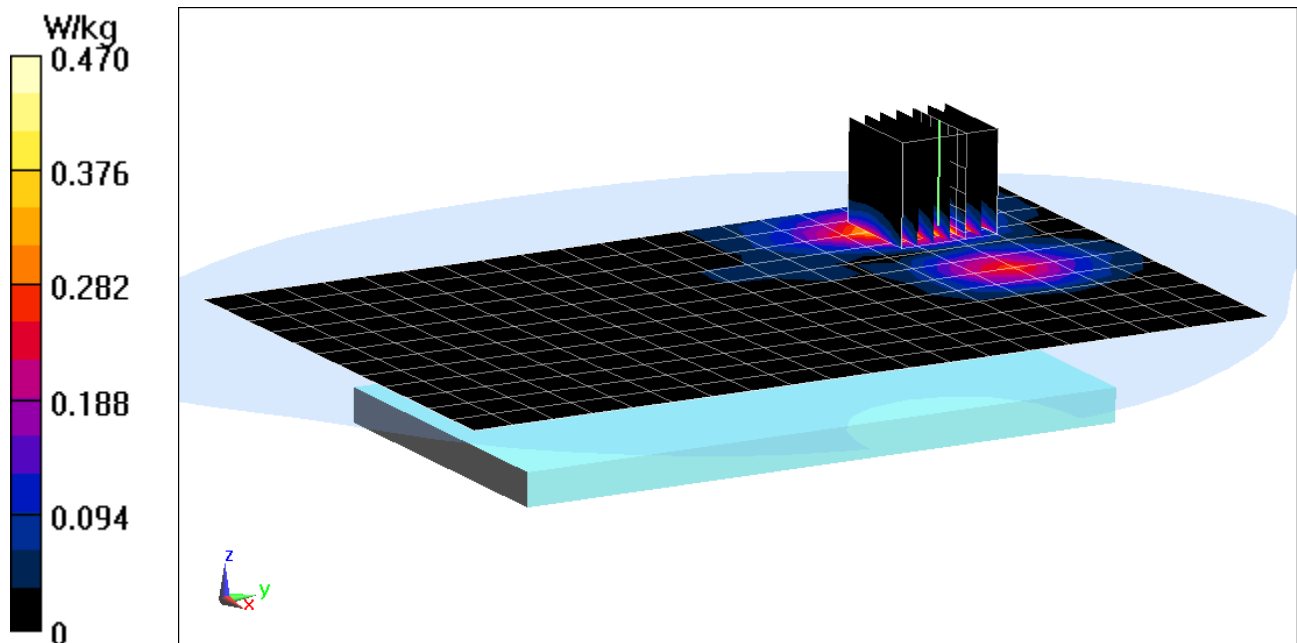
Area Scan (13x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 5.815 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.198 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 34016

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5745 \text{ MHz}$; $\sigma = 6.153 \text{ S/m}$; $\epsilon_r = 46.367$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2018; Ambient Temp: 22.5°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7308; ConvF(4.5, 4.5, 4.5); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11a, UNII-3, 20 MHz Bandwidth,
Body SAR, Ch 149, 6 Mbps, Front Side**

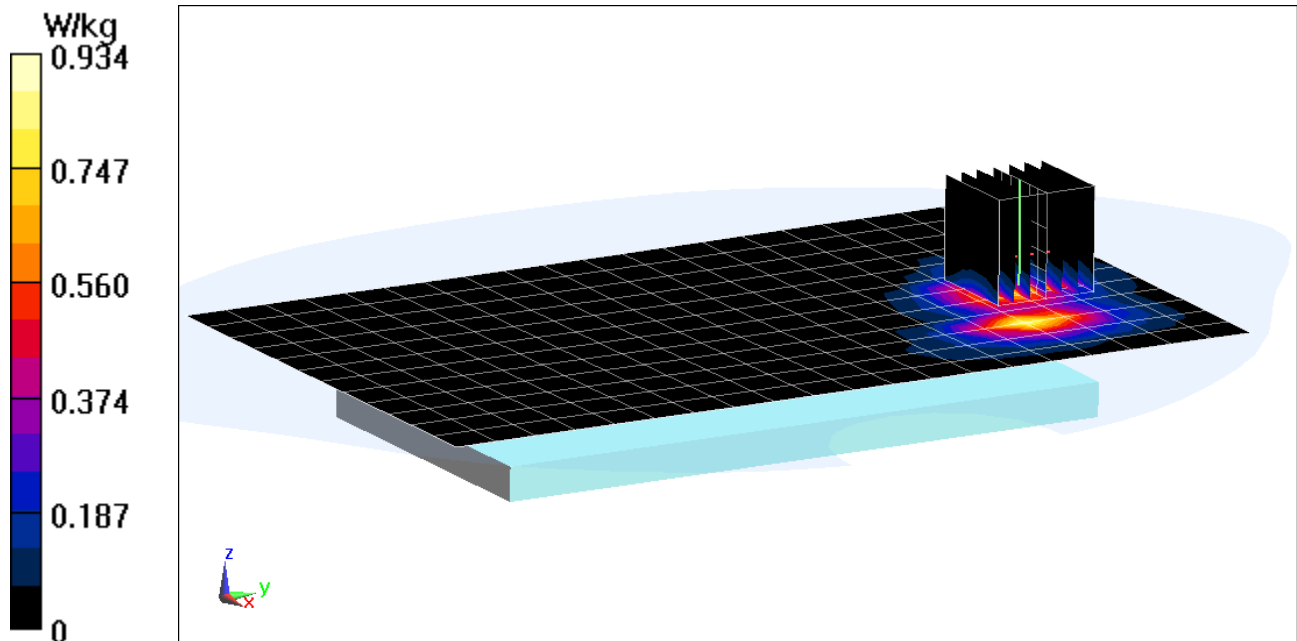
Area Scan (13x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 0.3600 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.378 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

Communication System: UID 0, CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used (interpolated):
 $f = 1851.25 \text{ MHz}$; $\sigma = 1.521 \text{ S/m}$; $\epsilon_r = 53.874$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 0.2 cm

Test Date: 04-05-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: PCS EVDO, Phablet SAR, Front side, Low.ch

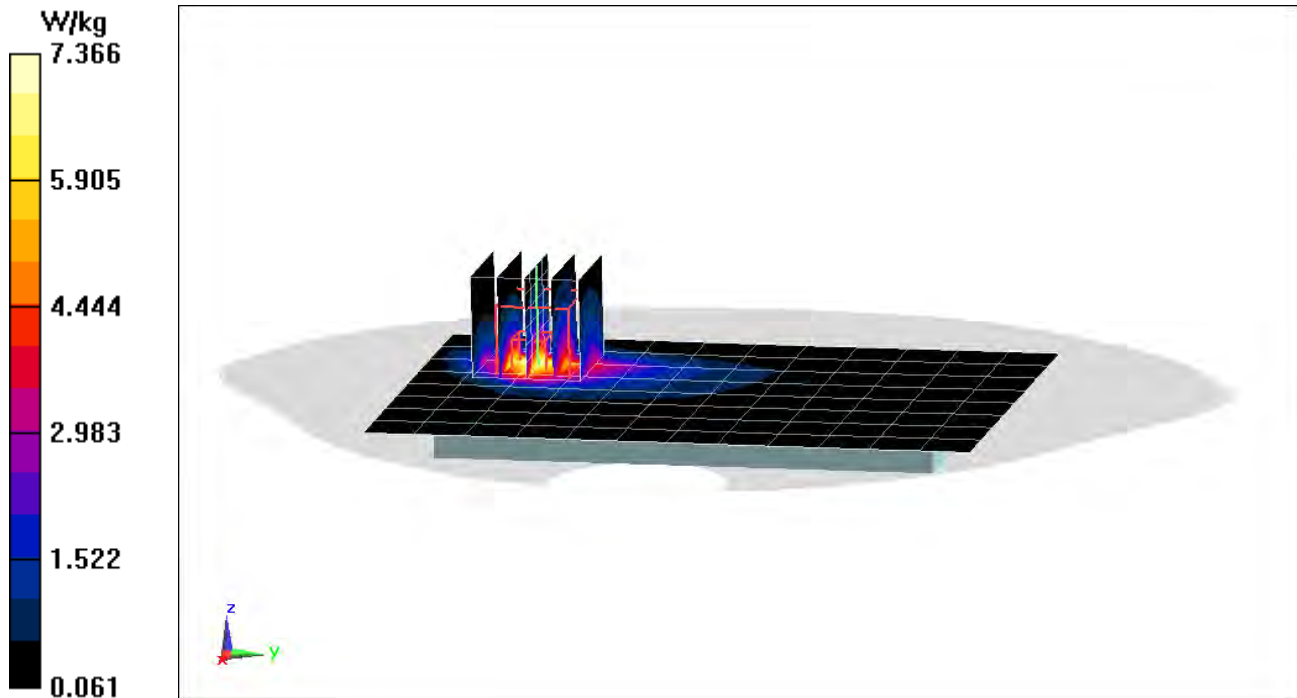
Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 61.09 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 9.94 W/kg

SAR(10 g) = 2.76 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13655

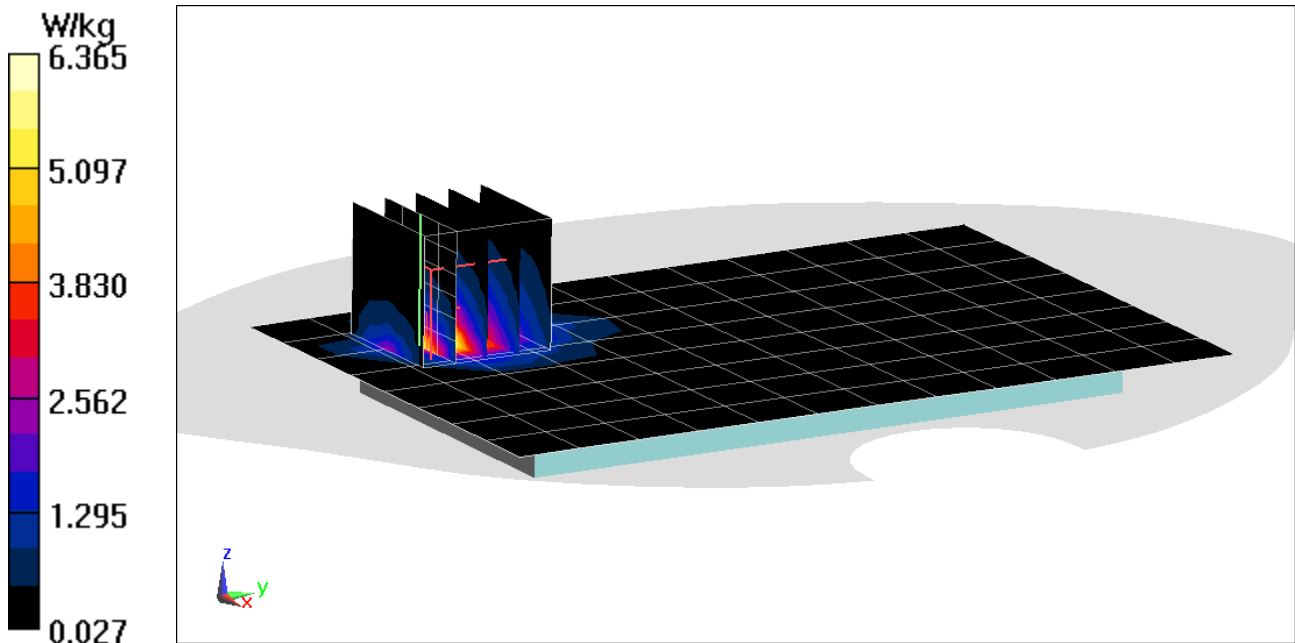
Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used:
 $f = 1880 \text{ MHz}$; $\sigma = 1.555 \text{ S/m}$; $\epsilon_r = 54.092$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-02-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn665; Calibrated: 2/15/2018
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

Mode: UMTS 1900, Phablet SAR, Front side, Mid.ch

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 54.22 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 9.81 W/kg
SAR(10 g) = 2.01 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13655

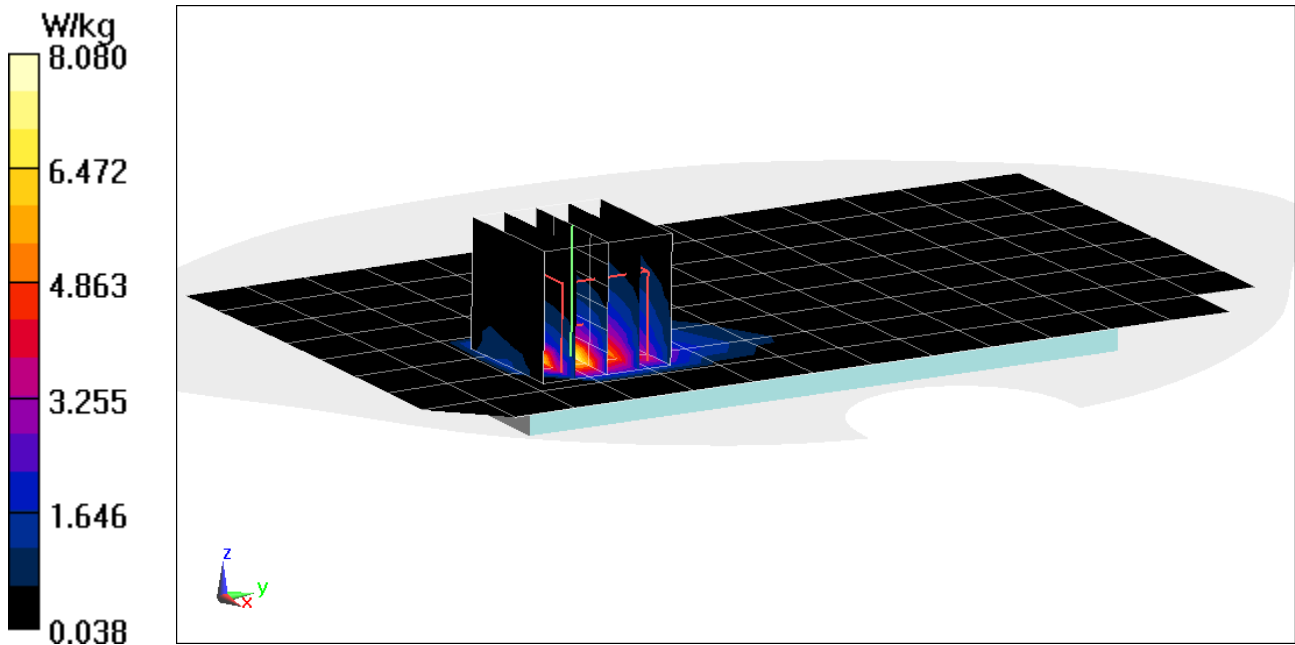
Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used (interpolated):
 $f = 1732.5$ MHz; $\sigma = 1.506$ S/m; $\epsilon_r = 51.217$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03-26-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017
Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 4 (AWS), Phablet SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 58.65 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 12.1 W/kg
SAR(10 g) = 2.42 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 28349

Communication System: UID 0, LTE Band 2 (PCS); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.557 \text{ S/m}$; $\epsilon_r = 52.639$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.2 cm

Test Date: 03-24-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 2 (PCS), Phablet SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

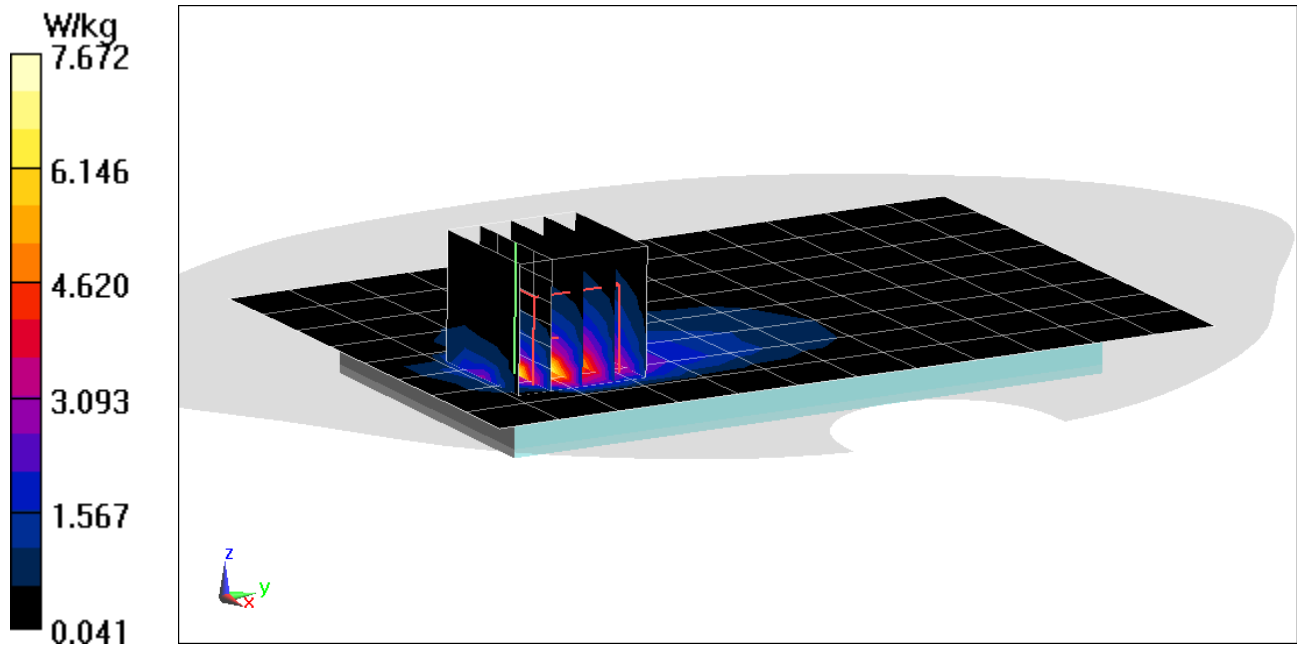
Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.85 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 11.2 W/kg

SAR(10 g) = 2.40 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 13655

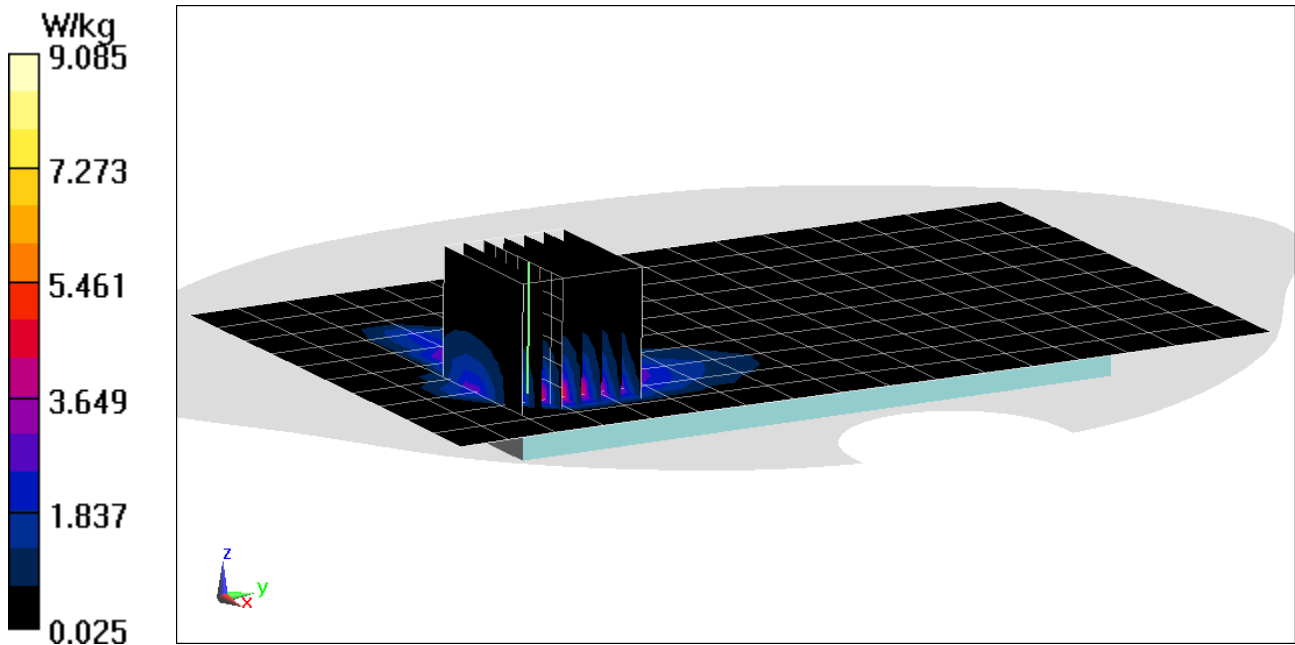
Communication System: UID 0, LTE Band 7; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: 2600 Body Medium parameters used (interpolated):
 $f = 2560$ MHz; $\sigma = 2.182$ S/m; $\epsilon_r = 50.769$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03-31-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7406; ConvF(7.31, 7.31, 7.31); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017
Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 7, Phablet SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 48.42 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 12.7 W/kg
SAR(10 g) = 2.21 W/kg



PCTEST ENGINEERING LABORATORY, INC.

DUT: A3LSMJ737V; Type: Portable Handset; Serial: 34016

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5620 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5620 \text{ MHz}$; $\sigma = 5.983 \text{ S/m}$; $\epsilon_r = 46.596$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-02-2018; Ambient Temp: 22.5°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7308; ConvF(4.23, 4.23, 4.23); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11a, U-NII-2C, 20 MHz Bandwidth, Phablet SAR,
Ch 124, 6 Mbps, Top Edge**

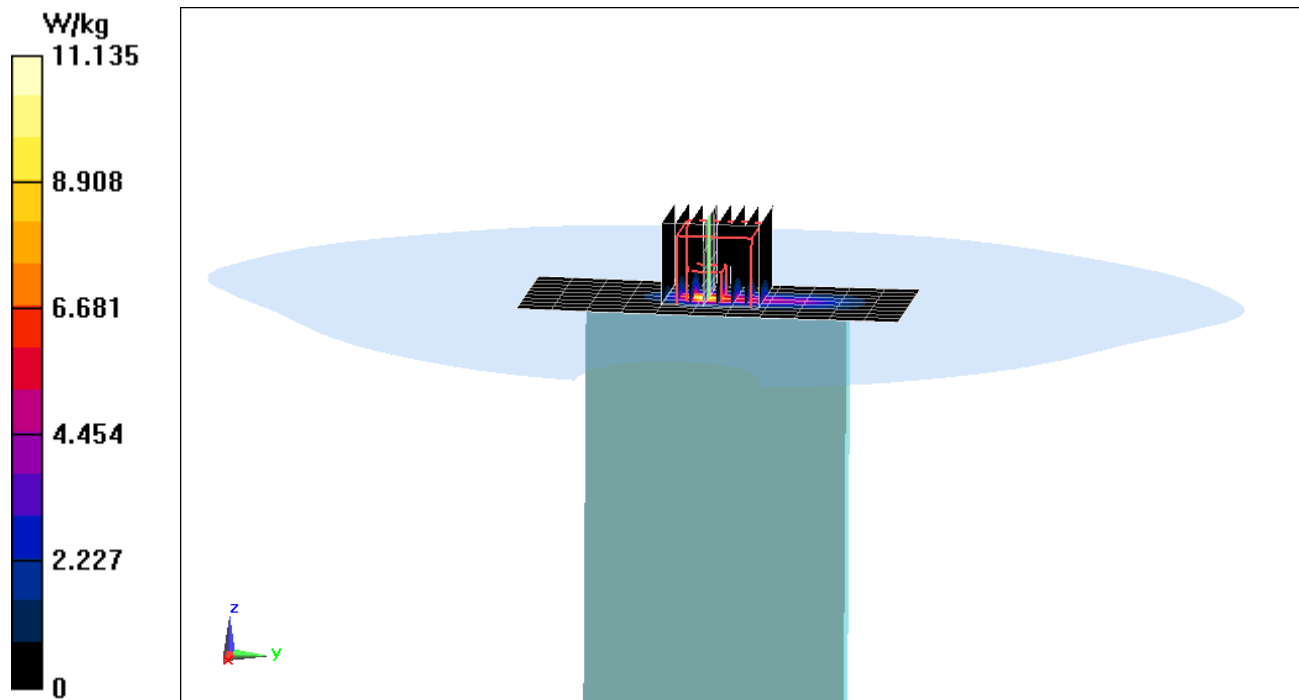
Area Scan (10x12x1): Measurement grid: dx=5mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 26.30 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 22.5 W/kg

SAR(10 g) = 1.01 W/kg



APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161

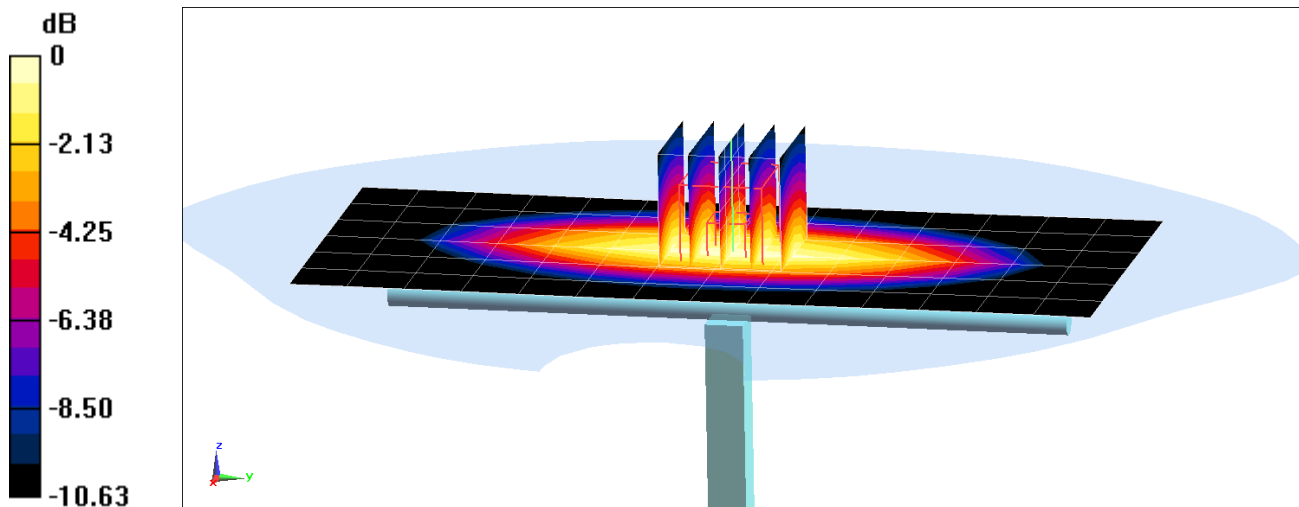
Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium: 750 Head Medium parameters used (interpolated):
 $f = 750 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 42.541$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-30-2018; Ambient Temp: 23.8°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7410; ConvF(10.6, 10.6, 10.6); Calibrated: 7/17/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1322; Calibrated: 7/13/2017
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

750 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.41 W/kg
SAR(1 g) = 1.62 W/kg
Deviation(1 g) = -0.86%



0 dB = 2.15 W/kg = 3.32 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.899 \text{ S/m}$; $\epsilon_r = 41.025$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-25-2018; Ambient Temp: 23.5°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

835 MHz System Verification at 23.0 dBm (200 mW)

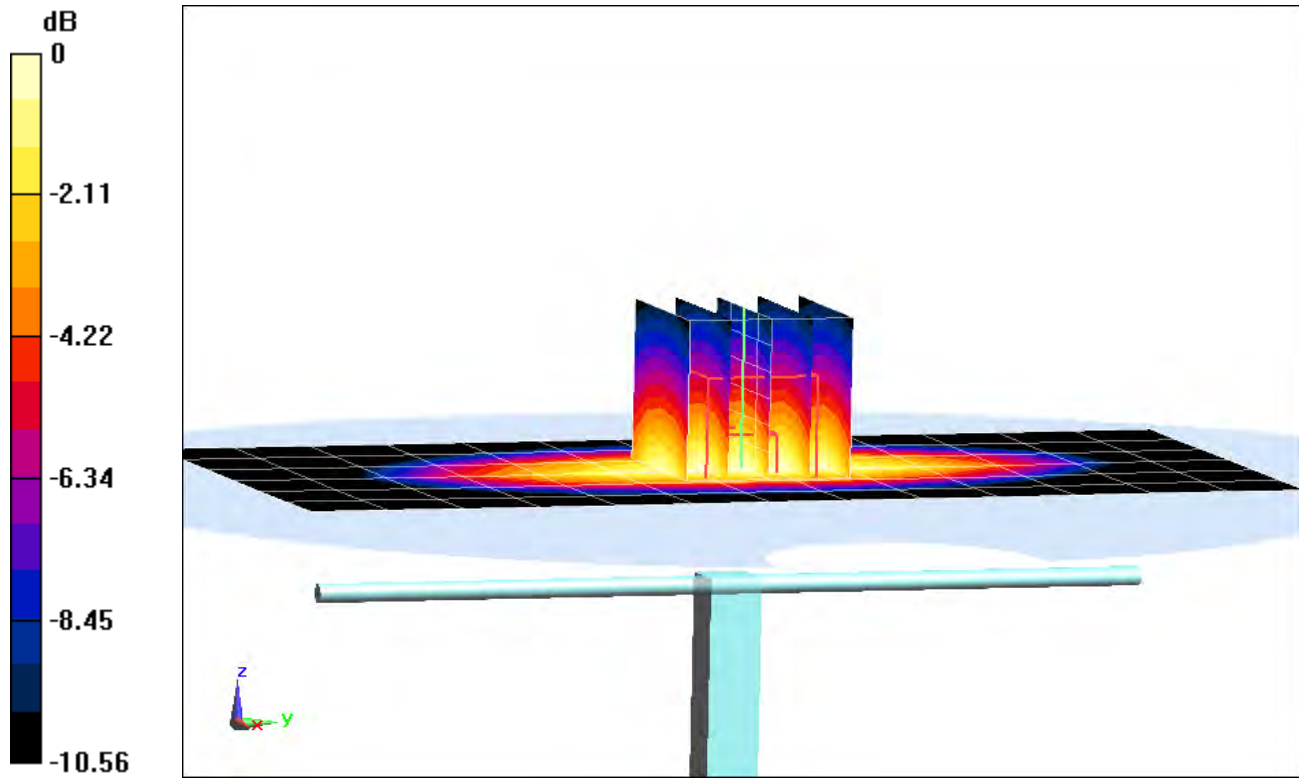
Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.92 W/kg

SAR(1 g) = 1.98 W/kg

Deviation(1 g) = 5.77%



0 dB = 2.31 W/kg = 3.64 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.396 \text{ S/m}$; $\epsilon_r = 39.468$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-20-2018; Ambient Temp: 22.8°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(8.66, 8.66, 8.66); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)

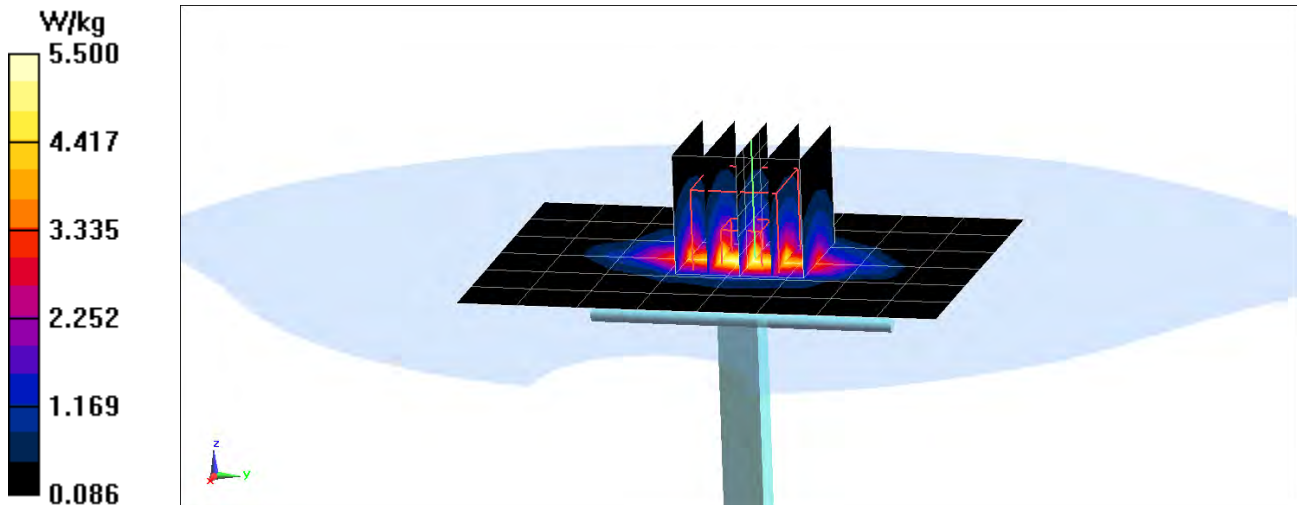
Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.57 W/kg

SAR(1 g) = 3.54 W/kg

Deviation(1 g) = -2.75%



PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

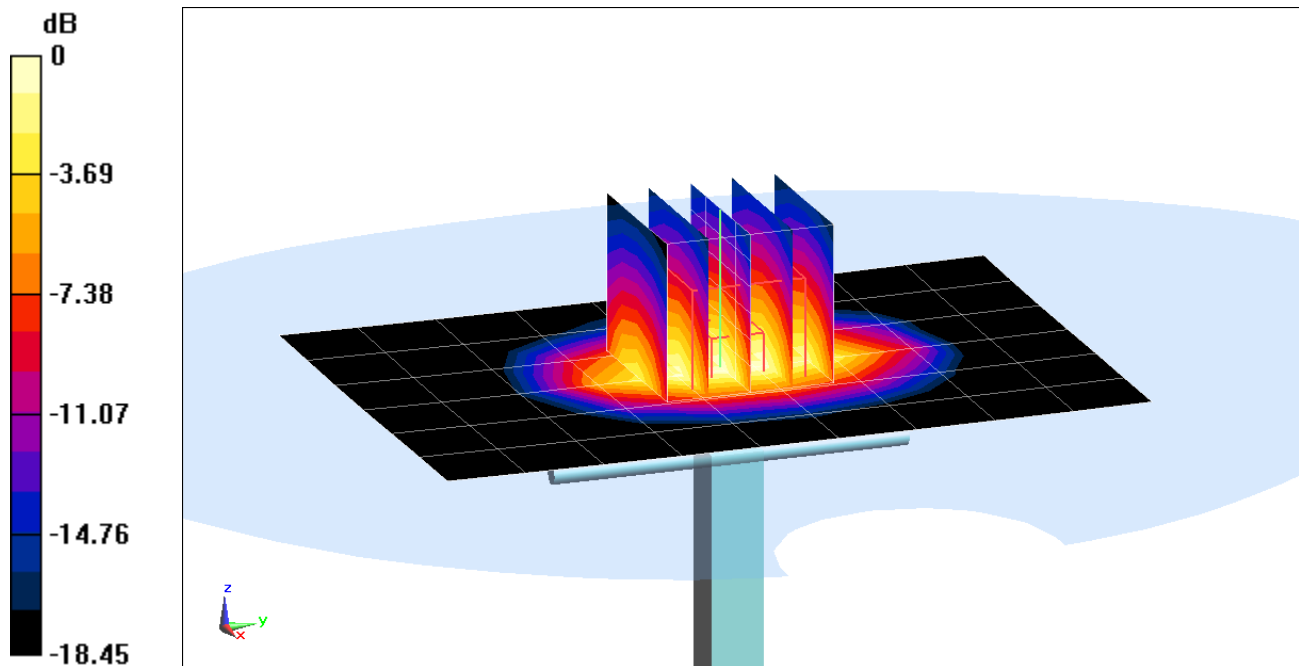
Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Head Medium parameters used (interpolated):
 $f = 1900 \text{ MHz}$; $\sigma = 1.398 \text{ S/m}$; $\epsilon_r = 39.163$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2018; Ambient Temp: 22.9°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3332; ConvF(5.33, 5.33, 5.33); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Left; Type: QD000P40CA; Serial: TP:82355
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 6.66 W/kg
SAR(1 g) = 3.66 W/kg
Deviation(1 g) = -6.87%



0 dB = 4.63 W/kg = 6.66 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

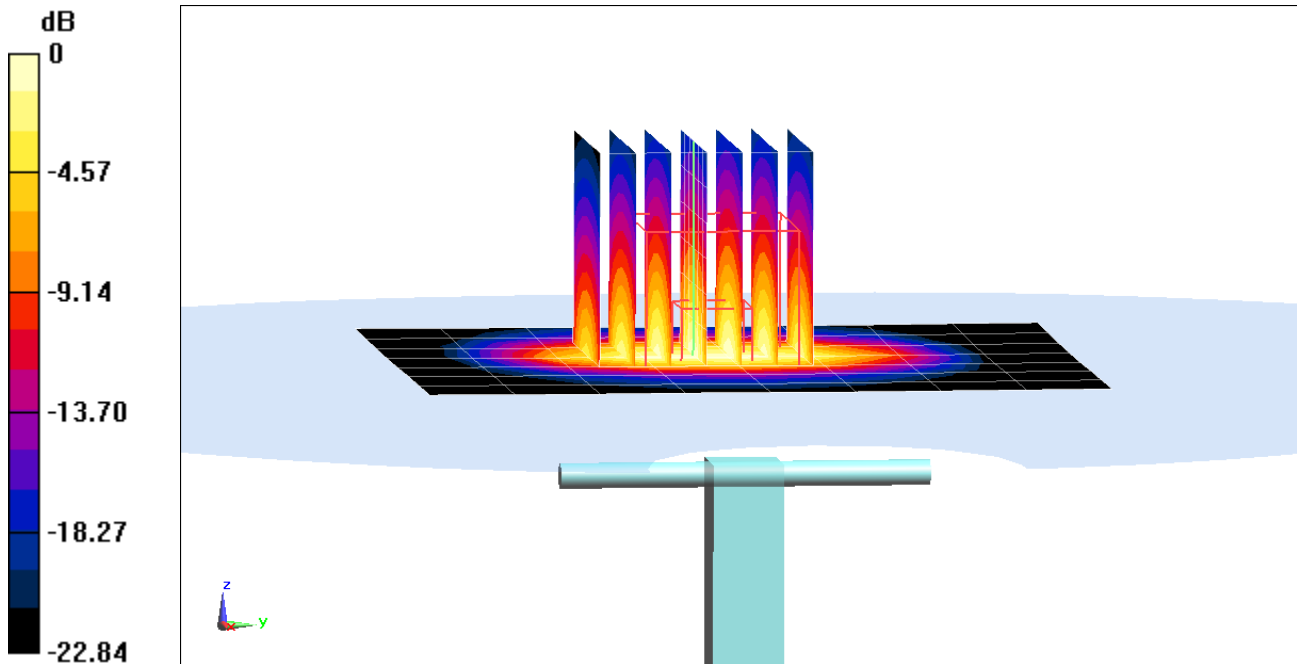
Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: 2450 Head Medium parameters used:
 $f = 2450 \text{ MHz}$; $\sigma = 1.841 \text{ S/m}$; $\epsilon_r = 40.128$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-30-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(4.68, 4.68, 4.68); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Front; Type: SAM; Serial: 1686
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Peak SAR (extrapolated) = 10.3 W/kg
SAR(1 g) = 5 W/kg
Deviation(1 g) = -5.12%



0 dB = 6.54 W/kg = 8.16 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126

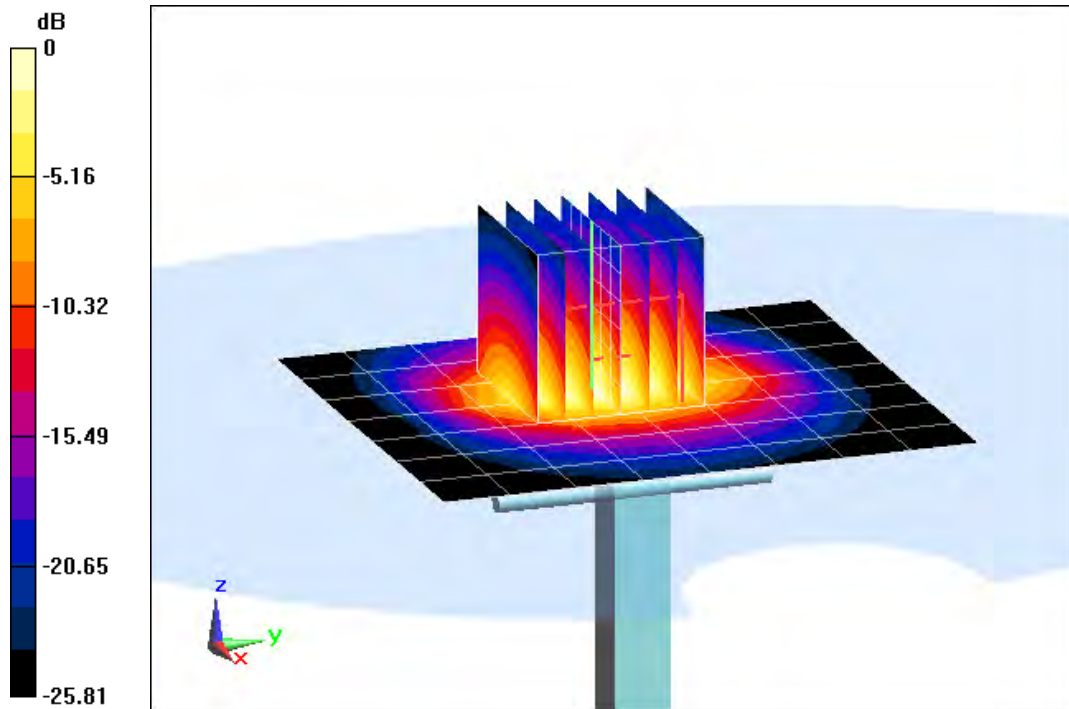
Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1
Medium: 2600 Head Medium parameters used:
 $f = 2600 \text{ MHz}$; $\sigma = 2.024 \text{ S/m}$; $\epsilon_r = 39.431$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-18-2018; Ambient Temp: 21.7°C; Tissue Temp: 21.5°C

Probe: ES3DV3 - SN3332; ConvF(4.56, 4.56, 4.56); Calibrated: 8/14/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1323; Calibrated: 8/9/2017
Phantom: SAM Front; Type: SAM; Serial: 1686
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2600 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Peak SAR (extrapolated) = 12.6 W/kg
SAR(1 g) = 5.55 W/kg
Deviation(1 g) = -1.60%



0 dB = 7.39 W/kg = 8.69 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1120

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1
Medium: 5GHz Head Medium parameters used (interpolated):
 $f = 5250 \text{ MHz}$; $\sigma = 4.67 \text{ S/m}$; $\epsilon_r = 37.535$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-26-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(4.69, 4.69, 4.69); Calibrated: 1/16/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1322; Calibrated: 7/13/2017
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5250 MHz System Verification at 17.0 dBm (50 mW)

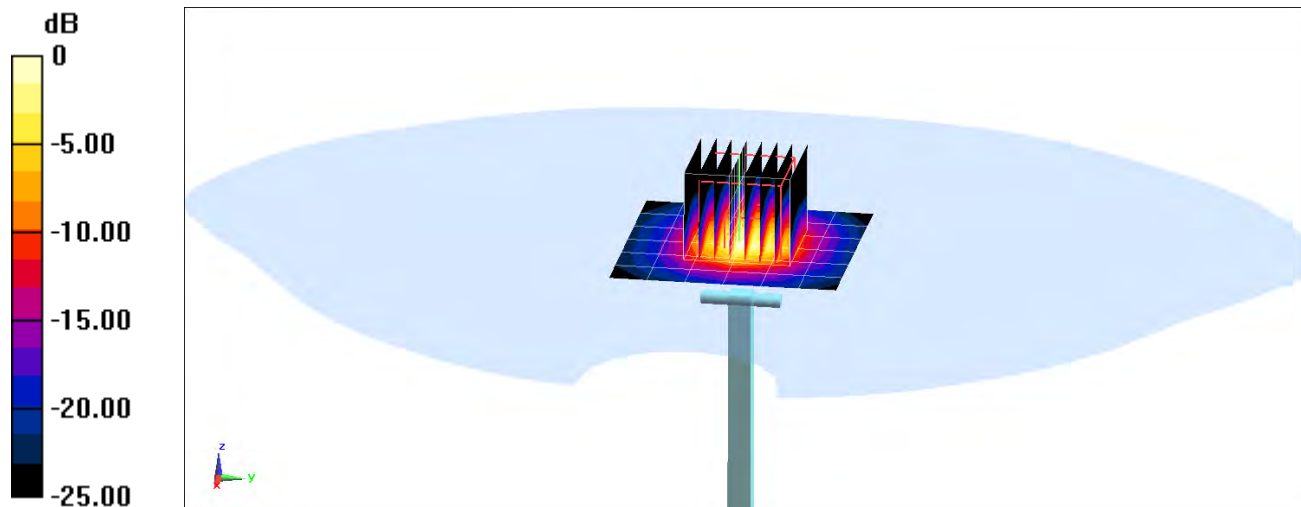
Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 3.9 W/kg

Deviation(1 g) = -4.06%



0 dB = 9.62 W/kg = 9.83 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1120

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.02 \text{ S/m}$; $\epsilon_r = 36.954$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-26-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(4.17, 4.17, 4.17); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5600 MHz System Verification at 17.0 dBm (50 mW)

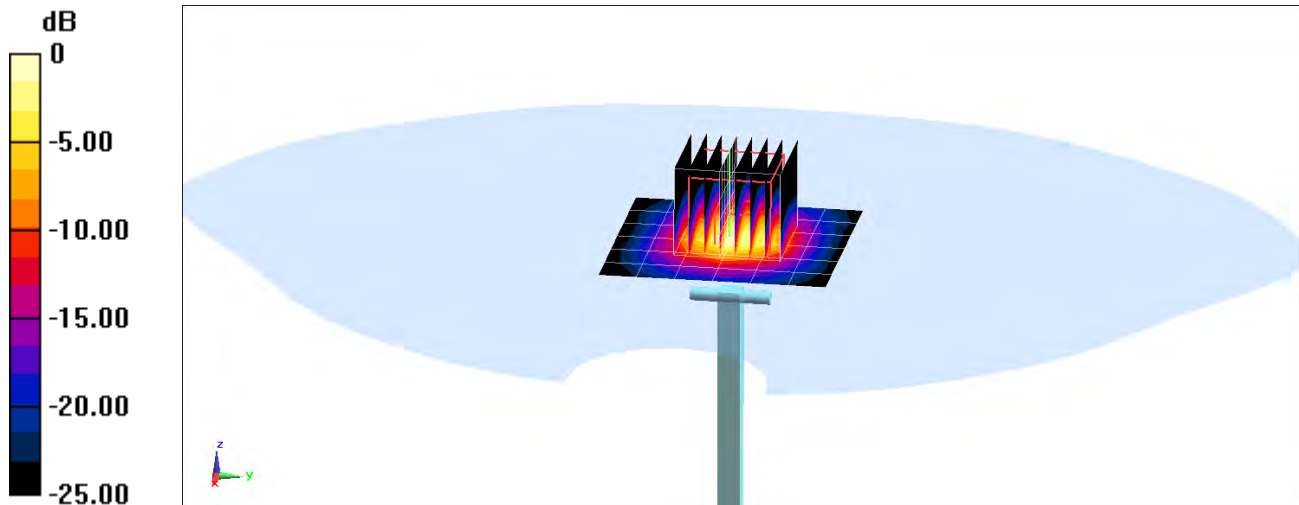
Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.3 W/kg

SAR(1 g) = 4.27 W/kg

Deviation(1 g) = 0.83%



0 dB = 10.4 W/kg = 10.17 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1120

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1
Medium: 5GHz Head Medium parameters used (interpolated):
 $f = 5750 \text{ MHz}$; $\sigma = 5.194 \text{ S/m}$; $\epsilon_r = 36.774$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-26-2018; Ambient Temp: 21.5°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN3589; ConvF(4.42, 4.42, 4.42); Calibrated: 1/16/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1322; Calibrated: 7/13/2017
Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5750 MHz System Verification at 17.0 dBm (50 mW)

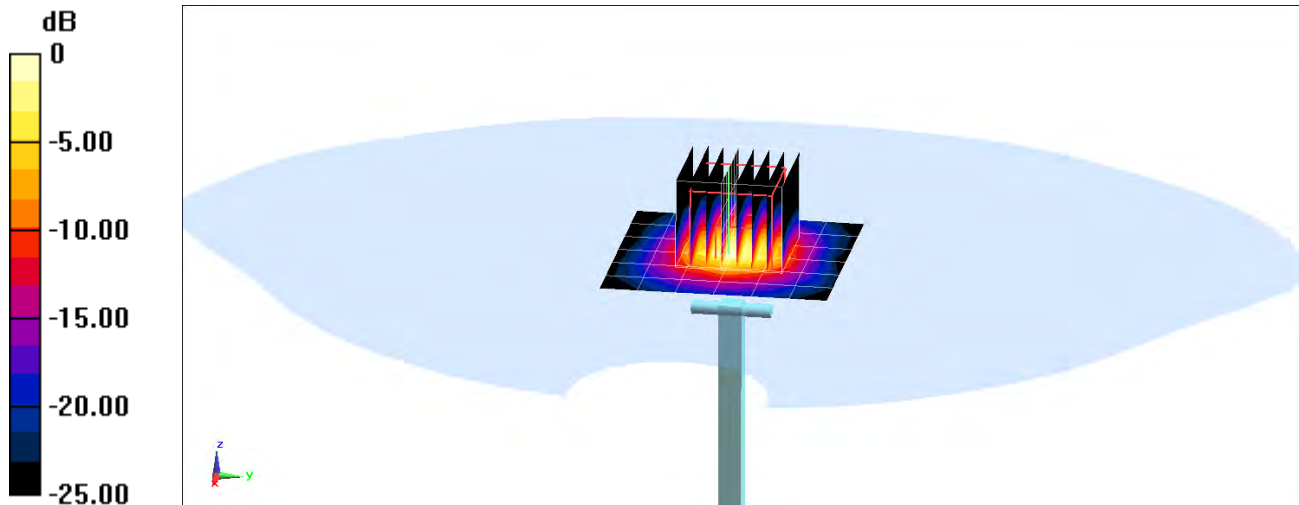
Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 3.9 W/kg

Deviation(1 g) = -3.70%



0 dB = 9.45 W/kg = 9.75 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161

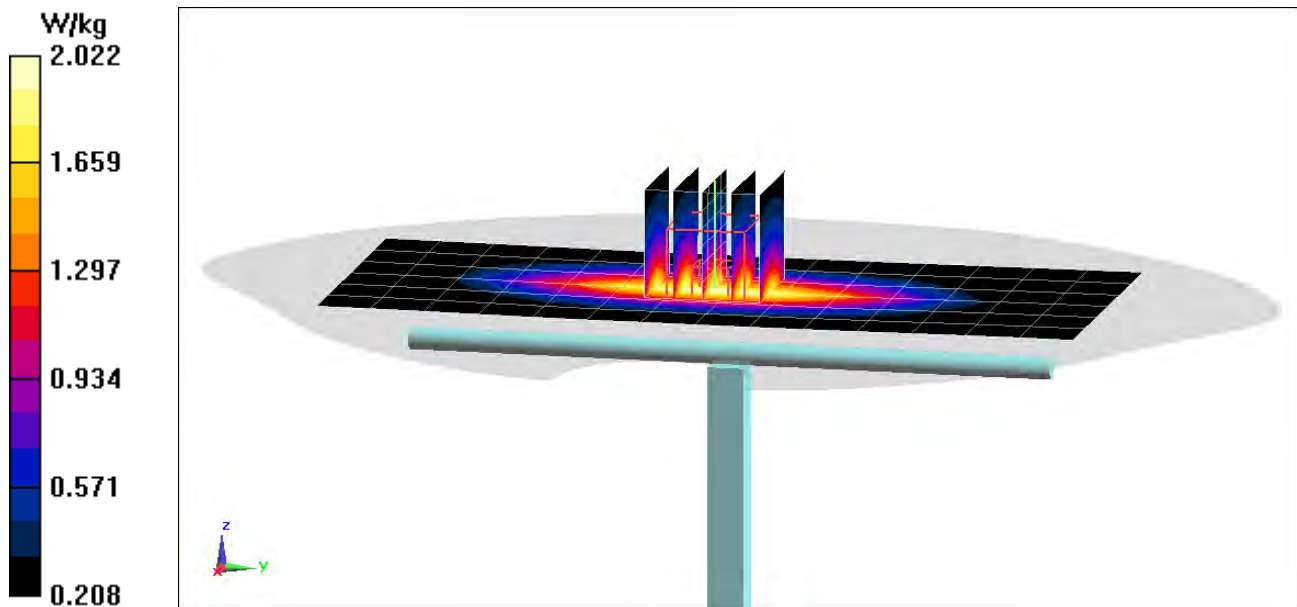
Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium: 750 Body Medium parameters used (interpolated):
 $f = 750 \text{ MHz}$; $\sigma = 0.968 \text{ S/m}$; $\epsilon_r = 56.605$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-29-2018; Ambient Temp: 22.8°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3287; ConvF(6.71, 6.71, 6.71); Calibrated: 9/18/2017;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1333; Calibrated: 6/21/2017
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1692
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

750 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 2.54 W/kg
SAR(1 g) = 1.74 W/kg
Deviation(1 g) = 3.20%



PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.958 \text{ S/m}$; $\epsilon_r = 52.853$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-22-2018; Ambient Temp: 21.3°C; Tissue Temp: 20.7°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

835 MHz System Verification at 23.0 dBm (200 mW)

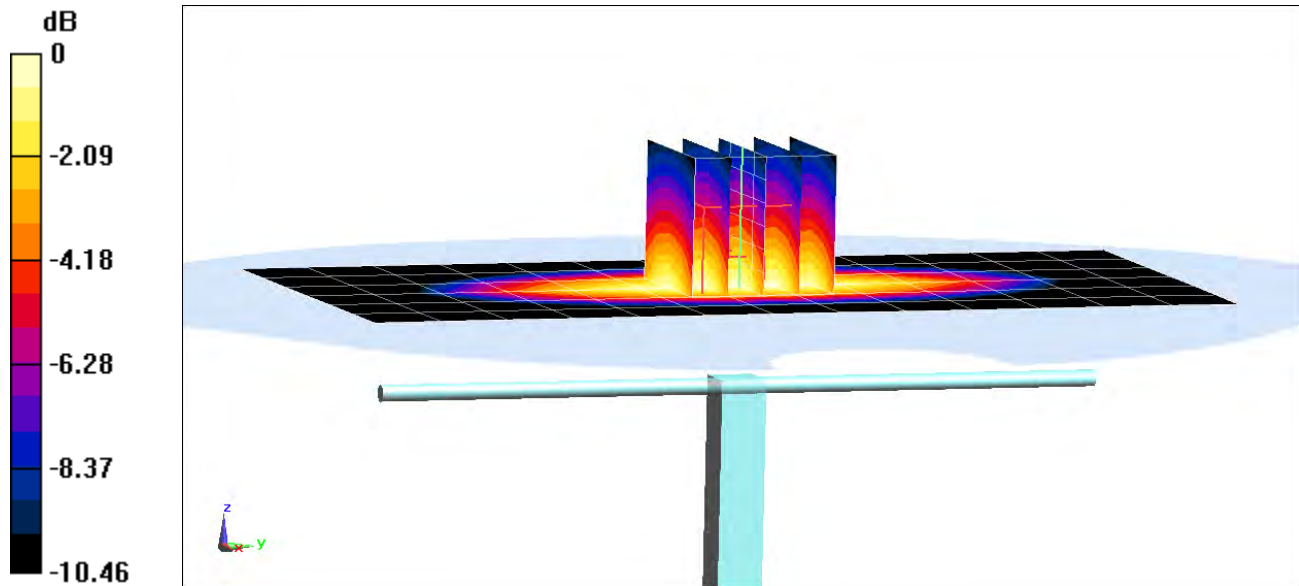
Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.79 W/kg

SAR(1 g) = 1.92 W/kg

Deviation(1 g) = -1.13%



0 dB = 2.24 W/kg = 3.50 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.514 \text{ S/m}$; $\epsilon_r = 50.923$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-23-2018; Ambient Temp: 23.2°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)

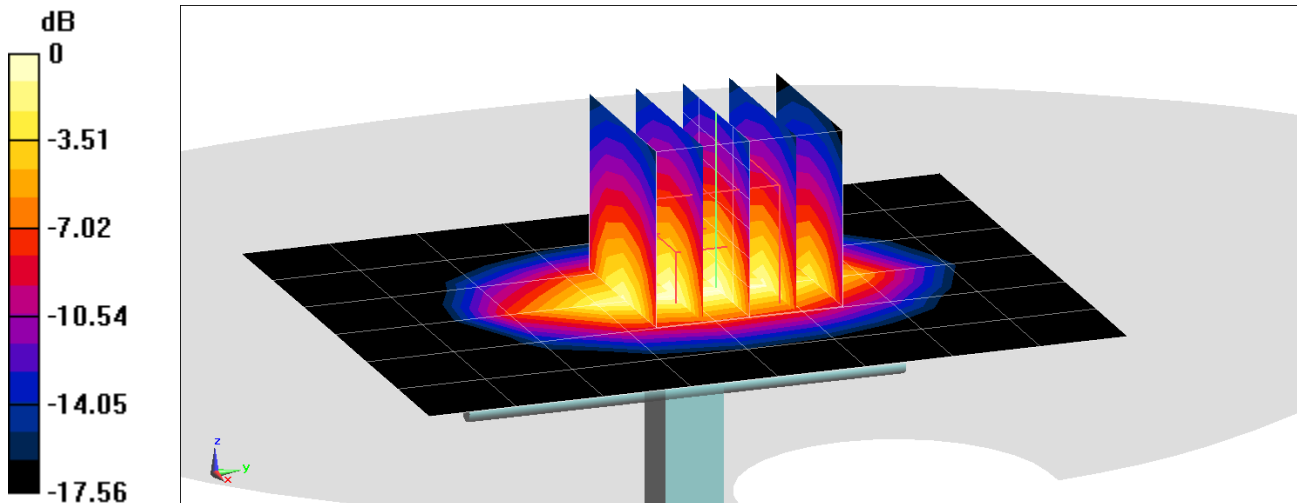
Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.14 W/kg

SAR(1 g) = 3.97 W/kg

Deviation(1 g) = 7.30%



0 dB = 5.96 W/kg = 7.75 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150

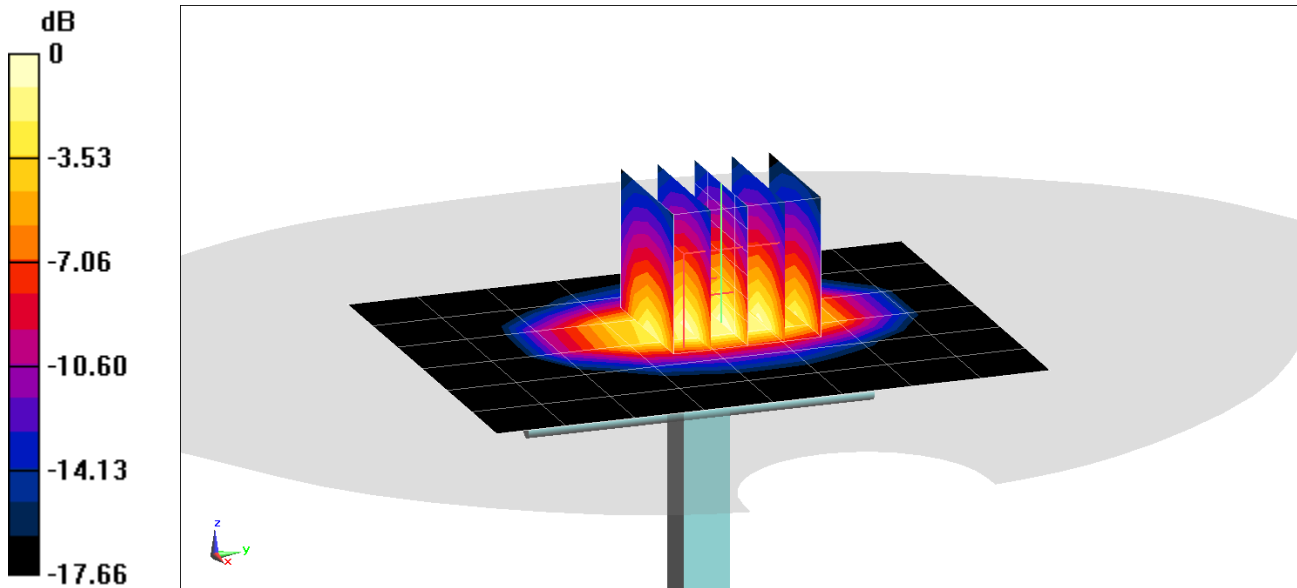
Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used:
 $f = 1750 \text{ MHz}$; $\sigma = 1.527 \text{ S/m}$; $\epsilon_r = 51.137$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-26-2018; Ambient Temp: 22.0°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017
Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1750 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 7.06 W/kg
SAR(10 g) = 2.07 W/kg
Deviation(10 g) = 6.15%



0 dB = 5.82 W/kg = 7.65 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

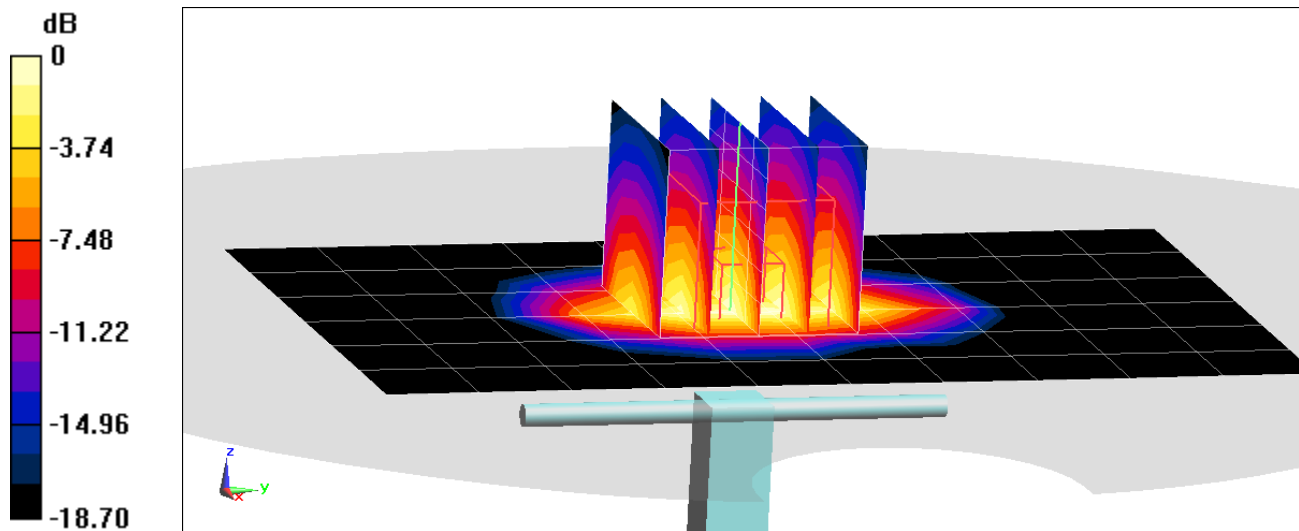
Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used (interpolated):
 $f = 1900 \text{ MHz}$; $\sigma = 1.579 \text{ S/m}$; $\epsilon_r = 52.572$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-24-2018; Ambient Temp: 22.0°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn665; Calibrated: 2/15/2018
Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Peak SAR (extrapolated) = 7.89 W/kg
SAR(1 g) = 4.25 W/kg; SAR(10 g) = 2.18 W/kg
Deviation(1 g) = 7.32%; Deviation(10 g) = 4.31%



0 dB = 6.61 W/kg = 8.20 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: 1900 Body Medium parameters used (interpolated):
 $f = 1900 \text{ MHz}$; $\sigma = 1.578 \text{ S/m}$; $\epsilon_r = 54.022$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

1900 MHz System Verification at 20.0 dBm (100 mW)

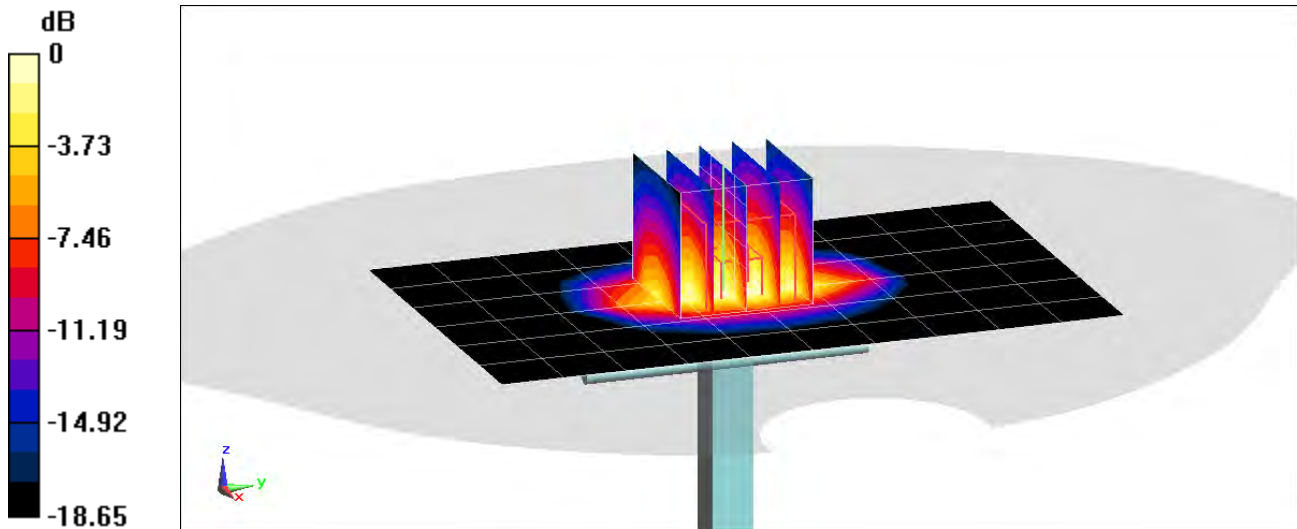
Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.84 W/kg

SAR(10 g) = 2.19 W/kg

Deviation(10 g) = 4.78%



0 dB = 6.57 W/kg = 8.18 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: 2450 Body Medium parameters used:
 $f = 2450 \text{ MHz}$; $\sigma = 2.047 \text{ S/m}$; $\epsilon_r = 51.075$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-31-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7406; ConvF(7.6, 7.6, 7.6); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)

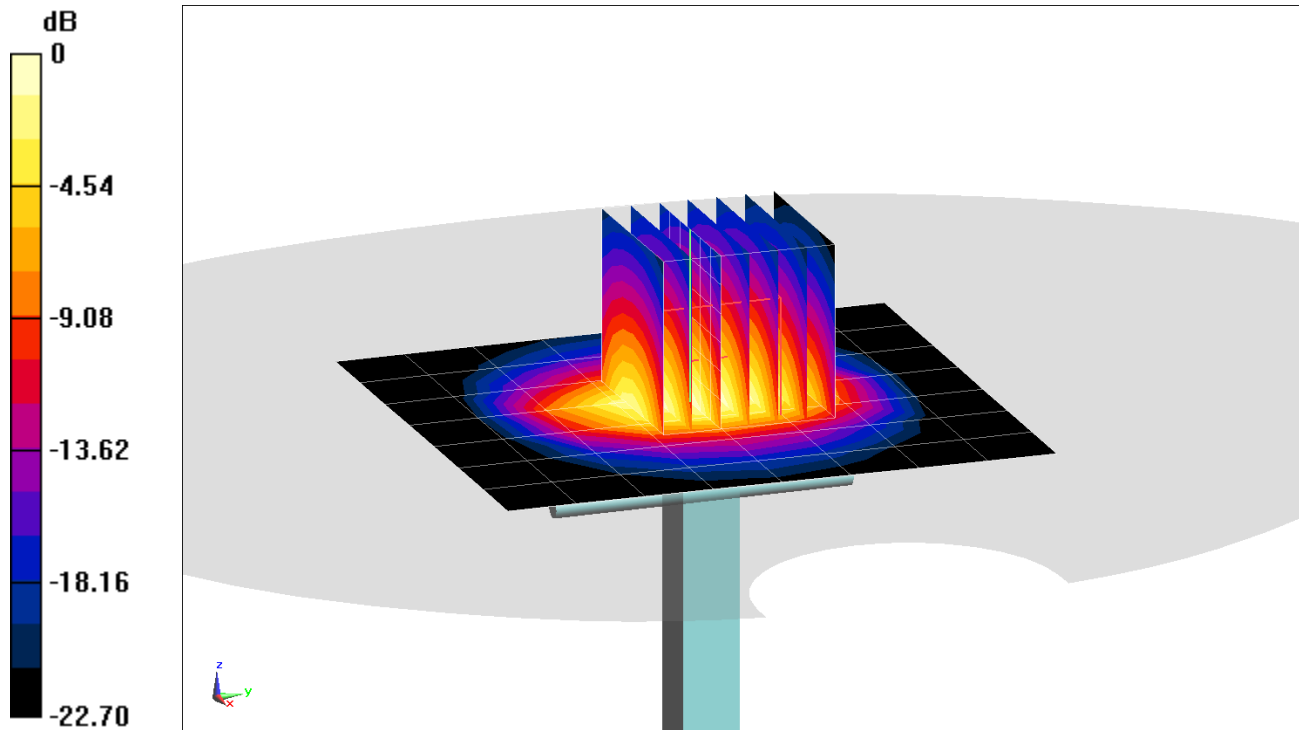
Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 4.95 W/kg; SAR(10 g) = 2.28 W/kg

Deviation(1 g) = -3.13%; Deviation(10 g) = -5.79%



0 dB = 8.24 W/kg = 9.16 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

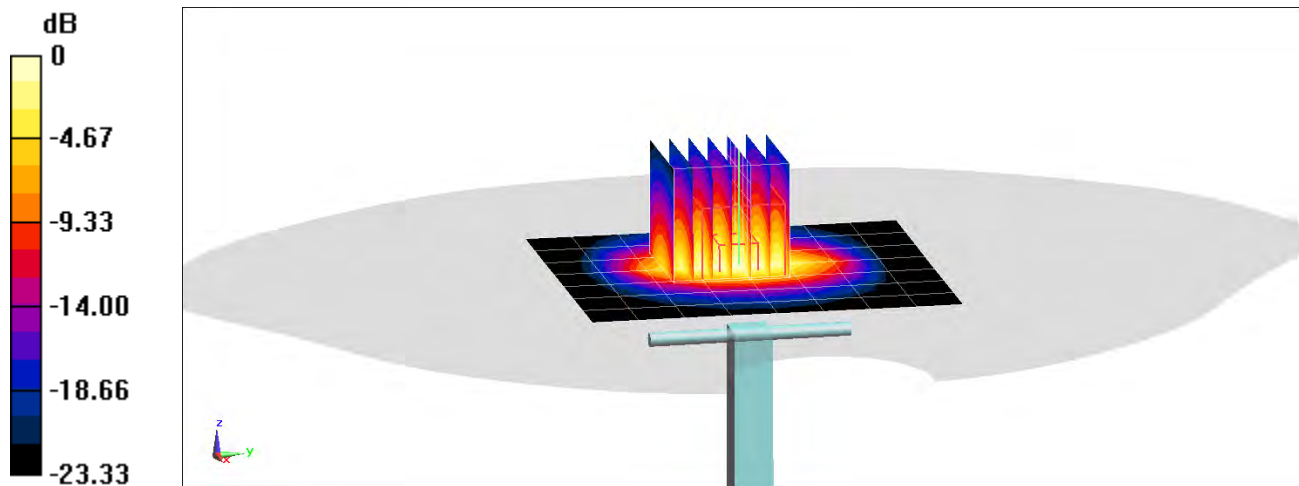
Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: 2450 Body Medium parameters used:
 $f = 2450 \text{ MHz}$; $\sigma = 2.043 \text{ S/m}$; $\epsilon_r = 51.13$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-03-2018; Ambient Temp: 22.4°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51); Calibrated: 3/13/2018;
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1368; Calibrated: 3/7/2018
Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2450 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Peak SAR (extrapolated) = 10.5 W/kg
SAR(1 g) = 5.05 W/kg
Deviation(1 g) = -1.17%



0 dB = 6.67 W/kg = 8.24 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126

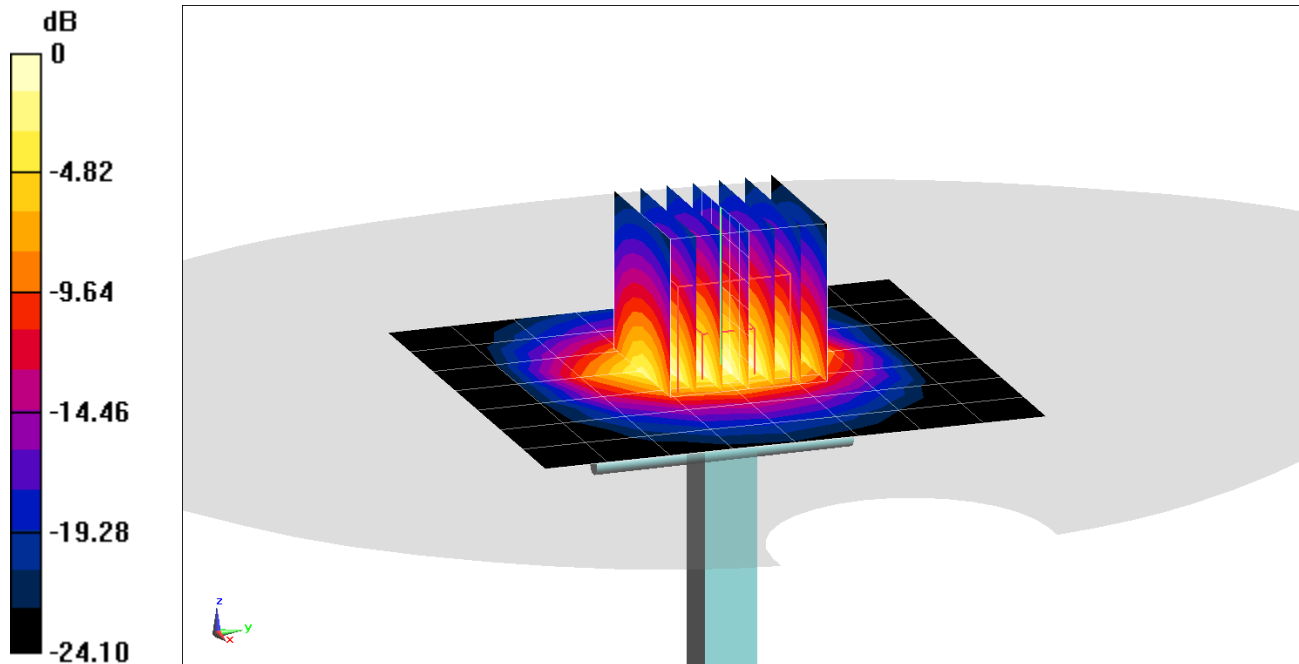
Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1
Medium: 2600 Body Medium parameters used:
 $f = 2600 \text{ MHz}$; $\sigma = 2.229 \text{ S/m}$; $\epsilon_r = 50.657$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-31-2018; Ambient Temp: 21.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7406; ConvF(7.31, 7.31, 7.31); Calibrated: 4/18/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/11/2017
Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

2600 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Peak SAR (extrapolated) = 11.5 W/kg
SAR(1 g) = 5.25 W/kg; SAR(10g) = 2.33 W/kg
Deviation(1 g) = -3.31%; Deviation(10 g) = -4.51%



PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1
Medium: 5 GHz Body Medium parameters used (interpolated):
 $f = 5250 \text{ MHz}$; $\sigma = 5.488 \text{ S/m}$; $\epsilon_r = 47.204$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2018; Ambient Temp: 22.5°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7308; ConvF(4.84, 4.84, 4.84); Calibrated: 8/16/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5250 MHz System Verification at 17.0 dBm (50 mW)

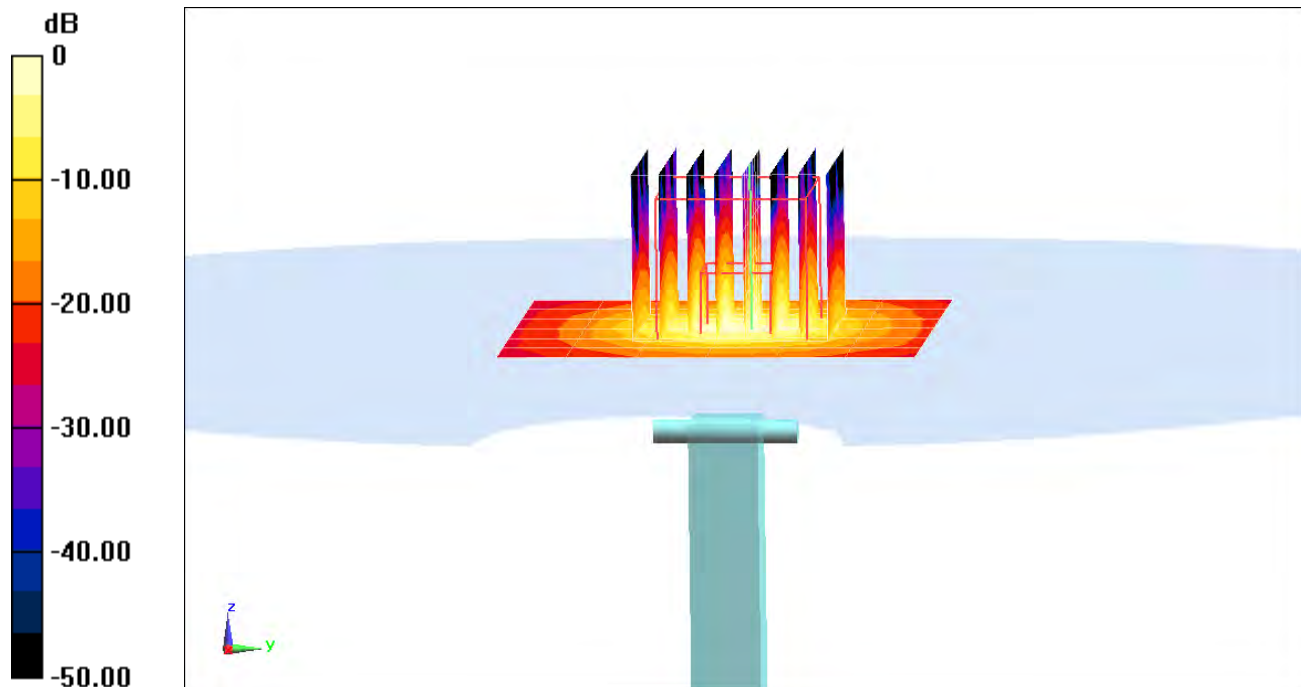
Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 3.60 W/kg; SAR(10 g) = 1.01 W/kg

Deviation(1 g) = -6.37%; Deviation(10 g) = -6.05%



0 dB = 8.82 W/kg = 9.45 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5600$ MHz; $\sigma = 5.955$ S/m; $\epsilon_r = 46.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2018; Ambient Temp: 22.5°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7308; ConvF(4.23, 4.23, 4.23); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5600 MHz System Verification at 17.0 dBm (50 mW)

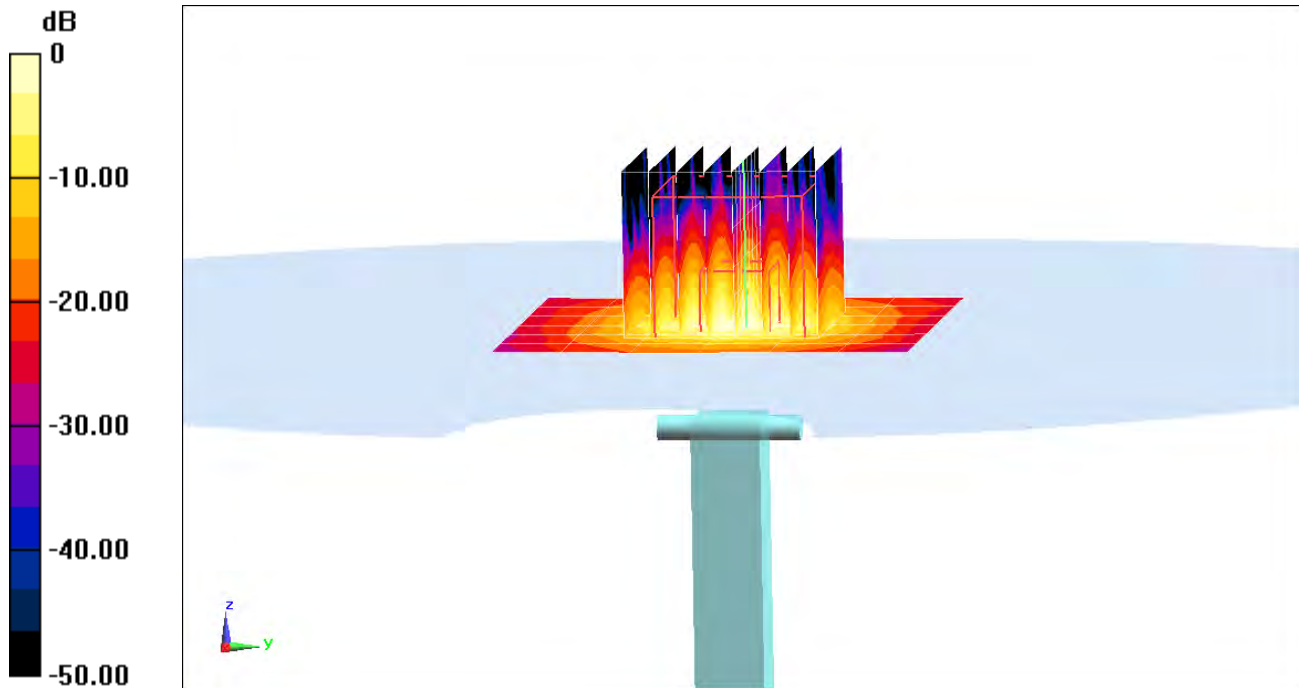
Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 3.80 W/kg; SAR(10 g) = 1.06 W/kg

Deviation(1 g) = -3.18%; Deviation(10 g) = -4.07%



0 dB = 9.85 W/kg = 9.93 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1
Medium: 5 GHz Body Medium parameters used (interpolated):
 $f = 5750 \text{ MHz}$; $\sigma = 6.16 \text{ S/m}$; $\epsilon_r = 46.355$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04-02-2018; Ambient Temp: 22.5°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7308; ConvF(4.5, 4.5, 4.5); Calibrated: 8/16/2017;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646
Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

5750 MHz System Verification at 17.0 dBm (50 mW)

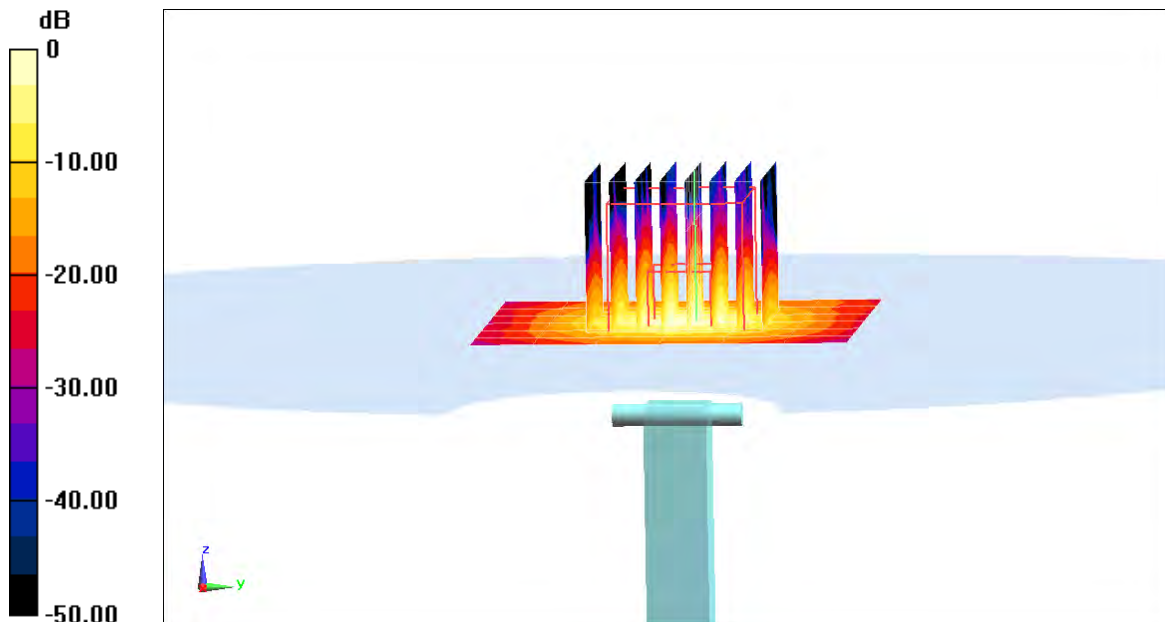
Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.3 W/kg

SAR(1 g) = 3.60 W/kg

Deviation(1 g) = -6.61%



0 dB = 8.90 W/kg = 9.49 dBW/kg

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1161_Jul16**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1161**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 13, 2016**

✓ PM
8/9/16
Extended
7/2017
SC ✓

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7349_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Claudio Leubler** (Name) / **Laboratory Technician** (Function) / *[Signature]* (Signature)

Approved by: **Katja Pokovic** (Name) / **Technical Manager** (Function) / *[Signature]* (Signature)

Issued: July 13, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.9 \pm 6 %	0.91 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.17 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.1 \pm 6 %	0.99 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.43 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.41 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.53 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.6 Ω - 0.9 j Ω
Return Loss	- 25.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.2 Ω - 4.0 j Ω
Return Loss	- 28.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.033 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 19, 2015

DASY5 Validation Report for Head TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1161

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.07, 10.07, 10.07); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

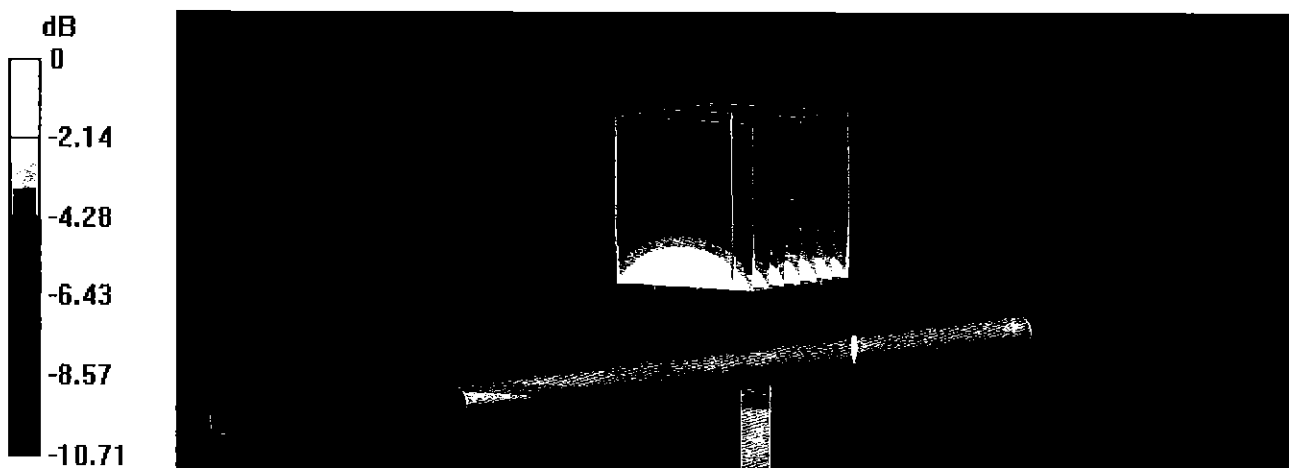
Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.07 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 2.80 W/kg




0 dB = 2.80 W/kg = 4.47 dBW/kg

Impedance Measurement Plot for Head TSL

13 Jul 2016 09:55:53
 [CH1] S11 1 U FS 1: 55.615 Ω -949.22 m Ω 223.56 pF 750.000 000 MHz

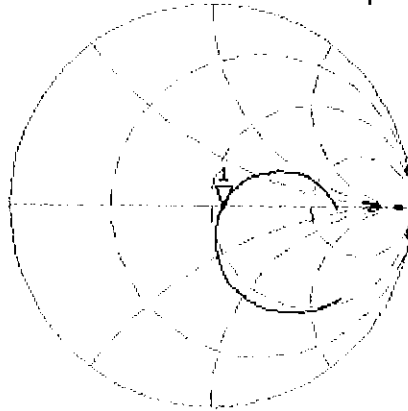*
 De1
 CA



Avg
 16

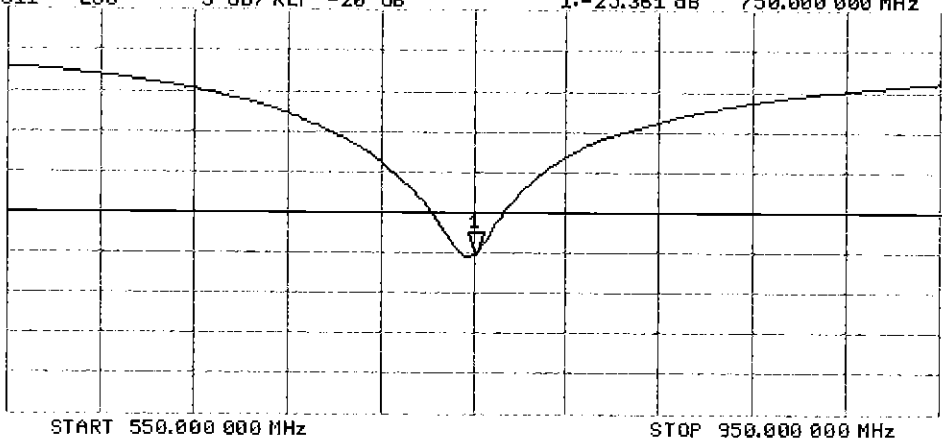
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.361 dB 750.000 000 MHz

CA

Avg
 16

H1d



DASY5 Validation Report for Body TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1161

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 55.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.99, 9.99, 9.99); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/ $P_{in}=250 \text{ mW}$, $d=15\text{mm}$ /Zoom Scan (7x7x7)/Cube 0:

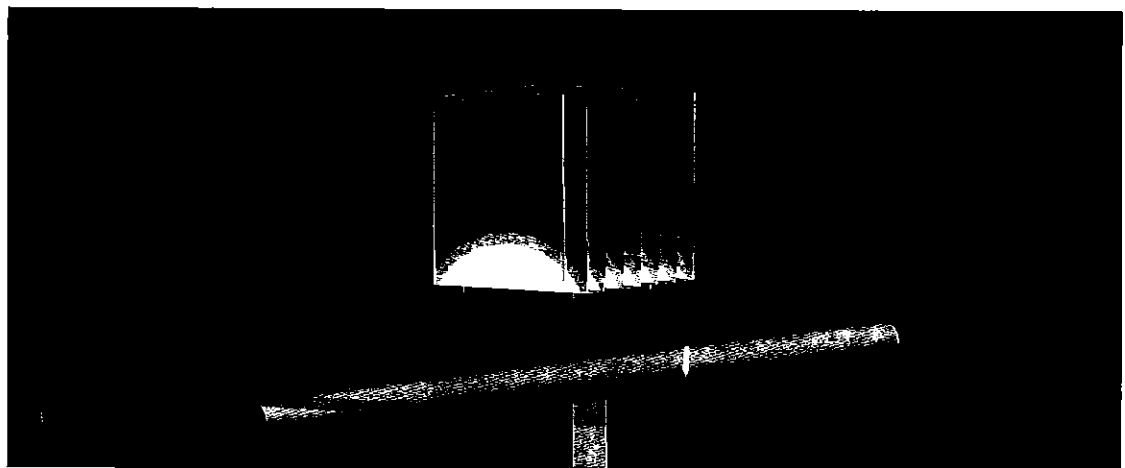

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.33 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.41 W/kg

Maximum value of SAR (measured) = 2.87 W/kg





0 dB = 2.87 W/kg = 4.58 dBW/kg

Impedance Measurement Plot for Body TSL

13 Jul 2016 13:16:34
[CH1] S11 1 U FS 1: 50.244 Ω -3.9707 Ω 53.443 pF 750.000 000 MHz

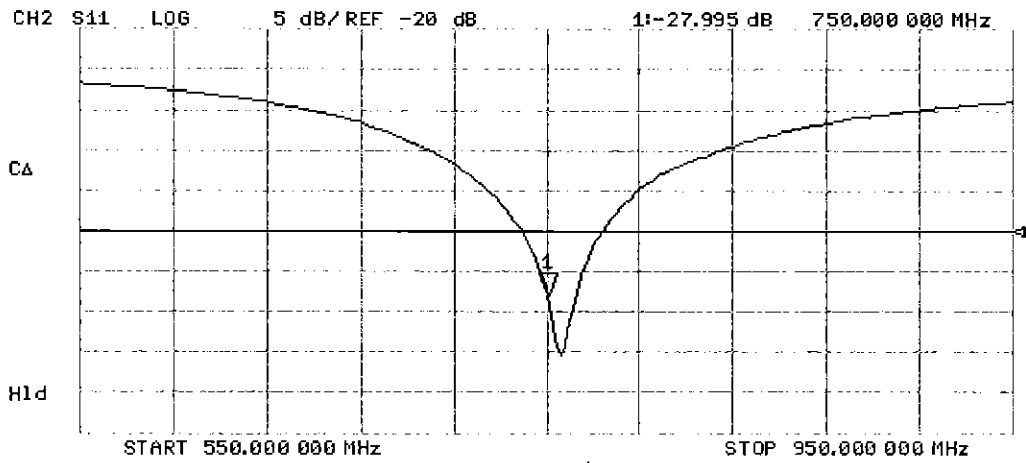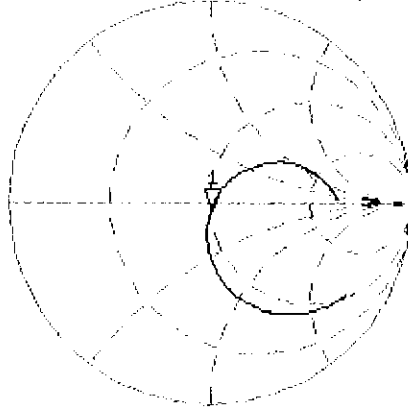*
Del
CA
Avg
16
H1d



Certification of Calibration

Object: D750V3 – SN: 1161

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.

Calibration date: July 12, 2017

Description: SAR Validation Dipole at 750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Agilent	8753ES	S-Parameter Network Analyzer	10/26/2016	Annual	10/26/2017	US39170118
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/8/2017	Annual	3/8/2018	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/14/2017	Annual	6/14/2018	1334
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2017	Annual	5/10/2018	1070
SPEAG	ES3DV3	SAR Probe	11/15/2016	Annual	11/15/2017	3334
SPEAG	ES3DV3	SAR Probe	3/14/2017	Annual	3/14/2018	3319
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1207364
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1339018
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Agilent	N5182A	MXG Vector Signal Generator	2/28/2017	Annual	2/28/2018	MY47420800
Seekonk	NC-100	Torque Wrench	11/6/2015	Biennial	11/6/2017	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALBFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 23.0 dBm	Measured Head SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
7/13/2016	7/12/2017	1.033	1.63	1.65	0.98%	1.08	1.09	1.11%	55.6	54.5	1.1	-0.9	-4.0	3.1	-25.4	-24.8	2.40%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
7/13/2016	7/12/2017	1.033	1.69	1.75	3.80%	1.11	1.17	5.79%	50.2	48.0	2.2	-4.0	-6.9	2.9	-28.0	-23.9	14.60%	PASS

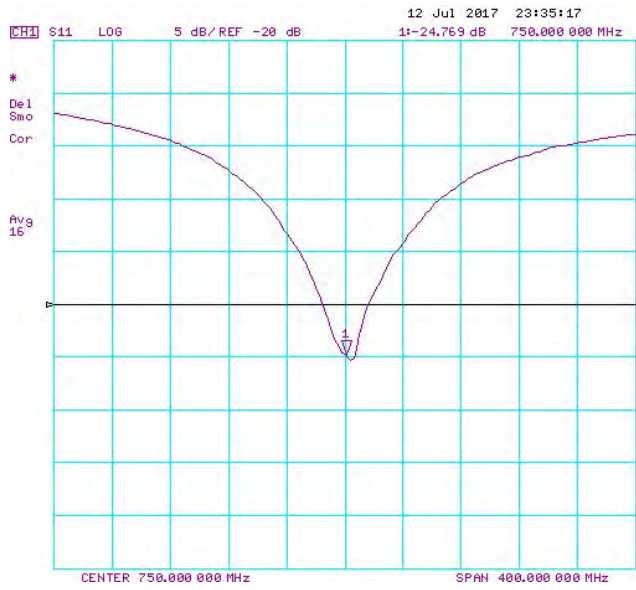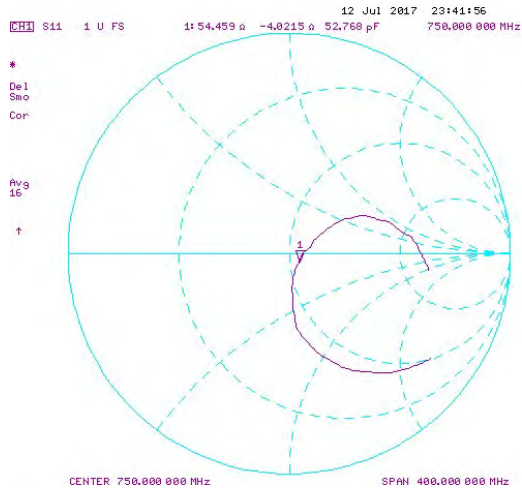Impedance & Return-Loss Measurement Plot for Head TSL



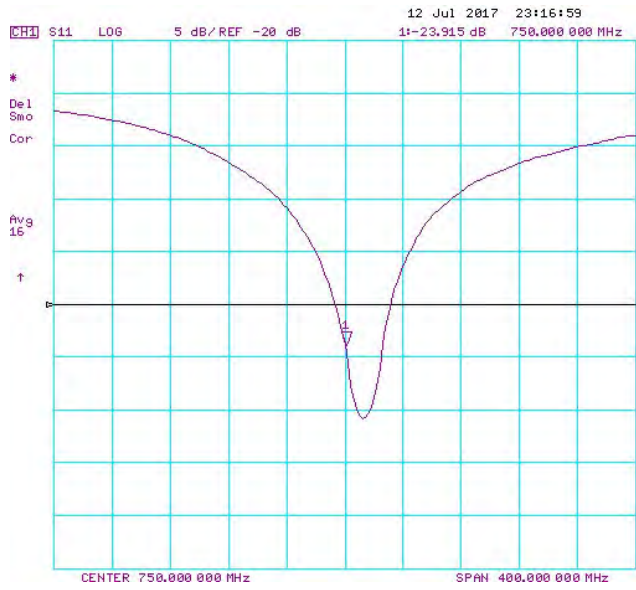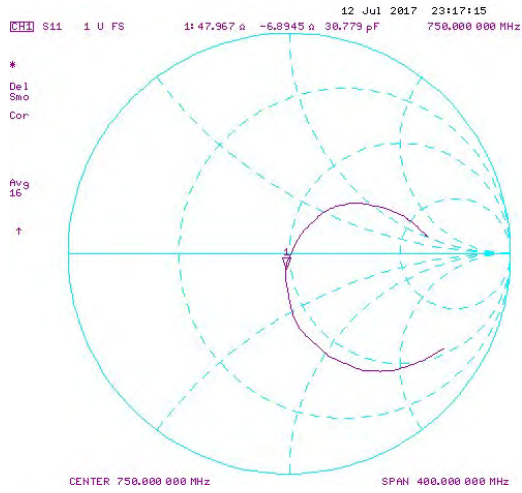Impedance & Return-Loss Measurement Plot for Body TSL





Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d132_Jan18**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d132**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 15, 2018**

BNV
01-25-2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Leif Klysner** Name: **Leif Klysner** Function: **Laboratory Technician**

Signature: *Leif Klysner*

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature: *Katja Pokovic*

Issued: January 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5.0 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.7 \pm 6 %	0.92 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.39 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.36 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.10 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	54.8 \pm 6 %	0.99 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.71 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.62 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.39 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.8 Ω - 2.9 j Ω
Return Loss	- 29.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.4 Ω - 5.7 j Ω
Return Loss	- 23.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.386 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

Appendix (Additional assessments outside the scope of SCS 0108)

Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

SAR result with SAM Head (Top)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.41 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.58 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.21 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Mouth)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.69 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.64 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.45 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Neck)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.22 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.25 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Ear)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.03 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	7.96 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg ± 16.9 % (k=2)

DASY5 Validation Report for Head TSL

Date: 08.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/ $P_{in}=250 \text{ mW}$, $d=10\text{mm}$ /Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 63.23 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 2.39 W/kg ; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 3.22 W/kg



0 dB = $3.22 \text{ W/kg} = 5.08 \text{ dBW/kg}$

Impedance Measurement Plot for Head TSL

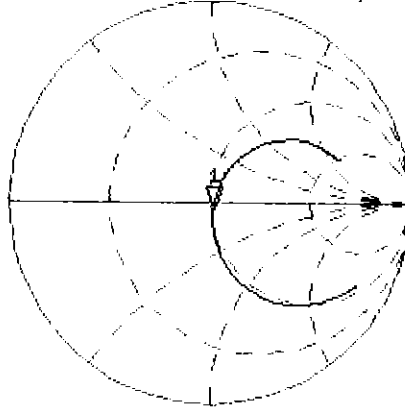
8 Jan 2018 16:29:07

CH1 S11 1 U FS

1: 51.768 Ω -2.8984 Ω 65.761 pF

835.000 000 MHz

*
De1
Cor



Avg
16

H1d

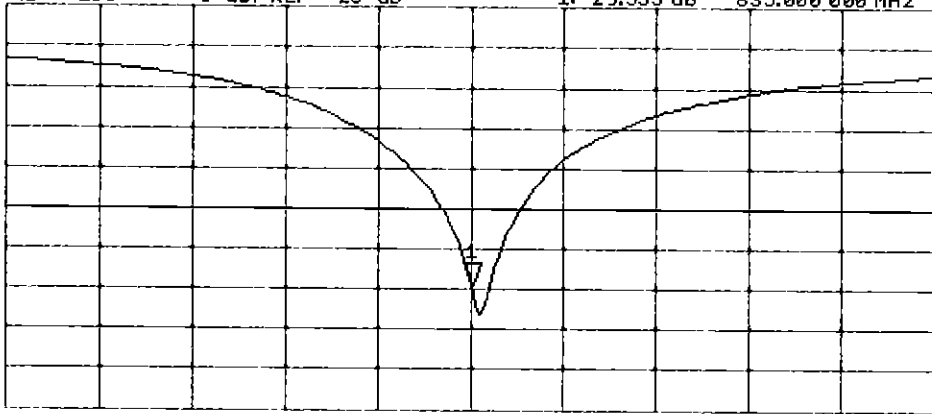
CH2 S11 LOG

5 dB/REF -20 dB

1:-29.535 dB

835.000 000 MHz

Cor



Avg
16

H1d

START 835.000 000 MHz

STOP 1 035.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 08.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.05, 10.05, 10.05); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

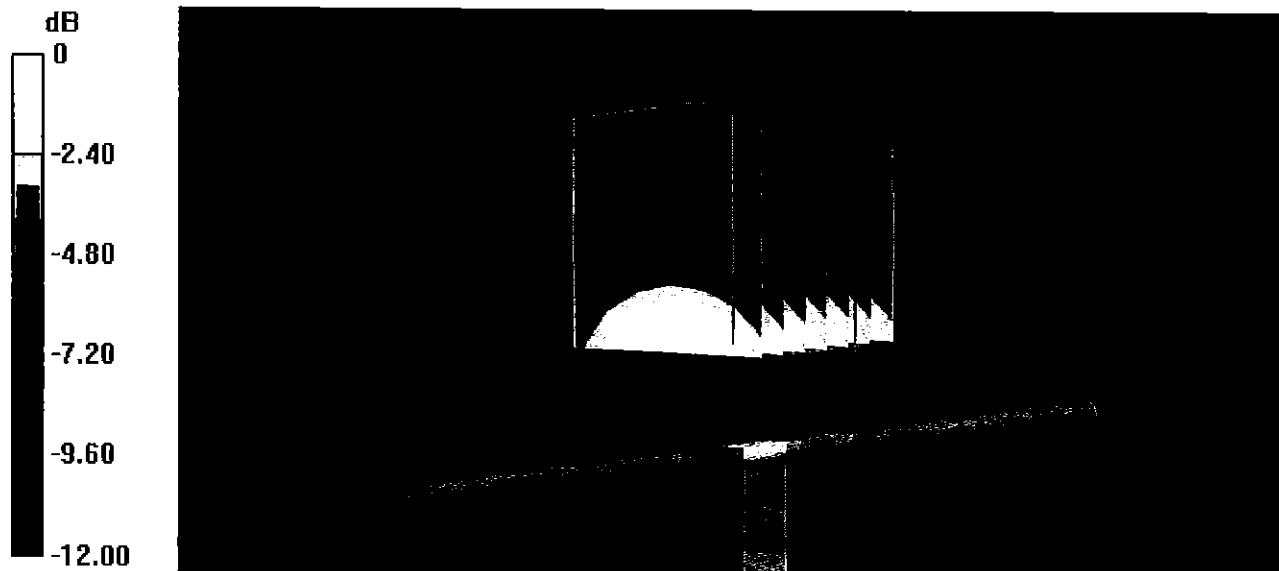
Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.55 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.62 W/kg

Maximum value of SAR (measured) = 3.24 W/kg




0 dB = 3.24 W/kg = 5.11 dBW/kg

Impedance Measurement Plot for Body TSL

8 Jan 2018 16:27:09
[CH1] S11 1 U FS 1: 47.447 Ω -5.6680 Ω 33.628 pF 835.000 000 MHz

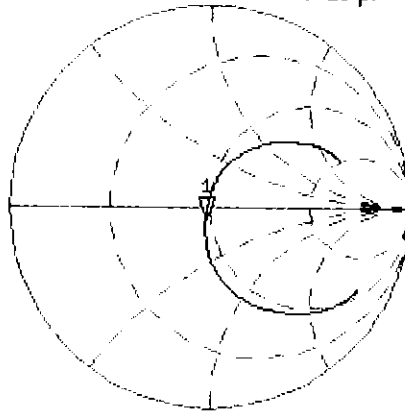*
De1
Cor



Avg
16

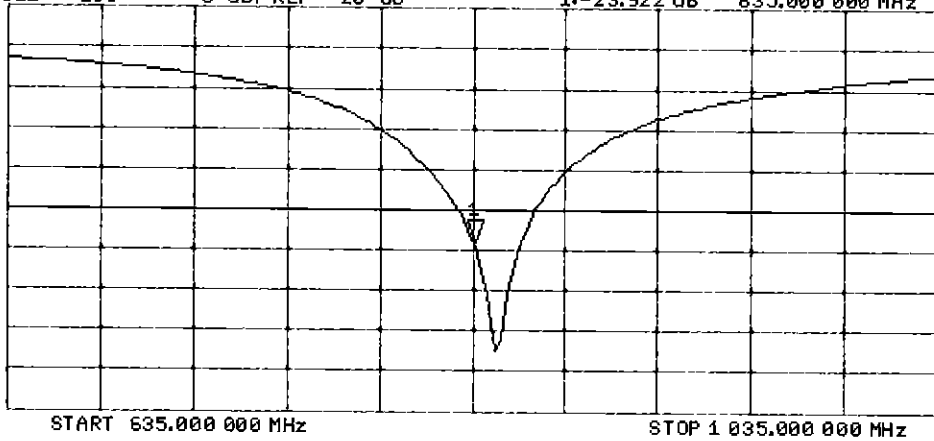
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-23.922 dB 835.000 000 MHz

Cor

Avg
16

H1d



DASY5 Validation Report for SAM Head

Date: 15.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 44.1$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

SAM Head/Top/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.00 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.58 W/kg

Maximum value of SAR (measured) = 3.16 W/kg

SAM Head/Mouth/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.99 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.64 W/kg

Maximum value of SAR (measured) = 3.19 W/kg

SAM Head/Neck/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.20 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 3.04 W/kg

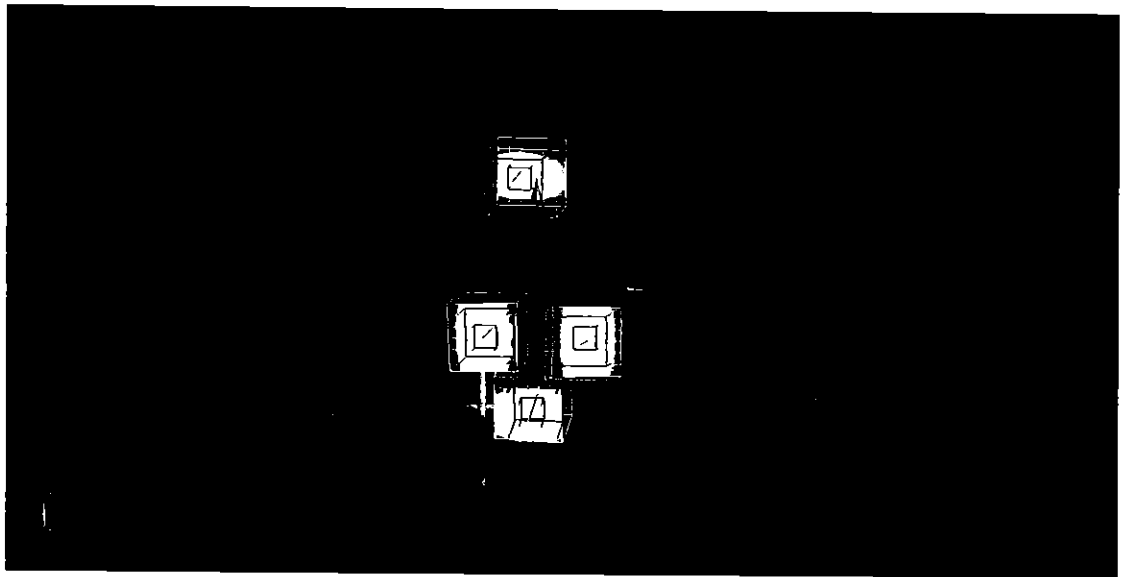

SAM Head/Ear/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.03 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 2.61 W/kg



0 dB = 2.61 W/kg = 4.17 dBW/kg



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1750V2-1148_May17**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN:1148**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **May 09, 2017**

*BN ✓
05-23-2017*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-Dec-16 (No. EX3-7349_Dec16)	Dec-17
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: May 11, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.0 ± 6 %	1.36 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.11 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.4 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.83 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.3 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.7 ± 6 %	1.47 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.0 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.93 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.8 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.8 Ω - 0.7 j Ω
Return Loss	- 42.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.7 Ω - 0.5 j Ω
Return Loss	- 26.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.223 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 30, 2014

DASY5 Validation Report for Head TSL

Date: 09.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1148

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.46, 8.46, 8.46); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

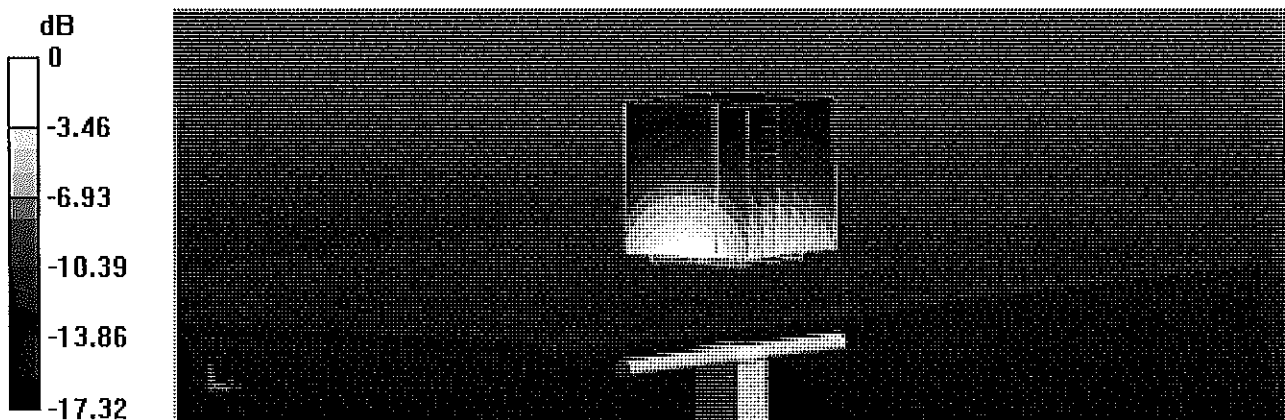
Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.4 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 9.11 W/kg; SAR(10 g) = 4.83 W/kg

Maximum value of SAR (measured) = 13.9 W/kg




0 dB = 13.9 W/kg = 11.43 dBW/kg

Impedance Measurement Plot for Head TSL

9 May 2017 14:43:11


CH1 S11 1 U FS 1: 49.777 Ω -683.59 m Ω 133.04 pF 1 750.000 000 MHz

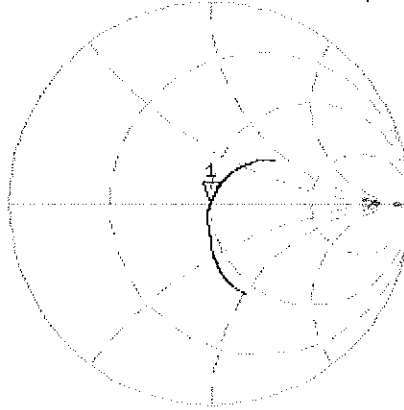*
De1
CA
AVG
16
H1d



CH2 S11 LOG 5 dB/REF -20 dB 1: -42.893 dB 1 750.000 000 MHz

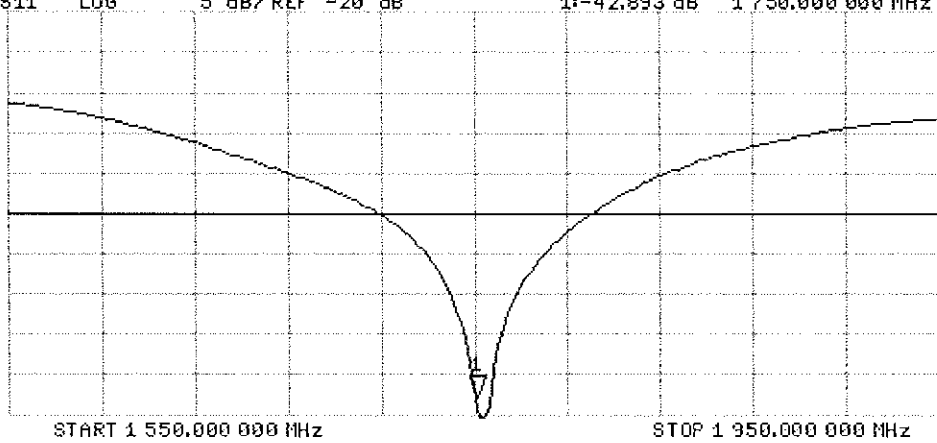CA
AVG
16
H1d



DASY5 Validation Report for Body TSL

Date: 09.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1148

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.25, 8.25, 8.25); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

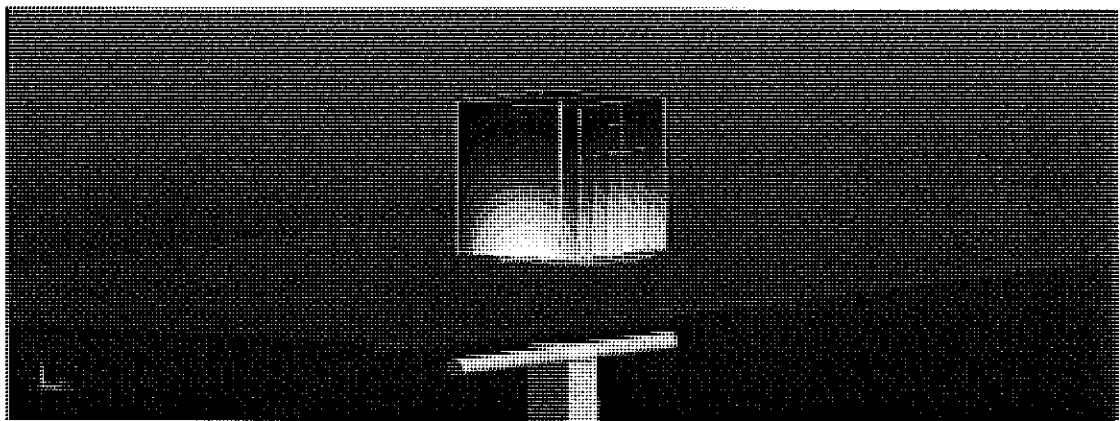

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.49 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 15.9 W/kg

SAR(1 g) = 9.17 W/kg; SAR(10 g) = 4.93 W/kg

Maximum value of SAR (measured) = 13.1 W/kg




0 dB = 13.1 W/kg = 11.17 dBW/kg

Impedance Measurement Plot for Body TSL

9 May 2017 14:42:25


[CH1] S11 1 U FS 1: 45.707 Ω -513.67 $m\Omega$ 177.05 pF 1 750.000 000 MHz

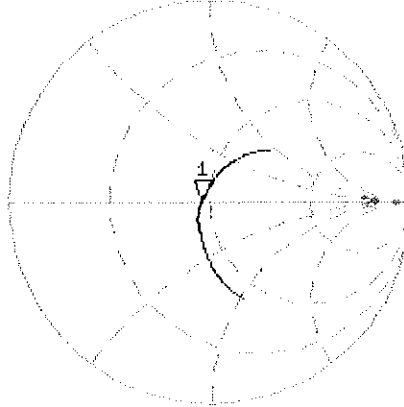*
De1
CA
Avg
16
H1d



CH2 S11 LOG 5 dB/REF -20 dB 1:-26.901 dB 1 750.000 000 MHz

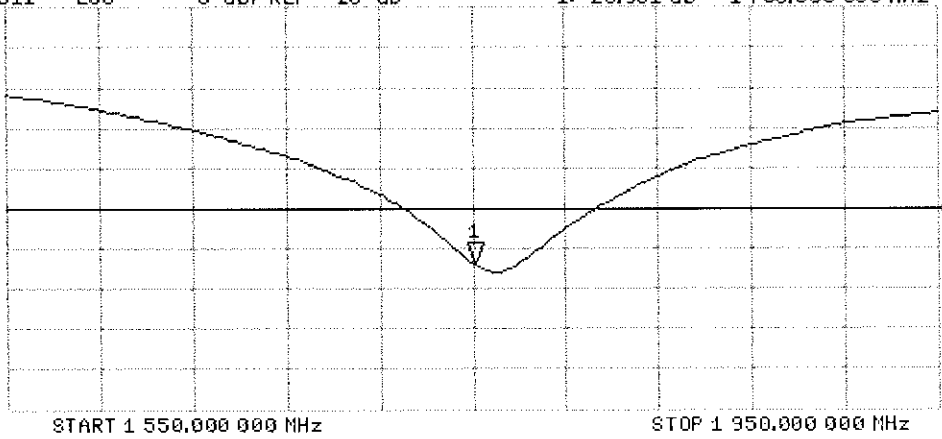CA
Avg
16
H1d





Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1900V2-5d080_Jul16**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d080**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 08, 2016**

*BNV
7/16/2016
Extended
7/20/17
SCV*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7349_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: July 13, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.8 \pm 6 %	1.38 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.76 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	39.3 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.5 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	52.7 \pm 6 %	1.51 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.75 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	39.1 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.17 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.7 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.1 \Omega + 5.3 j\Omega$
Return Loss	- 25.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$47.4 \Omega + 6.8 j\Omega$
Return Loss	- 22.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.192 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 28, 2006

DASY5 Validation Report for Head TSL

Date: 08.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d080

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.99, 7.99, 7.99); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

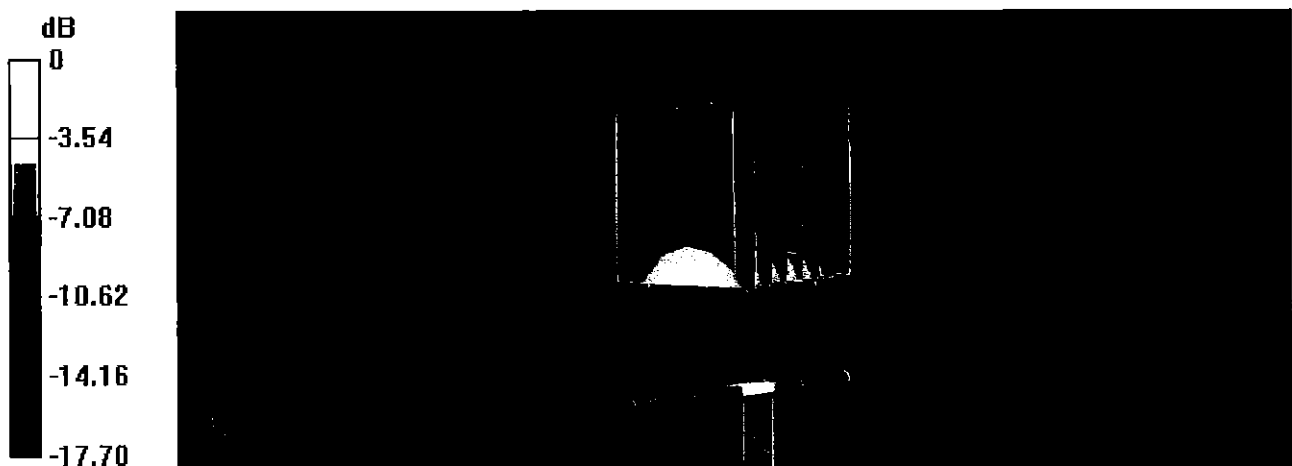
Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.6 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 9.76 W/kg; SAR(10 g) = 5.1 W/kg

Maximum value of SAR (measured) = 15.0 W/kg



0 dB = 15.0 W/kg = 11.76 dBW/kg

Impedance Measurement Plot for Head TSL

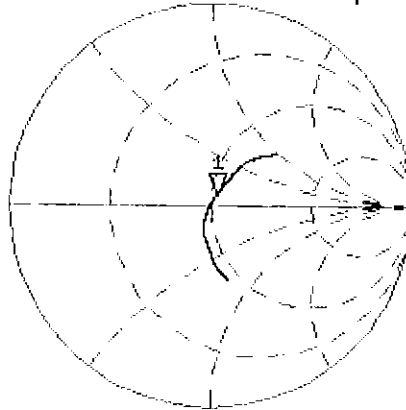
8 Jul 2016 16:18:04

CH1 S11 1 U FS

1: 52.143 Ω 5.2500 Ω 439.78 pF

1 900.000 000 MHz

*
Del
Cor



Avg
16

H1d

CH2 S11 LOG

5 dB/REF -20 dB

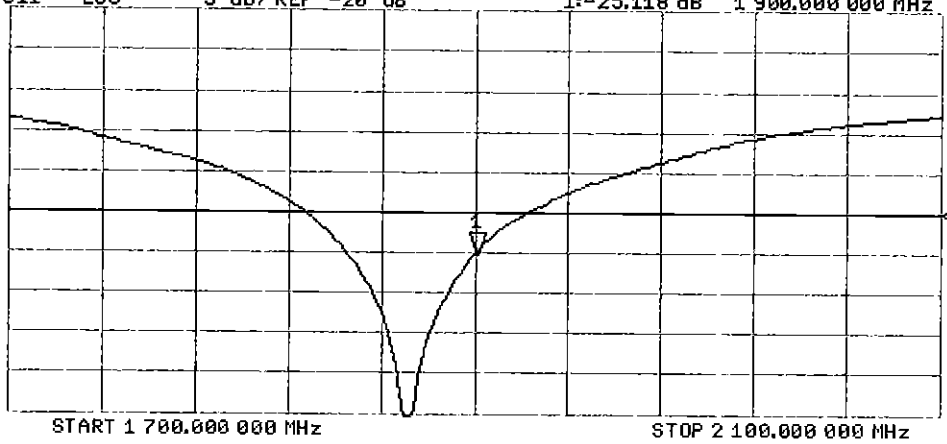
1:-25.118 dB

1 900.000 000 MHz

Cor

Avg
16

H1d



DASY5 Validation Report for Body TSL

Date: 08.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d080

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.03, 8.03, 8.03); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

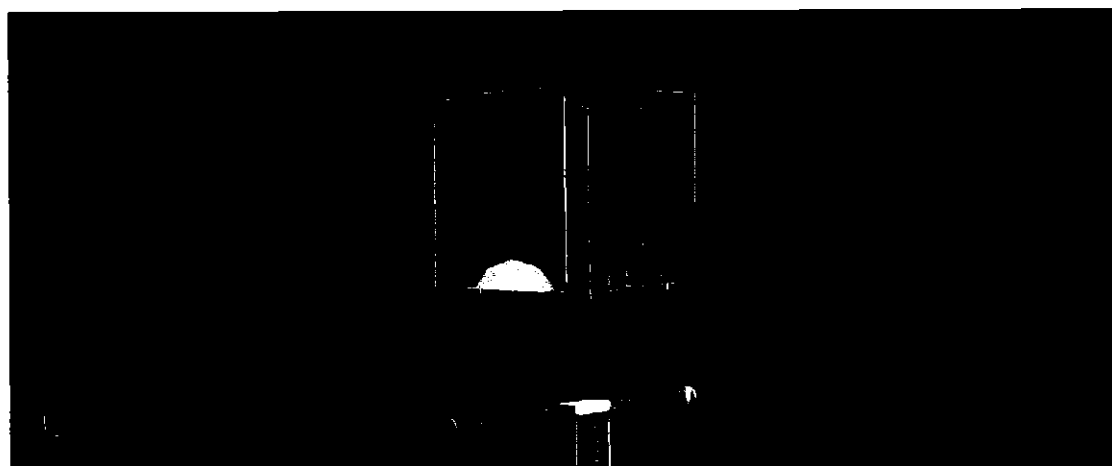

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.1 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.1 W/kg

SAR(1 g) = 9.75 W/kg; SAR(10 g) = 5.17 W/kg

Maximum value of SAR (measured) = 14.7 W/kg



0 dB = 14.7 W/kg = 11.67 dBW/kg

Impedance Measurement Plot for Body TSL

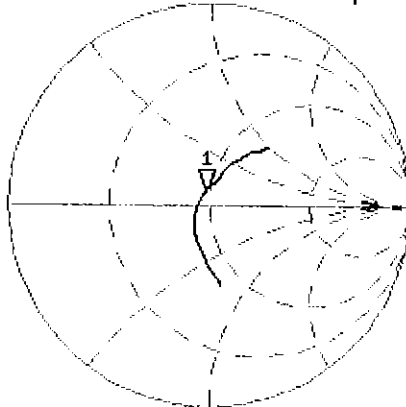
8 Jul 2016 16:16:56

CH1 S11 1 U FS

1: 47.412 Ω 6.7422 Ω 564.78 μH

1 900.000 000 MHz

*
De1
Cor



Avg
16

H1d

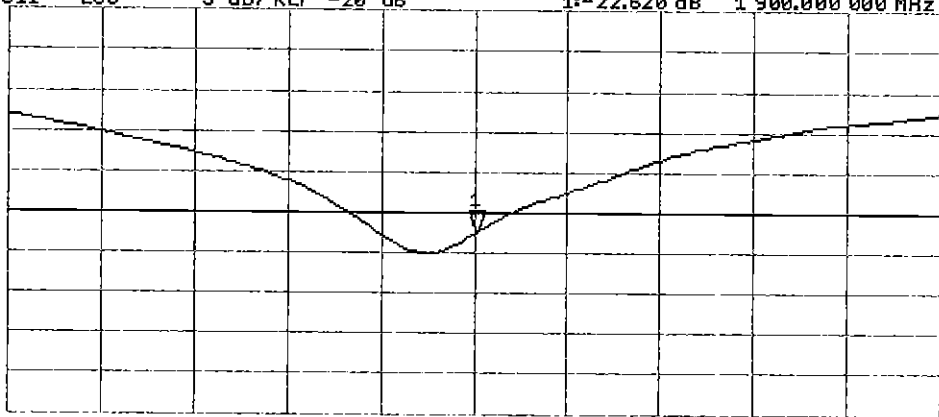
CH2 S11 LOG

5 dB/REF -20 dB

1:-22.620 dB

1 900.000 000 MHz

Cor



Avg
16

H1d

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz

Certification of Calibration

Object: D1900V2 – SN: 5d080

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.

Calibration date: July 06, 2017

Description: SAR Validation Dipole at 1900 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Agilent	8753ES	S-Parameter Network Analyzer	10/26/2016	Annual	10/26/2017	US39170118
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/13/2017	Annual	3/13/2018	1415
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2017	Annual	5/10/2018	1070
SPEAG	ES3DV3	SAR Probe	3/14/2017	Annual	3/14/2018	3209
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1207364
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1339018
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Agilent	N5182A	MXG Vector Signal Generator	2/28/2017	Annual	2/28/2018	MY47420800
Seekonk	NC-100	Torque Wrench	11/6/2015	Biennial	11/6/2017	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALBFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 20.0 dBm	Measured Head SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 20.0 dBm	Measured Head SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
7/8/2016	7/6/2017	1.192	3.93	3.86	-1.78%	2.05	2	-2.44%	52.1	52.9	0.8	5.3	4.7	0.6	-25.1	-25.6	-2.00%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 20.0 dBm	Measured Body SAR (1g) W/kg @ 20.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 20.0 dBm	Measured Body SAR (10g) W/kg @ 20.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
7/8/2016	7/6/2017	1.192	3.91	4.05	3.58%	2.07	2.11	1.93%	47.4	48.5	1.1	6.8	5.1	1.7	-22.6	-25.5	-12.80%	PASS

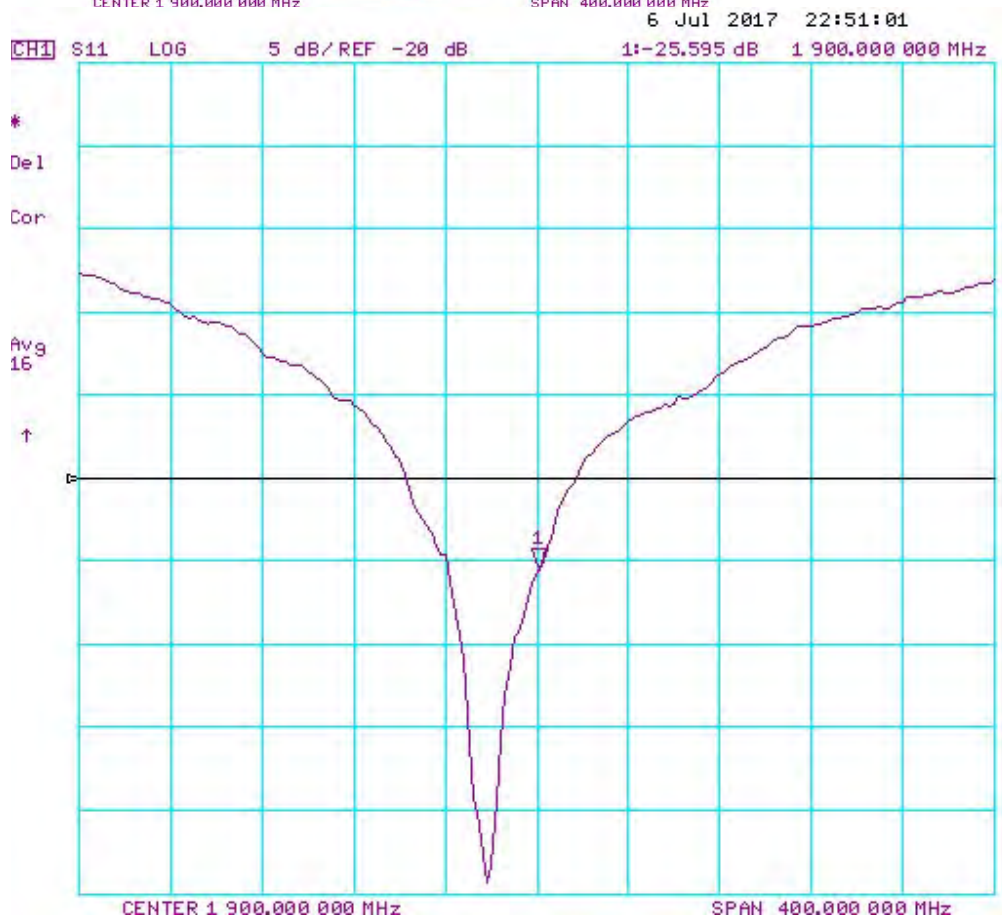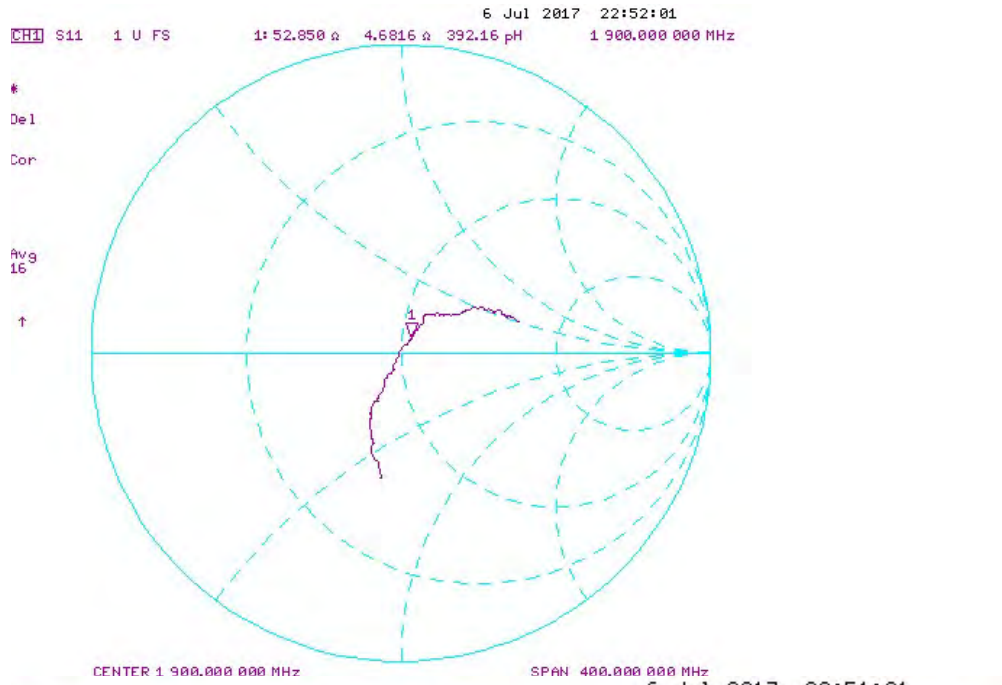Impedance & Return-Loss Measurement Plot for Head TSL



Impedance & Return-Loss Measurement Plot for Body TSL

