


**802.11g\_2 467 MHz**


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
2 483.54 <sup>1)</sup>	V	63.50	27.70	-30.24	-	60.96	74.00	13.04
4 934.53 <sup>1)</sup>	V	53.70	32.77	-45.54	-	40.93	74.00	33.07
7 400.50 <sup>1)</sup>	H	51.70	36.90	-44.16	-	44.44	74.00	29.56
<b>Average Data</b>								
2 483.54	V	52.45	27.70	-30.24	0.40	50.31	54.00	3.69

**Average data**

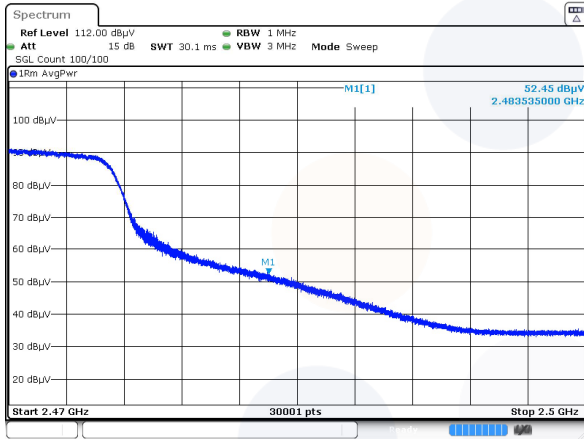


Blank


**Horizontal/Vertical for Band-edge**

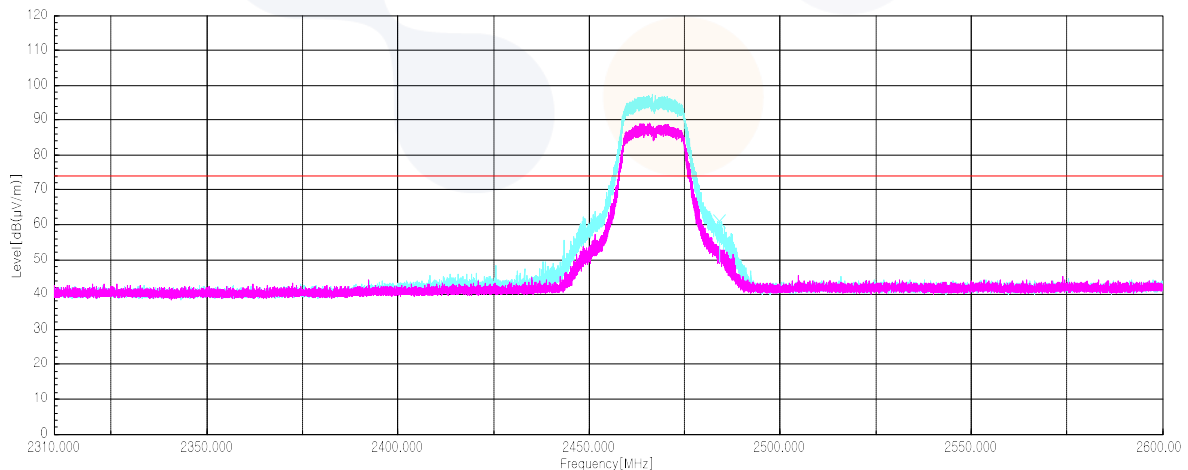

**Horizontal/Vertical for 1 GHz ~ 3.5 GHz**

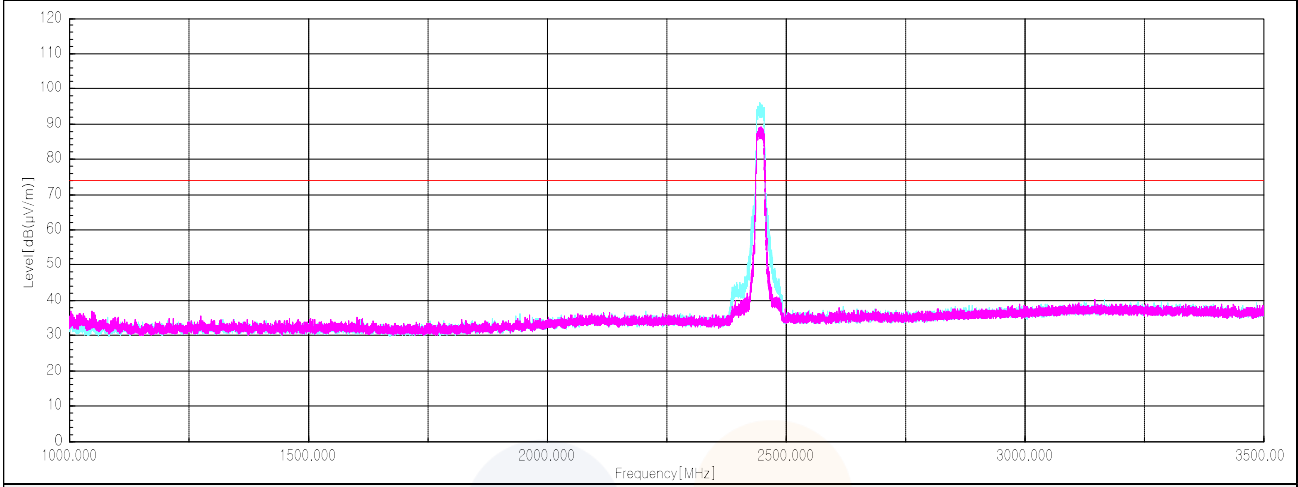


**Horizontal/Vertical for 3.5 GHz ~ 18 GHz**

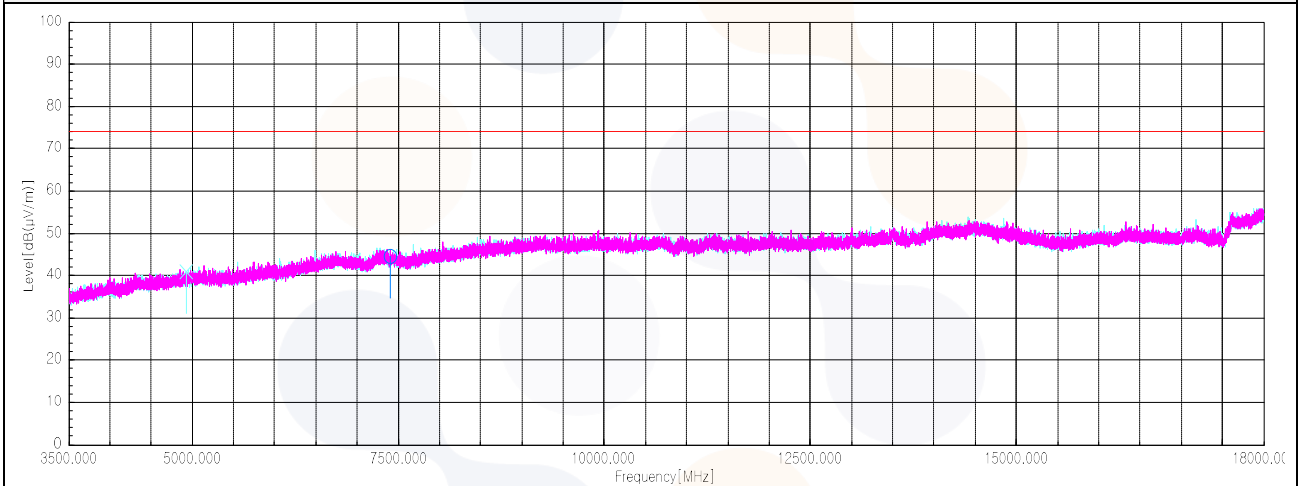

**802.11g\_2 472 MHz**


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
2 483.50 <sup>1)</sup>	V	67.90	27.70	-30.24	-	65.36	74.00	8.64
4 946.13 <sup>1)</sup>	H	53.00	32.79	-45.49	-	40.30	74.00	33.70
7 417.42 <sup>1)</sup>	V	54.30	36.87	-44.13	-	47.04	74.00	26.96
<b>Average Data</b>								
2 483.50 <sup>1)</sup>	V	53.97	27.70	-30.24	0.40	51.83	54.00	2.17

**Average data**

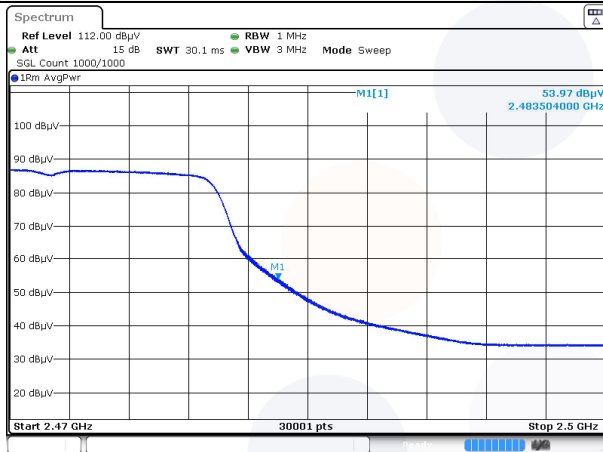


Blank


**Horizontal/Vertical for Band-edge**

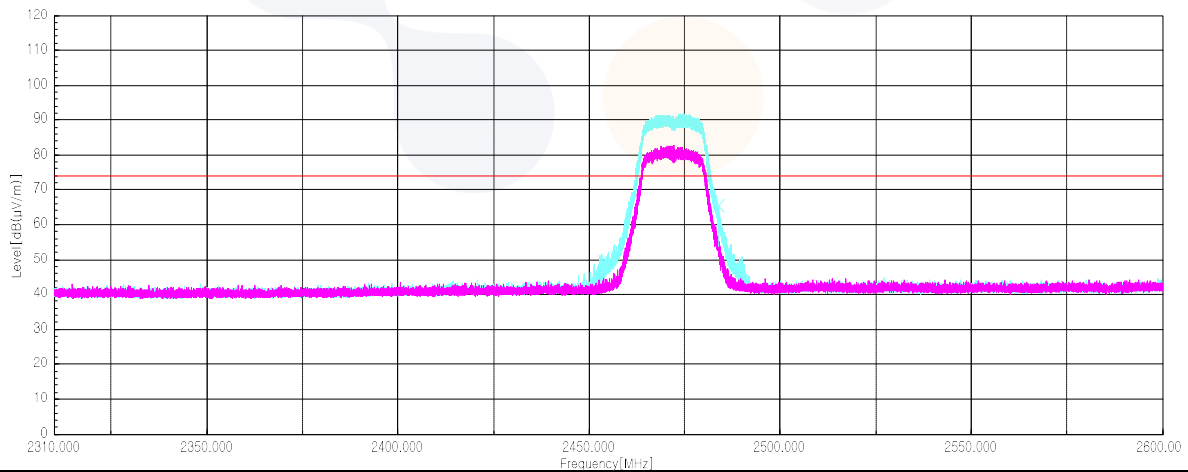

**Horizontal/Vertical for 1 GHz ~ 3.5 GHz**

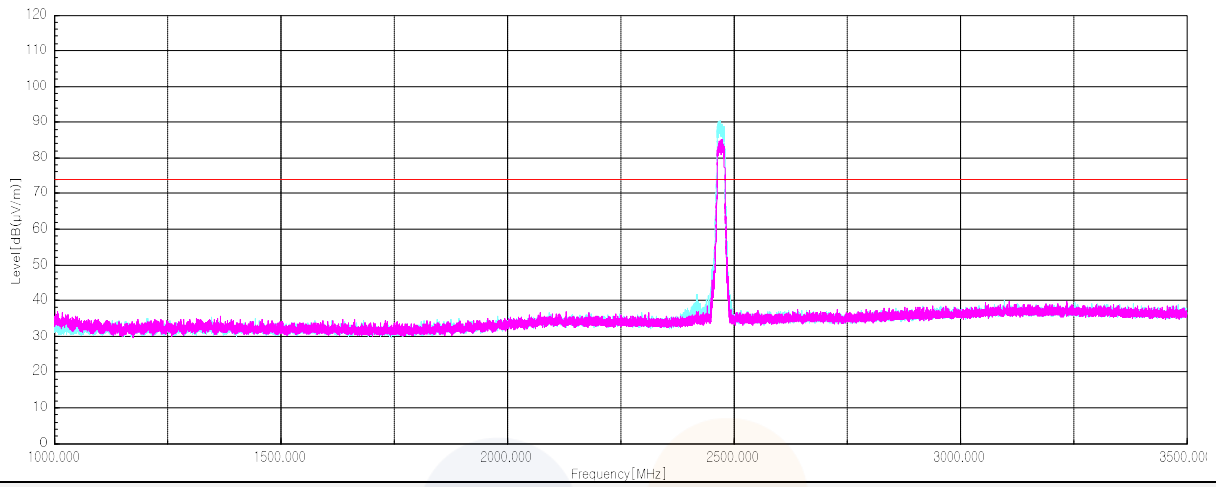



**Horizontal/Vertical for 3.5 GHz ~ 18 GHz**

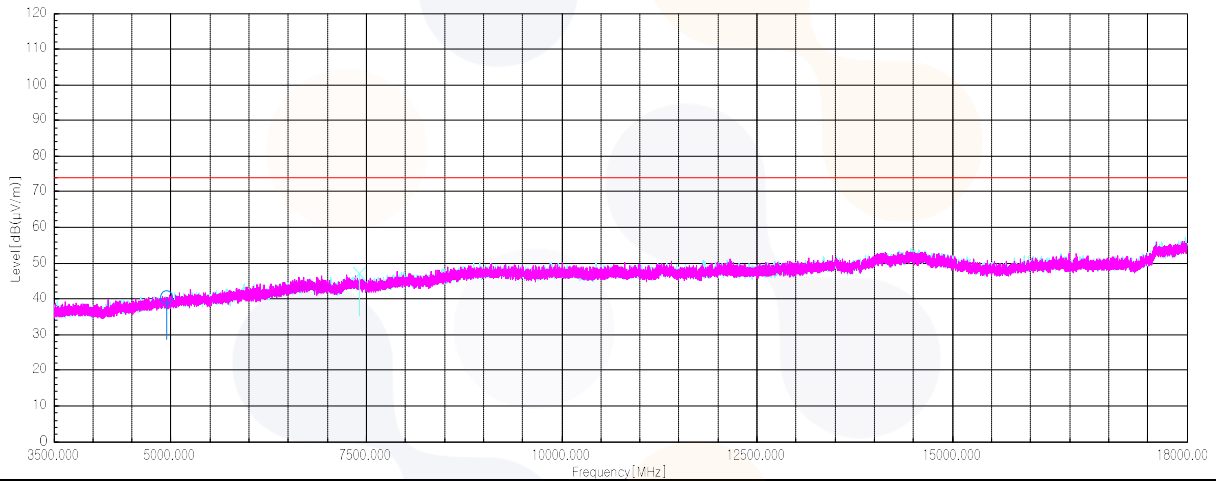


**802.11n HT20\_2 412 MHz**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
<b>Peak data</b>								
2 389.93 <sup>1)</sup>	V	71.50	27.10	-30.39	-	68.21	74.00	5.79
2 483.74 <sup>1)</sup>	V	58.60	27.70	-30.24	-	56.06	74.00	17.94
4 826.75 <sup>1)</sup>	H	53.80	32.46	-46.03	-	40.23	74.00	33.77
7 235.68	H	52.70	37.17	-44.38	-	45.49	74.00	28.51
<b>Average Data</b>								
2 389.93 <sup>1)</sup>	V	53.64	27.10	-30.39	0.43	50.78	54.00	3.22
2 483.74 <sup>1)</sup>	V	44.90	27.70	-30.24	0.43	42.79	54.00	11.21


**Average data**

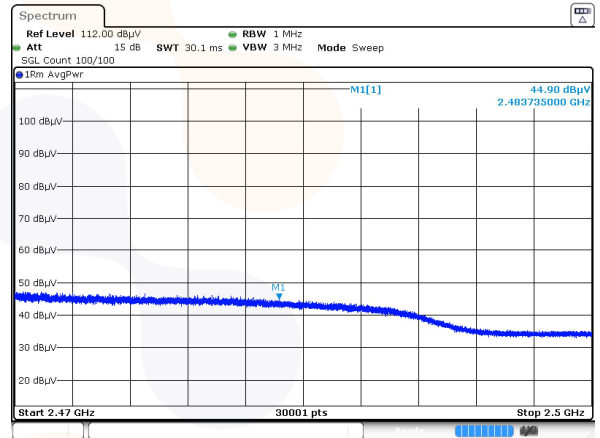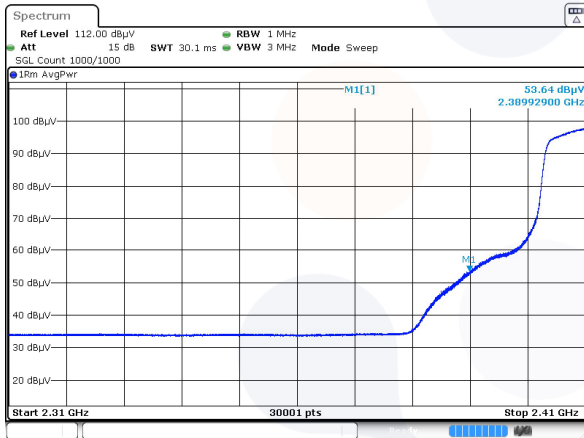


**Horizontal/Vertical for Band-edge**

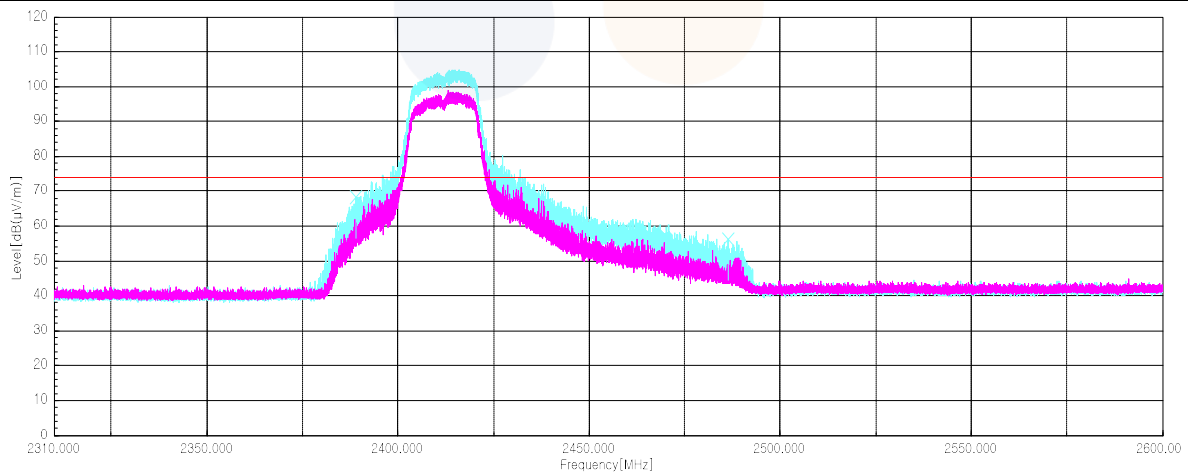

**Horizontal/Vertical for 1 GHz ~ 3.5 GHz**

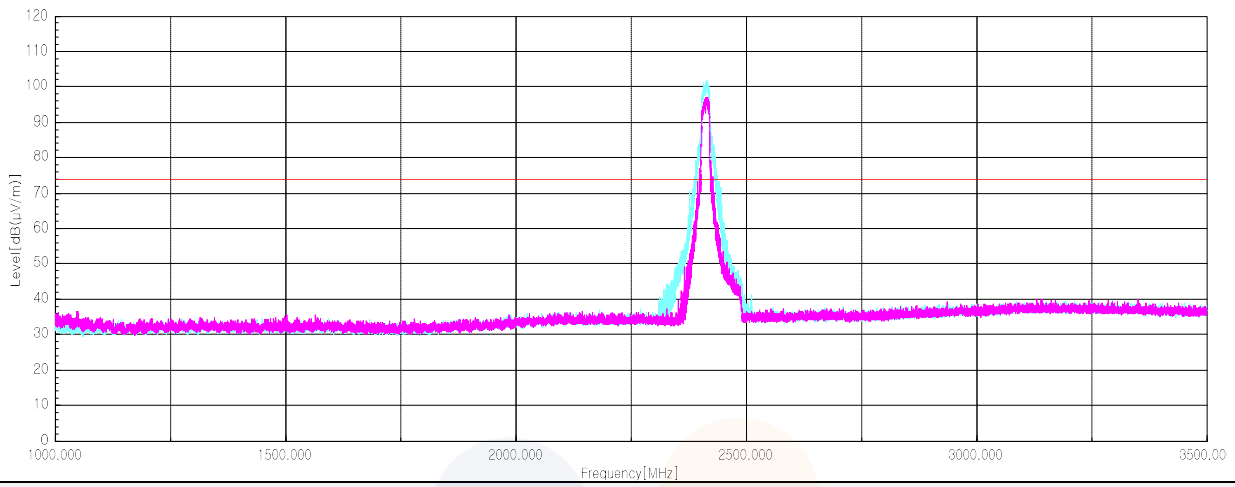


**Horizontal/Vertical for 3.5 GHz ~ 18 GHz**

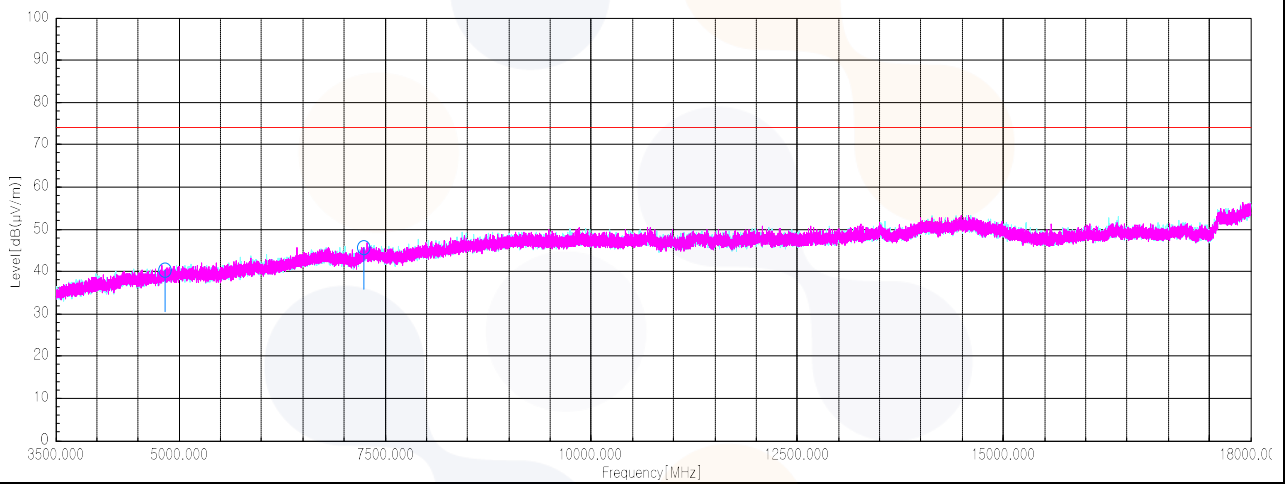


**802.11n HT20\_2 437 MHz**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu V$ ))	(dB)	(dB)	(dB)	(dB( $\mu V/m$ ))	(dB( $\mu V/m$ ))	(dB)
<b>Peak data</b>								
4 870.73 <sup>1)</sup>	V	54.30	32.72	-45.83	-	41.19	74.00	32.81
7 312.05 <sup>1)</sup>	V	53.40	37.05	-44.31	-	46.16	74.00	27.86
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

**Horizontal/Vertical for 1 GHz ~ 3.5 GHz**

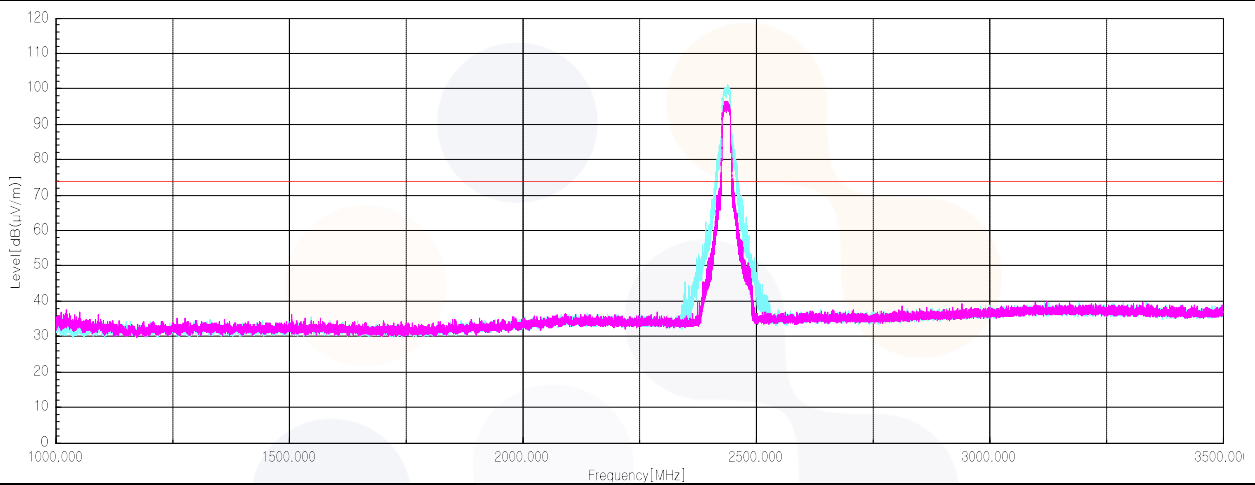


**Horizontal/Vertical for 3.5 GHz ~ 18 GHz**

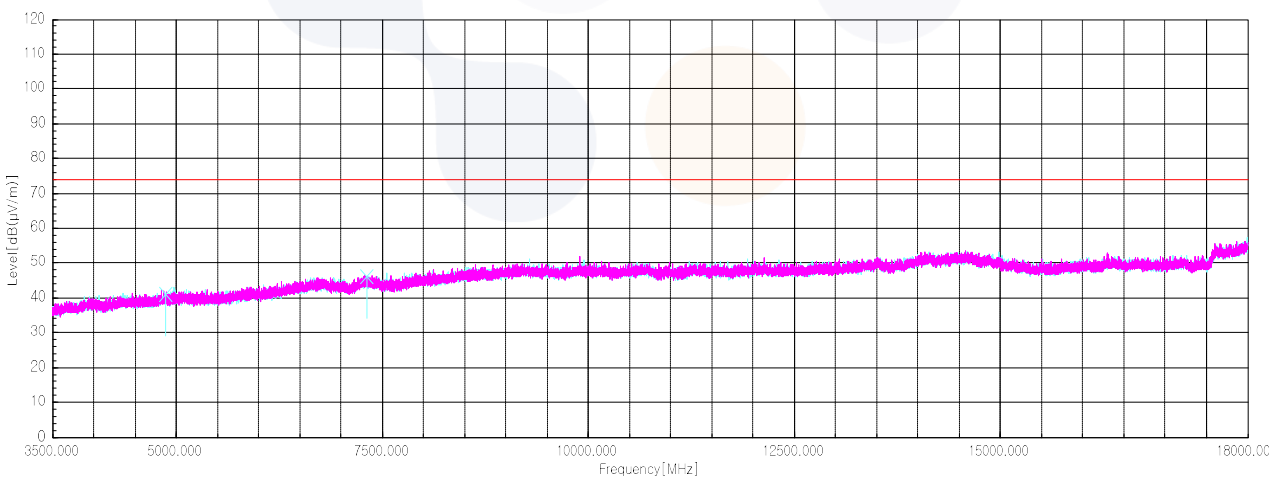

**802.11n HT20\_2 462 MHz**


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
2 389.78 <sup>1)</sup>	V	49.30	27.10	-30.39	-	46.01	74.00	27.99
2 483.59 <sup>1)</sup>	V	67.70	27.70	-30.24	-	65.16	74.00	8.84
4 920.03 <sup>1)</sup>	V	52.50	32.74	-45.61	-	39.63	74.00	34.37
7 389.38 <sup>1)</sup>	H	52.90	36.92	-44.18	-	45.64	74.00	28.36
<b>Average Data</b>								
2 483.59 <sup>1)</sup>	V	53.98	27.70	-30.24	0.43	51.87	54.00	2.13

**Average data**

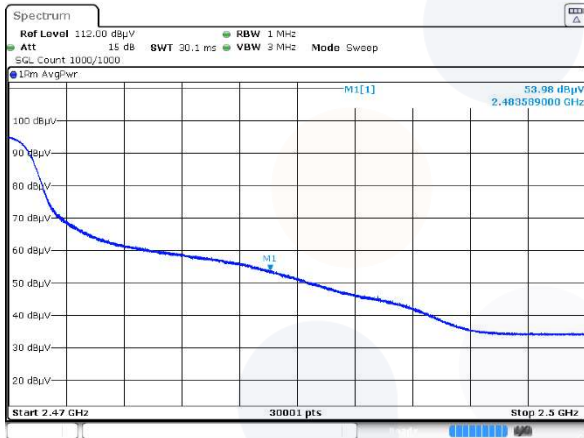


Blank

**Horizontal/Vertical for Band-edge**

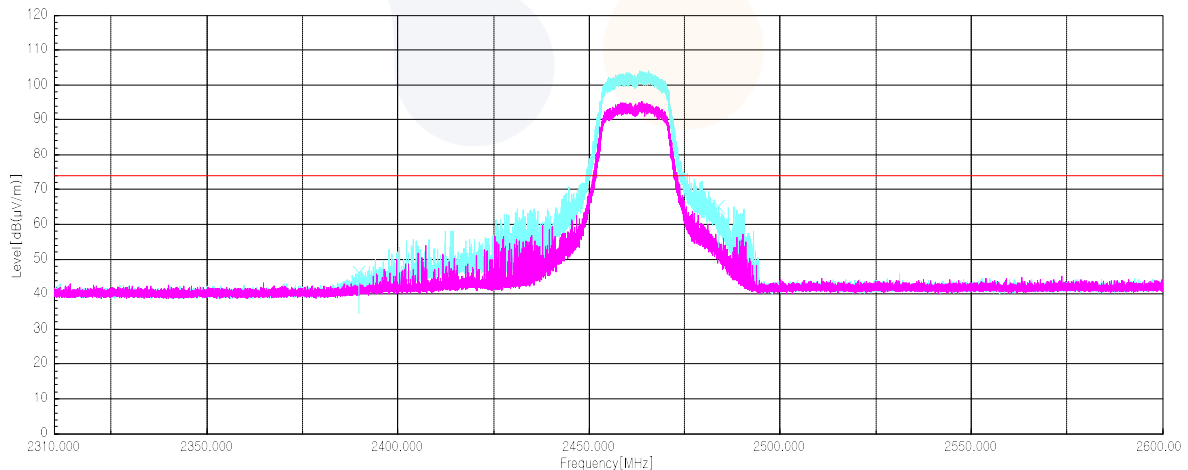




**Horizontal/Vertical for 1 GHz ~ 3.5 GHz**

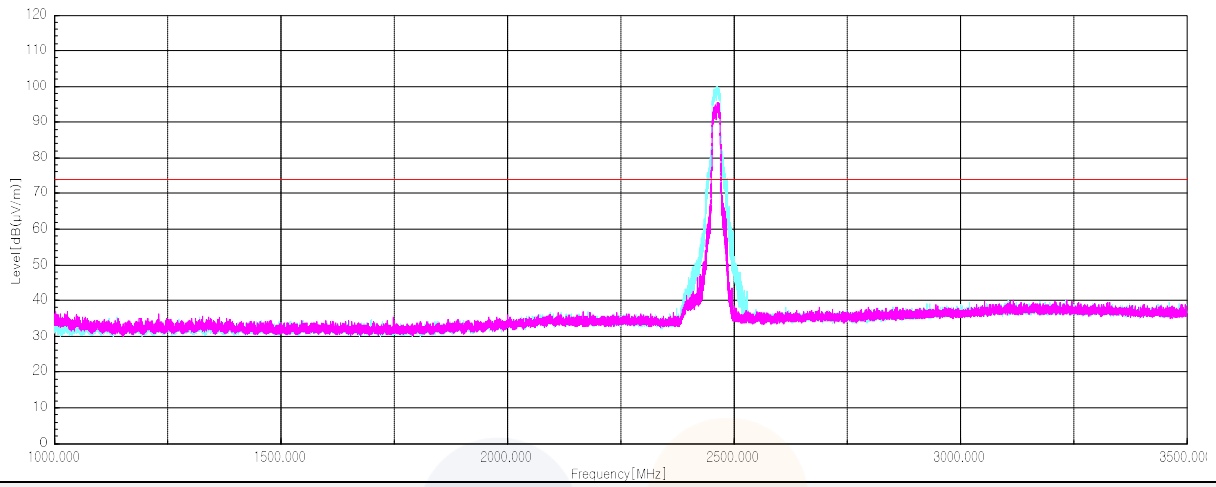


**Horizontal/Vertical for 3.5 GHz ~ 18 GHz**

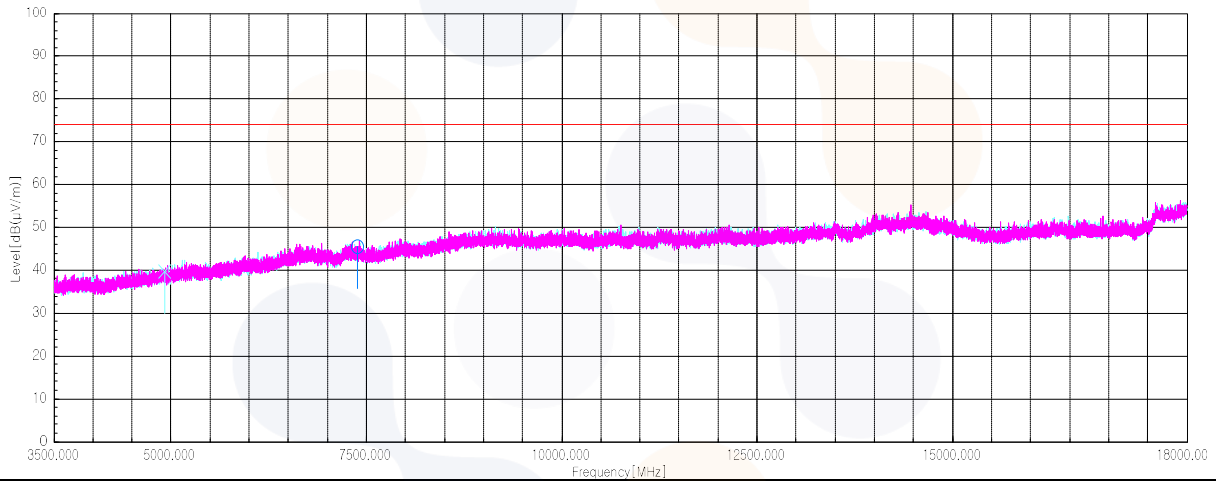

**802.11n HT20\_2 467 MHz**


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
2 483.54 <sup>1)</sup>	V	61.70	27.70	-30.24	-	59.16	74.00	14.84
4 941.30 <sup>1)</sup>	V	54.50	32.78	-45.51	-	41.77	74.00	32.37
7 400.50 <sup>1)</sup>	V	52.60	36.90	-44.16	-	45.34	74.00	28.66
<b>Average Data</b>								
2 483.54 <sup>1)</sup>	V	44.74	27.70	-30.24	0.43	42.63	54.00	11.37

**Average data**

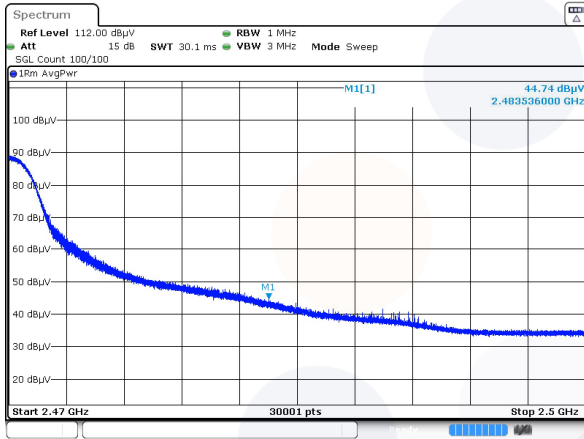


Blank


**Horizontal/Vertical for Band-edge**

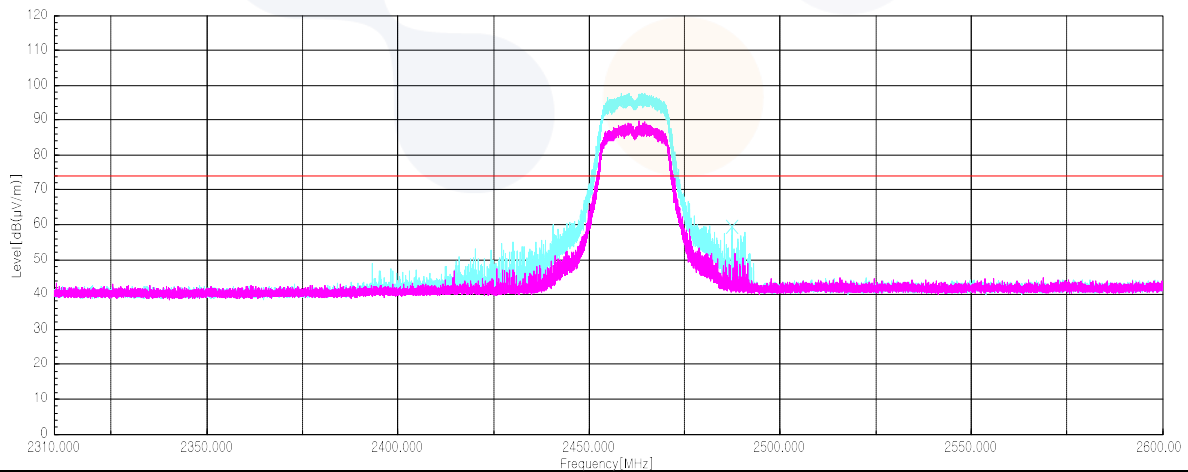

**Horizontal/Vertical for 1 GHz ~ 3.5 GHz**

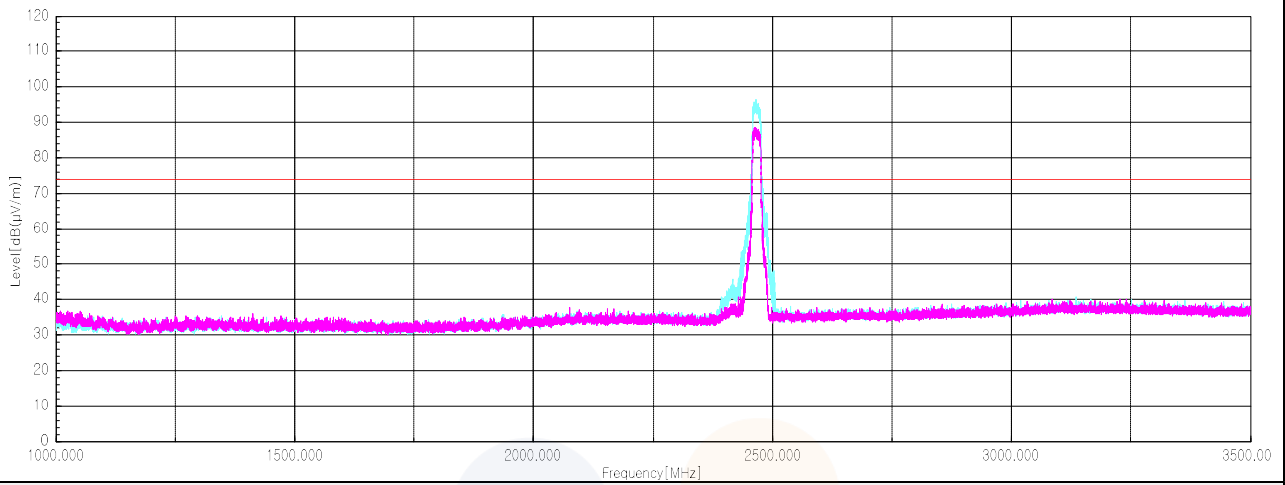

**Horizontal/Vertical for 3.5 GHz ~ 18 GHz**

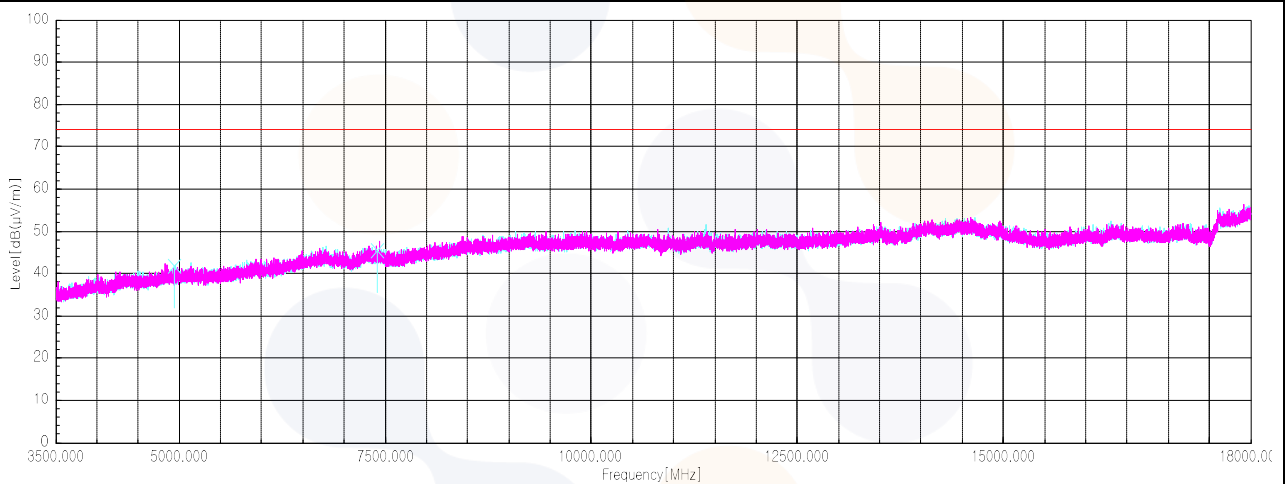

**802.11n HT20\_2 472 MHz**


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
2 483.59 <sup>1)</sup>	V	69.00	27.70	-30.24	-	66.46	74.00	7.54
4 937.43 <sup>1)</sup>	H	53.80	32.77	-45.53	-	41.04	74.00	32.96
7 410.65 <sup>1)</sup>	H	52.40	36.88	-44.14	-	45.14	74.00	28.86
<b>Average Data</b>								
2 483.59 <sup>1)</sup>	V	53.50	27.70	-30.24	0.43	51.39	54.00	2.61

**Average data**




Blank


**Horizontal/Vertical for Band-edge**

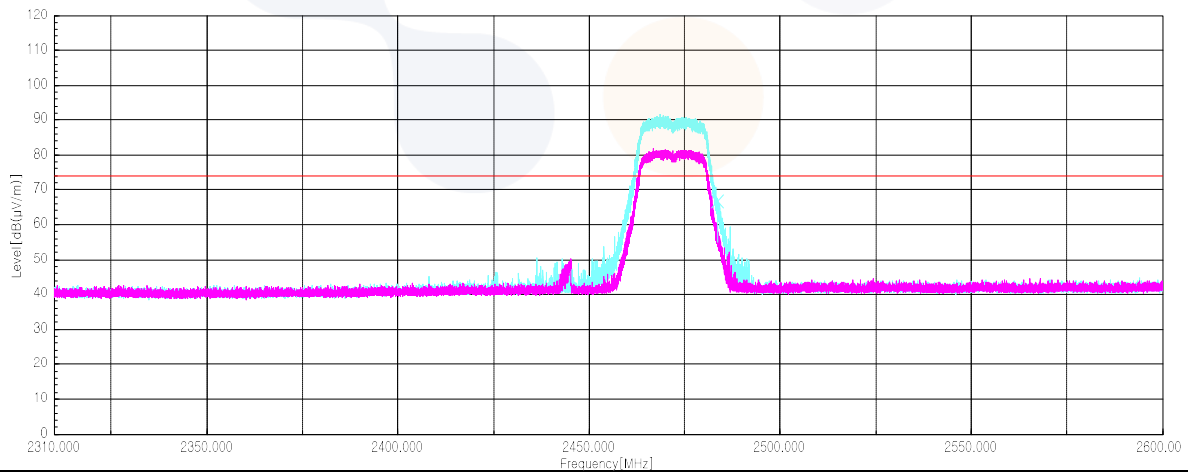

**Horizontal/Vertical for 1 GHz ~ 3.5 GHz**

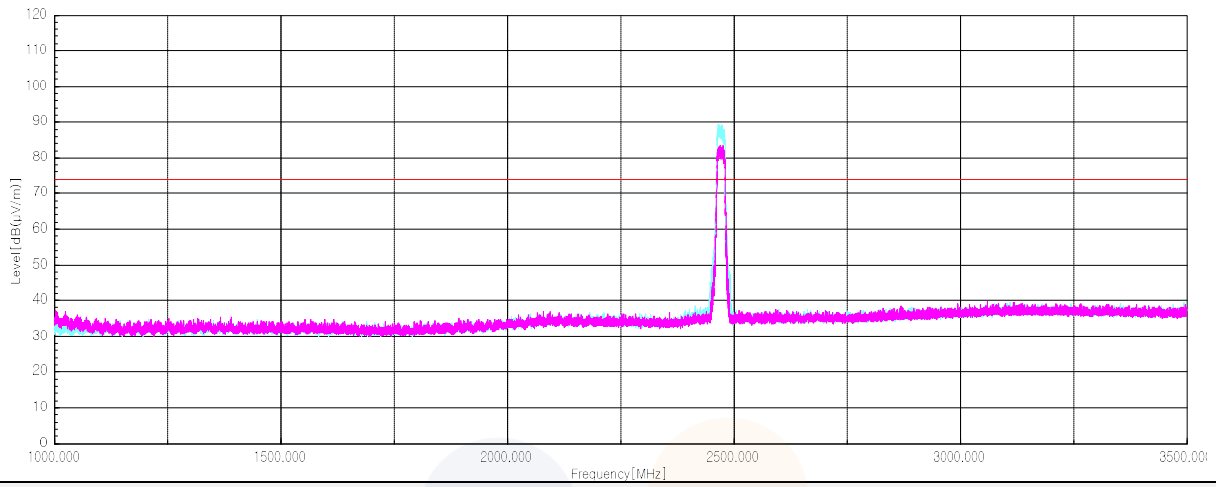


**Horizontal/Vertical for 3.5 GHz ~ 18 GHz**

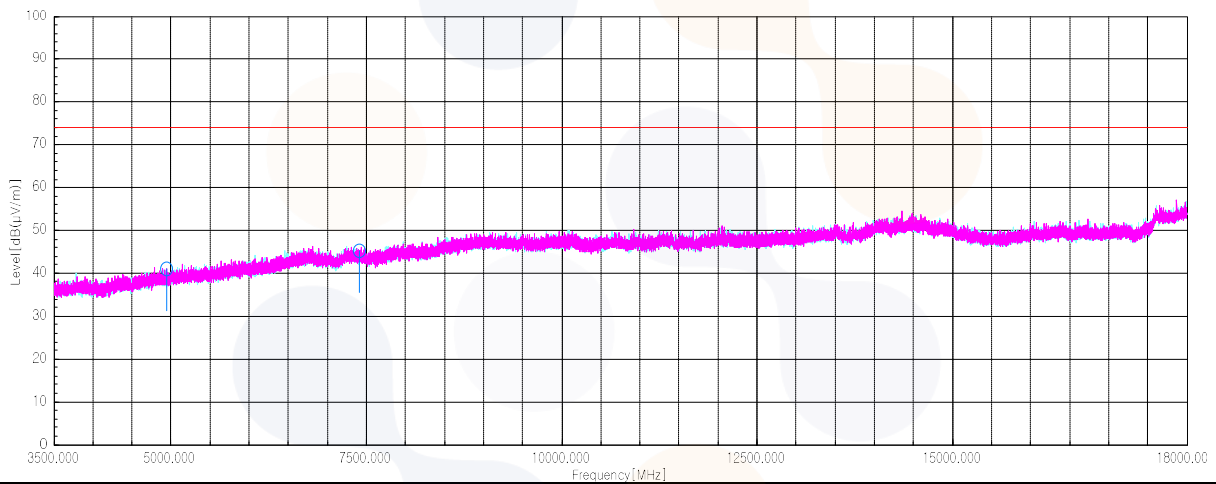

**Test results (Above 18 GHz) – Worst case: 802.11n HT20 / 2 462 MHz**


**Horizontal/Vertical for 18 GHz ~ 26.5 GHz**

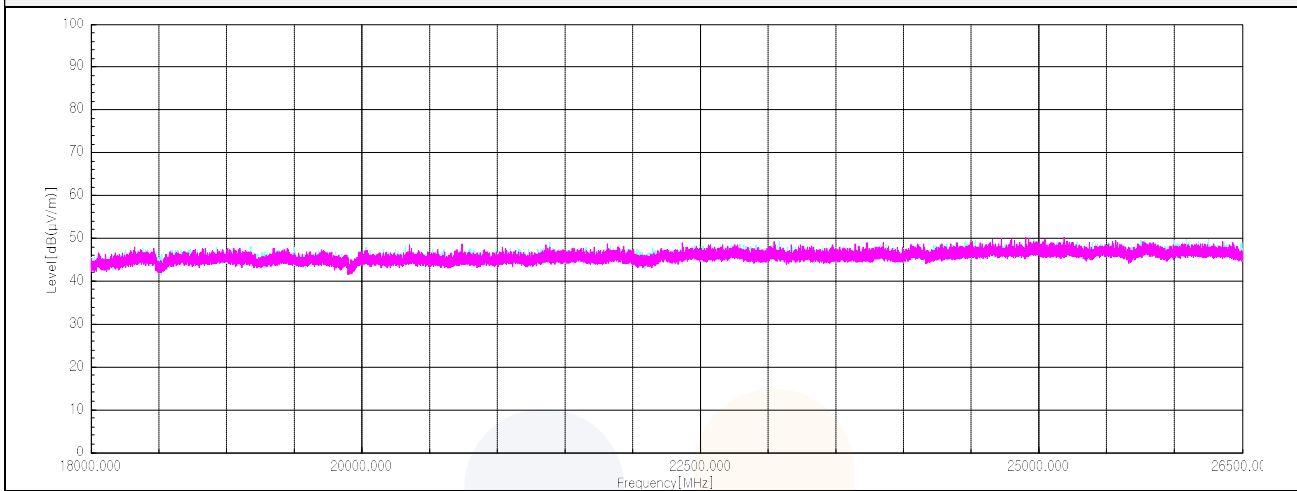

**Note:** The Worst case was based on the lowest margin condition considering Harmonic and Spurious Emission

## 7.5. Conducted Spurious Emission

### Test setup



### Limit

#### According to §15.247(d),

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Limit : 20 dBc

### Test procedure

ANSI C63.10 - Section 11.11.3

KDB 558074 D01 v05 - Section 8.5

### Test settings

Establish an emission level by using the following procedure:


- 1) Set the center frequency and span to encompass frequency range to be measured.
- 2) Set the RBW = 100 kHz
- 3) Set the VBW  $\geq [3 \times \text{RBW}]$
- 4) Detector = peak
- 5) Sweep time = auto couple
- 6) Trace mode = max hold
- 7) Allow trace to fully stabilize.
- 8) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.


**Test results**

**802.11b**

**Conducted band-edge / 2 412 MHz**

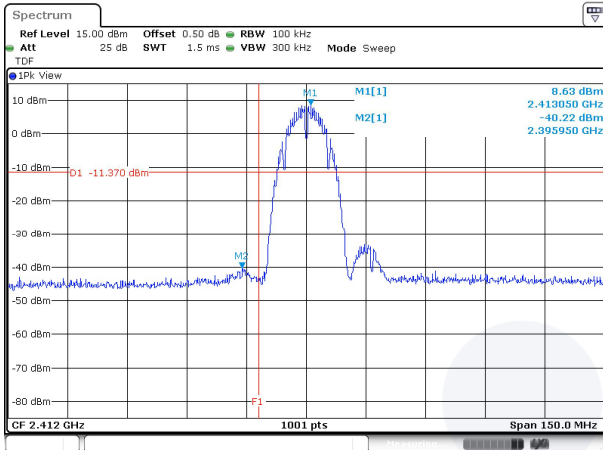


**Conducted spurious / 2 412 MHz**

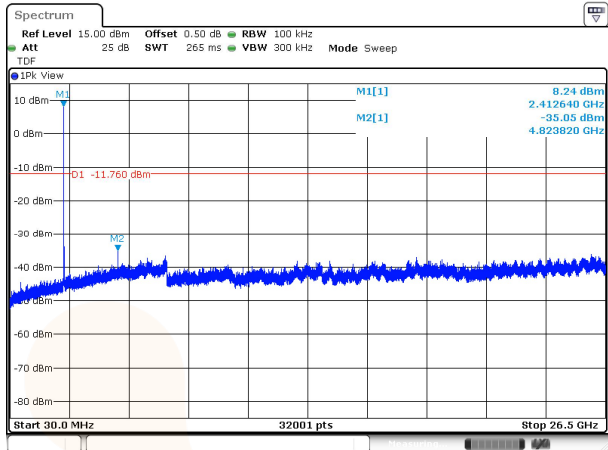


**Conducted band-edge / 2 437 MHz**

Blank

**Conducted spurious / 2 437 MHz**

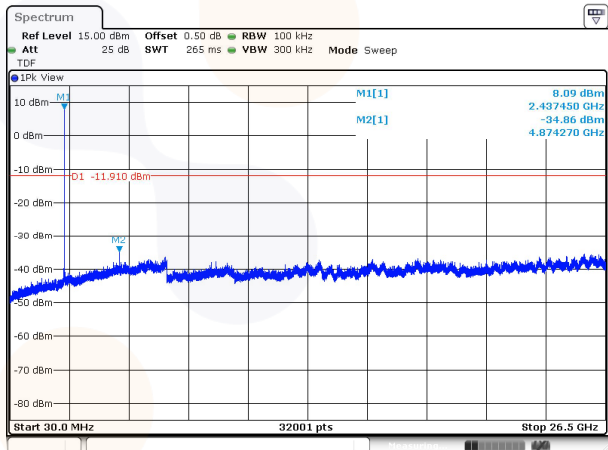

**Conducted band-edge / 2 462 MHz**

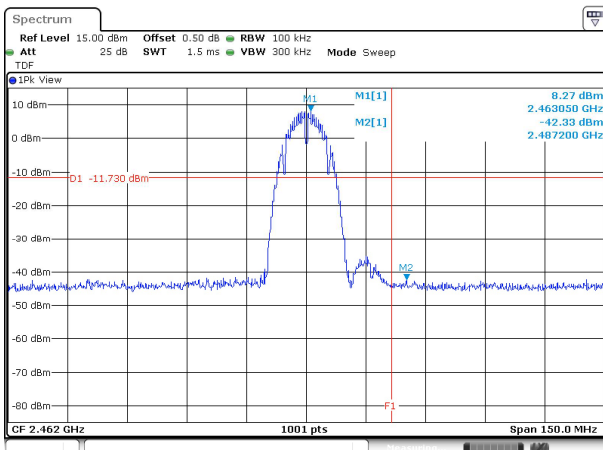

**Conducted spurious / 2 462 MHz**

