


. Plot Data for LTE + CDMA, Output Port 1  
(QPSK Low Channel)

(30 MHz ~ 1 GHz)




(1 GHz ~ 26.5 GHz)

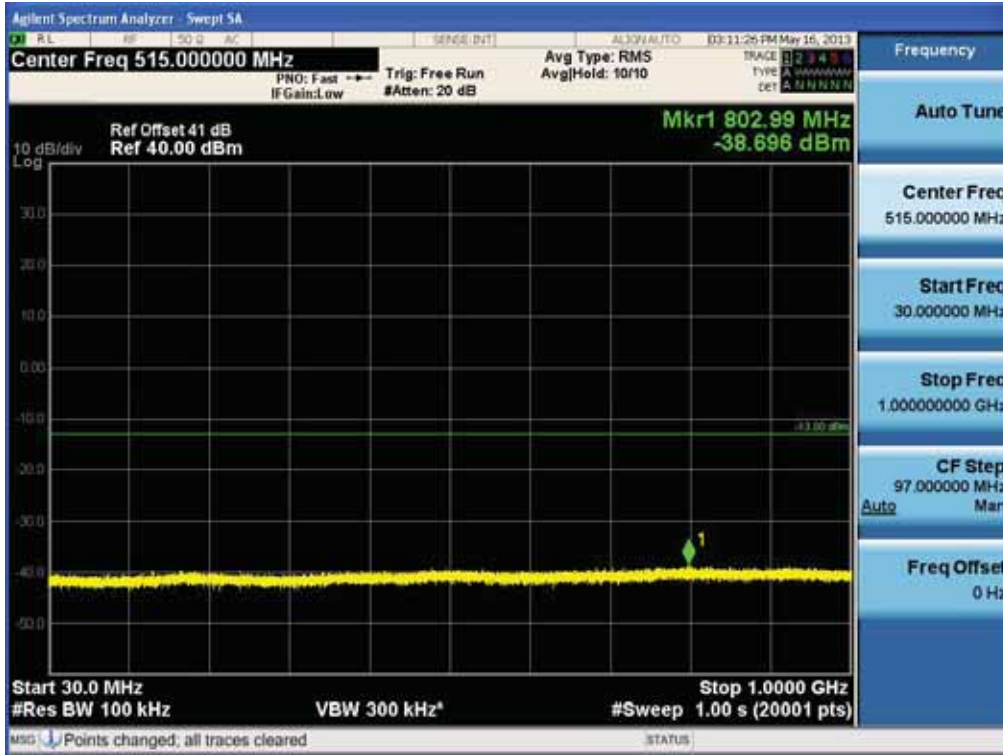

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 134 of 156

(Band Edge)

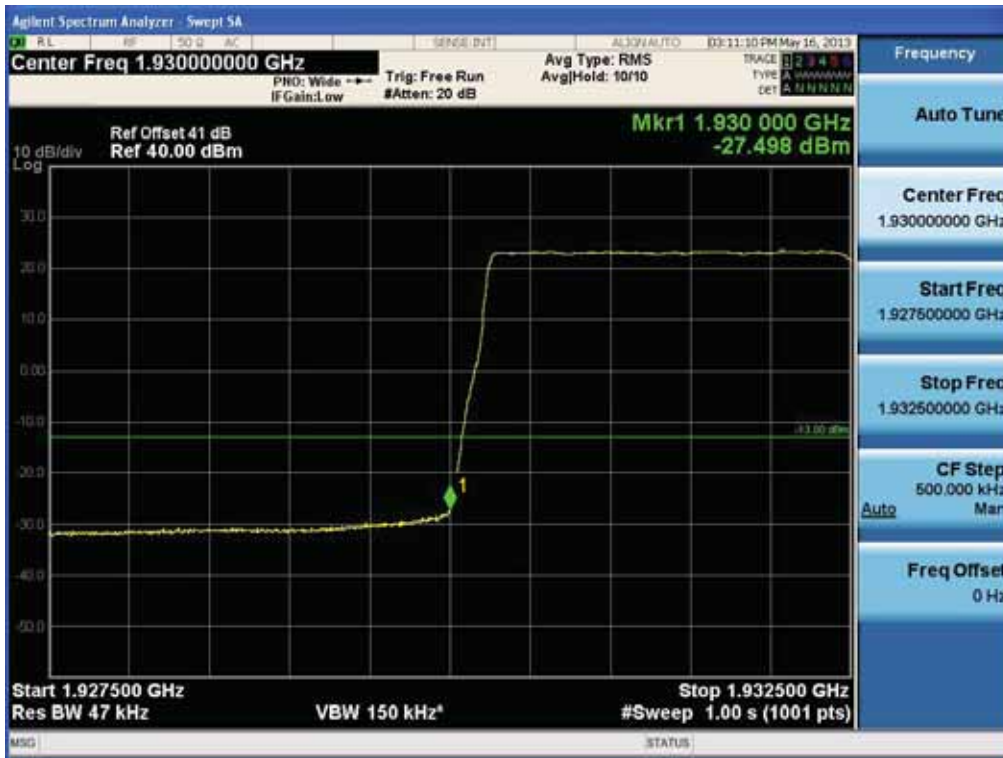

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 135 of 156

(QPSK Middle Channel)

(30 MHz ~ 1 GHz)



(1 GHz ~ 26.5 GHz)



FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 136 of 156

(QPSK High Channel)

(30 MHz ~ 1 GHz)



(1 GHz ~ 26.5 GHz)



FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 137 of 156


(Band Edge)



FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 138 of 156

(16QAM Low Channel)

(30 MHz ~ 1 GHz)

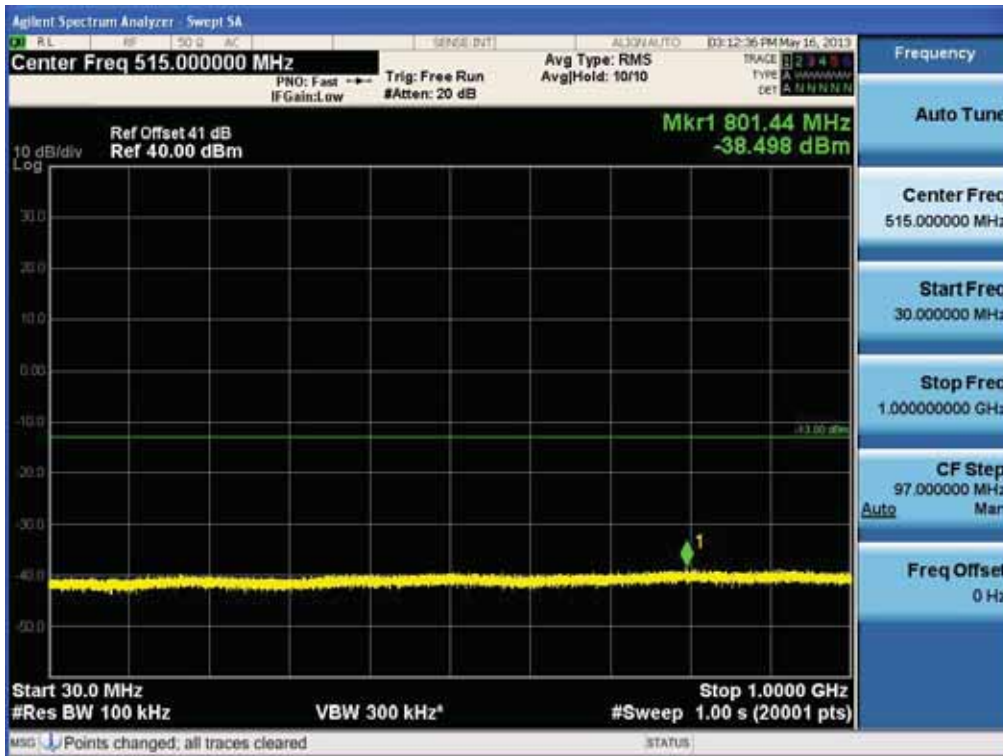

(1 GHz ~ 26.5 GHz)



FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 139 of 156

(Band Edge)



FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 140 of 156

(16QAM Middle Channel)

(30 MHz ~ 1 GHz)




(1 GHz ~ 26.5 GHz)



FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 141 of 156

(16QAM High Channel)

(30 MHz ~ 1 GHz)

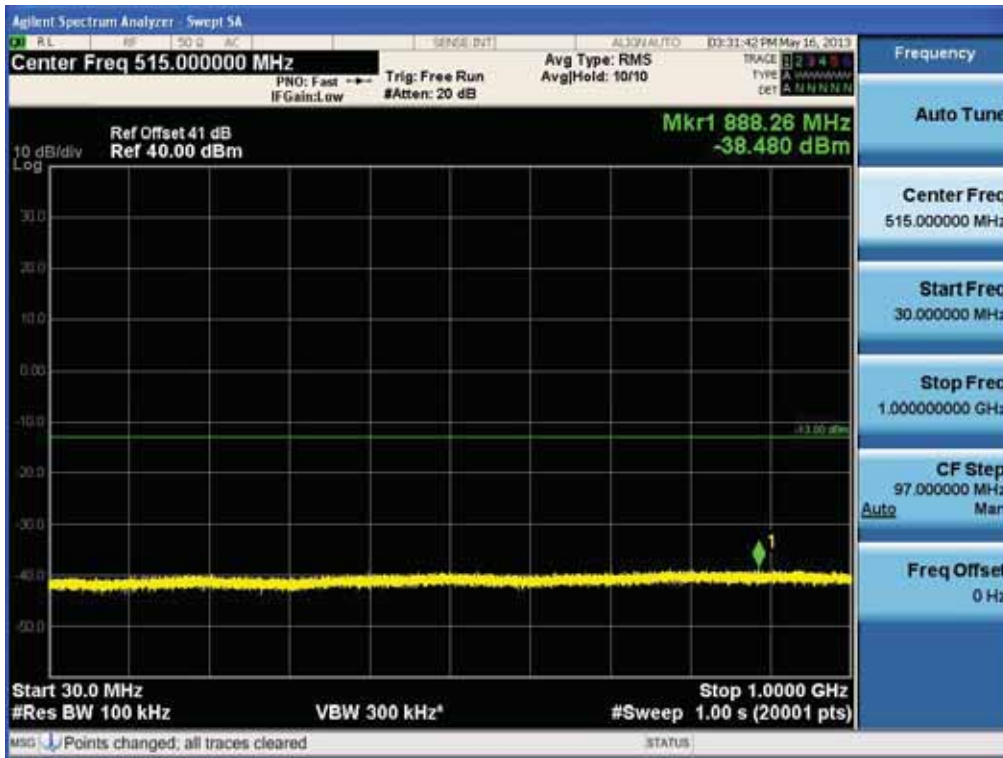

(1 GHz ~ 26.5 GHz)



FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 142 of 156


(Band Edge)



FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 143 of 156

(64QAM Low Channel)

(30 MHz ~ 1 GHz)

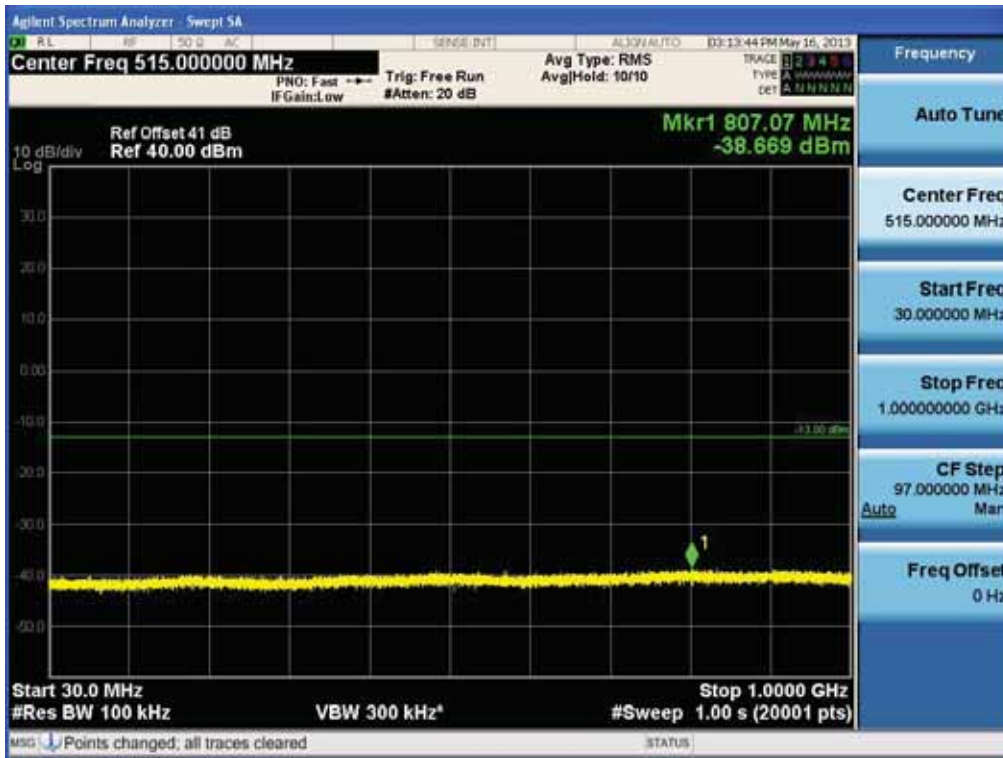


(1 GHz ~ 26.5 GHz)



FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 144 of 156

(Band Edge)

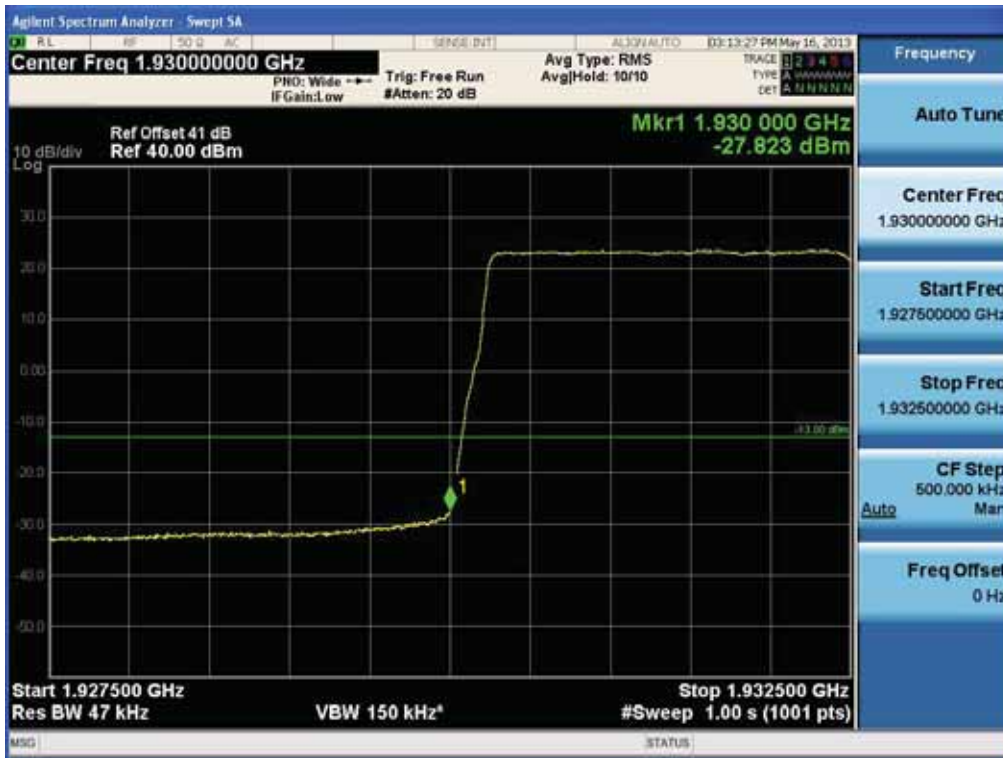

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 145 of 156

(64QAM Middle Channel)

(30 MHz ~ 1 GHz)



(1 GHz ~ 26.5 GHz)



FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 146 of 156

(64QAM High Channel)

(30 MHz ~ 1 GHz)



(1 GHz ~ 26.5 GHz)



FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 147 of 156

(Band Edge)



FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 148 of 156

## 8. RADIATED SPURIOUS EMISSION

### 8.1 Applicable Standard

According to FCC § 24.238

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 8.2 Test Equipment List and Details

Manufacturer	Model / Equipment	Serial No.	Calibration Due
Schwarzbeck	BBHA 9120D / Double Ridged Horn Antenna	937	10/17/2013
Schwarzbeck	BBHA 9120D / Double Ridged Horn Antenna	147	05/15/2014
Schwarzbeck	VULB 9160 / TRILOG Antenna	3150	12/17/2014
HD	MA240 / Antenna Position Tower	556	N/A
EMCO	1050 / Turn Table	114	N/A
HD GmbH	HD 100 / Controller	13	N/A
HD GmbH	KMS 560 / SlideBar	12	N/A
MITEQ	AMF-6B-180265-35-10P / POWER AMP	667624	04/16/2014
EMCO	6502/Loop Antenna	9009-2536	01/11/2014
Agilent	N9020A /Signal Analyzer	US46220219	04/25/2014
Agilent	6674A / DC Power Supply	3501A00901	04/16/2014

### 8.3 Test Procedure

Radiated emission measurements were performed at an semi-anechoic chamber.

The EUT was set at a distance of 3m from the receiving antenna. The EUT's RF ports were terminated to 50ohm load. The EUT was set to transmit at the low, mid and high channels of the transmitter frequency range at its maximum power level. The EUT was rotated about  $360^0$  and the receiving antenna scanned from 1-4m in order to capture the maximum emission.


A calibrated antenna source was positioned in place of the EUT and the previously recorded signal was duplicated.

The maximum EIRP of the emission was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 149 of 156

horizontal polarization. Harmonic emissions up to the 10th or 40GHz, whichever was the lesser, were investigated.

### 8.3.1 Radiated Spurious Emissions Test Setup

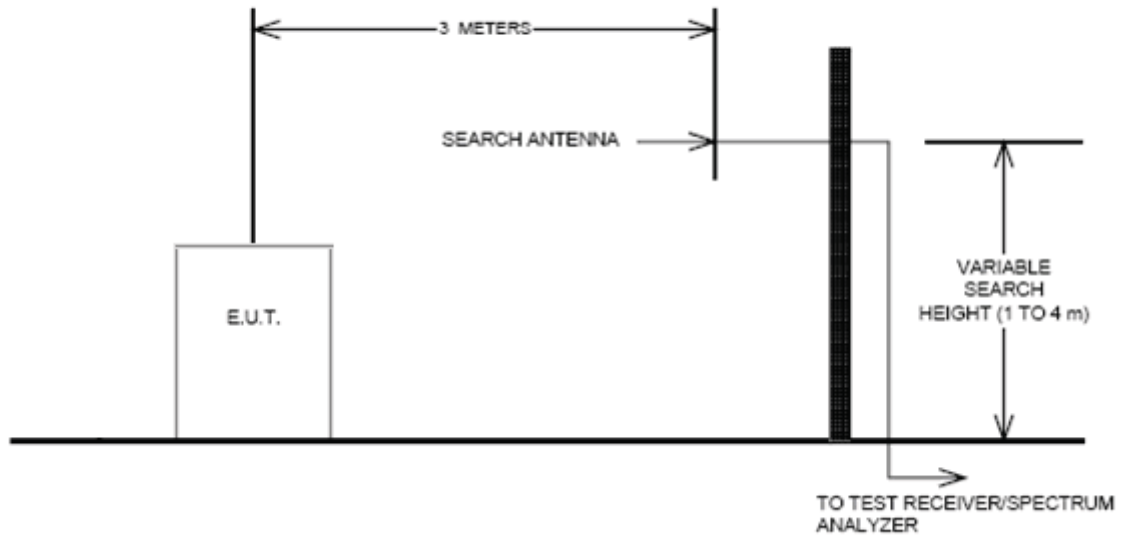

### 8.4 Test Result

: PASS

<b>FCC PT.24 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1305FR21	<b>Date of Issue:</b> May 29, 2013	<b>EUT Type:</b> Remote Radio Head	<b>FCC ID:</b> A3LSMM-BMR004	Page 150 of 156

Test Frequency	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	C.L	SigGen Level [dBm]	Pol.	ERP (dBm)	Margin (dB)
1962.5	3674	-72.63	10.33	7.97	-44.25	V	-41.90	28.90
	4837	-71.08	10.39	9.27	-39.72	V	-38.60	25.60
	5136	-72.97	10.46	9.68	-41.15	V	-40.37	27.37

- It was tested when 2 carriers simultaneously transmitted.

## 9. FREQUENCY STABILITY

### 9.1 Applicable Standard

Requirements: FCC § 2.1055 (a), §24.235 following: The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 9.2 Test Equipment List and Details

Manufacturer	Model / Equipment	Serial No.	Calibration Due
Agilent	N9020A /Signal Analyzer	US46220219	04/25/2014
Agilent	6674A / DC Power Supply	3501A00901	04/16/2014
WEINSCHEL	67-30-33 / Attenuator	BU5347	11/07/2013
WEINSCHEL	67-30-33 / Attenuator	BR0530	11/07/2013
WEINSCHEL	AF9003-69-31 / Attenuator	11787	11/07/2013
WEINSCHEL	AF9003-69-31 / Attenuator	5701	11/07/2013

### 9.3 Test Procedure

Frequency Stability over Temperature variation:

The equipment under test was connected to an external DC power supply and the RF output was connected to a Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 30 minutes, the frequency output was recorded from the VSA8960 S/W via MXA Signal Analyzer.

Frequency stability over Voltage variation: An external variable DC power supply Source. The voltage was set to 85% and 115% of the nominal value. The output frequency was recorded for each voltage.

### 9.4. Test Result

: Pass

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 152 of 156

9.4.1. Frequency Stability over Temperature and Voltage variation

(LTE)

Modulation: QPSK

Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	+20(Ref)	1932 499 998	-1.6	0.0	0.0000
	-30	1932 500 003	2.6	4.2	0.0022
	-20	1932 499 997	-3.4	-1.8	-0.0009
	-10	1932 500 001	1.5	3.1	0.0016
	0	1932 499 999	-1.2	0.4	0.0002
	+10	1932 499 998	-2.0	-0.4	-0.0002
	+30	1932 500 000	0.5	2.1	0.0011
	+40	1932 499 998	-1.6	0.0	0.0000
	+50	1932 500 001	1.4	3.0	0.0016
115%	+20	1932 499 999	-1.3	0.3	0.0002
85%	+20	1932 500 000	0.4	2.0	0.0010

Reference: - 48 Vdc at 20°C Freq. = 1932,500,000 MHz

Modulation: 16QAM

Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	+20(Ref)	1962 499 998	-1.5	0.0	0.0000
	-30	1962 499 998	-1.6	-0.1	-0.0001
	-20	1962 500 000	-0.4	1.1	0.0006
	-10	1962 499 998	-1.6	-0.1	-0.0001
	0	1962 499 999	-1.1	0.5	0.0002
	+10	1962 500 000	0.1	1.6	0.0008
	+30	1962 500 001	0.8	2.3	0.0012
	+40	1962 500 000	0.4	1.9	0.0010
	+50	1962 500 000	0.3	1.9	0.0010
115%	+20	1962 500 001	0.9	2.5	0.0013
85%	+20	1962 500 001	1.4	3.0	0.0015

Reference: - 48 Vdc at 20°C Freq. = 1962,500,000 MHz

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 153 of 156

**Modulation: 64QAM**

Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	+20(Ref)	1992 499 997	-2.8	0.0	0.0000
	-30	1992 499 997	-2.8	0.0	0.0000
	-20	1992 500 000	0.1	3.0	0.0015
	-10	1992 500 001	0.6	3.4	0.0018
	0	1992 499 998	-2.0	0.8	0.0004
	+10	1992 499 998	-1.5	1.3	0.0007
	+30	1992 499 999	-0.5	2.3	0.0012
	+40	1992 500 000	0.2	3.0	0.0016
	+50	1992 500 002	2.1	4.9	0.0026
115%	+20	1992 500 001	1.4	4.2	0.0022
85%	+20	1992 500 003	2.6	5.4	0.0028

**Reference:** - 48 Vdc at 20°C **Freq.** = 1992,500,000 MHz

# 10. RF EXPOSURE STATEMENT

## 1. LIMITS

According to §1.1310 and §2.1091 RF exposure is calculated.

(B) Limits for General Population/Uncontrolled Exposures

Frequency range (MHz)	Electric field Strength (V/m)	Magnetic field Strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
0.3 - 1.34.....	614	1.63	*(100)	30
1.34 - 30.....	824/f	2.19/f	*(180/ f <sup>2</sup> )	30
30 - 300.....	27.5	0.073	0.2	30
300 - 1500.....	.....	.....	f/1500	30
1500 - 100.000.....	.....	.....	1.0	30

F = frequency in MHz

\* = Plane-wave equivalent power density

## 2. MAXIMUM PERMISSIBLE EXPOSURE Prediction

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

S = Power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

<b>FCC PT.24 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 155 of 156

### 3. RESULTS

Max Peak output Power at antenna input terminal	46.22	dBm
Max Peak output Power at antenna input terminal	41879.4	W
Prediction distance	500.0000	cm
Prediction frequency	1990.000	MHz
Antenna Gain(typical)	18.0000	dBi
Antenna Gain(numeric)	63.09573	-
Power density at prediction frequency (S)	0.841105	mW/cm <sup>2</sup>
MPE limit for uncontrolled exposure at prediction frequency	1.00000	mW/cm <sup>2</sup>

The power density level at 500 cm is 0.841105 mW/cm<sup>2</sup>, which is below the uncontrolled exposure limit of 1.0 mW/cm<sup>2</sup> at SMM-BMR004

<b>FCC PT.24 TEST REPORT</b>	<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1305FR21	Date of Issue: May 29, 2013	EUT Type: Remote Radio Head	FCC ID: A3LSMM-BMR004	Page 156 of 156