

FCC BT LE REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Address:129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea**Date of Issue:**

February 28, 2019

Location:

HCT CO., LTD.,

74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA**Report No.:** HCT-RF-1902-FC057-R1**FCC ID:** A3LSMM105M**APPLICANT:** SAMSUNG Electronics Co., Ltd.**Model:** SM-M105M/DS**Additional Model:** SM-M105Y/DS, SM-M105Y, SM-M105M**EUT Type:** Mobile Phone**Average Output Power:** 8.108 dBm (6.468 mW)**Frequency Range:** 2402 MHz -2480 MHz**Modulation type** GFSK**FCC Classification:** Digital Transmission System(DTS)**FCC Rule Part(s):** Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

**Report prepared by : Jeong Ho Kim**
Engineer of Telecommunication testing center**Approved by : Jong Seok Lee**
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1902-FC057	February 26, 2019	- First Approval Report
HCT-RF-1902-FC057-R1	February 28, 2019	- Page.5 revised

Table of Contents

1. EUT DESCRIPTION	4
2. TEST METHODOLOGY	5
EUT CONFIGURATION	5
EUT EXERCISE.....	5
GENERAL TEST PROCEDURES.....	5
DESCRIPTION OF TEST MODES.....	5
3. INSTRUMENT CALIBRATION	6
4. FACILITIES AND ACCREDITATIONS.....	6
FACILITIES	6
EQUIPMENT.....	6
5. ANTENNA REQUIREMENTS.....	6
6. MEASUREMENT UNCERTAINTY	7
7. DESCRIPTION OF TESTS	8
8. SUMMARY TEST OF RESULTS	23
9. TEST RESULT	24
9.1 DUTY CYCLE.....	24
9.2 6dB BANDWIDTH.....	26
9.3 OUTPUT POWER.....	29
9.4 POWER SPECTRAL DENSITY	34
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	37
9.6 RADIATED SPURIOUS EMISSIONS.....	46
9.7 RADIATED RESTRICTED BAND EDGES.....	52
9.8 POWERLINE CONDUCTED EMISSIONS	55
10. LIST OF TEST EQUIPMENT.....	59
11. ANNEX A_ TEST SETUP PHOTO.....	61

1. EUT DESCRIPTION

Model	SM-M105M/DS	
EUT Type	Mobile Phone	
Power Supply	DC 3.85 V	
Battery Information	Model: EB-BA750ABUN Type: Li-ion Battery	
Travel Adapter Information	Model: ETA0U83JWS Manufacture: DONGYANG E&P	
Frequency Range	2402 MHz - 2480 MHz	
Max. RF Output Power	Peak (For information only)	1M 37 Byte : 8.459 dBm (7.013 mW) 1M 255 Byte : 8.466 dBm (7.024 mW)
	Average	1M 37 Byte : 8.076 dBm (6.420 mW) 1M 255 Byte : 8.108 dBm (6.468 mW)
Modulation Type	GFSK	
Bluetooth Version	4.2	
Number of Channels	40 Channels	
Antenna Specification	Antenna type: LDS Antenna Peak Gain : -0.51 dBi	
Date(s) of Tests	January 31, 2019 ~ February 14, 2019	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05 dated August 24, 2018 entitled "guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in ANSI C63.10 clause 6.6.5 (Version: 2013)

Conducted Antenna Terminal

See Section from 8.3.(KDB 558074 v05)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

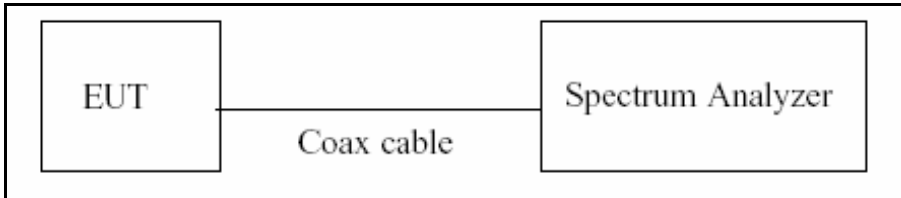

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, (Procedure 11.6 in ANSI 63.10-2013)

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)


- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

This EUT TX condition is actual operating mode by BT LE mode test program.

The Spectrum Analyzer is set to

- Peak Power (Procedure 11.9.1.1 in ANSI 63.10-2013)
 - 1) RBW \geq DTS Bandwidth
 - 2) VBW \geq 3 x RBW
 - 3) SPAN \geq 3 x RBW
 - 4) Detector Mode = Peak
 - 5) Sweep = auto couple
 - 6) trace Mode = max hold
 - 7) Allow trace to fully stabilize.
 - 8) Use peak marker function to determine the peak amplitude level

- Average Power (Procedure 8.3.2.2 in KDB 558074 v05, Procedure 11.9.2.2 in ANSI 63.10-2013)
 - 1) We use the spectrum analyzer's integrated band power measurement function.
 - 2) Measure the duty cycle
 - 3) Set span to at least 1.5 times the OBW
 - 4) RBW = 1-5 % of the OBW, not to exceed 1 MHz.
 - 5) VBW $\geq 3 \times$ RBW.
 - 6) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
 - 7) Sweep time = auto.
 - 8) Detector = RMS(i.e., power averaging)
 - 9) Do not use sweep triggering. Allow the sweep to "free run".
 - 10) Trace average at least 100 traces in power averaging(RMS) mode.
 - 11) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
 - 12) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 11.10.6 in ANSI 63.10-2013.

Method AVGPSD-2A Used.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Span = 1.5 times the DTS channel bandwidth.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power average(rms)
- 7) Ensure that the number of measurement points $\geq 2 \times \text{Span}/RBW$
- 8) Trace Mode = Average mode (a minimum of 100 traces.)
- 9) Allow trace to fully stabilize.
- 10) Measure the duty cycle(D) and Add Duty cycle factor[$10 \log(1/D)$, D=duty cycle], to the measured Avrage PSD result
- 11) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density(Avg) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	21.30
100	20.83
200	20.19
300	20.13
400	20.23
500	20.25
600	20.32
700	20.35
800	20.35
900	20.34
1000	20.39
2000	20.64
2400*	20.67
2500*	20.70
3000	20.71
4000	20.89
5000	21.07
6000	21.06
7000	21.35
8000	21.32
9000	21.48
10000	21.56
11000	21.56
12000	21.68
13000	21.83
14000	21.90
15000	21.98
16000	22.04
17000	22.02
18000	22.08
19000	22.07
20000	22.14
21000	22.17
22000	22.31
23000	22.60
24000	22.34
25000	22.53
26000	22.02

Note : 1. '*' is fundamental frequency range.
 2. Factor = Attenuator loss(20dB) + Cable loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

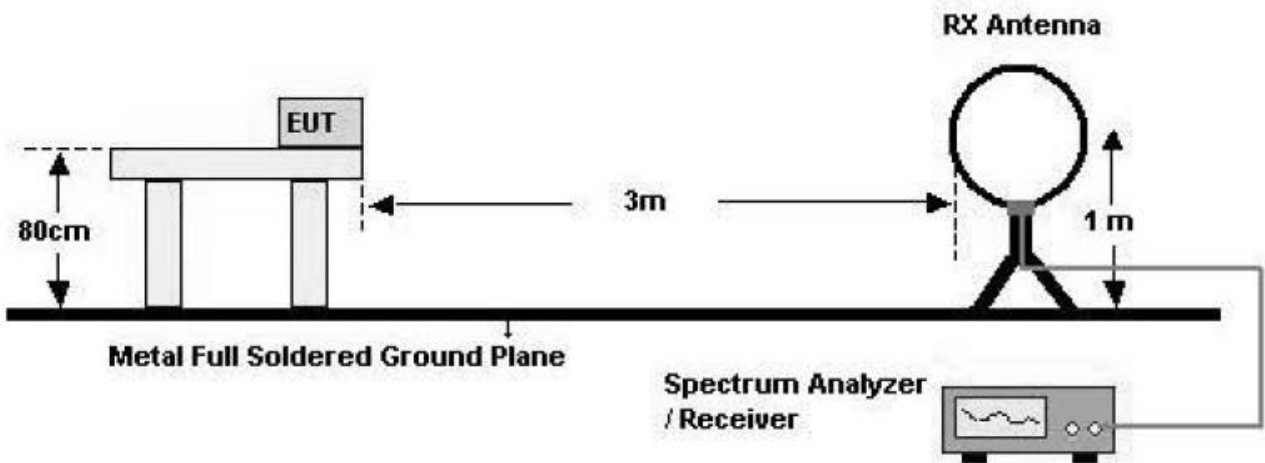

30 MHz - 1 GHz

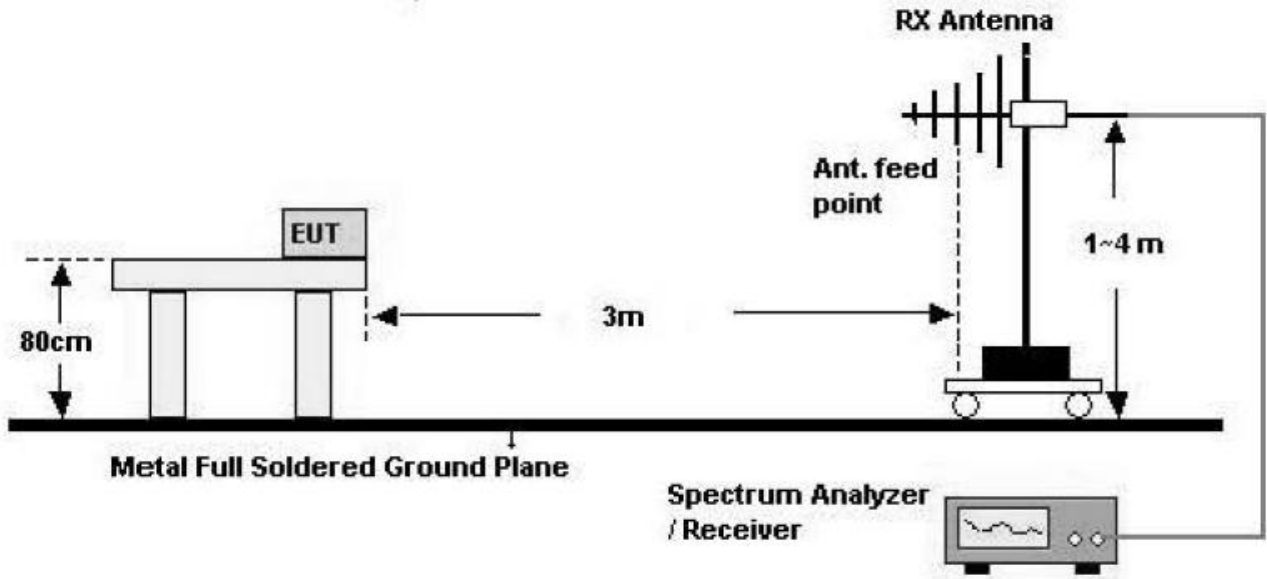

Above 1 GHz

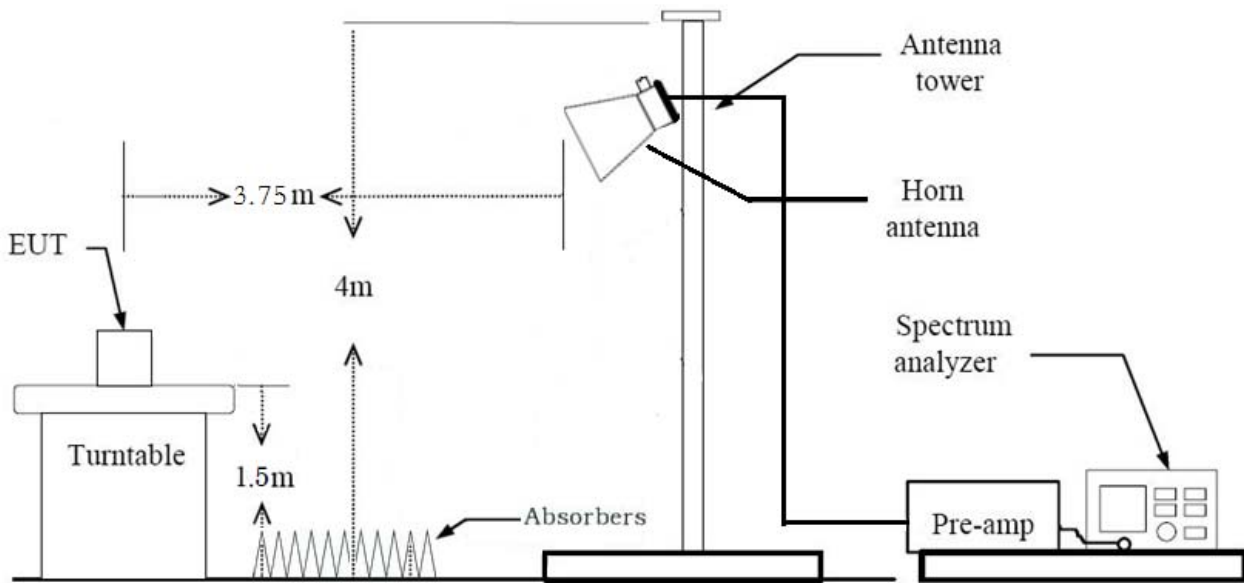

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$

Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW $\geq 3 \cdot$ RBW

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. The test results for below 30 MHz is correlated to an open site.

The result on Open field site is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

5. Spectrum Setting

- (1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \cdot$ RBW

- (2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

*In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Total(Measurement Type : Peak)
= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \cdot$ RBW
 - (2) Measurement Type(Average):
 - Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \cdot$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already

beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + external accessories(earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : Z
3. All packet length of operation were investigated and the test results are worst case in Highest packet length.
 - *Worst case :
 - LE 4.2(1M Bit/s) : 37 Byte

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone+Earphone+Travel Adapter, Stand alone+Travel Adapter
 - Worstcase : Stand alone+Travel Adapter

Conducted test

The EUT was configured with packet length of highest power.

- * Packet length of highest power :
 - LE 4.2(1M Bit/s) : 255 Byte

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

9. TEST RESULT


9.1 DUTY CYCLE

Data rate (Bit/s)	Packet length (Byte)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
1M	37	0.3901	0.6257	0.6235	2.05
	255	2.1350	2.5000	0.8540	0.69

4.2 LE 1M Bit/s Test Plots

255 byte

Duty Cycle (Low-CH 0)

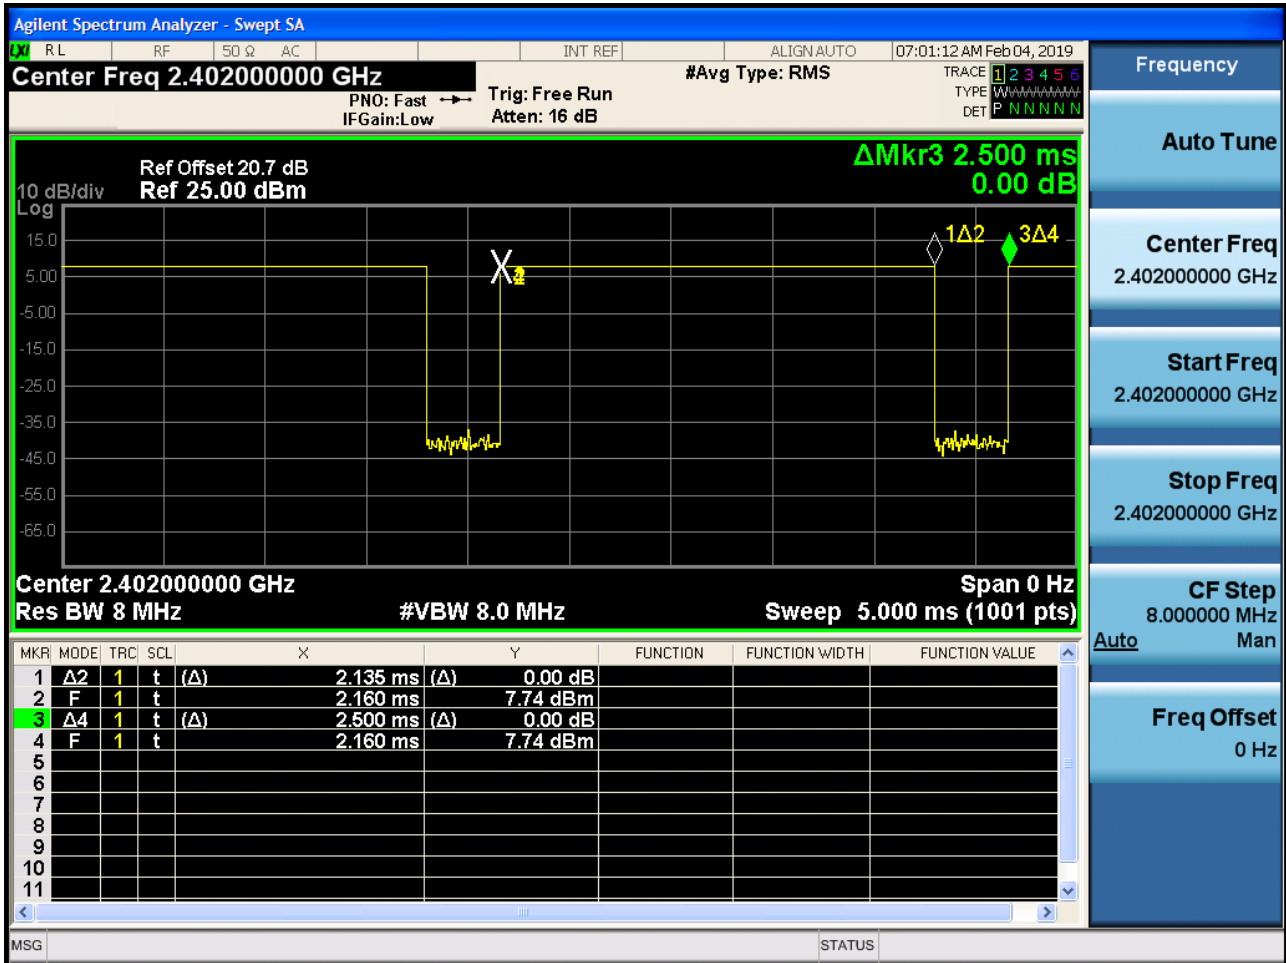


9.2 6dB BANDWIDTH


Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
1M 37 Byte	0	722.2	> 500
	19	716.3	
	39	728.0	
1M 255 Byte	0	685.3	> 500
	19	693.1	
	39	692.8	

■ 1M Bit/s 255 Byte Test Plots


6 dB Bandwidth plot (Low-CH 0)

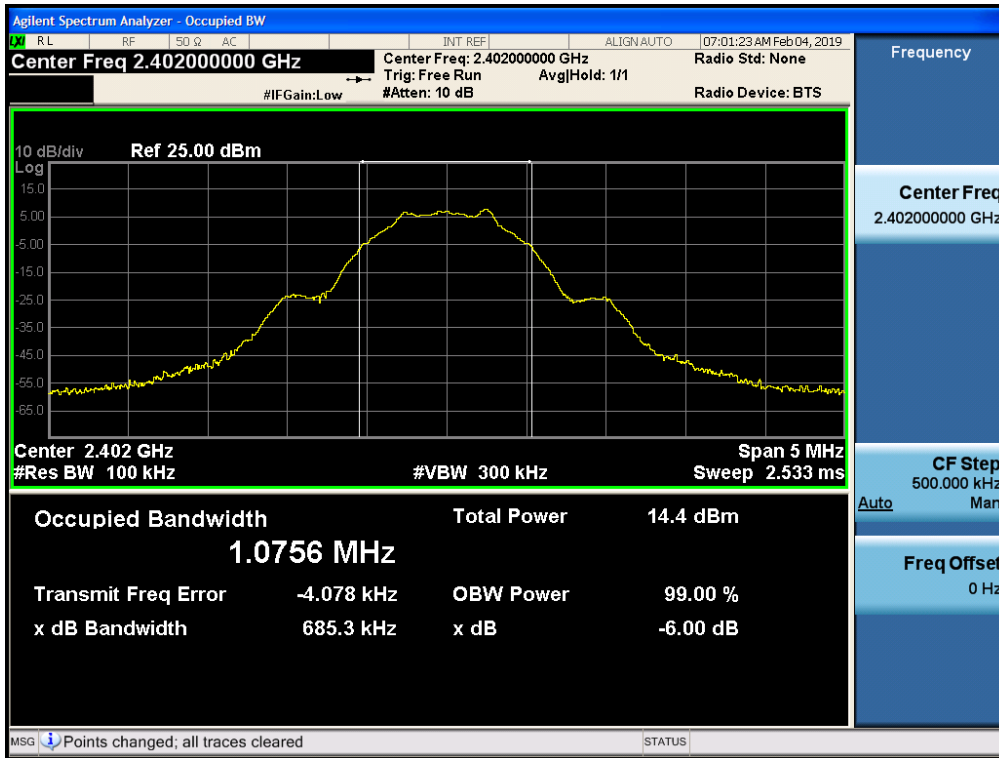

6 dB Bandwidth plot (Mid-CH 19)

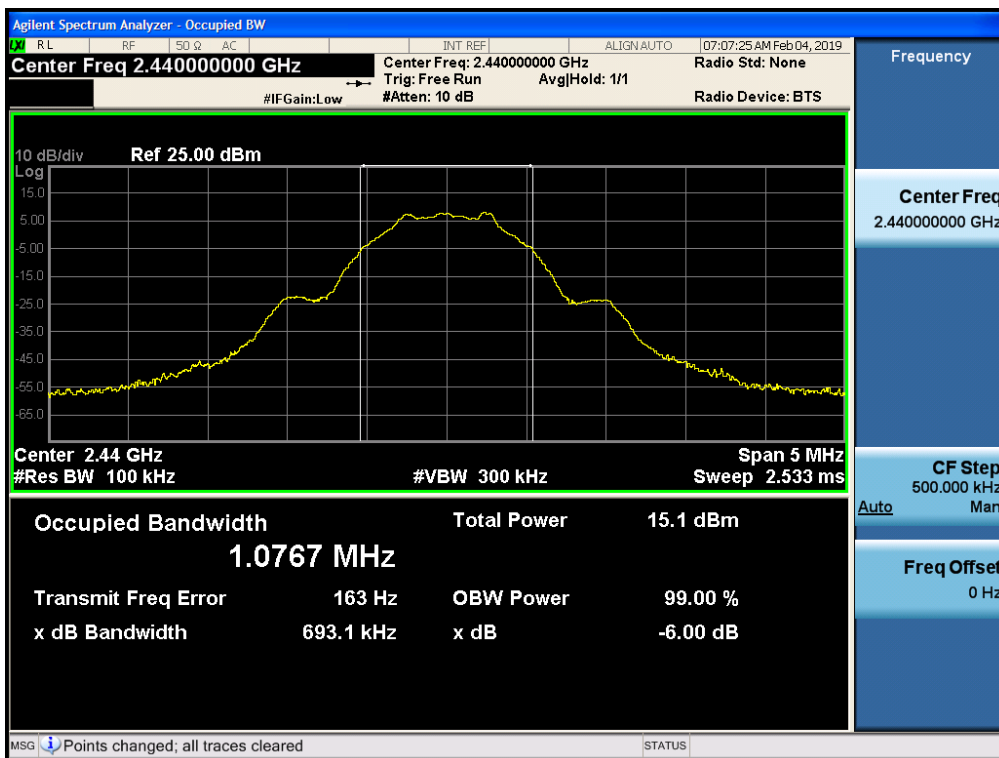

6 dB Bandwidth plot (High-CH 39)

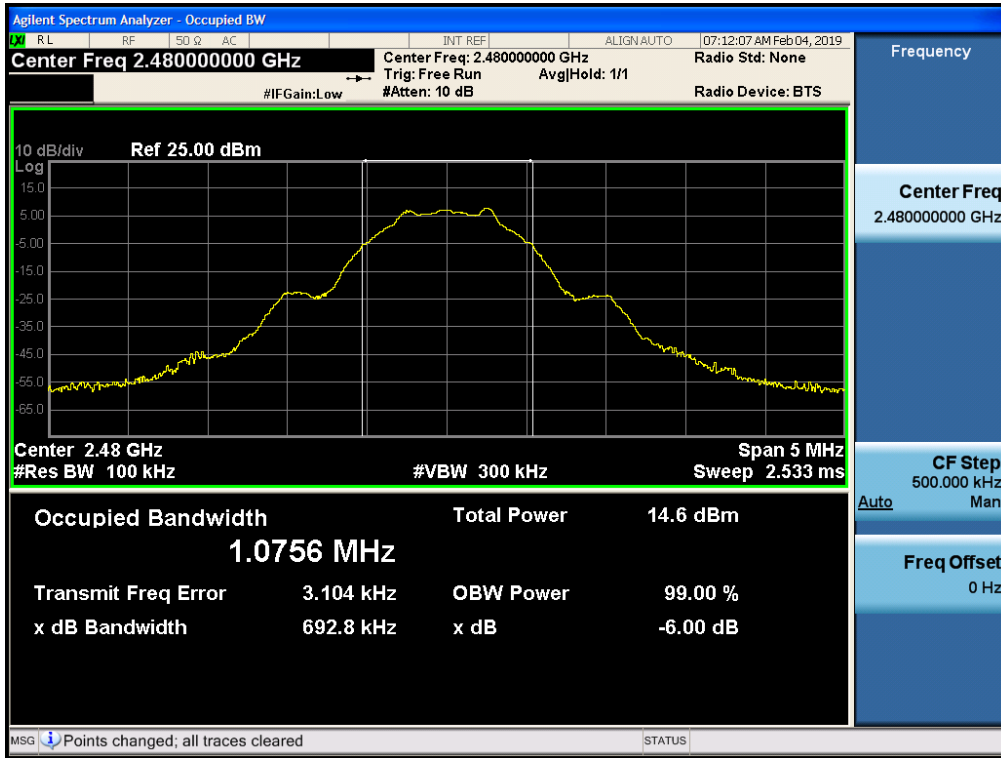

9.3 OUTPUT POWER

Peak Power

LE Mode		Data rate (Bit/s)	Packet length (Byte)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.				
2402	0	1M	37	7.755	30
			255	7.787	
2440	19	1M	37	8.459	
			255	8.466	
2480	39	1M	37	7.928	
			255	8.018	

Average Power

LE Mode		Data rate	Packet length	Measured Power(dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
Frequency[MHz]	Channel No.	(Bit/s)	(Byte)				
2402	0	1M	37	5.44	2.05	7.49	30
			255	6.89	0.69	7.58	
2440	19	1M	37	6.02	2.05	8.08	
			255	7.42	0.69	8.11	
2480	39	1M	37	5.55	2.05	7.61	
			255	6.94	0.69	7.63	


Note :

1. Spectrum reading values are not plot data.
The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.70 dB is offset for 2.4 GHz Band.


■ 1M Bit/s(255 Byte) Test Plots

Peak Power


Conducted Output Power (Low-CH 0)

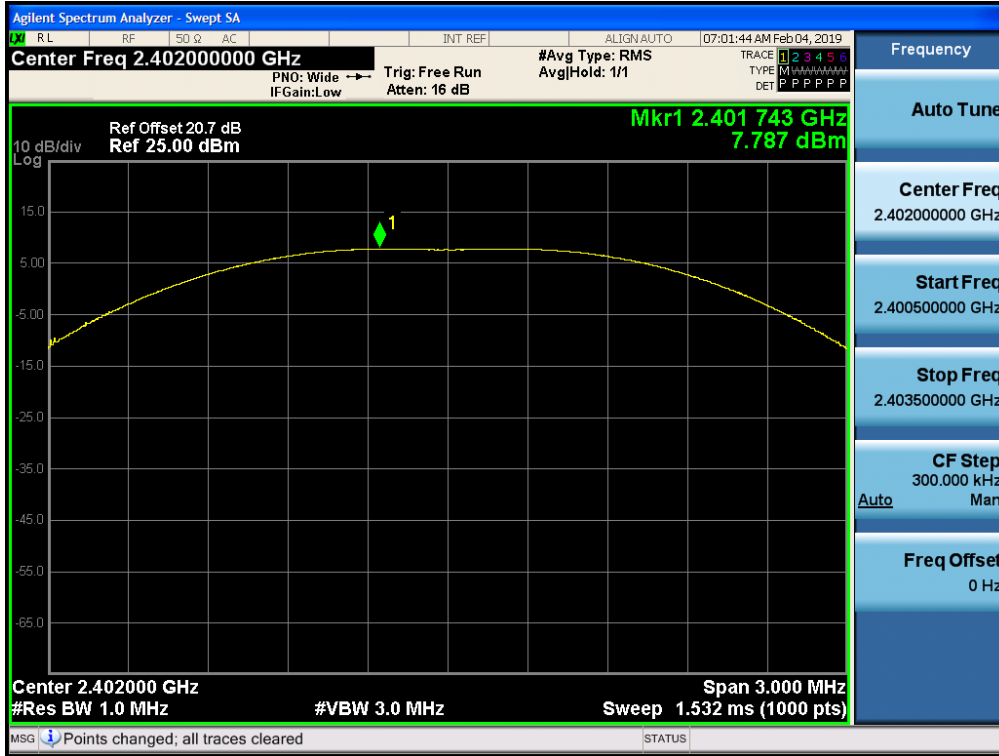

Conducted Output Power (Mid-CH 19)

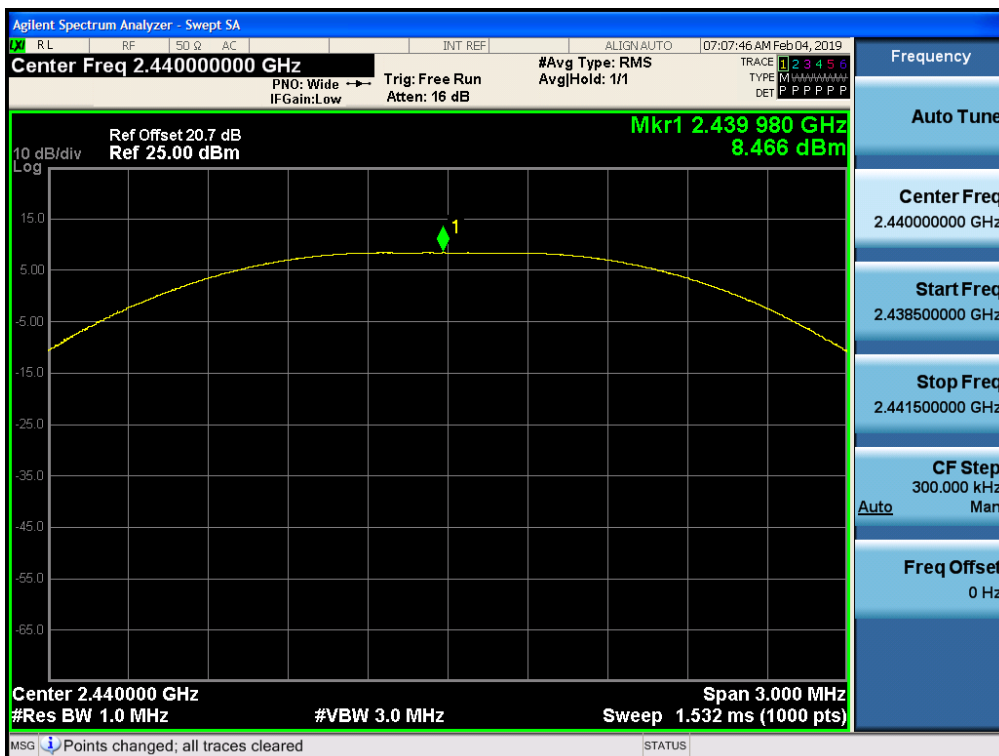


Conducted Output Power (High-CH 39)

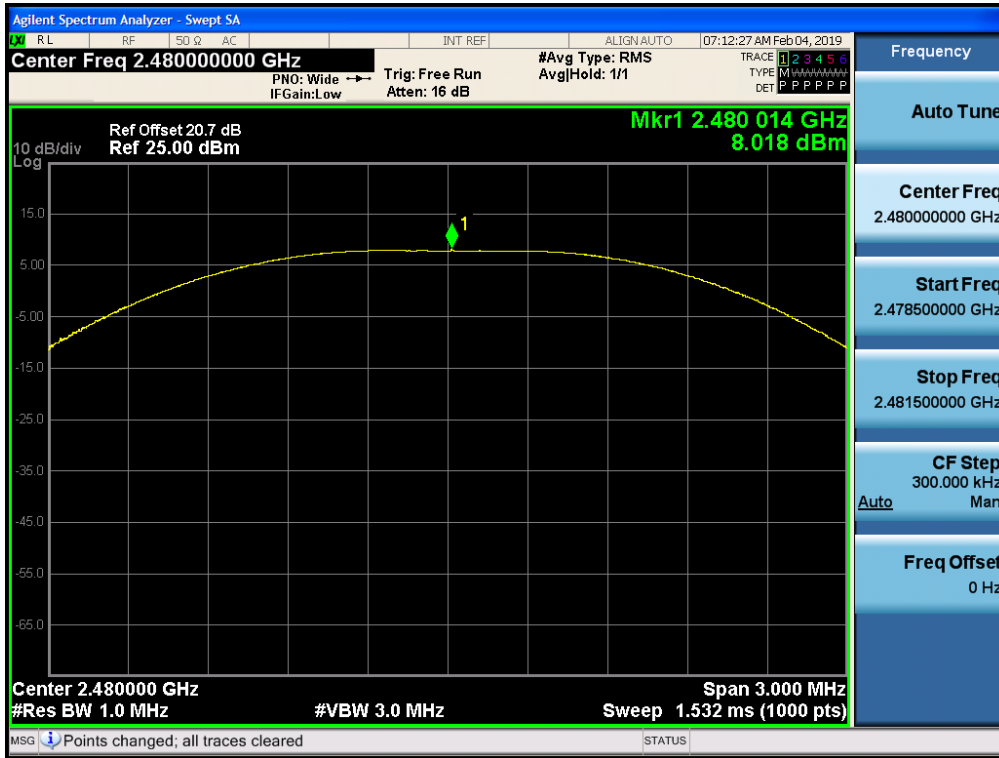


Average Power


Conducted Output Power (Low-CH 0)

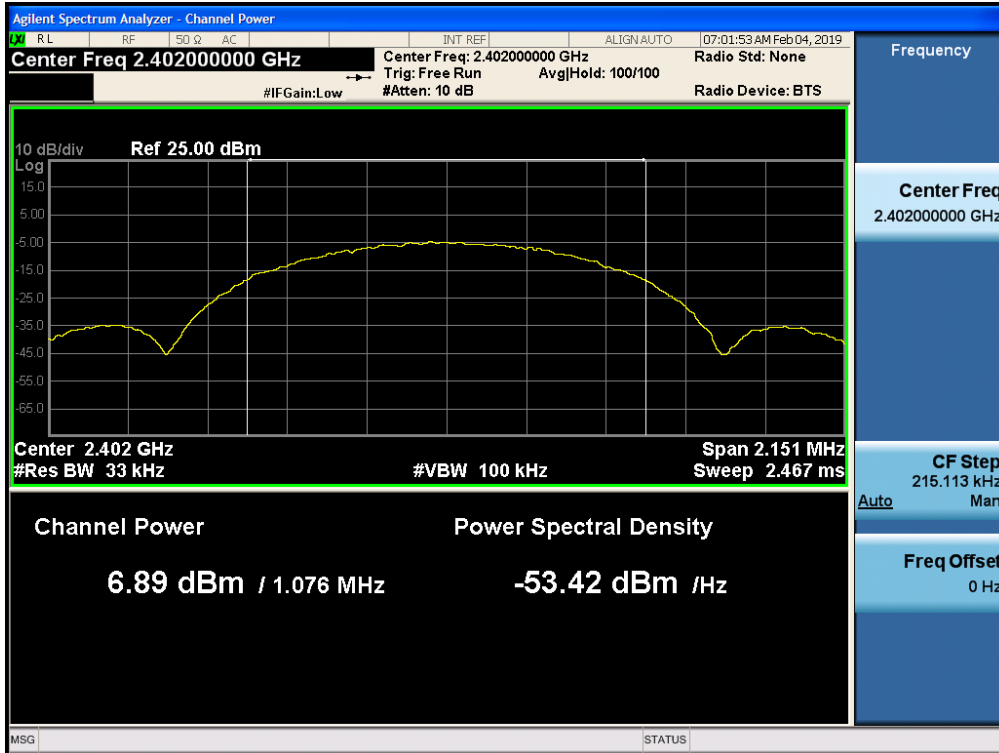

Conducted Output Power (Mid-CH 19)

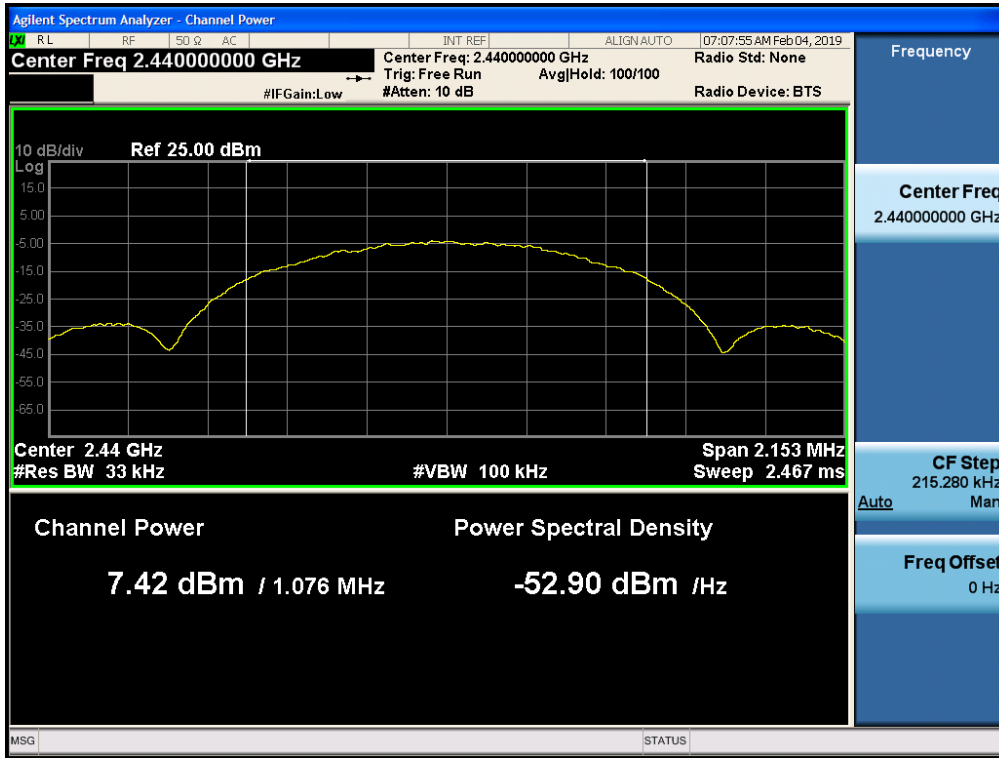

Conducted Output Power (High-CH 39)

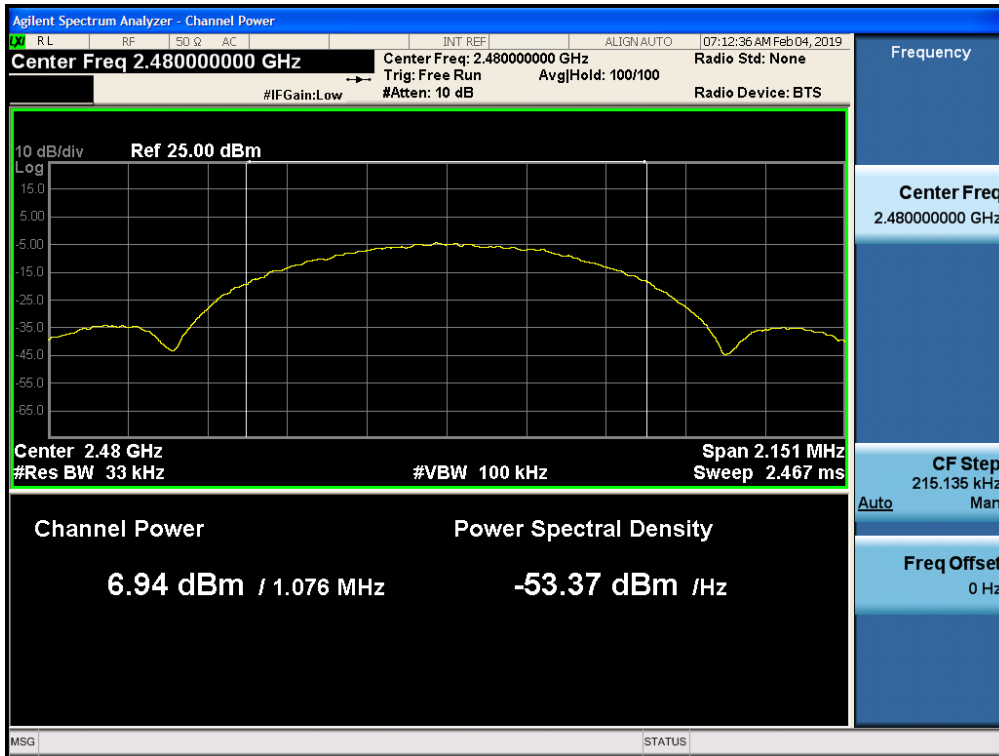

Note:

Plot of worst case are only reported.

9.4 POWER SPECTRAL DENSITY


Frequency (MHz)	Channel No.	Packet length (Byte)	Test Result			
			Measured PSD	Duty Cycle Factor	Avg. PSD	Limit
			(dBm)	(dB)	(dBm)	(dBm)
2402	0	37	-9.006	2.05	-6.956	8
2440	19		-9.948	2.05	-7.898	
2480	39		-8.874	2.05	-6.824	
2402	0	255	-12.400	0.69	-11.710	
2440	19		-12.747	0.69	-12.057	
2480	39		-13.413	0.69	-12.723	

Note :


1. Spectrum reading values are not plot data.
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.70 dB is offset for 2.4 GHz Band.

■ 1M Bit/s 37 Byte Test Plots


Power Spectral Density (Low-CH 0)

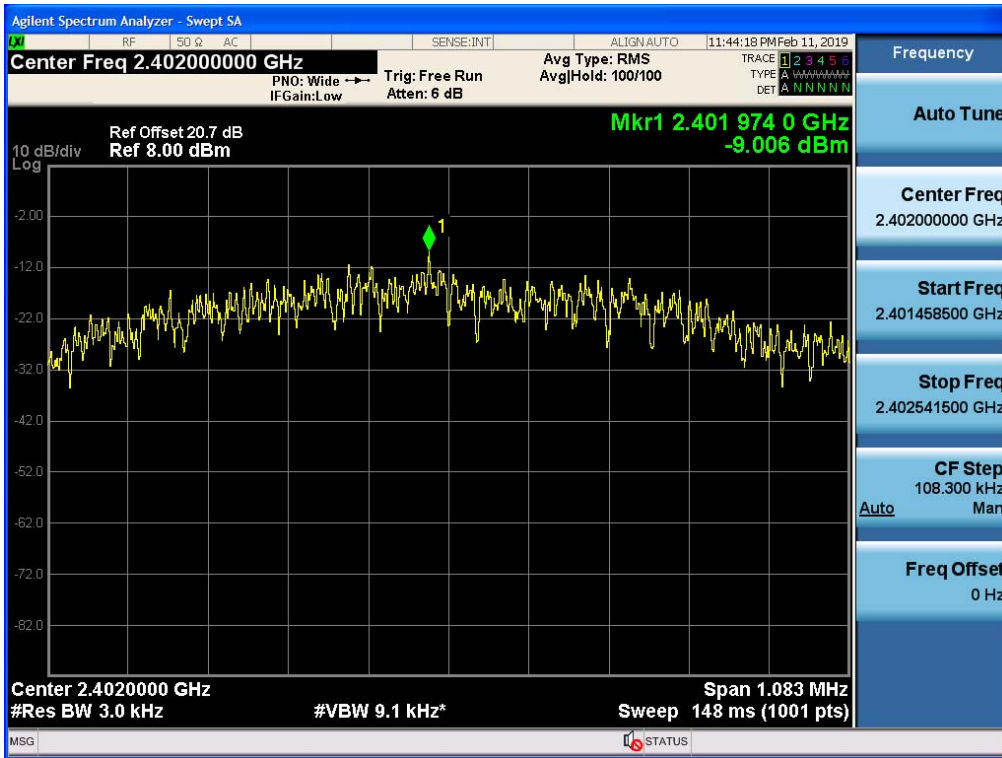

Power Spectral Density (Mid-CH 19)

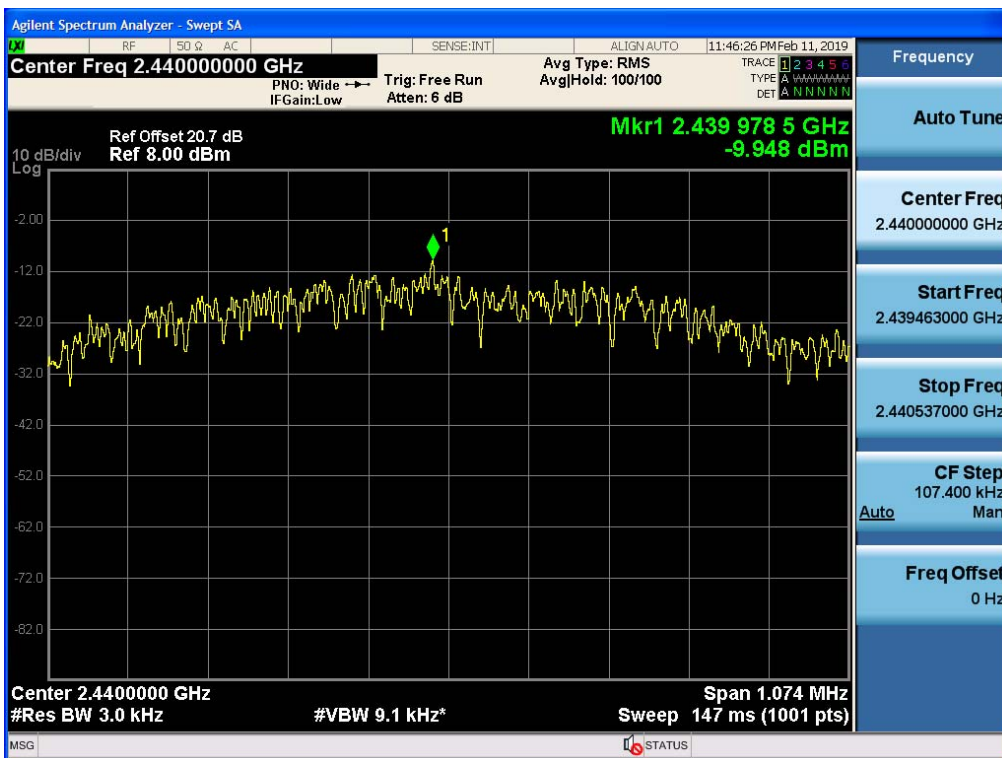

Power Spectral Density (High-CH 39)

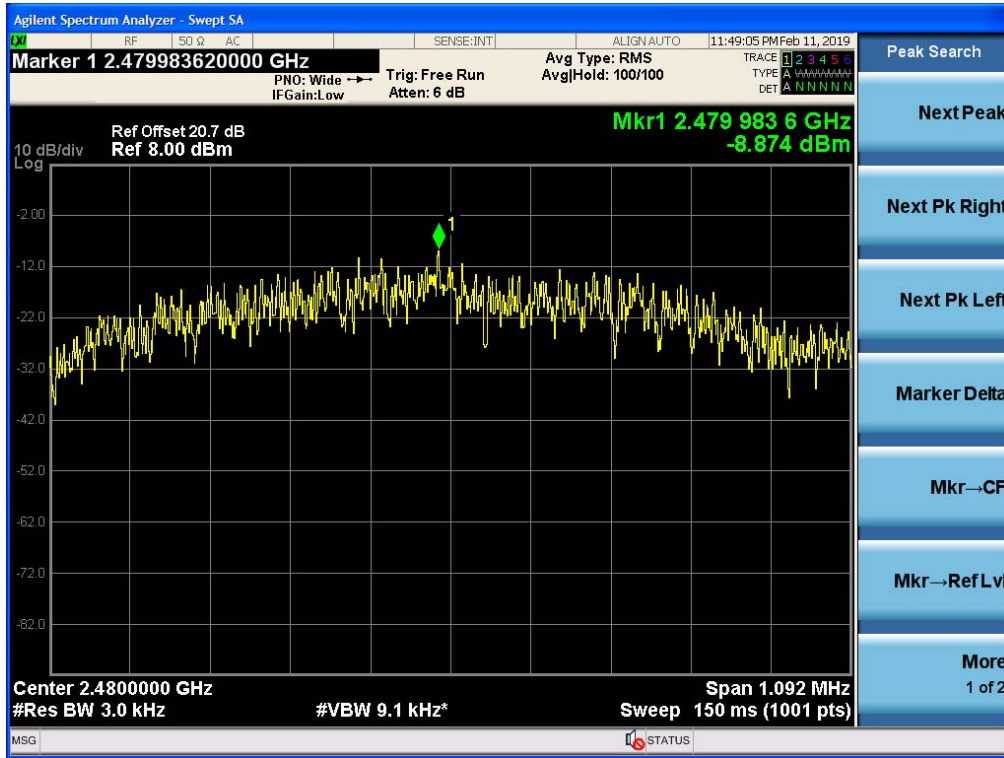


9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

1M Bit/s 255 Byte Test Plots (BandEdge)

Low-CH 0

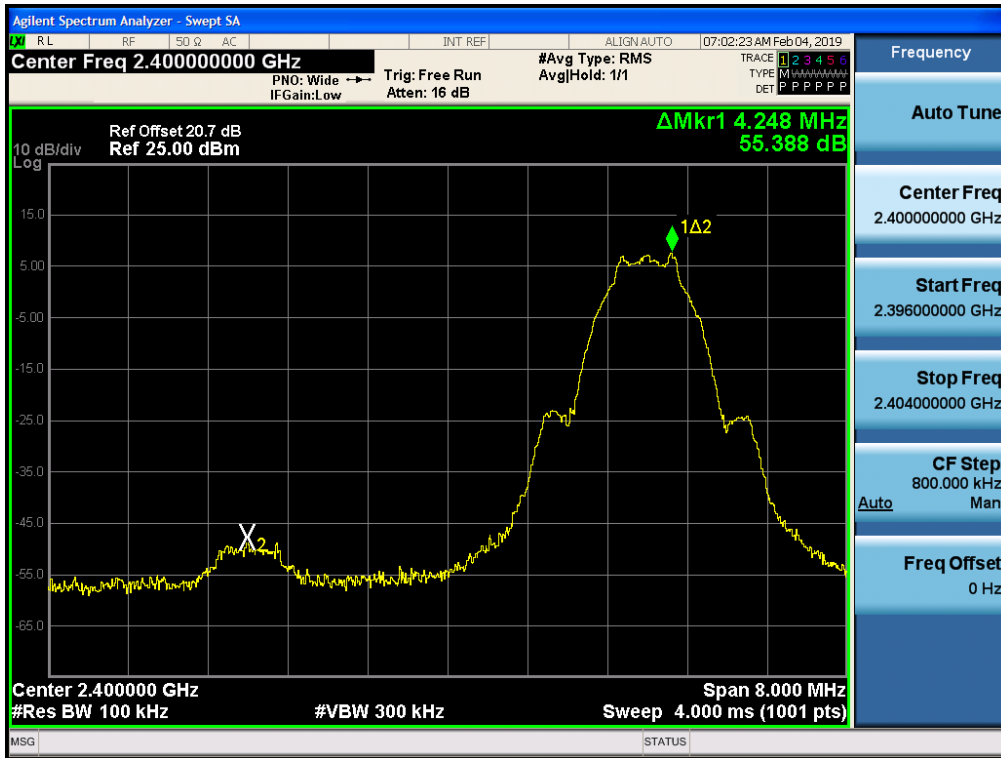


High-CH 39

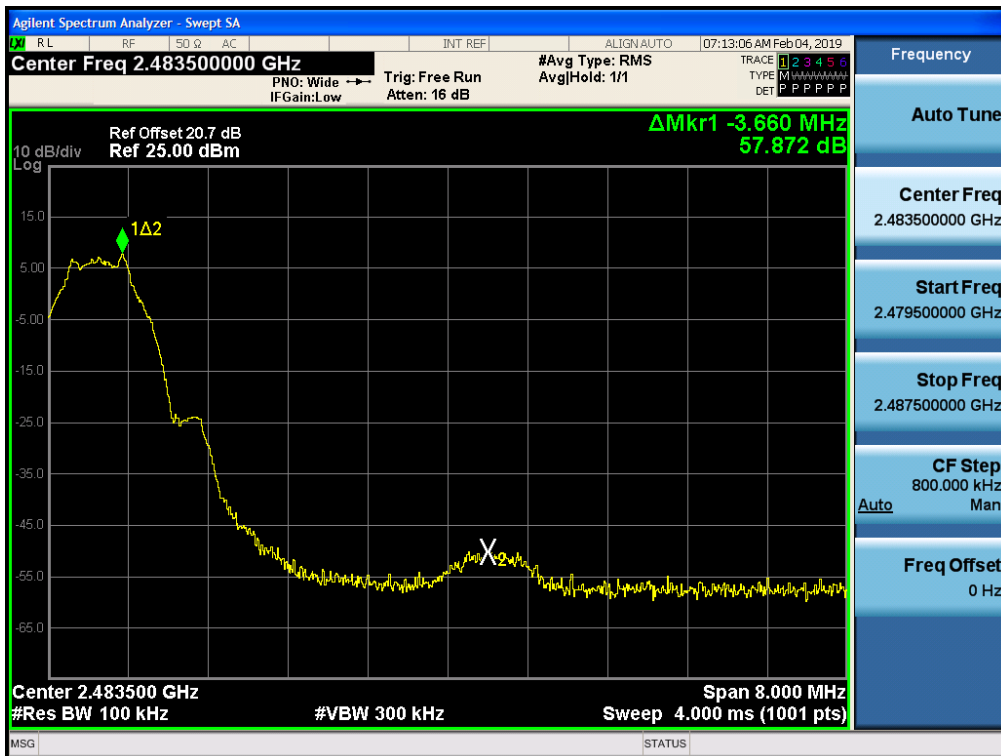

■ 1M Bit/s 255 Byte Test Plots (Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (Mid-CH 19)

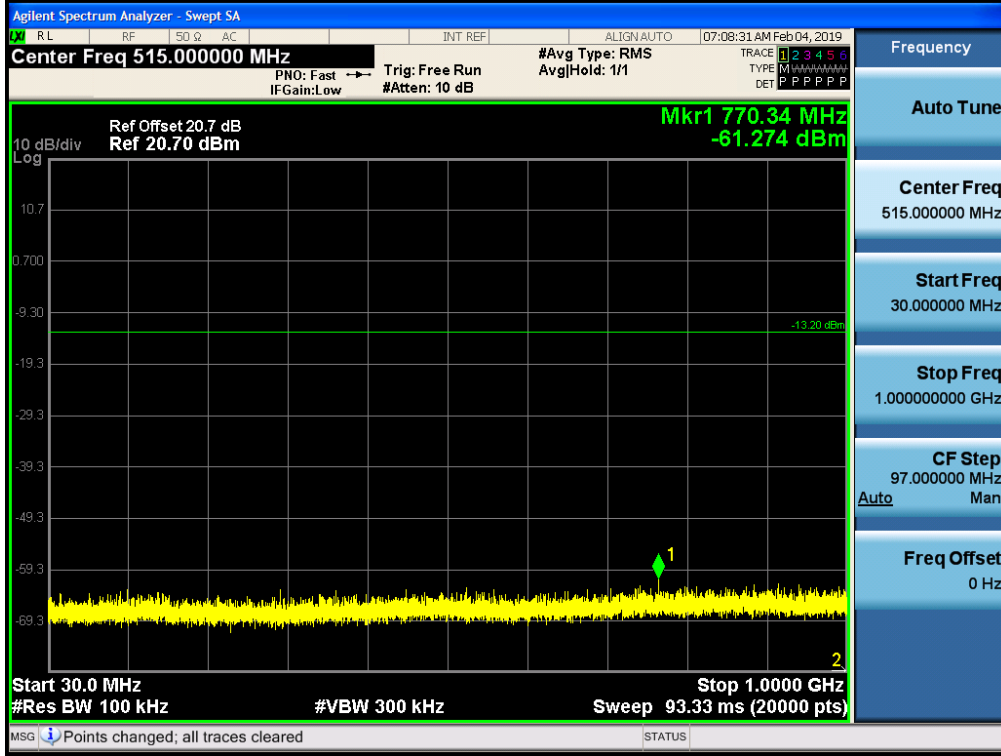


1 GHz ~ 3 GHz

Conducted Spurious Emission (Mid-CH 19)

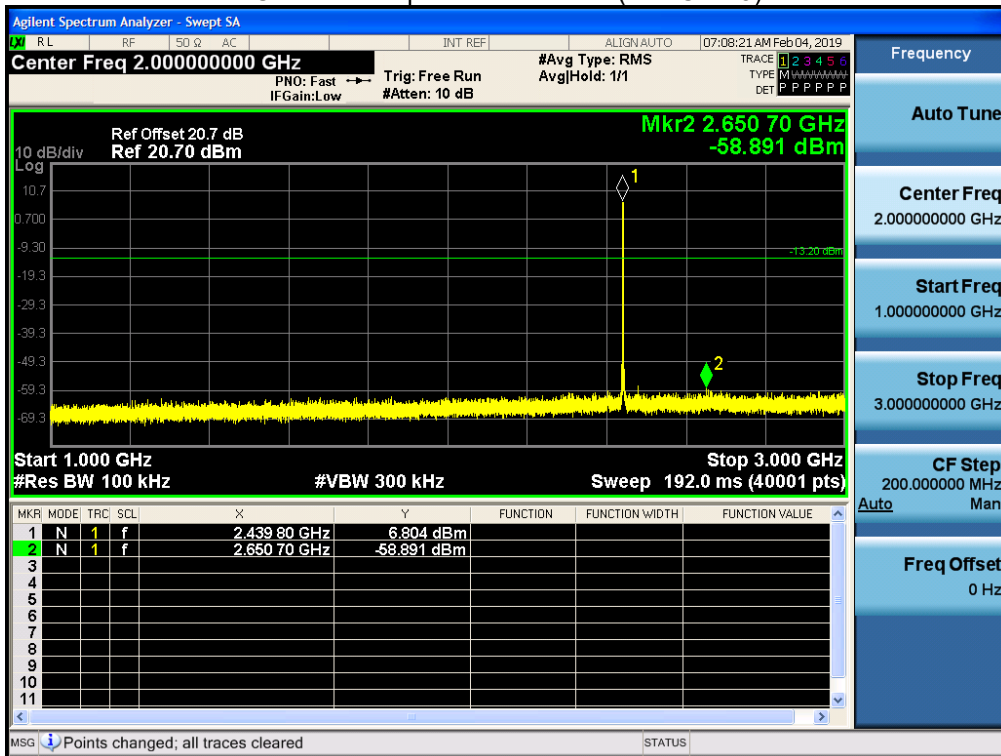


3 GHz ~ 5 GHz

Conducted Spurious Emission (Mid-CH 19)

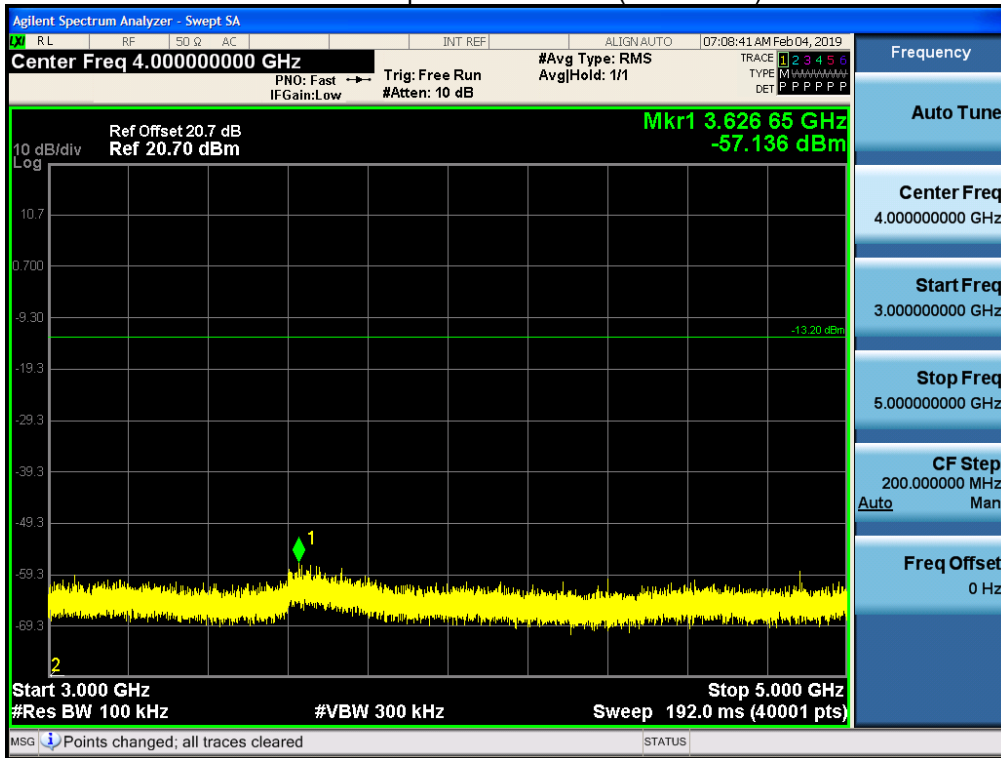


5 GHz ~ 7 GHz

Conducted Spurious Emission (Mid-CH 19)

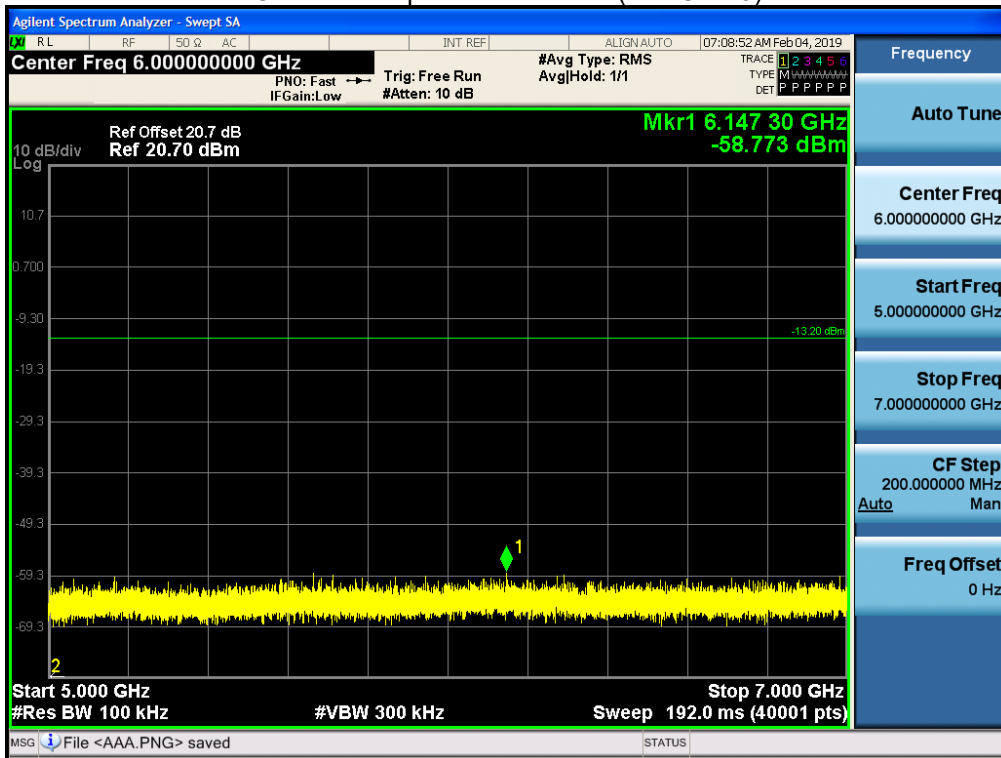


7 GHz ~ 9 GHz

Conducted Spurious Emission (Mid-CH 19)

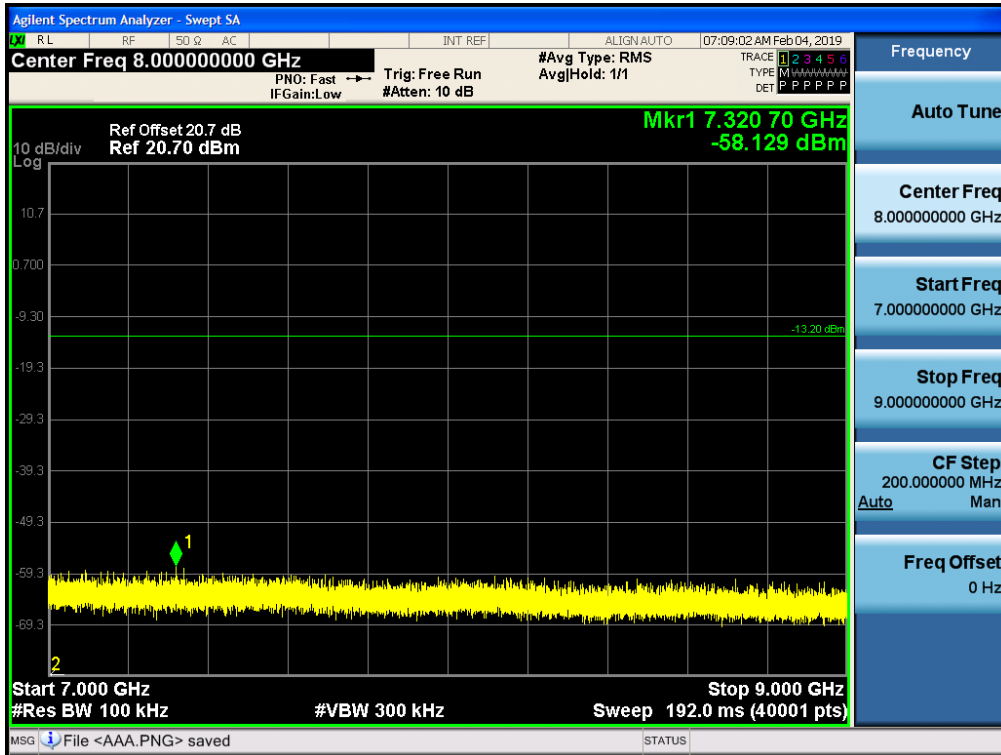


9 GHz ~ 11 GHz

Conducted Spurious Emission (Mid-CH 19)

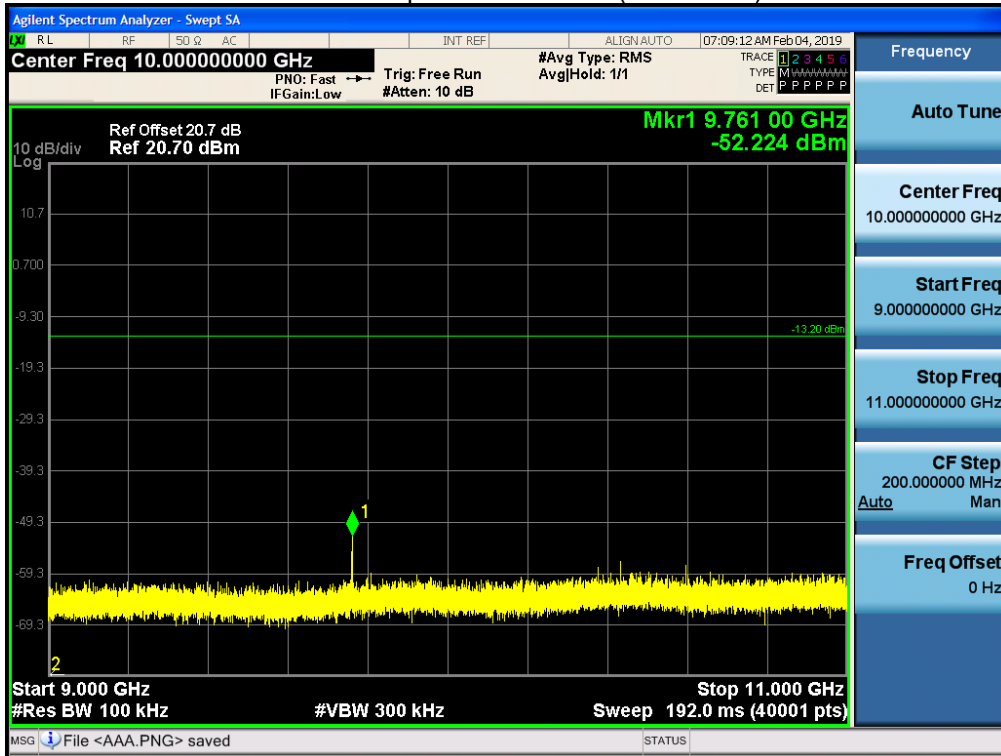


11 GHz ~ 13 GHz

Conducted Spurious Emission (Mid-CH 19)

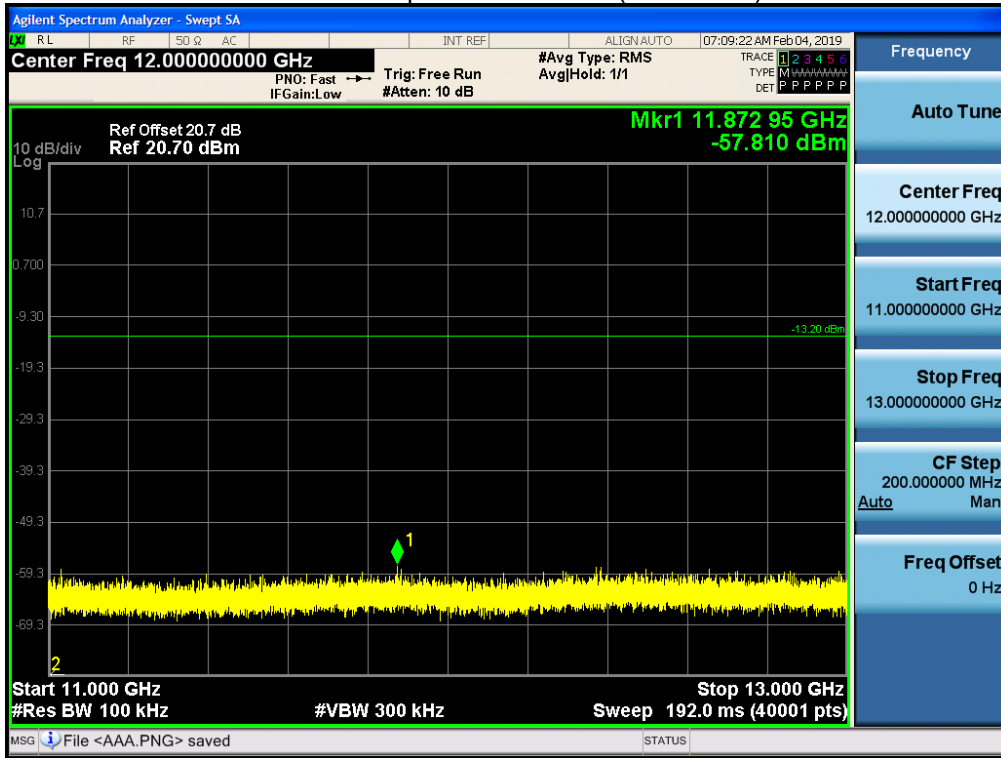


13 GHz ~ 15 GHz

Conducted Spurious Emission (Mid-CH 19)

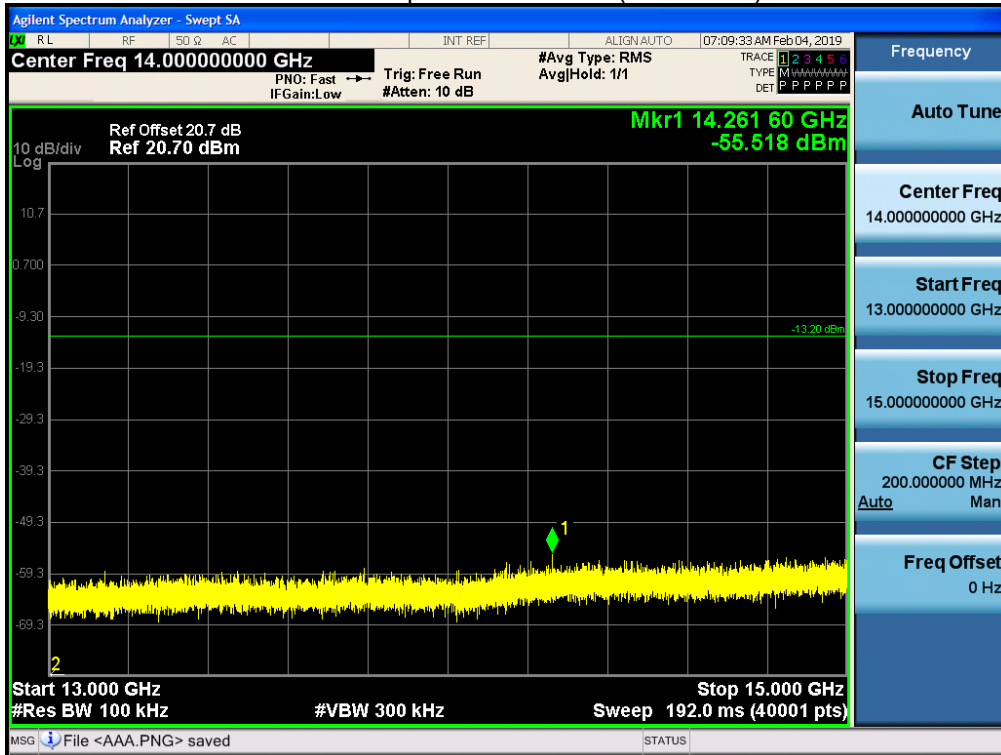


15 GHz ~ 17 GHz

Conducted Spurious Emission (Mid-CH 19)

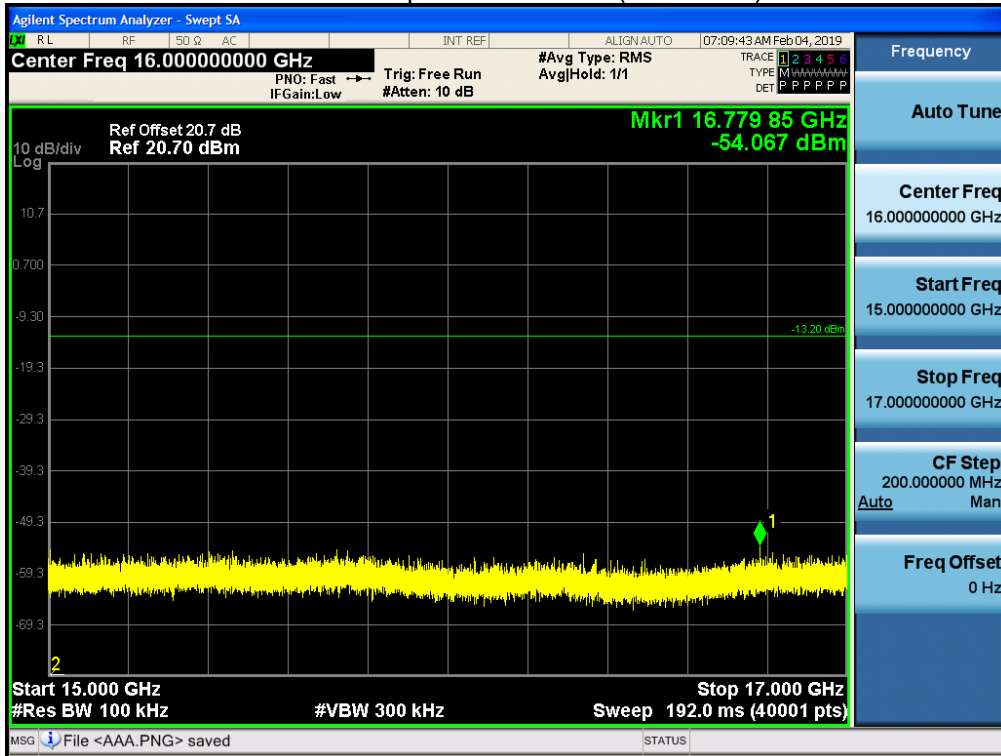


17 GHz ~ 19 GHz

Conducted Spurious Emission (Mid-CH 19)

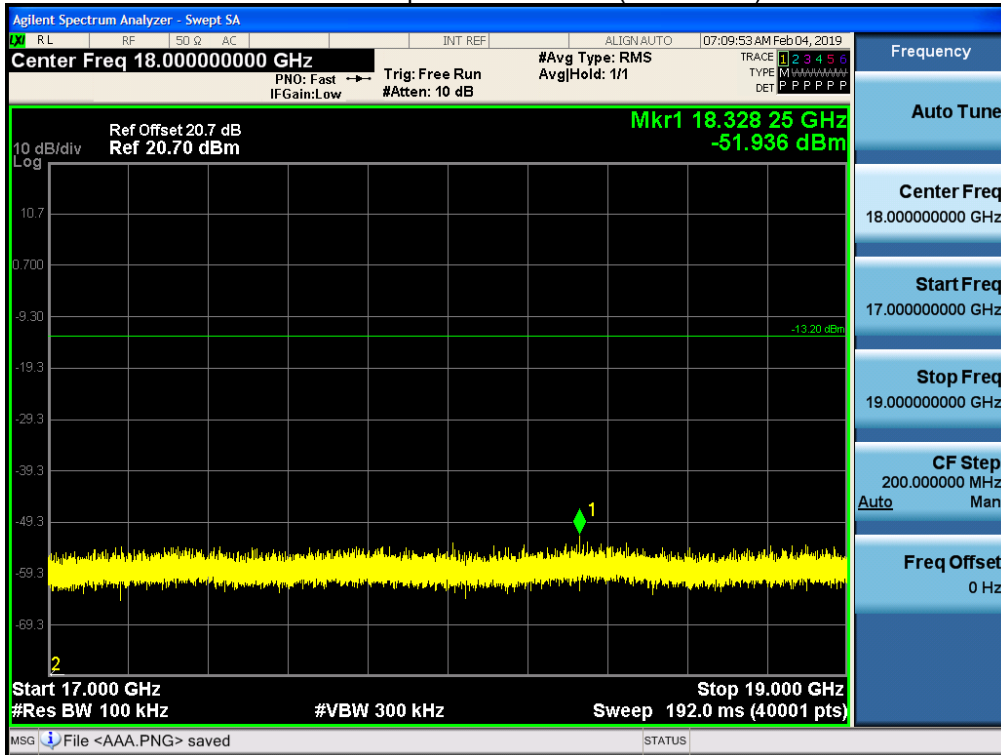


19 GHz ~ 21 GHz

Conducted Spurious Emission (Mid-CH 19)

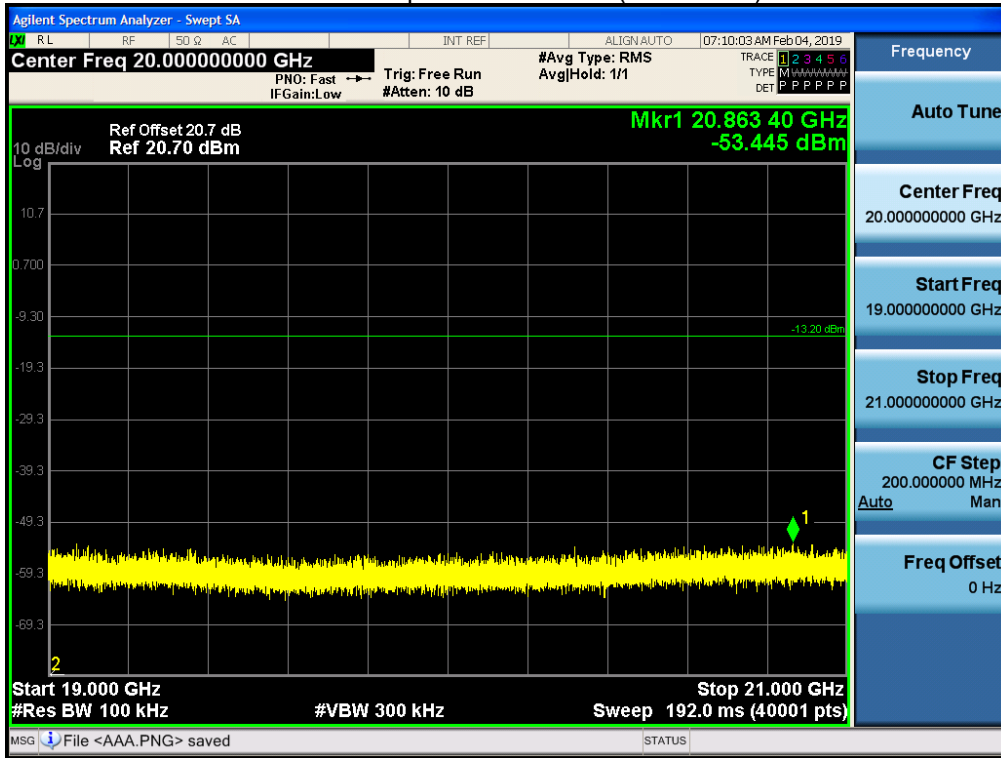


21 GHz ~ 23 GHz

Conducted Spurious Emission (Mid-CH 19)

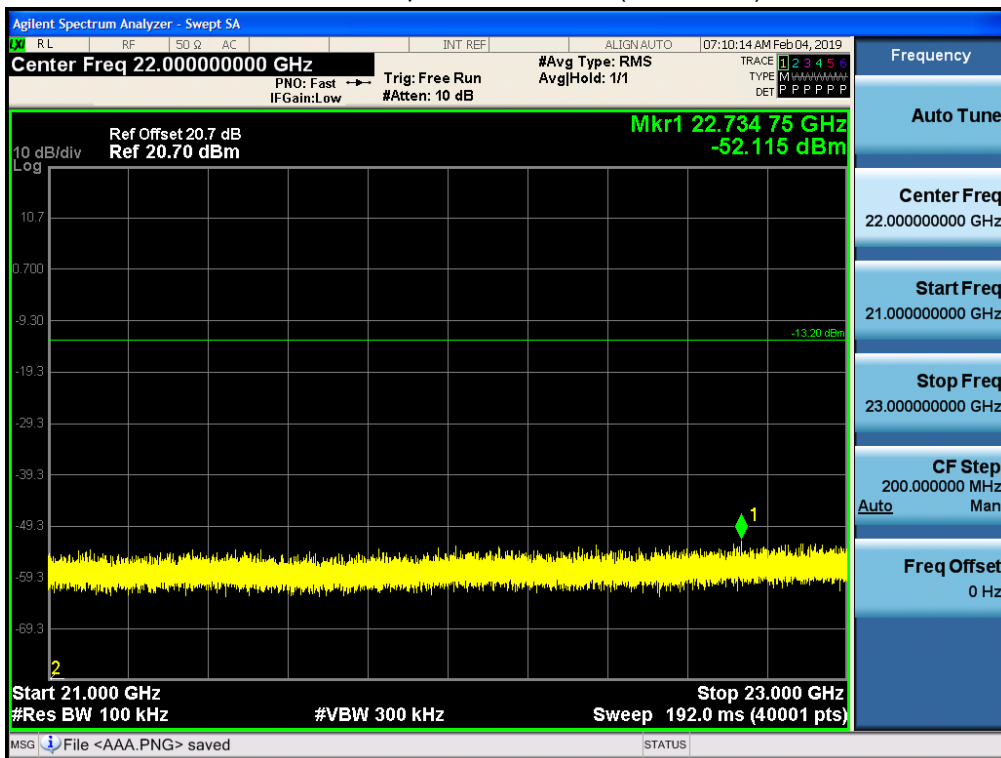

23 GHz ~ 25 GHz

Conducted Spurious Emission (Mid-CH 19)

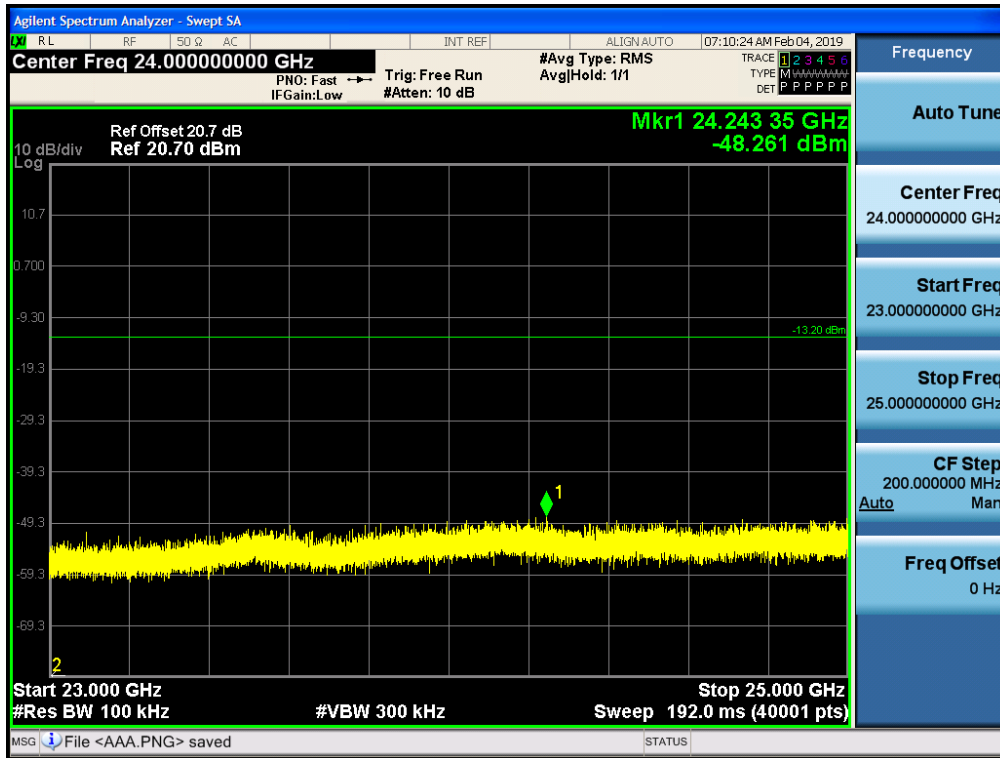

[NOTE]

The test limit is 30dBc, But The limit line in the plot is 20 dBc. Because that was worst case limit.

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40 \cdot \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.
5. The test results for below 30 MHz is correlated to an open site.
The result on Open field site is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Mode : 1M Bit/s 37 Byte

Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	51.14	0	1.83	V	52.97	73.98	21.01	PK
4804	39.65	2.05	1.83	V	43.53	53.98	10.45	AV
7206	50.03	0	9.65	V	59.68	73.98	14.30	PK
7206	37.84	2.05	9.65	V	49.54	53.98	4.44	AV
4804	51.22	0	1.83	H	53.05	73.98	20.93	PK
4804	38.73	2.05	1.83	H	42.61	53.98	11.37	AV
7206	49.88	0	9.65	H	59.53	73.98	14.45	PK
7206	36.33	2.05	9.65	H	48.03	53.98	5.95	AV

Operation Mode: CH Mid

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	51.26	0	2.34	V	53.6	73.98	20.38	PK
4880	38.59	2.05	2.34	V	42.98	53.98	11.00	AV
7320	49.90	0	9.98	V	59.88	73.98	14.10	PK
7320	37.77	2.05	9.98	V	49.8	53.98	4.18	AV
4880	50.02	0	2.34	H	52.36	73.98	21.62	PK
4880	38.42	2.05	2.34	H	42.81	53.98	11.17	AV
7320	49.74	0	9.98	H	59.72	73.98	14.26	PK
7320	36.51	2.05	9.98	H	48.54	53.98	5.44	AV

Operation Mode: CH High

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.49	0	2.26	V	52.75	73.98	21.23	PK
4960	38.45	2.05	2.26	V	42.76	53.98	11.22	AV
7440	49.43	0	9.78	V	59.21	73.98	14.77	PK
7440	37.36	2.05	9.78	V	49.19	53.98	4.79	AV
4960	49.74	0	2.26	H	52	73.98	21.98	PK
4960	38.12	2.05	2.26	H	42.43	53.98	11.55	AV
7440	48.66	0	9.78	H	58.44	73.98	15.54	PK
7440	37.29	2.05	9.78	H	49.12	53.98	4.86	AV

Mode : 1M Bit/s 255 Byte

Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	49.90	0	1.83	V	51.73	73.98	22.25	PK
4804	37.79	0.69	1.83	V	40.31	53.98	13.67	AV
7206	50.00	0	9.65	V	59.65	73.98	14.33	PK
7206	37.95	0.69	9.65	V	48.29	53.98	5.69	AV
4804	48.69	0	1.83	H	50.52	73.98	23.46	PK
4804	37.61	0.69	1.83	H	40.13	53.98	13.85	AV
7206	48.99	0	9.65	H	58.64	73.98	15.34	PK
7206	36.24	0.69	9.65	H	46.58	53.98	7.40	AV

Operation Mode: CH Mid


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	50.72	0	2.34	V	53.06	73.98	20.92	PK
4880	38.68	0.69	2.34	V	41.71	53.98	12.27	AV
7320	49.73	0	9.98	V	59.71	73.98	14.27	PK
7320	37.71	0.69	9.98	V	48.38	53.98	5.60	AV
4880	50.16	0	2.34	H	52.5	73.98	21.48	PK
4880	38.61	0.69	2.34	H	41.64	53.98	12.34	AV
7320	48.63	0	9.98	H	58.61	73.98	15.37	PK
7320	36.52	0.69	9.98	H	47.19	53.98	6.79	AV

Operation Mode: CH High

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.08	0	2.26	V	52.34	73.98	21.64	PK
4960	38.51	0.69	2.26	V	41.46	53.98	12.52	AV
7440	49.92	0	9.78	V	59.7	73.98	14.28	PK
7440	37.32	0.69	9.78	V	47.79	53.98	6.19	AV
4960	49.85	0	2.26	H	52.11	73.98	21.87	PK
4960	38.43	0.69	2.26	H	41.38	53.98	12.60	AV
7440	48.93	0	9.78	H	58.71	73.98	15.27	PK
7440	37.02	0.69	9.78	H	47.49	53.98	6.49	AV


■ 1M Bit/s 37 Byte Test Plots (Worst case : Z-V)

Radiated Spurious Emissions plot – Average Reading (Ch.19 3rd Harmonic)

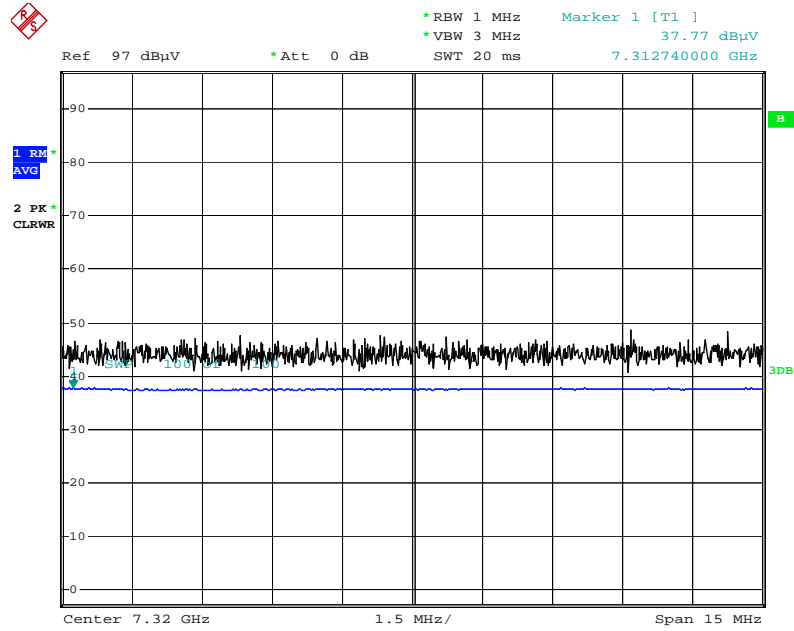

Date: 4.FEB.2019 14:10:55

Radiated Spurious Emissions plot – Peak Reading (Ch.19 3rd Harmonic)

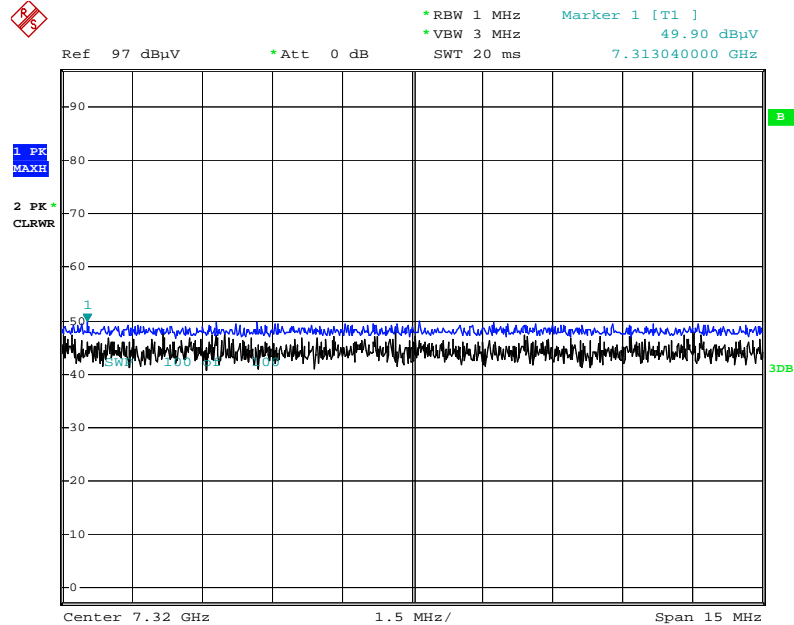

Date: 4.FEB.2019 14:10:38

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Mode : 1M Bit/s 37 Byte

Operating Frequency 2402 MHz
 Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	20.39	0.00	35.09	H	55.48	73.98	18.50	PK
2390.0	10.14	2.05	35.09	H	47.28	53.98	6.70	AV
2390.0	19.86	0.00	35.09	V	54.95	73.98	19.03	PK
2390.0	10.05	2.05	35.09	V	47.19	53.98	6.79	AV

Operating Frequency 2480 MHz
 Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	22.66	0.00	35.11	H	57.77	73.98	16.21	PK
2483.5	11.08	2.05	35.11	H	48.24	53.98	5.74	AV
2483.5	22.13	0.00	35.11	V	57.24	73.98	16.74	PK
2483.5	10.96	2.05	35.11	V	48.12	53.98	5.86	AV

Mode : 1M Bit/s 255 Byte

Operating Frequency 2402 MHz
 Channel No. 0


Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	21.50	0.00	35.09	H	56.59	73.98	17.39	PK
2390.0	10.17	0.69	35.09	H	45.95	53.98	8.03	AV
2390.0	21.17	0.00	35.09	V	56.26	73.98	17.72	PK
2390.0	10.14	0.69	35.09	V	45.92	53.98	8.06	AV

Operating Frequency 2480 MHz
 Channel No. 39


Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	22.96	0.00	35.11	H	58.07	73.98	15.91	PK
2483.5	11.14	0.69	35.11	H	46.94	53.98	7.04	AV
2483.5	21.64	0.00	35.11	V	56.75	73.98	17.23	PK
2483.5	11.02	0.69	35.11	V	46.82	53.98	7.16	AV

Mode : 1M Bit/s 37 Byte Test Plots (Worst case : X-H)

Radiated Restricted Band Edges plot – Average Reading (Ch.39)

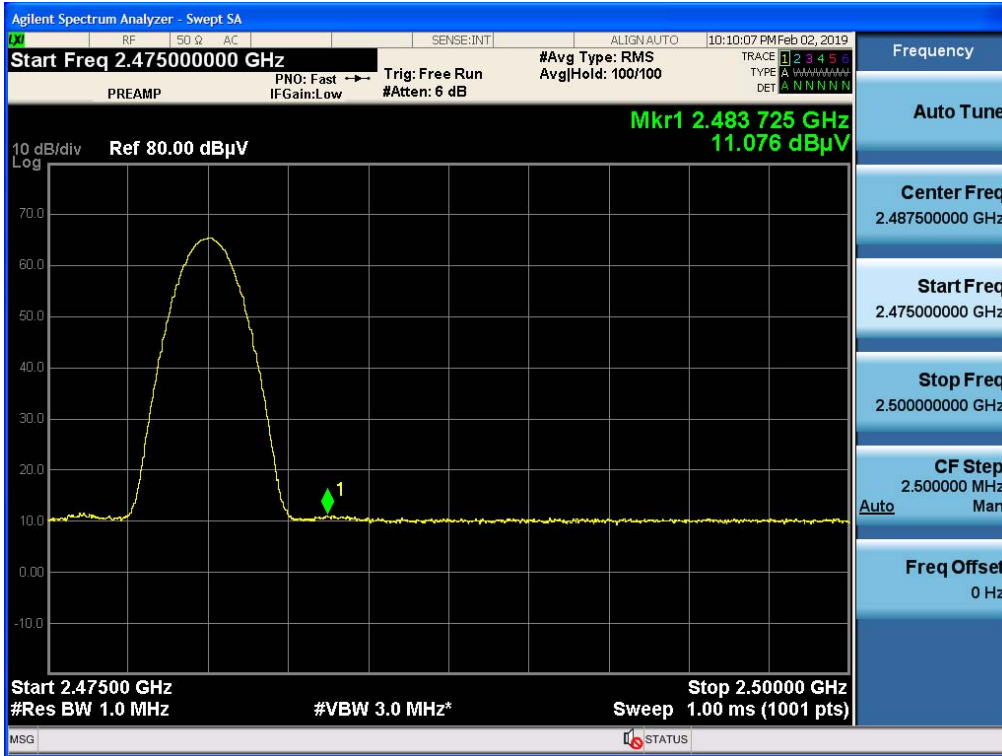

Radiated Restricted Band Edges plot – Peak Reading (Ch.39)

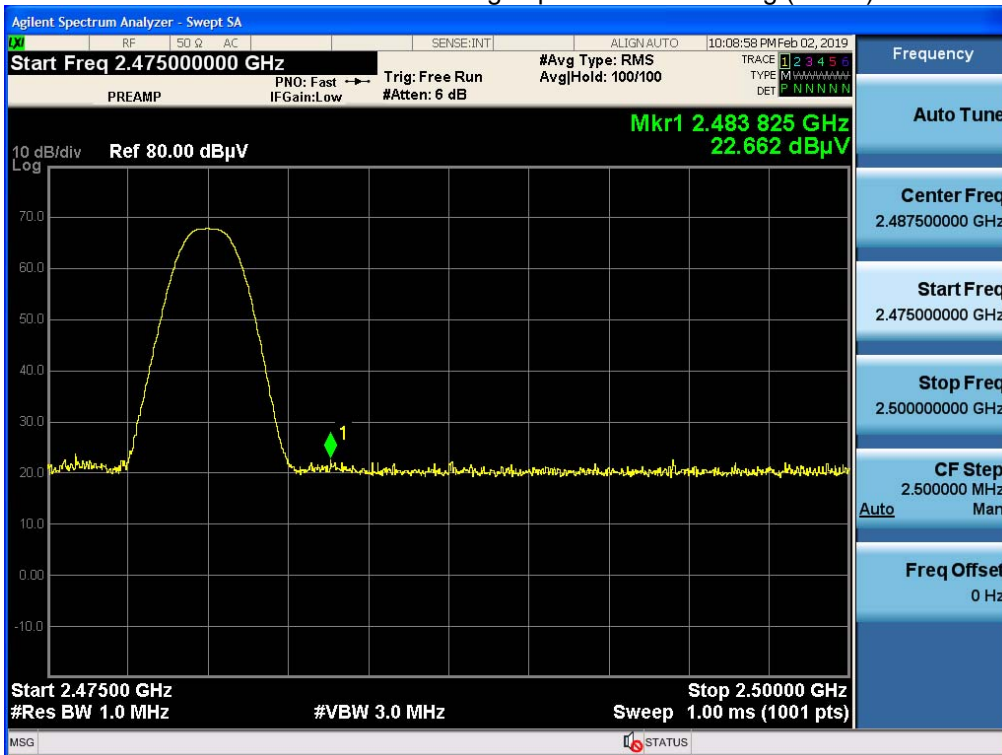

Note:

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

BT(LE)_N


1 / 2

HCT TEST Report

Common Information

EUT: SM-M105M/DS
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: BT(LE)_N

FCC CLASS B_Exten Cable

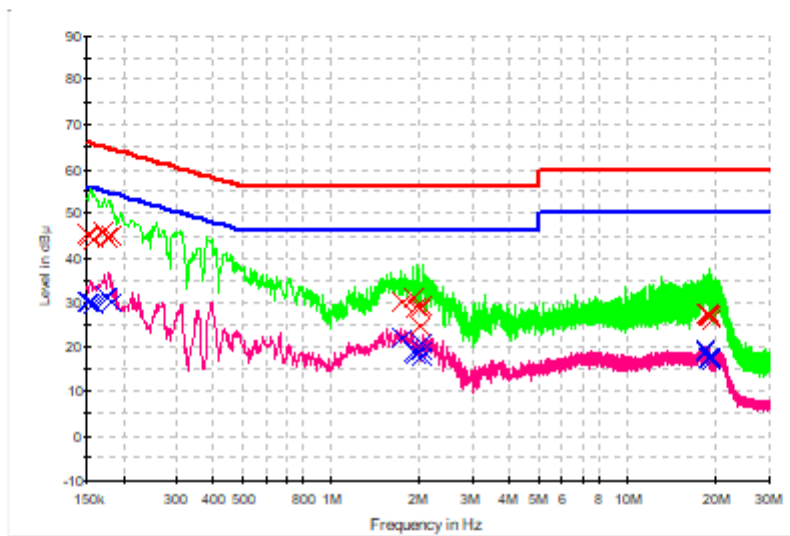

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
— Preview Result 2-AVG x Final Result 1-QPK x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	45.4	9.000	Off	N	9.8	20.6	66.0
0.154000	44.9	9.000	Off	N	9.8	20.9	65.8
0.158000	44.2	9.000	Off	N	9.8	21.4	65.6
0.170000	45.9	9.000	Off	N	9.8	19.1	65.0
0.176000	44.6	9.000	Off	N	9.8	20.1	64.7
0.180000	45.0	9.000	Off	N	9.8	19.5	64.5
1.720000	30.1	9.000	Off	N	10.1	25.9	56.0
1.900000	30.9	9.000	Off	N	10.0	25.1	56.0
1.948000	28.9	9.000	Off	N	10.0	27.1	56.0
1.982000	28.5	9.000	Off	N	10.0	27.5	56.0
1.996000	24.6	9.000	Off	N	10.0	31.4	56.0
2.040000	29.2	9.000	Off	N	10.0	26.8	56.0
18.634000	27.3	9.000	Off	N	10.8	32.7	60.0
18.750000	26.9	9.000	Off	N	10.8	33.1	60.0
18.820000	27.7	9.000	Off	N	10.8	32.3	60.0
18.928000	27.1	9.000	Off	N	10.8	32.9	60.0
19.052000	26.9	9.000	Off	N	10.8	33.1	60.0
19.330000	26.2	9.000	Off	N	10.9	33.8	60.0

2019-02-04

오후 3:35:00

BT(LE)_N

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	30.1	9.000	Off	N	9.8	25.9	56.0
0.154000	29.9	9.000	Off	N	9.8	25.9	55.8
0.158000	29.6	9.000	Off	N	9.8	26.0	55.6
0.172000	31.4	9.000	Off	N	9.8	23.4	54.9
0.176000	31.2	9.000	Off	N	9.8	23.5	54.7
0.180000	30.0	9.000	Off	N	9.8	24.4	54.5
1.720000	21.8	9.000	Off	N	10.1	24.2	46.0
1.902000	18.9	9.000	Off	N	10.0	27.1	46.0
1.946000	18.5	9.000	Off	N	10.0	27.5	46.0
2.028000	19.3	9.000	Off	N	10.0	26.7	46.0
2.040000	20.8	9.000	Off	N	10.0	25.2	46.0
2.048000	17.9	9.000	Off	N	10.0	28.1	46.0
18.300000	18.9	9.000	Off	N	10.8	31.1	50.0
18.380000	19.4	9.000	Off	N	10.8	30.6	50.0
18.750000	17.5	9.000	Off	N	10.8	32.5	50.0
19.052000	18.0	9.000	Off	N	10.8	32.0	50.0
19.118000	17.4	9.000	Off	N	10.8	32.6	50.0
19.330000	17.3	9.000	Off	N	10.9	32.7	50.0

2019-02-04

오후 3:35:00

Conducted Emissions (Line 2)

BT(LE)_L1


1 / 2

HCT TEST Report

Common Information

EUT: SM-M105M/DS
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: BT(LE)_L1

FCC CLASS B_Exten Cable

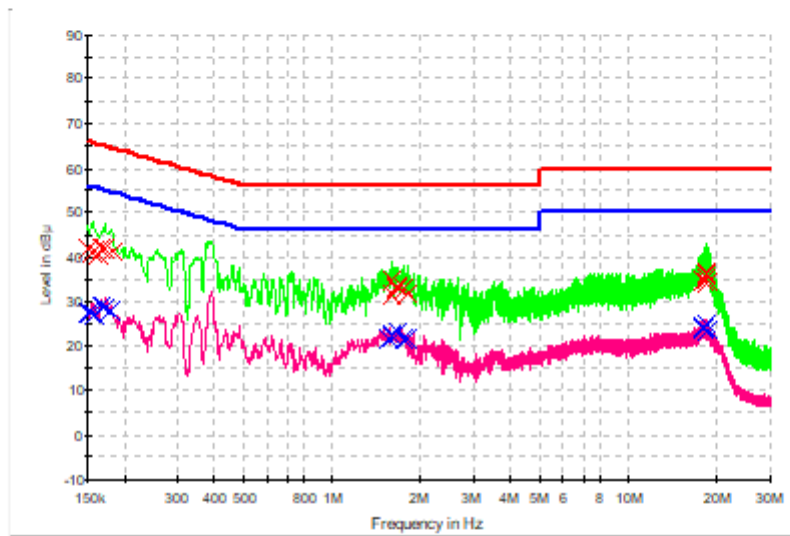

— FCC CLASS B -QP — FCC CLASS B -AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	41.3	9.000	Off	L1	9.7	24.1	66.0
0.156000	41.0	9.000	Off	L1	9.7	24.7	65.7
0.162000	40.5	9.000	Off	L1	9.7	24.9	65.4
0.166000	42.0	9.000	Off	L1	9.7	23.1	65.2
0.170000	41.8	9.000	Off	L1	9.7	23.1	65.0
0.180000	41.2	9.000	Off	L1	9.7	23.3	64.5
1.586000	31.5	9.000	Off	L1	9.9	24.5	56.0
1.600000	34.7	9.000	Off	L1	9.9	21.3	56.0
1.650000	33.4	9.000	Off	L1	9.9	22.6	56.0
1.656000	33.1	9.000	Off	L1	9.9	22.9	56.0
1.744000	32.9	9.000	Off	L1	9.9	23.1	56.0
1.796000	31.6	9.000	Off	L1	9.9	24.4	56.0
17.958000	34.9	9.000	Off	L1	10.5	25.1	60.0
18.290000	35.1	9.000	Off	L1	10.5	24.9	60.0
18.326000	36.3	9.000	Off	L1	10.5	23.7	60.0
18.332000	36.2	9.000	Off	L1	10.5	23.8	60.0
18.342000	35.1	9.000	Off	L1	10.5	24.9	60.0
18.492000	34.5	9.000	Off	L1	10.5	25.5	60.0

2019-02-04

오후 3:46:26

BT(LE)_L1

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	27.7	9.000	Off	L1	9.7	28.3	56.0
0.154000	27.3	9.000	Off	L1	9.7	28.4	55.8
0.158000	27.0	9.000	Off	L1	9.7	28.6	55.6
0.166000	28.8	9.000	Off	L1	9.7	26.3	55.2
0.170000	28.8	9.000	Off	L1	9.7	26.2	55.0
0.178000	28.0	9.000	Off	L1	9.7	26.6	54.6
1.554000	21.7	9.000	Off	L1	9.9	24.3	46.0
1.590000	22.1	9.000	Off	L1	9.9	23.9	46.0
1.596000	22.6	9.000	Off	L1	9.9	23.4	46.0
1.662000	23.0	9.000	Off	L1	9.9	23.0	46.0
1.744000	21.6	9.000	Off	L1	9.9	24.4	46.0
1.796000	21.5	9.000	Off	L1	9.9	24.5	46.0
17.958000	23.8	9.000	Off	L1	10.5	26.2	50.0
18.026000	24.4	9.000	Off	L1	10.5	25.6	50.0
18.320000	25.1	9.000	Off	L1	10.5	24.9	50.0
18.326000	25.0	9.000	Off	L1	10.5	25.0	50.0
18.492000	23.7	9.000	Off	L1	10.5	26.3	50.0
18.496000	23.6	9.000	Off	L1	10.5	26.4	50.0

2019-02-04

오후 3:46:26

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/27/2018	Annual	100033
ESPAC	SU-642 /Temperature Chamber	03/30/2018	Annual	0093008124
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY52090906
Agilent	N1911A / Power Meter	04/16/2018	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/16/2018	Annual	MY52260025
Hewlett Packard	11667B / Power Splitter	06/07/2018	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/26/2018	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2018	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/17/2018	Annual	100422
MCE/Weinschel	2-20/ Attenuator(20 dB)	10/26/2018	Annual	BR0592

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/09/2018	Annual	3368
Schwarzbeck	BBHA 9120D / Horn Antenna	06/30/2017	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 40 GHz) / Spectrum Analyzer	07/24/2018	Annual	100843
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	01/03/2019	Annual	F6
Wainwright Instruments	WHFX7.0/18G-8SS / High Pass Filter	05/09/2018	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/29/2018	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Weinschel	2-3 / Attenuator (3 dB)	10/10/2018	Annual	BR0617
H+S	5910-N-50-010 / Attenuator(10 dB)	11/08/2018	Annual	NONE
CERNEX	CBLU1183540B-01 / Power Amplifier	12/21/2018	Annual	25540
CERNEX	CBL06185030 / Power Amplifier	03/28/2018	Annual	28550
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/29/2018	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/27/2018	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1902-FC057-P
2	HCT-RF-1902-FC058-P
3	HCT-RF-1902-FC059-P