

FCC DTS REPORT

Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: February 28, 2019
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	Report No.: HCT-RF-1902-FC059-R1

FCC ID:	A3LSMM105M
APPLICANT:	SAMSUNG Electronics Co., Ltd.

Model:	SM-M105M/DS
Additional Model:	SM-M105Y/DS, SM-M105Y, SM-M105M
EUT Type:	Mobile Phone
Average Output Power:	802.11b : 18.80 dBm 802.11g : 16.88 dBm 802.11n(HT20) : 16.72 dBm
Frequency Range:	2412 MHz - 2472 MHz
Modulation type:	CCK/DSSS/OFDM
FCC Classification:	Digital Transmission System(DTS)
FCC Rule Part(s):	Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



Report prepared by : Jeong Ho Kim
Engineer of Telecommunication testing center



Approved by : Jong Seok Lee
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1902-FC059	February 26, 2019	- First Approval Report
HCT-RF-1902-FC059-R1	February 28, 2019	- Page.5 revised

Table of Contents

1. EUT DESCRIPTION	4
2. TEST METHODOLOGY	5
EUT CONFIGURATION	5
EUT EXERCISE	5
GENERAL TEST PROCEDURES	5
DESCRIPTION OF TEST MODES	5
3. INSTRUMENT CALIBRATION.....	6
4. FACILITIES AND ACCREDITATIONS	6
FACILITIES	6
EQUIPMENT	6
5. ANTENNA REQUIREMENTS	6
6. MEASUREMENT UNCERTAINTY	7
7. DESCRIPTION OF TESTS	8
8. SUMMARY TEST OF RESULTS	22
9. TEST RESULT	23
9.1 DUTY CYCLE.....	23
9.2 6dB BANDWIDTH.....	24
9.3 OUTPUT POWER	27
9.4 POWER SPECTRAL DENSITY	33
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	36
9.6 RADIATED SPURIOUS EMISSIONS	51
9.7 RADIATED RESTRICTED BAND EDGES	62
9.8 POWERLINE CONDUCTED EMISSIONS	68
10. LIST OF TEST EQUIPMENT	72
11. ANNEX A_ TEST SETUP PHOTO	74

1. EUT DESCRIPTION

Model	SM-M105M/DS
EUT Type	Mobile Phone
Power Supply	DC 3.85 V
Battery Information	Model: EB-BA750ABUN Type: Li-ion Battery
Travel Adapter Information	Model: ETA0U83JWS Manufacture: DONGYANG E&P
Frequency Range	2412 MHz - 2472 MHz
Max. RF Output Power	<p><u>Peak Power(For information only)</u> 802.11b : 24.83 dBm 802.11g : 24.97 dBm 802.11n(HT20) : 24.75 dBm</p> <p><u>Average Power</u> 802.11b : 18.80 dBm 802.11g : 16.88 dBm 802.11n(HT20) : 16.72 dBm</p>
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n
Number of Channels	13 Channels
Antenna	BT/WLAN antenna
Antenna Specification	Type : LDS Antenna Peak Gain : -0.51 dBi
Date(s) of Tests	January 31, 2019 ~ February 14, 2019

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05 dated August 24, 2018 entitled "guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in ANSI C63.10 clause 6.6.5 (Version: 2013)

Conducted Antenna Terminal

See Section from 8.3.(KDB 558074 v05)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

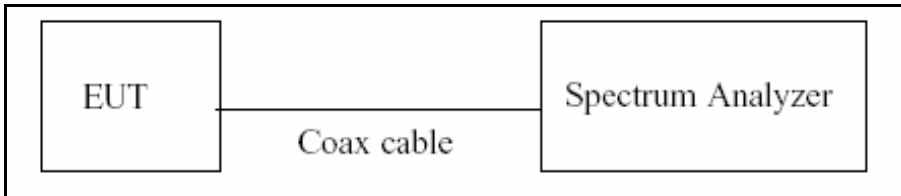

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration

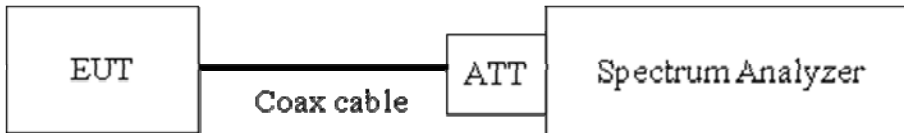

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05, Procedure 11.8.2 in ANSI 63.10-2013)


- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration

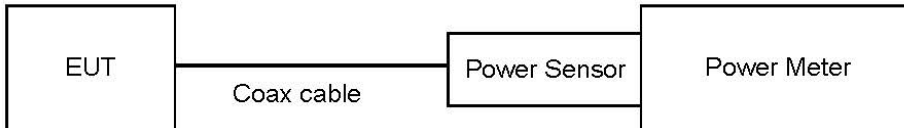

Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 8.3.1.3 in KDB 558074 v05, Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 8.3.2.3 in KDB 558074 v05, Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Total Power (Peak) = Reading Value + ATT loss + Cable loss
- Total Power (Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration

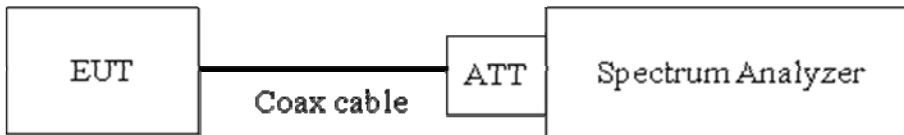

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure in KDB 558074 v05, Procedure 11.10.3 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Span = 1.5 times the DTS channel bandwidth.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power average(rms)
- 7) Ensure that the number of measurement points $\geq 2 \times \text{Span}/RBW$
- 8) Trace Mode = Average mode (a minimum of 100 traces.)
- 9) Allow trace to fully stabilize.
- 10) Measure the duty cycle(D) and Add Duty cycle factor[$10 \log(1/D)$, D=duty cycle], to the measured Avrage PSD result
- 11) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density(Avg) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration

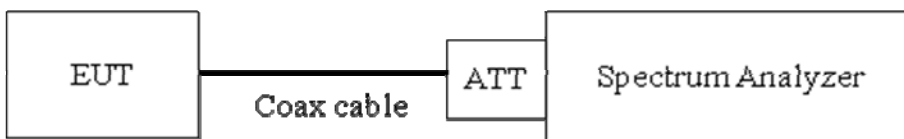

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	21.30
100	20.83
200	20.19
300	20.13
400	20.23
500	20.25
600	20.32
700	20.35
800	20.35
900	20.34
1000	20.39
2000	20.64
2400*	20.67
2500*	20.70
3000	20.71
4000	20.89
5000	21.07
6000	21.06
7000	21.35
8000	21.32
9000	21.48
10000	21.56
11000	21.56
12000	21.68
13000	21.83
14000	21.90
15000	21.98
16000	22.04
17000	22.02
18000	22.08
19000	22.07
20000	22.14
21000	22.17
22000	22.31
23000	22.60
24000	22.34
25000	22.53
26000	22.02

Note : 1. '*' is fundamental frequency range.
 2. Factor = Attenuator loss(20dB) + Cable loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

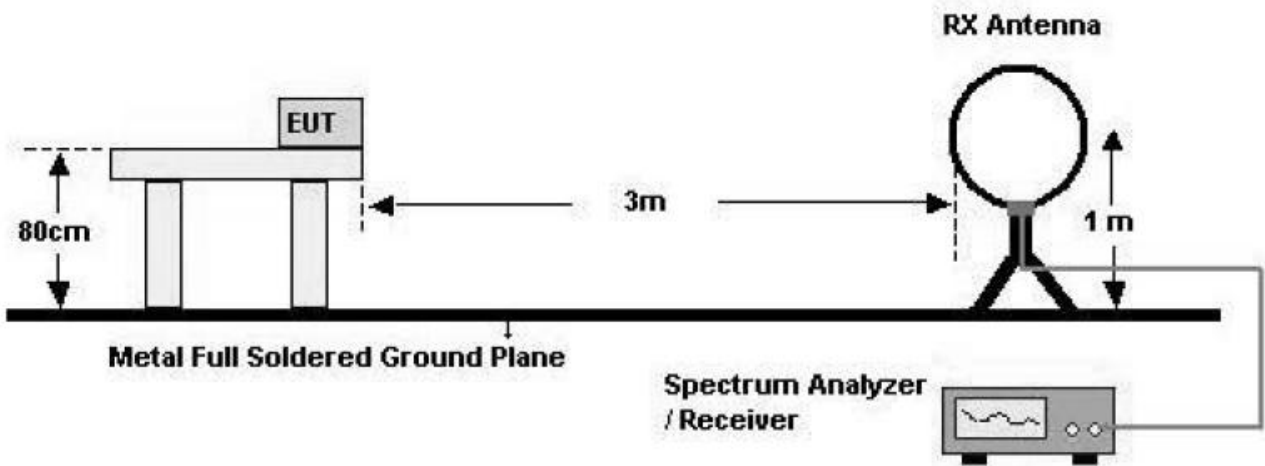

30 MHz - 1 GHz

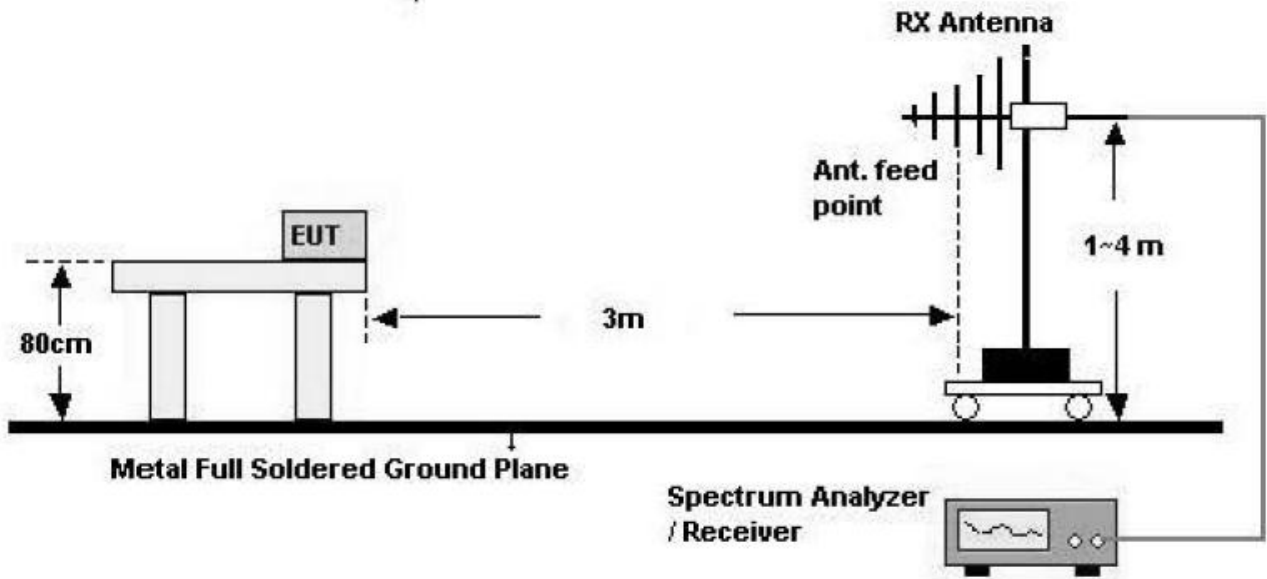

Above 1 GHz

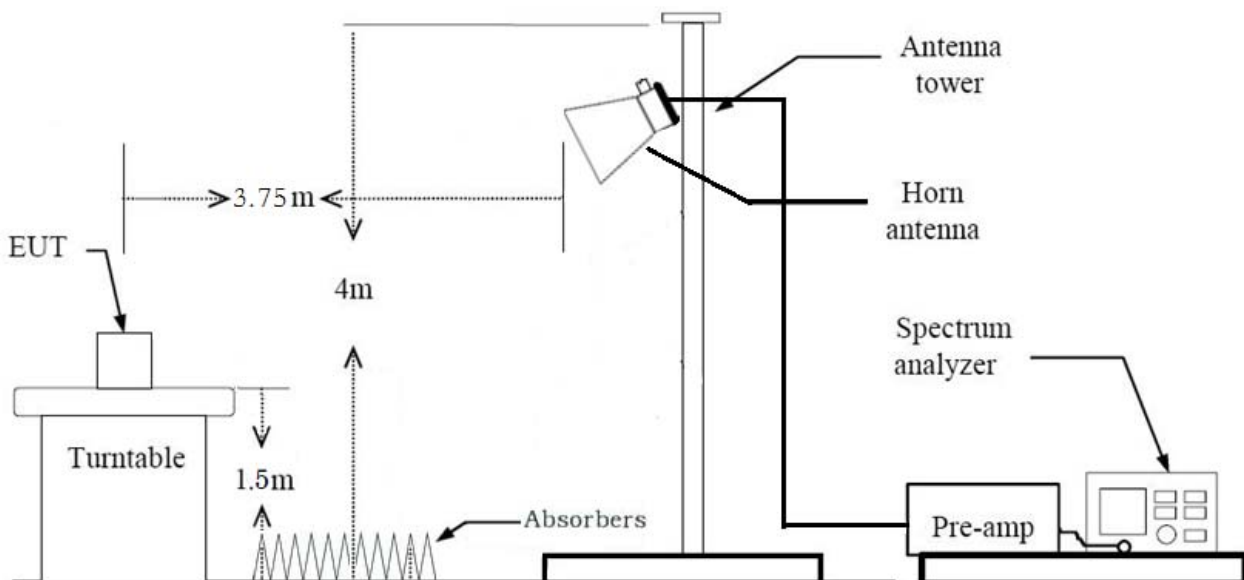

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \cdot$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. The test results for below 30 MHz is correlated to an open site.
The result on Open field site is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW $\geq 3 \cdot$ RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz

*In general, (1) is used mainly
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - (2) Measurement Type(Average): Duty cycle \geq 98%
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - (3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3*RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit

in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle \geq 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz

- VBW \geq 3*RBW

(2) Measurement Type(Average): Duty cycle \geq 98%,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz

- Detector = RMS

- Averaging type = power (i.e., RMS)

- RBW = 1 MHz

- VBW \geq 3*RBW

- Sweep time = auto.

- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz

- Detector = RMS

- Averaging type = power (i.e., RMS)

- RBW = 1 MHz

- VBW \geq 3*RBW

- Sweep time = auto.

- Trace mode = average (at least 100 traces).

- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle \geq 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + external accessories(earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
3. Duty cycle factor applies only 802.11g/n(Duty cycle < 98%).
4. All datarate of operation were investigated and the worst case datarate results are reported
 - 802.11b : 1Mbps
 - 802.11g : 6Mbps
 - 802.11n : MCS0

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone+Earphone+Travel Adapter, Stand alone+Travel Adapter
 - Worstcase : Stand alone+Travel Adapter

Conducted test

- All datarate of operation were investigated and the worst case datarate results are reported
- 802.11b : 5.5Mbps
 - 802.11g : 9Mbps
 - 802.11n : MCS4

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		N/A
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

9. TEST RESULT

9.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.607	8.718	0.987	0.056
	2	4.307	4.407	0.977	0.099
	5.5	1.631	1.728	0.944	0.249
	11	0.868	0.964	0.900	0.456
802.11g	6	1.430	1.531	0.934	0.296
	9	0.960	1.062	0.904	0.437
	12	0.725	0.825	0.879	0.561
	18	0.494	0.593	0.833	0.793
	24	0.373	0.474	0.787	1.042
	36	0.258	0.357	0.723	1.406
	48	0.199	0.298	0.667	1.757
	54	0.182	0.281	0.648	1.886
802.11n (HT20)	6.5 (MCS0)	1.338	1.439	0.930	0.317
	13 (MCS1)	0.690	0.790	0.874	0.586
	19.5 (MCS2)	0.474	0.573	0.828	0.822
	26 (MCS3)	0.365	0.465	0.785	1.049
	39 (MCS4)	0.258	0.357	0.722	1.415
	52 (MCS5)	0.202	0.301	0.671	1.732
	58.5 (MCS6)	0.186	0.285	0.653	1.853
	65 (MCS7)	0.170	0.269	0.631	1.998

9.2 6dB BANDWIDTH


802.11b Mode		6dB Bandwidth [MHz]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.			
2412	1	9.03	13.987	0.5
2437	6	9.07	14.129	0.5
2462	11	8.62	14.029	0.5
2467	12	8.10	13.965	0.5
2472	13	9.05	14.134	0.5

802.11g Mode		6dB Bandwidth [MHz]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.			
2412	1	15.38	16.373	0.5
2437	6	15.15	16.311	0.5
2462	11	15.52	16.385	0.5
2467	12	15.11	16.282	0.5
2472	13	15.11	16.332	0.5


802.11n Mode		6dB Bandwidth [MHz]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.			
2412	1	15.18	17.562	0.5
2437	6	15.16	17.472	0.5
2462	11	15.18	17.570	0.5
2467	12	15.16	17.426	0.5
2472	13	15.17	17.500	0.5

■ Test Plots


6dB Bandwidth plot (802.11b-CH 12)

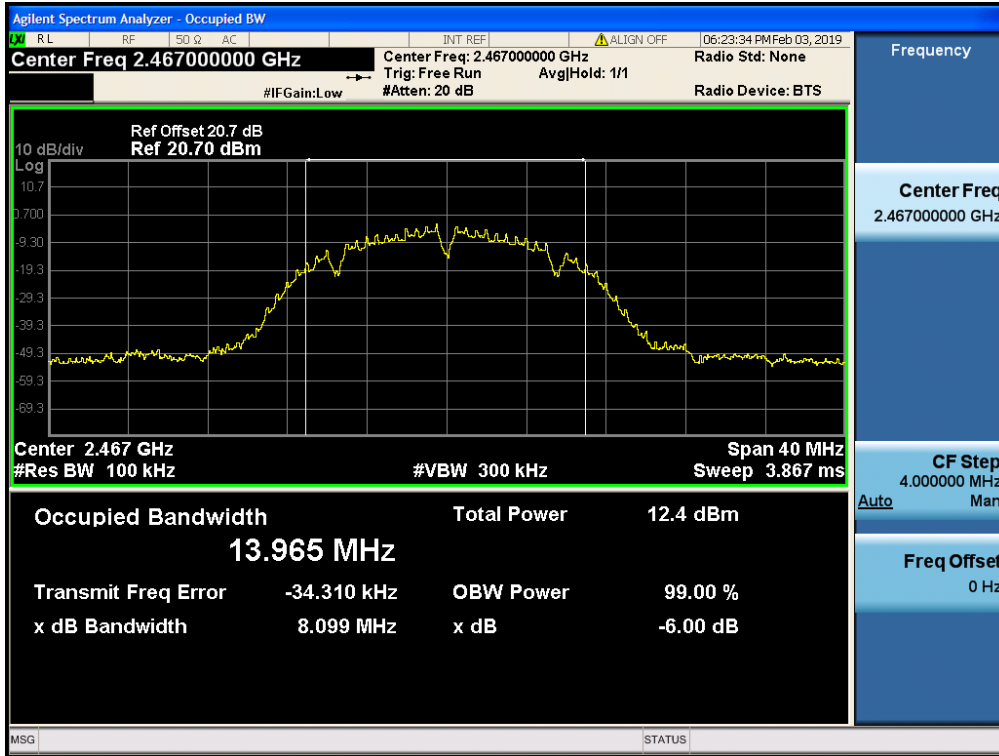

6dB Bandwidth plot (802.11g-CH 12)

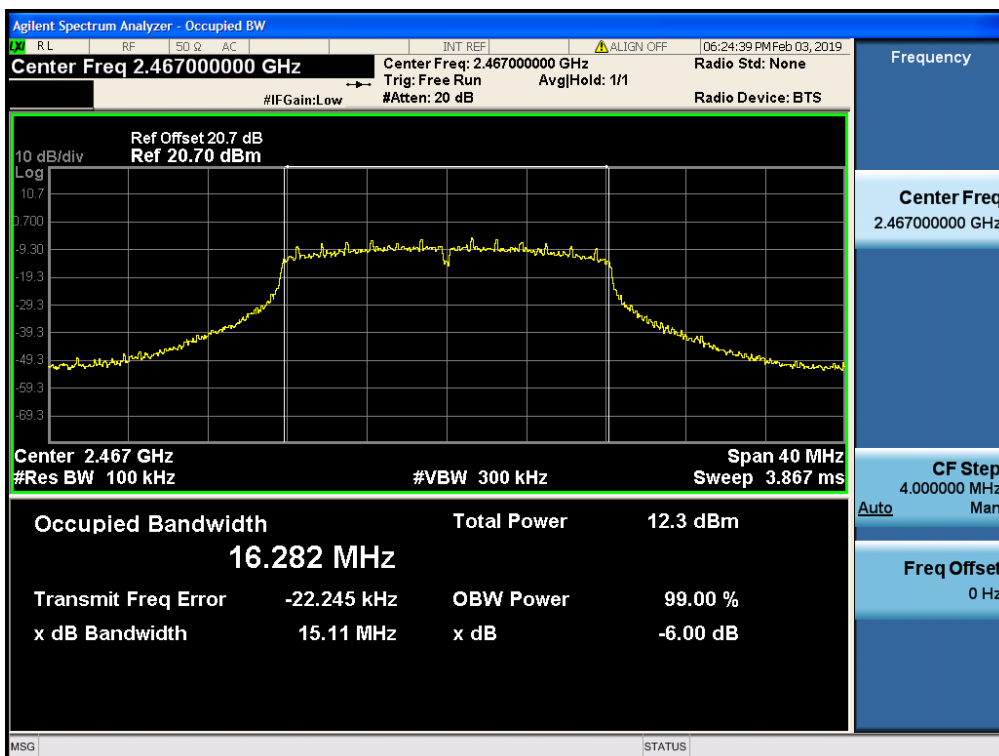

6dB Bandwidth plot (802.11n_HT20-CH 12)

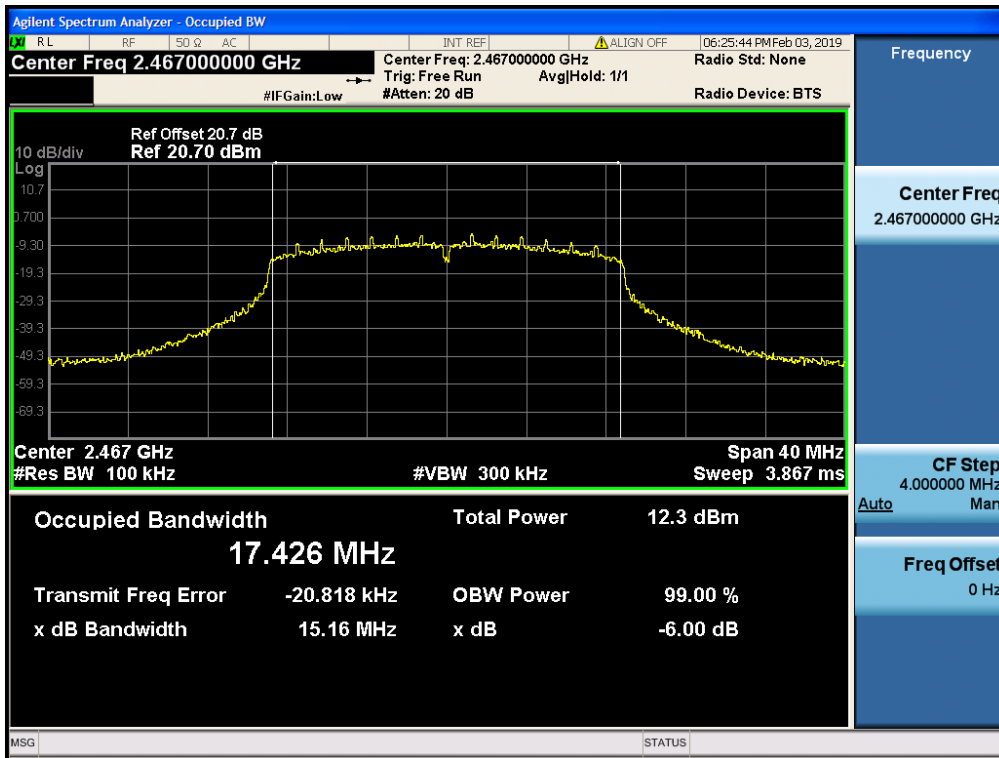

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.70 dB is offset for 2.4 GHz Band.

802.11b Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Limit [dBm]
Frequency [MHz]	Channel No.				
2412	1	18	1	21.15	30
			2	21.64	30
			5.5	22.96	30
			11	24.83	30
2437	6		1	20.69	30
			2	20.98	30
			5.5	22.63	30
			11	24.13	30
2462	11		1	20.80	30
			2	21.40	30
			5.5	22.85	30
			11	24.34	30
2467	12	1	7.43	30	
		2	7.98	30	
		5.5	9.44	30	
		11	11.05	30	
2472	13	1	-3.61	30	
		2	-4.53	30	
		5.5	-2.01	30	
		11	-0.27	30	

802.11g Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Limit [dBm]
Frequency[M Hz]	Channel No.				
2412	1	15	6	23.14	30
			9	23.15	30
			12	23.13	30
			18	22.94	30
			24	23.40	30
			36	23.50	30
			48	23.40	30
			54	23.60	30
2437	6	17	6	24.60	30
			9	24.58	30
			12	24.66	30
			18	24.45	30
			24	24.85	30
			36	24.88	30
			48	24.88	30
			54	24.97	30
2462	11	14	6	22.29	30
			9	22.27	30
			12	22.21	30
			18	22.17	30
			24	22.47	30
			36	22.60	30
			48	22.67	30
			54	22.66	30
2467	12	10	6	12.96	30
			9	12.96	30
			12	12.98	30
			18	12.70	30
			24	13.19	30
			36	13.28	30
			48	13.40	30
			54	13.33	30
2472	13	1	6	2.72	30
			9	2.67	30
			12	2.56	30
			18	2.54	30
			24	3.03	30
			36	3.18	30
			48	3.08	30
			54	3.21	30

802.11n Mode		Power Level Setting	MCS Index	Measured Power[dBm]	Limit [dBm]
Frequency[M Hz]	Channel No.				
2412	1	15	0	22.70	30
			1	22.71	30
			2	22.52	30
			3	23.31	30
			4	23.12	30
			5	23.17	30
			6	23.14	30
			7	23.03	30
2437	6	17	0	24.34	30
			1	24.27	30
			2	24.25	30
			3	24.75	30
			4	24.70	30
			5	24.50	30
			6	24.60	30
			7	24.55	30
2462	11	14	0	21.93	30
			1	21.86	30
			2	21.85	30
			3	22.45	30
			4	22.28	30
			5	22.23	30
			6	22.31	30
			7	22.18	30
2467	12	10	0	12.46	30
			1	12.42	30
			2	12.34	30
			3	12.91	30
			4	12.88	30
			5	13.18	30
			6	13.08	30
			7	12.88	30
2472	13	1	0	2.92	30
			1	2.34	30
			2	3.04	30
			3	3.48	30
			4	2.83	30
			5	2.86	30
			6	2.88	30
			7	2.81	30

Average Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.7 dB is offset for 2.4 GHz Band.

802.11b Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	18	1	18.64	0.056	18.70	30
			2	18.64	0.099	18.74	30
			5.5	18.55	0.249	18.80	30
			11	18.31	0.456	18.77	30
2437	6		1	17.97	0.056	18.02	30
			2	18.08	0.099	18.18	30
			5.5	18.10	0.249	18.35	30
			11	17.77	0.456	18.23	30
2462	11		1	18.41	0.056	18.46	30
			2	18.46	0.099	18.56	30
			5.5	18.42	0.249	18.67	30
			11	18.13	0.456	18.59	30
2467	12		1	4.90	0.056	4.95	30
			2	5.16	0.099	5.26	30
			5.5	5.07	0.249	5.32	30
			11	4.83	0.456	5.28	30
2472	13	1	-6.37	0.056	-6.32	30	
		2	-7.63	0.099	-7.53	30	
		5.5	-6.50	0.249	-6.25	30	
		11	-6.72	0.456	-6.27	30	

802.11g Mode		Power Level Setting	Data Rate [Mbps]	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	15	6	15.10	0.296	15.39	30
			9	15.06	0.437	15.49	30
			12	14.84	0.561	15.40	30
			18	14.54	0.793	15.34	30
			24	14.35	1.042	15.39	30
			36	13.95	1.406	15.36	30
			48	13.49	1.757	15.25	30
			54	13.44	1.886	15.33	30
2437	6	17	6	16.58	0.296	16.87	30
			9	16.45	0.437	16.88	30
			12	16.31	0.561	16.87	30
			18	16.06	0.793	16.85	30
			24	15.84	1.042	16.88	30
			36	15.37	1.406	16.78	30
			48	15.03	1.757	16.79	30
			54	14.90	1.886	16.79	30
2462	11	14	6	14.22	0.296	14.51	30
			9	14.10	0.437	14.54	30
			12	13.94	0.561	14.50	30
			18	13.75	0.793	14.54	30
			24	13.47	1.042	14.52	30
			36	13.06	1.406	14.47	30
			48	12.67	1.757	14.43	30
			54	12.58	1.886	14.46	30
2467	12	10	6	4.93	0.296	5.22	30
			9	4.87	0.437	5.30	30
			12	4.74	0.561	5.30	30
			18	4.33	0.793	5.13	30
			24	4.14	1.042	5.18	30
			36	3.81	1.406	5.21	30
			48	3.40	1.757	5.15	30
			54	3.32	1.886	5.21	30
2472	13	1	6	-5.68	0.296	-5.38	30
			9	-5.69	0.437	-5.25	30
			12	-5.87	0.561	-5.31	30
			18	-6.16	0.793	-5.37	30
			24	-6.38	1.042	-5.34	30
			36	-6.71	1.406	-5.30	30
			48	-7.10	1.757	-5.35	30
			54	-7.21	1.886	-5.32	30

802.11n Mode		Power Level Setting	MCS Index	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.						
2412	1	15	0	14.93	0.317	15.25	30
			1	14.68	0.586	15.26	30
			2	14.44	0.822	15.26	30
			3	14.23	1.049	15.28	30
			4	13.94	1.415	15.35	30
			5	13.58	1.732	15.32	30
			6	13.44	1.853	15.29	30
			7	13.24	1.998	15.24	30
2437	6	17	0	16.40	0.317	16.72	30
			1	16.12	0.586	16.70	30
			2	15.84	0.822	16.67	30
			3	15.62	1.049	16.66	30
			4	15.31	1.415	16.72	30
			5	14.92	1.732	16.65	30
			6	14.85	1.853	16.70	30
			7	14.72	1.998	16.71	30
2462	11	14	0	14.12	0.317	14.43	30
			1	13.84	0.586	14.42	30
			2	13.64	0.822	14.47	30
			3	13.33	1.049	14.38	30
			4	13.07	1.415	14.48	30
			5	12.65	1.732	14.38	30
			6	12.57	1.853	14.43	30
			7	12.45	1.998	14.44	30
2467	12	10	0	4.56	0.317	4.88	30
			1	4.28	0.586	4.87	30
			2	4.06	0.822	4.88	30
			3	3.92	1.049	4.97	30
			4	3.61	1.415	5.03	30
			5	3.28	1.732	5.02	30
			6	3.15	1.853	5.00	30
			7	3.02	1.998	5.02	30
2472	13	1	0	-5.45	0.317	-5.13	30
			1	-5.97	0.586	-5.38	30
			2	-5.94	0.822	-5.11	30
			3	-6.24	1.049	-5.19	30
			4	-6.52	1.415	-5.10	30
			5	-6.93	1.732	-5.20	30
			6	-7.00	1.853	-5.15	30
			7	-7.17	1.998	-5.17	30

9.4 POWER SPECTRAL DENSITY


Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD (dBm)	Duty Cycle Factor (dB)	Measured PSD(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11b	2412	1	-4.011	0.249	-3.762	8.000
	2437	6	-4.366	0.249	-4.117	8.000
	2462	11	-4.020	0.249	-3.771	8.000
	2467	12	-17.503	0.249	-17.254	8.000
	2472	13	-28.666	0.249	-28.417	8.000
802.11g	2412	1	-9.191	0.437	-8.754	8.000
	2437	6	-6.913	0.437	-6.476	8.000
	2462	11	-9.580	0.437	-9.143	8.000
	2467	12	-18.850	0.437	-18.413	8.000
	2472	13	-28.937	0.437	-28.500	8.000
802.11n (HT20)	2412	1	-9.020	1.415	-7.605	8.000
	2437	6	-7.036	1.415	-5.621	8.000
	2462	11	-10.333	1.415	-8.918	8.000
	2467	12	-19.182	1.415	-17.767	8.000
	2472	13	-28.542	1.415	-27.127	8.000

Note :


1. Spectrum reading values are not plot data.
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.7 is offset for 2.4 GHz Band.

■ Test Plots


Power Spectral Density (802.11b-CH 1)

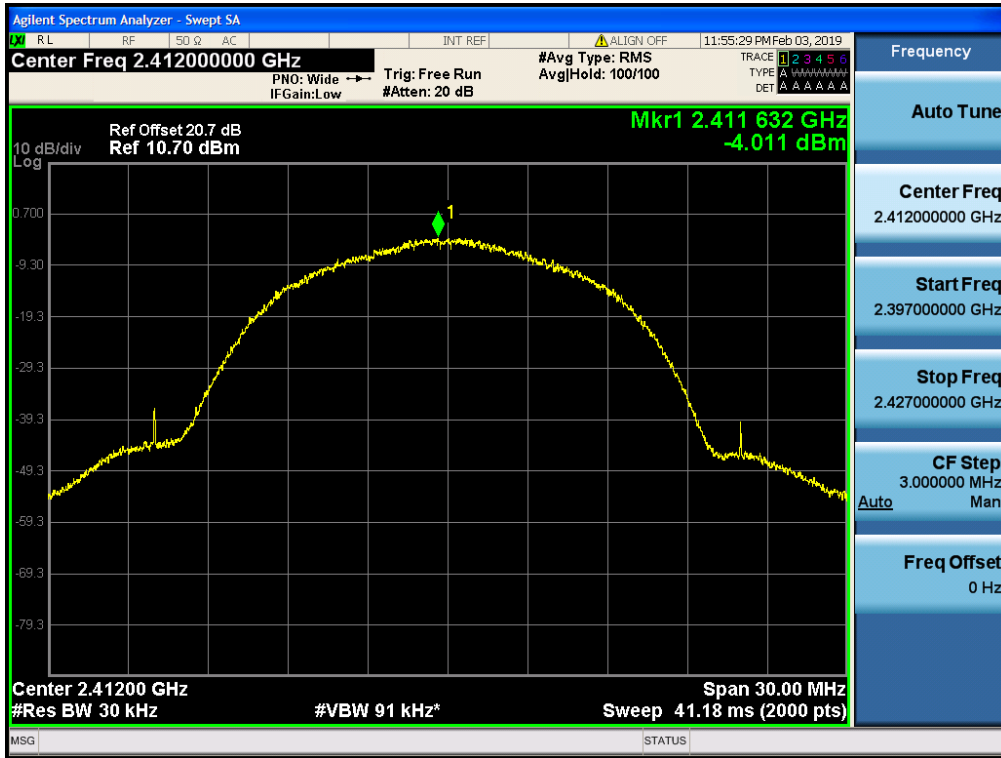

Power Spectral Density (802.11g-CH 6)

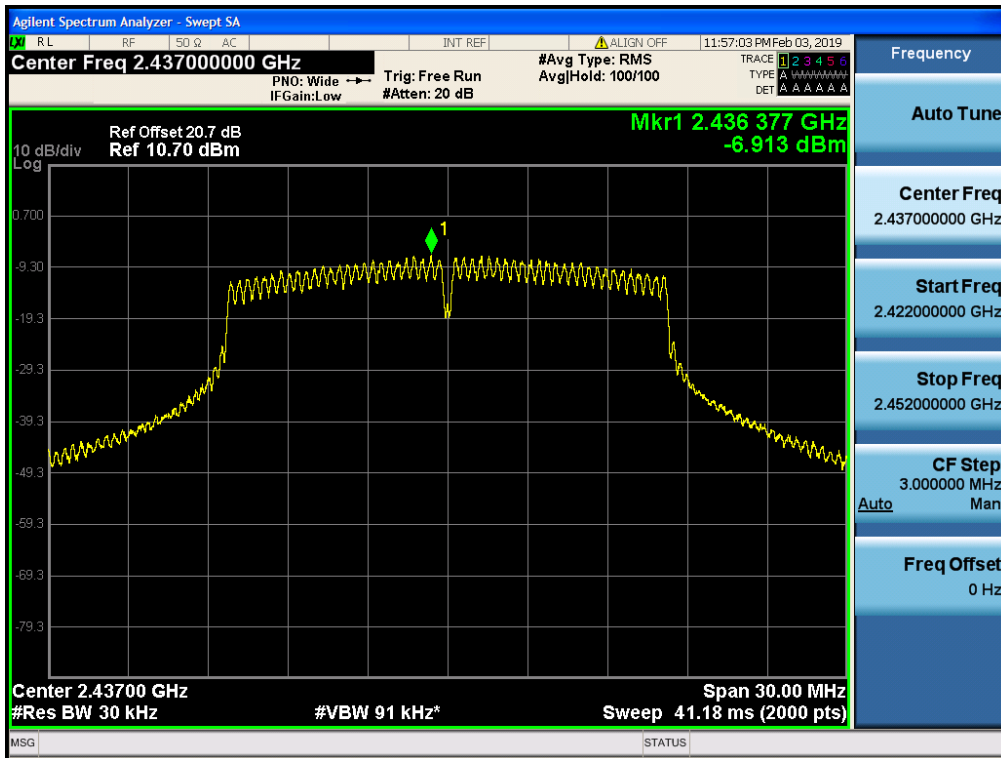

Power Spectral Density (802.11n_HT20 -CH 6)

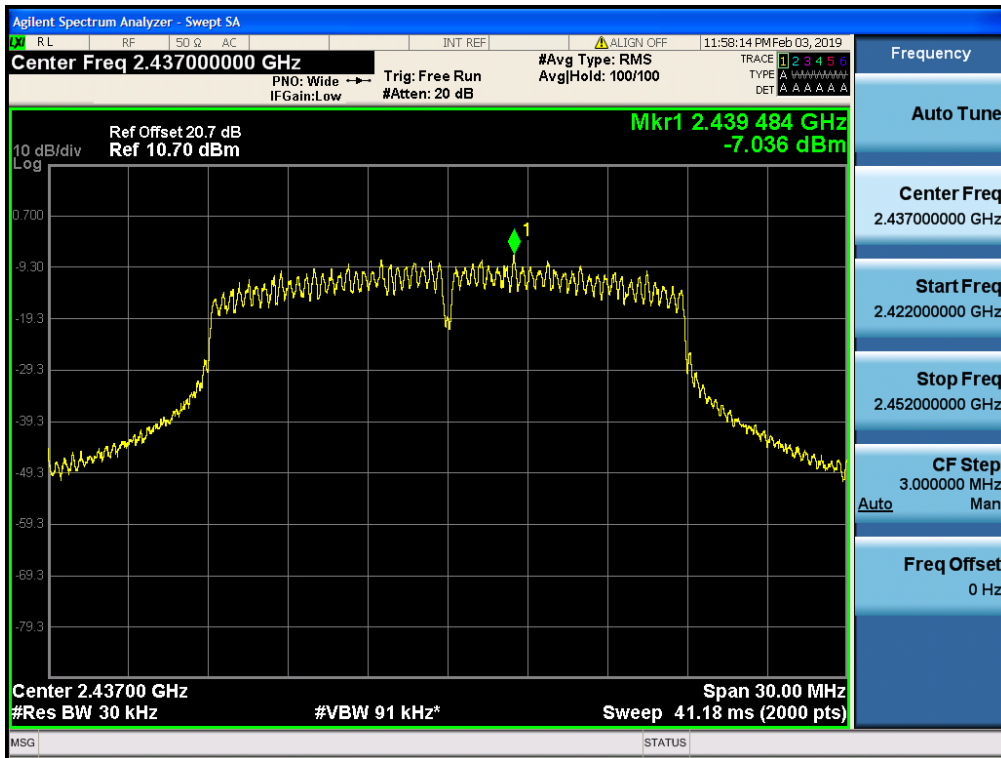

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS


Note:

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

■ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

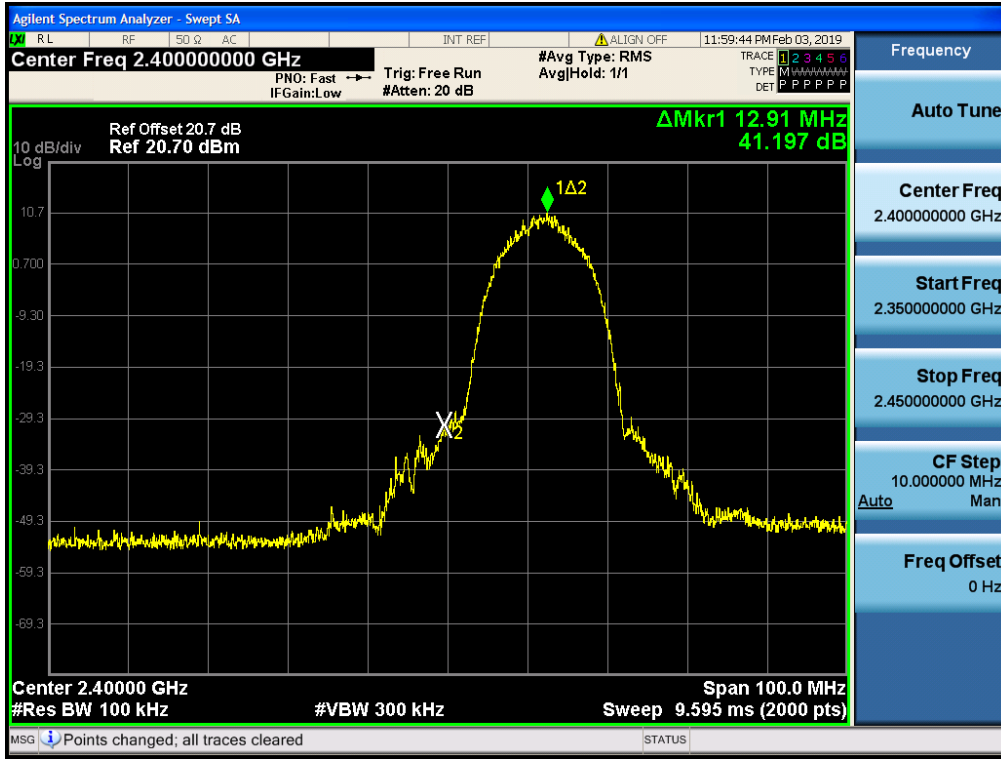


Band Edge (802.11b-CH11)

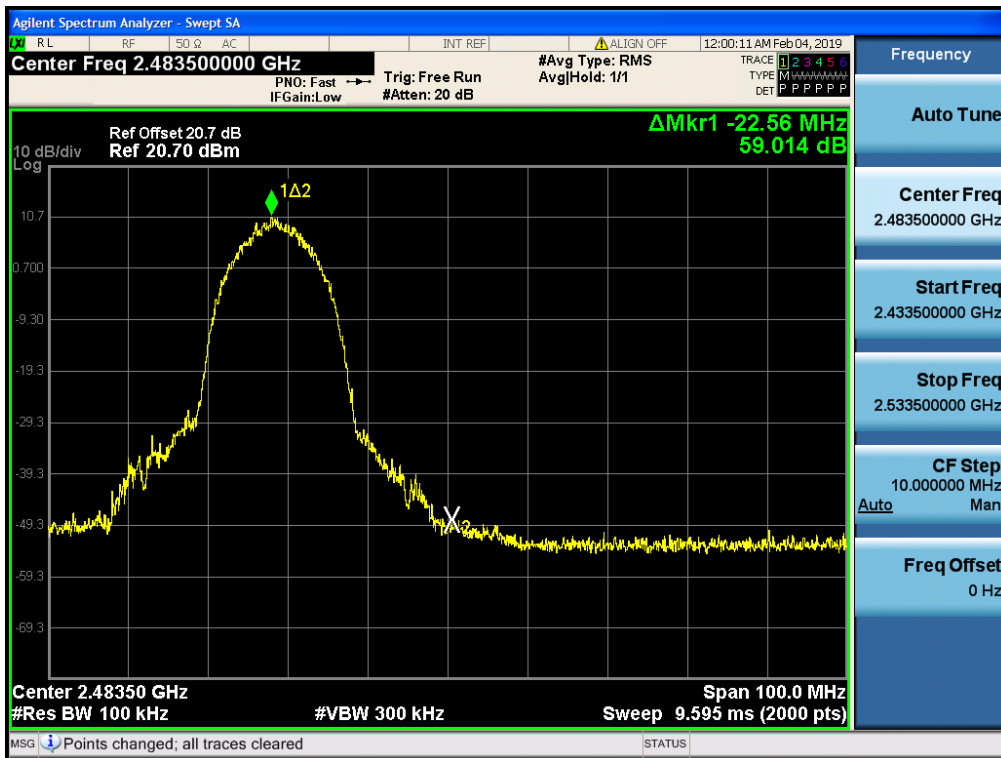


Band Edge (802.11b-CH12)

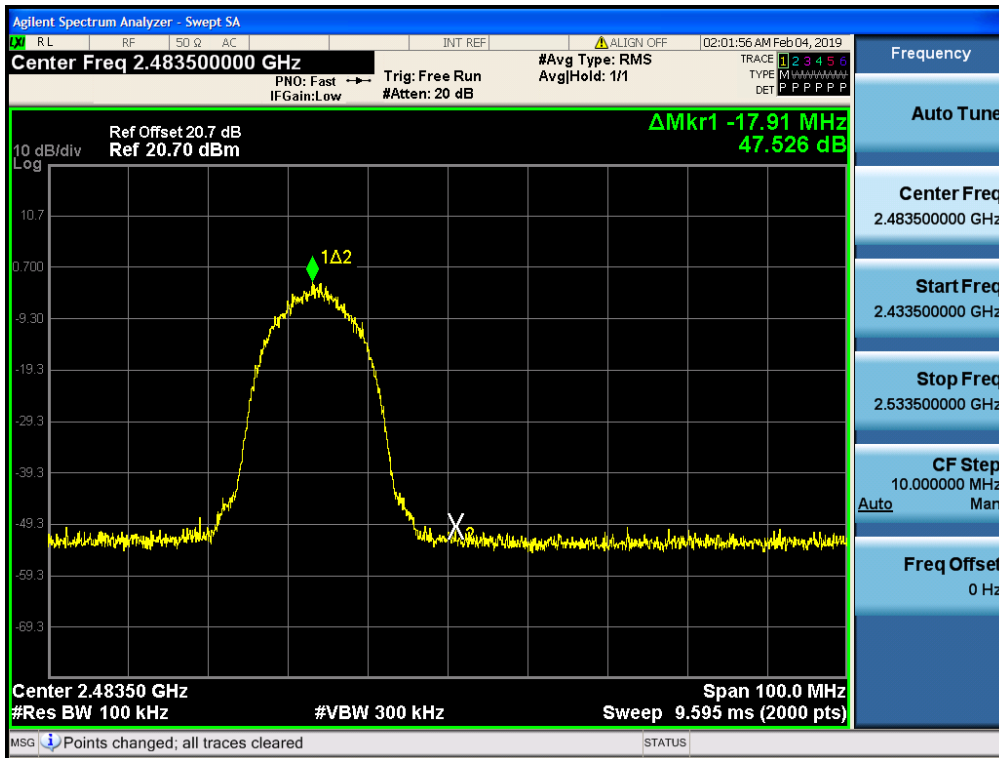


Band Edge (802.11b-CH13)

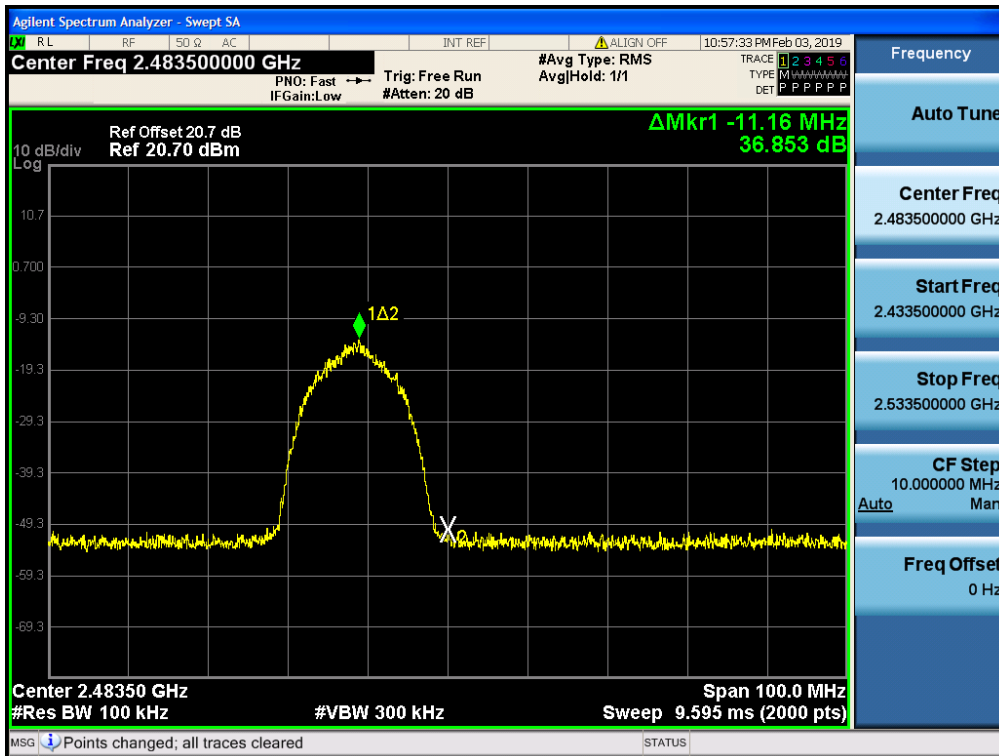


Band Edge (802.11g-CH1)

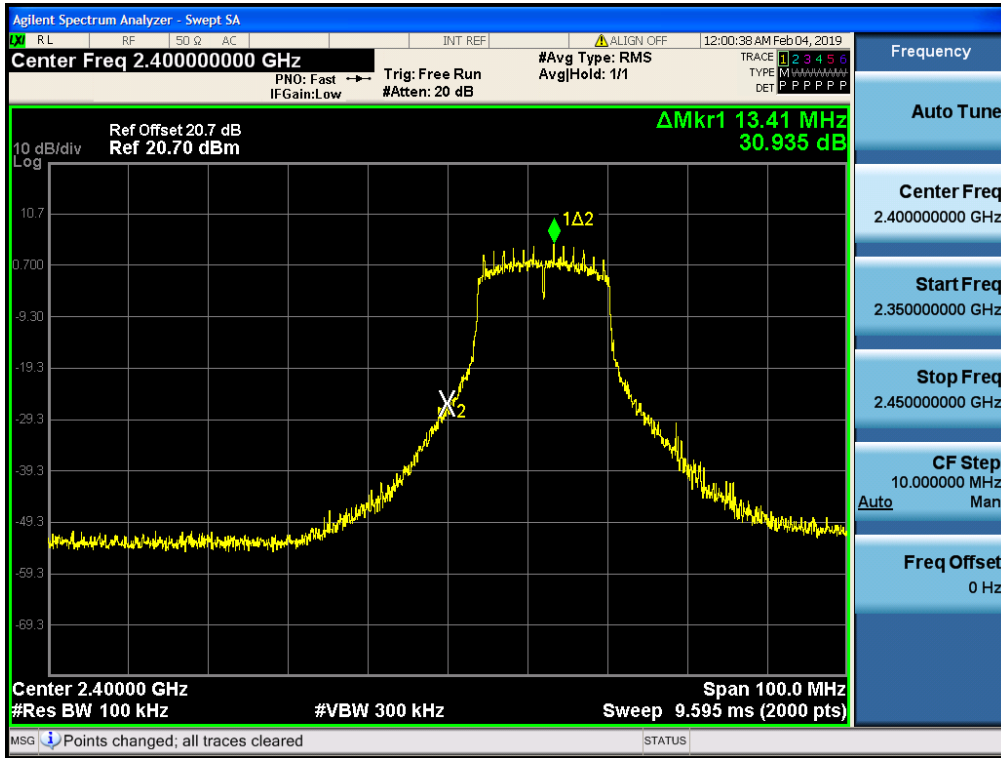


Band Edge (802.11g-CH2)

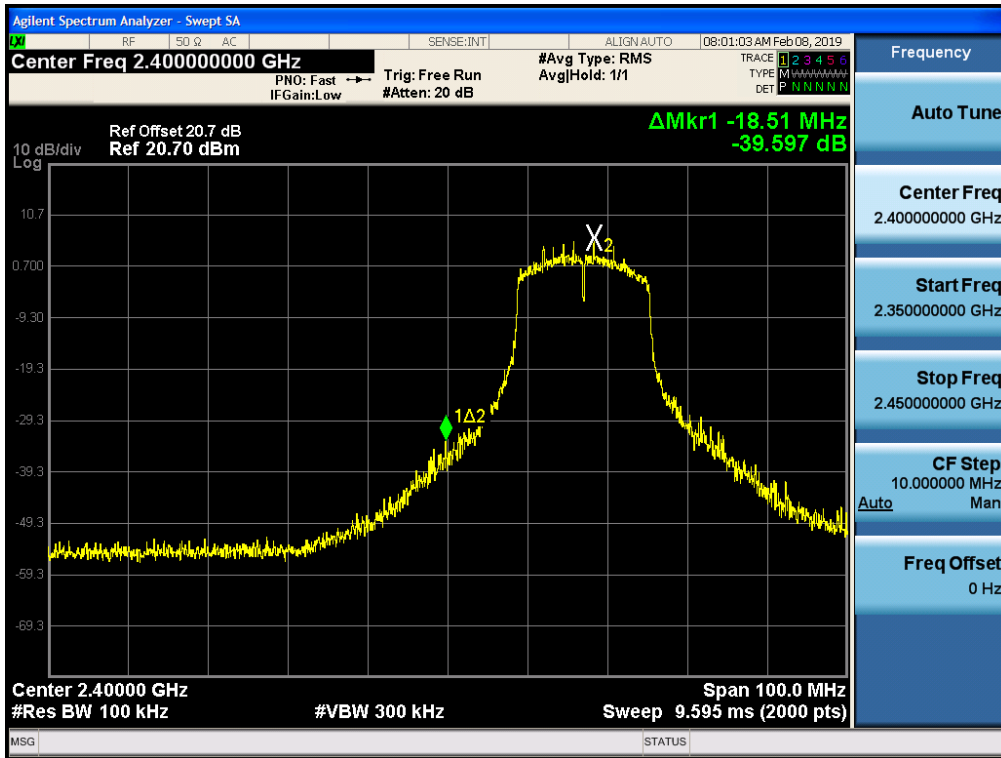


Band Edge (802.11g-CH11)

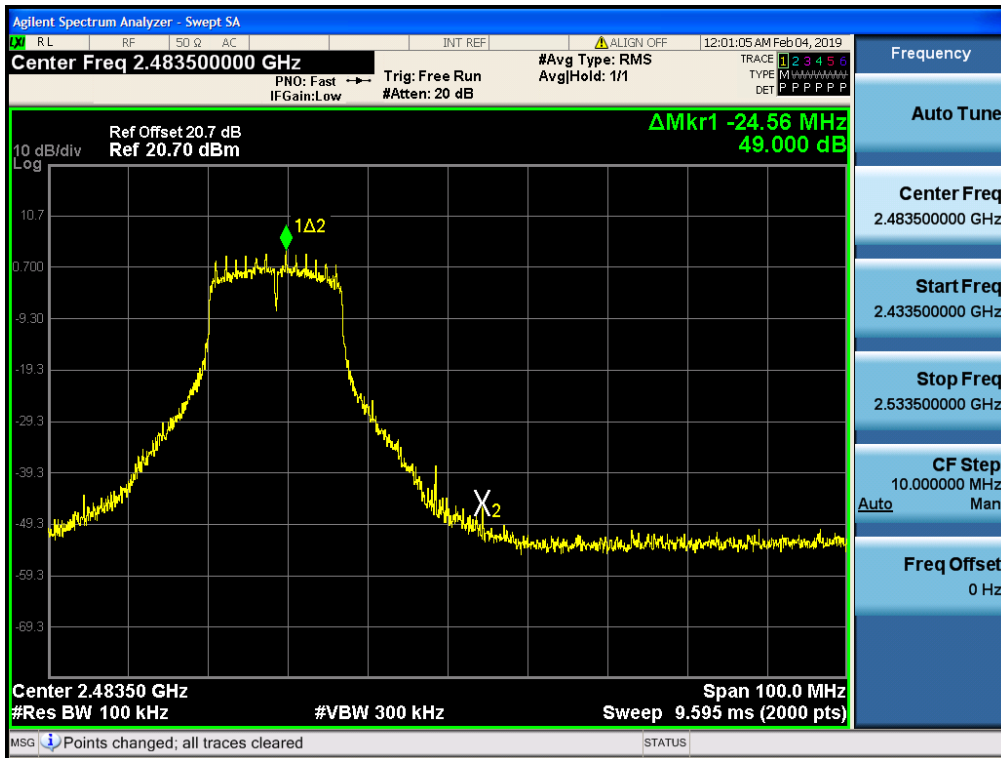


Band Edge (802.11g-CH12)

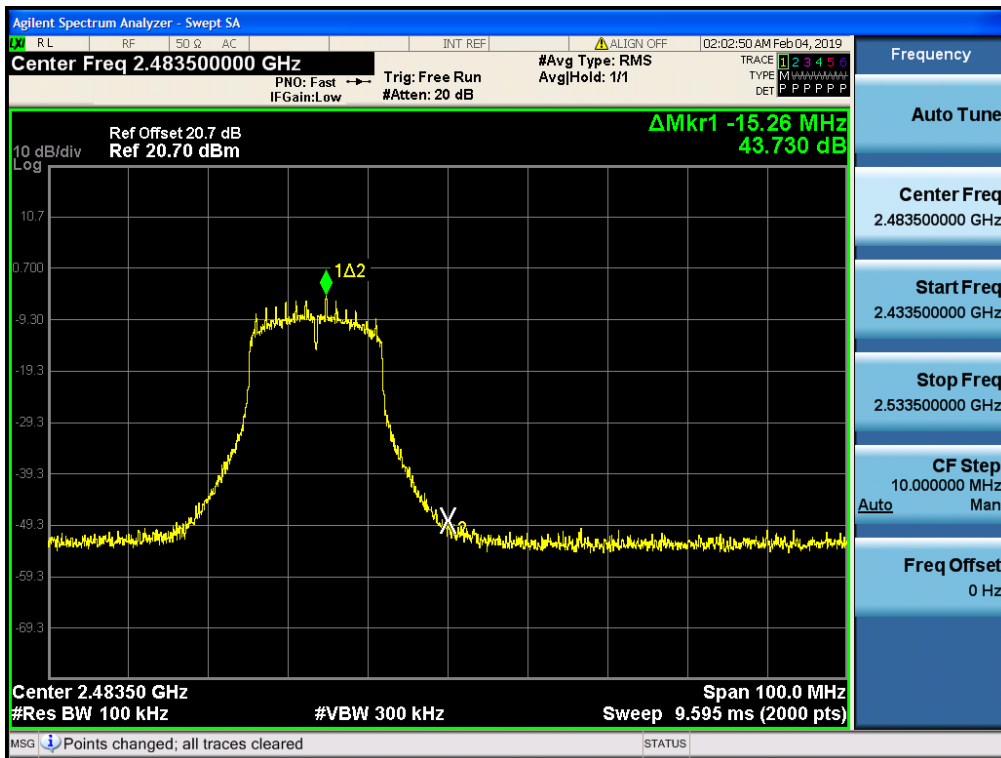


Band Edge (802.11g-CH13)

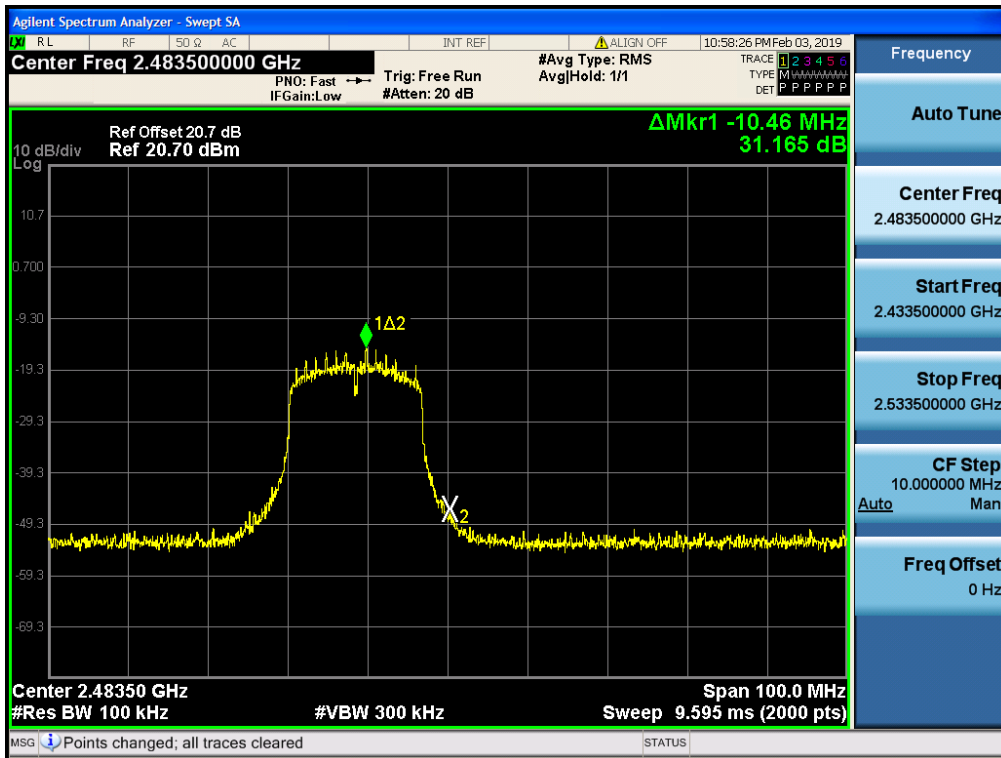


Band Edge (802.11n_HT20-CH1)

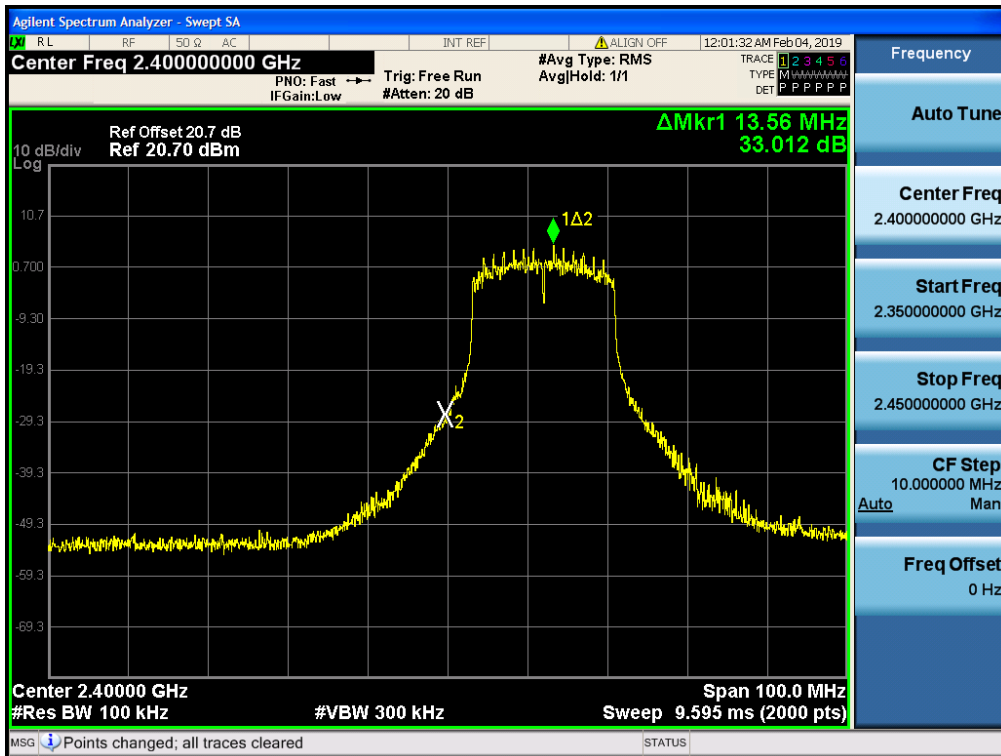


Band Edge (802.11n_HT20-CH2)

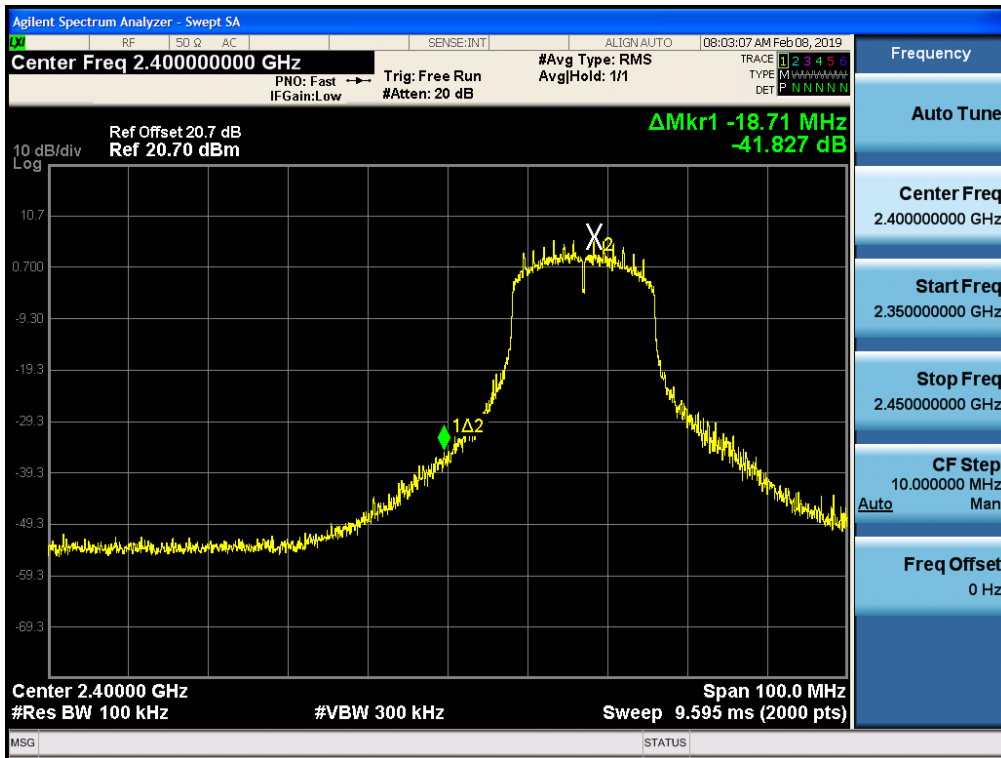


Band Edge (802.11n_HT20-CH11)

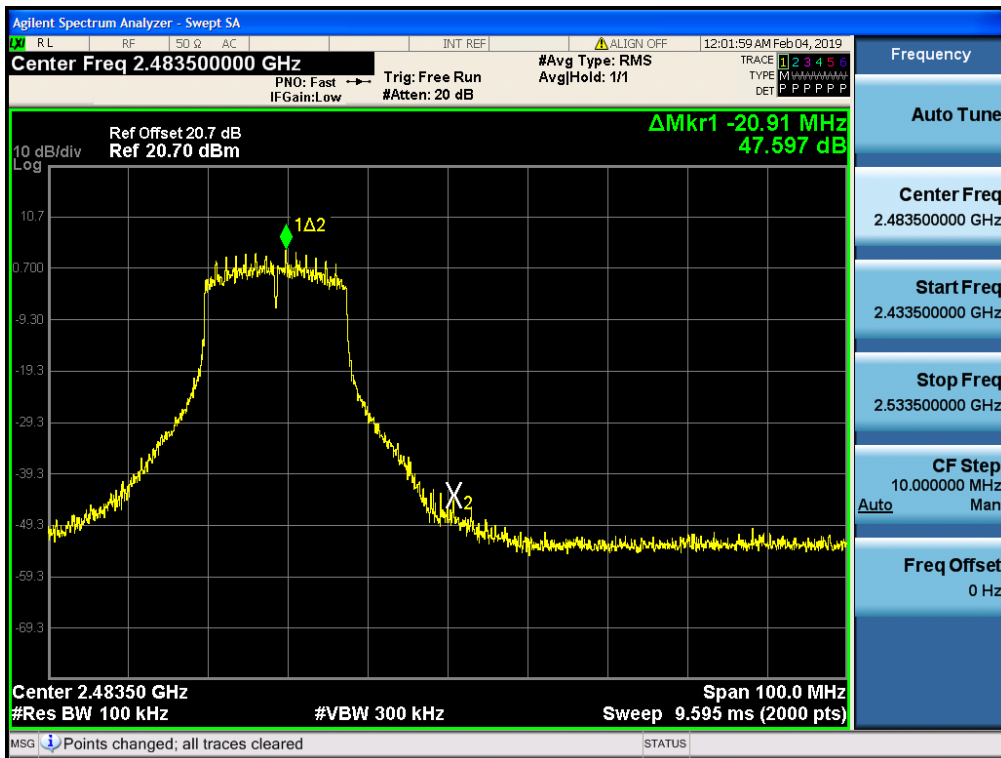

Band Edge (802.11n_HT20-CH12)

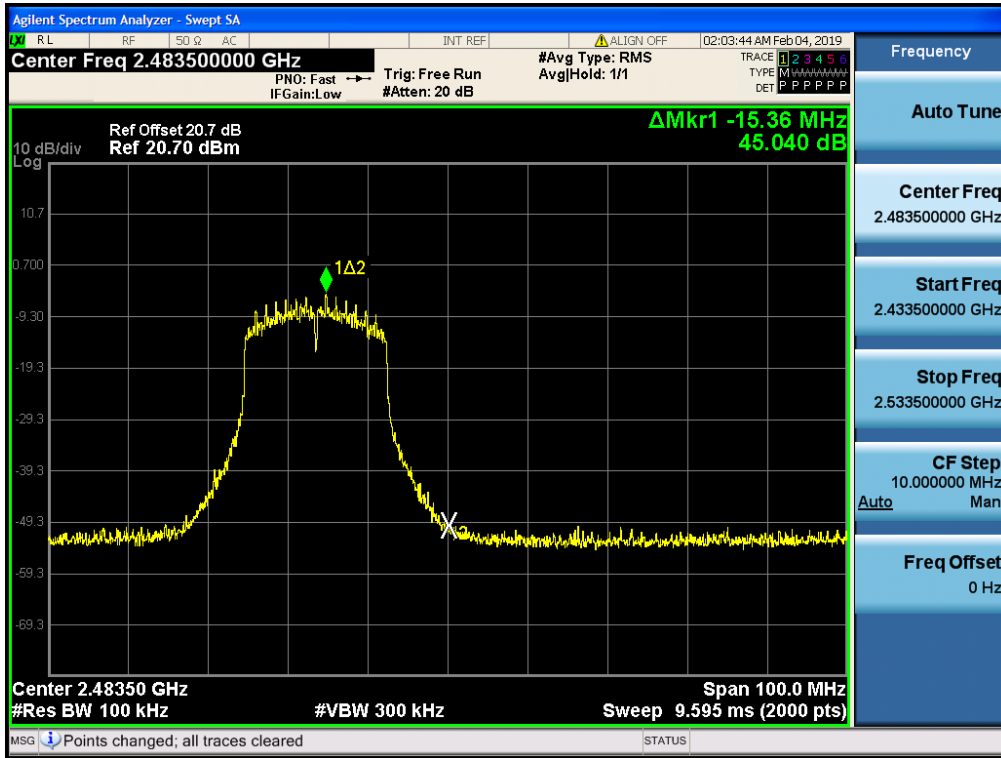


Band Edge (802.11n_HT20-CH13)

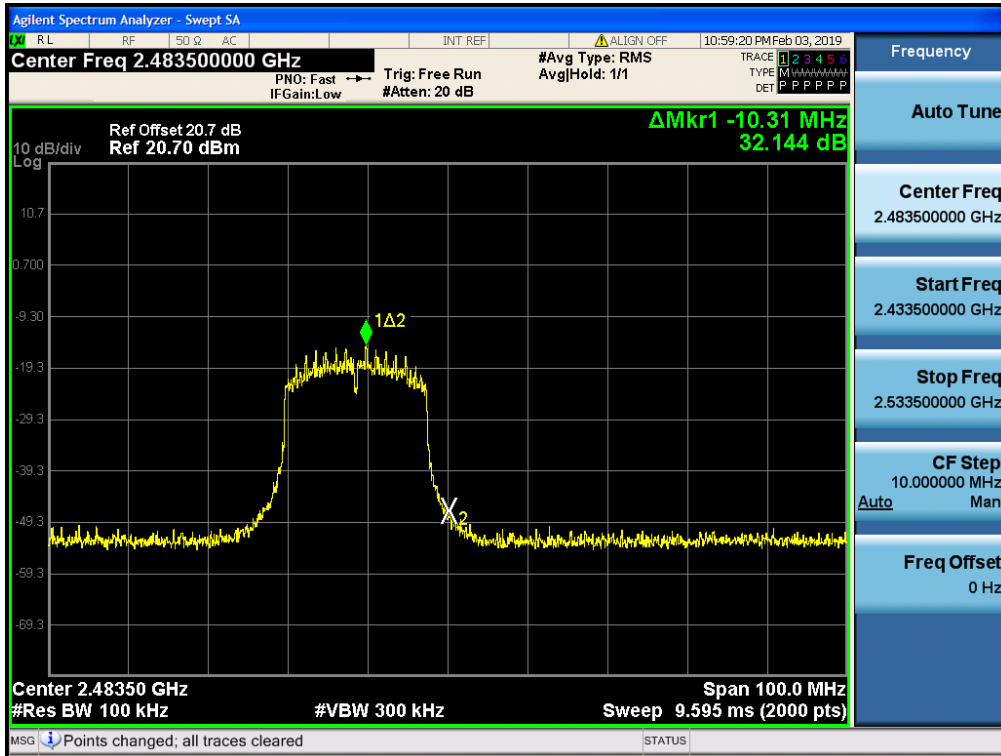

■ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.1_1Mbps)

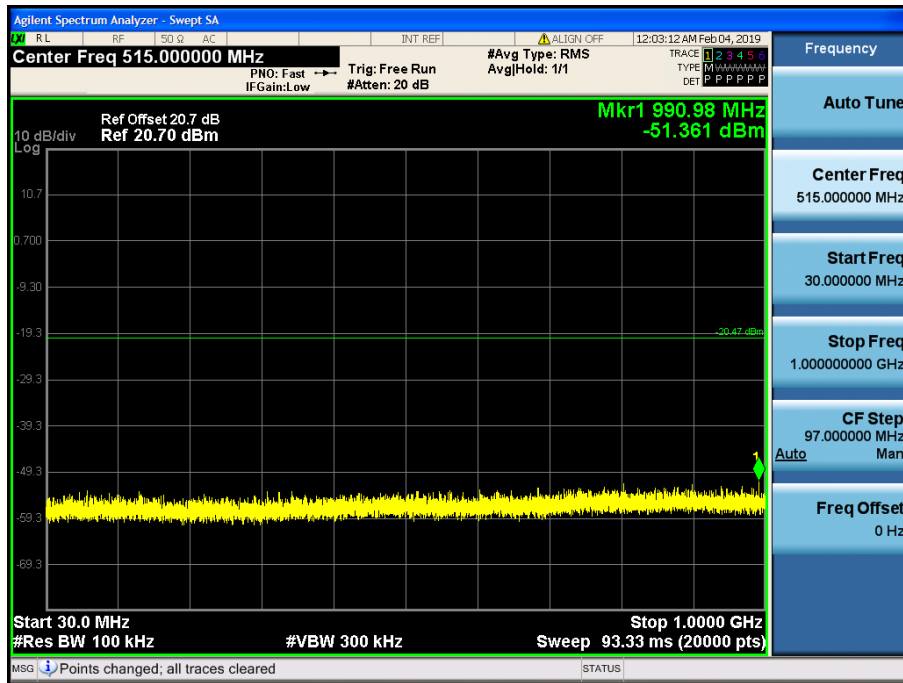


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.1_1Mbps)

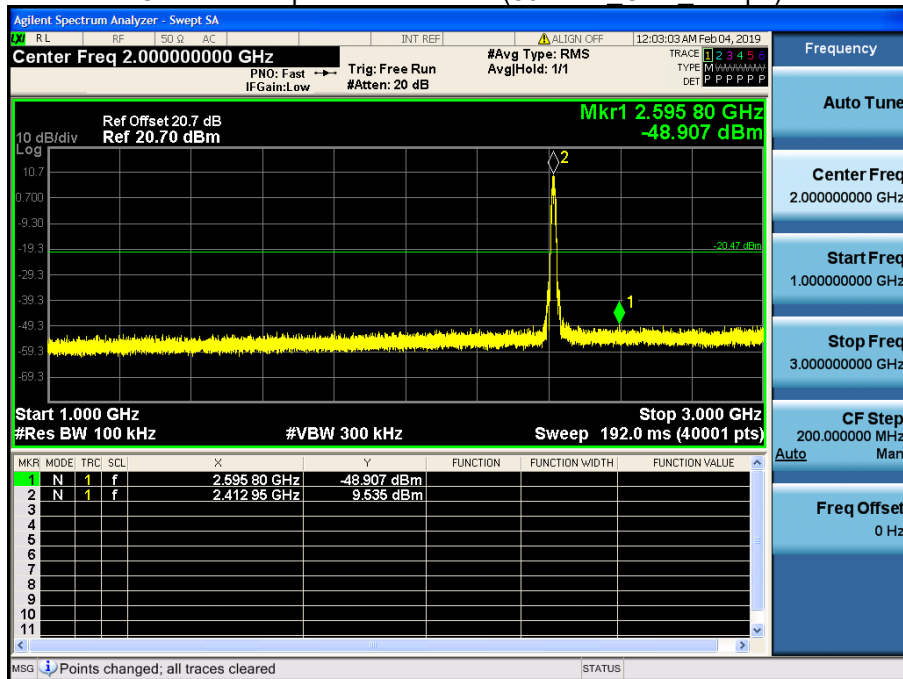


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b Ch.1 1Mbps)

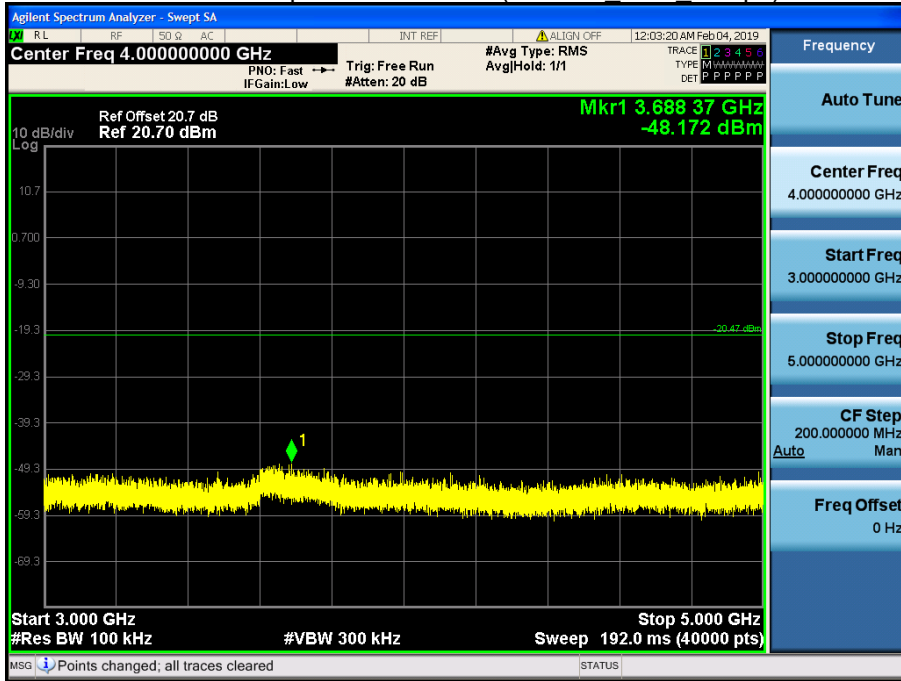


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b Ch.1 1Mbps)

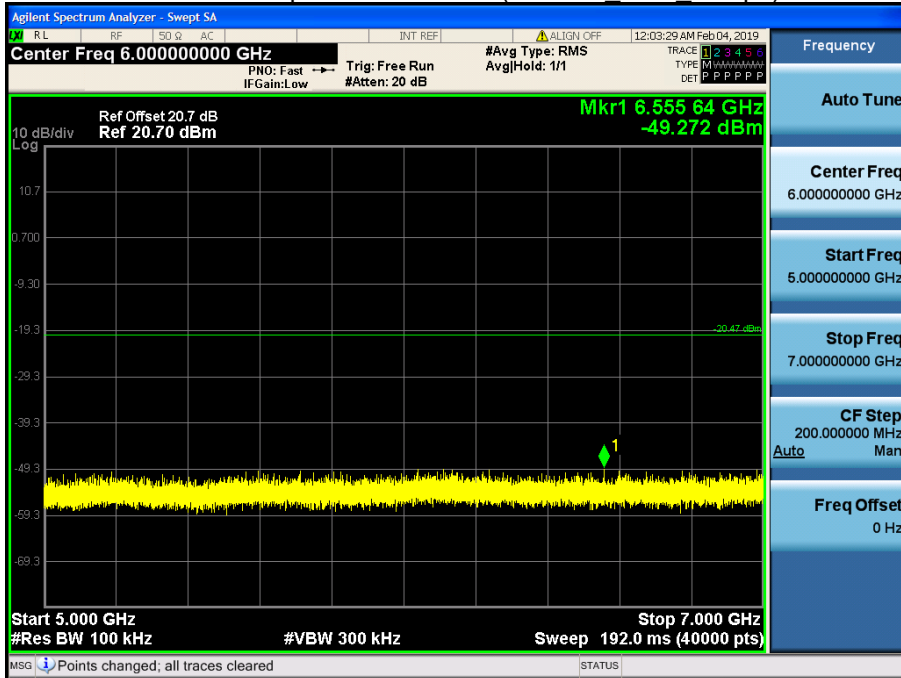


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.1_1Mbps)

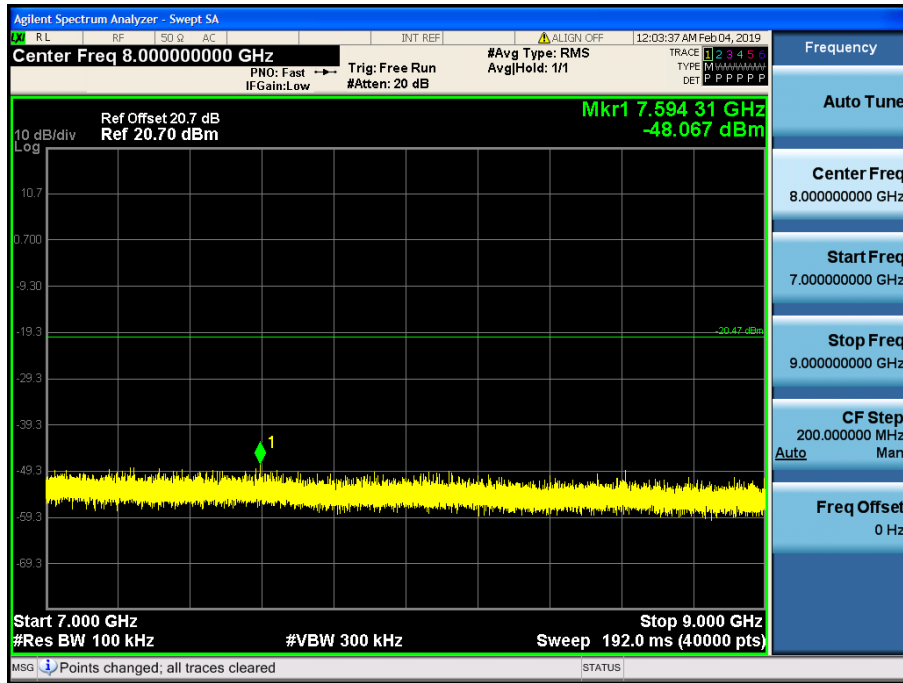


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.1_1Mbps)

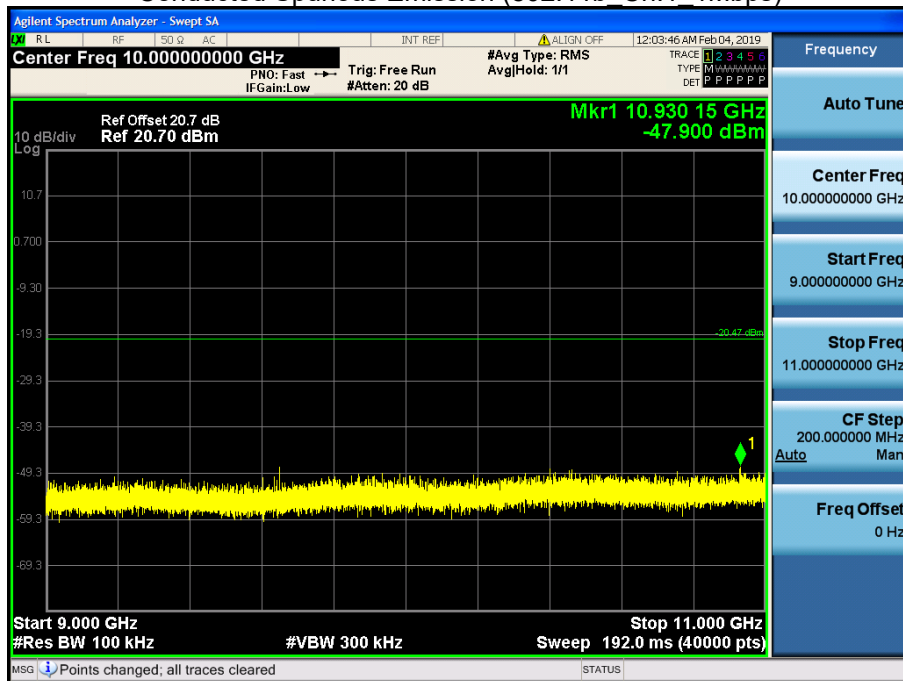


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.1_1Mbps)

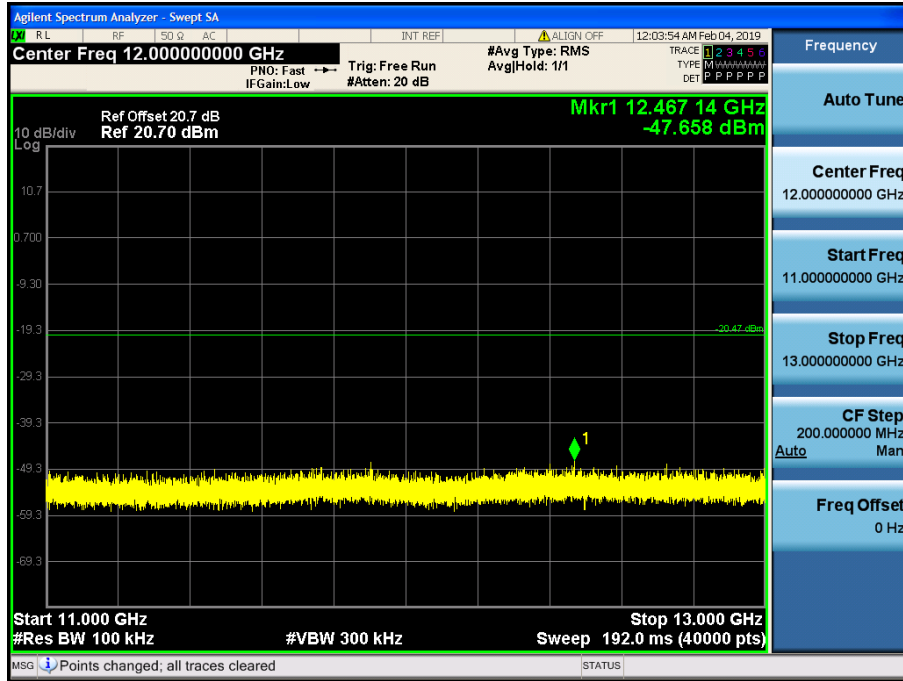


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.1_1Mbps)

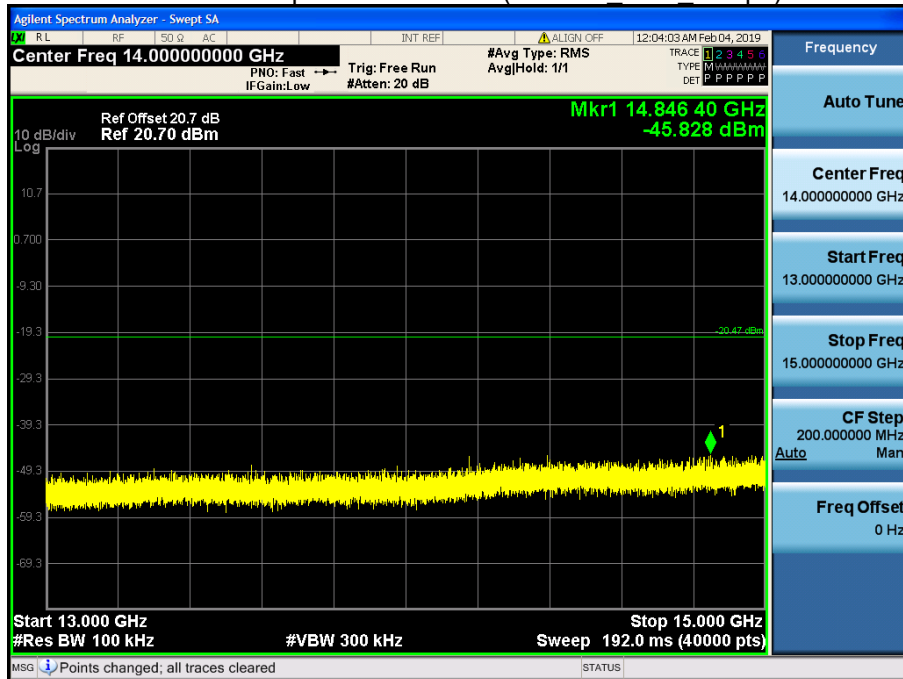


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b Ch.1 1Mbps)

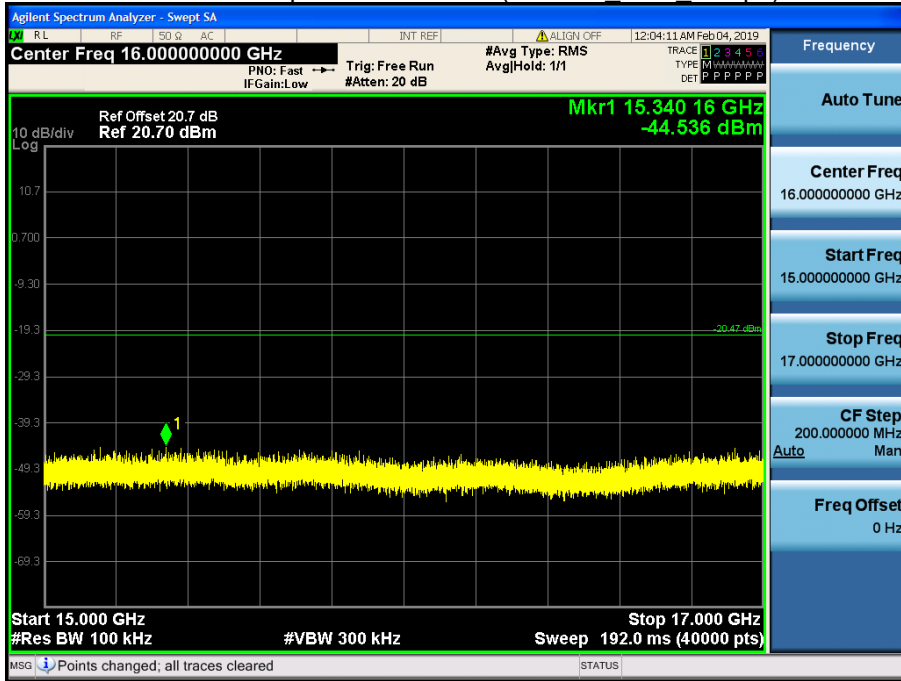


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b Ch.1 1Mbps)

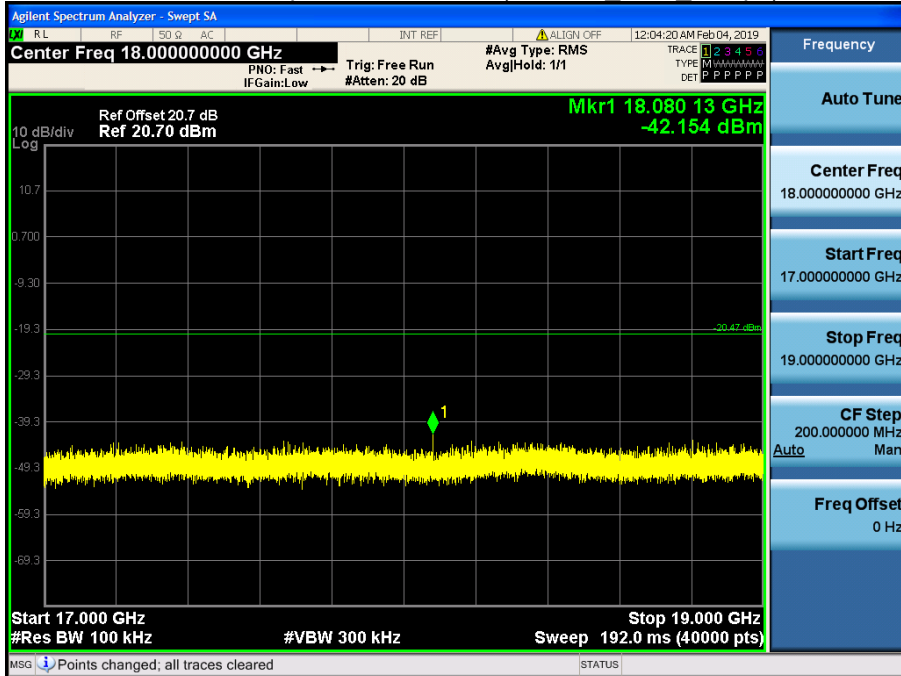


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b Ch.1 1Mbps)

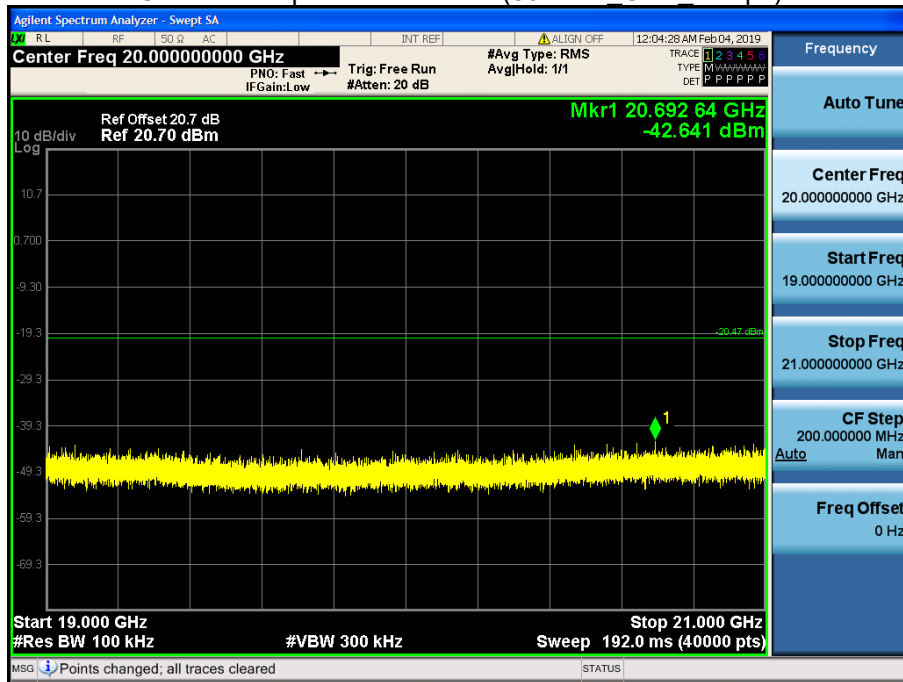


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.1_1Mbps)

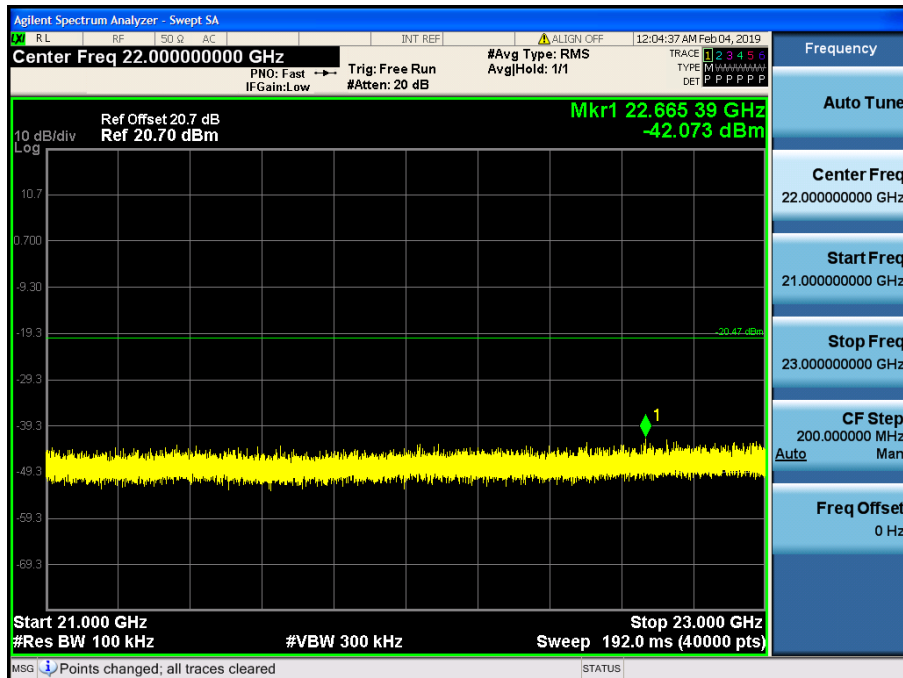

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.1_1Mbps)

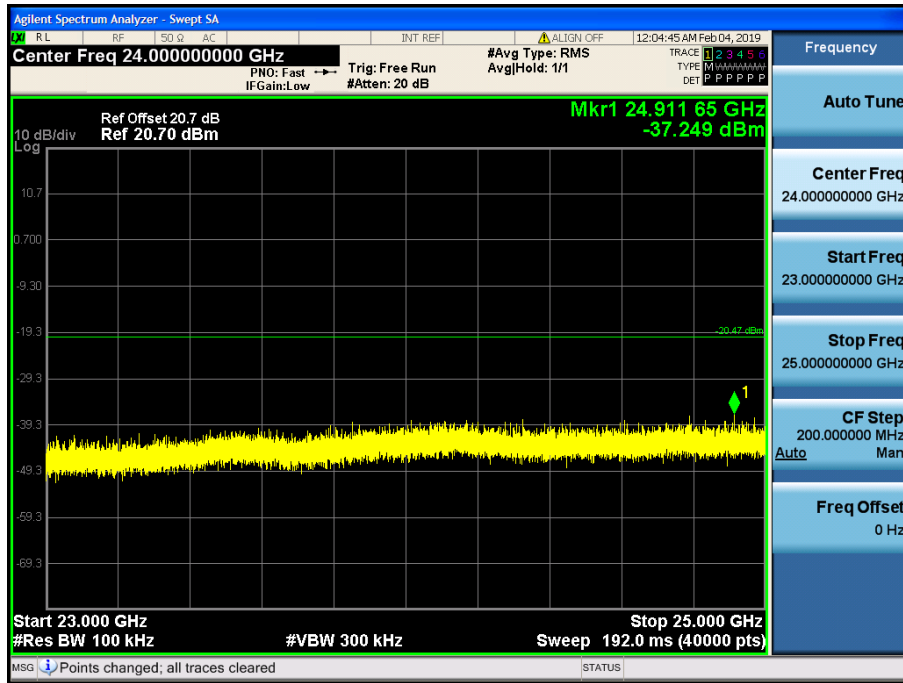

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40 \cdot \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. The test results for below 30 MHz is correlated to an open site.
The result on Open field site is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	50.25	1.95	V	52.20	73.98	21.78	PK
4824	38.82	1.95	V	40.77	53.98	13.21	AV
7236	49.55	9.86	V	59.41	73.98	14.57	PK
7236	36.51	9.86	V	46.37	53.98	7.61	AV
4824	51.15	1.95	H	53.10	73.98	20.88	PK
4824	39.54	1.95	H	41.49	53.98	12.49	AV
7236	49.93	9.86	H	59.79	73.98	14.19	PK
7236	37.76	9.86	H	47.62	53.98	6.36	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	50.09	0.00	1.95	V	52.04	73.98	21.94	PK
4824	38.05	0.30	1.95	V	40.30	53.98	13.68	AV
7236	49.48	0.00	9.86	V	59.34	73.98	14.64	PK
7236	37.44	0.30	9.86	V	47.60	53.98	6.38	AV
4824	51.30	0.00	1.95	H	53.25	73.98	20.73	PK
4824	38.78	0.30	1.95	H	41.03	53.98	12.95	AV
7236	50.36	0.00	9.86	H	60.22	73.98	13.76	PK
7236	38.00	0.30	9.86	H	48.16	53.98	5.82	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	50.45	0.00	1.95	V	52.40	73.98	21.58	PK
4824	37.41	0.32	1.95	V	39.68	53.98	14.30	AV
7236	49.11	0.00	9.86	V	58.97	73.98	15.01	PK
7236	37.24	0.32	9.86	V	47.42	53.98	6.56	AV
4824	51.12	0.00	1.95	H	53.07	73.98	20.91	PK
4824	38.76	0.32	1.95	H	41.03	53.98	12.95	AV
7236	49.96	0.00	9.86	H	59.82	73.98	14.16	PK
7236	38.06	0.32	9.86	H	48.24	53.98	5.74	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	50.25	2.33	V	52.58	73.98	21.40	PK
4874	37.25	2.33	V	39.58	53.98	14.40	AV
7311	50.52	10.14	V	60.66	73.98	13.32	PK
7311	37.19	10.14	V	47.33	53.98	6.65	AV
4874	52.20	2.33	H	54.53	73.98	19.45	PK
4874	38.81	2.33	H	41.14	53.98	12.84	AV
7311	51.27	10.14	H	61.41	73.98	12.57	PK
7311	38.02	10.14	H	48.16	53.98	5.82	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	50.31	0.00	2.33	V	52.64	73.98	21.34	PK
4874	36.46	0.30	2.33	V	39.09	53.98	14.89	AV
7311	50.09	0.00	10.14	V	60.23	73.98	13.75	PK
7311	36.92	0.30	10.14	V	47.36	53.98	6.62	AV
4874	51.20	0.00	2.33	H	53.53	73.98	20.45	PK
4874	38.73	0.30	2.33	H	41.36	53.98	12.62	AV
7311	50.44	0.00	10.14	H	60.58	73.98	13.40	PK
7311	38.05	0.30	10.14	H	48.49	53.98	5.49	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	50.57	0.00	2.33	V	52.90	73.98	21.08	PK
4874	38.74	0.32	2.33	V	41.39	53.98	12.59	AV
7311	49.02	0.00	10.14	V	59.16	73.98	14.82	PK
7311	37.45	0.32	10.14	V	47.91	53.98	6.07	AV
4874	51.54	0.00	2.33	H	53.87	73.98	20.11	PK
4874	38.81	0.32	2.33	H	41.46	53.98	12.52	AV
7311	49.71	0.00	10.14	H	59.85	73.98	14.13	PK
7311	37.99	0.32	10.14	H	48.45	53.98	5.53	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	49.78	2.28	V	52.06	73.98	21.92	PK
4924	38.04	2.28	V	40.32	53.98	13.66	AV
7386	48.47	9.81	V	58.28	73.98	15.70	PK
7386	36.42	9.81	V	46.23	53.98	7.75	AV
4924	50.53	2.28	H	52.81	73.98	21.17	PK
4924	38.16	2.28	H	40.44	53.98	13.54	AV
7386	49.00	9.81	H	58.81	73.98	15.17	PK
7386	37.07	9.81	H	46.88	53.98	7.10	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	49.44	0.00	2.28	V	51.72	73.98	22.26	PK
4924	37.42	0.30	2.28	V	40.00	53.98	13.98	AV
7386	48.27	0.00	9.81	V	58.08	73.98	15.90	PK
7386	36.73	0.30	9.81	V	46.84	53.98	7.14	AV
4924	49.60	0.00	2.28	H	51.88	73.98	22.10	PK
4924	38.06	0.30	2.28	H	40.64	53.98	13.34	AV
7386	49.29	0.00	9.81	H	59.10	73.98	14.88	PK
7386	37.06	0.30	9.81	H	47.17	53.98	6.81	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	49.43	0.00	2.28	V	51.71	73.98	22.27	PK
4924	37.41	0.32	2.28	V	40.01	53.98	13.97	AV
7386	48.68	0.00	9.81	V	58.49	73.98	15.49	PK
7386	36.51	0.32	9.81	V	46.64	53.98	7.34	AV
4924	49.95	0.00	2.28	H	52.23	73.98	21.75	PK
4924	38.07	0.32	2.28	H	40.67	53.98	13.31	AV
7386	50.03	0.00	9.81	H	59.84	73.98	14.14	PK
7386	37.03	0.32	9.81	H	47.16	53.98	6.82	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2467
 Channel No. 12 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	48.71	2.21	V	50.92	73.98	23.06	PK
4934	37.88	2.21	V	40.09	53.98	13.89	AV
7401	49.62	9.78	V	59.40	73.98	14.58	PK
7401	35.81	9.78	V	45.59	53.98	8.39	AV
4934	49.62	2.21	H	51.83	73.98	22.15	PK
4934	37.99	2.21	H	40.20	53.98	13.78	AV
7401	49.39	9.78	H	59.17	73.98	14.81	PK
7401	36.18	9.78	H	45.96	53.98	8.02	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2467
 Channel No. 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	48.96	0.00	2.21	V	51.17	73.98	22.81	PK
4934	37.52	0.30	2.21	V	40.03	53.98	13.95	AV
7401	48.26	0.00	9.78	V	58.04	73.98	15.94	PK
7401	37.02	0.30	9.78	V	47.10	53.98	6.88	AV
4934	49.85	0.00	2.21	H	52.06	73.98	21.92	PK
4934	37.82	0.30	2.21	H	40.33	53.98	13.65	AV
7401	48.95	0.00	9.78	H	58.73	73.98	15.25	PK
7401	37.08	0.30	9.78	H	47.16	53.98	6.82	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2467
 Channel No.: 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	49.73	0.00	2.21	V	51.94	73.98	22.04	PK
4934	37.25	0.32	2.21	V	39.78	53.98	14.20	AV
7401	48.71	0.00	9.78	V	58.49	73.98	15.49	PK
7401	36.84	0.32	9.78	V	46.94	53.98	7.04	AV
4934	49.99	0.00	2.21	H	52.20	73.98	21.78	PK
4934	37.83	0.32	2.21	H	40.36	53.98	13.62	AV
7401	49.82	0.00	9.78	H	59.60	73.98	14.38	PK
7401	37.01	0.32	9.78	H	47.11	53.98	6.87	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2472
 Channel No.: 13 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	50.12	2.35	V	52.47	73.98	21.51	PK
4944	37.24	2.35	V	39.59	53.98	14.39	AV
7416	48.65	9.80	V	58.45	73.98	15.53	PK
7416	36.26	9.80	V	46.06	53.98	7.92	AV
4944	50.49	2.35	H	52.84	73.98	21.14	PK
4944	38.12	2.35	H	40.47	53.98	13.51	AV
7416	49.95	9.80	H	59.75	73.98	14.23	PK
7416	37.23	9.80	H	47.03	53.98	6.95	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2472
 Channel No.: 13 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	48.70	0.00	2.35	V	51.05	73.98	22.93	PK
4944	37.61	0.30	2.35	V	40.26	53.98	13.72	AV
7416	49.33	0.00	9.80	V	59.13	73.98	14.85	PK
7416	36.81	0.30	9.80	V	46.91	53.98	7.07	AV
4944	49.52	0.00	2.35	H	51.87	73.98	22.11	PK
4944	38.11	0.30	2.35	H	40.76	53.98	13.22	AV
7416	49.41	0.00	9.80	H	59.21	73.98	14.77	PK
7416	37.22	0.30	9.80	H	47.32	53.98	6.66	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2472
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	49.64	0.00	2.35	V	51.99	73.98	21.99	PK
4944	37.51	0.32	2.35	V	40.18	53.98	13.80	AV
7416	48.40	0.00	9.80	V	58.20	73.98	15.78	PK
7416	36.22	0.32	9.80	V	46.34	53.98	7.64	AV
4944	50.15	0.00	2.35	H	52.50	73.98	21.48	PK
4944	38.08	0.32	2.35	H	40.75	53.98	13.23	AV
7416	49.82	0.00	9.80	H	59.62	73.98	14.36	PK
7416	37.25	0.32	9.80	H	47.37	53.98	6.61	AV


■ Test Plots

Radiated Spurious Emissions plot – Average Reading (802.11g, Ch.6 3rd Harmonic, X-H)

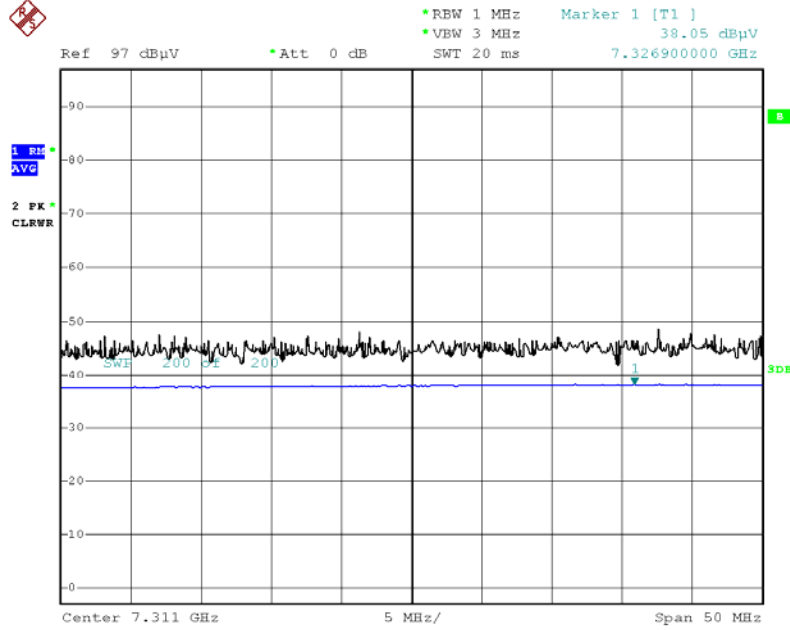

Date: 14.FEB.2019 11:35:43

Radiated Spurious Emissions plot – Peak Reading (802.11g, Ch.6 3rd Harmonic, X-H)

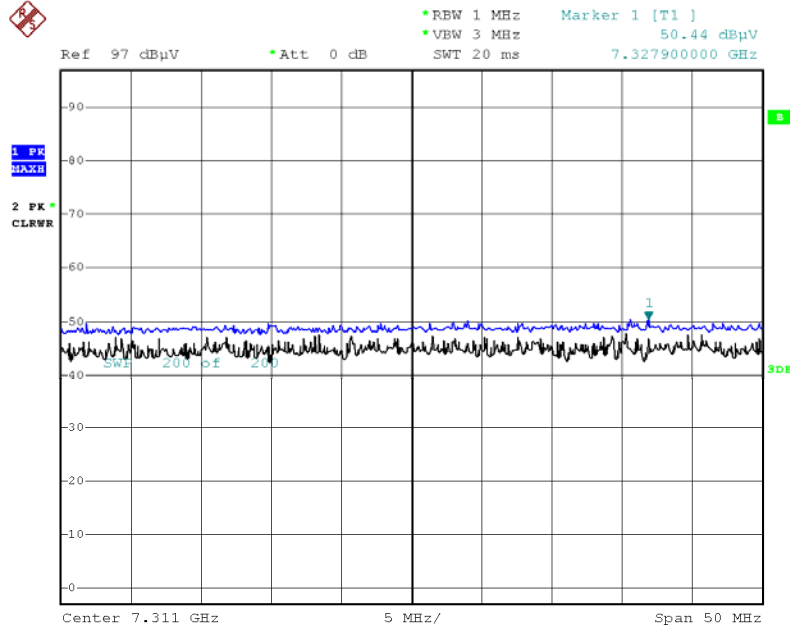

Date: 14.FEB.2019 11:37:30

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz 2467 MHz, 2472 MHz
Channel No.	01 Ch, 11 Ch, 12 Ch, 13 Ch

01.ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	56.34	0.85	H	57.19	73.98	16.79	PK
2390.0	45.18	0.85	H	46.03	53.98	7.95	AV
2390.0	54.78	0.85	V	55.63	73.98	18.35	PK
2390.0	44.32	0.85	V	45.17	53.98	8.81	AV

11.ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	58.55	1.13	H	59.68	73.98	14.30	PK
2483.5	43.91	1.13	H	45.04	53.98	8.94	AV
2483.5	57.46	1.13	V	58.59	73.98	15.39	PK
2483.5	43.20	1.13	V	44.33	53.98	9.65	AV

12.ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	55.39	1.13	H	56.52	73.98	17.46	PK
2483.5	43.07	1.13	H	44.20	53.98	9.78	AV
2483.5	54.27	1.13	V	55.40	73.98	18.58	PK
2483.5	42.79	1.13	V	43.92	53.98	10.06	AV

13.ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	54.84	1.13	H	55.97	73.98	18.01	PK
2483.5	42.26	1.13	H	43.39	53.98	10.59	AV
2483.5	52.74	1.13	V	53.87	73.98	20.11	PK
2483.5	40.66	1.13	V	41.79	53.98	12.19	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz, 2417 MHz 2457 MHz, 2462 MHz 2467 MHz, 2472 MHz
Channel No.	01 Ch, 02 Ch, 10 Ch, 11 Ch, 12 Ch, 13 Ch

01.ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	67.29	0.00	0.85	H	68.14	73.98	5.84	PK
2390.0	47.32	0.30	0.85	H	48.47	53.98	5.51	AV
2390.0	66.34	0.00	0.85	V	67.19	73.98	6.79	PK
2390.0	46.91	0.30	0.85	V	48.06	53.98	5.92	AV

02.ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	65.79	0.00	0.85	H	66.64	73.98	7.34	PK
2390.0	45.41	0.30	0.85	H	46.56	53.98	7.42	AV
2390.0	63.87	0.00	0.85	V	64.72	73.98	9.26	PK
2390.0	44.26	0.30	0.85	V	45.41	53.98	8.57	AV

10.ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	65.92	0.00	1.13	H	67.05	73.98	6.93	PK
2483.5	47.94	0.30	1.13	H	49.37	53.98	4.61	AV
2483.5	63.88	0.00	1.13	V	65.01	73.98	8.97	PK
2483.5	46.72	0.30	1.13	V	48.15	53.98	5.83	AV

11.ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	67.67	0.00	1.13	H	68.80	73.98	5.18	PK
2483.5	46.22	0.30	1.13	H	47.65	53.98	6.33	AV
2483.5	65.54	0.00	1.13	V	66.67	73.98	7.31	PK
2483.5	45.37	0.30	1.13	V	46.80	53.98	7.18	AV

12.ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	57.77	0.00	1.13	H	58.90	73.98	15.08	PK
2483.5	43.94	0.30	1.13	H	45.37	53.98	8.61	AV
2483.5	56.43	0.00	1.13	V	57.56	73.98	16.42	PK
2483.5	42.61	0.30	1.13	V	44.04	53.98	9.94	AV

13.ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	65.75	0.00	1.13	H	66.88	73.98	7.10	PK
2483.5	46.33	0.30	1.13	H	47.76	53.98	6.22	AV
2483.5	65.12	0.00	1.13	V	66.25	73.98	7.73	PK
2483.5	45.28	0.30	1.13	V	46.71	53.98	7.27	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz, 2417 MHz,
 2457 MHz
 Channel No. 01 Ch, 02 Ch, 10 Ch

01.ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	68.18	0.00	0.85	H	69.03	73.98	4.95	PK
2390.0	48.87	0.32	0.85	H	50.04	53.98	3.94	AV
2390.0	67.88	0.00	0.85	V	68.73	73.98	5.25	PK
2390.0	47.68	0.32	0.85	V	48.85	53.98	5.13	AV

02.ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	64.97	0.00	0.85	H	65.82	73.98	8.16	PK
2390.0	45.25	0.32	0.85	H	46.42	53.98	7.56	AV
2390.0	63.39	0.00	0.85	V	64.24	73.98	9.74	PK
2390.0	44.71	0.32	0.85	V	45.88	53.98	8.10	AV

10.ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	65.57	0.00	1.13	H	66.70	73.98	7.28	PK
2483.5	47.83	0.32	1.13	H	49.28	53.98	4.70	AV
2483.5	64.81	0.00	1.13	V	65.94	73.98	8.04	PK
2483.5	46.33	0.32	1.13	V	47.78	53.98	6.20	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2462 MHz, 2467 MHz
 2472 MHz
 Channel No. 11 Ch, 12 Ch, 13 Ch

11.ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*2484.0	62.48	0.00	1.13	H	63.61	73.98	10.37	PK
*2484.0	48.52	0.32	1.13	H	49.97	53.98	4.01	AV
*2485.0	61.41	0.00	1.13	H	62.54	73.98	11.44	PK
*2485.0	47.90	0.32	1.13	H	49.35	53.98	4.63	AV
2485.5	67.89	0.00	1.13	H	69.02	73.98	4.96	PK
2485.5	45.81	0.32	1.13	H	47.26	53.98	6.72	AV
2485.5	65.97	0.00	1.13	V	67.10	73.98	6.88	PK
2485.5	45.28	0.32	1.13	V	46.73	53.98	7.25	AV

*Integration method
 2484.0 : 2483.5~2484.5MHz / 2485.0 : 2484.5~2485.5MHz

12.ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	57.43	0.00	1.13	H	58.56	73.98	15.42	PK
2483.5	43.93	0.32	1.13	H	45.38	53.98	8.60	AV
2483.5	56.41	0.00	1.13	V	57.54	73.98	16.44	PK
2483.5	42.61	0.32	1.13	V	44.06	53.98	9.92	AV

13.ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	66.05	0.00	1.13	H	67.18	73.98	6.80	PK
2483.5	46.51	0.32	1.13	H	47.96	53.98	6.02	AV
2483.5	65.53	0.00	1.13	V	66.66	73.98	7.32	PK
2483.5	44.82	0.32	1.13	V	46.27	53.98	7.71	AV


■ Test Plots

Radiated Restricted Band Edges plot – Average Reading (802.11n (HT20) Ch.1, X-H)

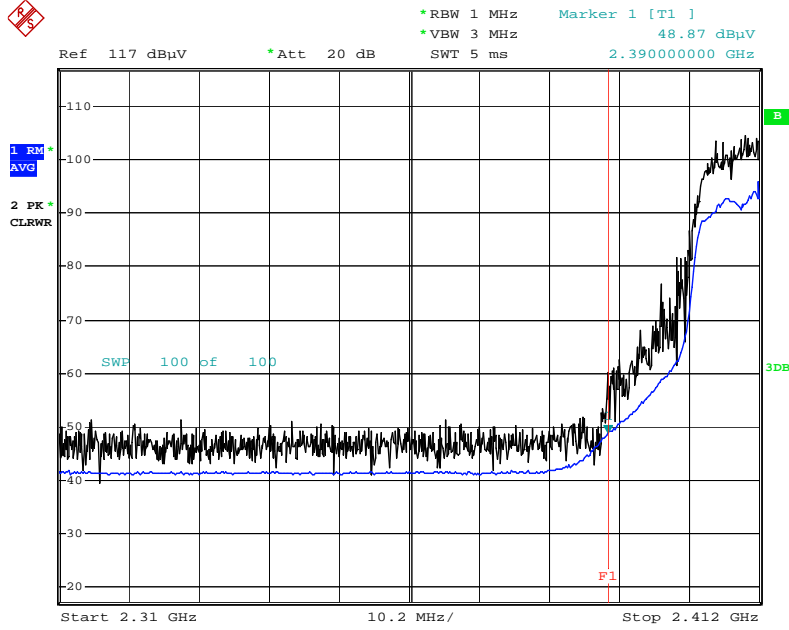

Date: 11.FEB.2019 13:59:12

Radiated Restricted Band Edges plot – Peak Reading (802.11n (HT20) Ch.1, X-H)

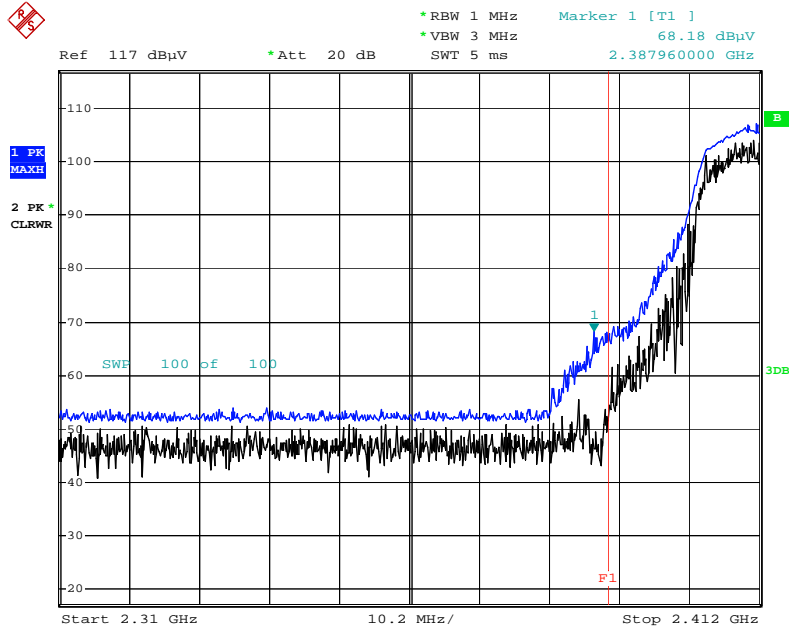

Date: 11.FEB.2019 13:58:54

Note:

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

2.4G WLAN_N


1 / 2

HCT TEST Report

Common Information

EUT: SM-M105MDS
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: 2.4G WLAN_N

FCC CLASS B_Exten Cable

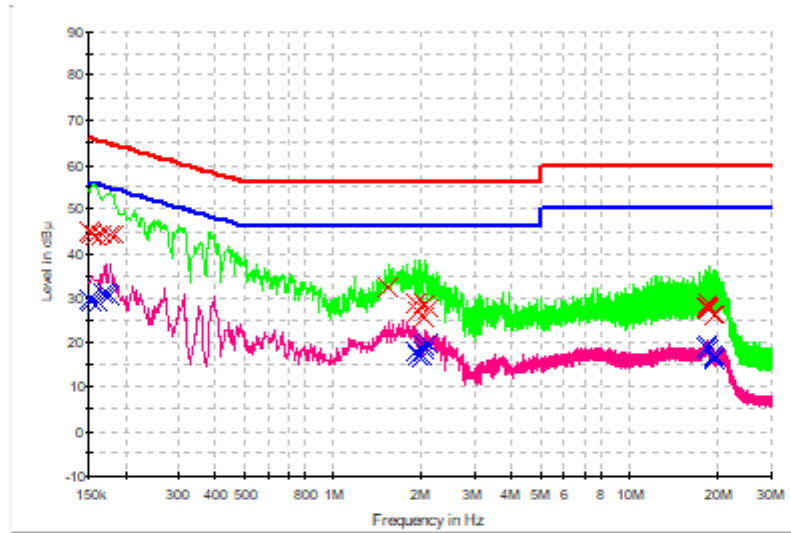

— FCC CLASS B QP — FCC CLASS B AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	45.1	9.000	Off	N	9.8	20.9	65.0
0.154000	44.6	9.000	Off	N	9.8	21.2	65.8
0.158000	44.0	9.000	Off	N	9.8	21.5	65.6
0.164000	44.1	9.000	Off	N	9.8	21.1	65.3
0.176000	44.4	9.000	Off	N	9.8	20.3	64.7
0.182000	44.4	9.000	Off	N	9.8	20.0	64.4
1.536000	32.2	9.000	Off	N	10.1	23.8	56.0
1.904000	29.0	9.000	Off	N	10.0	27.0	56.0
1.954000	26.9	9.000	Off	N	10.0	29.1	56.0
2.032000	28.7	9.000	Off	N	10.0	27.3	56.0
2.046000	25.4	9.000	Off	N	10.0	30.6	56.0
2.088000	27.7	9.000	Off	N	10.0	28.3	56.0
18.194000	27.9	9.000	Off	N	10.8	32.1	60.0
18.400000	28.7	9.000	Off	N	10.8	31.3	60.0
18.578000	27.9	9.000	Off	N	10.8	32.1	60.0
18.582000	27.5	9.000	Off	N	10.8	32.5	60.0
19.348000	26.3	9.000	Off	N	10.9	33.7	60.0
19.394000	26.1	9.000	Off	N	10.9	33.9	60.0

2019-02-04

오후 4:24:41

2.4G WLAN_N

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	29.7	9.000	Off	N	9.8	26.3	56.0
0.154000	29.3	9.000	Off	N	9.8	26.5	55.8
0.160000	29.0	9.000	Off	N	9.8	26.4	55.5
0.168000	31.1	9.000	Off	N	9.8	23.9	55.1
0.172000	31.1	9.000	Off	N	9.8	23.8	54.9
0.176000	30.8	9.000	Off	N	9.8	23.9	54.7
1.906000	18.1	9.000	Off	N	10.0	27.9	46.0
1.954000	17.2	9.000	Off	N	10.0	28.8	46.0
1.998000	16.7	9.000	Off	N	10.0	29.3	46.0
2.032000	19.3	9.000	Off	N	10.0	26.7	46.0
2.046000	18.3	9.000	Off	N	10.0	27.7	46.0
2.088000	19.8	9.000	Off	N	10.0	26.2	46.0
18.194000	18.3	9.000	Off	N	10.8	31.1	50.0
18.400000	19.5	9.000	Off	N	10.8	30.5	50.0
18.582000	18.3	9.000	Off	N	10.8	31.7	50.0
19.348000	17.0	9.000	Off	N	10.9	33.0	50.0
19.392000	16.7	9.000	Off	N	10.9	33.3	50.0
19.488000	16.1	9.000	Off	N	10.9	33.9	50.0

2019-02-04

오후 4:24:41

Conducted Emissions (Line 2)

2.4G WLAN_L1


1 / 2

HCT TEST Report

Common Information

EUT: SM-M105M/DS
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: 2.4G WLAN_L1

FCC CLASS B_Exten Cable

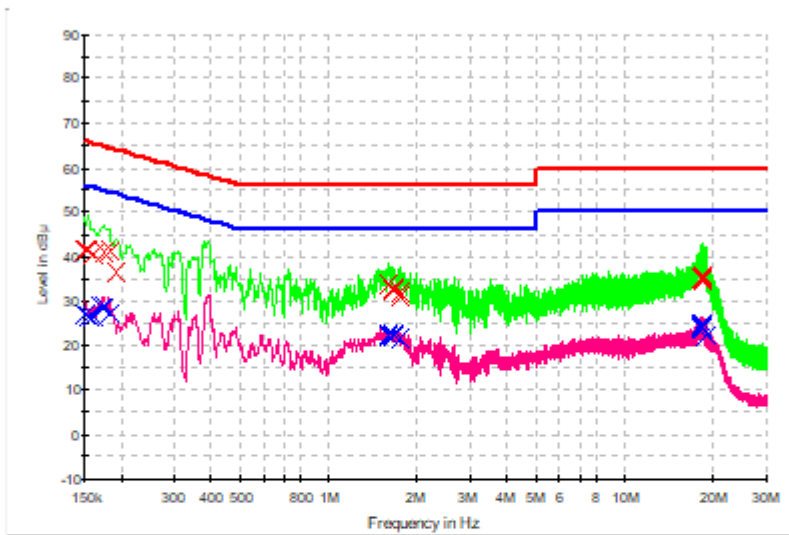

— FCC CLASS B OP
 — FCC CLASS B AV
 — Preview Result 1-PK+
— Preview Result 2-AVG
 x Final Result 1-OPK
 x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	41.7	9.000	Off	L1	9.7	24.3	66.0
0.154000	41.4	9.000	Off	L1	9.7	24.3	65.8
0.160000	40.4	9.000	Off	L1	9.7	25.1	65.5
0.174000	40.8	9.000	Off	L1	9.7	23.9	64.8
0.182000	41.0	9.000	Off	L1	9.7	23.4	64.4
0.192000	36.4	9.000	Off	L1	9.7	27.6	63.9
1.602000	33.9	9.000	Off	L1	9.9	22.1	56.0
1.646000	32.9	9.000	Off	L1	9.9	23.1	56.0
1.652000	33.0	9.000	Off	L1	9.9	23.0	56.0
1.658000	32.4	9.000	Off	L1	9.9	23.6	56.0
1.744000	31.9	9.000	Off	L1	9.9	24.1	56.0
1.748000	30.9	9.000	Off	L1	9.9	25.1	56.0
18.176000	35.2	9.000	Off	L1	10.5	24.8	60.0
18.266000	34.9	9.000	Off	L1	10.5	25.1	60.0
18.270000	34.8	9.000	Off	L1	10.5	25.2	60.0
18.362000	35.5	9.000	Off	L1	10.5	24.5	60.0
18.368000	35.0	9.000	Off	L1	10.5	25.0	60.0
18.386000	35.7	9.000	Off	L1	10.5	24.3	60.0

2019-02-04

오후 4:34:30

2.4G WLAN_L1

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	27.1	9.000	Off	L1	9.7	28.9	56.0
0.156000	26.5	9.000	Off	L1	9.7	29.2	55.7
0.160000	26.4	9.000	Off	L1	9.7	29.0	55.5
0.170000	28.5	9.000	Off	L1	9.7	26.4	55.0
0.174000	28.7	9.000	Off	L1	9.7	26.1	54.8
0.182000	27.4	9.000	Off	L1	9.7	27.0	54.4
1.598000	22.2	9.000	Off	L1	9.9	23.8	46.0
1.602000	22.6	9.000	Off	L1	9.9	23.4	46.0
1.646000	22.0	9.000	Off	L1	9.9	24.0	46.0
1.650000	22.5	9.000	Off	L1	9.9	23.5	46.0
1.658000	22.6	9.000	Off	L1	9.9	23.4	46.0
1.744000	21.4	9.000	Off	L1	9.9	24.6	46.0
18.044000	23.9	9.000	Off	L1	10.5	26.1	50.0
18.100000	24.4	9.000	Off	L1	10.5	25.6	50.0
18.172000	24.8	9.000	Off	L1	10.5	25.2	50.0
18.344000	24.9	9.000	Off	L1	10.5	25.1	50.0
18.368000	23.9	9.000	Off	L1	10.5	26.1	50.0
18.714000	22.3	9.000	Off	L1	10.6	27.7	50.0

2019-02-04

오후 4:34:30

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/27/2018	Annual	100033
ESPAC	SU-642 /Temperature Chamber	03/30/2018	Annual	0093008124
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY52090906
Agilent	N1911A / Power Meter	04/16/2018	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/16/2018	Annual	MY52260025
Hewlett Packard	11667B / Power Splitter	06/07/2018	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/26/2018	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2018	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/17/2018	Annual	100422
MCE/Weinschel	2-20/ Attenuator(20 dB)	10/26/2018	Annual	BR0592

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/09/2018	Annual	3368
Schwarzbeck	BBHA 9120D / Horn Antenna	06/30/2017	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 40 GHz) / Spectrum Analyzer	07/24/2018	Annual	100843
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	01/03/2019	Annual	F6
Wainwright Instruments	WHFX7.0/18G-8SS / High Pass Filter	05/09/2018	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/29/2018	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Weinschel	2-3 / Attenuator (3 dB)	10/10/2018	Annual	BR0617
H+S	5910-N-50-010 / Attenuator(10 dB)	11/08/2018	Annual	NONE
CERNEX	CBLU1183540B-01 / Power Amplifier	12/21/2018	Annual	25540
CERNEX	CBL06185030 / Power Amplifier	03/28/2018	Annual	28550
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/29/2018	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/27/2018	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1902-FC057-P
2	HCT-RF-1902-FC058-P
3	HCT-RF-1902-FC059-P