

FCC Sub6 REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

December 27, 2022

Location:

HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Address:

129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Report No.: HCT-RF-2212-FC013

FCC ID:

A3LSMM146B

APPLICANT:

SAMSUNG Electronics Co., Ltd.

Model(s): SM-M146B/DSN
EUT Type: Mobile phone
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §27, §2

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
Sub6 n41 (10)	2501.010 – 2685.000	8M71G7D	PI/2 BPSK	0.153	21.84
		8M74G7D	QPSK	0.152	21.81
		8M70W7D	16QAM	0.126	20.99
		8M74W7D	64QAM	0.085	19.27
		8M75W7D	256QAM	0.053	17.22
Sub6 n41 (15)	2503.500 – 2682.480	13M0G7D	PI/2 BPSK	0.157	21.96
		13M0G7D	QPSK	0.156	21.94
		13M1W7D	16QAM	0.128	21.07
		13M0W7D	64QAM	0.091	19.59
		13M0W7D	256QAM	0.055	17.42
Sub6 n41 (20)	2506.020 – 2679.990	18M0G7D	PI/2 BPSK	0.163	22.11
		18M0G7D	QPSK	0.162	22.09
		18M0W7D	16QAM	0.124	20.94
		18M0W7D	64QAM	0.089	19.50
		18M0W7D	256QAM	0.056	17.44
Sub6 n41 (30)	2511.000 – 2674.980	27M0G7D	PI/2 BPSK	0.159	22.01
		27M0G7D	QPSK	0.156	21.92
		27M0W7D	16QAM	0.124	20.95
		27M0W7D	64QAM	0.085	19.30
		27M0W7D	256QAM	0.055	17.41
Sub6 n41 (40)	2516.010 – 2670.000	36M0G7D	PI/2 BPSK	0.149	21.74
		36M1G7D	QPSK	0.149	21.72
		35M9W7D	16QAM	0.117	20.68
		35M9W7D	64QAM	0.083	19.19
		35M9W7D	256QAM	0.053	17.28
Sub6 n41 (50)	2521.020 – 2664.990	45M9G7D	PI/2 BPSK	0.146	21.63
		46M0G7D	QPSK	0.145	21.60
		45M9W7D	16QAM	0.113	20.53
		45M8W7D	64QAM	0.080	19.01
		46M0W7D	256QAM	0.051	17.04
Sub6 n41 (60)	2526.000 – 2659.980	58M3G7D	PI/2 BPSK	0.147	21.68
		58M1G7D	QPSK	0.147	21.66
		58M1W7D	16QAM	0.118	20.72
		58M0W7D	64QAM	0.082	19.12
		58M2W7D	256QAM	0.052	17.13
Sub6 n41 (70)	2531.010 – 2655.000	64M9G7D	PI/2 BPSK	0.139	21.44
		64M8G7D	QPSK	0.139	21.43
		64M6W7D	16QAM	0.112	20.51
		64M7W7D	64QAM	0.077	18.89
		64M7W7D	256QAM	0.049	16.94
Sub6 n41 (80)	2536.020 – 2649.990	77M4G7D	PI/2 BPSK	0.145	21.61
		77M4G7D	QPSK	0.144	21.58
		77M4W7D	16QAM	0.113	20.54
		77M6W7D	64QAM	0.079	18.95
		77M4W7D	256QAM	0.050	16.96
Sub6 n41 (90)	2541.000 – 2644.980	87M1G7D	PI/2 BPSK	0.146	21.63
		87M0G7D	QPSK	0.143	21.56
		87M1W7D	16QAM	0.112	20.50
		87M2W7D	64QAM	0.083	19.20
		86M9W7D	256QAM	0.050	17.03
Sub6 n41 (100)	2546.010 – 2640.000	96M6G7D	PI/2 BPSK	0.138	21.39
		96M7G7D	QPSK	0.135	21.29
		97M0W7D	16QAM	0.109	20.37
		96M7W7D	64QAM	0.077	18.85
		97M0W7D	256QAM	0.048	16.82

Report No.: HCT-RF-2212-FC013

REVIEWED BY



Report prepared by : Jung Ki Lim
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2212-FC013	December 27, 2022	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	3
1. GENERAL INFORMATION	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER.....	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH.	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	14
3.7 CHANNEL EDGE	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
3.9 WORST CASE(RADIATED TEST)	18
3.10 WORST CASE(CONDUCTED TEST)	19
4. LIST OF TEST EQUIPMENT	21
5. MEASUREMENT UNCERTAINTY	22
6. SUMMARY OF TEST RESULTS	23
7. SAMPLE CALCULATION	24
8. TEST DATA	26
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	26
8.2 RADIATED SPURIOUS EMISSIONS	37
8.3 PEAK-TO-AVERAGE RATIO.....	48
8.4 OCCUPIED BANDWIDTH	49
8.5 CONDUCTED SPURIOUS EMISSIONS	50
8.6 CHANNEL EDGE	52
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	55
9. TEST PLOTS.....	66
11. ANNEX A_ TEST SETUP PHOTO	320

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMM146B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile phone
Model(s):	SM-M146B/DSN
SCS(kHz):	30
Bandwidth(MHz):	10, 15, 20, 30, 40, 50, 60, 70, 80, 90, 100
Waveform:	CP-OFDM, DFT-S-OFDM
Modulation:	DFT-S-OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
Tx Frequency(SCS 30kHz):	2501.010 – 2685.000 : 10 MHz 2503.500 – 2682.480 : 15 MHz 2506.020 – 2679.990 : 20 MHz 2511.000 – 2674.980 : 30 MHz 2516.010 – 2670.000 : 40 MHz 2521.020 – 2664.990 : 50 MHz 2526.000 – 2659.980 : 60 MHz 2531.010 – 2655.000 : 70 MHz 2536.020 – 2649.990 : 80 MHz 2541.000 – 2644.980 : 90 MHz 2546.010 – 2640.000 : 100 MHz
Date(s) of Tests:	November 25, 2022 ~ December 23, 2022
Serial number:	Radiated: R3CTA0GVSYB Conducted: R3CTA0GW2KB

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac (20/40/80 MHz), NFC, Bluetooth, BT LE.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

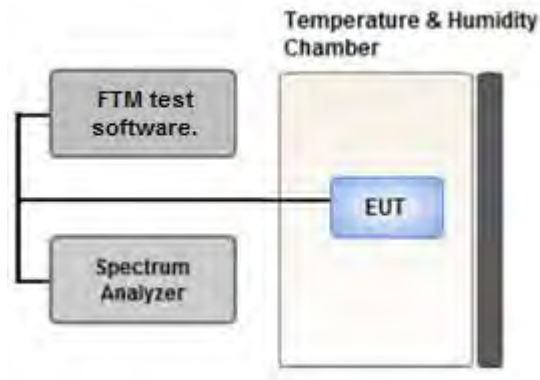

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times$ (number of points in sweep) \times (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

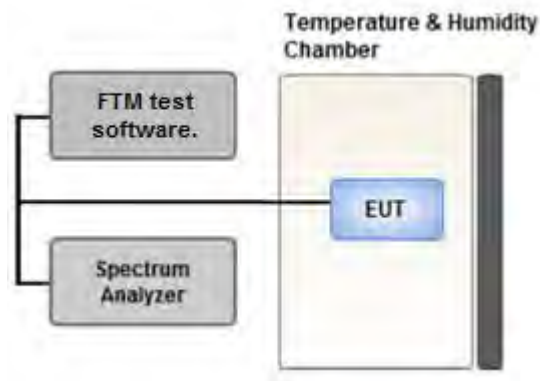

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

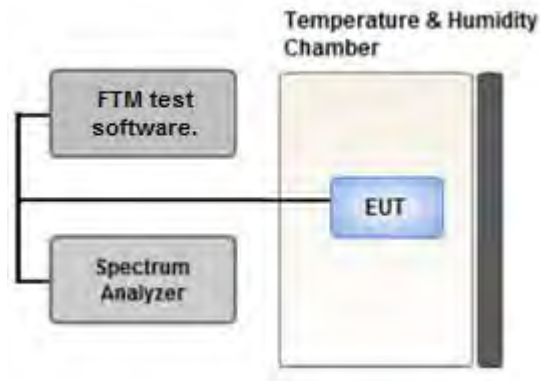

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 CHANNEL EDGE

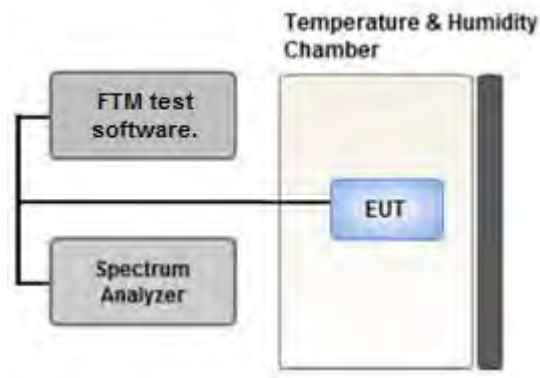

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum power and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1 MHz of the channel edge the RBW should be 2 % of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

1. The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2. $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3. $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz.
5. $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
6. X is the greater of 6MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz/ RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

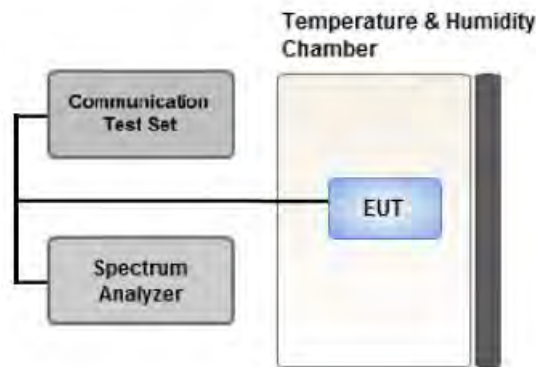

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.
(Worst case: DFT-S-OFDM)
- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode: SA, NSA, SRS
Worst case: SA
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
Mode : Stand alone, Simultaneous transmission scenarios
Worst case : Stand alone
- Radiated Spurious emissions are measured while operating in EN-DC mode with Sub 6 NR carrier as well as an LTE carrier (anchor).
All EN-DC mode of operation were investigated and the worst case configuration results are reported.
(Worst case: 2A-n41A)
- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.
Please refer to the table below.

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		X,Z
Radiated Spurious and Harmonic Emissions	PI/2 BPSK	See Section 8.2		Z

3.10 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.

(Worst case: PI/2 BPSK)

- All modes of operation were investigated and the worst case configuration results are reported.

Mode: SA, NSA, SRS

Worst case: SA

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth, Peak-To-Average Ratio	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	10, 15, 20, 30, 40, 50, 60, 80, 90, 100	Mid	Full RB	0
Channel Edge	PI/2 BPSK	10	Low	1	0
			High	1	23
		15	Low	1	0
			High	1	37
		20	Low	1	0
			High	1	50
		30	Low	1	0
			High	1	77
		40	Low	1	0
			High	1	105
		50	Low	1	0
			High	1	132
		60	Low	1	0
			High	1	161
		70	Low	1	0
			High	1	188
		80	Low	1	0
			High	1	216
		90	Low	1	0
			High	1	244
100	Low	1	0		
	High	1	272		
		10, 15, 20, 30, 40, 50, 60, 80, 90, 100	Low, Mid High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	PI/2 BPSK	10, 15, 20, 30, 40, 50, 60, 80, 90, 100	Low, Mid, High	1	1

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
Precision Dipole Antenna	UHAP	Schwarzbeck	01273	03/27/2024	Biennial
Precision Dipole Antenna	UHAP	Schwarzbeck	01274	03/27/2024	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	02289	03/21/2024	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1299	05/04/2023	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Loop Antenna(9 kHz~30 MHz)	FMZB1513	Rohde & Schwarz	1513-175	06/04/2023	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/22/2023	Biennial
High Pass Filter	WHKX10-900-1000-15000-40SS	Wainwright Instruments	15	05/18/2023	Annual
High Pass Filter	WHKX10-2700-3000-18000-40SS	Wainwright Instruments	145	05/18/2023	Annual
High Pass Filter	WHNX6-4740-6000-26500-40CC	Wainwright Instruments	11	05/18/2023	Annual
LOW NOISE AMP (100 MHz ~ 18 GHz)	CBLU1183540B-01	CERNEC	26822	05/18/2023	Annual
Power Amplifier	CBL18265035	CERNEC	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEC	25956	03/11/2023	Annual
DC Power Supply	E3632A	Hewlett Packard	MY40004427	09/05/2023	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Signal Analyzer(10 Hz~26.5 GHz)	N9020A	Agilent	MY51110063	04/19/2023	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	05/18/2023	Annual
Spectrum Analyzer(10 Hz~40 GHz)	FSV40	REOHDE & SCHWARZ	101436	02/25/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2023	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287700	05/19/2023	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/18/2023	Annual
SIGNAL GENERATOR (100 kHz~40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz~40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/27/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	<ul style="list-style-type: none"> ■ $< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges ■ $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges ■ $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges ■ $< 43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz 	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report
2. All conducted tests were tested using 5G Wireless Tester.

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}])$	PASS

Note:

1. Radiated tests were tested using 5G Wireless Tester.

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
518598	2593.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2501.010	Sub6 41/ 10 MHz [30 kHz]	PI/2 BPSK	-22.63	14.01	10.30	2.47	V	< 2.00	0.153	21.84	1	1
		QPSK	-22.66	13.98	10.30	2.47	V		0.152	21.81		
		16-QAM	-23.48	13.16	10.30	2.47	V		0.126	20.99		
		64-QAM	-25.20	11.44	10.30	2.47	V		0.085	19.27		
		256-QAM	-27.25	9.39	10.30	2.47	V		0.053	17.22		
2592.990		PI/2 BPSK	-24.81	11.49	10.05	2.50	V		0.080	19.04	1	1
		QPSK	-24.82	11.48	10.05	2.50	V		0.080	19.03		
		16-QAM	-25.71	10.59	10.05	2.50	V		0.065	18.14		
		64-QAM	-27.30	9.00	10.05	2.50	V		0.045	16.55		
		256-QAM	-29.38	6.92	10.05	2.50	V		0.028	14.47		
2685.000	PI/2 BPSK	-24.91	12.55	10.10	2.58	H	0.102	20.07	1	12		
	QPSK	-25.01	12.45	10.10	2.58	H	0.099	19.97				
	16-QAM	-25.81	11.65	10.10	2.58	H	0.083	19.17				
	64-QAM	-27.66	9.80	10.10	2.58	H	0.054	17.32				
	256-QAM	-29.49	7.97	10.10	2.58	H	0.035	15.49				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2503.500	Sub6 41/ 15 MHz [30 kHz]	PI/2 BPSK	-22.49	14.14	10.30	2.48	V	< 2.00	0.157	21.96	1	1
		QPSK	-22.51	14.12	10.30	2.48	V		0.156	21.94		
		16-QAM	-23.38	13.25	10.30	2.48	V		0.128	21.07		
		64-QAM	-24.86	11.77	10.30	2.48	V		0.091	19.59		
		256-QAM	-27.03	9.60	10.30	2.48	V		0.055	17.42		
2592.990		PI/2 BPSK	-24.71	11.59	10.05	2.50	V		0.082	19.14	1	19
		QPSK	-24.81	11.49	10.05	2.50	V		0.080	19.04		
		16-QAM	-25.81	10.49	10.05	2.50	V		0.064	18.04		
		64-QAM	-27.44	8.86	10.05	2.50	V		0.044	16.41		
		256-QAM	-29.33	6.97	10.05	2.50	V		0.028	14.52		
2682.480		PI/2 BPSK	-24.93	12.78	10.10	2.58	H		0.107	20.30	1	1
		QPSK	-24.92	12.79	10.10	2.58	H		0.107	20.31		
		16-QAM	-25.95	11.76	10.10	2.58	H		0.085	19.28		
		64-QAM	-27.66	10.05	10.10	2.58	H		0.057	17.57		
		256-QAM	-29.46	8.25	10.10	2.58	H		0.038	15.77		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2506.020	Sub6 41/ 20 MHz [30 kHz]	PI/2 BPSK	-22.34	14.29	10.30	2.48	V	< 2.00	0.163	22.11	1	1
		QPSK	-22.36	14.27	10.30	2.48	V		0.162	22.09		
		16-QAM	-23.51	13.12	10.30	2.48	V		0.124	20.94		
		64-QAM	-24.95	11.68	10.30	2.48	V		0.089	19.50		
		256-QAM	-27.01	9.62	10.30	2.48	V		0.056	17.44		
2592.990		PI/2 BPSK	-24.81	11.49	10.05	2.50	V		0.080	19.04	1	25
		QPSK	-24.89	11.41	10.05	2.50	V		0.079	18.96		
		16-QAM	-25.81	10.49	10.05	2.50	V		0.064	18.04		
		64-QAM	-27.24	9.06	10.05	2.50	V		0.046	16.61		
		256-QAM	-29.31	6.99	10.05	2.50	V		0.029	14.54		
2679.990		PI/2 BPSK	-25.00	12.71	10.10	2.58	H		0.105	20.23	1	1
		QPSK	-25.06	12.65	10.10	2.58	H		0.104	20.17		
		16-QAM	-26.06	11.65	10.10	2.58	H		0.083	19.17		
		64-QAM	-27.65	10.06	10.10	2.58	H		0.057	17.58		
		256-QAM	-29.71	8.00	10.10	2.58	H		0.036	15.52		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2511.000	Sub6 41/ 30 MHz [30 kHz]	PI/2 BPSK	-22.41	14.21	10.30	2.50	V	< 2.00	0.159	22.01	1	1
		QPSK	-22.50	14.12	10.30	2.50	V		0.156	21.92		
		16-QAM	-23.47	13.15	10.30	2.50	V		0.124	20.95		
		64-QAM	-25.12	11.50	10.30	2.50	V		0.085	19.30		
		256-QAM	-27.01	9.61	10.30	2.50	V		0.055	17.41		
2592.990		PI/2 BPSK	-24.76	11.54	10.05	2.50	V		0.081	19.09	1	39
		QPSK	-24.91	11.39	10.05	2.50	V		0.078	18.94		
		16-QAM	-25.71	10.59	10.05	2.50	V		0.065	18.14		
		64-QAM	-27.29	9.01	10.05	2.50	V		0.045	16.56		
		256-QAM	-29.37	6.93	10.05	2.50	V		0.028	14.48		
2674.980	PI/2 BPSK	-24.86	12.55	10.10	2.58	H	0.102	20.07	1	1		
	QPSK	-24.95	12.46	10.10	2.58	H	0.100	19.98				
	16-QAM	-25.96	11.45	10.10	2.58	H	0.079	18.97				
	64-QAM	-27.53	9.88	10.10	2.58	H	0.055	17.40				
	256-QAM	-29.46	7.95	10.10	2.58	H	0.035	15.47				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2516.010	Sub6 41/ 40 MHz [30 kHz]	PI/2 BPSK	-22.54	13.95	10.30	2.51	V	< 2.00	0.149	21.74	1	1
		QPSK	-22.56	13.93	10.30	2.51	V		0.149	21.72		
		16-QAM	-23.60	12.89	10.30	2.51	V		0.117	20.68		
		64-QAM	-25.09	11.40	10.30	2.51	V		0.083	19.19		
		256-QAM	-27.00	9.49	10.30	2.51	V		0.053	17.28		
2592.990		PI/2 BPSK	-24.76	11.54	10.05	2.50	V		0.081	19.09	1	53
		QPSK	-24.79	11.51	10.05	2.50	V		0.081	19.06		
		16-QAM	-25.79	10.51	10.05	2.50	V		0.064	18.06		
		64-QAM	-27.21	9.09	10.05	2.50	V		0.046	16.64		
		256-QAM	-29.44	6.86	10.05	2.50	V		0.028	14.41		
2670.000	PI/2 BPSK	-24.61	12.51	10.10	2.58	H	0.101	20.03	1	1		
	QPSK	-24.64	12.48	10.10	2.58	H	0.100	20.00				
	16-QAM	-25.71	11.41	10.10	2.58	H	0.078	18.93				
	64-QAM	-27.20	9.92	10.10	2.58	H	0.055	17.44				
	256-QAM	-29.19	7.93	10.10	2.58	H	0.035	15.45				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2521.020	Sub6 41/ 50 MHz [30 kHz]	PI/2 BPSK	-22.51	14.16	10.00	2.53	V	< 2.00	0.146	21.63	1	1
		QPSK	-22.54	14.13	10.00	2.53	V		0.145	21.60		
		16-QAM	-23.61	13.06	10.00	2.53	V		0.113	20.53		
		64-QAM	-25.13	11.54	10.00	2.53	V		0.080	19.01		
		256-QAM	-27.10	9.57	10.00	2.53	V		0.051	17.04		
2592.990		PI/2 BPSK	-24.61	11.69	10.05	2.50	V		0.084	19.24	1	66
		QPSK	-24.67	11.63	10.05	2.50	V		0.083	19.18		
		16-QAM	-25.71	10.59	10.05	2.50	V		0.065	18.14		
		64-QAM	-27.09	9.21	10.05	2.50	V		0.047	16.76		
		256-QAM	-29.09	7.21	10.05	2.50	V		0.030	14.76		
2664.990	PI/2 BPSK	-24.66	12.43	10.10	2.60	H	0.098	19.93	1	1		
	QPSK	-24.69	12.40	10.10	2.60	H	0.098	19.90				
	16-QAM	-25.76	11.33	10.10	2.60	H	0.076	18.83				
	64-QAM	-26.97	10.12	10.10	2.60	H	0.058	17.62				
	256-QAM	-29.14	7.95	10.10	2.60	H	0.035	15.45				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2526.000	Sub6 41/ 60 MHz [30 kHz]	PI/2 BPSK	-22.35	13.91	10.30	2.53	V	< 2.00	0.147	21.68	1	1
		QPSK	-22.37	13.89	10.30	2.53	V		0.147	21.66		
		16-QAM	-23.31	12.95	10.30	2.53	V		0.118	20.72		
		64-QAM	-24.91	11.35	10.30	2.53	V		0.082	19.12		
		256-QAM	-26.90	9.36	10.30	2.53	V		0.052	17.13		
2592.990		PI/2 BPSK	-24.91	11.39	10.05	2.50	V		0.078	18.94	1	81
		QPSK	-24.96	11.34	10.05	2.50	V		0.077	18.89		
		16-QAM	-25.81	10.49	10.05	2.50	V		0.064	18.04		
		64-QAM	-27.41	8.89	10.05	2.50	V		0.044	16.44		
		256-QAM	-29.47	6.83	10.05	2.50	V		0.027	14.38		
2659.980	PI/2 BPSK	-24.39	12.46	10.10	2.61	H	0.099	19.95	1	1		
	QPSK	-24.41	12.44	10.10	2.61	H	0.098	19.93				
	16-QAM	-25.21	11.64	10.10	2.61	H	0.082	19.13				
	64-QAM	-26.91	9.94	10.10	2.61	H	0.055	17.43				
	256-QAM	-28.89	7.96	10.10	2.61	H	0.035	15.45				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2531.010	Sub6 41/ 70 MHz [30 kHz]	PI/2 BPSK	-22.46	13.66	10.30	2.52	V	< 2.00	0.139	21.44	1	1
		QPSK	-22.47	13.65	10.30	2.52	V		0.139	21.43		
		16-QAM	-23.39	12.73	10.30	2.52	V		0.112	20.51		
		64-QAM	-25.01	11.11	10.30	2.52	V		0.077	18.89		
		256-QAM	-26.96	9.16	10.30	2.52	V		0.049	16.94		
2592.990		PI/2 BPSK	-24.81	11.49	10.05	2.50	V		0.080	19.04	1	94
		QPSK	-24.96	11.34	10.05	2.50	V		0.077	18.89		
		16-QAM	-25.89	10.41	10.05	2.50	V		0.063	17.96		
		64-QAM	-27.45	8.85	10.05	2.50	V		0.044	16.40		
		256-QAM	-29.30	7.00	10.05	2.50	V		0.029	14.55		
2655.000		PI/2 BPSK	-23.86	12.90	10.10	2.63	H		0.109	20.37	1	1
		QPSK	-23.91	12.85	10.10	2.63	H		0.108	20.32		
		16-QAM	-24.81	11.95	10.10	2.63	H		0.088	19.42		
		64-QAM	-26.41	10.35	10.10	2.63	H		0.061	17.82		
		256-QAM	-28.38	8.38	10.10	2.63	H		0.039	15.85		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2536.020	Sub6 41/ 80 MHz [30 kHz]	PI/2 BPSK	-22.41	13.83	10.30	2.52	V	< 2.00	0.145	21.61	1	1
		QPSK	-22.44	13.80	10.30	2.52	V		0.144	21.58		
		16-QAM	-23.48	12.76	10.30	2.52	V		0.113	20.54		
		64-QAM	-25.07	11.17	10.30	2.52	V		0.079	18.95		
		256-QAM	-27.06	9.18	10.30	2.52	V		0.050	16.96		
2592.990		PI/2 BPSK	-24.80	11.50	10.05	2.50	V		0.080	19.05	1	108
		QPSK	-24.86	11.44	10.05	2.50	V		0.079	18.99		
		16-QAM	-25.74	10.56	10.05	2.50	V		0.065	18.11		
		64-QAM	-27.41	8.89	10.05	2.50	V		0.044	16.44		
		256-QAM	-29.43	6.87	10.05	2.50	V		0.028	14.42		
2649.990	PI/2 BPSK	-23.91	12.76	10.10	2.65	H	0.105	20.21	1	1		
	QPSK	-23.93	12.74	10.10	2.65	H	0.105	20.19				
	16-QAM	-24.95	11.72	10.10	2.65	H	0.083	19.17				
	64-QAM	-26.34	10.33	10.10	2.65	H	0.060	17.78				
	256-QAM	-28.36	8.31	10.10	2.65	H	0.038	15.76				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2541.000	Sub6 41/ 90 MHz [30 kHz]	PI/2 BPSK	-22.51	13.85	10.30	2.52	V	< 2.00	0.146	21.63	1	1
		QPSK	-22.58	13.78	10.30	2.52	V		0.143	21.56		
		16-QAM	-23.64	12.72	10.30	2.52	V		0.112	20.50		
		64-QAM	-24.94	11.42	10.30	2.52	V		0.083	19.20		
		256-QAM	-27.11	9.25	10.30	2.52	V		0.050	17.03		
2592.990		PI/2 BPSK	-24.56	11.74	10.05	2.50	V		0.085	19.29	1	1
		QPSK	-24.61	11.69	10.05	2.50	V		0.084	19.24		
		16-QAM	-25.68	10.62	10.05	2.50	V		0.066	18.17		
		64-QAM	-27.14	9.16	10.05	2.50	V		0.047	16.71		
		256-QAM	-29.15	7.15	10.05	2.50	V		0.030	14.70		
2644.980	PI/2 BPSK	-24.10	12.71	10.00	2.66	H	0.101	20.05	1	1		
	QPSK	-24.11	12.70	10.00	2.66	H	0.101	20.04				
	16-QAM	-25.05	11.76	10.00	2.66	H	0.081	19.10				
	64-QAM	-26.69	10.12	10.00	2.66	H	0.056	17.46				
	256-QAM	-28.69	8.12	10.00	2.66	H	0.035	15.46				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W dBm	Size	Offset
2546.010	Sub6 41/ 100 MHz [30 kHz]	PI/2 BPSK	-22.69	13.68	10.25	2.54	V	< 2.00	0.138	21.39	1	1
		QPSK	-22.79	13.58	10.25	2.54	V		0.135	21.29		
		16-QAM	-23.71	12.66	10.25	2.54	V		0.109	20.37		
		64-QAM	-25.23	11.14	10.25	2.54	V		0.077	18.85		
		256-QAM	-27.26	9.11	10.25	2.54	V		0.048	16.82		
2592.990		PI/2 BPSK	-24.37	11.93	10.05	2.50	V		0.089	19.48	1	1
		QPSK	-24.46	11.84	10.05	2.50	V		0.087	19.39		
		16-QAM	-25.35	10.95	10.05	2.50	V		0.071	18.50		
		64-QAM	-26.94	9.36	10.05	2.50	V		0.049	16.91		
		256-QAM	-28.89	7.41	10.05	2.50	V		0.031	14.96		
2640.000	PI/2 BPSK	-24.54	12.41	9.90	2.67	H	0.092	19.64	1	1		
	QPSK	-24.55	12.40	9.90	2.67	H	0.092	19.63				
	16-QAM	-25.61	11.34	9.90	2.67	H	0.072	18.57				
	64-QAM	-27.00	9.95	9.90	2.67	H	0.052	17.18				
	256-QAM	-29.04	7.91	9.90	2.67	H	0.033	15.14				

8.2 RADIATED SPURIOUS EMISSIONS

- NR Band: N41
- Bandwidth: 10 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
500202 (2501.010)	5 002.02	-53.57	10.70	-54.92	3.63	H	-47.85	-25.00	1	1
	7 503.03	-59.35	11.10	-52.34	4.50	H	-45.74	-25.00		
	10 004.04	-48.94	11.20	-40.48	5.26	V	-34.54	-25.00		
	12 505.05	-63.28	12.10	-53.94	6.04	V	-47.88	-25.00		
	15 006.06	-55.35	13.80	-48.75	6.65	V	-41.60	-25.00		
518598 (2592.990)	5 185.98	-55.92	11.00	-57.42	3.70	H	-50.12	-25.00	1	1
	7 778.97	-60.58	10.90	-53.20	4.61	V	-46.91	-25.00		
	10 371.96	-53.81	11.20	-43.11	5.41	V	-37.32	-25.00		
	12 964.95	-61.21	12.00	-51.28	6.11	H	-45.39	-25.00		
	15 557.94	-58.94	15.40	-53.61	6.77	H	-44.98	-25.00		
537000 (2685.000)	5 370.00	-56.94	11.50	-59.46	3.74	V	-51.70	-25.00	1	12
	8 055.00	-58.43	10.90	-51.22	4.71	H	-45.03	-25.00		
	10 740.00	-51.19	11.10	-40.59	5.50	V	-34.99	-25.00		
	13 425.00	-61.47	11.80	-50.62	6.22	V	-45.04	-25.00		
	16 110.00	-64.28	15.70	-55.14	6.91	V	-46.35	-25.00		

- NR Band: N41
- Bandwidth: 15 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
500700 (2503.500)	5 007.00	-55.31	10.70	-56.59	3.61	V	-49.50	-25.00	1	1
	7 510.50	-59.42	11.10	-52.35	4.50	V	-45.75	-25.00		
	10 014.00	-50.49	11.20	-41.88	5.27	V	-35.95	-25.00		
	12 517.50	-63.90	12.10	-54.27	6.04	V	-48.21	-25.00		
	15 021.00	-59.44	13.80	-52.96	6.65	V	-45.81	-25.00		
518598 (2592.990)	5 185.98	-58.47	11.00	-59.97	3.70	V	-52.67	-25.00	1	19
	7 778.97	-58.52	10.90	-51.14	4.61	V	-44.85	-25.00		
	10 371.96	-56.49	11.20	-45.79	5.41	V	-40.00	-25.00		
	12 964.95	-63.60	12.00	-53.67	6.11	V	-47.78	-25.00		
	15 557.94	-62.83	15.40	-57.50	6.77	V	-48.87	-25.00		
536496 (2682.480)	5 364.96	-61.96	11.50	-64.25	3.75	V	-56.50	-25.00	1	19
	8 047.44	-56.80	10.85	-49.62	4.69	V	-43.46	-25.00		
	10 729.92	-49.23	11.10	-38.00	5.47	V	-32.37	-25.00		
	13 412.40	-61.81	11.80	-51.14	6.21	V	-45.55	-25.00		
	16 094.88	-65.07	15.60	-55.61	6.91	V	-46.92	-25.00		

- NR Band: N41
- Bandwidth: 20 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
501204 (2506.020)	5 012.04	-56.31	10.70	-57.52	3.59	V	-50.41	-25.00	1	1
	7 518.06	-59.31	11.10	-52.20	4.51	V	-45.61	-25.00		
	10 024.08	-52.53	11.20	-43.71	5.27	V	-37.78	-25.00		
	12 530.10	-63.64	12.10	-53.82	6.01	V	-47.73	-25.00		
	15 036.12	-59.27	13.80	-53.03	6.65	V	-45.88	-25.00		
518598 (2592.990)	5 185.98	-57.82	11.00	-59.32	3.70	V	-52.02	-25.00	1	25
	7 778.97	-61.70	10.90	-54.32	4.61	V	-48.03	-25.00		
	10 371.96	-55.33	11.20	-44.63	5.41	V	-38.84	-25.00		
	12 964.95	-62.58	12.00	-52.65	6.11	V	-46.76	-25.00		
	15 557.94	-61.15	15.40	-55.82	6.77	V	-47.19	-25.00		
535998 (2679.990)	5 359.98	-56.97	11.50	-59.03	3.76	V	-51.29	-25.00	1	1
	8 039.97	-56.83	10.80	-49.66	4.68	V	-43.54	-25.00		
	10 719.96	-50.26	11.10	-38.63	5.46	V	-32.99	-25.00		
	13 399.95	-62.86	11.80	-52.51	6.22	V	-46.93	-25.00		
	16 079.94	-64.98	15.50	-55.70	6.90	V	-47.10	-25.00		

- NR Band: N41
- Bandwidth: 30 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
502200 (2511.000)	5 022.00	-56.95	10.70	-58.48	3.55	V	-51.33	-25.00	1	1
	7 533.00	-59.14	11.10	-51.66	4.50	V	-45.06	-25.00		
	10 044.00	-50.59	11.15	-41.74	5.27	V	-35.86	-25.00		
	12 555.00	-63.24	12.10	-53.93	6.00	V	-47.83	-25.00		
	15 066.00	-58.59	14.00	-52.98	6.65	V	-45.63	-25.00		
518598 (2592.990)	5 185.98	-58.81	11.00	-60.31	3.70	V	-53.01	-25.00	1	39
	7 778.97	-60.43	10.90	-53.05	4.61	V	-46.76	-25.00		
	10 371.96	-53.12	11.20	-42.42	5.41	V	-36.63	-25.00		
	12 964.95	-62.80	12.00	-52.87	6.11	V	-46.98	-25.00		
	15 557.94	-62.77	15.40	-57.44	6.77	V	-48.81	-25.00		
534996 (2674.980)	5 349.96	-57.22	11.50	-58.87	3.75	V	-51.12	-25.00	1	1
	8 024.94	-58.97	10.80	-52.26	4.62	V	-46.08	-25.00		
	10 699.92	-49.15	11.10	-37.47	5.48	V	-31.85	-25.00		
	13 374.90	-63.97	11.90	-53.91	6.23	V	-48.24	-25.00		
	16 049.88	-64.66	15.50	-55.81	6.90	V	-47.21	-25.00		

- NR Band: N41
- Bandwidth: 40 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
503202 (2516.010)	5 032.02	-55.90	10.70	-58.00	3.56	V	-50.86	-25.00	1	1
	7 548.03	-57.43	11.10	-50.09	4.50	V	-43.49	-25.00		
	10 064.04	-51.66	11.10	-42.85	5.28	V	-37.03	-25.00		
	12 580.05	-62.23	12.10	-52.60	6.06	V	-46.56	-25.00		
	15 096.06	-58.24	14.05	-52.91	6.67	V	-45.53	-25.00		
518598 (2592.990)	5 185.98	-57.95	11.00	-59.45	3.70	V	-52.15	-25.00	1	53
	7 778.97	-59.69	10.90	-52.31	4.61	V	-46.02	-25.00		
	10 371.96	-54.75	11.20	-44.05	5.41	V	-38.26	-25.00		
	12 964.95	-61.74	12.00	-51.81	6.11	V	-45.92	-25.00		
	15 557.94	-62.09	15.40	-56.76	6.77	V	-48.13	-25.00		
534000 (2670.000)	5 340.00	-56.40	11.40	-58.10	3.75	V	-50.45	-25.00	1	1
	8 010.00	-58.67	10.80	-51.60	4.62	V	-45.42	-25.00		
	10 680.00	-47.01	11.10	-35.55	5.46	V	-29.91	-25.00		
	13 350.00	-62.77	11.90	-52.72	6.21	V	-47.03	-25.00		
	16 020.00	-64.60	15.20	-56.25	6.68	V	-47.73	-25.00		

- NR Band: N41
- Bandwidth: 50 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
504204 (2521.020)	5 042.04	-55.43	10.70	-57.40	3.60	V	-50.30	-25.00	1	1
	7 563.06	-57.86	11.10	-51.04	4.52	V	-44.46	-25.00		
	10 084.08	-52.13	11.10	-42.91	5.30	V	-37.11	-25.00		
	12 605.10	-61.09	12.00	-51.59	6.05	V	-45.64	-25.00		
	15 126.12	-59.15	14.10	-53.19	6.67	V	-45.76	-25.00		
518598 (2592.990)	5 185.98	-60.20	11.00	-61.70	3.70	V	-54.40	-25.00	1	66
	7 778.97	-58.32	10.90	-50.94	4.61	V	-44.65	-25.00		
	10 371.96	-55.18	11.20	-44.48	5.41	V	-38.69	-25.00		
	12 964.95	-62.40	12.00	-52.47	6.11	V	-46.58	-25.00		
	15 557.94	-61.01	15.40	-55.68	6.77	V	-47.05	-25.00		
532998 (2664.990)	5 329.98	-55.03	11.40	-57.00	3.71	V	-49.31	-25.00	1	1
	7 994.97	-56.07	10.75	-48.66	4.66	V	-42.57	-25.00		
	10 659.96	-47.19	11.10	-35.03	5.49	V	-29.42	-25.00		
	13 324.95	-60.58	12.00	-49.87	6.19	V	-44.06	-25.00		
	15 989.94	-63.33	15.10	-55.51	6.88	V	-47.29	-25.00		

- NR Band: N41
- Bandwidth: 60 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
505200 (2526.000)	5 052.00	-54.81	10.70	-56.46	3.63	V	-49.39	-25.00	1	1
	7 578.00	-58.35	11.10	-51.56	4.54	V	-45.00	-25.00		
	10 104.00	-47.71	11.10	-38.87	5.29	V	-33.06	-25.00		
	12 630.00	-61.42	12.00	-52.19	6.02	V	-46.21	-25.00		
	15 156.00	-56.88	14.20	-51.39	6.67	V	-43.86	-25.00		
518598 (2592.990)	5 185.98	-57.19	11.00	-58.69	3.70	V	-51.39	-25.00	1	81
	7 778.97	-57.39	10.90	-50.01	4.61	V	-43.72	-25.00		
	10 371.96	-52.43	11.20	-41.73	5.41	V	-35.94	-25.00		
	12 964.95	-61.03	12.00	-51.10	6.11	V	-45.21	-25.00		
	15 557.94	-58.57	15.40	-53.24	6.77	V	-44.61	-25.00		
531996 (2659.980)	5 319.96	-53.53	11.40	-56.27	3.66	V	-48.53	-25.00	1	1
	7 979.94	-57.83	10.70	-50.58	4.67	V	-44.55	-25.00		
	10 639.92	-50.52	11.20	-39.09	5.49	V	-33.38	-25.00		
	13 299.90	-61.92	12.00	-51.77	6.19	V	-45.96	-25.00		
	15 959.88	-63.08	15.10	-54.42	6.87	V	-46.19	-25.00		

- NR Band: N41
- Bandwidth: 70 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
506202 (2531.010)	5 062.02	-54.69	10.70	-55.67	3.65	V	-48.62	-25.00	1	1
	7 593.03	-57.94	11.15	-50.90	4.53	V	-44.28	-25.00		
	10 124.04	-50.17	11.10	-41.29	5.30	V	-35.49	-25.00		
	12 655.05	-62.60	11.90	-53.09	6.03	V	-47.22	-25.00		
	15 186.06	-59.03	14.20	-53.78	6.67	V	-46.25	-25.00		
518598 (2592.990)	5 185.98	-57.53	11.00	-59.03	3.70	V	-51.73	-25.00	1	94
	7 778.97	-57.18	10.90	-49.80	4.61	V	-43.51	-25.00		
	10 371.96	-54.82	11.20	-44.12	5.41	V	-38.33	-25.00		
	12 964.95	-60.07	12.00	-50.14	6.11	V	-44.25	-25.00		
	15 557.94	-61.67	15.40	-56.34	6.77	V	-47.71	-25.00		
531000 (2655.000)	5 310.00	-55.90	11.40	-58.14	3.65	V	-50.39	-25.00	1	1
	7 965.00	-58.06	10.70	-50.89	4.65	V	-44.84	-25.00		
	10 620.00	-49.83	11.20	-39.14	5.41	V	-33.35	-25.00		
	13 275.00	-63.40	12.10	-53.07	6.22	V	-47.19	-25.00		
	15 930.00	-63.42	15.00	-55.15	6.88	V	-47.03	-25.00		

- NR Band: N41
- Bandwidth: 80 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
507204 (2536.020)	5 072.04	-54.83	10.70	-56.11	3.62	V	-49.03	-25.00	1	1
	7 608.06	-58.74	11.20	-51.73	4.52	V	-45.05	-25.00		
	10 144.08	-47.81	11.05	-38.34	5.32	V	-32.61	-25.00		
	12 680.10	-60.07	11.90	-49.86	6.06	V	-44.02	-25.00		
	15 216.12	-58.10	14.40	-53.14	6.69	V	-45.43	-25.00		
518598 (2592.990)	5 185.98	-57.38	11.00	-58.88	3.70	V	-51.58	-25.00	1	108
	7 778.97	-58.24	10.90	-50.86	4.61	V	-44.57	-25.00		
	10 371.96	-53.29	11.20	-42.59	5.41	V	-36.80	-25.00		
	12 964.95	-62.30	12.00	-52.37	6.11	V	-46.48	-25.00		
	15 557.94	-61.98	15.40	-56.65	6.77	V	-48.02	-25.00		
529998 (2649.990)	5 299.98	-54.49	11.40	-56.60	3.69	V	-48.89	-25.00	1	1
	7 949.97	-58.64	10.70	-51.33	4.64	V	-45.27	-25.00		
	10 599.96	-53.35	11.20	-42.16	5.41	V	-36.37	-25.00		
	13 249.95	-62.86	12.10	-52.80	6.18	V	-46.88	-25.00		
	15 899.94	-62.71	15.00	-54.88	6.87	V	-46.75	-25.00		

- NR Band: N41
- Bandwidth: 90 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
508200 (2541.000)	5 082.00	-54.35	10.70	-55.99	3.61	V	-48.90	-25.00	1	1
	7 623.00	-58.89	11.20	-52.49	4.52	V	-45.81	-25.00		
	10 164.00	-50.66	11.00	-41.58	5.33	V	-35.91	-25.00		
	12 705.00	-60.87	11.90	-50.35	6.06	V	-44.51	-25.00		
	15 246.00	-59.55	14.50	-53.67	6.73	V	-45.90	-25.00		
518598 (2592.990)	5 185.98	-55.65	11.00	-57.15	3.70	V	-49.85	-25.00	1	1
	7 778.97	-60.99	10.90	-53.61	4.61	V	-47.32	-25.00		
	10 371.96	-54.26	11.20	-43.56	5.41	V	-37.77	-25.00		
	12 964.95	-62.53	12.00	-52.60	6.11	V	-46.71	-25.00		
	15 557.94	-61.84	15.40	-56.51	6.77	V	-47.88	-25.00		
528996 (2644.980)	5 289.96	-57.48	11.30	-58.95	3.73	V	-51.38	-25.00	1	1
	7 934.94	-60.74	10.70	-53.39	4.64	V	-47.33	-25.00		
	10 579.92	-54.57	11.20	-44.12	5.46	V	-38.38	-25.00		
	13 224.90	-63.51	12.10	-53.48	6.16	V	-47.54	-25.00		
	15 869.88	-63.62	14.90	-56.87	6.85	V	-48.82	-25.00		

- NR Band: N41
- Bandwidth: 100 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
509202 (2546.010)	5 092.02	-54.26	10.70	-56.41	3.64	V	-49.35	-25.00	1	1
	7 638.03	-55.92	11.20	-49.53	4.53	V	-42.86	-25.00		
	10 184.04	-50.65	11.00	-41.19	5.33	V	-35.52	-25.00		
	12 730.05	-60.38	11.90	-49.93	6.02	V	-44.05	-25.00		
	15 276.06	-57.41	14.60	-51.54	6.71	V	-43.65	-25.00		
518598 (2592.990)	5 185.98	-53.72	11.00	-55.22	3.70	V	-47.92	-25.00	1	1
	7 778.97	-62.80	10.90	-55.42	4.61	V	-49.13	-25.00		
	10 371.96	-53.06	11.20	-42.36	5.41	V	-36.57	-25.00		
	12 964.95	-62.84	12.00	-52.91	6.11	V	-47.02	-25.00		
	15 557.94	-62.11	15.40	-56.78	6.77	V	-48.15	-25.00		
528000 (2640.000)	5 280.00	-57.84	11.30	-59.75	3.75	V	-52.20	-25.00	1	1
	7 920.00	-60.91	10.70	-53.73	4.63	V	-47.66	-25.00		
	10 560.00	-56.87	11.20	-46.96	5.45	V	-41.21	-25.00		
	13 200.00	-62.45	12.10	-52.01	6.19	V	-46.10	-25.00		
	15 840.00	-63.61	14.90	-56.50	6.84	V	-48.44	-25.00		

- ENDC-Mode : 2A(10 MHz)-n41A(50 MHz)

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
18900 (1880.0)	3760.00	-60.94	11.64	-61.17	3.16	H	-52.69	-13.00
	5640.00	-62.98	12.00	-56.80	3.93	H	-48.73	-13.00
	7520.00	-63.51	11.54	-49.06	4.51	V	-42.03	-13.00

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Sub6 n41	10 MHz	2592.990	BPSK	24	0	4.44
			QPSK			5.60
			16-QAM			6.46
			64-QAM			6.59
			256-QAM			6.61
	15 MHz		BPSK	36		4.35
			QPSK			5.63
			16-QAM			6.39
			64-QAM			6.63
			256-QAM			6.59
	20 MHz		BPSK	50		4.41
			QPSK			5.60
			16-QAM			6.42
			64-QAM			6.61
			256-QAM			6.53
	30 MHz		BPSK	75		4.47
			QPSK			5.66
			16-QAM			6.48
			64-QAM			6.80
			256-QAM			6.66
	40 MHz		BPSK	100		4.97
			QPSK			5.67
			16-QAM			6.40
			64-QAM			6.69
			256-QAM			6.61
	50 MHz		BPSK	128		4.37
			QPSK			5.56
			16-QAM			6.41
			64-QAM			6.59
			256-QAM			6.60
	60 MHz		BPSK	162		4.53
			QPSK			5.51
			16-QAM			6.42
			64-QAM			6.59
			256-QAM			6.60
	70 MHz		BPSK	180		4.65
			QPSK			5.50
			16-QAM			6.31
			64-QAM			6.53
			256-QAM			6.63
80 MHz	BPSK	216	4.17			
	QPSK		5.47			
	16-QAM		6.24			
	64-QAM		6.48			
	256-QAM		6.50			
90 MHz	BPSK	243	4.17			
	QPSK		5.43			
	16-QAM		6.30			
	64-QAM		6.46			
	256-QAM		6.51			
100 MHz	BPSK	270	4.54			
	QPSK		5.39			
	16-QAM		6.26			
	64-QAM		6.45			
	256-QAM		6.53			

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 122 ~ 176.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Sub6 n41	10 MHz	2592.990	BPSK	24	0	8.7071
			QPSK			8.7373
			16-QAM			8.7015
			64-QAM			8.7435
			256-QAM			8.7542
	15 MHz		BPSK	36		12.985
			QPSK			12.978
			16-QAM			13.053
			64-QAM			12.974
			256-QAM			12.985
	20 MHz		BPSK	50		17.996
			QPSK			17.971
			16-QAM			17.961
			64-QAM			17.973
			256-QAM			17.974
	30 MHz		BPSK	75		26.966
			QPSK			26.964
			16-QAM			26.971
			64-QAM			26.984
			256-QAM			27.003
	40 MHz		BPSK	100		35.952
			QPSK			36.083
			16-QAM			35.862
			64-QAM			35.928
			256-QAM			35.880
	50 MHz		BPSK	128		45.935
			QPSK			45.981
			16-QAM			45.908
			64-QAM			45.841
			256-QAM			46.015
	60 MHz		BPSK	162		58.260
			QPSK			58.098
			16-QAM			58.063
			64-QAM			57.977
			256-QAM			58.201
	70 MHz		BPSK	180		64.849
			QPSK			64.818
			16-QAM			64.587
			64-QAM			64.737
			256-QAM			64.690
80 MHz	BPSK	216	77.434			
	QPSK		77.422			
	16-QAM		77.381			
	64-QAM		77.580			
	256-QAM		77.353			
90 MHz	BPSK	243	87.080			
	QPSK		87.004			
	16-QAM		87.121			
	64-QAM		87.162			
	256-QAM		86.863			
100 MHz	BPSK	270	96.634			
	QPSK		96.724			
	16-QAM		96.975			
	64-QAM		96.658			
	256-QAM		97.001			

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 67 ~ 121.


8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n41	10	2501.010	8.8126	36.805	-69.750	-32.945	-25.00
		2592.990	4.0674	36.190	-71.204	-35.014	
		2685.000	9.7024	36.805	-70.319	-33.514	
	15	2503.500	3.9956	36.190	-70.679	-34.489	
		2592.990	5.2039	36.805	-70.395	-33.590	
		2682.480	10.7047	37.330	-68.720	-31.390	
	20	2506.020	9.6939	36.805	-70.084	-33.279	
		2592.990	4.0639	36.190	-70.054	-33.864	
		2679.990	9.9292	36.805	-70.149	-33.344	
	30	2511.000	4.5479	36.190	-70.222	-34.032	
		2592.990	10.3175	37.330	-69.507	-32.177	
		2674.980	10.6456	37.330	-67.838	-30.508	
	40	2516.010	5.1970	36.805	-70.452	-33.647	
		2592.990	10.2975	37.330	-68.712	-31.382	
		2670.000	5.1406	36.805	-71.250	-34.445	
	50	2521.020	8.0554	36.805	-71.471	-34.666	
		2592.990	10.2780	37.330	-69.452	-32.122	
		2664.990	10.5665	37.330	-67.935	-30.605	
	60	2526.000	9.7652	36.805	-71.705	-34.900	
		2592.990	10.2571	37.330	-68.878	-31.548	
		2659.980	10.5253	37.330	-69.242	-31.912	
	70	2531.010	8.0414	36.805	-69.448	-32.643	
		2592.990	10.2380	37.330	-69.316	-31.986	
		2655.000	4.0075	36.190	-70.592	-34.402	
	80	2536.020	9.7064	36.805	-71.415	-34.610	
		2592.990	10.2176	37.330	-68.762	-31.432	
		2649.990	4.8959	36.190	-71.000	-34.810	
	90	2541.000	9.7109	36.805	-70.252	-33.447	
		2592.990	10.1976	37.330	-68.819	-31.489	
		2644.980	9.9267	36.805	-69.957	-33.152	
100	2546.010	7.9950	36.805	-70.063	-33.258		
	2592.990	4.0320	36.190	-70.112	-33.922		
	2640.000	8.7956	36.805	-70.448	-33.643		

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 254 ~ 319.
2. Duty Cycle factor already applied on the factor.

- Duty Cycle Factor(dB) = 6.99

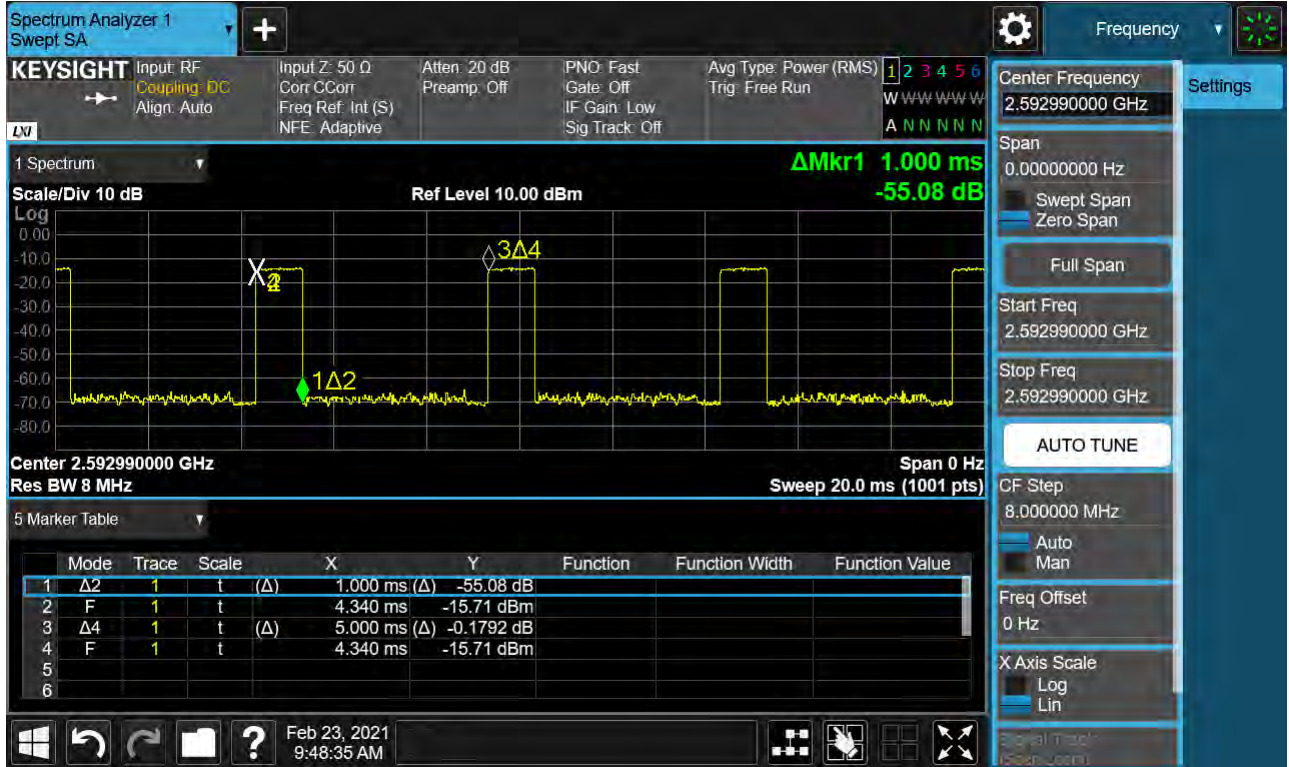

- Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter

- Result(dBm) = Reading + Factor

3. Factor(dB)

Frequency Range (GHz)	Factor [dB]
0.03 – 1	33.484
1 – 5	36.190
5 – 10	36.805
10 – 15	37.330
15 – 20	37.703
Above 20	38.345

8.6 CHANNEL EDGE

BW (MHz)	Frequency (MHz)	Mod	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Upper
10	2501.010	BPSK	Full RB	-24.08	-22.91	-26.30	-25.68	-30.25	-26.43	-35.14
15	2503.500	BPSK	Full RB	-24.62	-28.89	-26.99	-26.38	-27.03	-25.48	-37.45
20	2506.020	BPSK	Full RB	-24.68	-26.73	-27.54	-27.81	-28.26	-27.61	-38.83
30	2511.000	BPSK	Full RB	-26.19	-28.92	-28.39	-29.43	-30.65	-29.82	-39.18
40	2520.000	BPSK	Full RB	-24.55	-32.15	-28.43	-32.49	-33.47	-31.34	-43.70
50	2525.010	BPSK	Full RB	-23.52	-31.09	-27.84	-32.67	-31.85	-32.28	-40.37
60	2530.020	BPSK	Full RB	-18.70	-19.36	-26.05	-27.60	-31.19	-32.62	-39.25
70	2531.010	BPSK	Full RB	-21.51	-32.37	-26.88	-34.33	-31.28	-34.58	-43.54
80	2540.010	BPSK	Full RB	-21.87	-23.90	-26.67	-28.75	-29.57	-31.46	-44.21
90	2545.020	BPSK	Full RB	-21.29	-25.75	-27.17	-29.27	-31.08	-34.28	-46.32
100	2550.000	BPSK	Full RB	-21.70	-27.58	-27.36	-30.05	-30.81	-32.25	-46.86
Limit				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1 MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
10 MHz	2592.990	BPSK	Full RB	0	-21.60	-21.89	-22.81	-23.48
	2685.000	BPSK	Full RB	0	-20.74	-21.90	-21.35	-21.10
15 MHz	2592.990	BPSK	Full RB	0	-20.85	-27.76	-24.55	-25.36
	2682.480	BPSK	Full RB	0	-17.96	-26.25	-23.41	-23.47
20 MHz	2592.990	BPSK	Full RB	0	-22.99	-26.15	-25.87	-27.15
	2679.990	BPSK	Full RB	0	-21.21	-24.42	-22.09	-23.40
30 MHz	2592.990	BPSK	Full RB	0	-23.47	-28.63	-25.71	-30.11
	2679.990	BPSK	Full RB	0	-21.66	-26.60	-23.20	-26.71
40 MHz	2592.990	BPSK	Full RB	0	-22.75	-30.33	-27.22	-31.06
	2670.000	BPSK	Full RB	0	-21.42	-27.52	-22.89	-28.83
50 MHz	2592.990	BPSK	Full RB	0	-21.03	-28.56	-26.05	-30.86
	2664.990	BPSK	Full RB	0	-20.37	-27.07	-23.44	-28.81
60 MHz	2592.990	BPSK	Full RB	0	-18.34	-18.51	-25.32	-25.24
	2659.980	BPSK	Full RB	0	-16.84	-18.67	-22.43	-25.12
70 MHz	2592.990	BPSK	Full RB	0	-22.52	-32.08	-26.32	-33.74
	2655.000	BPSK	Full RB	0	-18.86	-29.64	-22.87	-31.57
80 MHz	2592.990	BPSK	Full RB	0	-21.86	-24.43	-26.24	-28.53
	2649.990	BPSK	Full RB	0	-18.90	-24.30	-23.46	-27.43
90 MHz	2592.990	BPSK	Full RB	0	-20.88	-27.33	-25.99	-30.91
	2644.980	BPSK	Full RB	0	-19.14	-26.87	-23.60	-29.84
100 MHz	2592.990	BPSK	Full RB	0	-19.50	-29.32	-26.05	-32.32
	2640.000	BPSK	Full RB	0	-18.72	-28.49	-24.45	-31.14
Limit					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
					10 MHz	2592.990	BPSK	Full RB
	2685.000	BPSK	Full RB	0	-24.65	-24.70	-35.41	-34.16
15 MHz	2592.990	BPSK	Full RB	0	-23.70	-24.17	-37.57	-36.88
	2682.480	BPSK	Full RB	0	-31.61	-33.25	-42.86	-44.72
20 MHz	2592.990	BPSK	Full RB	0	-24.82	-26.64	-37.28	-36.47
	2679.990	BPSK	Full RB	0	-22.55	-23.13	-35.31	-36.32
30 MHz	2592.990	BPSK	Full RB	0	-26.25	-29.02	-39.26	-39.59
	2679.990	BPSK	Full RB	0	-22.93	-25.86	-36.85	-40.20
40 MHz	2592.990	BPSK	Full RB	0	-27.26	-30.53	-36.80	-40.17
	2670.000	BPSK	Full RB	0	-23.31	-27.58	-39.12	-44.88
50 MHz	2592.990	BPSK	Full RB	0	-27.99	-32.99	-38.30	-39.99
	2664.990	BPSK	Full RB	0	-28.75	-41.16	-40.92	-47.10
60 MHz	2592.990	BPSK	Full RB	0	-24.92	-31.79	-39.75	-42.07
	2659.980	BPSK	Full RB	0	-22.33	-27.22	-41.15	-48.85
70 MHz	2592.990	BPSK	Full RB	0	-27.72	-33.25	-42.52	-40.51
	2655.000	BPSK	Full RB	0	-30.48	-42.64	-43.42	-48.97
80 MHz	2592.990	BPSK	Full RB	0	-25.82	-33.16	-49.03	-44.24
	2649.990	BPSK	Full RB	0	-26.02	-32.29	-39.99	-48.85
90 MHz	2592.990	BPSK	Full RB	0	-27.79	-34.60	-48.71	-46.07
	2644.980	BPSK	Full RB	0	-26.23	-32.00	-37.71	-48.78
100 MHz	2592.990	BPSK	Full RB	0	-28.26	-34.87	-48.30	-47.66
	2640.000	BPSK	Full RB	0	-26.19	-33.74	-44.53	-48.00
Limit					-13.0		-25.0	

Note:

1. C.E = Channel Edge
2. X = X is the greater of 6 MHz or the actual emission bandwidth
3. Duty Cycle factor already applied on the factor.
 - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
 - Result(dBm) = Reading + Factor
 - Duty Cycle Factor(dB) = 6.99
4. Plots of the EUT's Channel Edge are shown Page 177 ~ 253. (1RB & Full RB)

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ BandWidth: 10 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2501.010	100 %	+20(Ref)	2501 009 981	0.0	0.000 000	0.000
	100 %	-30	2501 009 963	-17.9	-0.000 001	-0.007
	100 %	-20	2501 009 962	-19.1	-0.000 001	-0.008
	100 %	-10	2501 009 961	-20.2	-0.000 001	-0.008
	100 %	0	2501 009 961	-19.5	-0.000 001	-0.008
	100 %	+10	2501 009 962	-19.2	-0.000 001	-0.008
	100 %	+30	2501 009 962	-18.8	-0.000 001	-0.008
	100 %	+40	2501 009 961	-19.7	-0.000 001	-0.008
	100 %	+50	2501 009 962	-18.7	-0.000 001	-0.007
	Batt. Endpoint	+20	2501 009 964	-17.1	-0.000 001	-0.007
2685.000	100 %	+20(Ref)	2684 999 981	0.0	0.000 000	0.000
	100 %	-30	2684 999 959	-21.8	-0.000 001	-0.008
	100 %	-20	2684 999 959	-21.5	-0.000 001	-0.008
	100 %	-10	2684 999 961	-20.1	-0.000 001	-0.007
	100 %	0	2684 999 960	-20.6	-0.000 001	-0.008
	100 %	+10	2684 999 961	-19.3	-0.000 001	-0.007
	100 %	+30	2684 999 960	-20.3	-0.000 001	-0.008
	100 %	+40	2684 999 959	-21.2	-0.000 001	-0.008
	100 %	+50	2684 999 961	-19.3	-0.000 001	-0.007
	Batt. Endpoint	+20	2684 999 961	-19.7	-0.000 001	-0.007

- ▣ BandWidth: 15 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2503.500	100 %	+20(Ref)	2503 499 981	0.0	0.000 000	0.000
	100 %	-30	2503 499 965	-16.5	-0.000 001	-0.007
	100 %	-20	2503 499 963	-18.4	-0.000 001	-0.007
	100 %	-10	2503 499 963	-18.6	-0.000 001	-0.007
	100 %	0	2503 499 964	-17.5	-0.000 001	-0.007
	100 %	+10	2503 499 962	-19.8	-0.000 001	-0.008
	100 %	+30	2503 499 963	-19.0	-0.000 001	-0.008
	100 %	+40	2503 499 965	-16.9	-0.000 001	-0.007
	100 %	+50	2503 499 963	-18.0	-0.000 001	-0.007
	Batt. Endpoint	+20	2503 499 966	-15.8	-0.000 001	-0.006
2682.480	100 %	+20(Ref)	2682 479 978	0.0	0.000 000	0.000
	100 %	-30	2682 479 957	-20.7	-0.000 001	-0.008
	100 %	-20	2682 479 957	-20.5	-0.000 001	-0.008
	100 %	-10	2682 479 957	-20.5	-0.000 001	-0.008
	100 %	0	2682 479 955	-22.7	-0.000 001	-0.008
	100 %	+10	2682 479 956	-21.7	-0.000 001	-0.008
	100 %	+30	2682 479 957	-20.4	-0.000 001	-0.008
	100 %	+40	2682 479 957	-20.7	-0.000 001	-0.008
	100 %	+50	2682 479 957	-21.0	-0.000 001	-0.008
	Batt. Endpoint	+20	2682 479 956	-21.7	-0.000 001	-0.008

- ▣ BandWidth: 20 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2506.020	100 %	+20(Ref)	2506 019 982	0.0	0.000 000	0.000
	100 %	-30	2506 019 963	-19.0	-0.000 001	-0.008
	100 %	-20	2506 019 964	-17.2	-0.000 001	-0.007
	100 %	-10	2506 019 964	-17.6	-0.000 001	-0.007
	100 %	0	2506 019 963	-18.5	-0.000 001	-0.007
	100 %	+10	2506 019 964	-17.8	-0.000 001	-0.007
	100 %	+30	2506 019 963	-18.3	-0.000 001	-0.007
	100 %	+40	2506 019 962	-19.7	-0.000 001	-0.008
	100 %	+50	2506 019 964	-18.0	-0.000 001	-0.007
	Batt. Endpoint	+20	2506 019 963	-18.4	-0.000 001	-0.007
2679.990	100 %	+20(Ref)	2679 989 980	0.0	0.000 000	0.000
	100 %	-30	2679 989 959	-20.5	-0.000 001	-0.008
	100 %	-20	2679 989 961	-19.1	-0.000 001	-0.007
	100 %	-10	2679 989 960	-19.5	-0.000 001	-0.007
	100 %	0	2679 989 959	-20.5	-0.000 001	-0.008
	100 %	+10	2679 989 961	-19.3	-0.000 001	-0.007
	100 %	+30	2679 989 959	-20.5	-0.000 001	-0.008
	100 %	+40	2679 989 961	-18.5	-0.000 001	-0.007
	100 %	+50	2679 989 960	-20.3	-0.000 001	-0.008
	Batt. Endpoint	+20	2679 989 960	-20.1	-0.000 001	-0.007

- ▣ BandWidth: 30 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2511.000	100 %	+20(Ref)	2510 999 979	0.0	0.000 000	0.000
	100 %	-30	2510 999 963	-16.7	-0.000 001	-0.007
	100 %	-20	2510 999 963	-16.5	-0.000 001	-0.007
	100 %	-10	2510 999 960	-19.0	-0.000 001	-0.008
	100 %	0	2510 999 962	-17.6	-0.000 001	-0.007
	100 %	+10	2510 999 962	-16.9	-0.000 001	-0.007
	100 %	+30	2510 999 962	-17.7	-0.000 001	-0.007
	100 %	+40	2510 999 963	-16.0	-0.000 001	-0.006
	100 %	+50	2510 999 962	-17.2	-0.000 001	-0.007
	Batt. Endpoint	+20	2510 999 961	-18.7	-0.000 001	-0.007
2674.980	100 %	+20(Ref)	2674 979 980	0.0	0.000 000	0.000
	100 %	-30	2674 979 961	-18.5	-0.000 001	-0.007
	100 %	-20	2674 979 962	-17.7	-0.000 001	-0.007
	100 %	-10	2674 979 962	-17.9	-0.000 001	-0.007
	100 %	0	2674 979 961	-18.9	-0.000 001	-0.007
	100 %	+10	2674 979 962	-17.9	-0.000 001	-0.007
	100 %	+30	2674 979 961	-18.3	-0.000 001	-0.007
	100 %	+40	2674 979 960	-20.1	-0.000 001	-0.008
	100 %	+50	2674 979 961	-18.9	-0.000 001	-0.007
	Batt. Endpoint	+20	2674 979 962	-17.5	-0.000 001	-0.007

- ▣ BandWidth: 40 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2516.010	100 %	+20(Ref)	2516 009 983	0.0	0.000 000	0.000
	100 %	-30	2516 009 963	-20.0	-0.000 001	-0.008
	100 %	-20	2516 009 964	-18.8	-0.000 001	-0.007
	100 %	-10	2516 009 962	-20.4	-0.000 001	-0.008
	100 %	0	2516 009 962	-21.1	-0.000 001	-0.008
	100 %	+10	2516 009 962	-20.9	-0.000 001	-0.008
	100 %	+30	2516 009 964	-19.1	-0.000 001	-0.008
	100 %	+40	2516 009 963	-19.7	-0.000 001	-0.008
	100 %	+50	2516 009 962	-20.4	-0.000 001	-0.008
	Batt. Endpoint	+20	2516 009 963	-19.8	-0.000 001	-0.008
2670.000	100 %	+20(Ref)	2669 999 980	0.0	0.000 000	0.000
	100 %	-30	2669 999 960	-19.7	-0.000 001	-0.007
	100 %	-20	2669 999 962	-17.5	-0.000 001	-0.007
	100 %	-10	2669 999 960	-19.7	-0.000 001	-0.007
	100 %	0	2669 999 961	-18.5	-0.000 001	-0.007
	100 %	+10	2669 999 962	-17.9	-0.000 001	-0.007
	100 %	+30	2669 999 961	-19.2	-0.000 001	-0.007
	100 %	+40	2669 999 962	-17.8	-0.000 001	-0.007
	100 %	+50	2669 999 962	-18.0	-0.000 001	-0.007
	Batt. Endpoint	+20	2669 999 963	-17.3	-0.000 001	-0.006

- ▣ BandWidth: 50 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2521.020	100 %	+20(Ref)	2521 019 981	0.0	0.000 000	0.000
	100 %	-30	2521 019 963	-18.2	-0.000 001	-0.007
	100 %	-20	2521 019 963	-18.3	-0.000 001	-0.007
	100 %	-10	2521 019 964	-17.6	-0.000 001	-0.007
	100 %	0	2521 019 963	-18.7	-0.000 001	-0.007
	100 %	+10	2521 019 963	-18.0	-0.000 001	-0.007
	100 %	+30	2521 019 962	-19.3	-0.000 001	-0.008
	100 %	+40	2521 019 963	-18.8	-0.000 001	-0.007
	100 %	+50	2521 019 963	-18.1	-0.000 001	-0.007
	Batt. Endpoint	+20	2521 019 963	-18.3	-0.000 001	-0.007
2664.990	100 %	+20(Ref)	2664 989 984	0.0	0.000 000	0.000
	100 %	-30	2664 989 970	-14.1	-0.000 001	-0.005
	100 %	-20	2664 989 968	-16.3	-0.000 001	-0.006
	100 %	-10	2664 989 970	-14.8	-0.000 001	-0.006
	100 %	0	2664 989 968	-16.5	-0.000 001	-0.006
	100 %	+10	2664 989 971	-13.8	-0.000 001	-0.005
	100 %	+30	2664 989 969	-15.7	-0.000 001	-0.006
	100 %	+40	2664 989 967	-17.8	-0.000 001	-0.007
	100 %	+50	2664 989 970	-14.1	-0.000 001	-0.005
	Batt. Endpoint	+20	2664 989 969	-15.6	-0.000 001	-0.006

- ▣ BandWidth: 60 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2526.000	100 %	+20(Ref)	2525 999 983	0.0	0.000 000	0.000
	100 %	-30	2525 999 965	-17.6	-0.000 001	-0.007
	100 %	-20	2525 999 965	-17.3	-0.000 001	-0.007
	100 %	-10	2525 999 961	-21.0	-0.000 001	-0.008
	100 %	0	2525 999 963	-19.1	-0.000 001	-0.008
	100 %	+10	2525 999 963	-19.4	-0.000 001	-0.008
	100 %	+30	2525 999 962	-20.2	-0.000 001	-0.008
	100 %	+40	2525 999 965	-17.9	-0.000 001	-0.007
	100 %	+50	2525 999 965	-17.9	-0.000 001	-0.007
	Batt. Endpoint	+20	2525 999 964	-18.4	-0.000 001	-0.007
2659.980	100 %	+20(Ref)	2659 979 985	0.0	0.000 000	0.000
	100 %	-30	2659 979 969	-15.4	-0.000 001	-0.006
	100 %	-20	2659 979 969	-15.9	-0.000 001	-0.006
	100 %	-10	2659 979 969	-15.6	-0.000 001	-0.006
	100 %	0	2659 979 969	-15.1	-0.000 001	-0.006
	100 %	+10	2659 979 969	-15.9	-0.000 001	-0.006
	100 %	+30	2659 979 968	-16.2	-0.000 001	-0.006
	100 %	+40	2659 979 968	-17.1	-0.000 001	-0.006
	100 %	+50	2659 979 970	-14.2	-0.000 001	-0.005
	Batt. Endpoint	+20	2659 979 968	-16.8	-0.000 001	-0.006

- ▣ BandWidth: 70 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2531.010	100 %	+20(Ref)	2531 009 981	0.0	0.000 000	0.000
	100 %	-30	2531 009 962	-19.0	-0.000 001	-0.008
	100 %	-20	2531 009 963	-18.2	-0.000 001	-0.007
	100 %	-10	2531 009 963	-18.2	-0.000 001	-0.007
	100 %	0	2531 009 963	-18.3	-0.000 001	-0.007
	100 %	+10	2531 009 965	-16.3	-0.000 001	-0.006
	100 %	+30	2531 009 961	-20.0	-0.000 001	-0.008
	100 %	+40	2531 009 963	-18.6	-0.000 001	-0.007
	100 %	+50	2531 009 963	-18.4	-0.000 001	-0.007
	Batt. Endpoint	+20	2531 009 965	-16.7	-0.000 001	-0.007
2655.000	100 %	+20(Ref)	2654 999 984	0.0	0.000 000	0.000
	100 %	-30	2654 999 970	-14.1	-0.000 001	-0.005
	100 %	-20	2654 999 968	-15.5	-0.000 001	-0.006
	100 %	-10	2654 999 969	-15.2	-0.000 001	-0.006
	100 %	0	2654 999 966	-17.4	-0.000 001	-0.007
	100 %	+10	2654 999 967	-16.6	-0.000 001	-0.006
	100 %	+30	2654 999 967	-16.6	-0.000 001	-0.006
	100 %	+40	2654 999 966	-18.1	-0.000 001	-0.007
	100 %	+50	2654 999 968	-15.8	-0.000 001	-0.006
	Batt. Endpoint	+20	2654 999 967	-16.9	-0.000 001	-0.006

- ▣ BandWidth: 80 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2536.020	100 %	+20(Ref)	2536 019 981	0.0	0.000 000	0.000
	100 %	-30	2536 019 961	-19.6	-0.000 001	-0.008
	100 %	-20	2536 019 961	-19.6	-0.000 001	-0.008
	100 %	-10	2536 019 963	-17.2	-0.000 001	-0.007
	100 %	0	2536 019 963	-17.9	-0.000 001	-0.007
	100 %	+10	2536 019 964	-16.5	-0.000 001	-0.006
	100 %	+30	2536 019 963	-17.7	-0.000 001	-0.007
	100 %	+40	2536 019 963	-17.7	-0.000 001	-0.007
	100 %	+50	2536 019 962	-19.0	-0.000 001	-0.007
	Batt. Endpoint	+20	2536 019 963	-18.1	-0.000 001	-0.007
2649.990	100 %	+20(Ref)	2649 989 985	0.0	0.000 000	0.000
	100 %	-30	2649 989 970	-14.6	-0.000 001	-0.006
	100 %	-20	2649 989 970	-14.8	-0.000 001	-0.006
	100 %	-10	2649 989 970	-14.8	-0.000 001	-0.006
	100 %	0	2649 989 969	-16.3	-0.000 001	-0.006
	100 %	+10	2649 989 971	-14.3	-0.000 001	-0.005
	100 %	+30	2649 989 970	-15.4	-0.000 001	-0.006
	100 %	+40	2649 989 970	-14.8	-0.000 001	-0.006
	100 %	+50	2649 989 972	-13.0	0.000 000	-0.005
	Batt. Endpoint	+20	2649 989 971	-14.5	-0.000 001	-0.005

- ▣ BandWidth: 90 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band


Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2541.000	100 %	+20(Ref)	2540 999 982	0.0	0.000 000	0.000
	100 %	-30	2540 999 964	-18.8	-0.000 001	-0.007
	100 %	-20	2540 999 963	-19.1	-0.000 001	-0.007
	100 %	-10	2540 999 964	-18.3	-0.000 001	-0.007
	100 %	0	2540 999 964	-18.4	-0.000 001	-0.007
	100 %	+10	2540 999 963	-19.5	-0.000 001	-0.008
	100 %	+30	2540 999 963	-19.5	-0.000 001	-0.008
	100 %	+40	2540 999 964	-18.6	-0.000 001	-0.007
	100 %	+50	2540 999 962	-20.0	-0.000 001	-0.008
	Batt. Endpoint	+20	2540 999 965	-17.6	-0.000 001	-0.007
2644.980	100 %	+20(Ref)	2644 979 984	0.0	0.000 000	0.000
	100 %	-30	2644 979 969	-15.0	-0.000 001	-0.006
	100 %	-20	2644 979 968	-16.2	-0.000 001	-0.006
	100 %	-10	2644 979 968	-16.2	-0.000 001	-0.006
	100 %	0	2644 979 967	-16.3	-0.000 001	-0.006
	100 %	+10	2644 979 966	-17.8	-0.000 001	-0.007
	100 %	+30	2644 979 967	-16.5	-0.000 001	-0.006
	100 %	+40	2644 979 967	-16.6	-0.000 001	-0.006
	100 %	+50	2644 979 968	-15.7	-0.000 001	-0.006
	Batt. Endpoint	+20	2644 979 968	-15.7	-0.000 001	-0.006

- ▣ BandWidth: 100 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band


Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2546.010	100 %	+20(Ref)	2546 009 980	0.0	0.000 000	0.000
	100 %	-30	2546 009 961	-19.0	-0.000 001	-0.007
	100 %	-20	2546 009 962	-17.6	-0.000 001	-0.007
	100 %	-10	2546 009 962	-18.0	-0.000 001	-0.007
	100 %	0	2546 009 961	-18.4	-0.000 001	-0.007
	100 %	+10	2546 009 960	-19.6	-0.000 001	-0.008
	100 %	+30	2546 009 960	-19.4	-0.000 001	-0.008
	100 %	+40	2546 009 962	-17.9	-0.000 001	-0.007
	100 %	+50	2546 009 962	-17.9	-0.000 001	-0.007
	Batt. Endpoint	+20	2546 009 960	-20.0	-0.000 001	-0.008
2640.000	100 %	+20(Ref)	2639 999 983	0.0	0.000 000	0.000
	100 %	-30	2639 999 966	-16.6	-0.000 001	-0.006
	100 %	-20	2639 999 964	-18.7	-0.000 001	-0.007
	100 %	-10	2639 999 964	-18.9	-0.000 001	-0.007
	100 %	0	2639 999 967	-16.4	-0.000 001	-0.006
	100 %	+10	2639 999 964	-19.2	-0.000 001	-0.007
	100 %	+30	2639 999 964	-19.2	-0.000 001	-0.007
	100 %	+40	2639 999 962	-20.9	-0.000 001	-0.008
	100 %	+50	2639 999 965	-18.1	-0.000 001	-0.007
	Batt. Endpoint	+20	2639 999 964	-19.1	-0.000 001	-0.007

9. TEST PLOTS


Sub6 n41. Occupied Bandwidth Plot (10 MHz Ch.518598 BPSK)

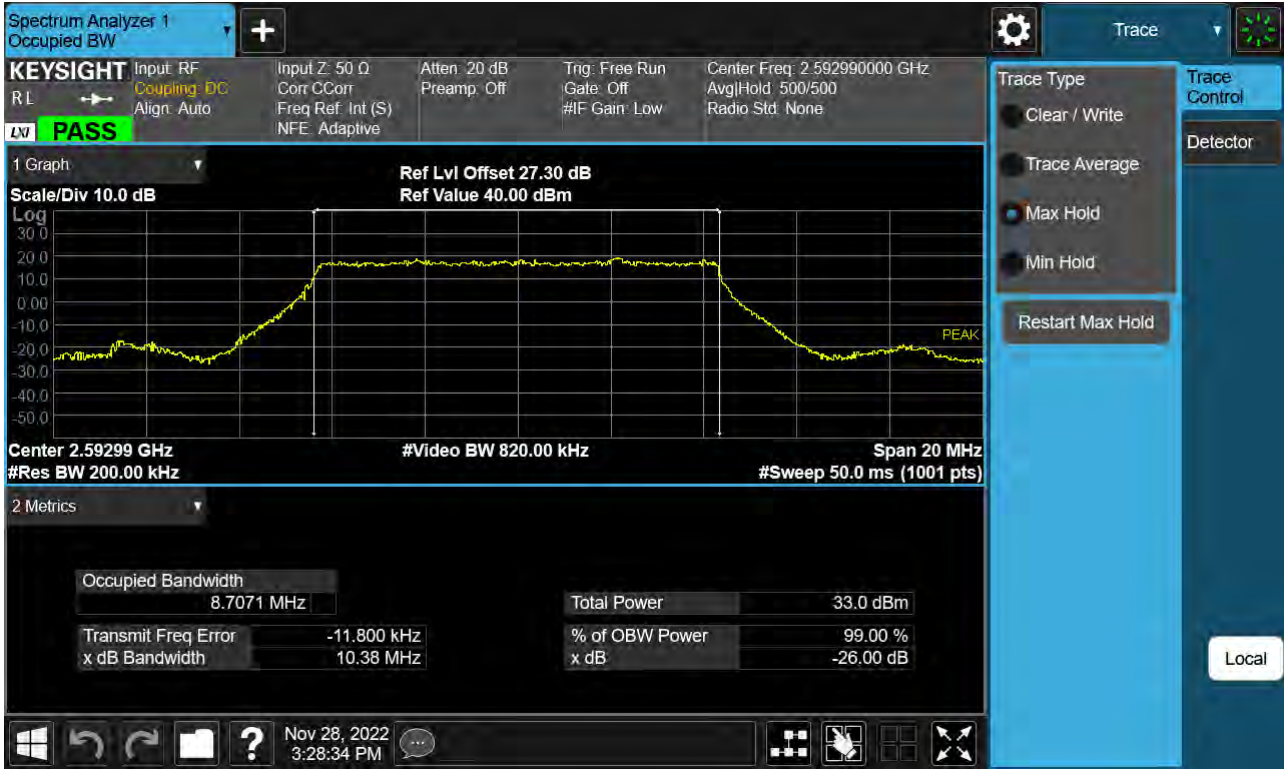

Sub6 n41. Occupied Bandwidth Plot (10 MHz Ch.518598 QPSK)

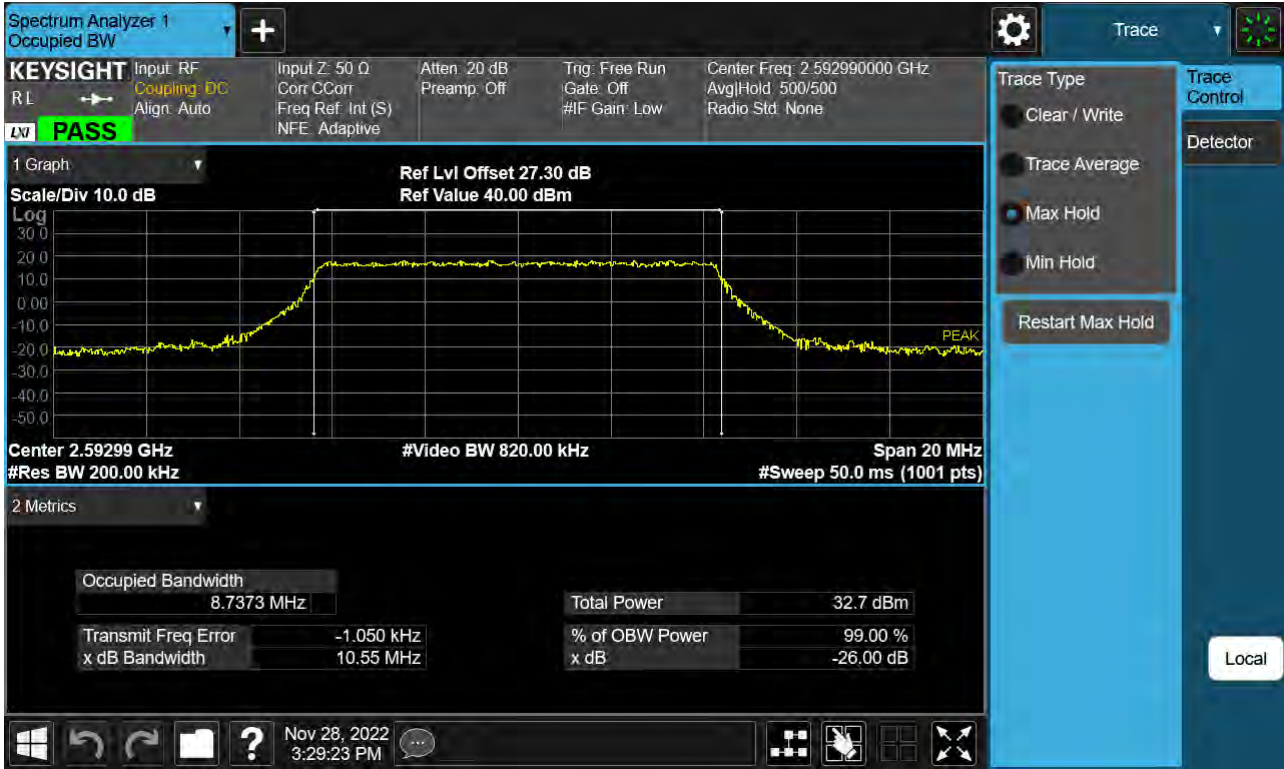


Sub6 n41. Occupied Bandwidth Plot (10 MHz Ch.518598 16-QAM)

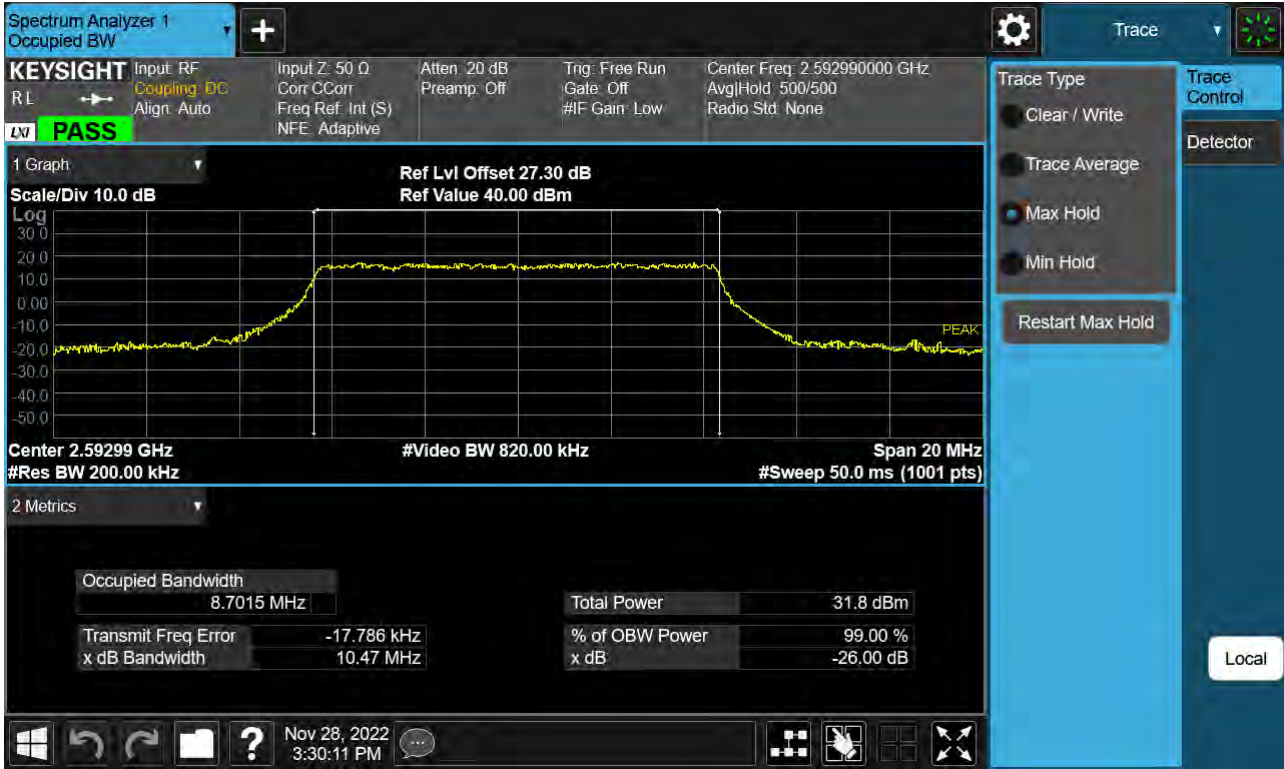


Sub6 n41. Occupied Bandwidth Plot (10 MHz Ch.518598 64-QAM)




Sub6 n41. Occupied Bandwidth Plot (10 MHz Ch.518598 256-QAM)

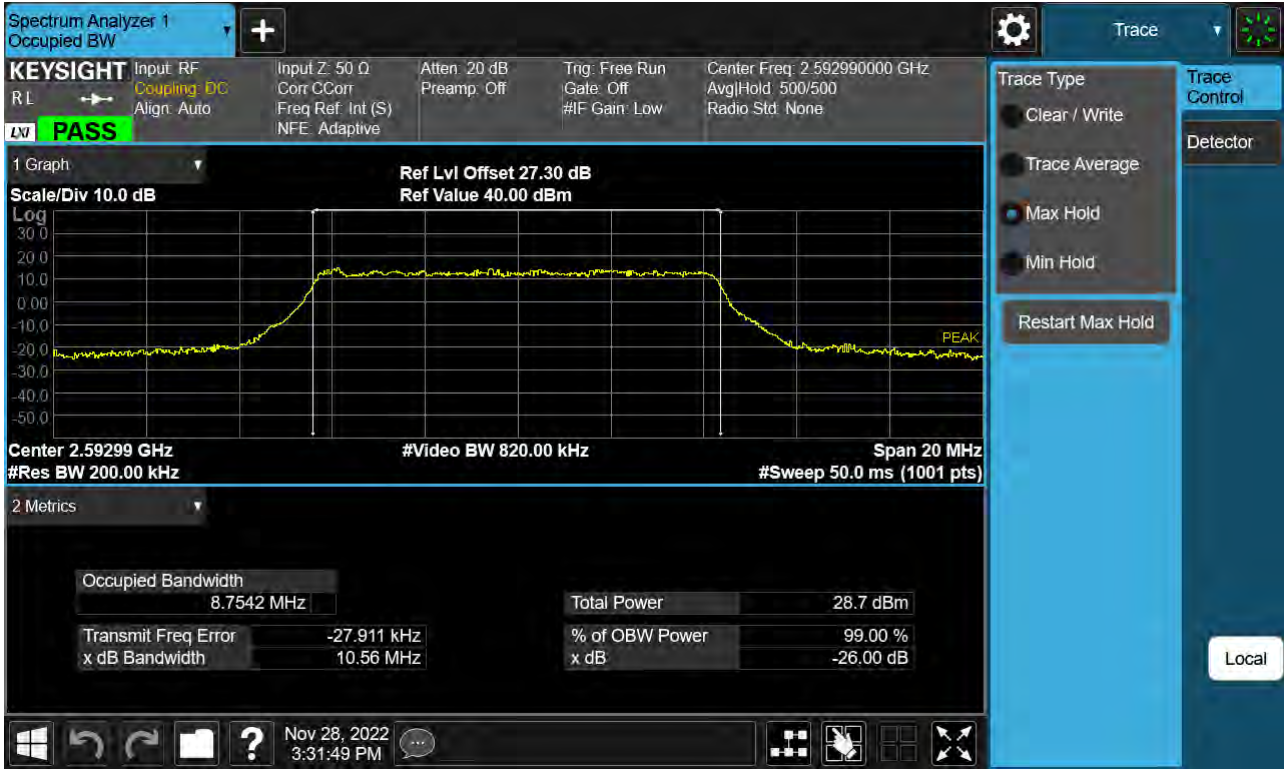


Sub6 n41. Occupied Bandwidth Plot (15 MHz Ch.518598 BPSK)

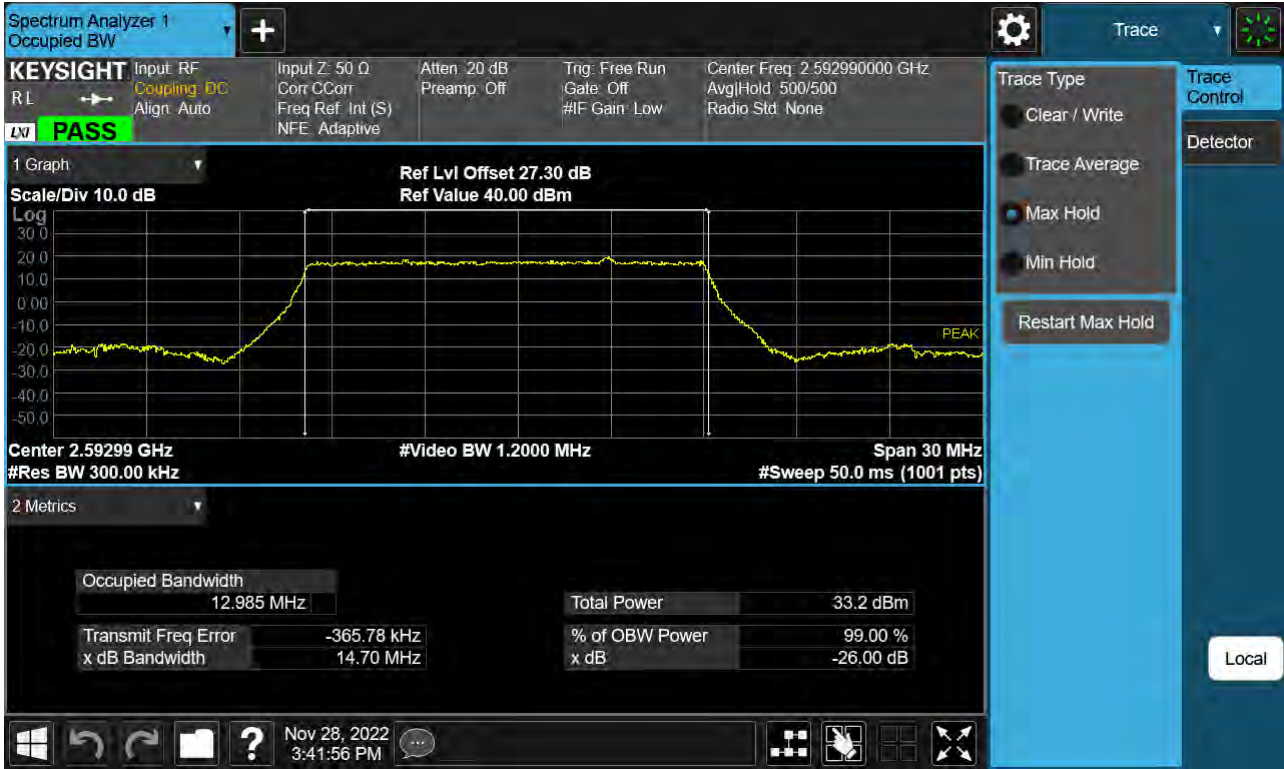


Sub6 n41. Occupied Bandwidth Plot (15 MHz Ch.518598 QPSK)

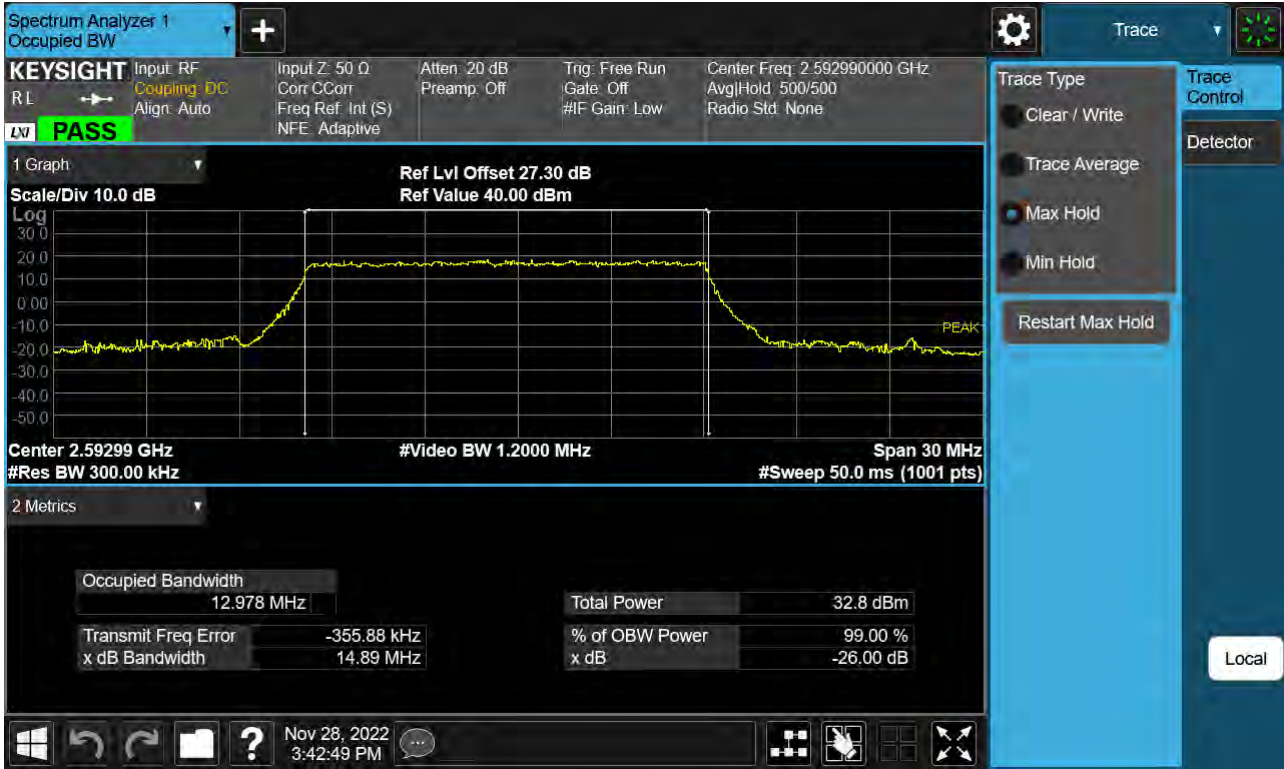


Sub6 n41. Occupied Bandwidth Plot (15 MHz Ch.518598 16-QAM)

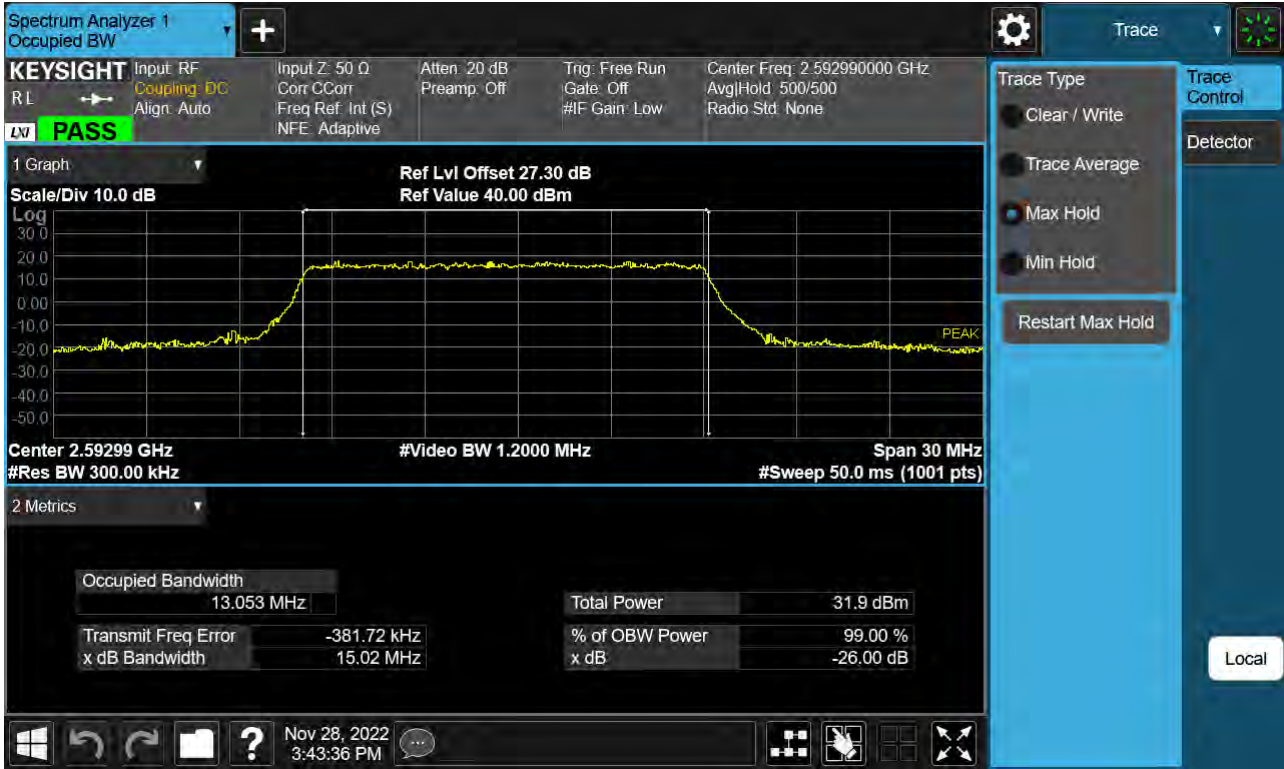


Sub6 n41. Occupied Bandwidth Plot (15 MHz Ch.518598 64-QAM)

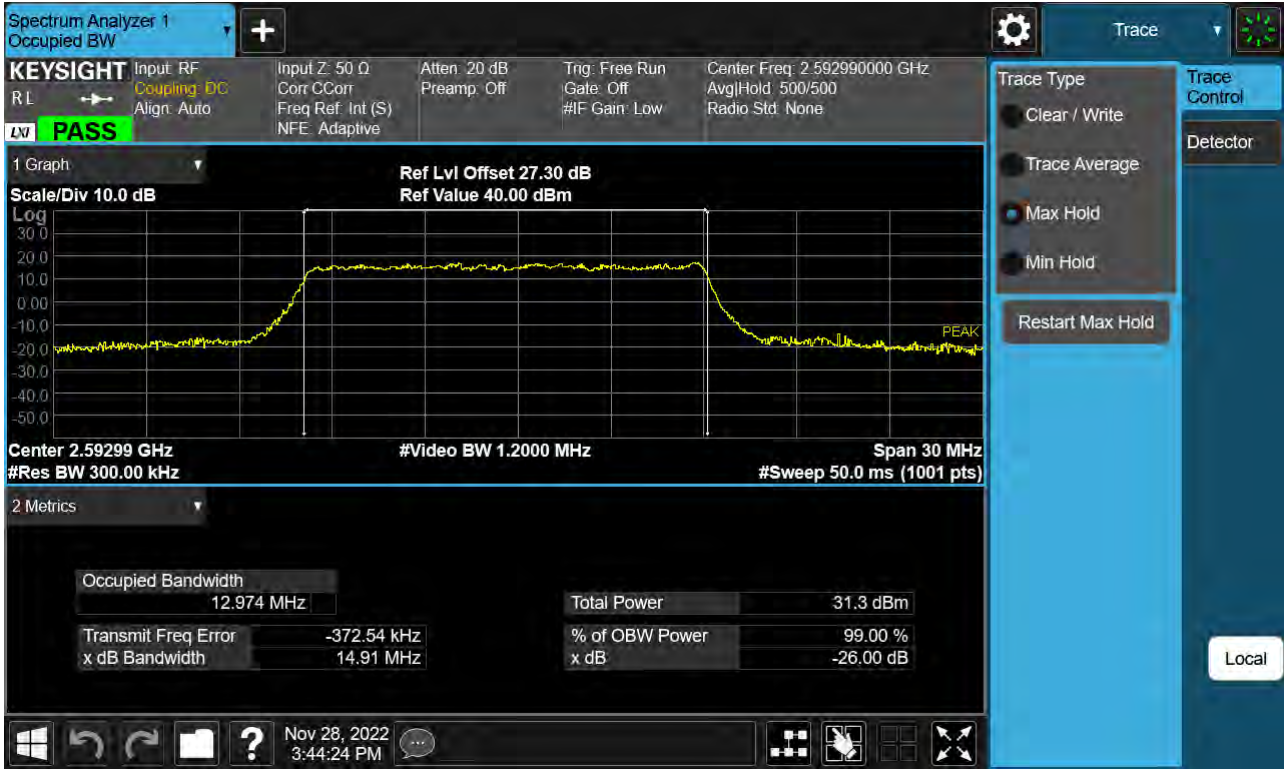


Sub6 n41. Occupied Bandwidth Plot (15 MHz Ch.518598 256-QAM)

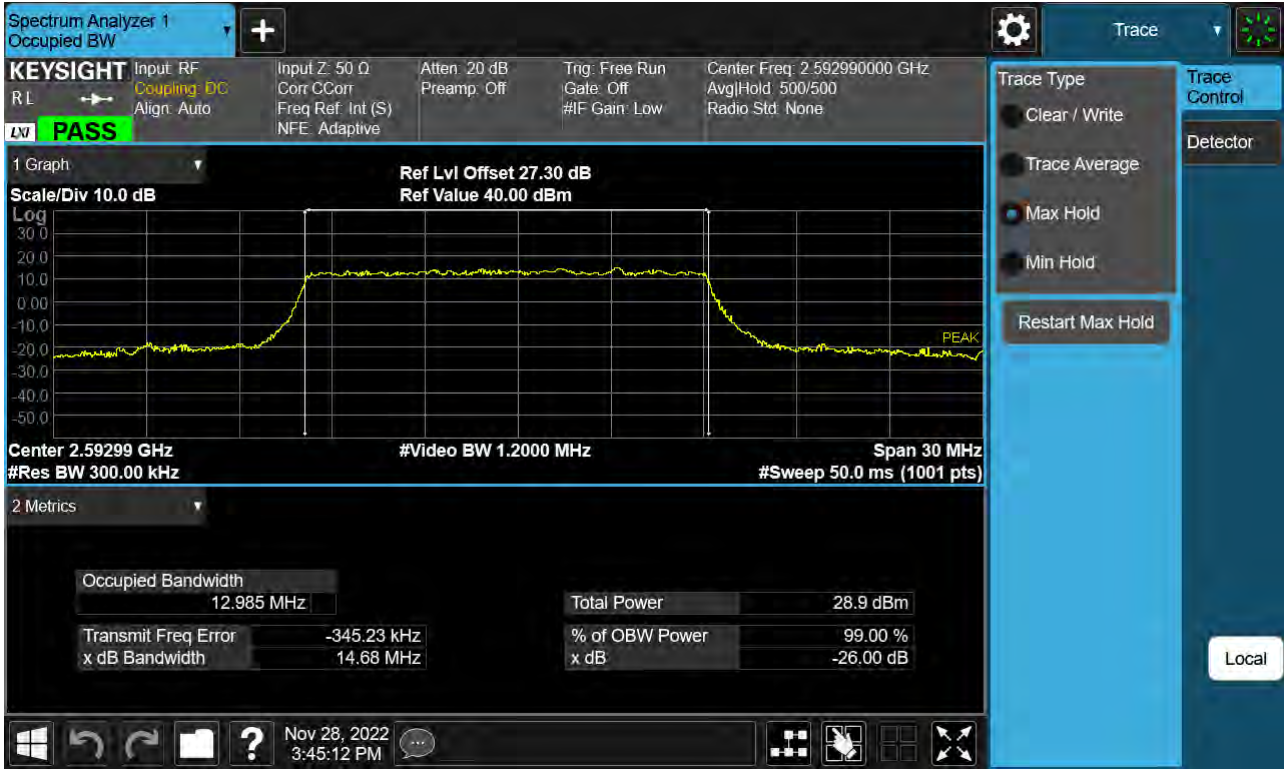


Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 BPSK)

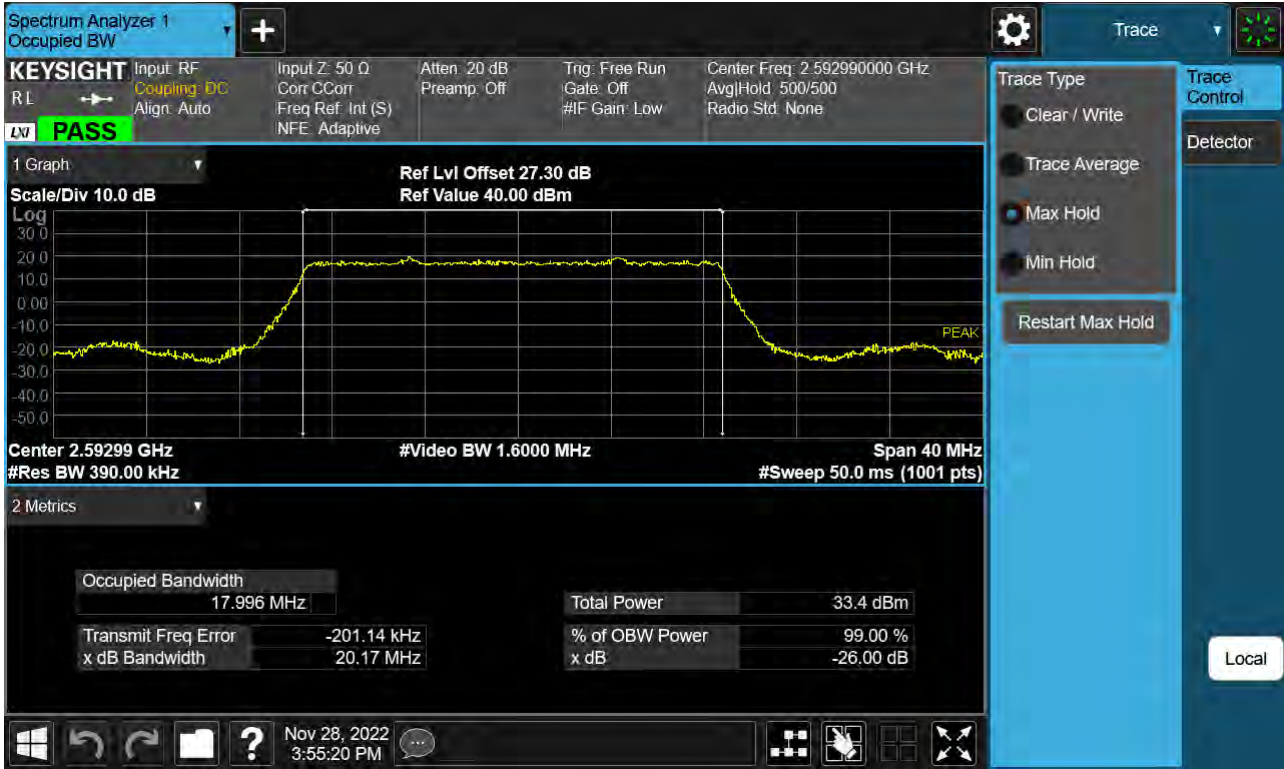


Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 QPSK)

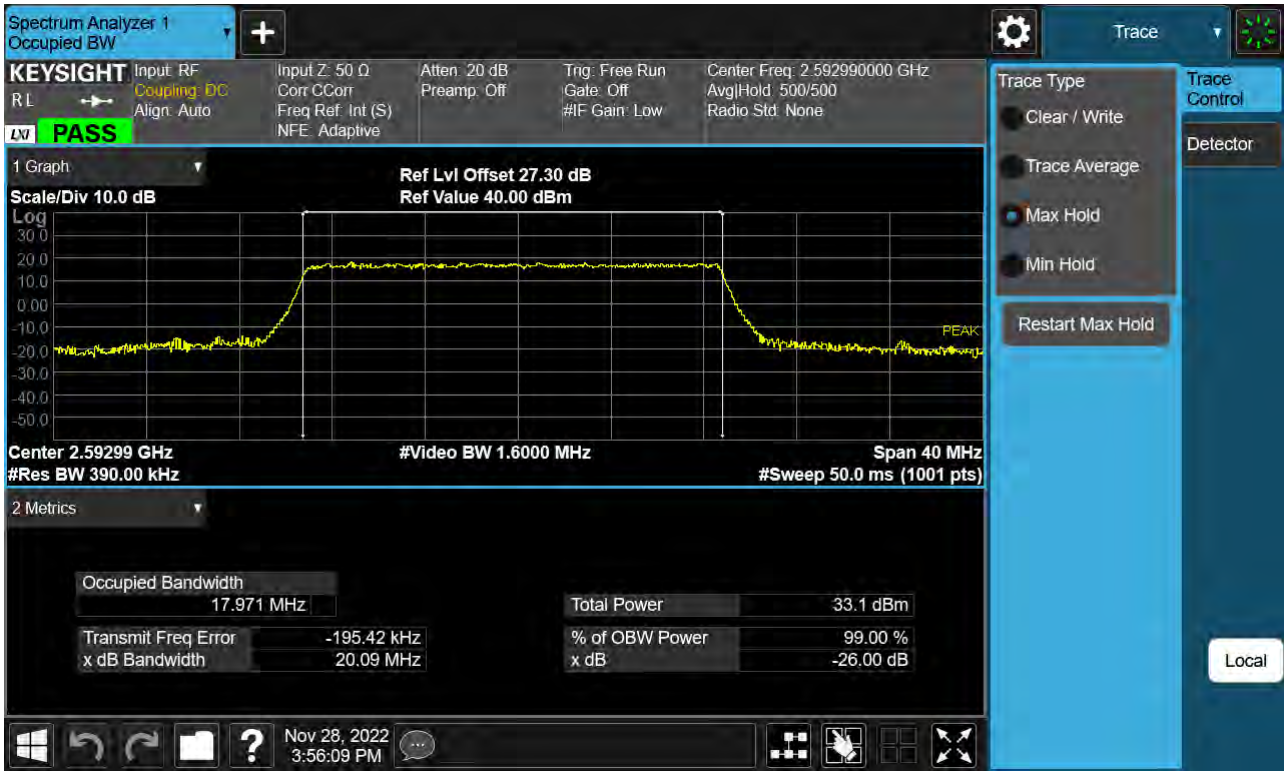


Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 16-QAM)

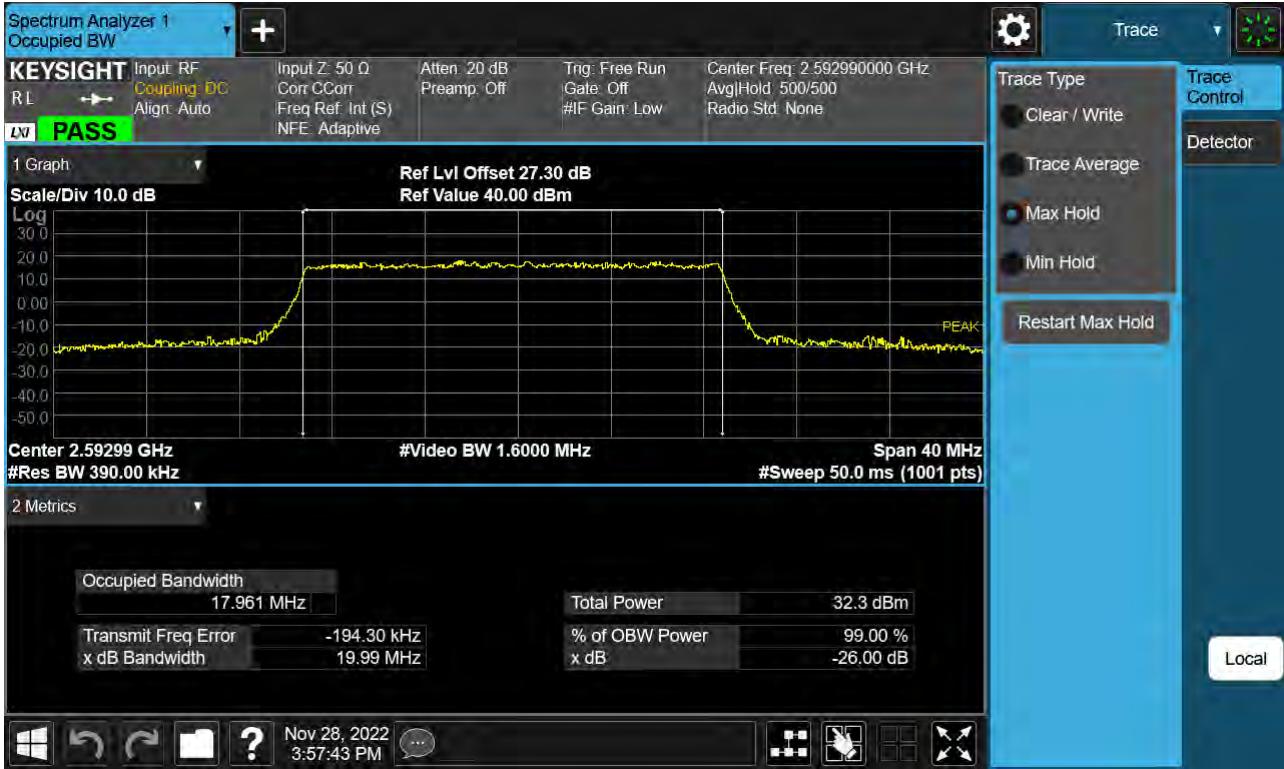


Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 64-QAM)

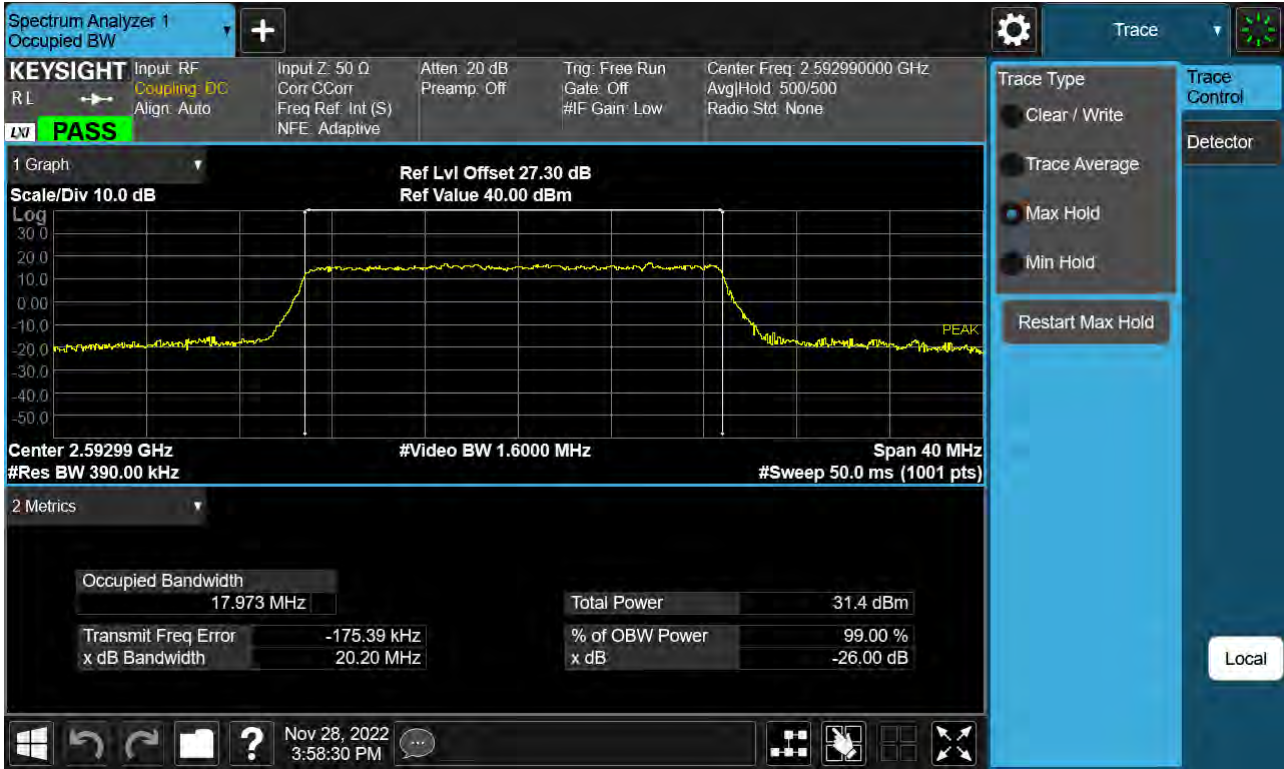


Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 256-QAM)

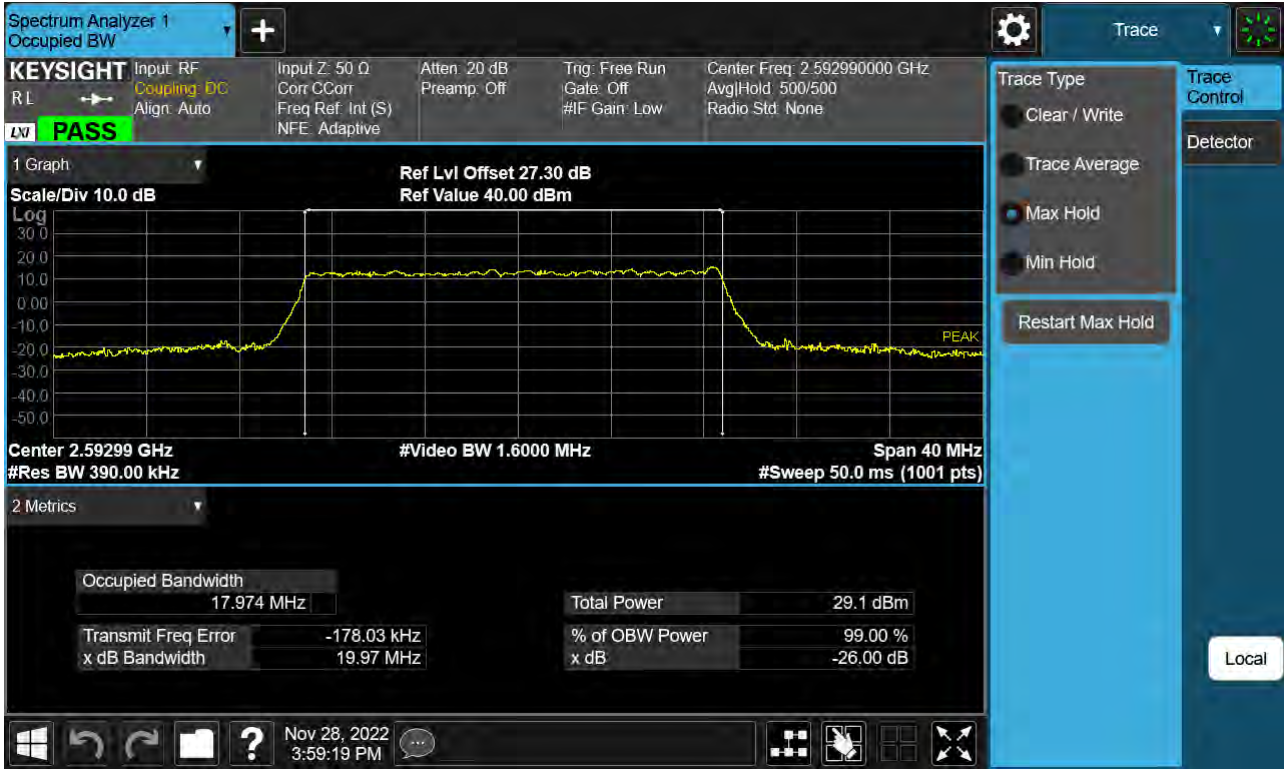


Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 BPSK)

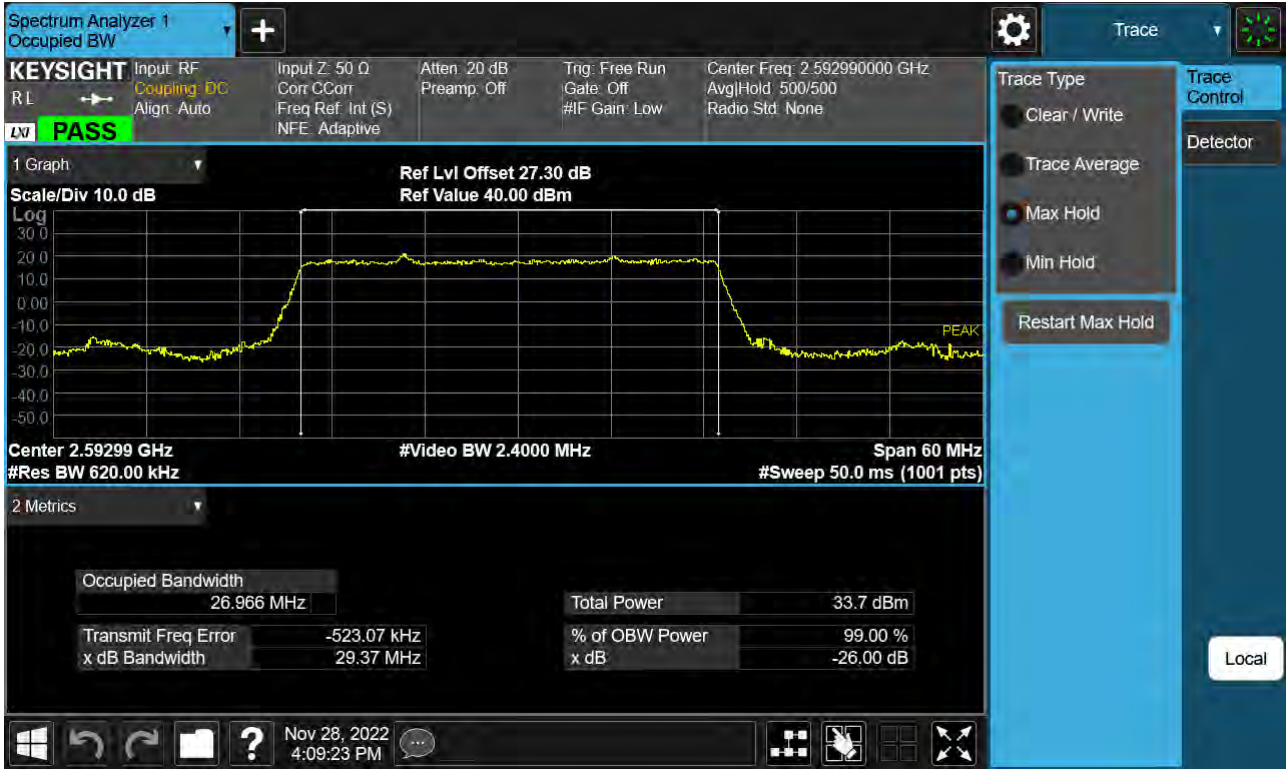


Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 QPSK)

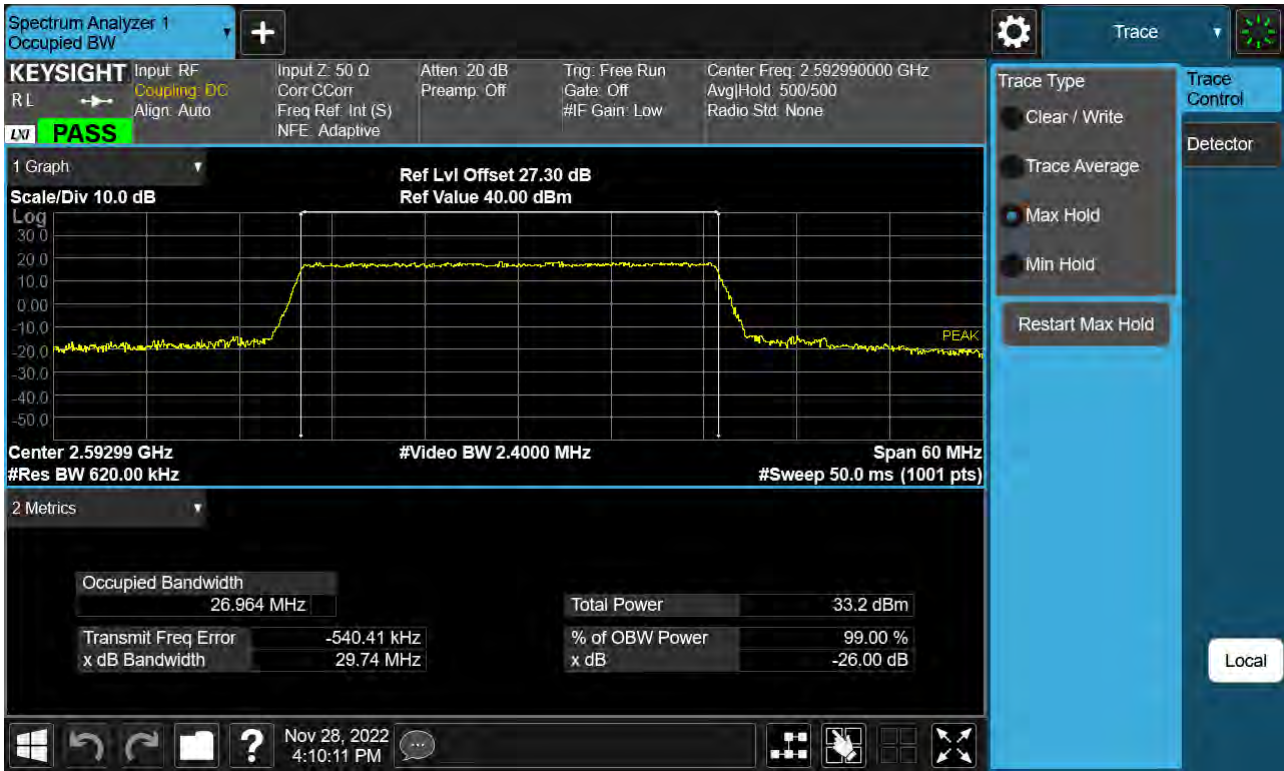


Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 16-QAM)

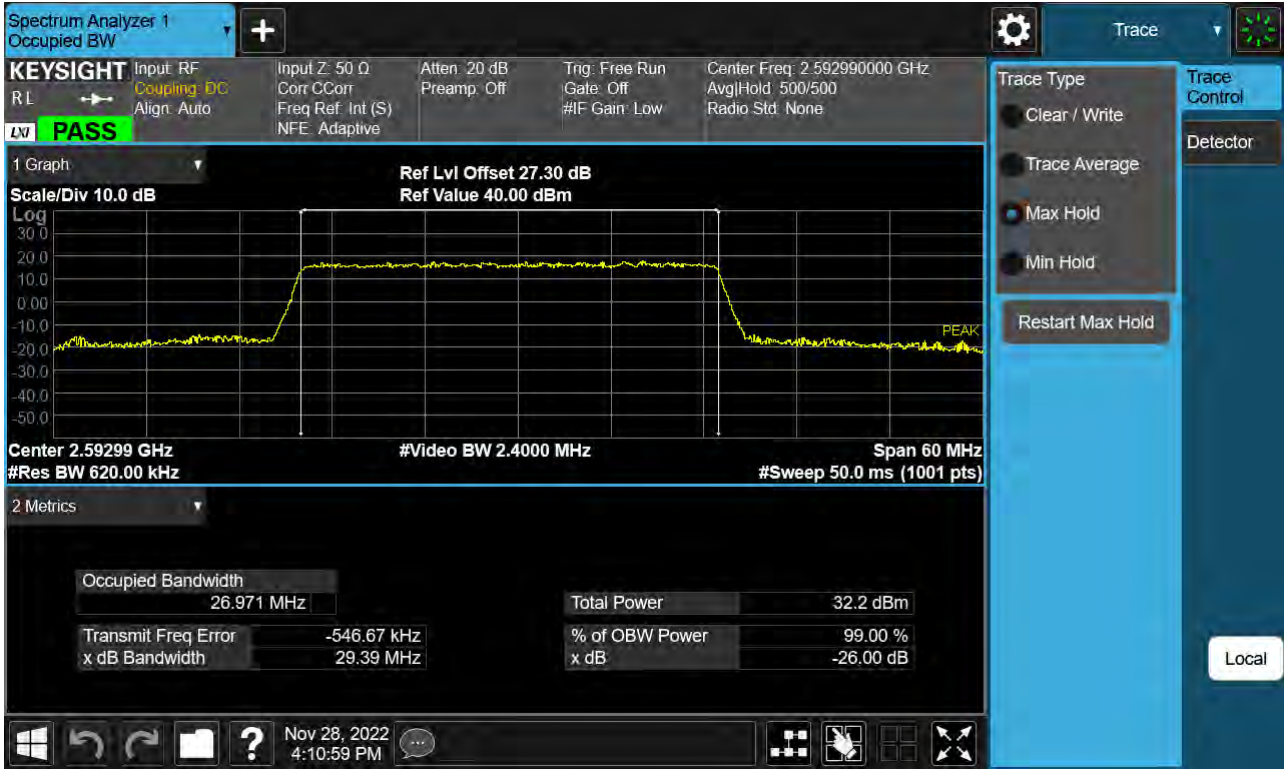


Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 64-QAM)

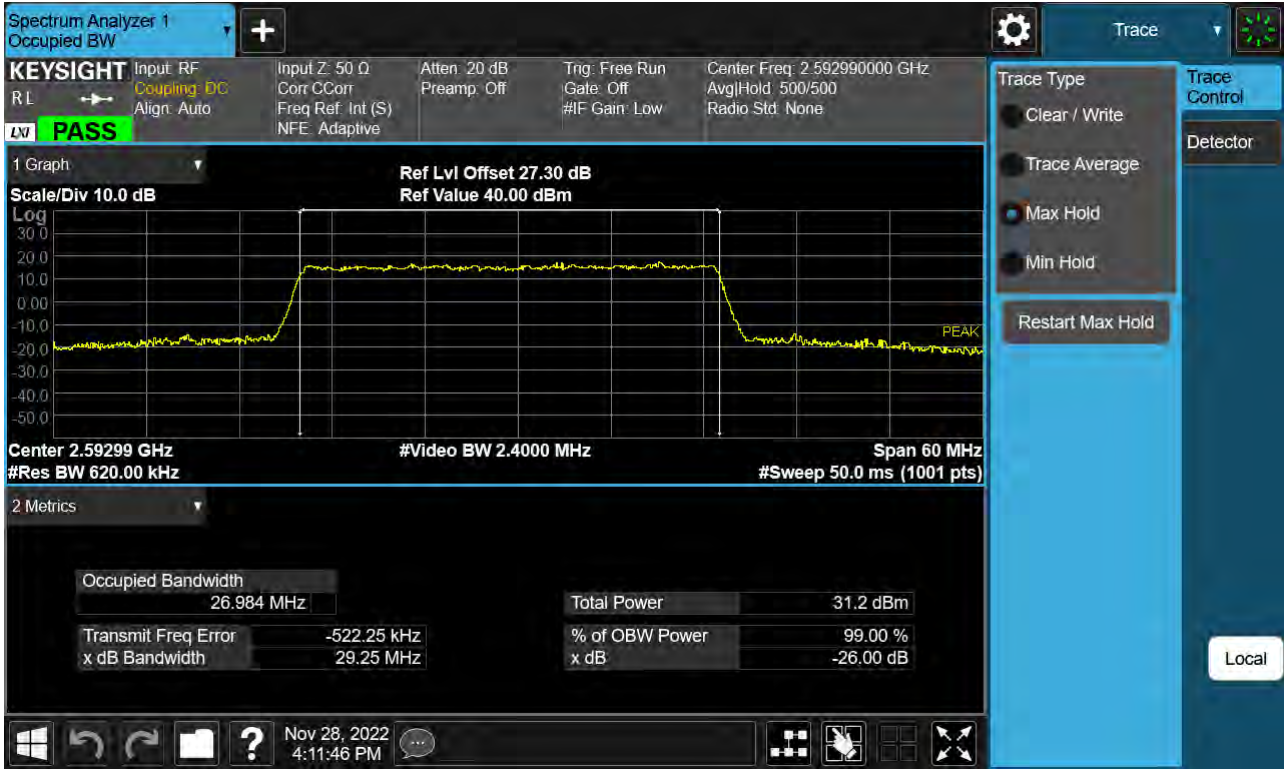


Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 256-QAM)

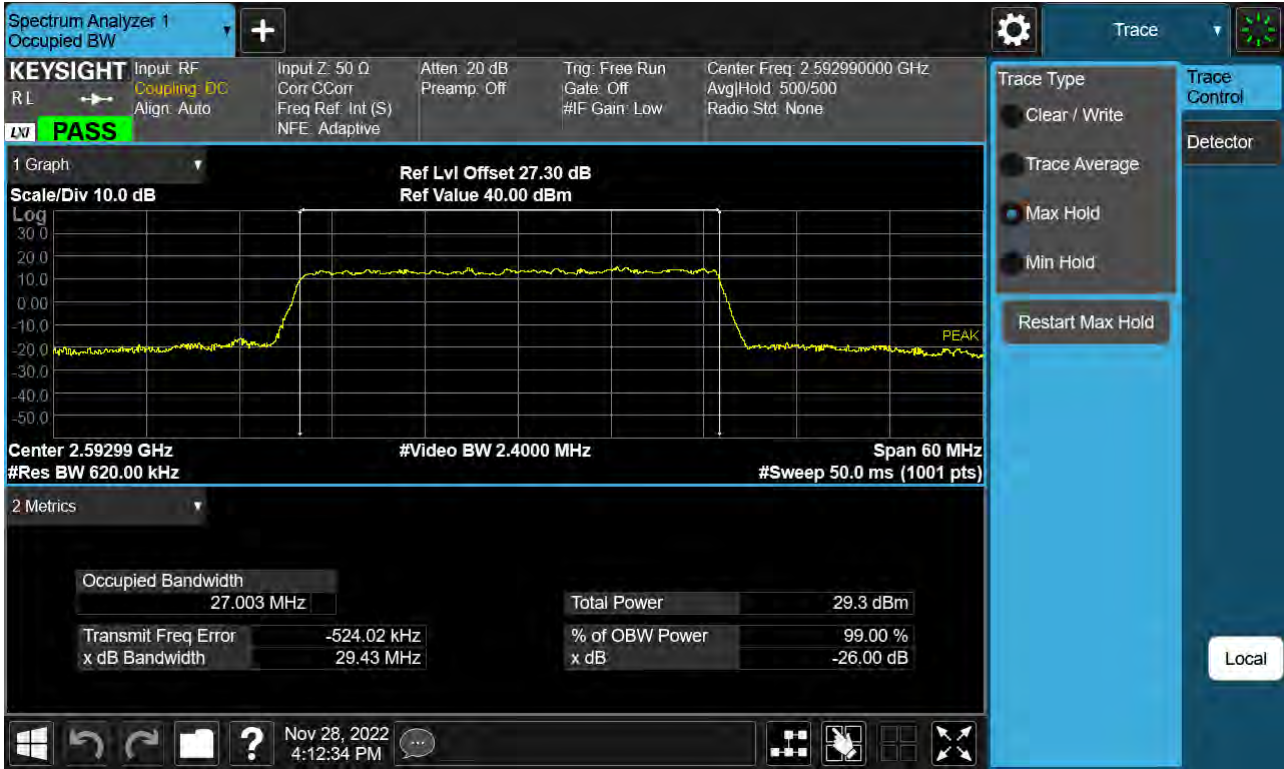


Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 BPSK)

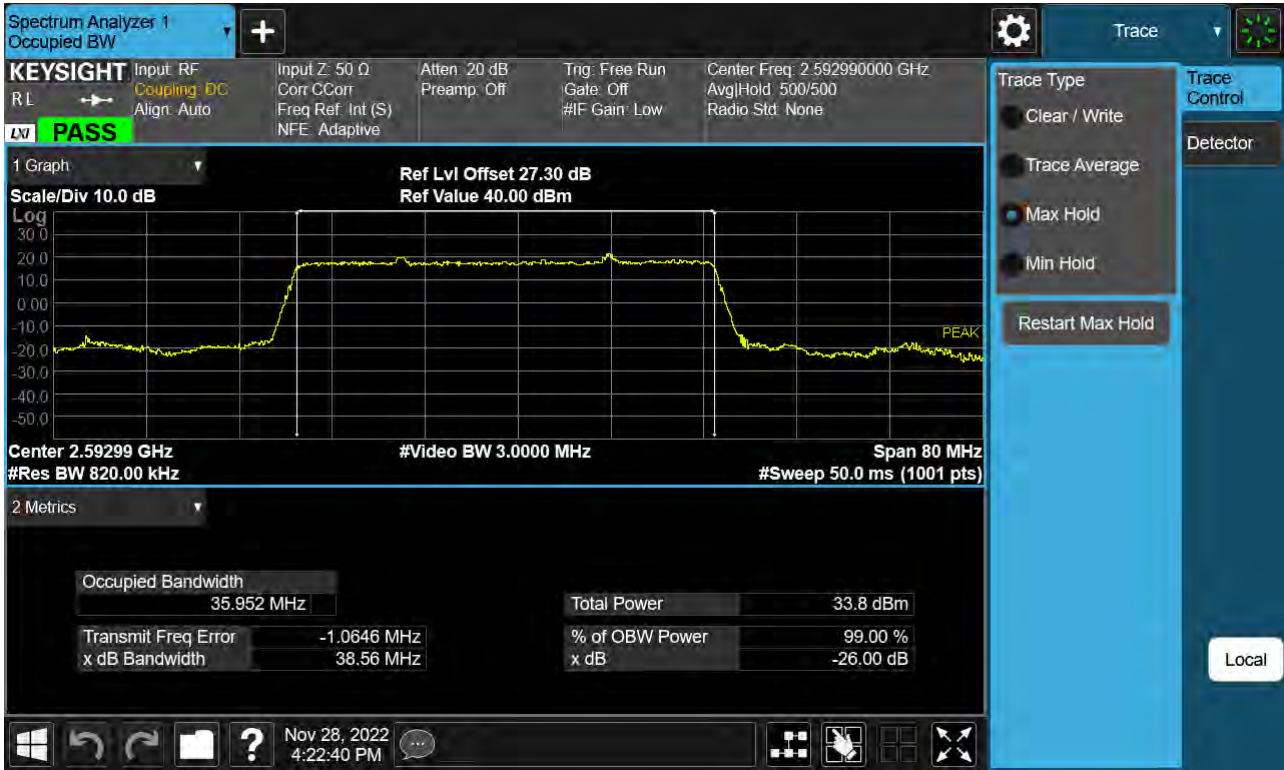

Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 QPSK)

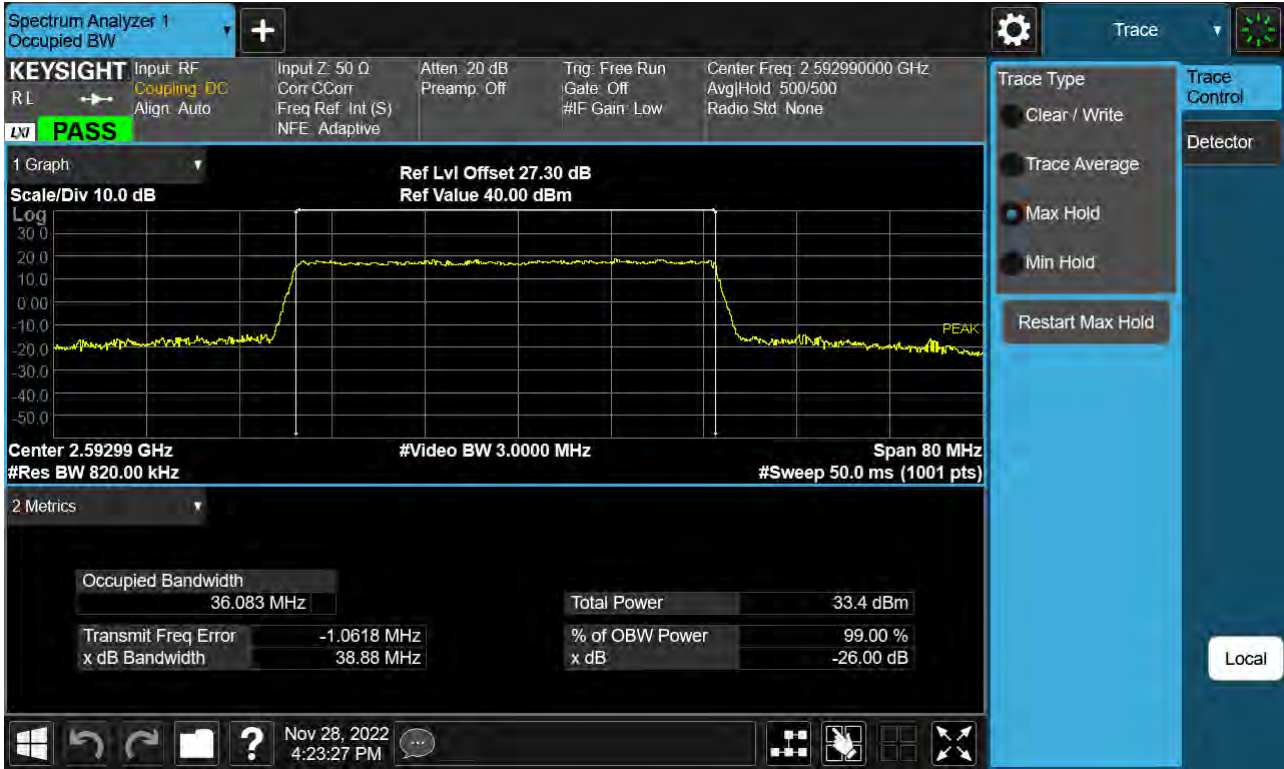


Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 16-QAM)

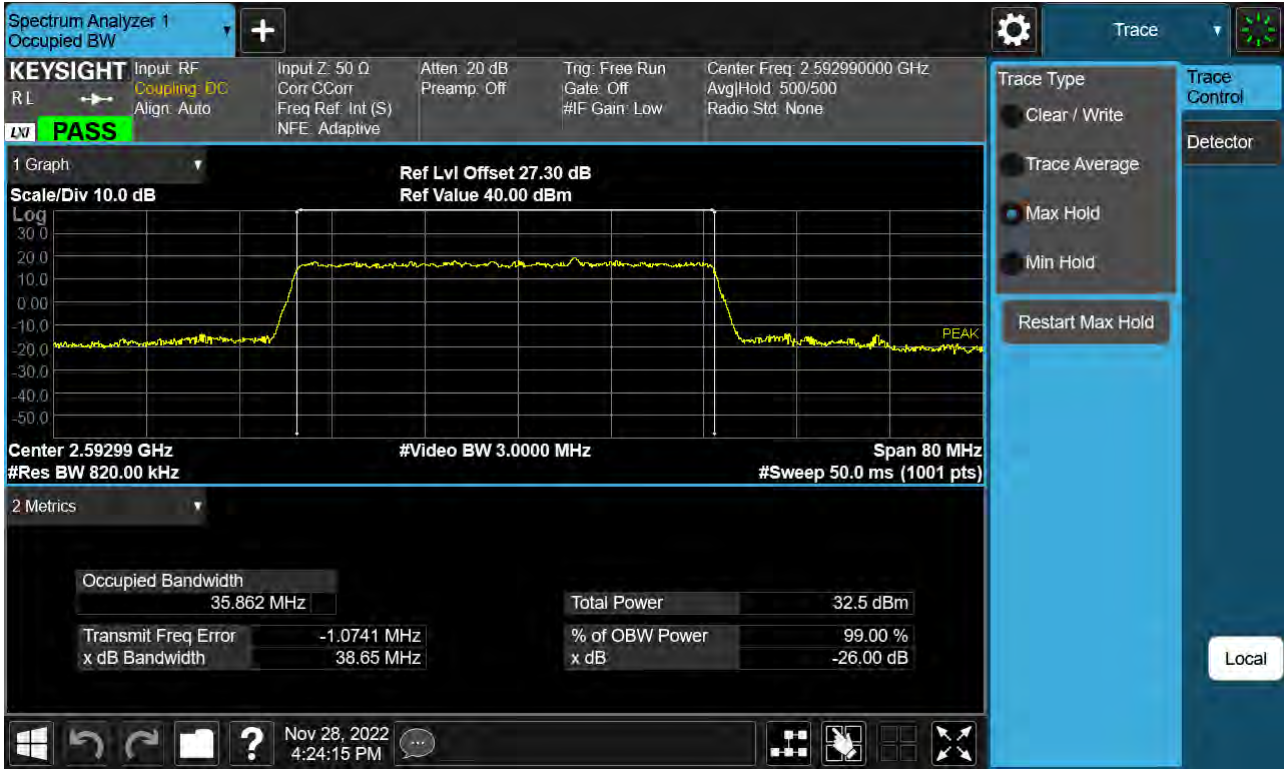


Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 64-QAM)



Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 256-QAM)

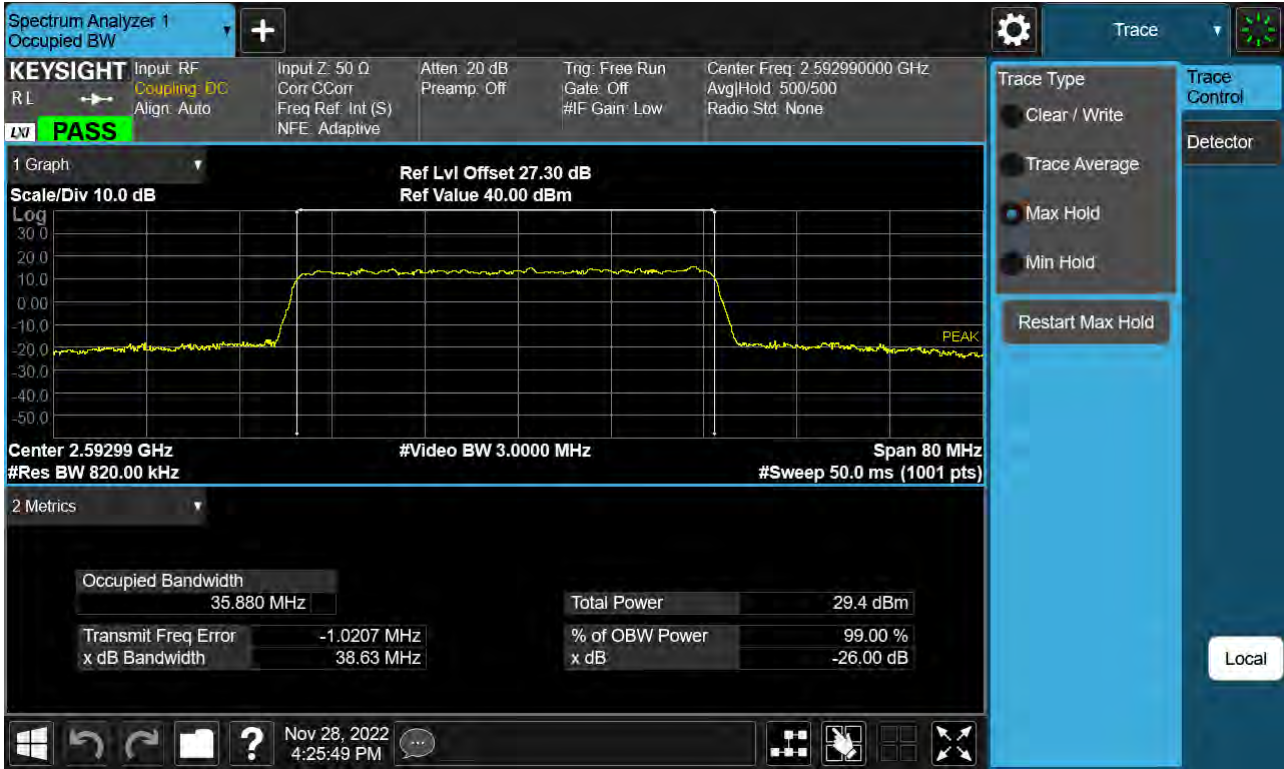


Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 BPSK)

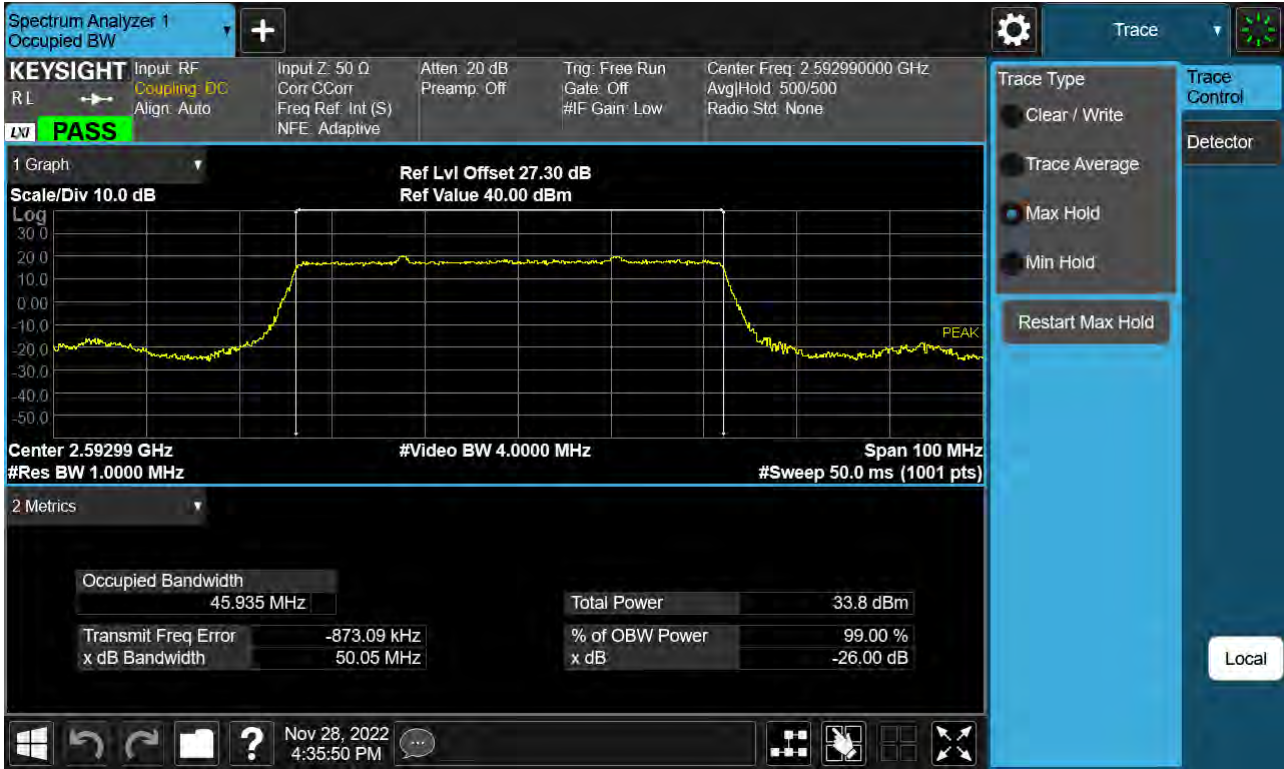

Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 QPSK)



Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 16-QAM)

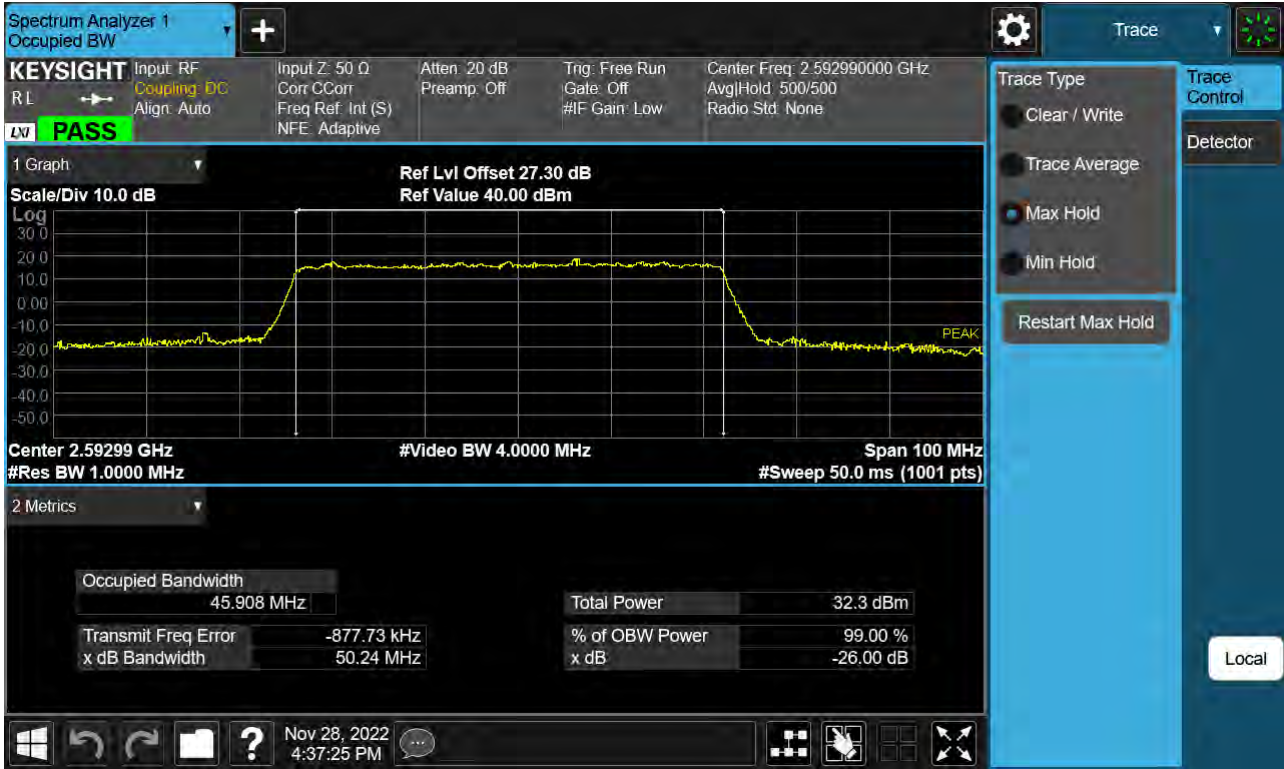


Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 64-QAM)




Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 256-QAM)




Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 BPSK)

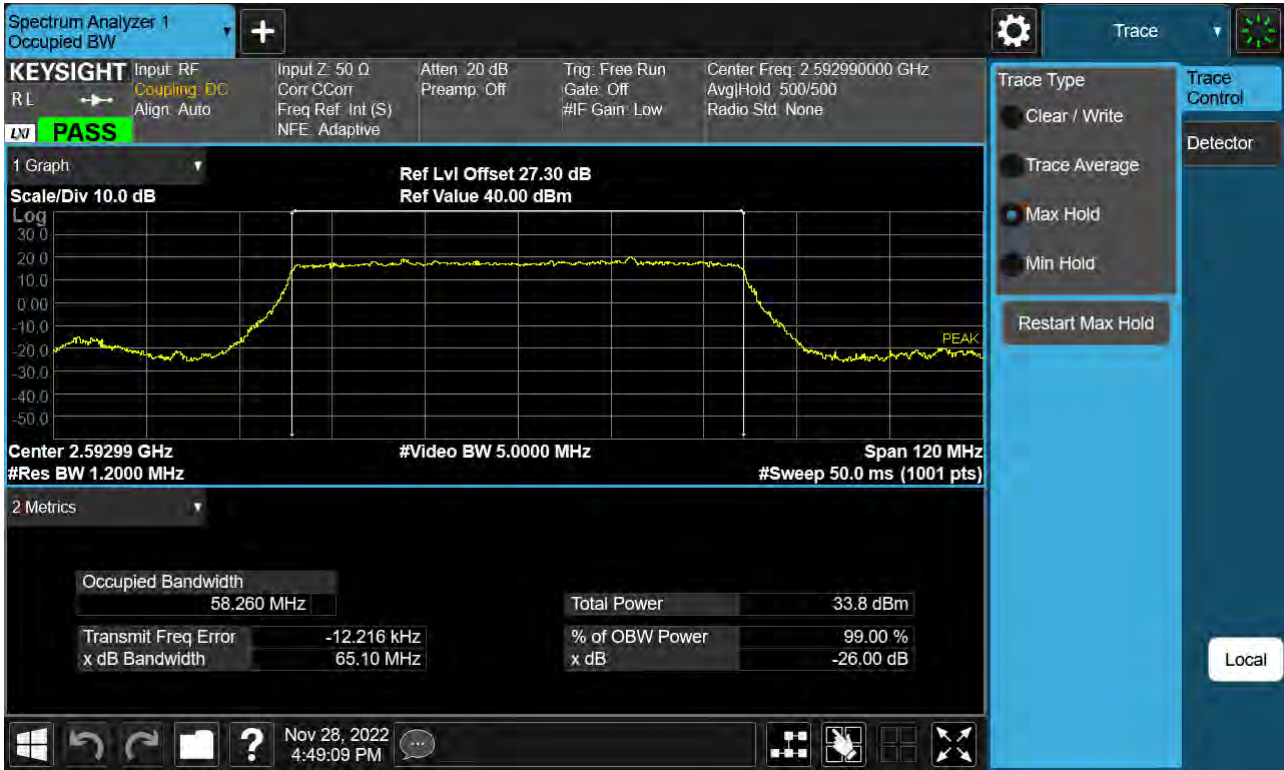


Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 QPSK)

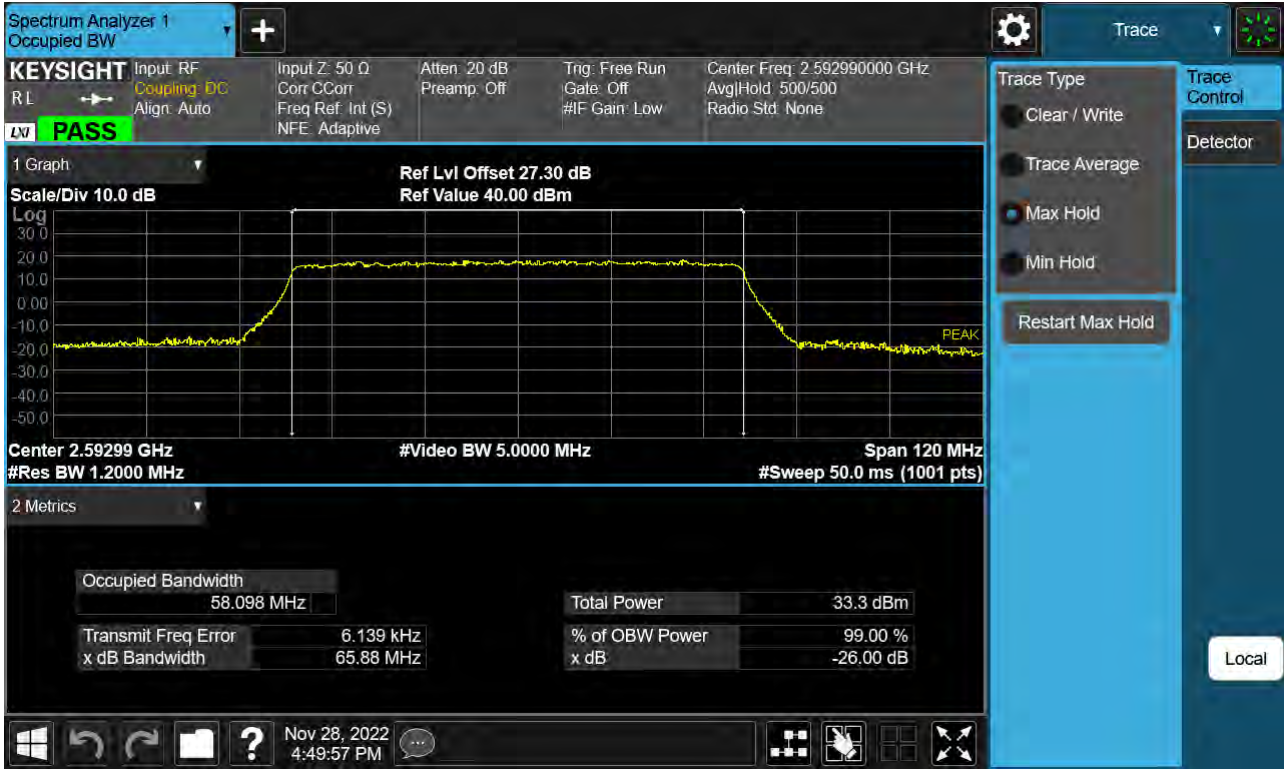


Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 16-QAM)

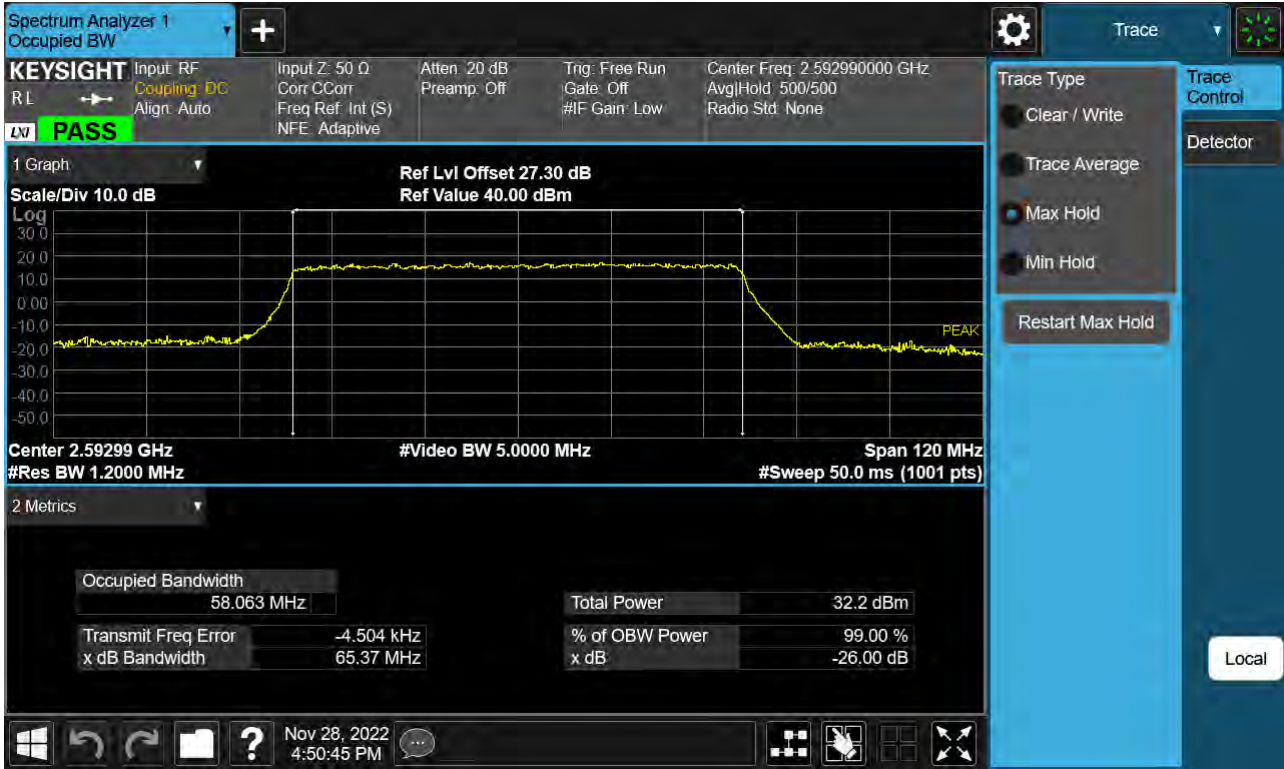


Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 64-QAM)

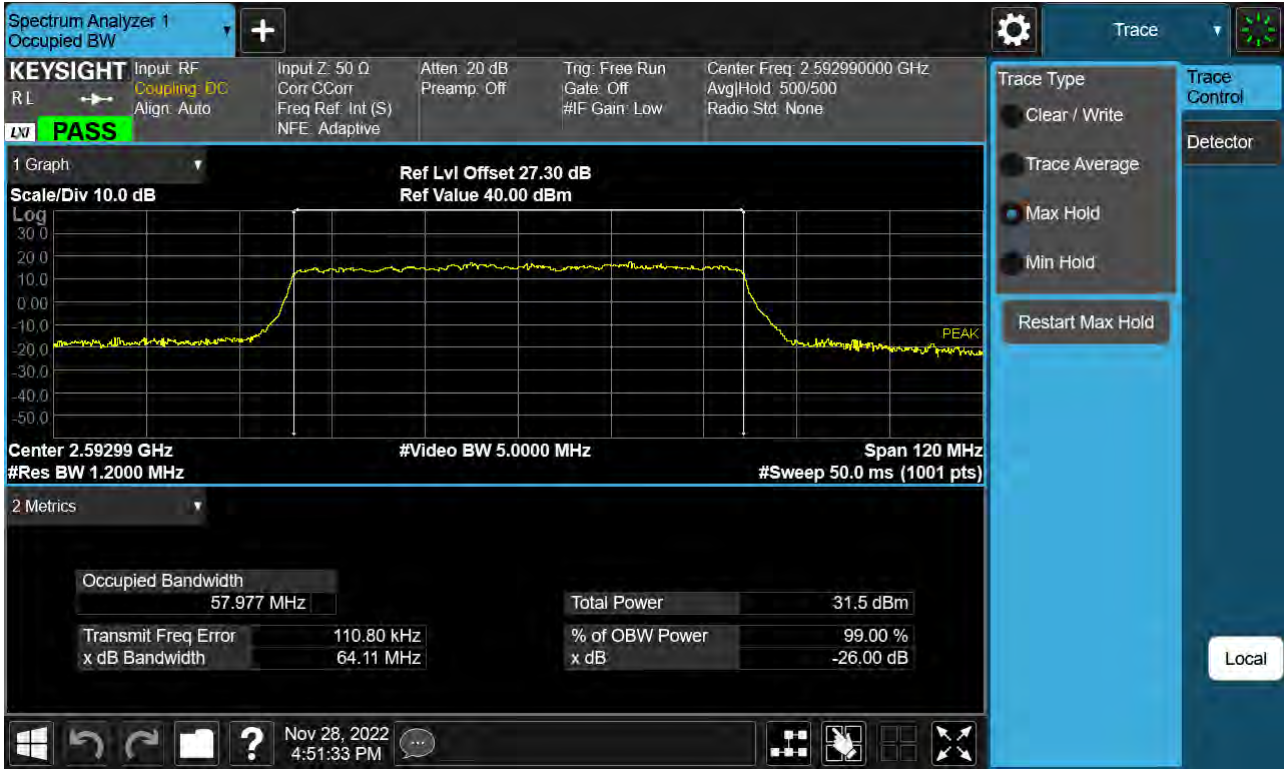

Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 256-QAM)

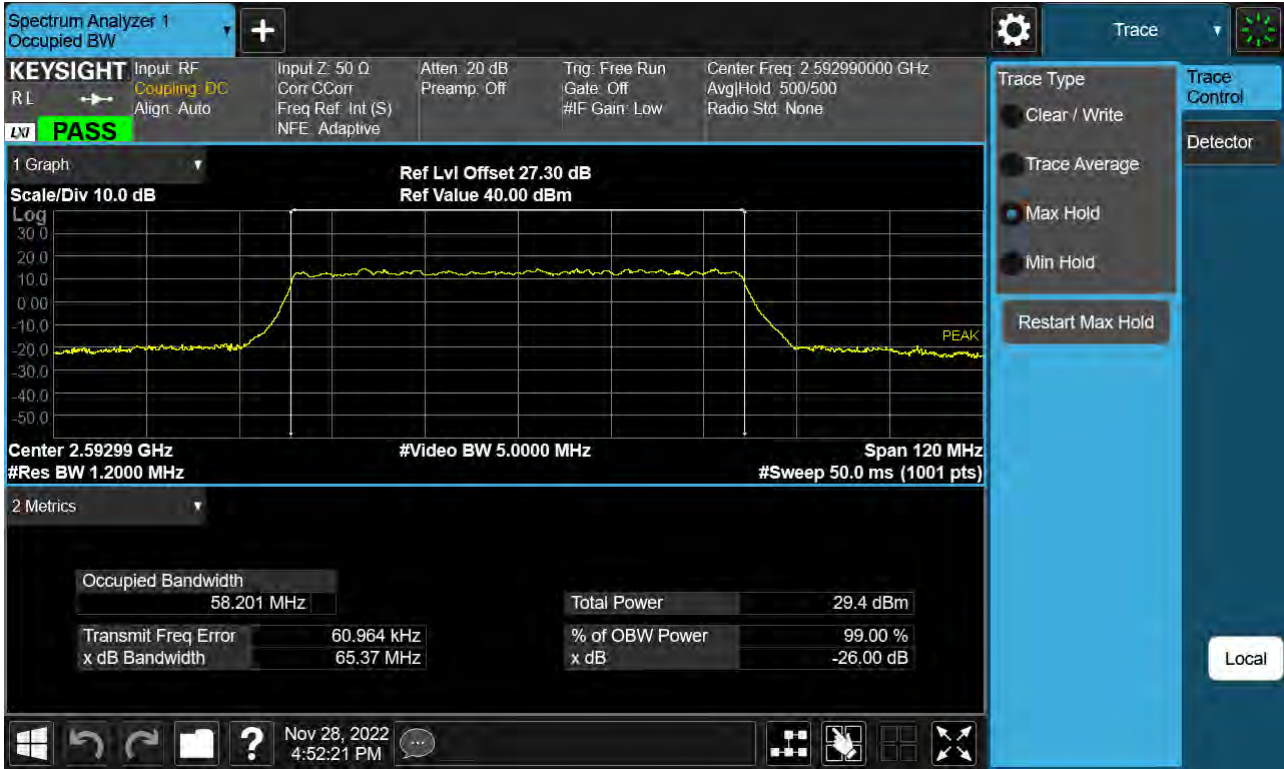


Sub6 n41. Occupied Bandwidth Plot (70 MHz Ch.518598 BPSK)

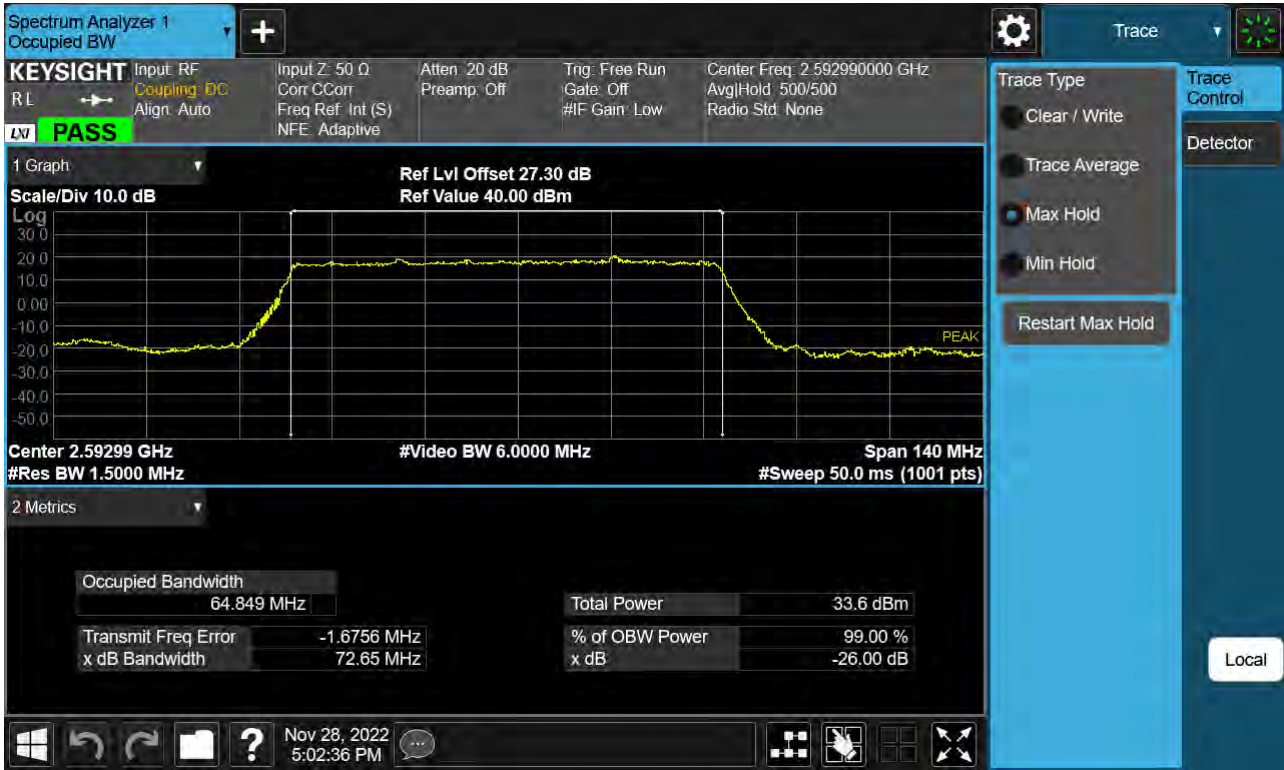

Sub6 n41. Occupied Bandwidth Plot (70 MHz Ch.518598 QPSK)



Sub6 n41. Occupied Bandwidth Plot (70 MHz Ch.518598 16-QAM)

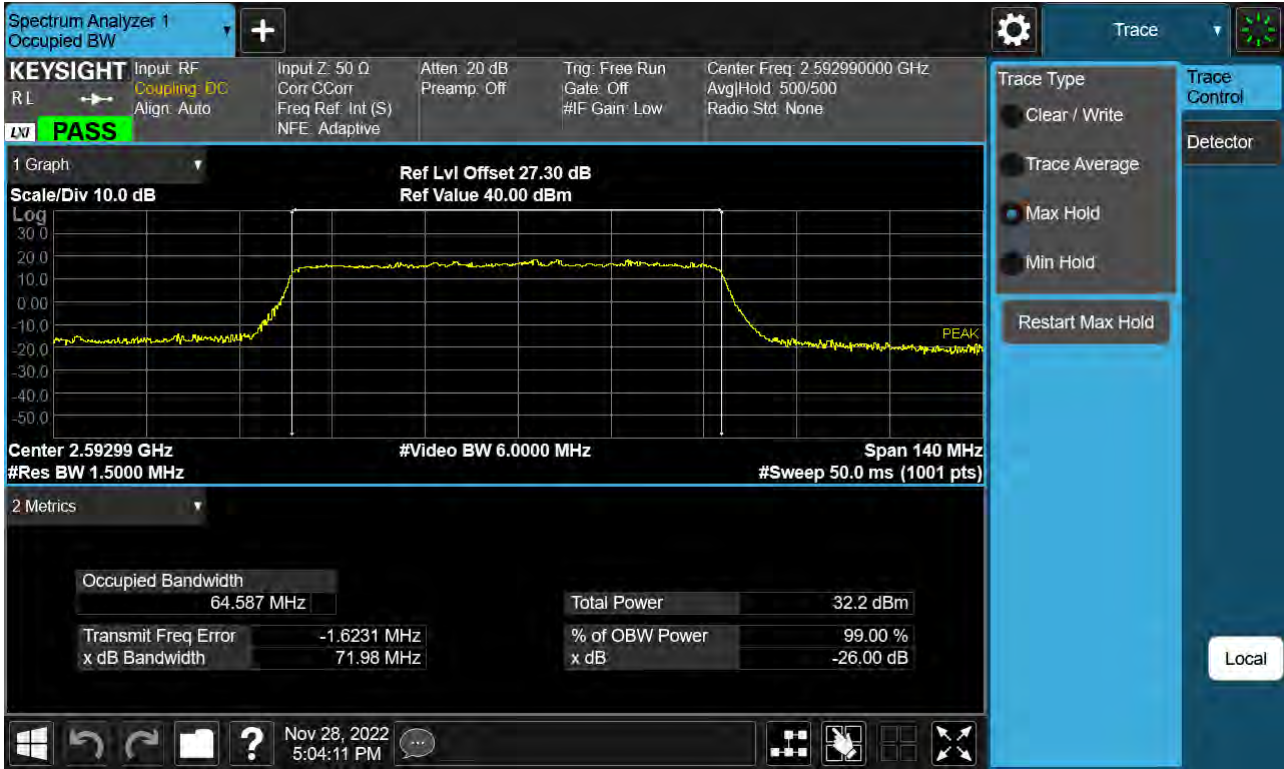


Sub6 n41. Occupied Bandwidth Plot (70 MHz Ch.518598 64-QAM)



Sub6 n41. Occupied Bandwidth Plot (70 MHz Ch.518598 256-QAM)



Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 BPSK)

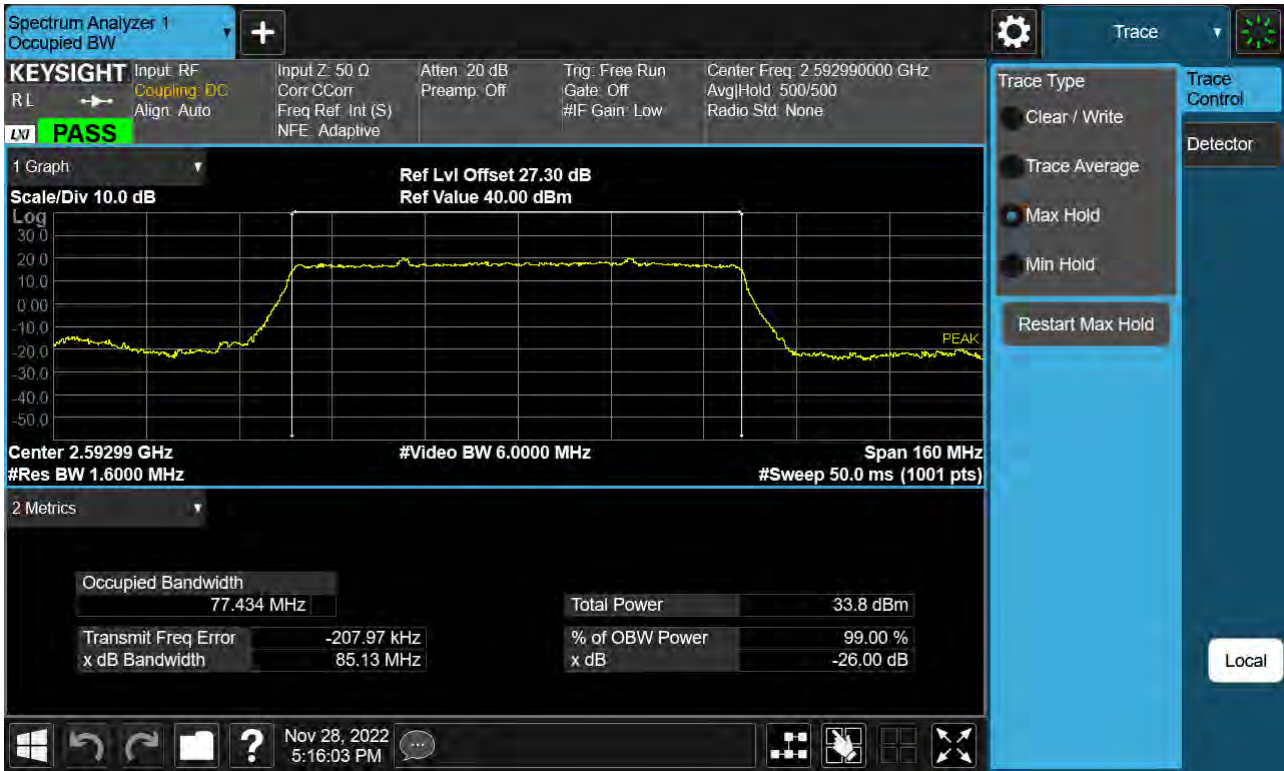


Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 QPSK)



Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 16-QAM)




Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 64-QAM)

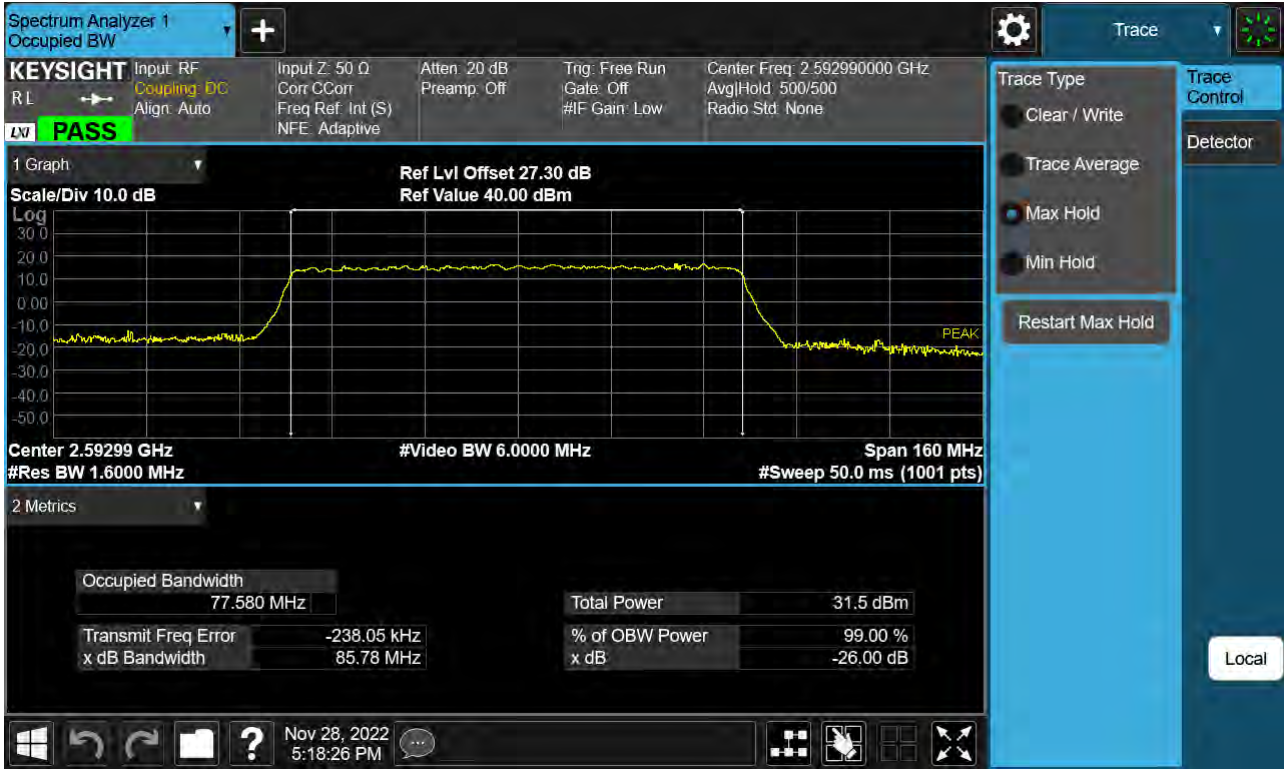


Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 256-QAM)




Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 BPSK)

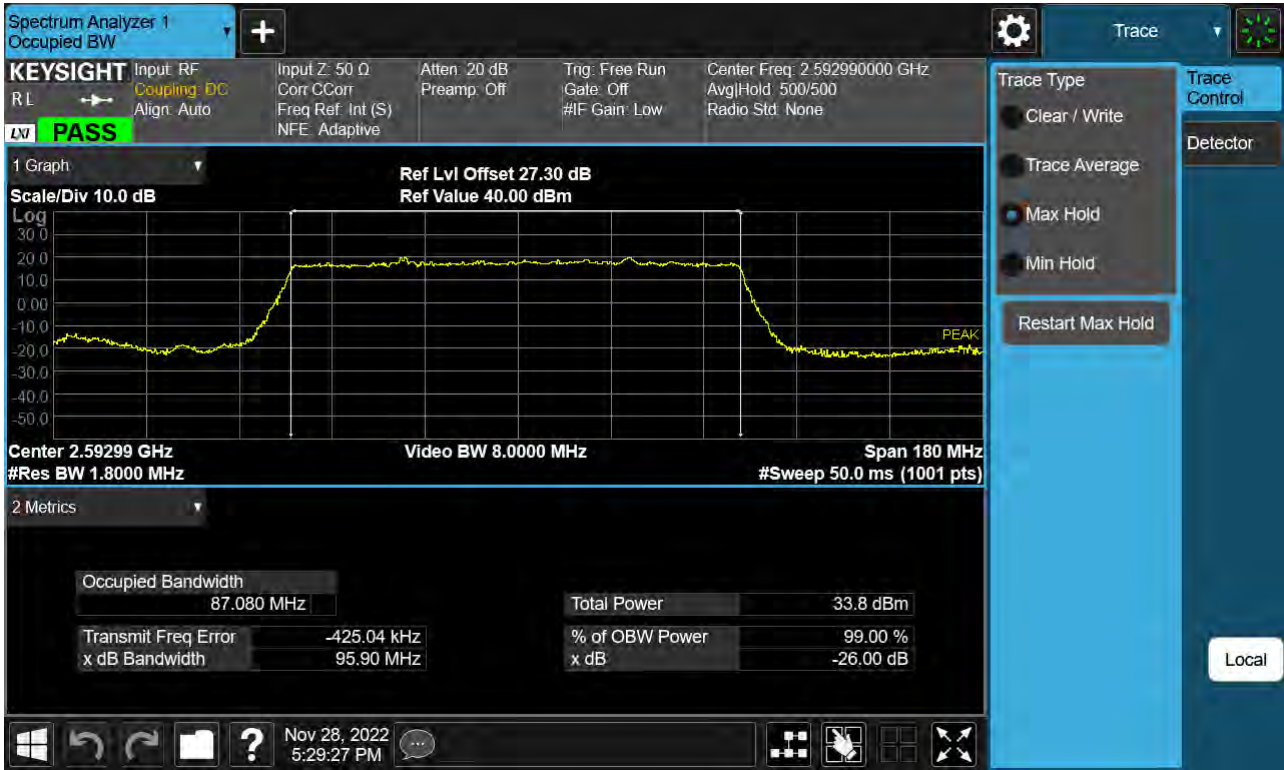


Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 QPSK)

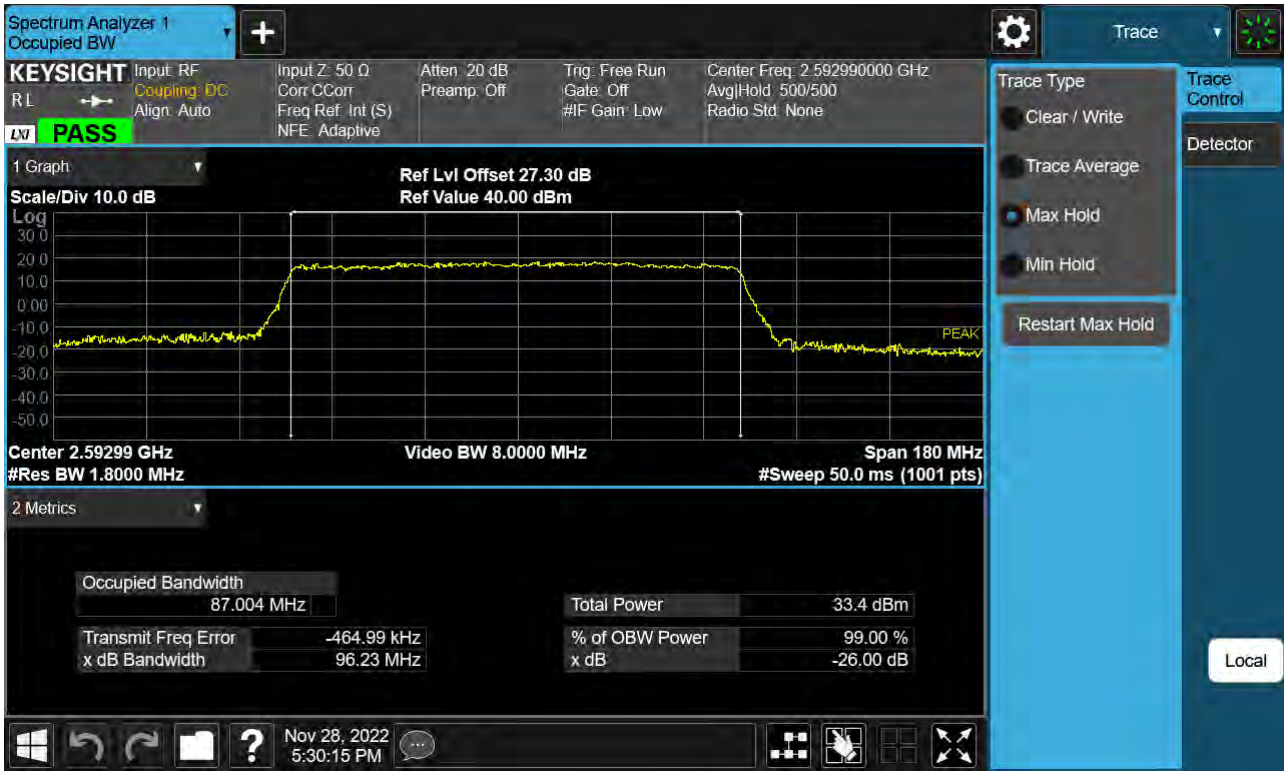


Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 16-QAM)

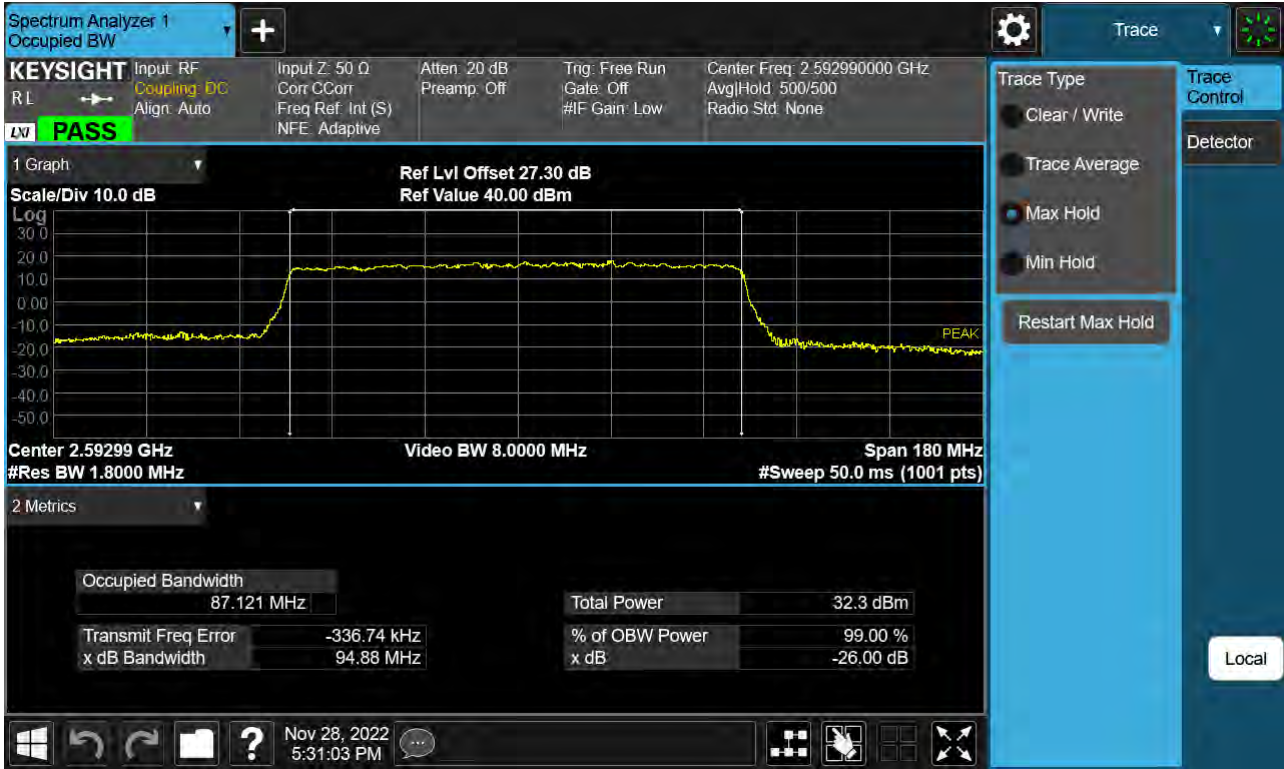

Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 64-QAM)

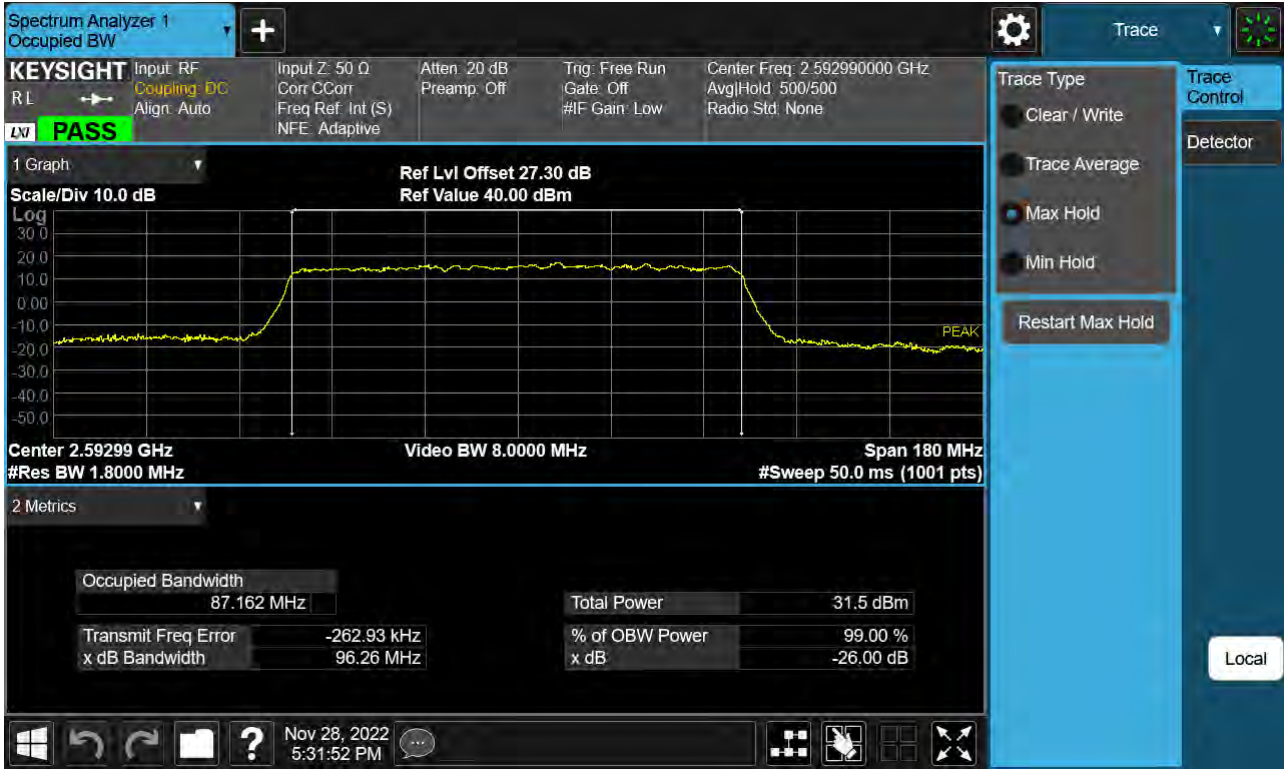

Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 256-QAM)

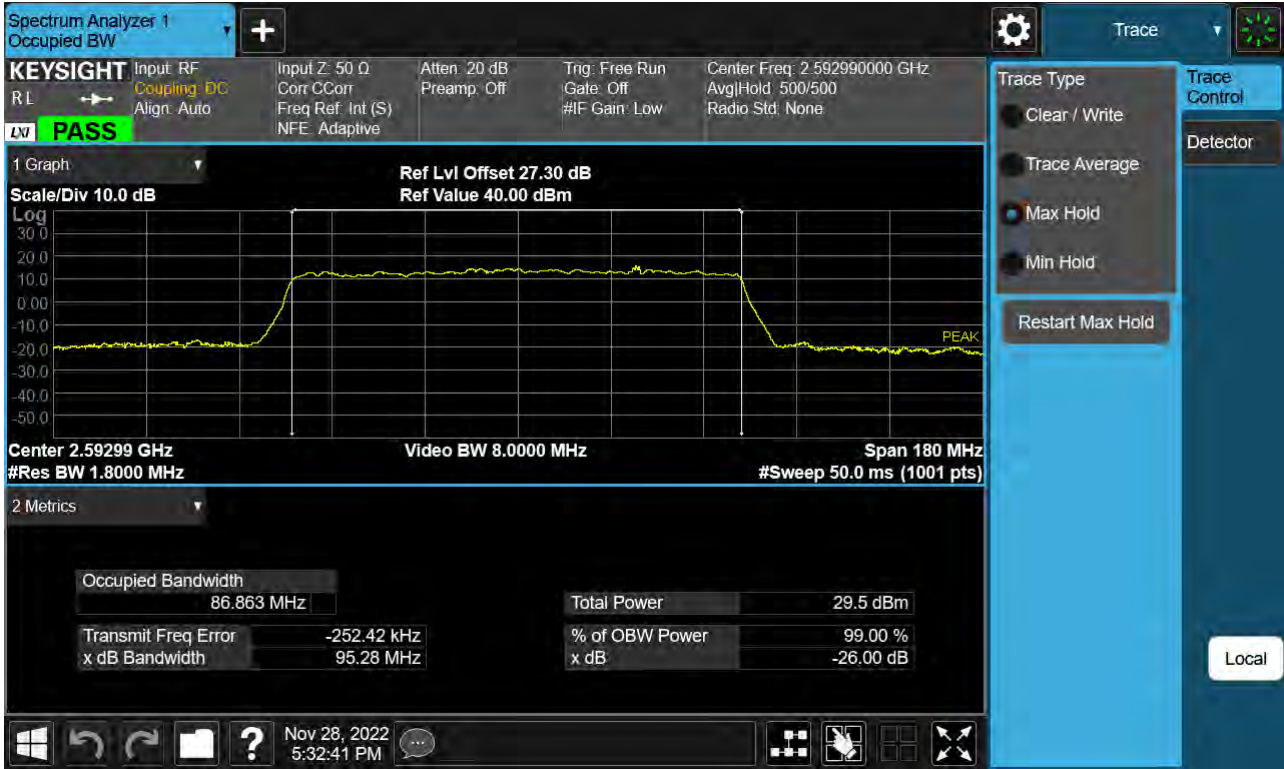


Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 BPSK)



Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 QPSK)




Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 16-QAM)

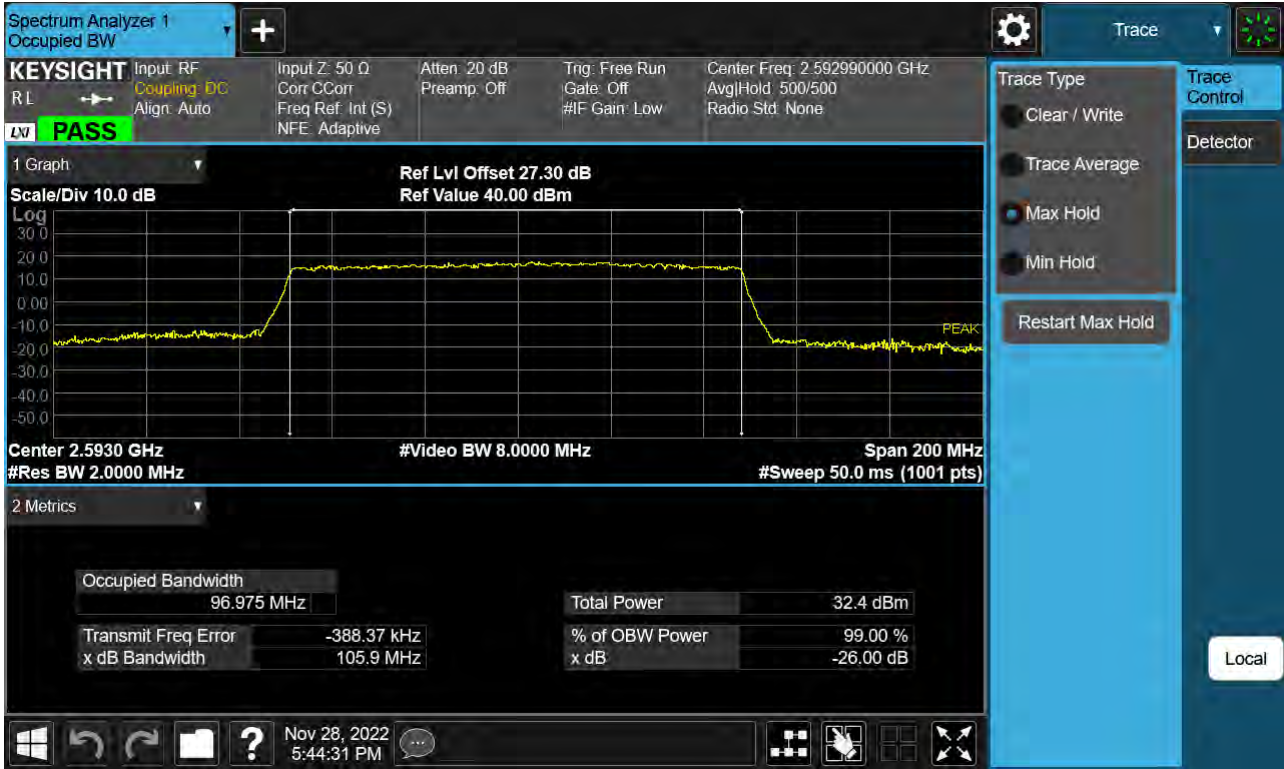


Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 64-QAM)




Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 256-QAM)

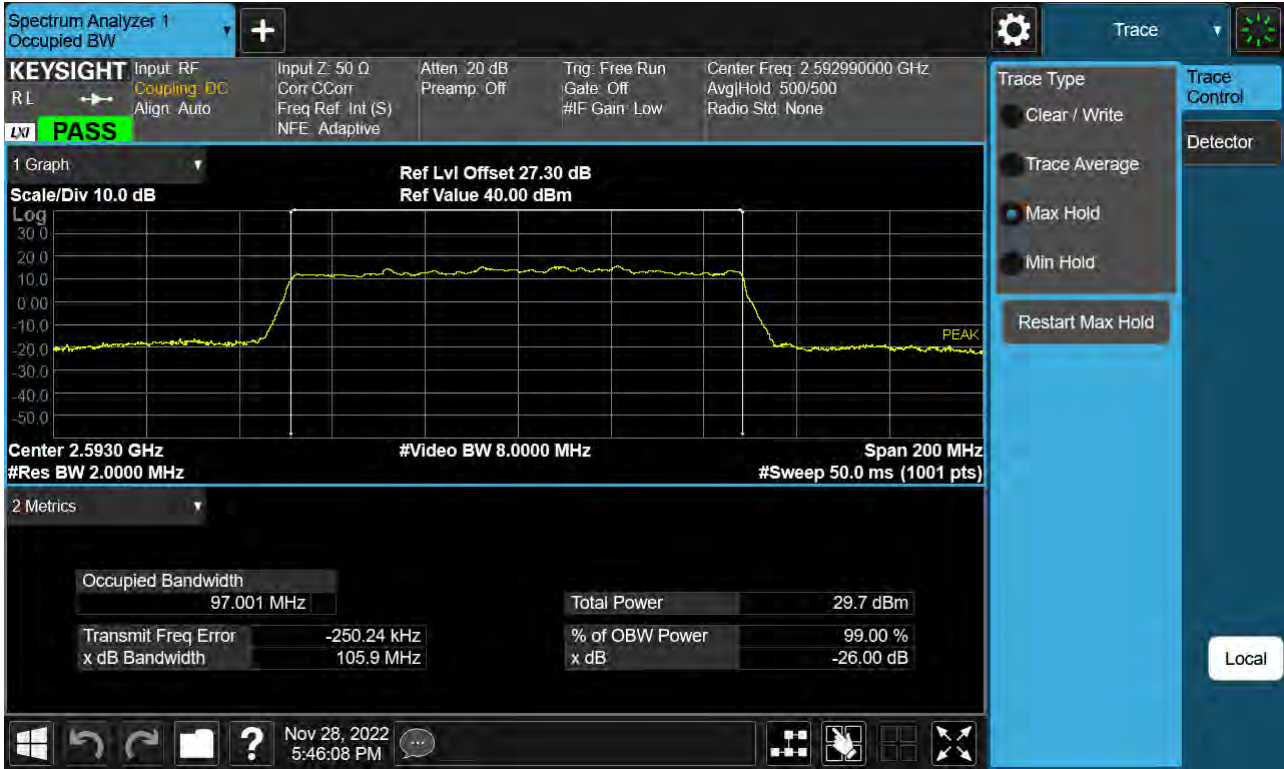

Sub6 n41. PAR Plot (10 M BW_Ch.518598_BPSK)

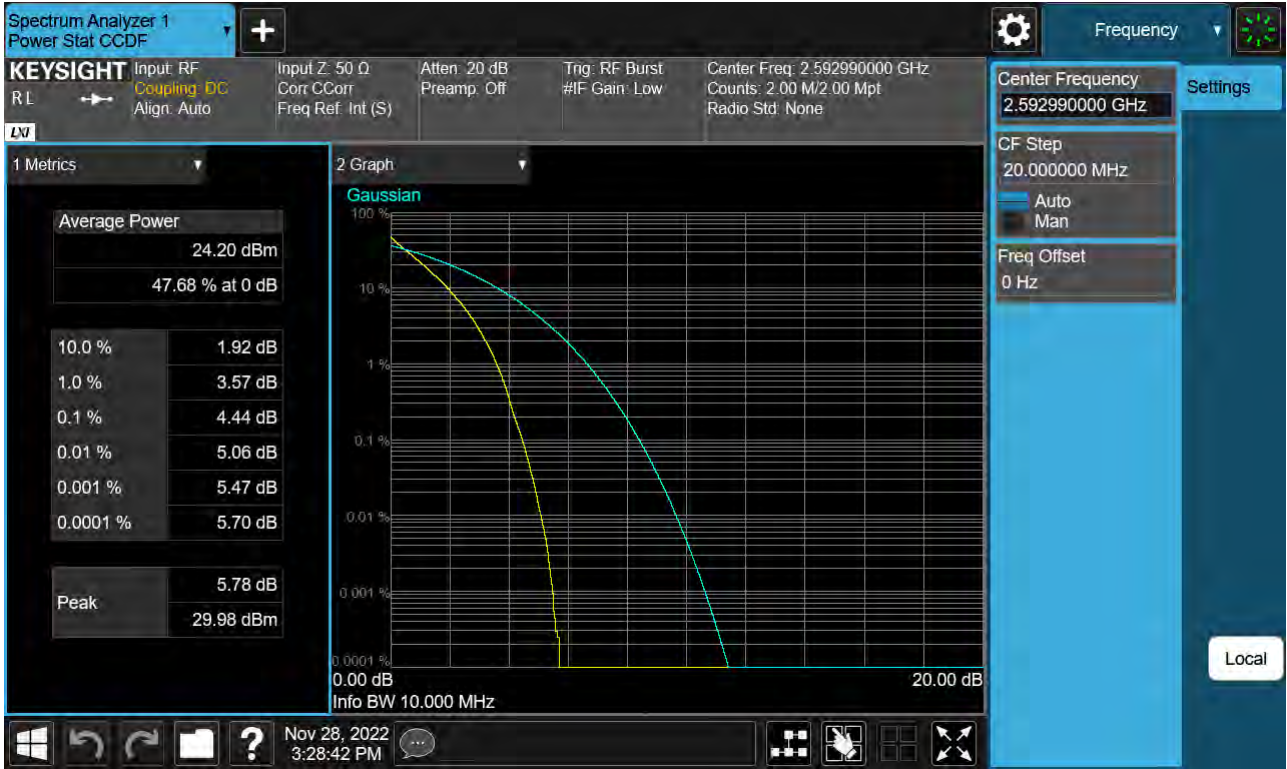

Sub6 n41. PAR Plot (10 M BW_Ch.518598_QPSK)

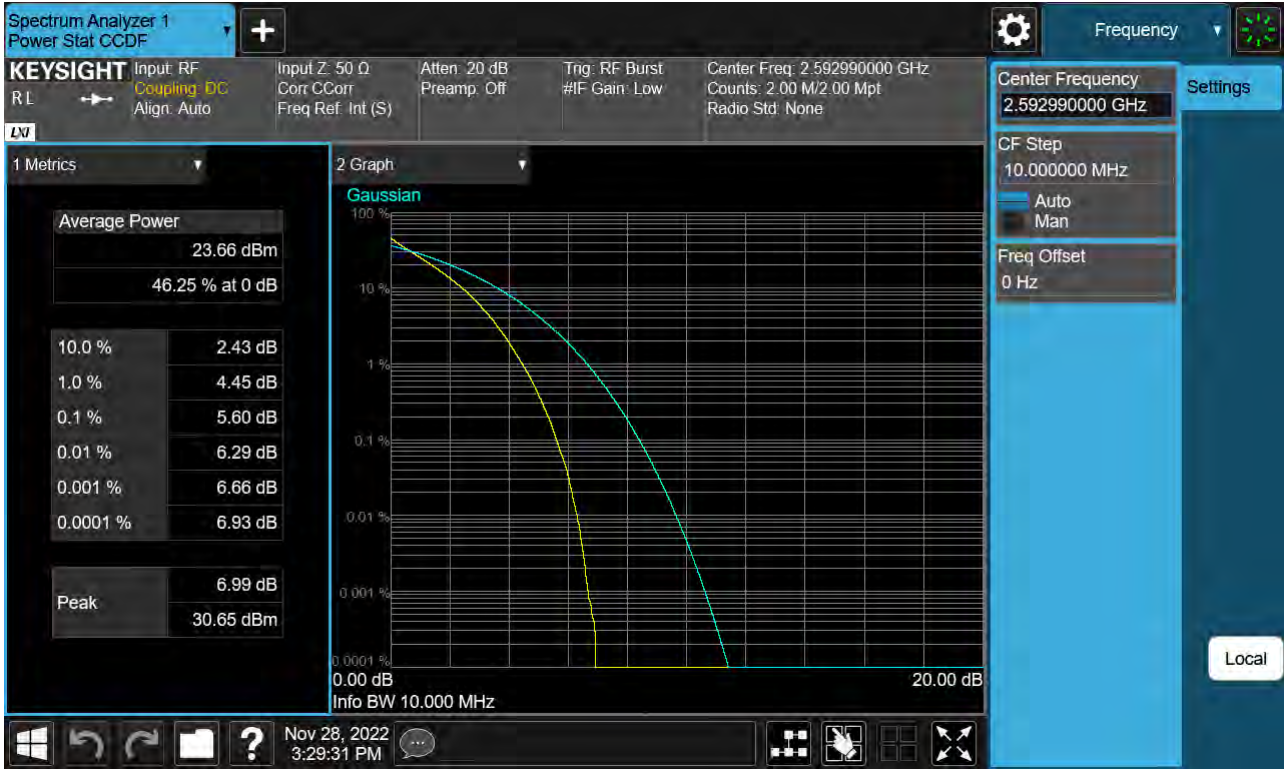

Sub6 n41. PAR Plot (10 M BW_Ch.518598_16QAM)




Sub6 n41. PAR Plot (10 M BW_Ch.518598_64QAM)



Sub6 n41. PAR Plot (10 M BW_Ch.518598_256QAM)



Sub6 n41. PAR Plot (15 M BW_Ch.518598_BPSK)

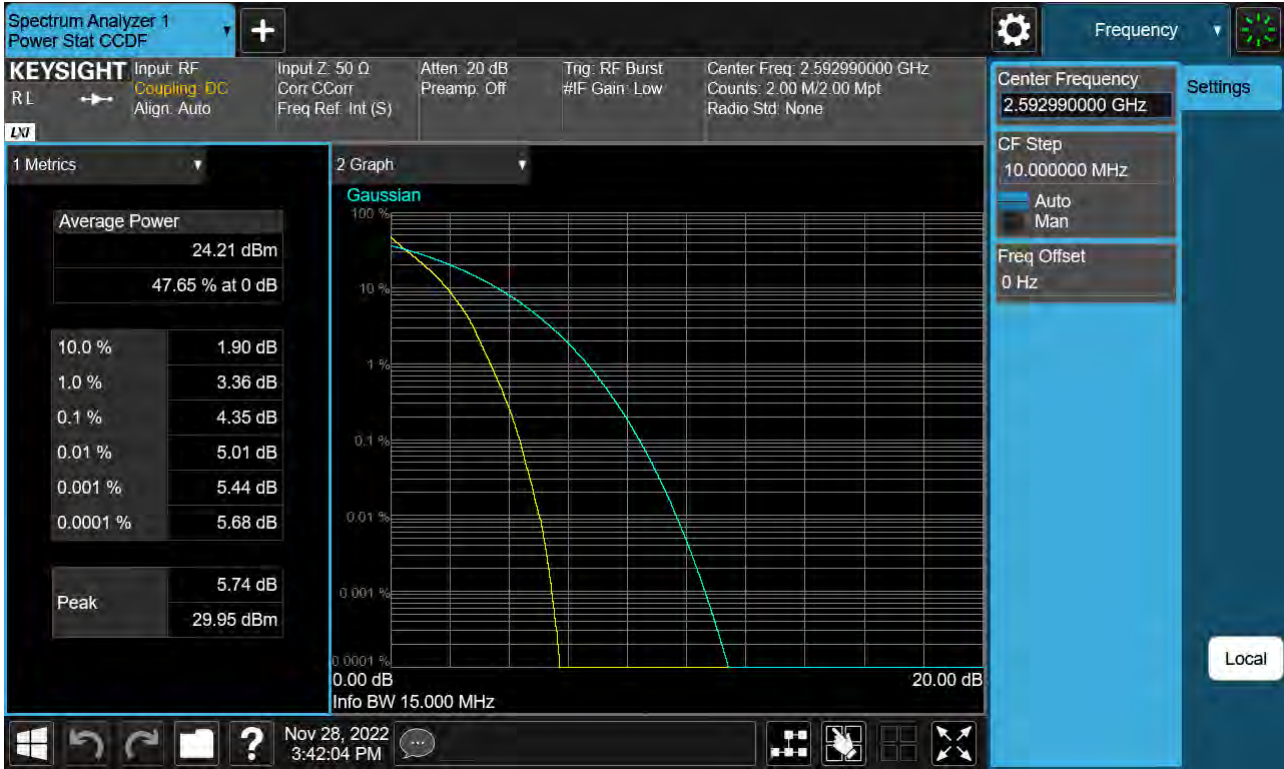

Sub6 n41. PAR Plot (15 M BW_Ch.518598_QPSK)



Sub6 n41. PAR Plot (15 M BW_Ch.518598_16QAM)




Sub6 n41. PAR Plot (15 M BW_Ch.518598_64QAM)



Sub6 n41. PAR Plot (15 M BW_Ch.518598_256QAM)




Sub6 n41. PAR Plot (20 M BW_Ch.518598_BPSK)

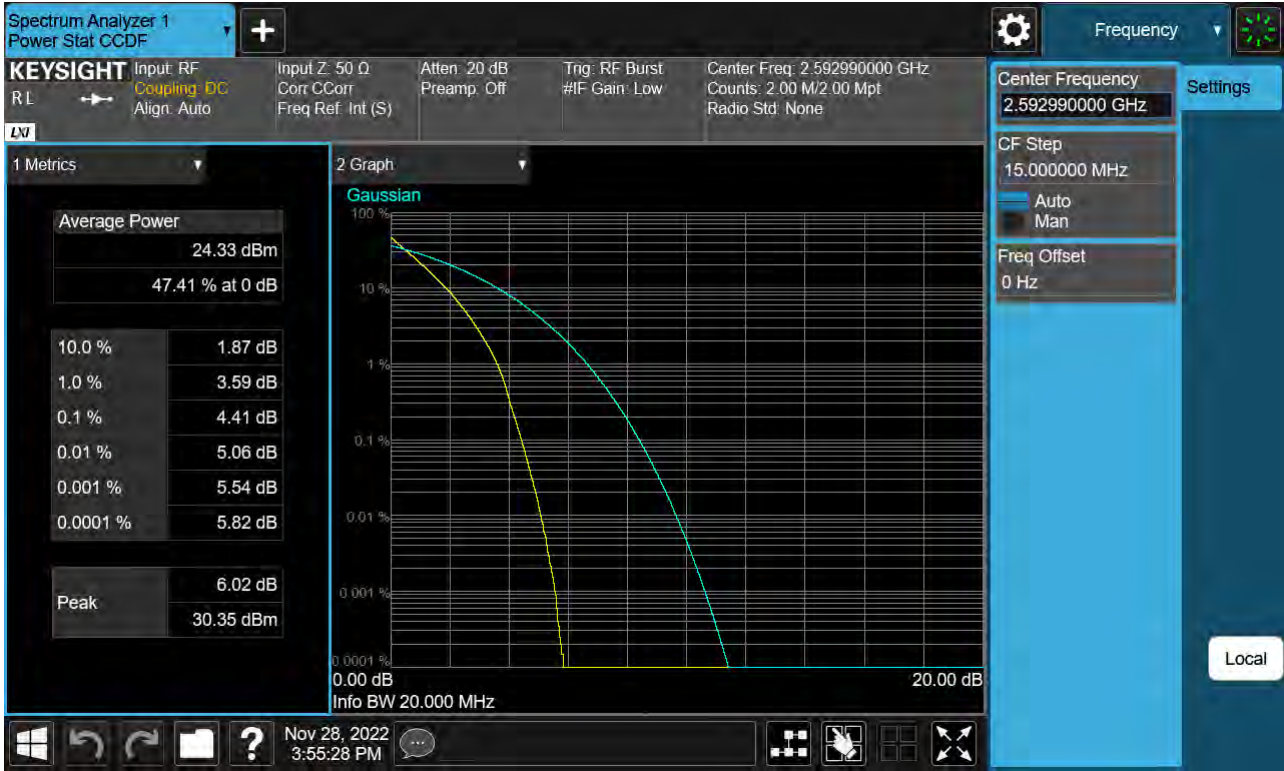

Sub6 n41. PAR Plot (20 M BW_Ch.518598_QPSK)



Sub6 n41. PAR Plot (20 M BW_Ch.518598_16QAM)

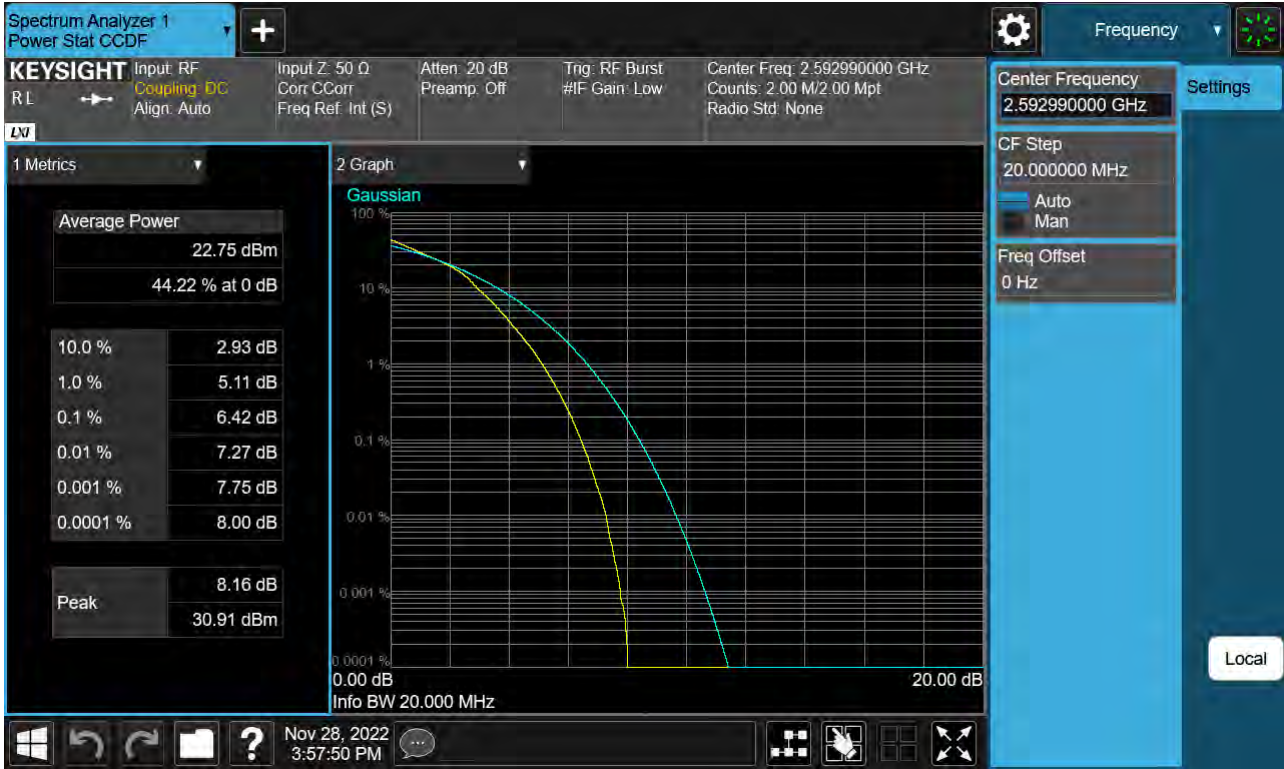


Sub6 n41. PAR Plot (20 M BW_Ch.518598_64QAM)




Sub6 n41. PAR Plot (20 M BW_Ch.518598_256QAM)




Sub6 n41. PAR Plot (30 M BW_Ch.518598_BPSK)

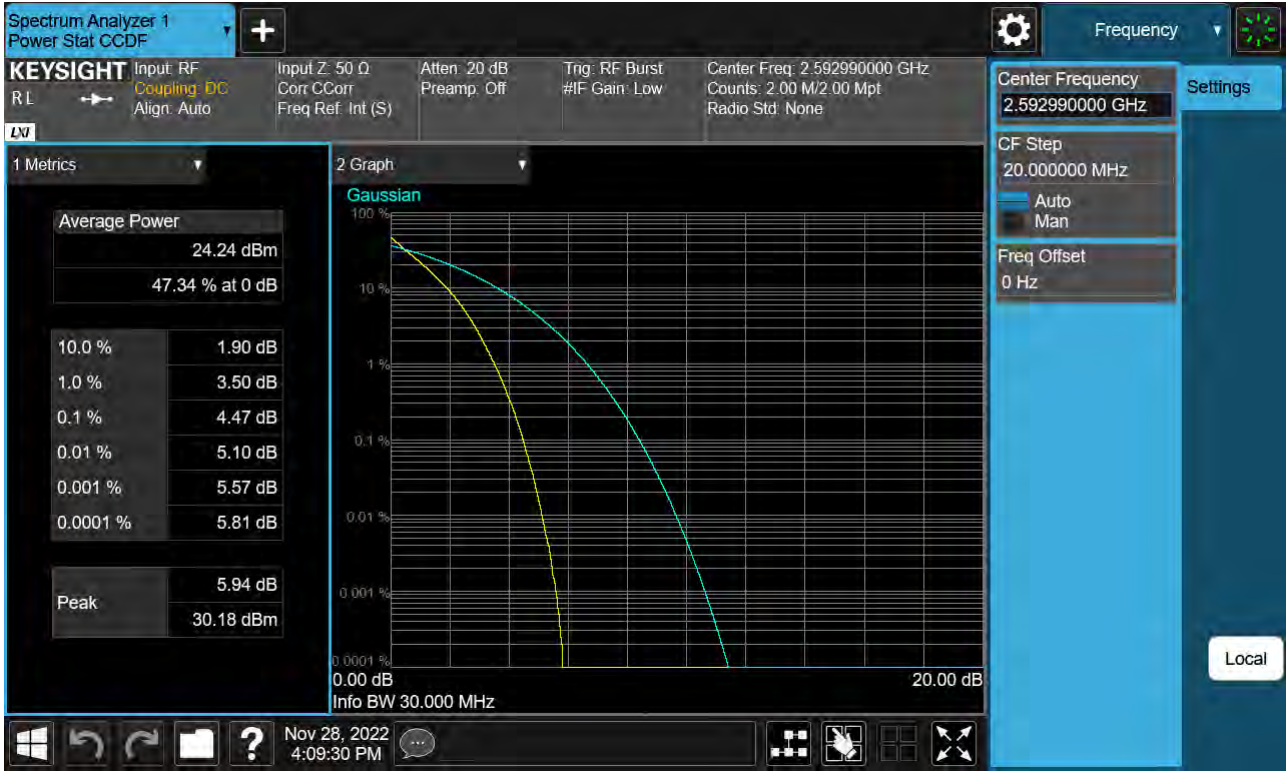


Sub6 n41. PAR Plot (30 M BW_Ch.518598_QPSK)

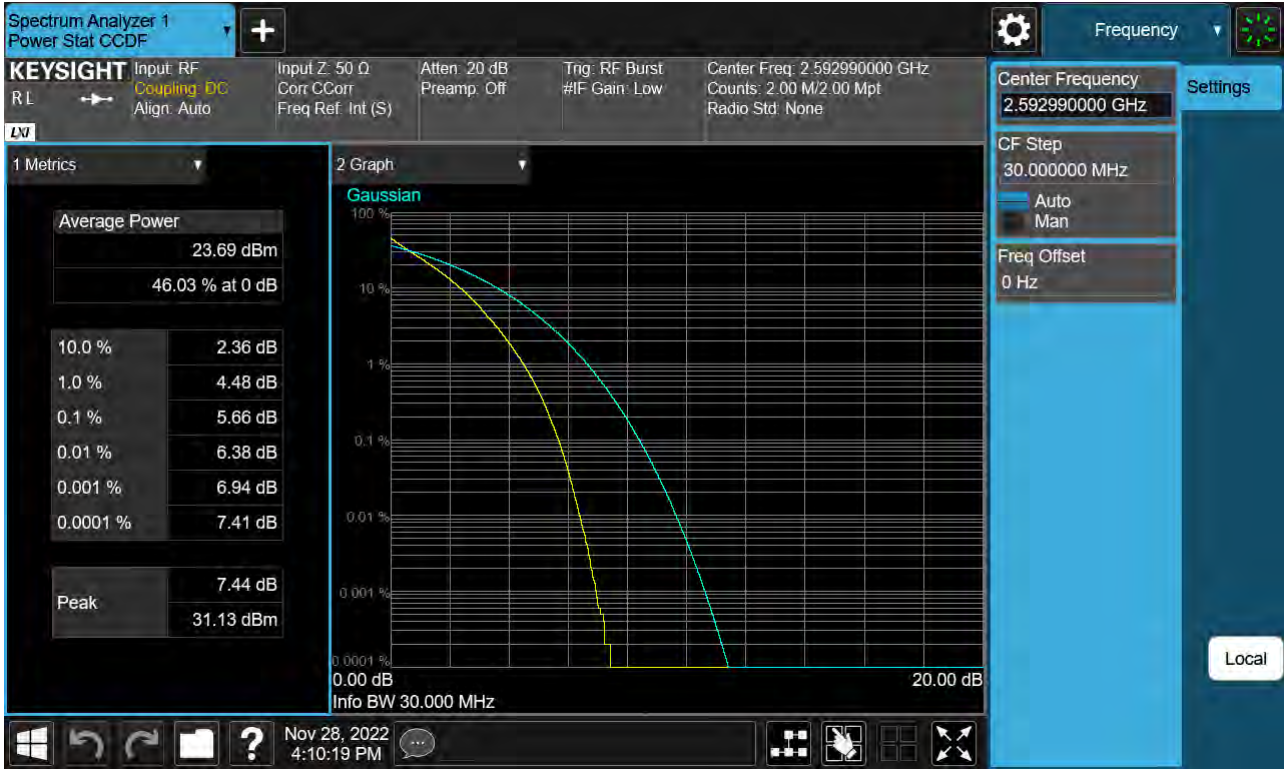


Sub6 n41. PAR Plot (30 M BW_Ch.518598_16QAM)

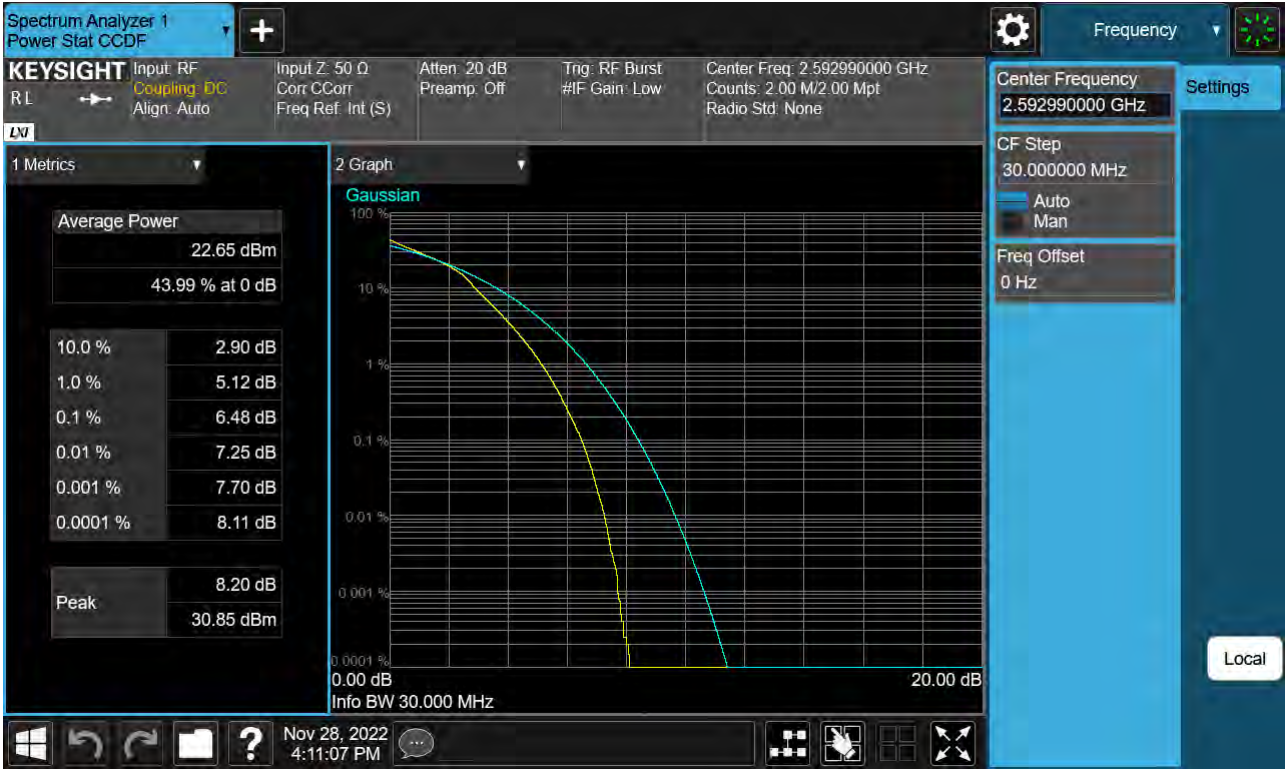

Sub6 n41. PAR Plot (30 M BW_Ch.518598_64QAM)

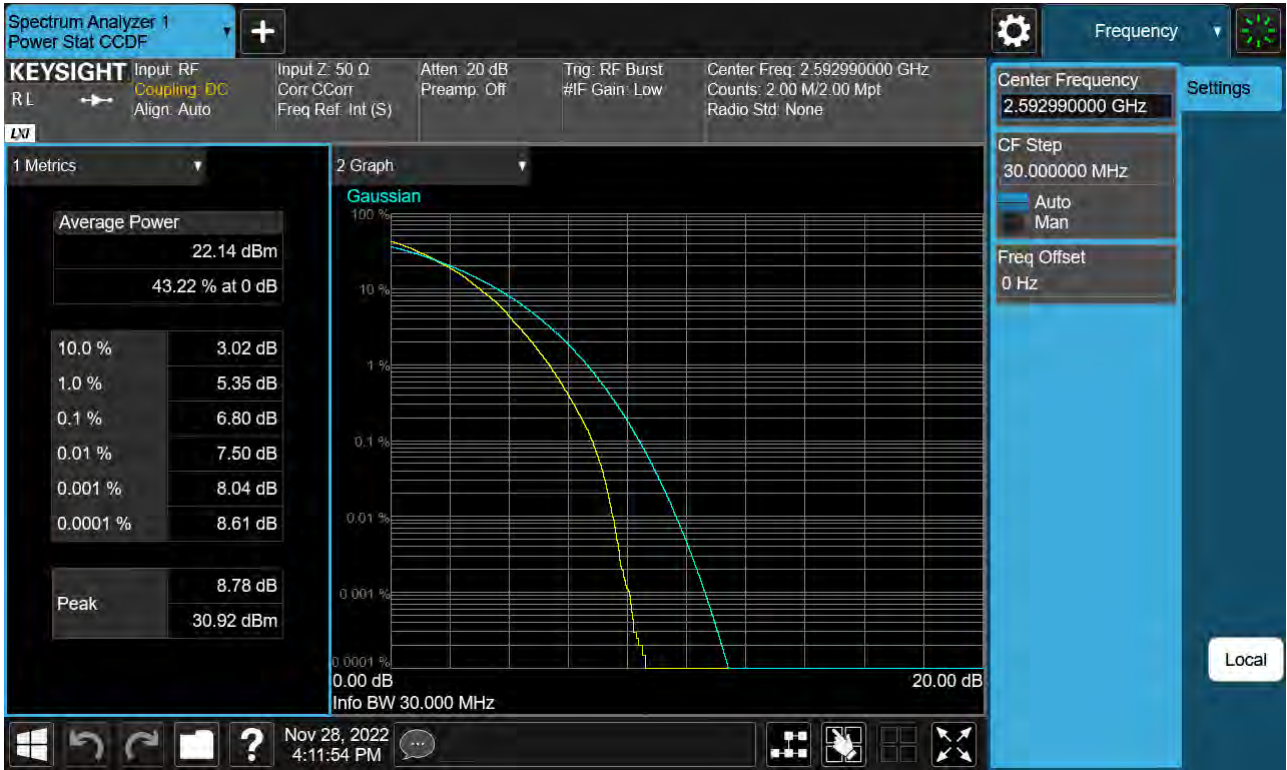

Sub6 n41. PAR Plot (30 M BW_Ch.518598_256QAM)

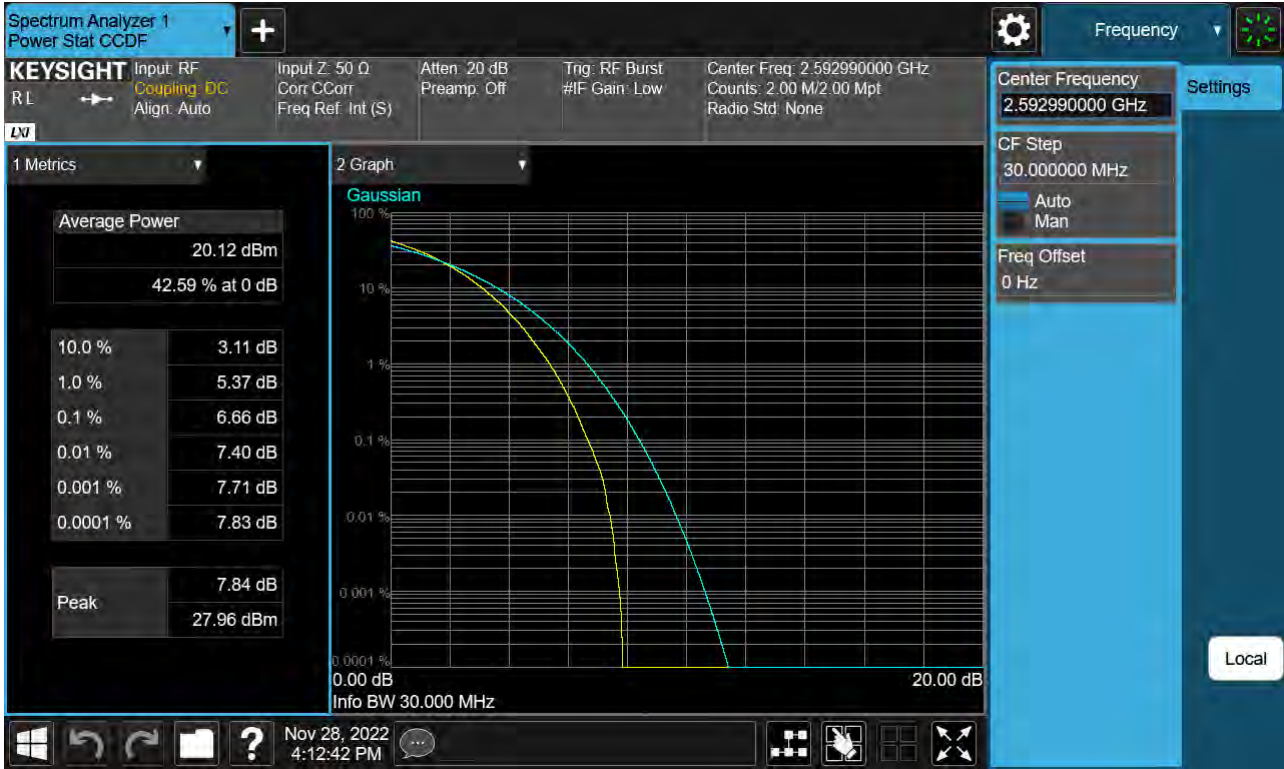

Sub6 n41. PAR Plot (40 M BW_Ch.518598_BPSK)




Sub6 n41. PAR Plot (40 M BW_Ch.518598_QPSK)



Sub6 n41. PAR Plot (40 M BW_Ch.518598_16QAM)



Sub6 n41. PAR Plot (40 M BW_Ch.518598_64QAM)

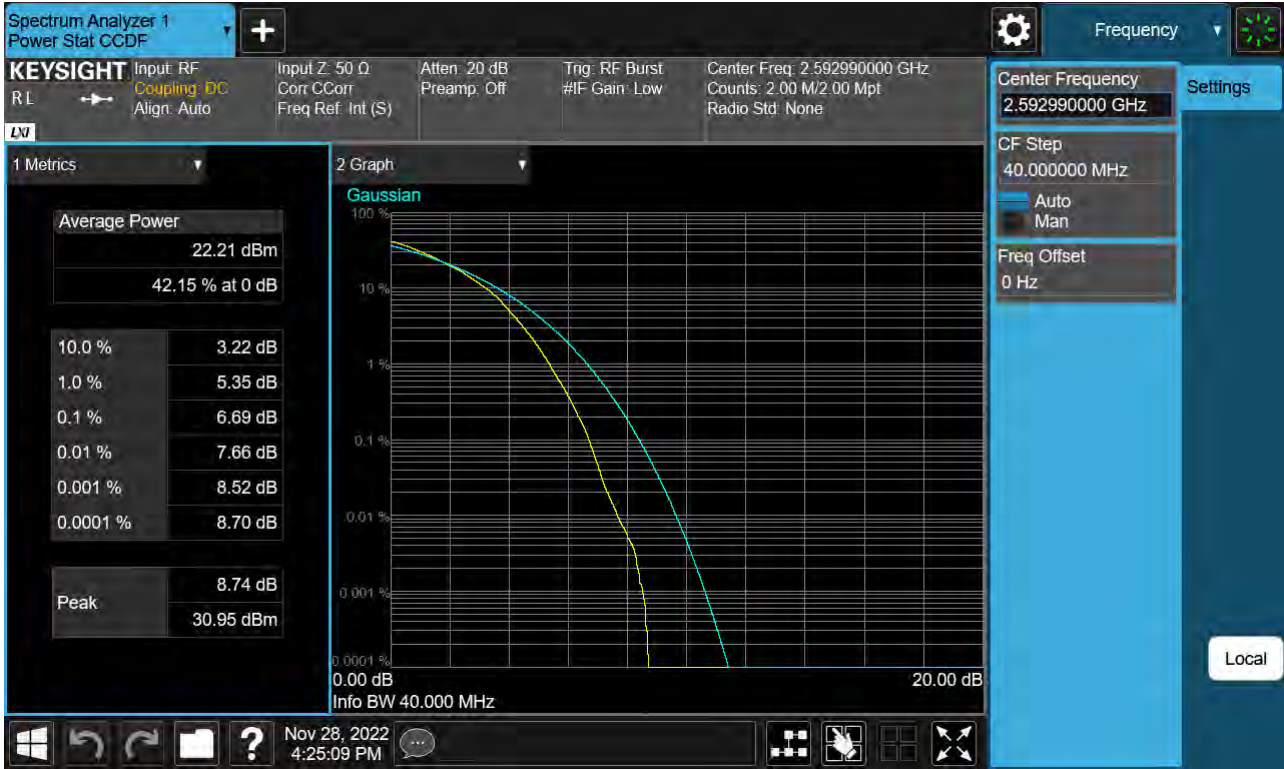


Sub6 n41. PAR Plot (40 M BW_Ch.518598_256QAM)




Sub6 n41. PAR Plot (50 M BW_Ch.518598_BPSK)



Sub6 n41. PAR Plot (50 M BW_Ch.518598_QPSK)

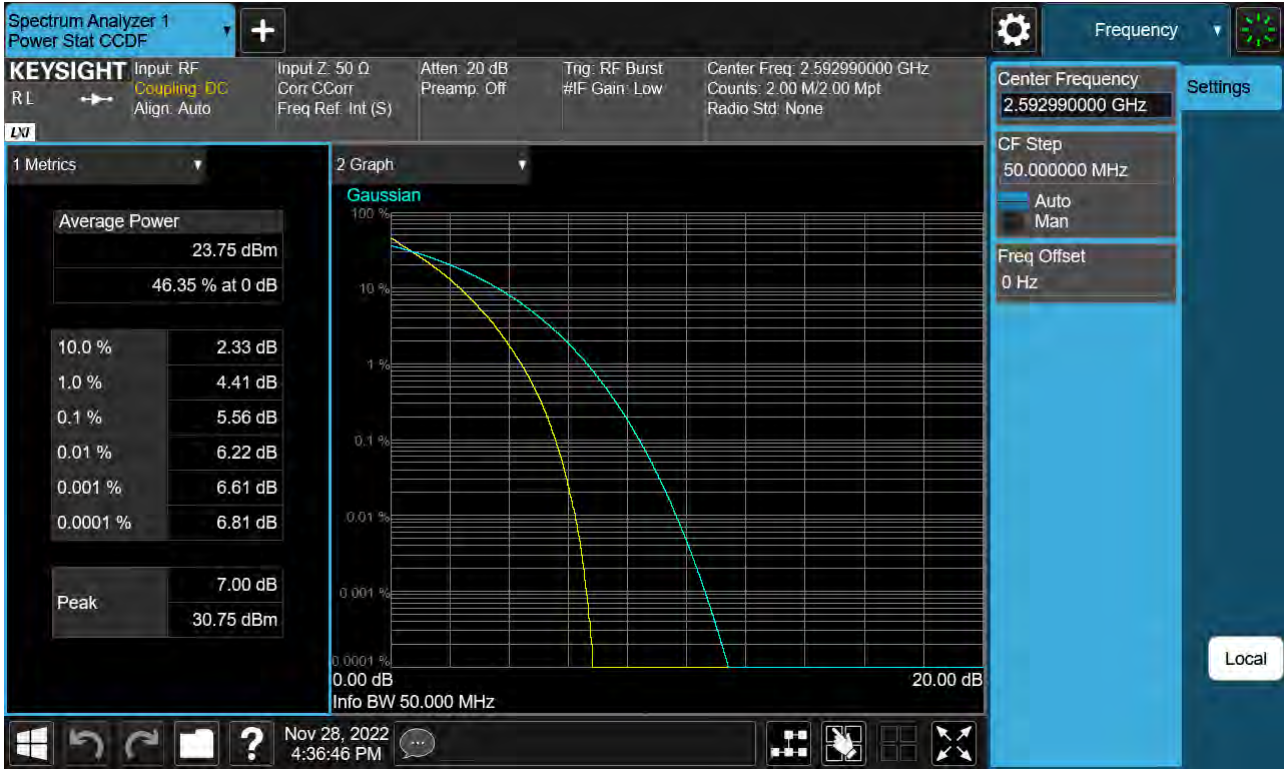

Sub6 n41. PAR Plot (50 M BW_Ch.518598_16QAM)

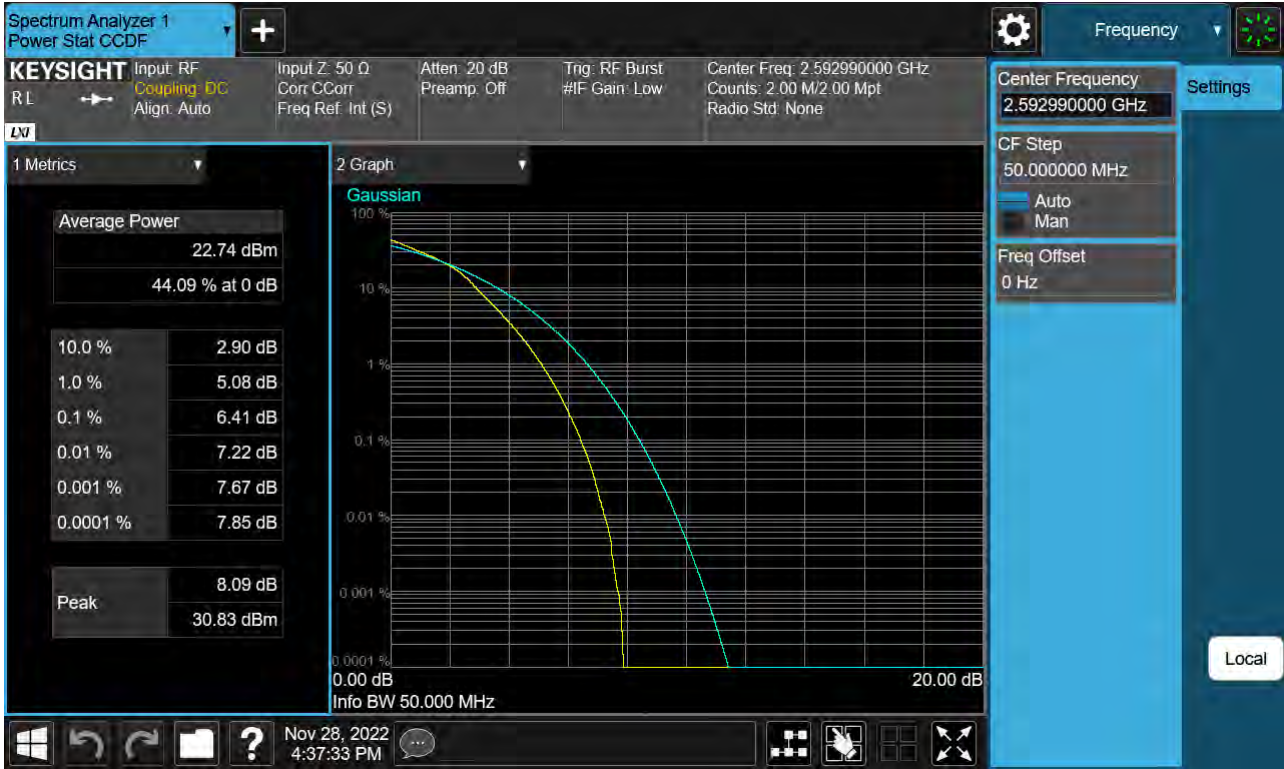


Sub6 n41. PAR Plot (50 M BW_Ch.518598_64QAM)




Sub6 n41. PAR Plot (50 M BW_Ch.518598_256QAM)



Sub6 n41. PAR Plot (60 M BW_Ch.518598_BPSK)

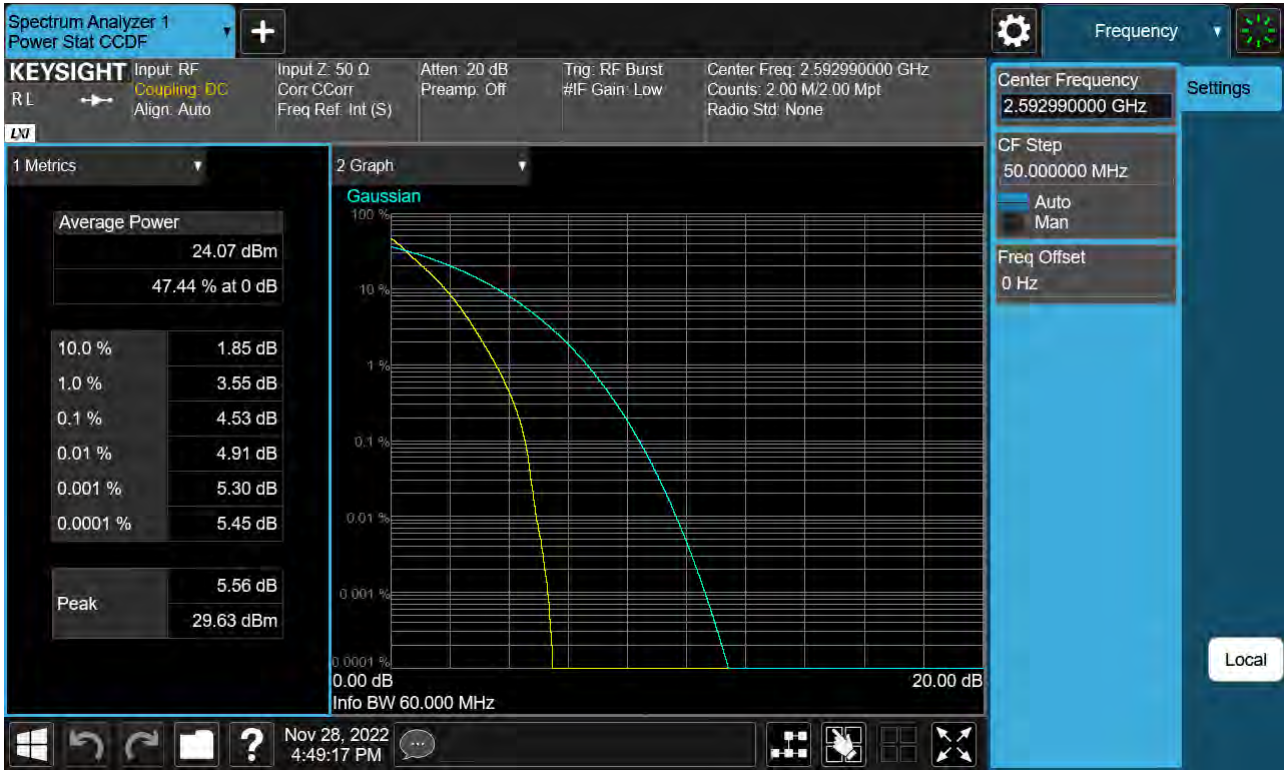

Sub6 n41. PAR Plot (60 M BW_Ch.518598_QPSK)

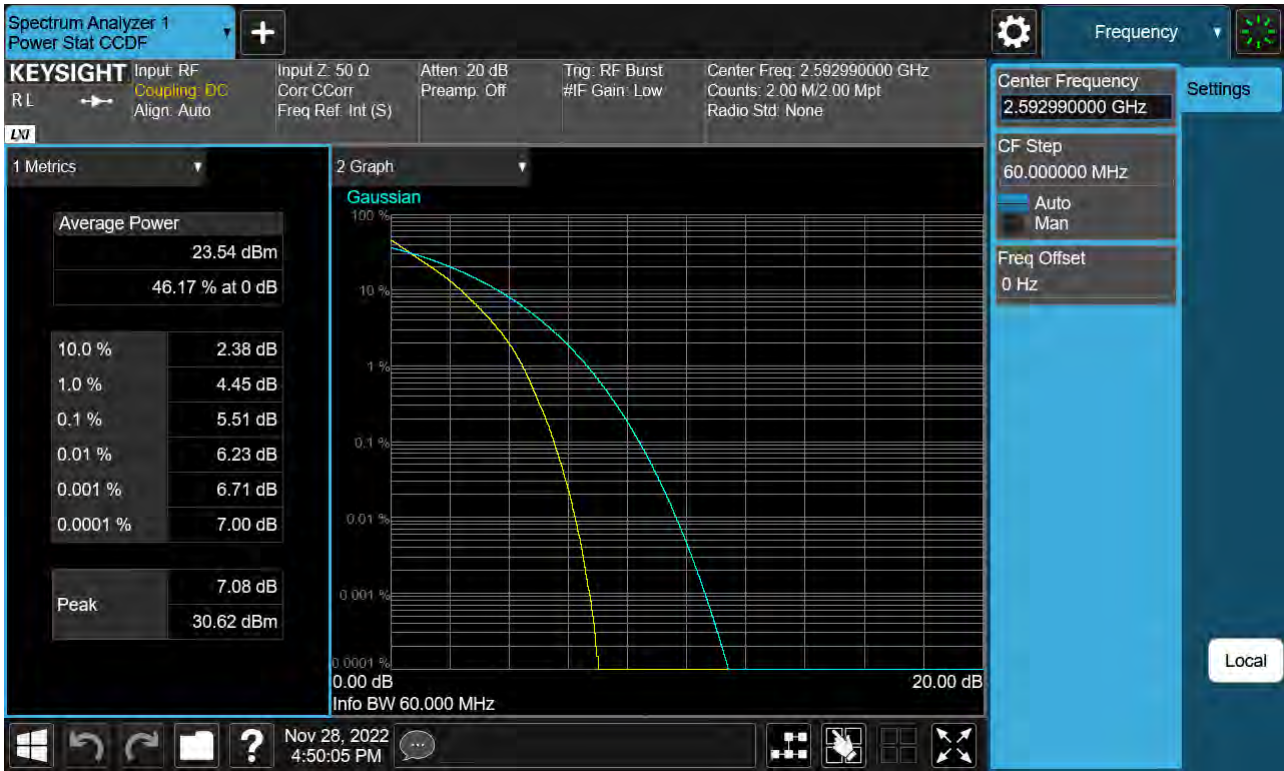

Sub6 n41. PAR Plot (60 M BW_Ch.518598_16QAM)




Sub6 n41. PAR Plot (60 M BW_Ch.518598_64QAM)




Sub6 n41. PAR Plot (60 M BW_Ch.518598_256QAM)




Sub6 n41. PAR Plot (70 M BW_Ch.518598_BPSK)

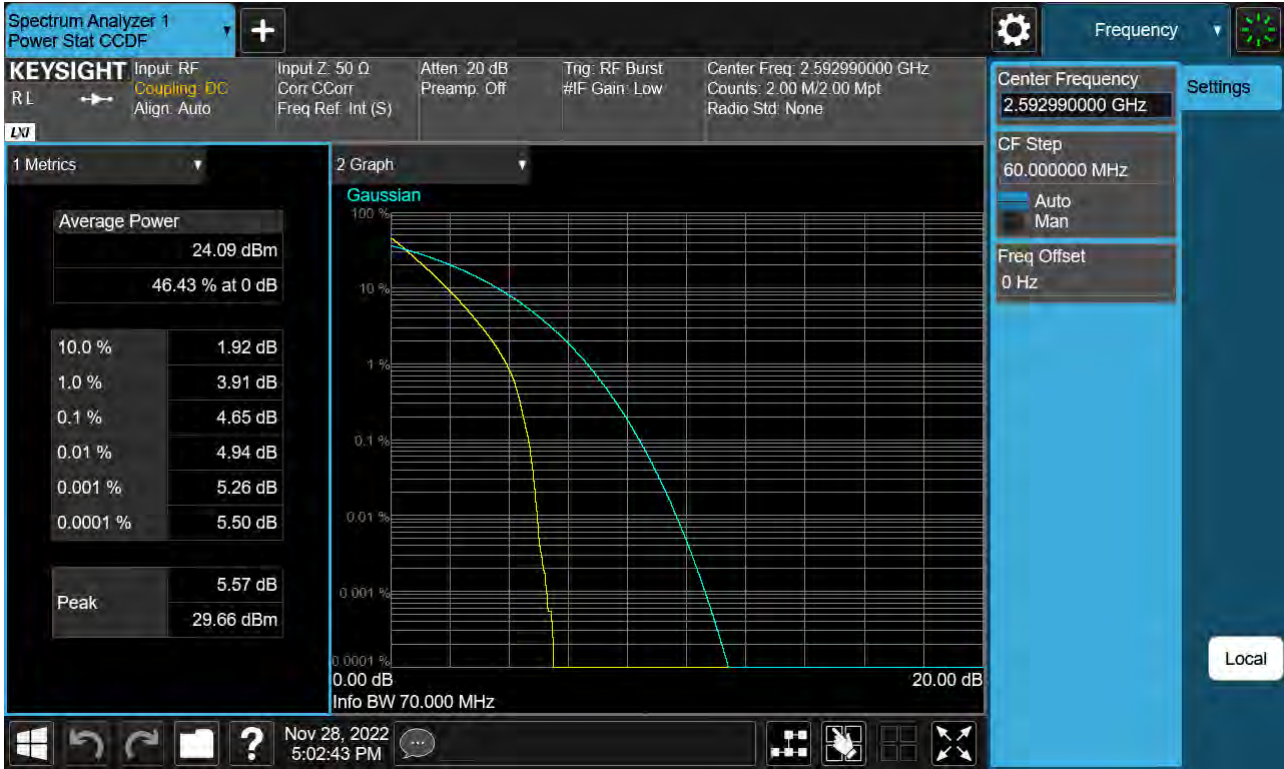


Sub6 n41. PAR Plot (70 M BW_Ch.518598_QPSK)

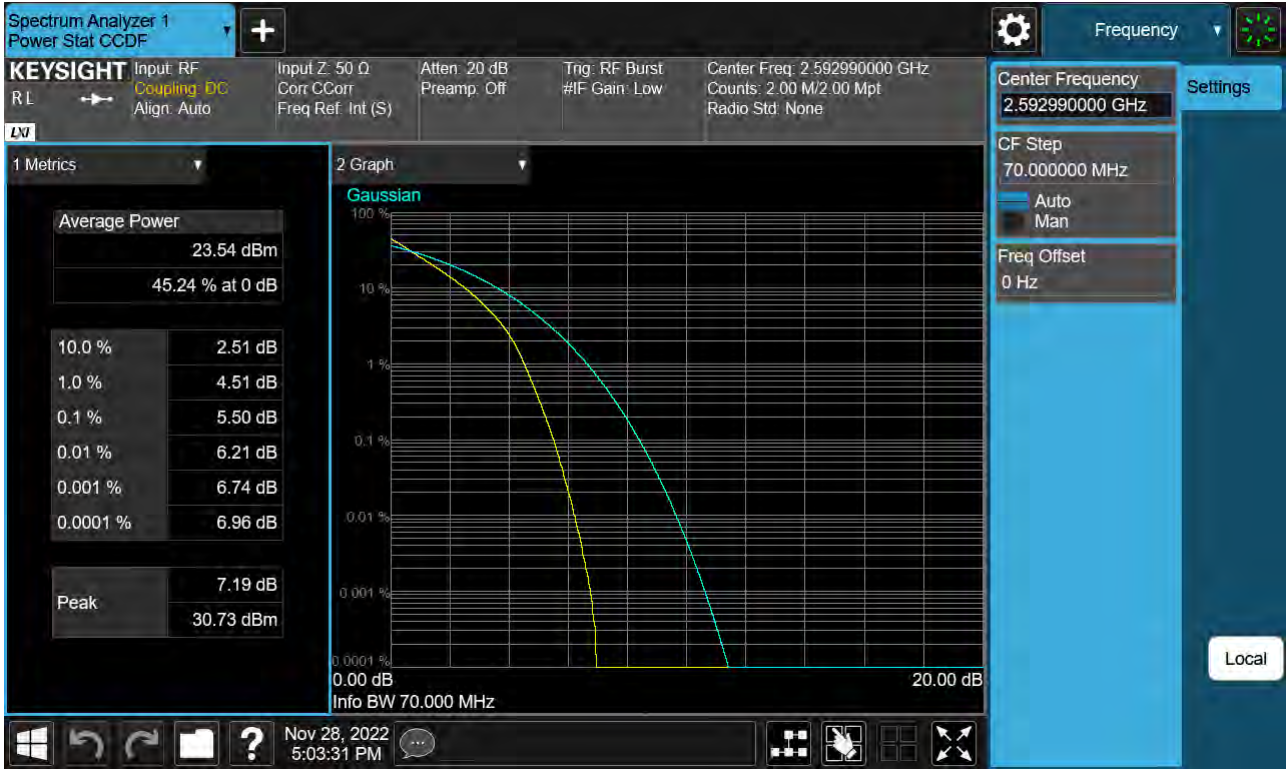

Sub6 n41. PAR Plot (70 M BW_Ch.518598_16QAM)

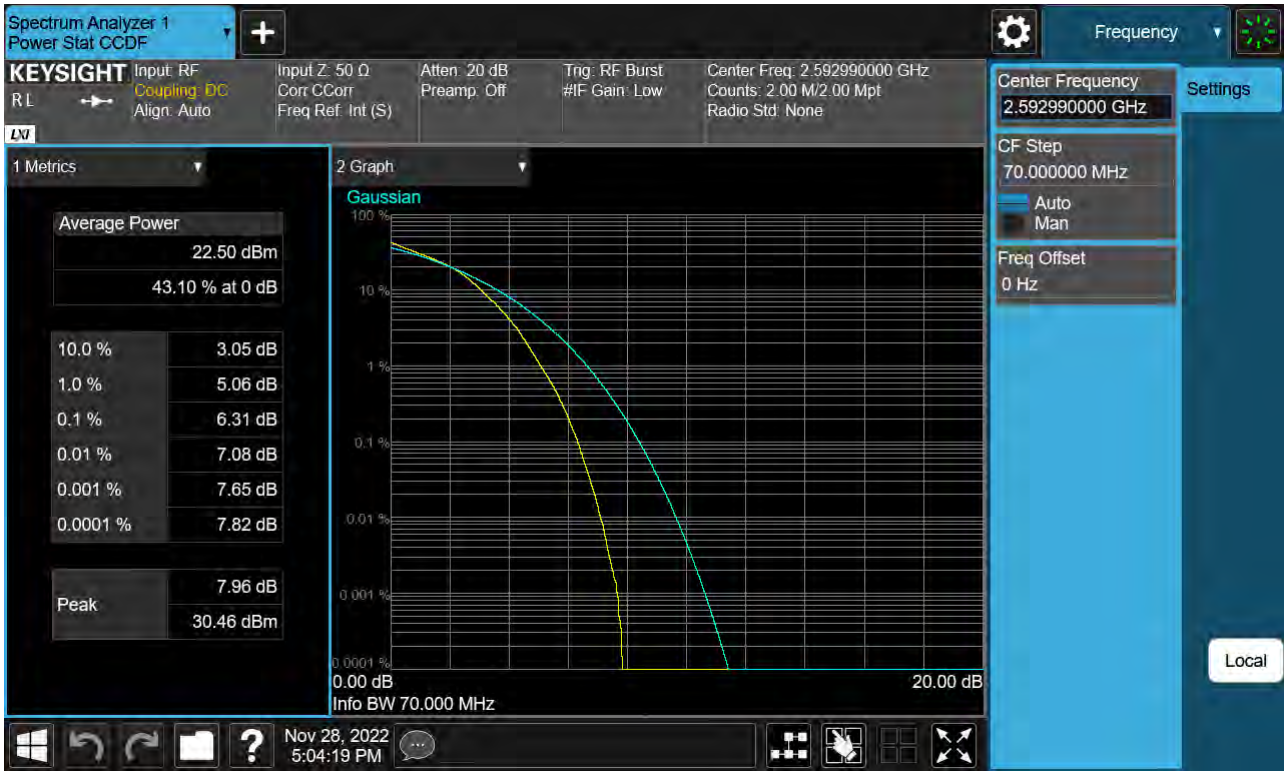

Sub6 n41. PAR Plot (70 M BW_Ch.518598_64QAM)

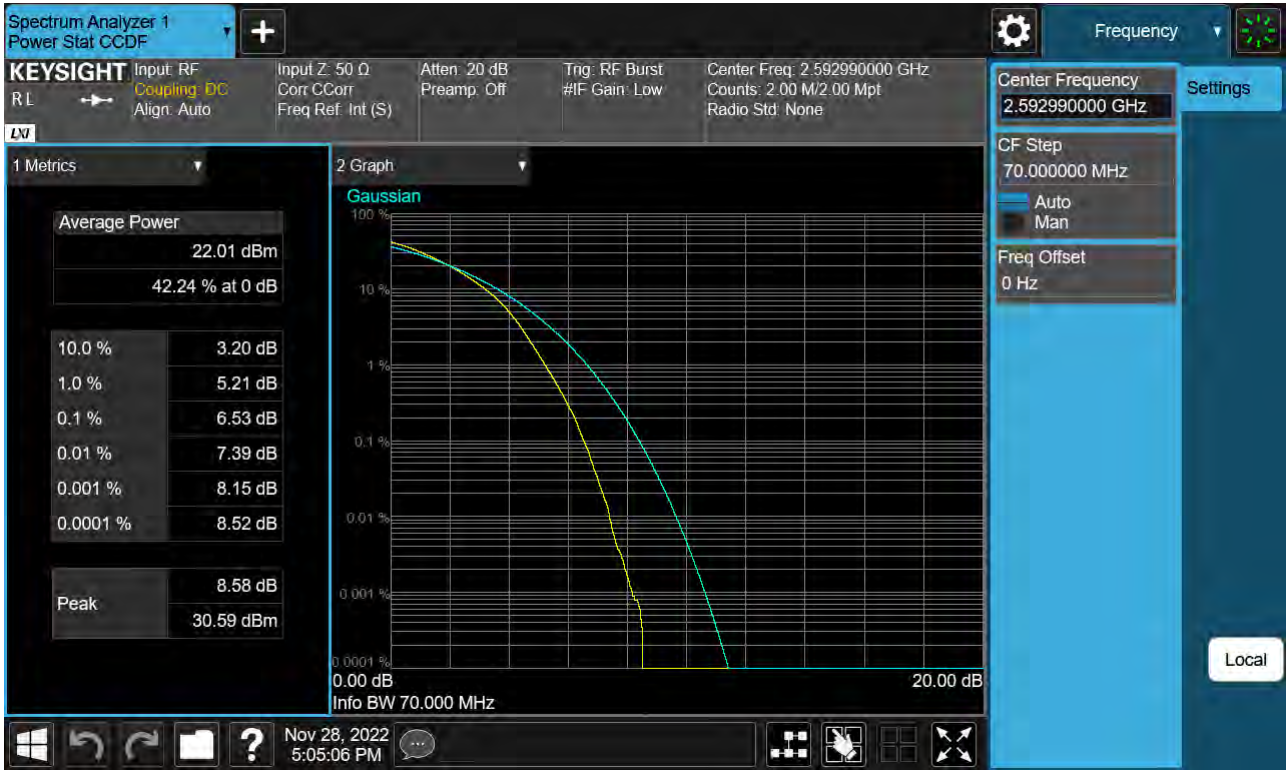

Sub6 n41. PAR Plot (70 M BW_Ch.518598_256QAM)

