

# FCC LTE REPORT

## Certification

**Applicant Name:**

SAMSUNG Electronics Co., Ltd.

**Date of Issue:**

December 21, 2023

**Address:**

129, Samsung-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Location:**

HCT CO., LTD.,  
 74, Seoicheon-ro 578beon-gil, Majang-myeon,  
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-RF-2312-FC018

**FCC ID:** A3LSMM156B

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

Model(s): SM-M156B/DSN  
 EUT Type: Mobile phone  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 FCC Rule Part(s): §27

**Main 2 Ant**

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	1M10G7D	QPSK	0.186	22.69
		1M09W7D	16QAM	0.141	21.48
		1M10W7D	64QAM	0.110	20.41
		1M09W7D	256QAM	0.063	18.00
LTE – Band4 (3)	1711.5 – 1753.5	2M71G7D	QPSK	0.187	22.72
		2M70W7D	16QAM	0.141	21.48
		2M70W7D	64QAM	0.110	20.41
		2M70W7D	256QAM	0.063	17.99
LTE – Band4 (5)	1712.5 – 1752.5	4M50G7D	QPSK	0.189	22.76
		4M49W7D	16QAM	0.144	21.57
		4M52W7D	64QAM	0.111	20.46
		4M51W7D	256QAM	0.064	18.03
LTE – Band4 (10)	1715.0 – 1750.0	8M99G7D	QPSK	0.189	22.76
		9M00W7D	16QAM	0.144	21.57
		9M00W7D	64QAM	0.112	20.51
		8M99W7D	256QAM	0.064	18.06
LTE – Band4 (15)	1717.5 – 1747.5	13M5G7D	QPSK	0.187	22.73
		13M5W7D	16QAM	0.142	21.53
		13M5W7D	64QAM	0.111	20.45
		13M4W7D	256QAM	0.063	17.99
LTE – Band4 (20)	1720.0 – 1745.0	18M0G7D	QPSK	0.185	22.66
		17M9W7D	16QAM	0.140	21.47
		18M0W7D	64QAM	0.110	20.40
		17M9W7D	256QAM	0.062	17.94

**Main 3 Ant**

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	1M10G7D	QPSK	0.084	19.24
		1M09W7D	16QAM	0.064	18.05
		1M10W7D	64QAM	0.049	16.94
		1M09W7D	256QAM	0.028	14.49
LTE – Band4 (3)	1711.5 – 1753.5	2M71G7D	QPSK	0.084	19.24
		2M70W7D	16QAM	0.064	18.04
		2M70W7D	64QAM	0.050	16.95
		2M70W7D	256QAM	0.028	14.47
LTE – Band4 (5)	1712.5 – 1752.5	4M51G7D	QPSK	0.085	19.28
		4M50W7D	16QAM	0.064	18.09
		4M49W7D	64QAM	0.050	16.98
		4M50W7D	256QAM	0.028	14.51
LTE – Band4 (10)	1715.0 – 1750.0	8M98G7D	QPSK	0.084	19.25
		8M98W7D	16QAM	0.064	18.06
		8M98W7D	64QAM	0.050	16.98
		8M98W7D	256QAM	0.028	14.50
LTE – Band4 (15)	1717.5 – 1747.5	13M5G7D	QPSK	0.085	19.27
		13M5W7D	16QAM	0.064	18.05
		13M5W7D	64QAM	0.050	16.96
		13M5W7D	256QAM	0.028	14.46
LTE – Band4 (20)	1720.0 – 1745.0	18M0G7D	QPSK	0.083	19.21
		17M9W7D	16QAM	0.063	18.00
		17M9W7D	64QAM	0.050	16.95
		18M0W7D	256QAM	0.028	14.43

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

Report No.: HCT-RF-2312-FC018

---

REVIEWED BY



---

Report prepared by : Seok Hyun Kim  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.  
This test results were applied only to the test methods required by the standard.

Test Report Statement:

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

The report shall not be reproduced except in full(only partly) without approval of the laboratory.

# Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2312-FC018	December 21, 2023	- First Approval Report

## Table of Contents

REVIEWED BY .....	3
1. GENERAL INFORMATION .....	6
2. INTRODUCTION .....	7
2.1. DESCRIPTION OF EUT .....	7
2.2. MEASURING INSTRUMENT CALIBRATION .....	7
2.3. TEST FACILITY .....	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE .....	8
3.2 RADIATED POWER.....	9
3.3 RADIATED SPURIOUS EMISSIONS .....	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH. ....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	14
3.7 BAND EDGE .....	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	17
3.9 WORST CASE(RADIATED TEST) .....	18
3.10 WORST CASE(CONDUCTED TEST) .....	20
4. LIST OF TEST EQUIPMENT .....	21
5. MEASUREMENT UNCERTAINTY .....	22
6. SUMMARY OF TEST RESULTS .....	23
7. SAMPLE CALCULATION .....	24
8. TEST DATA (Main 2 Ant).....	26
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	26
8.2 RADIATED SPURIOUS EMISSIONS .....	29
8.3 PEAK-TO-AVERAGE RATIO.....	30
8.4 OCCUPIED BANDWIDTH .....	31
8.5 CONDUCTED SPURIOUS EMISSIONS .....	32
8.6 BAND EDGE .....	33
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	34
9. TEST DATA (Main 3 Ant).....	52
9.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	52
9.2 RADIATED SPURIOUS EMISSIONS .....	55
9.3 PEAK-TO-AVERAGE RATIO.....	56
9.4 OCCUPIED BANDWIDTH .....	57
9.5 CONDUCTED SPURIOUS EMISSIONS .....	58
9.6 BAND EDGE .....	59
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	60
10. TEST PLOTS (Main 2 Ant) .....	78
11. TEST PLOTS (Main 3 Ant) .....	199
12. ANNEX A_ TEST SETUP PHOTO.....	320

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMM156B
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§27
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-M156B/DSN
<b>Tx Frequency:</b>	1710.7 MHz – 1754.3 MHz (LTE – Band 4 (1.4 MHz)) 1711.5 MHz – 1753.5 MHz (LTE – Band 4 (3 MHz)) 1712.5 MHz – 1752.5 MHz (LTE – Band 4 (5 MHz)) 1715.0 MHz – 1750.0 MHz (LTE – Band 4 (10 MHz)) 1717.5 MHz – 1747.5 MHz (LTE – Band 4 (15 MHz)) 1720.0 MHz – 1745.0 MHz (LTE – Band 4 (20 MHz))
<b>Date(s) of Tests:</b>	December 06, 2023 ~ December 18, 2023
<b>Serial number:</b>	Radiated: R3CWB0E8S8B(Main 2 Ant), R3CWB0E8BEY(Main 3 Ant) Conducted: R3CWB0E8ATM(Main 2 Ant), R3CWA0QSYXJ(Main 3 Ant)

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac (20/40/80 MHz), Bluetooth, BT LE, NFC, iPA.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12



## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $>$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15 \text{ dB}$$

### 3.4 PEAK- TO- AVERAGE RATIO

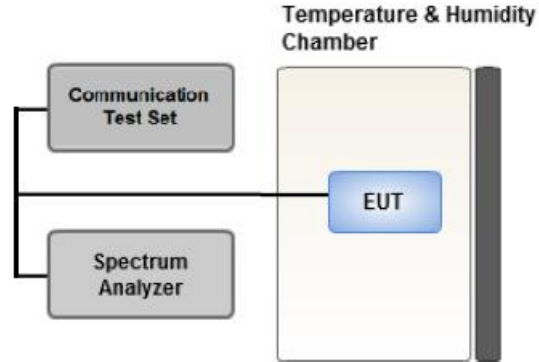

**Test setup**

#### ① CCDF Procedure for PAPR

##### **Test Settings**

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

**② Alternate Procedure for PAPR**

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

**Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

**Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$  for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6$  dB if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

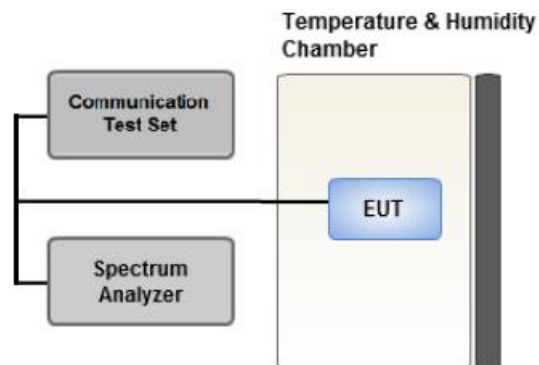

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

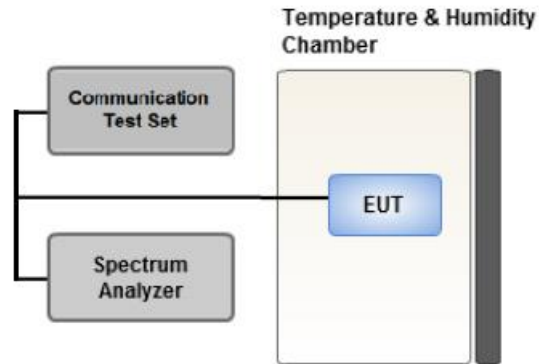

**Test setup**

#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 BAND EDGE

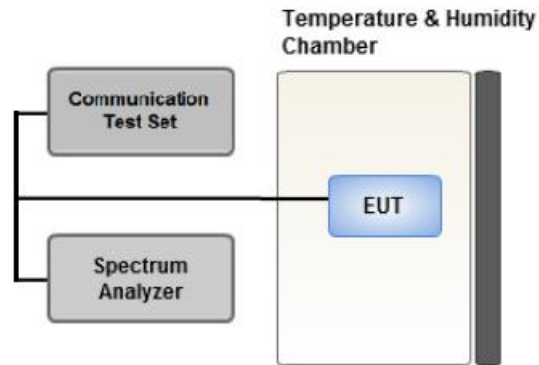

**Test setup**

#### **Test Overview**

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

**Test Notes**

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz} / \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.



### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

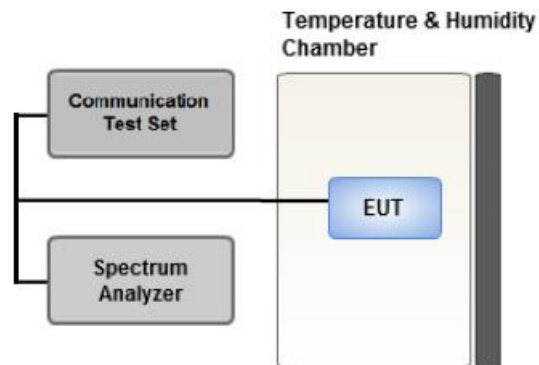

#### Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at

least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.9 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)  
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.  
 Mode : Stand alone, Simultaneous transmission scenarios  
 Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation was investigated and the worst case bandwidth results are reported. (Worst case : 10 MHz(Main 2 Ant), 5 MHz(Main 3 Ant))
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.

[ Main 2 Ant Worst case ]

Test Description	Modulation	Bandwidth (MHz)	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1.4	1	5	X
		3	1	14	
		5	1	24	
		10	1	49	
		15	1	74	
		20	1	99	
Radiated Spurious and Harmonic Emissions	QPSK	10	1	49	Y

[ Main 3 Ant Worst case ]

Test Description	Modulation	Bandwidth (MHz)	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1.4	1	5	X
		3	1	14	
		5	1	24	
		10	1	49	
		15	1	74	
		20	1	99	
Radiated Spurious and Harmonic Emissions	QPSK	5	1	24	Y

### 3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
				1.4, 3, 5, 10, 15, 20	Low, High
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	FBSR-02B(1.2G HPF+LNA)	T&M SYSTEM	F1L1	01/19/2024	Annual
RF Switching System	FBSR-02B(3.3G HPF+LNA)	T&M SYSTEM	F1L2	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/23/2024	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/17/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/17/2024	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.16 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.57 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<b><u>See Note1</u></b>
Peak- to- Average Ratio	§27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 27.54	Emission must remain in band	PASS

**Note:**

1. See SAR Report

### 6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

**ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
132322	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

**EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.



### 7.3. Emission Designator

#### GSM Emission Designator

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

### 8. TEST DATA (Main 2 Ant)

#### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1710.7	LTE B4 1.4 MHz	QPSK	-19.85	13.88	9.94	2.24	H	< 1.00	0.144	21.58
		16-QAM	-21.07	12.66	9.94	2.24	H		0.109	20.36
		64-QAM	-22.16	11.57	9.94	2.24	H		0.085	19.27
		256-QAM	-24.60	9.13	9.94	2.24	H		0.048	16.83
1732.5		QPSK	-19.20	14.49	10.07	2.17	H		0.173	22.39
		16-QAM	-20.40	13.29	10.07	2.17	H		0.132	21.19
		64-QAM	-21.48	12.21	10.07	2.17	H		0.103	20.11
		256-QAM	-23.88	9.81	10.07	2.17	H		0.059	17.71
1754.3		QPSK	-19.00	14.68	10.18	2.17	H		0.186	22.69
		16-QAM	-20.21	13.47	10.18	2.17	H		0.141	21.48
		64-QAM	-21.28	12.40	10.18	2.17	H		0.110	20.41
		256-QAM	-23.69	9.99	10.18	2.17	H		0.063	18.00

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1711.5	LTE B4 3 MHz	QPSK	-19.70	14.03	9.94	2.24	H	< 1.00	0.149	21.73
		16-QAM	-20.93	12.80	9.94	2.24	H		0.112	20.50
		64-QAM	-22.01	11.72	9.94	2.24	H		0.087	19.42
		256-QAM	-24.48	9.25	9.94	2.24	H		0.050	16.95
1732.5		QPSK	-19.18	14.51	10.07	2.17	H		0.174	22.41
		16-QAM	-20.42	13.27	10.07	2.17	H		0.131	21.17
		64-QAM	-21.48	12.21	10.07	2.17	H		0.103	20.11
		256-QAM	-23.93	9.76	10.07	2.17	H		0.058	17.66
1753.5		QPSK	-18.97	14.71	10.18	2.17	H		0.187	22.72
		16-QAM	-20.21	13.47	10.18	2.17	H		0.141	21.48
		64-QAM	-21.28	12.40	10.18	2.17	H		0.110	20.41
		256-QAM	-23.70	9.98	10.18	2.17	H		0.063	17.99

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1712.5	LTE B4 5 MHz	QPSK	-19.58	14.15	9.94	2.24	H	< 1.00	0.153	21.85
		16-QAM	-20.77	12.96	9.94	2.24	H		0.116	20.66
		64-QAM	-21.89	11.84	9.94	2.24	H		0.090	19.54
		256-QAM	-24.32	9.41	9.94	2.24	H		0.051	17.11
1732.5		QPSK	-19.18	14.51	10.07	2.17	H		0.174	22.41
		16-QAM	-20.38	13.31	10.07	2.17	H		0.132	21.21
		64-QAM	-21.45	12.24	10.07	2.17	H		0.103	20.14
		256-QAM	-23.89	9.80	10.07	2.17	H		0.059	17.70
1752.5		QPSK	-18.97	14.74	10.17	2.15	H		0.189	22.76
		16-QAM	-20.16	13.55	10.17	2.15	H		0.144	21.57
		64-QAM	-21.27	12.44	10.17	2.15	H		0.111	20.46
		256-QAM	-23.70	10.01	10.17	2.15	H		0.064	18.03

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1715.0	LTE B4 10 MHz	QPSK	-19.30	14.34	9.98	2.23	H	< 1.00	0.161	22.08
		16-QAM	-20.51	13.13	9.98	2.23	H		0.122	20.87
		64-QAM	-21.61	12.03	9.98	2.23	H		0.095	19.77
		256-QAM	-24.08	9.56	9.98	2.23	H		0.054	17.30
1732.5		QPSK	-19.11	14.58	10.07	2.17	H		0.177	22.48
		16-QAM	-20.28	13.41	10.07	2.17	H		0.135	21.31
		64-QAM	-21.30	12.39	10.07	2.17	H		0.107	20.29
		256-QAM	-23.78	9.91	10.07	2.17	H		0.060	17.81
1750.0		QPSK	-18.97	14.74	10.17	2.15	H		0.189	22.76
		16-QAM	-20.16	13.55	10.17	2.15	H		0.144	21.57
		64-QAM	-21.22	12.49	10.17	2.15	H		0.112	20.51
		256-QAM	-23.67	10.04	10.17	2.15	H		0.064	18.06

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1717.5	LTE B4 15 MHz	QPSK	-19.24	14.40	10.01	2.22	H	< 1.00	0.166	22.19
		16-QAM	-20.44	13.20	10.01	2.22	H		0.126	20.99
		64-QAM	-21.56	12.08	10.01	2.22	H		0.097	19.87
		256-QAM	-24.06	9.58	10.01	2.22	H		0.055	17.37
1732.5		QPSK	-19.08	14.61	10.07	2.17	H		0.178	22.51
		16-QAM	-20.29	13.40	10.07	2.17	H		0.135	21.30
		64-QAM	-21.33	12.36	10.07	2.17	H		0.106	20.26
		256-QAM	-23.78	9.91	10.07	2.17	H		0.060	17.81
1747.5		QPSK	-19.00	14.71	10.17	2.15	H		0.187	22.73
		16-QAM	-20.20	13.51	10.17	2.15	H		0.142	21.53
		64-QAM	-21.28	12.43	10.17	2.15	H		0.111	20.45
		256-QAM	-23.74	9.97	10.17	2.15	H		0.063	17.99

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1720.0	LTE B4 20 MHz	QPSK	-19.18	14.33	10.01	2.22	H	< 1.00	0.163	22.12
		16-QAM	-20.35	13.16	10.01	2.22	H		0.124	20.95
		64-QAM	-21.47	12.04	10.01	2.22	H		0.096	19.83
		256-QAM	-23.97	9.54	10.01	2.22	H		0.054	17.33
1732.5		QPSK	-19.11	14.58	10.07	2.17	H		0.177	22.48
		16-QAM	-20.27	13.42	10.07	2.17	H		0.136	21.32
		64-QAM	-21.34	12.35	10.07	2.17	H		0.106	20.25
		256-QAM	-23.80	9.89	10.07	2.17	H		0.060	17.79
1745.0		QPSK	-19.02	14.66	10.15	2.15	H		0.185	22.66
		16-QAM	-20.21	13.47	10.15	2.15	H		0.140	21.47
		64-QAM	-21.28	12.40	10.15	2.15	H		0.110	20.40
		256-QAM	-23.74	9.94	10.15	2.15	H		0.062	17.94

### 8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 1750.0 MHz
- ▣ MEASURED OUTPUT POWER: 22.76 dBm = 0.189 W
- ▣ MODE: LTE B4
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  35.76 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20000 (1715.0)	3 430.00	-51.89	12.42	-58.34	3.09	H	-49.01	71.76
	5 145.00	-48.64	12.37	-46.26	3.88	V	-37.77	60.52
	6 860.00	-45.07	11.87	-38.18	4.49	H	-30.80	53.56
	8 575.00	-44.25	11.38	-31.44	5.01	H	-25.07	47.83
	10 290.00	-55.67	11.54	-37.99	5.58	V	-32.03	54.78
20175 (1732.5)	3 465.00	-41.87	12.35	-48.51	3.11	H	-39.27	62.03
	5 197.50	-48.52	12.63	-47.44	3.86	H	-38.67	61.43
	6 930.00	-44.54	11.65	-37.41	4.52	H	-30.28	53.03
	8 662.50	-43.86	11.06	-30.43	5.04	H	-24.41	47.16
	10 395.00	-54.94	11.38	-37.47	5.68	H	-31.76	54.52
20350 (1750.0)	3 500.00	-51.51	12.34	-57.63	3.10	H	-48.39	71.15
	5 250.00	-47.97	12.93	-47.39	3.89	V	-38.35	61.11
	7 000.00	-43.60	11.31	-35.34	4.57	H	-28.60	51.35
	8 750.00	-45.03	10.83	-30.72	5.09	H	-24.98	47.74
	10 500.00	-54.80	11.24	-36.25	5.73	V	-30.74	53.49

**8.3 PEAK-TO-AVERAGE RATIO**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
4	1.4 MHz	1732.5	QPSK	6	0	4.82
			16-QAM			5.60
			64-QAM			6.14
			256-QAM			6.73
	3 MHz		QPSK	15		4.97
			16-QAM			5.69
			64-QAM			6.07
			256-QAM			6.77
	5 MHz		QPSK	25		4.97
			16-QAM			5.65
			64-QAM			6.25
			256-QAM			6.79
	10 MHz		QPSK	50		5.04
			16-QAM			5.74
			64-QAM			6.28
			256-QAM			6.78
	15 MHz		QPSK	75		4.88
			16-QAM			5.64
			64-QAM			6.12
			256-QAM			6.76
20 MHz	QPSK	100	4.84			
	16-QAM		5.58			
	64-QAM		6.33			
	256-QAM		6.76			

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 139 ~ 162.

**8.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
4	1.4 MHz	1732.5	QPSK	6	0	1.0976
			16-QAM			1.0917
			64-QAM			1.0974
			256-QAM			1.0888
	3 MHz		QPSK	15		2.7076
			16-QAM			2.7002
			64-QAM			2.6985
			256-QAM			2.7012
	5 MHz		QPSK	25		4.4993
			16-QAM			4.4899
			64-QAM			4.5163
			256-QAM			4.5083
	10 MHz		QPSK	50		8.9913
			16-QAM			8.9979
			64-QAM			8.9996
			256-QAM			8.9873
	15 MHz		QPSK	75		13.445
			16-QAM			13.469
			64-QAM			13.450
			256-QAM			13.444
20 MHz	QPSK	100	17.992			
	16-QAM		17.909			
	64-QAM		17.950			
	256-QAM		17.905			

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 115 ~ 138.

**8.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
4	1.4	1710.7	3.4213	27.976	-72.469	-44.493	-13.00
		1732.5	3.4652	27.976	-75.886	-47.910	
		1754.3	3.5105	27.976	-74.553	-46.577	
	3	1711.5	3.4213	27.976	-72.995	-45.019	
		1732.5	3.4632	27.976	-75.445	-47.469	
		1753.5	3.5100	27.976	-72.913	-44.937	
	5	1712.5	3.4213	27.976	-71.797	-43.821	
		1732.5	3.4612	27.976	-74.849	-46.873	
		1752.5	3.5100	27.976	-73.208	-45.232	
	10	1715.0	3.4218	27.976	-72.565	-44.589	
		1732.5	3.4567	27.976	-74.813	-46.837	
		1750.0	3.5095	27.976	-74.281	-46.305	
	15	1717.5	3.4223	27.976	-72.999	-45.023	
		1732.5	3.4522	27.976	-73.814	-45.838	
		1747.5	3.5090	27.976	-73.750	-45.774	
	20	1720.0	3.4228	27.976	-72.018	-44.042	
		1732.5	3.4477	27.976	-73.602	-45.626	
		1745.0	3.5085	27.976	-73.165	-45.189	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 163 ~ 198.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131




## **8.6 BAND EDGE**

- Plots of the EUT's Band Edge are shown Page 78 ~ 114.

**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1710,700,000 Hz
- ▣ CHANNEL: 19957 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1710 699 988	0.0	0.000 000	0.000
100 %		-30	1710 699 973	-15.3	-0.000 001	-0.009
100 %		-20	1710 699 999	11.1	0.000 001	0.006
100 %		-10	1710 699 979	-8.7	-0.000 001	-0.005
100 %		0	1710 699 997	9.3	0.000 001	0.005
100 %		+10	1710 699 995	6.5	0.000 000	0.004
100 %		+30	1710 699 993	5.2	0.000 000	0.003
100 %		+40	1710 699 986	-2.6	0.000 000	-0.002
100 %		+50	1710 699 985	-3.6	0.000 000	-0.002
Batt. Endpoint		3.400	+20	1710 699 992	4.3	0.000 000

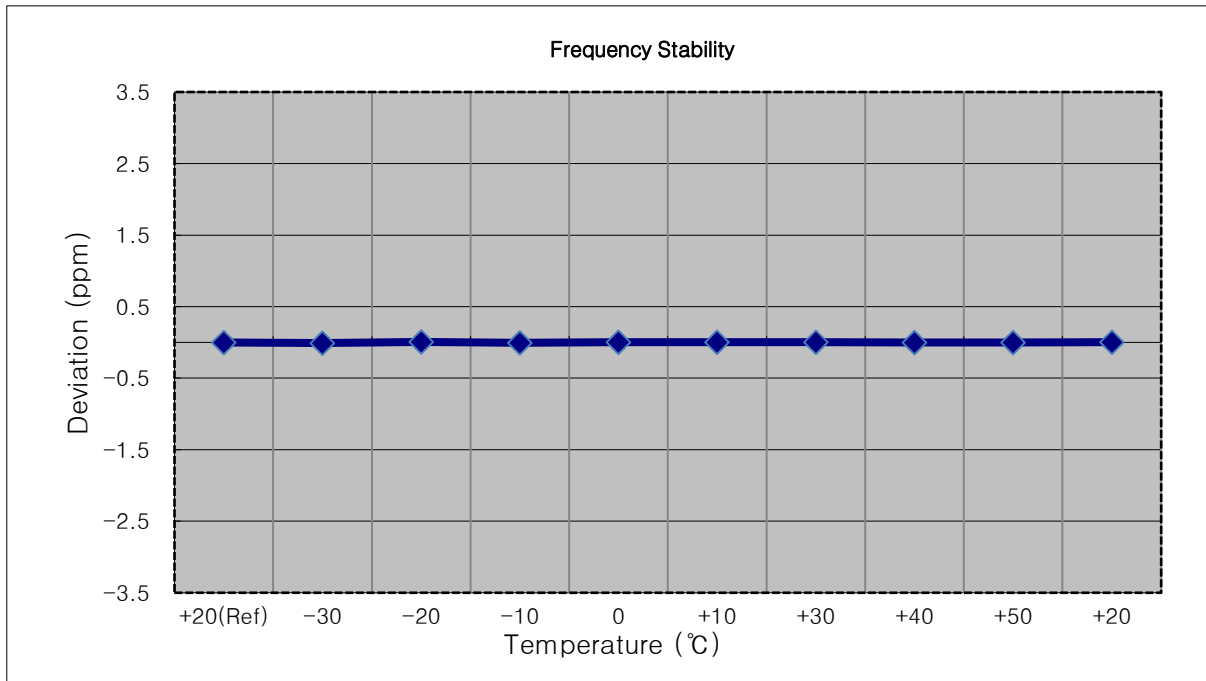


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 19965 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1711 500 005	0.0	0.000 000	0.000
100 %		-30	1711 499 991	-14.2	-0.000 001	-0.008
100 %		-20	1711 500 010	5.1	0.000 000	0.003
100 %		-10	1711 499 990	-14.5	-0.000 001	-0.008
100 %		0	1711 499 989	-15.9	-0.000 001	-0.009
100 %		+10	1711 499 988	-16.7	-0.000 001	-0.010
100 %		+30	1711 499 991	-14.2	-0.000 001	-0.008
100 %		+40	1711 500 001	-4.1	0.000 000	-0.002
100 %		+50	1711 500 002	-3.0	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1711 500 009	4.4	0.000 000	0.003

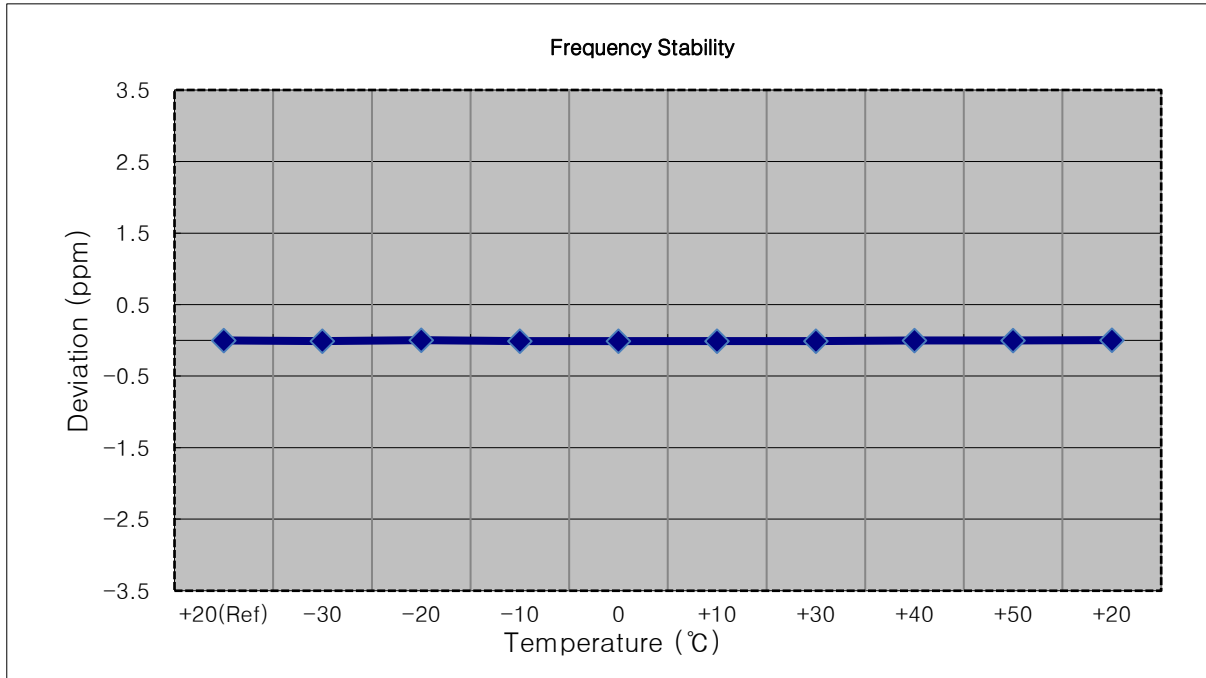


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1712,500,000 Hz
- ▣ CHANNEL: 19975 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1712 500 006	0.0	0.000 000	0.000
100 %		-30	1712 500 011	4.9	0.000 000	0.003
100 %		-20	1712 500 012	6.2	0.000 000	0.004
100 %		-10	1712 499 994	-12.0	-0.000 001	-0.007
100 %		0	1712 499 994	-12.2	-0.000 001	-0.007
100 %		+10	1712 500 012	5.7	0.000 000	0.003
100 %		+30	1712 499 997	-9.0	-0.000 001	-0.005
100 %		+40	1712 500 016	9.7	0.000 001	0.006
100 %		+50	1712 499 991	-15.2	-0.000 001	-0.009
Batt. Endpoint	3.400	+20	1712 499 992	-14.3	-0.000 001	-0.008

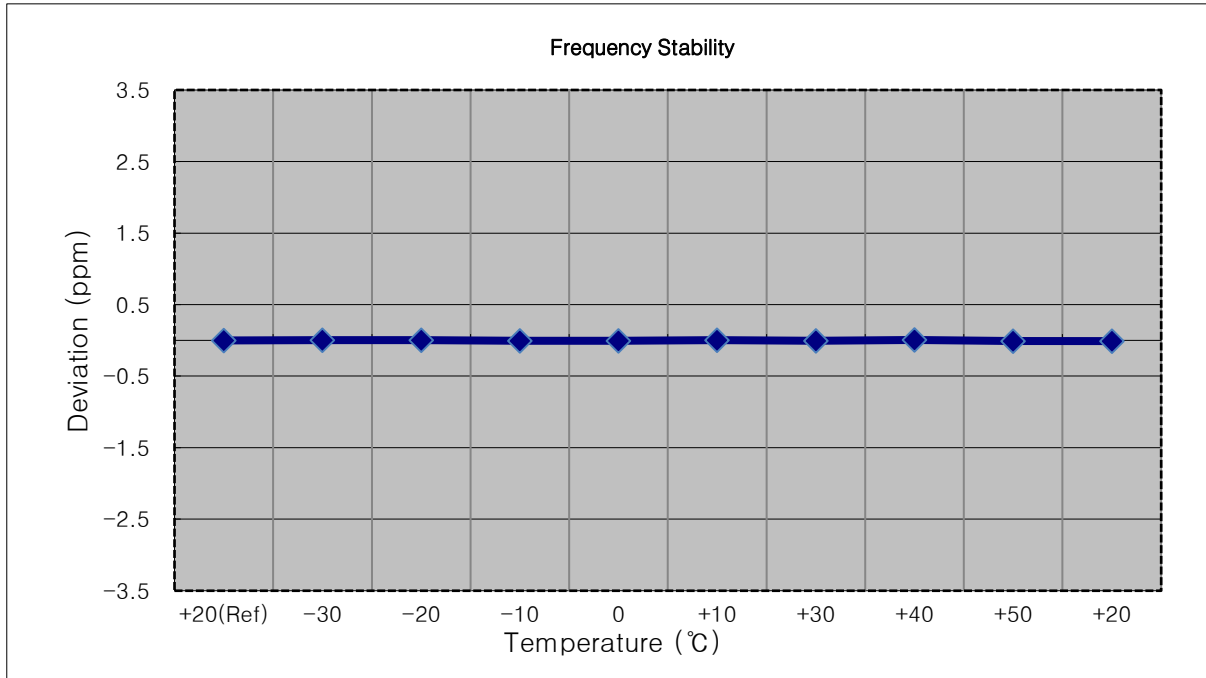


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1715,000,000 Hz
- ▣ CHANNEL: 20000 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1715 000 008	0.0	0.000 000	0.000
100 %		-30	1715 000 017	8.8	0.000 001	0.005
100 %		-20	1714 999 997	-11.3	-0.000 001	-0.007
100 %		-10	1715 000 014	5.6	0.000 000	0.003
100 %		0	1715 000 013	5.4	0.000 000	0.003
100 %		+10	1714 999 999	-9.0	-0.000 001	-0.005
100 %		+30	1715 000 016	8.4	0.000 000	0.005
100 %		+40	1714 999 994	-13.6	-0.000 001	-0.008
100 %		+50	1715 000 002	-6.2	0.000 000	-0.004
Batt. Endpoint	3.400	+20	1715 000 012	3.9	0.000 000	0.002

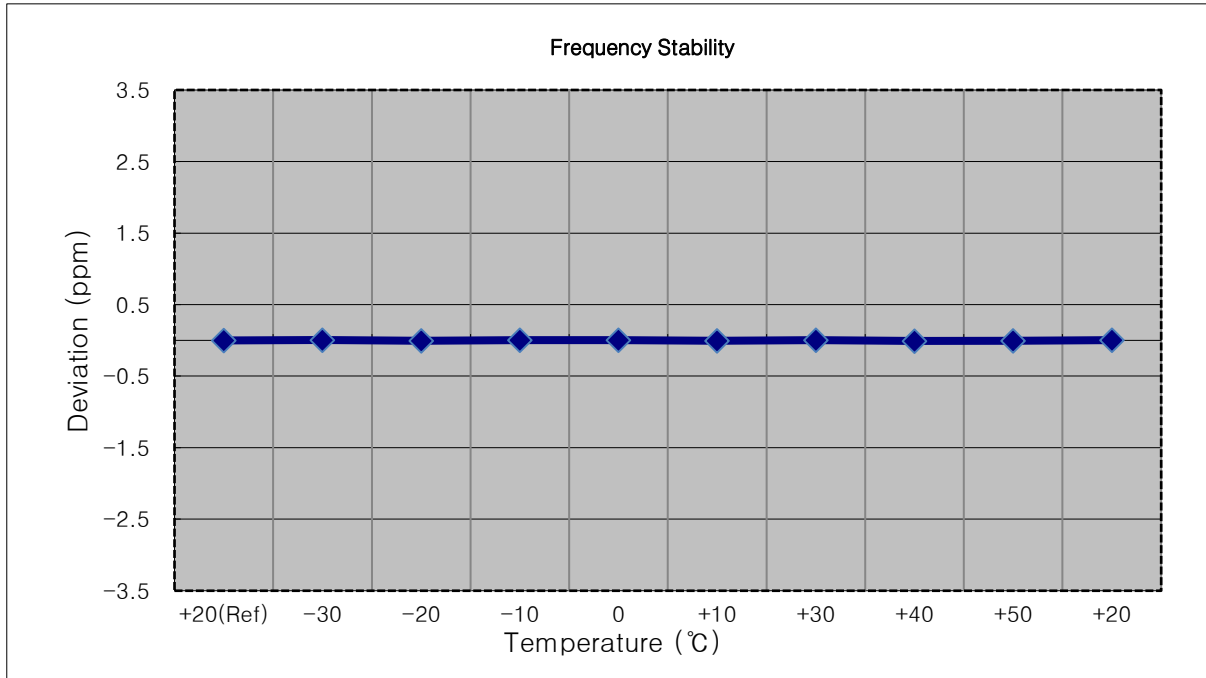


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1717,500,000 Hz
- ▣ CHANNEL: 20025 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1717 500 008	0.0	0.000 000	0.000
100 %		-30	1717 500 004	-3.7	0.000 000	-0.002
100 %		-20	1717 500 000	-7.6	0.000 000	-0.004
100 %		-10	1717 500 017	9.2	0.000 001	0.005
100 %		0	1717 500 021	13.0	0.000 001	0.008
100 %		+10	1717 499 999	-9.5	-0.000 001	-0.006
100 %		+30	1717 500 000	-8.2	0.000 000	-0.005
100 %		+40	1717 500 002	-5.7	0.000 000	-0.003
100 %		+50	1717 500 020	12.1	0.000 001	0.007
Batt. Endpoint	3.400	+20	1717 500 002	-6.2	0.000 000	-0.004

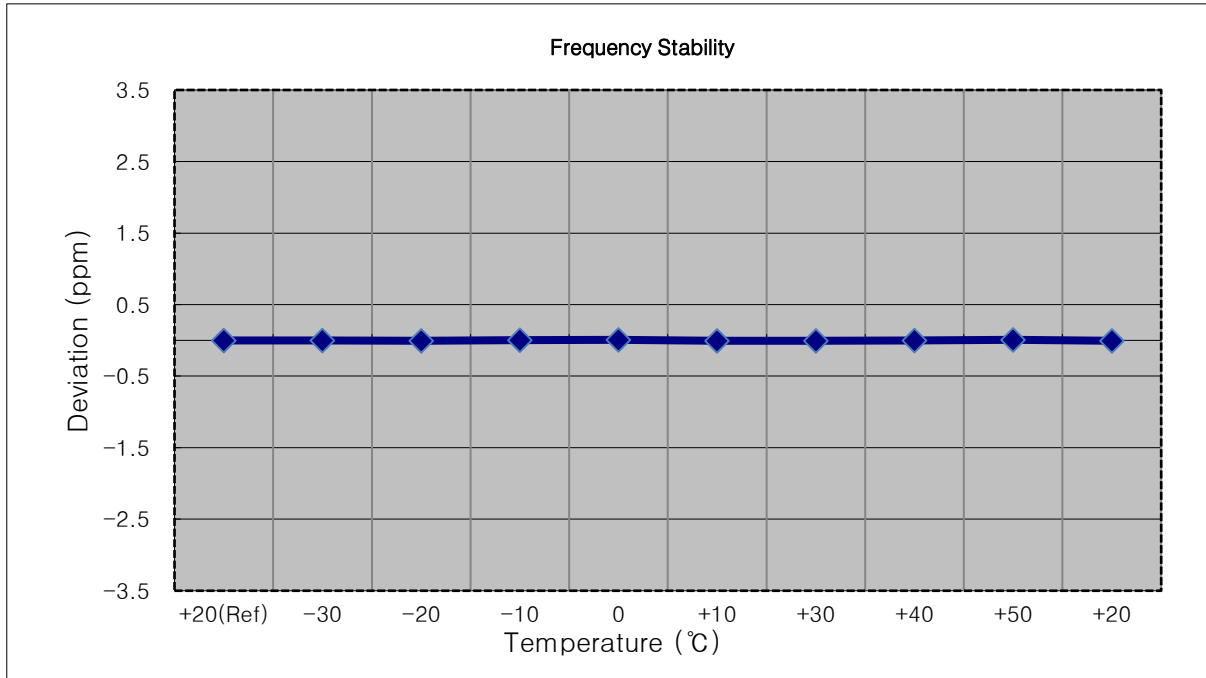


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 20050 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1720 000 004	0.0	0.000 000	0.000
100 %		-30	1720 000 014	9.6	0.000 001	0.006
100 %		-20	1720 000 014	9.7	0.000 001	0.006
100 %		-10	1719 999 993	-11.1	-0.000 001	-0.006
100 %		0	1719 999 992	-12.9	-0.000 001	-0.007
100 %		+10	1719 999 994	-10.5	-0.000 001	-0.006
100 %		+30	1720 000 011	6.2	0.000 000	0.004
100 %		+40	1720 000 008	3.5	0.000 000	0.002
100 %		+50	1720 000 014	9.4	0.000 001	0.005
Batt. Endpoint		3.400	+20	1719 999 995	-9.7	-0.000 001

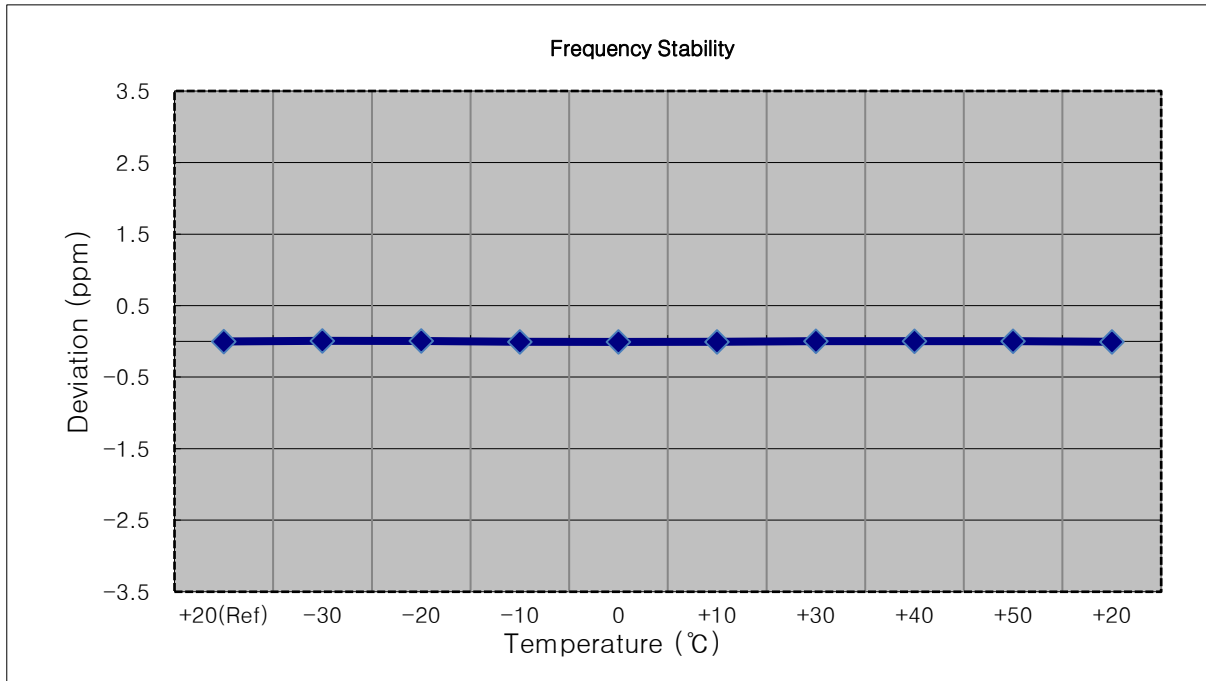

- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1732 500 009	0.0	0.000 000	0.000
100 %		-30	1732 500 025	15.7	0.000 001	0.009
100 %		-20	1732 500 006	-3.4	0.000 000	-0.002
100 %		-10	1732 500 015	6.0	0.000 000	0.003
100 %		0	1732 500 003	-6.4	0.000 000	-0.004
100 %		+10	1732 500 019	9.5	0.000 001	0.005
100 %		+30	1732 499 998	-11.0	-0.000 001	-0.006
100 %		+40	1732 500 022	12.7	0.000 001	0.007
100 %		+50	1732 500 016	7.0	0.000 000	0.004
Batt. Endpoint	3.400	+20	1732 500 001	-7.7	0.000 000	-0.004

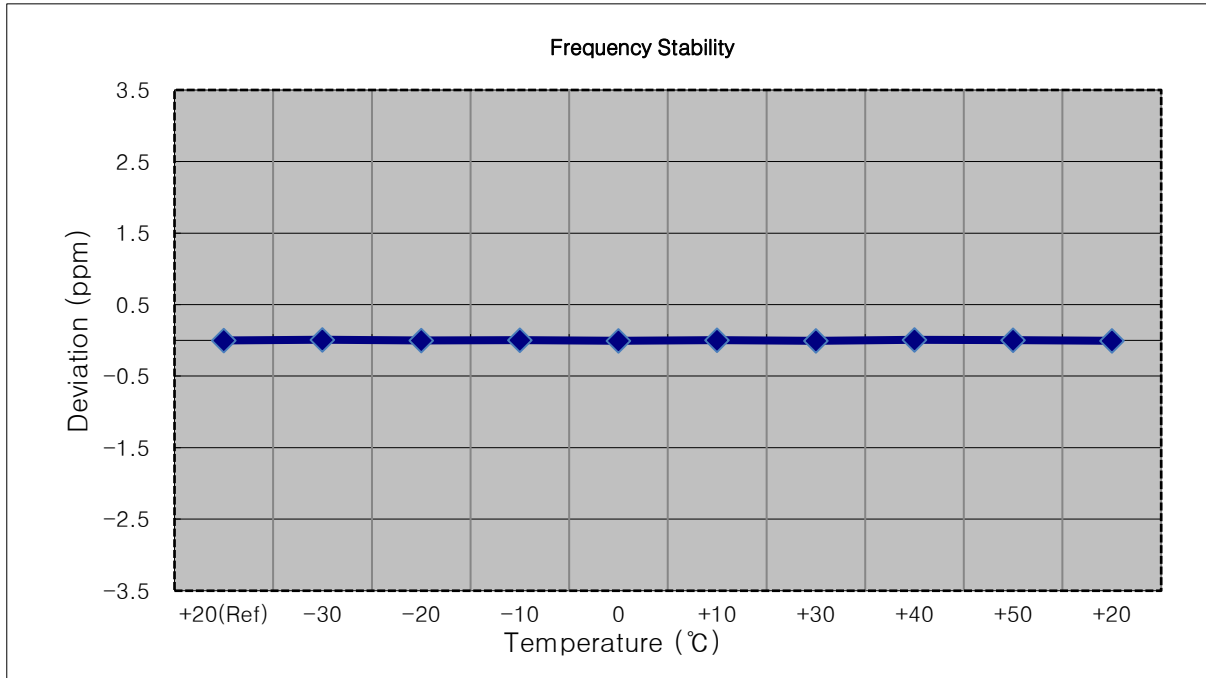




- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1732 499 990	0.0	0.000 000	0.000
100 %		-30	1732 500 001	11.0	0.000 001	0.006
100 %		-20	1732 499 983	-7.9	0.000 000	-0.005
100 %		-10	1732 499 978	-12.9	-0.000 001	-0.007
100 %		0	1732 499 998	7.2	0.000 000	0.004
100 %		+10	1732 500 004	13.9	0.000 001	0.008
100 %		+30	1732 500 002	12.0	0.000 001	0.007
100 %		+40	1732 499 999	8.2	0.000 000	0.005
100 %		+50	1732 499 979	-11.6	-0.000 001	-0.007
Batt. Endpoint	3.400	+20	1732 500 000	9.2	0.000 001	0.005

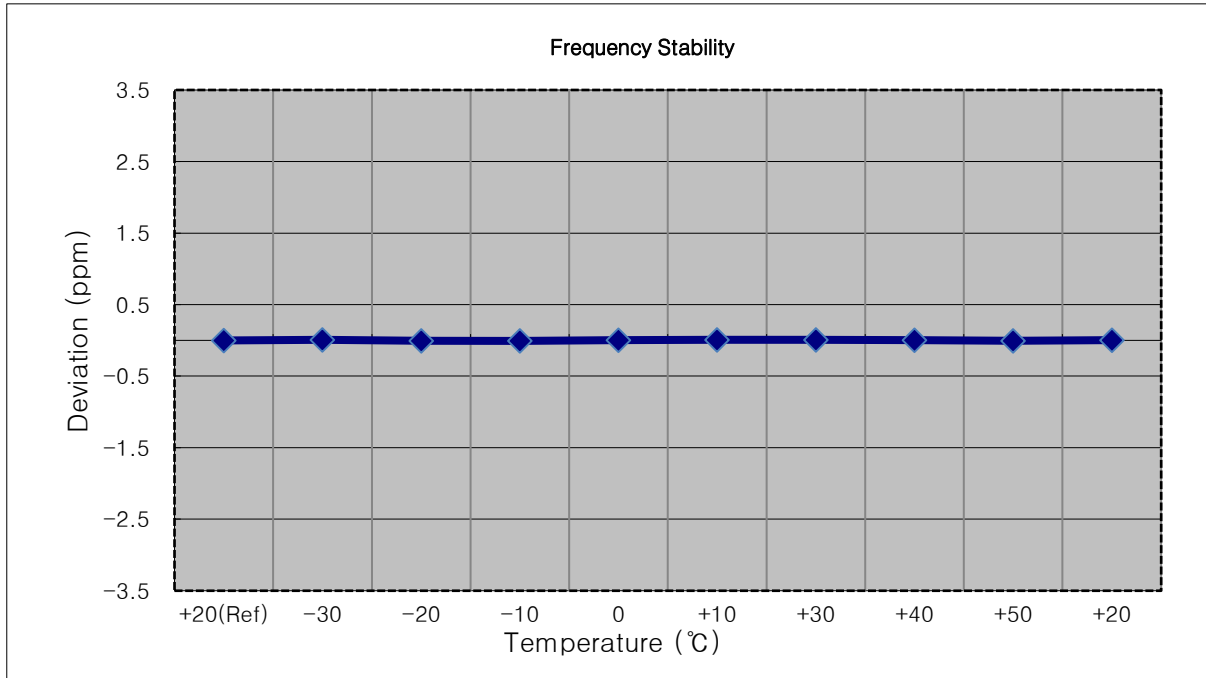


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1732 499 988	0.0	0.000 000	0.000
100 %		-30	1732 499 978	-10.1	-0.000 001	-0.006
100 %		-20	1732 499 972	-15.4	-0.000 001	-0.009
100 %		-10	1732 499 995	6.7	0.000 000	0.004
100 %		0	1732 499 976	-12.2	-0.000 001	-0.007
100 %		+10	1732 500 000	12.0	0.000 001	0.007
100 %		+30	1732 499 994	5.8	0.000 000	0.003
100 %		+40	1732 499 974	-14.1	-0.000 001	-0.008
100 %		+50	1732 499 999	11.1	0.000 001	0.006
Batt. Endpoint	3.400	+20	1732 499 997	9.4	0.000 001	0.005

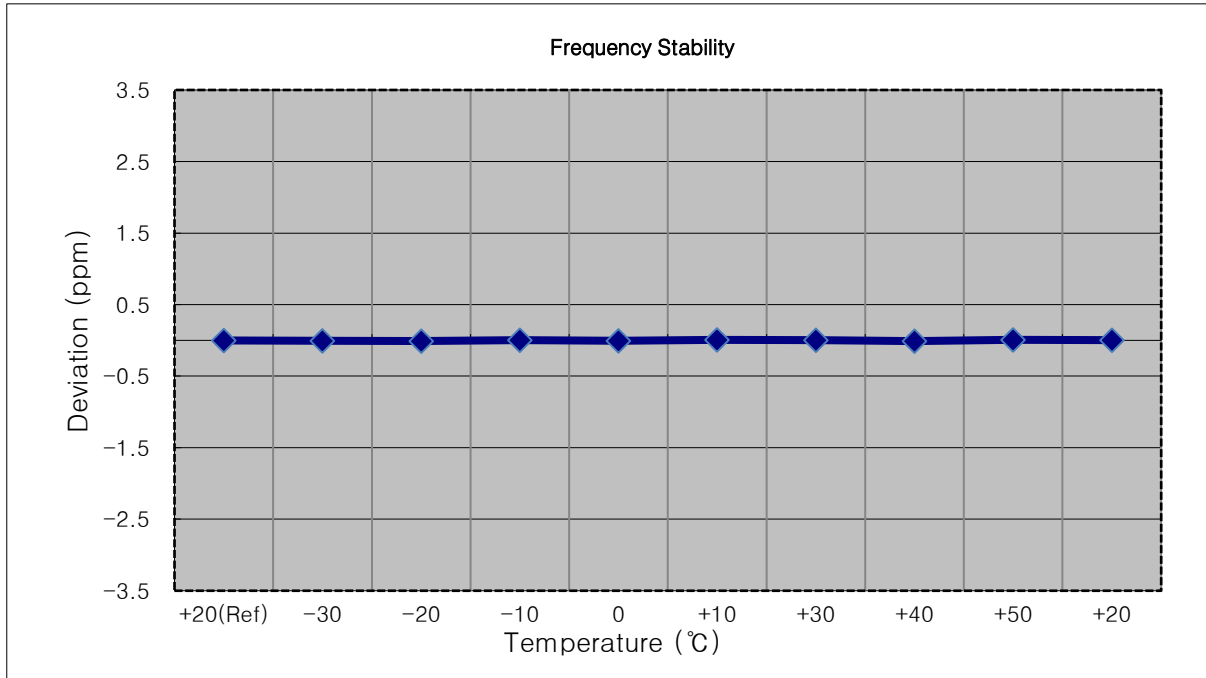


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1732 499 988	0.0	0.000 000	0.000
100 %		-30	1732 499 999	10.1	0.000 001	0.006
100 %		-20	1732 499 972	-16.3	-0.000 001	-0.009
100 %		-10	1732 499 977	-11.0	-0.000 001	-0.006
100 %		0	1732 500 002	13.6	0.000 001	0.008
100 %		+10	1732 499 981	-7.8	0.000 000	-0.005
100 %		+30	1732 499 979	-9.4	-0.000 001	-0.005
100 %		+40	1732 500 000	11.1	0.000 001	0.006
100 %		+50	1732 499 978	-10.8	-0.000 001	-0.006
Batt. Endpoint	3.400	+20	1732 499 975	-13.6	-0.000 001	-0.008

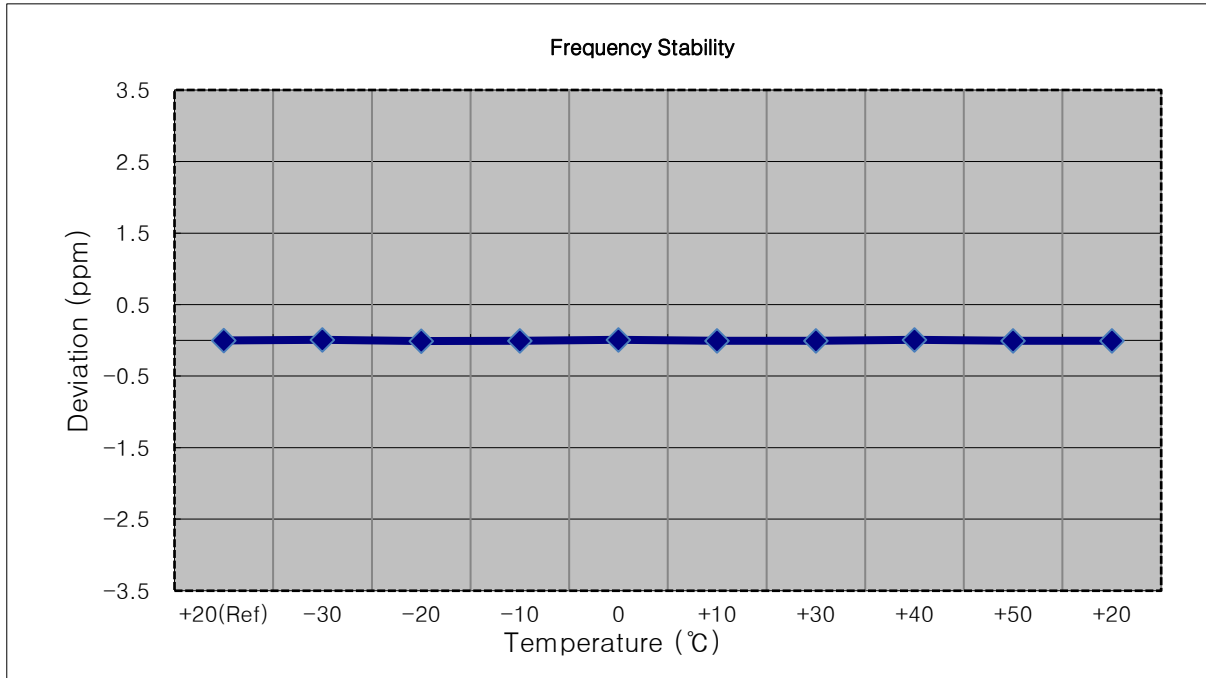


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1732 500 009	0.0	0.000 000	0.000
100 %		-30	1732 500 017	7.8	0.000 000	0.005
100 %		-20	1732 499 997	-12.8	-0.000 001	-0.007
100 %		-10	1732 500 019	9.9	0.000 001	0.006
100 %		0	1732 500 020	11.0	0.000 001	0.006
100 %		+10	1732 499 999	-10.2	-0.000 001	-0.006
100 %		+30	1732 500 003	-6.5	0.000 000	-0.004
100 %		+40	1732 500 017	7.8	0.000 000	0.005
100 %		+50	1732 500 020	10.3	0.000 001	0.006
Batt. Endpoint	3.400	+20	1732 500 021	11.9	0.000 001	0.007

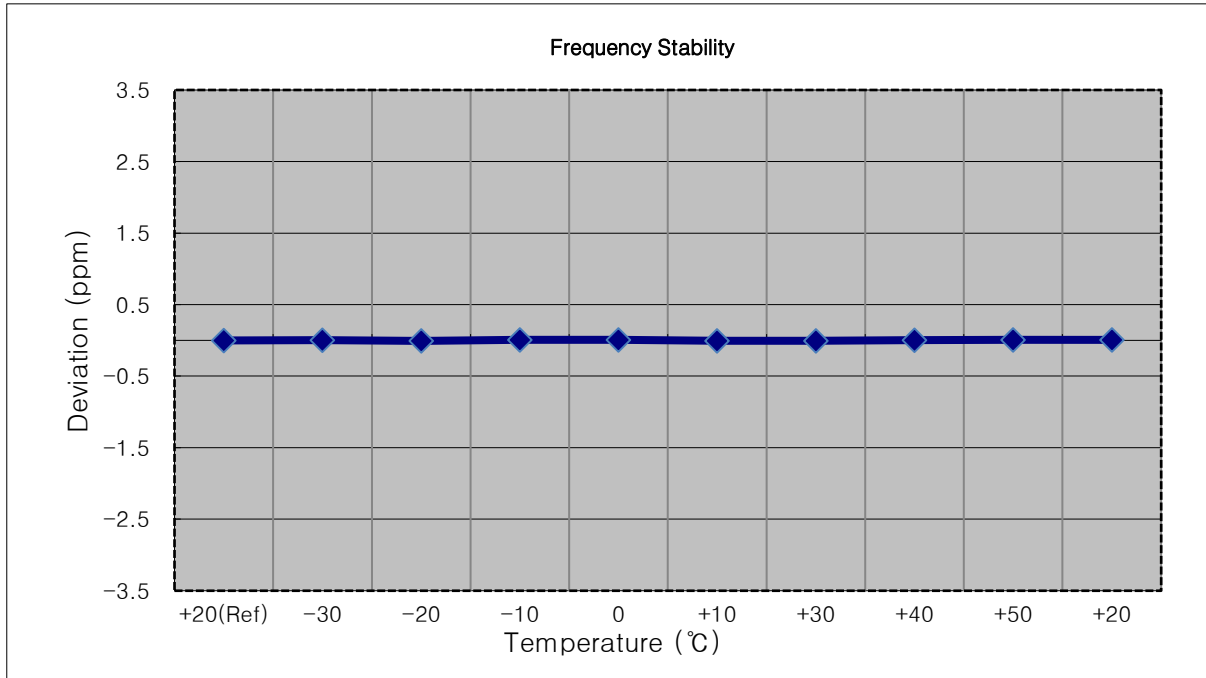


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1732 499 986	0.0	0.000 000	0.000
100 %		-30	1732 499 995	9.1	0.000 001	0.005
100 %		-20	1732 499 995	8.5	0.000 000	0.005
100 %		-10	1732 499 971	-15.0	-0.000 001	-0.009
100 %		0	1732 499 977	-9.0	-0.000 001	-0.005
100 %		+10	1732 499 995	9.2	0.000 001	0.005
100 %		+30	1732 500 000	13.7	0.000 001	0.008
100 %		+40	1732 499 999	12.6	0.000 001	0.007
100 %		+50	1732 499 997	10.7	0.000 001	0.006
Batt. Endpoint	3.400	+20	1732 500 000	13.7	0.000 001	0.008

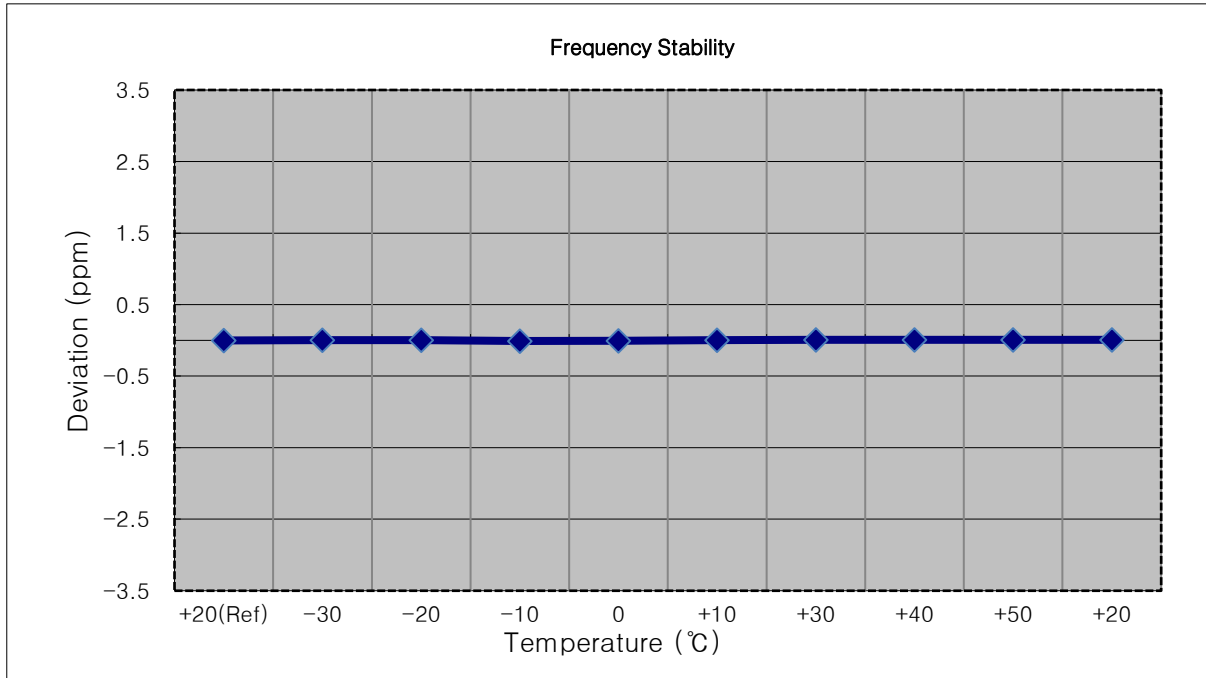


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1754,300,000 Hz
- ▣ CHANNEL: 20393 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1754 299 989	0.0	0.000 000	0.000
100 %		-30	1754 300 002	13.1	0.000 001	0.007
100 %		-20	1754 299 980	-8.7	0.000 000	-0.005
100 %		-10	1754 299 997	7.9	0.000 000	0.005
100 %		0	1754 299 982	-6.5	0.000 000	-0.004
100 %		+10	1754 300 007	18.0	0.000 001	0.010
100 %		+30	1754 299 979	-9.8	-0.000 001	-0.006
100 %		+40	1754 299 982	-6.4	0.000 000	-0.004
100 %		+50	1754 299 980	-8.2	0.000 000	-0.005
Batt. Endpoint	3.400	+20	1754 299 979	-10.1	-0.000 001	-0.006

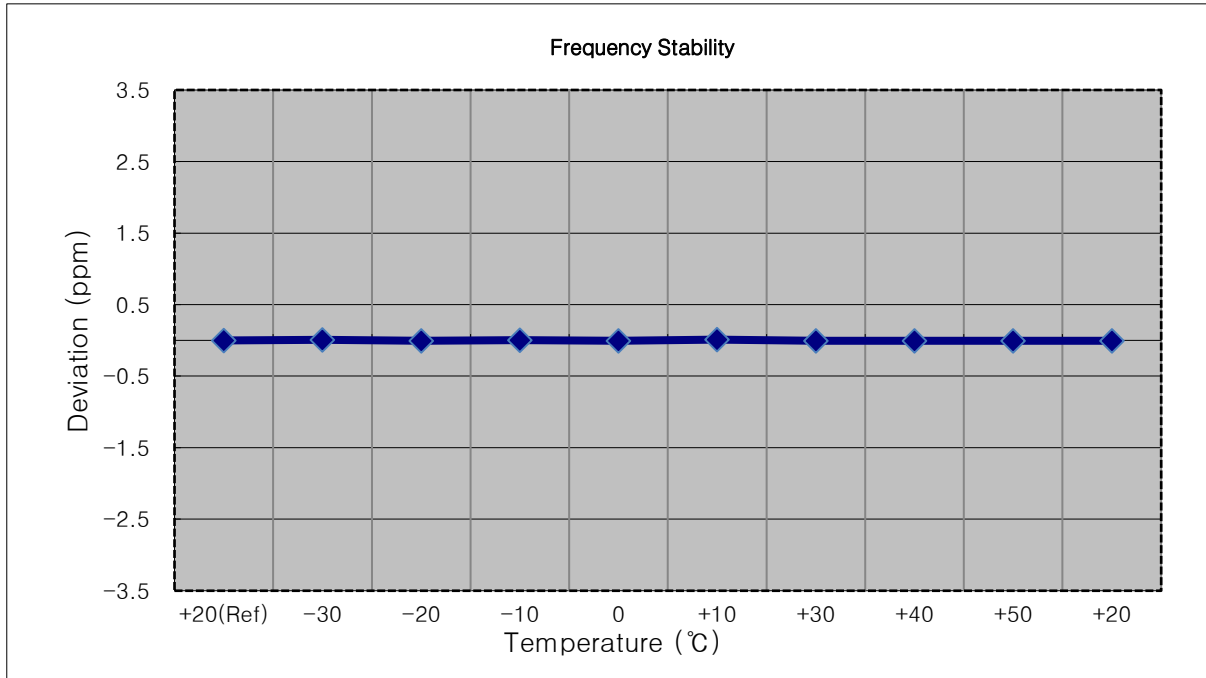


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1753,500,000 Hz
- ▣ CHANNEL: 20385 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1753 499 983	0.0	0.000 000	0.000
100 %		-30	1753 499 993	10.2	0.000 001	0.006
100 %		-20	1753 499 968	-15.0	-0.000 001	-0.009
100 %		-10	1753 500 000	16.5	0.000 001	0.009
100 %		0	1753 499 964	-19.1	-0.000 001	-0.011
100 %		+10	1753 499 966	-16.7	-0.000 001	-0.010
100 %		+30	1753 499 994	11.3	0.000 001	0.006
100 %		+40	1753 499 966	-17.6	-0.000 001	-0.010
100 %		+50	1753 499 995	12.2	0.000 001	0.007
Batt. Endpoint	3.400	+20	1753 499 992	9.1	0.000 001	0.005

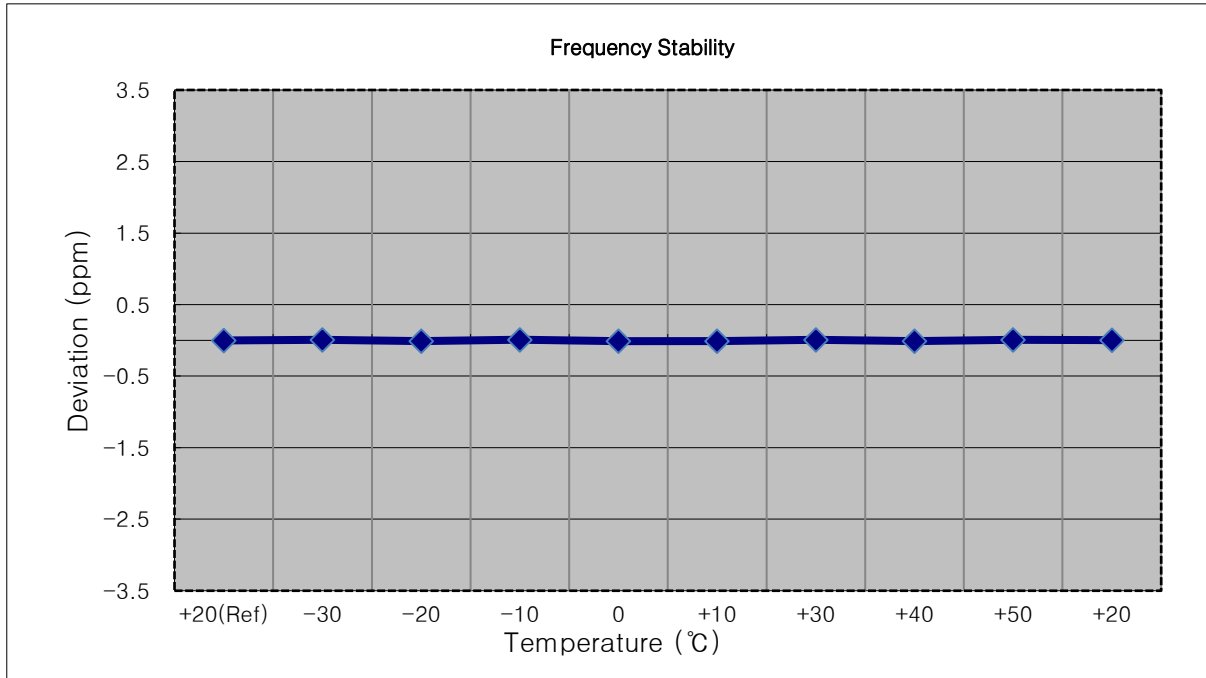

- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1752,500,000 Hz
- ▣ CHANNEL: 20375 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1752 500 004	0.0	0.000 000	0.000
100 %		-30	1752 499 991	-13.1	-0.000 001	-0.007
100 %		-20	1752 500 010	5.6	0.000 000	0.003
100 %		-10	1752 499 992	-11.7	-0.000 001	-0.007
100 %		0	1752 499 990	-14.3	-0.000 001	-0.008
100 %		+10	1752 499 989	-14.7	-0.000 001	-0.008
100 %		+30	1752 499 992	-11.6	-0.000 001	-0.007
100 %		+40	1752 499 994	-10.5	-0.000 001	-0.006
100 %		+50	1752 500 010	6.4	0.000 000	0.004
Batt. Endpoint	3.400	+20	1752 500 011	7.3	0.000 000	0.004

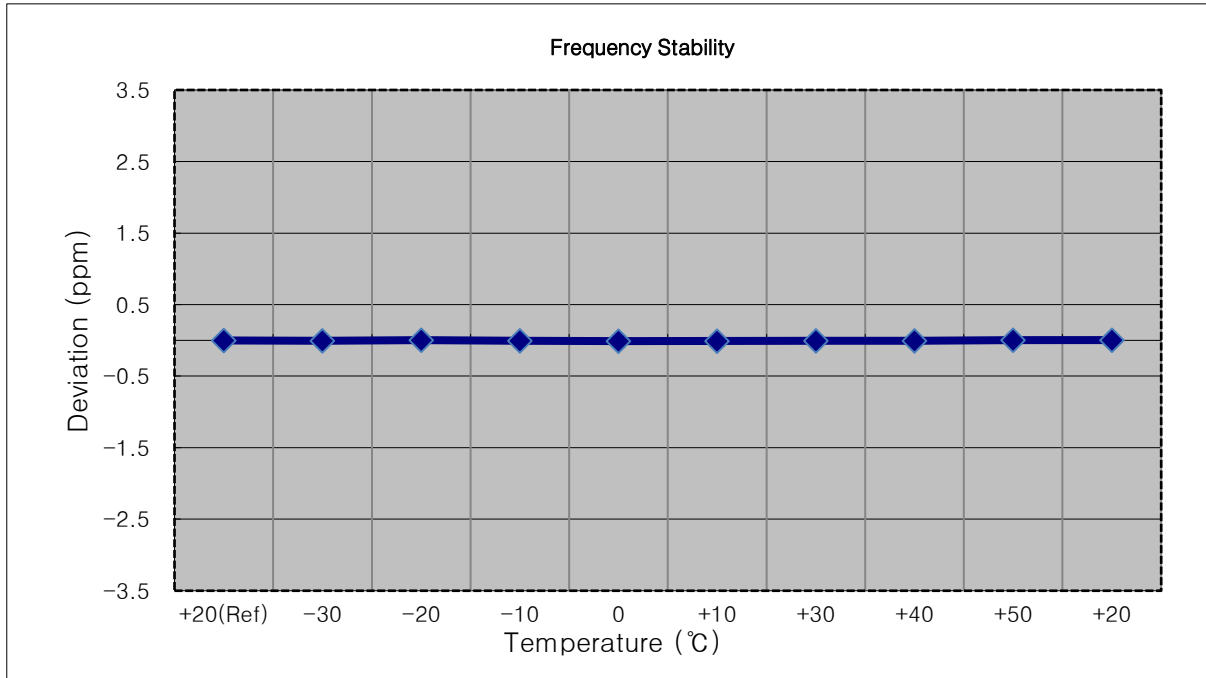




- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1750,000,000 Hz
- ▣ CHANNEL: 20350 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1749 999 983	0.0	0.000 000	0.000
100 %		-30	1749 999 969	-13.8	-0.000 001	-0.008
100 %		-20	1749 999 993	9.6	0.000 001	0.005
100 %		-10	1749 999 991	7.8	0.000 000	0.004
100 %		0	1749 999 986	2.4	0.000 000	0.001
100 %		+10	1749 999 970	-13.0	-0.000 001	-0.007
100 %		+30	1749 999 996	13.0	0.000 001	0.007
100 %		+40	1749 999 980	-3.3	0.000 000	-0.002
100 %		+50	1749 999 973	-10.0	-0.000 001	-0.006
Batt. Endpoint		3.400	+20	1749 999 977	-6.7	0.000 000

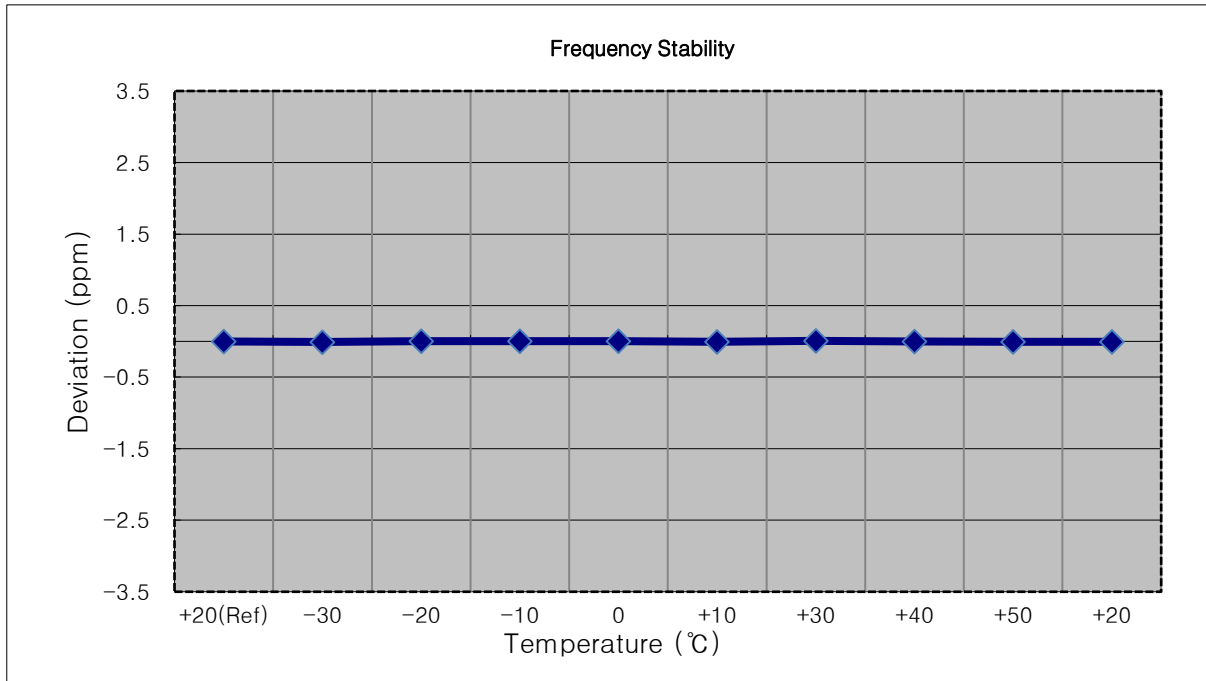


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1747,500,000 Hz
- ▣ CHANNEL: 20325 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1747 499 990	0.0	0.000 000	0.000
100 %		-30	1747 500 000	9.9	0.000 001	0.006
100 %		-20	1747 500 001	10.9	0.000 001	0.006
100 %		-10	1747 500 002	11.6	0.000 001	0.007
100 %		0	1747 499 999	8.6	0.000 000	0.005
100 %		+10	1747 499 984	-6.2	0.000 000	-0.004
100 %		+30	1747 499 982	-7.9	0.000 000	-0.005
100 %		+40	1747 500 003	12.6	0.000 001	0.007
100 %		+50	1747 499 983	-7.2	0.000 000	-0.004
Batt. Endpoint		3.400	+20	1747 500 000	10.1	0.000 001

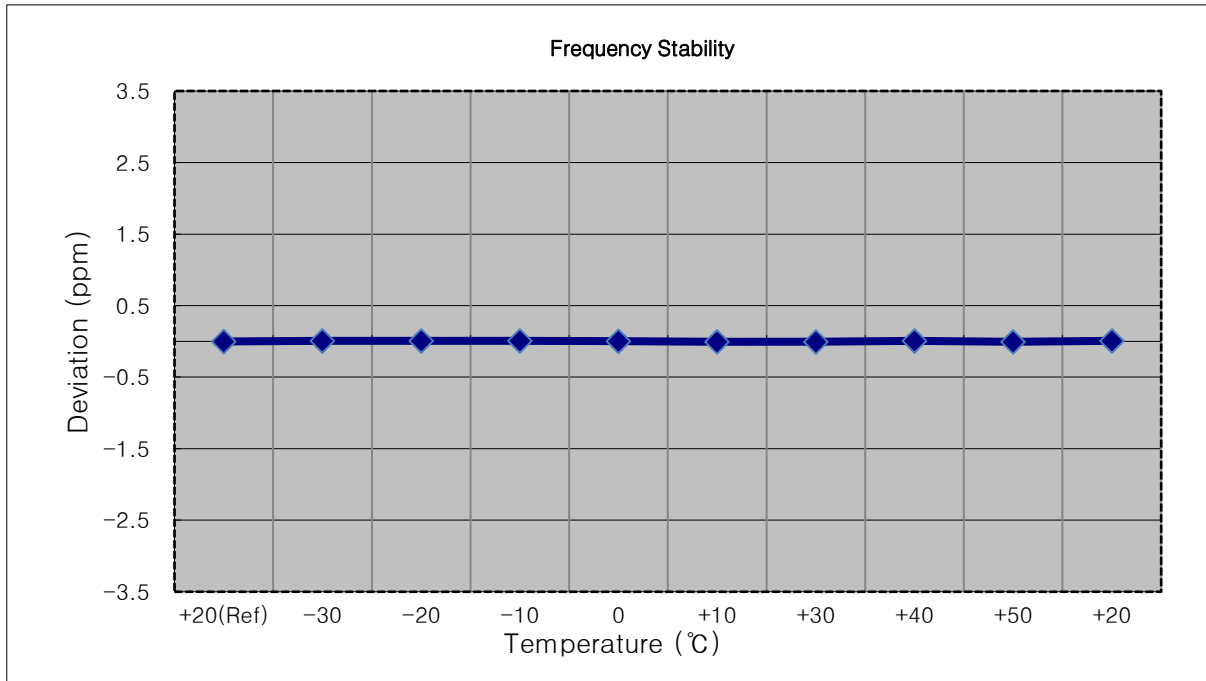

- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 20300 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1744 999 989	0.0	0.000 000	0.000
100 %		-30	1744 999 995	6.8	0.000 000	0.004
100 %		-20	1744 999 993	4.1	0.000 000	0.002
100 %		-10	1744 999 999	10.5	0.000 001	0.006
100 %		0	1744 999 995	6.7	0.000 000	0.004
100 %		+10	1744 999 978	-10.7	-0.000 001	-0.006
100 %		+30	1744 999 999	10.6	0.000 001	0.006
100 %		+40	1745 000 000	11.9	0.000 001	0.007
100 %		+50	1744 999 972	-16.2	-0.000 001	-0.009
Batt. Endpoint	3.400	+20	1745 000 007	18.1	0.000 001	0.010

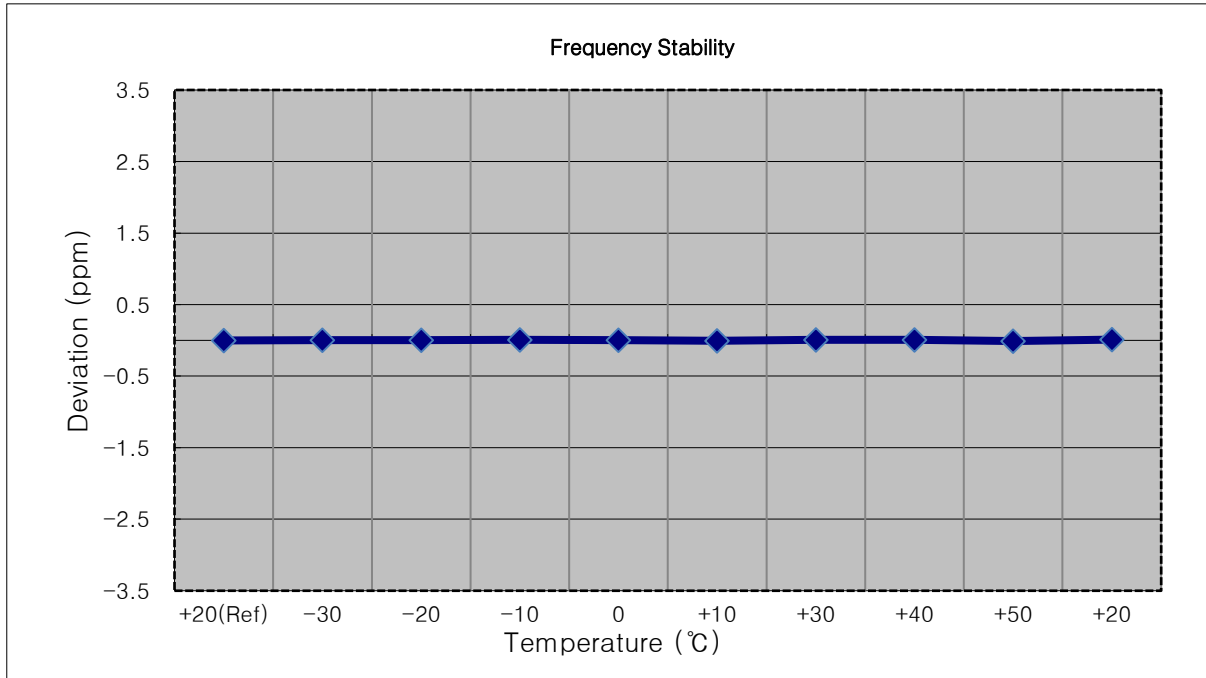

### 9. TEST DATA (Main 3 Ant)

#### 9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1710.7	LTE B4 1.4 MHz	QPSK	-25.48	8.25	9.94	2.24	H	< 1.00	0.039	15.95
		16-QAM	-26.67	7.06	9.94	2.24	H		0.030	14.76
		64-QAM	-27.80	5.93	9.94	2.24	H		0.023	13.63
		256-QAM	-30.20	3.53	9.94	2.24	H		0.013	11.23
1732.5		QPSK	-23.25	10.44	10.07	2.17	H		0.068	18.34
		16-QAM	-24.40	9.29	10.07	2.17	H		0.052	17.19
		64-QAM	-25.59	8.10	10.07	2.17	H		0.040	16.00
		256-QAM	-28.08	5.61	10.07	2.17	H		0.022	13.51
1754.3		QPSK	-22.45	11.23	10.18	2.17	H		0.084	19.24
		16-QAM	-23.64	10.04	10.18	2.17	H		0.064	18.05
		64-QAM	-24.75	8.93	10.18	2.17	H		0.049	16.94
		256-QAM	-27.20	6.48	10.18	2.17	H		0.028	14.49

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1711.5	LTE B4 3 MHz	QPSK	-25.34	8.39	9.94	2.24	H	< 1.00	0.041	16.09
		16-QAM	-26.53	7.20	9.94	2.24	H		0.031	14.90
		64-QAM	-27.65	6.08	9.94	2.24	H		0.024	13.78
		256-QAM	-30.11	3.62	9.94	2.24	H		0.014	11.32
1732.5		QPSK	-23.20	10.49	10.07	2.17	H		0.069	18.39
		16-QAM	-24.37	9.32	10.07	2.17	H		0.053	17.22
		64-QAM	-25.52	8.17	10.07	2.17	H		0.040	16.07
		256-QAM	-28.07	5.62	10.07	2.17	H		0.022	13.52
1753.5		QPSK	-22.45	11.23	10.18	2.17	H		0.084	19.24
		16-QAM	-23.65	10.03	10.18	2.17	H		0.064	18.04
		64-QAM	-24.74	8.94	10.18	2.17	H		0.050	16.95
		256-QAM	-27.22	6.46	10.18	2.17	H		0.028	14.47

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1712.5	LTE B4 5 MHz	QPSK	-25.15	8.58	9.94	2.24	H	< 1.00	0.042	16.28
		16-QAM	-26.34	7.39	9.94	2.24	H		0.032	15.09
		64-QAM	-27.48	6.25	9.94	2.24	H		0.025	13.95
		256-QAM	-29.93	3.80	9.94	2.24	H		0.014	11.50
1732.5		QPSK	-23.14	10.55	10.07	2.17	H		0.070	18.45
		16-QAM	-24.31	9.38	10.07	2.17	H		0.053	17.28
		64-QAM	-25.49	8.20	10.07	2.17	H		0.041	16.10
		256-QAM	-28.01	5.68	10.07	2.17	H		0.023	13.58
1752.5		QPSK	-22.45	11.26	10.17	2.15	H		0.085	19.28
		16-QAM	-23.64	10.07	10.17	2.15	H		0.064	18.09
		64-QAM	-24.75	8.96	10.17	2.15	H		0.050	16.98
		256-QAM	-27.22	6.49	10.17	2.15	H		0.028	14.51

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1715.0	LTE B4 10 MHz	QPSK	-24.76	8.88	9.98	2.23	H	< 1.00	0.046	16.62
		16-QAM	-25.92	7.72	9.98	2.23	H		0.035	15.46
		64-QAM	-27.04	6.60	9.98	2.23	H		0.027	14.34
		256-QAM	-29.53	4.11	9.98	2.23	H		0.015	11.85
1732.5		QPSK	-22.98	10.71	10.07	2.17	H		0.073	18.61
		16-QAM	-24.14	9.55	10.07	2.17	H		0.056	17.45
		64-QAM	-25.30	8.39	10.07	2.17	H		0.043	16.29
		256-QAM	-27.83	5.86	10.07	2.17	H		0.024	13.76
1750.0		QPSK	-22.48	11.23	10.17	2.15	H		0.084	19.25
		16-QAM	-23.67	10.04	10.17	2.15	H		0.064	18.06
		64-QAM	-24.75	8.96	10.17	2.15	H		0.050	16.98
		256-QAM	-27.23	6.48	10.17	2.15	H		0.028	14.50

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1717.5	LTE B4 15 MHz	QPSK	-24.23	9.41	10.01	2.22	H	< 1.00	0.052	17.20
		16-QAM	-25.42	8.22	10.01	2.22	H		0.040	16.01
		64-QAM	-26.57	7.07	10.01	2.22	H		0.031	14.86
		256-QAM	-29.09	4.55	10.01	2.22	H		0.017	12.34
1732.5		QPSK	-22.87	10.82	10.07	2.17	H		0.074	18.72
		16-QAM	-24.05	9.64	10.07	2.17	H		0.057	17.54
		64-QAM	-25.22	8.47	10.07	2.17	H		0.043	16.37
		256-QAM	-27.72	5.97	10.07	2.17	H		0.024	13.87
1747.5		QPSK	-22.46	11.25	10.17	2.15	H		0.085	19.27
		16-QAM	-23.68	10.03	10.17	2.15	H		0.064	18.05
		64-QAM	-24.77	8.94	10.17	2.15	H		0.050	16.96
		256-QAM	-27.27	6.44	10.17	2.15	H		0.028	14.46

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1720.0	LTE B4 20 MHz	QPSK	-23.65	9.86	10.01	2.22	H	< 1.00	0.058	17.65
		16-QAM	-24.79	8.72	10.01	2.22	H		0.045	16.51
		64-QAM	-25.97	7.54	10.01	2.22	H		0.034	15.33
		256-QAM	-28.55	4.96	10.01	2.22	H		0.019	12.75
1732.5		QPSK	-22.86	10.83	10.07	2.17	H		0.075	18.73
		16-QAM	-24.03	9.66	10.07	2.17	H		0.057	17.56
		64-QAM	-25.15	8.54	10.07	2.17	H		0.044	16.44
		256-QAM	-27.66	6.03	10.07	2.17	H		0.025	13.93
1745.0		QPSK	-22.47	11.21	10.15	2.15	H		0.083	19.21
		16-QAM	-23.68	10.00	10.15	2.15	H		0.063	18.00
		64-QAM	-24.73	8.95	10.15	2.15	H		0.050	16.95
		256-QAM	-27.25	6.43	10.15	2.15	H		0.028	14.43

**9.2 RADIATED SPURIOUS EMISSIONS**

- ▣ OPERATING FREQUENCY: 1752.5 MHz
- ▣ MEASURED OUTPUT POWER: 19.28 dBm = 0.085 W
- ▣ MODE: LTE B4
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  32.28 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
19975 (1712.5)	3 425.00	-50.93	12.43	-57.61	3.06	H	-48.24	67.52
	5 137.50	-50.14	12.35	-47.39	3.92	V	-38.96	58.24
	6 850.00	-44.84	11.90	-38.36	4.49	H	-30.95	50.23
	8 562.50	-43.90	11.42	-31.14	4.93	H	-24.65	43.93
20175 (1732.5)	3 465.00	-48.27	12.35	-54.91	3.11	H	-45.67	64.95
	5 197.50	-50.29	12.63	-49.21	3.86	V	-40.44	59.72
	6 930.00	-46.89	11.65	-39.76	4.52	H	-32.63	51.90
	8 662.50	-45.51	11.06	-32.08	5.04	H	-26.06	45.33
20375 (1752.5)	3 505.00	-47.61	12.34	-53.83	3.11	H	-44.60	63.87
	5 257.50	-48.17	12.99	-47.85	3.83	V	-38.69	57.97
	7 010.00	-44.86	11.26	-36.94	4.56	V	-30.24	49.52
	8 762.50	-45.00	10.83	-30.62	5.11	H	-24.90	44.18
	10 515.00	-56.38	11.23	-37.83	5.72	V	-32.32	51.60

**9.3 PEAK-TO-AVERAGE RATIO**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
4	1.4 MHz	1732.5	QPSK	6	0	5.53
			16-QAM			6.27
			64-QAM			6.64
			256-QAM			6.76
	3 MHz		QPSK	15		5.67
			16-QAM			6.30
			64-QAM			6.67
			256-QAM			6.82
	5 MHz		QPSK	25		5.56
			16-QAM			6.27
			64-QAM			6.63
			256-QAM			6.84
	10 MHz		QPSK	50		5.60
			16-QAM			6.27
			64-QAM			6.60
			256-QAM			6.82
	15 MHz		QPSK	75		5.52
			16-QAM			6.24
			64-QAM			6.61
			256-QAM			6.83
20 MHz	QPSK	100	5.45			
	16-QAM		6.23			
	64-QAM		6.57			
	256-QAM		6.85			

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 260 ~ 283.



**9.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
4	1.4 MHz	1732.5	QPSK	6	0	1.0978
			16-QAM			1.0942
			64-QAM			1.0959
			256-QAM			1.0925
	3 MHz		QPSK	15		2.7080
			16-QAM			2.6984
			64-QAM			2.7040
			256-QAM			2.7025
	5 MHz		QPSK	25		4.5052
			16-QAM			4.5036
			64-QAM			4.4921
			256-QAM			4.5003
	10 MHz		QPSK	50		8.9837
			16-QAM			8.9804
			64-QAM			8.9765
			256-QAM			8.9803
	15 MHz		QPSK	75		13.455
			16-QAM			13.467
			64-QAM			13.460
			256-QAM			13.453
20 MHz	QPSK	100	18.004			
	16-QAM		17.890			
	64-QAM		17.901			
	256-QAM		17.948			

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 236 ~ 259.

**9.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
4	1.4	1710.7	3.4213	27.976	-64.281	-36.305	-13.00
		1732.5	3.4647	27.976	-68.788	-40.812	
		1754.3	3.5100	27.976	-64.947	-36.971	
	3	1711.5	3.4213	27.976	-64.391	-36.415	
		1732.5	3.4632	27.976	-69.078	-41.102	
		1753.5	3.5100	27.976	-65.828	-37.852	
	5	1712.5	3.4213	27.976	-63.832	-35.856	
		1732.5	3.4612	27.976	-68.513	-40.537	
		1752.5	3.5100	27.976	-66.031	-38.055	
	10	1715.0	3.4218	27.976	-63.836	-35.860	
		1732.5	3.4567	27.976	-67.745	-39.769	
		1750.0	3.5095	27.976	-65.270	-37.294	
	15	1717.5	3.4223	27.976	-63.783	-35.807	
		1732.5	3.4522	27.976	-67.049	-39.073	
		1747.5	3.5090	27.976	-66.038	-38.062	
	20	1720.0	3.4228	27.976	-63.998	-36.022	
		1732.5	3.4477	27.976	-66.152	-38.176	
		1745.0	3.5085	27.976	-64.929	-36.953	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 284 ~ 319.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


## 9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 200 ~ 235.

**9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1710,700,000 Hz
- ▣ CHANNEL: 19957 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1710 700 008	0.0	0.000 000	0.000
100 %		-30	1710 700 001	-7.4	0.000 000	-0.004
100 %		-20	1710 700 005	-3.2	0.000 000	-0.002
100 %		-10	1710 700 015	6.4	0.000 000	0.004
100 %		0	1710 700 001	-7.4	0.000 000	-0.004
100 %		+10	1710 699 996	-12.4	-0.000 001	-0.007
100 %		+30	1710 699 998	-10.0	-0.000 001	-0.006
100 %		+40	1710 700 014	5.7	0.000 000	0.003
100 %		+50	1710 700 003	-4.9	0.000 000	-0.003
Batt. Endpoint		3.400	+20	1710 700 001	-7.5	0.000 000

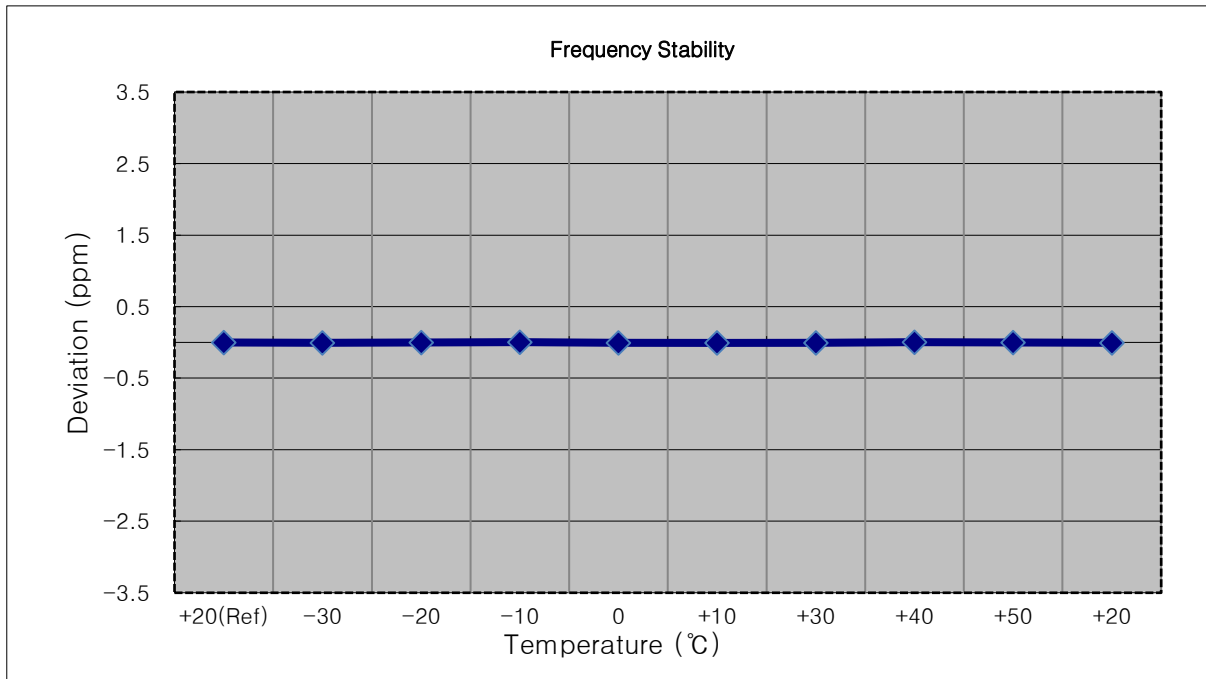


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 19965 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1711 500 006	0.0	0.000 000	0.000
100 %		-30	1711 499 993	-13.2	-0.000 001	-0.008
100 %		-20	1711 499 998	-8.4	0.000 000	-0.005
100 %		-10	1711 499 991	-14.9	-0.000 001	-0.009
100 %		0	1711 499 991	-15.0	-0.000 001	-0.009
100 %		+10	1711 499 995	-11.8	-0.000 001	-0.007
100 %		+30	1711 500 003	-3.4	0.000 000	-0.002
100 %		+40	1711 499 992	-14.2	-0.000 001	-0.008
100 %		+50	1711 500 010	3.8	0.000 000	0.002
Batt. Endpoint	3.400	+20	1711 499 997	-9.3	-0.000 001	-0.005

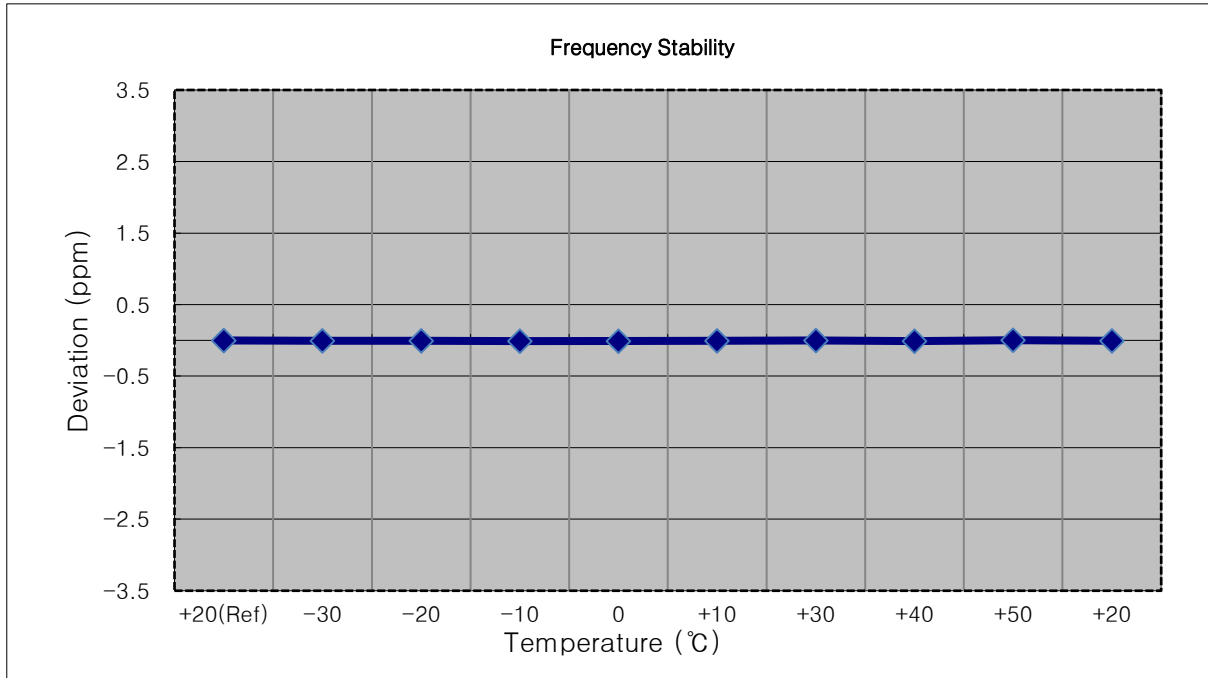


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1712,500,000 Hz
- ▣ CHANNEL: 19975 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1712 500 009	0.0	0.000 000	0.000
100 %		-30	1712 500 018	9.2	0.000 001	0.005
100 %		-20	1712 500 004	-5.2	0.000 000	-0.003
100 %		-10	1712 500 017	8.1	0.000 000	0.005
100 %		0	1712 499 999	-10.3	-0.000 001	-0.006
100 %		+10	1712 500 017	8.1	0.000 000	0.005
100 %		+30	1712 500 004	-4.6	0.000 000	-0.003
100 %		+40	1712 500 014	5.5	0.000 000	0.003
100 %		+50	1712 500 001	-8.1	0.000 000	-0.005
Batt. Endpoint	3.400	+20	1712 500 004	-5.2	0.000 000	-0.003

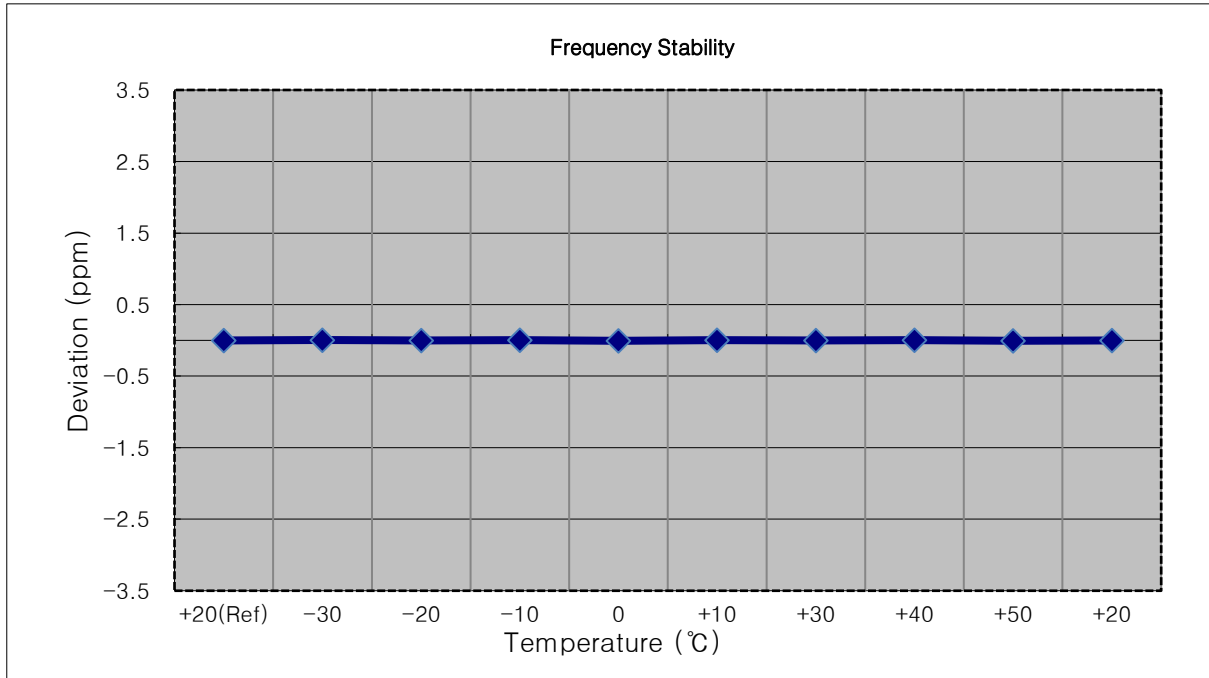


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1715,000,000 Hz
- ▣ CHANNEL: 20000 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1715 000 005	0.0	0.000 000	0.000
100 %		-30	1714 999 997	-8.0	0.000 000	-0.005
100 %		-20	1714 999 999	-5.4	0.000 000	-0.003
100 %		-10	1714 999 995	-10.2	-0.000 001	-0.006
100 %		0	1714 999 997	-7.8	0.000 000	-0.005
100 %		+10	1714 999 993	-11.9	-0.000 001	-0.007
100 %		+30	1714 999 997	-8.0	0.000 000	-0.005
100 %		+40	1714 999 997	-7.7	0.000 000	-0.004
100 %		+50	1714 999 994	-10.9	-0.000 001	-0.006
Batt. Endpoint	3.400	+20	1714 999 997	-8.1	0.000 000	-0.005

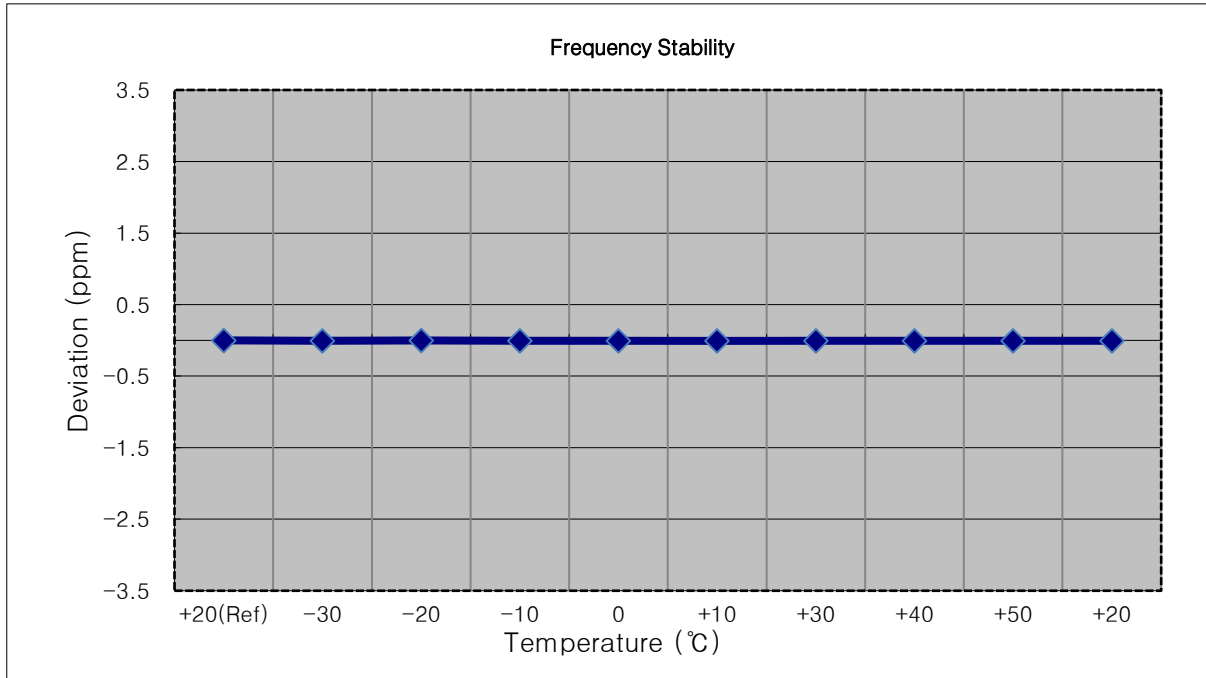

- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1717,500,000 Hz
- ▣ CHANNEL: 20025 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1717 500 008	0.0	0.000 000	0.000
100 %		-30	1717 500 000	-7.9	0.000 000	-0.005
100 %		-20	1717 500 015	7.1	0.000 000	0.004
100 %		-10	1717 500 001	-7.0	0.000 000	-0.004
100 %		0	1717 500 001	-6.7	0.000 000	-0.004
100 %		+10	1717 499 998	-9.6	-0.000 001	-0.006
100 %		+30	1717 499 997	-11.2	-0.000 001	-0.007
100 %		+40	1717 500 003	-4.7	0.000 000	-0.003
100 %		+50	1717 500 004	-3.9	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1717 500 013	5.4	0.000 000	0.003

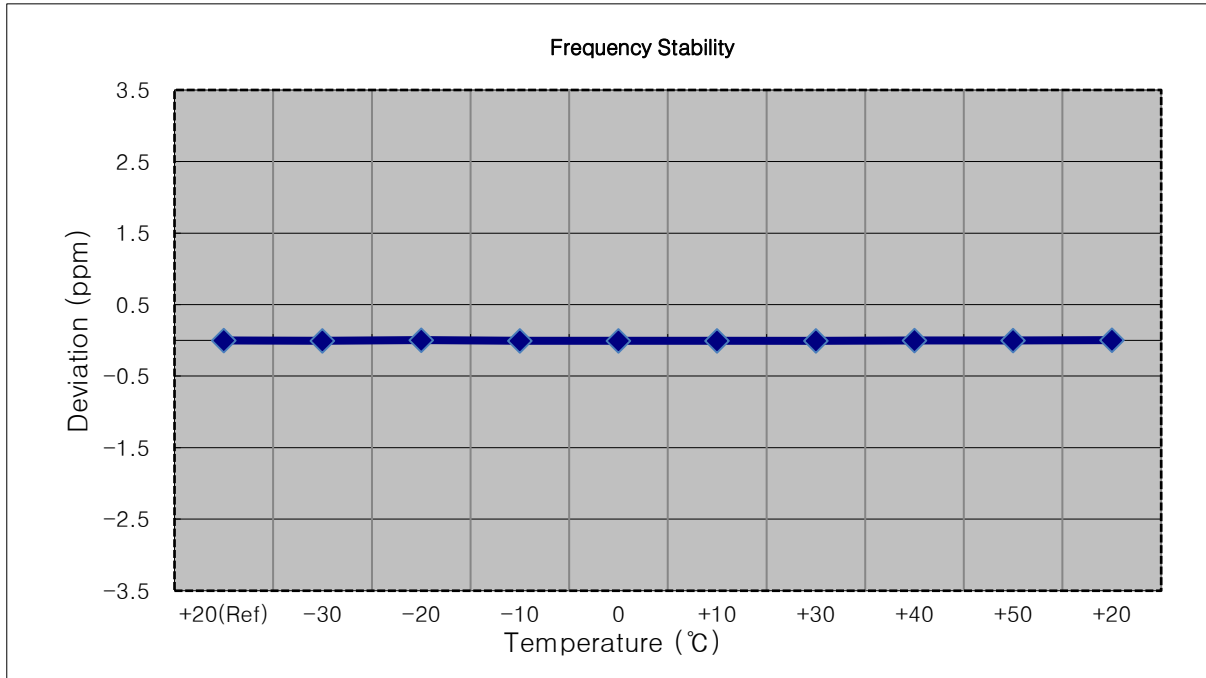




- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 20050 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1719 999 988	0.0	0.000 000	0.000
100 %		-30	1719 999 994	5.5	0.000 000	0.003
100 %		-20	1719 999 992	3.8	0.000 000	0.002
100 %		-10	1719 999 992	3.3	0.000 000	0.002
100 %		0	1719 999 981	-7.6	0.000 000	-0.004
100 %		+10	1719 999 992	4.1	0.000 000	0.002
100 %		+30	1719 999 994	5.9	0.000 000	0.003
100 %		+40	1719 999 993	5.1	0.000 000	0.003
100 %		+50	1719 999 979	-9.3	-0.000 001	-0.005
Batt. Endpoint		3.400	+20	1719 999 979	-9.7	-0.000 001

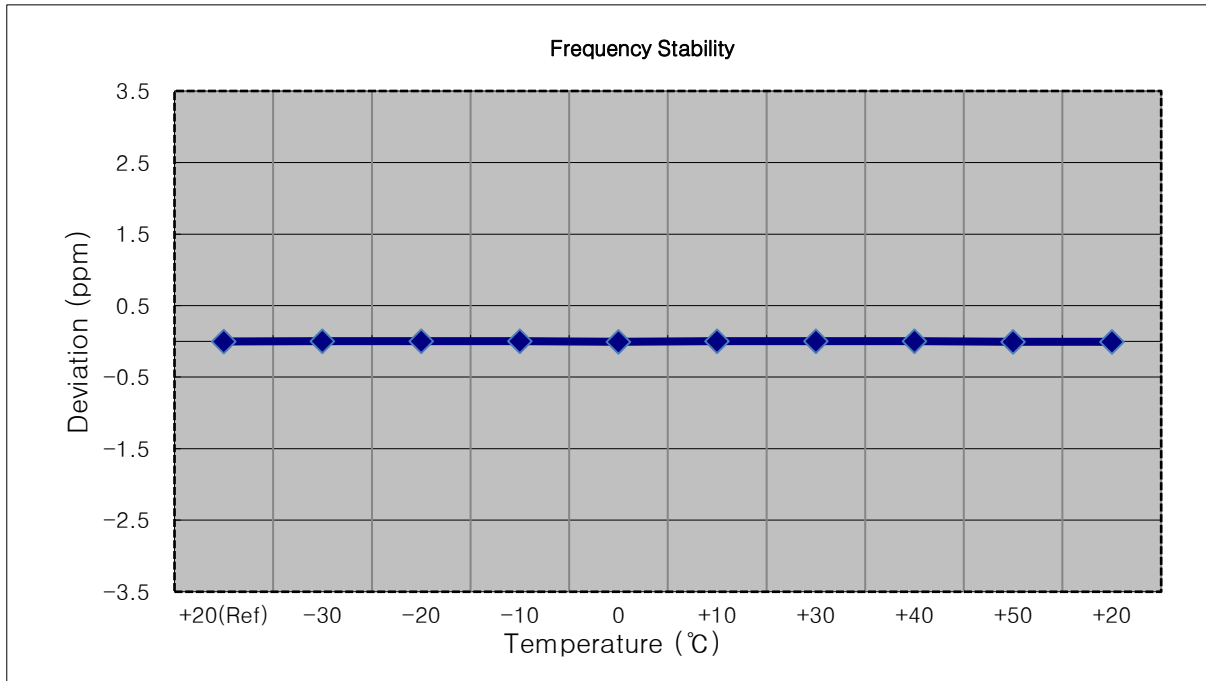


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1732 499 990	0.0	0.000 000	0.000
100 %		-30	1732 499 982	-8.4	0.000 000	-0.005
100 %		-20	1732 499 996	5.9	0.000 000	0.003
100 %		-10	1732 499 996	5.7	0.000 000	0.003
100 %		0	1732 500 000	9.4	0.000 001	0.005
100 %		+10	1732 500 000	10.0	0.000 001	0.006
100 %		+30	1732 499 981	-9.2	-0.000 001	-0.005
100 %		+40	1732 500 001	10.3	0.000 001	0.006
100 %		+50	1732 499 998	8.0	0.000 000	0.005
Batt. Endpoint	3.400	+20	1732 499 983	-7.8	0.000 000	-0.005

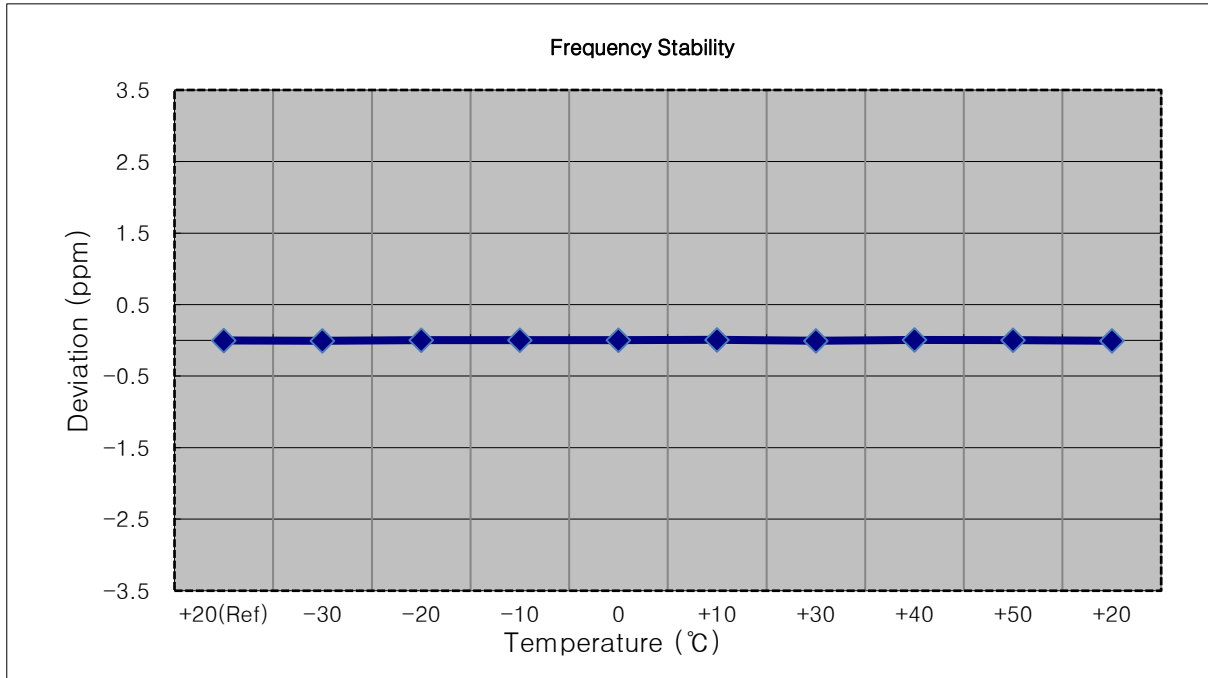


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1732 499 985	0.0	0.000 000	0.000
100 %		-30	1732 499 980	-4.4	0.000 000	-0.003
100 %		-20	1732 499 975	-9.3	-0.000 001	-0.005
100 %		-10	1732 499 969	-15.8	-0.000 001	-0.009
100 %		0	1732 499 991	6.4	0.000 000	0.004
100 %		+10	1732 499 975	-9.5	-0.000 001	-0.005
100 %		+30	1732 499 978	-6.6	0.000 000	-0.004
100 %		+40	1732 499 970	-14.4	-0.000 001	-0.008
100 %		+50	1732 499 990	5.0	0.000 000	0.003
Batt. Endpoint	3.400	+20	1732 499 969	-15.4	-0.000 001	-0.009

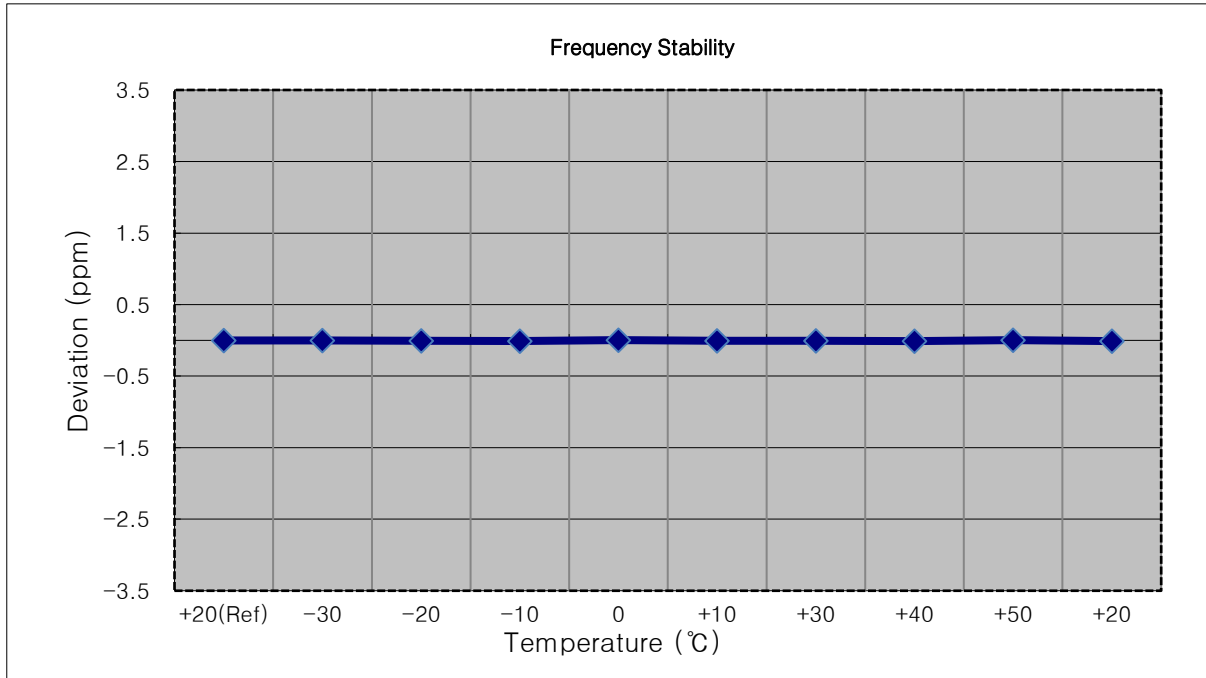


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1732 499 993	0.0	0.000 000	0.000
100 %		-30	1732 500 002	8.9	0.000 001	0.005
100 %		-20	1732 499 980	-12.6	-0.000 001	-0.007
100 %		-10	1732 499 998	4.8	0.000 000	0.003
100 %		0	1732 499 977	-15.8	-0.000 001	-0.009
100 %		+10	1732 499 990	-3.1	0.000 000	-0.002
100 %		+30	1732 499 998	4.5	0.000 000	0.003
100 %		+40	1732 499 981	-11.9	-0.000 001	-0.007
100 %		+50	1732 499 983	-10.3	-0.000 001	-0.006
Batt. Endpoint	3.400	+20	1732 499 977	-15.7	-0.000 001	-0.009

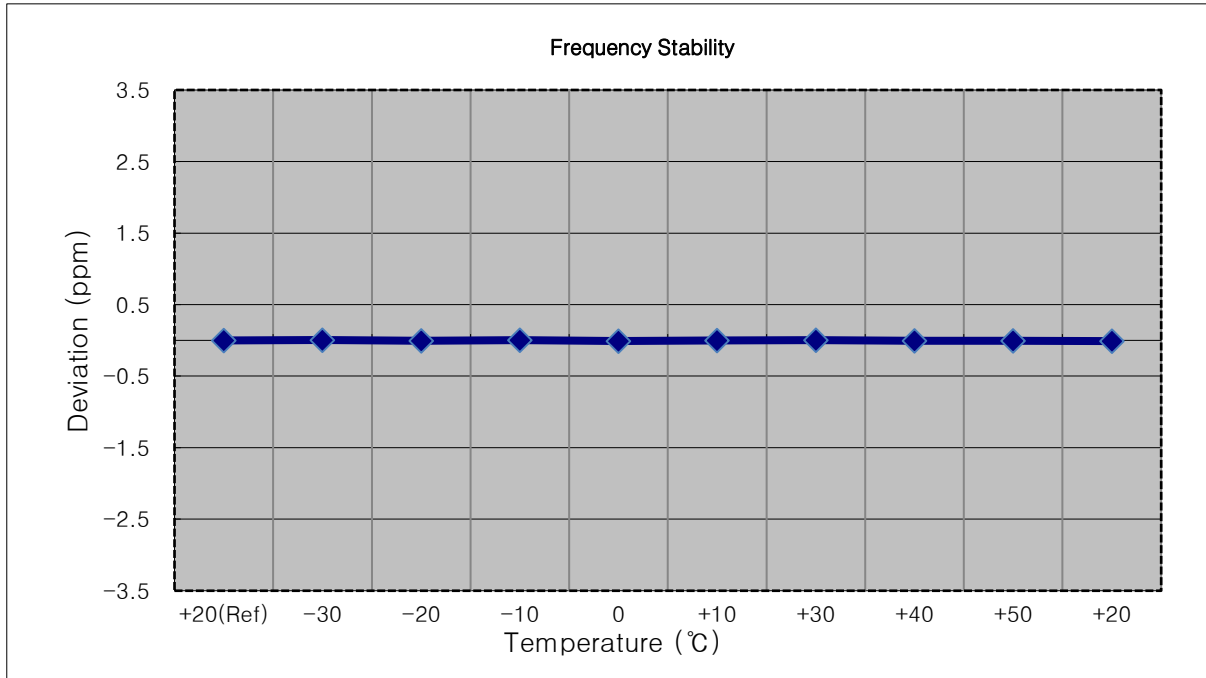


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1732 500 006	0.0	0.000 000	0.000
100 %		-30	1732 499 999	-6.5	0.000 000	-0.004
100 %		-20	1732 499 998	-7.5	0.000 000	-0.004
100 %		-10	1732 500 014	8.4	0.000 000	0.005
100 %		0	1732 500 013	7.6	0.000 000	0.004
100 %		+10	1732 500 011	5.7	0.000 000	0.003
100 %		+30	1732 499 995	-10.8	-0.000 001	-0.006
100 %		+40	1732 500 002	-3.8	0.000 000	-0.002
100 %		+50	1732 499 995	-10.9	-0.000 001	-0.006
Batt. Endpoint	3.400	+20	1732 499 996	-9.4	-0.000 001	-0.005

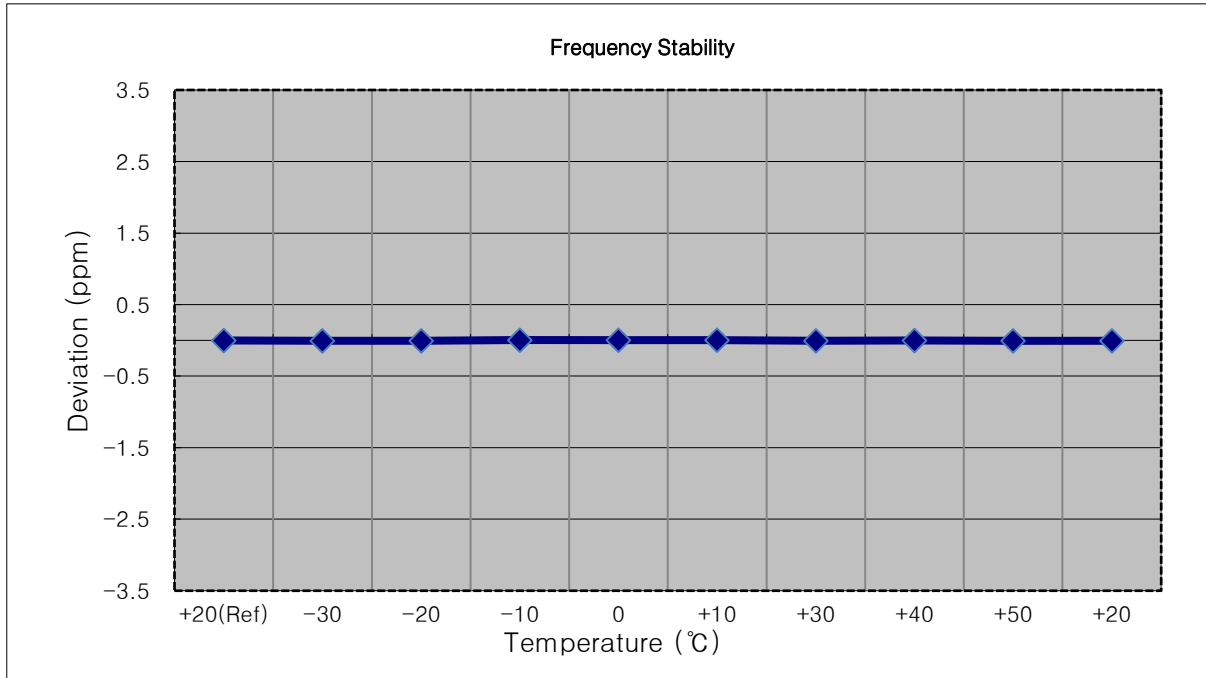


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1732 499 990	0.0	0.000 000	0.000
100 %		-30	1732 499 978	-11.8	-0.000 001	-0.007
100 %		-20	1732 499 981	-9.0	-0.000 001	-0.005
100 %		-10	1732 499 981	-8.7	-0.000 001	-0.005
100 %		0	1732 499 995	4.9	0.000 000	0.003
100 %		+10	1732 499 997	7.0	0.000 000	0.004
100 %		+30	1732 499 984	-5.9	0.000 000	-0.003
100 %		+40	1732 499 982	-7.9	0.000 000	-0.005
100 %		+50	1732 499 999	9.2	0.000 001	0.005
Batt. Endpoint	3.400	+20	1732 499 985	-5.4	0.000 000	-0.003

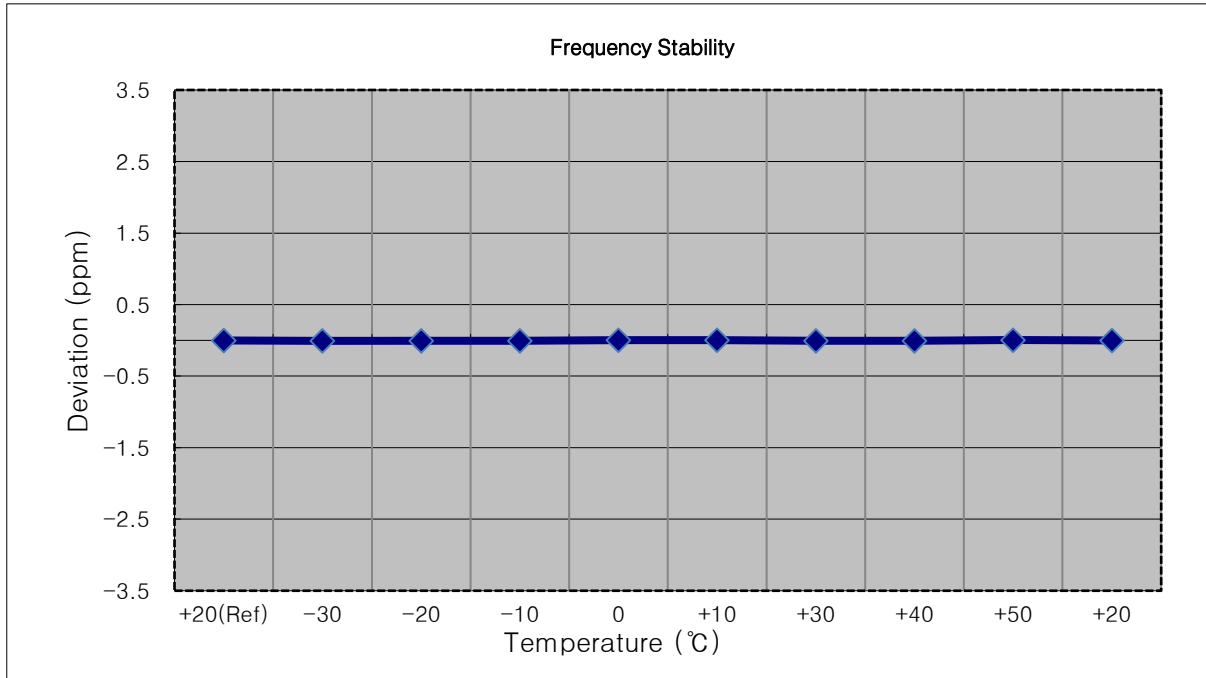


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1732 499 991	0.0	0.000 000	0.000
100 %		-30	1732 500 000	9.3	0.000 001	0.005
100 %		-20	1732 500 001	10.0	0.000 001	0.006
100 %		-10	1732 499 983	-7.3	0.000 000	-0.004
100 %		0	1732 499 998	6.8	0.000 000	0.004
100 %		+10	1732 500 003	12.0	0.000 001	0.007
100 %		+30	1732 499 999	8.6	0.000 000	0.005
100 %		+40	1732 500 000	8.9	0.000 001	0.005
100 %		+50	1732 499 984	-7.0	0.000 000	-0.004
Batt. Endpoint	3.400	+20	1732 500 001	9.8	0.000 001	0.006

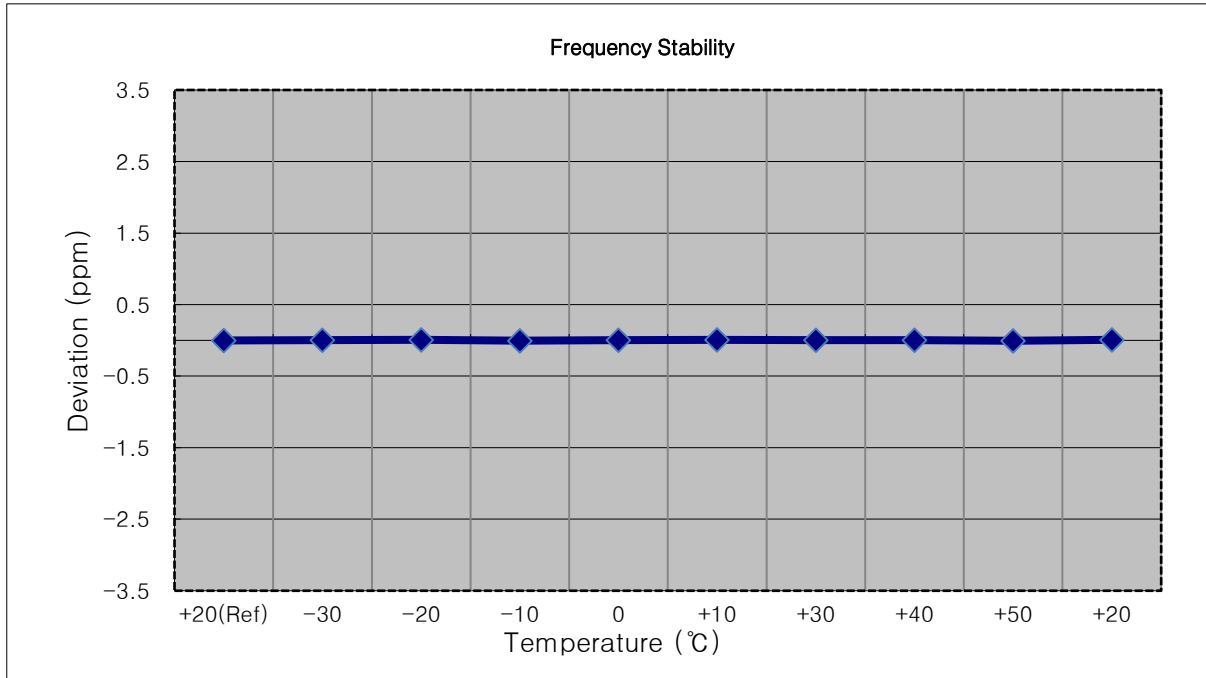

- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1754,300,000 Hz
- ▣ CHANNEL: 20393 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1754 299 989	0.0	0.000 000	0.000
100 %		-30	1754 299 975	-13.7	-0.000 001	-0.008
100 %		-20	1754 299 978	-10.4	-0.000 001	-0.006
100 %		-10	1754 299 977	-11.5	-0.000 001	-0.007
100 %		0	1754 299 993	4.0	0.000 000	0.002
100 %		+10	1754 299 978	-10.5	-0.000 001	-0.006
100 %		+30	1754 299 999	10.4	0.000 001	0.006
100 %		+40	1754 299 993	4.6	0.000 000	0.003
100 %		+50	1754 299 998	8.9	0.000 001	0.005
Batt. Endpoint	3.400	+20	1754 300 001	12.4	0.000 001	0.007

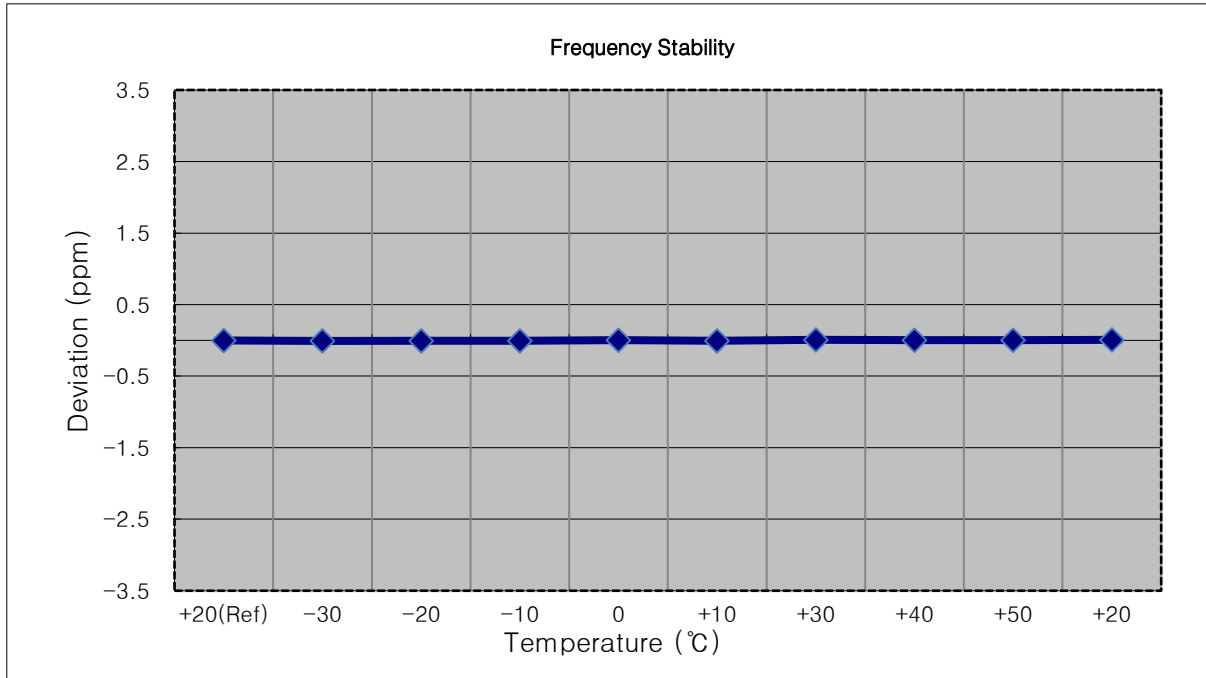




- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1753,500,000 Hz
- ▣ CHANNEL: 20385 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1753 500 017	0.0	0.000 000	0.000
100 %		-30	1753 500 025	8.5	0.000 000	0.005
100 %		-20	1753 500 027	10.8	0.000 001	0.006
100 %		-10	1753 500 002	-14.2	-0.000 001	-0.008
100 %		0	1753 500 001	-15.3	-0.000 001	-0.009
100 %		+10	1753 499 996	-20.7	-0.000 001	-0.012
100 %		+30	1753 500 000	-16.7	-0.000 001	-0.010
100 %		+40	1753 500 003	-14.1	-0.000 001	-0.008
100 %		+50	1753 500 010	-6.7	0.000 000	-0.004
Batt. Endpoint	3.400	+20	1753 500 100	83.3	0.000 005	0.048

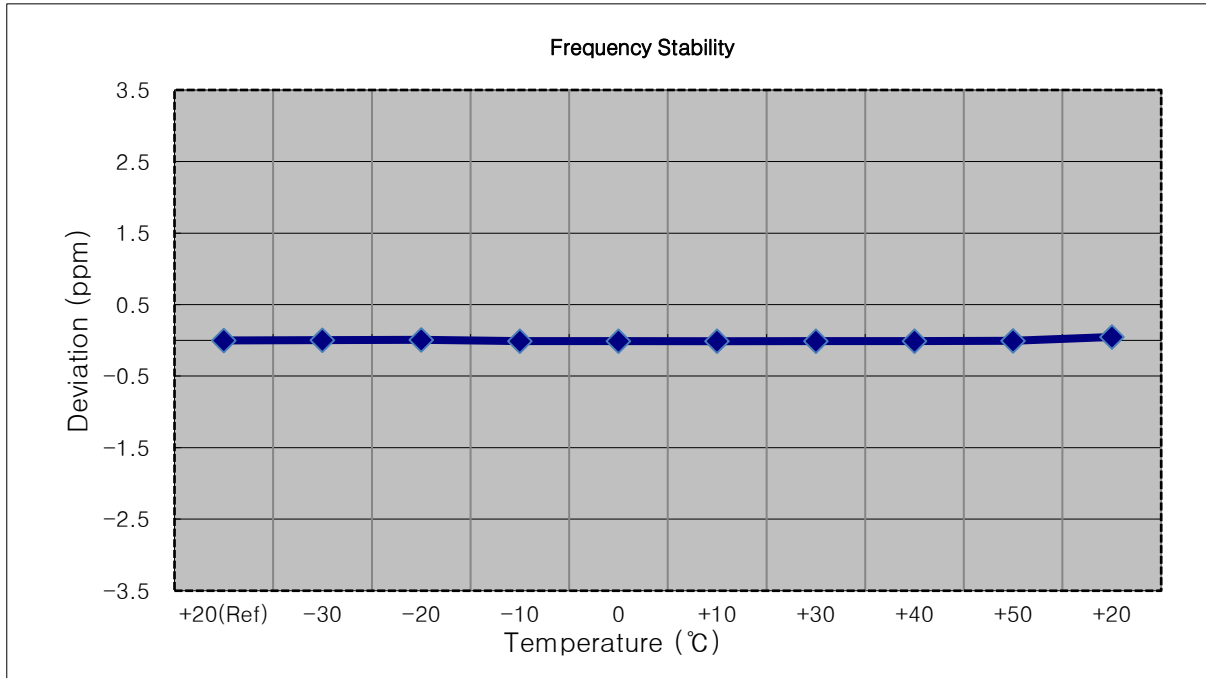


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1752,500,000 Hz
- ▣ CHANNEL: 20375 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1752 499 998	0.0	0.000 000	0.000
100 %		-30	1752 499 987	-10.2	-0.000 001	-0.006
100 %		-20	1752 499 984	-14.0	-0.000 001	-0.008
100 %		-10	1752 499 987	-10.8	-0.000 001	-0.006
100 %		0	1752 500 000	2.0	0.000 000	0.001
100 %		+10	1752 500 004	6.3	0.000 000	0.004
100 %		+30	1752 499 988	-9.2	-0.000 001	-0.005
100 %		+40	1752 499 988	-9.9	-0.000 001	-0.006
100 %		+50	1752 499 989	-9.0	-0.000 001	-0.005
Batt. Endpoint	3.400	+20	1752 499 988	-9.4	-0.000 001	-0.005

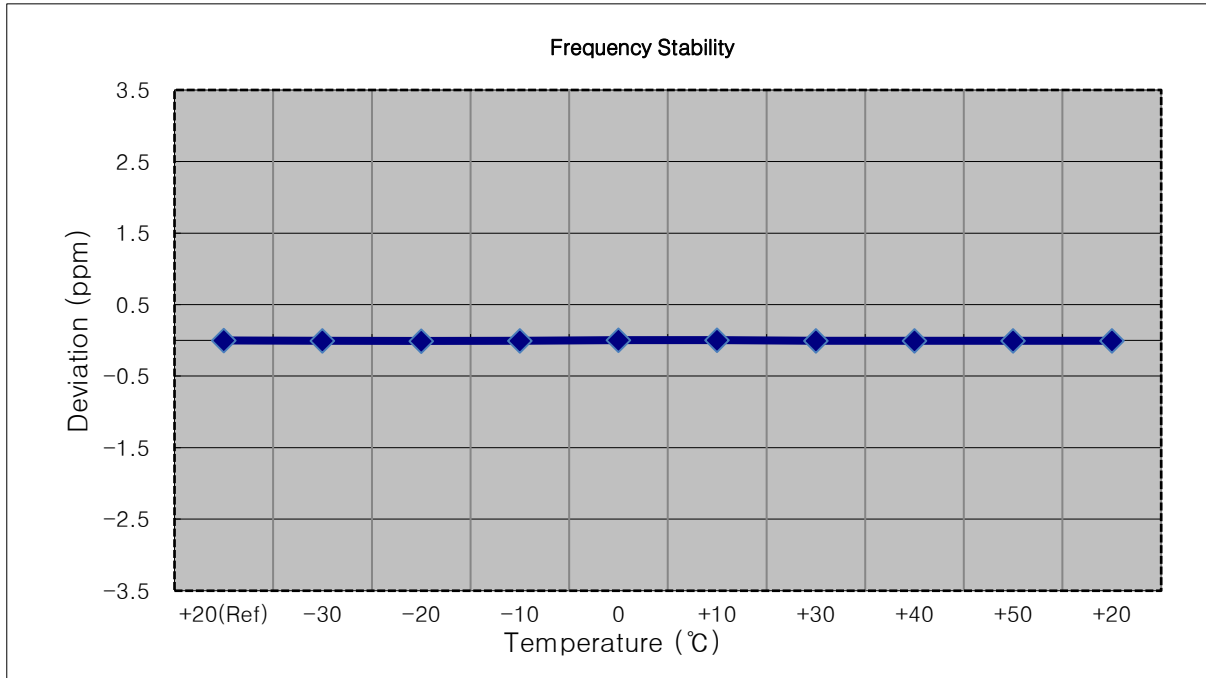


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1750,000,000 Hz
- ▣ CHANNEL: 20350 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1749 999 992	0.0	0.000 000	0.000
100 %		-30	1749 999 995	3.8	0.000 000	0.002
100 %		-20	1749 999 983	-9.1	-0.000 001	-0.005
100 %		-10	1749 999 999	6.9	0.000 000	0.004
100 %		0	1749 999 987	-4.6	0.000 000	-0.003
100 %		+10	1749 999 995	3.7	0.000 000	0.002
100 %		+30	1749 999 980	-11.4	-0.000 001	-0.007
100 %		+40	1749 999 983	-8.4	0.000 000	-0.005
100 %		+50	1749 999 995	3.7	0.000 000	0.002
Batt. Endpoint		3.400	+20	1749 999 983	-8.3	0.000 000

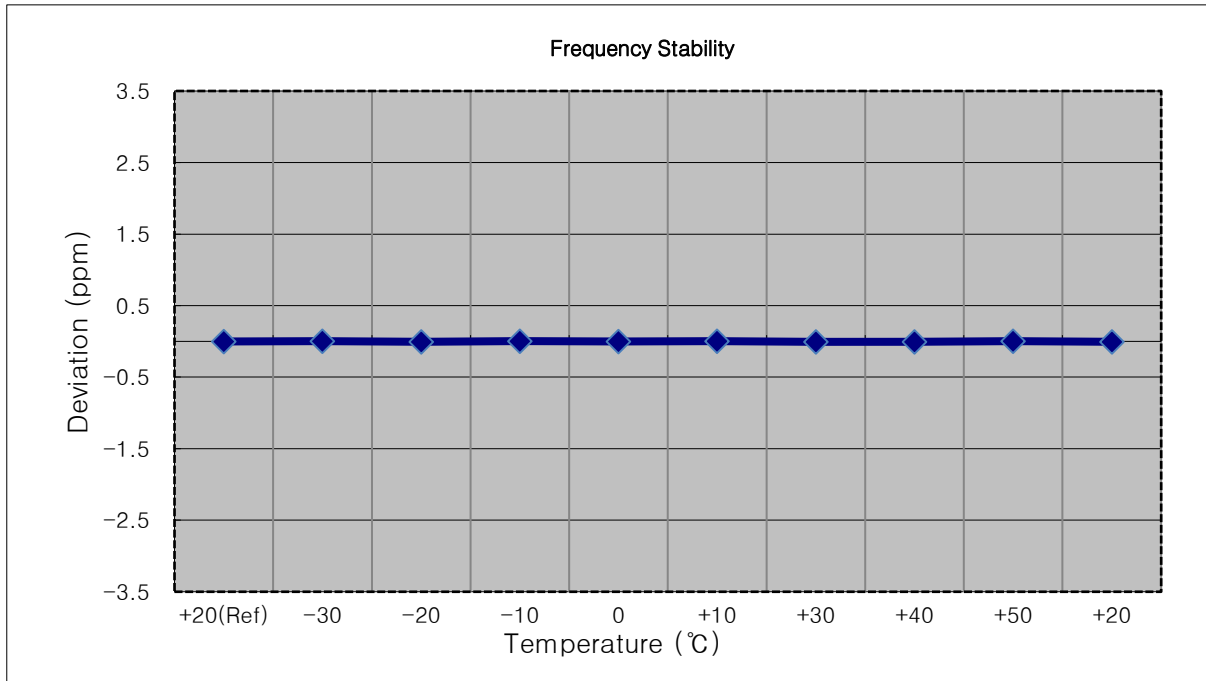


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1747,500,000 Hz
- ▣ CHANNEL: 20325 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1747 499 992	0.0	0.000 000	0.000
100 %		-30	1747 499 983	-9.5	-0.000 001	-0.005
100 %		-20	1747 499 985	-7.3	0.000 000	-0.004
100 %		-10	1747 499 997	4.8	0.000 000	0.003
100 %		0	1747 499 980	-12.0	-0.000 001	-0.007
100 %		+10	1747 499 999	7.1	0.000 000	0.004
100 %		+30	1747 499 987	-5.0	0.000 000	-0.003
100 %		+40	1747 499 988	-4.5	0.000 000	-0.003
100 %		+50	1747 499 997	4.4	0.000 000	0.003
Batt. Endpoint		3.400	+20	1747 499 996	4.1	0.000 000

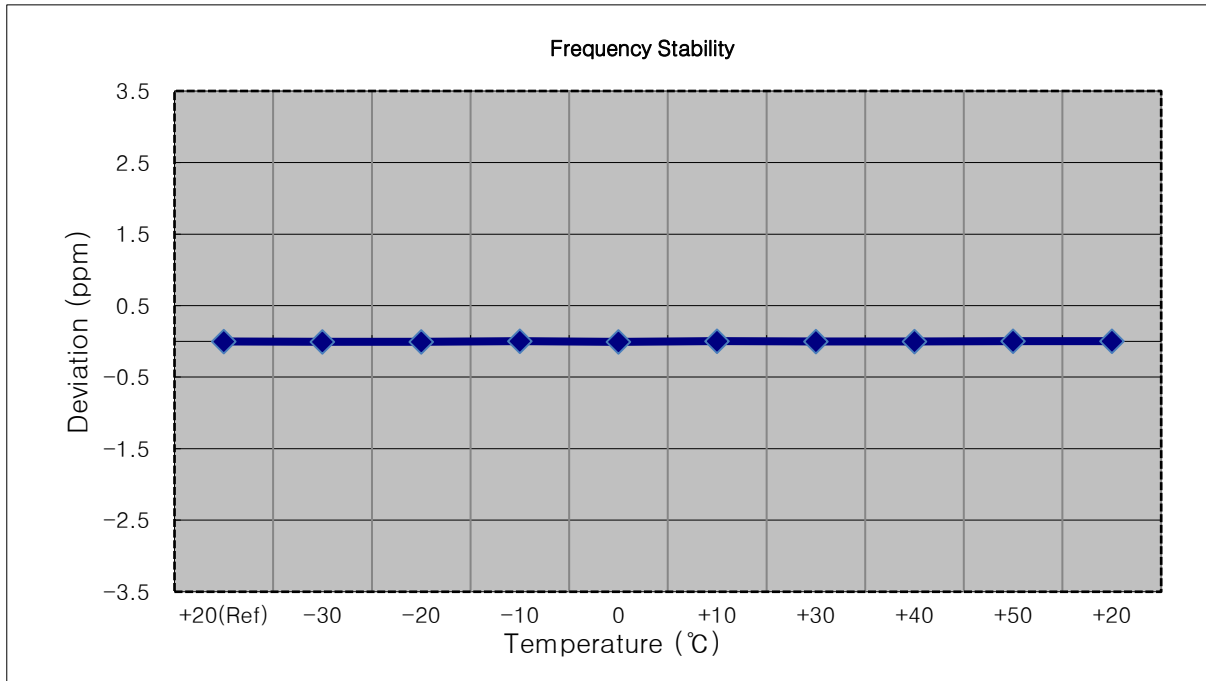

- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 20300 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1745 000 003	0.0	0.000 000	0.000
100 %		-30	1744 999 990	-13.8	-0.000 001	-0.008
100 %		-20	1744 999 995	-8.9	-0.000 001	-0.005
100 %		-10	1744 999 994	-9.8	-0.000 001	-0.006
100 %		0	1744 999 993	-10.8	-0.000 001	-0.006
100 %		+10	1744 999 999	-4.4	0.000 000	-0.003
100 %		+30	1745 000 006	2.6	0.000 000	0.001
100 %		+40	1744 999 991	-12.5	-0.000 001	-0.007
100 %		+50	1744 999 989	-14.5	-0.000 001	-0.008
Batt. Endpoint	3.400	+20	1744 999 994	-9.6	-0.000 001	-0.006

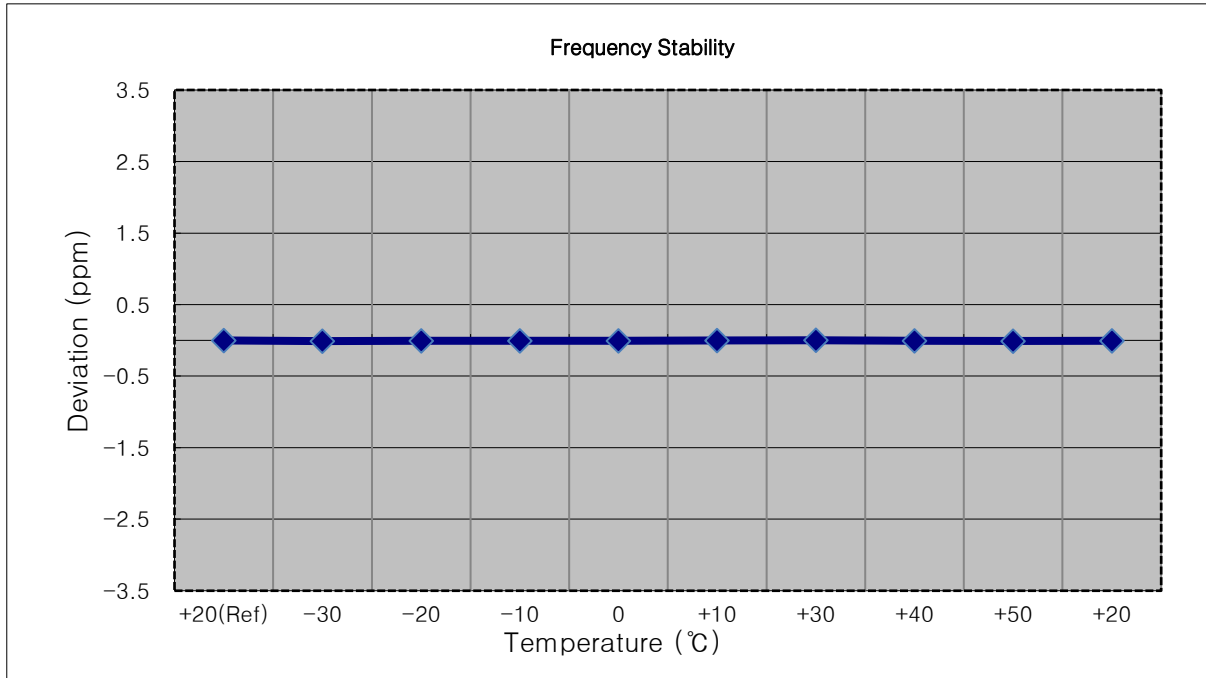

## 10. TEST PLOTS (Main 2 Ant)

BW1.4 M\_BandEdge\_Lowest Channel\_QPSK\_FullRB(1)



BW1.4 M\_BandEdge\_Lowest Channel\_QPSK\_FullRB(2)






BW1.4 M\_BandEdge\_Highest Channel\_QPSK\_FullIRB(1)



BW1.4 M\_BandEdge\_Highest Channel\_QPSK\_FullIRB(2)

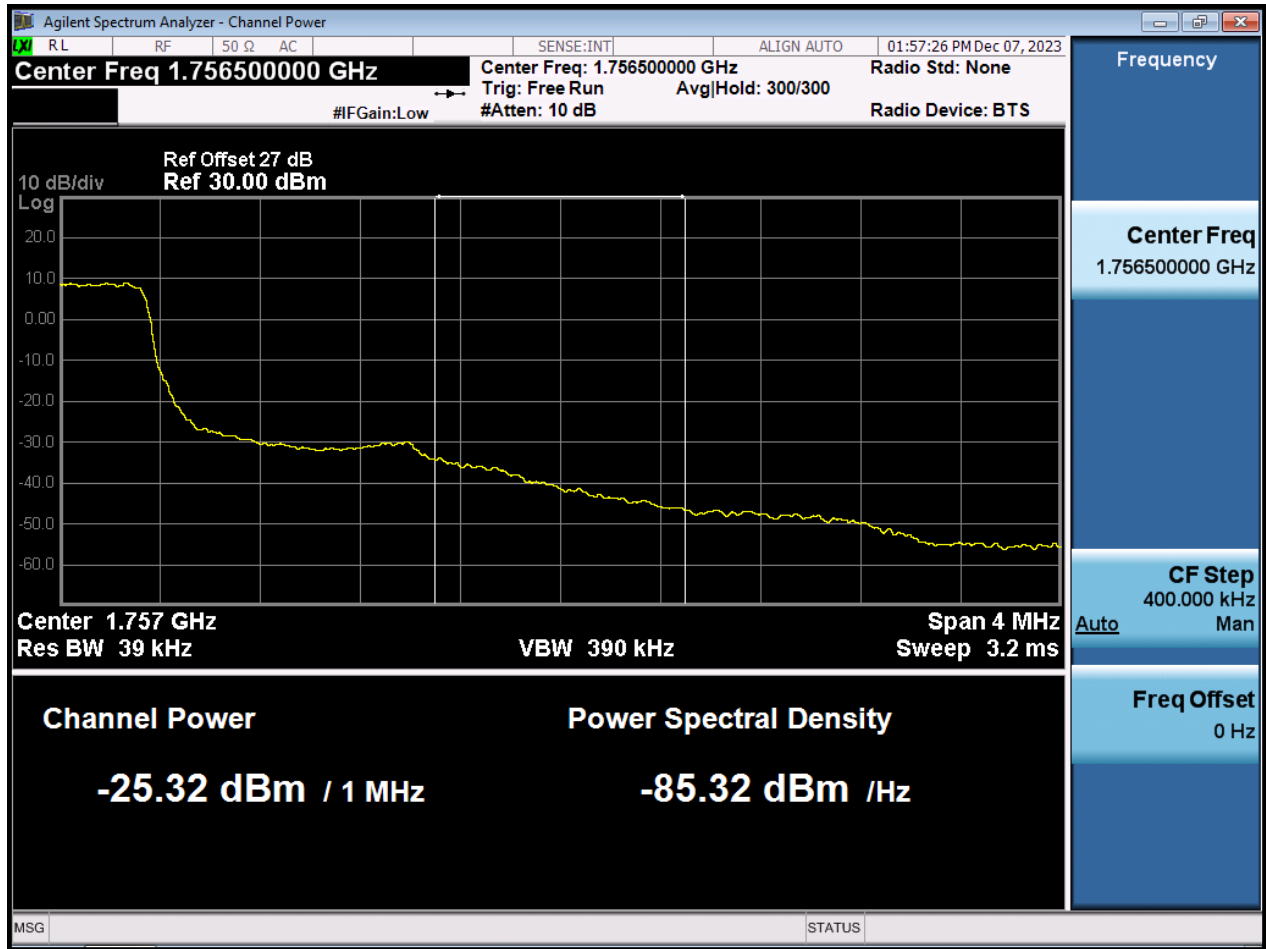

BW1.4 M\_BandEdge\_Lowest Channel\_QPSK\_1RB




BW1.4 M\_BandEdge\_Highest Channel\_QPSK\_1RB



BW3 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(1)




BW3 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(2)

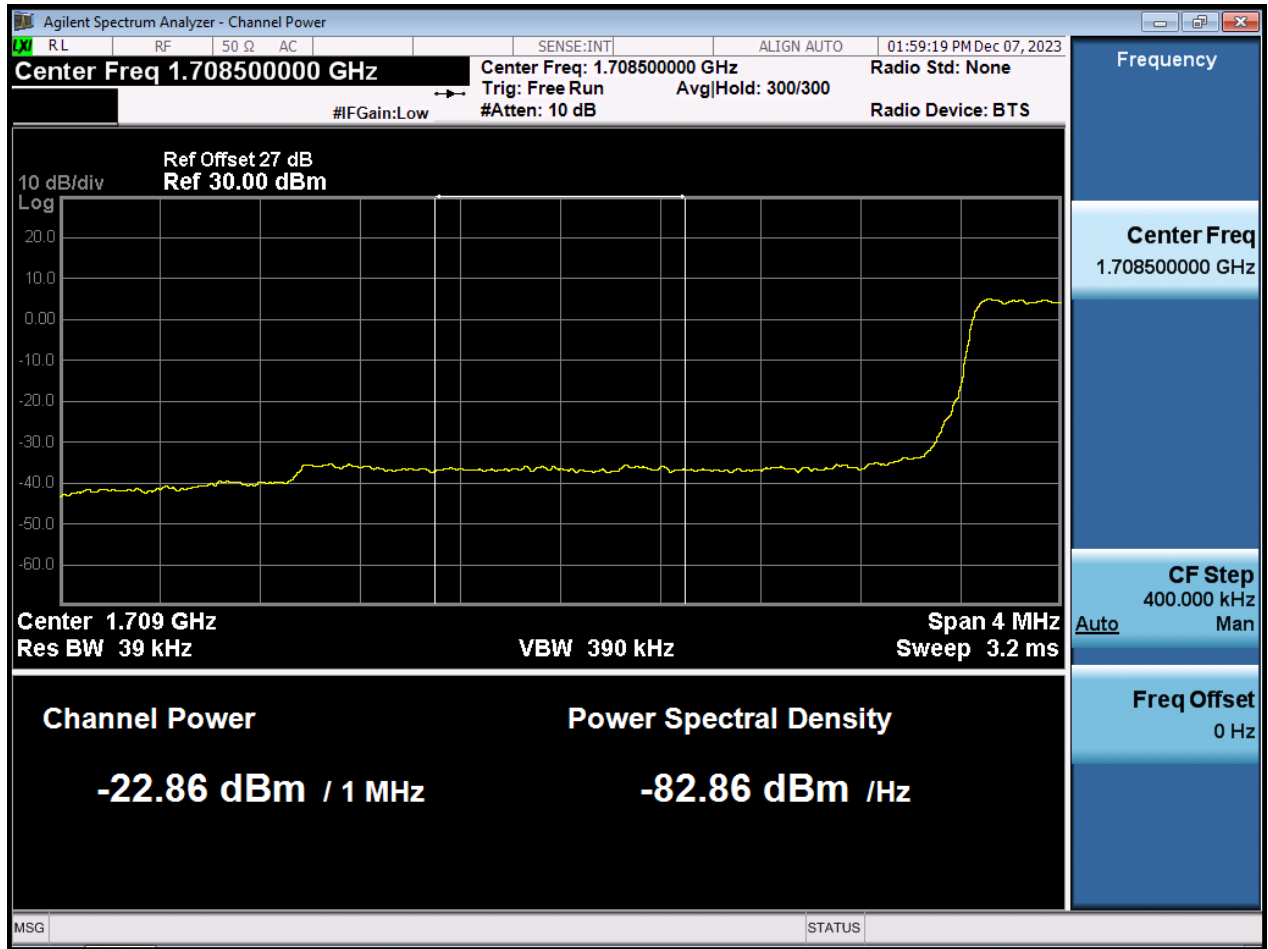

BW3 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)



BW3 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

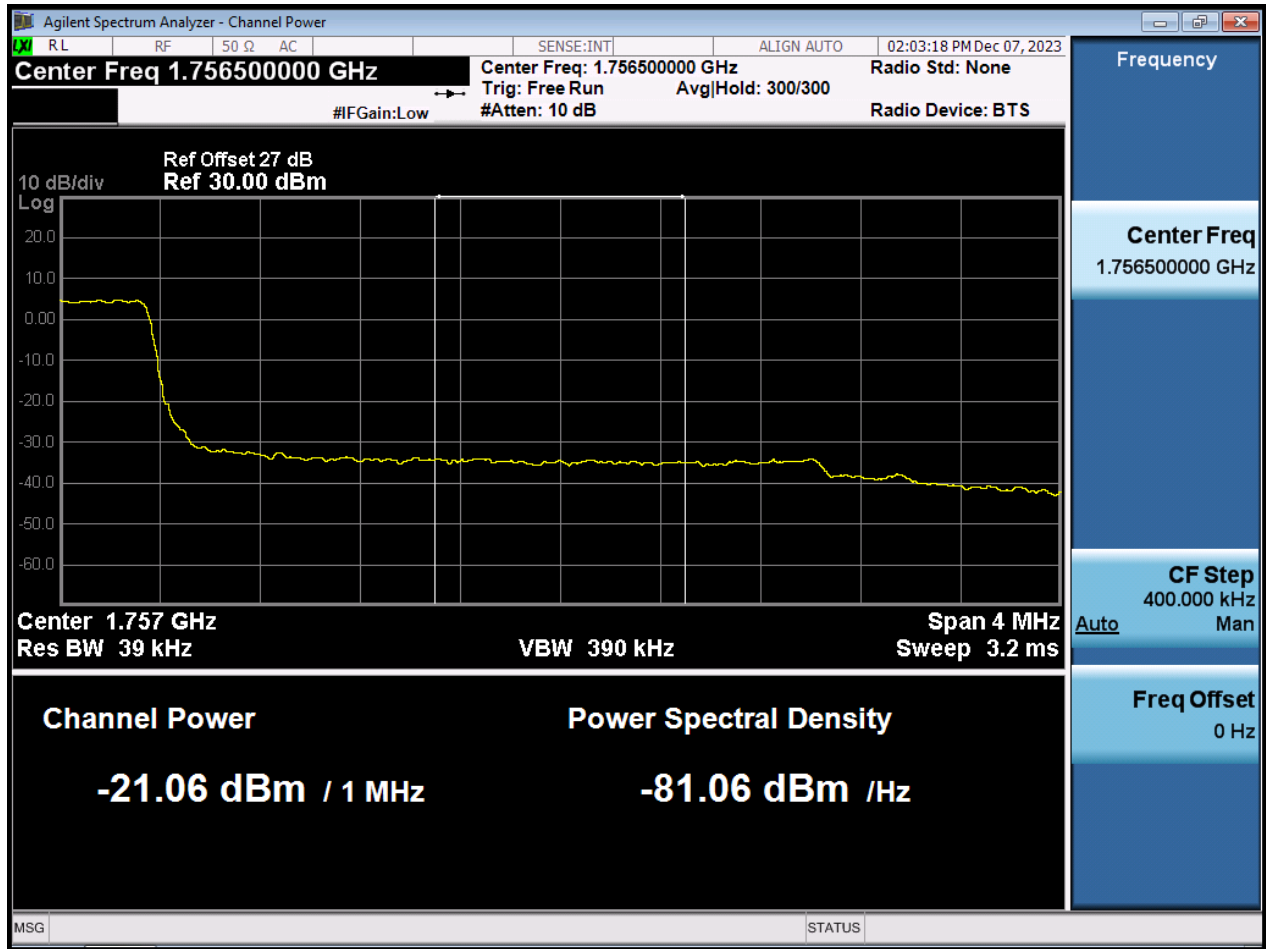



BW3 M\_BandEdge\_Lowest Channel\_QPSK\_1RB




BW3 M\_BandEdge\_Highest Channel\_QPSK\_1RB




BW5 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(1)




BW5 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(2)

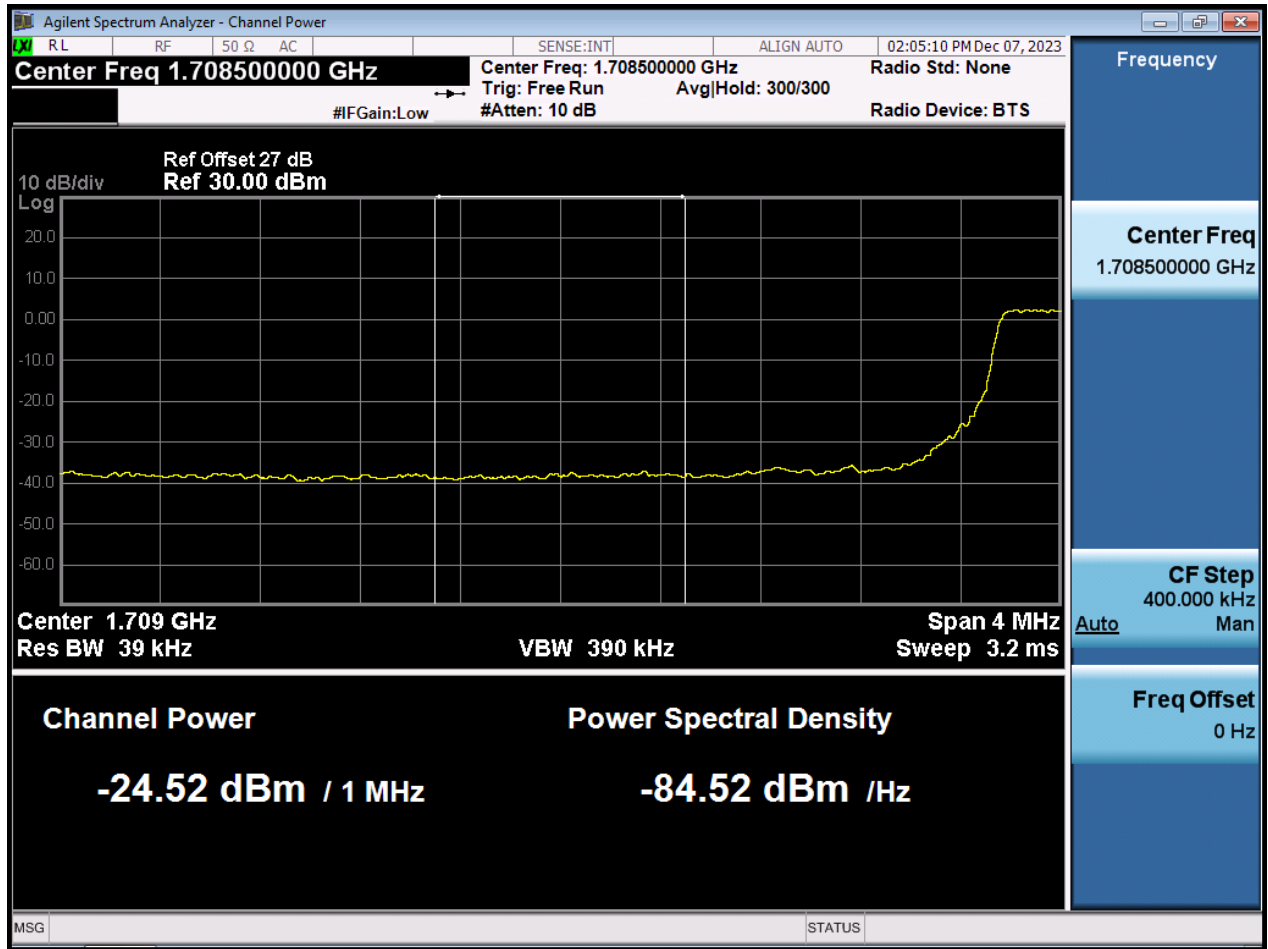


BW5 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)

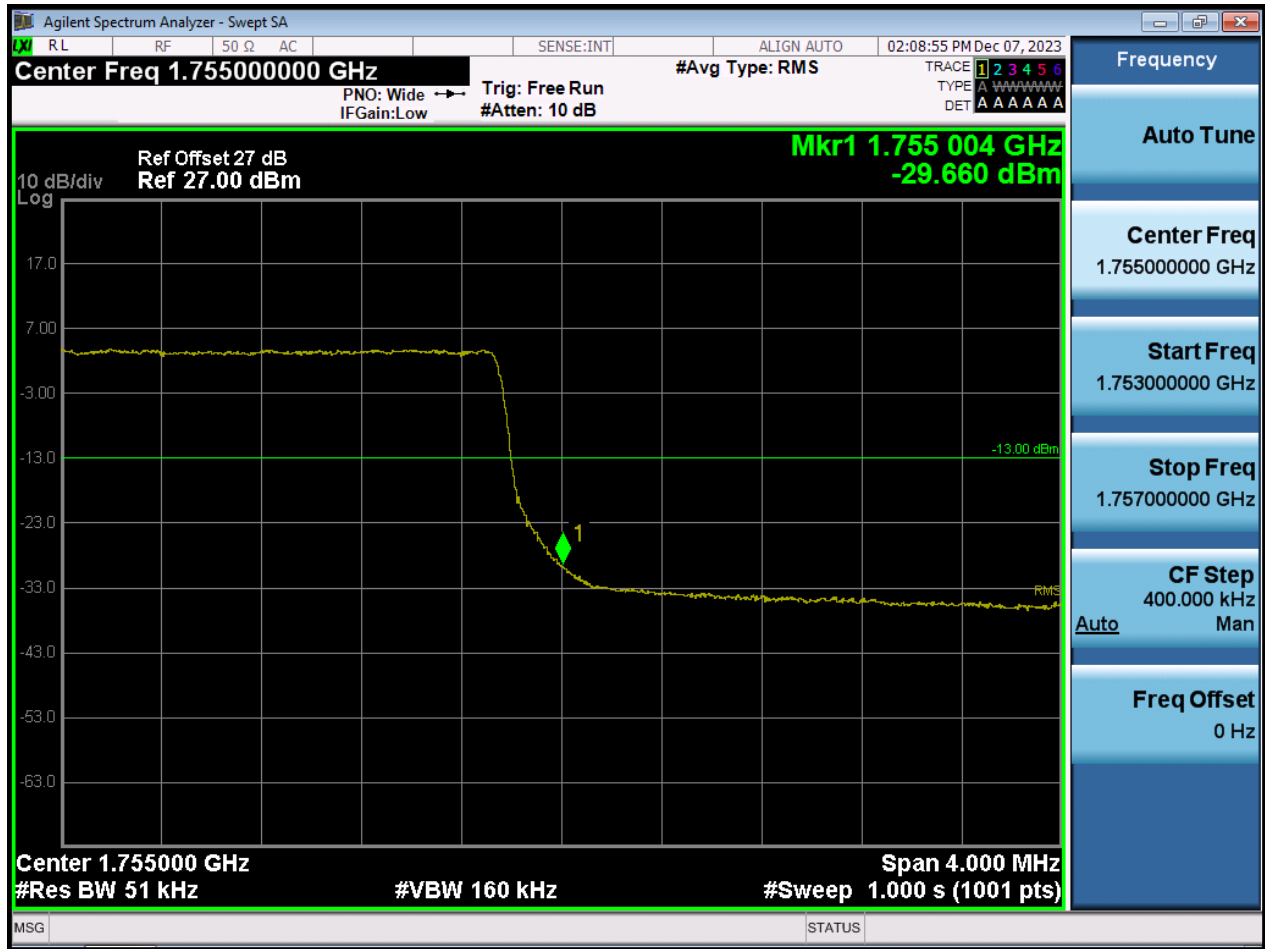

BW5 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

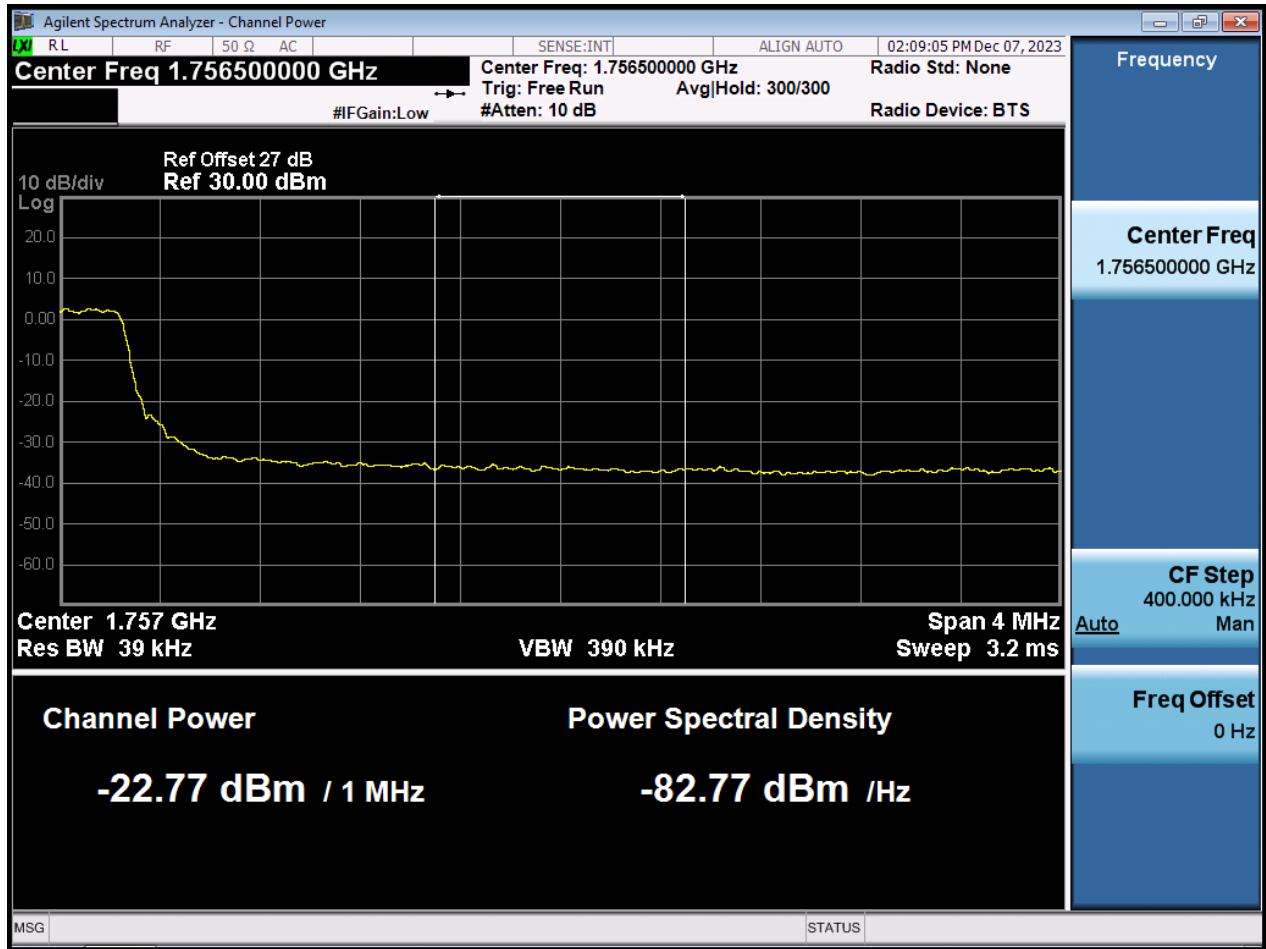

BW5 M\_BandEdge\_Lowest Channel\_QPSK\_1RB

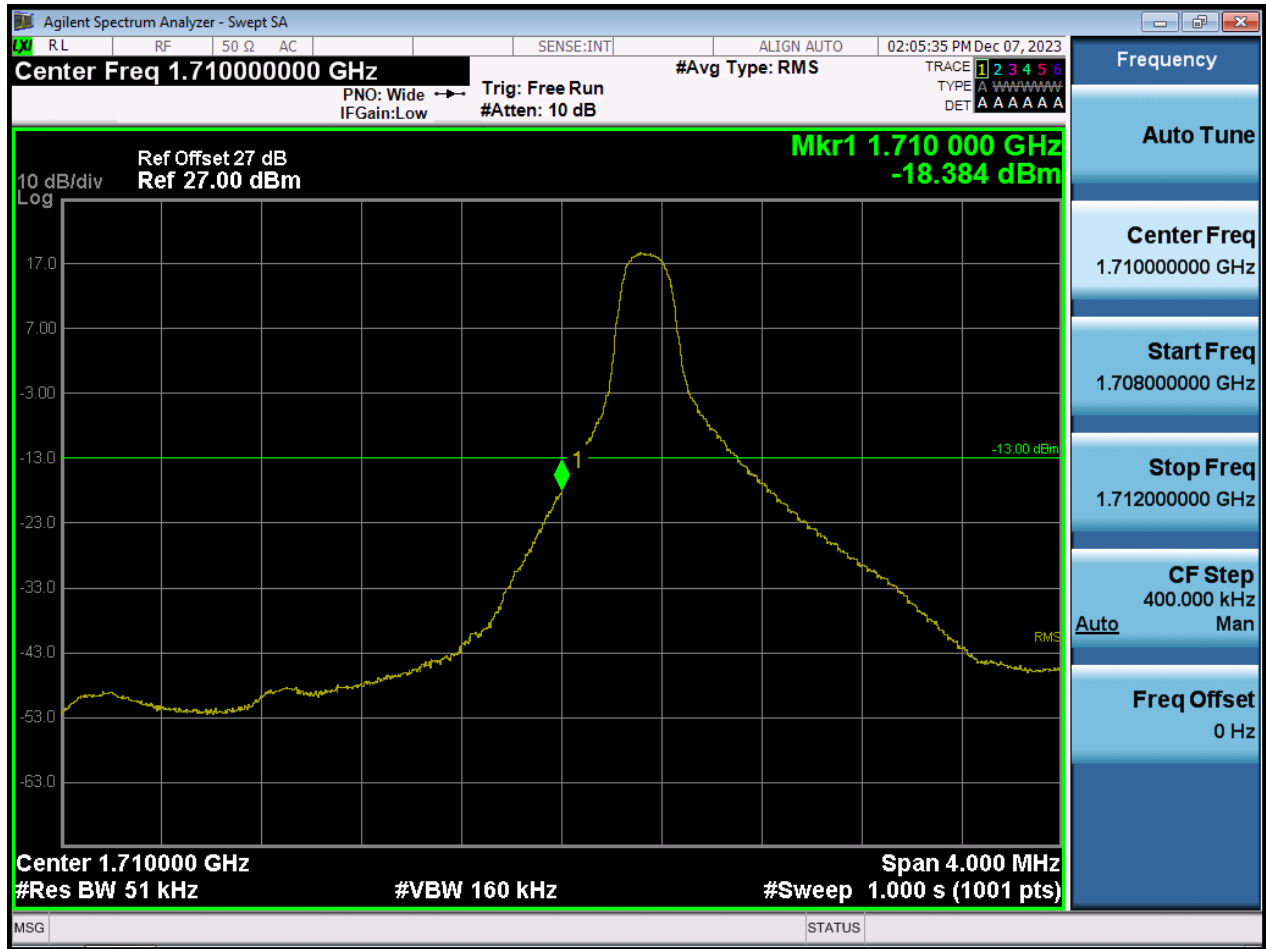

BW5 M\_BandEdge\_Highest Channel\_QPSK\_1RB







BW10 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(1)




BW10 M\_BandEdge\_Lowest Channel\_QPSK\_FullRB(2)

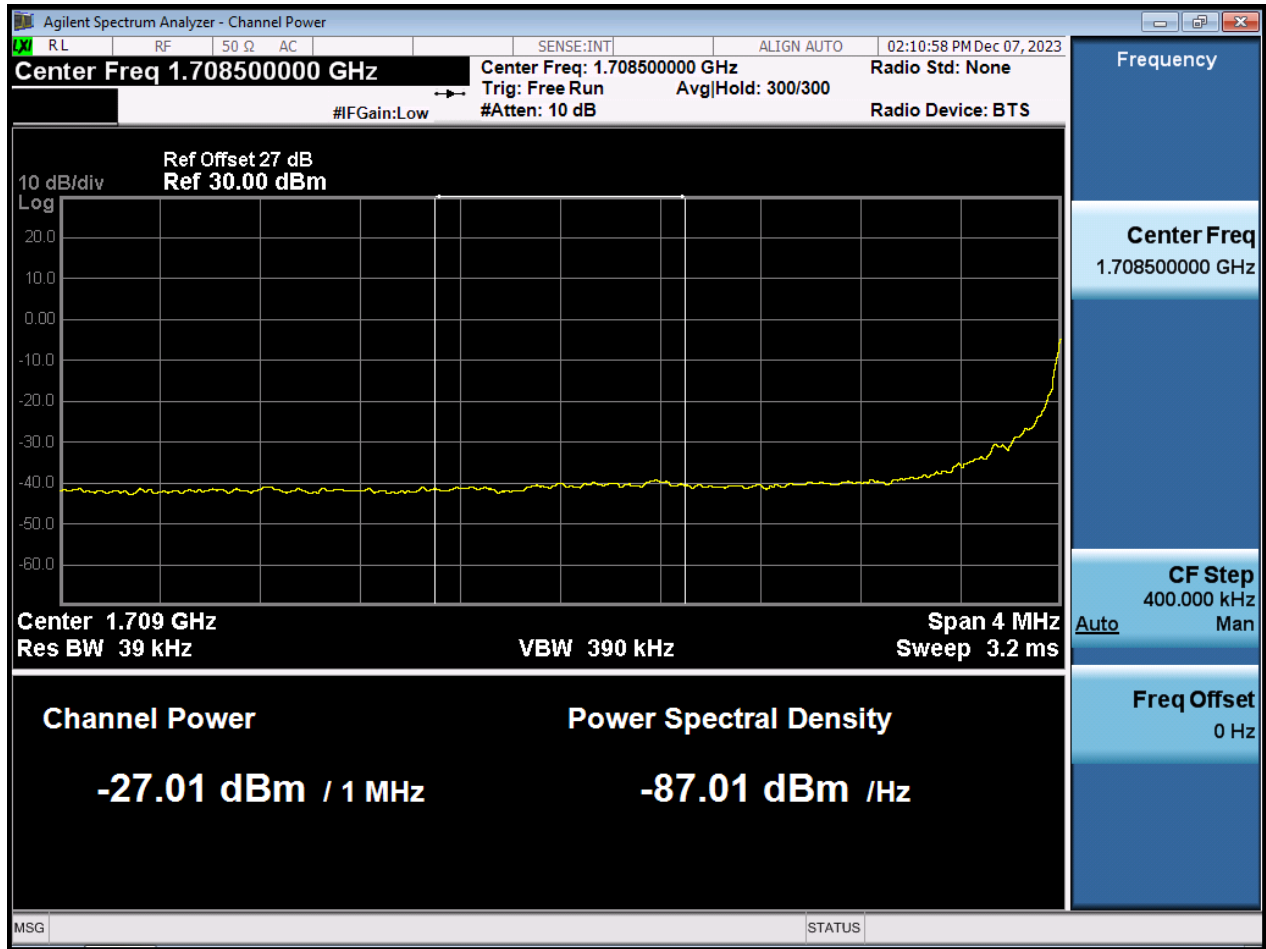

BW10 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)

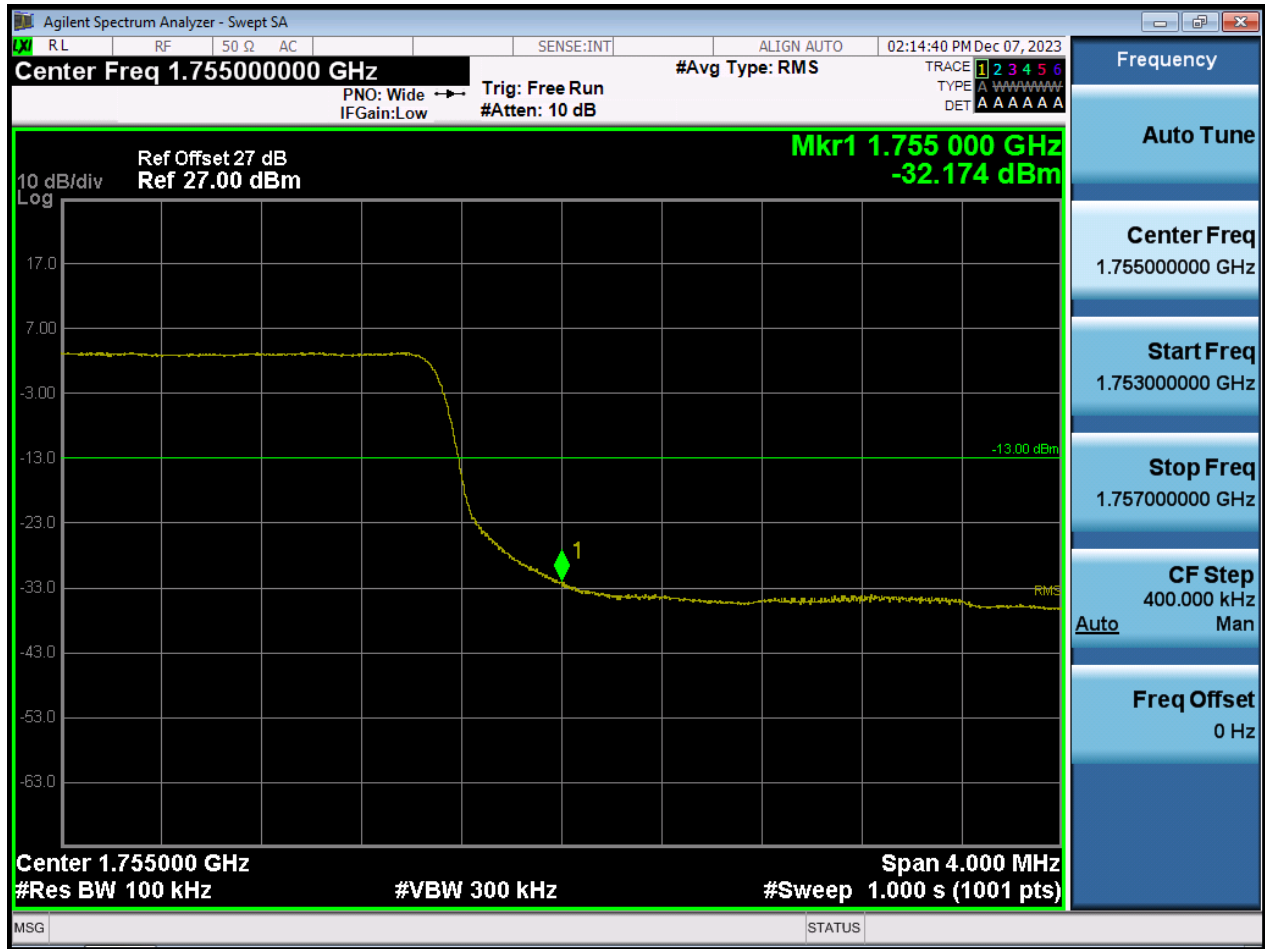

BW10 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

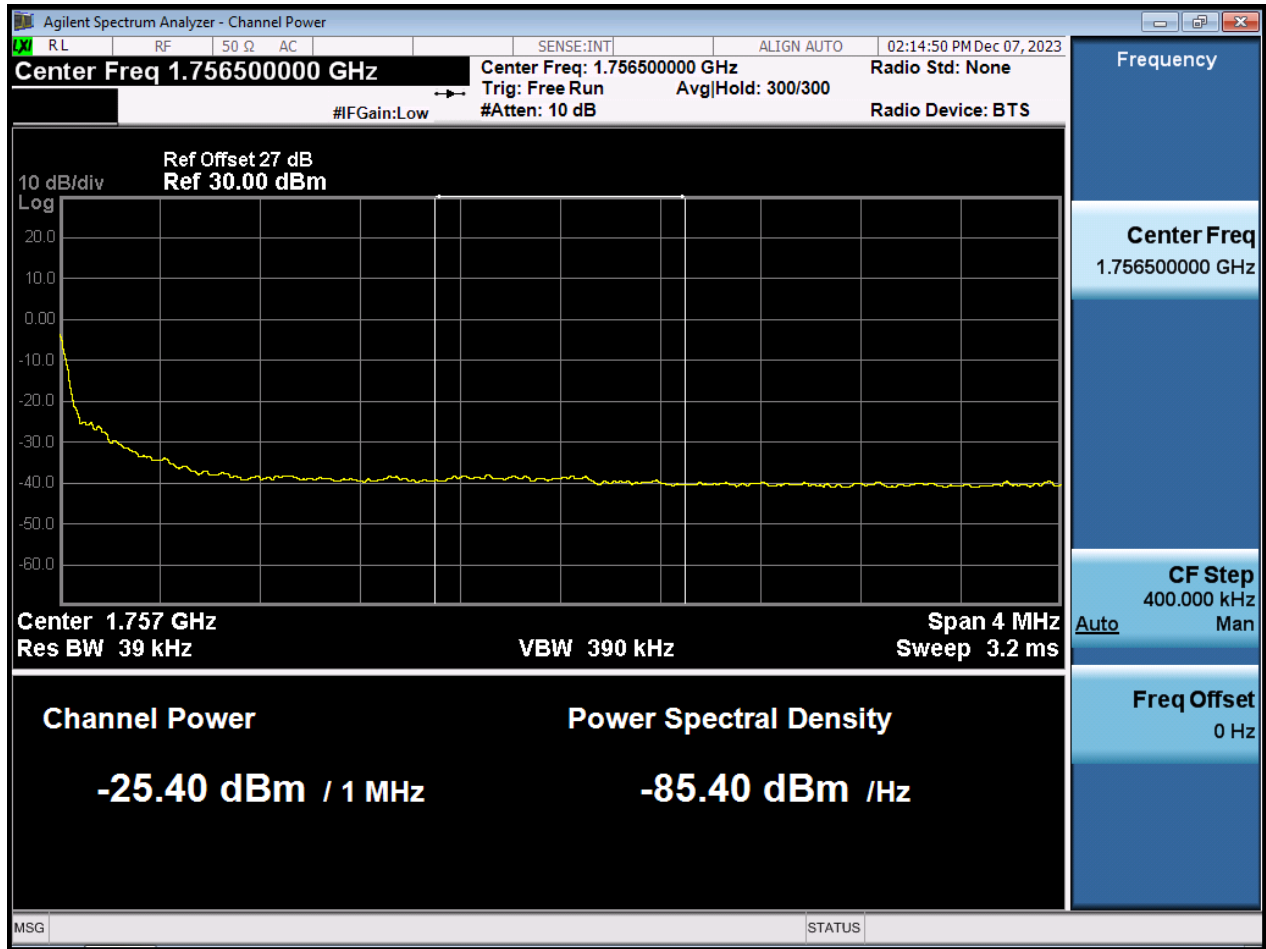

BW10 M\_BandEdge\_Lowest Channel\_QPSK\_1RB




BW10 M\_BandEdge\_Highest Channel\_QPSK\_1RB



BW15 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(1)



BW15 M\_BandEdge\_Lowest Channel\_QPSK\_FullRB(2)

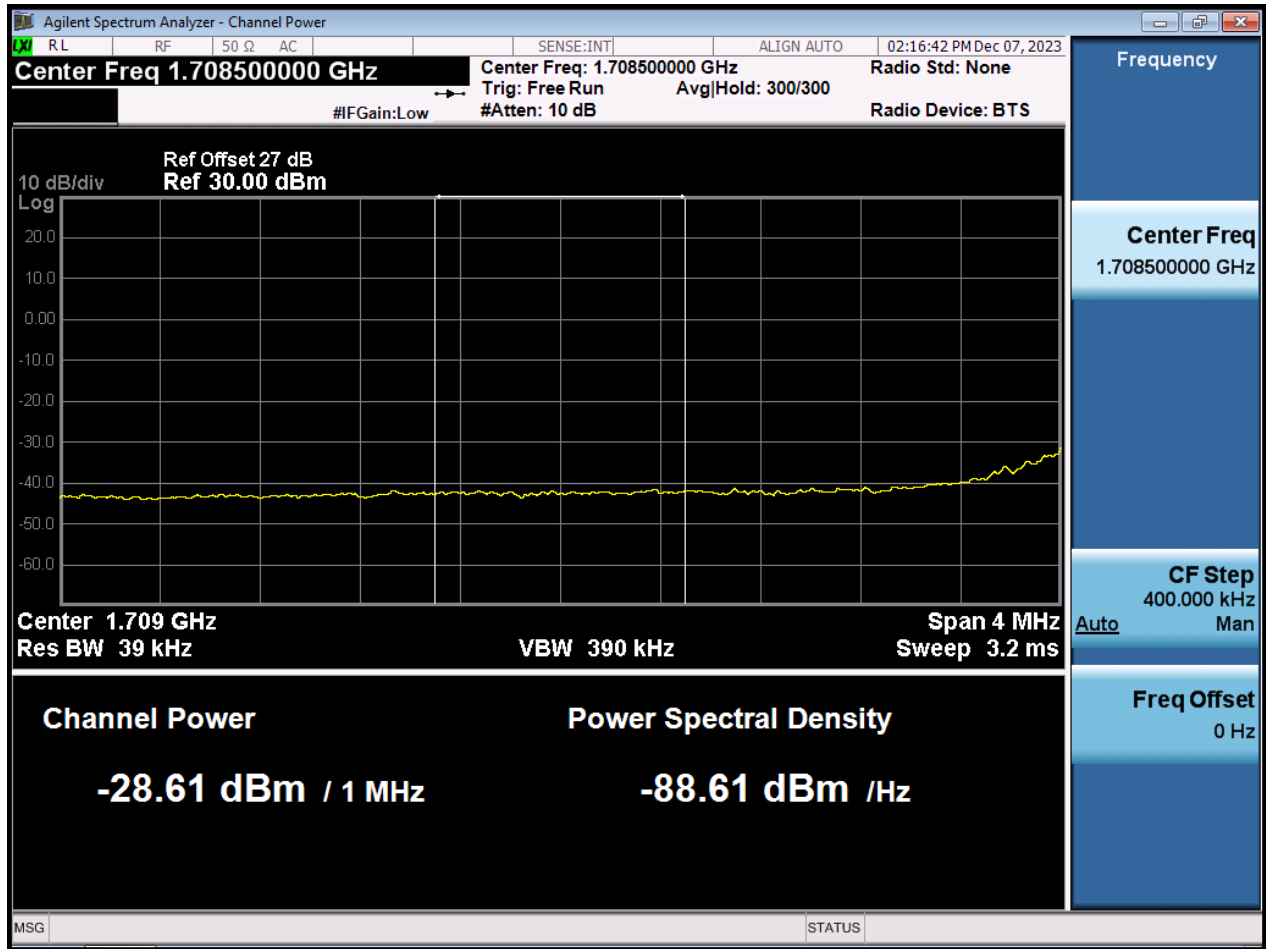





BW15 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)



BW15 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

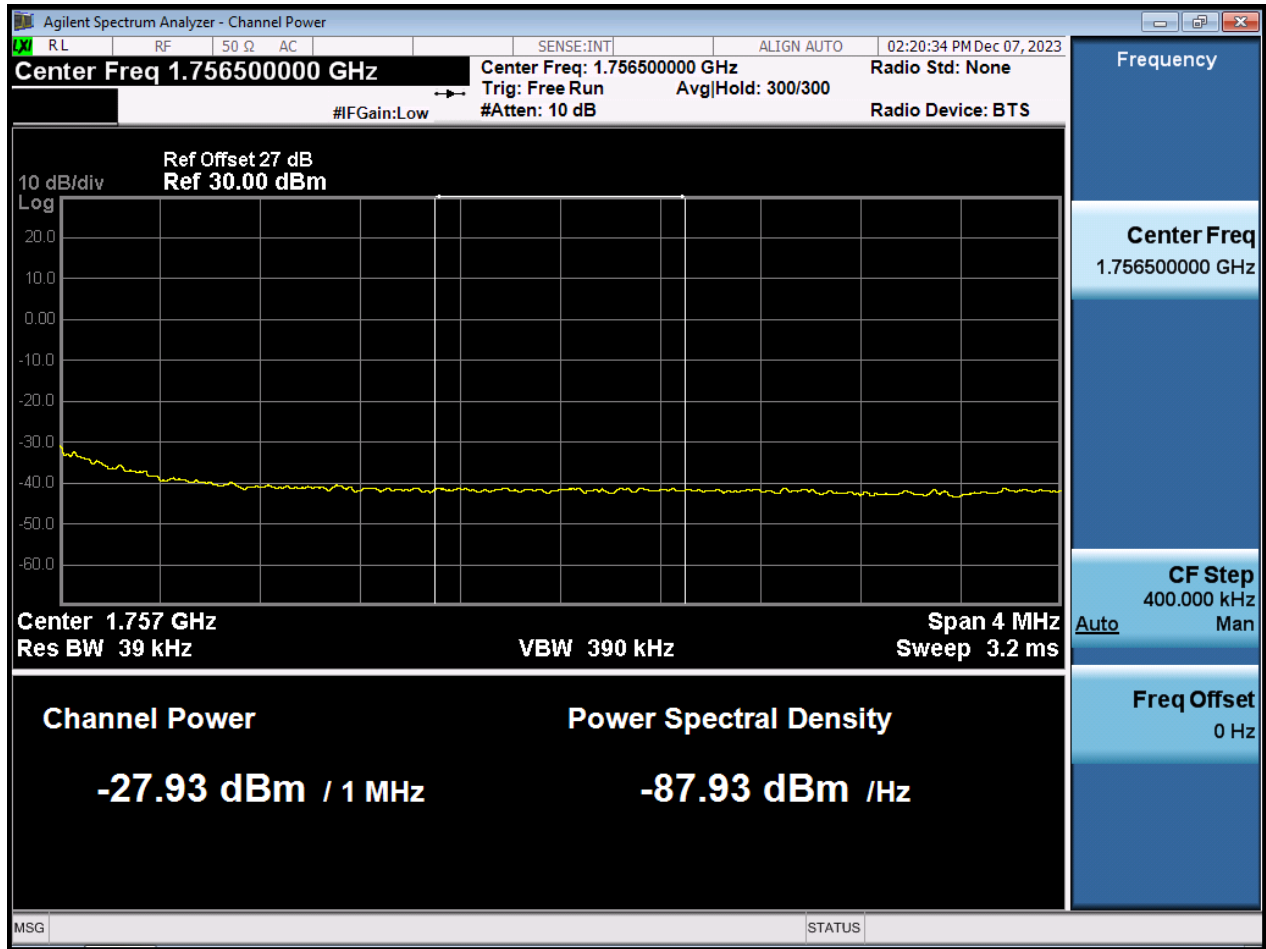

BW15 M\_BandEdge\_Lowest Channel\_QPSK\_1RB

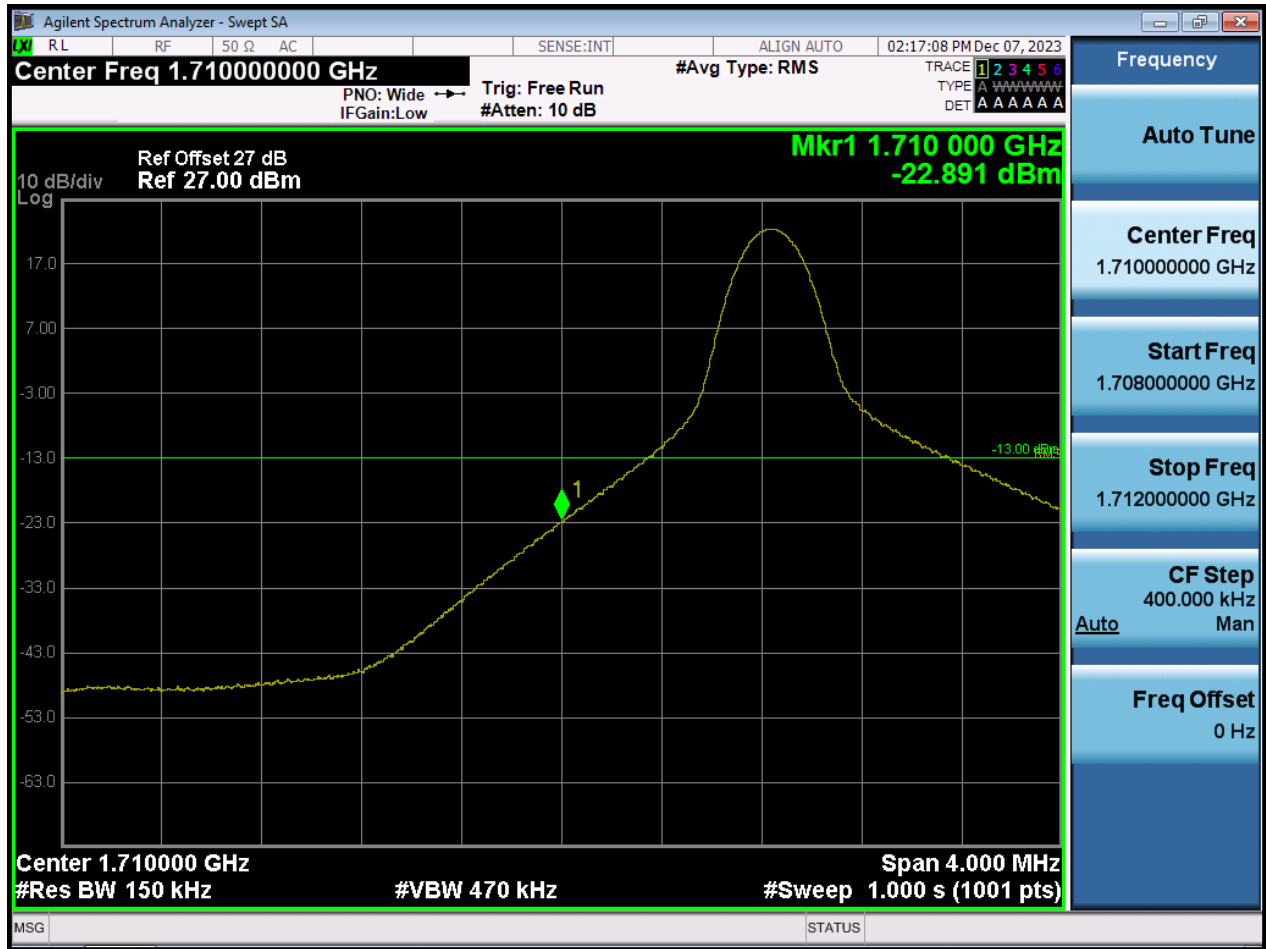


BW15 M\_BandEdge\_Highest Channel\_QPSK\_1RB



BW20 M\_BandEdge\_Lowest Channel\_QPSK\_FullIRB(1)




BW20 M\_BandEdge\_Lowest Channel\_QPSK\_FullRB(2)

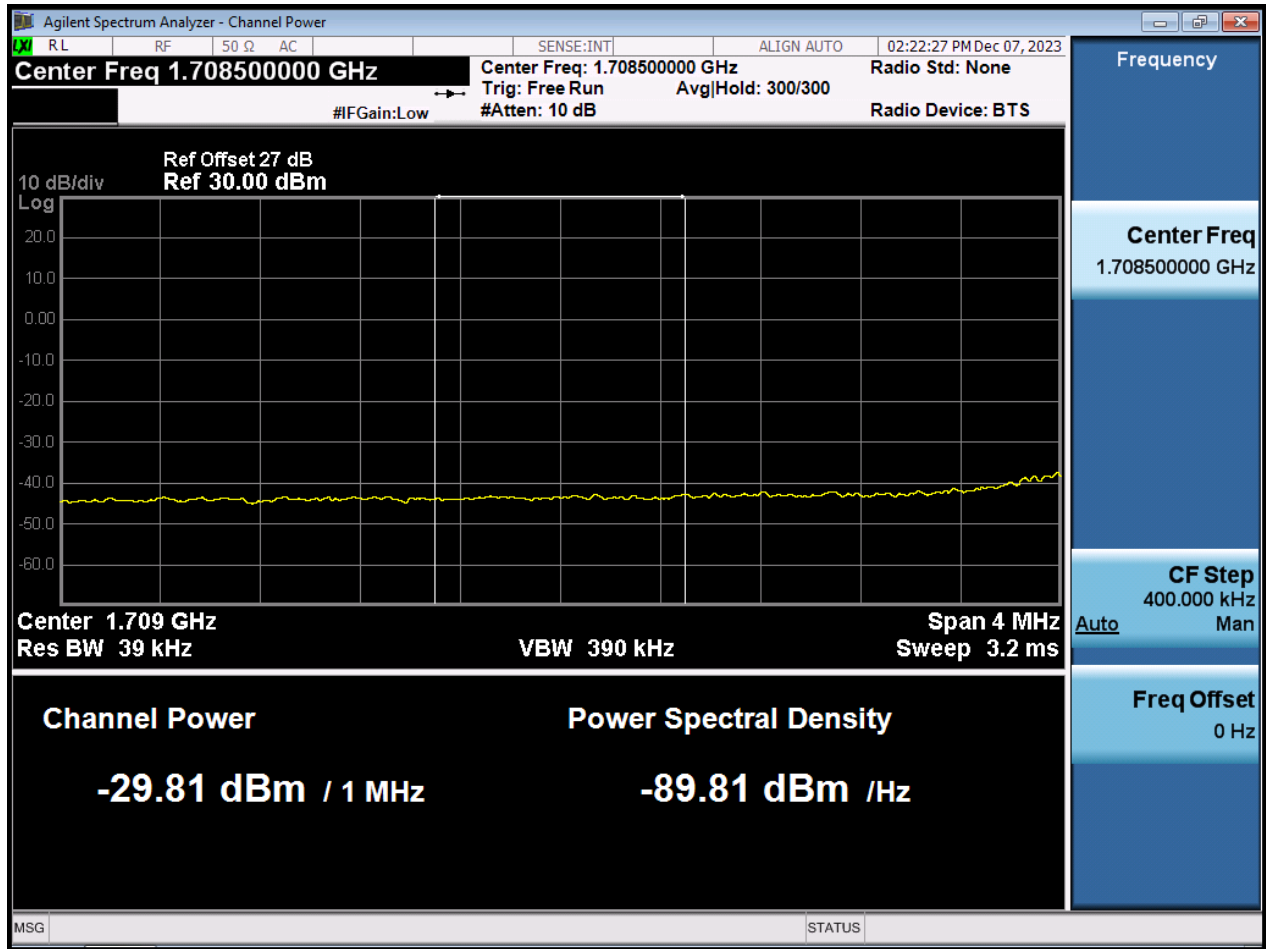

BW20 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(1)



BW20 M\_BandEdge\_Highest Channel\_QPSK\_FullRB(2)

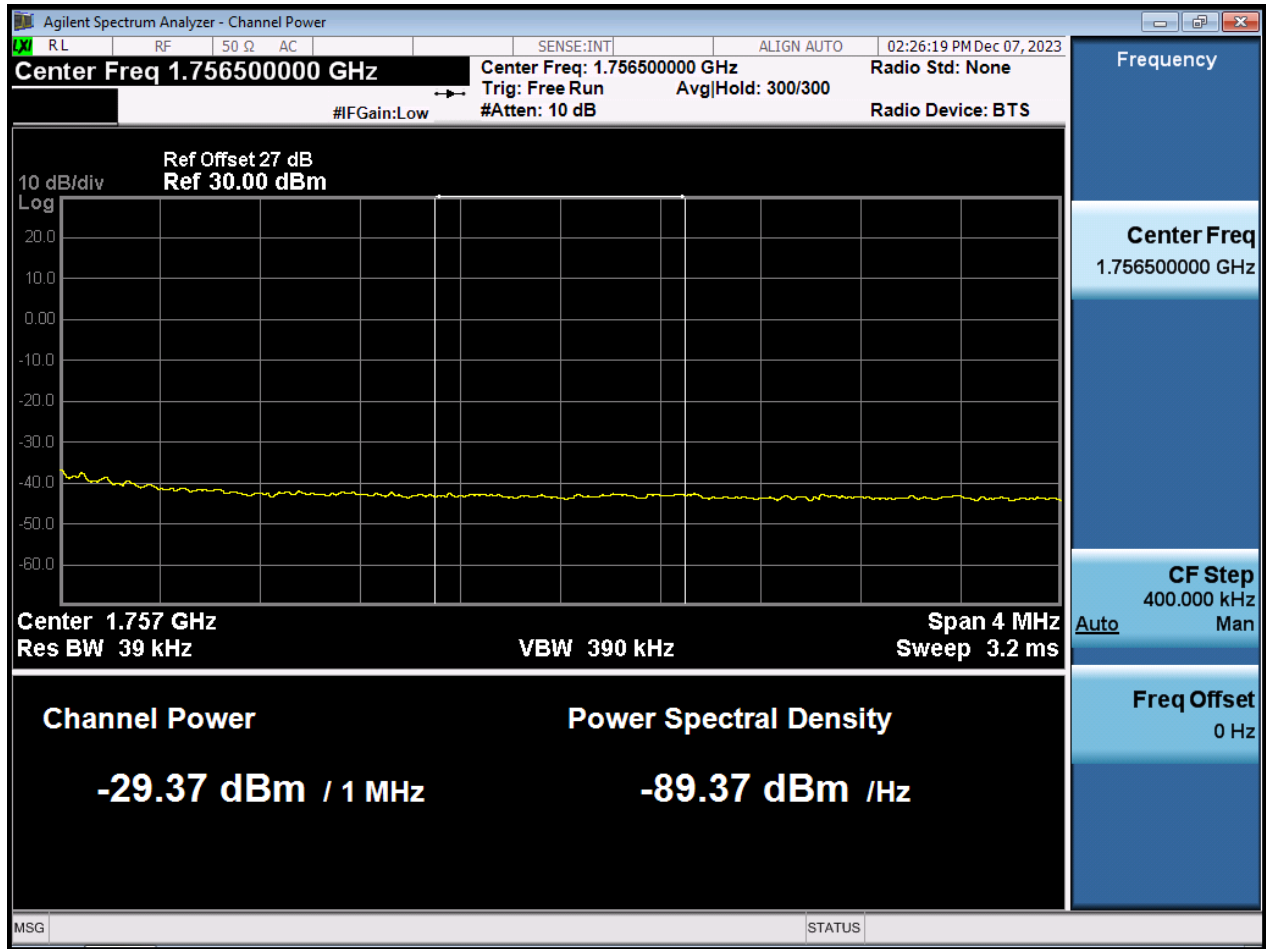




BW20 M\_BandEdge\_Lowest Channel\_QPSK\_1RB




BW20 M\_BandEdge\_Highest Channel\_QPSK\_1RB




BW1.4 M\_OBW\_Middle Channel\_QPSK\_FullRB

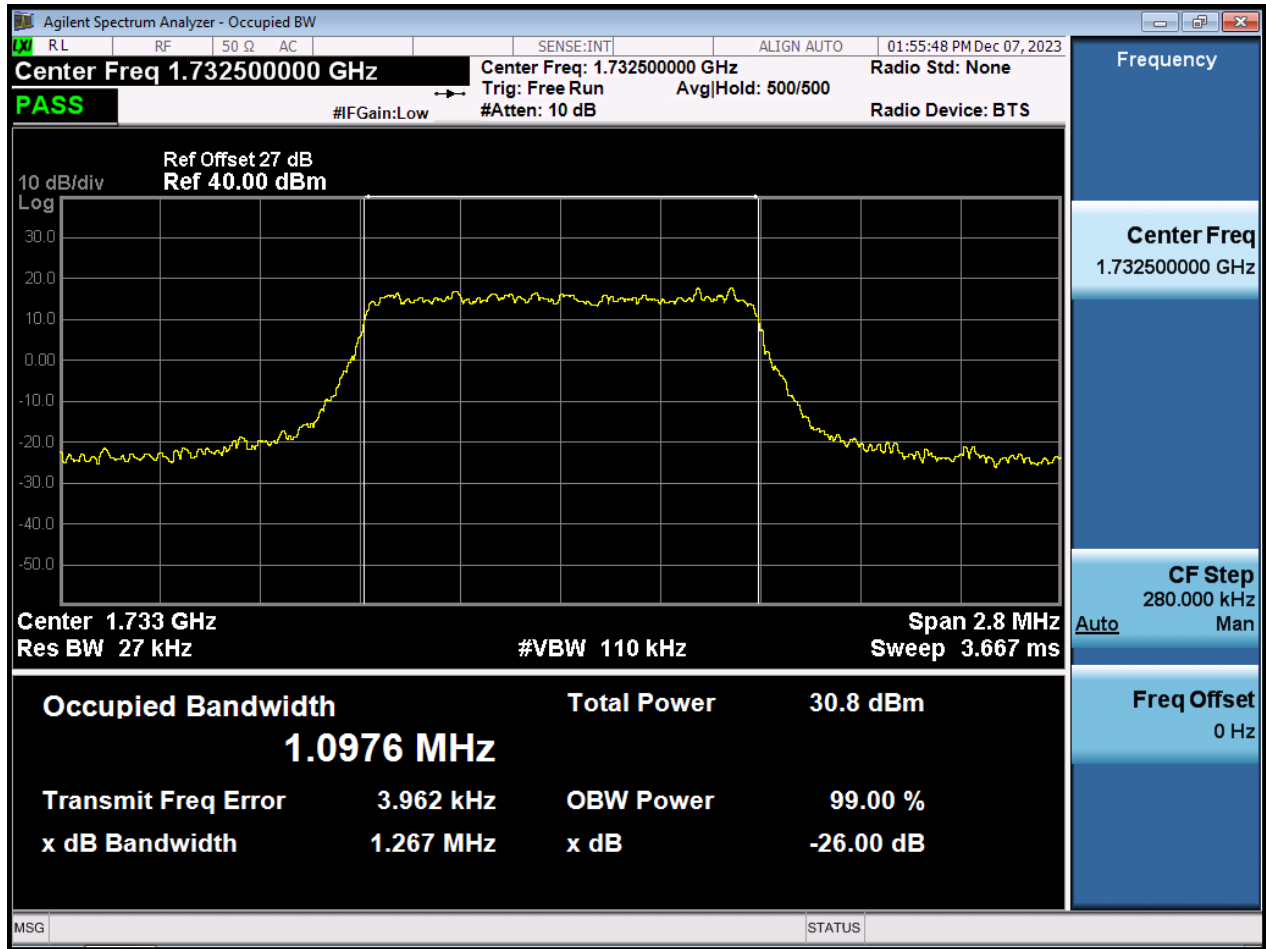


BW1.4 M\_OBW\_Middle Channel\_16QAM\_FullIRB

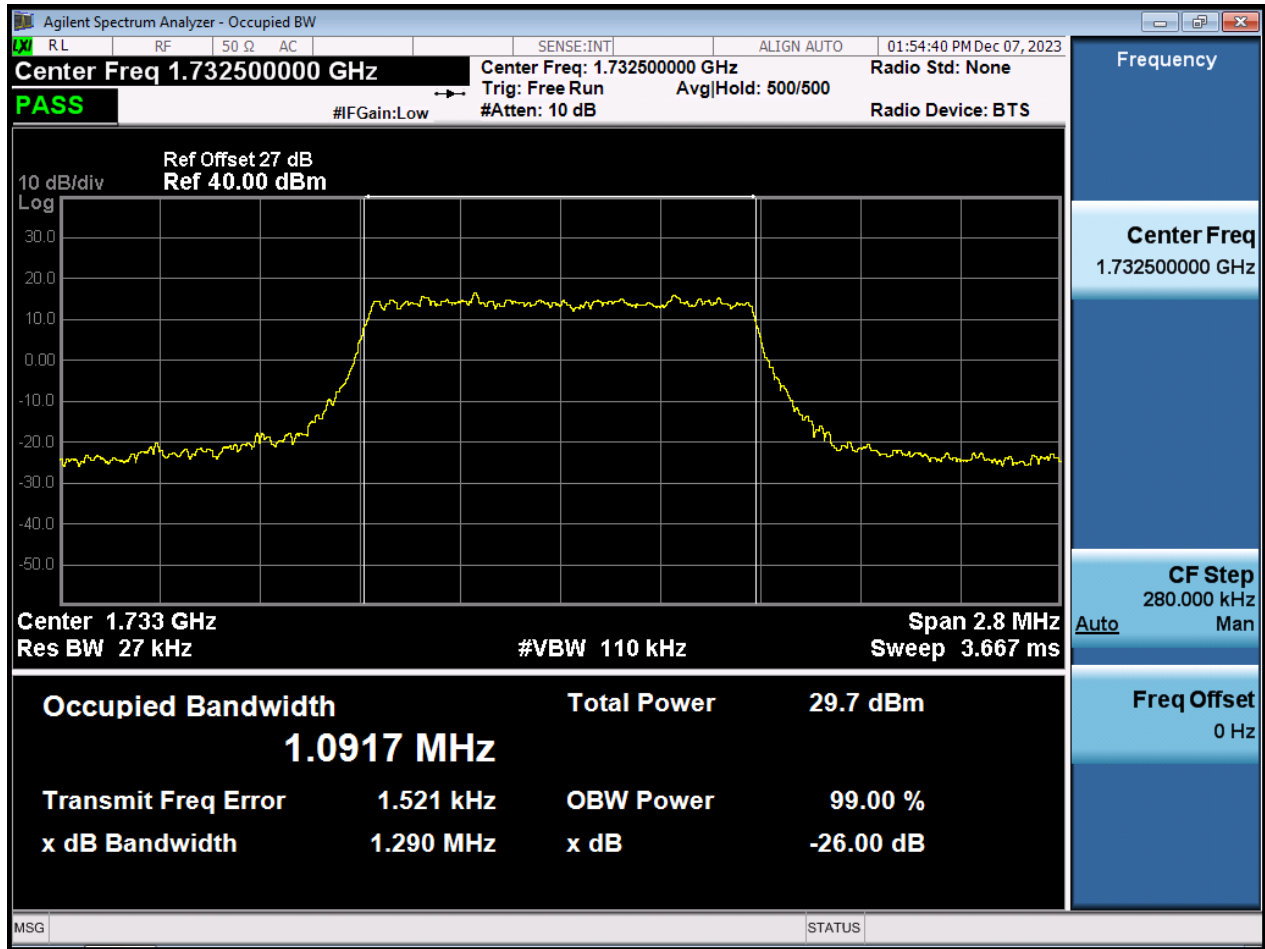


BW1.4 M\_OBW\_Middle Channel\_64QAM\_FullRB

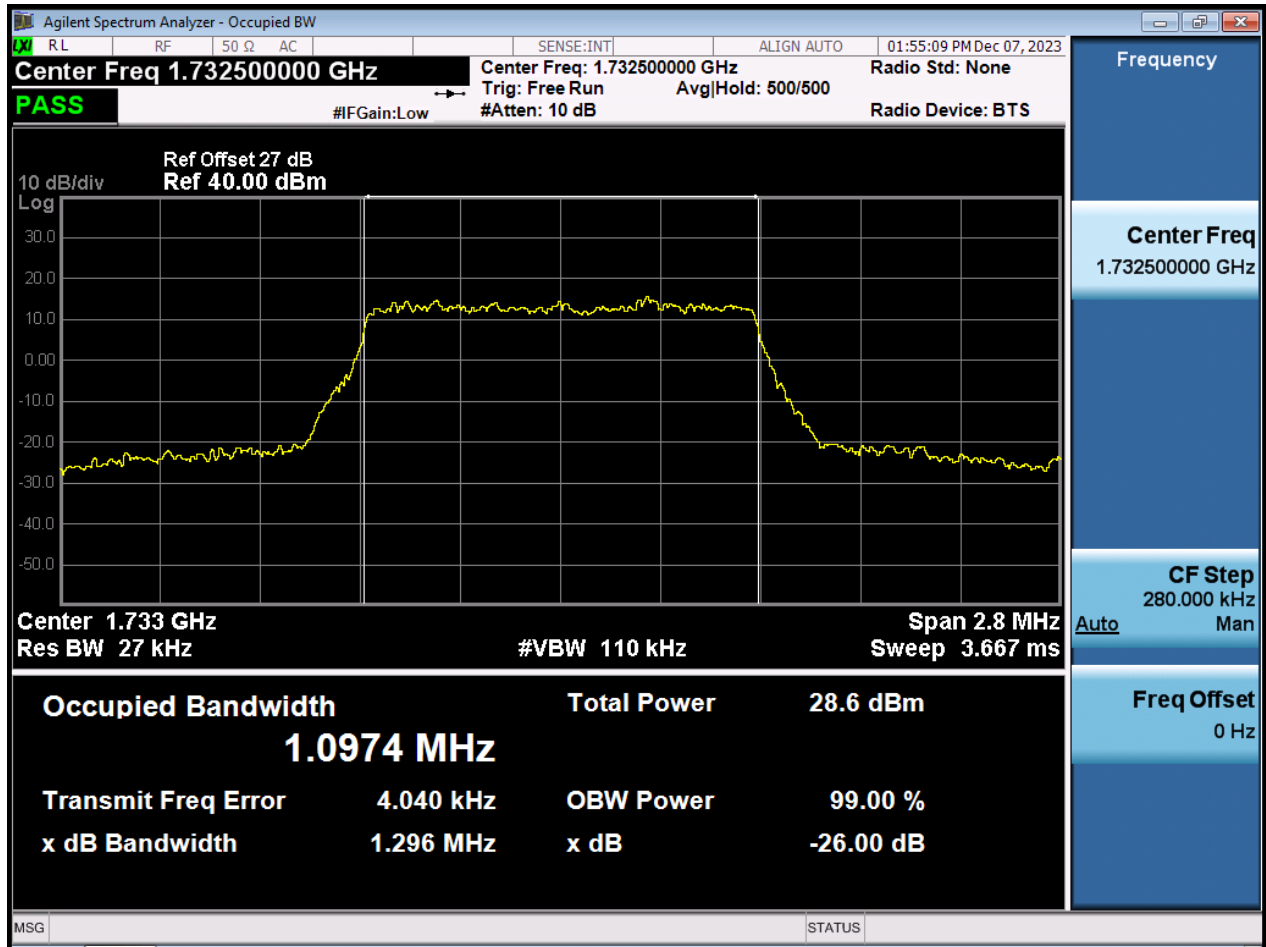


BW1.4 M\_OBW\_Middle Channel\_256QAM\_FullRB

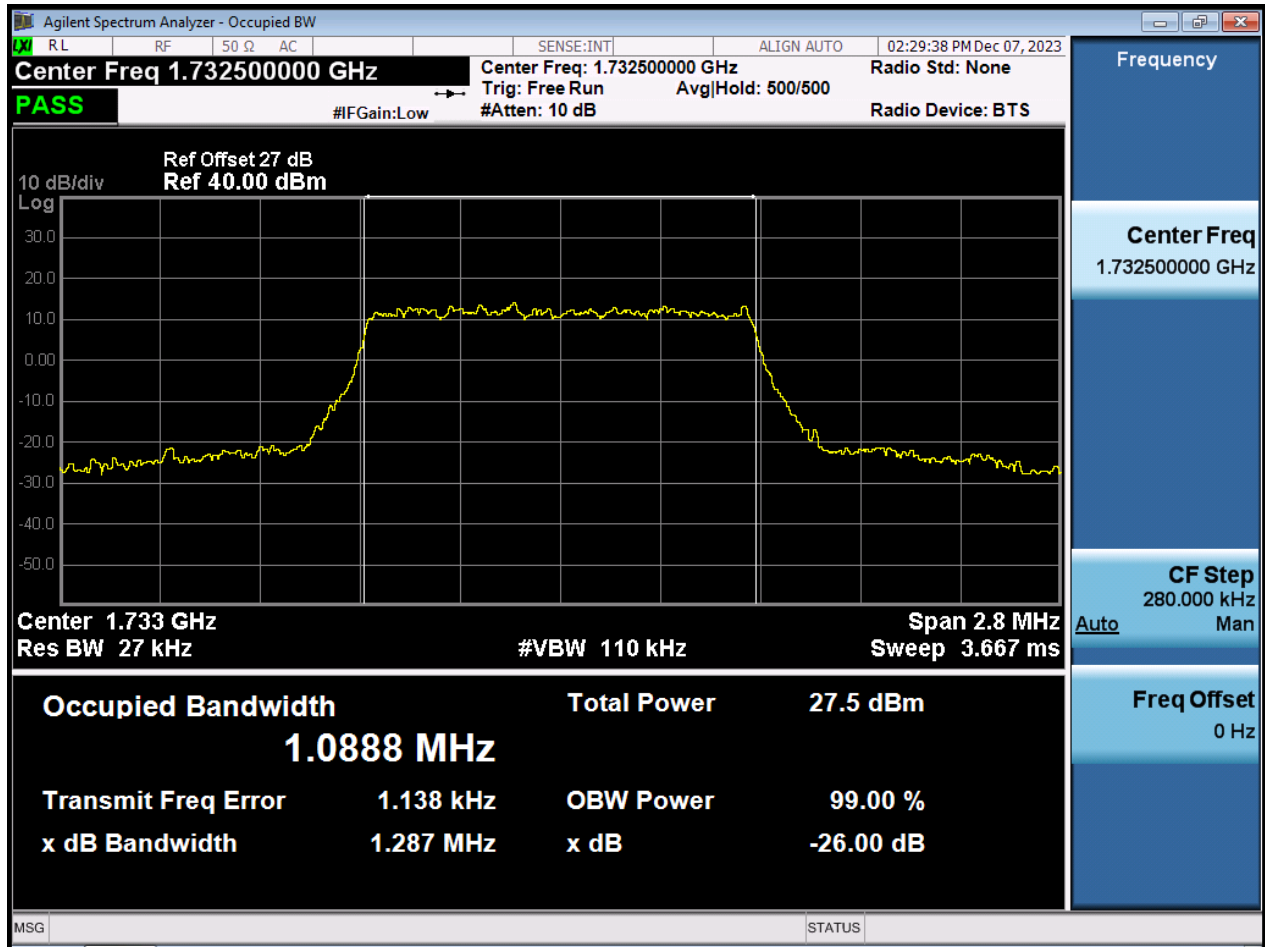

BW3 M\_OBW\_Middle Channel\_QPSK\_FullIRB

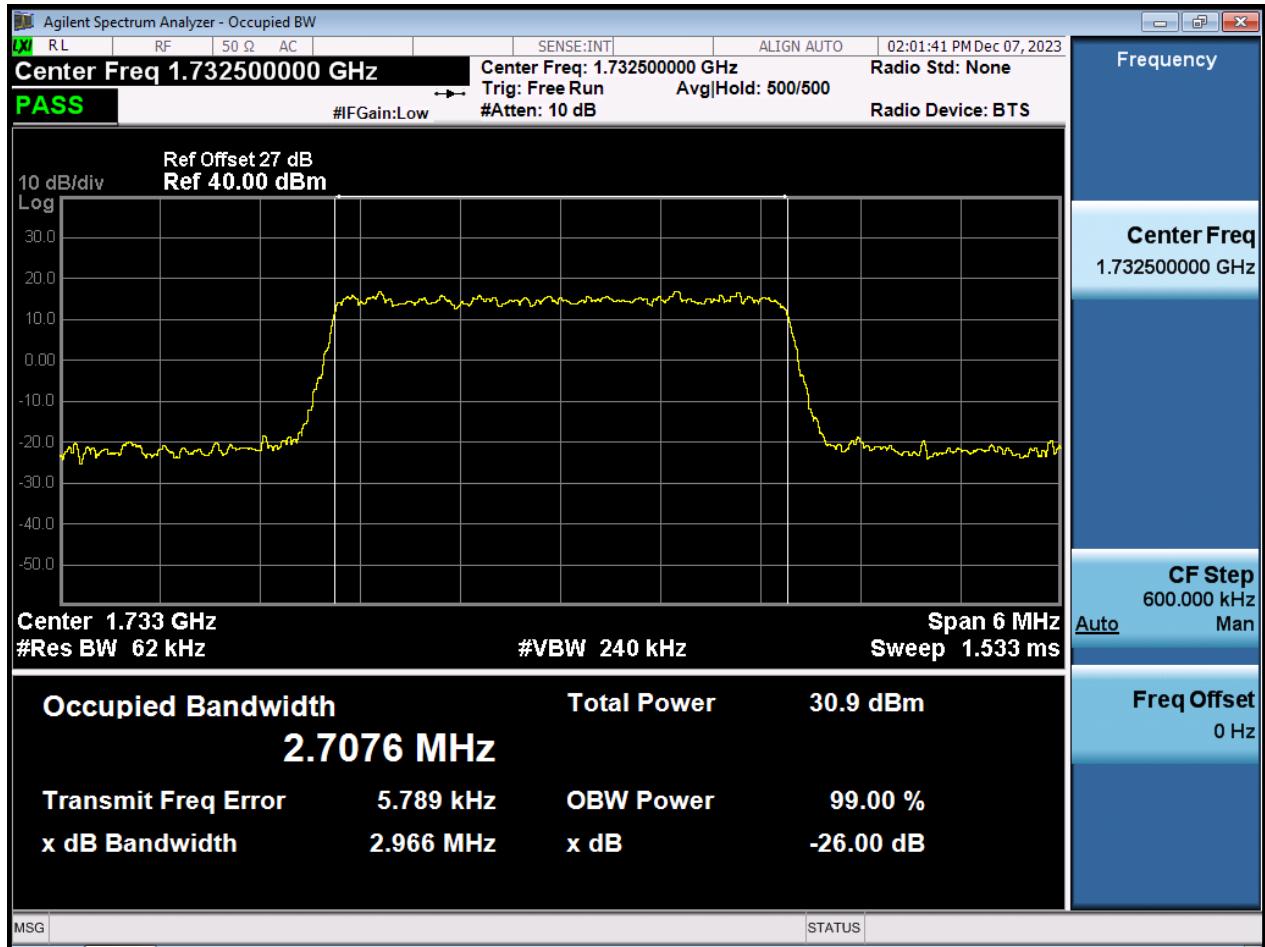


BW3 M\_OBW\_Middle Channel\_16QAM\_FullRB

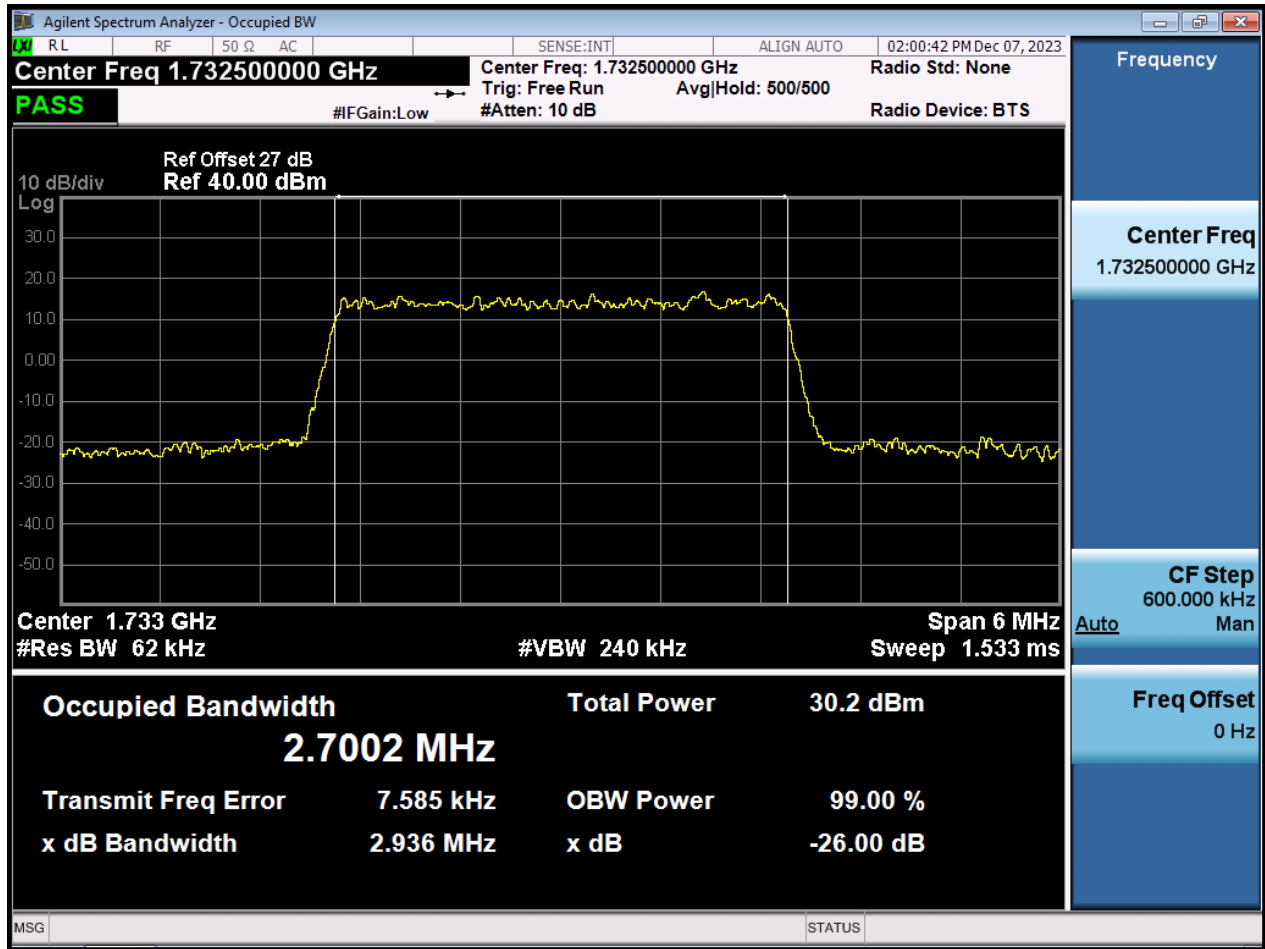





BW3 M\_OBW\_Middle Channel\_64QAM\_FullRB

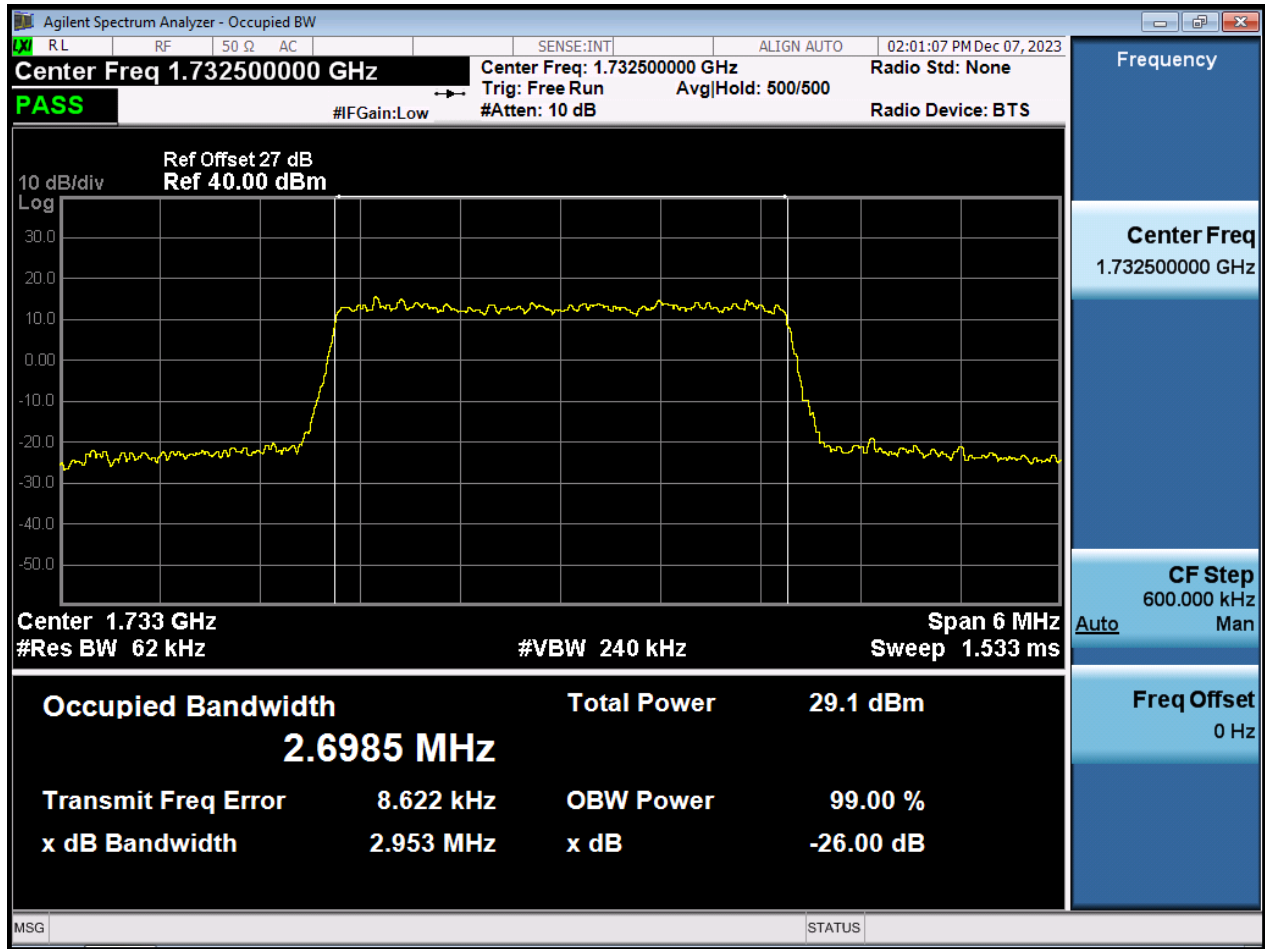


BW3 M\_OBW\_Middle Channel\_256QAM\_FullIRB

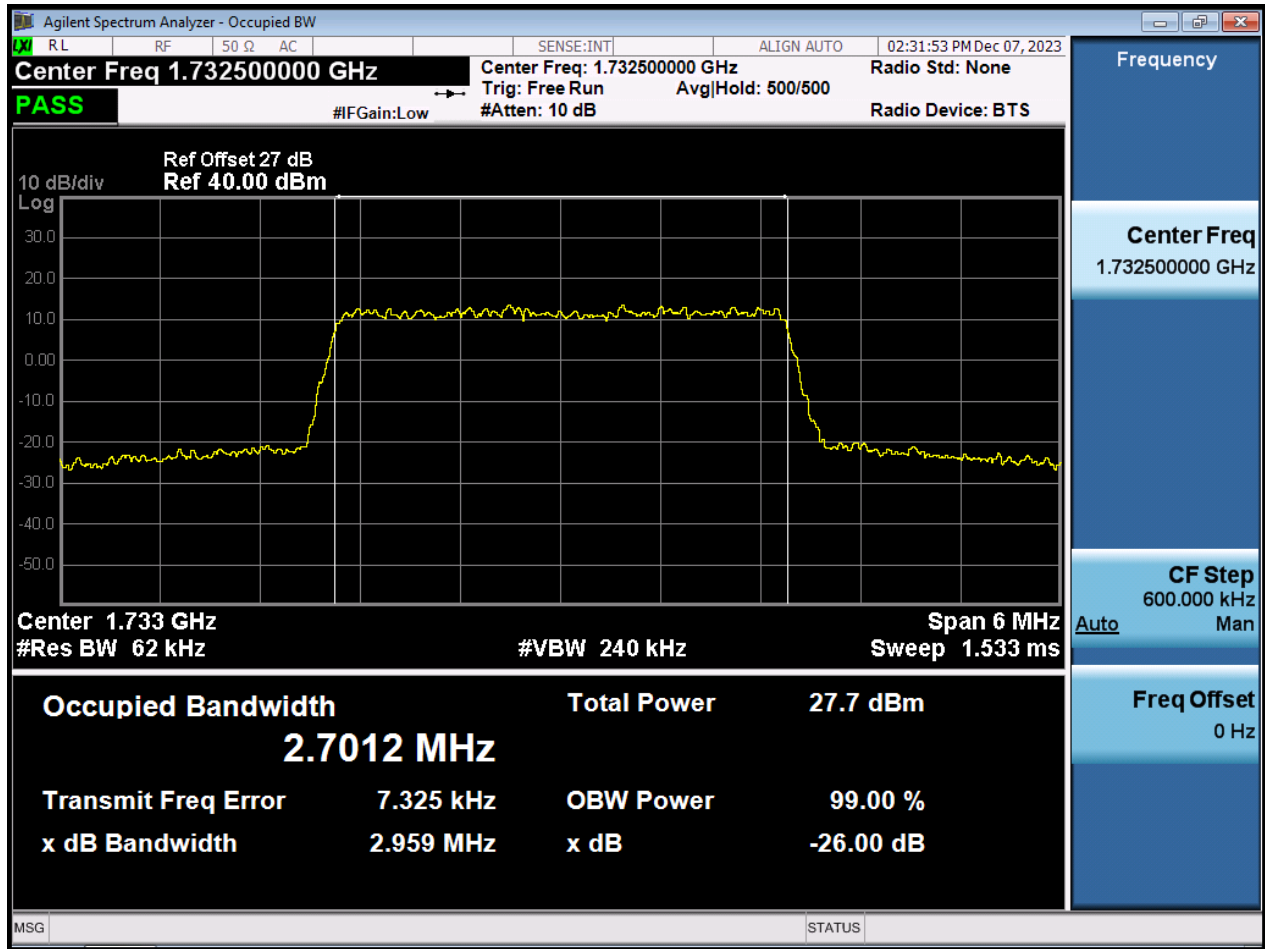


BW5 M\_OBW\_Middle Channel\_QPSK\_FullIRB

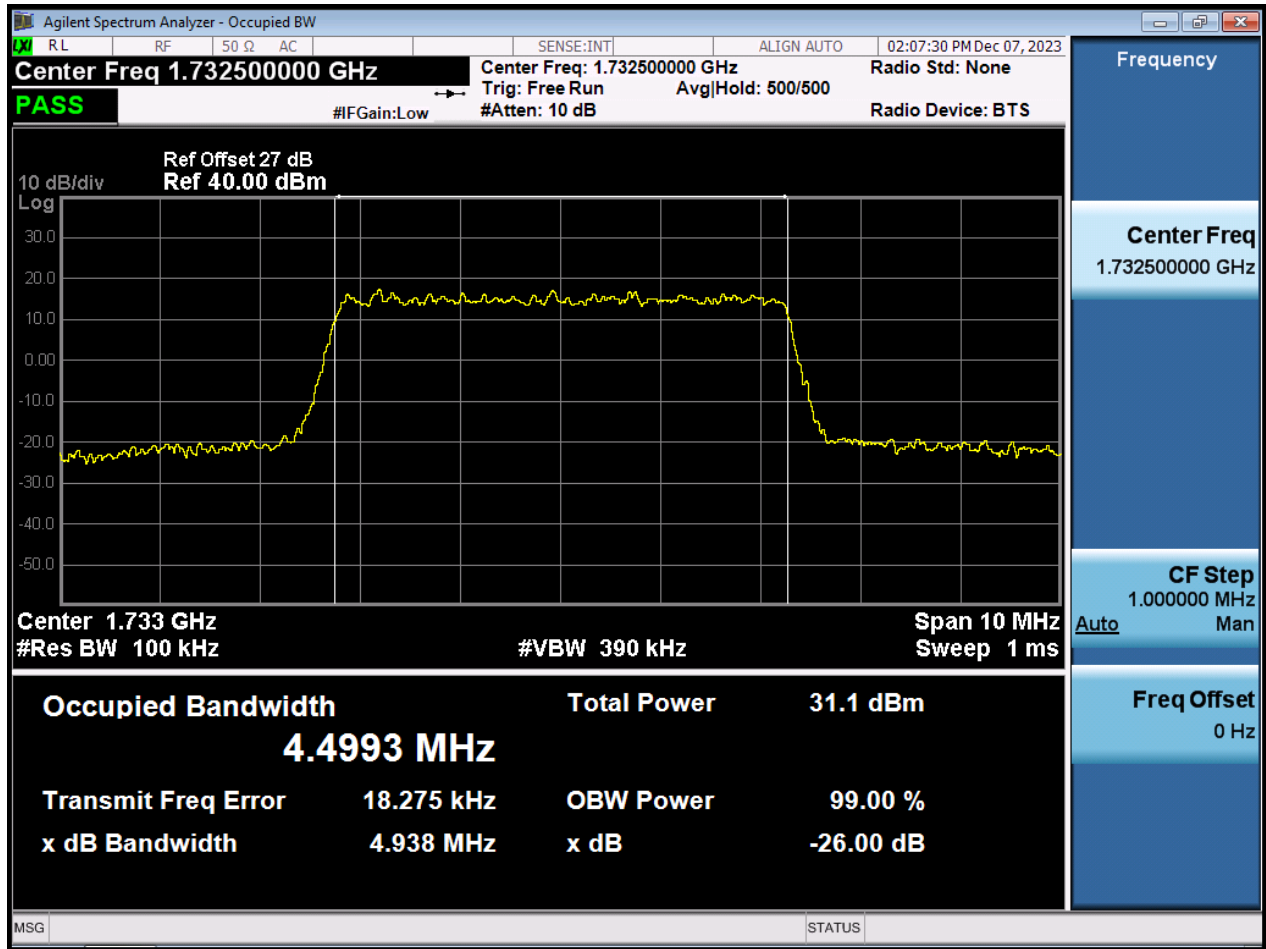


BW5 M\_OBW\_Middle Channel\_16QAM\_FullRB

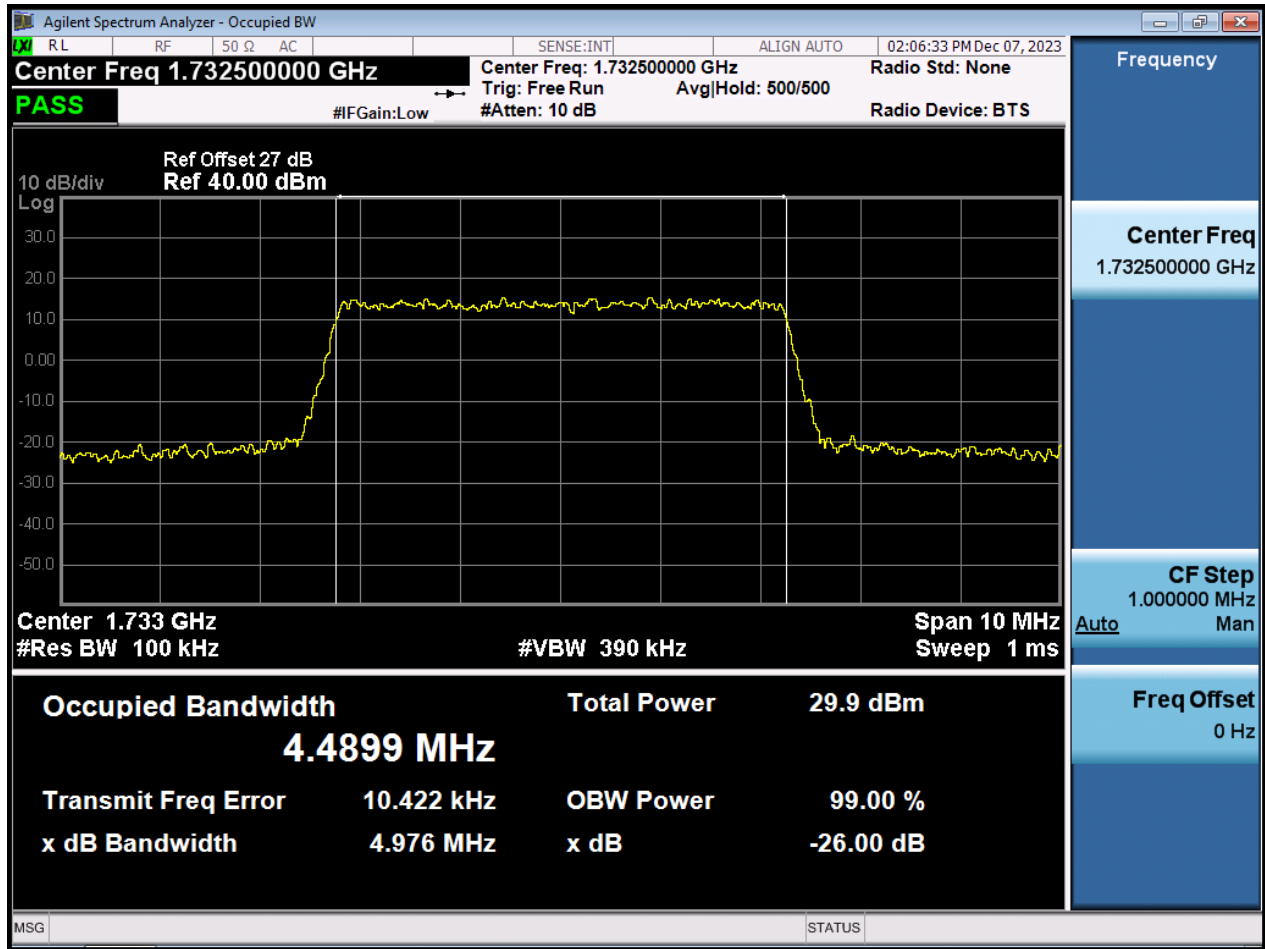


BW5 M\_OBW\_Middle Channel\_64QAM\_FullRB

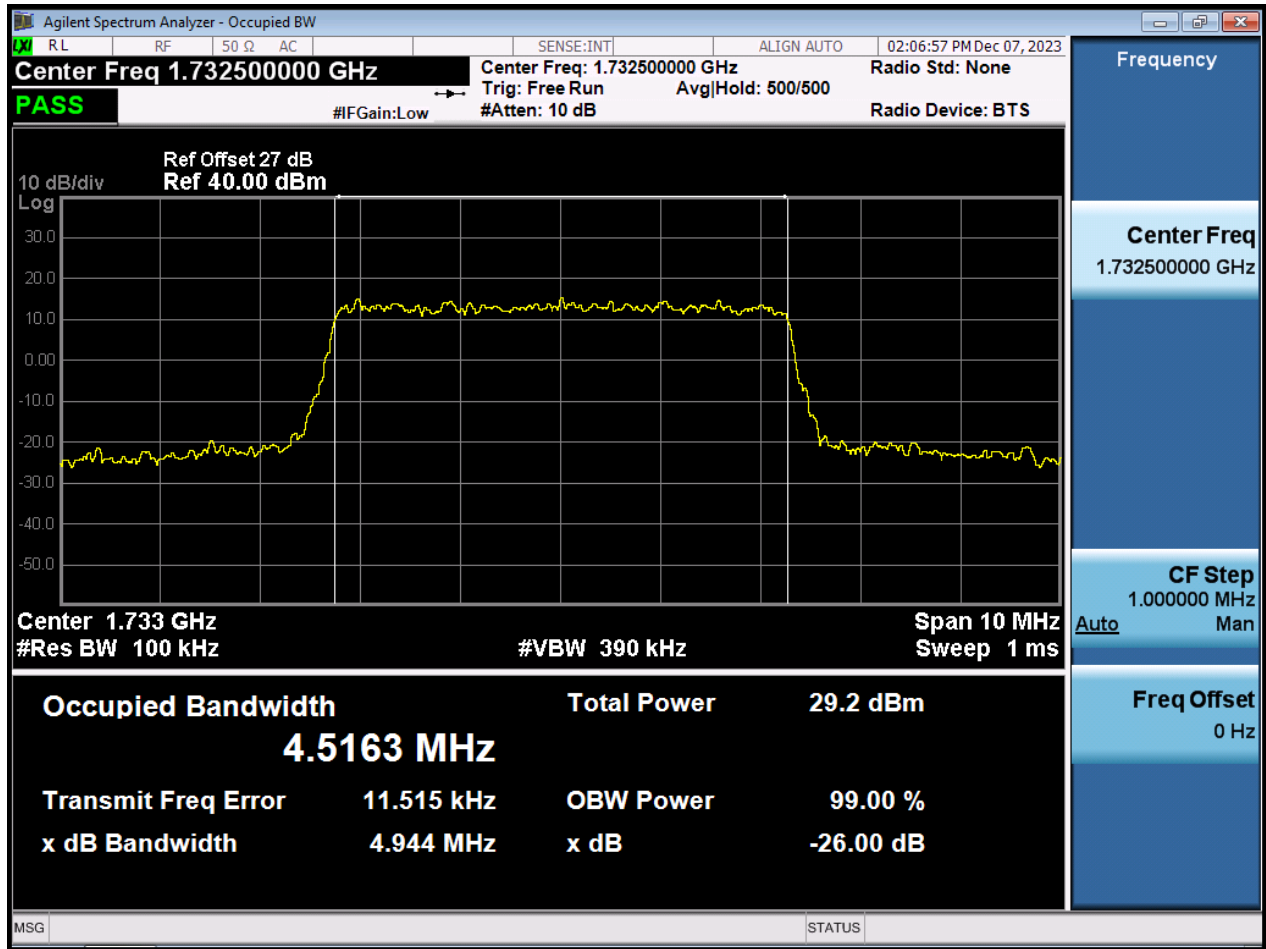


BW5 M\_OBW\_Middle Channel\_256QAM\_FullIRB

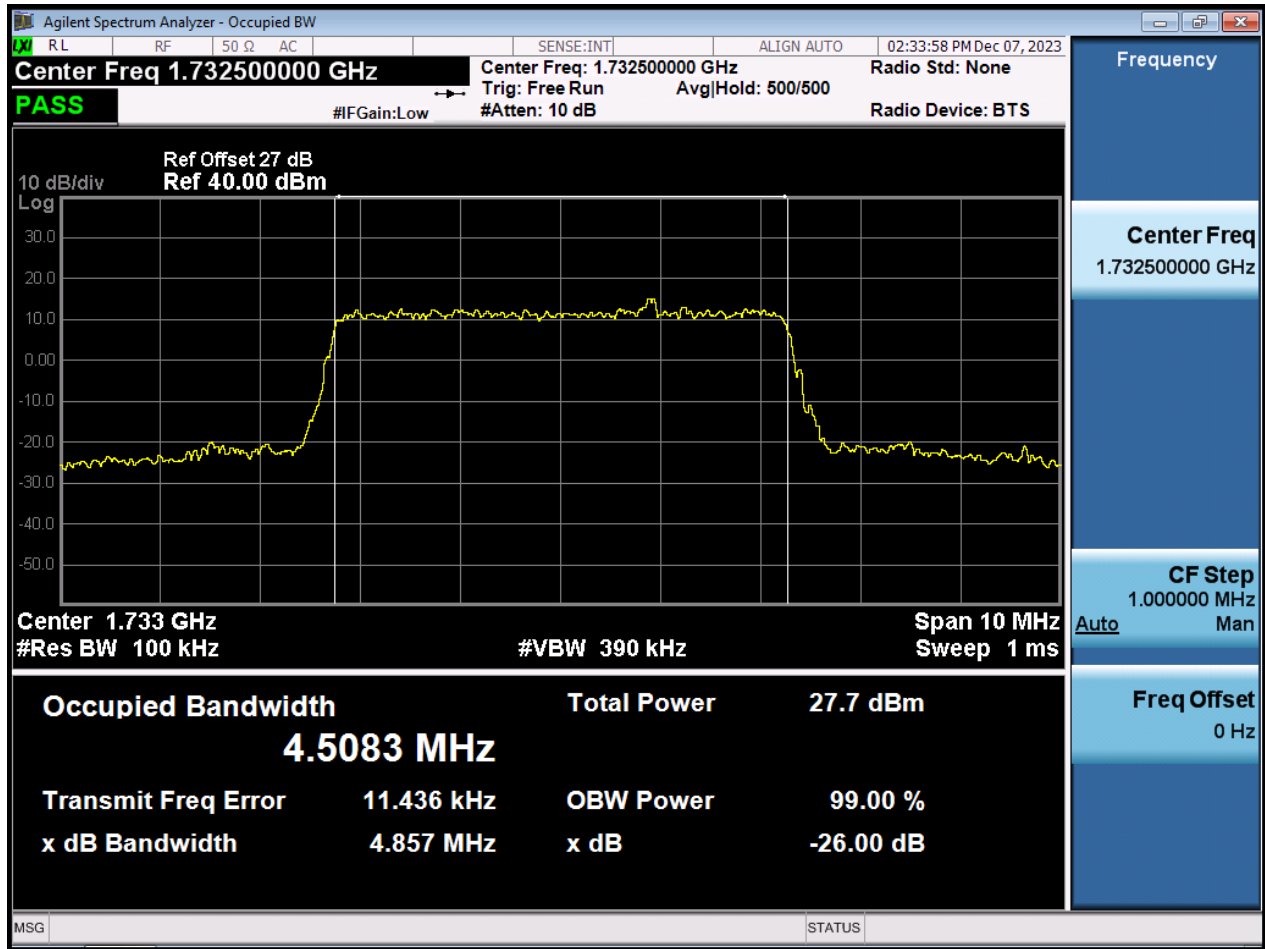

BW10 M\_OBW\_Middle Channel\_QPSK\_FullRB

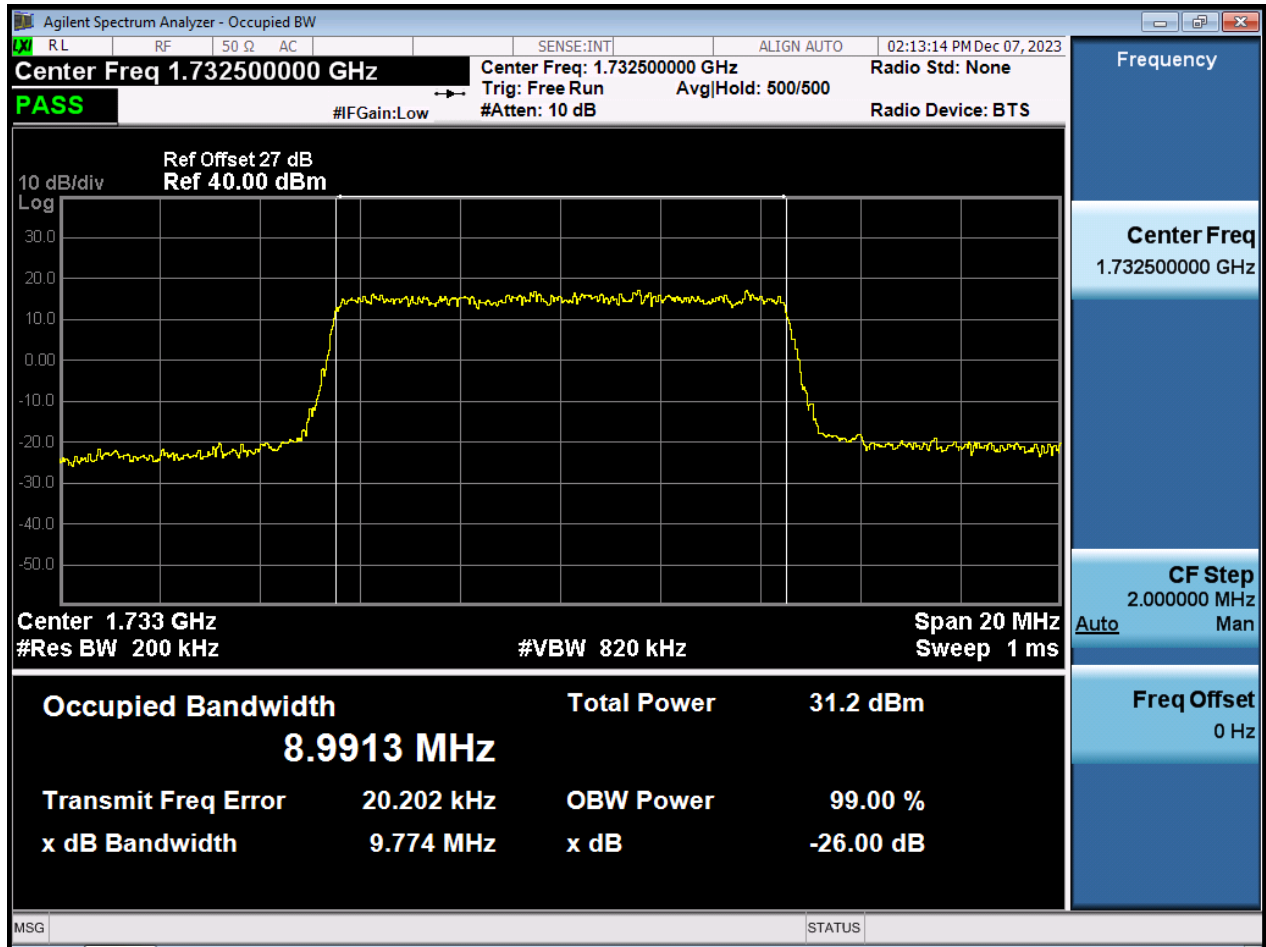


BW10 M\_OBW\_Middle Channel\_16QAM\_FullIRB

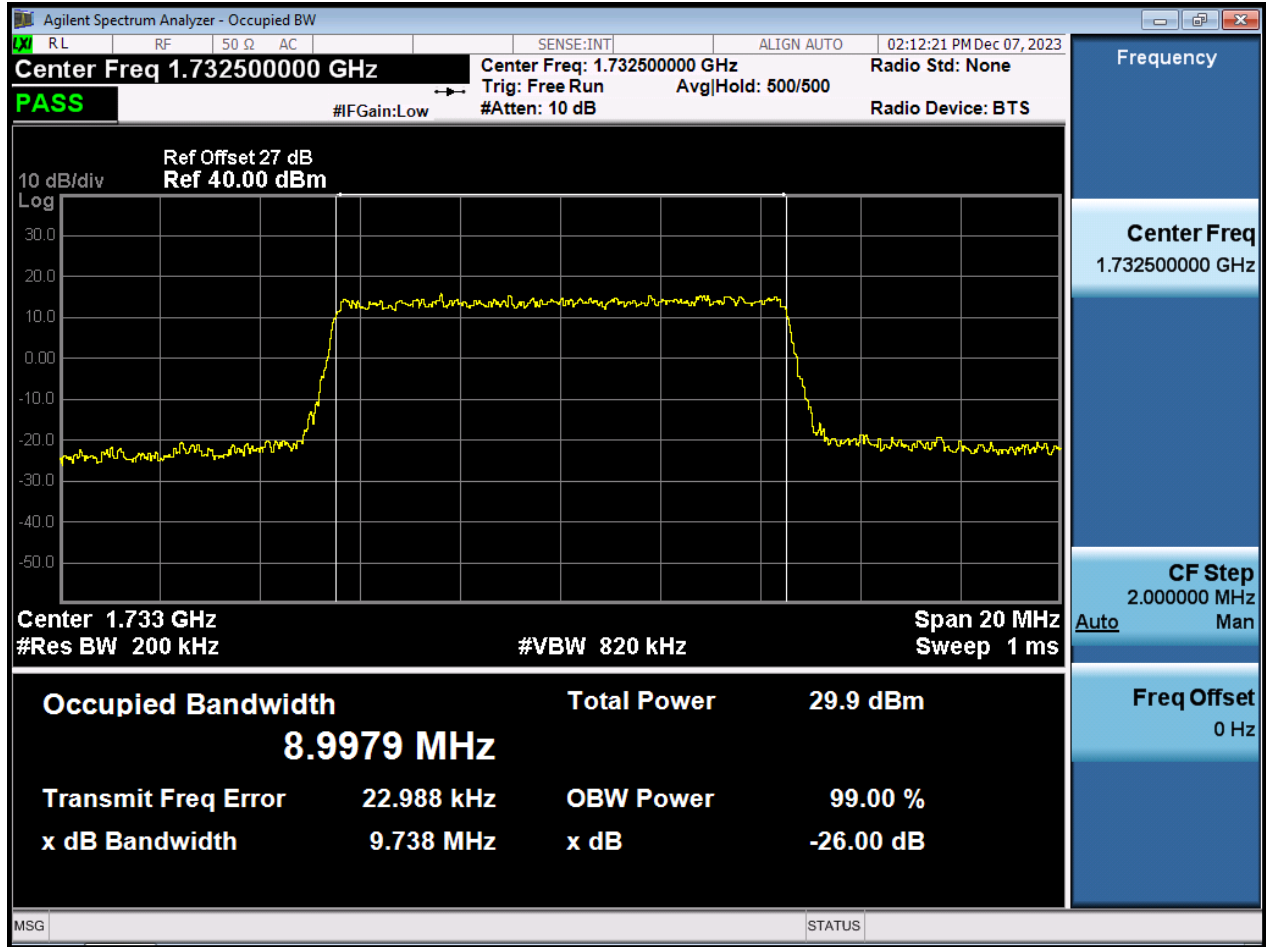





BW10 M\_OBW\_Middle Channel\_64QAM\_FullIRB

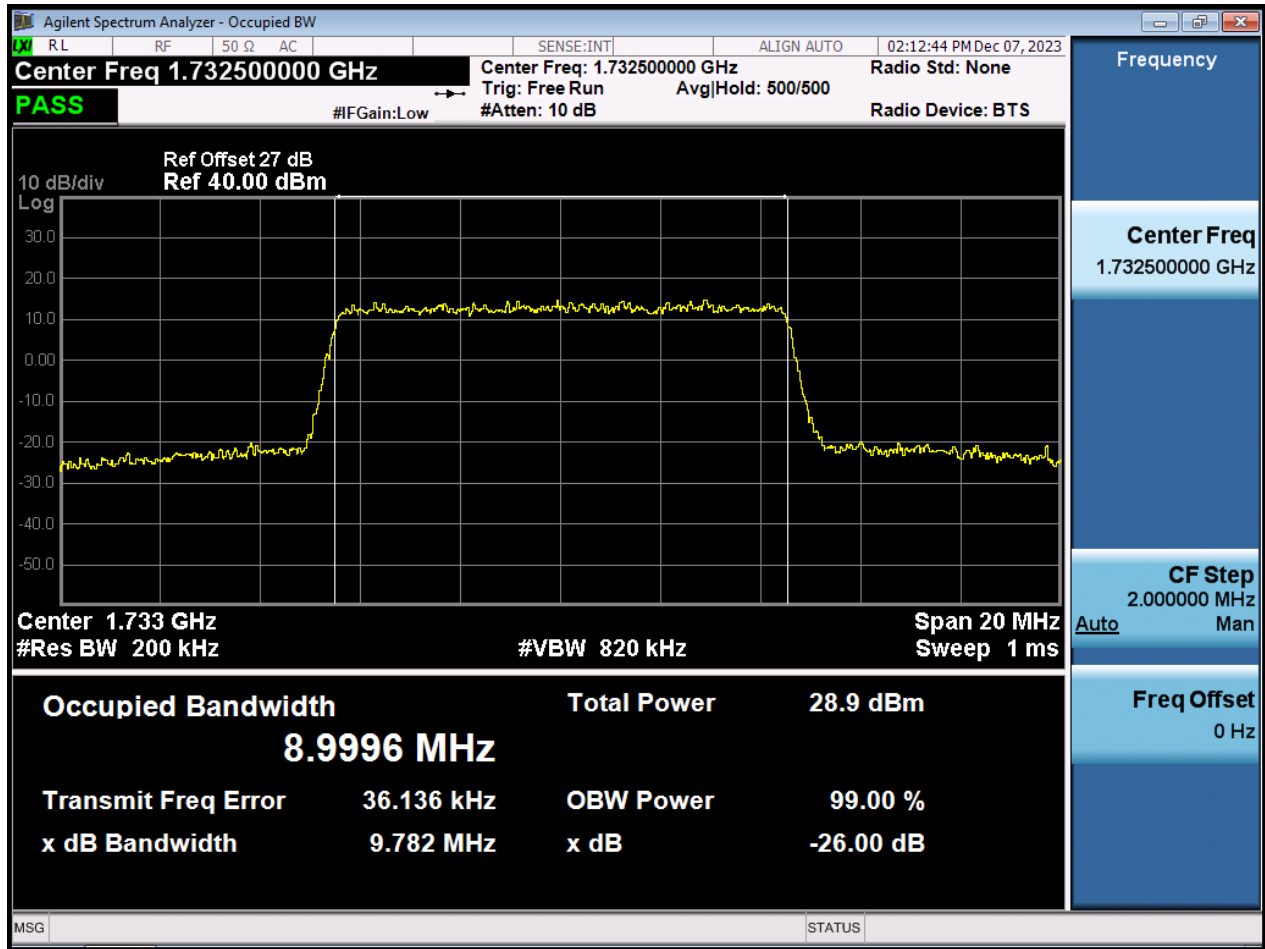


BW10 M\_OBW\_Middle Channel\_256QAM\_FullIRB

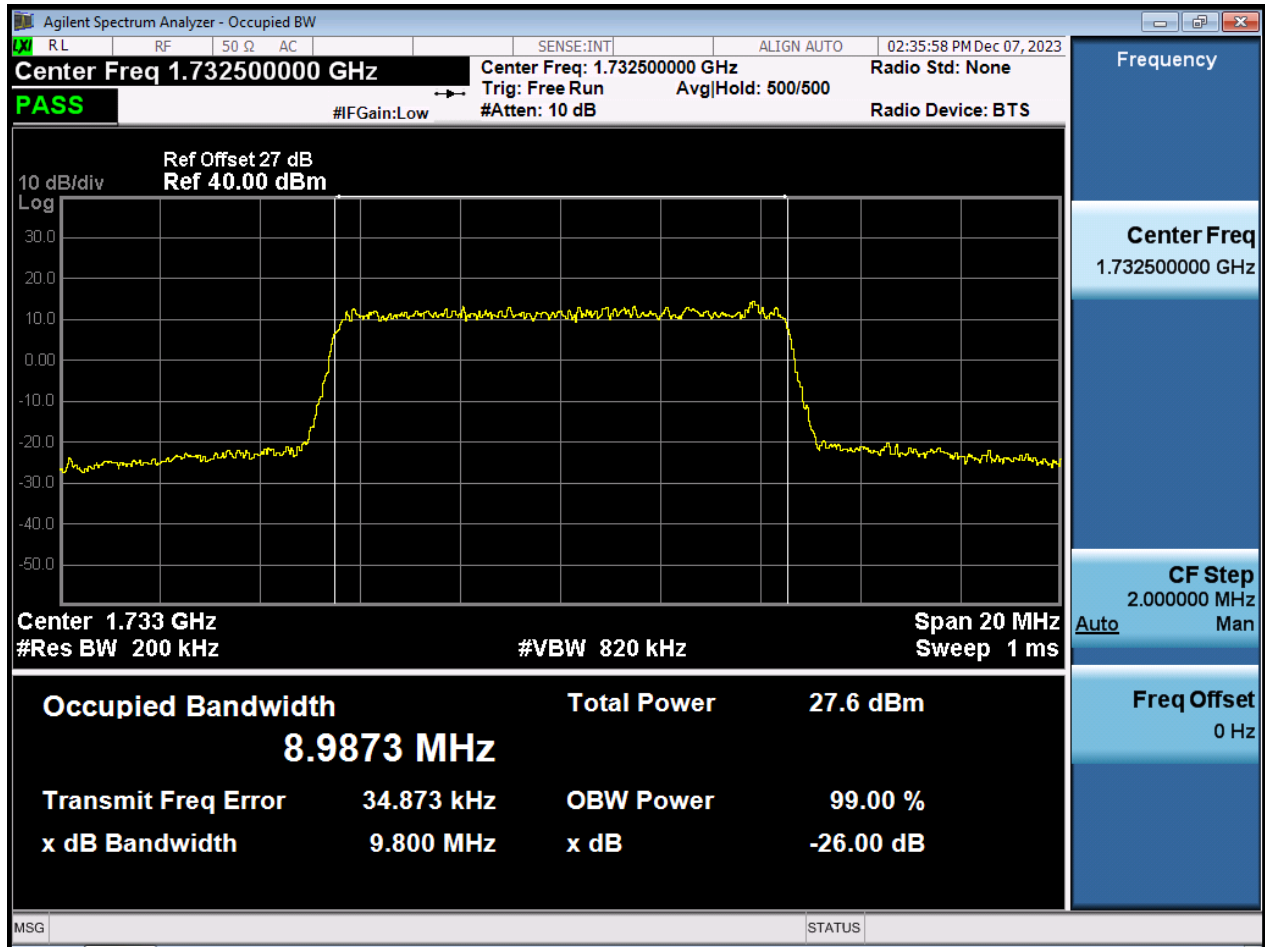


BW15 M\_OBW\_Middle Channel\_QPSK\_FullRB

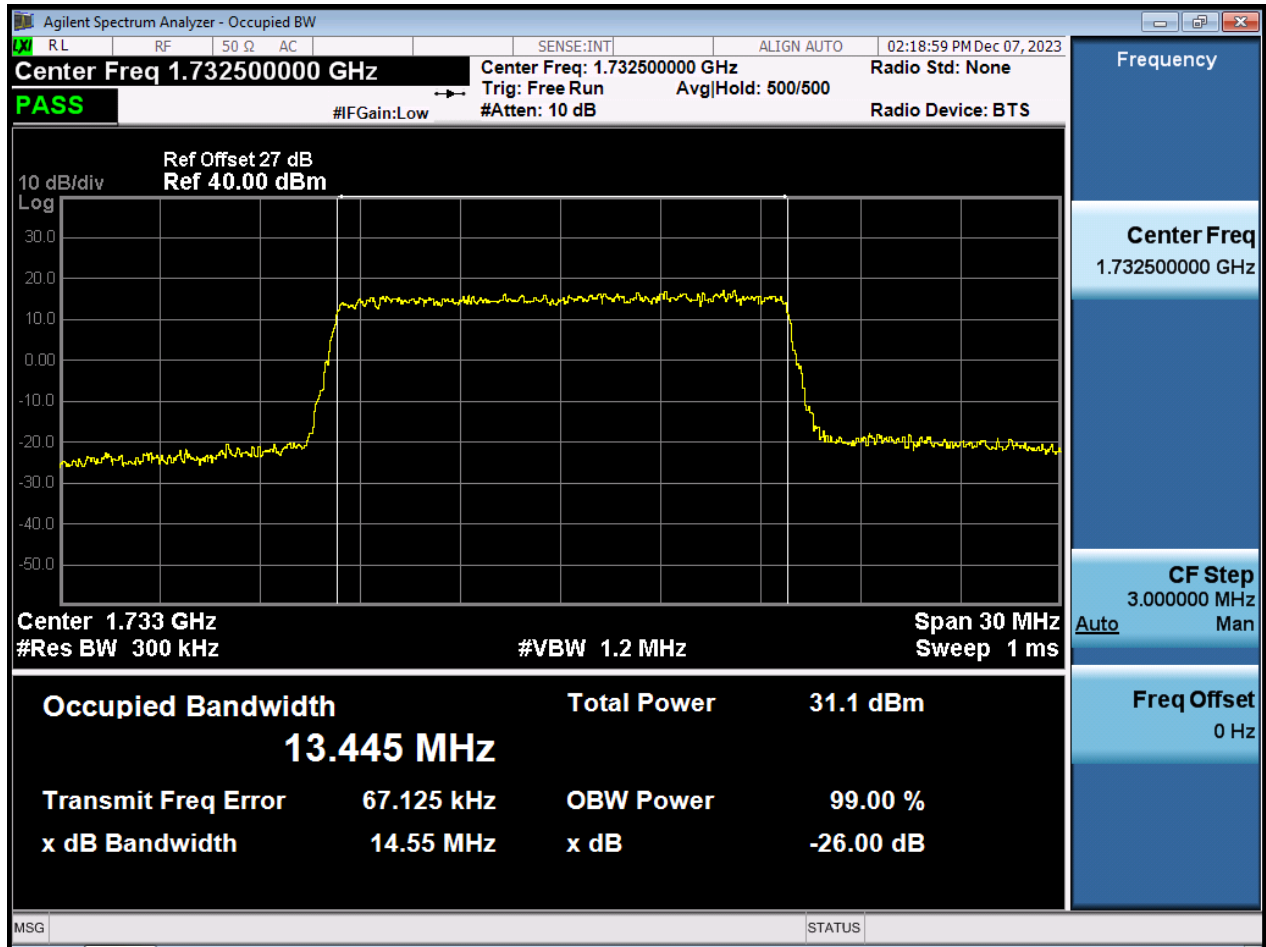


BW15 M\_OBW\_Middle Channel\_16QAM\_FullIRB

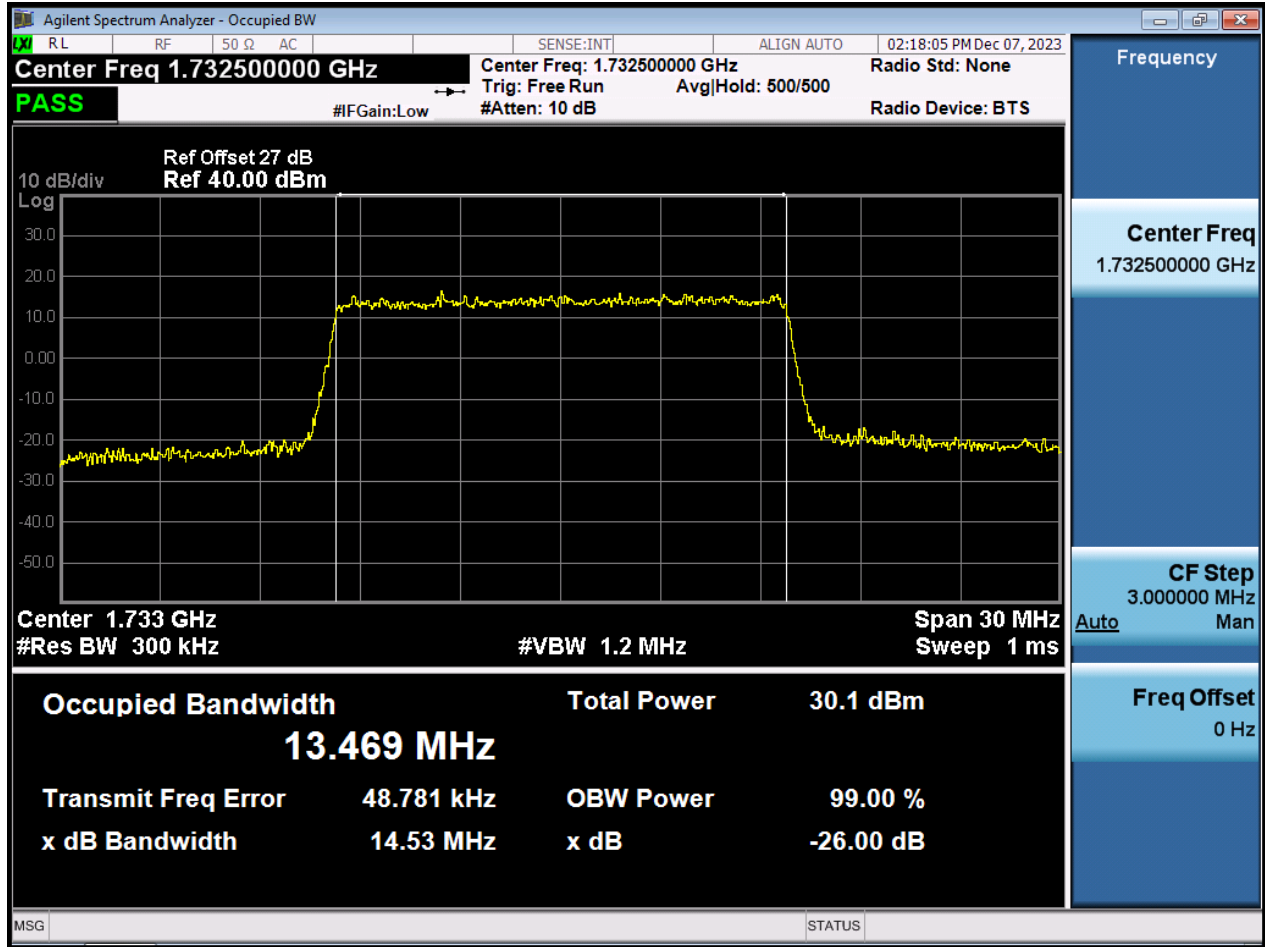


BW15 M\_OBW\_Middle Channel\_64QAM\_FullIRB

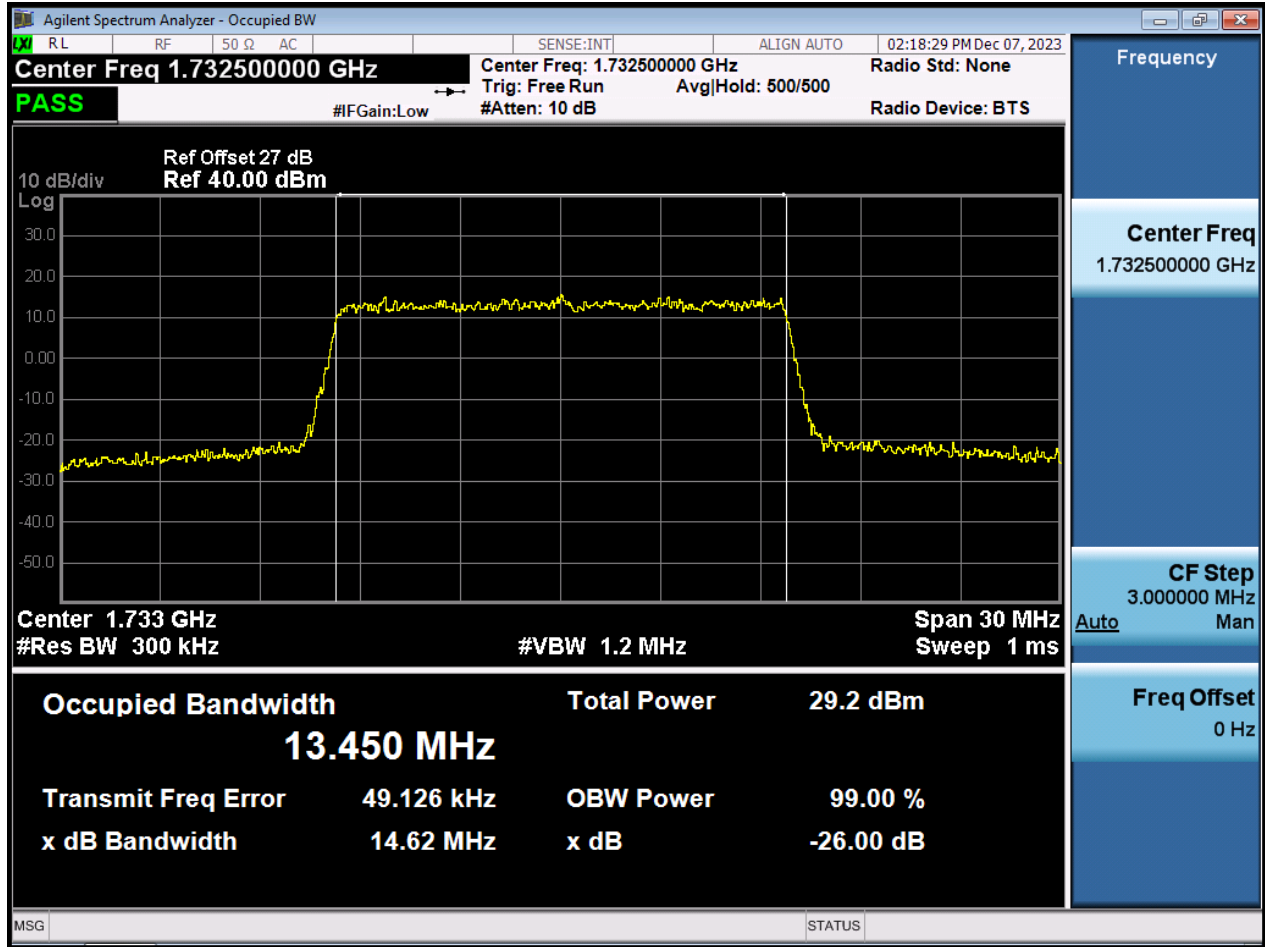


BW15 M\_OBW\_Middle Channel\_256QAM\_FullIRB

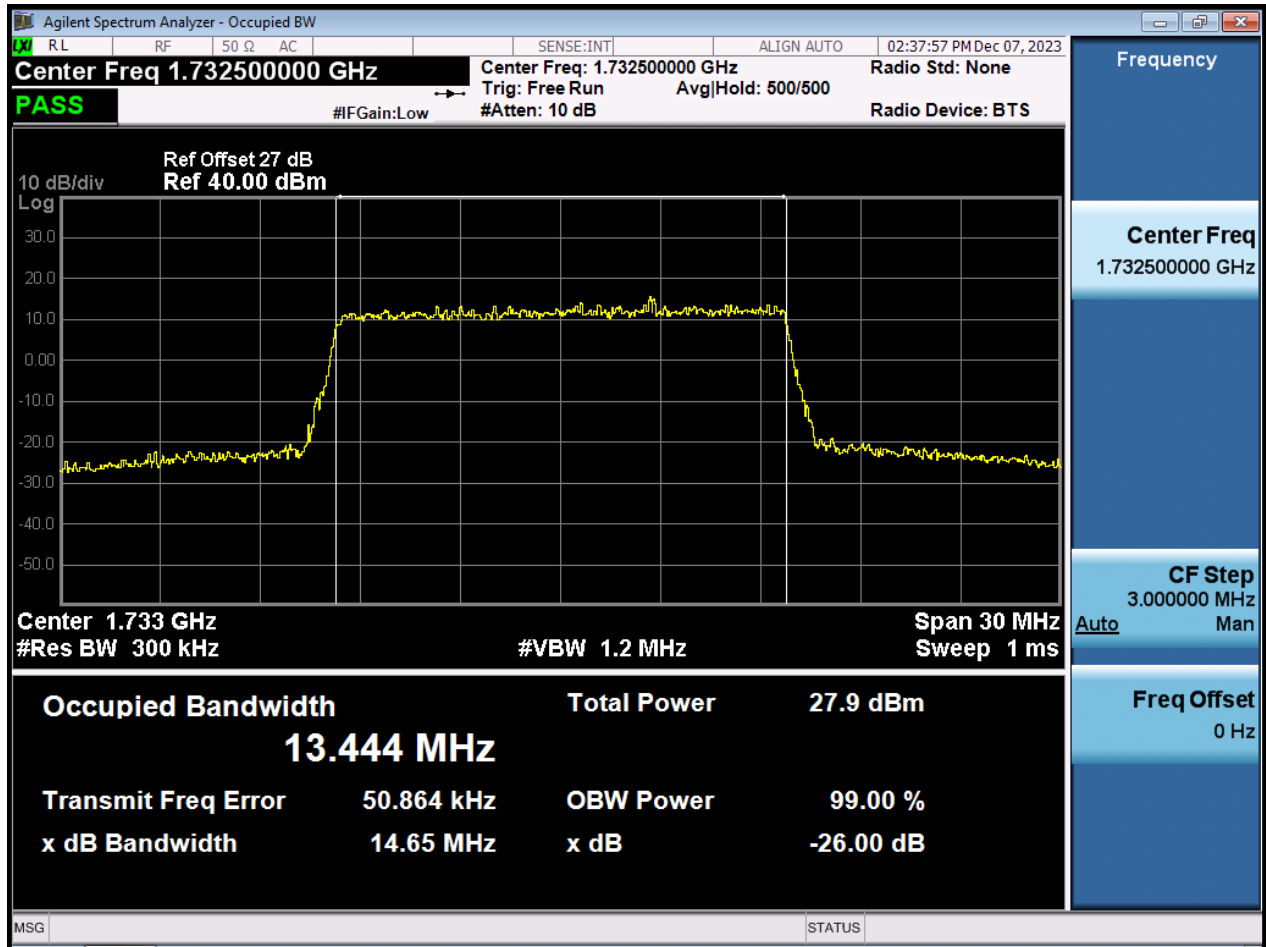

BW20 M\_OBW\_Middle Channel\_QPSK\_FullRB

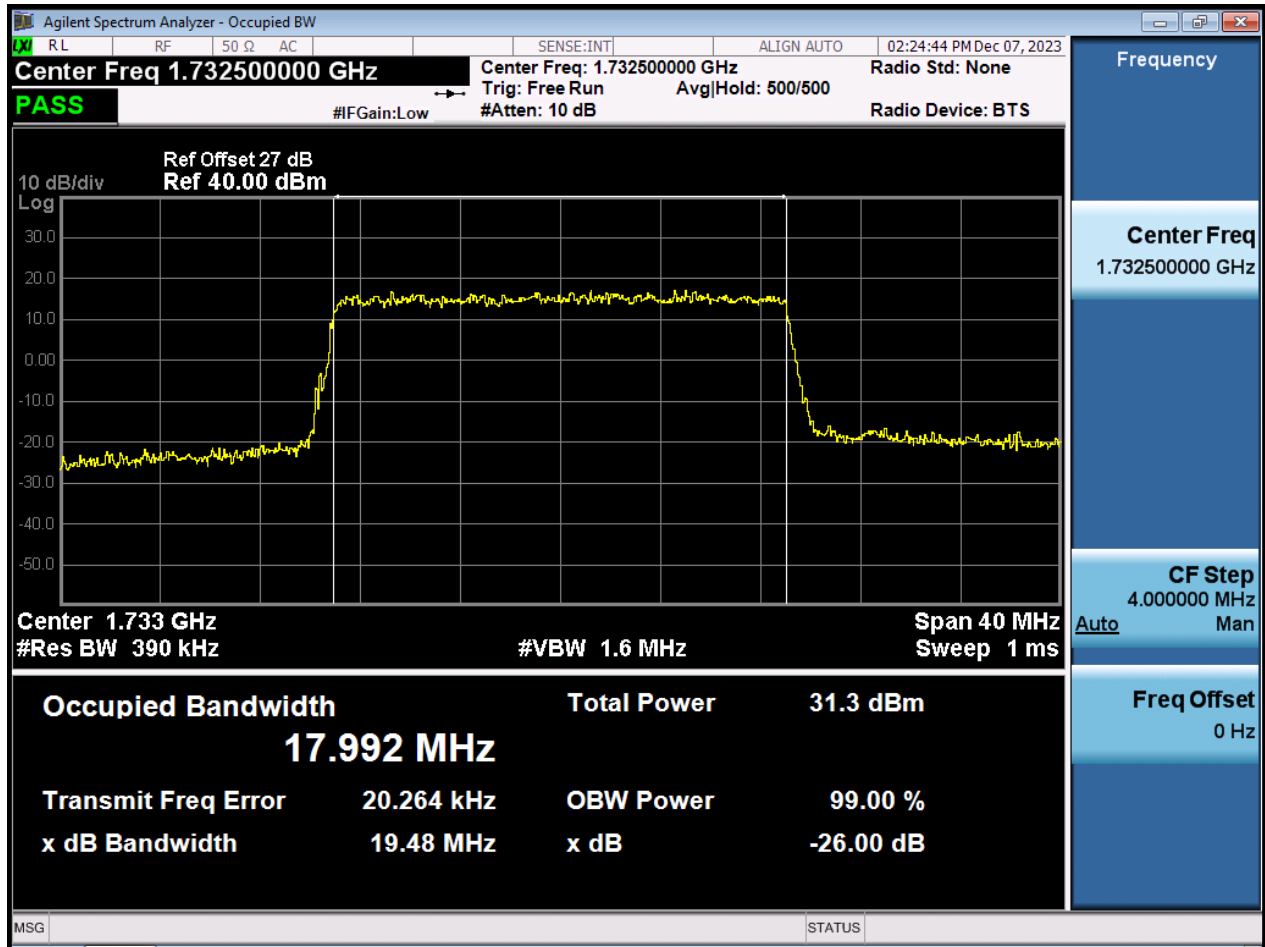


BW20 M\_OBW\_Middle Channel\_16QAM\_FullIRB

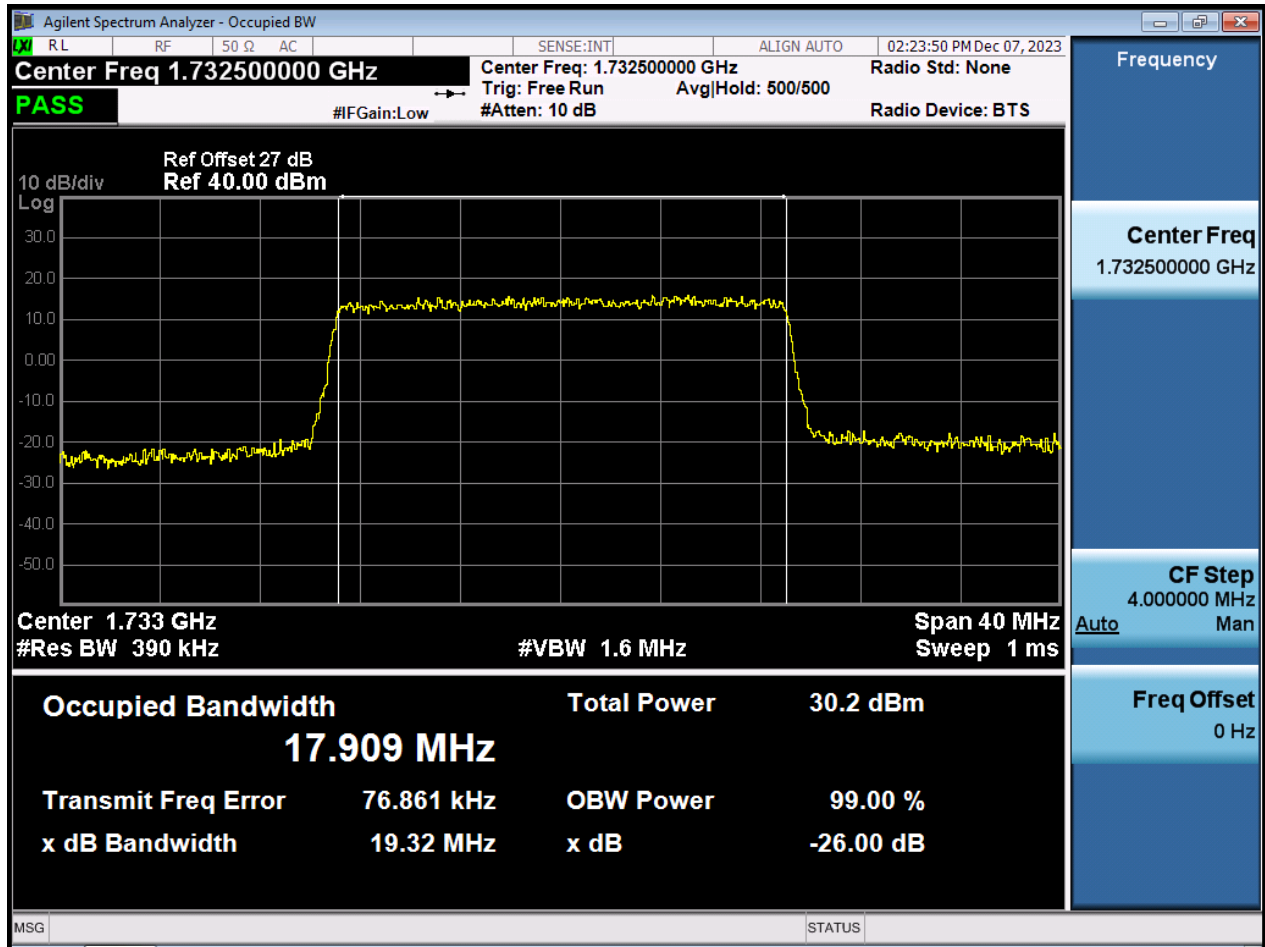





BW20 M\_OBW\_Middle Channel\_64QAM\_FullIRB

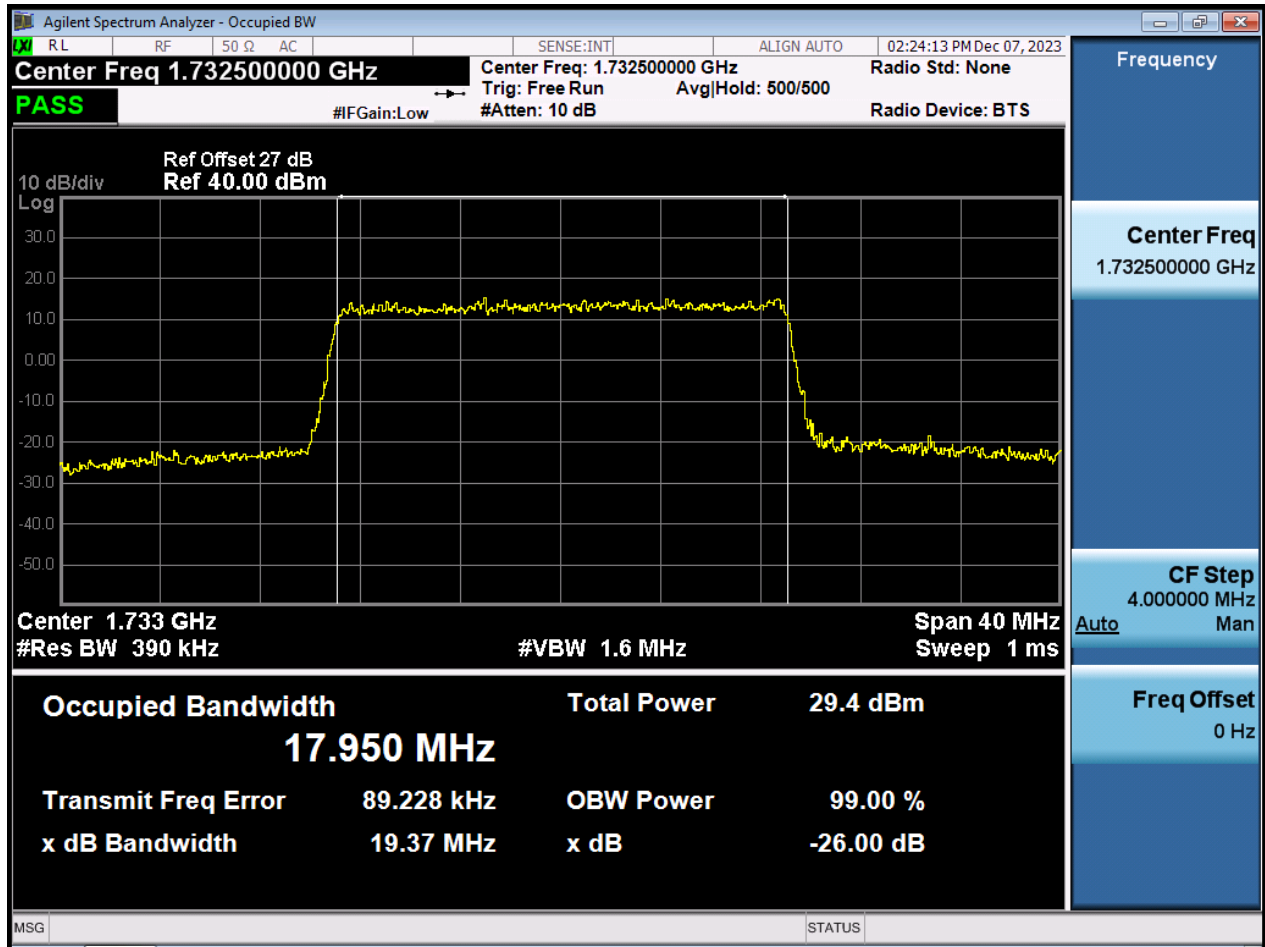


BW20 M\_OBW\_Middle Channel\_256QAM\_FullIRB

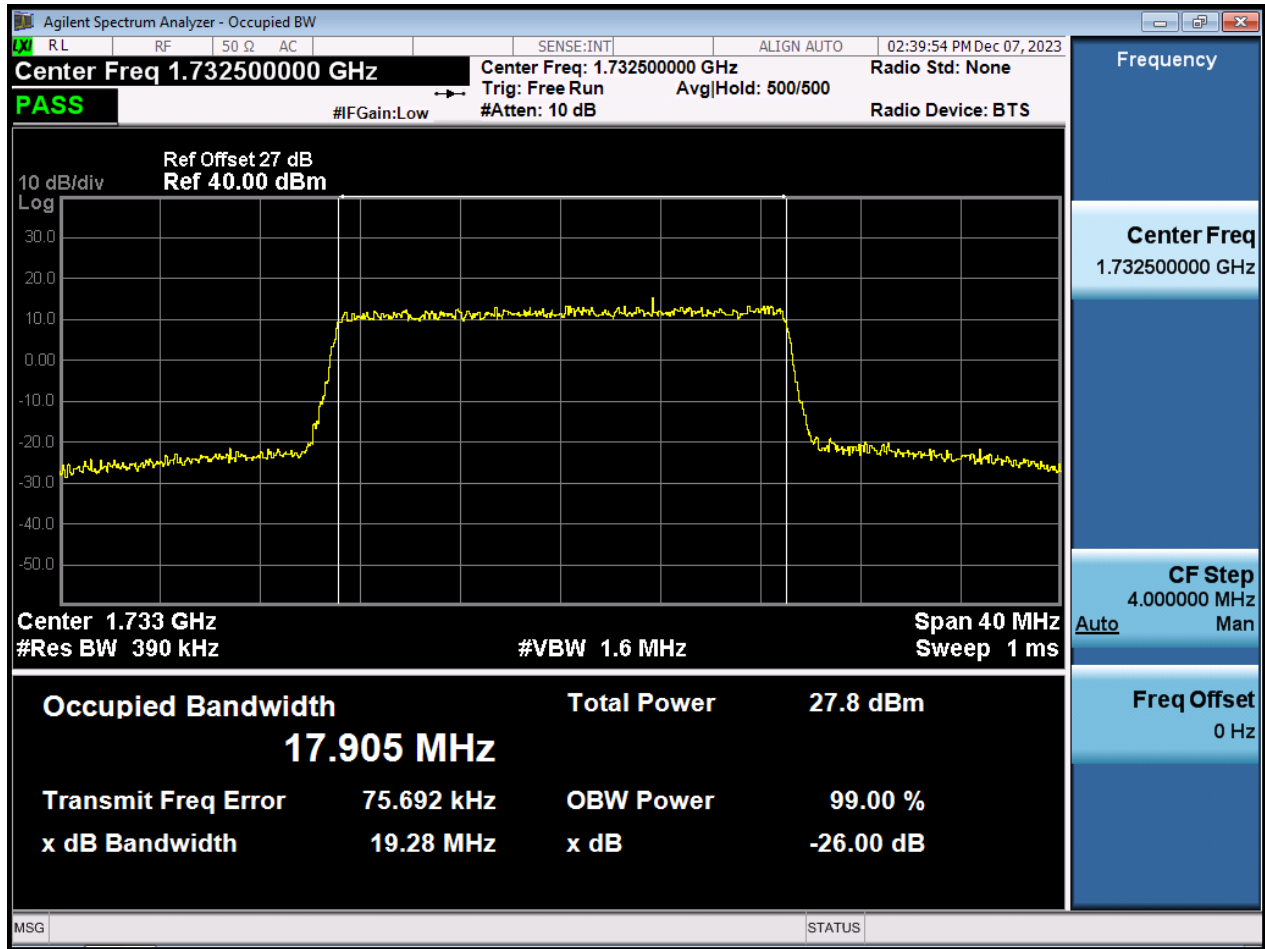


BW1.4 M\_PAR\_Middle Channel\_QPSK\_FullIRB

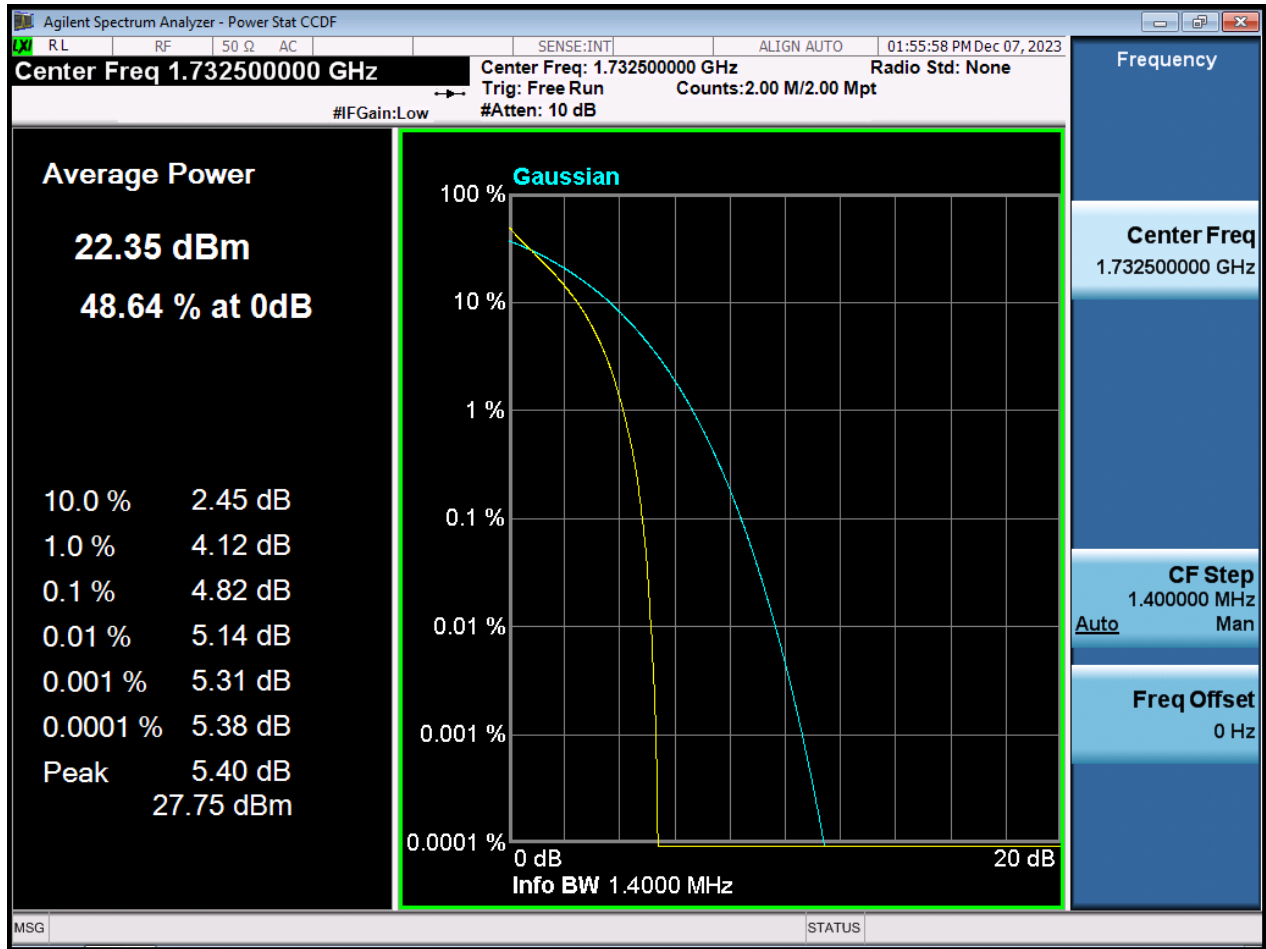


BW1.4 M\_PAR\_Middle Channel\_16QAM\_FullIRB

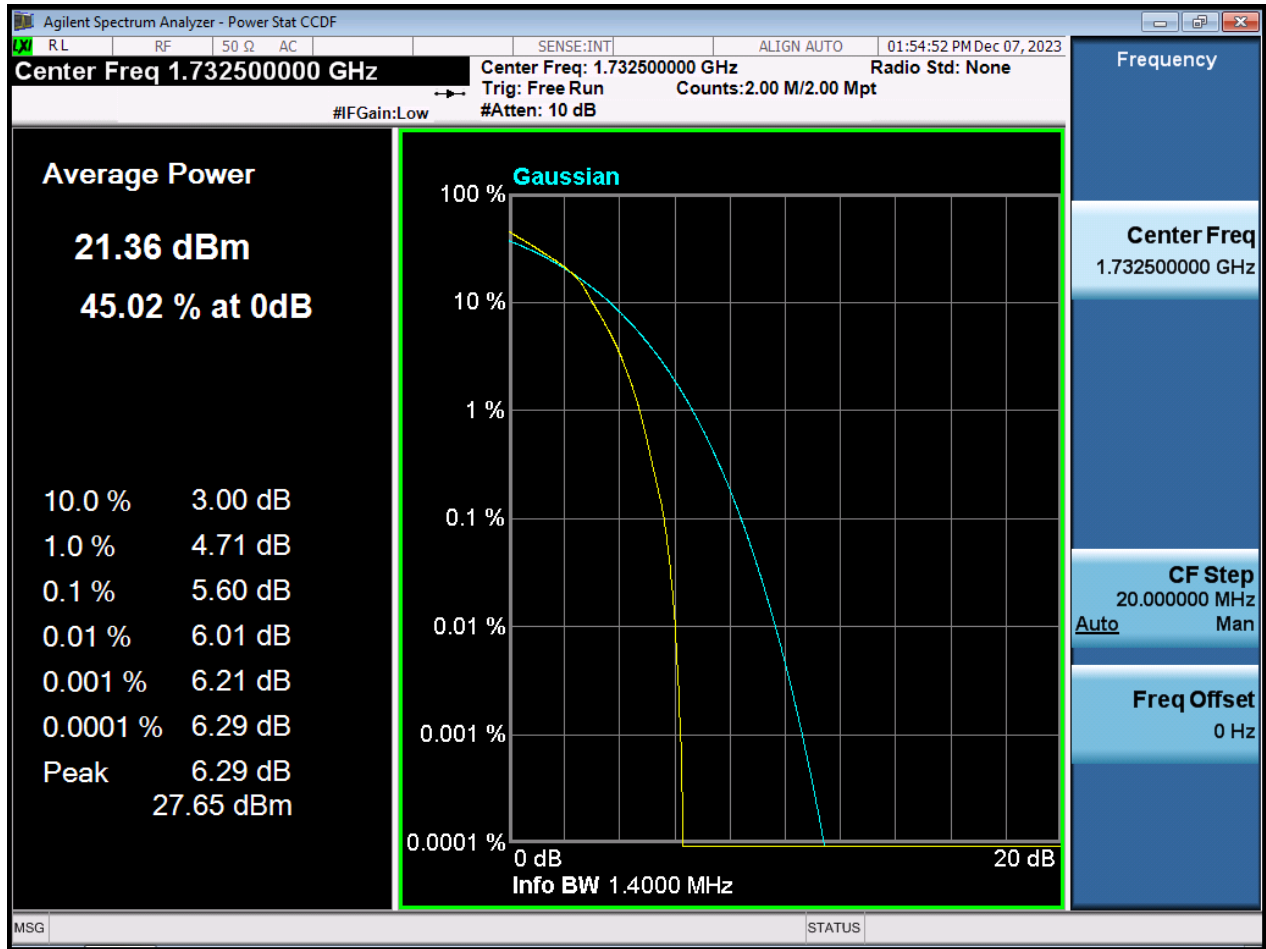


BW1.4 M\_PAR\_Middle Channel\_64QAM\_FullIRB

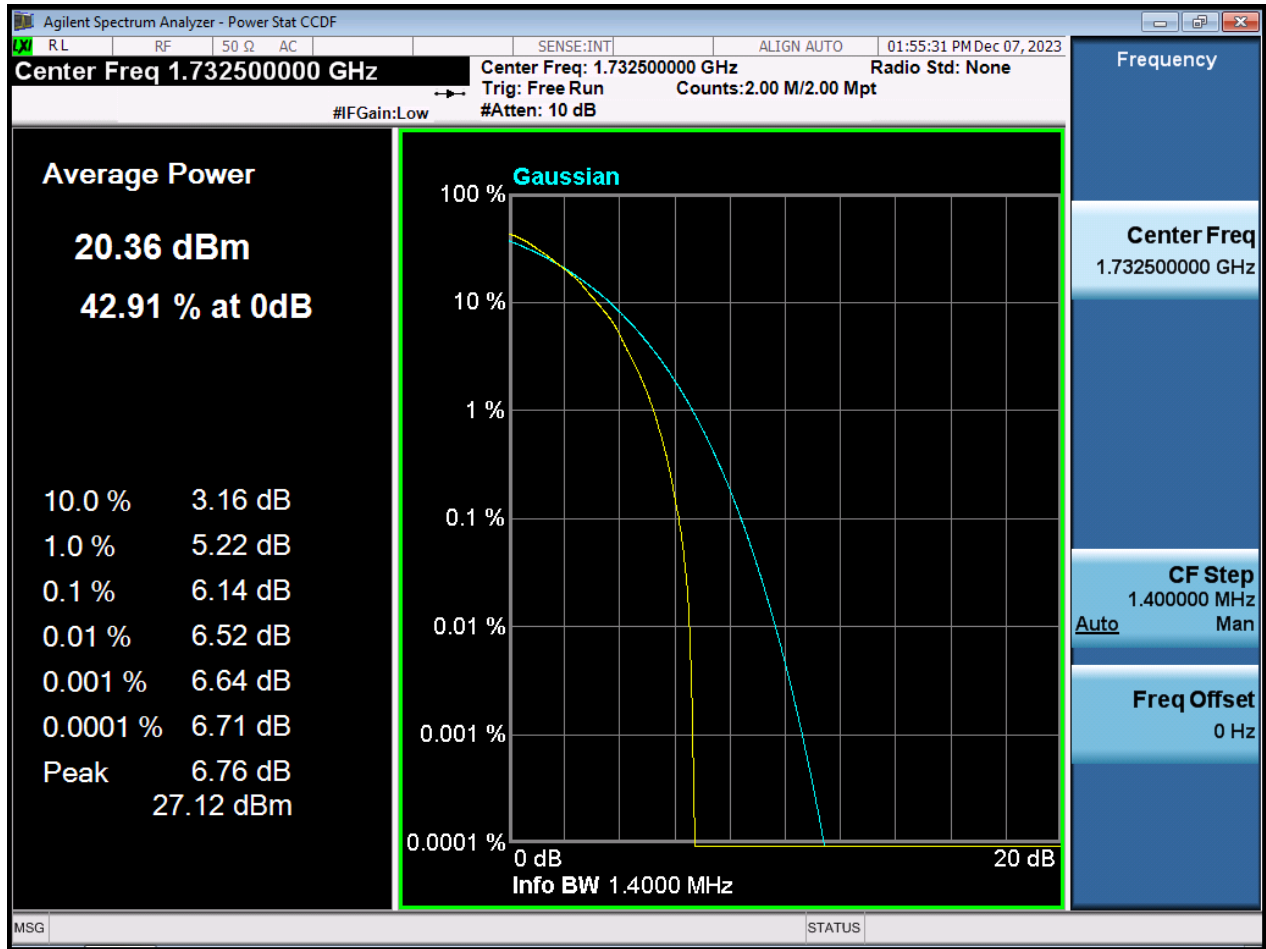


BW1.4 M\_PAR\_Middle Channel\_256QAM\_FullRB

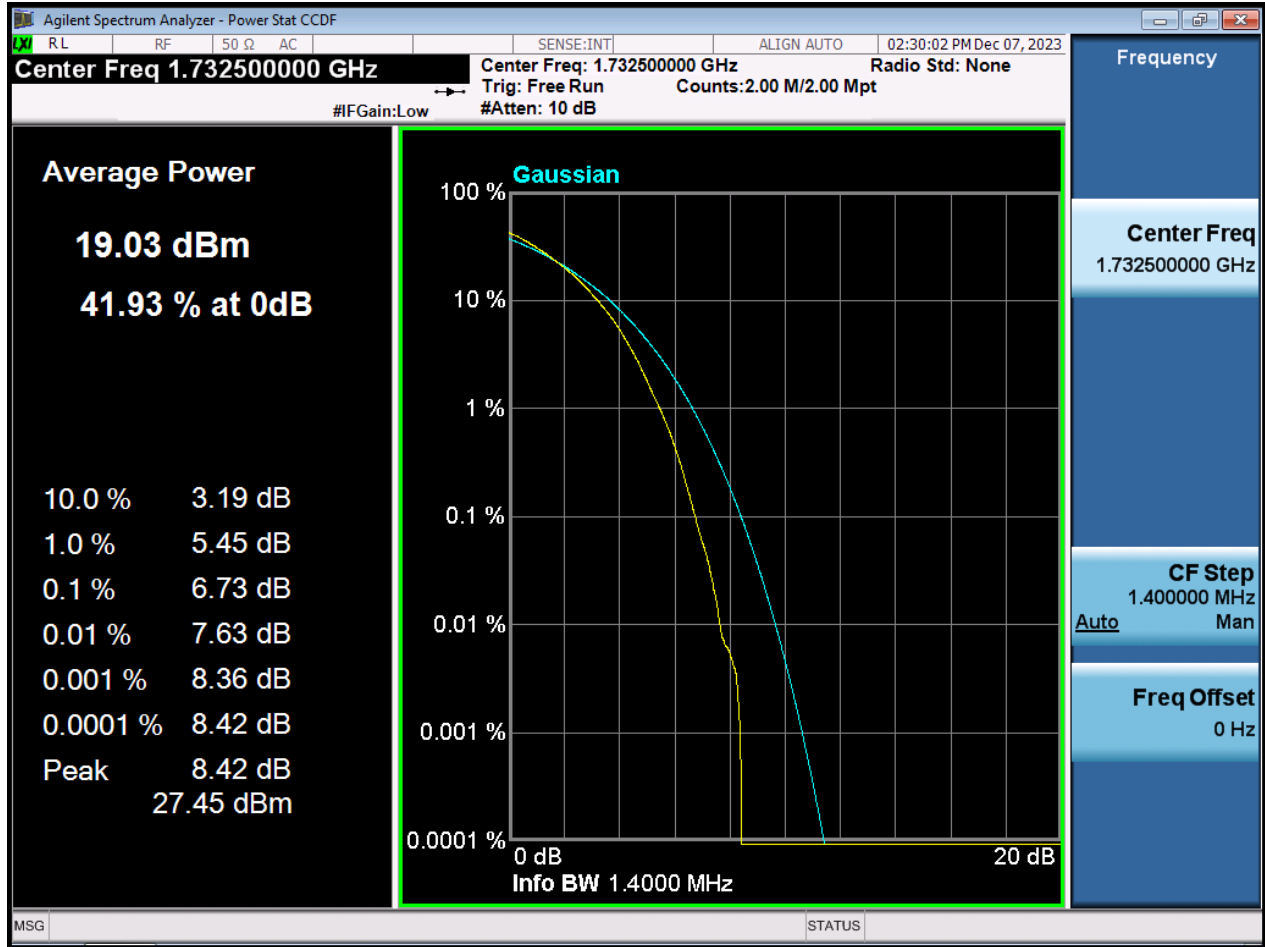

BW3 M\_PAR\_Middle Channel\_QPSK\_FullIRB

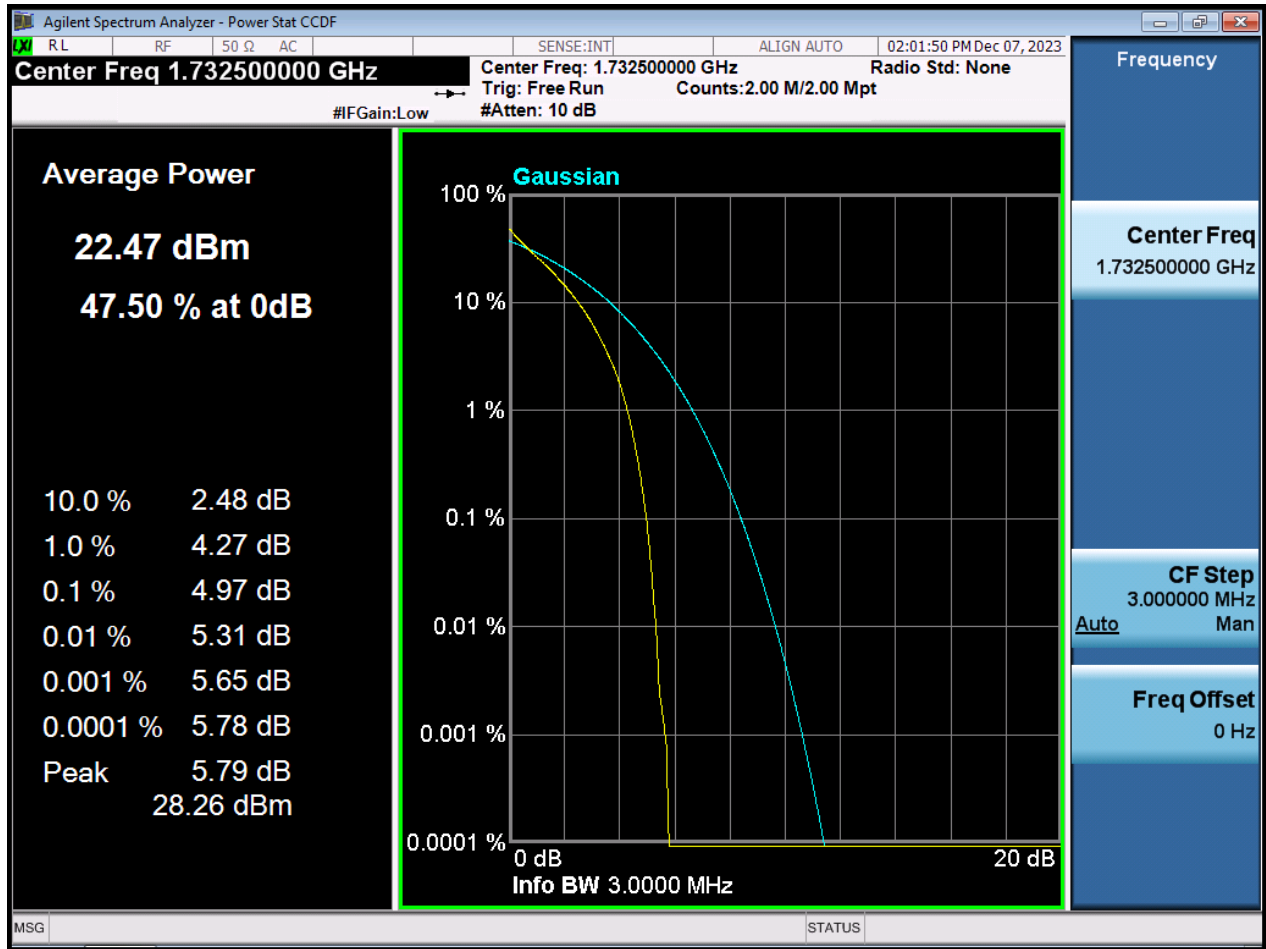


BW3 M\_PAR\_Middle Channel\_16QAM\_FullRB

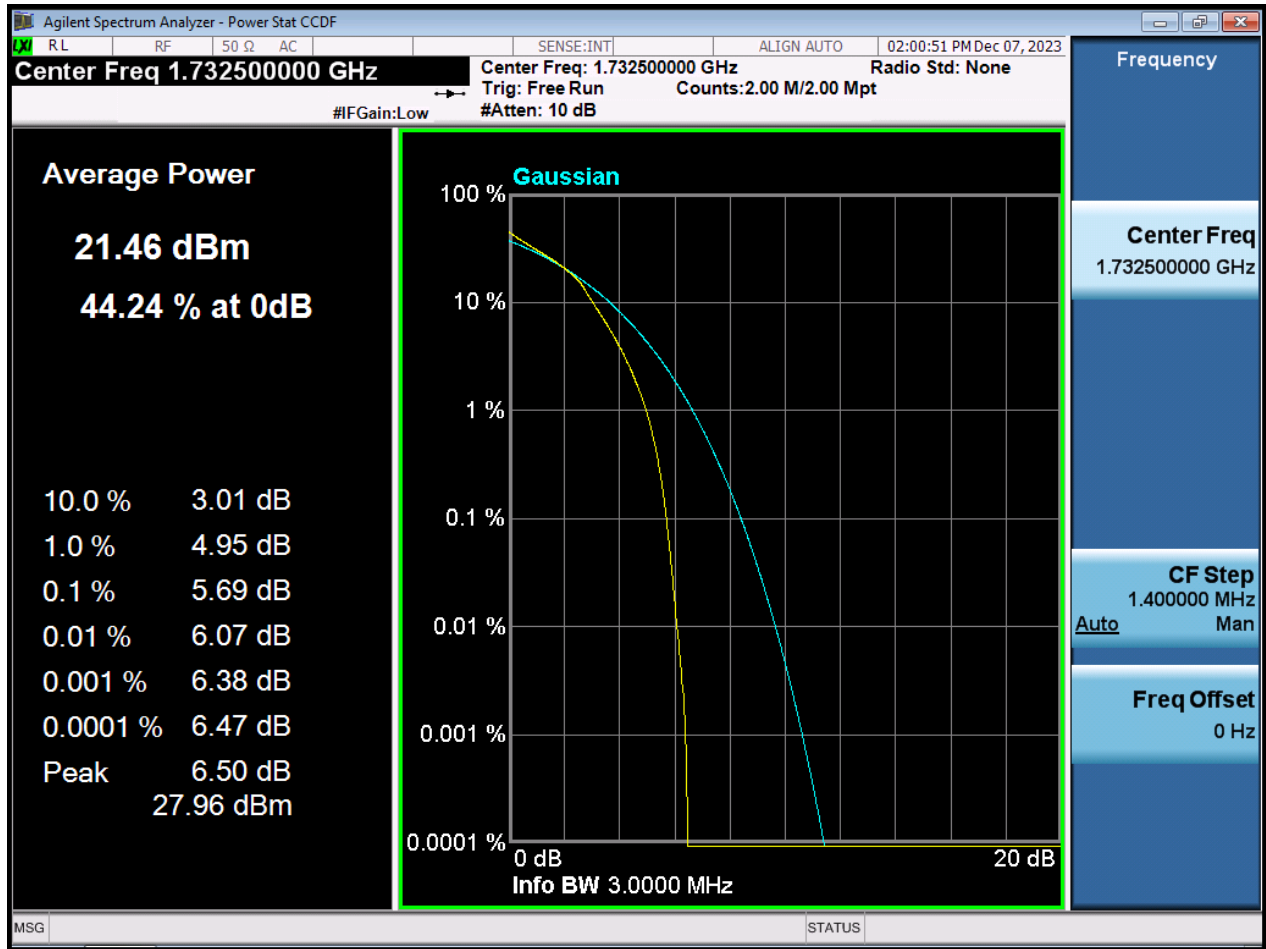





BW3 M\_PAR\_Middle Channel\_64QAM\_FullRB

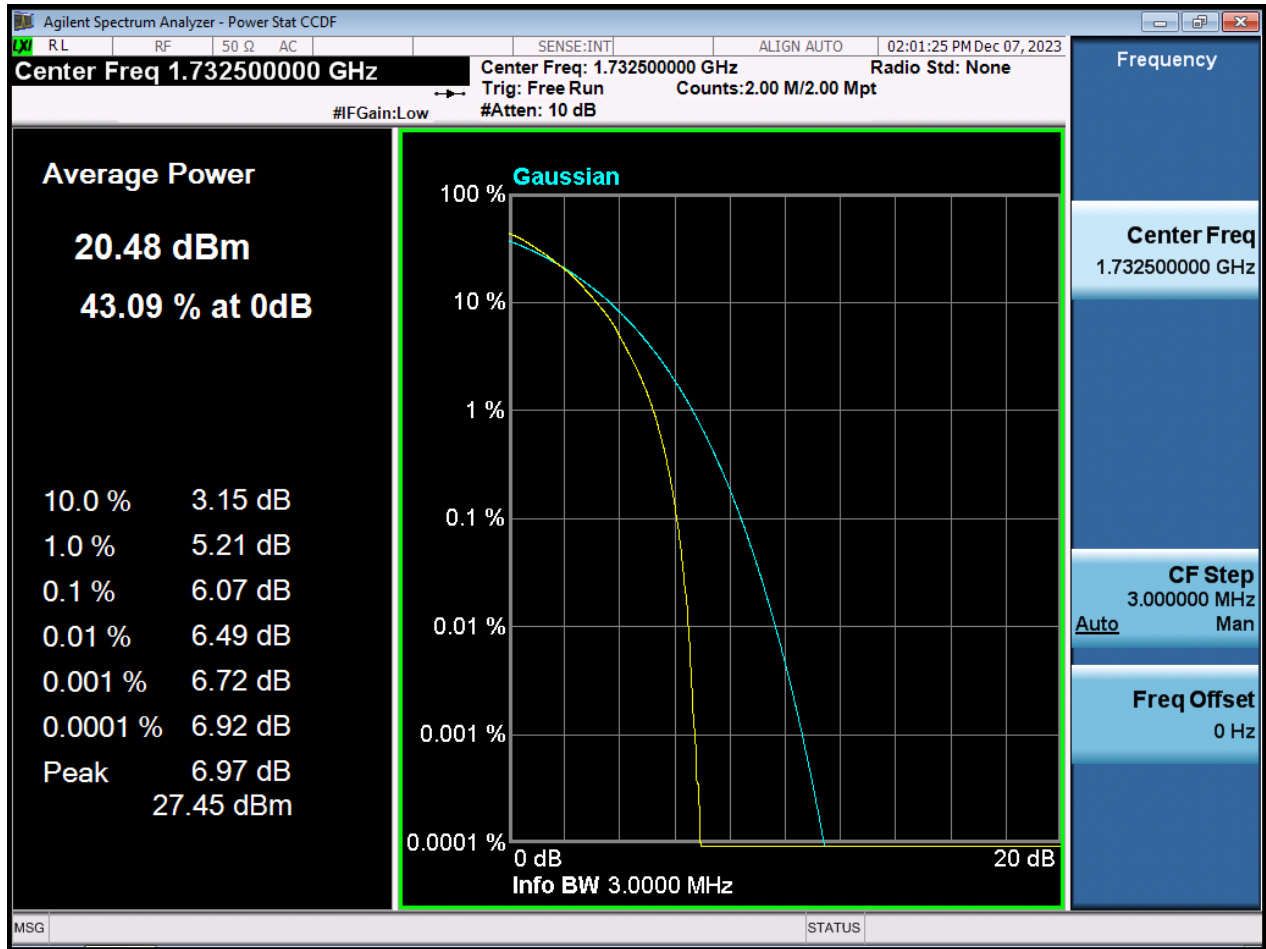


BW3 M\_PAR\_Middle Channel\_256QAM\_FullRB

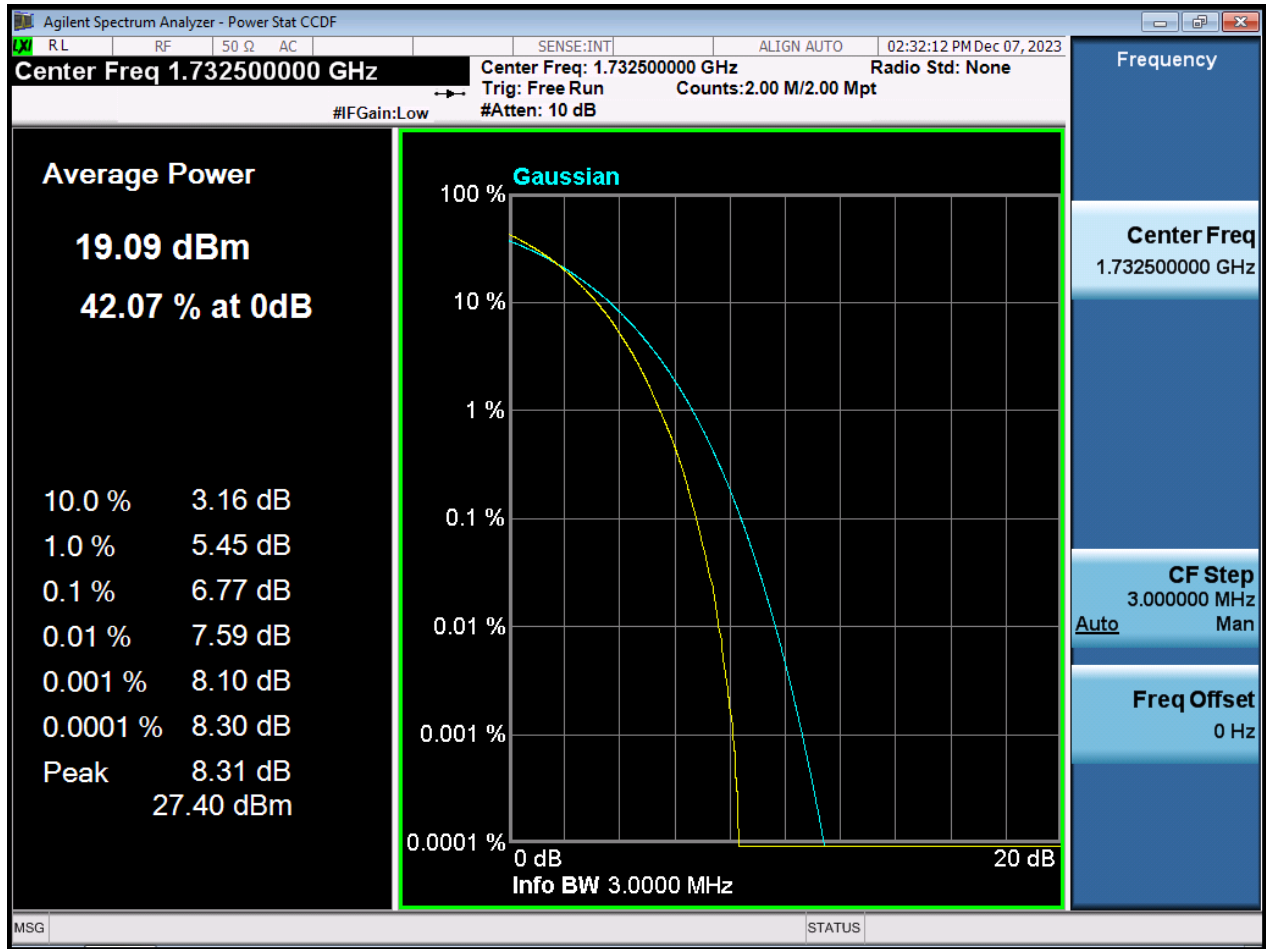


BW5 M\_PAR\_Middle Channel\_QPSK\_FullIRB

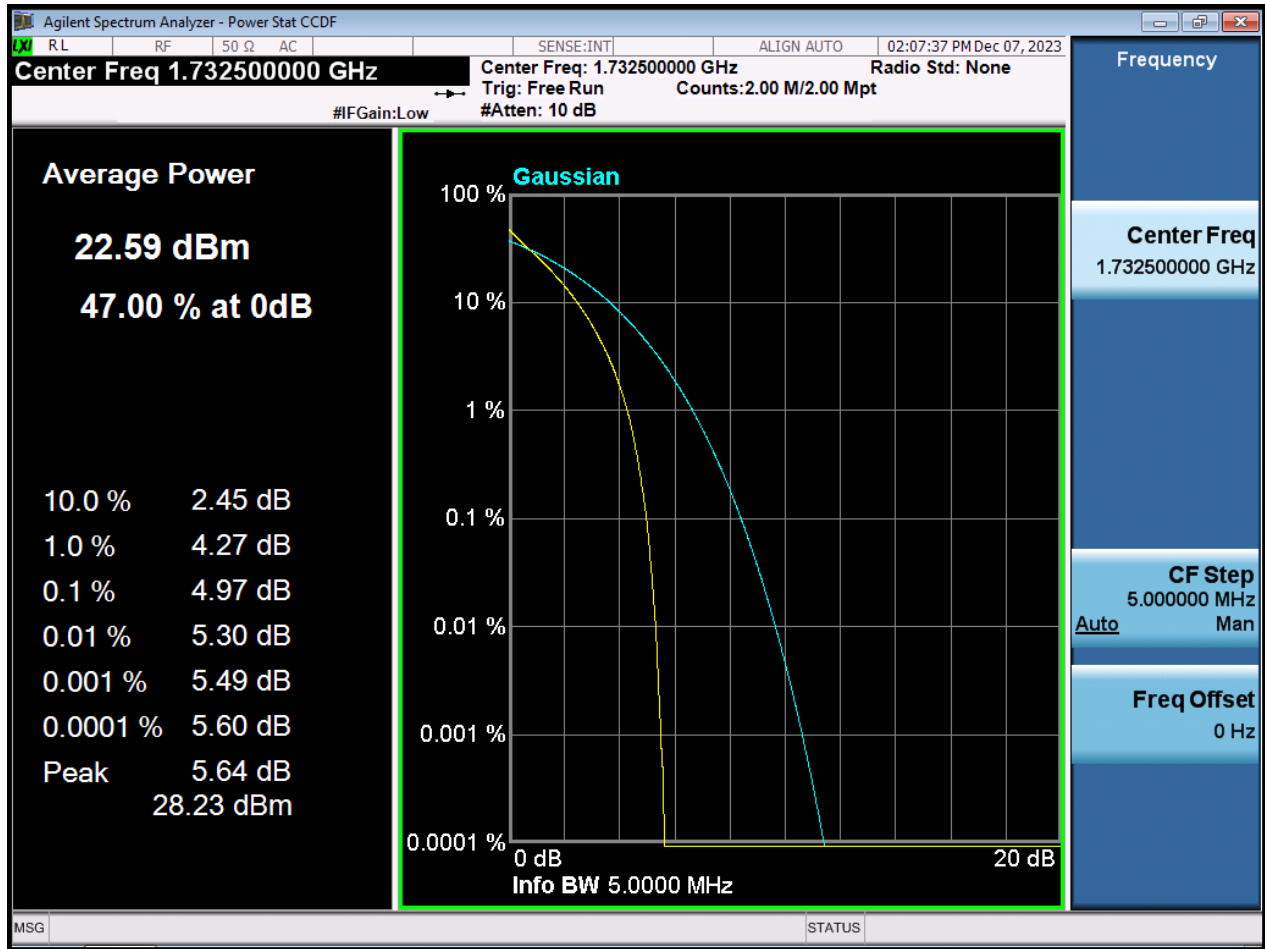


BW5 M\_PAR\_Middle Channel\_16QAM\_FullRB

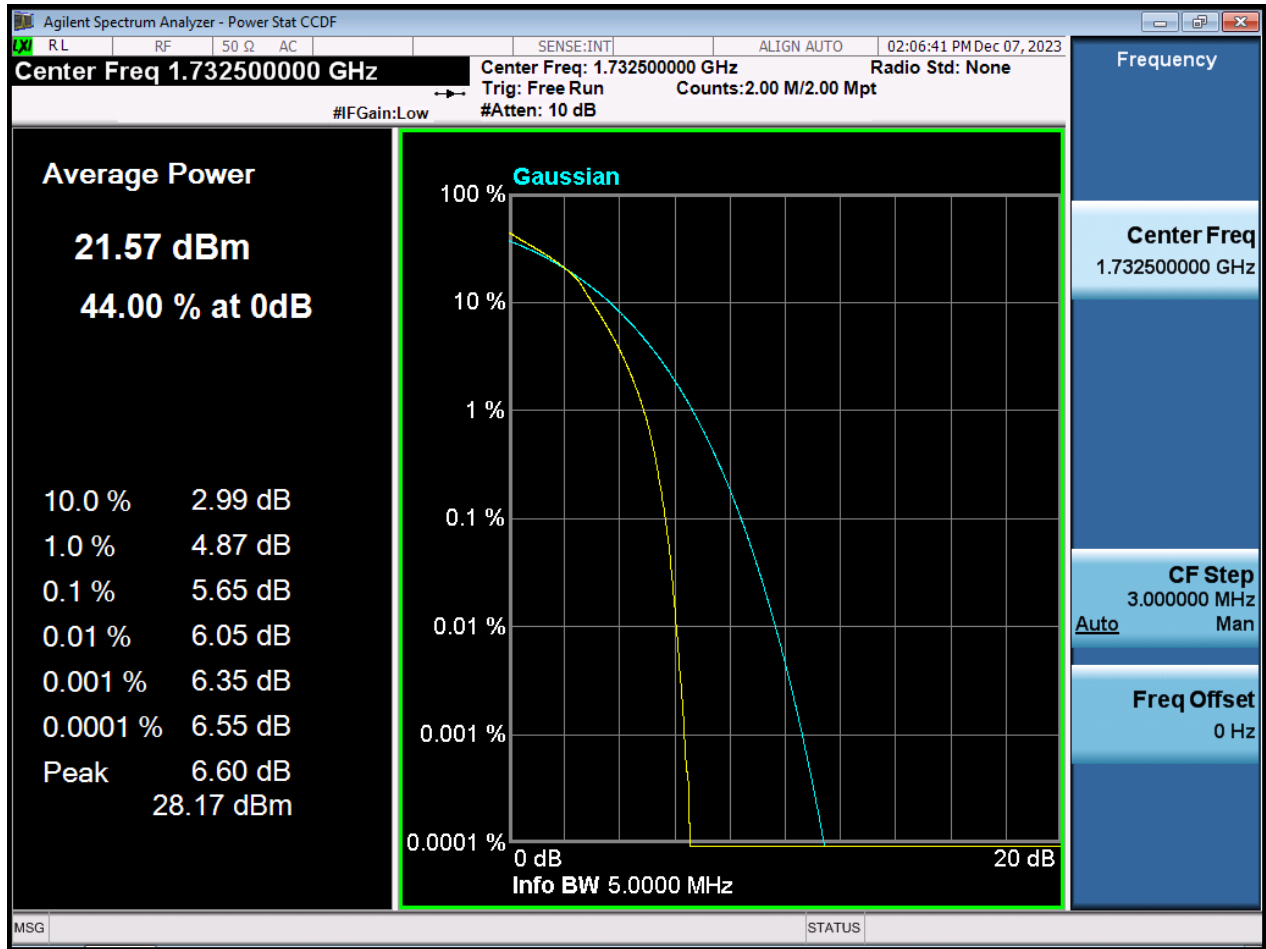


BW5 M\_PAR\_Middle Channel\_64QAM\_FullRB

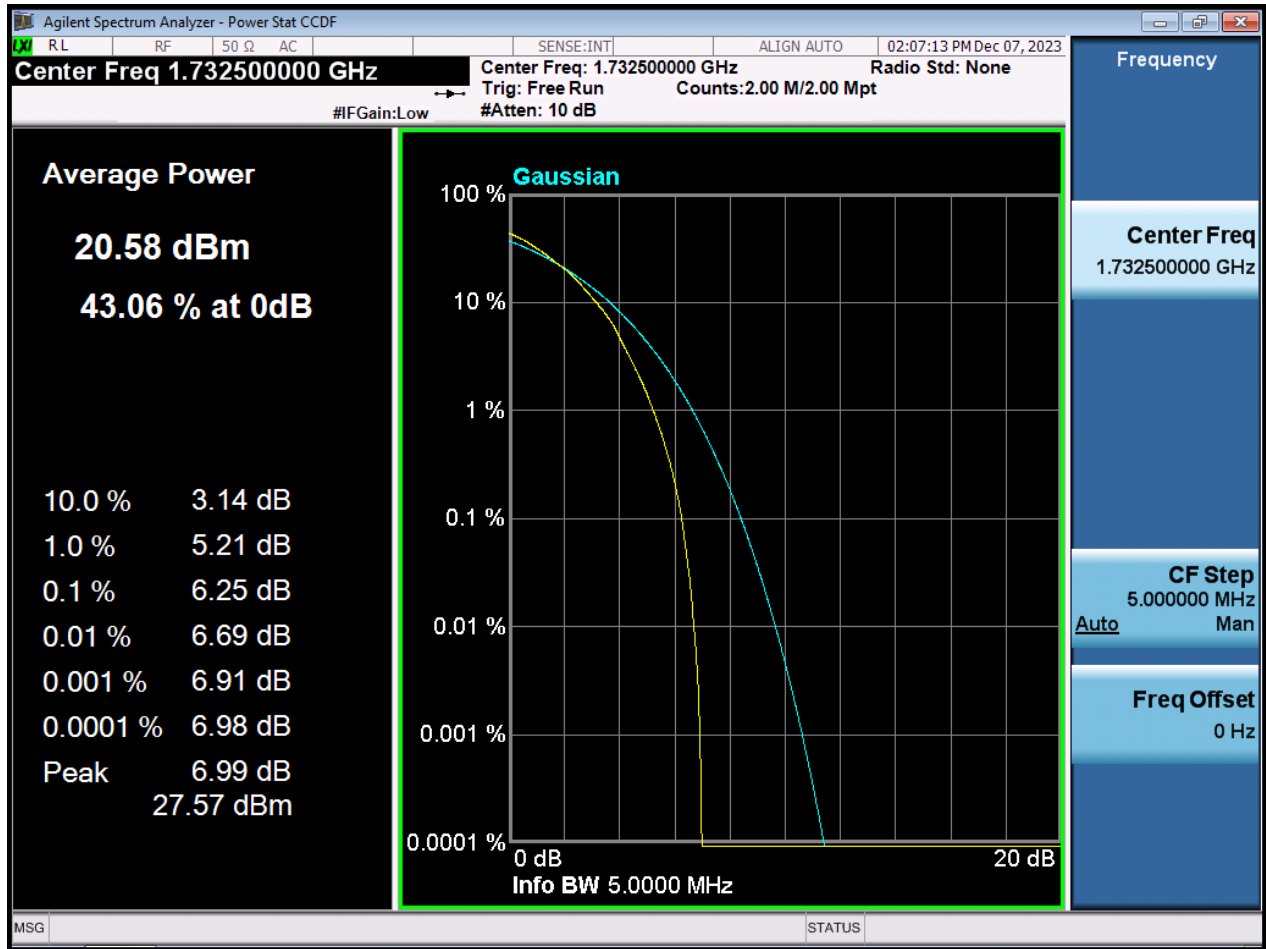


BW5 M\_PAR\_Middle Channel\_256QAM\_FullRB

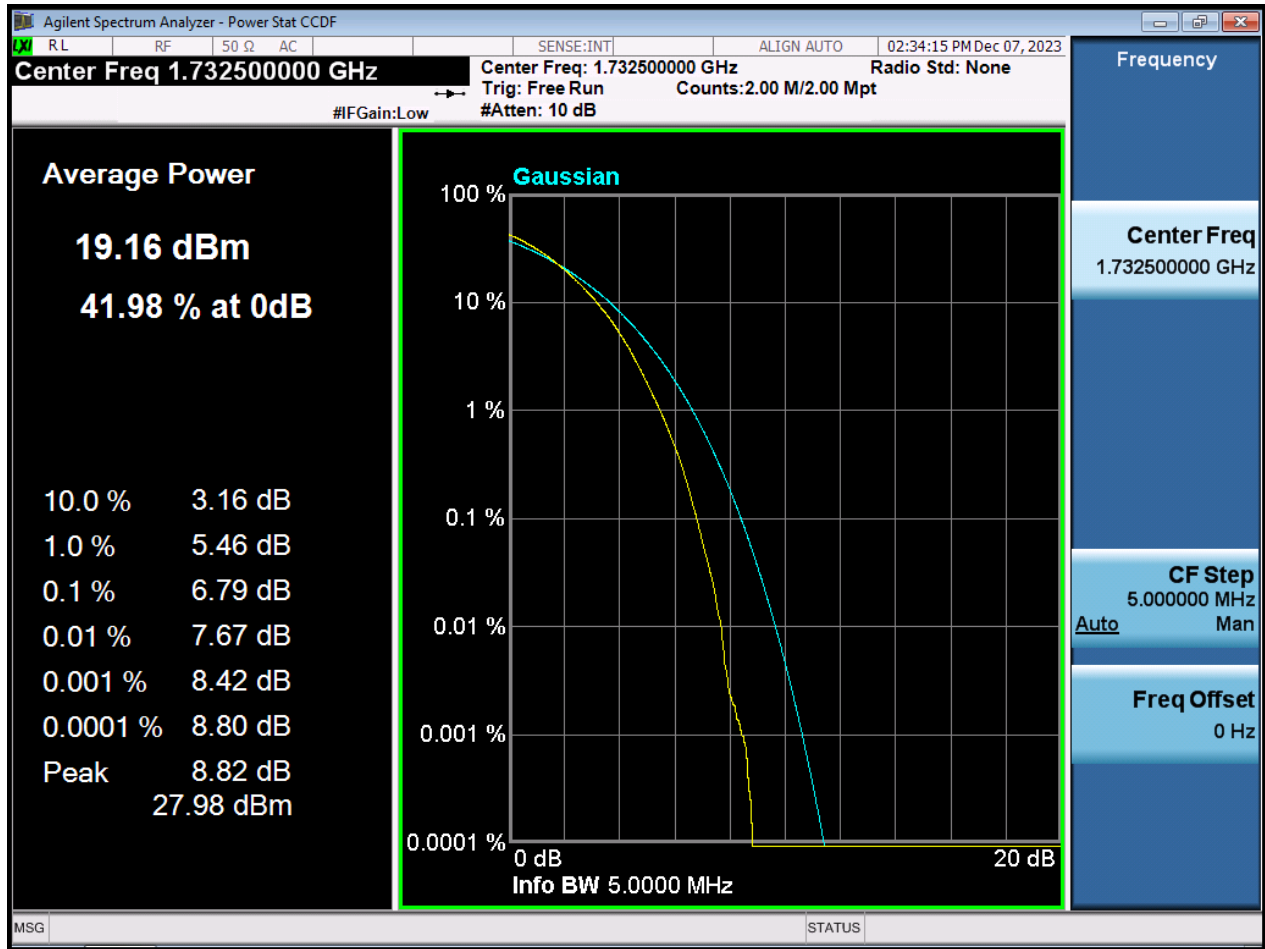

BW10 M\_PAR\_Middle Channelz\_QPSK\_FullRB

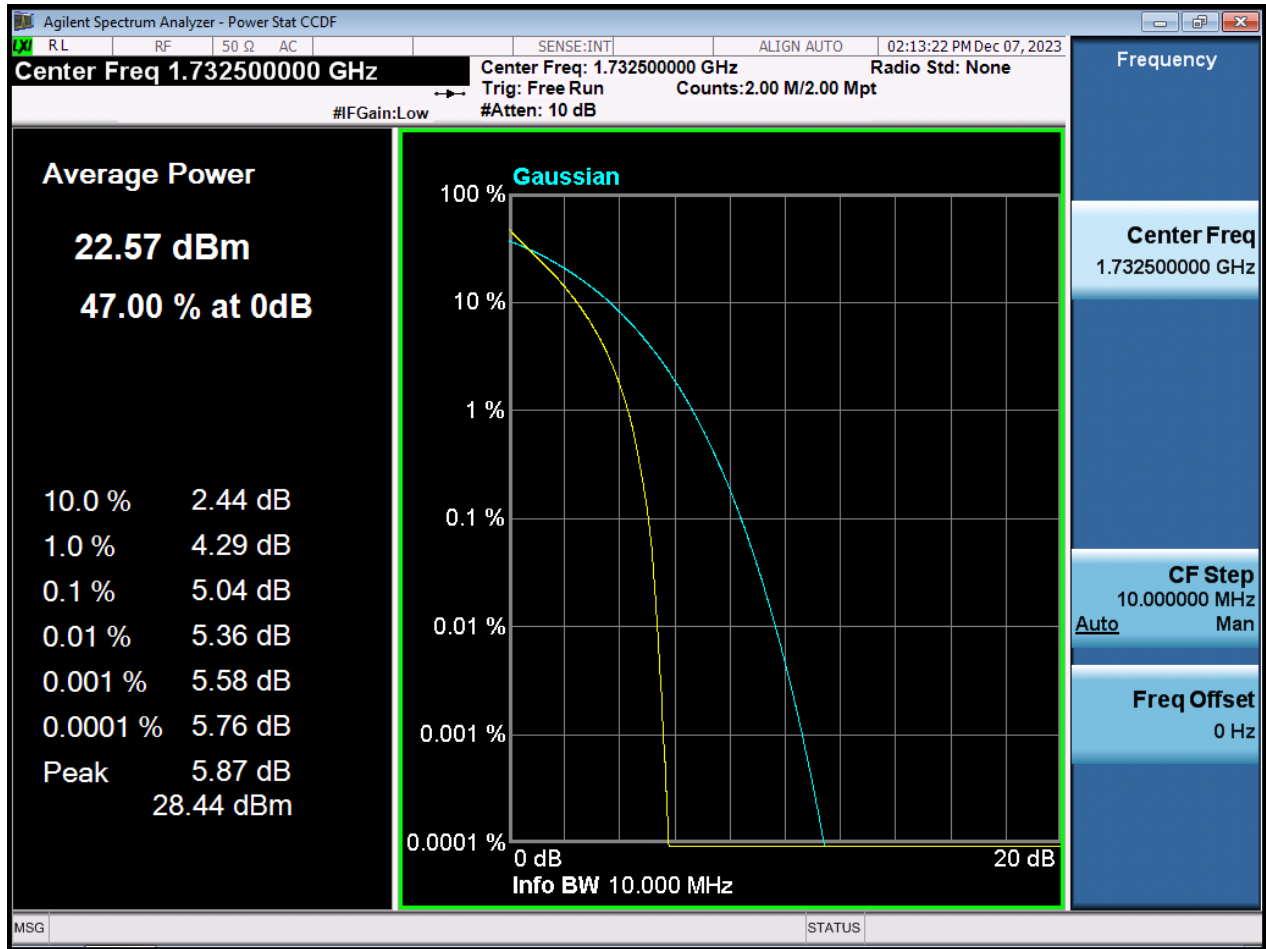


BW10 M\_PAR\_Middle Channel\_16QAM\_FullRB

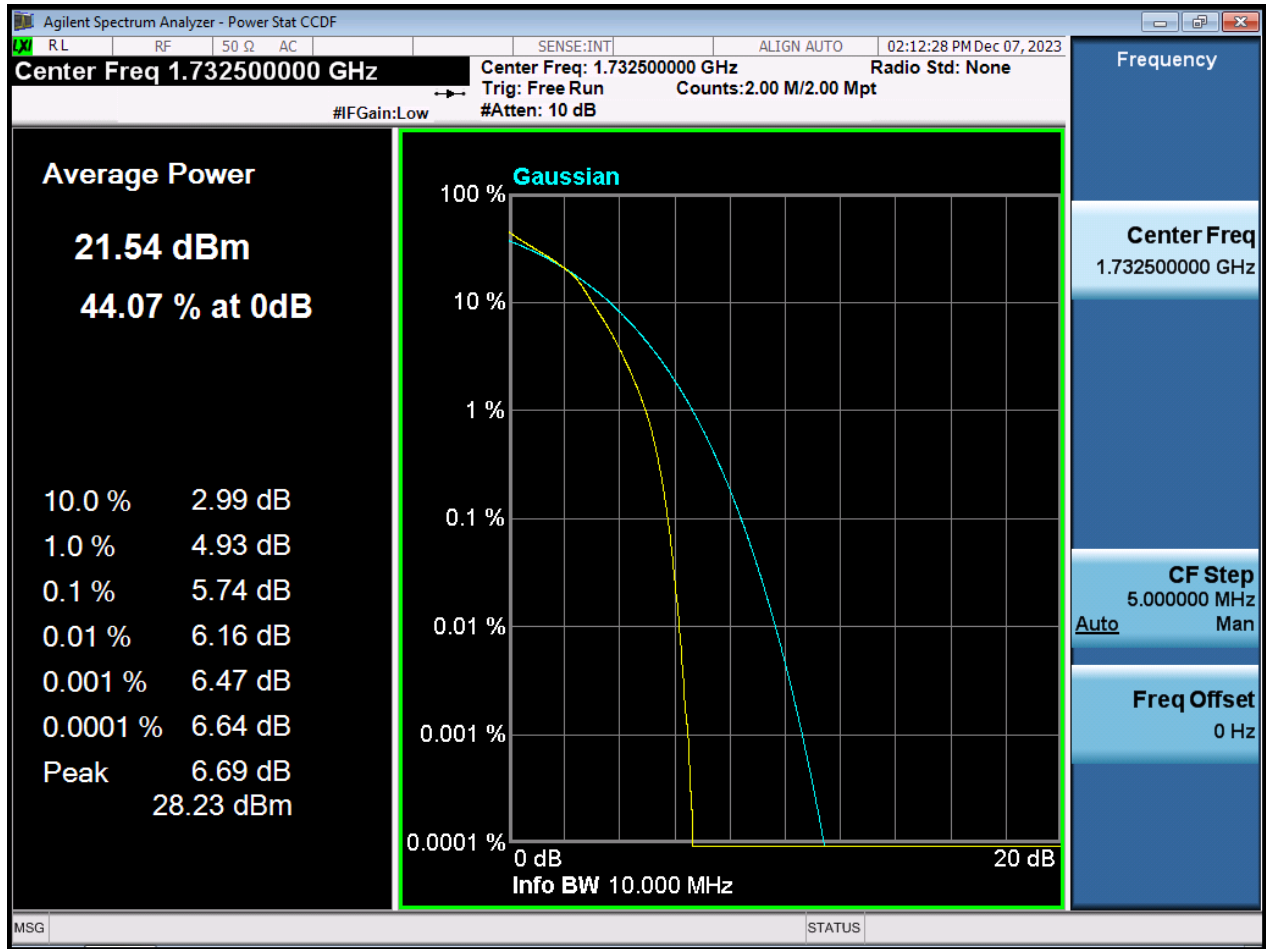





BW10 M\_PAR\_Middle Channel\_64QAM\_FullRB

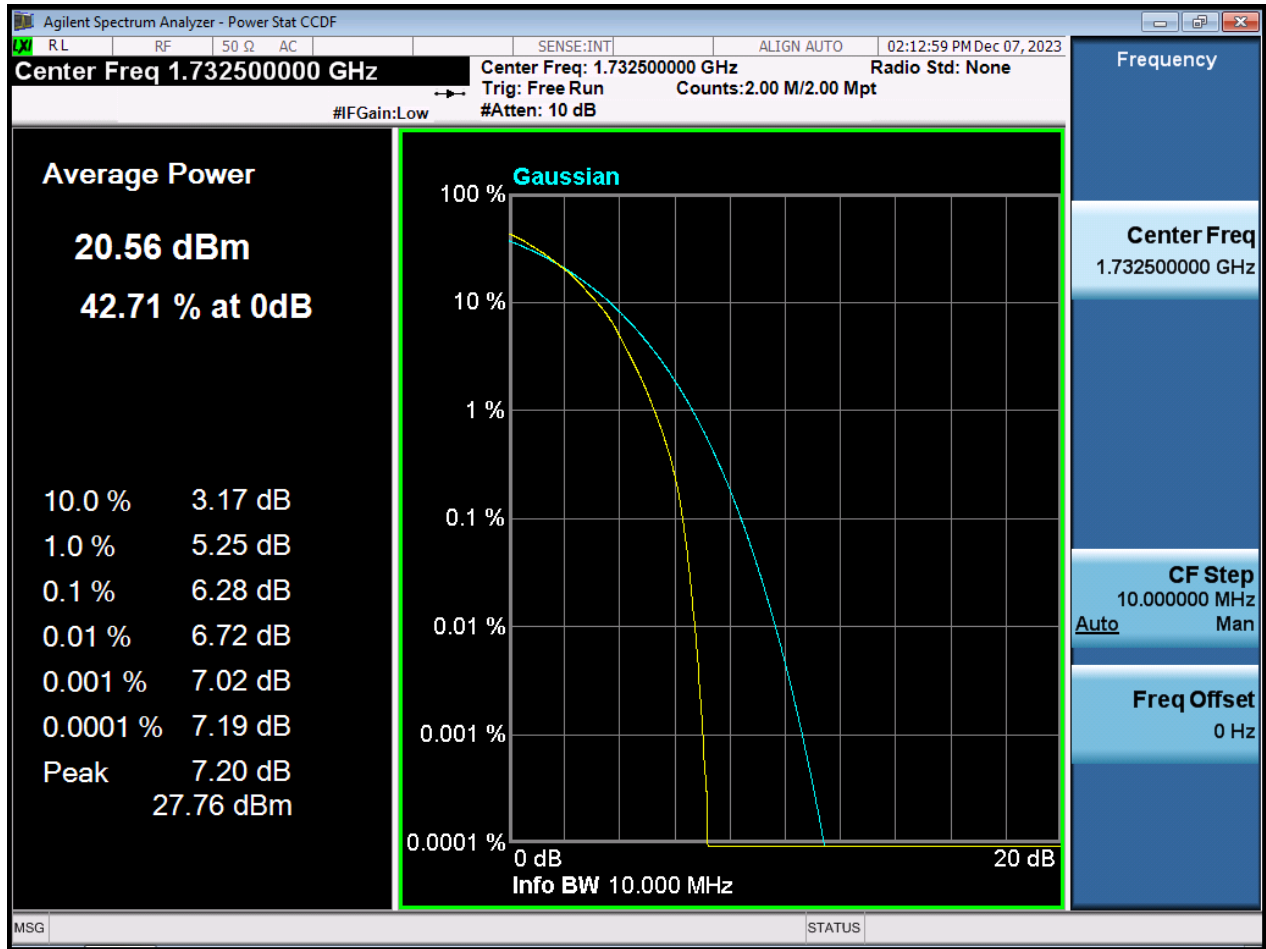


BW10 M\_PAR\_Middle Channel\_256QAM\_FullIRB

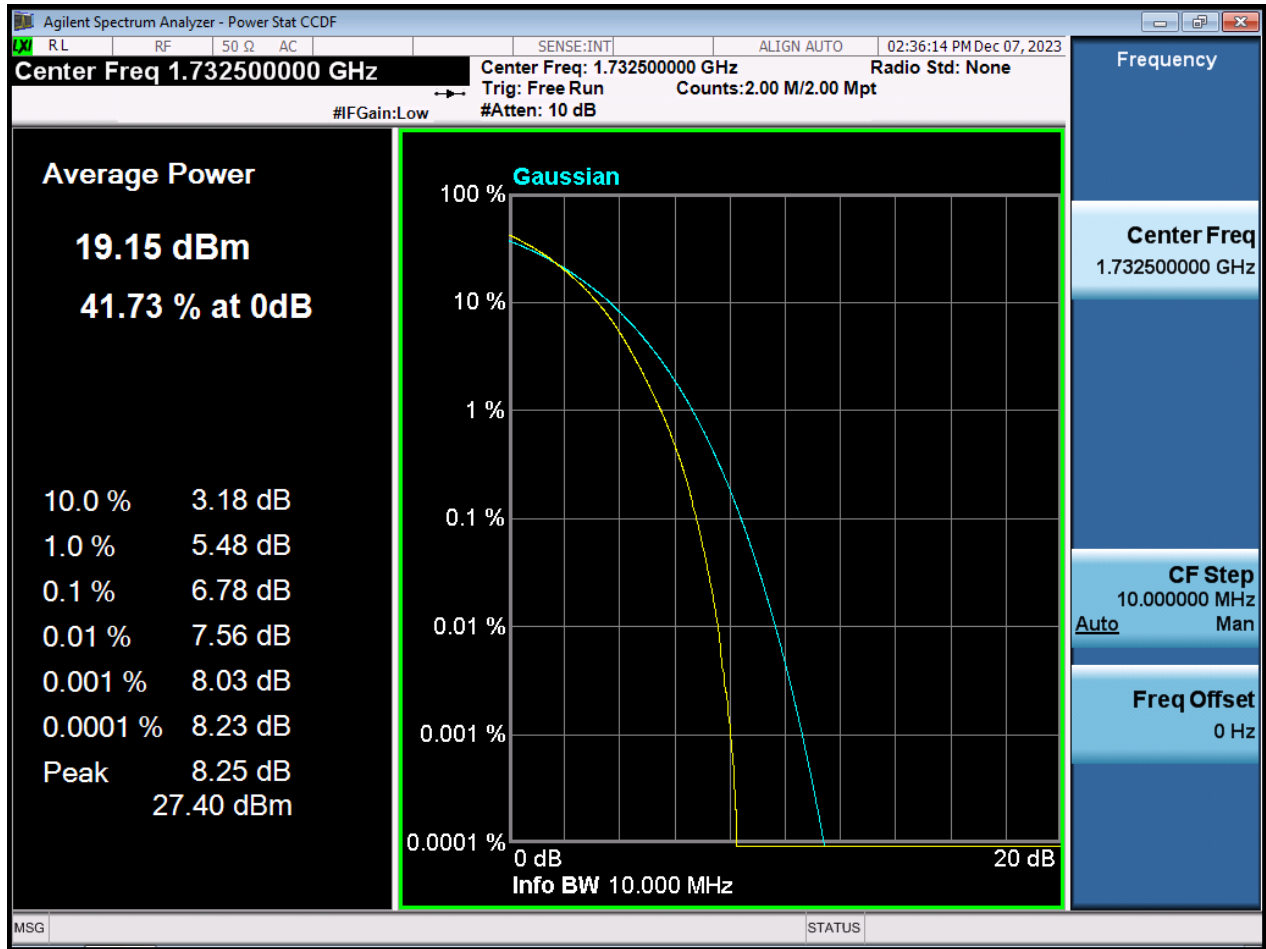


BW15 M\_PAR\_Middle Channel\_QPSK\_FullRB

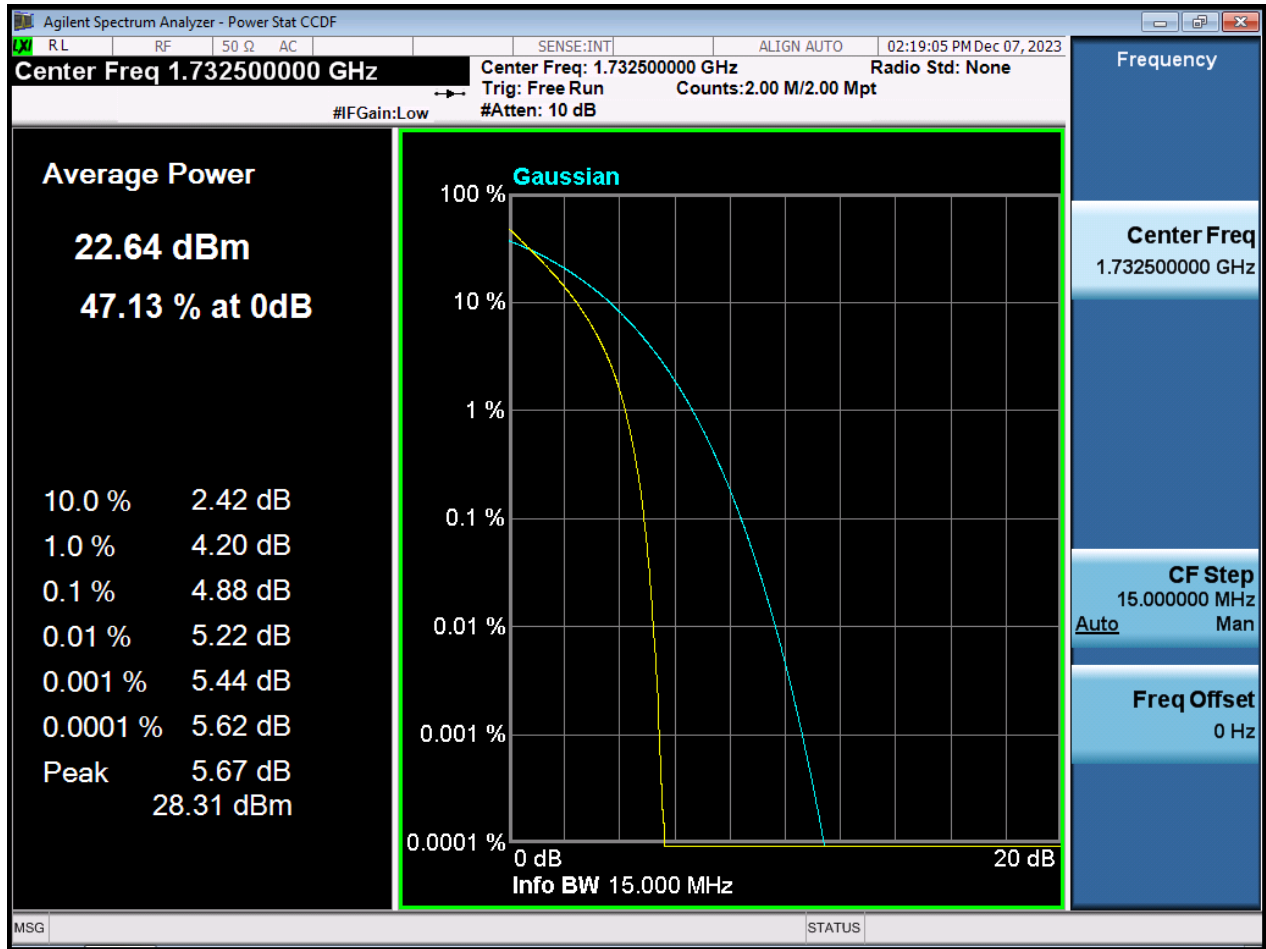


BW15 M\_PAR\_Middle Channel\_16QAM\_FullRB

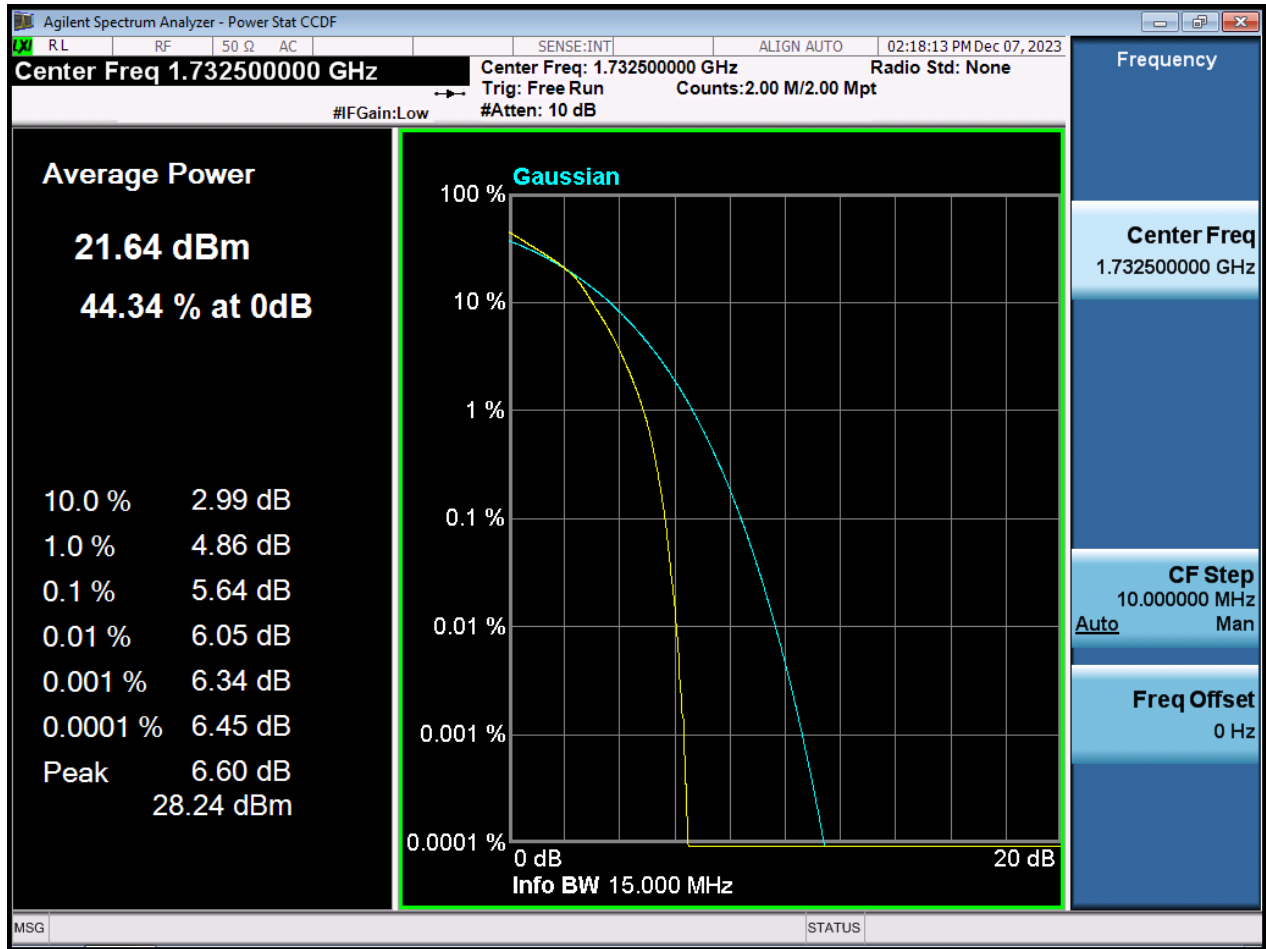


BW15 M\_PAR\_Middle Channel\_64QAM\_FullRB

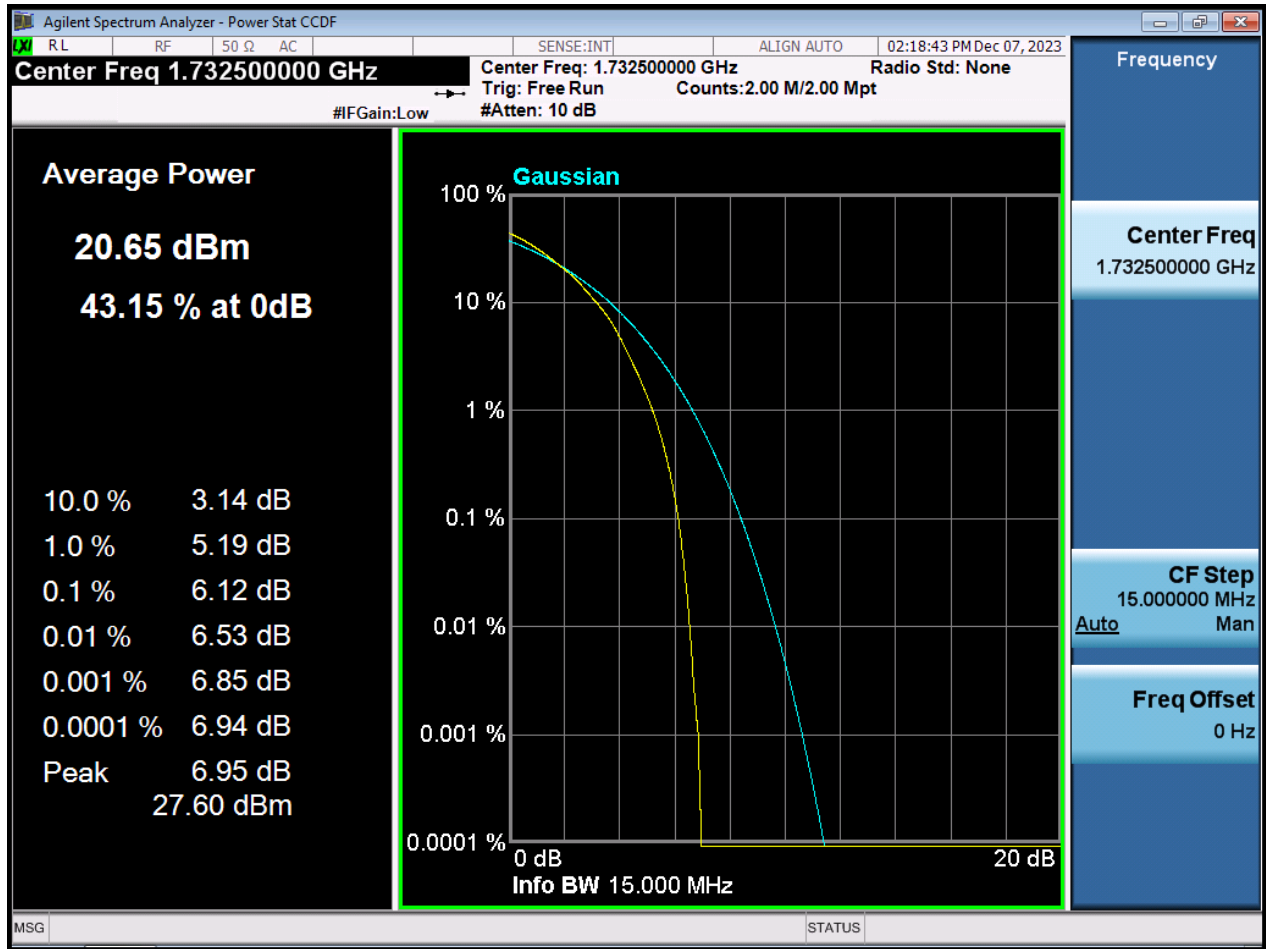


BW15 M\_PAR\_Middle Channel\_256QAM\_FullRB

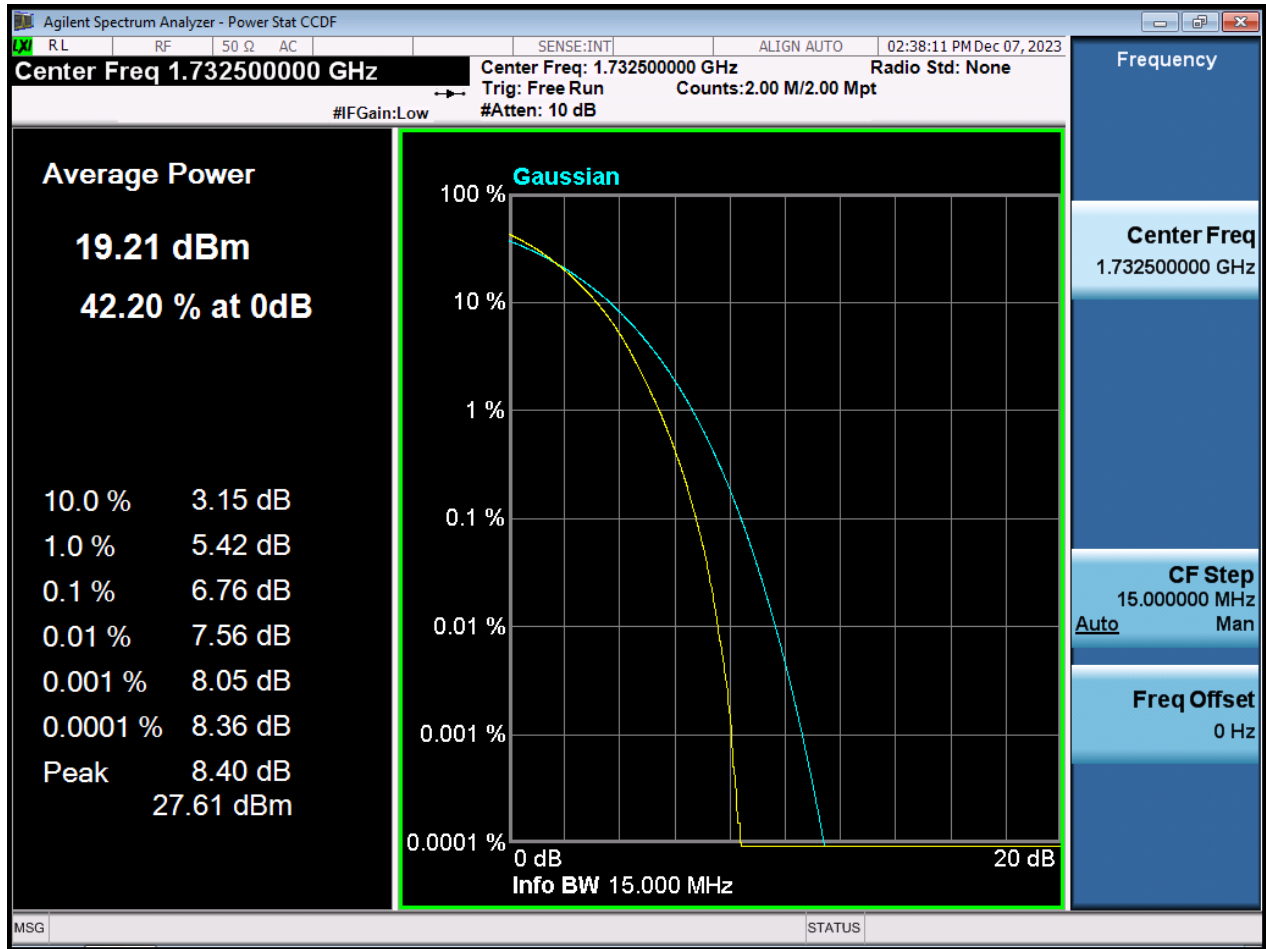

BW20 M\_PAR\_Middle Channel\_QPSK\_FullRB

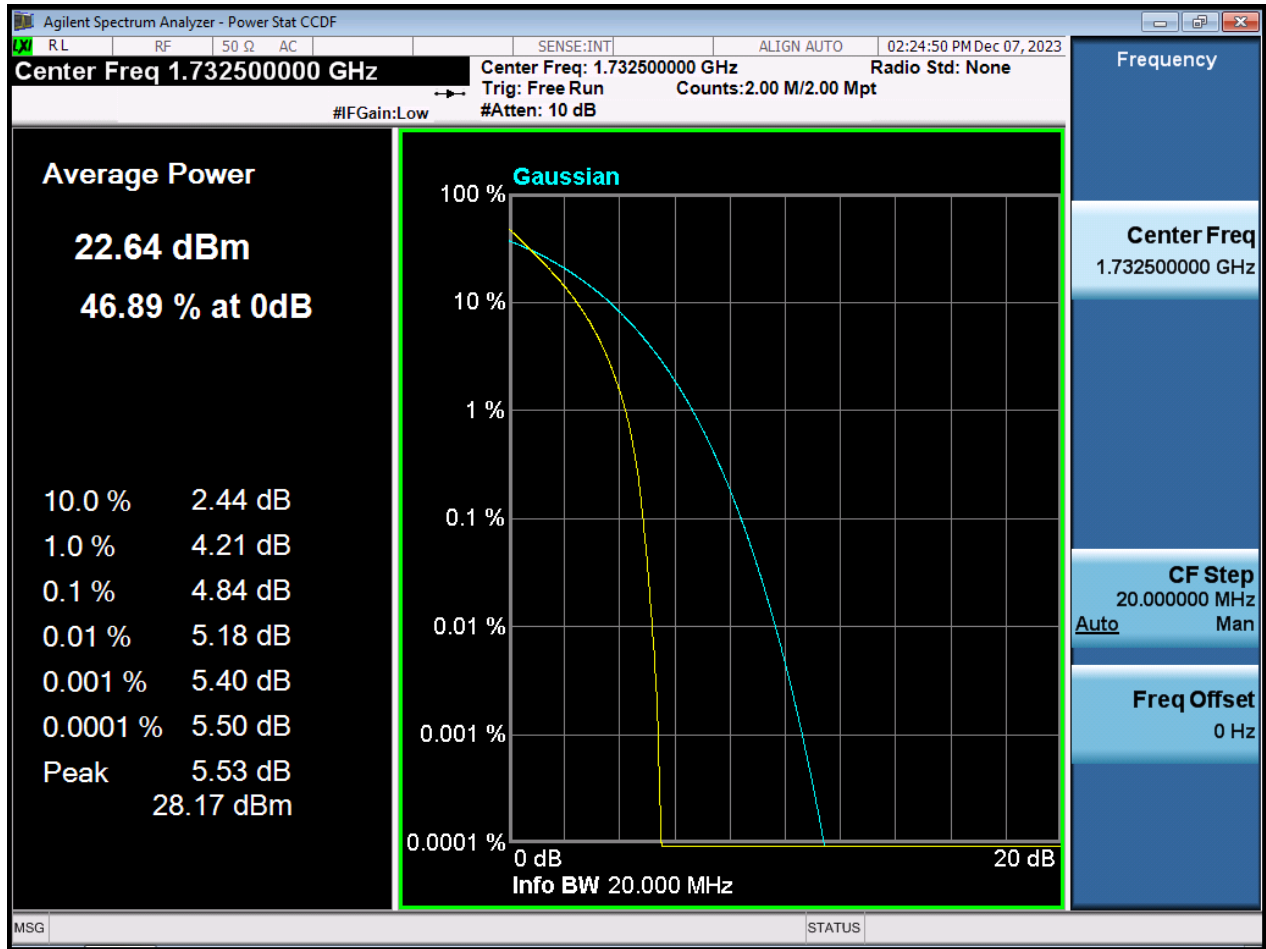


BW20 M\_PAR\_Middle Channel\_16QAM\_FullRB

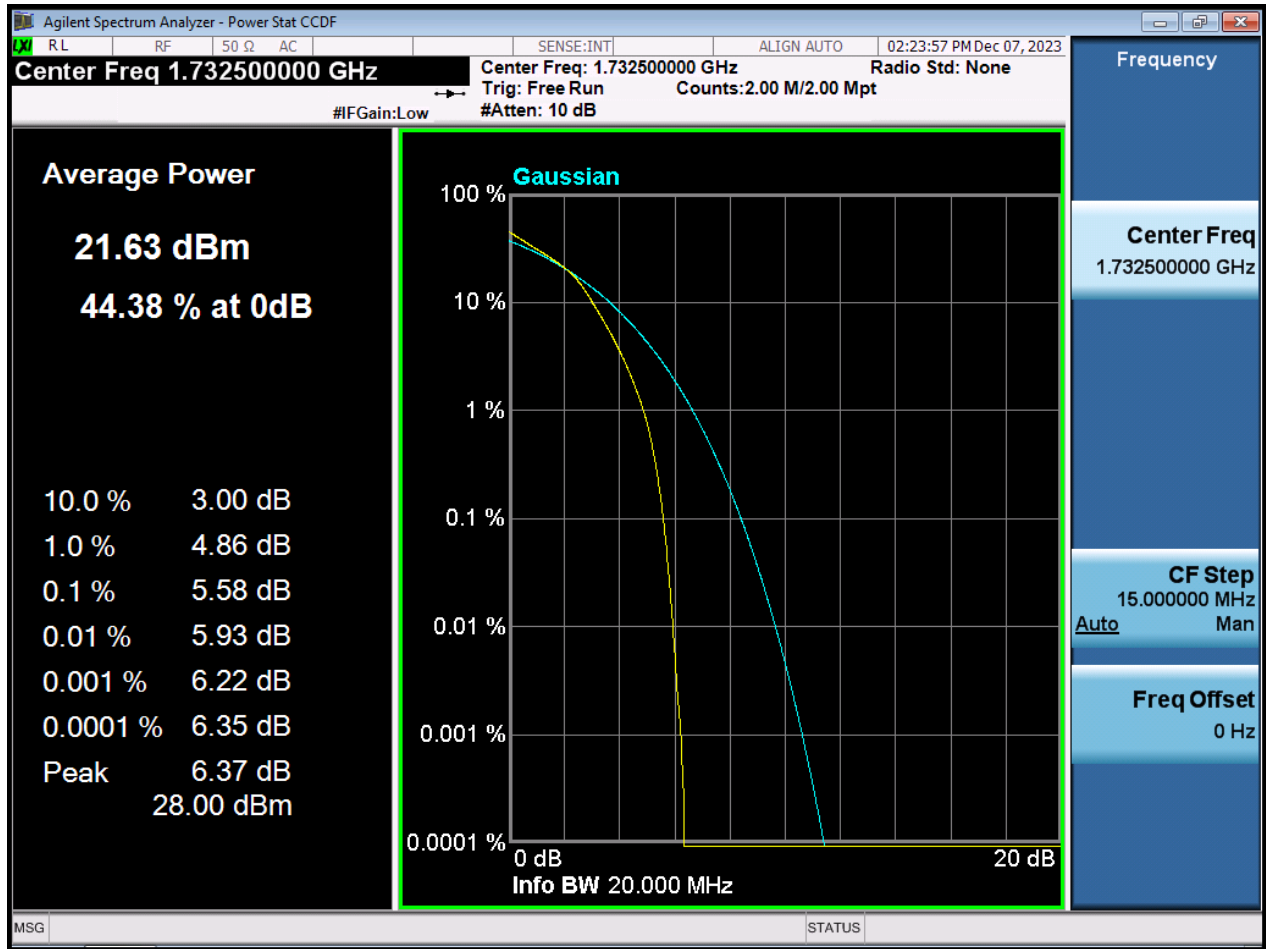





BW20 M\_PAR\_Middle Channel\_64QAM\_FullRB

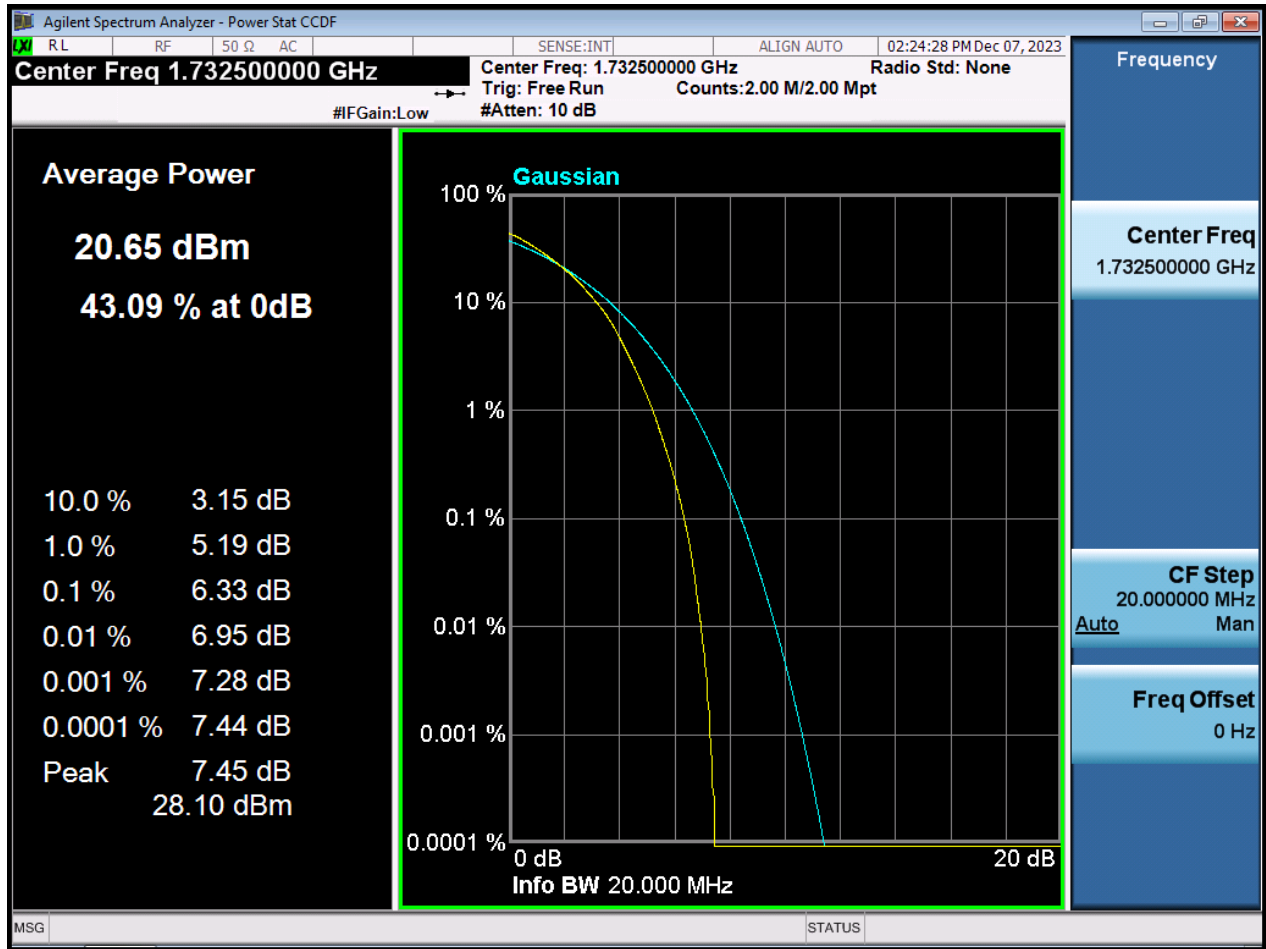


BW20 M\_PAR\_Middle Channel\_256QAM\_FullIRB

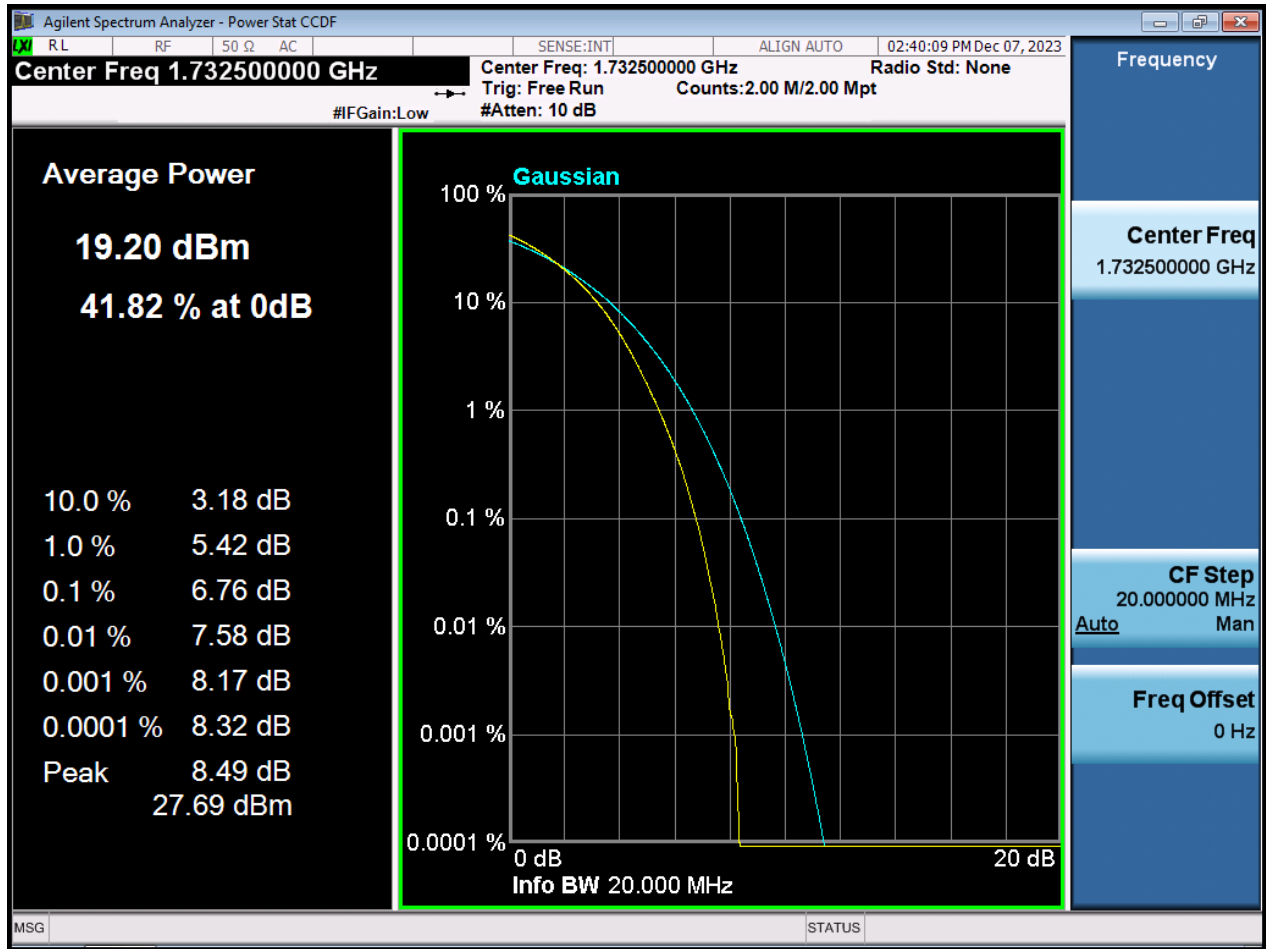


BW1.4 M\_CSE(30 M-10 G)\_Lowest Channel\_QPSK\_1RB

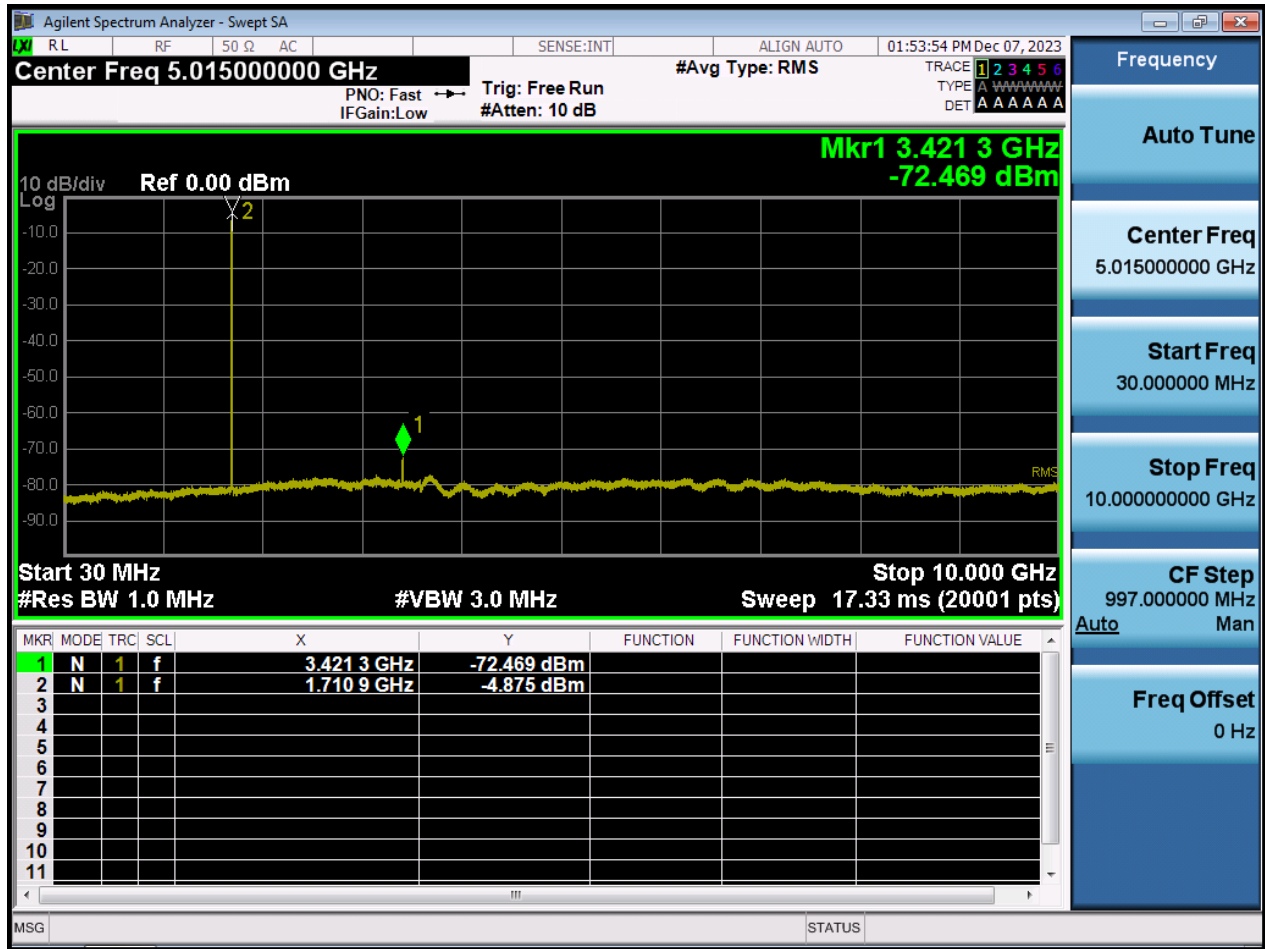


BW1.4 M\_CSE(30 M-10 G)\_Middle Channel\_QPSK\_1RB

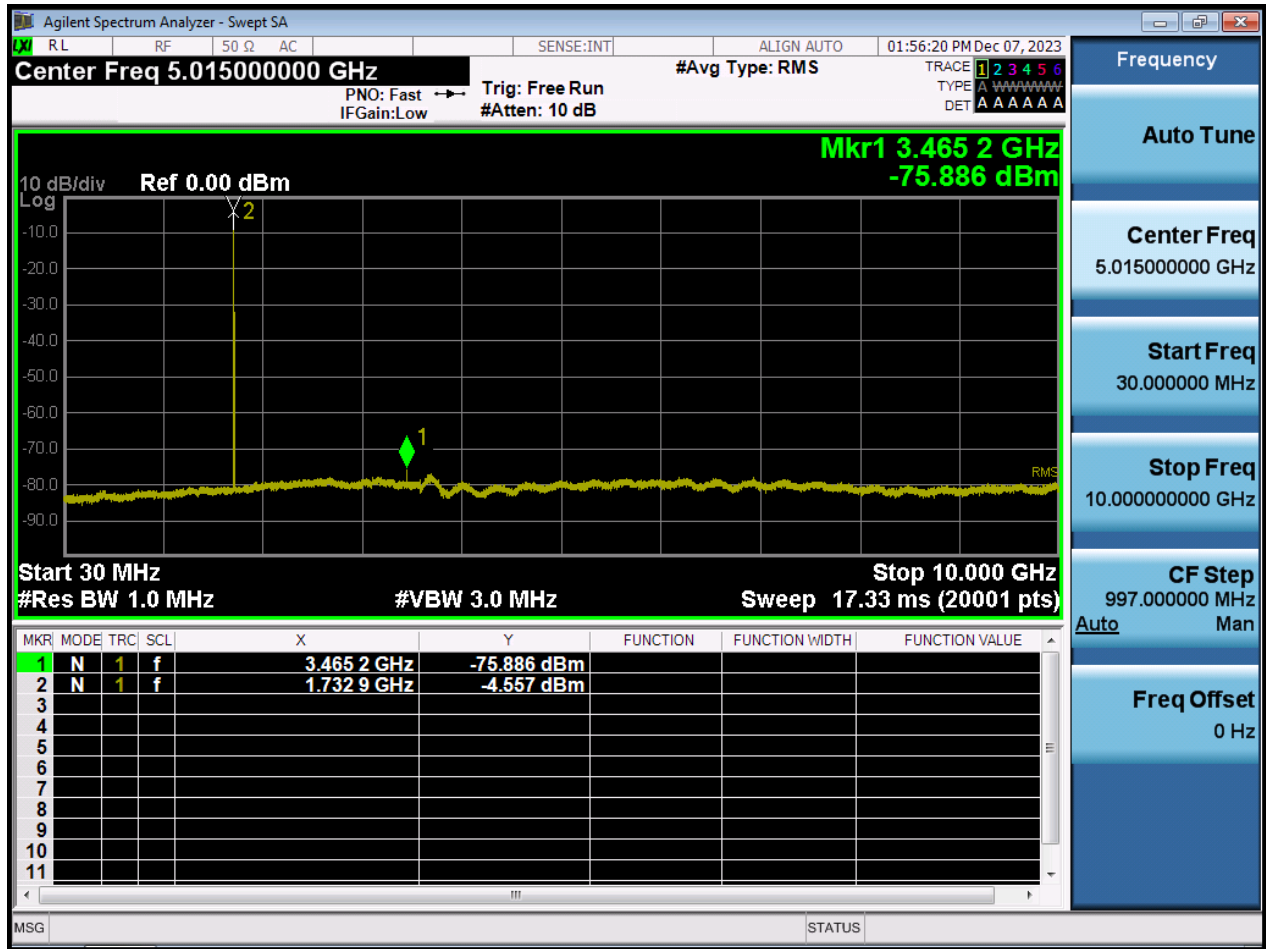


BW1.4 M\_CSE(30 M-10 G)\_Highest Channel\_QPSK\_1RB

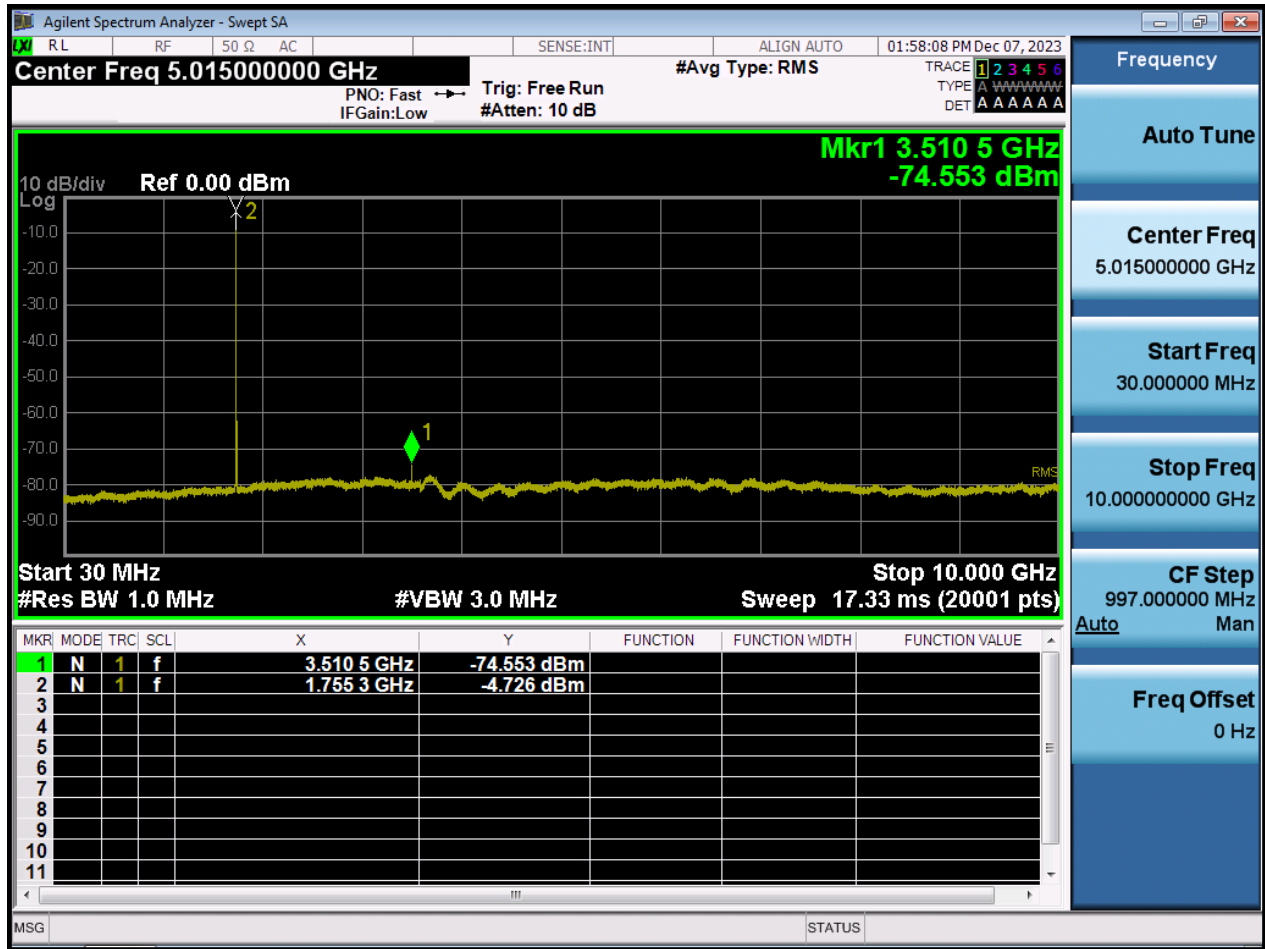

BW3 M\_CSE(30 M-10 G)\_Lowest Channel\_QPSK\_1RB

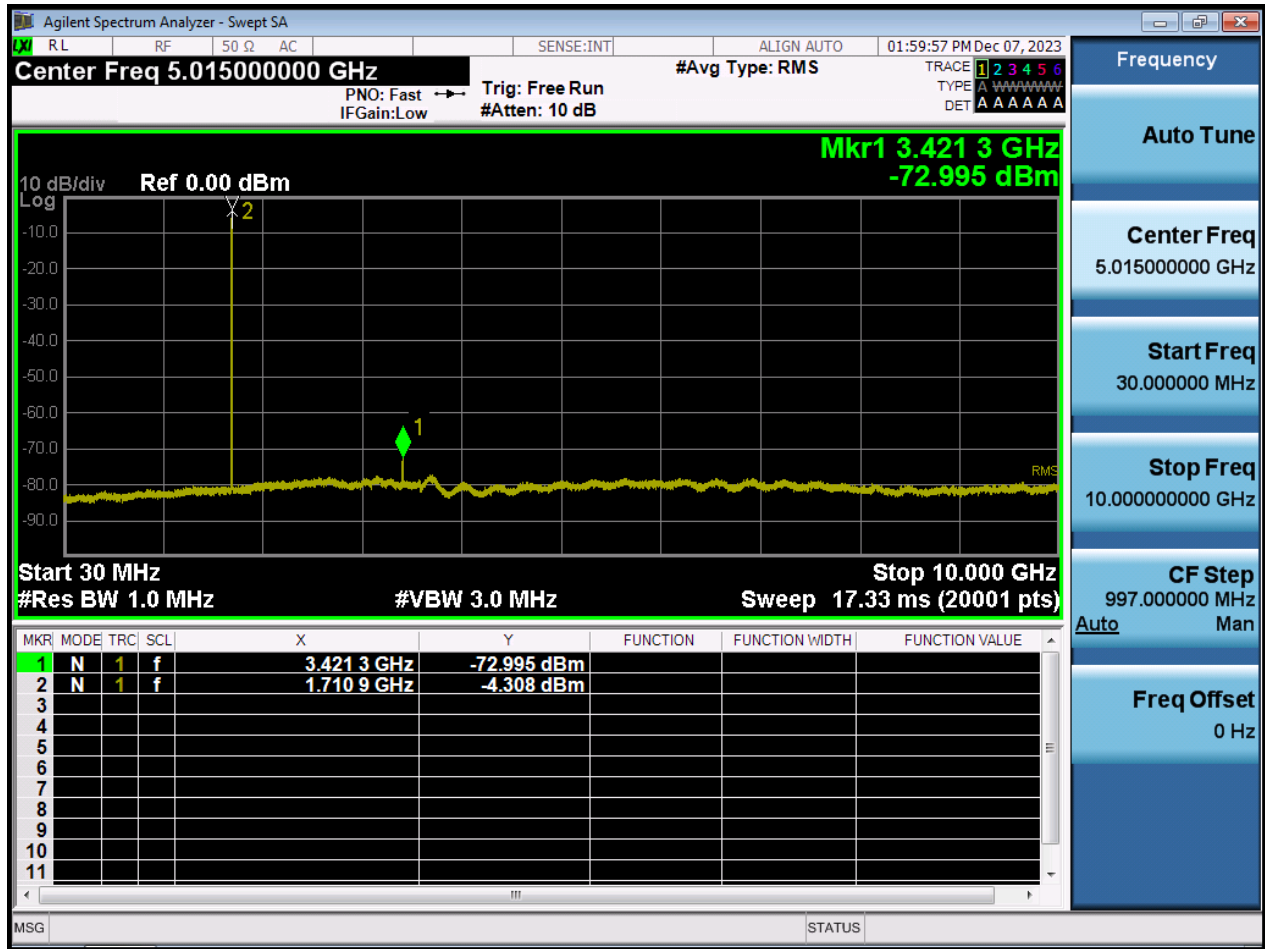

BW3 M\_CSE(30 M-10 G)\_Middle Channel\_QPSK\_1RB

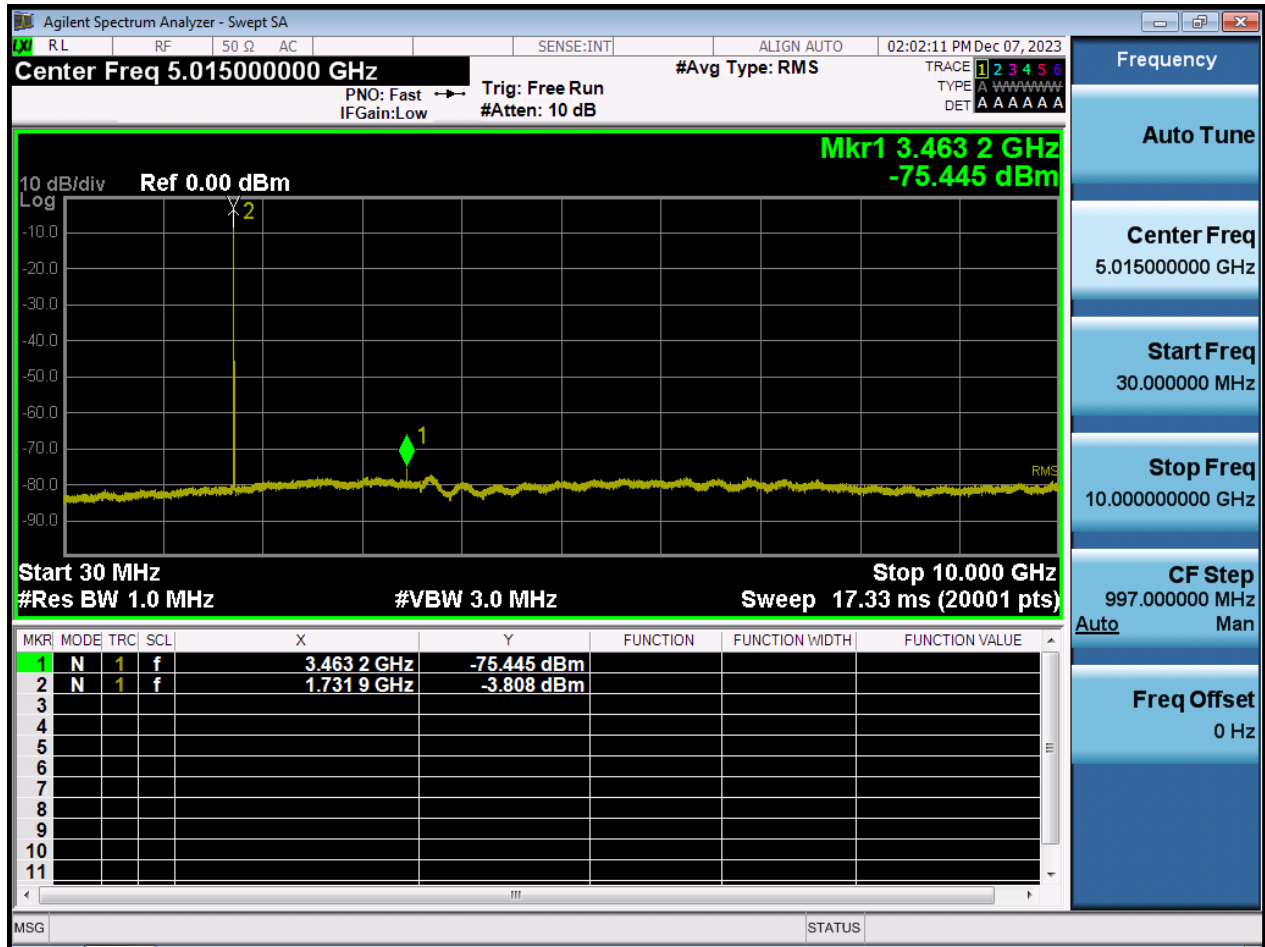

BW3 M\_CSE(30 M-10 G)\_Highest Channel\_QPSK\_1RB

