

# FCC 2G, 3G REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Address:**  
129, Samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Date of Issue:**  
January 03, 2019

**Location:**  
HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-RF-1812-FC045-R1

**FCC ID:** A3LSMM205F

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

**Model(s):** SM-M205F/DS  
**Additional Model(s):** SM-M205F, SM-M205G/DS  
**EUT Type:** Mobile Phone  
**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §22, §24, §2

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	249 KGXW	0.410	26.13
GSM850 EDGE			241 KG7W	0.091	19.61
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M16F9W	0.051	17.06

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	243 KGXW	0.509	27.07
GSM1900 EDGE			247 KG7W	0.064	18.03
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M16F9W	0.069	18.42

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

**HCT CO., LTD.** Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



**Report prepared by : Jae Ryang Do**  
Engineer of Telecommunication Testing Center



**Report approved by : Kwon Jeong**  
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1812-FC045	December 28, 2018	- First Approval Report
HCT-RF-1812-FC045-R1	January 03, 2019	- Revised on 5 page.

# Table of Contents

1. GENERAL INFORMATION .....	4
2. INTRODUCTION .....	5
2.1. DESCRIPTION OF EUT .....	5
2.2. MEASURING INSTRUMENT CALIBRATION .....	5
2.3. TEST FACILITY .....	5
3. DESCRIPTION OF TESTS.....	6
3.1 TEST PROCEDURE .....	6
3.2 RADIATED POWER .....	7
3.3 RADIATED SPURIOUS EMISSIONS .....	8
3.4 PEAK- TO- AVERAGE RATIO .....	9
3.5 OCCUPIED BANDWIDTH. ....	11
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	12
3.7 BAND EDGE .....	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	14
3.9 WORST CASE(CONDUCTED TEST) .....	15
3.10 WORST CASE(RADIATED TEST).....	16
4. LIST OF TEST EQUIPMENT .....	17
5. MEASUREMENT UNCERTAINTY .....	18
6. SUMMARY OF TEST RESULTS .....	19
7. SAMPLE CALCULATION .....	20
8. TEST DATA .....	22
8.1 EFFECTIVE RADIATED POWER .....	22
8.2 EQUIVALENT ISOTROPIC RADIATED POWER .....	23
8.3 RADIATED SPURIOUS EMISSIONS .....	24
8.4 PEAK-TO-AVERAGE RATIO .....	28
8.5 OCCUPIED BANDWIDTH .....	29
8.6 CONDUCTED SPURIOUS EMISSIONS .....	30
8.7 BAND EDGE .....	30
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	31
9. TEST PLOTS.....	39
10. ANNEX A_ TEST SETUP PHOTO .....	111

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMM205F
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§22, §24, §2
<b>EUT Type:</b>	Mobile Phone
<b>Model(s):</b>	SM-M205F/DS
<b>Additional Model(s):</b>	SM-M205F, SM-M205G/DS
<b>Tx Frequency:</b>	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900) 1 852.4 - 1 907.6 MHz (WCDMA1900)
<b>Rx Frequency:</b>	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900) 1 932.4 - 1 987.6 MHz (WCDMA1900)
<b>Date(s) of Tests:</b>	December 03, 2018 ~ December 26, 2018

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.  
It also supports IEEE 802.11 a/b/g/n/ac, Bluetooth, BTLE.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

### **3. DESCRIPTION OF TESTS**

#### **3.1 TEST PROCEDURE**

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

### 3.2 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $> 2 \times$  span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings


1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test dat



### 3.4 PEAK- TO- AVERAGE RATIO

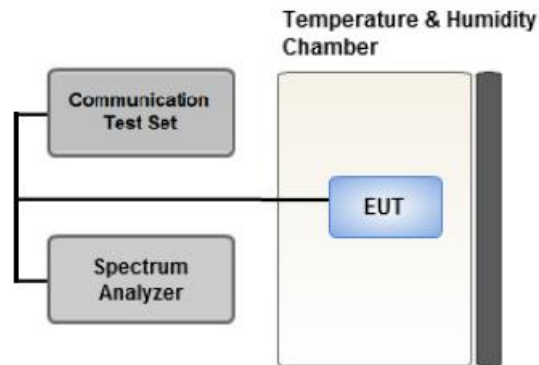

Test setup

#### ① CCDF Procedure for PAPR

##### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

**② Alternate Procedure for PAPR**

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

**Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

**Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times$  (number of points in sweep)  $\times$  (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6$  dB if the duty cycle is a constant 25%.

### 3.5 OCCUPIED BANDWIDTH.

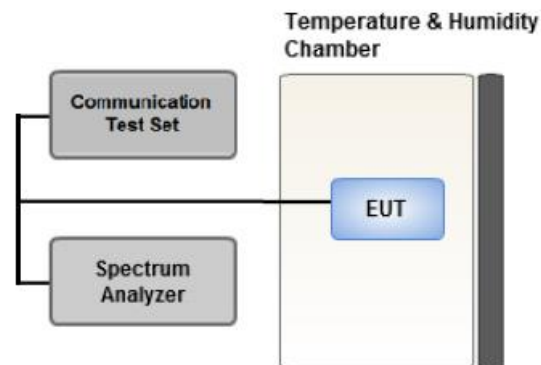

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

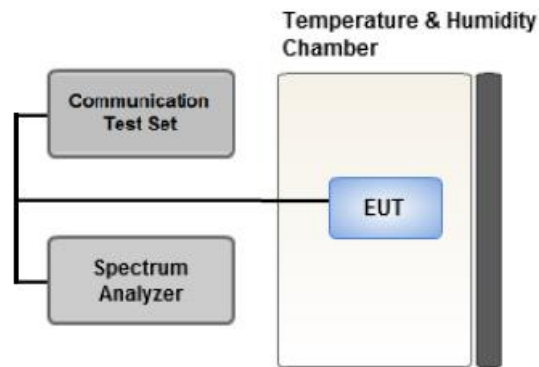

Test setup

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


#### Test Settings(GSM)

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep  $\geq 2 * \text{Span} / \text{RBW}$

#### Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq 2 * \text{Span} / \text{RBW}$

### 3.7 BAND EDGE

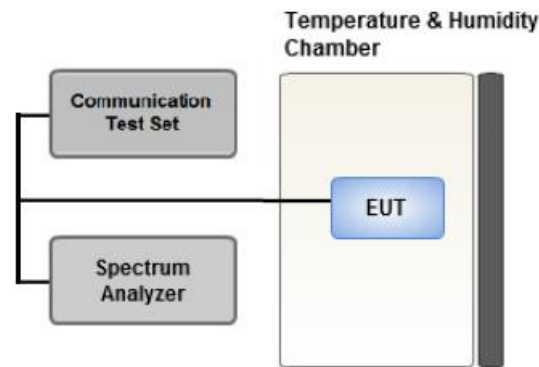

Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


#### Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

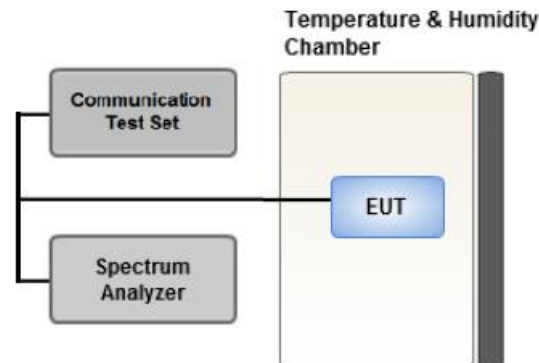

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.9 WORST CASE(CONDUCTED TEST)**

- All modes of operation were investigated and the worst case configuration results are reported.

[ Worst case ]

Test Description	Modulation	Test Channel
Occupied Bandwidth	2G : Voice & EDGE(1 TX Slot) 3G : QPSK	Low, Mid, High
	2G : EDGE(1 TX Slot)	Low, Mid, High
Band Edge	2G : Voice & EDGE(1 TX Slot) 3G : QPSK	Low, High
Spurious and Harmonic Emissions at Antenna Terminal	2G : Voice 3G : QPSK	Low, Mid, High

[ Test Channel ]

	UplinkChannel			
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B5)
Low	128	512	9262	4132
Mid	190	661	9400	4183
High	251	810	9538	4233

**Note:**

- SM-M205F/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-M205F/DS)

**3.10 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.

[ Worst case\_3G ]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK	12.2 kbps	WCDMA B2 : Z	Low, Mid, High
	(WCDMA)	RMC	WCDMA B5 : Y	
Radiated Spurious and Harmonic Emissions	QPSK	12.2 kbps	WCDMA B2 : Y	Low, Mid, High
	(WCDMA)	RMC	WCDMA B5 : Z	

[ Worst case\_2G ]

Test Description	Mod	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	Voice	GSM850 : Y GSM1900 : Z	Low, Mid, High
	EDGE(1 TX Slot)	GSM850 : Y GSM1900 : Z	GSM850 : Mid GSM1900 : High
Radiated Spurious and Harmonic Emissions	Voice	GSM850 : X GSM1900 : Y	Low, Mid, High

[ Test Channel ]

	UplinkChannel			
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B5)
Low	128	512	9262	4132
Mid	190	661	9400	4183
High	251	810	9538	4233

**Note:**

- SM-M205F/DS & additional models were tested and the worst case results are reported.  
(Worst case : SM-M205F/DS)



## 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/17/2018	Annual	04/17/2019
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/04/2018	Annual	04/04/2019
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/04/2018	Annual	04/04/2019
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	5001	06/07/2018	Annual	06/07/2019
Agilent	E3632A/DC Power Supply	KR75303243	05/09/2018	Annual	05/09/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/31/2017	Biennial	03/31/2019
Schwarzbeck	UHAP/ Dipole Antenna	558	03/31/2017	Biennial	03/31/2019
ESPEC	SU-642 / Chamber	93000718	08/07/2018	Annual	08/07/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/14/2018	Annual	09/14/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/04/2018	Annual	10/04/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/25/2017	Biennial	04/25/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	04/25/2017	Biennial	04/25/2019
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/08/2018	Annual	06/08/2019
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/21/2018	Annual	06/21/2019
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/22/2018	Annual	10/22/2019
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/27/2018	Annual	09/27/2019
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	04/06/2017	Biennial	04/06/2019
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/19/2018	Annual	07/19/2019
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	07/27/2018	Annual	07/27/2019
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

**Note:**

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## **5. MEASUREMENT UNCERTAINTY**

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

<b>Parameter</b>	<b>Expanded Uncertainty (<math>\pm</math>dB)</b>
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a), §24.238(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<b><u>See Note1</u></b>
Peak- to- Average Ratio	§24.232(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 22.355	< 2.5 ppm	PASS
	§24.235	Emission must remain in band	PASS

**Note:**

1. See SAR Report

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Equivalent Isotropic Radiated Power	§24.232(c)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

#### ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

#### EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### 16QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### 64QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
GSM850	128	824.2	-25.79	35.49	-10.27	0.86	V	< 7.00	0.273	24.36
	190	836.6	-25.09	37.21	-10.21	0.87	V		0.410	26.13
	251	848.8	-25.98	36.49	-10.16	0.87	V		0.352	25.46
EDGE	190	836.6	-31.61	30.69	-10.21	0.87	V		0.091	19.61

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA850	4132	826.4	-33.45	27.96	-10.26	0.86	H	< 7.00	0.048	16.84
	4183	836.6	-34.16	28.14	-10.21	0.87	H		0.051	17.06
	4233	846.6	-35.08	27.26	-10.17	0.87	H		0.042	16.22

**8.2 EQUIVALENT ISOTROPIC RADIATED POWER**

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
GSM1900	512	1850.2	-13.90	18.14	10.27	1.34	V	< 2.00	0.509	27.07
	661	1880.0	-14.52	17.61	10.29	1.36	V		0.451	26.54
	810	1909.8	-15.91	16.62	10.31	1.37	V		0.360	25.56
EDGE	810	1909.8	-22.94	9.10	10.27	1.34	V		0.064	18.03

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1900	9262	1852.4	-24.07	7.97	10.27	1.34	H	< 2.00	0.049	16.90
	9400	1880.0	-23.58	8.55	10.29	1.36	H		0.056	17.48
	9538	1907.6	-23.05	9.48	10.31	1.37	H		0.069	18.42

### 8.3 RADIATED SPURIOUS EMISSIONS

- MEASURED OUTPUT POWER: 26.13 dBm = 0.410 W
- MODULATION SIGNAL: GSM850
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10}(W) =$  39.13 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBd)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
128 (824.2)	1,648.40	-48.50	7.46	-57.39	1.27	H	-53.35	79.48
	2,472.60	-55.40	8.64	-61.34	1.58	V	-56.43	82.57
	3,296.80	-57.31	10.25	-63.30	1.86	V	-57.06	83.20
190 (836.6)	1,673.20	-48.67	7.53	-57.66	1.28	H	-53.56	79.69
	2,509.80	-56.64	8.83	-62.96	1.62	H	-57.90	84.03
	3,346.40	-57.54	10.51	-63.86	1.91	V	-57.41	83.54
251 (848.8)	1,697.60	-51.62	7.74	-60.62	1.29	H	-56.32	82.45
	2,546.40	-55.68	8.86	-61.71	1.62	H	-56.62	82.75
	3,395.20	-57.63	10.57	-63.77	1.95	V	-57.30	83.43



- MEASURED OUTPUT POWER: 27.07 dBm = 0.509 W
- MODULATION SIGNAL: GSM1900
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10}(W) =$  40.07 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
512 (1850.2)	3,700.40	-42.48	12.51	-49.28	1.98	H	-38.75	65.82
	5,550.60	-51.75	13.62	-53.03	2.72	V	-42.13	69.20
	7,400.80	-57.51	11.50	-52.50	2.92	V	-43.92	70.99
661 (1880.0)	3,760.00	-40.41	12.40	-46.85	2.00	V	-36.45	63.52
	5,640.00	-48.26	13.78	-49.09	2.70	H	-38.01	65.08
	7,520.00	-55.31	11.57	-50.10	2.93	V	-41.46	68.53
810 (1909.8)	3,819.60	-38.65	12.52	-44.89	2.05	V	-34.42	61.49
	5,729.40	-44.89	13.69	-44.84	2.72	V	-33.87	60.94
	7,639.20	-55.56	11.99	-50.76	2.93	V	-41.70	68.77

- MEASURED OUTPUT POWER: 17.06 dBm = 0.051 W
- MODULATION SIGNAL: WCDMA850
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10}(W) =$  30.06 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBd)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
4,132 (826.4)	1,652.80	-55.29	7.46	-64.18	1.27	H	-60.14	77.20
	2,479.20	-47.14	8.71	-53.51	1.60	H	-48.55	65.61
	3,305.60	-56.69	10.32	-62.72	1.87	V	-56.42	73.48
4,183 (836.6)	1,673.20	-57.04	7.53	-66.03	1.28	H	-61.93	78.99
	2,509.80	-44.21	8.83	-50.53	1.62	V	-45.47	62.53
	3,346.40	-57.16	10.51	-63.48	1.91	H	-57.03	74.09
4,233 (846.6)	1,693.20	-57.43	7.67	-66.46	1.28	V	-62.22	79.29
	2,539.80	-41.87	8.85	-47.65	1.61	H	-42.56	59.62
	3,386.40	-57.39	10.56	-63.67	1.93	V	-57.19	74.25

- MEASURED OUTPUT POWER: 18.42 dBm = 0.069 W
- MODULATION SIGNAL: WCDMA1900
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10}(W) =$  31.42 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
9262 (1852.4)	3,704.80	-53.59	12.50	-60.22	1.99	H	-49.71	68.13
	5,557.20	-57.10	13.64	-58.34	2.71	H	-47.41	65.83
	7,409.60	-57.99	11.50	-52.70	2.93	H	-44.13	62.55
9400 (1880.0)	3,760.00	-53.10	12.40	-59.54	2.00	V	-49.14	67.56
	5,640.00	-56.04	13.78	-56.87	2.70	V	-45.79	64.21
	7,520.00	-57.83	11.57	-52.62	2.93	V	-43.98	62.40
9538 (1907.6)	3,815.20	-52.33	12.52	-58.70	2.06	H	-48.23	66.65
	5,722.80	-57.71	13.70	-57.40	2.72	V	-46.42	64.84
	7,630.40	-57.63	11.95	-52.82	2.98	V	-43.85	62.26

**8.4 PEAK-TO-AVERAGE RATIO**

Band	Ch.	Measured P <sub>Pk</sub> (dBm)	Measured P <sub>Avg</sub> (dBm)	P <sub>Avg</sub> (Duty Cycle)			P.A.R. = P <sub>Pk</sub> - P <sub>Avg</sub> (dB)	Limit (dB)	Pass / Fail
				Tx <sub>Total</sub> (ms)	Tx <sub>On</sub> (ms)	Factor (dB)			
GSM1900	661	30.688	20.82	4.6160	0.5475	9.26	0.61	13	Pass
GSM1900 EDGE	661	29.477	16.43	4.616	0.5475	9.26	3.79		
WCDMA1900	9400	CCDF Procedure					3.25		

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 54 ~ 60.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)}$  (P<sub>Avg</sub> = Average Power + Duty cycle Factor)

Duty cycle Factor =  $10 \log (1/x)$ ,  $x = Tx_{On} / Tx_{Total}$

### 8.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	243.93
	190	836.60	249.18
	251	848.80	248.60
GSM850 EDGE	128	824.20	239.01
	190	836.60	240.96
	251	848.80	236.89
GSM1900	512	1,850.20	243.28
	661	1,880.00	240.87
	810	1,909.80	242.65
GSM1900 EDGE	512	1,850.20	247.39
	661	1,880.00	240.06
	810	1,909.80	246.05
WCDMA850	4132	826.40	4.1333
	4183	836.60	4.1452
	4233	846.60	4.1562
WCDMA1900	9262	1852.40	4.1425
	9400	1880.00	4.1354
	9538	1907.60	4.1633

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 40 ~ 53.

**8.6 CONDUCTED SPURIOUS EMISSIONS**

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	(dBm)
GSM850	128	5.5808	28.591	-57.17	-28.577	-13.00
	190	3.6930	27.976	-56.30	-28.320	
	251	3.7005	27.976	-56.62	-28.647	
GSM1900	512	16.52691	29.489	-53.511	-24.022	
	661	19.41499	29.489	-52.764	-23.275	
	810	18.99122	29.489	-52.561	-23.072	
WCDMA850	4132	2.4821	27.976	-77.208	-49.232	
	4183	3.7074	27.976	-76.672	-48.696	
	4233	2.5375	27.976	-75.905	-47.929	
WCDMA1900	9262	3.7039	27.976	-67.808	-39.832	
	9400	3.7593	27.976	-70.839	-42.863	
	9538	18.9487	29.489	-73.142	-43.653	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 93 ~ 110.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


**8.7 BAND EDGE**

- Plots of the EUT's Band Edge are shown Page 61 ~ 92.

**8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- MODE: GSM850
- OPERATING FREQUENCY: 836,600,000 Hz
- CHANNEL: 190
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	836 599 986	0.0	0.000 000	0.0000
100%		-30	836 599 972	-14.8	-0.000 002	-0.0176
100%		-20	836 599 972	-14.3	-0.000 002	-0.0171
100%		-10	836 599 972	-14.6	-0.000 002	-0.0175
100%		0	836 599 971	-14.9	-0.000 002	-0.0178
100%		+10	836 599 972	-14.2	-0.000 002	-0.0170
100%		+30	836 599 971	-15.6	-0.000 002	-0.0187
100%		+40	836 599 972	-14.3	-0.000 002	-0.0171
100%		+50	836 599 972	-14.4	-0.000 002	-0.0173
Batt. Endpoint		3.400	+20	836 599 972	-14.7	-0.000 002

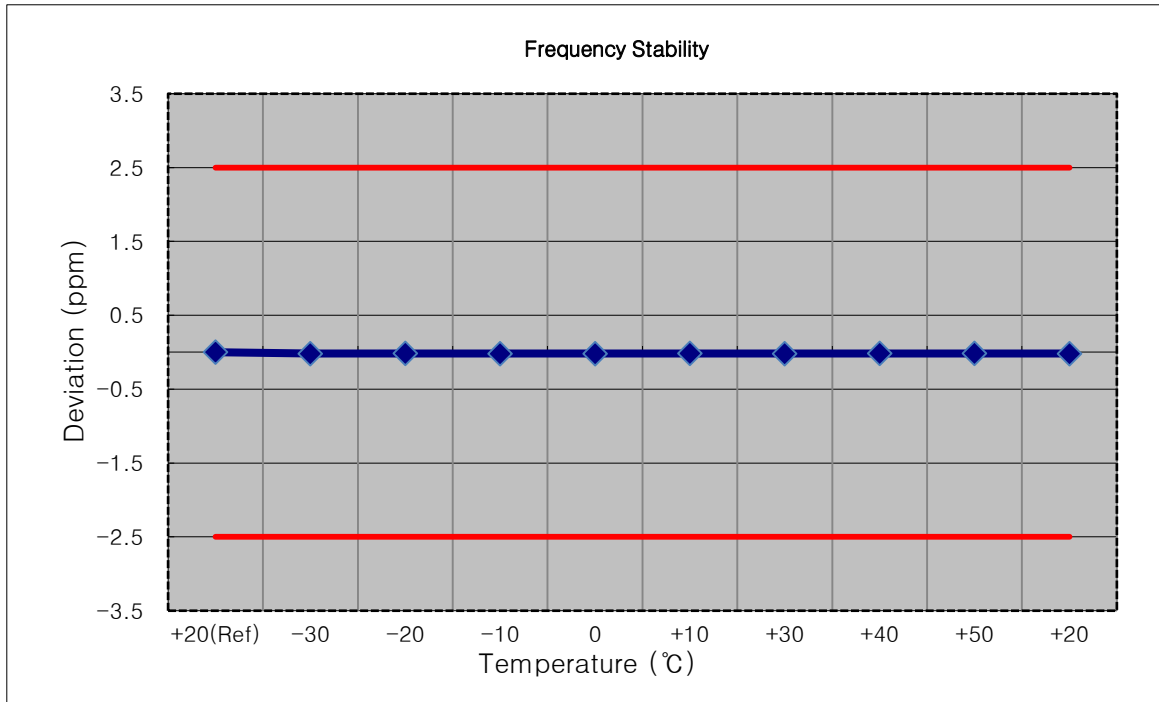

- Mode: GSM1900
- OPERATING FREQUENCY: 1850,200,000 Hz
- CHANNEL: 512
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1850 199 990	0.0	0.000 000	0.0000
100%		-30	1850 199 980	-10.3	-0.000 001	-0.0056
100%		-20	1850 199 981	-9.1	0.000 000	-0.0049
100%		-10	1850 199 981	-8.8	0.000 000	-0.0048
100%		0	1850 199 981	-8.9	0.000 000	-0.0048
100%		+10	1850 199 981	-9.0	0.000 000	-0.0049
100%		+30	1850 199 980	-9.8	-0.000 001	-0.0053
100%		+40	1850 199 981	-9.2	0.000 000	-0.0049
100%		+50	1850 199 980	-9.7	-0.000 001	-0.0052
Batt. Endpoint	3.400	+20	1850 199 981	-8.7	0.000 000	-0.0047

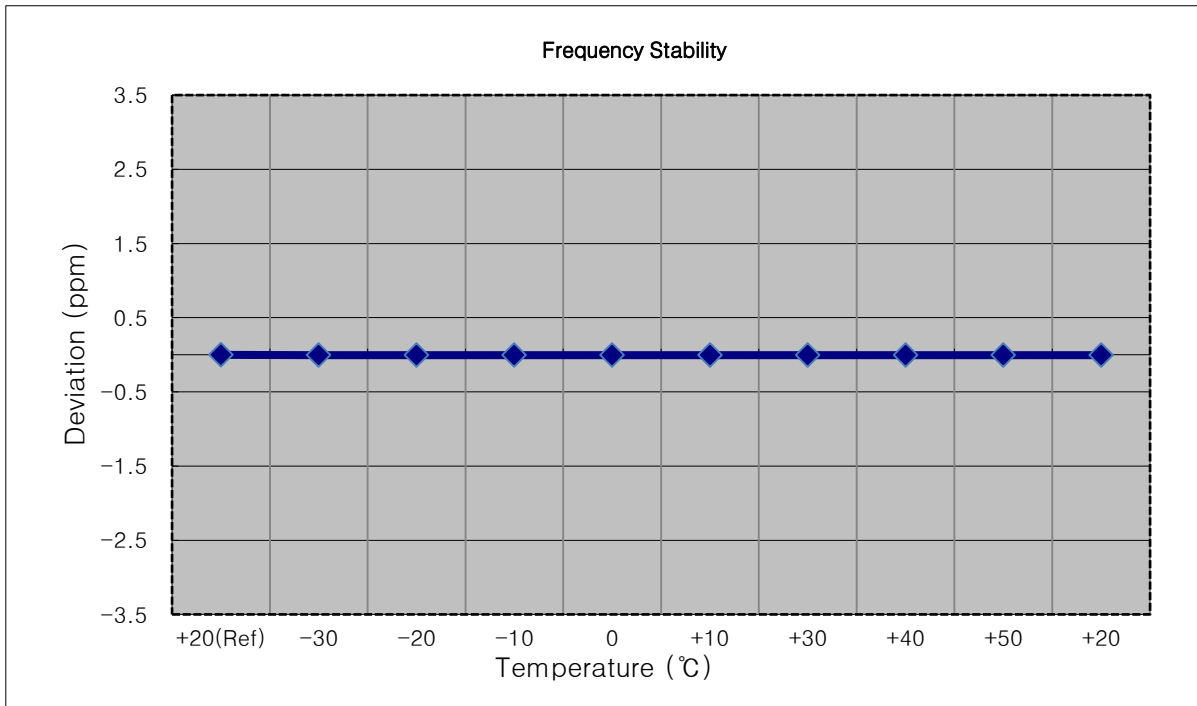




- Mode: GSM1900
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 661
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1879 999 992	0.0	0.000 000	0.000
100%		-30	1879 999 984	-7.9	0.000 000	-0.004
100%		-20	1879 999 985	-7.5	0.000 000	-0.004
100%		-10	1879 999 985	-7.5	0.000 000	-0.004
100%		0	1879 999 985	-7.0	0.000 000	-0.004
100%		+10	1879 999 985	-7.2	0.000 000	-0.004
100%		+30	1879 999 984	-8.3	0.000 000	-0.004
100%		+40	1879 999 985	-7.3	0.000 000	-0.004
100%		+50	1879 999 984	-8.1	0.000 000	-0.004
Batt. Endpoint	3.400	+20	1879 999 984	-8.4	0.000 000	-0.004

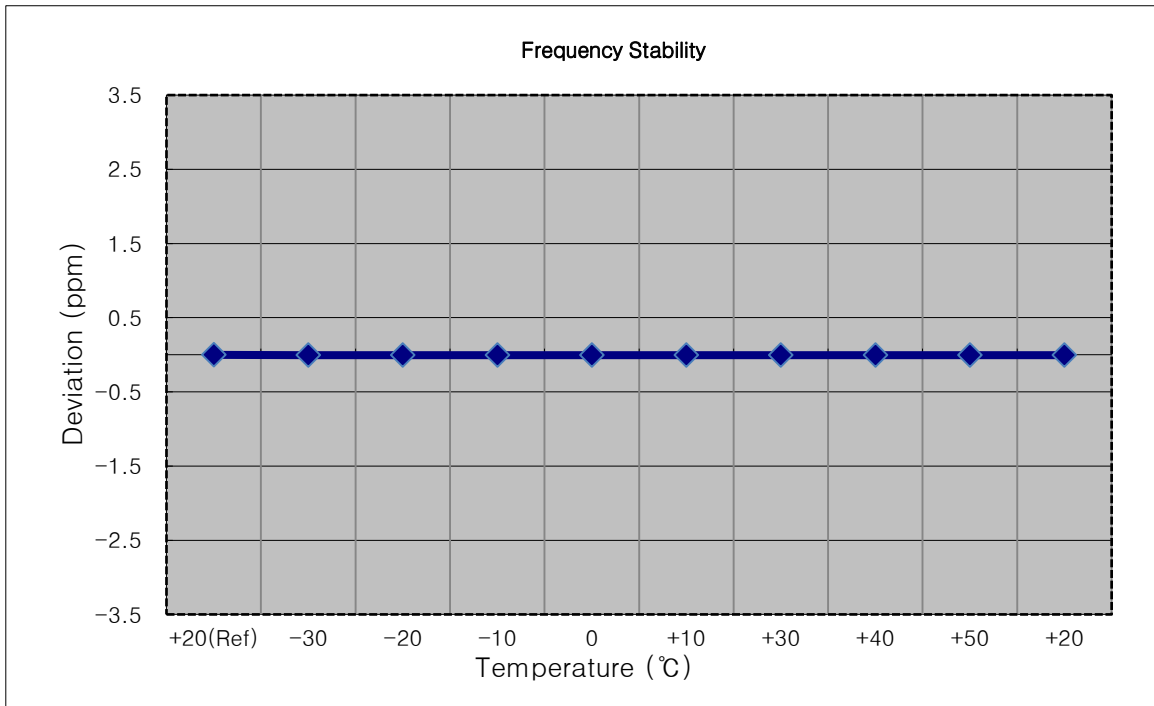


- Mode: GSM1900
- OPERATING FREQUENCY: 1909,800,000 Hz
- CHANNEL: 810
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1909 799 992	0.0	0.000 000	0.000
100%		-30	1909 799 986	-6.4	0.000 000	-0.003
100%		-20	1909 799 985	-7.4	0.000 000	-0.004
100%		-10	1909 799 986	-6.7	0.000 000	-0.004
100%		0	1909 799 985	-7.9	0.000 000	-0.004
100%		+10	1909 799 986	-6.9	0.000 000	-0.004
100%		+30	1909 799 985	-7.2	0.000 000	-0.004
100%		+40	1909 799 986	-6.8	0.000 000	-0.004
100%		+50	1909 799 985	-7.4	0.000 000	-0.004
Batt. Endpoint	3.400	+20	1909 799 984	-8.1	0.000 000	-0.004

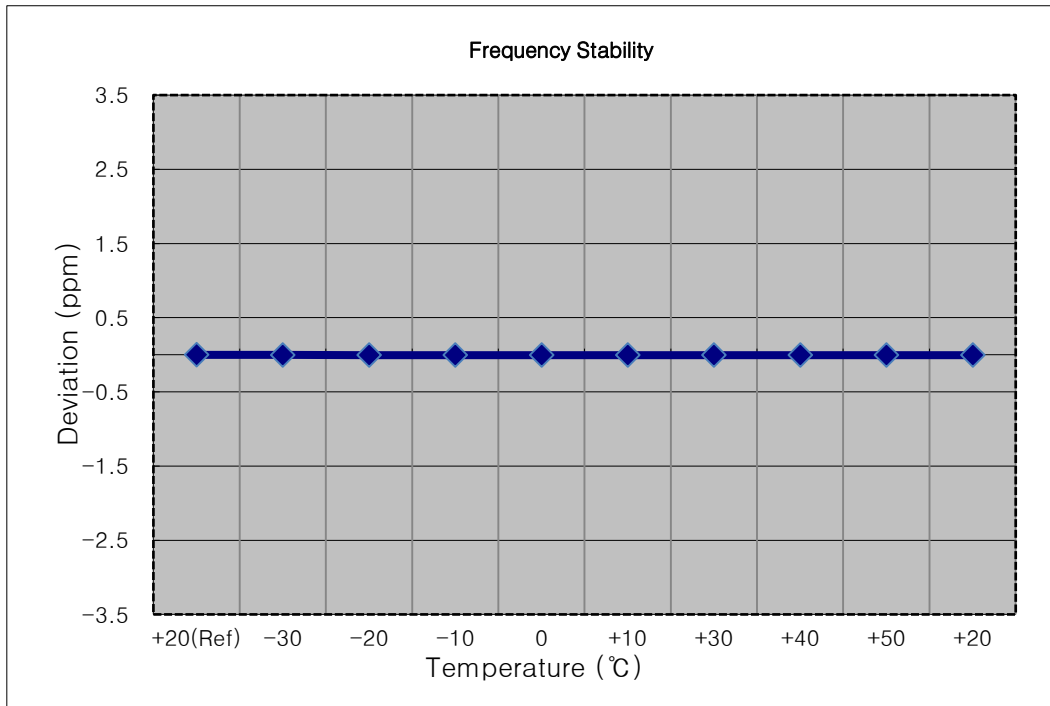


- Mode: WCDMA850
- OPERATING FREQUENCY: 836,600,000 Hz
- CHANNEL: 4183
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	836 600 001	0.0	0.000 000	0.0000
100%		-30	836 600 003	1.7	0.000 000	0.0021
100%		-20	836 600 002	1.3	0.000 000	0.0016
100%		-10	836 600 000	-1.1	0.000 000	-0.0013
100%		0	836 600 002	1.4	0.000 000	0.0017
100%		+10	836 600 002	1.4	0.000 000	0.0017
100%		+30	836 599 999	-1.7	0.000 000	-0.0020
100%		+40	836 600 002	1.3	0.000 000	0.0016
100%		+50	836 599 999	-1.7	0.000 000	-0.0021
Batt. Endpoint	3.400	+20	836 600 003	1.9	0.000 000	0.0022

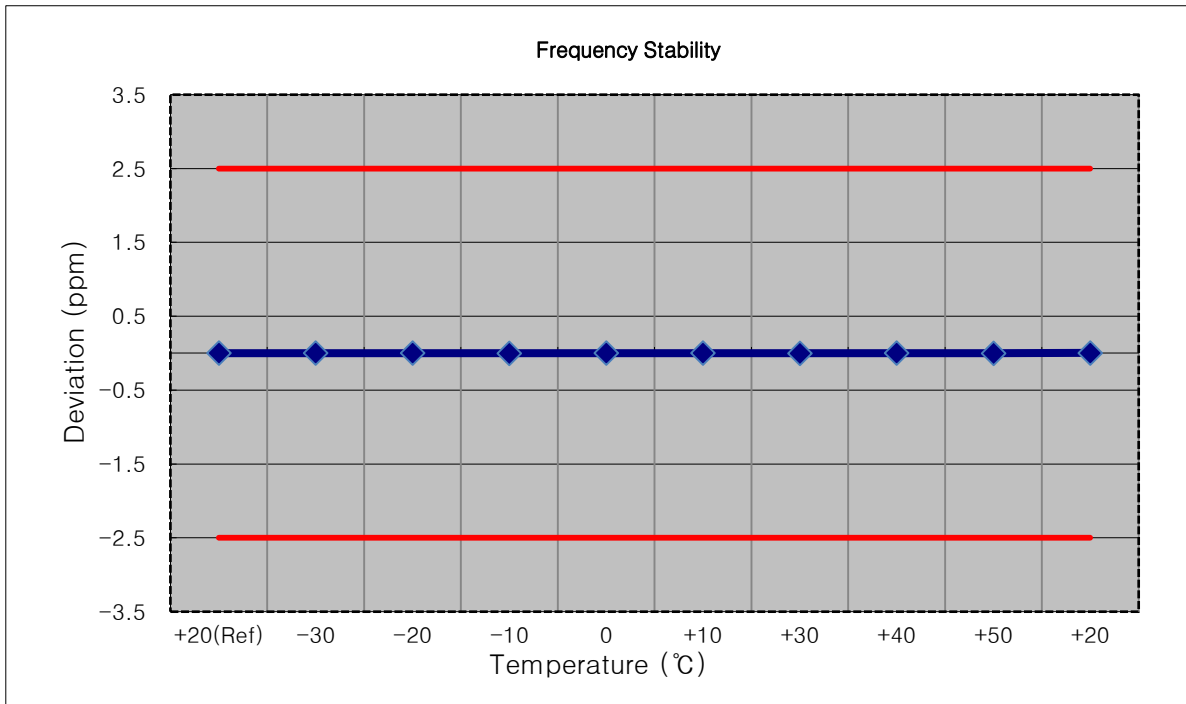


- Mode: WCDMA1900
- OPERATING FREQUENCY: 1,852,400,000 Hz
- CHANNEL: 9262
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1852 400 002	0.0	0.000 000	0.0000
100%		-30	1852 400 005	2.3	0.000 000	0.0013
100%		-20	1852 400 005	2.2	0.000 000	0.0012
100%		-10	1852 400 005	2.1	0.000 000	0.0011
100%		0	1852 400 005	2.2	0.000 000	0.0012
100%		+10	1852 400 005	2.1	0.000 000	0.0011
100%		+30	1852 400 005	2.0	0.000 000	0.0011
100%		+40	1852 400 005	2.5	0.000 000	0.0014
100%		+50	1852 400 005	2.4	0.000 000	0.0013
Batt. Endpoint	3.400	+20	1852 400 005	2.8	0.000 000	0.0015

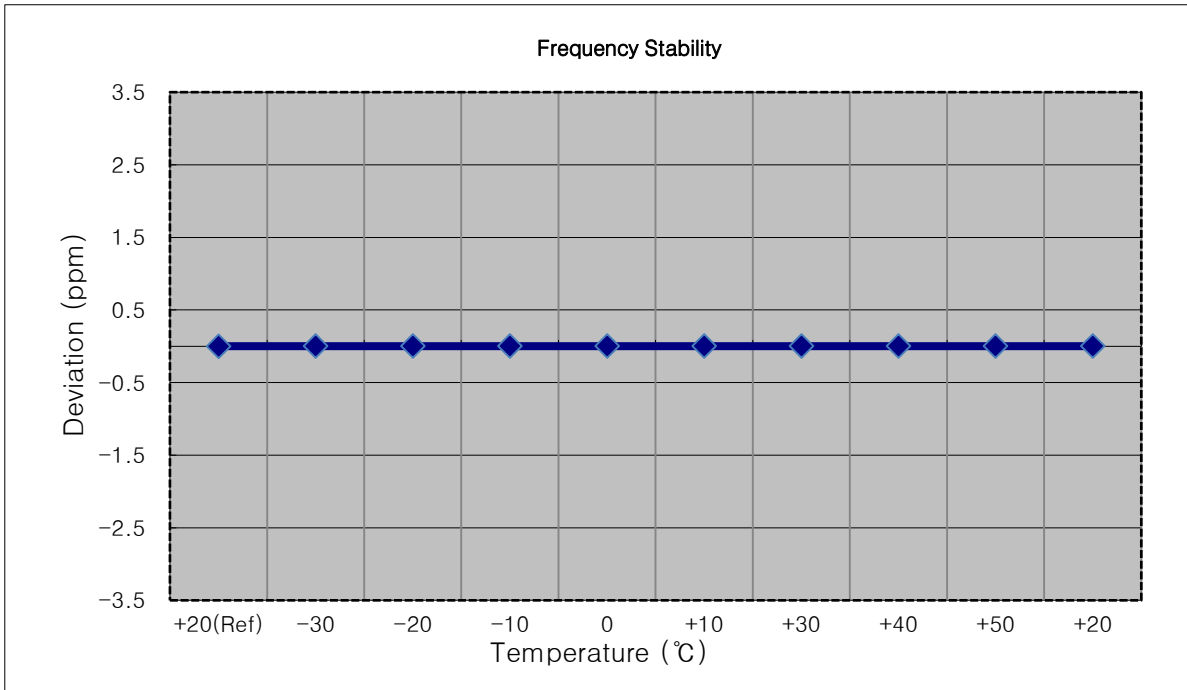


- Mode: WCDMA1900
- OPERATING FREQUENCY: 1,880,000,000 Hz
- CHANNEL: 9400
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1879 999 997	0.0	0.000 000	0.0000
100%		-30	1879 999 995	-2.0	0.000 000	-0.0011
100%		-20	1879 999 994	-2.4	0.000 000	-0.0013
100%		-10	1879 999 995	-2.1	0.000 000	-0.0011
100%		0	1879 999 995	-2.0	0.000 000	-0.0010
100%		+10	1879 999 995	-1.7	0.000 000	-0.0009
100%		+30	1879 999 992	-4.4	0.000 000	-0.0023
100%		+40	1879 999 999	1.7	0.000 000	0.0009
100%		+50	1879 999 995	-2.0	0.000 000	-0.0011
Batt. Endpoint	3.400	+20	1879 999 995	-1.9	0.000 000	-0.0010

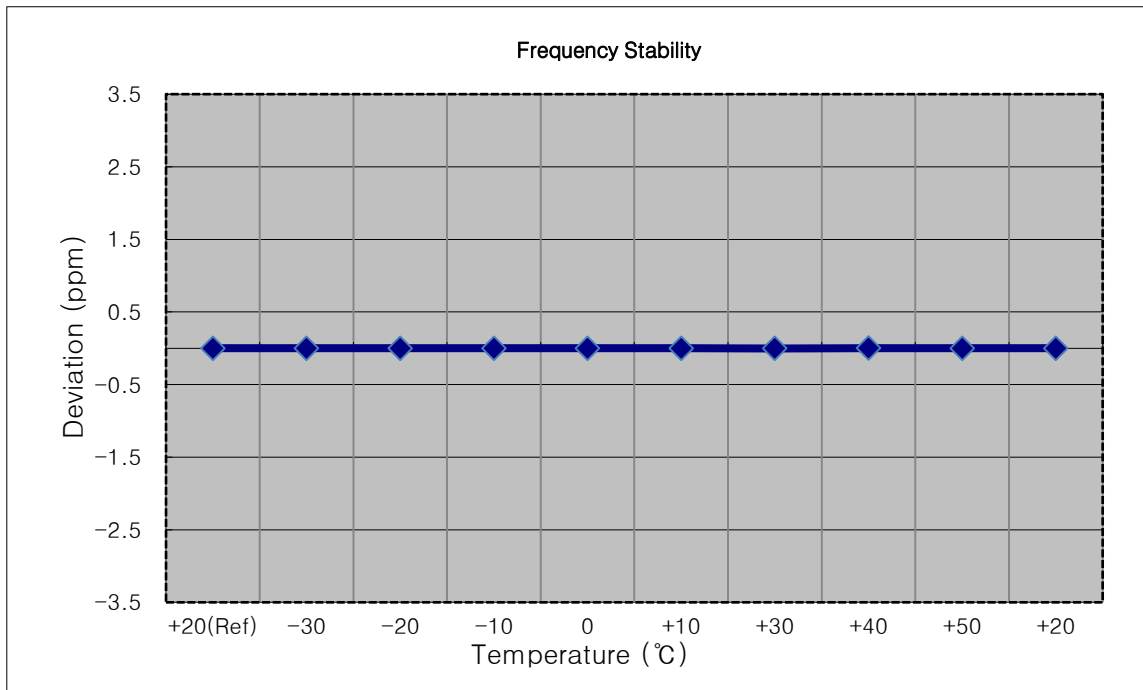


- Mode: WCDMA1900
- OPERATING FREQUENCY: 1,907,600,000 Hz
- CHANNEL: 9538
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1907 600 002	0.0	0.000 000	0.0000
100%		-30	1907 600 004	1.7	0.000 000	0.0009
100%		-20	1907 600 001	-1.4	0.000 000	-0.0007
100%		-10	1907 600 004	1.9	0.000 000	0.0010
100%		0	1907 600 001	-1.1	0.000 000	-0.0006
100%		+10	1907 600 000	-2.3	0.000 000	-0.0012
100%		+30	1907 600 000	-2.0	0.000 000	-0.0010
100%		+40	1907 600 003	1.2	0.000 000	0.0006
100%		+50	1907 600 004	2.2	0.000 000	0.0012
Batt. Endpoint	3.400	+20	1907 600 005	2.6	0.000 000	0.0013

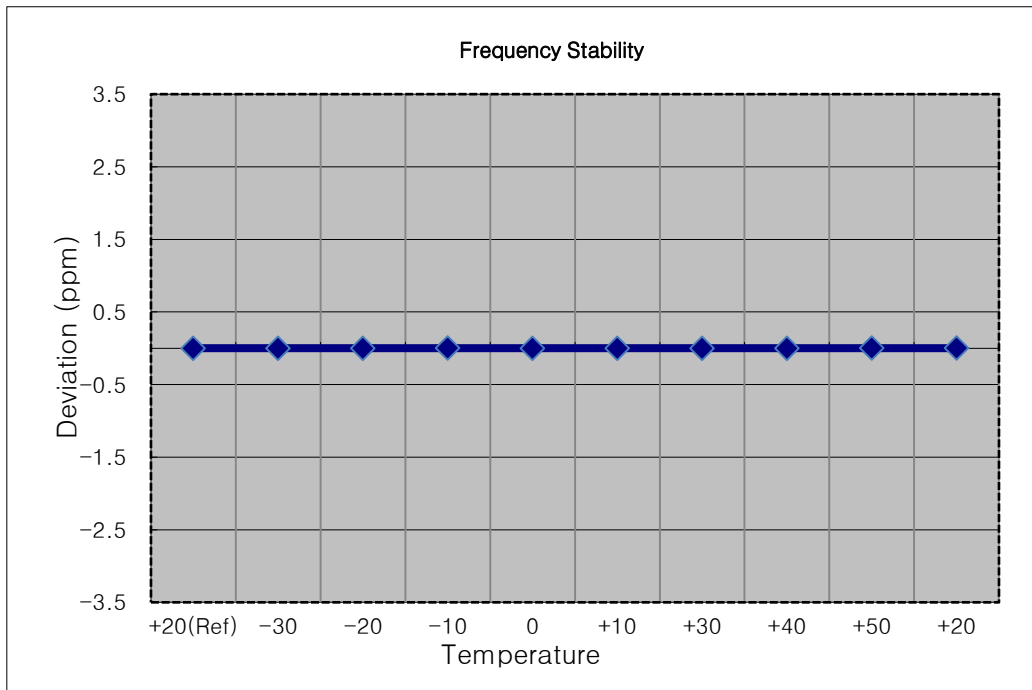


## **9. TEST PLOTS**

■ GSM850 MODE (128 CH.) Occupied Bandwidth

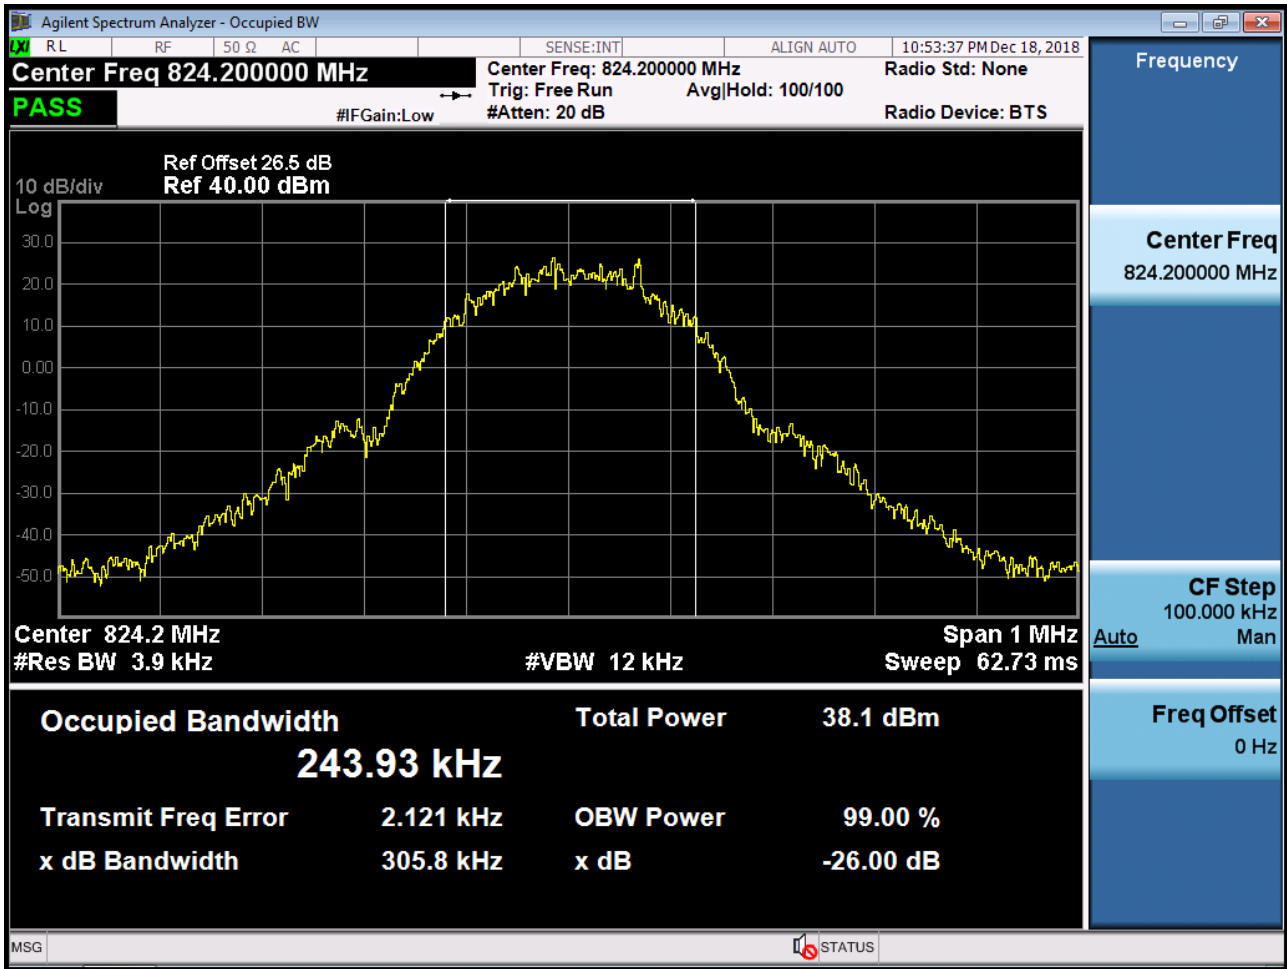





■ GSM850 MODE (190 CH.) Occupied Bandwidth

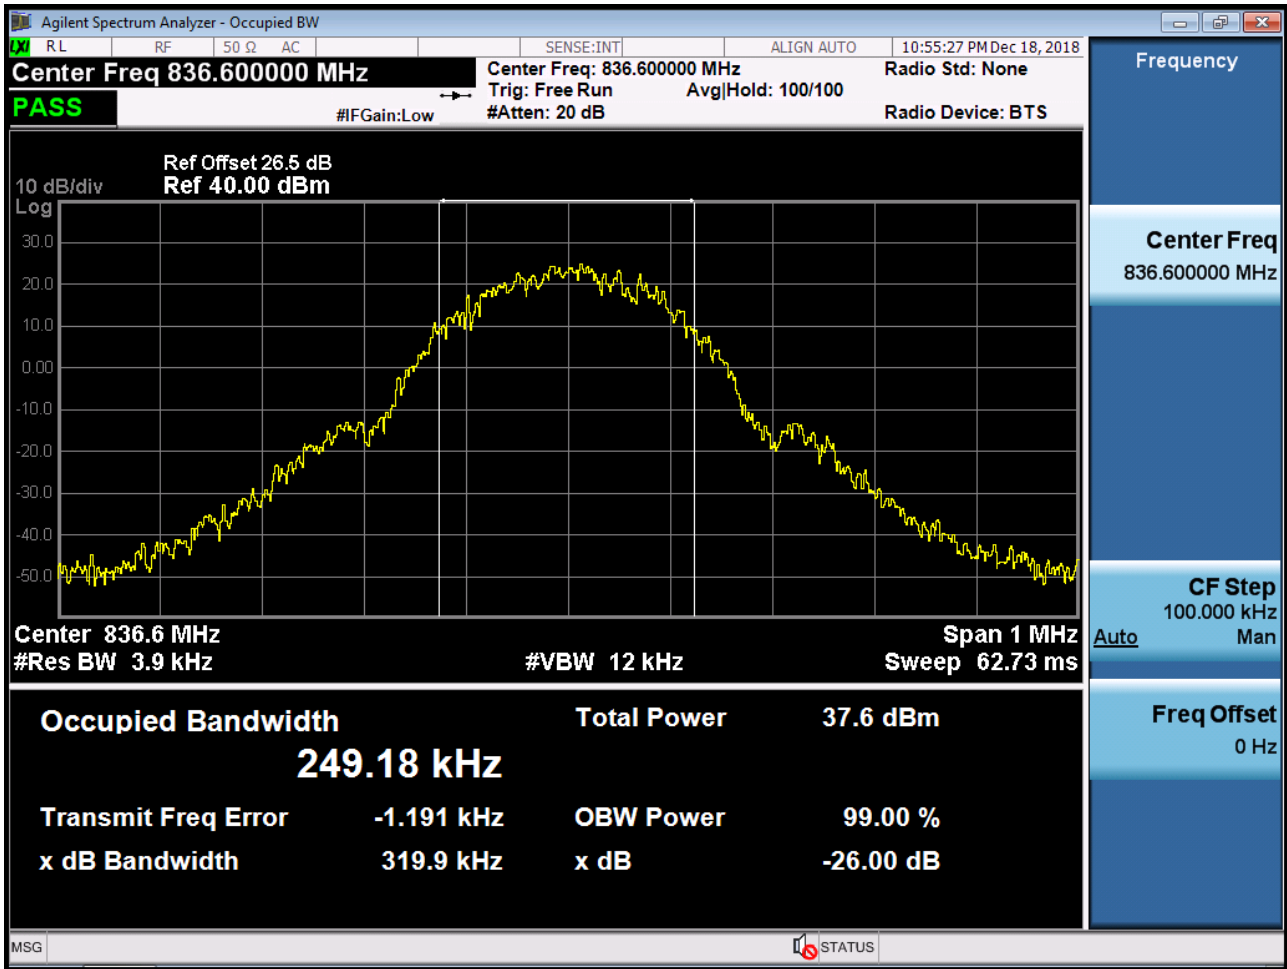


■ GSM850 MODE (251 CH.) Occupied Bandwidth

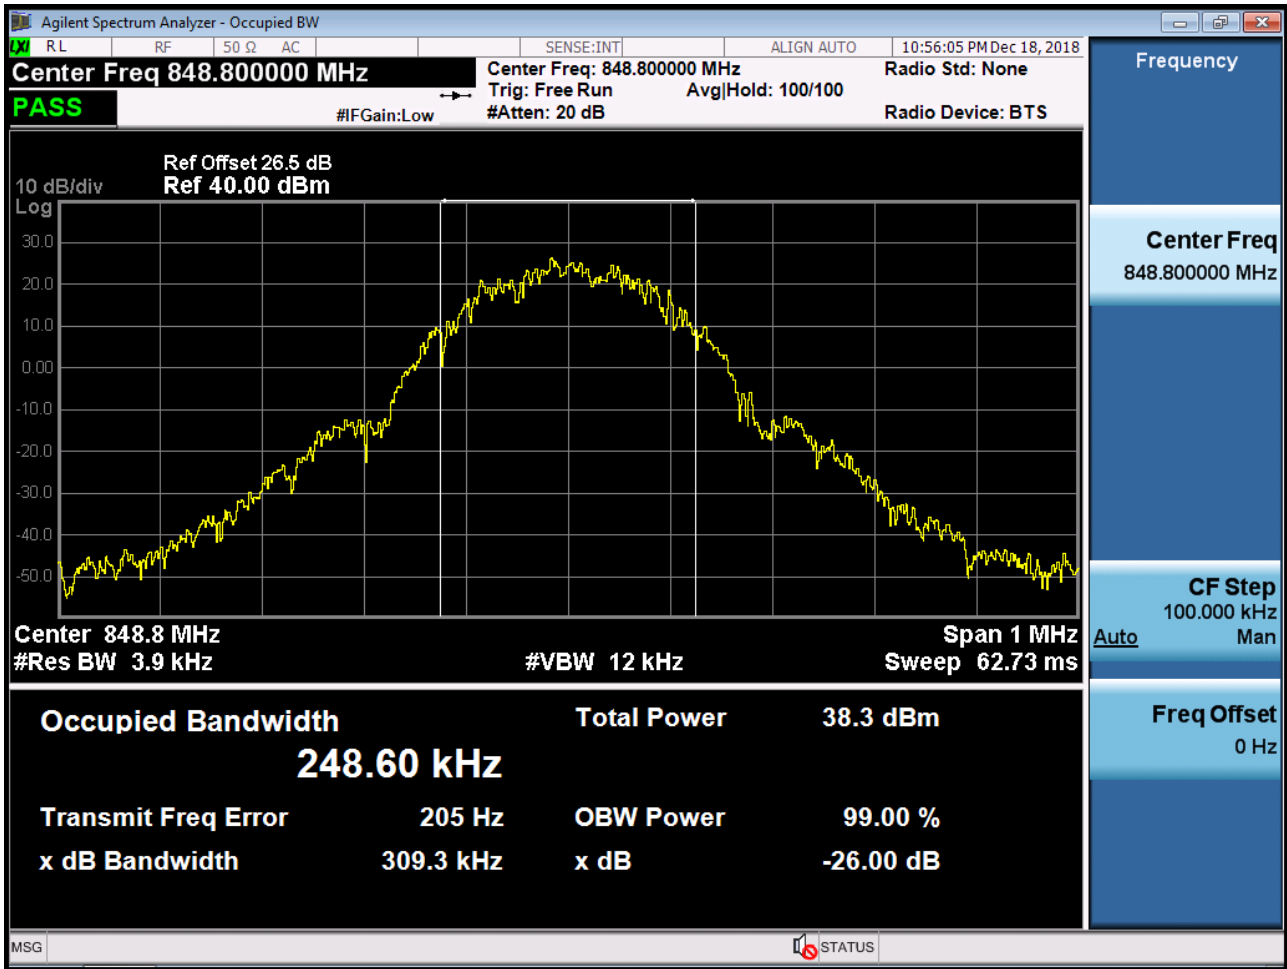


■ GSM850 EDGE (190 CH.) Occupied Bandwidth

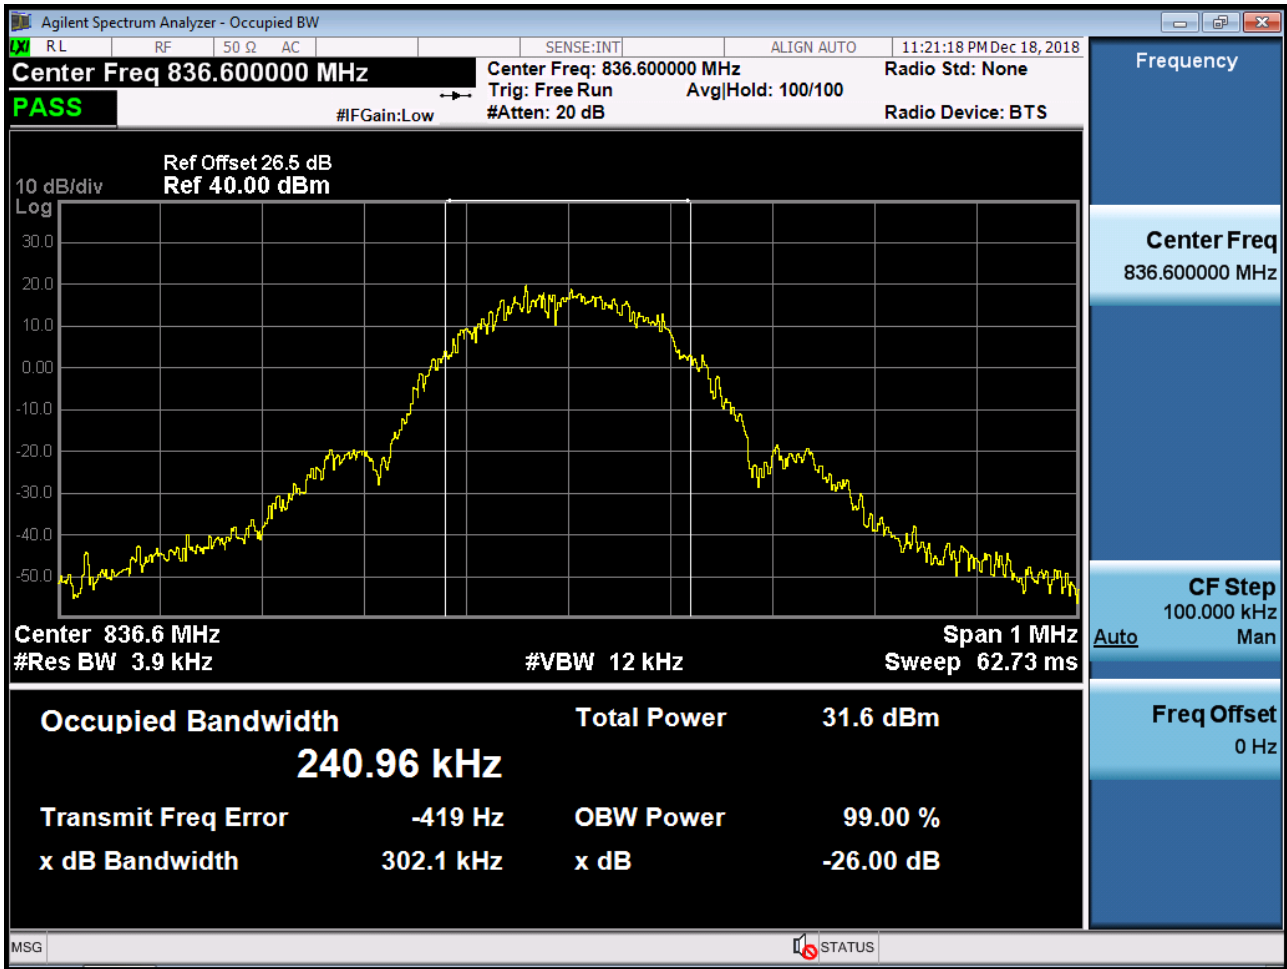


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

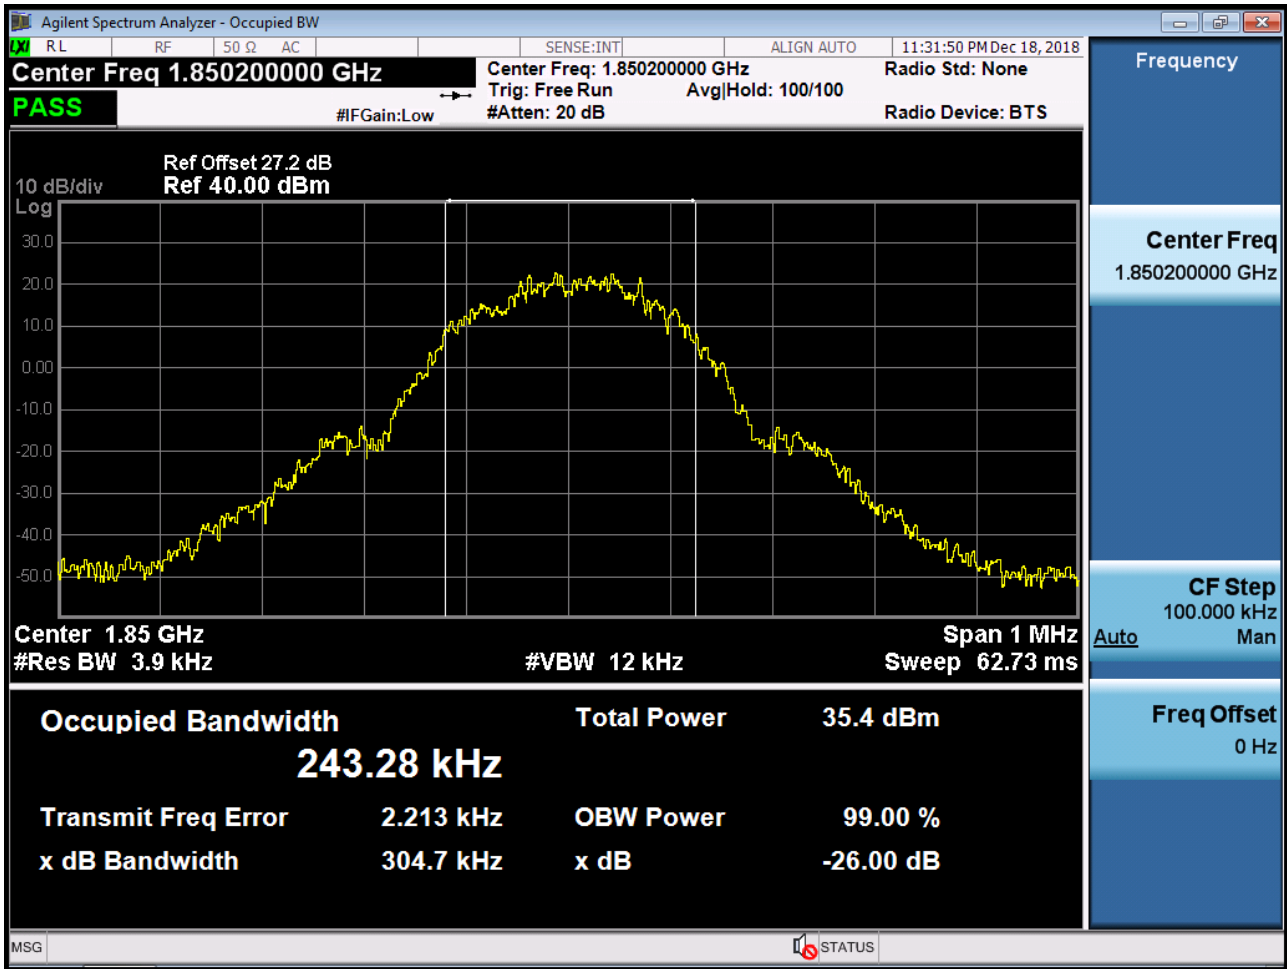


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

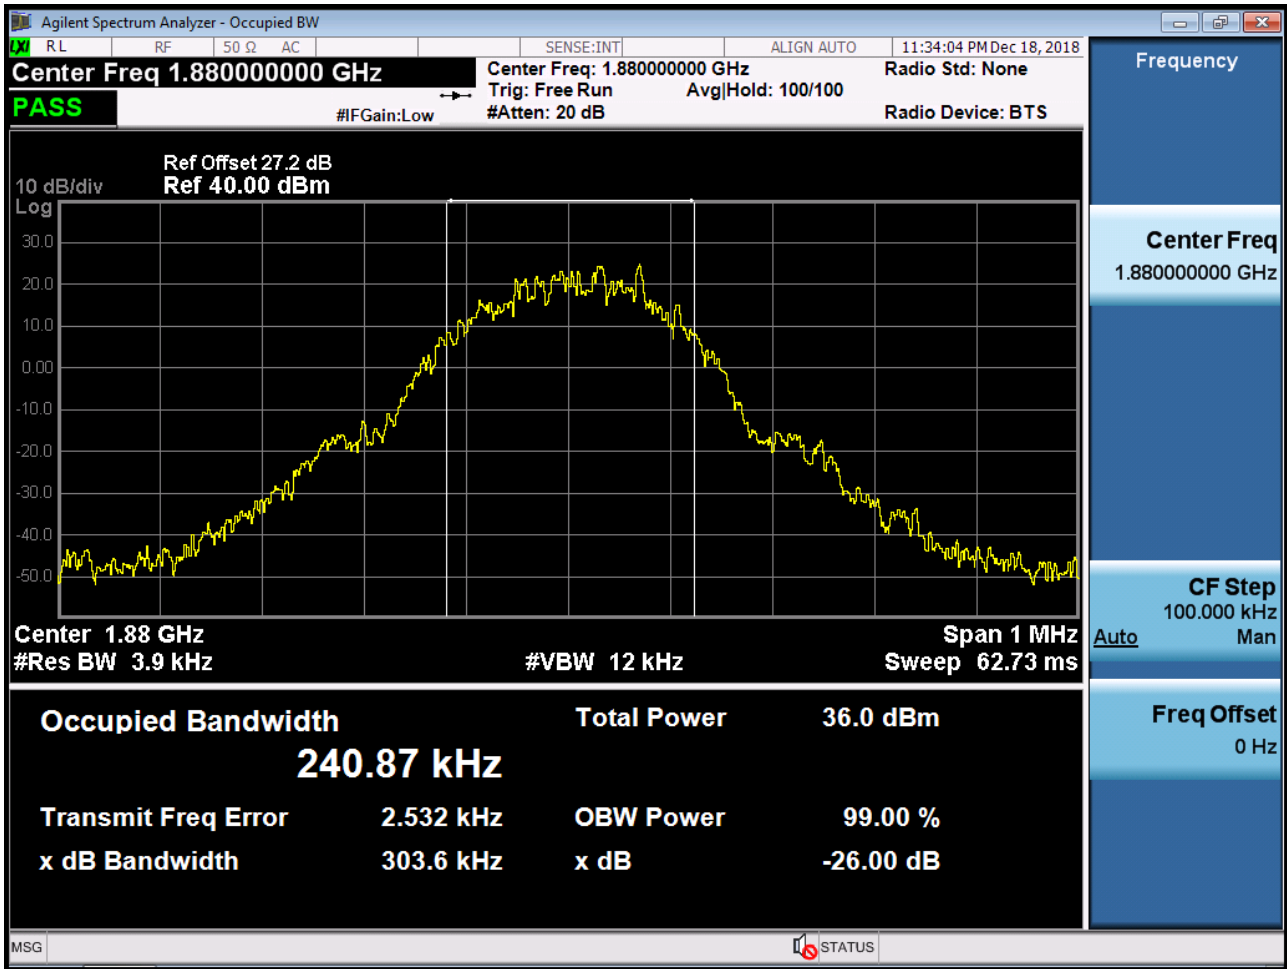


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

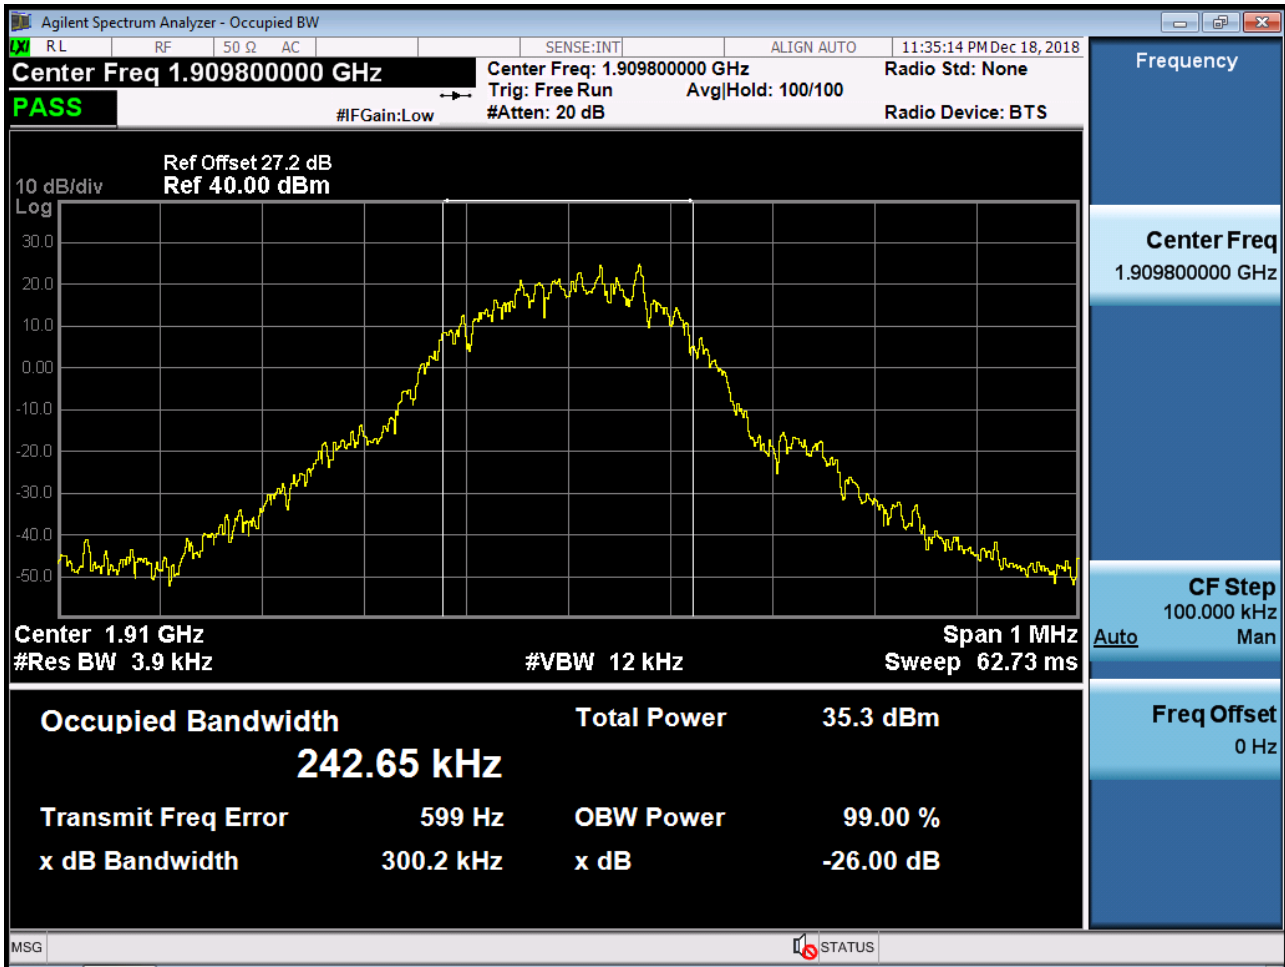

■ GSM1900 EDGE (512 CH.) Occupied Bandwidth

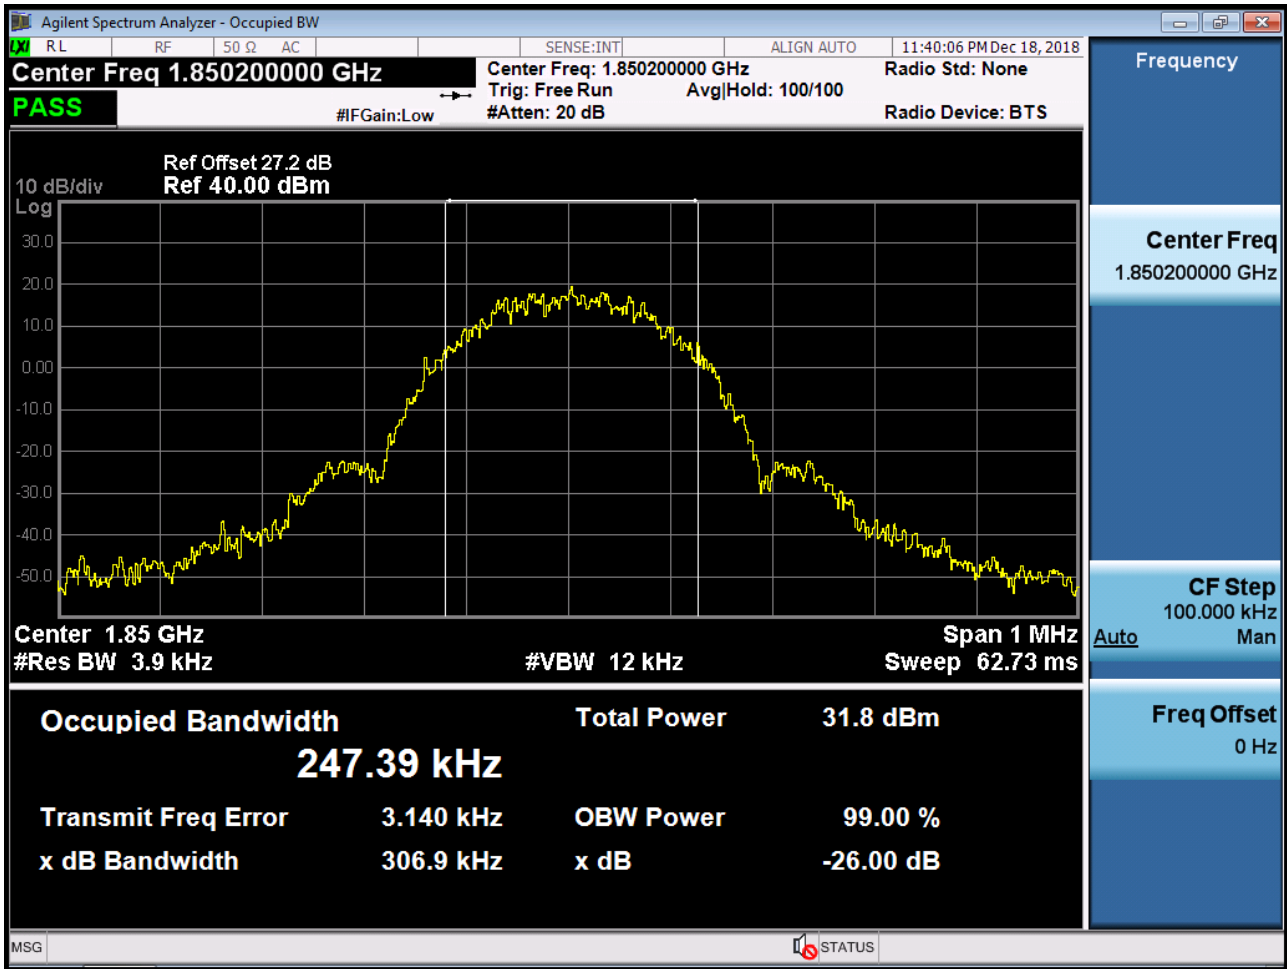


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

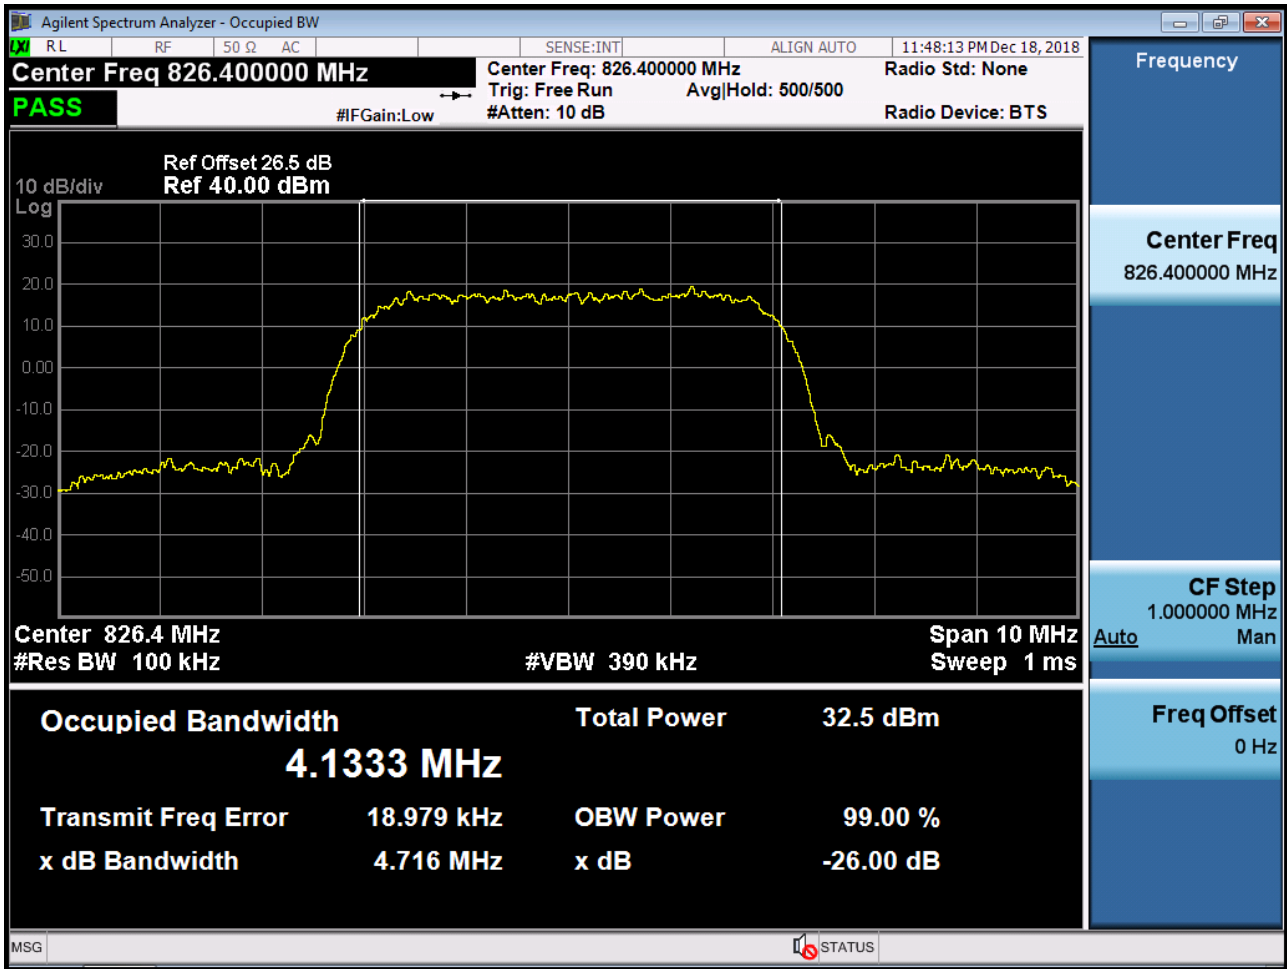





■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

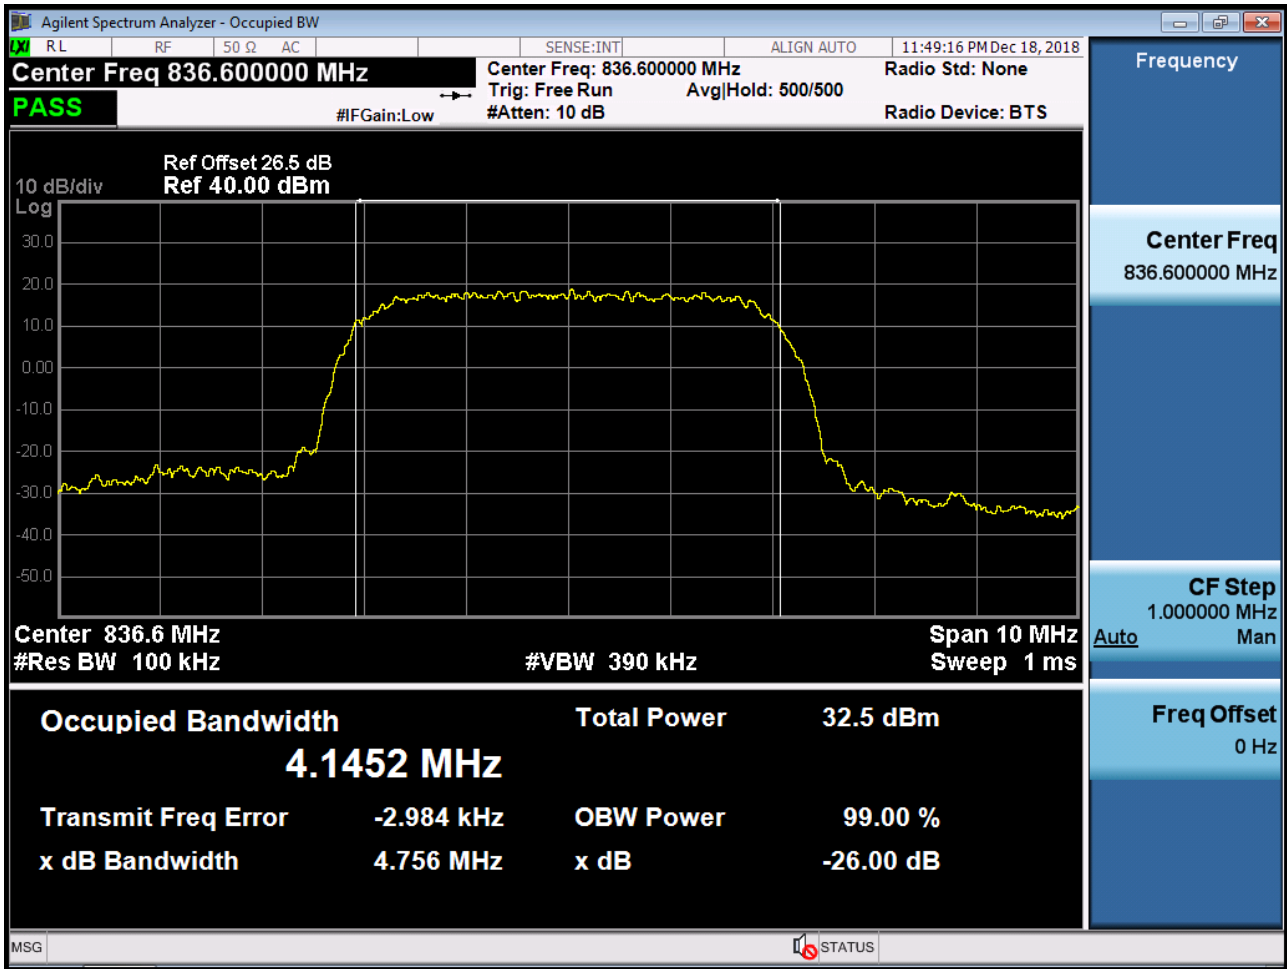


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

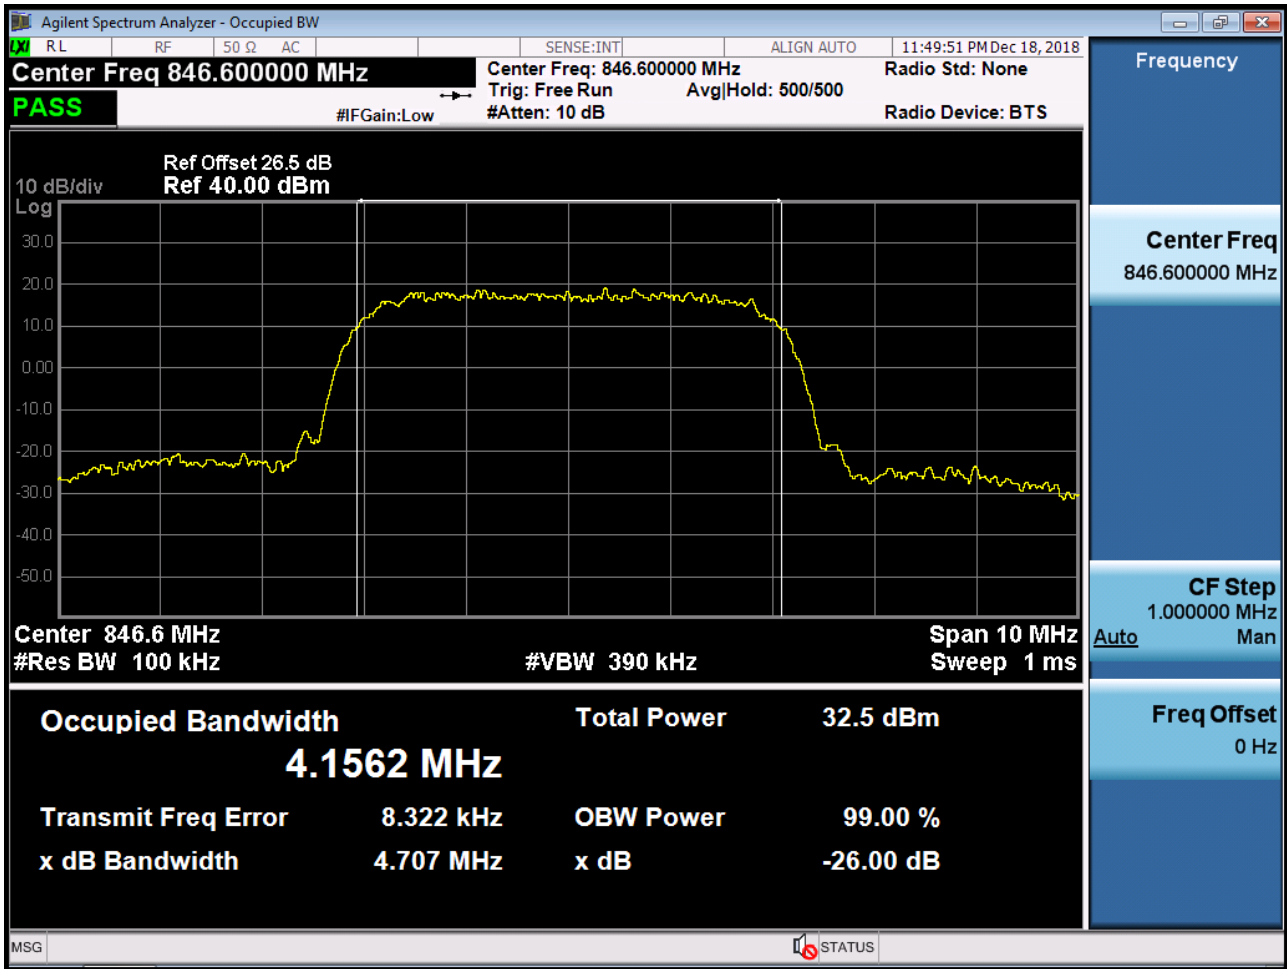


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

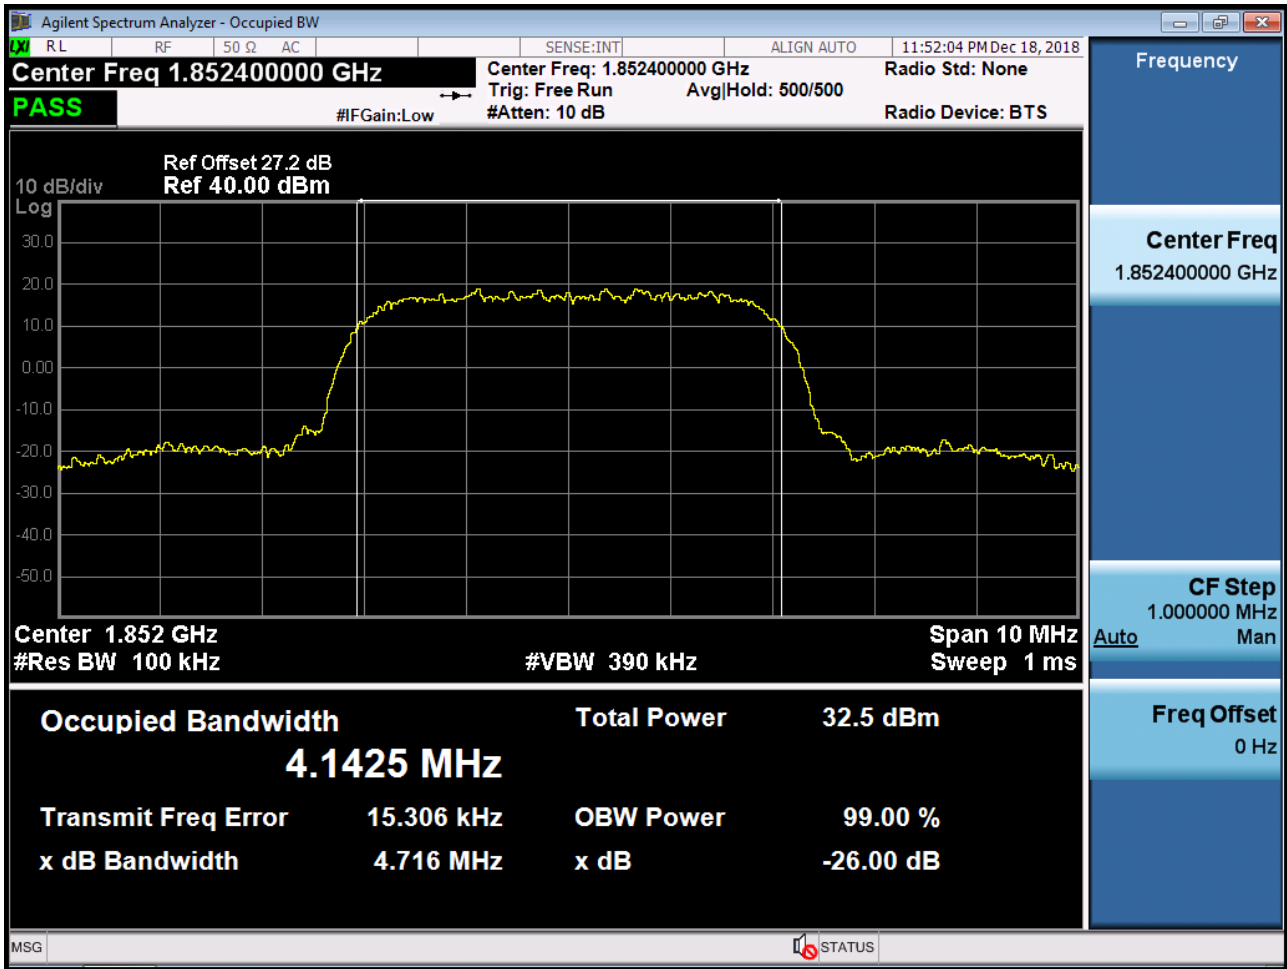

■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

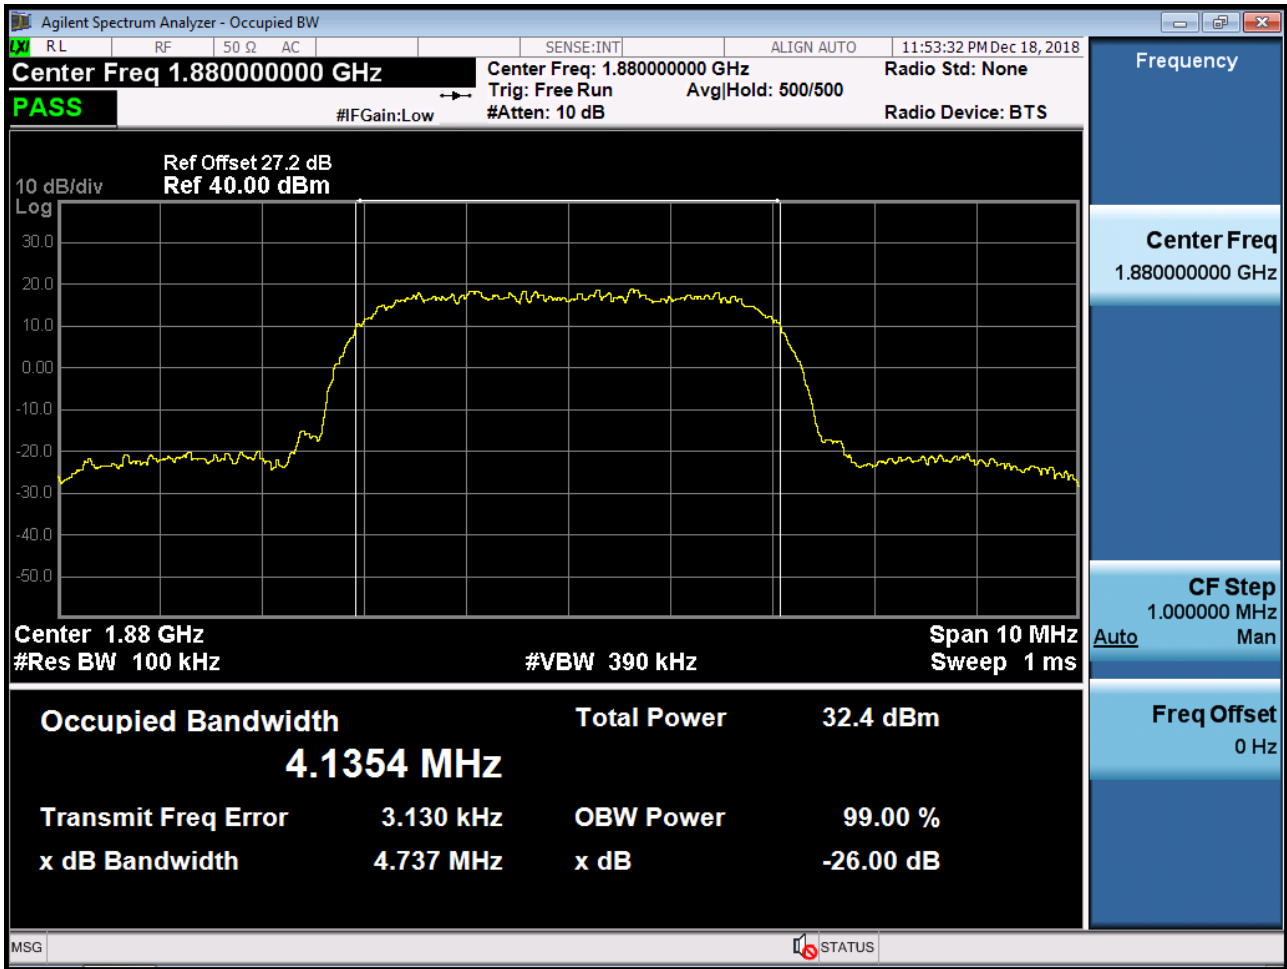


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

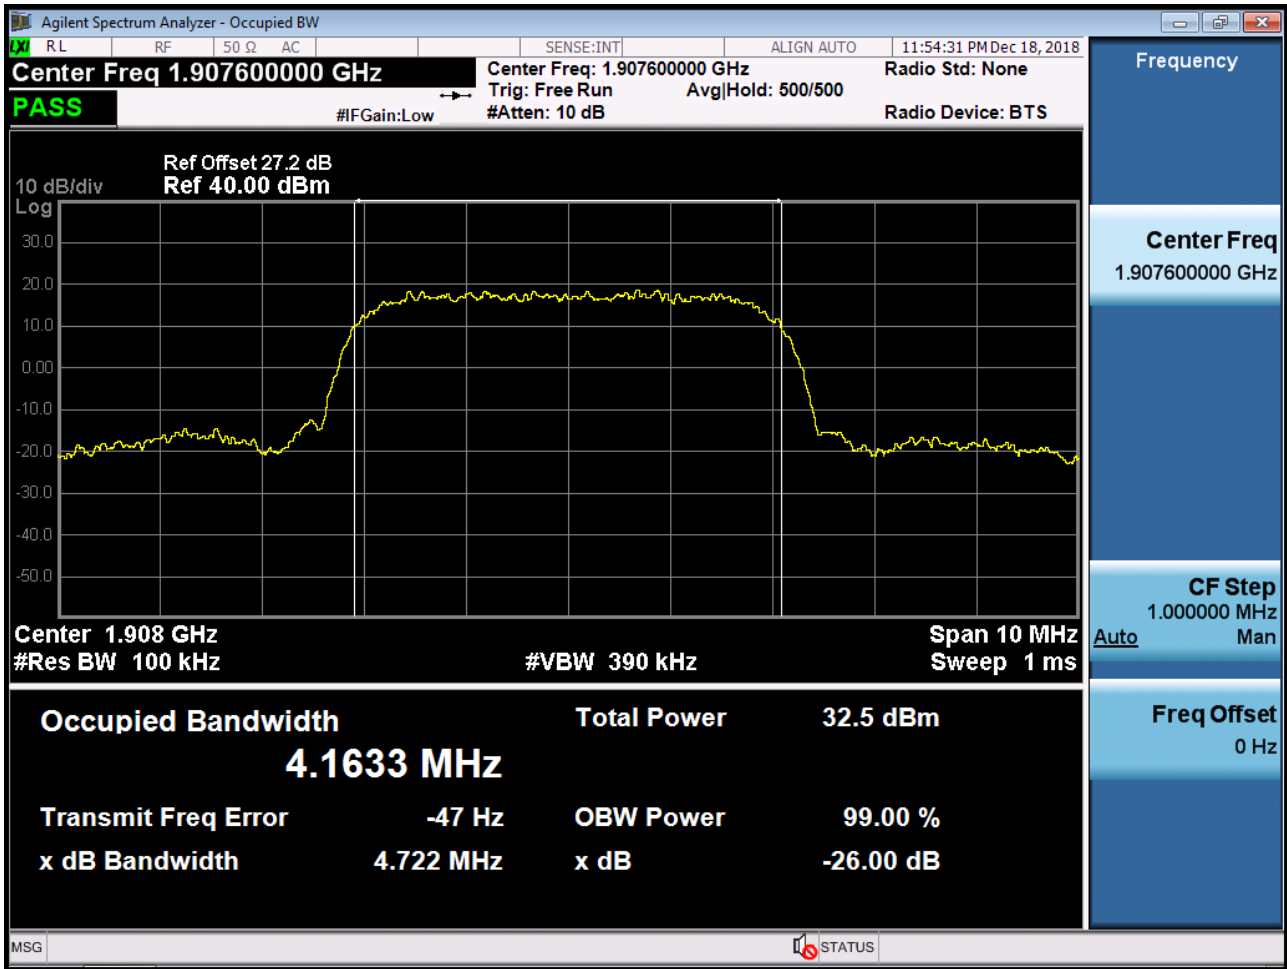


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P<sub>PK</sub>



■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P<sub>Avg</sub>

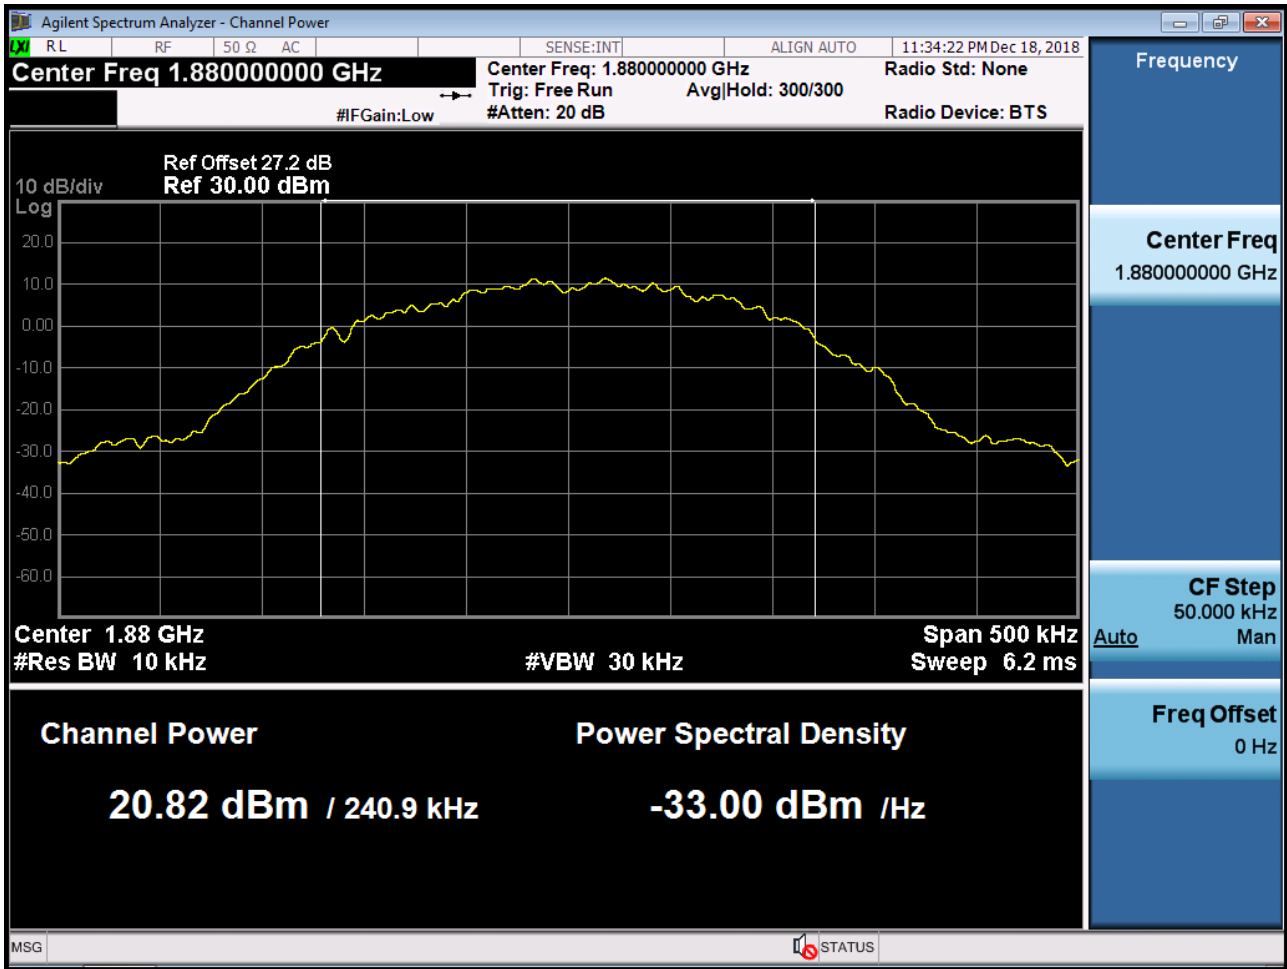


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio Duty

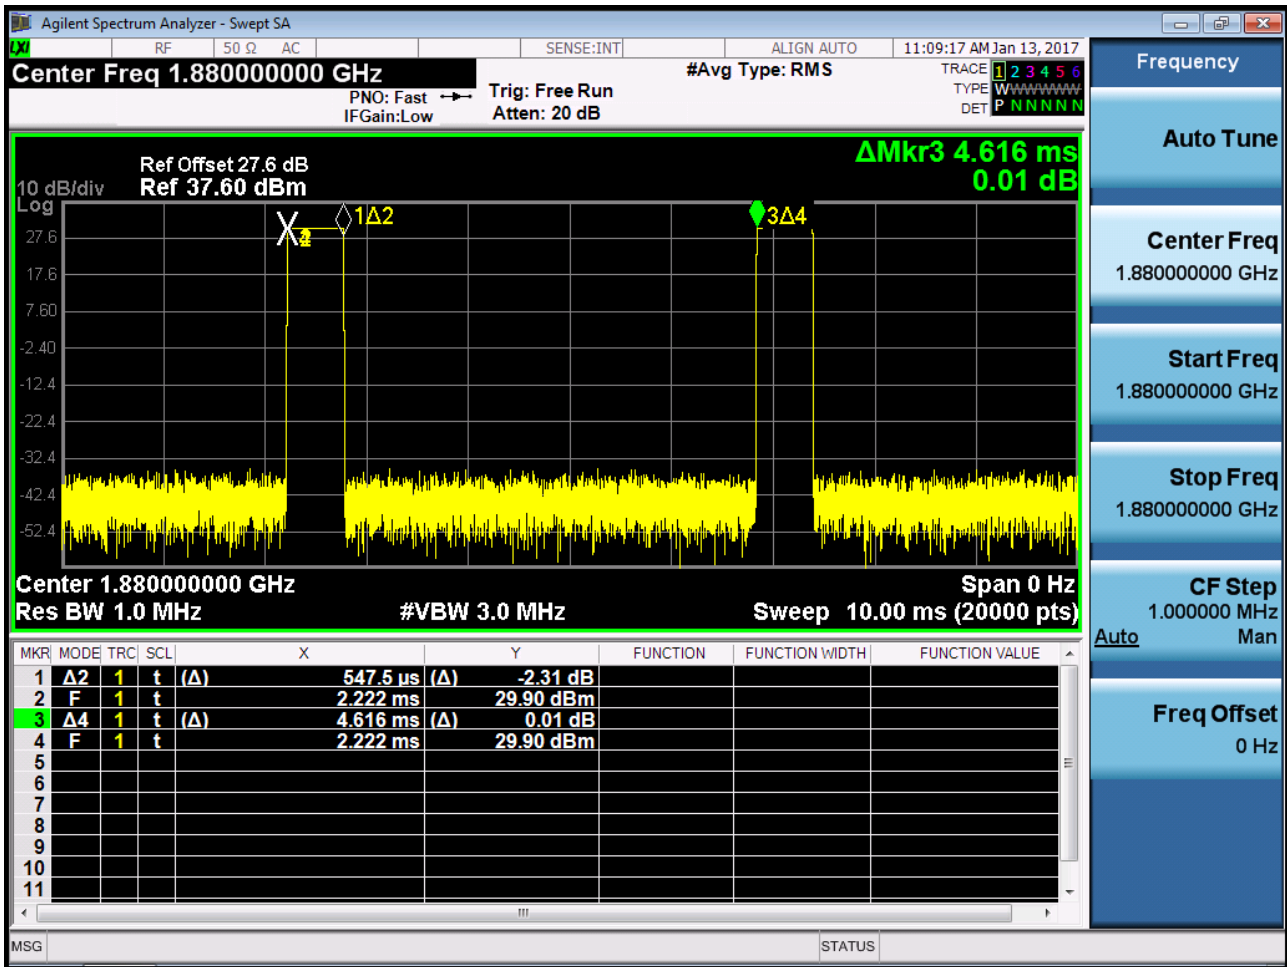




■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio Duty

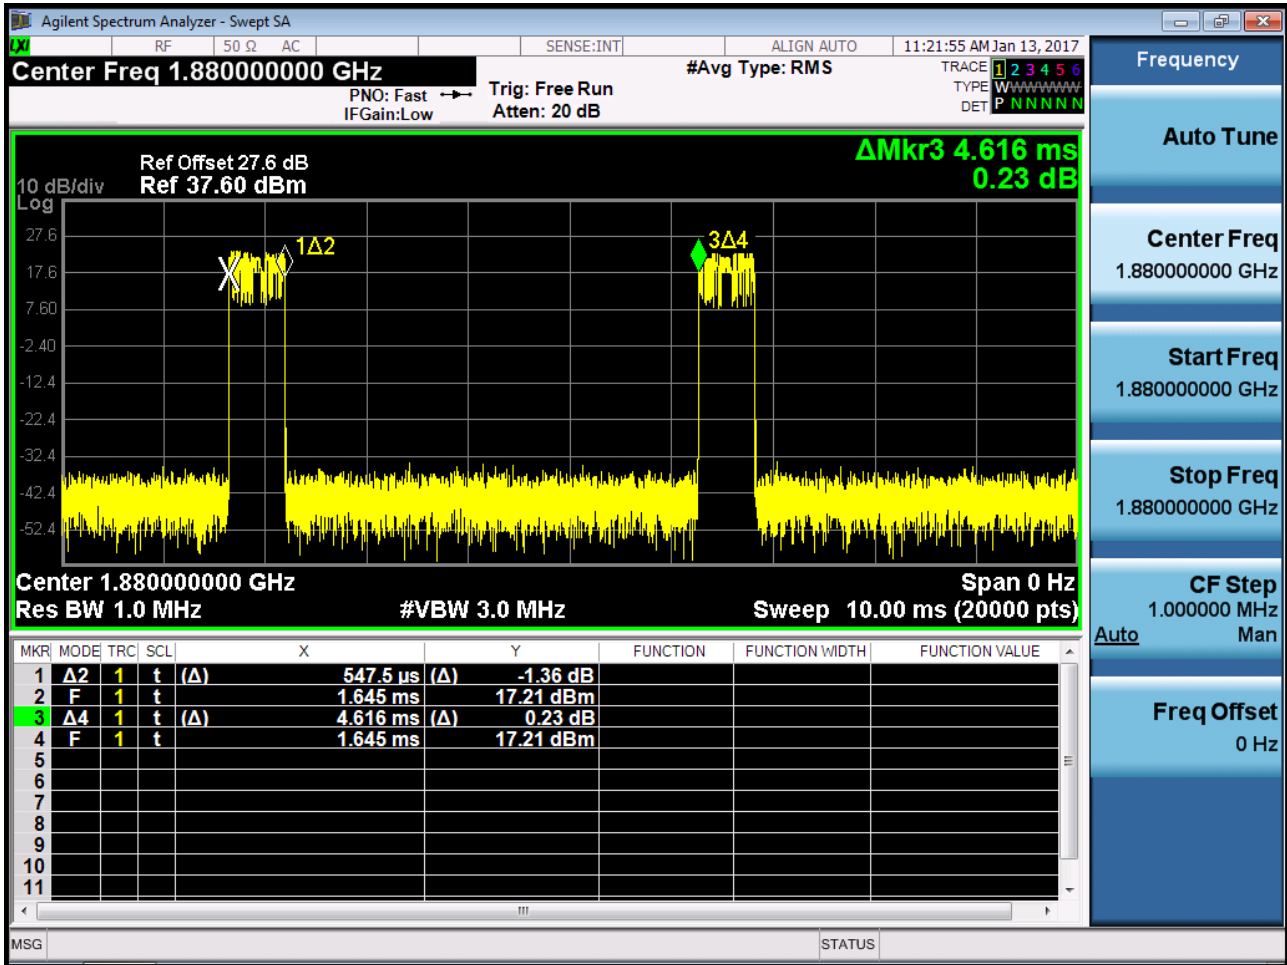


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P<sub>pk</sub>




■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P<sub>Avg</sub>

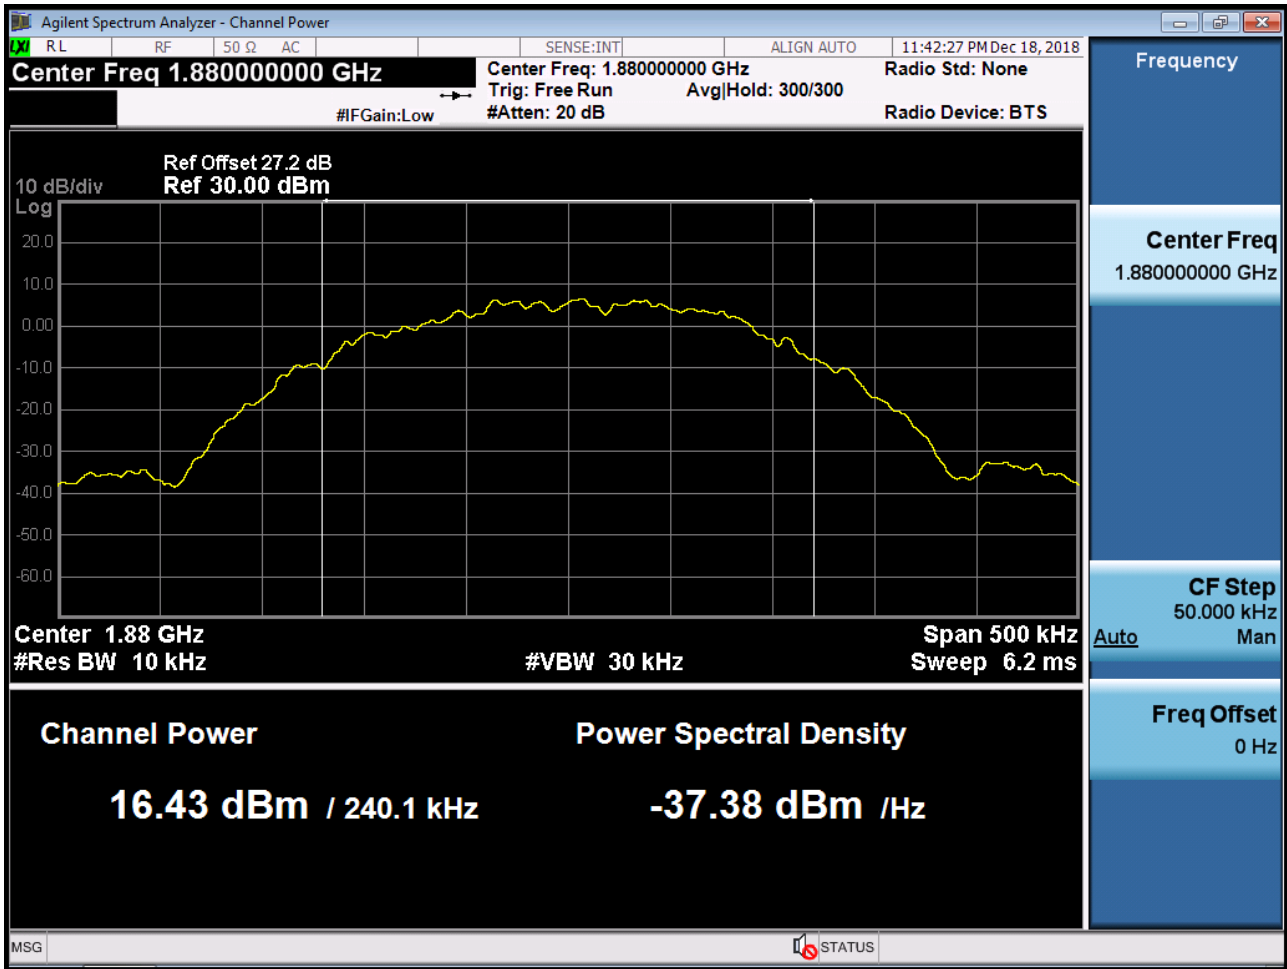


■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

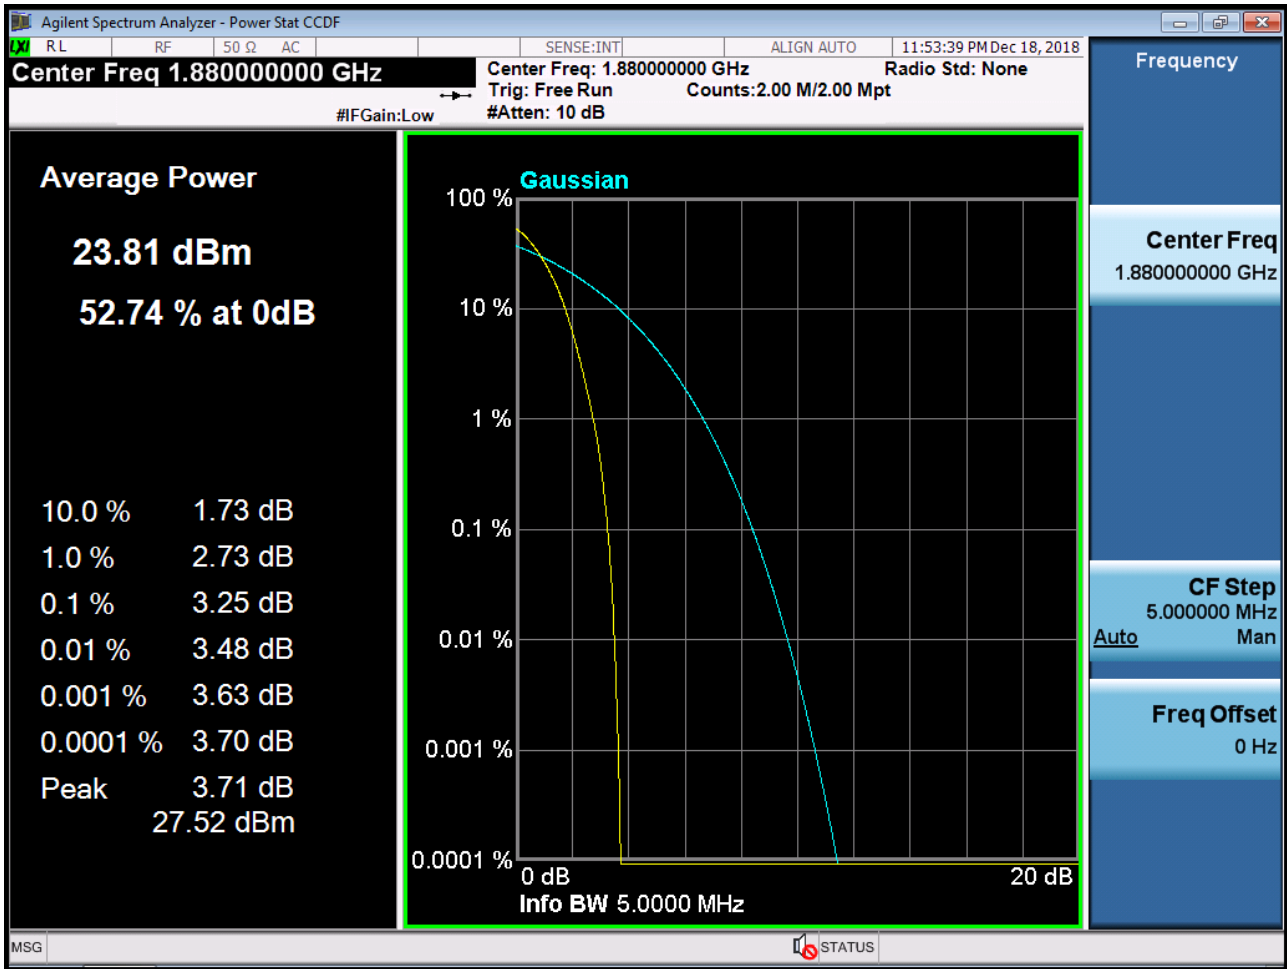


■ GSM850 MODE (128 CH.) Block Edge 1

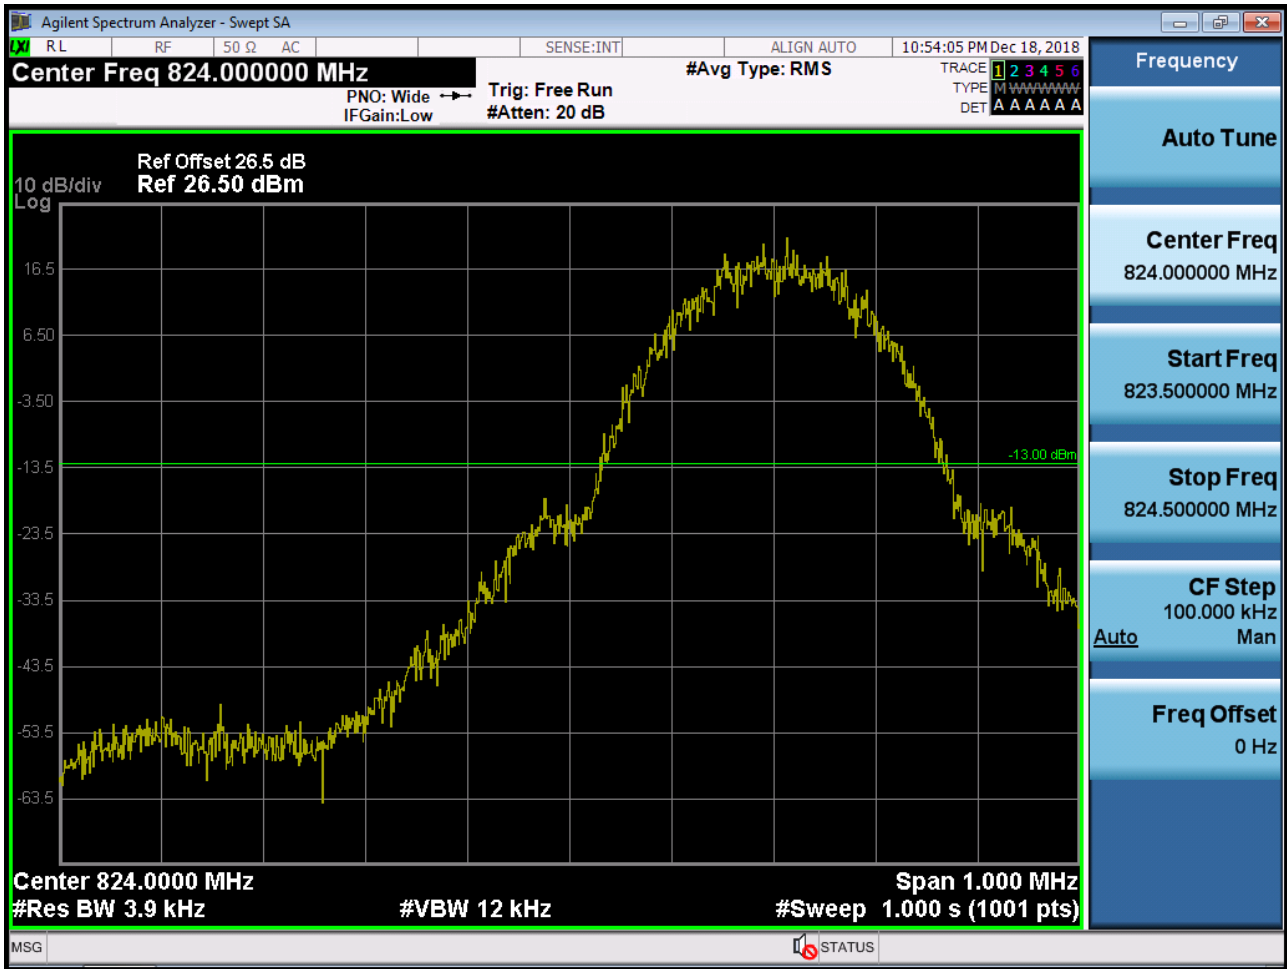


■ GSM850 MODE (128 CH.) Block Edge 2

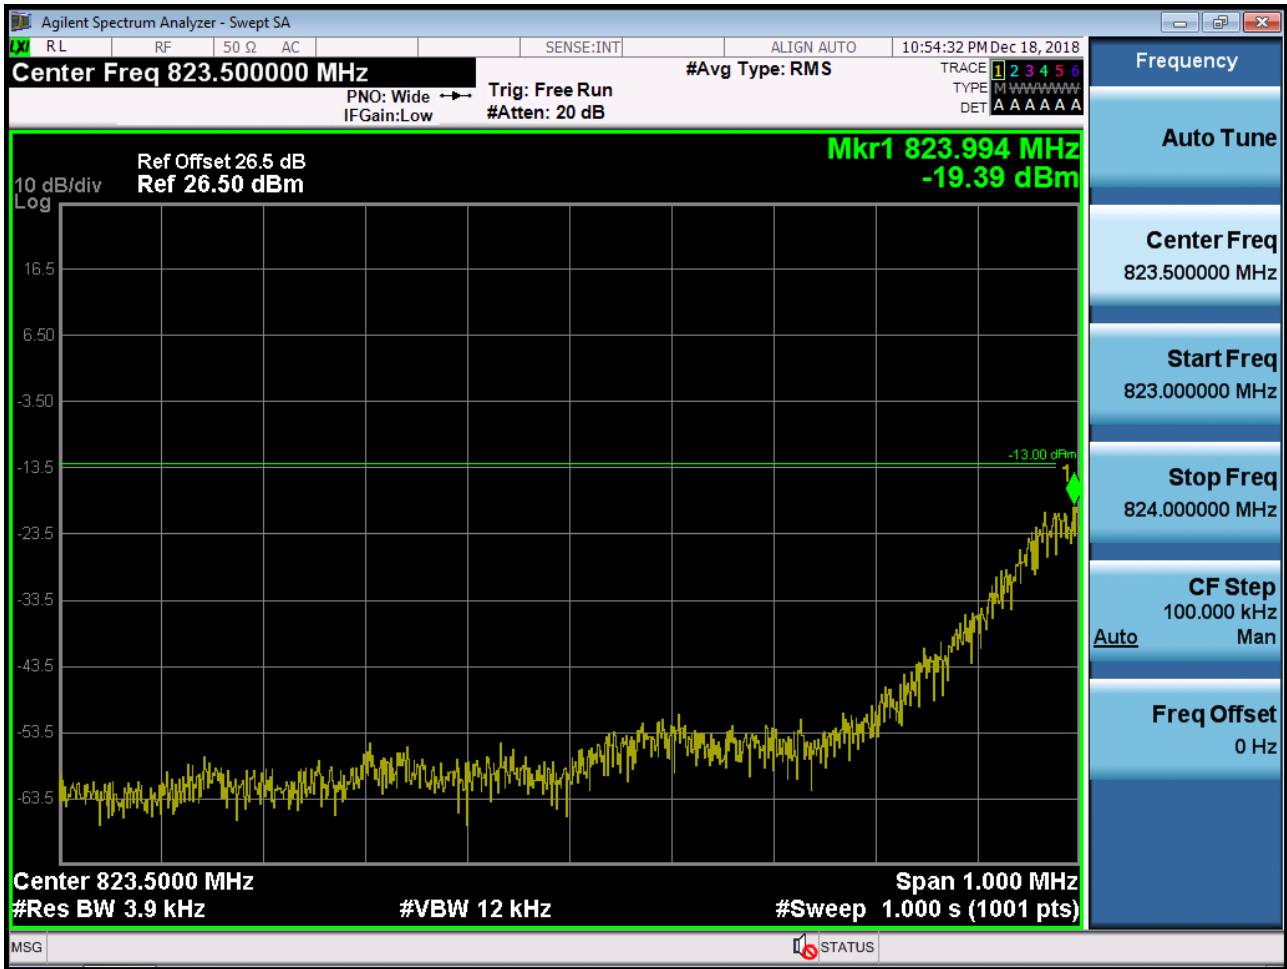

■ GSM850 MODE (128 CH.) Block Edge 3

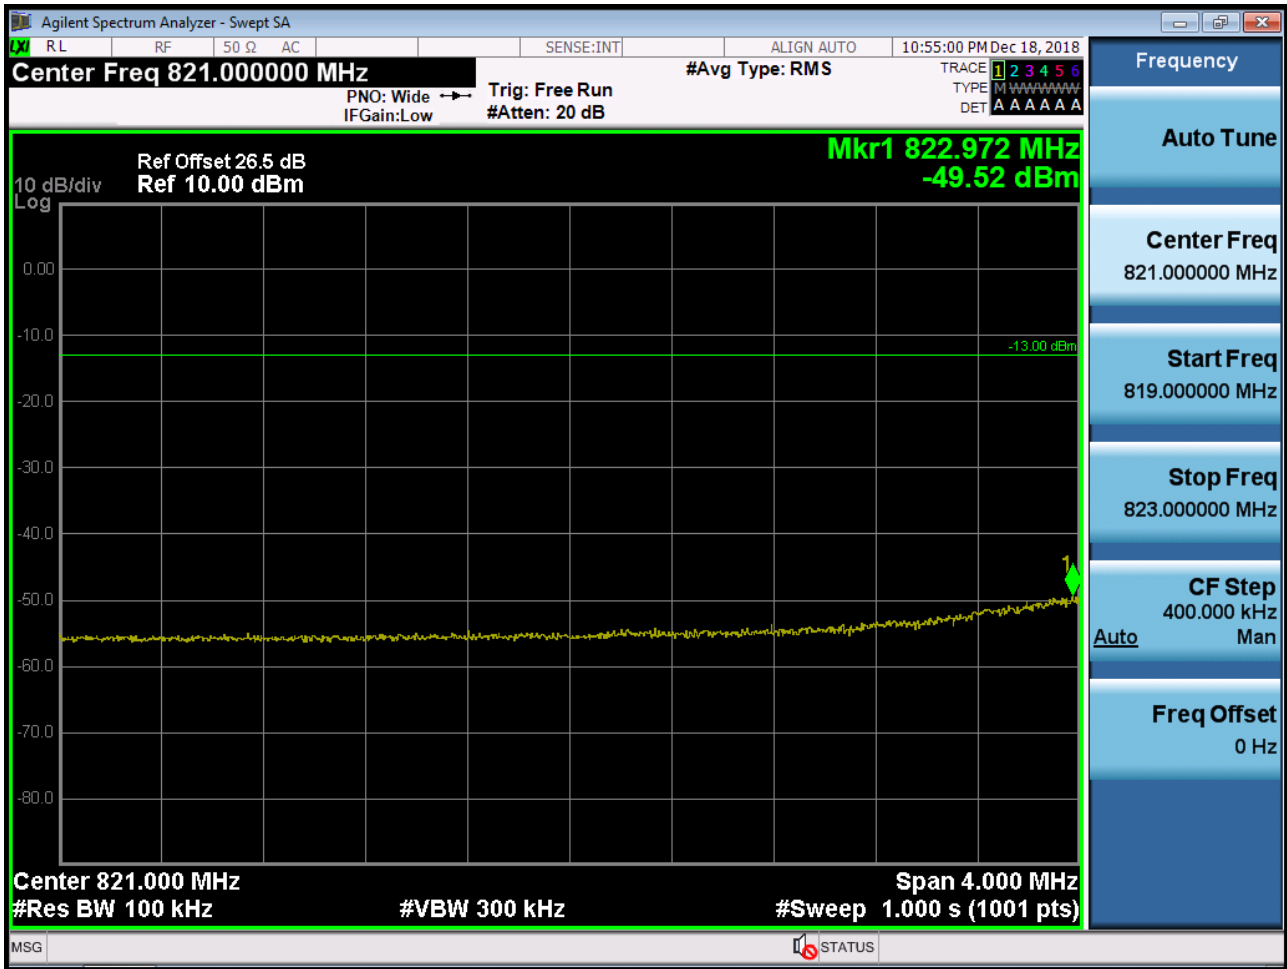


■ GSM850 MODE (251 CH.) Block Edge 1

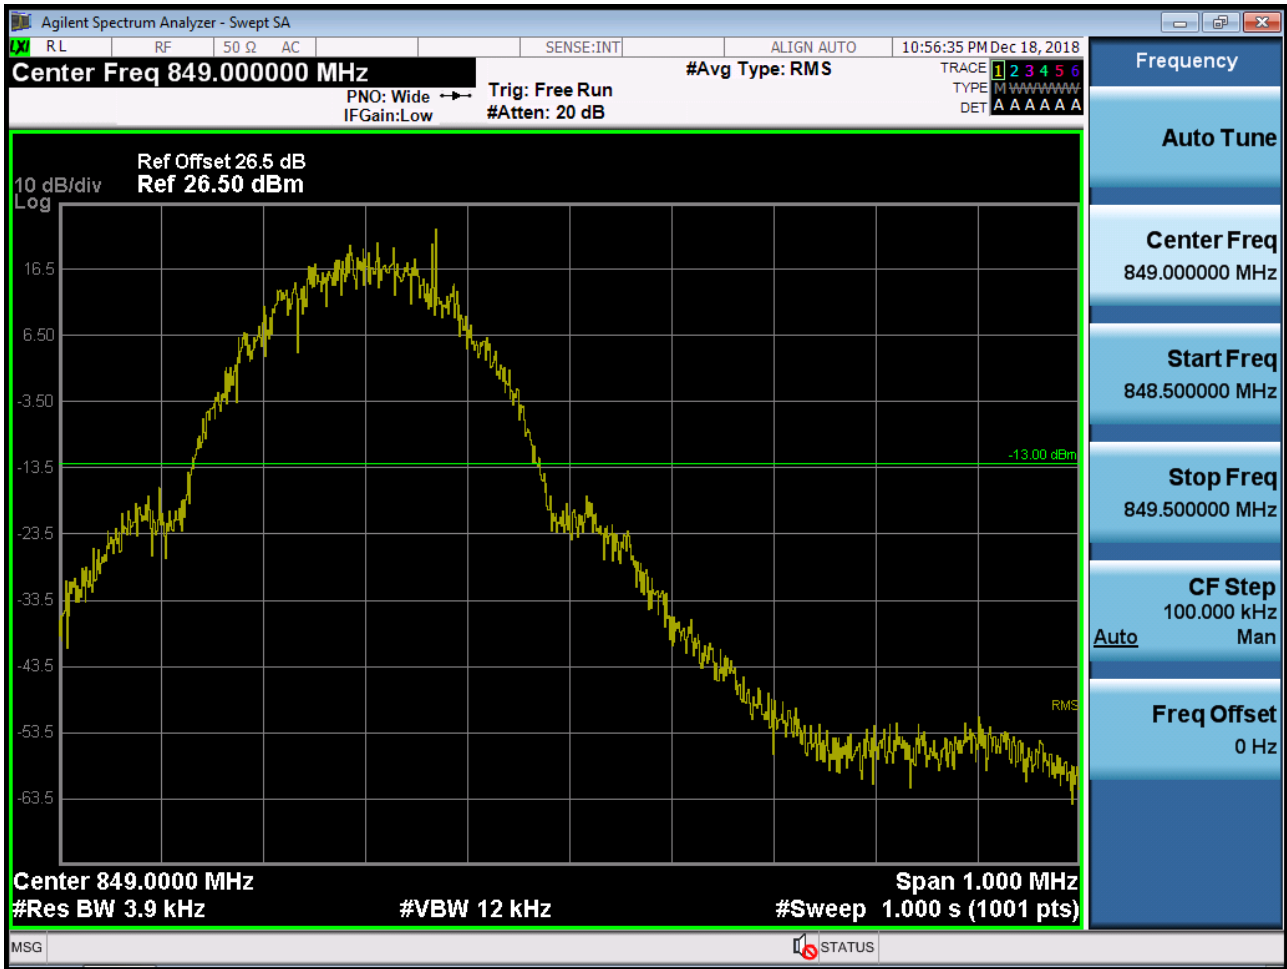





■ GSM850 MODE (251 CH.) Block Edge 2

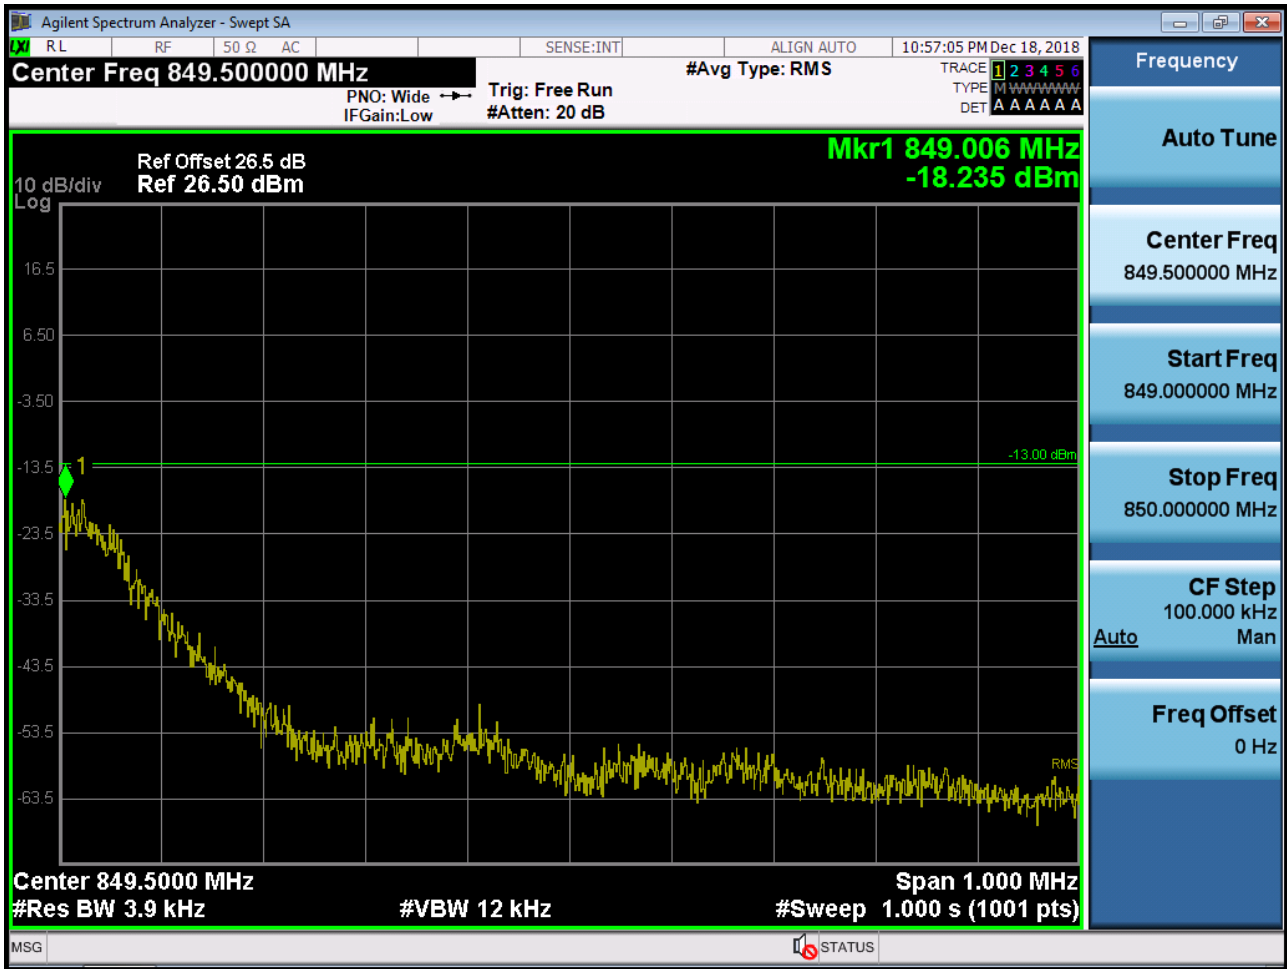


■ GSM850 MODE (251 CH.) Block Edge 3

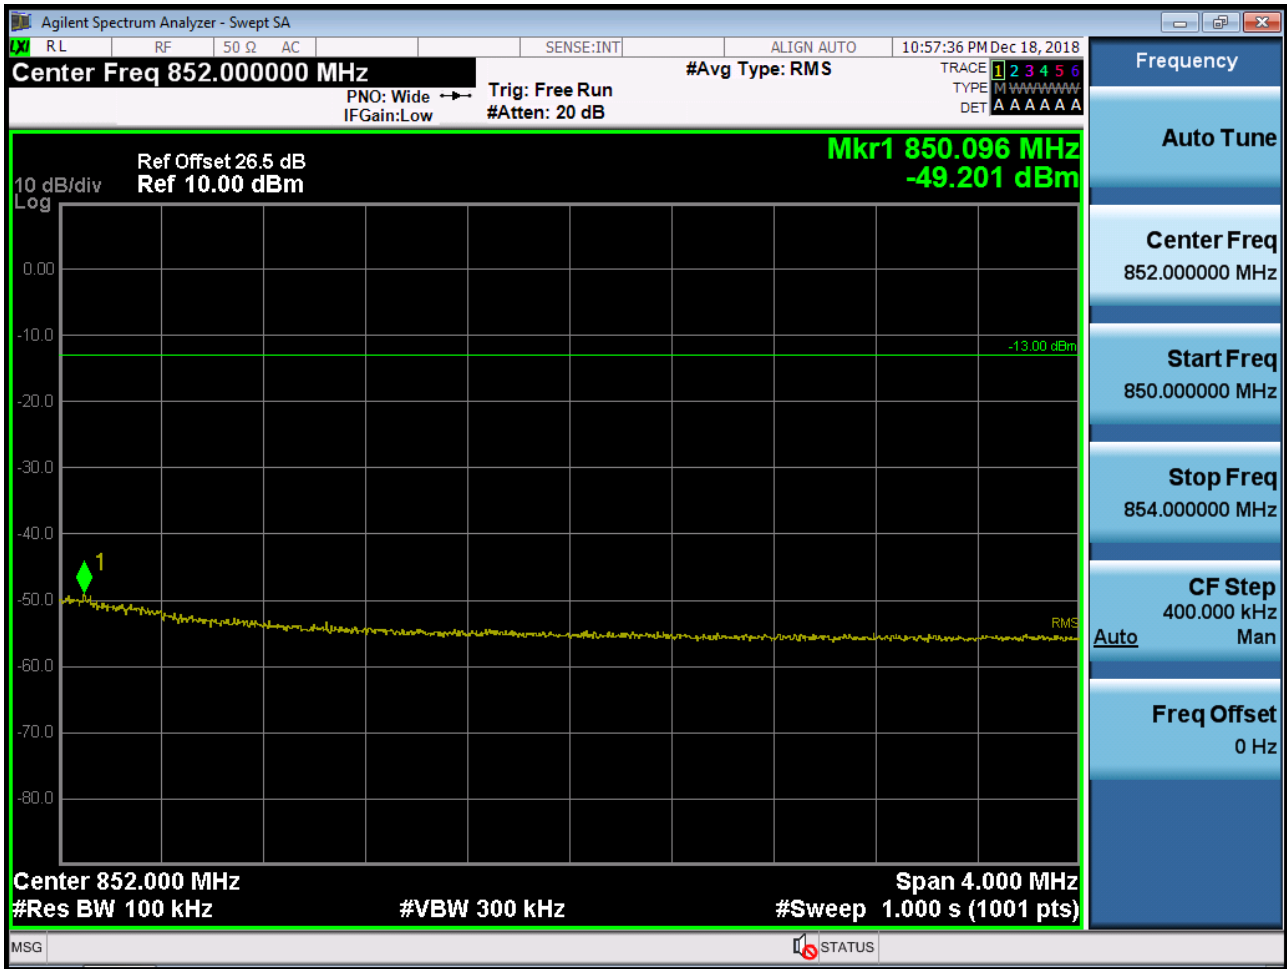


■ EDGE MODE (128 CH.) Block Edge 1

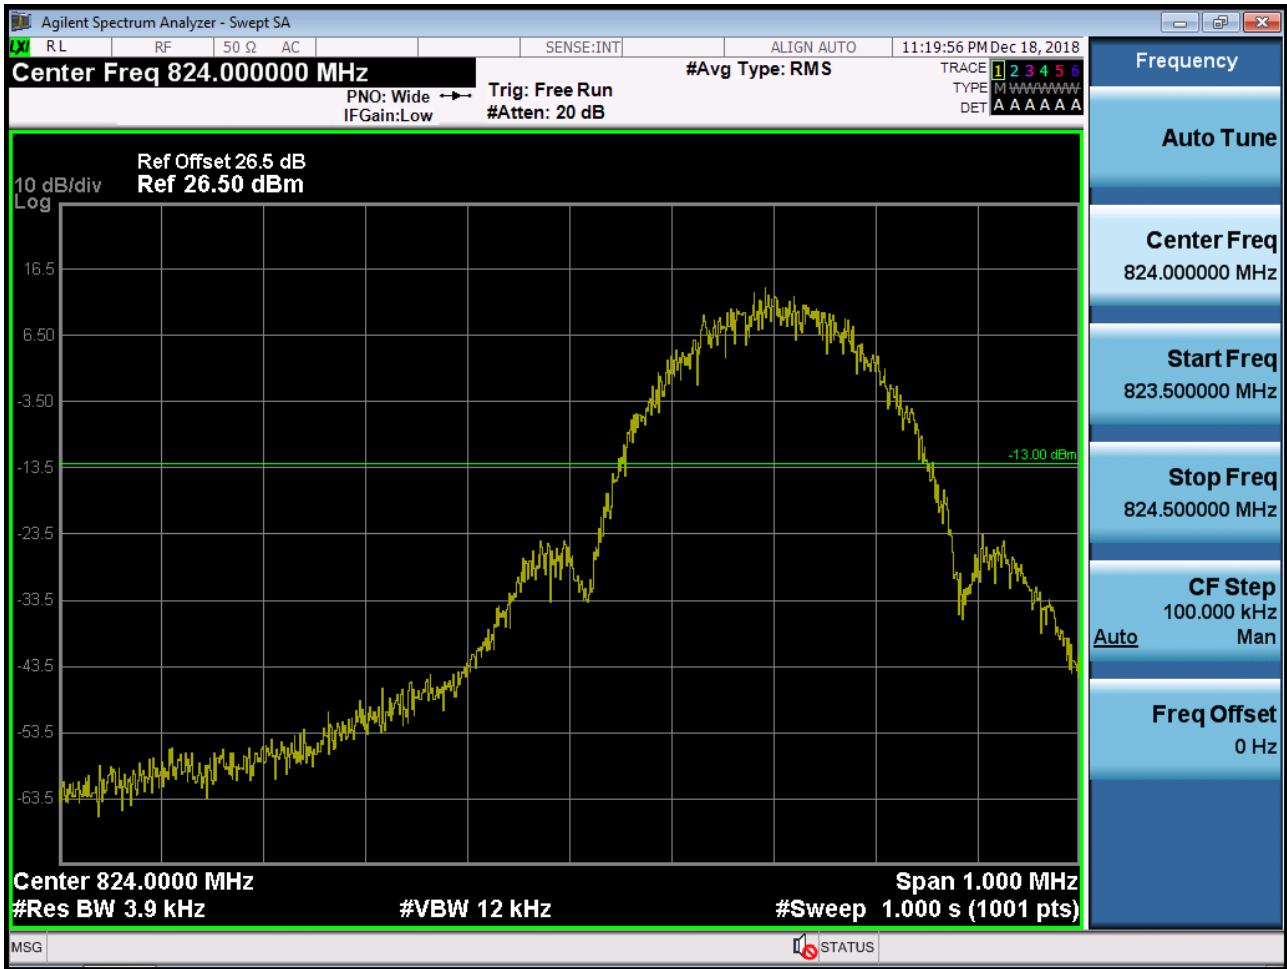


■ EDGE MODE (128 CH.) Block Edge 2

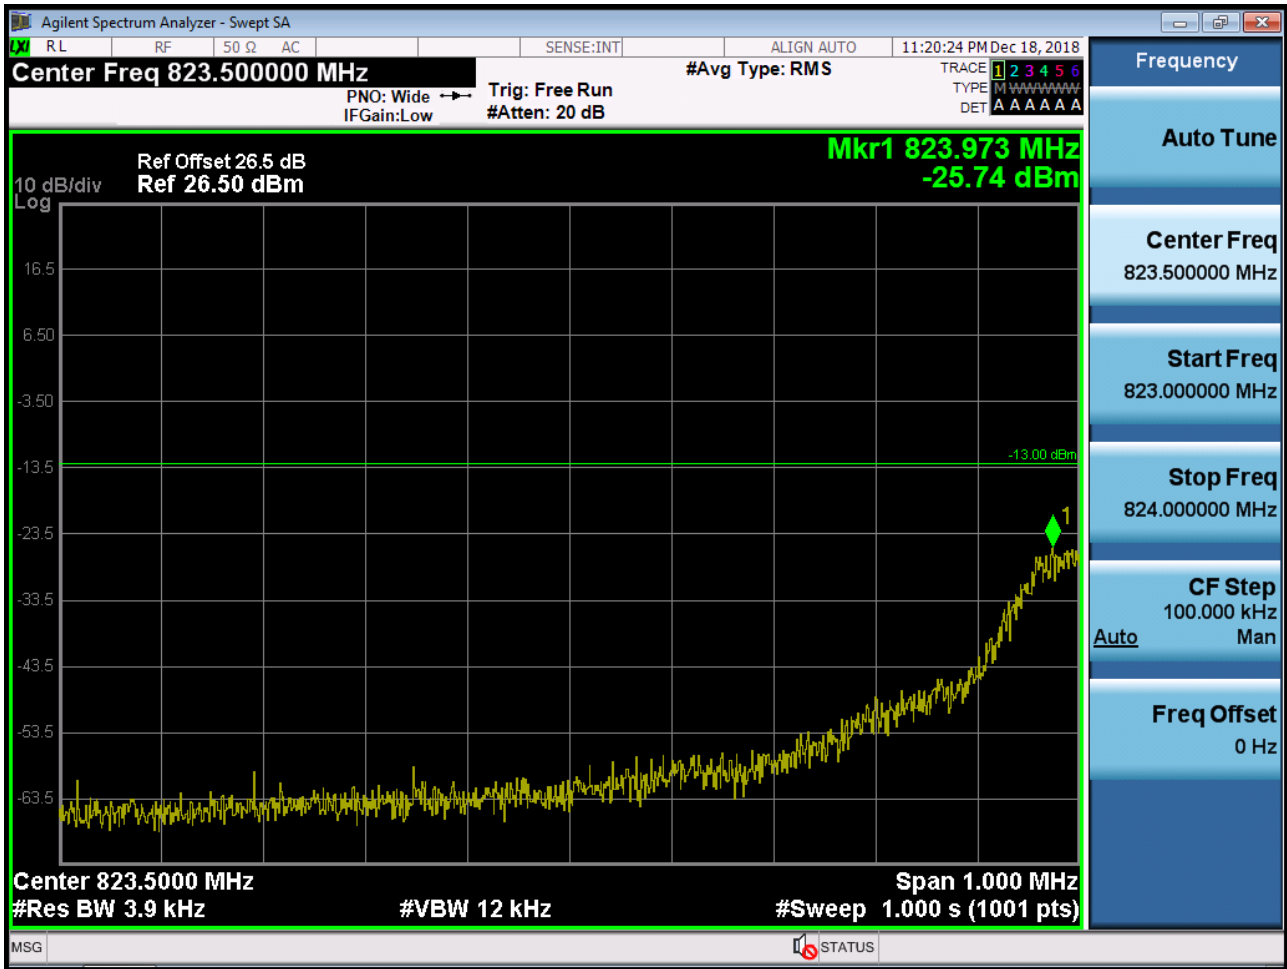


■ EDGE MODE (128 CH.) Block Edge 3

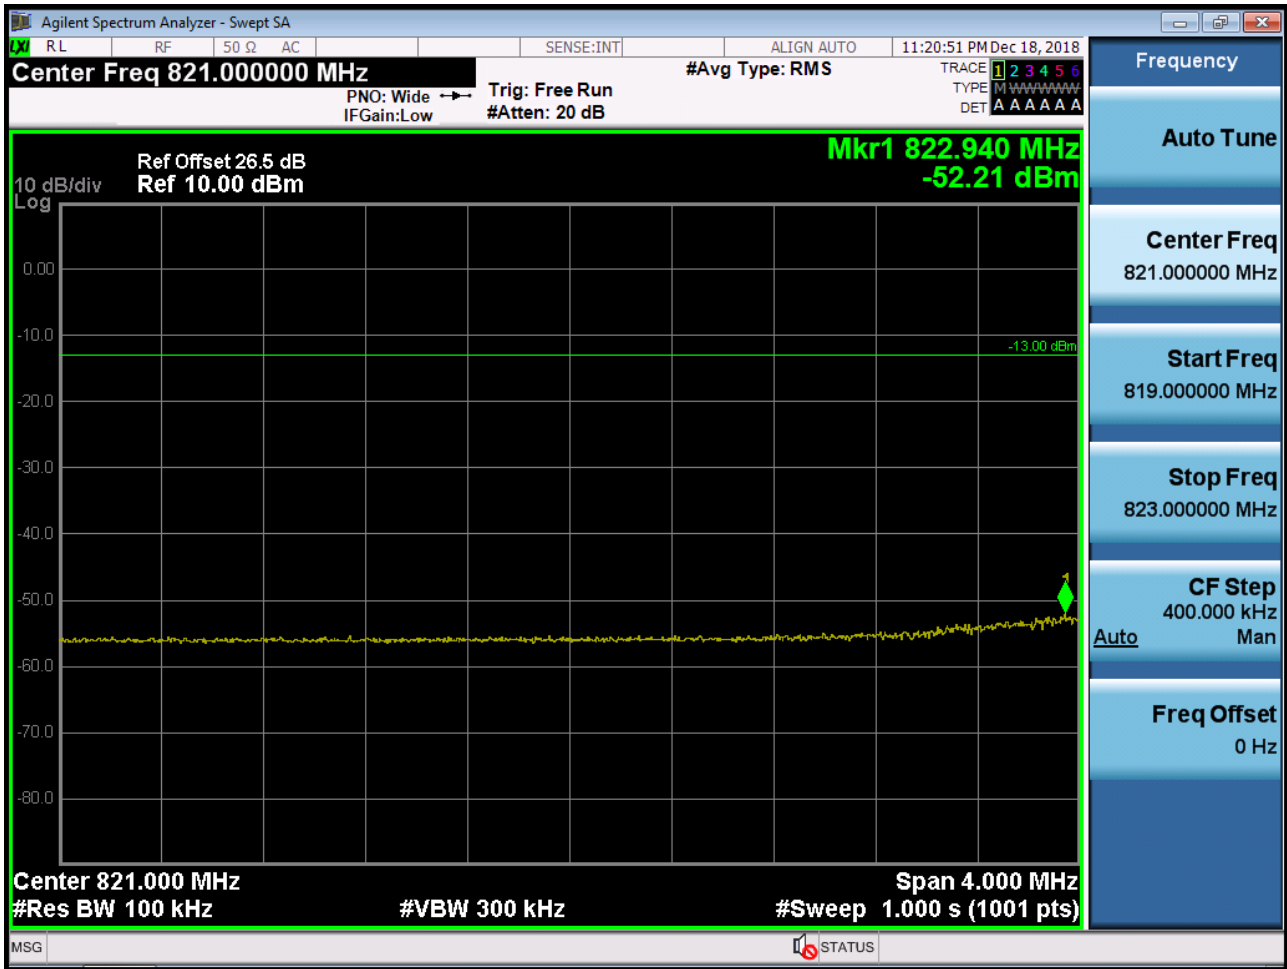


■ EDGE MODE (251 CH.) Block Edge 1

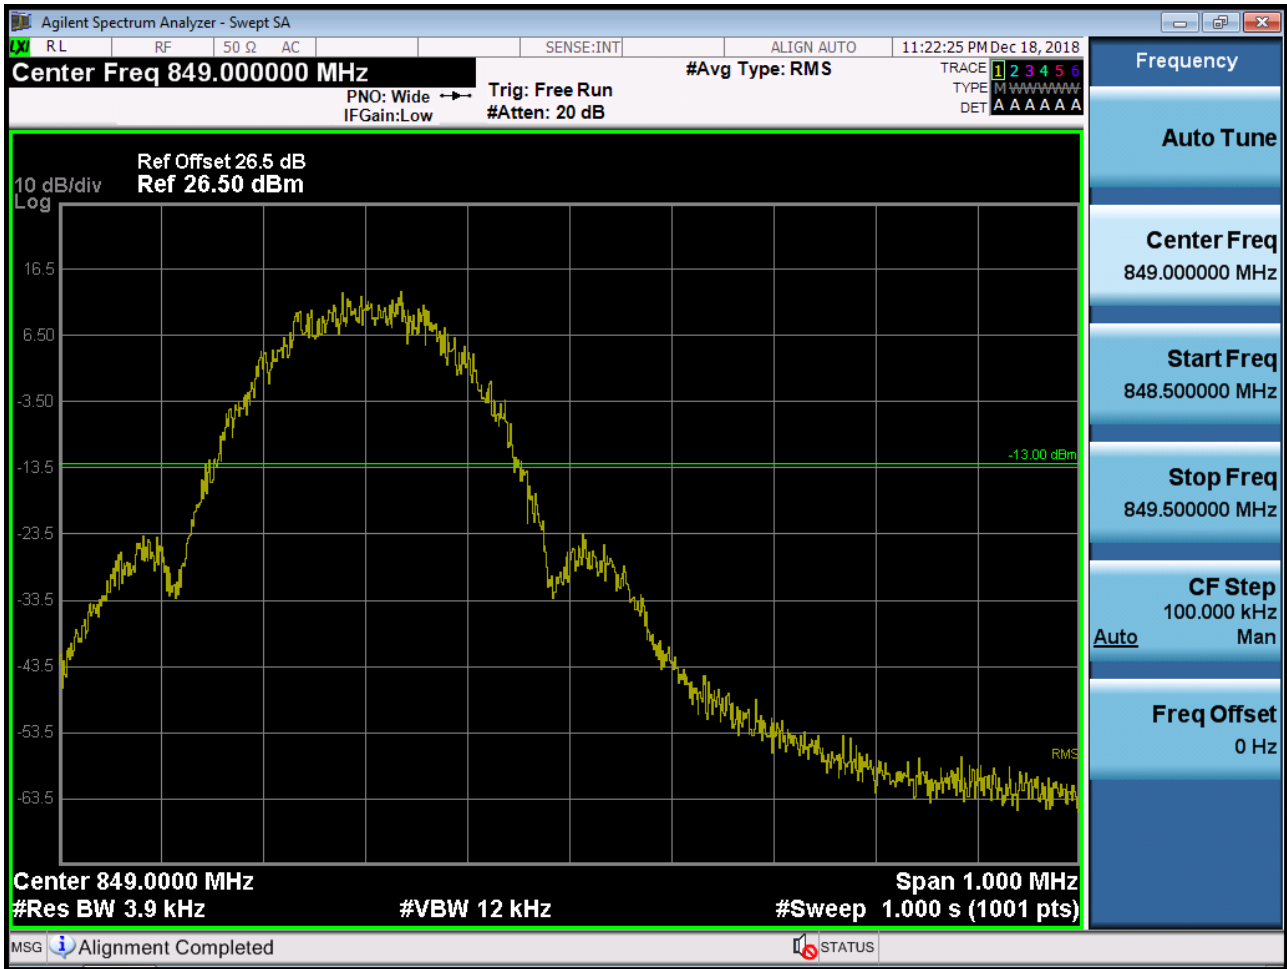

■ EDGE MODE (251 CH.) Block Edge 2

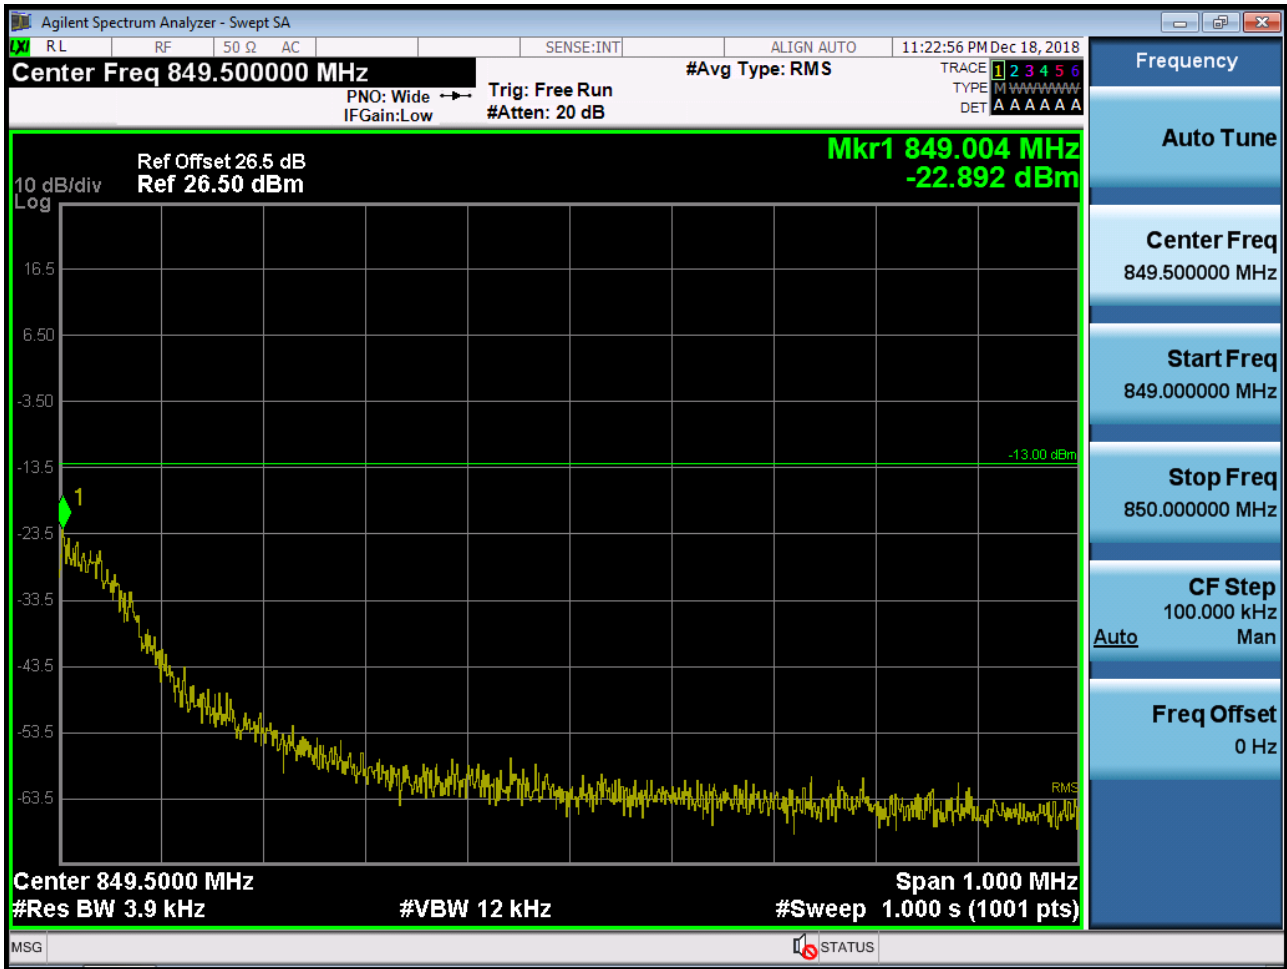


■ EDGE MODE (251 CH.) Block Edge 3

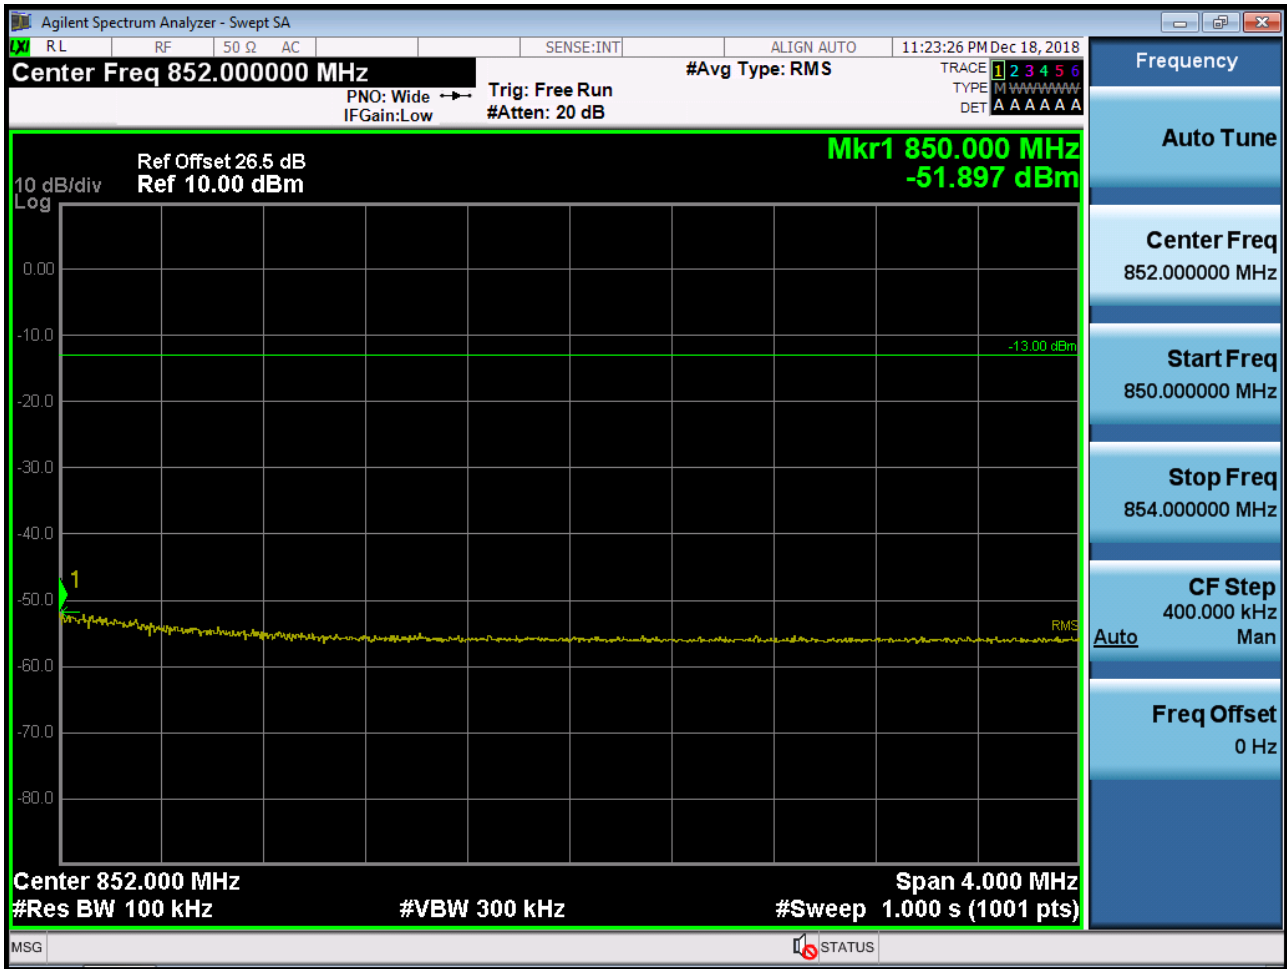





■ GSM1900 MODE (512 CH.) Block Edge 1

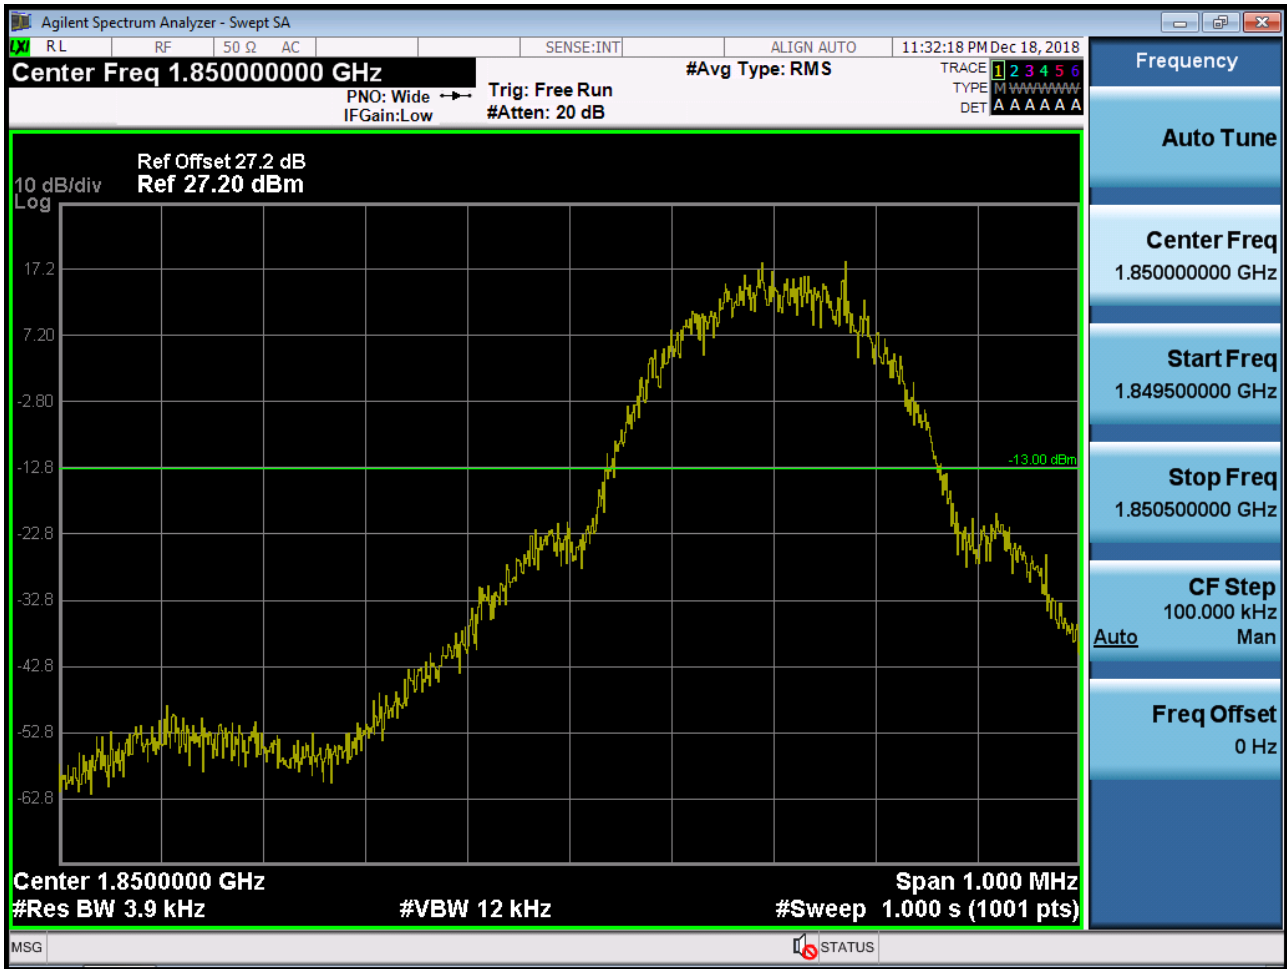

■ GSM1900 MODE (512 CH.) Block Edge 2

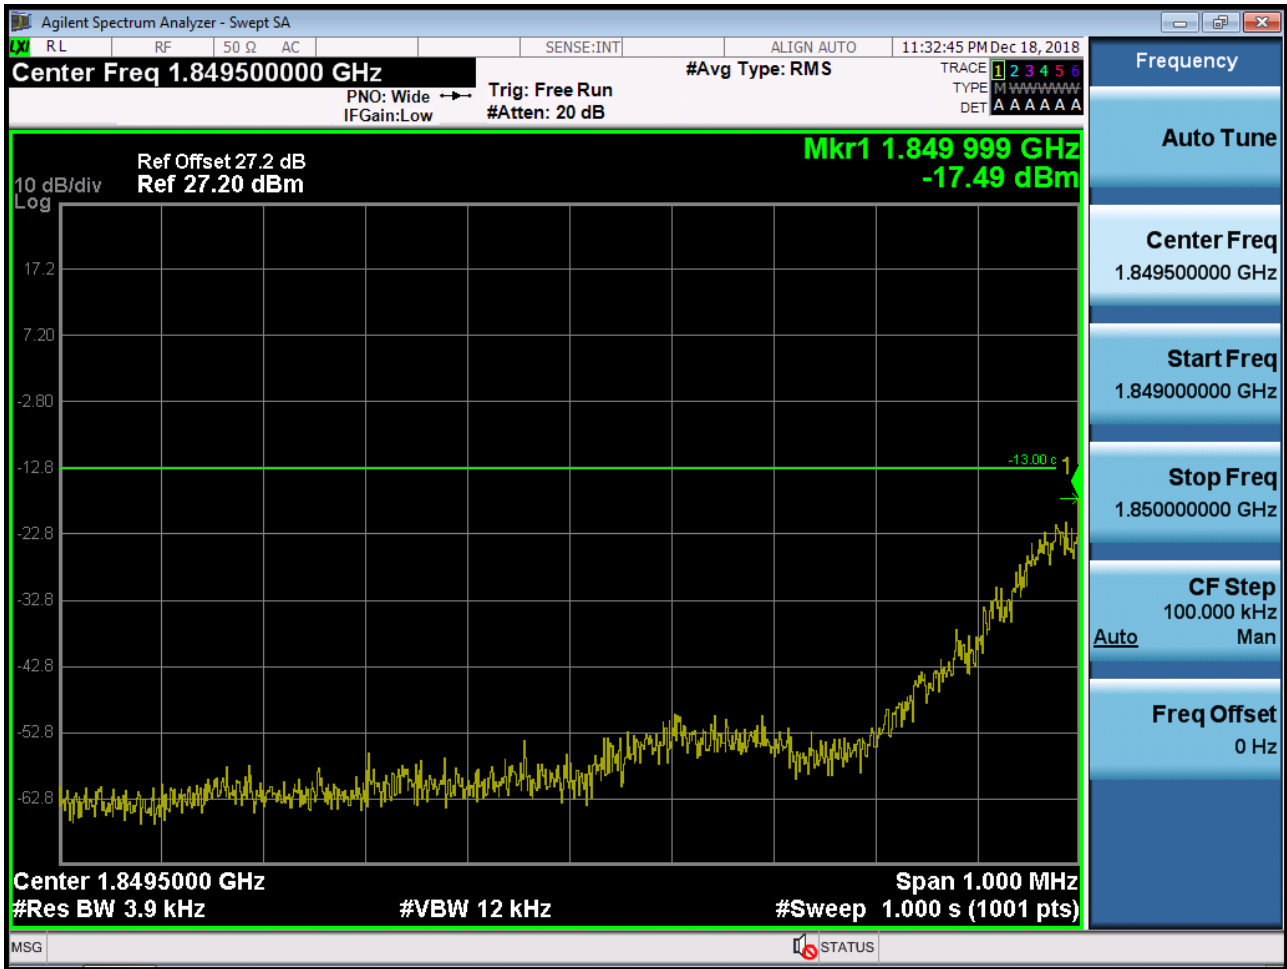


■ GSM1900 MODE (512 CH.) Block Edge 3

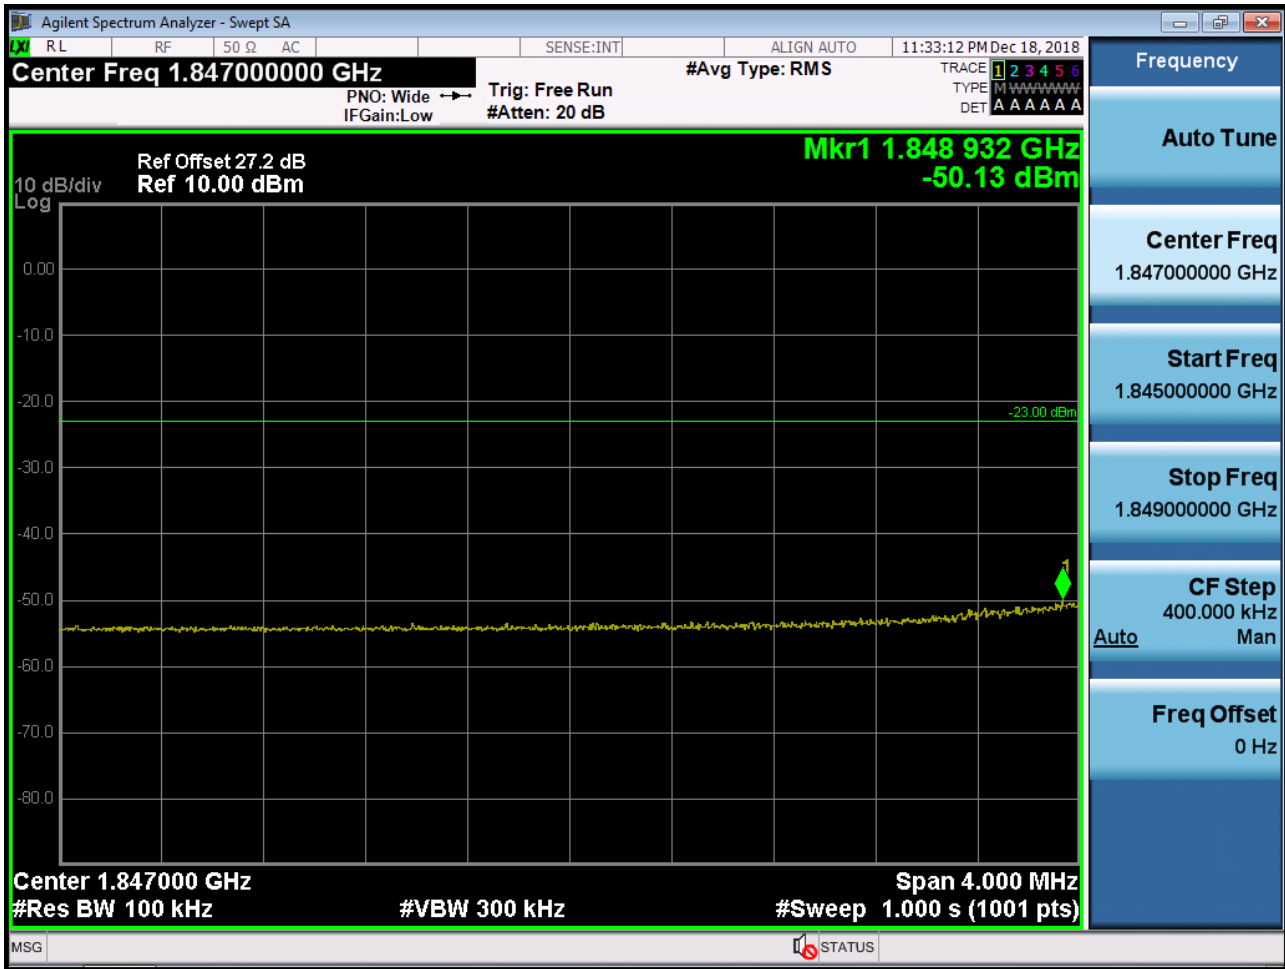


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value +  $10 \cdot \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -50.13 \text{ dBm} + 10 \text{ dB} = -40.13 \text{ dBm}$

■ GSM1900 MODE (810 CH.) Block Edge 1

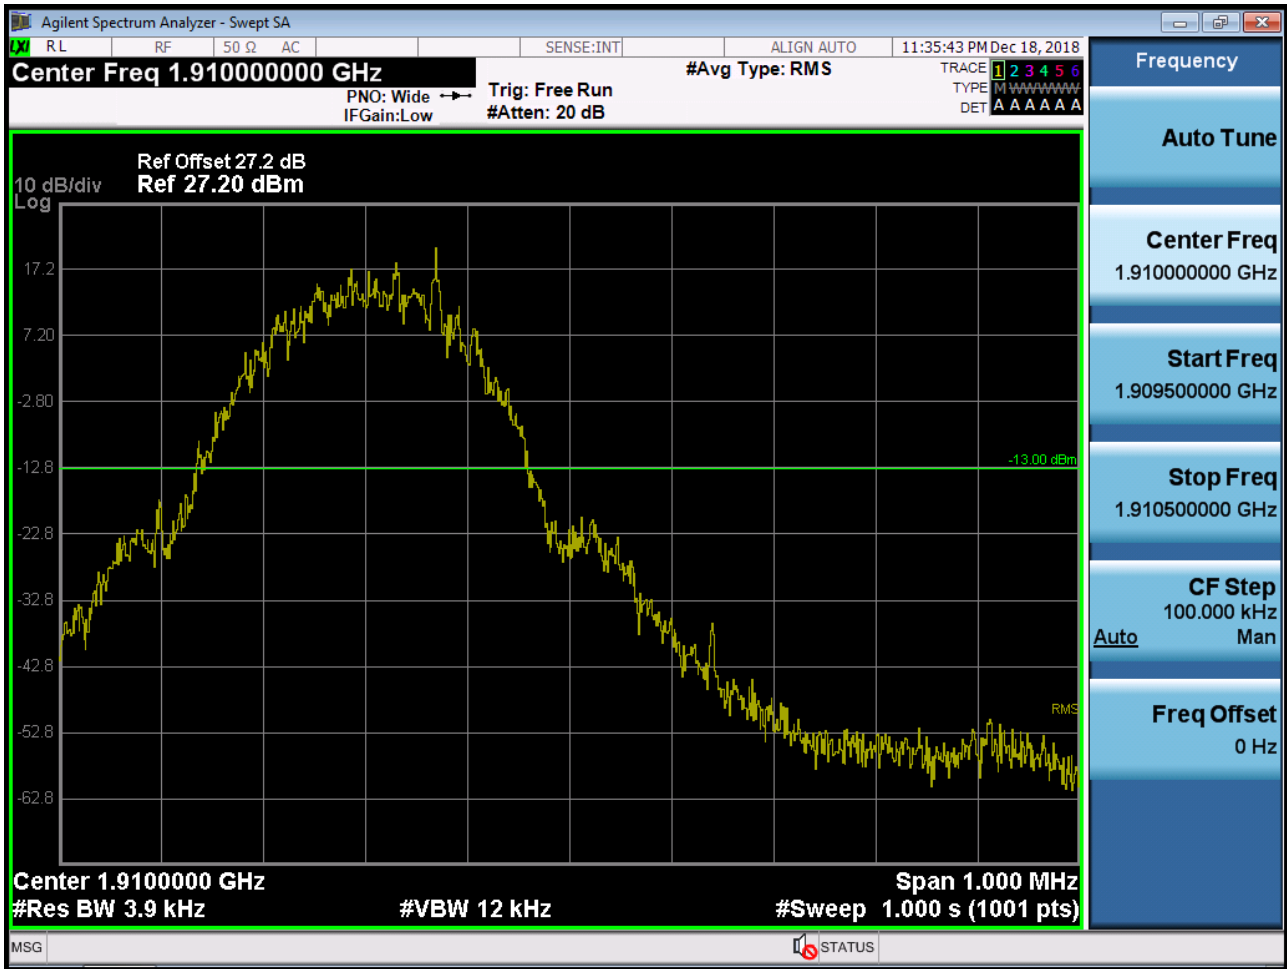

■ GSM1900 MODE (810 CH.) Block Edge 2

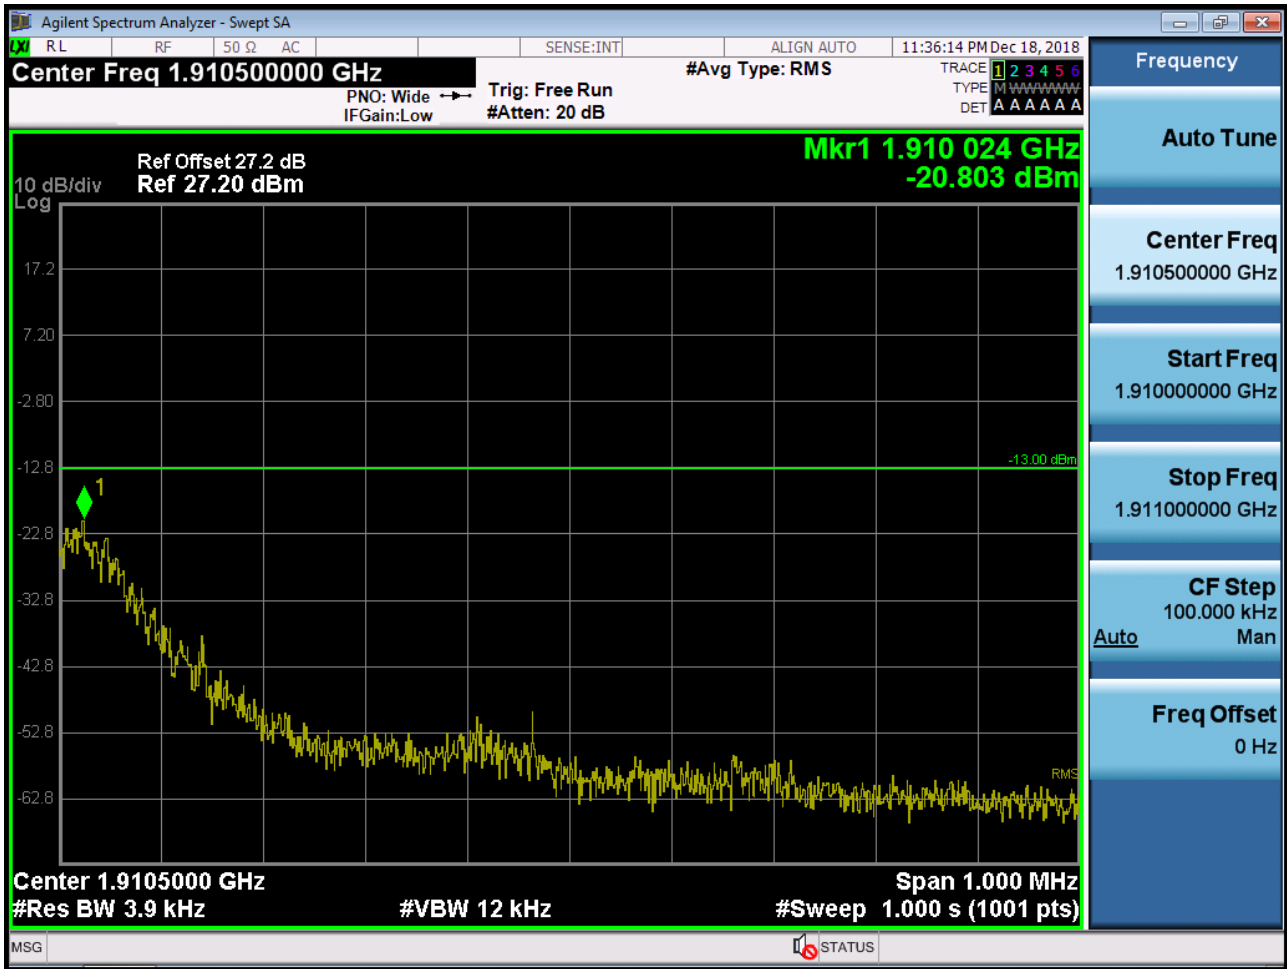


■ GSM1900 MODE (810 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value +  $10 \cdot \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -49.699 \text{ dBm} + 10 \text{ dB} = -39.699 \text{ dBm}$

■ EDGE MODE (512 CH.) Block Edge 1

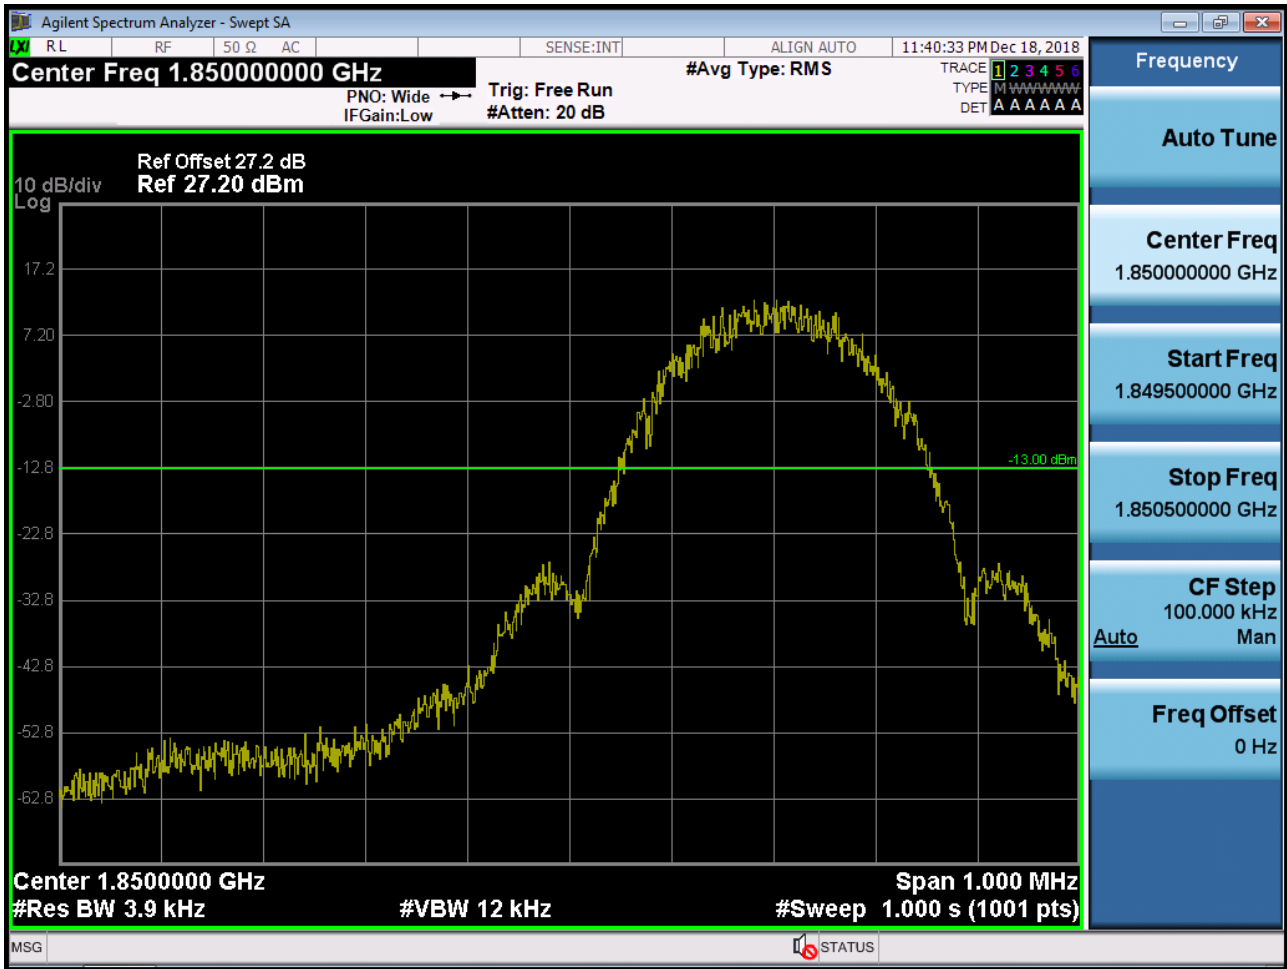

■ EDGE MODE (512 CH.) Block Edge 2

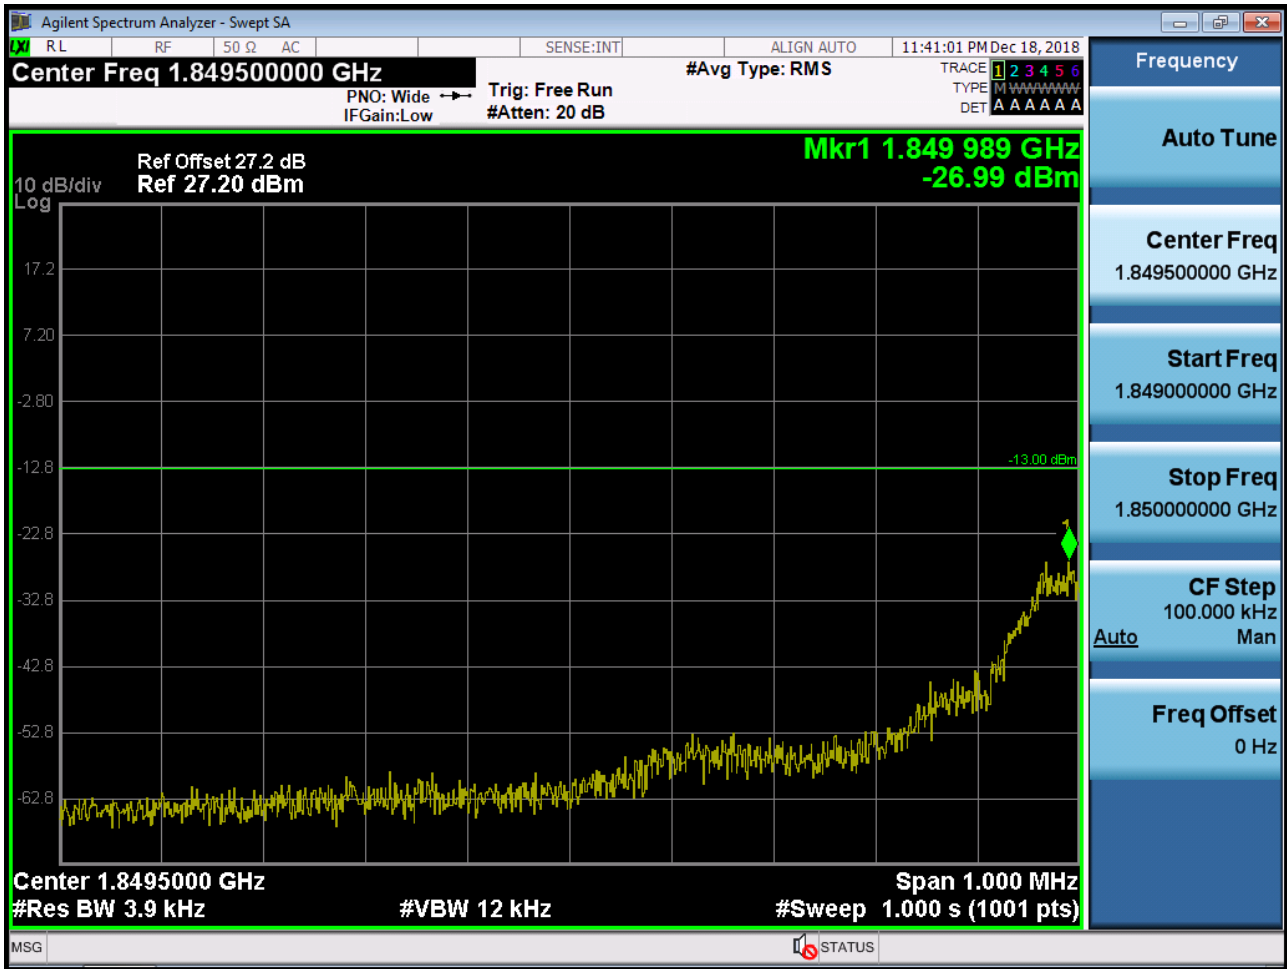




■ EDGE MODE (512 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value +  $10 \cdot \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -51.51 \text{ dBm} + 10 \text{ dB} = -41.51 \text{ dBm}$

■ EDGE MODE (810 CH.) Block Edge 1

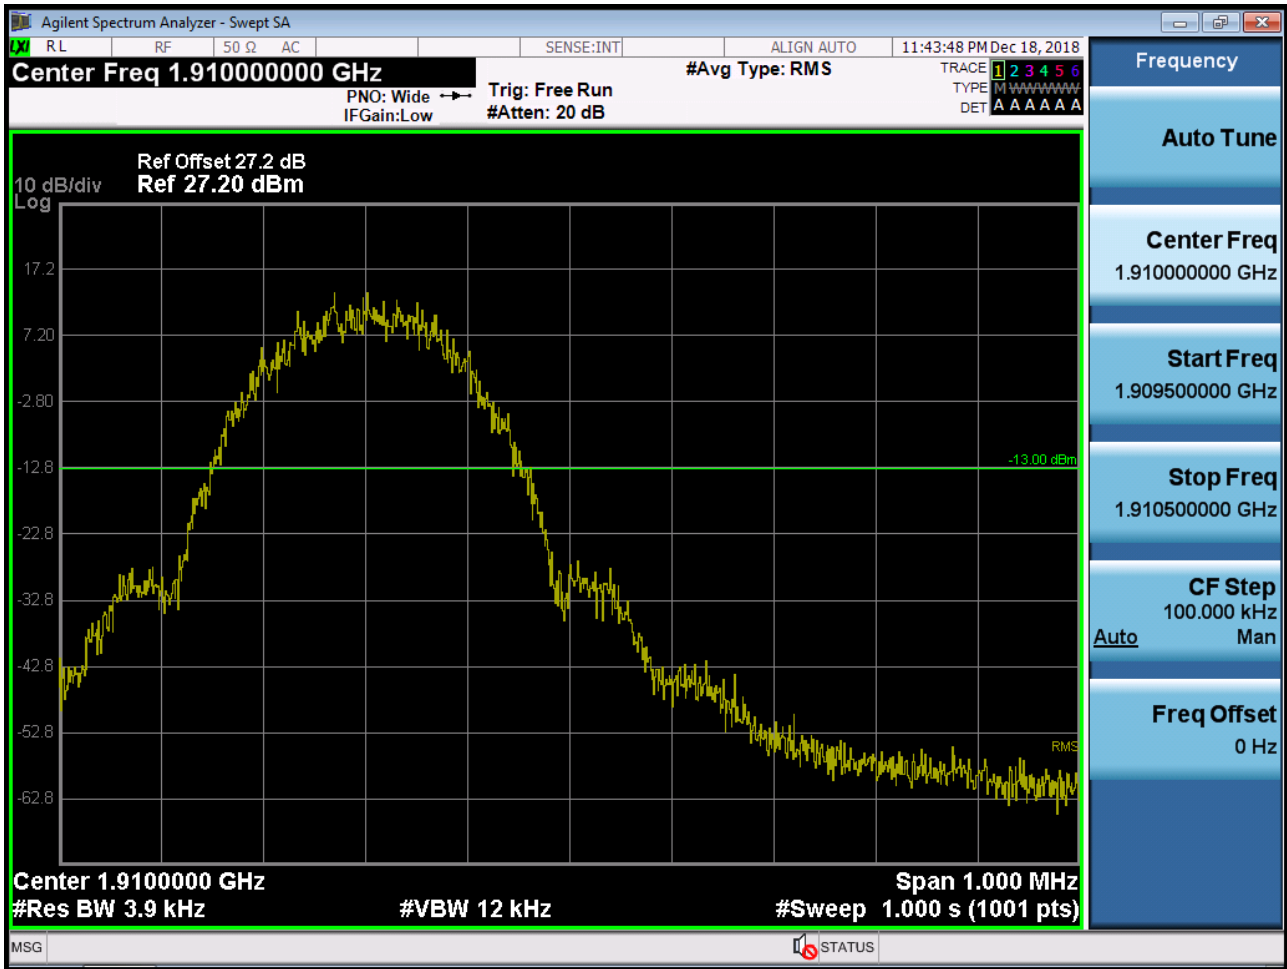

■ EDGE MODE (810 CH.) Block Edge 2

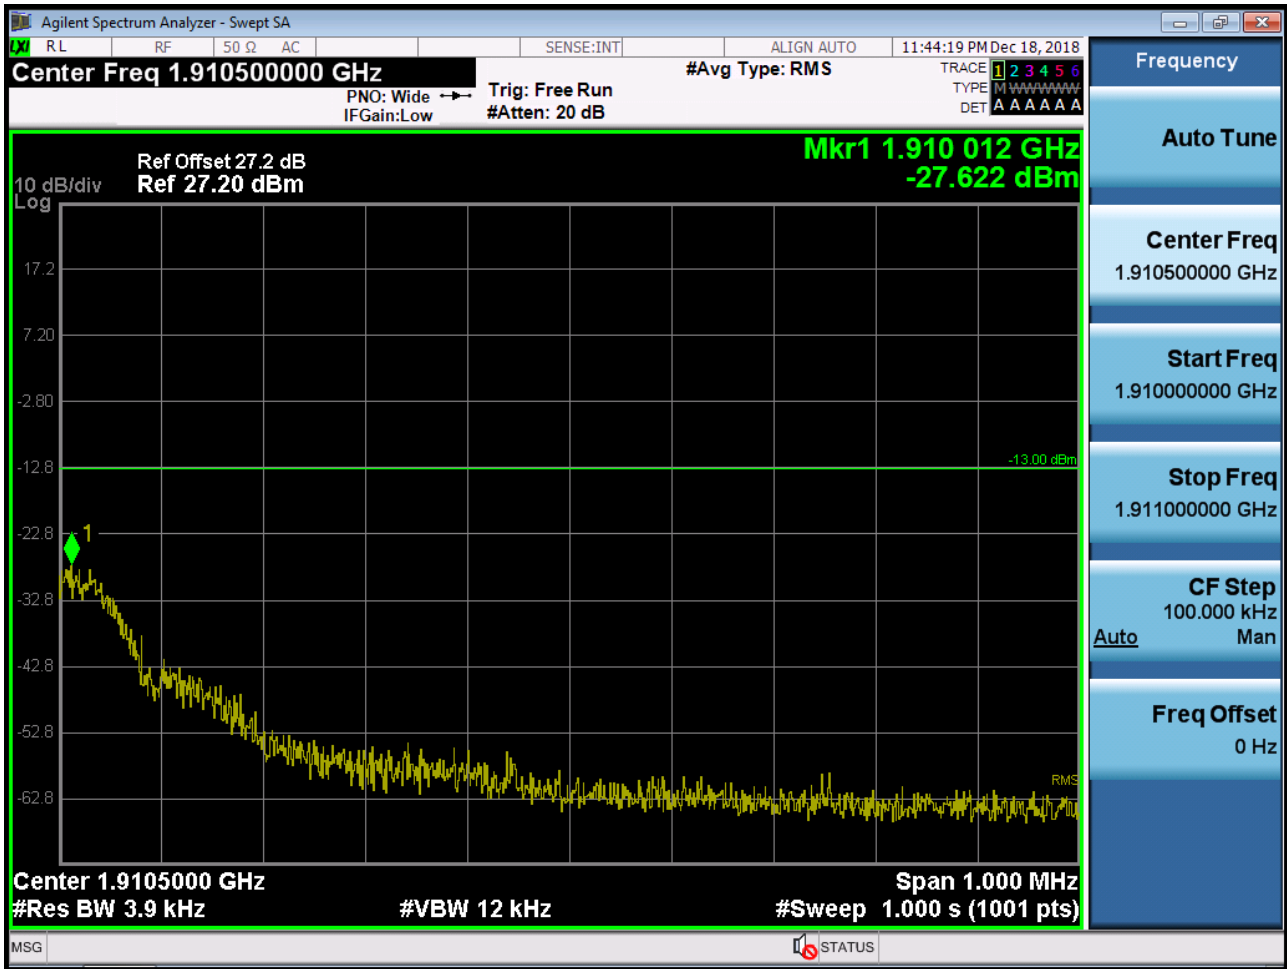

■ EDGE MODE (810 CH.) Block Edge 3



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10\*log(1 MHz/100 kHz) dB = -51.079 dBm + 10 dB = **-41.079 dBm**

■ WCDMA850 MODE (4132 CH.) Block Edge



■ WCDMA850 MODE (4132 CH.) – 4 MHz Span



■ WCDMA850MODE (4233 CH.) Block Edge



■ WCDMA850MODE (4233 CH.) – 4 MHz Span





■ WCDMA1900 MODE (9262 CH.) Block Edge



■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span




■ WCDMA1900 MODE (9538 CH.) Block Edge




■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span




■ GSM850 MODE (128 CH.) Conducted Spurious Emissions

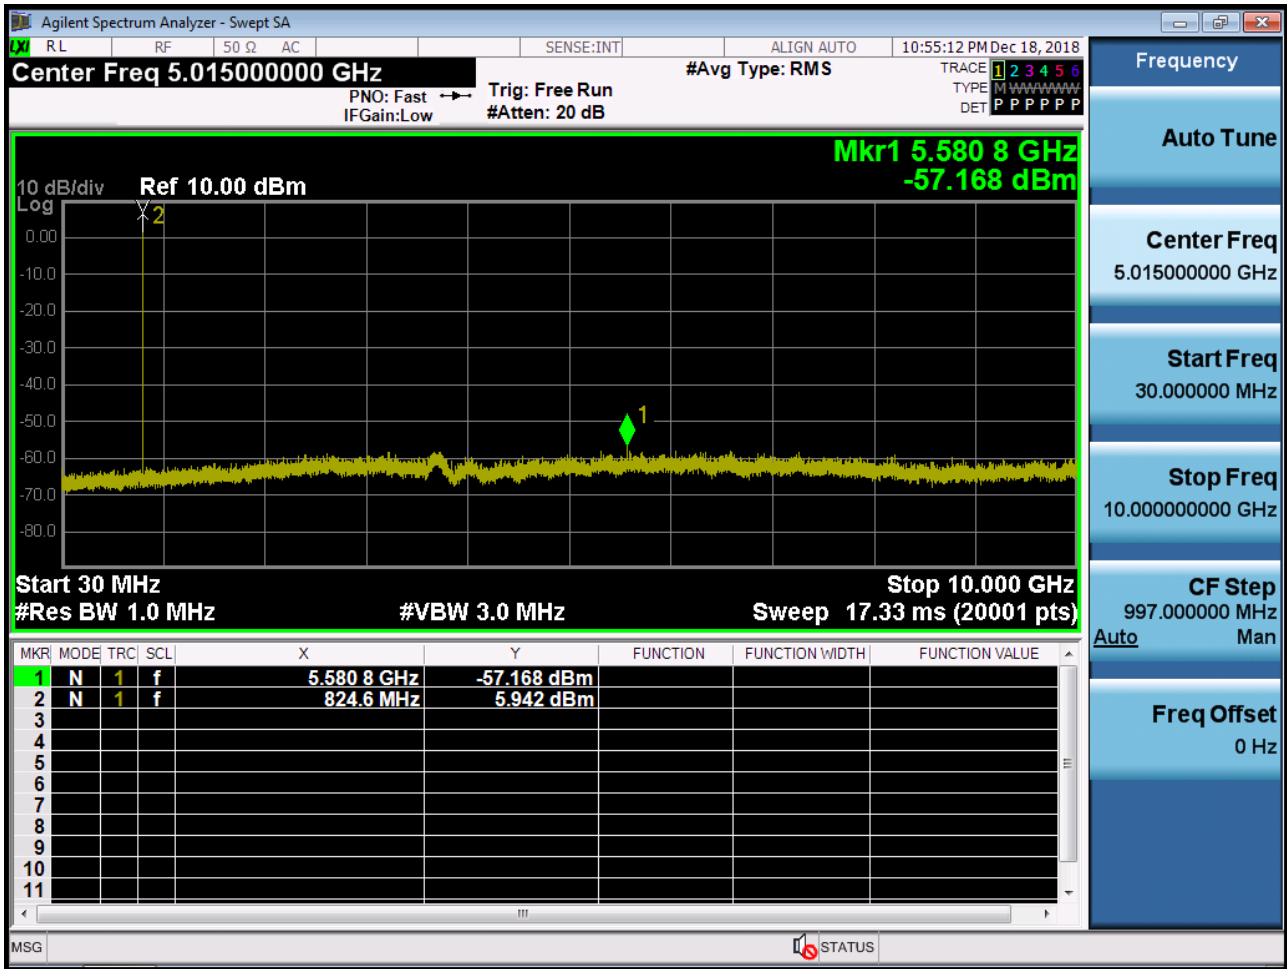


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions

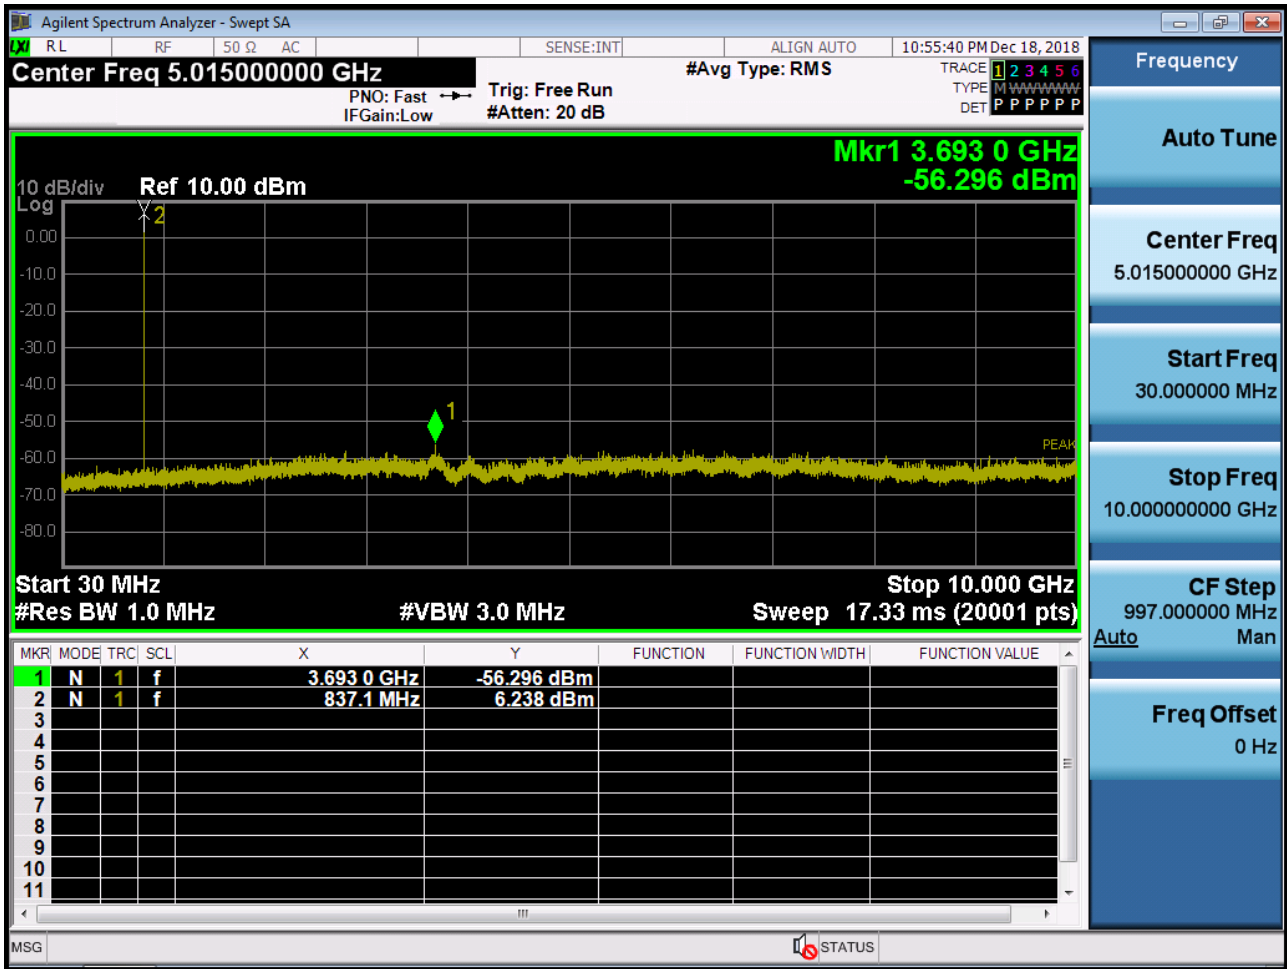

■ GSM850 MODE (251 CH.) Conducted Spurious Emissions

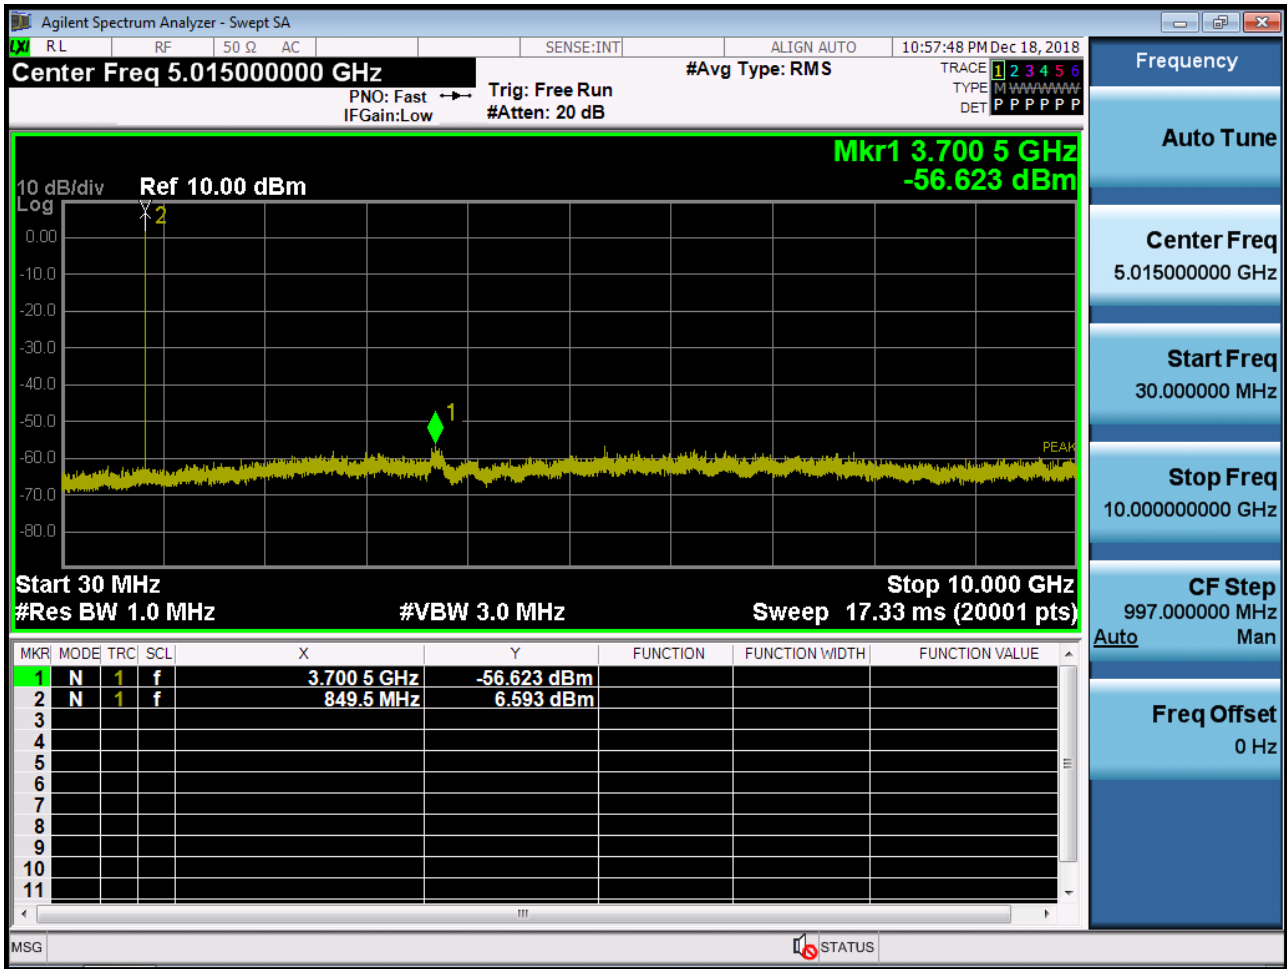


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

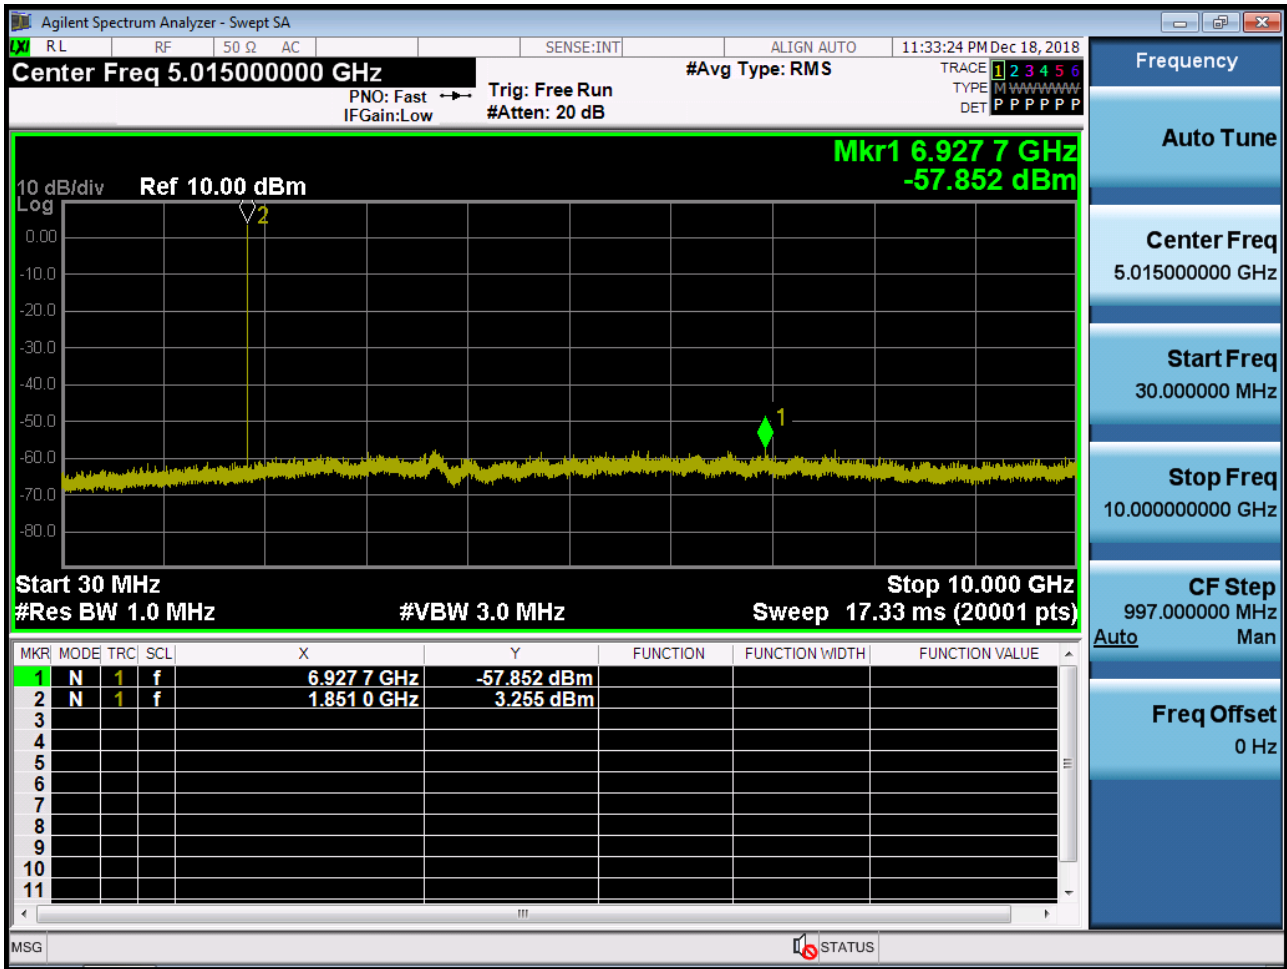





■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

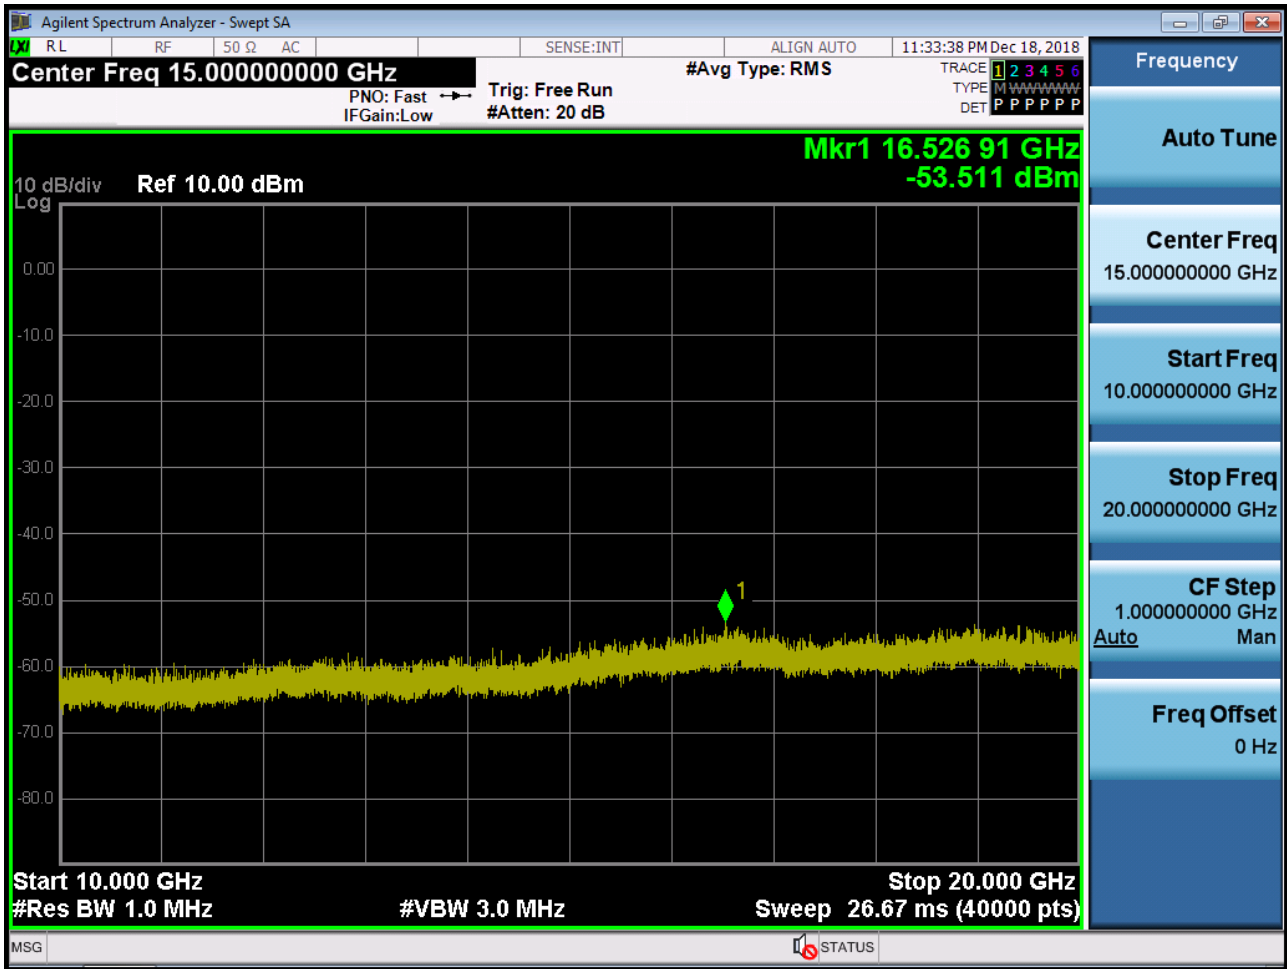


■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

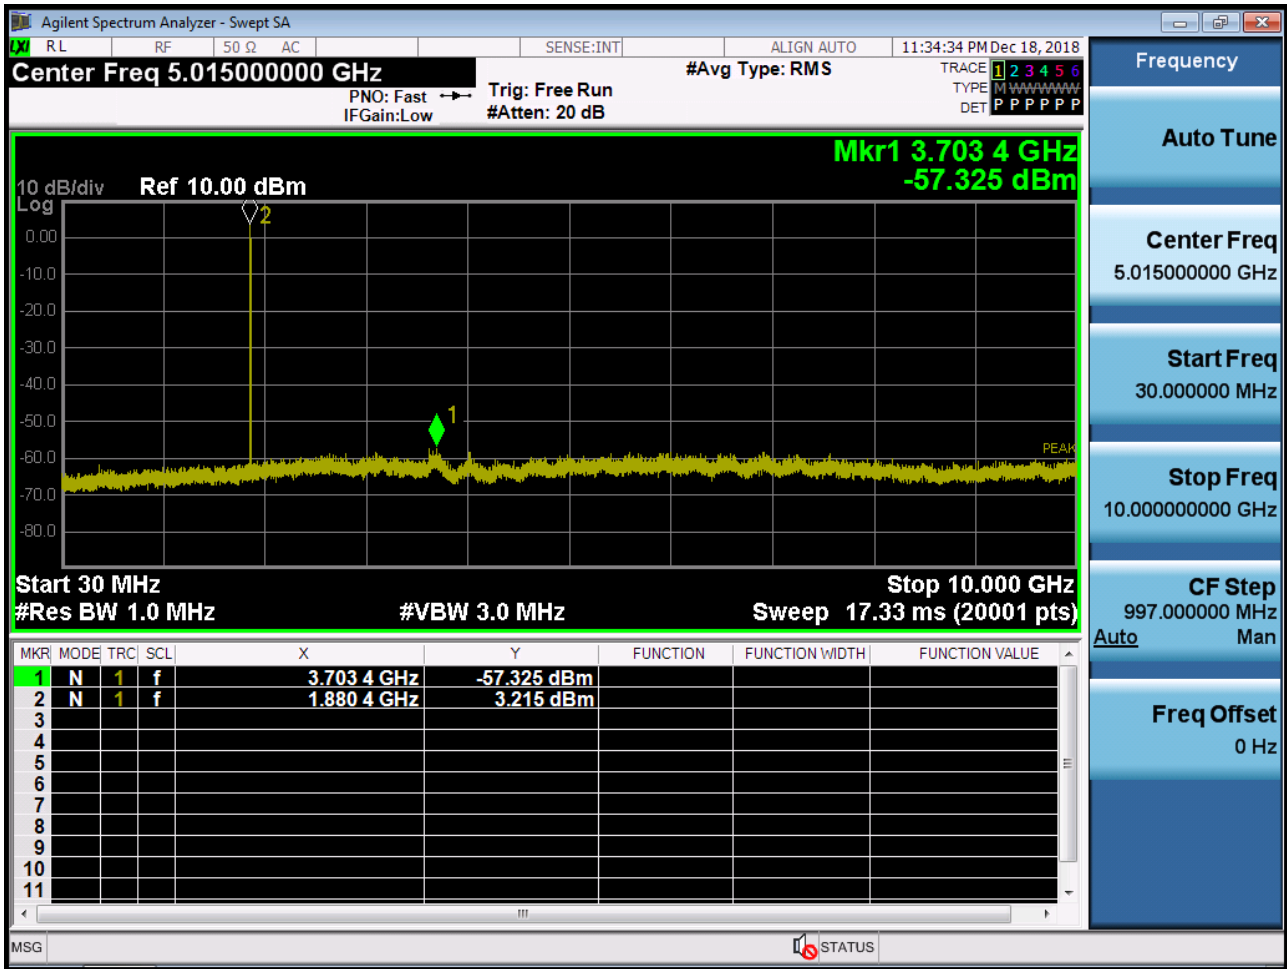


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

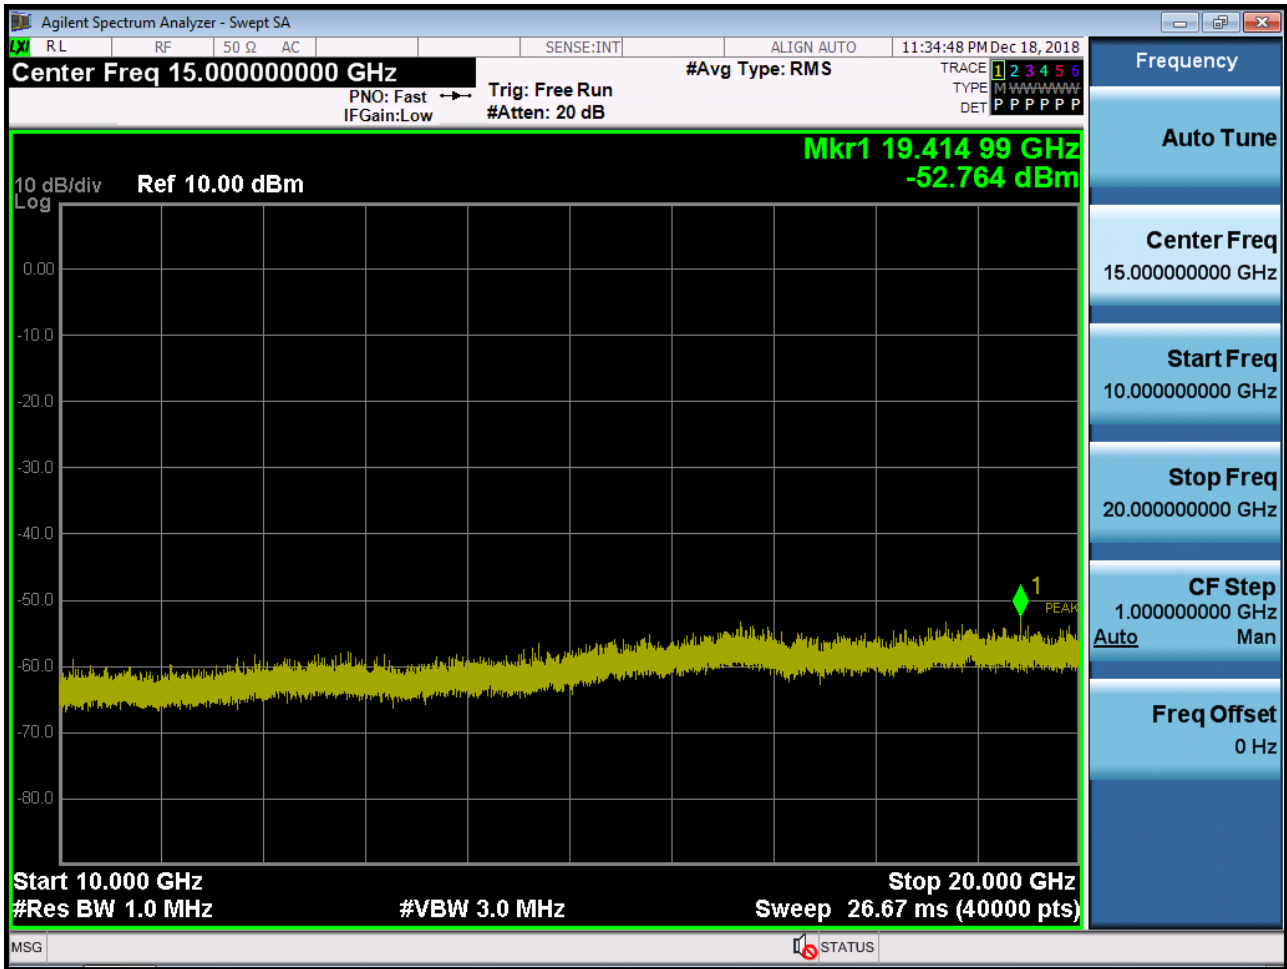


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

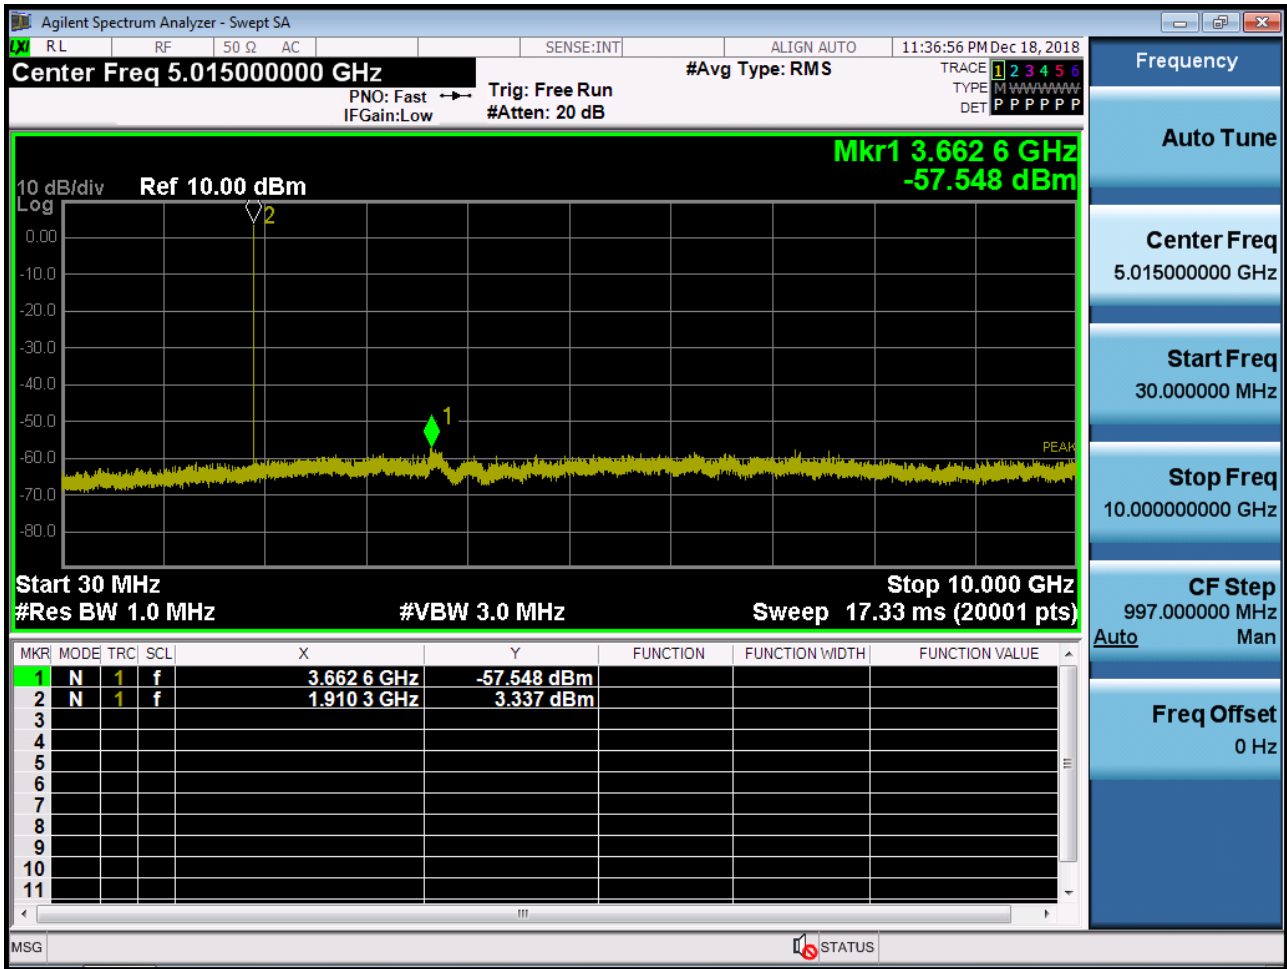


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

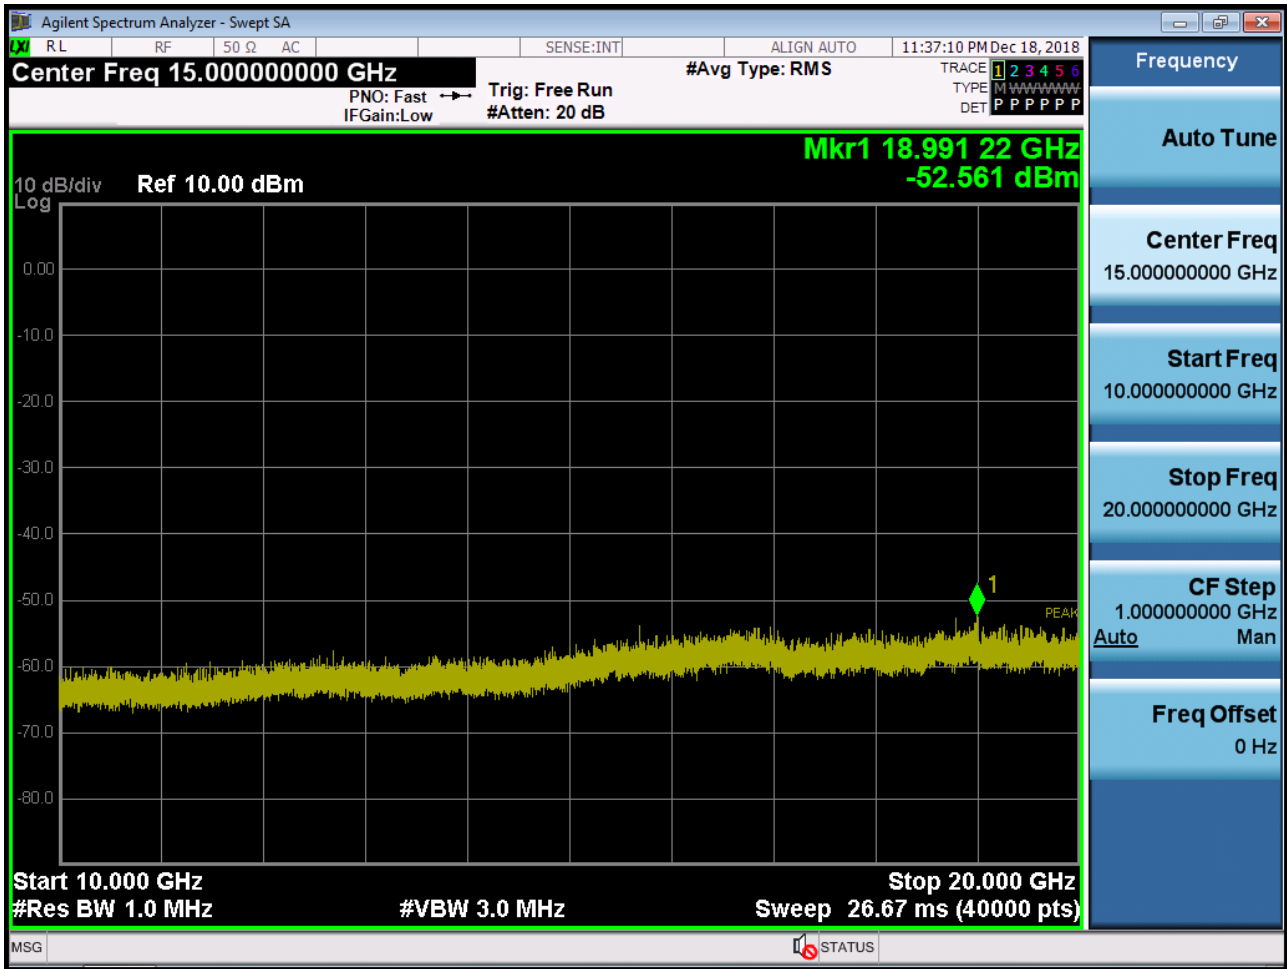


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

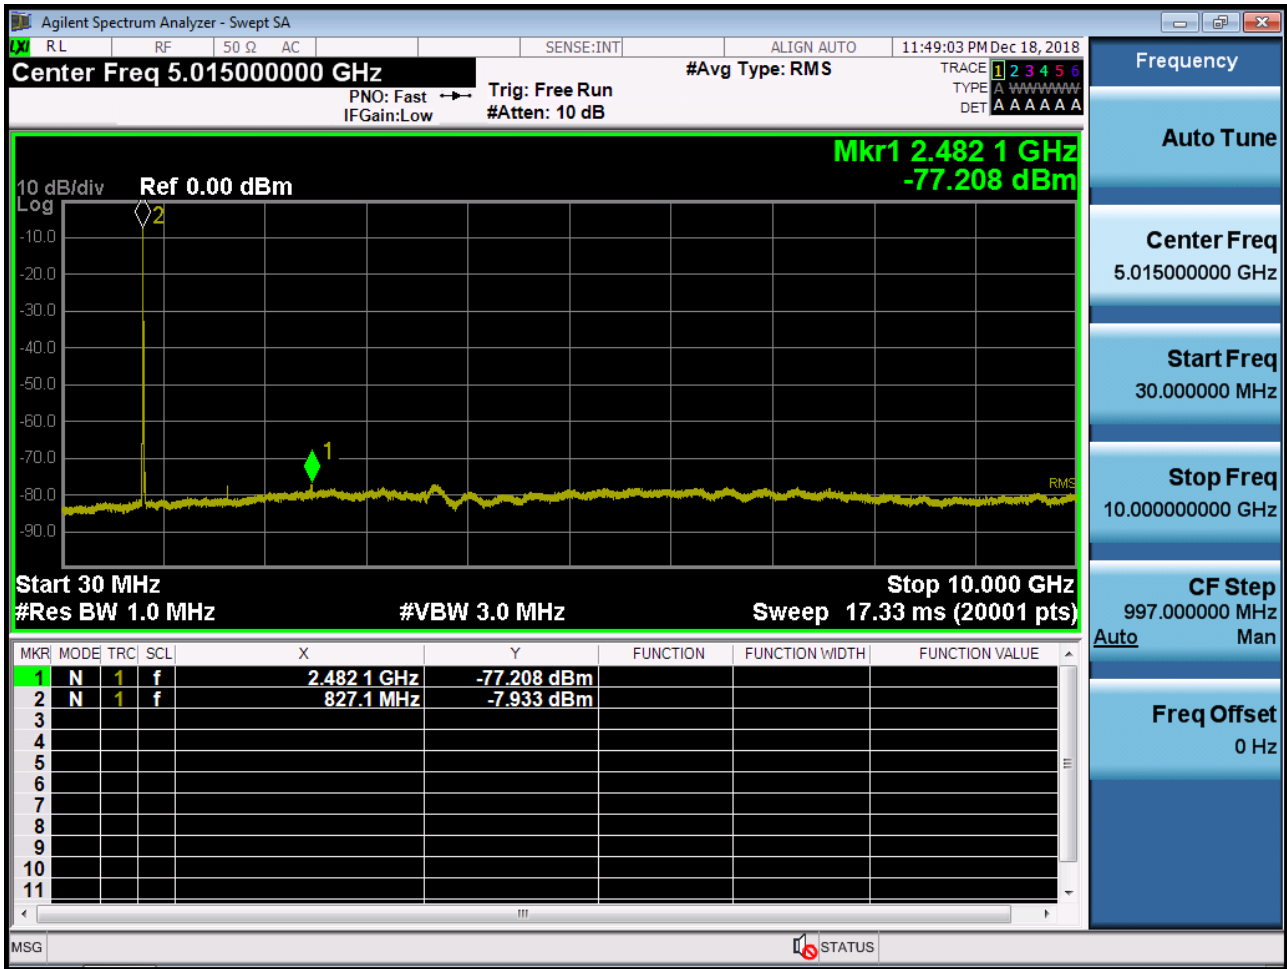

■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

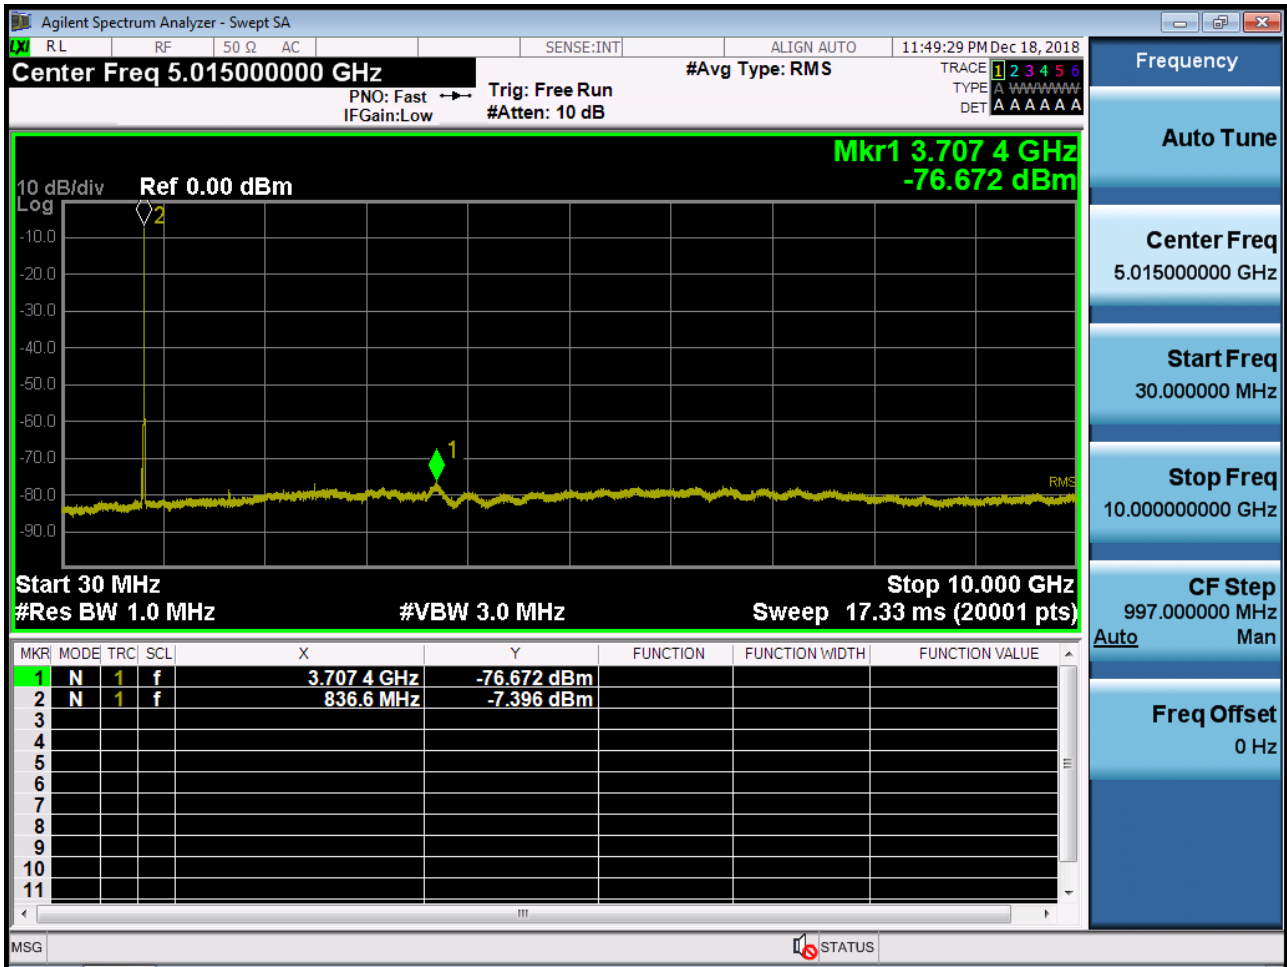


■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions

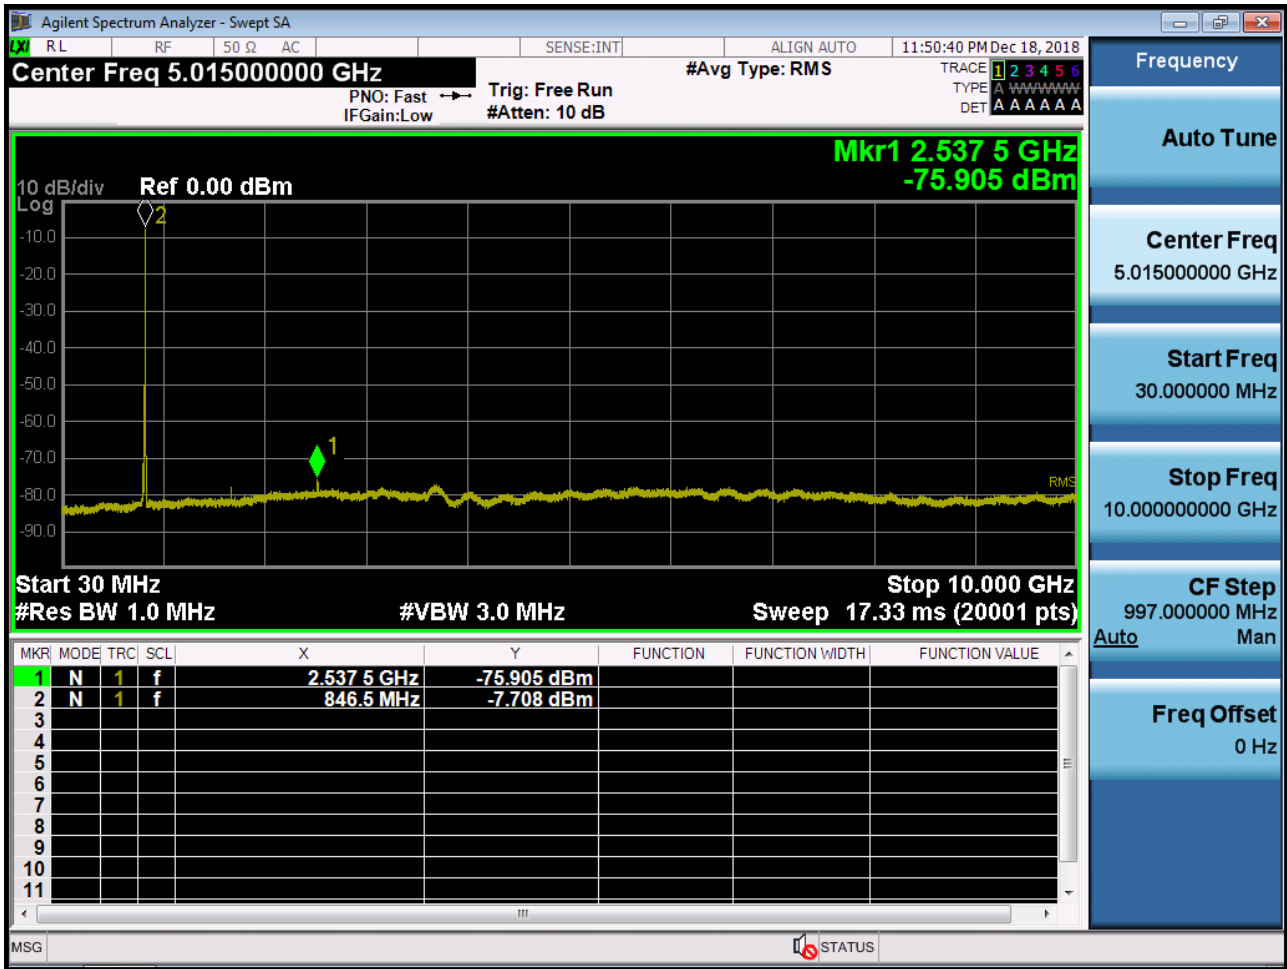




■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

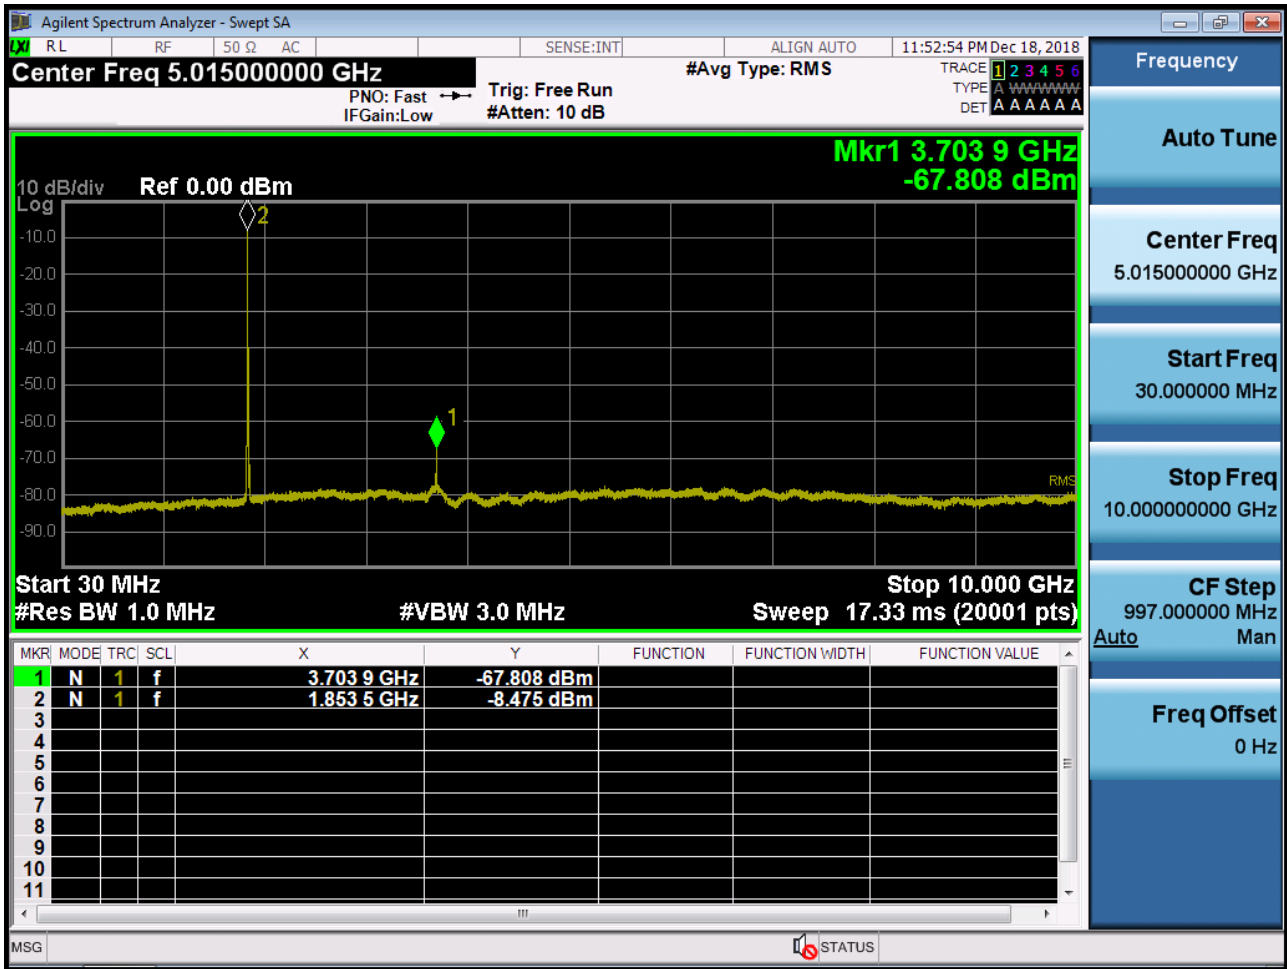

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2




■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

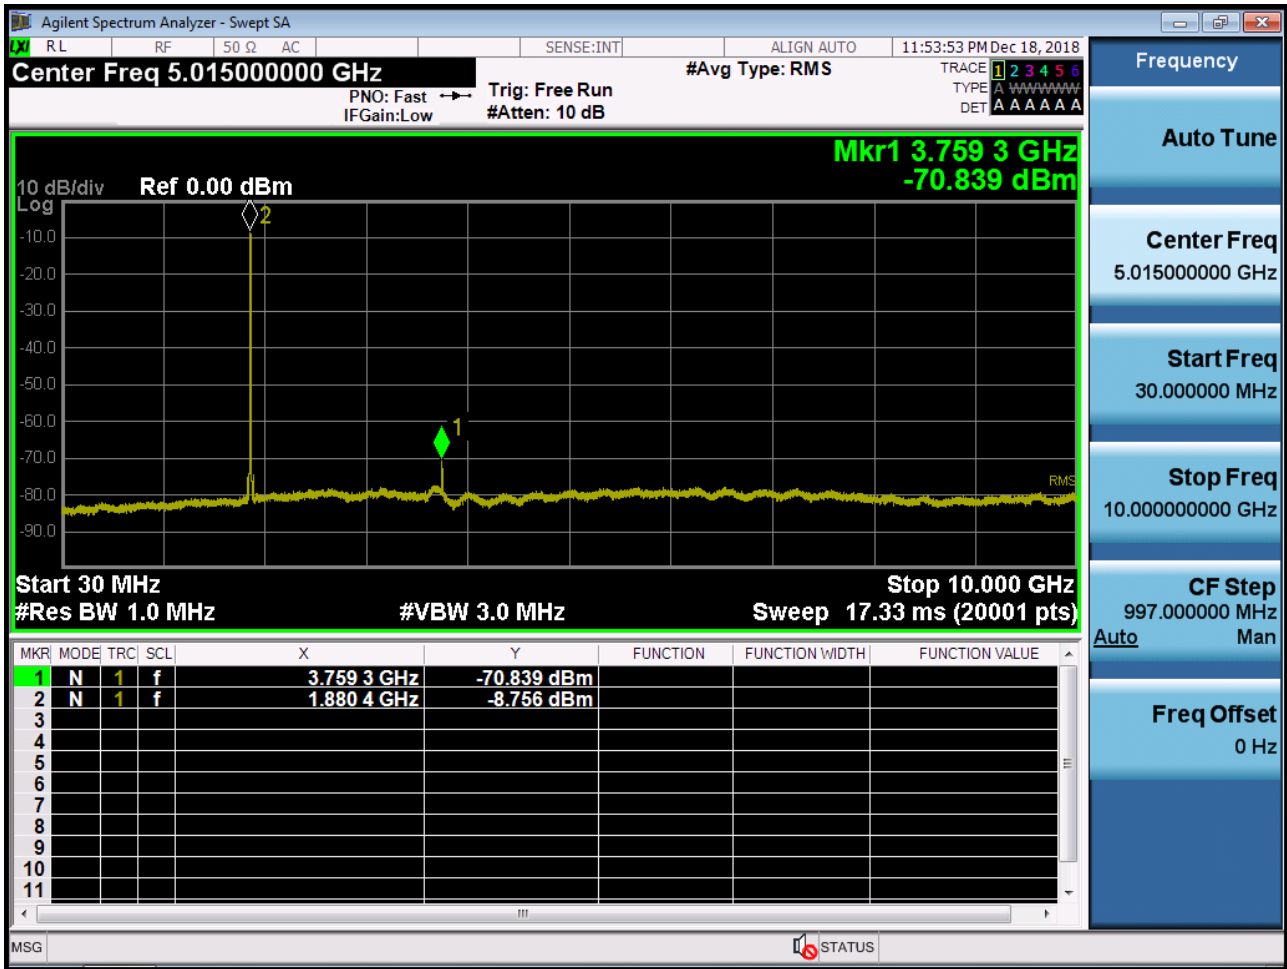


■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2



■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

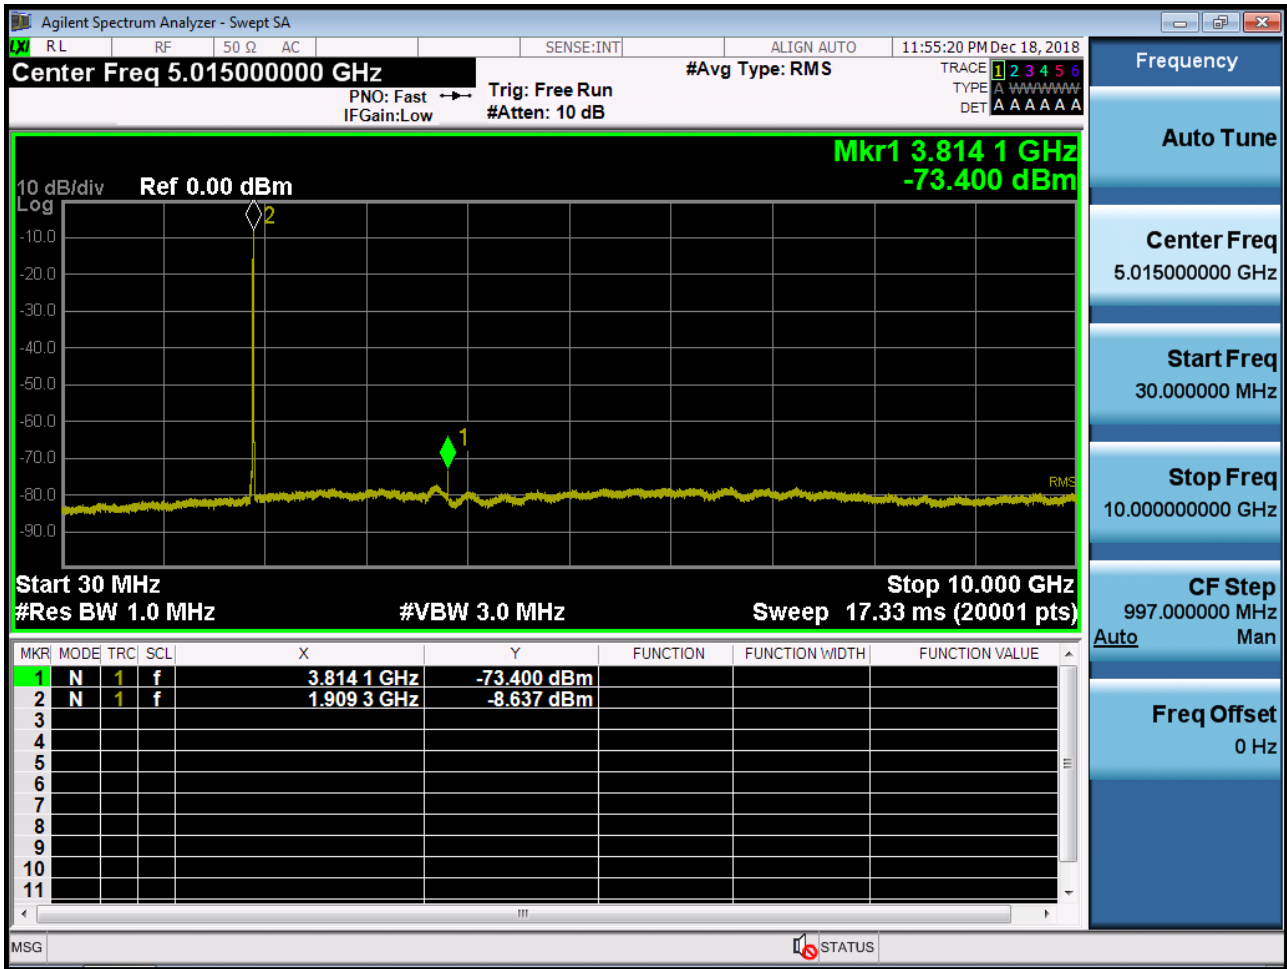

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2

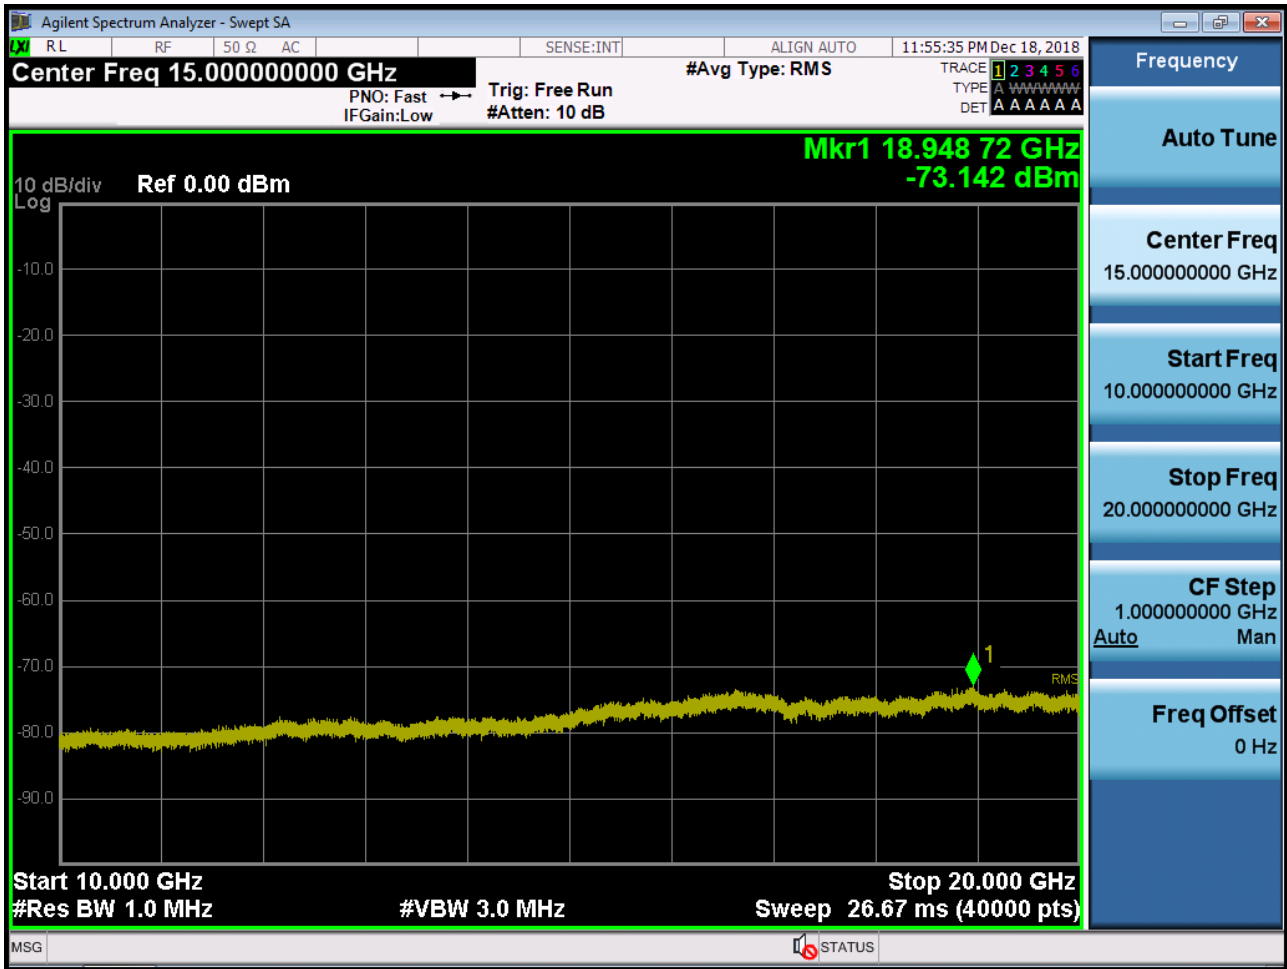

## 10. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1812-FC043-P
2	HCT-RF-1812-FC044-P
3	HCT-RF-1812-FC045-P