

FCC NFC REPORT

Certification

Date of Issue:

January 14, 2019

Location:

HCT CO., LTD.,

74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-1901-FC004-R1

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Address:

129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

FCC ID: A3LSMM205FN

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model: SM-M205FN/DS

EUT Type: Mobile Phone

RF Output Field Strength: 16.77 dBuV/m @30 m

Frequency of Operation: 13.5598 MHz

Modulation type: ASK

FCC Classification: Low Power Communication Device – Transmitter

FCC Rule Part(s): FCC Part 15.225 Subpart C

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



Report prepared by : Se Wook Park
Engineer of Telecommunication testing center



Approved by : Jong Seok Lee
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1901-FC004	January 04, 2019	- First Approval Report
HCT-RF-1901-FC004-R1	January 14, 2019	- Added the Unterminated Powerline conducted Emission in Sec.9.6

Table of Contents

1. EUT DESCRIPTION	4
2. TEST METHODOLOGY	5
EUT CONFIGURATION	5
EUT EXERCISE	5
GENERAL TEST PROCEDURES	5
DESCRIPTION OF TEST MODES	5
3. INSTRUMENT CALIBRATION.....	6
4. FACILITIES AND ACCREDITATIONS	6
FACILITIES	6
EQUIPMENT	6
5. ANTENNA REQUIREMENTS	6
6. MEASUREMENT UNCERTAINTY	7
7. DESCRIPTION OF TESTS	8
8. TEST SUMMARY	16
9. TEST RESULT	17
9.1. Operation within the band 13.110 MHz – 14.010 MHz.....	17
9.2. Radiated Emission 9 kHz – 30 MHz	19
9.3. Radiated Emission 30 MHz – 1000 MHz	20
9.4. 20 dB Bandwidth	21
9.5. Frequency Stability	22
9.6. POWERLINE CONDUCTED EMISSIONS	26
10. LIST OF TEST EQUIPMENT	34
11. ANNEX A_ TEST SETUP PHOTO	36

1. EUT DESCRIPTION

Model	SM-M205FN/DS
EUT Type	Mobile Phone
Power Supply	DC 3.85 V
Battery Information	Model: EB-BG580ABN Type: Li-ion Battery
Travel Adapter Information	Model: EP-TA200 Manufacture: SOLUM
Frequency of Operation	13.5598 MHz
Transmit Power	16.77 dBuV/m @30 m
Modulation Type	ASK
Antenna Type	FPCB Antenna
Date(s) of Tests	December 05, 2018 ~ January 04, 2019

2. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10. (Version: 2013).

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

7. DESCRIPTION OF TESTS

7.1. Radiated Test

Limit (Operation within the band 13.110 MHz – 14.010 MHz)

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
13.553 – 13.567	15,848	30
13.410 ≤ f ≤ 13.553 13.567 ≤ f ≤ 13.710	334	30
13.110 ≤ f ≤ 13.410 13.710 ≤ f ≤ 14.010	106	30

Note:

1. 15,848 uV/m = 84.0 dBuV/m
2. 334 uV/m = 50.47 dBuV/m
3. 106 uV/m = 40.51 dBuV/m

Limit (Radiated Spurious Emissions)


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	**100	3
88-216	**150	3
216-960	**200	3
Above 960	500	3

**:


Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Test Configuration

Below 30 MHz

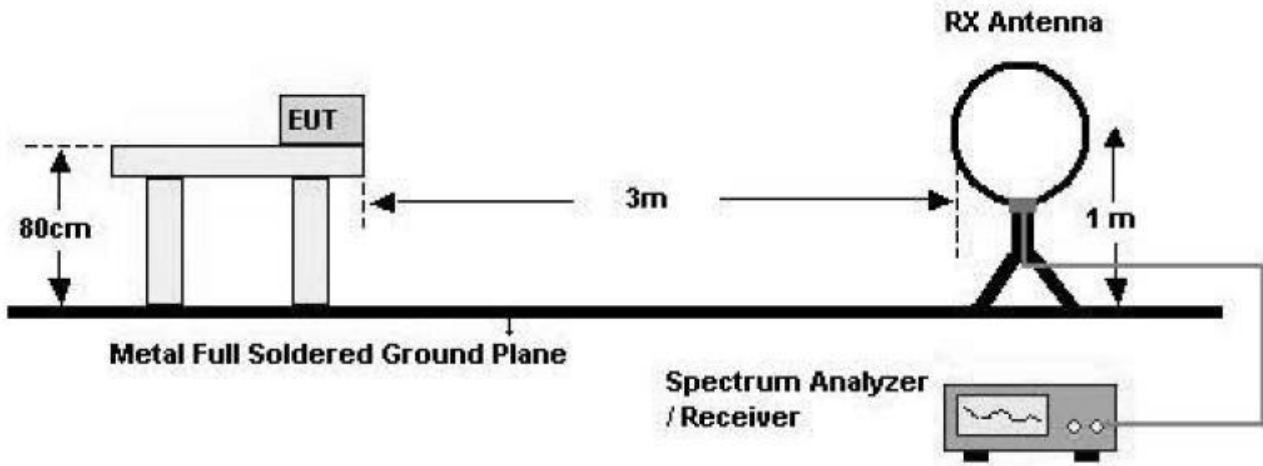

30 MHz - 1 GHz

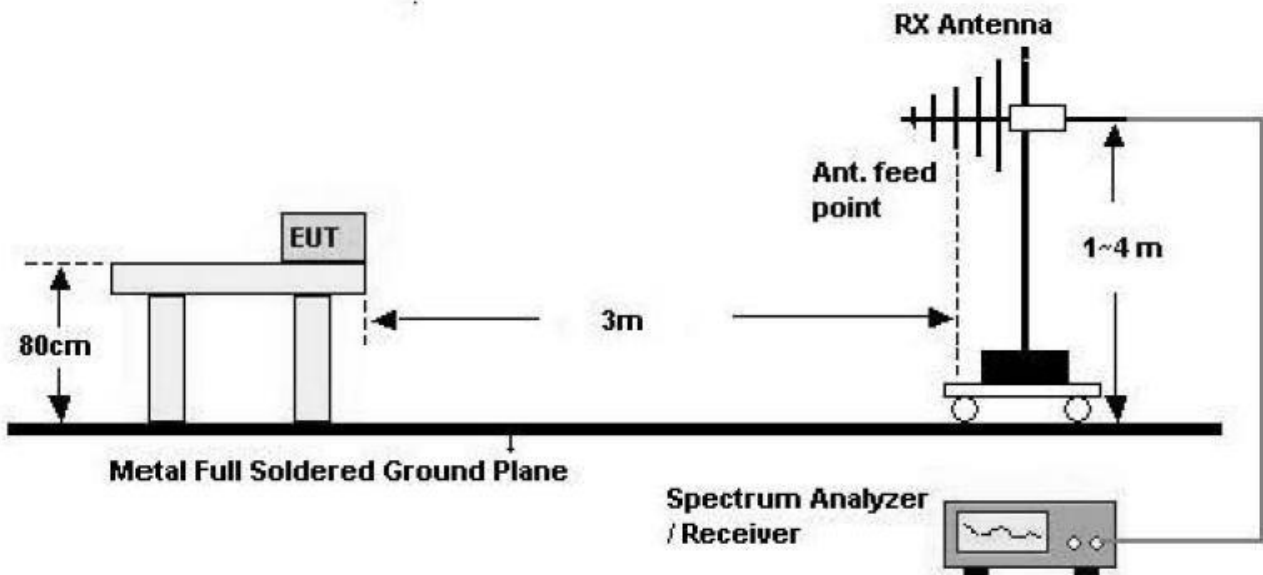

Above 1 GHz

Test Procedure of inband

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$

Measurement Distance : 3 m (Below 30 MHz)

7. Spectrum Setting

- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW $\geq 3 \cdot \text{RBW}$

8. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
9. The test results for below 30 MHz is correlated to an open site.

The result on OATS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$

Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW $\geq 3 \cdot \text{RBW}$

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. The test results for below 30 MHz is correlated to an open site.


The result on OATS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Test Procedure of Radiated spurious emissions(Above 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
 - Frequency Range = 30 MHz ~ 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3*RBW
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

7.2. 20dB Bandwidth

Test Configuration

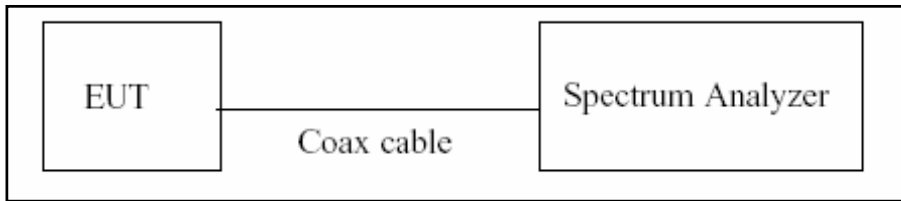

Test Procedure

The 20 dB bandwidth was measured by using a spectrum analyzer.

- 1) RBW = Auto
- 2) VBW = Auto
- 3) Span = Adequately in the operating Tx.
- 4) Detector = Peak
- 5) Trace mode = Max hold
- 6) Allow the trace to stabilize

Note :


We tested Occupied Bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Frequency Stability

Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

Test Configuration

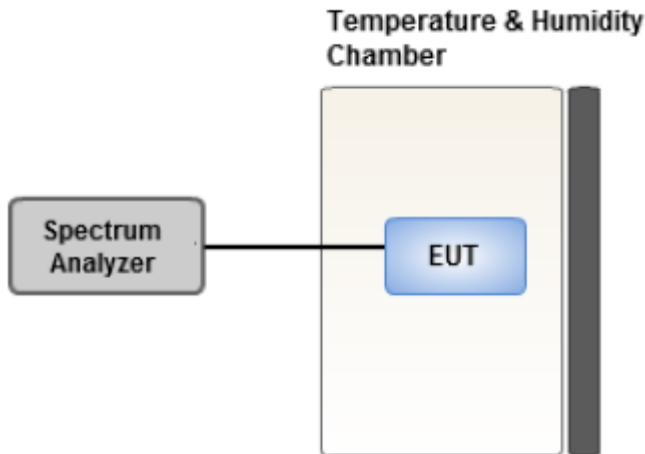

Test Procedure.

For battery operated equipment, the equipment tests shall be performed using a new battery.

- 1) Turn the EUT OFF and place it inside the environmental temperature chamber.
For devices that have oscillator heaters, energize only the heater circuit.
- 2) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- 3) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- 4) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.
- 5) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

Note:

- 1) Temperature:
The temperature is varied from -20°C to $+50^{\circ}\text{C}$ using an environmental chamber.
- 2) Primary Supply Voltage :
The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment.
For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

7.4. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.5. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + external accessories(earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis : Z-H
3. All type and bitrate were investigated and the worst case results are reported.
(Worst case : Type A, 106 kbps)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone+Earphone+Travel Adapter, Stand alone+Travel Adapter
 - Worstcase : Stand alone+Travel Adapter

20dB Bandwidth & Frequency Stability

1. All type and bitrate were investigated and the worst case results are reported.
(Worst case : Type A, 106 kbps)

8. TEST SUMMARY

Regulation	Requirement	Result
Part 15.225 (a)	Radiated Electric Field Emissions (13.553MHz to 13.567MHz)	Pass
Part 15.225 (b)	Radiated Electric Field Emissions ($13.410 \leq f \leq 13.553$, $13.567 \leq f \leq 13.710$)	Pass
Part 15.225 (c)	Radiated Electric Field Emissions ($13.110 \leq f \leq 13.410$, $13.710 \leq f \leq 14.010$)	Pass
Part 15.209	Radiated Electric Field Emissions (9kHz to 30MHz)	Pass
Part 15.209	Radiated Electric Field Emissions (30MHz to 1GHz)	Pass
Part 15.225 (e)	Frequency Stability	Pass
Part 15.207	AC power conducted emissions (150kHz to 30MHz)	Pass
Part 15.215 (c)	20 dB Bandwidth	Pass


9. TEST RESULT**9.1. Operation within the band 13.110 MHz – 14.010 MHz**

Measured Frequency Range : 13.553 MHz-13.567 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor +Cable Loss (dB/m)	Distance Correction (dB)	Total (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5598	37.23	19.54	-40	16.77	84	67.23
13.5600	32.77	19.54	-40	12.31	84	71.69

Measured Frequency Range : 13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor +Cable Loss (dB/m)	Distance Correction (dB)	Total (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5530	24.04	19.54	-40	3.58	50.47	46.89
13.5670	24.21	19.54	-40	3.75	50.47	46.72

Measured Frequency Range : 13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor +Cable Loss (dB/m)	Distance Correction (dB)	Total (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.3494	17.82	19.54	-40	-2.64	40.51	43.15
13.7716	19.04	19.54	-40	-1.42	40.51	41.93

Test Plot

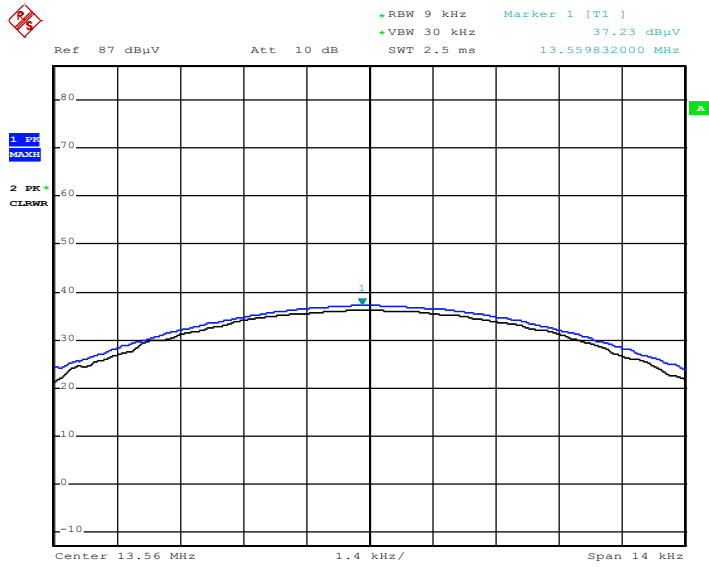

Date: 17.DEC.2018 14:10:11

Note:

Plot of worst case are only reported.

9.2. Radiated Emission 9 kHz – 30 MHz

Measured Frequency Range : 9 kHz - 30 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor +Cable Loss (dB/m)	Distance Correction (dB)	Total (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
9.3326	15.59	19.54	-40	-4.87	29.54	34.41
14.0163	11.12	19.54	-40	-9.34	29.54	38.88
27.5892	8.66	19.99	-40	-11.35	29.54	40.89
27.1493	8.52	19.99	-40	-11.49	29.54	41.03


9.3. Radiated Emission 30 MHz – 1000 MHz

Measured Frequency Range :							
30 MHz - 1000 MHz							
Frequency (MHz)	Read Level (dBuV/m) @3m	Ant.Factor (dB/m)	Cable Loss (dB)	Ant. Pol (H/V)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*37.8954	19.67	11.72	0.66	H	32.05	40.0	7.95
52.3126	18.86	12.38	0.7	H	31.94	40.0	8.06
106.23	17.21	9.27	0.78	V	27.26	43.5	16.24
*120.8651	18.61	11.64	0.81	H	31.06	43.5	12.44
*131.6843	17.69	12.84	0.88	H	31.41	43.5	12.09
176.5564	17.60	13.41	0.95	V	31.96	43.5	11.54

Note:

- '*' is the result for restricted band.

Test Plot

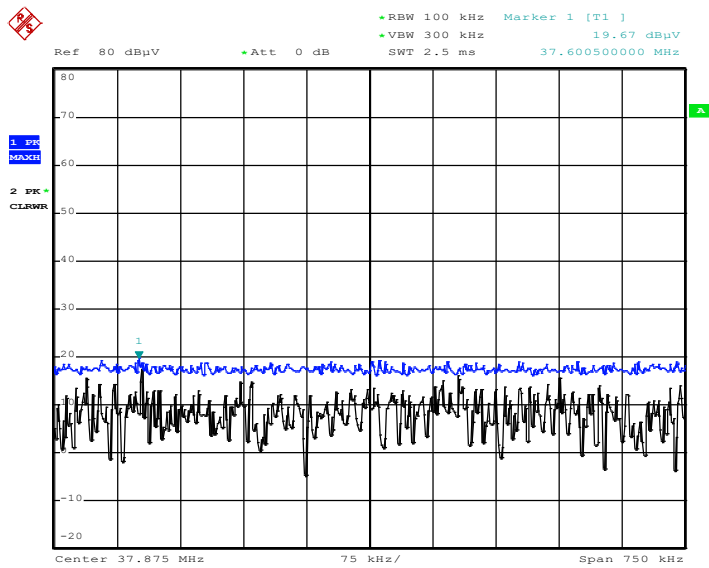


Date: 17.DEC.2018 15:05:47

Note:

Plot of worst case are only reported

9.4. 20 dB Bandwidth

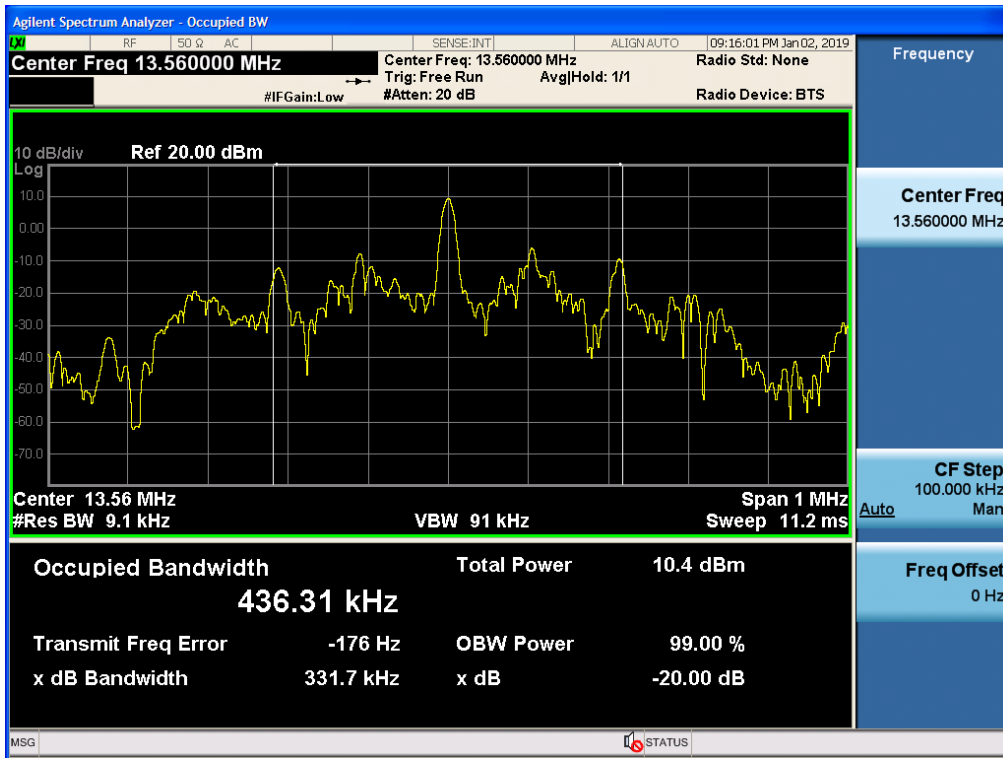

9.5. Frequency Stability

Startup

OPERATING FREQUENCY: 13.56 MHzREFERENCE VOLTAGE: 3.85 VDCDEVIATION LIMIT: 0.01 % = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560008	8	0.0000599
100%		-10	13.560083	83	0.0006143
100%		0	13.560054	54	0.0003996
100%		+10	13.560028	28	0.0002038
100%		+20(Ref.)	13.560021	21	0.0001567
100%		+30	13.560063	63	0.0004682
100%		+40	13.560025	25	0.0001868
100%		+50	13.560030	30	0.0002215
High		4.4	+20	13.560083	83
End. Point	3.6	+20	13.560005	5	0.0000361

2 minutesOPERATING FREQUENCY: 13.56 MHzREFERENCE VOLTAGE: 3.85 VDCDEVIATION LIMIT: 0.01 % = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560045	45	0.0003353
100%		-10	13.560040	40	0.0002951
100%		0	13.560004	4	0.0000322
100%		+10	13.560084	84	0.0006206
100%		+20(Ref.)	13.560073	73	0.0005402
100%		+30	13.560039	39	0.0002889
100%		+40	13.560032	32	0.0002386
100%		+50	13.560002	2	0.0000123
High	4.4	+20	13.560061	61	0.0004530
End. Point	3.6	+20	13.560033	33	0.0002413

5 minutesOPERATING FREQUENCY: 13.56 MHzREFERENCE VOLTAGE: 3.85 VDCDEVIATION LIMIT: 0.01 % = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560065	65	0.0004822
100%		-10	13.560095	95	0.0007038
100%		0	13.560040	40	0.0002984
100%		+10	13.560099	99	0.0007307
100%		+20(Ref.)	13.560032	32	0.0002359
100%		+30	13.560075	75	0.0005555
100%		+40	13.560060	60	0.0004429
100%		+50	13.560040	40	0.0002980
High		4.4	+20	13.560084	84
End. Point	3.6	+20	13.560046	46	0.0003375

10 minutes

PERATING FREQUENCY: 13.56 MHz

REFERENCE VOLTAGE: 3.85 VDC

DEVIATION LIMIT: 0.01 % = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560093	93	0.0006863
100%		-10	13.560010	10	0.0000728
100%		0	13.560070	70	0.0005139
100%		+10	13.560095	95	0.0007020
100%		+20(Ref.)	13.560026	26	0.0001897
100%		+30	13.560047	47	0.0003445
100%		+40	13.560020	20	0.0001467
100%		+50	13.560044	44	0.0003264
High	4.4	+20	13.560045	45	0.0003308
End. Point	3.6	+20	13.560014	14	0.0001039

9.6. POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1) (Terminated)

Test


1/2

HCT TEST Report

Common Information

EUT: SM-M205FN/DS
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC_L1(Terminated)

FCC CLASS B_Exten Cable

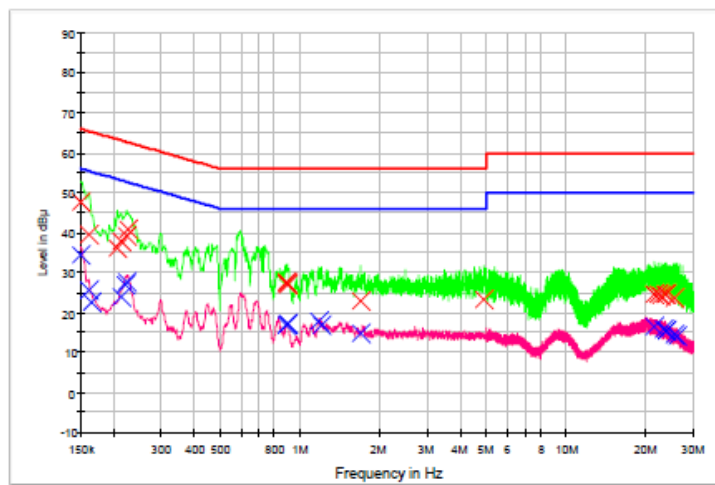

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
— Preview Result 2-AVG x Final Result 1-QPK x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	47.7	9.000	Off	L1	9.7	18.3	66.0
0.160000	39.5	9.000	Off	L1	9.7	25.9	65.5
0.206000	36.3	9.000	Off	L1	9.7	27.1	63.4
0.214000	37.7	9.000	Off	L1	9.7	25.3	63.0
0.222000	39.2	9.000	Off	L1	9.7	23.5	62.7
0.226000	40.8	9.000	Off	L1	9.7	21.8	62.6
0.886000	27.4	9.000	Off	L1	9.8	28.6	56.0
0.890000	27.7	9.000	Off	L1	9.8	28.3	56.0
0.894000	27.3	9.000	Off	L1	9.8	28.7	56.0
0.898000	26.8	9.000	Off	L1	9.8	29.2	56.0
1.684000	22.9	9.000	Off	L1	9.9	33.1	56.0
4.886000	23.2	9.000	Off	L1	10.0	32.8	56.0
21.302000	24.5	9.000	Off	L1	10.6	35.5	60.0
22.226000	24.6	9.000	Off	L1	10.7	35.4	60.0
22.648000	24.4	9.000	Off	L1	10.7	35.6	60.0
23.430000	24.5	9.000	Off	L1	10.7	35.5	60.0
23.746000	24.5	9.000	Off	L1	10.7	35.5	60.0
25.608000	23.7	9.000	Off	L1	10.8	36.3	60.0

2018-12-17

오후 9:15:26

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	34.4	9.000	Off	L1	9.7	21.6	56.0
0.160000	25.6	9.000	Off	L1	9.7	29.8	55.5
0.164000	22.5	9.000	Off	L1	9.7	32.7	55.3
0.214000	24.0	9.000	Off	L1	9.7	29.0	53.0
0.220000	26.8	9.000	Off	L1	9.7	26.0	52.8
0.224000	27.7	9.000	Off	L1	9.7	25.0	52.7
0.886000	16.7	9.000	Off	L1	9.8	29.3	46.0
0.894000	17.1	9.000	Off	L1	9.8	28.9	46.0
0.898000	17.0	9.000	Off	L1	9.8	29.0	46.0
1.182000	17.8	9.000	Off	L1	9.8	28.2	46.0
1.206000	16.9	9.000	Off	L1	9.8	29.1	46.0
1.684000	14.6	9.000	Off	L1	9.9	31.4	46.0
21.302000	16.5	9.000	Off	L1	10.6	33.5	50.0
23.140000	15.8	9.000	Off	L1	10.7	34.2	50.0
23.746000	15.5	9.000	Off	L1	10.7	34.5	50.0
23.770000	15.4	9.000	Off	L1	10.7	34.6	50.0
25.608000	14.4	9.000	Off	L1	10.8	35.6	50.0
26.000000	14.2	9.000	Off	L1	10.8	35.8	50.0

2018-12-17

오후 9:15:26

Conducted Emissions (Line 2) (Terminated)

Test


1 / 2

HCT TEST Report

Common Information

EUT: SM-M205FN/DS
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC_N(Terminated)

FCC CLASS B_Exten Cable

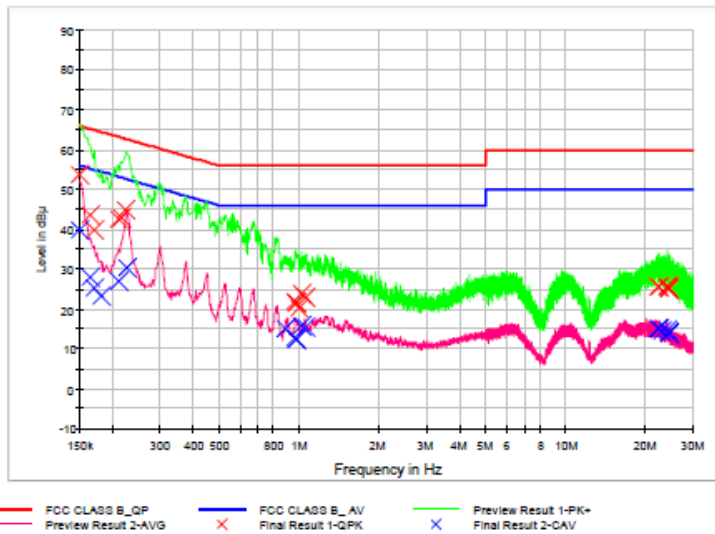

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	53.8	9.000	Off	N	9.8	12.2	66.0
0.164000	43.4	9.000	Off	N	9.8	21.9	65.3
0.170000	39.9	9.000	Off	N	9.8	25.0	65.0
0.210000	42.4	9.000	Off	N	9.9	20.8	63.2
0.216000	42.8	9.000	Off	N	9.9	20.2	63.0
0.224000	44.9	9.000	Off	N	9.9	17.8	62.7
0.964000	21.8	9.000	Off	N	10.0	34.2	56.0
0.972000	21.7	9.000	Off	N	10.0	34.4	56.0
0.976000	21.5	9.000	Off	N	10.0	34.5	56.0
0.992000	20.1	9.000	Off	N	10.0	35.9	56.0
1.018000	23.9	9.000	Off	N	10.0	32.1	56.0
1.052000	22.9	9.000	Off	N	10.0	33.1	56.0
22.252000	25.5	9.000	Off	N	10.9	34.5	60.0
22.360000	25.5	9.000	Off	N	10.9	34.5	60.0
23.890000	25.5	9.000	Off	N	11.0	34.5	60.0
23.914000	25.5	9.000	Off	N	11.0	34.5	60.0
24.218000	25.3	9.000	Off	N	11.0	34.7	60.0
24.308000	25.0	9.000	Off	N	11.0	35.0	60.0

2018-12-17

오후 9:06:32

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	39.7	9.000	Off	N	9.8	16.3	56.0
0.164000	27.8	9.000	Off	N	9.8	27.4	55.3
0.170000	25.4	9.000	Off	N	9.8	29.5	55.0
0.180000	23.2	9.000	Off	N	9.8	31.2	54.5
0.210000	26.9	9.000	Off	N	9.9	26.3	53.2
0.226000	30.5	9.000	Off	N	9.9	22.1	52.6
0.892000	15.1	9.000	Off	N	10.0	30.9	46.0
0.966000	12.6	9.000	Off	N	10.0	33.4	46.0
0.974000	12.5	9.000	Off	N	10.0	33.5	46.0
0.978000	12.4	9.000	Off	N	10.0	33.6	46.0
1.018000	15.8	9.000	Off	N	10.0	30.2	46.0
1.052000	15.4	9.000	Off	N	10.0	30.6	46.0
22.146000	15.1	9.000	Off	N	10.9	34.9	50.0
22.368000	15.0	9.000	Off	N	10.9	35.0	50.0
22.838000	14.5	9.000	Off	N	11.0	35.5	50.0
23.890000	14.7	9.000	Off	N	11.0	35.3	50.0
24.218000	14.0	9.000	Off	N	11.0	36.0	50.0
24.432000	13.8	9.000	Off	N	11.0	36.2	50.0

2018-12-17

오후 9:06:32

Conducted Emissions (Line 1) (Unterminated)

Test


1 / 2

HCT TEST Report

Common Information

EUT: SM-M205FN/DS
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC_L1 (Unterminated)

FCC CLASS B_Exten Cable

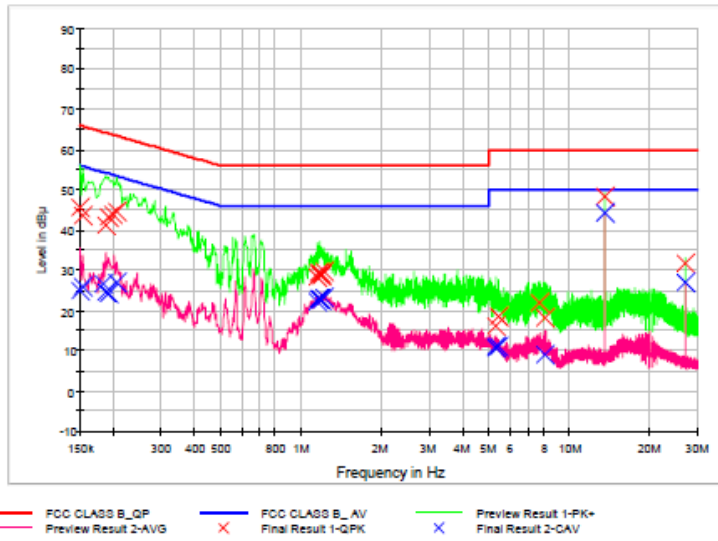

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	45.5	9.000	Off	L1	9.7	20.5	66.0
0.154000	43.6	9.000	Off	L1	9.7	22.2	65.8
0.188000	41.3	9.000	Off	L1	9.7	22.8	64.1
0.192000	43.1	9.000	Off	L1	9.7	20.9	63.9
0.198000	44.0	9.000	Off	L1	9.7	19.7	63.7
0.206000	44.7	9.000	Off	L1	9.7	18.6	63.4
1.154000	28.2	9.000	Off	L1	9.8	27.8	56.0
1.168000	29.2	9.000	Off	L1	9.8	26.8	56.0
1.174000	29.4	9.000	Off	L1	9.8	26.6	56.0
1.184000	28.7	9.000	Off	L1	9.8	27.3	56.0
1.194000	28.9	9.000	Off	L1	9.8	27.1	56.0
1.216000	29.8	9.000	Off	L1	9.8	26.2	56.0
5.296000	16.1	9.000	Off	L1	10.0	43.9	60.0
5.412000	18.6	9.000	Off	L1	10.0	41.4	60.0
7.704000	21.9	9.000	Off	L1	10.2	38.1	60.0
8.140000	18.3	9.000	Off	L1	10.2	41.7	60.0
13.560000	48.3	9.000	Off	L1	10.4	11.7	60.0
27.120000	31.7	9.000	Off	L1	10.8	28.3	60.0

2019-01-14

오전 9:47:09

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	24.8	9.000	Off	L1	9.7	31.2	56.0
0.154000	26.0	9.000	Off	L1	9.7	29.8	55.8
0.184000	26.7	9.000	Off	L1	9.7	27.6	54.3
0.188000	24.7	9.000	Off	L1	9.7	29.4	54.1
0.192000	24.1	9.000	Off	L1	9.7	29.8	53.9
0.206000	26.8	9.000	Off	L1	9.7	26.6	53.4
1.154000	22.2	9.000	Off	L1	9.8	23.8	46.0
1.166000	22.8	9.000	Off	L1	9.8	23.2	46.0
1.170000	22.8	9.000	Off	L1	9.8	23.2	46.0
1.174000	22.9	9.000	Off	L1	9.8	23.1	46.0
1.184000	22.7	9.000	Off	L1	9.8	23.3	46.0
1.216000	23.2	9.000	Off	L1	9.8	22.8	46.0
5.292000	10.9	9.000	Off	L1	10.0	39.1	50.0
5.300000	10.8	9.000	Off	L1	10.0	39.2	50.0
5.412000	10.9	9.000	Off	L1	10.0	39.1	50.0
8.140000	9.0	9.000	Off	L1	10.2	41.0	50.0
13.560000	44.3	9.000	Off	L1	10.4	5.7	50.0
27.120000	26.9	9.000	Off	L1	10.8	23.1	50.0

2019-01-14

오전 9:47:09

Conducted Emissions (Line 2) (Unterminated)

Test


1 / 2

HCT TEST Report

Common Information

EUT: SM-M205FN/DS
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: NFC_N(Unterminated)

FCC CLASS B_Exten Cable

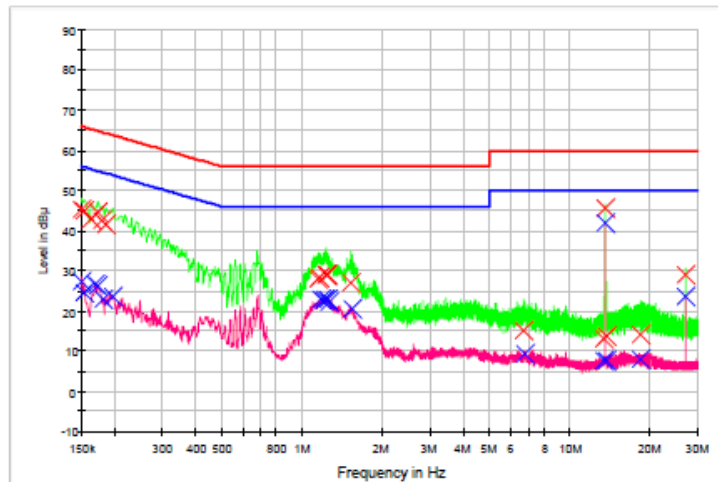

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
— Preview Result 2-AVG x Final Result 1-QPK x Final Result 2-QAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	45.3	9.000	Off	N	9.8	20.7	66.0
0.154000	44.8	9.000	Off	N	9.8	21.0	65.8
0.162000	42.9	9.000	Off	N	9.8	22.5	65.4
0.172000	44.5	9.000	Off	N	9.8	20.4	64.9
0.178000	42.4	9.000	Off	N	9.8	22.1	64.6
0.186000	41.4	9.000	Off	N	9.8	22.8	64.2
1.146000	27.8	9.000	Off	N	10.0	28.2	56.0
1.158000	28.5	9.000	Off	N	10.0	27.5	56.0
1.226000	29.0	9.000	Off	N	10.0	27.0	56.0
1.234000	29.0	9.000	Off	N	10.0	27.0	56.0
1.242000	29.1	9.000	Off	N	10.0	26.9	56.0
1.524000	27.0	9.000	Off	N	10.1	29.0	56.0
6.690000	15.1	9.000	Off	N	10.3	44.9	60.0
13.348000	13.1	9.000	Off	N	10.6	46.9	60.0
13.560000	45.7	9.000	Off	N	10.6	14.3	60.0
13.672000	13.8	9.000	Off	N	10.6	46.2	60.0
18.308000	14.2	9.000	Off	N	10.8	45.8	60.0
27.120000	29.1	9.000	Off	N	11.1	30.9	60.0

2019-01-14

오전 10:07:00

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	27.3	9.000	Off	N	9.8	28.7	56.0
0.154000	24.6	9.000	Off	N	9.8	31.1	55.8
0.168000	26.6	9.000	Off	N	9.8	28.5	55.1
0.172000	26.1	9.000	Off	N	9.8	28.8	54.9
0.180000	22.8	9.000	Off	N	9.8	31.7	54.5
0.196000	23.7	9.000	Off	N	9.8	30.1	53.8
1.176000	22.8	9.000	Off	N	10.0	23.2	46.0
1.204000	22.7	9.000	Off	N	10.0	23.3	46.0
1.224000	22.8	9.000	Off	N	10.0	23.2	46.0
1.242000	22.8	9.000	Off	N	10.0	23.2	46.0
1.254000	22.2	9.000	Off	N	10.0	23.8	46.0
1.530000	20.4	9.000	Off	N	10.1	25.6	46.0
6.806000	9.4	9.000	Off	N	10.3	40.6	50.0
13.348000	7.6	9.000	Off	N	10.6	42.4	50.0
13.560000	42.0	9.000	Off	N	10.6	8.0	50.0
13.672000	7.6	9.000	Off	N	10.6	42.4	50.0
18.308000	7.9	9.000	Off	N	10.8	42.1	50.0
27.120000	23.7	9.000	Off	N	11.1	26.3	50.0

2019-01-14

오전 10:07:00

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/27/2018	Annual	100033
ESPAC	SU-642 / Temperature Chamber	03/30/2018	Annual	0093008124
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY52090906
Agilent	N1911A / Power Meter	04/16/2018	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/16/2018	Annual	MY52260025
Hewlett Packard	11667B / Power Splitter	06/07/2018	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/26/2018	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2018	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	04/19/2017	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	VULB 9160 / TRILOG Antenna	08/09/2018	Biennial	9160-3368
Schwarzbeck	BBHA 9120D / Horn Antenna	05/02/2017	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/03/2018	Annual	100688
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/28/2018	Annual	101068-SZ
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY51110085
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	06/07/2018	Annual	8
Wainwright Instruments	WHKX7.0/18G-8SS / High Pass Filter	05/09/2018	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/29/2018	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2018	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/07/2018	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	07/17/2018	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	07/10/2018	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/10/2018	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/10/2018	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/29/2018	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/27/2018	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1901-FC004-P
2	HCT-RF-1901-FC005-P
3	HCT-RF-1901-FC006-P
4	HCT-RF-1901-FC007-P