

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
February 07, 2022

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2201-FC092-R1

FCC ID: A3LSMM236B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-M236B/DS
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66/4 (1.4)	1710.7 – 1779.3	1M09G7D	QPSK	0.177	22.48
		1M09W7D	16QAM	0.152	21.81
		1M09W7D	64QAM	0.119	20.74
LTE – Band66/4 (3)	1711.5 – 1778.5	2M71G7D	QPSK	0.179	22.54
		2M70W7D	16QAM	0.154	21.87
		2M71W7D	64QAM	0.121	20.81
LTE – Band66/4 (5)	1712.5 – 1777.5	4M49G7D	QPSK	0.179	22.53
		4M51W7D	16QAM	0.153	21.83
		4M52W7D	64QAM	0.121	20.81
LTE – Band66/4 (10)	1715.0 – 1775.0	8M99G7D	QPSK	0.171	22.33
		8M98W7D	16QAM	0.148	21.69
		8M98W7D	64QAM	0.114	20.57
LTE – Band66/4 (15)	1717.5 – 1772.5	13M4G7D	QPSK	0.176	22.46
		13M4W7D	16QAM	0.151	21.80
		13M4W7D	64QAM	0.117	20.67
LTE – Band66/4 (20)	1720.0 – 1770.0	17M9G7D	QPSK	0.175	22.44
		17M9W7D	16QAM	0.151	21.78
		17M9W7D	64QAM	0.115	20.60

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2201-FC092-R1

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2201-FC092	January 26, 2022	- First Approval Report
HCT-RF-2201-FC092-R1	February 07, 2022	- Revised the 1 & 24 pages. (Watt)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST)	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION	22
8. TEST DATA	24
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	24
8.2 RADIATED SPURIOUS EMISSIONS	27
8.3 PEAK-TO-AVERAGE RATIO.....	28
8.4 OCCUPIED BANDWIDTH	29
8.5 CONDUCTED SPURIOUS EMISSIONS	30
8.6 BAND EDGE	31
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	32
9. TEST PLOTS.....	50
10. ANNEX A_ TEST SETUP PHOTO.....	159

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMM236B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile phone
Model(s):	SM-M236B/DS
Tx Frequency:	1710.7 MHz – 1779.3 MHz (LTE – Band 66/4 (1.4 MHz)) 1711.5 MHz – 1778.5 MHz (LTE – Band 66/4 (3 MHz)) 1712.5 MHz – 1777.5 MHz (LTE – Band 66/4 (5 MHz)) 1715.0 MHz – 1775.0 MHz (LTE – Band 66/4 (10 MHz)) 1717.5 MHz – 1772.5 MHz (LTE – Band 66/4 (15 MHz)) 1720.0 MHz – 1770.0 MHz (LTE – Band 66/4 (20 MHz))
Date(s) of Tests:	December 23, 2021 ~ January 25, 2022
Serial number:	Radiated: R3CRB0JMDVJ Conducted: R3CRB0HM09R

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac (20/40/80), Bluetooth, BT LE, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

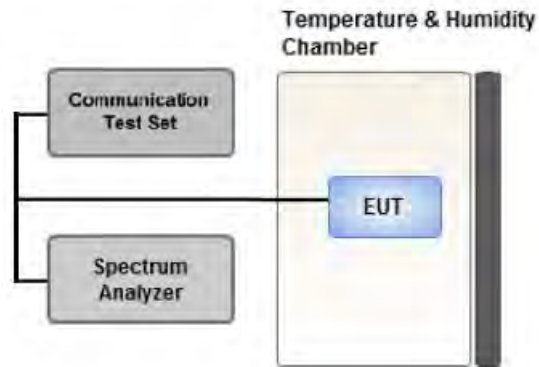

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

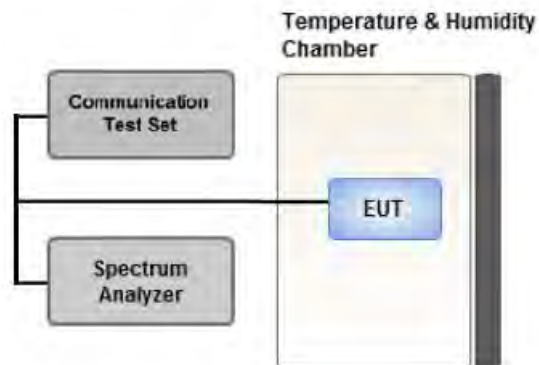

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

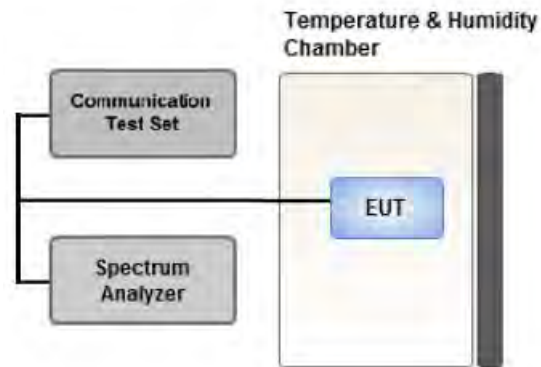

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

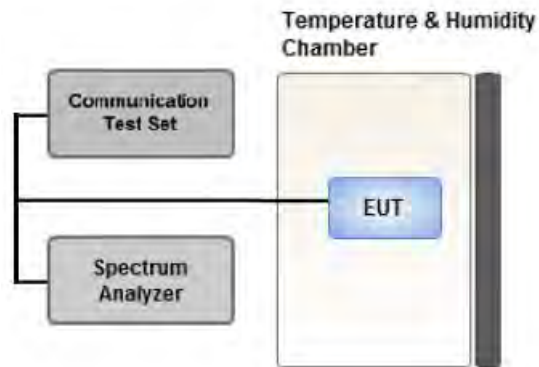

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

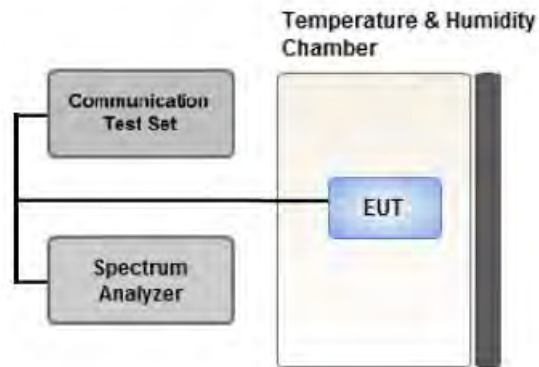

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at

least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location. There has no significant emission raised.
- WWAN + WLAN 5 GHz + BT (Worst case : Stand alone)
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 3 MHz)
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.
- LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power. Therefore, test data provided in this report covers Band 4 as well as Band 66.

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM	1	0	Z
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power. Therefore, test data provided in this report covers Band 4 as well as Band 66.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6200863156	12/29/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
132322	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1710.7	LTE B66/ B4 1.4 MHz	QPSK	-19.59	14.20	10.04	2.05	V	< 1.00	0.165	22.19
		16-QAM	-20.19	13.60	10.04	2.05	V		0.144	21.59
		64-QAM	-21.26	12.53	10.04	2.05	V		0.113	20.52
1745.0		QPSK	-19.98	13.74	10.18	2.06	V		0.154	21.86
		16-QAM	-20.65	13.07	10.18	2.06	V		0.132	21.19
		64-QAM	-21.70	12.02	10.18	2.06	V		0.103	20.14
1779.3		QPSK	-19.39	14.29	10.26	2.07	V		0.177	22.48
		16-QAM	-20.06	13.62	10.26	2.07	V		0.152	21.81
		64-QAM	-21.13	12.55	10.26	2.07	V		0.119	20.74

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1711.5	LTE B66/ B4 3 MHz	QPSK	-19.45	14.34	10.04	2.05	V	< 1.00	0.171	22.33
		16-QAM	-20.13	13.66	10.04	2.05	V		0.146	21.65
		64-QAM	-21.23	12.56	10.04	2.05	V		0.113	20.55
1745.0		QPSK	-19.93	13.79	10.18	2.06	V		0.155	21.91
		16-QAM	-20.64	13.08	10.18	2.06	V		0.132	21.20
		64-QAM	-21.66	12.06	10.18	2.06	V		0.104	20.18
1778.5		QPSK	-19.33	14.35	10.26	2.07	V		0.179	22.54
		16-QAM	-20.00	13.68	10.26	2.07	V		0.154	21.87
		64-QAM	-21.06	12.62	10.26	2.07	V		0.121	20.81

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1712.5	LTE B66/ B4 5 MHz	QPSK	-19.46	14.33	10.04	2.05	V	< 1.00	0.170	22.32
		16-QAM	-20.14	13.65	10.04	2.05	V		0.146	21.64
		64-QAM	-21.22	12.57	10.04	2.05	V		0.114	20.56
1745.0		QPSK	-20.00	13.72	10.18	2.06	V		0.153	21.84
		16-QAM	-20.68	13.04	10.18	2.06	V		0.131	21.16
		64-QAM	-21.71	12.01	10.18	2.06	V		0.103	20.13
1777.5		QPSK	-19.34	14.34	10.26	2.07	V		0.179	22.53
		16-QAM	-20.04	13.64	10.26	2.07	V		0.153	21.83
		64-QAM	-21.06	12.62	10.26	2.07	V		0.121	20.81

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1715.0	LTE B66/ B4 10 MHz	QPSK	-19.71	14.04	10.06	2.05	V	< 1.00	0.160	22.05
		16-QAM	-20.37	13.38	10.06	2.05	V		0.138	21.39
		64-QAM	-21.50	12.25	10.06	2.05	V		0.106	20.26
1745.0		QPSK	-20.24	13.48	10.18	2.06	V		0.145	21.60
		16-QAM	-20.88	12.84	10.18	2.06	V		0.125	20.96
		64-QAM	-22.02	11.70	10.18	2.06	V		0.096	19.82
1775.0		QPSK	-19.54	14.15	10.25	2.07	V		0.171	22.33
		16-QAM	-20.18	13.51	10.25	2.07	V		0.148	21.69
		64-QAM	-21.30	12.39	10.25	2.07	V		0.114	20.57

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1717.5	LTE B66/ B4 15 MHz	QPSK	-19.69	14.02	10.08	2.05	V	< 1.00	0.160	22.05
		16-QAM	-20.32	13.39	10.08	2.05	V		0.139	21.42
		64-QAM	-21.48	12.23	10.08	2.05	V		0.106	20.26
1745.0		QPSK	-20.05	13.67	10.18	2.06	V		0.151	21.79
		16-QAM	-20.70	13.02	10.18	2.06	V		0.130	21.14
		64-QAM	-21.84	11.88	10.18	2.06	V		0.100	20.00
1772.5		QPSK	-19.40	14.29	10.24	2.07	V		0.176	22.46
		16-QAM	-20.06	13.63	10.24	2.07	V		0.151	21.80
		64-QAM	-21.19	12.50	10.24	2.07	V		0.117	20.67

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1720.0	LTE B66/ B4 20 MHz	QPSK	-19.81	13.90	10.08	2.05	V	< 1.00	0.156	21.93
		16-QAM	-20.48	13.23	10.08	2.05	V		0.134	21.26
		64-QAM	-21.68	12.03	10.08	2.05	V		0.102	20.06
1745.0		QPSK	-20.19	13.53	10.18	2.06	V		0.146	21.65
		16-QAM	-20.81	12.91	10.18	2.06	V		0.127	21.03
		64-QAM	-21.97	11.75	10.18	2.06	V		0.097	19.87
1770.0		QPSK	-19.42	14.27	10.24	2.07	V		0.175	22.44
		16-QAM	-20.08	13.61	10.24	2.07	V		0.151	21.78
		64-QAM	-21.26	12.43	10.24	2.07	V		0.115	20.60

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 1778.5 MHz
- ▣ MEASURED OUTPUT POWER: 22.54 dBm = 0.180 W
- ▣ MODE: LTE B66 / B4
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 35.54 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
131987 (1711.5)	3 423.00	-55.45	12.56	-62.18	2.95	H	-52.57	75.12
	5 134.50	-54.39	12.27	-51.89	3.67	H	-43.28	65.82
	6 846.00	-55.43	12.00	-48.75	4.25	H	-41.00	63.54
132322 (1745.0)	3 490.00	-54.12	12.42	-60.22	2.97	V	-50.77	73.25
	5 235.00	-55.82	12.71	-55.02	3.70	H	-46.00	68.48
	6 980.00	-56.65	11.52	-48.47	4.28	H	-41.23	63.71
132657 (1778.5)	3 557.00	-55.02	12.38	-60.86	3.01	H	-51.49	74.03
	5 335.50	-54.96	13.00	-54.25	3.74	V	-44.98	67.52
	7 114.00	-56.76	10.87	-47.66	4.34	H	-41.13	63.67

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
66/4	1.4 MHz	1745.0	QPSK	6	0	5.16
			16-QAM			5.90
			64-QAM			6.48
	3 MHz		QPSK	15		5.17
			16-QAM			5.90
			64-QAM			6.40
	5 MHz		QPSK	25		5.17
			16-QAM			5.87
			64-QAM			6.37
	10 MHz		QPSK	50		5.15
			16-QAM			5.87
			64-QAM			6.36
	15 MHz		QPSK	75		5.06
			16-QAM			5.80
			64-QAM			6.37
20 MHz	QPSK	100	4.94			
	16-QAM		5.77			
	64-QAM		6.28			

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 105 ~ 122.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
66/4	1.4 MHz	1745.0	QPSK	6	0	1.0940
			16-QAM			1.0901
			64-QAM			1.0924
	3 MHz		QPSK	15		2.7122
			16-QAM			2.7021
			64-QAM			2.7082
	5 MHz		QPSK	25		4.4909
			16-QAM			4.5090
			64-QAM			4.5148
	10 MHz		QPSK	50		8.9905
			16-QAM			8.9809
			64-QAM			8.9755
	15 MHz		QPSK	75		13.426
			16-QAM			13.438
			64-QAM			13.405
20 MHz	QPSK	100	17.927			
	16-QAM		17.848			
	64-QAM		17.883			

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 87 ~ 104.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66/4	1.4	1710.7	3.4213	27.976	-76.162	-48.186	-13.00
		1745.0	3.4896	27.976	-75.295	-47.319	
		1779.3	3.7000	27.976	-77.351	-49.375	
	3	1711.5	3.4208	27.976	-77.157	-49.181	
		1745.0	3.4881	27.976	-74.959	-46.983	
		1778.5	3.6935	27.976	-77.065	-49.089	
	5	1712.5	3.4213	27.976	-76.683	-48.707	
		1745.0	3.4866	27.976	-76.068	-48.092	
		1777.5	3.6965	27.976	-76.873	-48.897	
	10	1715.0	3.4218	27.976	-76.578	-48.602	
		1745.0	3.4821	27.976	-75.962	-47.986	
		1775.0	3.6860	27.976	-77.288	-49.312	
	15	1717.5	3.4223	27.976	-76.846	-48.870	
		1745.0	3.4771	27.976	-75.073	-47.097	
		1772.5	3.5589	27.976	-77.070	-49.094	
	20	1720.0	3.4228	27.976	-77.001	-49.025	
		1745.0	3.4726	27.976	-75.575	-47.599	
		1770.0	3.7254	27.976	-77.164	-49.188	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 123 ~ 158.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 51 ~ 86.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1710,700,000 Hz
- ▣ CHANNEL: 131979 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1710 700 095	0.0	0.000 000	0.000
100 %		-30	1710 700 222	126.8	0.000 007	0.074
100 %		-20	1710 700 214	119.0	0.000 007	0.070
100 %		-10	1710 699 990	-105.0	-0.000 006	-0.061
100 %		0	1710 700 229	133.8	0.000 008	0.078
100 %		+10	1710 700 229	134.2	0.000 008	0.078
100 %		+30	1710 699 961	-133.8	-0.000 008	-0.078
100 %		+40	1710 699 949	-145.4	-0.000 008	-0.085
100 %		+50	1710 699 965	-130.0	-0.000 008	-0.076
Batt. Endpoint		3.650	+20	1710 699 969	-126.2	-0.000 007

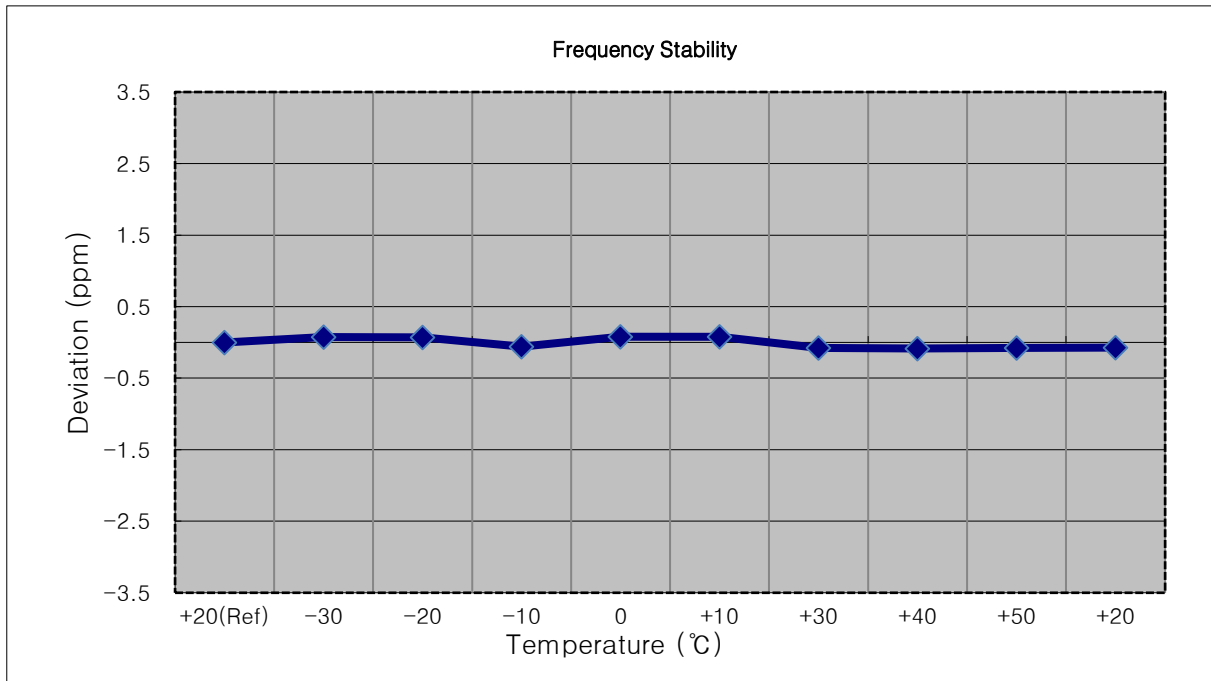


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 131987 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1711 499 864	0.0	0.000 000	0.000
100 %		-30	1711 499 714	-150.1	-0.000 009	-0.088
100 %		-20	1711 499 735	-128.9	-0.000 008	-0.075
100 %		-10	1711 499 735	-128.8	-0.000 008	-0.075
100 %		0	1711 499 972	107.8	0.000 006	0.063
100 %		+10	1711 499 745	-119.1	-0.000 007	-0.070
100 %		+30	1711 499 983	118.9	0.000 007	0.069
100 %		+40	1711 499 987	122.7	0.000 007	0.072
100 %		+50	1711 499 772	-92.3	-0.000 005	-0.054
Batt. Endpoint	3.650	+20	1711 499 989	125.1	0.000 007	0.073

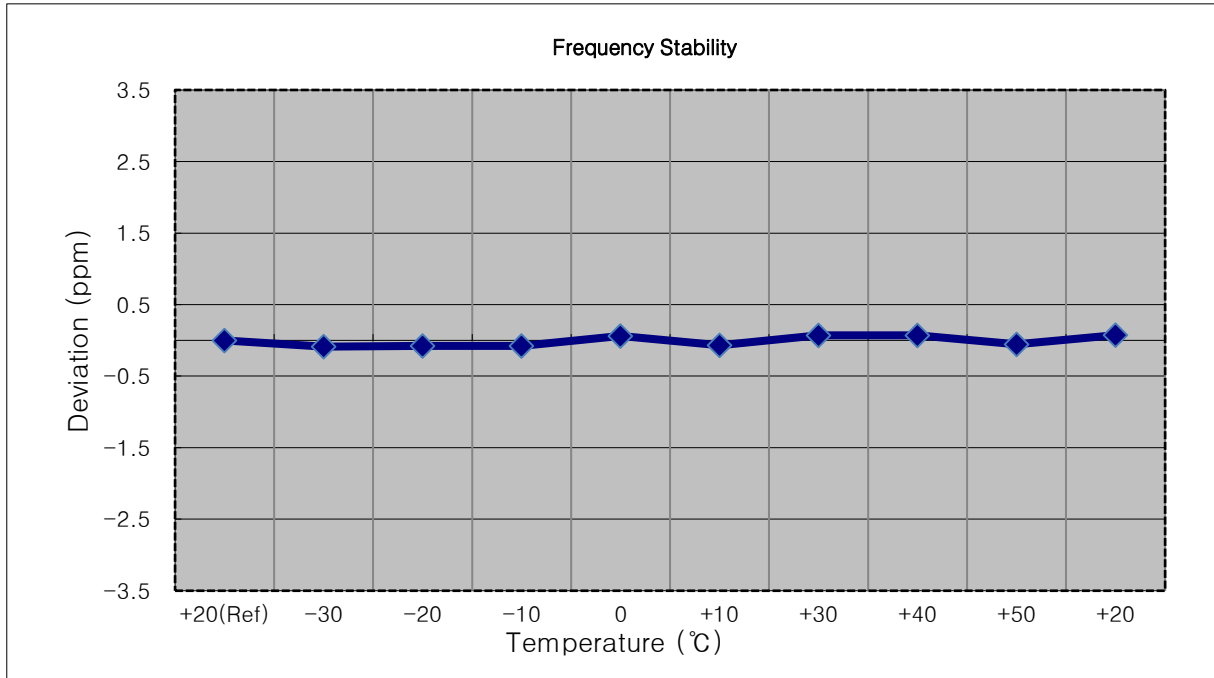


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1712,500,000 Hz
- ▣ CHANNEL: 131997 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1712 500 118	0.0	0.000 000	0.000
100 %		-30	1712 500 029	-89.5	-0.000 005	-0.052
100 %		-20	1712 499 988	-130.4	-0.000 008	-0.076
100 %		-10	1712 500 031	-87.2	-0.000 005	-0.051
100 %		0	1712 499 992	-126.6	-0.000 007	-0.074
100 %		+10	1712 500 224	105.5	0.000 006	0.062
100 %		+30	1712 500 238	119.9	0.000 007	0.070
100 %		+40	1712 500 204	86.2	0.000 005	0.050
100 %		+50	1712 500 242	123.9	0.000 007	0.072
Batt. Endpoint	3.650	+20	1712 500 013	-105.5	-0.000 006	-0.062

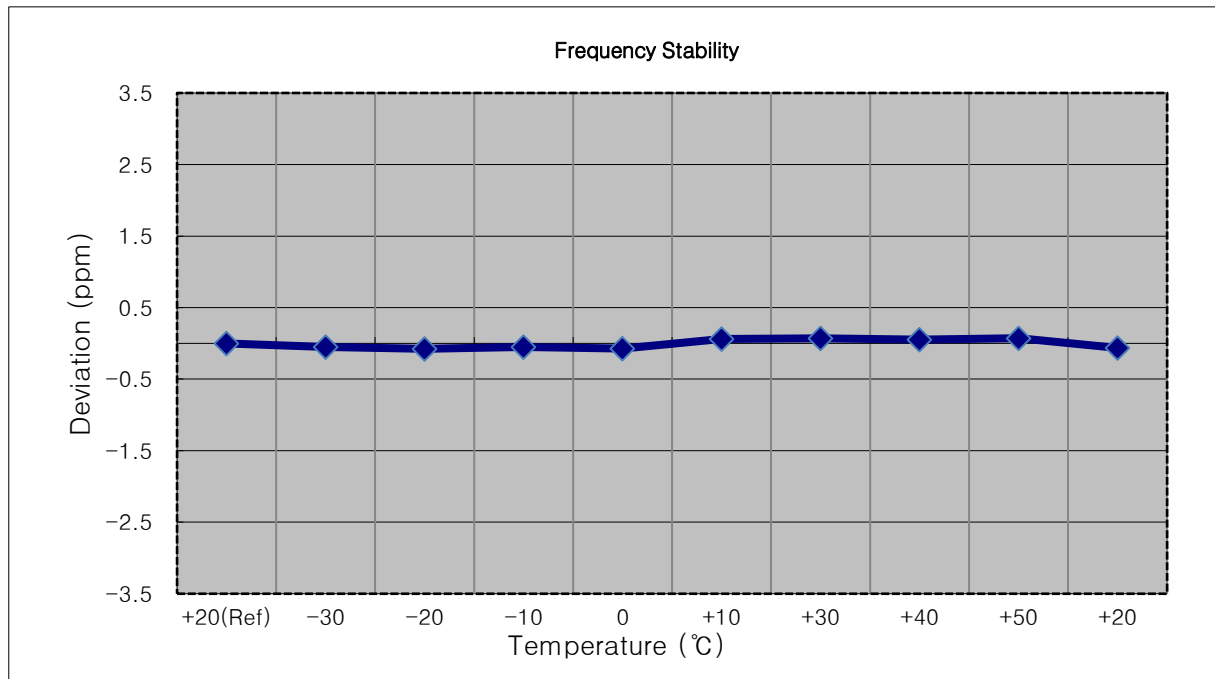


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1715,000,000 Hz
- ▣ CHANNEL: 132022 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1714 999 892	0.0	0.000 000	0.000
100 %		-30	1714 999 784	-108.0	-0.000 006	-0.063
100 %		-20	1714 999 987	95.6	0.000 006	0.056
100 %		-10	1714 999 791	-101.0	-0.000 006	-0.059
100 %		0	1714 999 787	-105.2	-0.000 006	-0.061
100 %		+10	1714 999 796	-95.4	-0.000 006	-0.056
100 %		+30	1714 999 772	-120.2	-0.000 007	-0.070
100 %		+40	1714 999 769	-122.3	-0.000 007	-0.071
100 %		+50	1714 999 786	-105.3	-0.000 006	-0.061
Batt. Endpoint	3.650	+20	1714 999 786	-106.2	-0.000 006	-0.062

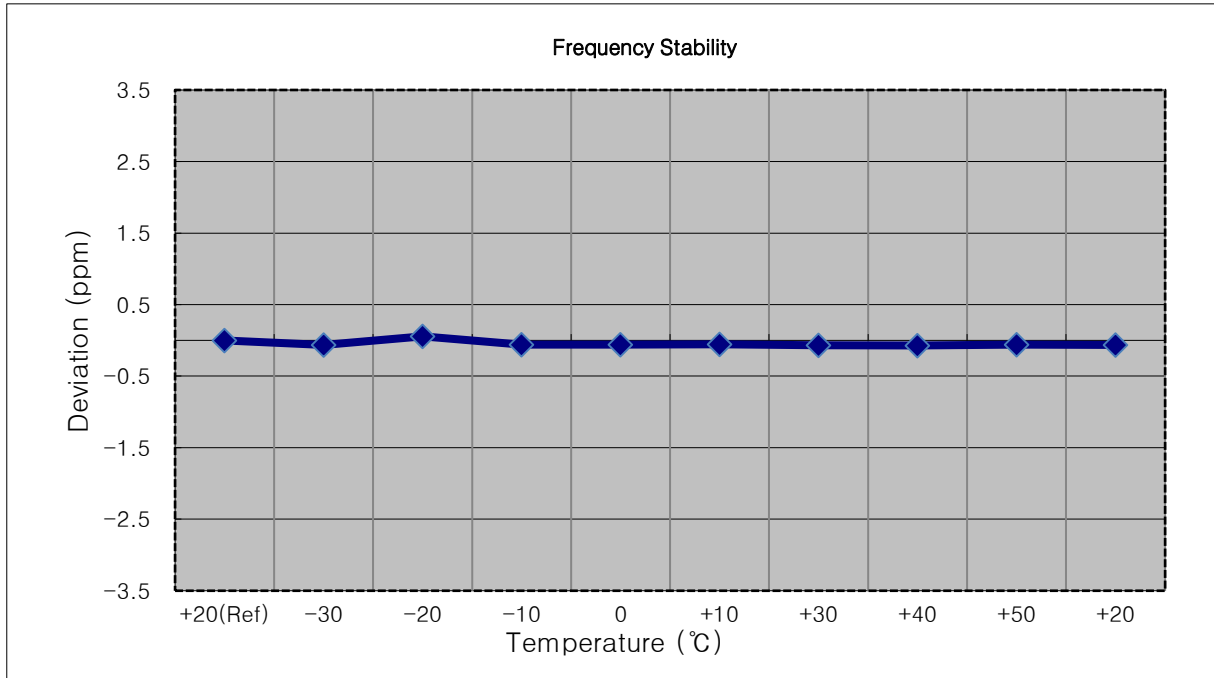


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1717,500,000 Hz
- ▣ CHANNEL: 132047 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1717 499 933	0.0	0.000 000	0.000
100 %		-30	1717 499 839	-93.9	-0.000 005	-0.055
100 %		-20	1717 499 873	-60.0	-0.000 003	-0.035
100 %		-10	1717 499 858	-74.7	-0.000 004	-0.043
100 %		0	1717 500 023	89.8	0.000 005	0.052
100 %		+10	1717 499 831	-101.5	-0.000 006	-0.059
100 %		+30	1717 499 823	-109.5	-0.000 006	-0.064
100 %		+40	1717 500 022	89.1	0.000 005	0.052
100 %		+50	1717 499 863	-69.9	-0.000 004	-0.041
Batt. Endpoint	3.650	+20	1717 499 823	-109.8	-0.000 006	-0.064

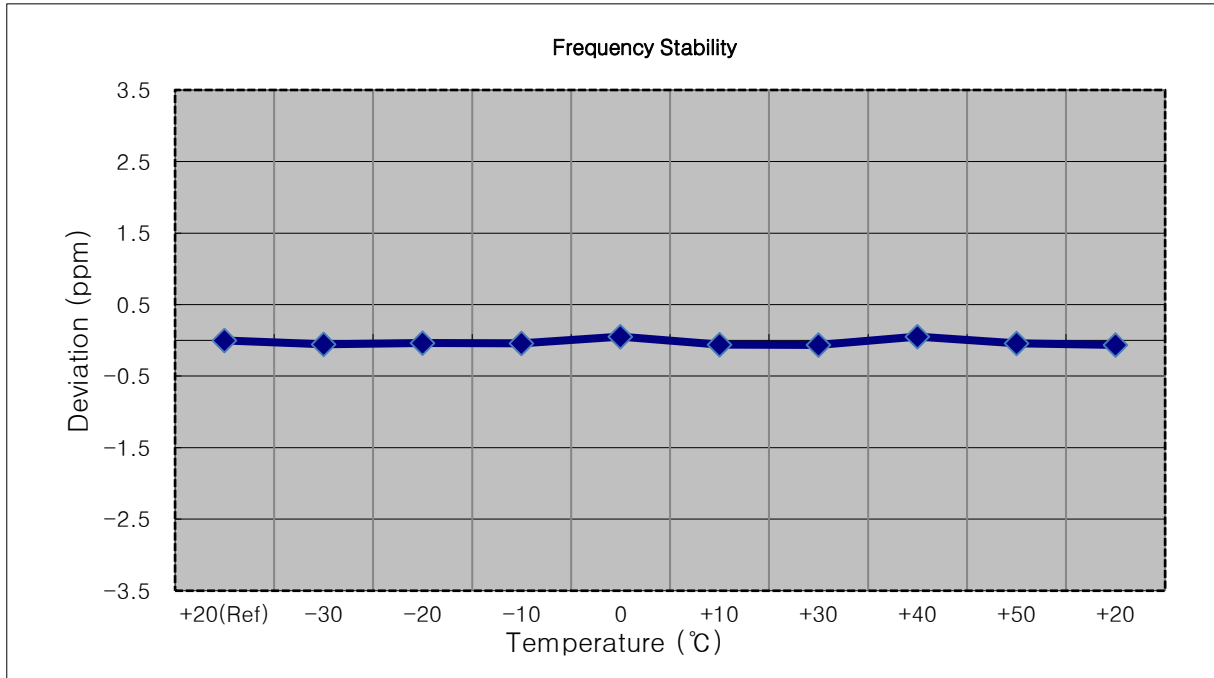


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 132072 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1720 000 069	0.0	0.000 000	0.000
100 %		-30	1720 000 010	-59.0	-0.000 003	-0.034
100 %		-20	1719 999 985	-83.8	-0.000 005	-0.049
100 %		-10	1719 999 979	-90.0	-0.000 005	-0.052
100 %		0	1719 999 983	-85.7	-0.000 005	-0.050
100 %		+10	1719 999 980	-89.1	-0.000 005	-0.052
100 %		+30	1719 999 984	-84.6	-0.000 005	-0.049
100 %		+40	1720 000 013	-55.3	-0.000 003	-0.032
100 %		+50	1720 000 007	-62.0	-0.000 004	-0.036
Batt. Endpoint		3.650	+20	1719 999 982	-86.7	-0.000 005

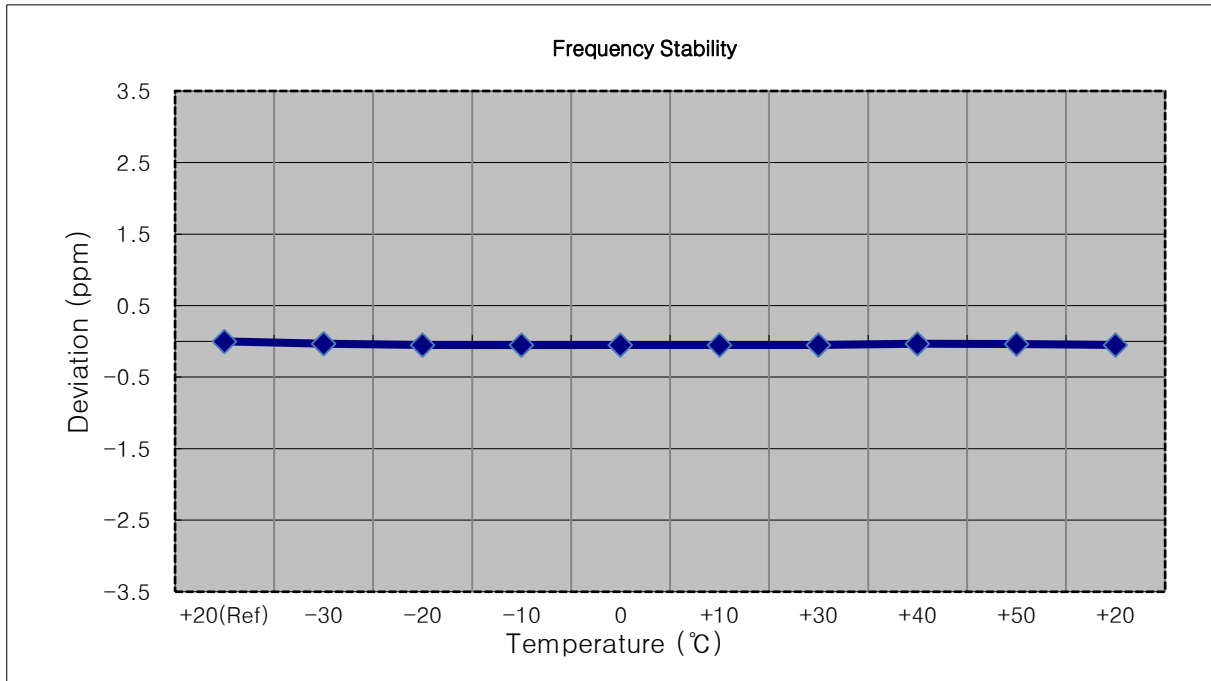


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 128	0.0	0.000 000	0.000
100 %		-30	1745 000 026	-102.1	-0.000 006	-0.059
100 %		-20	1744 999 995	-133.0	-0.000 008	-0.076
100 %		-10	1744 999 994	-134.2	-0.000 008	-0.077
100 %		0	1744 999 984	-143.9	-0.000 008	-0.082
100 %		+10	1744 999 978	-150.0	-0.000 009	-0.086
100 %		+30	1745 000 234	105.9	0.000 006	0.061
100 %		+40	1745 000 253	124.5	0.000 007	0.071
100 %		+50	1745 000 219	90.5	0.000 005	0.052
Batt. Endpoint	3.650	+20	1744 999 988	-140.4	-0.000 008	-0.080

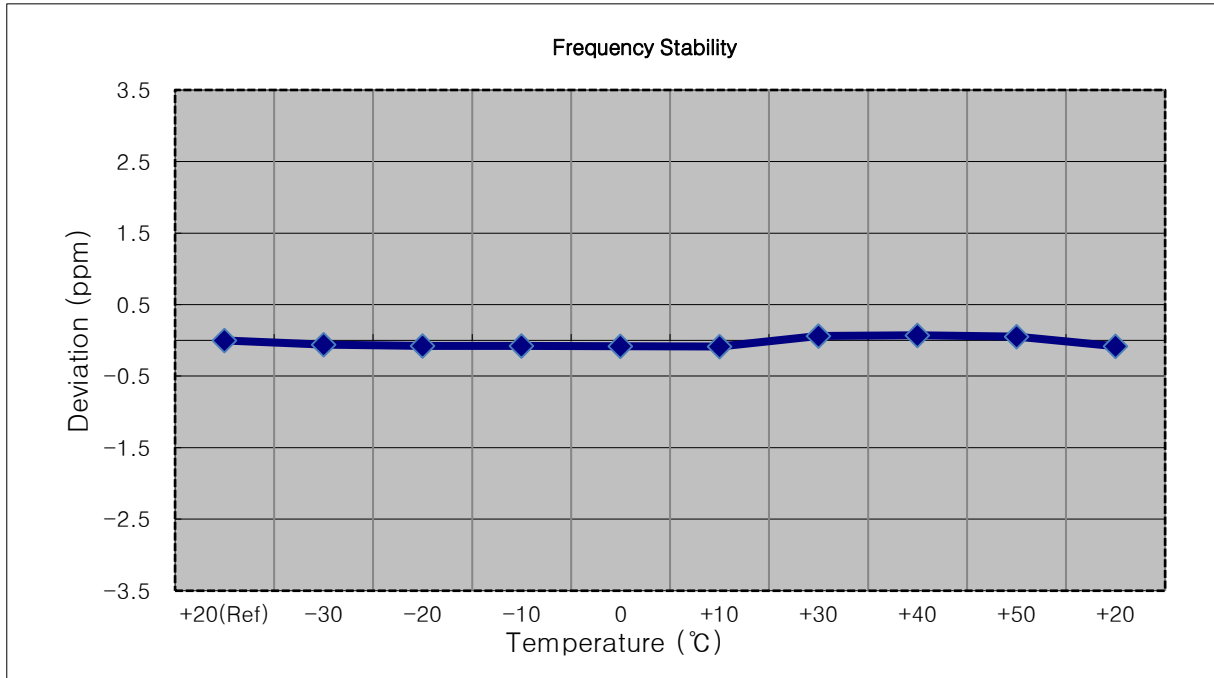


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 873	0.0	0.000 000	0.000
100 %		-30	1744 999 758	-114.2	-0.000 007	-0.065
100 %		-20	1744 999 732	-140.6	-0.000 008	-0.081
100 %		-10	1744 999 972	99.9	0.000 006	0.057
100 %		0	1744 999 730	-142.9	-0.000 008	-0.082
100 %		+10	1744 999 748	-125.0	-0.000 007	-0.072
100 %		+30	1744 999 731	-141.7	-0.000 008	-0.081
100 %		+40	1744 999 973	100.5	0.000 006	0.058
100 %		+50	1744 999 989	116.8	0.000 007	0.067
Batt. Endpoint	3.650	+20	1744 999 727	-145.3	-0.000 008	-0.083

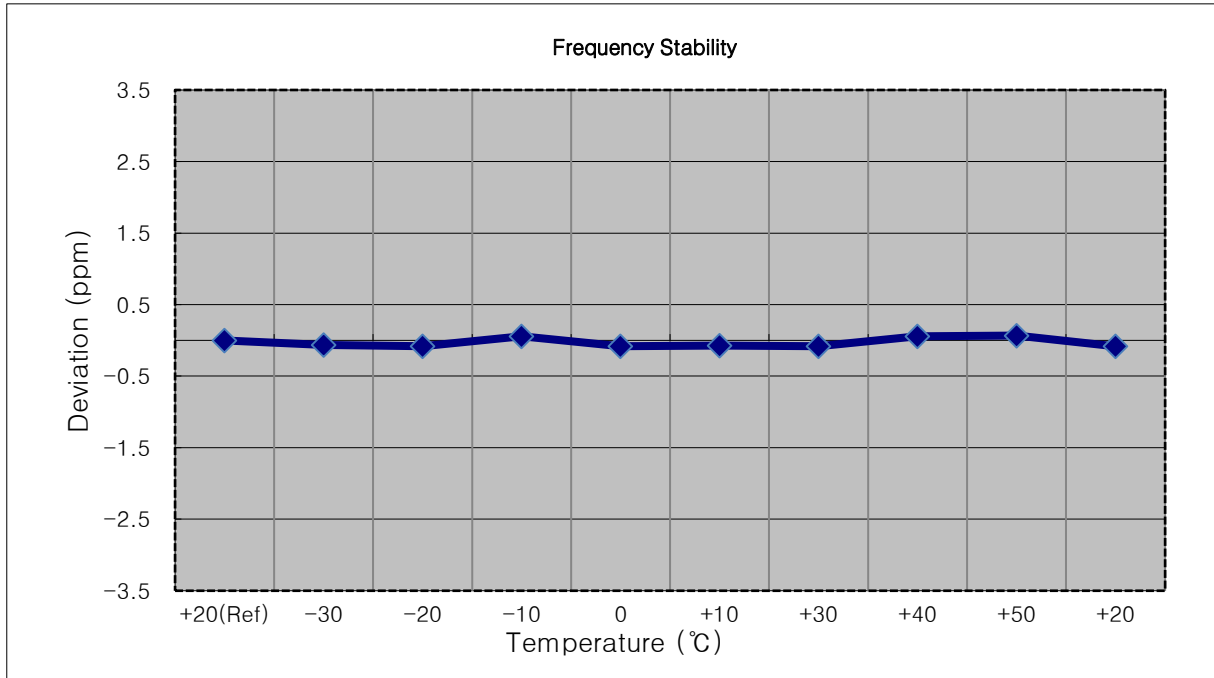


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 862	0.0	0.000 000	0.000
100 %		-30	1744 999 949	86.6	0.000 005	0.050
100 %		-20	1744 999 727	-135.4	-0.000 008	-0.078
100 %		-10	1744 999 979	116.9	0.000 007	0.067
100 %		0	1744 999 744	-118.2	-0.000 007	-0.068
100 %		+10	1744 999 767	-95.7	-0.000 005	-0.055
100 %		+30	1744 999 958	95.6	0.000 005	0.055
100 %		+40	1744 999 939	76.4	0.000 004	0.044
100 %		+50	1744 999 980	117.8	0.000 007	0.068
Batt. Endpoint	3.650	+20	1744 999 964	101.9	0.000 006	0.058

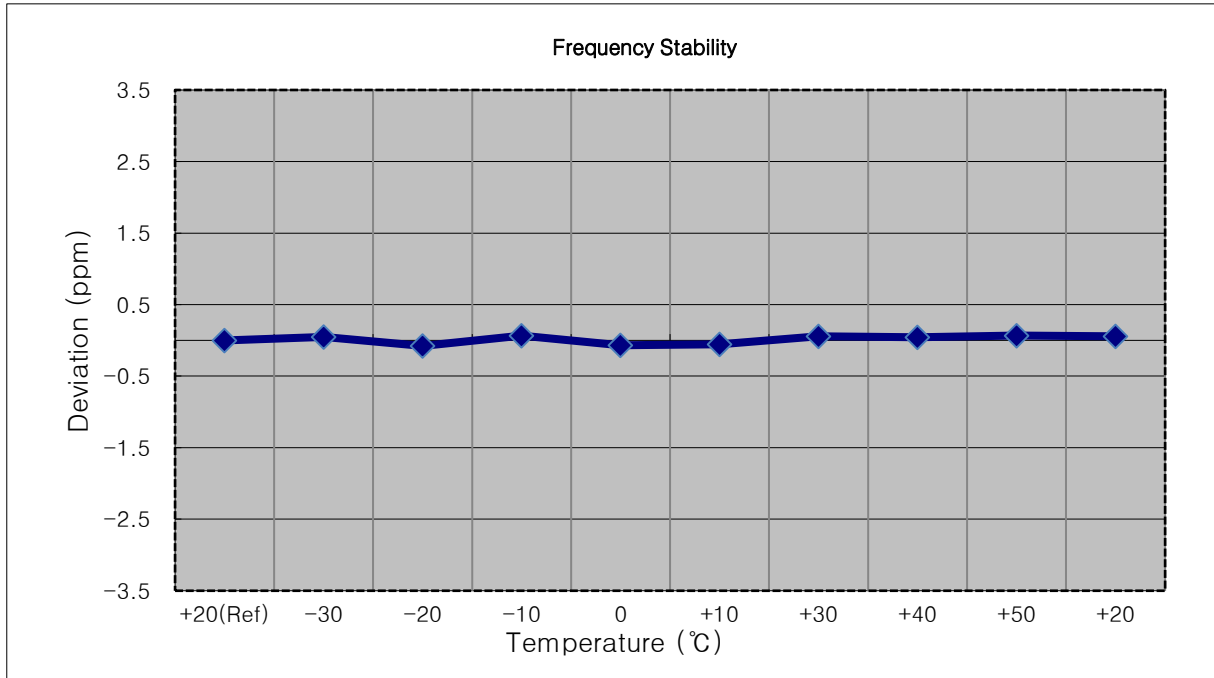


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 093	0.0	0.000 000	0.000
100 %		-30	1745 000 185	91.6	0.000 005	0.052
100 %		-20	1744 999 962	-131.1	-0.000 008	-0.075
100 %		-10	1745 000 191	97.7	0.000 006	0.056
100 %		0	1744 999 979	-114.6	-0.000 007	-0.066
100 %		+10	1745 000 174	80.3	0.000 005	0.046
100 %		+30	1745 000 189	95.2	0.000 005	0.055
100 %		+40	1745 000 007	-86.0	-0.000 005	-0.049
100 %		+50	1745 000 003	-90.2	-0.000 005	-0.052
Batt. Endpoint	3.650	+20	1744 999 964	-129.2	-0.000 007	-0.074

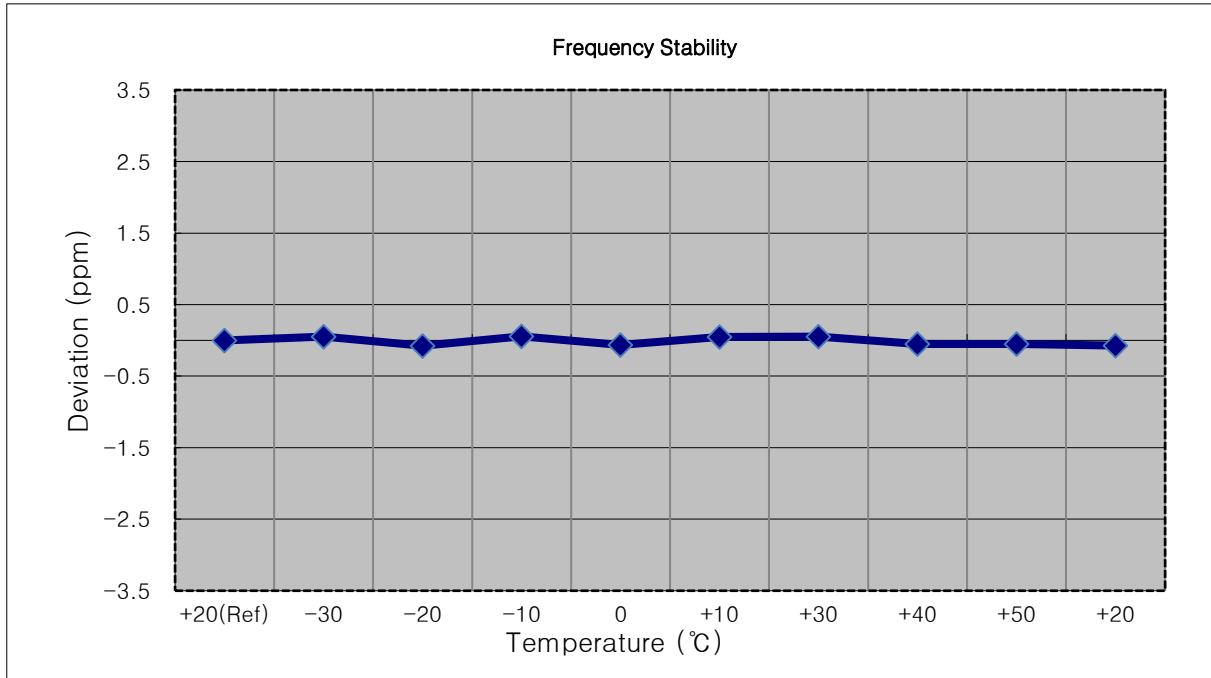


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 912	0.0	0.000 000	0.000
100 %		-30	1744 999 826	-85.6	-0.000 005	-0.049
100 %		-20	1744 999 810	-102.0	-0.000 006	-0.058
100 %		-10	1744 999 843	-69.0	-0.000 004	-0.040
100 %		0	1745 000 007	95.1	0.000 005	0.054
100 %		+10	1744 999 997	85.1	0.000 005	0.049
100 %		+30	1744 999 802	-109.6	-0.000 006	-0.063
100 %		+40	1744 999 808	-103.9	-0.000 006	-0.060
100 %		+50	1744 999 802	-110.0	-0.000 006	-0.063
Batt. Endpoint	3.650	+20	1744 999 805	-106.6	-0.000 006	-0.061

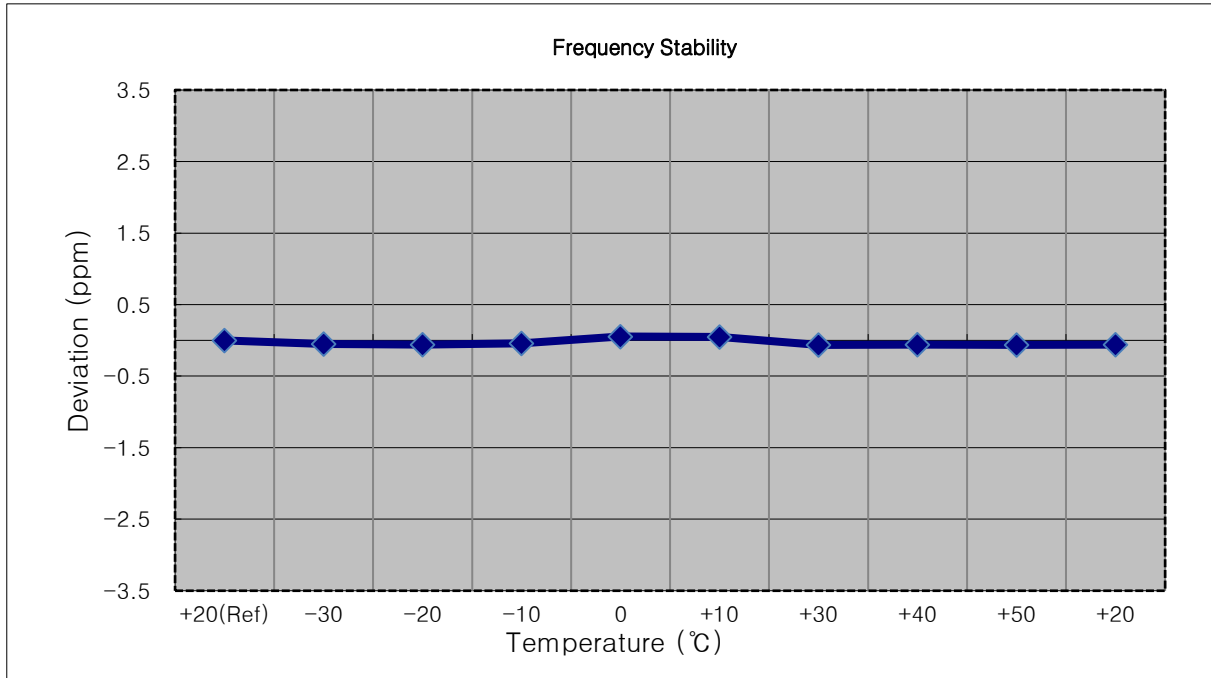


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 072	0.0	0.000 000	0.000
100 %		-30	1745 000 011	-61.1	-0.000 004	-0.035
100 %		-20	1745 000 010	-61.3	-0.000 004	-0.035
100 %		-10	1745 000 146	74.2	0.000 004	0.043
100 %		0	1745 000 000	-71.7	-0.000 004	-0.041
100 %		+10	1744 999 988	-83.8	-0.000 005	-0.048
100 %		+30	1745 000 148	76.7	0.000 004	0.044
100 %		+40	1744 999 982	-89.3	-0.000 005	-0.051
100 %		+50	1745 000 145	73.0	0.000 004	0.042
Batt. Endpoint	3.650	+20	1744 999 977	-94.5	-0.000 005	-0.054

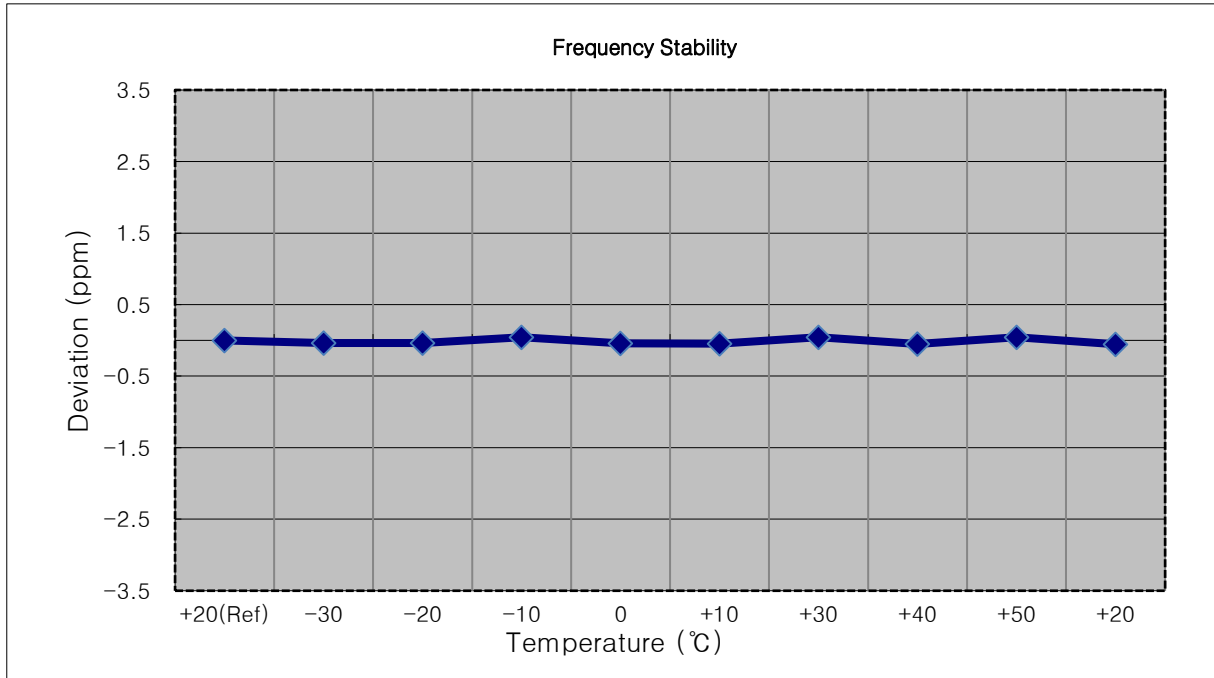


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1779,300,000 Hz
- ▣ CHANNEL: 132665 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1779 299 850	0.0	0.000 000	0.000
100 %		-30	1779 299 985	134.8	0.000 008	0.076
100 %		-20	1779 299 713	-137.0	-0.000 008	-0.077
100 %		-10	1779 299 696	-154.3	-0.000 009	-0.087
100 %		0	1779 299 708	-142.4	-0.000 008	-0.080
100 %		+10	1779 299 752	-98.0	-0.000 006	-0.055
100 %		+30	1779 299 692	-158.0	-0.000 009	-0.089
100 %		+40	1779 299 727	-123.0	-0.000 007	-0.069
100 %		+50	1779 299 709	-141.3	-0.000 008	-0.079
Batt. Endpoint	3.650	+20	1779 299 946	95.5	0.000 005	0.054

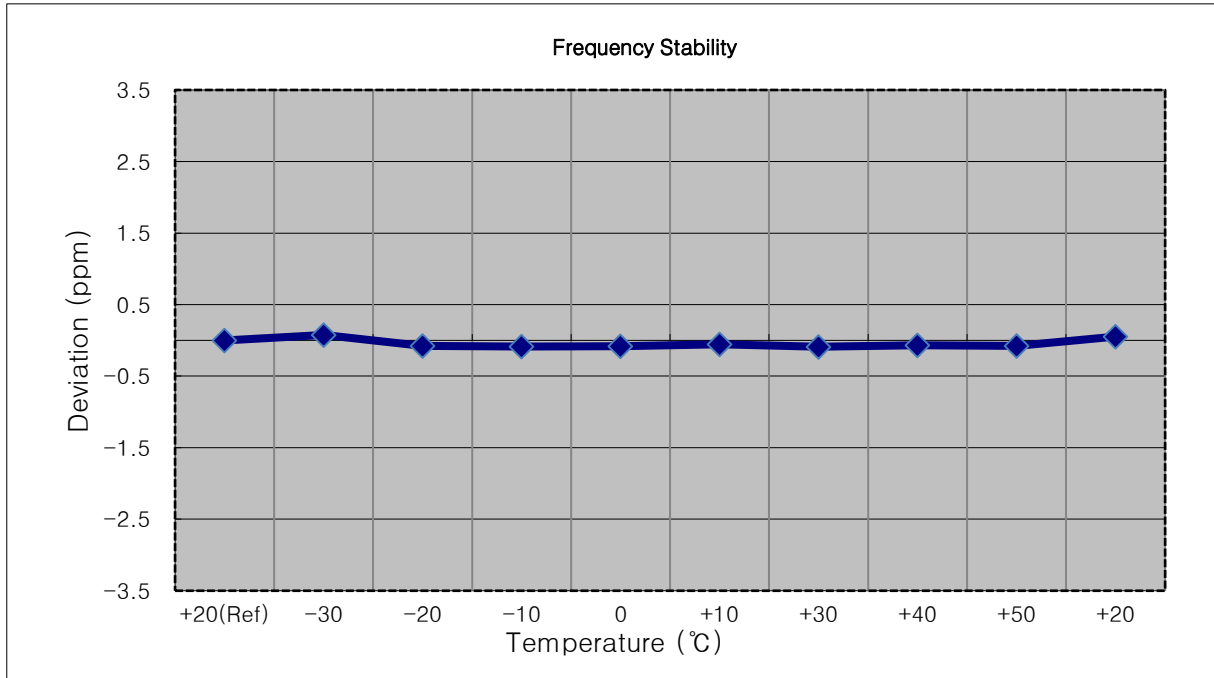


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1778,500,000 Hz
- ▣ CHANNEL: 132657 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1778 499 886	0.0	0.000 000	0.000
100 %		-30	1778 499 719	-167.2	-0.000 009	-0.094
100 %		-20	1778 499 739	-146.8	-0.000 008	-0.083
100 %		-10	1778 499 733	-153.2	-0.000 009	-0.086
100 %		0	1778 500 006	120.2	0.000 007	0.068
100 %		+10	1778 499 994	108.4	0.000 006	0.061
100 %		+30	1778 500 025	138.8	0.000 008	0.078
100 %		+40	1778 499 766	-119.8	-0.000 007	-0.067
100 %		+50	1778 500 043	156.8	0.000 009	0.088
Batt. Endpoint	3.650	+20	1778 499 995	109.4	0.000 006	0.062

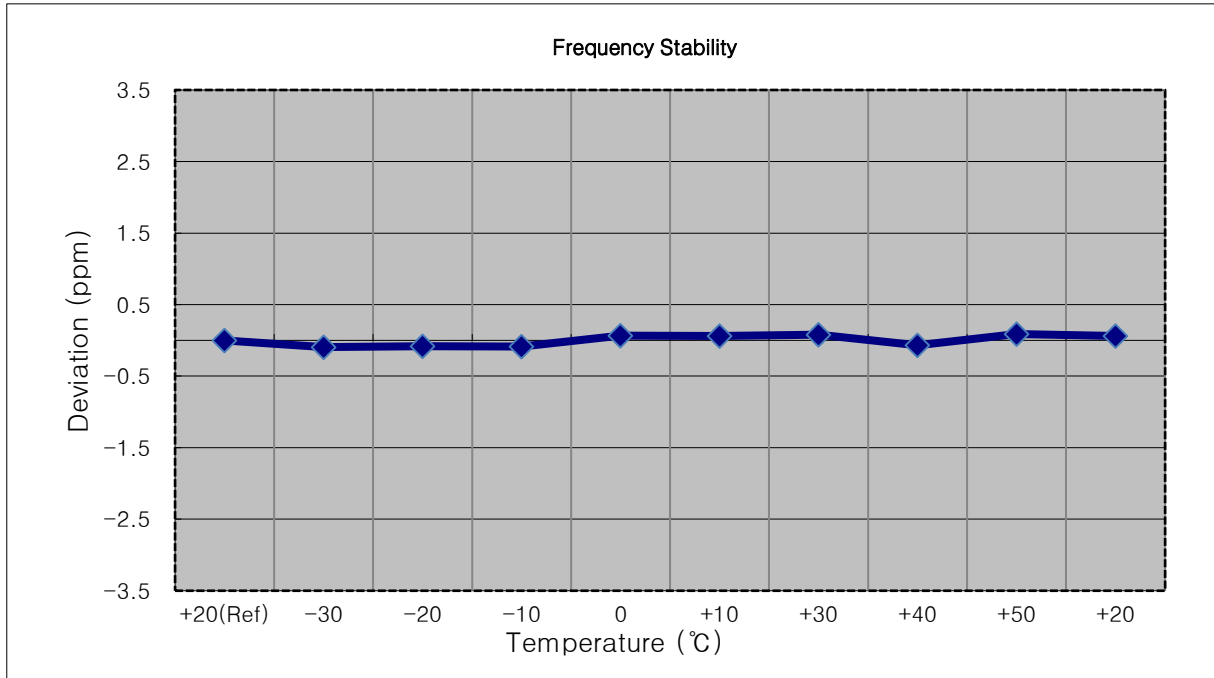


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1777,500,000 Hz
- ▣ CHANNEL: 132647 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1777 499 886	0.0	0.000 000	0.000
100 %		-30	1777 499 727	-159.5	-0.000 009	-0.090
100 %		-20	1777 499 754	-132.5	-0.000 007	-0.075
100 %		-10	1777 499 746	-140.3	-0.000 008	-0.079
100 %		0	1777 499 744	-142.0	-0.000 008	-0.080
100 %		+10	1777 499 991	104.2	0.000 006	0.059
100 %		+30	1777 500 013	126.5	0.000 007	0.071
100 %		+40	1777 499 988	101.8	0.000 006	0.057
100 %		+50	1777 499 736	-150.5	-0.000 008	-0.085
Batt. Endpoint	3.650	+20	1777 500 022	135.4	0.000 008	0.076

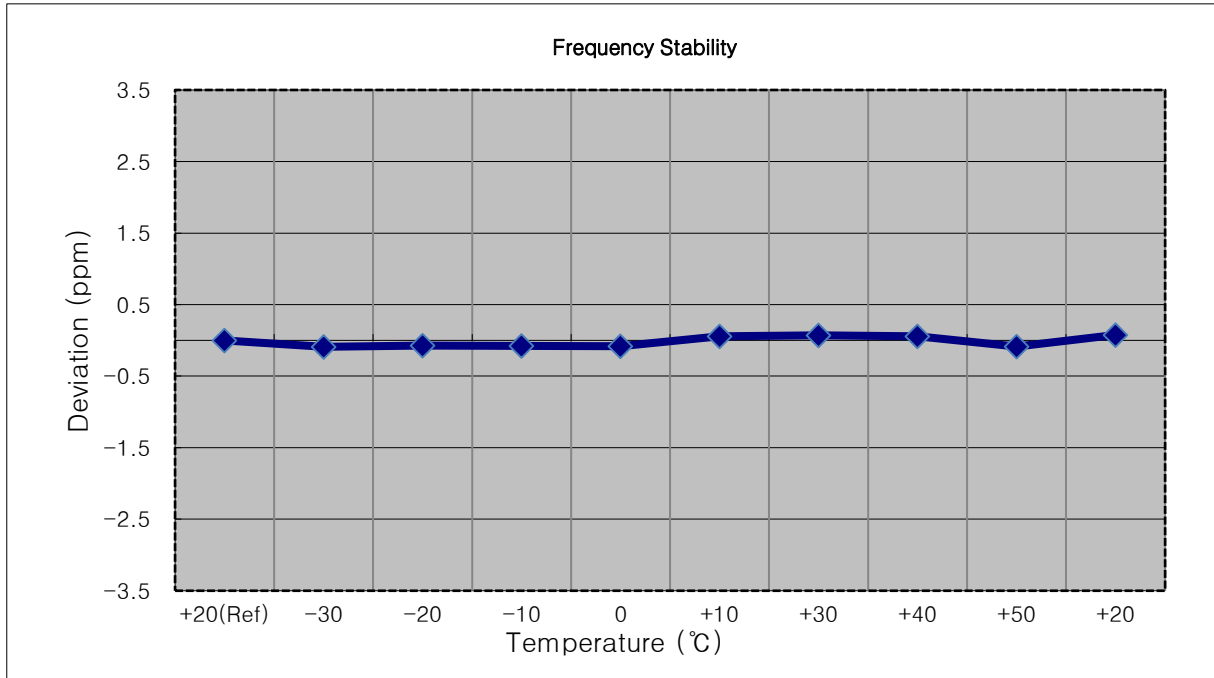


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1775,000,000 Hz
- ▣ CHANNEL: 132622 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1774 999 869	0.0	0.000 000	0.000
100 %		-30	1775 000 027	158.6	0.000 009	0.089
100 %		-20	1774 999 698	-171.0	-0.000 010	-0.096
100 %		-10	1774 999 772	-96.9	-0.000 005	-0.055
100 %		0	1774 999 706	-162.7	-0.000 009	-0.092
100 %		+10	1775 000 003	134.5	0.000 008	0.076
100 %		+30	1774 999 723	-145.9	-0.000 008	-0.082
100 %		+40	1774 999 688	-181.1	-0.000 010	-0.102
100 %		+50	1774 999 705	-164.1	-0.000 009	-0.092
Batt. Endpoint		3.650	+20	1774 999 706	-163.1	-0.000 009

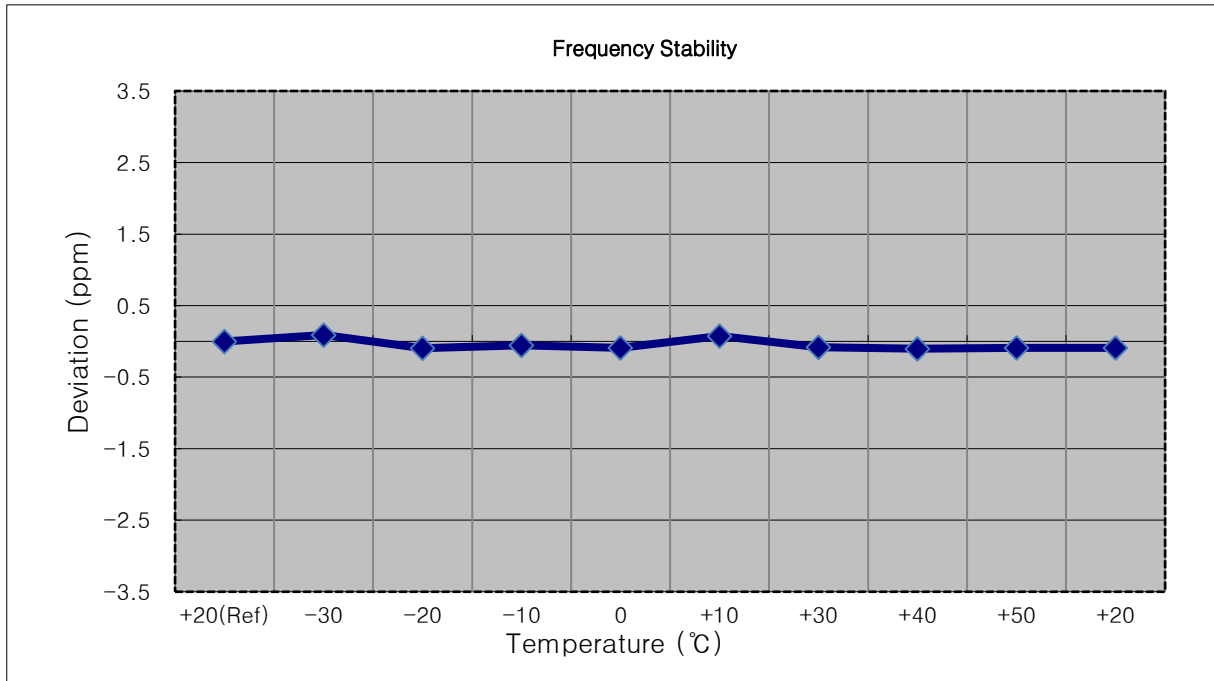


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1772,500,000 Hz
- ▣ CHANNEL: 132597 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1772 499 820	0.0	0.000 000	0.000
100 %		-30	1772 499 626	-193.6	-0.000 011	-0.109
100 %		-20	1772 499 688	-131.5	-0.000 007	-0.074
100 %		-10	1772 499 638	-181.6	-0.000 010	-0.102
100 %		0	1772 499 701	-119.1	-0.000 007	-0.067
100 %		+10	1772 499 614	-205.6	-0.000 012	-0.116
100 %		+30	1772 499 639	-181.3	-0.000 010	-0.102
100 %		+40	1772 499 989	169.1	0.000 010	0.095
100 %		+50	1772 499 980	159.8	0.000 009	0.090
Batt. Endpoint		3.650	+20	1772 499 993	173.5	0.000 010

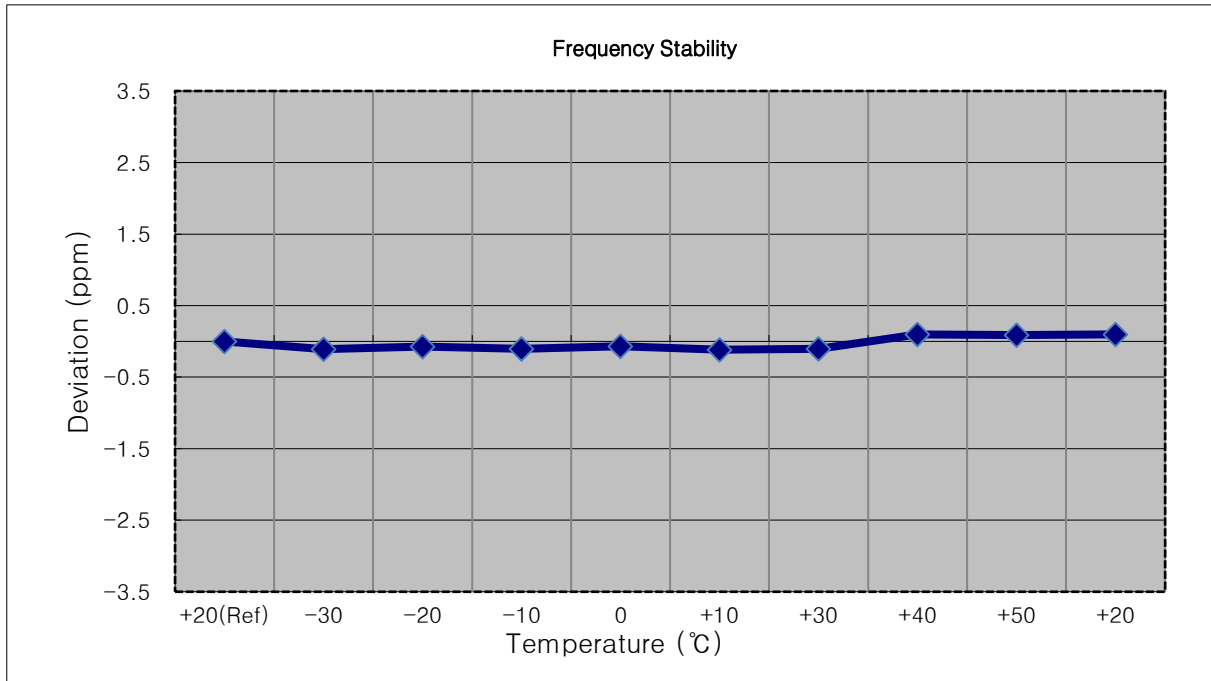

- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1770,000,000 Hz
- ▣ CHANNEL: 132572 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1770 000 124	0.0	0.000 000	0.000
100 %		-30	1769 999 926	-198.2	-0.000 011	-0.112
100 %		-20	1769 999 909	-215.8	-0.000 012	-0.122
100 %		-10	1769 999 903	-221.3	-0.000 013	-0.125
100 %		0	1769 999 906	-218.6	-0.000 012	-0.124
100 %		+10	1770 000 301	176.2	0.000 010	0.100
100 %		+30	1770 000 271	147.0	0.000 008	0.083
100 %		+40	1769 999 921	-203.5	-0.000 011	-0.115
100 %		+50	1769 999 909	-215.2	-0.000 012	-0.122
Batt. Endpoint	3.650	+20	1769 999 930	-194.0	-0.000 011	-0.110

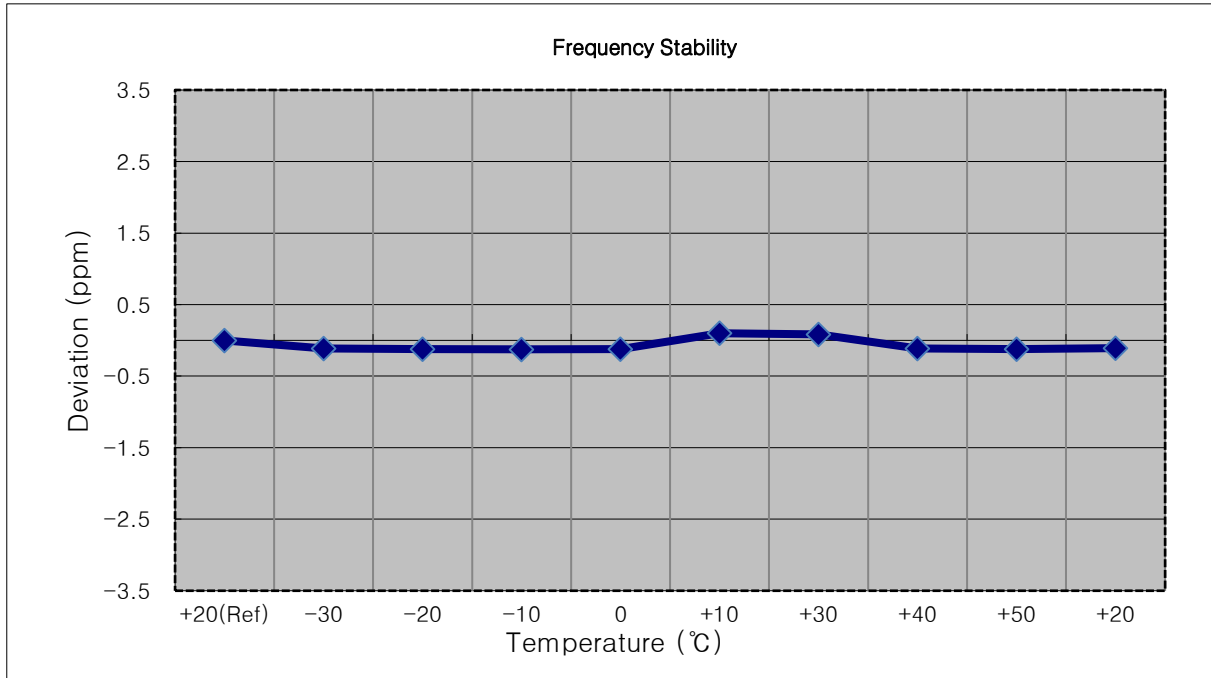


9. TEST PLOTS

BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(1)



BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

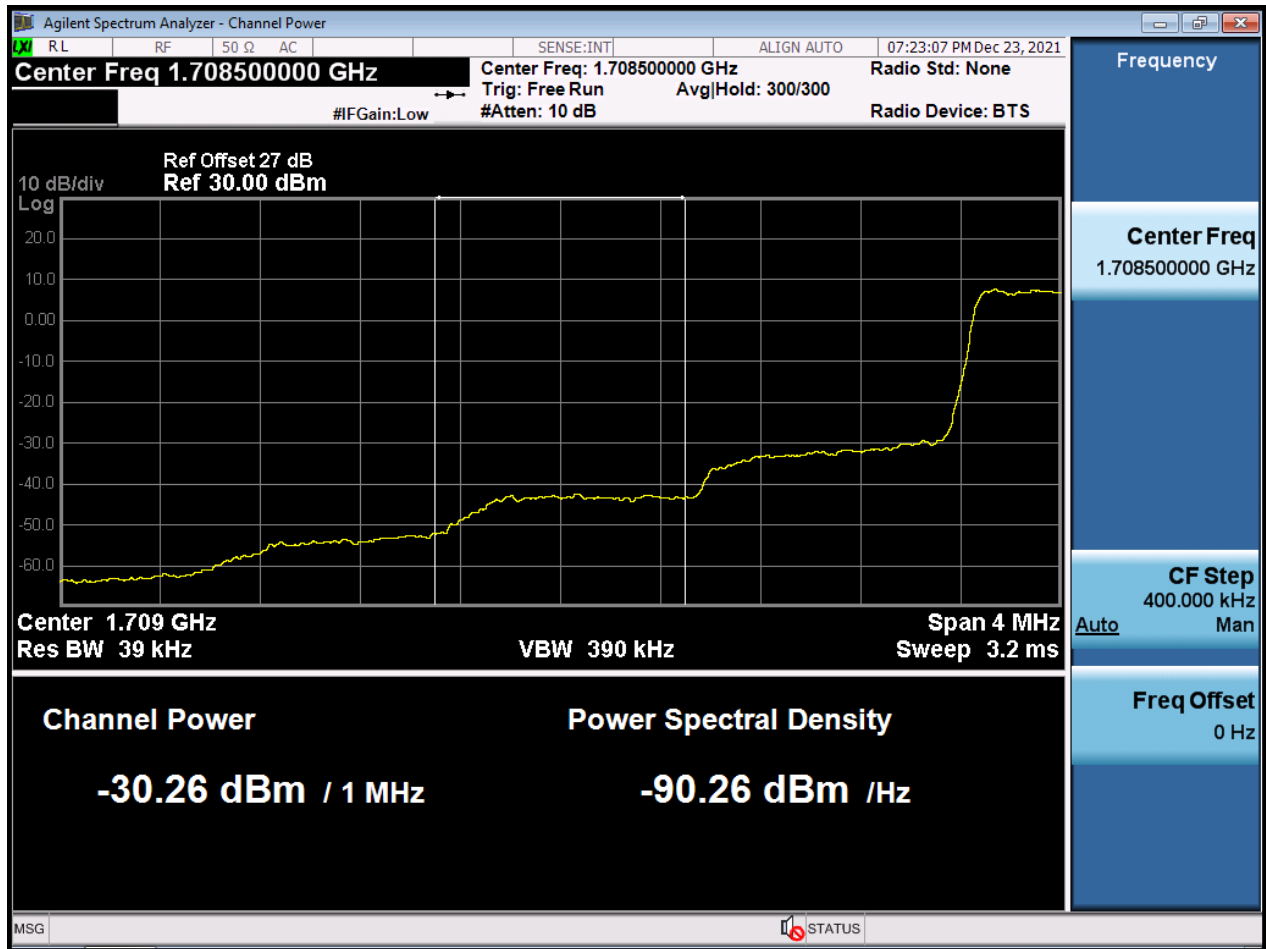


BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(1)




BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(2)




BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB

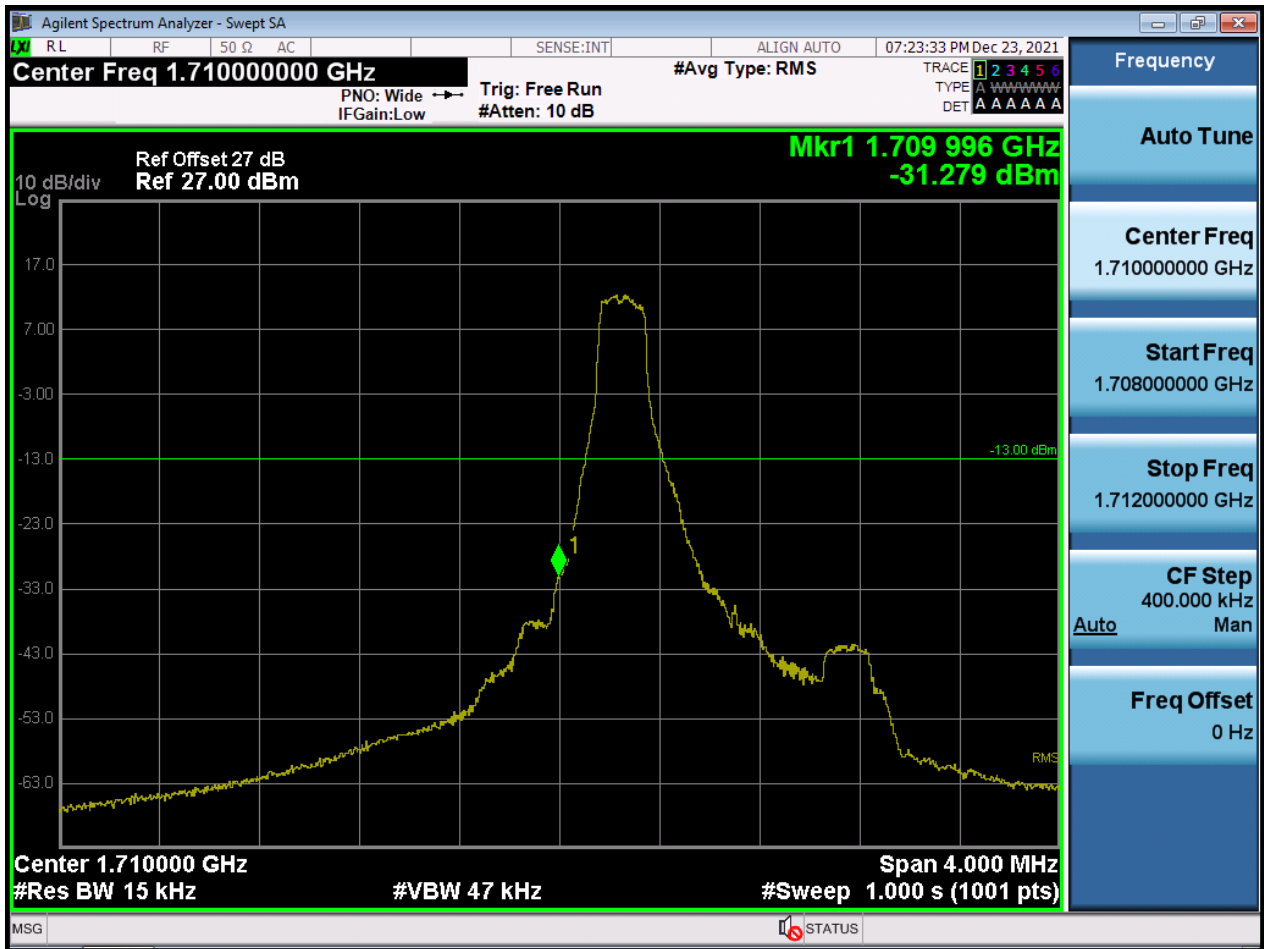


BW1.4 M_BandEdge_Highest Channel_QPSK_1RB

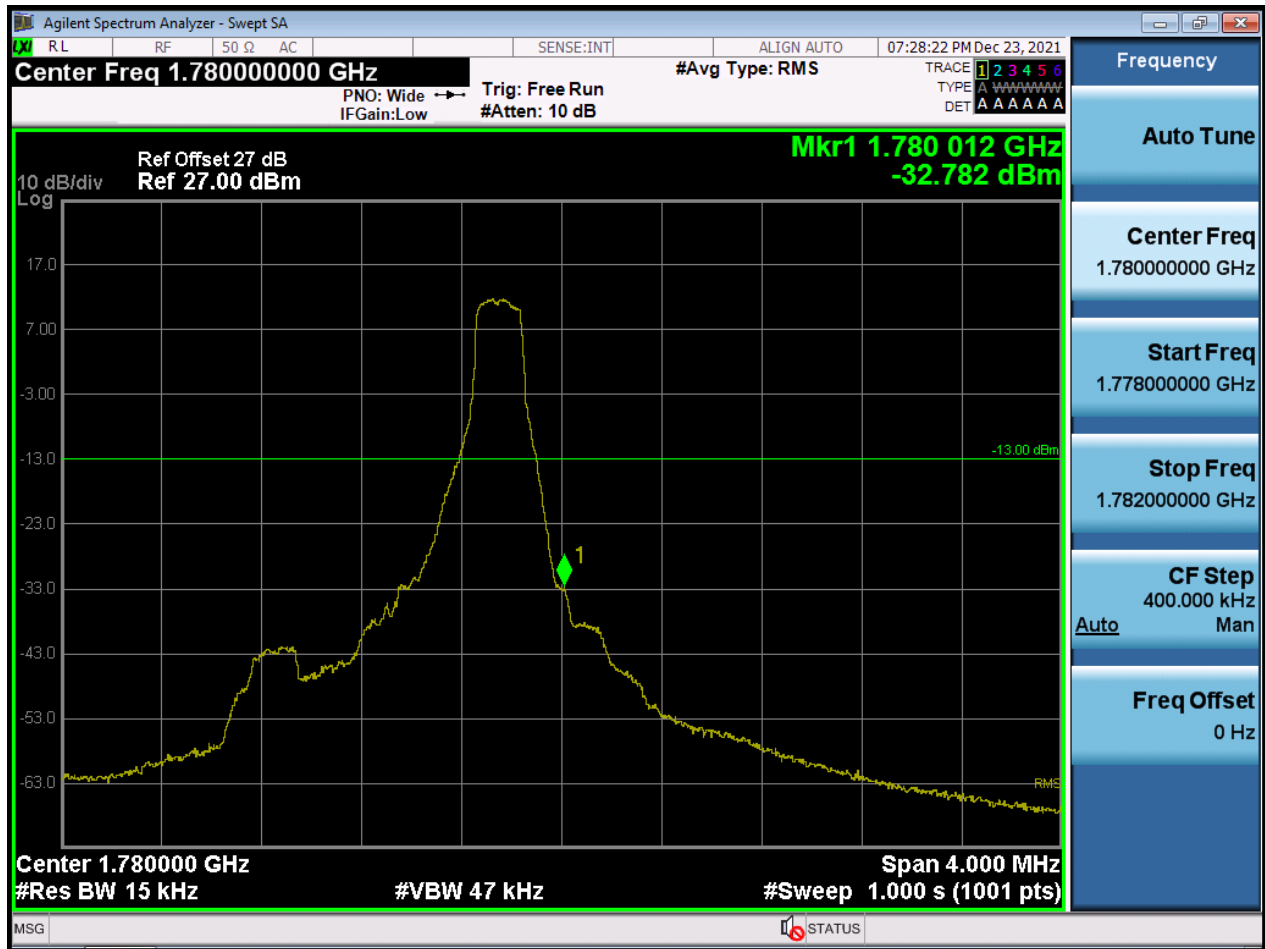

BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)

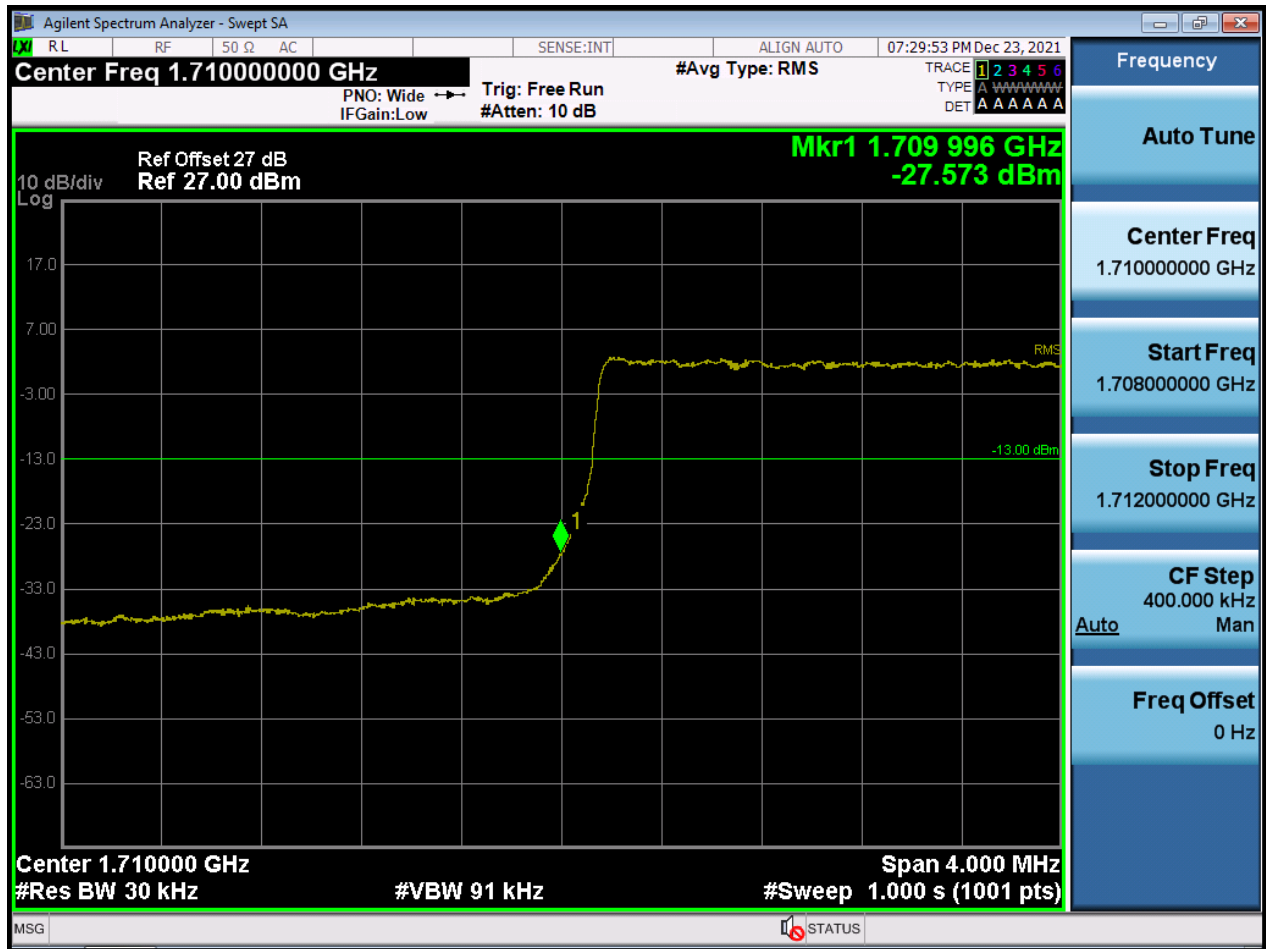


BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

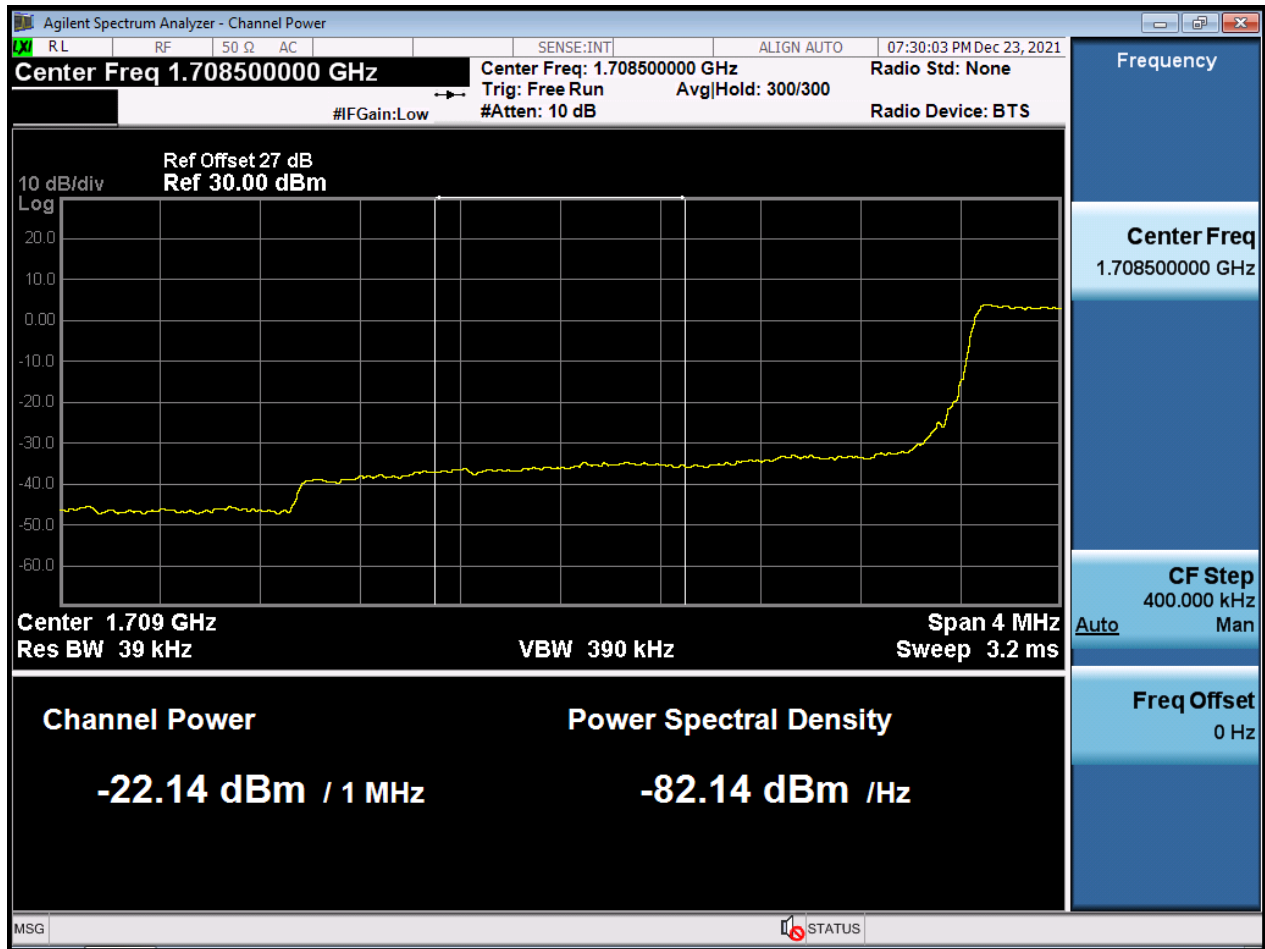


BW3 M_BandEdge_Highest Channel_QPSK_FullRB(1)




BW3 M_BandEdge_Highest Channel_QPSK_FullRB(2)

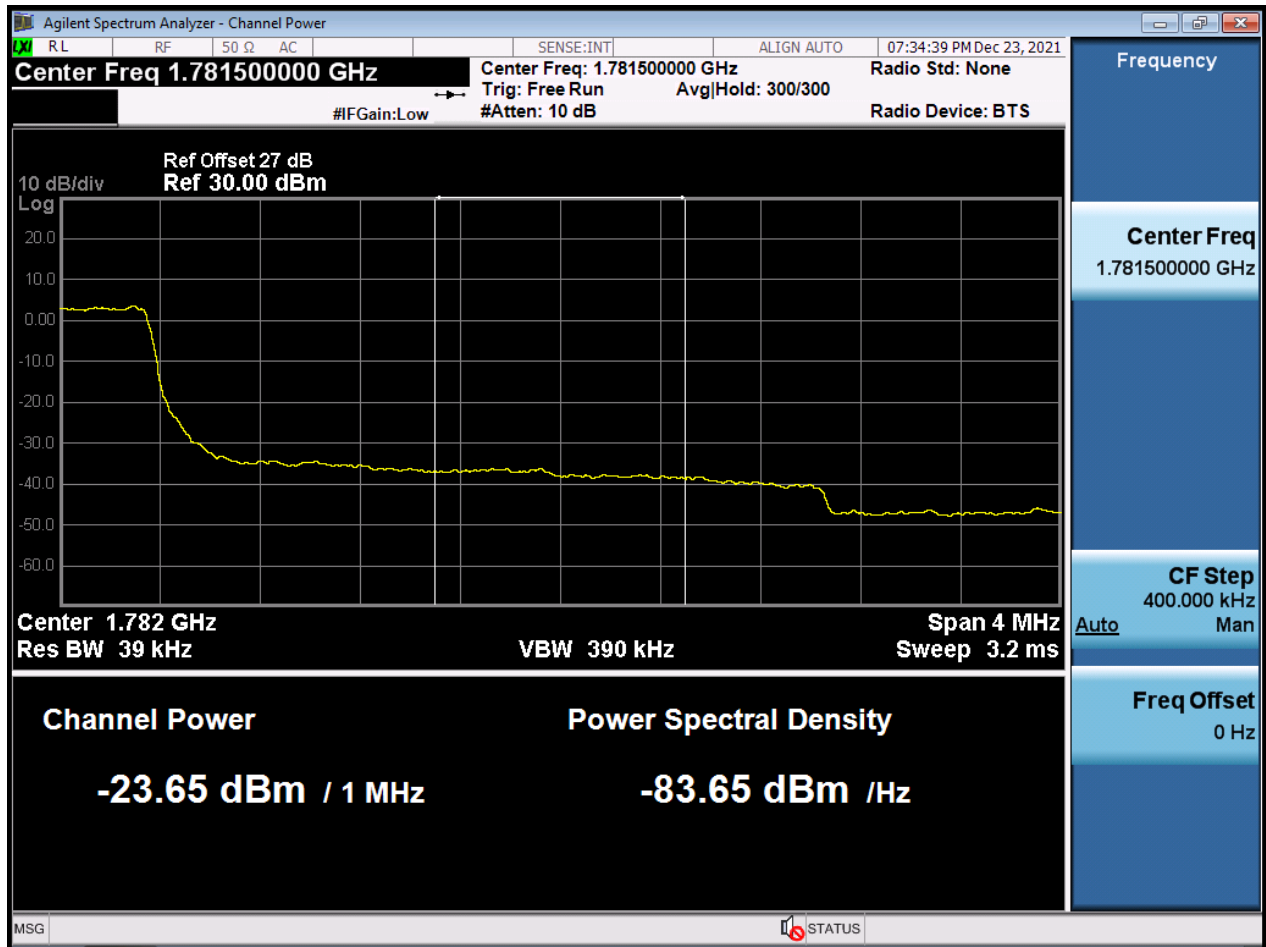

BW3 M_BandEdge_Lowest Channel_QPSK_1RB

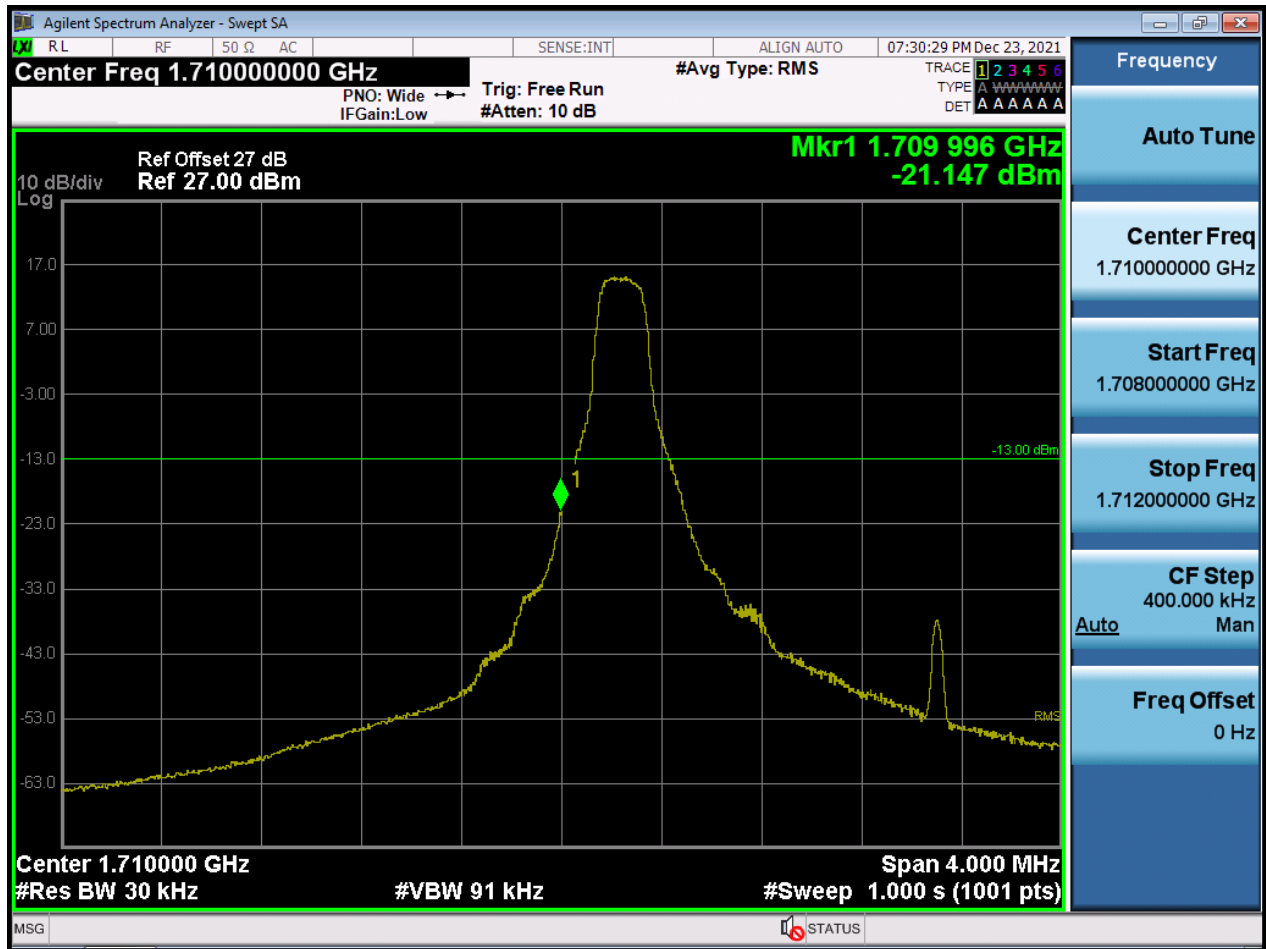


BW3 M_BandEdge_Highest Channel_QPSK_1RB

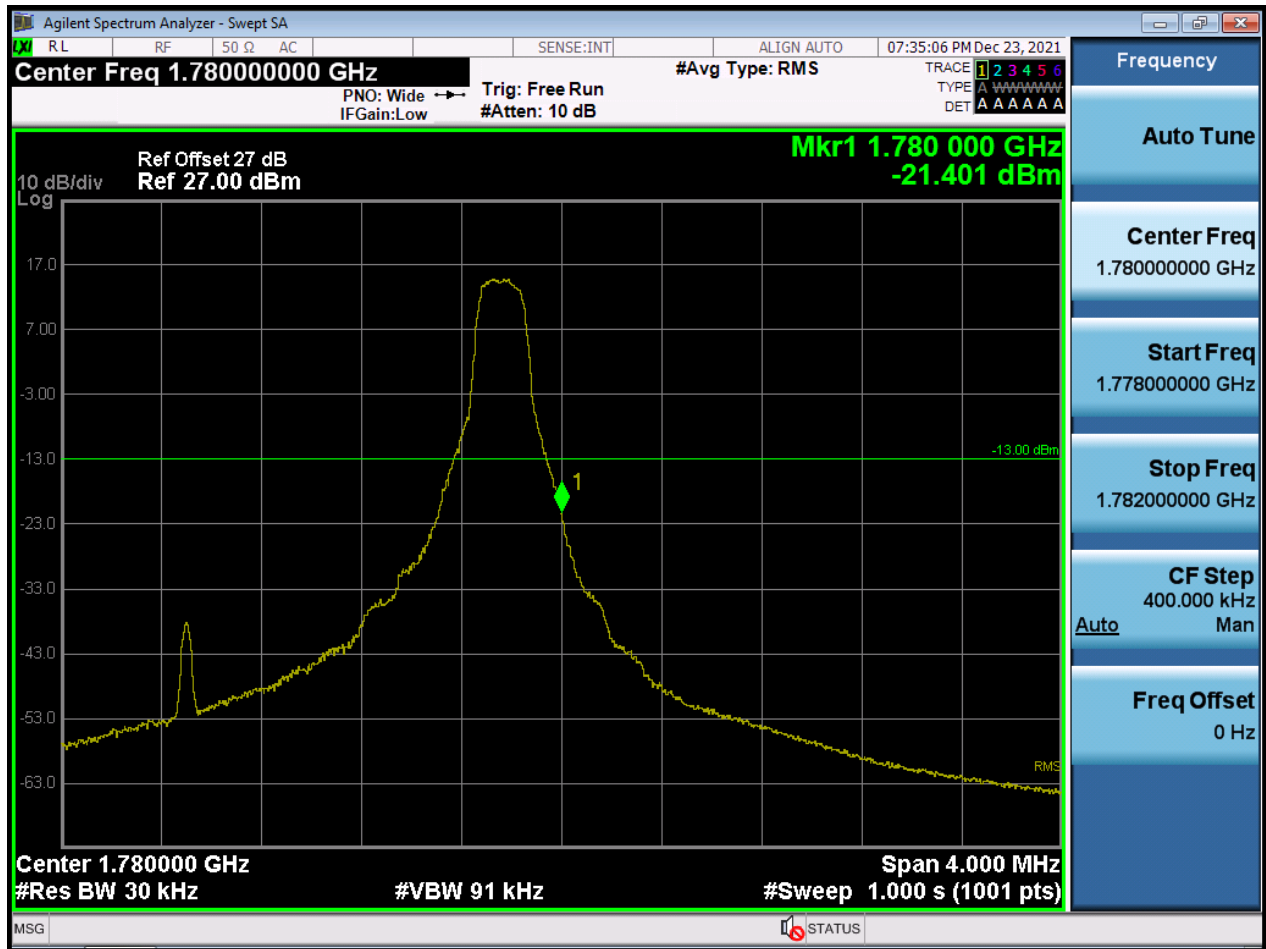

BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

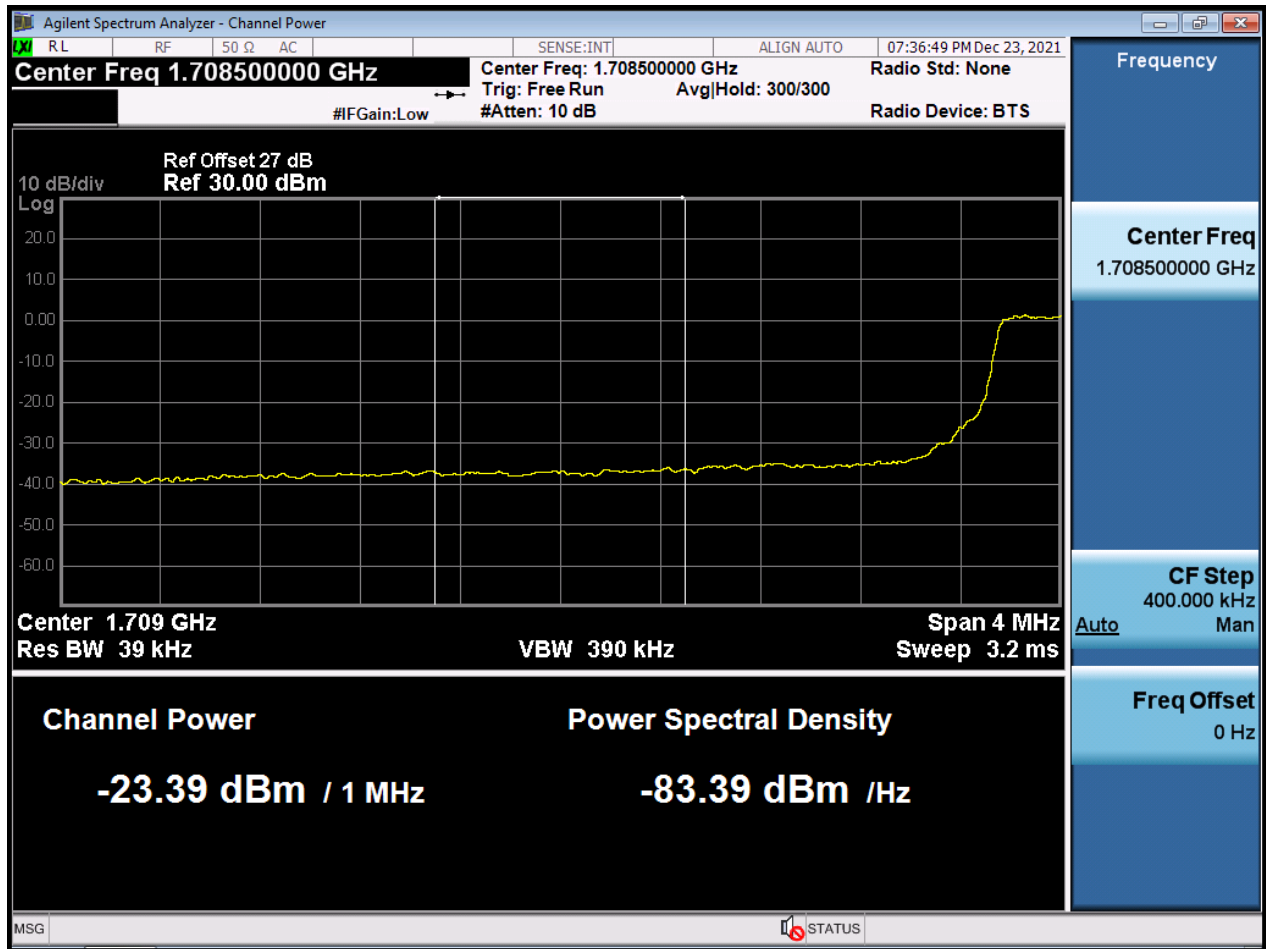


BW5 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW5 M_BandEdge_Highest Channel_QPSK_FullRB(2)

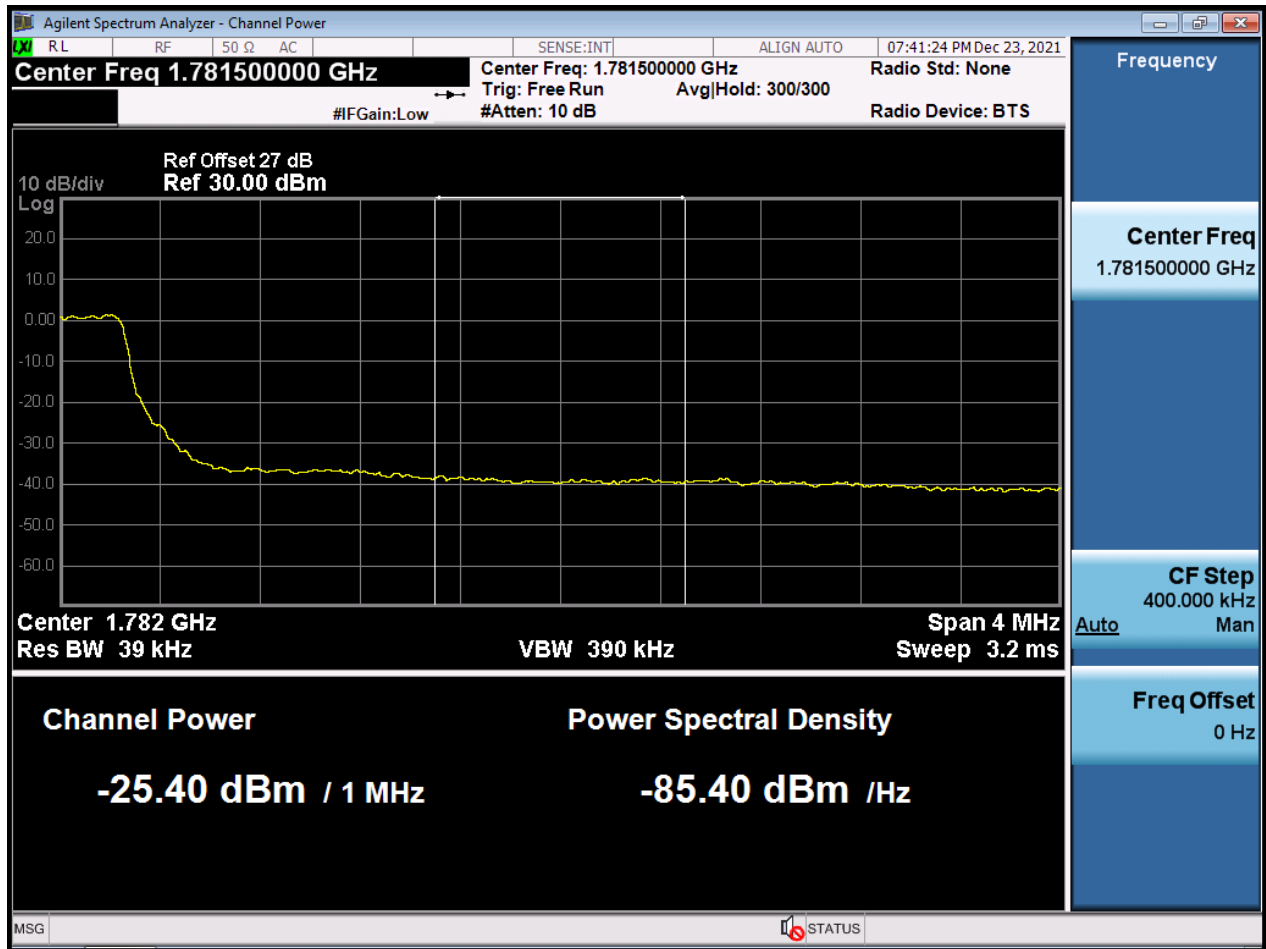

BW5 M_BandEdge_Lowest Channel_QPSK_1RB

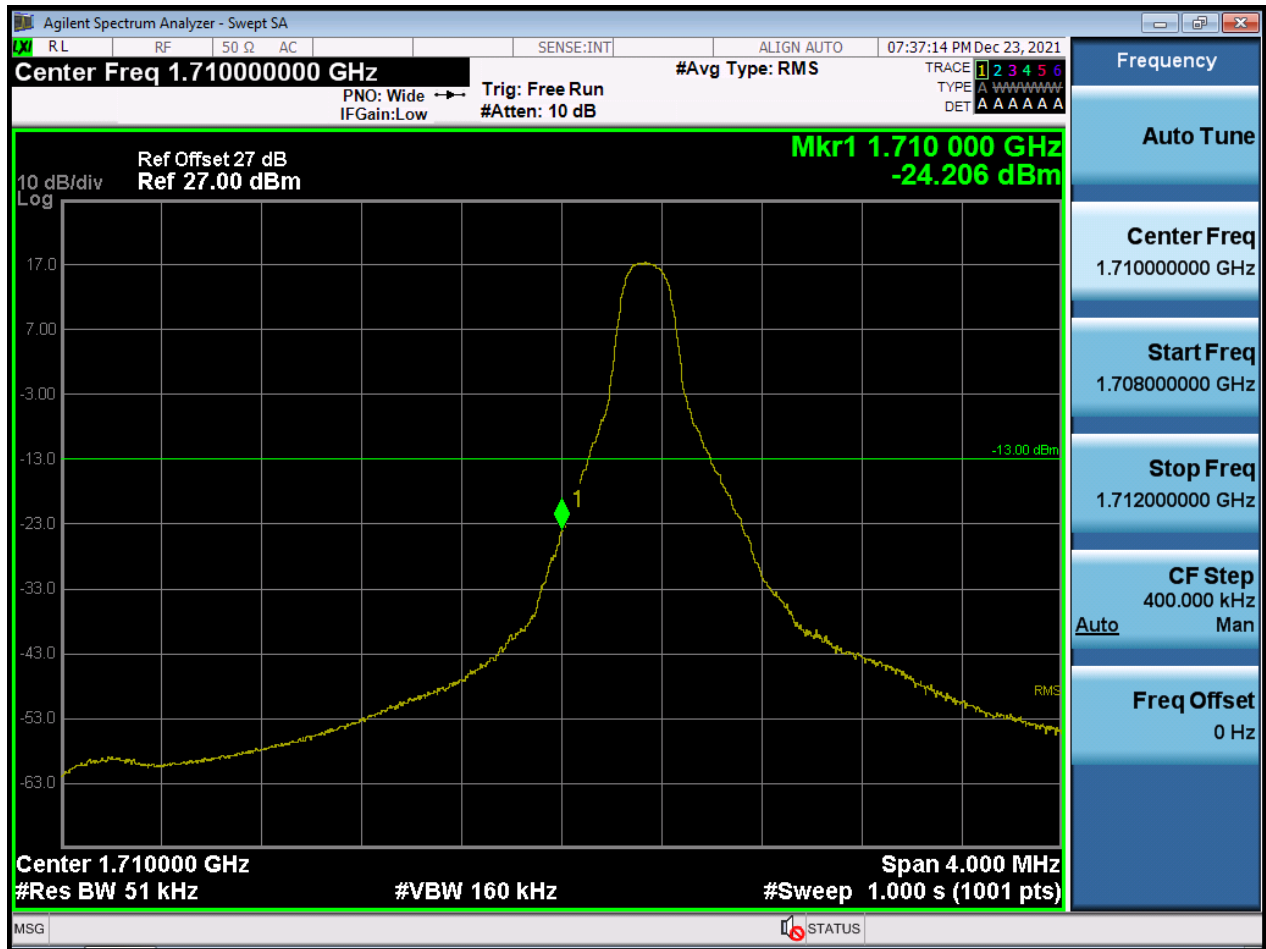


BW5 M_BandEdge_Highest Channel_QPSK_1RB



BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW10 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

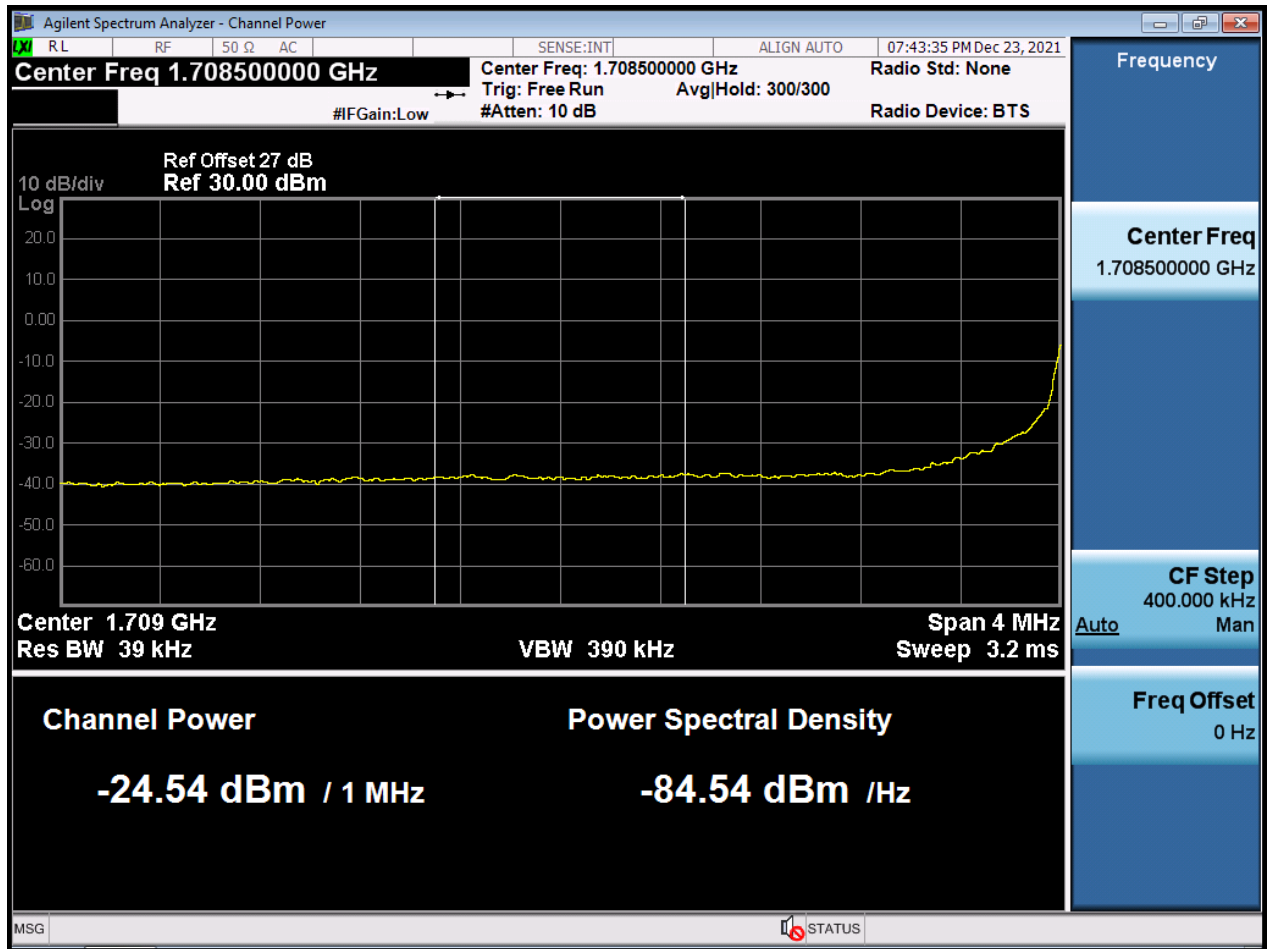

BW10 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW10 M_BandEdge_Highest Channel_QPSK_FullRB(2)

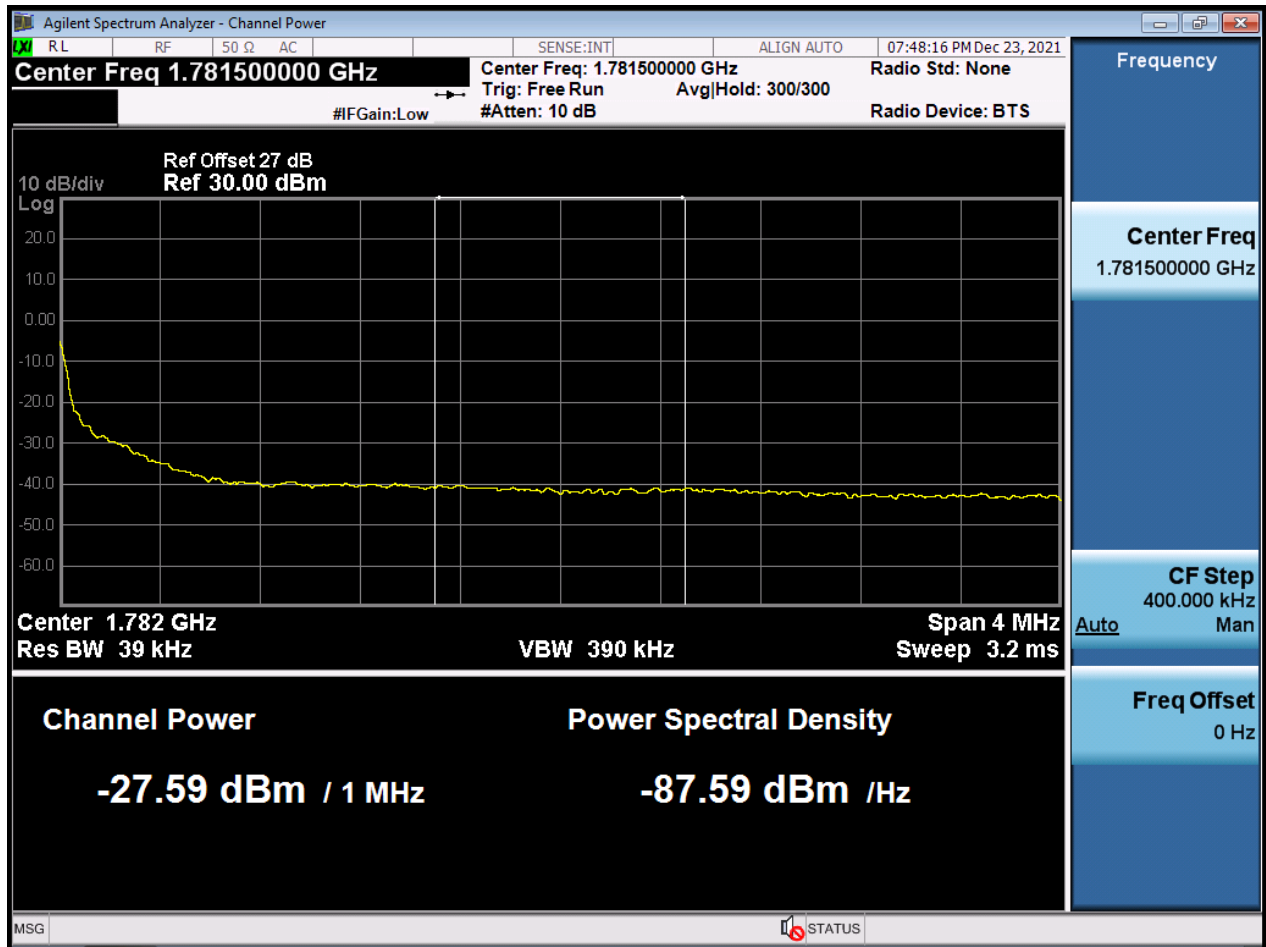


BW10 M_BandEdge_Highest Channel_QPSK_1RB



BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW15 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

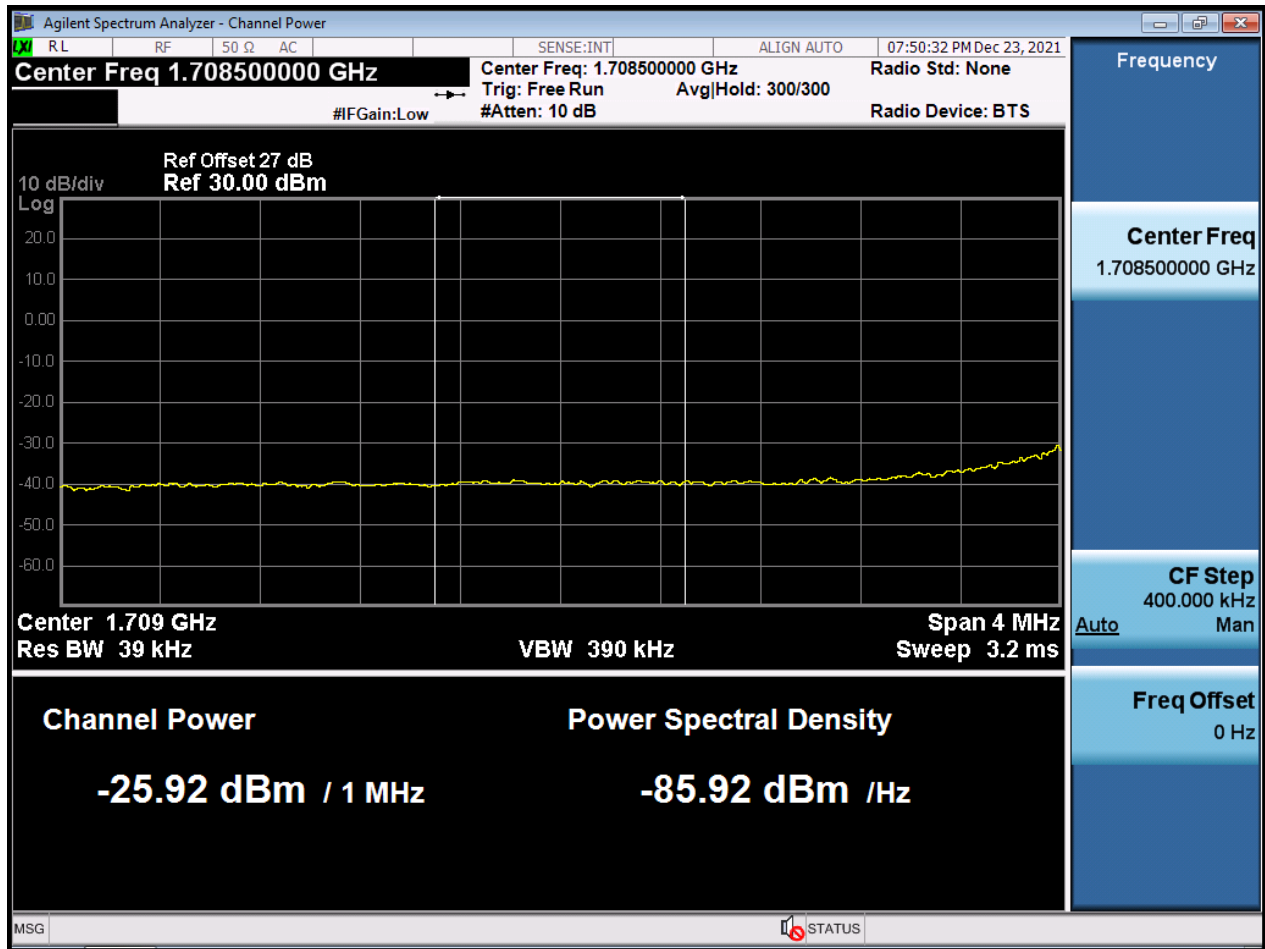

BW15 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW15 M_BandEdge_Highest Channel_QPSK_FullRB(2)

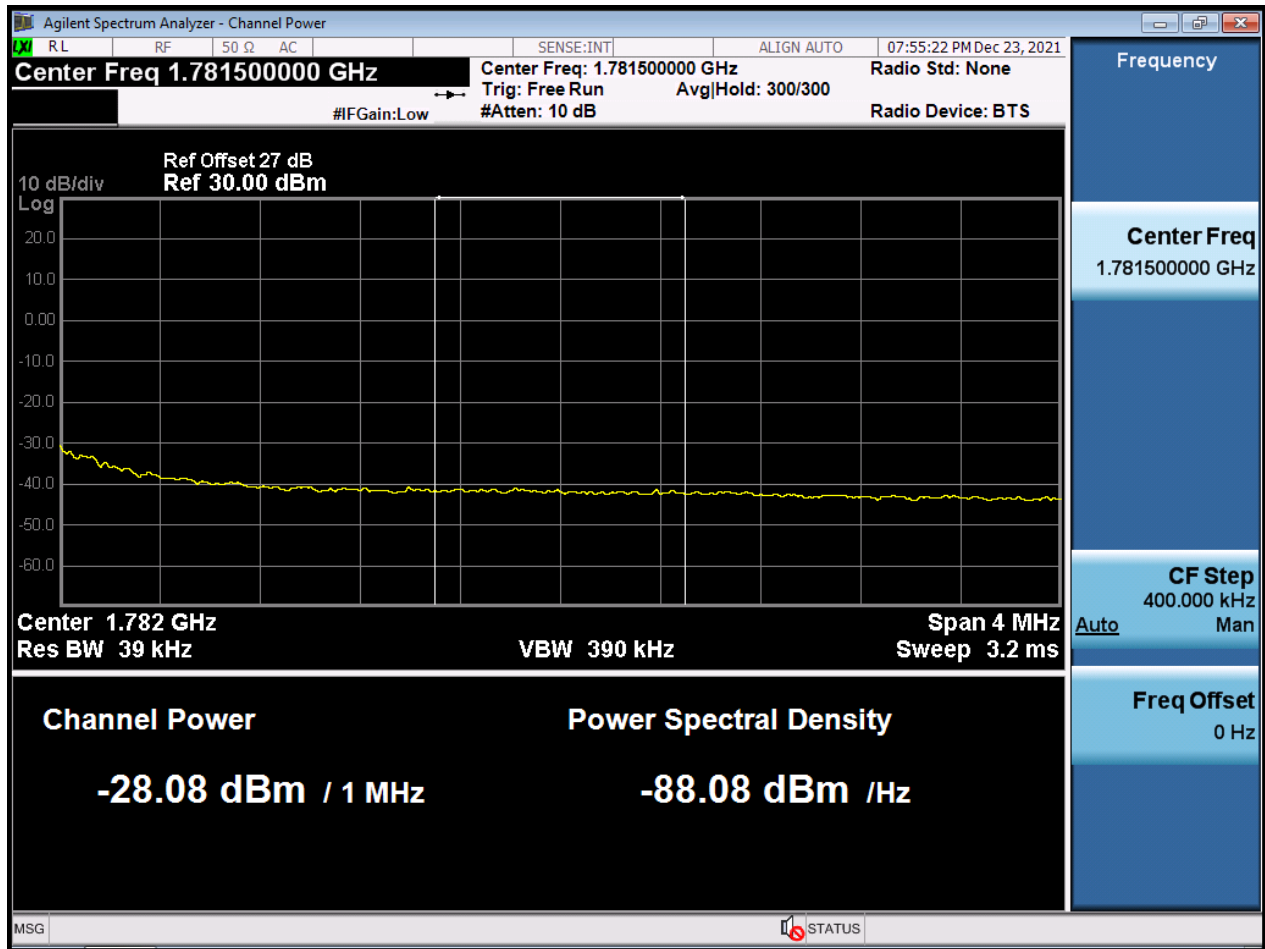

BW15 M_BandEdge_Lowest Channel_QPSK_1RB




BW15 M_BandEdge_Highest Channel_QPSK_1RB



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW20 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

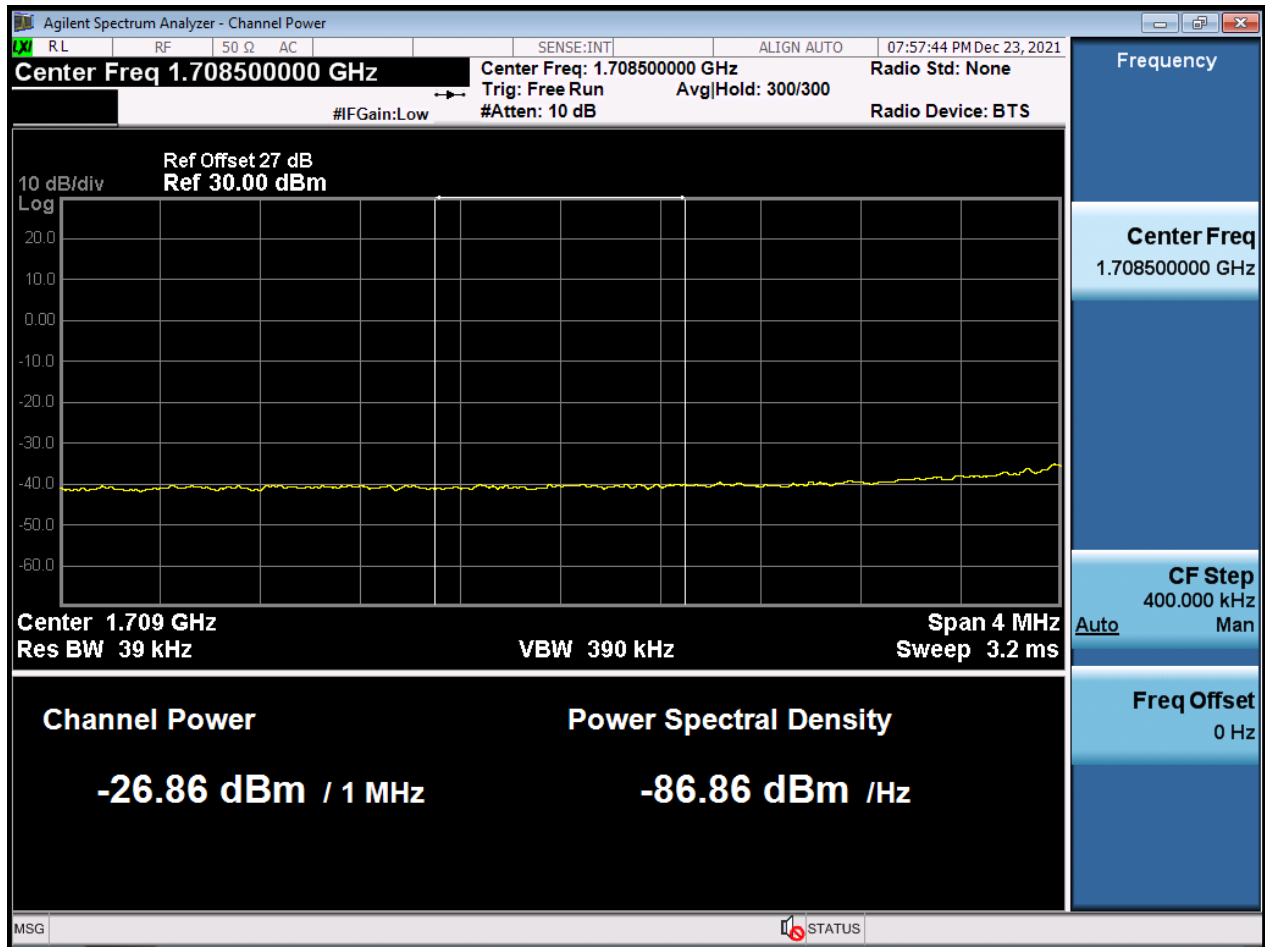

BW20 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(2)

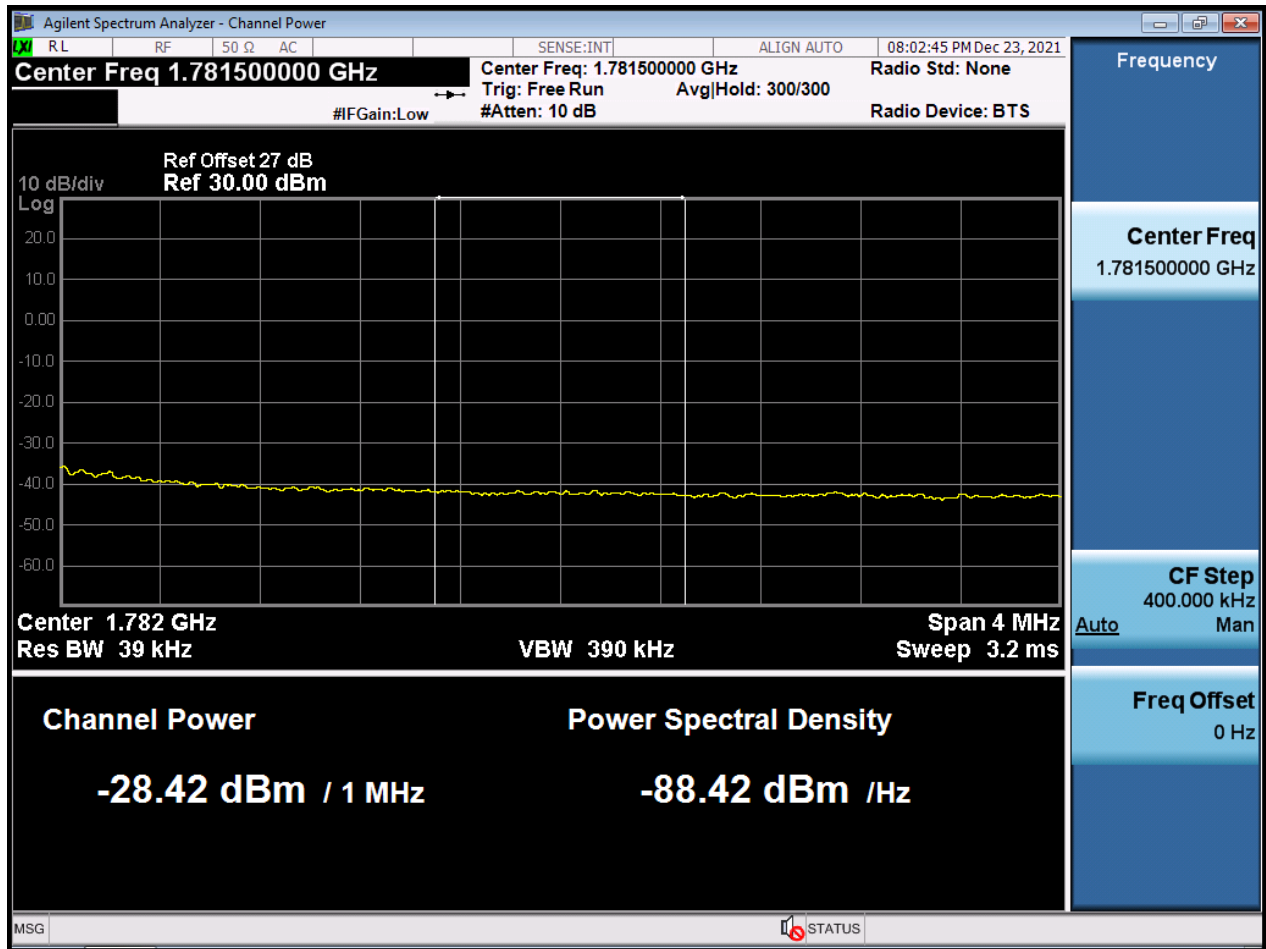


BW20 M_BandEdge_Lowest Channel_QPSK_1RB




BW20 M_BandEdge_Highest Channel_QPSK_1RB




BW1.4 M_OBW_Middle Channel_QPSK_FullRB

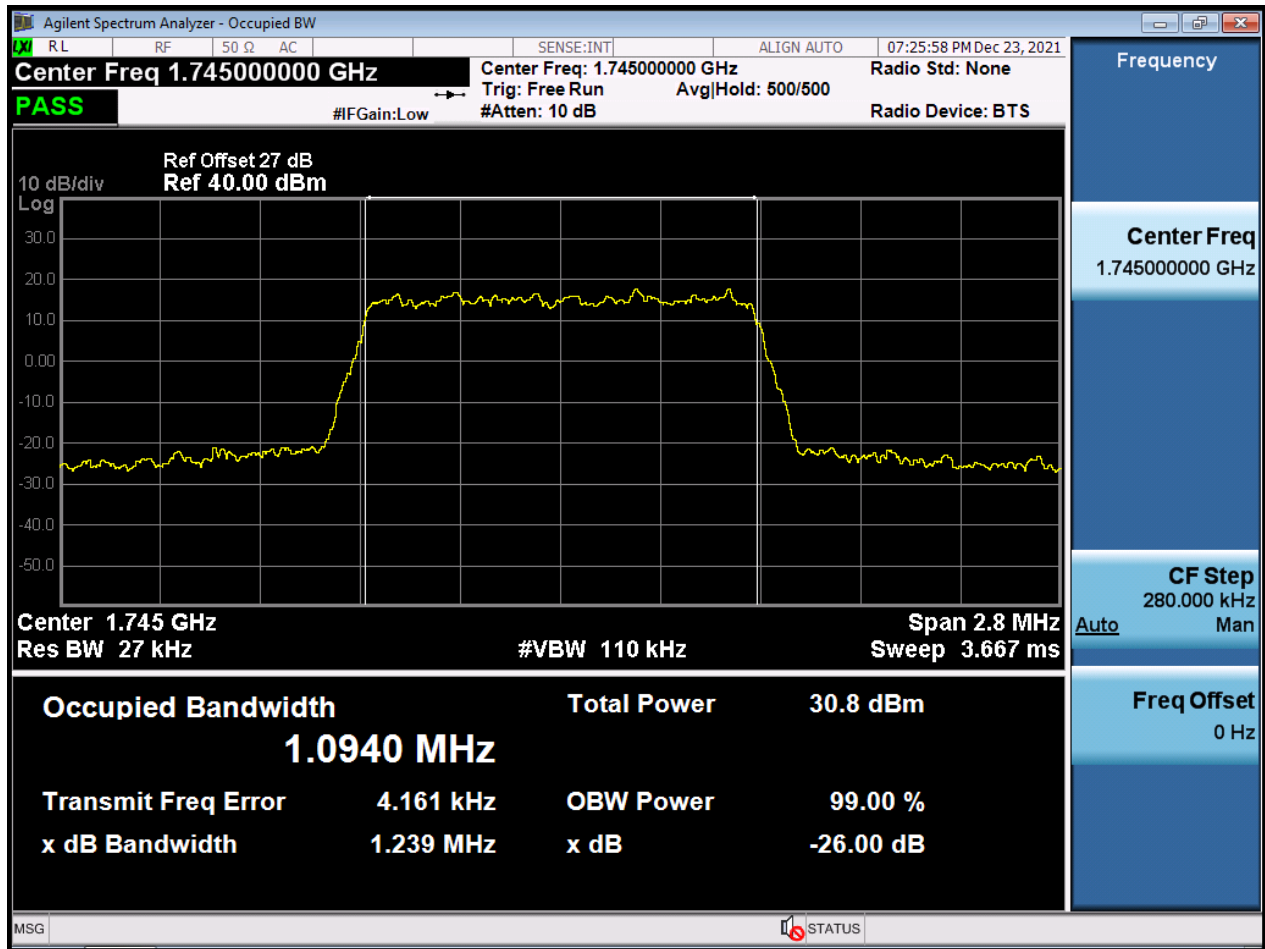


BW1.4 M_OBW_Middle Channel_16QAM_FullRB

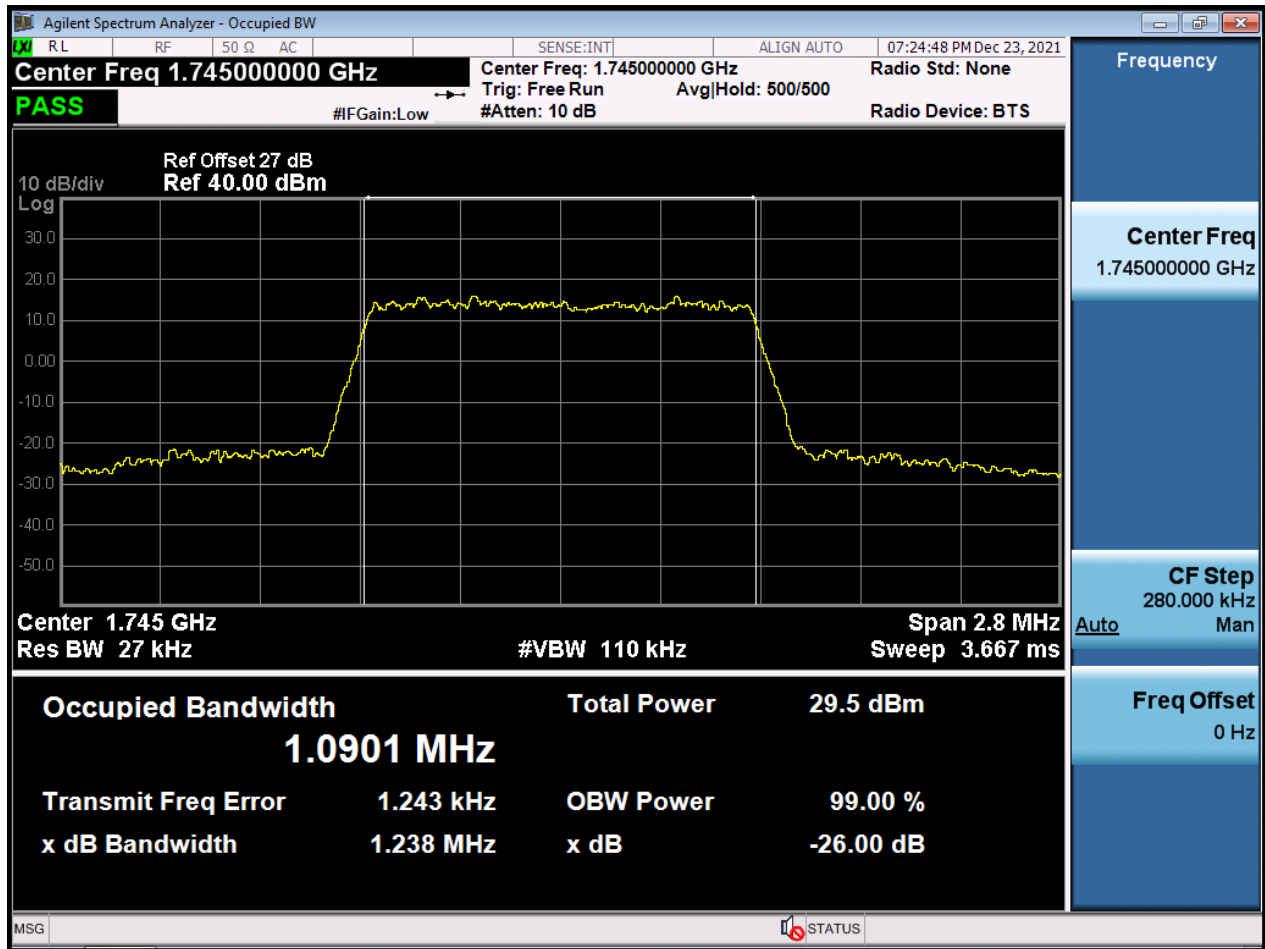


BW1.4 M_OBW_Middle Channel_64QAM_FullRB

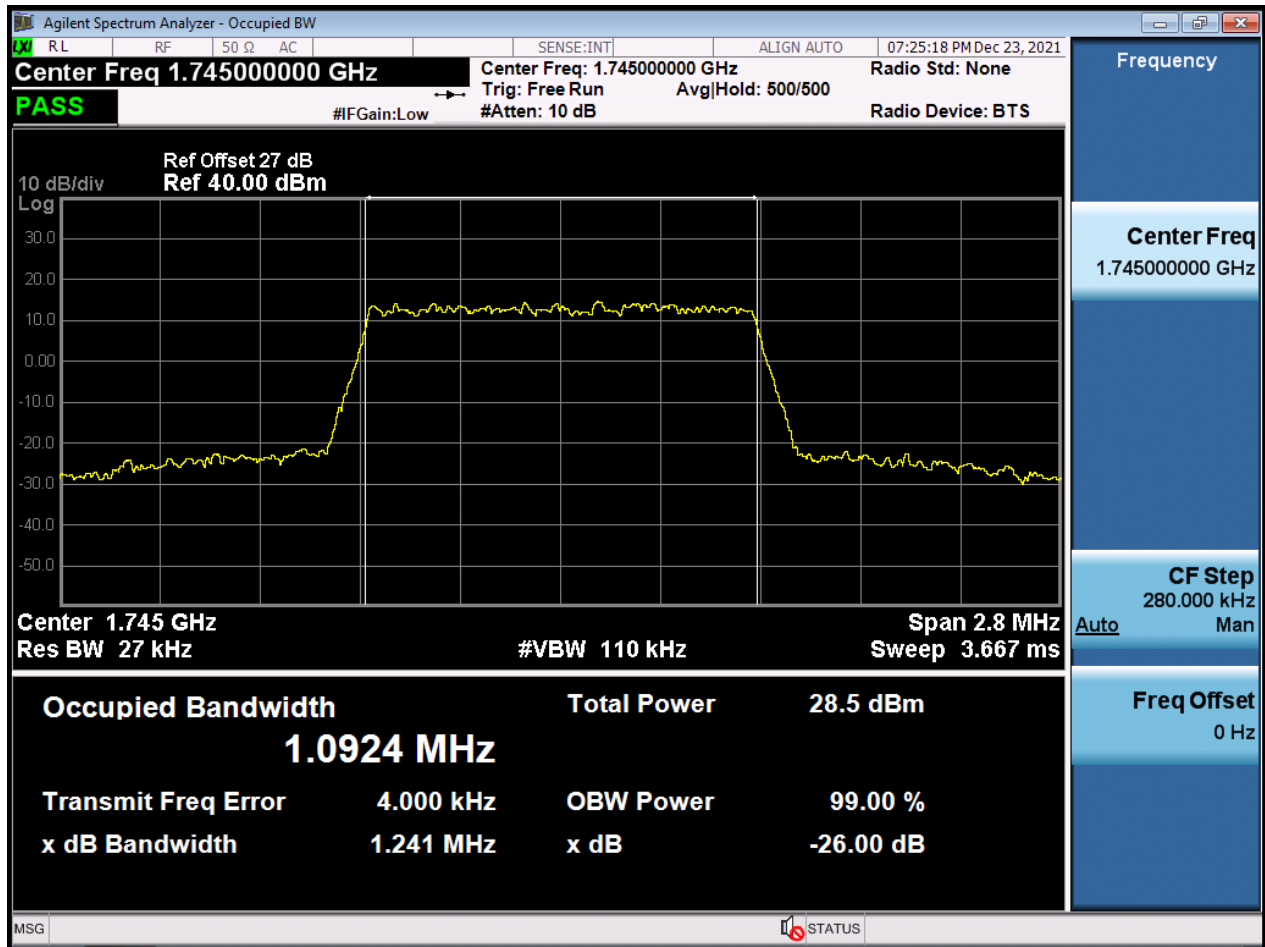


BW3 M_OBW_Middle Channel_QPSK_FullRB

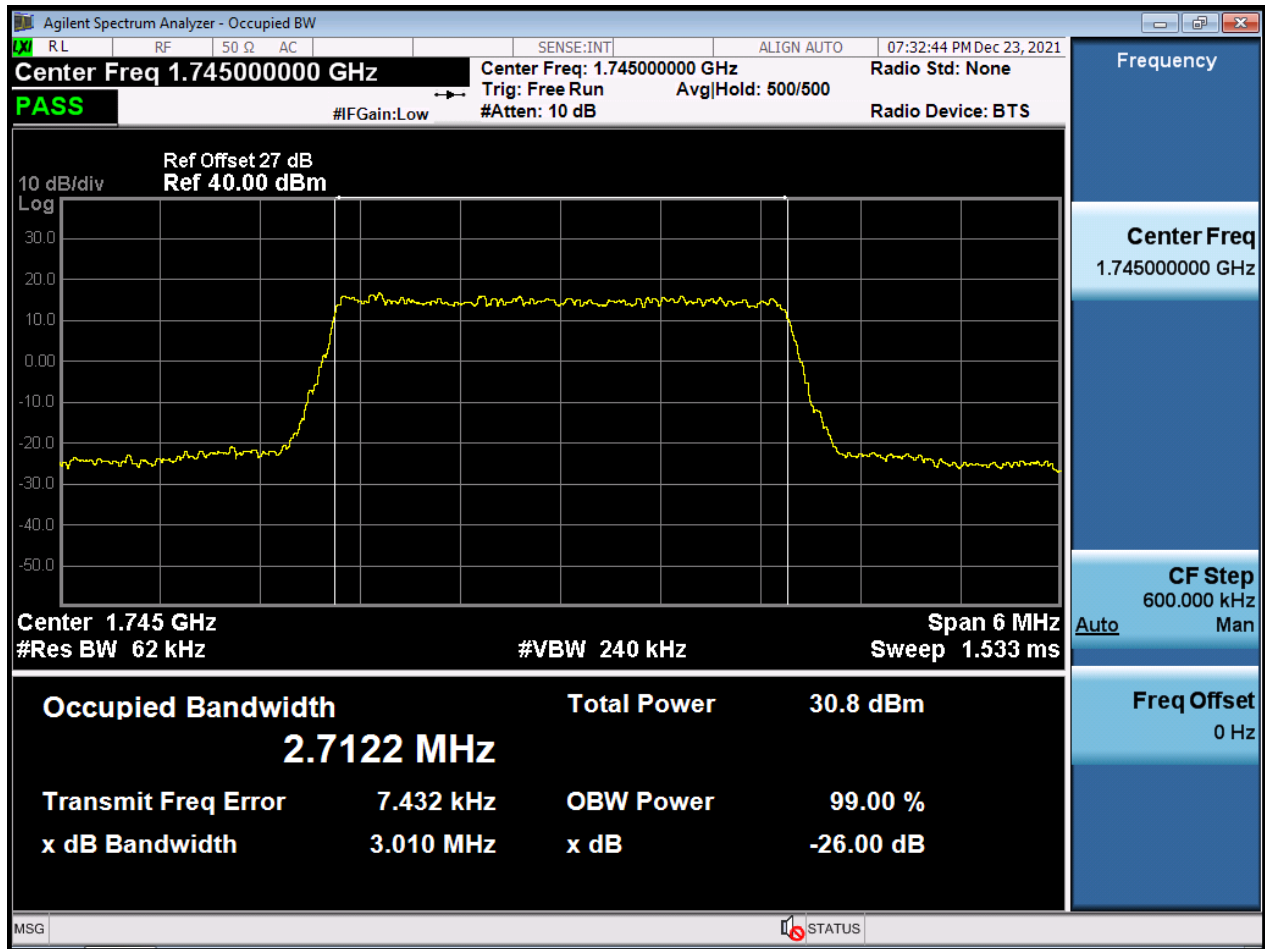


BW3 M_OBW_Middle Channel_16QAM_FullIRB

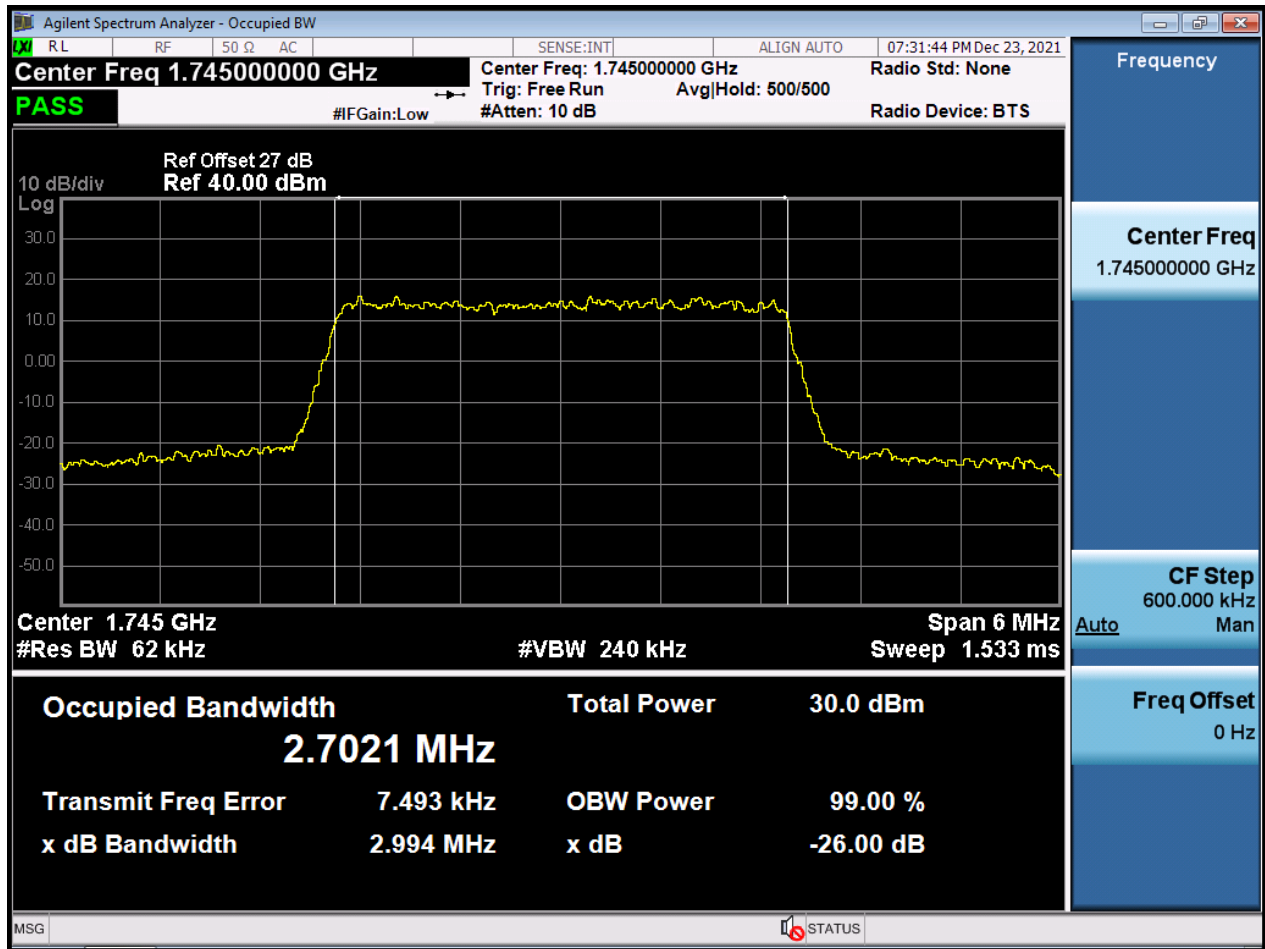


BW3 M_OBW_Middle Channel_64QAM_FullIRB

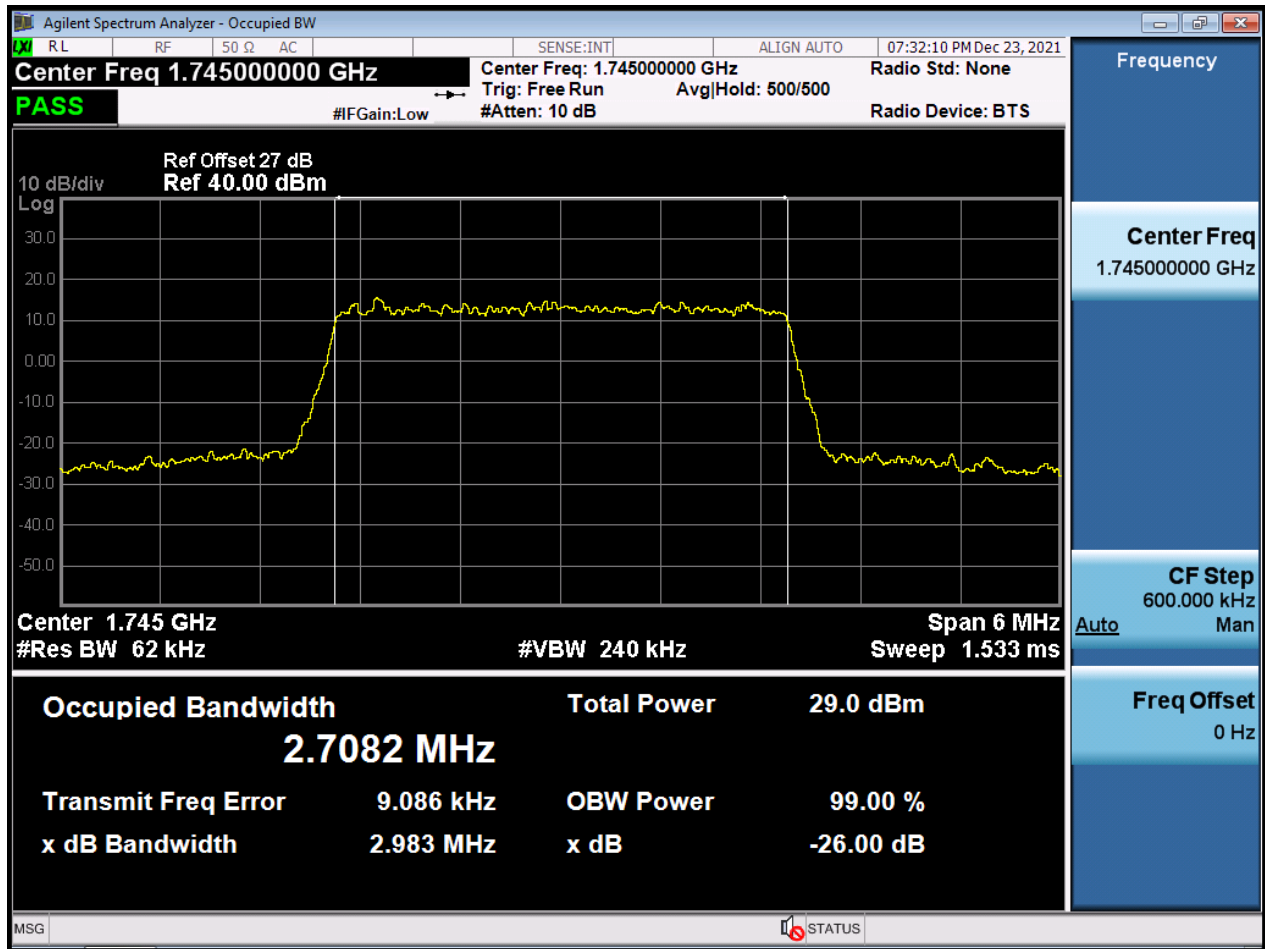


BW5 M_OBW_Middle Channel_QPSK_FullIRB

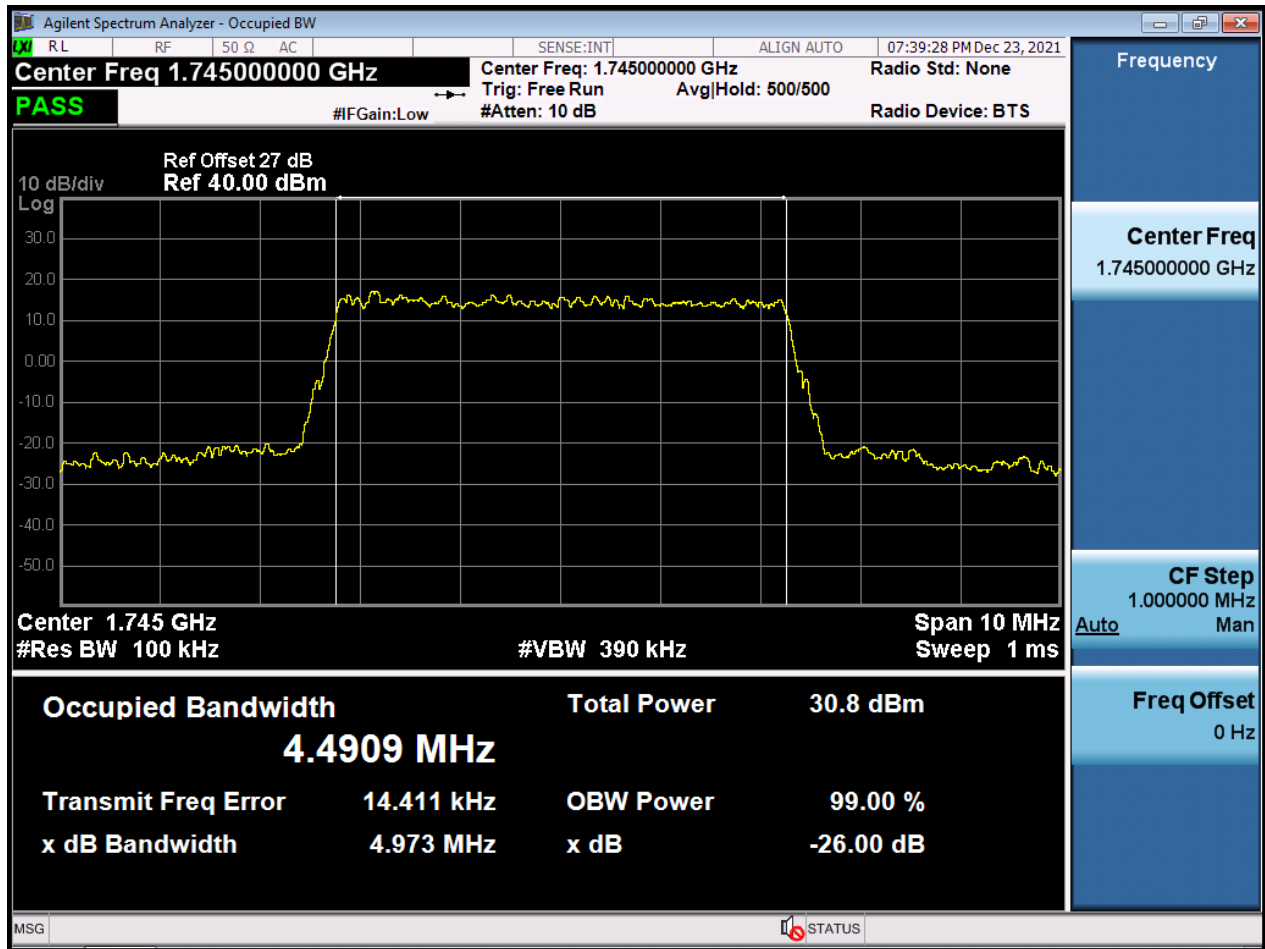


BW5 M_OBW_Middle Channel_16QAM_FullIRB

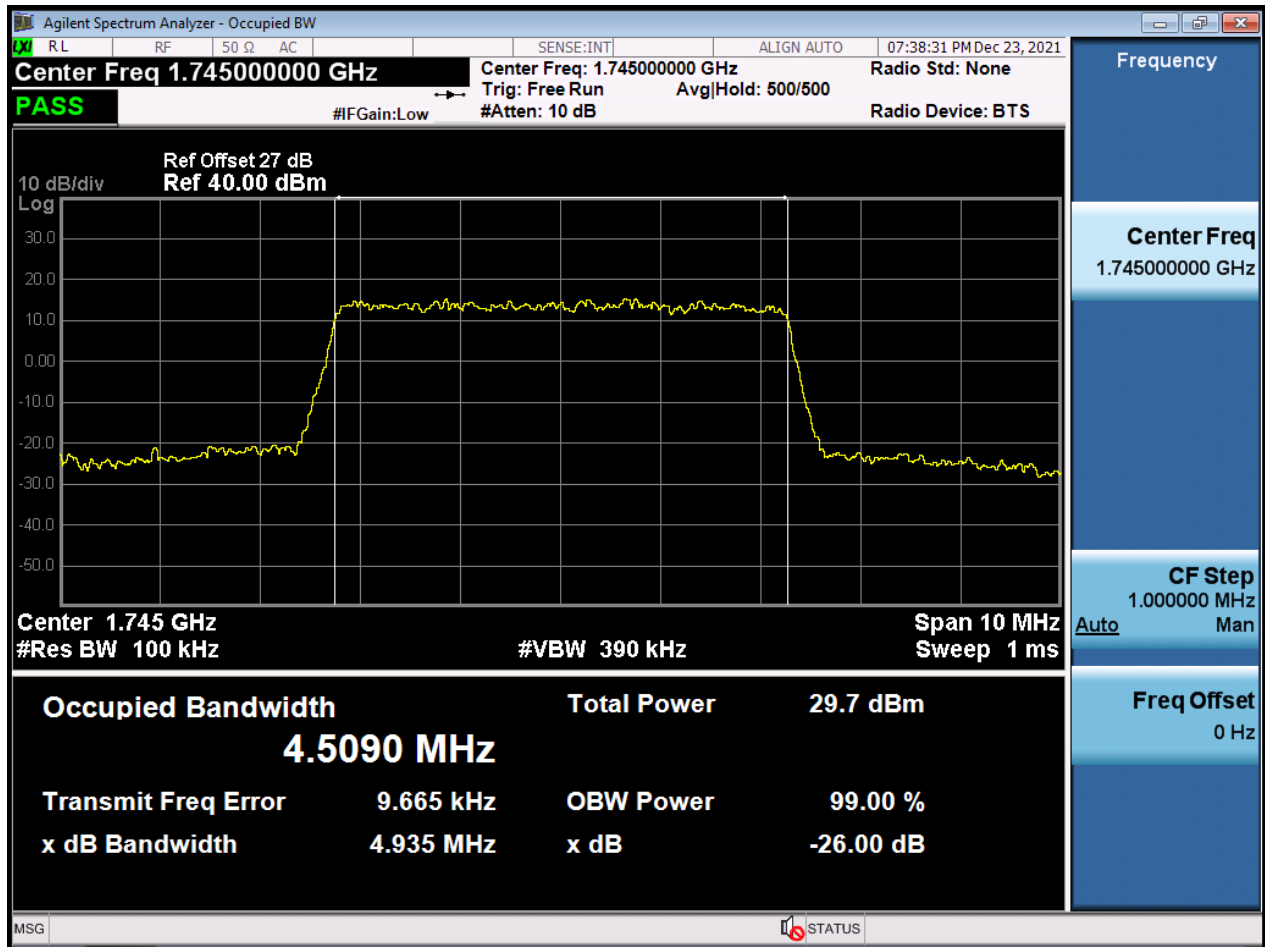


BW5 M_OBW_Middle Channel_64QAM_FullIRB

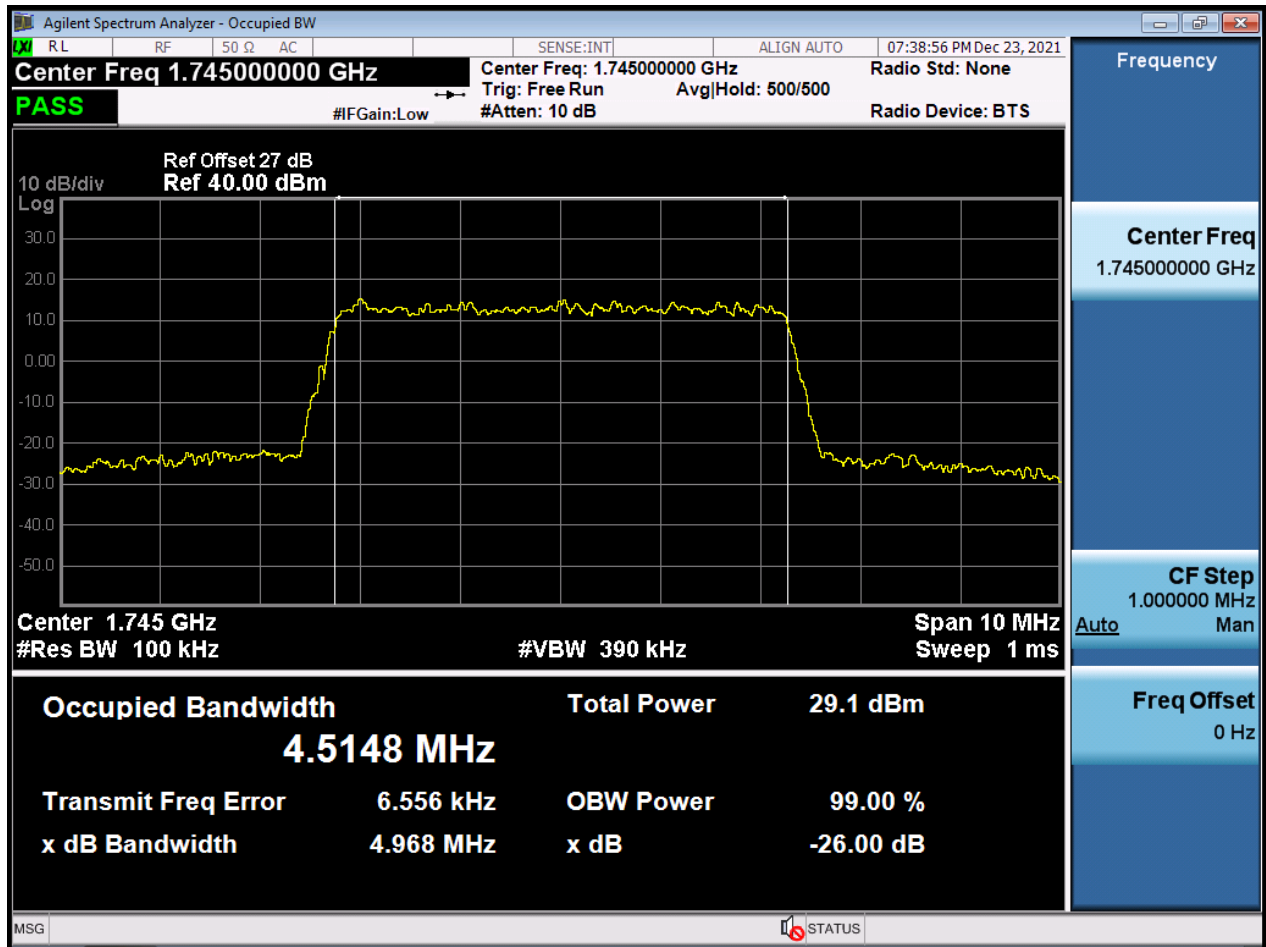


BW10 M_OBW_Middle Channel_QPSK_FullIRB

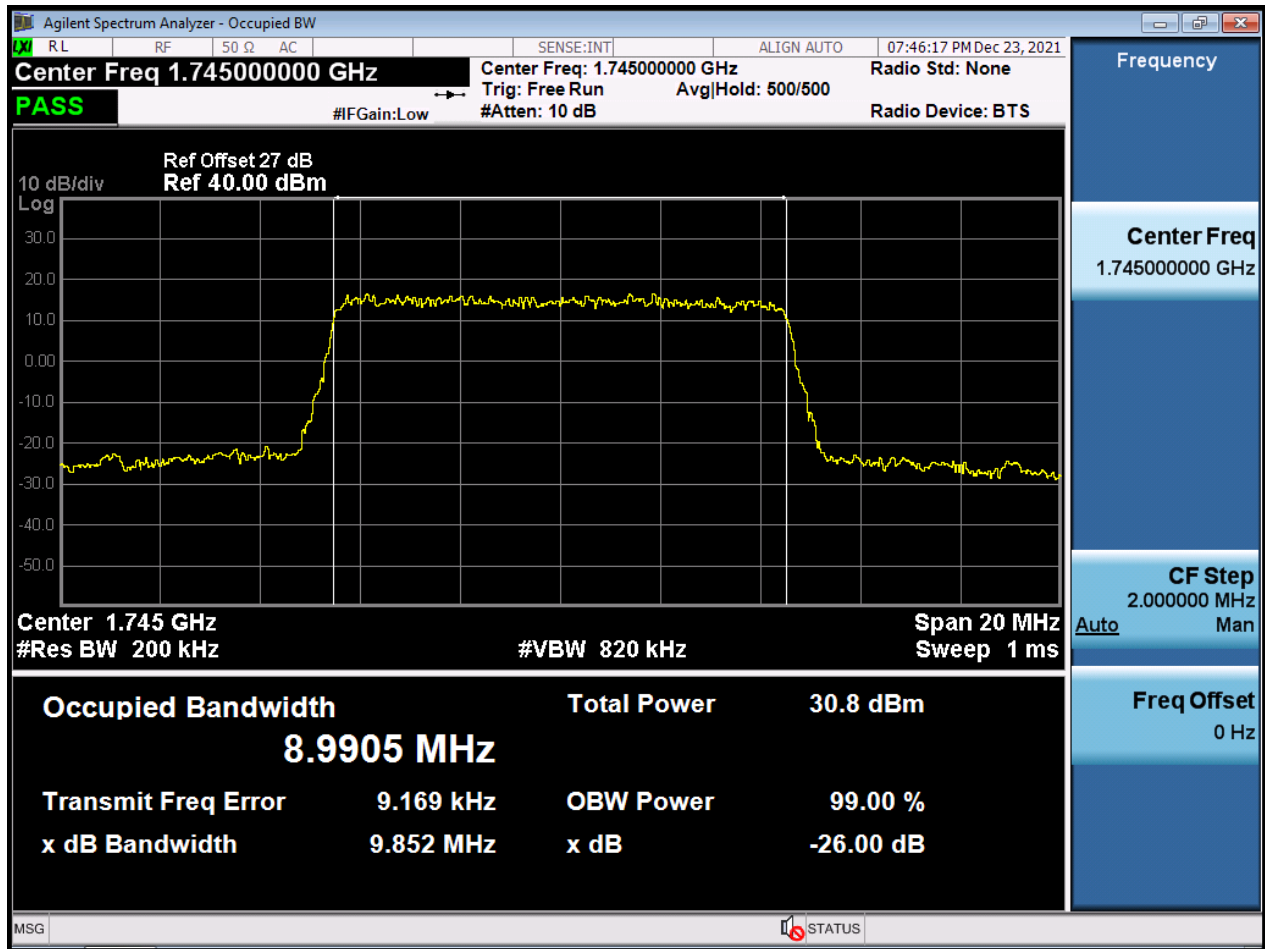


BW10 M_OBW_Middle Channel_16QAM_FullIRB

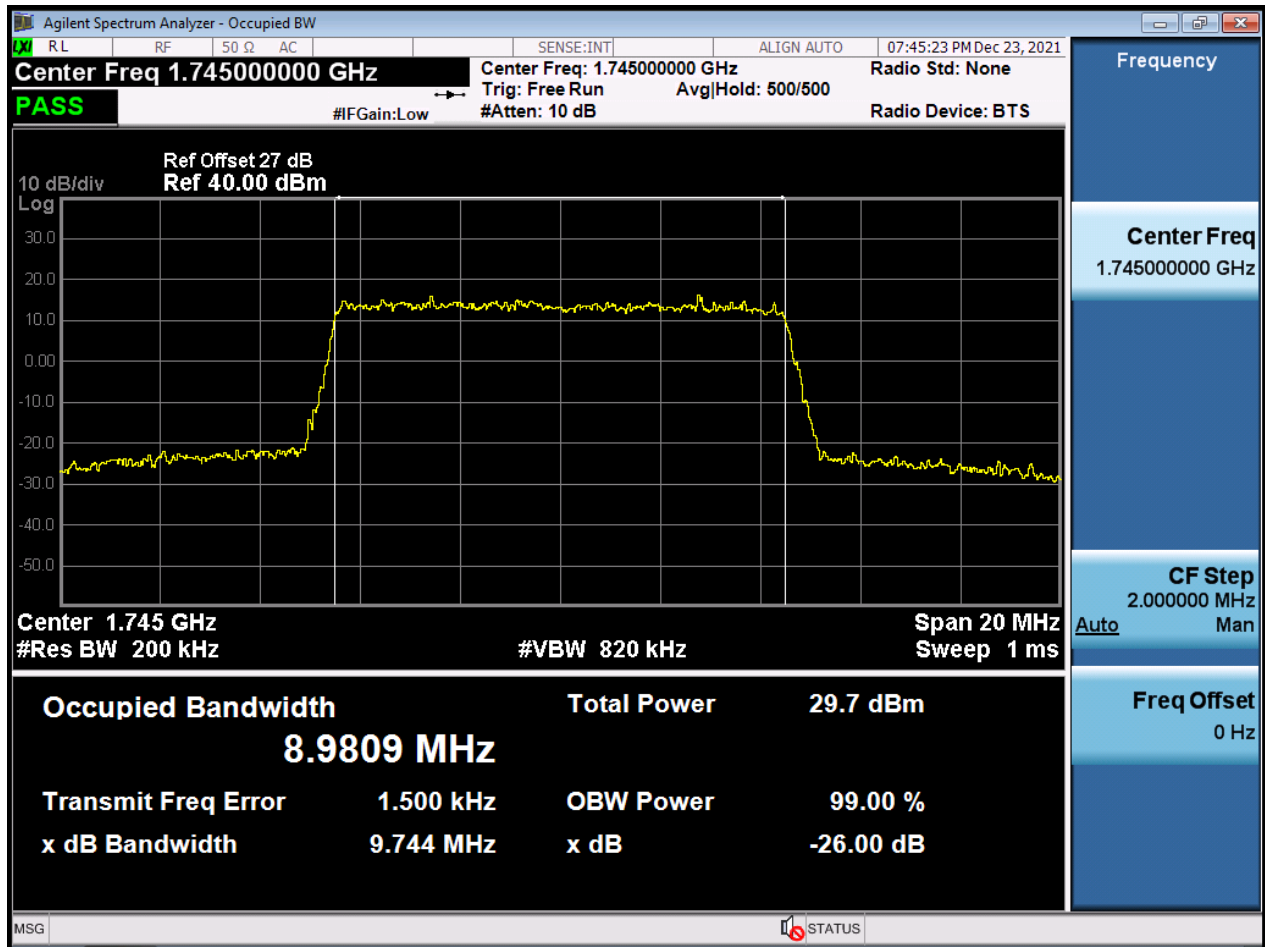


BW10 M_OBW_Middle Channel_64QAM_FullIRB

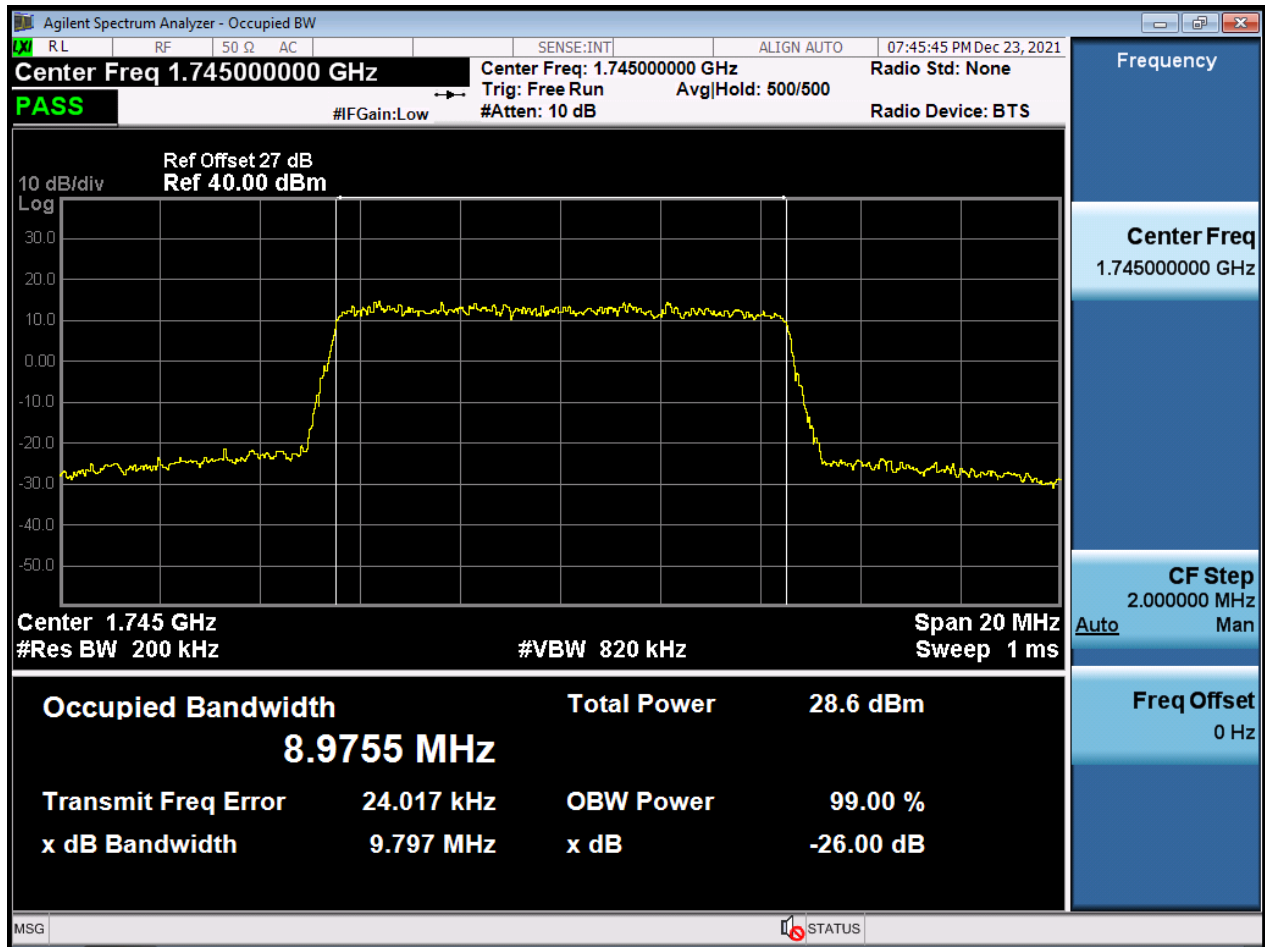


BW15 M_OBW_Middle Channel_QPSK_FullIRB

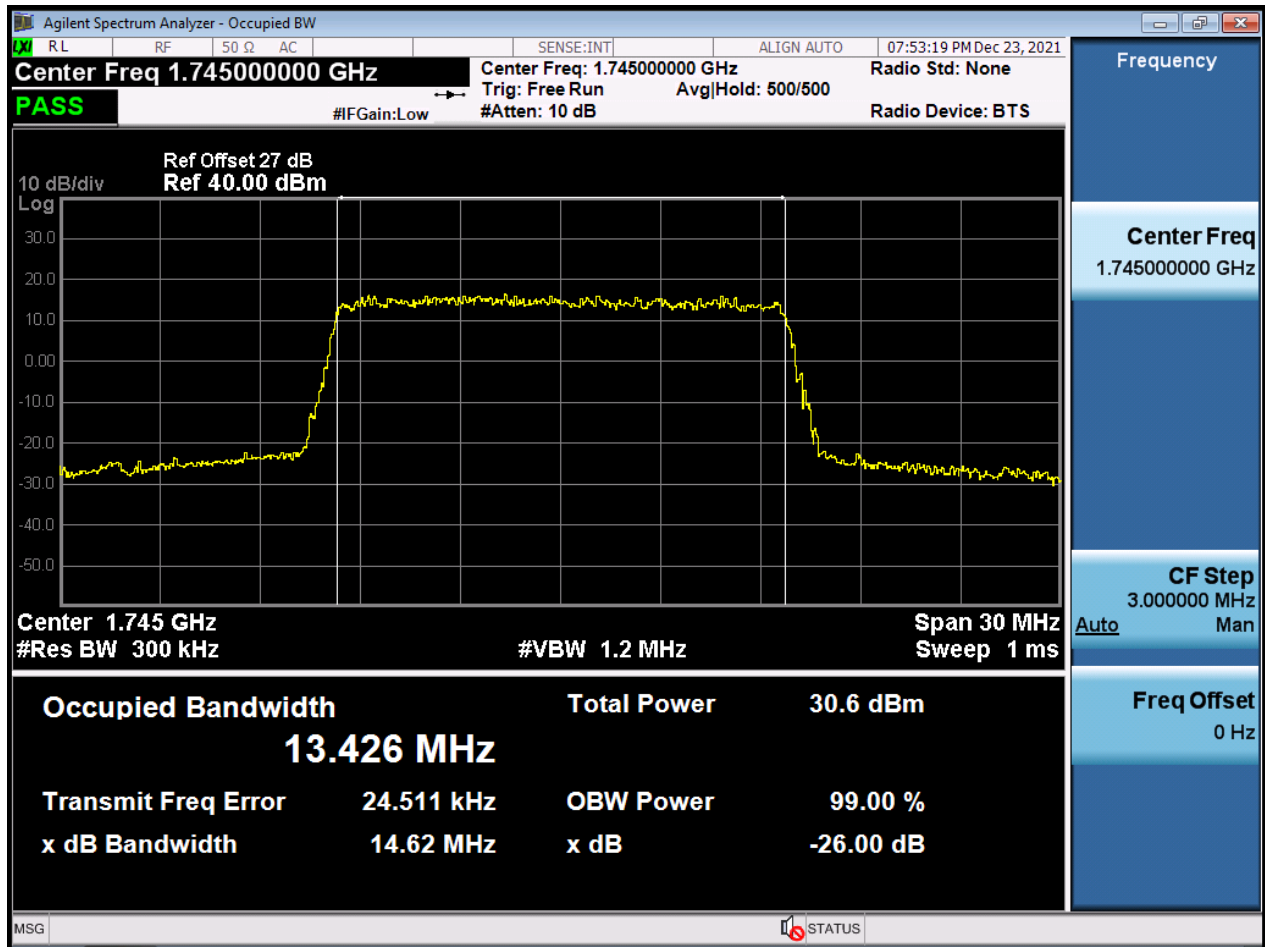


BW15 M_OBW_Middle Channel_16QAM_FullIRB

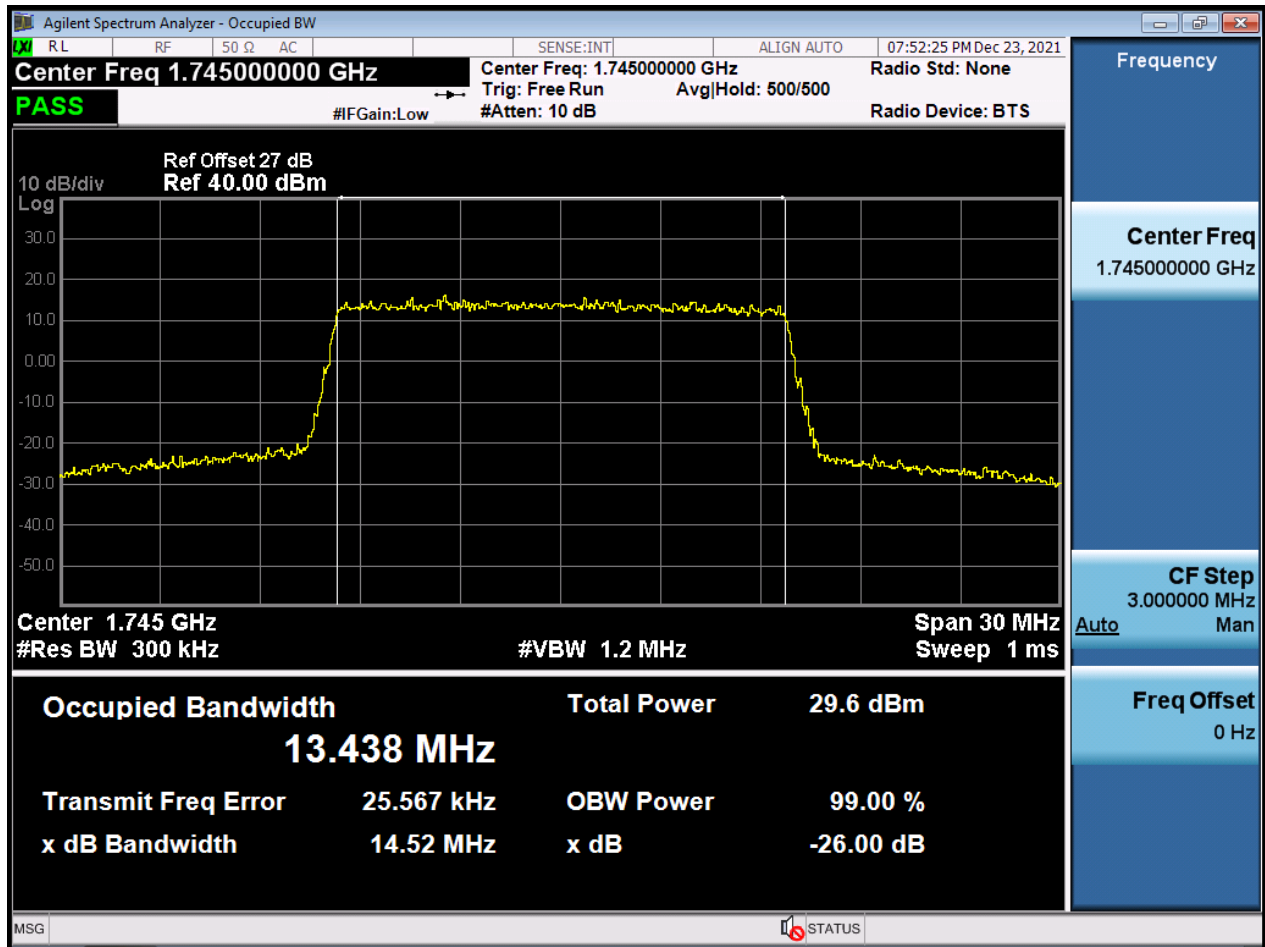


BW15 M_OBW_Middle Channel_64QAM_FullIRB

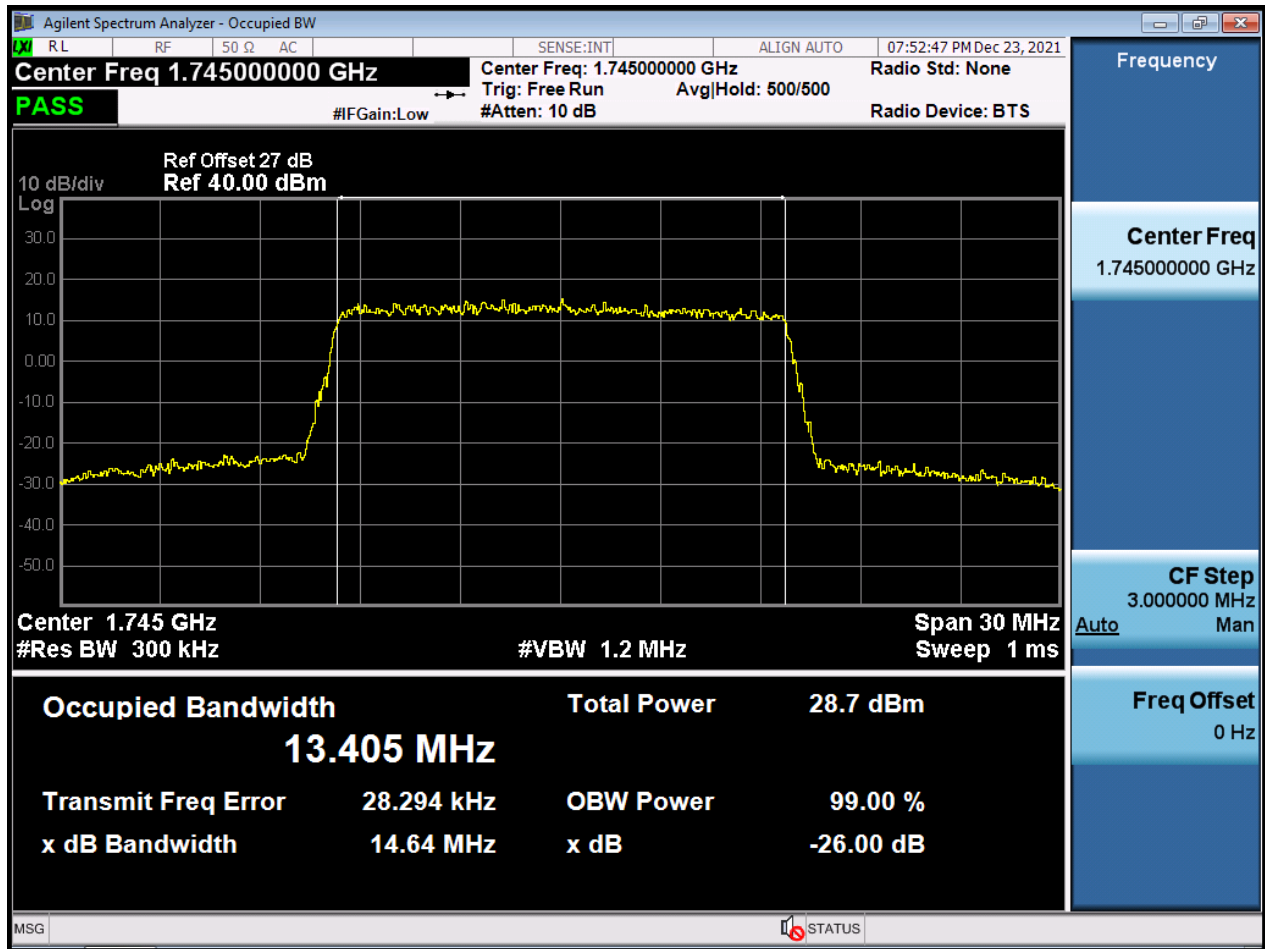


BW20 M_OBW_Middle Channel_QPSK_FullIRB

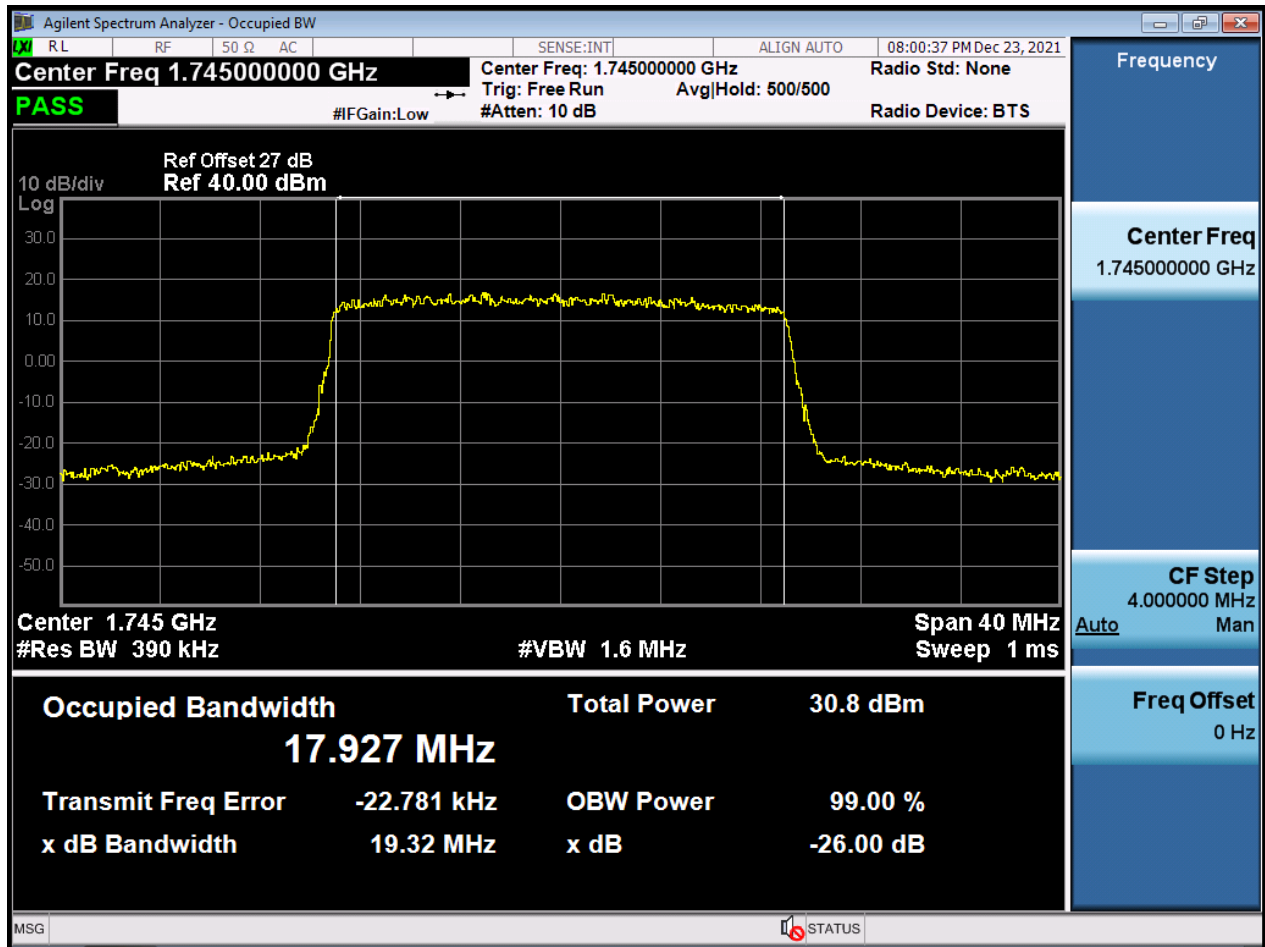


BW20 M_OBW_Middle Channel_16QAM_FullIRB

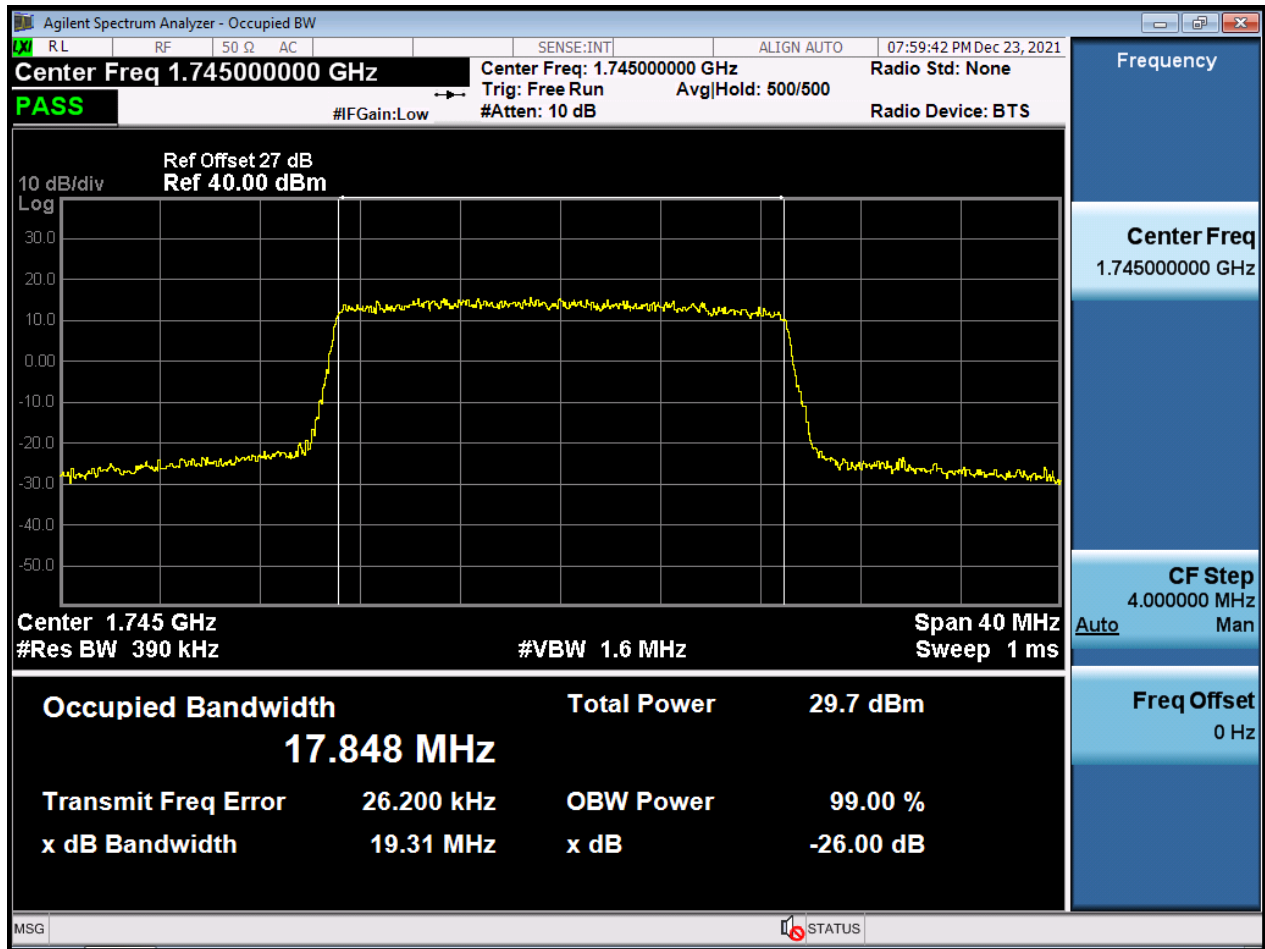


BW20 M_OBW_Middle Channel_64QAM_FullIRB

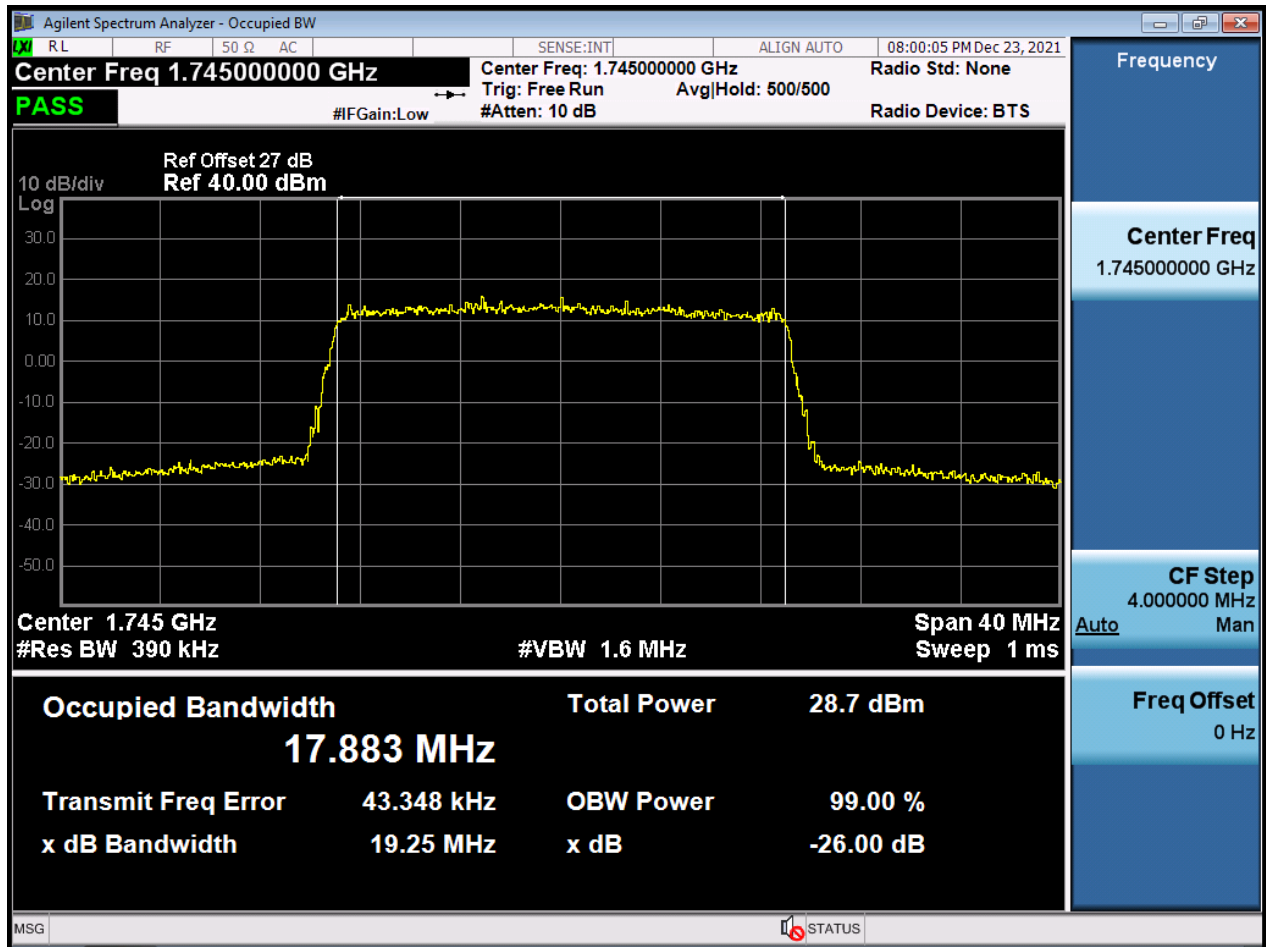


BW1.4 M_PAR_Middle Channel_QPSK_FullIRB

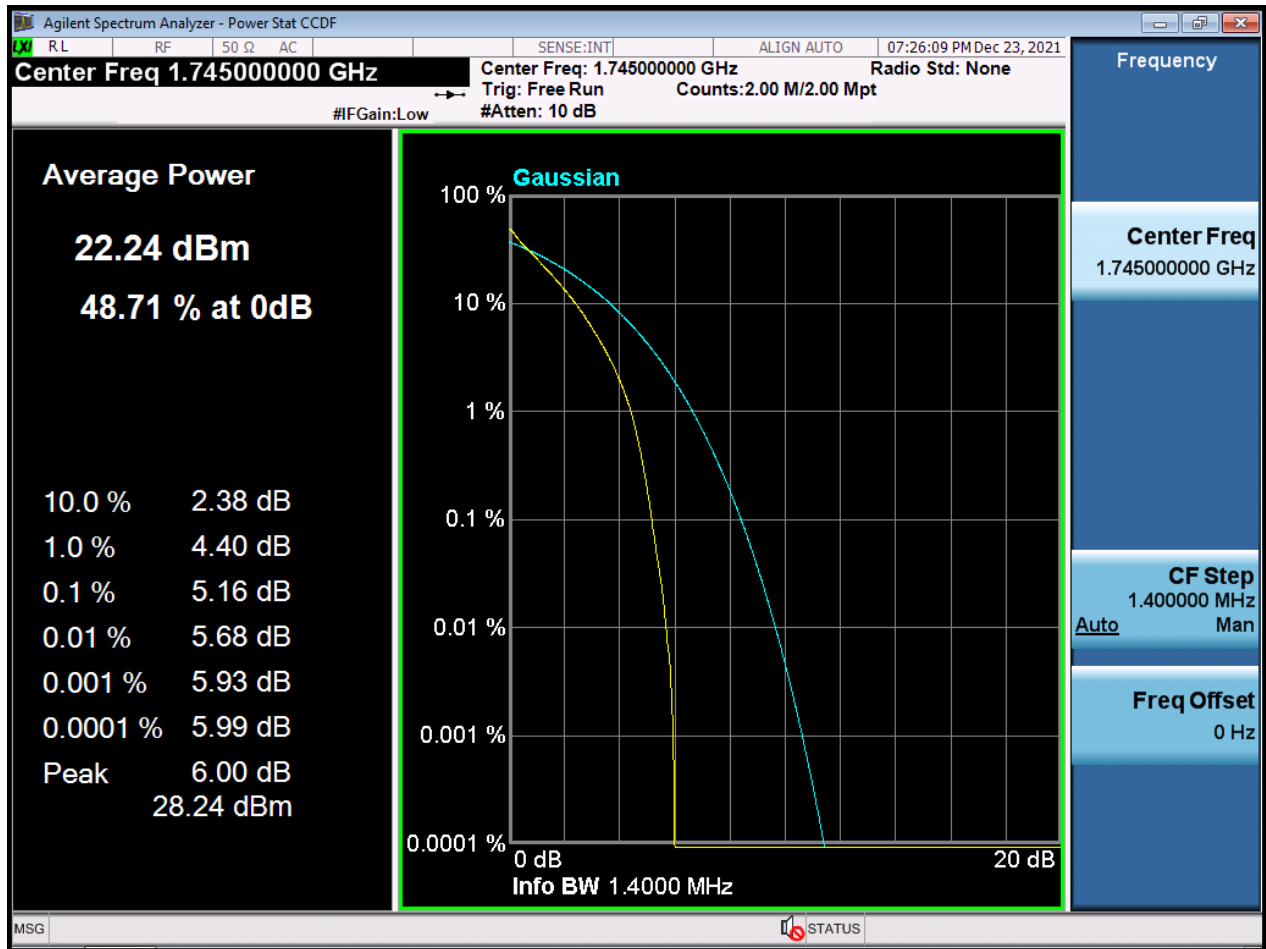


BW1.4 M_PAR_Middle Channel_16QAM_FullIRB

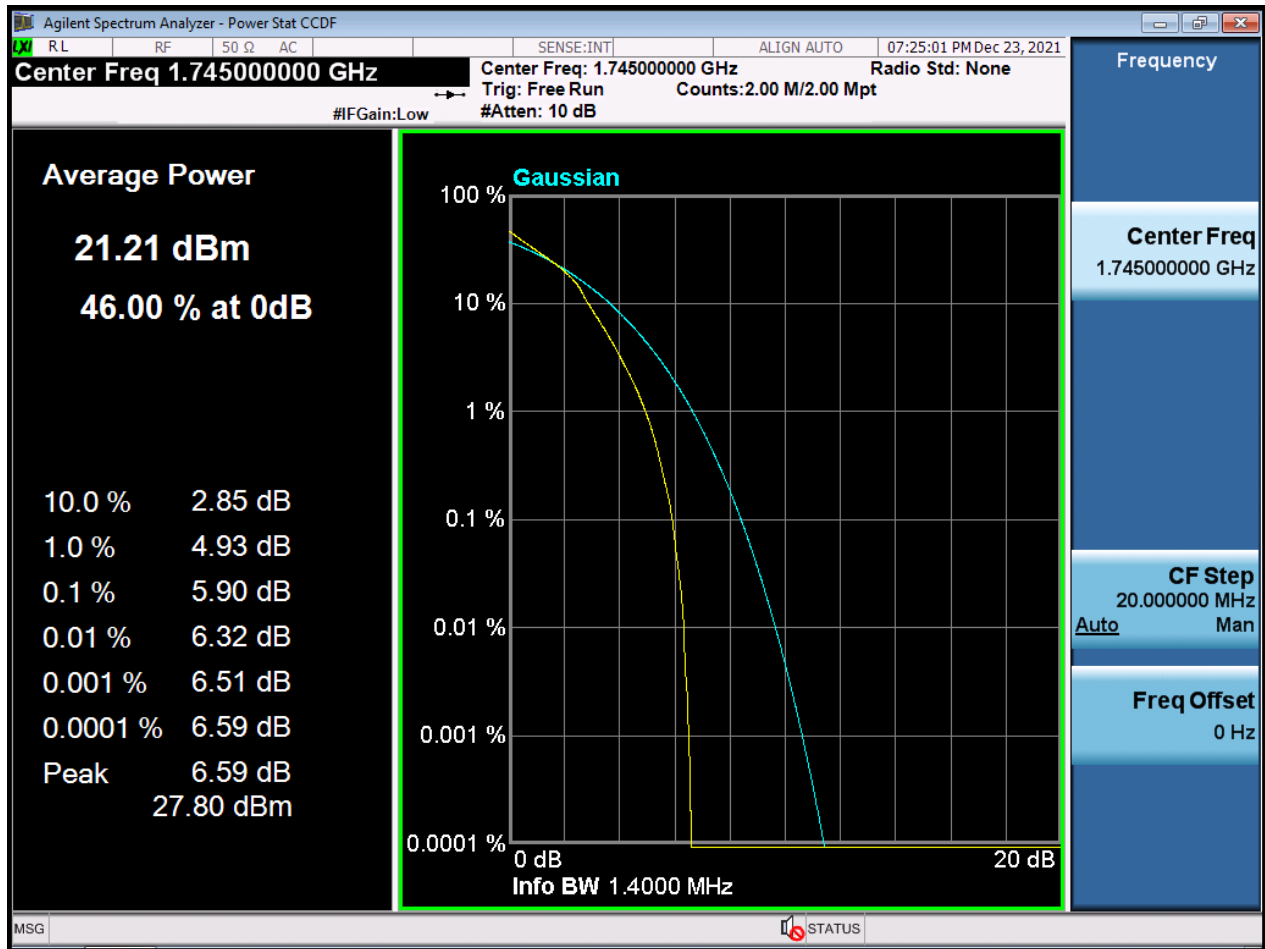


BW1.4 M_PAR_Middle Channel_64QAM_FullRB

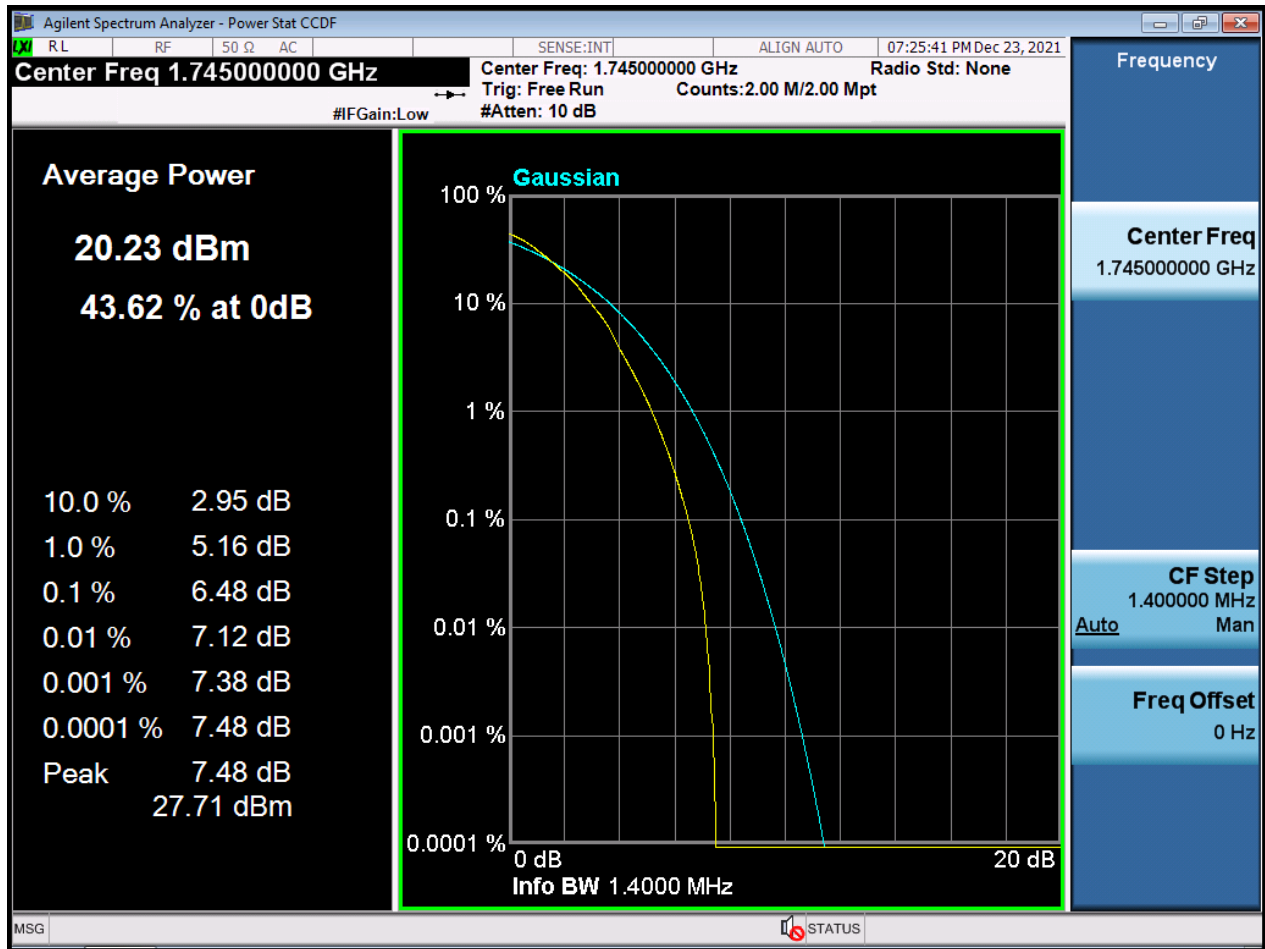


BW3 M_PAR_Middle Channel_QPSK_FullIRB

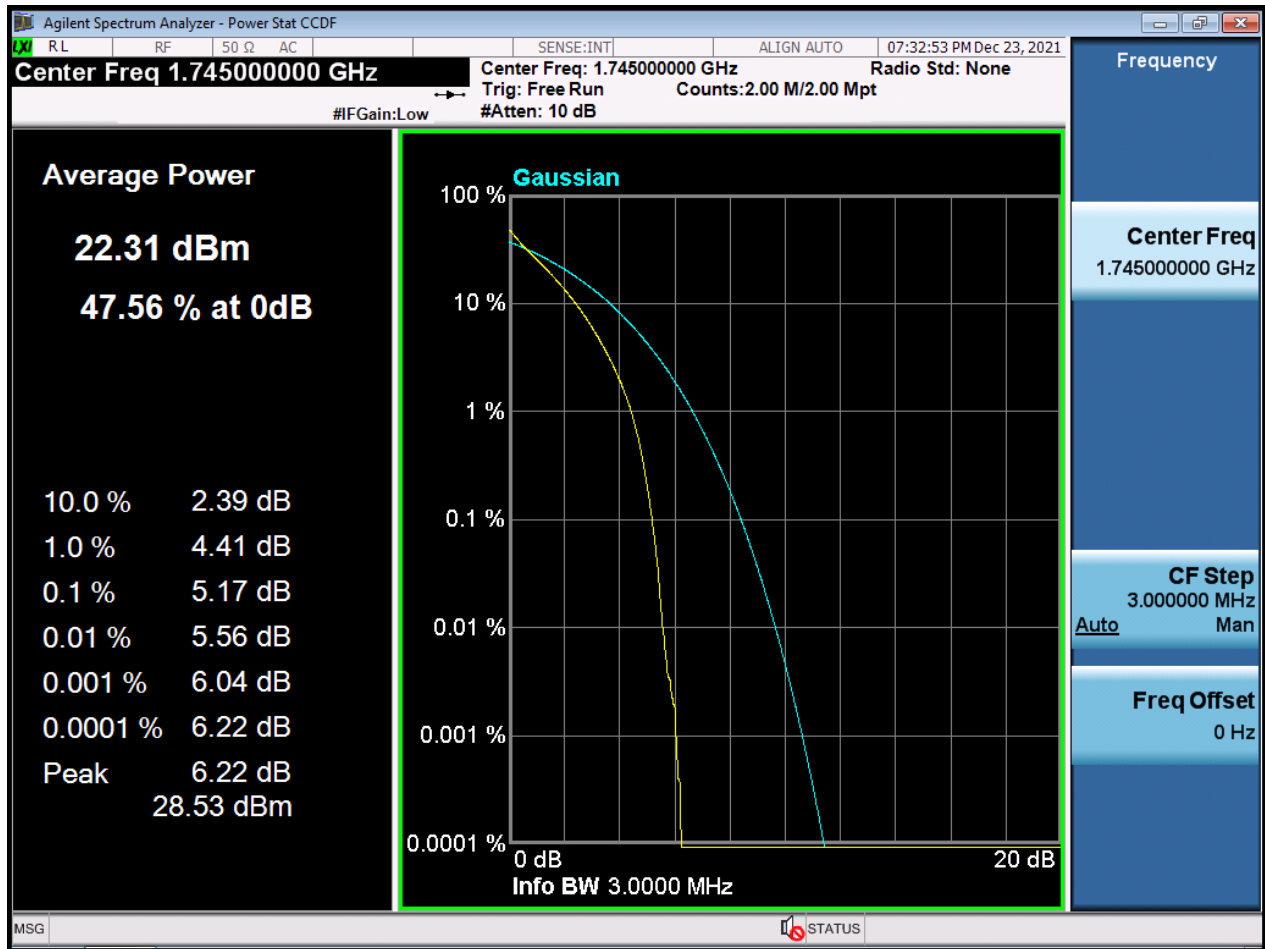


BW3 M_PAR_Middle Channel_16QAM_FullRB

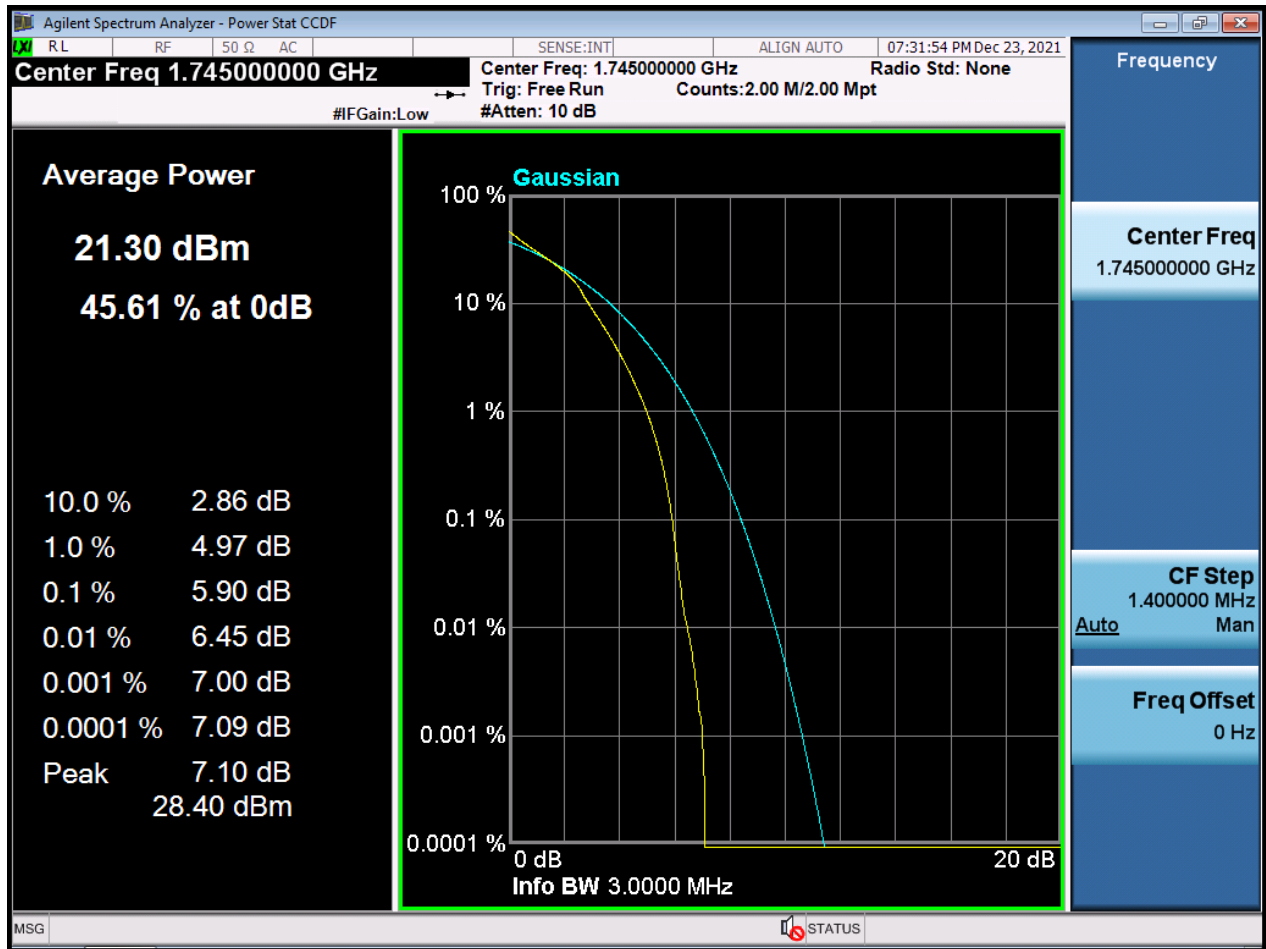


BW3 M_PAR_Middle Channel_64QAM_FuIRB

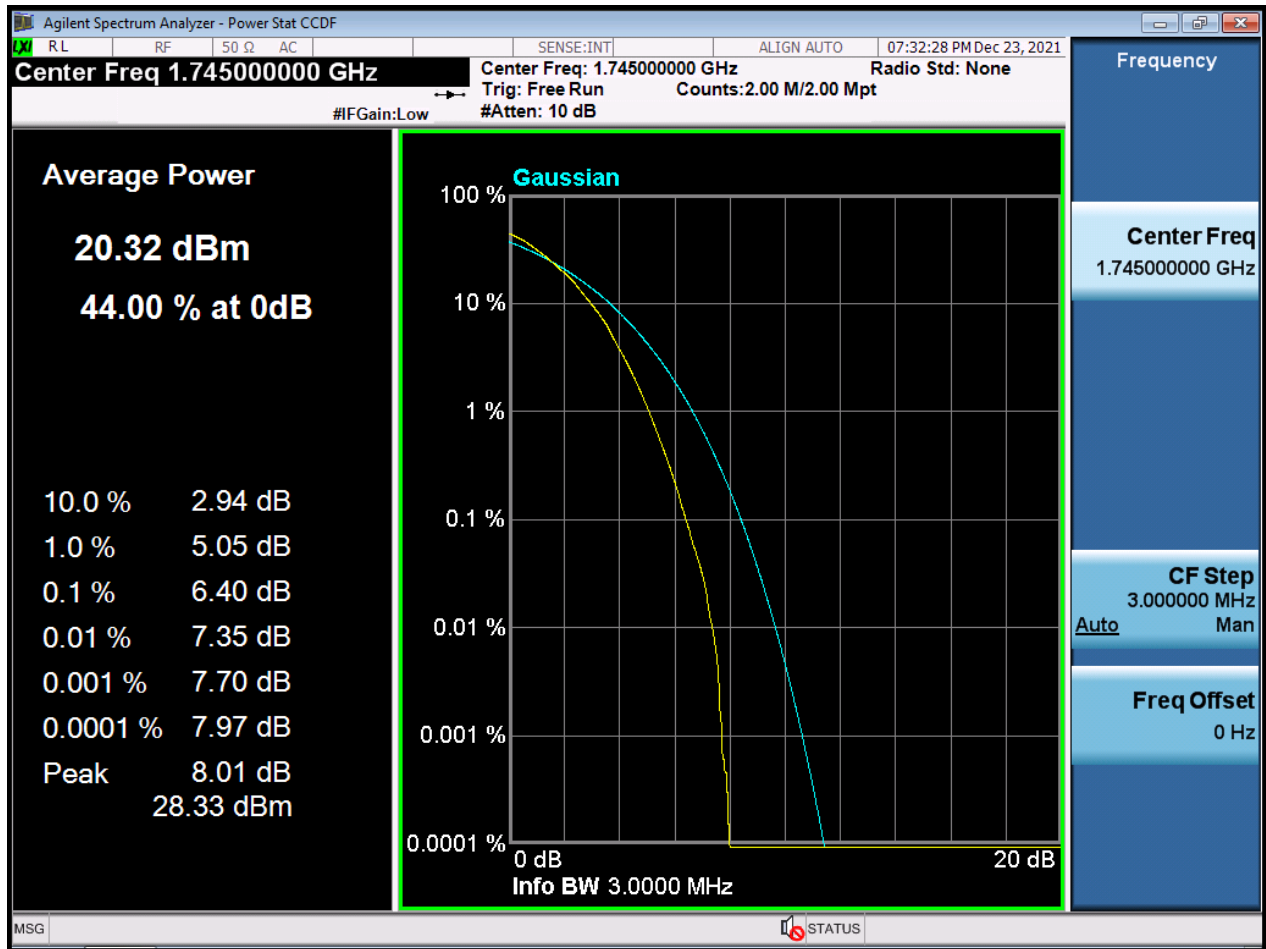


BW5 M_PAR_Middle Channel_QPSK_FullIRB

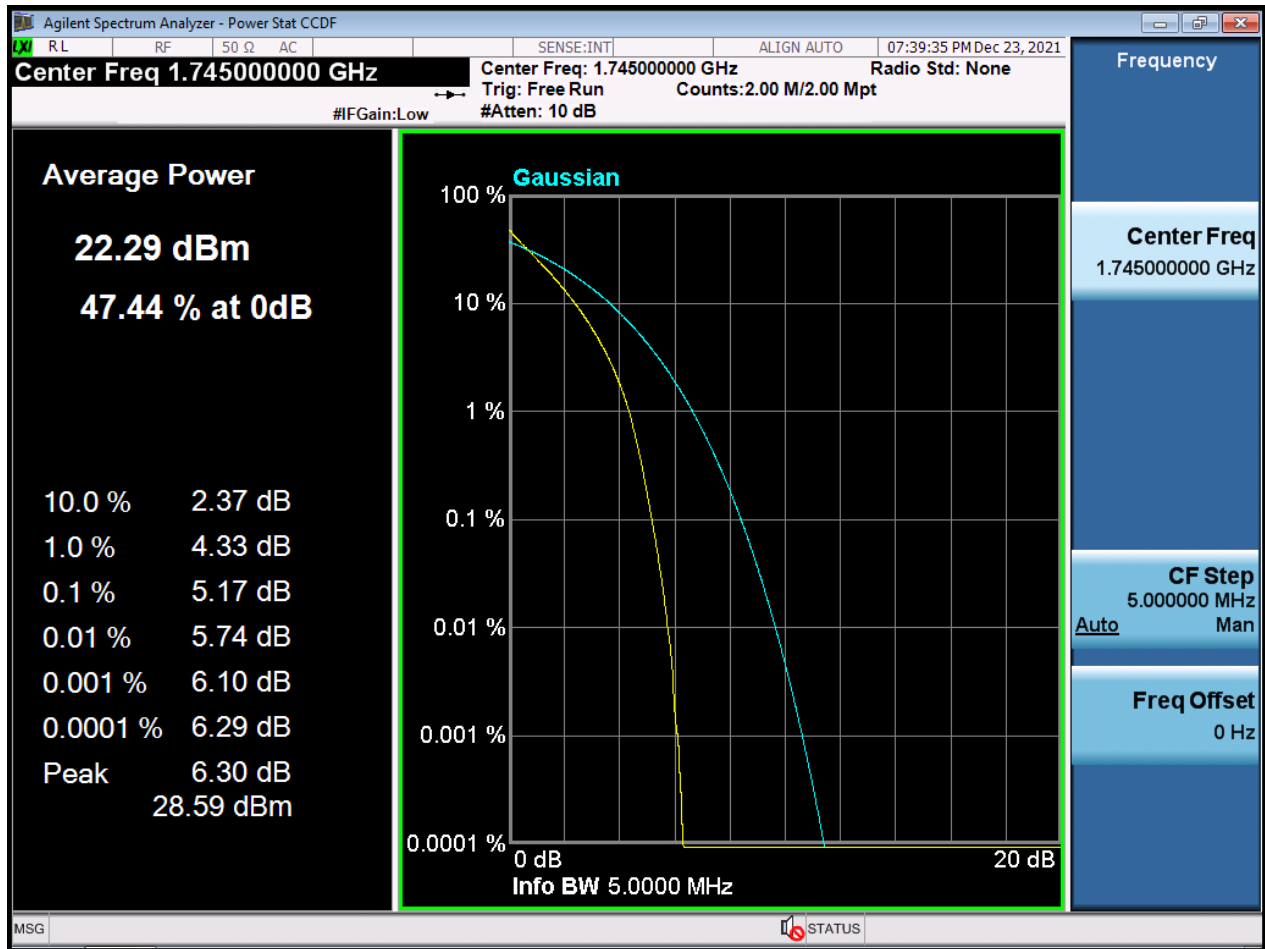


BW5 M_PAR_Middle Channel_16QAM_FullRB

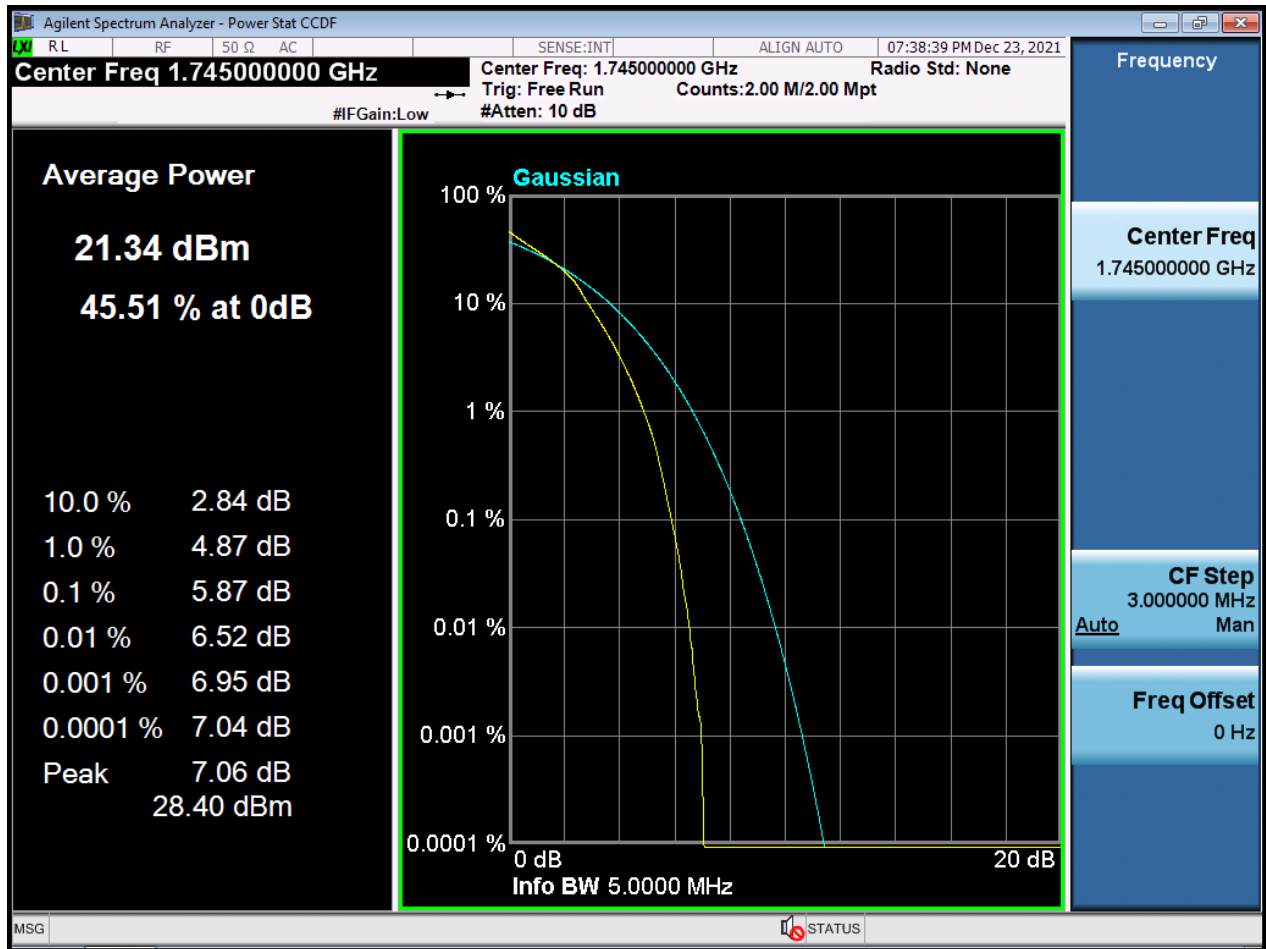


BW5 M_PAR_Middle Channel_64QAM_FuIRB

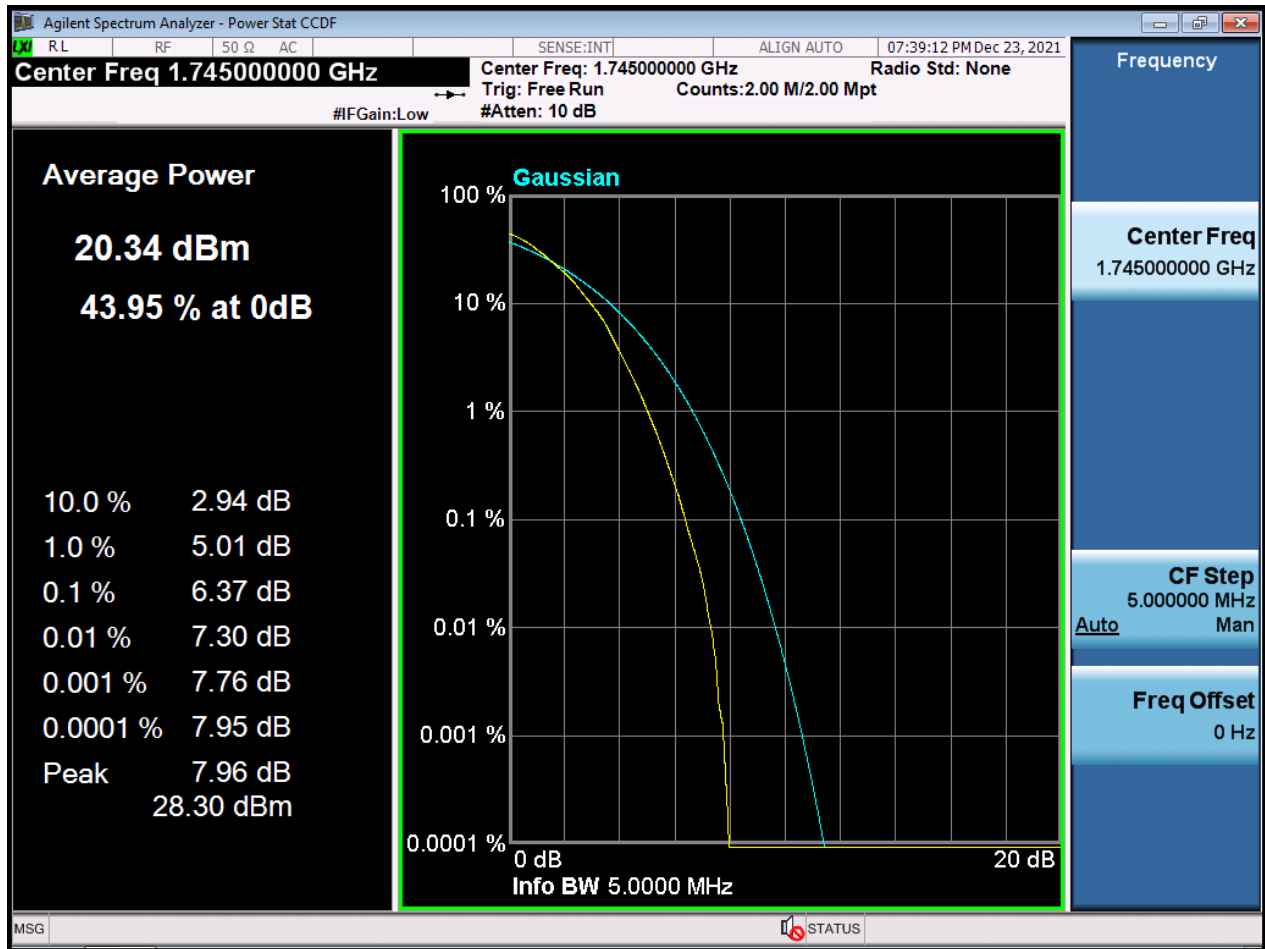


BW10 M_PAR_Middle Channelz_QPSK_FullRB

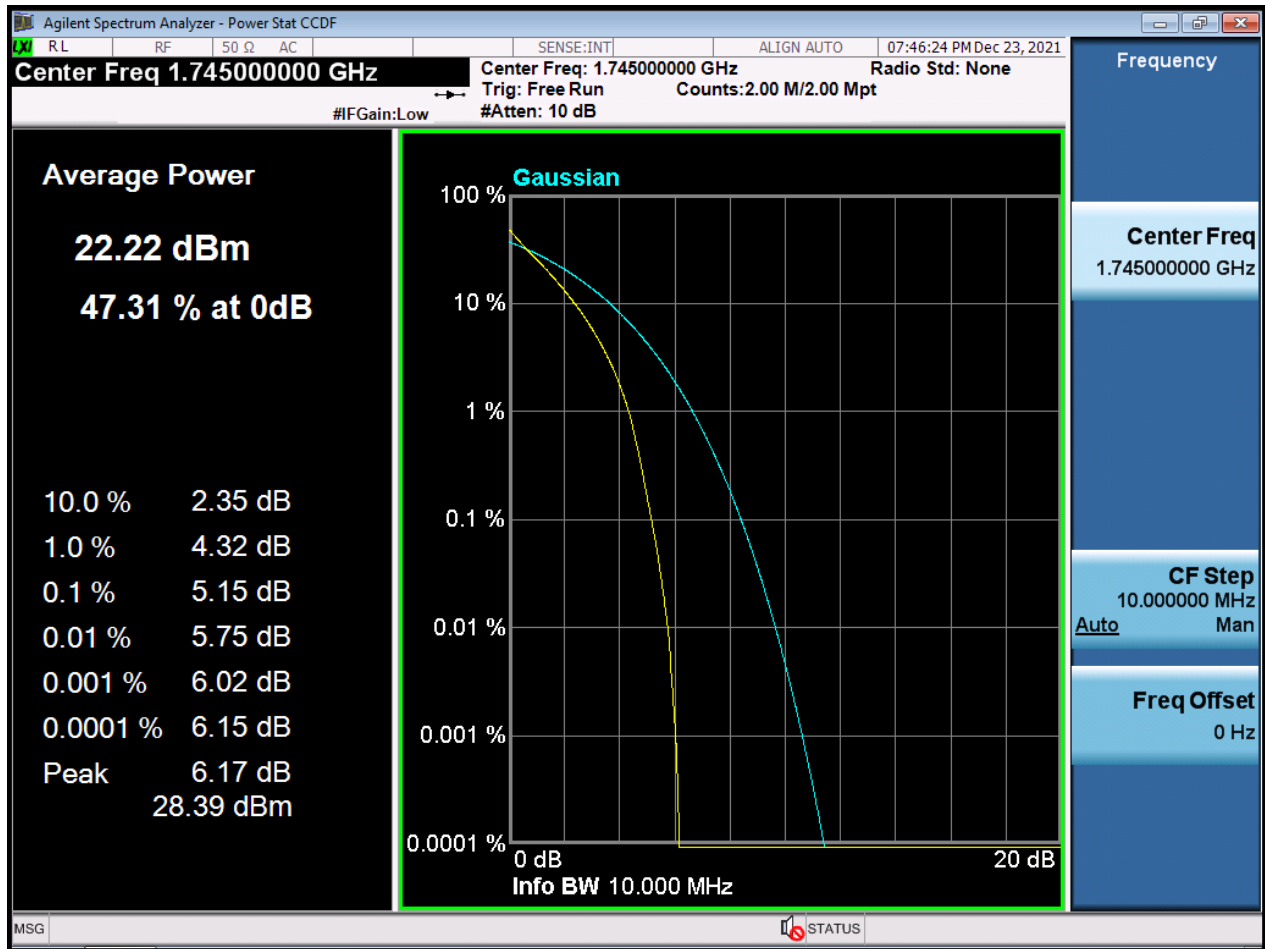


BW10 M_PAR_Middle Channel_16QAM_FullRB

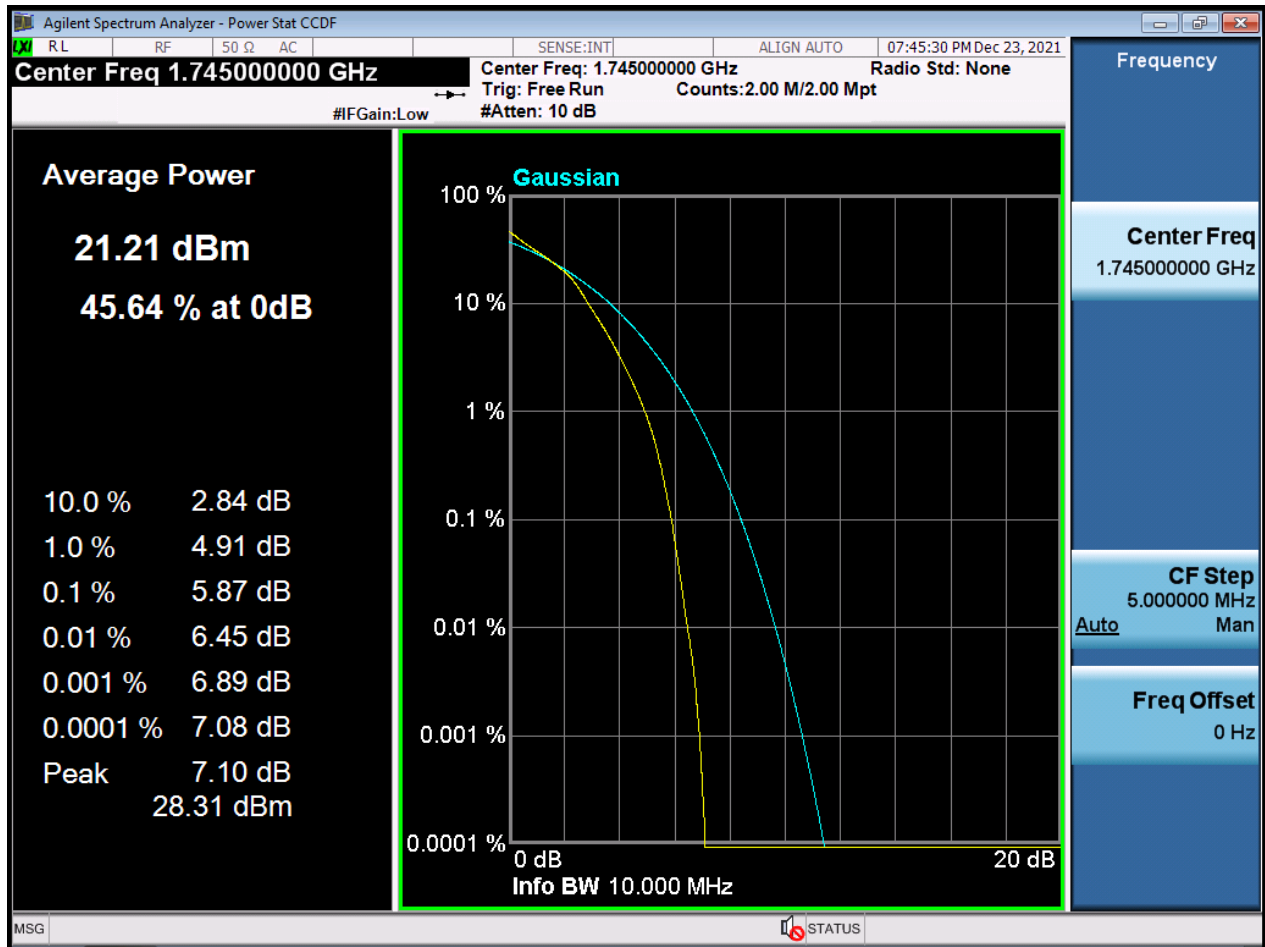


BW10 M_PAR_Middle Channel_64QAM_FullRB

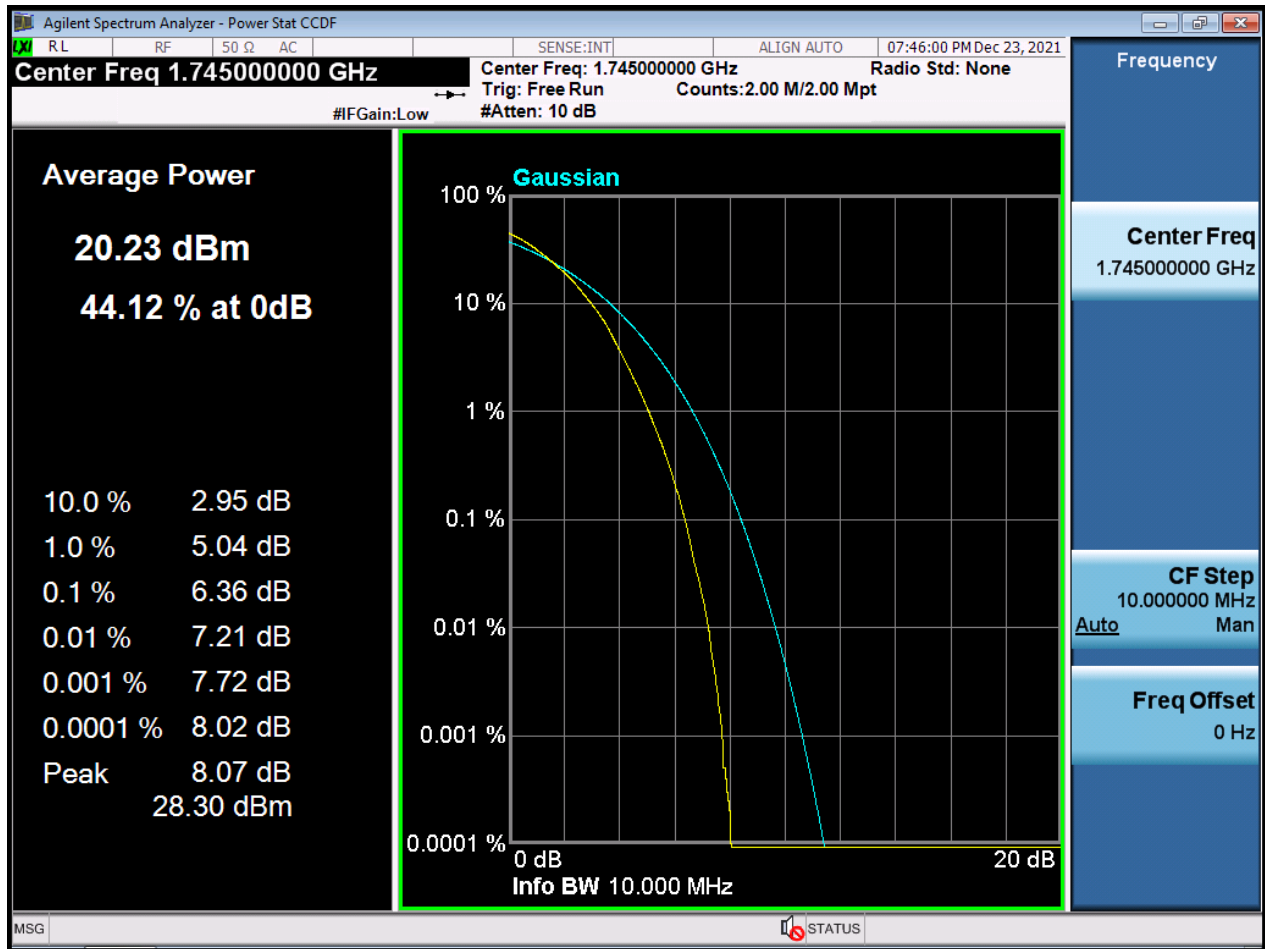


BW15 M_PAR_Middle Channel_QPSK_FullRB

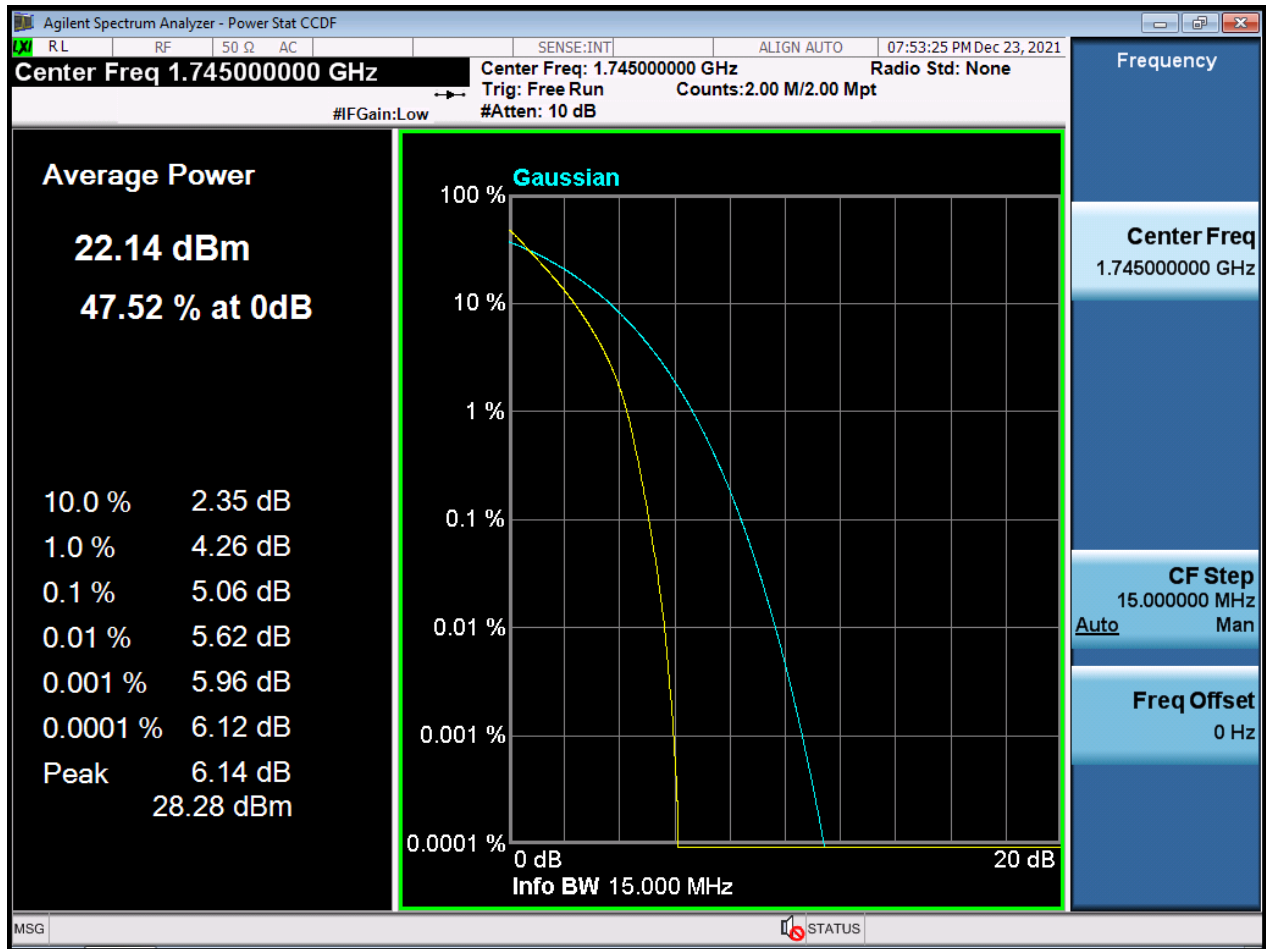


BW15 M_PAR_Middle Channel_16QAM_FullRB

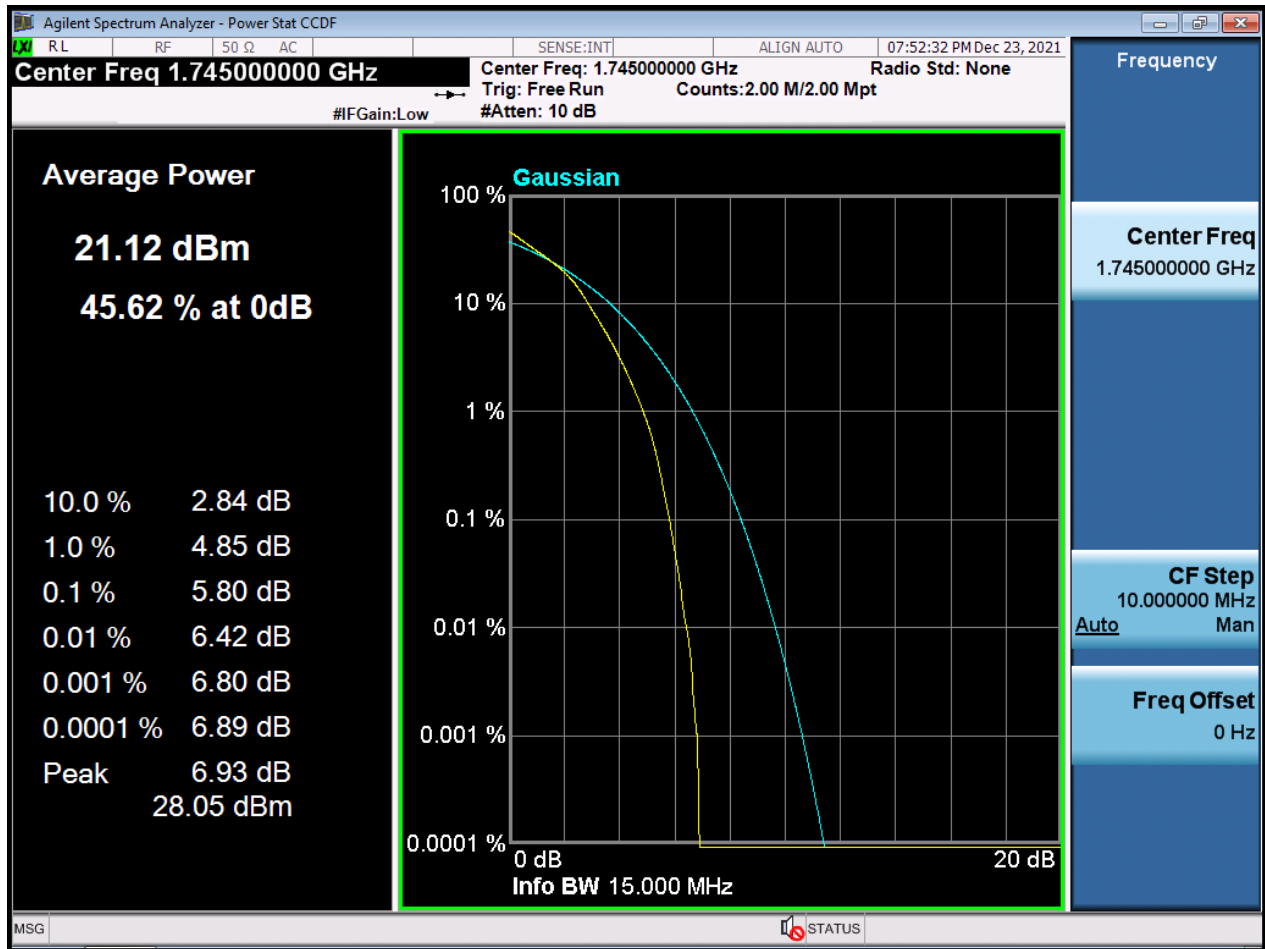


BW15 M_PAR_Middle Channel_64QAM_FullRB

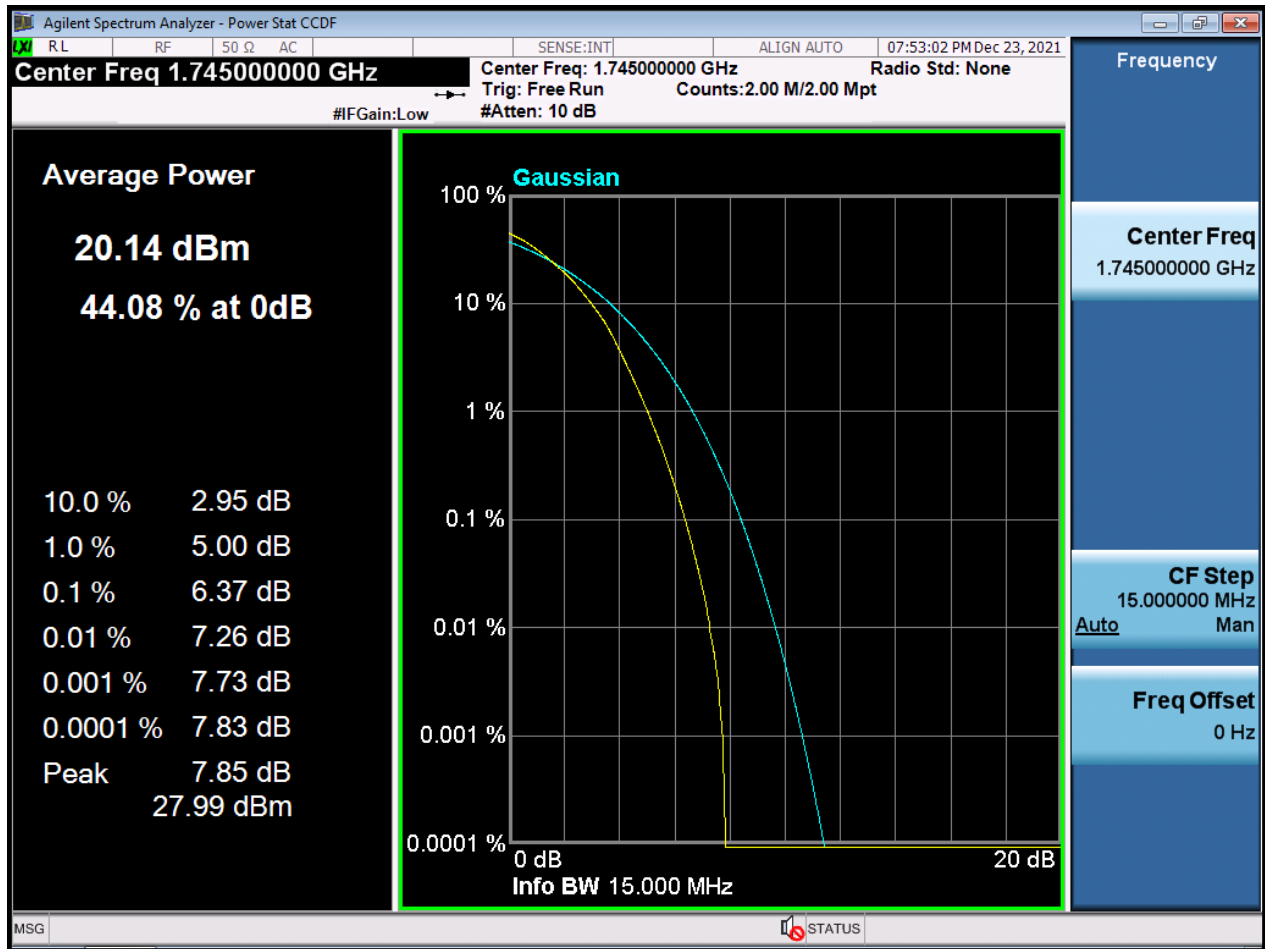


BW20 M_PAR_Middle Channel_QPSK_FullRB

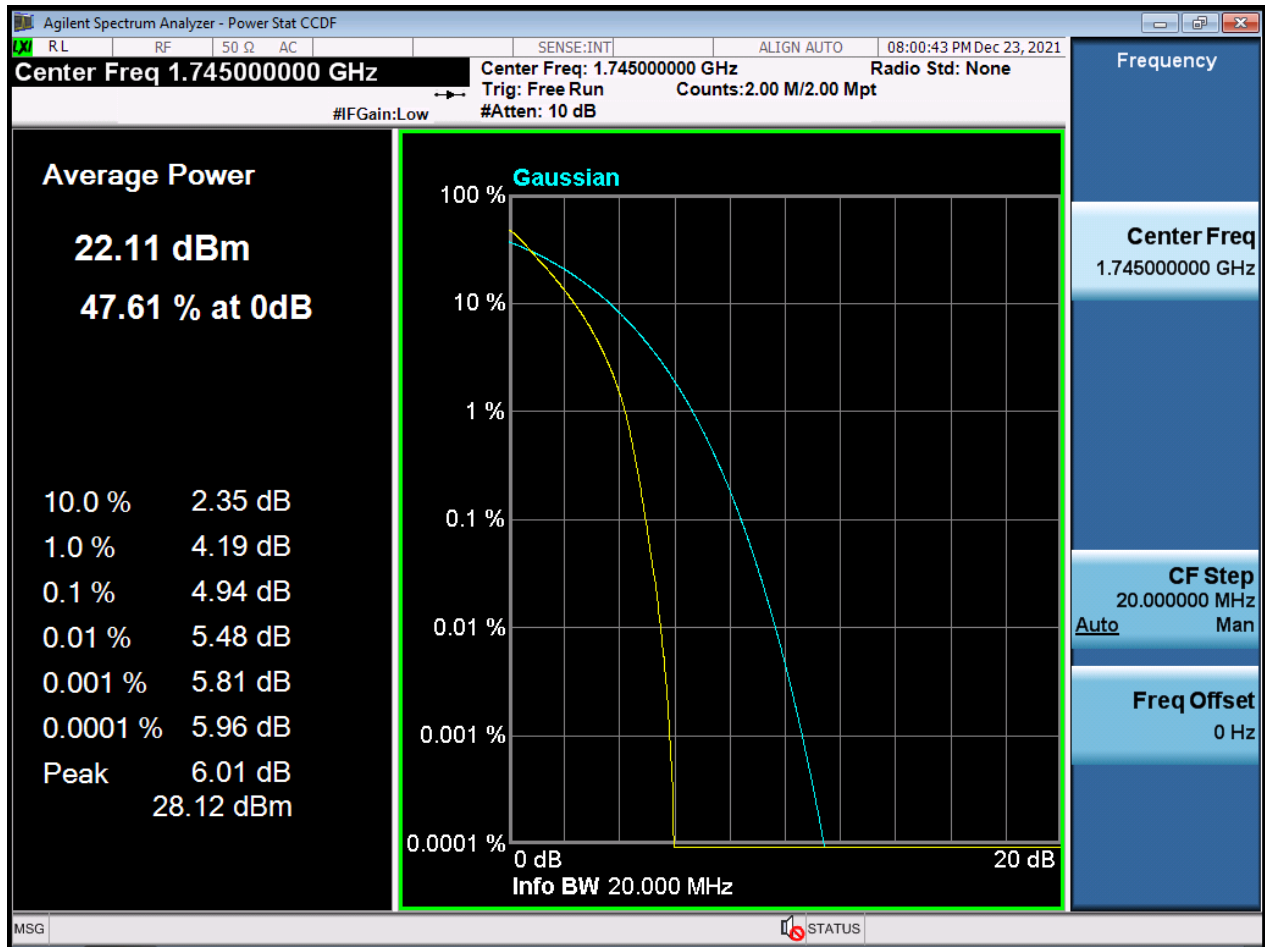


BW20 M_PAR_Middle Channel_16QAM_FullRB

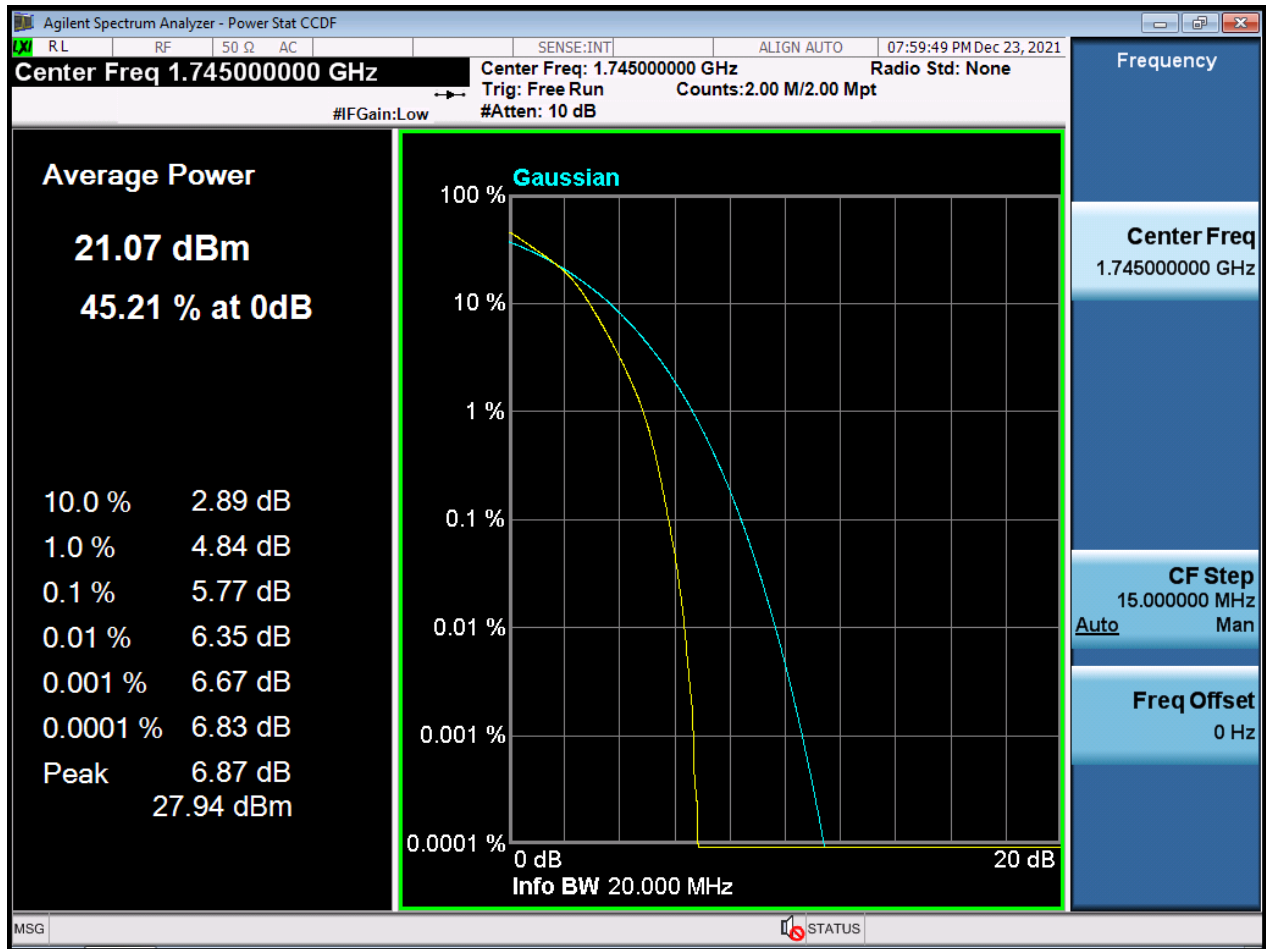


BW20 M_PAR_Middle Channel_64QAM_FullRB

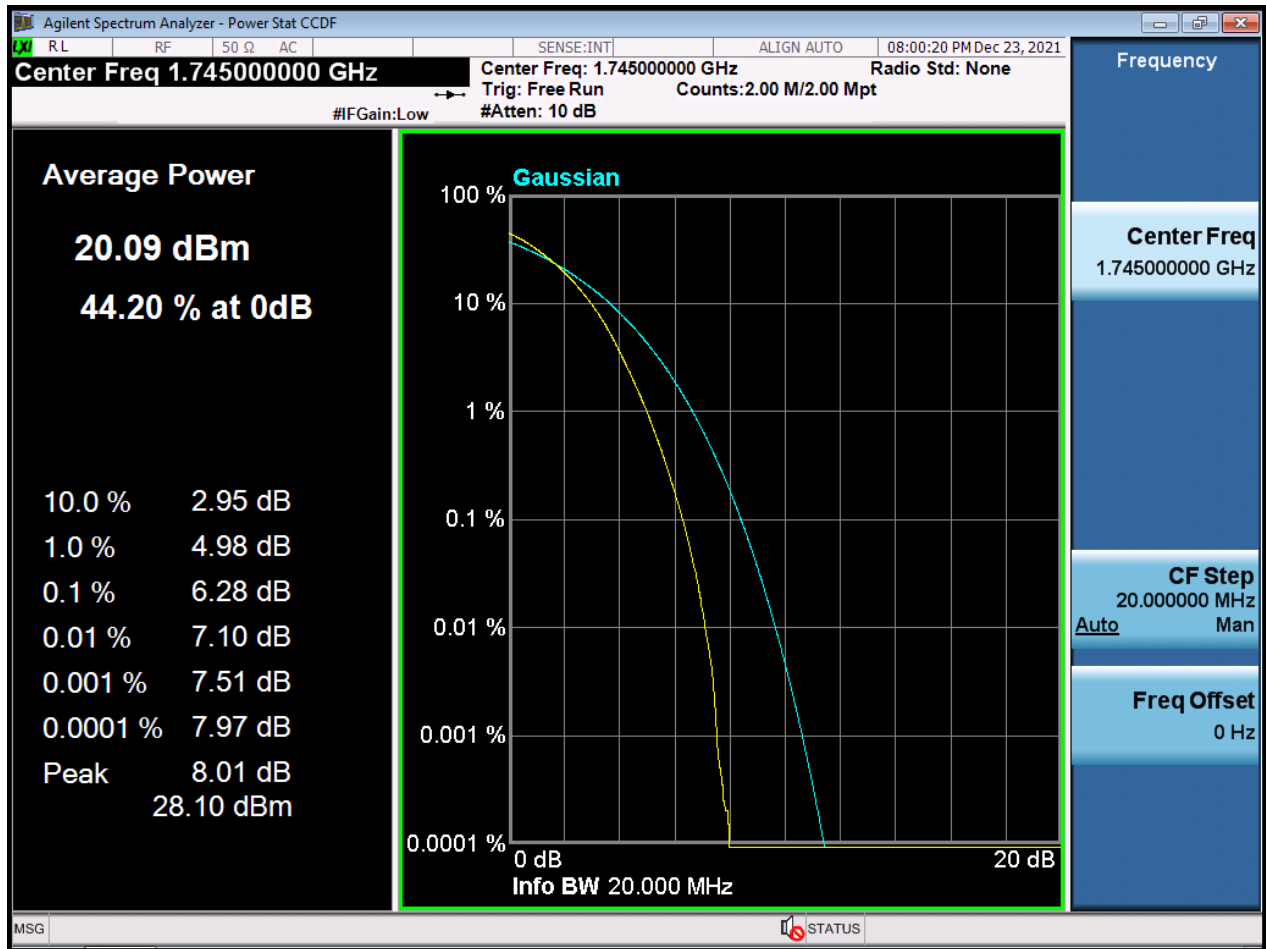


BW1.4 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

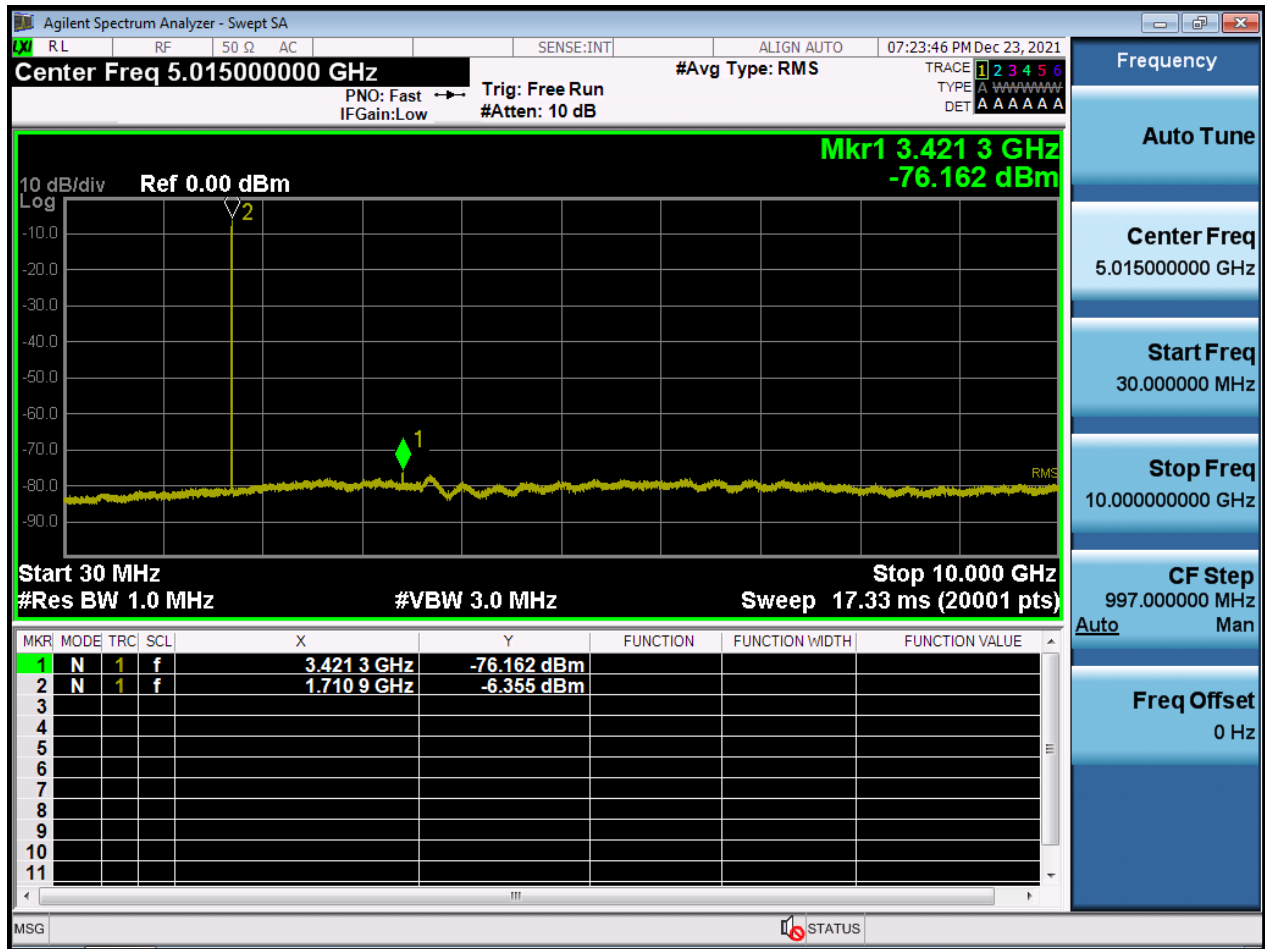


BW1.4 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

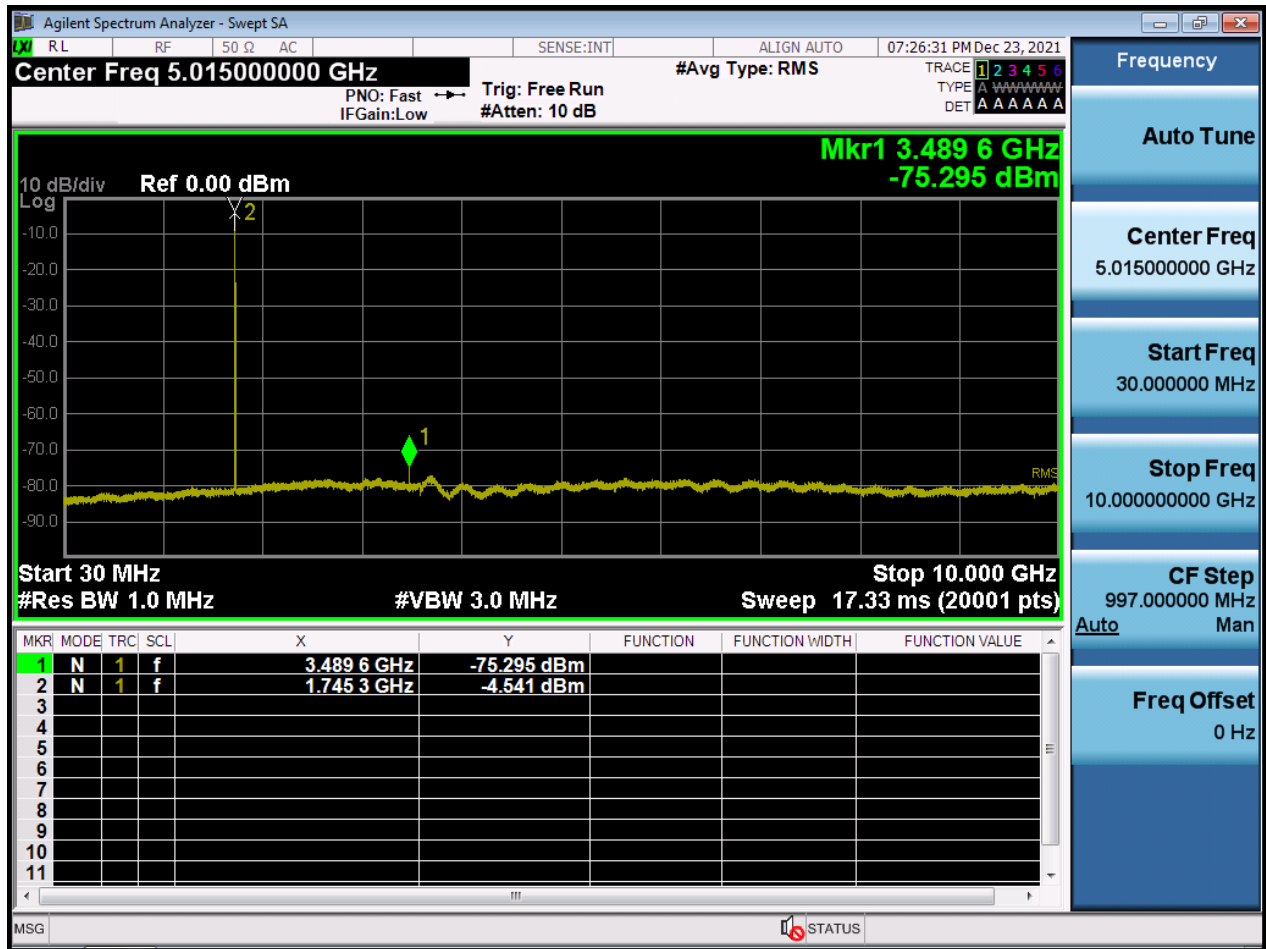


BW1.4 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

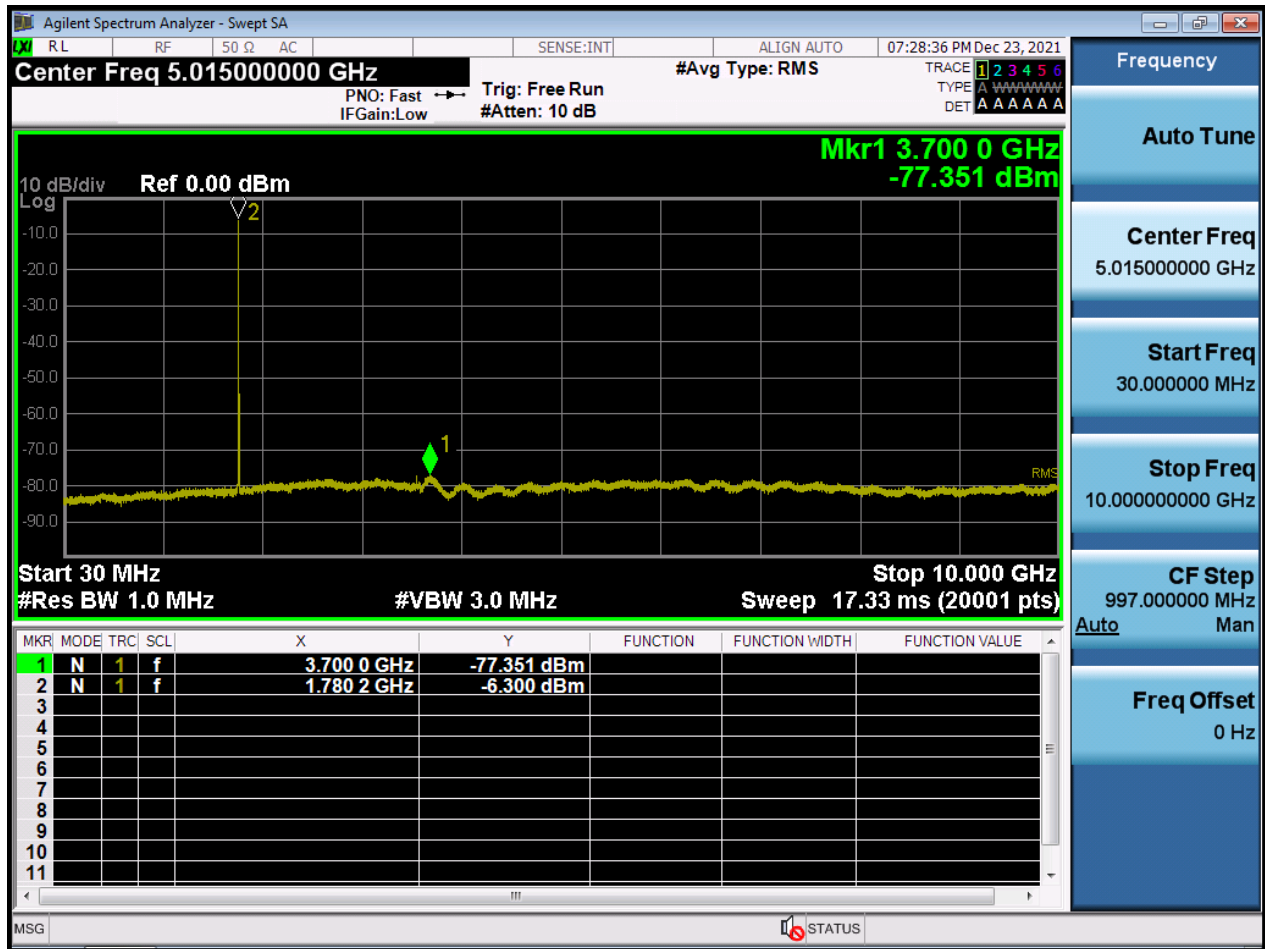


BW3 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

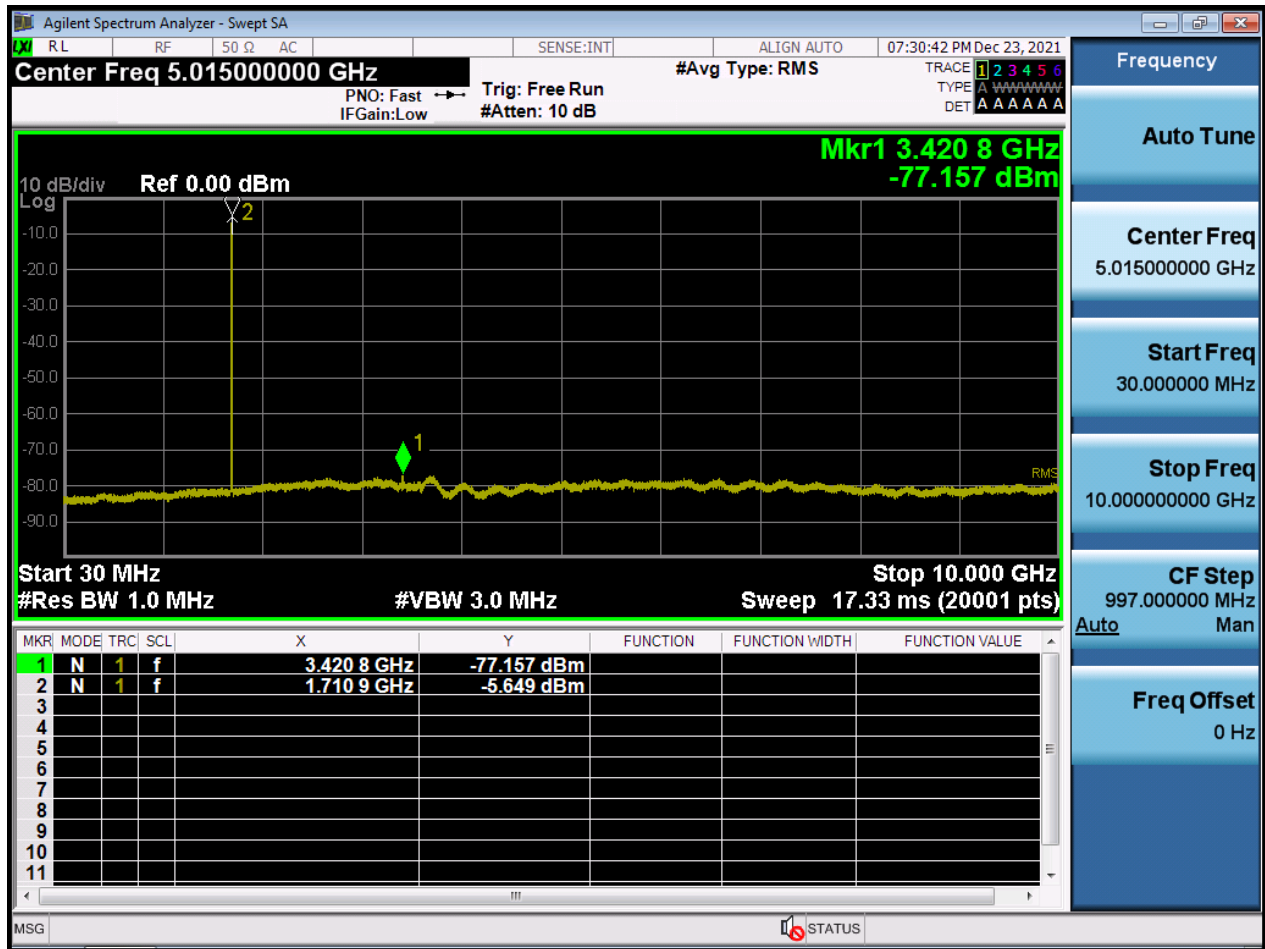


BW3 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

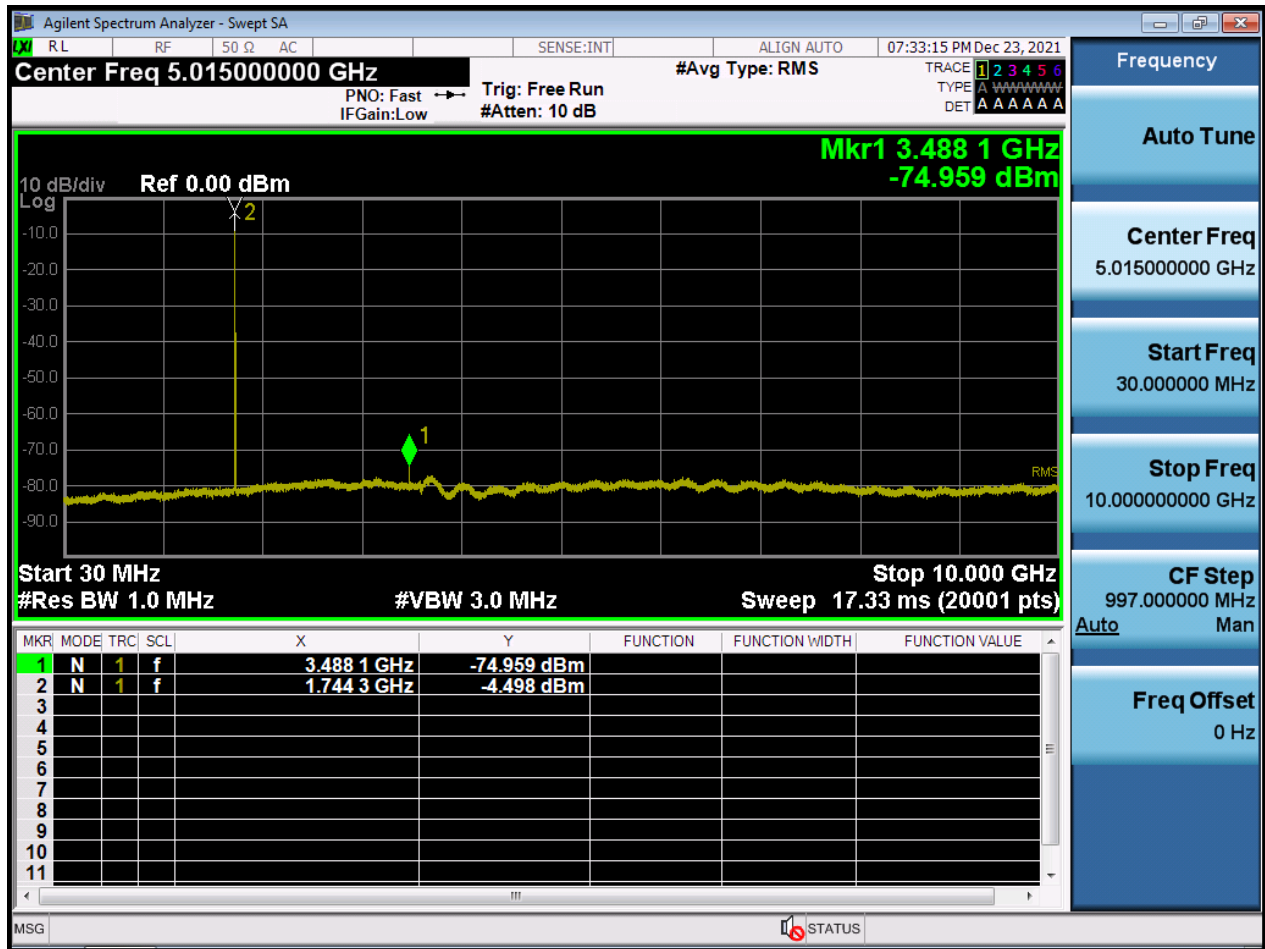


BW3 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

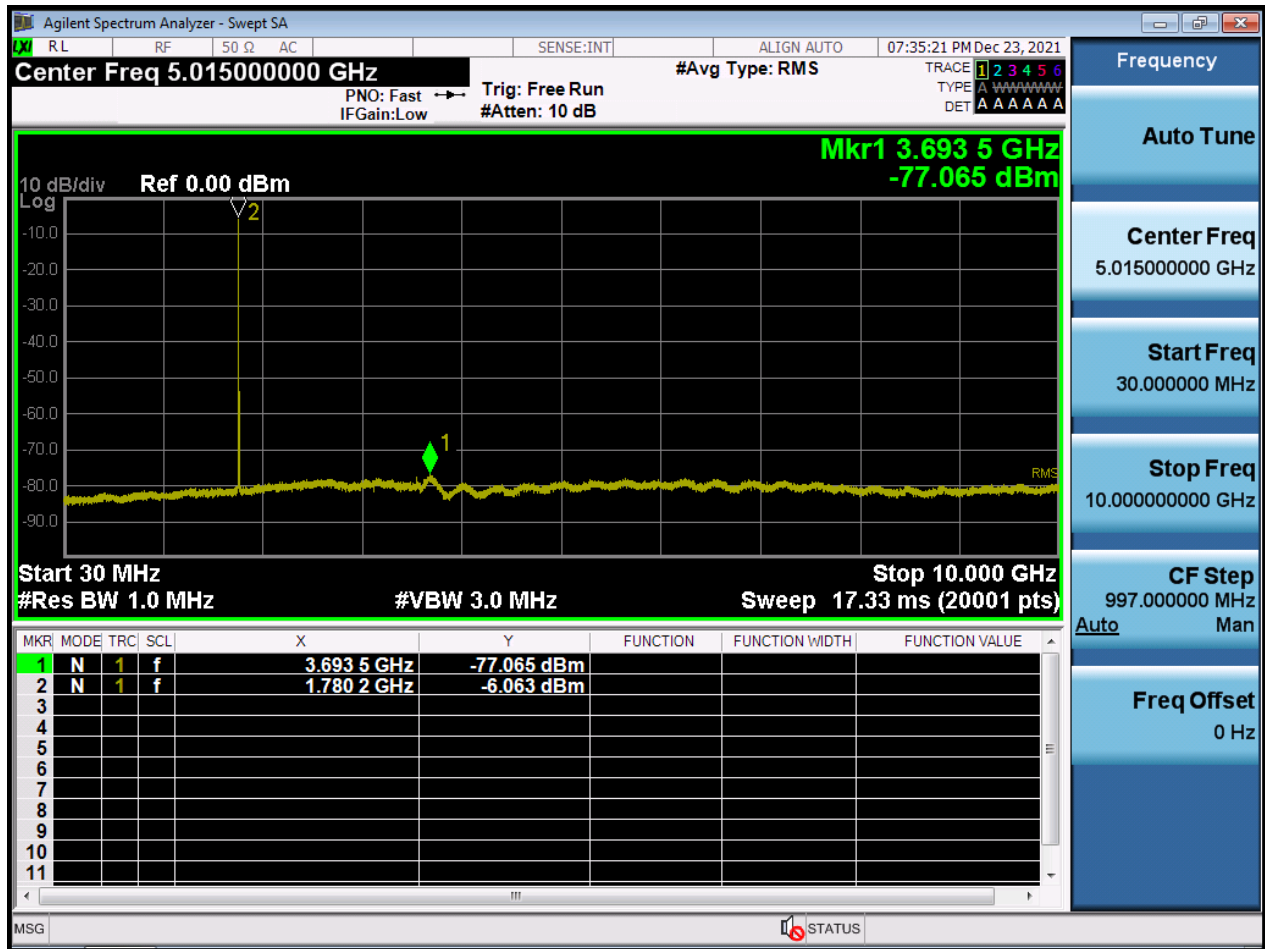


BW5 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

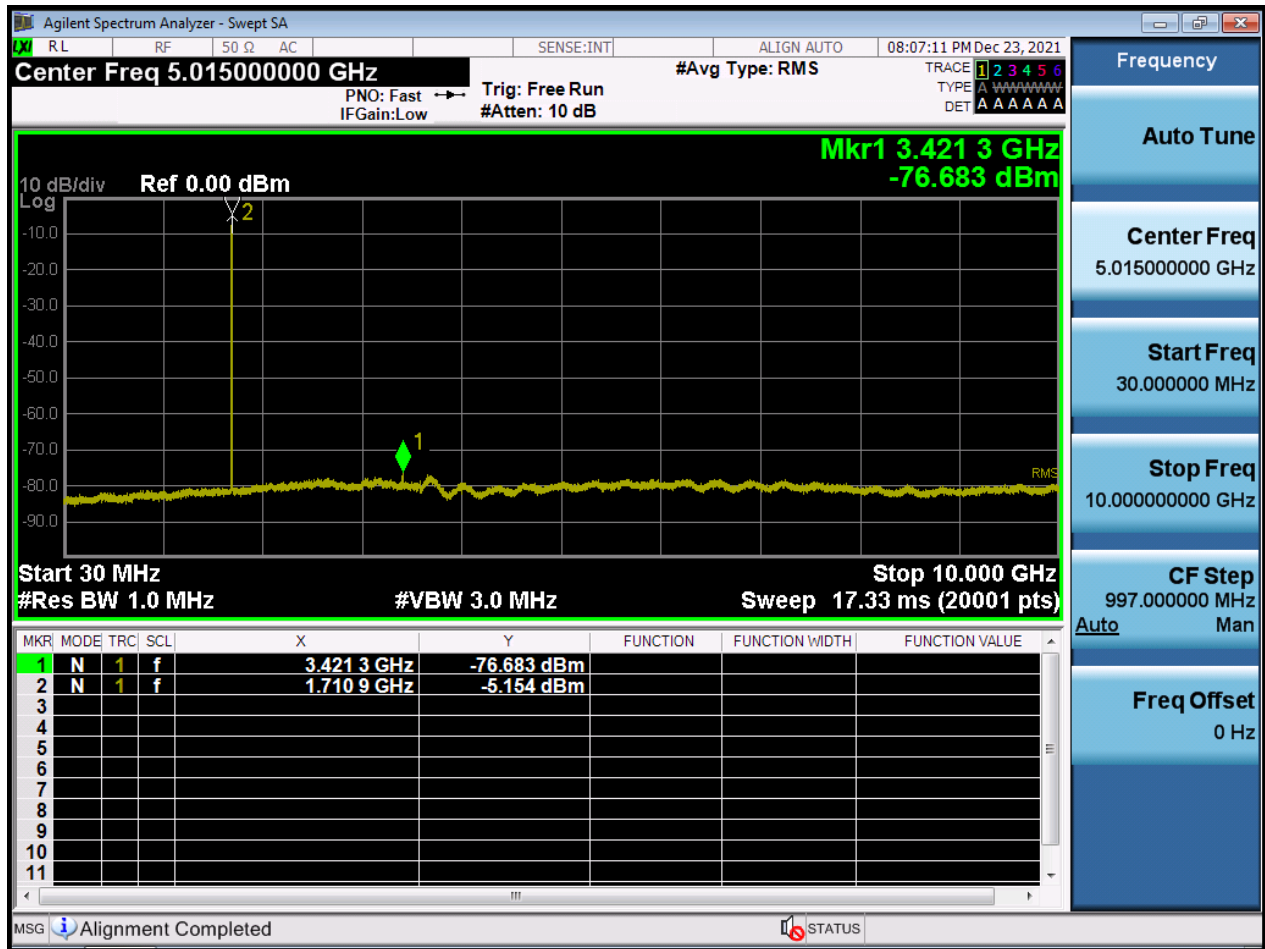


BW5 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

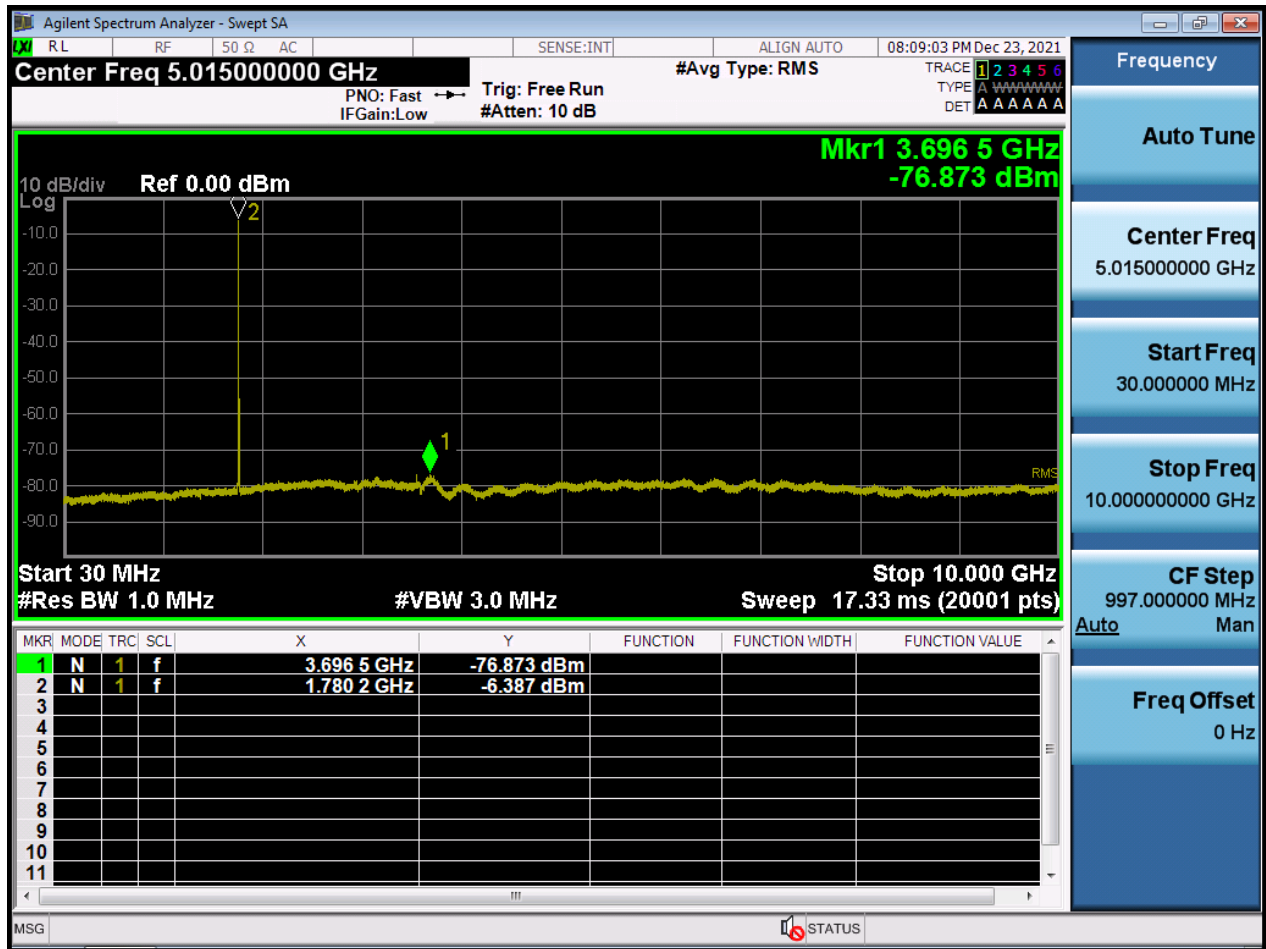


BW10 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

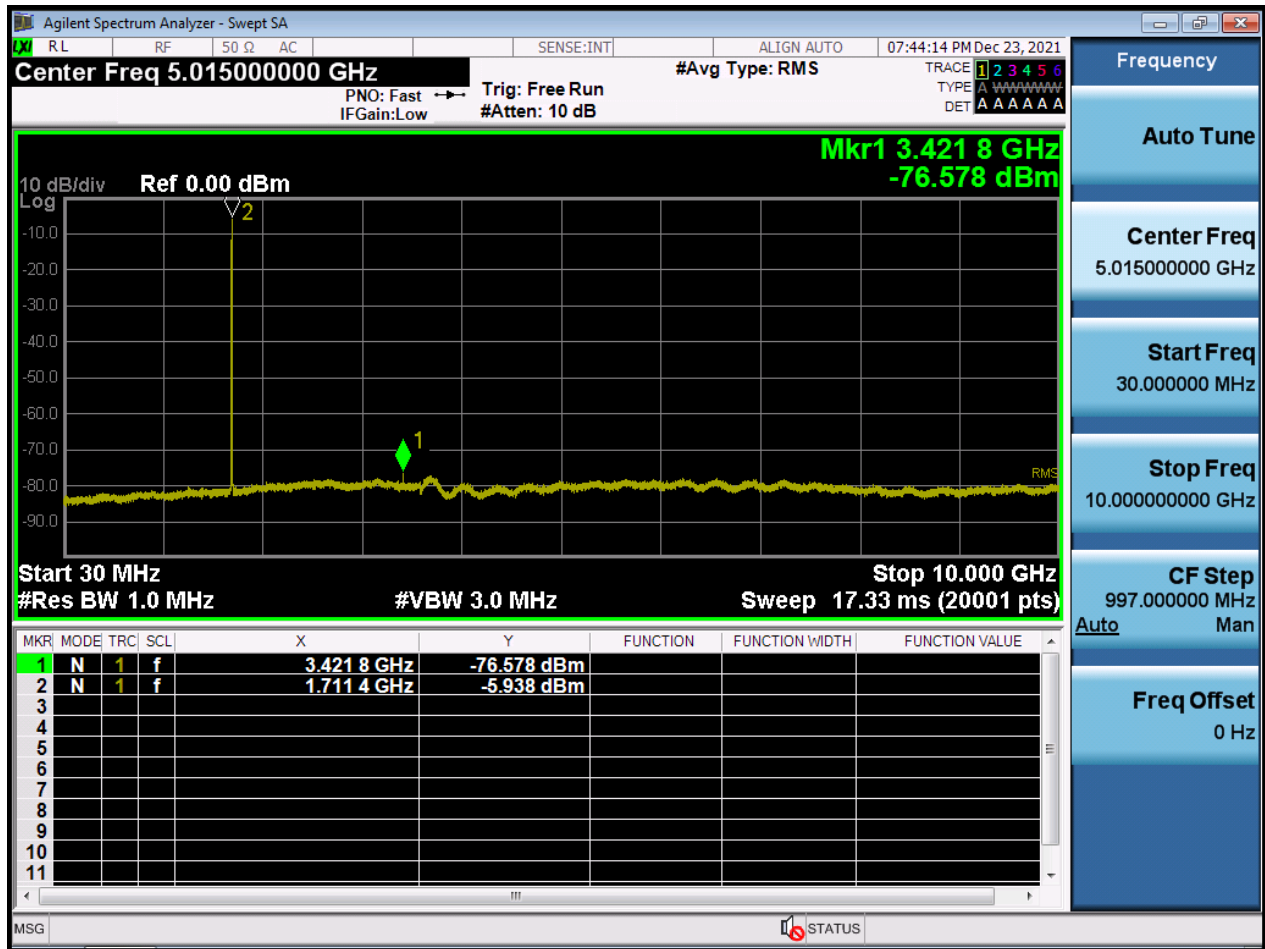


BW10 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

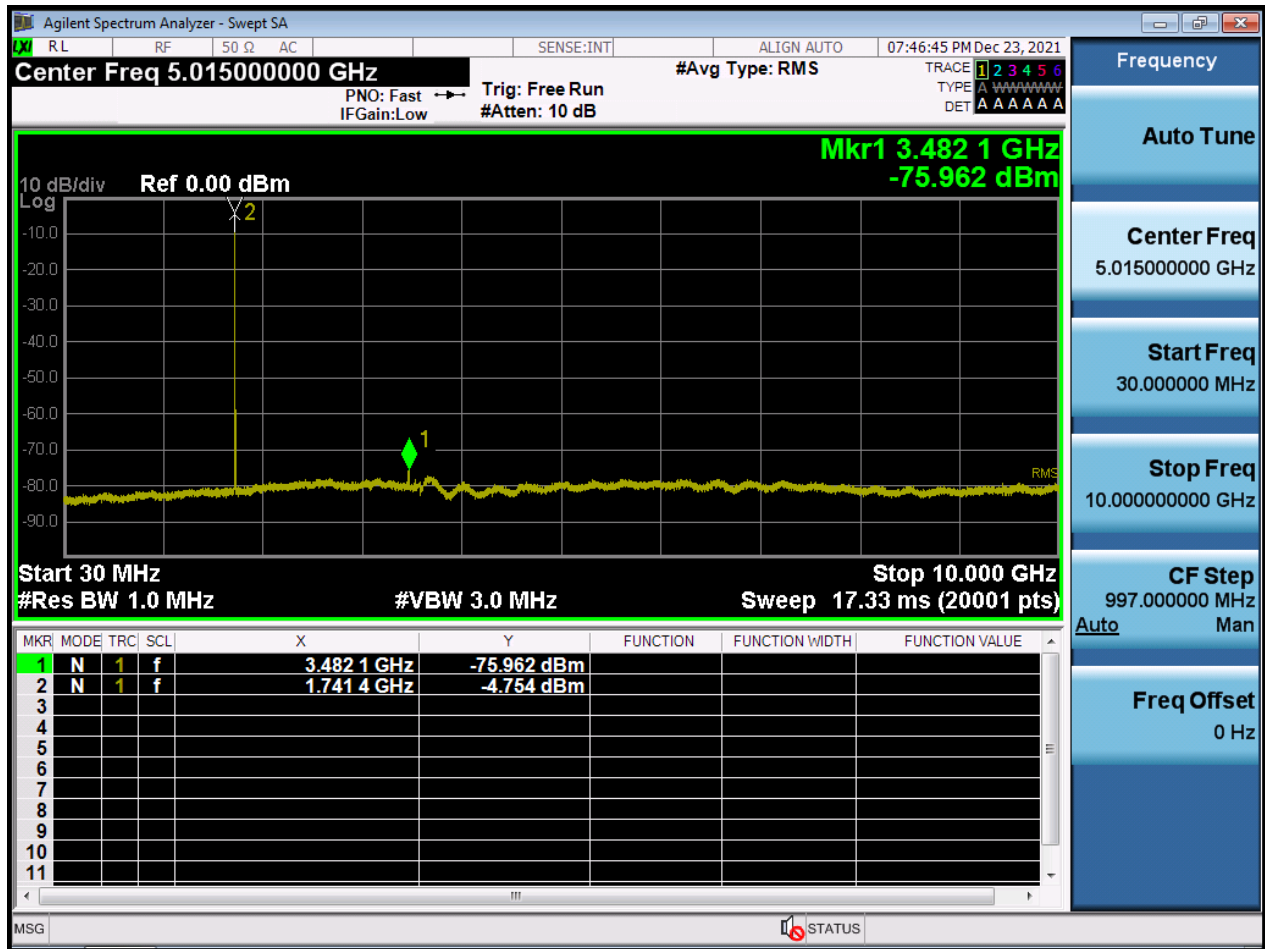


BW10 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

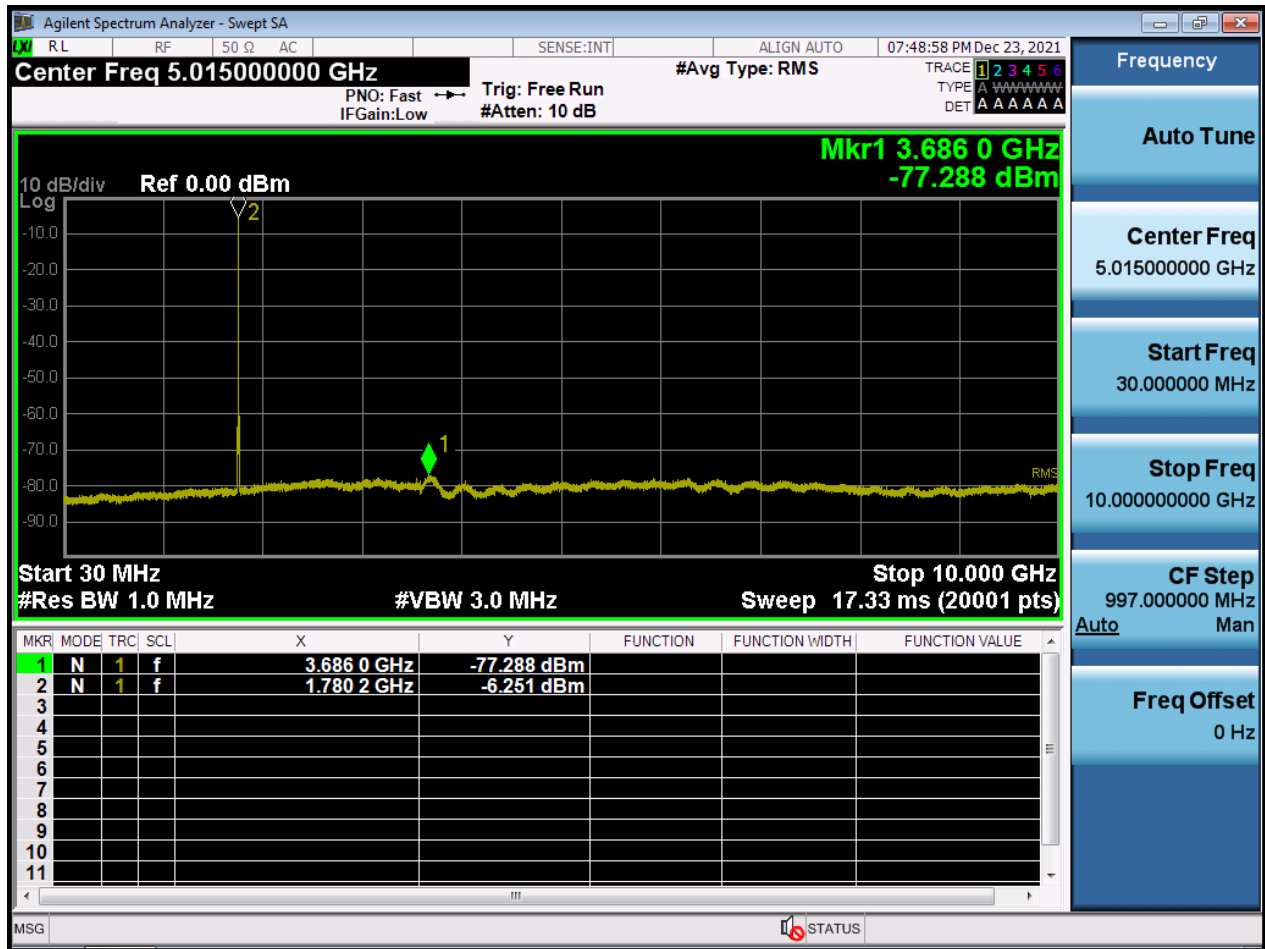


BW15 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

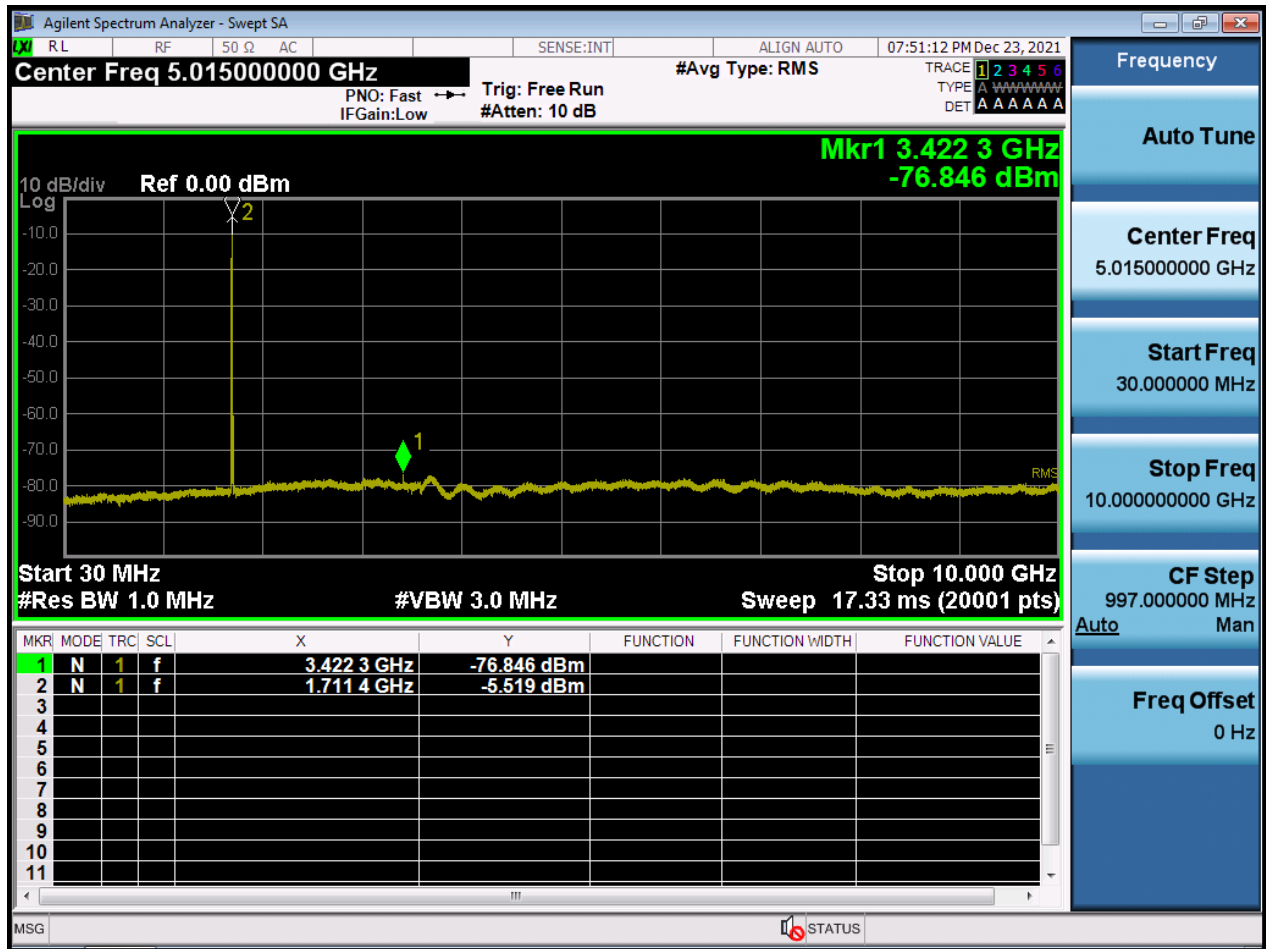


BW15 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

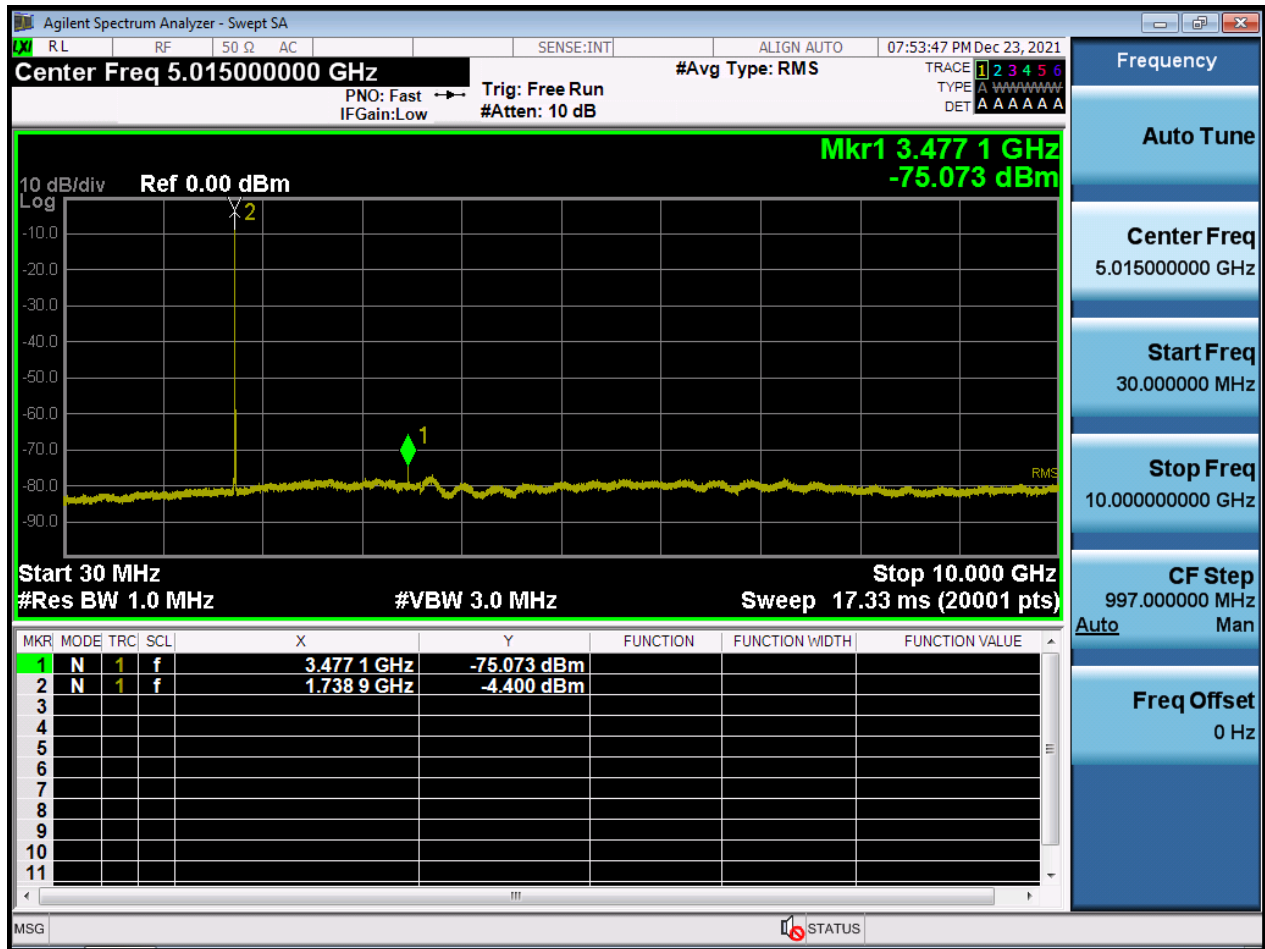


BW15 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

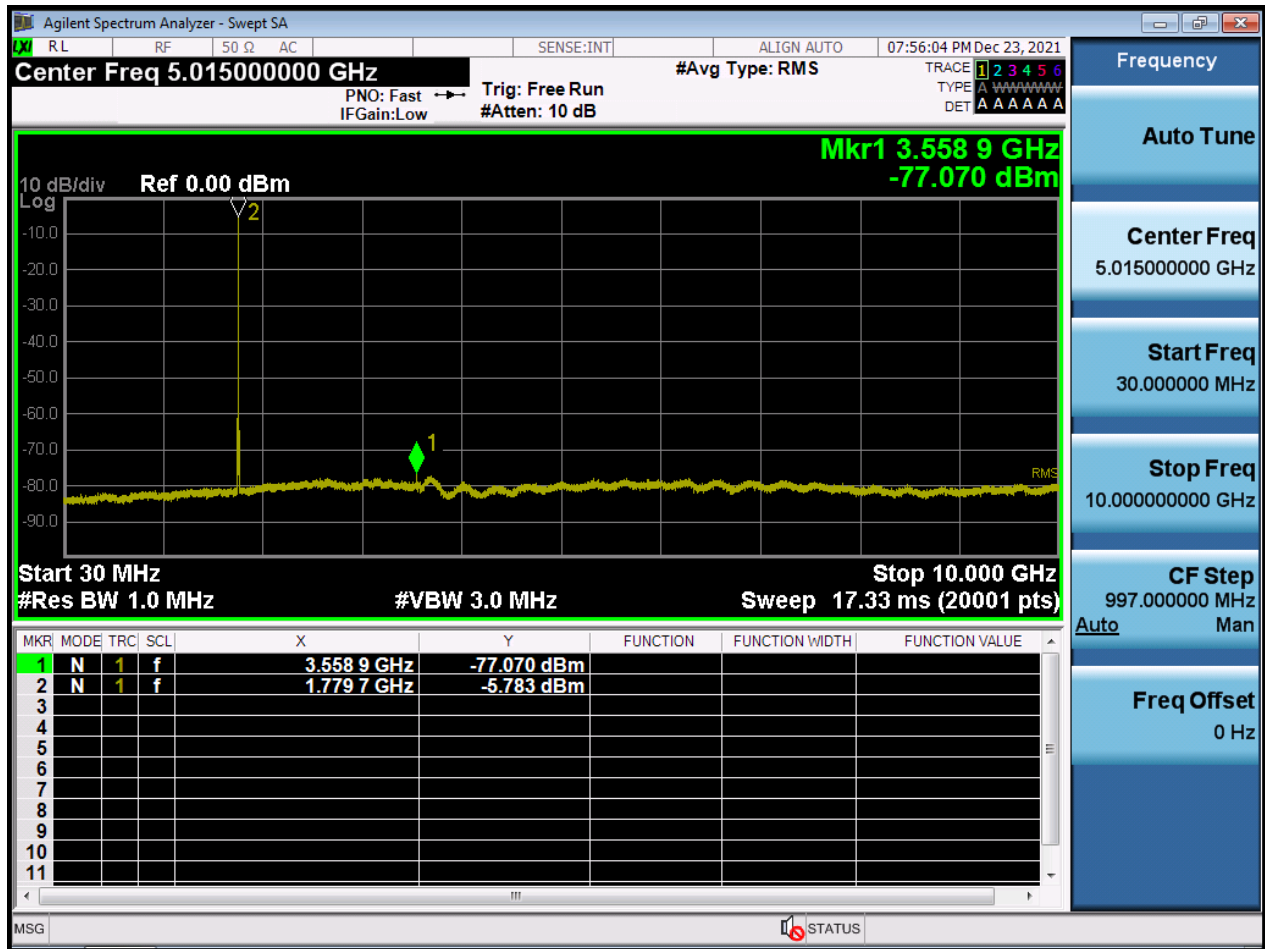


BW20 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

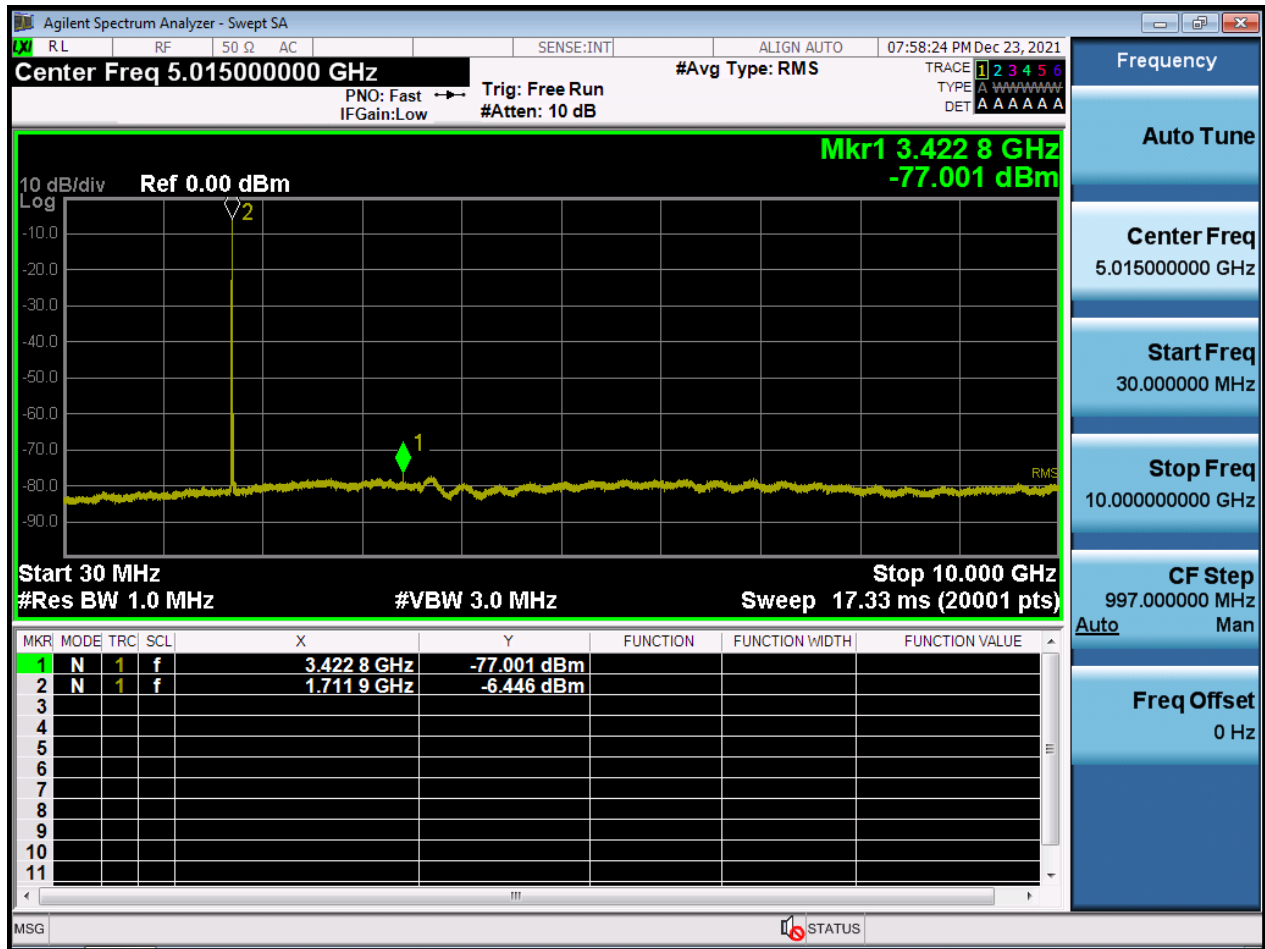

BW20 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

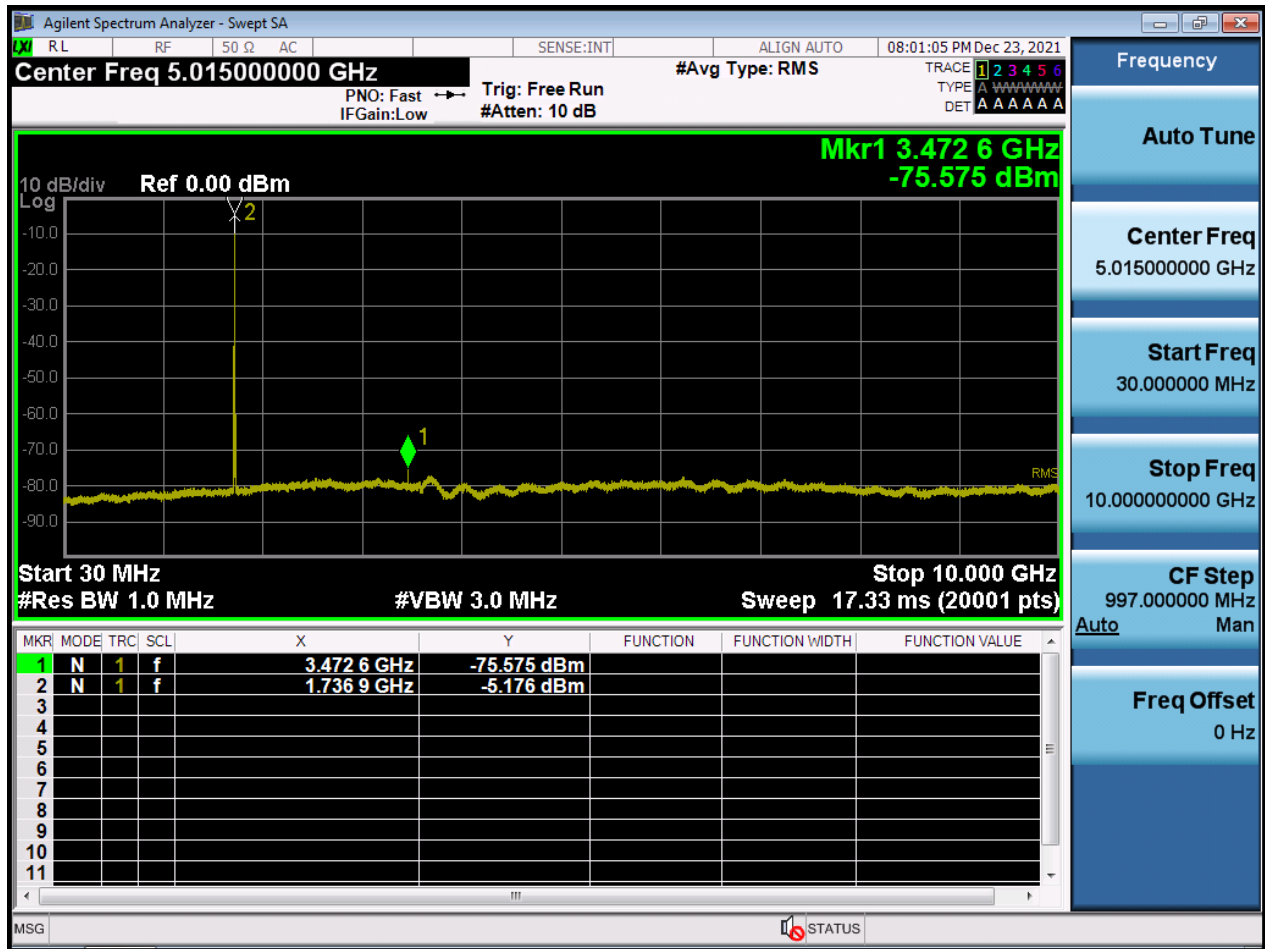

BW20 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

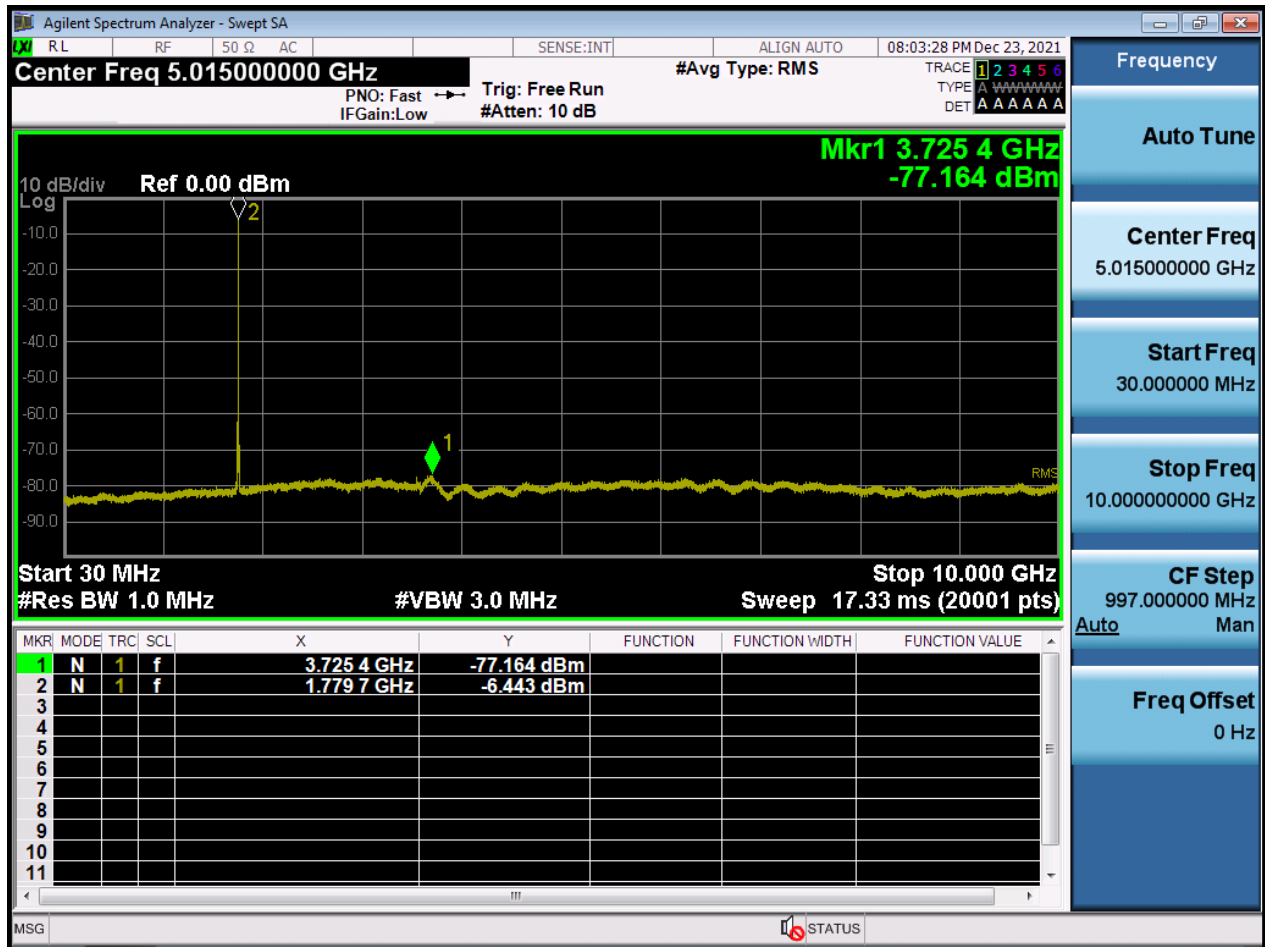

BW1.4 M_CSE(10 G-26.5 G)_Lowest Channel_QPSK_1RB



BW1.4 M_CSE(10 G-26.5 G)_Middle Channel_QPSK_1RB



BW1.4 M_CSE(10 G-26.5 G)_Highest Channel_QPSK_1RB



BW3 M_CSE(10 G-26.5 G)_Lowest Channel_QPSK_1RB



BW3 M_CSE(10 G-26.5 G)_Middle Channel_QPSK_1RB

