



TEST REPORT

<p>KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR20-SPF0004-A Page (1) of (323)</p>	
--	---	---

1. Client

- Name : Samsung Electronics Co., Ltd.
- Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
- Date of Receipt : 2019-12-26

2. Use of Report : Certification

3. Name of Product and Model : Mobile phone
 ◦ Model Number : SM-M315F/DS
 ◦ Manufacturer and Country of Origin: Samsung Electronics Co., Ltd./ Korea

4. FCC ID Number : A3LSMM315F

5. Date of Test : 2020-01-06 ~ 2020-01-22

6. Test Standards : IEEE 1528-2013, ANSI/IEEE C95.1, KDB Publication

7. Test Results : Refer to the test result in the test report

Affirmation	Tested by	Technical Manager
	Name : Hosik Sim (Signature)	Name : Jongwon Ma (Signature)

2020-02-06

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (2) of (323)

**Report revision history**

Date	Revision	Page No
2020-01-31	Initial report	-
2020-02-06	The 2.4G WLAN SAR data was revised due to changes in output power scaled factor.	6,63,65, 76,81,88

Note: The Report No. KR20-SPF0004 is superseded by the report No. KR20-SPF0004-A

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.

This test report is a general report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.



CONTENTS

1. General information.....	4
2. Device information.....	5
3. LTE Information.....	15
4. Specific Absorption Rate	17
5. SAR Measurement Procedures.....	18
6. SAR Measurement Configurations.....	19
7. RF Exposure Limits.....	23
8. FCC SAR General Measurement Procedures.....	24
9. RF Average Conducted Output Power.....	31
10. System Verification	68
11. SAR Test Results	71
12. Simultaneous Transmission.....	92
13. SAR Measurement Variability.....	110
14. Measurement Uncertainty.....	112
15. Test Equipment Information	113
16. Test System Verification Results.....	115
17. Test Results.....	128
Appendixes List.....	186
Appendix A. Calibration certificate	187
Appendix B. SAR Tissue Specification.....	307
Appendix C. Antenna Location & Distance.....	308
Appendix D. EUT Photo	309
Appendix E. Test Setup Photo.....	312
Appendix F. Power Reduction Verification.....	320
End of test report	323

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (4) of (323)



1. General information

Client : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Manufacturer : Samsung Electronics Co., Ltd.
Address : 94-1, Imsu-dong, Gumi-si, Gyengsangbuk-do, 730-722, Republic of Korea
Manufacturer : Samsung India Electronics PVT. Ltd
Address : B-1, Sector-8 NOIDA Uttar Pradeshe, India 201-305
Manufacturer : Samsung Electronics Vietnam Thai Nguyen Co., Ltd
Address : 506-723 16000 Yen Phong 1 Industrial Zone, Yen Trung Commu Yen Phong District Bac Ninh Province Vietnam
Contact Person : BYUNGJAE LEE / kevin1.lee@samsung.com
Laboratory : KCTL Inc.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-3327, G-198, C-3706, T-1849
Industry Canada Registration No. : 8035A
KOLAS No.: KT231

1.1 Report Overview

This report details the results of testing carried out on the samples listed in section 2, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this test report is used in any configuration other than that detailed in the test report, the manufacturer must ensure the new configuration complies with all relevant standards and certification requirements. Any mention of KCTL Inc. Wireless lab or testing done by KCTL Inc. Wireless lab made in connection with the distribution or use of the tested product must be approved in writing by KCTL Inc. Wireless lab.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (5) of (323)



2. Device information

2.1 Basic description

Product Name		Mobile phone				
Product Model Number		SM-M315F/DS				
Product Manufacturer		Samsung Electronics Co., Ltd.				
Product Serial Number	Radiation	R38MC0ANYYE				
		R38MC0ANZCZ				
	Conduction	GSM / WCDMA	R38MC0ANZKH			
		LTE	R38MC0ANYKB			
		WLAN	R38MC0AP17A			
Bluetooth		R38MC0ANXTJ				
Device Overview						
				Band & Mode	Operating Modes	Tx Frequency (MHz)
				GSM/GPRS/EDGE 850	Voice/Data	824.2 ~ 848.8
				GSM/GPRS/EDGE 1900	Voice/Data	1 850.2 ~ 1 909.8
				WCDMA Band II	Voice/Data	1 852.4 ~ 1 907.6
				WCDMA Band IV	Voice/Data	1 712.4 ~ 1 752.6
				WCDMA Band V	Voice/Data	826.4 ~ 846.6
				LTE Band 2	Voice/Data	1 850.7 ~ 1 909.3
				LTE Band 4	Voice/Data	1 710.7 ~ 1 754.3
				LTE Band 5	Voice/Data	824.7 ~ 848.3
				LTE Band 12	Voice/Data	699.7 ~ 715.3
				LTE Band 13	Voice/Data	779.5 ~ 784.5
				LTE Band 17	Voice/Data	706.5 ~ 713.5
				LTE Band 26	Voice/Data	814.7 ~ 848.3
				LTE Band 41	Voice/Data	2 498.5 ~ 2 687.5
				LTE Band 66	Voice/Data	1 710.7 ~ 1 779.3
				2.4 GHz WLAN	Voice/Data	2 412.0 ~ 2 472.0
				U-NII-1	Voice/Data	5 180.0 ~ 5 240.0
				U-NII-2A	Voice/Data	5 260.0 ~ 5 320.0
				U-NII-2C	Voice/Data	5 500.0 ~ 5 720.0
U-NII-3	Voice/Data	5 745.0 ~ 5 825.0				
Bluetooth	Data	2 402.0 ~ 2 480.0				
TDWR Information		5.60 GHz~ 5.65 GHz band (TDWR) is supported by the device.				

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (6) of (323)



2.2 Summary of SAR Test Results

Band	Equipment Class	Highest Reported			
		1g SAR (W/kg)			10g SAR (W/kg)
		Head	Body-Worn	Hotspot	Phablet
GSM/GPRS/EDGE 850	PCE	0.18	0.30	0.30	N/A
GSM/GPRS/EDGE 1900	PCE	0.13	0.18	0.39	N/A
WCDMA Band II	PCE	0.23	0.37	0.72	N/A
WCDMA Band IV	PCE	0.42	0.37	0.67	N/A
WCDMA Band V	PCE	0.19	0.31	0.38	N/A
LTE Band 2	PCE	0.25	0.36	0.73	N/A
LTE Band 4	PCE	0.41	0.41	0.74	N/A
LTE Band 5	PCE	0.22	0.32	0.54	N/A
LTE Band 12	PCE	< 0.1	0.17	0.28	N/A
LTE Band 13	PCE	< 0.1	0.21	0.46	N/A
LTE Band 17	PCE	< 0.1	0.16	0.29	N/A
LTE Band 26	PCE	0.19	0.29	0.40	N/A
LTE Band 41	PCE	0.11	0.26	0.54	N/A
LTE Band 66	PCE	0.35	0.31	0.68	N/A
2.4GHz WLAN	DTS	0.15	0.23	0.48	N/A
U-NII-1	NII	N/A	N/A	0.53	N/A
U-NII-2A	NII	0.25	0.28	N/A	0.86
U-NII-2C	NII	0.40	0.56	N/A	1.57
U-NII-3	NII	0.52	0.69	1.20	N/A
Bluetooth	DSS	< 0.1	< 0.1	< 0.1	N/A
Simultaneous SAR per KDB 690783 D01v01r03		0.82	1.10	1.54	N/A

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (7) of (323)



2.3 Power Reduction for SAR

This device utilizes a power reduction mechanism for some wireless modes and bands for SAR compliance under portable hotspot conditions, under some conditions when the device is being used in close proximity to the user's hand, and when headphones are inserted. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when hotspot is enabled. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device when being used in phablet use conditions. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses an independent fixed level power reduction mechanism for LTE Band 41 operations during voice or VoLTE held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the Head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

2.4 Maximum Tune-up power

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

2.4.1 Maximum 2G/3G/4G Output Power

Band	Mode	Output Power (dBm)		
		Target	Max. Allowed	SAR Test
GSM 850	GSM Voice	33.00	34.00	Yes
	GPRS 1 TX	33.00	34.00	No
	GPRS 2 TX	30.00	31.00	No
	GPRS 3 TX	28.00	29.00	No
	GPRS 4 TX	27.00	28.00	Yes
	EGPRS 1 TX	26.50	27.50	No
	EGPRS 2 TX	24.00	25.00	No
	EGPRS 3 TX	22.50	23.50	No
	EGPRS 4 TX	21.00	22.00	No
GSM 1900	GSM Voice	30.00	31.00	Yes
	GPRS 1 TX	30.00	31.00	No
	GPRS 2 TX	27.50	28.50	No
	GPRS 3 TX	25.50	26.50	No
	GPRS 4 TX	24.50	25.50	Yes
	EGPRS 1 TX	25.00	26.00	No
	EGPRS 2 TX	23.00	24.00	No
	EGPRS 3 TX	22.00	23.00	No
	EGPRS 4 TX	20.00	21.00	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (8) of (323)



Band	Mode	Output Power (dBm)		
		Target	Max. Allowed	SAR Test
WCDMA Band II	RMC	23.50	24.50	Yes
	HSDPA	22.50	23.50	No
	HSUPA	22.50	23.50	No
	DC-HSDPA	22.50	23.50	No
WCDMA Band IV	RMC	24.00	25.00	Yes
	HSDPA	23.00	24.00	No
	HSUPA	23.00	24.00	No
	DC-HSDPA	23.00	24.00	No
WCDMA Band V	RMC	24.00	25.00	Yes
	HSDPA	23.00	24.00	No
	HSUPA	23.00	24.00	No
	DC-HSDPA	23.00	24.00	No
LTE Band 2		24.00	25.00	Yes
LTE Band 4		24.00	25.00	Yes
LTE Band 5		24.50	25.50	Yes
LTE Band 12		24.50	25.50	Yes
LTE Band 13		24.50	25.50	Yes
LTE Band 17		24.50	25.50	Yes
LTE Band 26		24.50	25.50	Yes
LTE Band 41		23.50	24.50	Yes
LTE Band 66		24.00	25.00	Yes

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (9) of (323)



2.4.2 Reduced 2G/3G/4G Output Power – Grip Sensor, Earjack

Band	Mode	Output Power (dBm)		
		Target	Max. Allowed	SAR Test
GSM 1900 (Grip Sensor, Earjack)	GSM Voice	29.00	30.00	No
	GPRS 1 TX	29.00	30.00	No
	GPRS 2 TX	26.50	27.50	No
	GPRS 3 TX	24.50	25.50	No
	GPRS 4 TX	23.50	24.50	No
	EGPRS 1 TX	24.50	25.50	No
	EGPRS 2 TX	22.50	23.50	No
	EGPRS 3 TX	21.50	22.50	No
	EGPRS 4 TX	19.50	20.50	No
WCDMA Band II (Grip Sensor, Earjack)	RMC	21.50	22.50	No
	HSDPA	21.00	22.00	No
	HSUPA	21.00	22.00	No
	DC-HSDPA	21.00	22.00	No
WCDMA Band IV (Grip Sensor, Earjack)	RMC	21.00	22.00	No
	HSDPA	20.00	21.00	No
	HSUPA	20.00	21.00	No
	DC-HSDPA	20.00	21.00	No
LTE Band 2 (Grip Sensor, Earjack)		21.00	22.00	No
LTE Band 4 (Grip Sensor, Earjack)		21.00	22.00	No
LTE Band 66 (Grip Sensor, Earjack)		21.00	22.00	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (10) of (323)



2.4.3 Maximum WLAN and Bluetooth Output Power

Band	Mode	Channel	Output Power (dB m)		
			Target	Max. Allowed	SAR Test
WLAN 2.4 GHz	802.11b	All Channel	18.50	19.50	Yes
	802.11g	All Channel	16.00	17.00	No
	802.11n(HT20)	All Channel	16.00	17.00	No
WLAN 5 GHz	802.11a	36	14.00	15.00	Yes
		Except 36	16.00	17.00	
	802.11n(HT20)	All Channel	16.00	17.00	No
	802.11n(HT40)	All Channel	14.00	15.00	No
	802.11ac(VHT20)	All Channel	16.00	17.00	No
	802.11ac(VHT40)	All Channel	14.00	15.00	No
	802.11ac(VHT80)	All Channel	13.00	14.00	No

Band	Mode	Channel	Output Power (dB m)		
			Target	Max. Allowed	SAR Test
Bluetooth	BDR(GFSK)	All Channel	9.50	10.50	Yes
	EDR ($\pi/4$ DQPSK)	All Channel	7.50	8.50	No
	EDR(8DPSK)	All Channel	7.50	8.50	No
	LE(GFSK)	All Channel	6.50	7.50	No

2.4.4 Reduced WLAN Output Power – RCV

Band	Mode	Channel	Output Power (dB m)		
			Target	Max. Allowed	SAR Test
WLAN 2.4GHz (RCV)	802.11b	All Channel	14.00	15.00	Yes
	802.11g	All Channel	13.00	14.00	No
	802.11n(HT20)	All Channel	13.00	14.00	No
WLAN 5 GHz (RCV)	802.11a	All Channel	13.00	14.00	No
	802.11n(HT20)	All Channel	13.00	14.00	No
	802.11n(HT40)	All Channel	13.00	14.00	No
	802.11ac(VHT20)	All Channel	13.00	14.00	No
	802.11ac(VHT40)	All Channel	13.00	14.00	No
	802.11ac(VHT80)	All Channel	13.00	14.00	Yes

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (11) of (323)



2.5 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix C. Since the diagonal dimension of this device is > 160 mm and < 200 mm, it is considered a "Phablet".

Mode	Device Edge for SAR Testing (Front View)					
	Front	Rear	Left Edge	Right Edge	Top	Bottom
GPRS 850	Yes	Yes	Yes	Yes	No	Yes
GPRS 1900	Yes	Yes	Yes	Yes	No	Yes
WCDMA Band II	Yes	Yes	Yes	Yes	No	Yes
WCDMA Band IV	Yes	Yes	Yes	Yes	No	Yes
WCDMA Band V	Yes	Yes	Yes	Yes	No	Yes
LTE Band 2	Yes	Yes	Yes	Yes	No	Yes
LTE Band 4	Yes	Yes	Yes	Yes	No	Yes
LTE Band 5	Yes	Yes	Yes	Yes	No	Yes
LTE Band 12	Yes	Yes	Yes	Yes	No	Yes
LTE Band 13	Yes	Yes	Yes	Yes	No	Yes
LTE Band 17	Yes	Yes	Yes	Yes	No	Yes
LTE Band 26	Yes	Yes	Yes	Yes	No	Yes
LTE Band 41	Yes	Yes	Yes	Yes	No	Yes
LTE Band 66	Yes	Yes	Yes	Yes	No	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	Yes	No
5 GHz WLAN	Yes	Yes	Yes	No	Yes	No
Bluetooth	Yes	Yes	Yes	No	Yes	No

Note: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 and FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device. When Wireless Router mode is enabled, U-NII-2A, U-NII-2C operations is disabled.

2.6 Simultaneous Transmission Configurations

According to FCC KDB 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

No	Scenario	RF Exposure Condition			
		Head	Body-Worn	Hotspot	Phablet
1	GSM Voice + WLAN 2.4 GHz	Yes	Yes	No	Yes
2	GSM Voice + WLAN 5 GHz	Yes	Yes	No	Yes
3	GSM Voice + 2.4 GHz Bluetooth	Yes	Yes	No	Yes
4	GSM Voice + 2.4 GHz Bluetooth + WLAN 5 GHz	Yes	Yes	No	Yes
5	WCDMA + WLAN 2.4 GHz	Yes	Yes	Yes	Yes
6	WCDMA + WLAN 5 GHz	Yes	Yes	Yes	Yes
7	WCDMA + 2.4 GHz Bluetooth	Yes	Yes	Yes	Yes
8	WCDMA + 2.4 GHz Bluetooth + WLAN 5 GHz	Yes	Yes	Yes	Yes
9	LTE + WLAN 2.4 GHz	Yes	Yes	Yes	Yes
10	LTE + WLAN 5 GHz	Yes	Yes	Yes	Yes
11	LTE + 2.4 GHz Bluetooth	Yes	Yes	Yes	Yes
12	LTE + 2.4 GHz Bluetooth + WLAN 5 GHz	Yes	Yes	Yes	Yes
13	GPRS/EDGE + WLAN 2.4 GHz	Yes	Yes	Yes	Yes
14	GPRS/EDGE + WLAN 5 GHz	Yes	Yes	Yes	Yes
15	GPRS/EDGE + 2.4 GHz Bluetooth	Yes	Yes	Yes	Yes
16	GPRS/EDGE + 2.4 GHz Bluetooth + WLAN 5 GHz	Yes	Yes	Yes	Yes

Notes:

- It does not to transmit simultaneously the Bluetooth and 2.4 GHz WLAN.
- It is to use the Bluetooth and 2.4 GHz WLAN same antenna path.
- WLAN Hotspot is supported for 2.4 GHz and U-NII-1, UNII-3 of 5 GHz WLAN.
- This device supports Bluetooth Tethering.
- This device supports VoLTE.
- This device supports VoWIFI.
- 5 GHz Wireless Router mode is only supported for the UNII-1(Wifi Direct) and UNII-3, therefore U-NII-2A, U-NII-2C were not evaluated for Hotspot mode conditions.

2.7 Miscellaneous SAR Test Considerations

(A) WIFI/Bluetooth

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4GHz, U-NII-1 and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a “phablet” since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz WLAN, Bluetooth, U-NII-1 and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel(mW)}}{\text{Test Separation Distance(mm)}} \times \sqrt{\text{Frequency(GHz)}} \leq 3.0(1g - SAR), 7.5(10g - SAR)$$

Mode	Position	Frequency	Maximum Allowed Power	Separation Distance	≤ 3.0 Not Required	≤ 7.5 Not Required
		MHz	mW	mm	1g-SAR	10g-SAR
Bluetooth	Phablet	2 480.0	11	5	N/A	3.5
Bluetooth LE	Head	2 480.0	6	5	1.9	N/A
	Body-Worn	2 480.0	6	15	0.6	N/A
	Hotspot	2 480.0	6	10	0.9	N/A

Formulas round separation distance to nearest mm and power to nearest mW before calculating thresholds or exemption values.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

2.8 SAR Test Methods and Procedures

The tests documented in this report were performed in accordance with IEEE 1528-2013 and the following published KDB procedures:

- IEEE 1528-2013
- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 616217 D04 SAR for laptop and tablets v01r02 (Proximity Sensor)
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D06 Hotspot Mode v02r01
- October 2014 TCB Workshop Notes (Other LTE Considerations)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)
- April 2019 TCB Workshop Notes (Tissue Simulation Liquids)
- Nov 2019 TCB Workshop Notes (SPLSR Hotspot Combination)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (15) of (323)



3. LTE Information

LTE Information					
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 2 (1 850.7 ~ 1 909.3 MHz) LTE Band 4 (1 710.7 ~ 1 754.3 MHz) LTE Band 5 (824.7 ~ 848.3 MHz) LTE Band 12 (699.7 ~ 715.3 MHz) LTE Band 13 (779.5 ~ 784.5 MHz) LTE Band 17 (706.5 ~ 713.5 MHz) LTE Band 26 (814.7 ~ 848.3 MHz) LTE Band 41 (2498.5 ~ 2687.5 MHz) LTE Band 66 (1 710.7 ~ 1 779.3 MHz)				
Channel Bandwidths	LTE Band 2: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 4: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 5: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 13: 5 MHz, 10 MHz LTE Band 17: 5 MHz, 10 MHz LTE Band 26: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 66: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 2: 1.4 MHz	1850.7 (18607)		1880.0 (18900)		1909.3 (19193)
LTE Band 2: 3 MHz	1851.5 (18615)		1880.0 (18900)		1908.5 (19185)
LTE Band 2: 5 MHz	1852.5 (18625)		1880.0 (18900)		1907.5 (19175)
LTE Band 2: 10 MHz	1855.0 (18650)		1880.0 (18900)		1905.0 (19150)
LTE Band 2: 15 MHz	1857.5 (18675)		1880.0 (18900)		1902.5 (19125)
LTE Band 2: 20 MHz	1860.0 (18700)		1880.0 (18900)		1900.0 (19100)
LTE Band 4: 1.4 MHz	1710.7 (19957)		1732.5 (20175)		1754.3 (20393)
LTE Band 4: 3 MHz	1711.5 (19965)		1732.5 (20175)		1753.5 (20385)
LTE Band 4: 5 MHz	1712.5 (19975)		1732.5 (20175)		1752.5 (20375)
LTE Band 4: 10 MHz	1715.0 (20000)		1732.5 (20175)		1750.0 (20350)
LTE Band 4: 15 MHz	1717.5 (20025)		1732.5 (20175)		1747.5 (20325)
LTE Band 4: 20 MHz	1720.0 (20050)		1732.5 (20175)		1745.0 (20300)
LTE Band 5: 1.4 MHz	824.7 (20407)		836.5 (20525)		848.3 (20643)
LTE Band 5: 3 MHz	825.5 (20415)		836.5 (20525)		847.5 (20635)
LTE Band 5: 5 MHz	826.5 (20425)		836.5 (20525)		846.5 (20625)
LTE Band 5: 10 MHz	829.0 (20450)		836.5 (20525)		844.0 (20600)
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)		715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)		714.5 (23655)
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)		713.5 (23155)
LTE Band 12: 10 MHz	704.0 (23060)		707.5 (23095)		711.0 (23130)

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (16) of (323)



Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 13: 5 MHz	779.5 (23205)		782.0 (23230)	784.5 (23255)	
LTE Band 13: 10 MHz	-		782.0 (23230)	-	
LTE Band 17: 5 MHz	706.5 (23755)		710.0 (23790)	713.5 (23825)	
LTE Band 17: 10 MHz	709.0 (23780)		710.0 (23790)	711.0 (23800)	
LTE Band 26: 1.4 MHz	814.7 (26697)		831.5 (26865)	848.3 (27033)	
LTE Band 26: 3 MHz	815.5 (26705)		831.5 (26865)	847.5 (27025)	
LTE Band 26: 5 MHz	816.5 (26715)		831.5 (26865)	846.5 (27015)	
LTE Band 26: 10 MHz	819.0 (26740)		831.5 (26865)	844.0 (26990)	
LTE Band 26: 15 MHz	821.5 (26765)		831.5 (26865)	841.5 (26965)	
LTE Band 41: 5 MHz	2506.0 (39750)	2549.5 (40185)	2593.0 (40620)	2636.5 (41055)	2680.0 (41490)
LTE Band 41: 10 MHz	2506.0 (39750)	2549.5 (40185)	2593.0 (40620)	2636.5 (41055)	2680.0 (41490)
LTE Band 41: 15 MHz	2506.0 (39750)	2549.5 (40185)	2593.0 (40620)	2636.5 (41055)	2680.0 (41490)
LTE Band 41: 20 MHz	2506.0 (39750)	2549.5 (40185)	2593.0 (40620)	2636.5 (41055)	2680.0 (41490)
LTE Band 66: 1.4 MHz	1710.7 (131979)		1745.0 (132322)	1779.3 (132665)	
LTE Band 66: 3 MHz	1711.5 (131987)		1745.0 (132322)	1778.5 (132657)	
LTE Band 66: 5 MHz	1712.5 (131997)		1745.0 (132322)	1777.5 (132647)	
LTE Band 66: 10 MHz	1715.0 (132022)		1745.0 (132322)	1775.0 (132622)	
LTE Band 66: 15 MHz	1717.5 (132047)		1745.0 (132322)	1772.5 (132597)	
LTE Band 66: 20 MHz	1720.0 (132072)		1745.0 (132322)	1770.0 (132572)	
UE Category	4				
Modulations Supported in UL	QPSK, 16QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3 ~ 6.2.5?(manufacturer attestation to be provided)	YES				
A-MPR(Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	This device not supports LTE CA aggregation.				
LTE Additional Information	The following LTE Release 10 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

4. Specific Absorption Rate

4.1 Introduction

The SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational / controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement Procedures

5.1 SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan & Zoom Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot and Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly. Area Scan & Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm ± 1 mm	$\frac{1}{2} \delta \cdot \ln(2)$ mm 0.5 mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°	
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

6. SAR Measurement Configurations

6.1 Ear Reference Point

Figure 1 shows the front, back and side views of the SAM phantom. The “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck – Front) is perpendicular to the reference plane and passing through the LE (or RE) is called the Reference Pivoting Line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.



Figure 1
Close-Up Side view of ERP

6.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 2
Front, back and side view of SAM Twin Phantom

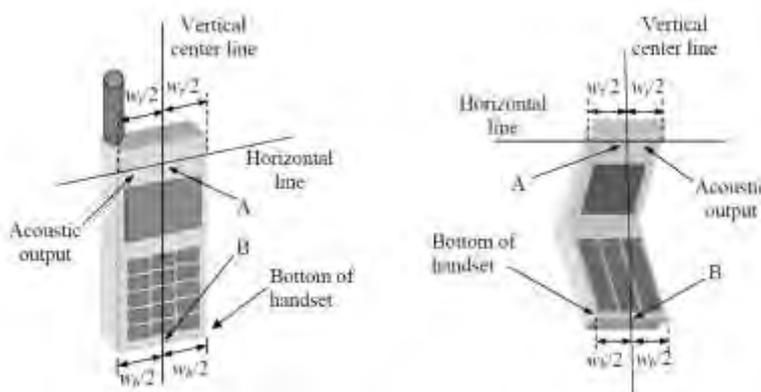


Figure 3
Handset Vertical Center & Horizontal Line Reference Points

6.3 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.4 Positioning for Cheek/Touch

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 4), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 4: Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 5).

6.5 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 5).



Figure 5: Front, Side and Top View of Ear/ 15° Tilt




Figure 6: Side view w/ relevant markings

6.6 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 7). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.



Figure 7
Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

6.8 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤ 25 mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR > 1.2 W/kg.

6.9 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close to the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions.

7. RF Exposure Limits

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR ¹⁾ (Partial)	1.60 mW/g	8.00 mW/g
Partial Average SAR ²⁾ (Whole Body)	0.08 mW/g	0.40 mW/g
Partial Peak SAR ³⁾ (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

- 1) The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2) The spatial Average value of the SAR averaged over the whole body.
- 3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8. FCC SAR General Measurement Procedures

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 "3G SAR Measurement Procedures."

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for UMTS

8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in sec. 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

8.4.3 Body SAR measurements

SAR for body exposure configurations is measured using the 12.2kbps RMC with the TPC bits all "1s". the 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using and applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported SAR configuration in 12.2kbps RMC.

8.4.4 SAR Measurements with Rel. 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using and FRC with H-SET 1 in Sub-test and a 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to release 6 HSPA test procedures. 8.4.5 SAR Measurement with Rel.6 HSUPA The 3G SAR test Reduction Procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, Using H-Set 1 and QPSK for FRC and a 12.2kbps RMC configured in Test Loop Mode 1 and Power Control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.4.5 SAR Measurements with Rel. 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

8.4.6 SAR Measurements with Rel. 8 DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable

8.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r05 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluation SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator

8.5.4 Required RB Size and RB offsets for SAR testing

According to FCC KDB 941225 D05v02r05

1. Per sec 4.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - a. The required channel and offset combination with the highest maximum output power is required for SAR.
 - b. When the reported SAR is ≤ 0.8 W/Kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - c. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel
2. Per Sec 4.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Sec 4.2.1.
3. Per Sec. 4.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
4. Per Sec. 4.2.4 and 4.3, SAR test for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sec. 4.2.1 through 4.2.3 is less than or equal to 1/2 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/Kg.

8.5.5 LTE(TDD) Considerations

According to KDB 941225 D05v02r05, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33 %) using Uplink-downlink configuration 0 and Special sub-frame configuration 6.

LTE TDD Band supports 3GPP TS 36.211 section 4.2 for Type 2 Frame and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special sub frame configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration n	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$	$20480 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-
10	$13168 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle – Extended cyclic prefix in uplink x (Ts) x # of S + # of U

Example for calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $(5120 \times [1/(15000 \times 2048)] \times 2 + 0.006)/0.01 = 63.33 \%$

$T_s = 1/(15000 \times 2048)$ seconds

8.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 – 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency point requirements.

8.6.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

8.6.5 2.4 GHz SAR Test Requirement

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following.

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM are additionally evaluated for SAR if highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.6.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz band, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel band width, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.6.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (30) of (323)



8.6.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.



KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (31) of (323)



9. RF Average Conducted Output Power

9.1 GSM Average Conducted Output Power (Maximum Average Power)

Maximum Burst-Average Output Power (dB m)										
Band	Channel	GSM	GPRS (GMSK)				EGPRS (8-PSK)			
		Voice	1Tx	2Tx	3Tx	4Tx	1Tx	2Tx	3Tx	4Tx
GSM 850	128	32.82	32.90	30.45	28.93	27.89	26.20	24.46	22.81	21.39
	190	32.68	32.73	30.29	28.75	27.93	26.10	24.31	22.65	21.24
	251	32.72	32.74	30.27	28.73	27.89	26.10	24.26	22.60	21.14
GSM 1900	512	30.05	30.09	27.52	25.92	24.89	25.88	23.81	22.34	20.79
	661	30.13	30.17	27.66	26.23	24.99	26.00	23.97	22.44	20.93
	810	29.97	30.02	27.43	26.03	24.80	25.86	23.82	22.27	20.99

Maximum Frame-Average Output Power (dB m)										
Band	Channel	GSM	GPRS (GMSK)				EGPRS (8-PSK)			
		Voice	1Tx	2Tx	3Tx	4Tx	1Tx	2Tx	3Tx	4Tx
GSM 850	128	23.79	23.87	24.43	24.67	24.88	17.17	18.44	18.55	18.38
	190	23.65	23.70	24.27	24.49	24.92	17.07	18.29	18.39	18.23
	251	23.69	23.71	24.25	24.47	24.88	17.07	18.24	18.34	18.13
GSM 1900	512	21.02	21.06	21.50	21.66	21.88	16.85	17.79	18.08	17.78
	661	21.10	21.14	21.64	21.97	21.98	16.97	17.95	18.18	17.92
	810	20.94	20.99	21.41	21.77	21.79	16.83	17.80	18.01	17.98
GSM 850	Frame Avg, Target	24.97	24.97	24.98	24.74	24.99	18.47	18.98	19.24	18.99
GSM 1900		21.97	21.97	22.48	22.24	22.49	16.97	17.98	18.74	17.99

9.2 GSM Average Conducted Output Power (Reduced Average Power)

Maximum Burst-Average Output Power (dB m)										
Band	Channel	GSM	GPRS (GMSK)				EGPRS (8-PSK)			
		Voice	1Tx	2Tx	3Tx	4Tx	1Tx	2Tx	3Tx	4Tx
GSM 1900	512	29.45	29.42	27.01	25.29	24.09	25.22	23.24	21.85	20.34
	661	29.56	29.54	27.23	25.48	24.49	25.39	23.42	21.98	20.50
	810	29.43	29.41	27.10	25.41	24.34	25.20	23.27	21.85	20.42

Maximum Frame-Average Output Power (dB m)										
Band	Channel	GSM	GPRS (GMSK)				EGPRS (8-PSK)			
		Voice	1Tx	2Tx	3Tx	4Tx	1Tx	2Tx	3Tx	4Tx
GSM 1900	512	20.42	20.39	20.99	21.03	21.08	16.19	17.22	17.59	17.33
	661	20.53	20.51	21.21	21.22	21.48	16.36	17.40	17.72	17.49
	810	20.40	20.38	21.08	21.15	21.33	16.17	17.25	17.59	17.41
GSM 1900	Frame Avg, Target	20.97	20.97	21.48	21.24	21.49	16.47	17.48	18.24	17.49

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (32) of (323)



9.3 WCDMA Average Conducted Output Power (Maximum Average Power)

Band	Mode	Average Conducted Power (dB m)			3GPP MPR [dB]
		Channel			
		9 262	9 400	9 538	
WCDMA Band II	RMC	23.72	24.12	24.19	-
	HSDPA-Subtest 1	21.69	22.69	22.54	0
	HSDPA-Subtest 2	21.77	21.91	21.80	0
	HSDPA-Subtest 3	21.04	21.24	21.08	0.5
	HSDPA-Subtest 4	21.04	21.23	21.08	0.5
	HSUPA-Subtest 1	21.65	21.80	21.70	0
	HSUPA-Subtest 2	20.30	20.42	20.23	2
	HSUPA-Subtest 3	22.43	22.50	22.47	1
	HSUPA-Subtest 4	20.29	20.41	20.24	2
	HSUPA-Subtest 5	23.39	23.50	23.40	0
	DC-HSDPA-Subtest 1	22.51	22.68	22.55	0
	DC-HSDPA-Subtest 2	21.74	21.90	21.75	0
	DC-HSDPA-Subtest 3	21.02	21.19	21.06	0.5
DC-HSDPA-Subtest 4	21.03	21.23	21.05	0.5	

Band	Mode	Average Conducted Power (dB m)			3GPP MPR [dB]
		Channel			
		1 312	1 412	1 513	
WCDMA Band IV	RMC	24.58	24.87	25.00	-
	HSDPA-Subtest 1	23.58	23.88	24.00	0
	HSDPA-Subtest 2	23.67	23.93	23.89	0
	HSDPA-Subtest 3	22.66	22.90	23.04	0.5
	HSDPA-Subtest 4	22.69	22.90	23.03	0.5
	HSUPA-Subtest 1	22.11	22.38	22.50	0
	HSUPA-Subtest 2	20.01	20.06	20.18	2
	HSUPA-Subtest 3	22.19	22.43	22.53	1
	HSUPA-Subtest 4	20.07	20.08	20.00	2
	HSUPA-Subtest 5	22.89	23.27	23.43	0
	DC-HSDPA-Subtest 1	23.48	23.87	24.00	0
	DC-HSDPA-Subtest 2	23.68	23.92	24.00	0
	DC-HSDPA-Subtest 3	22.65	22.98	23.06	0.5
DC-HSDPA-Subtest 4	22.68	22.92	23.03	0.5	

Band	Mode	Average Conducted Power (dB m)			3GPP MPR [dB]
		Channel			
		4 132	4 183	4 233	
WCDMA Band V	RMC	24.66	24.68	24.62	-
	HSDPA-Subtest 1	23.57	23.55	23.47	0
	HSDPA-Subtest 2	22.79	22.77	22.61	0
	HSDPA-Subtest 3	22.83	22.80	22.72	0.5
	HSDPA-Subtest 4	21.73	21.75	21.58	0.5
	HSUPA-Subtest 1	22.66	22.65	22.52	0
	HSUPA-Subtest 2	20.58	20.60	20.46	2
	HSUPA-Subtest 3	22.72	22.71	22.35	1
	HSUPA-Subtest 4	20.59	20.56	20.50	2
	HSUPA-Subtest 5	22.67	22.67	22.60	0
	DC-HSDPA-Subtest 1	23.55	23.57	23.48	0
	DC-HSDPA-Subtest 2	22.74	22.74	22.69	0
	DC-HSDPA-Subtest 3	22.77	22.78	22.73	0.5
DC-HSDPA-Subtest 4	21.75	21.74	21.68	0.5	

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (33) of (323)



9.4 WCDMA Average Conducted Output Power (Reduced Average Power)

Band	Mode	Average Conducted Power (dB m)			3GPP MPR [dB]
		Channel			
		9 262	9 400	9 538	
WCDMA Band II	RMC	22.08	22.22	22.23	-
	HSDPA-Subtest 1	21.95	21.99	21.99	0
	HSDPA-Subtest 2	21.84	21.91	21.85	0
	HSDPA-Subtest 3	20.90	21.07	20.89	0
	HSDPA-Subtest 4	20.89	21.06	20.89	0
	HSUPA-Subtest 1	21.37	21.53	21.43	0
	HSUPA-Subtest 2	20.33	20.46	20.27	0
	HSUPA-Subtest 3	21.49	21.66	21.56	0
	HSUPA-Subtest 4	20.31	20.48	20.26	0
	HSUPA-Subtest 5	21.93	21.97	21.96	0
	DC-HSDPA-Subtest 1	21.87	21.90	21.98	0
	DC-HSDPA-Subtest 2	21.84	22.00	21.85	0
	DC-HSDPA-Subtest 3	20.93	21.06	20.89	0
DC-HSDPA-Subtest 4	20.88	21.07	20.87	0	

Band	Mode	Average Conducted Power (dB m)			3GPP MPR [dB]
		Channel			
		1 312	1 412	1 513	
WCDMA Band IV	RMC	21.53	21.73	21.94	-
	HSDPA-Subtest 1	20.58	20.99	20.91	0
	HSDPA-Subtest 2	20.83	20.98	20.94	0
	HSDPA-Subtest 3	20.88	20.95	20.96	0
	HSDPA-Subtest 4	20.85	20.90	20.97	0
	HSUPA-Subtest 1	20.93	20.98	20.94	0
	HSUPA-Subtest 2	19.64	19.91	20.00	0
	HSUPA-Subtest 3	20.75	20.92	20.96	0
	HSUPA-Subtest 4	19.66	19.95	20.03	0
	HSUPA-Subtest 5	20.98	20.99	21.00	0
	DC-HSDPA-Subtest 1	20.51	20.99	20.90	0
	DC-HSDPA-Subtest 2	20.80	20.97	20.99	0
	DC-HSDPA-Subtest 3	20.82	20.93	20.93	0
	DC-HSDPA-Subtest 4	20.78	20.90	20.91	0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (34) of (323)



9.5 LTE Average Conducted Output Power (Maximum Average Power)

9.5.1 LTE Band 2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 700	18 900	19 100	
				1 860.0 MHz	1 880.0 MHz	1 900.0 MHz	
20 MHz	QPSK	1	0	23.82	23.88	23.68	0
		1	49	23.84	24.05	23.98	0
		1	99	23.79	23.86	23.88	0
		50	0	23.15	23.27	23.18	1
		50	24	23.17	23.32	23.25	1
		50	50	23.15	23.23	23.21	1
		100	0	23.16	23.27	23.21	1
	16QAM	1	0	23.27	23.46	22.99	1
		1	49	23.28	23.36	23.06	1
		1	99	23.26	23.35	23.14	1
		50	0	22.14	22.23	22.20	2
		50	24	22.14	22.22	22.22	2
		50	50	22.13	22.24	22.28	2
		100	0	22.18	22.30	22.27	2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 675	18 900	19 125	
				1 857.5 MHz	1 880.0 MHz	1 902.5 MHz	
15 MHz	QPSK	1	0	23.57	23.66	23.84	0
		1	36	23.61	23.68	23.76	0
		1	74	23.57	23.60	23.74	0
		36	0	23.19	23.25	23.26	1
		36	18	23.17	23.27	23.25	1
		36	37	23.20	23.28	23.28	1
		75	0	23.20	23.28	23.30	1
	16QAM	1	0	23.14	22.98	22.92	1
		1	36	23.18	22.95	23.11	1
		1	74	23.18	22.98	23.02	1
		36	0	22.16	22.29	22.28	2
		36	18	22.17	22.34	22.30	2
		36	37	22.14	22.32	22.35	2
		75	0	22.23	22.25	22.22	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (35) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 650	18 900	19 150	
				1 855.0 MHz	1 880.0 MHz	1 905.0 MHz	
10 MHz	QPSK	1	0	23.59	23.67	23.55	0
		1	25	23.62	23.64	23.58	0
		1	49	23.58	23.68	23.61	0
		25	0	23.20	23.27	23.21	1
		25	12	23.15	23.24	23.19	1
		25	25	23.17	23.24	23.23	1
		50	0	23.22	23.30	23.22	1
	16QAM	1	0	23.05	23.10	23.06	1
		1	25	23.16	23.00	23.17	1
		1	49	23.06	23.07	23.09	1
		25	0	22.20	22.34	22.32	2
		25	12	22.13	22.29	22.33	2
		25	25	22.13	22.32	22.36	2
		50	0	22.22	22.31	22.28	2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 625	18 900	19 175	
				1 852.5 MHz	1 880.0 MHz	1 907.5 MHz	
5 MHz	QPSK	1	0	23.61	24.02	23.54	0
		1	12	23.66	24.04	23.59	0
		1	24	23.57	23.86	23.61	0
		12	0	23.20	23.24	23.22	1
		12	7	23.15	23.28	23.27	1
		12	13	23.16	23.27	23.27	1
		25	0	23.18	23.26	23.22	1
	16QAM	1	0	22.70	23.18	23.09	1
		1	12	22.85	23.69	23.08	1
		1	24	22.68	23.59	23.52	1
		12	0	22.08	22.18	22.16	2
		12	7	22.08	22.23	22.20	2
		12	13	22.06	22.24	22.25	2
		25	0	22.12	22.24	22.22	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (36) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 615	18 900	19 185	
				1 851.5 MHz	1 880.0 MHz	1 908.5 MHz	
3 MHz	QPSK	1	0	23.57	23.92	23.82	0
		1	8	23.63	23.82	24.00	0
		1	14	23.61	23.82	23.79	0
		8	0	23.18	23.28	23.25	1
		8	4	23.18	23.28	23.20	1
		8	7	23.19	23.29	23.22	1
		15	0	23.15	23.27	23.26	1
	16QAM	1	0	22.97	23.10	23.05	1
		1	8	22.96	23.28	23.09	1
		1	14	22.78	23.28	23.10	1
		8	0	22.36	22.31	22.22	2
		8	4	22.33	22.30	22.29	2
		8	7	22.30	22.23	22.27	2
		15	0	22.23	22.29	22.17	2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 607	18 900	19 193	
				1 850.7 MHz	1 880.0 MHz	1 909.3 MHz	
1.4 MHz	QPSK	1	0	23.85	23.93	23.53	0
		1	3	24.01	23.86	23.50	0
		1	5	24.03	23.94	23.58	0
		3	0	23.86	24.00	23.92	0
		3	1	23.90	24.00	23.93	0
		3	3	23.86	24.00	23.92	0
		6	0	23.19	23.29	23.26	1
	16QAM	1	0	22.78	23.18	23.04	1
		1	3	22.78	23.17	23.02	1
		1	5	22.76	23.18	23.11	1
		3	0	23.24	23.14	23.50	1
		3	1	23.26	23.18	23.52	1
		3	3	23.30	23.03	23.51	1
		6	0	22.35	22.32	22.32	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (37) of (323)

**9.5.2 LTE Band 4**

Band width	Modulation	RB Size	RB offset	Maximum Average Power		MPR
				20 175		
				1 732.5 MHz		
20 MHz	QPSK	1	0	24.05		0
		1	49	24.25		0
		1	99	24.17		0
		50	0	23.64		1
		50	24	23.67		1
		50	50	23.65		1
		100	0	23.64		1
	16QAM	1	0	23.64		1
		1	49	23.73		1
		1	99	23.67		1
		50	0	22.52		2
		50	24	22.58		2
		50	50	22.53		2
		100	0	22.60		2

20 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				20 025	20 175	20 325	
				1 717.5 MHz	1 732.5 MHz	1 747.5 MHz	
15 MHz	QPSK	1	0	23.71	23.90	24.10	0
		1	36	23.78	24.09	24.04	0
		1	74	23.87	23.97	24.12	0
		36	0	23.23	23.40	23.52	1
		36	18	23.26	23.46	23.54	1
		36	37	23.26	23.41	23.51	1
		75	0	23.24	23.49	23.53	1
	16QAM	1	0	23.14	23.25	23.44	1
		1	36	23.22	23.26	23.55	1
		1	74	23.24	23.32	23.46	1
		36	0	22.14	22.42	22.40	2
		36	18	22.16	22.43	22.45	2
		36	37	22.20	22.44	22.43	2
		75	0	22.22	22.41	22.38	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (38) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				20 000	20 175	20 350	
				1 715.0 MHz	1 732.5 MHz	1 750.0 MHz	
10 MHz	QPSK	1	0	23.24	23.58	23.59	0
		1	25	23.27	23.59	23.64	0
		1	49	23.26	23.54	23.60	0
		25	0	23.21	23.49	23.45	1
		25	12	23.19	23.47	23.46	1
		25	25	23.20	23.47	23.44	1
		50	0	23.17	23.45	23.45	1
	16QAM	1	0	23.11	23.42	23.45	1
		1	25	23.06	23.46	23.46	1
		1	49	23.10	23.32	23.43	1
		25	0	22.07	22.40	22.43	2
		25	12	22.16	22.43	22.53	2
		25	25	22.15	22.45	22.55	2
		50	0	22.19	22.40	22.46	2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				19 975	20 175	20 375	
				1 712.5 MHz	1 732.5 MHz	1 752.5 MHz	
5 MHz	QPSK	1	0	23.30	23.58	24.07	0
		1	12	23.40	23.57	23.90	0
		1	24	23.37	23.50	24.01	0
		12	0	23.11	23.50	23.53	1
		12	7	23.15	23.51	23.54	1
		12	13	23.22	23.48	23.52	1
		25	0	23.15	23.49	23.54	1
	16QAM	1	0	22.80	23.49	23.65	1
		1	12	23.19	23.39	23.72	1
		1	24	23.06	23.41	23.46	1
		12	0	22.04	22.32	22.46	2
		12	7	22.05	22.34	22.46	2
		12	13	22.01	22.34	22.44	2
		25	0	22.13	22.35	22.50	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (39) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				19 965	20 175	20 385	
				1 711.5 MHz	1 732.5 MHz	1 753.5 MHz	
3 MHz	QPSK	1	0	24.04	23.86	23.66	0
		1	8	23.58	23.89	23.73	0
		1	14	23.42	23.87	23.68	0
		8	0	23.16	23.52	23.55	1
		8	4	23.14	23.48	23.56	1
		8	7	23.11	23.49	23.54	1
		15	0	23.13	23.44	23.56	1
	16QAM	1	0	23.14	23.38	23.59	1
		1	8	23.17	23.67	23.74	1
		1	14	23.04	23.39	23.48	1
		8	0	22.28	22.34	22.39	2
		8	4	22.30	22.37	22.42	2
		8	7	22.24	22.37	22.43	2
		15	0	22.10	22.28	22.45	2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				19 957	20 175	20 393	
				1 710.7 MHz	1 732.5 MHz	1 754.3 MHz	
1.4 MHz	QPSK	1	0	23.17	23.58	23.73	0
		1	3	23.16	23.65	23.73	0
		1	5	23.12	23.63	23.69	0
		3	0	24.09	24.10	24.15	0
		3	1	24.16	24.17	24.14	0
		3	3	24.13	24.11	24.15	0
		6	0	23.15	23.48	23.60	1
	16QAM	1	0	23.06	23.49	23.59	1
		1	3	23.31	23.34	23.37	1
		1	5	23.08	23.03	23.64	1
		3	0	23.13	23.35	23.63	1
		3	1	23.15	23.42	23.67	1
		3	3	23.17	23.35	23.61	1
		6	0	22.12	22.44	22.55	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (40) of (323)

**9.5.3 LTE Band 5**

Band width	Modulation	RB Size	RB offset	Maximum Average Power		MPR
				20 525		
				836.5 MHz		
10 MHz	QPSK	1	0	24.56		0
		1	25	24.60		0
		1	49	24.55		0
		25	0	23.85		1
		25	12	23.95		1
		25	25	23.82		1
		50	0	23.94		1
	16QAM	1	0	23.89		1
		1	25	23.73		1
		1	49	23.85		1
		25	0	22.93		2
		25	12	22.86		2
		25	25	22.76		2
		50	0	22.94		2

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				20 425	20 525	20 625	
				826.5 MHz	836.5 MHz	846.5 MHz	
5 MHz	QPSK	1	0	24.37	24.39	24.43	0
		1	12	24.60	24.45	24.38	0
		1	24	24.57	24.37	24.29	0
		12	0	23.77	23.64	23.61	1
		12	7	23.77	23.59	23.60	1
		12	13	23.76	23.61	23.59	1
		25	0	23.82	23.68	23.66	1
	16QAM	1	0	23.52	23.62	23.59	1
		1	12	24.05	23.63	23.62	1
		1	24	24.00	23.63	23.55	1
		12	0	22.67	22.59	22.66	2
		12	7	22.70	22.60	22.62	2
		12	13	22.67	22.58	22.60	2
		25	0	22.80	22.66	22.69	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (41) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				20 415	20 525	20 635	
				825.5 MHz	836.5 MHz	847.5 MHz	
3 MHz	QPSK	1	0	24.42	24.42	24.35	0
		1	8	24.42	24.40	24.44	0
		1	14	24.38	24.51	24.54	0
		8	0	23.83	23.63	23.56	1
		8	4	23.75	23.62	23.59	1
		8	7	23.78	23.67	23.52	1
		15	0	23.87	23.70	23.64	1
	16QAM	1	0	23.60	23.63	23.56	1
		1	8	23.71	23.67	23.41	1
		1	14	23.88	23.92	23.32	1
		8	0	22.76	22.53	22.54	2
		8	4	22.74	22.51	22.50	2
		8	7	22.75	22.53	22.49	2
		15	0	22.80	22.67	22.53	2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				20 407	20 525	20 643	
				824.7 MHz	836.5 MHz	848.3 MHz	
1.4 MHz	QPSK	1	0	24.31	24.42	24.21	0
		1	3	24.40	24.52	24.53	0
		1	5	24.34	24.58	24.27	0
		3	0	24.58	24.57	24.60	0
		3	1	24.54	24.57	24.60	0
		3	3	24.52	24.58	24.59	0
		6	0	23.51	23.67	23.61	1
	16QAM	1	0	23.36	23.40	23.47	1
		1	3	23.51	23.34	23.69	1
		1	5	23.36	23.54	23.38	1
		3	0	23.63	23.52	23.54	1
		3	1	23.62	23.53	23.54	1
		3	3	23.61	23.61	23.50	1
		6	0	22.73	22.69	22.66	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (42) of (323)

**9.5.4 LTE Band 12**

Band width	Modulation	RB Size	RB offset	Maximum Average Power		MPR
				23 095		
				707.5 MHz		
10 MHz	QPSK	1	0	24.73		0
		1	25	24.90		0
		1	49	24.64		0
		25	0	23.91		1
		25	12	23.80		1
		25	25	23.95		1
		50	0	23.90		1
	16QAM	1	0	23.98		1
		1	25	23.93		1
		1	49	23.91		1
		25	0	22.88		2
		25	12	22.86		2
		25	25	22.85		2
		50	0	22.83		2

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				23 035	23 095	23 155	
				701.5 MHz	707.5 MHz	713.5 MHz	
5 MHz	QPSK	1	0	24.83	24.55	24.84	0
		1	12	24.86	24.60	24.70	0
		1	24	24.84	24.48	24.75	0
		12	0	23.99	23.86	23.84	1
		12	7	23.96	23.82	23.89	1
		12	13	23.92	23.81	23.88	1
		25	0	23.91	23.77	23.87	1
	16QAM	1	0	23.93	24.02	23.87	1
		1	12	23.67	23.99	23.82	1
		1	24	23.89	23.93	24.14	1
		12	0	22.82	22.72	22.83	2
		12	7	22.82	22.69	22.88	2
		12	13	22.79	22.67	22.86	2
		25	0	22.98	22.76	22.86	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (43) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				23 025	23 095	23 655	
				700.5 MHz	707.5 MHz	714.5 MHz	
3 MHz	QPSK	1	0	24.73	24.61	24.79	0
		1	8	24.71	24.61	24.63	0
		1	14	24.66	24.63	24.84	0
		8	0	23.96	23.85	23.84	1
		8	4	23.96	23.80	23.80	1
		8	7	23.92	23.82	23.85	1
		15	0	23.89	23.76	23.73	1
	16QAM	1	0	23.70	23.97	23.47	1
		1	8	23.72	24.14	23.99	1
		1	14	23.60	24.08	24.03	1
		8	0	22.84	22.78	22.70	2
		8	4	22.92	22.76	22.71	2
		8	7	22.95	22.64	22.67	2
		15	0	22.92	22.79	22.73	2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				23 017	23 095	23 173	
				699.7 MHz	707.5 MHz	715.3 MHz	
1.4 MHz	QPSK	1	0	24.81	24.64	24.57	0
		1	3	24.70	24.79	24.52	0
		1	5	24.84	24.56	24.53	0
		3	0	24.86	24.83	24.83	0
		3	1	24.83	24.87	24.86	0
		3	3	24.85	24.90	24.90	0
		6	0	23.88	23.74	23.74	1
	16QAM	1	0	23.46	23.29	23.69	1
		1	3	24.05	23.29	23.72	1
		1	5	23.75	23.84	23.90	1
		3	0	24.00	23.79	23.88	1
		3	1	23.99	23.80	23.87	1
		3	3	23.86	23.67	23.94	1
		6	0	22.99	22.82	22.77	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (44) of (323)

**9.5.5 LTE Band 13**

Band width	Modulation	RB Size	RB offset	Maximum Average Power		MPR
				23 230		
				782.0 MHz		
10 MHz	QPSK	1	0	24.52		0
		1	25	24.44		0
		1	49	24.35		0
		25	0	23.72		1
		25	12	23.65		1
		25	25	23.63		1
		50	0	23.65		1
	16QAM	1	0	23.79		1
		1	25	23.68		1
		1	49	23.69		1
		25	0	22.67		2
		25	12	22.65		2
		25	25	22.58		2
		50	0	22.76		2

Band width	Modulation	RB Size	RB offset	Maximum Average Power		MPR
				23 230		
				782.0 MHz		
5 MHz	QPSK	1	0	24.32		0
		1	12	24.28		0
		1	24	24.21		0
		12	0	23.68		1
		12	7	23.68		1
		12	13	23.63		1
		25	0	23.68		1
	16QAM	1	0	23.77		1
		1	12	23.77		1
		1	24	23.70		1
		12	0	22.62		2
		12	7	22.55		2
		12	13	22.60		2
		25	0	22.64		2

5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

9.5.6 LTE Band 17

Band width	Modulation	RB Size	RB offset	Maximum Average Power		MPR
				23 790		
				710.0 MHz		
10 MHz	QPSK	1	0	24.64		0
		1	25	24.71		0
		1	49	24.67		0
		25	0	23.97		1
		25	12	24.00		1
		25	25	23.94		1
	16QAM	50	0	23.93		1
		1	0	23.87		1
		1	25	23.78		1
		1	49	23.73		1
		25	0	23.08		2
		25	12	23.09		2
		25	25	23.11		2
		50	0	23.09		2

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

Band width	Modulation	RB Size	RB offset	Maximum Average Power		MPR
				23 790		
				710.0 MHz		
5 MHz	QPSK	1	0	24.34		0
		1	12	24.41		0
		1	24	24.33		0
		12	0	23.63		1
		12	7	23.60		1
		12	13	23.61		1
		25	0	23.59		1
	16QAM	1	0	23.86		1
		1	12	23.91		1
		1	24	24.09		1
		12	0	22.60		2
		12	7	22.60		2
		12	13	22.61		2
		25	0	22.72		2

5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (46) of (323)

**9.5.7 LTE Band 26**

Band width	Modulation	RB Size	RB offset	Maximum Average Power		MPR
				26 865		
				831.5 MHz		
15 MHz	QPSK	1	0	24.56		0
		1	36	24.49		0
		1	74	24.47		0
		36	0	23.90		1
		36	18	23.84		1
		36	37	23.84		1
		75	0	23.88		1
	16QAM	1	0	23.90		1
		1	36	23.88		1
		1	74	23.84		1
		36	0	22.91		2
		36	18	22.90		2
		36	37	22.84		2
		75	0	22.91		2

15 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				26 740	26 865	26 990	
				819.0 MHz	831.5 MHz	844.0 MHz	
10 MHz	QPSK	1	0	24.33	24.33	24.28	0
		1	25	24.31	24.31	24.27	0
		1	49	24.17	24.22	24.14	0
		25	0	23.62	23.58	23.57	1
		25	12	23.57	23.59	23.55	1
		25	25	23.54	23.59	23.53	1
		50	0	23.65	23.64	23.54	1
	16QAM	1	0	23.53	23.71	23.54	1
		1	25	23.49	23.52	23.62	1
		1	49	23.40	23.53	23.44	1
		25	0	22.61	22.59	22.61	2
		25	12	22.50	22.60	22.62	2
		25	25	22.47	22.62	22.54	2
		50	0	22.67	22.63	22.70	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (47) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				26 715	26 865	27 015	
				816.5 MHz	831.5 MHz	846.5 MHz	
5 MHz	QPSK	1	0	24.36	24.28	24.16	0
		1	12	24.35	24.27	24.22	0
		1	24	24.26	24.23	24.14	0
		12	0	23.64	23.62	23.51	1
		12	7	23.62	23.64	23.43	1
		12	13	23.59	23.58	23.45	1
		25	0	23.64	23.65	23.50	1
	16QAM	1	0	23.60	23.67	23.93	1
		1	12	23.31	23.80	23.67	1
		1	24	23.63	23.77	23.29	1
		12	0	22.53	22.52	22.51	2
		12	7	22.55	22.54	22.51	2
		12	13	22.49	22.50	22.49	2
		25	0	22.60	22.62	22.51	2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				26 705	26 865	27 025	
				815.5 MHz	831.5 MHz	847.5 MHz	
3 MHz	QPSK	1	0	24.21	24.34	24.30	0
		1	8	24.18	24.29	24.51	0
		1	14	24.14	24.27	24.26	0
		8	0	23.63	23.63	23.51	1
		8	4	23.60	23.61	23.46	1
		8	7	23.55	23.61	23.47	1
		15	0	23.66	23.67	23.52	1
	16QAM	1	0	23.49	23.60	23.64	1
		1	8	23.39	23.47	23.61	1
		1	14	23.35	23.86	23.39	1
		8	0	22.60	22.61	22.41	2
		8	4	22.62	22.51	22.35	2
		8	7	22.64	22.54	22.35	2
		15	0	22.61	22.66	22.45	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (48) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				26 697	26 865	27 033	
				814.7 MHz	831.5 MHz	848.3 MHz	
1.4 MHz	QPSK	1	0	24.33	24.36	24.55	0
		1	3	24.25	24.24	24.24	0
		1	5	24.30	24.32	24.26	0
		3	0	24.46	24.46	24.50	0
		3	1	24.49	24.42	24.54	0
		3	3	24.43	24.41	24.54	0
		6	0	23.61	23.66	23.50	1
	16QAM	1	0	23.60	23.41	23.55	1
		1	3	23.32	23.29	23.53	1
		1	5	23.29	23.56	23.42	1
		3	0	23.61	23.45	23.38	1
		3	1	23.58	23.39	23.56	1
		3	3	23.58	23.45	23.58	1
		6	0	22.57	22.59	22.48	2



KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (49) of (323)

**9.5.8 LTE Band 41**

Band width	Modulation	RB Size	RB offset	Maximum Average Power					MPR
				39 750	40 185	40 620	41 055	41 490	
				2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
20 MHz	QPSK	1	0	23.87	23.41	23.66	23.73	23.80	0
		1	49	23.92	23.58	23.69	23.77	23.96	0
		1	99	23.87	23.37	23.58	23.70	23.80	0
		50	0	22.96	22.59	22.78	22.93	23.17	1
		50	24	22.94	22.58	22.72	22.88	23.14	1
		50	50	22.92	22.55	22.71	22.86	23.09	1
		100	0	22.95	22.55	22.76	22.90	23.11	1
	16QAM	1	0	22.98	22.69	22.79	23.12	23.35	1
		1	49	23.07	22.66	22.87	23.03	23.30	1
		1	99	23.10	22.57	22.78	22.98	23.26	1
		50	0	21.98	21.55	21.81	21.96	22.15	2
		50	24	21.99	21.55	21.86	21.94	22.09	2
		50	50	21.99	21.53	21.79	21.89	22.05	2
		100	0	21.99	21.59	21.82	21.91	22.16	2

Band width	Modulation	RB Size	RB offset	Maximum Average Power					MPR
				39 750	40 185	40 620	41 055	41 490	
				2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
15 MHz	QPSK	1	0	23.68	23.18	23.46	23.60	23.85	0
		1	36	23.66	23.18	23.43	23.61	23.82	0
		1	74	23.64	23.13	23.40	23.53	23.67	0
		36	0	22.97	22.58	22.81	22.94	23.18	1
		36	18	22.99	22.57	22.68	22.93	23.14	1
		36	37	23.00	22.55	22.69	22.90	23.10	1
		75	0	22.96	22.57	22.74	22.89	23.14	1
	16QAM	1	0	22.92	22.56	22.53	22.82	23.07	1
		1	36	22.93	22.59	22.56	22.91	23.13	1
		1	74	22.87	22.53	22.45	22.81	23.07	1
		36	0	21.97	21.69	21.80	21.92	22.22	2
		36	18	22.00	21.67	21.79	21.97	22.18	2
		36	37	21.97	21.61	21.75	21.88	22.16	2
		75	0	21.99	21.58	21.79	21.93	22.16	2

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (50) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power					MPR
				39 750	40 185	40 620	41 055	41 490	
				2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
10 MHz	QPSK	1	0	23.60	23.23	23.42	23.48	23.67	0
		1	25	23.61	23.20	23.45	23.50	23.77	0
		1	49	23.63	23.14	23.40	23.41	23.65	0
		25	0	23.01	22.60	22.78	22.91	23.14	1
		25	12	22.98	22.57	22.74	22.86	23.13	1
		25	25	23.02	22.59	22.73	22.87	23.13	1
		50	0	22.96	22.54	22.73	22.86	23.13	1
	16QAM	1	0	22.96	22.38	22.79	22.84	23.05	1
		1	25	22.88	22.36	22.78	22.83	23.02	1
		1	49	22.91	22.39	22.73	22.77	22.98	1
		25	0	22.00	21.57	21.80	21.87	22.16	2
		25	12	21.99	21.63	21.81	21.83	22.12	2
		25	25	21.99	21.59	21.75	21.85	22.18	2
		50	0	22.00	21.53	21.75	21.84	22.11	2

Band width	Modulation	RB Size	RB offset	Maximum Average Power					MPR
				39 750	40 185	40 620	41 055	41 490	
				2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
5 MHz	QPSK	1	0	23.61	23.20	23.42	23.52	23.66	0
		1	12	23.61	23.18	23.43	23.52	23.73	0
		1	24	23.59	23.22	23.36	23.49	23.59	0
		12	0	22.98	22.59	22.75	22.89	23.12	1
		12	7	23.00	22.59	22.71	22.88	23.14	1
		12	13	22.99	22.55	22.74	22.85	23.13	1
		25	0	23.01	22.53	22.72	22.84	23.18	1
	16QAM	1	0	23.02	22.58	22.79	22.99	23.03	1
		1	12	22.98	22.55	22.75	22.96	23.15	1
		1	24	22.99	22.64	22.74	22.95	23.08	1
		12	0	22.07	21.60	21.79	21.96	22.12	2
		12	7	22.08	21.56	21.81	21.88	22.12	2
		12	13	22.08	21.56	21.78	21.91	22.11	2
		25	0	22.02	21.59	21.79	21.84	22.14	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (51) of (323)

**9.5.9 LTE Band 66**

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				132 072	132 322	132 572	
				1 720.0 MHz	1 745.0 MHz	1 770.0 MHz	
20 MHz	QPSK	1	0	23.85	24.05	24.09	0
		1	49	23.70	24.01	24.07	0
		1	99	23.68	24.01	24.06	0
		50	0	23.41	23.67	23.76	1
		50	24	23.31	23.59	23.65	1
		50	50	23.27	23.58	23.71	1
		100	0	23.26	23.56	23.70	1
	16QAM	1	0	23.28	23.72	23.71	1
		1	49	23.33	23.75	23.70	1
		1	99	23.33	23.71	23.75	1
		50	0	22.11	22.41	22.55	2
		50	24	22.15	22.39	22.58	2
		50	50	22.16	22.43	22.57	2
		100	0	22.17	22.48	22.58	2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				132 047	132 322	132 597	
				1 717.5 MHz	1 745.0 MHz	1 772.5 MHz	
15 MHz	QPSK	1	0	23.71	23.81	24.29	0
		1	36	23.79	23.79	24.26	0
		1	74	23.85	23.95	24.25	0
		36	0	23.26	23.54	23.69	1
		36	18	23.29	23.51	23.68	1
		36	37	23.28	23.54	23.69	1
		75	0	23.26	23.59	23.74	1
	16QAM	1	0	23.05	23.48	23.69	1
		1	36	23.13	23.56	23.66	1
		1	74	23.16	23.59	23.67	1
		36	0	22.13	22.45	22.59	2
		36	18	22.11	22.47	22.58	2
		36	37	22.15	22.46	22.57	2
		75	0	22.14	22.45	22.59	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (52) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				132 022	132 322	132 622	
				1 715.0 MHz	1 745.0 MHz	1 775.0 MHz	
10 MHz	QPSK	1	0	23.28	23.77	24.05	0
		1	25	23.34	23.77	24.06	0
		1	49	23.38	23.71	23.91	0
		25	0	23.16	23.58	23.68	1
		25	12	23.23	23.59	23.68	1
		25	25	23.24	23.63	23.65	1
		50	0	23.23	23.59	23.65	1
	16QAM	1	0	23.16	23.65	23.70	1
		1	25	23.20	23.68	23.63	1
		1	49	23.16	23.63	23.60	1
		25	0	22.09	22.46	22.58	2
		25	12	22.14	22.48	22.61	2
		25	25	22.11	22.40	22.60	2
		50	0	22.17	22.47	22.56	2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				131 997	132 322	132 647	
				1 712.5 MHz	1 745.0 MHz	1 777.5 MHz	
5 MHz	QPSK	1	0	23.58	23.66	24.03	0
		1	12	23.62	23.90	24.10	0
		1	24	23.53	23.88	23.93	0
		12	0	23.21	23.58	23.60	1
		12	7	23.21	23.60	23.61	1
		12	13	23.26	23.59	23.60	1
		25	0	23.20	23.57	23.68	1
	16QAM	1	0	22.99	23.55	23.33	1
		1	12	22.96	23.55	23.51	1
		1	24	22.95	23.67	23.81	1
		12	0	22.07	22.39	22.50	2
		12	7	22.02	22.40	22.52	2
		12	13	22.02	22.39	22.51	2
		25	0	22.09	22.38	22.62	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (53) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				131 987	132 322	132 657	
				1 711.5 MHz	1 745.0 MHz	1 778.5 MHz	
3 MHz	QPSK	1	0	23.65	23.86	24.11	0
		1	8	23.34	23.85	24.03	0
		1	14	23.32	23.85	23.97	0
		8	0	23.18	23.58	23.65	1
		8	4	23.20	23.60	23.66	1
		8	7	23.21	23.59	23.68	1
		15	0	23.21	23.55	23.68	1
	16QAM	1	0	23.11	23.64	23.71	1
		1	8	23.12	23.64	23.69	1
		1	14	22.88	23.59	23.62	1
		8	0	22.21	22.41	22.56	2
		8	4	22.09	22.43	22.49	2
		8	7	22.17	22.44	22.59	2
		15	0	22.01	22.37	22.51	2

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				131 979	132 322	132 665	
				1 710.7 MHz	1 745.0 MHz	1 779.3 MHz	
1.4 MHz	QPSK	1	0	23.09	23.74	23.99	0
		1	3	23.14	23.66	24.13	0
		1	5	23.13	23.65	23.99	0
		3	0	24.06	24.13	24.29	0
		3	1	24.08	24.14	24.20	0
		3	3	24.04	24.13	24.28	0
		6	0	23.09	23.62	23.72	1
	16QAM	1	0	22.57	23.50	23.62	1
		1	3	22.93	23.52	23.61	1
		1	5	22.87	23.20	23.59	1
		3	0	22.97	23.40	23.64	1
		3	1	23.03	23.51	23.51	1
		3	3	23.05	23.59	23.51	1
		6	0	21.99	22.47	22.65	2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (54) of (323)



9.6 LTE Average Conducted Output Power (Reduced Average Power)

9.6.1 LTE Band 2 (Grip Sensor, Earjack)

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 700	18 900	19 100	
				1 860.0 MHz	1 880.0 MHz	1 900.0 MHz	
20 MHz	QPSK	1	0	20.93	20.93	21.09	0
		1	49	20.94	21.23	21.15	0
		1	99	20.91	21.15	20.92	0
		50	0	21.31	21.40	21.26	0
		50	24	21.32	21.45	21.40	0
		50	50	21.29	21.41	21.30	0
		100	0	21.33	21.43	21.35	0
	16QAM	1	0	20.71	20.85	20.41	0
		1	49	20.80	20.81	20.38	0
		1	99	20.75	20.61	20.59	0
		50	0	21.23	21.20	21.18	0
		50	24	21.23	21.14	21.14	0
		50	50	21.14	21.15	21.24	0
		100	0	21.14	21.27	21.17	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 675	18 900	19 125	
				1 857.5 MHz	1 880.0 MHz	1 902.5 MHz	
15 MHz	QPSK	1	0	20.82	20.77	20.71	0
		1	36	20.89	20.75	20.03	0
		1	74	20.79	20.89	20.68	0
		36	0	21.05	21.18	21.09	0
		36	18	21.07	21.18	21.14	0
		36	37	21.12	21.16	21.18	0
		75	0	21.09	21.15	21.14	0
	16QAM	1	0	20.34	20.50	20.20	0
		1	36	20.30	20.53	20.31	0
		1	74	20.33	20.51	20.36	0
		36	0	21.20	21.27	21.22	0
		36	18	21.20	21.25	21.24	0
		36	37	21.17	21.28	21.28	0
		75	0	21.17	21.23	21.25	0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (55) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 650	18 900	19 150	
				1 855.0 MHz	1 880.0 MHz	1 905.0 MHz	
10 MHz	QPSK	1	0	20.92	20.53	20.82	0
		1	25	21.08	20.52	20.81	0
		1	49	21.12	20.47	20.93	0
		25	0	21.04	21.12	21.07	0
		25	12	21.01	21.10	21.06	0
		25	25	21.00	21.09	21.08	0
		50	0	20.98	21.07	21.05	0
	16QAM	1	0	20.29	20.76	20.12	0
		1	25	20.40	20.71	20.37	0
		1	49	20.38	20.73	20.29	0
		25	0	21.11	21.17	21.31	0
		25	12	21.11	21.16	21.31	0
		25	25	21.12	21.12	21.32	0
		50	0	21.11	21.24	21.15	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 625	18 900	19 175	
				1 852.5 MHz	1 880.0 MHz	1 907.5 MHz	
5 MHz	QPSK	1	0	21.33	20.56	21.00	0
		1	12	21.32	20.56	21.04	0
		1	24	20.46	20.52	21.08	0
		12	0	21.03	21.10	21.04	0
		12	7	21.00	21.11	21.10	0
		12	13	20.99	21.10	21.13	0
		25	0	20.97	21.13	21.07	0
	16QAM	1	0	21.10	20.70	20.87	0
		1	12	21.07	20.78	20.04	0
		1	24	20.24	20.71	21.28	0
		12	0	21.11	21.20	21.21	0
		12	7	21.09	21.14	21.14	0
		12	13	21.12	21.12	21.19	0
		25	0	21.10	21.21	21.29	0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (56) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 615	18 900	19 185	
				1 851.5 MHz	1 880.0 MHz	1 908.5 MHz	
3 MHz	QPSK	1	0	20.75	20.65	20.77	0
		1	8	20.71	20.70	20.88	0
		1	14	21.06	20.67	20.87	0
		8	0	21.03	21.16	21.12	0
		8	4	21.01	21.07	21.12	0
		8	7	21.04	21.14	21.16	0
		15	0	21.00	21.09	21.14	0
	16QAM	1	0	20.16	20.84	20.44	0
		1	8	20.62	20.87	20.72	0
		1	14	20.57	20.51	20.73	0
		8	0	21.26	21.23	21.10	0
		8	4	21.26	21.14	21.14	0
		8	7	21.10	21.29	21.13	0
		15	0	21.17	21.25	21.16	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				18 607	18 900	19 193	
				1 850.7 MHz	1 880.0 MHz	1 909.3 MHz	
1.4 MHz	QPSK	1	0	20.55	20.53	20.49	0
		1	3	20.57	20.56	20.51	0
		1	5	20.54	20.50	20.48	0
		3	0	21.13	21.15	21.15	0
		3	1	21.12	21.19	21.15	0
		3	3	21.11	21.13	21.19	0
		6	0	21.08	21.17	21.16	0
	16QAM	1	0	20.43	20.75	20.38	0
		1	3	20.47	20.74	20.34	0
		1	5	20.42	20.72	20.40	0
		3	0	21.00	21.20	21.29	0
		3	1	21.09	21.37	21.06	0
		3	3	21.11	21.21	21.26	0
		6	0	21.35	21.27	21.29	0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (57) of (323)

**9.6.2 LTE Band 4 (Grip Sensor, Earjack)**

Band width	Modulation	RB Size	RB offset	Maximum Average Power		MPR
				20 175		
				1 732.5 MHz		
20 MHz	QPSK	1	0	20.97		0
		1	49	20.94		0
		1	99	21.20		0
		50	0	21.63		0
		50	24	21.62		0
		50	50	21.70		0
		100	0	21.67		0
	16QAM	1	0	20.80		0
		1	49	20.69		0
		1	99	20.75		0
		50	0	21.40		0
		50	24	21.35		0
		50	50	21.36		0
		100	0	21.47		0

20 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				20 025	20 175	20 325	
				1 717.5 MHz	1 732.5 MHz	1 747.5 MHz	
15 MHz	QPSK	1	0	20.38	20.55	20.66	0
		1	36	20.43	20.57	20.62	0
		1	74	20.41	20.59	20.66	0
		36	0	21.20	21.46	21.52	0
		36	18	21.23	21.45	21.51	0
		36	37	21.25	21.48	21.49	0
		75	0	21.22	21.42	21.48	0
	16QAM	1	0	20.45	20.45	20.62	0
		1	36	20.37	20.53	20.63	0
		1	74	20.58	20.73	20.64	0
		36	0	21.24	21.44	21.48	0
		36	18	21.25	21.43	21.47	0
		36	37	21.24	21.45	21.45	0
		75	0	21.25	21.46	21.46	0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (58) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				20 000	20 175	20 350	
				1 715.0 MHz	1 732.5 MHz	1 750.0 MHz	
10 MHz	QPSK	1	0	20.53	20.66	20.63	0
		1	25	20.21	20.30	20.66	0
		1	49	20.24	20.88	20.93	0
		25	0	21.14	21.44	21.49	0
		25	12	21.21	21.46	21.50	0
		25	25	21.22	21.49	21.47	0
		50	0	21.19	21.41	21.47	0
	16QAM	1	0	20.45	20.60	20.77	0
		1	25	20.59	20.65	20.84	0
		1	49	20.47	20.61	20.31	0
		25	0	21.17	21.38	21.58	0
		25	12	21.21	21.37	21.60	0
		25	25	21.21	21.39	21.60	0
		50	0	21.22	21.46	21.47	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				19 975	20 175	20 375	
				1 712.5 MHz	1 732.5 MHz	1 752.5 MHz	
5 MHz	QPSK	1	0	20.22	20.54	20.57	0
		1	12	20.54	20.50	20.63	0
		1	24	20.14	20.76	20.64	0
		12	0	21.14	21.50	21.56	0
		12	7	21.14	21.50	21.53	0
		12	13	21.16	21.50	21.58	0
		25	0	21.13	21.47	21.51	0
	16QAM	1	0	20.42	21.43	20.48	0
		1	12	20.68	21.40	20.41	0
		1	24	20.31	20.48	20.53	0
		12	0	21.17	21.46	21.49	0
		12	7	21.21	21.45	21.52	0
		12	13	21.16	21.42	21.54	0
		25	0	21.14	21.49	21.57	0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (59) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				19 965	20 175	20 385	
				1 711.5 MHz	1 732.5 MHz	1 753.5 MHz	
3 MHz	QPSK	1	0	21.02	20.46	20.70	0
		1	8	20.37	21.17	20.76	0
		1	14	20.18	20.39	20.72	0
		8	0	21.10	21.43	21.50	0
		8	4	21.09	21.42	21.57	0
		8	7	21.12	21.44	21.54	0
		15	0	21.13	21.48	21.57	0
	16QAM	1	0	20.25	20.49	21.08	0
		1	8	20.24	20.66	21.00	0
		1	14	20.25	20.61	21.08	0
		8	0	21.16	21.49	21.50	0
		8	4	21.16	21.39	21.50	0
		8	7	21.12	21.37	21.49	0
		15	0	21.16	21.47	21.51	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				19 957	20 175	20 393	
				1 710.7 MHz	1 732.5 MHz	1 754.3 MHz	
1.4 MHz	QPSK	1	0	20.51	20.77	20.89	0
		1	3	20.50	20.72	20.87	0
		1	5	20.45	20.66	20.88	0
		3	0	21.14	21.51	21.57	0
		3	1	21.14	21.47	21.53	0
		3	3	21.10	21.49	21.53	0
		6	0	21.07	21.44	21.52	0
	16QAM	1	0	20.22	20.48	20.93	0
		1	3	20.34	20.51	20.77	0
		1	5	20.32	20.39	20.89	0
		3	0	21.00	21.48	21.65	0
		3	1	21.08	21.51	21.48	0
		3	3	21.06	21.29	21.61	0
		6	0	21.17	21.45	21.57	0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (60) of (323)

**9.6.3 LTE Band 66 (Grip Sensor, Earjack)**

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				132 072	132 322	132 572	
				1 720.0 MHz	1 745.0 MHz	1 770.0 MHz	
20 MHz	QPSK	1	0	20.50	20.95	21.03	0
		1	49	20.54	21.04	21.03	0
		1	99	20.63	21.05	21.06	0
		50	0	21.37	21.64	21.77	0
		50	24	21.34	21.61	21.73	0
		50	50	21.36	21.59	21.75	0
	16QAM	100	0	21.36	21.62	21.75	0
		1	0	20.67	20.90	20.79	0
		1	49	20.77	20.95	20.80	0
		1	99	20.62	21.00	20.86	0
		50	0	21.11	21.40	21.59	0
		50	24	21.14	21.38	21.58	0
		50	50	21.13	21.35	21.59	0
		100	0	21.16	21.50	21.61	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				132 047	132 322	132 597	
				1 717.5 MHz	1 745.0 MHz	1 772.5 MHz	
15 MHz	QPSK	1	0	20.55	20.66	20.84	0
		1	36	20.41	20.66	20.89	0
		1	74	20.65	20.68	20.92	0
		36	0	21.07	21.43	21.58	0
		36	18	21.13	21.42	21.59	0
		36	37	21.15	21.42	21.59	0
		75	0	21.12	21.44	21.56	0
	16QAM	1	0	20.44	20.62	20.59	0
		1	36	20.34	20.70	20.73	0
		1	74	20.30	20.58	20.63	0
		36	0	21.19	21.43	21.57	0
		36	18	21.14	21.42	21.54	0
		36	37	21.15	21.42	21.55	0
		75	0	21.16	21.43	21.55	0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (61) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				132 022	132 322	132 622	
				1 715.0 MHz	1 745.0 MHz	1 775.0 MHz	
10 MHz	QPSK	1	0	20.52	20.86	20.64	0
		1	25	20.73	20.52	20.96	0
		1	49	20.24	20.51	21.21	0
		25	0	21.12	21.42	21.50	0
		25	12	21.13	21.45	21.50	0
		25	25	21.16	21.47	21.48	0
		50	0	21.16	21.44	21.54	0
	16QAM	1	0	20.46	20.07	21.09	0
		1	25	20.47	20.09	20.64	0
		1	49	20.42	20.72	20.59	0
		25	0	21.06	21.37	21.59	0
		25	12	21.11	21.35	21.64	0
		25	25	21.10	21.35	21.59	0
		50	0	21.12	21.37	21.50	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				131 997	132 322	132 647	
				1 712.5 MHz	1 745.0 MHz	1 777.5 MHz	
5 MHz	QPSK	1	0	20.96	21.35	20.71	0
		1	12	20.18	20.42	20.71	0
		1	24	20.18	21.31	21.43	0
		12	0	21.09	21.44	21.54	0
		12	7	21.09	21.44	21.55	0
		12	13	21.15	21.45	21.51	0
		25	0	21.09	21.53	21.52	0
	16QAM	1	0	20.90	20.46	20.85	0
		1	12	20.93	20.52	20.88	0
		1	24	20.13	20.52	21.12	0
		12	0	21.11	21.43	21.54	0
		12	7	21.11	21.44	21.56	0
		12	13	21.09	21.42	21.58	0
		25	0	21.13	21.39	21.57	0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (62) of (323)



Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				131 987	132 322	132 657	
				1 711.5 MHz	1 745.0 MHz	1 778.5 MHz	
3 MHz	QPSK	1	0	20.40	20.54	20.85	0
		1	8	20.49	20.72	20.90	0
		1	14	20.43	20.88	20.84	0
		8	0	21.06	21.44	21.53	0
		8	4	21.08	21.45	21.57	0
		8	7	21.08	21.48	21.52	0
		15	0	21.11	21.44	21.56	0
	16QAM	1	0	20.21	20.82	21.21	0
		1	8	20.22	20.84	20.97	0
		1	14	20.13	20.83	21.20	0
		8	0	21.13	21.39	21.67	0
		8	4	21.10	21.39	21.46	0
		8	7	21.04	21.40	21.45	0
		15	0	21.19	21.45	21.57	0

Band width	Modulation	RB Size	RB offset	Maximum Average Power			MPR
				131 979	132 322	132 665	
				1 710.7 MHz	1 745.0 MHz	1 779.3 MHz	
1.4 MHz	QPSK	1	0	20.38	20.68	20.80	0
		1	3	20.37	20.69	20.84	0
		1	5	20.39	20.70	20.77	0
		3	0	21.01	21.42	21.50	0
		3	1	21.05	21.42	21.53	0
		3	3	21.02	21.45	21.55	0
		6	0	21.10	21.45	21.57	0
	16QAM	1	0	20.10	20.54	20.85	0
		1	3	20.00	20.64	20.84	0
		1	5	20.09	20.61	20.79	0
		3	0	20.88	21.28	21.33	0
		3	1	20.91	21.44	21.36	0
		3	3	20.93	21.27	21.51	0
		6	0	21.09	21.59	21.49	0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (63) of (323)



9.7 WLAN Average Conducted Output Power(Maximum Average Power)

Band	Freq. [MHz]	Channel	Mode		
			802.11b	802.11g	802.11n
WLAN 2.4 GHz	2 412.0	1	17.92	16.14	15.67
	2 437.0	6	17.98	16.22	15.60
	2 462.0	11	17.88	16.18	15.52

Band	Freq. [MHz]	Channel	Mode		
			802.11a	802.11n	802.11ac
WLAN 5 GHz (20 MHz)	5 180.0	36	14.15	15.50	15.38
	5 200.0	40	15.43	15.78	15.94
	5 220.0	44	15.90	15.86	15.80
	5 240.0	48	15.91	16.32	16.18
	5 260.0	52	16.05	16.27	16.23
	5 280.0	56	15.24	15.50	15.53
	5 300.0	60	15.86	15.86	15.78
	5 320.0	64	15.55	15.82	15.86
	5 500.0	100	15.25	15.46	15.47
	5 600.0	120	16.29	15.21	15.20
	5 620.0	124	16.49	16.30	15.60
	5 720.0	144	16.52	16.00	16.19
	5 745.0	149	15.79	15.43	15.91
	5 785.0	157	15.49	15.87	15.59
5 825.0	165	15.72	15.77	15.62	

Band	Freq. [MHz]	Channel	Mode	
			802.11n	802.11ac
WLAN 5 GHz (40 MHz)	5 190.0	38	14.04	14.23
	5 230.0	46	14.15	14.07
	5 270.0	54	13.58	13.49
	5 310.0	62	13.74	13.59
	5 510.0	102	14.19	14.01
	5 590.0	118	14.56	14.14
	5 630.0	126	14.06	13.96
	5 710.0	142	14.09	13.78
	5 755.0	151	13.68	13.76
5 795.0	159	13.71	13.66	


Band	Freq. [MHz]	Channel	Mode
			802.11ac
WLAN 5 GHz (80 MHz)	5 210.0	42	12.64
	5 290.0	58	13.74
	5 530.0	106	13.22
	5 610.0	122	13.19
	5 690.0	138	12.82
	5 775.0	155	13.12

This test report shall not be reproduced, except in full, without the written approval

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.

Power Measurement Setup

**KCTL**

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (65) of (323)



9.8 WLAN Average Conducted Output Power (Reduced Average Power)

Band	Freq. [MHz]	Channel	Mode		
			802.11b	802.11g	802.11n
WLAN 2.4 GHz	2 412.0	1	14.29	13.25	12.73
	2 437.0	6	13.99	13.54	12.91
	2 462.0	11	14.42	13.35	12.75

Band	Freq. [MHz]	Channel	Mode		
			802.11a	802.11n	802.11ac
WLAN 5 GHz (20 MHz)	5 180.0	36	12.71	12.66	12.63
	5 200.0	40	12.39	12.29	12.49
	5 220.0	44	13.16	13.02	12.76
	5 240.0	48	12.78	12.73	12.91
	5 260.0	52	12.64	13.38	13.27
	5 280.0	56	12.58	12.74	12.81
	5 300.0	60	13.75	13.57	13.63
	5 320.0	64	13.25	13.25	13.30
	5 500.0	100	12.92	12.67	12.66
	5 600.0	120	12.56	12.53	12.59
	5 620.0	124	13.27	13.11	13.10
	5 720.0	144	12.71	12.72	12.83
	5 745.0	149	12.47	13.25	13.42
	5 785.0	157	12.38	13.16	13.00
5 825.0	165	12.41	13.03	13.46	

Band	Freq. [MHz]	Channel	Mode	
			802.11n	802.11ac
WLAN 5 GHz (40 MHz)	5 190.0	38	13.18	12.73
	5 230.0	46	12.64	12.64
	5 270.0	54	12.40	12.45
	5 310.0	62	12.34	12.38
	5 510.0	102	12.78	12.99
	5 590.0	118	12.83	12.38
	5 630.0	126	12.85	12.78
	5 710.0	142	12.41	12.78
	5 755.0	151	12.44	12.67
5 795.0	159	12.51	12.48	

Band	Freq. [MHz]	Channel	Mode
			802.11ac
WLAN 5 GHz (80 MHz)	5 210.0	42	12.64
	5 290.0	58	13.74
	5 530.0	106	13.22
	5 610.0	122	13.19
	5 690.0	138	12.82
	5 775.0	155	13.12

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (66) of (323)




9.9 Bluetooth Average Conducted Output Power

Mode	Freq. [MHz]	Channel	Conducted Powers
			(dBm)
BDR_DH1 (1 Mbps)	2 402.0	0	10.31
	2 441.0	39	10.17
	2 480.0	78	8.63
EDR_2-DH1 (2 Mbps)	2 402.0	0	8.40
	2 441.0	39	8.31
	2 480.0	78	6.81
EDR_3-DH1 (3 Mbps)	2 402.0	0	8.39
	2 441.0	39	8.30
	2 480.0	78	6.87
LE (1 Mbps)	2 402.0	0	6.61
	2 440.0	19	7.02
	2 480.0	39	5.90
LE (2 Mbps)	2 402.0	0	6.78
	2 440.0	19	7.19
	2 480.0	39	6.05


9.10 Bluetooth Duty Factor

Mode	Packet	On Time (ms)	On-Off Time (ms)	Duty Cycle (%)	Duty Cycle Compensate Factor
BDR(GFSK)	DH1	0.366	1.257	0.291	3.436

9.11 Bluetooth Power Measurement Setup

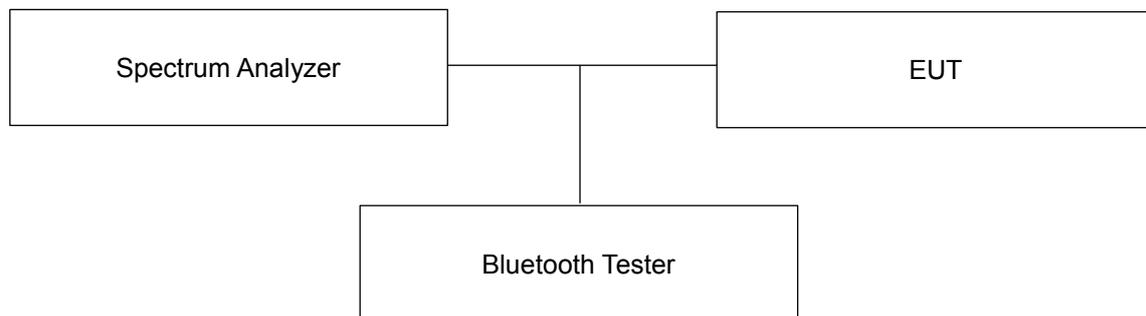

9.12 Bluetooth Duty Plot

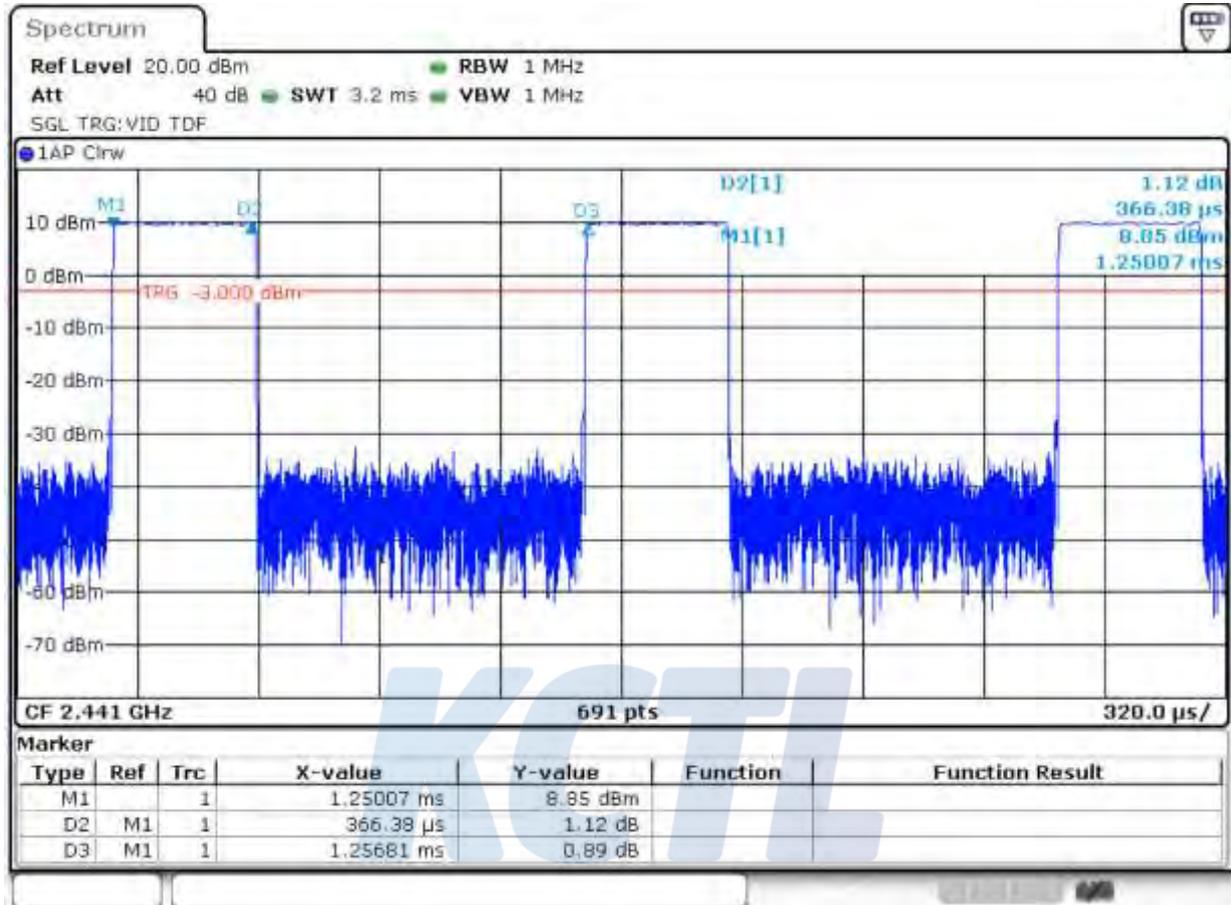

10. System Verification

10.1 Tissue Verification


The dielectric properties for this Tissue Simulant Liquids were measured by using the SPEAG Model DAK3.5 Dielectric Probe in conjunction with Agilent E5071B Network Analyzer (300 kHz – 8 500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 1. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Liquids was $(22 \pm 2) ^\circ\text{C}$.

Freq. (MHz)	Limit/Measured		Permittivity (ρ)	Conductivity (σ)	Temp. ($^\circ\text{C}$)
750.0	Recommended Limit		41.90 \pm 5 % (39.81 ~ 44.00)	0.89 \pm 5 % (0.85 ~ 0.93)	22 \pm 2
	Measured	2020-01-13	43.56	0.87	21.75
750.0	Recommended Limit		41.90 \pm 5 % (39.81 ~ 44.00)	0.89 \pm 5 % (0.85 ~ 0.93)	22 \pm 2
	Measured	2020-01-14	41.61	0.90	21.34
850.0	Recommended Limit		41.50 \pm 5 % (39.43 ~ 43.58)	0.92 \pm 5 % (0.87 ~ 0.96)	22 \pm 2
	Measured	2020-01-13	41.13	0.93	20.77
850.0	Recommended Limit		41.50 \pm 5 % (39.43 ~ 43.58)	0.92 \pm 5 % (0.87 ~ 0.96)	22 \pm 2
	Measured	2020-01-14	41.52	0.93	20.59
1 750.0	Recommended Limit		40.07 \pm 5 % (38.07 ~ 42.08)	1.37 \pm 5 % (1.30 ~ 1.44)	22 \pm 2
	Measured	2020-01-08	39.82	1.42	20.52
1 750.0	Recommended Limit		40.07 \pm 5 % (38.07 ~ 42.08)	1.37 \pm 5 % (1.30 ~ 1.44)	22 \pm 2
	Measured	2020-01-09	39.07	1.41	20.33
1 900.0	Recommended Limit		40.00 \pm 5 % (38.00 ~ 42.00)	1.40 \pm 5 % (1.33 ~ 1.47)	22 \pm 2
	Measured	2020-01-06	39.58	1.41	20.58
1 900.0	Recommended Limit		40.00 \pm 5 % (38.00 ~ 42.00)	1.40 \pm 5 % (1.33 ~ 1.47)	22 \pm 2
	Measured	2020-01-07	39.59	1.40	20.76
2 450.0	Recommended Limit		39.20 \pm 5 % (37.24 ~ 41.16)	1.80 \pm 5 % (1.71 ~ 1.89)	22 \pm 2
	Measured	2020-01-22	38.67	1.80	21.14
2 600.0	Recommended Limit		39.00 \pm 5 % (37.05 ~ 40.95)	1.96 \pm 5 % (1.86 ~ 2.06)	22 \pm 2
	Measured	2020-01-09	38.58	1.95	21.03
5 300.0	Recommended Limit		35.90 \pm 5 % (34.11 ~ 37.70)	4.76 \pm 5 % (4.52 ~ 5.00)	22 \pm 2
	Measured	2020-01-17	35.86	4.88	20.42
5 600.0	Recommended Limit		35.50 \pm 5 % (33.73 ~ 37.28)	5.07 \pm 5 % (4.82 ~ 5.32)	22 \pm 2
	Measured	2020-01-20	35.56	5.24	20.33
5 800.0	Recommended Limit		35.30 \pm 5 % (33.54 ~ 37.07)	5.27 \pm 5 % (5.01 ~ 5.53)	22 \pm 2
	Measured	2020-01-21	35.22	5.45	20.44

<Table 1. Measurement result of Head Tissue electric parameters>

10.2 Test System Verification

The microwave circuit arrangement for system verification is sketched below picture. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the Table 2. During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2) ^\circ\text{C}$, the relative humidity was in the range $(50 \pm 20)\%$ and the liquid depth Above the ear/grid reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

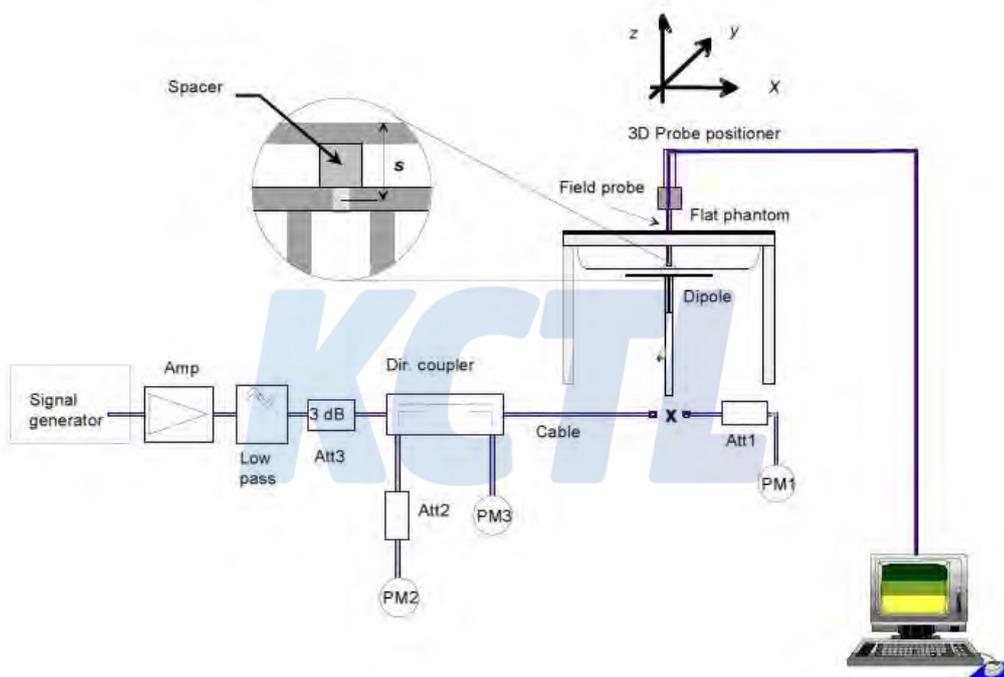

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (70) of (323)



Verification Kit	Probe S/N	Frequency (MHz)	Tissue Type	Limit/Measured (Normalized to 1 W)	
				Recommended Limit 1g (Normalized)	Measured
D750V3 SN: 1183	EX3DV4 SN: 3697	750.0	HSL	8.19 ± 10 % (7.37 ~ 9.01)	2020-01-13
				8.64	
D750V3 SN: 1183	EX3DV4 SN: 3697	750.0	HSL	8.19 ± 10 % (7.37 ~ 9.01)	2020-01-14
				8.68	
D850V2 SN: 1006	EX3DV4 SN: 7540	850.0	HSL	10.00 ± 10 % (9.00 ~ 11.00)	2020-01-13
				9.84	
D850V2 SN: 1006	EX3DV4 SN: 7540	850.0	HSL	10.00 ± 10 % (9.00 ~ 11.00)	2020-01-14
				10.00	
D1750V2 SN: 1072	EX3DV4 SN: 7540	1 750.0	HSL	36.80 ± 10 % (33.12 ~ 40.48)	2020-01-08
				36.20	
D1750V2 SN: 1072	EX3DV4 SN: 7540	1 750.0	HSL	36.80 ± 10 % (33.12 ~ 40.48)	2020-01-09
				37.04	
D1900V2 SN: 5d160	EX3DV4 SN: 7540	1 900.0	HSL	39.80 ± 10 % (35.82 ~ 43.78)	2020-01-06
				38.04	
D1900V2 SN: 5d160	EX3DV4 SN: 7540	1 900.0	HSL	39.80 ± 10 % (35.82 ~ 43.78)	2020-01-07
				38.44	
D2450V2 SN: 895	EX3DV4 SN: 7540	2 450.0	HSL	51.30 ± 10 % (46.17 ~ 56.43)	2020-01-22
				51.80	
D2600V2 SN: 1050	EX3DV4 SN: 3865	2 600.0	HSL	56.20 ± 10 % (50.58 ~ 61.82)	2020-01-09
				54.50	
D5GHzV2 SN: 1134	EX3DV4 SN: 7540	5 300.0	HSL	82.30 ± 10 % (74.07 ~ 90.53)	2020-01-17
				79.00	
D5GHzV2 SN: 1134	EX3DV4 SN: 7540	5 600.0	HSL	85.30 ± 10 % (76.77 ~ 93.83)	2020-01-20
				84.10	
D5GHzV2 SN: 1134	EX3DV4 SN: 7540	5 800.0	HSL	79.20 ± 10 % (71.28 ~ 87.12)	2020-01-21
				83.10	

<Table 2. System Verification 1g Result>

Verification Kit	Probe S/N	Frequency (MHz)	Tissue Type	Limit/Measured (Normalized to 1 W)	
				Recommended Limit 10g (Normalized)	Measured
D5GHzV2 SN: 1134	EX3DV4 SN: 7540	5 300.0	HSL	23.4 ± 10 % (21.06 ~ 25.74)	2020-01-17
				22.70	
D5GHzV2 SN: 1134	EX3DV4 SN: 7540	5 600.0	HSL	24.2 ± 10 % (21.78 ~ 26.62)	2020-01-20
				24.00	

<Table 3. System Verification 10g Result>

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (71) of (323)



11. SAR Test Results

11.1 Standalone Head SAR Test Results

GSM 850									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
Voice	Right Cheek	0	836.8	32.68	34.00	1.355	0.131	0.178	#1
	Right Tilt	0	836.8	32.68	34.00	1.355	0.081	0.110	
	Left Cheek	0	836.8	32.68	34.00	1.355	0.105	0.142	
	Left Tilt	0	836.8	32.68	34.00	1.355	0.081	0.110	
GPRS 4Tx	Right Cheek	0	836.8	27.93	28.00	1.016	0.152	0.154	
	Right Tilt	0	836.8	27.93	28.00	1.016	0.098	0.099	
	Left Cheek	0	836.8	27.93	28.00	1.016	0.123	0.125	
	Left Tilt	0	836.8	27.93	28.00	1.016	0.101	0.103	

GSM 1900									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
Voice	Right Cheek	0	1 880.0	30.13	31.00	1.222	0.064	0.078	
	Right Tilt	0	1 880.0	30.13	31.00	1.222	0.047	0.057	
	Left Cheek	0	1 880.0	30.13	31.00	1.222	0.101	0.123	
	Left Tilt	0	1 880.0	30.13	31.00	1.222	0.057	0.069	
GPRS 4Tx	Right Cheek	0	1 880.0	24.99	25.50	1.125	0.063	0.070	
	Right Tilt	0	1 880.0	24.99	25.50	1.125	0.048	0.054	
	Left Cheek	0	1 880.0	24.99	25.50	1.125	0.117	0.132	#2
	Left Tilt	0	1 880.0	24.99	25.50	1.125	0.056	0.063	

WCDMA Band II									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Right Cheek	0	1 880.0	24.12	24.50	1.091	0.119	0.130	
	Right Tilt	0	1 880.0	24.12	24.50	1.091	0.099	0.108	
	Left Cheek	0	1 880.0	24.12	24.50	1.091	0.208	0.227	#3
	Left Tilt	0	1 880.0	24.12	24.50	1.091	0.149	0.163	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (72) of (323)

**WCDMA Band IV**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Right Cheek	0	1 732.4	24.87	25.00	1.030	0.192	0.198	
	Right Tilt	0	1 732.4	24.87	25.00	1.030	0.161	0.166	
	Left Cheek	0	1 732.4	24.87	25.00	1.030	0.409	0.421	#4
	Left Tilt	0	1 732.4	24.87	25.00	1.030	0.204	0.210	

WCDMA Band V

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Right Cheek	0	836.6	24.68	25.00	1.076	0.175	0.188	#5
	Right Tilt	0	836.6	24.68	25.00	1.076	0.099	0.107	
	Left Cheek	0	836.6	24.68	25.00	1.076	0.136	0.146	
	Left Tilt	0	836.6	24.68	25.00	1.076	0.099	0.106	

LTE Band 2

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Right Cheek	0	1 880.0	24.05	25.00	1.245	0.103	0.128	
QPSK 20M 50RB 24Offset	Right Cheek	0	1 880.0	23.32	24.00	1.169	0.086	0.101	
QPSK 20M 1RB 49Offset	Right Tilt	0	1 880.0	24.05	25.00	1.245	0.073	0.091	
QPSK 20M 50RB 24Offset	Right Tilt	0	1 880.0	23.32	24.00	1.169	0.056	0.066	
QPSK 20M 1RB 49Offset	Left Cheek	0	1 880.0	24.05	25.00	1.245	0.203	0.253	#6
QPSK 20M 50RB 24Offset	Left Cheek	0	1 880.0	23.32	24.00	1.169	0.172	0.201	
QPSK 20M 1RB 49Offset	Left Tilt	0	1 880.0	24.05	25.00	1.245	0.094	0.117	
QPSK 20M 50RB 24Offset	Left Tilt	0	1 880.0	23.32	24.00	1.169	0.072	0.084	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (73) of (323)

**LTE Band 4**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Right Cheek	0	1 732.5	24.25	25.00	1.189	0.182	0.216	
QPSK 20M 50RB 24Offset	Right Cheek	0	1 732.5	23.67	24.00	1.079	0.151	0.163	
QPSK 20M 1RB 49Offset	Right Tilt	0	1 732.5	24.25	25.00	1.189	0.151	0.179	
QPSK 20M 50RB 24Offset	Right Tilt	0	1 732.5	23.67	24.00	1.079	0.121	0.131	
QPSK 20M 1RB 49Offset	Left Cheek	0	1 732.5	24.25	25.00	1.189	0.344	0.409	#7
QPSK 20M 50RB 24Offset	Left Cheek	0	1 732.5	23.67	24.00	1.079	0.281	0.303	
QPSK 20M 1RB 49Offset	Left Tilt	0	1 732.5	24.25	25.00	1.189	0.186	0.221	
QPSK 20M 50RB 24Offset	Left Tilt	0	1 732.5	23.67	24.00	1.079	0.142	0.153	

LTE Band 5

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 25Offset	Right Cheek	0	836.5	24.60	25.50	1.230	0.179	0.220	#8
QPSK 10M 25RB 12Offset	Right Cheek	0	836.5	23.95	24.50	1.135	0.145	0.165	
QPSK 10M 1RB 25Offset	Right Tilt	0	836.5	24.60	25.50	1.230	0.097	0.120	
QPSK 10M 25RB 12Offset	Right Tilt	0	836.5	23.95	24.50	1.135	0.080	0.091	
QPSK 10M 1RB 25Offset	Left Cheek	0	836.5	24.60	25.50	1.230	0.133	0.164	
QPSK 10M 25RB 12Offset	Left Cheek	0	836.5	23.95	24.50	1.135	0.107	0.121	
QPSK 10M 1RB 25Offset	Left Tilt	0	836.5	24.60	25.50	1.230	0.077	0.095	
QPSK 10M 25RB 12Offset	Left Tilt	0	836.5	23.95	24.50	1.135	0.067	0.076	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (74) of (323)

**LTE Band 12**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 25Offset	Right Cheek	0	707.5	24.90	25.50	1.148	0.081	0.093	#9
QPSK 10M 25RB 25Offset	Right Cheek	0	707.5	23.95	24.50	1.135	0.068	0.077	
QPSK 10M 1RB 25Offset	Right Tilt	0	707.5	24.90	25.50	1.148	0.050	0.057	
QPSK 10M 25RB 25Offset	Right Tilt	0	707.5	23.95	24.50	1.135	0.042	0.047	
QPSK 10M 1RB 25Offset	Left Cheek	0	707.5	24.90	25.50	1.148	0.069	0.079	
QPSK 10M 25RB 25Offset	Left Cheek	0	707.5	23.95	24.50	1.135	0.058	0.065	
QPSK 10M 1RB 25Offset	Left Tilt	0	707.5	24.90	25.50	1.148	0.045	0.052	
QPSK 10M 25RB 25Offset	Left Tilt	0	707.5	23.95	24.50	1.135	0.038	0.043	

LTE Band 13

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 0Offset	Right Cheek	0	782.0	24.52	25.50	1.253	0.044	0.056	#10
QPSK 10M 25RB 0Offset	Right Cheek	0	782.0	23.72	24.50	1.197	0.035	0.041	
QPSK 10M 1RB 0Offset	Right Tilt	0	782.0	24.52	25.50	1.253	0.024	0.030	
QPSK 10M 25RB 0Offset	Right Tilt	0	782.0	23.72	24.50	1.197	0.016	0.020	
QPSK 10M 1RB 0Offset	Left Cheek	0	782.0	24.52	25.50	1.253	0.028	0.034	
QPSK 10M 25RB 0Offset	Left Cheek	0	782.0	23.72	24.50	1.197	0.020	0.023	
QPSK 10M 1RB 0Offset	Left Tilt	0	782.0	24.52	25.50	1.253	0.023	0.028	
QPSK 10M 25RB 0Offset	Left Tilt	0	782.0	23.72	24.50	1.197	0.017	0.021	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (75) of (323)

**LTE Band 17**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 25Offset	Right Cheek	0	710.0	24.71	25.50	1.199	0.067	0.080	
QPSK 10M 25RB 25Offset	Right Cheek	0	710.0	24.00	24.50	1.122	0.055	0.061	
QPSK 10M 1RB 25Offset	Right Tilt	0	710.0	24.71	25.50	1.199	0.039	0.047	
QPSK 10M 25RB 25Offset	Right Tilt	0	710.0	24.00	24.50	1.122	0.031	0.034	
QPSK 10M 1RB 25Offset	Left Cheek	0	710.0	24.71	25.50	1.199	0.069	0.082	#11
QPSK 10M 25RB 25Offset	Left Cheek	0	710.0	24.00	24.50	1.122	0.058	0.065	
QPSK 10M 1RB 25Offset	Left Tilt	0	710.0	24.71	25.50	1.199	0.043	0.051	
QPSK 10M 25RB 25Offset	Left Tilt	0	710.0	24.00	24.50	1.122	0.036	0.040	

LTE Band 26

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 15M 1RB 0Offset	Right Cheek	0	831.5	24.56	25.50	1.242	0.151	0.187	#12
QPSK 15M 36RB 0Offset	Right Cheek	0	831.5	23.90	24.50	1.148	0.136	0.156	
QPSK 15M 1RB 0Offset	Right Tilt	0	831.5	24.56	25.50	1.242	0.106	0.132	
QPSK 15M 36RB 0Offset	Right Tilt	0	831.5	23.90	24.50	1.148	0.089	0.102	
QPSK 15M 1RB 0Offset	Left Cheek	0	831.5	24.56	25.50	1.242	0.133	0.165	
QPSK 15M 36RB 0Offset	Left Cheek	0	831.5	23.90	24.50	1.148	0.102	0.117	
QPSK 15M 1RB 0Offset	Left Tilt	0	831.5	24.56	25.50	1.242	0.078	0.097	
QPSK 15M 36RB 0Offset	Left Tilt	0	831.5	23.90	24.50	1.148	0.059	0.067	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (76) of (323)

**LTE Band 41**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Right Cheek	0	2 680.0	23.96	24.50	1.132	0.067	0.076	
QPSK 20M 50RB 0Offset	Right Cheek	0	2 680.0	23.17	23.50	1.079	0.058	0.062	
QPSK 20M 1RB 49Offset	Right Tilt	0	2 680.0	23.96	24.50	1.132	0.074	0.084	
QPSK 20M 50RB 0Offset	Right Tilt	0	2 680.0	23.17	23.50	1.079	0.060	0.065	
QPSK 20M 1RB 49Offset	Left Cheek	0	2 680.0	23.96	24.50	1.132	0.094	0.107	#13
QPSK 20M 50RB 0Offset	Left Cheek	0	2 680.0	23.17	23.50	1.079	0.083	0.089	
QPSK 20M 1RB 49Offset	Left Tilt	0	2 680.0	23.96	24.50	1.132	0.033	0.037	
QPSK 20M 50RB 0Offset	Left Tilt	0	2 680.0	23.17	23.50	1.079	0.027	0.029	

LTE Band 66

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 0Offset	Right Cheek	0	1 770.0	24.09	25.00	1.233	0.147	0.181	
QPSK 20M 50RB 0Offset	Right Cheek	0	1 770.0	23.76	24.00	1.057	0.136	0.144	
QPSK 20M 1RB 0Offset	Right Tilt	0	1 770.0	24.09	25.00	1.233	0.119	0.147	
QPSK 20M 50RB 0Offset	Right Tilt	0	1 770.0	23.76	24.00	1.057	0.118	0.125	
QPSK 20M 1RB 0Offset	Left Cheek	0	1 770.0	24.09	25.00	1.233	0.286	0.353	#14
QPSK 20M 50RB 0Offset	Left Cheek	0	1 770.0	23.76	24.00	1.057	0.278	0.294	
QPSK 20M 1RB 0Offset	Left Tilt	0	1 770.0	24.09	25.00	1.233	0.173	0.213	
QPSK 20M 50RB 0Offset	Left Tilt	0	1 770.0	23.76	24.00	1.057	0.159	0.168	

DTS

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
802.11b	Right Cheek	0	2 462.0	14.42	15.00	1.143	1.119	0.118	0.151	#15
	Right Tilt	0	2 462.0	14.42	15.00	1.143	1.119	0.096	0.123	
	Left Cheek	0	2 462.0	14.42	15.00	1.143	1.119	0.052	0.066	
	Left Tilt	0	2 462.0	14.42	15.00	1.143	1.119	0.044	0.056	

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIA002-004/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (77) of (323)

**NII**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
802.11ac (VHT-80)	Right Cheek	0	5 290.0	13.73	14.00	1.064	1.053	0.183	0.205	
	Right Tilt	0	5 290.0	13.73	14.00	1.064	1.053	0.219	0.245	#16
	Left Cheek	0	5 290.0	13.73	14.00	1.064	1.053	0.121	0.136	
	Left Tilt	0	5 290.0	13.73	14.00	1.064	1.053	0.161	0.180	
802.11ac (VHT-80)	Right Cheek	0	5 530.0	13.21	14.00	1.199	1.053	0.244	0.308	
	Right Tilt	0	5 530.0	13.21	14.00	1.199	1.053	0.317	0.400	#17
	Left Cheek	0	5 530.0	13.21	14.00	1.199	1.053	0.201	0.254	
	Left Tilt	0	5 530.0	13.21	14.00	1.199	1.053	0.249	0.314	
802.11ac (VHT-80)	Right Cheek	0	5 775.0	13.11	14.00	1.227	1.053	0.361	0.466	
	Right Tilt	0	5 775.0	13.11	14.00	1.227	1.053	0.402	0.519	#18
	Left Cheek	0	5 775.0	13.11	14.00	1.227	1.053	0.259	0.335	
	Left Tilt	0	5 775.0	13.11	14.00	1.227	1.053	0.339	0.438	

Bluetooth

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
DH1	Right Cheek	0	2 402.0	10.31	10.50	1.045	3.436	0.020	0.071	#19
	Right Tilt	0	2 402.0	10.31	10.50	1.045	3.436	0.011	0.038	
	Left Cheek	0	2 402.0	10.31	10.50	1.045	3.436	0.016	0.059	
	Left Tilt	0	2 402.0	10.31	10.50	1.045	3.436	0.005	0.018	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (78) of (323)



11.2 Standalone Body-Worn SAR Test Results

GSM 850									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
Voice	Front	15	836.8	32.68	34.00	1.355	0.115	0.156	
	Rear	15	836.8	32.68	34.00	1.355	0.219	0.297	#20
GPRS 4Tx	Front	15	836.8	27.93	28.00	1.016	0.124	0.126	
	Rear	15	836.8	27.93	28.00	1.016	0.255	0.259	

GSM 1900									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
Voice	Front	15	1 880.0	30.13	31.00	1.222	0.118	0.144	
	Rear	15	1 880.0	30.13	31.00	1.222	0.148	0.181	
GPRS 4Tx	Front	15	1 880.0	24.99	25.50	1.125	0.132	0.148	
	Rear	15	1 880.0	24.99	25.50	1.125	0.164	0.184	#21

WCDMA Band II									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Front	15	1 880.0	24.12	24.50	1.091	0.231	0.252	
	Rear	15	1 880.0	24.12	24.50	1.091	0.340	0.371	#22

WCDMA Band IV									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Front	15	1 732.4	24.87	25.00	1.030	0.361	0.372	#23
	Rear	15	1 732.4	24.87	25.00	1.030	0.331	0.341	

WCDMA Band V									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Front	15	836.6	24.68	25.00	1.076	0.158	0.170	
	Rear	15	836.6	24.68	25.00	1.076	0.289	0.311	#24

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (79) of (323)

**LTE Band 2**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Front	15	1 880.0	24.05	25.00	1.245	0.239	0.297	
QPSK 20M 50RB 24Offset	Front	15	1 880.0	23.32	24.00	1.169	0.190	0.222	
QPSK 20M 1RB 49Offset	Rear	15	1 880.0	24.05	25.00	1.245	0.291	0.362	#25
QPSK 20M 50RB 24Offset	Rear	15	1 880.0	23.32	24.00	1.169	0.232	0.271	

LTE Band 4

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Front	15	1 732.5	24.25	25.00	1.189	0.315	0.374	
QPSK 20M 50RB 24Offset	Front	15	1 732.5	23.67	24.00	1.079	0.258	0.278	
QPSK 20M 1RB 49Offset	Rear	15	1 732.5	24.25	25.00	1.189	0.341	0.405	#26
QPSK 20M 50RB 24Offset	Rear	15	1 732.5	23.67	24.00	1.079	0.277	0.299	

LTE Band 5

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 25Offset	Front	15	836.5	24.60	25.50	1.230	0.147	0.181	
QPSK 10M 25RB 12Offset	Front	15	836.5	23.95	24.50	1.135	0.120	0.136	
QPSK 10M 1RB 25Offset	Rear	15	836.5	24.60	25.50	1.230	0.260	0.320	#27
QPSK 10M 25RB 12Offset	Rear	15	836.5	23.95	24.50	1.135	0.215	0.244	

LTE Band 12

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 25Offset	Front	15	707.5	24.90	25.50	1.148	0.054	0.061	
QPSK 10M 25RB 25Offset	Front	15	707.5	23.95	24.50	1.135	0.049	0.056	
QPSK 10M 1RB 25Offset	Rear	15	707.5	24.90	25.50	1.148	0.145	0.166	#28
QPSK 10M 25RB 25Offset	Rear	15	707.5	23.95	24.50	1.135	0.125	0.142	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (80) of (323)

**LTE Band 13**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 0Offset	Front	15	782.0	24.52	25.50	1.253	0.037	0.046	
QPSK 10M 25RB 0Offset	Front	15	782.0	23.72	24.50	1.197	0.032	0.038	
QPSK 10M 1RB 0Offset	Rear	15	782.0	24.50	25.50	1.259	0.167	0.210	#29
QPSK 10M 25RB 0Offset	Rear	15	782.0	23.72	24.50	1.197	0.136	0.163	

LTE Band 17

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 25Offset	Front	15	710.0	24.71	25.50	1.199	0.064	0.077	
QPSK 10M 25RB 25Offset	Front	15	710.0	24.00	24.50	1.122	0.056	0.062	
QPSK 10M 1RB 25Offset	Rear	15	710.0	24.70	25.50	1.202	0.121	0.145	
QPSK 10M 25RB 25Offset	Rear	15	710.0	24.00	24.50	1.122	0.145	0.163	#30

LTE Band 26

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 15M 1RB 0Offset	Front	15	831.5	24.56	25.50	1.242	0.114	0.142	
QPSK 15M 36RB 0Offset	Front	15	831.5	23.90	24.50	1.148	0.114	0.131	
QPSK 15M 1RB 0Offset	Rear	15	831.5	24.56	25.50	1.242	0.235	0.292	#31
QPSK 15M 36RB 0Offset	Rear	15	831.5	23.90	24.50	1.148	0.206	0.237	

LTE Band 41

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Front	15	2 680.0	23.96	24.50	1.132	0.107	0.121	
QPSK 20M 50RB 0Offset	Front	15	2 680.0	23.17	23.50	1.079	0.092	0.100	
QPSK 20M 1RB 49Offset	Rear	15	2 680.0	23.96	24.50	1.132	0.230	0.260	#32
QPSK 20M 50RB 0Offset	Rear	15	2 680.0	23.17	23.50	1.079	0.193	0.208	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (81) of (323)

**LTE Band 66**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 0Offset	Front	15	1 770.0	24.09	25.00	1.233	0.241	0.297	
QPSK 20M 50RB 0Offset	Front	15	1 770.0	23.76	24.00	1.057	0.226	0.239	
QPSK 20M 1RB 0Offset	Rear	15	1 770.0	24.09	25.00	1.233	0.252	0.311	#33
QPSK 20M 50RB 0Offset	Rear	15	1 770.0	23.76	24.00	1.057	0.243	0.257	

DTS

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
802.11b	Front	15	2 437.0	17.98	19.50	1.419	1.119	0.072	0.114	
	Rear	15	2 437.0	17.98	19.50	1.419	1.119	0.142	0.225	#34

NII

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
802.11a	Front	15	5 260.0	16.05	17.00	1.245	1.011	0.026	0.033	
	Rear	15	5 260.0	16.05	17.00	1.245	1.011	0.219	0.276	#35
802.11a	Front	15	5 720.0	16.52	17.00	1.117	1.011	0.053	0.060	
	Rear	15	5 720.0	16.52	17.00	1.117	1.011	0.496	0.560	#36
802.11a	Front	15	5 745.0	15.79	17.00	1.321	1.011	0.032	0.042	
	Rear	15	5 745.0	15.79	17.00	1.321	1.011	0.515	0.688	#37

Bluetooth

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
DH1	Front	15	2 402.0	10.31	10.50	1.045	3.436	0.001	0.005	
	Rear	15	2 402.0	10.31	10.50	1.045	3.436	0.002	0.009	#38

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
 Suwon-si, Gyeonggi-do, 16677, Korea
 TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
 KR20-SPF0004-A
 Page (82) of (323)



11.3 Standalone Hotspot SAR Test Results

GSM 850									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
GPRS4Tx	Front	10	836.8	27.93	28.00	1.016	0.120	0.122	
	Rear	10	836.8	27.93	28.00	1.016	0.293	0.298	#39
	Left	10	836.8	27.93	28.00	1.016	0.119	0.121	
	Right	10	836.8	27.93	28.00	1.016	0.286	0.291	
	Bottom	10	836.8	27.93	28.00	1.016	0.152	0.154	

GSM 1900									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
GPRS4Tx	Front	10	1 880.0	24.99	25.50	1.125	0.244	0.274	
	Rear	10	1 880.0	24.99	25.50	1.125	0.350	0.394	#40
	Left	10	1 880.0	24.99	25.50	1.125	0.242	0.272	
	Right	10	1 880.0	24.99	25.50	1.125	0.039	0.044	
	Bottom	10	1 880.0	24.99	25.50	1.125	0.184	0.207	

WCDMA Band II									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Front	10	1 880.0	24.12	24.50	1.091	0.422	0.461	
	Rear	10	1 880.0	24.12	24.50	1.091	0.663	0.724	#41
	Left	10	1 880.0	24.12	24.50	1.091	0.446	0.487	
	Right	10	1 880.0	24.12	24.50	1.091	0.084	0.092	
	Bottom	10	1 880.0	24.12	24.50	1.091	0.252	0.275	

WCDMA Band IV									
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Front	10	1 732.4	24.87	25.00	1.030	0.608	0.626	
	Rear	10	1 732.4	24.87	25.00	1.030	0.646	0.666	#42
	Left	10	1 732.4	24.87	25.00	1.030	0.634	0.653	
	Right	10	1 732.4	24.87	25.00	1.030	0.110	0.113	
	Bottom	10	1 732.4	24.87	25.00	1.030	0.351	0.362	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (83) of (323)

**WCDMA Band V**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
RMC	Front	10	836.6	24.68	25.00	1.076	0.152	0.164	
	Rear	10	836.6	24.68	25.00	1.076	0.348	0.375	#43
	Left	10	836.6	24.68	25.00	1.076	0.161	0.173	
	Right	10	836.6	24.68	25.00	1.076	0.278	0.299	
	Bottom	10	836.6	24.68	25.00	1.076	0.092	0.099	

LTE Band 2

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Front	10	1 880.0	24.05	25.00	1.245	0.431	0.536	
QPSK 20M 50RB 24Offset	Front	10	1 880.0	23.32	24.00	1.169	0.349	0.408	
QPSK 20M 1RB 49Offset	Rear	10	1 880.0	24.05	25.00	1.245	0.590	0.734	#44
QPSK 20M 50RB 24Offset	Rear	10	1 880.0	23.32	24.00	1.169	0.478	0.559	
QPSK 20M 1RB 49Offset	Left	10	1 880.0	24.05	25.00	1.245	0.424	0.528	
QPSK 20M 50RB 24Offset	Left	10	1 880.0	23.32	24.00	1.169	0.341	0.399	
QPSK 20M 1RB 49Offset	Right	10	1 880.0	24.05	25.00	1.245	0.070	0.087	
QPSK 20M 50RB 24Offset	Right	10	1 880.0	23.32	24.00	1.169	0.056	0.065	
QPSK 20M 1RB 49Offset	Bottom	10	1 880.0	24.05	25.00	1.245	0.193	0.240	
QPSK 20M 50RB 24Offset	Bottom	10	1 880.0	23.32	24.00	1.169	0.199	0.233	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (84) of (323)

**LTE Band 4**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Front	10	1 732.5	24.25	25.00	1.189	0.528	0.628	
QPSK 20M 50RB 24Offset	Front	10	1 732.5	23.67	24.00	1.079	0.431	0.465	
QPSK 20M 1RB 49Offset	Rear	10	1 732.5	24.25	25.00	1.189	0.624	0.742	#45
QPSK 20M 50RB 24Offset	Rear	10	1 732.5	23.67	24.00	1.079	0.512	0.552	
QPSK 20M 1RB 49Offset	Left	10	1 732.5	24.25	25.00	1.189	0.552	0.656	
QPSK 20M 50RB 24Offset	Left	10	1 732.5	23.67	24.00	1.079	0.448	0.483	
QPSK 20M 1RB 49Offset	Right	10	1 732.5	24.25	25.00	1.189	0.070	0.083	
QPSK 20M 50RB 24Offset	Right	10	1 732.5	23.67	24.00	1.079	0.059	0.063	
QPSK 20M 1RB 49Offset	Bottom	10	1 732.5	24.25	25.00	1.189	0.302	0.359	
QPSK 20M 50RB 24Offset	Bottom	10	1 732.5	23.67	24.00	1.079	0.311	0.336	

LTE Band 5

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 25Offset	Front	10	836.5	24.60	25.50	1.230	0.139	0.171	
QPSK 10M 25RB 12Offset	Front	10	836.5	23.95	24.50	1.135	0.115	0.131	
QPSK 10M 1RB 25Offset	Rear	10	836.5	24.60	25.50	1.230	0.442	0.544	#46
QPSK 10M 25RB 12Offset	Rear	10	836.5	23.95	24.50	1.135	0.326	0.370	
QPSK 10M 1RB 25Offset	Left	10	836.5	24.60	25.50	1.230	0.113	0.139	
QPSK 10M 25RB 12Offset	Left	10	836.5	23.95	24.50	1.135	0.095	0.107	
QPSK 10M 1RB 25Offset	Right	10	836.5	24.60	25.50	1.230	0.215	0.265	
QPSK 10M 25RB 12Offset	Right	10	836.5	23.95	24.50	1.135	0.178	0.202	
QPSK 10M 1RB 25Offset	Bottom	10	836.5	24.60	25.50	1.230	0.082	0.101	
QPSK 10M 25RB 12Offset	Bottom	10	836.5	23.95	24.50	1.135	0.071	0.081	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (85) of (323)

**LTE Band 12**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 25Offset	Front	10	707.5	24.90	25.50	1.148	0.065	0.074	
QPSK 10M 25RB 25Offset	Front	10	707.5	23.95	24.50	1.135	0.059	0.066	
QPSK 10M 1RB 25Offset	Rear	10	707.5	24.90	25.50	1.148	0.245	0.281	#47
QPSK 10M 25RB 25Offset	Rear	10	707.5	23.95	24.50	1.135	0.217	0.246	
QPSK 10M 1RB 25Offset	Left	10	707.5	24.90	25.50	1.148	0.079	0.091	
QPSK 10M 25RB 25Offset	Left	10	707.5	23.95	24.50	1.135	0.063	0.072	
QPSK 10M 1RB 25Offset	Right	10	707.5	24.90	25.50	1.148	0.118	0.135	
QPSK 10M 25RB 25Offset	Right	10	707.5	23.95	24.50	1.135	0.107	0.121	
QPSK 10M 1RB 25Offset	Bottom	10	707.5	24.90	25.50	1.148	0.033	0.038	
QPSK 10M 25RB 25Offset	Bottom	10	707.5	23.95	24.50	1.135	0.031	0.035	

LTE Band 13

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 0Offset	Front	10	782.0	24.52	25.50	1.253	0.058	0.072	
QPSK 10M 25RB 0Offset	Front	10	782.0	23.72	24.50	1.197	0.047	0.056	
QPSK 10M 1RB 0Offset	Rear	10	782.0	24.52	25.50	1.253	0.369	0.462	#48
QPSK 10M 25RB 0Offset	Rear	10	782.0	23.72	24.50	1.197	0.302	0.361	
QPSK 10M 1RB 0Offset	Left	10	782.0	24.52	25.50	1.253	0.067	0.084	
QPSK 10M 25RB 0Offset	Left	10	782.0	23.72	24.50	1.197	0.049	0.059	
QPSK 10M 1RB 0Offset	Right	10	782.0	24.52	25.50	1.253	0.069	0.087	
QPSK 10M 25RB 0Offset	Right	10	782.0	23.72	24.50	1.197	0.060	0.071	
QPSK 10M 1RB 0Offset	Bottom	10	782.0	24.52	25.50	1.253	0.090	0.113	
QPSK 10M 25RB 0Offset	Bottom	10	782.0	23.72	24.50	1.197	0.076	0.090	

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIA002-004/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (86) of (323)

**LTE Band 17**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 25Offset	Front	10	710.0	24.71	25.50	1.199	0.070	0.083	
QPSK 10M 25RB 25Offset	Front	10	710.0	24.00	24.50	1.122	0.061	0.068	
QPSK 10M 1RB 25Offset	Rear	10	710.0	24.71	25.50	1.199	0.240	0.288	#49
QPSK 10M 25RB 25Offset	Rear	10	710.0	24.00	24.50	1.122	0.211	0.237	
QPSK 10M 1RB 25Offset	Left	10	710.0	24.71	25.50	1.199	0.085	0.101	
QPSK 10M 25RB 25Offset	Left	10	710.0	24.00	24.50	1.122	0.072	0.081	
QPSK 10M 1RB 25Offset	Right	10	710.0	24.71	25.50	1.199	0.110	0.132	
QPSK 10M 25RB 25Offset	Right	10	710.0	24.00	24.50	1.122	0.097	0.109	
QPSK 10M 1RB 25Offset	Bottom	10	710.0	24.71	25.50	1.199	0.037	0.044	
QPSK 10M 25RB 25Offset	Bottom	10	710.0	24.00	24.50	1.122	0.033	0.037	

LTE Band 26

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 15M 1RB 0Offset	Front	10	831.5	24.56	25.50	1.242	0.129	0.160	
QPSK 15M 36RB 0Offset	Front	10	831.5	23.90	24.50	1.148	0.115	0.132	
QPSK 15M 1RB 0Offset	Rear	10	831.5	24.56	25.50	1.242	0.324	0.402	#50
QPSK 15M 36RB 0Offset	Rear	10	831.5	23.90	24.50	1.148	0.295	0.339	
QPSK 15M 1RB 0Offset	Left	10	831.5	24.56	25.50	1.242	0.148	0.184	
QPSK 15M 36RB 0Offset	Left	10	831.5	23.90	24.50	1.148	0.121	0.139	
QPSK 15M 1RB 0Offset	Right	10	831.5	24.56	25.50	1.242	0.189	0.235	
QPSK 15M 36RB 0Offset	Right	10	831.5	23.90	24.50	1.148	0.161	0.185	
QPSK 15M 1RB 0Offset	Bottom	10	831.5	24.56	25.50	1.242	0.065	0.081	
QPSK 15M 36RB 0Offset	Bottom	10	831.5	23.90	24.50	1.148	0.059	0.067	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (87) of (323)

**LTE Band 41**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 49Offset	Front	10	2 680.0	23.96	24.50	1.132	0.120	0.136	
QPSK 20M 50RB 0Offset	Front	10	2 680.0	23.17	23.50	1.079	0.100	0.107	
QPSK 20M 1RB 49Offset	Rear	10	2 680.0	23.96	24.50	1.132	0.473	0.536	#51
QPSK 20M 50RB 0Offset	Rear	10	2 680.0	23.17	23.50	1.079	0.397	0.428	
QPSK 20M 1RB 49Offset	Left	10	2 680.0	23.96	24.50	1.132	0.116	0.131	
QPSK 20M 50RB 0Offset	Left	10	2 680.0	23.17	23.50	1.079	0.098	0.105	
QPSK 20M 1RB 49Offset	Right	10	2 680.0	23.96	24.50	1.132	0.014	0.015	
QPSK 20M 50RB 0Offset	Right	10	2 680.0	23.17	23.50	1.079	0.009	0.009	
QPSK 20M 1RB 49Offset	Bottom	10	2 680.0	23.96	24.50	1.132	0.183	0.207	
QPSK 20M 50RB 0Offset	Bottom	10	2 680.0	23.17	23.50	1.079	0.156	0.168	

LTE Band 66

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 20M 1RB 0Offset	Front	10	1 770.0	24.09	25.00	1.233	0.443	0.546	
QPSK 20M 50RB 0Offset	Front	10	1 770.0	23.76	24.00	1.057	0.425	0.449	
QPSK 20M 1RB 0Offset	Rear	10	1 770.0	24.09	25.00	1.233	0.554	0.683	#52
QPSK 20M 50RB 0Offset	Rear	10	1 770.0	23.76	24.00	1.057	0.515	0.544	
QPSK 20M 1RB 0Offset	Left	10	1 770.0	24.09	25.00	1.233	0.508	0.626	
QPSK 20M 50RB 0Offset	Left	10	1 770.0	23.76	24.00	1.057	0.485	0.513	
QPSK 20M 1RB 0Offset	Right	10	1 770.0	24.09	25.00	1.233	0.060	0.074	
QPSK 20M 50RB 0Offset	Right	10	1 770.0	23.76	24.00	1.057	0.062	0.066	
QPSK 20M 1RB 0Offset	Bottom	10	1 770.0	24.09	25.00	1.233	0.286	0.353	
QPSK 20M 50RB 0Offset	Bottom	10	1 770.0	23.76	24.00	1.057	0.279	0.295	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (88) of (323)

**DTS**

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
802.11b	Front	10	2 437.0	17.98	19.50	1.419	1.119	0.124	0.197	
	Rear	10	2 437.0	17.98	19.50	1.419	1.119	0.305	0.484	#53
	Left	10	2 437.0	17.98	19.50	1.419	1.119	0.149	0.237	
	Top	10	2 437.0	17.98	19.50	1.419	1.119	0.077	0.122	

NII

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
802.11a	Front	10	5 240.0	15.91	17.00	1.285	1.053	0.060	0.081	
	Rear	10	5 240.0	15.91	17.00	1.285	1.053	0.394	0.533	#54
	Left	10	5 240.0	15.91	17.00	1.285	1.053	0.084	0.113	
	Top	10	5 240.0	15.91	17.00	1.285	1.053	0.217	0.294	
802.11a	Front	10	5 745.0	15.79	17.00	1.321	1.053	0.099	0.138	
	Rear	10	5 745.0	15.79	17.00	1.321	1.053	0.861	1.198	#55
	Rear	10	5 825.0	15.72	17.00	1.343	1.053	0.774	1.094	
	Left	10	5 745.0	15.79	17.00	1.321	1.053	0.141	0.196	
	Top	10	5 745.0	15.79	17.00	1.321	1.053	0.774	1.077	
	Top	10	5 825.0	15.72	17.00	1.343	1.053	0.678	0.958	
Repeated SAR Test										
	Rear	10	5 745.0	15.79	17.00	1.321	1.053	0.738	1.026	

Bluetooth

Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
DH1	Front	10	2 402.0	10.31	10.50	1.045	3.436	0.003	0.012	
	Rear	10	2 402.0	10.31	10.50	1.045	3.436	0.011	0.041	#56
	Left	10	2 402.0	10.31	10.50	1.045	3.436	0.003	0.012	
	Top	10	2 402.0	10.31	10.50	1.045	3.436	0.001	0.004	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (89) of (323)



11.4 Standalone Phablet SAR Test Results

NII										
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 10 g SAR (W/kg)	Scaled 10 g SAR (W/kg)	Plot No.
802.11a	Front	0	5 260.0	16.05	17.00	1.245	1.011	0.169	0.213	
	Rear	0	5 260.0	16.05	17.00	1.245	1.011	0.683	0.859	#57
	Left	0	5 260.0	16.05	17.00	1.245	1.011	0.137	0.172	
	Top	0	5 260.0	16.05	17.00	1.245	1.011	0.638	0.803	
802.11a	Front	0	5 720.0	16.52	17.00	1.117	1.011	0.370	0.418	
	Rear	0	5 720.0	16.52	17.00	1.117	1.011	1.290	1.457	
	Left	0	5 720.0	16.52	17.00	1.117	1.011	0.259	0.292	
	Top	0	5 720.0	16.52	17.00	1.117	1.011	1.390	1.570	#58



KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (90) of (323)



General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
7. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
8. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
9. This device utilizes power reduction for some wireless modes, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.

GSM Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
4. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not $> \frac{1}{2}$ dB, the middle channel was used for testing.

WCDMA Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s).

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (91) of (323)



LTE Notes:

1. Justification Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
2. When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
3. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
4. Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
5. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
6. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator.
7. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
8. TDD LTE was tested using UL-DL configuration 0 with 6 UL sub frames and 2S sub-frames using extended cyclic prefix only and special sub frame configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Sec. 4, the duty factor using extended cyclic prefix is $0.633(cf=1.58)$.
9. For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

WLAN & Bluetooth Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
2. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
3. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
4. When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begins SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is ≤ 1.2 W/kg, SAR is not required for UNII band1 > 1.2 W/kg, both bands should be tested independently for SAR.
5. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (92) of (323)

KCTL**12. Simultaneous Transmission**

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g or 10g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is within SAR limits. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

KCTL

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (93) of (323)



12.1 Simultaneous Transmission Analysis

Exposure Condition /Position		licensed	WLAN		Bluetooth	Summation			
			2.4 GHz	5 GHz		[①+②]	[①+③]	[①+④]	[①+③+④]
		[①]	[②]	[③]	[④]	[①+②]	[①+③]	[①+④]	[①+③+④]
GSM/GPRS 850 Band									
Head	Right Cheek	0.178	0.151	0.466	0.071	0.329	0.644	0.248	0.715
	Right Tilt	0.110	0.123	0.519	0.038	0.233	0.629	0.148	0.668
	Left Cheek	0.142	0.066	0.335	0.059	0.208	0.477	0.201	0.536
	Left Tilt	0.110	0.056	0.438	0.018	0.166	0.548	0.128	0.566
Body-Worn	Front	0.156	0.114	0.062	0.005	0.270	0.218	0.160	0.222
	Rear	0.297	0.225	0.688	0.009	0.522	0.985	0.305	0.993
Hotspot	Front	0.122	0.197	0.138	0.012	0.319	0.260	0.134	0.272
	Rear	0.298	0.484	1.198	0.041	0.782	1.495	0.339	1.537
	Left	0.121	0.237	0.196	0.012	0.358	0.317	0.133	0.329
	Right	0.291	-	-	-	0.291	0.291	0.291	0.291
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.154	-	-	-	0.154	0.154	0.154	0.154
GSM/GPRS 1900 Band									
Head	Right Cheek	0.078	0.151	0.466	0.071	0.229	0.545	0.149	0.615
	Right Tilt	0.057	0.123	0.519	0.038	0.180	0.577	0.096	0.615
	Left Cheek	0.132	0.066	0.335	0.059	0.198	0.467	0.191	0.526
	Left Tilt	0.069	0.056	0.438	0.018	0.125	0.507	0.087	0.525
Body-Worn	Front	0.148	0.114	0.062	0.005	0.262	0.210	0.153	0.215
	Rear	0.184	0.225	0.688	0.009	0.409	0.872	0.193	0.881
Hotspot	Front	0.274	0.197	0.138	0.012	0.471	0.412	0.287	0.425
	Rear	0.394	0.484	1.198	0.041	0.878	1.591	0.435	1.633
	Left	0.272	0.237	0.196	0.012	0.509	0.468	0.284	0.480
	Right	0.044	-	-	-	0.044	0.044	0.044	0.044
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.207	-	-	-	0.207	0.207	0.207	0.207

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (94) of (323)



Exposure Condition /Position	licensed	WLAN		Bluetooth	Summation				
		2.4 GHz	5 GHz		[①+②]	[①+③]	[①+④]	[①+③+④]	
	[①]	[②]	[③]	[④]	[①+②]	[①+③]	[①+④]	[①+③+④]	
WCDMA Band II									
Head	Right Cheek	0.130	0.151	0.466	0.071	0.281	0.596	0.201	0.667
	Right Tilt	0.108	0.123	0.519	0.038	0.231	0.628	0.147	0.666
	Left Cheek	0.227	0.066	0.335	0.059	0.293	0.562	0.286	0.621
	Left Tilt	0.163	0.056	0.438	0.018	0.219	0.601	0.181	0.619
Body-Worn	Front	0.252	0.114	0.062	0.005	0.366	0.314	0.257	0.319
	Rear	0.371	0.225	0.688	0.009	0.596	1.059	0.380	1.068
Hotspot	Front	0.461	0.197	0.138	0.012	0.658	0.599	0.473	0.611
	Rear	0.724	0.484	1.198	0.041	1.208	1.921	0.765	1.963
	Left	0.487	0.237	0.196	0.012	0.724	0.683	0.498	0.695
	Right	0.092	-	-	-	0.092	0.092	0.092	0.092
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.275	-	-	-	0.275	0.275	0.275	0.275
WCDMA Band IV									
Head	Right Cheek	0.198	0.151	0.466	0.071	0.349	0.664	0.269	0.735
	Right Tilt	0.166	0.123	0.519	0.038	0.289	0.685	0.204	0.724
	Left Cheek	0.421	0.066	0.335	0.059	0.487	0.756	0.480	0.815
	Left Tilt	0.210	0.056	0.438	0.018	0.266	0.648	0.228	0.666
Body-Worn	Front	0.372	0.114	0.062	0.005	0.486	0.434	0.377	0.439
	Rear	0.341	0.225	0.688	0.009	0.566	1.029	0.350	1.038
Hotspot	Front	0.626	0.197	0.138	0.012	0.823	0.764	0.639	0.777
	Rear	0.666	0.484	1.198	0.041	1.150	1.863	0.707	1.905
	Left	0.653	0.237	0.196	0.012	0.890	0.849	0.665	0.861
	Right	0.113	-	-	-	0.113	0.113	0.113	0.113
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.362	-	-	-	0.362	0.362	0.362	0.362

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (95) of (323)



Exposure Condition /Position	licensed	WLAN		Bluetooth	Summation				
		2.4 GHz	5 GHz		[①+②]	[①+③]	[①+④]	[①+③+④]	
	[①]	[②]	[③]	[④]	[①+②]	[①+③]	[①+④]	[①+③+④]	
WCDMA Band V									
Head	Right Cheek	0.188	0.151	0.466	0.071	0.339	0.655	0.259	0.726
	Right Tilt	0.107	0.123	0.519	0.038	0.230	0.626	0.145	0.665
	Left Cheek	0.146	0.066	0.335	0.059	0.212	0.481	0.205	0.540
	Left Tilt	0.106	0.056	0.438	0.018	0.162	0.544	0.124	0.562
Body-Worn	Front	0.170	0.114	0.062	0.005	0.284	0.232	0.175	0.237
	Rear	0.311	0.225	0.688	0.009	0.536	0.999	0.320	1.008
Hotspot	Front	0.164	0.197	0.138	0.012	0.361	0.302	0.176	0.314
	Rear	0.375	0.484	1.198	0.041	0.859	1.572	0.416	1.614
	Left	0.173	0.237	0.196	0.012	0.410	0.369	0.185	0.381
	Right	0.299	-	-	-	0.299	0.299	0.299	0.299
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.099	-	-	-	0.099	0.099	0.099	0.099
LTE Band 2									
Head	Right Cheek	0.128	0.151	0.466	0.071	0.279	0.595	0.199	0.665
	Right Tilt	0.091	0.123	0.519	0.038	0.214	0.610	0.129	0.649
	Left Cheek	0.253	0.066	0.335	0.059	0.319	0.587	0.312	0.646
	Left Tilt	0.117	0.056	0.438	0.018	0.173	0.555	0.135	0.573
Body-Worn	Front	0.297	0.114	0.062	0.005	0.411	0.359	0.302	0.364
	Rear	0.362	0.225	0.688	0.009	0.587	1.050	0.371	1.059
Hotspot	Front	0.536	0.197	0.138	0.012	0.733	0.674	0.549	0.687
	Rear	0.734	0.484	1.198	0.041	1.218	1.932	0.775	1.973
	Left	0.528	0.237	0.196	0.012	0.765	0.724	0.539	0.735
	Right	0.087	-	-	-	0.087	0.087	0.087	0.087
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.240	-	-	-	0.240	0.240	0.240	0.240

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (96) of (323)



Exposure Condition /Position		licensed	WLAN		Bluetooth	Summation			
			2.4 GHz	5 GHz		[①+②]	[①+③]	[①+④]	[①+③+④]
		[①]	[②]	[③]	[④]	[①+②]	[①+③]	[①+④]	[①+③+④]
LTE Band 4									
Head	Right Cheek	0.216	0.151	0.466	0.071	0.367	0.683	0.287	0.753
	Right Tilt	0.179	0.123	0.519	0.038	0.302	0.699	0.218	0.737
	Left Cheek	0.409	0.066	0.335	0.059	0.475	0.743	0.468	0.802
	Left Tilt	0.221	0.056	0.438	0.018	0.277	0.659	0.239	0.677
Body-Worn	Front	0.374	0.114	0.062	0.005	0.488	0.436	0.379	0.441
	Rear	0.405	0.225	0.688	0.009	0.630	1.093	0.414	1.102
Hotspot	Front	0.628	0.197	0.138	0.012	0.825	0.766	0.640	0.778
	Rear	0.742	0.484	1.198	0.041	1.226	1.939	0.783	1.981
	Left	0.656	0.237	0.196	0.012	0.893	0.852	0.668	0.864
	Right	0.083	-	-	-	0.083	0.083	0.083	0.083
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.359	-	-	-	0.359	0.359	0.359	0.359
LTE Band 5									
Head	Right Cheek	0.220	0.151	0.466	0.071	0.371	0.687	0.291	0.757
	Right Tilt	0.120	0.123	0.519	0.038	0.243	0.639	0.158	0.678
	Left Cheek	0.164	0.066	0.335	0.059	0.230	0.498	0.223	0.557
	Left Tilt	0.095	0.056	0.438	0.018	0.151	0.533	0.113	0.551
Body-Worn	Front	0.181	0.114	0.062	0.005	0.295	0.243	0.185	0.247
	Rear	0.320	0.225	0.688	0.009	0.545	1.008	0.328	1.016
Hotspot	Front	0.171	0.197	0.138	0.012	0.368	0.309	0.183	0.321
	Rear	0.544	0.484	1.198	0.041	1.028	1.741	0.585	1.783
	Left	0.139	0.237	0.196	0.012	0.376	0.335	0.151	0.347
	Right	0.265	-	-	-	0.265	0.265	0.265	0.265
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.101	-	-	-	0.101	0.101	0.101	0.101

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (97) of (323)



Exposure Condition /Position	licensed	WLAN		Bluetooth	Summation				
		2.4 GHz	5 GHz		[①+②]	[①+③]	[①+④]	[①+③+④]	
	[①]	[②]	[③]	[④]	[①+②]	[①+③]	[①+④]	[①+③+④]	
LTE Band 12									
Head	Right Cheek	0.093	0.151	0.466	0.071	0.244	0.560	0.164	0.630
	Right Tilt	0.057	0.123	0.519	0.038	0.180	0.576	0.095	0.615
	Left Cheek	0.079	0.066	0.335	0.059	0.145	0.414	0.138	0.473
	Left Tilt	0.052	0.056	0.438	0.018	0.108	0.490	0.070	0.508
Body-Worn	Front	0.061	0.114	0.062	0.005	0.175	0.123	0.066	0.128
	Rear	0.166	0.225	0.688	0.009	0.391	0.855	0.175	0.863
Hotspot	Front	0.074	0.197	0.138	0.012	0.271	0.212	0.086	0.224
	Rear	0.281	0.484	1.198	0.041	0.765	1.479	0.322	1.520
	Left	0.091	0.237	0.196	0.012	0.328	0.287	0.103	0.299
	Right	0.135	-	-	-	0.135	0.135	0.135	0.135
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.038	-	-	-	0.038	0.038	0.038	0.038
LTE Band 13									
Head	Right Cheek	0.056	0.151	0.466	0.071	0.207	0.522	0.126	0.593
	Right Tilt	0.030	0.123	0.519	0.038	0.153	0.549	0.068	0.588
	Left Cheek	0.034	0.066	0.335	0.059	0.100	0.369	0.093	0.428
	Left Tilt	0.028	0.056	0.438	0.018	0.084	0.466	0.046	0.484
Body-Worn	Front	0.046	0.114	0.062	0.005	0.160	0.108	0.051	0.113
	Rear	0.210	0.225	0.688	0.009	0.435	0.898	0.219	0.907
Hotspot	Front	0.072	0.197	0.138	0.012	0.269	0.210	0.084	0.222
	Rear	0.462	0.484	1.198	0.041	0.946	1.660	0.503	1.701
	Left	0.084	0.237	0.196	0.012	0.321	0.280	0.095	0.291
	Right	0.087	-	-	-	0.087	0.087	0.087	0.087
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.113	-	-	-	0.113	0.113	0.113	0.113

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (98) of (323)



Exposure Condition /Position	licensed	WLAN		Bluetooth	Summation				
		2.4 GHz	5 GHz		[①+②]	[①+③]	[①+④]	[①+③+④]	
	[①]	[②]	[③]	[④]	[①+②]	[①+③]	[①+④]	[①+③+④]	
LTE Band 17									
Head	Right Cheek	0.080	0.151	0.466	0.071	0.231	0.547	0.151	0.618
	Right Tilt	0.047	0.123	0.519	0.038	0.170	0.567	0.086	0.605
	Left Cheek	0.082	0.066	0.335	0.059	0.148	0.417	0.141	0.476
	Left Tilt	0.051	0.056	0.438	0.018	0.107	0.489	0.069	0.507
Body-Worn	Front	0.077	0.114	0.062	0.005	0.191	0.139	0.082	0.144
	Rear	0.163	0.225	0.688	0.009	0.388	0.851	0.171	0.859
Hotspot	Front	0.083	0.197	0.138	0.012	0.280	0.221	0.096	0.234
	Rear	0.288	0.484	1.198	0.041	0.772	1.485	0.329	1.527
	Left	0.101	0.237	0.196	0.012	0.338	0.297	0.113	0.309
	Right	0.132	-	-	-	0.132	0.132	0.132	0.132
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.044	-	-	-	0.044	0.044	0.044	0.044
LTE Band 26									
Head	Right Cheek	0.187	0.151	0.466	0.071	0.338	0.654	0.258	0.725
	Right Tilt	0.132	0.123	0.519	0.038	0.255	0.651	0.170	0.689
	Left Cheek	0.165	0.066	0.335	0.059	0.231	0.500	0.224	0.559
	Left Tilt	0.097	0.056	0.438	0.018	0.153	0.535	0.115	0.553
Body-Worn	Front	0.142	0.114	0.062	0.005	0.256	0.204	0.146	0.208
	Rear	0.292	0.225	0.688	0.009	0.517	0.980	0.300	0.988
Hotspot	Front	0.160	0.197	0.138	0.012	0.357	0.298	0.172	0.310
	Rear	0.402	0.484	1.198	0.041	0.886	1.600	0.443	1.641
	Left	0.184	0.237	0.196	0.012	0.421	0.380	0.195	0.392
	Right	0.235	-	-	-	0.235	0.235	0.235	0.235
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.081	-	-	-	0.081	0.081	0.081	0.081

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (99) of (323)



Exposure Condition /Position	licensed	WLAN		Bluetooth	Summation				
		2.4 GHz	5 GHz		[①+②]	[①+③]	[①+④]	[①+③+④]	
	[①]	[②]	[③]	[④]	[①+②]	[①+③]	[①+④]	[①+③+④]	
LTE Band 41									
Head	Right Cheek	0.076	0.151	0.466	0.071	0.227	0.542	0.146	0.613
	Right Tilt	0.084	0.123	0.519	0.038	0.207	0.603	0.122	0.642
	Left Cheek	0.107	0.066	0.335	0.059	0.173	0.441	0.165	0.500
	Left Tilt	0.037	0.056	0.438	0.018	0.093	0.475	0.055	0.493
Body-Worn	Front	0.121	0.114	0.062	0.005	0.235	0.183	0.126	0.188
	Rear	0.260	0.225	0.688	0.009	0.485	0.948	0.269	0.957
Hotspot	Front	0.136	0.197	0.138	0.012	0.333	0.274	0.148	0.286
	Rear	0.536	0.484	1.198	0.041	1.020	1.733	0.577	1.775
	Left	0.131	0.237	0.196	0.012	0.368	0.327	0.143	0.339
	Right	0.015	-	-	-	0.015	0.015	0.015	0.015
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.207	-	-	-	0.207	0.207	0.207	0.207
LTE Band 66									
Head	Right Cheek	0.181	0.151	0.466	0.071	0.332	0.648	0.252	0.718
	Right Tilt	0.147	0.123	0.519	0.038	0.270	0.666	0.185	0.705
	Left Cheek	0.353	0.066	0.335	0.059	0.419	0.687	0.412	0.746
	Left Tilt	0.213	0.056	0.438	0.018	0.269	0.651	0.231	0.669
Body-Worn	Front	0.297	0.114	0.062	0.005	0.411	0.359	0.302	0.364
	Rear	0.311	0.225	0.688	0.009	0.536	0.999	0.319	1.007
Hotspot	Front	0.546	0.197	0.138	0.012	0.743	0.684	0.558	0.696
	Rear	0.683	0.484	1.198	0.041	1.167	1.881	0.724	1.922
	Left	0.626	0.237	0.196	0.012	0.863	0.823	0.638	0.834
	Right	0.074	-	-	-	0.074	0.074	0.074	0.074
	Top	-	0.122	1.077	0.004	0.122	1.077	0.004	1.081
	Bottom	0.353	-	-	-	0.353	0.353	0.353	0.353

Notes: Simultaneous transmission SAR test exclusion considerations

- Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Per KDB Publication 447498 D01v06.
- When the sum of SAR1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR1g 1.6 W/kg), the SPLSR procedures is not required. When the sum of SAR1g is greater than the SAR limit (SAR1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

This test report shall not be reproduced, except in full, without the written approval

12.2 SAR to Peak Location Separation Ratio Analysis

The simultaneous transmitting antennas in each operating mode and exposure condition combination are considered one pair at a time to determine the SPLSR. When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following formula.

$$\text{Peak Location Separation Distance} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

Where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the area or zoom scans.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location will be translated onto the test device to determine the peak location separation for the antenna pair.

The SPLSR is determined by the following formula.

$$\text{SPLSR} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{R_i}$$

Where SAR_1 and SAR_2 are the highest reported or estimated SAR for each antenna in the pair, and R_i is the separation distance between the peak SAR locations for the antenna pair in mm.

When the SPLSR is ≤ 0.04 , the simultaneous transmission SAR is not required. Otherwise, the enlarged zoom scan and volume scan post-processing procedures will be performed.

Nov. 2019 TCB Workshop (SPLSR Hotspot Combination)

For devices whose simultaneous SAR is > 1.6 W/kg and who do not meet the SPLSR criteria, enlarged zoom scan/volume scan procedure is available.

This procedure can be quite time consuming, especially for devices where antennas are spatially separated.

Often needed only because one co-located antenna pair does not meet SPLSR.

Hybrid SPLSR and enlarged zoom scan/volume scan approach now being considered.

Can only be applied when simultaneous transmission SAR is > 1.6 W/kg, it does not meet SPLSR criteria, and antenna pair is co-located.

The Hybrid SPLSR was performed according to the following Test Procedure:

step1) Perform enlarged zoom scan/volume scan on the co-located antenna pair to determine 1g/10g aggregate SAR

Step2) Apply SPLSR procedure for the spatially separated antenna and aggregate SAR distribution of the co-located antenna pair

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (101) of (323)



12.2.1 Maximum Simultaneous Transmission Analysis

No	Band	Position	Maximum Standalone SAR [W/kg]			Sum [W/kg]	Volume Scan or SPLSR (Yes / No)
			licensed	5 GHz WLAN	Bluetooth		
1	GSM850	Rear	0.298	1.198	0.041	1.537	No
2	GSM1900	Rear	0.394	1.198	0.041	1.633	Yes
3	WCDMA II	Rear	0.724	1.198	0.041	1.963	Yes
4	WCDMA IV	Rear	0.666	1.198	0.041	1.905	Yes
5	WCDMA V	Rear	0.375	1.198	0.041	1.614	Yes
6	LTE Band 2	Rear	0.734	1.198	0.041	1.973	Yes
7	LTE Band 4	Rear	0.742	1.198	0.041	1.981	Yes
8	LTE Band 5	Rear	0.544	1.198	0.041	1.783	Yes
9	LTE Band 12	Rear	0.281	1.198	0.041	1.520	No
10	LTE Band 13	Rear	0.462	1.198	0.041	1.701	Yes
11	LTE Band 17	Rear	0.288	1.198	0.041	1.527	No
12	LTE Band 26	Rear	0.402	1.198	0.041	1.641	Yes
13	LTE Band 41	Rear	0.536	1.198	0.041	1.775	Yes
14	LTE Band 66	Rear	0.683	1.198	0.041	1.922	Yes

12.2.2 Volume Scan for Hybrid SPLSR(5 GHz WLAN and Bluetooth)

Date: 1/21/2020

Test Laboratory: KCTL Inc.

File Name: [3. 5.8G 802.11a Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, 5GWLAN (0); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.339$ S/m; $\epsilon_r = 35.508$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(4.7, 4.7, 4.7) @ 5745 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 a_CH149_Rear_10 mm Volume Scan/Volume Scan**(16x16x16):** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 0.817 W/kg; SAR(10 g) = 0.288 W/kg

Total Absorbed Power = 0.00677 W

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.93 W/kg

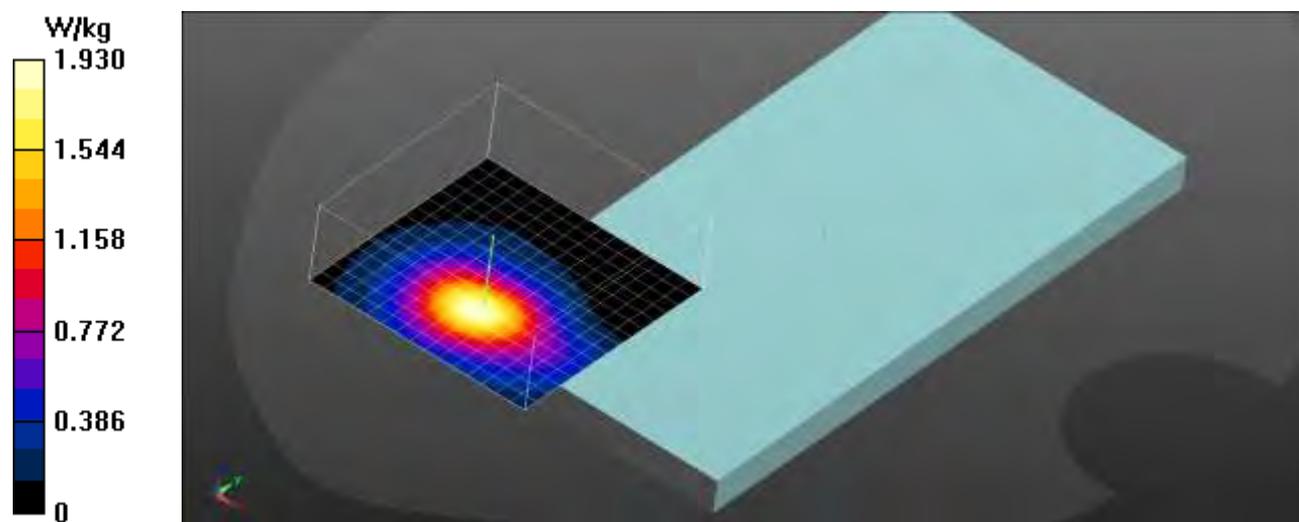

Date: 1/22/2020

Test Laboratory: KCTL Inc.

File Name: [6. Bluetooth GFSK DH1 Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, Bluetooth DH1 (0); Frequency: 2402 MHz; Duty Cycle: 1:3.43637
Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.746$ S/m; $\epsilon_r = 38.824$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(7.46, 7.46, 7.46) @ 2402 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/Bluetooth_GFSK_DH1_CH1_Rear_10 mm Volume/Volume Scan**(16x16x16):** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.00737 W/kg; SAR(10 g) = 0.00214 W/kg

Total Absorbed Power = 0.0000314 W

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0155 W/kg

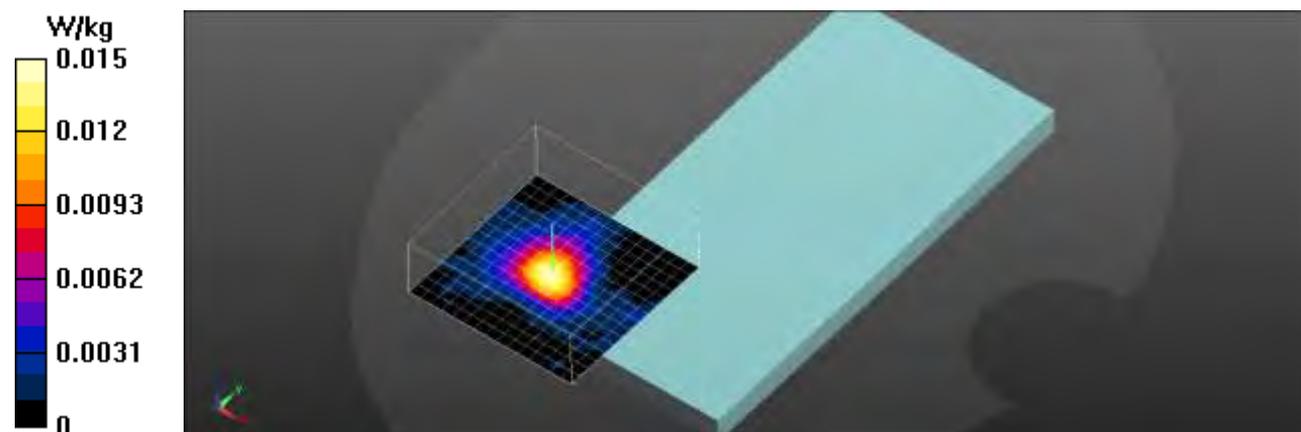

Exposure Condition	Mode	EUT Position	Distance (mm)	Freq. (MHz)	1g SAR (W/kg)	Volume Scan 1g SAR(W/kg)
Hotspot	802.11a	Rear	10	5 745.0	0.817	1.130
	Bluetooth	Rear	10	2 402.0	0.00737	

Multi-Band Average SAR


Multi-Band Configurations:

DASY Configuration for Configuration/802.11 a_CH149_Rear_10 mm Volume Scan/Volume Scan:

DASY Configuration for Configuration/Bluetooth_GFSK_DH1_CH1_Rear_10 mm Volume/Volume Scan:

Multi Band Result:

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.401 W/kg
 Maximum value of SAR (interpolated) = 4.37 W/kg

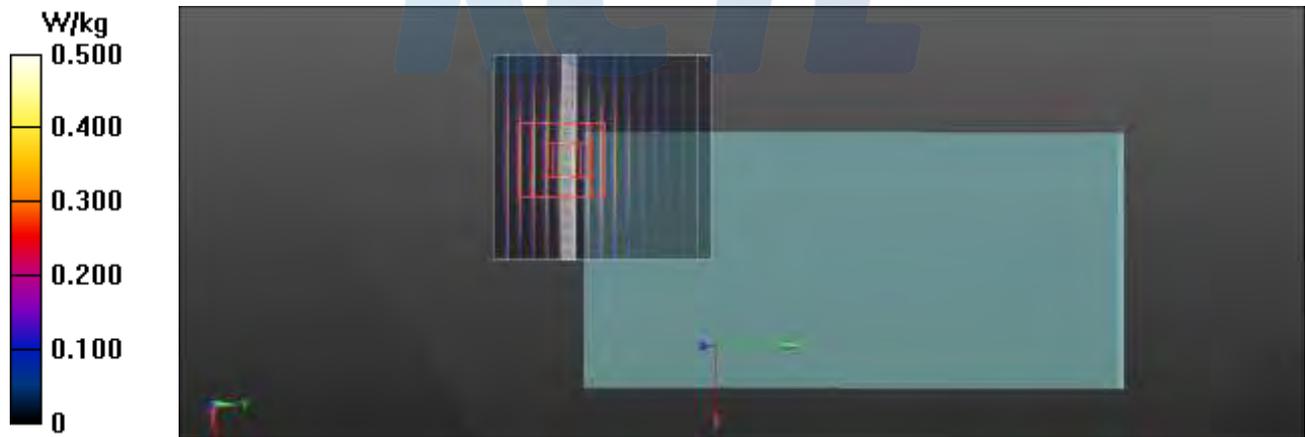

<Plot. Combine Average SAR 1g Result>

12.2.3 Hybrid SPLSR Analysis

No	Mode	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Tes
			X	Y	Z			
1								
	GSM1900	0.394	-31.6	62.4	-1.06	138.0	0.014	Not required (SPLSR ≤ 0.04),
	WLAN 5.8 GHz and Bluetooth	1.130	-19.0	-75.0	-1.09			
2								
	WCDMA II	0.724	-13.5	63.9	-1.24	139.0	0.018	Not required (SPLSR ≤ 0.04),
	WLAN 5.8 GHz and Bluetooth	1.130	-19.0	-75.0	-1.09			

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (106) of (323)



No	Mode	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Tes
3								
	WCDMA IV	0.666	-23.9	65.4	-1.12	140.5	0.017	Not required (SPLSR ≤ 0.04),
	WLAN 5.8 GHz and Bluetooth	1.130	-19.0	-75.0	-1.09			
4								
	WCDMA V	0.375	7.4	-6.3	-1.32	73.6	0.025	Not required (SPLSR ≤ 0.04),
	WLAN 5.8 GHz and Bluetooth	1.130	-19.0	-75.0	-1.09			

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (107) of (323)



No	Mode	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Tes
5								
	LTE Band 2	0.734	-30.1	65.4	-1.3	140.8	0.018	Not required (SPLSR ≤ 0.04),
	WLAN 5.8 GHz and Bluetooth	1.130	-19.0	-75.0	-1.09			
6								
	LTE Band 4	0.742	-27	63.8	-1.02	139.0	0.018	Not required (SPLSR ≤ 0.04),
	WLAN 5.8 GHz and Bluetooth	1.130	-19.0	-75.0	-1.09			

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (108) of (323)



No	Mode	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Test
7								
	LTE Band 5	0.544	1.5	67.4	-1.08	143.9	0.015	Not required (SPLSR ≤ 0.04),
	WLAN 5.8 GHz and Bluetooth	1.130	-19.0	-75.0	-1.09			
8								
	LTE Band 13	0.462	-2.8	75	-2.59	150.9	0.013	Not required (SPLSR ≤ 0.04),
	WLAN 5.8 GHz and Bluetooth	1.130	-19.0	-75.0	-1.09			

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (109) of (323)



No	Mode	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Tes
9								
	LTE Band 26	0.402	0	68.9	-1.14	145.1	0.013	Not required (SPLSR ≤ 0.04),
	WLAN 5.8 GHZ and Bluetooth	1.130	-19.0	-75.0	-1.09			
10								
	LTE Band 41	0.536	-32	69.8	-0.81	145.4	0.015	Not required (SPLSR ≤ 0.04),
	WLAN 5.8 GHZ and Bluetooth	1.130	-19.0	-75.0	-1.09			


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (110) of (323)



No	Mode	SAR Value (W/kg)	Coordinates			Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Tes
11								
	LTE Band 66	0.683	-27	63.8	-1.09	139.0	0.018	Not required (SPLSR ≤ 0.04),
	WLAN 5.8 GHz and Bluetooth	1.130	-19.0	-75.0	-1.09			

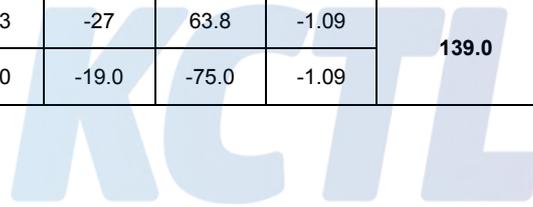

13. SAR Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg.
- 2) **When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.**
- 3) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

RF Exposure Conditions	Band	Mode	Frequency (MHz)	EUT Position	Separation Distance (mm)	Measured 1 g SAR (W/kg)	Repeated 1g SAR (W/kg)	Ratio
Hotspot	U-NII-3	802.11a	5 745.0	Rear	10	0.861	0.738	1.17

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (112) of (323)

KCTL**14. Measurement Uncertainty**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Standard 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

KCTL

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (113) of (323)



15. Test Equipment Information

Test Platform	SPEAG DASY5 System			
Version	DASY52: 52.10.3.1513 / SEMCAD: 14.6.13 (7474)			
Location	KCTL Inc, 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea			
Manufacture	SPEAG			
Hardware Reference				
Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Shield Room	-	8F - #1	-	-
Shield Room	-	8F - #2	-	-
Shield Room	-	8F - #3	-	-
DASY5 Robot	TX90XL	F12/5L7FA1/A/01	-	-
DASY5 Robot	TX90XL speag	F07/554JA1/A/01	-	-
DASY6 Robot	TX90XL speag	F/18/0004968/A/001	-	-
Phantom	Twin SAM Phantom	1724	-	-
Phantom	Twin SAM Phantom	1363	-	-
Phantom	Twin SAM Phantom	1974	-	-
Phantom	Twin SAM Phantom	1975	-	-
Mounting Device	Mounting Device	-	-	-
DAE	DAE4	1342	2019-05-23	2020-05-23
DAE	DAE4	1567	2019-02-05	2020-02-05
DAE	DAE4	666	2019-01-25	2020-01-25
DAE	DAE4	1586	2019-07-16	2020-07-16
Probe	EX3DV4	3697	2019-03-28	2020-03-28
Probe	EX3DV4	3865	2019-08-28	2020-08-28
Probe	EX3DV4	7540	2019-07-22	2020-07-22
ESG Vector Signal Generator	E4438C	MY42080845	2019-03-04	2020-03-04
ESG Vector Signal Generator	E4438C	MY42080486	2019-05-13	2020-05-13
Dual Power Meter	E4419B	GB43312301	2019-05-13	2020-05-13
Dual Power Meter	EPM-442A	GB37480680	2019-06-20	2020-06-20
Power Sensor	8481H	3318A 19379	2019-05-13	2020-05-13
Power Sensor	8481H	3318A 19377	2019-05-13	2020-05-13
Power Sensor	8481H	2703A11902	2019-06-26	2020-06-26
Power Sensor	8481H	3318A18090	2019-06-21	2020-06-21
Attenuator	8491B 3dB	17387	2019-05-13	2020-05-13
Attenuator	8491B 10dB	29425	2019-05-13	2020-05-13
Attenuator	8491B-6dB	MY39270294	2019-05-13	2020-05-13
Attenuator	8491A	21552	2019-07-01	2020-07-01
Attenuator	8491A	35560	2019-07-01	2020-07-01

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (114) of (323)



Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Attenuator	8491A	35934	2019-07-01	2020-07-01
Power Amplifier	GRF5039	1062	2019-05-14	2020-05-14
Power Amplifier	2055-BBS3Q7E9I	1005D/C0521	2019-03-08	2020-03-08
Power Amplifier	AMP2027	10010	2019-07-17	2020-07-17
Dual Directional Coupler	778D	16059	2019-05-13	2020-05-13
Dual Directional Coupler	772D	2839A00719	2019-05-13	2020-05-13
Dual Directional Coupler	778D-012	50136	2019-06-21	2020-06-21
Dual Directional Coupler	772D	2839A160504	2019-06-21	2020-06-21
Low Pass Filter	LA-15N	36543	2019-05-13	2020-05-13
Low Pass Filter	LA-30N	40058	2019-05-13	2020-05-13
Low Pass Filter	VLF-1500+	31835	2019-07-01	2020-07-01
Low Pass Filter	VLF-3000+	31831	2019-07-01	2020-07-01
Low Pass Filter	VLF-6000+	31838	2019-07-02	2020-07-02
Dipole Validation Kits	D750V3	1183	2018-09-03	2020-09-03
Dipole Validation Kits	D850V2	1006	2018-04-20	2020-04-20
Dipole Validation Kits	D1750V2	1072	2018-04-19	2020-04-19
Dipole Validation Kits	D1900V2	5d160	2018-04-25	2020-04-25
Dipole Validation Kits	D2450V2	895	2018-07-24	2020-07-24
Dipole Validation Kits	D2600V2	1050	2018-07-26	2020-07-26
Dipole Validation Kits	D5GHzV2	1134	2019-05-23	2021-05-23
Network Analyzer	E5071B	MY42403524	2020-01-03	2021-01-03
Dielectric Assessment Kit	DAK-3.5	1078	2019-05-22	2020-05-22
Humidity/Temp.	MHB-382SD	73871	2019-05-16	2020-05-16
Humidity/Temp.	MHB-382SD	23107	2019-05-16	2020-05-16
Humidity/Temp.	MHB-382SD	46307	2019-04-10	2020-04-10
Spectrum Analyzer	FSP7	100289	2020-01-03	2021-01-03
Radio Communication Tester	CMU200	106191	2019-05-14	2020-05-14
Wideband Radio Communication Tester	CMW500	132423	2019-04-10	2020-04-10
Wideband Radio Communication Tester	CMW500	137524	2019-07-17	2020-07-17
Bluetooth Tester	TC-3000B	3000B640056	2020-01-21	2021-01-21

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIA002-004/2

16. Test System Verification Results


Date: 2020-01-13

Test Laboratory: KCTL Inc.

File Name: [750 MHz Verification Input Power 250 mW 2020-01-13.da52:0](#)**DUT: Dipole 750 MHz D750V3, Type: D750V3, Serial: D750V3 - SN:1183**Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 43.563$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(9, 9, 9) @ 750 MHz; ; Calibrated: 2019-03-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: SAM twin SN1724; Type: QD000P40CD; Serial: TP:1724
- Measurement SW: DASY52, Version 52.10 (3);

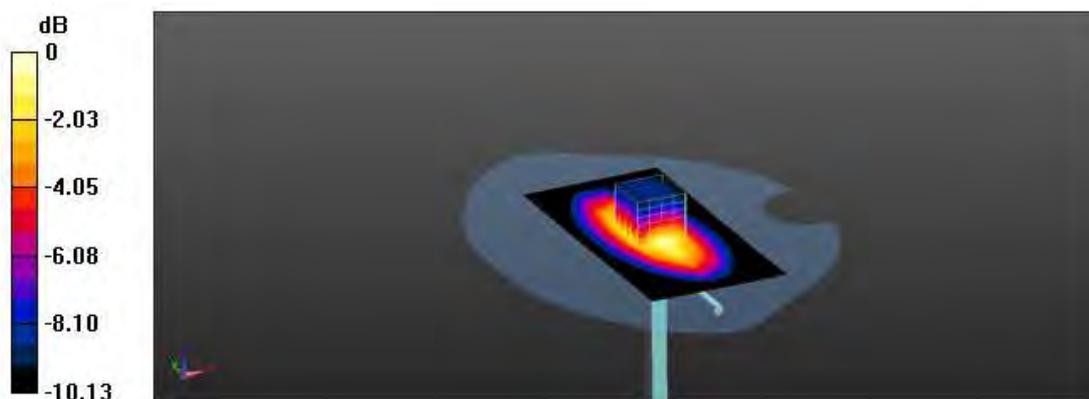System Performance Check (without Area Scan)/750 MHz Verification Input Power 250 mW 2020-01-13/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.77 W/kg**System Performance Check (without Area Scan)/750 MHz Verification Input Power 250 mW 2020-01-13/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 58.92 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 3.23 W/kg
SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.44 W/kg
Smallest distance from peaks to all points 3 dB below = 17.2 mm
Ratio of SAR at M2 to SAR at M1 = 66.7%
Maximum value of SAR (measured) = 2.87 W/kg

0 dB = 2.87 W/kg = 4.58 dBW/kg

Date: 2020-01-14

Test Laboratory: KCTL Inc.

File Name: [750 MHz Verification Input Power 250 mW 2020-01-14.da52:0](#)**DUT: Dipole 750 MHz D750V3, Type: D750V3, Serial: D750V3 - SN:1183**Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.608$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(9, 9, 9) @ 750 MHz; ; Calibrated: 2019-03-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: SAM twin SN1724; Type: QD000P40CD; Serial: TP:1724
- Measurement SW: DASY52, Version 52.10 (3);

System Performance Check (without Area Scan)/750 MHz Verification Input Power 250 mW 2020-01-14/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.82 W/kg**System Performance Check (without Area Scan)/750 MHz Verification Input Power 250 mW 2020-01-14/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.94 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 3.26 W/kg

SAR(1 g) = 2.17 W/kg; SAR(10 g) = 1.44 W/kg

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 66.5%

Maximum value of SAR (measured) = 2.90 W/kg

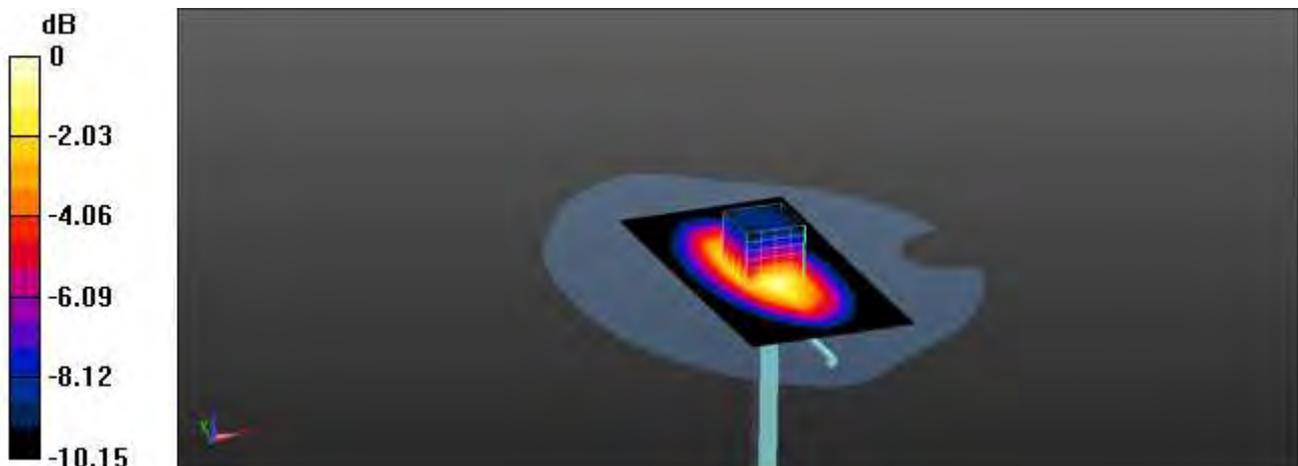

0 dB = 2.90 W/kg = 4.62 dBW/kg

Date: 1/13/2020

Test Laboratory: KCTL Inc.

File Name: [850 MHz Verification Input Power 250 mW 2020-01-13.da52:0](#)**DUT: Dipole 850 MHz D850V2, Type: D850V2, Serial: D850V2 - SN:1006**Communication System: UID 0, CW (0); Frequency: 850 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 850$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.127$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.43, 9.43, 9.43) @ 850 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

System Performance Check (without Area Scan)/850 MHz Verification Input Power 250 mW 2020-01-13/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 3.21 W/kg**System Performance Check (without Area Scan)/850 MHz Verification Input Power 250 mW 2020-01-13/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 61.56 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.61 W/kg

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 66.5%

Maximum value of SAR (measured) = 3.29 W/kg

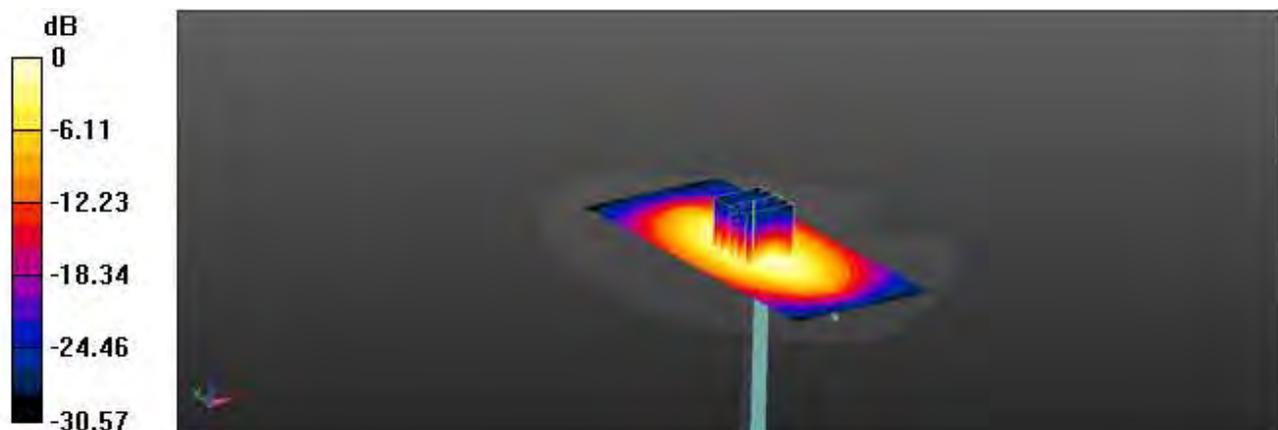

0 dB = 3.21 W/kg = 5.07 dBW/kg

Date: 1/14/2020

Test Laboratory: KCTL Inc.

File Name: [850 MHz Verification Input Power 250 mW 2020-01-14.da52:0](#)**DUT: Dipole 850 MHz D850V2, Type: D850V2, Serial: D850V2 - SN:1006**Communication System: UID 0, CW (0); Frequency: 850 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 850$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.52$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.43, 9.43, 9.43) @ 850 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

System Performance Check (without Area Scan)/850 MHz Verification Input Power 250 mW 2020-01-14/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 3.26 W/kg**System Performance Check (without Area Scan)/850 MHz Verification Input Power 250 mW 2020-01-14/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 62.05 V/m; Power Drift = 0.00 dB



Peak SAR (extrapolated) = 3.76 W/kg

SAR(1 g) = 2.5 W/kg; SAR(10 g) = 1.63 W/kg

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.2%

Maximum value of SAR (measured) = 3.35 W/kg

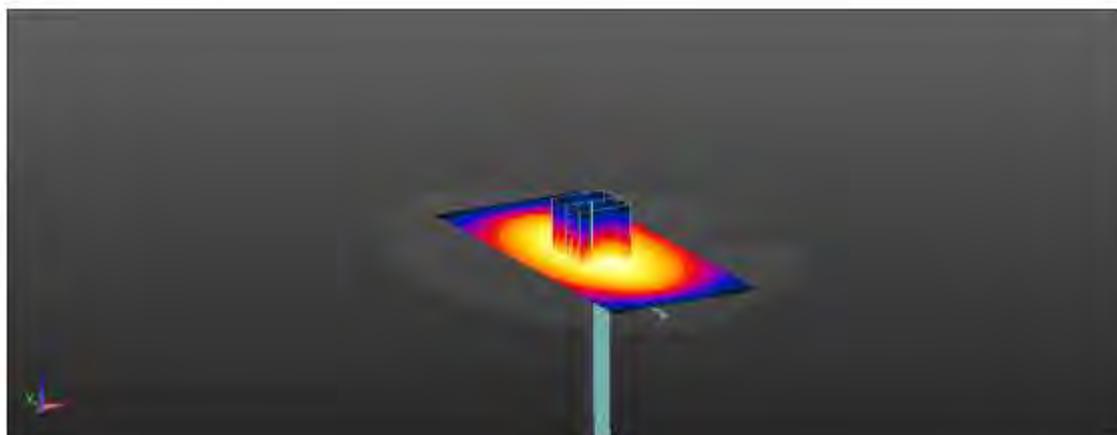

0 dB = 3.26 W/kg = 5.13 dBW/kg



Date: 1/8/2020

Test Laboratory: KCTL Inc.

File Name: [1750 MHz Verification Input Power 250 mW 2020-01-08.da52:0](#)**DUT: Dipole 1750 MHz D1750V2, Type: D1750V2, Serial: D1750V2 - SN:1072**Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1750$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 38.824$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.48, 8.48, 8.48) @ 1750 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

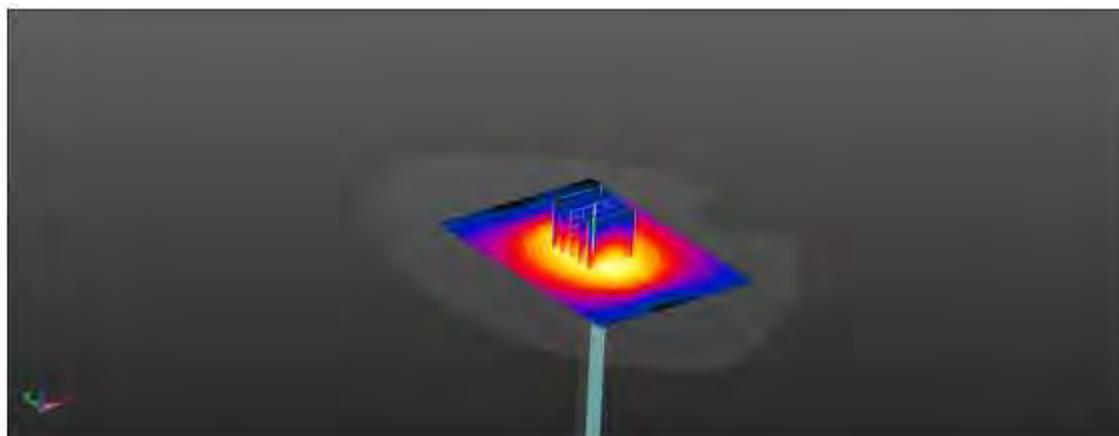System Performance Check (without Area Scan)/1750 MHz Verification Input Power 250 mW 2020-01-08/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 11.5 W/kg**System Performance Check (without Area Scan)/1750 MHz Verification Input Power 250 mW 2020-01-08/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 102.6 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 17.2 W/kg
SAR(1 g) = 9.05 W/kg; SAR(10 g) = 4.72 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 52.1%
Maximum value of SAR (measured) = 14.3 W/kg

0 dB = 11.5 W/kg = 10.61 dBW/kg



Date: 1/9/2020

Test Laboratory: KCTL Inc.

File Name: [1750 MHz Verification Input Power 250 mW 2020-01-09.da52:0](#)**DUT: Dipole 1750 MHz D1750V2, Type: D1750V2, Serial: D1750V2 - SN:1072**Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1750$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 39.069$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.48, 8.48, 8.48) @ 1750 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

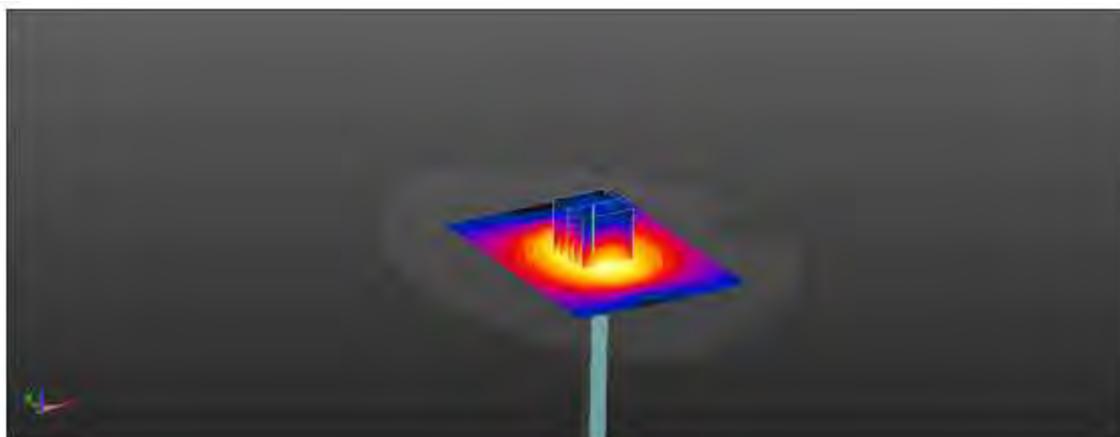System Performance Check (without Area Scan)/1750 MHz Verification Input Power 250 mW 2020-01-09/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 11.7 W/kg**System Performance Check (without Area Scan)/1750 MHz Verification Input Power 250 mW 2020-01-09/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 103.8 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 17.5 W/kg
SAR(1 g) = 9.26 W/kg; SAR(10 g) = 4.83 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 52.2%
Maximum value of SAR (measured) = 14.6 W/kg


Date: 1/6/2020

Test Laboratory: KCTL Inc.

File Name: [1900 MHz Verification Input Power 250 mW 2020-01-06.da52:0](#)**DUT: Dipole 1900 MHz D1900V2, Type: D1900V2, Serial: D1900V2 - SN:5d160**Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.584$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(8.13, 8.13, 8.13) @ 1900 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

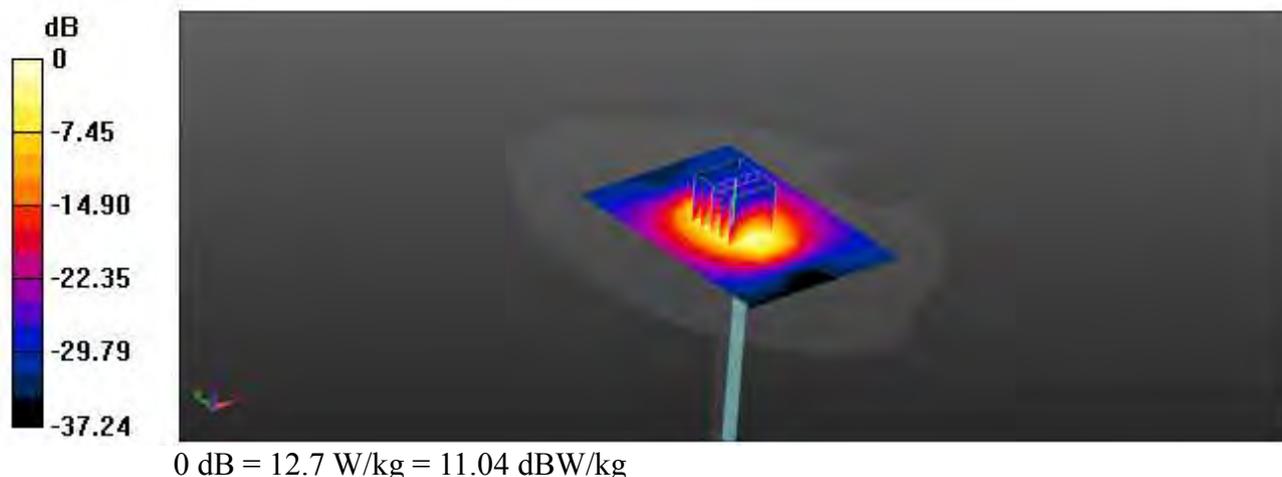System Performance Check (without Area Scan)/1900 MHz Verification Input Power 250 mW 2020-01-06/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 12.7 W/kg**System Performance Check (without Area Scan)/1900 MHz Verification Input Power 250 mW 2020-01-06/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 104.5 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 18.9 W/kg
SAR(1 g) = 9.51 W/kg; SAR(10 g) = 4.78 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 49.9%
Maximum value of SAR (measured) = 15.3 W/kg


Date: 1/7/2020

Test Laboratory: KCTL Inc.

File Name: [1900 MHz Verification Input Power 250 mW 2020-01-07.da52:0](#)**DUT: Dipole 1900 MHz D1900V2, Type: D1900V2, Serial: D1900V2 - SN:5d160**Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.586$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.13, 8.13, 8.13) @ 1900 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

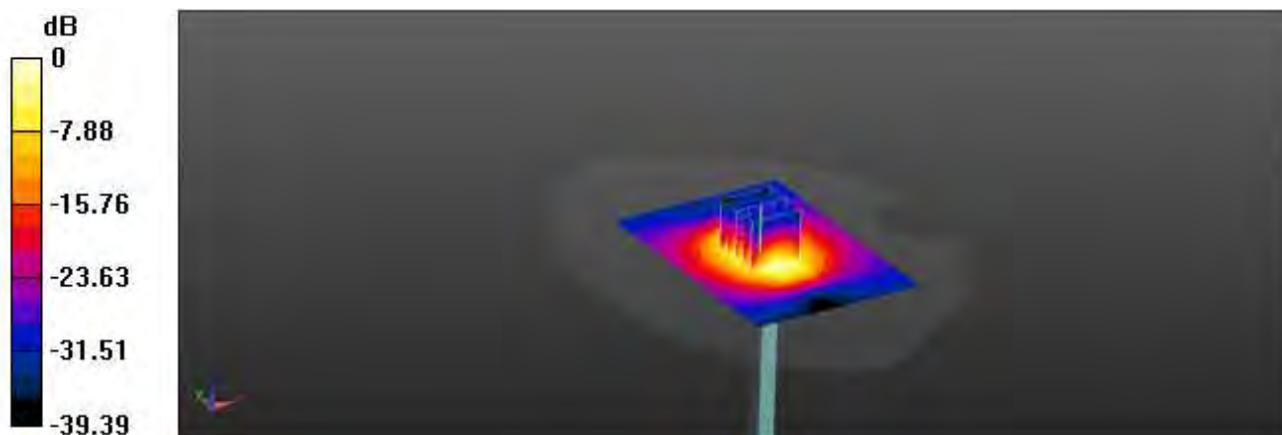System Performance Check (without Area Scan)/1900 MHz Verification Input Power 250 mW 2020-01-07/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 12.9 W/kg**System Performance Check (without Area Scan)/1900 MHz Verification Input Power 250 mW 2020-01-07/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 105.9 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 19.0 W/kg
SAR(1 g) = 9.61 W/kg; SAR(10 g) = 4.85 W/kg
Smallest distance from peaks to all points 3 dB below = 10.1 mm
Ratio of SAR at M2 to SAR at M1 = 50%
Maximum value of SAR (measured) = 15.4 W/kg

0 dB = 12.9 W/kg = 11.11 dBW/kg

Date: 1/22/2020

Test Laboratory: KCTL Inc.

File Name: [2450 MHz Verification Input Power 100 mW 2020-01-22.da52:0](#)**DUT: Dipole 2450 MHz D2450V2, Type: D2450V2, Serial: D2450V2 - SN:895**Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 38.67$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(7.46, 7.46, 7.46) @ 2450 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

System Performance Check (without Area Scan)/2450 MHz Verification Input Power 100 mW 2020-01-22/Area Scan (9x12x1): Measurement grid: dx=12mm, dy=12mmInfo: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 7.85 W/kg

System Performance Check (without Area Scan)/2450 MHz Verification Input Power 100 mW 2020-01-22/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 71.59 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 12.0 W/kg


SAR(1 g) = 5.18 W/kg; SAR(10 g) = 2.3 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 42.3%

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 9.26 W/kg

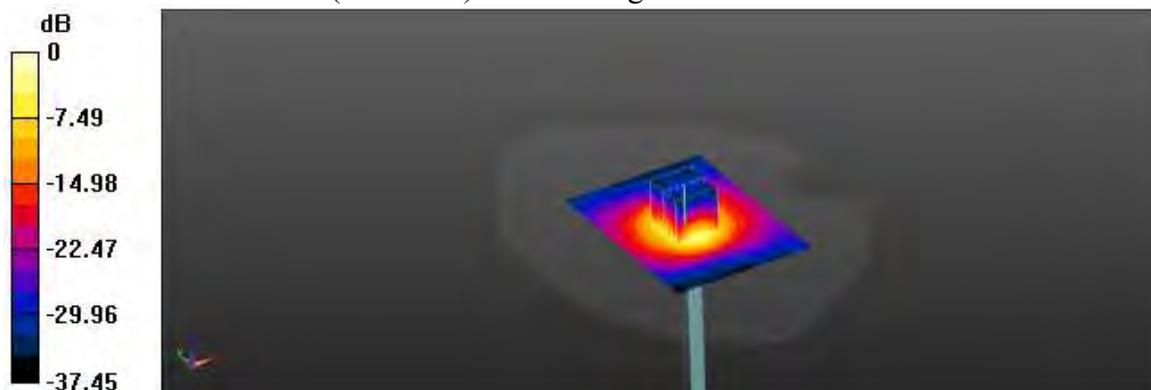

0 dB = 7.85 W/kg = 8.95 dBW/kg

This test report shall not be reproduced, except in full, without the written approval

Date: 2020-01-09

Test Laboratory: KCTL Inc.

File Name: [2600 MHz Verification Input Power 100 mW 2020-01-09.da5:0](#)**DUT: Dipole 2600 MHz D2600V2, Type: D2600V2, Serial: D2600V2 - SN:1050**Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 38.575$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(7.68, 7.68, 7.68) @ 2600 MHz; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1567; Calibrated: 2019-02-05
- Phantom: Twin-SAM V4.0 #1; Type: QD 000 P40 CC; Serial: 1363
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/2600 MHz Verification Input Power 100 mW 2020-01-09/Area Scan (10x11x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 8.75 W/kg

Configuration/2600 MHz Verification Input Power 100 mW 2020-01-09/Zoom Scan**(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 64.60 V/m; Power Drift = 0.89 dB


Peak SAR (extrapolated) = 13.0 W/kg

SAR(1 g) = 5.45 W/kg; SAR(10 g) = 2.31 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 41.1%

Maximum value of SAR (measured) = 9.71 W/kg

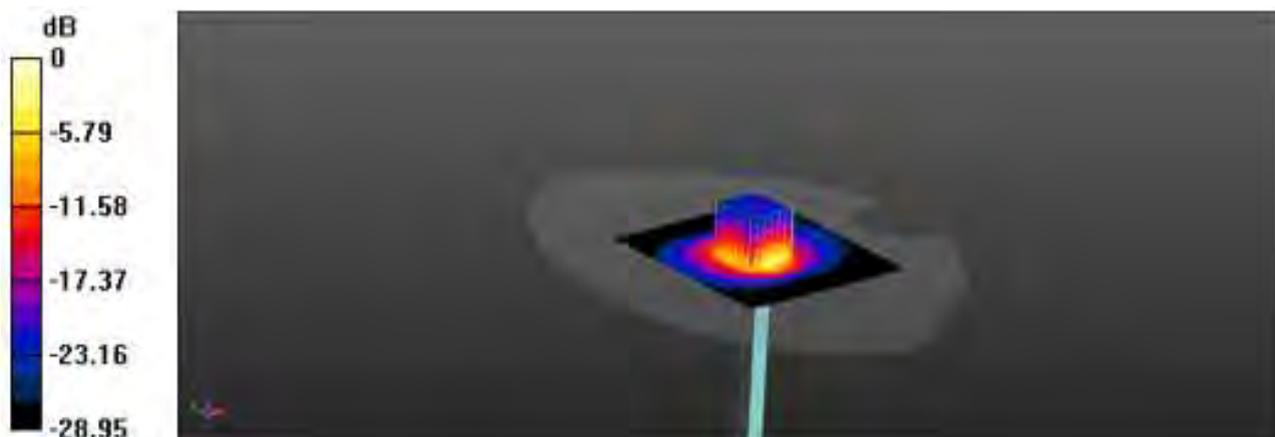

0 dB = 9.71 W/kg = 9.87 dBW/kg

Date: 1/17/2020

Test Laboratory: KCTL Inc.

File Name: [5300 MHz Verification Input Power 100 mW 2020-01-17.da52:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134**

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5300$ MHz; $\sigma = 4.882$ S/m; $\epsilon_r = 35.858$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(5.15, 5.15, 5.15) @ 5300 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

System Performance Check (without Area Scan)/5300 MHz Verification Input Power 100 mW 2020-01-17/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 16.0 W/kg

System Performance Check (without Area Scan)/5300 MHz Verification Input Power 100 mW 2020-01-17/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.03 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 34.6 W/kg


SAR(1 g) = 7.9 W/kg; SAR(10 g) = 2.27 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 61.8%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 20.7 W/kg

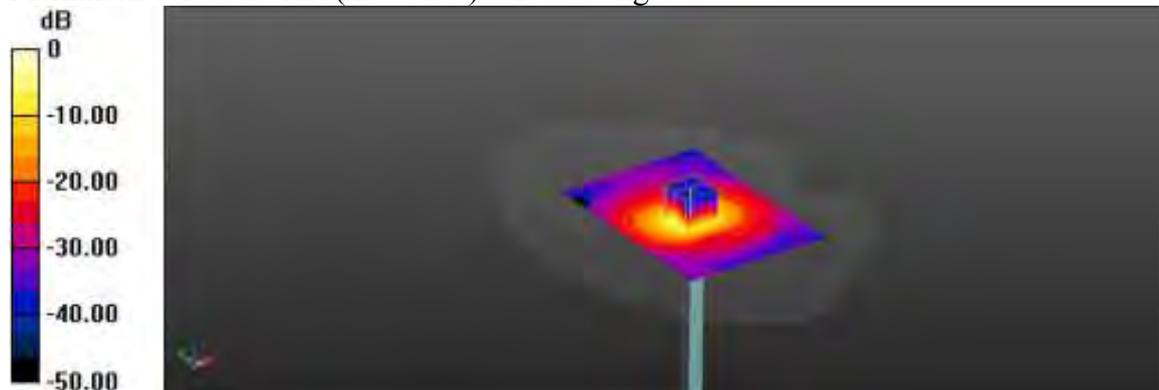

0 dB = 16.0 W/kg = 12.04 dBW/kg


Date: 1/20/2020

Test Laboratory: KCTL Inc.

File Name: [5600 MHz Verification Input Power 100 mW 2020-01-20.da52:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134**Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.236$ S/m; $\epsilon_r = 35.563$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(4.61, 4.61, 4.61) @ 5600 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

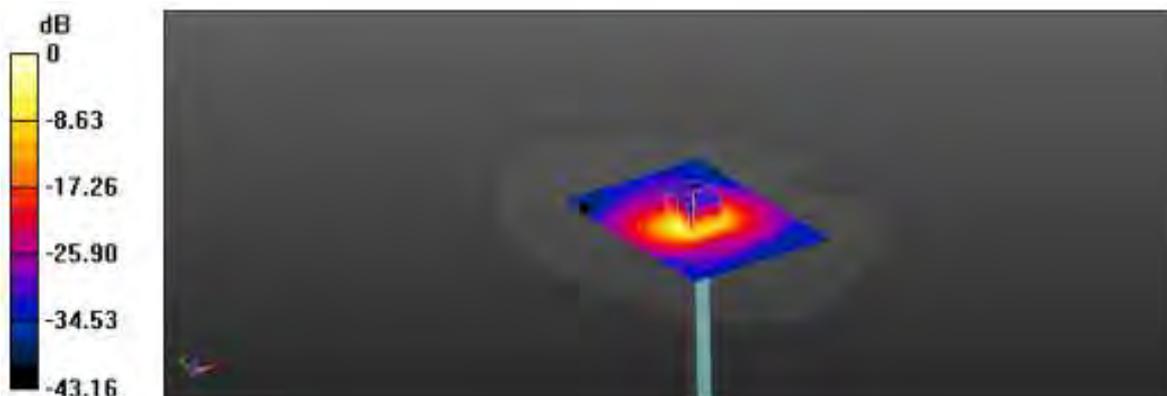System Performance Check (without Area Scan)/5600 MHz Verification Input Power 100 mW 2020-01-20/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 16.5 W/kg**System Performance Check (without Area Scan)/5600 MHz Verification Input Power 100 mW 2020-01-20/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 62.13 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 37.2 W/kg
SAR(1 g) = 8.41 W/kg; SAR(10 g) = 2.4 W/kg
Smallest distance from peaks to all points 3 dB below = 7.4 mm
Ratio of SAR at M2 to SAR at M1 = 61.9%
Maximum value of SAR (measured) = 22.3 W/kg

0 dB = 16.5 W/kg = 12.17 dBW/kg


Date: 1/21/2020

Test Laboratory: KCTL Inc.

File Name: [5800 MHz Verification Input Power 100 mW 2020-01-21.da52:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1134**Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.454$ S/m; $\epsilon_r = 35.215$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(4.7, 4.7, 4.7) @ 5800 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

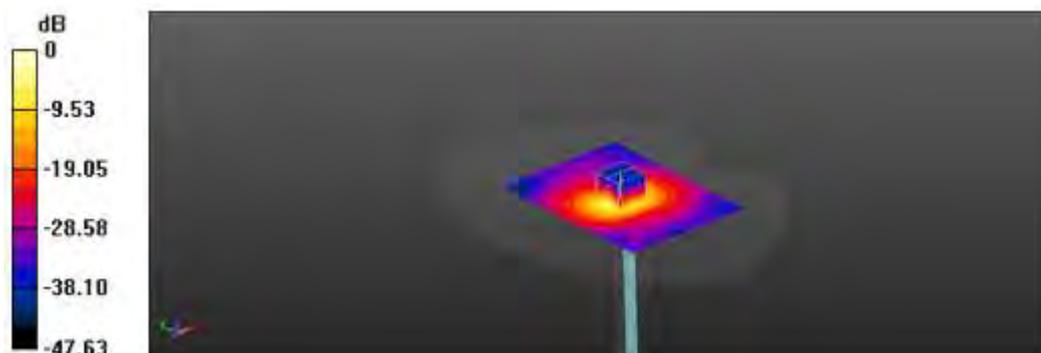System Performance Check (without Area Scan)/5800 MHz Verification Input Power 100 mW 2020-01-21/Area Scan (11x15x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 17.0 W/kg**System Performance Check (without Area Scan)/5800 MHz Verification Input Power 100 mW 2020-01-21/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 61.77 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 36.5 W/kg
SAR(1 g) = 8.31 W/kg; SAR(10 g) = 2.38 W/kg
Smallest distance from peaks to all points 3 dB below = 7.5 mm
Ratio of SAR at M2 to SAR at M1 = 61.7%
Maximum value of SAR (measured) = 21.8 W/kg

0 dB = 17.0 W/kg = 12.30 dBW/kg

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0004-A
Page (128) of (323)

KCTL

17. Test Results

#1

Date: 1/13/2020

Test Laboratory: KCTL Inc.

File Name: [1.GSM850 Head.da53:0](#)

DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE

Communication System: UID 0, GSM850 (0); Frequency: 836.8 MHz; Duty Cycle: 1:8.30042
Medium parameters used: $f = 836.8$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.361$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(9.43, 9.43, 9.43) @ 836.8 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/GSM850_Voice_CH190_Right Cheek/Area Scan (10x13x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.151 W/kg

Configuration/GSM850_Voice_CH190_Right Cheek/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.53 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.099 W/kg

Smallest distance from peaks to all points 3 dB below = 23.2 mm

Ratio of SAR at M2 to SAR at M1 = 77.9%

Maximum value of SAR (measured) = 0.156 W/kg

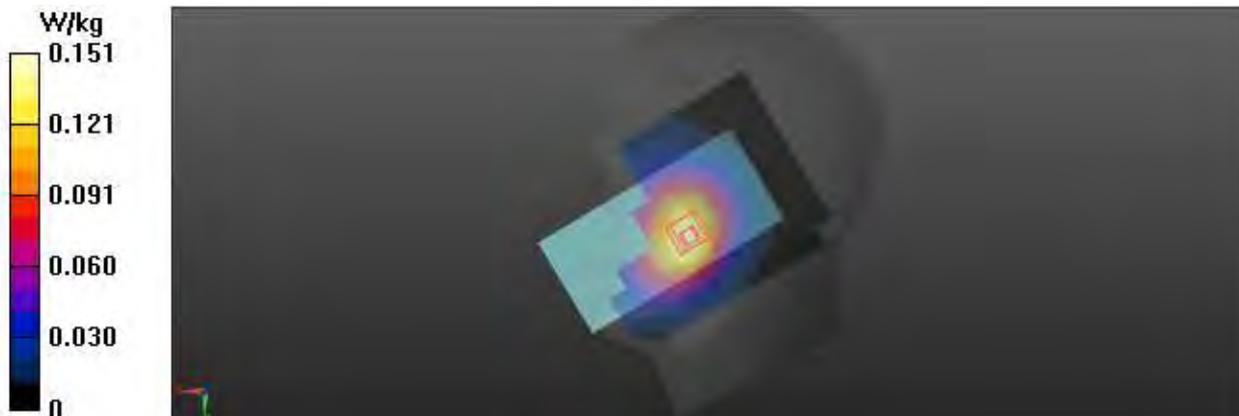

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIA002-004/2

#2

Date: 1/7/2020

Test Laboratory: KCTL Inc.

File Name: [1.GSM1900 Head.da53:1](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, GSM1900_4TX (0); Frequency: 1880 MHz; Duty Cycle:
1:2.07491Medium parameters used: $f = 1880$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 39.635$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.13, 8.13, 8.13) @ 1880 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration 2/GSM1900_GPRS 4Tx_CH661_Left Cheek/Area Scan (10x13x1): Measurement
grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.154 W/kg

Configuration 2/GSM1900_GPRS 4Tx_CH661_Left Cheek/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.634 V/m; Power Drift = -0.17 dB



Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.072 W/kg

Smallest distance from peaks to all points 3 dB below = 15.5 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 0.163 W/kg

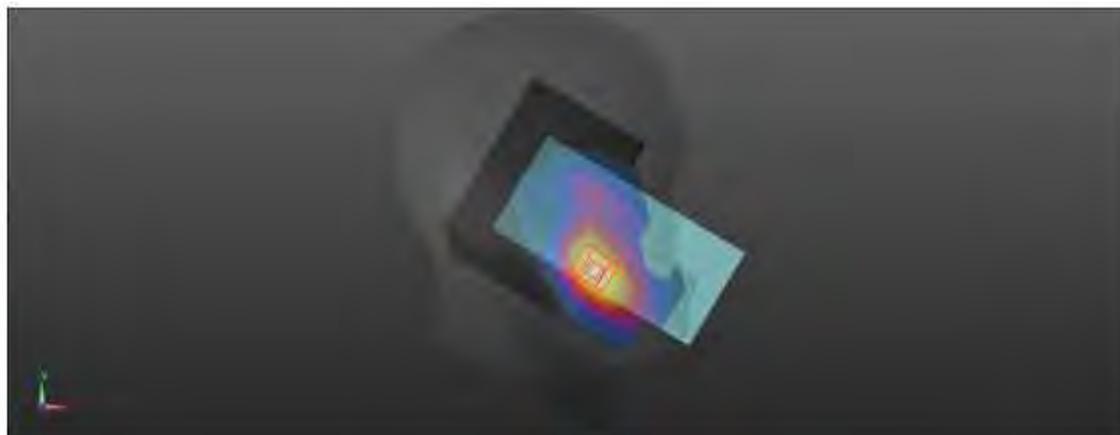

#3

Date: 1/6/2020

Test Laboratory: KCTL Inc.

File Name: [1.WCDMA FDD II Head.da53:1](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, W-CDMA 1900 (Band 2) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 39.626$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.13, 8.13, 8.13) @ 1880 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration 2/WCDMA FDD II_CH9400_Left Cheek/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.275 W/kg

Configuration 2/WCDMA FDD II_CH9400_Left Cheek/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.275 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.128 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 0.292 W/kg



#4

Date: 1/8/2020

Test Laboratory: KCTL Inc.

File Name: [1.WCDMA FDD IV Head.da53:1](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, W-CDMA 1750 (Band 4) (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 38.949$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.48, 8.48, 8.48) @ 1732.4 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration 2/WCDMA FDD IV_CH1412_Left Cheek/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.548 W/kg

Configuration 2/WCDMA FDD IV_CH1412_Left Cheek/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.080 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.650 W/kg

SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.257 W/kg

Smallest distance from peaks to all points 3 dB below = 16.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.3%

Maximum value of SAR (measured) = 0.558 W/kg

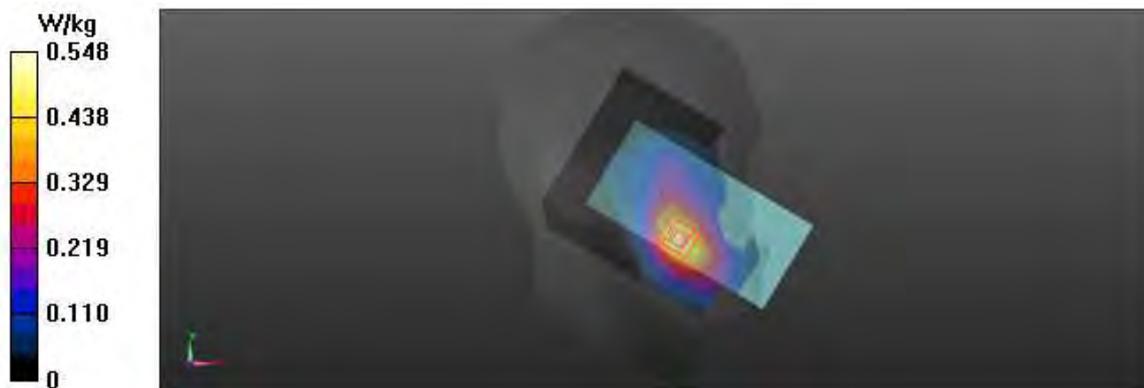

#5

Date: 1/13/2020

Test Laboratory: KCTL Inc.

File Name: [3.WCDMA FDD V Head.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, W-CDMA 850 (Band 5) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.366$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.43, 9.43, 9.43) @ 836.6 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/WCDMA FDD V_CH4183_Right Cheek/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.205 W/kg

Configuration/WCDMA FDD V_CH4183_Right Cheek/Zoom Scan (6x6x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.52 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 24.4 mm

Ratio of SAR at M2 to SAR at M1 = 78.4%

Maximum value of SAR (measured) = 0.207 W/kg

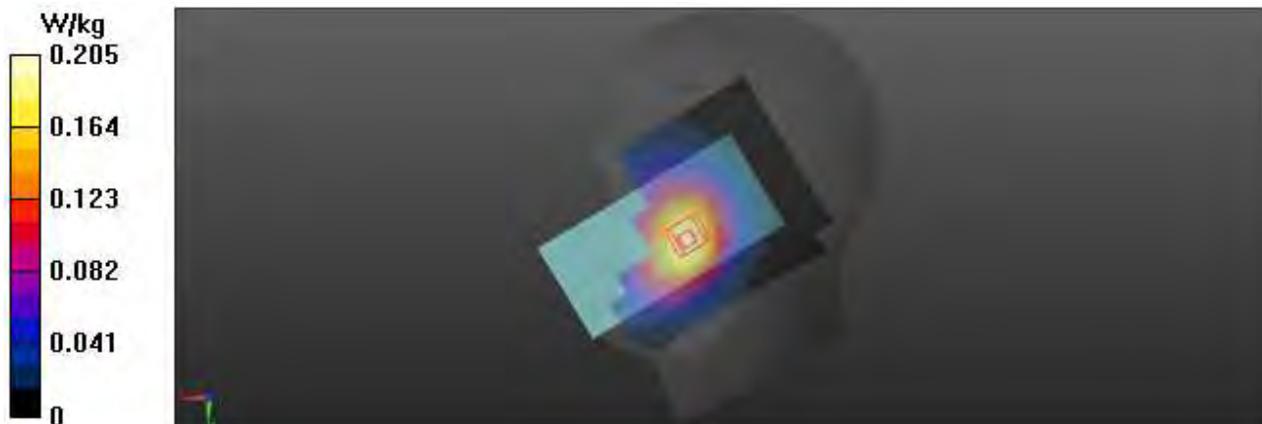

#6

Date: 1/6/2020

Test Laboratory: KCTL Inc.

File Name: [4.LTE Band 2 QPSK 20 MHz Head.da53:1](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, LTE Band 2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 39.626$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.13, 8.13, 8.13) @ 1880 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration 2/LTE Band 2_QPSK_20 MHz_1RB_49offset_CH18900_Left Cheek/Area Scan**(91x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.283 W/kg

Configuration 2/LTE Band 2_QPSK_20 MHz_1RB_49offset_CH18900_Left Cheek/Zoom Scan**(5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.734 V/m; Power Drift = 0.11 dB



Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.124 W/kg

Smallest distance from peaks to all points 3 dB below = 15.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.7%

Maximum value of SAR (measured) = 0.290 W/kg

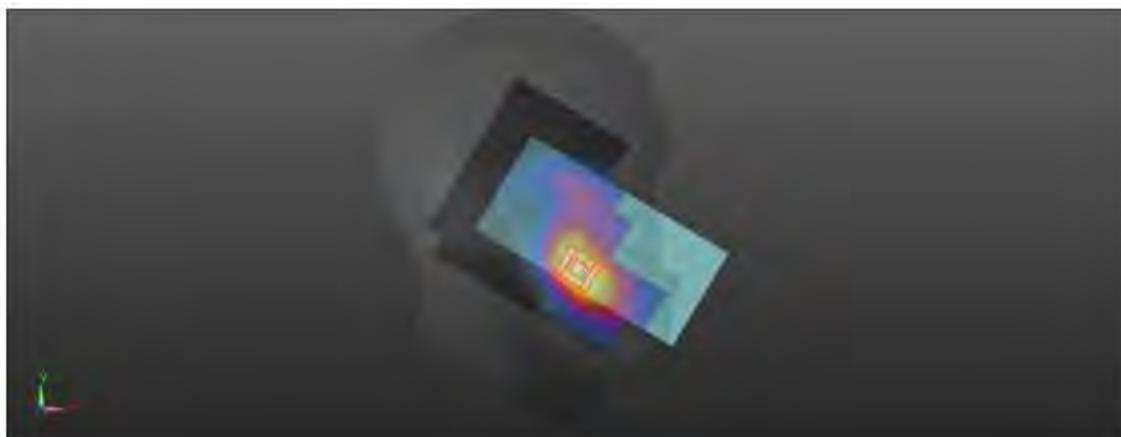

#7

Date: 1/8/2020

Test Laboratory: KCTL Inc.

File Name: [4.LTE Band 4 QPSK 20 MHz Head.da53:1](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, LTE Band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 38.934$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.48, 8.48, 8.48) @ 1732.5 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration 2/LTE Band 4_QPSK_20 MHz_1RB_49offset_CH20175_Left Cheek/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.463 W/kg

Configuration 2/LTE Band 4_QPSK_20 MHz_1RB_49offset_CH20175_Left Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.742 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.546 W/kg

SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.215 W/kg

Smallest distance from peaks to all points 3 dB below = 15.5 mm

Ratio of SAR at M2 to SAR at M1 = 64.1%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.466 W/kg



#8

Date: 1/14/2020

Test Laboratory: KCTL Inc.

File Name: [1.LTE Band 5 QPSK 20 MHz Head.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.629$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.43, 9.43, 9.43) @ 836.5 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 5_QPSK_10 MHz_1RB_25offset_CH20525_Right Cheek/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.207 W/kg

Configuration/LTE Band 5_QPSK_10 MHz_1RB_25offset_CH20525_Right Cheek/Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.53 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.229 W/kg


SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.136 W/kg

Smallest distance from peaks to all points 3 dB below = 23.2 mm

Ratio of SAR at M2 to SAR at M1 = 78.2%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.213 W/kg

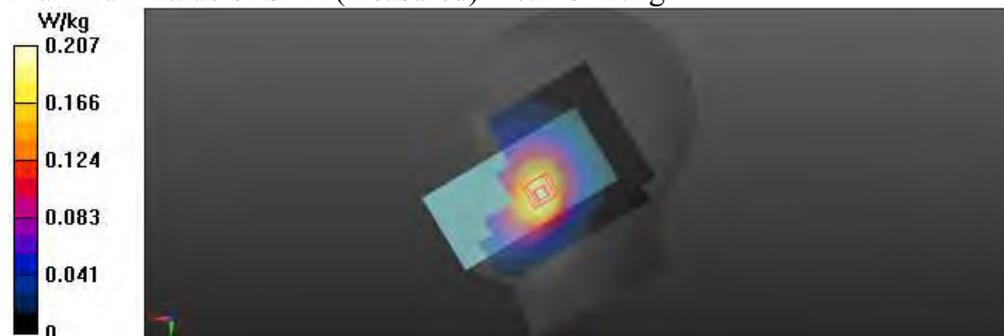

#9

Date: 2020-01-14

Test Laboratory: KCTL Inc.

File Name: [1.LTE Band 12_QPSK_10 MHz_Head.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANZCZ**Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 42.468$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(9, 9, 9) @ 707.5 MHz; ; Calibrated: 2019-03-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: SAM twin SN1724; Type: QD000P40CD; Serial: TP:1724
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 12_QPSK_10 MHz_1RB_25offset_CH23095_Right Cheek/Area Scan**(8x10x1):** Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0897 W/kg**Configuration/LTE Band 12_QPSK_10 MHz_1RB_25offset_CH23095_Right Cheek/Zoom****Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.47 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0990 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.064 W/kg

Ratio of SAR at M2 to SAR at M1 = 83.6%

Maximum value of SAR (measured) = 0.0932 W/kg

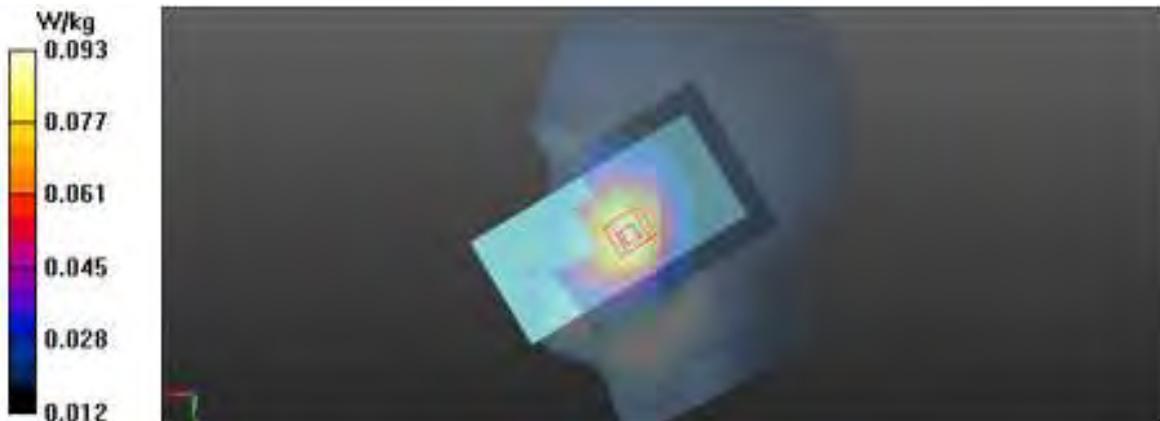

#10

Date: 2020-01-13

Test Laboratory: KCTL Inc.

File Name: [1.LTE Band 13 QPSK 10 MHz Head.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANZCZ**

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 43.223$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(9, 9, 9) @ 782 MHz; ; Calibrated: 2019-03-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: SAM twin SN1724; Type: QD000P40CD; Serial: TP:1724
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 13_QPSK_10 MHz_1RB_0offset_CH23230_Right Cheek/Area Scan**(8x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0511 W/kg

Configuration/LTE Band 13_QPSK_10 MHz_1RB_0offset_CH23230_Right Cheek/Zoom Scan**(5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 2.138 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.035 W/kg

Ratio of SAR at M2 to SAR at M1 = 78.2%

Maximum value of SAR (measured) = 0.0532 W/kg

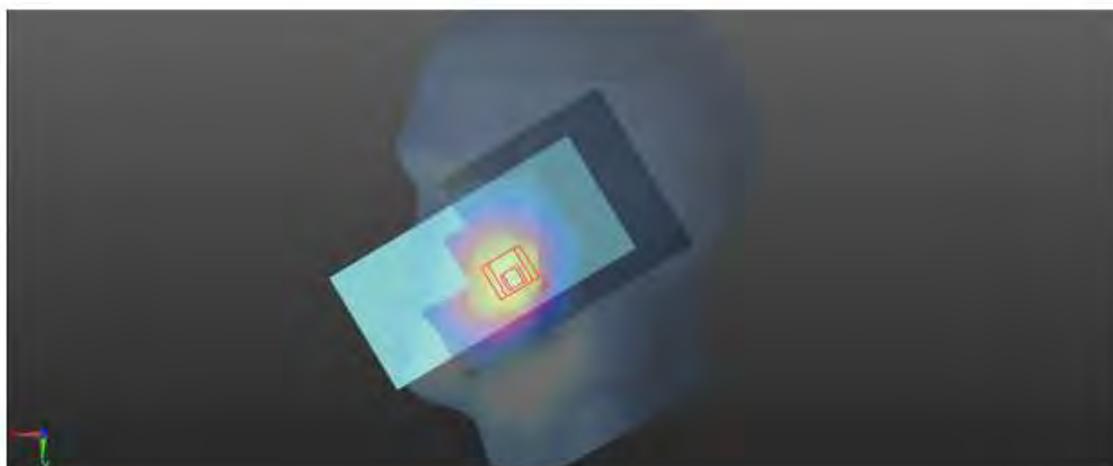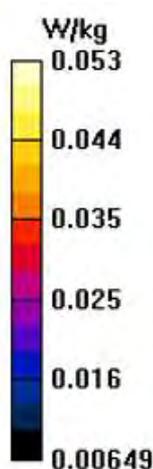

#11

Date: 2020-01-14

Test Laboratory: KCTL Inc.

File Name: [1.LTE Band 17 QPSK 10 MHz Head.da53:1](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANZCZ**

Communication System: UID 0, LTE Band 17 (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 42.371$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(9, 9, 9) @ 710 MHz; ; Calibrated: 2019-03-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: SAM twin SN1724; Type: QD000P40CD; Serial: TP:1724
- Measurement SW: DASY52, Version 52.10 (3);

Configuration 2/LTE Band 17_QPSK_10 MHz_1RB_25offset_CH23790_Left Cheek/Area**Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0715 W/kg

Configuration 2/LTE Band 17_QPSK_10 MHz_1RB_25offset_CH23790_Left Cheek/Zoom**Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm



Reference Value = 10.06 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0830 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.055 W/kg

Ratio of SAR at M2 to SAR at M1 = 82.6%

Maximum value of SAR (measured) = 0.0781 W/kg

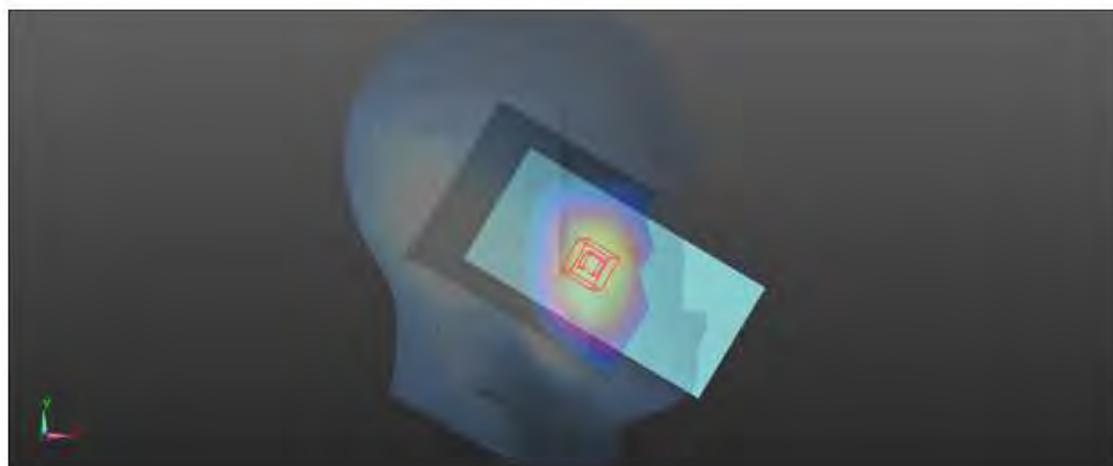

#12

Date: 1/14/2020

Test Laboratory: KCTL Inc.

File Name: **4.LTE Band 26 QPSK 20 MHz Head.da53:0****DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.687$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.43, 9.43, 9.43) @ 831.5 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 26_QPSK_15 MHz_1RB_0offset_CH26865_Right Cheek/Area Scan**(10x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.177 W/kg

Configuration/LTE Band 26_QPSK_15 MHz_1RB_0offset_CH26865_Right Cheek/Zoom Scan**(7x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.30 V/m; Power Drift = -0.18 dB



Peak SAR (extrapolated) = 0.192 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below = 23.4 mm

Ratio of SAR at M2 to SAR at M1 = 77.8%

Maximum value of SAR (measured) = 0.179 W/kg

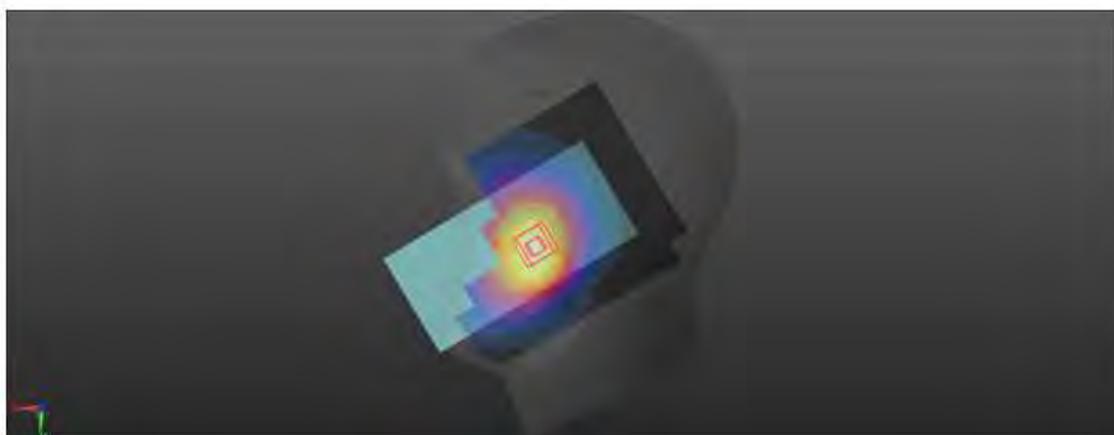

#13


Date: 2020-01-09

Test Laboratory: KCTL Inc.

File Name: [1.LTE Band 41_QPSK_20 MHz_Head.da53:1](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANZCZ**Communication System: UID 0, LTE Band 41 (0); Frequency: 2680 MHz; Duty Cycle: 1:1.58016
Medium parameters used: $f = 2680$ MHz; $\sigma = 2.023$ S/m; $\epsilon_r = 38.379$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(7.68, 7.68, 7.68) @ 2680 MHz; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1567; Calibrated: 2019-02-05
- Phantom: Twin-SAM V4.0 #1; Type: QD 000 P40 CC; Serial: 1363
- Measurement SW: DASY52, Version 52.10 (3);

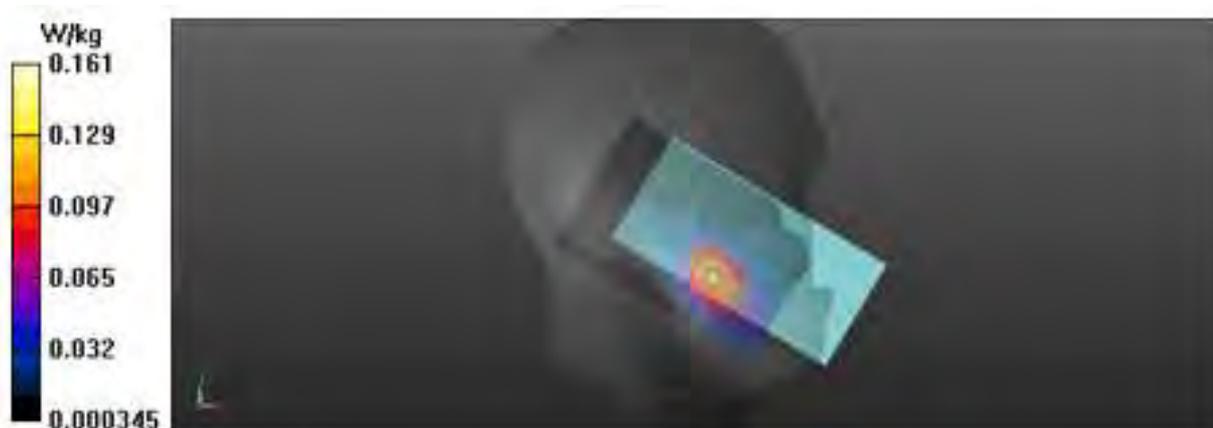Configuration 2/LTE Band 41_QPSK_20 MHz_1RB_49offset_CH41490_Left Cheek/Area Scan (9x13x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.156 W/kg**Configuration 2/LTE Band 41_QPSK_20 MHz_1RB_49offset_CH41490_Left Cheek/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.795 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.206 W/kg
SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.044 W/kg
Smallest distance from peaks to all points 3 dB below = 11.4 mm
Ratio of SAR at M2 to SAR at M1 = 43.7%
Maximum value of SAR (measured) = 0.161 W/kg

#14

Date: 1/9/2020

Test Laboratory: KCTL Inc.

File Name: [1.LTE Band 66 QPSK 20 MHz Head.da53:1](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, LTE Band 66 (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.428$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(8.48, 8.48, 8.48) @ 1770 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration 2/LTE Band 66_QPSK_20 MHz_1RB_0offset_CH132572_Left Cheek/Area**Scan (10x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.377 W/kg

Configuration 2/LTE Band 66_QPSK_20 MHz_1RB_0offset_CH132572_Left Cheek/Zoom**Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.71 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 14.7 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 0.385 W/kg

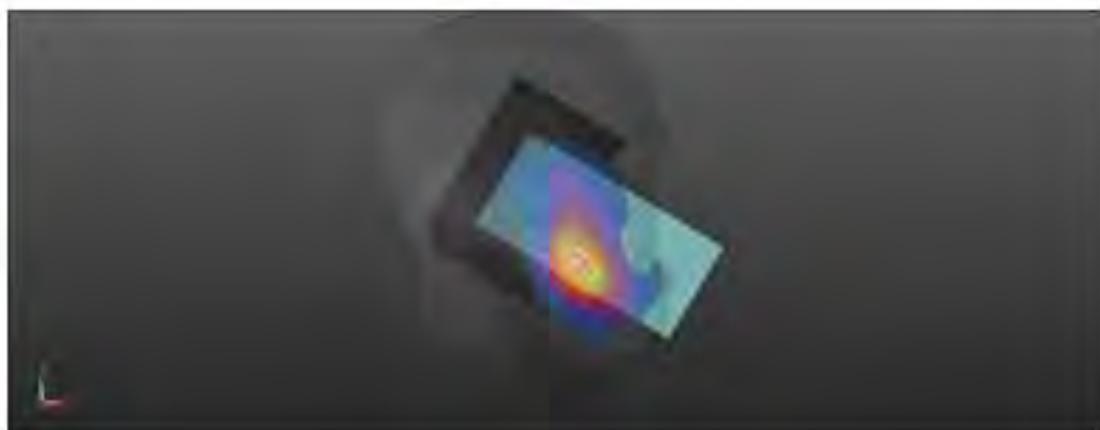

#15

Date: 1/22/2020

Test Laboratory: KCTL Inc.

File Name: [1. 2.4G 802.11b Head.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, 2.4GWLAN (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.818$ S/m; $\epsilon_r = 38.645$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(7.46, 7.46, 7.46) @ 2462 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 b_CH11_Right Cheek/Area Scan (11x11x1): Measurement grid:

dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.187 W/kg

Configuration/802.11 b_CH11_Right Cheek/Zoom Scan (8x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.41 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.061 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 36.6%

Maximum value of SAR (measured) = 0.195 W/kg



#16

Date: 1/17/2020

Test Laboratory: KCTL Inc.

File Name: [1. 5.3G 802.11ac VHT80 Head.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, 5GWLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.896$ S/m; $\epsilon_r = 35.792$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(5.15, 5.15, 5.15) @ 5290 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 ac_VHT80_CH58_Right Tilt/Area Scan (10x13x1): Measurement grid:
dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.415 W/kg

Configuration/802.11 ac_VHT80_CH58_Right Tilt/Zoom Scan (9x9x7)/Cube 0: Measurement
grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.822 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.04 W/kg


SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.569 W/kg

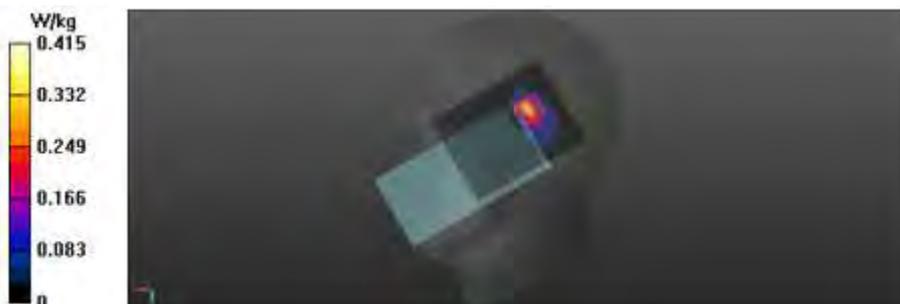

#17

Date: 1/20/2020

Test Laboratory: KCTL Inc.

File Name: [1. 5.6G 802.11ac VHT80 Head.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, 5GWLAN (0); Frequency: 5530 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 5.092$ S/m; $\epsilon_r = 35.829$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(4.79, 4.79, 4.79) @ 5530 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 ac_VHT80_CH106_Right Tilt/Area Scan (10x13x1): Measurement grid:
dx=10mm, dy=10mmInfo: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.643 W/kg

Configuration/802.11 ac_VHT80_CH106_Right Tilt/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.030 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.47 W/kg


SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.092 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.822 W/kg

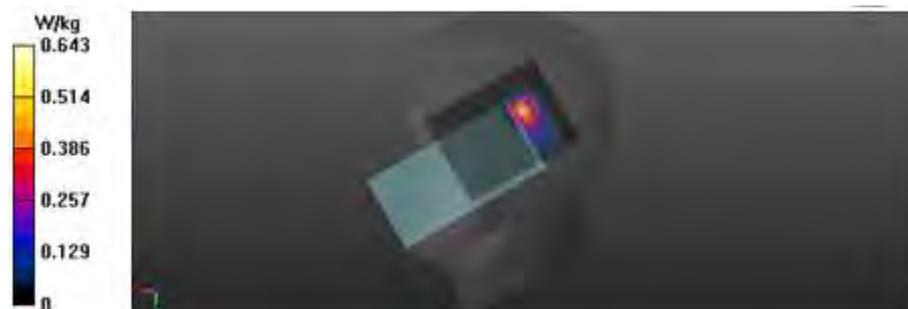

#18

Date: 1/21/2020

Test Laboratory: KCTL Inc.

File Name: [1. 5.8G 802.11ac VHT80 Head.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, 5GWLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.368$ S/m; $\epsilon_r = 35.19$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(4.7, 4.7, 4.7) @ 5775 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 ac_VHT80_CH155_Right Tilt/Area Scan (10x13x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.734 W/kg

Configuration/802.11 ac_VHT80_CH155_Right Tilt/Zoom Scan (9x9x7)/Cube 0: Measurement

grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.049 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.118 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 1.05 W/kg



#19

Date: 1/22/2020

Test Laboratory: KCTL Inc.

File Name: [4. Bluetooth GFSK DH1 Head.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, Bluetooth DH1 (0); Frequency: 2402 MHz; Duty Cycle: 1:3.43637
Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.746$ S/m; $\epsilon_r = 38.824$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(7.46, 7.46, 7.46) @ 2402 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/Bluetooth_GFSK_DH1_CH1_Right Cheek/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0314 W/kg

Configuration/Bluetooth_GFSK_DH1_CH1_Right Cheek/Zoom Scan (11x10x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.018 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0590 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.011 W/kg

Ratio of SAR at M2 to SAR at M1 = 31.5%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0371 W/kg



#20

Date: 1/13/2020

Test Laboratory: KCTL Inc.

File Name: [2.GSM850 Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, GSM850 (0); Frequency: 836.8 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 836.8$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.361$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.43, 9.43, 9.43) @ 836.8 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/GSM850_Voice_CH190_Rear_15 mm/Area Scan (9x9x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.255 W/kg

Configuration/GSM850_Voice_CH190_Rear_15 mm/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.35 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.165 W/kg

Ratio of SAR at M2 to SAR at M1 = 75.6%

Maximum value of SAR (measured) = 0.265 W/kg

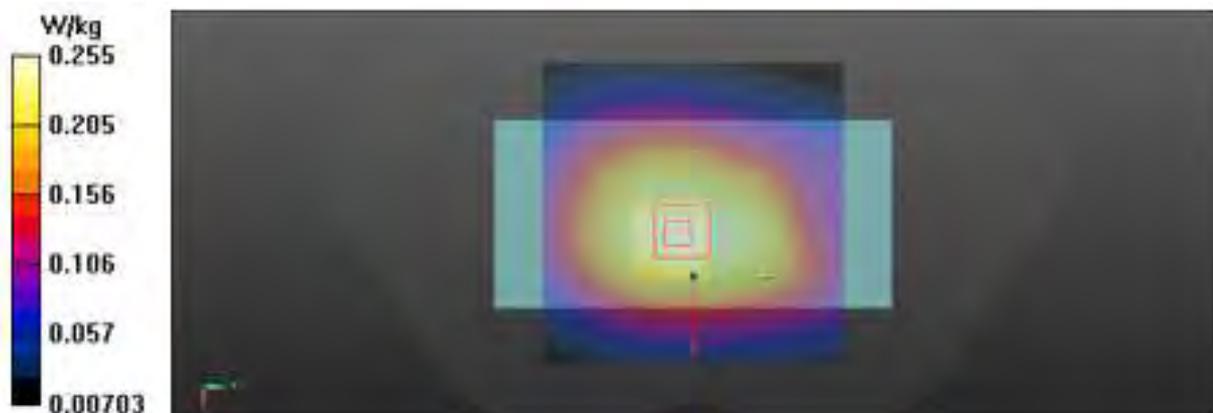

#21

Date: 1/7/2020

Test Laboratory: KCTL Inc.

File Name: [2.GSM1900 Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, GSM1900_4TX (0); Frequency: 1880 MHz; Duty Cycle:
1:2.07491Medium parameters used: $f = 1880$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 39.635$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.13, 8.13, 8.13) @ 1880 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/GSM1900_GPRS 4Tx_CH661_Rear_15 mm/Area Scan (9x9x1): Measurement
grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.243 W/kg

Configuration/GSM1900_GPRS 4Tx_CH661_Rear_15 mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.385 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.320 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.087 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 0.260 W/kg



#22

Date: 1/6/2020

Test Laboratory: KCTL Inc.

File Name: [2.WCDMA FDD II Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, W-CDMA 1900 (Band 2) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 39.626$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.13, 8.13, 8.13) @ 1880 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/WCDMA FDD II_CH9400_Rear_15 mm/Area Scan (9x9x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.496 W/kg

Configuration/WCDMA FDD II_CH9400_Rear_15 mm/Zoom Scan (5x6x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.34 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.655 W/kg

SAR(1 g) = 0.340 W/kg; SAR(10 g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 0.522 W/kg

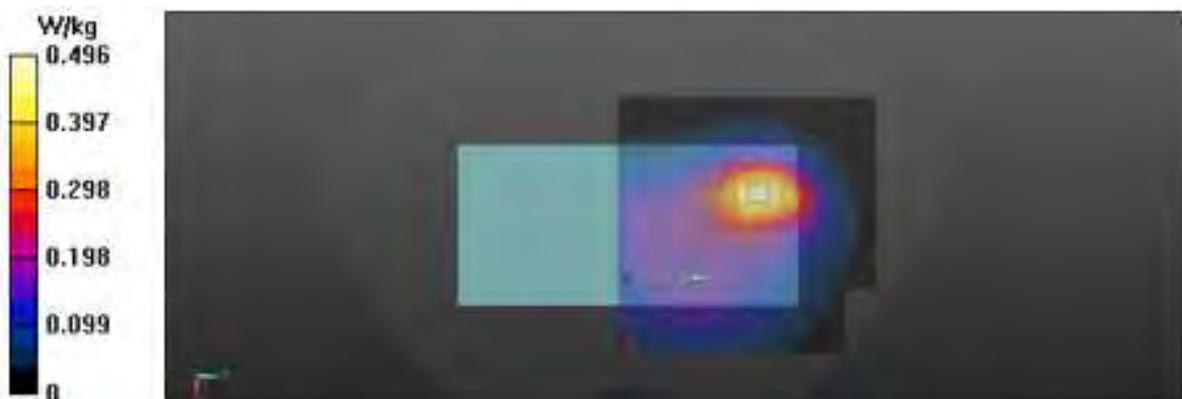

#23

Date: 1/8/2020

Test Laboratory: KCTL Inc.

File Name: [2.WCDMA FDD IV Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, W-CDMA 1750 (Band 4) (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 38.949$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.48, 8.48, 8.48) @ 1732.4 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/WCDMA FDD IV_CH1412_Front_15 mm/Area Scan (9x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.491 W/kg

Configuration/WCDMA FDD IV_CH1412_Front_15 mm/Zoom Scan (7x8x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.90 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.361 W/kg; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 37.9 mm

Ratio of SAR at M2 to SAR at M1 = 62.6%

Maximum value of SAR (measured) = 0.487 W/kg

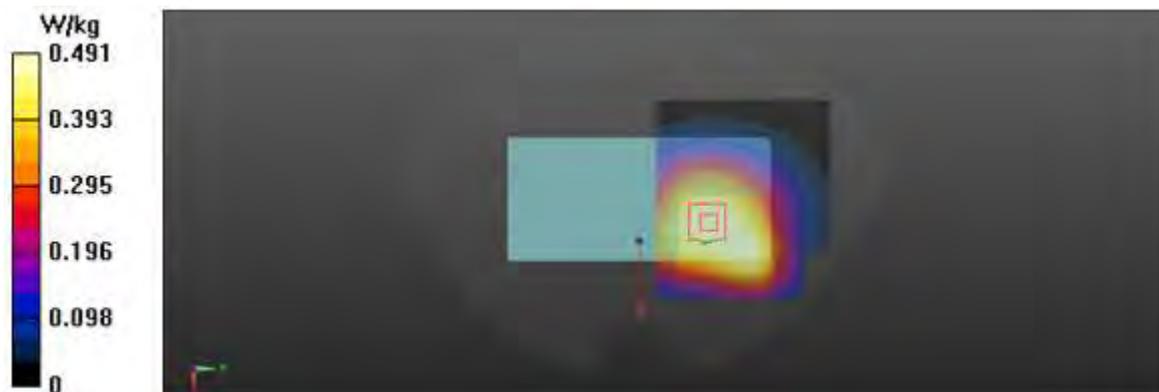

#24

Date: 1/13/2020

Test Laboratory: KCTL Inc.

File Name: [4.WCDMA FDD V Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, W-CDMA 850 (Band 5) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.366$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.43, 9.43, 9.43) @ 836.6 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/WCDMA FDD V_CH4183_Rear_15 mm/Area Scan (9x9x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.343 W/kg

Configuration/WCDMA FDD V_CH4183_Rear_15 mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.22 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.377 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.219 W/kg

Ratio of SAR at M2 to SAR at M1 = 76.6%

Maximum value of SAR (measured) = 0.348 W/kg

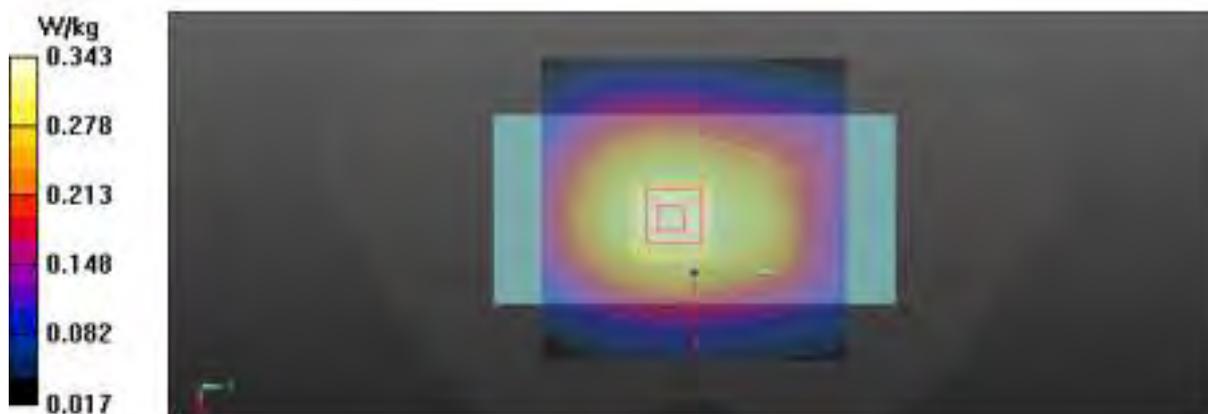

#25


Date: 1/6/2020

Test Laboratory: KCTL Inc.

File Name: [5.LTE Band 2 QPSK 20 MHz Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, LTE Band 2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 39.626$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.13, 8.13, 8.13) @ 1880 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

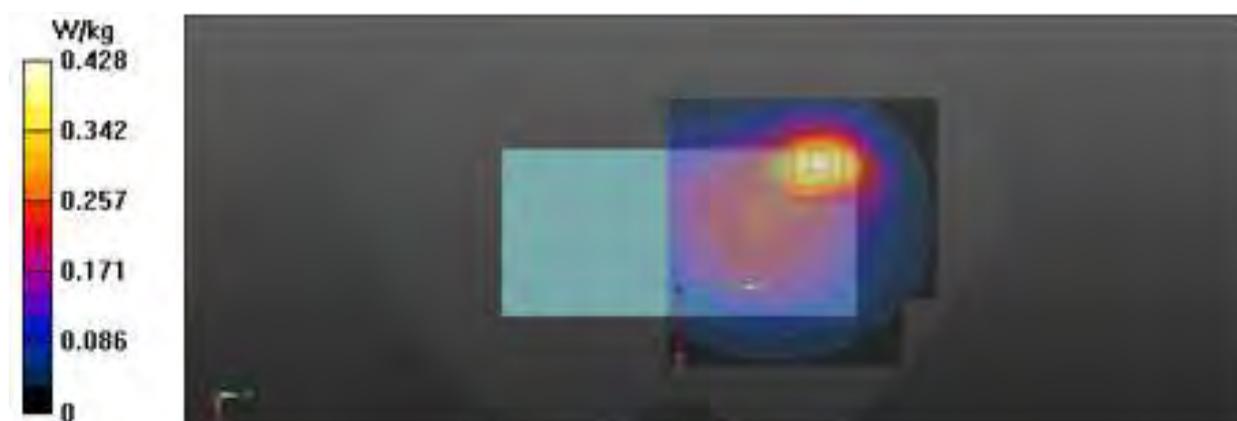Configuration/LTE Band 2_QPSK_20 MHz_1RB_49offset_CH18900_Rear_15 mm/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.428 W/kg**Configuration/LTE Band 2_QPSK_20 MHz_1RB_49offset_CH18900_Rear_15 mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.54 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 0.561 W/kg
SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.157 W/kg
Smallest distance from peaks to all points 3 dB below = 14.4 mm
Ratio of SAR at M2 to SAR at M1 = 50.3%
Maximum value of SAR (measured) = 0.451 W/kg

#26

Date: 1/8/2020

Test Laboratory: KCTL Inc.

File Name: [5.LTE Band 4 QPSK 20 MHz Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, LTE Band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 38.934$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.48, 8.48, 8.48) @ 1732.5 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 4_QPSK_20 MHz_1RB_49offset_CH20175_Rear_15 mm/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mmInfo: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.465 W/kg

Configuration/LTE Band 4_QPSK_20 MHz_1RB_49offset_CH20175_Rear_15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.81 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.562 W/kg


SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.220 W/kg

Smallest distance from peaks to all points 3 dB below = 23.8 mm

Ratio of SAR at M2 to SAR at M1 = 59%

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.468 W/kg

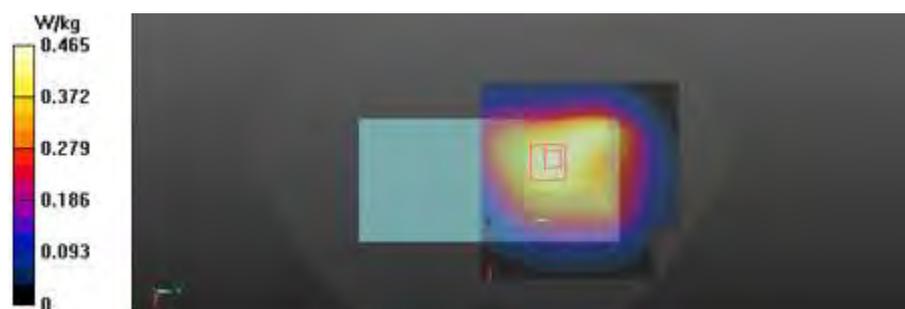

This test report shall not be reproduced, except in full, without the written approval

#27

Date: 1/14/2020

Test Laboratory: KCTL Inc.

File Name: [2.LTE Band 5 QPSK 20 MHz Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.629$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.43, 9.43, 9.43) @ 836.5 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 5_QPSK_10 MHz_1RB_25offset_CH20525_Rear_15 mm/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.310 W/kg

Configuration/LTE Band 5_QPSK_10 MHz_1RB_25offset_CH20525_Rear_15 mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.28 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.197 W/kg

Ratio of SAR at M2 to SAR at M1 = 74.6%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.317 W/kg

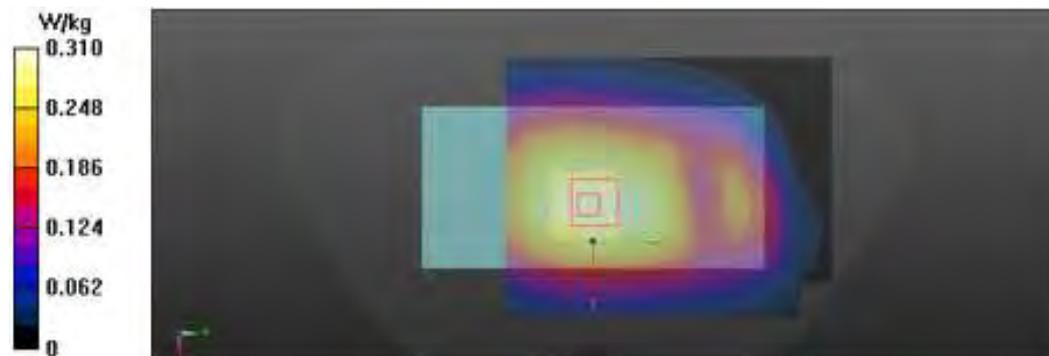

#28


Date: 2020-01-14

Test Laboratory: KCTL Inc.

File Name: [2.LTE Band 12 QPSK 10 MHz Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANZCZ**Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 42.468$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(9, 9, 9) @ 707.5 MHz; ; Calibrated: 2019-03-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: SAM twin SN1724; Type: QD000P40CD; Serial: TP:1724
- Measurement SW: DASY52, Version 52.10 (3);

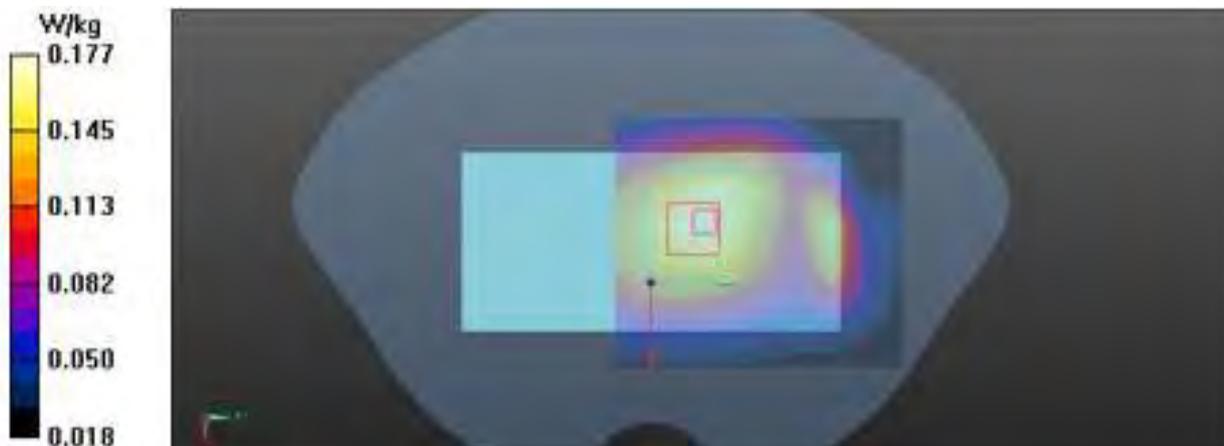Configuration/LTE Band 12_QPSK_10 MHz_1RB_25offset_CH23095_Rear_15 mm/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.175 W/kg**Configuration/LTE Band 12_QPSK_10 MHz_1RB_25offset_CH23095_Rear_15 mm/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.85 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.195 W/kg
SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.111 W/kg
Ratio of SAR at M2 to SAR at M1 = 73.9%
Maximum value of SAR (measured) = 0.177 W/kg

#29


Date: 2020-01-13

Test Laboratory: KCTL Inc.

File Name: [2.LTE Band 13 QPSK 10 MHz Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANZCZ**Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 43.223$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(9, 9, 9) @ 782 MHz; ; Calibrated: 2019-03-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: SAM twin SN1724; Type: QD000P40CD; Serial: TP:1724
- Measurement SW: DASY52, Version 52.10 (3);

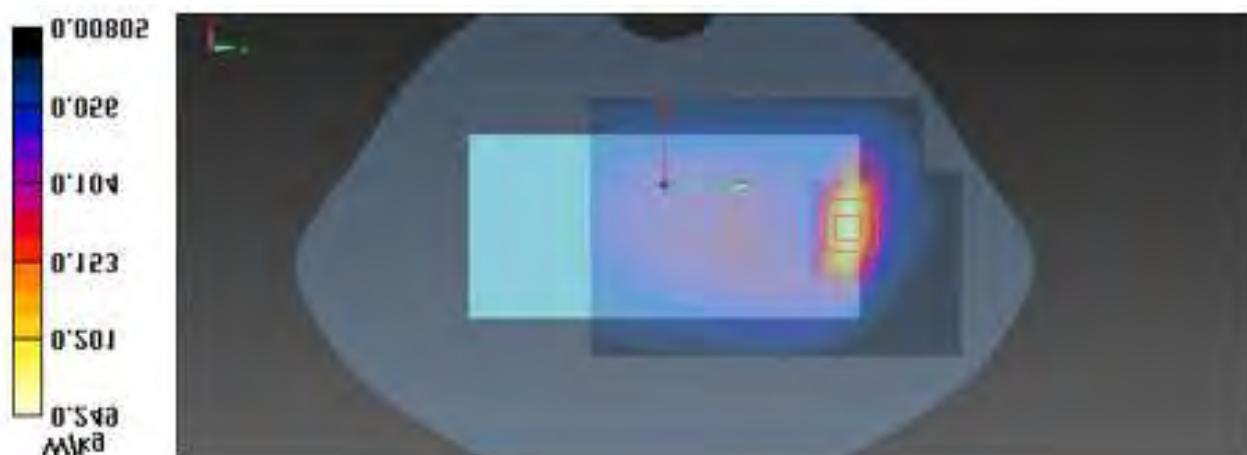Configuration/LTE Band 13_QPSK_10 MHz_1RB_0offset_CH23230_Rear_15 mm/Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.237 W/kg**Configuration/LTE Band 13_QPSK_10 MHz_1RB_0offset_CH23230_Rear_15 mm/Zoom Scan (6x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 11.55 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.313 W/kg
SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.094 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 54.8%
Maximum value of SAR (measured) = 0.249 W/kg

#30

Date: 2020-01-14

Test Laboratory: KCTL Inc.

File Name: **2.LTE Band 17 QPSK 10 MHz Body.da53:0****DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANZCZ**

Communication System: UID 0, LTE Band 17 (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 42.371$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(9, 9, 9) @ 710 MHz; ; Calibrated: 2019-03-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: SAM twin SN1724; Type: QD000P40CD; Serial: TP:1724
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 17_QPSK_10 MHz_25RB_25offset_CH23790_Rear_15 mm/Area**Scan (7x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.164 W/kg

Configuration/LTE Band 17_QPSK_10 MHz_25RB_25offset_CH23790_Rear_15 mm/Zoom**Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 14.14 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.112 W/kg

Ratio of SAR at M2 to SAR at M1 = 78.3%

Maximum value of SAR (measured) = 0.170 W/kg

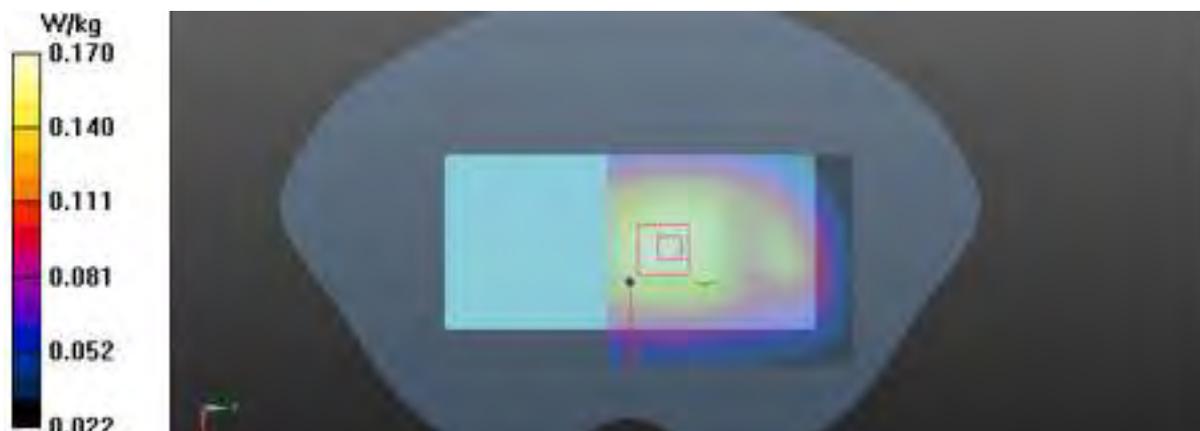

#31


Date: 1/14/2020

Test Laboratory: KCTL Inc.

File Name: [5.LTE Band 26 QPSK 20 MHz Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.687$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.43, 9.43, 9.43) @ 831.5 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

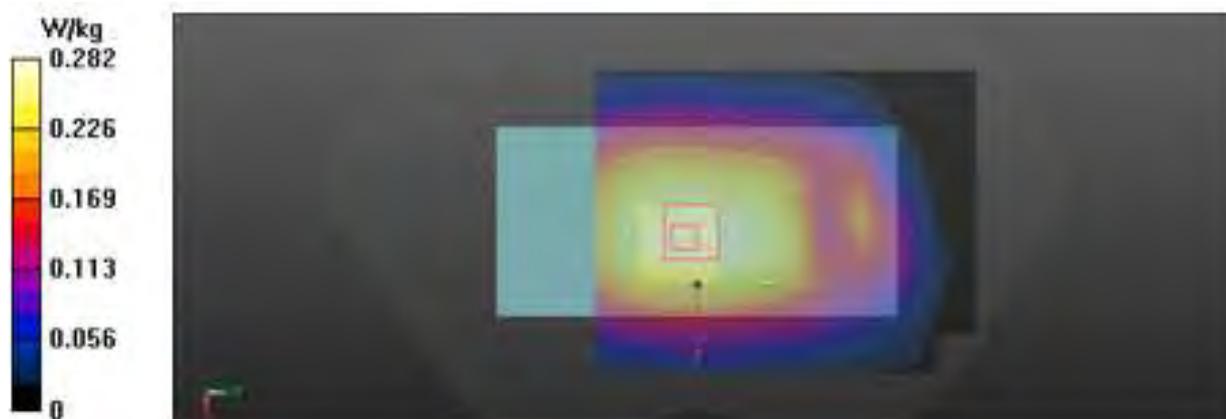Configuration/LTE Band 26_QPSK_15 MHz_1RB_0offset_CH26865_Rear_15 mm/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.282 W/kg**Configuration/LTE Band 26_QPSK_15 MHz_1RB_0offset_CH26865_Rear_15 mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.53 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.316 W/kg
SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.178 W/kg
Ratio of SAR at M2 to SAR at M1 = 74.2%
Maximum value of SAR (measured) = 0.288 W/kg

#32


Date: 2020-01-09

Test Laboratory: KCTL Inc.

File Name: [2.LTE Band 41 QPSK 20 MHz Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANZCZ**Communication System: UID 0, LTE Band 41 (0); Frequency: 2680 MHz; Duty Cycle: 1:1.58016
Medium parameters used: $f = 2680$ MHz; $\sigma = 2.023$ S/m; $\epsilon_r = 38.379$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(7.68, 7.68, 7.68) @ 2680 MHz; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1567; Calibrated: 2019-02-05
- Phantom: Twin-SAM V4.0 #1; Type: QD 000 P40 CC; Serial: 1363
- Measurement SW: DASY52, Version 52.10 (3);

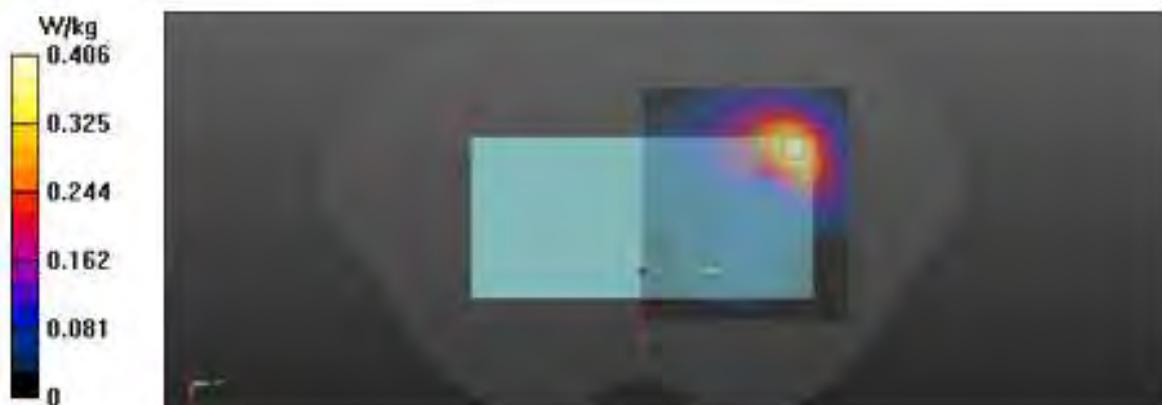Configuration/LTE Band 41_QPSK_20 MHz_1RB_49offset_CH41490_Rear_15 mm/Area Scan (10x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.381 W/kg**Configuration/LTE Band 41_QPSK_20 MHz_1RB_49offset_CH41490_Rear_15 mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.54 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.526 W/kg
SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.106 W/kg
Smallest distance from peaks to all points 3 dB below = 13.4 mm
Ratio of SAR at M2 to SAR at M1 = 41.2%
Maximum value of SAR (measured) = 0.406 W/kg

#33

Date: 1/9/2020

Test Laboratory: KCTL Inc.

File Name: [2.LTE Band 66 QPSK 20 MHz Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, LTE Band 66 (0); Frequency: 1770 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1770$ MHz; $\sigma = 1.428$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(8.48, 8.48, 8.48) @ 1770 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 66_QPSK_20 MHz_1RB_0offset_CH132572_Rear_15 mm/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.360 W/kg**Configuration/LTE Band 66_QPSK_20 MHz_1RB_0offset_CH132572_Rear_15 mm/Zoom Scan (8x9x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.59 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 0.461 W/kg
SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.150 W/kg
Smallest distance from peaks to all points 3 dB below = 16.1 mm
Ratio of SAR at M2 to SAR at M1 = 54%
Maximum value of SAR (measured) = 0.380 W/kg

#34

Date: 1/22/2020

Test Laboratory: KCTL Inc.

File Name: [2. 2.4G 802.11b Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, 2.4GWLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 38.714$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(7.46, 7.46, 7.46) @ 2437 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 b_CH6_Rear_15 mm/Area Scan (10x8x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.245 W/kg

Configuration/802.11 b_CH6_Rear_15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.069 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 42.1%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.247 W/kg



#35

Date: 1/17/2020

Test Laboratory: KCTL Inc.

File Name: [2. 5.3G 802.11a Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, 5GWLAN (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.86$ S/m; $\epsilon_r = 35.591$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(5.15, 5.15, 5.15) @ 5260 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 a_CH52_Rear_15 mm/Area Scan (13x12x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.477 W/kg

Configuration/802.11 a_CH52_Rear_15 mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.604 V/m; Power Drift = -0.09 dB



Peak SAR (extrapolated) = 0.801 W/kg

SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 63.4%

Maximum value of SAR (measured) = 0.501 W/kg

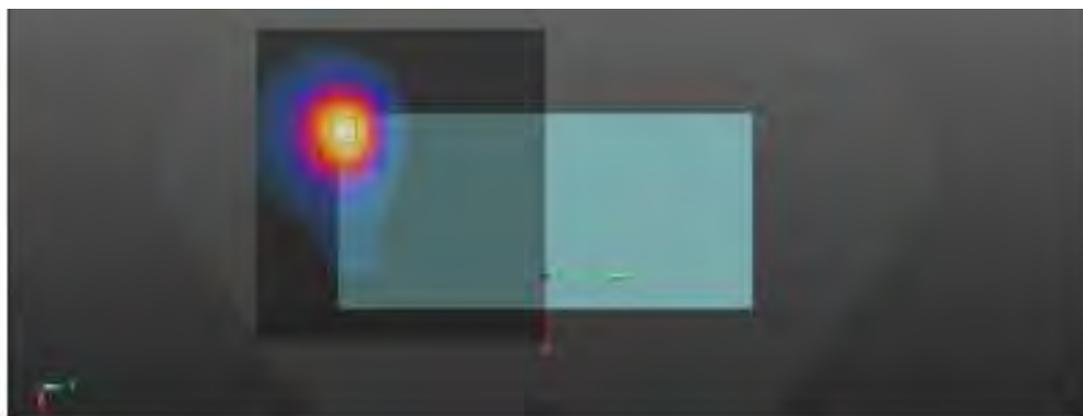

#36

Date: 1/20/2020

Test Laboratory: KCTL Inc.

File Name: [2. 5.6G 802.11a Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, 5GWLAN (0); Frequency: 5720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5720$ MHz; $\sigma = 5.351$ S/m; $\epsilon_r = 35.539$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(4.7, 4.7, 4.7) @ 5720 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 a_CH144_Rear_15 mm/Area Scan (11x9x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.08 W/kg

Configuration/802.11 a_CH144_Rear_15 mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.92 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.191 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.1%

Maximum value of SAR (measured) = 1.17 W/kg

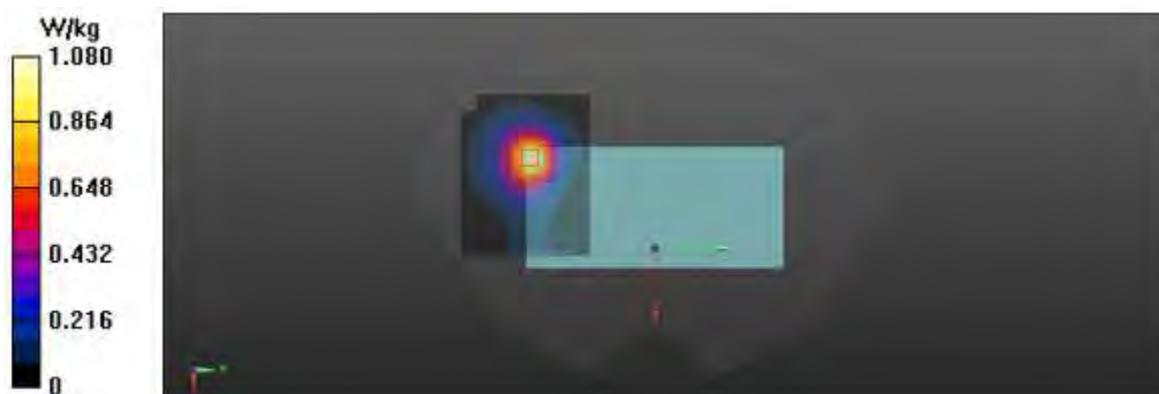

#37

Date: 1/21/2020

Test Laboratory: KCTL Inc.

File Name: [2. 5.8G 802.11a Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, 5GWLAN (0); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.339$ S/m; $\epsilon_r = 35.508$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(4.7, 4.7, 4.7) @ 5745 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 a_CH149_Rear_15 mm/Area Scan (11x9x1): Measurement grid:
dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.13 W/kg

Configuration/802.11 a_CH149_Rear_15 mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.42 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.08 W/kg


SAR(1 g) = 0.515 W/kg; SAR(10 g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.7%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.23 W/kg

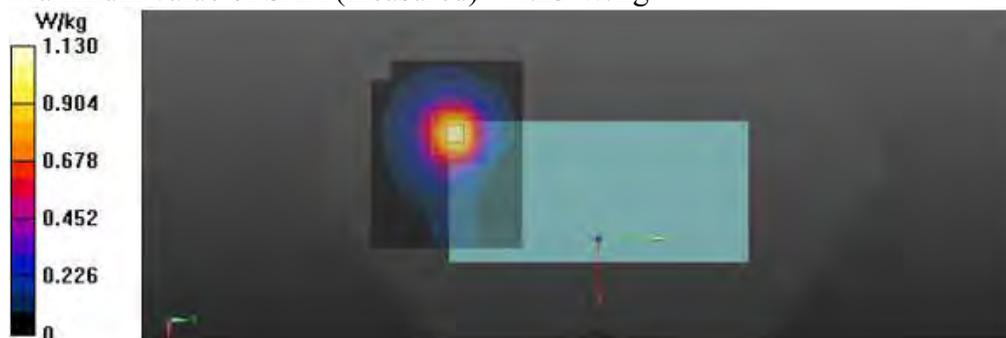

#38

Date: 1/22/2020

Test Laboratory: KCTL Inc.

File Name: [5. Bluetooth GFSK DH1 Body.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, Bluetooth DH1 (0); Frequency: 2402 MHz; Duty Cycle: 1:3.43637
Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.746$ S/m; $\epsilon_r = 38.824$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(7.46, 7.46, 7.46) @ 2402 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/Bluetooth_GFSK_DH1_CH1_Rear_15 mm/Area Scan (10x8x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.00700 W/kg

Configuration/Bluetooth_GFSK_DH1_CH1_Rear_15 mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.016 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.00238 W/kg; SAR(10 g) = 0.000843 W/kg

Ratio of SAR at M2 to SAR at M1 = 53.6%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.00608 W/kg

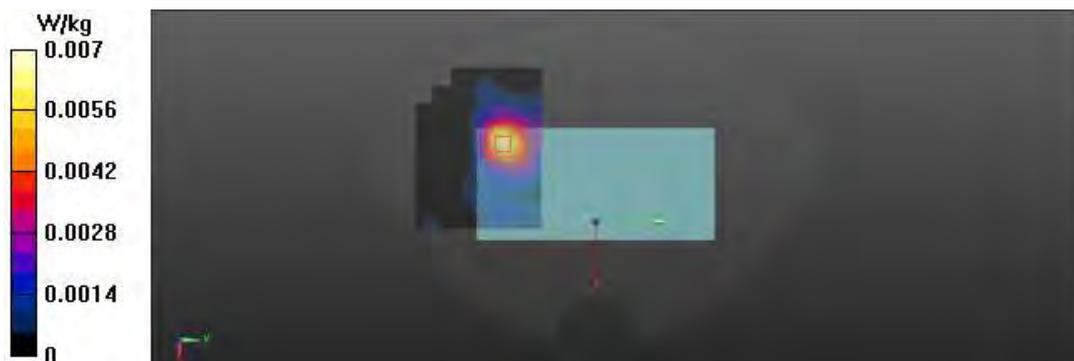

#39

Date: 1/13/2020

Test Laboratory: KCTL Inc.

File Name: [3.GSM850 Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, GSM850_4TX (0); Frequency: 836.8 MHz; Duty Cycle: 1:2.07491
Medium parameters used: $f = 836.8$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.361$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.43, 9.43, 9.43) @ 836.8 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);


Configuration/GSM850_GPRS 4Tx_CH190_Rear_10 mm/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.350 W/kg**Configuration/GSM850_GPRS 4Tx_CH190_Rear_10 mm/Zoom Scan (6x6x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.04 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.225 W/kg

Ratio of SAR at M2 to SAR at M1 = 73.5%

Maximum value of SAR (measured) = 0.347 W/kg

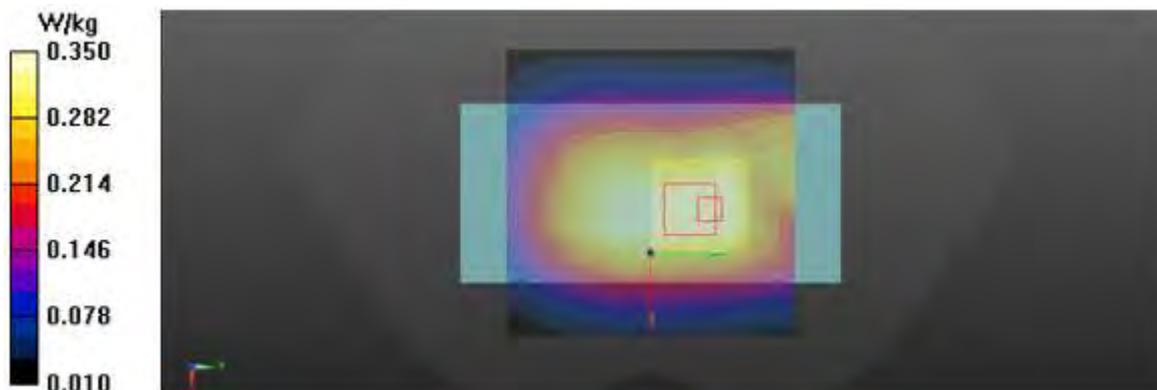

#40

. Date: 1/7/2020

Test Laboratory: KCTL Inc.

File Name: [3.GSM1900 Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, GSM 1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 39.635$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.13, 8.13, 8.13) @ 1880 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/GSM1900_GPRS 4Tx_CH661_Rear_10 mm/Area Scan (9x9x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.529 W/kg

Configuration/GSM1900_GPRS 4Tx_CH661_Rear_10 mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.861 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.751 W/kg

SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.174 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 44.5%

Maximum value of SAR (measured) = 0.573 W/kg



#41

Date: 1/6/2020

Test Laboratory: KCTL Inc.

File Name: [3.WCDMA FDD II Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, W-CDMA 1900 (Band 2) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 39.626$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.13, 8.13, 8.13) @ 1880 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/WCDMA FDD II_CH9400_Rear_10 mm/Area Scan (9x9x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.999 W/kg

Configuration/WCDMA FDD II_CH9400_Rear_10 mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.67 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.663 W/kg; SAR(10 g) = 0.337 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.2%

Maximum value of SAR (measured) = 1.09 W/kg



#42

Date: 1/8/2020

Test Laboratory: KCTL Inc.

File Name: [3.WCDMA FDD IV Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, W-CDMA 1750 (Band 4) (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 38.949$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.48, 8.48, 8.48) @ 1732.4 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/WCDMA FDD IV_CH1412_Rear_10 mm/Area Scan (9x9x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.897 W/kg

Configuration/WCDMA FDD IV_CH1412_Rear_10 mm/Zoom Scan (6x7x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.78 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.375 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 1.01 W/kg

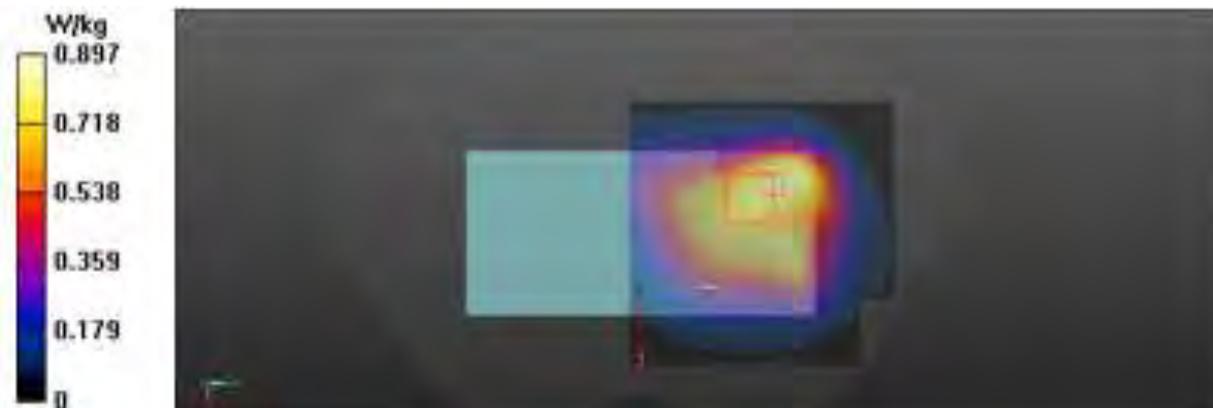

#43

Date: 1/13/2020

Test Laboratory: KCTL Inc.

File Name: [6.WCDMA FDD V Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, W-CDMA 850 (Band 5) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.366$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.43, 9.43, 9.43) @ 836.6 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/WCDMA FDD V_CH4183_Rear_10 mm/Area Scan (9x9x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.410 W/kg

Configuration/WCDMA FDD V_CH4183_Rear_10 mm/Zoom Scan (6x6x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 22.10 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.452 W/kg

SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.267 W/kg

Ratio of SAR at M2 to SAR at M1 = 76.4%

Maximum value of SAR (measured) = 0.415 W/kg

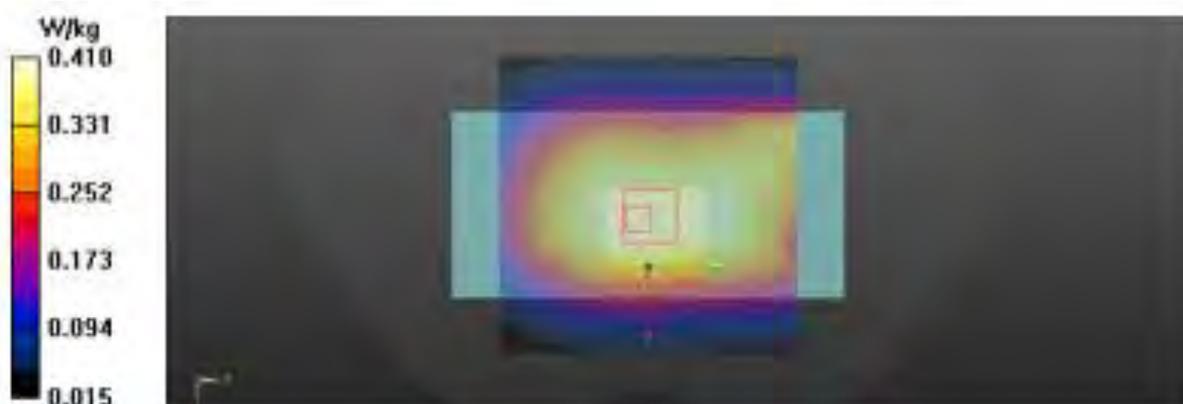

#44

Date: 1/6/2020

Test Laboratory: KCTL Inc.

File Name: **6.LTE Band 2 QPSK 20 MHz Hotspot.da53:0****DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, LTE Band 2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 39.626$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.13, 8.13, 8.13) @ 1880 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 2_QPSK_20 MHz_1RB_49offset_CH18900_Rear_10 mm/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.931 W/kg**Configuration/LTE Band 2_QPSK_20 MHz_1RB_49offset_CH18900_Rear_10 mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.12 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 1.20 W/kg
SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.301 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 47.2%
Maximum value of SAR (measured) = 0.945 W/kg

#45

Date: 1/8/2020

Test Laboratory: KCTL Inc.

File Name: [6.LTE Band 4 QPSK 20 MHz Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, LTE Band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 38.934$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(8.48, 8.48, 8.48) @ 1732.5 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 4_QPSK_20 MHz_1RB_49offset_CH20175_Rear_10 mm/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mmInfo: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.898 W/kg

Configuration/LTE Band 4_QPSK_20 MHz_1RB_49offset_CH20175_Rear_10 mm/Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.05 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.361 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.955 W/kg



#46

Date: 1/14/2020

Test Laboratory: KCTL Inc.

File Name: [3.LTE Band 5 QPSK 20 MHz Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.629$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(9.43, 9.43, 9.43) @ 836.5 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 5_QPSK_10 MHz_1RB_25offset_CH20525_Rear_10 mm/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.471 W/kg

Configuration/LTE Band 5_QPSK_10 MHz_1RB_25offset_CH20525_Rear_10 mm/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.73 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.884 W/kg

SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.239 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.700 W/kg



#47

Date: 2020-01-14

Test Laboratory: KCTL Inc.

File Name: [3.LTE Band 12 QPSK 10 MHz Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANZCZ**Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 42.468$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(9, 9, 9) @ 707.5 MHz; ; Calibrated: 2019-03-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: SAM twin SN1724; Type: QD000P40CD; Serial: TP:1724
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 12_QPSK_10 MHz_1RB_25offset_CH23095_Rear_10 mm/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.383 W/kg**Configuration/LTE Band 12_QPSK_10 MHz_1RB_25offset_CH23095_Rear_10 mm/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.32 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.518 W/kg
SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.134 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 47.6%
Maximum value of SAR (measured) = 0.393 W/kg

#48


Date: 2020-01-13

Test Laboratory: KCTL Inc.

File Name: [3.LTE Band 13 QPSK 10 MHz Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANZCZ**Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 43.223$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(9, 9, 9) @ 782 MHz; ; Calibrated: 2019-03-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: SAM twin SN1724; Type: QD000P40CD; Serial: TP:1724
- Measurement SW: DASY52, Version 52.10 (3);

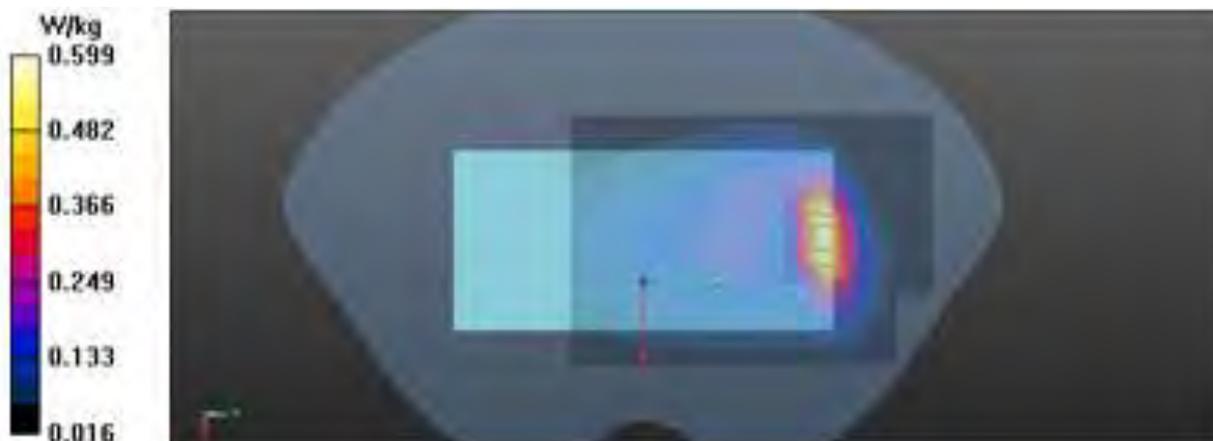Configuration/LTE Band 13_QPSK_10 MHz_1RB_0offset_CH23230_Rear_10 mm/Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.576 W/kg**Configuration/LTE Band 13_QPSK_10 MHz_1RB_0offset_CH23230_Rear_10 mm/Zoom Scan (6x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 12.90 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 0.775 W/kg
SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.190 W/kg
Smallest distance from peaks to all points 3 dB below = 9.3 mm
Ratio of SAR at M2 to SAR at M1 = 48.9%
Maximum value of SAR (measured) = 0.599 W/kg

#49

Date: 2020-01-14

Test Laboratory: KCTL Inc.

File Name: [3.LTE Band 17 QPSK 10 MHz Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANZCZ**

Communication System: UID 0, LTE Band 17 (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 42.371$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(9, 9, 9) @ 710 MHz; ; Calibrated: 2019-03-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: SAM twin SN1724; Type: QD000P40CD; Serial: TP:1724
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 17_QPSK_10 MHz_1RB_25offset_CH23790_Rear_10 mm/Area**Scan (7x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.355 W/kg

Configuration/LTE Band 17_QPSK_10 MHz_1RB_25offset_CH23790_Rear_10 mm/Zoom**Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.26 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.133 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 47.6%

Maximum value of SAR (measured) = 0.399 W/kg

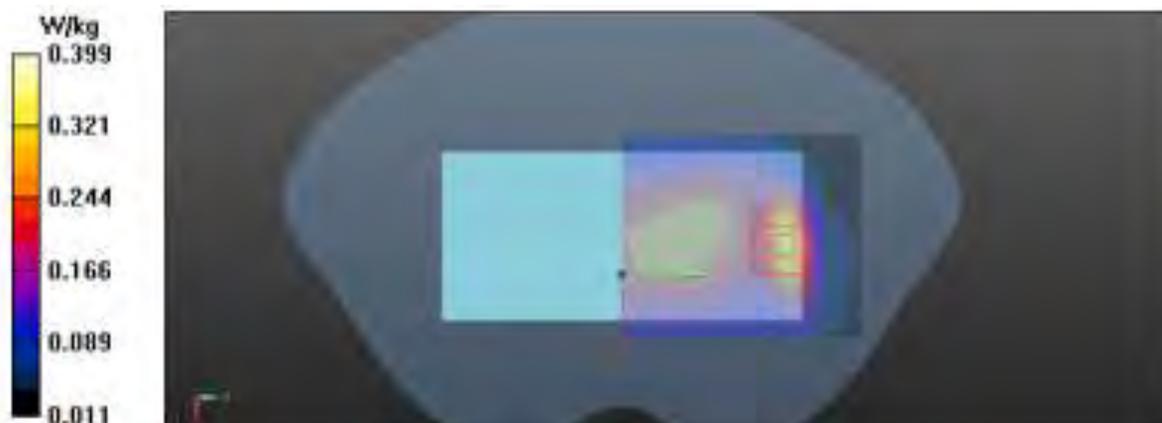

#50

Date: 1/14/2020

Test Laboratory: KCTL Inc.

File Name: [6.LTE Band 26 QPSK 20 MHz Hotspot.da53:0](#)**DUT:** SM-M315F/DS, **Type:** Mobile Phone, **Serial:** R38MC0ANYYECommunication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.687$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(9.43, 9.43, 9.43) @ 831.5 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 26_QPSK_15 MHz_1RB_0offset_CH26865_Rear_10 mm/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.400 W/kg**Configuration/LTE Band 26_QPSK_15 MHz_1RB_0offset_CH26865_Rear_10 mm/Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.83 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.649 W/kg
SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.178 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 51.9%
Maximum value of SAR (measured) = 0.512 W/kg

#51

Date: 2020-01-09

Test Laboratory: KCTL Inc.

File Name: **3.LTE Band 41 QPSK 20 MHz Hotspot.da53:0****DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANZCZ**Communication System: UID 0, LTE Band 41 (0); Frequency: 2680 MHz; Duty Cycle: 1:1.58016
Medium parameters used: $f = 2680$ MHz; $\sigma = 2.023$ S/m; $\epsilon_r = 38.379$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(7.68, 7.68, 7.68) @ 2680 MHz; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1567; Calibrated: 2019-02-05
- Phantom: Twin-SAM V4.0 #1; Type: QD 000 P40 CC; Serial: 1363
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 41_QPSK_20 MHz_1RB_49offset_CH41490_Rear_10 mm/Area Scan (10x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.799 W/kg**Configuration/LTE Band 41_QPSK_20 MHz_1RB_49offset_CH41490_Rear_10 mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 20.63 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.11 W/kg
SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.207 W/kg
Smallest distance from peaks to all points 3 dB below = 10.8 mm
Ratio of SAR at M2 to SAR at M1 = 41%
Maximum value of SAR (measured) = 0.846 W/kg

#52

Date: 1/9/2020

Test Laboratory: KCTL Inc.

File Name: [3.LTE Band 66 QPSK 20 MHz Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, LTE Band 66 (0); Frequency: 1770 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1770$ MHz; $\sigma = 1.428$ S/m; $\epsilon_r = 38.94$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(8.48, 8.48, 8.48) @ 1770 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn666; Calibrated: 1/25/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/LTE Band 66_QPSK_20 MHz_1RB_0offset_CH132572_Rear_10 mm/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.825 W/kg**Configuration/LTE Band 66_QPSK_20 MHz_1RB_0offset_CH132572_Rear_10 mm/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.84 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.11 W/kg
SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.300 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 47.6%
Maximum value of SAR (measured) = 0.879 W/kg

#53

Date: 1/22/2020

Test Laboratory: KCTL Inc.

File Name: [3. 2.4G 802.11b Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, 2.4GWLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 38.714$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(7.46, 7.46, 7.46) @ 2437 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 b_CH6_Rear_10 mm/Area Scan (10x8x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.486 W/kg

Configuration/802.11 b_CH6_Rear_10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.229 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 40.3%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.552 W/kg



#54

Date: 1/17/2020

Test Laboratory: KCTL Inc.

File Name: [4. 5.2G 802.11a Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, 5GWLAN (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.785$ S/m; $\epsilon_r = 35.708$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(5.4, 5.4, 5.4) @ 5240 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 a_CH48_Rear_10 mm/Area Scan (11x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.885 W/kg

Configuration/802.11 a_CH48_Rear_10 mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.81 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.138 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 0.926 W/kg

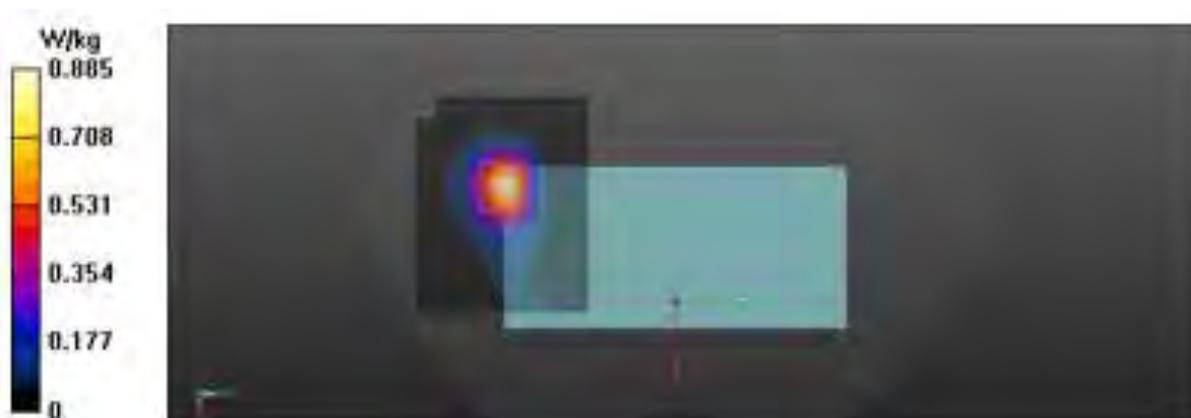

#55

Date: 1/21/2020

Test Laboratory: KCTL Inc.

File Name: [3. 5.8G 802.11a Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, 5GWLAN (0); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.339$ S/m; $\epsilon_r = 35.508$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(4.7, 4.7, 4.7) @ 5745 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 a_CH149_Rear_10 mm/Area Scan (11x9x1): Measurement grid:
dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.11 W/kg

Configuration/802.11 a_CH149_Rear_10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid:
dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.36 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 0.861 W/kg; SAR(10 g) = 0.300 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 2.10 W/kg



#56

Date: 1/22/2020

Test Laboratory: KCTL Inc.

File Name: [6. Bluetooth GFSK DH1 Hotspot.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**Communication System: UID 0, Bluetooth DH1 (0); Frequency: 2402 MHz; Duty Cycle: 1:3.43637
Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.746$ S/m; $\epsilon_r = 38.824$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540; ConvF(7.46, 7.46, 7.46) @ 2402 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Left_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/Bluetooth_GFSK_DH1_CH1_Rear_10 mm/Area Scan (10x8x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0158 W/kg

Configuration/Bluetooth_GFSK_DH1_CH1_Rear_10 mm/Zoom Scan (8x8x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.306 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.0610 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00389 W/kg

Ratio of SAR at M2 to SAR at M1 = 40.1%

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0200 W/kg

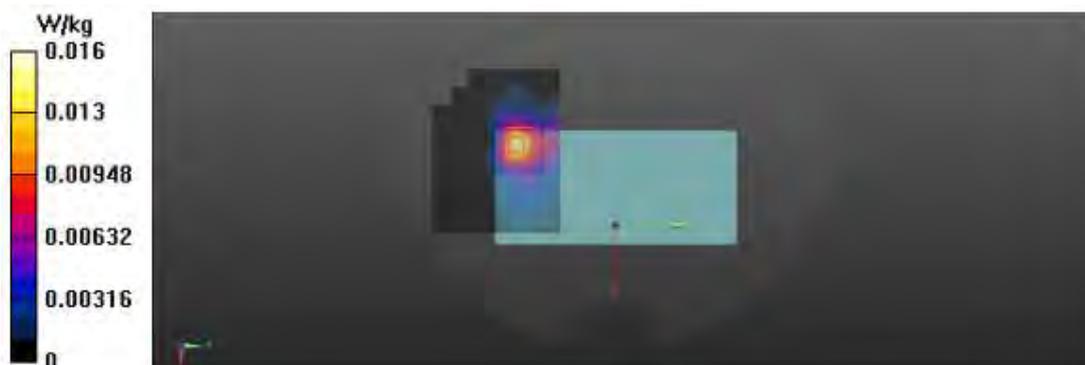

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIA002-004/2

#57

Date: 1/17/2020

Test Laboratory: KCTL Inc.

File Name: [3. 5.3G 802.11a Phablet.da53:0](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, 5GWLAN (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.86$ S/m; $\epsilon_r = 35.591$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(5.15, 5.15, 5.15) @ 5260 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 a_CH52_Rear_0 mm/Area Scan (11x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 6.24 W/kg

Configuration/802.11 a_CH52_Rear_0 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 30.99 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 14.3 W/kg

SAR(1 g) = 2.84 W/kg; SAR(10 g) = 0.683 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.5%

Maximum value of SAR (measured) = 8.17 W/kg

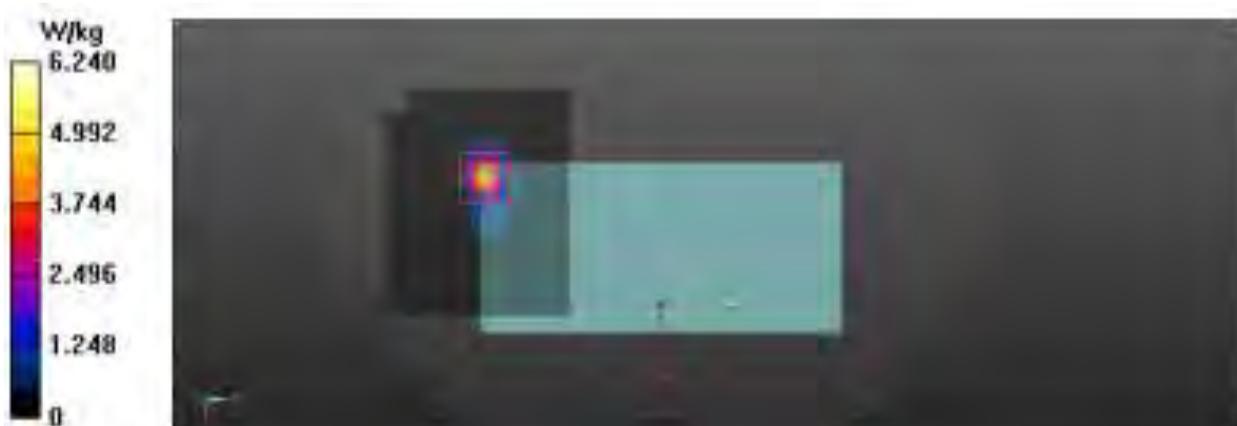

#58

Date: 1/20/2020

Test Laboratory: KCTL Inc.

File Name: [3. 5.6G 802.11a Phablet.da53:2](#)**DUT: SM-M315F/DS, Type: Mobile Phone, Serial: R38MC0ANYYE**

Communication System: UID 0, 5GWLAN (0); Frequency: 5720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5720$ MHz; $\sigma = 5.351$ S/m; $\epsilon_r = 35.539$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7540;ConvF(4.7, 4.7, 4.7) @ 5720 MHz; Calibrated: 7/22/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1586; Calibrated: 7/16/2019
- Phantom: Back_Right_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1975
- Measurement SW: DASY52, Version 52.10 (3);

Configuration 3/802.11 a_CH144_Top_0 mm/Area Scan (10x13x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 12.4 W/kg

Configuration 3/802.11 a_CH144_Top_0 mm/Zoom Scan (8x8x7)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 18.70 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 50.6 W/kg

SAR(1 g) = 6.53 W/kg; SAR(10 g) = 1.39 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 52.6%

Maximum value of SAR (measured) = 23.1 W/kg

