

FCC UNII REPORT

Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: May 25, 2023
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	Test Site/Location: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
	Report No.: HCT-RF-2305-FC101

FCC ID:	A3LSMM346B
APPLICANT:	SAMSUNG Electronics Co., Ltd.
Model:	SM-M346B/DS
Additional Model:	-
EUT Type:	Mobile Phone
Modulation type	OFDM
FCC Classification:	Unlicensed National Information Infrastructure(NII)
FCC Rule Part(s):	Part 15.407

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2305-FC101

REVIEWED BY



Report prepared by : Chang Hee Hwang
Engineer of Telecommunication Testing Center

Report approved by : Kwon Jeong
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC101	May 25, 2023	- First Approval Report

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
EUT DESCRIPTION	5
2. MAXIMUM OUTPUT POWER.....	6
3. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	7
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION.....	8
5. FACILITIES AND ACCREDITATIONS	8
5.1 FACILITIES	8
5.2 EQUIPMENT	8
6. ANTENNA REQUIREMENTS	8
7. MEASUREMENT UNCERTAINTY	9
8. DESCRIPTION OF TESTS.....	10
9. SUMMARY OF TEST RESULTS	27
10. TEST RESULT	28
10.1 DUTY CYCLE.....	28
10.2 26 dB Bandwidth	31
10.3 6 dB BANDWIDTH	40
10.4 OUTPUT POWER MEASUREMENT.....	42
10.5 POWER SPECTRAL DENSITY	46
10.6 FREQUENCY STABILITY	55
10.6.1 80 MHz BW.....	55
10.7 STRADDLE CHANNEL	71
10.7.1 26 dB Bandwidth	71
10.7.2 6 dB Bandwidth	74
10.7.3 Output Power.....	77
10.7.4 Power Spectral Density	80
10.8 RADIATED SPURIOUS EMISSIONS.....	83
10.9 RADIATED RESTRICTED BAND EDGE	92
10.10 POWERLINE CONDUCTED EMISSIONS	111
11. LIST OF TEST EQUIPMENT	112
12. ANNEX A_ TEST SETUP PHOTO.....	114

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	SM-M346B/DS	
Additional Model	-	
EUT Type	Mobile Phone	
Power Supply	DC 4.2 V	
Modulation Type	OFDM : 802.11a, 802.11n, 802.11ac	
Frequency Range (MHz)	U-NII-1	20 MHz BW : 5180 - 5240 40 MHz BW : 5190 - 5230 80 MHz BW : 5210
	U-NII-2A	20 MHz BW : 5260 - 5320 40 MHz BW : 5270 - 5310 80 MHz BW : 5290
	U-NII-2C	20 MHz BW : 5500 - 5720 40 MHz BW : 5510 - 5710 80 MHz BW : 5530 - 5690
	U-NII-3	20 MHz BW : 5745 - 5825 40 MHz BW : 5755 - 5795 80 MHz BW : 5775
Straddle channel	Supported	
TDWR Band	Supported	
Dynamic Frequency Selection	Slave without radar detection	
Date(s) of Tests	April 18, 2023 ~ May 25, 2023	
Serial number	Radiated : R3CW403A3NK Conducted : R3CW403A60L	

2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Band	Mode	Power	
		(dBm)	(W)
UNII1	802.11a	15.67	0.037
	802.11n (HT20)	15.43	0.035
	802.11n (HT40)	12.94	0.020
	802.11ac (VHT20)	15.38	0.035
	802.11ac (VHT40)	13.28	0.021
	802.11ac (VHT80)	8.58	0.007
UNII2A	802.11a	16.00	0.040
	802.11n (HT20)	15.44	0.035
	802.11n (HT40)	13.10	0.020
	802.11ac (VHT20)	15.52	0.036
	802.11ac (VHT40)	13.47	0.022
	802.11ac (VHT80)	8.06	0.006
UNII2C	802.11a	16.12	0.041
	802.11n (HT20)	15.81	0.038
	802.11n (HT40)	13.47	0.022
	802.11ac (VHT20)	15.61	0.036
	802.11ac (VHT40)	13.49	0.022
	802.11ac (VHT80)	12.22	0.017
UNII3	802.11a	15.45	0.035
	802.11n (HT20)	15.22	0.033
	802.11n (HT40)	13.96	0.025
	802.11ac (VHT20)	15.25	0.033
	802.11ac (VHT40)	13.36	0.022
	802.11ac (VHT80)	12.41	0.017

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E" and ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices' were used in the measurement.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203, §15.407:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203, §15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

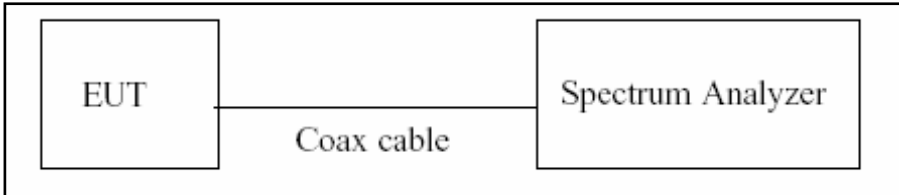

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

8.2. 6 dB Bandwidth & 26 dB Bandwidth

Limit

Within the 5.725-5.85 GHz(NII-3), the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Configuration

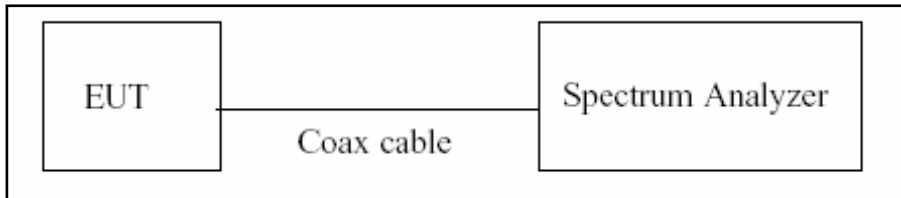

Test Procedure(26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW $\geq 3 \times$ RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.


8.3. Output Power Measurement

Limit


Band	Limit
UNII 1	- Master : Not exceed 1 W(=30 dBm) - Slave : Not exceed 250 mW(=23.98 dBm)
UNII 2A, 2C	Not exceed the lesser of 250 mW or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)
UNII 3	Not exceed 1 W(=30 dBm)

Test Configuration

Power Meter

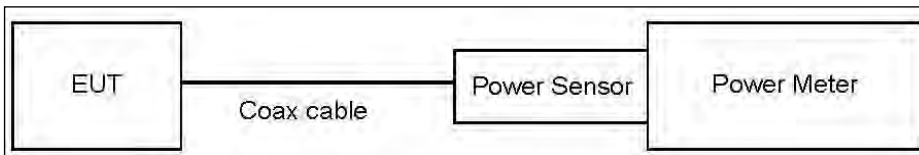

Spectrum Analyzer(Only Straddle Channel)

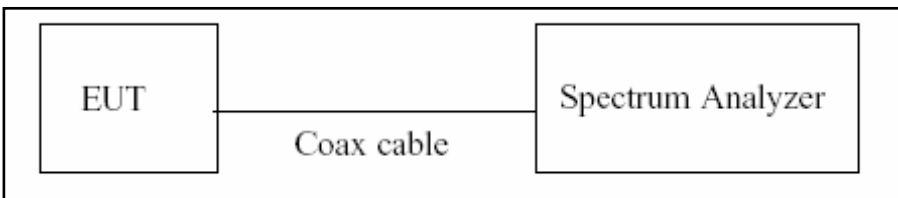

Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test Procedure (Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW \geq 3 MHz.
5. Number of points in sweep \geq 2 x span/RBW.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured Levels are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset Loss = Attenuator loss(10 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	11.87
UNII 2A	11.87
UNII 2C	11.87
UNII 3	11.87


(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density

Limit

Band	Limit
UNII 1	11 dBm/MHz
UNII 2A, 2C	11 dBm/MHz
UNII 3	30 dBm/500 kHz

Test Configuration

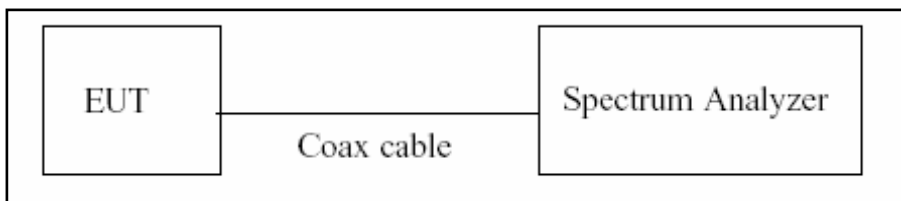

Test Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz (510 kHz for UNII 3)
3. VBW ≥ 3 MHz
4. Number of points in sweep ≥ 2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add 10 log(1/x), where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured Levels are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset Loss = Attenuator loss(10 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	11.87
UNII 2A	11.87
UNII 2C	11.87
UNII 3	11.87


(Actual value of loss for the attenuator and cable combination)

8.5. Frequency Stability

Limit

Maintained within the band

Test Configuration

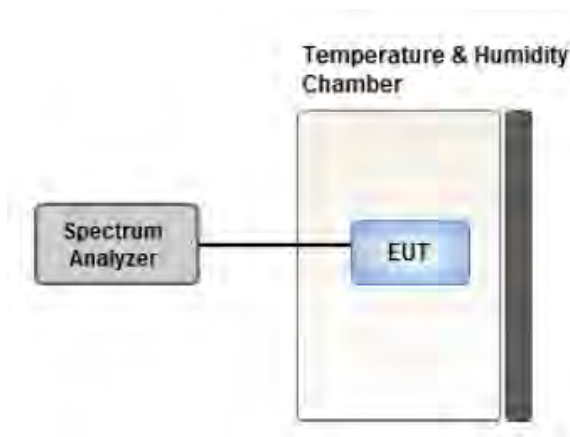

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

8.6. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

8.7. Radiated Test


Limit

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.
3. UNII 3: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
4. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

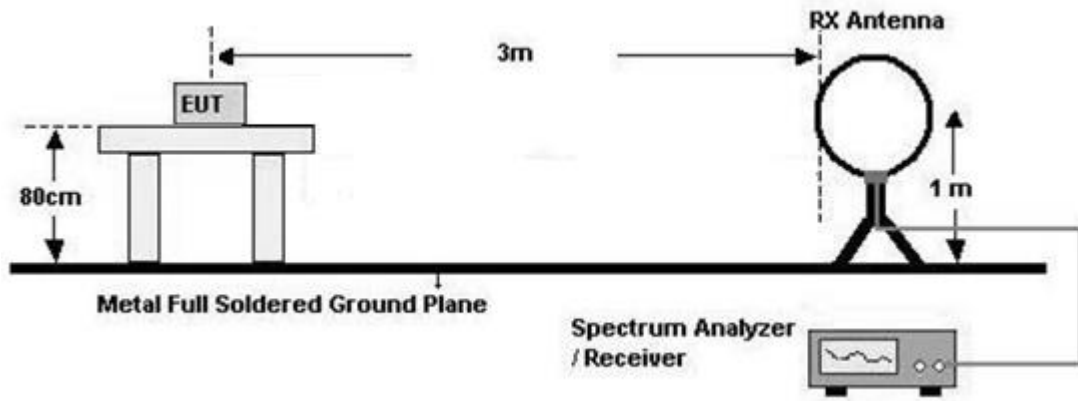

30 MHz - 1 GHz

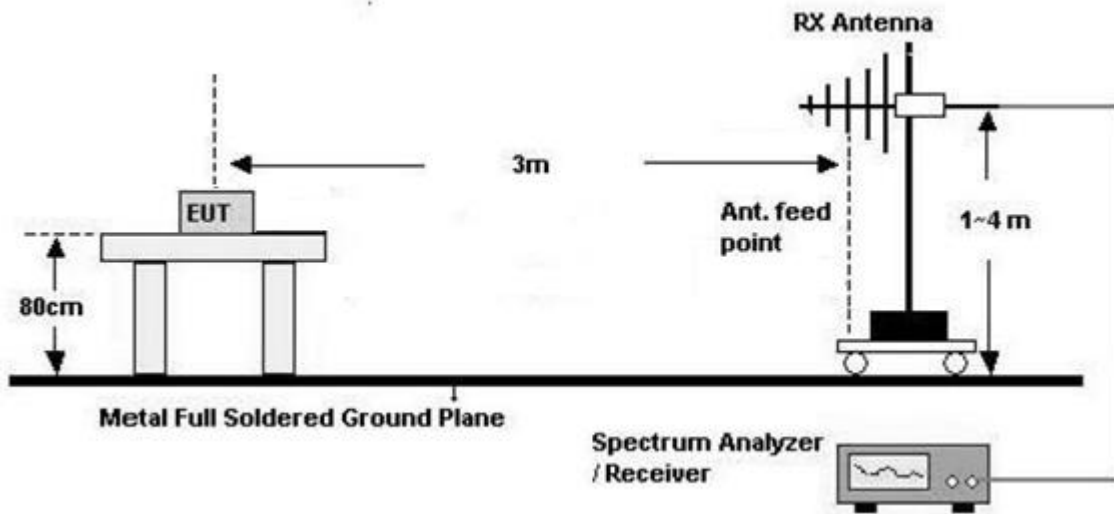

Above 1 GHz

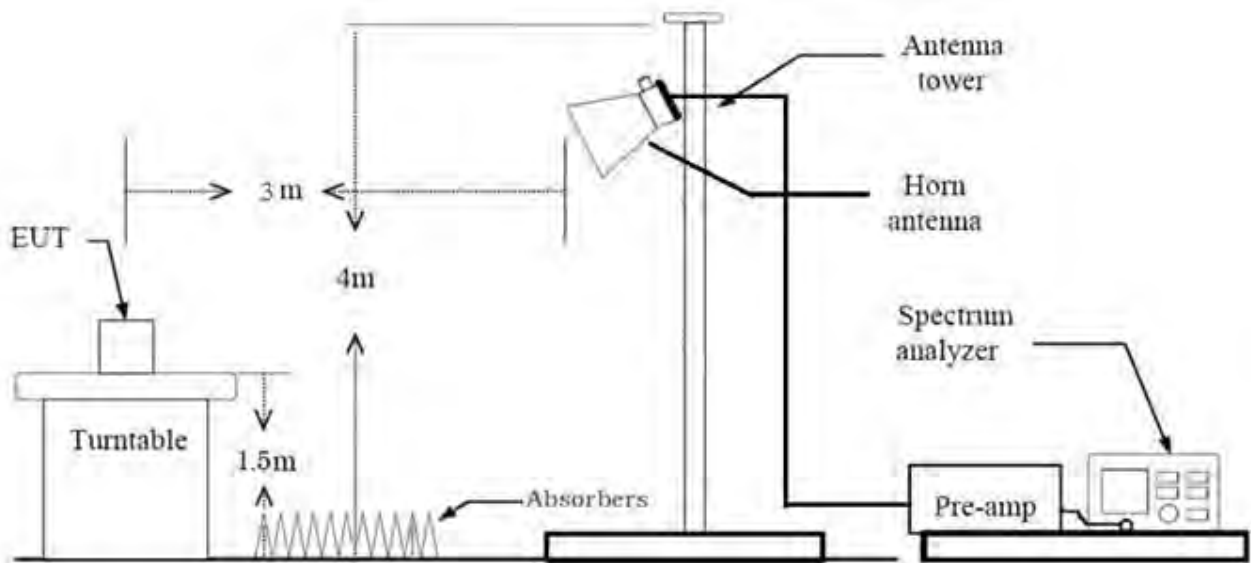**Test Procedure of Radiated spurious emissions (Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
- ※ In general, (1) is used mainly
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type (Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 %) = $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is $<$ 98 %) = $VBW \geq 1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 % duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
12. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 %) = $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 %) = $VBW \geq 1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 % duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

9. Measured Frequency Range :

- 4 500 MHz ~ 5 150 MHz
- 5 350 MHz ~ 5 460 MHz
- 5 460 MHz ~ 5 470 MHz
- (75 MHz or more below the 5 725 MHz) ~ 5 725 MHz
- 5 850 MHz ~ (75 MHz or more above the 5 850 MHz)

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Attenuator(ATT)
+ Distance Factor(D.F)

The actual setting value of VBW

Mode	Worst Data rate (Mbps)	Duty Cycle	Duty Cycle Factor (dB)	The actual setting value of VBW (Hz)
802.11a	6	0.947	0.236	1 000
802.11n(HT20)	MCS0	0.932	0.308	1 000
802.11n(HT40)	MCS0	0.880	0.553	3 000
802.11ac(VHT20)	MCS0	0.933	0.300	1 000
802.11ac(VHT40)	MCS0	0.881	0.549	3 000
802.11ac(VHT80)	MCS0	0.789	1.031	5 000

8.8. Worst case configuration and mode**Radiated test**

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Z
 - Radiated Restricted Band Edge : X
3. All datarate of operation were investigated and the worst case datarate results are reported.
 - 802.11a : 6 Mbps
 - 802.11n_HT20 : MCS0
 - 802.11n_HT40 : MCS0
 - 802.11ac_VHT20 : MCS0
 - 802.11ac_VHT40 : MCS0
 - 802.11ac_VHT80 : MCS0
4. Radiated Spurious Emission
 - All modulation of operation were investigated and the worst case modulation results are reported.
(Worstcase : 802.11a_6 Mbps)
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

Radiated test(RSDB)

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone., etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Z
3. The following tables show the worst case configurations determined during testing.

Description	Bluetooth Emission	5 GHz Emission
Antenna	WIFI/BT	WIFI/BT
Channel	0	165
Data Rate	1 Mbps	6 Mbps
Mode	GFSK : DH5	802.11a

Note : Bluetooth RSDB Data refer to Bluetooth Test Report.

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter, Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter

Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26 dB Bandwidth	§15.407 (for Power Measurement)	N/A	Conducted	PASS
6 dB Bandwidth	§15.407(e)	> 500 kHz (5725-5850 MHz)(UNII-3)		PASS
Maximum Conducted Output Power	§15.407(a)(1),(2),(3)	< 250 mW(5150-5250 MHz) < 250 mW or 11+10log ₁₀ (BW) dBm (5250-5350 MHz) < 250 mW or 11+10log ₁₀ (BW) dBm (5470-5725 MHz) <1 W (5725-5850 MHz)		PASS
Maximum Power Spectral Density	§15.407(a)(1),(2),(3)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207 15.407(b)(9)	<FCC 15.207 limits		PASS
Frequency Stability	§15.407(g) §2.1055	Maintained within the band		PASS
Undesirable Emissions	§15.407(b) (1),(2),(3),(4)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) cf. Section 8.6 (UNII 3)	Radiated	PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(9),(10)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS

10. TEST RESULT

10.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11a	6	1.430	1.510	0.947	0.236
	9	0.958	1.049	0.913	0.395
	12	0.725	0.806	0.899	0.461
	18	0.491	0.583	0.843	0.739
	24	0.375	0.471	0.796	0.993
	36	0.253	0.355	0.714	1.461
	48	0.196	0.285	0.688	1.626
	54	0.177	0.269	0.660	1.802


Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11n (HT20)	0	1.333	1.431	0.932	0.308
	1	0.689	0.785	0.877	0.568
	2	0.471	0.573	0.823	0.846
	3	0.360	0.451	0.798	0.981
	4	0.253	0.345	0.735	1.335
	5	0.200	0.289	0.692	1.599
	6	0.182	0.274	0.667	1.761
	7	0.162	0.253	0.640	1.938
802.11n (HT40)	0	0.663	0.753	0.880	0.553
	1	0.355	0.441	0.805	0.944
	2	0.248	0.334	0.742	1.293
	3	0.198	0.294	0.672	1.724
	4	0.147	0.228	0.644	1.908
	5	0.116	0.195	0.595	2.256
	6	0.111	0.198	0.564	2.486
	7	0.101	0.182	0.556	2.553

Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11ac (VHT20)	0	1.344	1.440	0.933	0.300
	1	0.694	0.775	0.895	0.480
	2	0.476	0.567	0.839	0.761
	3	0.365	0.476	0.766	1.158
	4	0.263	0.370	0.712	1.473
	5	0.204	0.284	0.718	1.437
	6	0.187	0.279	0.673	1.722
	7	0.172	0.262	0.658	1.821
	8	0.152	0.241	0.631	2.002
802.11ac (VHT40)	0	0.668	0.758	0.881	0.549
	1	0.355	0.461	0.769	1.139
	2	0.248	0.355	0.700	1.549
	3	0.198	0.294	0.672	1.724
	4	0.152	0.238	0.638	1.950
	5	0.120	0.209	0.574	2.410
	6	0.111	0.198	0.564	2.486
	7	0.106	0.203	0.525	2.798
	8	0.097	0.185	0.524	2.804
	9	0.086	0.177	0.486	3.136
802.11ac (VHT80)	0	0.332	0.421	0.789	1.031
	1	0.187	0.294	0.638	1.952
	2	0.142	0.233	0.609	2.156
	3	0.117	0.203	0.575	2.403
	4	0.091	0.177	0.514	2.888
	5	0.080	0.169	0.473	3.248
	6	0.076	0.162	0.469	3.287
	7	0.071	0.157	0.452	3.452
	8	0.068	0.157	0.433	3.636
	9	0.061	0.152	0.400	3.979


Note:

In order to simplify the report, attached plots were only the lowest datarate.


802.11a

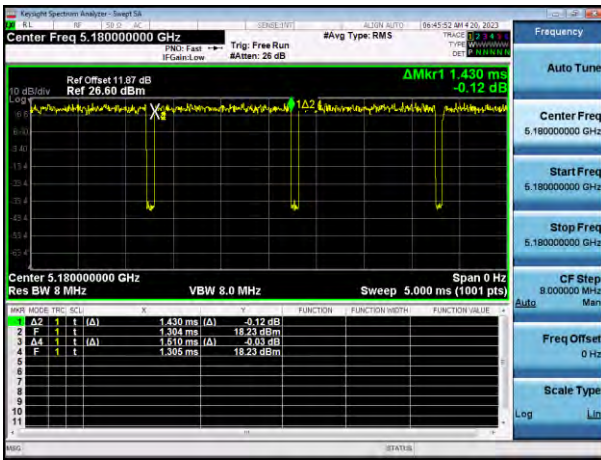


802.11n(HT20)

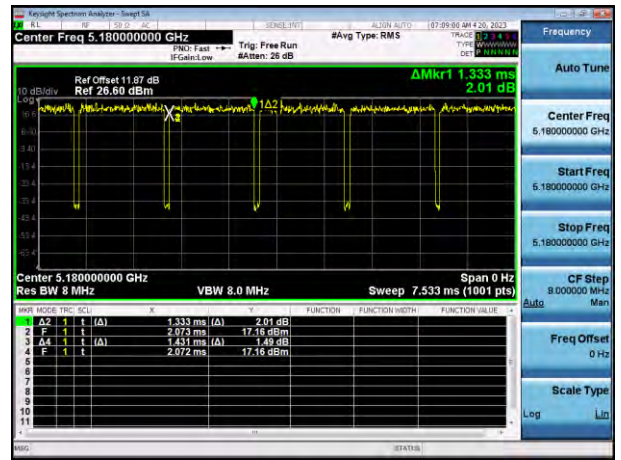


802.11n(HT40)

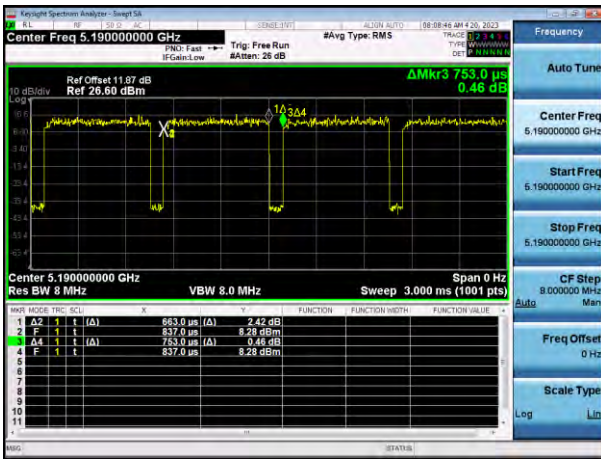


802.11ac(VHT20)

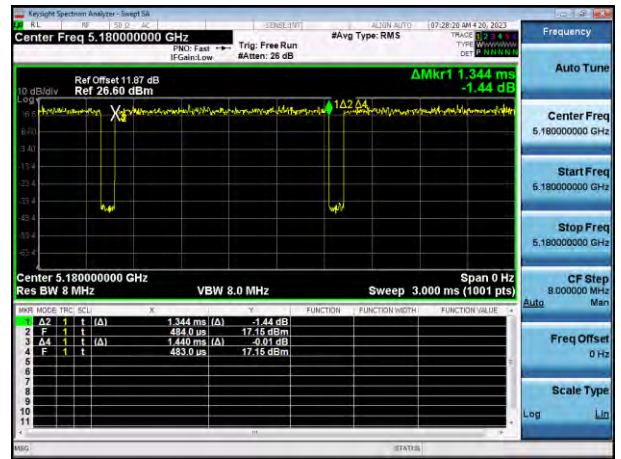

802.11ac(VHT40)

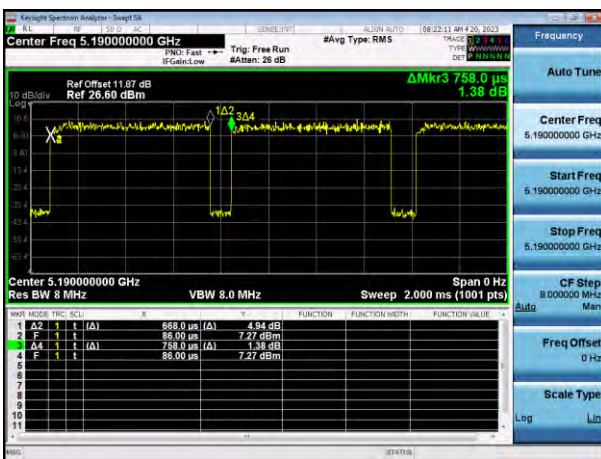

802.11ac(VHT80)

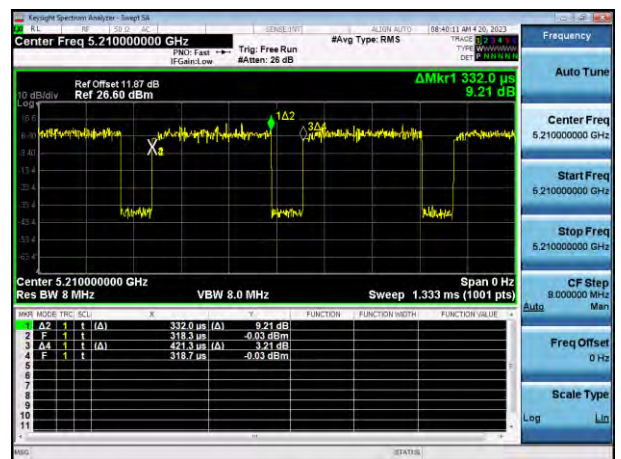

10.2 26 dB Bandwidth

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.7.1.

802.11a Mode		26dB Bandwidth [MHz]	99 % bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	22.69	17.425
5200	40	23.36	17.312
5240	48	22.57	17.229
5260	52	24.36	17.321
5300	60	24.38	17.557
5320	64	24.86	17.301
5500	100	22.26	17.199
5600	120	24.45	17.597
5720	144	27.93	18.031
5745	149	24.13	17.588
5785	157	25.54	17.512
5825	165	25.74	17.597

802.11n(HT20) Mode		26dB Bandwidth [MHz]	99 % bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	25.10	18.402
5200	40	28.96	18.538
5240	48	25.21	18.237
5260	52	27.02	18.576
5300	60	27.18	18.650
5320	64	25.01	18.664
5500	100	26.70	18.432
5600	120	25.13	18.458
5720	144	25.56	18.642
5745	149	28.95	18.617
5785	157	27.64	18.464
5825	165	27.22	18.649

802.11n(HT40) Mode		26dB Bandwidth [MHz]	99 % bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	42.57	37.005
5230	46	42.69	36.700
5270	54	42.52	36.821
5310	62	42.12	37.081
5510	102	41.42	37.000
5590	118	42.39	37.496
5710	142	41.29	36.995
5755	151	40.59	36.905
5795	159	41.94	36.852

802.11ac(VHT20) Mode		26 dB Bandwidth [MHz]	99 % bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	24.71	18.291
5200	40	27.50	18.520
5240	48	24.83	18.518
5260	52	25.37	18.483
5300	60	25.60	18.541
5320	64	25.02	18.620
5500	100	25.38	18.268
5600	120	28.23	18.537
5720	144	29.78	18.994
5745	149	26.57	18.566
5785	157	27.49	18.802
5825	165	28.72	18.833


802.11ac(VHT40) Mode		26 dB Bandwidth [MHz]	99 % bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	41.73	36.743
5230	46	43.90	36.720
5270	54	42.94	36.914
5310	62	41.79	36.940
5510	102	42.13	36.501
5590	118	42.43	37.067
5710	142	42.29	37.042
5755	151	45.63	37.053
5795	159	43.63	36.959

802.11ac(VHT80) Mode		26 dB Bandwidth [MHz]	99 % bandwidth [MHz]
Frequency [MHz]	Channel No.		
5210	42	81.24	75.053
5290	58	80.96	75.020
5530	106	82.15	75.136
5610	122	80.91	75.160
5690	138	81.82	75.191
5775	155	81.92	75.146

☐ Test Plots(802.11a)

Note:

In order to simplify the report, attached plots were only the widest channel.

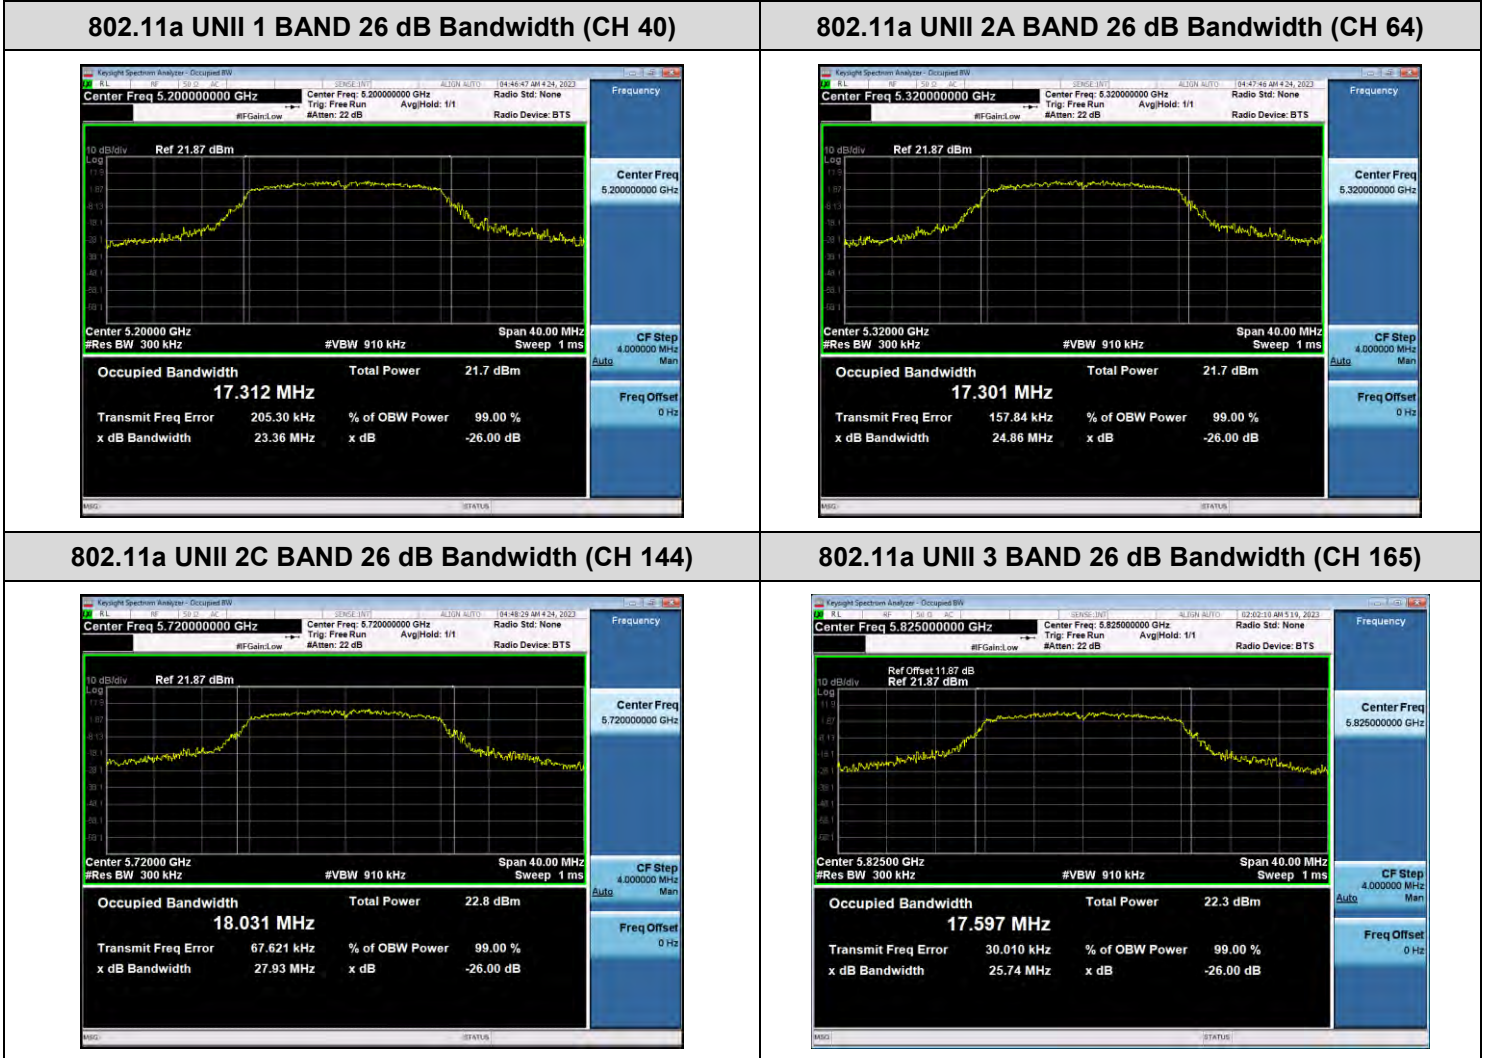

☐ Test Plots(802.11n(HT20))


Note:

In order to simplify the report, attached plots were only the widest channel.


802.11n_HT20 UNII 1 BAND 26 dB Bandwidth(CH 40)



802.11n_HT20 UNII 2A BAND 26 dB Bandwidth(CH 60)

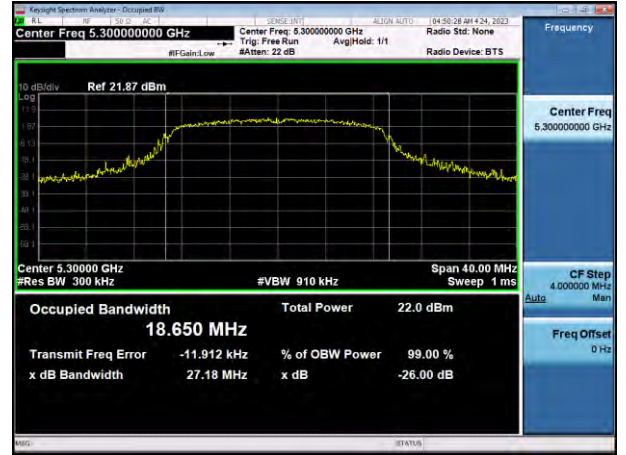

802.11n_HT20 UNII 2C BAND 26 dB Bandwidth(CH 100)

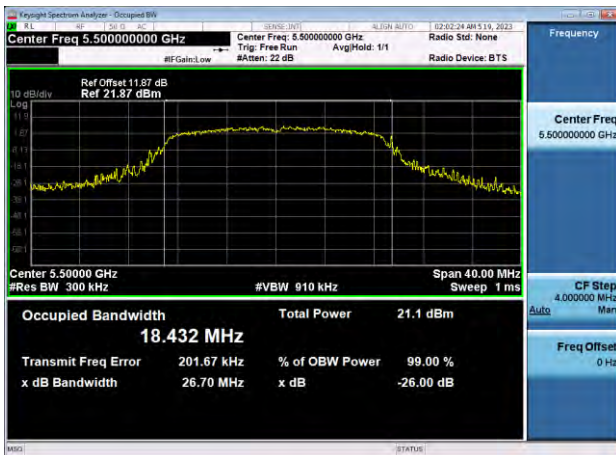


802.11n_HT20 UNII 3 BAND 26 dB Bandwidth(CH 149)



☐ Test Plots(802.11n(HT40))

Note:

In order to simplify the report, attached plots were only the widest channel.

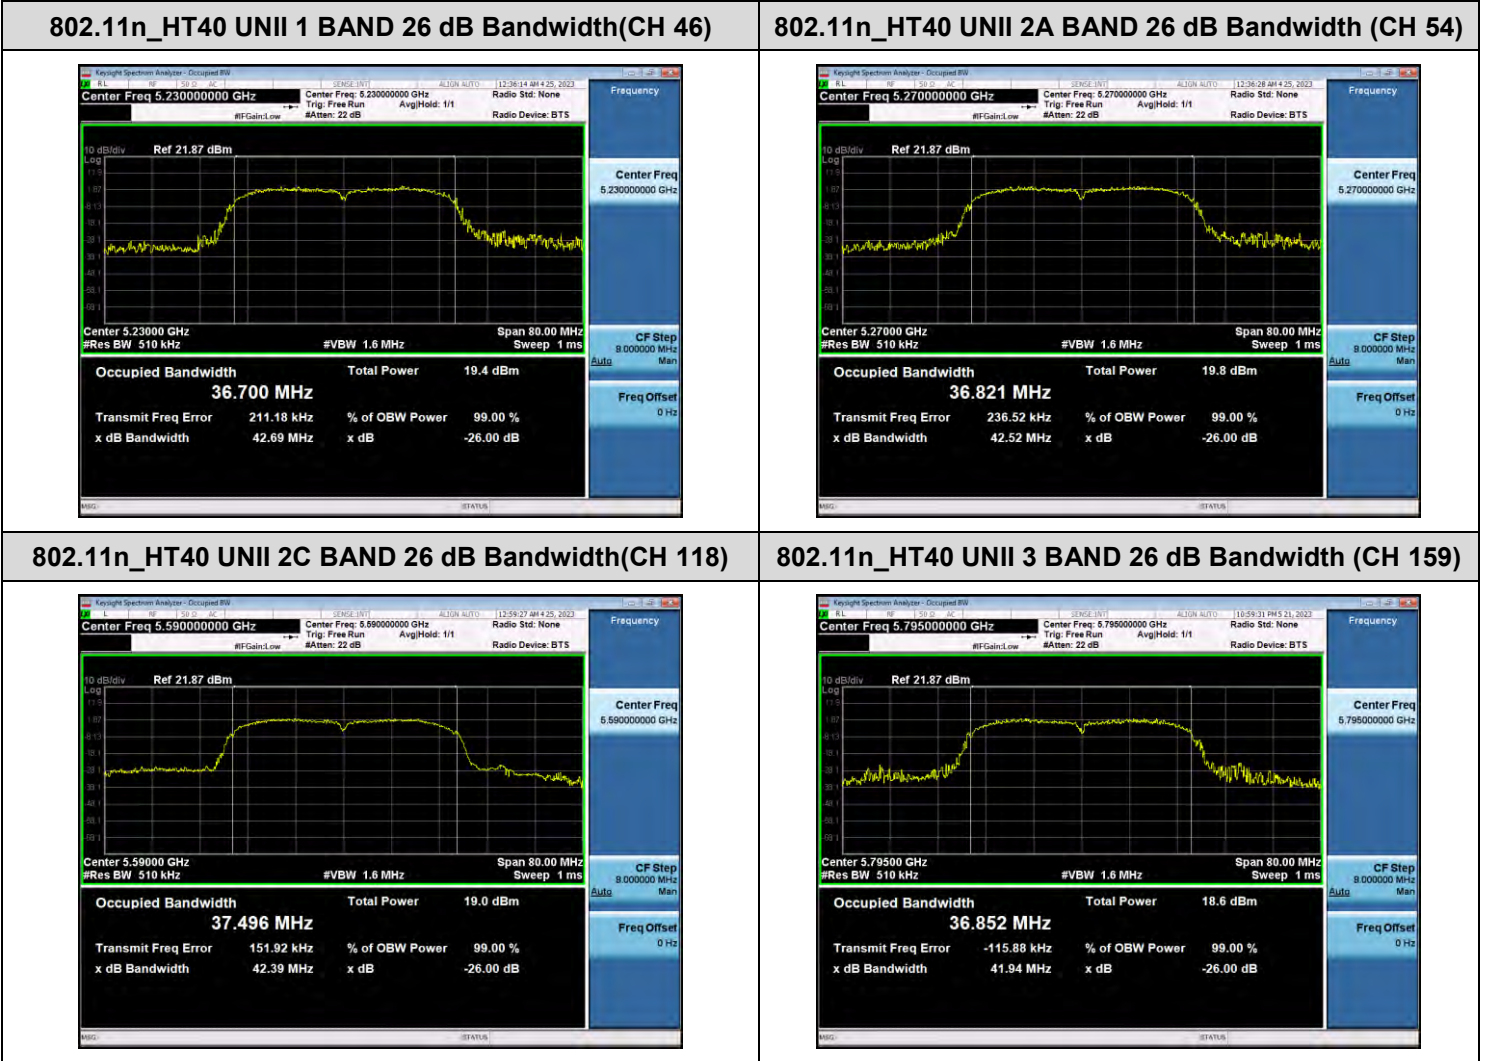


☐ Test Plots(802.11ac(VHT20))

Note:

In order to simplify the report, attached plots were only the widest channel.


802.11ac_VHT20 UNII 1 BAND 26 dB Bandwidth(CH 40)

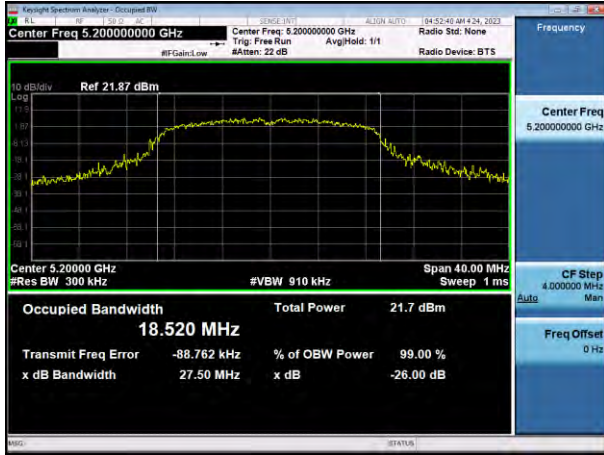

802.11ac_VHT20 UNII 2A BAND 26 dB Bandwidth(CH 60)



802.11ac_VHT20 UNII 2C BAND 26 dB Bandwidth(CH 144)

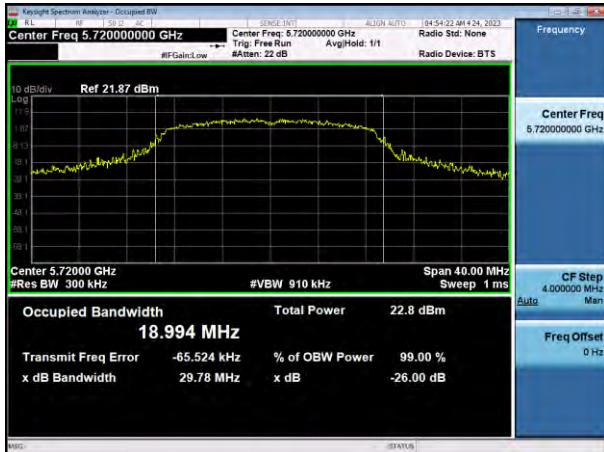


802.11ac_VHT20 UNII 3 BAND 26 dB Bandwidth(CH 165)



☐ Test Plots(802.11ac(VHT40))

Note:


In order to simplify the report, attached plots were only the widest channel.

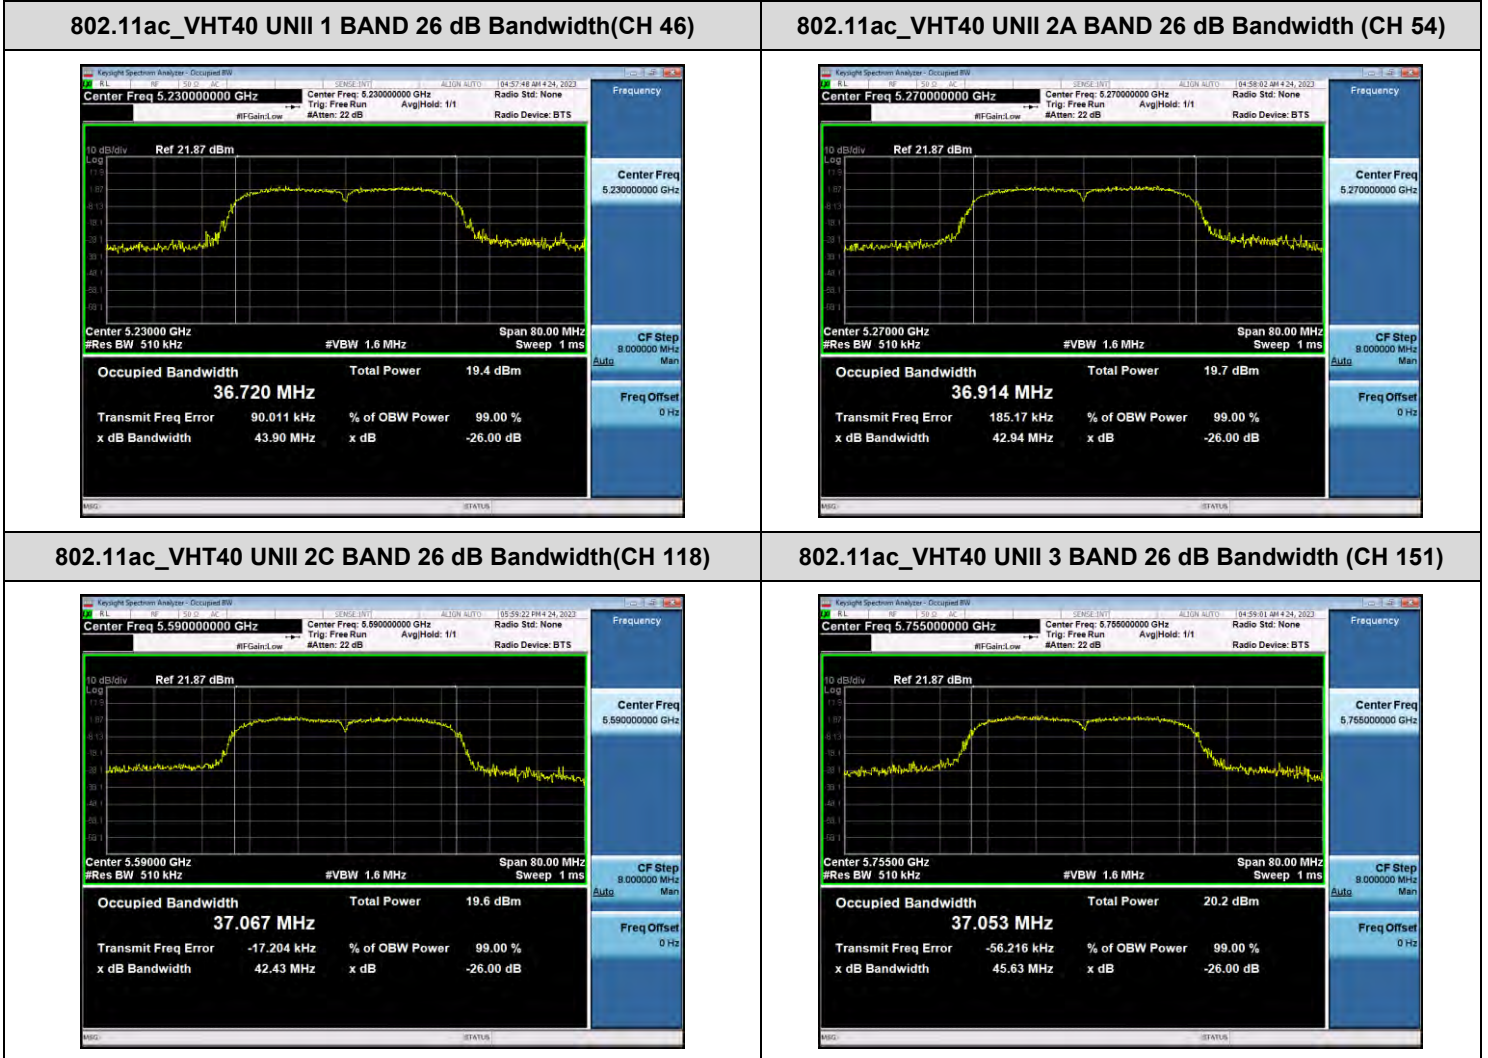

☐ Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only the widest channel.

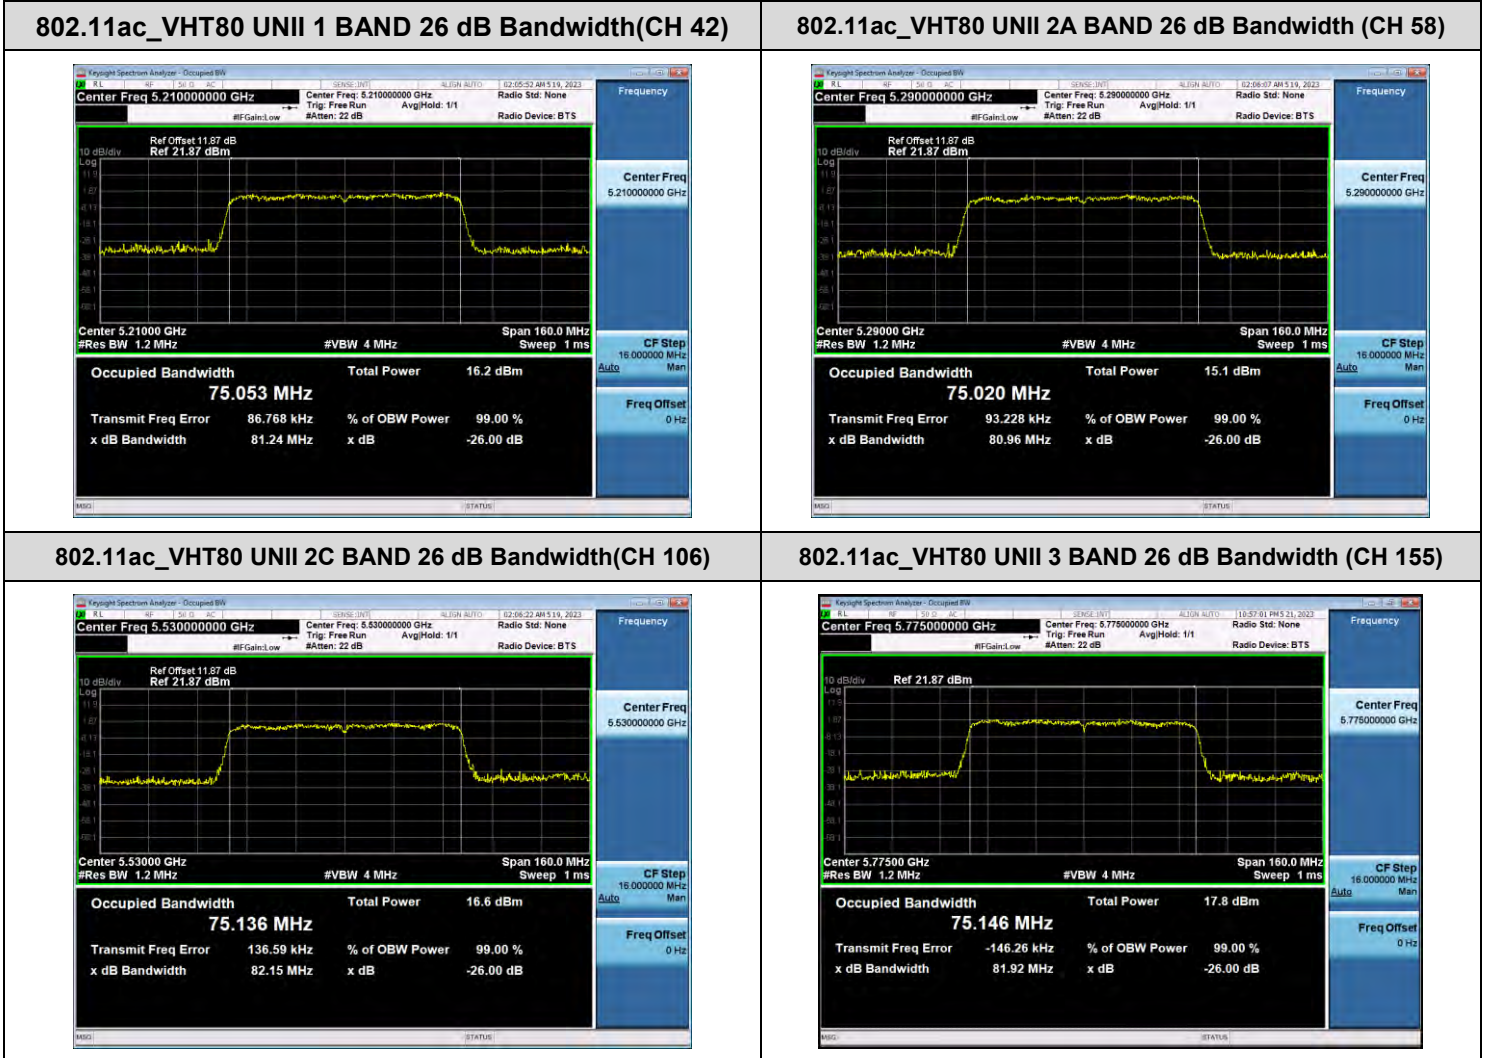

10.3 6 dB BANDWIDTH

802.11a Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	14.48	> 0.5	Pass
5785	157	15.11	> 0.5	Pass
5825	165	15.17	> 0.5	Pass

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	13.88	> 0.5	Pass
5785	157	14.76	> 0.5	Pass
5825	165	15.10	> 0.5	Pass

802.11n(HT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.09	> 0.5	Pass
5795	159	35.12	> 0.5	Pass

802.11ac(VHT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	15.10	> 0.5	Pass
5785	157	15.12	> 0.5	Pass
5825	165	15.09	> 0.5	Pass


802.11ac(VHT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.09	> 0.5	Pass
5795	159	35.12	> 0.5	Pass

802.11ac(VHT80) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	75.38	> 0.5	Pass


Test Plots

Note: In order to simplify the report, attached plots were only the narrowest channel.


802.11a (CH.149)

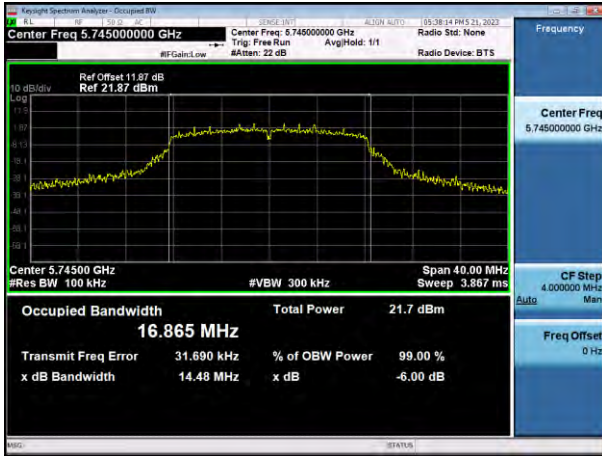


802.11n(HT20) (CH.149)

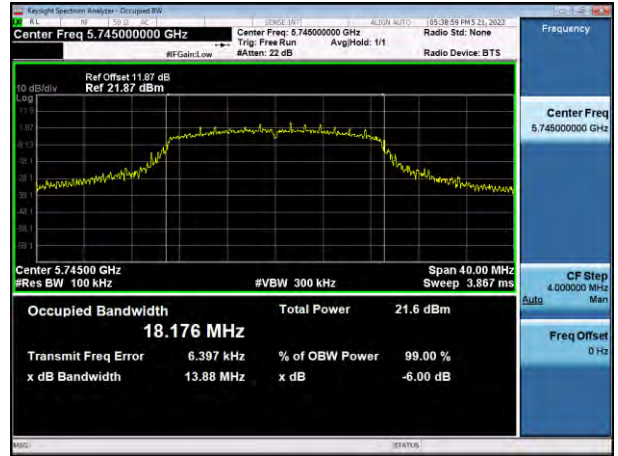


802.11n(HT40) (CH.151)

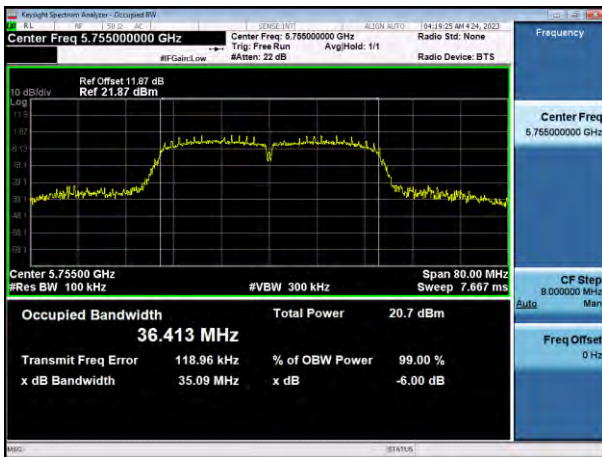


802.11ac(VHT20) (CH.165)

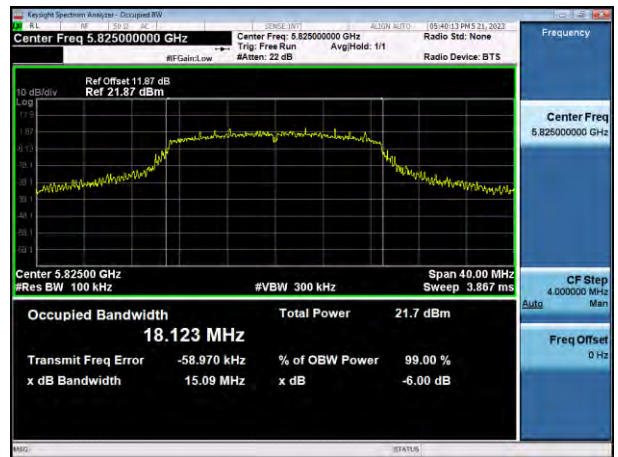

802.11ac(VHT40) (CH.151)

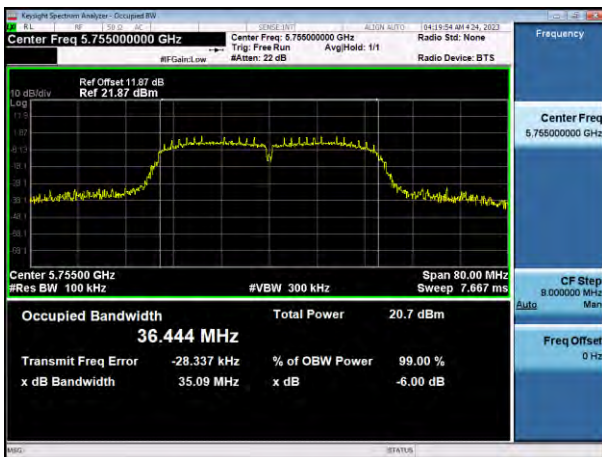

802.11ac(VHT80) (CH.155)

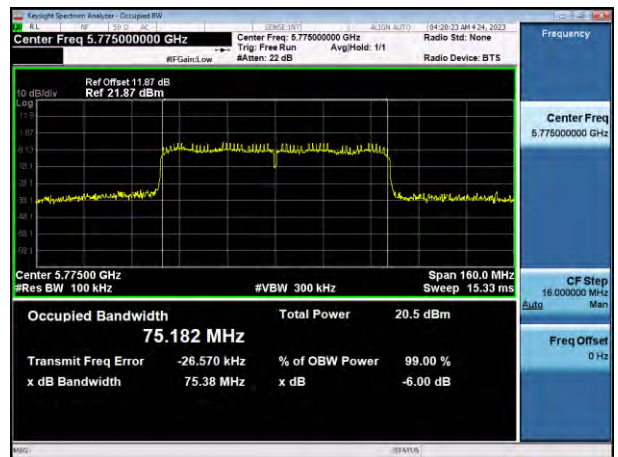

10.4 OUTPUT POWER MEASUREMENT

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.7.3.

Limit

(UNII 1) : 23.98 dBm

(UNII 2A, 2C) : 23.98 dBm or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)

(UNII 3) : 30.00 dBm

802.11a Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate [Mbps]
Frequency [MHz]	Channel No.					
5180	36	15.43	0.236	15.67	23.98	6M
5200	40	15.32	0.236	15.56	23.98	6M
5240	48	15.27	0.236	15.51	23.98	6M
5260	52	15.71	0.236	15.95	23.98	6M
5300	60	15.76	0.236	16.00	23.98	6M
5320	64	15.38	0.236	15.62	23.98	6M
5500	100	14.80	0.236	15.04	23.98	6M
5600	120	14.82	0.236	15.06	23.98	6M
5720	144	15.88	0.236	16.12	23.98	6M
5745	149	14.60	0.236	14.84	30.00	6M
5785	157	14.44	0.236	14.68	30.00	6M
5825	165	15.21	0.236	15.45	30.00	6M

802.11n(20 MHz) Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase MCS Index
Frequency [MHz]	Channel No.					
5180	36	15.11	0.308	15.42	23.98	MCS0
5200	40	15.12	0.308	15.43	23.98	MCS0
5240	48	14.75	0.308	15.06	23.98	MCS0
5260	52	15.05	0.308	15.36	23.98	MCS0
5300	60	15.13	0.308	15.44	23.98	MCS0
5320	64	14.78	0.308	15.09	23.98	MCS0
5500	100	14.72	0.308	15.03	23.98	MCS0
5600	120	14.70	0.308	15.01	23.98	MCS0
5720	144	15.50	0.308	15.81	23.98	MCS0
5745	149	14.41	0.308	14.72	30.00	MCS0
5785	157	14.23	0.308	14.54	30.00	MCS0
5825	165	14.91	0.308	15.22	30.00	MCS0

802.11n(40 MHz) Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase MCS Index
Frequency [MHz]	Channel No.					
5190	38	11.65	0.553	12.20	23.98	MCS0
5230	46	12.39	0.553	12.94	23.98	MCS0
5270	54	12.55	0.553	13.10	23.98	MCS0
5310	62	11.70	0.553	12.25	23.98	MCS0
5510	102	12.00	0.553	12.55	23.98	MCS0
5590	118	12.50	0.553	13.05	23.98	MCS0
5710	142	12.92	0.553	13.47	23.98	MCS0
5755	151	12.96	0.553	13.51	30.00	MCS0
5795	159	13.41	0.553	13.96	30.00	MCS0

802.11ac(20 MHz) Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase MCS Index
Frequency [MHz]	Channel No.					
5180	36	15.08	0.300	15.38	23.98	MCS0
5200	40	14.95	0.300	15.25	23.98	MCS0
5240	48	14.62	0.300	14.92	23.98	MCS0
5260	52	15.21	0.300	15.51	23.98	MCS0
5300	60	15.22	0.300	15.52	23.98	MCS0
5320	64	14.95	0.300	15.25	23.98	MCS0
5500	100	14.72	0.300	15.02	23.98	MCS0
5600	120	14.77	0.300	15.07	23.98	MCS0
5720	144	15.31	0.300	15.61	23.98	MCS0
5745	149	14.40	0.300	14.70	30.00	MCS0
5785	157	14.20	0.300	14.50	30.00	MCS0
5825	165	14.95	0.300	15.25	30.00	MCS0

802.11ac(40 MHz) Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase MCS Index
Frequency [MHz]	Channel No.					
5190	38	11.61	0.549	12.16	23.98	MCS0
5230	46	12.73	0.549	13.28	23.98	MCS0
5270	54	12.92	0.549	13.47	23.98	MCS0
5310	62	11.14	0.549	11.69	23.98	MCS0
5510	102	12.01	0.549	12.56	23.98	MCS0
5590	118	12.49	0.549	13.04	23.98	MCS0
5710	142	12.94	0.549	13.49	23.98	MCS0
5755	151	12.81	0.549	13.36	30.00	MCS0
5795	159	12.75	0.549	13.30	30.00	MCS0

802.11ac(80 MHz) Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase MCS Index
Frequency [MHz]	Channel No.					
5210	42	7.55	1.031	8.58	23.98	MCS0
5290	58	7.03	1.031	8.06	23.98	MCS0
5530	106	7.76	1.031	8.79	23.98	MCS0
5610	122	11.19	1.031	12.22	23.98	MCS0
5690	138	11.15	1.031	12.18	23.98	MCS0
5775	155	11.38	1.031	12.41	30.00	MCS0

10.5 POWER SPECTRAL DENSITY

802.11a Mode		Measured PSD [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm/MHz]	Worstcase Datarate [Mbps]	Limit
Frequency [MHz]	Channel No.					
5180	36	4.714	0.236	4.950	6M	11 dBm/MHz
5200	40	4.887	0.236	5.123	6M	
5240	48	4.485	0.236	4.721	6M	
5260	52	5.045	0.236	5.281	6M	
5300	60	5.093	0.236	5.329	6M	
5320	64	4.754	0.236	4.990	6M	
5500	100	4.330	0.236	4.566	6M	
5600	120	4.379	0.236	4.615	6M	
5720	144	5.679	0.236	5.915	6M	
5745	149	1.920	0.236	2.156	6M	
5785	157	1.702	0.236	1.938	6M	30 dBm/500 kHz
5825	165	2.624	0.236	2.860	6M	

802.11n(20 MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm/MHz]	Worstcase MCS Index	Limit
Frequency [MHz]	Channel No.					
5180	36	4.250	0.308	4.558	MCS0	11 dBm/MHz
5200	40	4.564	0.308	4.872	MCS0	
5240	48	4.059	0.308	4.367	MCS0	
5260	52	4.704	0.308	5.012	MCS0	
5300	60	4.601	0.308	4.909	MCS0	
5320	64	4.330	0.308	4.638	MCS0	
5500	100	3.845	0.308	4.153	MCS0	
5600	120	3.143	0.308	3.451	MCS0	
5720	144	4.461	0.308	4.769	MCS0	
5745	149	1.565	0.308	1.873	MCS0	
5785	157	2.252	0.308	2.560	MCS0	30 dBm/500 kHz
5825	165	2.999	0.308	3.307	MCS0	

802.11n(40 MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm/MHz]	Worstcase MCS Index	Limit
Frequency [MHz]	Channel No.					
5190	38	-2.095	0.553	-1.542	MCS0	11 dBm/MHz
5230	46	-1.304	0.553	-0.751	MCS0	
5270	54	-1.092	0.553	-0.539	MCS0	
5310	62	-2.319	0.553	-1.766	MCS0	
5510	102	-1.871	0.553	-1.318	MCS0	
5590	118	-1.653	0.553	-1.100	MCS0	
5710	142	-0.670	0.553	-0.117	MCS0	
5755	151	-3.297	0.553	-2.744	MCS0	30 dBm /500 kHz
5795	159	-3.537	0.553	-2.984	MCS0	

802.11ac(20 MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm/MHz]	Worstcase MCS Index	Limit
Frequency [MHz]	Channel No.					
5180	36	4.497	0.300	4.797	MCS0	11 dBm/MHz
5200	40	4.378	0.300	4.678	MCS0	
5240	48	4.225	0.300	4.525	MCS0	
5260	52	4.553	0.300	4.853	MCS0	
5300	60	4.616	0.300	4.916	MCS0	
5320	64	4.359	0.300	4.659	MCS0	
5500	100	3.988	0.300	4.288	MCS0	
5600	120	4.181	0.300	4.481	MCS0	
5720	144	5.305	0.300	5.605	MCS0	
5745	149	2.210	0.300	2.510	MCS0	
5785	157	1.380	0.300	1.680	MCS0	30 dBm/500 kHz
5825	165	1.991	0.300	2.291	MCS0	


802.11ac(40 MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm/MHz]	Worstcase MCS Index	Limit
Frequency [MHz]	Channel No.					
5190	38	-2.390	0.549	-1.841	MCS0	11 dBm/MHz
5230	46	-1.585	0.549	-1.036	MCS0	
5270	54	-1.116	0.549	-0.567	MCS0	
5310	62	-2.214	0.549	-1.665	MCS0	
5510	102	-2.717	0.549	-2.168	MCS0	
5590	118	-1.846	0.549	-1.297	MCS0	
5710	142	-0.701	0.549	-0.152	MCS0	
5755	151	-3.470	0.549	-2.921	MCS0	30 dBm/500 kHz
5795	159	-3.368	0.549	-2.819	MCS0	

802.11ac(80 MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm/MHz]	Worstcase MCS Index	Limit
Frequency [MHz]	Channel No.					
5210	42	-9.318	1.031	-8.287	MCS0	11 dBm/MHz
5290	58	-9.579	1.031	-8.548	MCS0	
5530	106	-8.664	1.031	-7.633	MCS0	
5610	122	-5.425	1.031	-4.394	MCS0	
5690	138	-5.397	1.031	-4.366	MCS0	
5775	155	-8.013	1.031	-6.982	MCS0	30 dBm/500 kHz

☐ Test Plots(802.11a)

Note:


In order to simplify the report, attached plots were only channel of the highest power.

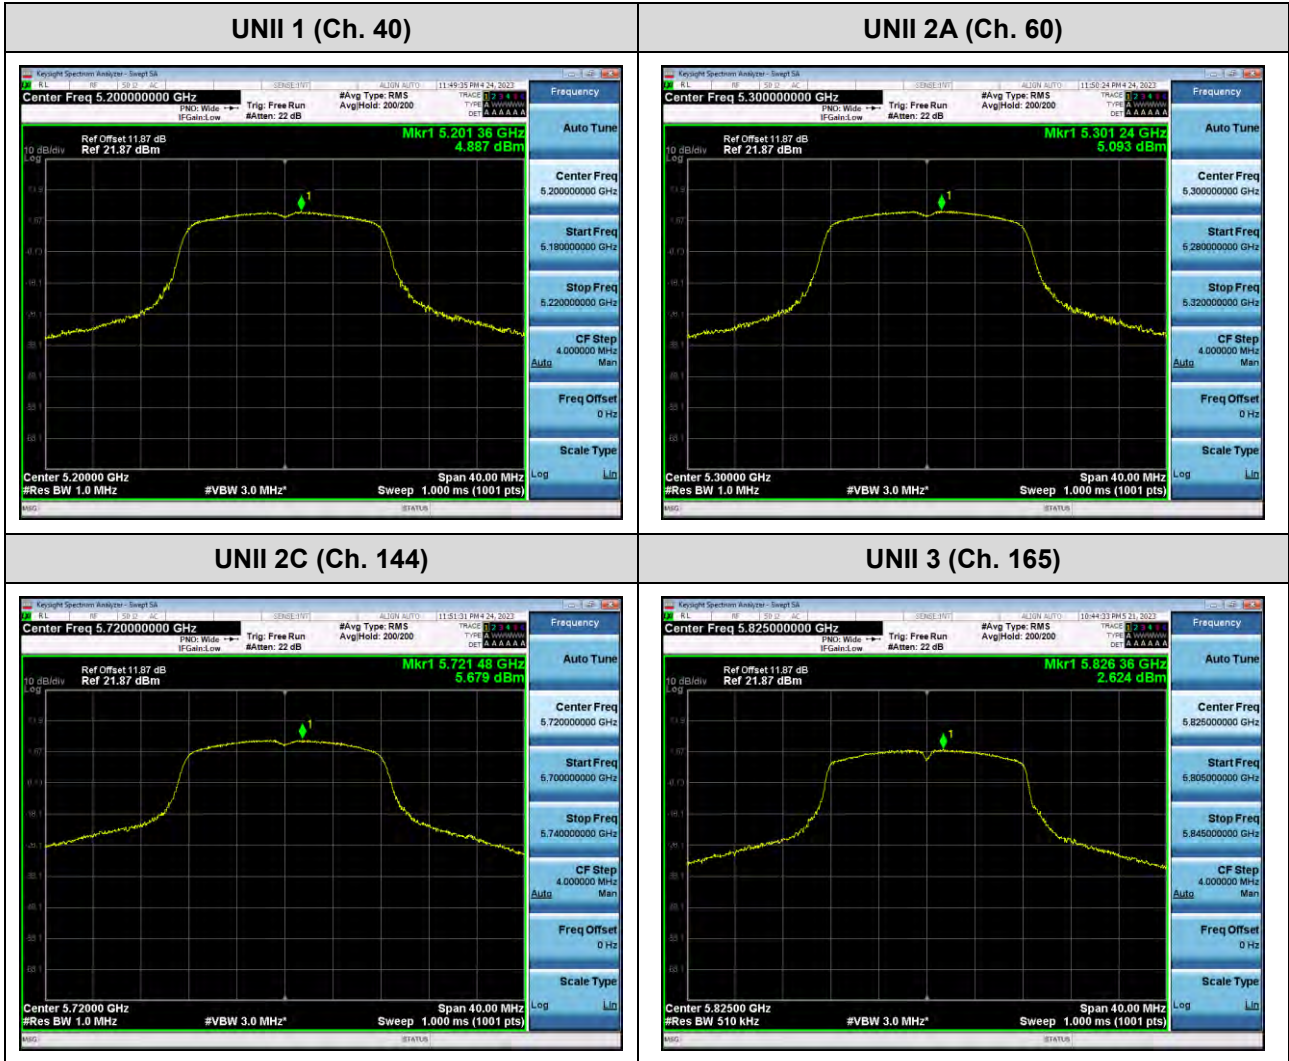

☐ Test Plots(802.11n(HT20))

Note:


In order to simplify the report, attached plots were only channel of the highest power.

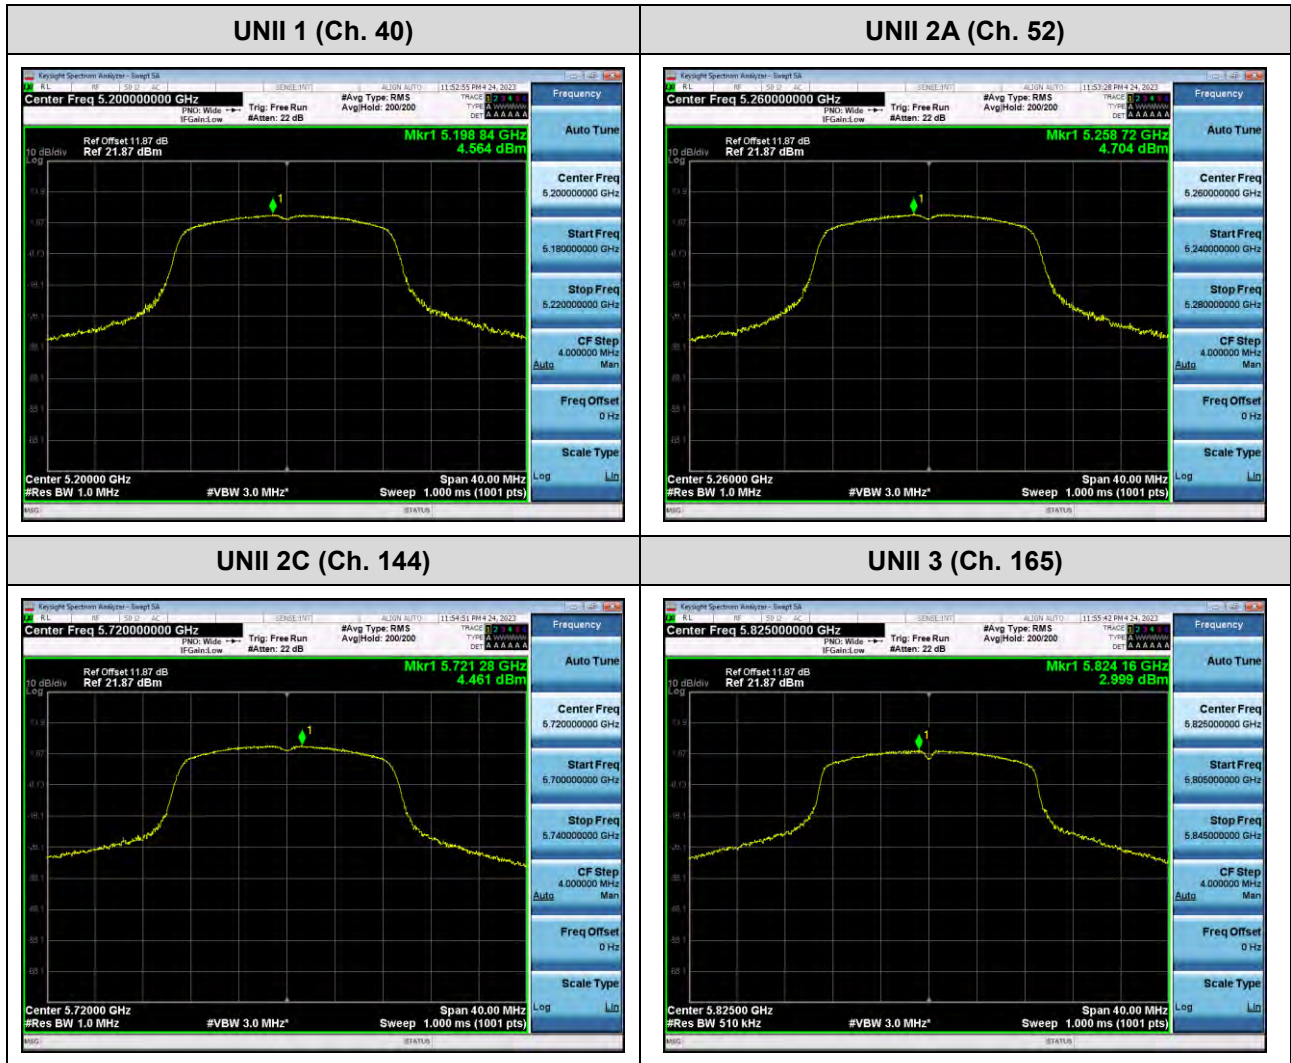

☐ Test Plots(802.11n(HT40))

Note:


In order to simplify the report, attached plots were only channel of the highest power.

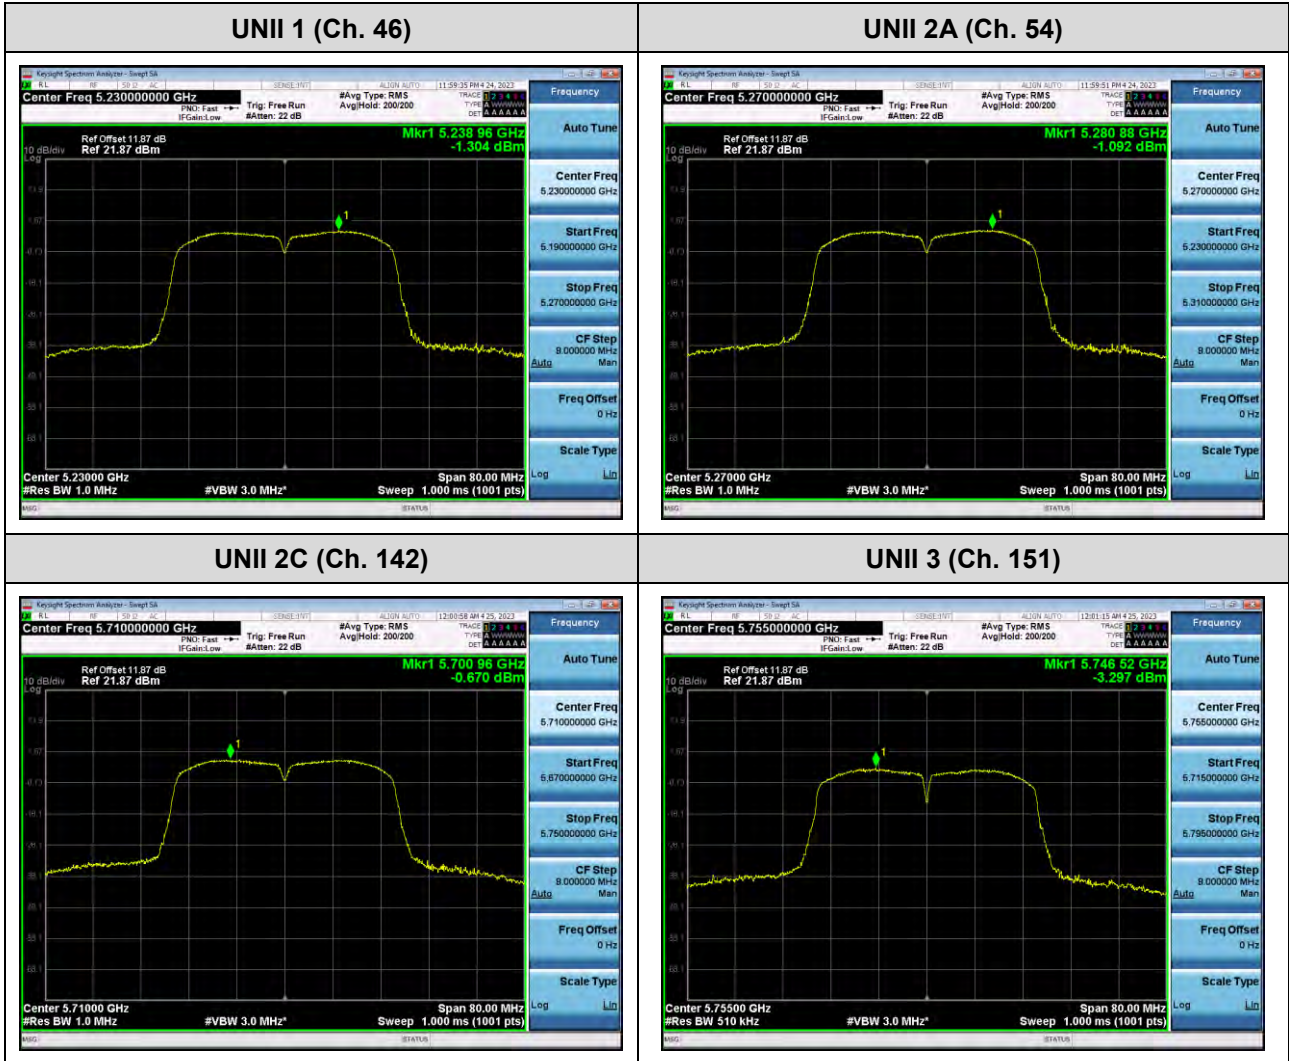

☐ Test Plots(802.11ac(VHT20))

Note:


In order to simplify the report, attached plots were only channel of the highest power.

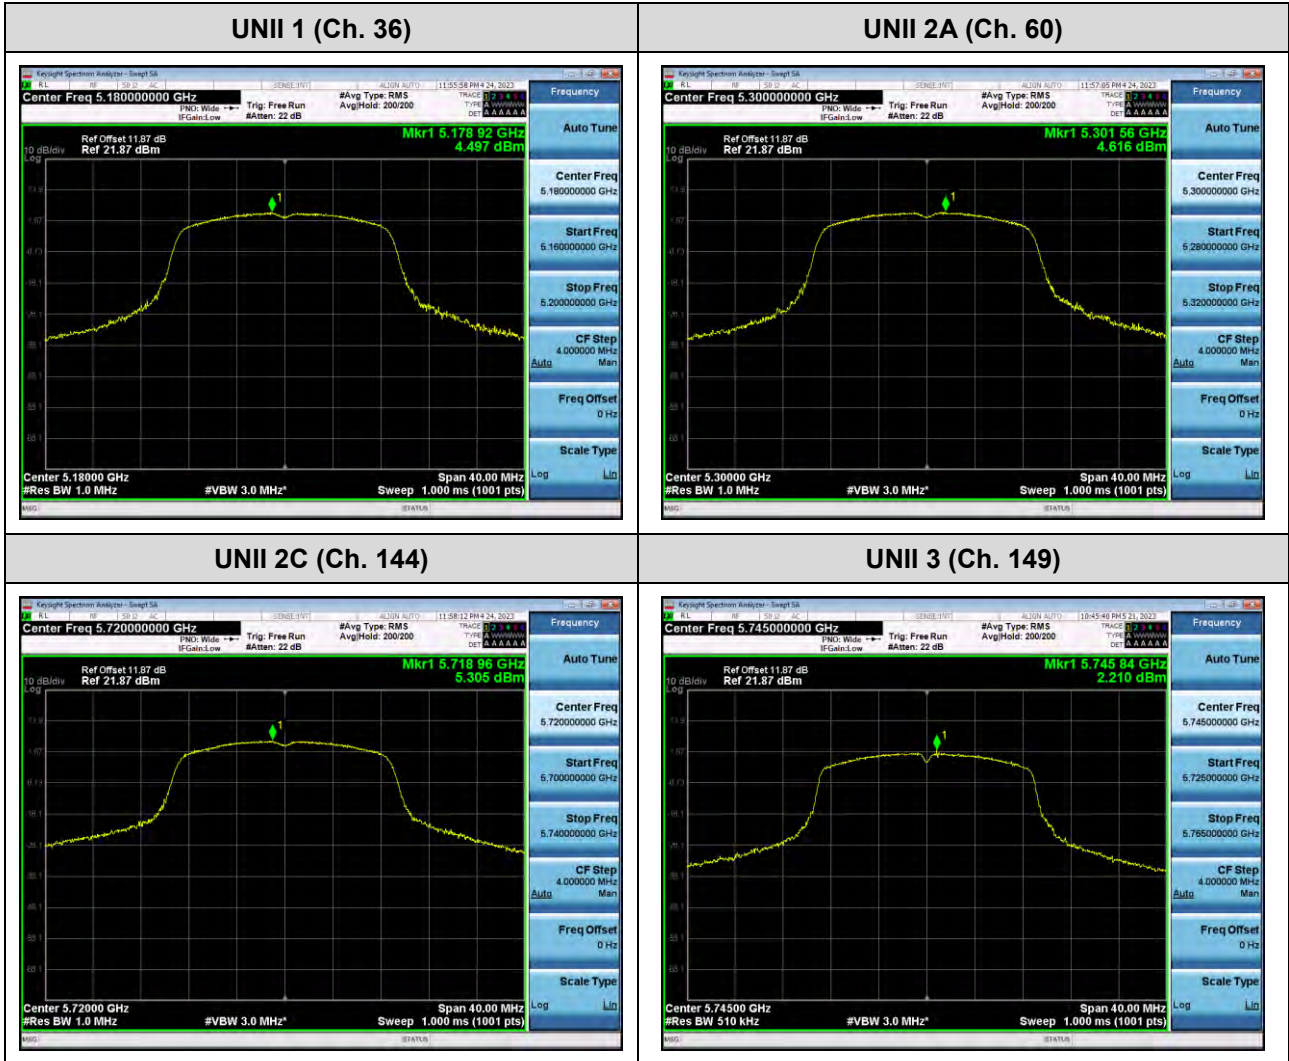

☐ Test Plots(802.11ac(VHT40))

Note:


In order to simplify the report, attached plots were only channel of the highest power.

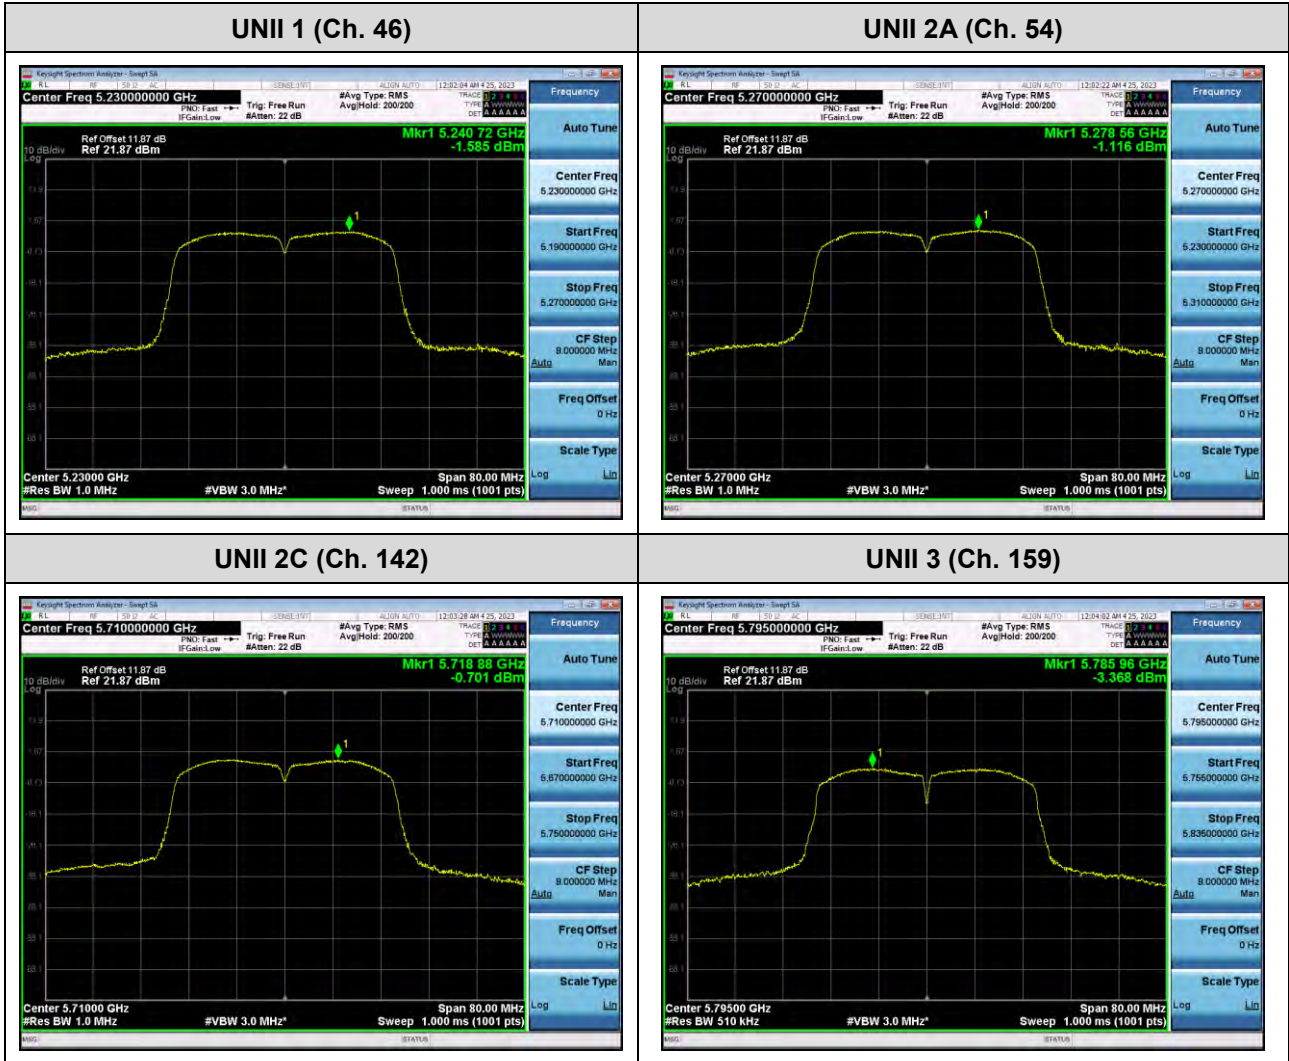

☐ Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only channel of the highest power.

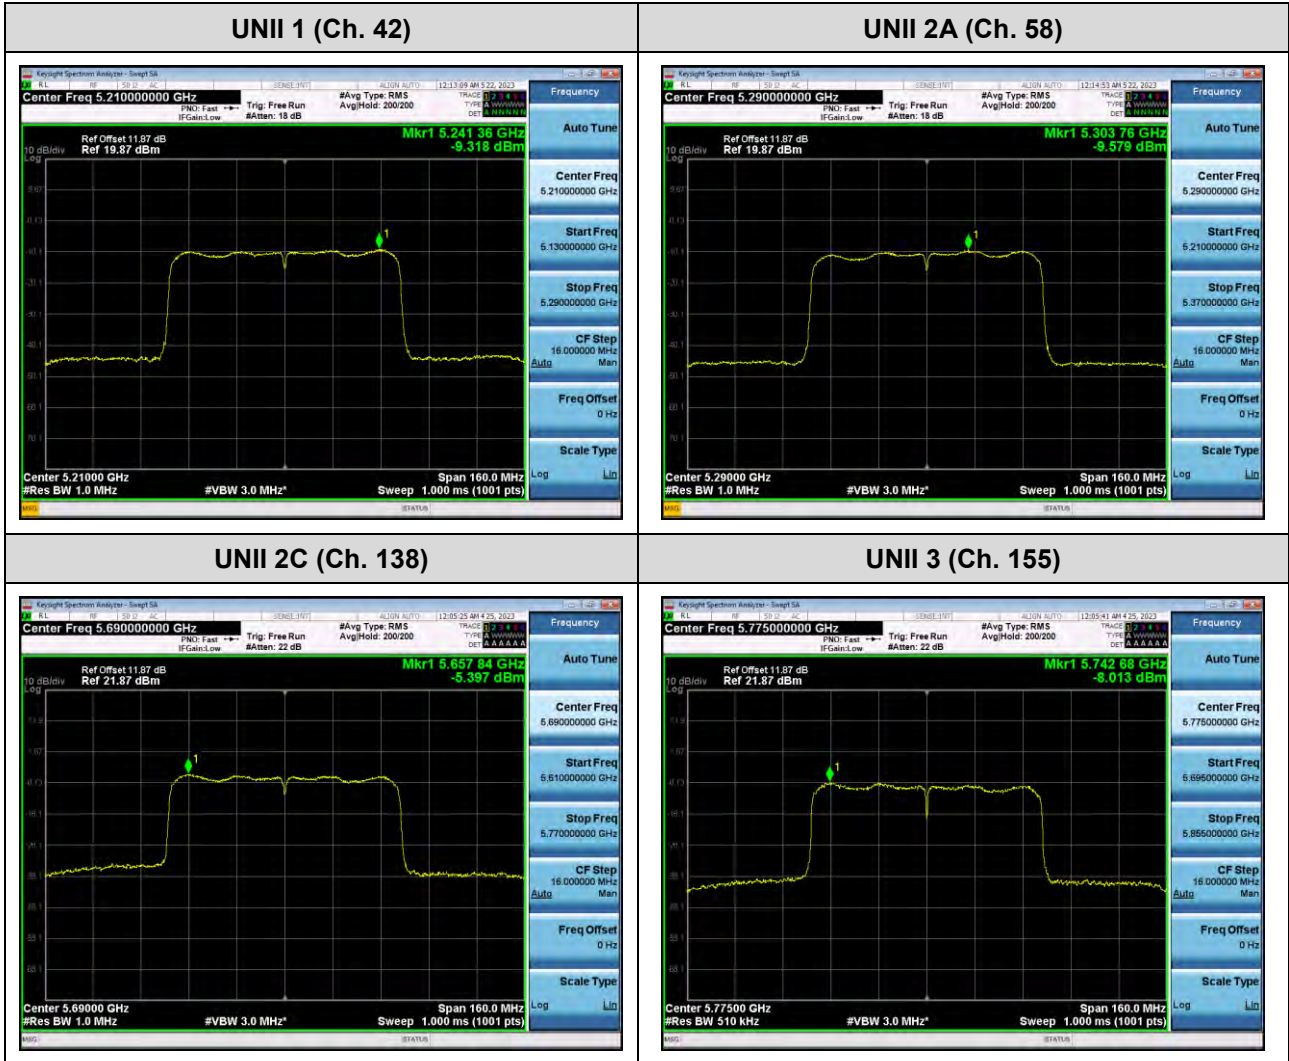

10.6 FREQUENCY STABILITY.

10.6.1 80 MHz BW

Startup after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,210,000,000 Hz
CHANNEL:	42
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5210062.55	62.55
100%		-30	5210059.46	59.46
100%		-20	5210051.69	51.69
100%		-10	5210064.03	64.03
100%		0	5210033.71	33.71
100%		+10	5210017.70	17.70
100%		+30	5210013.21	13.21
100%		+40	5210046.31	46.31
100%		+50	5210064.76	64.76
High		4.4	+20	5210085.76
Low	3.8	+20	5210017.21	17.21

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,290,000,000 Hz
CHANNEL:	58
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5290095.17	95.17
100%		-30	5290030.95	30.95
100%		-20	5290042.46	42.46
100%		-10	5290095.12	95.12
100%		0	5290096.05	96.05
100%		+10	5290016.07	16.07
100%		+30	5290025.93	25.93
100%		+40	5290070.48	70.48
100%		+50	5290082.76	82.76
High		4.4	+20	5210066.94
Low	3.8	+20	5210074.32	74.32

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5530013.88	13.88
100%		-30	5530074.62	74.62
100%		-20	5530028.49	28.49
100%		-10	5530066.13	66.13
100%		0	5530033.55	33.55
100%		+10	5530031.52	31.52
100%		+30	5530070.57	70.57
100%		+40	5530021.90	21.9
100%		+50	5530005.10	5.10
High		4.4	+20	5210076.11
Low	3.8	+20	5210090.50	90.50

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5775054.58	54.58
100%		-30	5775087.47	87.47
100%		-20	5775082.58	82.58
100%		-10	5775002.40	2.4
100%		0	5775029.22	29.22
100%		+10	5775046.12	46.12
100%		+30	5775024.21	24.21
100%		+40	5775088.55	88.55
100%		+50	5775078.45	78.45
High		4.4	+20	5210088.99
Low	3.8	+20	5210093.42	93.42

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,210,000,000 Hz
CHANNEL:	42
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5210050.78	50.78
100%		-30	5210029.84	29.84
100%		-20	5210044.22	44.22
100%		-10	5210055.34	55.34
100%		0	5210092.45	92.45
100%		+10	5210030.13	30.13
100%		+30	5210057.33	57.33
100%		+40	5210079.91	79.91
100%		+50	5210064.08	64.08
High		4.4	+20	5210034.02
Low	3.8	+20	5210091.71	91.71

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,290,000,000 Hz
CHANNEL:	58
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5290049.12	49.12
100%		-30	5290066.41	66.41
100%		-20	5290079.49	79.49
100%		-10	5290069.61	69.61
100%		0	5290040.95	40.95
100%		+10	5290029.79	29.79
100%		+30	5290054.93	54.93
100%		+40	5290086.37	86.37
100%		+50	5290015.94	15.94
High		4.4	+20	5210007.20
Low	3.8	+20	5210081.70	81.70

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5530048.95	48.95
100%		-30	5530065.43	65.43
100%		-20	5530062.95	62.95
100%		-10	5530021.09	21.09
100%		0	5530008.56	8.56
100%		+10	5530070.55	70.55
100%		+30	5530031.94	31.94
100%		+40	5530059.18	59.18
100%		+50	5530014.80	14.80
High		4.4	+20	5210070.71
Low	3.8	+20	5210069.44	69.44

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5775024.54	24.54
100%		-30	5775018.20	18.20
100%		-20	5775096.74	96.74
100%		-10	5775035.13	35.13
100%		0	5775046.35	46.35
100%		+10	5775030.67	30.67
100%		+30	5775066.21	66.21
100%		+40	5775053.06	53.06
100%		+50	5775060.51	60.51
High		4.4	+20	5210013.08
Low	3.8	+20	5210027.58	27.58

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

5 minutes after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,210,000,000 Hz
CHANNEL:	42
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5210049.26	49.26
100%		-30	5210061.53	61.53
100%		-20	5210095.48	95.48
100%		-10	5210047.09	47.09
100%		0	5210059.54	59.54
100%		+10	5210008.70	8.70
100%		+30	5210048.04	48.04
100%		+40	5210046.15	46.15
100%		+50	5210060.32	60.32
High		4.4	+20	5210042.49
Low	3.8	+20	5210014.12	14.12

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,290,000,000 Hz
CHANNEL:	58
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5290003.91	3.91
100%		-30	5290062.44	62.44
100%		-20	5290065.48	65.48
100%		-10	5290047.56	47.56
100%		0	5290023.75	23.75
100%		+10	5290036.97	36.97
100%		+30	5290070.68	70.68
100%		+40	5290048.08	48.08
100%		+50	5290072.03	72.03
High		4.4	+20	5210054.92
Low	3.8	+20	5210093.90	93.90

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5530056.58	56.58
100%		-30	5530095.22	95.22
100%		-20	5530002.16	2.16
100%		-10	5530032.21	32.21
100%		0	5530084.86	84.86
100%		+10	5530073.23	73.23
100%		+30	5530074.37	74.37
100%		+40	5530022.21	22.21
100%		+50	5530059.86	59.86
High		4.4	+20	5210084.54
Low	3.8	+20	5210077.30	77.30

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5775066.89	66.89
100%		-30	5775057.92	57.92
100%		-20	5775094.74	94.74
100%		-10	5775095.20	95.2
100%		0	5775073.66	73.66
100%		+10	5775051.45	51.45
100%		+30	5775054.75	54.75
100%		+40	5775039.45	39.45
100%		+50	5775017.77	17.77
High		4.4	+20	5210058.72
Low	3.8	+20	5210003.57	3.57

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10 minutes after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,210,000,000 Hz
CHANNEL:	42
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5210078.15	78.15
100%		-30	5210039.21	39.21
100%		-20	5210036.81	36.81
100%		-10	5210071.33	71.33
100%		0	5210059.52	59.52
100%		+10	5210074.95	74.95
100%		+30	5210035.06	35.06
100%		+40	5210036.39	36.39
100%		+50	5210022.53	22.53
High		4.4	+20	5210076.38
Low	3.8	+20	5210044.84	44.84

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,290,000,000 Hz
CHANNEL:	58
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5290073.17	73.17
100%		-30	5290081.30	81.30
100%		-20	5290053.15	53.15
100%		-10	5290034.54	34.54
100%		0	5290041.77	41.77
100%		+10	5290021.36	21.36
100%		+30	5290096.76	96.76
100%		+40	5290082.87	82.87
100%		+50	5290073.02	73.02
High		4.4	+20	5210059.19
Low	3.8	+20	5210034.49	34.49

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
 OPERATING FREQUENCY: 5,530,000,000 Hz
 CHANNEL: 106
 REFERENCE VOLTAGE: 4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5530082.50	82.50
100%		-30	5530091.96	91.96
100%		-20	5530097.68	97.68
100%		-10	5530040.81	40.81
100%		0	5530098.18	98.18
100%		+10	5530054.24	54.24
100%		+30	5530004.15	4.15
100%		+40	5530087.99	87.99
100%		+50	5530055.70	55.70
High	4.4	+20	5210055.05	55.05
Low	3.8	+20	5210042.52	42.52

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	4.20 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	4.2	+20(Ref)	5775091.58	91.58
100%		-30	5775024.47	24.47
100%		-20	5775058.12	58.12
100%		-10	5775017.67	17.67
100%		0	5775069.53	69.53
100%		+10	5775039.85	39.85
100%		+30	5775079.27	79.27
100%		+40	5775042.23	42.23
100%		+50	5775071.90	71.90
High		4.4	+20	5210058.05
Low	3.8	+20	5210049.53	49.53

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10.7 STRADDLE CHANNEL

10.7.1 26 dB Bandwidth

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11a	UNII 2C	5720	144	5704.28	20.72
802.11n(HT20)				5705.48	19.52
802.11ac(VHT20)				5705.36	19.64
802.11a	UNII 3	5720	144	5734.16	9.16
802.11n(HT20)				5733.40	8.40
802.11ac(VHT20)				5733.48	8.48

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11n(HT40)	UNII 2C	5710	142	5685.92	39.08
802.11ac(VHT40)				5689.20	35.80
802.11n(HT40)	UNII 3	5710	142	5733.84	8.84
802.11ac(VHT40)				5731.20	6.20

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11ac(VHT80)	UNII 2C	5690	138	5649.36	75.64
	UNII 3	5690	138	5730.80	5.80


Note:

[UNII 2C] 26 dB Bandwidth = 5 725 MHz - Measured Frequency[MHz]

[UNII 3C] 26 dB Bandwidth = Measured Frequency[MHz] – 5 725 MHz

Test Plots (26 dB Bandwidth)

802.11a UNII Band

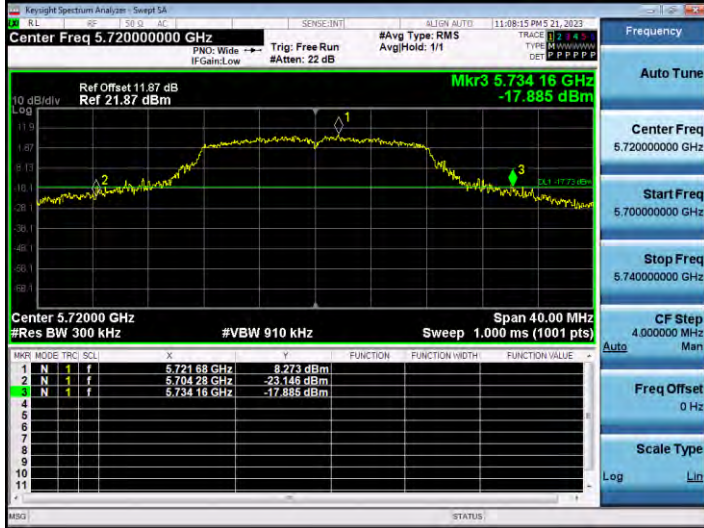

802.11n(HT20) UNII Band




802.11ac(VHT20) UNII Band



☐ Test Plots (26 dB Bandwidth)


802.11n(HT40) UNII Band

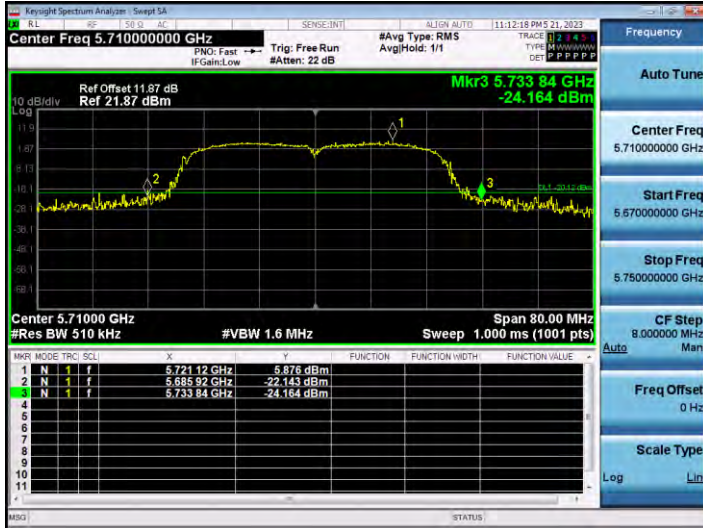

802.11ac(VHT40) UNII Band



802.11ac(VHT80) UNII Band

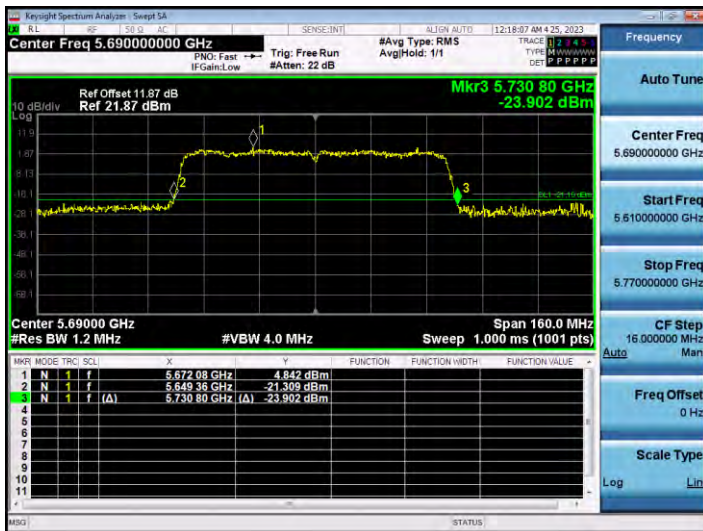

10.7.2 6 dB Bandwidth

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
802.11a	UNII 3	5720	144	5727.56	2.56	> 0.5
802.11n(HT20)				5727.60	2.60	> 0.5
802.11ac(VHT20)				5727.92	2.92	> 0.5

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
802.11n(HT40)	UNII 3	5710	142	5727.60	2.60	> 0.5
802.11ac(VHT40)				5727.60	2.60	> 0.5


Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT80)	UNII 3	5690	138	5727.76	2.76	> 0.5

Note:

6 dB Bandwidth = Measured Frequency[MHz] – 5725MHz

☐ Test Plots(UNII 3 Band 6 dB Bandwidth)

802.11a CH.144

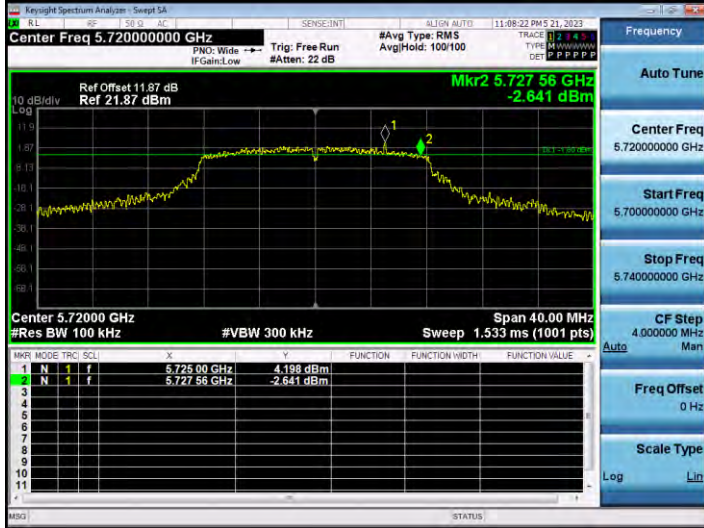

802.11n_HT20 CH.144




802.11ac_VHT20 CH.144




802.11n_HT40 CH.142



802.11ac_VHT40 CH.142

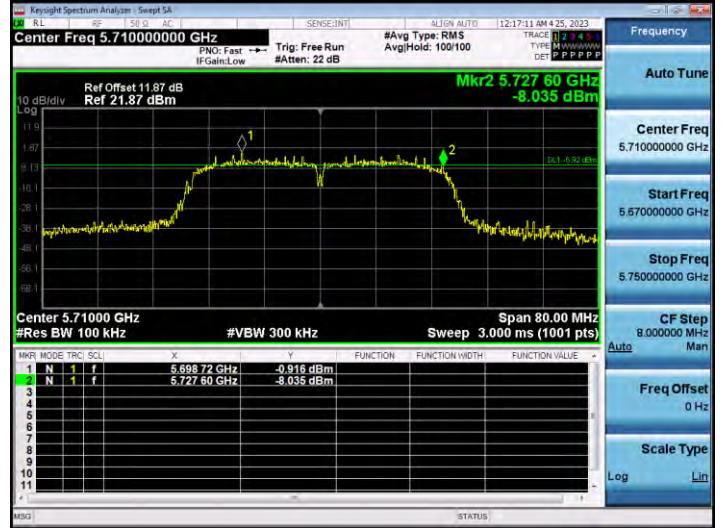

802.11ac_VHT80 CH.138

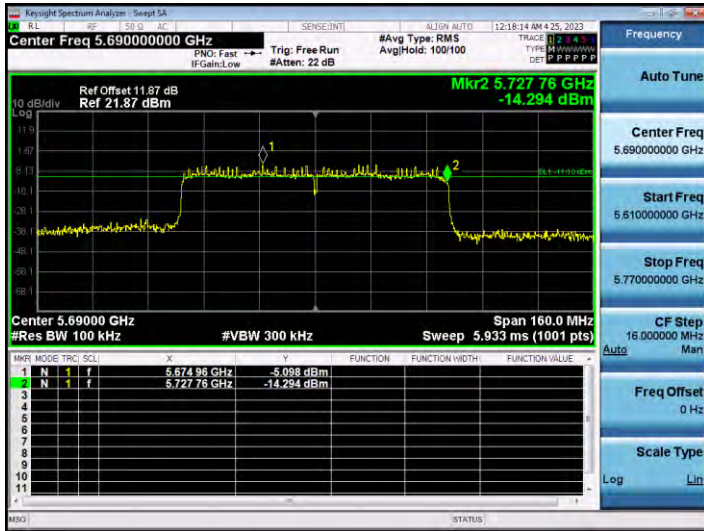

10.7.3 Output Power


Mode	Frequency [MHz]	Channel	Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate
802.11a	5720	144	15.17	0.236	15.41	23.98	6 Mbps
802.11n(HT20)	(UNII 2C		14.27	0.308	14.58	23.90	MCS0
802.11ac(VHT20)	Band)		14.22	0.300	14.52	23.93	MCS0
802.11a	5720	144	7.47	0.236	7.70	30.00	6 Mbps
802.11n(HT20)	(UNII 3		6.89	0.308	7.20	30.00	MCS0
802.11ac(VHT20)	Band)		6.80	0.300	7.10	30.00	MCS0

Mode	Frequency [MHz]	Channel	Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate
802.11n(HT40)	5710	142	12.80	0.553	13.35	23.98	MCS0
802.11ac(VHT40)	(UNII 2C Band)		12.08	0.549	12.63	23.98	MCS0
802.11n(HT40)	5710	142	0.00	0.553	0.55	30.00	MCS0
802.11ac(VHT40)	(UNII 3 Band)		-0.72	0.549	-0.17	30.00	MCS0


Mode	Frequency [MHz]	Channel	Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate
802.11ac(VHT80)	5690 (UNII 2C Band)	138	10.68	1.031	11.71	23.98	MCS0
	5690 (UNII 3 Band)	138	-4.60	1.031	-3.57	30.00	MCS0

Test Plots

802.11a UNII 2C Band

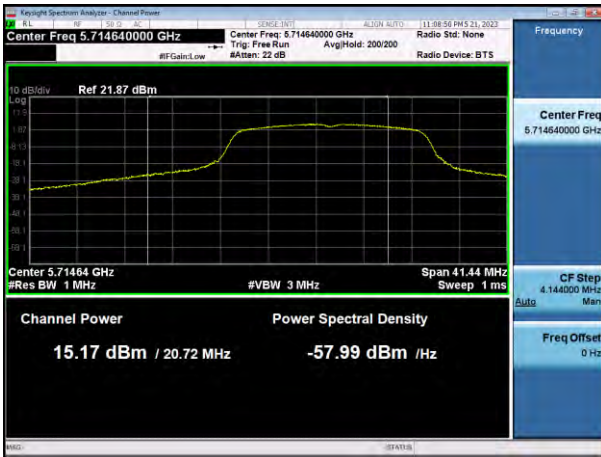

802.11a UNII 3 Band

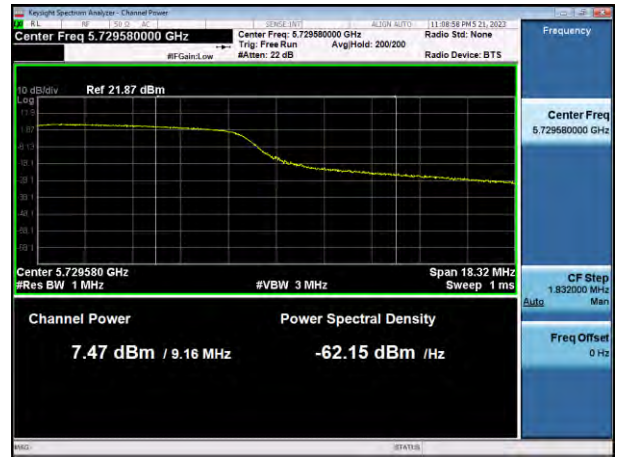

802.11n(HT20) UNII 2C Band



802.11n(HT20) UNII 3 Band



802.11ac(VHT20) UNII 2C Band




802.11ac(VHT20) UNII 3 Band



802.11n(HT40) UNII 2C Band




802.11n(HT40) UNII 3 Band

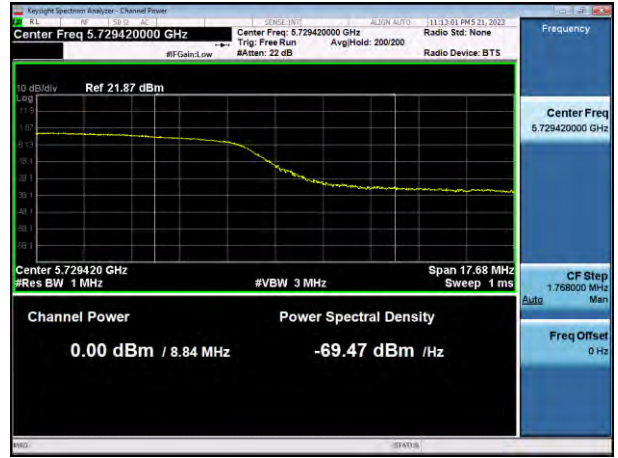


802.11ac(VHT40) UNII 2C Band



802.11ac(VHT40) UNII 3 Band

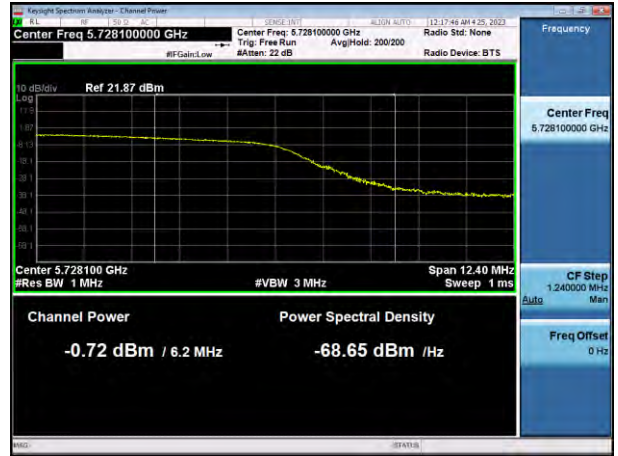

802.11ac(VHT80) UNII 2C Band

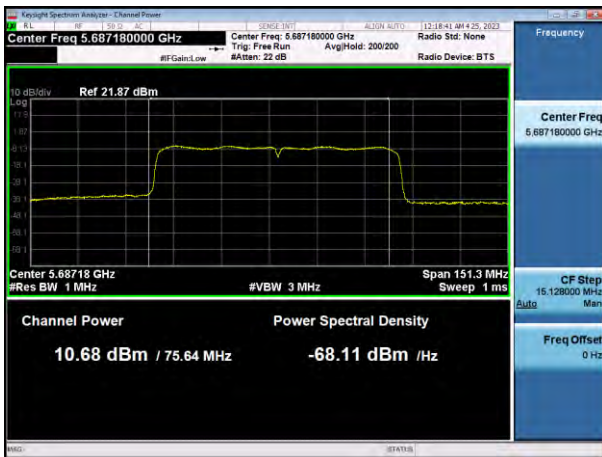

802.11ac(VHT80) UNII 3 Band



10.7.4 Power Spectral Density

Mode	Frequency [MHz]	Channel	Measured Density [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm]	Limit [dBm]	Worstcase Datarate
802.11a	5720 (UNII 2C)	144	5.479	0.236	5.716	11 dBm/ MHz	6 Mbps
802.11n(HT20)			4.466	0.308	4.774		MCS0
802.11ac(VHT20)			4.351	0.300	4.650		MCS0
802.11a	5720 (UNII 3)	144	0.908	0.236	1.144	30 dBm /500 kHz	6 Mbps
802.11n(HT20)			0.037	0.308	0.345		MCS0
802.11ac(VHT20)			-0.074	0.300	0.225		MCS0

Mode	Frequency [MHz]	Channel	Measured Density [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm]	Limit [dBm]	Worstcase Datarate
802.11n(HT40)	5710 (UNII 2C)	142	-0.962	0.553	-0.409	11 dBm/ MHz	MCS0
802.11ac(VHT40)			-1.602	0.549	-1.053		MCS0
802.11n(HT40)	5710 (UNII 3)	142	-6.179	0.553	-5.626	30 dBm/ 500 kHz	MCS0
802.11ac(VHT40)			-6.788	0.549	-6.239		MCS0

Mode	Frequency [MHz]	Channel	Measured Density [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm]	Limit [dBm]	Worstcase Datarate
802.11ac(VHT80)	5690 (UNII 2C)	138	-6.164	1.031	-5.133	11 dBm/ MHz	MCS0
	5690 (UNII 3)	138	-11.039	1.031	-10.008	30 dBm/ 500 kHz	MCS0

Test Plots

802.11a UNII 2C Band



802.11a UNII 3 Band



802.11n(HT20) UNII 2C Band



802.11n(HT20) UNII 3 Band



802.11ac(VHT20) UNII 2C Band



802.11ac(VHT20) UNII 3 Band



802.11n(HT40) UNII 2C Band



802.11n(HT40) UNII 3 Band



802.11ac(VHT40) UNII 2C Band



802.11ac(VHT40) UNII 3 Band



802.11ac(VHT80) UNII 2C Band



802.11ac(VHT80) UNII 3 Band



10.8 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+D.F+C.L	POL	Total	Limit	Margin
[MHz]	[dBµV]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]
No Critical peaks found						

Note:

1. The Measured Value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBµV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dBµV]	[dB/m]	[H/V]	[dBµV/m]	[dBµV/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode

Frequency Range : Above 1 GHz

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Measured Value [dB μ V]	CL+AF+DF-AG [dB/m]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10360	43.94	8.52	V	52.46	68.20	15.74	PK
15540	42.39	13.29	V	55.68	73.98	18.30	PK
15540	28.79	13.29	V	42.08	53.98	11.90	AV
10360	44.14	8.52	H	52.66	68.20	15.54	PK
15540	40.98	13.29	H	54.27	73.98	19.71	PK
15540	28.46	13.29	H	41.75	53.98	12.23	AV

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Measured Value [dB μ V]	CL+AF+DF-AG [dB/m]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10400	43.82	8.86	V	52.68	68.20	15.52	PK
15600	40.87	13.36	V	54.23	73.98	19.75	PK
15600	28.55	13.36	V	41.91	53.98	12.07	AV
10400	44.22	8.86	H	53.08	68.20	15.12	PK
15600	40.79	13.36	H	54.15	73.98	19.83	PK
15600	28.31	13.36	H	41.67	53.98	12.31	AV

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Measured Value [dBμV]	CL+AF+DF-AG [dB/m]	POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
10480	43.54	9.22	V	52.76	68.20	15.44	PK
15720	40.87	13.27	V	54.14	73.98	19.84	PK
15720	27.76	13.27	V	41.03	53.98	12.95	AV
10480	43.62	9.22	H	52.84	68.20	15.36	PK
15720	40.63	13.27	H	53.90	73.98	20.08	PK
15720	27.75	13.27	H	41.02	53.98	12.96	AV

Band : UNII 2A
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5260 MHz
 Channel No. 52 Ch

Frequency [MHz]	Measured Value [dBμV]	CL+AF+DF-AG [dB/m]	POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
10520	43.68	9.29	V	52.97	68.20	15.23	PK
15780	41.04	13.27	V	54.31	73.98	19.67	PK
15780	27.96	13.27	V	41.23	53.98	12.75	AV
10520	43.84	9.29	H	53.13	68.20	15.07	PK
15780	41.41	13.27	H	54.68	73.98	19.30	PK
15780	28.10	13.27	H	41.37	53.98	12.61	AV

Band : UNII 2A
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5300 MHz
 Channel No. 60 Ch

Frequency [MHz]	Measured Value [dBμV]	CL+AF+DF-AG [dB/m]	POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
10600	42.62	10.19	V	52.81	73.98	21.17	PK
10600	29.65	10.19	V	39.84	53.98	14.14	AV
15900	41.52	12.93	V	54.45	73.98	19.53	PK
15900	28.21	12.93	V	41.14	53.98	12.84	AV
10600	43.05	10.19	H	53.24	73.98	20.74	PK
10600	30.46	10.19	H	40.65	53.98	13.33	AV
15900	41.50	12.93	H	54.43	73.98	19.55	PK
15900	28.85	12.93	H	41.78	53.98	12.20	AV

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Measured Value [dBμV]	CL+AF+DF-AG [dB/m]	POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
10640	42.94	9.80	V	52.74	73.98	21.24	PK
10640	29.62	9.80	V	39.42	53.98	14.56	AV
15960	41.22	12.63	V	53.85	73.98	20.13	PK
15960	28.21	12.63	V	40.84	53.98	13.14	AV
10640	43.60	9.80	H	53.40	73.98	20.58	PK
10640	30.47	9.80	H	40.27	53.98	13.71	AV
15960	41.13	12.63	H	53.76	73.98	20.22	PK
15960	28.66	12.63	H	41.29	53.98	12.69	AV

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Measured Value [dBμV]	CL+AF+DF-AG [dB/m]	POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11000	42.56	10.95	V	53.51	73.98	20.47	PK
11000	29.61	10.95	V	40.56	53.98	13.42	AV
16500	41.79	12.45	V	54.24	68.20	13.96	PK
11000	43.15	10.95	H	54.10	73.98	19.88	PK
11000	30.09	10.95	H	41.04	53.98	12.94	AV
16500	41.44	12.45	H	53.89	68.20	14.31	PK

Band : UNII 2C
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5600 MHz
 Channel No. 120 Ch

Frequency [MHz]	Measured Value [dBμV]	CL+AF+DF-AG [dB/m]	POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11200	42.29	10.83	V	53.12	73.98	20.86	PK
11200	28.78	10.83	V	39.61	53.98	14.37	AV
16800	41.54	13.07	V	54.61	68.20	13.59	PK
11200	42.38	10.83	H	53.21	73.98	20.77	PK
11200	29.09	10.83	H	39.92	53.98	14.06	AV
16800	40.99	13.07	H	54.06	68.20	14.14	PK

Band : UNII 2C
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5720 MHz
 Channel No. 144 Ch

Frequency [MHz]	Measured Value [dBμV]	CL+AF+DF-AG [dB/m]	POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11440	41.48	11.07	V	52.55	73.98	21.43	PK
11440	28.35	11.07	V	39.42	53.98	14.56	AV
17160	40.79	13.93	V	54.72	68.20	13.48	PK
11440	41.15	11.07	H	52.22	73.98	21.76	PK
11440	28.38	11.07	H	39.45	53.98	14.53	AV
17160	41.02	13.93	H	54.95	68.20	13.25	PK

Band : UNII 3
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5745MHz
 Channel No. 149 Ch

Frequency [MHz]	Measured Value [dBμV]	CL+AF+DF-AG [dB/m]	POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11490	41.89	11.30	V	53.19	73.98	20.79	PK
11490	28.55	11.30	V	39.85	53.98	14.13	AV
17235	40.55	14.50	V	55.05	68.20	13.15	PK
11490	42.37	11.30	H	53.67	73.98	20.31	PK
11490	28.76	11.30	H	40.06	53.98	13.92	AV
17235	41.70	14.50	H	56.20	68.20	12.00	PK

Band : UNII 3
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5785 MHz
 Channel No. 157 Ch

Frequency [MHz]	Measured Value [dBμV]	CL+AF+DF-AG [dB/m]	POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11570	42.32	10.55	V	52.87	73.98	21.11	PK
11570	28.68	10.55	V	39.23	53.98	14.75	AV
17355	40.41	15.81	V	56.22	68.20	11.98	PK
11570	42.03	10.55	H	52.58	73.98	21.40	PK
11570	28.55	10.55	H	39.10	53.98	14.88	AV
17355	40.95	15.81	H	56.76	68.20	11.44	PK

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Measured Value [dBμV]	CL+AF+DF-AG [dB/m]	POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11650	42.13	10.07	V	52.20	73.98	21.78	PK
11650	28.79	10.07	V	38.86	53.98	15.12	AV
17475	40.21	17.40	V	57.61	68.20	10.59	PK
11650	41.77	10.07	H	51.84	73.98	22.14	PK
11650	28.78	10.07	H	38.85	53.98	15.13	AV
17475	40.47	17.40	H	57.87	68.20	10.33	PK

[RSDB Mode]
Bluetooth_Ch. 0_DH5_GFSK + WLAN_5 GHz_802.11a_6 Mbps_Ch.165


Frequency [MHz]	Measured Value [dBμV]	CL+AF+DF-AG [dB/m]	POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
11650	41.99	10.07	V	52.06	73.98	21.92	PK
11650	28.77	10.07	V	38.84	53.98	15.14	AV
17475	40.22	17.40	V	57.62	68.20	10.58	PK
11650	42.10	10.07	H	52.17	73.98	21.81	PK
11650	28.93	10.07	H	39.00	53.98	14.98	AV
17475	40.48	17.40	H	57.88	68.20	10.32	PK
8226	58.69	0.82	V	59.51	73.98	14.47	PK
8226	40.02	0.82	V	40.84	53.98	13.14	AV
8226	58.93	0.82	H	59.75	73.98	14.23	PK
8226	40.38	0.82	H	41.20	53.98	12.78	AV

Note :

Bluetooth RSDB Data refer to Bluetooth Test Report.

▣ Test Plots


Peak Result (802.11a, Ch.165 3rd Spurious Emissions, Z-H)

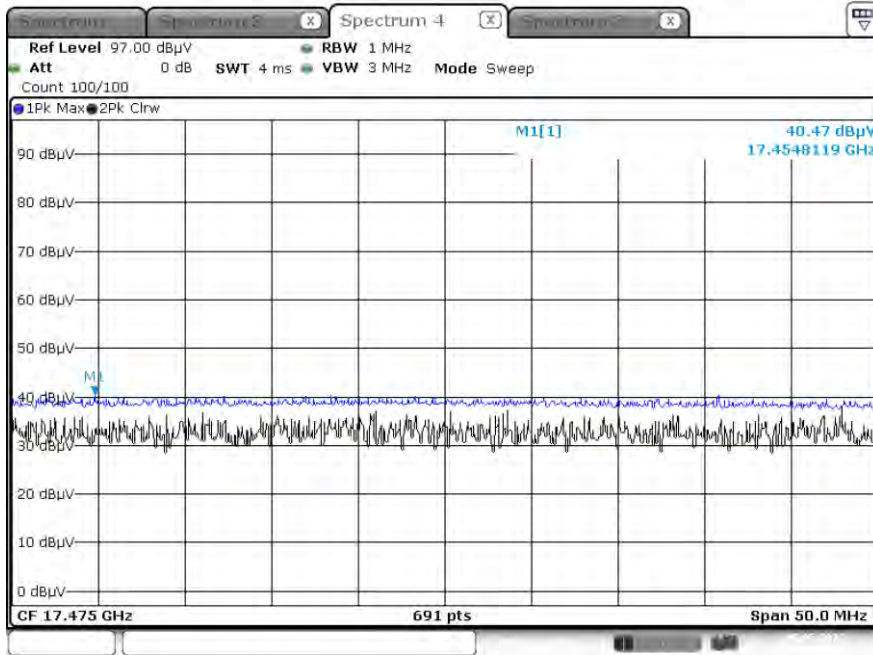

[RSDB Mode]

Bluetooth_Ch. 0_DH5_GFSK + WLAN_5 GHz_802.11a_6 Mbps_Ch.165

Peak Result (3rd Spurious Emissions, Z-H)

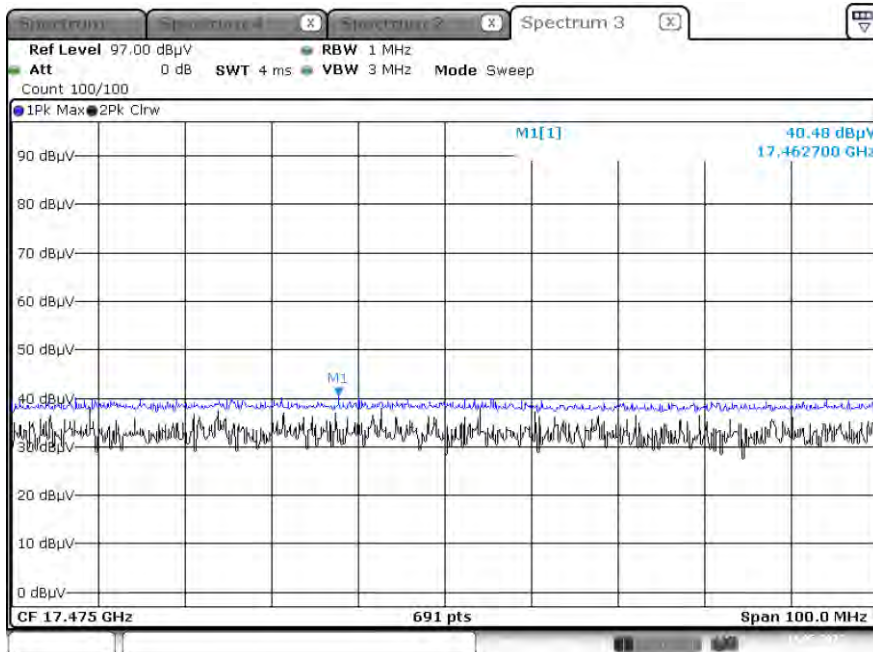

Note:

Only the worst case plots for Radiated Spurious Emissions.

10.9 RADIATED RESTRICTED BAND EDGE

Band : UNII 1
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5180 MHz
 Channel No. 36 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5150	58.08	7.54	H	65.62	73.98	8.36	PK
5150	40.89	7.54	H	48.43	53.98	5.55	AV
5150	57.85	7.54	V	65.39	73.98	8.59	PK
5150	40.51	7.54	V	48.05	53.98	5.93	AV

Band : UNII 2A
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5320 MHz
 Channel No. 64 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5350	59.38	7.21	H	66.59	73.98	7.39	PK
5350	41.27	7.21	H	48.48	53.98	5.50	AV
5350	58.95	7.21	V	66.16	73.98	7.82	PK
5350	41.02	7.21	V	48.23	53.98	5.75	AV

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5460	58.49	7.99	H	66.48	73.98	7.50	PK
5460	38.45	7.99	H	46.44	53.98	7.54	AV
# 5470	56.04	7.94	H	63.98	68.20	4.22	PK
5460	58.22	7.99	V	66.21	73.98	7.77	PK
5460	37.51	7.99	V	45.50	53.98	8.48	AV
# 5470	55.85	7.94	V	63.79	68.20	4.41	PK

Note : # Integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 1
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5150	60.64	7.54	H	68.18	73.98	5.80	PK
5150	41.22	7.54	H	48.76	53.98	5.22	AV
5150	60.32	7.54	V	67.86	73.98	6.12	PK
5150	41.02	7.54	V	48.56	53.98	5.42	AV

Band :	UNII 2A
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5350	61.63	7.21	H	68.84	73.98	5.14	PK
5350	41.30	7.21	H	48.51	53.98	5.47	AV
5350	61.23	7.21	V	68.44	73.98	5.54	PK
5350	41.05	7.21	V	48.26	53.98	5.72	AV

Band :	UNII 2C
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5460	60.48	7.99	H	68.47	73.98	5.51	PK
5460	38.17	7.99	H	46.16	53.98	7.82	AV
# 5470	56.51	7.94	H	64.45	68.20	3.75	PK
5460	60.04	7.99	V	68.03	73.98	5.95	PK
5460	37.85	7.99	V	45.84	53.98	8.14	AV
# 5470	56.22	7.94	V	64.16	68.20	4.04	PK

Note : # Integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 1
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Measured Value [dB μ V]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5150	62.29	7.54	H	69.83	73.98	4.15	PK
5150	41.18	7.54	H	48.72	53.98	5.26	AV
5150	62.01	7.54	V	69.55	73.98	4.43	PK
5150	40.86	7.54	V	48.40	53.98	5.58	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Measured Value [dB μ V]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5350	62.49	7.21	H	69.70	73.98	4.28	PK
5350	42.08	7.21	H	49.29	53.98	4.69	AV
5350	62.12	7.21	V	69.33	73.98	4.65	PK
5350	41.85	7.21	V	49.06	53.98	4.92	AV

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5460	61.26	7.99	H	69.25	73.98	4.73	PK
5460	38.69	7.99	H	46.68	53.98	7.30	AV
# 5470	56.52	7.94	H	64.46	68.20	3.74	PK
5460	60.85	7.99	V	68.84	73.98	5.14	PK
5460	38.48	7.99	V	46.47	53.98	7.51	AV
# 5470	56.02	7.94	V	63.96	68.20	4.24	PK

Note : # Integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 1
Operation Mode:	802.11 n_HT40
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5150	59.04	7.54	H	66.58	73.98	7.40	PK
5150	42.82	7.54	H	50.36	53.98	3.62	AV
5150	58.88	7.54	V	66.42	73.98	7.56	PK
5150	41.85	7.54	V	49.39	53.98	4.59	AV

Band : UNII 2A
 Operation Mode: 802.11 n_HT40
 Transfer MCS Index: 0
 Operating Frequency 5310 MHz
 Channel No. 62 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5350	63.53	7.21	H	70.74	73.98	3.24	PK
5350	43.53	7.21	H	50.74	53.98	3.24	AV
5350	63.12	7.21	V	70.33	73.98	3.65	PK
5350	43.12	7.21	V	50.33	53.98	3.65	AV

Band : UNII 2C
 Operation Mode: 802.11 n_HT40
 Transfer MCS Index: 0
 Operating Frequency 5510 MHz
 Channel No. 102 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5460	58.51	7.99	H	66.50	73.98	7.48	PK
5460	36.20	7.99	H	44.19	53.98	9.79	AV
# 5470	54.22	7.94	H	62.16	68.20	6.04	PK
5460	58.22	7.99	V	66.21	73.98	7.77	PK
5460	35.85	7.99	V	43.84	53.98	10.14	AV
# 5470	53.85	7.94	V	61.79	68.20	6.41	PK

Note : # Integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 1
Operation Mode:	802.11 ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5150	58.95	7.54	H	66.49	73.98	7.49	PK
5150	42.55	7.54	H	50.09	53.98	3.89	AV
5150	58.52	7.54	V	66.06	73.98	7.92	PK
5150	41.62	7.54	V	49.16	53.98	4.82	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5350	62.87	7.21	H	70.08	73.98	3.90	PK
5350	42.94	7.21	H	50.15	53.98	3.83	AV
5350	62.55	7.21	V	69.76	73.98	4.22	PK
5350	42.62	7.21	V	49.83	53.98	4.15	AV

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5460	58.94	7.99	H	66.93	73.98	7.05	PK
5460	36.24	7.99	H	44.23	53.98	9.75	AV
# 5470	55.00	7.94	H	62.94	68.20	5.26	PK
5460	58.56	7.99	V	66.55	73.98	7.43	PK
5460	36.02	7.99	V	44.01	53.98	9.97	AV
# 5470	54.85	7.94	V	62.79	68.20	5.41	PK

Note : # Integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 1
Operation Mode:	802.11 ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5210 MHz
Channel No.	42 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5150	57.70	7.54	H	65.24	73.98	8.74	PK
5150	43.35	7.54	H	50.89	53.98	3.09	AV
5150	57.32	7.54	V	64.86	73.98	9.12	PK
5150	42.68	7.54	V	50.22	53.98	3.76	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5290 MHz
Channel No.	58 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5350	57.16	7.21	H	64.37	73.98	9.61	PK
5350	43.50	7.21	H	50.71	53.98	3.27	AV
5350	56.85	7.21	V	64.06	73.98	9.92	PK
5350	42.58	7.21	V	49.79	53.98	4.19	AV

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5530 MHz
Channel No.	106 Ch

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L- A.G+ATT+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
5460	56.96	7.99	H	64.95	73.98	9.03	PK
5460	42.12	7.99	H	50.11	53.98	3.87	AV
# 5470	52.24	7.94	H	60.18	68.20	8.02	PK
5460	56.75	7.99	V	64.74	73.98	9.24	PK
5460	41.55	7.99	V	49.54	53.98	4.44	AV
# 5470	51.85	7.94	V	59.79	68.20	8.41	PK


Note : # Integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

▣ Test Plots(UNII 1, 2A, 2C)

Average Result_(802.11 n_HT40, MCS0, Ch.62, X-H)



Peak Result (802.11 n_HT40, MCS0, Ch.62, X-H)

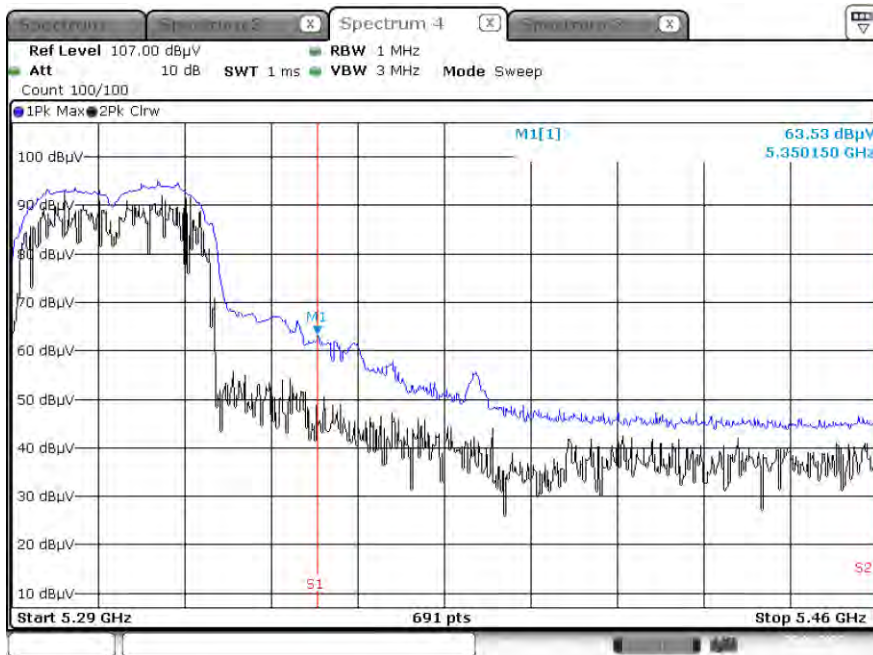


Note:


Only the worst case plots for Radiated Restricted Band Edge.

▣ Test Plots(Straddle Channel)


Peak Result (802.11a, Ch.144, X-H)

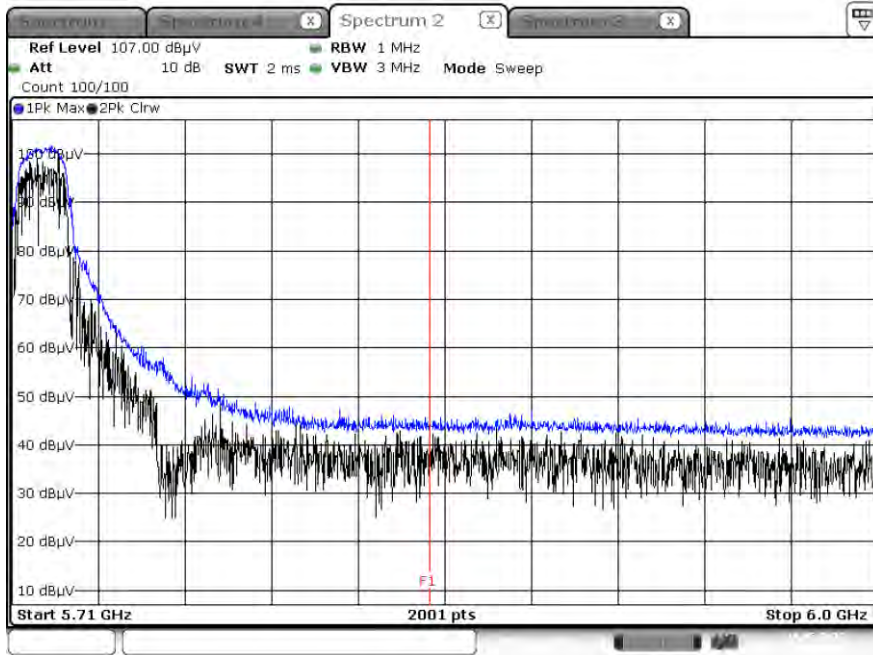


Peak Result (802.11n_HT20, Ch.144, X-H)

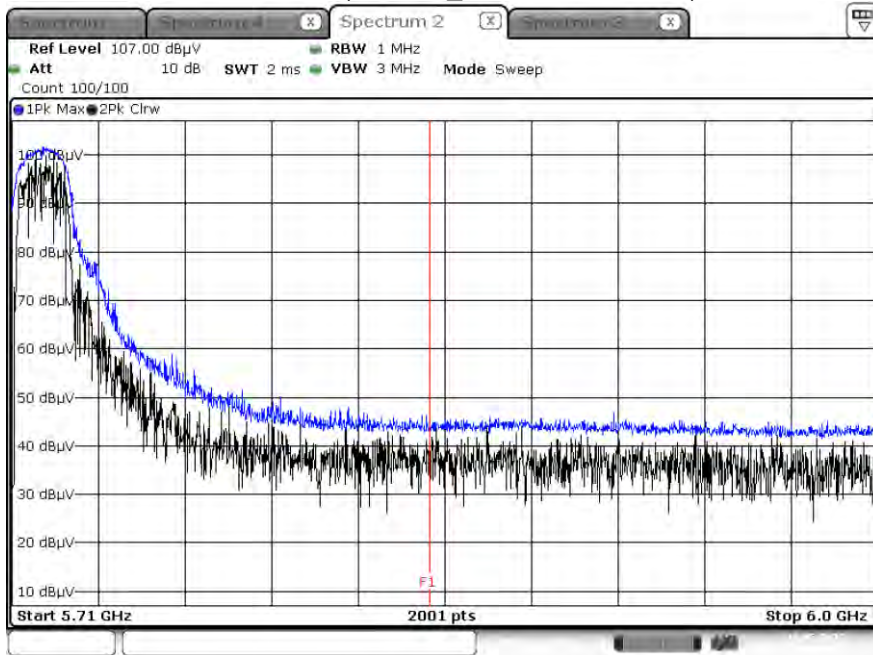


Peak Result (802.11ac_VHT20, Ch.144, X-H)

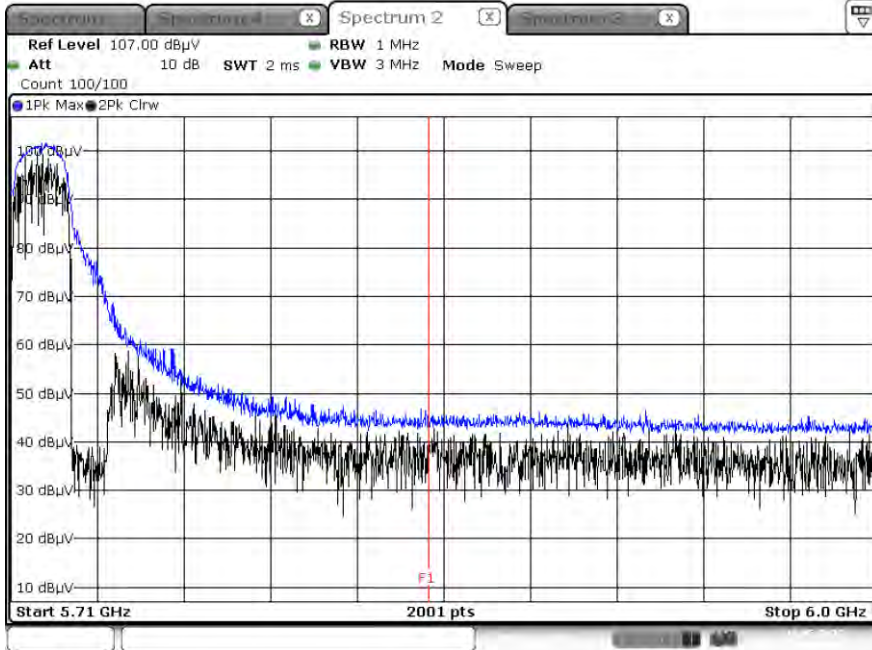


Peak Result (802.11n_HT40, Ch.142, X-H)

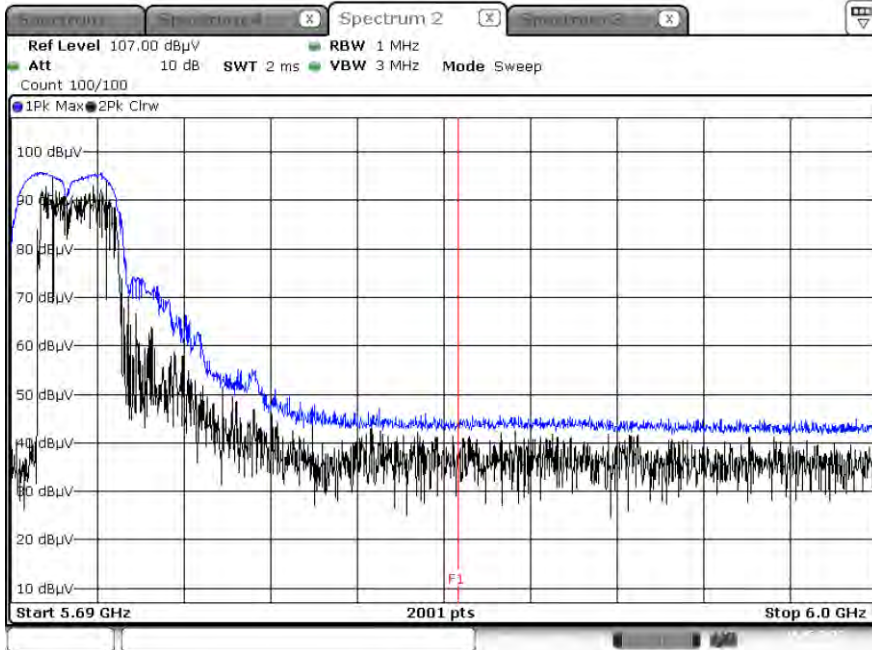

Peak Result (802.11ac_VHT40, Ch.142, X-H)

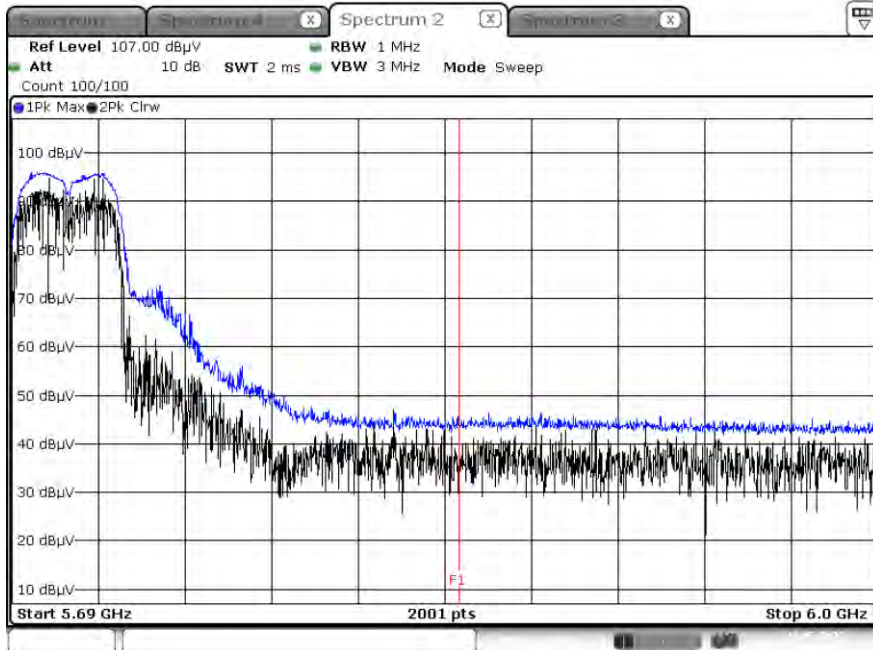

Peak Result (802.11ac_VHT80, Ch.138, X-H)

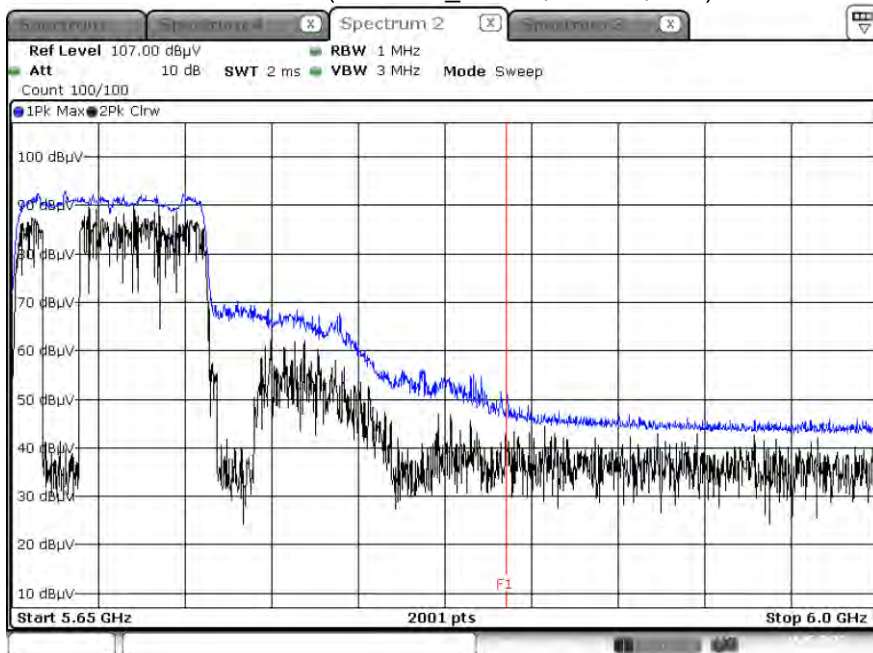


Note :


1. Only the worst case plots for Radiated Restricted Band Edge.
2. Red line : 5 850 MHz
3. Ambient Noise (Because of ambient noise, We attached only the worst plot without a data table)

▣ Test Plots(UNII 3)


Peak Result (802.11a, Ch.149, X-H)

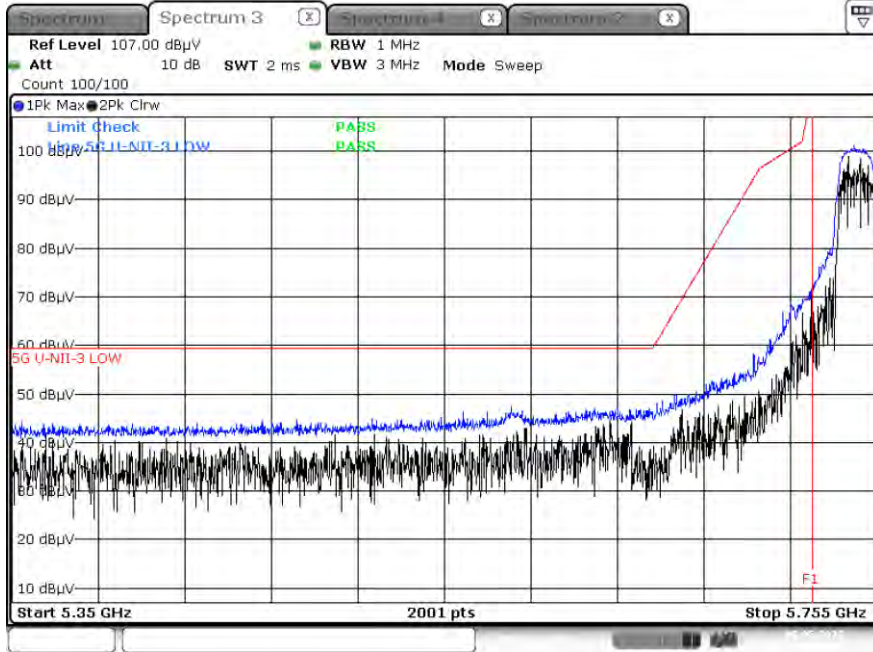


Peak Result (802.11n_HT20, Ch.149, X-H)

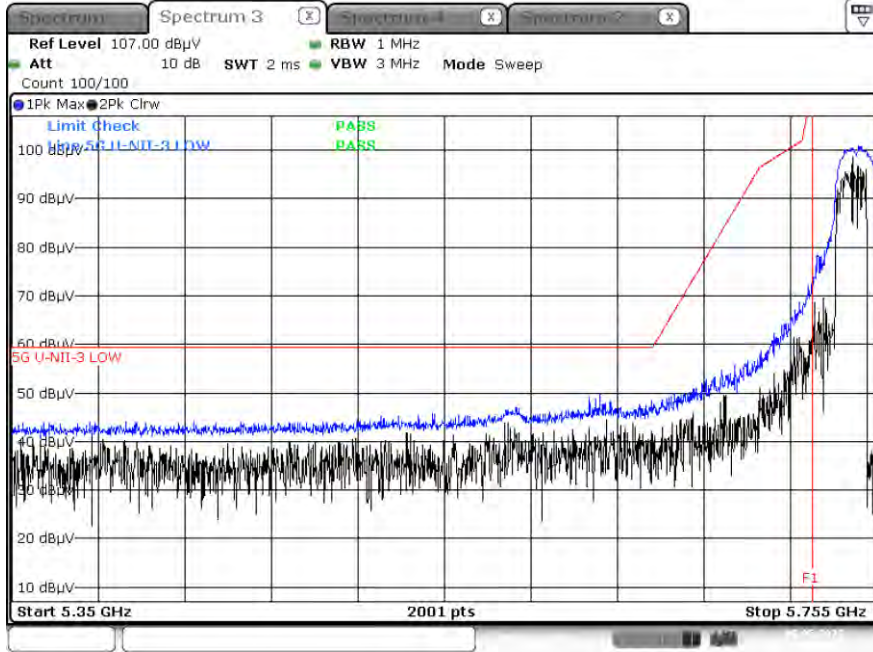


Peak Result (802.11ac_VHT20, Ch.149, X-H)

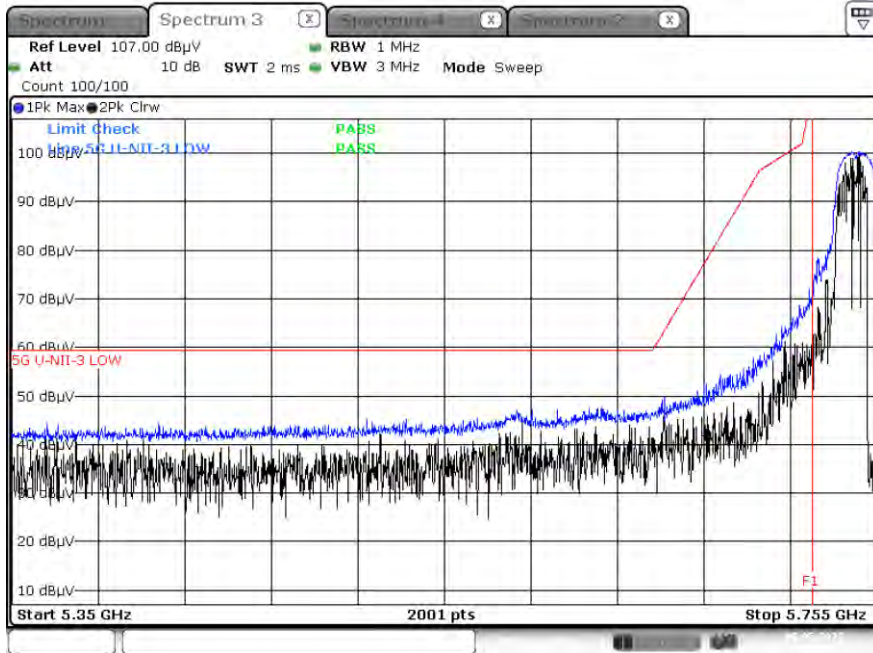


Peak Result (802.11n_HT40, Ch.151, X-H)

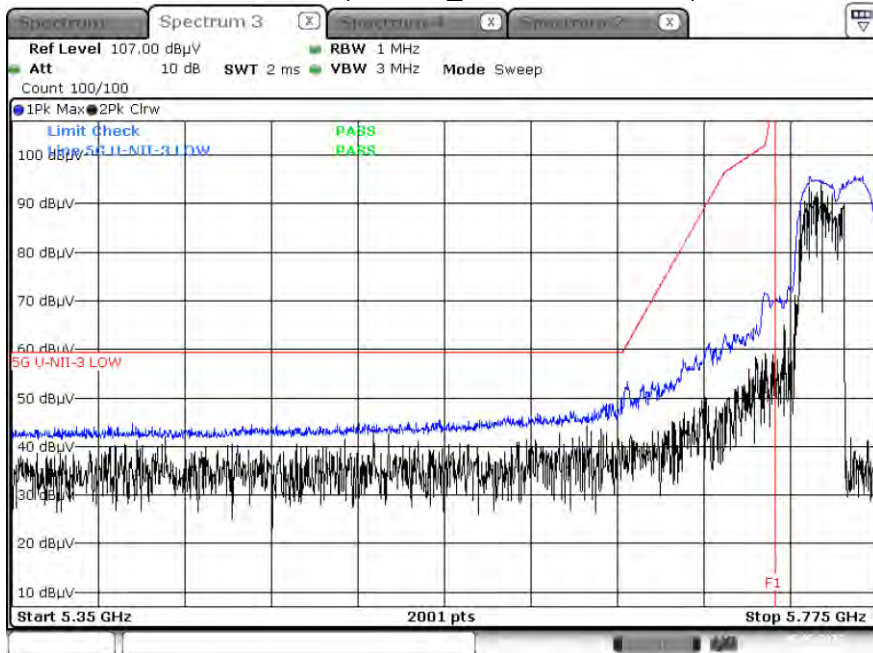


Peak Result (802.11ac_VHT40, Ch.151, X-H)

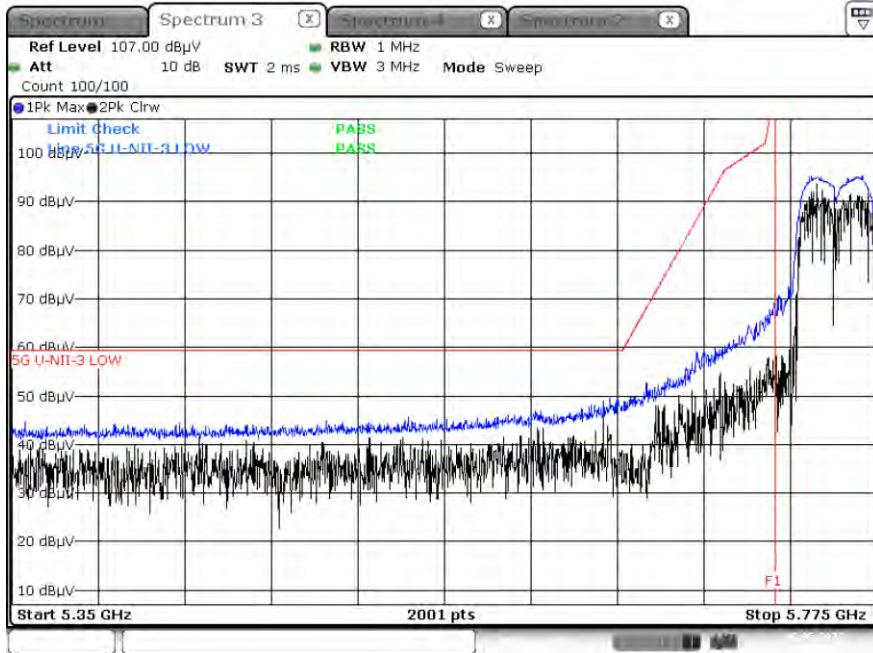


Peak Result (802.11ac_VHT80, Ch.155, X-H)

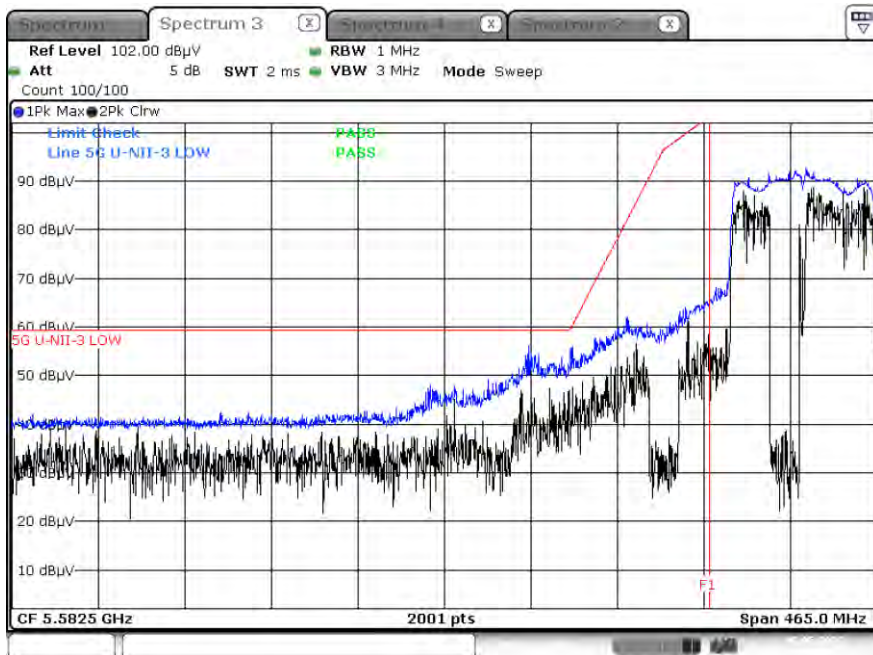


Peak Result (802.11a, Ch.165, X-H)

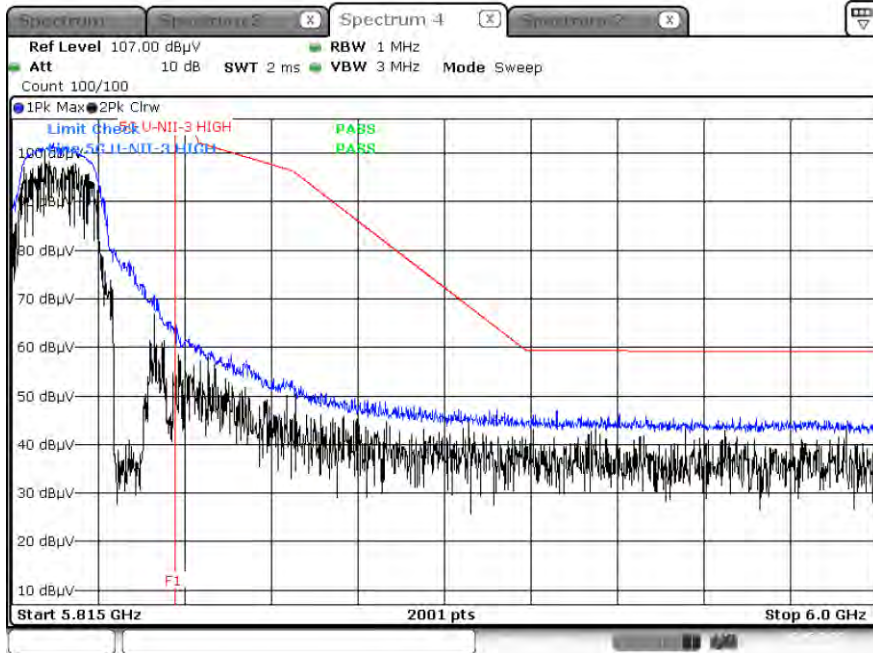


Peak Result (802.11n_HT20, Ch.165, X-H)


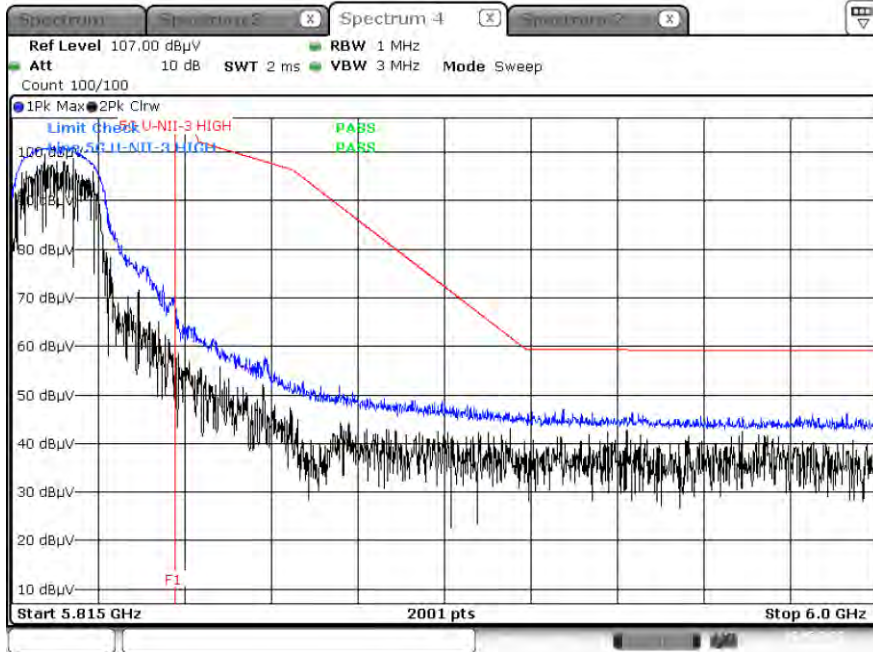


Peak Result (802.11ac_VHT20, Ch.165, X-H)

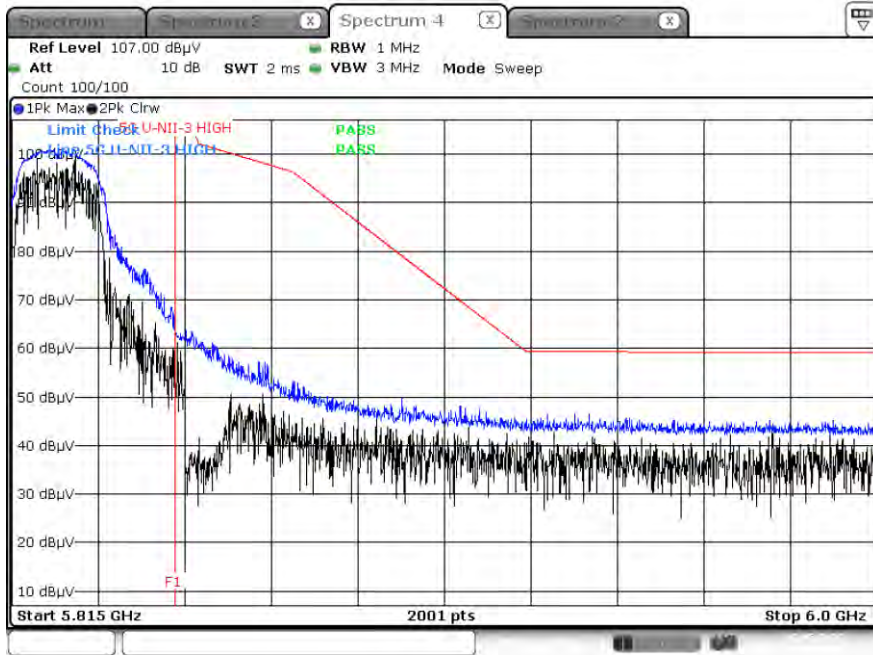

Peak Result (802.11n_HT40, Ch.159, X-H)

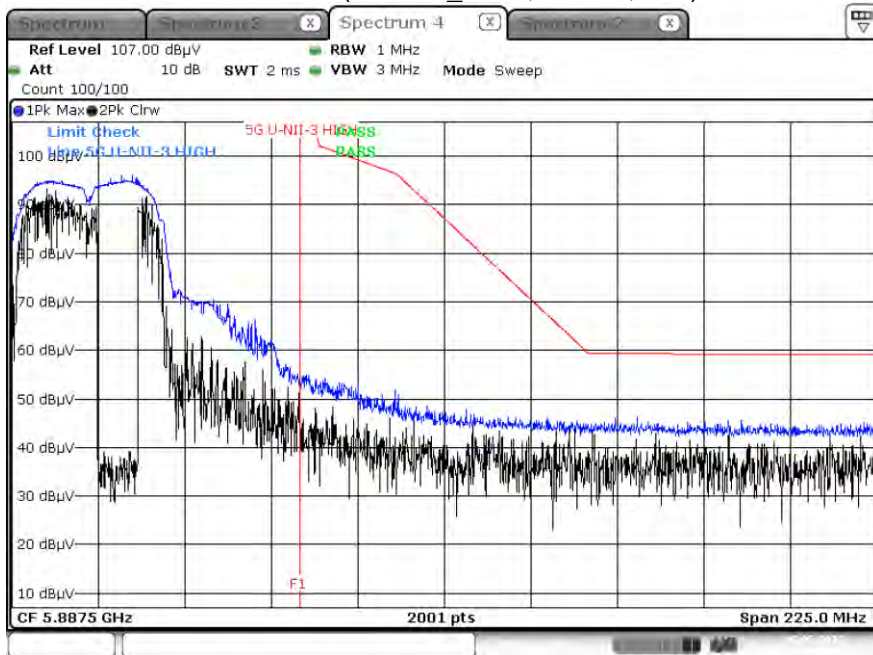

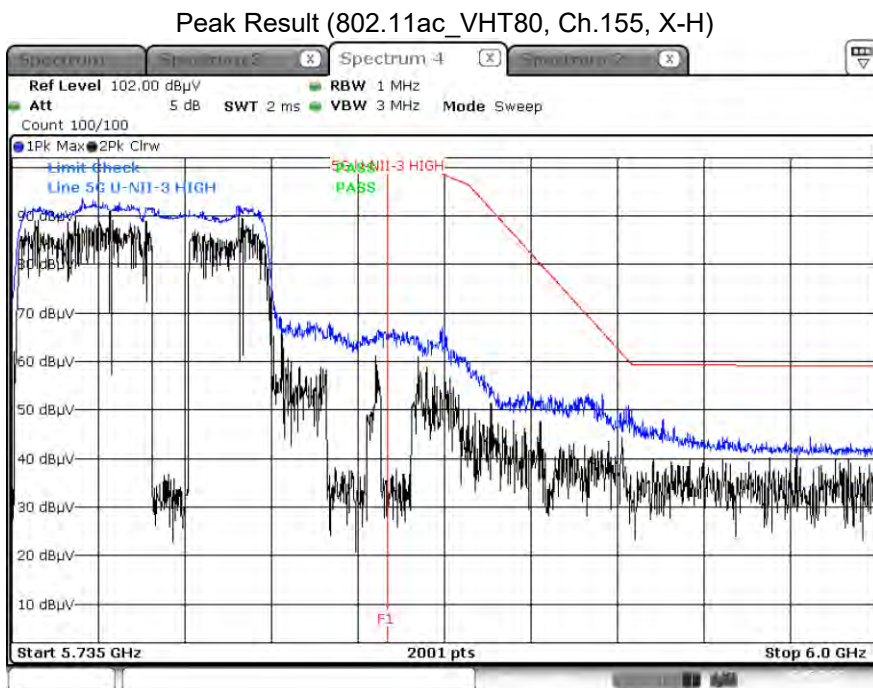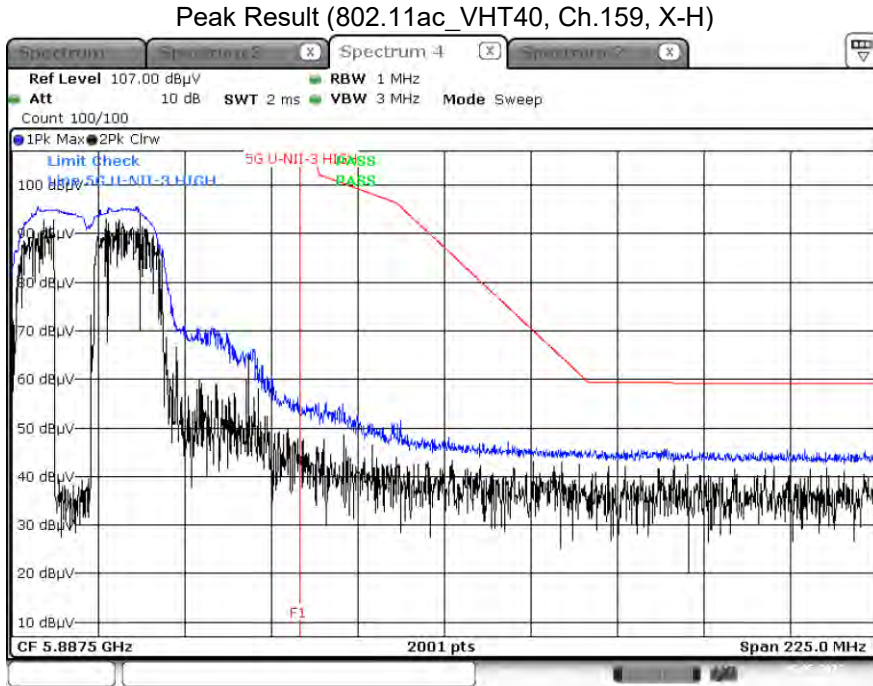

Note :

1. Only the worst case plots for U-NII-3 Out of Band e.i.r.p Emission.
2. U-NII-3 Low & High Band Edge RedLine is Final Test Limit about factor value compensation.

10.10 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions

Test


1 / 1

Test Report

Common Information

EUT : SM-M346B/DS
 Operating Conditions : 5G WLAN Mode
 Comment :

Full Spectrum

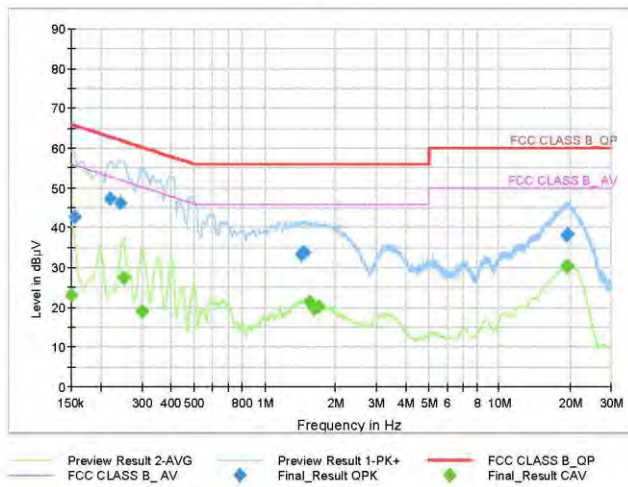

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	42.77	65.75	22.99	1000.0	9.000	N	OFF	9.6
0.2198	47.18	62.83	15.65	1000.0	9.000	N	OFF	9.6
0.2445	46.09	61.94	15.85	1000.0	9.000	N	OFF	9.6
1.4315	33.36	56.00	22.64	1000.0	9.000	N	OFF	9.7
1.4393	33.07	56.00	22.93	1000.0	9.000	N	OFF	9.7
1.4720	33.77	56.00	22.23	1000.0	9.000	N	OFF	9.7
19.3190	38.04	60.00	21.96	1000.0	9.000	L1	OFF	10.3
19.4180	38.06	60.00	21.94	1000.0	9.000	L1	OFF	10.3
19.4765	38.45	60.00	21.55	1000.0	9.000	L1	OFF	10.3

Final Result CAV

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	23.21	56.00	32.79	1000.0	9.000	N	OFF	9.6
0.2513	27.32	51.72	24.40	1000.0	9.000	N	OFF	9.6
0.3008	19.15	50.22	31.07	1000.0	9.000	N	OFF	9.6
1.5575	21.44	46.00	24.56	1000.0	9.000	L1	OFF	9.7
1.6228	19.63	46.00	26.37	1000.0	9.000	L1	OFF	9.7
1.6970	20.22	46.00	25.78	1000.0	9.000	L1	OFF	9.7
19.3483	30.28	50.00	19.72	1000.0	9.000	L1	OFF	10.3
19.3573	30.21	50.00	19.79	1000.0	9.000	L1	OFF	10.3
19.5148	30.29	50.00	19.71	1000.0	9.000	L1	OFF	10.3

2023-05-14

오후 3:46:46

11. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/22/2023	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	02/22/2024	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	09/06/2023	Annual
Power Meter	N1911A	Agilent	MY45100523	03/06/2024	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/06/2024	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2023	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2024	Annual
DC Power Supply	E3632A	Agilent	KR75305528	01/03/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	06/21/2023	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/08/2024	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/16/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
EM1000 / Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Amp &Filter Bank Switch Controller	FBSM-01B	TNM system	TM19050002	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1300	01/18/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-2296	05/18/2024	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/12/2024	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/05/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/13/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/13/2023	Annual
High Pass Filter(7 GHz ~ 18 GHz)	WHKX10-7150-8000-18000-50SS	Wainwright Instruments	1	03/02/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/02/2024	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/28/2024	Annual
RF Switching System	FMSR-05B (HPF(3~18GHz) + LNA1(1~18GHz))	T&M system	S1L1	01/17/2024	Annual
RF Switching System	FMSR -05B (ATT(10dB) + LNA1(1~18GHz))	T&M system	S1L2	01/17/2024	Annual
RF Switching System	FMSR -05B (ATT(3dB) + LNA1(1~18GHz))	T&M system	S1L3	01/17/2024	Annual
RF Switching System	FMSR -05B (LNA1(1~18GHz))	T&M system	S1L4	01/17/2024	Annual
RF Switching System	FMSR -05B (HPF(7~18GHz) + LNA2(6~18GHz))	T&M system	S1L5	01/17/2024	Annual
RF Switching System	FMSR -05B (Thru(30MHz ~ 18GHz))	T&M system	S1L6	01/17/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2305-FC101-P