

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
May 25, 2023

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2305-FC087

FCC ID: A3LSMM346B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-M346B/DS
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §24, §2

Main 2 Ant

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M10G7D	QPSK	0.145	21.61
		1M10W7D	16QAM	0.121	20.84
		1M10W7D	64QAM	0.097	19.88
		1M10W7D	256QAM	0.048	16.83
LTE – Band2 (3)	1851.5 - 1908.5	2M73G7D	QPSK	0.146	21.63
		2M72W7D	16QAM	0.122	20.85
		2M71W7D	64QAM	0.097	19.87
		2M71W7D	256QAM	0.049	16.88
LTE – Band2 (5)	1852.5 - 1907.5	4M54G7D	QPSK	0.145	21.60
		4M52W7D	16QAM	0.122	20.87
		4M52W7D	64QAM	0.096	19.84
		4M53W7D	256QAM	0.048	16.85
LTE – Band2 (10)	1855.0 - 1905.0	9M02G7D	QPSK	0.152	21.83
		9M01W7D	16QAM	0.126	21.01
		9M01W7D	64QAM	0.101	20.05
		9M01W7D	256QAM	0.051	17.08
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.153	21.85
		13M5W7D	16QAM	0.128	21.08
		13M5W7D	64QAM	0.103	20.12
		13M5W7D	256QAM	0.052	17.12
LTE – Band2 (20)	1860.0 - 1900.0	18M0G7D	QPSK	0.152	21.83
		17M9W7D	16QAM	0.127	21.03
		18M0W7D	64QAM	0.102	20.09
		18M0W7D	256QAM	0.051	17.05

Main 3 Ant

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M09G7D	QPSK	0.145	21.62
		1M10W7D	16QAM	0.116	20.66
		1M09W7D	64QAM	0.094	19.71
		1M10W7D	256QAM	0.048	16.85
LTE – Band2 (3)	1851.5 - 1908.5	2M71G7D	QPSK	0.141	21.48
		2M71W7D	16QAM	0.112	20.51
		2M71W7D	64QAM	0.094	19.74
		2M71W7D	256QAM	0.047	16.72
LTE – Band2 (5)	1852.5 - 1907.5	4M53G7D	QPSK	0.140	21.47
		4M52W7D	16QAM	0.112	20.50
		4M53W7D	64QAM	0.090	19.54
		4M54W7D	256QAM	0.047	16.71
LTE – Band2 (10)	1855.0 - 1905.0	9M03G7D	QPSK	0.144	21.57
		9M01W7D	16QAM	0.116	20.66
		9M01W7D	64QAM	0.093	19.70
		9M02W7D	256QAM	0.048	16.79
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.147	21.66
		13M5W7D	16QAM	0.120	20.78
		13M5W7D	64QAM	0.096	19.83
		13M5W7D	256QAM	0.049	16.90
LTE – Band2 (20)	1860.0 - 1900.0	17M9G7D	QPSK	0.145	21.60
		17M9W7D	16QAM	0.120	20.80
		17M9W7D	64QAM	0.095	19.80
		17M9W7D	256QAM	0.048	16.79

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2305-FC087

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Kwon Jeong
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC087	May 25, 2023	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	3
1. GENERAL INFORMATION	7
2. INTRODUCTION	8
2.1. DESCRIPTION OF EUT	8
2.2. MEASURING INSTRUMENT CALIBRATION	8
2.3. TEST FACILITY	8
3. DESCRIPTION OF TESTS.....	9
3.1 TEST PROCEDURE	9
3.2 RADIATED POWER.....	10
3.3 RADIATED SPURIOUS EMISSIONS	11
3.4 PEAK- TO- AVERAGE RATIO.....	12
3.5 OCCUPIED BANDWIDTH.	14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	15
3.7 BAND EDGE	16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
3.9 WORST CASE(RADIATED TEST)	18
3.10 WORST CASE(CONDUCTED TEST)	20
4. LIST OF TEST EQUIPMENT	21
5. MEASUREMENT UNCERTAINTY	22
6. SUMMARY OF TEST RESULTS	23
7. SAMPLE CALCULATION	24
8. TEST DATA (Main 2 Ant).....	26
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	26
8.2 RADIATED SPURIOUS EMISSIONS	29
8.3 PEAK-TO-AVERAGE RATIO.....	30
8.4 OCCUPIED BANDWIDTH	31
8.5 CONDUCTED SPURIOUS EMISSIONS	32
8.6 BAND EDGE	33
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	34
9. TEST DATA (Main 3 Ant).....	52
9.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	52
9.2 RADIATED SPURIOUS EMISSIONS	55
9.3 PEAK-TO-AVERAGE RATIO.....	56
9.4 OCCUPIED BANDWIDTH	57
9.5 CONDUCTED SPURIOUS EMISSIONS	58
9.6 BAND EDGE	59
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	60

11. TEST PLOTS (Main 2 Ant) 78
12. TEST PLOTS (Main 3 Ant) 199
13. APPENDIX A_ TEST SETUP PHOTO 320

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMM346B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§24, §2
EUT Type:	Mobile phone
Model(s):	SM-M346B/DS
Tx Frequency:	1850.7 MHz – 1909.3 MHz (LTE – Band2 (1.4 MHz)) 1851.5 MHz – 1908.5 MHz (LTE – Band2 (3 MHz)) 1852.5 MHz – 1907.5 MHz (LTE – Band2 (5 MHz)) 1855.0 MHz – 1905.0 MHz (LTE – Band2 (10 MHz)) 1857.5 MHz – 1902.5 MHz (LTE – Band2 (15 MHz)) 1860.0 MHz – 1900.0 MHz (LTE – Band2 (20 MHz))
Date(s) of Tests:	April 24, 2023 ~ May 18, 2023
Serial number:	Radiated: R3CW403ATTN (Main 2 Ant) , R3CW403B9YL (Main 3 Ant) Conducted: R3CW403A4AZ (Main 2 Ant), R3CW403A4ZL (Main 3 Ant)

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac (20/40/80 MHz), Bluetooth, BT LE, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

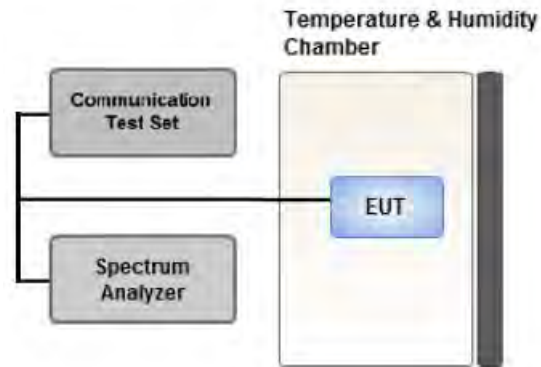

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .
Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

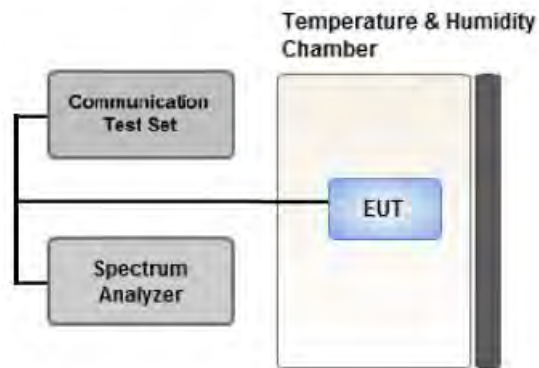

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

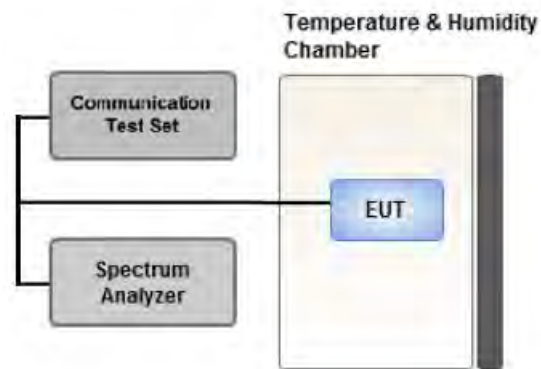

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep \geq 2 * Span / RBW

3.7 BAND EDGE

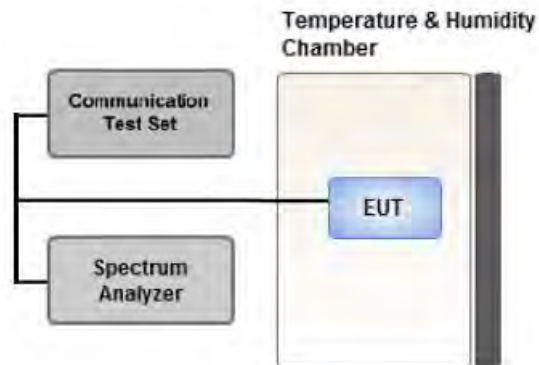

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz}/ \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

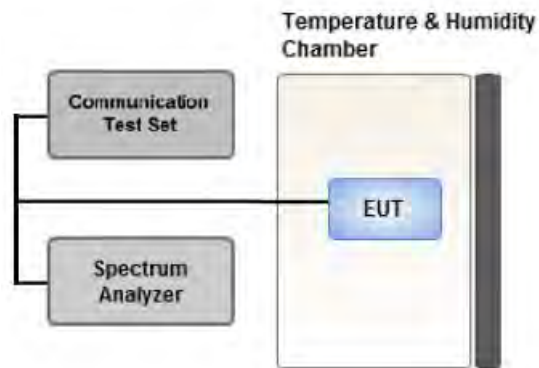

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
 Mode : Stand alone, Simultaneous transmission scenarios
 Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported.
 (Main 2 Ant Worst case : 15 MHz)
 (Main 3 Ant Worst case : 15 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.

[Main 2 Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

[Main 3 Ant Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset	Axis			
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1.4	Low, Mid High	1	0	X			
		3	Low, High	1	14				
			Mid	1	0				
		5	Low	1	13				
			Mid	1	0				
			High	1	24				
		10	Low, Mid	1	49				
			High	1	0				
		15	Low, High	1	0				
			Mid	1	74				
		20	Low, Mid	1	99				
			High	1	0				
		Radiated Spurious and Harmonic Emissions	QPSK	15	Low, High		1	0	X
					Mid		1	74	

3.10 WORST CASE(CONDUCTED TEST)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset		
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Band Edge	QPSK	1.4	Low	1	0		
			High	1	5		
		3	Low	1	0		
			High	1	14		
		5	Low	1	0		
			High	1	24		
		10	Low	1	0		
			High	1	49		
		15	Low	1	0		
			High	1	74		
		20	Low	1	0		
			High	1	99		
				1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
		Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

- All modes of operation were investigated and the worst case configuration results are reported.

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	FBSR-02B(1.2G HPF+LNA)	T&M SYSTEM	F1L1	01/19/2024	Annual
RF Switching System	FBSR-02B(3.3G HPF+LNA)	T&M SYSTEM	F1L2	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/21/2023	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2023	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/29/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2023	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	12/01/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.16 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.57 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §24.238(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§24.235	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§24.232(c)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §24.238(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA (Main 2 Ant)

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1850.7	LTE B2/ 1.4 MHz	QPSK	-20.44	13.34	10.40	2.13	H	< 2.00	0.145	21.61	
		16-QAM	-21.21	12.57	10.40	2.13	H		0.121	20.84	
		64-QAM	-22.17	11.61	10.40	2.13	H		0.097	19.88	
		256-QAM	-25.22	8.56	10.40	2.13	H		0.048	16.83	
1880.0		QPSK	-21.61	13.01	10.40	2.23	H		0.131	21.18	
		16-QAM	-22.38	12.24	10.40	2.23	H		0.110	20.41	
		64-QAM	-23.37	11.25	10.40	2.23	H		0.088	19.42	
		256-QAM	-26.40	8.22	10.40	2.23	H		0.044	16.39	
1909.3		QPSK	-21.52	13.05	10.40	2.14	H		0.135	21.31	
		16-QAM	-22.35	12.22	10.40	2.14	H		0.112	20.48	
		64-QAM	-23.26	11.31	10.40	2.14	H		0.091	19.57	
		256-QAM	-26.31	8.26	10.40	2.14	H		0.045	16.52	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1851.5	LTE B2/ 3 MHz	QPSK	-20.42	13.36	10.40	2.13	H	< 2.00	0.146	21.63	
		16-QAM	-21.20	12.58	10.40	2.13	H		0.122	20.85	
		64-QAM	-22.18	11.60	10.40	2.13	H		0.097	19.87	
		256-QAM	-25.17	8.61	10.40	2.13	H		0.049	16.88	
1880.0		QPSK	-21.47	13.15	10.40	2.23	H		0.136	21.32	
		16-QAM	-22.25	12.37	10.40	2.23	H		0.113	20.54	
		64-QAM	-23.21	11.41	10.40	2.23	H		0.091	19.58	
		256-QAM	-26.19	8.43	10.40	2.23	H		0.046	16.60	
1908.5		QPSK	-21.39	13.18	10.40	2.14	H		0.139	21.44	
		16-QAM	-22.18	12.39	10.40	2.14	H		0.116	20.65	
		64-QAM	-23.16	11.41	10.40	2.14	H		0.093	19.67	
		256-QAM	-26.18	8.39	10.40	2.14	H		0.046	16.65	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1852.5	LTE B2/ 5 MHz	QPSK	-20.45	13.33	10.40	2.13	H	< 2.00	0.145	21.60	
		16-QAM	-21.18	12.60	10.40	2.13	H		0.122	20.87	
		64-QAM	-22.21	11.57	10.40	2.13	H		0.096	19.84	
		256-QAM	-25.20	8.58	10.40	2.13	H		0.048	16.85	
1880.0		QPSK	-21.28	13.34	10.40	2.23	H		0.142	21.51	
		16-QAM	-21.98	12.64	10.40	2.23	H		0.121	20.81	
		64-QAM	-22.99	11.63	10.40	2.23	H		0.096	19.80	
		256-QAM	-25.98	8.64	10.40	2.23	H		0.048	16.81	
1907.5		QPSK	-21.57	13.00	10.40	2.14	H		0.134	21.26	
		16-QAM	-22.31	12.26	10.40	2.14	H		0.113	20.52	
		64-QAM	-23.27	11.30	10.40	2.14	H		0.090	19.56	
		256-QAM	-26.32	8.25	10.40	2.14	H		0.045	16.51	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1855.0	LTE B2/ 10 MHz	QPSK	-20.38	13.58	10.40	2.15	H	< 2.00	0.152	21.83	
		16-QAM	-21.22	12.74	10.40	2.15	H		0.126	20.99	
		64-QAM	-22.17	11.79	10.40	2.15	H		0.101	20.04	
		256-QAM	-25.16	8.80	10.40	2.15	H		0.051	17.05	
1880.0		QPSK	-20.97	13.65	10.40	2.23	H		0.152	21.82	
		16-QAM	-21.78	12.84	10.40	2.23	H		0.126	21.01	
		64-QAM	-22.74	11.88	10.40	2.23	H		0.101	20.05	
		256-QAM	-25.71	8.91	10.40	2.23	H		0.051	17.08	
1905.0		QPSK	-21.26	13.32	10.40	2.16	H		0.143	21.56	
		16-QAM	-22.10	12.48	10.40	2.16	H		0.118	20.72	
		64-QAM	-23.07	11.51	10.40	2.16	H		0.094	19.75	
		256-QAM	-26.08	8.50	10.40	2.16	H		0.047	16.74	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1857.5	LTE B2/ 15 MHz	QPSK	-20.52	13.62	10.40	2.17	H	< 2.00	0.153	21.85	
		16-QAM	-21.29	12.85	10.40	2.17	H		0.128	21.08	
		64-QAM	-22.25	11.89	10.40	2.17	H		0.103	20.12	
		256-QAM	-25.25	8.89	10.40	2.17	H		0.052	17.12	
1880.0		QPSK	-21.23	13.39	10.40	2.23	H		0.143	21.56	
		16-QAM	-22.02	12.60	10.40	2.23	H		0.119	20.77	
		64-QAM	-22.98	11.64	10.40	2.23	H		0.096	19.81	
		256-QAM	-26.02	8.60	10.40	2.23	H		0.048	16.77	
1902.5		QPSK	-21.36	13.23	10.40	2.18	H		0.140	21.45	
		16-QAM	-22.13	12.46	10.40	2.18	H		0.117	20.68	
		64-QAM	-23.08	11.51	10.40	2.18	H		0.094	19.73	
		256-QAM	-26.09	8.50	10.40	2.18	H		0.047	16.72	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1860.0	LTE B2/ 20 MHz	QPSK	-20.54	13.60	10.40	2.17	H	< 2.00	0.152	21.83	
		16-QAM	-21.34	12.80	10.40	2.17	H		0.127	21.03	
		64-QAM	-22.28	11.86	10.40	2.17	H		0.102	20.09	
		256-QAM	-25.32	8.82	10.40	2.17	H		0.051	17.05	
1880.0		QPSK	-21.04	13.58	10.40	2.23	H		0.150	21.75	
		16-QAM	-21.87	12.75	10.40	2.23	H		0.124	20.92	
		64-QAM	-22.80	11.82	10.40	2.23	H		0.100	19.99	
		256-QAM	-25.79	8.83	10.40	2.23	H		0.050	17.00	
1900.0		QPSK	-21.64	12.95	10.40	2.18	H		0.131	21.17	
		16-QAM	-22.44	12.15	10.40	2.18	H		0.109	20.37	
		64-QAM	-23.41	11.18	10.40	2.18	H		0.087	19.40	
		256-QAM	-26.41	8.18	10.40	2.18	H		0.044	16.40	

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 1857.5 MHz
- ▣ MEASURED OUTPUT POWER: 21.85 dBm = 0.153 W
- ▣ MODE: LTE B2
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 34.85 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18675 (1857.5)	3 715.00	-52.36	12.30	-57.48	3.16	H	-48.34	70.19
	5 572.50	-55.79	13.40	-53.66	3.93	V	-44.19	66.04
	7 430.00	-55.82	10.80	-45.49	4.57	V	-39.26	61.11
18900 (1880.0)	3 760.00	-49.52	12.32	-54.02	3.08	H	-44.78	66.63
	5 640.00	-54.28	13.10	-52.47	3.90	H	-43.27	65.13
	7 520.00	-57.72	10.84	-47.14	4.61	H	-40.91	62.77
19125 (1902.5)	3 805.00	-52.15	12.40	-56.66	3.13	H	-47.39	69.24
	5 707.50	-55.84	13.08	-53.41	3.97	V	-44.30	66.16
	7 610.00	-55.30	11.14	-44.73	4.64	V	-38.23	60.08

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	5.85
			16-QAM	6	0	6.50
			64-QAM	6	0	6.79
			256-QAM	6	0	6.94
	3 MHz		QPSK	15	0	5.91
			16-QAM	15	0	6.56
			64-QAM	15	0	6.72
			256-QAM	15	0	6.85
	5 MHz		QPSK	25	0	5.87
			16-QAM	25	0	6.65
			64-QAM	25	0	6.73
			256-QAM	25	0	6.84
	10 MHz		QPSK	50	0	5.95
			16-QAM	50	0	6.57
			64-QAM	50	0	6.77
			256-QAM	50	0	6.86
	15 MHz		QPSK	75	0	5.73
			16-QAM	75	0	6.48
			64-QAM	75	0	6.69
			256-QAM	75	0	6.88
20 MHz	QPSK	100	0	5.76		
	16-QAM	100	0	6.53		
	64-QAM	100	0	6.72		
	256-QAM	100	0	6.92		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 139 ~ 162.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.0997
			16-QAM	6	0	1.0976
			64-QAM	6	0	1.1012
			256-QAM	6	0	1.0951
	3 MHz		QPSK	15	0	2.7272
			16-QAM	15	0	2.7182
			64-QAM	15	0	2.7083
			256-QAM	15	0	2.7110
	5 MHz		QPSK	25	0	4.5412
			16-QAM	25	0	4.5187
			64-QAM	25	0	4.5205
			256-QAM	25	0	4.5274
	10 MHz		QPSK	50	0	9.0234
			16-QAM	50	0	9.0097
			64-QAM	50	0	9.0098
			256-QAM	50	0	9.0138
	15 MHz		QPSK	75	0	13.488
			16-QAM	75	0	13.486
			64-QAM	75	0	13.462
			256-QAM	75	0	13.473
20 MHz	QPSK	100	0	17.986		
	16-QAM	100	0	17.936		
	64-QAM	100	0	17.953		
	256-QAM	100	0	17.959		

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 115 ~ 138.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	3.7039	27.976	-77.149	-49.173	-13.00
		1880.0	3.6850	27.976	-76.765	-48.789	
		1909.3	3.6785	27.976	-77.430	-49.454	
	3	1851.5	3.6990	27.976	-77.071	-49.095	
		1880.0	3.6725	27.976	-76.685	-48.709	
		1908.5	3.7234	27.976	-77.204	-49.228	
	5	1852.5	3.7049	27.976	-77.168	-49.192	
		1880.0	3.6915	27.976	-77.261	-49.285	
		1907.5	3.7159	27.976	-76.992	-49.016	
	10	1855.0	3.6945	27.976	-77.177	-49.201	
		1880.0	3.7005	27.976	-77.248	-49.272	
		1905.0	3.6810	27.976	-77.135	-49.159	
	15	1857.5	3.6870	27.976	-76.879	-48.903	
		1880.0	3.6850	27.976	-77.107	-49.131	
		1902.5	1.9801	27.976	-76.959	-48.983	
	20	1860.0	3.7034	27.976	-77.173	-49.197	
		1880.0	1.9667	27.976	-76.717	-48.741	
		1900.0	1.9781	27.976	-76.773	-48.797	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 163 ~ 198.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 79 ~ 114.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 18607 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1850 699 998	0.0	0.000 000	0.000
100 %		-30	1850 700 000	2.2	0.000 000	0.001
100 %		-20	1850 699 999	1.4	0.000 000	0.001
100 %		-10	1850 699 996	-1.4	0.000 000	-0.001
100 %		0	1850 699 996	-2.0	0.000 000	-0.001
100 %		+10	1850 700 000	1.9	0.000 000	0.001
100 %		+30	1850 699 996	-2.2	0.000 000	-0.001
100 %		+40	1850 700 000	2.6	0.000 000	0.001
100 %		+50	1850 699 996	-1.5	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1850 700 000	1.9	0.000 000

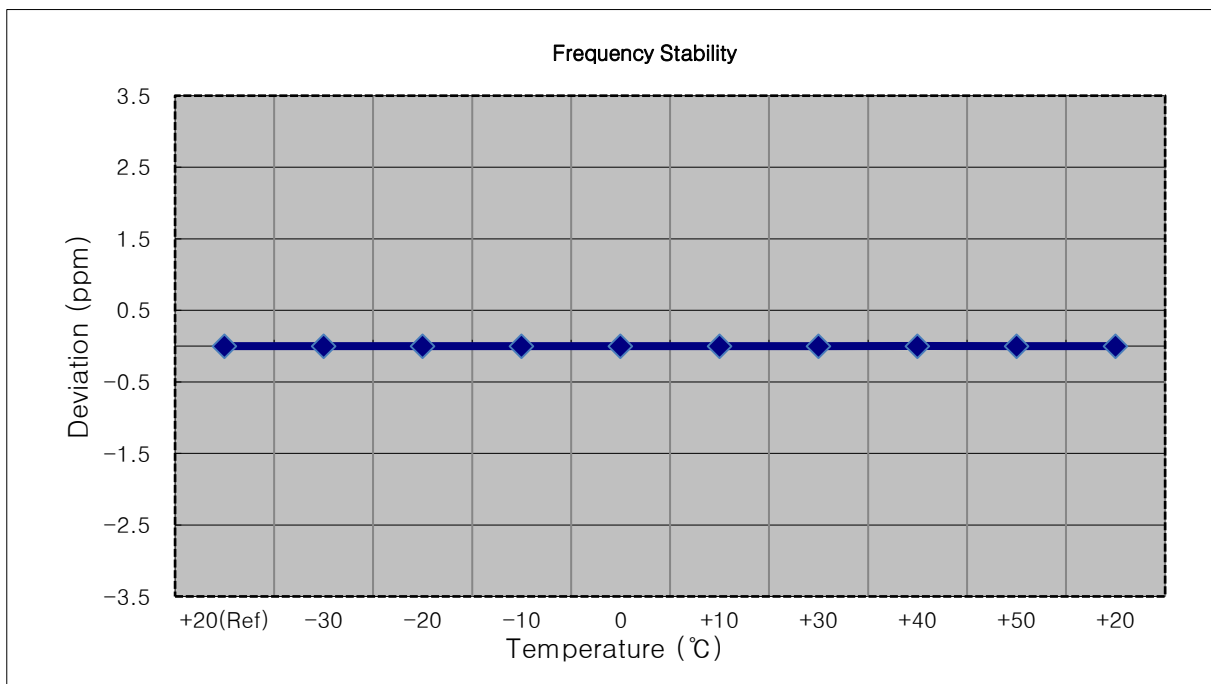


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 18615 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1851 499 999	0.0	0.000 000	0.000
100 %		-30	1851 499 996	-2.4	0.000 000	-0.001
100 %		-20	1851 499 997	-1.3	0.000 000	-0.001
100 %		-10	1851 499 996	-2.5	0.000 000	-0.001
100 %		0	1851 499 997	-1.6	0.000 000	-0.001
100 %		+10	1851 499 996	-2.4	0.000 000	-0.001
100 %		+30	1851 500 002	3.3	0.000 000	0.002
100 %		+40	1851 500 002	3.1	0.000 000	0.002
100 %		+50	1851 500 002	3.1	0.000 000	0.002
Batt. Endpoint	3.400	+20	1851 500 000	1.7	0.000 000	0.001

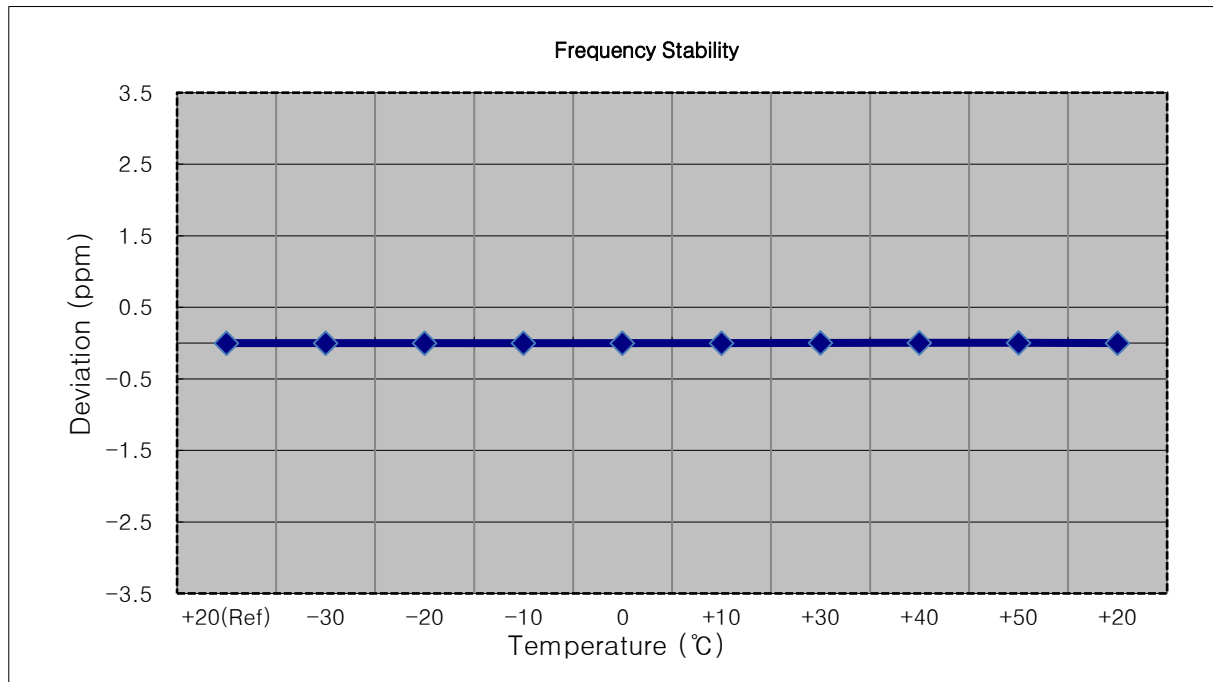


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1852,500,000 Hz
- ▣ CHANNEL: 18625 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1852 499 997	0.0	0.000 000	0.000
100 %		-30	1852 499 999	2.2	0.000 000	0.001
100 %		-20	1852 499 994	-3.1	0.000 000	-0.002
100 %		-10	1852 499 999	1.8	0.000 000	0.001
100 %		0	1852 500 000	2.4	0.000 000	0.001
100 %		+10	1852 499 999	2.1	0.000 000	0.001
100 %		+30	1852 500 001	3.3	0.000 000	0.002
100 %		+40	1852 500 000	2.6	0.000 000	0.001
100 %		+50	1852 499 999	2.0	0.000 000	0.001
Batt. Endpoint		3.400	+20	1852 499 999	2.0	0.000 000

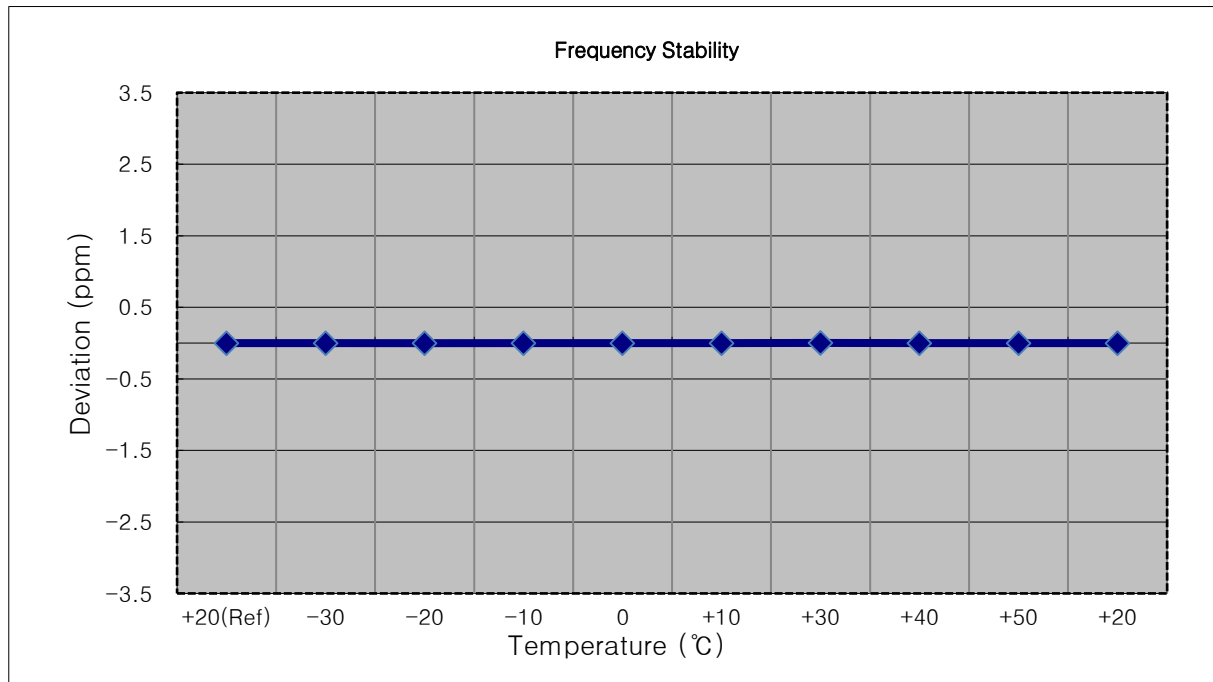


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1855,000,000 Hz
- ▣ CHANNEL: 18650 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1855 000 002	0.0	0.000 000	0.000
100 %		-30	1855 000 000	-2.0	0.000 000	-0.001
100 %		-20	1854 999 999	-2.9	0.000 000	-0.002
100 %		-10	1855 000 000	-1.6	0.000 000	-0.001
100 %		0	1855 000 004	2.3	0.000 000	0.001
100 %		+10	1855 000 000	-1.4	0.000 000	-0.001
100 %		+30	1855 000 004	2.1	0.000 000	0.001
100 %		+40	1855 000 005	3.0	0.000 000	0.002
100 %		+50	1855 000 000	-1.9	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1855 000 003	1.4	0.000 000	0.001

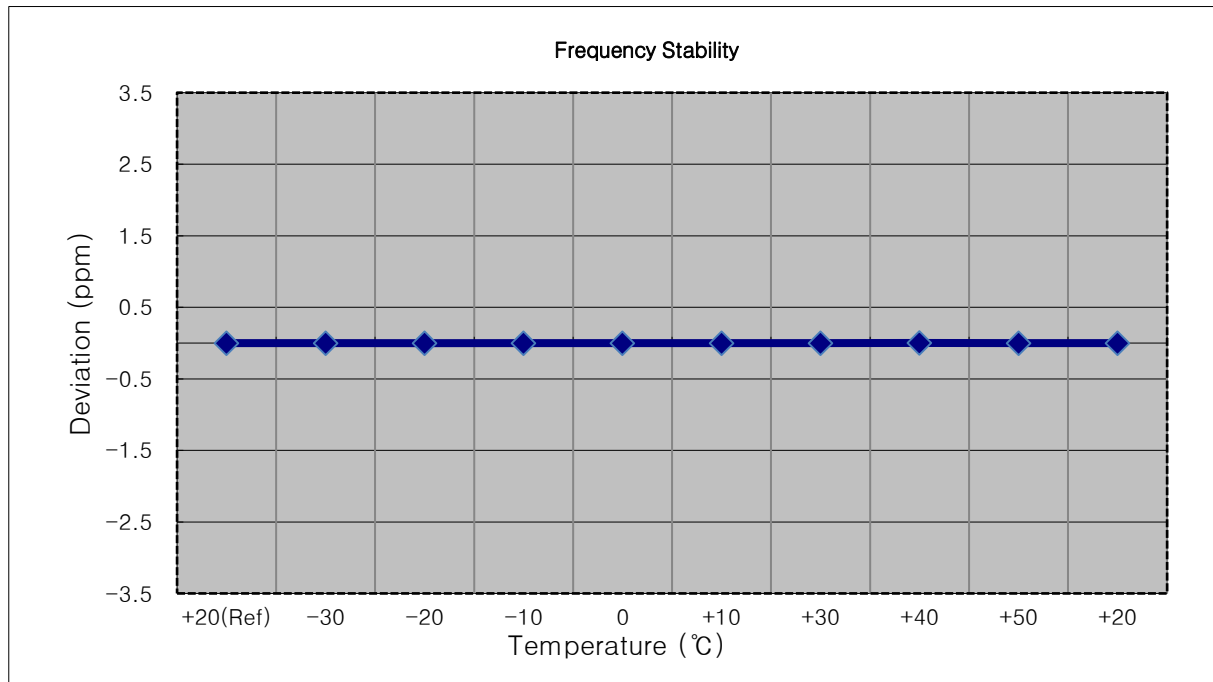


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1857,500,000 Hz
- ▣ CHANNEL: 18675 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1857 500 002	0.0	0.000 000	0.000
100 %		-30	1857 500 000	-2.3	0.000 000	-0.001
100 %		-20	1857 500 004	1.9	0.000 000	0.001
100 %		-10	1857 500 004	1.9	0.000 000	0.001
100 %		0	1857 500 000	-2.1	0.000 000	-0.001
100 %		+10	1857 500 000	-2.1	0.000 000	-0.001
100 %		+30	1857 500 001	-0.7	0.000 000	0.000
100 %		+40	1857 500 004	2.3	0.000 000	0.001
100 %		+50	1857 500 004	1.7	0.000 000	0.001
Batt. Endpoint	3.400	+20	1857 500 003	1.3	0.000 000	0.001

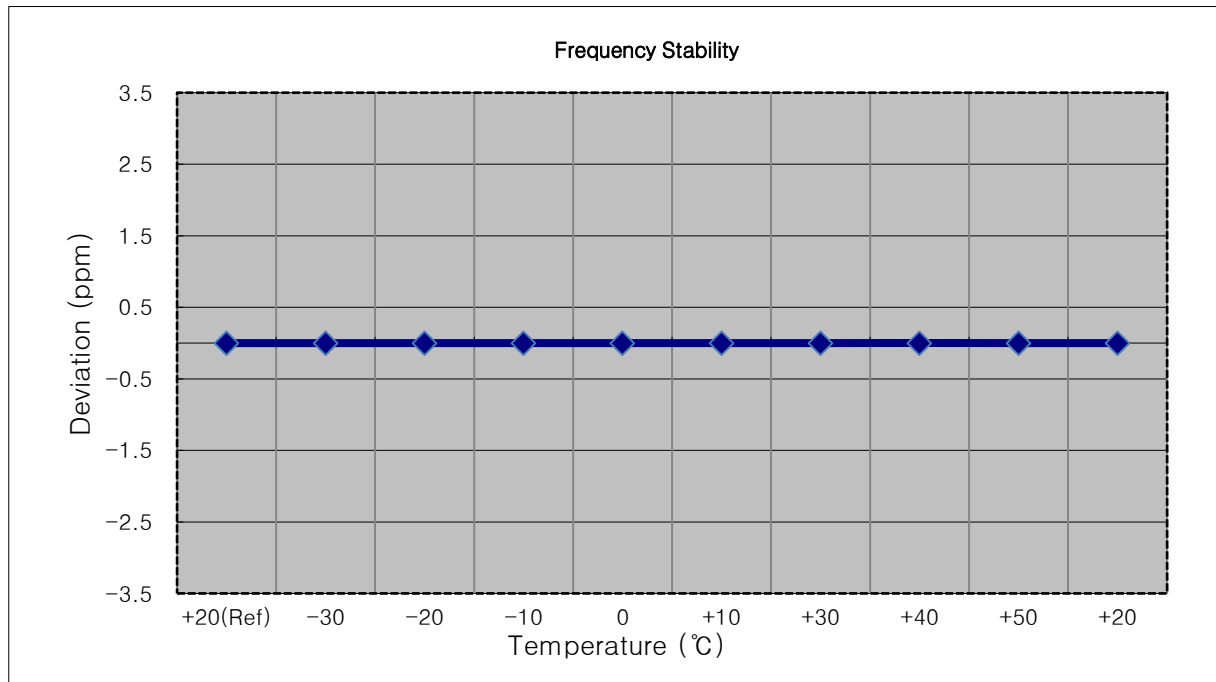


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 18700 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1860 000 002	0.0	0.000 000	0.000
100 %		-30	1860 000 001	-1.6	0.000 000	-0.001
100 %		-20	1860 000 003	1.1	0.000 000	0.001
100 %		-10	1860 000 004	1.6	0.000 000	0.001
100 %		0	1860 000 004	1.5	0.000 000	0.001
100 %		+10	1860 000 004	1.2	0.000 000	0.001
100 %		+30	1860 000 004	1.8	0.000 000	0.001
100 %		+40	1860 000 003	1.0	0.000 000	0.001
100 %		+50	1860 000 004	1.9	0.000 000	0.001
Batt. Endpoint		3.400	+20	1860 000 003	0.9	0.000 000

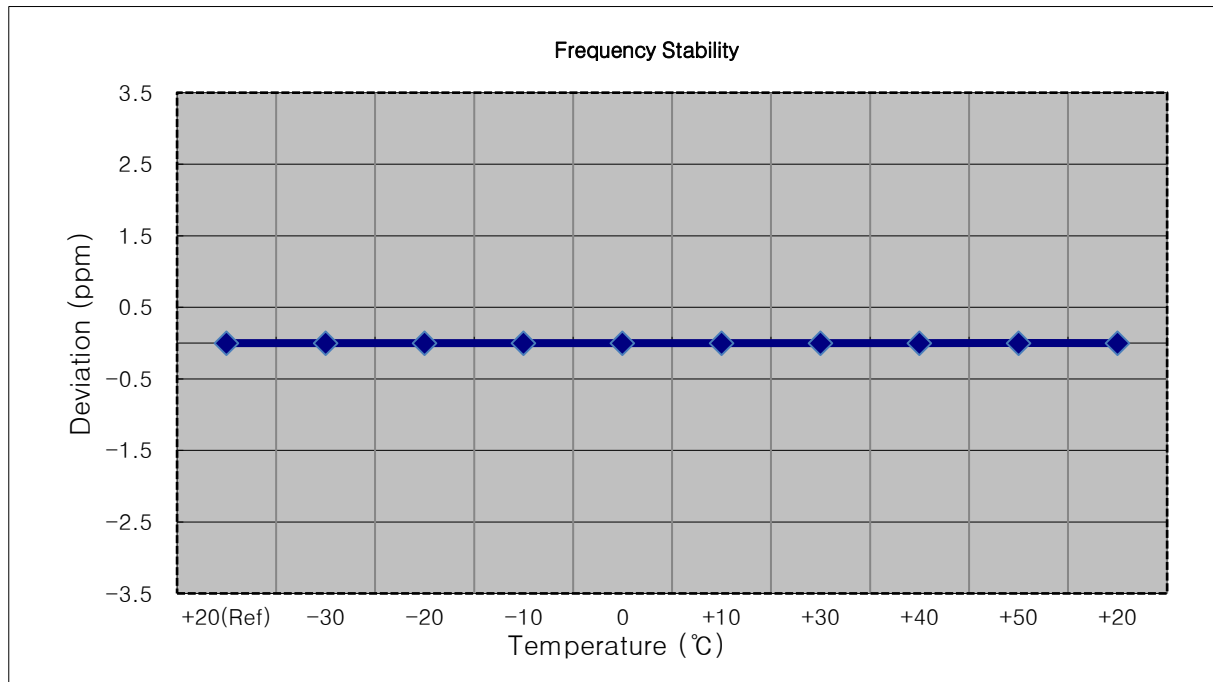


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1879 999 997	0.0	0.000 000	0.000
100 %		-30	1879 999 999	2.2	0.000 000	0.001
100 %		-20	1879 999 995	-1.7	0.000 000	-0.001
100 %		-10	1879 999 995	-2.1	0.000 000	-0.001
100 %		0	1880 000 000	3.2	0.000 000	0.002
100 %		+10	1879 999 999	2.4	0.000 000	0.001
100 %		+30	1879 999 999	1.8	0.000 000	0.001
100 %		+40	1879 999 995	-2.0	0.000 000	-0.001
100 %		+50	1879 999 999	2.2	0.000 000	0.001
Batt. Endpoint		3.400	+20	1879 999 999	1.8	0.000 000

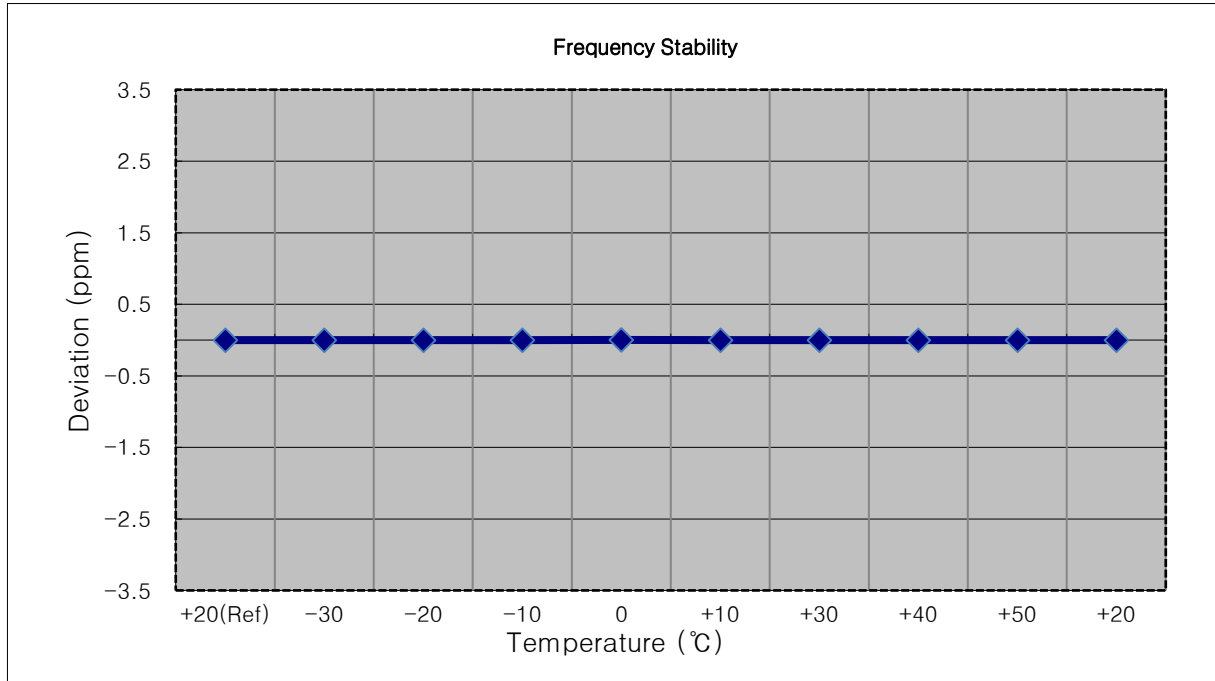


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1879 999 998	0.0	0.000 000	0.000
100 %		-30	1879 999 997	-1.6	0.000 000	-0.001
100 %		-20	1880 000 001	2.8	0.000 000	0.001
100 %		-10	1880 000 001	2.7	0.000 000	0.001
100 %		0	1880 000 001	2.6	0.000 000	0.001
100 %		+10	1880 000 001	2.9	0.000 000	0.002
100 %		+30	1880 000 000	1.6	0.000 000	0.001
100 %		+40	1880 000 000	1.3	0.000 000	0.001
100 %		+50	1879 999 996	-2.1	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1879 999 996	-2.5	0.000 000

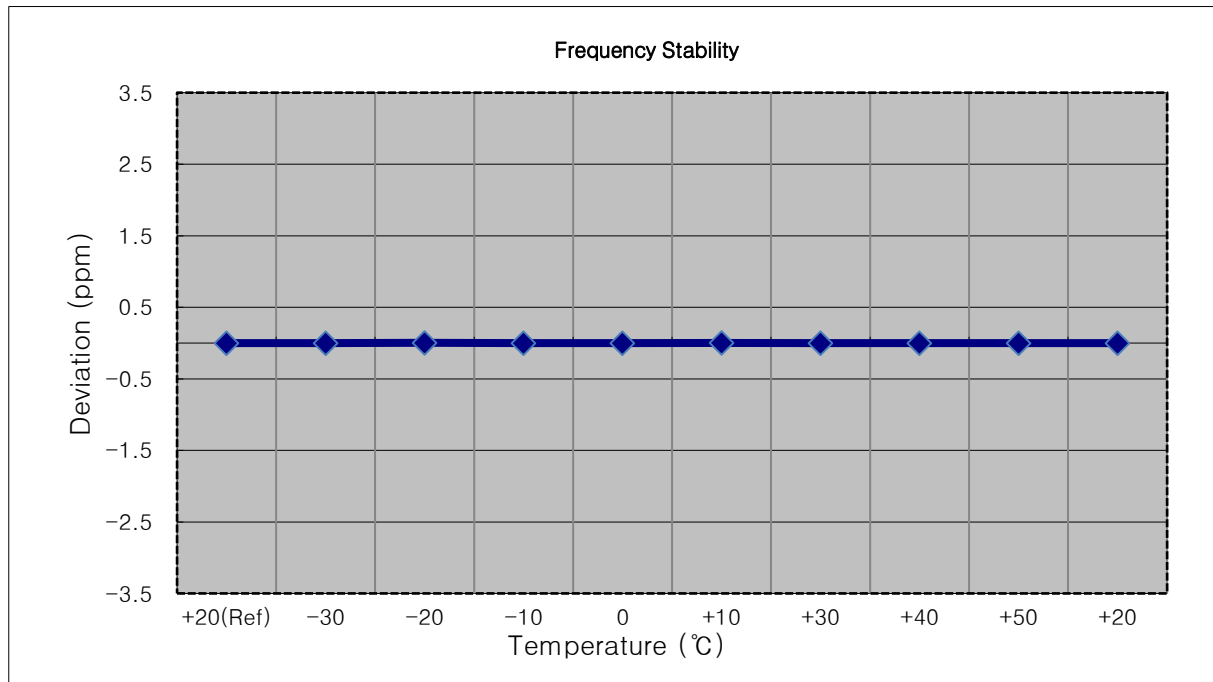


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1880 000 003	0.0	0.000 000	0.000
100 %		-30	1880 000 001	-1.9	0.000 000	-0.001
100 %		-20	1880 000 000	-3.0	0.000 000	-0.002
100 %		-10	1880 000 001	-2.0	0.000 000	-0.001
100 %		0	1880 000 006	3.0	0.000 000	0.002
100 %		+10	1880 000 000	-3.5	0.000 000	-0.002
100 %		+30	1880 000 006	2.6	0.000 000	0.001
100 %		+40	1880 000 005	2.2	0.000 000	0.001
100 %		+50	1880 000 000	-2.8	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1880 000 001	-2.6	0.000 000	-0.001

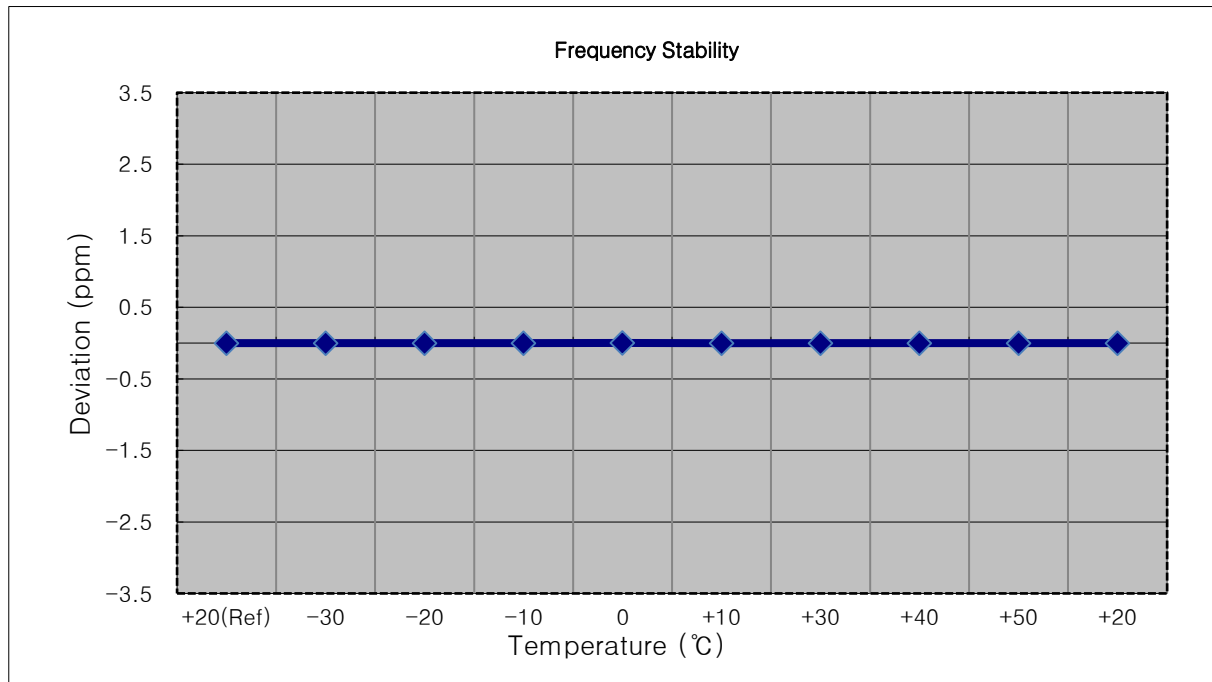


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1879 999 998	0.0	0.000 000	0.000
100 %		-30	1880 000 000	1.8	0.000 000	0.001
100 %		-20	1879 999 996	-1.9	0.000 000	-0.001
100 %		-10	1879 999 995	-2.7	0.000 000	-0.001
100 %		0	1879 999 999	1.6	0.000 000	0.001
100 %		+10	1880 000 000	2.1	0.000 000	0.001
100 %		+30	1879 999 996	-2.1	0.000 000	-0.001
100 %		+40	1879 999 996	-1.7	0.000 000	-0.001
100 %		+50	1879 999 996	-1.7	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1880 000 000	2.0	0.000 000	0.001

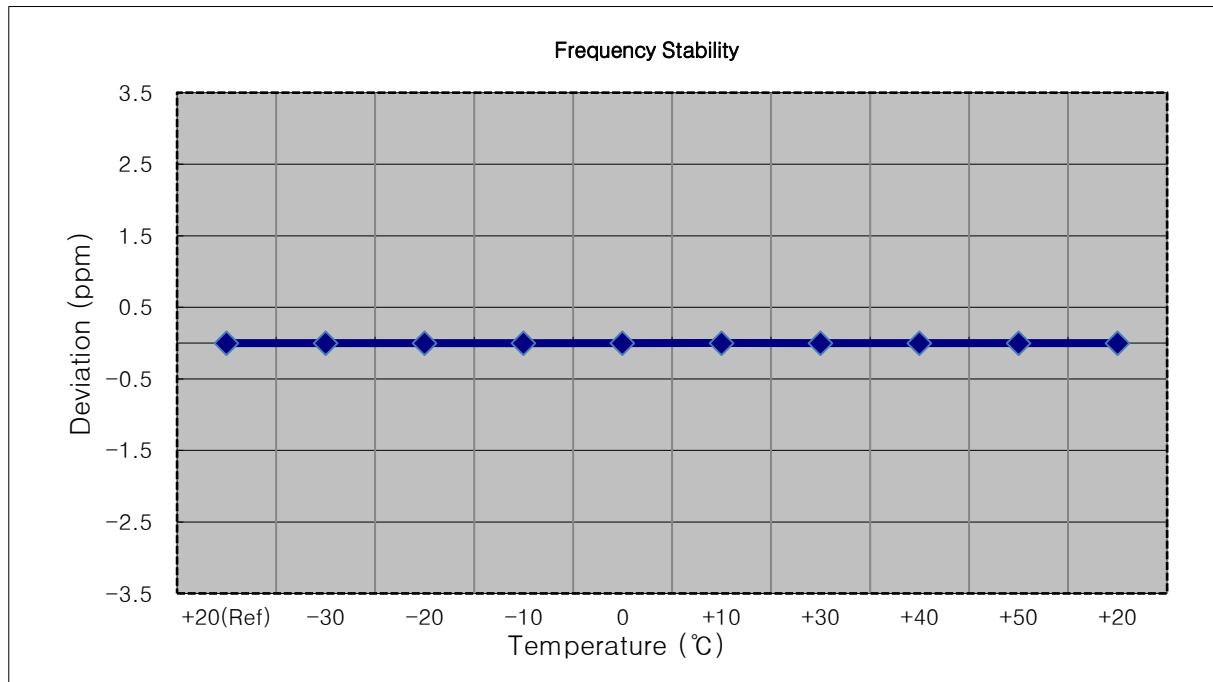


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1879 999 999	0.0	0.000 000	0.000
100 %		-30	1879 999 997	-1.6	0.000 000	-0.001
100 %		-20	1879 999 997	-1.5	0.000 000	-0.001
100 %		-10	1879 999 997	-1.8	0.000 000	-0.001
100 %		0	1879 999 997	-2.0	0.000 000	-0.001
100 %		+10	1879 999 996	-2.6	0.000 000	-0.001
100 %		+30	1879 999 997	-2.2	0.000 000	-0.001
100 %		+40	1879 999 997	-1.8	0.000 000	-0.001
100 %		+50	1879 999 997	-1.9	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1880 000 001	2.0	0.000 000	0.001

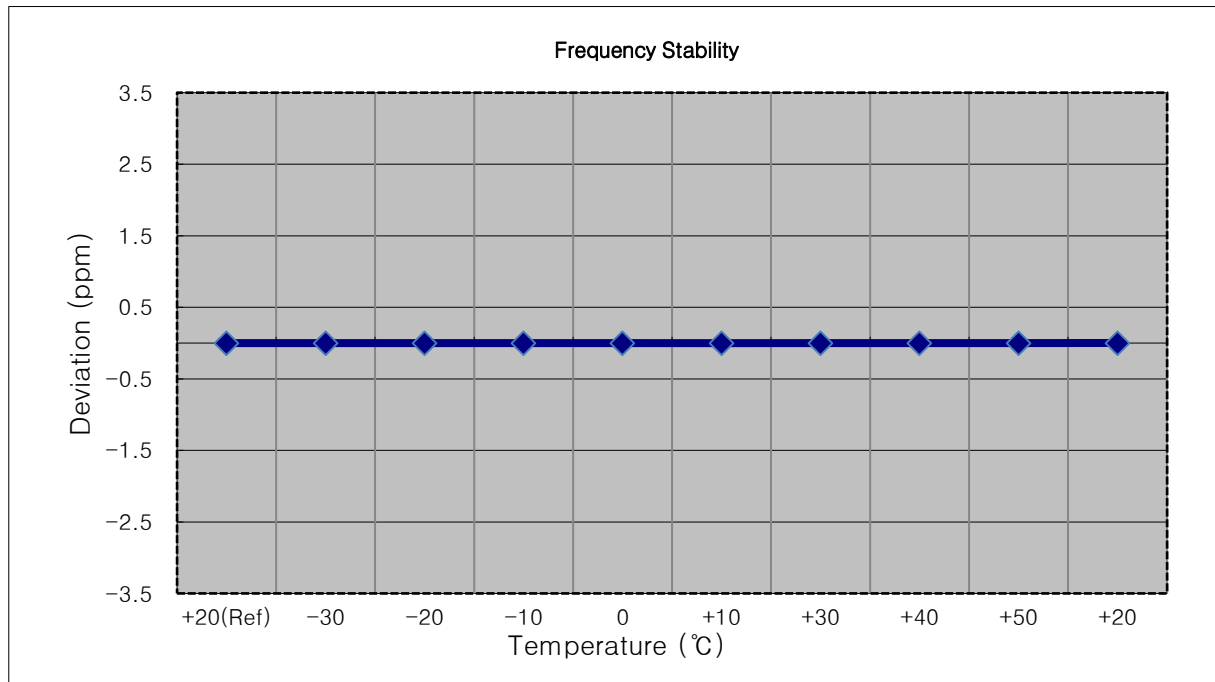


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1879 999 998	0.0	0.000 000	0.000
100 %		-30	1879 999 997	-1.8	0.000 000	-0.001
100 %		-20	1879 999 997	-1.3	0.000 000	-0.001
100 %		-10	1879 999 997	-1.7	0.000 000	-0.001
100 %		0	1880 000 000	1.3	0.000 000	0.001
100 %		+10	1879 999 997	-1.8	0.000 000	-0.001
100 %		+30	1879 999 996	-2.5	0.000 000	-0.001
100 %		+40	1879 999 997	-1.7	0.000 000	-0.001
100 %		+50	1879 999 997	-1.8	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1879 999 997	-1.1	0.000 000	-0.001

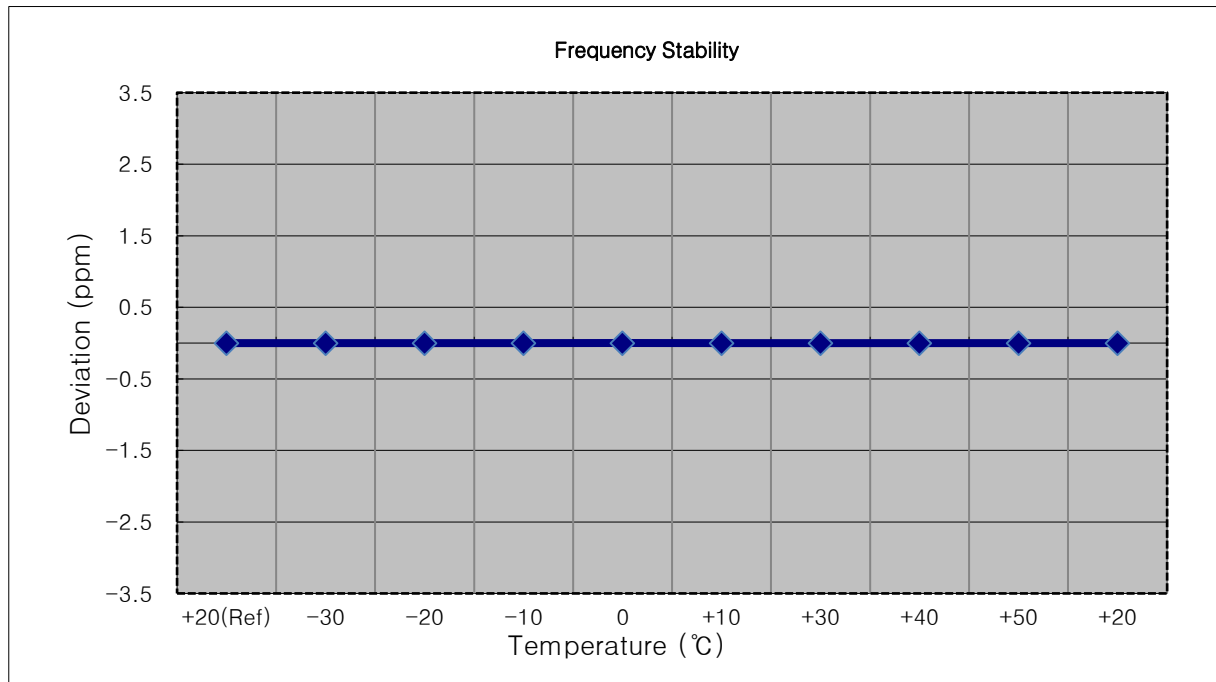


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1909,300,000 Hz
- ▣ CHANNEL: 19193 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1909 299 998	0.0	0.000 000	0.000
100 %		-30	1909 299 995	-3.2	0.000 000	-0.002
100 %		-20	1909 300 002	4.3	0.000 000	0.002
100 %		-10	1909 300 002	4.6	0.000 000	0.002
100 %		0	1909 299 995	-2.8	0.000 000	-0.001
100 %		+10	1909 300 001	3.2	0.000 000	0.002
100 %		+30	1909 299 995	-2.7	0.000 000	-0.001
100 %		+40	1909 300 001	3.2	0.000 000	0.002
100 %		+50	1909 299 995	-2.4	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1909 299 996	-1.6	0.000 000	-0.001

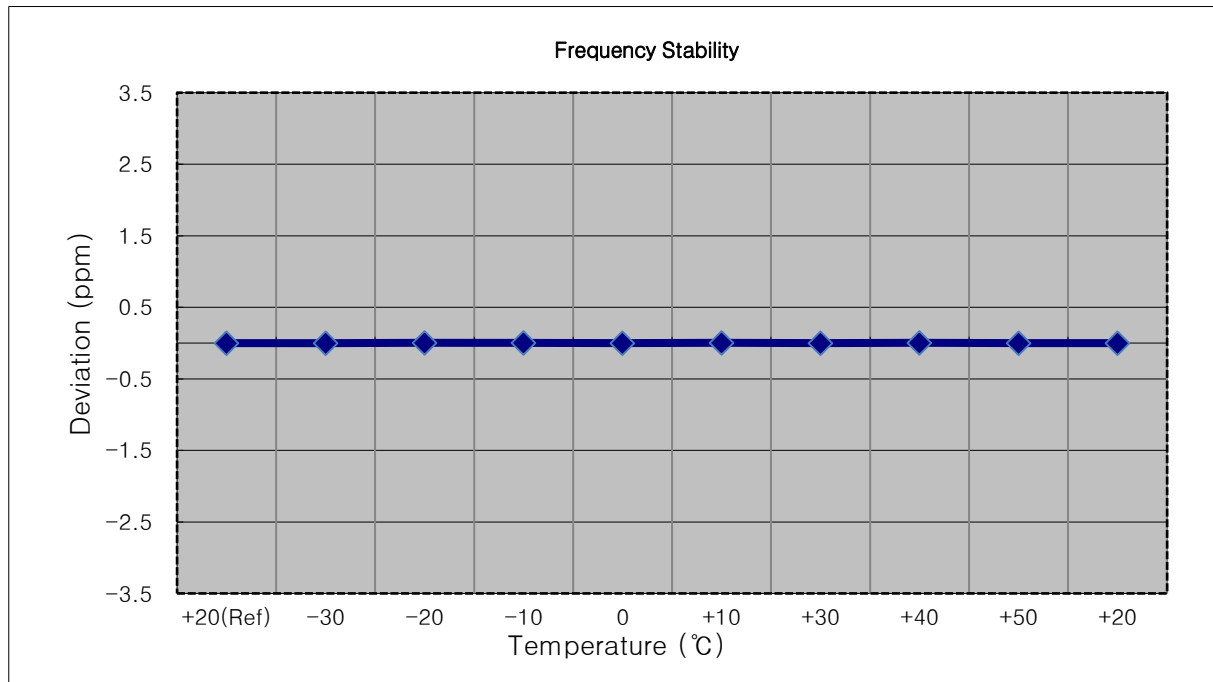


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1908,500,000 Hz
- ▣ CHANNEL: 19185 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1908 499 993	0.0	0.000 000	0.000
100 %		-30	1908 499 988	-5.3	0.000 000	-0.003
100 %		-20	1908 499 987	-6.0	0.000 000	-0.003
100 %		-10	1908 499 987	-6.0	0.000 000	-0.003
100 %		0	1908 499 986	-7.1	0.000 000	-0.004
100 %		+10	1908 499 986	-6.9	0.000 000	-0.004
100 %		+30	1908 499 986	-6.6	0.000 000	-0.003
100 %		+40	1908 499 988	-4.5	0.000 000	-0.002
100 %		+50	1908 499 986	-6.4	0.000 000	-0.003
Batt. Endpoint		3.400	+20	1908 499 988	-4.9	0.000 000

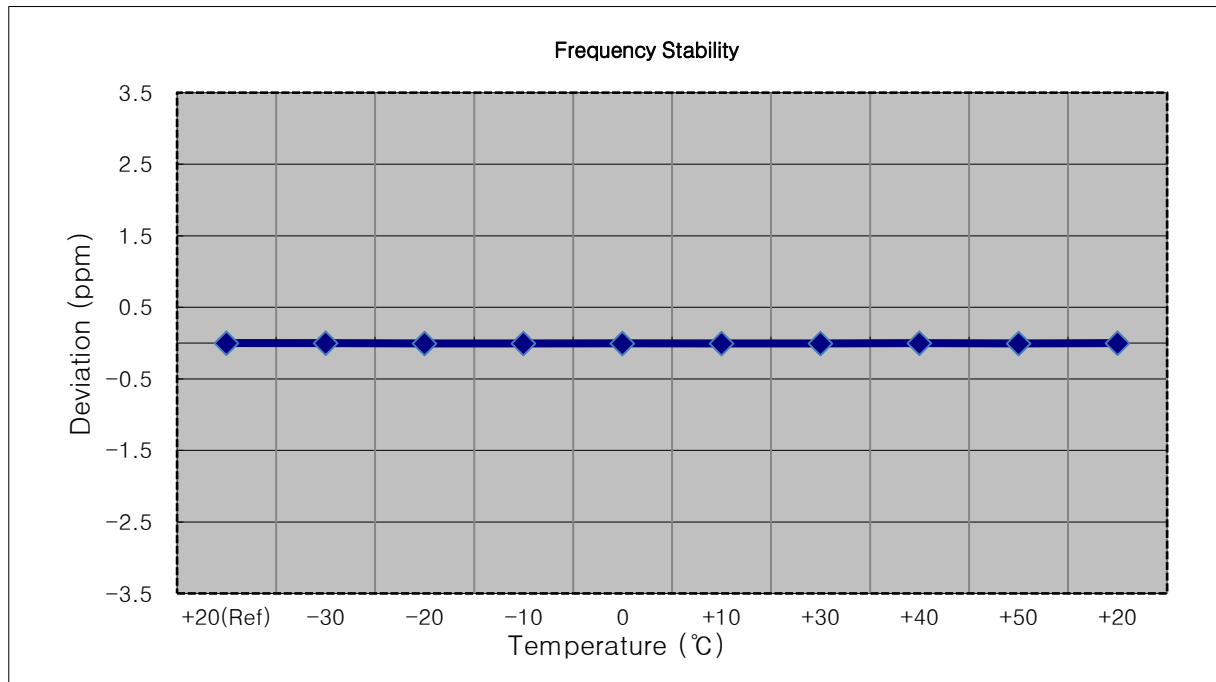


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1907,500,000 Hz
- ▣ CHANNEL: 19175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1907 499 998	0.0	0.000 000	0.000
100 %		-30	1907 499 996	-1.6	0.000 000	-0.001
100 %		-20	1907 499 994	-3.6	0.000 000	-0.002
100 %		-10	1907 499 994	-3.6	0.000 000	-0.002
100 %		0	1907 499 995	-2.4	0.000 000	-0.001
100 %		+10	1907 499 995	-2.2	0.000 000	-0.001
100 %		+30	1907 499 995	-2.2	0.000 000	-0.001
100 %		+40	1907 499 995	-2.3	0.000 000	-0.001
100 %		+50	1907 499 995	-2.6	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1907 499 995	-2.4	0.000 000	-0.001

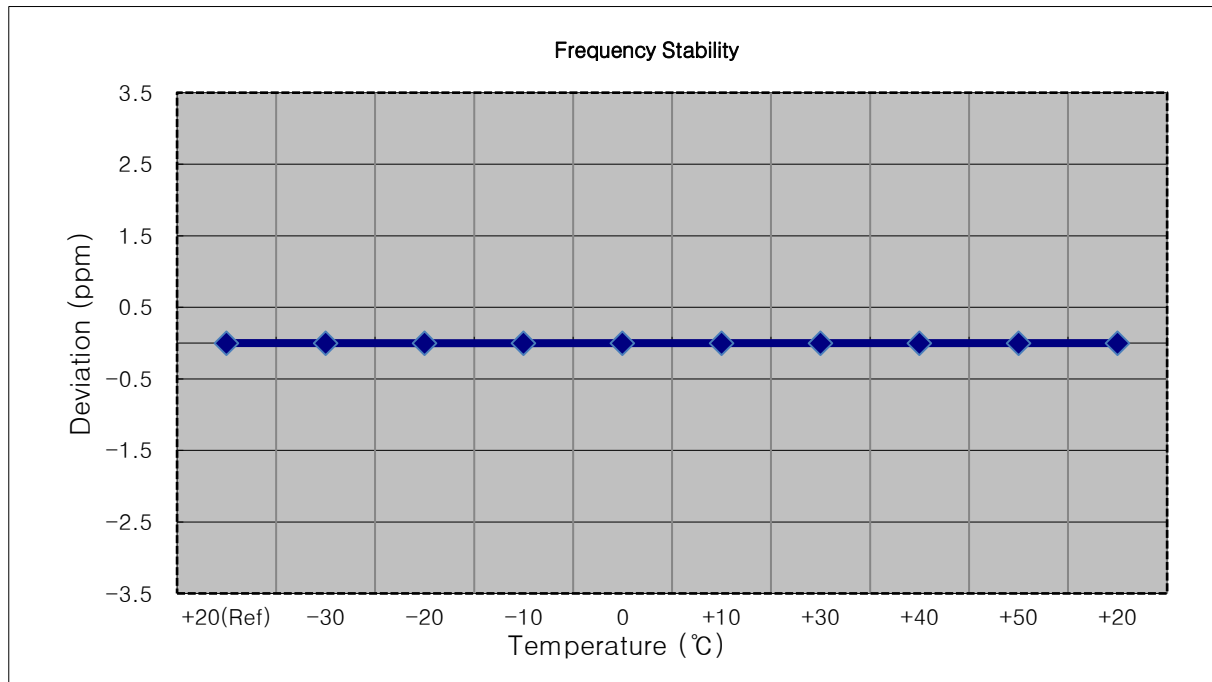


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1905,000,000 Hz
- ▣ CHANNEL: 19150 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1905 000 002	0.0	0.000 000	0.000
100 %		-30	1905 000 004	2.2	0.000 000	0.001
100 %		-20	1904 999 999	-2.7	0.000 000	-0.001
100 %		-10	1905 000 004	1.7	0.000 000	0.001
100 %		0	1905 000 004	2.3	0.000 000	0.001
100 %		+10	1905 000 004	2.4	0.000 000	0.001
100 %		+30	1905 000 004	2.3	0.000 000	0.001
100 %		+40	1905 000 000	-1.8	0.000 000	-0.001
100 %		+50	1905 000 005	2.7	0.000 000	0.001
Batt. Endpoint	3.400	+20	1905 000 006	3.8	0.000 000	0.002

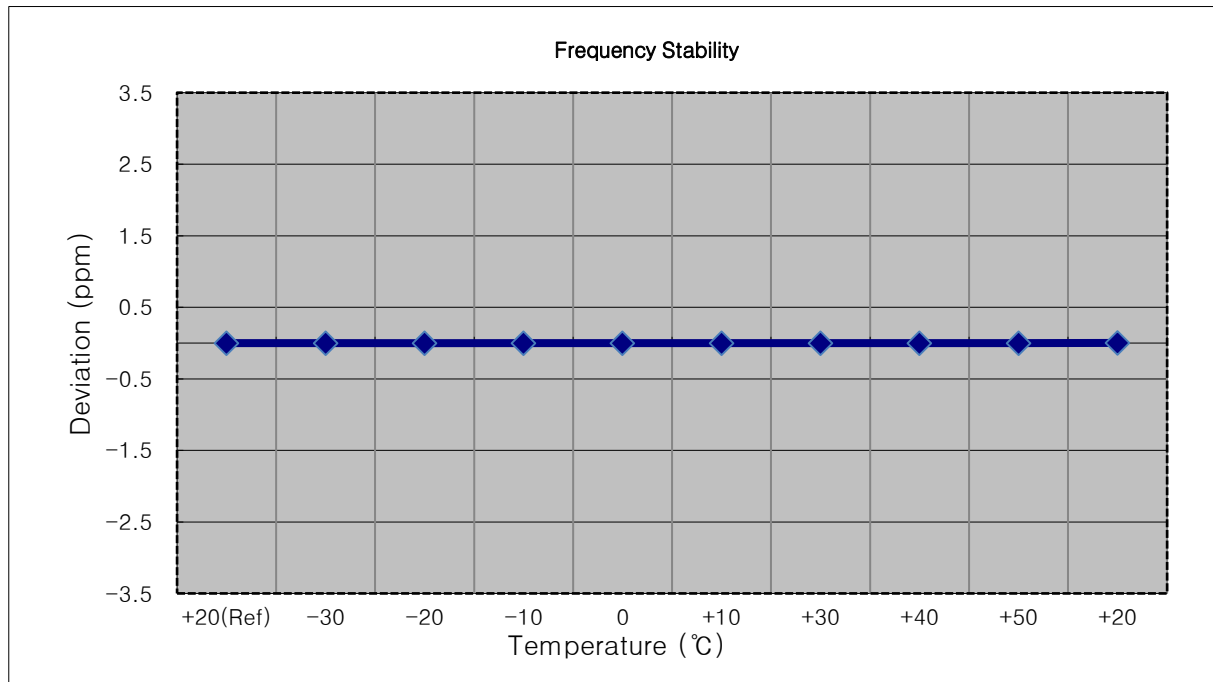


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1902,500,000 Hz
- ▣ CHANNEL: 19125 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1902 499 998	0.0	0.000 000	0.000
100 %		-30	1902 499 996	-2.2	0.000 000	-0.001
100 %		-20	1902 499 995	-2.5	0.000 000	-0.001
100 %		-10	1902 500 000	1.9	0.000 000	0.001
100 %		0	1902 499 997	-1.3	0.000 000	-0.001
100 %		+10	1902 499 996	-2.3	0.000 000	-0.001
100 %		+30	1902 499 996	-2.1	0.000 000	-0.001
100 %		+40	1902 499 996	-1.4	0.000 000	-0.001
100 %		+50	1902 499 995	-2.5	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1902 500 000	1.8	0.000 000	0.001

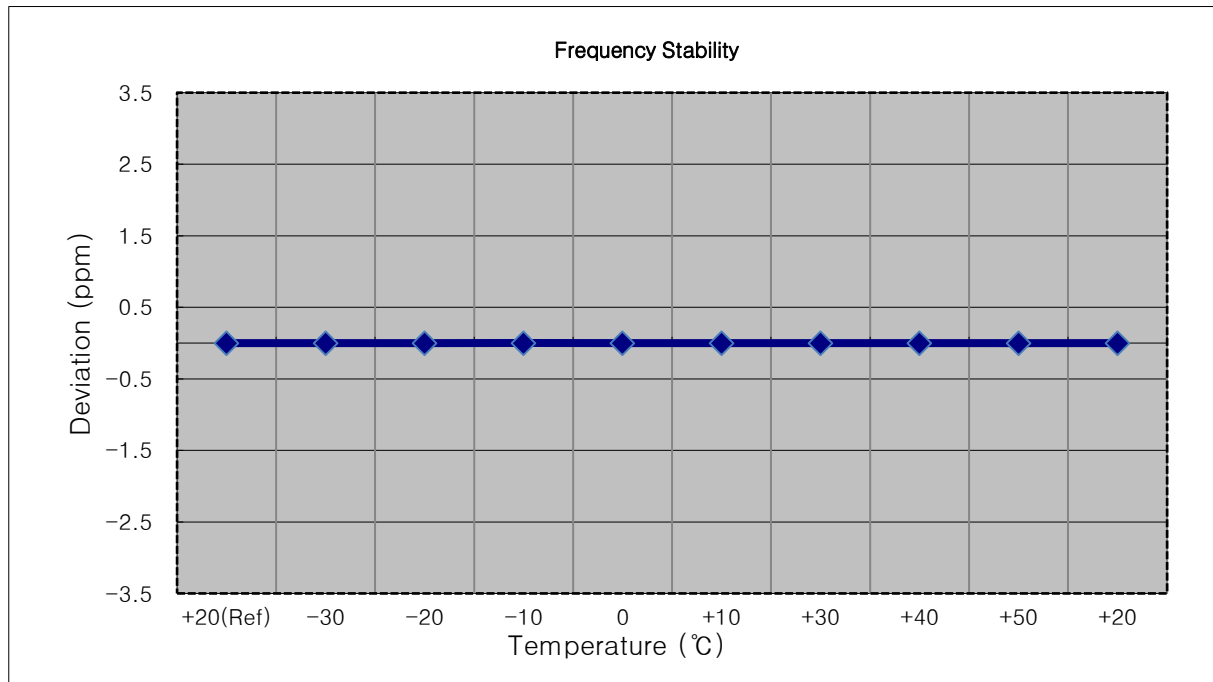

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1900,000,000 Hz
- ▣ CHANNEL: 19100 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1899 999 998	0.0	0.000 000	0.000
100 %		-30	1900 000 001	3.4	0.000 000	0.002
100 %		-20	1900 000 000	1.7	0.000 000	0.001
100 %		-10	1900 000 000	1.8	0.000 000	0.001
100 %		0	1899 999 996	-2.3	0.000 000	-0.001
100 %		+10	1899 999 995	-2.9	0.000 000	-0.002
100 %		+30	1900 000 000	1.8	0.000 000	0.001
100 %		+40	1899 999 996	-2.1	0.000 000	-0.001
100 %		+50	1899 999 995	-2.5	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1900 000 000	1.9	0.000 000

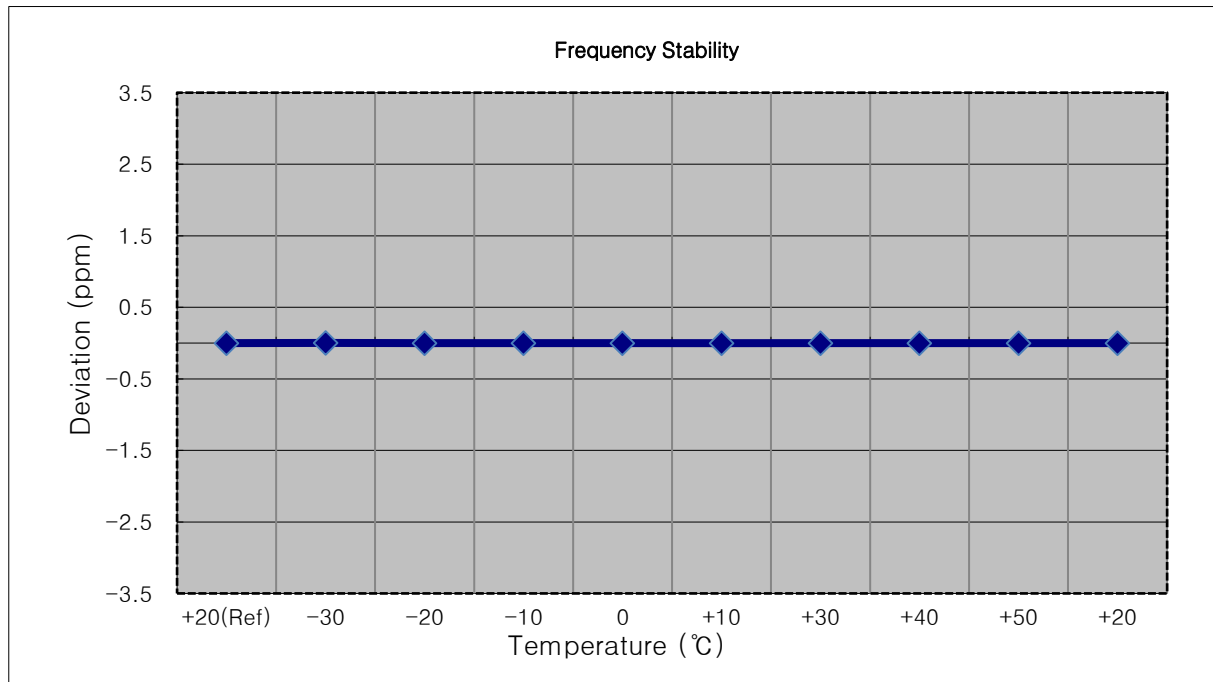

9. TEST DATA (Main 3 Ant)

9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1850.7	LTE B2/ 1.4 MHz	QPSK	-20.50	13.32	10.00	2.12	H	< 2.00	0.132	21.20
		16-QAM	-21.34	12.48	10.00	2.12	H		0.109	20.36
		64-QAM	-22.29	11.53	10.00	2.12	H		0.087	19.41
		256-QAM	-25.28	8.54	10.00	2.12	H		0.044	16.42
1880.0		QPSK	-19.77	13.83	10.00	2.21	H		0.145	21.62
		16-QAM	-20.73	12.87	10.00	2.21	H		0.116	20.66
		64-QAM	-21.68	11.92	10.00	2.21	H		0.094	19.71
		256-QAM	-24.54	9.06	10.00	2.21	H		0.048	16.85
1909.3		QPSK	-20.58	13.44	10.01	2.11	H		0.136	21.34
		16-QAM	-21.61	12.41	10.01	2.11	H		0.107	20.31
		64-QAM	-22.55	11.47	10.01	2.11	H		0.087	19.37
		256-QAM	-25.32	8.70	10.01	2.11	H		0.046	16.60

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1851.5	LTE B2/ 3 MHz	QPSK	-20.36	13.46	10.00	2.12	H	< 2.00	0.136	21.34
		16-QAM	-21.19	12.63	10.00	2.12	H		0.112	20.51
		64-QAM	-22.24	11.58	10.00	2.12	H		0.088	19.46
		256-QAM	-25.15	8.67	10.00	2.12	H		0.045	16.55
1880.0		QPSK	-19.91	13.69	10.00	2.21	H		0.141	21.48
		16-QAM	-20.90	12.70	10.00	2.21	H		0.112	20.49
		64-QAM	-21.65	11.95	10.00	2.21	H		0.094	19.74
		256-QAM	-24.67	8.93	10.00	2.21	H		0.047	16.72
1908.5		QPSK	-20.87	13.15	10.01	2.11	H		0.128	21.05
		16-QAM	-21.85	12.17	10.01	2.11	H		0.102	20.07
		64-QAM	-22.84	11.18	10.01	2.11	H		0.081	19.08
		256-QAM	-25.61	8.41	10.01	2.11	H		0.043	16.31

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1852.5	LTE B2/ 5 MHz	QPSK	-20.41	13.41	10.00	2.12	H	< 2.00	0.135	21.29	
		16-QAM	-21.26	12.56	10.00	2.12	H		0.111	20.44	
		64-QAM	-22.20	11.62	10.00	2.12	H		0.089	19.50	
		256-QAM	-25.22	8.60	10.00	2.12	H		0.045	16.48	
1880.0		QPSK	-19.92	13.68	10.00	2.21	H		0.140	21.47	
		16-QAM	-20.89	12.71	10.00	2.21	H		0.112	20.50	
		64-QAM	-21.85	11.75	10.00	2.21	H		0.090	19.54	
		256-QAM	-24.68	8.92	10.00	2.21	H		0.047	16.71	
1907.5		QPSK	-20.84	13.18	10.01	2.11	H		0.128	21.08	
		16-QAM	-21.85	12.17	10.01	2.11	H		0.102	20.07	
		64-QAM	-22.80	11.22	10.01	2.11	H		0.082	19.12	
		256-QAM	-25.58	8.44	10.01	2.11	H		0.043	16.34	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1855.0	LTE B2/ 10 MHz	QPSK	-20.33	13.26	10.00	2.15	H	< 2.00	0.129	21.11	
		16-QAM	-21.20	12.39	10.00	2.15	H		0.106	20.24	
		64-QAM	-22.19	11.40	10.00	2.15	H		0.084	19.25	
		256-QAM	-25.14	8.45	10.00	2.15	H		0.043	16.30	
1880.0		QPSK	-19.82	13.78	10.00	2.21	H		0.144	21.57	
		16-QAM	-20.73	12.87	10.00	2.21	H		0.116	20.66	
		64-QAM	-21.69	11.91	10.00	2.21	H		0.093	19.70	
		256-QAM	-24.60	9.00	10.00	2.21	H		0.048	16.79	
1905.0		QPSK	-20.44	13.53	10.01	2.13	H		0.138	21.41	
		16-QAM	-21.44	12.53	10.01	2.13	H		0.110	20.41	
		64-QAM	-22.44	11.53	10.01	2.13	H		0.087	19.41	
		256-QAM	-25.20	8.77	10.01	2.13	H		0.046	16.65	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1857.5	LTE B2/ 15 MHz	QPSK	-20.31	13.03	10.00	2.17	H	< 2.00	0.122	20.86	
		16-QAM	-21.15	12.19	10.00	2.17	H		0.101	20.02	
		64-QAM	-22.16	11.18	10.00	2.17	H		0.080	19.01	
		256-QAM	-25.11	8.23	10.00	2.17	H		0.040	16.06	
1880.0		QPSK	-19.73	13.87	10.00	2.21	H		0.147	21.66	
		16-QAM	-20.61	12.99	10.00	2.21	H		0.120	20.78	
		64-QAM	-21.56	12.04	10.00	2.21	H		0.096	19.83	
		256-QAM	-24.49	9.11	10.00	2.21	H		0.049	16.90	
1902.5		QPSK	-20.36	13.55	10.01	2.15	H		0.138	21.41	
		16-QAM	-21.23	12.68	10.01	2.15	H		0.113	20.54	
		64-QAM	-22.22	11.69	10.01	2.15	H		0.090	19.55	
		256-QAM	-25.14	8.77	10.01	2.15	H		0.046	16.63	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1860.0	LTE B2/ 20 MHz	QPSK	-20.18	13.16	10.00	2.17	H	< 2.00	0.126	20.99	
		16-QAM	-21.05	12.29	10.00	2.17	H		0.103	20.12	
		64-QAM	-22.03	11.31	10.00	2.17	H		0.082	19.14	
		256-QAM	-24.96	8.38	10.00	2.17	H		0.042	16.21	
1880.0		QPSK	-19.79	13.81	10.00	2.21	H		0.145	21.60	
		16-QAM	-20.59	13.01	10.00	2.21	H		0.120	20.80	
		64-QAM	-21.60	12.00	10.00	2.21	H		0.095	19.79	
		256-QAM	-24.60	9.00	10.00	2.21	H		0.048	16.79	
1900.0		QPSK	-20.18	13.73	10.01	2.15	H		0.144	21.59	
		16-QAM	-20.98	12.93	10.01	2.15	H		0.120	20.79	
		64-QAM	-21.97	11.94	10.01	2.15	H		0.095	19.80	
		256-QAM	-25.01	8.90	10.01	2.15	H		0.047	16.76	

9.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 1880.0 MHz
- ▣ MEASURED OUTPUT POWER: 21.66 dBm = 0.147 W
- ▣ MODE: LTE B2
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 34.66 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18675 (1857.5)	3,715.00	-58.73	11.40	-59.11	3.12	H	-50.83	72.49
	5,572.50	-53.05	11.90	-47.20	3.86	H	-39.16	60.82
	7,430.00	-64.45	10.80	-49.61	4.46	H	-43.27	64.93
	9,287.50	-61.58	10.80	-46.50	5.00	H	-40.70	62.36
	11,145.00	-63.18	11.40	-44.77	5.60	H	-38.97	60.63
18900 (1880.0)	3,760.00	-61.18	11.30	-61.31	3.07	V	-53.08	74.74
	5,640.00	-53.60	11.90	-48.00	3.89	H	-39.99	61.65
	7,520.00	-63.30	11.10	-49.07	4.51	V	-42.48	64.14
	9,400.00	-62.96	10.80	-47.68	5.07	V	-41.95	63.61
	11,280.00	-63.05	11.40	-43.75	5.62	V	-37.97	59.63
19125 (1902.5)	3,805.00	-60.96	11.10	-61.04	3.11	H	-53.05	74.71
	5,707.50	-54.37	11.70	-49.00	3.84	V	-41.14	62.80
	7,610.00	-63.65	11.20	-49.85	4.52	H	-43.17	64.83
	9,512.50	-61.72	10.90	-46.03	5.11	H	-40.24	61.90
	11,415.00	-64.22	11.40	-44.47	5.68	H	-38.75	60.41

9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	5.90
			16-QAM	6	0	6.65
			64-QAM	6	0	6.87
			256-QAM	6	0	6.97
	3 MHz		QPSK	15	0	5.96
			16-QAM	15	0	6.70
			64-QAM	15	0	6.85
			256-QAM	15	0	6.95
	5 MHz		QPSK	25	0	5.85
			16-QAM	25	0	6.64
			64-QAM	25	0	6.81
			256-QAM	25	0	6.97
	10 MHz		QPSK	50	0	5.88
			16-QAM	50	0	6.64
			64-QAM	50	0	6.83
			256-QAM	50	0	7.01
	15 MHz		QPSK	75	0	5.76
			16-QAM	75	0	6.59
			64-QAM	75	0	6.77
			256-QAM	75	0	6.93
20 MHz	QPSK	100	0	5.70		
	16-QAM	100	0	6.55		
	64-QAM	100	0	6.78		
	256-QAM	100	0	6.92		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 260 ~ 283.

9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.0938
			16-QAM	6	0	1.0957
			64-QAM	6	0	1.0923
			256-QAM	6	0	1.0954
	3 MHz		QPSK	15	0	2.7123
			16-QAM	15	0	2.7075
			64-QAM	15	0	2.7138
			256-QAM	15	0	2.7080
	5 MHz		QPSK	25	0	4.5338
			16-QAM	25	0	4.5212
			64-QAM	25	0	4.5266
			256-QAM	25	0	4.5413
	10 MHz		QPSK	50	0	9.0278
			16-QAM	50	0	9.0089
			64-QAM	50	0	9.0083
			256-QAM	50	0	9.0162
	15 MHz		QPSK	75	0	13.446
			16-QAM	75	0	13.454
			64-QAM	75	0	13.473
			256-QAM	75	0	13.456
20 MHz	QPSK	100	0	17.929		
	16-QAM	100	0	17.899		
	64-QAM	100	0	17.923		
	256-QAM	100	0	17.928		

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 236 ~ 259.

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	3.7005	30.200	-60.359	-30.159	-13.00
		1880.0	3.7593	30.200	-59.712	-29.512	
		1909.3	5.7264	30.815	-69.486	-38.671	
	3	1851.5	3.7005	30.200	-60.363	-30.163	
		1880.0	3.7573	30.200	-63.369	-33.169	
		1908.5	9.1077	30.815	-69.969	-39.154	
	5	1852.5	3.7005	30.200	-61.992	-31.792	
		1880.0	3.7558	30.200	-60.212	-30.012	
		1907.5	5.7289	30.815	-66.455	-35.640	
	10	1855.0	3.7010	30.200	-60.335	-30.135	
		1880.0	3.7513	30.200	-60.229	-30.029	
		1905.0	8.8495	30.815	-70.144	-39.329	
	15	1857.5	3.7015	30.200	-60.928	-30.728	
		1880.0	3.7468	30.200	-59.759	-29.559	
		1902.5	5.7274	30.815	-70.072	-39.257	
	20	1860.0	3.7020	30.200	-59.883	-29.683	
		1880.0	3.7423	30.200	-59.988	-29.788	
		1900.0	5.7269	30.815	-69.153	-38.338	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 284 ~ 319.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20	32.355


9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 200 ~ 235.

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 18607 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1850 699 999	0.0	0.000 000	0.000
100 %		-30	1850 699 999	0.2	0.000 000	0.000
100 %		-20	1850 699 999	0.4	0.000 000	0.000
100 %		-10	1850 699 998	-0.6	0.000 000	0.000
100 %		0	1850 700 000	0.7	0.000 000	0.000
100 %		+10	1850 699 999	0.4	0.000 000	0.000
100 %		+30	1850 699 998	-1.3	0.000 000	-0.001
100 %		+40	1850 699 999	0.2	0.000 000	0.000
100 %		+50	1850 700 000	0.6	0.000 000	0.000
Batt. Endpoint		3.400	+20	1850 699 999	-0.3	0.000 000

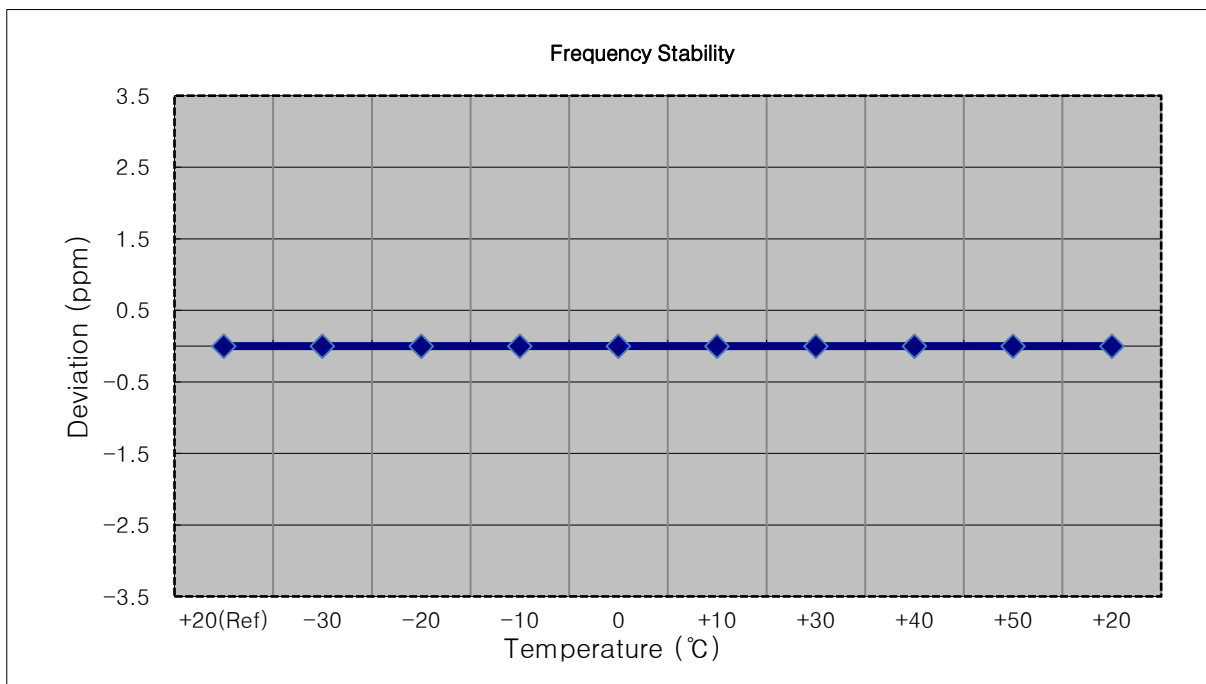


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 18615 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1851 500 000	0.0	0.000 000	0.000
100 %		-30	1851 500 000	0.1	0.000 000	0.000
100 %		-20	1851 500 000	0.7	0.000 000	0.000
100 %		-10	1851 499 999	-0.3	0.000 000	0.000
100 %		0	1851 500 000	0.8	0.000 000	0.000
100 %		+10	1851 500 000	0.7	0.000 000	0.000
100 %		+30	1851 499 998	-1.1	0.000 000	-0.001
100 %		+40	1851 500 000	0.1	0.000 000	0.000
100 %		+50	1851 500 001	0.9	0.000 000	0.000
Batt. Endpoint		3.400	+20	1851 499 999	-0.2	0.000 000

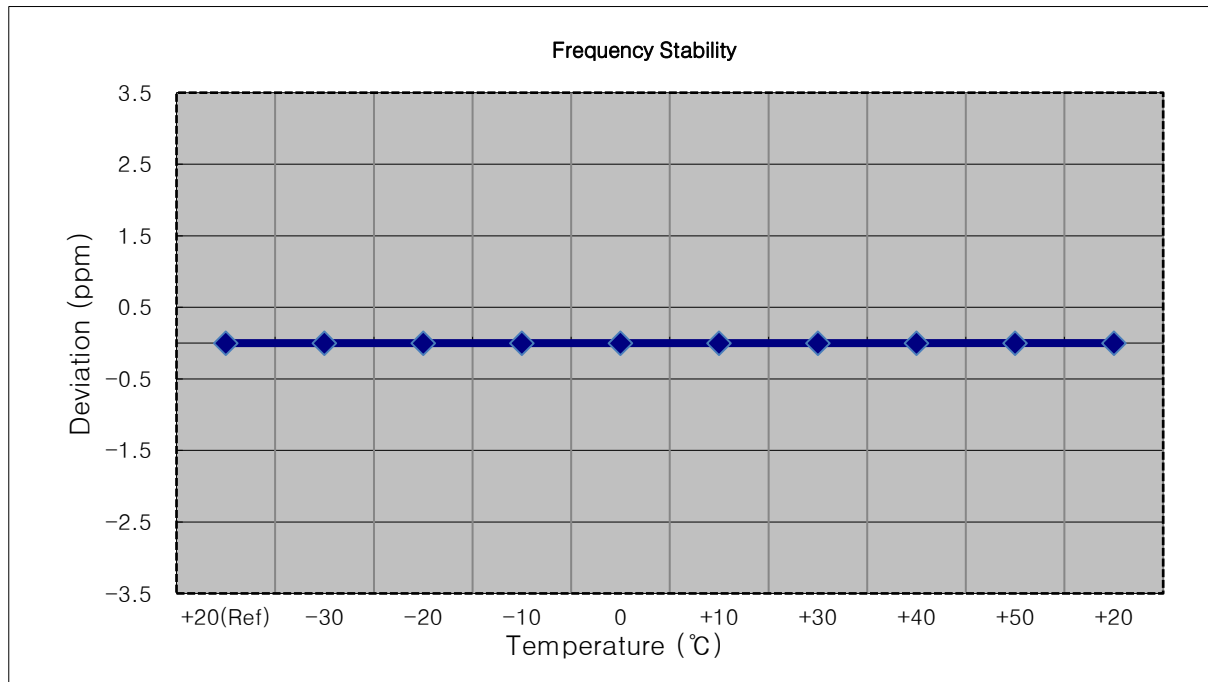


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1852,500,000 Hz
- ▣ CHANNEL: 18625 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1852 500 000	0.0	0.000 000	0.000
100 %		-30	1852 500 001	1.9	0.000 000	0.001
100 %		-20	1852 499 999	-0.4	0.000 000	0.000
100 %		-10	1852 500 001	1.9	0.000 000	0.001
100 %		0	1852 500 001	1.6	0.000 000	0.001
100 %		+10	1852 499 999	-0.2	0.000 000	0.000
100 %		+30	1852 499 999	-0.8	0.000 000	0.000
100 %		+40	1852 500 000	0.7	0.000 000	0.000
100 %		+50	1852 500 000	0.7	0.000 000	0.000
Batt. Endpoint	3.400	+20	1852 500 002	2.4	0.000 000	0.001

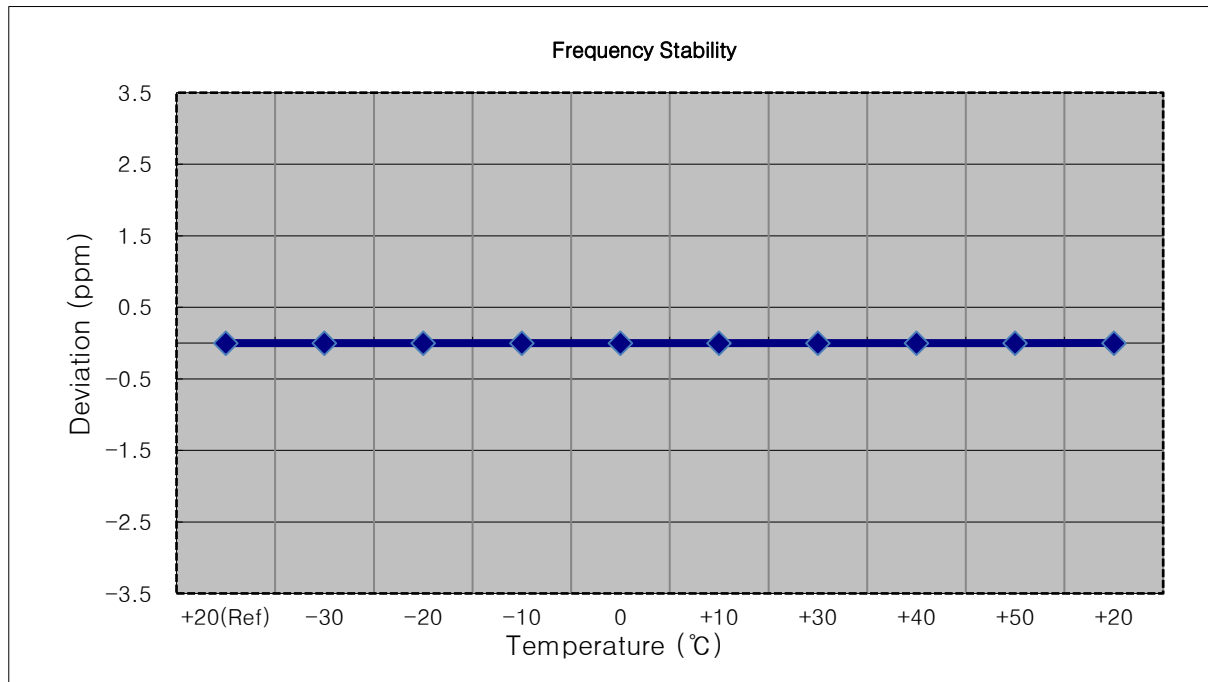


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1855,000,000 Hz
- ▣ CHANNEL: 18650 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1854 999 998	0.0	0.000 000	0.000
100 %		-30	1855 000 001	2.9	0.000 000	0.002
100 %		-20	1854 999 995	-3.3	0.000 000	-0.002
100 %		-10	1855 000 000	1.0	0.000 000	0.001
100 %		0	1854 999 999	0.1	0.000 000	0.000
100 %		+10	1854 999 998	-0.9	0.000 000	-0.001
100 %		+30	1854 999 999	0.6	0.000 000	0.000
100 %		+40	1854 999 998	-0.6	0.000 000	0.000
100 %		+50	1854 999 999	0.4	0.000 000	0.000
Batt. Endpoint	3.400	+20	1854 999 996	-2.1	0.000 000	-0.001

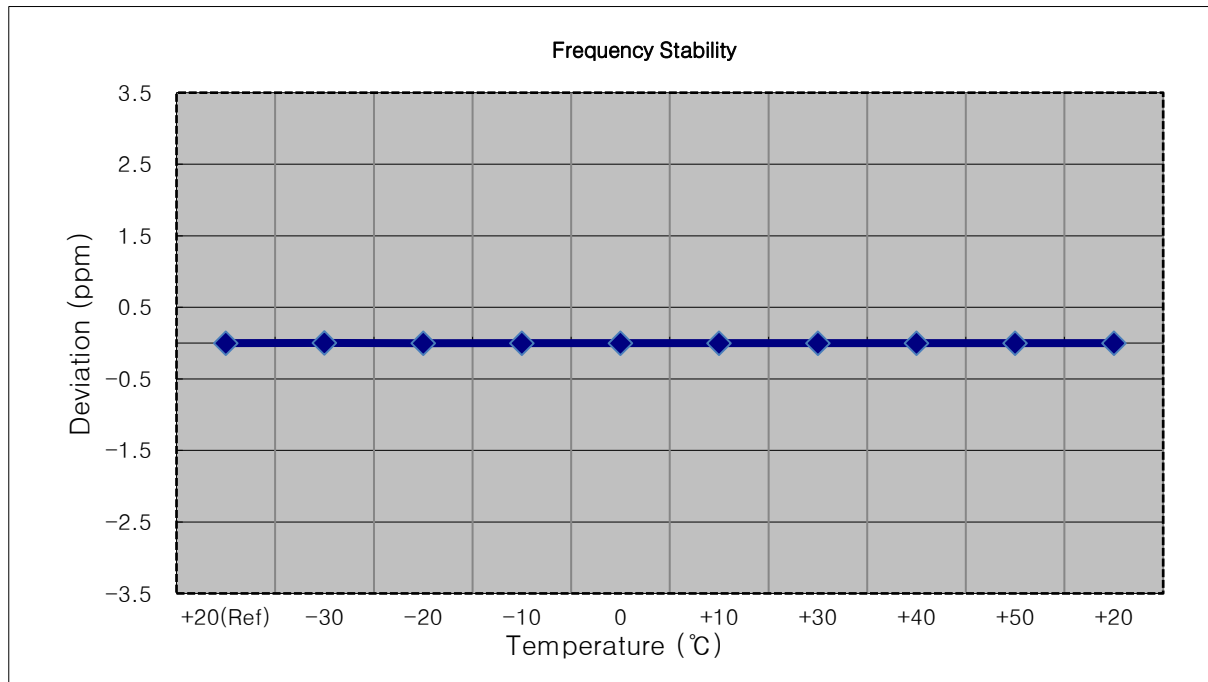


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1857,500,000 Hz
- ▣ CHANNEL: 18675 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1857 500 002	0.0	0.000 000	0.000
100 %		-30	1857 500 003	0.7	0.000 000	0.000
100 %		-20	1857 500 000	-1.5	0.000 000	-0.001
100 %		-10	1857 500 003	0.9	0.000 000	0.000
100 %		0	1857 500 002	0.0	0.000 000	0.000
100 %		+10	1857 500 002	-0.1	0.000 000	0.000
100 %		+30	1857 500 005	3.4	0.000 000	0.002
100 %		+40	1857 500 001	-1.2	0.000 000	-0.001
100 %		+50	1857 500 001	-1.2	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1857 500 000	-1.9	0.000 000

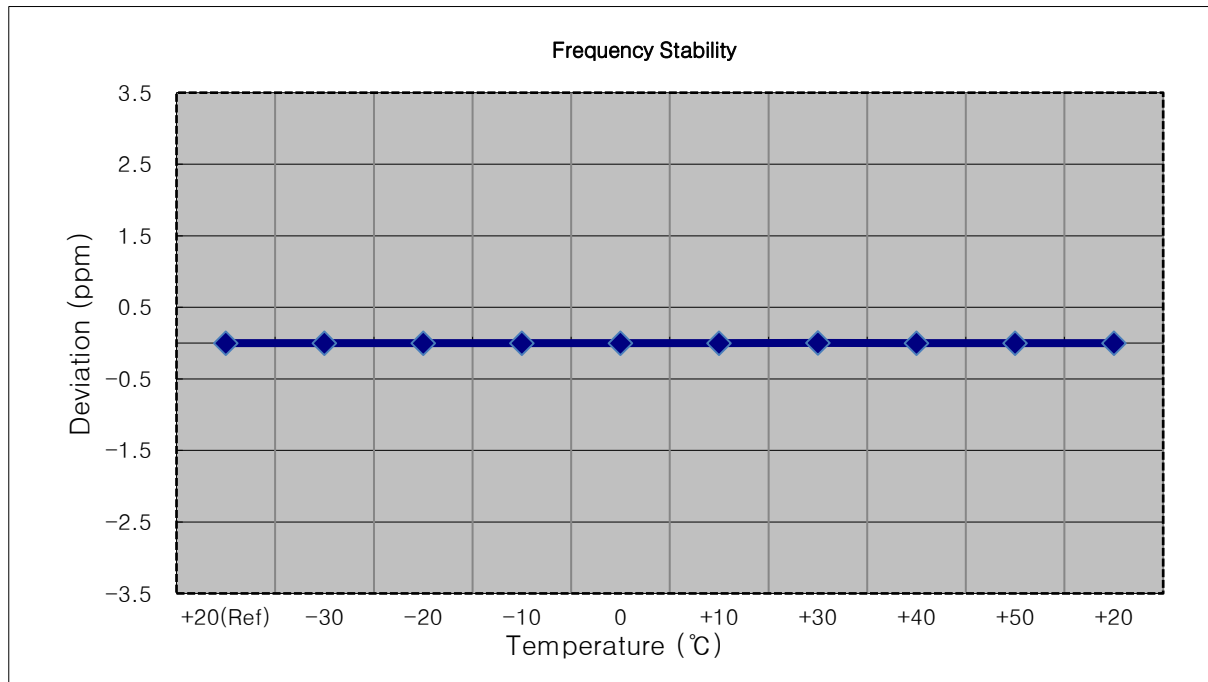


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 18700 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1860 000 000	0.0	0.000 000	0.000
100 %		-30	1860 000 002	2.1	0.000 000	0.001
100 %		-20	1860 000 000	0.0	0.000 000	0.000
100 %		-10	1860 000 001	0.9	0.000 000	0.000
100 %		0	1860 000 001	1.0	0.000 000	0.001
100 %		+10	1860 000 001	0.4	0.000 000	0.000
100 %		+30	1859 999 999	-1.4	0.000 000	-0.001
100 %		+40	1859 999 999	-1.3	0.000 000	-0.001
100 %		+50	1859 999 999	-1.4	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1859 999 998	-2.6	0.000 000

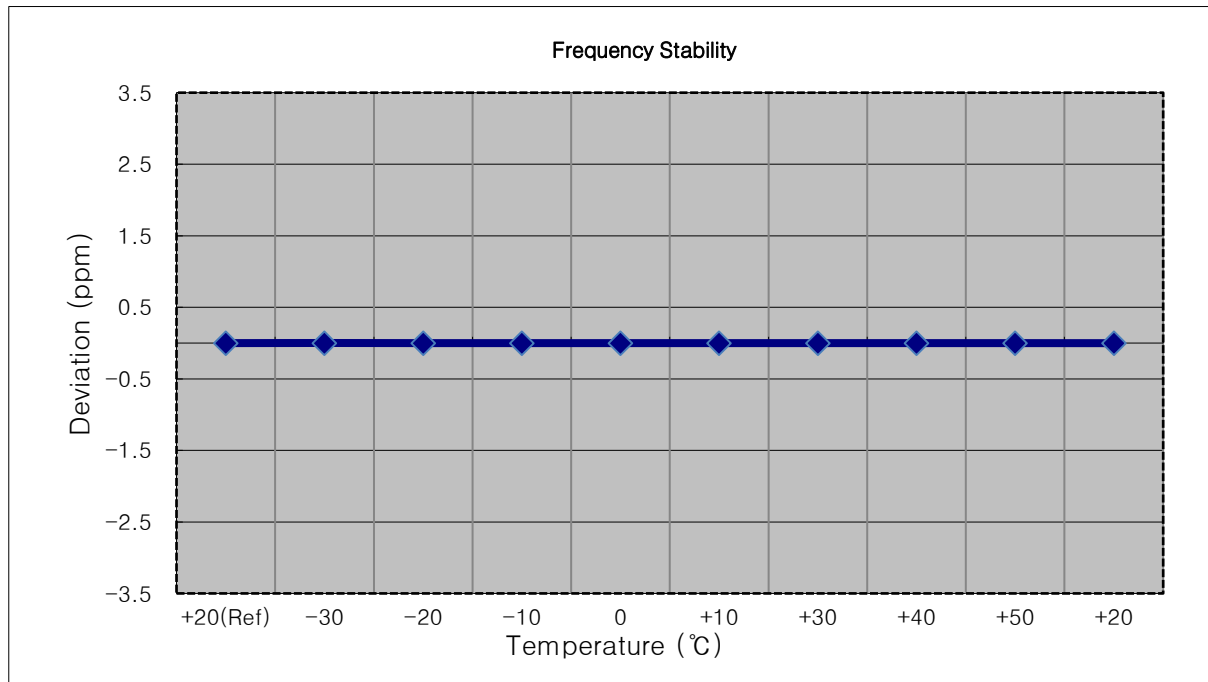


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1880 000 000	0.0	0.000 000	0.000
100 %		-30	1880 000 000	0.1	0.000 000	0.000
100 %		-20	1880 000 000	0.3	0.000 000	0.000
100 %		-10	1880 000 002	2.1	0.000 000	0.001
100 %		0	1880 000 000	0.1	0.000 000	0.000
100 %		+10	1880 000 002	1.4	0.000 000	0.001
100 %		+30	1880 000 000	-0.5	0.000 000	0.000
100 %		+40	1879 999 998	-2.1	0.000 000	-0.001
100 %		+50	1879 999 999	-1.3	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1880 000 000	0.3	0.000 000

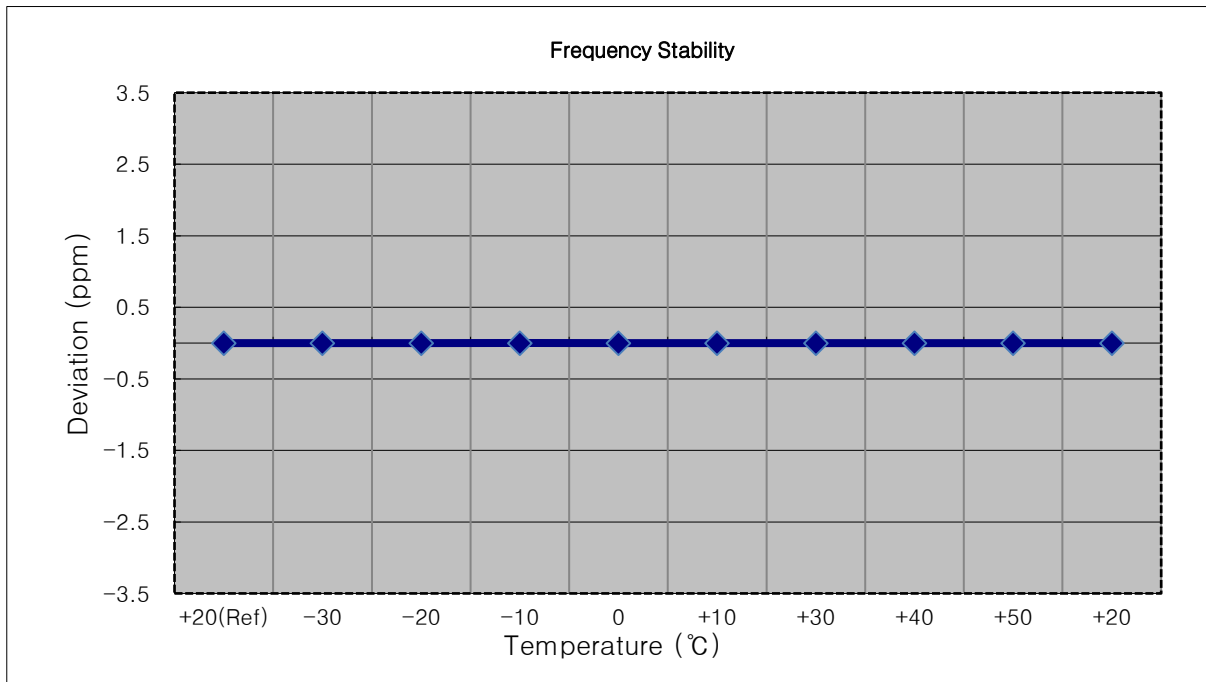


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1879 999 999	0.0	0.000 000	0.000
100 %		-30	1879 999 996	-3.0	0.000 000	-0.002
100 %		-20	1880 000 001	2.7	0.000 000	0.001
100 %		-10	1880 000 000	1.1	0.000 000	0.001
100 %		0	1879 999 999	0.7	0.000 000	0.000
100 %		+10	1879 999 999	0.5	0.000 000	0.000
100 %		+30	1880 000 001	2.7	0.000 000	0.001
100 %		+40	1880 000 000	0.9	0.000 000	0.000
100 %		+50	1879 999 999	-0.1	0.000 000	0.000
Batt. Endpoint		3.400	+20	1879 999 999	0.2	0.000 000

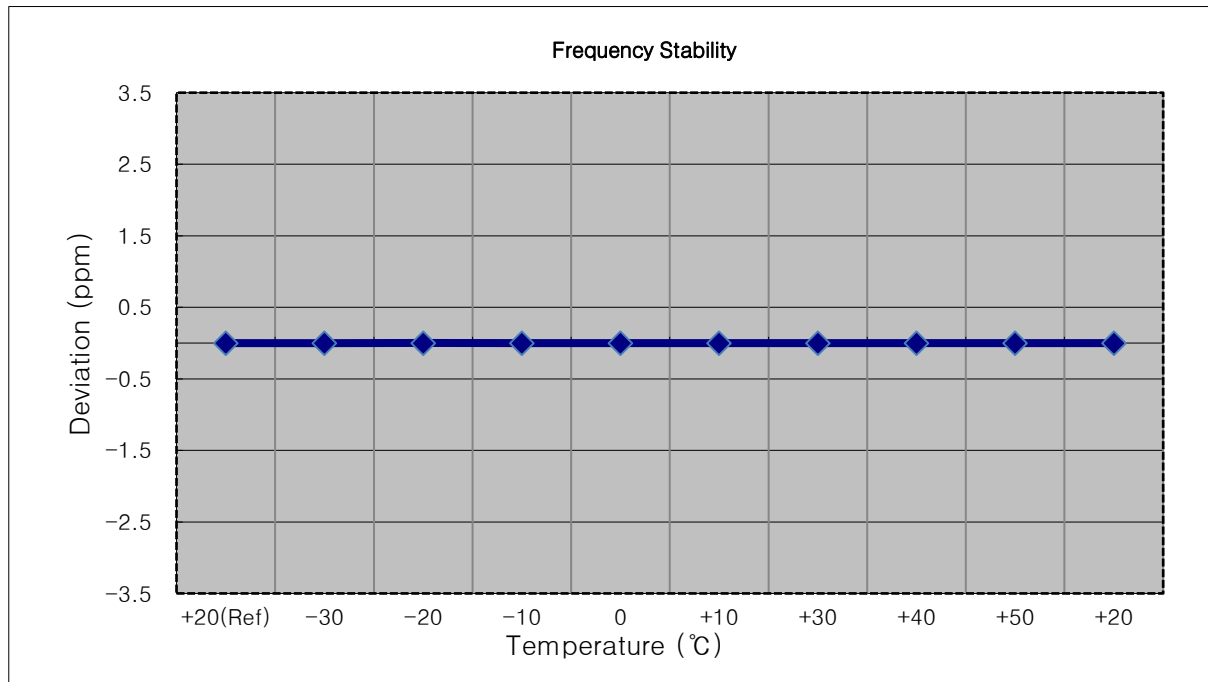


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1880 000 000	0.0	0.000 000	0.000
100 %		-30	1880 000 000	0.0	0.000 000	0.000
100 %		-20	1880 000 000	0.2	0.000 000	0.000
100 %		-10	1880 000 002	2.3	0.000 000	0.001
100 %		0	1880 000 000	0.0	0.000 000	0.000
100 %		+10	1879 999 999	-1.0	0.000 000	-0.001
100 %		+30	1880 000 000	0.2	0.000 000	0.000
100 %		+40	1879 999 997	-2.5	0.000 000	-0.001
100 %		+50	1880 000 001	1.6	0.000 000	0.001
Batt. Endpoint		3.400	+20	1880 000 000	0.4	0.000 000

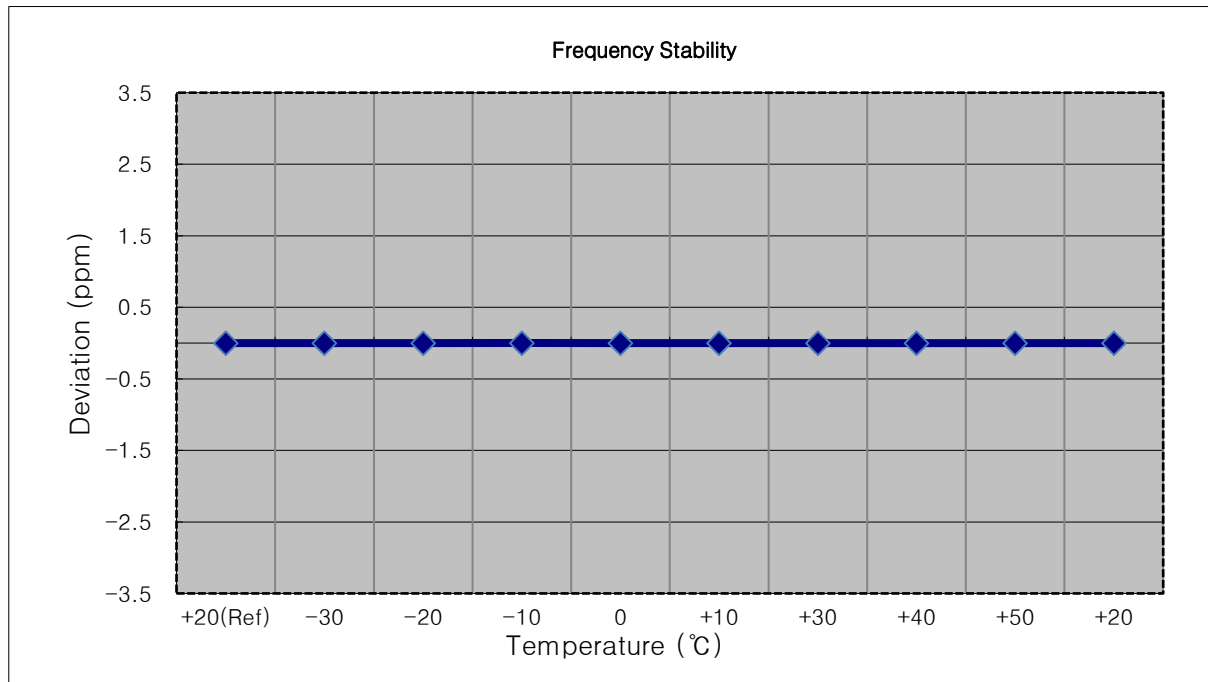


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1880 000 000	0.0	0.000 000	0.000
100 %		-30	1880 000 002	1.7	0.000 000	0.001
100 %		-20	1880 000 000	-0.2	0.000 000	0.000
100 %		-10	1879 999 999	-1.4	0.000 000	-0.001
100 %		0	1880 000 002	1.7	0.000 000	0.001
100 %		+10	1880 000 000	0.1	0.000 000	0.000
100 %		+30	1880 000 000	-0.3	0.000 000	0.000
100 %		+40	1880 000 000	-0.7	0.000 000	0.000
100 %		+50	1880 000 001	0.5	0.000 000	0.000
Batt. Endpoint	3.400	+20	1879 999 999	-1.2	0.000 000	-0.001

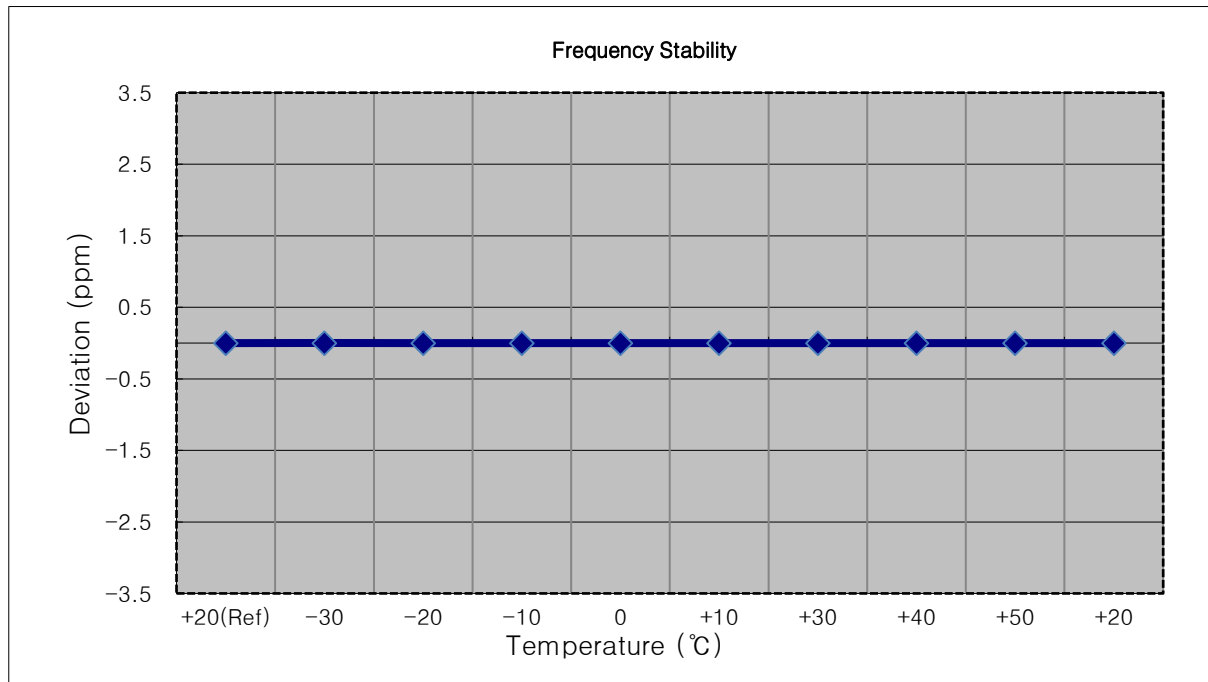


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1880 000 001	0.0	0.000 000	0.000
100 %		-30	1880 000 000	-1.0	0.000 000	-0.001
100 %		-20	1880 000 002	0.7	0.000 000	0.000
100 %		-10	1880 000 000	-0.8	0.000 000	0.000
100 %		0	1880 000 002	0.7	0.000 000	0.000
100 %		+10	1880 000 002	1.1	0.000 000	0.001
100 %		+30	1880 000 002	0.7	0.000 000	0.000
100 %		+40	1880 000 000	-1.1	0.000 000	-0.001
100 %		+50	1880 000 001	0.4	0.000 000	0.000
Batt. Endpoint	3.400	+20	1880 000 001	-0.1	0.000 000	0.000

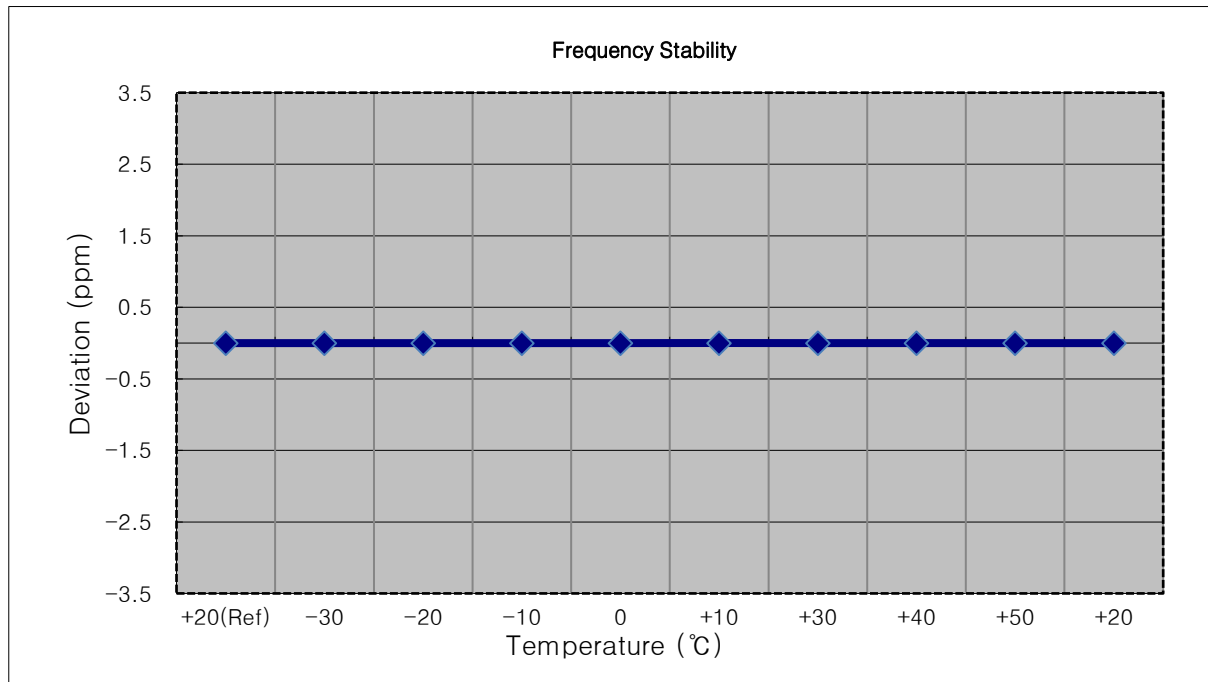


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1880 000 000	0.0	0.000 000	0.000
100 %		-30	1880 000 001	1.4	0.000 000	0.001
100 %		-20	1880 000 000	0.0	0.000 000	0.000
100 %		-10	1879 999 999	-1.1	0.000 000	-0.001
100 %		0	1880 000 000	0.1	0.000 000	0.000
100 %		+10	1880 000 001	1.2	0.000 000	0.001
100 %		+30	1880 000 001	1.3	0.000 000	0.001
100 %		+40	1879 999 999	-1.3	0.000 000	-0.001
100 %		+50	1880 000 001	1.6	0.000 000	0.001
Batt. Endpoint		3.400	+20	1880 000 001	1.2	0.000 000

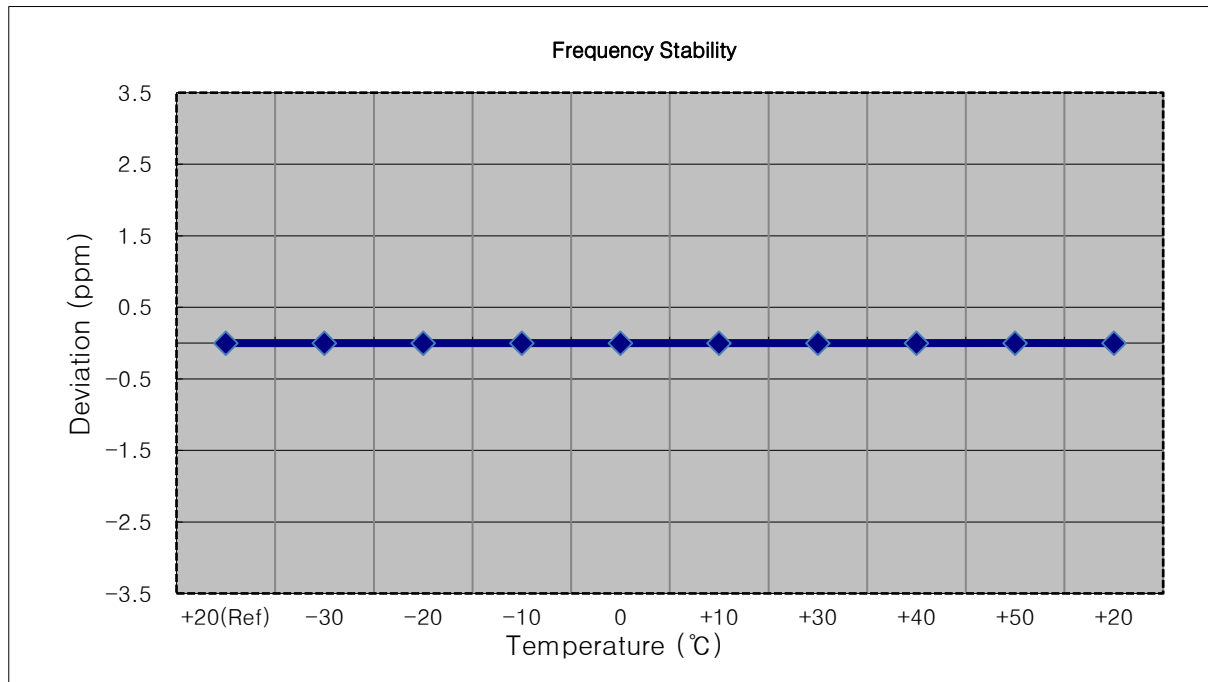


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1909,300,000 Hz
- ▣ CHANNEL: 19193 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1909 299 001	0.0	0.000 000	0.000
100 %		-30	1909 299 002	0.8	0.000 000	0.000
100 %		-20	1909 299 002	1.2	0.000 000	0.001
100 %		-10	1909 299 002	1.3	0.000 000	0.001
100 %		0	1909 299 002	1.0	0.000 000	0.001
100 %		+10	1909 299 003	2.2	0.000 000	0.001
100 %		+30	1909 299 001	-0.3	0.000 000	0.000
100 %		+40	1909 299 001	-0.1	0.000 000	0.000
100 %		+50	1909 299 001	-0.2	0.000 000	0.000
Batt. Endpoint		3.400	+20	1909 299 001	-0.3	0.000 000

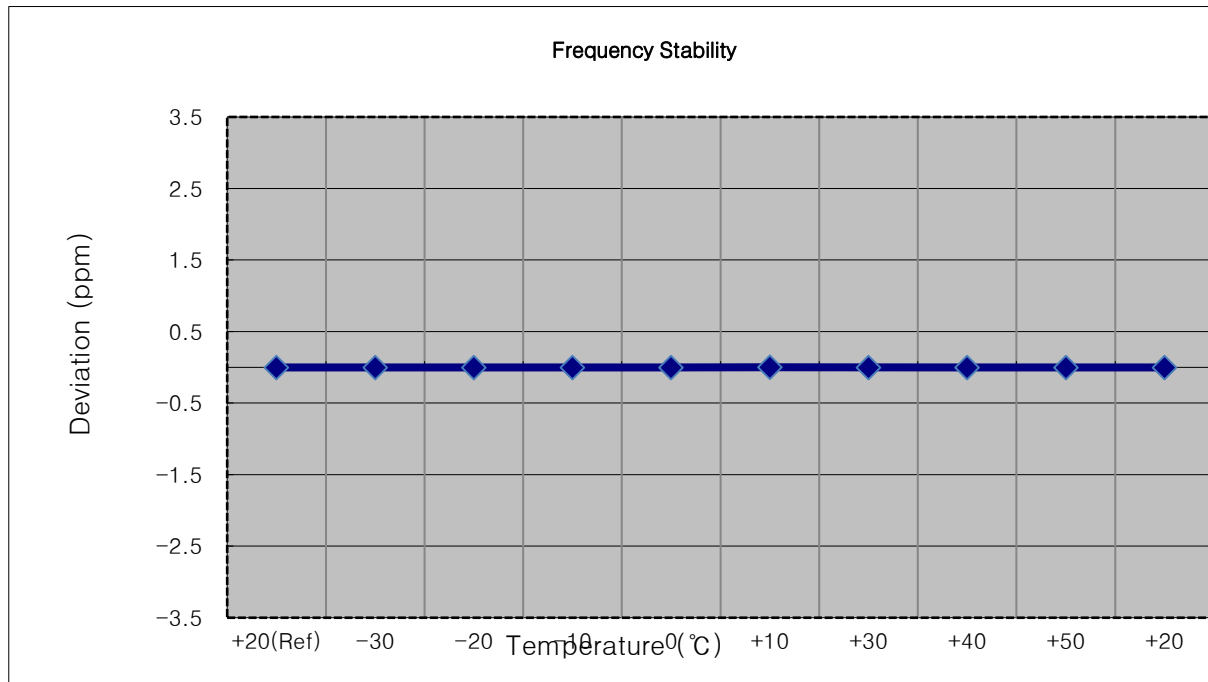


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1908,500,000 Hz
- ▣ CHANNEL: 19185 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1908 499 999	0.0	0.000 000	0.000
100 %		-30	1908 499 998	-1.2	0.000 000	-0.001
100 %		-20	1908 499 999	-0.7	0.000 000	0.000
100 %		-10	1908 500 001	1.3	0.000 000	0.001
100 %		0	1908 500 000	0.3	0.000 000	0.000
100 %		+10	1908 500 001	1.2	0.000 000	0.001
100 %		+30	1908 500 000	0.5	0.000 000	0.000
100 %		+40	1908 500 000	0.1	0.000 000	0.000
100 %		+50	1908 499 999	-0.2	0.000 000	0.000
Batt. Endpoint		3.400	+20	1908 500 001	1.4	0.000 000

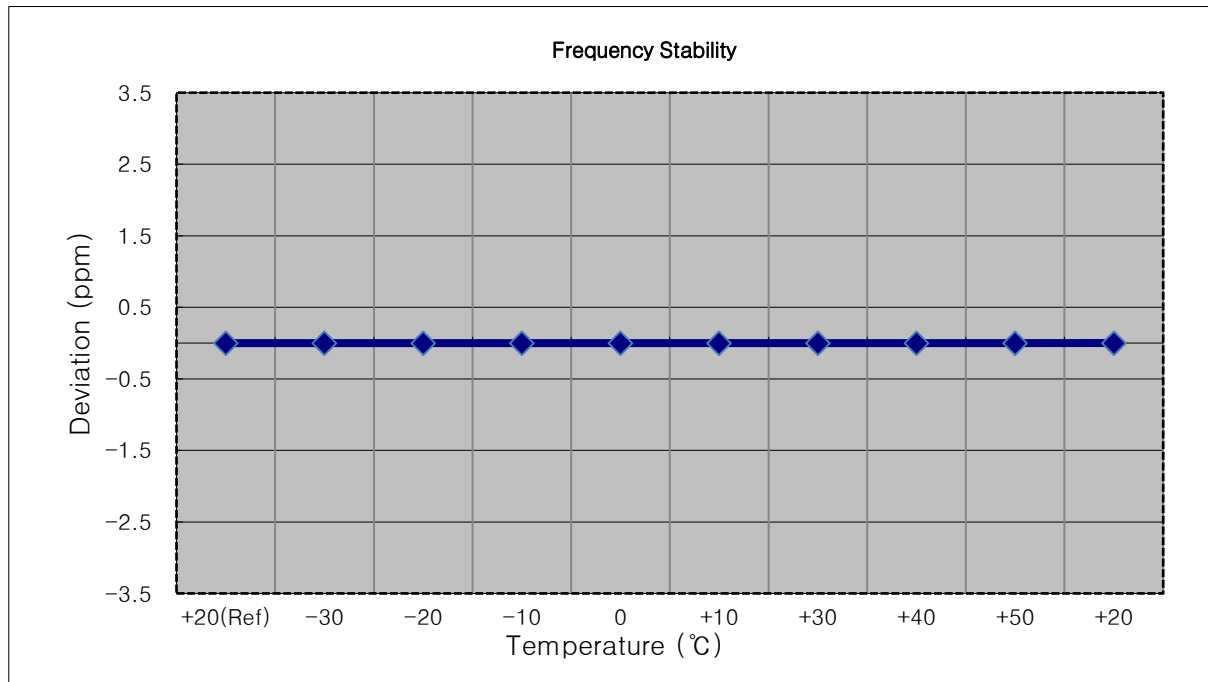


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1907,500,000 Hz
- ▣ CHANNEL: 19175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1907 500 003	0.0	0.000 000	0.000
100 %		-30	1907 500 001	-1.3	0.000 000	-0.001
100 %		-20	1907 500 005	2.1	0.000 000	0.001
100 %		-10	1907 500 005	2.3	0.000 000	0.001
100 %		0	1907 500 003	0.7	0.000 000	0.000
100 %		+10	1907 500 004	1.3	0.000 000	0.001
100 %		+30	1907 500 004	0.8	0.000 000	0.000
100 %		+40	1907 500 003	0.0	0.000 000	0.000
100 %		+50	1907 500 003	0.5	0.000 000	0.000
Batt. Endpoint		3.400	+20	1907 500 004	1.5	0.000 000

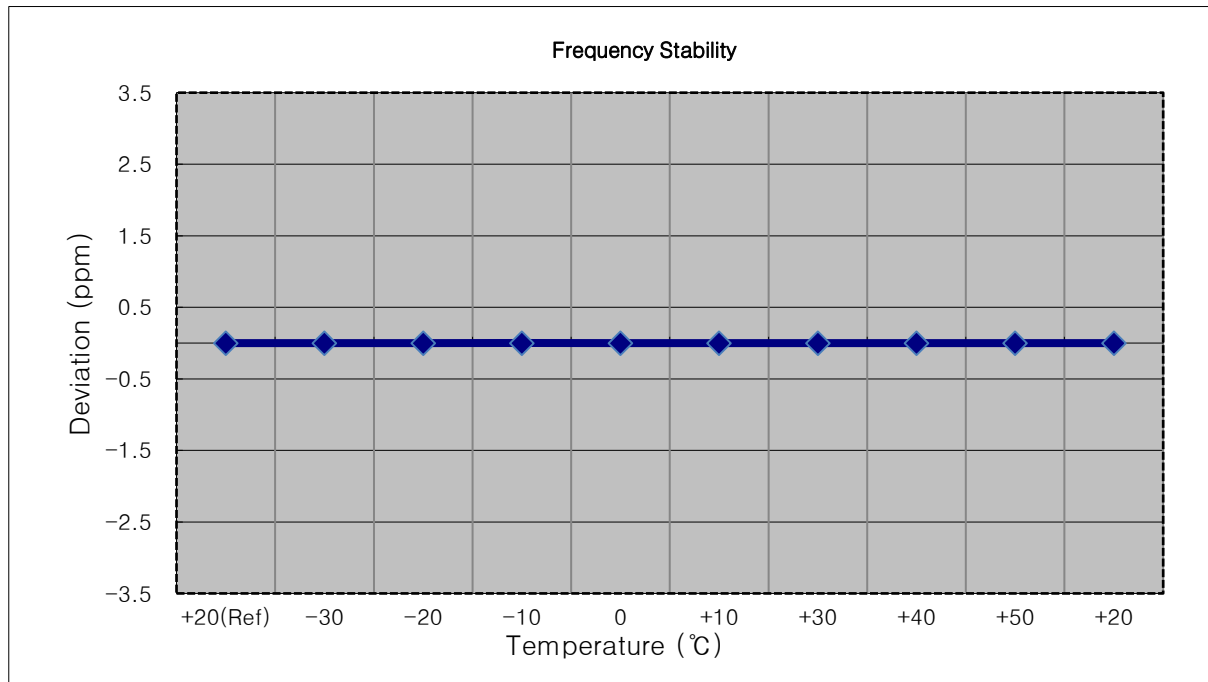


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1905,000,000 Hz
- ▣ CHANNEL: 19150 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1904 999 999	0.0	0.000 000	0.000
100 %		-30	1905 000 000	1.4	0.000 000	0.001
100 %		-20	1905 000 002	2.9	0.000 000	0.002
100 %		-10	1904 999 997	-2.2	0.000 000	-0.001
100 %		0	1904 999 999	0.6	0.000 000	0.000
100 %		+10	1904 999 999	0.4	0.000 000	0.000
100 %		+30	1904 999 998	-0.5	0.000 000	0.000
100 %		+40	1904 999 999	0.2	0.000 000	0.000
100 %		+50	1904 999 998	-1.3	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1904 999 999	0.2	0.000 000	0.000

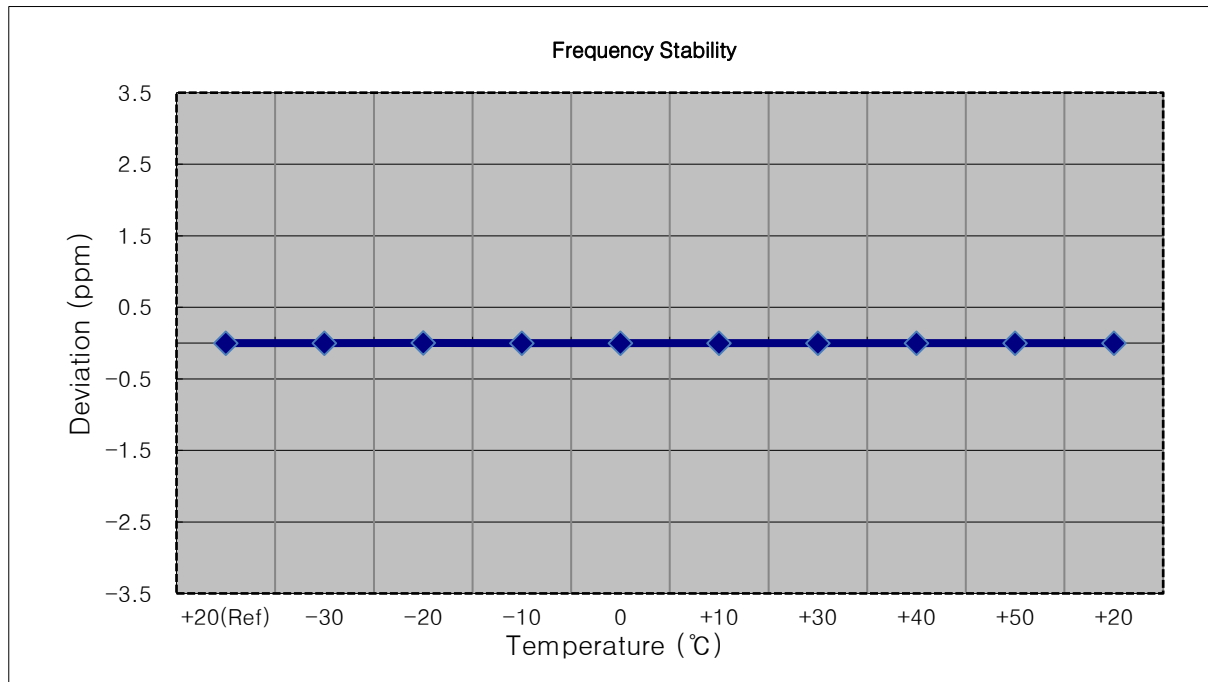


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1902,500,000 Hz
- ▣ CHANNEL: 19125 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1902 500 000	0.0	0.000 000	0.000
100 %		-30	1902 500 001	1.1	0.000 000	0.001
100 %		-20	1902 500 001	0.2	0.000 000	0.000
100 %		-10	1902 500 002	1.9	0.000 000	0.001
100 %		0	1902 500 000	-0.6	0.000 000	0.000
100 %		+10	1902 500 003	2.3	0.000 000	0.001
100 %		+30	1902 500 001	0.7	0.000 000	0.000
100 %		+40	1902 500 001	0.8	0.000 000	0.000
100 %		+50	1902 500 000	-0.7	0.000 000	0.000
Batt. Endpoint		3.400	+20	1902 500 002	2.0	0.000 000

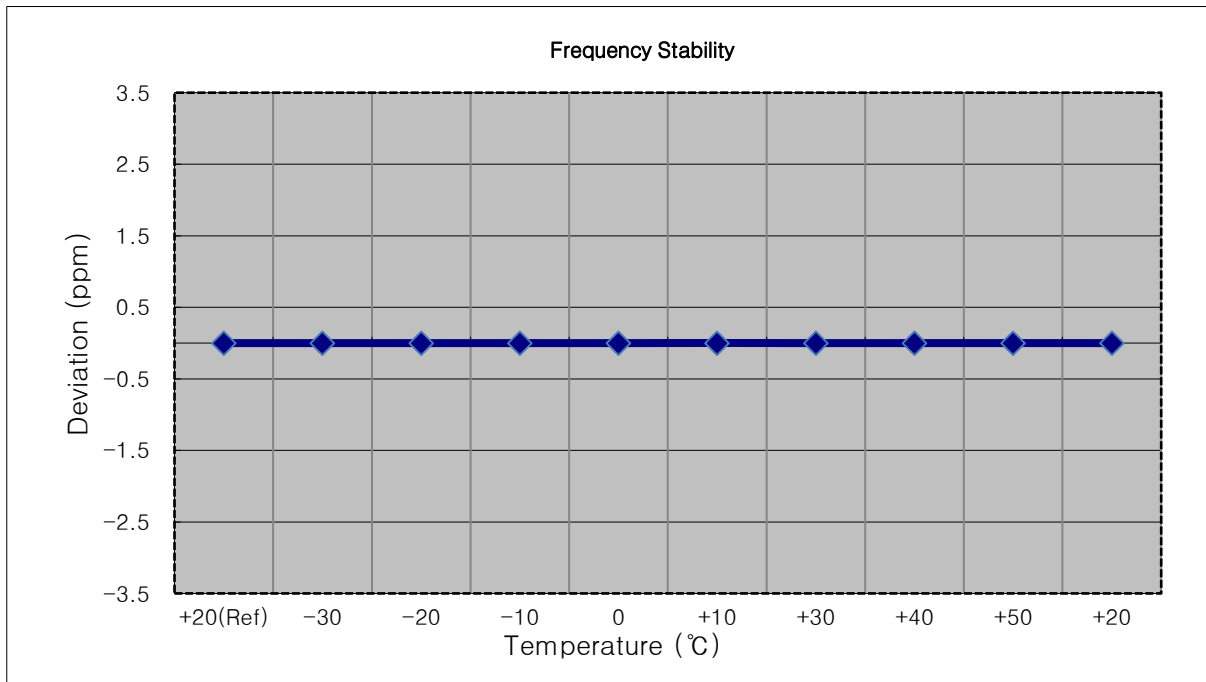


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1900,000,000 Hz
- ▣ CHANNEL: 19100 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	4.200	+20(Ref)	1900 000 002	0.0	0.000 000	0.000
100 %		-30	1900 000 002	0.2	0.000 000	0.000
100 %		-20	1900 000 003	1.3	0.000 000	0.001
100 %		-10	1900 000 000	-2.0	0.000 000	-0.001
100 %		0	1900 000 003	1.0	0.000 000	0.001
100 %		+10	1900 000 003	1.9	0.000 000	0.001
100 %		+30	1900 000 002	0.4	0.000 000	0.000
100 %		+40	1900 000 000	-2.0	0.000 000	-0.001
100 %		+50	1900 000 002	0.0	0.000 000	0.000
Batt. Endpoint		3.400	+20	1900 000 001	-0.8	0.000 000

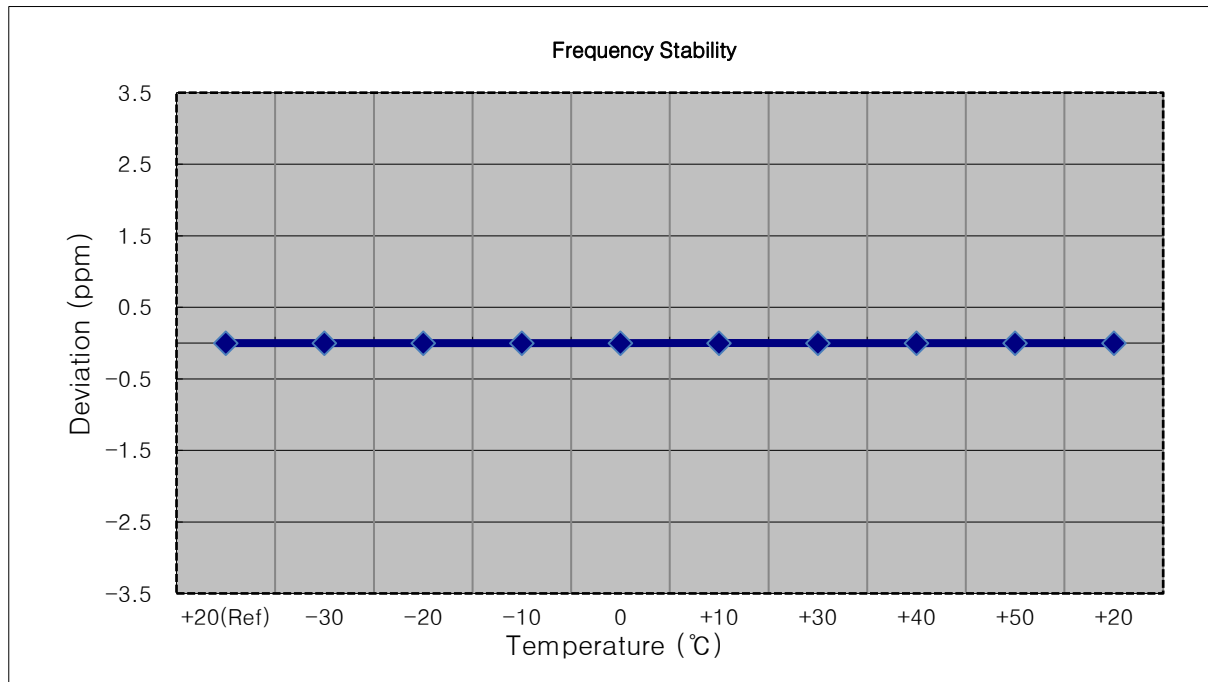


11. TEST PLOTS (Main 2 Ant)

BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(1)

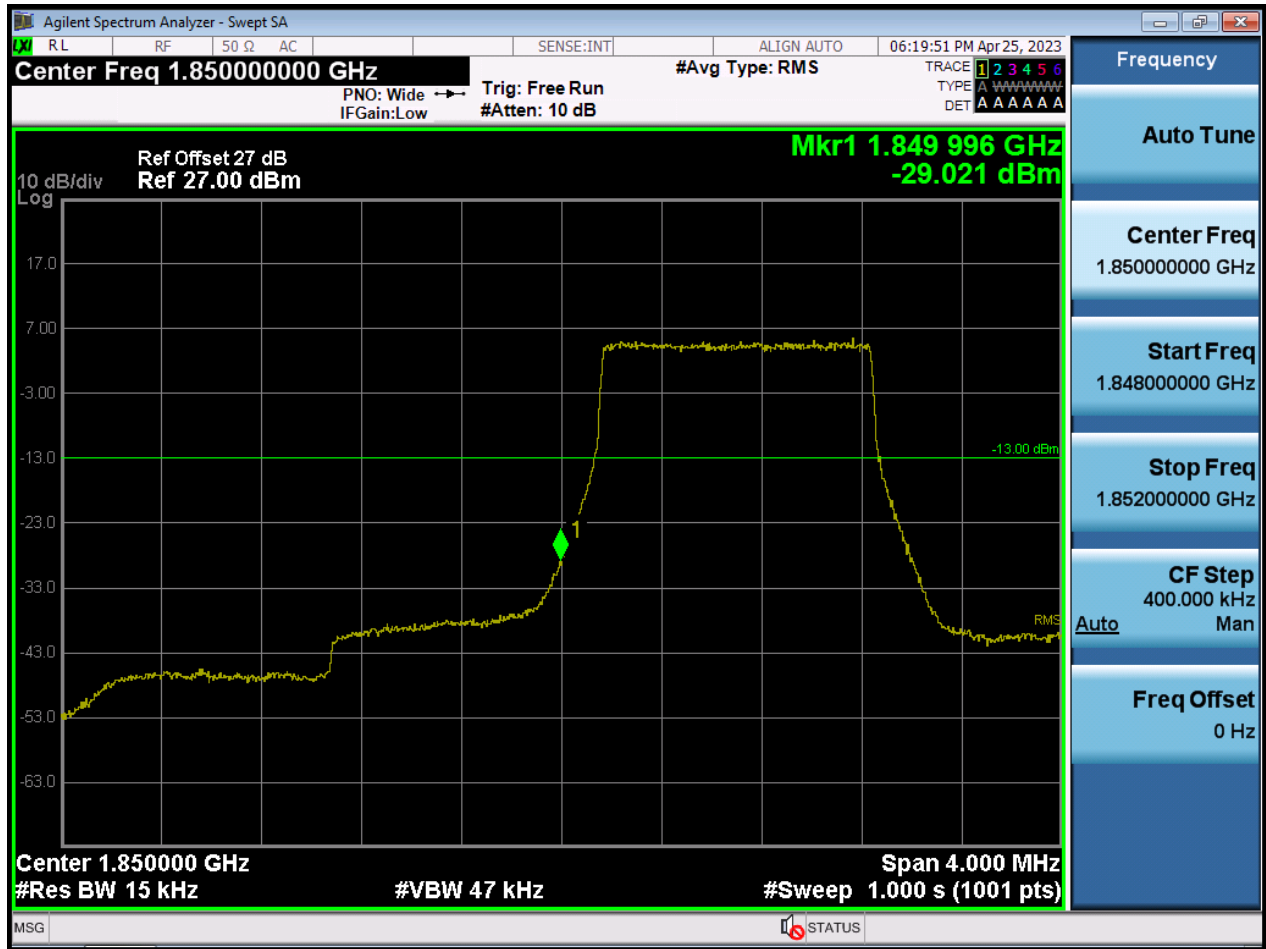

BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

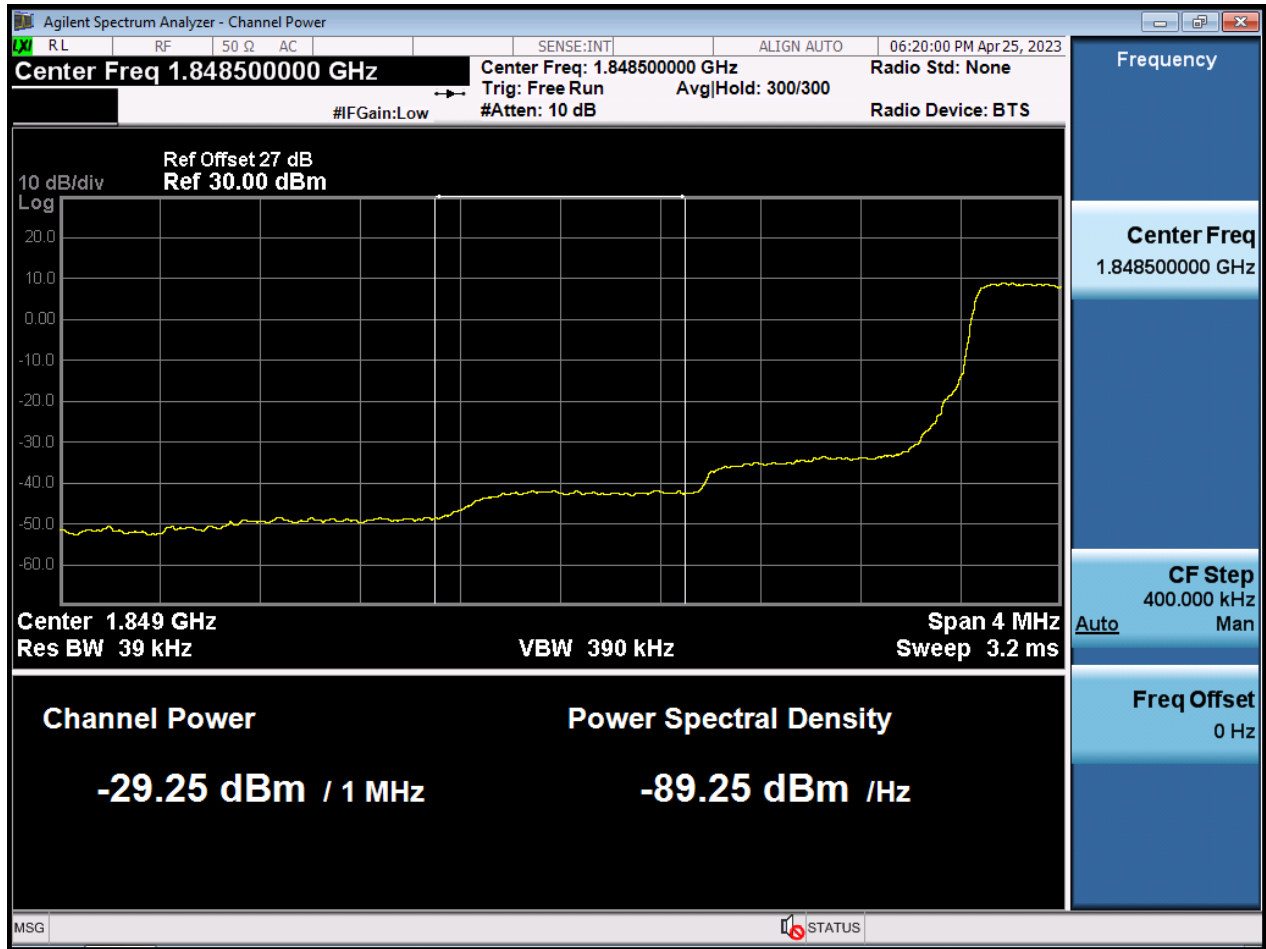


BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(1)




BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(2)



BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB

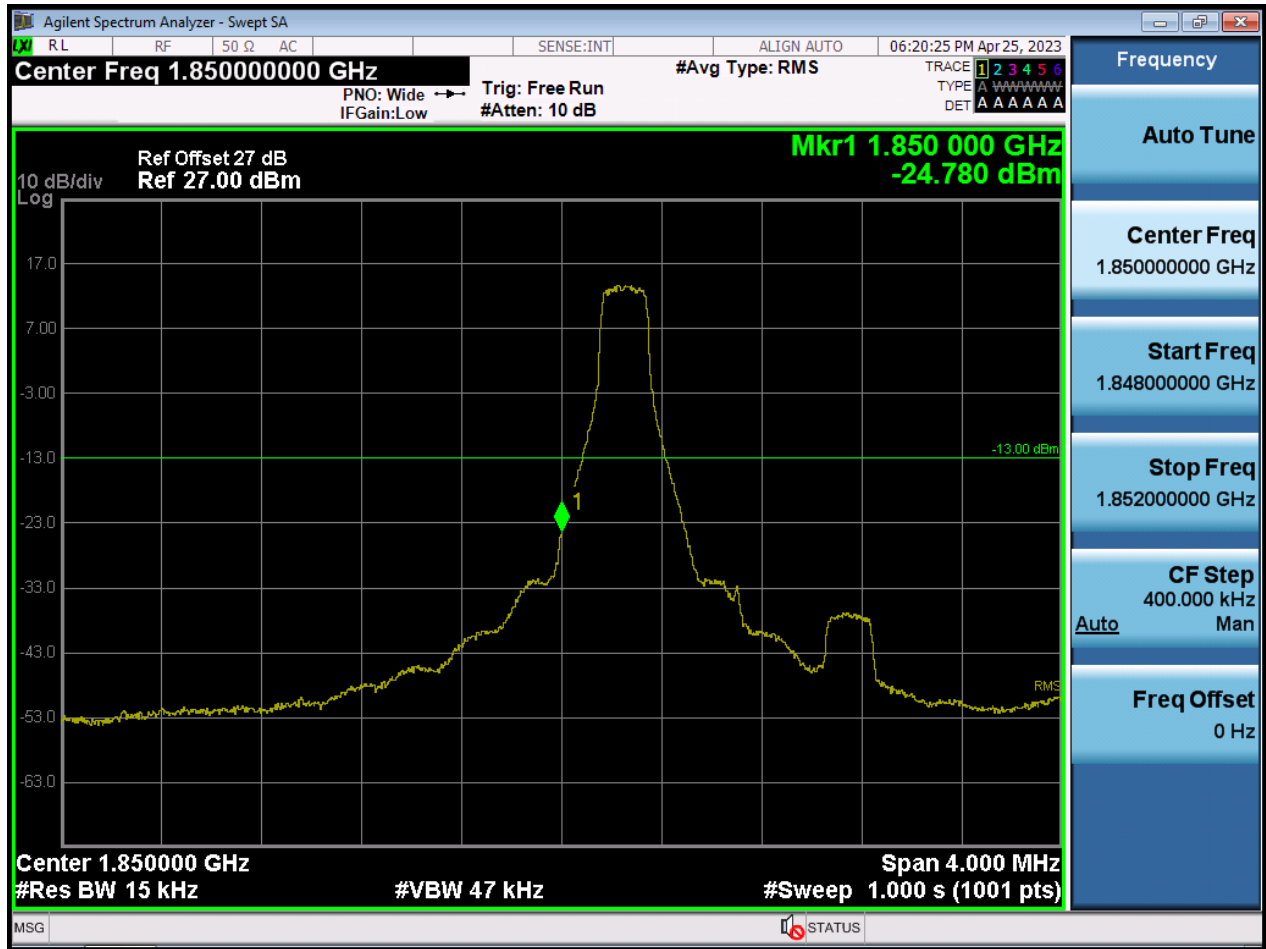


BW1.4 M_BandEdge_Highest Channel_QPSK_1RB

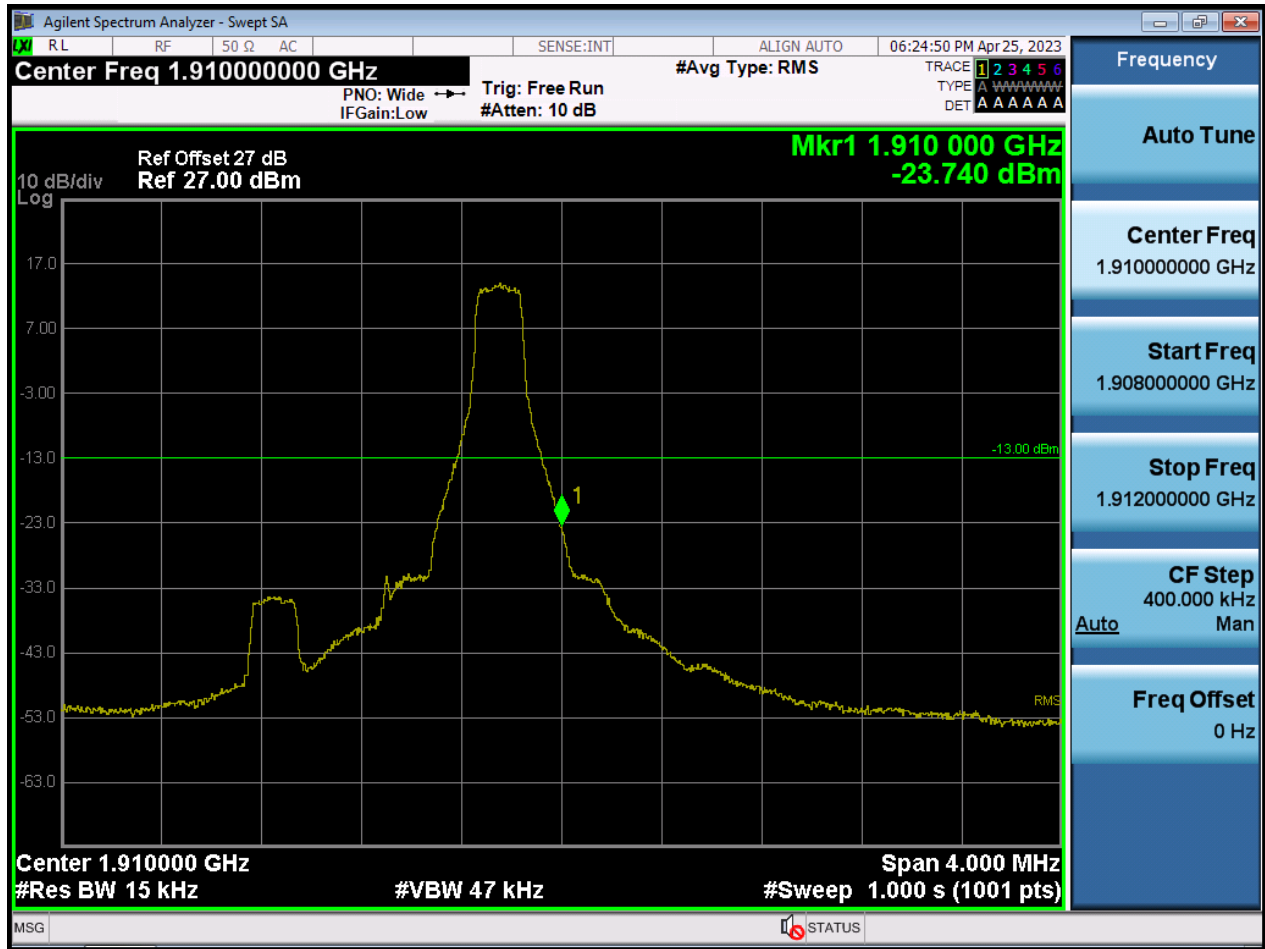

BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

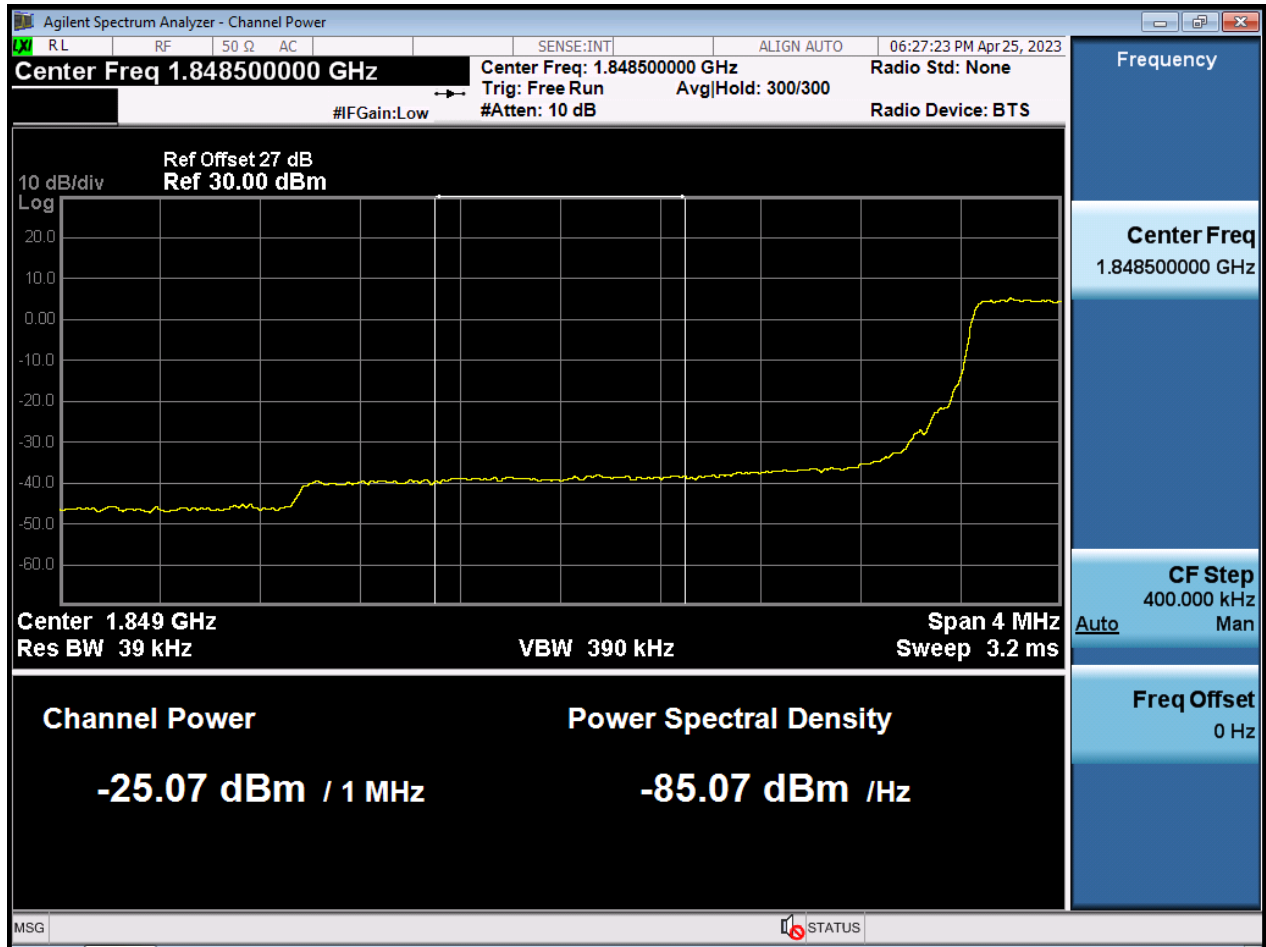

BW3 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW3 M_BandEdge_Highest Channel_QPSK_FullRB(2)

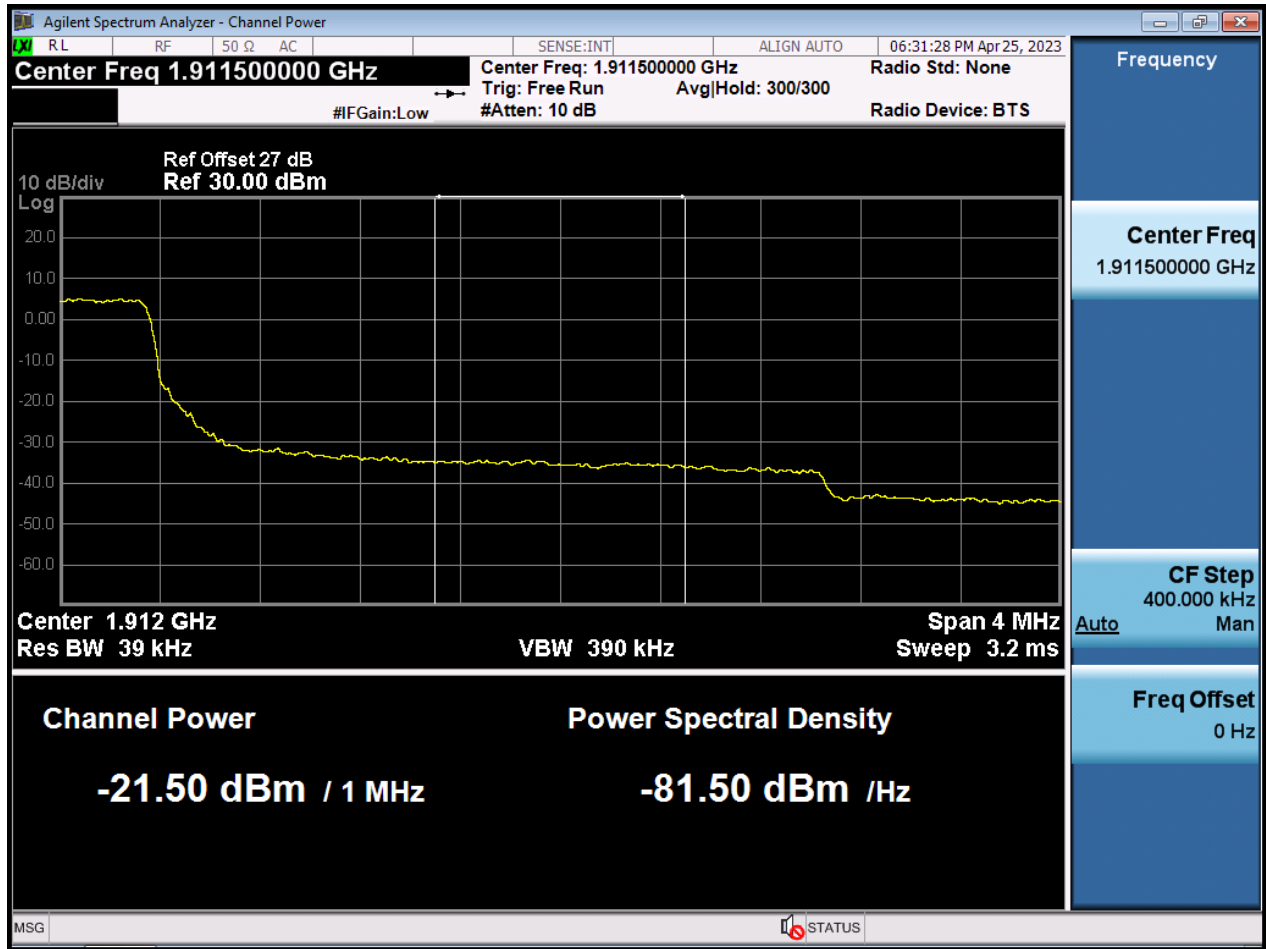

BW3 M_BandEdge_Lowest Channel_QPSK_1RB




BW3 M_BandEdge_Highest Channel_QPSK_1RB



BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

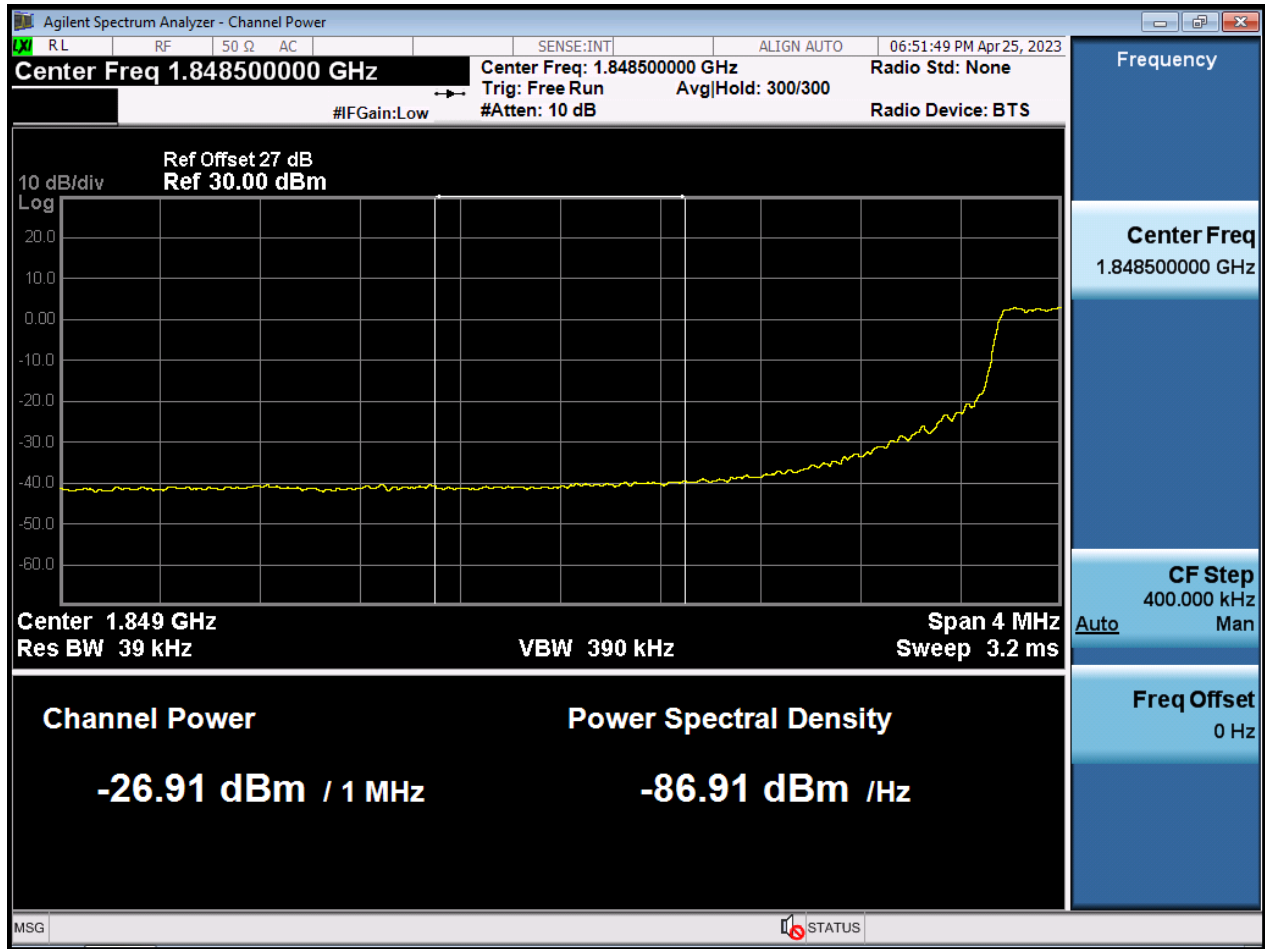

BW5 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW5 M_BandEdge_Highest Channel_QPSK_FullRB(2)

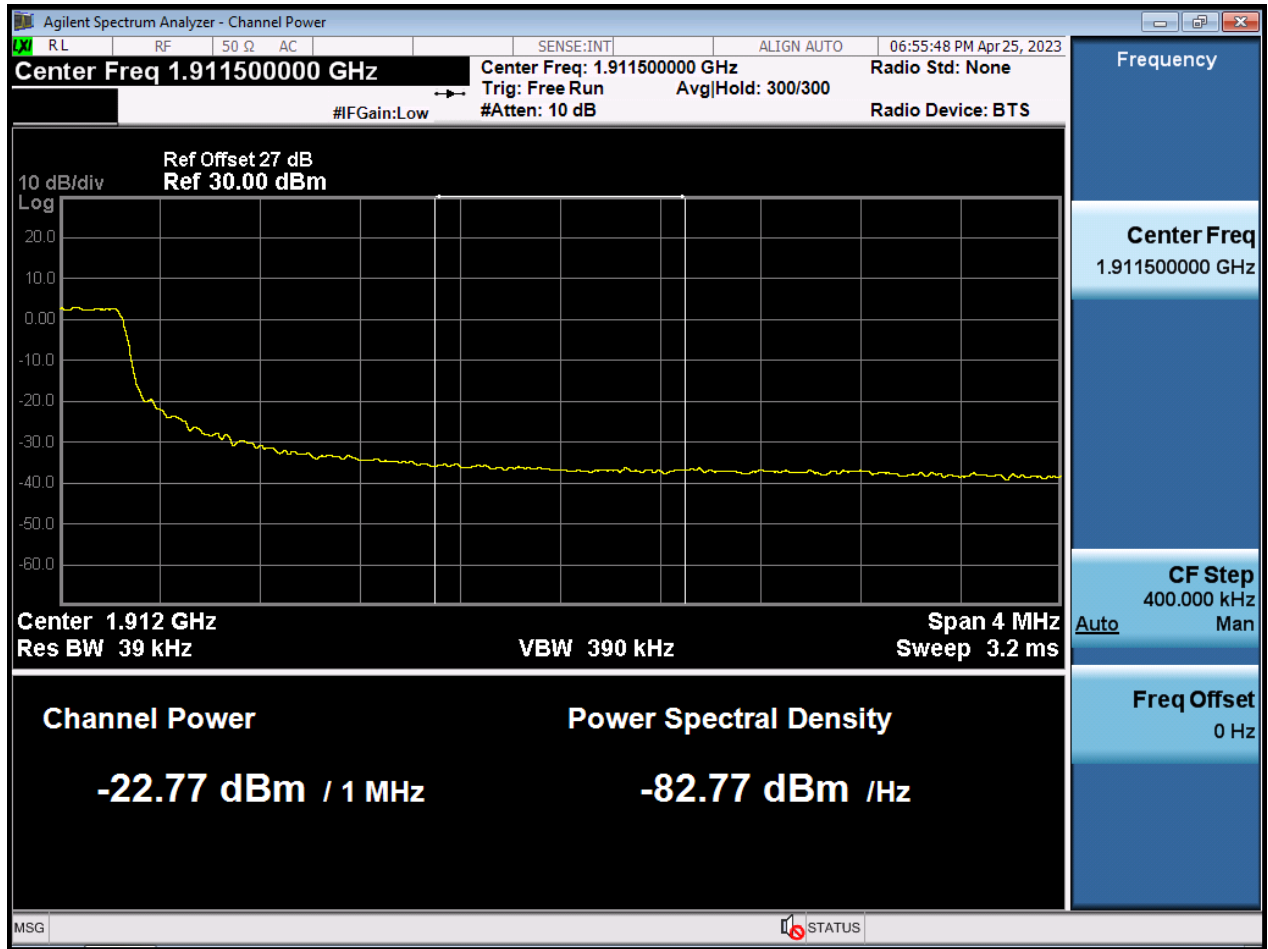

BW5 M_BandEdge_Lowest Channel_QPSK_1RB




BW5 M_BandEdge_Highest Channel_QPSK_1RB



BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

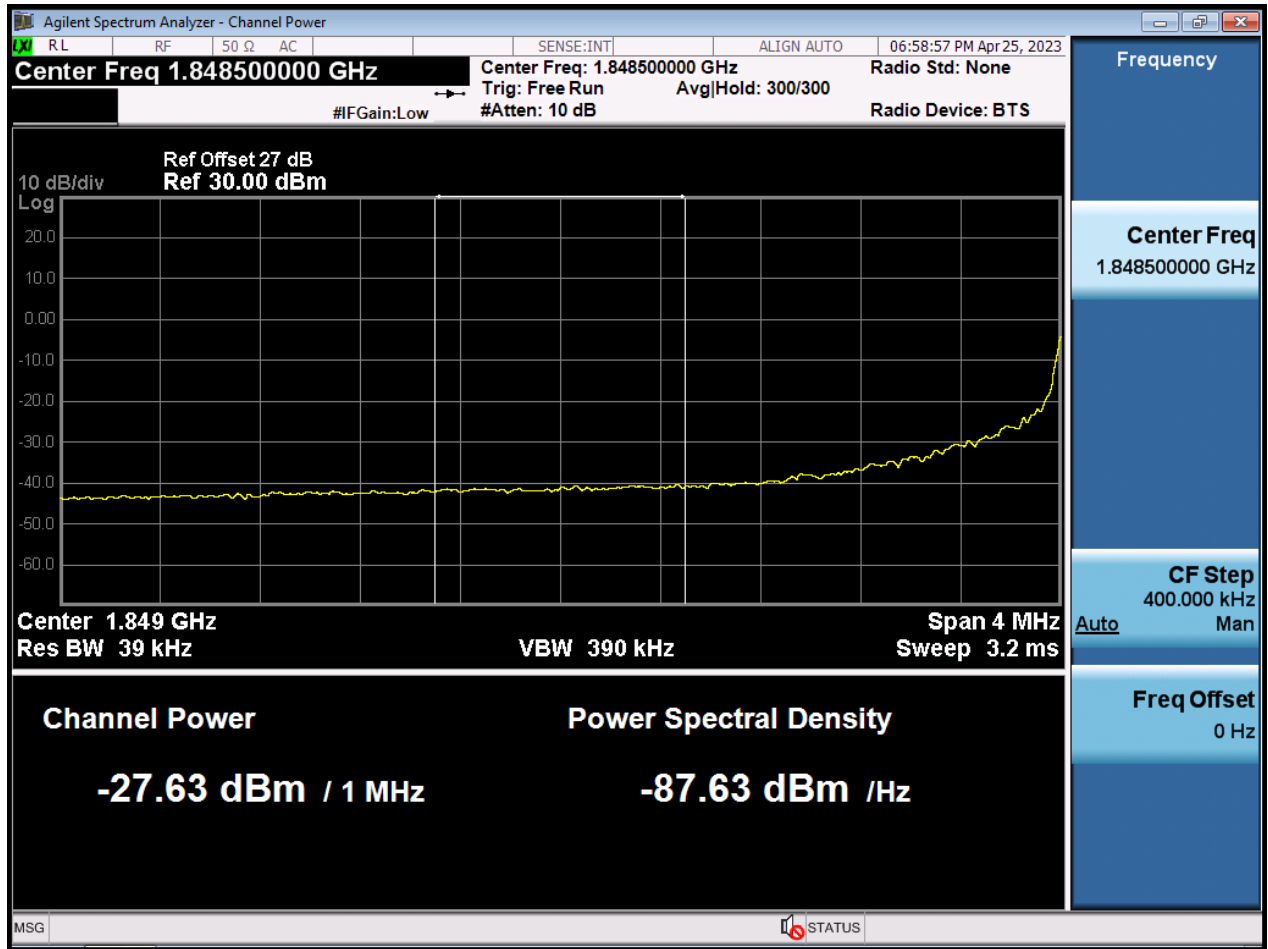

BW10 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW10 M_BandEdge_Highest Channel_QPSK_FullRB(2)

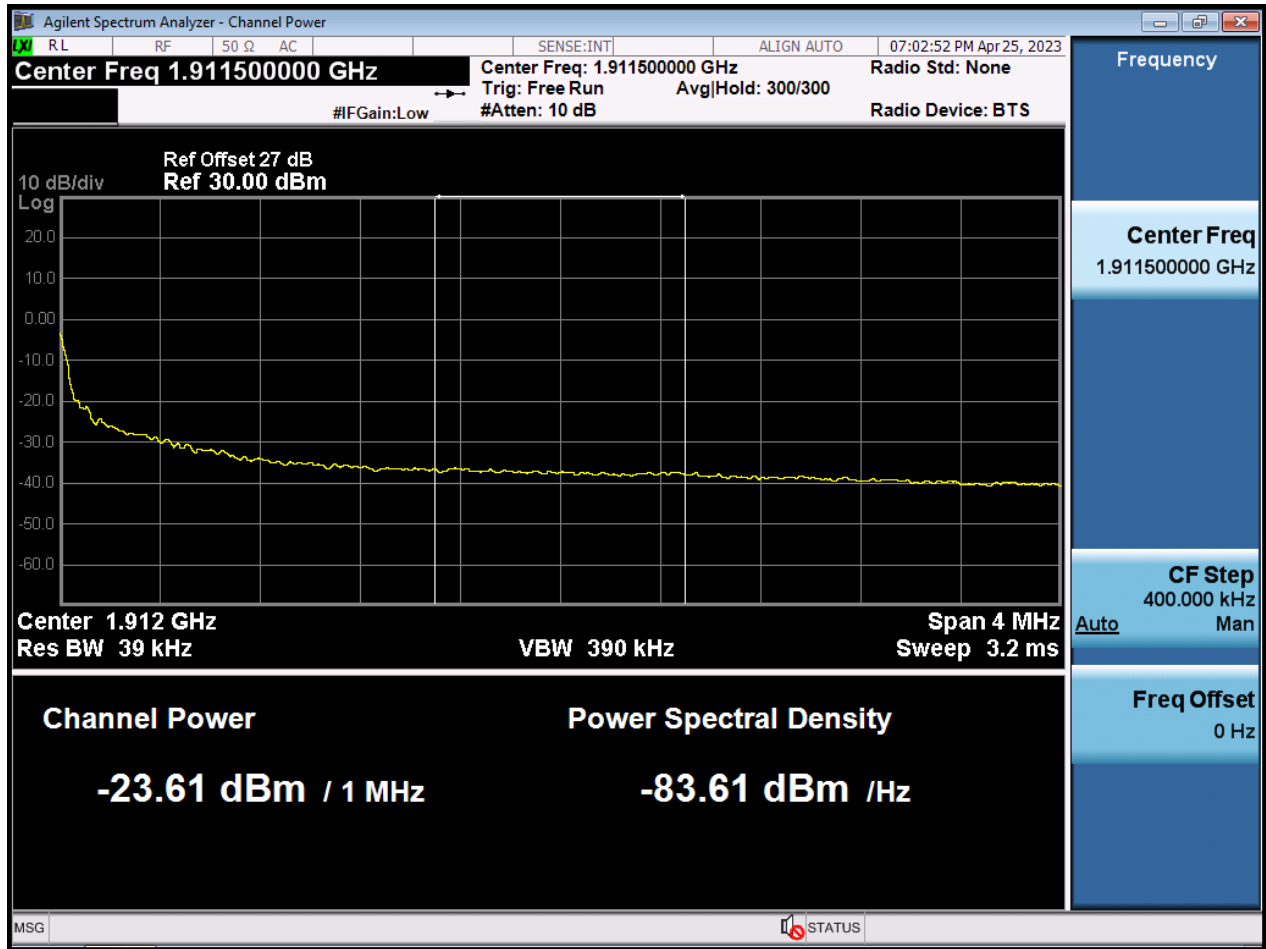

BW10 M_BandEdge_Lowest Channel_QPSK_1RB




BW10 M_BandEdge_Highest Channel_QPSK_1RB



BW15 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

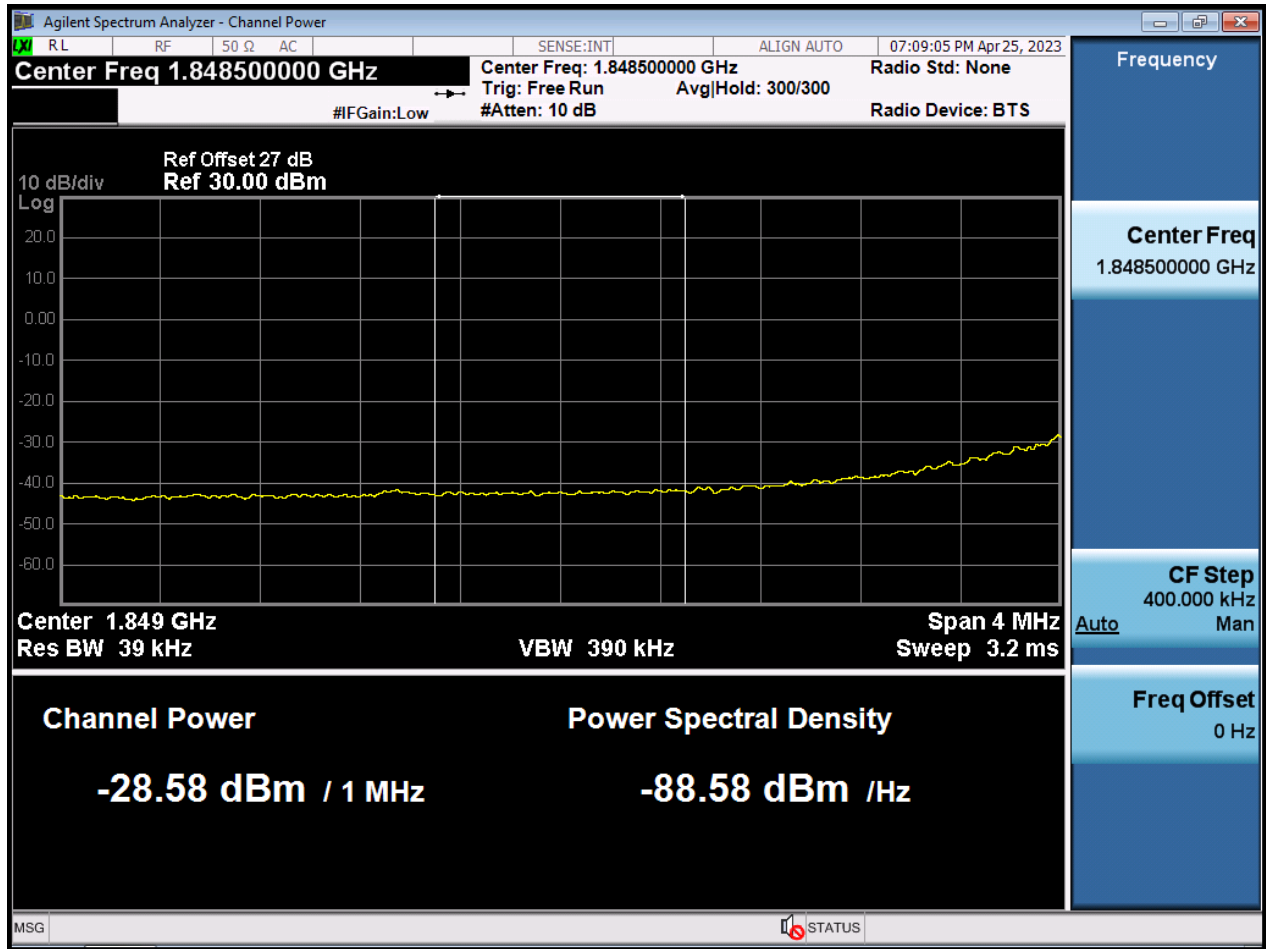

BW15 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW15 M_BandEdge_Highest Channel_QPSK_FullRB(2)

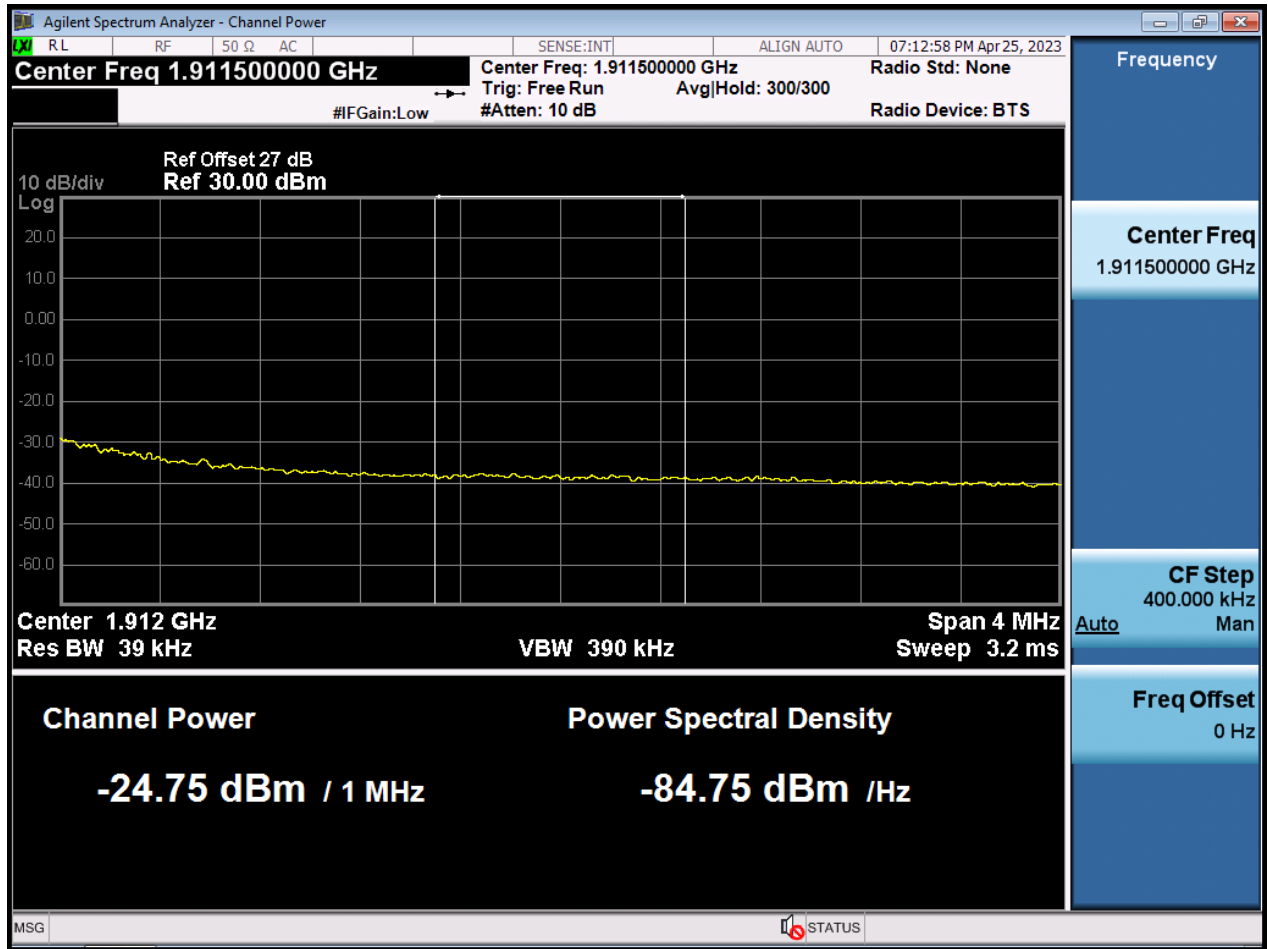

BW15 M_BandEdge_Lowest Channel_QPSK_1RB




BW15 M_BandEdge_Highest Channel_QPSK_1RB



BW20 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

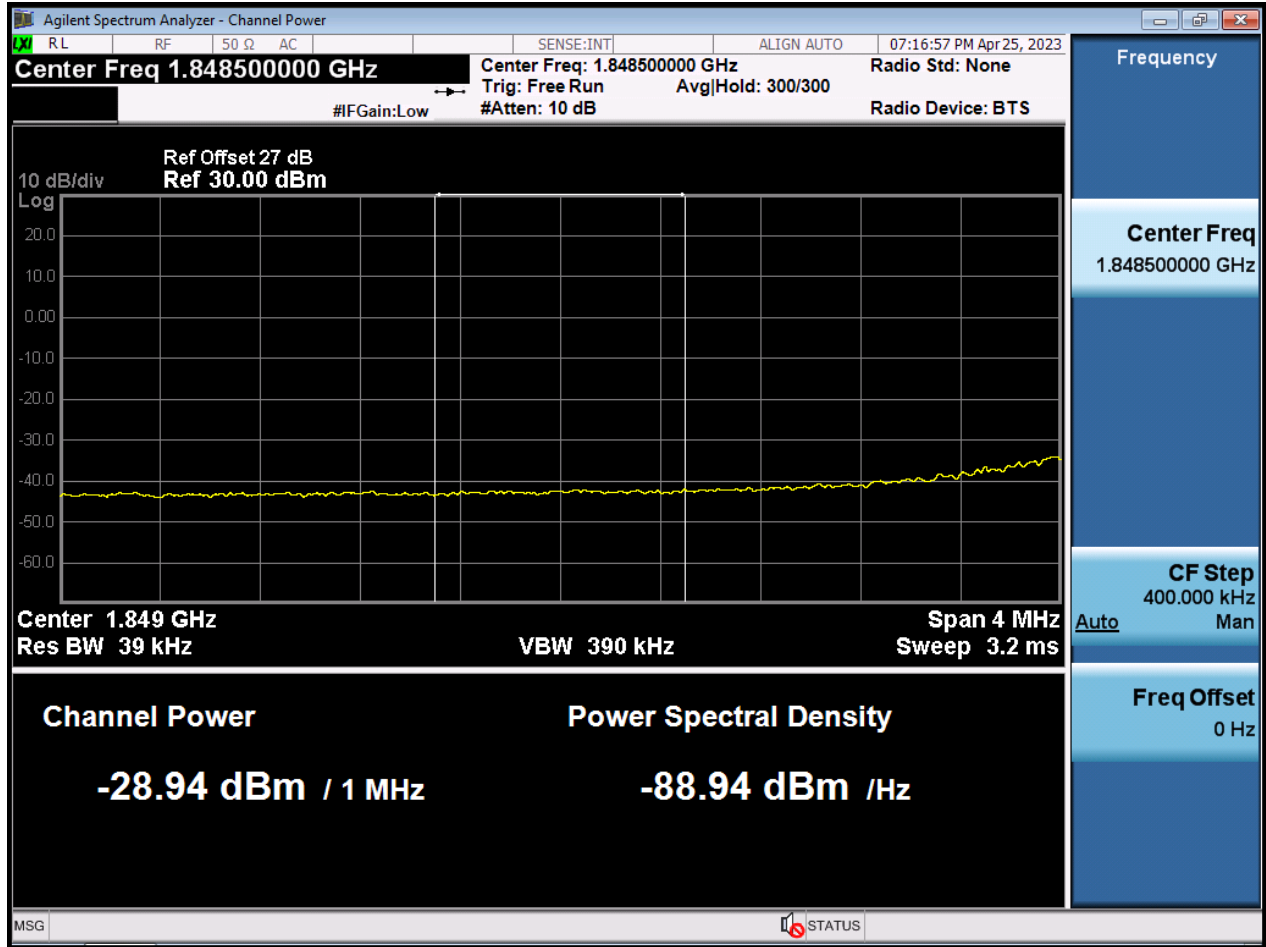

BW20 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(2)

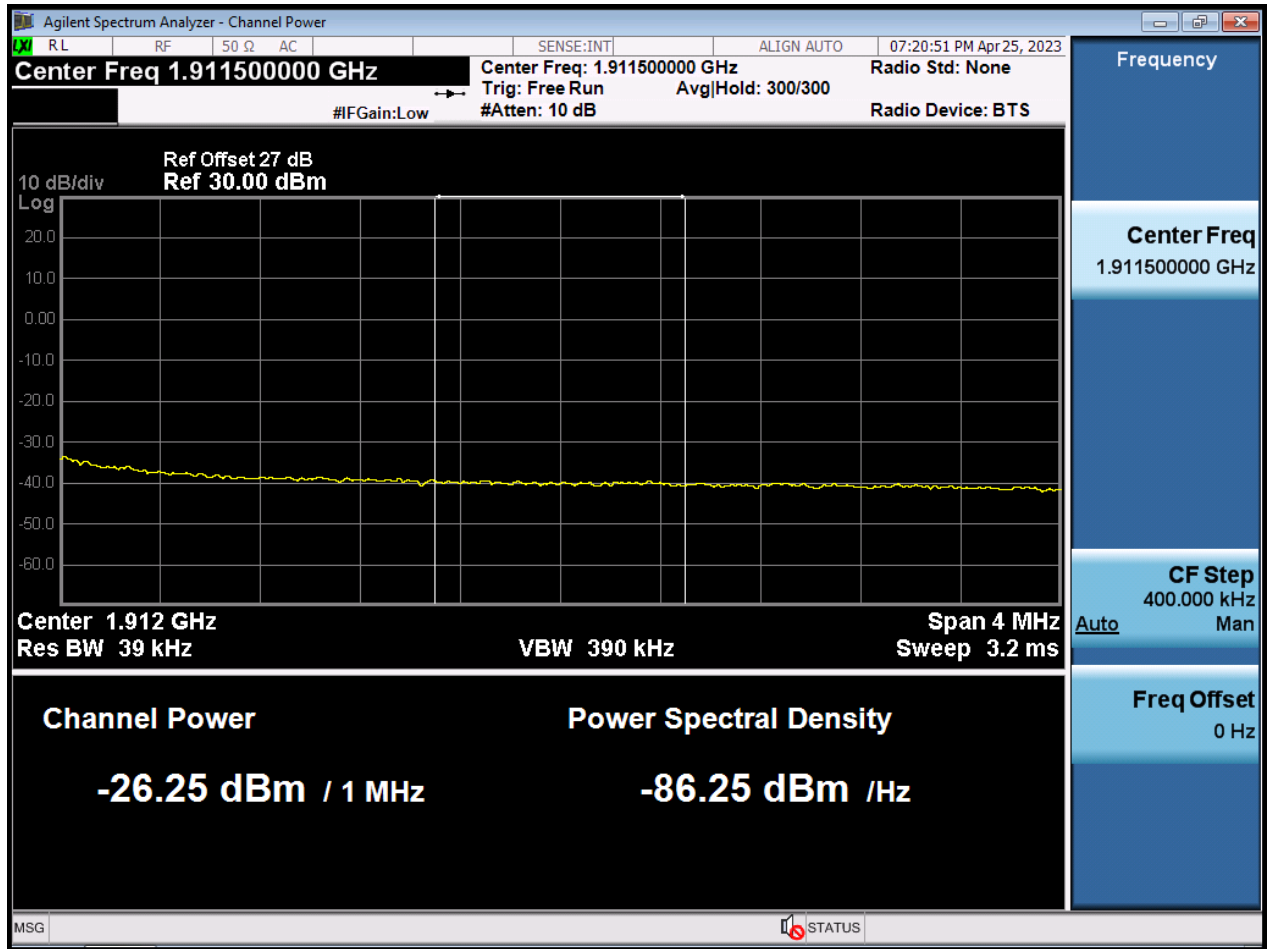


BW20 M_BandEdge_Lowest Channel_QPSK_1RB




BW20 M_BandEdge_Highest Channel_QPSK_1RB




BW1.4 M_OBW_Middle Channel_QPSK_FullRB

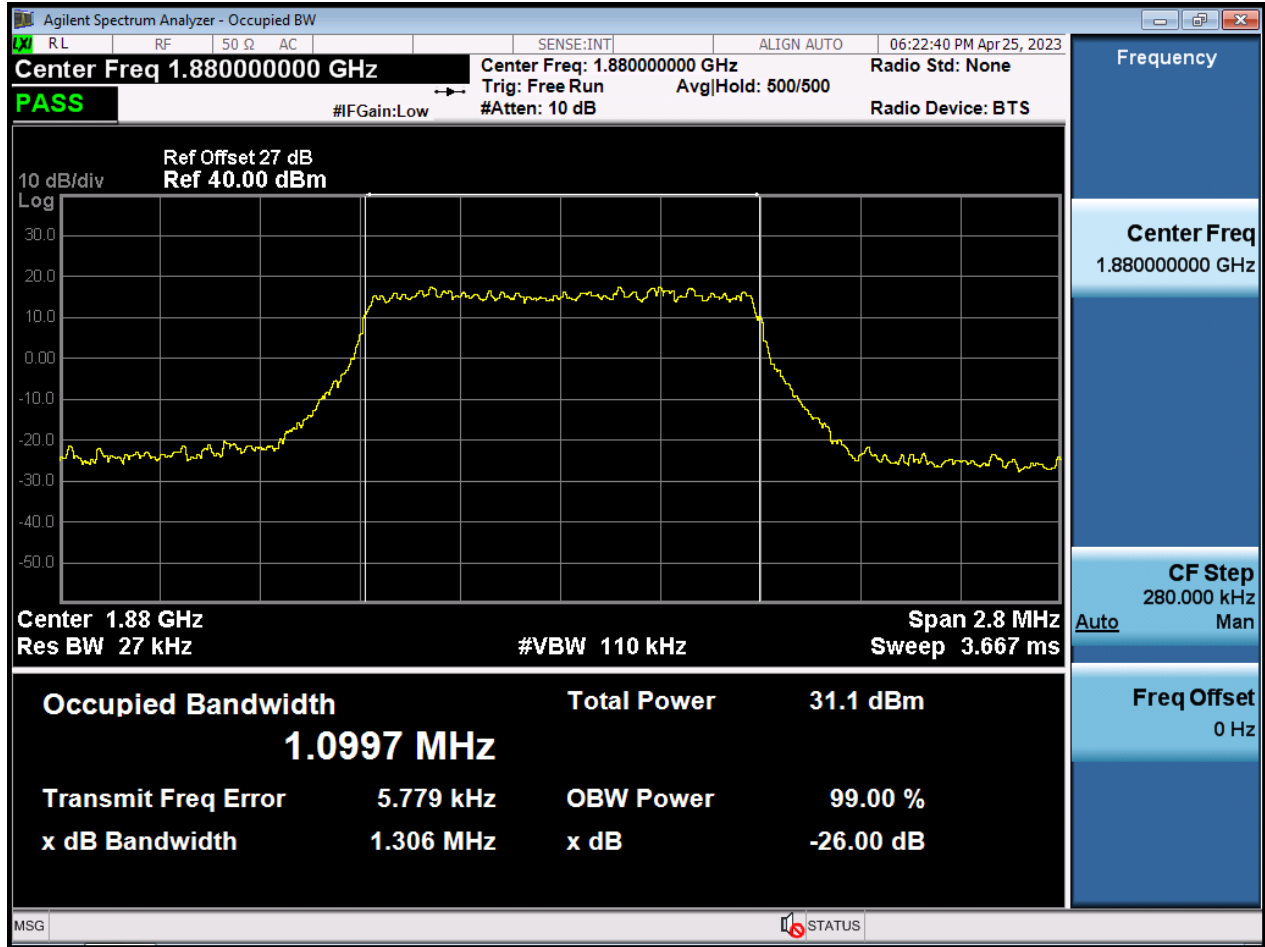


BW1.4 M_OBW_Middle Channel_16QAM_FullIRB

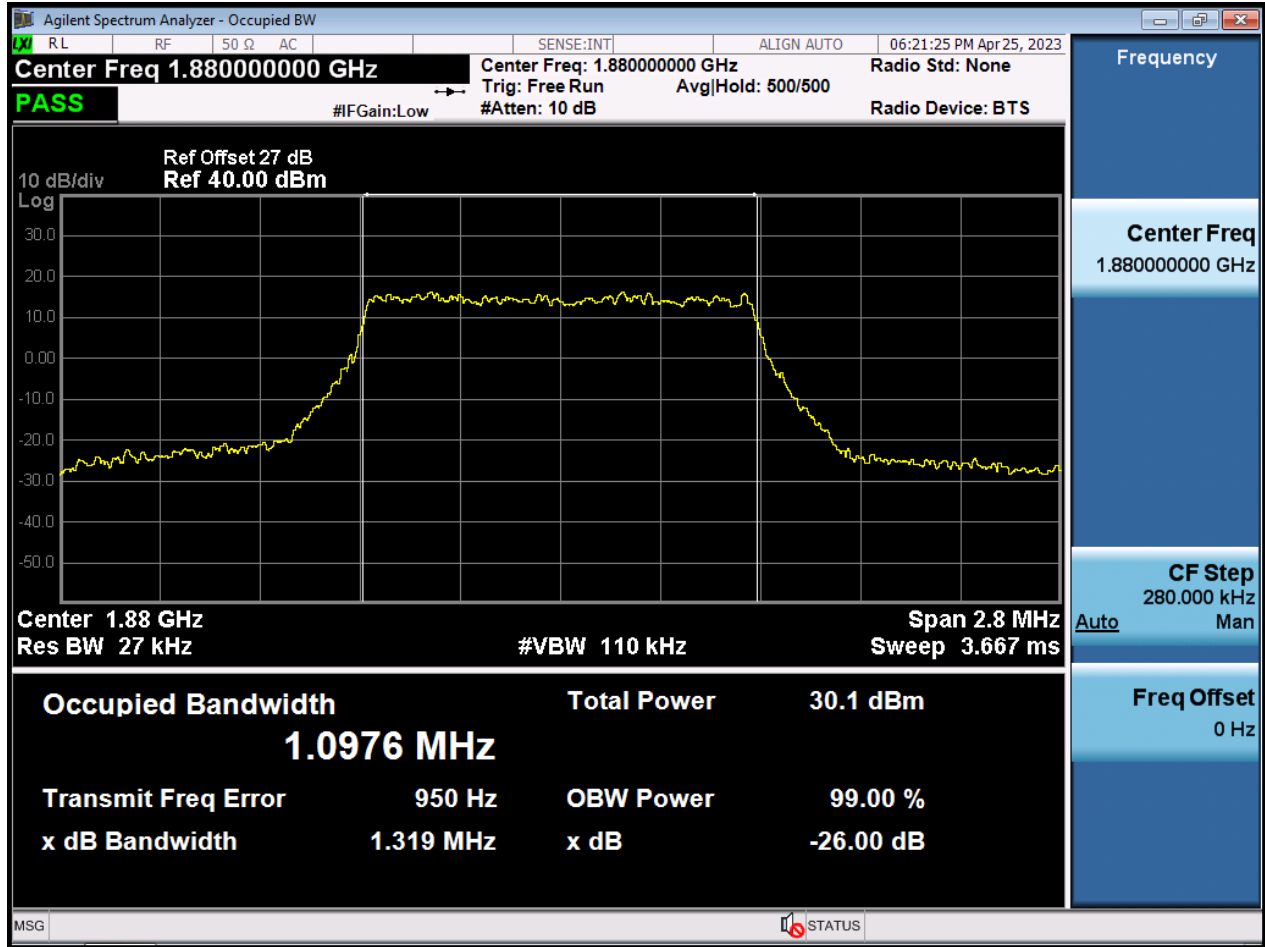


BW1.4 M_OBW_Middle Channel_64QAM_FullRB

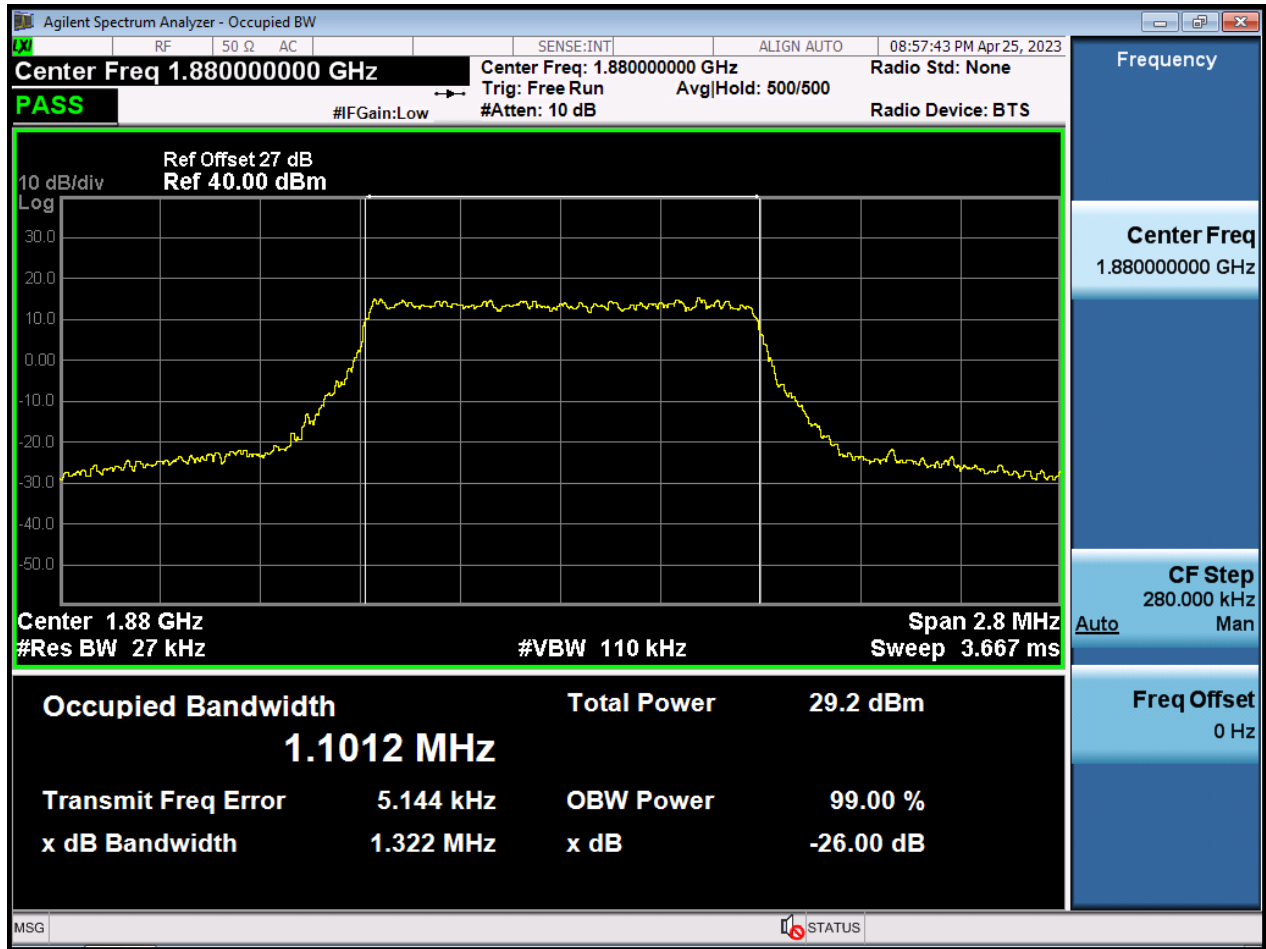


BW1.4 M_OBW_Middle Channel_256QAM_FullRB

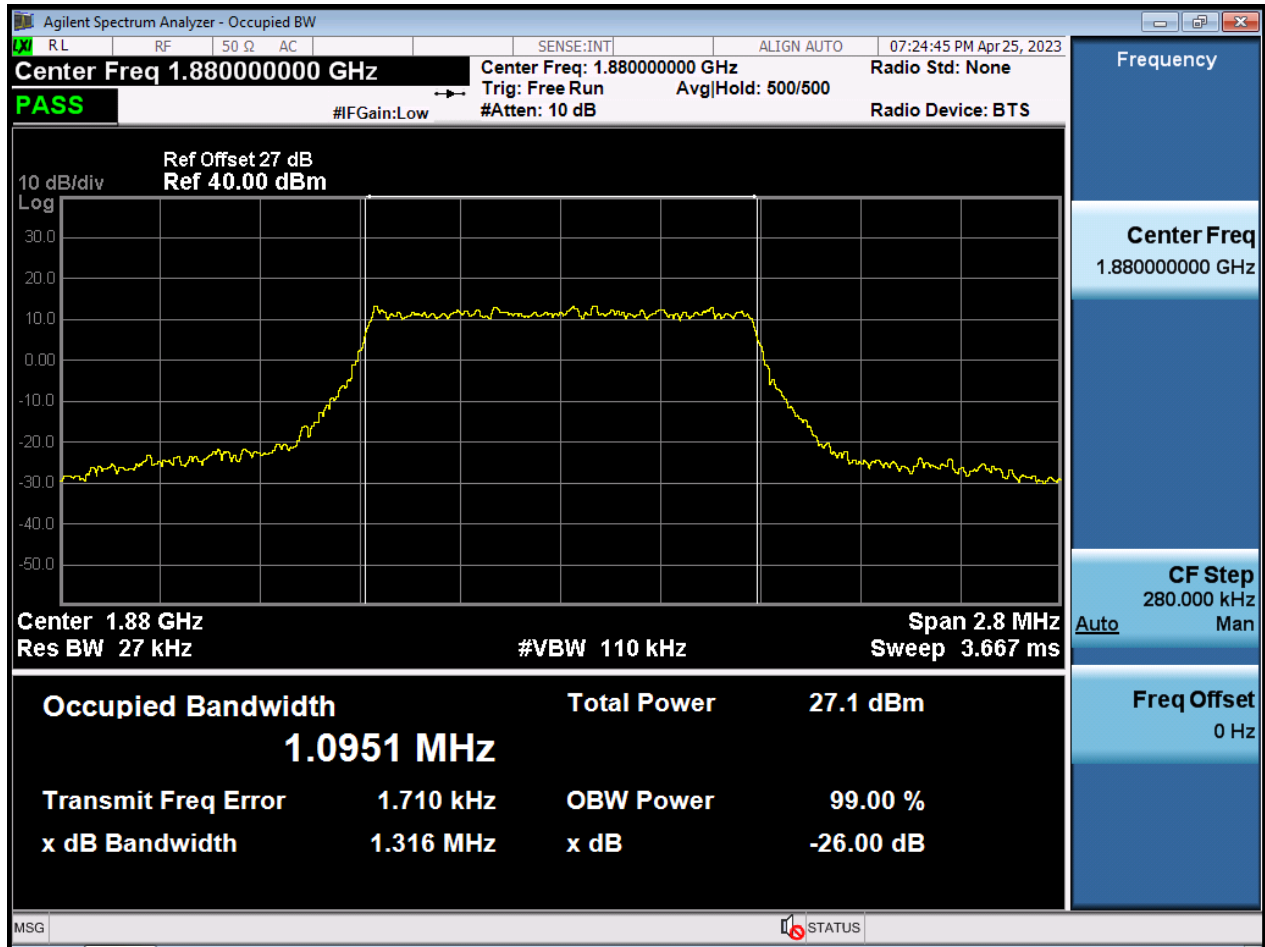


BW3 M_OBW_Middle Channel_QPSK_FullIRB

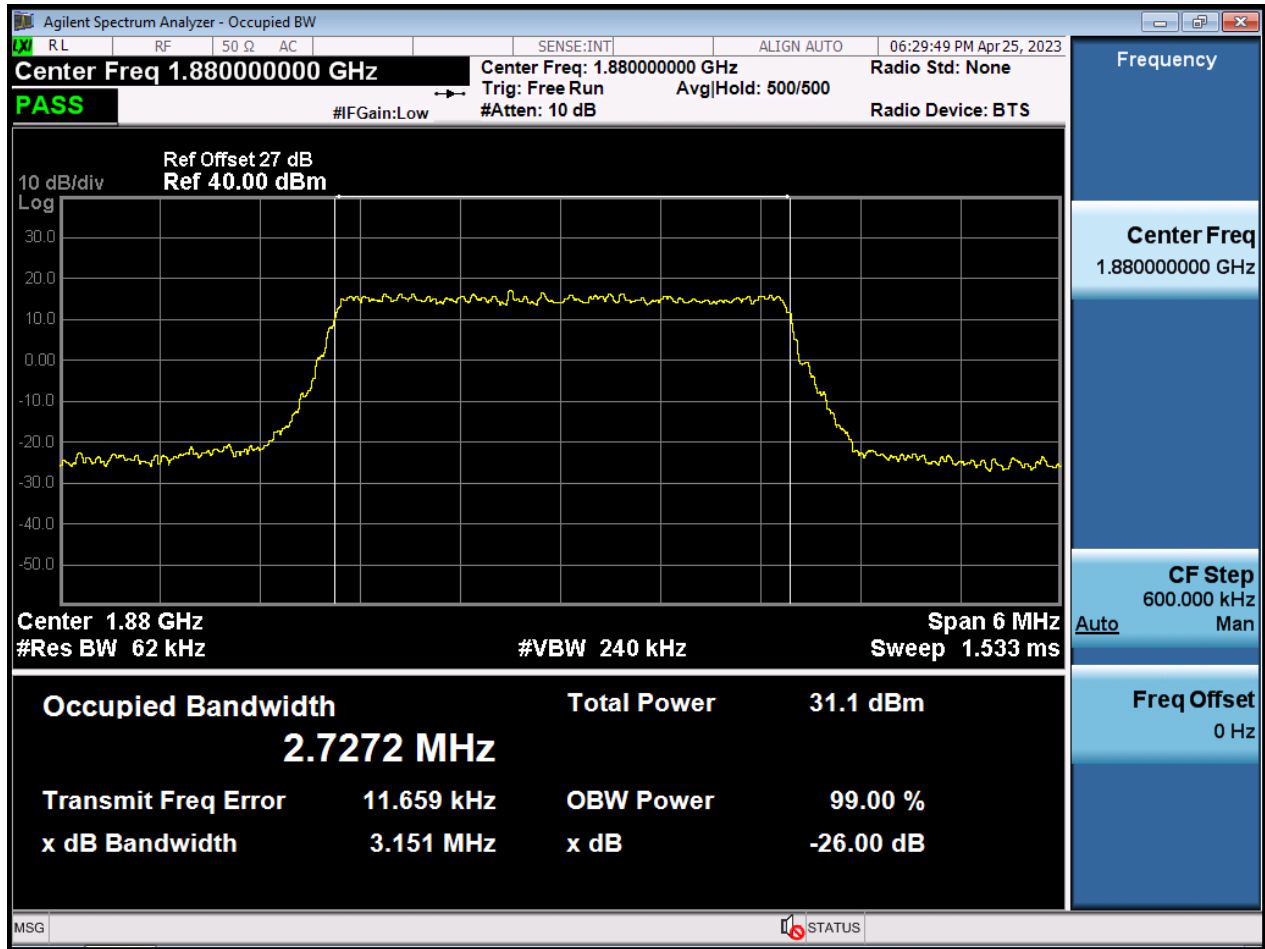


BW3 M_OBW_Middle Channel_16QAM_FullRB

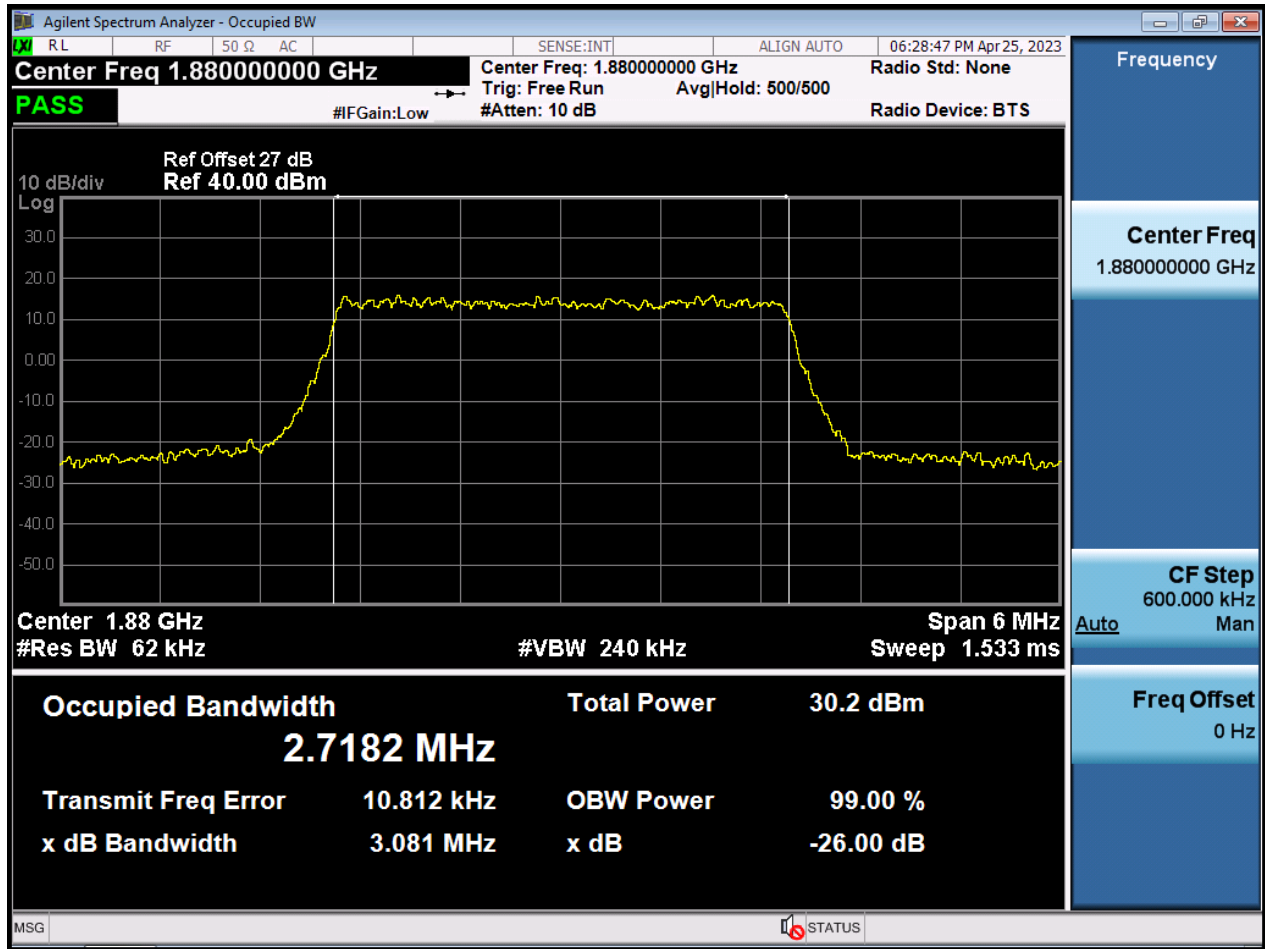


BW3 M_OBW_Middle Channel_64QAM_FullRB

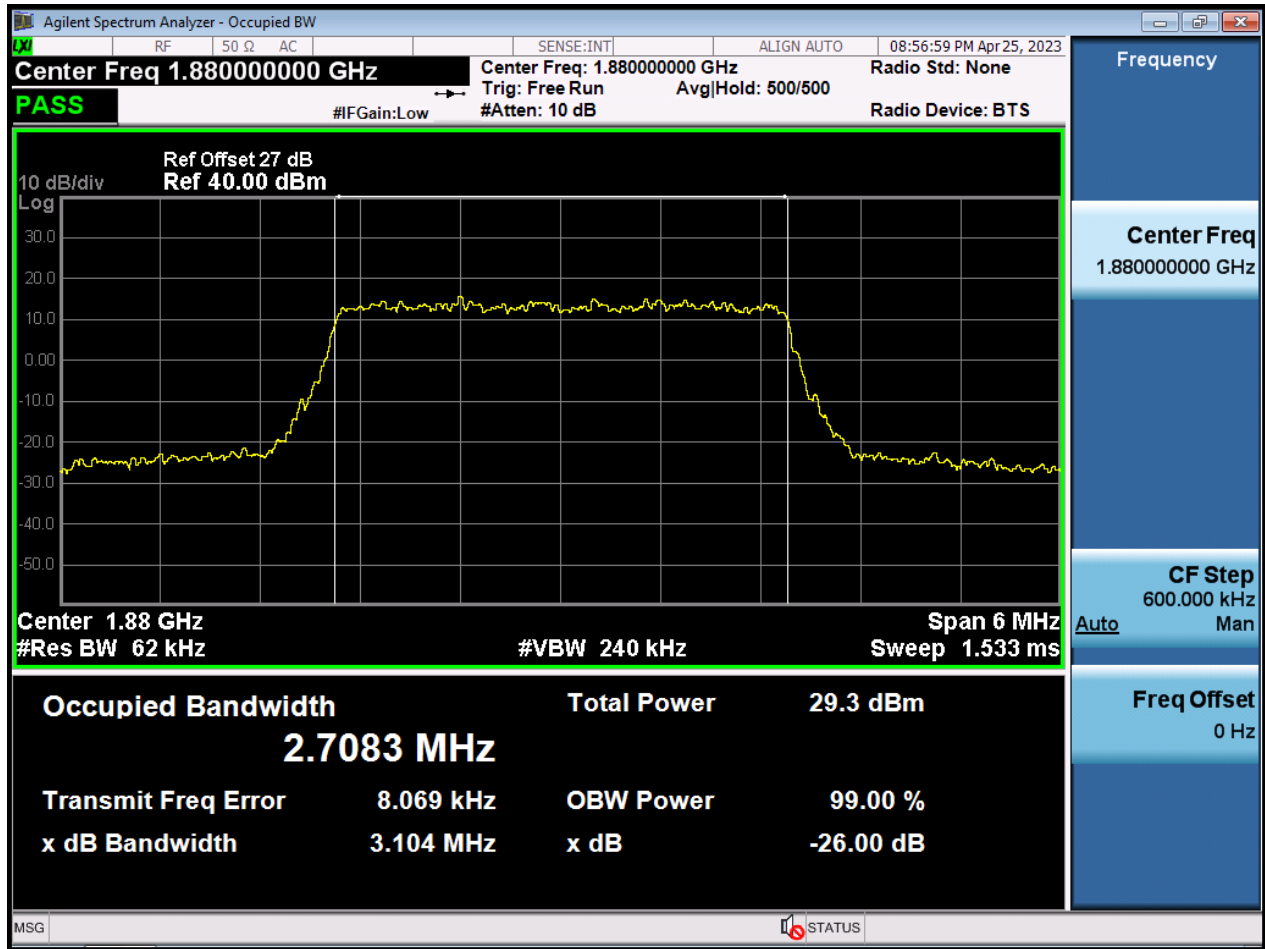


BW3 M_OBW_Middle Channel_256QAM_FullIRB

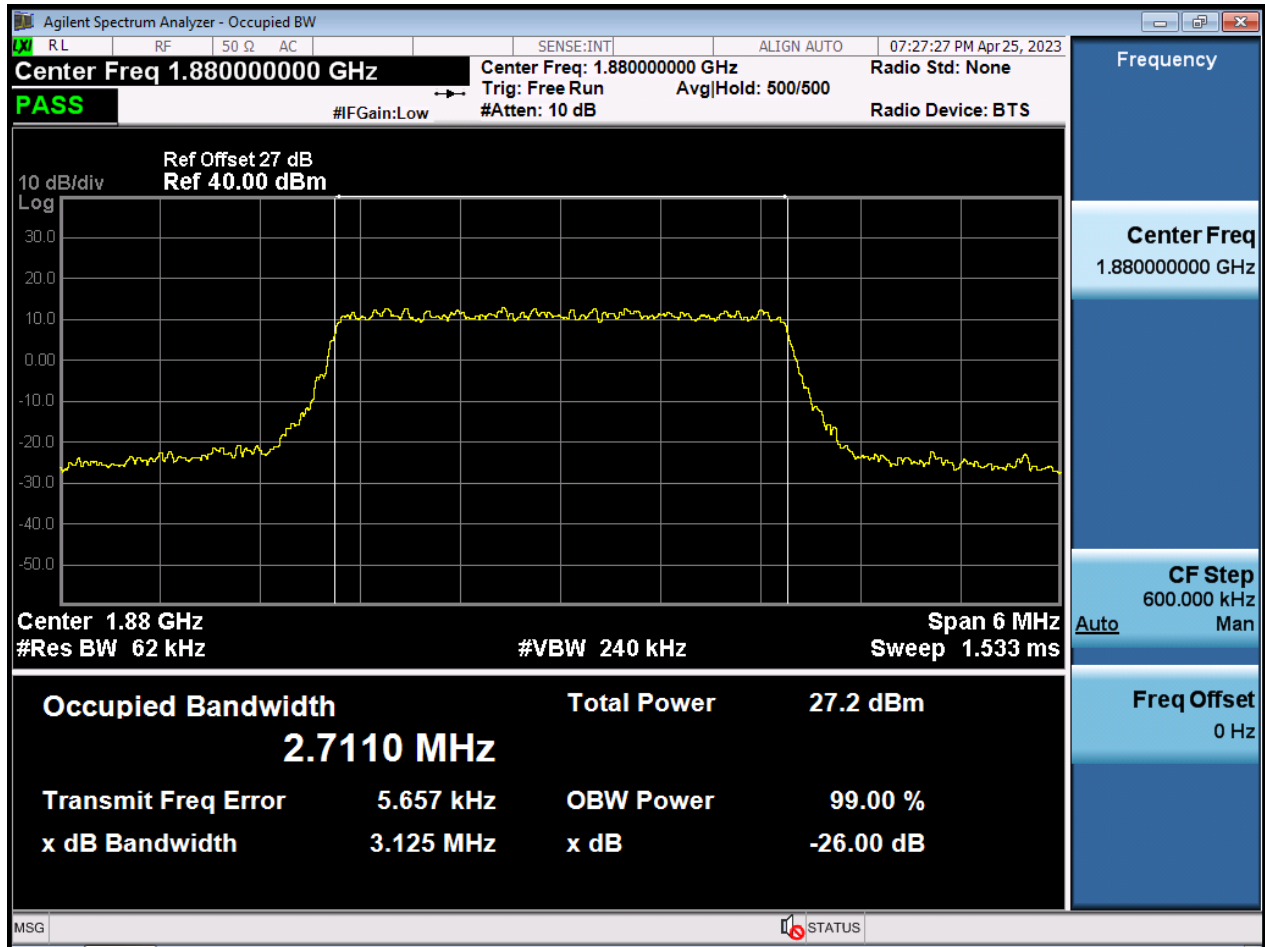


BW5 M_OBW_Middle Channel_QPSK_FullIRB

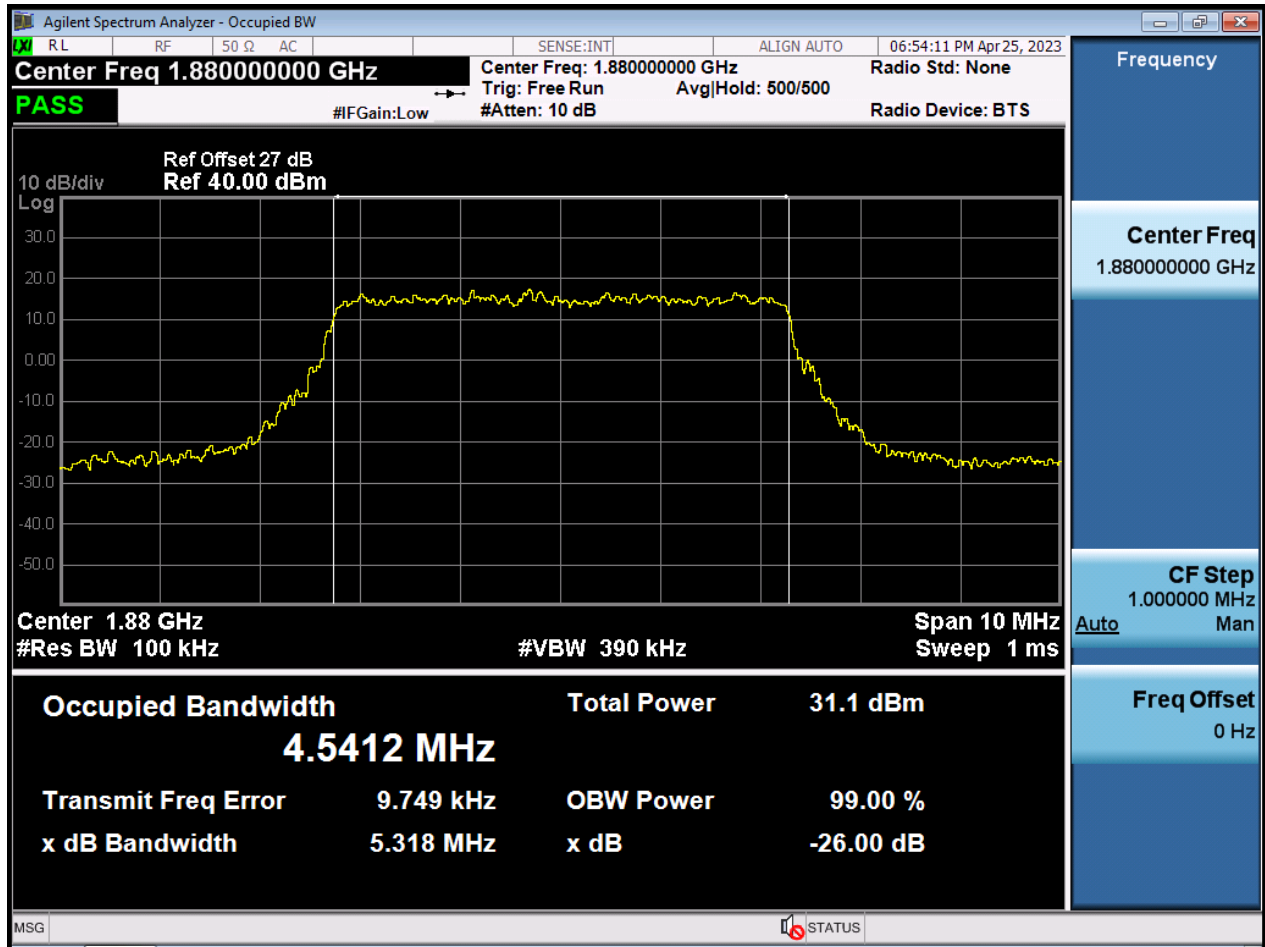


BW5 M_OBW_Middle Channel_16QAM_FullRB

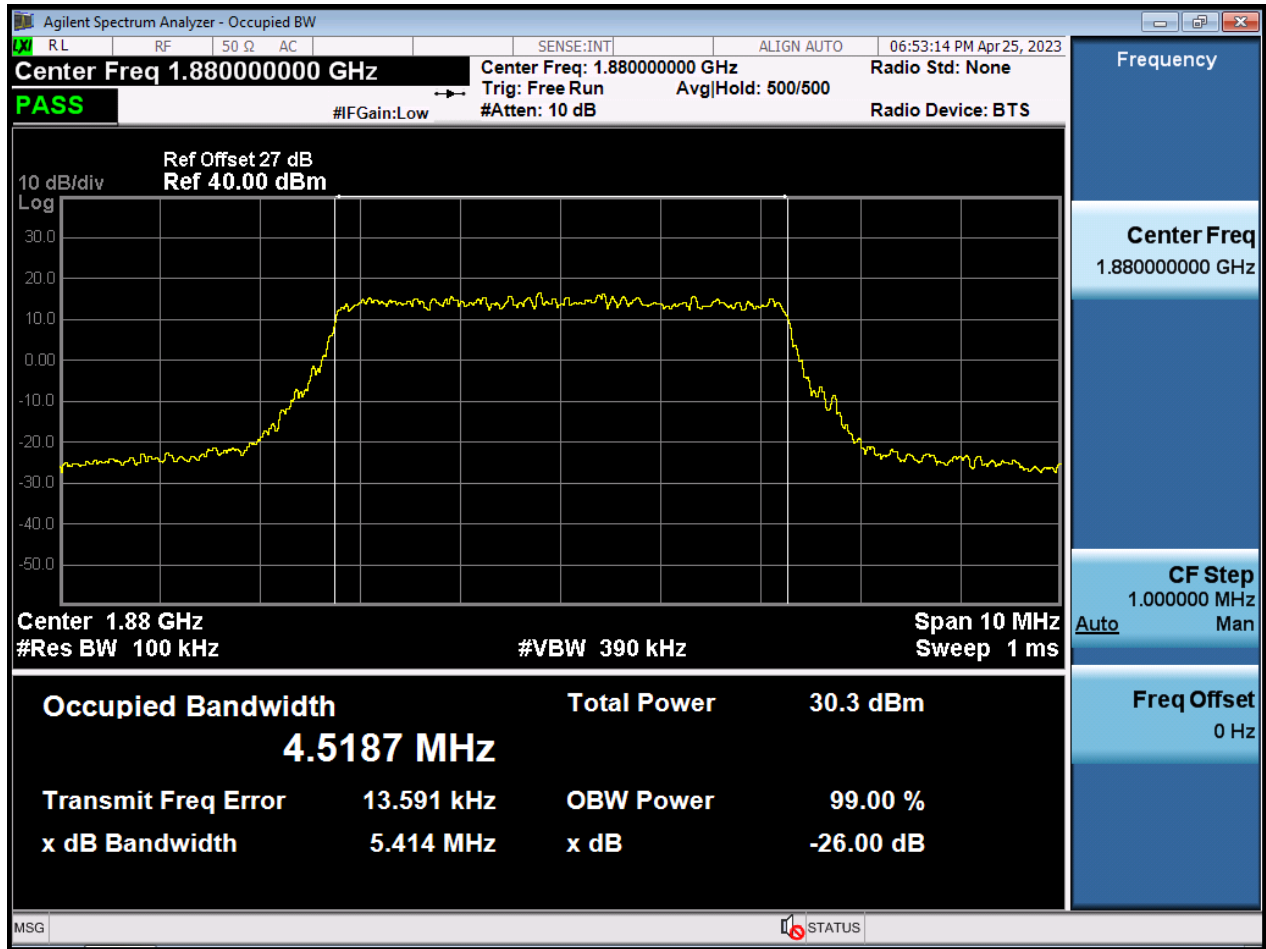


BW5 M_OBW_Middle Channel_64QAM_FullRB

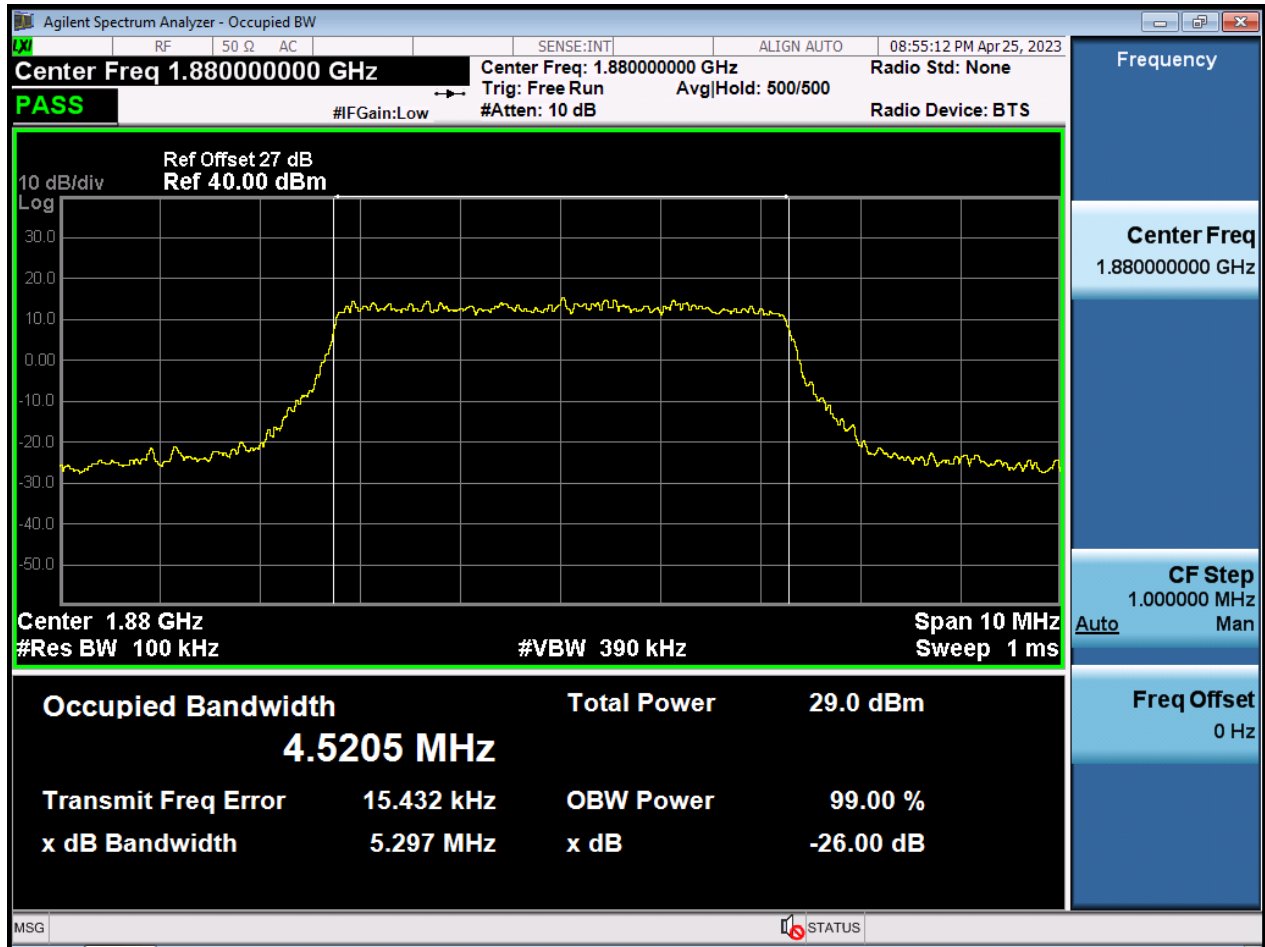


BW5 M_OBW_Middle Channel_256QAM_FullIRB

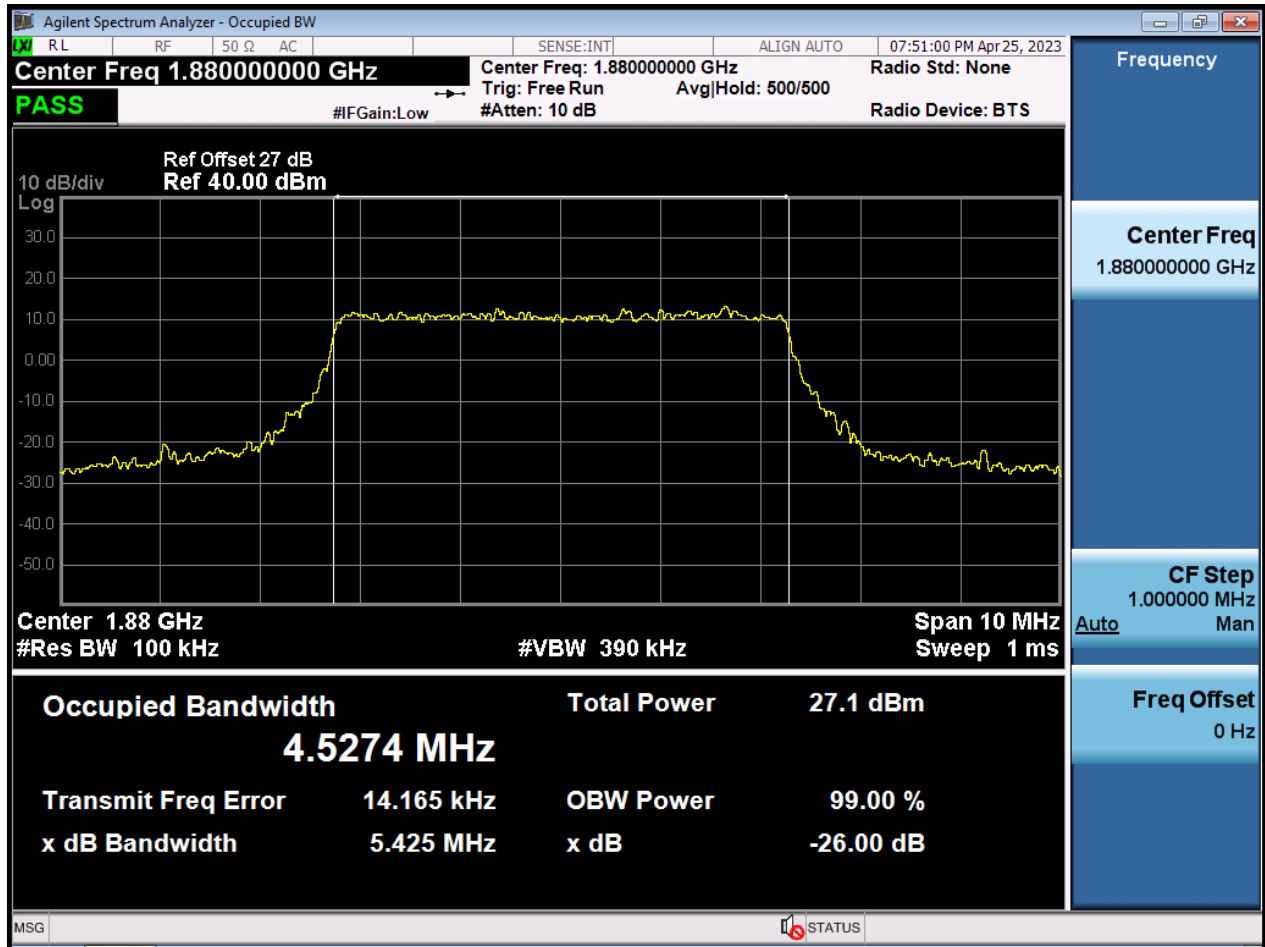


BW10 M_OBW_Middle Channel_QPSK_FullRB

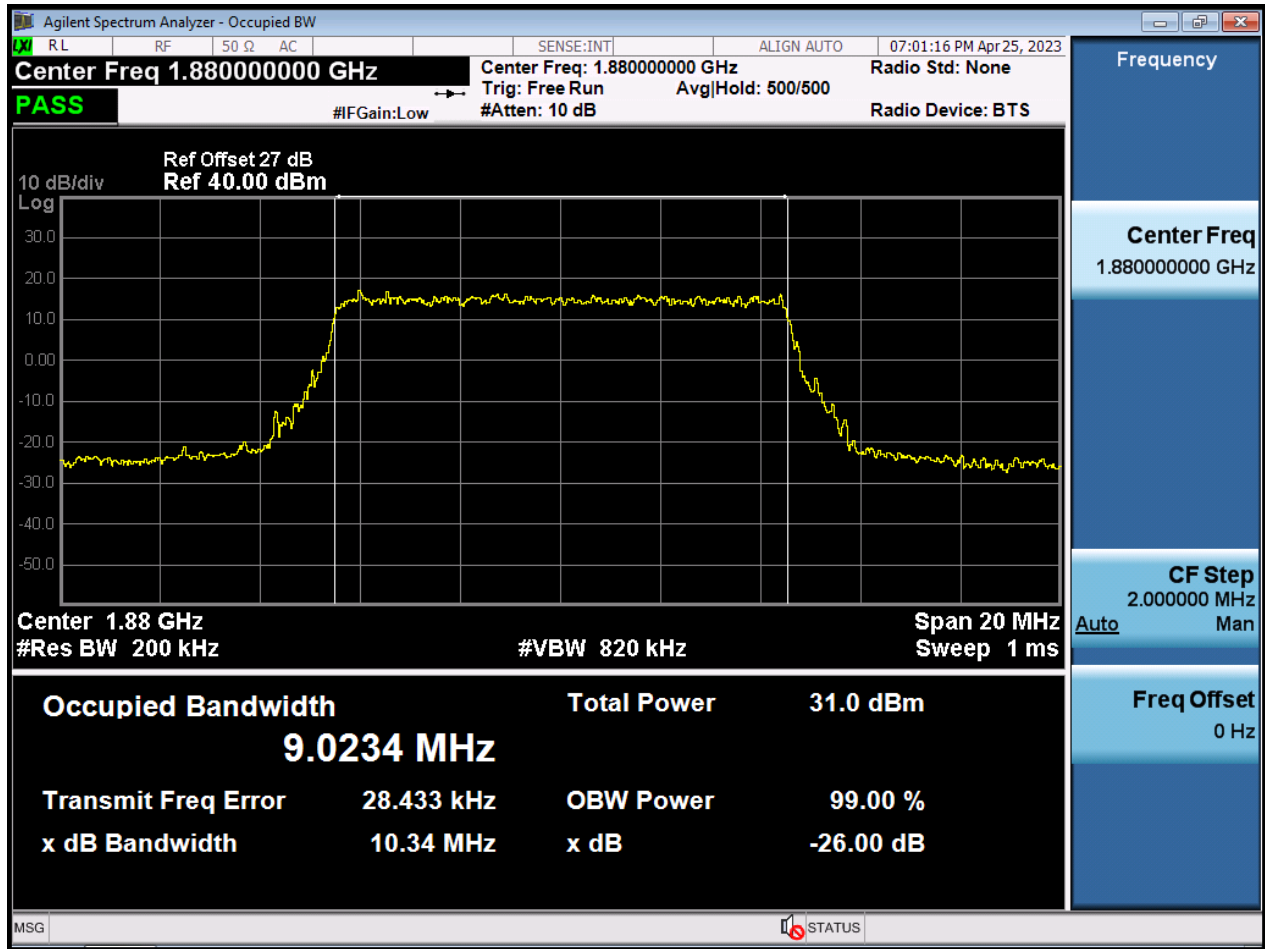


BW10 M_OBW_Middle Channel_16QAM_FullIRB

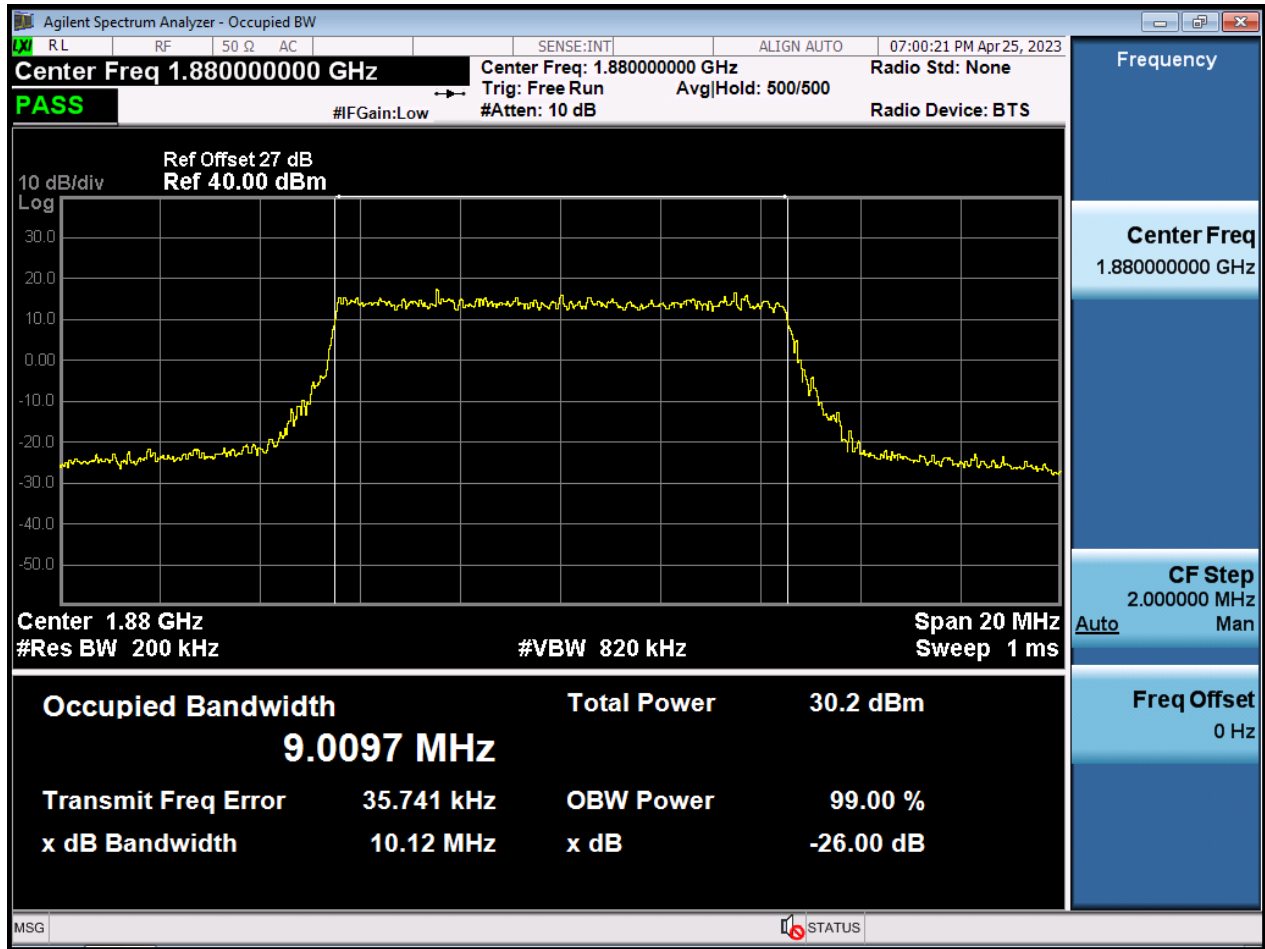


BW10 M_OBW_Middle Channel_64QAM_FullIRB

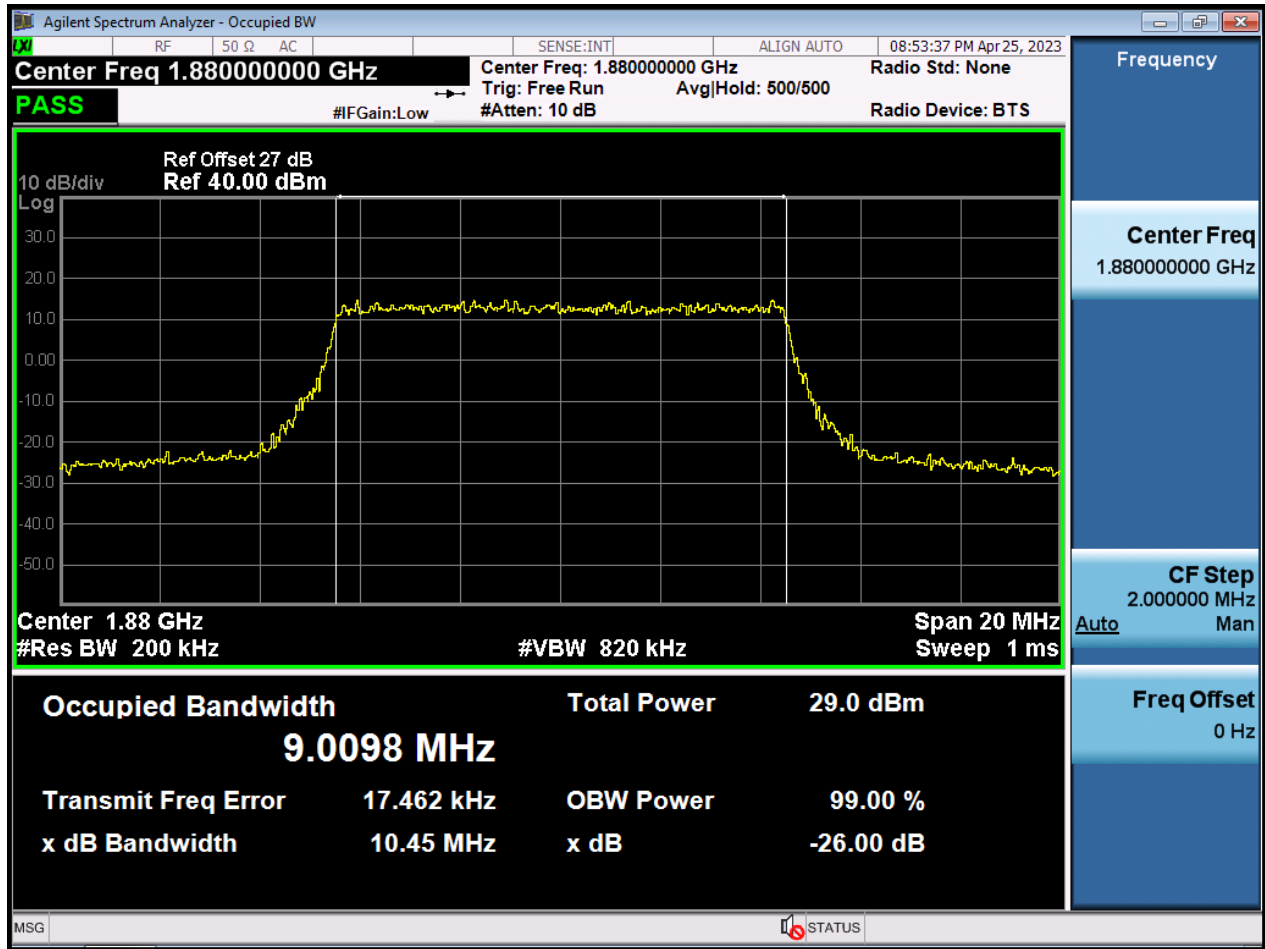


BW10 M_OBW_Middle Channel_256QAM_FullIRB

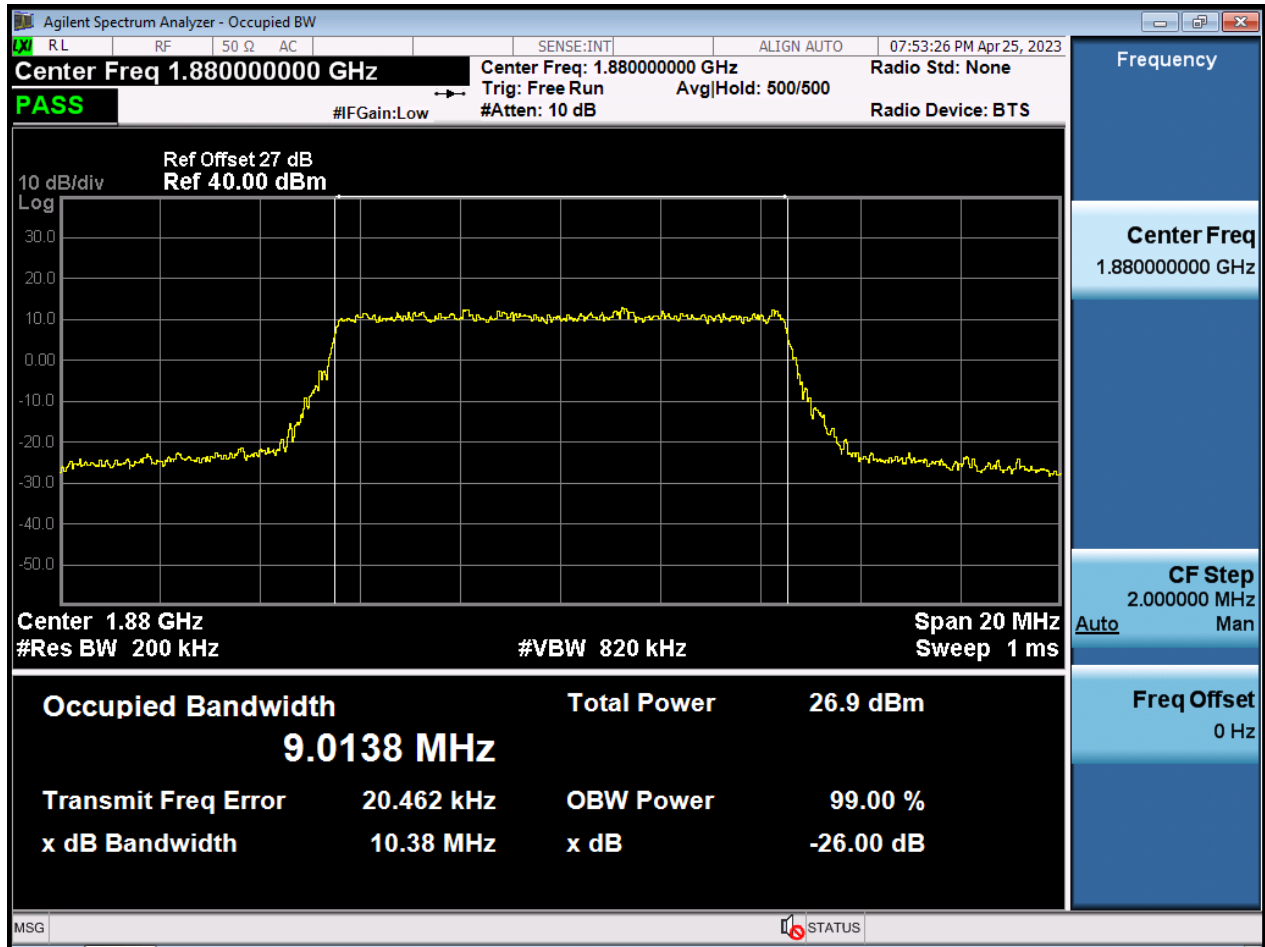


BW15 M_OBW_Middle Channel_QPSK_FullRB

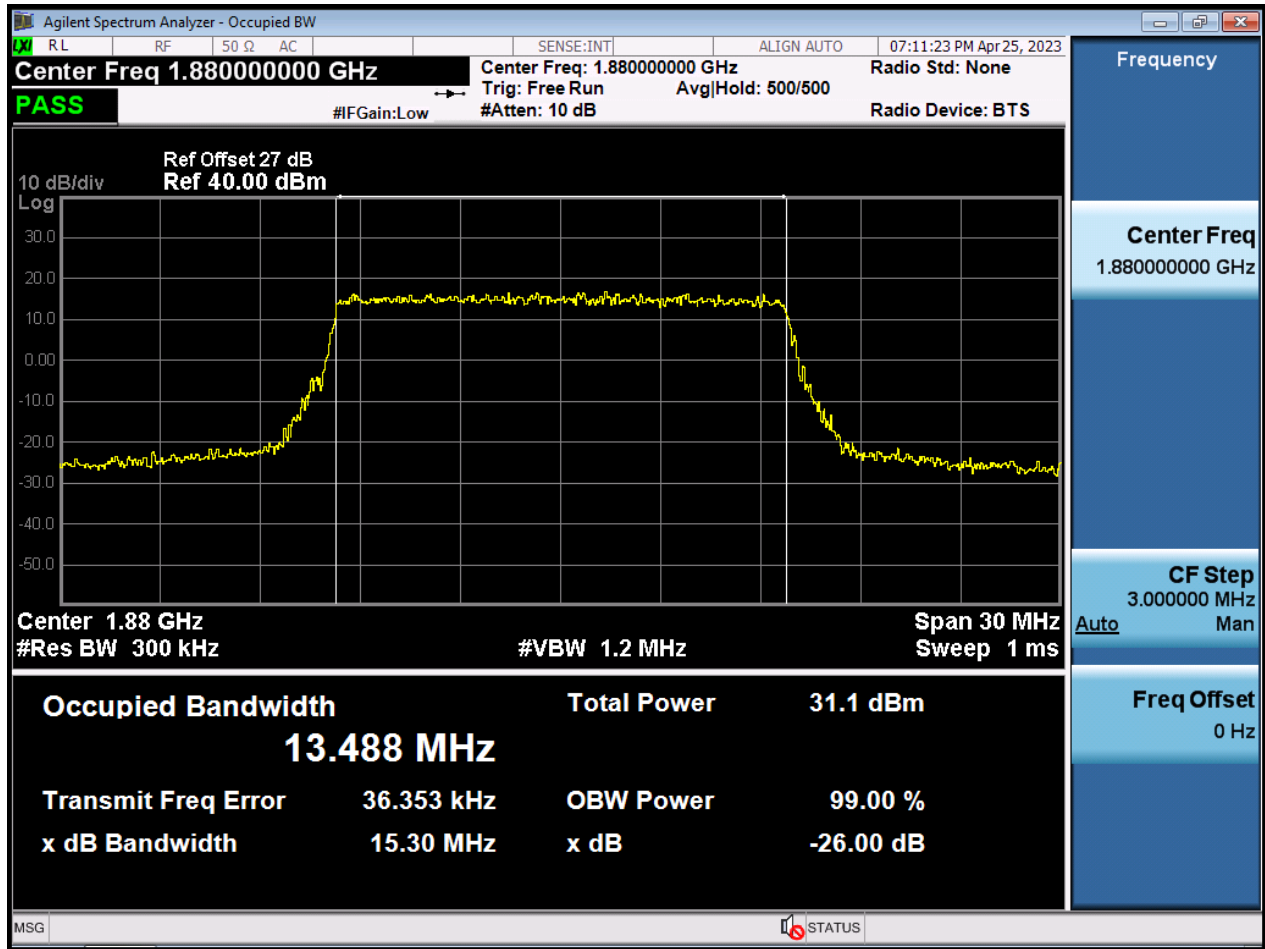


BW15 M_OBW_Middle Channel_16QAM_FullIRB

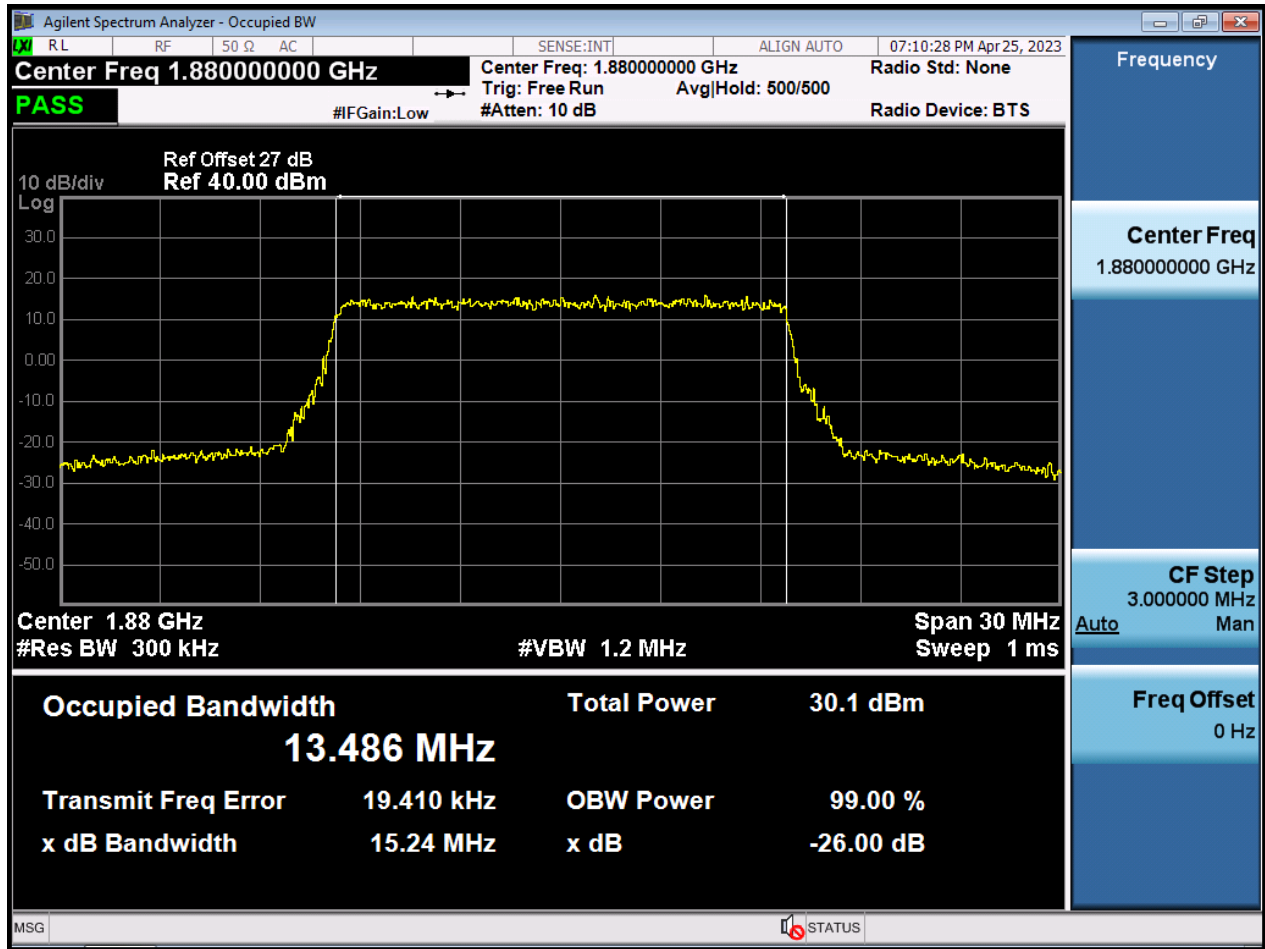


BW15 M_OBW_Middle Channel_64QAM_FullIRB

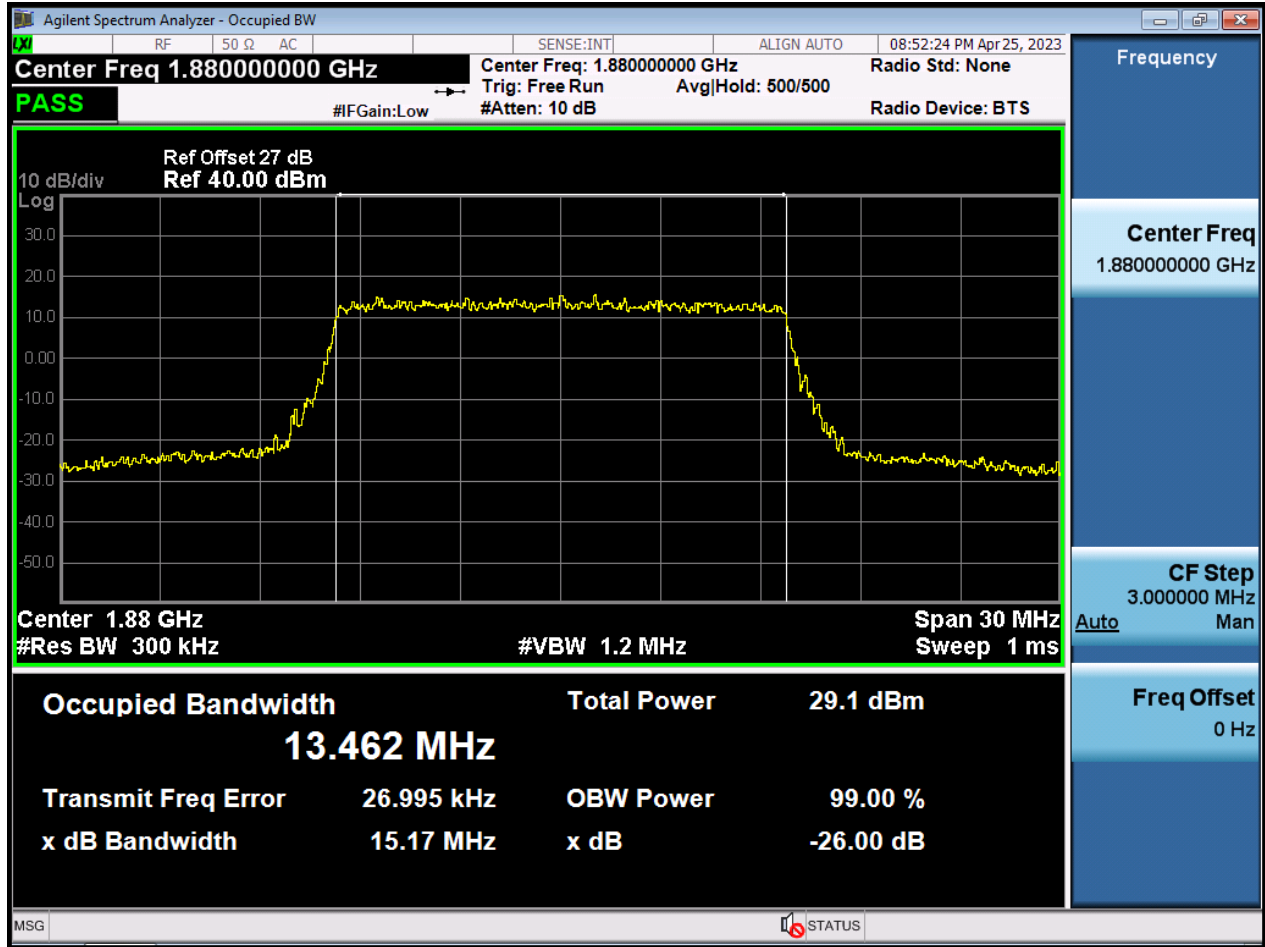


BW15 M_OBW_Middle Channel_256QAM_FullRB

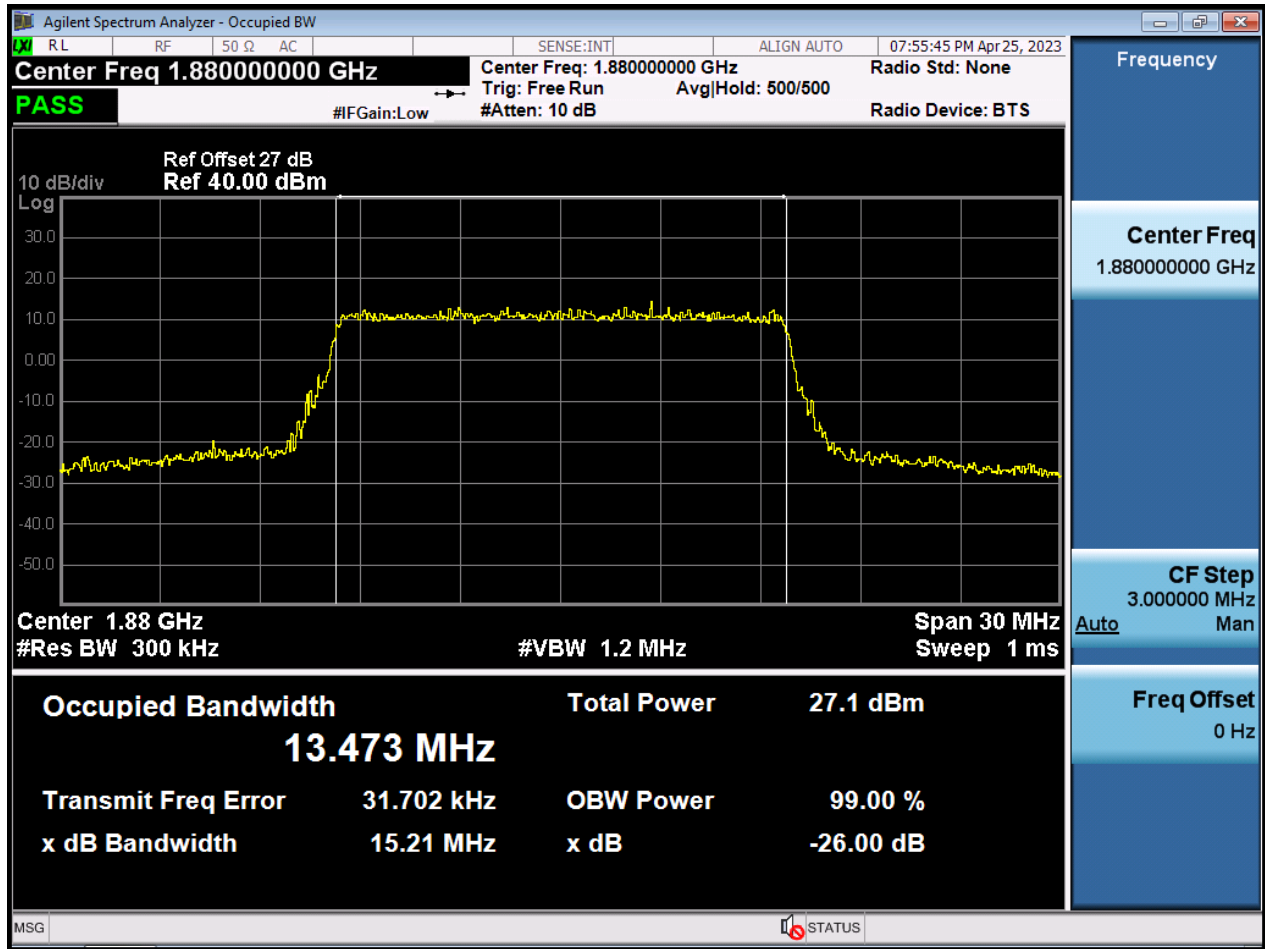


BW20 M_OBW_Middle Channel_QPSK_FullRB

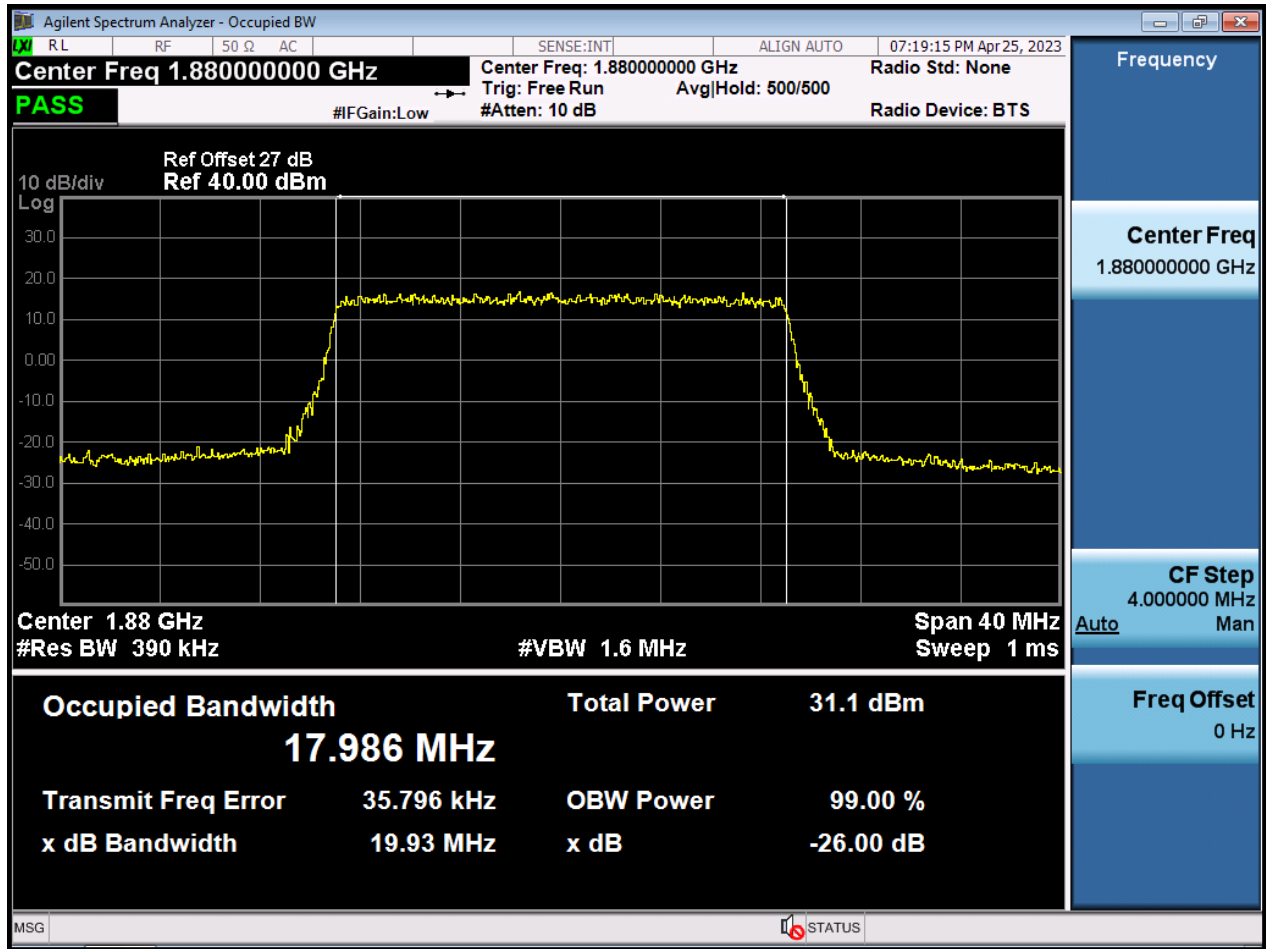


BW20 M_OBW_Middle Channel_16QAM_FullIRB

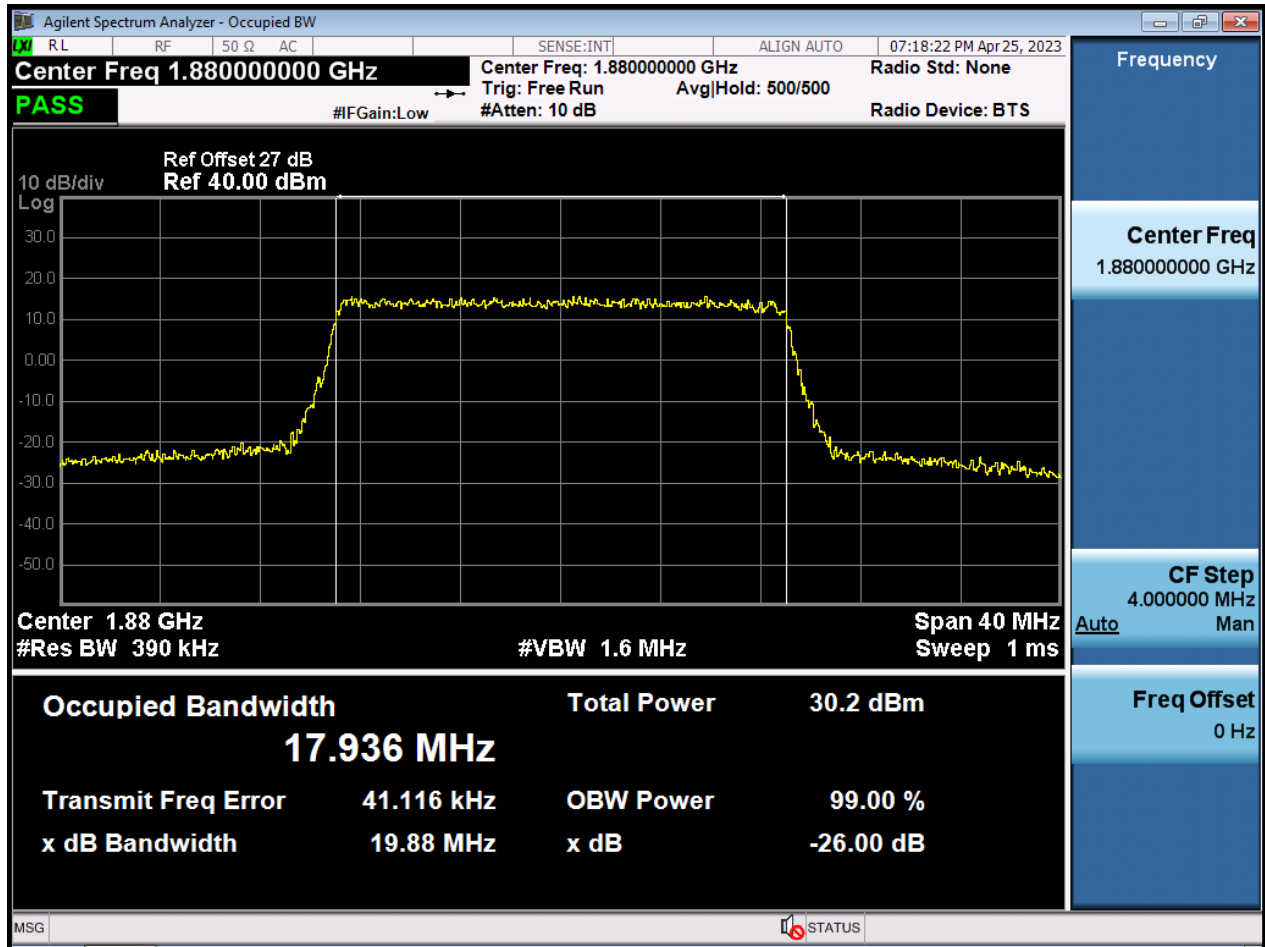


BW20 M_OBW_Middle Channel_64QAM_FullIRB

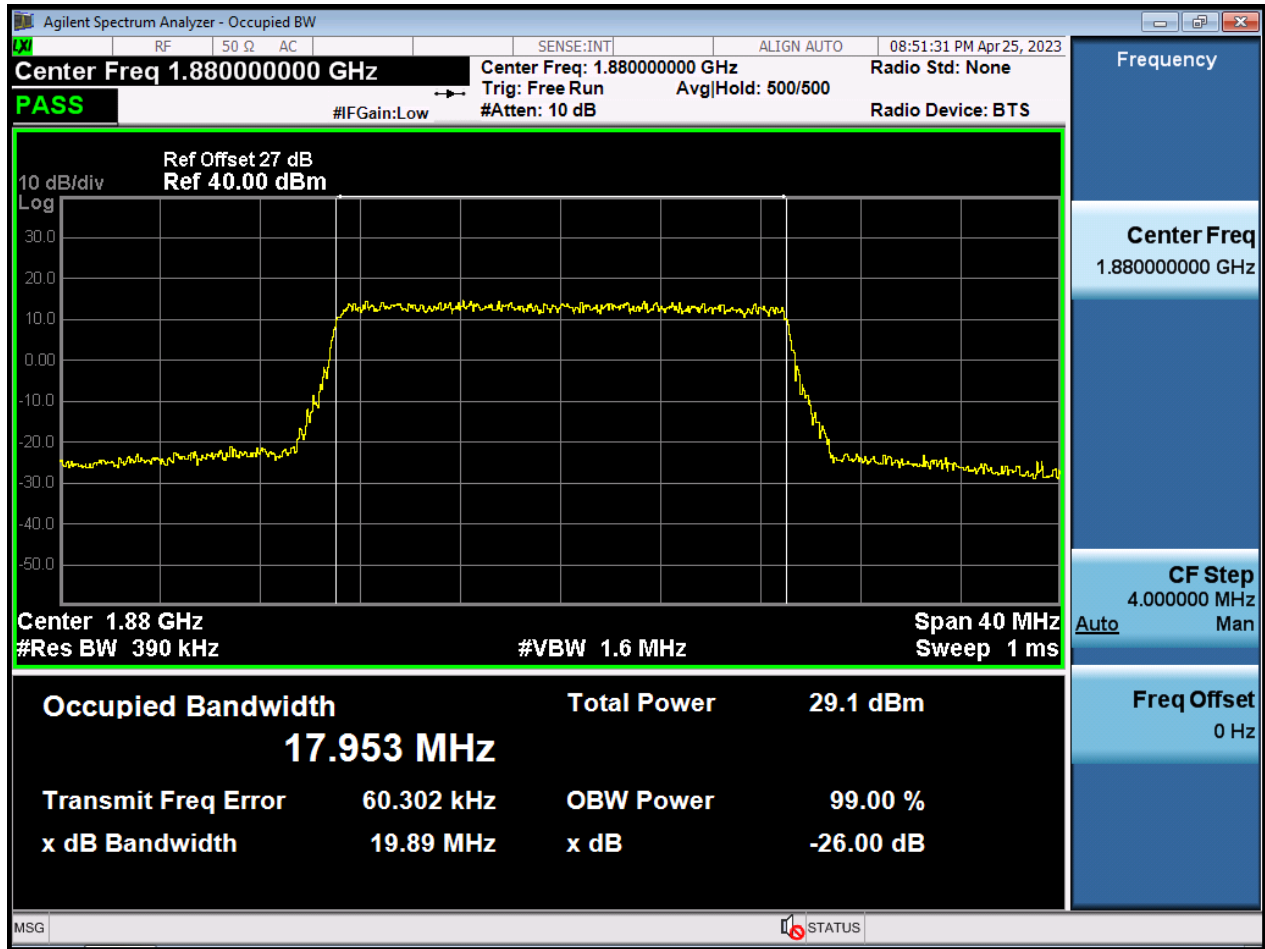


BW20 M_OBW_Middle Channel_256QAM_FullIRB

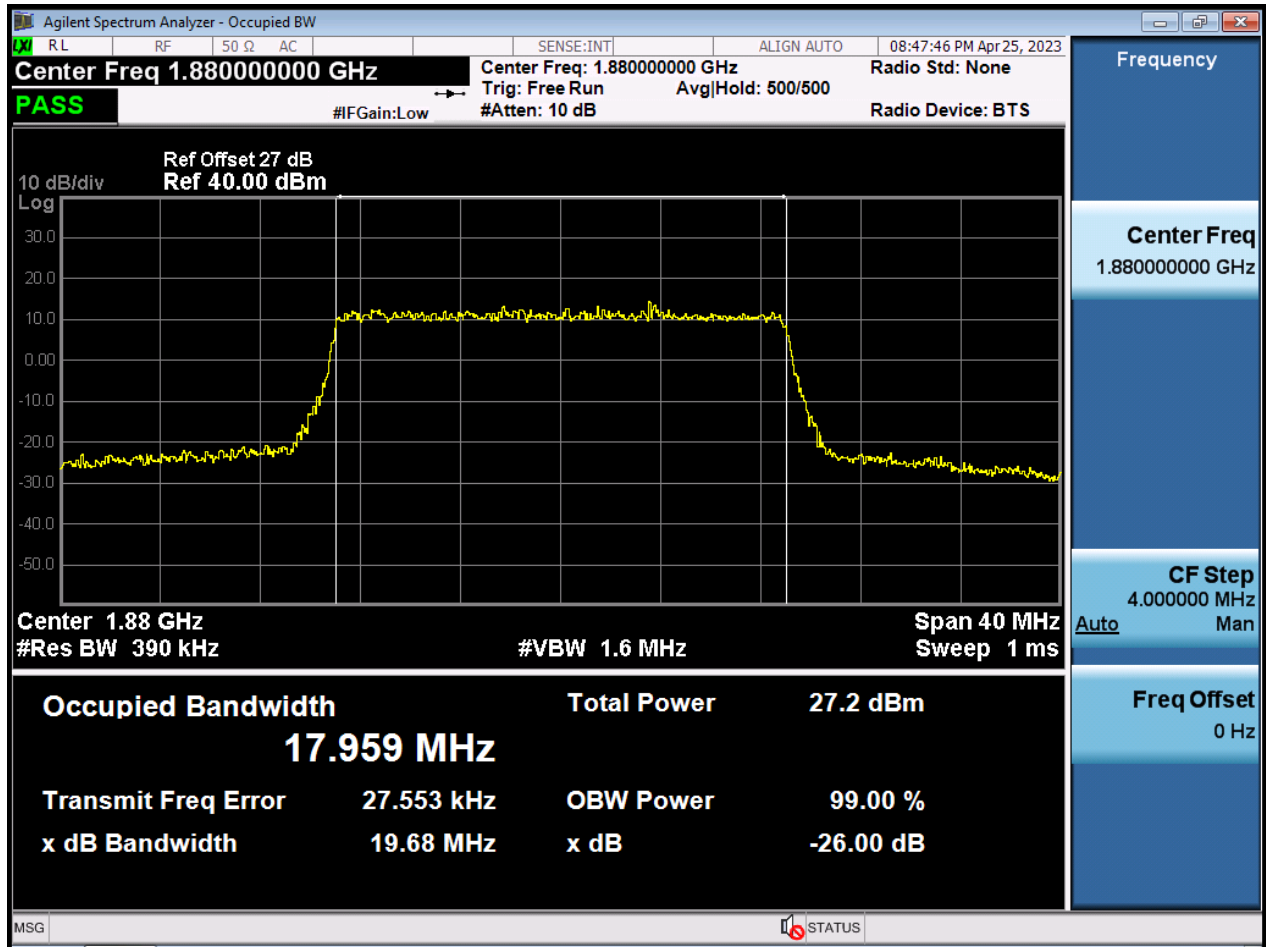


BW1.4 M_PAR_Middle Channel_QPSK_FullIRB

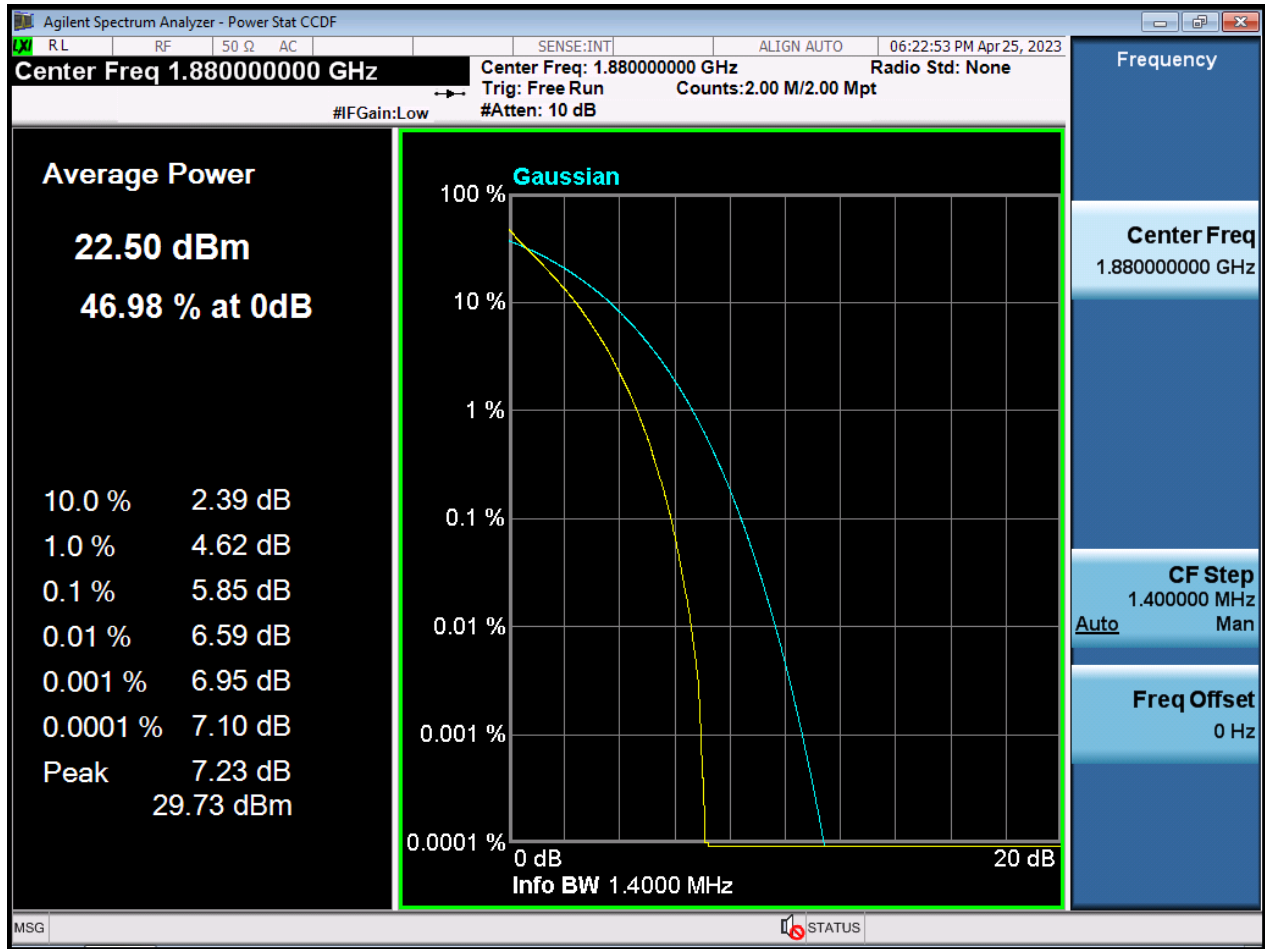


BW1.4 M_PAR_Middle Channel_16QAM_FullIRB

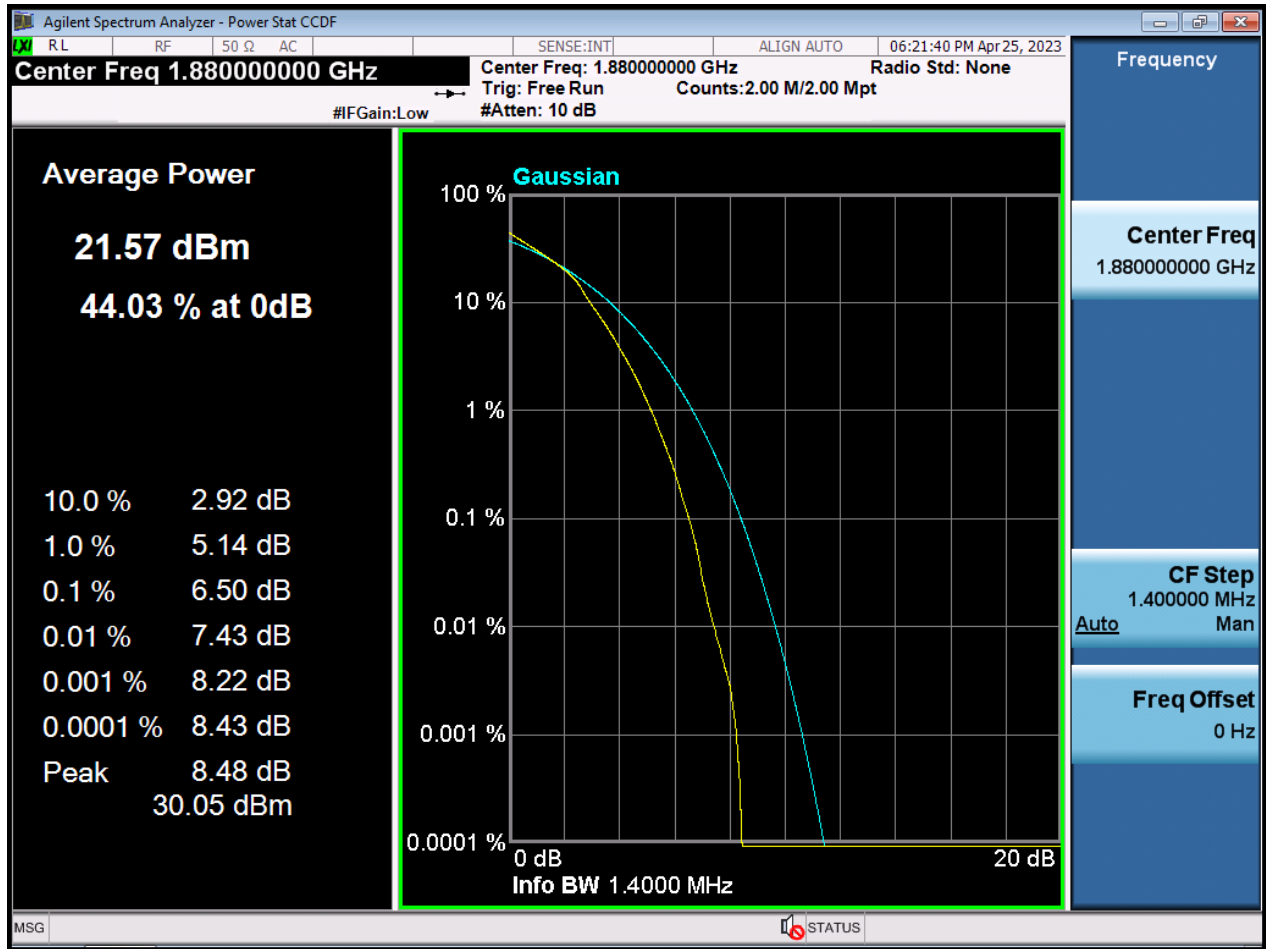


BW1.4 M_PAR_Middle Channel_64QAM_FullIRB

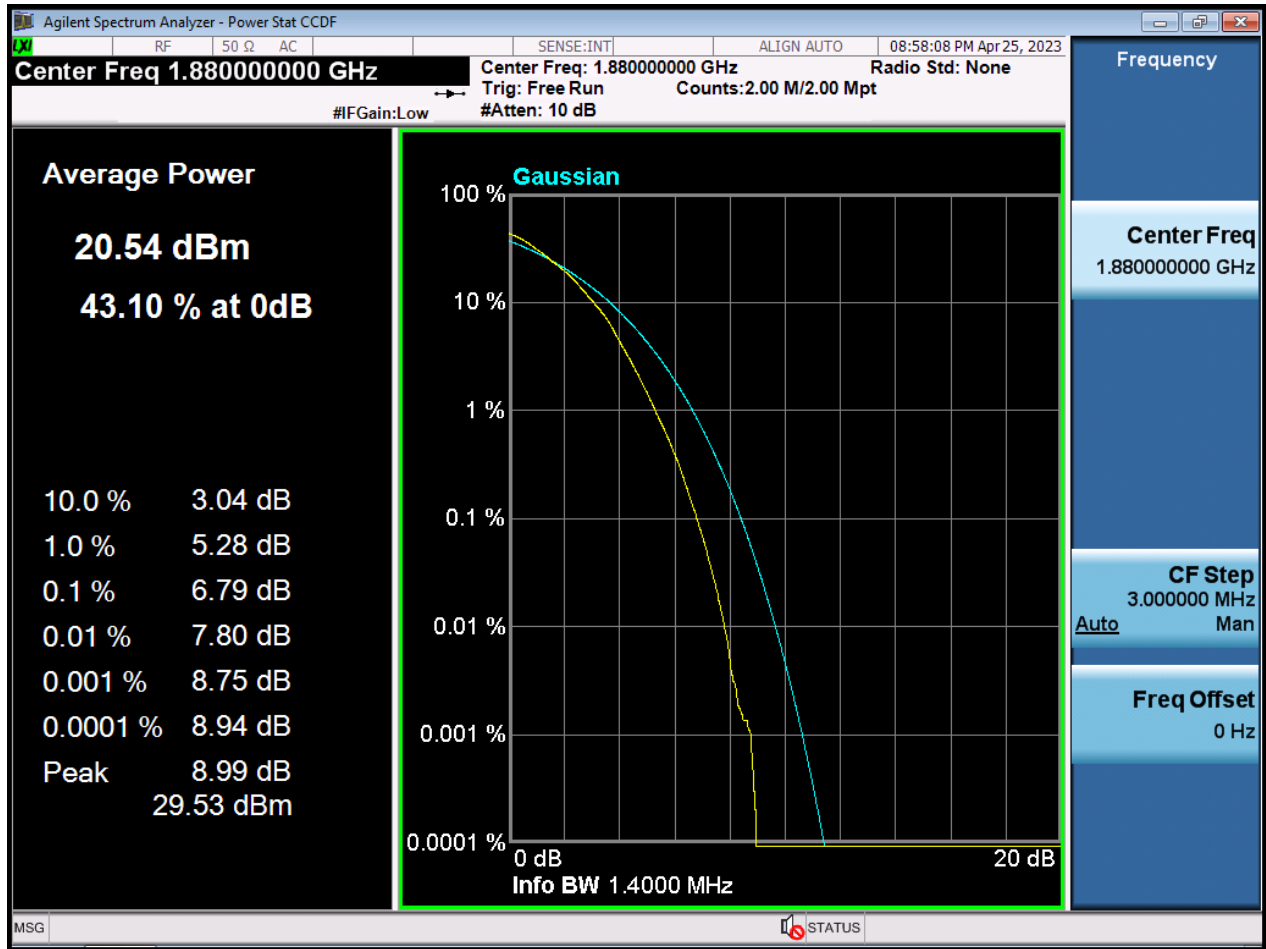


BW1.4 M_PAR_Middle Channel_256QAM_FullRB

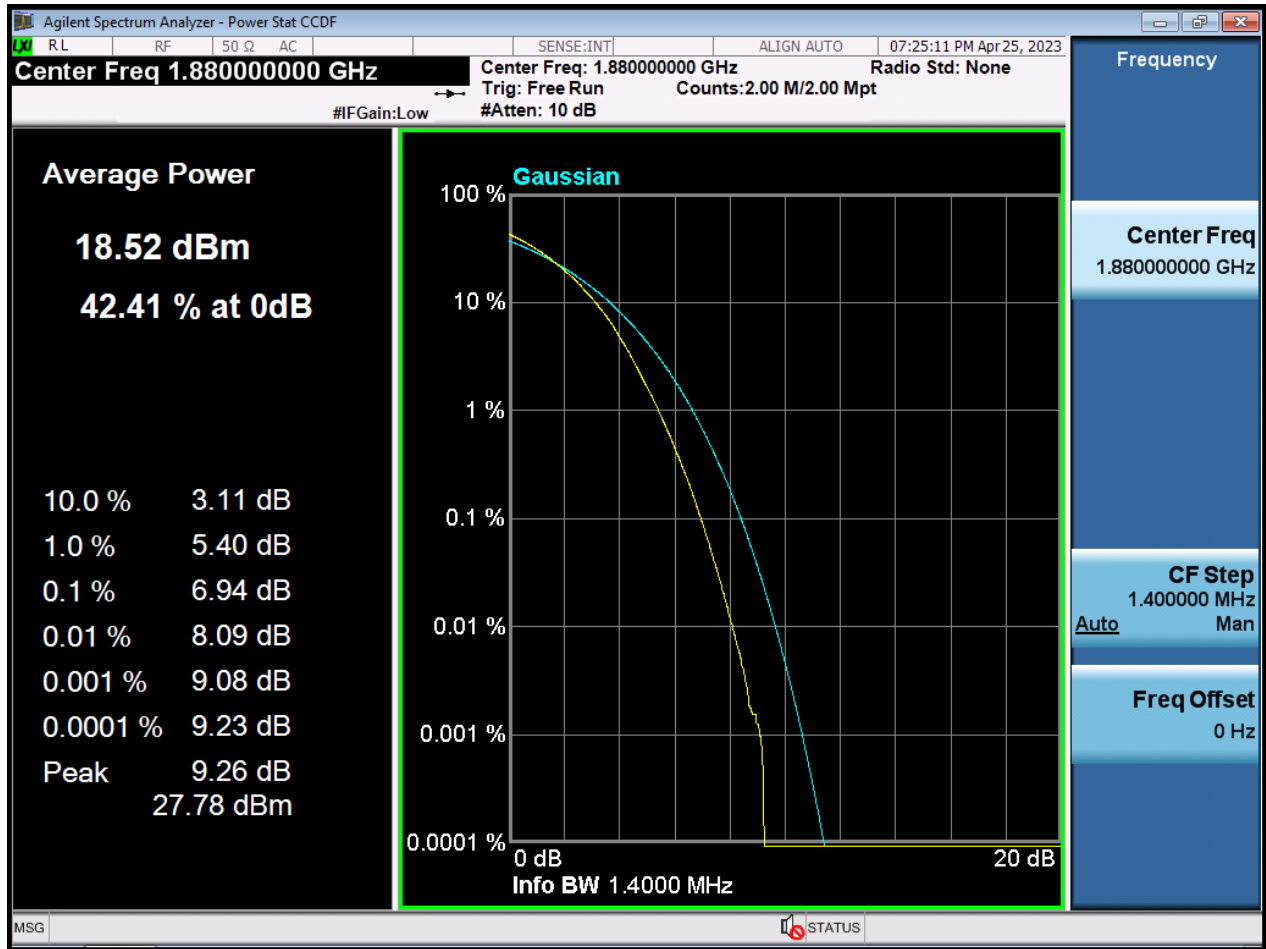


BW3 M_PAR_Middle Channel_QPSK_FullIRB

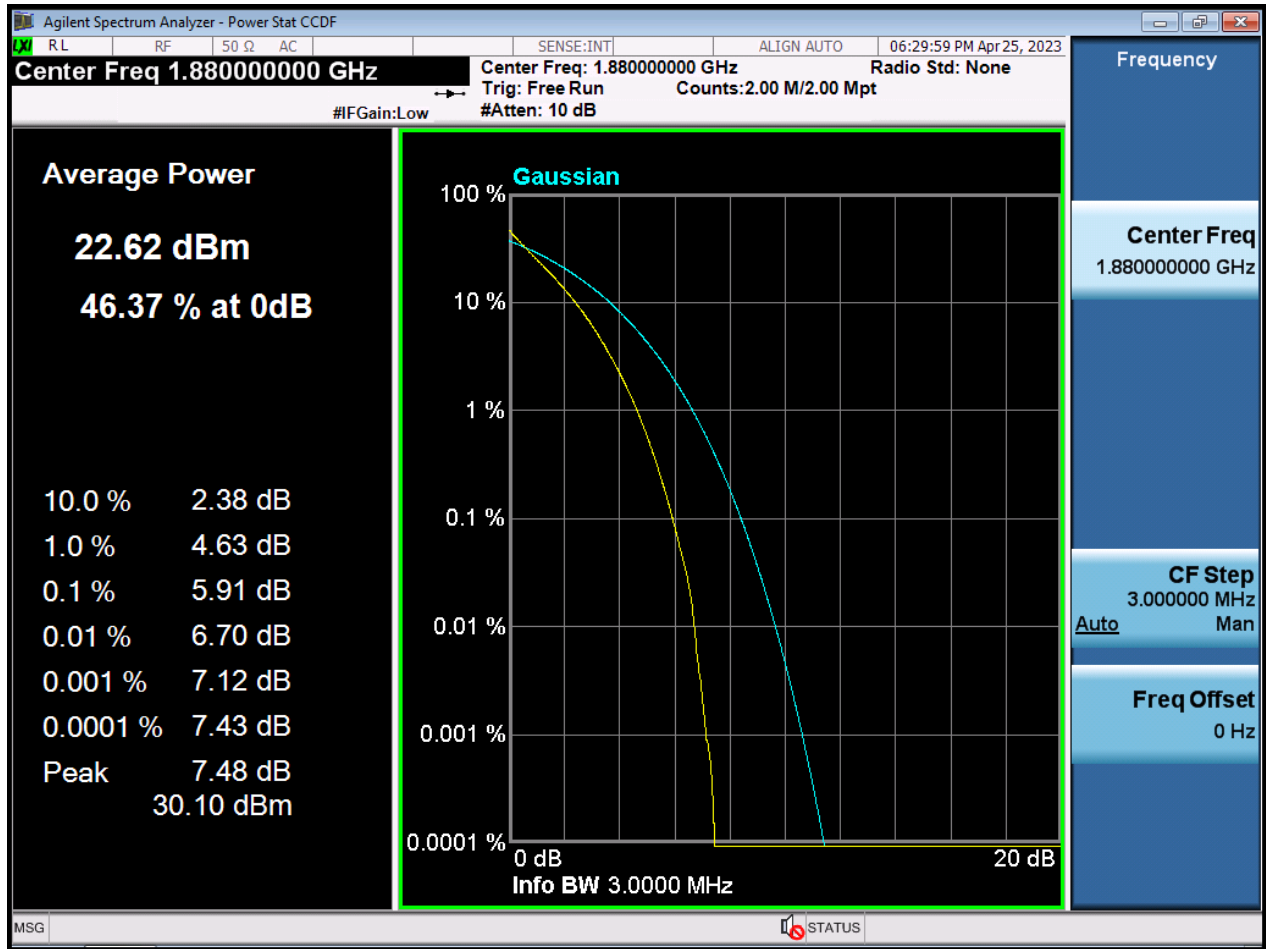


BW3 M_PAR_Middle Channel_16QAM_FullRB

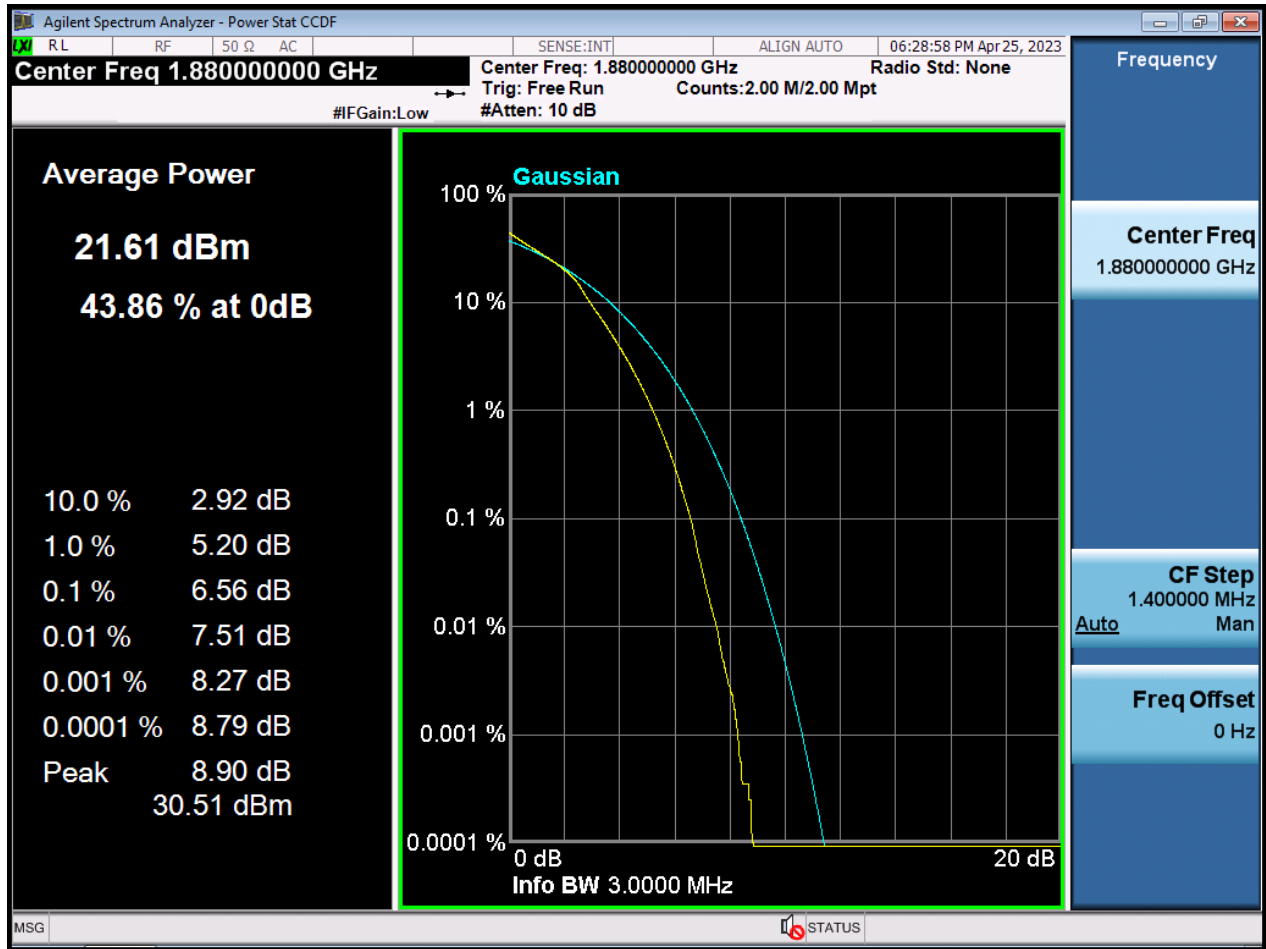


BW3 M_PAR_Middle Channel_64QAM_FullRB

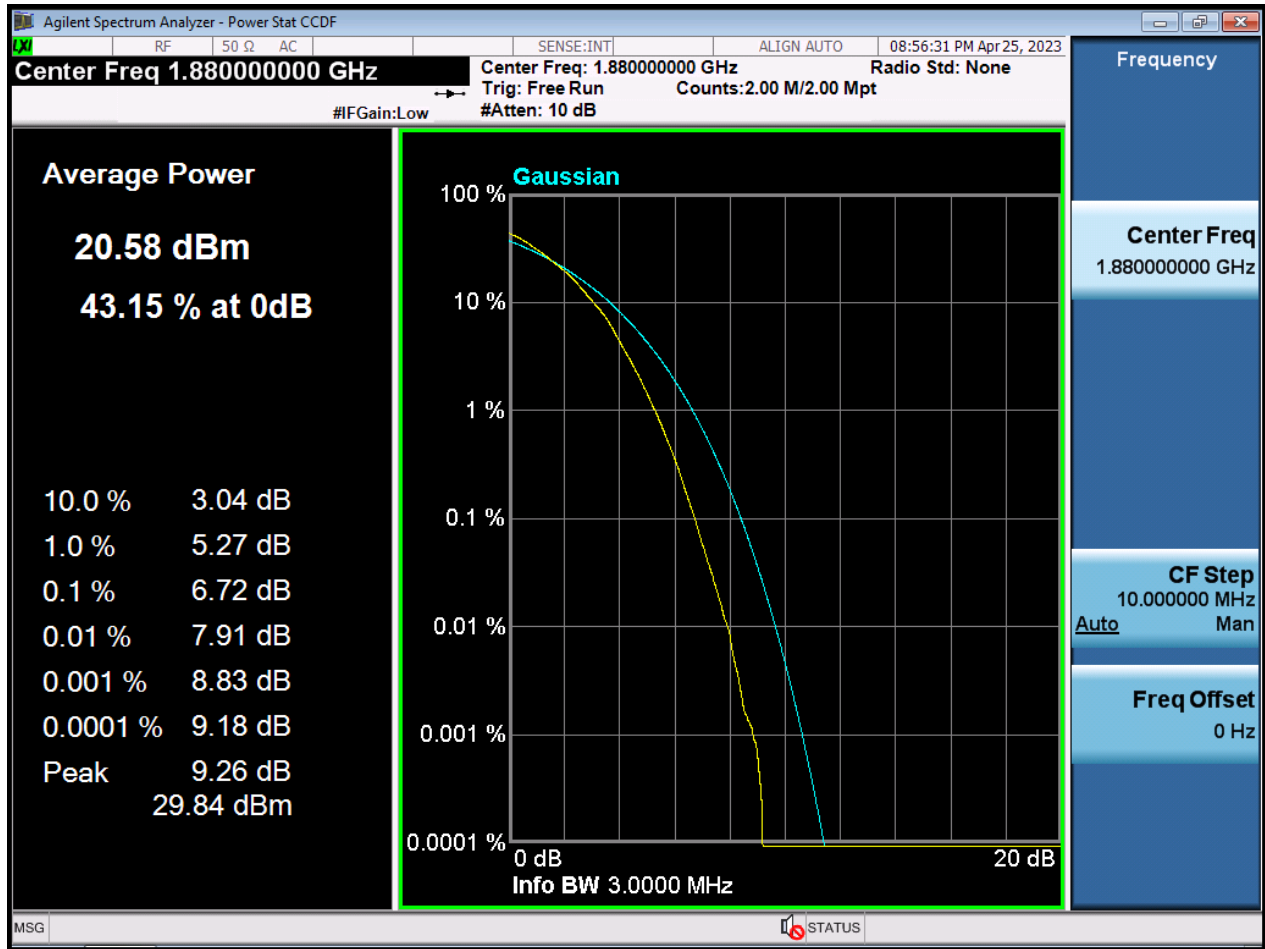


BW3 M_PAR_Middle Channel_256QAM_FullRB

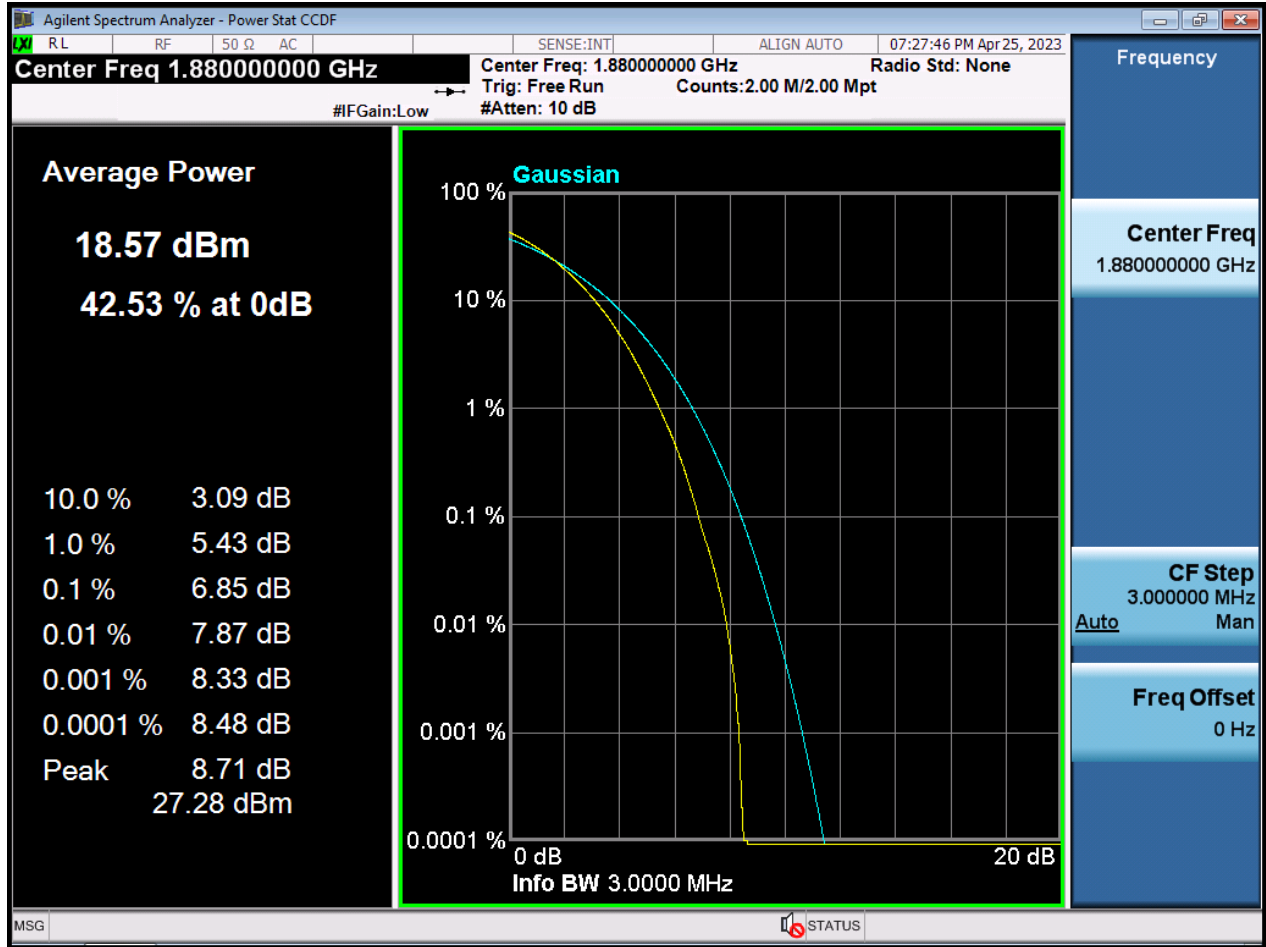


BW5 M_PAR_Middle Channel_QPSK_FullIRB

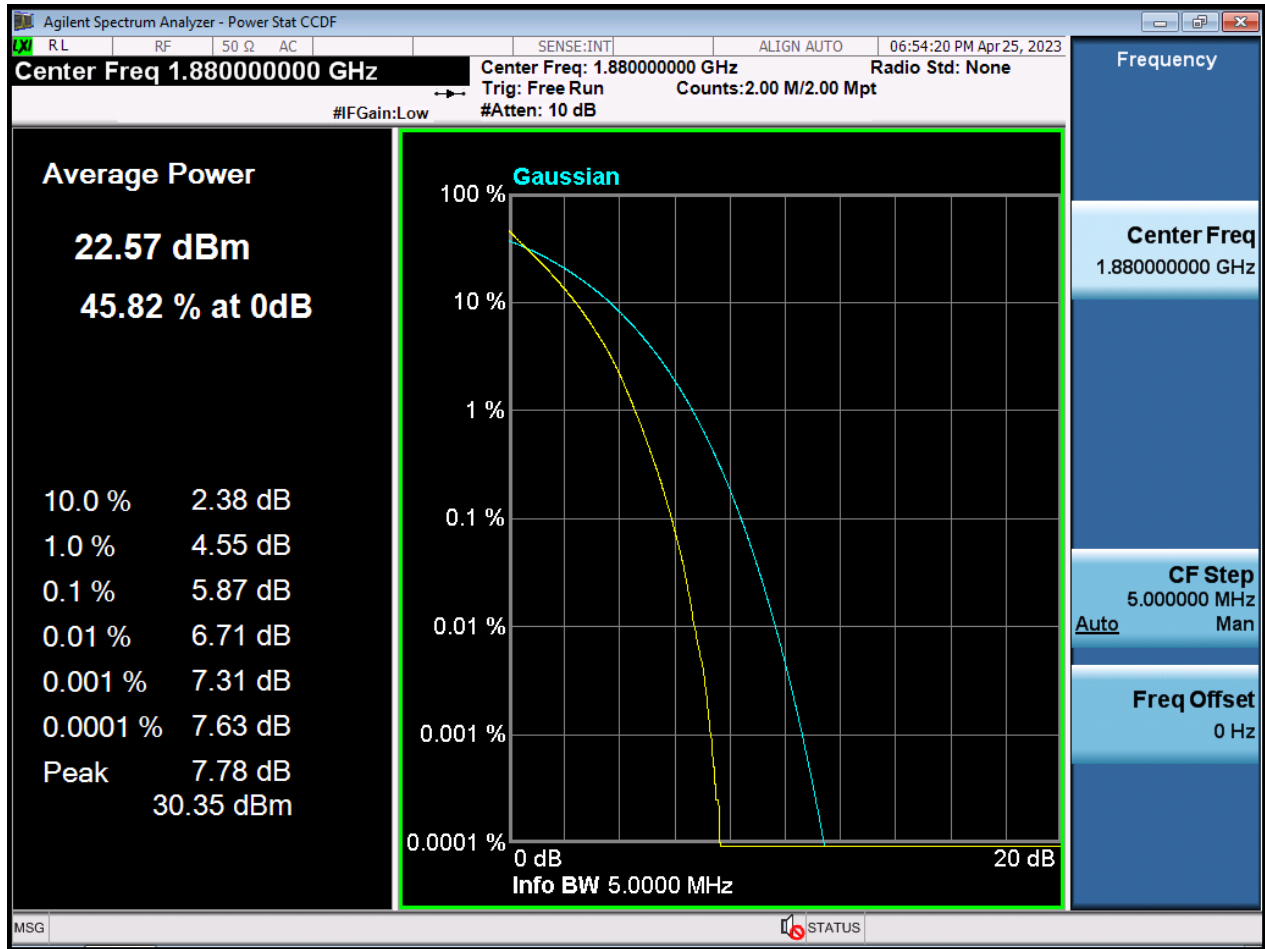


BW5 M_PAR_Middle Channel_16QAM_FullRB

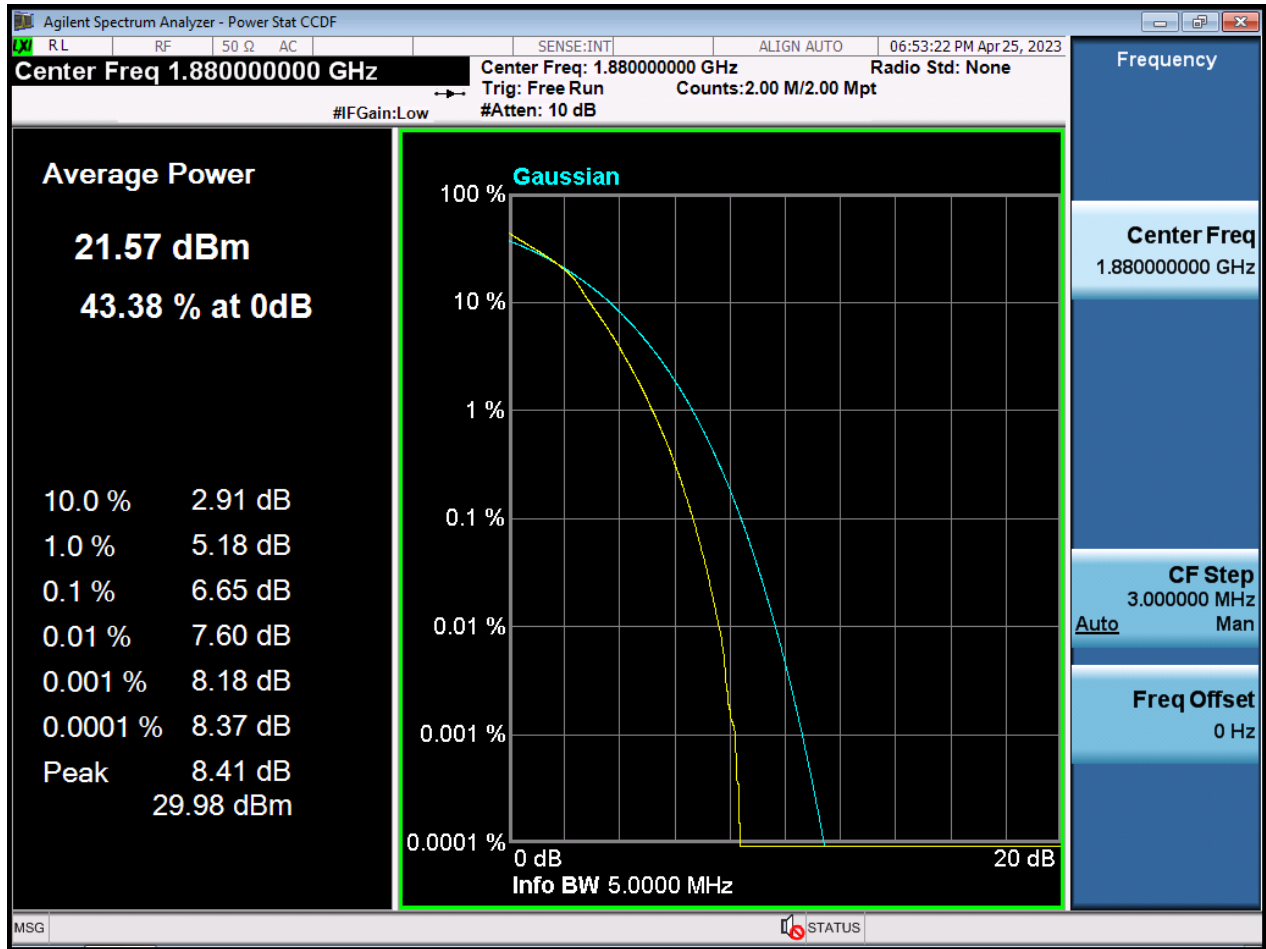


BW5 M_PAR_Middle Channel_64QAM_FullRB

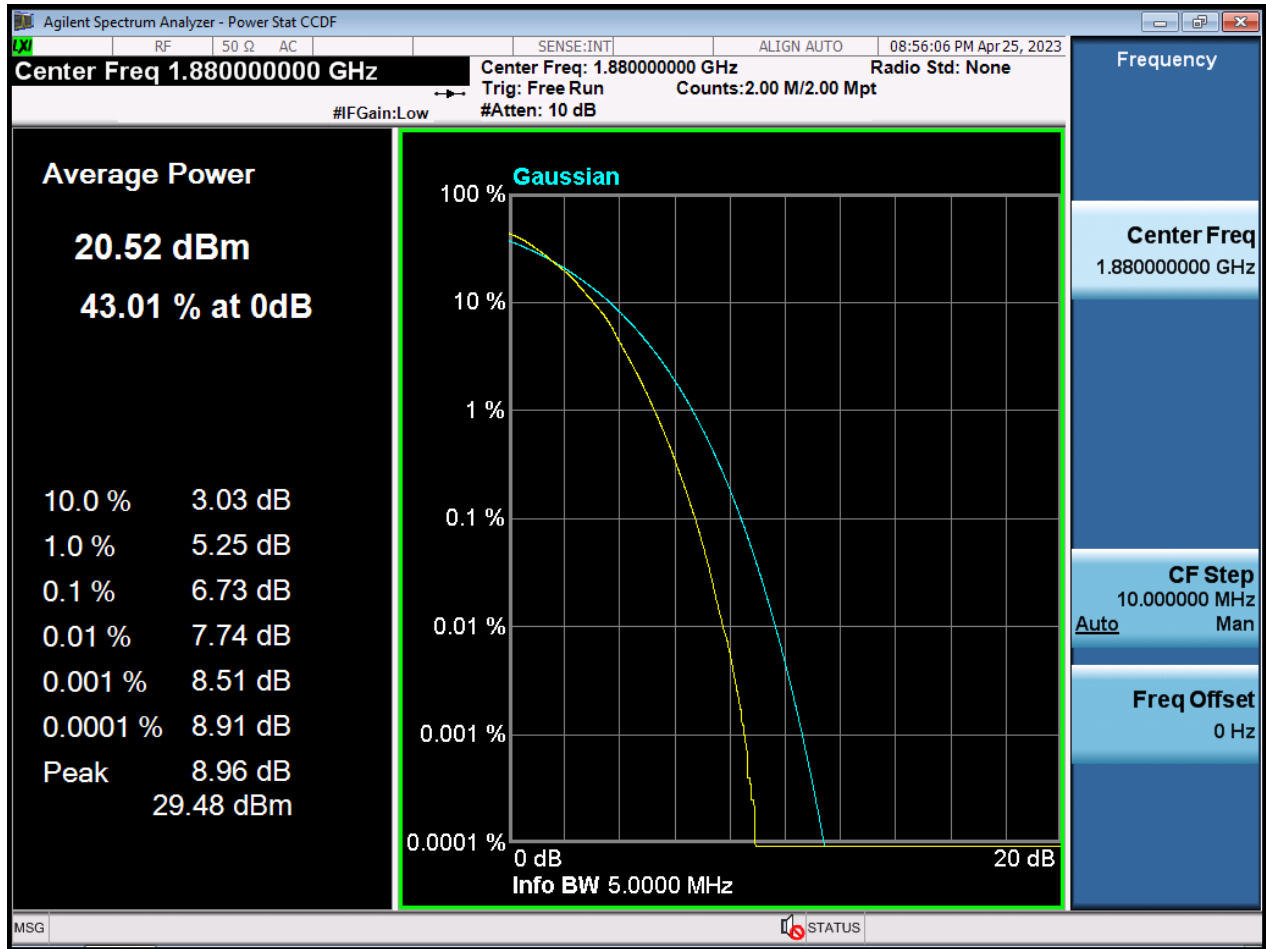


BW5 M_PAR_Middle Channel_256QAM_FullRB

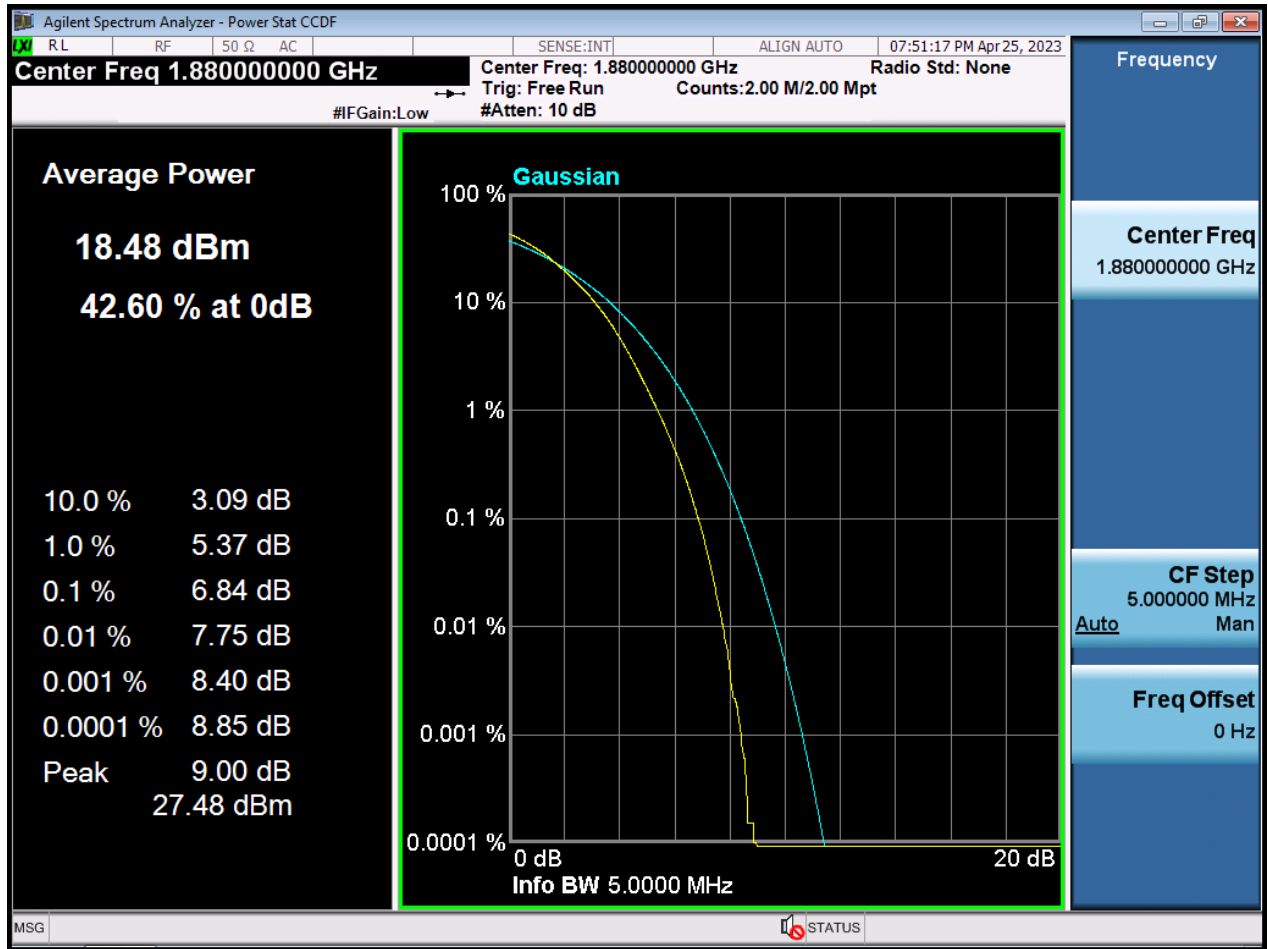


BW10 M_PAR_Middle Channelz_QPSK_FullRB

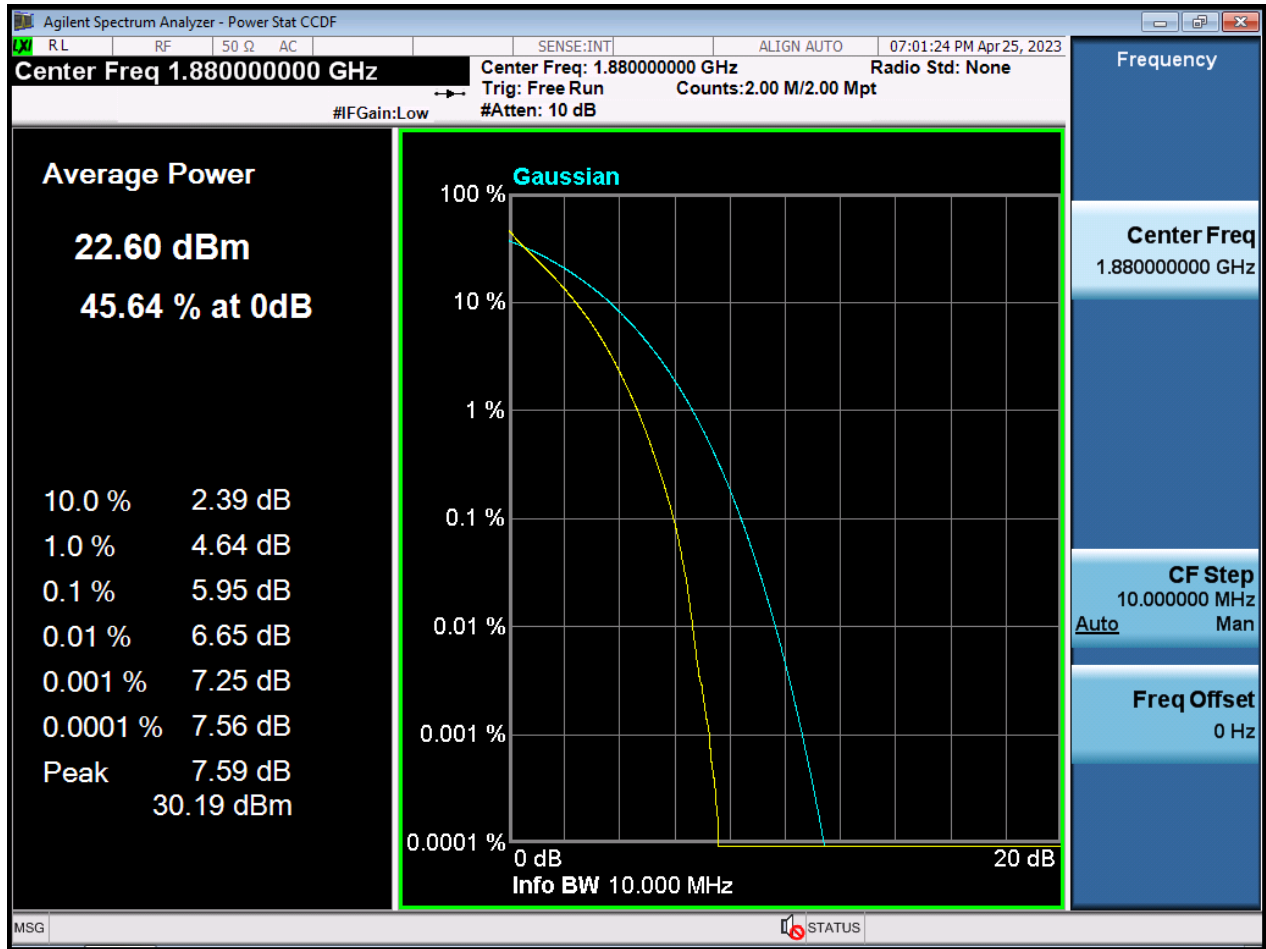


BW10 M_PAR_Middle Channel_16QAM_FullRB

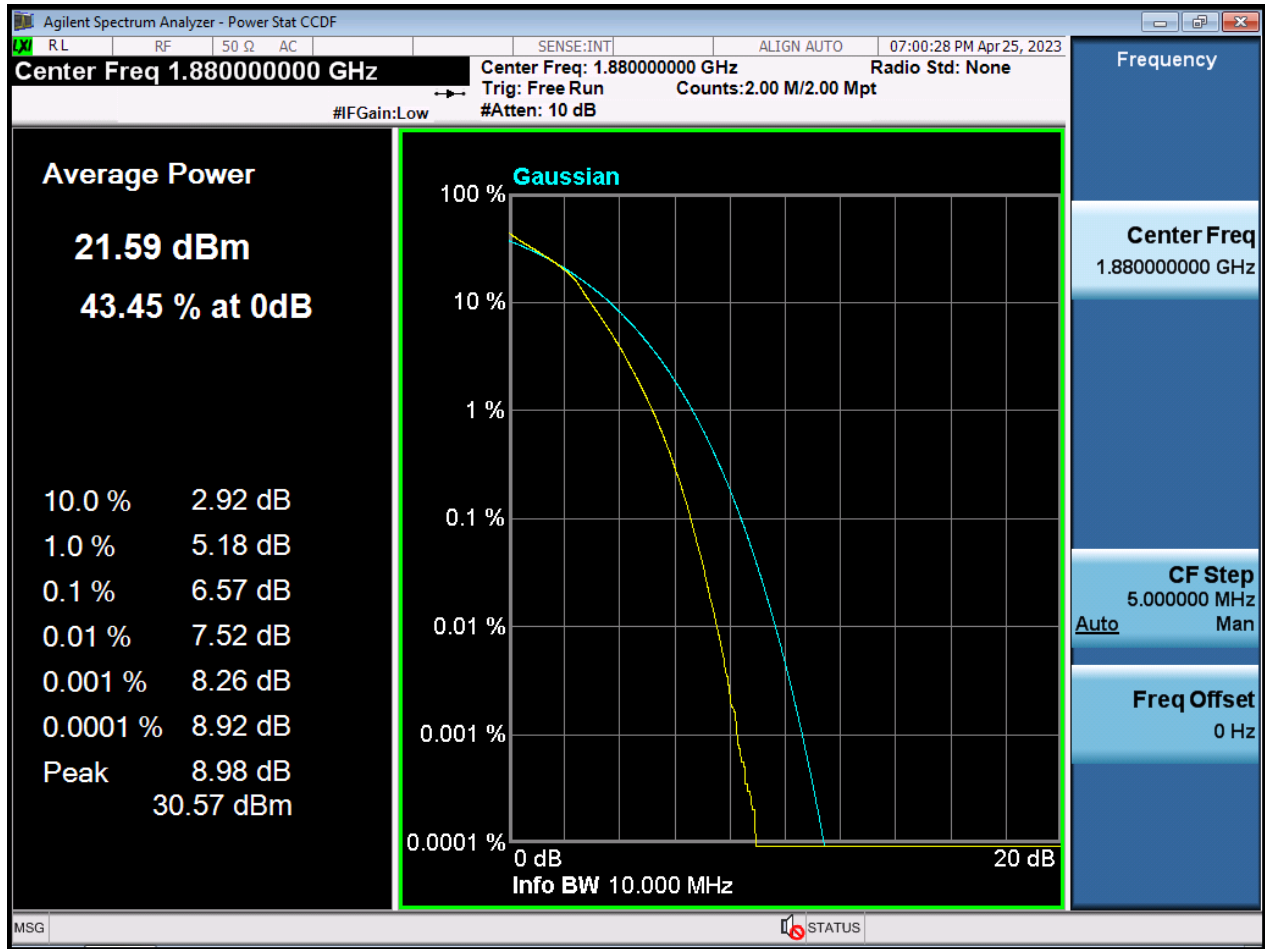


BW10 M_PAR_Middle Channel_64QAM_FullRB

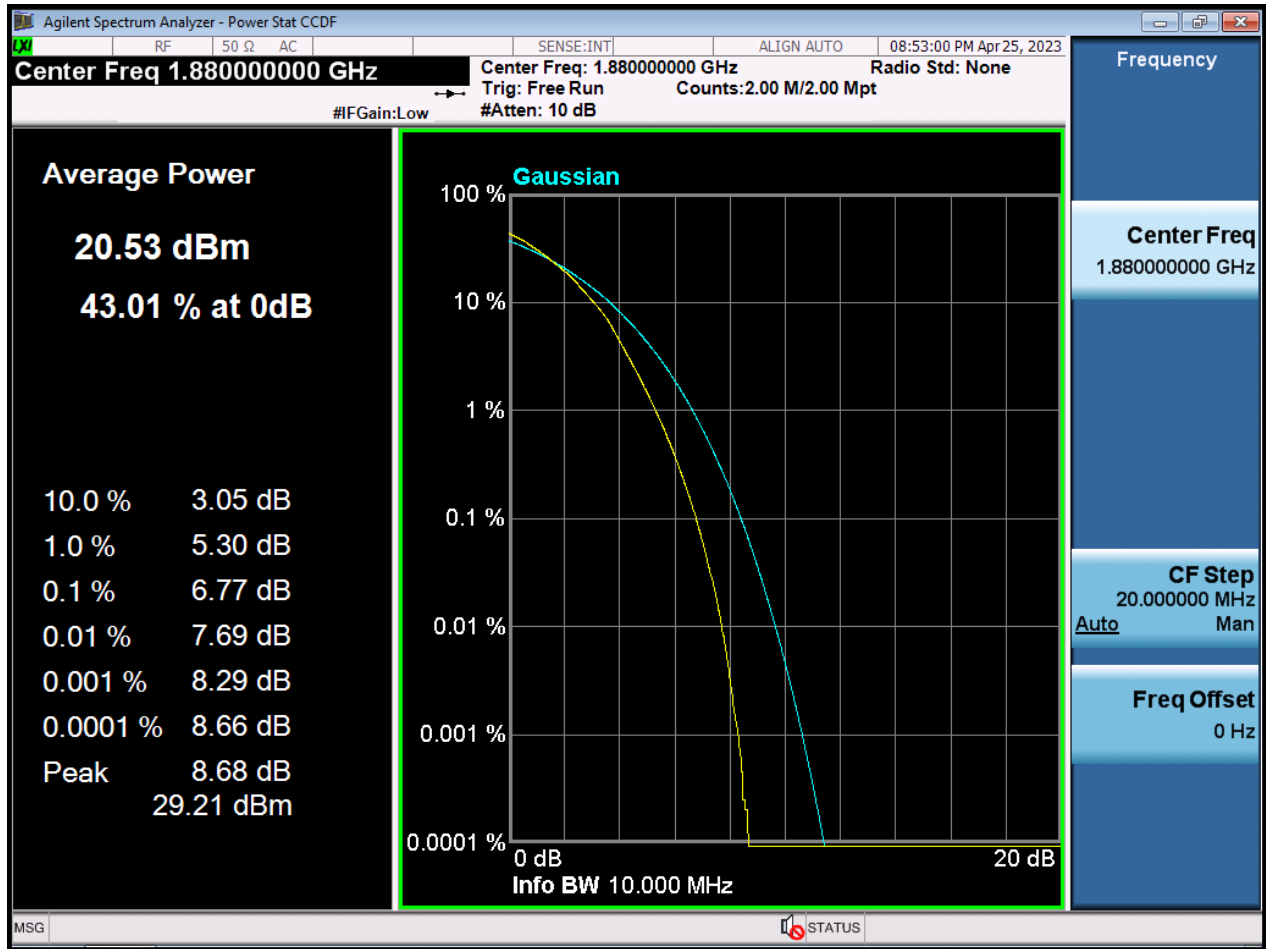


BW10 M_PAR_Middle Channel_256QAM_FullIRB

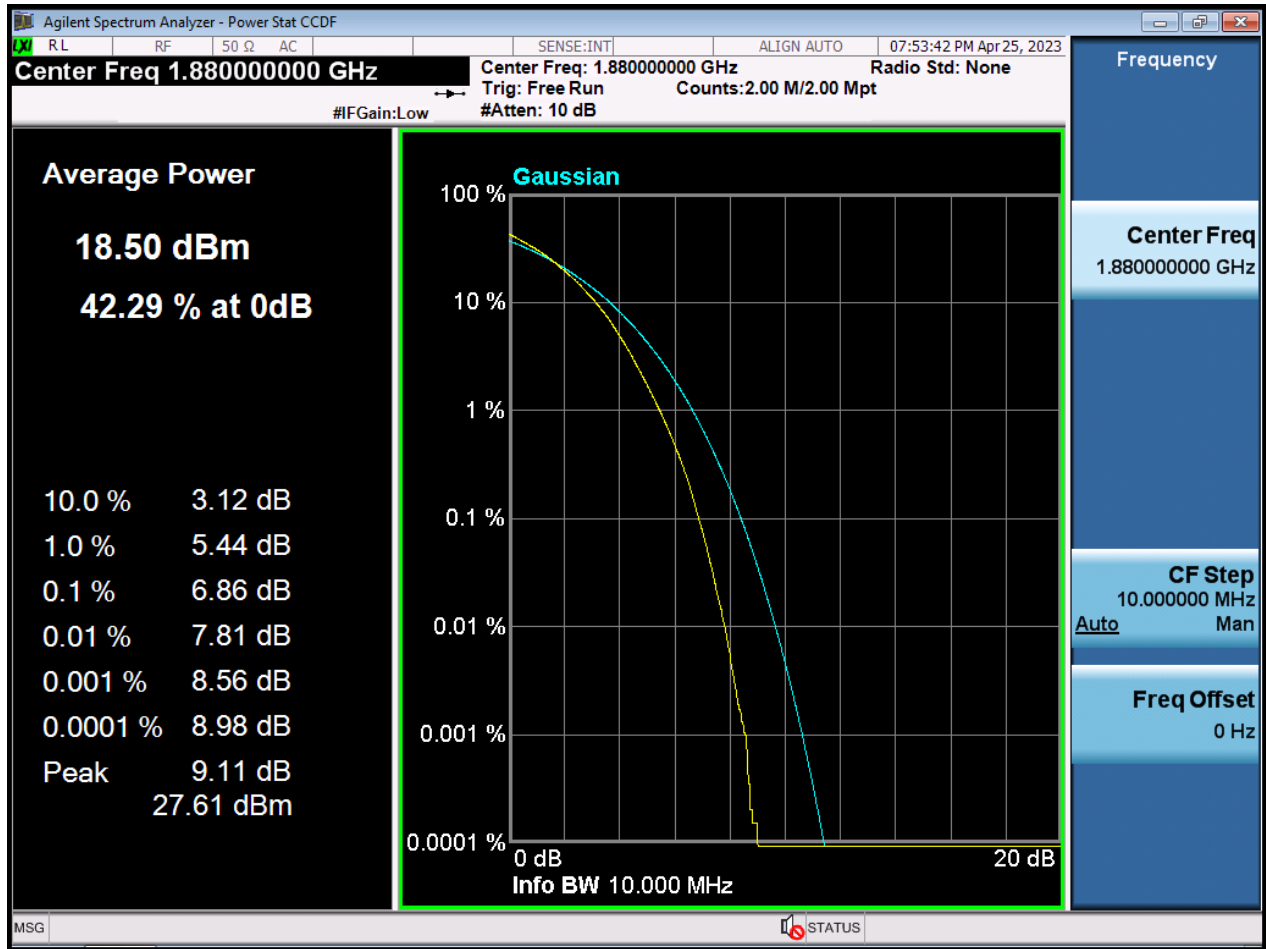


BW15 M_PAR_Middle Channel_QPSK_FullRB

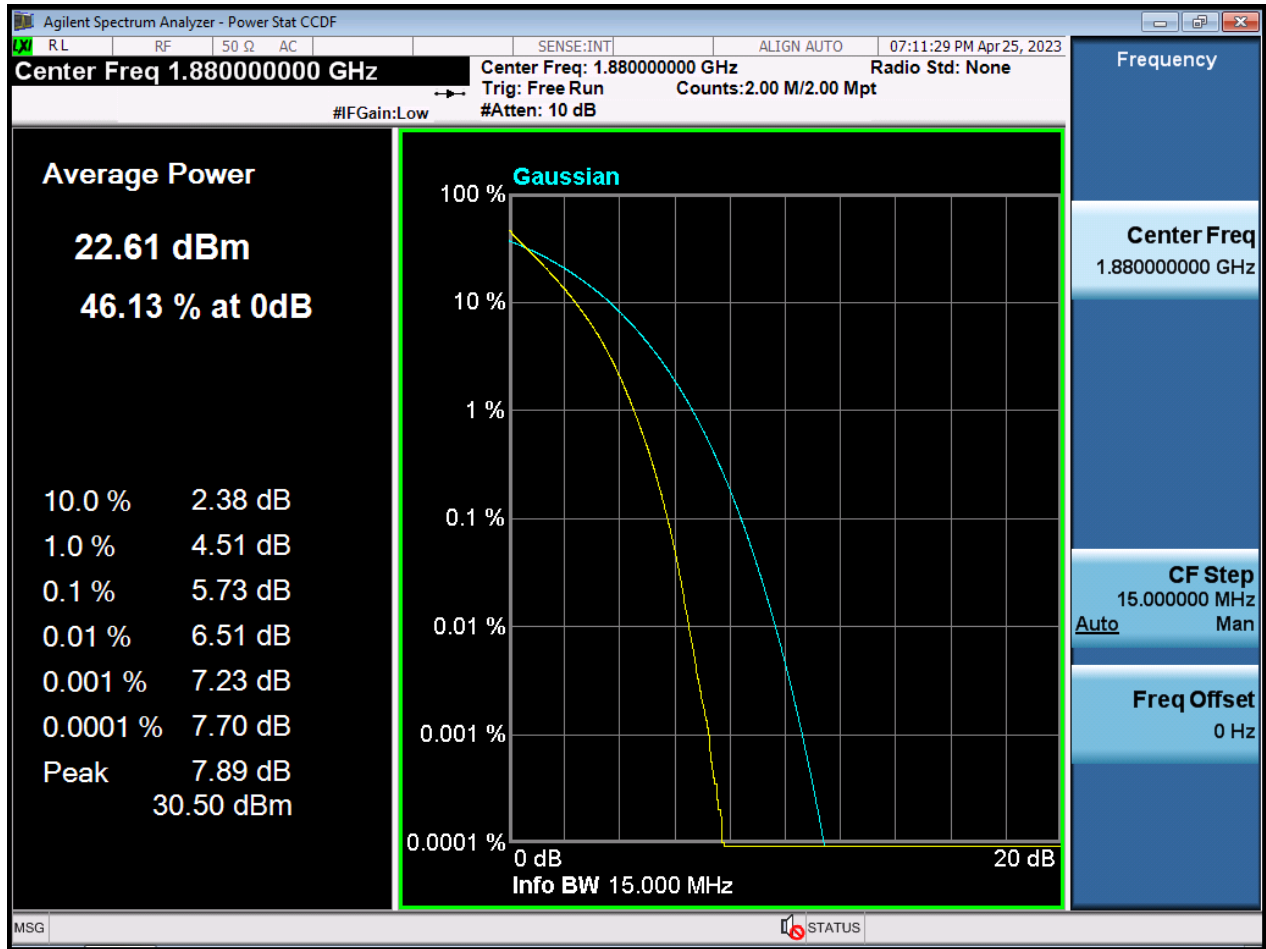


BW15 M_PAR_Middle Channel_16QAM_FullRB

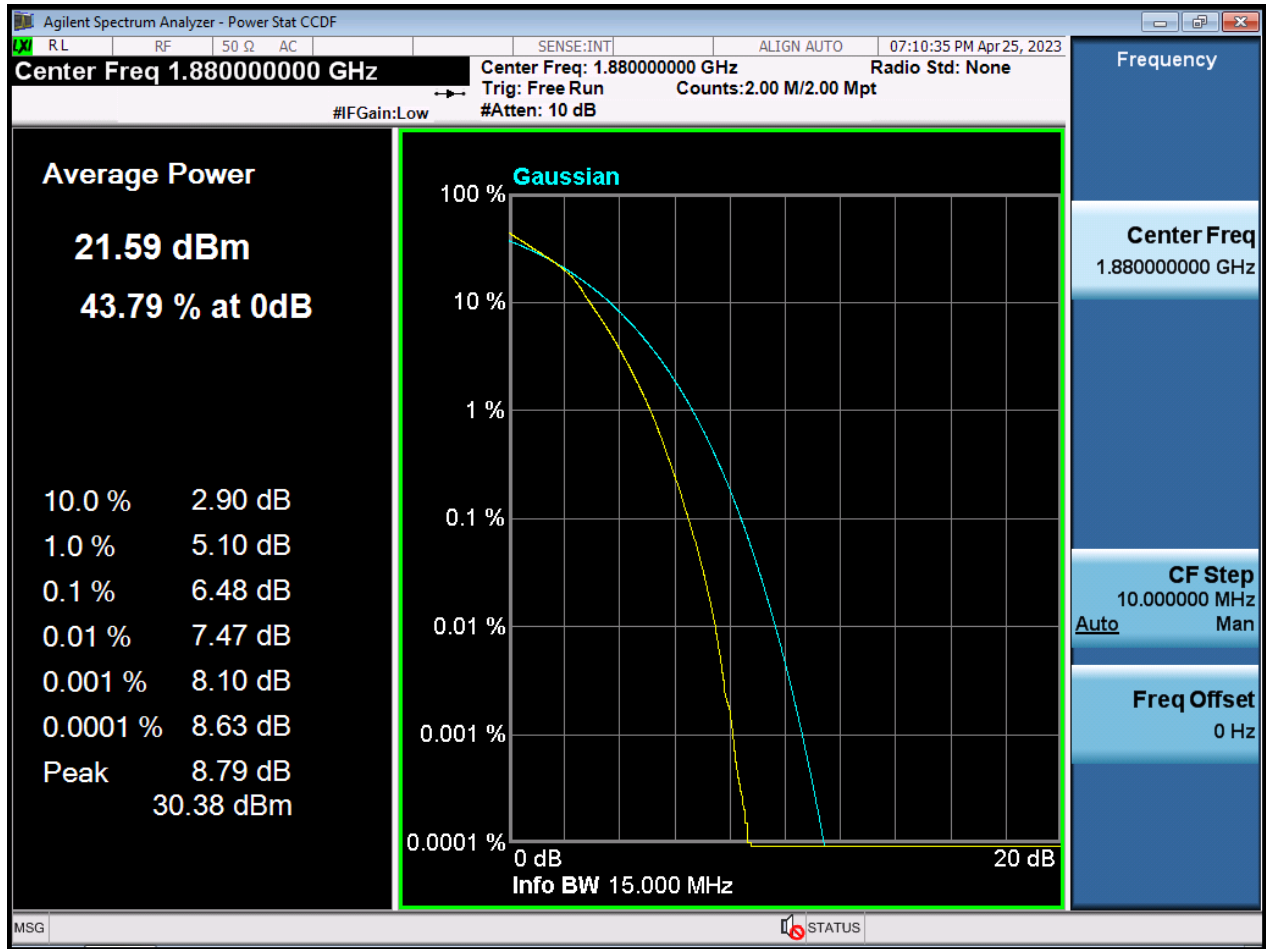


BW15 M_PAR_Middle Channel_64QAM_FullRB

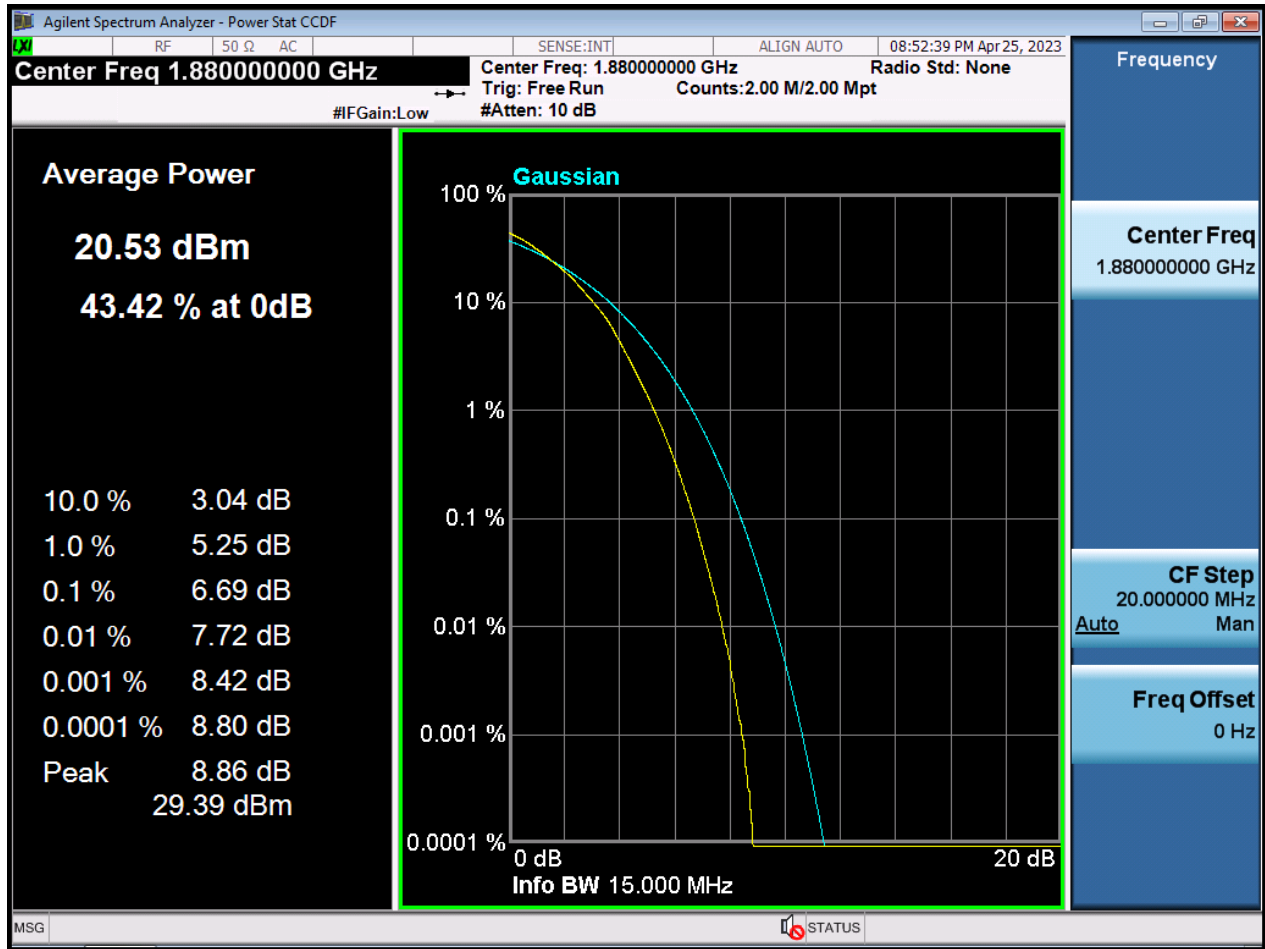


BW15 M_PAR_Middle Channel_256QAM_FullIRB

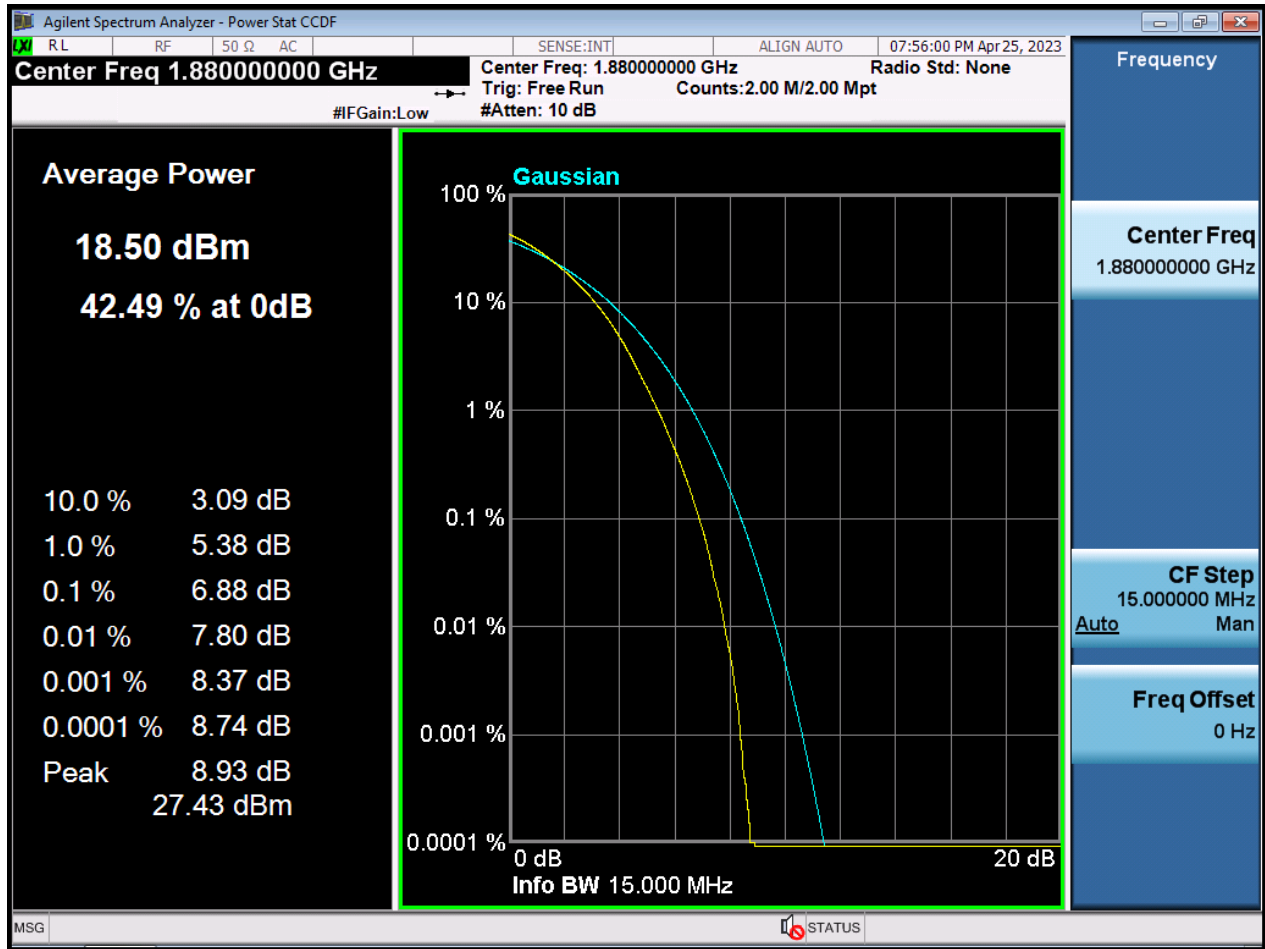


BW20 M_PAR_Middle Channel_QPSK_FullRB

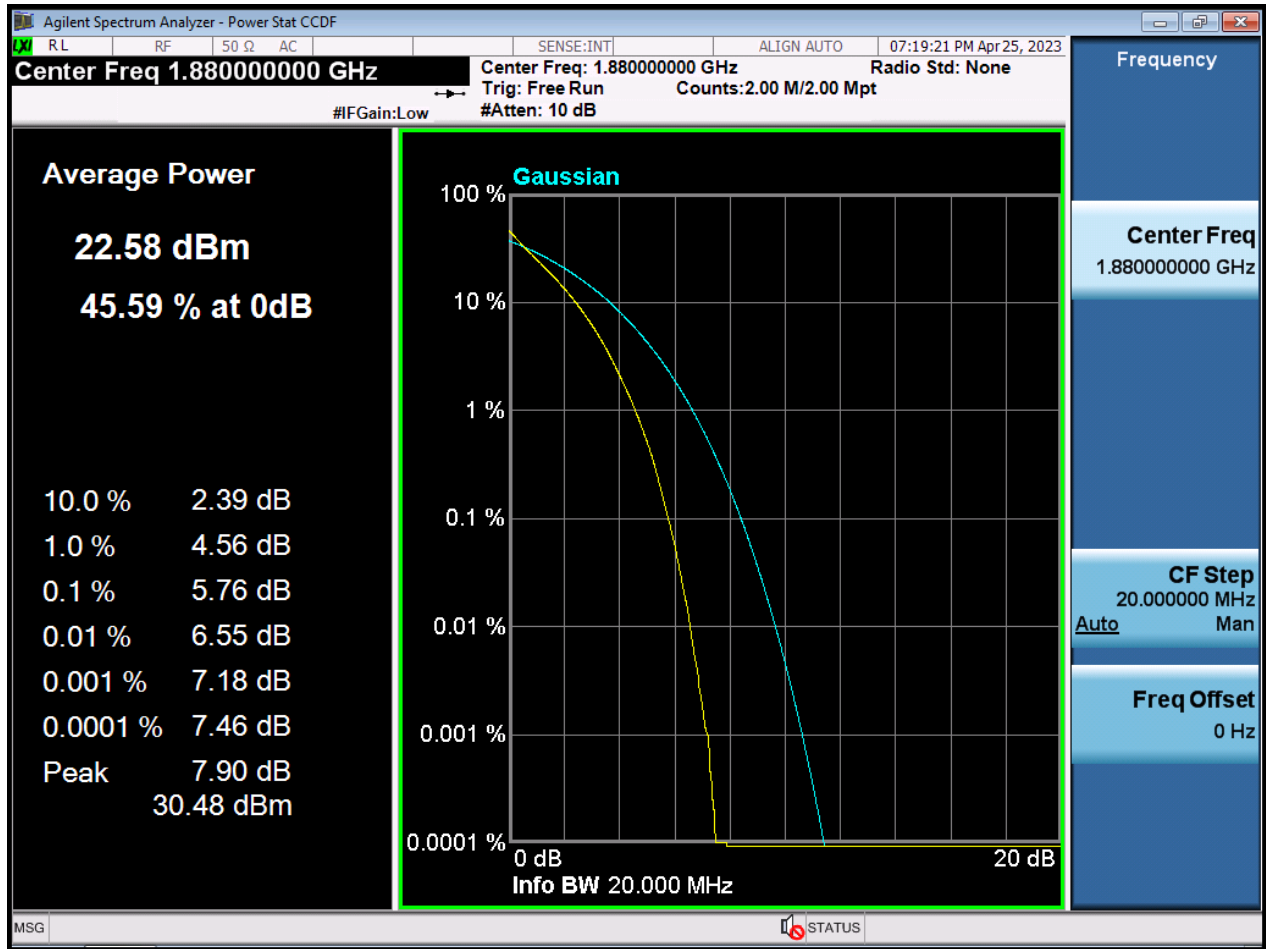


BW20 M_PAR_Middle Channel_16QAM_FullRB

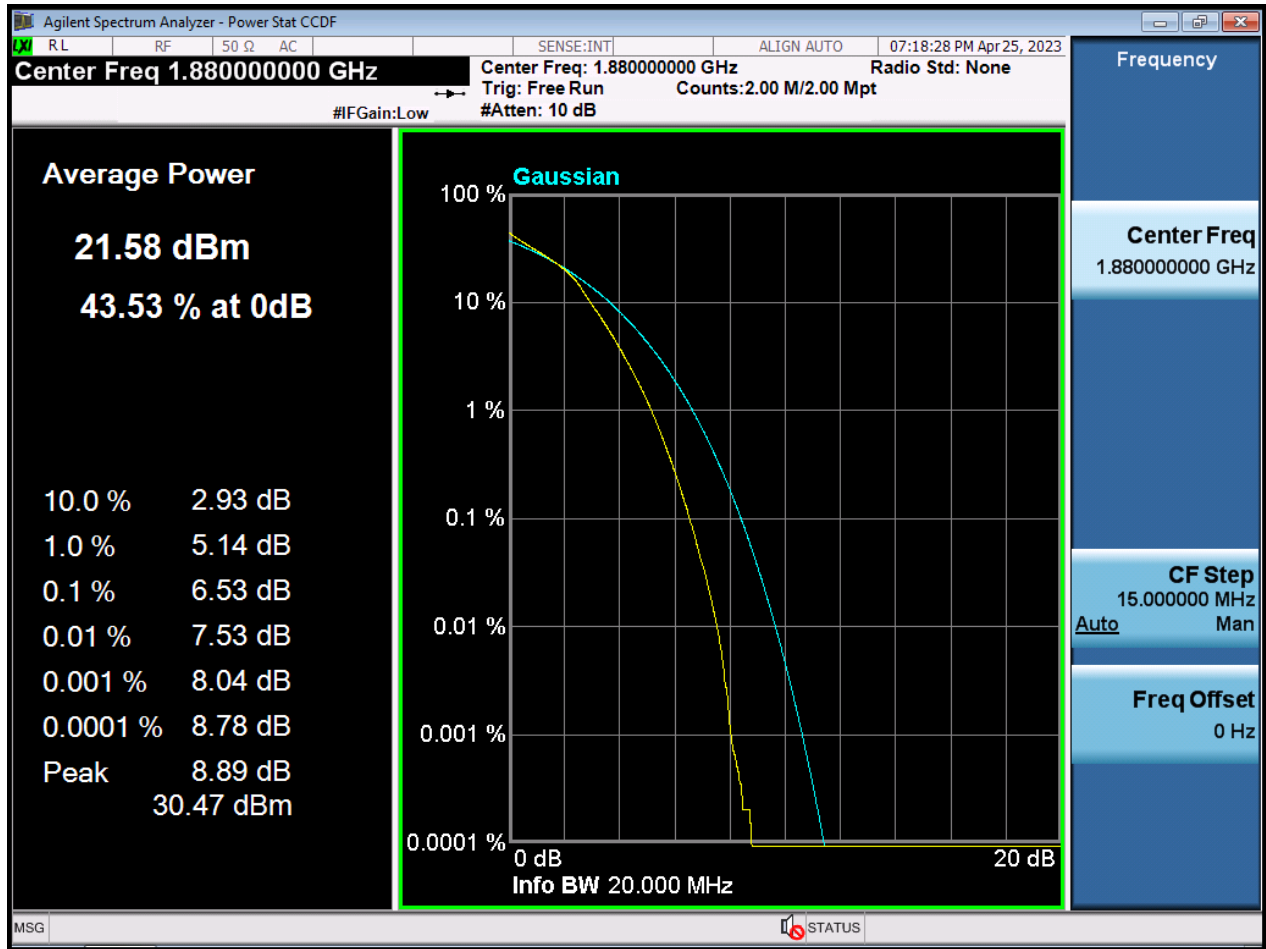


BW20 M_PAR_Middle Channel_64QAM_FullRB

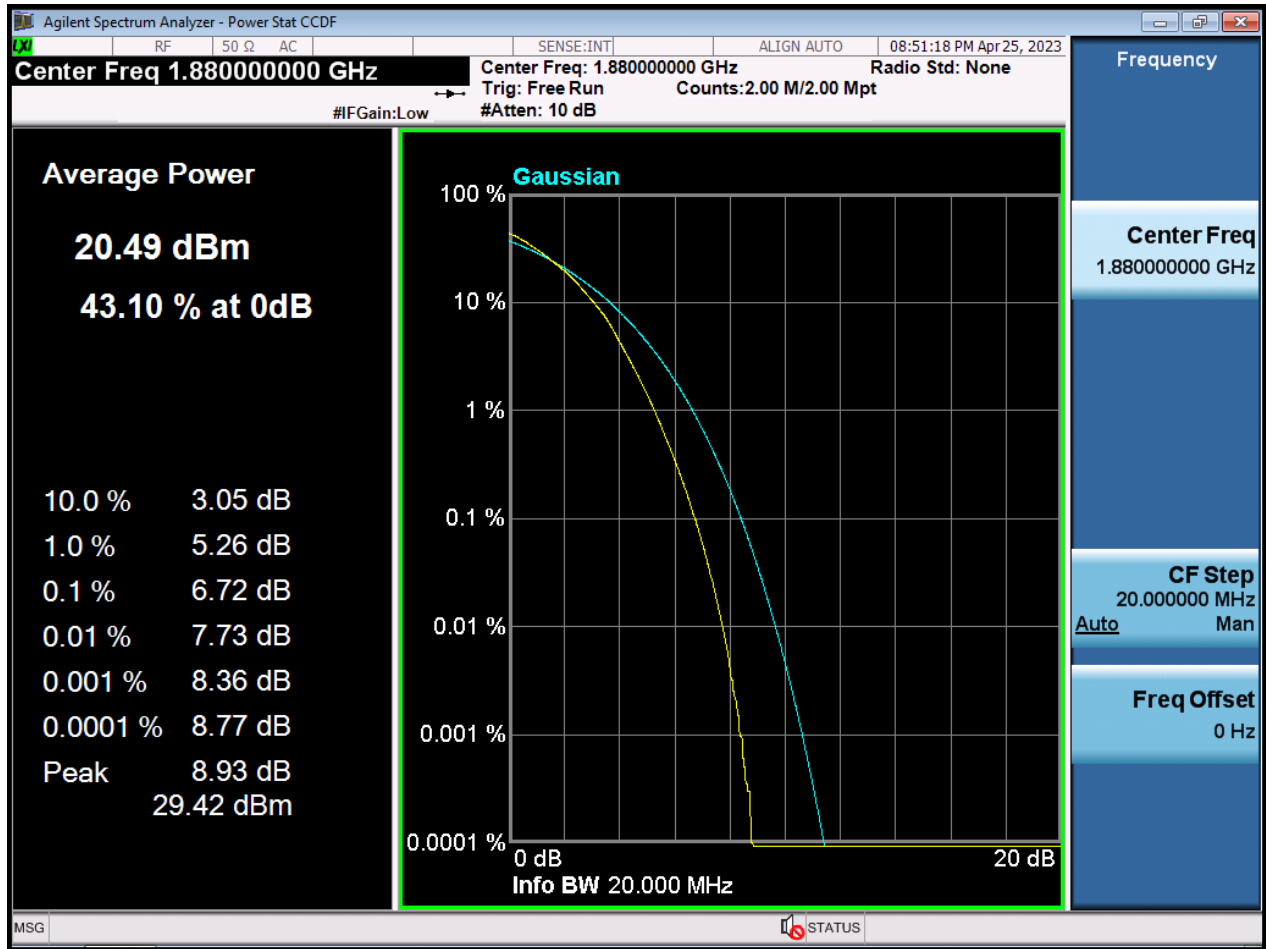


BW20 M_PAR_Middle Channel_256QAM_FullIRB

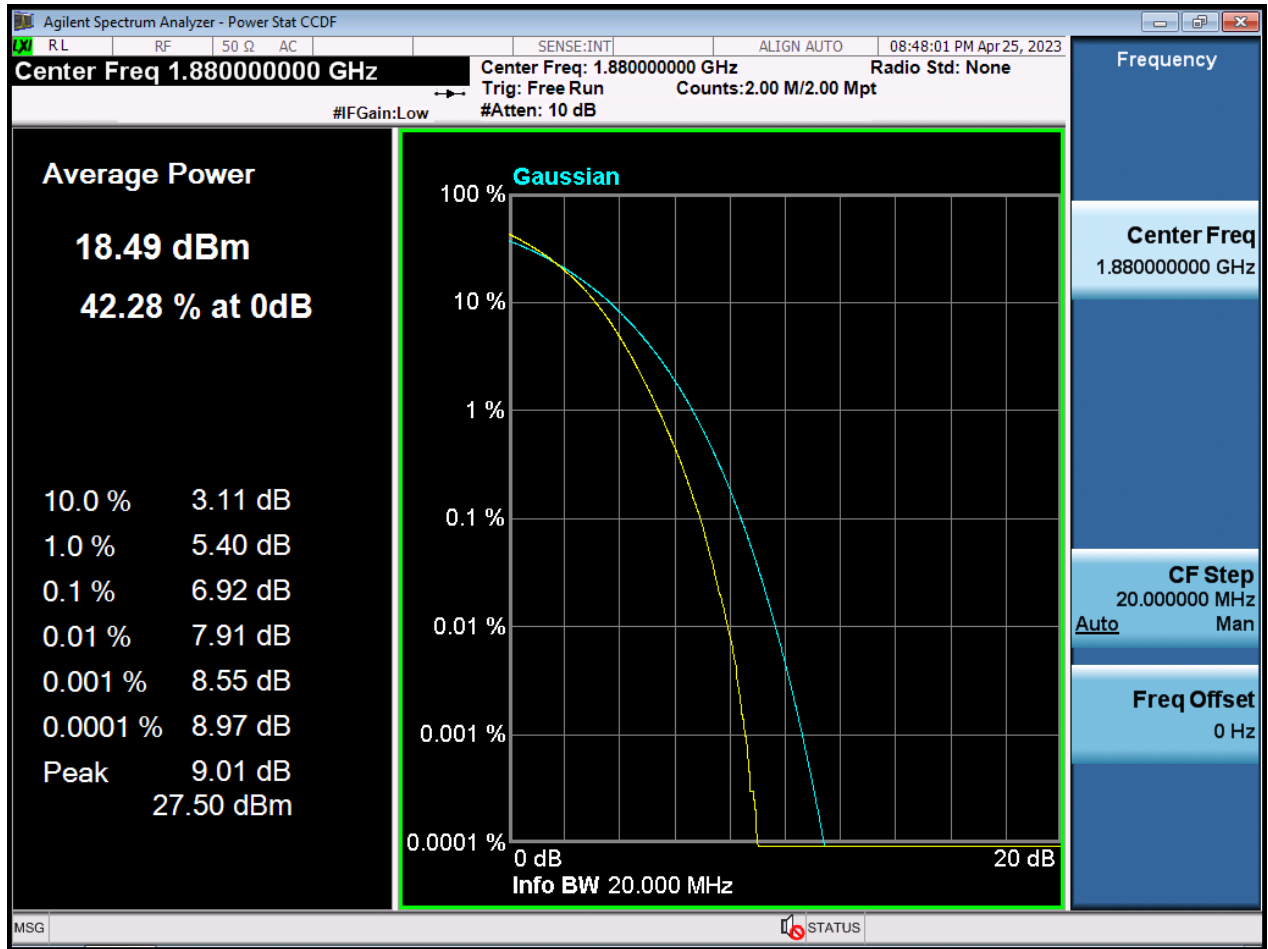


BW1.4 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

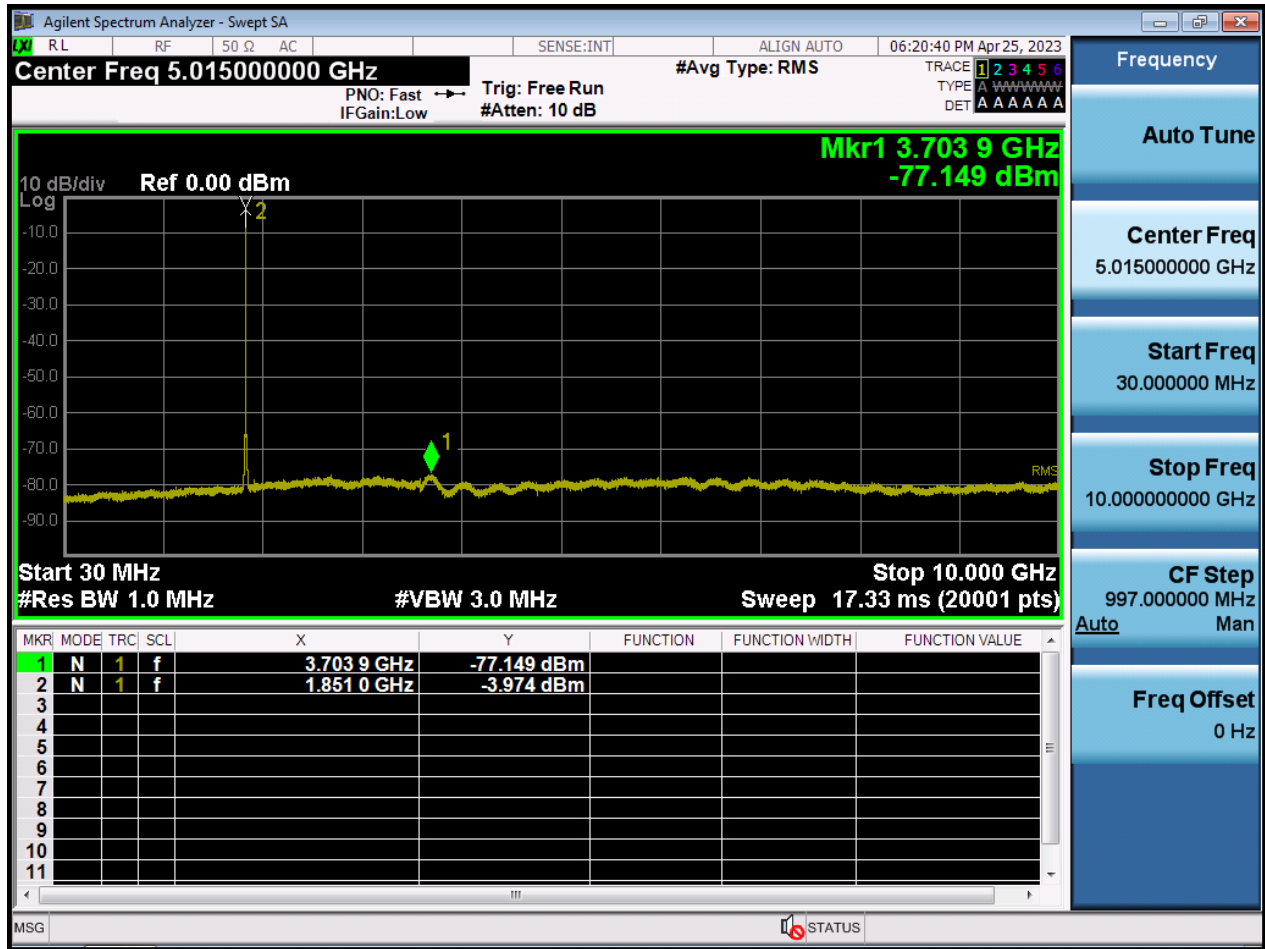


BW1.4 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

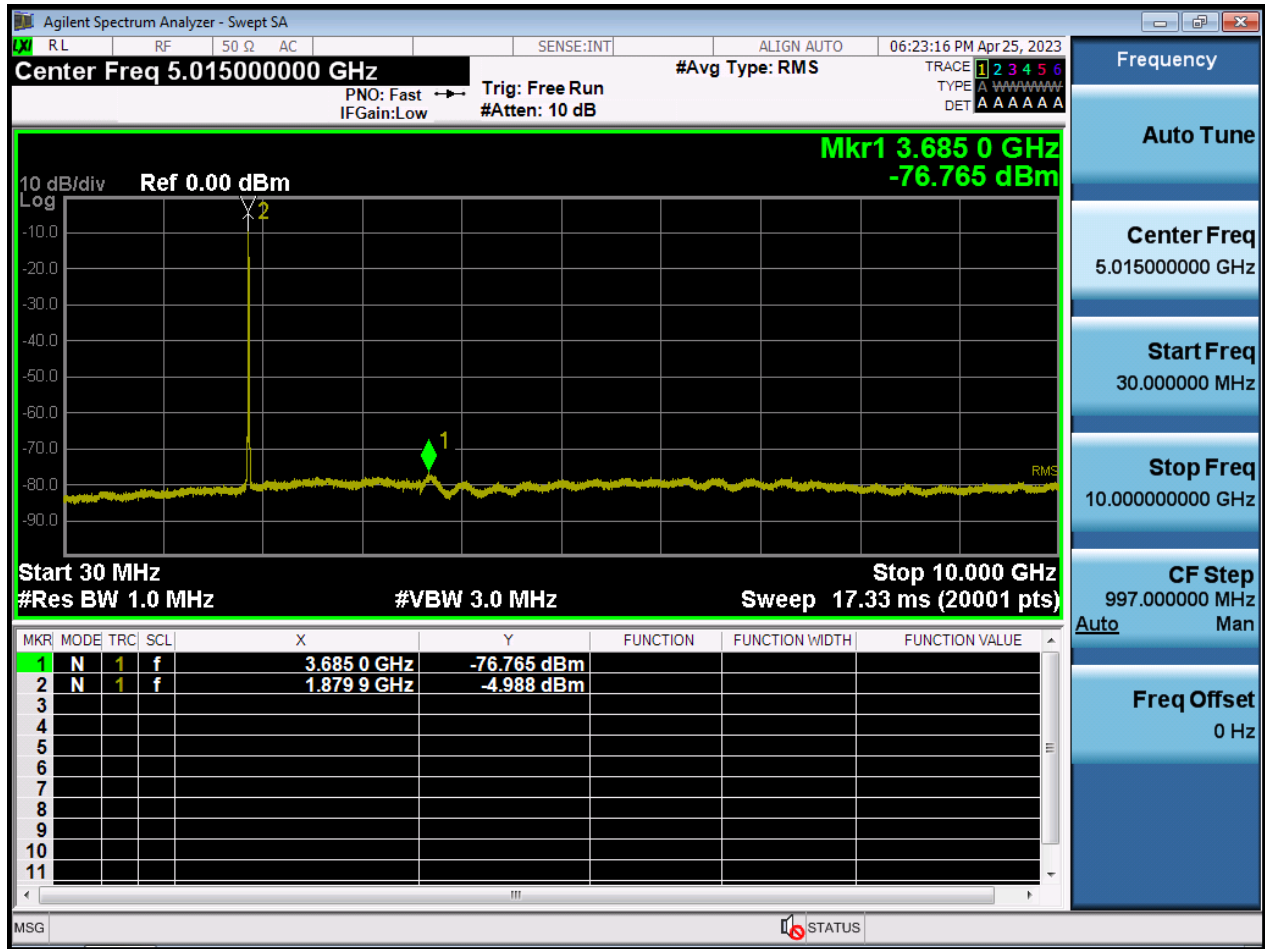


BW1.4 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

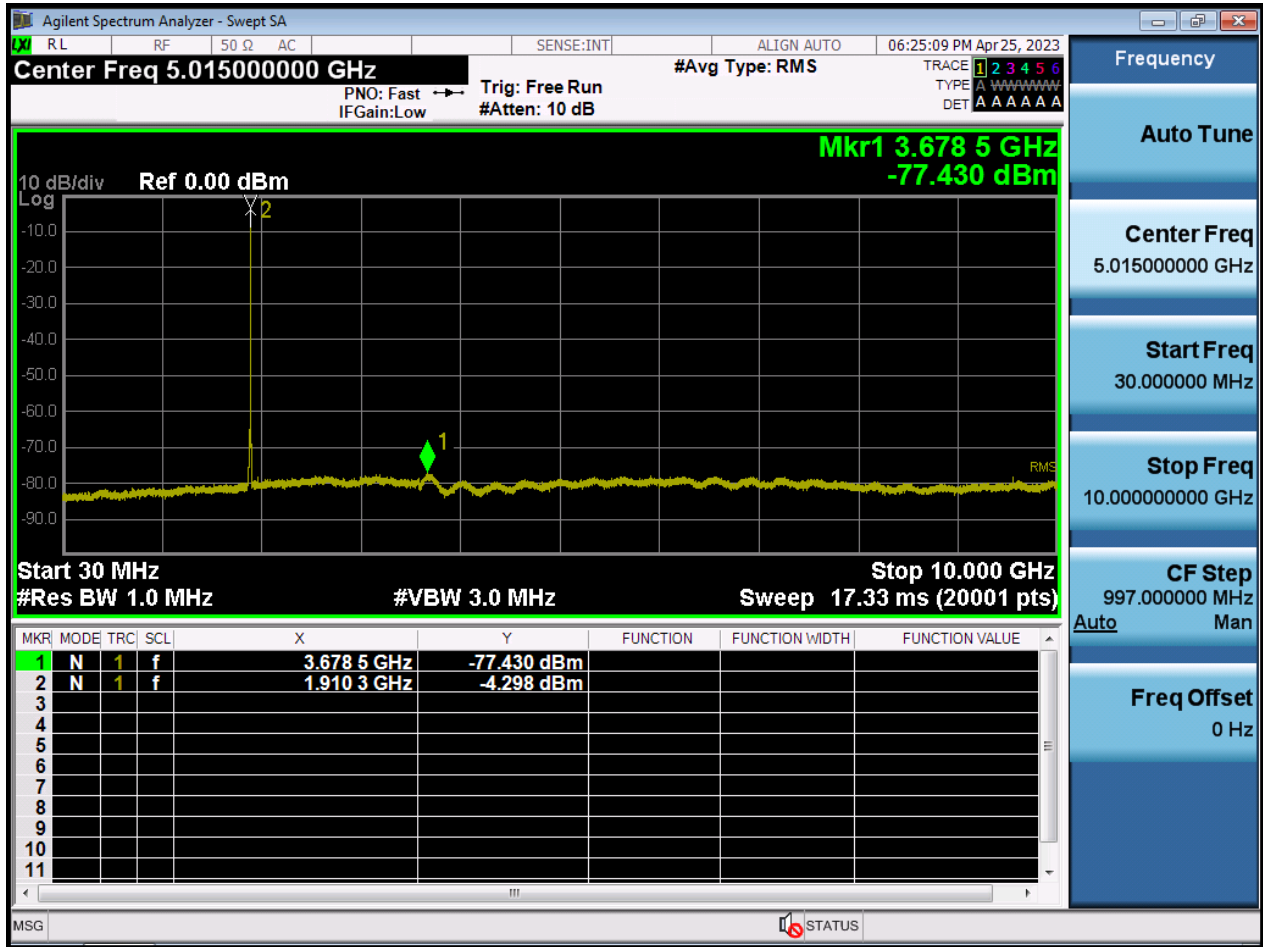

BW3 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

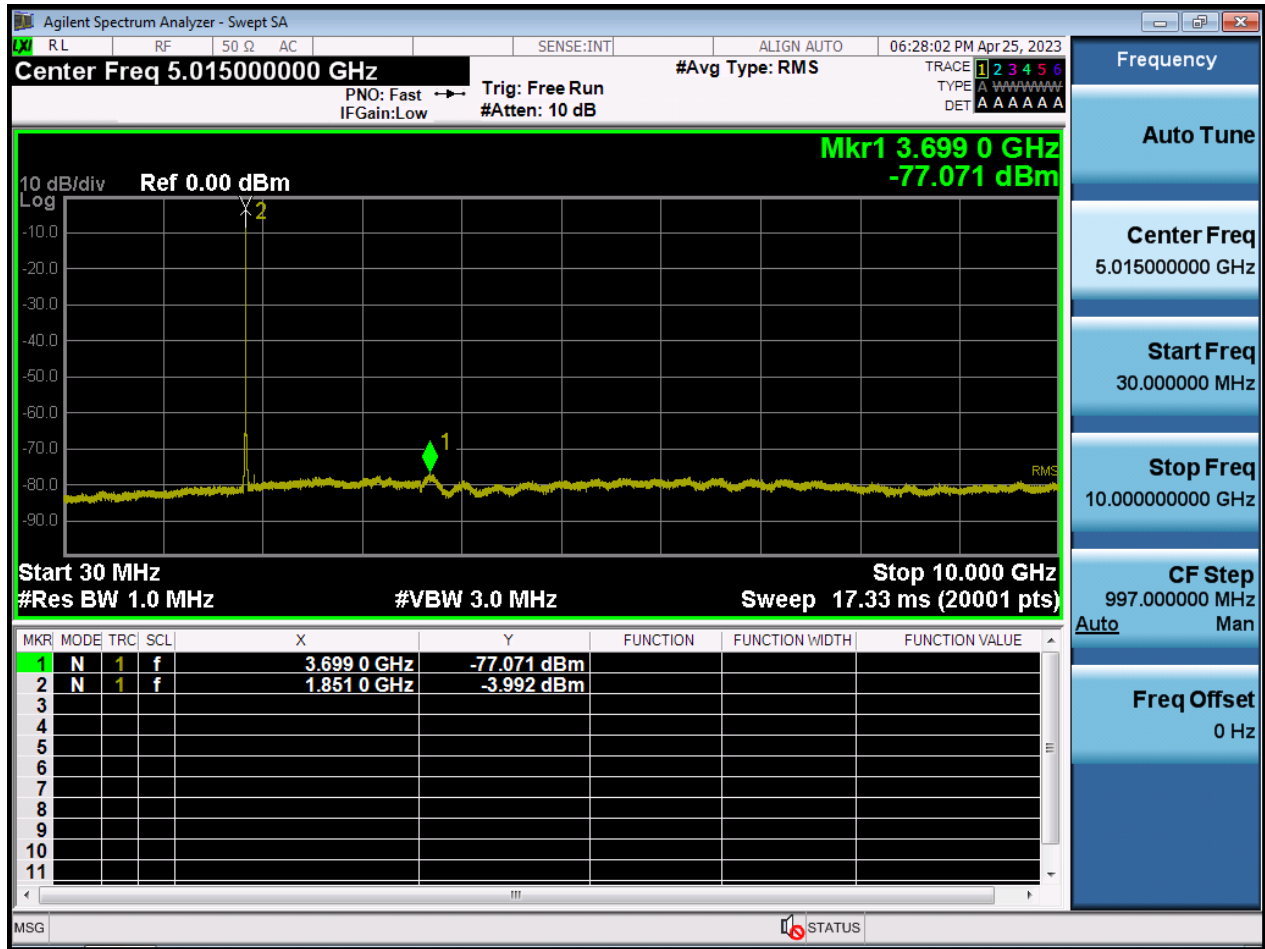

BW3 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

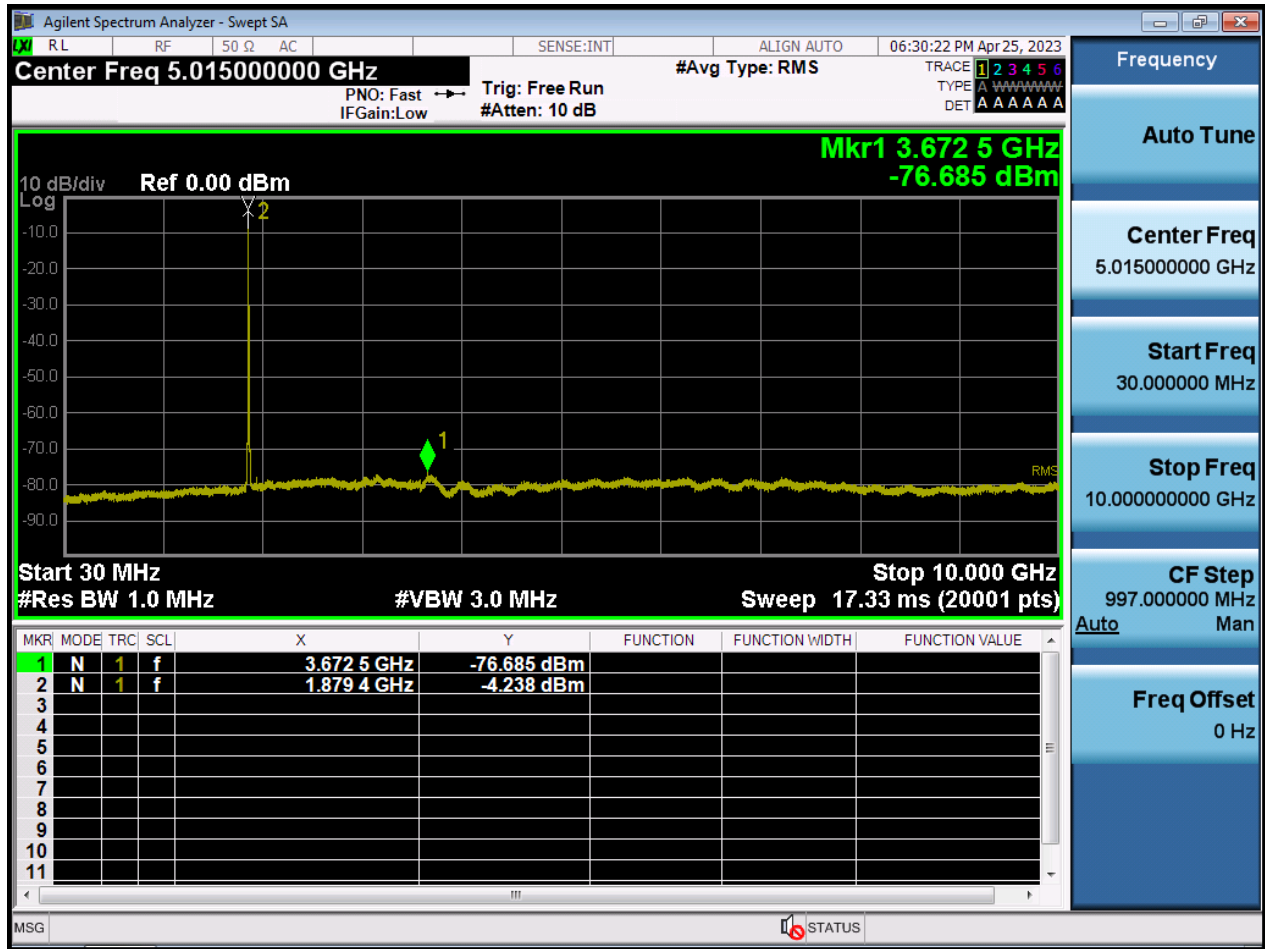

BW3 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

