

# FCC LTE REPORT

## Certification

**Applicant Name:**  
 SAMSUNG Electronics Co., Ltd.

**Date of Issue:**  
 March 04, 2022

**Address:**  
 129, Samsung-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Location:**  
 HCT CO., LTD.,  
 74, Seoicheon-ro 578beon-gil, Majang-myeon,  
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-RF-2203-FC014

**FCC ID:** A3LSMM536B

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

Model(s): SM-M536B/DSN  
 EUT Type: Mobile phone  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 FCC Rule Part(s): §90, §22, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band26 (1.4)	814.7 – 824.0	1M10G7D	QPSK	0.262	24.18
		1M09W7D	16QAM	0.224	23.51
		1M10W7D	64QAM	0.174	22.41
LTE – Band26 (3)	815.5 – 824.0	2M71G7D	QPSK	0.262	24.18
		2M70W7D	16QAM	0.220	23.43
		2M70W7D	64QAM	0.174	22.40
LTE – Band26 (5)	816.5 – 824.0	4M52G7D	QPSK	0.268	24.28
		4M50W7D	16QAM	0.225	23.52
		4M51W7D	64QAM	0.171	22.34
LTE – Band26 (10)	819.0 – 824.0	9M00G7D	QPSK	0.265	24.24
		8M98W7D	16QAM	0.224	23.50
		8M99W7D	64QAM	0.173	22.37
LTE – Band26 (15)	821.5	13M5G7D	QPSK	0.264	24.22
		13M5W7D	16QAM	0.226	23.55
		13M5W7D	64QAM	0.175	22.42

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.  
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report No.: HCT-RF-2203-FC014

---

REVIEWED BY



---

Report prepared by : Jae Mun Do  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2203-FC014	March 04, 2022	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Table of Contents

REVIEWED BY .....	2
1. GENERAL INFORMATION .....	5
2. INTRODUCTION .....	6
2.1. DESCRIPTION OF EUT.....	6
2.2. MEASURING INSTRUMENT CALIBRATION .....	6
2.3. TEST FACILITY .....	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE .....	7
3.2 CONDUCTED OUTPUT POWER.....	8
3.3 RADIATED POWER.....	9
3.4 RADIATED SPURIOUS EMISSIONS .....	10
3.5 OCCUPIED BANDWIDTH. ....	11
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	12
3.7 CHANNEL EDGE.....	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	14
3.9 WORST CASE(RADIATED TEST) .....	15
3.10 WORST CASE(CONDUCTED TEST) .....	16
4. LIST OF TEST EQUIPMENT .....	17
5. MEASUREMENT UNCERTAINTY .....	18
6. SUMMARY OF TEST RESULTS .....	19
7. SAMPLE CALCULATION .....	20
8. TEST DATA .....	22
8.1 CONDUCTED OUTPUT POWER.....	22
8.2 EFFECTIVE RADIATED POWER.....	27
8.3 RADIATED SPURIOUS EMISSIONS .....	29
8.4 OCCUPIED BANDWIDTH .....	30
8.5 CONDUCTED SPURIOUS EMISSIONS .....	31
8.6 CHANNEL EDGE.....	31
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	32
8.8 STADDLE CHANNEL .....	37
8.8.1 CONDUCTED OUTPUT POWER.....	37
8.8.2 EFFECTIVE RADIATED POWER .....	41
8.8.3 RADIATED SPURIOUS EMISSIONS .....	42
8.8.4 CONDUCTED SPURIOUS EMISSIONS .....	43
8.8.5 CHANNEL EDGE(Part90) .....	43
8.8.6 BAND EDGE(Part22) .....	43
9. TEST PLOTS.....	44
10. TEST PLOTS (STRADDLE CHANNEL).....	88
11 ANNEX A_ TEST SETUP PHOTO .....	113

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMM536B
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§90, §22, §2
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-M536B/DSN
<b>Tx Frequency:</b>	814.7 MHz – 823.3 MHz (LTE – Band 26 (1.4 MHz)) 815.5 MHz – 822.5 MHz (LTE – Band 26 (3 MHz)) 816.5 MHz – 821.5 MHz (LTE – Band 26 (5 MHz)) 819.0 MHz (LTE – Band 26 (10 MHz)) 821.5 MHz (LTE – Band 26 (15 MHz))
<b>Date(s) of Tests:</b>	February 03, 2022 ~ February 23, 2022
<b>Serial number:</b>	Radiated: R3CRC0LNZSW Conducted: R3CRC0LNQJN

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac (20/40/80), Bluetooth, BT LE, NFC.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

### 3.2 CONDUCTED OUTPUT POWER

#### Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

#### Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

#### Test setup

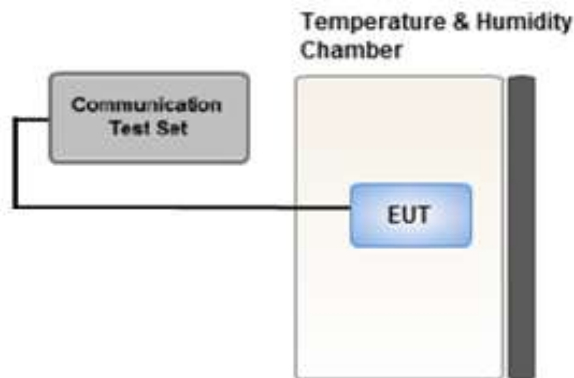



### 3.3 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $>$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.4 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

### 3.5 OCCUPIED BANDWIDTH.

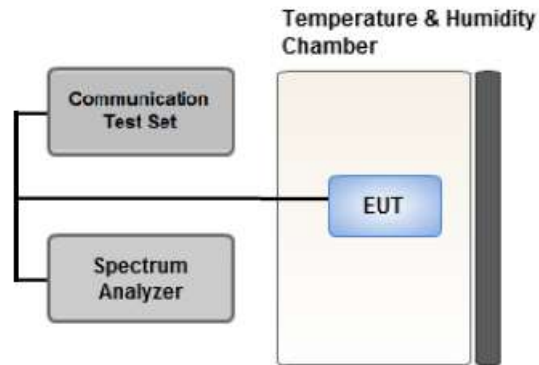

**Test setup**

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### **Test Settings**

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

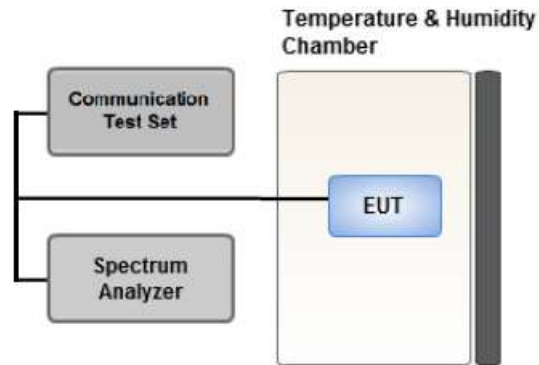

**Test setup**

#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 CHANNEL EDGE

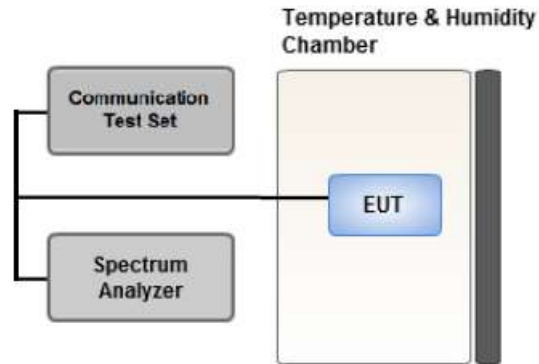

#### Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW :
  - .- EA licensee's frequency block by up to and including 37.5 kHz : 300 Hz
  - .- EA licensee's frequency block greater than 37.5 kHz : 100 kHz
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### Test Notes

For 90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

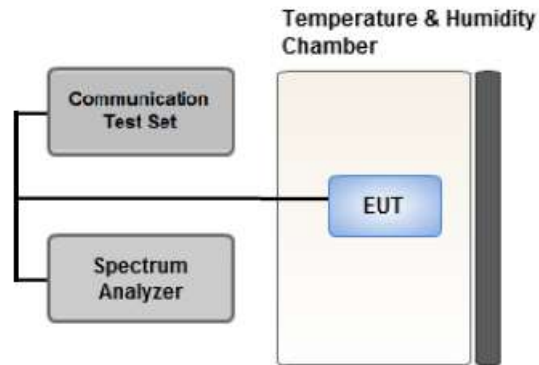

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.9 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)  
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location. There has no significant emission raised.
- WWAN + UNII + BT (Worst case : Stand alone)
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 3 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- All modes of operation were tested and the worst case results are reported.
- Please refer to the table below.

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	RB size	RB offset	Axis
<b>Effective Radiated Power</b>	QPSK, 16QAM, 64QAM	1.4	1	5	X
		3	1	14	
		5	1	24	
		10	1	49	
		15	1	74	
<b>Radiated Spurious and Harmonic Emissions</b>	QPSK	3	1	14	Z

### 3.10 WORST CASE(CONDUCTED TEST)

-Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM	1.4, 3, 5	High	Full RB	0
	QPSK, 16QAM, 64QAM	10, 15	Mid	Full RB	0
Channel Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Mid	1	0
				1	49
		15	Mid	1	0
				1	74
1.4, 3, 5	Low, High	Full RB	0		
10, 15	Mid	Full RB	0		
Band Edge (Staddle Channel)	QPSK	1.4	Mid	1	5
		3	Mid	1	14
		5	Mid	1	24
		10	Mid	1	49
		1.4, 3, 5, 10	Mid	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5	Low, High	1	0
		10, 15	Mid	1	0



#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6200863156	12/29/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Channel Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §90.691	< 50 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5 kHz of Block Edge	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046 §90.635	< 100 Watts	PASS
Frequency stability / variation of ambient temperature	§2.1055, §90.213 §22.355	< 2.5 ppm	PASS

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP (Only 15 MHz B.W)	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §90.691 §22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

## 7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				814.7 MHz		823.3 MHz		
				dBm	W	dBm	W	
1.4	QPSK	1	0	24.00	0.251	24.10	0.257	100
		1	3	23.96	0.249	24.09	0.256	100
		1	5	23.96	0.249	24.15	0.260	100
		3	0	24.01	0.252	24.17	0.261	100
		3	1	24.00	0.251	24.18	0.262	100
		3	3	23.99	0.251	24.10	0.257	100
		6	0	23.01	0.200	23.11	0.205	100
	16QAM	1	0	23.18	0.208	23.31	0.214	100
		1	3	23.20	0.209	23.51	0.224	100
		1	5	23.19	0.208	23.46	0.222	100
		3	0	23.04	0.201	23.15	0.207	100
		3	1	22.99	0.199	23.21	0.209	100
		3	3	22.97	0.198	23.11	0.205	100
		6	0	22.08	0.161	22.26	0.168	100
	64QAM	1	0	22.10	0.162	22.41	0.174	100
		1	3	22.17	0.165	22.40	0.174	100
		1	5	22.14	0.164	22.31	0.170	100
		3	0	22.11	0.163	22.20	0.166	100
		3	1	22.08	0.161	22.28	0.169	100
		3	3	22.07	0.161	22.27	0.169	100
		6	0	20.95	0.124	21.13	0.130	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				815.5 MHz		822.5 MHz		
				dBm	W	dBm	W	
3	QPSK	1	0	23.97	0.249	24.12	0.258	100
		1	7	23.98	0.250	24.18	0.262	100
		1	14	23.95	0.248	24.16	0.261	100
		8	0	23.02	0.200	23.18	0.208	100
		8	3	22.99	0.199	23.12	0.205	100
		8	7	22.96	0.198	23.22	0.210	100
		15	0	22.99	0.199	23.20	0.209	100
	16QAM	1	0	23.14	0.206	23.43	0.220	100
		1	7	23.25	0.211	23.39	0.218	100
		1	14	23.20	0.209	23.40	0.219	100
		8	0	22.08	0.161	22.20	0.166	100
		8	3	22.06	0.161	22.23	0.167	100
		8	7	22.06	0.161	22.27	0.169	100
		15	0	22.01	0.159	22.22	0.167	100
	64QAM	1	0	22.20	0.166	22.31	0.170	100
		1	7	22.17	0.165	22.39	0.173	100
		1	14	22.15	0.164	22.40	0.174	100
		8	0	21.00	0.126	21.18	0.131	100
		8	3	20.98	0.125	21.20	0.132	100
		8	7	20.94	0.124	21.20	0.132	100
		15	0	20.94	0.124	21.17	0.131	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				816.5 MHz		821.5 MHz		
				dBm	W	dBm	W	
5	QPSK	1	0	24.06	0.255	24.16	0.261	100
		1	12	24.04	0.254	24.28	0.268	101
		1	24	24.00	0.251	24.21	0.264	102
		12	0	23.08	0.203	23.24	0.211	103
		12	6	23.01	0.200	23.22	0.210	104
		12	11	22.98	0.199	23.21	0.209	105
		25	0	23.03	0.201	23.20	0.209	106
	16QAM	1	0	23.32	0.215	23.45	0.221	107
		1	12	23.20	0.209	23.52	0.225	108
		1	24	23.18	0.208	23.40	0.219	109
		12	0	22.03	0.160	22.21	0.166	110
		12	6	21.95	0.157	22.18	0.165	111
		12	11	21.96	0.157	22.19	0.166	112
		25	0	21.99	0.158	22.25	0.168	113
	64QAM	1	0	22.22	0.167	22.29	0.169	114
		1	12	22.20	0.166	22.34	0.171	115
		1	24	22.16	0.164	22.31	0.170	116
		12	0	21.06	0.128	21.23	0.133	117
		12	6	20.97	0.125	21.15	0.130	118
		12	11	20.97	0.125	21.20	0.132	119
		25	0	20.97	0.125	21.18	0.131	120



Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				819 MHz		
				dBm	W	
10	QPSK	1	0	24.13	0.259	100
		1	24	24.24	0.265	100
		1	49	24.22	0.264	100
		25	0	23.22	0.210	100
		25	12	23.24	0.211	100
		25	24	23.19	0.208	100
		50	0	23.25	0.211	100
	16QAM	1	0	23.31	0.214	100
		1	24	23.50	0.224	100
		1	49	23.46	0.222	100
		25	0	22.20	0.166	100
		25	12	22.20	0.166	100
		25	24	22.19	0.166	100
		50	0	22.21	0.166	100
	64QAM	1	0	22.18	0.165	100
		1	24	22.37	0.173	100
		1	49	22.35	0.172	100
		25	0	21.20	0.132	100
		25	12	21.18	0.131	100
		25	24	21.17	0.131	100
		50	0	21.19	0.132	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				821.5 MHz		
				dBm	W	
15	QPSK	1	0	24.03	0.253	100
		1	36	24.22	0.264	100
		1	74	24.21	0.264	100
		36	0	23.17	0.207	100
		36	18	23.15	0.207	100
		36	39	23.20	0.209	100
		75	0	23.22	0.210	100
	16QAM	1	0	23.39	0.218	100
		1	36	23.55	0.226	100
		1	74	23.52	0.225	100
		36	0	22.16	0.164	100
		36	18	22.14	0.164	100
		36	39	22.19	0.166	100
		75	0	22.20	0.166	100
	64QAM	1	0	22.15	0.164	100
		1	36	22.42	0.175	100
		1	74	22.41	0.174	100
		36	0	21.10	0.129	100
		36	18	21.17	0.131	100
		36	39	21.16	0.131	100
		75	0	21.13	0.130	100

**8.2 EFFECTIVE RADIATED POWER**

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
814.7	LTE B26/ 1.4 MHz	QPSK	-32.13	30.41	-10.29	1.38	H	< 100	0.075	18.74
		16QAM	-32.91	29.63	-10.29	1.38	H		0.063	17.96
		64QAM	-33.97	28.57	-10.29	1.38	H		0.049	16.90
823.3		QPSK	-31.27	31.78	-10.25	1.39	H		0.103	20.14
		16QAM	-31.97	31.08	-10.25	1.39	H		0.088	19.44
		64QAM	-33.10	29.95	-10.25	1.39	H		0.068	18.31

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
815.5	LTE B26/ 3 MHz	QPSK	-31.95	30.63	-10.29	1.39	H	< 100	0.079	18.96
		16QAM	-32.75	29.83	-10.29	1.39	H		0.065	18.16
		64QAM	-33.80	28.78	-10.29	1.39	H		0.051	17.11
822.5		QPSK	-31.26	31.85	-10.26	1.39	H		0.105	20.21
		16QAM	-31.98	31.13	-10.26	1.39	H		0.089	19.49
		64QAM	-33.10	30.01	-10.26	1.39	H		0.069	18.37

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
816.5	LTE B26/ 5 MHz	QPSK	-31.63	31.06	-10.28	1.39	H	< 100	0.087	19.39
		16QAM	-32.43	30.26	-10.28	1.39	H		0.072	18.59
		64QAM	-33.49	29.20	-10.28	1.39	H		0.057	17.53
821.5		QPSK	-31.24	31.80	-10.26	1.39	H		0.104	20.15
		16QAM	-31.97	31.07	-10.26	1.39	H		0.088	19.42
		64QAM	-33.10	29.94	-10.26	1.39	H		0.068	18.29

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
819.0	LTE B26/ 10 MHz	QPSK	-31.31	31.57	-10.27	1.39	H	< 100	0.098	19.91
		16QAM	-32.01	30.87	-10.27	1.39	H		0.083	19.21
		64QAM	-33.16	29.72	-10.27	1.39	H		0.064	18.06

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
821.5	LTE B26/ 15 MHz	QPSK	-31.20	31.84	-10.26	1.39	H	< 7.00	0.105	20.19
		16QAM	-31.99	31.05	-10.26	1.39	H		0.087	19.40
		64QAM	-33.07	29.97	-10.26	1.39	H		0.068	18.32

**Note**

1. Limit: None (for reporting purposes only)

**8.3 RADIATED SPURIOUS EMISSIONS**

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26705 (815.5)	1 631.00	-49.61	9.50	-59.57	1.98	V	-52.05	-13.00
	2 446.50	-45.56	10.28	-50.04	2.47	V	-42.22	-13.00
	3 262.00	-53.04	11.86	-54.25	2.88	V	-45.27	-13.00
26775 (822.5)	1 645.00	-53.66	9.65	-64.01	1.99	H	-56.34	-13.00
	2 467.50	-52.95	10.46	-57.60	2.47	V	-49.61	-13.00
	3 290.00	-53.47	12.04	-54.87	2.88	V	-45.71	-13.00

**8.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 26	1.4 MHz	823.3	QPSK	6	0	1.0949
			16QAM			1.0892
			64QAM			1.0946
	3 MHz	822.5	QPSK	15		2.7046
			16QAM			2.6951
			64QAM			2.7002
	5 MHz	821.5	QPSK	25		4.5150
			16QAM			4.5009
			64QAM			4.5051
	10 MHz	819.0	QPSK	50		8.9985
			16QAM			8.9844
			64QAM			8.9905
	15 MHz	821.5	QPSK	75		13.451
			16QAM			13.464
			64QAM			13.466

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 45 ~ 59.

**8.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	814.7	2.6950	27.976	-67.443	-39.467	-13.00
		823.3	3.7064	27.976	-67.036	-39.060	
	3	815.5	3.7329	27.976	-67.132	-39.156	
		822.5	3.6900	27.976	-67.073	-39.097	
	5	816.5	3.7104	27.976	-67.441	-39.465	
		821.5	3.7054	27.976	-66.955	-38.979	
	10	819.0	3.7159	27.976	-67.328	-39.352	
	15	821.5	3.6995	27.976	-66.745	-38.769	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 80 ~ 87.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


**8.6 CHANNEL EDGE**

- Plots of the EUT's Band Edge are shown Page 60 ~ 79.

**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 814,700,000 Hz
- ▣ CHANNEL: 26697(1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	814 700 004	0.0	0.000 000	0.000
100 %		-30	814 699 998	-6.3	-0.000 001	-0.008
100 %		-20	814 700 000	-4.0	0.000 000	-0.005
100 %		-10	814 700 008	4.2	0.000 001	0.005
100 %		0	814 700 009	4.3	0.000 001	0.005
100 %		+10	814 700 007	2.7	0.000 000	0.003
100 %		+30	814 700 008	3.8	0.000 000	0.005
100 %		+40	814 700 002	-2.2	0.000 000	-0.003
100 %		+50	814 700 007	2.7	0.000 000	0.003
Batt. Endpoint		3.400	+20	814 700 001	-2.8	0.000 000

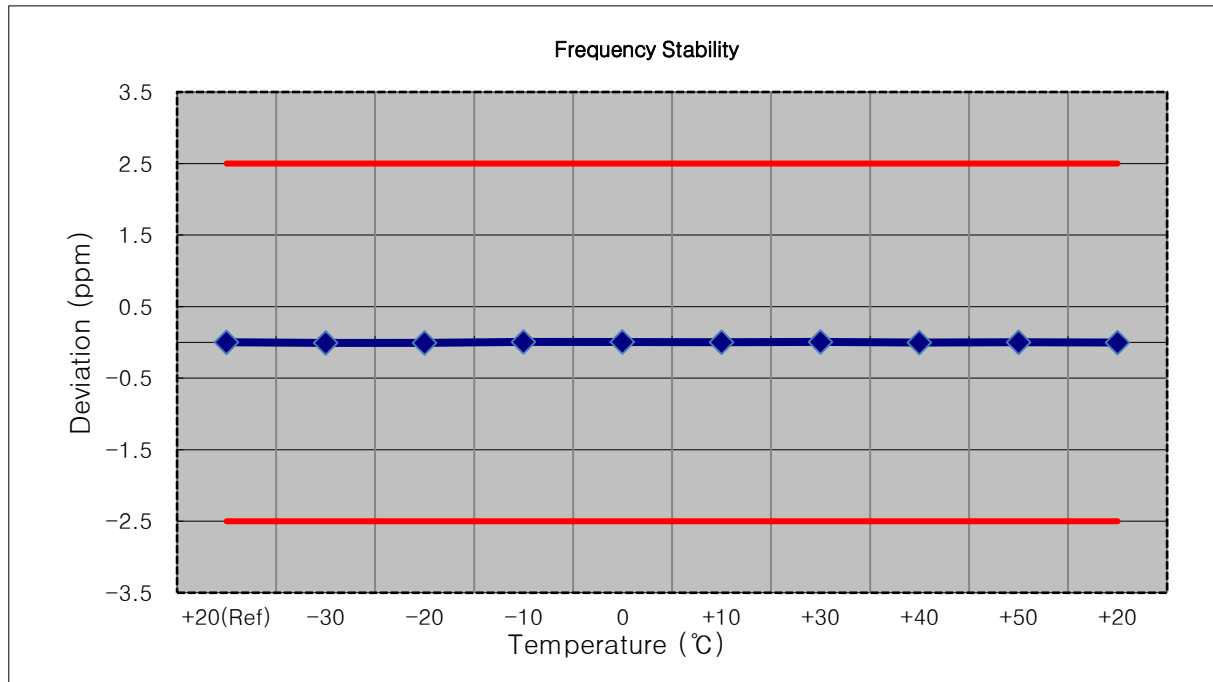




- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 815,500,000 Hz
- ▣ CHANNEL: 26705(3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	815 500 006	0.0	0.000 000	0.000
100 %		-30	815 499 996	-10.5	-0.000 001	-0.013
100 %		-20	815 500 013	6.7	0.000 001	0.008
100 %		-10	815 500 000	-6.4	-0.000 001	-0.008
100 %		0	815 499 999	-6.8	-0.000 001	-0.008
100 %		+10	815 500 000	-6.3	-0.000 001	-0.008
100 %		+30	815 500 010	4.3	0.000 001	0.005
100 %		+40	815 500 013	6.8	0.000 001	0.008
100 %		+50	815 500 012	6.0	0.000 001	0.007
Batt. Endpoint		3.400	+20	815 499 995	-11.3	-0.000 001

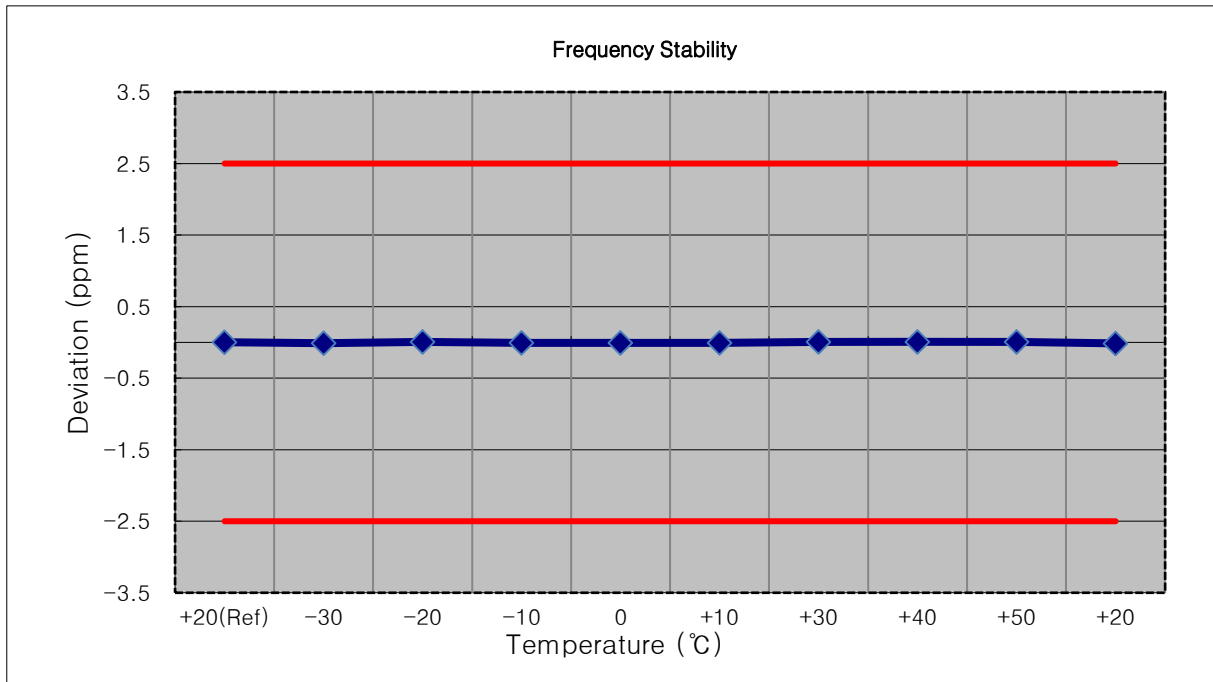


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 816,500,000 Hz
- ▣ CHANNEL: 26715(5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	816 499 997	0.0	0.000 000	0.000
100 %		-30	816 499 994	-2.5	0.000 000	-0.003
100 %		-20	816 499 992	-4.4	-0.000 001	-0.005
100 %		-10	816 499 993	-3.7	0.000 000	-0.005
100 %		0	816 499 994	-2.8	0.000 000	-0.003
100 %		+10	816 499 994	-2.8	0.000 000	-0.003
100 %		+30	816 500 000	3.3	0.000 000	0.004
100 %		+40	816 499 994	-2.9	0.000 000	-0.004
100 %		+50	816 499 992	-5.0	-0.000 001	-0.006
Batt. Endpoint		3.400	+20	816 499 990	-6.4	-0.000 001

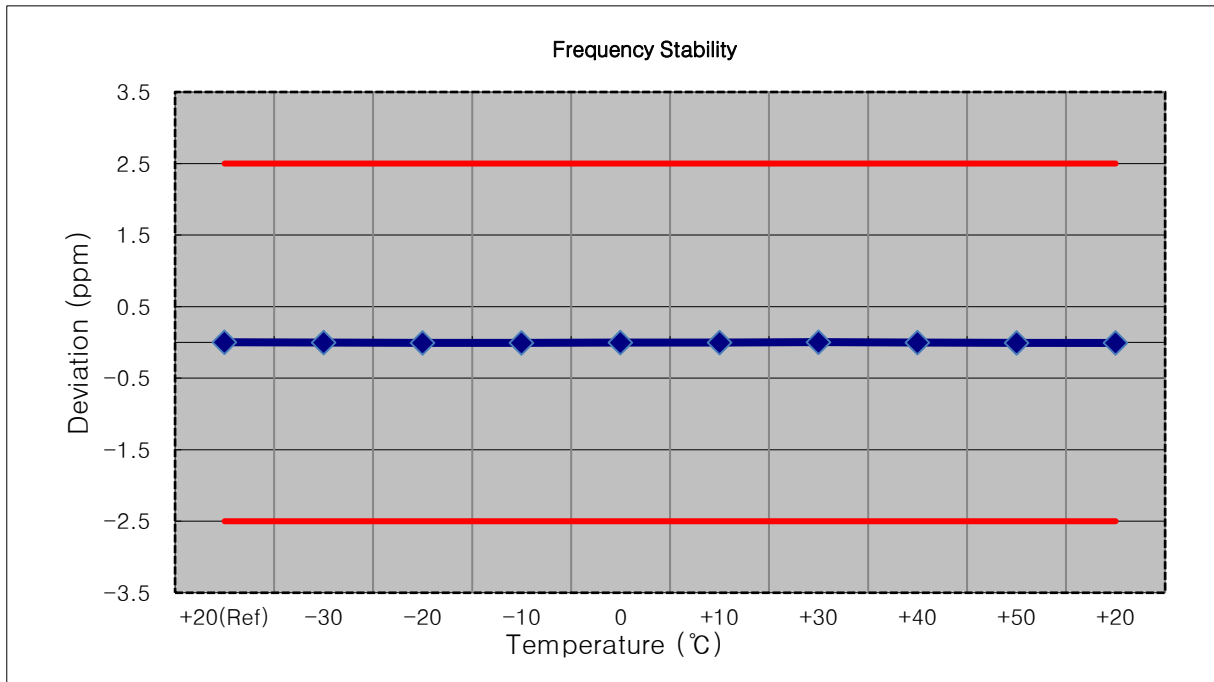


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 819,000,000 Hz
- ▣ CHANNEL: 26740(10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	818 999 997	0.0	0.000 000	0.000
100 %		-30	818 999 994	-3.8	0.000 000	-0.005
100 %		-20	818 999 995	-2.0	0.000 000	-0.002
100 %		-10	818 999 994	-3.1	0.000 000	-0.004
100 %		0	819 000 003	5.8	0.000 001	0.007
100 %		+10	819 000 001	3.4	0.000 000	0.004
100 %		+30	819 000 000	2.3	0.000 000	0.003
100 %		+40	818 999 993	-4.0	0.000 000	-0.005
100 %		+50	818 999 994	-3.3	0.000 000	-0.004
Batt. Endpoint	3.400	+20	819 000 001	3.7	0.000 000	0.005

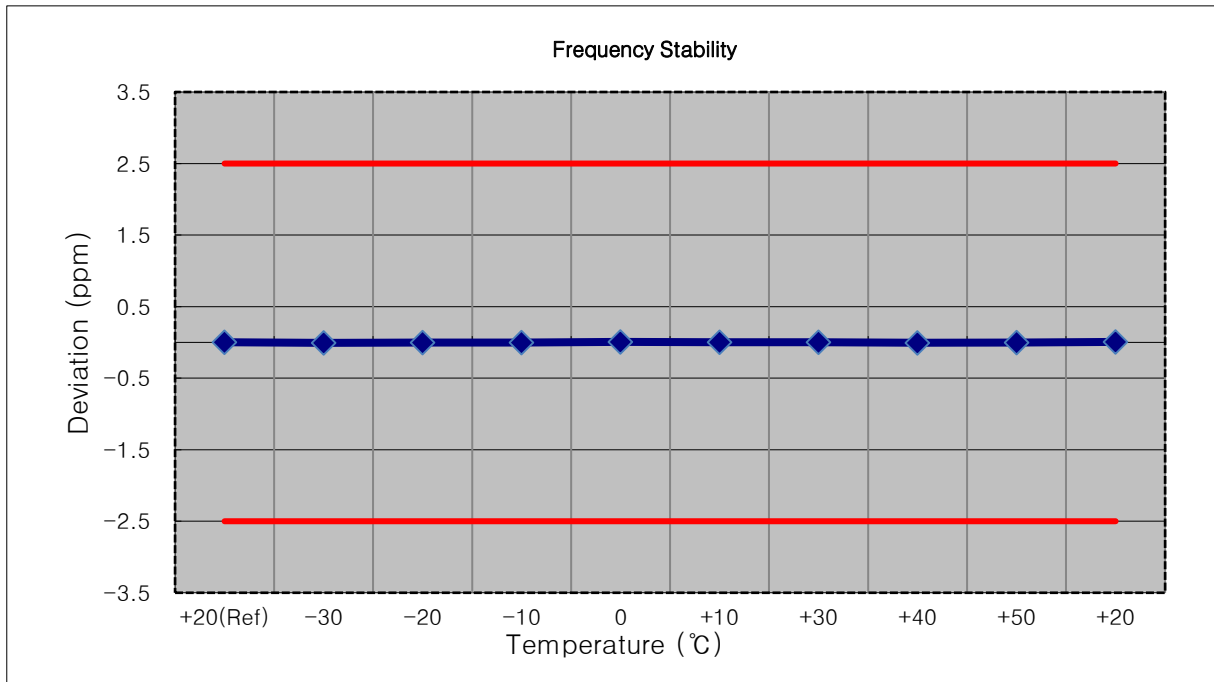

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 821,500,000 Hz
- ▣ CHANNEL: 26765(15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	821 500 004	0.0	0.000 000	0.000
100 %		-30	821 500 007	3.4	0.000 000	0.004
100 %		-20	821 500 007	2.7	0.000 000	0.003
100 %		-10	821 500 002	-1.8	0.000 000	-0.002
100 %		0	821 499 999	-5.1	-0.000 001	-0.006
100 %		+10	821 500 000	-4.3	-0.000 001	-0.005
100 %		+30	821 500 007	2.6	0.000 000	0.003
100 %		+40	821 500 007	3.3	0.000 000	0.004
100 %		+50	821 500 002	-2.2	0.000 000	-0.003
Batt. Endpoint		3.400	+20	821 500 001	-2.5	0.000 000

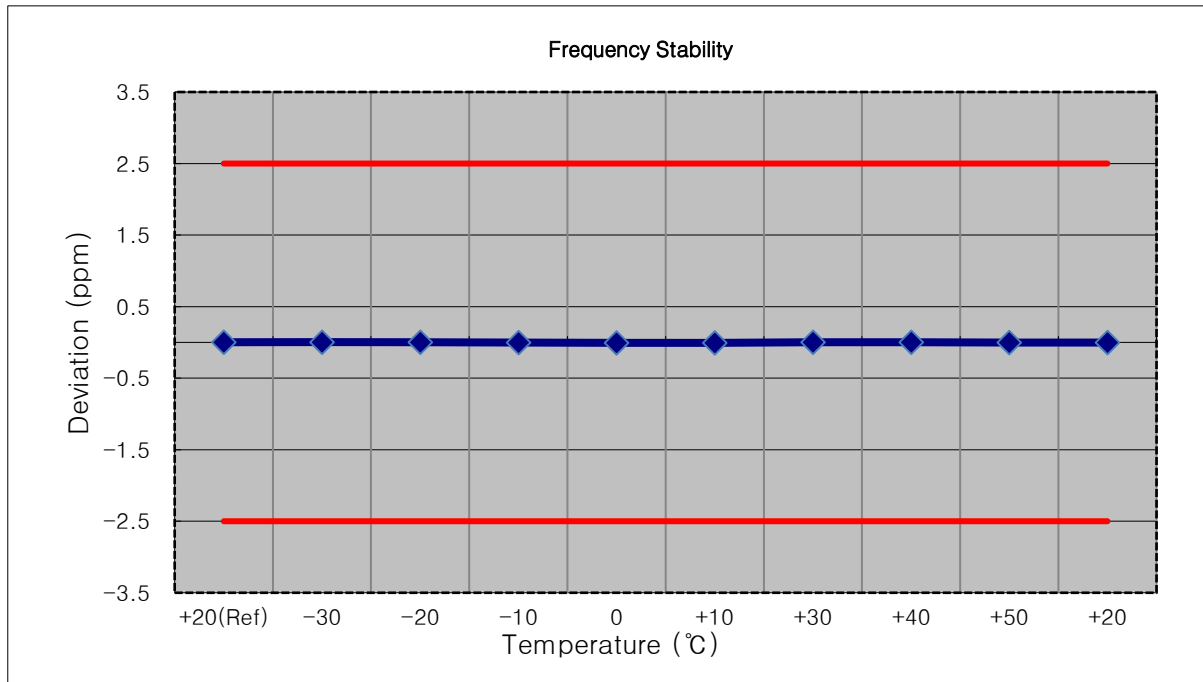

**8.8 STADDLE CHANNEL**

**8.8.1 CONDUCTED OUTPUT POWER**

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
1.4	QPSK	1	0	23.98	0.250	100
		1	3	23.94	0.248	100
		1	5	23.94	0.248	100
		3	0	23.99	0.251	100
		3	1	23.99	0.251	100
		3	3	23.96	0.249	100
		6	0	23.00	0.200	100
	16QAM	1	0	23.15	0.207	100
		1	3	23.18	0.208	100
		1	5	23.17	0.207	100
		3	0	23.02	0.200	100
		3	1	22.97	0.198	100
		3	3	22.95	0.197	100
		6	0	22.06	0.161	100
	64QAM	1	0	22.08	0.161	100
		1	3	22.15	0.164	100
		1	5	22.12	0.163	100
		3	0	22.09	0.162	100
		3	1	22.06	0.161	100
		3	3	22.05	0.160	100
		6	0	20.93	0.124	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
3	QPSK	1	0	23.95	0.248	100
		1	7	23.96	0.249	100
		1	14	23.94	0.248	100
		8	0	23.00	0.200	100
		8	3	22.97	0.198	100
		8	7	22.94	0.197	100
		15	0	22.97	0.198	100
	16QAM	1	0	23.12	0.205	100
		1	7	23.23	0.210	100
		1	14	23.18	0.208	100
		8	0	22.06	0.161	100
		8	3	22.04	0.160	100
		8	7	22.05	0.160	100
		15	0	22.00	0.158	100
	64QAM	1	0	22.18	0.165	100
		1	7	22.15	0.164	100
		1	14	22.13	0.163	100
		8	0	20.98	0.125	100
		8	3	20.96	0.125	100
		8	7	20.92	0.124	100
		15	0	20.92	0.124	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
5	QPSK	1	0	24.04	0.254	100
		1	12	24.02	0.252	100
		1	24	23.98	0.250	100
		12	0	23.06	0.202	100
		12	6	23.00	0.200	100
		12	11	22.96	0.198	100
		25	0	23.01	0.200	100
	16QAM	1	0	23.30	0.214	100
		1	12	23.18	0.208	100
		1	24	23.15	0.207	100
		12	0	22.00	0.158	100
		12	6	21.93	0.156	100
		12	11	21.94	0.156	100
		25	0	21.95	0.157	100
	64QAM	1	0	22.20	0.166	100
		1	12	22.18	0.165	100
		1	24	22.14	0.164	100
		12	0	21.04	0.127	100
		12	6	20.95	0.124	100
		12	11	20.95	0.124	100
		25	0	20.94	0.124	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
10	QPSK	1	0	23.98	0.250	100
		1	24	24.05	0.254	100
		1	49	24.07	0.255	100
		25	0	22.99	0.199	100
		25	12	23.03	0.201	100
		25	24	23.11	0.205	100
		50	0	23.10	0.204	100
	16QAM	1	0	23.31	0.214	100
		1	24	23.33	0.215	100
		1	49	23.25	0.211	100
		25	0	22.02	0.159	100
		25	12	22.03	0.160	100
		25	24	22.12	0.163	100
		50	0	22.05	0.160	100
	64QAM	1	0	22.12	0.163	100
		1	24	22.17	0.165	100
		1	49	22.10	0.162	100
		25	0	21.02	0.126	100
		25	12	21.01	0.126	100
		25	24	21.07	0.128	100
		50	0	21.05	0.127	100



**8.8.2 EFFECTIVE RADIATED POWER**

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.0	LTE B26/ 1.4 MHz	QPSK	-31.23	31.70	-10.25	1.39	H	< 7.00	0.101	20.06
		16QAM	-31.94	30.99	-10.25	1.39	H		0.086	19.35
		64QAM	-33.07	29.86	-10.25	1.39	H		0.066	18.22

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.0	LTE B26/ 3 MHz	QPSK	-31.17	31.76	-10.25	1.39	H	< 7.00	0.103	20.12
		16QAM	-31.94	30.99	-10.25	1.39	H		0.086	19.35
		64QAM	-33.04	29.89	-10.25	1.39	H		0.067	18.25

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.0	LTE B26/ 5 MHz	QPSK	-31.12	31.81	-10.25	1.39	H	< 7.00	0.104	20.17
		16QAM	-31.92	31.01	-10.25	1.39	H		0.086	19.37
		64QAM	-33.00	29.93	-10.25	1.39	H		0.067	18.29

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.0	LTE B26/ 10 MHz	QPSK	-31.16	31.77	-10.25	1.39	H	< 7.00	0.103	20.13
		16QAM	-31.94	30.99	-10.25	1.39	H		0.086	19.35
		64QAM	-33.03	29.90	-10.25	1.39	H		0.067	18.26

**8.8.3 RADIATED SPURIOUS EMISSIONS**

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26790 (824.0)	1 648.00	-52.59	9.70	-62.91	1.99	H	-55.20	-13.00
	2 472.00	-55.06	10.46	-59.71	2.47	V	-51.72	-13.00
	3 296.00	-53.26	12.07	-54.75	2.89	H	-45.56	-13.00

**8.8.4 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	824.0	3.7089	27.976	-66.899	-38.923	-13.00
	3		3.6750	27.976	-67.177	-39.201	
	5		3.6810	27.976	-67.031	-39.055	
	10		3.6955	27.976	-66.994	-39.018	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 89 ~ 92.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

**8.8.5 CHANNEL EDGE(Part90)**

- Test Channel : 26790(824.0MHz)

Plots of the EUT's Band Edge are shown Page 93 ~ 104.


**8.8.6 BAND EDGE(Part22)**

- Test Channel : 26790(824.0 MHz)


- Plots of the EUT's Band Edge are shown Page 105 ~ 112.

## 9. TEST PLOTS


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 QPSK RB 6\_0)

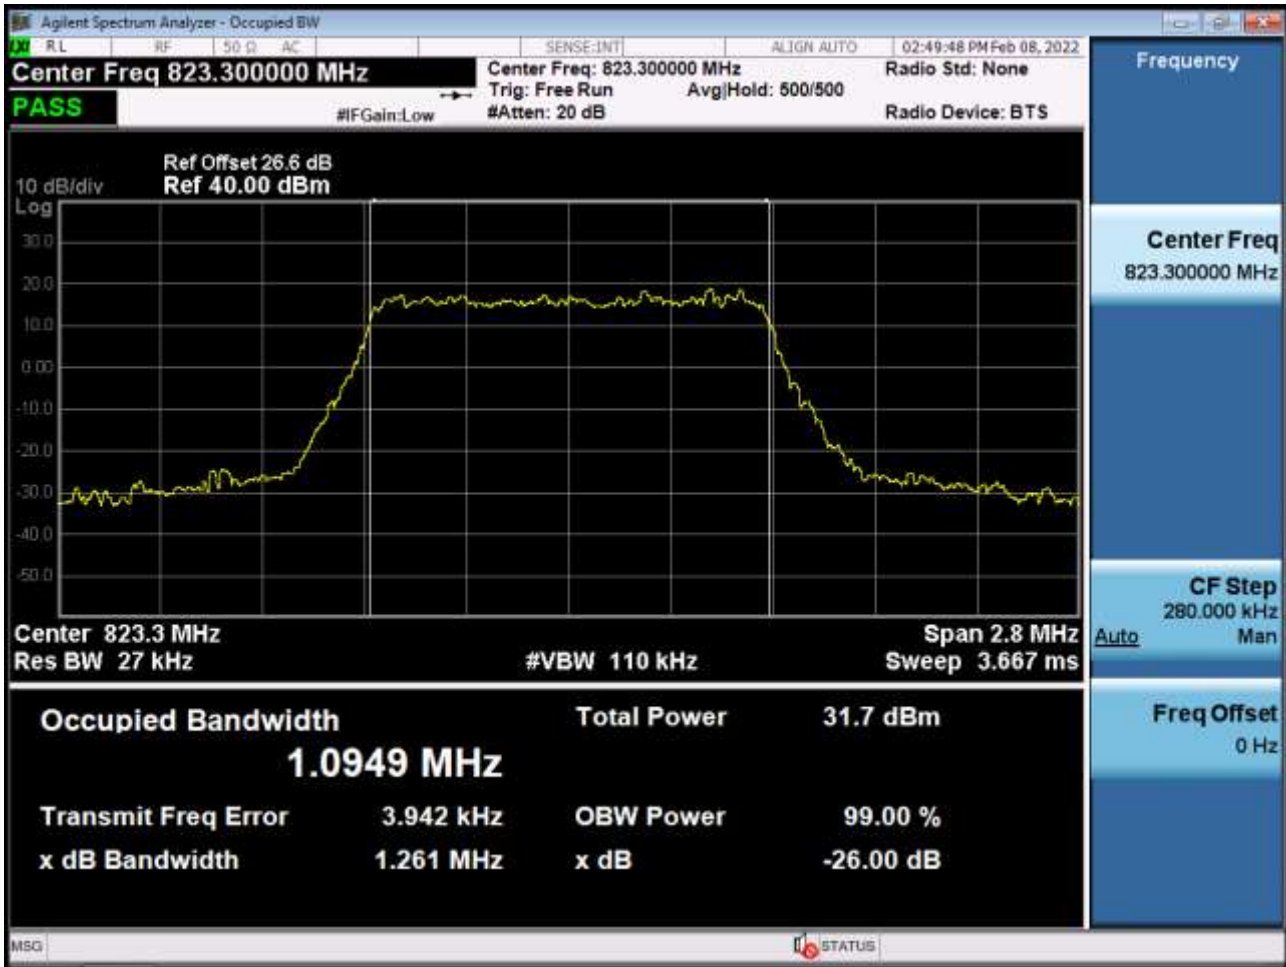


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 16QAM RB 6\_0)

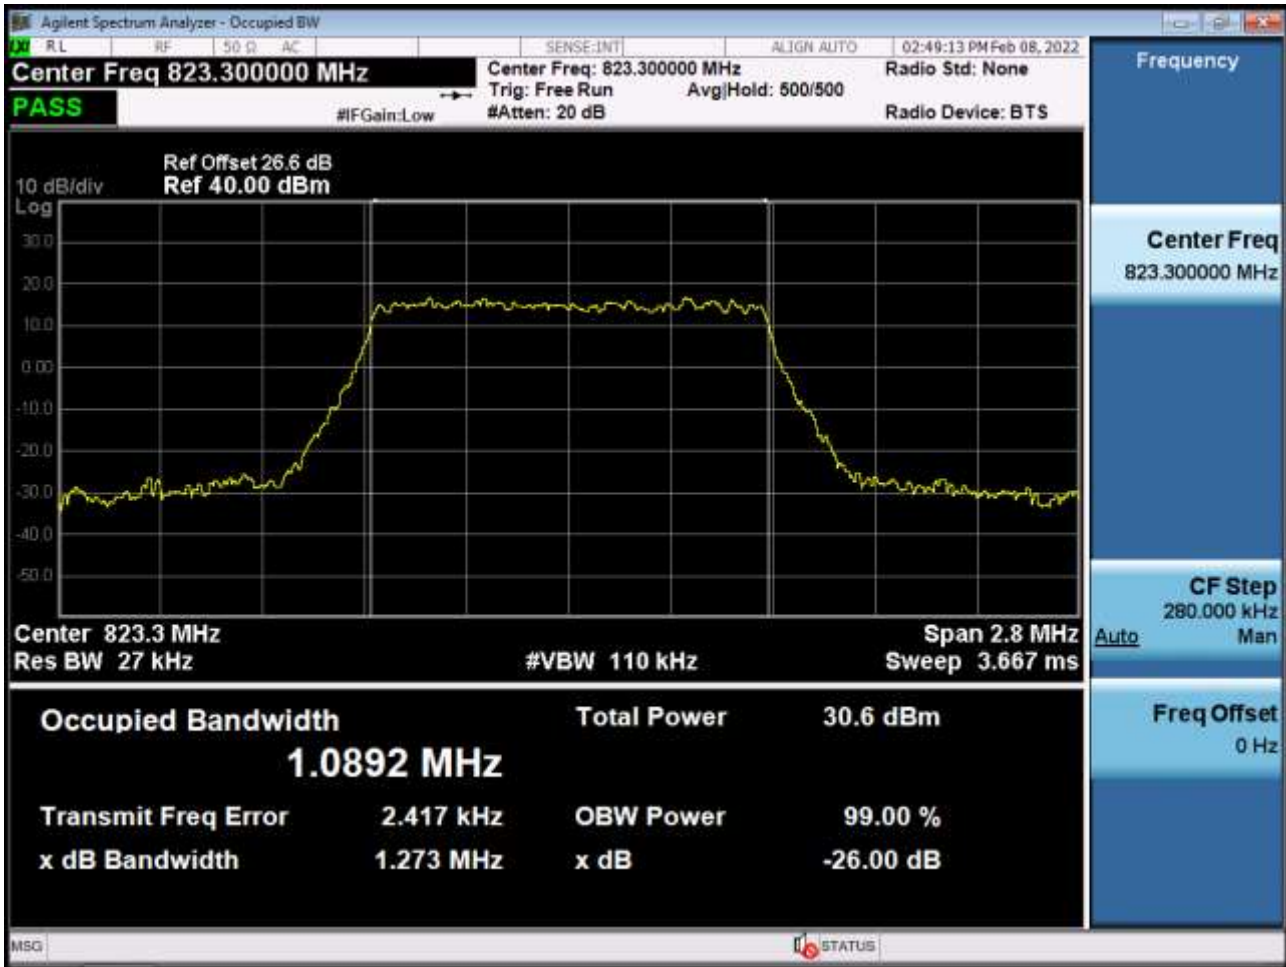

BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 64QAM RB 6\_0)

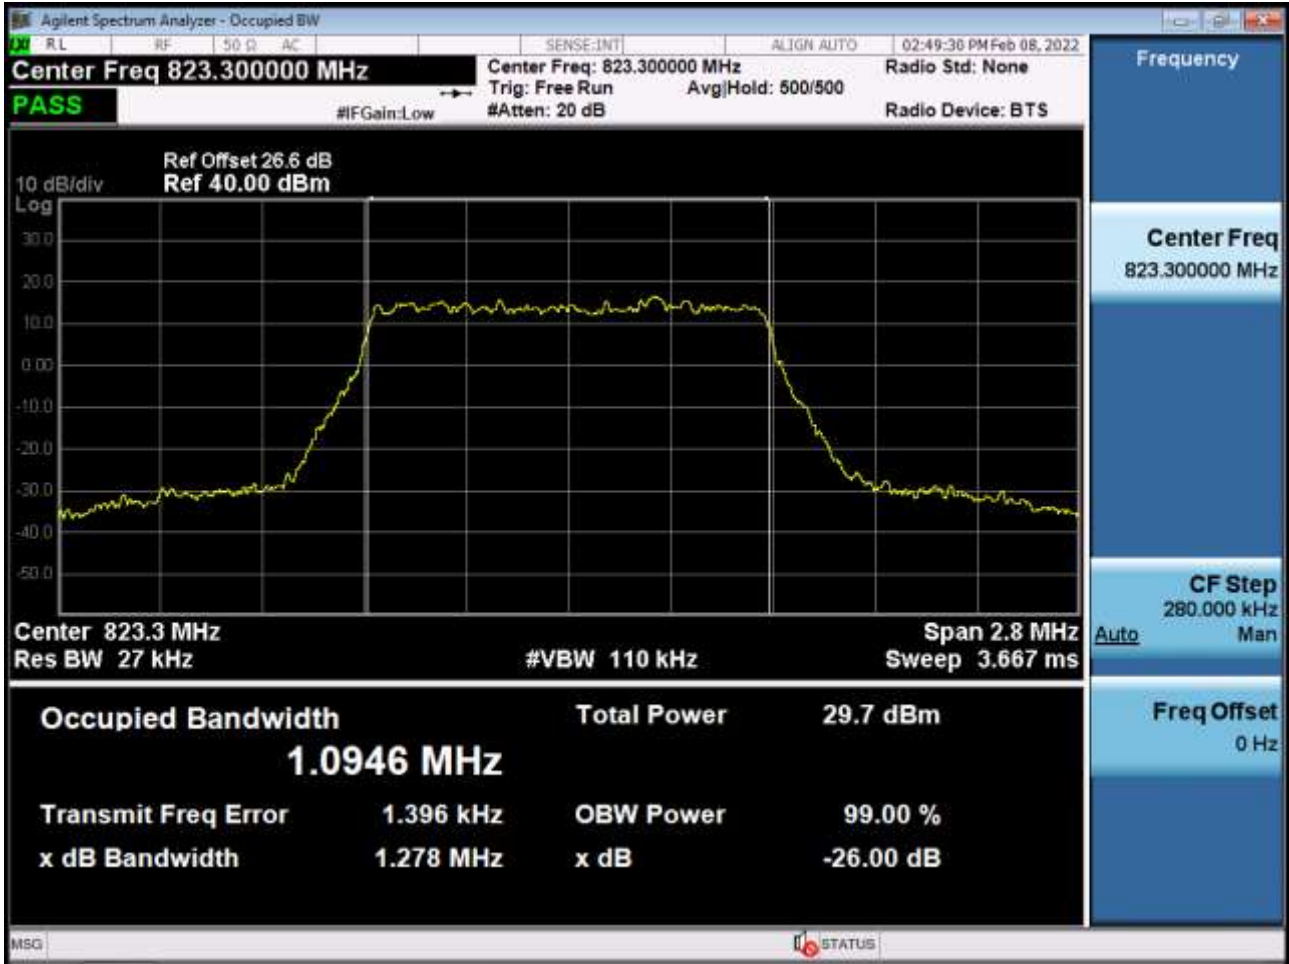


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 QPSK RB 15\_0)

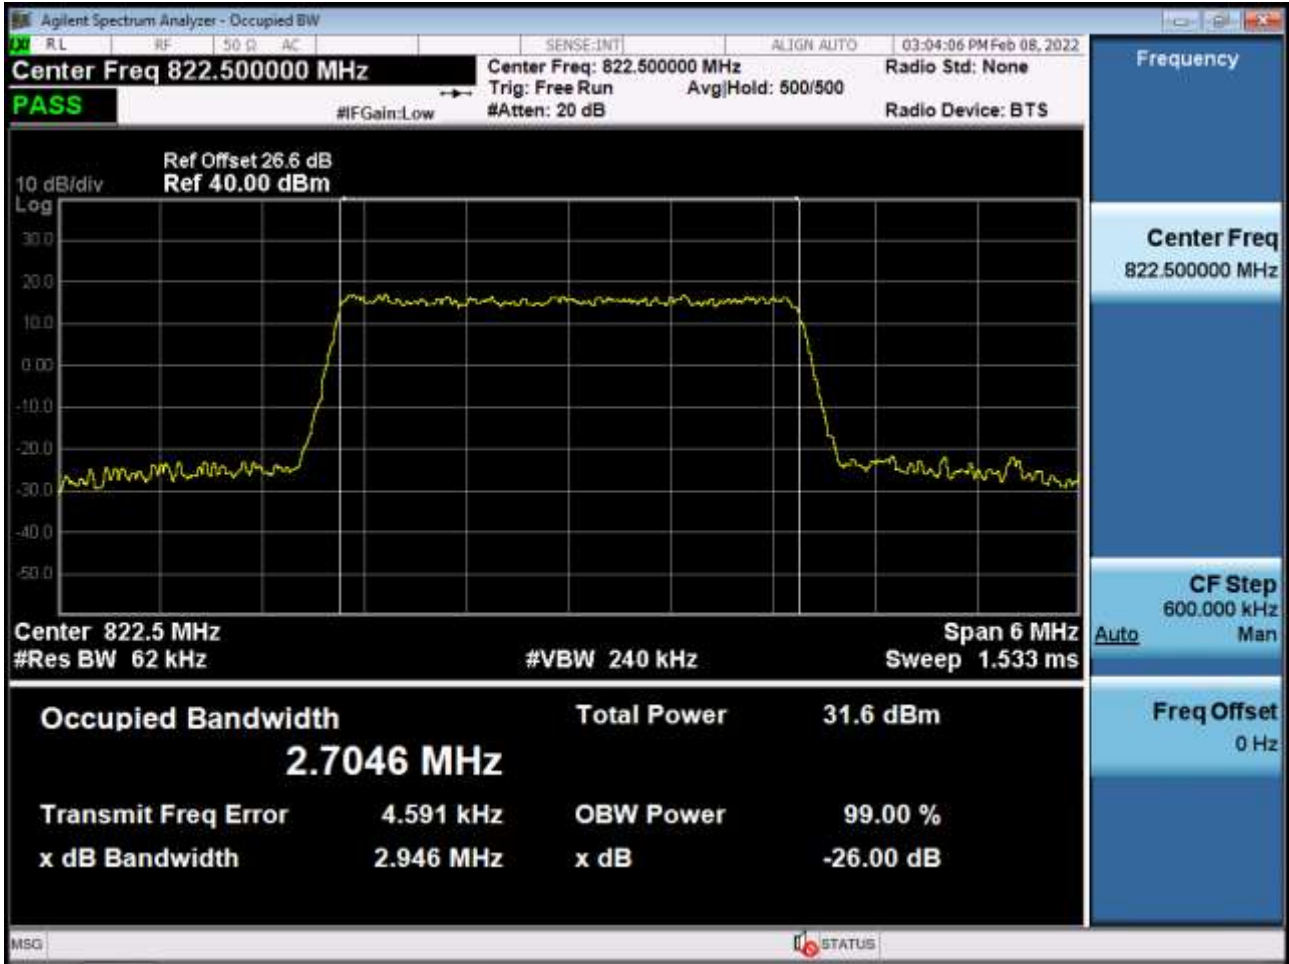





BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 16QAM RB 15\_0)

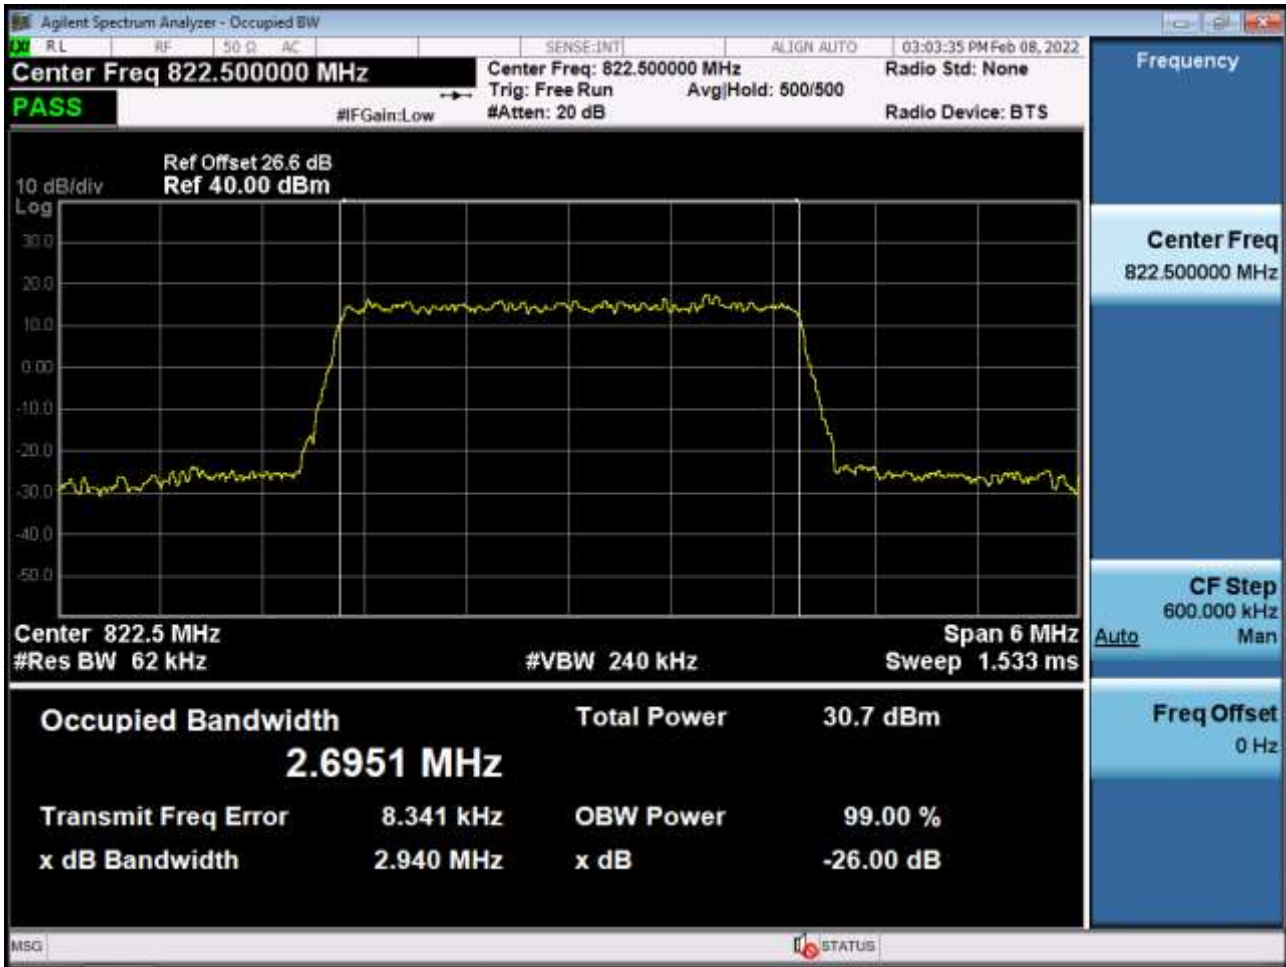


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 64QAM RB 15\_0)

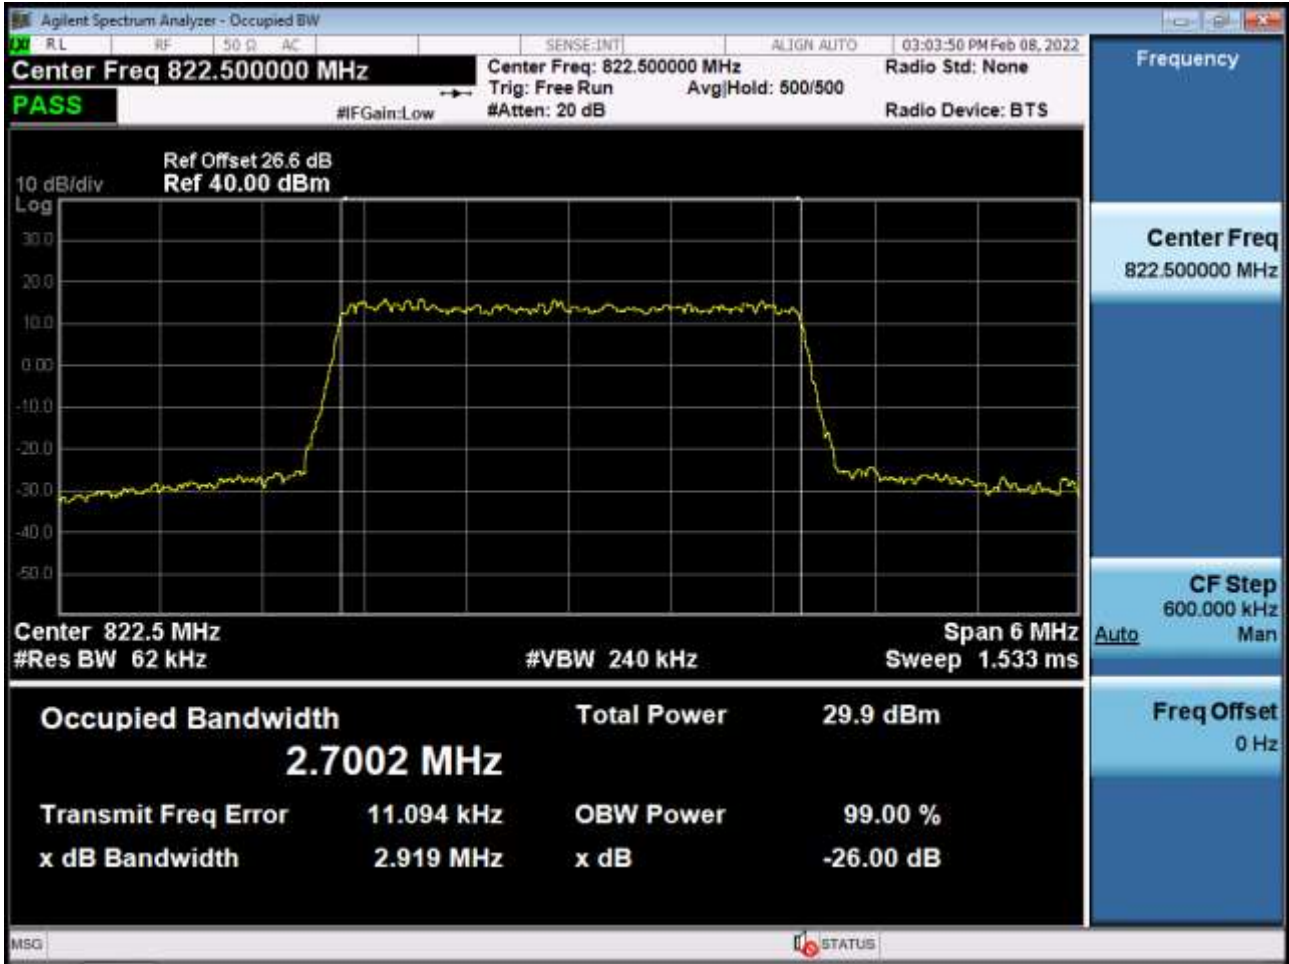


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 QPSK RB 25\_0)

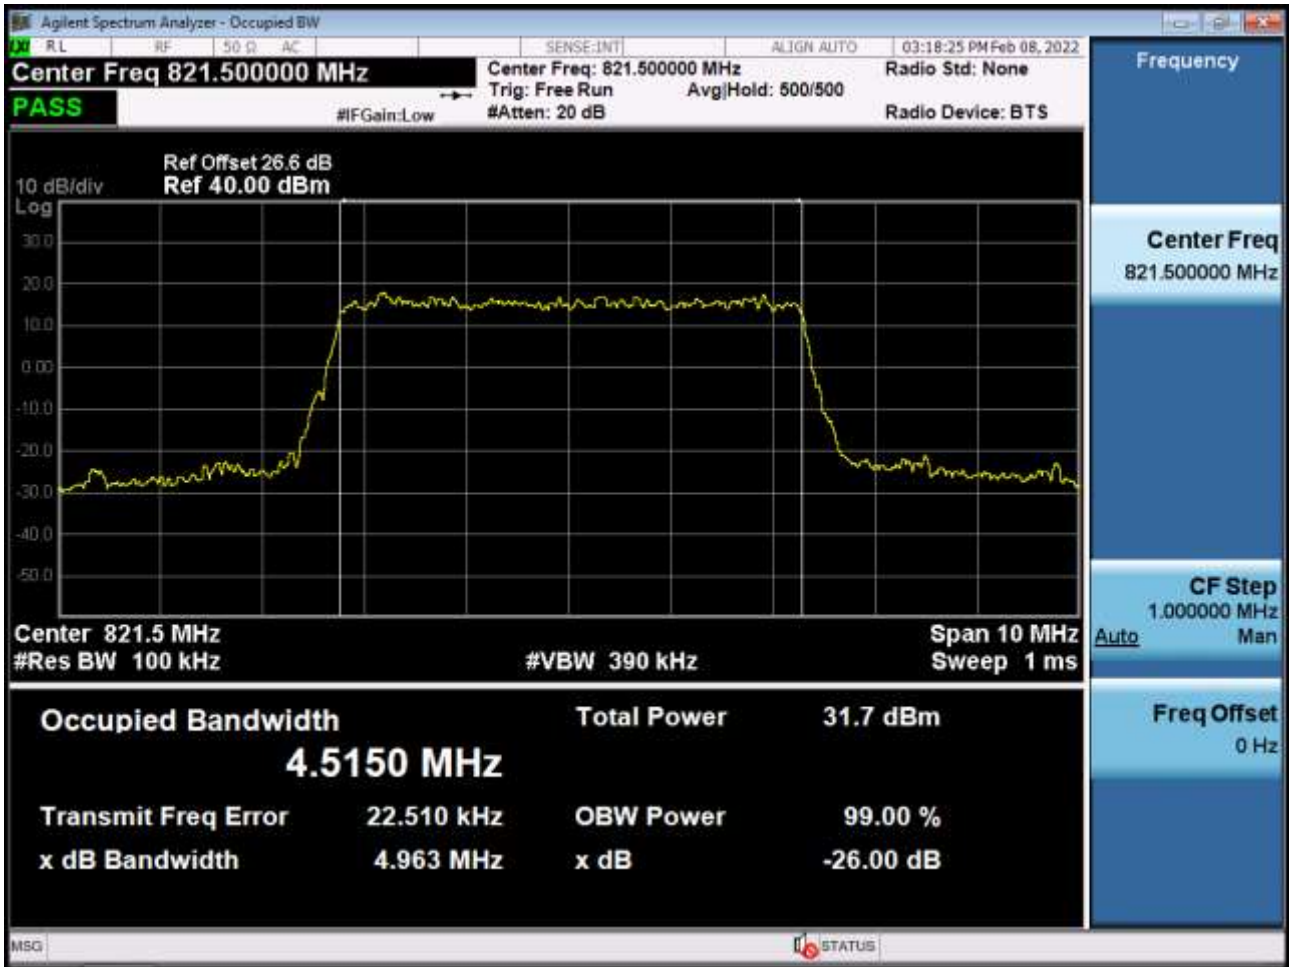


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 16QAM RB 25\_0)

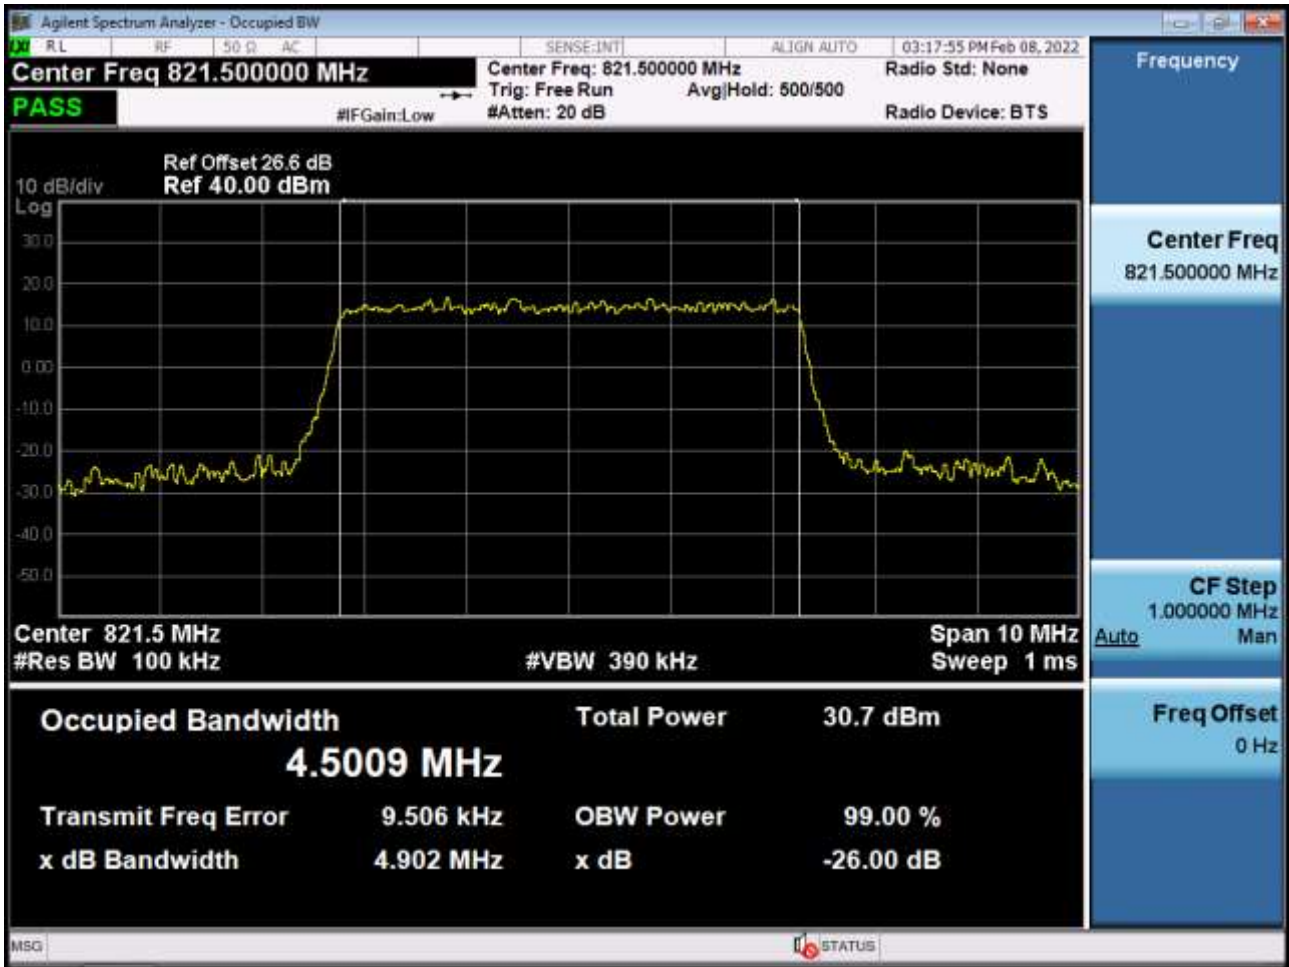


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 64QAM RB 25\_0)

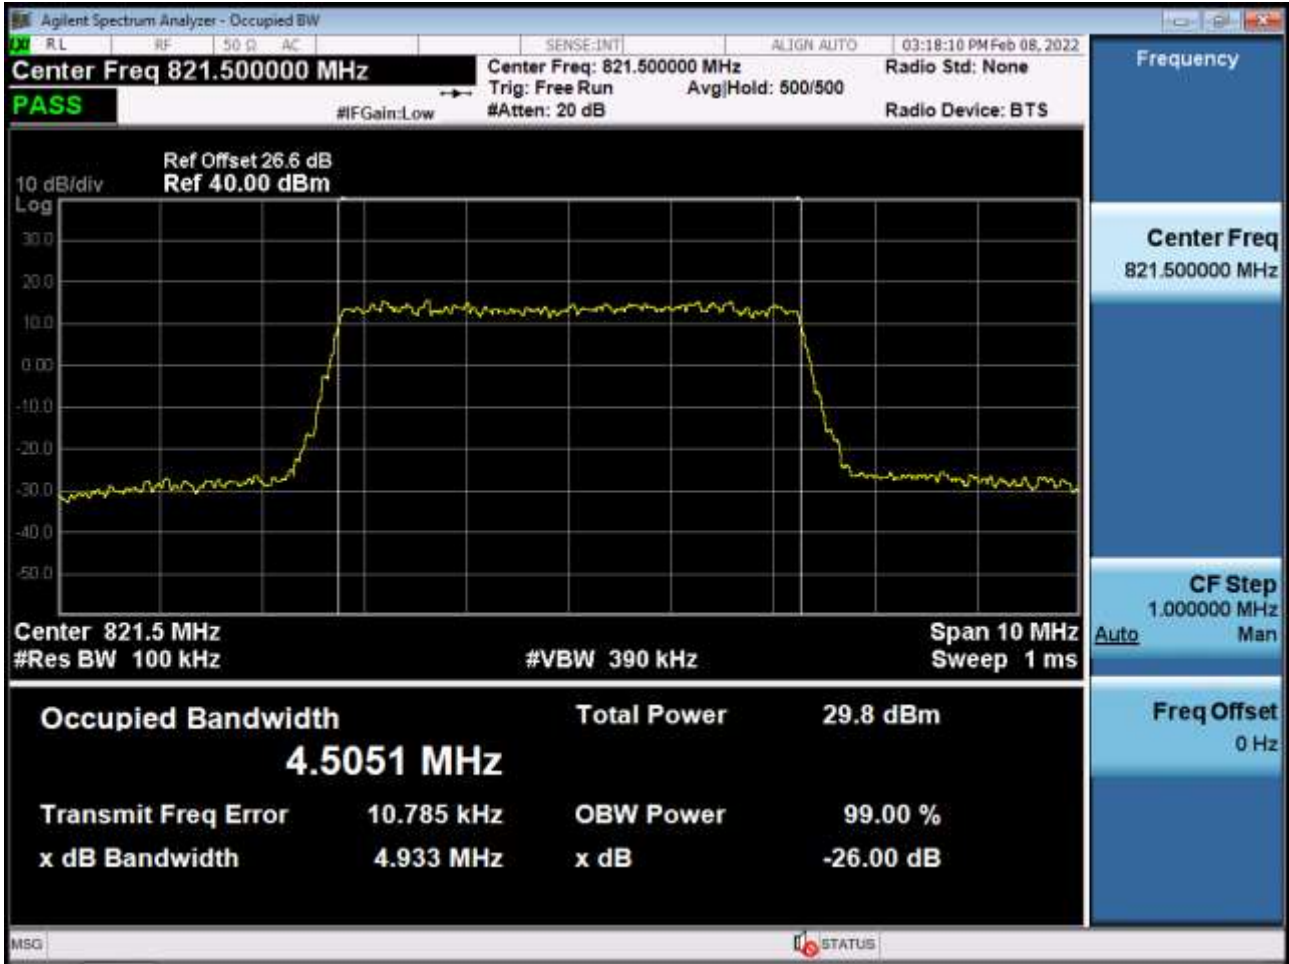


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 QPSK RB 50\_0)

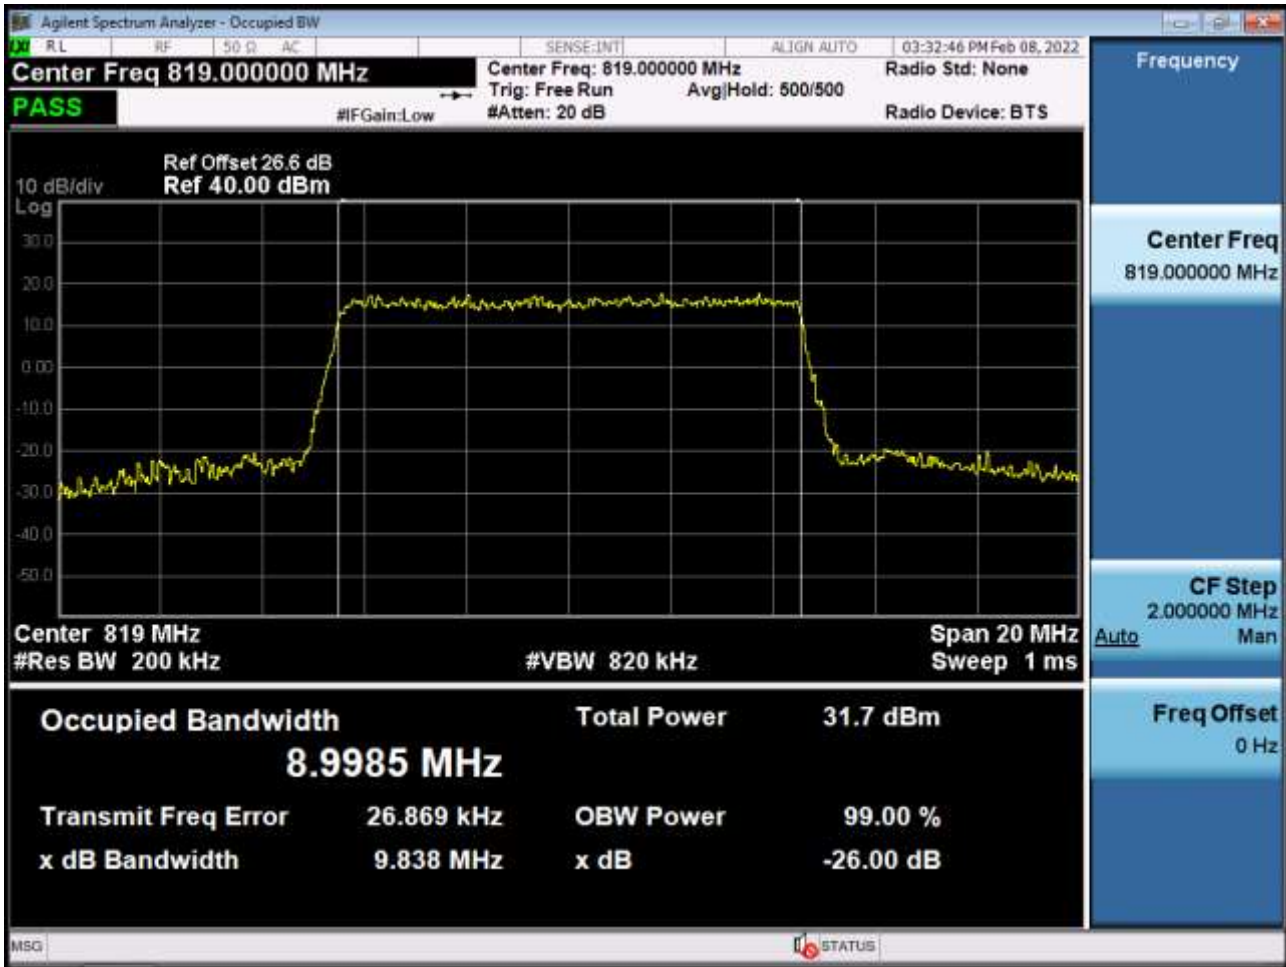

BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 16QAM RB 50\_0)

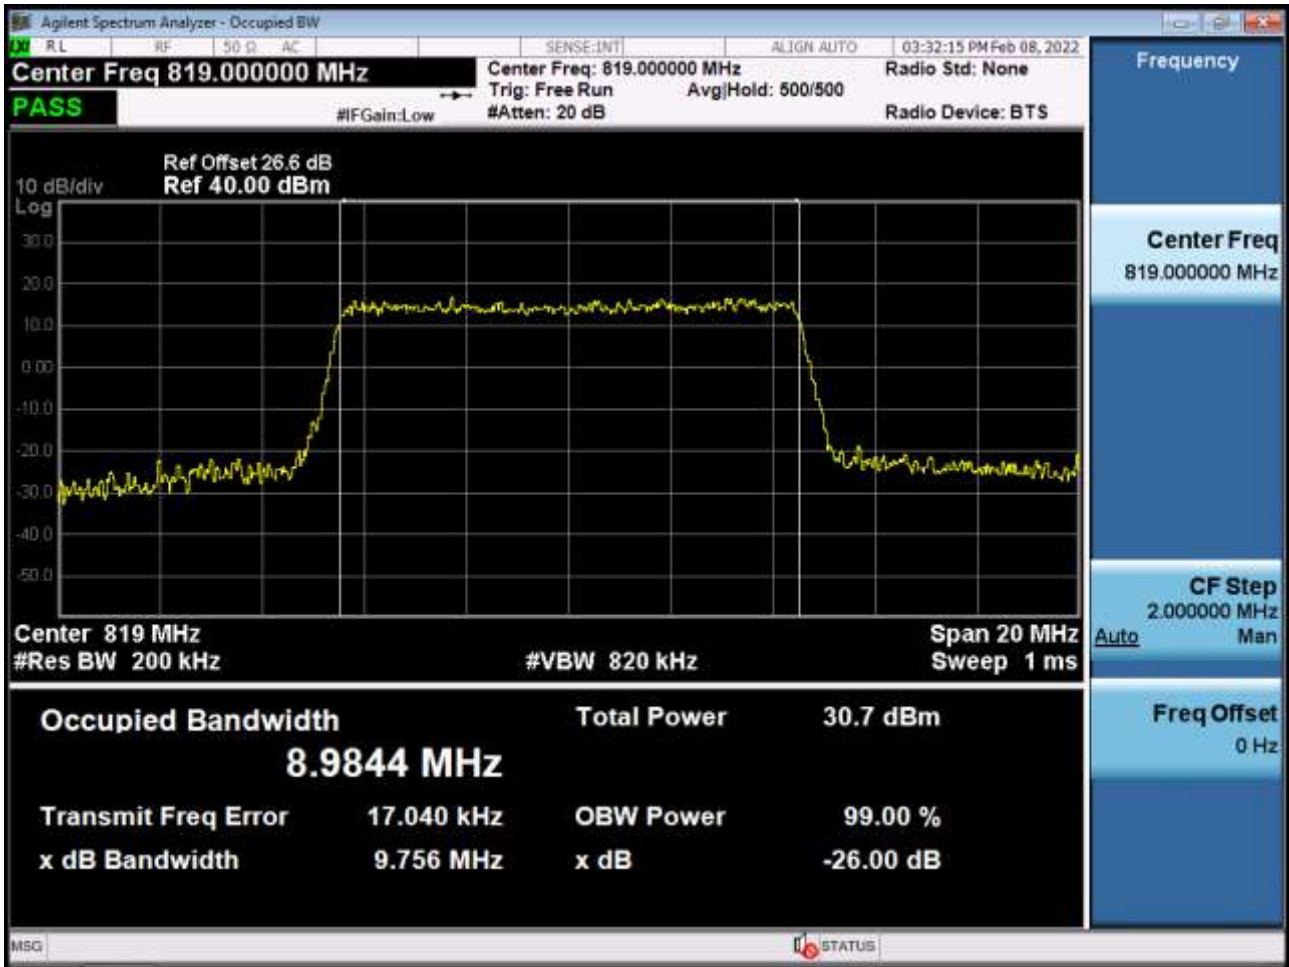


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 64QAM RB 50\_0)

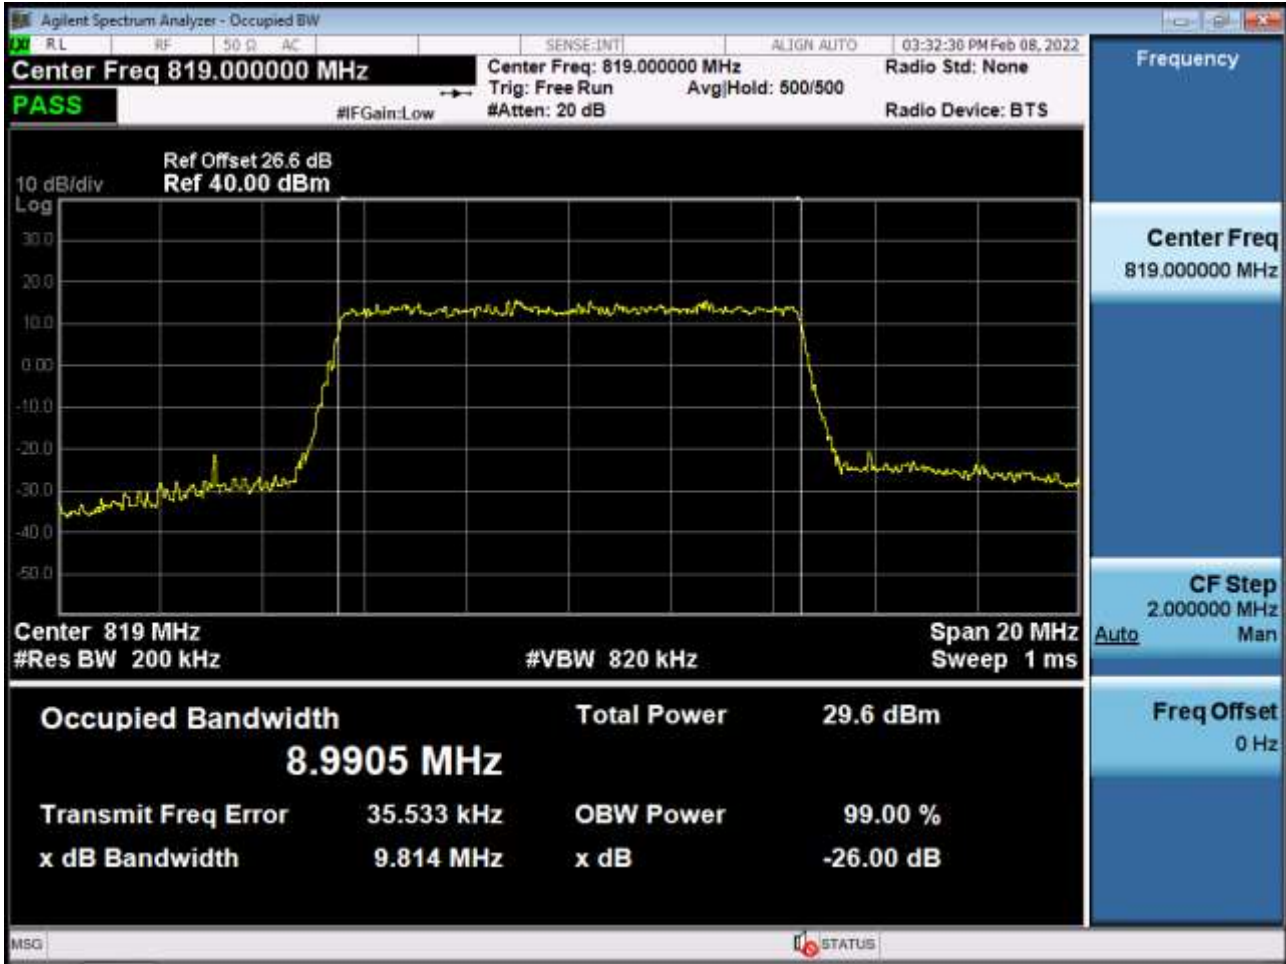





BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 QPSK RB 75\_0)

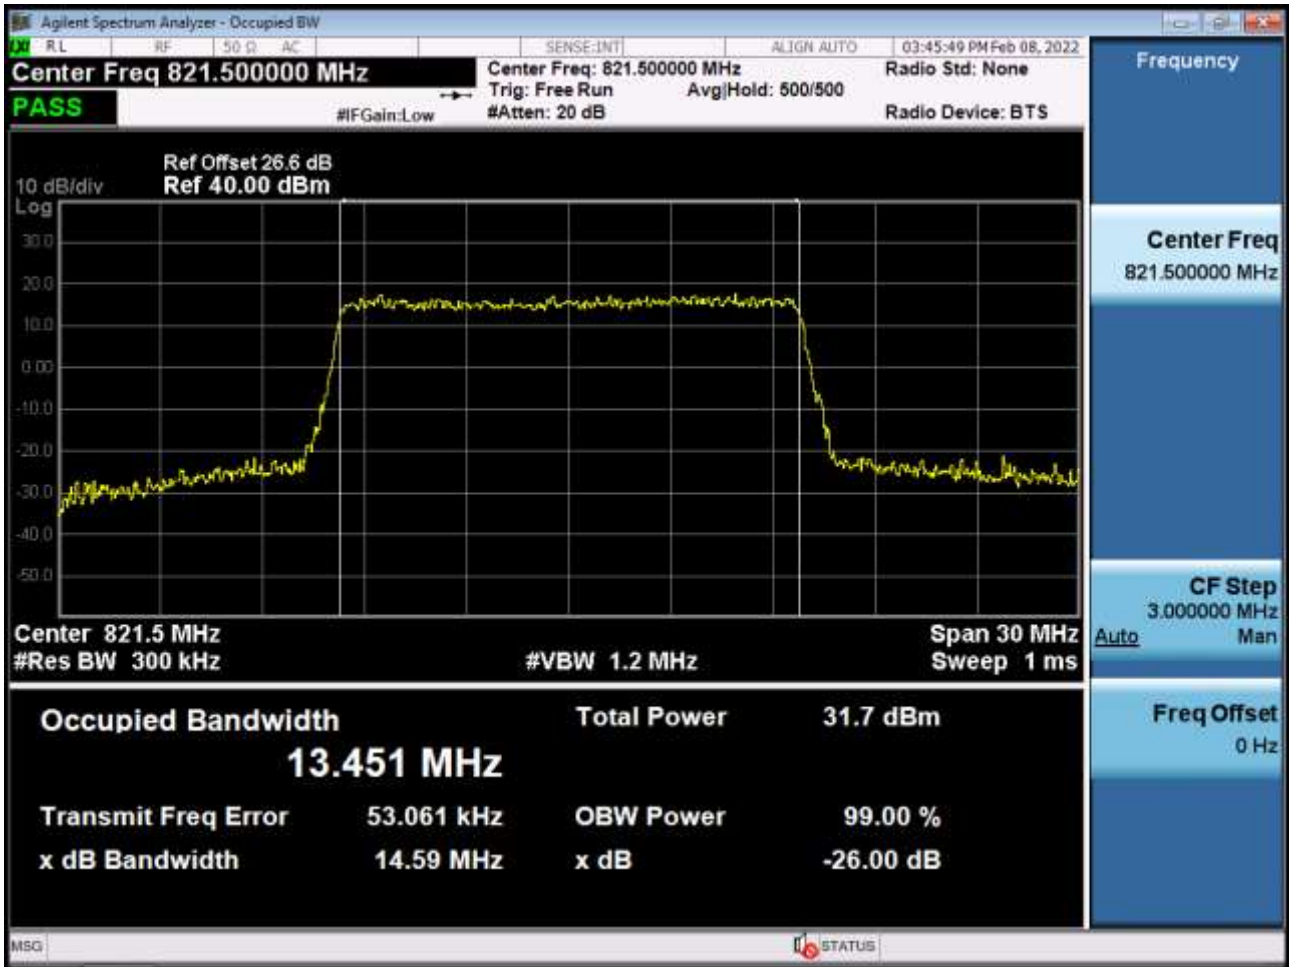


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 16QAM RB 75\_0)

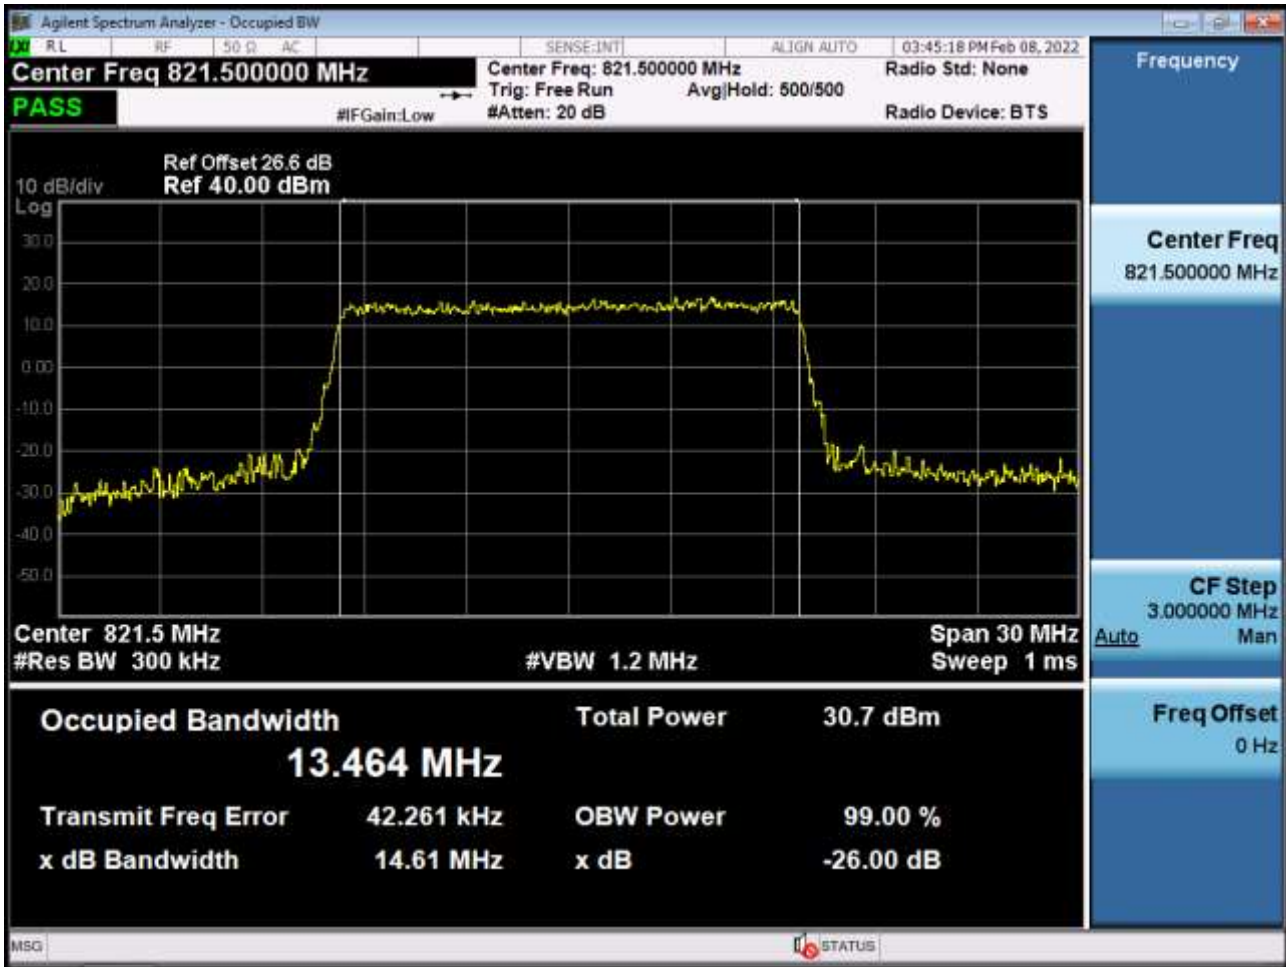

BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 64QAM RB 75\_0)

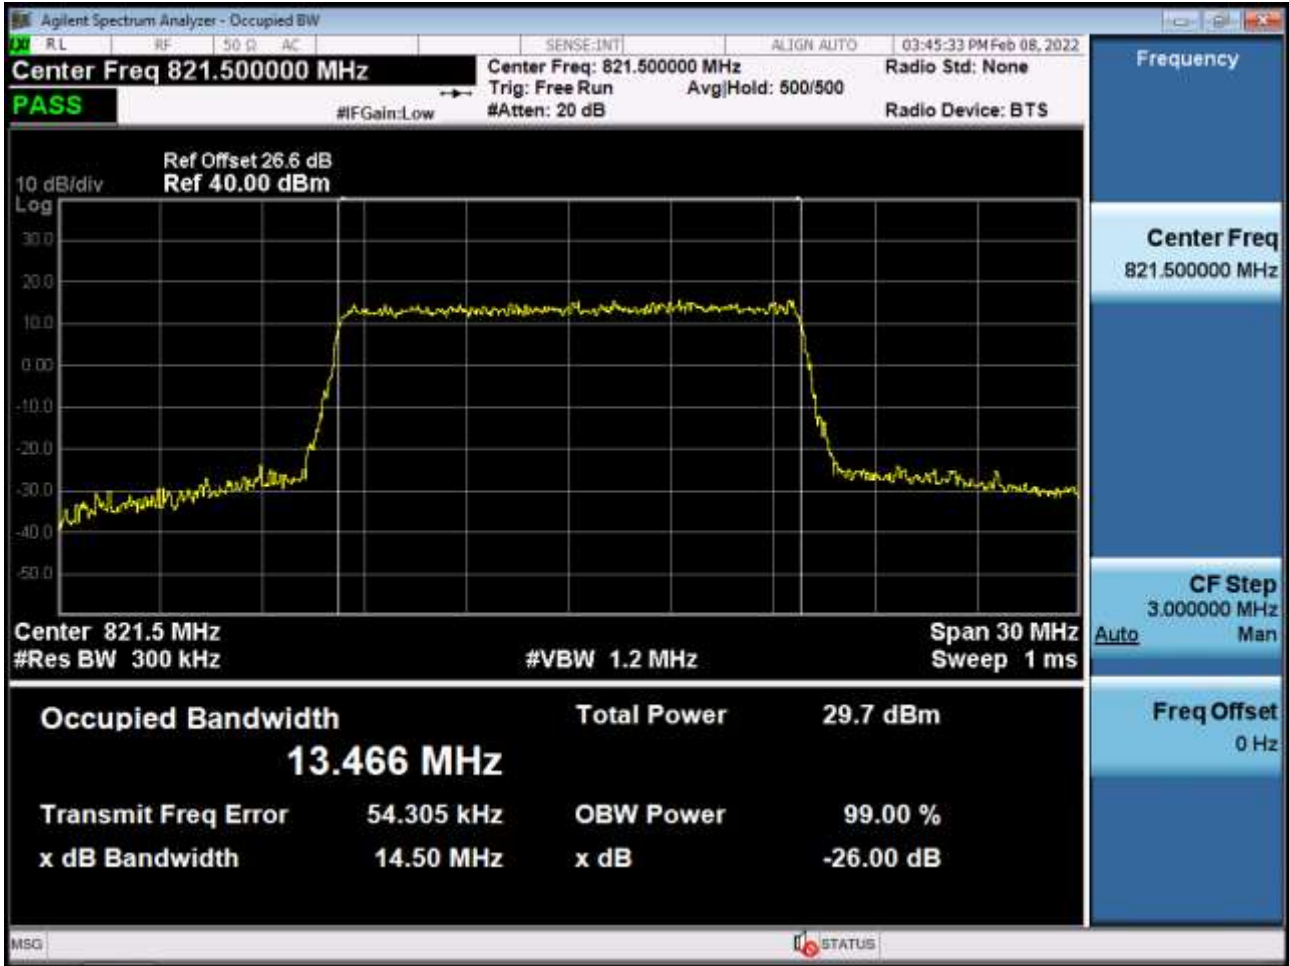


BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK RB 1, Offset 0)

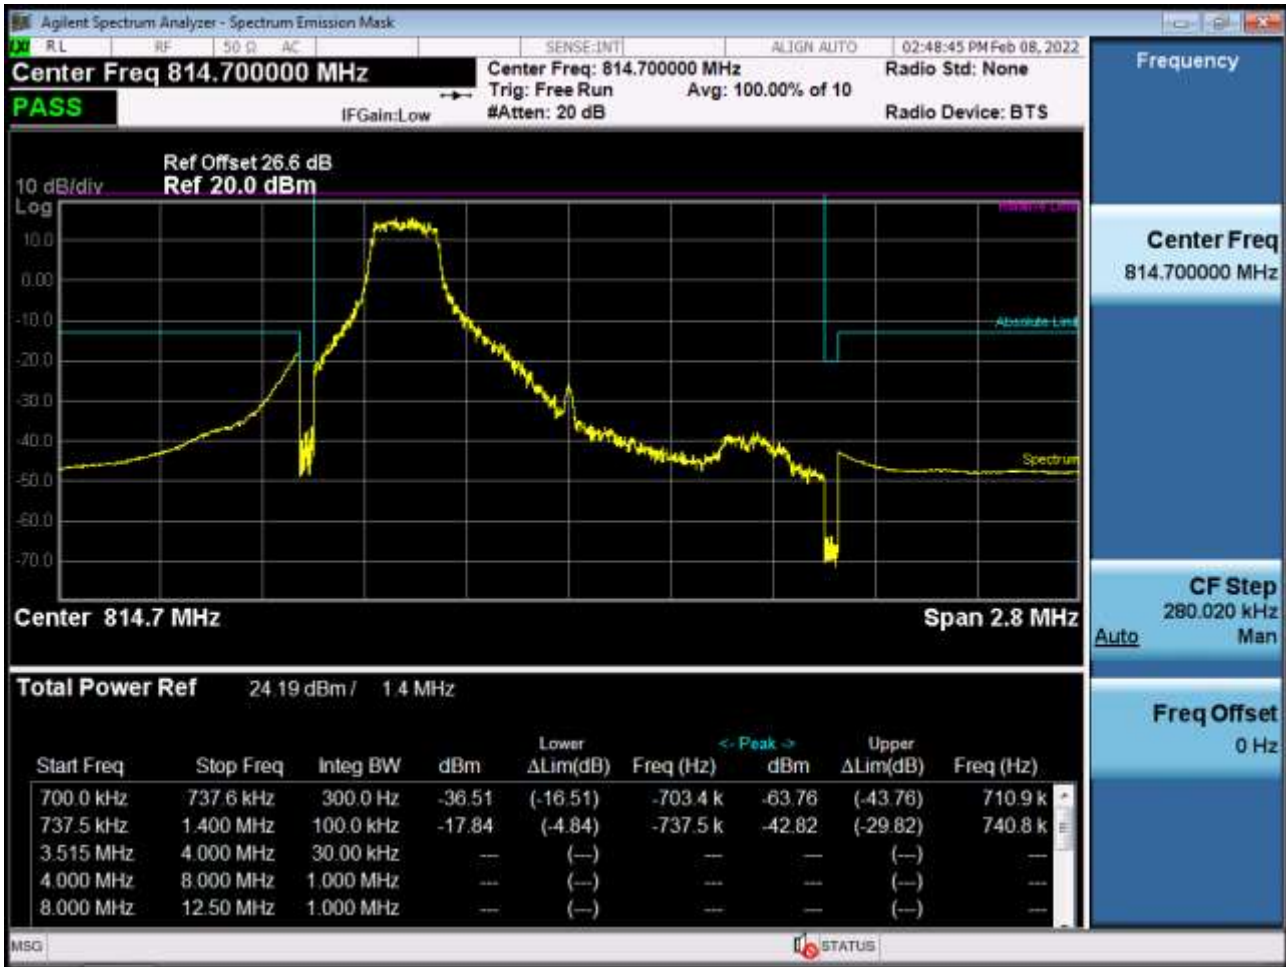


BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK\_RB6\_Offset 0)




BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK RB 1, Offset 0)

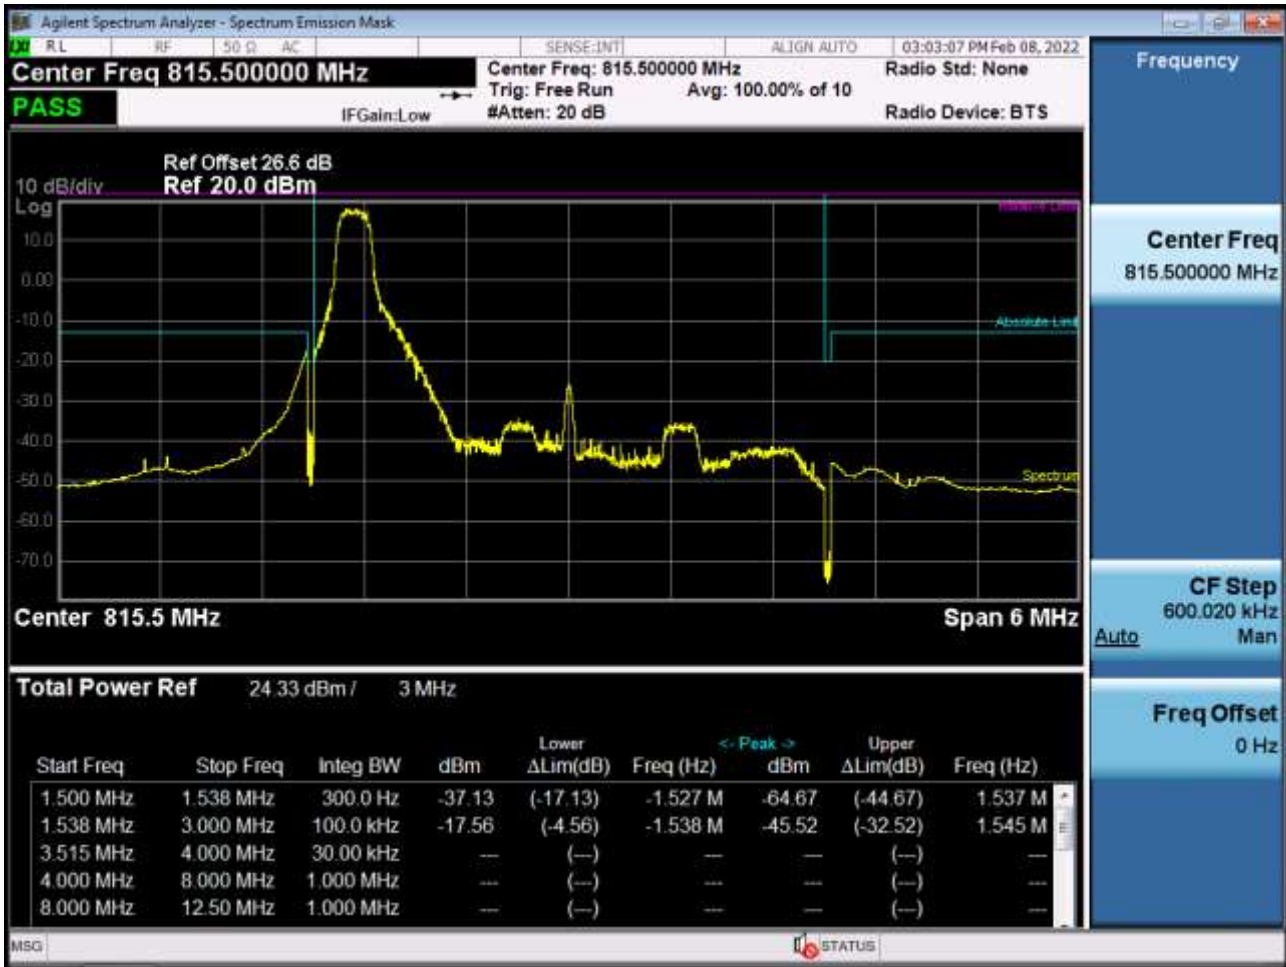

BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK\_RB15\_Offset 0)

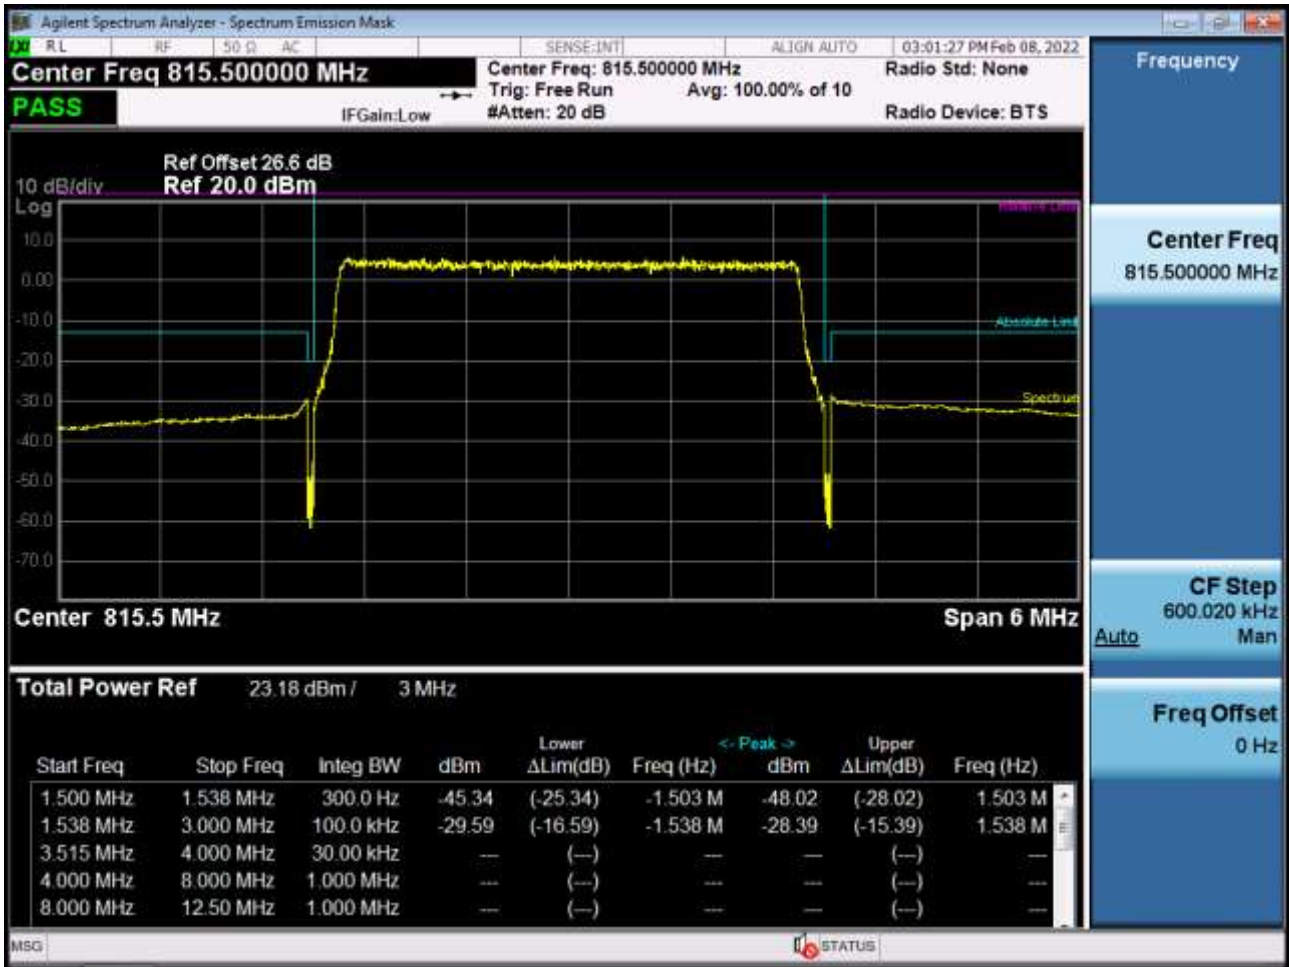


BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK RB 1, Offset 0)

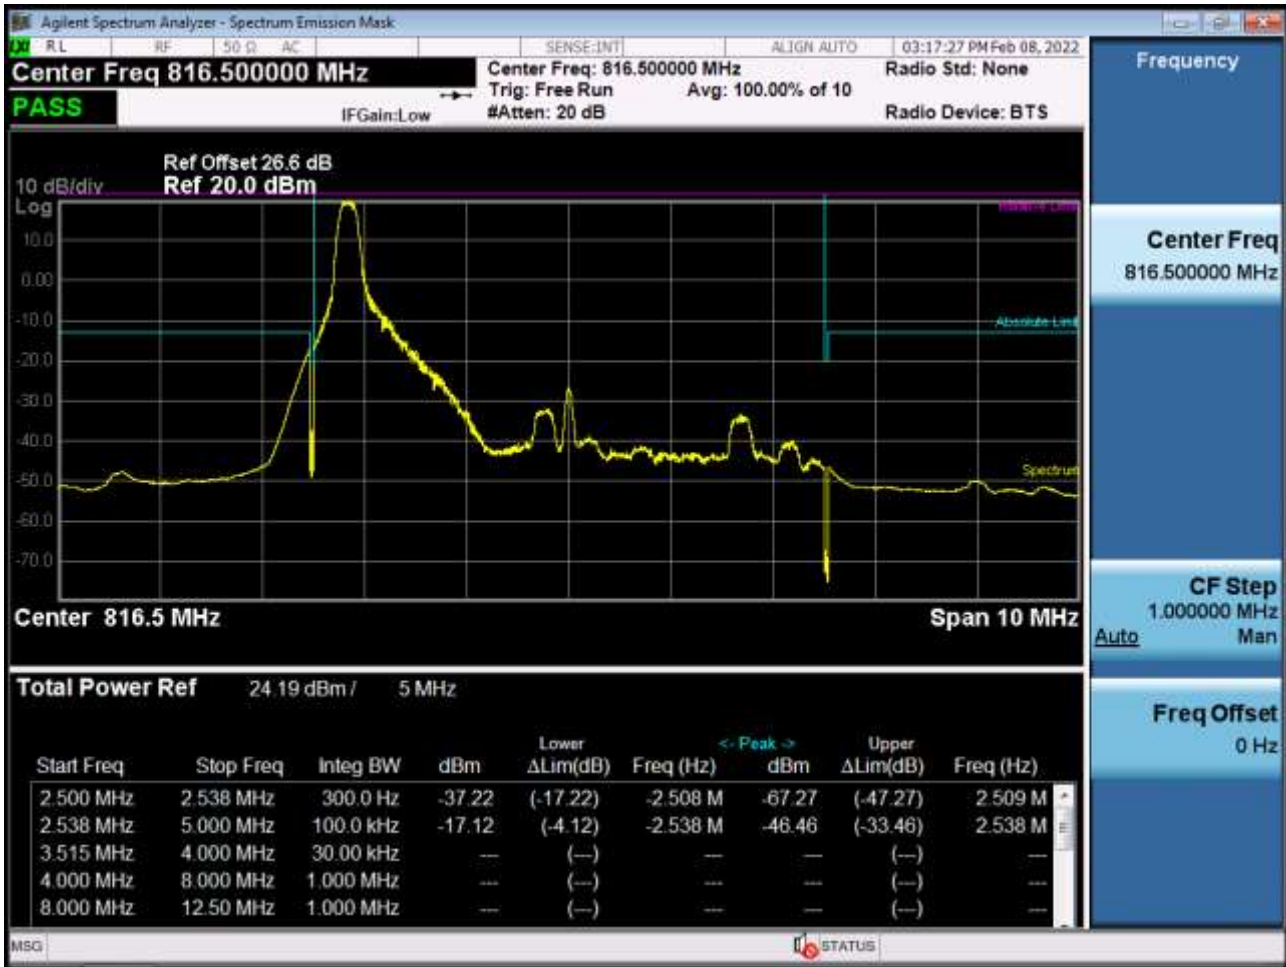





BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK\_RB25\_Offset 0)

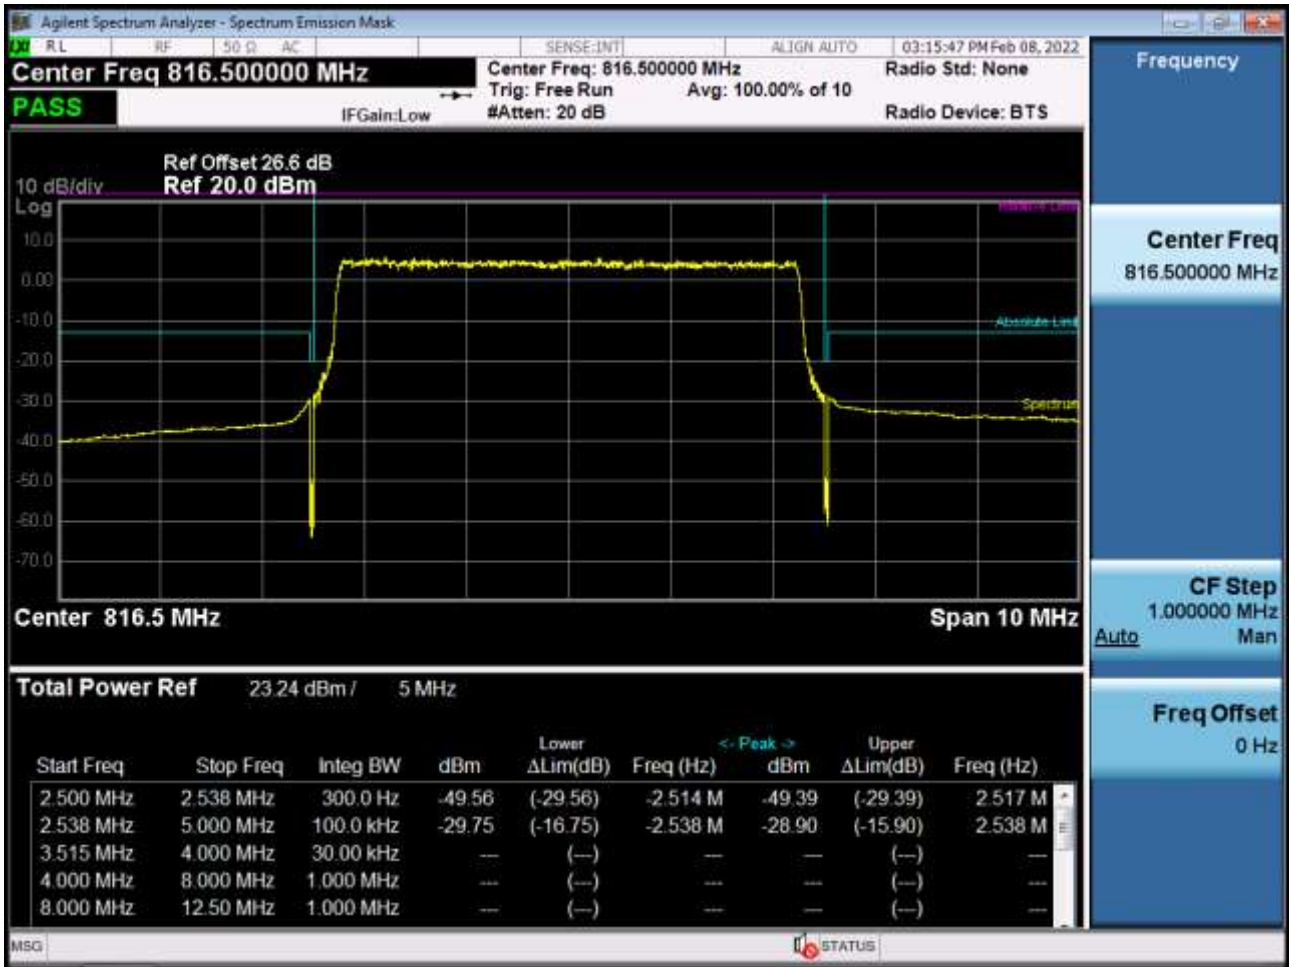


BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK RB 1, Offset 0)

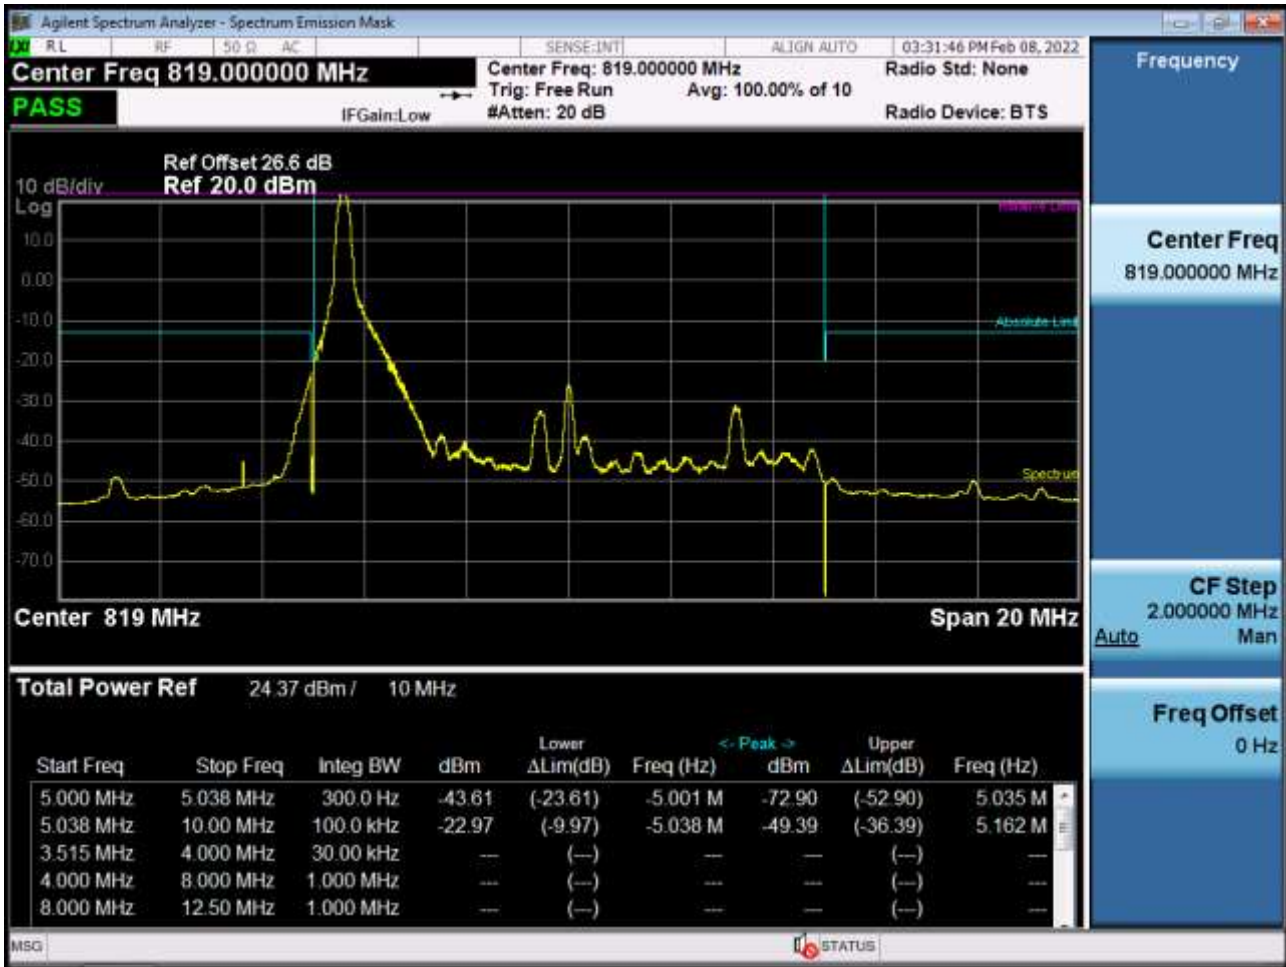


BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK\_RB50\_Offset 0)

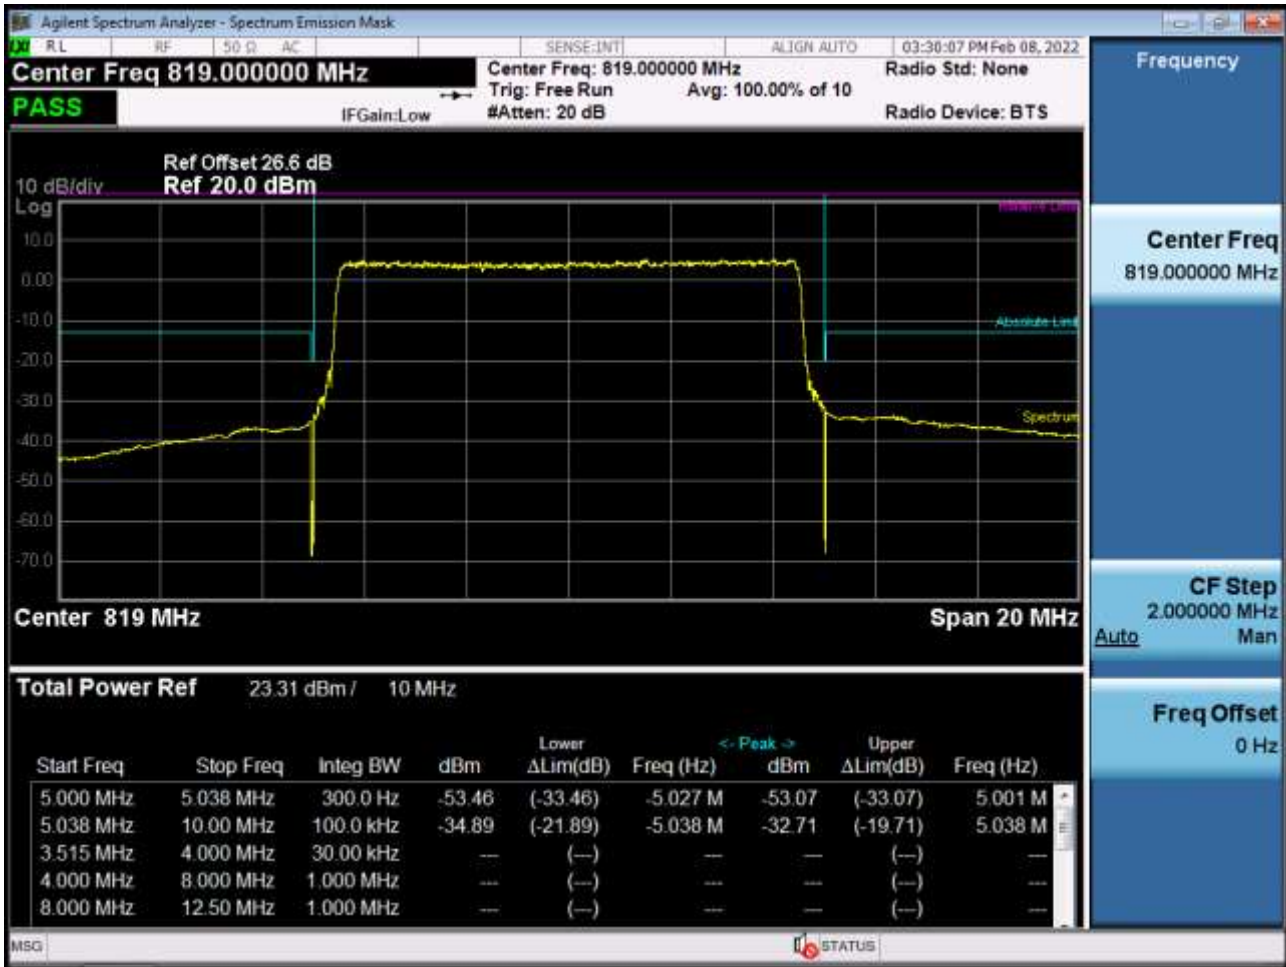

BAND 26. Mid Channel Edge Plot (10 M BW Ch. 26740 QPSK\_RB1\_Offset 49)

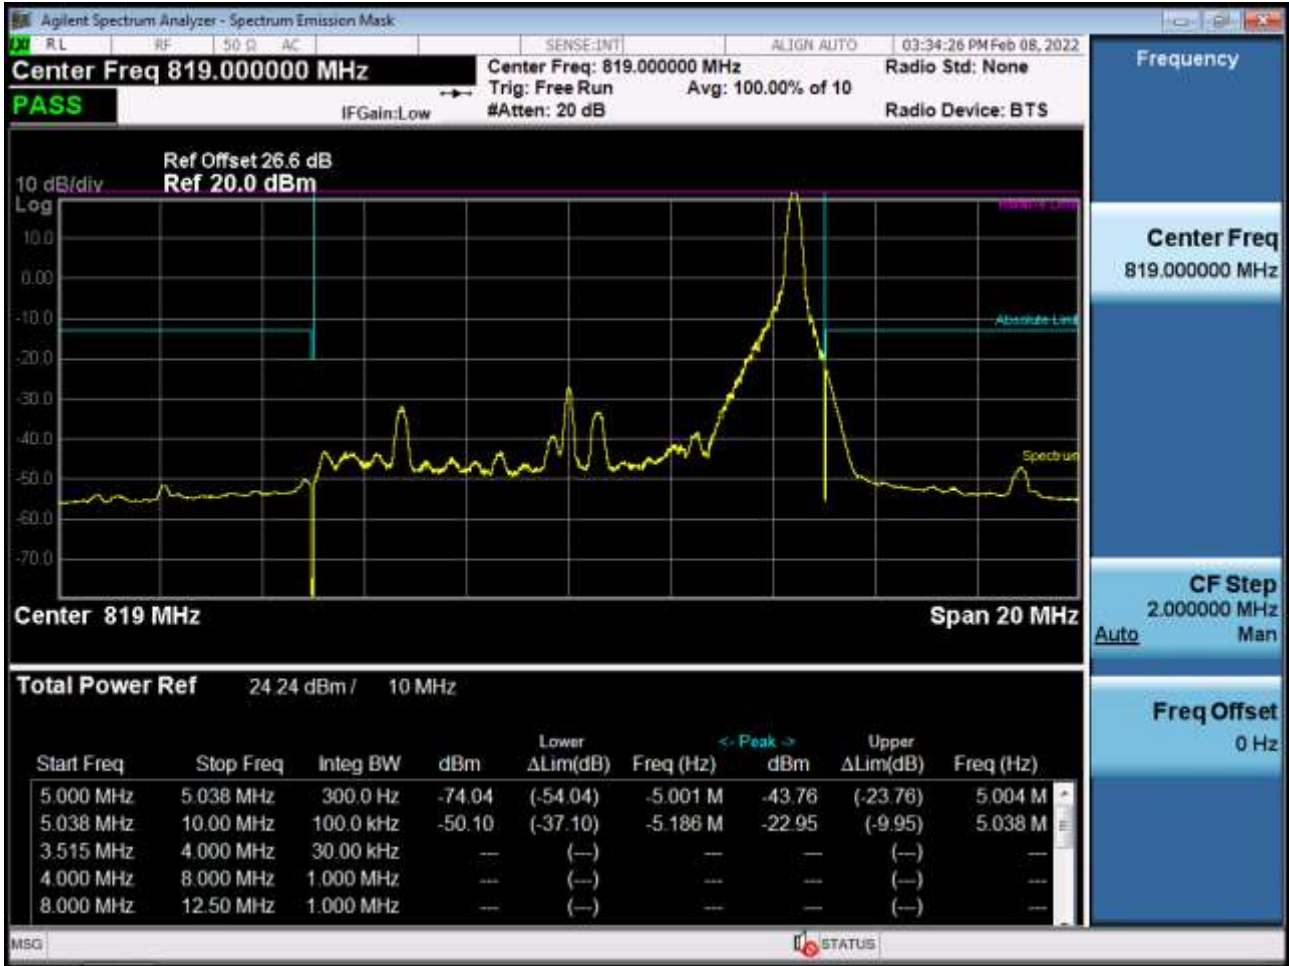


BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset 0)

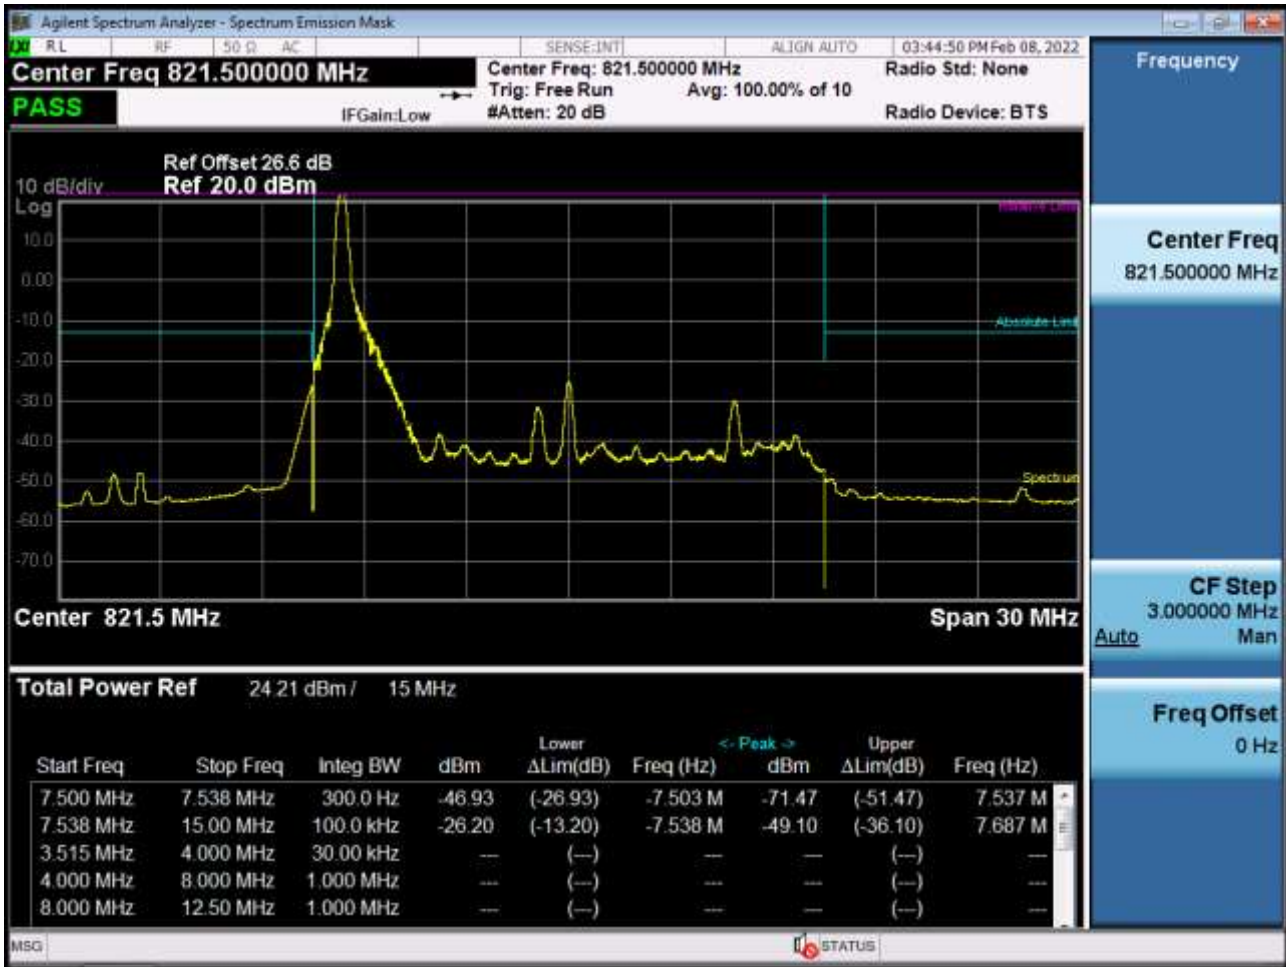


BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 75, Offset0)



BAND 26. Mid Channel Edge Plot (15 M BW Ch.26765 QPSK\_RB1\_Offset 74)

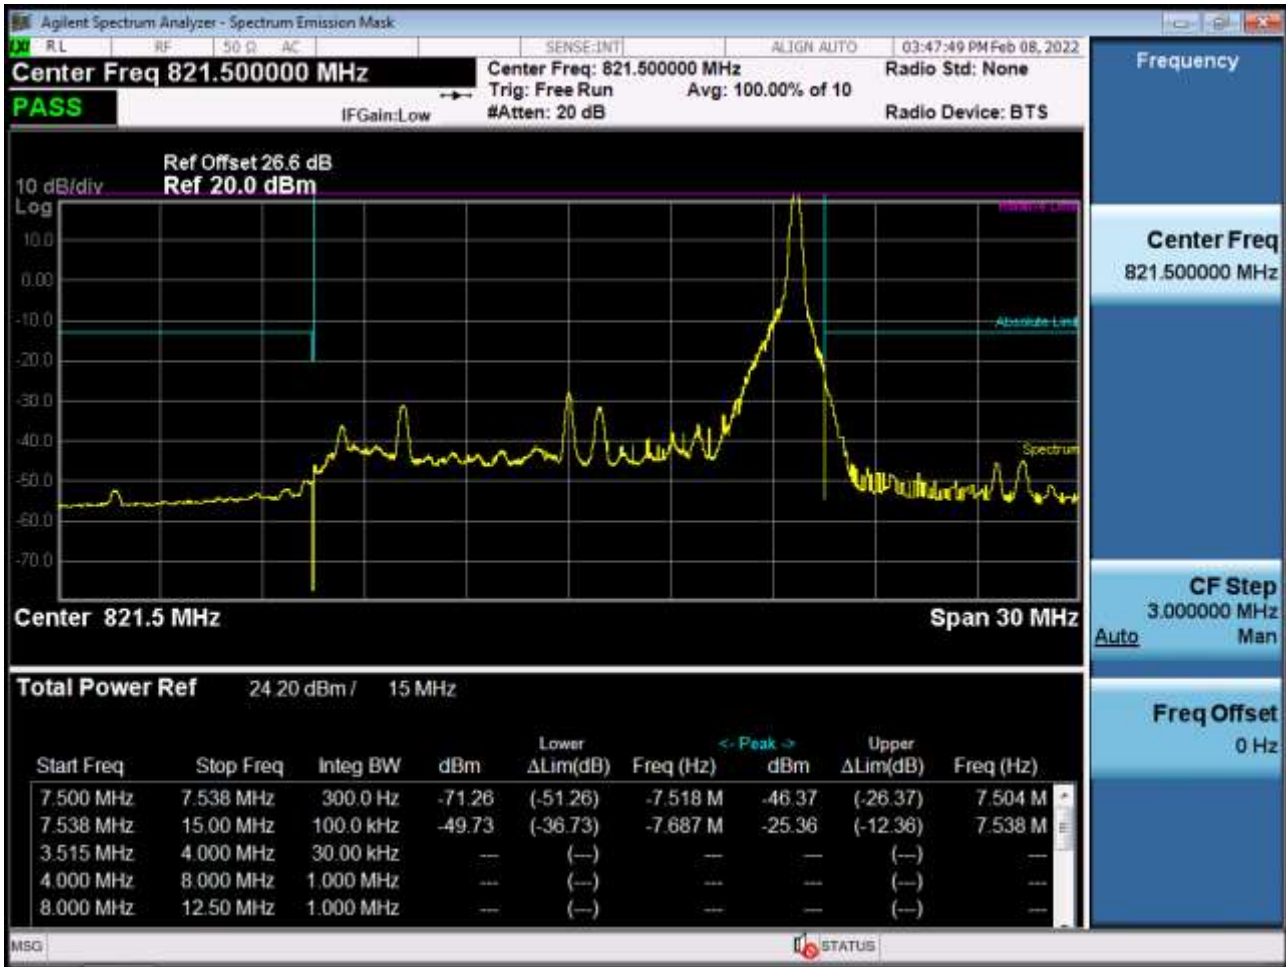

BAND 26. Mid Band Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset74)

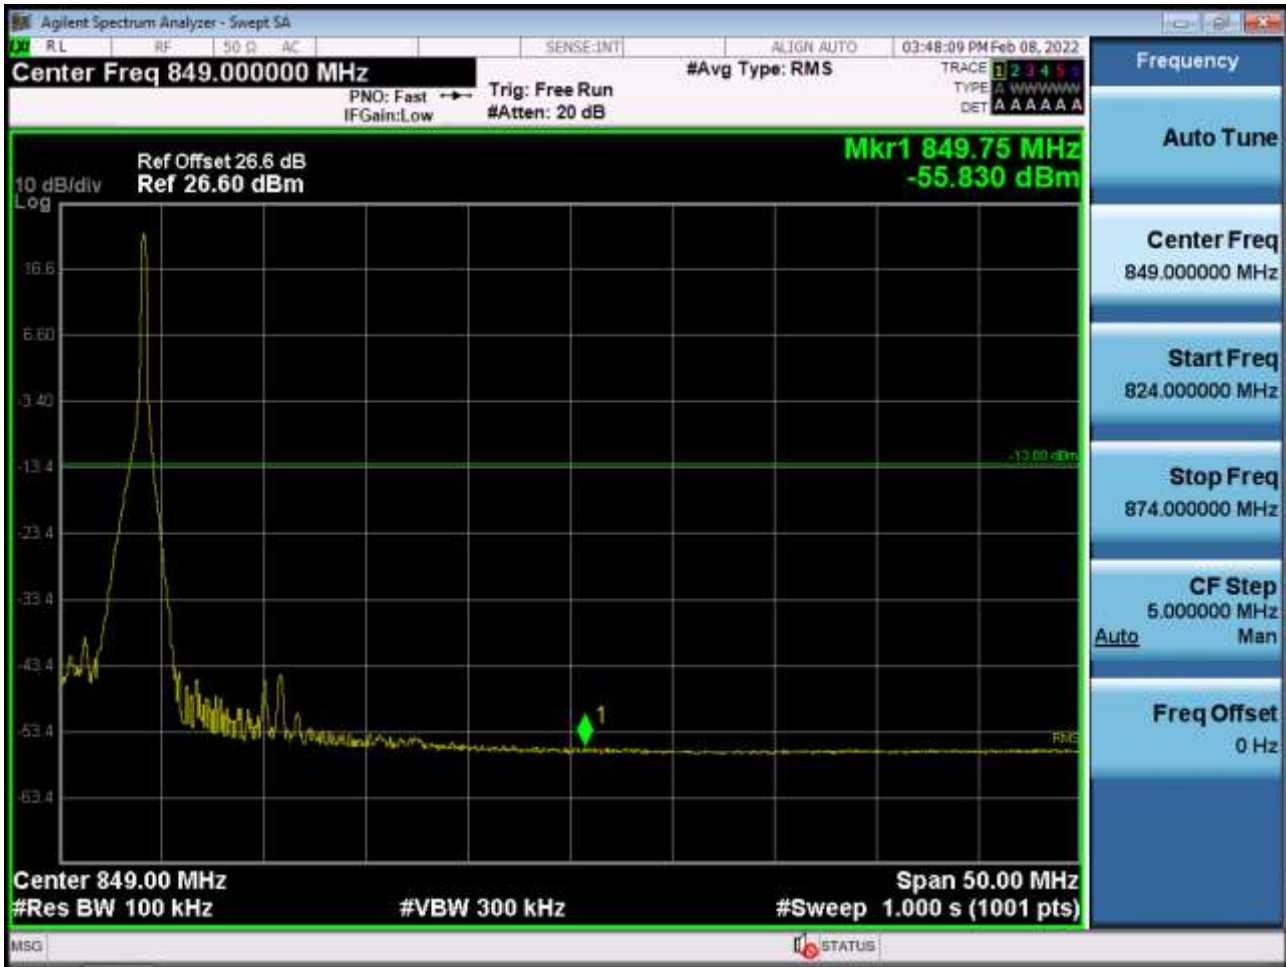




BAND 26. Mid Band Edge Plot (15 M BW Ch.26765 QPSK\_RB75\_Offset 0)




BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK\_RB1\_Offset 5)

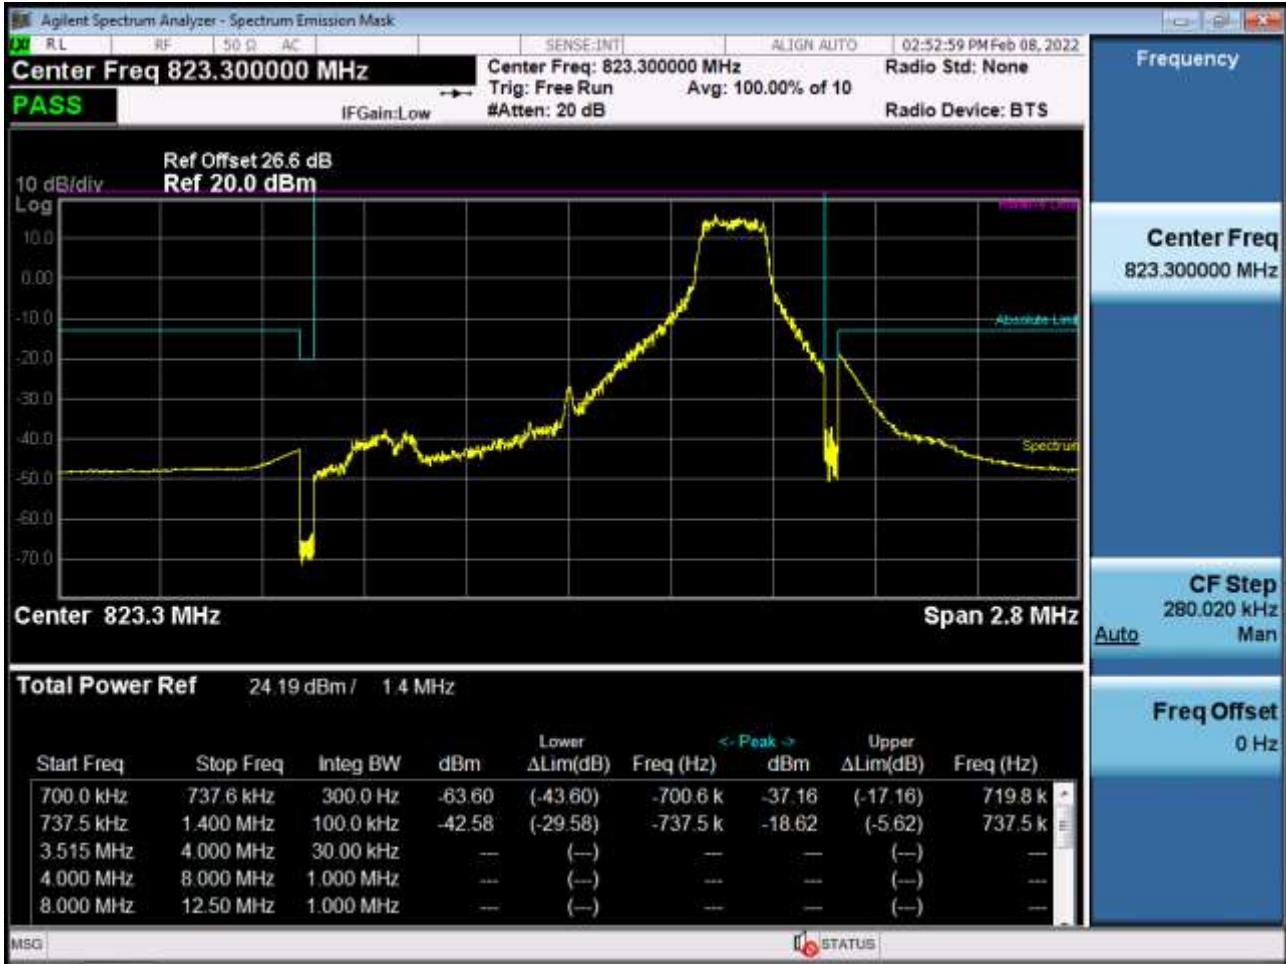


BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK\_RB6\_Offset 0)




BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK\_RB1\_Offset 14)

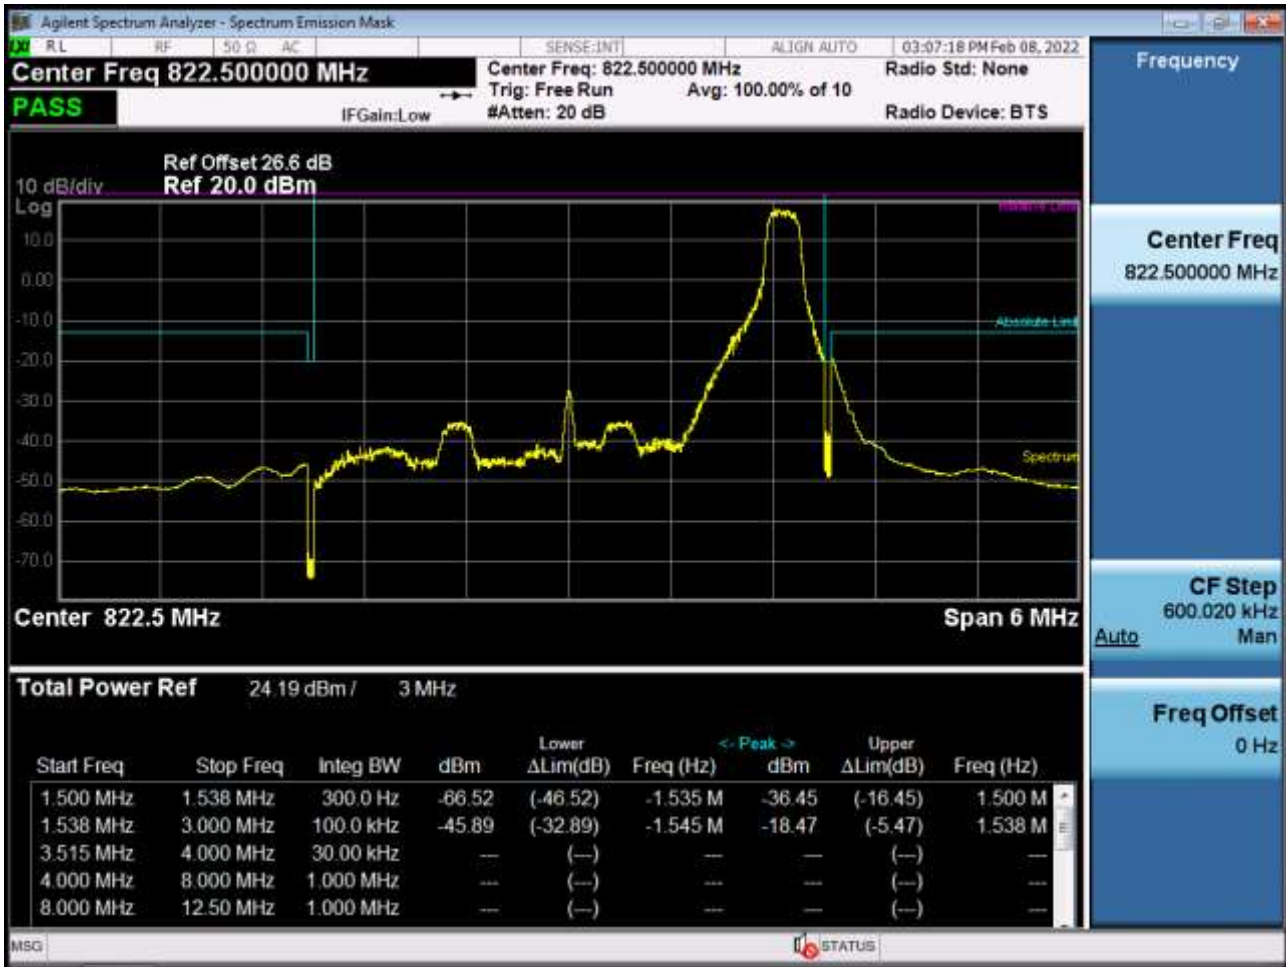


BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK\_RB15\_Offset 0)

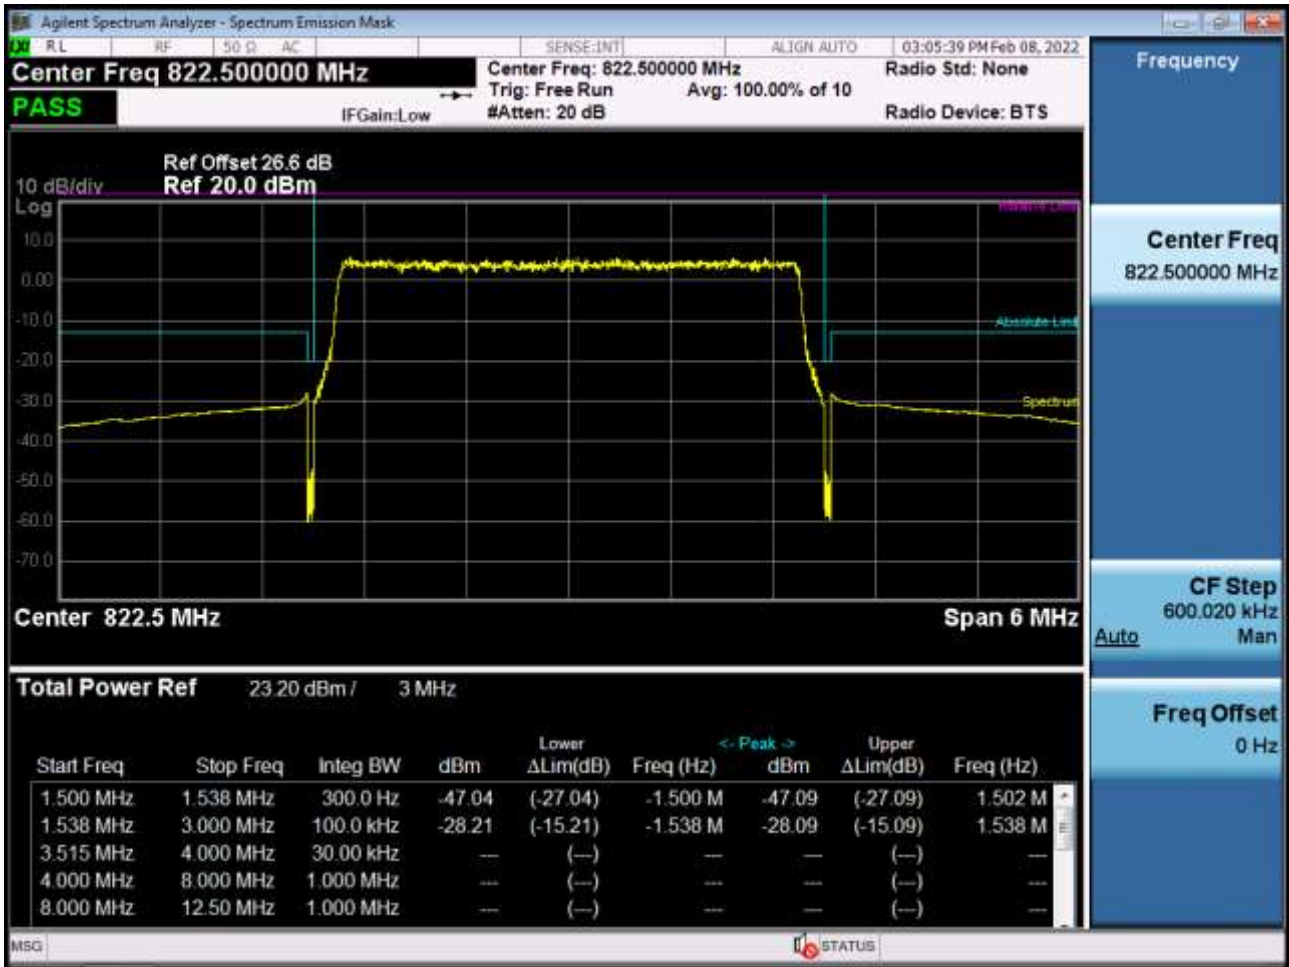


BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK\_RB1\_Offset 24)

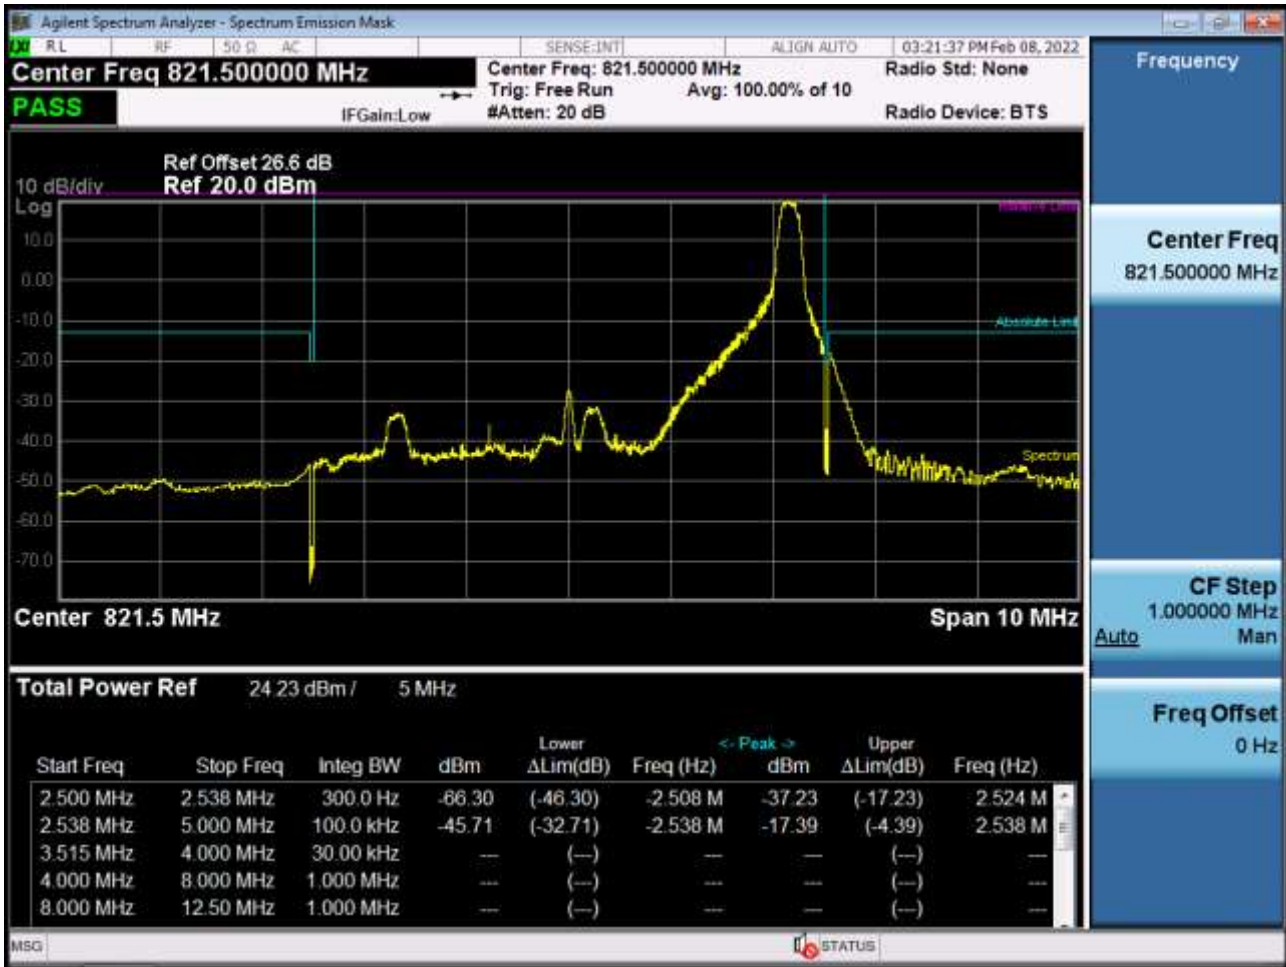

BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK\_RB25\_Offset 0)

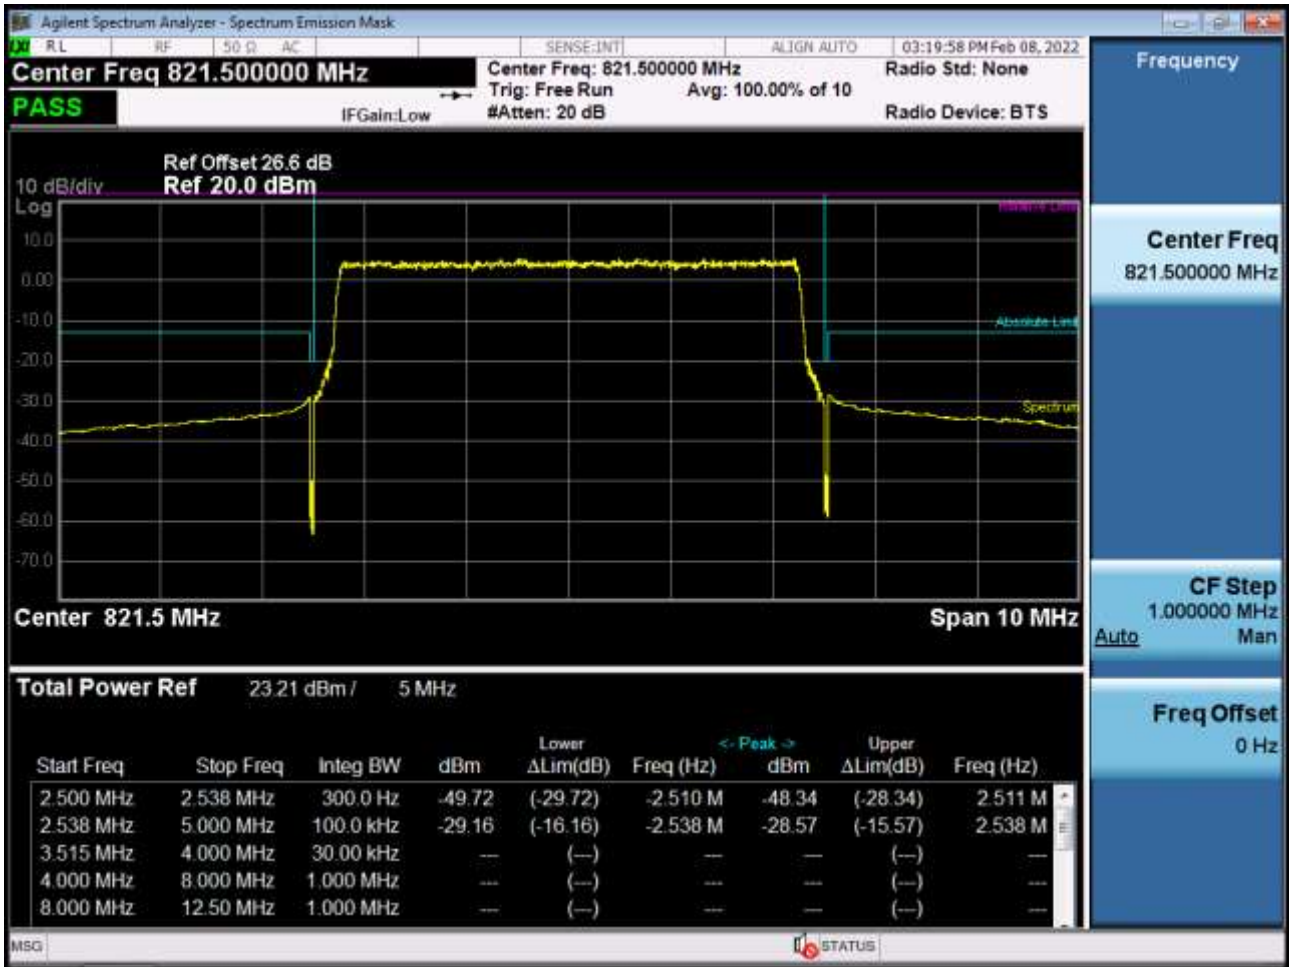


BAND 26. Conducted Spurious (26697 ch\_1.4 MHz\_QPSK\_RB 1\_0)

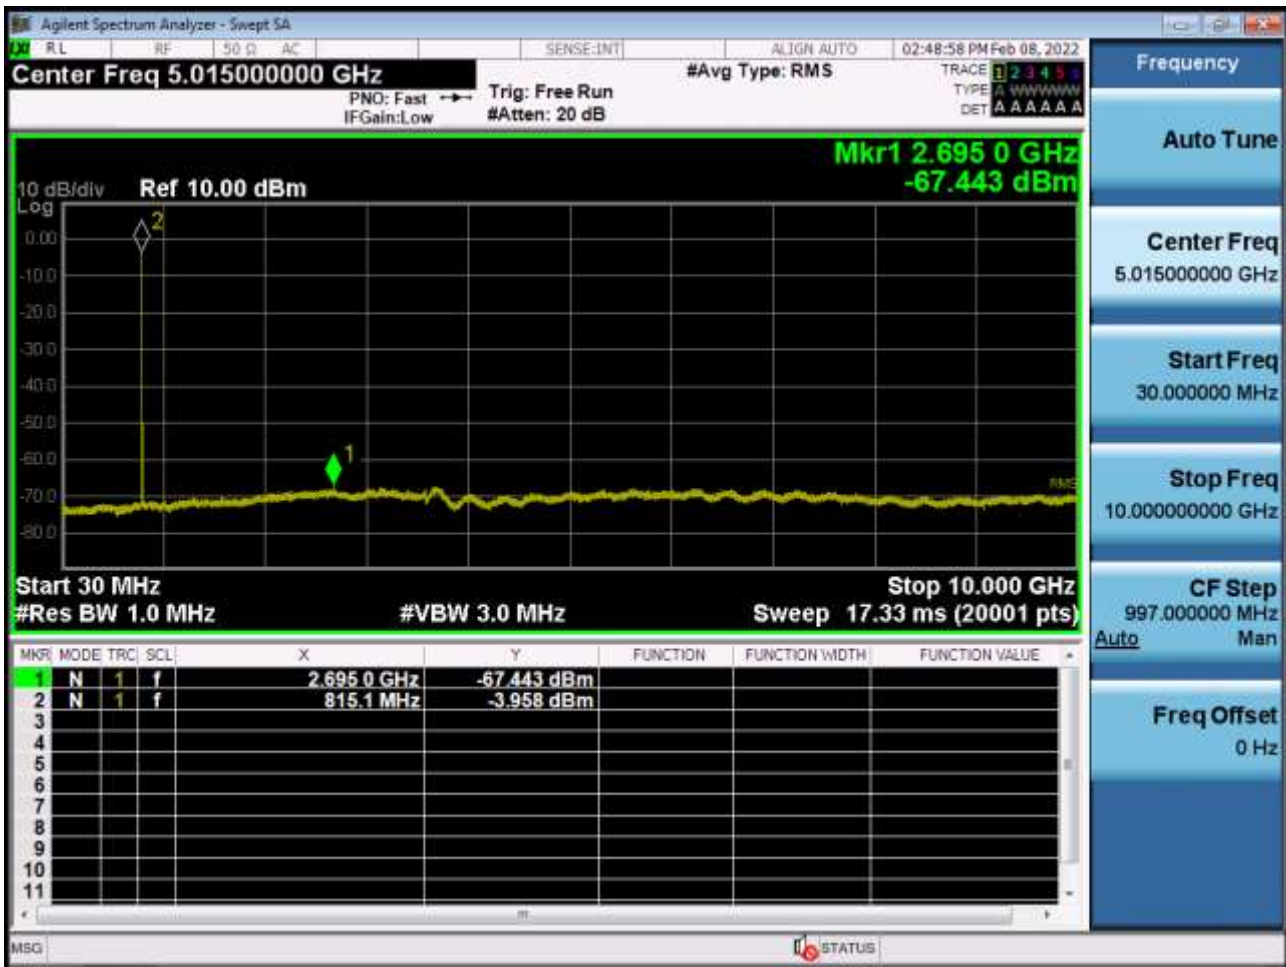





BAND 26. Conducted Spurious (26783 ch\_1.4 MHz\_QPSK\_RB 1\_0)

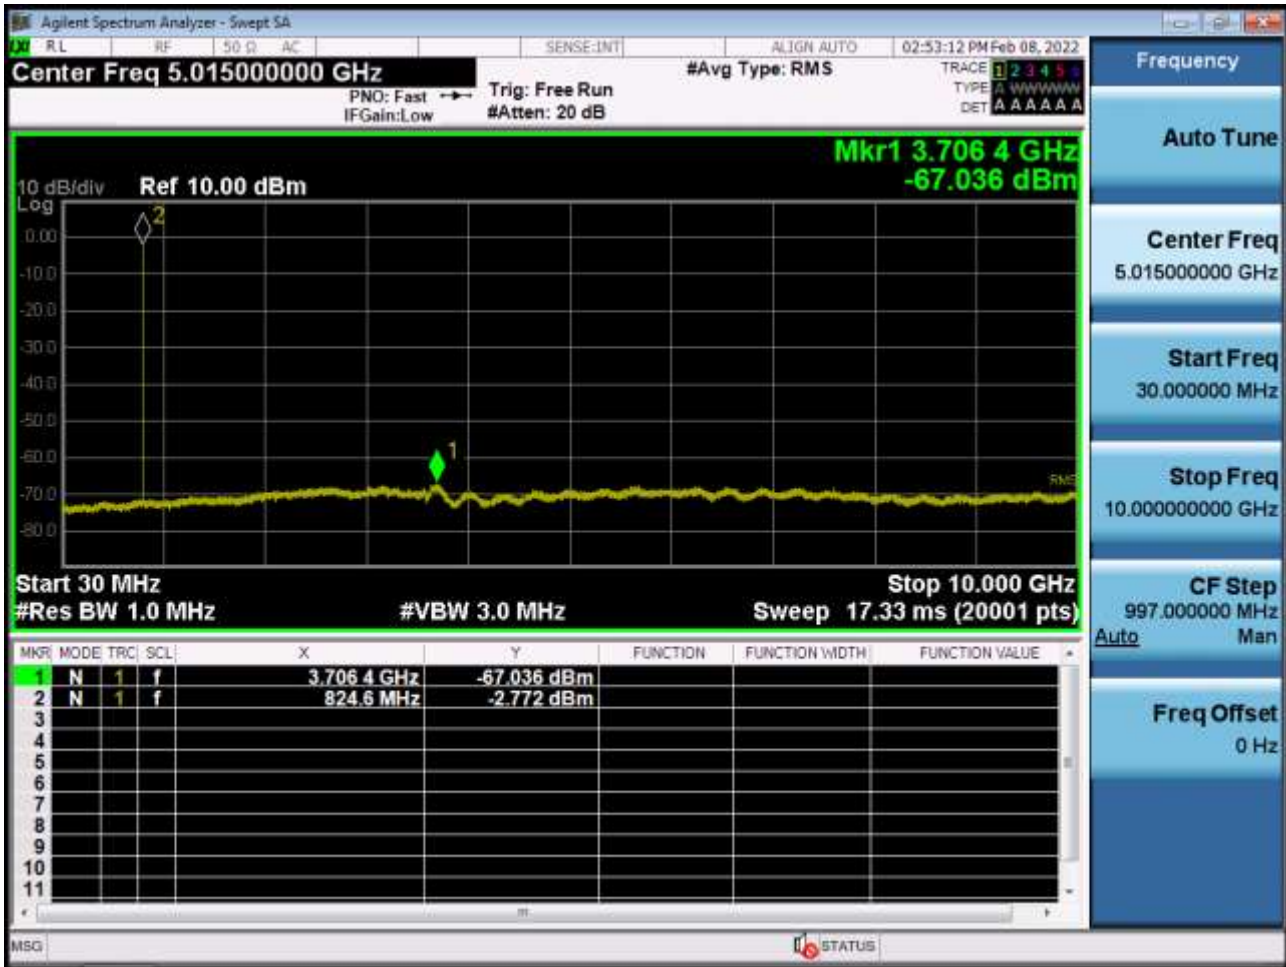


BAND 26. Conducted Spurious (26705 ch\_3 MHz\_QPSK\_RB 1\_0)

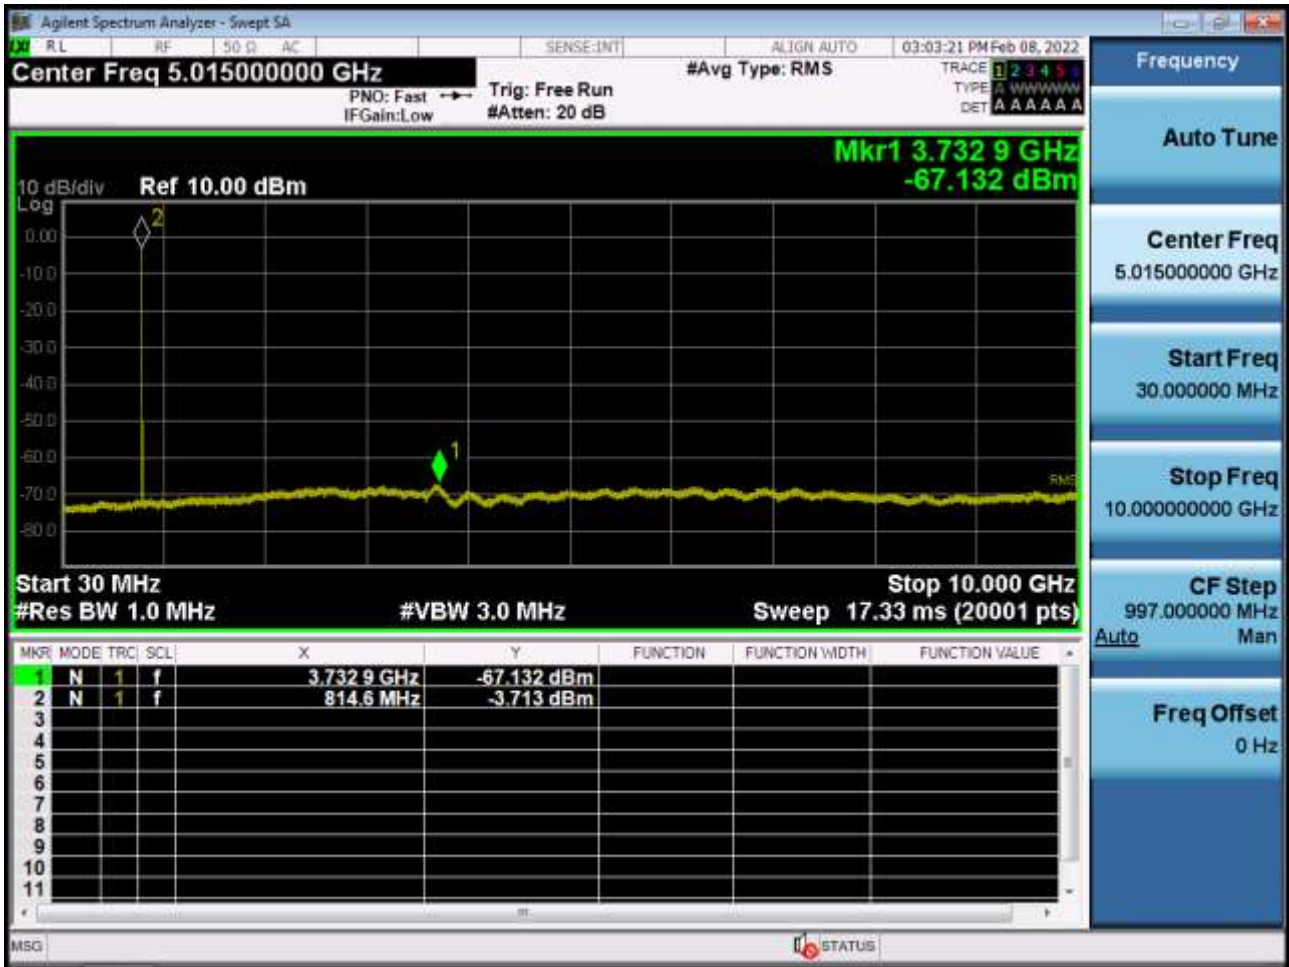


BAND 26. Conducted Spurious (26775 ch\_3 MHz\_QPSK\_RB 1\_0)

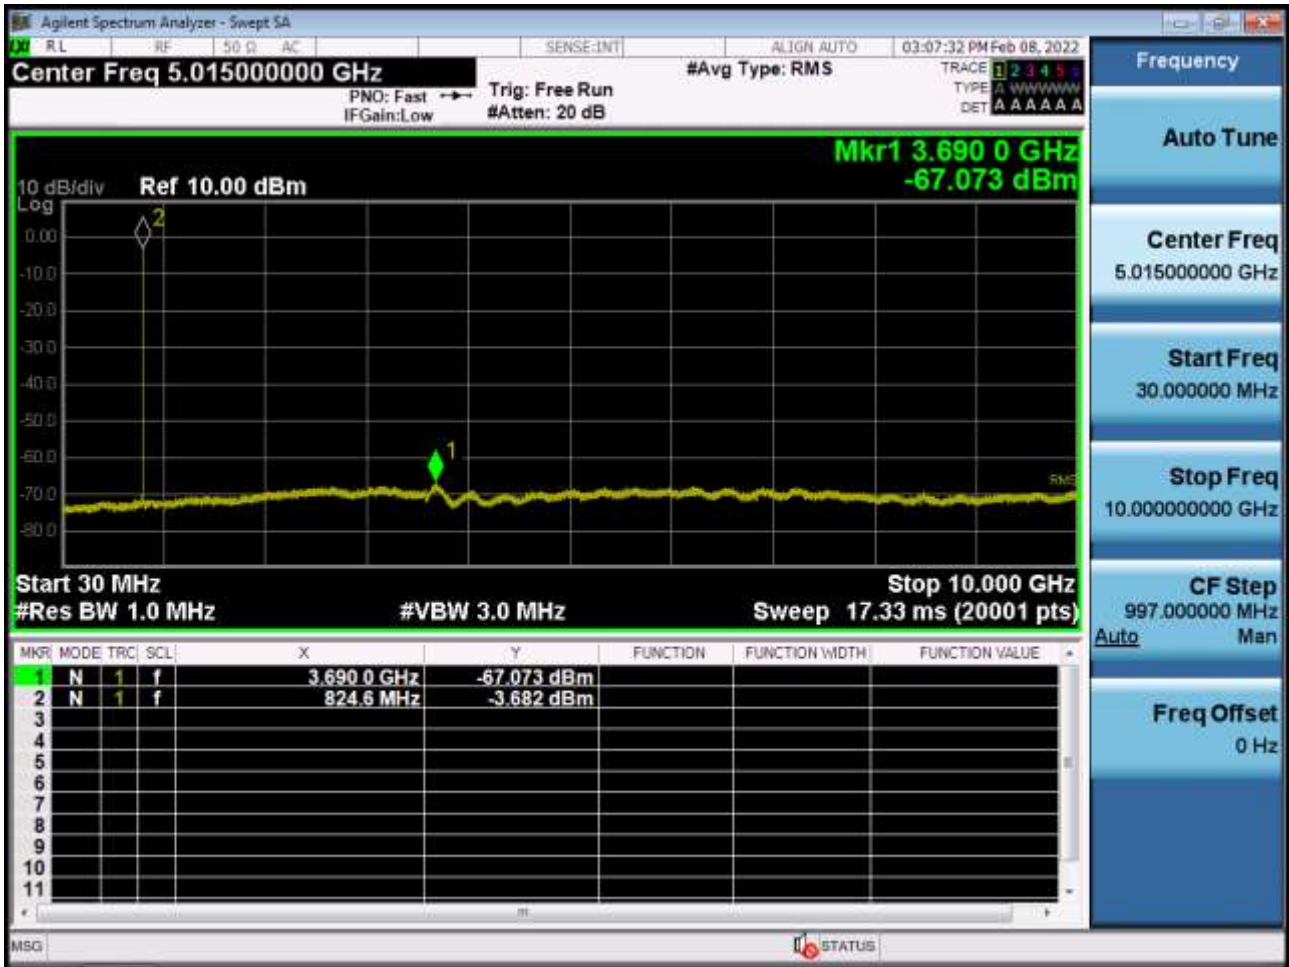


BAND 26. Conducted Spurious (26715 ch\_5 MHz\_QPSK\_RB 1\_0)

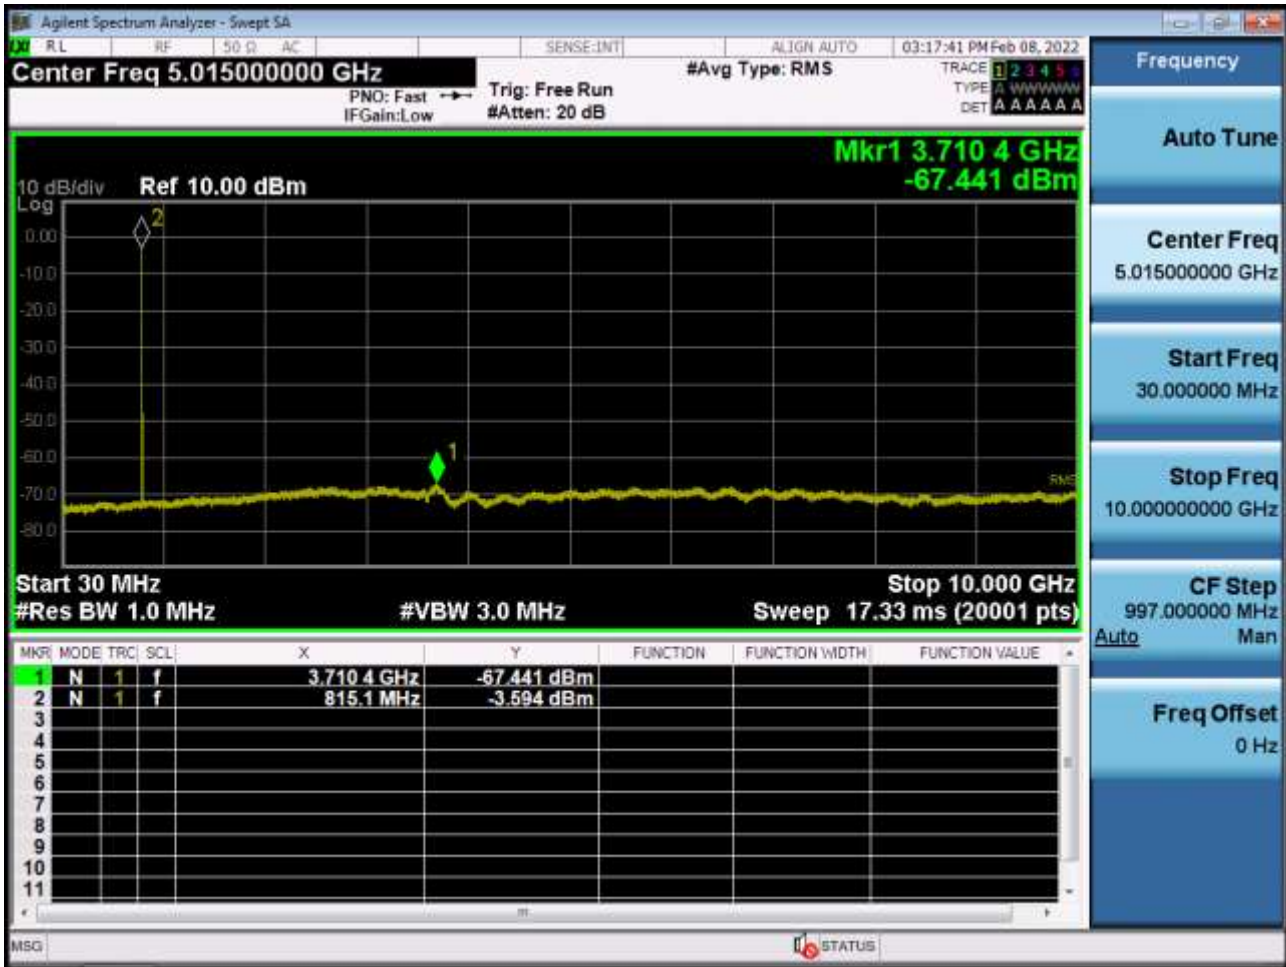


BAND 26. Conducted Spurious (26765 ch\_5 MHz\_QPSK\_RB 1\_0)

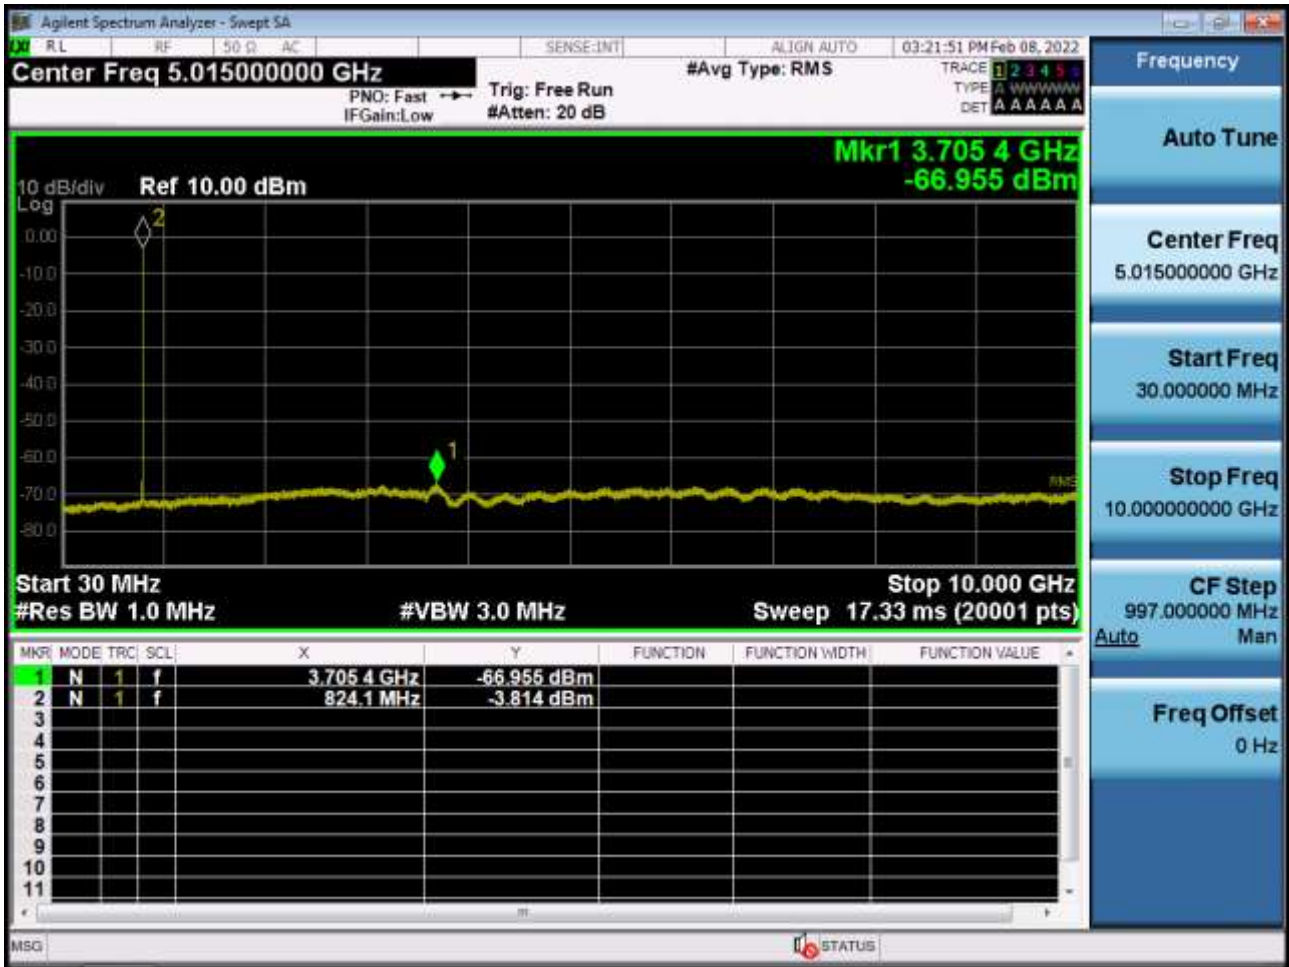

BAND 26. Conducted Spurious (26740 ch\_10 MHz\_QPSK\_RB 1\_0)

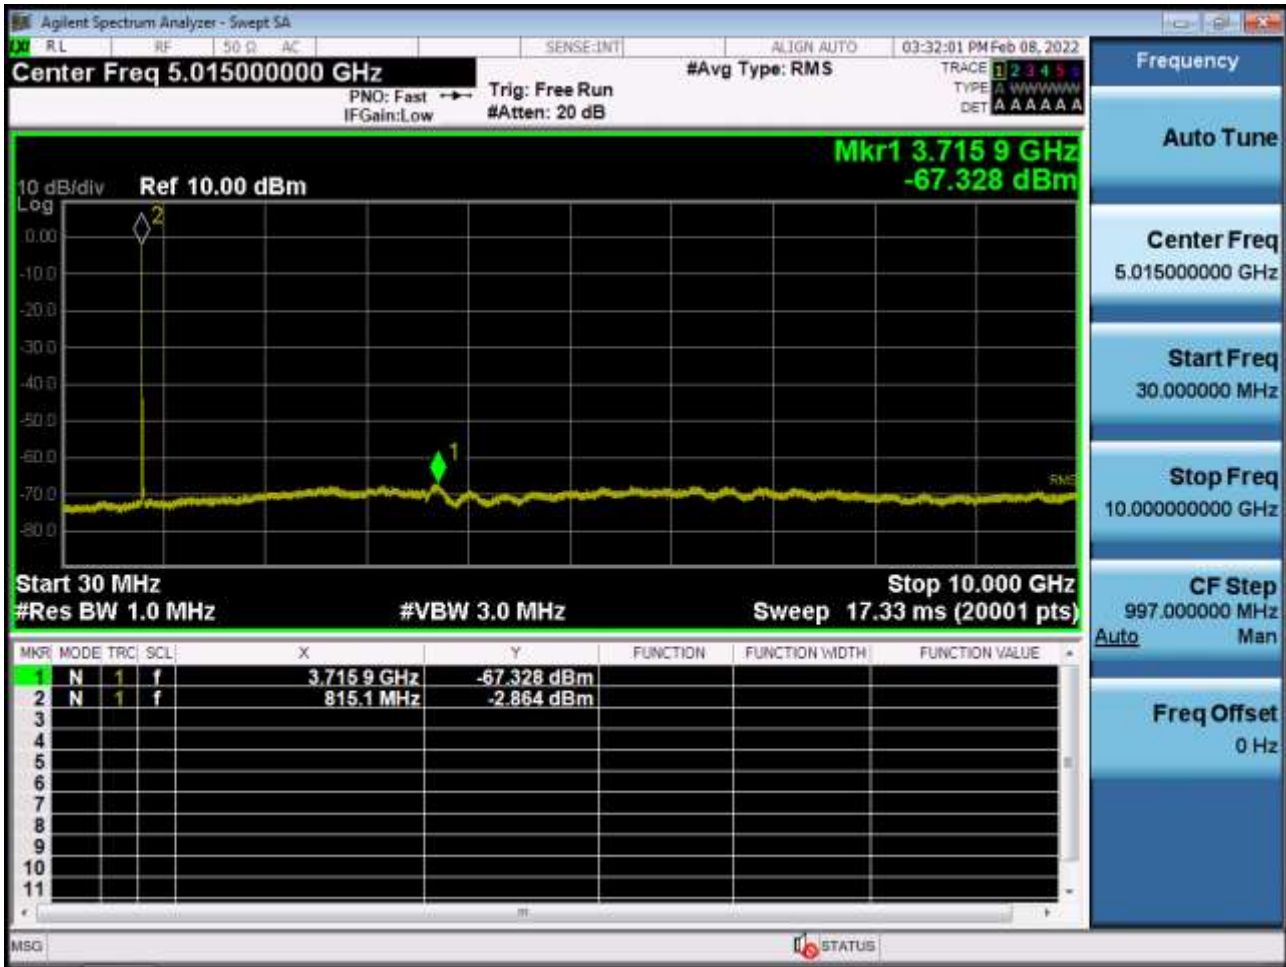


BAND 26. Conducted Spurious (26765 ch\_15 MHz\_QPSK\_RB 1\_0)

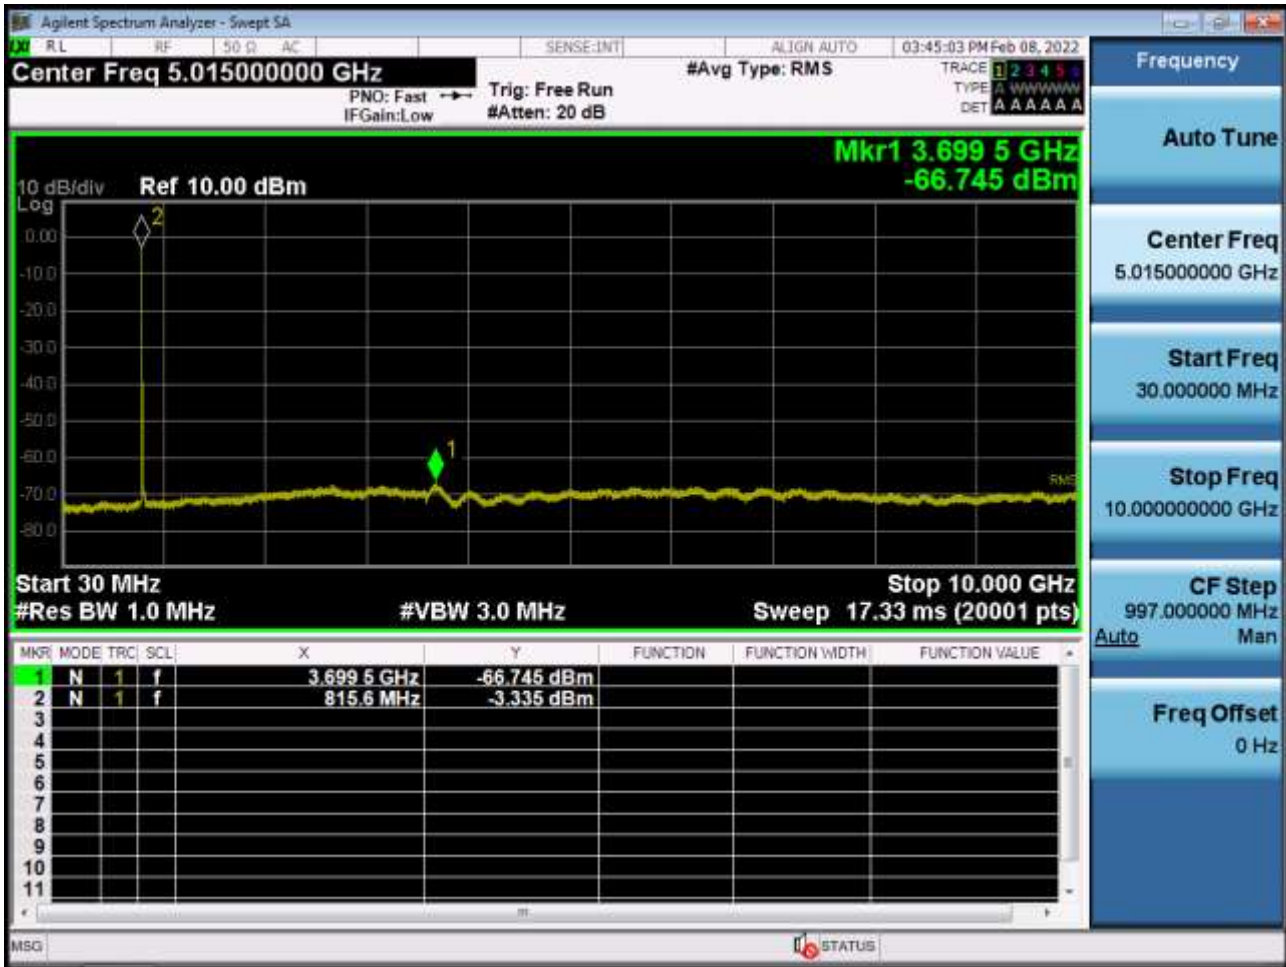


## 10. TEST PLOTS (STRADDLE CHANNEL)




BAND 26. Conducted Spurious (1.4 MHz\_QPSK\_RB 1\_0)

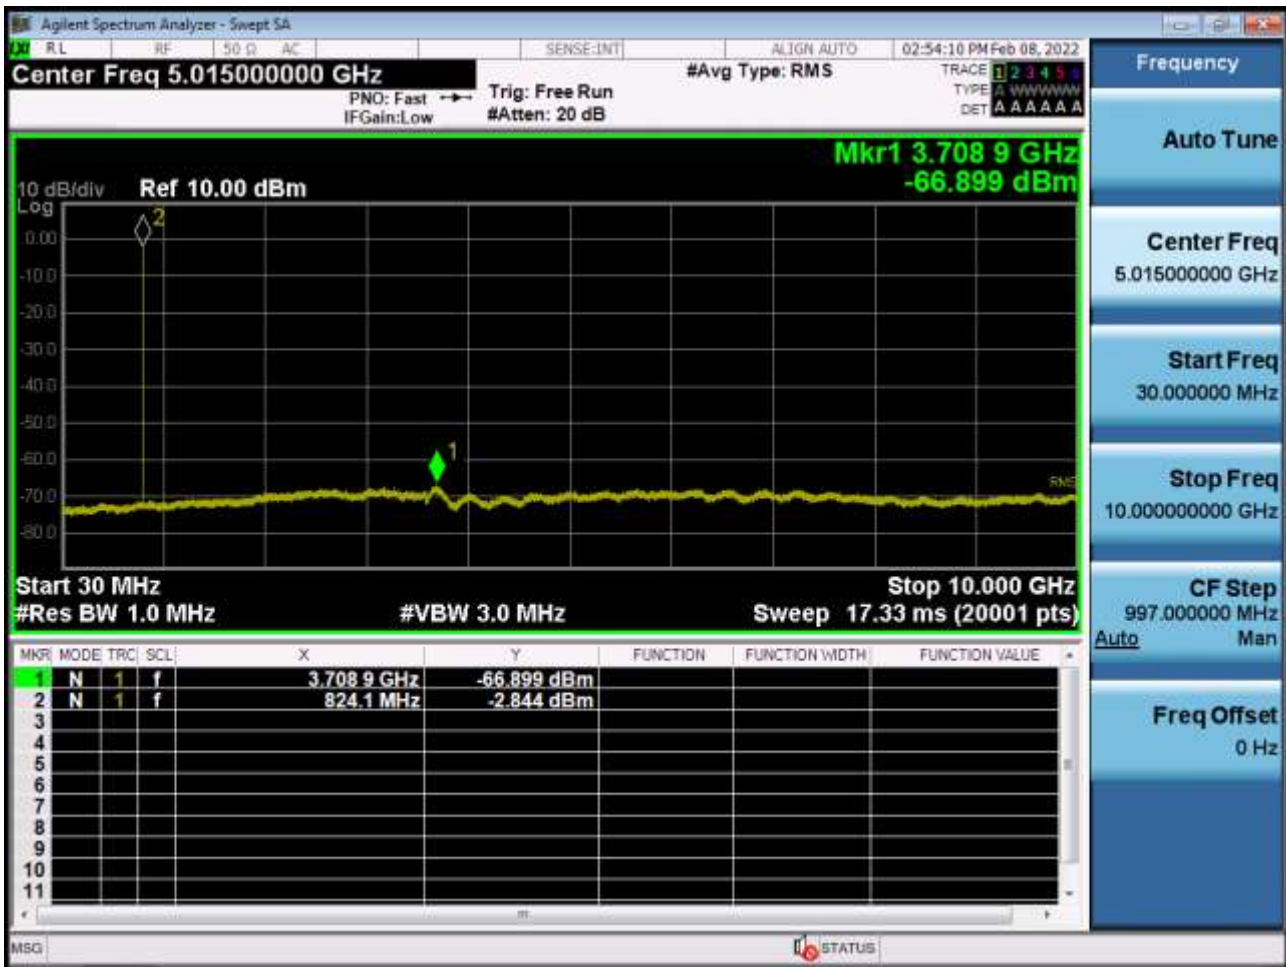


BAND 26. Conducted Spurious (3 MHz\_QPSK\_RB 1\_0)

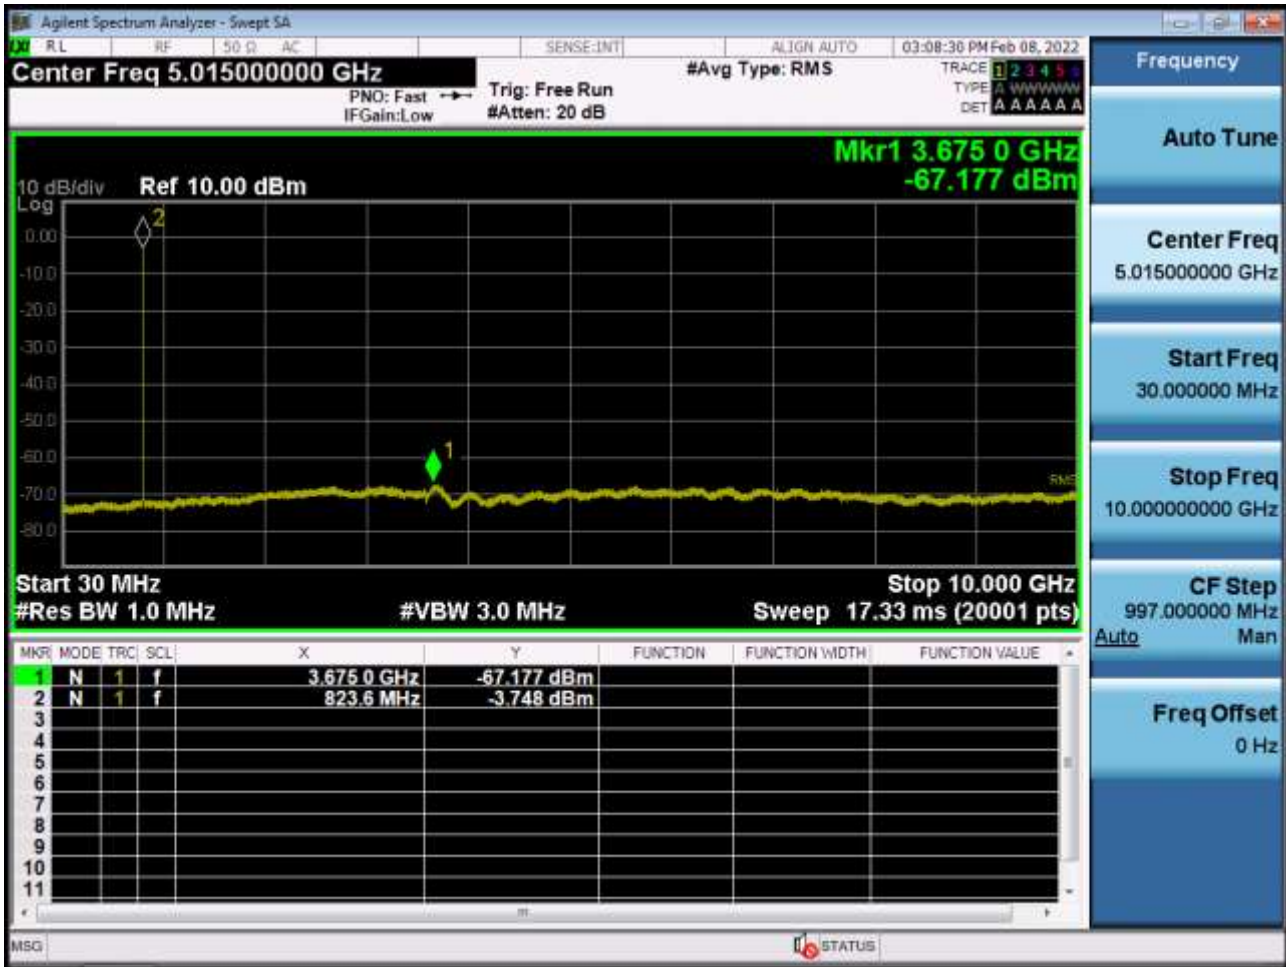


BAND 26. Conducted Spurious (5 MHz\_QPSK\_RB 1\_0)

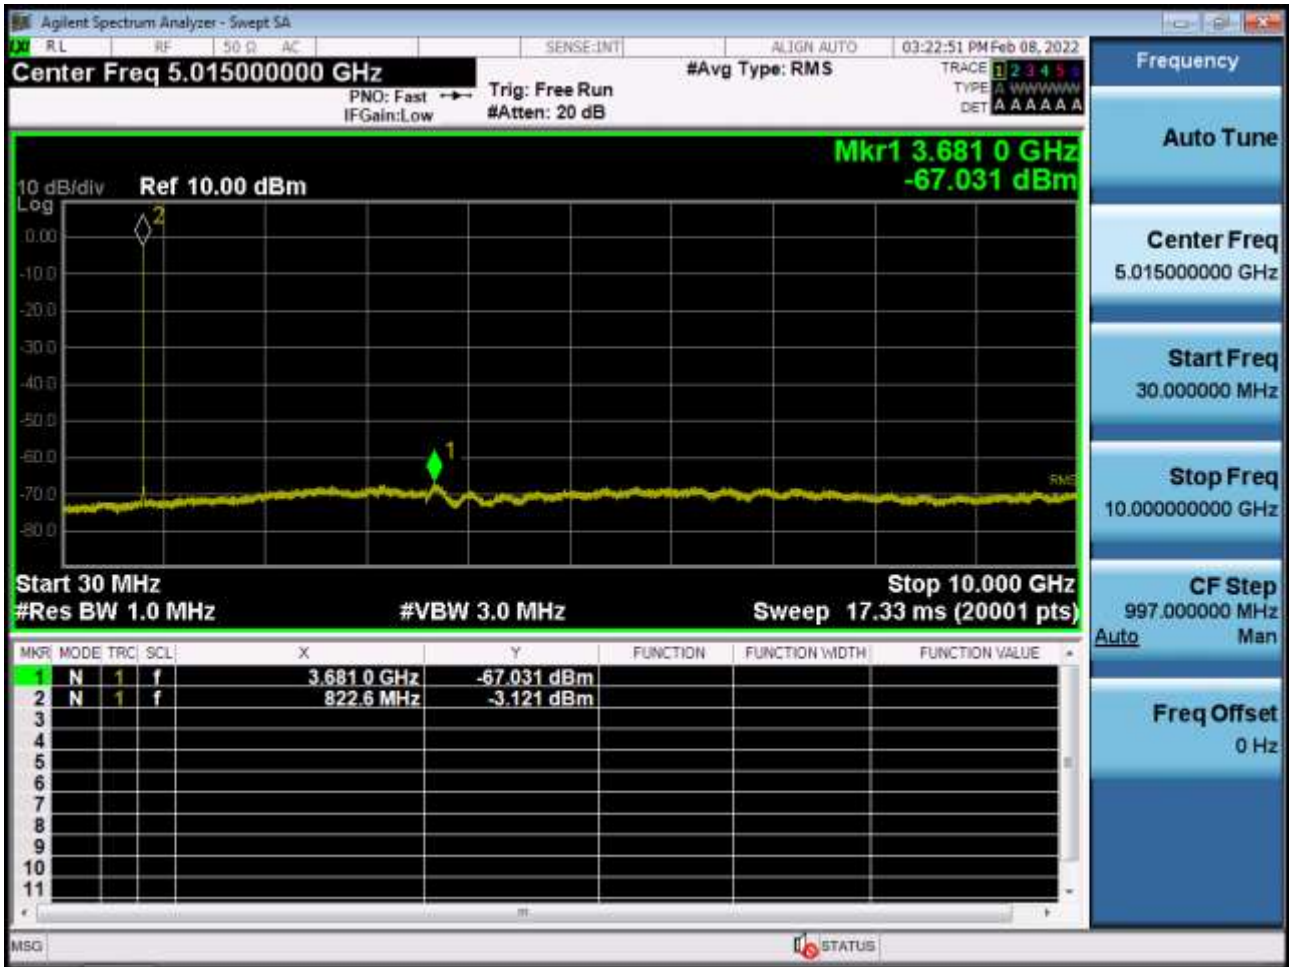


BAND 26. Conducted Spurious (10 MHz\_QPSK\_RB 1\_0)

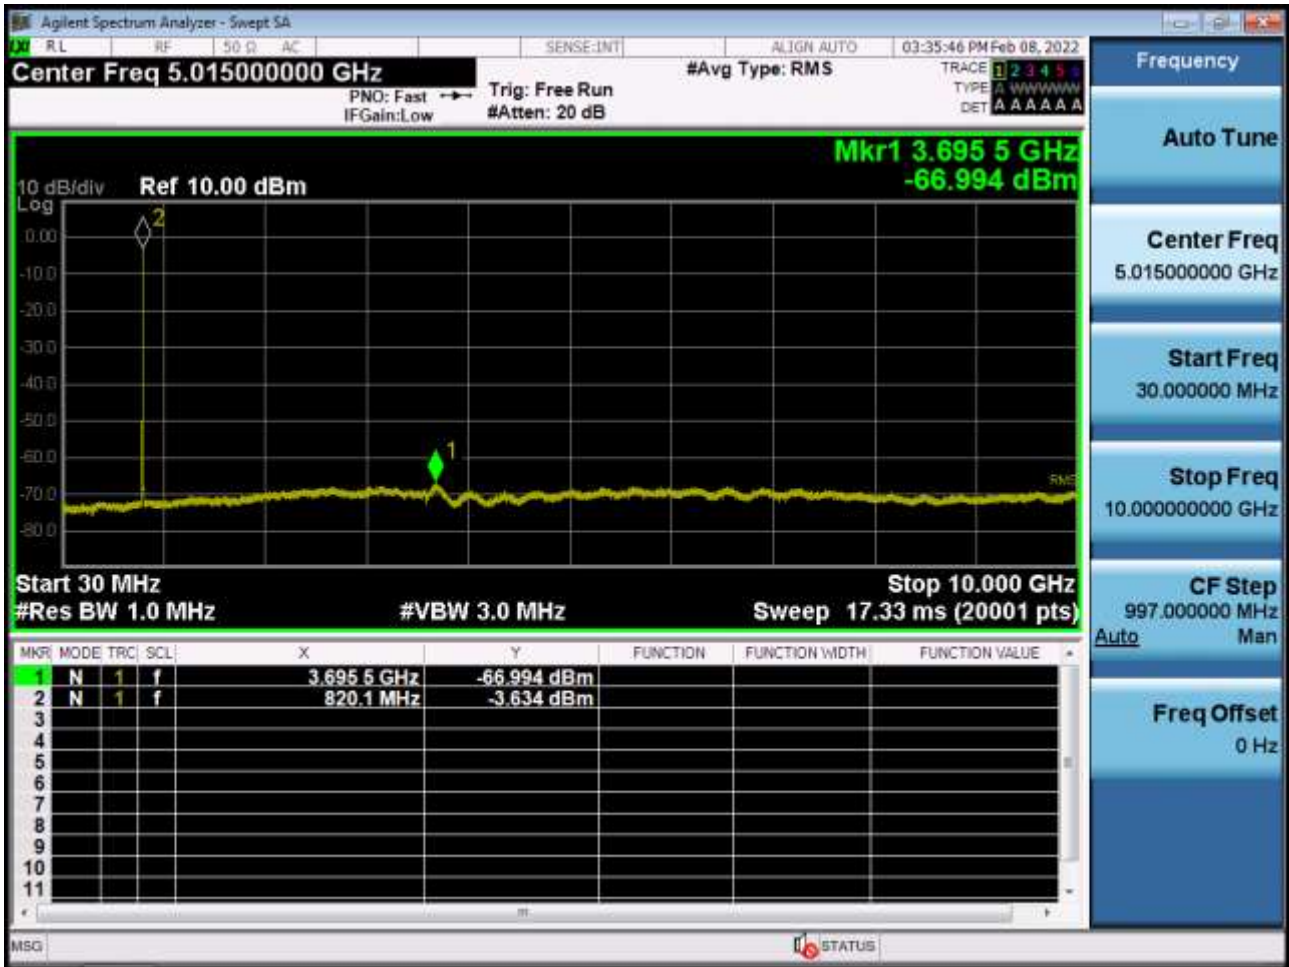

BAND 26. Channel Edge (1.4 MHz\_QPSK\_RB 1\_0)

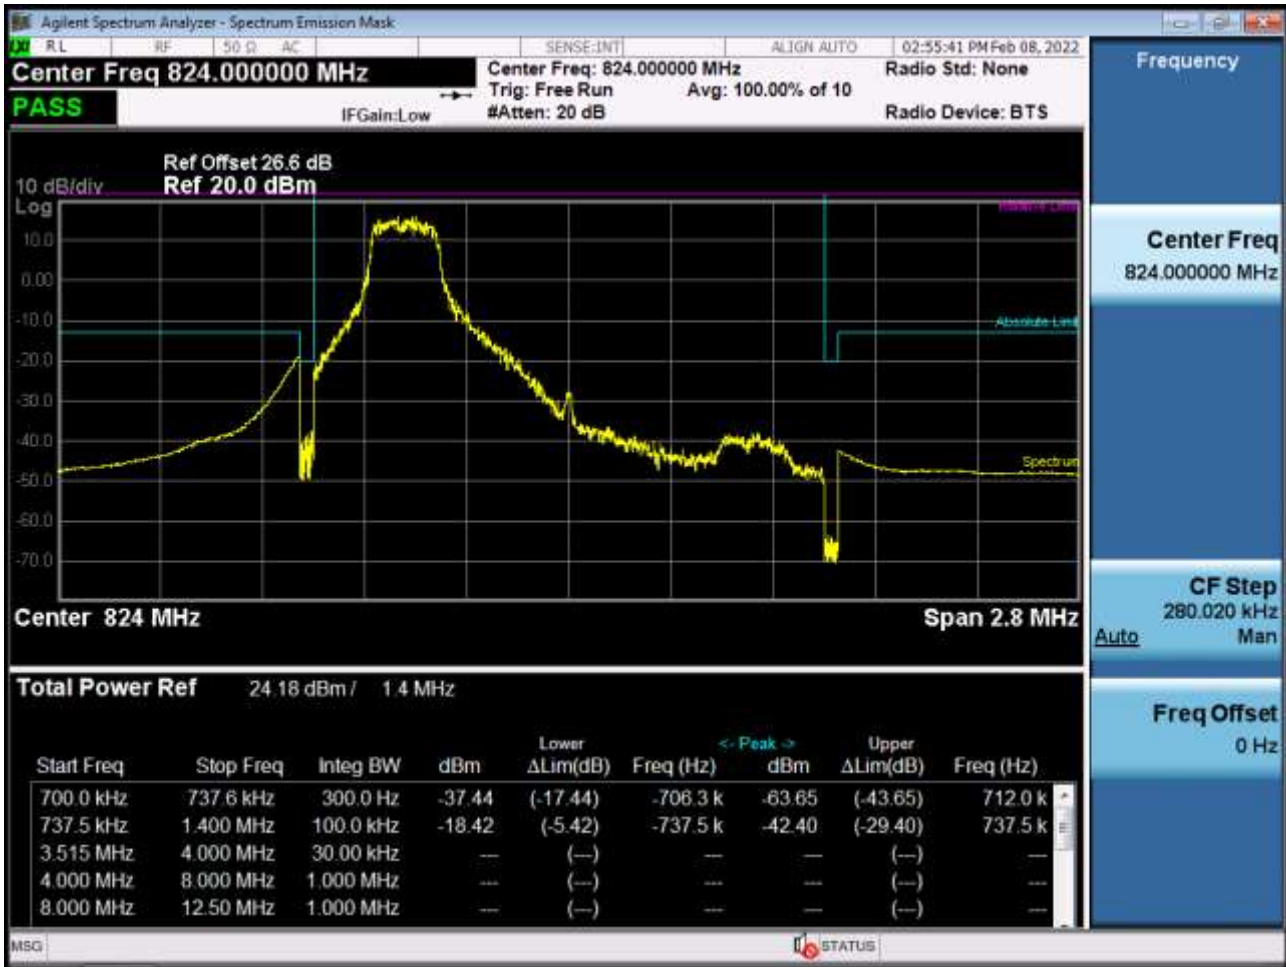


BAND 26. Channel Edge (1.4 MHz\_QPSK\_RB 1\_5)

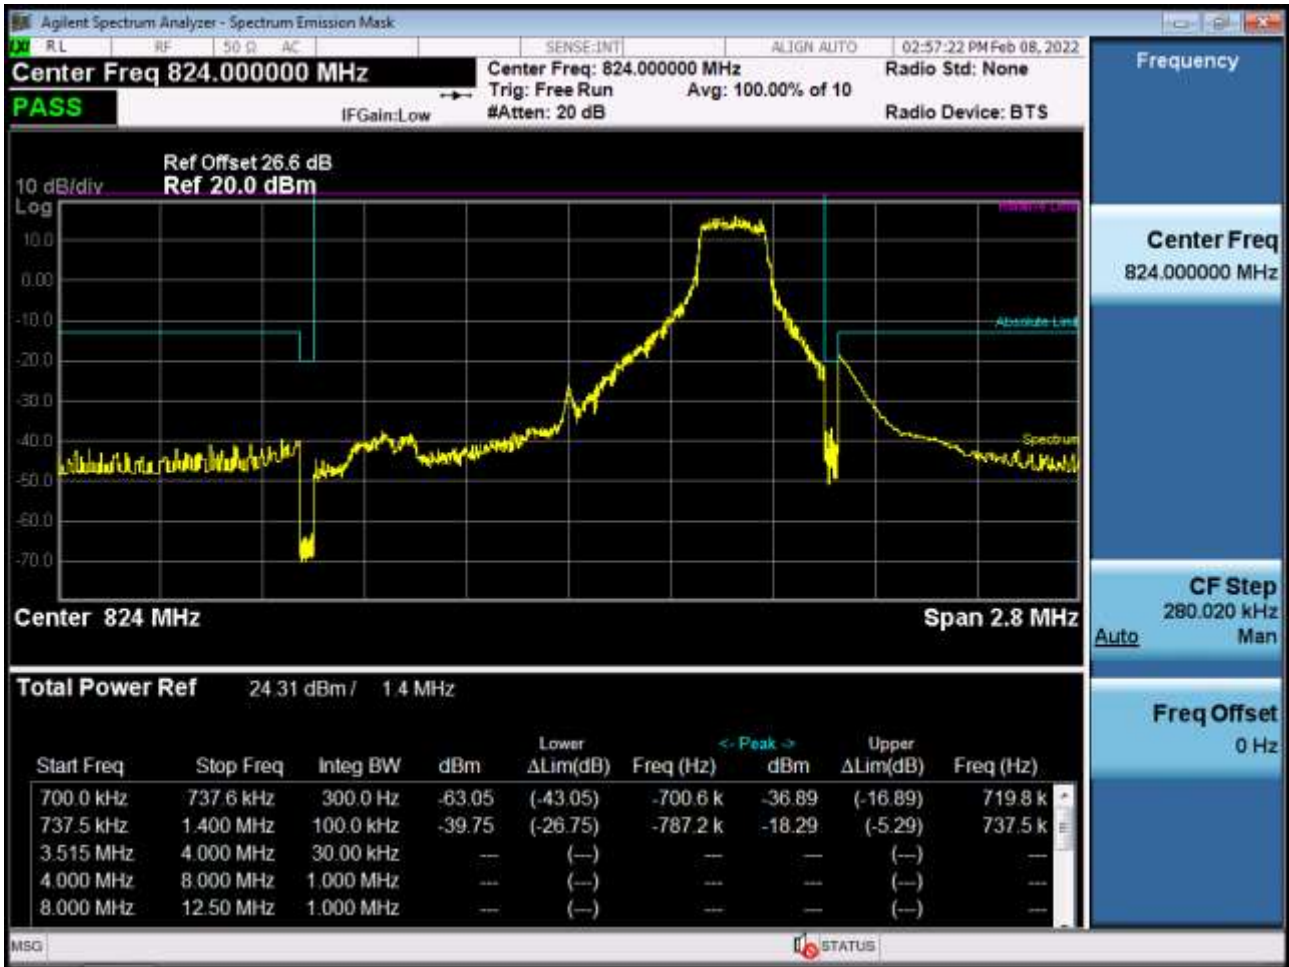

BAND 26. Channel Edge (1.4 MHz\_QPSK\_Full RB)




BAND 26. Channel Edge (3 MHz\_QPSK\_RB 1\_0)

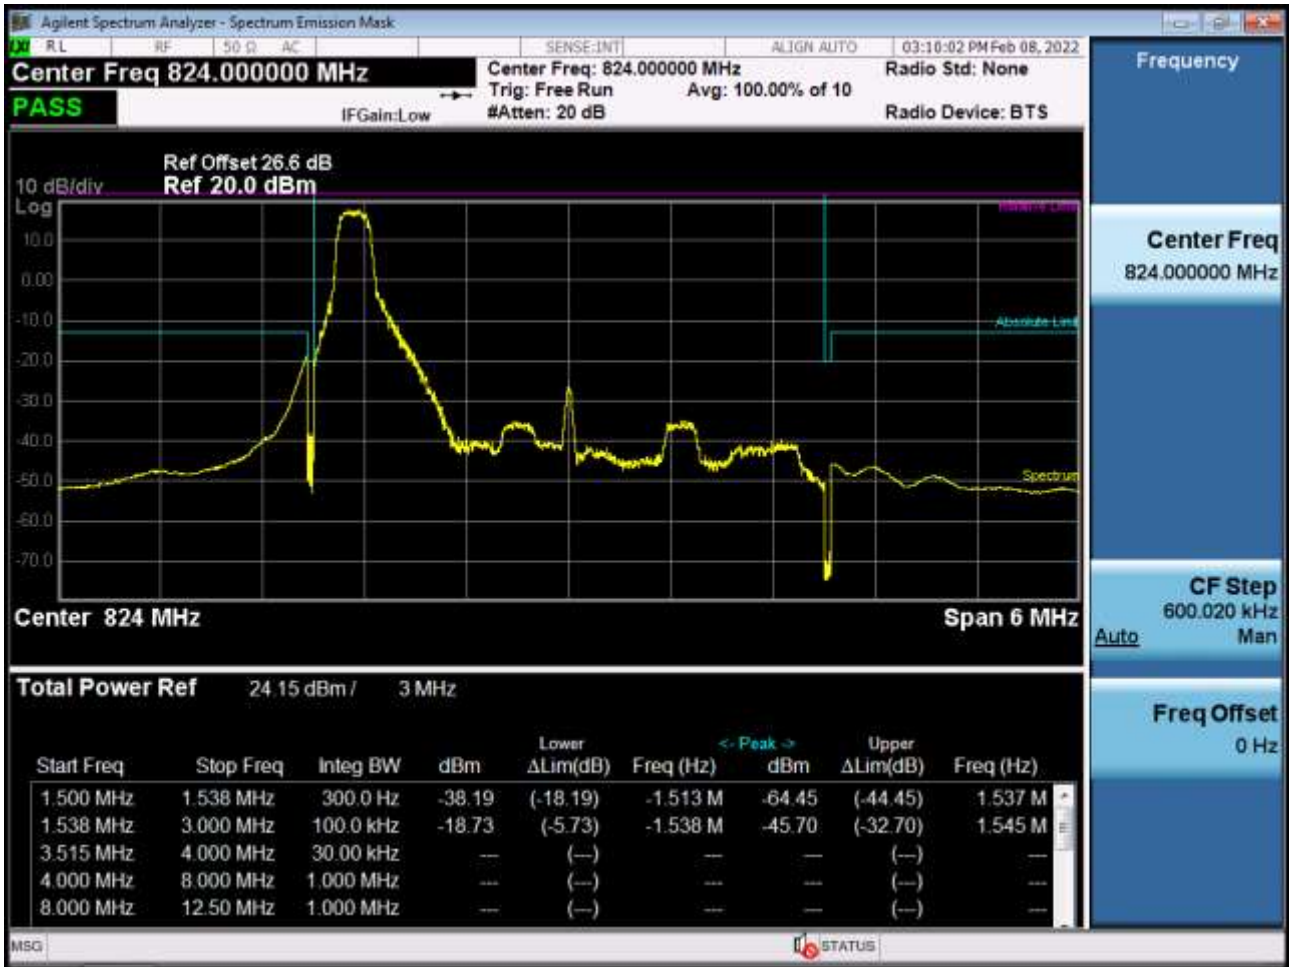





BAND 26. Channel Edge (3 MHz\_QPSK\_RB 1\_14)

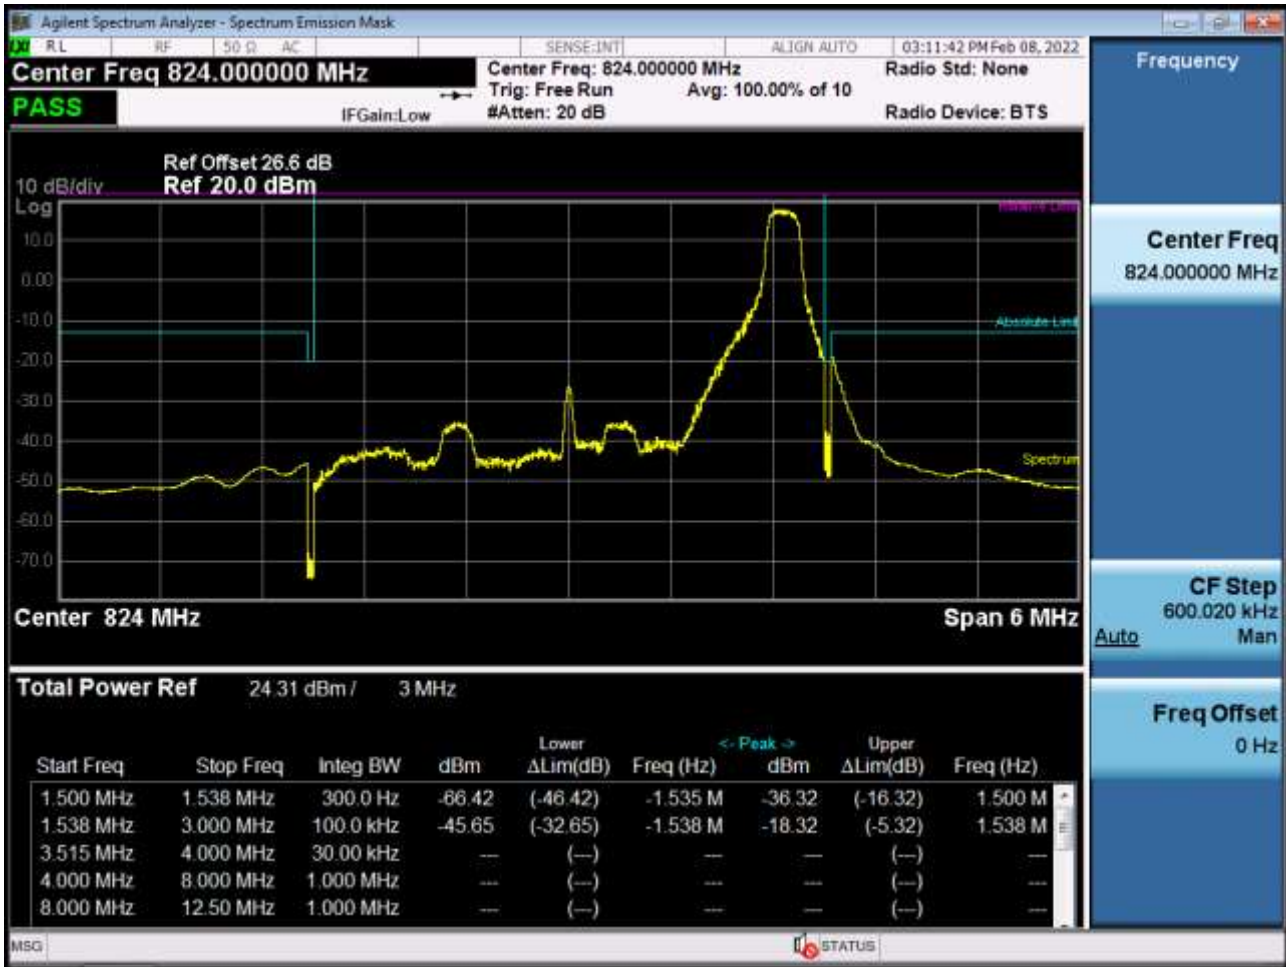


BAND 26. Channel Edge (3 MHz\_QPSK\_Full RB)

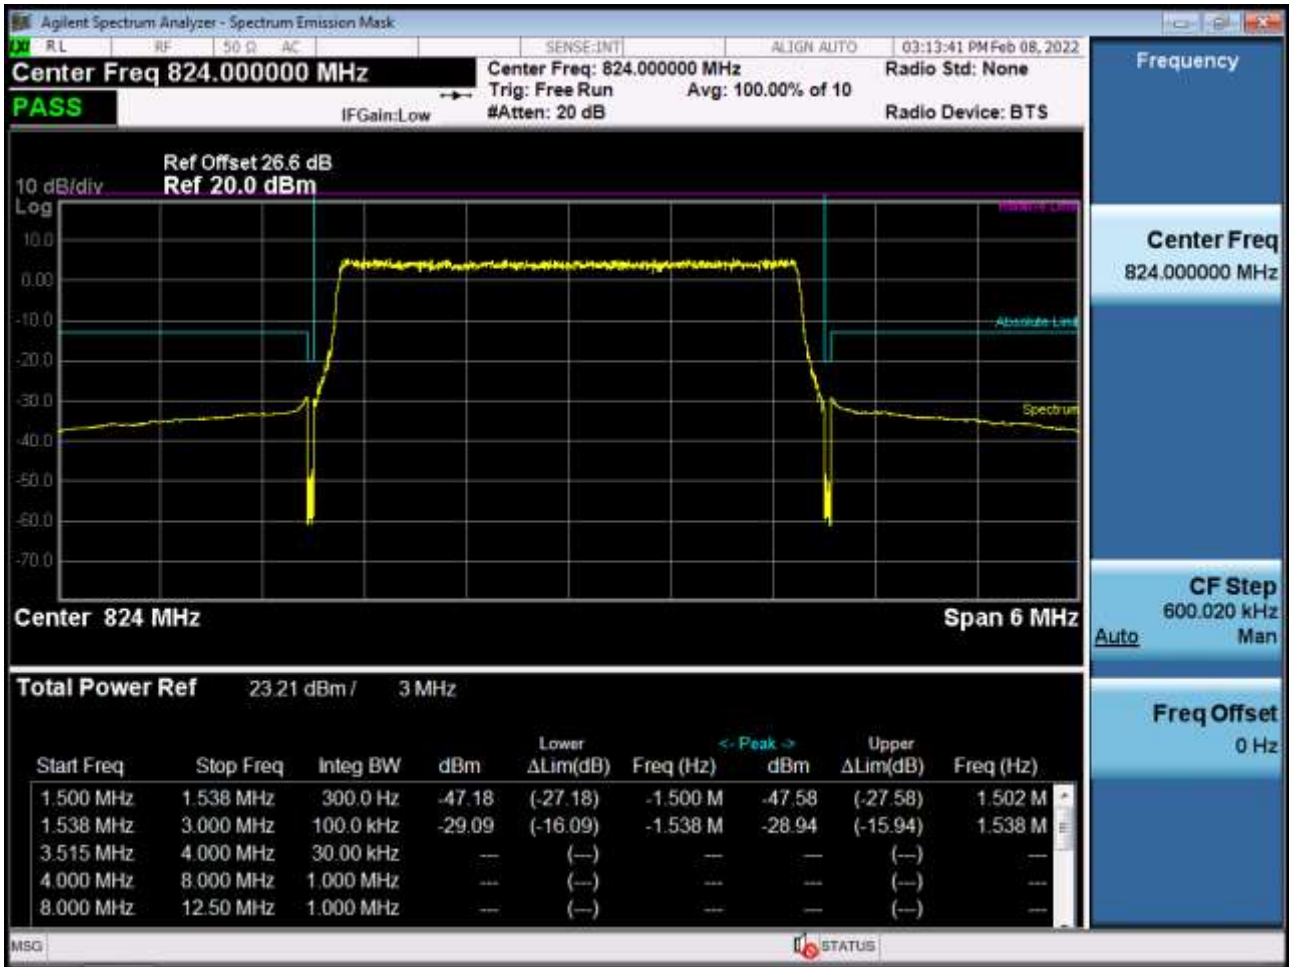

BAND 26. Channel Edge (5 MHz\_QPSK\_RB 1\_0)

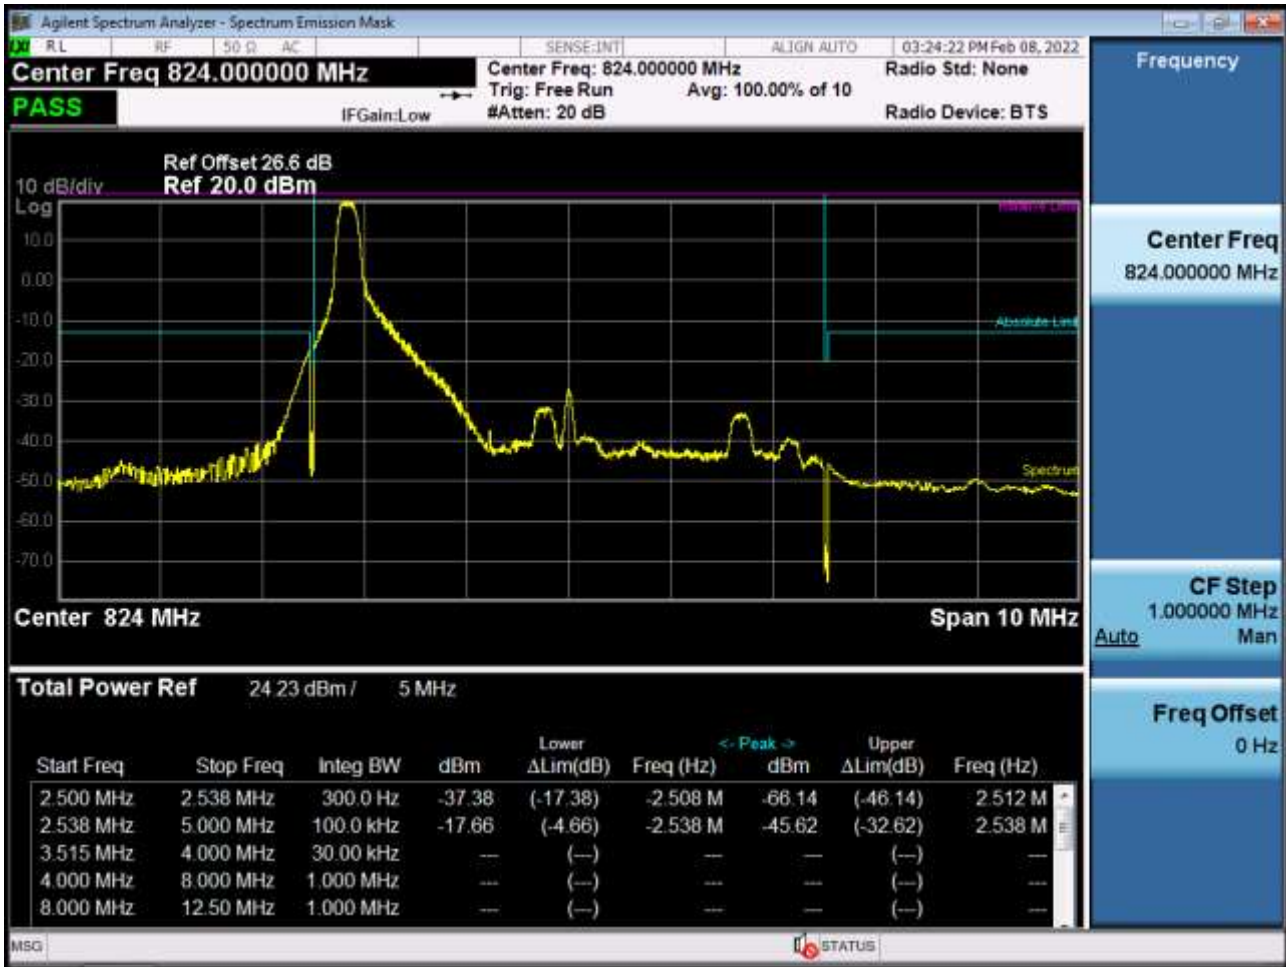


BAND 26. Channel Edge (5 MHz\_QPSK\_RB 1\_24)

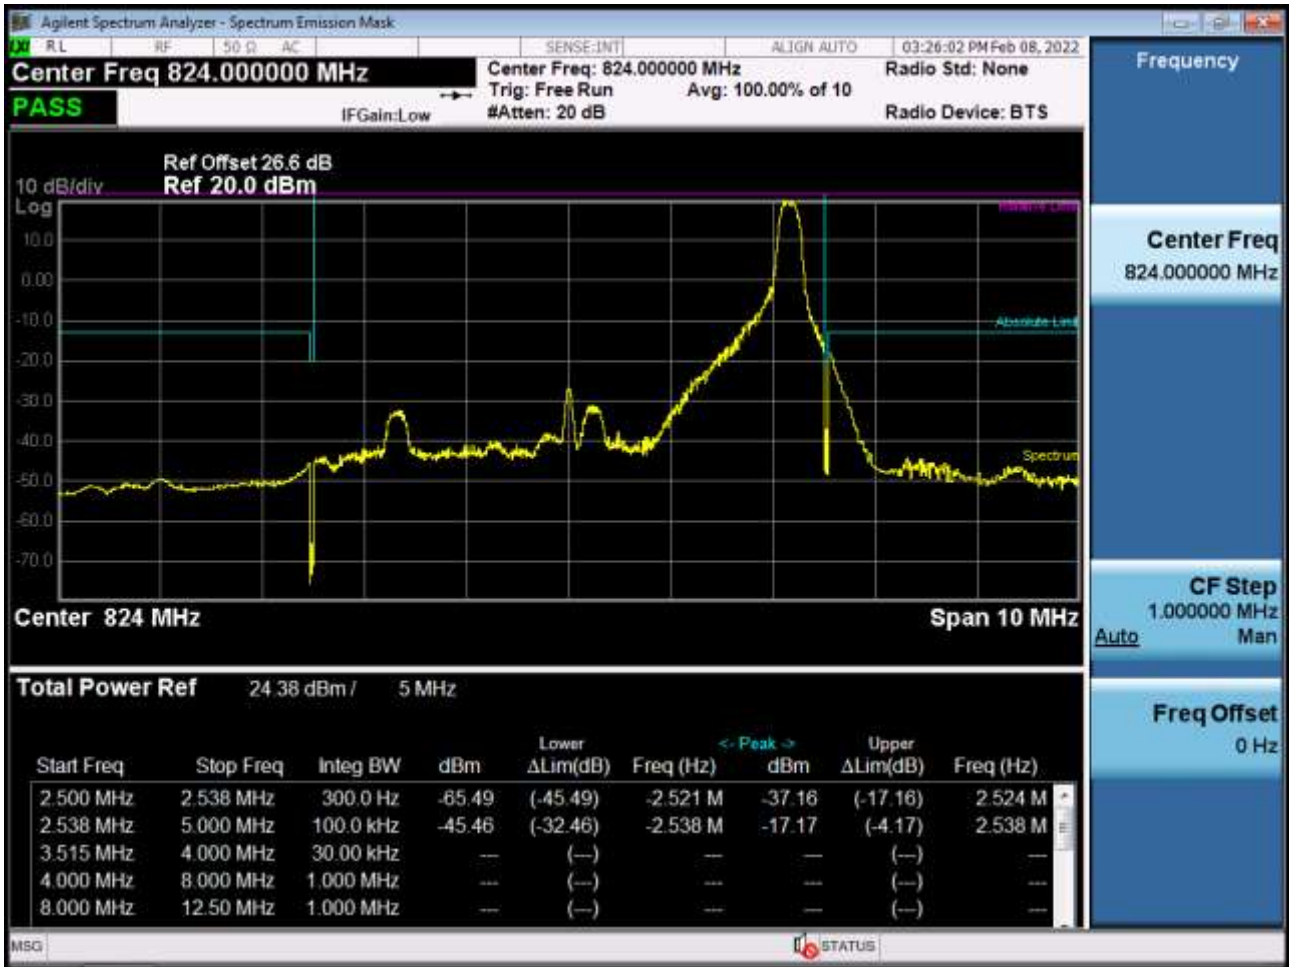


BAND 26. Channel Edge (5 MHz\_QPSK\_Full RB)



BAND 26. Channel Edge (10 MHz\_QPSK\_RB 1\_0)

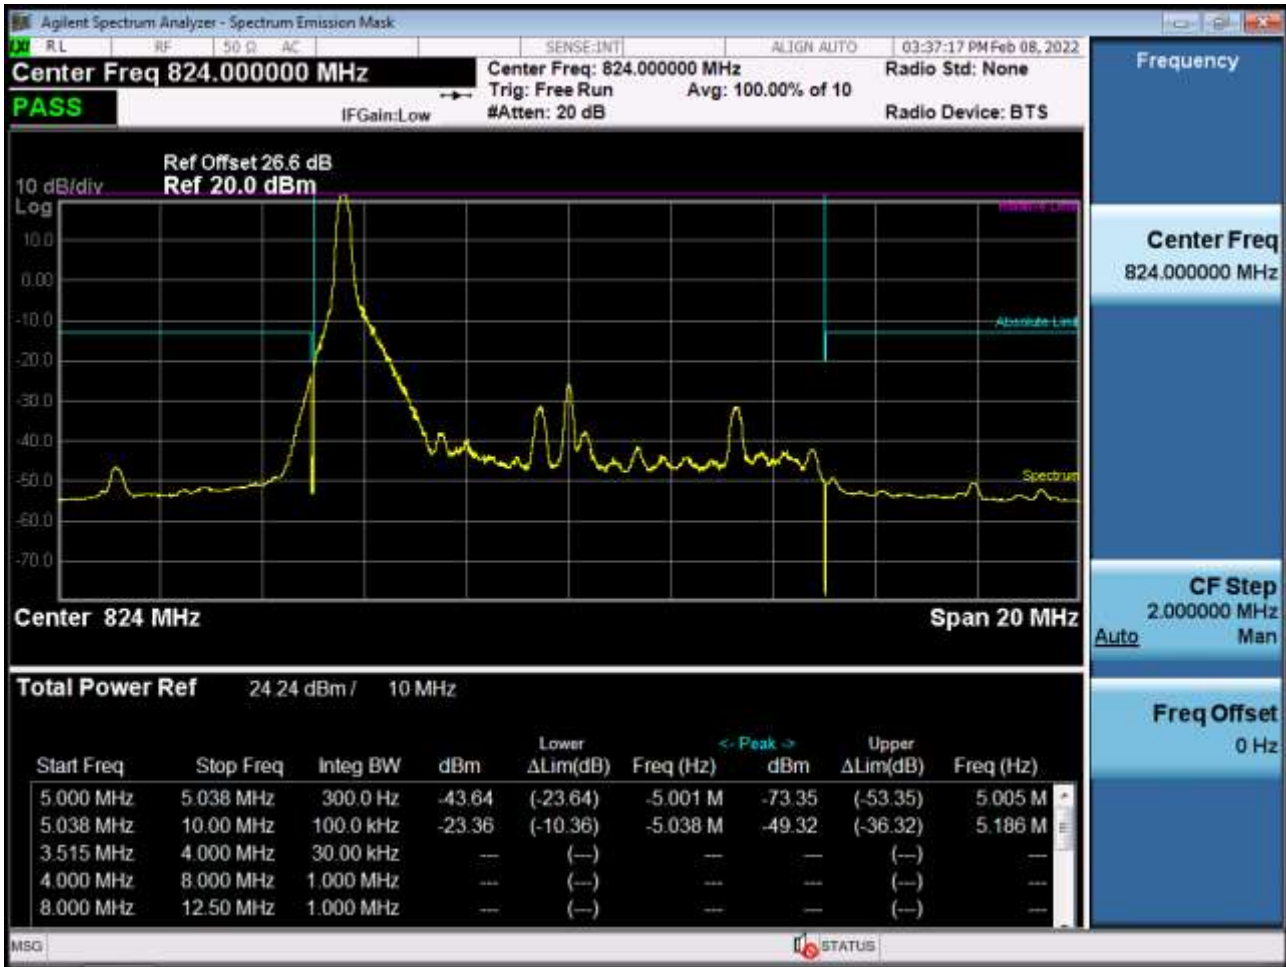

BAND 26. Channel Edge (10 MHz\_QPSK\_RB 1\_49)

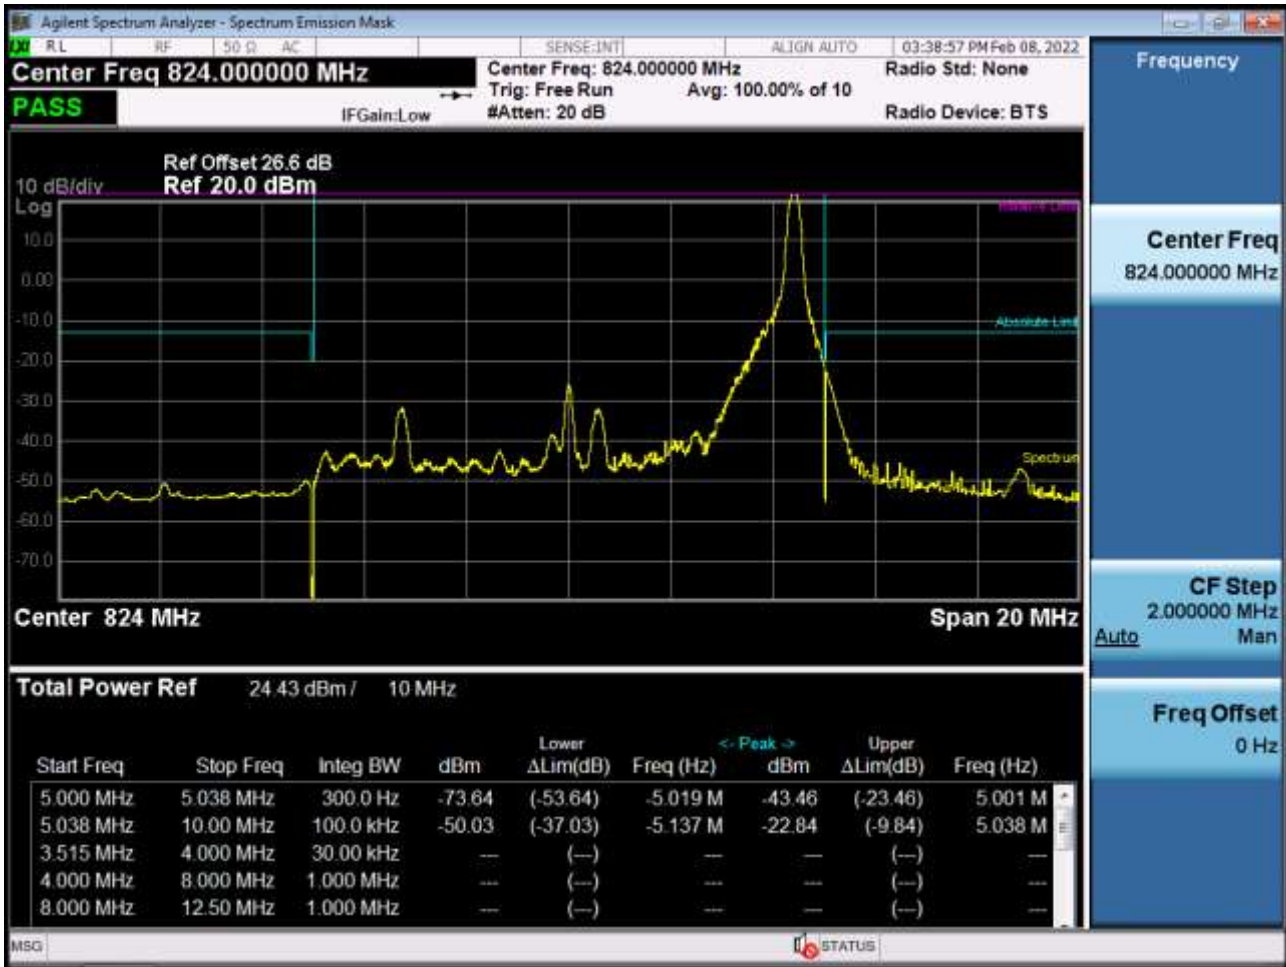


BAND 26. Channel Edge (10 MHz\_QPSK\_Full RB)







BAND 26. Band Edge (1.4 MHz\_QPSK\_RB 1\_5)

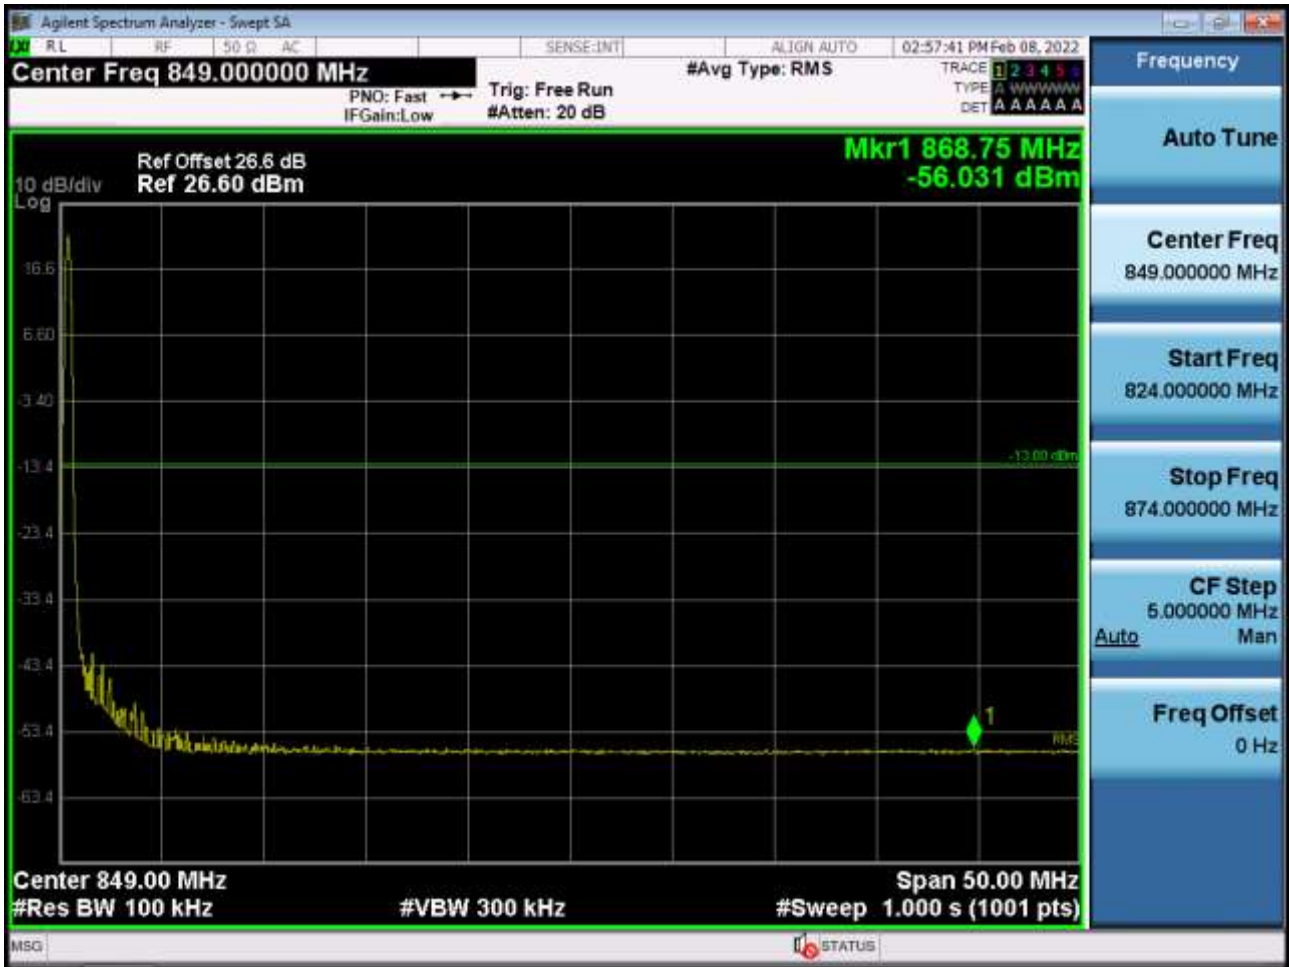

BAND 26. Band Edge (1.4 MHz\_QPSK\_FullIRB)

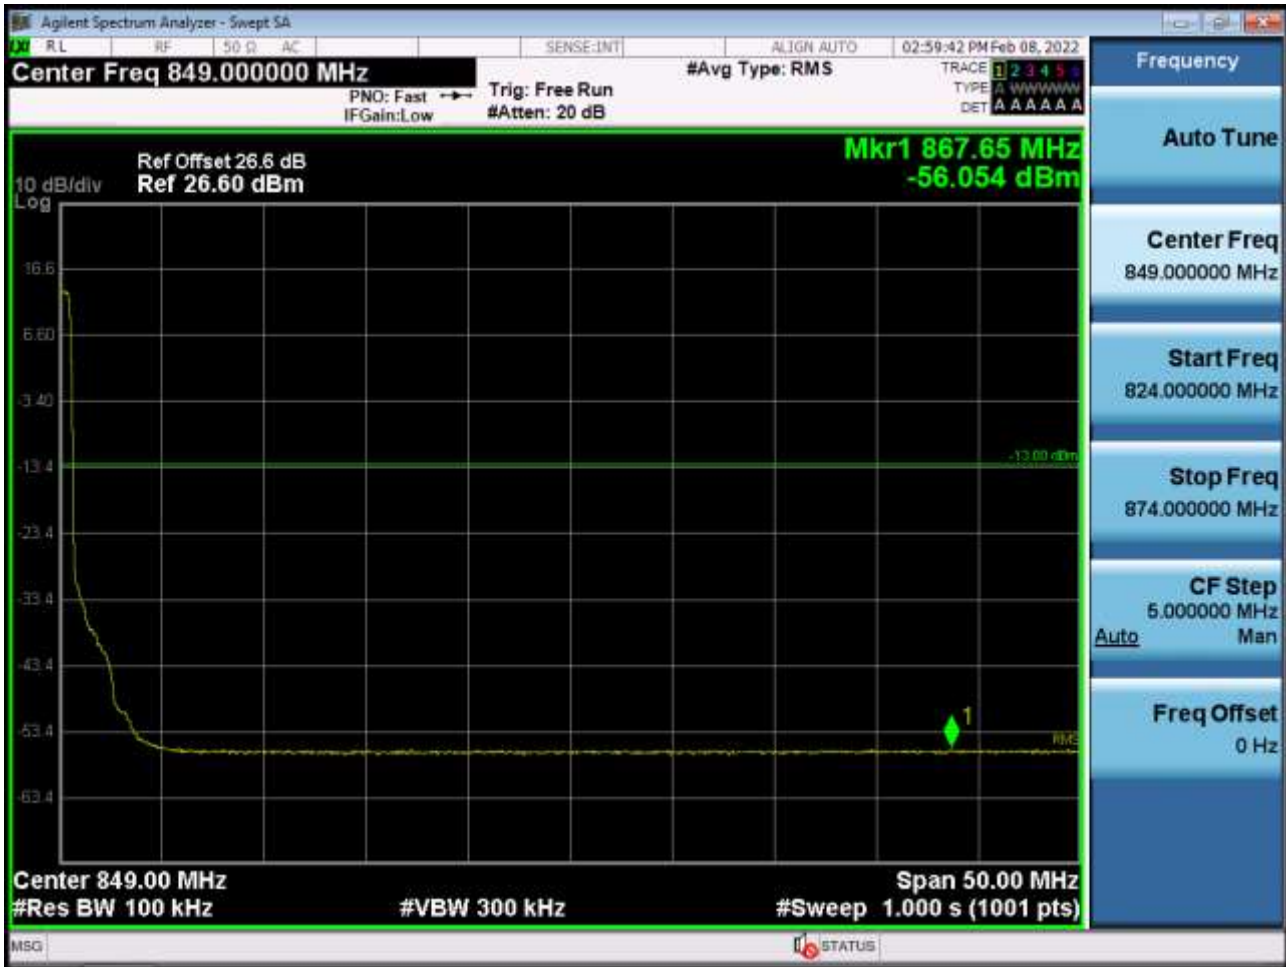

BAND 26. Band Edge (3 MHz\_QPSK\_RB 1\_14)

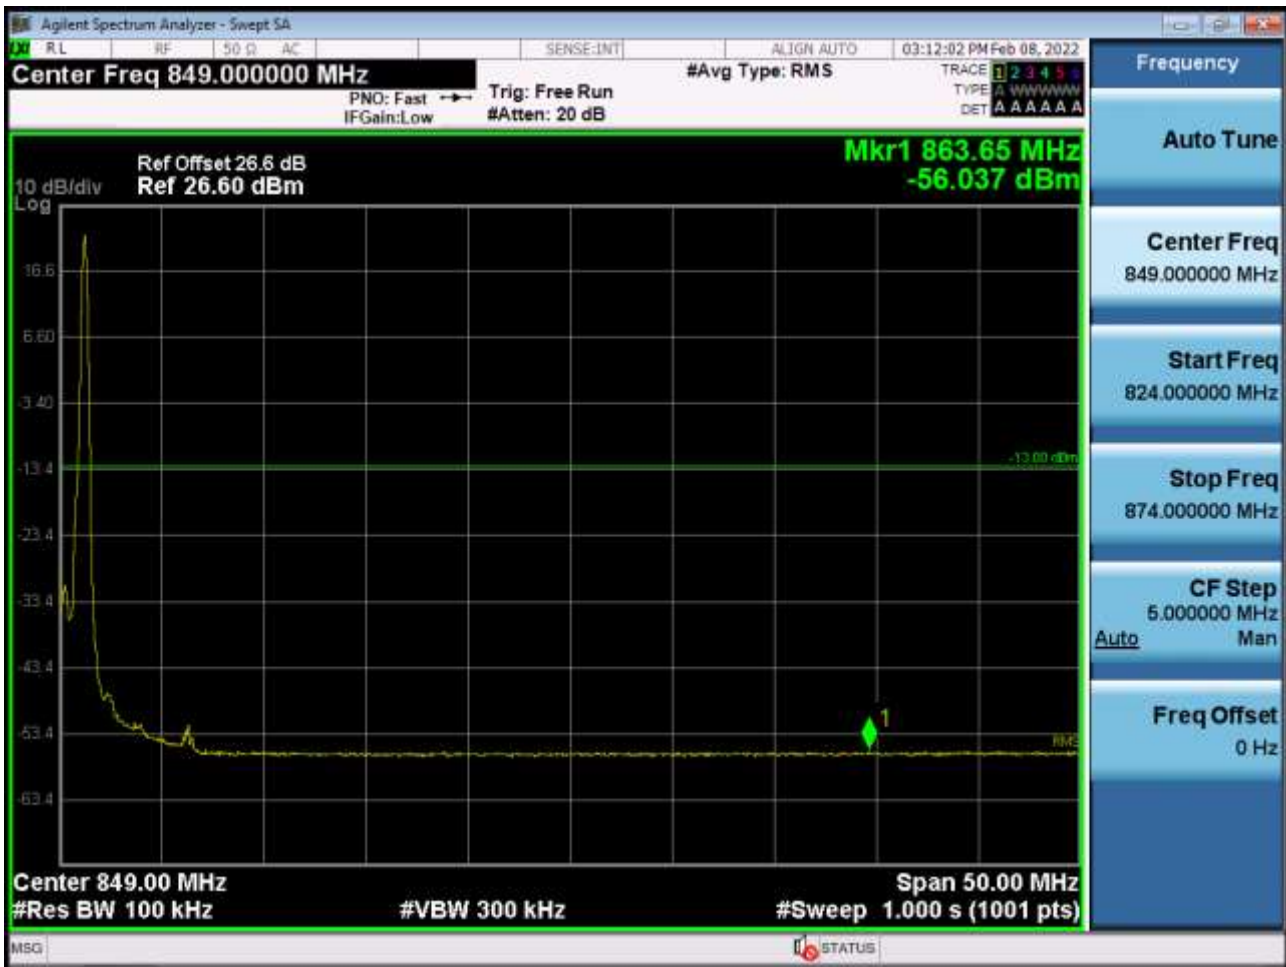

BAND 26. Band Edge (3 MHz\_QPSK\_ Full RB)



BAND 26. Band Edge (5 MHz\_QPSK\_RB 1\_24)



BAND 26. Band Edge (5 MHz\_QPSK\_ Full RB)



BAND 26. Band Edge (10 MHz\_QPSK\_RB 1\_49)



BAND 26. Band Edge (10 MHz\_QPSK\_ Full RB)





## 11 ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2203-FC014-P