

FCC Sub6 REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
March 04, 2022

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2203-FC018

FCC ID: A3LSMM536B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-M536B/DSN
 EUT Type: Mobile Phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
Sub6 n66 (5)	1712.5 – 1777.5	4M49G7D	PI/2 BPSK	0.128	21.08
		4M48G7D	QPSK	0.128	21.07
		4M49W7D	16QAM	0.115	20.61
		4M47W7D	64QAM	0.073	18.66
		4M51W7D	256QAM	0.046	16.64
Sub6 n66 (10)	1715.0 – 1775.0	8M97G7D	PI/2 BPSK	0.130	21.14
		8M97G7D	QPSK	0.128	21.07
		8M99W7D	16QAM	0.113	20.53
		8M98W7D	64QAM	0.073	18.62
		8M96W7D	256QAM	0.047	16.75
Sub6 n66 (15)	1717.5 – 1772.5	13M5G7D	PI/2 BPSK	0.136	21.34
		13M5G7D	QPSK	0.132	21.22
		13M5W7D	16QAM	0.119	20.74
		13M5W7D	64QAM	0.077	18.85
		13M4W7D	256QAM	0.049	16.86
Sub6 n66 (20)	1720.0 – 1770.0	17M9G7D	PI/2 BPSK	0.136	21.33
		17M9G7D	QPSK	0.136	21.32
		17M9W7D	16QAM	0.123	20.89
		17M9W7D	64QAM	0.078	18.92
		18M0W7D	256QAM	0.049	16.91
Sub6 n66 (25)	1722.5 – 1767.5	22M9G7D	PI/2 BPSK	0.133	21.23
		23M0G7D	QPSK	0.132	21.22
		22M9W7D	16QAM	0.121	20.83
		22M9W7D	64QAM	0.077	18.85
		22M9W7D	256QAM	0.048	16.80
Sub6 n66 (30)	1725.0 – 1765.0	28M6G7D	PI/2 BPSK	0.129	21.10
		28M6G7D	QPSK	0.129	21.09
		28M7W7D	16QAM	0.115	20.61
		28M6W7D	64QAM	0.073	18.66
		28M6W7D	256QAM	0.048	16.84
Sub6 n66 (40)	1730.0 – 1760.0	38M7G7D	PI/2 BPSK	0.125	20.96
		38M6G7D	QPSK	0.124	20.94
		38M7W7D	16QAM	0.110	20.43
		38M6W7D	64QAM	0.071	18.53
		38M7W7D	256QAM	0.046	16.65

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2203-FC018

REVIEWED BY



Report prepared by : Jung Ki Lim
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2203-FC018	March 04, 2022	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT.....	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST)	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION	22
8. TEST DATA	24
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	24
8.2 RADIATED SPURIOUS EMISSIONS	31
8.3 PEAK-TO-AVERAGE RATIO.....	32
8.4 OCCUPIED BANDWIDTH	33
8.5 CONDUCTED SPURIOUS EMISSIONS	34
8.6 BAND EDGE	35
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	36
9. TEST PLOTS.....	43
10. ANNEX A_ TEST SETUP PHOTO.....	198

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMM536B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile Phone
Model(s):	SM-M536B/DSN
SCS(kHz):	15
Bandwidth(MHz):	5, 10, 15, 20, 25, 30, 40
Waveform:	CP-OFDM, DFT-S-OFDM
Modulation:	DFT-S-OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
Tx Frequency:	1712.5 MHz – 1777.5 MHz (Sub6 n66(5 MHz)) 1715.0 MHz – 1775.0 MHz (Sub6 n66(10 MHz)) 1717.5 MHz – 1772.5 MHz (Sub6 n66(15 MHz)) 1720.0 MHz – 1770.0 MHz (Sub6 n66(20 MHz)) 1722.5 MHz – 1767.5 MHz (Sub6 n66(25 MHz)) 1725.0 MHz – 1765.0 MHz (Sub6 n66(30 MHz)) 1730.0 MHz – 1760.0 MHz (Sub6 n66(40 MHz))
Date(s) of Tests:	January 25, 2022 ~ March 04, 2022
Serial number:	Radiated: R3CRC0LNPAE Conducted: R3CRC0LNQJN

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac (20/40/80), Bluetooth, BT LE, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

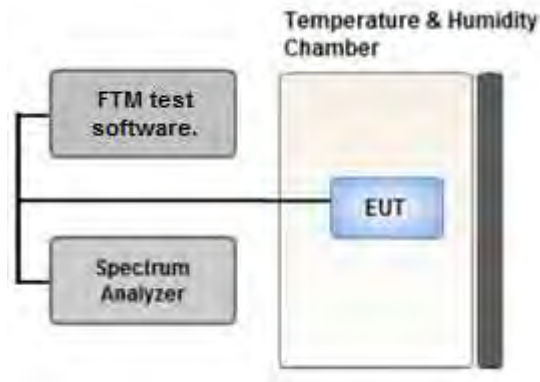

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

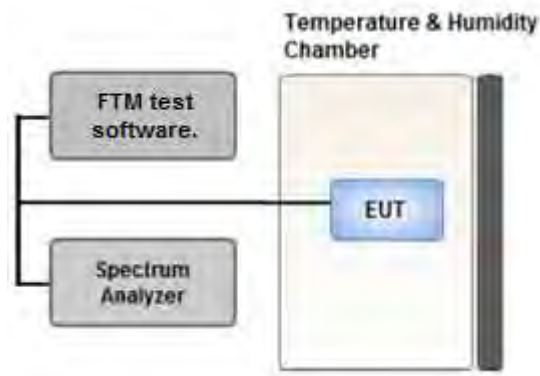

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

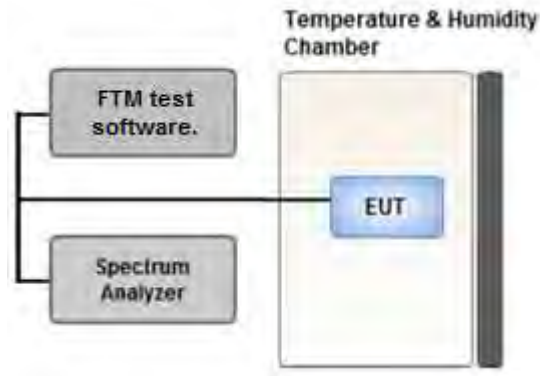

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

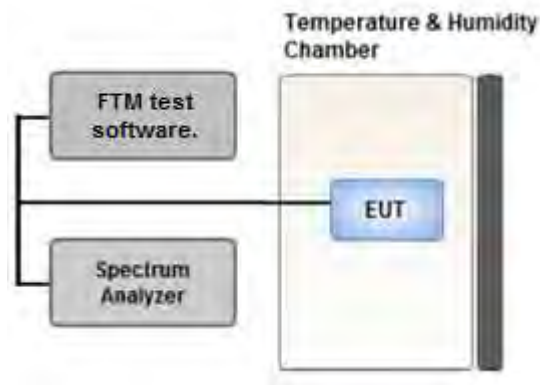

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

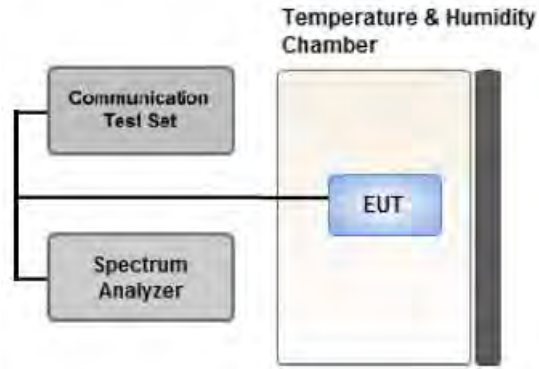

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at

least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.

- All modes of operation were investigated and the worst case configuration results are reported.

Mode : SA, NSA

Worst case: SA

Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)

Worst case : Stand alone

- We were performed the RSE test in condition of co-location. There has no significant emission raised.

Mode : WWAN + WLAN 5 GHz + BT (Worst case : Stand alone)

- Radiated Spurious emissions are measured while operating in EN-DC mode with Sub 6 NR carrier as well as an LTE carrier (anchor).

All EN-DC mode of operation were investigated and the worst case configuration results are reported.

(Worst case: 12A(10 MHz) - n66A)

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

-In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported.

(Worst case : 15 MHz)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1	1	Z
Radiated Spurious and Harmonic Emissions	PI/2 BPSK	1	1	Y

3.10 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.

(Worst case: PI/2 BPSK)

- All modes of operation were investigated and the worst case configuration results are reported.

Mode : SA, NSA

Worst case: NSA(5A-n66A)

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth, Peak-To-Average Ratio	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20, 25, 30, 40	Mid	Full RB	0
Band Edge	PI/2 BPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	51
		15	Low	1	0
			High	1	78
		20	Low	1	0
			High	1	105
		25	Low	1	0
			High	1	132
		30	Low	1	0
			High	1	159
		40	Low	1	0
			High	1	215
		5, 10, 15, 20, 25, 30, 40	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	PI/2 BPSK	5, 10, 15, 20, 25, 30, 40	Low, Mid, High	1	1

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
Precision Dipole Antenna	UHAP	Schwarzbeck	01273	05/30/2022	Biennial
Precision Dipole Antenna	UHAP	Schwarzbeck	01274	05/30/2022	Biennial
Horn Antenna(1~18GHz)	BBHA 9120D	Schwarzbeck	02289	05/08/2022	Biennial
Horn Antenna(1~18GHz)	BBHA 9120D	Schwarzbeck	9120D-1299	05/04/2022	Biennial
Horn Antenna(15~40GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15~40GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	02/11/2022	Biennial
Loop Antenna(9kHz~30 MHz)	FMZB1513	Rohde & Schwarz	1513-175	05/18/2022	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/22/2023	Biennial
High Pass Filter	WHKX10-900-1000-15000-40SS	Wainwright Instruments	15	06/15/2022	Annual
High Pass Filter	WHKX10-2700-3000-18000-40SS	Wainwright Instruments	145	06/15/2022	Annual
High Pass Filter	WHNX6-4740-6000-26500-40CC	Wainwright Instruments	11	06/15/2022	Annual
LOW NOISE AMP (100 MHz ~ 18GHz)	CBLU1183540B-01	CERNEC	26822	06/15/2022	Annual
Power Amplifier	CBL18265035	CERNEC	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEC	25956	03/23/2022	Annual
DC Power Supply	E3632A	Hewlett Packard	MY40004427	09/15/2022	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Signal Analyzer(10Hz~26.5GHz)	N9020A	Agilent	MY51110063	04/22/2022	Annual
ATTENUATOR(20dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10Hz~40GHz)	FSV40	REOHDE & SCHWARZ	101436	02/25/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287700	05/25/2022	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/26/2022	Annual
SIGNAL GENERATOR (100kHz~40GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5Hz~40.0GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/27/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report
2. All conducted tests were tested using 5G Wireless Tester.

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

Note:

1. Radiated tests were tested using 5G Wireless Tester.

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
349000	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

PSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1712.5	Sub6 n66/ 5 MHz [15 kHz]	PI/2 BPSK	-19.49	13.37	9.76	2.08	V	< 1.00	0.127	21.05
		QPSK	-19.51	13.35	9.76	2.08	V		0.127	21.03
		16-QAM	-19.93	12.93	9.76	2.08	V		0.115	20.61
		64-QAM	-21.88	10.98	9.76	2.08	V		0.073	18.66
		256-QAM	-23.91	8.95	9.76	2.08	V		0.046	16.63
1745.0		PI/2 BPSK	-20.15	12.98	9.97	1.99	V		0.125	20.96
		QPSK	-20.17	12.96	9.97	1.99	V		0.124	20.94
		16-QAM	-20.66	12.47	9.97	1.99	V		0.111	20.45
		64-QAM	-22.58	10.55	9.97	1.99	V		0.071	18.53
		256-QAM	-24.47	8.66	9.97	1.99	V		0.046	16.64
1777.5		PI/2 BPSK	-20.11	13.10	10.12	2.14	V		0.128	21.08
		QPSK	-20.12	13.09	10.12	2.14	V		0.128	21.07
		16-QAM	-20.87	12.34	10.12	2.14	V		0.108	20.32
		64-QAM	-22.56	10.65	10.12	2.14	V		0.073	18.63
		256-QAM	-24.59	8.62	10.12	2.14	V		0.046	16.60

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1715.0	Sub6 n66/ 10 MHz [15 kHz]	PI/2 BPSK	-19.73	13.29	9.79	2.07	V	< 1.00	0.126	21.01
		QPSK	-19.76	13.26	9.79	2.07	V		0.125	20.98
		16-QAM	-20.21	12.81	9.79	2.07	V		0.113	20.53
		64-QAM	-22.17	10.85	9.79	2.07	V		0.072	18.57
		256-QAM	-24.02	9.00	9.79	2.07	V		0.047	16.72
1745.0		PI/2 BPSK	-20.32	12.81	9.97	1.99	V		0.120	20.79
		QPSK	-20.39	12.74	9.97	1.99	V		0.118	20.72
		16-QAM	-20.79	12.34	9.97	1.99	V		0.108	20.32
		64-QAM	-22.81	10.32	9.97	1.99	V		0.068	18.30
		256-QAM	-24.78	8.35	9.97	1.99	V		0.043	16.33
1775.0	PI/2 BPSK	-20.05	13.18	10.10	2.14	V	0.130	21.14		
	QPSK	-20.12	13.11	10.10	2.14	V	0.128	21.07		
	16-QAM	-20.91	12.32	10.10	2.14	V	0.107	20.28		
	64-QAM	-22.57	10.66	10.10	2.14	V	0.073	18.62		
	256-QAM	-24.44	8.79	10.10	2.14	V	0.047	16.75		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
									W	W dBm
1717.5	Sub6 n66/ 15 MHz [15 kHz]	PI/2 BPSK	-19.58	13.41	9.82	2.07	V	< 1.00	0.131	21.16
		QPSK	-19.60	13.39	9.82	2.07	V		0.130	21.14
		16-QAM	-20.00	12.99	9.82	2.07	V		0.119	20.74
		64-QAM	-21.94	11.05	9.82	2.07	V		0.076	18.80
		256-QAM	-23.97	9.02	9.82	2.07	V		0.048	16.77
1745.0		PI/2 BPSK	-20.36	12.77	9.97	1.99	V		0.119	20.75
		QPSK	-20.37	12.76	9.97	1.99	V		0.119	20.74
		16-QAM	-20.85	12.28	9.97	1.99	V		0.106	20.26
		64-QAM	-22.80	10.33	9.97	1.99	V		0.068	18.31
		256-QAM	-24.74	8.39	9.97	1.99	V		0.043	16.37
1772.5	PI/2 BPSK	-19.88	13.39	10.08	2.13	V	0.136	21.34		
	QPSK	-20.00	13.27	10.08	2.13	V	0.132	21.22		
	16-QAM	-20.78	12.49	10.08	2.13	V	0.111	20.44		
	64-QAM	-22.37	10.90	10.08	2.13	V	0.077	18.85		
	256-QAM	-24.36	8.91	10.08	2.13	V	0.049	16.86		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1720.0	Sub6 n66/ 20 MHz [15 kHz]	PI/2 BPSK	-19.61	13.56	9.82	2.05	V	< 1.00	0.136	21.33
		QPSK	-19.62	13.55	9.82	2.05	V		0.136	21.32
		16-QAM	-20.05	13.12	9.82	2.05	V		0.123	20.89
		64-QAM	-22.02	11.15	9.82	2.05	V		0.078	18.92
		256-QAM	-24.03	9.14	9.82	2.05	V		0.049	16.91
1745.0		PI/2 BPSK	-20.35	12.78	9.97	1.99	V		0.119	20.76
		QPSK	-20.36	12.77	9.97	1.99	V		0.119	20.75
		16-QAM	-20.79	12.34	9.97	1.99	V		0.108	20.32
		64-QAM	-22.76	10.37	9.97	1.99	V		0.068	18.35
		256-QAM	-24.62	8.51	9.97	1.99	V		0.045	16.49
1770.0	PI/2 BPSK	-20.17	13.15	10.08	2.13	V	0.129	21.10		
	QPSK	-20.18	13.14	10.08	2.13	V	0.129	21.09		
	16-QAM	-20.99	12.33	10.08	2.13	V	0.107	20.28		
	64-QAM	-22.58	10.74	10.08	2.13	V	0.074	18.69		
	256-QAM	-24.45	8.87	10.08	2.13	V	0.048	16.82		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1722.5	Sub6 n66/ 25 MHz [15 kHz]	PI/2 BPSK	-19.71	13.46	9.82	2.05	V	< 1.00	0.133	21.23
		QPSK	-19.72	13.45	9.82	2.05	V		0.132	21.22
		16-QAM	-20.11	13.06	9.82	2.05	V		0.121	20.83
		64-QAM	-22.09	11.08	9.82	2.05	V		0.077	18.85
		256-QAM	-24.14	9.03	9.82	2.05	V		0.048	16.80
1745.0		PI/2 BPSK	-20.39	12.74	9.97	1.99	V		0.118	20.72
		QPSK	-20.40	12.73	9.97	1.99	V		0.118	20.71
		16-QAM	-20.93	12.20	9.97	1.99	V		0.104	20.18
		64-QAM	-22.85	10.28	9.97	1.99	V		0.067	18.26
		256-QAM	-24.74	8.39	9.97	1.99	V		0.043	16.37
1767.5	PI/2 BPSK	-20.16	12.95	10.02	2.10	V	0.122	20.87		
	QPSK	-20.23	12.88	10.02	2.10	V	0.120	20.80		
	16-QAM	-21.29	11.82	10.02	2.10	V	0.094	19.74		
	64-QAM	-22.85	10.26	10.02	2.10	V	0.066	18.18		
	256-QAM	-24.53	8.58	10.02	2.10	V	0.045	16.50		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1725.0	Sub6 n66/ 30 MHz [15 kHz]	PI/2 BPSK	-19.92	13.28	9.85	2.03	V	< 1.00	0.129	21.10
		QPSK	-19.93	13.27	9.85	2.03	V		0.129	21.09
		16-QAM	-20.41	12.79	9.85	2.03	V		0.115	20.61
		64-QAM	-22.36	10.84	9.85	2.03	V		0.073	18.66
		256-QAM	-24.18	9.02	9.85	2.03	V		0.048	16.84
1745.0		PI/2 BPSK	-20.49	12.64	9.97	1.99	V		0.115	20.62
		QPSK	-20.50	12.63	9.97	1.99	V		0.115	20.61
		16-QAM	-20.92	12.21	9.97	1.99	V		0.105	20.19
		64-QAM	-22.85	10.28	9.97	1.99	V		0.067	18.26
		256-QAM	-24.96	8.17	9.97	1.99	V		0.041	16.15
1765.0	PI/2 BPSK	-20.58	12.49	10.06	2.10	V	0.111	20.45		
	QPSK	-20.64	12.43	10.06	2.10	V	0.109	20.39		
	16-QAM	-21.64	11.43	10.06	2.10	V	0.087	19.39		
	64-QAM	-23.24	9.83	10.06	2.10	V	0.060	17.79		
	256-QAM	-24.96	8.11	10.06	2.10	V	0.041	16.07		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
									W	W
1730.0	Sub6 n66/ 40 MHz [15 kHz]	PI/2 BPSK	-20.15	13.09	9.88	2.01	V	< 1.00	0.125	20.96
		QPSK	-20.17	13.07	9.88	2.01	V		0.124	20.94
		16-QAM	-20.68	12.56	9.88	2.01	V		0.110	20.43
		64-QAM	-22.58	10.66	9.88	2.01	V		0.071	18.53
		256-QAM	-24.46	8.77	9.88	2.01	V		0.046	16.65
1745.0		PI/2 BPSK	-20.45	12.68	9.97	1.99	V		0.116	20.66
		QPSK	-20.53	12.60	9.97	1.99	V		0.114	20.58
		16-QAM	-20.94	12.19	9.97	1.99	V		0.104	20.17
		64-QAM	-22.87	10.26	9.97	1.99	V		0.067	18.24
		256-QAM	-24.93	8.20	9.97	1.99	V		0.042	16.18
1760.0	PI/2 BPSK	-20.53	12.28	10.04	2.07	V	0.106	20.25		
	QPSK	-20.56	12.25	10.04	2.07	V	0.105	20.22		
	16-QAM	-21.24	11.57	10.04	2.07	V	0.090	19.54		
	64-QAM	-23.17	9.64	10.04	2.07	V	0.058	17.61		
	256-QAM	-25.13	7.68	10.04	2.07	V	0.037	15.65		

8.2 RADIATED SPURIOUS EMISSIONS

- NR Band: N66
- Bandwidth: 15 MHz
- Modulation: PI/2 BPSK
- Distance: 3 meters
- SCS: 15 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
343500 (1717.5)	3 435.00	-59.89	11.30	-60.63	3.05	V	-52.38	-13.00
	5 152.50	-61.94	11.40	-57.21	3.66	V	-49.47	-13.00
	6 870.00	-61.81	11.16	-50.39	4.50	H	-43.73	-13.00
	8 587.50	-60.04	10.92	-46.24	4.87	H	-40.19	-13.00
349000 (1745.0)	3 490.00	-60.45	11.46	-61.76	3.05	V	-53.35	-13.00
	5 235.00	-61.81	11.57	-56.50	3.79	H	-48.72	-13.00
	6 980.00	-61.53	11.16	-49.30	4.51	V	-42.65	-13.00
354500 (1772.5)	3 545.00	-59.39	11.68	-61.00	3.08	H	-52.40	-13.00
	5 317.50	-62.48	11.74	-57.94	3.80	H	-50.00	-13.00
	7 090.00	-60.70	11.04	-46.58	4.46	H	-40.00	-13.00

ENDC-Mode : 12A(10 MHz)-n66A(15 MHz)

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
23095 (707.5)	1415.00	-61.01	7.61	-67.64	1.87	V	-61.89	-13.00
	2122.50	-61.78	8.98	-67.60	2.31	V	-60.93	-13.00
	2830.00	-62.30	10.52	-66.31	2.73	V	-58.52	-13.00

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Sub6 n66	5 MHz	1745.0	BPSK	25	0	4.06
			QPSK			5.26
			16-QAM			6.06
			64-QAM			6.22
			256-QAM			6.62
	10 MHz		BPSK	50		4.28
			QPSK			5.36
			16-QAM			6.09
			64-QAM			6.34
			256-QAM			6.60
	15 MHz		BPSK	75		4.20
			QPSK			5.27
			16-QAM			6.00
			64-QAM			6.22
			256-QAM			6.46
	20 MHz		BPSK	100		4.15
			QPSK			5.27
			16-QAM			5.96
			64-QAM			6.21
			256-QAM			6.50
25 MHz	BPSK	128	4.32			
	QPSK		5.32			
	16-QAM		6.08			
	64-QAM		6.32			
	256-QAM		6.40			
30 MHz	BPSK	160	4.12			
	QPSK		5.25			
	16-QAM		5.95			
	64-QAM		6.19			
	256-QAM		6.39			
40 MHz	BPSK	216	4.75			
	QPSK		5.27			
	16-QAM		6.01			
	64-QAM		6.25			
	256-QAM		6.39			

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 79 ~ 113.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Sub6 n66	5 MHz	1745.0	BPSK	25	0	4.4910
			QPSK			4.4826
			16-QAM			4.4850
			64-QAM			4.4655
			256-QAM			4.5091
	10 MHz		BPSK	50		8.9717
			QPSK			8.9678
			16-QAM			8.9921
			64-QAM			8.9823
			256-QAM			8.9604
	15 MHz		BPSK	75		13.479
			QPSK			13.500
			16-QAM			13.469
			64-QAM			13.449
			256-QAM			13.437
	20 MHz		BPSK	100		17.888
			QPSK			17.930
			16-QAM			17.942
			64-QAM			17.923
			256-QAM			17.991
	25 MHz		BPSK	128		22.902
			QPSK			22.953
			16-QAM			22.921
			64-QAM			22.909
			256-QAM			22.914
	30 MHz		BPSK	160		28.579
			QPSK			28.601
			16-QAM			28.666
64-QAM		28.582				
256-QAM		28.607				
40 MHz	BPSK	216	38.656			
	QPSK		38.573			
	16-QAM		38.688			
	64-QAM		38.586			
	256-QAM		38.674			

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 44 ~ 78.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n66	5	1712.5	8.2926	30.815	-70.315	-39.500	-13.00
		1745.0	9.6889	30.815	-70.358	-39.543	
		1777.5	9.7124	30.815	-69.662	-38.847	
	10	1715.0	8.2677	30.815	-69.892	-39.077	
		1745.0	8.8360	30.815	-69.236	-38.421	
		1775.0	8.2607	30.815	-69.790	-38.975	
	15	1717.5	9.1291	30.815	-70.308	-39.493	
		1745.0	3.8021	30.200	-69.360	-39.160	
		1772.5	9.6939	30.815	-70.063	-39.248	
	20	1720.0	3.8191	30.200	-70.093	-39.893	
		1745.0	8.2323	30.815	-69.952	-39.137	
		1770.0	9.6979	30.815	-69.910	-39.095	
	25	1722.5	8.8799	30.815	-70.484	-39.669	
		1745.0	4.9382	30.200	-69.889	-39.689	
		1767.5	8.0349	30.815	-69.898	-39.083	
	30	1725.0	4.0409	30.200	-69.602	-39.402	
		1745.0	5.4507	30.815	-69.761	-38.946	
		1765.0	5.1905	30.815	-70.399	-39.584	
	40	1730.0	6.0329	30.200	-69.201	-39.001	
		1745.0	9.7159	30.815	-69.438	-38.623	
		1760.0	3.7827	30.815	-69.353	-38.538	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 156 ~ 197.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20	32.355

8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 114 ~ 155.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ BandWidth: 5 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
1712.5	100 %	+20(Ref)	1712 500 008	0.0	0.000 000	0.000
	100 %	-30	1712 500 017	8.7	0.000 001	0.005
	100 %	-20	1712 500 015	7.5	0.000 000	0.004
	100 %	-10	1712 500 024	15.9	0.000 001	0.009
	100 %	0	1712 500 020	11.9	0.000 001	0.007
	100 %	+10	1712 500 023	14.7	0.000 001	0.009
	100 %	+30	1712 500 013	5.1	0.000 000	0.003
	100 %	+40	1712 500 013	5.2	0.000 000	0.003
	100 %	+50	1712 500 020	11.7	0.000 001	0.007
	Batt. Endpoint	+20	1712 500 015	6.8	0.000 000	0.004
1777.5	100 %	+20(Ref)	1777 500 006	0.0	0.000 000	0.000
	100 %	-30	1777 500 011	4.9	0.000 000	0.003
	100 %	-20	1777 500 014	8.3	0.000 000	0.005
	100 %	-10	1777 500 015	8.5	0.000 000	0.005
	100 %	0	1777 500 014	8.2	0.000 000	0.005
	100 %	+10	1777 500 010	4.2	0.000 000	0.002
	100 %	+30	1777 500 013	7.3	0.000 000	0.004
	100 %	+40	1777 500 011	5.2	0.000 000	0.003
	100 %	+50	1777 500 018	12.2	0.000 001	0.007
	Batt. Endpoint	+20	1777 500 019	13.1	0.000 001	0.007

- ▣ BandWidth: 10 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
1715.0	100 %	+20(Ref)	1715 000 007	0.0	0.000 000	0.000
	100 %	-30	1715 000 015	7.4	0.000 000	0.004
	100 %	-20	1715 000 011	3.8	0.000 000	0.002
	100 %	-10	1715 000 021	14.0	0.000 001	0.008
	100 %	0	1715 000 017	9.7	0.000 001	0.006
	100 %	+10	1715 000 011	4.0	0.000 000	0.002
	100 %	+30	1715 000 024	16.9	0.000 001	0.010
	100 %	+40	1715 000 018	11.0	0.000 001	0.006
	100 %	+50	1715 000 024	16.6	0.000 001	0.010
	Batt. Endpoint	+20	1715 000 016	8.6	0.000 001	0.005
1775.0	100 %	+20(Ref)	1775 000 012	0.0	0.000 000	0.000
	100 %	-30	1775 000 025	12.9	0.000 001	0.007
	100 %	-20	1775 000 027	15.8	0.000 001	0.009
	100 %	-10	1775 000 018	6.0	0.000 000	0.003
	100 %	0	1775 000 026	14.5	0.000 001	0.008
	100 %	+10	1775 000 017	5.7	0.000 000	0.003
	100 %	+30	1775 000 027	15.2	0.000 001	0.009
	100 %	+40	1775 000 027	15.2	0.000 001	0.009
	100 %	+50	1775 000 015	3.6	0.000 000	0.002
	Batt. Endpoint	+20	1775 000 026	14.4	0.000 001	0.008

- ▣ BandWidth: 15 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
1717.5	100 %	+20(Ref)	1717 500 014	0.0	0.000 000	0.000
	100 %	-30	1717 500 019	5.2	0.000 000	0.003
	100 %	-20	1717 500 025	11.2	0.000 001	0.006
	100 %	-10	1717 500 030	16.8	0.000 001	0.010
	100 %	0	1717 500 028	14.7	0.000 001	0.009
	100 %	+10	1717 500 023	9.0	0.000 001	0.005
	100 %	+30	1717 500 027	13.6	0.000 001	0.008
	100 %	+40	1717 500 020	6.3	0.000 000	0.004
	100 %	+50	1717 500 024	10.0	0.000 001	0.006
	Batt. Endpoint	+20	1717 500 028	14.3	0.000 001	0.008
1772.5	100 %	+20(Ref)	1772 500 010	0.0	0.000 000	0.000
	100 %	-30	1772 500 017	6.8	0.000 000	0.004
	100 %	-20	1772 500 022	12.1	0.000 001	0.007
	100 %	-10	1772 500 016	6.3	0.000 000	0.004
	100 %	0	1772 500 023	13.1	0.000 001	0.007
	100 %	+10	1772 500 025	14.7	0.000 001	0.008
	100 %	+30	1772 500 017	7.3	0.000 000	0.004
	100 %	+40	1772 500 018	7.5	0.000 000	0.004
	100 %	+50	1772 500 027	16.8	0.000 001	0.009
	Batt. Endpoint	+20	1772 500 018	8.0	0.000 000	0.004

- ▣ BandWidth: 20 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
1720.0	100 %	+20(Ref)	1720 000 005	0.0	0.000 000	0.000
	100 %	-30	1720 000 018	12.8	0.000 001	0.007
	100 %	-20	1720 000 022	16.7	0.000 001	0.010
	100 %	-10	1720 000 017	11.5	0.000 001	0.007
	100 %	0	1720 000 020	14.5	0.000 001	0.008
	100 %	+10	1720 000 020	15.1	0.000 001	0.009
	100 %	+30	1720 000 012	6.5	0.000 000	0.004
	100 %	+40	1720 000 013	7.5	0.000 000	0.004
	100 %	+50	1720 000 017	11.6	0.000 001	0.007
	Batt. Endpoint	+20	1720 000 011	6.0	0.000 000	0.003
1770.0	100 %	+20(Ref)	1770 000 011	0.0	0.000 000	0.000
	100 %	-30	1770 000 028	16.8	0.000 001	0.010
	100 %	-20	1770 000 018	6.8	0.000 000	0.004
	100 %	-10	1770 000 017	6.5	0.000 000	0.004
	100 %	0	1770 000 021	9.9	0.000 001	0.006
	100 %	+10	1770 000 025	14.2	0.000 001	0.008
	100 %	+30	1770 000 023	12.0	0.000 001	0.007
	100 %	+40	1770 000 023	12.6	0.000 001	0.007
	100 %	+50	1770 000 024	13.0	0.000 001	0.007
	Batt. Endpoint	+20	1770 000 014	3.0	0.000 000	0.002

- ▣ BandWidth: 25 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
1722.5	100 %	+20(Ref)	1720 000 016	0.0	0.000 000	0.000
	100 %	-30	1720 000 025	8.9	0.000 001	0.005
	100 %	-20	1720 000 023	7.2	0.000 000	0.004
	100 %	-10	1720 000 027	10.6	0.000 001	0.006
	100 %	0	1720 000 023	6.6	0.000 000	0.004
	100 %	+10	1720 000 020	3.5	0.000 000	0.002
	100 %	+30	1720 000 028	12.2	0.000 001	0.007
	100 %	+40	1720 000 024	7.6	0.000 000	0.004
	100 %	+50	1720 000 020	4.2	0.000 000	0.002
	Batt. Endpoint	+20	1720 000 032	15.6	0.000 001	0.009
1767.5	100 %	+20(Ref)	1767 500 011	0.0	0.000 000	0.000
	100 %	-30	1767 500 027	16.2	0.000 001	0.009
	100 %	-20	1767 500 021	10.5	0.000 001	0.006
	100 %	-10	1767 500 020	9.7	0.000 001	0.006
	100 %	0	1767 500 021	10.1	0.000 001	0.006
	100 %	+10	1767 500 016	5.8	0.000 000	0.003
	100 %	+30	1767 500 015	4.5	0.000 000	0.003
	100 %	+40	1767 500 027	16.6	0.000 001	0.009
	100 %	+50	1767 500 021	10.2	0.000 001	0.006
	Batt. Endpoint	+20	1767 500 018	7.8	0.000 000	0.004

- ▣ BandWidth: 30 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
1725.0	100 %	+20(Ref)	1725 000 010	0.0	0.000 000	0.000
	100 %	-30	1725 000 023	13.6	0.000 001	0.008
	100 %	-20	1725 000 023	13.4	0.000 001	0.008
	100 %	-10	1725 000 016	6.0	0.000 000	0.003
	100 %	0	1725 000 016	6.8	0.000 000	0.004
	100 %	+10	1725 000 025	15.5	0.000 001	0.009
	100 %	+30	1725 000 021	11.5	0.000 001	0.007
	100 %	+40	1725 000 017	7.3	0.000 000	0.004
	100 %	+50	1725 000 018	8.1	0.000 000	0.005
	Batt. Endpoint	+20	1725 000 015	5.5	0.000 000	0.003
1765.0	100 %	+20(Ref)	1765 000 016	0.0	0.000 000	0.000
	100 %	-30	1765 000 033	16.6	0.000 001	0.009
	100 %	-20	1765 000 028	11.5	0.000 001	0.007
	100 %	-10	1765 000 031	14.9	0.000 001	0.008
	100 %	0	1765 000 022	6.1	0.000 000	0.003
	100 %	+10	1765 000 029	12.7	0.000 001	0.007
	100 %	+30	1765 000 025	9.0	0.000 001	0.005
	100 %	+40	1765 000 028	11.4	0.000 001	0.006
	100 %	+50	1765 000 033	16.6	0.000 001	0.009
	Batt. Endpoint	+20	1765 000 029	12.3	0.000 001	0.007

- ▣ BandWidth: 40 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
1730.0	100 %	+20(Ref)	1730 000 008	0.0	0.000 000	0.000
	100 %	-30	1730 000 023	15.4	0.000 001	0.009
	100 %	-20	1730 000 013	4.5	0.000 000	0.003
	100 %	-10	1730 000 020	12.3	0.000 001	0.007
	100 %	0	1730 000 024	15.5	0.000 001	0.009
	100 %	+10	1730 000 014	6.4	0.000 000	0.004
	100 %	+30	1730 000 018	9.5	0.000 001	0.006
	100 %	+40	1730 000 017	9.2	0.000 001	0.005
	100 %	+50	1730 000 020	12.3	0.000 001	0.007
	Batt. Endpoint	+20	1730 000 020	11.7	0.000 001	0.007
1760.0	100 %	+20(Ref)	1760 000 004	0.0	0.000 000	0.000
	100 %	-30	1760 000 015	10.3	0.000 001	0.006
	100 %	-20	1760 000 013	9.0	0.000 001	0.005
	100 %	-10	1760 000 013	8.1	0.000 000	0.005
	100 %	0	1760 000 019	14.1	0.000 001	0.008
	100 %	+10	1760 000 018	13.5	0.000 001	0.008
	100 %	+30	1760 000 018	13.3	0.000 001	0.008
	100 %	+40	1760 000 020	15.9	0.000 001	0.009
	100 %	+50	1760 000 010	6.0	0.000 000	0.003
	Batt. Endpoint	+20	1760 000 014	9.2	0.000 001	0.005

9. TEST PLOTS


Sub6 n66. Occupied Bandwidth Plot (5 M BW Ch.349000 BPSK Full RB)



Sub6 n66. Occupied Bandwidth Plot (5 M BW Ch.349000 QPSK Full RB)



Sub6 n66. Occupied Bandwidth Plot (5 M BW Ch.349000 16QAM Full RB)

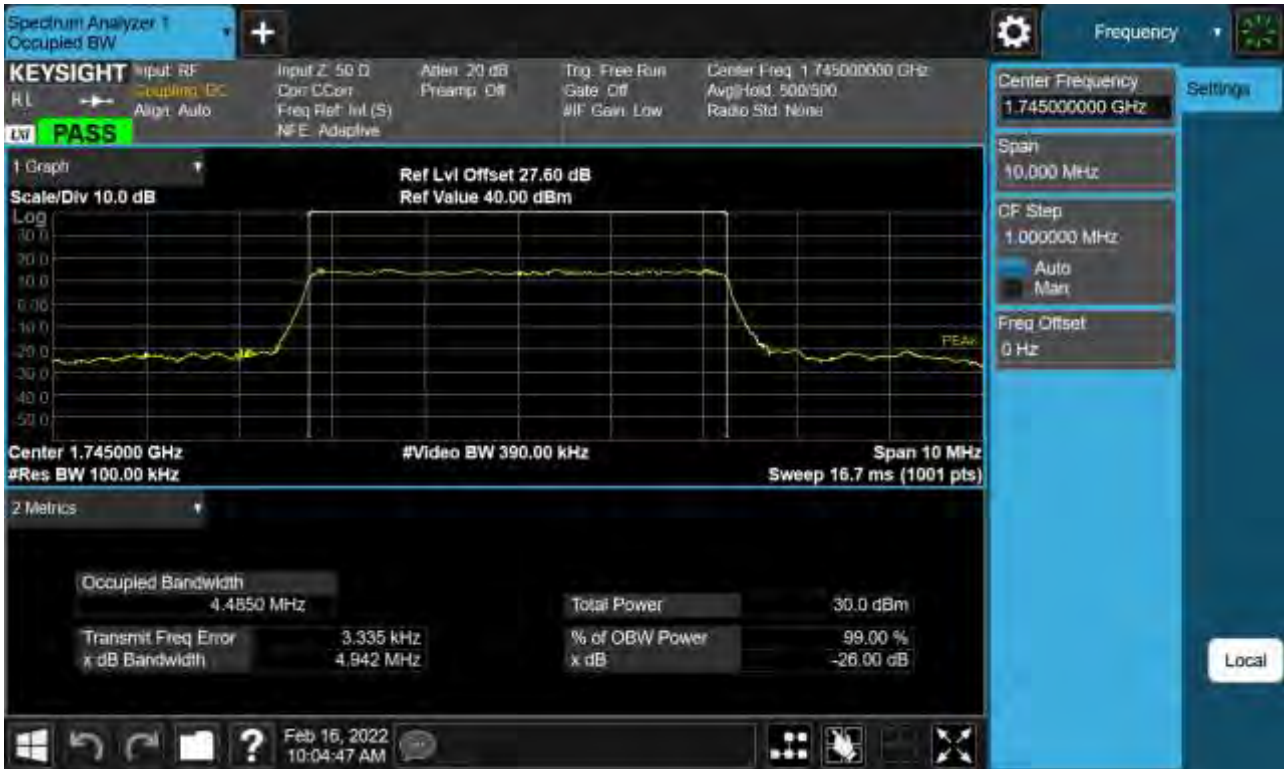

Sub6 n66. Occupied Bandwidth Plot (5 M BW Ch.349000 64QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (5 M BW Ch.349000 256QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (10 M BW Ch.349000 BPSK Full RB)



Sub6 n66. Occupied Bandwidth Plot (10 M BW Ch.349000 QPSK Full RB)



Sub6 n66. Occupied Bandwidth Plot (10 M BW Ch.349000 16QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (10 M BW Ch.349000 64QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (10 M BW Ch.349000 256QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (15 M BW Ch.349000 BPSK Full RB)



Sub6 n66. Occupied Bandwidth Plot (15 M BW Ch.349000 QPSK Full RB)



Sub6 n66. Occupied Bandwidth Plot (15 M BW Ch.349000 16QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (15 M BW Ch.349000 64QAM Full RB)




Sub6 n66. Occupied Bandwidth Plot (15 M BW Ch.349000 256QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (20 M BW Ch.349000 BPSK Full RB)



Sub6 n66. Occupied Bandwidth Plot (20 M BW Ch.349000 QPSK Full RB)

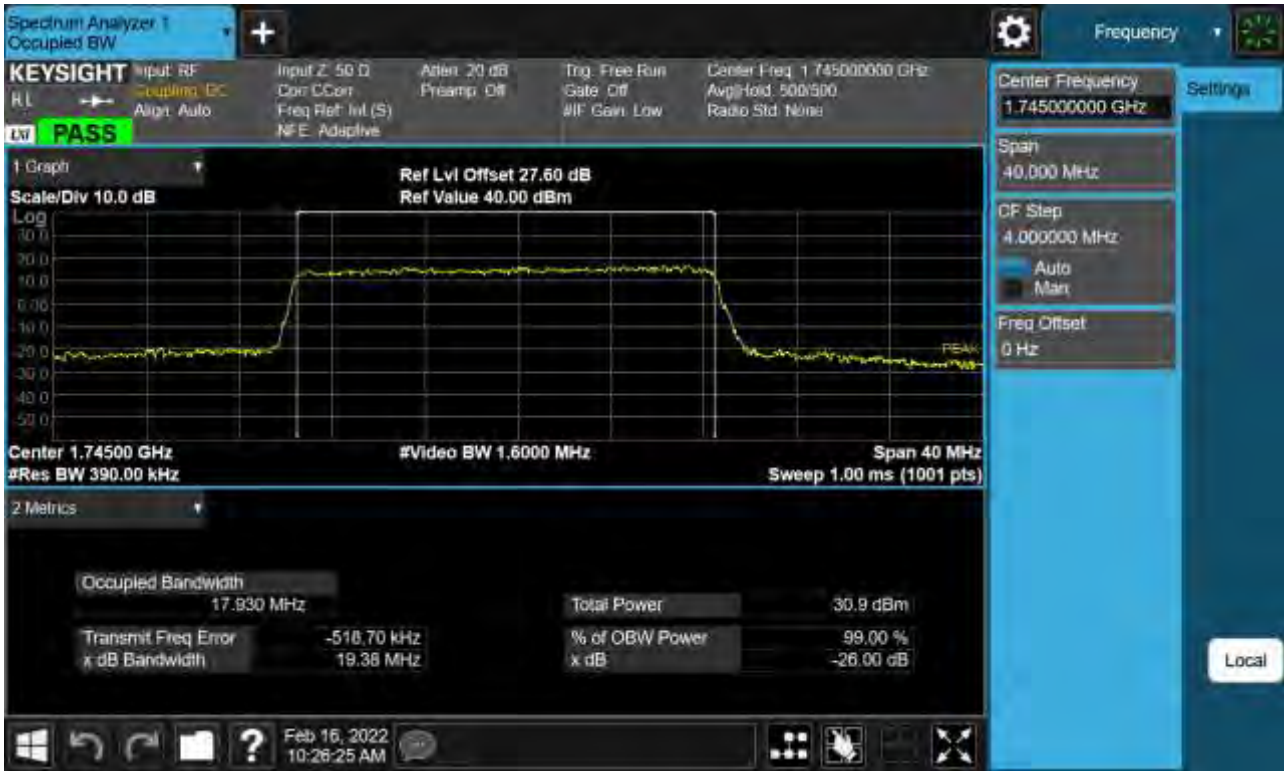

Sub6 n66. Occupied Bandwidth Plot (20 M BW Ch.349000 16QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (20 M BW Ch.349000 64QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (20 M BW Ch.349000 256QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (25 M BW Ch.349000 BPSK Full RB)



Sub6 n66. Occupied Bandwidth Plot (25 M BW Ch.349000 QPSK Full RB)



Sub6 n66. Occupied Bandwidth Plot (25 M BW Ch.349000 16QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (25 M BW Ch.349000 64QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (25 M BW Ch.349000 256QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (30 M BW Ch.349000 BPSK Full RB)



Sub6 n66. Occupied Bandwidth Plot (30 M BW Ch.349000 QPSK Full RB)



Sub6 n66. Occupied Bandwidth Plot (30 M BW Ch.349000 16QAM Full RB)




Sub6 n66. Occupied Bandwidth Plot (30 M BW Ch.349000 64QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (30 M BW Ch.349000 256QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (40 M BW Ch.349000 BPSK Full RB)

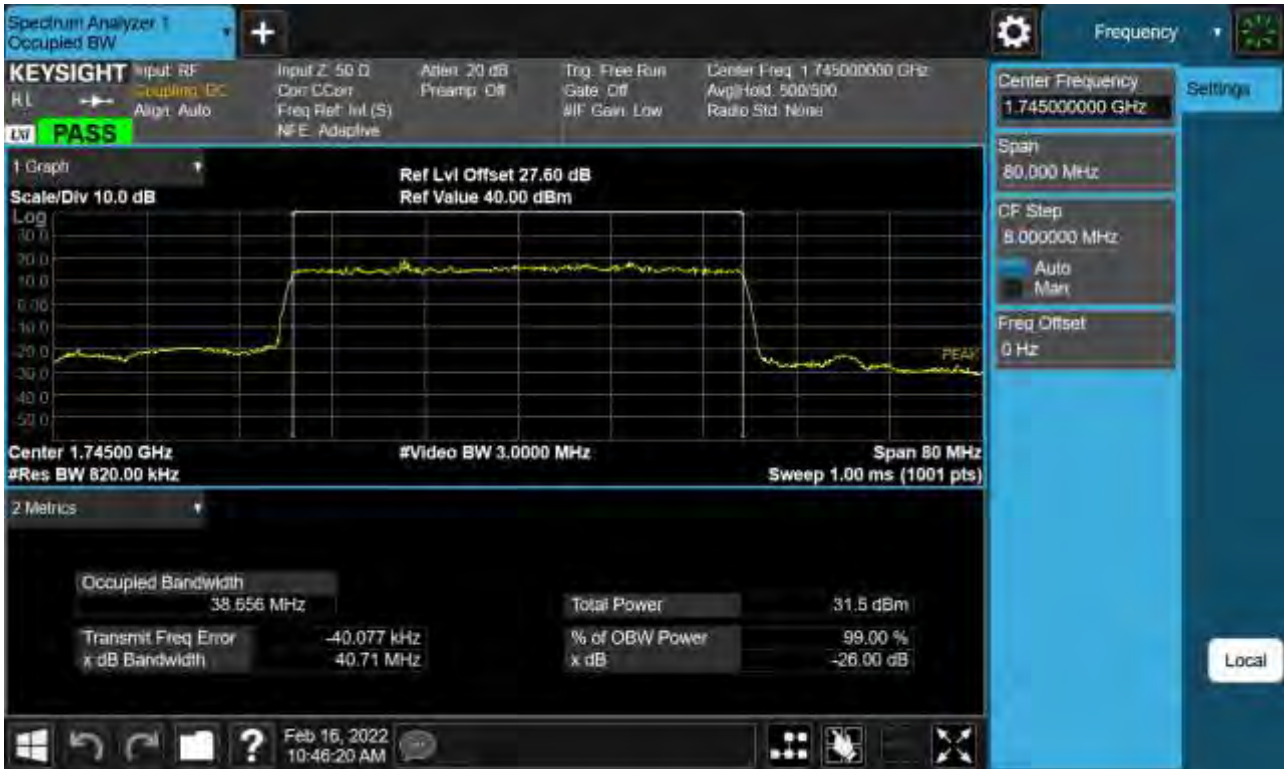


Sub6 n66. Occupied Bandwidth Plot (40 M BW Ch.349000 QPSK Full RB)



Sub6 n66. Occupied Bandwidth Plot (40 M BW Ch.349000 16QAM Full RB)



Sub6 n66. Occupied Bandwidth Plot (40 M BW Ch.349000 64QAM Full RB)

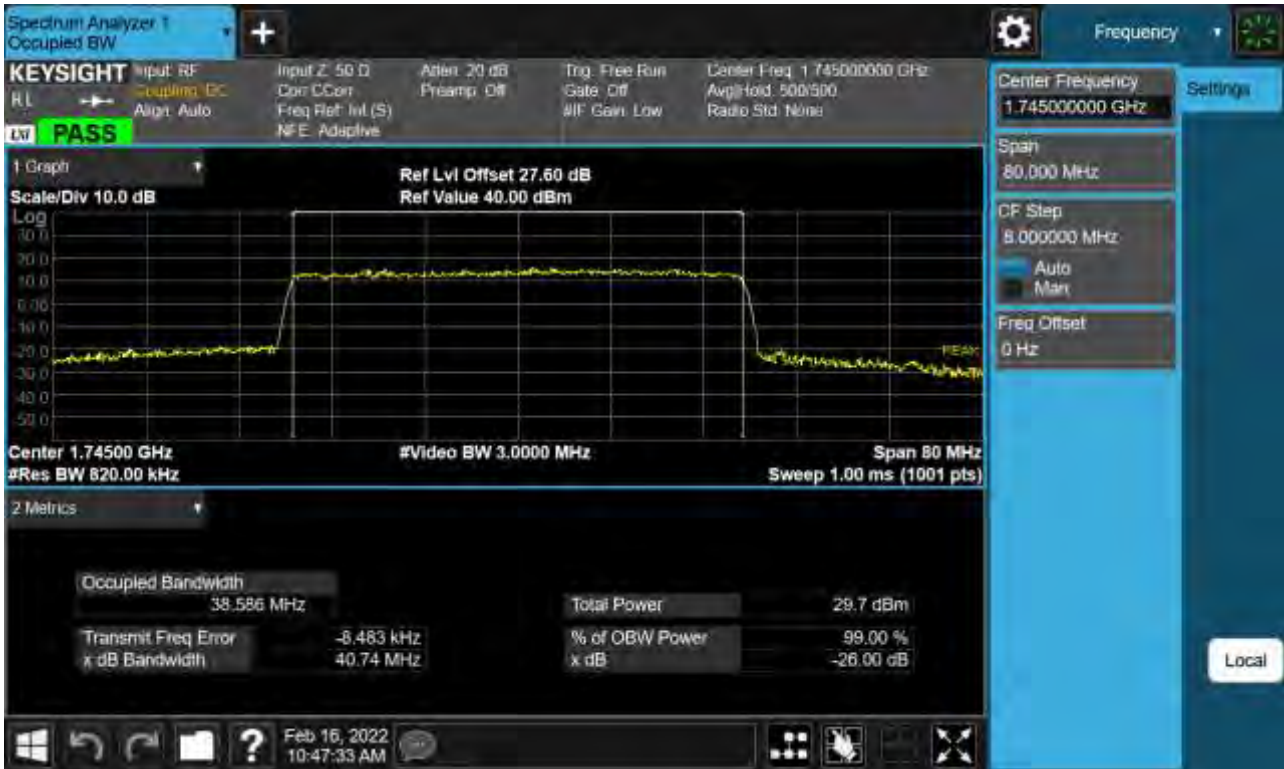

Sub6 n66. Occupied Bandwidth Plot (40 M BW Ch.349000 256QAM Full RB)



Sub6 n66. PAR Plot (5 M BW_Ch.349000_ BPSK_ Full RB)




Sub6 n66. PAR Plot (5 M BW_Ch.349000_QPSK_Full RB)



Sub6 n66. PAR Plot (5 M BW_Ch.349000_16QAM_Full RB)



Sub6 n66. PAR Plot (5 M BW_Ch.349000_64QAM_Full RB)

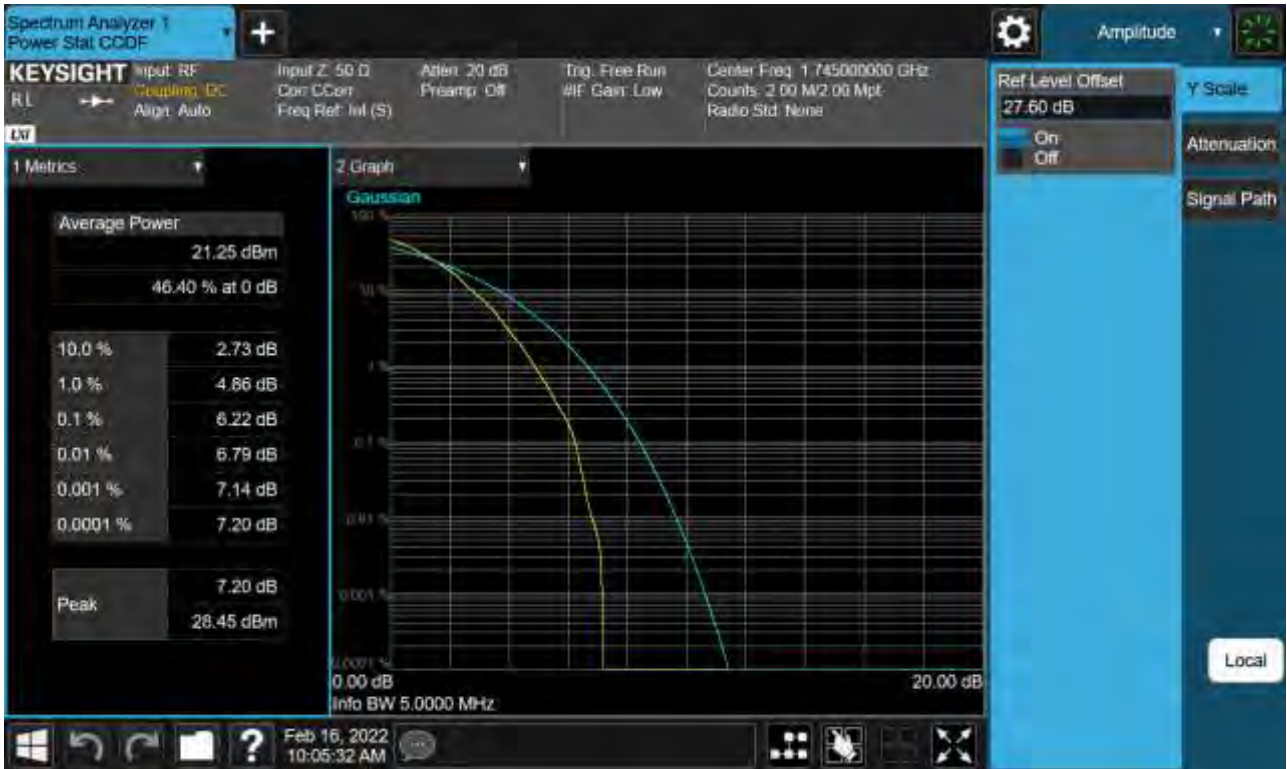

Sub6 n66. PAR Plot (5 M BW_Ch.349000_256QAM_Full RB)



Sub6 n66. PAR Plot (10 M BW_Ch.349000_ BPSK_ Full RB)



Sub6 n66. PAR Plot (10 M BW_Ch.349000_QPSK_Full RB)



Sub6 n66. PAR Plot (10 M BW_Ch.349000_16QAM_Full RB)



Sub6 n66. PAR Plot (10 M BW_Ch.349000_64QAM_Full RB)



Sub6 n66. PAR Plot (10 M BW_Ch.349000_256QAM_Full RB)



Sub6 n66. PAR Plot (15 M BW_Ch.349000_ BPSK_ Full RB)




Sub6 n66. PAR Plot (15 M BW_Ch.349000_QPSK_Full RB)




Sub6 n66. PAR Plot (15 M BW_Ch.349000_16QAM_Full RB)




Sub6 n66. PAR Plot (15 M BW_Ch.349000_64QAM_Full RB)

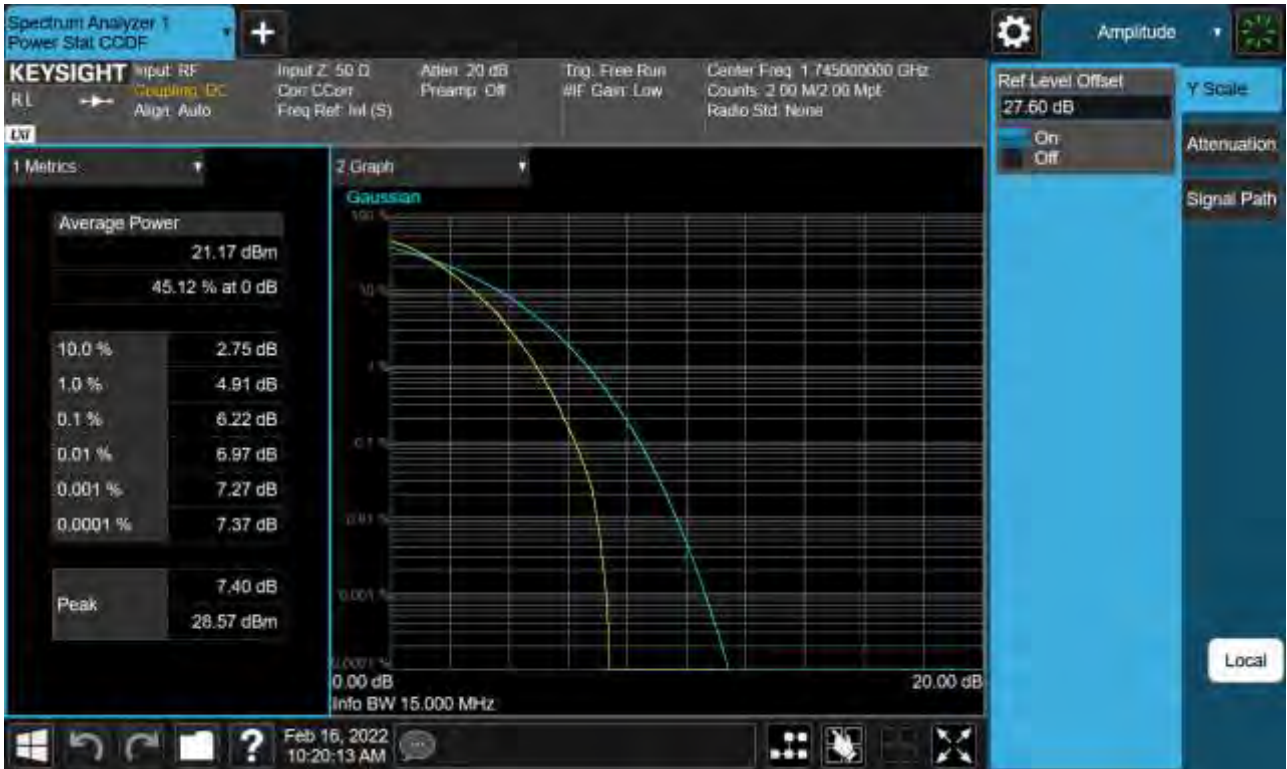


Sub6 n66. PAR Plot (15 M BW_Ch.349000_256QAM_Full RB)

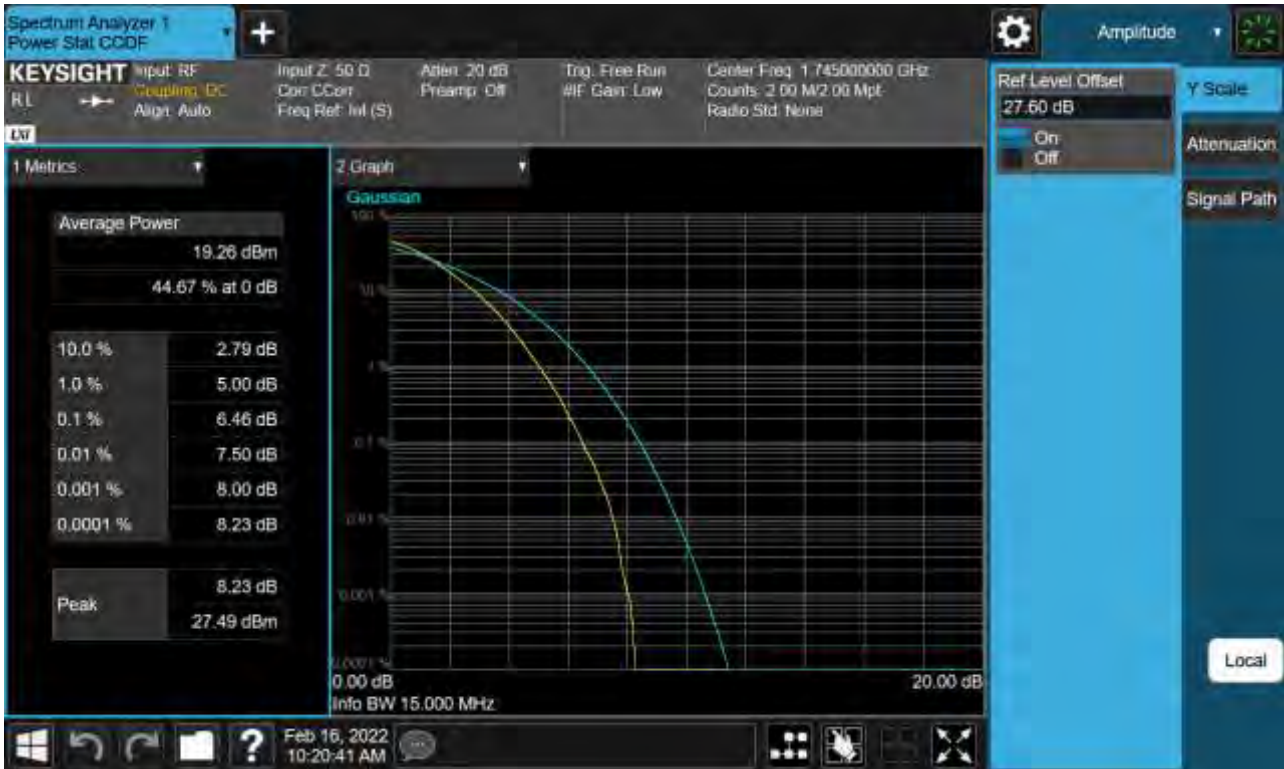


Sub6 n66. PAR Plot (20 M BW_Ch.349000_ BPSK_ Full RB)

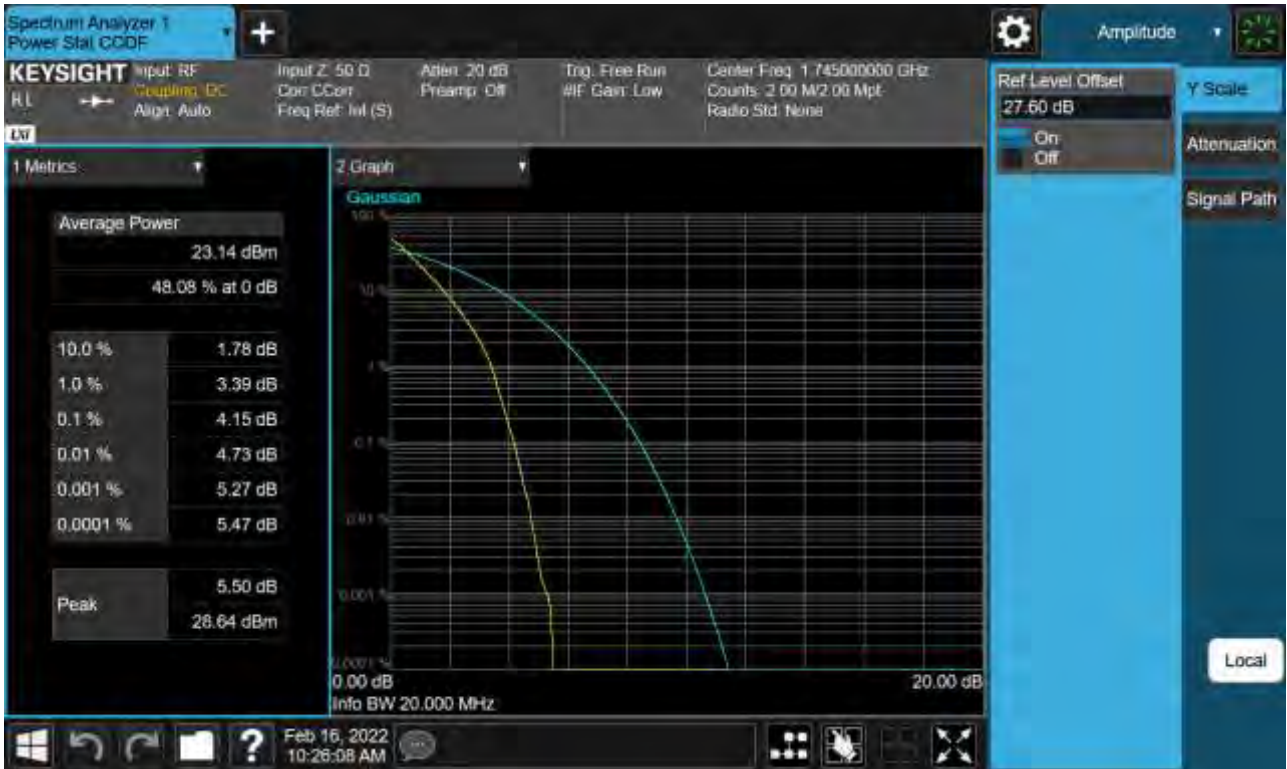

Sub6 n66. PAR Plot (20 M BW_Ch.349000_QPSK_Full RB)

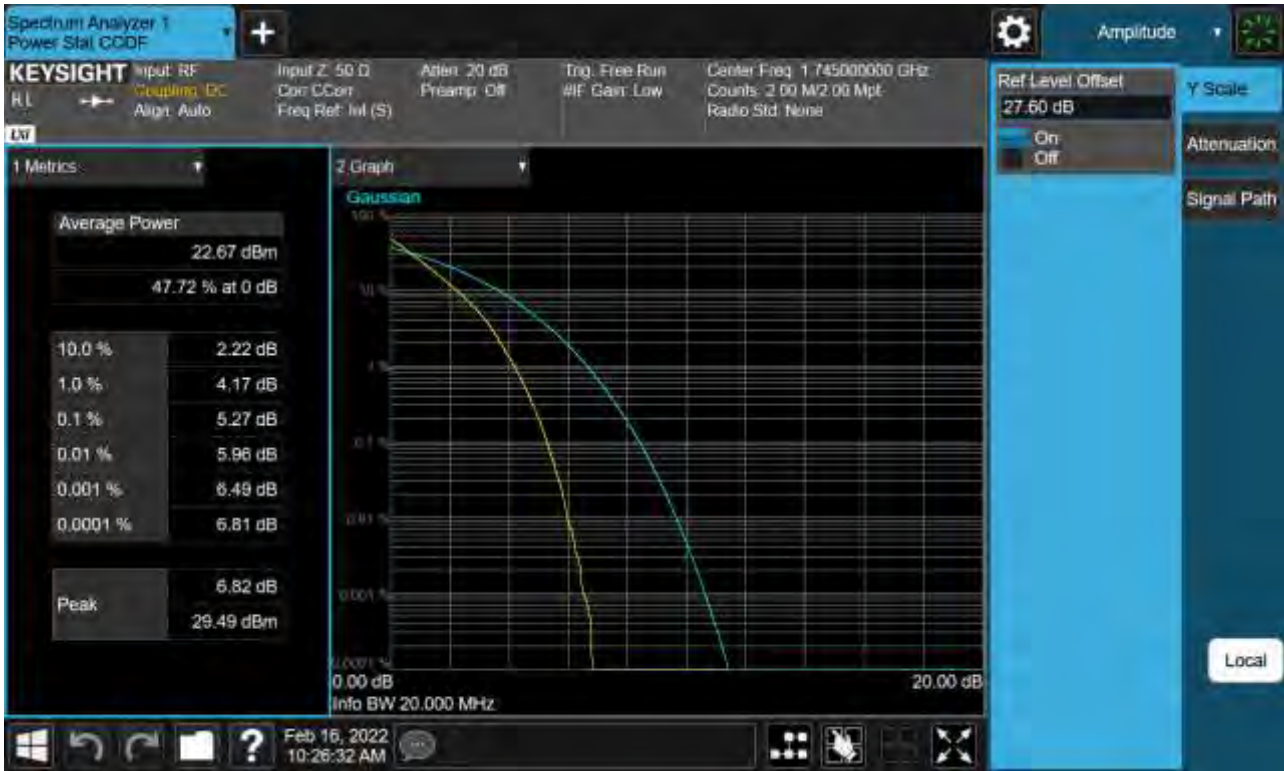

Sub6 n66. PAR Plot (20 M BW_Ch.349000_16QAM_Full RB)

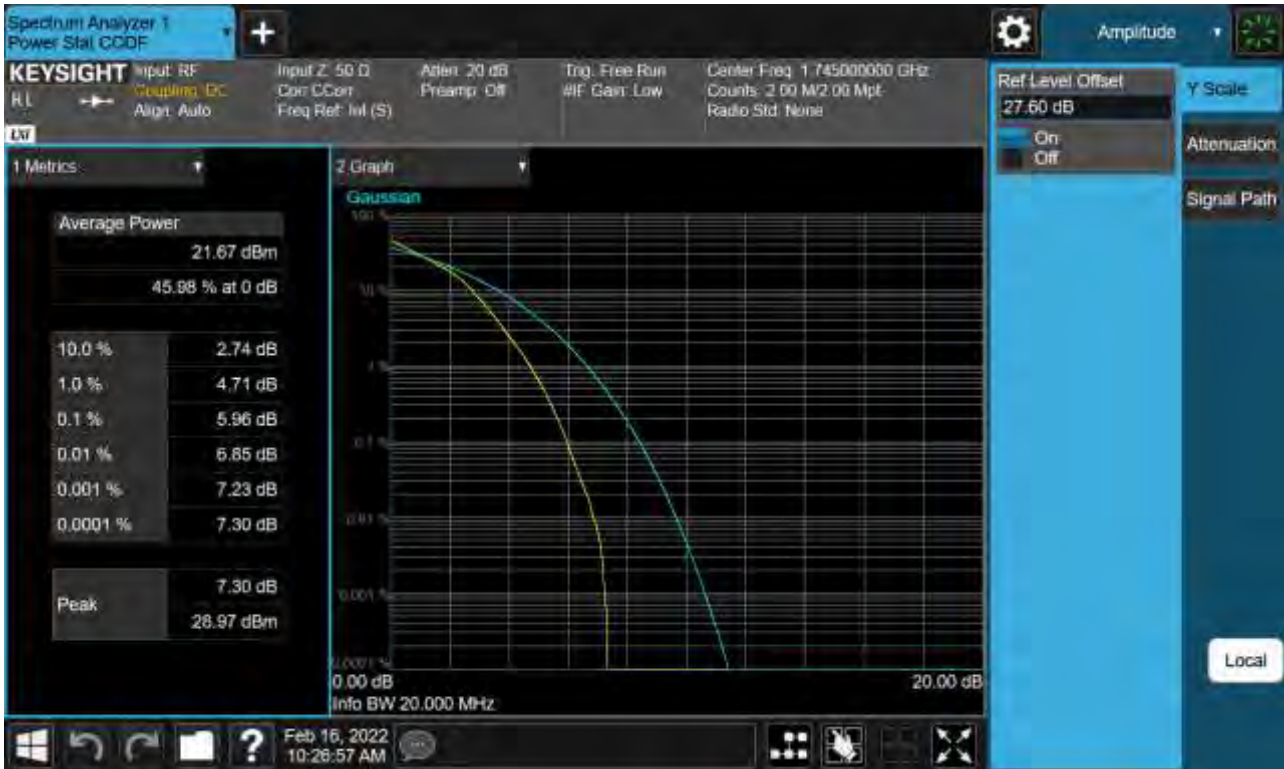

Sub6 n66. PAR Plot (20 M BW_Ch.349000_64QAM_Full RB)




Sub6 n66. PAR Plot (20 M BW_Ch.349000_256QAM_Full RB)




Sub6 n66. PAR Plot (25 M BW_Ch.349000_ BPSK_ Full RB)



Sub6 n66. PAR Plot (25 M BW_Ch.349000_QPSK_Full RB)

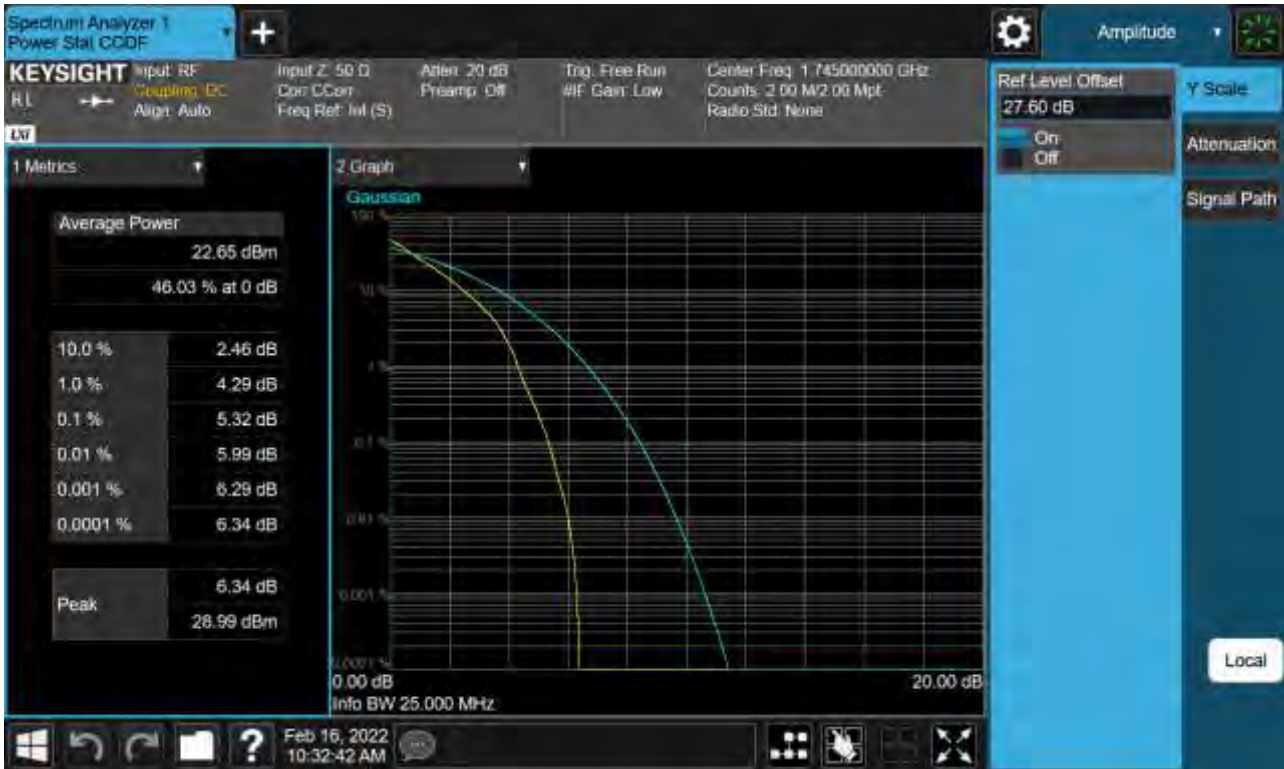

Sub6 n66. PAR Plot (25 M BW_Ch.349000_16QAM_Full RB)

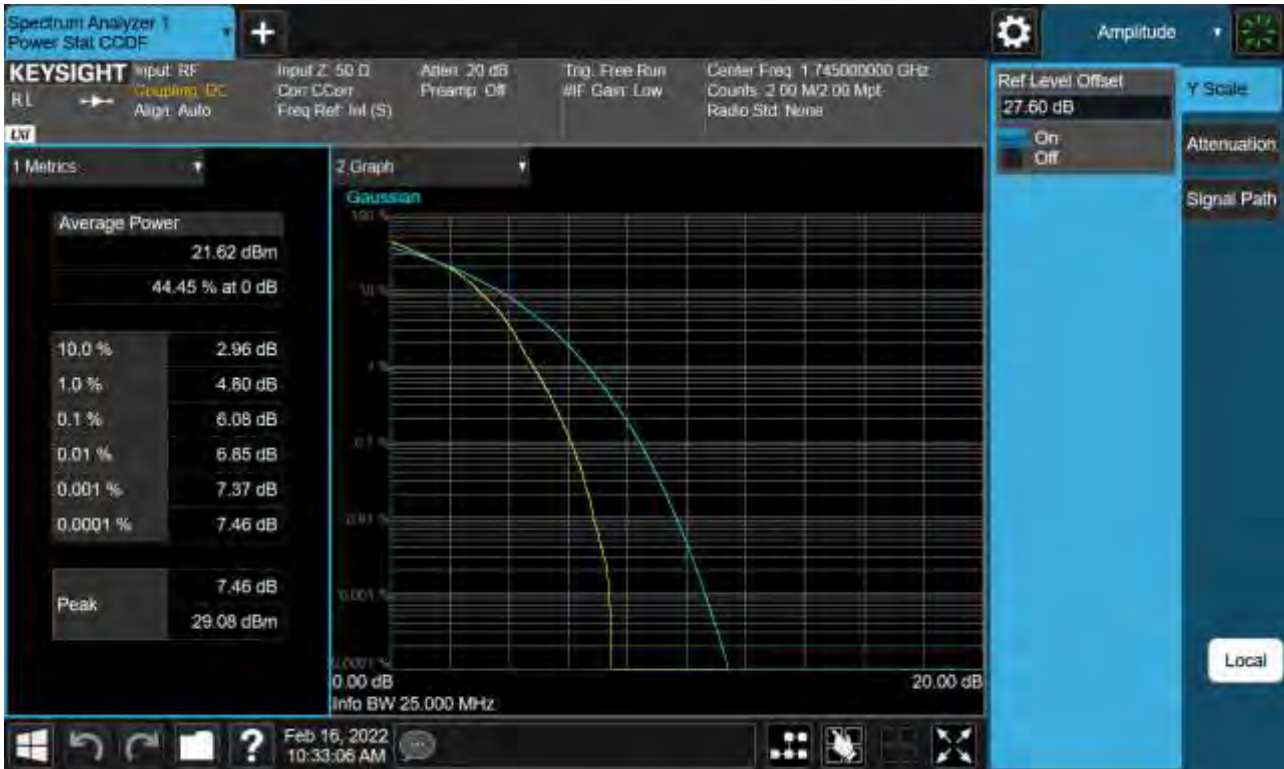

Sub6 n66. PAR Plot (25 M BW_Ch.349000_64QAM_Full RB)



Sub6 n66. PAR Plot (25 M BW_Ch.349000_256QAM_Full RB)



Sub6 n66. PAR Plot (30 M BW_Ch.349000_ BPSK_ Full RB)




Sub6 n66. PAR Plot (30 M BW_Ch.349000_QPSK_Full RB)



Sub6 n66. PAR Plot (30 M BW_Ch.349000_16QAM_Full RB)



Sub6 n66. PAR Plot (30 M BW_Ch.349000_64QAM_Full RB)

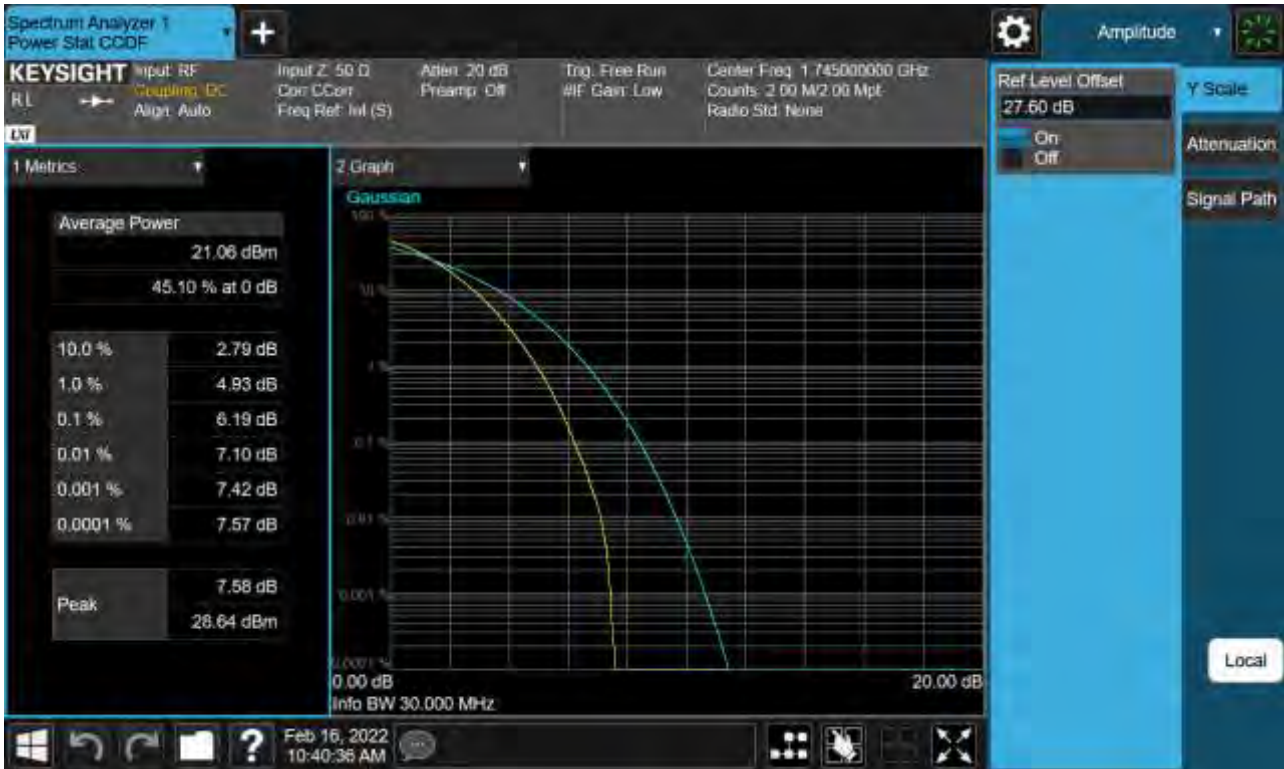


Sub6 n66. PAR Plot (30 M BW_Ch.349000_256QAM_Full RB)




Sub6 n66. PAR Plot (40 M BW_Ch.349000_ BPSK_ Full RB)



Sub6 n66. PAR Plot (40 M BW_Ch.349000_QPSK_Full RB)

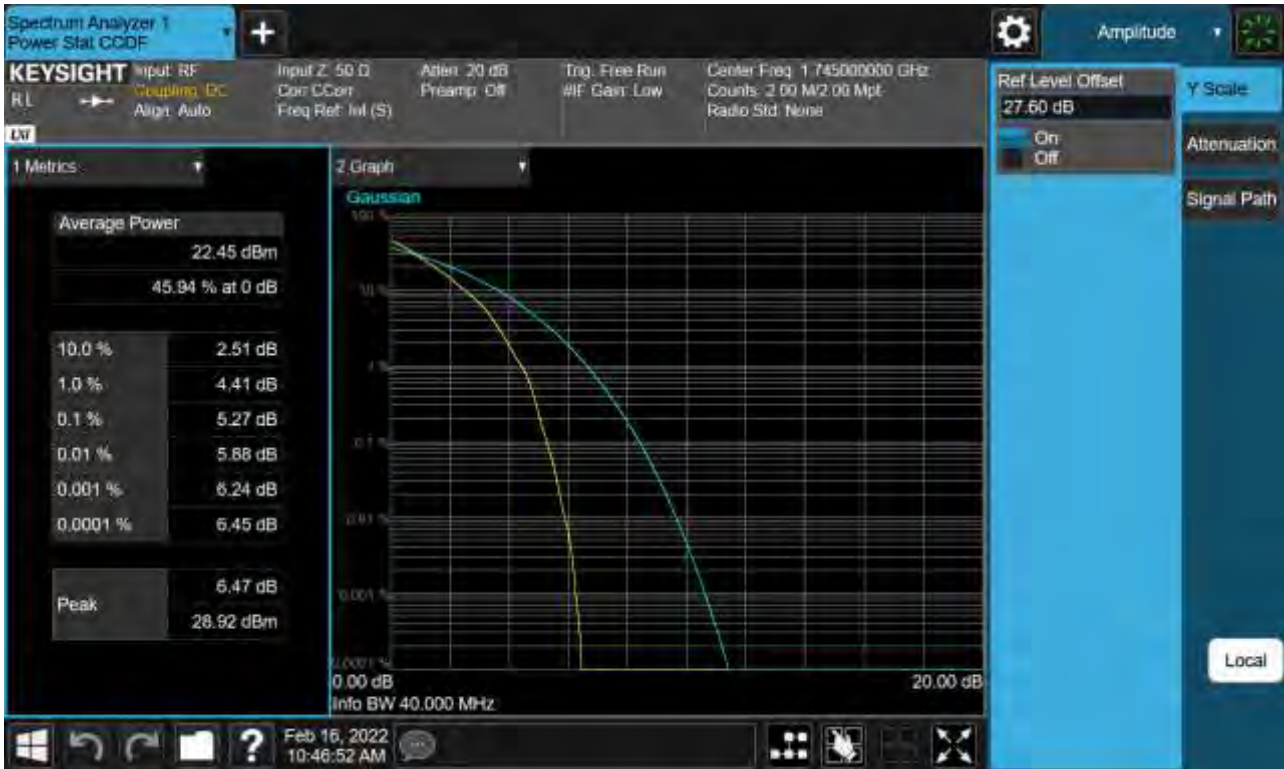


Sub6 n66. PAR Plot (40 M BW_Ch.349000_16QAM_Full RB)

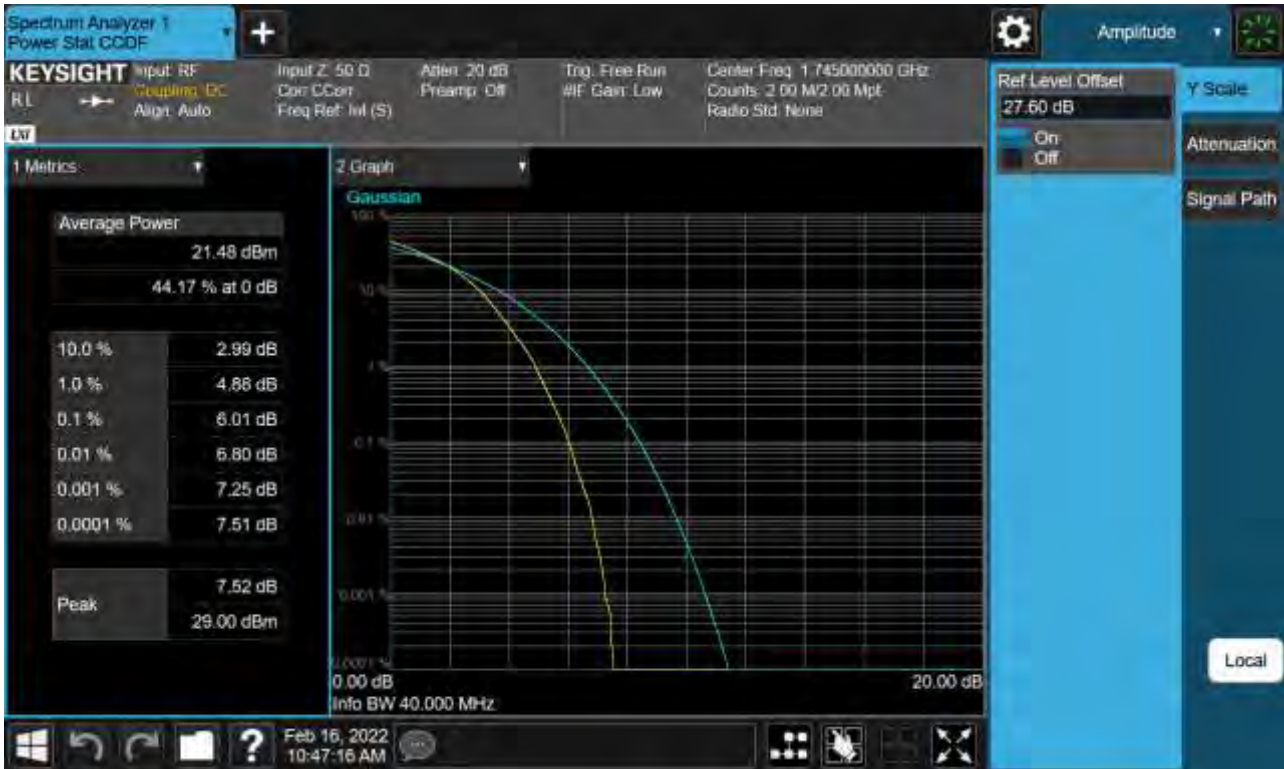


Sub6 n66. PAR Plot (40 M BW_Ch.349000_64QAM_Full RB)



Sub6 n66. PAR Plot (40 M BW_Ch.349000_256QAM_Full RB)

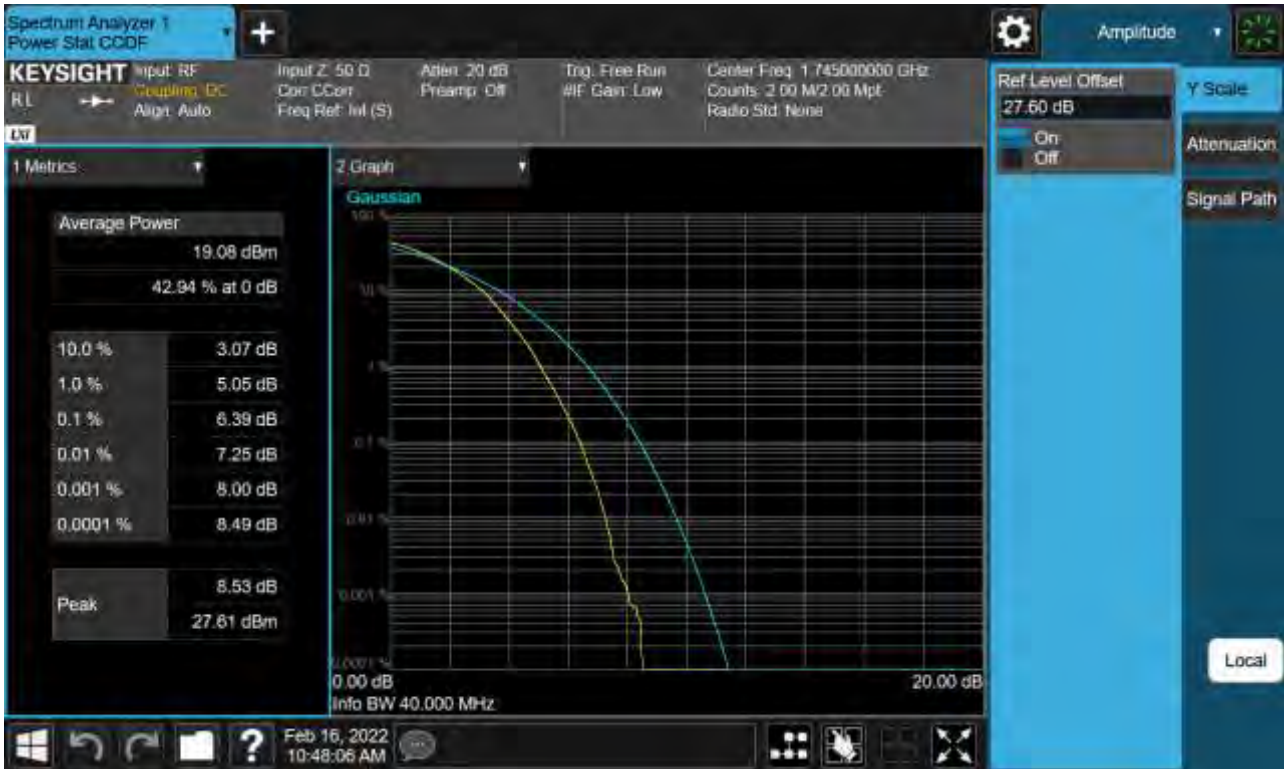


Sub6 n66. Lower Band Edge Plot (5 M BW Ch.342500 BPSK RB 1, Offset 0) -1

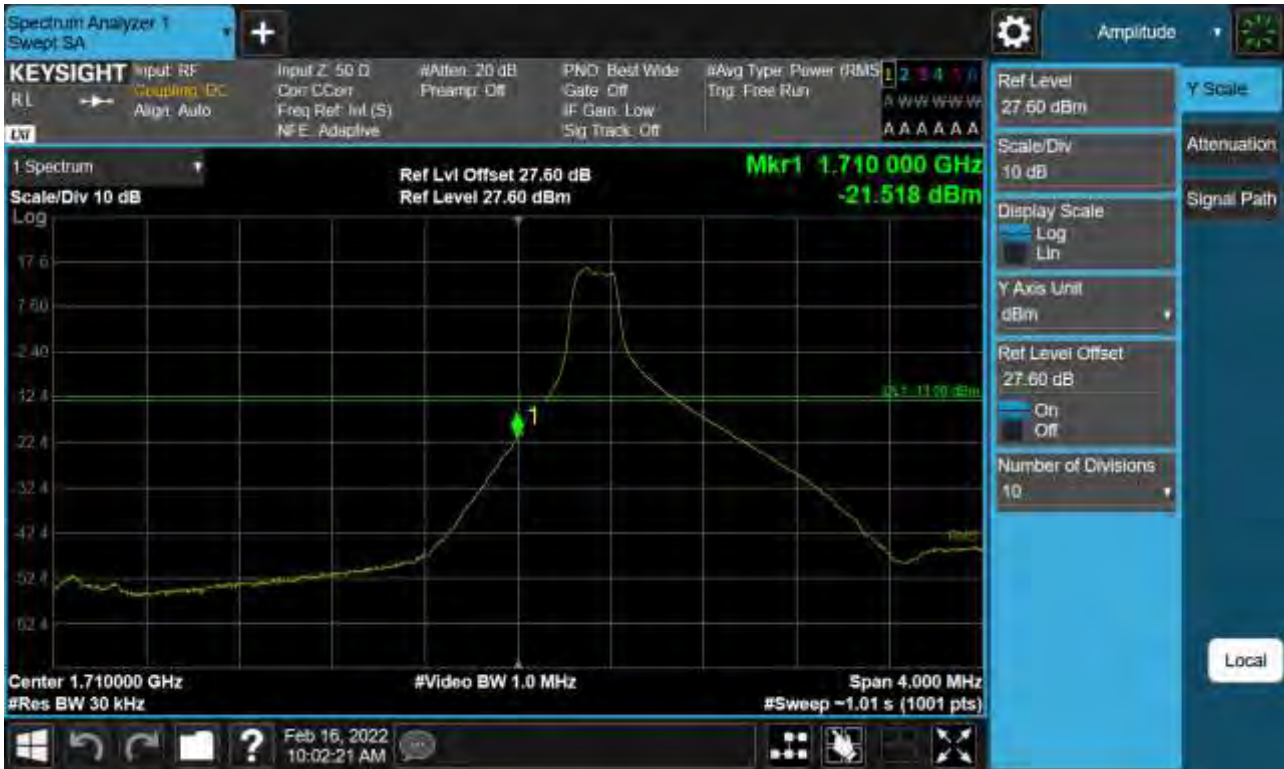

Sub6 n66. Lower Band Edge Plot (5 M BW Ch.342500 BPSK Full RB) -2



Sub6 n66. Lower Extended Band Edge Plot (5 M BW Ch.342500 BPSK_ Full RB) -3

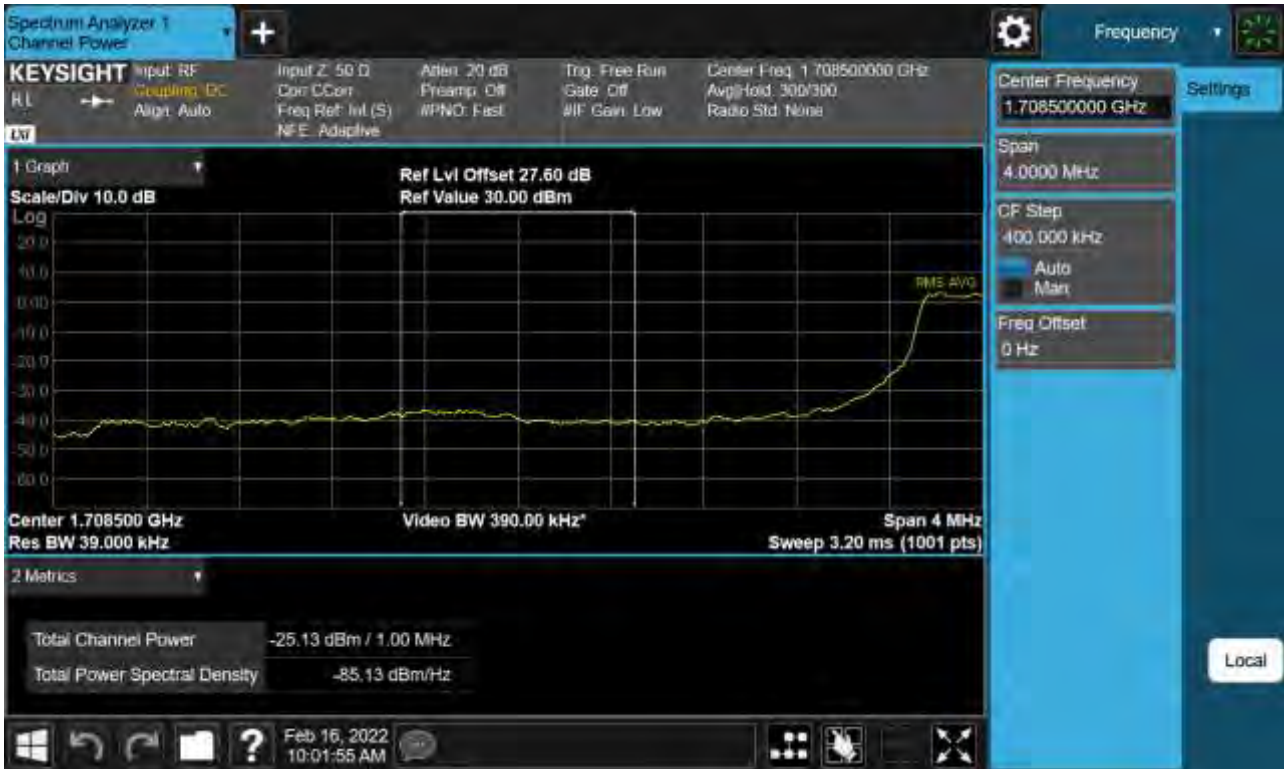


Sub6 n66. Lower Band Edge Plot (10 M BW Ch.343000 BPSK RB 1, Offset 0) -1



Sub6 n66. Lower Band Edge Plot (10 M BW Ch.343000 BPSK Full RB) -2



Sub6 n66. Lower Extended Band Edge Plot (10 M BW Ch.343000 BPSK_ Full RB) -3

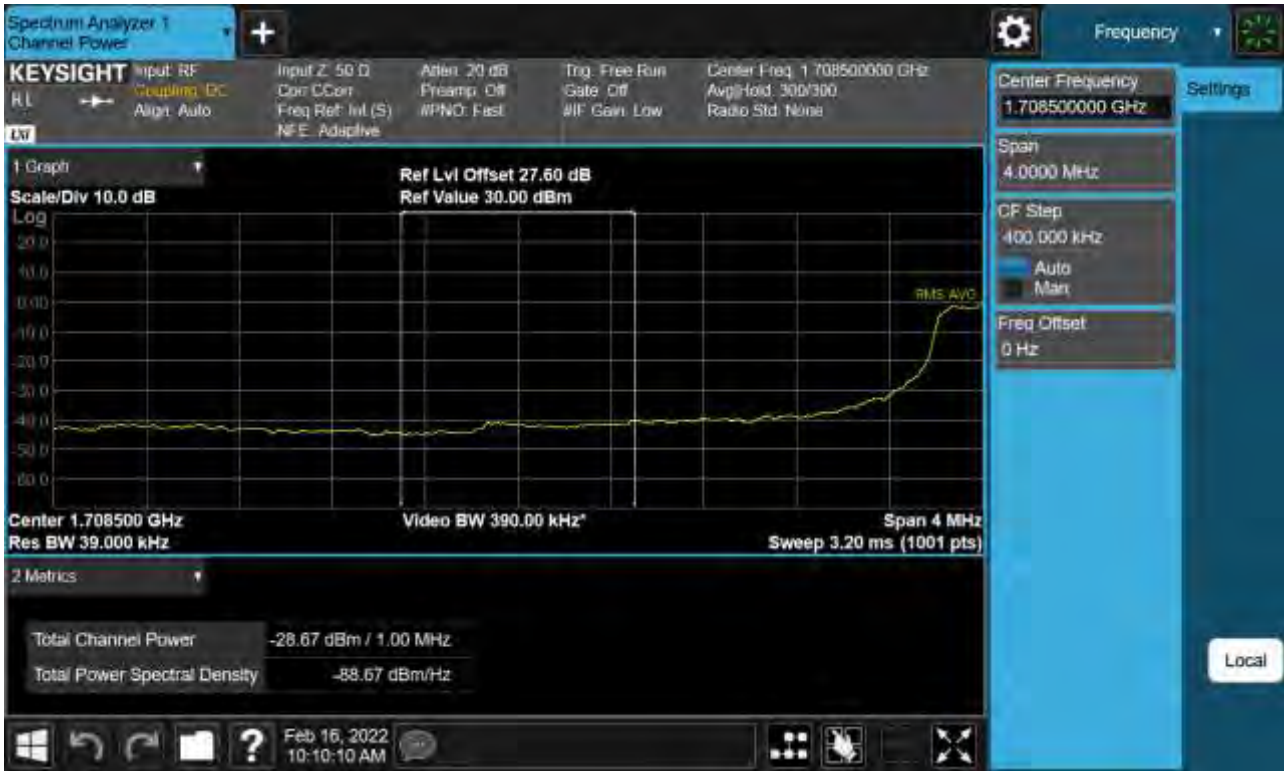


Sub6 n66. Lower Band Edge Plot (15 M BW Ch.343500 BPSK RB 1, Offset 0) -1



Sub6 n66. Lower Band Edge Plot (15 M BW Ch.343500 BPSK Full RB) -2



Sub6 n66. Lower Extended Band Edge Plot (15 M BW Ch.343500 BPSK_ Full RB) -3

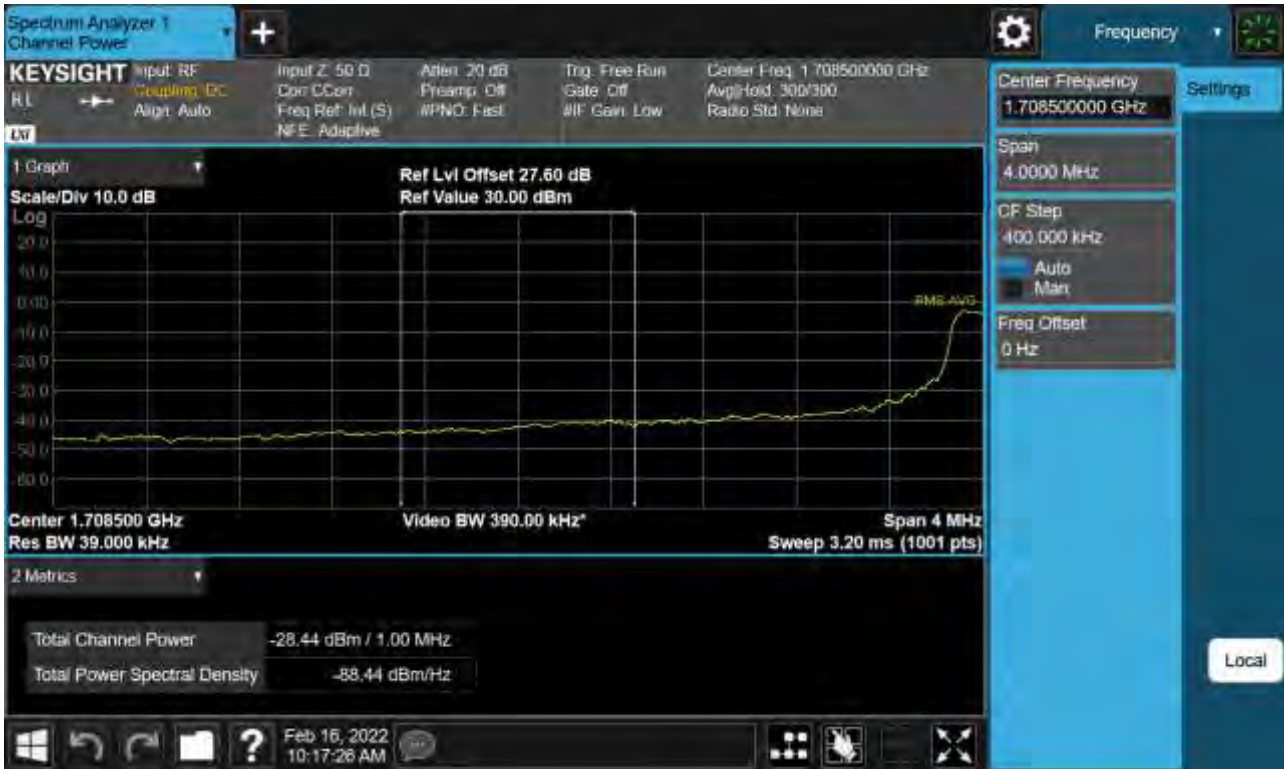


Sub6 n66. Lower Band Edge Plot (20 M BW Ch.344000 BPSK RB 1, Offset 0) -1



Sub6 n66. Lower Band Edge Plot (20 M BW Ch.344000 BPSK Full RB) -2



Sub6 n66. Lower Extended Band Edge Plot (20 M BW Ch.344000 BPSK_ Full RB) -3

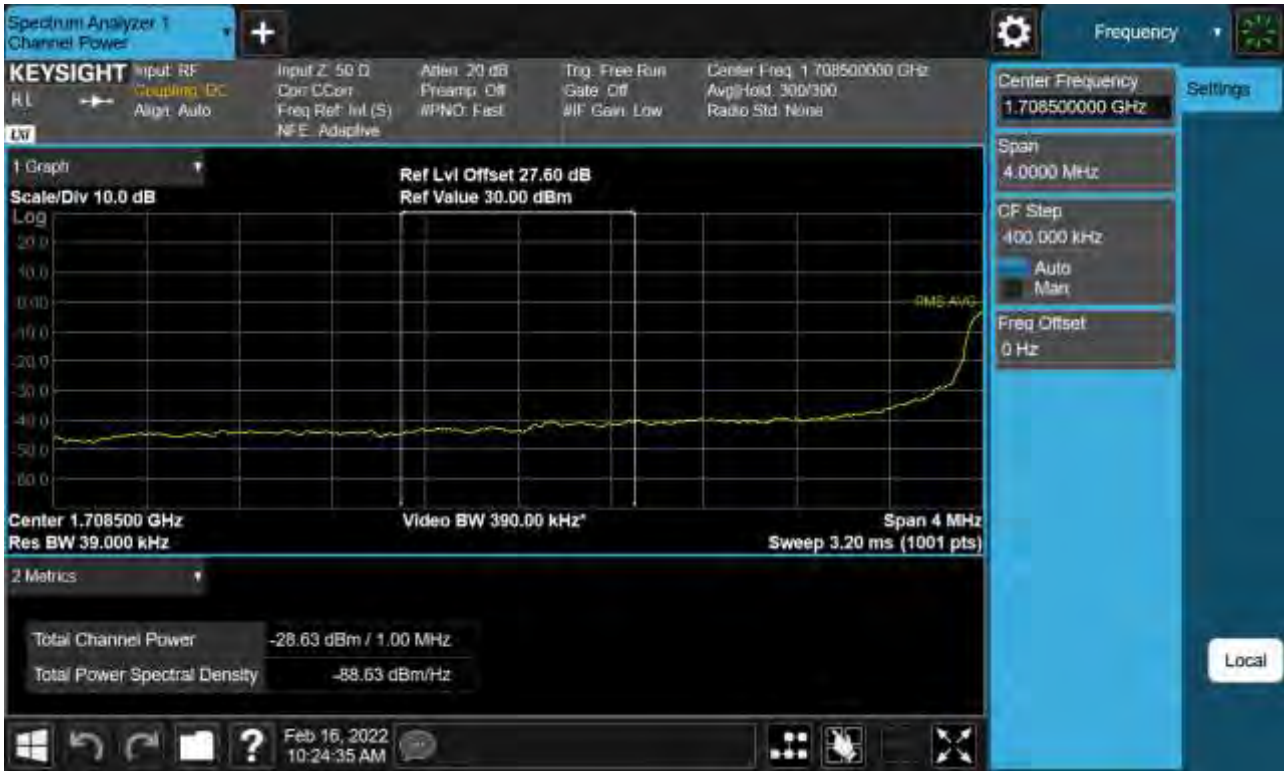


Sub6 n66. Lower Band Edge Plot (25 M BW Ch.344500 BPSK RB 1, Offset 0) -1



Sub6 n66. Lower Band Edge Plot (25 M BW Ch.344500 BPSK Full RB) -2



Sub6 n66. Lower Extended Band Edge Plot (25 M BW Ch.344500 BPSK_ Full RB) -3

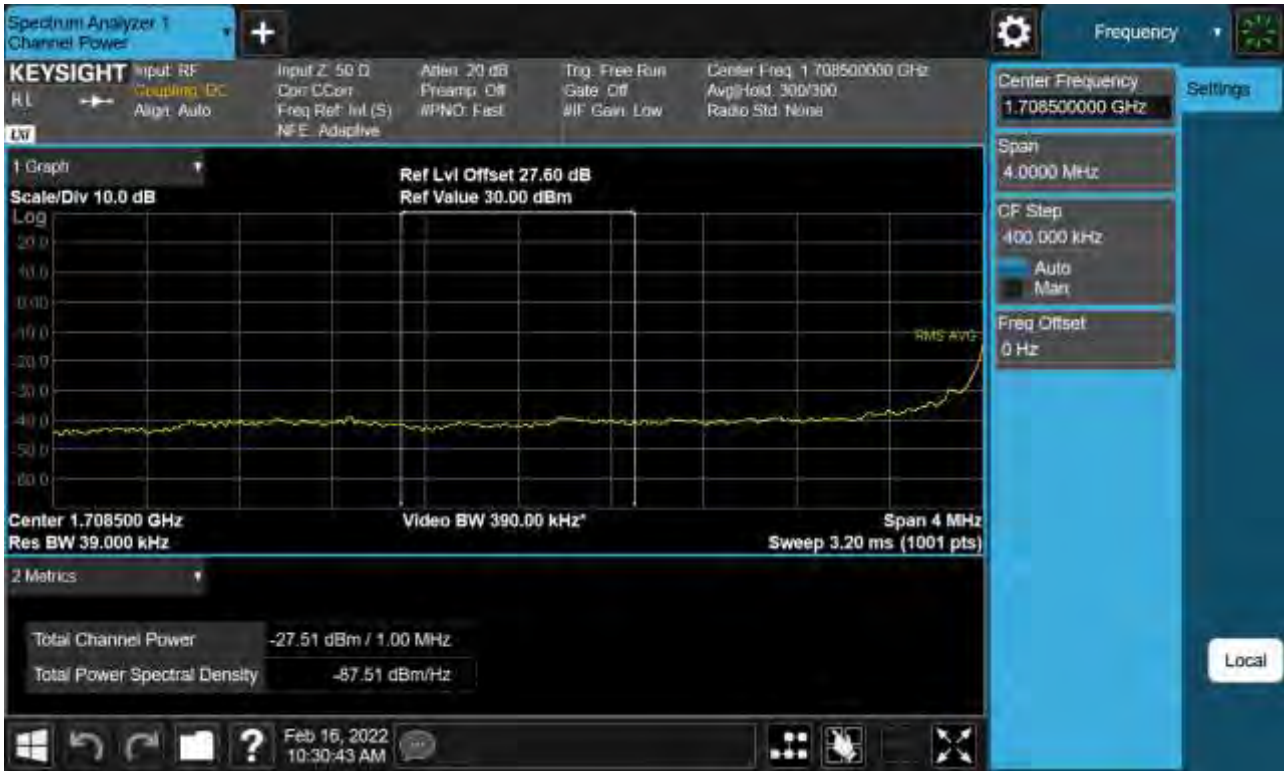


Sub6 n66. Lower Band Edge Plot (30 M BW Ch.345000 BPSK RB 1, Offset 0) -1



Sub6 n66. Lower Band Edge Plot (30 M BW Ch.345000 BPSK Full RB) -2



Sub6 n66. Lower Extended Band Edge Plot (30 M BW Ch.345000 BPSK_ Full RB) -3

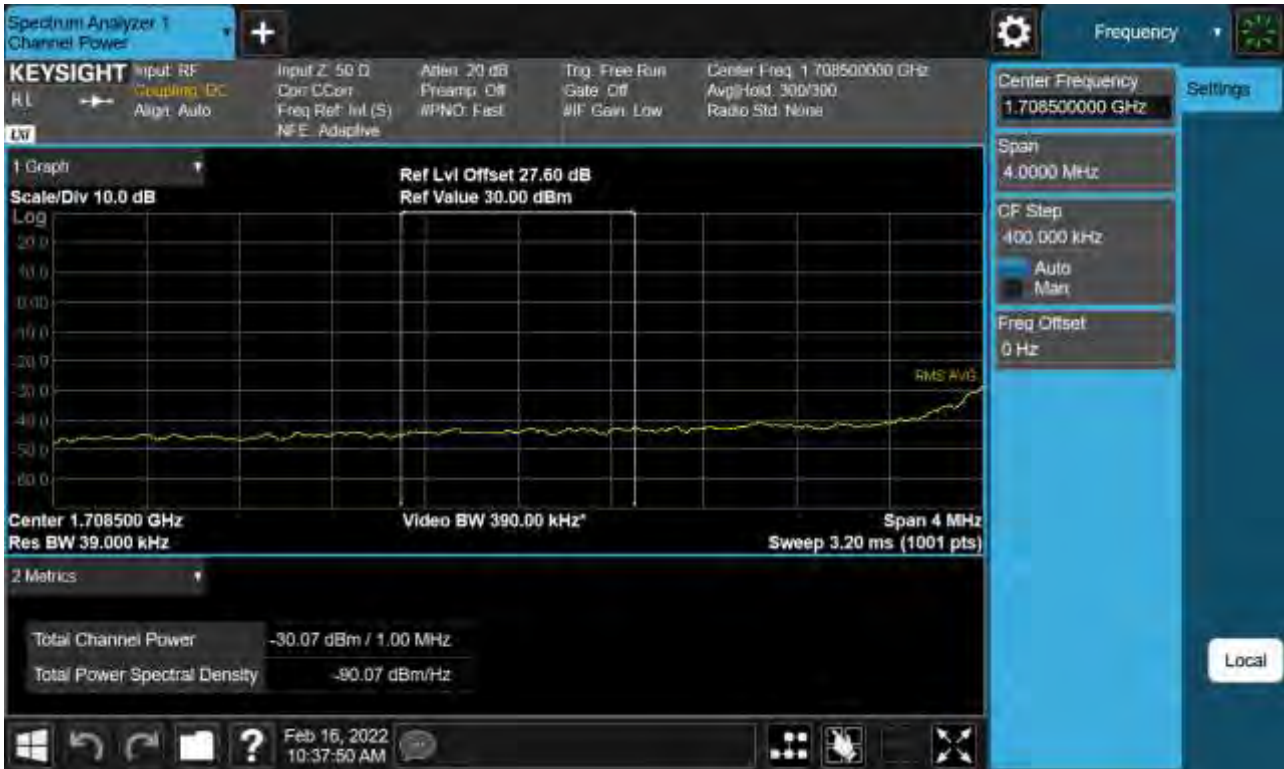


Sub6 n66. Lower Band Edge Plot (40 M BW Ch.346000 BPSK RB 1, Offset 0) -1



Sub6 n66. Lower Band Edge Plot (40 M BW Ch.346000 BPSK Full RB) -2



Sub6 n66. Lower Extended Band Edge Plot (40 M BW Ch.346000 BPSK_ Full RB) -3

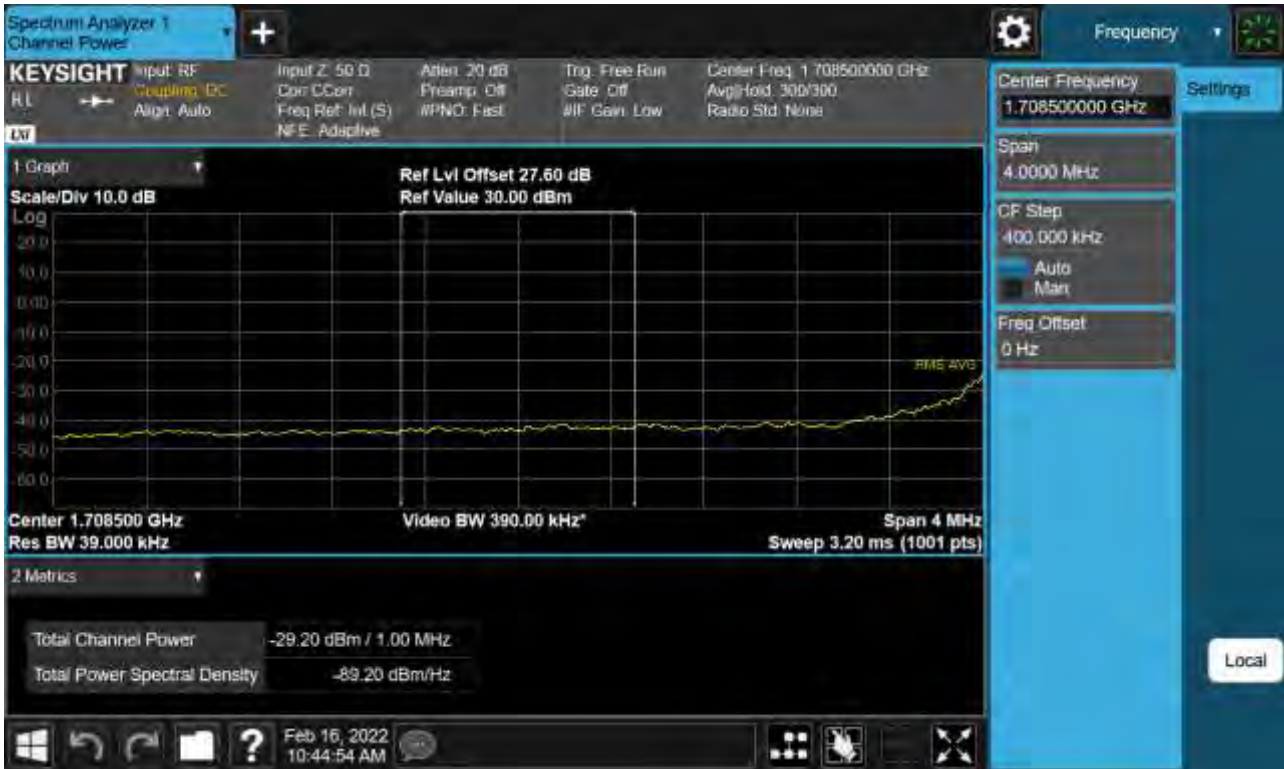

Sub6 n66. Upper Band Edge Plot (5 M BW Ch.355500 BPSK_RB1_Offset 24) -1



Sub6 n66. Upper Band Edge Plot (5 M BW Ch.355500 BPSK_ Full RB) -2



Sub6 n66. Upper Extended Band Edge Plot (5 M BW Ch.355500 BPSK_ Full RB) -3



Sub6 n66. Upper Band Edge Plot (10 M BW Ch.355000 BPSK_RB1_Offset 51) -1



Sub6 n66. Upper Band Edge Plot (10 M BW Ch.355000 BPSK_ Full RB) -2



Sub6 n66. Upper Extended Band Edge Plot (10 M BW Ch.355000 BPSK_ Full RB) -3



Sub6 n66. Upper Band Edge Plot (15 M BW Ch.354500 BPSK_RB1_Offset 78) -1



Sub6 n66. Upper Band Edge Plot (15 M BW Ch.354500 BPSK_ Full RB) -2



Sub6 n66. Upper Extended Band Edge Plot (15 M BW Ch.354500 BPSK_ Full RB) -3




Sub6 n66. Upper Band Edge Plot (20 M BW Ch.354000 BPSK_RB1_Offset 105) -1



Sub6 n66. Upper Band Edge Plot (20 M BW Ch.354000 BPSK_ Full RB) -2



Sub6 n66. Upper Extended Band Edge Plot (20 M BW Ch.354000 BPSK_ Full RB) -3

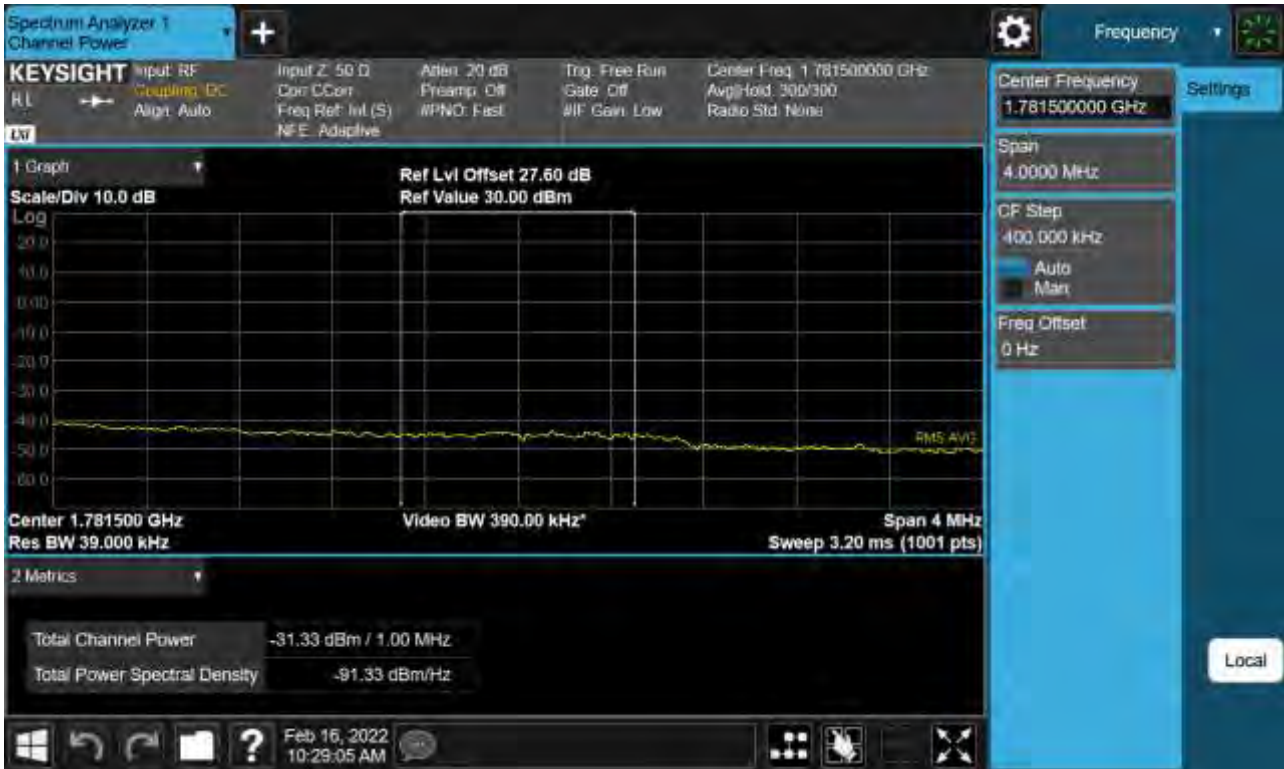


Sub6 n66. Upper Band Edge Plot (25 M BW Ch.353500 BPSK_RB1_Offset 105) -1



Sub6 n66. Upper Band Edge Plot (25 M BW Ch.353500 BPSK_ Full RB) -2



Sub6 n66. Upper Extended Band Edge Plot (25 M BW Ch.353500 BPSK_ Full RB) -3

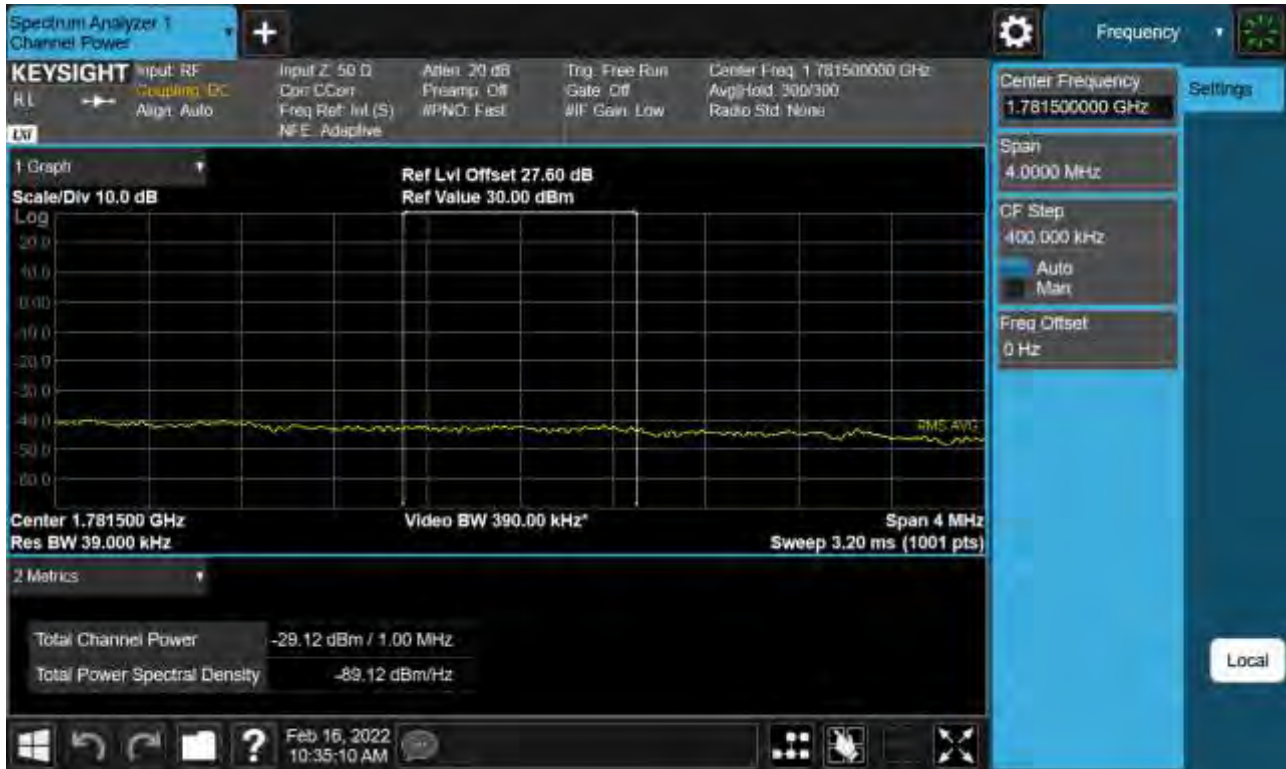

Sub6 n66. Upper Band Edge Plot (30 M BW Ch.353000 BPSK_RB1_Offset 159) -1



Sub6 n66. Upper Band Edge Plot (30 M BW Ch.353000 BPSK_ Full RB) -2



Sub6 n66. Upper Extended Band Edge Plot (30 M BW Ch.353000 BPSK_ Full RB) -3



Sub6 n66. Upper Band Edge Plot (40 M BW Ch.352000 BPSK_RB1_Offset 215) -1



Sub6 n66. Upper Band Edge Plot (40 M BW Ch.352000 BPSK_ Full RB) -2



Sub6 n66. Upper Extended Band Edge Plot (40 M BW Ch.352000 BPSK_ Full RB) -3



Sub6 n66. Conducted Spurious Plot_1 (342500ch_5 MHz_BPSK_RB 1_1)




Sub6 n66. Conducted Spurious Plot_2 (342500ch_5 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_1 (349000ch_5 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_2 (349000ch_5 MHz_BPSK_RB 1_1)

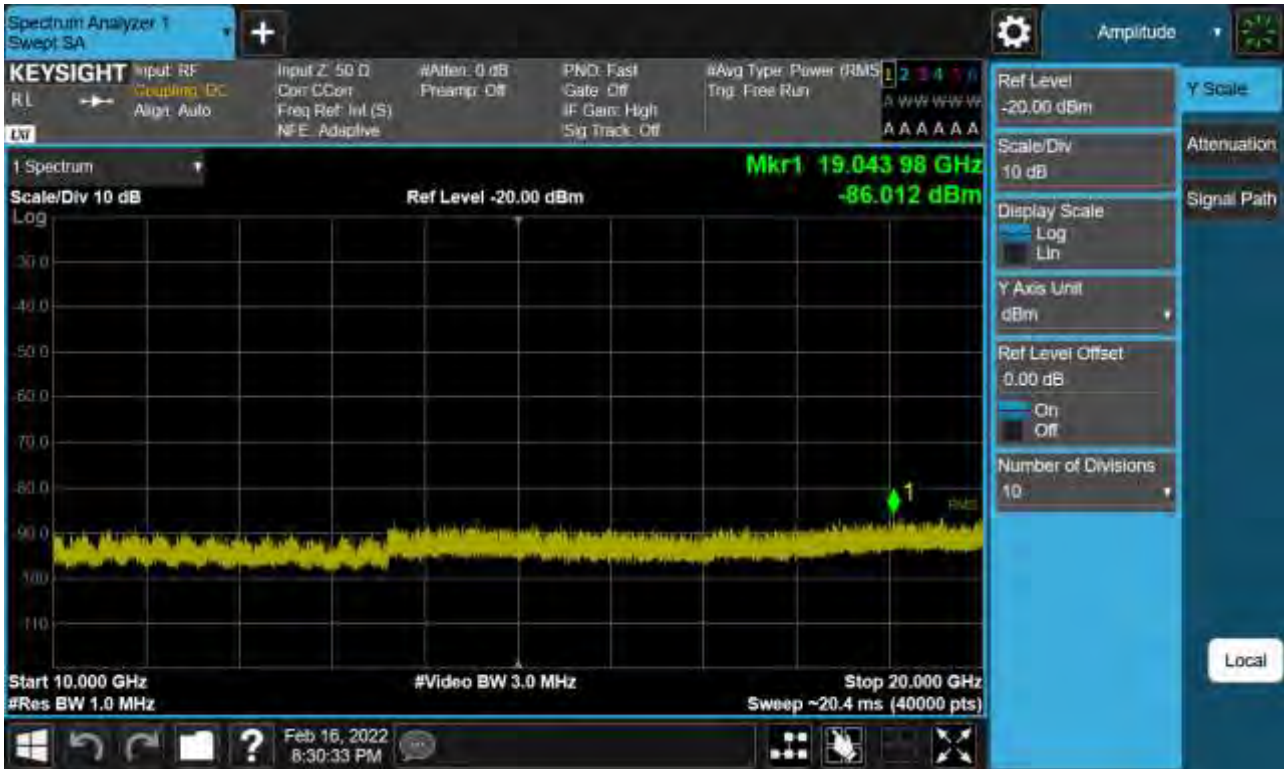

Sub6 n66. Conducted Spurious Plot_1 (355500ch_5 MHz_BPSK_RB 1_1)




Sub6 n66. Conducted Spurious Plot_2 (355500ch_5 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_1 (343000ch_10 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_2 (343000ch_10 MHz_BPSK_RB 1_1)

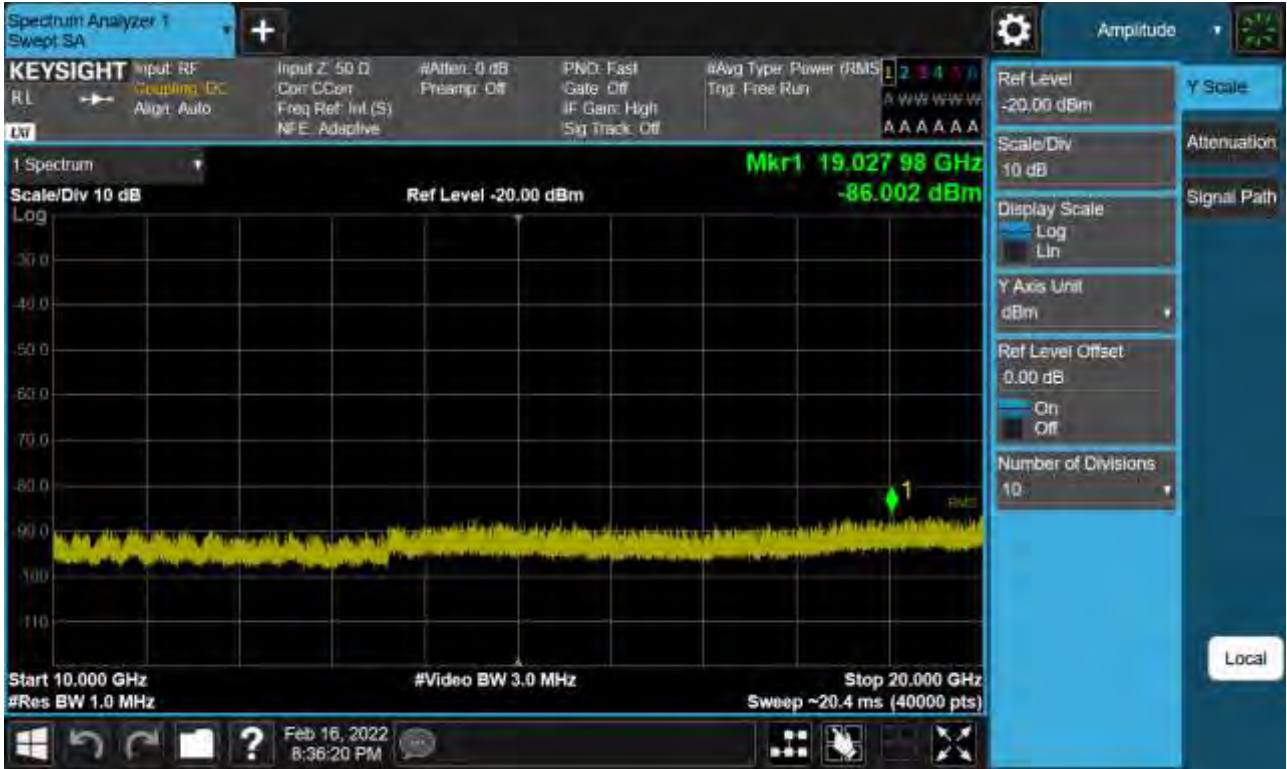

Sub6 n66. Conducted Spurious Plot_1 (349000ch_10 MHz_BPSK_RB 1_1)




Sub6 n66. Conducted Spurious Plot_2 (349000ch_10 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_1 (355000ch_10 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_2 (355000ch_10 MHz_BPSK_RB 1_1)

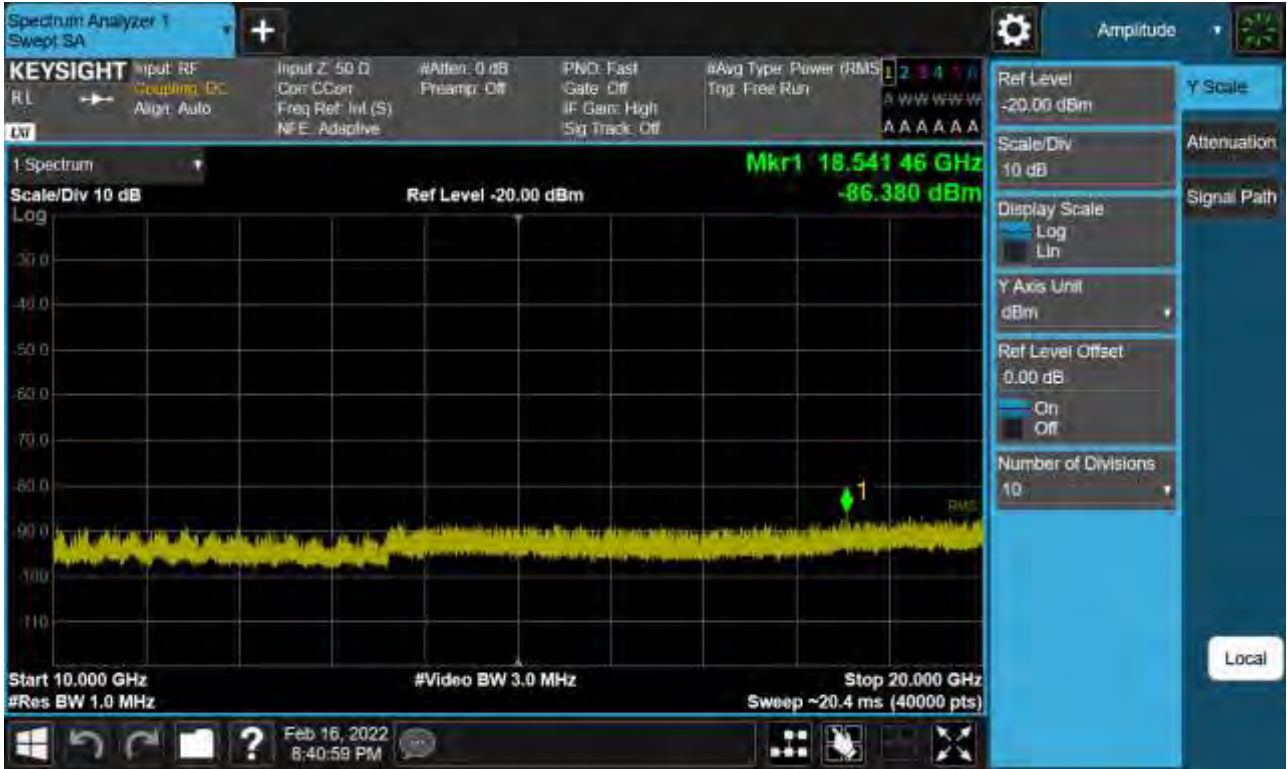

Sub6 n66. Conducted Spurious Plot_1 (343500ch_15 MHz_BPSK_ RB 1_1)



Sub6 n66. Conducted Spurious Plot_2 (343500ch_15 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_1 (349000ch_15 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_2 (349000ch_15 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_1 (354500ch_15 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_2 (354500ch_15 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_1 (344000ch_20 MHz_BPSK_RB 1_1)




Sub6 n66. Conducted Spurious Plot_2 (344000ch_20 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_1 (349000ch_20 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_2 (349000ch_20 MHz_BPSK_RB 1_1)

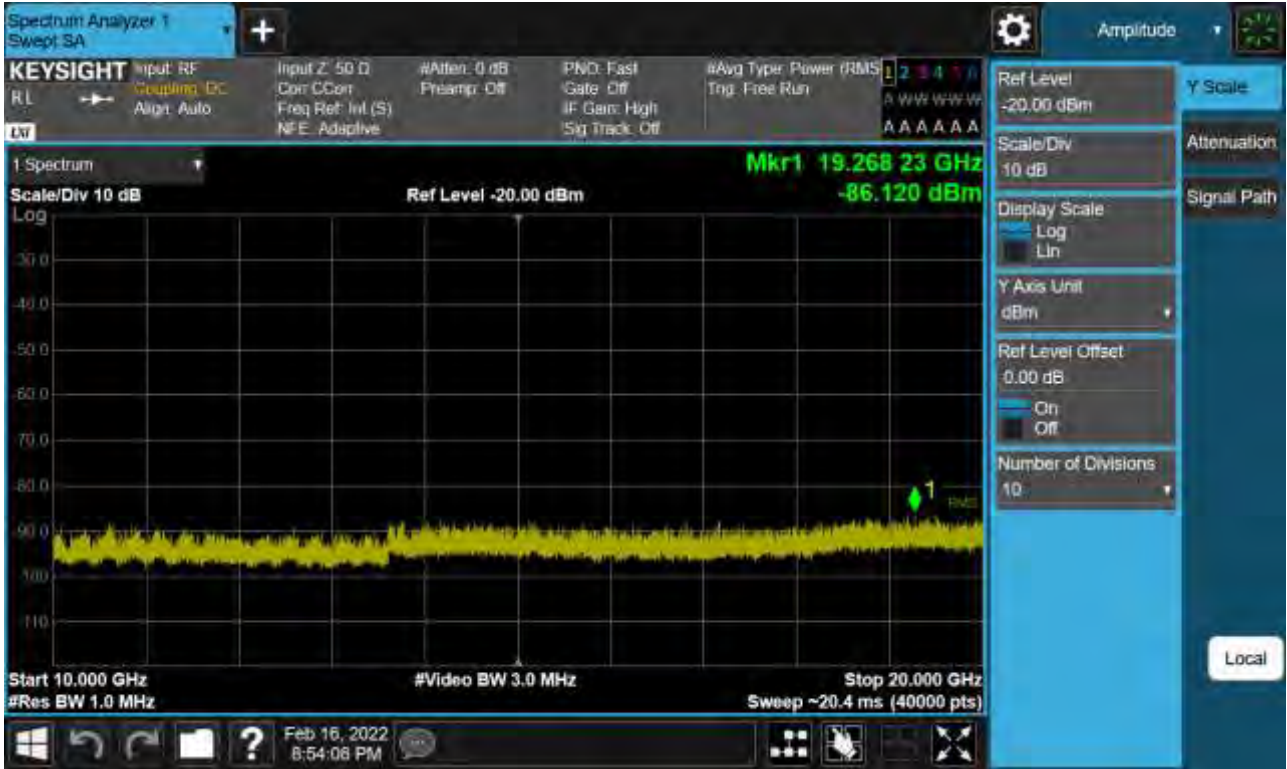

Sub6 n66. Conducted Spurious Plot_1 (354000ch_20 MHz_BPSK_ RB 1_1)



Sub6 n66. Conducted Spurious Plot_2 (354000ch_20 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_1 (344500ch_25 MHz_BPSK_RB 1_1)




Sub6 n66. Conducted Spurious Plot_2 (344500ch_25 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_1 (349000ch_25 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_2 (349000ch_25 MHz_BPSK_RB 1_1)

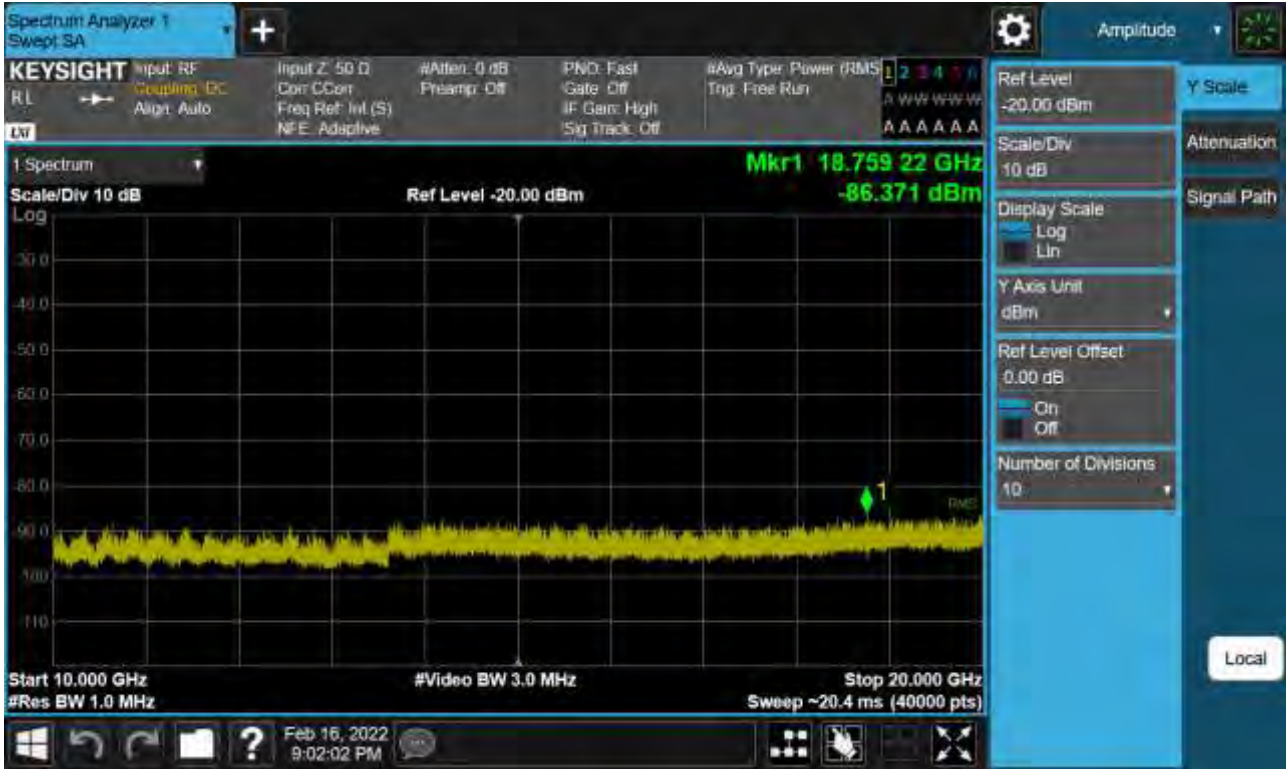

Sub6 n66. Conducted Spurious Plot_1 (353500ch_25 MHz_BPSK_ RB 1_1)




Sub6 n66. Conducted Spurious Plot_2 (353500ch_20 MHz_BPSK_ RB 1_1)



Sub6 n66. Conducted Spurious Plot_1 (345000ch_30 MHz_BPSK_RB 1_1)




Sub6 n66. Conducted Spurious Plot_2 (345000ch_30 MHz_BPSK_ RB 1_1)

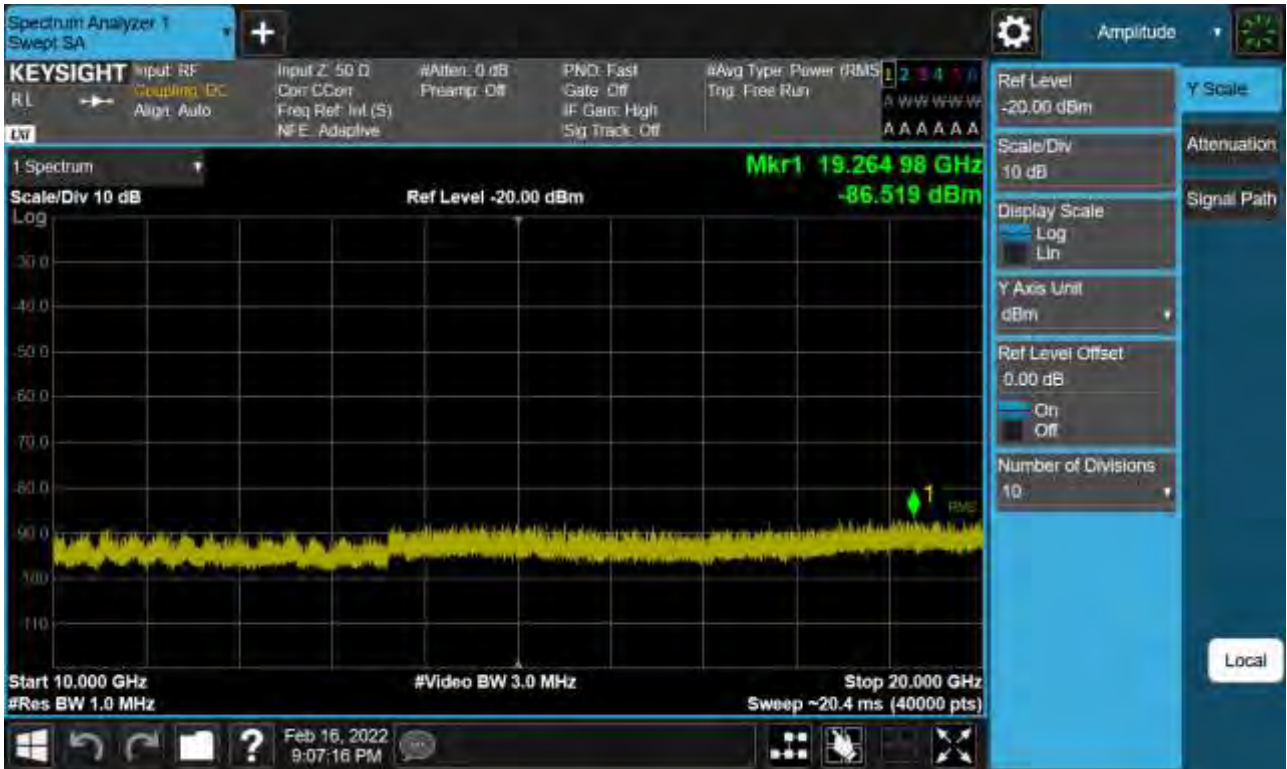

Sub6 n66. Conducted Spurious Plot_1 (349000ch_30 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_2 (349000ch_30 MHz_BPSK_RB 1_1)

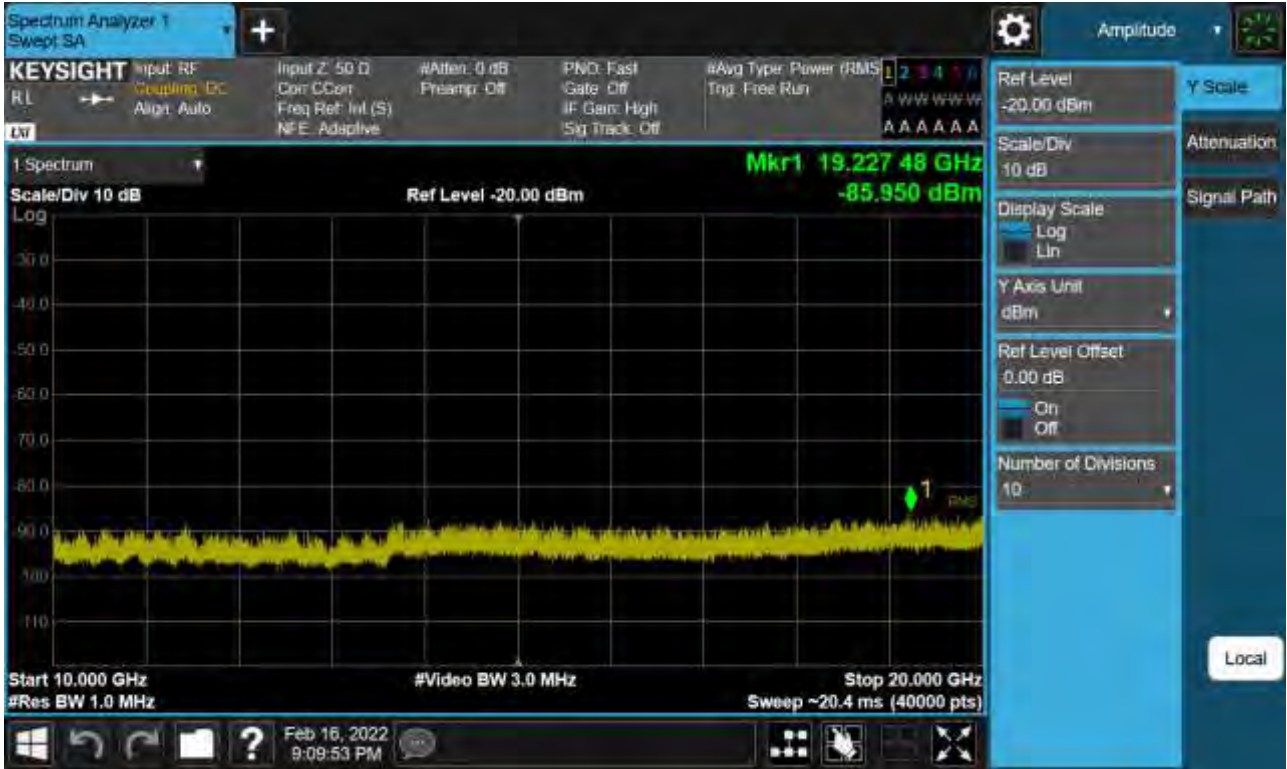

Sub6 n66. Conducted Spurious Plot_1 (353000ch_30 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_2 (353000ch_30 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_1 (346000ch_40 MHz_BPSK_ RB 1_1)



Sub6 n66. Conducted Spurious Plot_2 (346000ch_40 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_1 (349000ch_40 MHz_BPSK_ RB 1_1)




Sub6 n66. Conducted Spurious Plot_2 (349000ch_40 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_1 (352000ch_40 MHz_BPSK_RB 1_1)



Sub6 n66. Conducted Spurious Plot_2 (352000ch_40 MHz_BPSK_ RB 1_1)

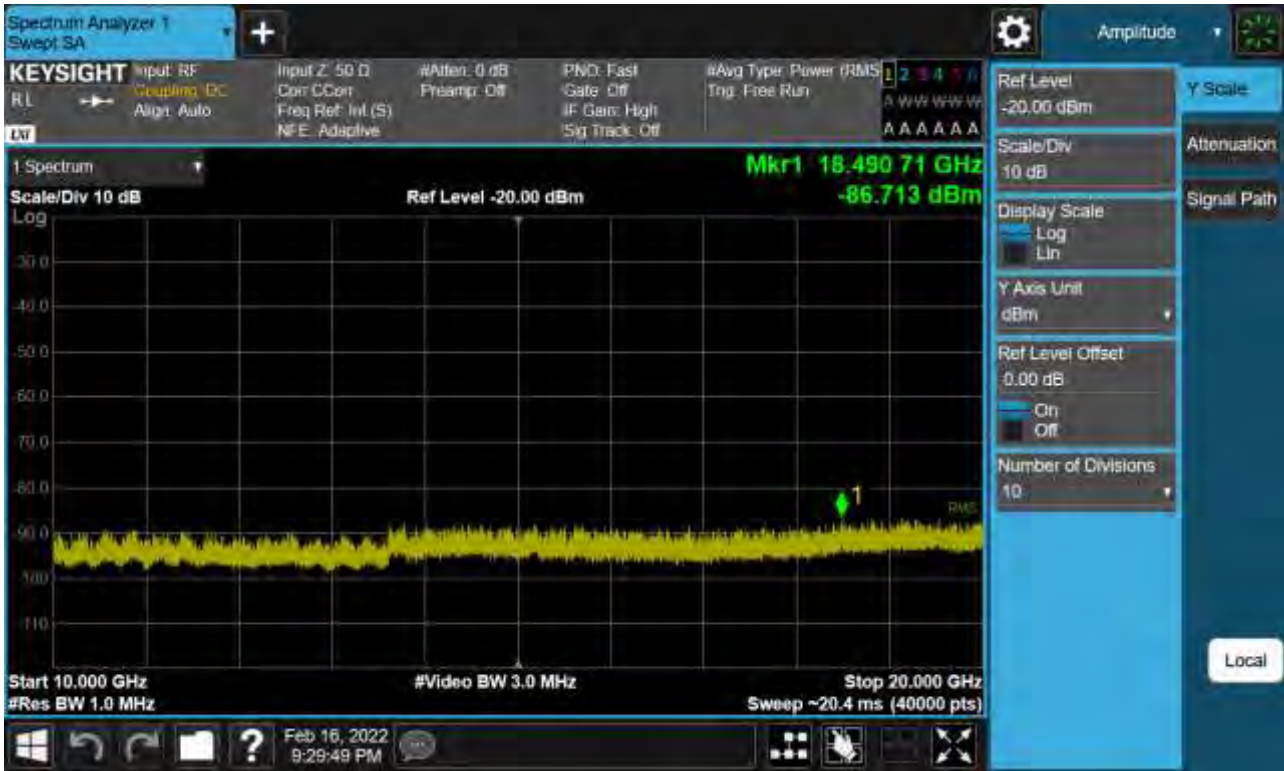

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2203-FC018-P