



CERTIFICATION TEST REPORT

Report Number. : 4789739083-E6V3

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-M625F/DS, SM-E625F/DS

FCC ID : A3LSMM625F

EUT Description : GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART E

Date Of Issue:

January 14, 2021

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



ACCREDITED

Testing Laboratory

TL-637

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	01/06/21	Initial issue	Sungeun Lee
V2	01/11/21	Updated to address TCB's question	Sungeun Lee
V3	01/14/21	Updated to address TCB's question	Sungeun Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>7</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>7</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
4.4. <i>DECISION RULE.....</i>	<i>8</i>
5. EQUIPMENT UNDER TEST.....	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>11</i>
5.3. <i>List of test reduction and modes covering other modes:</i>	<i>11</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>12</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>12</i>
6. TEST AND MEASUREMENT EQUIPMENT	14
7. SUMMARY TABLE	15
8. MEASUREMENT METHODS	16
9. REFERENCE MEASUREMENTS RESULTS	17
9.1. <i>ON TIME AND DUTY CYCLE RESULTS.....</i>	<i>17</i>
9.2. <i>DUTY CYCLE PLOTS</i>	<i>17</i>
9.3. <i>26 dB BANDWIDTH.....</i>	<i>18</i>
9.3.1. <i>5.2 GHz BAND.....</i>	<i>18</i>
9.3.2. <i>5.3 GHz BAND.....</i>	<i>18</i>
9.3.3. <i>5.5 GHz BAND.....</i>	<i>19</i>
9.3.4. <i>STRADDLE CHANNEL.....</i>	<i>19</i>
9.3.5. <i>26 dB BANDWIDTH PLOTS</i>	<i>20</i>
10. ANTENNA PORT TEST RESULTS.....	27
10.1. <i>6 dB BANDWIDTH</i>	<i>27</i>
10.1.1. <i>5.8 GHz BAND.....</i>	<i>27</i>
10.1.2. <i>6 dB BANDWIDTH PLOTS</i>	<i>28</i>
10.2. <i>OUTPUT POWER AND PPSD.....</i>	<i>30</i>
10.2.1. <i>1Tx MODE IN THE 5.2 GHz BAND.....</i>	<i>31</i>
10.2.2. <i>1Tx MODE IN THE 5.3 GHz BAND.....</i>	<i>33</i>

10.2.3.	1Tx MODE IN THE 5.5 GHz BAND.....	35
10.2.4.	1Tx MODE IN THE 5.8 GHz BAND.....	37
10.2.5.	1Tx Mode Straddle channel IN THE 5.5 GHz BAND	38
10.2.6.	1Tx Mode Straddle channel IN THE 5.8 GHz BAND	39
10.2.7.	OUTPUT POWER AND PPSD PLOTS	40
11.	TRANSMITTER ABOVE 1 GHz.....	50
11.1.	5.2 GHz.....	53
11.1.1.	TX ABOVE 1GHz 802.11a 1Tx MODE IN THE 5.2GHz BAND	53
11.1.2.	TX ABOVE 1GHz 802.11n HT20 1Tx MODE IN THE 5.2GHz BAND	58
11.1.3.	TX ABOVE 1GHz 802.11n HT40 1Tx MODE IN THE 5.2GHz BAND	63
11.1.4.	TX ABOVE 1GHz 802.11ac VHT80 1Tx MODE IN THE 5.2GHz BAND	67
11.2.	5.3 GHz.....	70
11.2.1.	TX ABOVE 1GHz 802.11a 1Tx MODE IN THE 5.3GHz BAND	70
11.2.2.	TX ABOVE 1GHz 802.11n HT20 1Tx MODE IN THE 5.3GHz BAND	75
11.2.3.	TX ABOVE 1GHz 802.11n HT40 1Tx MODE IN THE 5.3GHz BAND	80
11.2.4.	TX ABOVE 1GHz 802.11ac VHT80 1Tx MODE IN THE 5.3GHz BAND	84
11.3.	5.5-5.6 GHz.....	87
11.3.1.	TX ABOVE 1 GHz 802.11a 1Tx MODE IN THE 5.5 GHz BAND	87
11.3.2.	TX ABOVE 1GHz 802.11n HT20 1Tx MODE IN THE 5.5GHz BAND	94
11.3.3.	TX ABOVE 1GHz 802.11n HT40 1Tx MODE IN THE 5.5GHz BAND	101
11.3.4.	TX ABOVE 1GHz 802.11ac VHT80 1Tx MODE IN THE 5.5GHz BAND	108
11.4.	5.8 GHz.....	114
11.4.1.	TX ABOVE 1GHz 802.11a 1Tx MODE IN THE 5.8GHz BAND	114
11.4.2.	TX ABOVE 1GHz 802.11n HT20 1Tx MODE IN THE 5.8GHz BAND	121
11.4.3.	TX ABOVE 1GHz 802.11n HT40 1Tx MODE IN THE 5.8GHz BAND	128
11.4.4.	TX ABOVE 1GHz 802.11ac VHT80 1Tx MODE IN THE 5.8GHz BAND	134
11.5.	<i>Spurious Emissions for Simultaneous Transmission</i>	139
11.5.1.	Worst test case RSDB condition	139
11.5.2.	Test Results.....	140
12.	WORST-CASE BELOW 1 GHz	142
13.	AC POWER LINE CONDUCTED EMISSIONS.....	143
14.	DYNAMIC FREQUENCY SELECTION.....	146
14.1.	OVERVIEW.....	146
14.1.1.	LIMITS.....	146
14.1.2.	TEST AND MEASUREMENT SYSTEM	150
14.1.3.	SETUP OF EUT.....	153
14.1.4.	DESCRIPTION OF EUT	154
14.2.	RESULTS FOR 80 MHz BANDWIDTH (UNII-2A BAND).....	155
14.2.1.	TEST CHANNEL	155
14.2.2.	RADAR WAVEFORM AND TRAFFIC	155
14.2.3.	OVERLAPPING CHANNEL TESTS.....	156
14.2.4.	MOVE AND CLOSING TIME	156

14.3.	RESULTS FOR 80 MHz BANDWIDTH (UNII-2C BAND).....	159
14.3.1.	TEST CHANNEL	159
14.3.2.	RADAR WAVEFORM AND TRAFFIC	159
14.3.3.	OVERLAPPING CHANNEL TESTS.....	160
14.3.4.	MOVE AND CLOSING TIME	160

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC
MODEL NUMBER: SM-M625F/DS, SM-E625F/DS
SERIAL NUMBER: R38NB02PGTK (CONDUCTED);
R38NB02PH1D, R38NB02PGWB (RADIATED);
DATE TESTED: NOV 30, 2020 – JAN 05, 2021;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Sungeun Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 789033 D02 General UNII Test Procedures New Rules v02r01
4. KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
5. KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02
6. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.01 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.26 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.90 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.49 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac and NFC.
 This test report addresses the NII (UNII 802.11a/n/ac) operational mode.

This report covers the Samsung models SM-M625F/DS and SM-E625F/DS.
 These models are identical in hardware except SM-E625F/DS has other Software name.
 With some pre-scan, model SM-M625F/DS was set for final test.

Note. This EUT does not support channel puncturing.

WiFi operating mode

Frequency rage	Mode	ANT1
5GHz (5180 MHz ~ 5825 MHz)	802.11a SISO	TX/RX
	802.11n SISO	TX/RX
	802.11ac SISO	TX/RX

Simultaneous TX Condition

Simultaneous Tx Condition - RSDB

Mode	# of TX	5GHz WLAN	2.4GHz WLAN	Test Case
		ANT1	ANT1	
2.4GHz + 5GHz RSDB	2	0	0	0

MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

UNII-1

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
5180 - 5240	802.11a SISO	15.89	38.82
	802.11n(HT20) SISO	15.87	38.64
5190 - 5230	802.11n(HT40) SISO	14.52	28.31
5210	802.11ac(VHT80) SISO	12.43	17.50

UNII-2A

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
5260 - 5320	802.11a SISO	15.80	38.02
	802.11n(HT20) SISO	15.99	39.72
5270 - 5310	802.11n(HT40) SISO	14.34	27.16
5290	802.11ac(VHT80) SISO	12.11	16.26

UNII-2C

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
5500 - 5720	802.11a SISO	11.17	13.09
	802.11n(HT20) SISO	11.13	12.97
5510 - 5710	802.11n(HT40) SISO	14.20	26.30
5530 - 5690	802.11ac(VHT80) SISO	11.94	15.63

UNII-3

Frequency Range [MHz]	Mode	Output Power [dBm]	Output Power [mW]
5745 - 5825	802.11a SISO	9.87	9.71
	802.11n(HT20) SISO	9.87	9.71
5755 - 5795	802.11n(HT40) SISO	9.82	9.59
5775	802.11ac(VHT80) SISO	9.78	9.51

5.2. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
 Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes a internal antenna, with a maximum gain of:

Frequency Band [MHz]	Antenna 1 Gain [dBi]
UNII 1 5150 - 5250	-5.70
UNII 2A 5250 - 5350	-4.20
UNII 2C 5470 - 5725	-6.30
UNII 3 5725 - 5850	-5.80

5.3. List of test reduction and modes covering other modes:

The output power on covered modes is equal to or less than one referenced.

Authorized Frequency Band			
Mode	Antenna Stream	Mode	Covered by
802.11a	SISO	802.11a 1TX	
802.11n HT20		802.11n HT20 1TX	
802.11ac VHT20		802.11ac VHT20 1TX	802.11n HT20 1TX
802.11n HT40		802.11n HT40 1TX	
802.11ac VHT40		802.11ac VHT40 1TX	802.11n HT40 1TX
802.11ac VHT80		802.11ac VHT80 1TX	

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation

Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps 1Tx
 802.11n HT20 mode: MCS0 1Tx
 802.11n HT40 mode: MCS0 1Tx
 802.11ac VHT80 mode: MCS0 1Tx

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37MAVSOLC7DK3	N/A
Data Cable	SAMSUNG	EP-DA705BBE	N/A	N/A
Earphone	SAMSUNG	EHS61ASFBE	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2 m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
 Test software exercised the EUT to enable NII mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

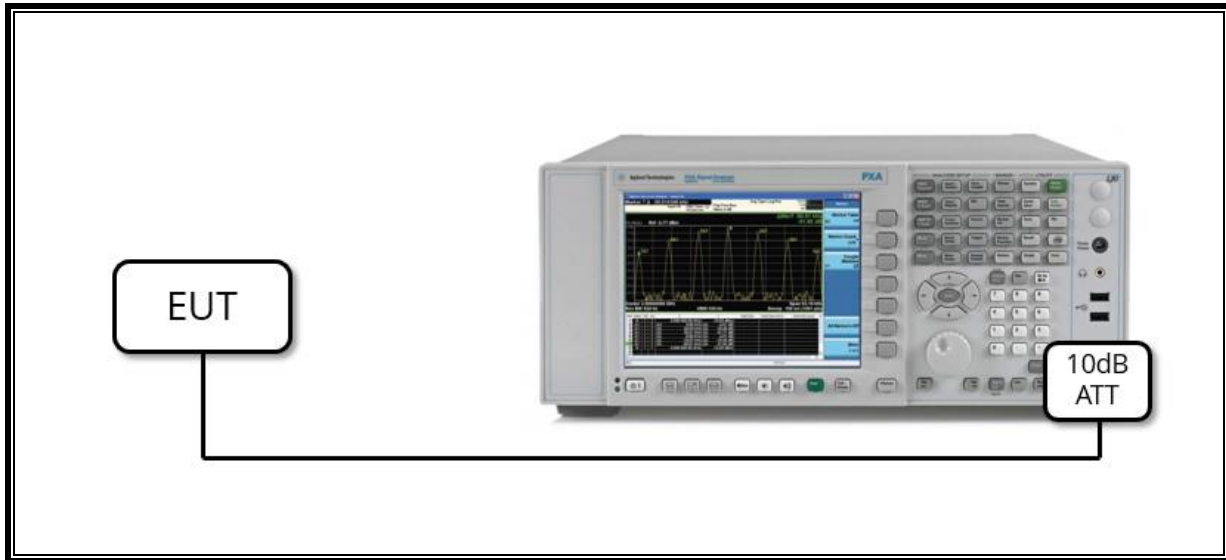

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

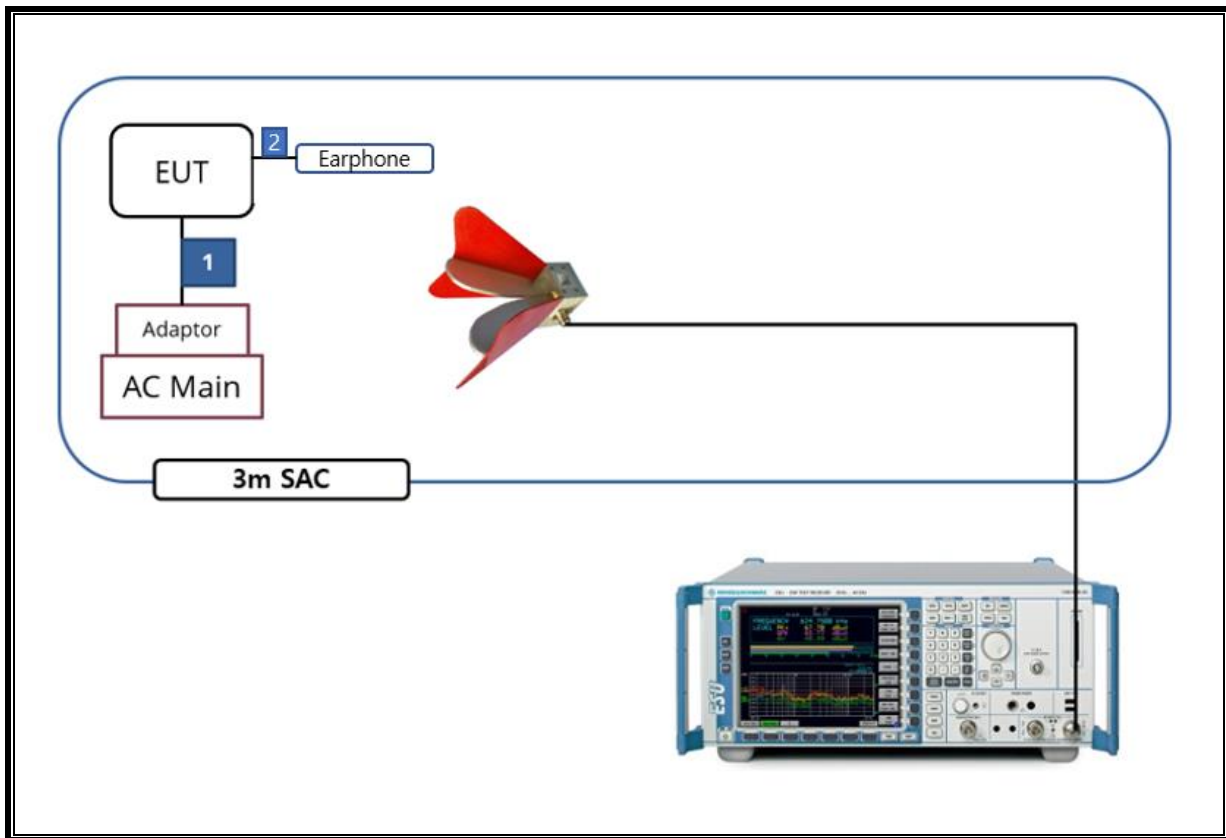

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-19-22
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-13-22
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-13-22
Antenna, Horn, 18 GHz	ETS	3115	00167211	07-27-22
Antenna, Horn, 18 GHz	ETS	3115	00161451	08-15-22
Antenna, Horn, 18 GHz	ETS	3117	00168724	07-27-22
Antenna, Horn, 18 GHz	ETS	3117	00168717	08-15-22
Antenna, Horn, 40 GHz	ETS	3116C	00166155	08-04-22
Antenna, Horn, 40 GHz	ETS	3116C	00168645	10-02-21
Preamplifier	ETS	3116C-PA	00168841	08-06-21
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-03-21
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-03-21
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-06-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-03-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-03-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-04-21
Spectrum Analyzer, 44 GHz	Keysight	N9030B	MY57143717	01-20-21
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-05-21
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-05-21
Spectrum Analyzer, 43.5 GHz	R&S	FSW43	104089	08-06-21
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-05-21
Attenuator	PASTERNAK	PE7087-10	A001	08-03-21
Attenuator	PASTERNAK	PE7087-10	A008	08-03-21
Attenuator	PASTERNAK	PE7004-10	2	08-04-21
Attenuator	PASTERNAK	PE7087-10	A009	08-05-21
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-03-21
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-03-21
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-04-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-03-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-03-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-04-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-03-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-03-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-04-21
LISN	R&S	ENV-216	101837	08-06-21
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-02-21
Termination	WEINSCHL	M1406A	T01	08-05-21
Attenuator	WEINSCHL	WA76-30-21	A015	08-05-21
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.407(e)	6dB Band width (5.8GHz)	500kHz	Conducted	PASS
15.407 (a)(2)	TX Cond. Power 5.15-2.25, 5.25-5.35 & 5.47-5.725	< 24dBm or 11+10Log(26dB BW)		PASS
15.407 (a)(3)	TX Cond. Power 5.725-5.825	< 30dBm		PASS
15.407 (a)(5)	PSD (5.2,5.3,5.5GHz)	<11dBm		PASS
15.407 (a)(5)	PSD (5.8GHz)	30dBm per 500kHz		PASS
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	PASS
15.407 (b) & 15.209	Radiated Spurious Emission	< 54dBuV/m		PASS
15.407 (h)(2)	Dynamic Frequency Selection	N/A	Conducted	PASS

8. MEASUREMENT METHODS

On-Time and Duty Cycle : KDB 789033 D02 v02r01, Section II.B.

6dB Emission BW : KDB 789033 D02 v02r01, Section II.C.2.

26dB Emission BW : KDB 789033 D02 v02r01, Section II.C.1.

99% Occupied BW : KDB 789033 D02 v02r01, Section II.D.

Conducted Output Power : KDB 789033 D02 v02r01, Section II.E.3.b(Method PM-G)

Conducted Output Power for Straddle Channel (ch144/142/138 for 20/40/80MHz BW):

KDB 789033 D02 v02r01, Section II.E.2.b(Method SA-1)

Power Spectral Density : KDB 789033 D02 v02r01, Section II.F.

Unwanted emissions in restricted bands : KDB 789033 D02 v02r01, Section II.G.3 – II.G.6.

Unwanted emissions in non-restricted bands : KDB 789033 D02 v02r01, Section II.G.3 – II.G.6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. REFERENCE MEASUREMENTS RESULTS

9.1. ON TIME AND DUTY CYCLE RESULTS

Mode	On Time [ms]	Period [ms]	Duty Cycle X [Linear]	Duty Cycle X [%]	Duty Cycle Correction Factor[dB]
802.11a SISO	2.791	2.890	0.97	96.57	0.15
802.11n(HT20) SISO	2.593	2.695	0.96	96.22	0.17
802.11n(HT40) SISO	2.488	2.584	0.96	96.28	0.16
802.11ac(VHT80) SISO	2.511	2.611	0.96	96.17	0.17

Note. If the duty cycle is over 98%, compensation is not included in average measurement.

LIMITS

None; for reporting purposes only.

PROCEDURE

KDB 789033 D02 v02r01 Zero-Span Spectrum Analyzer Method.

9.2. DUTY CYCLE PLOTS



9.3. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer with the RBW set to approximately 1% of EBW, the VBW > RBW, peak detector and max hold.

RESULTS

9.3.1. 5.2 GHz BAND

Band	Mode	Channel	Center Freq. [MHz]	26 dB BW [MHz]	Worst	99% BW [MHz](Note1)
				ANT1		ANT1
UNII-1	802.11a	Low	5180	21.09	21.09	16.724
		Mid	5200	21.26		16.707
		High	5240	21.20		16.693
	802.11n HT20	Low	5180	21.47	21.38	17.868
		Mid	5200	21.71		17.890
		High	5240	21.38		17.911
	802.11n HT40	Low	5190	39.92	39.92	36.278
		High	5230	39.98		36.289
	802.11ac VHT80	Mid	5210	81.72	81.72	75.670

Note1. As a result of 99% bandwidth test, the bandwidth of UNII-1 does not interfere with UNII-2A.

9.3.2. 5.3 GHz BAND

Band	Mode	Channel	Center Freq. [MHz]	26 dB BW [MHz]	Worst	99% BW [MHz](Note2)
				ANT1		ANT1
UNII-2A	802.11a	Low	5260	21.22	21.22	16.730
		Mid	5300	21.37		16.710
		High	5320	21.31		16.743
	802.11n HT20	Low	5260	21.66	21.49	17.908
		Mid	5300	21.49		17.882
		High	5320	21.67		17.869
	802.11n HT40	Low	5270	39.78	39.75	36.259
		High	5310	39.75		36.263
	802.11ac VHT80	Mid	5290	81.74	81.74	75.694

Note2. As a result of 99% bandwidth test, the bandwidth of UNII-2A does not interfere with UNII-1.

9.3.3. 5.5 GHz BAND


Band	Mode	Channel	Center Freq. [MHz]	26 dB BW [MHz]		Worst
				ANT1		
UNII-2C	802.11a	Low	5500	21.29		21.19
		Mid	5580	21.19		
		High	5700	21.36		
	802.11n HT20	Low	5500	21.30		21.30
		Mid	5580	21.70		
		High	5700	21.35		
	802.11n HT40	Low	5510	39.43		39.43
		Mid	5590	39.79		
		High	5670	39.82		
	802.11ac VHT80	Low	5530	81.50		81.33
		High	5610	81.33		

9.3.4. STRADDLE CHANNEL

Band	Mode	Channel	Center Freq. [MHz]	26 dB BW [MHz]	
				ANT1	
				UNII-2C	UNII-3
Straddle Channel	802.11a	Straddle	5720	15.736	5.840
	802.11n HT20	Straddle	5720	15.704	5.692
	802.11n HT40	Straddle	5710	35.024	4.860
	802.11ac VHT80	Straddle	5690	75.440	5.580

9.3.5. 26 dB BANDWIDTH PLOTS

UNII 5.2 GHz Band

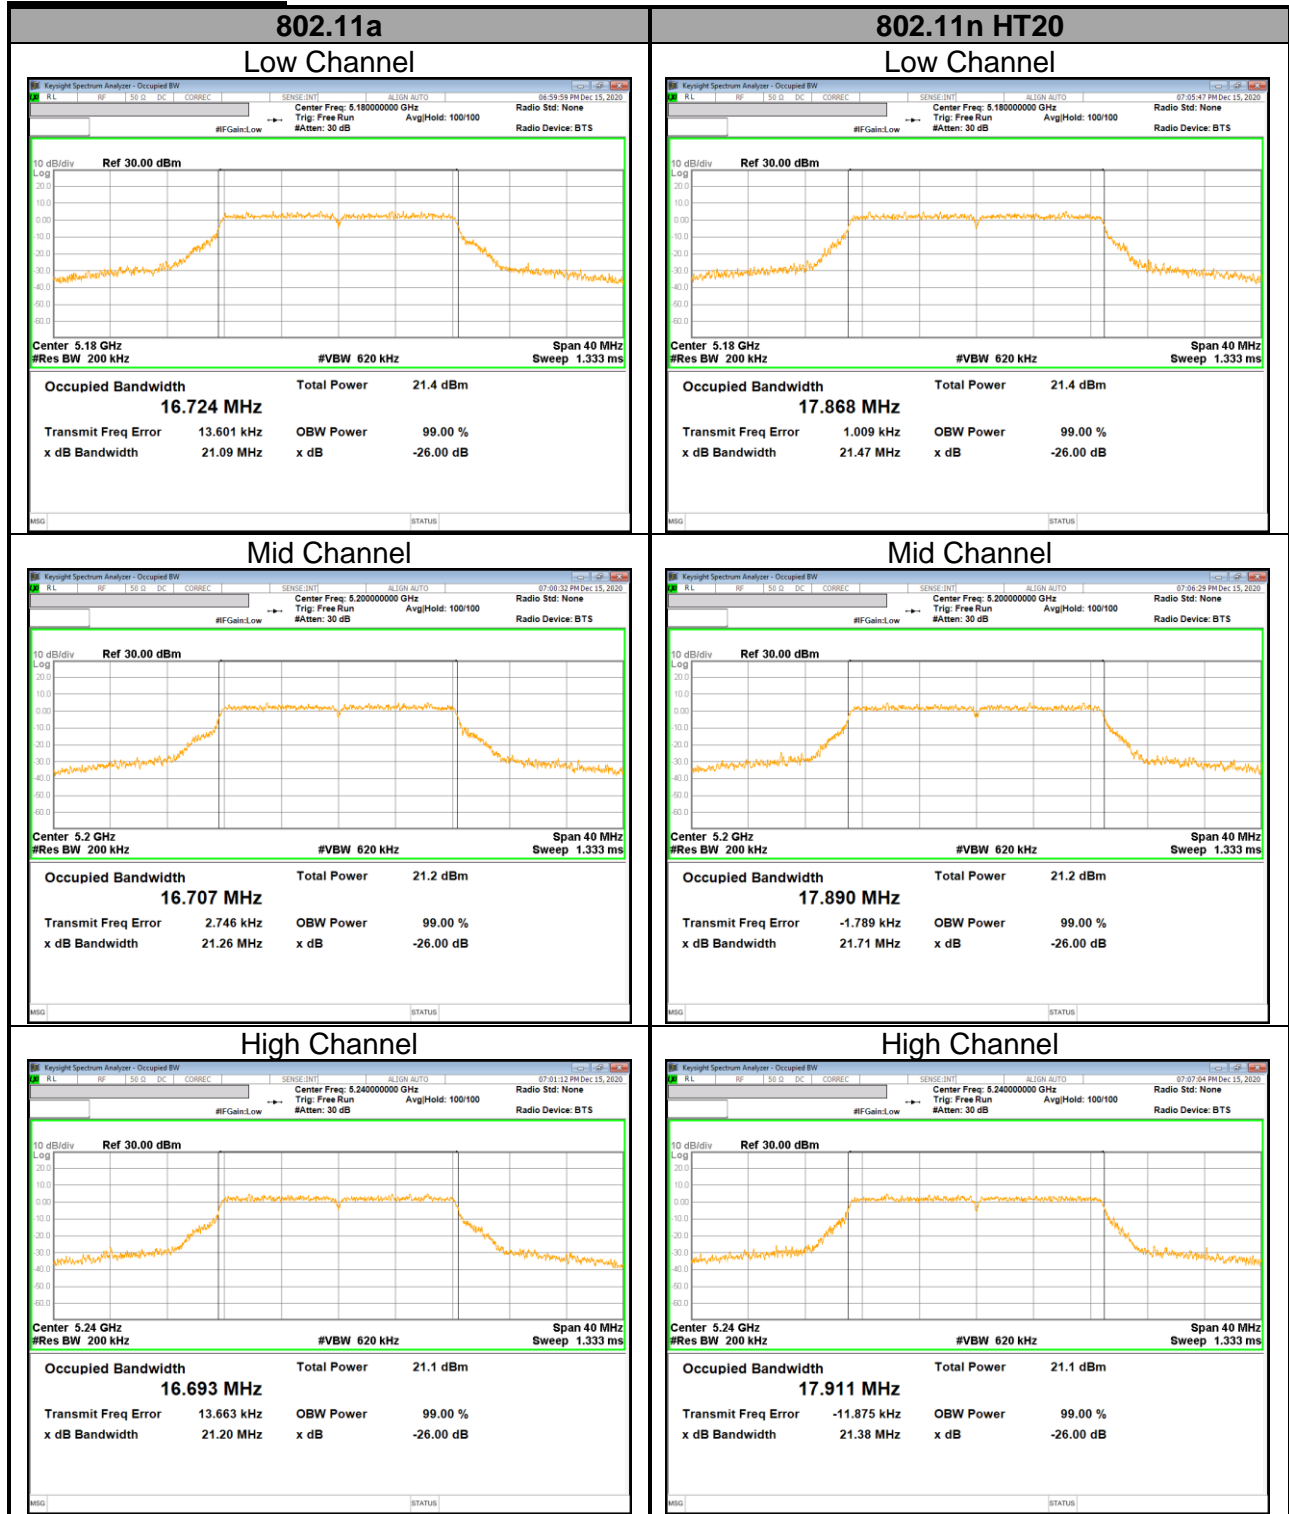





UNII 5.3 GHz Band






UNII 5.5 GHz Band

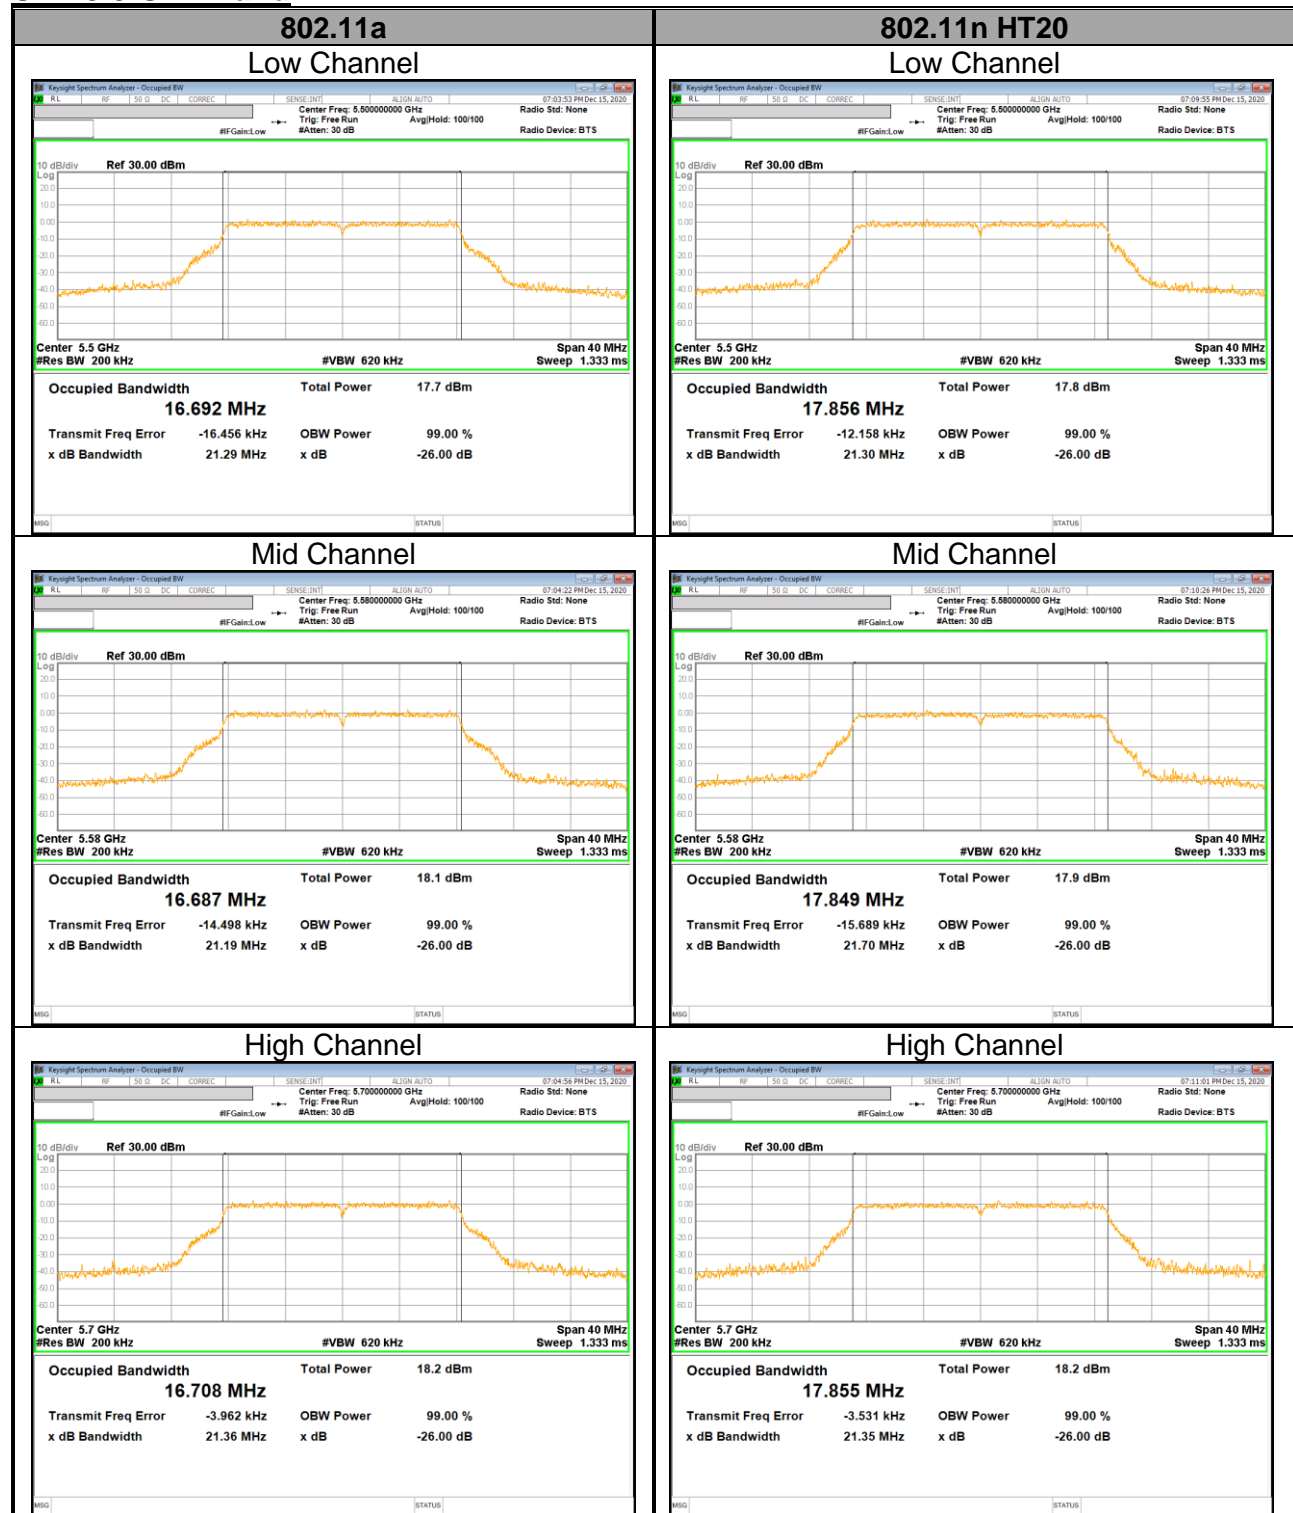

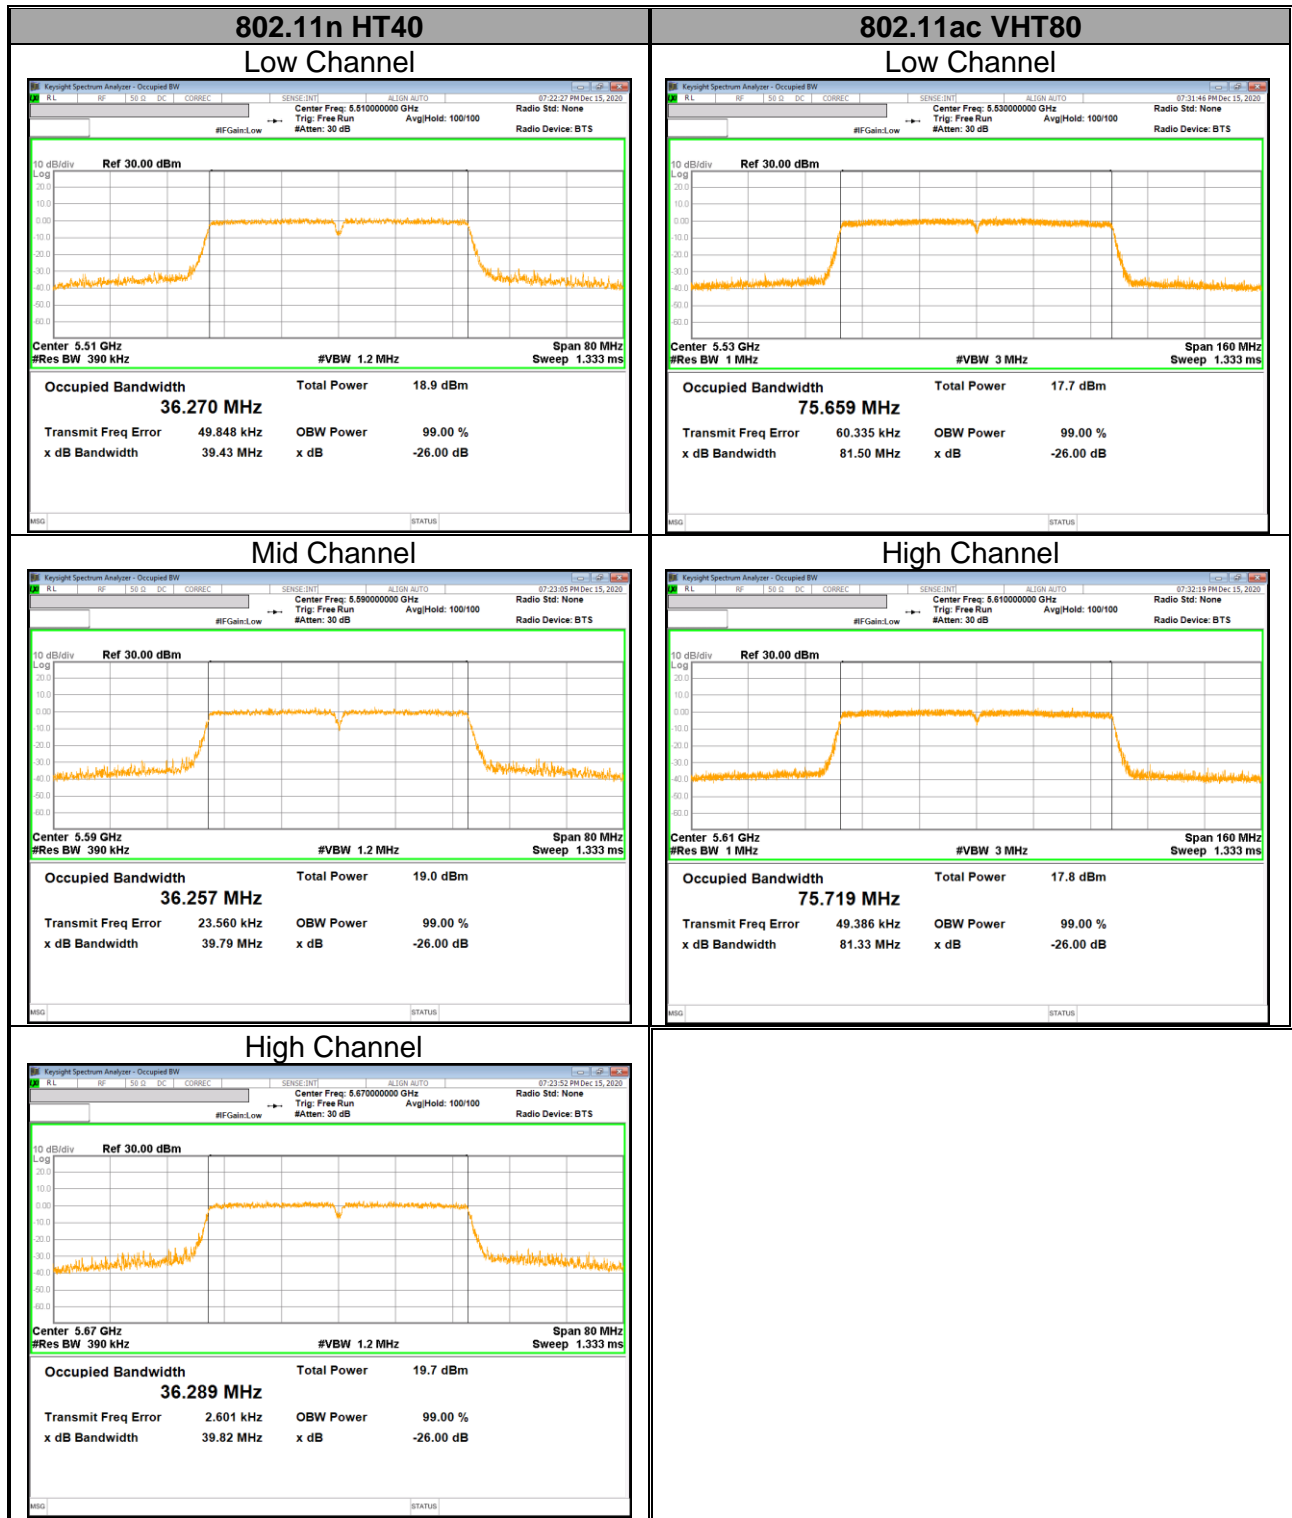

UNII Straddle Channel IEEE 802.11a / n HT20 / n HT40 / ac VHT80 mode

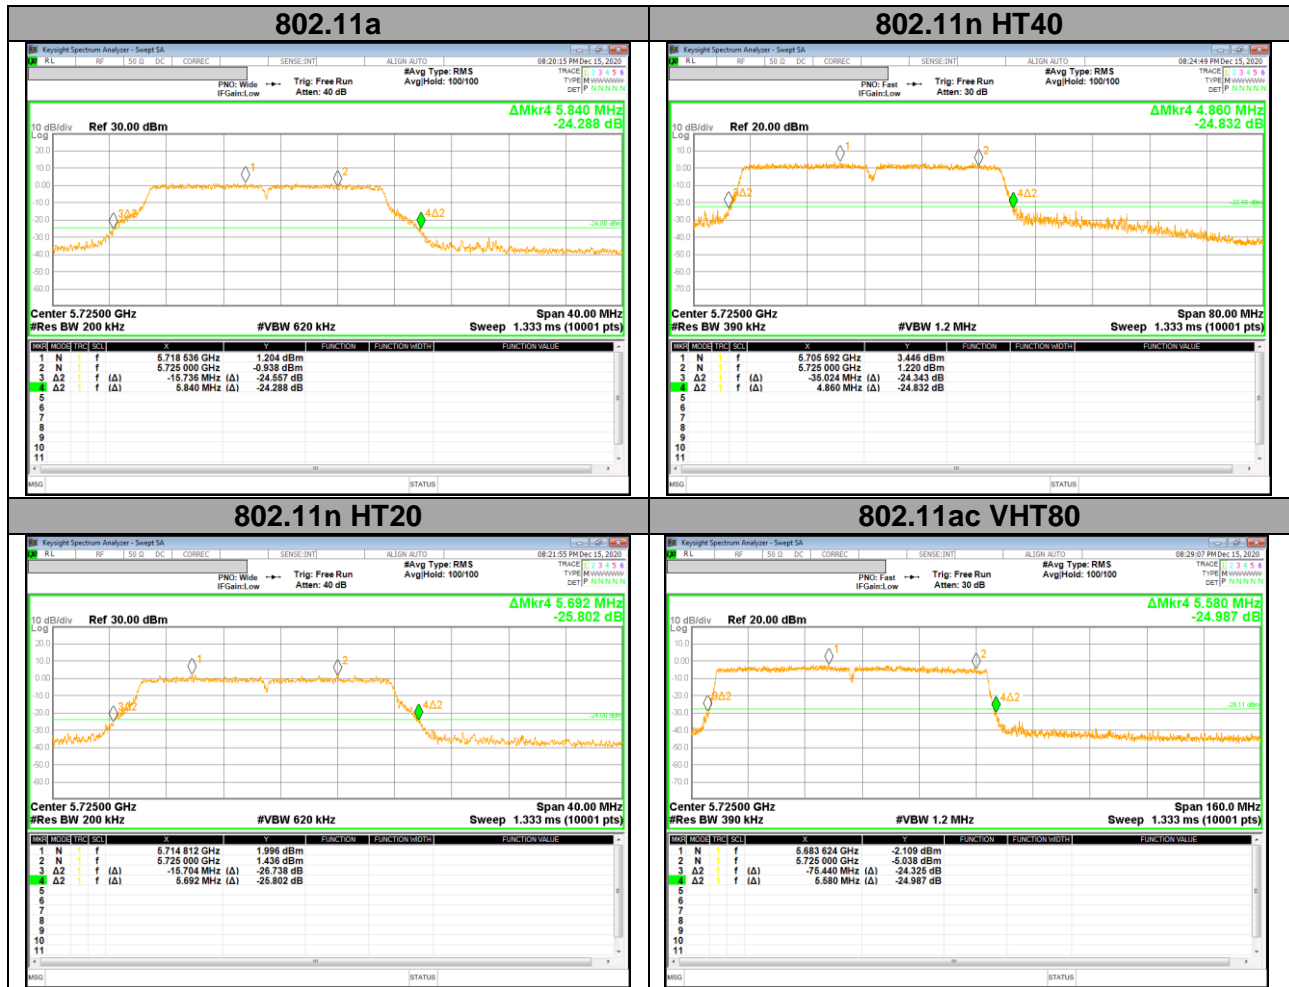

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v02r01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100kHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.


RESULTS




10.1.1. 5.8 GHz BAND

Band	Mode	Channel	Center Freq. [MHz]	6 dB BW [MHz]	Worst	Minimum Limit [MHz]
				ANT1		
UNII-3	802.11a	Low	5745	16.35	16.33	0.5
		Mid	5785	16.34		
		High	5825	16.33		
	802.11n HT20	Low	5745	17.57	17.57	
		Mid	5785	17.58		
		High	5825	17.60		
	802.11n HT40	Low	5755	36.31	36.31	
		High	5795	36.31		
	802.11ac VHT80	Mid	5775	75.70	75.70	

10.1.2. 6 dB BANDWIDTH PLOTS

UNII 5.8 GHz Band

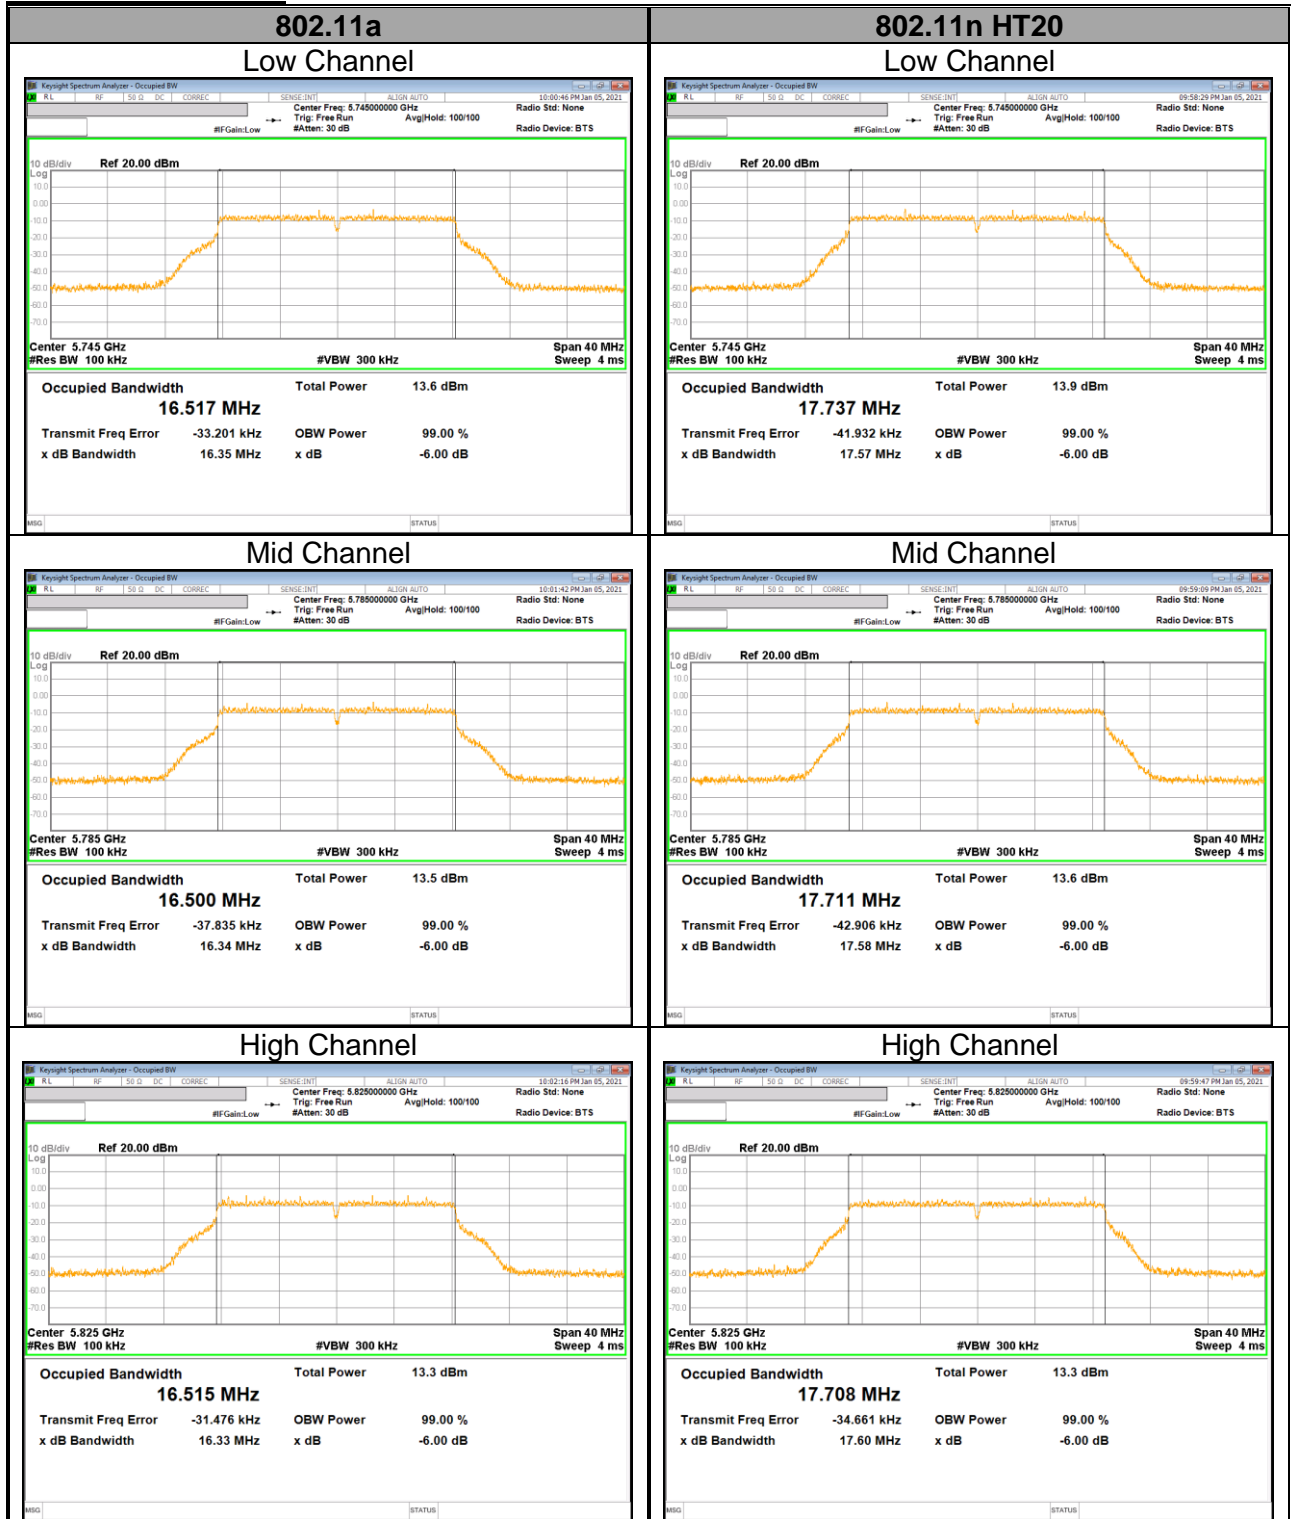

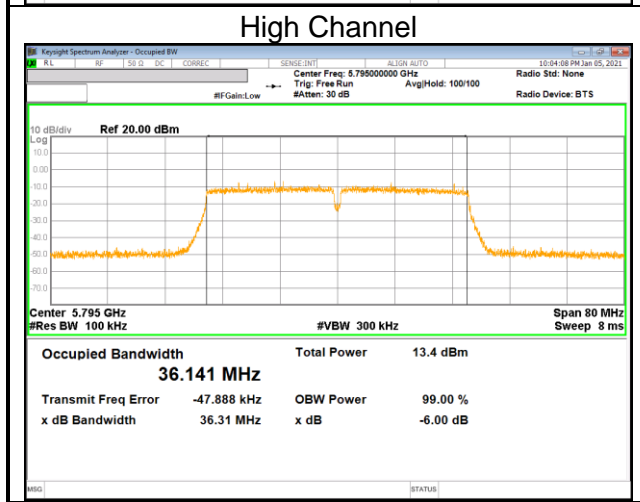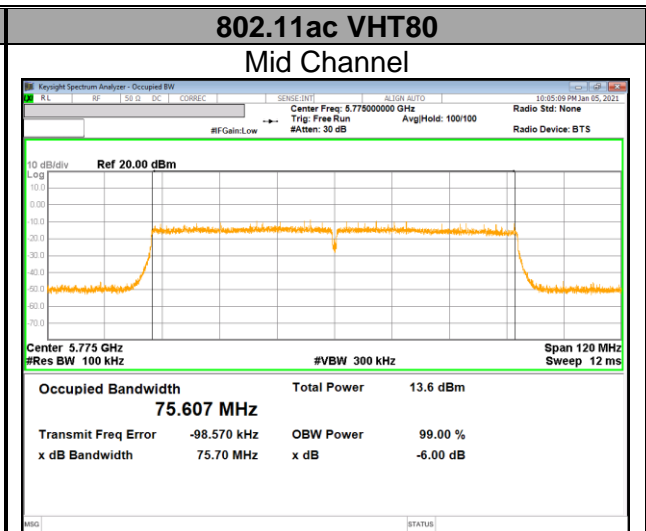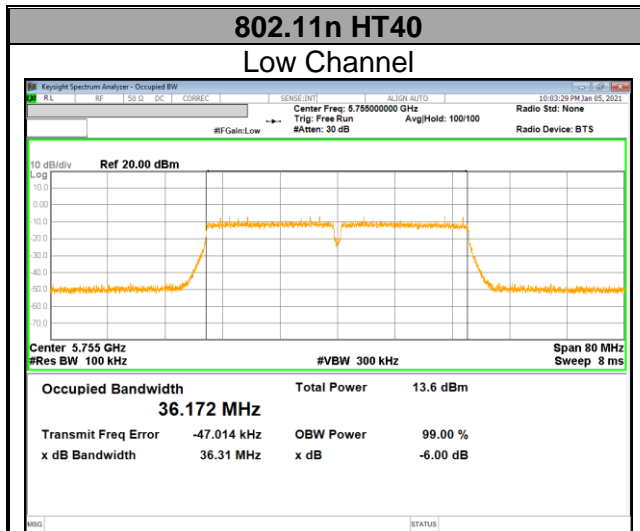

10.2. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1) (2) (3)

FCC

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

TEST PROCEDURE

KDB 789033 Method PM is used for output power.

KDB 789033 Method SA-2 is used for only power of straddle Ch. and PPSD. RBW set to 1MHz (500kHz for the band 5.725-5.85 GHz, the VBW $\geq 3 \times$ RBW, RMS detector and trace averaging). Band power function used for power and peak marker value of the spectrum is used for PSD.

DIRECTIONAL ANTENNA GAIN

For OUTPUT POWER and PSD: The TX chains are correlated and the antenna gains are unequal among the chains. The directional gain is:

Frequency Band [MHz]	Antenna 1 Gain [dBi]
UNII 1 5150 - 5250	-5.70
UNII 2A 5250 - 5350	-4.20
UNII 2C 5470 - 5725	-6.30
UNII 3 5725 - 5850	-5.80

RESULTS

10.2.1. 1Tx MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain, Limits

Band	Mode	Channel	Center Freq. [MHz]	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/MHz]
UNII-1	802.11a	Low	5180	21.09	-5.70	24.00	11.00
		Mid	5200				
		High	5240				
	802.11n HT20	Low	5180	21.38		24.00	11.00
		Mid	5200				
		High	5240				
	802.11n HT40	Low	5190	39.92		24.00	11.00
		High	5230				
	802.11ac VHT80	Mid	5210	81.72		24.00	11.00
	Included in Calculations of Corr'd Power & PSD						
Duty Cycle CF [dB]			802.11a			0.15	dB
			802.11n HT20			0.17	dB
			802.11n HT40			0.16	dB
			802.11ac VHT80			0.17	dB

Output Power Results

Band	Mode	Channel	Center Freq. [MHz]	Corr'd Power [dBm]	Power Limit [dBm]
UNII-1	802.11a	Low	5180	15.89	24.00
		Mid	5200	15.66	
		High	5240	15.42	
	802.11n HT20	Low	5180	15.87	24.00
		Mid	5200	15.64	
		High	5240	15.36	
	802.11n HT40	Low	5190	14.52	24.00
		High	5230	14.43	
	802.11ac VHT80	Mid	5210	12.43	24.00

* Calculation of Output Power : Corr'd Power = Meas Power [dBm] + Duty CF [dB]

PPSD Results

Band	Mode	Channel	Center Freq. [MHz]	Meas PPSD [dBm/MHz]	Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]
UNII-1	802.11a	Low	5180	5.240	5.390	11.00
		Mid	5200	5.157	5.307	
		High	5240	4.882	5.032	
	802.11n HT20	Low	5180	5.082	5.252	
		Mid	5200	4.740	4.910	
		High	5240	4.335	4.505	
	802.11n HT40	Low	5190	0.317	0.477	
		High	5230	0.074	0.234	
	802.11ac VHT80	Mid	5210	-4.889	-4.719	

* Calculation of PPSD result : Corr'd PPSD = Meas PPSD + Duty CF + Corr'd factor [dB]

10.2.2. 1Tx MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain, Limits

Band	Mode	Channel	Center Freq. [MHz]	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/MHz]
UNII-2A	802.11a	Low	5260	21.22	-4.20	24.00	11.00
		Mid	5300				
		High	5320				
	802.11n HT20	Low	5260	21.49		24.00	11.00
		Mid	5300				
		High	5320				
	802.11n HT40	Low	5270	39.75		24.00	11.00
		High	5310				
	802.11ac VHT80	Mid	5290	81.74		24.00	11.00
	Included in Calculations of Corr'd Power & PPSD						
Duty Cycle CF [dB]			802.11a			0.15	dB
			802.11n HT20			0.17	dB
			802.11n HT40			0.16	dB
			802.11ac VHT80			0.17	dB

Output Power Results

Band	Mode	Channel	Center Freq. [MHz]	Corr'd Power [dBm]	Power Limit [dBm]
UNII-2A	802.11a	Low	5260	15.80	24.00
		Mid	5300	15.71	
		High	5320	15.63	
	802.11n HT20	Low	5260	15.99	24.00
		Mid	5300	15.91	
		High	5320	15.84	
	802.11n HT40	Low	5270	14.34	24.00
		High	5310	14.17	
	802.11ac VHT80	Mid	5290	12.11	24.00

* Calculation of Output Power : Corr'd Power = Meas Power [dBm] + Duty CF [dB]

PPSD Results

Band	Mode	Channel	Center Freq. [MHz]	Meas PPSD [dBm/MHz]	Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]
UNII-2A	802.11a	Low	5260	4.721	4.871	11.00
		Mid	5300	4.656	4.806	
		High	5320	4.428	4.578	
	802.11n HT20	Low	5260	4.340	4.510	
		Mid	5300	4.353	4.523	
		High	5320	4.443	4.613	
	802.11n HT40	Low	5270	-0.138	0.022	
		High	5310	-0.631	-0.471	
	802.11ac VHT80	Mid	5290	-5.402	-5.232	

* Calculation of PPSD result : Corr'd PPSD = Meas PPSD + Duty CF + Corr'd factor [dB]

10.2.3. 1Tx MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain, Limits

Band	Mode	Channel	Center Freq. [MHz]	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/MHz]
UNII-2C	802.11a	Low	5500	21.19	-6.30	24.00	11.00
		Mid	5580				
		High	5700				
	802.11n HT20	Low	5500	21.30		24.00	11.00
		Mid	5580				
		High	5700				
	802.11n HT40	Low	5510	39.43		24.00	11.00
		Mid	5590				
		High	5670				
	802.11ac VHT80	Low	5530	81.33		24.00	11.00
		High	5610				
	Included in Calculations of Corr'd Power & PSD						
Duty Cycle CF [dB]			802.11a			0.15	dB
			802.11n HT20			0.17	dB
			802.11n HT40			0.16	dB
			802.11ac VHT80			0.17	dB

Output Power Results

Band	Mode	Channel	Center Freq. [MHz]	Corr'd Power [dBm]	Power Limit [dBm]
UNII-2C	802.11a	Low	5500	11.05	24.00
		Mid	5580	10.93	
		High	5700	11.17	
	802.11n HT20	Low	5500	10.97	24.00
		Mid	5580	10.80	
		High	5700	11.13	
	802.11n HT40	Low	5510	13.80	24.00
		Mid	5590	13.92	
		High	5670	14.20	
	802.11ac VHT80	Low	5530	11.94	24.00
		High	5610	11.91	

* Calculation of Output Power : Corr'd Power = Meas Power [dBm] + Duty CF [dB]

PPSD Results

Band	Mode	Channel	Center Freq. [MHz]	Meas PPSD [dBm/MHz]	Corr'd PPSD [dBm/MHz]	PPSD Limit [dBm/MHz]
UNII-2C	802.11a	Low	5500	1.493	1.643	11.00
		Mid	5580	1.822	1.972	
		High	5700	2.290	2.440	
	802.11n HT20	Low	5500	1.194	1.364	
		Mid	5580	1.359	1.529	
		High	5700	1.866	2.036	
	802.11n HT40	Low	5510	-0.576	-0.416	
		Mid	5590	-0.450	-0.290	
		High	5670	0.206	0.366	
	802.11ac VHT80	Low	5530	-6.008	-5.838	
		High	5610	-5.649	-5.479	

* Calculation of PPSD result : Corr'd PPSD = Meas PPSD + Duty CF + Corr'd factor [dB]

10.2.4. 1Tx MODE IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain, Limits

Included in Calculations of Corr'd Power & PPSD			
Duty Cycle CF [dB]	802.11a	0.15	dB
	802.11n HT20	0.17	dB
	802.11n HT40	0.16	dB
	802.11ac VHT80	0.17	dB

Output Power Results

Band	Mode	Channel	Center Freq. [MHz]	Total Corr'd Power [dBm]	Power Limit [dBm]
UNII-3	802.11a	Low	5745	9.63	30.00
		Mid	5785	9.87	
		High	5825	9.74	
	802.11n HT20	Low	5745	9.65	
		Mid	5785	9.76	
		High	5825	9.87	
	802.11n HT40	Low	5755	9.81	
		High	5795	9.82	
	802.11ac VHT80	Mid	5775	9.78	

* Calculation of Output Power : Corr'd Power = Meas Power [dBm] + Duty CF [dB]

PPSD Results

Band	Mode	Channel	Center Freq. [MHz]	Meas PPSD [dBm/500kHz]	Corr'd PPSD [dBm/500kHz]	PPSD Limit [dBm/500kHz]
UNII-3	802.11a	Low	5745	-5.146	-4.996	30.00
		Mid	5785	-4.797	-4.647	
		High	5825	-4.950	-4.800	
	802.11n HT20	Low	5745	-5.553	-5.383	
		Mid	5785	-5.111	-4.941	
		High	5825	-5.406	-5.236	
	802.11n HT40	Low	5755	-7.923	-7.763	
		High	5795	-7.922	-7.762	
	802.11ac VHT80	Mid	5775	-10.823	-10.653	

* Calculation of PPSD result : Corr'd PPSD = Meas PPSD + Duty CF + Corr'd factor [dB]

10.2.5. 1Tx Mode Straddle channel IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain, Limits

Band	Mode	Channel	Center Freq. [MHz]	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/MHz]
UNII-2C	802.11a	Straddle	5720	15.736	-6.30	22.97	11.00
	802.11n HT20	Straddle	5720	15.704		22.96	11.00
	802.11n HT40	Straddle	5710	35.024		24.00	11.00
	802.11ac VHT80	Straddle	5690	75.440		24.00	11.00
Included in Calculations of Corr'd Power & PSD							
Duty Cycle CF [dB]			802.11a			0.15	dB
			802.11n HT20			0.17	dB
			802.11n HT40			0.16	dB
			802.11ac VHT80			0.17	dB

Output Power Results

Band	Mode	Channel	Center Freq. [MHz]	Meas Power [dBm]	Corr'd Power [dBm]	Power Limit [dBm]
UNII-2C	802.11a	Straddle	5720	10.312	10.462	22.97
	802.11n HT20	Straddle	5720	10.248	10.418	22.96
	802.11n HT40	Straddle	5710	13.680	13.840	24.00
	802.11ac VHT80	Straddle	5690	11.571	11.741	24.00

* Calculation of Output Power : Corr'd Power = Meas Power [dBm] + Duty CF [dB]

PPSD Results

Band	Mode	Channel	Center Freq. [MHz]	Meas PSD [dBm/MHz]	Corr'd PSD [dBm/MHz]	PPSD Limit [dBm/MHz]
UNII-2C	802.11a	Straddle	5720	2.050	2.200	11.00
	802.11n HT20	Straddle	5720	1.892	2.062	
	802.11n HT40	Straddle	5710	0.023	0.183	
	802.11ac VHT80	Straddle	5690	-4.993	-4.823	

* Calculation of PSD result : Corr'd PSD = Meas PSD + Duty CF + Corr'd factor [dB]

10.2.6. 1Tx Mode Straddle channel IN THE 5.8 GHz BAND

Bandwidth and Antenna Gain, Limits

Band	Mode	Channel	Center Freq. [MHz]	Min 26 dB BW [MHz]	Directional Gain [dBi]	Power Limit [dBm]	PPSD Limit [dBm/500kHz]
UNII-3	802.11a	Straddle	5720	5.840	-5.80	30.00	30.00
	802.11n HT20	Straddle	5720	5.692			
	802.11n HT40	Straddle	5710	4.860			
	802.11ac VHT80	Straddle	5690	5.580			
Included in Calculations of Corr'd Power & PSD							
Duty Cycle CF [dB]			802.11a			0.15	dB
			802.11n HT20			0.17	dB
			802.11n HT40			0.16	dB
			802.11ac VHT80			0.17	dB

Output Power Results

Band	Mode	Channel	Center Freq. [MHz]	Meas Power [dBm]	Corr'd Power [dBm]	Power Limit [dBm]
UNII-3	802.11a	Straddle	5720	4.117	4.267	30.00
	802.11n HT20	Straddle	5720	4.673	4.843	
	802.11n HT40	Straddle	5710	3.202	3.362	
	802.11ac VHT80	Straddle	5690	-2.929	-2.759	

* Calculation of Output Power : Corr'd Power = Meas Power [dBm] + Duty CF [dB]


PPSD Results


Band	Mode	Channel	Center Freq. [MHz]	Meas PSD [dBm/500kHz]	Corr'd PSD [dBm/500kHz]	PPSD Limit [dBm/500kHz]
UNII-3	802.11a	Straddle	5720	-1.455	-1.305	30.00
	802.11n HT20	Straddle	5720	-1.639	-1.469	
	802.11n HT40	Straddle	5710	-3.960	-3.800	
	802.11ac VHT80	Straddle	5690	-10.044	-9.874	

* Calculation of PSD result : Corr'd PSD = Meas PSD + Duty CF + Corr'd factor [dB]


10.2.7. OUTPUT POWER AND PPSD PLOTS


UNII 5.2 GHz Band

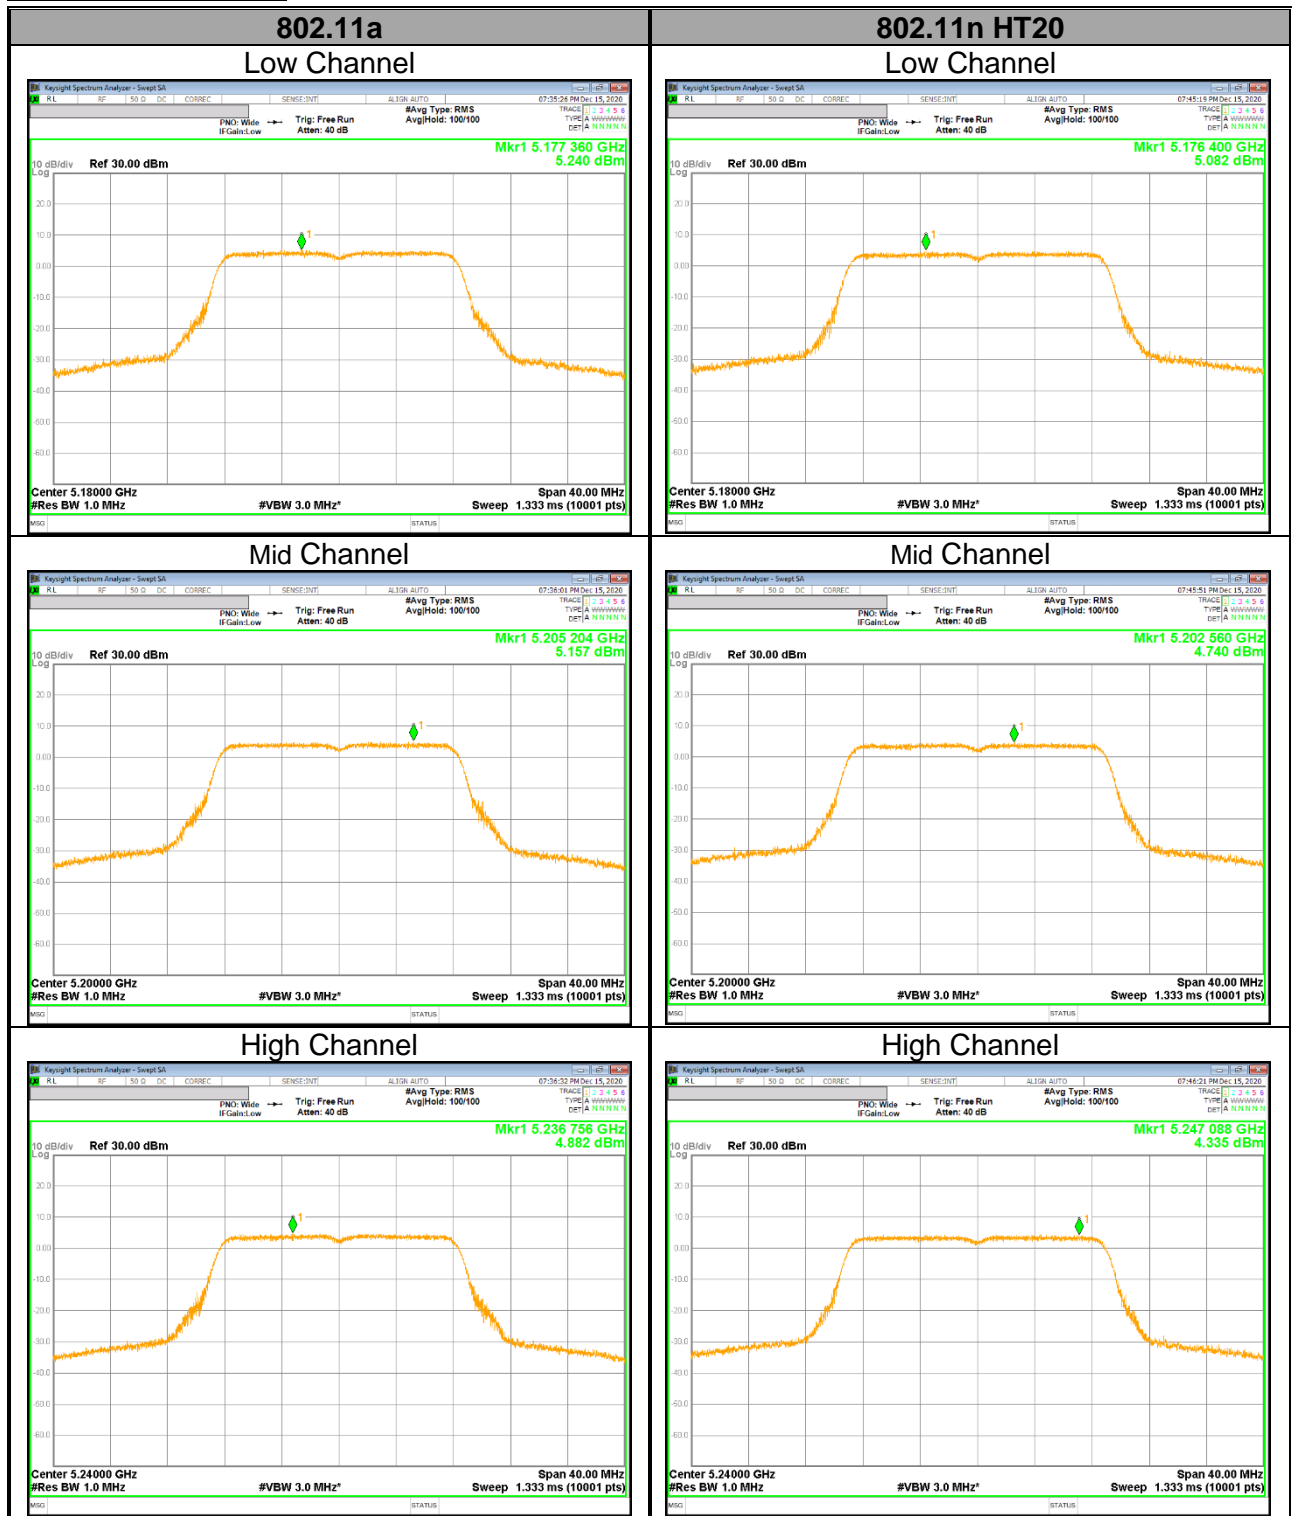

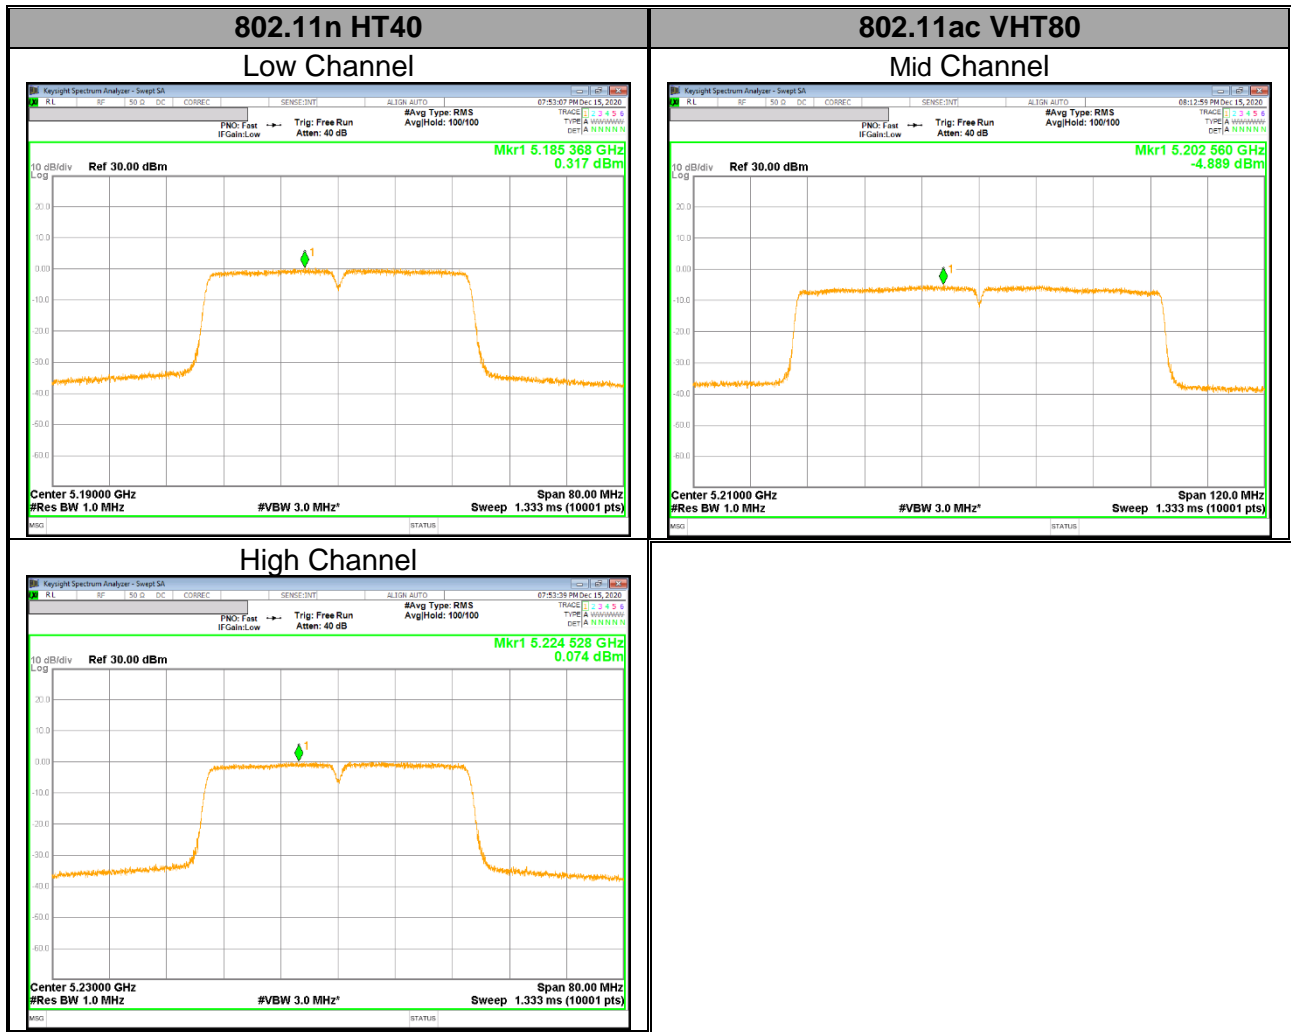



UNII 5.3 GHz Band

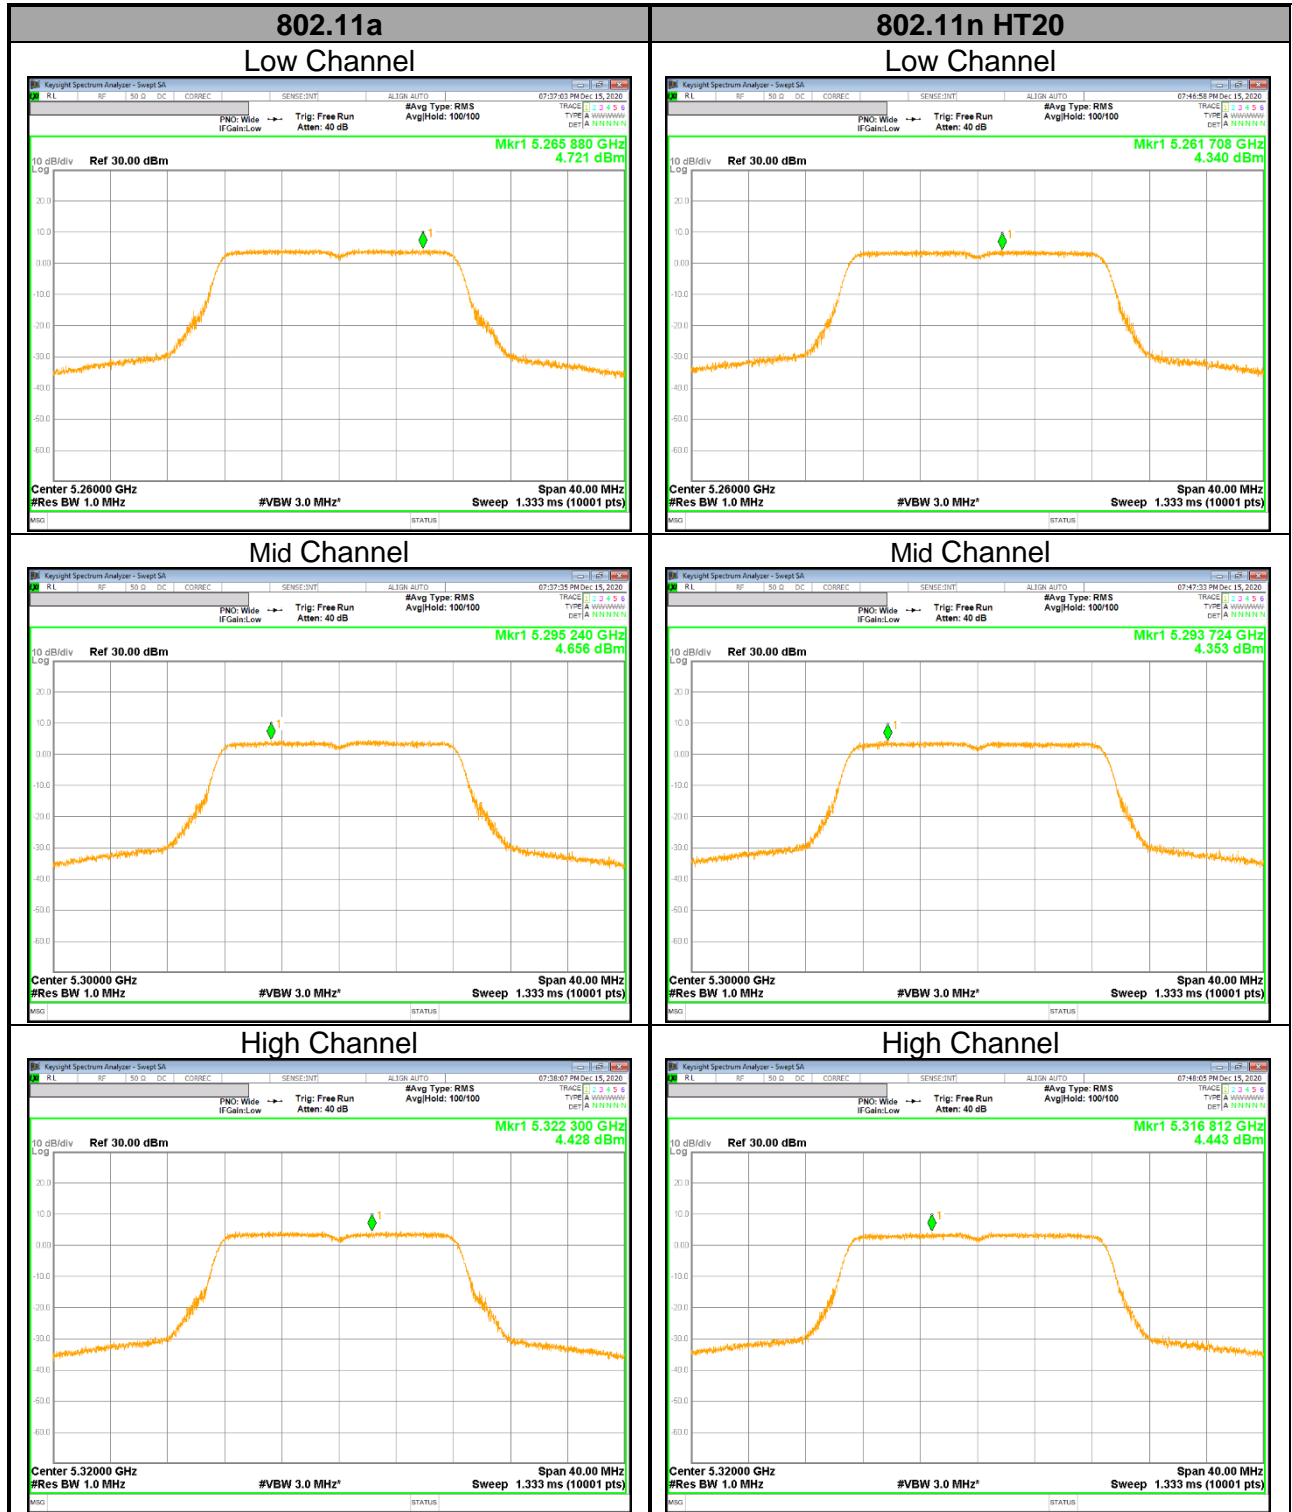

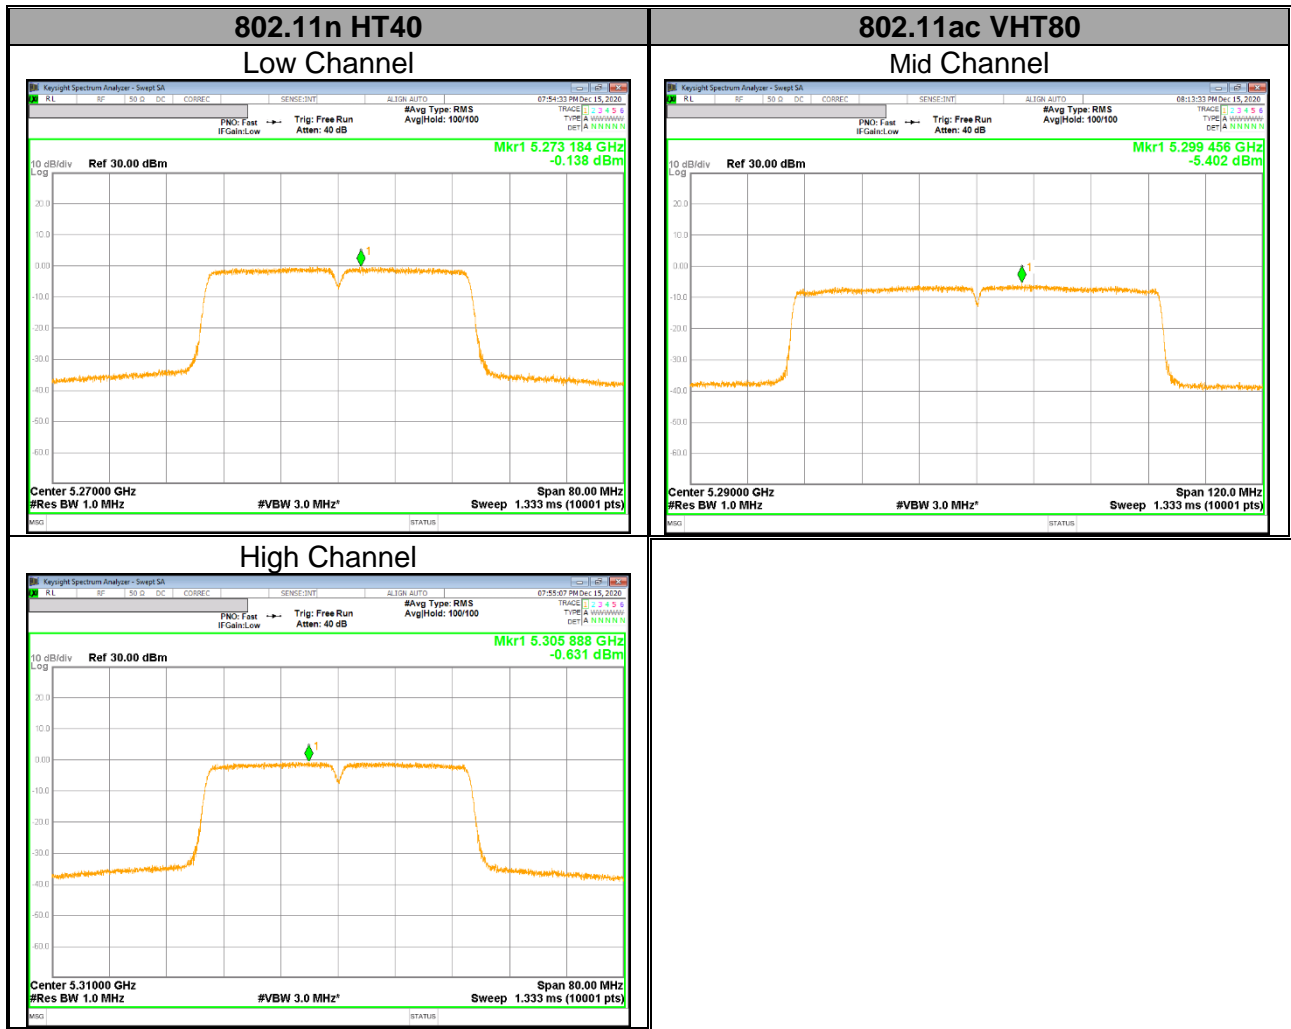



UNII 5.5 GHz Band

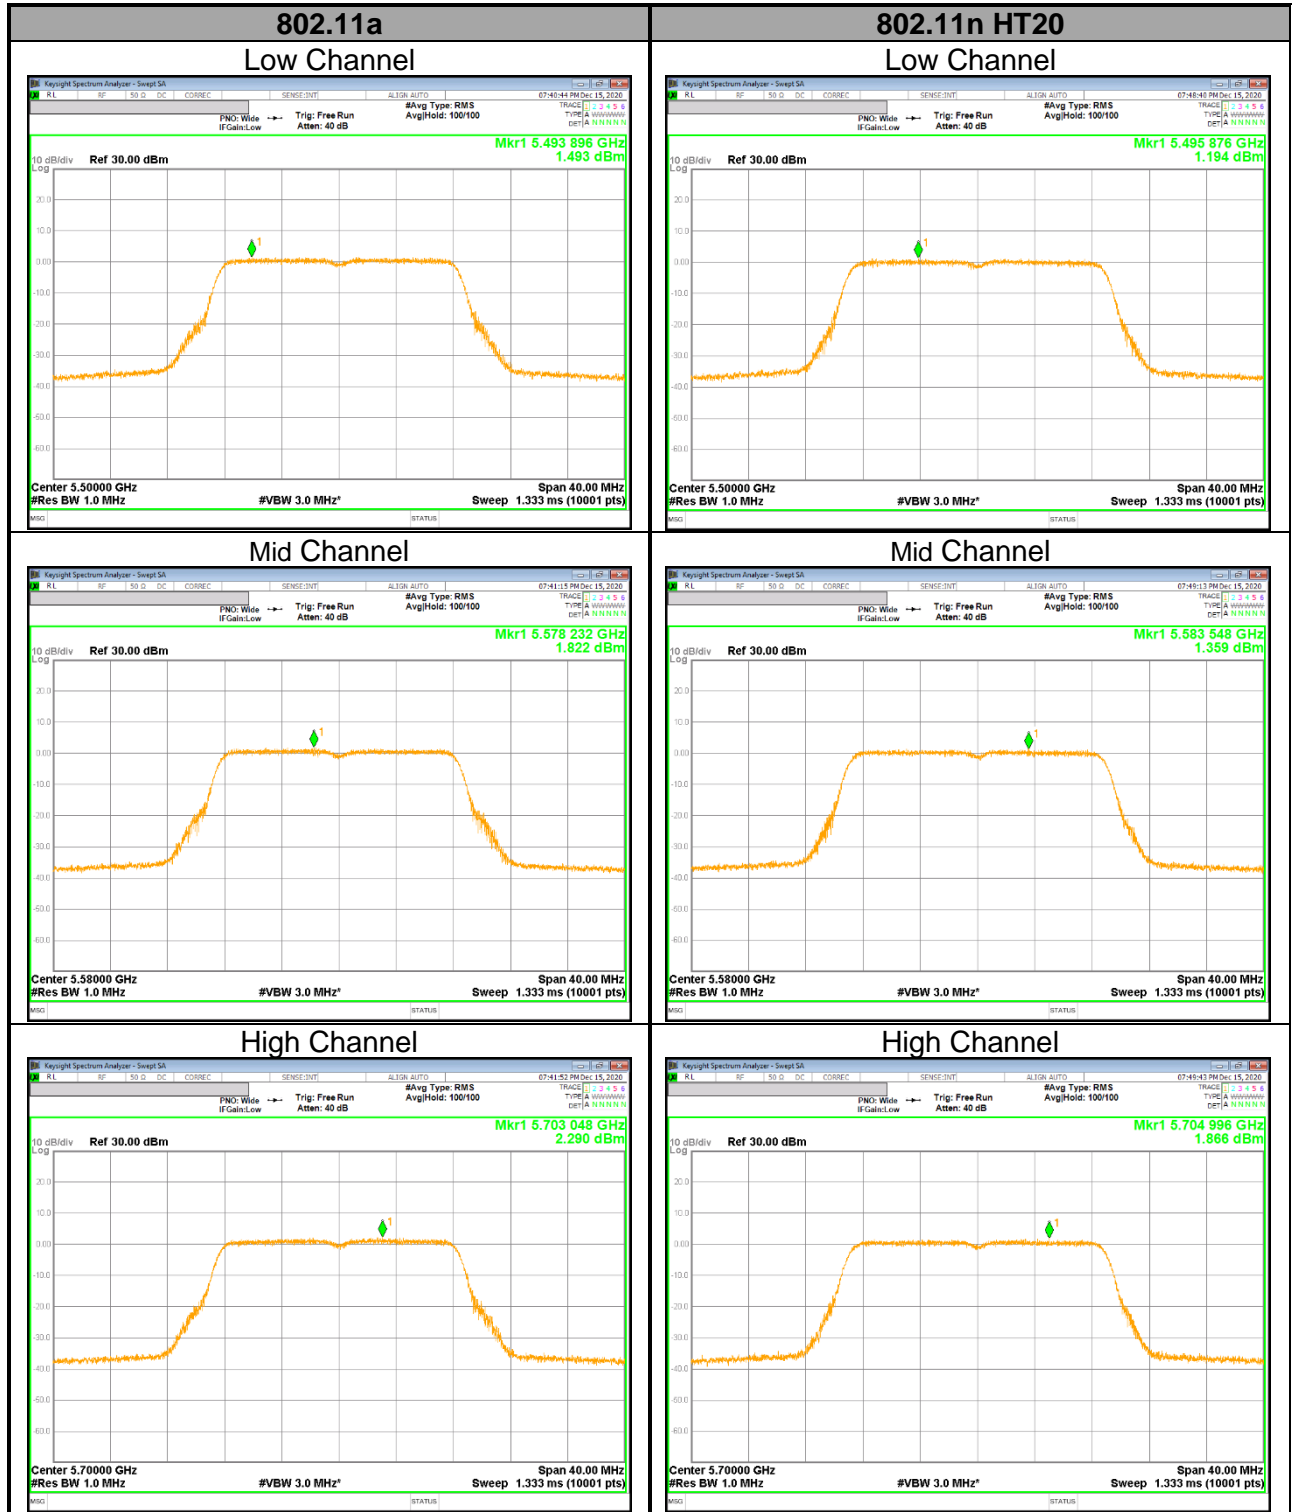

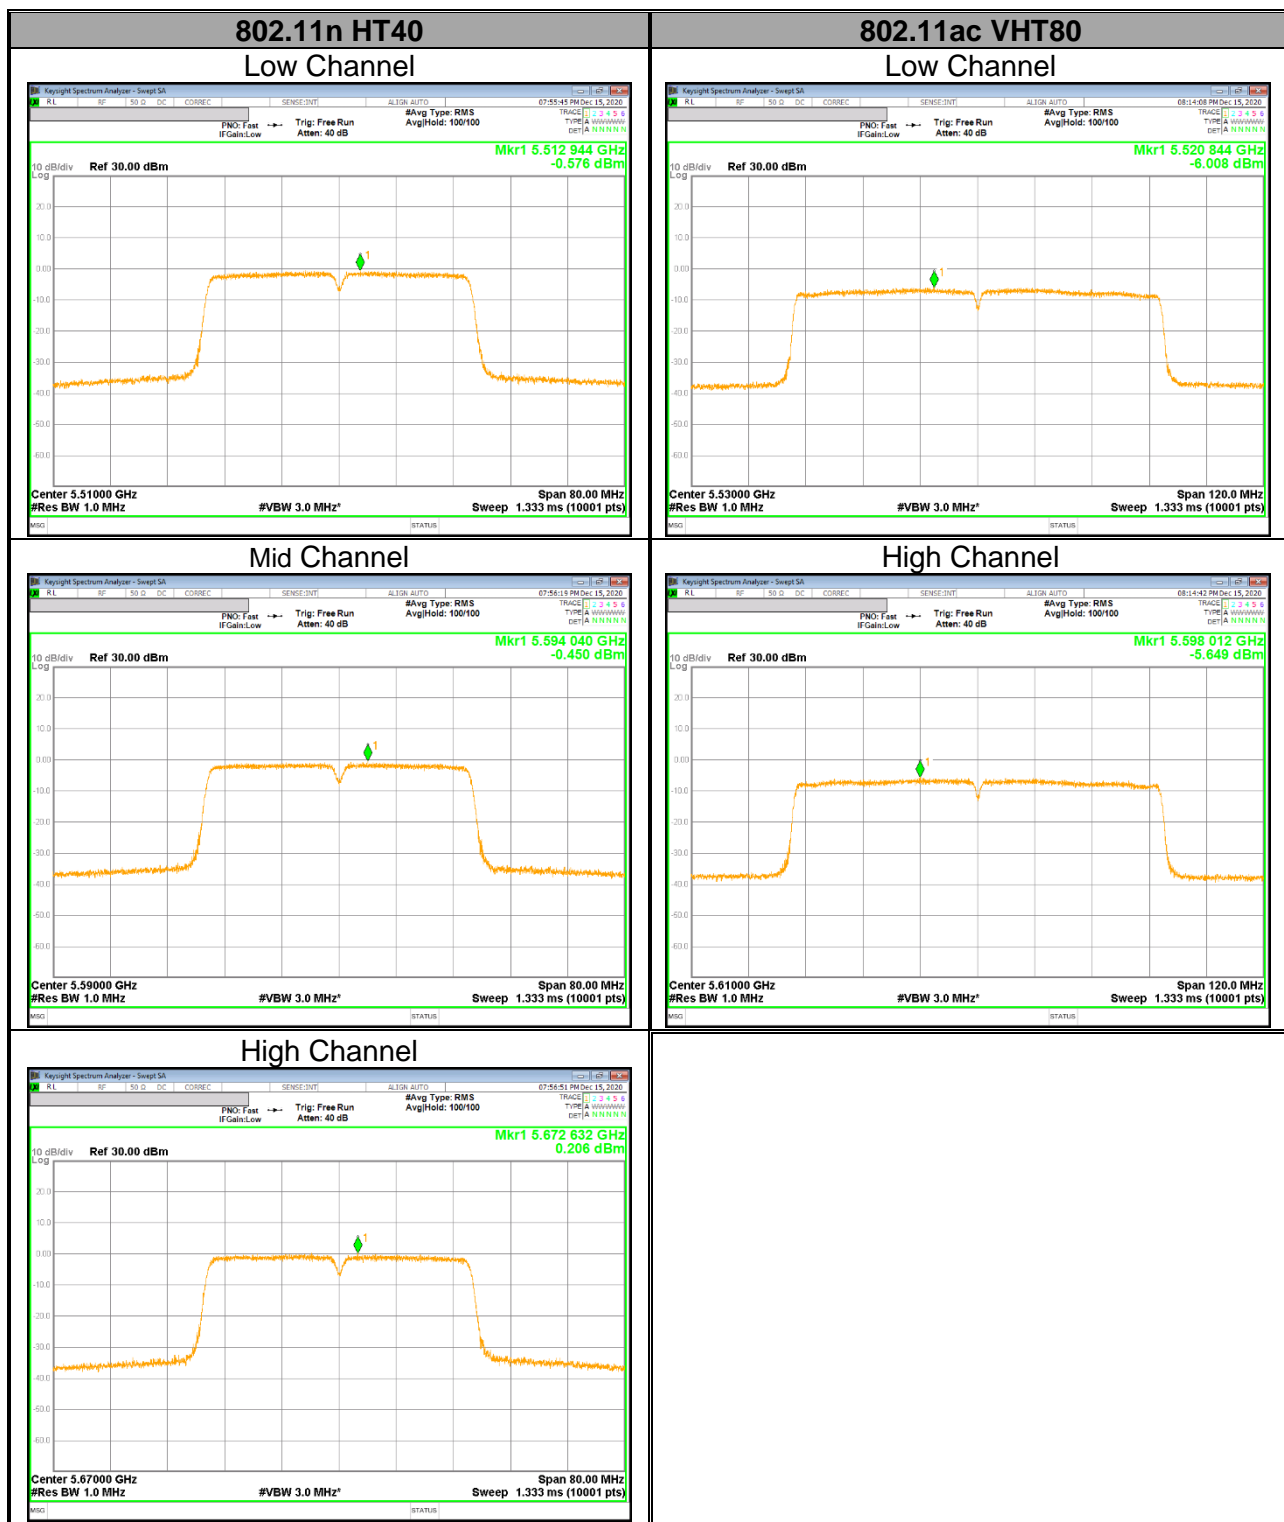

UNII 5.8 GHz Band

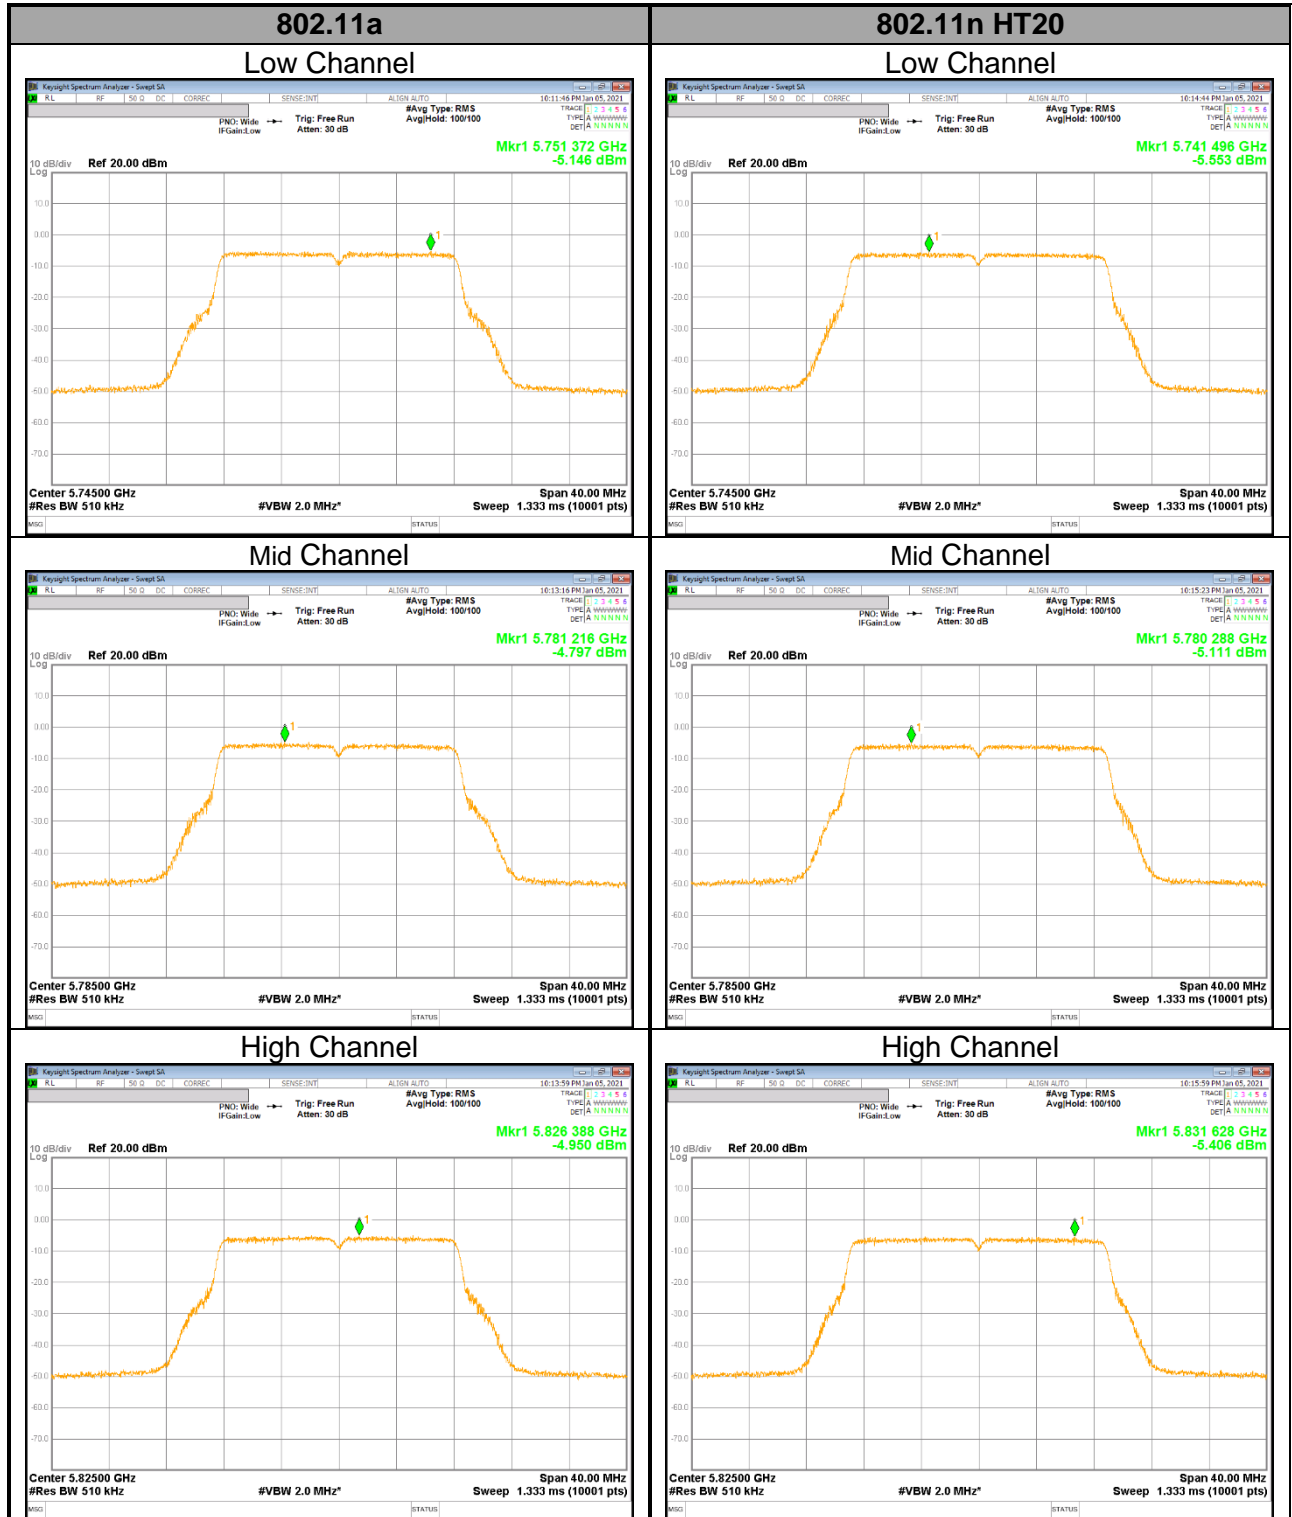

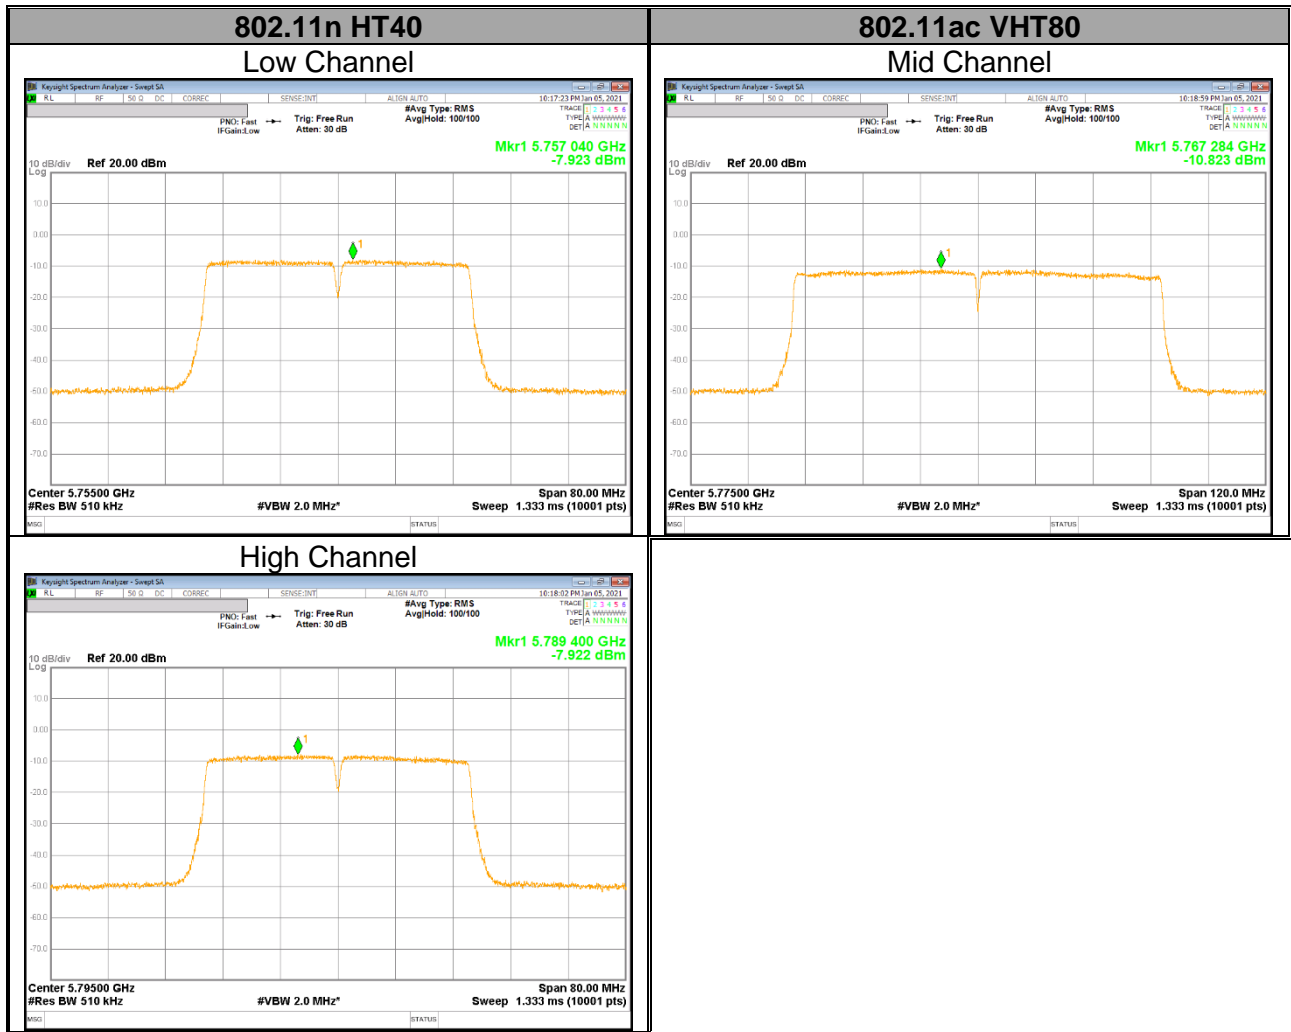

UNII Straddle Ch. Output Power and PSD

